GUIDE TO PORT ENTRY

PORT INFORMATION

Produced by
Colin Pielow

SHIPPING GUIDES LTD.

GUIDE TO PORT ENTRY

Produced by

COLIN PIELOW

M.R.I.N., A.M.N.I.,
A.I.C.S.

SHIPPING GUIDES LTD
NAUTICAL ADVISERS AND PUBLISHERS

SHIPPING GUIDES HOUSE, 75, BELL STREET, REIGATE, SURREY, ENGLAND
Cables: SHIPGUIDE REIGATE Tel: Reigate 42255/6/7 Telex: 944422

GUIDE TO
PORT ENTRY

1979–80

PORT
INFORMATION

WARNING

Every effort has been made to ensure that the information contained in this *Guide* is correct. However, it will be clearly understood that this book is intended as a guide only, that the information cannot be *Guaranteed* correct and that final responsibility must (as always) rest with the Shipmaster.

At certain ports, items of navigational routeings and aids have been included as a means of general guidance only. Shipmasters should have in mind that full and due reference MUST ALWAYS be made to corrected charts of the area, to the appropriate Notices to Mariners, and all or any other navigational notices, warnings or amendments issued by proper Authorities and/or navigational aid services.

The sketch maps are included for general interest and must not be used for navigational purposes.

The entire contents of the *Guide to Port Entry* as issued are the copyright of the publishers, namely Shipping Guides Limited.

Any person wishing to make use of this *Guide* must first seek prior permission in writing from Shipping Guides Ltd. Proceedings will be taken against any person reproducing or copying any part of the contents of the *Guide* without permission.

© Shipping Guides Limited, 1979.

Printed in Great Britain by
Billing & Sons Limited, Guildford and London

CONTENTS

Page

WARNING NOTICE iv

FOREWORD (Updating – Questionnaire – Agents) vi

PUBLISHER'S NOTE ix

TEXT (The text has been arranged alphabetically by Countries and also by Ports within the Countries) 1

INDEX (Countries and Ports) .... (Tinted Section) 1201

LATE REPORTS (After Tinted Section)

ALBANIA	Durres
ALGERIA	General Skikda
ANGOLA	Cabinda
BAHAMAS	South Riding Point
BARBADOS	Bridgetown
CANARY ISLANDS	Las Palmas
CHINA	Shanghai
COLOMBIA	Turbo
FRANCE	Nice
GABON	Ovendo
HONDURAS	La Ceiba
INDONESIA	Macassar
IRAN	Sirri Island Terminal
ISRAEL	Ashdod
ITALY	Oristano
KOREA (South)	Chinhai
MALAYSIA	Pasir Gudang
NIGERIA	Forcados
NETHERLANDS ANTILLES	Bullen Bay
PANAMA	Puerto Armuelles
PORTUGAL	Sines
SAUDI ARABIA	Jubail
U.S.A.	Burnside (St. James)

FOREWORD

Shipmasters, Shipowners or Managers, Port Authorities, Administrators and Agents, are earnestly requested to assist our work in up-dating the Guide *by providing written comment, information, amendments or corrections, plus additional details of any ports or terminals, to the following address:*

SHIPPING GUIDES LIMITED,
SHIPPING GUIDES HOUSE,
75 BELL STREET,
REIGATE,
SURREY,
ENGLAND

All communications will be acknowledged and will be most useful, since it is only by this means that the *Guide* will remain of great value to the user and will be up to date and thoroughly professional in content.

For assistance and guidance in the submission of information, a reprint of the items presently covered by the *Guide* is placed here under. Additional items will also be most welcome.

N.B. PLANS, DIAGRAMS, DRAWINGS AND SKETCHES: As you will note, this 1979/80 edition of "Guide to Port Entry" contains over one thousand three hundred port plans and diagrams that have been reproduced from plans and drawings very kindly sent to us by numerous Port Authorities, Agents and shipboard personnel. We hope that the special plan section will prove interesting and useful.

Presently however, the special plan section is to an extent incomplete, since there are many ports and mooring facilities for which we have not yet received the necessary plans for reproduction purposes. We are anxious to secure plans, diagrams, drawings or sketches of ports and facilities not presently shown in our special plan section, and therefore request that Port Authorities and/or Agents at the places concerned be kind enough to pass us this data together with the necessary permission for reproduction. We would also be very grateful if ship's officers calling at ports not already covered in our special plan section, could find it possible to provide us with diagrams or sketches of the facilities which would be suitable for reproduction in our later editions and/or which might be re-drawn as required by our own art department prior to reproduction.

PORT INFORMATION KINDLY REQUESTED

PORT LIMITS: The seaward boundaries of the port within which a vessel is considered to be an "arrived ship" and (subject to Charter-Party Terms) laytime will commence.

DOCUMENTS: The matter of documentation is one of the most important items to be included in the *Guide*, and we would like to be sure that ALL requirements are included in order that Masters will be in a position to prepare all necessary documentation before arrival and thus ensure speedy clearance. (E.g. Number of Crew Lists, Passenger Lists, Customs, Documents, Health Documents, Manifests, Bills of Lading, Ship's Papers, Ship's Certificates, etc., etc.)

PILOTAGE: Manner in which vessel approaching the port applies for a Pilot. That is, telegraphic address of Pilot Station, amount of advance notice of ETA required, and VHF channel or frequency to be used when contacting Pilot Boat or Pilot Station. If possible, a description of Pilot Boat; particular light or sound signals to be made by vessels requiring a Pilot; the *exact* area where the Pilot Boat is located or where the Pilot has to be taken on board and also any alternative area in the event of bad weather and Pilot Boat not in usual station; details of any specific requirements on the part of Pilots with respect to boarding and safety measures; location of anchorage for vessel awaiting a Pilot.

ANCHORAGES: Boundaries, areas and depths of safe anchorages.

RESTRICTIONS: Details of any restrictions imposed upon entry, for example at night time, or in accordance with state of tide and draft restriction.

MAX. SIZE: Maximum permissible length, breadth, and draft for any vessel entering the port or for oil-carriers proceeding to installations outside the main port area, also state of tide governing these dimensions.

HEALTH: Pratique procedure and action necessary to obtain pratique. Also action necessary in the event of any suspected disease or fever on board. Also when pratique is automatic, for example vessels entering after calling at another port in the same country.

RADIO: Name and call sign of radio station through which it is best for a vessel to route ETA cables to Agent, Receivers, etc.

VHF: Fullest possible data concerning VHF Radio communication facilities in operation at the port including advices required from vessels approaching the port, arriving at the port, when manoeuvring within the port area, and when sailing. Details of standard communication procedures and numbers of Channels used in calling, further communication and safety, as may be applicable with respect to Pilotage, Tugs, Port Authority, Quarantine or other craft or shore-stations.

RADAR: Details of existing Port Radar Service, also if the Master may contact the Radar Service by means of ship's radio or by VHF, and the Channel number or frequency to be used.

TUGS: Position where tugs normally join the vessel. Also whether usual for ship's lines or tug's lines to be used, and if optional, the usual charge for use of tug's lines.

BERTHING: Details of available berths, including length of quay, maximum permissible ship-draft at Low Water (indicating whether Salt or Fresh Water), whether load/discharge is by shore equipment or by ship's own gear, and other relevant data, together with advice of cargoes handled at respective berths.

CRANES: Fullest possible information concerning type, working loads and numbers of shore-cranes available at respective berths for cargo handling. Details of heavy-lift cranes ashore or afloat, with lifting capacities. It is also helpful to know at which ports, or berths within a port, that cranes are *not* available and a vessel is required to use her own gear.

BULK CARGO FACILITIES: Details of berths and cargoes handled, length of quay, maximum permissible draft (indicating Salt or Fresh) at Low Water, berth equipment, maximum height of discharging-gear above High Water Level, and maximum Loading/Discharge rates. Cargoes intended to be covered by this heading are, Grain, Ores, Coal, Fertilisers, Sulphurs, Copra, etc.

SPECIALISED CARGO-HANDLING FACILITIES: Details of berths, specially equipped for handling containers, or roll-on/roll-off traffic; berths handling liquid chemicals or LPG carriers. Please note that it is also useful to know if the port does *not* have any of these facilities.

BRIDGES: Details of any particular arrival times required in order to pass through particular bridges, and maximum clearances, that is height of bridge to waterline.

STEVEDORES: Any particular ETA advices required in order to arrange gangs. Details of main commodities and average load or discharge rates.

MEDICAL: Whether necessary for Agents to receive advance notice of required medical attention and the amount of notice required; also if hospital facilities available; also any other relevant medical information such as particular inoculations required, vaccination/fever certificates, etc.

TANKERS: Diameter of load/discharge lines in order that Masters may know whether or not it is necessary to fit reducing pieces before arrival; slop (residue) discharge facilities, and S.G. and A.P.I. of local types of oil (loading ports only). Number of tanker berths and maximum permitted drafts at these berths. Average load/discharge rates.

DENSITY: (SALINITY): Average salinity of water in the port.

FRESH WATER: Availability, method of delivery, rate of delivery and approximate cost per ton.

FUEL: Grades (viscosities) available, amount of advance notice required, and method of delivery.

FIRE PRECAUTIONS: Any specific precautions particularly respecting tankers (that is, other than usual non-smoking precautions, etc.).

CONSULS: Names of countries having Consuls at the port.

REPAIRS: Whether all types of deck and engine repairs are possible, and if not then what types of repairs are able to be carried out.

DRY DOCKS: Dimensions of largest dry dock and also the number of smaller docks.

SURVEYORS: Advice of which Classification Societies are represented at the port, or at nearby ports, e.g. Lloyds, A.B.S., N.V., etc.

GANGWAY/DECK WATCHMEN: Whether service of watchmen necessary or to be recommended and if so, the cost of watchmen.

HATCHES: Whether opening/closing is normally carried out by crew or stevedores.

CUSTOMS ALLOWANCES: (Tobacco/Wine, Spirits). Quantity permitted for each crew member to be held out of Bond.

CARGO GEAR: Whether load/discharge effected by shore gear or by ship's gear, and details of any special cargo equipment, e.g. heavy lift cranes, etc.

REPATRIATION: If facilities exist for effecting crew changes and arranging any necessary repatriation.

AIRPORT: Distance from airport and whether airport is served by regular airlines; otherwise number of flights per day or week.

TIME: Local time in relation to GMT and dates/details of any alterations made to clocks during the year.

HOLIDAYS: Dates and details of official holidays and advice whether or not cargo work can be arranged on those days.

POLICE/AMBULANCE/FIRE: Telephone numbers of these three services, that is, the nearest departments.

TELEPHONES: Whether arrangements exist for placing telephones on board and if so the approximate cost for this connection.

SERVICES: Details of any special services available, e.g. tank-cleaning equipment, facilities for discharge of tank-washings, compass adjusting, etc., etc.

SHORE LEAVE: Whether crew members are allowed ashore or not.

IDENTIFICATION CARDS: Whether shore passes issued or whether seaman's book is sufficient.

REGULATIONS: Any particular or unusual regulations for the port.

DELAYS: What delays in berthing, load or discharge or bunkering can normally be expected.

DEVELOPMENTS: Details of expected draft increases, new installations, berths, etc., expected in the foreseeable future together with expected dates of completion.

SHIP'S OFFICERS REPORTS: Information is earnestly sought from Ship Masters and other serving officers giving corrections, amendments and additions to existing information, together with their professional advices or comment upon recommended or required procedures for entering or sailing port, including advice of their experience of the port either generally or specifically. Useful items of experience and suggestions of other Ship Masters are of great value, and will be printed under a special heading.

GENERAL: Any other information that you feel may be of value to the Ship Master that is not already covered by the previous questions.

AUTHORITY: Name, address, and other details of local Port Authority.

AGENT: At the foot of many of the ports in this *Guide* we have an additional heading entitled "Agent". The purpose of including this item has been to provide Shipowners, Managers, and Operators with prompt access to the name, address, telephone, telex numbers, and cable addresses, etc., of an experienced Agent at the port concerned.

Of course, it will be understood that the Agents named in the *Guide* are not necessarily the only Agent at that port; however, demands on available space preclude the inclusion of other reputable Agency companies and we trust that other such companies will understand and appreciate the position. We have been obliged therefore to include details of one Agency company only, but by doing so we hope to have provided a further service to the user of the *Guide*.

ROBERT PEDLOW, *Editor*,
Shipping Guides Ltd.

PUBLISHER'S NOTE

Since the publication of our 1977/78 edition, we have been privileged to receive an unprecedented volume of correspondence from serving Shipmasters and Ship's Officers. We are especially appreciative of the many advices received from these gentlemen, and are anxious to take this opportunity of again expressing our very sincere thanks for their substantial assistance in providing information for inclusion in this edition. We hope that the results of our work will prove worthy of all the professional advice and kind words received.

Our sincere thanks are also due to Port Authorities, Ship's Agents, Pilots and many other shipping-business persons throughout the world, without whose help our work would not have been accomplished. We are indeed very grateful for the considerable interest shown towards us in this way, and trust that all the guidance received will be found to be suitably presented.

My personal thanks, together with those of other colleagues who have been engaged in this production, are particularly due to our Editor, Robert Pedlow, who by his dedication and effort has been largely responsible for attaining the standard of work produced.

As holders of this publication will appreciate, we daily receive many letters, telexes and telephone calls from Shipowners, Brokers and others seeking advice concerning port approaches, facilities and general shipping information, and for this purpose we respectfully request the provision of all up-to-date material of this kind which may then be passed forward to the general good of all shipping people.

To all seafarers and persons engaged in the shipping industry we send our best wishes, our trust that the "Guide to Port Entry" will prove of positive value, and our hope that we may look forward to remaining in close contact in the future.

Reigate 1979

COLIN PIELOW

Albania

DURRES: 41.19 N. 19.28 E.

DOCUMENTS: Completed on arrival.
RESTRICTIONS: Vessels arriving from ports in Yugoslavia, Italy and Greece must give notice of arrival 48 hours in advance. Vessels arriving from ports in other countries must give notice of arrival 5 days in advance. Notice of arrival is sent by radio to Adetare Durres with following information: Vessel's name and flag; name of last port; draft on arrival; cargo description and distribution; particulars of vessel's tonnage and length.
PILOTAGE: Compulsory. Arriving vessels should anchor and await pilot in position 41° 15′ 08″ N. 19° 26′ E. Pilot available in daylight hours only. Entrance is through buoyed channel, depth 33 ft.
MAX. SIZE: Controlled by berth depth. Maximum draft 28 ft. 6 in.
HEALTH: Free pratique given when Pilot boards provided vessel's health declaration is satisfactory.
RADIO: Vessels should maintain regular contact with Durres Radio up until time of entry into Albanian territorial waters, which extend 10 miles off shore.
TUGS: Port Authority supplies tugs for mooring and unmooring on Pilot's recommendations.
BERTHING: General cargo wharf No. 5 permitted draft 28 ft. 6 in. All other berths, permitted draft 21 ft. 6 in.
MEDICAL: Doctor and hospital facilities available.
TANKERS: One oil berth, at the East Mole, depth 23 ft. Tank cleaning facilities available.
FRESH WATER: Available ex wharf at all berths.
FUEL: Limited quantity available for emergency only.
OPENING/CLOSING HATCHES: Carried out by stevedores.
IDENTIFICATION CARDS: Shore passes issued by local police.
REPAIRS: State shipyard can effect limited hull and engine repairs.
AIRPORT: Rinas airport, distance 35 km.
TIME: GMT plus 1 hour.
HOLIDAYS: New Year (January 1st and 2nd); Proclamation of the Republic (January 11th); Labour Day (May 1st); October Revolution (November 7th); Independence Day (November 28th); Liberation Day (November 29th). No work performed on Sundays and holidays.
SHORE LEAVE: Crew may use seamen's club in port area.
AUTHORITY: Drejtorija e Portit Durres.

SARANDE: 39.52 N. 20.02 E.

DOCUMENTS-RESTRICTIONS: Refer to "Durres."
PILOTAGE: Compulsory. On arrival vessels should anchor and wait for Pilot in position 39° 51′ 50″ N, and 20° 10′ 10″ E. Pilot available only during daylight hours.
BERTHING: Larger vessels work cargo at anchor only. Ship's gear used.
HEALTH: Free pratique given when Pilot boards provided vessel's health declaration is satisfactory.
RADIO: Durres Radio.
FRESH WATER: Not available.
FUEL: Not available.
GENERAL: See "Durres" for General Information.
AUTHORITY: See "Durres".

SHENGJIN: 41.49 N. 19.35 E.

DOCUMENTS, RESTRICTIONS: Refer to "Durres".
PILOTAGE: Compulsory. On arrival vessels should anchor and await Pilot in position 41° 48′ N, 19° 35′ E. Pilot available only during daylight hours.
MAX. SIZE: Draft 18 ft.
HEALTH: Free pratique given when Pilot boards provided vessel's health declaration is satisfactory.
RADIO: Durres Radio.
TUGS: One small tug available.
BERTHING: Two piers in harbour, one of which is used for larger vessels.
FRESH WATER: Limited supply by barge.
FUEL: Not available.
GENERAL: See "Durres" for general information.
AUTHORITY: See "Durres".

Algeria

ALGIERS: 36.50 N. 03.00 E. (See Plan Book)

DOCUMENTS:
1 Cargo Manifest required for all cargo including that in transit for non-Algerian ports.
8 Crew Lists.
2 Crew and Passenger Personal Effects Lists.
1 Stores List, including Bonded Stores.
1 Currency Manifest.
2 Lists of arms, ammunitions or Military Stores (or "Nil" Declaration).
1 Private Bond and Beer List.
1 Declaration of Health.
1 Vaccination List.

Immigration officials may require to inspect all discharge books or passports. Customs regulations are strictly interpreted. Care should be taken to ensure that all ships' papers are perfectly in order. Vessels arriving with incomplete or inaccurate documentation have been subjected to severe delays and penalties.
PILOTAGE: Compulsory. Available day or night. Pilot boards vessel about 0.5 mile from end of Wattier jetty. Pilot boat is black with insignia of 2 white anchors.
ANCHORAGE: Algiers Bay is crescent-shaped with Cape Caxine on the West and Cape Matifon on the East. Depth 25-30 m. Bottom is good holding ground, and vessels are sheltered from West and Northwest.
RESTRICTIONS: None if Port Authority is advised by Radio Algiers or by Agent.
MAX. SIZE: Vessels of 25,000 tons proceed normally. Length not restricted; maximum draft 38 ft.
HEALTH: Health Officer boards vessel on arrival.
RADIO: Algiers Radio, operates continuously.
TUGS: Three available of 600 to 800 h.p. and also one of 1,000 h.p. for towing in harbour; two larger available for open sea, 1,500-1,300 h.p.
BERTHING: 54 berths available, total distance of 9,519 m. plus 2 berths of 250 m. each for tankers. All general cargo berths have cranes with lift of 3-6 tons.
STEVEDORES: Available.
MEDICAL: All assistance available.
TANKERS: Quay de Lorient: 2 berths, with depth alongside 11.50 m. Deballasting facilities available.
DENSITY: Salt water.
FRESH WATER: Delivered by pipe-line to quay, or by water barges.
FUEL: Deliveries by pipe-line on most quays or by barge. Big ships are supplied by barge in the roads.
FIRE PRECAUTIONS: A special notice with instructions is delivered to tankers. Fire station established within port area.
GANGWAY/DECK WATCHMEN: Service by three experienced companies arranged by Agent.
OPENING/CLOSING HATCHES: Normally opened by crew, or by port workers.
IDENTIFICATION CARDS: Not required.
CONSULS: All principal countries are represented in Algeria.
REPAIRS: All repairs available. Two floating cranes, 1×120 tons, 1×50 tons.
DRY DOCKS: Two: one of 136 m. long, 18.50 m. width, and 8 m. deep. The second of 74.30 m. long, 15.50 m. width and 5 m. deep.
REPATRIATION: Frequent departures for Europe by boat or plane.
AIRPORT: Dar-el-Beida at a distance of 20 km. from Algiers; several flights daily.
TIME: GMT plus 1 hour (Winter). GMT plus 2 hours (May-October).
HOLIDAYS: 1st January; 5th July; 1st November; Labour Day; Proclamation Day; plus religious holidays – Aid Seghir; Aid Kebir; New Year's Day (Egira); Achoura, and Mouloud. Friday is now considered as the weekly rest day in Algeria.
POLICE/AMBULANCE/FIRE: Police 63.01.61; Fire Brigade Service 63.71.22.
SHORE LEAVE: Allowed.
AUTHORITY: Capitainerie du Port.

ANNABA: 36.58 N. 07.47 E.

DOCUMENTS: Refer to Algiers.
PILOTAGE: Compulsory when entering, leaving or shifting in harbour, vessels arriving during night and wishing to enter the basin must anchor at 2 nautical miles to East of Southern Lighthouse at main entrance (red occulting light) on steady sand bottom of 65 to 100 ft. depth.
ANCHORAGE: Quite good anchorage well protected against West or North winds at about 3 nautical miles to North of harbour with depths of 40 to 60 ft. on rocky and sandy steady bottom.
MAX. SIZE: Length 656 ft. draft 33 ft., breadth no restriction.
RADIO: Cable Agents giving ETA or to Harbour Master by cable or radio telephone via Annaba Radio Station which is permanently watching on 2182 k/cs.
VHF: Harbour Master's Office can be contacted on Channels 16 and 14.
TUGS: Two tugs available each of 700 h.p. both fitted with radio telephone and two fire appliances.
BRIDGES: No bridges or power cables crossing port area.
BERTHING: Harbour is open to merchant navigation every day from 0500 to 2200. In case of necessity vessel will be handled at any time.

STEVEDORES: Available. Working hours (whole days), normal hours: 0700/1020–1400/1720. Shifts: 0630/1230-1300/1900-2000/0200. Working night and holidays, overtime 50%.
TANKERS: Two tanker berths in outer port, entrance 43 ft. The first is at Lyon's Jetty consists of two dolphins 180 ft. apart. Second at South Jetty consists of two dolphins 180 ft. apart. 8 in. and 10 in. pipe-lines supply the oil installation.
FRESH WATER: Plentiful supply of water alongside wharves at a rate of 8 to 14 t.p.h.
FUEL: Bunkering available. No coal.
GANGWAY/DECK WATCHMEN: Performed by ship's crew.
OPENING/CLOSING HATCHES: Performed by stevedores.
CARGO GEAR: Cranes: 18 electric or diesel shore cranes with lifting capacities from 3 to 6 tons; 1 electric shore sheers of 110 tons and 1 diesel-electric sheers hulk of 80 tons.
IDENTIFICATION CARDS: Required.
SHORE LEAVE: Allowed.
REPAIRS: One graving dock fitted with two rolling cradles on slipways, lifting capacity 100 and 200 tons. Divers and frogmen available.
GENERAL: Prevailing winds generally of N.W. and West. Storms from these directions are blocked by mountains which lie behind harbour. Harbour is only exposed to storms from East and N.E. which are very rare. There is practically no swell or surf into harbour. Tidal variation about 1 ft. and water level ranges about 31 in. dependent on season. Low waters from February to June and high waters from June to February.
AUTHORITY: Directeur du Port.

ARZEW: 35.50 N. 00.16 W.

DOCUMENTS: Refer to Algiers.
APPROACHES: There are numerous good navigational aids visible from seawards to vessels approaching Arzew Bay. The oil storage tanks are visible for a considerable distance seawards, and the methane gas flare in the Southwest corner of the bay is clearly visible at night. In addition to Isle de Arzew lighthouse, the mooring buoys are fitted with red winker lights, visible one mile, but too much reliance must not be placed on these last lights. The pillar buoys on the berths are fitted with blue winker lights. All these buoys form a good radar target and are clearly visible over 5 miles on the radar screen.
PILOTAGE: Pilotage is compulsory. A Pilot from the pilotage station of Arzew will board vessels and assist Master to berth.

Communications from tankers will be via the international radio station at St. Lys, which is in telex communication with the Arzew terminal. Contact with the Arzew terminal can be made on VHF Channel 16. Vessel will then be informed by the control room of the frequency to use, either Channel 12 or 14 for mooring purposes.

Masters are advised to provide for safe access of port personnel an accommodation ladder rigged to end 10 ft. above the water, and a pilot ladder alongside to provide access to the accommodation ladder.
ANCHORAGE: Vessels requiring to anchor on arrival normally use services of the Pilot. Anchorage fees are charged whether the Pilot is used or not. Sea bottom of rocks, sand and mud.
RESTRICTIONS: Vessels may enter or sail by day or night. Tankers berthing on the sea line berths may be restricted by bad weather, heavy wind or swell.
TUGS: Four tugs available, from 900 h.p. to 1,600 h.p. Two tugs normally required for berthing and unberthing. The tow line should be supplied by the vessel. Tugs join inward bound vessels at about 1.5 miles from harbour entrance.
MAX. SIZE: *Inside Harbour.* Dry cargo berth for vessels up to 7.50 m. draft. LPG and refined crude berth for vessels up to 8.0 m. draft. Methane Terminal, two berths for vessels up to 10 m. draft.

Sea Line Tanker Berth. For tankers up to 150,000 tons.
HEALTH: Free pratique is not granted by radio. For tankers berthing on the sea line, pratique may be granted by a visiting sanitary officer or by the Pilot when he boards, providing the health declaration is satisfactory. For vessels berthing inside the harbour, the Health Officer will board on arrival.

Vessels calling at Arzew must give their ETA 48 and 24 hours prior arrival, naming the ports called within the last 10 days.

Crew must be vaccinated against cholera and smallpox. Vaccination books must be valid and a check is made before free pratique is granted.
RADIO: Oran Radio and Algiers Radio both listen on international frequencies. Tankers normally use St. Lys Radio.
BERTHS: *(Inside Harbour)*: Berths No. 1 and 2 used for loading fertilisers, suitable for vessels up to 225 m. length with maximum draft 6.50 m. Berth No. 3 for discharging of general cargo, vessels up to 100 m. length, 7.50 m. draft. Berth Nos. 4 and 5 for loading salt in bulk and discharging general cargo, for vessels up to 220 m. length, 6 to 7 m. draft. Berth No. 7 used for unloading LPG and refined crude, for vessels up to 100 m. length, 8 m. draft.

Methane Terminal. Two loading berths for liquid methane, each 400 m. long for vessels up to 10 m. draft.

Sonatrach Terminal. Three sea line berths are located about one mile from Arzew Harbour breakwater, in approximate position 35° 50′ North, 00° 16′ West.

At sea line berths Nos. 1 and 2, minimum 23,000 d.w.t., maximum 85,000 d.w.t.; minimum length 540 ft.; loading rate 3,000 t.p.h. Depths up to 92 ft.

At sea line berth No. 3, maximum 150,000 d.w.t., minimum length 640 ft.; maximum length 948 ft.; draft up to 68 ft.; loading rate up to 5,500 t.p.h. Depth in the berth up to 92 ft. Tankers over 80,000 d.w.t. must be capable of loading and deballasting at the same time. Minimum depth of water in the berthing area is 73 ft.
BERTHING: Use of ship's anchors will not be permitted when manoeuvring into berth. Two tugs are available to assist in berthing. On arrival vessels should have ready eight mooring lines, four forward and four aft and a tow rope at each end as it will be necessary to position the vessel with her own gear before securing to the heavy wires. Good rope messengers should be ready at each end of the vessel to pick up these wires.

There are three mooring buoys at the bow and three at the stern. All buoys are fitted with 5 in. wire ropes. Ships of moderate tonnage may be moored using two bow buoys and two quarter buoys only. Hoses will be lifted from both sides of the vessel using ship's gear and crew.

The port and starboard derricks must be ready for use before berthing. The safe working-load must be at least 5 tons. The Loading Master can refuse to berth a tanker whose lifting tackle is not correctly rigged or in good working condition.

Three 12 in. hoses are connected for loading, 2 on one side and one on the other. Loading rates up to 5,500 t.p.h.
BALLAST: Pilots are empowered to refuse to berth a vessel if in their opinion the vessel has insufficient ballast, or her trim is such that it would prevent safe loading.

The Arzew deballasting plant is presently not available for discharging dirty ballast ashore.

Vessels required to arrive with clean ballast only, which may be discharged to sea, subject to Master's sole responsibility for oil pollution risks.
STEVEDORES: Vessels must cable their ETA at least 24 hours before arrival and confirm before 1700 hrs. on day prior to arrival or before 1000 hrs. if vessel will arrive in the afternoon of the same day. Gangs are ordered before 0700 hrs. for mornings and at 1030 hrs. for afternoons. Shifts are from 0730–1050 hrs. and 1530 to 1650 hrs. Extra shifts from 0730–1330 hrs. and from 1330 to 1930 hrs.
DENSITY: 1030.
MEDICAL: All treatment of ship's crew is arranged by private doctors through ship's Agent. No hospital facilities at Arzew. Seriously injured crew are taken to Oran, 45 kms. away, for hospitalisation. Vessels arriving with sick crew on board should notify Agents well in advance to make arrangements for hospitalisation on arrival. No patient is to be disembarked without notification to the Health Officer for his agreement.
FRESH WATER: Not available.
FUEL: Not available at Sonatrach Terminal. May be arranged for vessels inside harbour, subject to advance notice.
WATCHMEN: Shore watchmen are compulsory for vessels loading fertiliser or discharging LPG or refined crude in the harbour area. For tankers loading at the sea line berth, watchmen are at Master's discretion.
CUSTOMS ALLOWANCES: 200 cigarettes and an opened bottle of spirits per man.
IDENTITY CARDS: On arrival, the immigration control all passports or seamen's books. Shore passes are given at the harbour gate in exchange for passports, seaman's book, or in the case of French seamen, their identity cards.
AIRPORT: Nearest at Oran (Es Senia).
CONSULS: Nearest at Oran.
TIME: GMT plus 1 hour (Winter). GMT plus 2 hours (May-October).
TELEPHONES: Available only at methane berths. At the sea line berths tankers may communicate using VHF Channel 16 to Arzew Terminal.
DEVELOPMENTS: Additional berthing facilities under construction for gas tankers up to 200,000 d.w.t. and crude tankers up to 250,000 d.w.t. Depth of water 13.5 m.
AUTHORITY: Capitainerie du Port.

BEJAIA (BOUGIE) 36.45 N. 05.05 E. (See Plan Book)

DOCUMENTS: Refer to Algiers.
PILOTAGE: Compulsory within pilotage zone between Cap Carbon to the West and Ras Attia to the East. Contact pilot station by VHF Channel 16 or Telex 92087. Tel. 92.05.02, or 92.05.03, and 92.03.39 at night. International code signals used to call Pilot who boards at the limit of pilotage zone. Pilot ladder should always be placed on port side.
ANCHORAGE: Suitable anchorage in all weathers will be indicated by the Pilot.
RESTRICTIONS: No night movements for tankers with LPG or refined petrol cargoes.
MAX. SIZE: Tankers: Length 260 m. Draft up to 13 m. Waiting zone for vessels in ballast; depth 10 m.
Commercial Port: Draft between 7 m. to 9 m.
HEALTH: Free pratique given by Brigade Maritime on arrival, unless suspected disease on board when Port Doctor will visit the ship. Pratique is automatic after calling at another Algerian Port.
RADIO: Alger Radio.
TUGS: Available under direction of Pilot by VHF contact. Ship's lines always used. 2 tugs required for berthing and unberthing.
BERTHING: *Sonatrach Oil Terminal:* 3 loading piers for crude oil.
Pier No. 1 for vessels up to 11.50 m. draft. Four 10 in. hoses.
Pier No. 2 for vessels up to 12.50 m. draft. Four 12 in. hoses.
Pier No. 3 for vessels up to 13.00 m. draft. Four 12 in. hoses.
Maximum pressure allowed 3 kgs.
Loading rates up to 4,000 t.ph.

BALLAST: All dirty ballast to be discharged ashore; 2 hoses available at each berth, can receive ballast up to 2,000 t.p.h.

Vessels berthed at Piers No. 2 and 3 cannot discharge ballast simultaneously.

Clean ballast may be discharged to sea, only if vessel is in gas-free condition.

Thick slop residues may only be accepted subject to terminal operator's approval, but only in quantities of less than 100 tons.

FRESH WATER: Available at berths No. 2 and 3 only, subject to 24 hours' notice. Loading rate about 15 t.p.h.

FUEL: Available at all Sonatrach berths, subject prior arrangements. No barges.

REPAIRS: Very limited facilities. No dry docks. No possibility for radio/radar repairs.

No repairs may be carried out on board a tanker without first obtaining the Harbour Master's permission.

FIRE PRECAUTIONS: Anchors must be hove-up while vessel is moored in berth. A fire wire must be provided fore and aft for tug's use if necessary.

Tanker's fire-fighting equipment must be ready for use on fore and main deck.

3 tugs are equipped with fire-fighting apparatus.

DENSITY: 1025.

WATCHMEN: Not compulsory but recommended. The Port Commandant may impose a guard on vessels carrying certain cargoes.

CUSTOMS ALLOWANCES: 3 packets cigarettes and 1 bottle of wine or alcohol per man per day.

CONSULS: France: tel. 92.12.13. Others at Algiers.

REPATRIATIONS: Can be arranged via Algiers.

AIRPORT: Dar-el-Beida International Airport at Algiers, 240 km. from Bejaia.

TIME: GMT plus 1 hour (Winter). GMT plus 2 hours (May-October).

POLICE/FIRE/AMBULANCE: Police, tel. 92.04.22. Ambulance/Fire, tel. 92.00.02.

TELEPHONES: None on board, but telephone exists at each tanker berth.

SHORE LEAVE: Allowed, provided seamen carry identity cards or shore passes.

AUTHORITY: Capitainerie du Port de Bejaia.

MOSTAGANEM: 35.56 N. 00.04 E.

(SHIPMASTER'S REPORT)

DOCUMENTS:

7 Crew Lists.
1 Passenger List.
1 Helath Declaration.
1 Vaccination List.
2 Store Lists, including Bonded Stores.
2 Crew Personal Effects Lists.
2 Lists of Arms and Ammunitions.
1 List of Currencies.

If the vessel is coming from another Algerian port, clearance will also be required.

Certificates: Not requested.

Customs: Very strict customs at this port. Routine search will be made. Penalties extremely high if something not manifested is found.

PILOTAGE: Compulsory. There are two Pilots; 24 hour service. Pilot boat is black with a white stripe. Vessels arriving after sunset, if no cargo work at night, will be kept in the roads until 0600 hrs. next morning. Vessels sail at any time during the night.

ANCHORAGE: Recommended anchorage is having the light of the Jette du Large and the Light of the Mole Sud Ouest in line, and 0.5 miles off the first light.

MAX. SIZE: Not more than 200 m. length. Max. draft 25 to 27 ft., depending on the berth.

HEALTH: Free pratique is granted easily upon berthing and producing Health Declaration and Vaccination List. If any vaccinations certificates have expired, free pratique will be granted and health Authorities will arrange, on request, the vaccinations.

RADIO: Alger Radio, receiving on 2182 kc/s. and working on 1792 kc/s., on 24 hours basis. Also Oran Radio, listening on 2182 kc/s., and working on 1735 kc/s., on 24 hours service. Advisable to use the latter.

VHF: At the harbour master's Office, working on Channel 16, officially 24 hour service, only French spoken. Also Oran Radio can be reached easily by VHF Channel 16, from Mostaganem, English spoken.

TUGS: Available at Arzew. Therefore too expensive to be used.

BERTHING: Eight berths available.

CRANES: Five cranes, (6–15 tons).

STEVEDORES: Arranged by the Agent. They belong to the Societe Nationale de Manutention (State Stevedoring Company), who supplies them.

MEDICAL: All facilities available.

DENSITY: 1025.

FRESH WATER: Available, but not advisable to use as drinking water.

FUEL: No facilities. Vessels must proceed to Oran for bunkering.

GANGWAY/DECK WATCHMEN: Not compulsory, but strongly recommended by Port Authorities and Agent.

OPENING/CLOSING HATCHES: Can be performed by ship's crew or by stevedores.

CUSTOMS ALLOWANCES: 1 bottle of spirits and 1 carton of cigarettes are allowed for every Crew member. Anything in excess of this amount will be sealed.

IDENTIFICATION CARDS: On leaving the vessel, Crew members to carry their passports, which will be kept at the harbour gate, whilst ashore.

CONSULS: None.

REPATRIATION: It is possible and easily arranged by Agent.

REPAIRS: Only minor repairs can be carried out by workshop.

AIRPORT: At Oran, La Seine Airport, 80 km. distance, with 3 daily domestic flights to Algiers.

TIME: GMT all year round.

HOLIDAYS: See "Algiers".

SHORE LEAVE: No restrictions, except for some nationals.

AUTHORITY: Capitanerie du Port de Mostaganem.

ORAN: 35.43 N. 00.39 W.

DOCUMENTS: Refer to Algiers.

PILOTAGE: Compulsory. Arranged by Agents' basis vessels ETA. International Code signals used. Pilot boards at port entrance.

ANCHORAGE: In depths over 40 ft. available in the roads.

HEALTH: Free pratique given by Brigade Maritime on arrival, unless suspected disease on board when port doctor will visit the ship. Pratique is automatic after calling at another Algerian Port.

RADIO: Alger Radio.

MAX. SIZE: Length 800 ft. Draft 38 ft.

TUGS: Available to assist berthing and unberthing.

BERTHING: Mole 1: tankers, depth alongside 39 ft. Mole 2: tankers, depth alongside 33 ft. Cargo vessels: about twenty berths at quays with depths from 20 to 33 ft. alongside.

MEDICAL: Doctors and hospital facilities available.

FRESH WATER: Available by barge.

FUEL: All grades available by pipe-line at the oil berths.

REPAIRS: Only minor repairs can be effected.

WATCHMEN: Not compulsory but recommended. The Port Commandant may impose a guard on vessels carrying certain cargoes.

CUSTOMS ALLOWANCES: Three packets cigarettes and one bottle of wine or alcohol per man per day.

TIME: GMT plus 1 hour (Winter). GMT plus 2 hours (May-October).

AIRPORT: La Senia, 7 km. away. Daily flights to Algiers for international connections.

AUTHORITY: Port d'Oran.

SKIKDA: 36.53 N. 6.54 E.

DOCUMENTS: Refer to Algiers.

PILOTAGE: Compulsory.

RESTRICTIONS: Mooring and unmooring permitted at night.

If vessel required to swing inside harbour, turning basin is 350 m. diameter provided draft not more than 11 m.

MAX. SIZE: Tankers up to 50,000 d.w.t. acceptable at No. 3 berth.

TUGS: Tug assistance available for berthing and unberthing.

TANKERS: Three berths,

No. 1 – for vessels up to 225 m. length, 11.00 m. draft.
No. 2 – for vessels up to 250 m. length, 12.50 m. draft.
No. 3 – for vessels up to 275 m. length, 27.50 m. draft. ?

Three shore lines, each with capacity of 500 cu.m. per hour.

Three slop tanks available each with capacity of 500 cu.m. Dirty ballast discharge rate restricted to 2,000 cu.m. an hour.

FRESH WATER: Available by pipe-line at the berths.

FUEL: Not available.

NOTES

Please also advise Shipping Guides Ltd.

Angola

CABINDA: 05.22 S. 12.11 E.

DOCUMENTS:

10 Manifests for each port where cargo loaded for Cabinda, plus 1 copy of each Bill of Lading.
8 Lists of Passengers disembarking or in transit, even if nil.
8 Crew Lists.
8 Lists giving previous Ports of Call.
2 Lists of Crew Vaccinations.
3 Stores Lists.
3 Personal Effects Lists.

Other forms applicable to customs, health, etc., can be completed on arrival.

PILOTAGE: Services of a Government Pilot are compulsory. Radio ETA to Agents via Luanda Radio (or by cable from previous port) and anchor on arrival as near Cabinda as draft permits. Vessel is visited by port authorities and, if necessary, will be shifted, with Pilot, to alternative anchorage. If cargo for account of Cabinda Gulf Oil, vessel will almost certainly be moved nearer Malongo, where oil companies have special jetty for discharge of their dry cargo exlighters.

Tankers: The Pilot Boarding Area for Cabinda is one mile Southwestward of Well 84-8 (located 5° 26′ 06.7″ S. 12° 03′ 13.4″ E.) where a Cabinda Gulf Mooring Master will board the vessel. On establishing contact by R/T or VHF, the Mooring Master will advise the vessel of a safe approach; briefly, this will be for the vessel to approach from Westerly direction and to keep West of all obstructions, e.g. drilling rigs, platforms, etc.

As offshore drilling and surveying operations are being effected on a continuous basis. Masters are warned to approach the port with great caution. Cabinda Gulf Oil Terminal (call sign "Malongo Terminal") will pass on to vessels upon arrival the latest information regarding oil-drilling rigs, platforms, etc., once contact by VHF has been established.

Special attention is called to the well platforms:

No. 84–1: Located 5° 25′ 19.9″ S. 12° 03′ 59.5″ E.
No. 84–12: Located 5° 29′ 10.2″ S. 12° 03′ 52.1″ E.
No. 84–8: Located 5° 26′ 06.7″ S. 12° 03′ 13.4″ E.
No. 95–3: Located 5° 33′ 45.4″ S. 11° 59′ 05.9″ E.

These platforms are equipped with both light and horn. The lights flash Morse Code "U" as follows:

Light: Group flash (3) 15 seconds.
Light: 0.4 seconds; Eclipse: 0.5 seconds.
Light: 0.4 seconds; Eclipse: 0.5 seconds.
Light: 1.2 seconds; Eclipse: 12.0 seconds.

ANCHORAGE: For vessels moving to Malongo, anchorage is restricted where Cabinda Gulf Oil are operating, roughly between 5° 15′ S. and 5° 30′ S. extending out to 12° 00′ E.

Tankers: Vessels required to anchor upon arrival (e.g. if the SPM Buoy is occupied) should anchor in the Pilot Boarding Area, at a distance of not less than 3.5 miles Westward of the SPM Buoy.

MAX. SIZE: Cargo vessels at anchorage for safe working off Cabinda 32 ft. draft. Vessels with deeper drafts can be accommodated further out but is always risk of swell hampering operations. For tankers Cabinda Gulf have buoyed terminal for tankers maximum 100,000 tons, max. draft 50 ft.

PRATIQUE: Upon arrival, the appropriate Government Officials will board the vessel for prompt clearance so the preparation can begin for mooring.

In the event of arrival during night, clearance will not be effected until 0800 hrs.; however, a Custom Police Agent will be stationed aboard the vessel, which will allow preparation for daylight mooring to proceed.

RADIO: Luanda Radio. HF Radio telephone system is installed at Malongo Terminal and uses the call "MALONGO". 24 hour watch is maintained on the international frequency of 2182 kHz.

For short range communications of approximately 50 miles, a VHF system is also installed in Malongo, which uses the same radio call ("MALONGO") and is also monitored 24 hours a day. Initial contact on this system should be made on 156.8 Mc/s. (Channel 16) then, by mutual agreement, the traffic should be passed on any of the following frequencies: 156.6 Mc/s. (Channel 12); 165.45 Mc/s. (Channel 9); 156.7 Mc/s. (Channel 14).

Masters are requested to advise CABGOC-CABINDA 72 and 24 hours in advance of estimated arrival time, giving vessel's name, date and expected hour of arrival, Master's name and any special requirements.

TUGS: None normally required. Cabinda Gulf have chartered a small tug to assist tankers berthing, if necessary.

STEVEDORES: 48 hours advance notice, giving hatch distribution and nature of cargo, is recommended.

MEDICAL: Arrangements can be made for doctor to visit vessel on arrival. Hospital facilities available. Serious cases are taken to Luanda. Crew must be in possession of valid Smallpox and Yellow Fever Certificates.

SINGLE BUOY MOORING: A single point buoy mooring is located 8.7 miles West-Southwest of the Cabinda Gulf Oil Company Terminal at Malongo. The position of the buoy mooring is approx. 5° 26′ S., and 12° 05′ E. The buoy is marked by a 5-mile white light flashing for 2 seconds and eclipsed for 18 seconds. Depth of water in the berth is 75 ft.

Mooring: Mooring and unmooring operations will be undertaken by day and night under normal weather conditions.

Notice of Readiness will be accepted by the Mooring Master on arrival providing that the ship is in all respects ready to load.

Before arrival at the Pilot Boarding Area it will be necessary to ensure that the following moorings are ready for use on arrival at the berth:

Minimum requirements on forecastle head: 4 mooring ropes; 1 heavy messenger (5 in.); 1 pick-up wire (0.75 in. diameter) with shackle on the eye.

When the vessel is within reasonable distance of the buoy, two ship's lines will be carried by the mooring launch to the buoy. These will be used to heave the vessel into position when she can pick up the two plaited buoy ropes. Once the buoy ropes are secured, the ship's own lines will be slacked down until such time as all the weight is taken by the buoy ropes; the ship's lines can then be left slacked right down but attached to the buoy ropes in case of emergency.

Power must be available at all times on all deck winches and windlass while the vessel is at the berth.

There are no special arrangements for unmooring, which can be undertaken by day or night.

Hose Handling: Two 12 in. hoses are connected to ship's manifold on the port side. Hose handling is to be effected by ship's crew under the direction of a ship's officer as instructed by the Mooring Master. The port boom should be rigged in readiness with a runner of minimum of 0.75 in. diameter. Approx. weight of one hose is 3 tons.

Ballast: No facilities for reception of dirty ballast. Vessels must arrive with clean ballast sufficient for safe manoeuvring. Deballasting operations will be constantly policed by representatives of CABGOC, and any evidence of pollution will be cause for refusal to permit continuing deballasting.

Cargo: "Cabinda Crude Oil" will have varying gravities ranging from 26.3 API to 34.6 API.

Some of this oil contains appreciable amounts of hydrogen sulphide, which can cause a toxic atmosphere during loading.

Loading: Cargo loading is by gravity, possibly assisted by booster pump, at a rate of approximately 30,000 Bbls. per hour.

About 30 minutes before the cargo is completed, the CABGOC Representative should be advised in order to co-ordinate the shutdown between the vessel and the terminal.

When the vessel has completed the cargo, loading line valves ashore and on the buoy will be closed; only then may the vessel's manifold valves be closed. (In an emergency, however, vessel may shutdown against loading.)

After completion of loading operations, the vessel will be ullaged and a comparison of ship-shore figures made. The ullages will be transmitted to the terminal by radio, and the report prepared and distributed.

The cargo papers will be delivered to the Master by the CABGOC Representative as promptly as possible.

Tankers may have to be "short despatched" to avoid delays on sailing.

There is no provision for off-take from ship. It is imperative that Ship's Master declare the tonnage he requires prior to loading. Accurate meters ashore will ensure requested tonnage.

DENSITY: 1025. Influence of Congo River current variable depending on season.

FRESH WATER: One lighter available for carrying about 40 tons water but no guarantee can be given. Cost of water is expensive.

FUEL: None available.

WATCHMEN: Not necessary. Harbour Police placed aboard by Authorities.

OPENING/CLOSING HATCHES: By crew or stevedores.

CERTIFICATES: Ship's Register, valid Deratisation Certificate and Safety Equipment Certificate.

CUSTOMS ALLOWANCES: Customs do not normally seal bond and *reasonable* amount tobacco may be taken ashore for crew members *own* consumption. No liquor restrictions on board but not allowed ashore under any circumstances.

IDENTITY CARDS: Supplied by Agent and stamped by Immigration Police before any person allowed ashore.

CONSULS: None.

REPAIRS: Facilities very limited.

REPATRIATION: Available if absolutely necessary but can only be arranged via Luanda.

AIRPORT: Small airport about 4 miles from city served by internal airline only. One flight from and to Luanda per day.

TIME: GMT plus 1 hour.

HOLIDAYS: 1st January; 28th May; 10th June; 15th August; 5th October; 1st November; 1st December; 8th December; 25th December. Work not possible 1st January and 25th December, but possible other dates subject to approval Port Authority.

EMERGENCY TELEPHONES: Police 22456; Ambulance 22405; Fire, telephone Port Captain 22160/22159.

SERVICES: None available.

SHORE LEAVE: Travel from Cabinda District to Angola proper is both limited and strictly controlled and, therefore, visits ashore of vessel's personnel should be minimised.

Crew members left behind when the vessel leaves will be held in custody and deported at the vessel's expense. The vessel may also be subjected to a fine.

WEATHER: Wind and swell are mostly from S.W. direction with usually a heavy swell from March through to September. Heavy rains may be expected from December through to April. The prevailing currents set N.W. and at times exceed 3 knots. In view of these conditions, vessels are advised that under no circumstances

are engine repairs or immobilisation of the main engines permitted within port limits.
DELAYS: For tankers usually no delay, but for cargo vessels may be delays if two or more arrive simultaneously, which will result in lighter shortages. Is also probability of swell hampering discharge/loading.
AUTHORITY: Inspeccao da Exploracao dos Portos do Norte.

LOBITO: 12.20 S. 13.34 E.

DOCUMENTS: Required on arrival:
Health Certificate.
2 Vaccination Certificates (smallpox, cholera and yellow fever).
8 Crew Lists.
11 Passenger Lists (each for Landing and Transit).
4 Lists showing Ports of Call.
2 Lists of Articles held by Crew: cameras, binoculars, radio, spirits, cigarettes, etc.
3 Ship's Stores Lists.
6 Dangerous Cargo Lists.
8 Unfreighted Cargo Manifests.
1 Freighted Manifest.
3 Non-negotiable copies Bills of Lading.
3 Cargo Plans (preferably before ship's arrival).
Other necessary official forms prepared by Agent.
PILOTAGE: When Pilot required outside Harbour Entrance, vessel must request via Agent at least 12 hours before arrival. Otherwise Pilot boards inside Lobito Bay before vessel berths. Pilot boat: grey hull, white housing. Max. speed entering Bay – 8 knots.
ANCHORAGE: Lobito Bay excellent holding ground, depths over 33 ft. and easily accessible day and night the year round.
ENTRY RESTRICTIONS: No restrictions, vessels may enter harbour day and night. Vessels not normally visited by Port Authorities between approximately 1900 hrs. to 0700 hrs.
MAX. SIZE: Length 900 ft., draft 34 ft., max. depth 35–37 ft. (normal tidal range: 3 ft. 3 in., maximum: 6 ft.).
WEATHER: March/May rain season. Heavy wind and rain can effect cargo work.
HEALTH: Pratique never given by radio, but granted after Port Authorities (including Doctor) board vessel between 0700–1900 hrs. Pratique granted if no contagious illnesses aboard, otherwise quarantine restrictions imposed. Ships calling from other Angolan Ports – except coasters – subject same procedure.
RADIO: Because Lobito Radio (call sign CQZ) operating MW range 200/400 miles only, all ETA messages, etc., must be routed via Luanda Radio (call sign CQW). Agent uses same routeing.
TUGS: Tug (usually one only) joins vessel whilst berthing and sailing. Ships' lines used.
BERTHING: Unless Masters indicate preference, Port decides which side alongside. No vessels usually allowed berth after sunset. Sailing after dark allowed at Port Authorities' discretion, up to 2400 hrs. No vessel permitted berth without Pilot. Before berthing, vessel must effectively cover water outlets, prepare accommodation ladder and have anchors "at the ready". (Authority fine any vessel ejecting water or waste on to Quays.) Ships carrying explosives not permitted berth before Port Captain inspects cargo.

Passenger and Fruit vessels are given priority regarding berthing.
STEVEDORES: Important vessel gives accurate ETA at least 24 hours in advance to enable Agent order necessary gangs. (Gangs ordered 0700 and 1500 hrs.) No work usually allowed Sundays.
MEDICAL: Radio before arrival if medical assistance necessary on entry. Good hospital facilities available, but specialised treatment and surgery is not. Yellow Fever, Cholera and Smallpox Vaccinations Certificates inspected on arrival.
TANKERS: No oil to be pumped overboard into Territorial waters. Heavy fines imposed for oil pollution, however slight. Three 8 in. diameter pipe-lines discharging into local storage tanks. No slop tanks available. Two Tanker Berths, Nos. 5 and 8, maximum drafts 30 ft. and 35 ft. respectively.
DENSITY: 1024.
FRESH WATER: Normal requirements readily available and delivered by 3 in hose. Loading rate very slow as pressure usually low. Costs: First 50 cu.m., Esc. 20.00, then gradual reduction to Esc. 7.50 for 1,500 cu.m.
FUEL: Fuel Oil (Ordinary) available, viscosity up to 1500 sec. Redwood. 24 hours' notice bunker requirements essential. Gas oil available. No Diesel.
GANGWAY/DECK WATCHMEN: Compulsory, both day and night.
OPENING/CLOSING HATCHES: When closed or opened by Stevedores, cost per time, Esc. 100.00 per hatch. (Crew allowed to carry out this operation.)
SHIPS' CERTIFICATES: Registered Tonnage Certificate, Deratisation Certificate to be shown. (Vessels of Communist countries advised to carry all relevant Certificates for vessels' tonnages, measurements, gear and crew.)
CUSTOMS ALLOWANCES: No restrictions. Custom's Guard supervises opening and resealing of bond.
CARGO GEAR: Normal routine gear: wire and rope slings, nets, chain-slings, baskets, grabs, and shore-cranes (capacity 3–10 tons) available. Heavy lifts of over 10 tons must be discharged using ship's derricks. Two cranes 10 tons available, but not always accessible. 100 ton floating crane sometimes available.
CREW IDENTIFICATION CARDS: On arrival, all crews' and passengers' passports must be handed Immigration Police, who retain these and issue shore-passes. Passes must be carried at all times when on shore. If lost, a fine of Esc. 1150.00 per Pass is imposed.
CONSULS: At Lobito, Norwegian and Belgian Consulates and French Consular Agency. At Benguela – 30 km. from Lobito – Italian Vice-Consulate.
REPAIRS: Small, slipway accommodating vessels up to 800 tons available. Limited engine and hull repairs: electric, oxy-acetylene welding, riveting, cleaning, repairs to auxiliary diesel and electric equipment and boilers. Floating dock for vessels up to 2,000 tons displacement.
REPATRIATION: Air communication via Luanda.
AIRPORT: About 4 kilometres from Port. Airstrip unable take heavy aircraft.
TIME: GMT plus one hour.
HOLIDAYS: 1st January; March/April Easter; 10th June (National); May/June (Corpus Christi); 15th August (Ascension Day); 2nd September (City Day); 5th October; 1st November (All Saints Day); 1st December (Independence Day); 8th December; 24th December; 25th December.
GENERAL: Ships should not: Dispose any wastes into harbour or on to quays. Change mooring lines or lower lifeboats or immobilise main engine or use ship's sirens or radio station without prior permission from Authorities. Vessels must: use watchmen 24 hours per day on adequately illuminated gangway. Also hoist Portuguese Flag from 8 a.m. to sunset.
SHORE-LEAVE: Nationals from countries having friendly diplomatic relations with Portugal usually granted shore-leave. See "I.D. Cards".
DELAYS: Congestion not unusual and berthing delays may vary from one to three days. Ships calling for bunkers have no priority but are sometimes berthed at sunset and fuel during night-shift. Discharging of bulk cargoes can be effected by shortage of suitable wagons.
AUTHORITY: Port Manager, Port of Lobito.

LUANDA: 08.48 S. 13.14 E.

PORT LIMITS: A vessel to be considered an "arrived ship" should be anchored in the bay past a line drawn between the Ilha Light and across the bay to Fort S. Pedro.
DOCUMENTS:
6 Luanda Cargo Manifests (1 freighted).
3 Luanda Bills of Lading.
8 Transit Cargo Manifests.
5 Transit Bills of Lading.
6 Crew Lists.
1 Crew List with full Christian names, giving dates of smallpox and yellow fever inoculations,
7 Ports of Call List.
7 Passenger Lists, including landing and intransit passengers, or "No passengers" declaration.
2 Provisions and Stores Lists.
1 Crew Personal Effects Manifest.
1 Health Declaration.
All ship's certificates to be sighted by Authorities.
PILOTAGE: 72 hours notice of arrival, addressed Agents via Luanda Radio, plus message of arrival at least 6 hours prior arrival received during working hours (0700–1700 hrs.). No VHF available. Pilot launch comes out from port. Anchorage for Pilot in Luanda Bay. No draft restriction at anchorage. Pilot not required for anchoring in bay. For berthing, no pilotage available between midnight–0700 hrs. Pilotage compulsory. No special berthing Pilot. Pilot launch white – flying Pilot Flag (H).
ANCHORAGES: Luanda Bay offers safe, sheltered anchorage at all times of the year. Good holding ground – sand/mud. No draft restrictions.
MAX. SIZE: Length, 1,000 ft. (alongside); breadth, no restriction; draft, 34 ft. (alongside). Tankers, up to 55 ft. draft at the refinery buoys.
WEATHER: March/May rain season. Heavy wind and rain can affect cargo work.
HEALTH: Pratique may be granted by radio through Radio Luanda, addressed Port Health or via Agents. Accommodation ladder must be rigged for doctor on arrival. Pratique must be granted at each Angolan port. Pratique is *not* automatic. If infectious disease on board inform Port Health/Agents by cable.
RADIO: Addressed "Luandaradio" for ETA, draft and requirements. Call sign CQW on 500 kc/s, listening on "odd" hours only throughout 24 hours. Listening between 0600–1800 hrs. Call sign CQW3 on 13.023 kc/s on "even" hours only. Listening between 1800–0600 hrs. Call sign CQW on 8.565 kc/s on "even" hours only.
TUGS: Two available and compulsory for berthing and unberthing. Tugs join vessel off berths. Ship lines used (if tug lines requested – extra charges).
BERTHING: Ships taken in strict rotation of arrival for berthing, except that passenger vessels have priority. There are 7 berths for import and export cargoes, all berths are available for oil bunkering.

The quays are divided into 5 zones with depths alongside of 32 ft. maximum.

Zone I.	1,380 ft. of which 900 ft. of quay length suitable for ocean going vessels.
Zone II.	480 ft. quay length.
Zone III.	900 ft. quay length.
Zone IV.	540 ft. quay length.
Zone V.	574 ft. quay length.

Shoreside cranes of 3 tons and 5 tons, furthermore 2 cranes of 10 tons lifting capacity and also 1 mobile crane of 20 ton capacity for lifting heavy pieces only.

A self-propelled floating crane, capable of lifting 100 tons, was recently commissioned – maximum and minimum reach of 46 ft. 6 in. and 9 ft. respectively, lifting to about 78 ft. approximately.

BULK HANDLING: Ores in bulk are usually loaded at Zone III; no mechanical loading installation.

The ore is shovelled from railway trucks into buckets; daily loading average 4,000 tons per 24 hrs.

Grain vessels will also be moored at Zone III alongside the grain shed. Discharging by means of tubes which are lowered into the holds and suck the grain out by an electrically propelled spiral fitted in the tube.

The rate of discharging is about 100 t.p.h. and the grain is loaded into railway waggons, each of 30 ton capacity, via the adjacent warehouse.

STEVEDORES: Gangs arranged by Agent/Shipmaster. Normal port working hours 0700–1200 hrs., 1400–1730 hrs. (overtime 1730–2330 hrs.), Saturday 0700–1230 hrs. Sunday/holidays – no work.

MEDICAL: For serious cases, as much advanced notice as possible should be given with all details available. Minor cases can be treated on arrival within half an hour without previous notice. Apart from Government Hospital, there are a number of private nursing homes with good facilities. Smallpox inoculations are essential. Yellow Fever inoculations recommended.

TANKERS: Two tanker terminals No. 2 Quay and off-shore terminal. Lines No. 2 Quay 10 in. diameter, available for loading/discharging fuel oils, gas oil, gasoline and aviation spirit, but *not* crude oil. Off-shore terminal utilised principally for loading fuel oil and gas oil, as well as loading or discharging crude oil. Three lines, viz. 12 and 18 in. – fuel oil and crude oil, 8 in. for gas oil. No slop discharge facilities. Drafts – No. 2 Quay 34 ft. Off-shore terminal two sets mooring buoys, one for tankers with max. length 230 m. and max. draft 55 ft. and the other for tankers not exceeding 100 m. with draft 40 ft.

DENSITY: About 1024.

FRESH WATER: Fresh water available through quay pipe-lines, each hose delivering about 30 t.p.h. First 50 tons Escudos 20 per ton, next 200 tons Escudos 17.50 per ton, next 250 tons Escudos 15 per ton.

FUEL: Limited number of grades can be obtained subject to nomination well in advance. No barges available.

FIRE PRECAUTIONS: For tankers loading/discharging alongside No. 2 Quay – no vehicles allowed within vicinity and other vessels cannot berth within 40 m. of tanker's stern or bow.

DEVELOPMENTS: Plans for reclamation and new berths round to the Forte da S. Pedro da Barra.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Can be carried out by crew or stevedores at vessel's option.

SHIP CERTIFICATES: Tonnage and Deratisation Certificates.

CUSTOMS ALLOWANCE: No restrictions, but sales ashore a serious offence.

CARGO GEAR: No additional requirements provided valid test certificates aboard.

CREW IDENTIFICATION CARDS: Provided by Agents for crew proceeding ashore.

CONSULS:

Belgium
France
Great Britain
Italy
South Africa
U.S.A.
Austria
Brazil
Denmark
West Germany
Netherlands
Norway
Sweden
Switzerland
Spain

REPAIRS: Minor repairs and hull repairs above the water-line can be carried out.

DRY DOCKS: None.

REPATRIATION: Repatriation will not present any difficulties.

AIRPORT: Distance from port 4.5 miles. 21 flights weekly to/from Lisbon by Transportes Aereos Portugueses (TAP), also 5 flights weekly to/from Salisbury and Johannesburg in association with South African Airways (SAA).

TIME: GMT plus 1 hour all year.

HOLIDAYS: Saints Day (1st January), Portugal Day (10th June), Saints Day (15th August), Republic Day (5th Ocober), Saints Day (1st November), Independence Day (1st December), Saints Day (8th December), Christmas Day (25th December). No cargo work on these holidays.

POLICE/AMBULANCE/FIRE: Police 7408; Ambulance 25275; Fire 22222.

TELEPHONES: Can be placed on board.

GENERAL: Ample water in bay for anchoring, and most vessels enter port without Pilot. Pilotage is compulsory for berthing/unberthing on quays, this service being available from 0700 hrs. to midnight. If Master elects to wait for Pilot outside port and another vessel proceeds direct to anchorage, the latter will be first on turn for berth.

SERVICES: Tank cleaning possible but advance notice required. Radio, radar repairs possible by military personnel, but spares rarely available.

SHORE LEAVE: Crew members allowed shore leave subject Immigration approval provided inoculation certificates are valid.

REGULATIONS: Portuguese mailboats have berthing priority over all other vessels, foreign *passenger* vessels next in precedence.

DELAYS: Congestion rarely exceeds 36 hours.

AUTHORITY: Servicos de Portos, Caminhos de Ferro, e Transportes.

MOCAMEDES (incl. Porto Saco): 15.11 S. 12.07 E. (See Plan Book)

DOCUMENTS:

Health Certificate.
2 Vaccination Lists (smallpox and yellow fever).
8 Crew Lists.
11 Passenger Lists (for each landing and transit).
4 Lists showing ports of call.
2 Lists of Articles held by crew/passengers, i.e. cameras, binoculars, radios, tobacco, etc.
3 Ships' Stores Lists.
6 Dangerous Cargo Lists, i.e. all types of explosives.
All foregoing to be signed by Master. Other essential official forms prepared by Agent.

PILOTAGE: Pilot boards in Bay – safe, natural bay with no reefs and easily accessible both day and night. Vessel *must* wait for Pilot and instructions before berthing.

ANCHORAGE: No currents in harbour area, but slight prevailing winds constant. Good holding ground with depths over 34 ft. Approaches up to 45 ft. depth. Tidal range about 5 ft.

RESTRICTIONS: No restrictions; vessels may enter harbour day and night. Authorities visit between 0700 and 1900 hrs. (approx.) only. Vessels may sail at any time.

MAX. SIZE: *Mocamedes* – Governed by berth depth 33 ft. alongside. *Porto Saco* – Vessels up to 14 m. draft. Largest bulk carriers handled.

HEALTH: Pratique granted on arrival after "Health Guard" visit: boarding 0700-1900 hrs. Normal quarantine restrictions imposed if contagious diseases aboard. Ships calling from other Angolan ports (except coasters) are subject same procedure.

RADIO: Messages *must* be routed via Luanda Radio (call sign CQW). No ship/shore radio link.

TUGS: Two available of 2,200 h.p., fitted with VHF. Join vessel for berthing. Ship's lines used. Vessel under 5,000 tons use 1 tug only.

CARGO FACILITIES: *Mocamedes* – The accommodation consists of 1 concrete quay, length 1,350 ft. providing 3 berths. For the handling of general cargo, there are 4 cranes of 5 tons and 2 cranes of 3 tons, modern cargo handling devices. Also lightening possible. One 10-ton floating crane available, subject ample notice from Lobito. Dangerous cargo is discharged alongside or into lighters, at the Port Captain's discretion.

Porto Saco (Saco Bay) – Ore is loaded at the pier in Porto Saco; length is 1,066 ft., width 59 ft. Depth alongside 54 ft. 6 in. at low tide, normal sea water, clear height from water level at ISHW up to unloader 73 ft. 10 in. One mechanical loader of conveyor belt type; capacity often exceeds 3,500 metric t.p.h. Reach 65 ft. 6 in. approx. from fenders. Connections for supply of bunkers and water.

BERTHING: Unless Masters indicate preference, port decides berthing-side. No vessels berthed after sunset (except passenger ships), but sailing during nightshift permitted so long as prior warning given before 1700 hrs. No vessel allowed berth without Pilot. Before berthing, important that vessel covers all water outlets, prepares accommodation ladder and has forward anchors ready. Ships carrying explosives not permitted berth before Port Captain surveys cargo.

STEVEDORES: Radio accurate ETA 24 hours in advance to enable Agent order required gangs. (Gangs ordered 0700 and 1500 hrs.) No Sunday work permitted for cargo vessels.

MEDICAL: If medical assistance required on arrival radio to Agent. Adequate hospital facilities available, but no specialised treatment or surgery. Yellow fever/smallpox certificates inspected on arrival.

TANKERS: No oil or waste products to be pumped overboard. Heavy fines imposed for breach of this regulation. Tankers discharge at Porto Saco – about 10 km. North of general cargo berths, situated Northern end of Mocamedes Bay. Maximum draft 54 ft., length of quay 1,066 ft. No dirty ballast facilities.

DENSITY: 1024.

FUEL: Available from dockside pipe-line. At Porto Saco, rate 200 t.p.h. Bunkers may be taken during loading operations without delay.

FRESH WATER: Available ex-wharf, rate 15 t.p.h.

FIRE PRECAUTIONS: No special precautions except ships carrying explosives. Fire Brigade standby charge.

DEVELOPMENTS: Porto Saco (Iron-ore/Tankerberth) anticipated augment present ore-loading equipment to enable load ore-carriers up to 10,000 t.p.h. Dredging to projected depth of 65 ft.

GANGWAY/DECK WATCHMEN: Compulsory, day and night.

OPENING/CLOSING HATCHES: When performed by stevedores, costs per hatch per time Esc. 100.00, but crew allowed perform this task.

SHIPS' CERTIFICATES: Registered Tonnage Certificate, Derat. Certificate, examined by authorities on arrival.

CUSTOMS ALLOWANCE: No restrictions. Customs' guard supervises opening and resealing of ships' bonded lockers.

CREW IDENTIFICATION CARDS: All crew/passenger passports handed Immigration Police who issue shore passes. Passes must be carried when on shore.

CONSULS: None.

REPAIRS: Only very minor voyage repairs.

DRY DOCKS: None.

REPATRIATION: Air communication via Lobito and Luanda.

AIRPORT: Small airstrip unable to take heavy aircraft.

TIME: GMT plus 1 hour.

HOLIDAYS: See "Lobito".

GENERAL: Ships must not dispose of wastes into harbour or on to quays, change mooring lines, lower lifeboats, immobilise main engine, use ship's siren, or ship's radio station without prior permission from authorities. Vessels must use watchmen for 24 hours per day on well-illuminated gangways and hoist Angola flag from 0800 to sunset.

SERVICES: None available.

SHORE-LEAVE: All nationalities from countries having friendly diplomatic relations with permitted shore leave. See "I.D. Cards".

DELAYS: Berthing delays are unusual.

NOTES

Please also advise Shipping Guides Ltd.

Argentina

Information for ports of Argentina, including drawings of port areas as reproduced in our plan section, has been compiled not only with the assistance of Port Authorities but also with the very kind cooperation of Centro de Navegacion Transatlantica of Buenos Aires to whom we are very much indebted.

Shipowners and Masters wishing to be in possession of more detailed information concerning River Plate ports, Argentina South Atlantic ports and the Strait of Magellan, are advised to obtain a copy of the "C.N.T. Year Book" which is published by Centro de Navegacion Transatlantica, 25 de Mayo 489, Buenos Aires.

N.B. For practical purposes, we have sub-divided information for Argentina into three sections as follows:

I. *GENERAL* (see page 8).
II. *RIVER PLATE PORTS* (see page 13).
III. *SOUTH ATLANTIC PORTS* (see page 25).

I *GENERAL*

DOCUMENTS:

(a) According to Migrations Resolution No. 9153 of 13.7.72, effective 1.11.72, issued to comply with Latin American Free Trade Zone agreements tending to uniformity of shipping documents through Latin America, a new form has been introduced, and others modified.

Distribution of forms is now as follows:

	Sanitary Officials	*Customs*	*Immigration*	*Port Police (Prefecture)*	*Total*
Sailing permit from last port				1	1
Health Declaration	1				1
General Declaration†			1†		1
Negative cargo list (if no cargo for the port) alternatively Ballast certificate, alternatively cargo manifest for the port.		1			1
Manifest of cargo for transshipment		1			1
Store List					
Deck, Engineering & Refrigerating		2			2
Cabin Stores		2			2
Crew Personal Effects		2			2
Passenger List†	1	2	1	3/5	7‡
Passenger Baggage summary (manifest)		2			2
Crew List†	1		2	3/4	6§
Crew Identity cards†			1 each		various
Passenger E/D cards†			1 each		various

†required on both entering and sailing.
‡ 9 for passenger ship.
§ 7 for passenger ship.

(b) Masters should also have at hand for inspection as required all the various certificates such as Certificate of Registry, Postal packet permit, if pertinent, Freeboard, Measurement, Safety Equipment, Radio Installation, Bulk Cargo, shifting board installations or equivalent, and Deratisation Certificate, or exemption.

None of these documents requires an Argentine Consular visa.

(c) Port Agents should also receive copies for their use and to facilitate any further contacts with the authorities in case of need. In particular they require a large number of copies of Manifest, and from this they will prepare Spanish manifest, which must be presented to Customs within 48 hours of vessel's entry. A number of extra copies of crew list are also needed, and one extra store list.

(d) Every person figuring on the crew list of a vessel entering an Argentine port must possess documents proving his identity, such as a discharge book, passport or other documents in use in the country of origin, authorised by the competent Authorities.

(e) Vaccination Certificate. Members of crew must be provided with an international vaccination certificate, not more than 3 years old, which should be presented on arrival, together with the individual Identity Card. Failing this, the crew will be vaccinated by the boarding doctors.

(f) Identity Cards. On arrival at an Argentine port, Masters of foreign vessels must deliver Identity Cards complete with photographs and finger-prints of each member of the crew, together with two copies of Crew List. One set is retained by the Migrations Department, and the other document remains in possession of the individual so that once identified, the crew member may return to the country without the necessity of obtaining new documents. The Captain is handed in exchange one copy of the Crew List, sealed and signed by the Immigration Officer to enable him to prove at other Argentine ports of call, that he has complied with the corresponding Regulation.

No member of the crew, except the Captain, is allowed to land until the Immigration Authorities have checked the crew with the Identity Cards.

Captains may if necessary have the Identity Cards completed with photographs in the Argentine at the first port of arrival. In such cases it is advisable that Agents are advised in advance so that preparations may be made against vessel's arrival. The Authorities will not allow any members of the crew to be disembarked until they have presented their Identity Cards or have had their photographs taken. Agents must present these Identity Cards to the authorities for stamping within 48 hours of arrival of the vessel. Immigration control is made at whatever hour the vessel arrives, forming part of the normal reception procedure.

(g) The stores lists should be completed with great care as a specially trained searchers' brigade has been visiting most ships as soon as free pratique is granted.

Particular care must be taken to declare all sizes and measures in the metric system. A plea of a regrettable mistake is not accepted and fines, if legally applicable, can be severe.

FREE PRATIQUE: Vessels take pratique in port, and may enter and berth if they fulfil the following conditions:

(a) Clean port of sailing and ports of call.

(b) No persons with infectious or contagious diseases or with fever on board.

(c) No cases during the voyage of disease of international concern, or of infectious diseases of an epidemic nature.

To be able to obtain this privilege of taking pratique in port, it is essential that Captains of all vessels arriving from abroad wireless their Agents, not more than twelve hours before arrival, that vessels under their command are in the sanitary conditions as required by Art. 45 of the regulations to enter port and go alongside.

On receipt of this message, Agents will present to the Health Authorities the request for a berth, accompanied by the telegram sent by the Captain, not less than six hours (nor more than twelve) in advance, detailing sailing port and ports of call, and indicating the approximate hour of arrival. If the wireless message is in code, Agents will give the necessary translation, and be held responsible for any error in such translated version.

The message may be sent either in English or Spanish, and we give specimen texts in both languages, which should be closely followed:

> "Addressed to Agency in Buenos Aires (or other port) solicitamos pedir libre platica telegrafica buque . . . (1), procedente de . . . (2), con escalas en . . . (3), con . . . (4) . . . tripulantes, (5) . . . pasajeros Buenos Aires . . . (6), pasajeros transito punto. declaro no tener abordo persones afectadas por ninguna enfermedad pestilencial punto estado sanatario bueno
> "captain . . . (7)."

or in English:

> "please request free pratique ms (or ss) . . . (1), proceeding from . . . (2), with calls at . . . (3), with . . . (4) . . . crews, (5) . . . passengers for Buenos Aires . . . (6). passengers in transit stop hereby declare that nobody on board affected by any pestilential disease stop sanitary condition good.
> "master . . . (7)."

In each case the gaps must be filled in as follows:

1. Port of vessel and flag.
2. Port of commencement of voyage.
3. Full details of all ports of call.
4. Number of crew.
5. Number of passengers for Buenos Aires (or whatever port first entered).
6. Number of passengers in transit.
7. Full name of Master, and also of doctor if there is one on board.

As there have been cases of insufficient information being received from vessels, and "added in" by Agents in the translation, the authorities have established this standard form which Masters must follow in their messages, and which will accompany the request to the Health Authorities.

This facility now refers to all Argentine ports, the message requesting Free Pratique to be sent to the vessel's Agent at first port of call, after which Free Pratique is automatic in all subsequent Argentine ports. If, however, a non Argentine port is called at en route, Free Pratique must again be requested at what will then become the "first Argentine port".

Agents will confirm to the vessel, by radio, the date and hour of granting of free pratique, and with this information in hand, vessel can enter port and go alongside. The Port Authorities will board as soon as the gangway is placed for their routine inspection, and until they have boarded, no one else should be allowed on board.

Vessels which do not meet the sanitary requirements, or come from unclean ports, must fly the yellow flag on entering for the necessary inspection alongside.

River Ports, Vessels proceeding to river ports get pratique at destination.

Vessels lightening. Tankers and other ships lightening in River Plate waters, provided they comply with Art. 45, may later continue their voyage and go straight into berth at port of destination to take free pratique there.

Sick crew members. If there is a sick person aboard, the international sign "W" must be flown on entering, and for Free Pratique, the customary yellow flag.

Captains must report to the boarding sanitary authorities those members of the crew having venereal complaints.

Asian and African Ports. In accordance with WHO requests, all vessels proceeding from these ports will be subject to an inspection of all galleys and store rooms.

Infected ports. Apart from the smallpox vaccination certificate, which is obligatory in all cases, the recent Cholera epidemics have caused the Health Authorities to tighten control. All persons on board vessels coming from ports in the countries named below must be in possession of the Anti-Cholera inoculation certificate, and from other zones as indicated as International Yellow Fever vaccination certificate.

Cholera. The international certificate is valid from the sixth day of inoculation, and for six months. The countries at present under control are:

Africa. Algiers, Alto Volta, Cameroon, Chad, Dahomey, Ghana, Ivory Coast, Liberia, Mali, Niger, Nigeria, Senegal, Sierra Leone, Somalia, Togo.

Asia. Burma, India, Indonesia, Malaysia (West), Muscat, Nepal, Pakistan, Philippines, Vietnam (South).

Epidemics are not officially admitted in the Arab Republic of Egypt and Sudan, but the certificate is advisable as a precautionary measure.

Other zones may be affected at short notice.

Yellow Fever. The vaccination certificate is valid for ten years, as from the tenth day of inoculation. It is required for all persons coming from:

Africa. Angola, Ghana, Kinshasa, Nigeria, Sierra Leone, Sudan.

South America. Brazil (territories of Roraima and Boa Vista), Colombia (Bolivar, Simiti, Boyaco and Paz de Ariporo).

Inflammables. It should be borne in mind that vessels carrying over 25 tons and under 100 tons of inflammables, explosives, etc., must be inspected in the roads before entering whether they have asked for Free Pratique by radio or not, although this is still advisable as the one inspection is independent from the other.

CLASSIFICATION OF ARGENTINE PORTS: In accordance with Article 31 of the Pan American Sanitary Code, the National Health Department has classified the Argentine ports as follows:

Clean Ports Class A—Buenos Aires, Rosario, Santa Fe, La Plata and Bahia Blanca.

Clean Ports Class B—San Nicolas, San Lorenzo, San Martin, Villa Constitucion and Concepcion del Uruguay.

Clean ports under the vigilance of the Health Department—Mar del Plata, Necochea and Diamante.

A clean port, in general, requires the absence of non-imported cases of cholera, yellow fever, pest, exanthematic typhus or any other contagious disease of a serious epidemic nature, that may be carried through international trade. The clean ports of Class A have competent staff and suitable sanitary equipment, also bacteriological laboratories, registers of disease and deaths, lazarettos, etc.

The clean ports of Class B are those that have not got all the equipment required for Class A.

FLAG: The flag of the Republic is three horizontal and equal bands of which the centre one is white, and the upper and lower, sky blue.

The official colours, flown by Naval vessels and all official entities are distinguished by a rising golden sun in the centre of the white.

All foreign merchant vessels must fly the Argentine flag from the highest mast while in territorial waters and ports, and fly their own national colours from the ensign staff.

PILOTAGE: A. *Ordering:* For Recalada Station, minimum 48 hours in advance, for all other services Agents of the vessels to be piloted must apply, in writing, to the Pilotage section of the Prefectura at their domicile before 1700 hrs. on the day before the service is to be effected, or on Sundays/holidays, before 1100 hrs. Pilots are obliged to render service in strict turn, in accordance with the register in the zone.

Applications for Pilots presented outside the hours established will be accepted but they will be classed under the headings of "Extraordinary" or "Urgent" applications. Pilots should always be ordered by the Agency; only in exceptional cases may a Pilot be requested direct by a Master, when by reasons of force majeure, or change of destination arrival is unforeseen. Vessels which are unaware of their Agents name may also request a Pilot direct. In such cases the request should be made direct, by radio, to the Prefectura with full explanations of the circumstances.

B. *River Plate Zone:* There are three Pilot stations in this Zone, namely; Port of Buenos Aires, Intersection and Recalada Pontoons.

(i) Inwards from sea. Inward vessels for up river ports Buenos Aires or La Plata have to take a Pilot at Recalada, and must give 48 hours advance notice of arrival, both to Agents in Buenos Aires and direct to Recalada, call sign LOJ 500 kc/s. (600 m.) Type A1, A2.

The operator is on duty from 8 to 10, 12 to 14, 16 to 18 and 20 to 2200 hrs. Communications can also be made on 462 kc/s. (649 m.).

The second Pilot station is at Intersection Pontoon km 37 measured out of Buenos Aires.

The Recalada Pilot takes all vessels to Intersection only, where another Pilot comes aboard, as follows:

if bound for Buenos Aires, a port Pilot.

if bound for La Plata, a river Pilot to La Plata Roads where a La Plata Port Pilot takes over.

if bound for upriver, a river Pilot.

(ii) Outwards to Montevideo. Vessels sailing from Argentine Plate ports to Montevideo must take an Argentine Pilot up to Montevideo Roads, not drop him at Recalada.

(iii) Inwards from Montevideo. Vessels arriving from Montevideo come in charge of a Uruguayan Pilot to Intersection, where the second Pilot takes over as above: Uruguayan Pilots, when in Argentine waters are subject to all Argentine laws and regulations.

(iv) Outwards to sea. Outward bound vessels (except for Montevideo) are obliged to disembark their Pilots at Recalada, except when prevented by weather, in which case the Pilot must land at first available port and his travelling expenses back to Buenos Aires are for vessel's account.

C. *River Parana Zone:* Comprises the River Parana from the port of Parana (km. 600 from Buenos Aires) down to its mouth, and that part of the River Plate limited to the East by its left bank to Punta Negra (Uruguay), thence to Intersection Pontoon, to the South by the North bank of the access channel to Buenos Aires Port, to the West the right bank of the River Plate from the entrance to Buenos Aires port to kilometre 0 of the River Uruguay.

On the River Parana, on distances exceeding 200 km. two special Pilots must be ordered, and therefore there will be four Pilots on board (two special and the two on turn), and the vessel has to pay for each of them, i.e. four times the tariff.

For distances of less than 200 km., the same ruling applies when continuous navigation is requested, which necessitates the employment of two Pilots on turn. However, when only one Pilot is asked for, only one special Pilot is nominated, if specially asked for, and consequently the tariff is double.

(i) Northbound. Pilots for navigation through this zone go on board, north-bound, at Intersection Pontoon, whatever the destination. If for Uruguayan ports in the River Uruguay, the Uruguayan port Pilot comes on board off Parana Bravo.

(ii) From river Uruguay. Vessels from River Uruguayan Ports, either Argentine or Uruguayan, change their River Uruguay Pilot for River Parana Pilot at the mouth of the Parana Bravo. However, if proceeding from a Uruguayan port, it is preferable to send the Parana Pilot to the Uruguayan port, and drop the Uruguayan Pilot off Nueva Palmyra. In certain cases the Argentine Parana Pilot can also come aboard at Nueva Palmyra.

(iii) Inside Parana River. There are two stations for despatching Pilots in the River Parana Zone; one at Buenos Aires and the other at Rosario. From the port of Buenos Aires Pilots will be cleared to take vessels to the Northern limits of the Zone, as also for vessels anchored at ports or places South of San Pedro, for any destination.

From the Rosario station, Pilots will be despatched to vessels anchored within the port of San Pedro, and all places to the North of the port, whatever their destination.

At some of the smaller ports in this zone the Prefecture will, to avoid delay to the vessel, authorise the River Pilot to berth the vessel. This request must be made when ordering the Pilot, but Agents at the river port must also apply for a Pilot, and see that he is employed if available.

Draft is ruled by the depth of water at Martin Garcia Bar, which is at present 24 ft. 6 in. at zero. This varies, and from time to time the Prefecture has authorized clearance or vessels up to 27 ft. Occasionally it happens, in spring, that there is less water in the river above Martin Garcia, but the Weekly Bulletin issued by the authorities covers this and all determining depths on the river routes.

(iv) To Montevideo. Vessels proceeding down river to Montevideo, take a Pilot at Intersection to Montevideo Roads, where a port Pilot boards.

(v) To La Plata. Vessels from up river ports for La Plata drop their river Pilot at Intersection, take another river Pilot to La Plata Roads (optional) and then a port Pilot there.

D. *River Uruguay Zone:* Comprises the River Uruguay from Concepcion de Uruguay, km. 188 to its mouth, and that part of the River Plate mentioned under the Parana River Zone. All Pilots for this Zone will be despatched through the Buenos Aires station.

E. *Bahia Blanca Zone:* Comprises the Bay from a line joining the buoys at Punta Tejada and Punta Lobos, up to the ports. There is no pilot vessel on station. The ordering of Pilots for the Bahia Blanca Zone is effected by the Overseas and Coasting office at that port. As the official tug for taking sea Pilots to meet incoming vessels is sometimes out of commission, Masters are requested to advise their Agents of the ETA 48 hours in advance. The cost of a special tug is heavy, and on occasions a saving can be made sharing expenses if the tug can take out Pilots for other incoming vessels, and also embark those from vessels outward bound from Bahia Blanca.

F. *Southern Ports:* South of Bahia Blanca and as far as Rio Grande pilotage is not obligatory in port, but when a vessel requires a Pilot application should be made to the Pilots' Office of the Naval Prefecture through vessel's Agents in Buenos Aires with at least five days advance notice. They go on board either at Buenos Aires, off Mar del Plata, or at other ports as required, and are authorized to operate in all of the Southern ports: San Antonio del Oeste, Madryn, Commodoro Rivadavia and the adjacent oil berths, Deseado, San Julian, Santa Cruz, Rio Gallegos, San Sebastian, Rio Grande and Ushuaia.

Their duties are to act as Port Pilots for entering, mooring, unmooring and leaving any of these ports.

Vessels from South Atlantic Argentine ports, for Montevideo should pick up an Argentine Pilot from Recalada to Montevideo Roads, but if such vessels pass further than five miles away from Recalada Lightship and pass direct to Montevideo Roads, there is no such obligation.

G. *Embarking/Disembarking:* Accommodation ladder. The gangway should be lowered to about 3 m. above the surface of the water, and adjusted in such a way that the Pilot only needs to climb the rope for this distance, in order to step on to the gangway. This rope ladder must have all the steps resting firmly against the side of the ship, in accordance with the requirements of the Safety of Life at Sea Convention. Similarly, the gangway must rest against or be secured to the side of the vessel, and Pilots may refuse to board if these conditions are not complied with.

RADIO: All times are given in GMT unless otherwise specified.

Storm Warning, Met. situation, Weather forecasts and Notices to Mariners. Are transmitted in clear (A1) in Spanish and then English, daily, from the following stations:

General Pacheco	LSV	3220.5 kc/s.	0.5 kW	01.30	Storm warning
Buenos Aires	LSV 2	5907.5	0.5 kW		Met. resume
	LSV 4	12100	1 kW		Forecast
	LSV 5	17520	1 kW		

and again at 1600

while LPD 5 transmits the same information on 512 kc/s. (5 kW) at 0148 and 1630 hrs.

The weather forecast covers the zone from Rio de Janeiro to Drake Strait and is valid until 1200 of the next day. The word "nil" is used if there is no information to report, as for example in storm warnings.

Vessels at sea can request a forecast and state of the weather at any time from Meteoro Baires, through Pacheco—LPD on 4177, 4187, 8354, 8374, 11531, 12561, 16708, 16748, 22220 and 22270 kc/s.

Radio Trelew LPZ 20 527 kc/s. 3 kW at 1730
Radio Comodoro
Rivadavia LPX 2 474 kc/s. at 0400
and 1800 as above.

Vessels at sea in this area can request a forecast from Meteoro Comodoro Rivadavia through LPX 2.

Notices to Mariners and Urgent River Notices. Are transmitted in Spanish and repeated in English by Radio Pacheco and Radio Comodoro Rivadavia.

Radio	LPD 5	512 kc/s.	5 kW	A2	at 00.30	Plate Area
Pacheco	LPD 6	4268 kc/s.	0.25 kW	A1	at 12.30	
Comodoro	LPX 2	474 kc/s.	3 kW	A2	at 13.30	20.00
Rivadavia	LPX 27	4428.6 kc/s.	0.5 kW	A3	at 04.00	08.00
					12.00	21.00

This station only reports on Lat. 42° S. to 52° S.

In both cases messages are repeated twice at intervals of 1 minute at the times indicated. Notices are repeated daily during 6 days from publication, preceded by the signal TTT, followed by the number of the notice, the letter R and then the text in this sequence:

Zone, sea, river, province, locality, etc.
Lat. and Long. if necessary.
News in question.
Sign off with SHN to indicate the authority (Servicio Hidrografia Naval).

If there is no notice to transmit, the stations will transmit "no hay avisos para navegantes", "no notices for mariners".

Notices to Mariners, and other items, in Spanish only—Notices to Mariners and other special information are given in Spanish only as follows:

Rosario—LSQ 38, 477 kc/s., A1, at 13.05:
Depth of water in the Parana River from Los Pajaros to Los Ratones and also the minimum depth between Santa Fe and Rosario.

Concepcion del Uruguay—LSQ 57, 477 kc/s., A1, 0.5 kW at 13.00:
Information on the Uruguay River from San Javier to Gualeguaychu.

Buenos Aires South Dock (Darsena Sur)—LSQ 9, 477 kc/s. A1, 1.5 kW at 0400, 0500, 0600, 0700, 0800, 0900, 1000, 1100, 1200, 1300, 1400, 1500, and 1545 hrs. except on Sundays and holidays.
Depth of water on the gauge at Riachuelo.

Buenos Aires Central de Comunicaciones (Prefectura Naval Argentina) —LSQ 4, 524 kc/s., A2, from 05 to 10 minutes each hour:
Depth of water indicated by the semaphores at Puerto La Plata and Riachuelo, and of the El Codillo zone of the Punta Indio Channel referred to zero on the Oyarbide tide gauge which is between pairs of buoys 24 and 25 in the Main Channel, and the new tide gauges referred to under "Buenos Aires", Tidal Signals.

Buenos Aires, Meteo (All A1)—LSV 3220.4; LSV 2, LSV 6, 5907.5; LSV 4, 12100; LSV 5, 17520 kc/s. at 1705 hrs.
Depth on the River Plate, River Parana, River Paraguay and River Uruguay zones. Buenos Aires, Radio Nacional LRA 870 kc/s. A3, at 0100, 1100, 1500, 1800 and 2100 hrs.
Depths of water and met. forecast for River Plate zone, this station also transmits tidal forecasts at 0100, 1000, 1315, 1600, 1900 and 2200 hrs.

Intersection Pontoon River Plate—LOI, 524 kc/s., A2:
Continuous information on local depths of water, on request.

Recalada Pontoon—LOJ, 524 kc/s., A1:
Same as Intersection.

Buenos Aires, Central de Comunicaciones (Navy—LOL 457.2, 2162.5, 4856, 8030, 13101, 17180, 22840 kc/s., A1, at 0230, 0300, 1300, 1330, 1930 and 2030 hrs.
Urgent Notices to Mariners, and Notices to Mariners covering the Argentine Coast and river systems.

Santiago River (La Plata)—LOM, 524 kc/s., A2,
from 05 to 10 minutes each hour:
Depth of water on the semaphore at La Plata.
From 10 to 15 minutes each hour:
State of tides in El Codillo zone of Punta Indio Channel, referred to zero on the Oyarbide tidal gauge (between pairs of buoys 24 and 25).

All Atlantic ports also transmit local notices to Mariners and weather forecasts in Spanish, the call signs and frequencies are indicated under each individual port, but between the powerful stations at Pacheco (Buenos Aires) and Comodoro Rivadavia, the whole coast is covered by the regular information given in both Spanish and English.

Facsimile Reports. Buenos Aires also transmits facsimile reports, of which the following correspond to surface forecasts, valid for 24 hours, and weather on Mercator projection.

		0800/0815 and 2000/2015 hrs.
From station	LRO 69	5185 kc/s.
and	LRB	10720 kc/s.

both of F4, white and black with a variation in frequency of plus 400 minus 400–5 kW and referred to observations made 8 hours earlier.

From the Antarctic, the Argentine Met. station at the South Orkney Islands transmits an analysis of the Atlantic area at 0300 and 1700 hrs. from LOK on 4250 kc/s. and 13051.5 kc/s.

Traffic Control and Safety at Sea. The Prefectura Naval Argentina, in charge of shipping activities including safety at sea, maintains a control centre at Buenos Aires, and another at Mar del Plata (where several hundred fishing vessels operate).

Objectives are to prevent collisions at sea or groundings and to keep a safe, expedite and orderly flow of traffic, as well as to alert safety and salvage systems when vessels need assistance.

A. – The Controlled area, from Buenos Aires, covers from parallel 57° W passing through pair of buoys No. 21 in the main entrance Channel to a line from San Isidro (Buenos Aires) to the mouth of the Parana Guazu river.

The Centre is on permanent duty in the following VHF-FM channels

16 frequency	156.8	mHz	for calls, assistance, urgency and safety.
12	156.6		notices to mariners.
14	156.7		annex to Channel 12.
6 and 8	156.3/4		bridge to bridge use.

Information All vessels in the area, both foreign and national, must inform the Centre of the following:

1. On entering the systems.
2. On leaving the systems.
3. On crossing km 57 in the main channel.
4. On arriving at Intersection Pontoon.
5. On crossing km 11 of the access channel to/or from Buenos Aires.
6. When anchoring, mooring or unmooring.

In each case, except 2 and 6, they will give the estimated hour of arrival at the next point en route.

Vessels will also report, on Channel 16, the following:
(a) Accident or fire on board.
(b) Sighting another vessel in apparent difficulties.
(c) Sighting any dangerous obstacle to navigation.
(d) Any serious reduction in visibility.

They will also advise, on Channel 12, as soon as possible, if any mark, light or navigational aid is damaged, missing, functioning badly or evidently out of position. Vessels must keep constant watch on Channel 16 from entering the zone to leaving it, and immediately after using any of the other channels will continue to listen on Channel 16. If, for any reason, this is not possible, they will report this to Control office by Channel 12.

The Centre transmits as routine information urgent Notices to Mariners, ruling weather conditions every 4 hours from 0000 and depth of water at El Codillo, La Plata port, Riachuela and Martin Garcia Bar 5 minutes after every hour.

Also tide and met. forecasts at 0900 and 1500. Storm warnings, visibility reports and obstructions in channels will be transmitted immediately on being reported, and then included in the next routine transmission.

Information can be requested from the Centre at any time.

The Administration procedure is that figuring in the International Union of Telecommunications and/or the Manual for the Use of Mobile services.

Time used in this service is local Argentine time, i.e. GMT less 3 hours.

Language: Personnel on duty in the Control centre will use only Spanish.

If necessary recourse can be had to the Code groups in the International Signal Code in use, and the spelling and lettering tables therein, or to Code Q.

B. – Mar del Plata Centre controls the area from 35° 30′ to 41° S. In this zone the system is voluntary for foreign flag vessels. The Centre operates on the folowing frequencies:

	Coastal Frequency						*Ship frequency*		
One:	Type	A3	H	2182	kHz	LSO	20	2182	a
				2100		LSO	69	2100	d
				4409.4		LSO	70	4410.8	f
				8754.4		LSO	71	8220.4	g
				13189.5		LSO	n2	12410.5	i
	A1	A2		500		LSO	20	500	
	A1			437		LSO	20	437	
				4325		LSO	21	4325	
				12728		LSO	57	12728	

Two: The Mar del Plata Centre maintains a continuous listening watch on:

A1	A2	500	kHz	LSO	20
A1		4325		LSO	21
A3	H	2182		LSO	20
		4110.8		LSO	70
		8220.4		LSO	71

and also listens from 00 to 05 minutes each hour on A1 12728 kHz and from 45 to 50 minutes every hour on A3 H on 2100 and 12410.5 kHz.

Vessels can use any of the frequencies listed under "one" after calling any of the frequencies in "two". In radiotelephony, except for frequencies 2100 kHz and 2182 kHz traffic will be routed in semi-duplex as per frequency pairs as indicated in "one" f. g and i.

In this are Notices to Mariners and Safety information will be transmitted as follows:

A3	H 2100	8754.4	0005 and 0505	Argentine time (GMT −3)
	4409.4	7854.4	0805	Argentine time (GMT −3)
	4409.4	13189.5	1205 and 1605	Argentine time
A1	437	4325	0100 and 0600	Argentine time
	4325	12728	1300 and 1900	Argentine time

Storm warnings or other urgent information will be transmitted in A3H and A1 on 500 kHz and 2182 kHz.

Information: Vessels on entering or leaving the zone will indicate:
1. Position, course, speed, whence proceeding, whither bound.
2. Sailing from or entering ports in the area.
3. Report geographical position every 12 hours counted from time of first advice, giving course and speed.
4. Any change in course or speed which alters the normal route and time at which it occurred.
5. Anchoring in or leaving the area.

Happenings: All vessels will immediately advise the centre of:
(*a*) Accident or damage to own or another vessel.
(*b*) Sighting any object dangerous to navigation.
(*c*) Any serious reduction in visibility, or unfavourable meteorological conditions.
(*d*) Having observed if any lighthouse, beacon, buoy, etc., is not working properly or is out of its correct position.

Language and Time: As in River Plate centre.

Time Signals. Time signals are transmitted from LOL Buenos Aires as follows: frequency 475.5, 2162.5, 4856, 8030, 13101, 17180, 22840 kc/s., A1. at 0100, 1300 and 2100 GMT, using the modified modern American system, with dots every second from 54.30 to 54.50, a dash of eight seconds ending with four half-second dashes, every minute to the hour, ending with a dash.

LOL also transmits on 5, 10 and 15 Mc/s. simultaneously in A1, A2, A3. Carrier waves are modulated in 1000 and 440 c/s. alternately.

Signal consist of dots every second, omitting the 59th second, and with one second interval before the next period commences. Transmissions is from 0800 to 0900, 1100 to 1200, 1400 to 1500, 1700 to 1800, 2000 to 2100, and 2300 to 2400 hrs. Argentine time (GMT less 3 hours daily), except Sundays and national holidays.

At the end of each period of transmission the call sign is given in morse, and before each period the words Observatorio Naval Argentino are followed by the hour and minute corresponding to the commencement of the next signal.

Modulation on 440 c/s. corresponds to the note LA of the fifth octave in the musical scale.

D/F BEACONS: A number of radio beacons specially for shipping have been installed down the coast, in addition to the airbeacons which can also be used, though with less accuracy.

There are 8 beacons, and 18 aerial beacons in use as follows:

Practicos Recalada – 35° 10′ 06″ S. 56° 15′ 00″ W. range 150 miles (on the lightship) frequency 320 kc/s., A2.

Signal PR once 9.7 seconds, followed by silence 2.3 seconds, a long dash 17 seconds, silence 1 second, dash 17 seconds., silence 1 sec. PR repeat the cycle, PR again and final silence 14.3 seconds, making a period of 120 seconds (2 minutes).

In good weather there are two transmissions every 2 minutes, from 02 to 08 and 32 to 38 minutes each hour.

In fog, one 2-minute transmission every 4 minutes from 02 minutes.

Punta Mogotes – 38° 05′ 32″ S. 57° 32′ 28″ W. range 120 miles. (On the lighthouse) frequency 295 kc/s., A2.

Signal PM once 9.8 secs., followed by silence 2.2 sec., dash 17 secs., silence 1 second, dash 17 secs., silence 1 second PM and repeat cycle. PM again, final silence 14.2 seconds, total period 2 minutes of the hour.

In good weather 2 transmissions as from 06 and 36 minutes of the hour.

In fog, continuous commencing on the hour.

Bahia Blanca – (On the Recalda Lighthouse) 38° 59′ 33″ S. 61° 15′ 38″ W. range 350 miles frequency 310 kc/s., A2, 0.2 kW.

Signal BB 9.8 seconds, silence 2.2 secs., dash 17 seconds, silence 1 second, dash 17 seconds, silence 1 sec. BB and repeat cycle, then BB and final silence 14.2 seconds, total period 2 minutes.

In good weather 2 transmissions 4 minutes apart from 04 and 34 minutes after the hour.

In fog, 1 transmission every 4 minutes from 04 each hour.

Bahia Blanca – (On the Light buoy El Rincon) 39° 23′ 12″ S. and 62° 00′ 48″ W. range 200 miles, frequency 310 kc/s., A1 and A2, 0.15 kW.

Signal RN once, 7 seconds, silence 2 seconds, 2 long dashes 41 seconds, silence 2 seconds RN repeat cycle, but 1 second first silence after signal then as before repeat RN and final silence 250 seconds, total 6 minutes.

In good weather, 2 transmissions from 02 and another 2 from 32 minutes of each hour.

In fog continuously from 02 each hour.

Bahia Blanca – (On the Segunda Barranca lighthouse) 40° 47′ S. 62° 16′ W. approx. range 200 miles, 310 kc/s., A2.

Signal SB 9.8 seconds, silence 2.3 secs., dash 17 seconds, silence 1 second, dash 17 seconds, silence 1 second SB and repeat cycle, repeat SB final silence 14.8 seconds, total period 2 minutes. In good weather, 2 transmissions every half hour, at 00/02 06/08 30/32 and 36/38 minutes on the hour, in fog, every 4 minutes 00/02, 06/08, etc.

Punta Delgada–Los – 42° 46′ 00″ S. 63° 38′ 00″ W. range 200 miles, frequency 315 kc/s., modulation 1000 c/s. modulated A2 signal PD 9.7 seconds, silence 2.3 seconds, long dash 00 seconds, silence 1 second, long dash 17 seconds, silence 1 second PD repeat cycle, PD final silence 14.3 seconds total period 2 minutes, good weather 4 transmissions every hour at 04, 10, 34 and 40 minutes after the hour. In fog, 2 minutes transmission and 4 minutes silence from 04 of the hour.

San Gregorio – 45° 01′ 30″ S. 65° 37′ 51″ W. range 200 miles, frequency 295 kc/s., A2, 2kW.

Signal IL 9 seconds, silence 3 seconds, long dash 17 seconds, silence 1 second, long dash 17 seconds, silence 1 second, IL repeat cycle. IL final silence 15 seconds, 2 minutes period in good weather 4 times every hour, 2 minutes each from 00, 06, 30 and 36 after the hour.

In fog, one 2-minute transmission and 4 silence, from 00 in the hour, but fog transmission temporarily suspended.

Cabo Blanco–Loa – 47° 12′ 12″ S. 65° 44′ 33″ W. range 200 miles (on the lighthouse) frequency 295 kc/s., A1, A2, 0.15 kW signal CB 12 seconds, 2 long dashes 37 seconds, CB repeat cycle CB final silence 250 seconds, total period 6 minutes. Good weather, twice from 08 and twice from 38 minutes after the hour; fog, continuously from 02.

Temporarily out of service. *See Table below.*

Medical Advice. Medical consultations can be made, without charge, from vessels at sea with urgent illness or accidents on board. Messages should be brief, but clear and concise, describing the symptoms of the illness with all possible details, including age and sex of patient and informing what first aid equipment is available on board.

For priority, messages should be preceded by the urgent signal XXX and be signed by the Master of the vessel.

The Medical section of the International Signals Code, 1931 volume 2, can be used, as also clear language if it is necessary to amplify the message.

Messages should be radioed to "Consulta Radiomedica" followed by the name of the coastal station used.

All consultations are gratuitous, they must be composed in Spanish, and indicate in this order:

Sex; Age; clinical antecedents; symptoms leading to the consultation; probable cause of the illness or conditions in which accident occurred; any other data which could assist diagnosis and facilitate treatment, such as pulse rate, temperature (in Centigrade) character and appearance of the wound, etc., and informing what first-aid equipment is on board.

The following stations at Buenos Aires give continuous service for this purpose:

LPD	4	44.5	kc/s.	A1	A2
LPD	68	4268	kc/s.	A1	
LPD	86	8646	kc/s.	A1	
LPD	32	13002	kc/s.	A1	
LPD	46	17045.6	kc/s.	A1	
LPD	91	22419	kc/s.	A1	
LPD	44	4434.5	kc/s.	A3	
LPD	8	8811.5	kc/s.	A3	
LPD	9	13180	kc/s.	A3	

LOAD LINE: Vessels are permitted to load to their Summer marks all year round at all River Plate Ports as well as Atlantic ports as far South as Cape Tres Puntas; inclusive (47° 06′ S. 65° 05′ W.) and provided they are Northbound or Eastbound. All ports in the River

The Following Beacons, all on A2, may be of assistance

				Freq.	*Time*
Bs. Aires, Aeroparque	OP	34° 31′ 18″ S.	58° 29′ 00″ W.	260	kc/s. continuous
Bs. Aires, el Palomar	PAL	34° 37′	58° 36′	400	from sunset, on req.
Bs. Aires, Moron	MOR	34° 40′	58° 38′	355	continuous
Bs. Aires, Ezeiza	EZA	34° 49′	58° 32′	365	continuous
La Plata	PTA	34° 53′	57° 56′	250 or 275	continuous
Punta Indio	PDI	35° 18′	57° 16′	325	09/2300
Dolores	DOL	36° 20′	57° 42′	235	on request, range 120 miles
Bahia Blanca	BCA	38° 43′	62° 12′	330	daylight only, not Sundays/holidays, range 250 miles
Comandante Espora	EPO	38° 45′	62° 10′	370	daylight
San Antonio Oeste	SAO	40° 44′	64° 58′	220	daylight
Trelew	TRE	43° 14′	65° 19′	205	daylight, range 300 m.
Comodoro Rivadavia	CVR	45° 47′	67° 30′	230	daylight, range 230 m.
Puerto Deseado	ADO	47° 44′	65° 55′	210	continuous
San Julian	SJU	49° 18′ 30″	67° 46′ 30″	375	occasional, range 150 miles
Santa Cruz	SCZ	50° 01′	68° 34′	245	occasional, range 250 miles
Rio Gallegos	GAL	51° 37′	69° 17′	330	09/2300 350 miles
Rio Grande	RGN	53° 47′	57° 40′	365	on request
Ushuaia	USU	54° 49′	68° 19′	235	on request 200 miles

Parana, River Uruguay and the River Plate proper are fresh water.

With regard to Loaded Draft, the mean draft and not the maximum must be taken into account, and this should not exceed the Load Line marks.

On the mean draft an allowance will be made equal to the weight of the fuel vessel will consume until it reaches the Sea from up-river ports. No allowance is given to vessels leaving Buenos Aires or La Plata.

LIGHTENING ANCHORAGE: Vessels wishing to lighten cargo and perform topping-off operations may do so in the following positions:

Position No. 1	34° 42.0′ S.	57° 57.2′ W.
No. 2	34° 44.1′ S.	56° 48.0′ W.
No. 3	34° 46.0′ S.	56° 48.0′ W.
No. 4	34° 43.9′ S.	57° 57.2′ W.

For ships performing such operations in the River Parana, after passing Martin Garcia, the respective zone is between km. 172 and km. 173 in the River Parana Guazu, outside the channel. It is forbidden for ships not lightening or topping off to anchor at these points.

SPEED: *Maximum speed in Ports, Channel and rivers* – Vessels operating in the proximity of an open port, close to quays or loading places where other vessels or barges are operating, will reduce speed to a maximum six knots.

In particular this refers to

Rosario	between Saladillo and Punta Barrancos (La Florida)
San Nicolas	between km. 347 and 351
Ramallo	between km. 322 and 326
Zarate	between km. 104 and 111
Campana	between km. 96 and 98

FUMIGATION: *(a) Exemption.* Vessels of foreign registry will be fumigated when proof is not shewn that fumigation has been effected by competent authority, and in a port duly authorized by the International Office of Public Hygiene, or that they have been exempted from such operation by the Health Ministry at authorized ports, within the last 6 months. Vessels arriving with an expired Fumigation or Exemption Certificate, will be fumigated except where a request of one month's grace is made to allow vessel to return to home Country or a request is made for an inspection. Should the vessel be in either case in a sanitary condition and have *no trace of rats*, an Exemption Certificate will be granted.

(b) Certificates are of no value if vessel is not in good sanitary condition. The Authorities will not recognize the validity of any Certificate or issue any Exemption Certificate to those vessels which in the opinion of the National Health Ministry, after inspecting the vessel, are not in a good sanitary condition. Both cyanide and sulphur (Clayton process) Fumigation Certificates are accepted by the Health Ministry.

(c) Permit to commence loading of vessels ordered to fumigate. No vessels which have had an annotation on their Free Pratique Certificate to the effect that they must be fumigated or inspected, are permitted to commence loading before these requisites are complied with. To this effect the necessary advice will be passed by the Customs or Port Authorities to the Health Ministry for intervention.

(d) Ports where vessels can fumigate. The sulphur fumigation is exclusively effected by the Health Ministry at the ports of Buenos Aires, La Plata and Rosario. The cyanide process is effected by private companies at practically every port of the Republic, provided sufficient notice is given, as at some ports it is necessary to bring the equipment from other ports.

Captains are recommended to ensure that their vessels are in good sanitary condition and free from traces of rats on arrival. Even although vessels may be given a Free Pratique Certificate, this does not always free vessel from fumigation if on arrival at port of loading, the Authorities discover traces of rats on board. The granting of Free Pratique has, in fact, no relationship to the granting of fumigation exemption, and permission to load.

(e) Weevil. The National Grain Board is very strict on inspecting for weevil on board vessels destined to load grain.

TIDES: Following data indicates the tidal range at Spring and Neaps in feet and tenths of a foot indicating the Argentine chart number on which the respective datum is given, and the height to be added to or deducted from that datum at the various ports, which are given in North/South rotation.

	Springs	*Neaps*	*Chart number*
Martin Garcia	2	0.4	70
Buenos Aires	3.2	0.8	176
Mar del Plata	3.8	1.2	18
Quequen/Necochea	5.2	2	18
Puerto Belgrano (Bahia Blanca)	12.6	6.4	74
S. Antonio Oeste	30.4	11.8	6
Puerto Madryn	18.8	6	92
Comodoro Rivadavia	19.6	7.4	30 (plus 0.6 feet)
Puerto Deseado	17.2	6.2	21
San Julian	28	9.2	H 350
Santa Cruz	39.8	9.4	2
Rio Gallegos	39.4	9.6	H 451/2
Cabo Virgenes	37.8	7.4	203 (minus 2.5)
San Sebastian	33.8	9.4	84 (minus 0.7)
Rio Grande	22.6	7.6	67 (minus 2.1)
Ushuaia	5.2	2.2	45
and for comparative purposes.			
Montevideo	0.8	0.4	242 (plus 0.8)
Punta Arenas	5.6	1	English chart 545

DRY DOCKS AND FLOATING DOCKS: There are two dry docks at Buenos Aires and two at Bahia Blanca, and six floating docks at Buenos Aires, with smaller ones available at Rosario and Corrientes.

The four dry docks are under the control of the Ministry of Marine as are some of the floating docks, but all are available for merchant vessels, and private repair companies are permitted to carry out work in these Government docks.

(a) Applications for entering either Dry or Floating Docks are the same:

Name and class of vessel; flag, characteristics; NRT as per Register; nature of repairs; estimated stay in dock, date when ready to enter dock; vessels' Register number and plans of the hull for docking.

Tank vessels must also supply a "Gas Free" certificate.

(b) Buenos Aires.—The two dry docks are at right angles in the North Basin, on the Northeast side and have the following dimensions:

No. 1 493 ft. (150 m.), breadth at top of entrance 66 ft. (19.75 m.) gradient 1 : 300.
No. 2 590 ft. (180 m.), breadth at top of entrance 92 ft. (22.10 m.).

Vessels with large beam can only enter if their draft does not exceed 20 ft.

(c) Bahia Blanca.—The two dry docks are in the Naval Dockyard base.

No. 1 is 705 ft. (215 m.) in length, width on sill 72 ft. 6 in. (22.12 m.).
No. 2 is 672 ft. 6 in. in length (closed) (205 m.).

(d) Floating Docks.—There are seven in Buenos Aires, as follows:

	Lifting Capacity	*Length*		*Internal Breadth*	
No. 1	3,500 tons	413′	126.10 m.	56.0′	17.10 m.
No. 2	1,500 tons	300′	91.50 m.	41.0′	12.50 m.
No. 3	750 tons	216′	65.79 m.	44.0′	13.32 m.
No. 4	750 tons	216′	65.79 m.	44.0′	13.32 m.
No. A	12,000 tons	565′	172.50 m.	86.0′	26.20 m.
No. B	2,800 tons	397′	110.00 m.	60.7′	18.05 m.
No. C	1,000 tons	246′	75.00 m.	51.4′	15.68 m.

All supply cranes, fire fighting equipment, compressed air, water pumps, electric supply – 380 V. and 110 V. AC or 220 V. DC. Telephone, sanitary discharge for ship's bilges and sanitary services on the dock.

FUEL: Bunker stocks of diesel oil are available in bond at Buenos Aires, Bahia Blanca and Montevideo, thus these ports are the most convenient for taking Diesel bunkers. It is available at other ports, but has to be transported by lorry from Buenos Aires. Lorries are unable to go alongside at some of the elevator berths, and there are no oil barges at Rosario, San Nicolas, or Necochea.

At Buenos Aires there are barges of 150 to 550 tons with tanks to carry all classes of oil. If smaller quantities are required transportation can be effected by lorries from the tanks, the cost being cheaper than barging.

Oil can be transported by lorry to any berth in the port of Buenos Aires.

STEVEDORES: Working hours are officially 0700/1300; 1300/1900; 1900/0100 and 0100/0700. From 1900/0100 and 0100/0700 there is a 100% surcharge on Mondays to Fridays, or 200% on Saturdays, Sundays or holidays. On Saturdays the second shift (1300/1900) and on Sundays/holidays the two day shifts (0700/1300 and 1300/1900) are paid with 100% surcharge.

In Parana River ports, shifts start and finish one hour earlier, except at Santa Fe.

It is forbidden for a man to work more than one shift daily, unless no other labour is available at the halls, and the Port Captain agrees.

Use of mechanical appliances is encouraged, and when the Port has not sufficient available, the Stevedoring companies hire this to the vessel to speed up operations.

Stevedoring damage: It is essential that Master and/or Agent leaves on immediate record any damage done to vessel or cargo by the stevedores, in order to assist in recovering the cost of repairs.

Holidays and Non-Working days: National Holidays; January 1st (New Year's Day), Good Friday, May 1st (National Workers' Day), May 25th (National Independence Day), June 20th (Argentine Flag Day), July 9th (Independence Day), August 17th (Death of Gral. San Martin), December 25th (Christmas Day).

Non-Working Days: Maundy Thursday, December 8th (Catholic Holiday).

Drinking Water. A good supply of drinking water should be available on board, and in hot weather this must be iced.

GRAIN LOADING: On a North/South basis. See table below.

WATCHMAN: The use of watchmen is obligatory in all ports, and they are the auxiliary delegates of the Maritime Authority. One man per gangway must be placed. Masters may also place a crew member on watch, but in ports where there is an official service the official watchmen must be used. His duties are to control access to the vessel, control the shipment or discharge of prohibited articles, to revise all packages brought on board or landed, see that the moorings are in order, that the gangway is duly illuminated and that rat guards are in place.

WHARF CLEANING: It is the Master's duty to see that the Wharf is properly cleaned up before his vessel vacates a wharf. Port authorities can do this, and charge the Agents of the vessel last berthed with the cost.

HATCHES: Opening and closing normally carried out by the stevedores in each port. All hatches must be kept closed when

TABLE A

		Berths	Spouts	Workable simultaneously	Rate per hour each	Total
Santa Fe 72,500 tons	Unit 1	2	8	3	300/400	1200
	unit 2 N.W.	1	6	2	200	400
	unit 2 S.W.	1	2	2	200	400
Diamante 20,000 tons		1	4	2	500	1000
San Lorenzo/San Martin 320,000 tons	unit 8	1	2	1	150/180	150
	unit 10	1	3	1	150/180	150
Rosario 326,100 tons (80,000 in const.)	unit 1	1		2	170	340
	unit 2	1		2	200	400
	unit 3 × 4	1		2	250	500
	unit 4 × 8	1		2	under repair	
	unit 5 × 10	2		2	200	400
	unit 6 × 13	2		6	200	1200
Villa Constitucion 225,500 tons		2		1 each	300	600
		2		1 each	300	600
San Nicolas 53,000 tons (16,000 in construction 1973)		1	5	2	500	1000
Ramallo 12,080 tons		1		2	250	500
San Pedro 7,560 tons		1	7	1	400	400
Concepcion del Uruguay 3,200 tons (20,000 in construction)		1		1	not ready	
Buenos Aires 219,400 tons (20,000 in construction)	Basin D	5	29	5	500	2500
	Dock 3	1	6	1	500	500
	South Dock	1	4	1	400	400
	South Dock	1	3	1	400	400
Mar del Plata 25,000 tons		2	5	2	400	800
Quequen 404,500 tons	unit 1 3/4	1	4	2	450	900
	5/6	1	4	2	450	900
	unit 2	1		1	400	400
	extension berth	1		1	230	230
Bahia Blanca 617,480 tons	old elevator ext. 1/2	2	12	2/4	250	500
	3/4	2	8	2/4	400	800
	central elevat. 5/6	2	10	2/4	480	960
	7/8	2	10	2/4	480	960
	new elevator 9	1	12	2	1000	2000

vessels are not operating, and when leaving port, must be well battened down and covered with two tarpaulins.

RAT GUARDS: All moorings must be provided with regulation pattern rat guards, 80 cm. diameter.

As part of the rat control gangways must be painted white and fully illuminated at night. Fines are imposed for non-compliance.

FENDERS: At all ports, vessel must be boomed off the quay at least one m. fifty cm. Any type of fender meeting this requirement will do, but at San Nicolas, special fenders are supplied.

NIGHT LIGHTS: All vessels when made fast must illuminate that side towards the water with at least one screened light. When vessels are double berthed, the one lying second off must comply with this rule. Similarly, vessels moored with either stern or bows to shore must show a light over the anchor chain to seaward. Vessels laid up or being dismantled are exempt from this, but owners are responsible for any resulting damages.

DESTINATION CHANGE: When at sea if there is any change in destination, within the Argentine, Masters must report this by radio to the Marine Prefecture, indicating the reasons for such change.

DESPATCHES: Once despatch is granted, this is valid for twelve hours only, after which period new despatches must be requested, and reasons given for not sailing. In ports where local conditions impose a longer limit, the maximum allowable is thirty hours.

SEAMEN'S INSTITUTES, HOME AND CHURCHES: There is one hostel for seamen, and five institutes operating in Buenos Aires and one in Rosario, as follows:

Stella Maris (Apostleship of the Sea)
Independencia 20 (corner Ing. Huergo). Telephone: 33–0832
Chaplain – Father Alex Dalpaiz CS. Open every day. Vessels visited daily. Hotel – Rooms, Meals, Bar. Information – Port Office, Books, Money Exchange, Souvenirs. Amusements – Dancing, table tennis, billiards, television, excursions. Salon Dance Wednesdays, Saturdays and Sundays.

Religion – Mass every Sunday at 1930 hrs., and in the morning on board ship by request. Confession at all times. Night prayer for all seamen.

Football games arranged. Books freely exchanged.

The Missions to Seamen
Cochabamba 223. Telephone 33–0326
Chaplain – The Rev. E. W. Casson. Open daily from 1900 hrs., with dances on Tuesdays, Thursdays and Saturdays from 2100 hrs. Shop, post office, billiards (three tables), snooker, table tennis, television, bar (beer, no spirits), etc.

There is a service of Holy Communion at 1900 hrs. every Sunday. Football games and excursions arranged. Vessels are visited.

Sjomandskirke
Ing. Huergo 1263. Telephone: 33–3861
Open daily from 0800 hrs. Library, billiards, table tennis, sightseeing visits arranged, as also football matches. Vessels visited every day.

Church services every first Sunday at 1030 hrs.

Axel Johnson Minne till Svenska Sjoman
Juan de Garay 80. Telephone: 33–7304
Open daily from 1800 hrs. Library, sightseeing arranged.

Details of religious services on board of Swedish Church in Azopardo 1428 (round the corner from the Johnson Foundation).

Dansky Kirke
Carlos Calvo 257. Telephone: 33–9154
Danish seamen are welcome at the Norwegian Centre, while at the Church the office is open every Tuesday from 2000 hrs. to 2200 hrs. for assistance, and the Young People meet on Tuesdays and Fridays from 2000 hrs. to 2200 hrs., all being welcome.

Church services are at 1000 hrs. every Sunday, and on third Sunday in every month at 1600 hrs.

Finnska Sjomens-Kyrken. Suommerimien Kirkko
San Juan 234. Telephone: 33–6797. Open daily 1800 hrs. to 2200 hrs.

Rosario: The Missions to Seamen at Sarmiento 209.

II *RIVER PLATE PORTS*

Acevedo
Acindar
Atucha
Borghi
Buenos Aires
Buitrago
Campana
Concepcion del Uruguay
Diamante
Ibicuy
Ing. Rocca
La Plata
Ramallo
Rocca
Rosario
San Lorenzo
San Martin
San Nicolas
San Pedro
Santa Fe
Villa Constitucion
Zarate

THE RIVER PLATE

The River Plate, or Rio de la Plata, is formed by the rivers Parana and Uruguay, and is one of the greatest river systems in the world, the Basin covering nearly four million square kms. It is some 150 miles long, and the mud and sand in the waters give a thick brownish colour. Tides are small, but the water level is subject to frequent and sudden fluctuations on account of the weather.

Distance Table
Montevideo and Buenos Aires to Parana and intermediate ports
Nautical miles

	Montevideo	Recalada Practicos	La Plata	Interseccion Practicos	Buenos Aires	Martin Garcia	Ibicuy	Campana	Zarate	San Pedro	Obligado	Ramallo	San Nicolas	Villa Constitucion	Rosario	San Lorenzo	Grondona	Gaboto	Diamante	Alvear	Santa Fe	Bajada Grande	Parana
Montevideo	—	16	118	108	128	145	205	243	238	239	249	261	276	285	310	326	343	348	374	385	400	406	410
Recalada Practicos	16	—	102	92	112	129	189	227	222	223	223	245	260	269	294	310	327	332	358	369	384	390	394
La Plata	118	102	—	10	30	47	107	145	140	141	151	163	178	187	212	228	245	250	276	287	302	308	312
Interseccion Practicos	108	92	10	—	20	37	97	135	130	131	141	153	168	177	202	218	235	240	266	277	292	298	302
Buenos Aires	128	112	30	20	—	57	117	155	150	151	161	173	188	197	222	238	255	260	286	297	312	318	322
Martin Garcia	145	129	47	37	57	—	60	98	93	94	104	116	131	140	165	181	198	203	229	240	255	261	265
Ibicuy	205	189	107	97	117	60	—	41	36	37	47	59	74	83	108	124	141	146	172	183	198	204	208
Campana	243	227	145	135	155	98	41	—	5	72	82	94	109	118	143	159	176	181	207	218	233	239	243
Zarate	238	222	140	130	150	93	36	5	—	67	77	89	104	113	138	154	171	176	202	213	228	234	238
San Pedro	239	223	141	131	151	94	37	72	67	—	10	22	37	46	71	87	104	109	135	146	161	167	171
Obligado	249	233	151	141	161	104	47	82	77	10	—	12	27	36	61	77	94	99	125	136	151	157	161
Ramallo	261	245	163	153	173	116	59	94	89	22	12	—	15	24	49	65	82	87	113	124	139	145	149
San Nicolas	276	260	178	168	188	131	74	109	104	37	27	15	—	9	34	50	67	72	98	109	124	130	134
Villa Constitucion	285	269	187	177	197	140	83	118	113	46	36	24	9	—	25	41	58	63	89	100	115	121	125
Rosario	310	294	212	202	222	165	108	143	138	71	61	49	34	25	—	16	33	38	64	75	90	96	100
San Lorenzo	326	310	228	218	238	181	124	159	154	87	77	65	50	41	16	—	17	22	48	59	74	80	84
Grondona	343	327	245	235	255	198	141	176	171	104	94	82	67	58	33	17	—	5	33	44	59	65	69
Gaboto	348	332	250	240	260	203	146	181	176	109	99	87	72	63	38	22	5	—	37	48	63	69	73
Diamante	374	358	276	266	286	229	172	207	202	135	125	113	98	89	64	48	33	37	—	11	26	39	36
Alvear	385	369	287	277	297	240	183	218	213	146	136	124	109	100	75	59	44	48	11	—	15	21	25
Santa Fe	400	384	302	292	312	255	198	233	228	161	151	139	124	115	90	74	59	63	26	15	—	6	10
Bajada Grande	406	390	308	298	318	261	204	239	234	167	157	145	130	121	96	80	65	69	32	21	6	—	4
Parana	410	394	312	302	322	265	208	243	238	171	161	149	134	125	100	84	69	73	36	25	10	4	—

The official depth at zero of the long entrance channel from Recalada to the Port of Buenos Aires is presently (this varies slightly from time to time):

	Width of channel m.	*Depth* ft. in.	*Alternative width* m.	*Depth* ft. in.
Punta Indio	110	29	200	26 6
and of the access channel from the Roads (km. 37 to km. 9.8)	55	30	80	29
North Channel (km. 9.8 to Anteport)	60	27	80	24
South Channel (km. 8.2 to Boca)	30	24 6	50	19

From Recalada Lightship West the Bay is all fresh water.

Vessels drawing 31 ft. or even 32 ft. (fresh water marks) frequently navigate safely. The tidal rise and fall is from three to five feet, but the state of the river is influenced to a far greater extent by the force and direction of the wind. There is no guarantee that a vessel drawing 31 ft. may not be caught by low water caused by a North wind, which carries the water seawards. Just as a North wind will reduce the depth of water, so a Southerly or Southeasterly wind raises it considerably, often several feet.

Winds from S.W. to E.N.E. through N. make the level drop, North being the strongest in this sense.

E.N.E. to S.S.W. winds make the water rise, S.S.E. having the greatest influence.

Between S.W. and S.S.W. or N.E. and E.N.E. the influence of the winds is much less.

Vessels often touch bottom, or even bump slightly, but as the bed of the river is soft mud and silt, one never learns of these ships reporting damage. The Plate Pilots, of course, warn Masters of this not infrequent occurrence. The docks and basins in the port also have soft mud bottoms, except for the entrance between North Basin and Dock 4, and it is quite customary to see vessels lying safely aground when loading or discharging.

RECALADA LIGHTSHIP: Vessels enter the Plate system passing the Recalada Lightship, 16.8 miles South of Montevideo at 35° 10′ 06″ S. and 56° 19′ 06″ W. At this point it is obligatory to take an Estuary Pilot, if proceeding West, and a minimum 48 hours notice must be given both to Agents in Buenos Aires and to Recalada Lightship.

The Recalada Lightship and Pilot station is a small vessel, whose hull is painted in vertical black and white stripes, two m. wide, and with an orange/red housing.

Apart from the usual pilot lights (white above red) there is a lantern on the foremast, with a white flash every eight seconds (one second light, seven seconds eclipse) placed at 19 m. above river level, range twelve miles.

The lightship also has a fog signal, period thirty seconds sounding for three seconds and silent for 27.

Radio call sign is LOJ on 500 kc/s. type A1, A2, transmitting in clear every hour from 05 to 08 and 35 to 38 minutes. Operator on watch 08/10, 12/14, 16/18 and 20/22, also listens on 462 kc/s.

Punta Indio Channel and Privileged Zone

The term "Adjacent Zone" comprises the zones of the main channel of the River Plate which extends 500 m. to either side of the buoy at km. 57 and Buoys No. 30 at Punta Indio Channel, likewise 300 m. on each side, outwards, of the pairs of buoys marking the Punta Indio Channel between Buoys No. 30 and 1.

Vessels navigating in these zones have equal privileges to those navigating the Punta Indio Channel, which comprises the zone of the general channel of the River Plate between Buoy No. 30 and the Recalada Lightship following the route buoyed for ocean going vessels by the Ministry of Public Works.

Vessels drawing over 24 ft. entering or leaving the River Plate are obliged to traverse the Punta Indio Channel from Buoys 1 to 30, and the Adjacent Zones existing between Buoys 30 and km. 57.

Vessels drawing 21 ft. and up to 24 ft. inclusive must follow the route of the general channel and the corresponding Adjacent Zones and may make use of the Punta Indio Channel or not, depending on the depths of the river.

Vessels drawing 19 ft. but under 21 ft. must use the general channel of the River Plate and the corresponding Adjacent Zones, but can only use the Punta Indio Channel between Buoys 19 and 23 when depth of the river makes this advisable.

Vessels drawing less than 19 ft., wishing to follow the route of the main Channel, may do so through the corresponding Adjacent Zones but are forbidden to navigate along the Punta Indio Channel.

INTERSECTION LIGHTSHIP: This Pilot station, near km. 33.5 and 169 km. West from Recalada is on the North side of the principal channel, at 34° 39′ 30″ S. and 58° 00′ 04″ W.

Hull, mast and superstructure are painted sky blue and the inscription on the hull is "Practicos Interseccion" in black letters. At night, two lights are shown on the fore-mast, one white about 11 m. from the deck, and below this a red light at about 7 m.

Radio call sign LOI, on 500 kc/s. wavelength 600 m. Operator on duty from 8 to 10, 12 to 14, 16 to 18 and 20 to 2200 hours.

At this point the estuary Pilot concludes his stint, inwards, or takes over outwards, and port Pilots for Buenos Aires take over or finish. Similarly up river Pilots for vessels bound for Uruguay or Parana rivers take over or deliver vessels here.

If, owing to the bad weather or force majeure, the pontoon's launch cannot trans-ship Pilots, by day the blue flag with the letter "P" normally flown at the fore will be struck, or by night the red and white Pilot lights will be extinguished, and a red light exhibited at the stern.

At Intersection vessels anchor while waiting for draft to proceed to the Parana or Uruguay rivers, as well as those awaiting berth in Buenos Aires. Such vessels should keep well clear of the Pontoon to leave ample room for those taking or disembarking Pilots.

The holding ground here is not good, being soft mud. All ships drawing more than 15 ft. must, before leaving Martin Garcia or Interseccion outward bound, ascertain the state of the channel from LOI (Radio Interseccion) who will give the departure time, draft, and speed of vessels navigating in the channel. Only after receiving this dual information can Masters and Pilots decide to proceed, and then must communicate time, draft and speed to Radio Interseccion. Vessels drawing less than 15 ft. can navigate freely between Martin Garcia and Interseccion, but must give way to vessels of deeper draft.

INTERSECTION TO MARTIN GARCIA: From Intersection (km. 38) to Martin Garcia (km. 106) vessels will anchor near km. 37 until there is sufficient water, with 1 ft. under the keel and a rising tide or river. If it is calculated that the vessel will have 1 ft. clear through the whole passage, she may leave, but on a falling or stationary river, she must adjust speed to avoid the difficulties between km. 37 and km. 79.

From Martin Garcia to Intersection, vessels drawing 22 ft. 6 in. or more will leave when conditions assure 1 ft. 6 in. of water under the keel. It is essential to radio LOI as above to check on tides, etc. Such vessels coming down river must also communicate to LOI the passing of km. 101 and 38, while those going up river must communicate passing km. 38, 72 and 101.

Maximum draft permitted between km. 39 (Intersection) and km. 93 (Canal Nuevo) is 26 ft. and a speed of 10 knots or over, or with 8 to 10 knots, maximum 24 ft.

In the sector Intersection/Martin Garcia vessels will anchor in any suitable place until depth of water permits them to go upstream on a rising river.

Vessels drawing 22 ft. or more are recommended to cross only between km. 72/74, 80/82 and 96/96. Those drawing less than 22 ft. and with at least 3 ft. under their keel can also cross between km. 52/56 and 98/100.

MARTIN GARCIA BAR: The Flats (rock outcrops) in the estuary from Martin Garcia Island down to Farallon have remained practically unchanged for fifty years. The Island itself, in Lat. 23° 11′ S. and Long. 58° 17′ W. is an almost circular mass of granite, about 27 m. high and some three miles in circumference. Shores are muddy but also rocky.

It commands the entrance to the Rivers Parana and Uruguay, and all vessels using these rivers must pass within half a mile of the shore on the South side, or within less than a mile by the Northern Channel. There is an Argentine Naval detachment there.

Important: It is always said that Martin Garcia Bar rules the rivers; this is not strictly correct as, usually in the second half of the year, there may be less water in the stretches above Rosario, and at times even below San Nicolas to San Pedro, where new shallows keep forming which have constantly to be watched. Caution should be used, therefore, from July to January in this connection.

Light House. At an elevation of 38 m. a light is shown from a circular stone tower standing 13 m. high in the centre of the island.

Radio communication. The lighthouse is provided with a wireless station (call letters LOH) which transmits the depth of water on the semaphore at the following hours: 2, 5, 8, 11, 14, 17, 20, and 2300 hours.

Tidal Signals. These are made from a signal mast placed alongside the lighthouse.

Day Signals

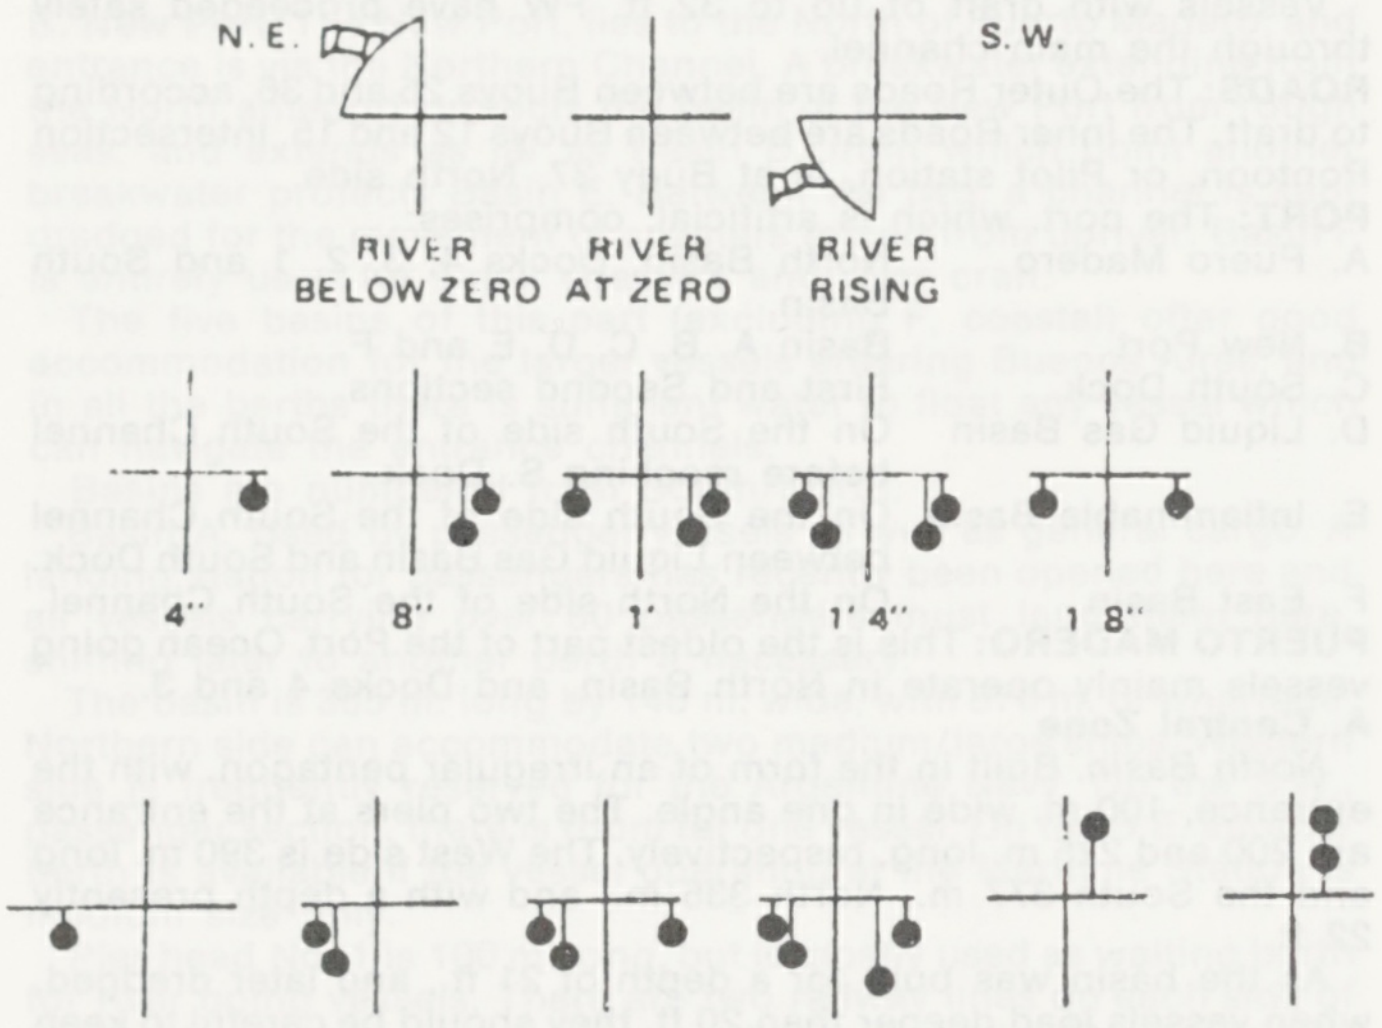

The figures given below the corresponding signals indicate the level of the river in feet and inches either above or below zero mark.

To obtain the effective depth in Martin Garcia Channels, 26 cm. (10 in.) should be deducted from the draft of water indicated on the semaphore

Night Signals

	(White flash)	Cycle: 30 seconds
	(Red flash)	Long flash: 2.5 sec. each.
	(Green flash)	Short flash: 6/10 sec. each.
White flashes		Rising tide: One long. Falling tide: Two short.
Red flashes		Above zero: For each m.: One long. For each 10 cm.: One short.
Green flashes		Below zero: For each m.: One long. For each 10 cm.: One short.
Green and red flashes		Zero: One green and one red, both short.

Depth of water here varies from hour to hour, with no pattern, and is not dependant on the depth of water in the Parana. The only relation between the River Parana and Martin Garcia and San Pedro Bars, seems to be that with a full and strong river, the water which is blown into the Plate Estuary by Southerly winds against the strong head of the river, makes deeper water than a similar Southerly wind opposed to a smaller stream from the river. Likewise, the water blown out to sea by Northerly winds causes lower depths when the river is running strongly than when it is low. The effect is almost that of a new or full moon on the lunar tides.

It must always be remembered, therefore, that the dominant factors from Martin Garcia seawards are the direction and force of the wind. A Southerly wind will bank up the water, while a Northerly wind will blow it out. There may be, say, 30 ft. in the Parana, with a strong North wind, and less than 20 ft. on Martin Garcia. With the wind in the Southeast, the depth at Martin Garcia can rise in a few hours up to 30 ft.

A prudent course is never to attempt to cross Martin Garcia drawing more than 25 ft. even with the river at its highest.

Martin Garcia lies at km. 99.4 from Buenos Aires, via Intersection, i.e. at km. 62.4 from Intersection.

Vessels continue North to km. 140, at which point the Uruguay and Parana Rivers meet to form the River Plate. This is opposite Nueva Palmira in Uruguay, and at this point the River Uruguay buoy numbers start from km. 0, while the Parana numbering continues from 140 on through the Parana Bravo, which is the Northerly arm of the extensive Parana Delta.

WEATHER: *The yearly average direction of winds* of Force 7 or more, as observed at Recalada Lightship shows:

N.	N.E.	E.	S.E.	S.	S.W.	W.	N.W.
0.8	1.3	2.7	3.4	5.2	3.7	1.9	1.3

expressed in per cent of winds observed, the least frequent being the North. Division is relatively even over the year, with perhaps August showing a higher incidence of storms.

The average velocity of winds from the various directions, over the year, is 6.8 knots on the coast or 12.5 knots at Recalada Lightship, the highest figures being from S.E., S. and S.W. at 8.3, 9.3 and 9.2 knots respectively.

Percentagewise the direction of the winds through the year is remarkably even:

N.	N.E.	E.	S.E	S.	S.W.	W.	N.W.	calm
12.7	15.8	14.4	14.2	11.3	9.7	6.8	9.2	5.8

Visibility in the Plate area is normally good; rain storms may temporarily affect it, but these are usually of short duration. Fog (visibility less than 1,000 m.) or mist (visibility 1/2,000 m.) occurs from April to October, with June showing the highest percentage of fogs (13%). North winds seem to favour the forming of fog, as these figures show.

Calm %fog	11	SE	12
N	24	S	6
NE	17	SW	0
E	5	W	3
		NW	13

Fog on the river forms by a cooling from below of warm air which drifts from E. or N.E., and is formed only when the temperature of the air is greater than that of the water. If the current augments its velocity, the fog lifts and visibility improves at sea level. Shore fogs usually affect only the coast and are of short duration.

Rain falls, on average, 92 days a year, with a total of 1,089 mm. yearly in Buenos Aires, spread evenly through the year with a high in January of 113 mm.

Humidity is high, on average 77% with 82% Winter, and 71% Summer months.

Electric storms are not frequent, and usually limited in extent.

Average yearly temperature is 16.6° C, in Summer 22.2°, Autumn 17.2°, Winter 11.2° and Spring 16°. Extremes correspond to January 43.3° (all-time high) and minus 5.6° in July.

ACTION OF THE WIND ON TIDES: In this large body of enclosed and shallow water winds up and down its axis raise or lower the water level very appreciably.

Cross winds in general have much less effect, and the inner and centre sections of the Plate show greater variations than the outer part. We show below a table as estimated by the Hydrographic Office, based on many years observations showing the variations, in cm., due to speed and direction of the winds. The values quoted must be applied to the astronomic tidal figures to arrive at a net level over datum.

Four new tide-gauges have been installed – two in Punta Indio Canal, at km. 99 and km. 180, and two up-river. Eventually four more will operate at Palermo, Banco Ortiz, Martin Garcia and Atalaya. Connected to the Hydrographic Office, the date will be incorporated into the regular tidal bulletins.

Table showing variations in river level according to force and direction of wind in the River Plate
expressed in centimetres.

	Kilometres/hour								
	10	20	30	40	50	60	70	80	sign
N.	18	30	39	48	60	72	84	96	minus
N.N.E.	9	21	30	36	45	57	69	81	minus
N.E.	3	6	9	24	39	57	69	81	minus
E.N.E.	3	6	9	12	18	33	42	51	plus
E.	6	12	24	36	48	60	72	84	plus
E.S.E.	9	24	39	57	69	81	93	105	plus
S.E.	21	39	57	72	87	102	114	126	plus
S.S.E.	30	45	66	81	96	114	132	150	plus
S.	18	36	57	66	78	99	108	120	plus
S.S.W.	12	24	39	48	57	69	78	87	plus
S.W.	9	12	18	24	33	52	51	60	minus
W.S.W.	6	12	18	30	39	51	60	69	minus
W.	9	15	27	36	45	54	63	72	minus
W.N.W.	12	21	30	36	45	54	66	78	minus
N.W.	12	21	33	39	48	60	69	78	minus
N.N.W.	15	24	36	45	54	63	75	87	minus

(source: Naval Hydrographic Service)

The tidal forecasts transmitted regularly over LRA (870 kc/s.), in telephony, in Spanish are, therefore, a combination of astronomical tide figures and meteorological influences on this basis.

Wind direction also affects the hours of the tide. In general, time of high water is not affected, but low water can be delayed or advanced by the wind force.

MITRE CANAL: The Canal runs some five miles offshore, starting from km. 12 in the access channel, and means a saving of some 30 miles for vessels going up river (or much more to the oil port of Campana), as well as the saving of time loss incurred in waiting for water depth to the Martin Garcia Bar.

Opposite San Fernando the canal enters the Parana de las Palmas branch of the Parana, through the "Las Viboras" Channel. From here on this arm of the river is deep enough to need nothing beyond the straightening of two or three sharp curves, to accommodate long vessels.

Logically, this does not guarantee 30 ft. draft up river at all times, the normal rise and fall of the river controls this, but during most of the year 30 ft. is obtainable to Rosario and San Lorenzo. In actual fact, the Parana River is tidal up to Rosario, and tides are felt all year round to Villa Constitucion, and in low water seasons, to Rosario itself. Passes between San Nicolas and Rosario also require constant attention, being at present only 22 ft.

Until the several sharp bends above Campana have been straightened length will be restricted to 200 m. o.a.l., by day only, with night navigation solely for vessels of 100 m. o.a.l. or less.

PARANA RIVER: Maximum drafts permitted up to km. 585 (Santa Fe) are governed by the Martin Garcia Bar, and must also, logically, take into account river conditions.

The River Parana rises in Brazil, and is formed by a junction of a number of rivers, the principal tributary being the Paraguay River.

It is a great river at all times, conveying an immense volume of water to the Atlantic. The Northern bank is comparatively high and rocky, the Southern bank low.

The stretch above Rosario is entirely riverlike in behaviour with an annual flood, rising and falling yearly. From Rosario to Martin Garcia Bar, where the river joins the Uruguay River to form the River Plate, there is also an annual flood, but this part is also influenced by the Plate tides. This section can be divided into two, from San Pedro to Villa Constitucion where the tidal fluctuations are always felt, and from Villa Constitucion to Rosario where the tide makes its influence felt only in periods of low water in the river.

Maximum depth in the river is normally reached in March and the low in September, but it is irregular in behaviour. There is a possibility that the series of dams being built in Brazil for hydroelectric purposes may eventually regularize the river by permitting some control over the seasonal increases.

When the river commences to fall, care must be taken in calculating loaded draft a few days ahead, as the official figures may be reduced one or more feet without warning.

HIGH AND LOW WATER: Maximum and minimum figures registered between Rosario and San Pedro in the last ten years.

		Jan.	*Feb.*	*Mch.*	*Apr.*	*May*	*Jun.*
High	Max.	32′	32′ 8″	33′ 7″	36′ 3″	37′ 9″	30′ 5″
	Min.	27′ 2″	29′ 2″	29′ 2″	28′ 7″	29′ 5″	25′ 3″
		Jul.	*Aug.*	*Sep.*	*Oct.*	*Nov.*	*Dec.*
High.	Max.	32′ 7″	28′ 2″	29′ 9″	31′ 5″	30′ 7″	31′ 4″
	Min.	25′ 5″	23′ 6″	22′ 8″	25′ 8″	26′ 6″	26′ 3″
		Jan.	*Feb.*	*Mch.*	*Apr.*	*May*	*Jun.*
Low	Max.	31′ 3″	31′ 4″	31′ 7″	33′ 7″	36′ 6″	29′ 9″
	Min.	24′ 2″	25′	27′ 2″	27′ 6″	26′ 3″	24′ 9″
		Jul.	*Aug.*	*Sep.*	*Oct.*	*Nov.*	*Dec.*
Low	Max.	29′ 9″	27′ 2″	25′ 6″	25′ 8″	30′	29′ 6″
	Min.	23′ 9″	21′ 8″	21′ 7″	23′ 3″	24′ 3″	24′ 3″

MAXIMUM DRAFT UP RIVER: When vessels by reason of their loaded draft have to complete loading at Buenos Aires or La Plata, they should never load deeper than two ft. less than the offical draft on the River Parana.

In the sector San Lorenzo/River Plate, when the height of the river is 4 ft. or more, one ft. must be calculated below keel depth; when the river is under 4 ft., two ft. clearance must be calculated.

In the sector Parana (Santa Fe)/San Lorenzo, when the height of the river on the hydrometer at Santa Fe is 5 ft 7 in. or more over zero, 2 ft. must be calculated under the keel with vessels of under 50 fiscal units, or 2 ft. 6 in. over that size. When the depth on the hydrometer is less than 5 ft. 7 in. (1.70 m.) then 2 ft. 6 in. and 3 ft. 6 in. respectively must be allowed.

These safety margins for the Parana/San Lorenzo/Santa Fe zone refer to river navigation; in access channels and ports a margin of one ft. is sufficient.

The references to river height refer respectively to Rosario and Santa Fe.

A falling or rising river will also be taken into account.

BRIDGES: A road and rail bridge is being built from Zarate (km. 107 on Parana de las Palmas) across the various islands and arms of the Parana to Brazo Largo (km. 180 on the Parana Bravo). The span on this arm of the river will be over 200 m. and clearance at high water 45 m. Until the bridge is officially opened, night-time navigation under it is prohibited.

A bridge from Resistencia (Capital of the Chaco Province) connects with Corrientes (Capital of Corrientes Province). This does not affect ocean shipping, beyond that going to Asuncion, and the clearance of the main span is 40 m. above high river level.

Two bridges are also under construction over the River Uruguay, one at Paysandu, which will not affect ocean shipping, and another at Puerto Unzue to Fray Bentos, in Uruguay. This latter will have a 220 m. span with 36 m. clearance above river level.

ATUCHA:

Situated on the left bank of the Parana de Las Palmas at km. 132, fifteen miles upstream from Zarate, and 135 miles by river from Buenos Aires.

BERTH: A small berth 33 m. long with two dolphins in 40 ft. built especially for the discharge of heavy material for the new Atomic Energy Plant. There is a 300 ton heavy lift crane on the concrete platform. The plant is now in full operation.

PORT AUTHORITIES: There are no port authorities here, and the port comes under the jurisdiction of Zarate.

BUENOS AIRES: 34.36 S. 58.22 W. (See Plan Book)

"A" category port

Refer to beginning of Argentina and River Plate Ports.

APPROACHES: Access is by the "Punta Indio" channel which requires constant dredging and commences just West of the Recalada Lightship, which is situated 30 km. due South of Montevideo. The channel with 28 ft. 6 ins. on a width of 200 m. or 23 ft. over 200 m. winds up to the Outer Roads, which are some 37 km. from the Port. Direct entrance is by a channel, dredged to 29 ft 6 ins. with a 50 m. width, and 28ft. 6 ins. on an 80 m. width, to within 10 km., where the channel divides into North Channel, serving the New Port and Madero Port berths, and South Channel, for the rest of the port. North Channel at present has a depth of 25 ft. 6 ins. with a width of 50 m. or 22 ft. with 80 m. width. South Channel has 23 ft. 6 ins. with a width of 35 m., or 21 ft. 6 ins. over 50 m. All depths given here and elsewhere refer to the zero of the Riachuelo tidal indicator and semaphore in Buenos Aires port, which practically corresponds to the level of the ordinary lowest water, and is marked 0.72 m. under the average medium level of tides. Tides average 3 ft., but the principal factor is that of wind, which can raise or lower the water by 5 ft. or more.

The Mitre Channel enters the access channel at Buoy 12, by the Inner Roads.

When large passenger liners or LASH vessels are entering or leaving, it is possible to have the access channel closed to all other traffic for a period of four hours on account of the narrowness of the dredged channel.

The fixed zero mark on the tidal indicator and semaphore is practically corresponding to the level of the ordinary lowest waters and is marked 0.72 m. under the average medium level of tides.

Vessels with draft of up to 32 ft. FW have proceeded safely through the main channel.

ROADS: The Outer Roads are between Buoys 25 and 36, according to draft. The Inner Roads are between Buoys 12 and 15. Intersection Pontoon, or Pilot station, is at Buoy 37, North side.

PORT: The port, which is artificial, comprises:

A. Puero Madero	North Basin, Docks 4, 3, 2, 1 and South Basin.
B. New Port	Basin A, B, C, D, E and F.
C. South Dock	First and Second sections.
D. Liquid Gas Basin	On the South side of the South Channel before reaching S. Dock
E. Inflammable Basin	On the South side of the South Channel between Liquid Gas Basin and South Dock.
F. East Basin	On the North side of the South Channel.

PUERTO MADERO: This is the oldest part of the Port. Ocean going vessels mainly operate in North Basin, and Docks 4 and 3.

A. Central Zone

North Basin. Built in the form of an irregular pentagon, with the entrance, 100 m. wide in one angle. The two piers at the entrance are 200 and 225 m. long, respectively. The West side is 390 m. long and the South 377 m., North 335 m., and with a depth presently 22 ft.

As the basin was built for a depth of 21 ft., and later dredged, when vessels load deeper than 20 ft. they should be careful to keep well off the quay wall to prevent grounding. Up to three vessels can discharge at anchor.

There are two dry docks in the basin, and a repair shop.

Usually only one berth, section 6, is used for loading/discharging operations, and sections 1 and 2 are used by vessels repairing or laid up, while sections 3 and 5 are for Navy use. The warehouse of section 7 is used by the Custom House.

Dock 4. Connected to North Basin by a lock 197 m. long, and 25 m. wide. The dock itself is 630 m. long and 160 m. wide, with 20 ft. water. This lock was originally fitted with lock gates, as was that from Dock 1 to South Basin, but these have not been used for many years. The bottom of the lock, between all the docks, is of concrete.

On the West side there are four warehouses, each 4 storeys high and twelve 3-ton cranes. Berths, or sections, numbered 1 to 4.

On the East side there are four two-storey warehouses and twenty-three 2.5-ton cranes. There are also several sheds behind and parallel with the warehouses which give on to the dock, sections numbered 5 to 8.

Between berths 6 and 7 on the East side there is a large open space where vessels or lighters can discharge direct to trucks or to railcars. Trucks may also go alongside at the other berths, at all of which there are railway lines, but space is limited.

The dock heads are used for discharging sand and gravel from barges.

Dock 3. South of Dock 4, connected by a cutting 70 m. long by 20 m. wide, with a swing-bridge. This dock is 690 m. long and 160 m. wide, depth also 20 ft.

On the West side, berths 1 to 5, there are four four-storey warehouses, and there are thirteen 3-ton cranes. There was a fifth warehouse at No. 3, burnt down and not rebuilt; this now forms part of the open space for general discharge and storage of imperishables.

On the East side, which is fitted with six 3-ton cranes, there are two elevators for grain. Unit three, with capacity for 6,000 tons in bulk and 1,200 tons in bags, fitted with 3 tubes and 3 chutes, can load 500 tons an hour bulk, or 160 bagged, by one spout only at a time. It is used for the smaller vessels in the trade with Brazil only. The other elevator in this Dock, No. 5, is used for storage.

Between the elevators, on the East side, there are open spaces where vessels may berth and discharge lumber or drummed cargo, but this section is limited to medium and small vessels only.

Dock 2. This is connected with Dock 3 by a cutting 60 m. long, and 20 m. wide, with a swing-bridge. The Dock is 570 m. long by 160 m. wide and 20 ft. deep at zero.

On the West side there are four berths, each with a warehouse, Nos. 1 and 4 being 3-storey, and 2 and 3, 4-storeys high. There are fifteen 3-ton cranes.

Section 1 is no longer used for the storage of dangerous or noxious cargoes, although Section 2 is in use for parcel storage.

The grain elevators on the East side of the dock are in a state of disuse. Their demolition is envisaged in order to provide an open storage area.

Dock 1. Connects with Dock 2 by a cutting 80 m. long, 20 m. wide, with 19 ft. This dock is chiefly used by Government-owned river craft. On the West side there are 5 warehouses, and 18 cranes. There are also ample open spaces. On the East side there is an elevator, capacity 27,000 tons in bulk, and three sheds between Docks 1 and 2, at about 300 m. from the quay.

At the southern end of this dock a hazardous and inflammable cargo store has been established, known as Shed 0 (zero).

South Basin. This basin is connected with Dock 1 by a lock 184 m. long by 20 m. wide, with a swing-bridge.

None of the lock gates in Docks 1 to 4 are used as water gates, water level is tidal, and the gates are simply means of communication. There are only gates proper into Dock 4 and Dock 1 from the North and South basins respectively. These have not been used for many years, although they were originally functional and formed one lock of all the docks.

The basin is 1,029 m. long and an average width of 110 m. It is used by river craft, cross river passenger ferry boats, coasters, etc. A new ferry boat terminal has been built here, on the land side of the basin, with waiting rooms, Customs section, etc.

B. New Port. The New Port, lies to the North of Puerto Madero, and entrance is via the Northern Channel. A breakwater extending from the North anteport protects the basin of the New Port from rough seas, and extends as far as Basin D, from which point another breakwater protects Basin E. Between the two, a channel is kept dredged for the movement of coasters to and from upriver. Basin F is entirely used for small coasters and river craft.

The five basins of this part (excluding F, coastal) offer good accommodation for the larger vessels entering Buenos Aires, and in all the berths there is sufficient water to float any vessel which can navigate the entrance channels.

Basins are numbered from South/North.

Basin A. Used by passenger vessels as well as general cargo. A landing station for passengers has recently been opened here and all vessels carrying over 50 passengers must land them here, shifting later to another berth if necessary.

The basin is 365 m. long by 140 m. wide, with 870 m. of wharfage. Northern side can accommodate two medium/large ships. Western side is frequently reserved for the Argentine Navy. On the S.W., passenger section, there is room for one vessel. On the S.E. another berth is available if the vessel operating at the Maritime Station is medium size only.

Pier head No. 1 is 100 m. long, but is mostly used as waiting berth for river going vessels. There are two railway lines on each side of the basin, and also at the back of the deposits. There are five warehouses and a total of 14 three-ton cranes.

Basin B. Used for general cargo vessels, and is 525 m. long on the North side, 464 m. on the South and 151 m. wide at the Western end, with 1,165 m. of wharfage with room for seven medium/large ships.

There are ten warehouses, and a total of 29 cranes, all three tons.

Pier head No. 2 is 202 m. long. There are three 3-ton cranes, and as a rule large passenger vessels occupy this berth after shifting from the passenger station.

Section 6 and 7 of this basin are reserved for the State Fleet vessels, or if used by others must be vacated if required by the national vessels.

Basin C. This is 495 m. long on the North, 585 m. on the South and 175 m. wide at its Western end, with 1,284 m. wharfage for seven medium/large vessels.

On the South side there are three warehouses, built 20 m. back from the quay to facilitate operations. There are thirteen 3-ton cranes.

On the North and West sides there are no sheds, and this is used for operating directly to or from trucks or rail cars.

There are seven 3-ton cranes on the North and three on the West side.

On Pier head No. 3 which is 236 m. long there are two 3-ton cranes and a 20-ton crane.

Railway tracks are fitted with a third rail for narrow gauge traffic.

The South side of this basin is reserved for ELMA (State Fleet) vessels.

Basin D: This is 495 m. long on the North, 585 m. on the South and 194 m. wide at its Western end, with 1,519 m. of wharfage.

Along the Southern side is the Grain Elevator, which occupies all the water front and extends also along Pier Head No. 4 — 295 m. Capacity is at present 150,000 tons, with another 20,000 being added. It can deliver 13,500 t.p.d. to a total of five vessels. On the North and Western sides, vessels may work to or from trucks for direct delivery cargo. There are nine 3 ton cranes on the North and three on the West, and also three cranes capacity 30 tons each.

On the North side a Container yard has been commenced, at present operating with 25,000 sq.m. of pavement and 1 shed, 100 m. long, 10 m. high and 30 m. wide. There are also two side loaders for 20/22 tons and one for 35 tons. Eventually the flooring will be extended to twice the area. 20 ft or 40 ft. Containers can be handled. The handling of Containers has become quicker.

A further warehouse completed at the end of 1976 for the storage of general cargo and containers.

For vessels with a reduced number of Containers, Basin E, North side, can also be employed, using the same concentration area at the so called Ericson yard.

Basin E: The basin is 495 m. long on the North side, 585 m. on the South and 194 m. at the West end, with a total length of 1,797 m. Coal is discharged on the North side and there is also a warehouse there for other cargoes, although basically this basin is used for coal.

On Pier Head No. 5, which is 523 m. long, the Power plant discharges its coal or oil. There is one oil intake and two travelling grabs, capacity 4 tons each, and also a 30 ton crane.

On the South side of this Basin vessels operate loading or unloading fruit and generals. On the N.W. Pier there is another generator plant of the Italo-Argentina de Electridad Co.

The South side of this dock is used by government vessels, but at its Eastern end, vessels may discharge liquid fuels. The Northern side has a store with 7,600 sq.m. of ground area. On the Western Head is a liquid product plant, (soda, tallow, vegetable oil etc.), although the berth is also used for general cargo.

Basin F: This faces North, and is used for river craft only, pusher barges and tugs, while on the land or West side there are discharging facilities for sand hoppers.

Pier Head No.6, between Basins E and F is 310 m. long, with room for one vessel only, and with two intakes for fuel oil and a 7.5 ton travelling grab for discharging Coal, capacity 150 t.p.h.

South Dock Zone.

This Dock is composed of two sections.

C. South Dock

First section. Has continuous quays on both sides, a width of 90 m. for most of its length, widening to a turning basin before reaching the connecting channel. The West quay is 911 m. long, and the East side is 1,109 m. long, both being used for general cargo and produce.

The refrigeration plants on the West side has now been demolished, and frozen meat is no longer shipped from this dock.

On the East side of the turning basin there is an elevator with capacity 6,500 tons, with four tubes and three chutes, and another storage shed capacity, 19,000 tons grain. Loading is only possible over one tube at a time rate 400 t.p.h. There are also tanks for edible oils here, pumping rate 150 t.p.h.

On the West side three 3-ton cranes and nine 1.5 ton cranes.

Second section. The connecting channel is 90 m. wide, with earth banks. Jetties for discharging petroleum are placed along the East side, while on the West there is a continuous quay 1,000 m. long, on which there are four 3-ton cranes and eight 1.5-ton cranes for discharging sand.

There are seven berths, five of which are for general use, one for the power plant for discharge of coal, with a 5-ton grab, which is now out of use, and one elevator berth, unit ten, capacity 23,500 tons. The loading bridge has five turrets, each with two tubes and one chute. Only one can load at a time, rate 400 t.p.h.

There are eight petroleum jetties on the East side for discharge of tankers and loading oil barges ex shore tanks. The jetties are marked A to H.

On reaching a draft of 23 ft. 6 in. vessels must shift to New Port.

D. Liquid Gas Basin. The Liquid Gas basin lies on the South side of the channel, immediately East from the Inflammables Basin, and consists of a central mooring platform 356 m. long, with four pairs of dolphins and two mooring blocks at each end, all joined by a foot gangway. The basin is protected from the S.E. by a breakwater 850 m. long, in the form of an inverted "L". The Gas lines are insulated to carry Liquid gas at minus 45°C.

Only two tankers are allowed to use the basin at a time.

As with the Inflammables Basin, all transit to land is by launch.

E. Inflammable Basin. This is situated outside the South Channel in front of km. 0.500 and about 300 m. distant from the axis of the Channel and at a right angle. The dimensions are as follows: length: 483 m. on the East side, 323 m. on the West side, 185 m. on the S.W. side and 72 m. on the South side. The dock walls at the entrance are 44 m. long on each side. The entrance is 50 m. wide. All the dock walls of this basin are of cement, as well as the intakes and landing dolphins. It has 6 intakes, 6 dolphins and 12 jetties for mooring vessels. The present tank storage in South Dock lies to the S.E. of this basin at a distance of about 1,000 m. The land lying between the South Dock and the Inflammables Basin is used for erecting tanks.

Ocean going tankers discharge at the piers on the West side. There are no facilities for reaching the city by land and therefore all the transport of officials, crew, stores, etc., must be done by launch.

The oil for the Y.P.F. tanks on the East side of the Basin and the M.O.P. workshops is sent from South Dock by piping under the South Channel.

F. East Basin. At the entrance to the South Anteport, a breakwater and two new basins have been constructed.

Basin No. 1 is used exclusively by the Port Works Department for laying up and repairing dredgers and other maintenance craft. It also contains a dry dock and a shipyard. Depth of water is 24 ft. in the basin but only 16 ft. at the entrance.

Basin No. 2, in form an irregular quadrilateral, is separated from No. 1 by a mole, and is 146 m. wide at the entrance, 170 at the base and with walls 372 m. long to the S.E. and 294 m. long to the West, allowing a number of vessels to berth. Alongside this mole is the SEGBA Power Plant. Depth in the basin varies from 24 ft. to 14 ft. at the entrance.

From No. 2 there is a mole parallel to the South Access channel, 260 m. long, with a central salient 120 m. long, and two side salients 15 m. long each, and at 55 m. from the central mole. This is used by tankers discharging fuel for the Power Plant. There is one crane, 16 tons, and a narrow gauge railway line.

The breakwater has been built on the South side of the access channel as a protection for the basins, and commences 100 m. South of the light buoy on km. 1 of this canal.

South Anteport. The construction of the Inflammables Basin, and of the East Basins, before arriving at the entrance to South Dock, Riachuelo or South Basin has created an Anteport. The North part has a mole 384 m. long from East Basin No. 1 to South Basin. This is used by the Port Works Department for workshops, deposits and offices.

The Prefecture has an office here, on top of which is a mast 2 m. high, used as a signal station. A white-edged red flag by day or a flashing red light by night indicates that a vessel is entering by the Southern Channel from km. 8 to the Anteport. This signal will remain until the vessel reaches the Anteport, and signifies that the Channel is closed to all except tugs, sand hoppers and river passenger craft, provided draft does not exceed 14 ft.

TUGS: From vessels drawing up to 22 ft., service is rendered by a bow tug from km. 5, and a stern tug from km. 1, or vice versa, and to or from kms. 8 and 4 respectively when draft exceeds 22 ft.

Stand-by time will be charged if a vessel is delayed in entering or leaving by bad weather, fog, low water, no berth, etc., plus usual Sunday/holiday surcharge.

Tug hours now coincide with ordinary port working hours and time is counted from the hour they leave their moorings and until they return.

When a vessel is leaving port, and tugs are ordered to accompany her beyond normal limits, an overcharge will be made on an hourly basis.

Once a vessel is moored, all further service in the same section will be charged by hour. If the vessel shifts section, this movement is charged plus the sections traversed.

A special compensation charge is made when tugs are ordered but not used.

For the services of tugs supplying electricity or steam, charges are made per day and per hour, varying with the size of the tug.

If vessels do not use their engines while under tow, a surcharge of 50% is made.

Tow ropes must be supplied by the vessel, but can also be hired. The towage company is not responsible for breakages, fouling of propeller, expenses of diver or any other consequence.

DENSITY: Fresh water.

FRESH WATER: There are hydrants at all berths, with very few exceptions, at which vessels can take water at a charge per cu.m.

There are no hydrants in the Inflammable Basin, and only at Berth No. 1 on either side of Basin E in the New Port.

Delivery rate varies from 5 to 10 tons per hour, depending on the number of vessels taking water, time of day, etc. An extra charge is made in overtime.

FUEL: Available, by barge.

CARGO: *Classification of import cargo.* Argentina being a tariff protected country, all cargo landed is subject to Customs control.

To facilitate control, there are Custom House Warehouses on the city side of the dock zone, on the quays, in the South Dock, and others away from the quays. The Dock Zone is enclosed.

The transport of all goods from vessels is currently effected by State owned vehicles. There are no longer any private wharehouses.

All fine cargo, cargo in cases, and most baled cargo must be discharged to Custom House Warehouses, direct from the ship, by means of dock cranes.

Other cargo in cases, barrels, etc., which might be damaged if stowed in the open air, also cargo which from its nature might damage other cargo stowed with it must go to the Custom House Warehouses away from the quays, and is conveyed there by port railway wagons that take the cargo from alongside the ship. This same class of cargo can also be sent to private fiscal warehouses and is similarly conveyed there from the ship's side by railway wagons.

Cargo that can be stowed in the open air without risk of damage, such as cases of glass, motor cars, sanitary ware, etc., is also conveyed from the ship's side by railway wagons to open spaces (plazoletas) within the dock zone, reserved for the stowage of such cargo.

Certain classes of cargo, such as bales of gunnies, jute, rice, agricultural implements, and all articles the nature of which can be seen at a glance, can be discharged direct to consignees' carts, motor lorries, etc., from the ship's tackle. Also certain classes of rough cargo, such as coal, lumber, iron, cement, etc., must be discharged direct in this way.

The Custom House, in order to expedite despatch, has enlarged the list of goods that can be discharged in this manner, and also authorises the carrying out of these operations outside ordinary working hours, which has hitherto been prohibited.

Storage of goods in Custom House Deposits is limited to six months, counting from the date of the vessel's entrance to port.

All classes of cargo can be discharged into lighters (by permit from the Custom House).

Discharge to lighters can take place in all sections of the port.

Use of special deposit called "Transit" for reception of general cargo.

In order to facilitate the discharge of vessels with general cargo for delivery to Fiscal Warehouse, the Custom House authorities have authorised the direct discharge from vessels to a special warehouse which receives all the cargo as it comes out of the hold, labour being supplied by Agents.

This facility is only available at certain sections of the port and whenever a vessel discharges at a berth where there is a "Transit" deposit, this must be used unless the vessel carried homogeneous cargo or of such a nature that it does not require the use of the "Transit" deposit.

The cargo discharged in these special warehouses must be delivered by the Agents at ship's expense, into the Customs warehouses.

Cargo in transit to or from Paraguay is now stored in sections of Warehouse No. 5 of Dock 4. The goods may remain in the warehouse, once onwards transportation has been arranged, for three days, where the ocean carrier is operating, or in a special shed in Section 1 of Dock 2, where the river vessels load for that country.

Cargo in transit for other countries can be deposited in any approved space. In all cases, special permit must be obtained in order not to lose the status of "transit cargo".

Time limit for the permanency of "In transit" cargo in lighters. Maximum time limit is set at ninety days, but it is possible to renew this, while on the expiry of such authorisation, the cargo must be discharged to fiscal warehouses, and be subject to all the rules and conditions governing this operation.

The Custom House is authorised to grant an extension of time when the interested party requests this before expiration date, and providing the causes are, in the opinion of the Custom House Authorities, justified.

Cargo in transit that is discharged by mistake to fiscal deposit, has to be removed from there within 48 hours; otherwise it must be added to the cargo manifest as a surplus discharge.

A tariff in the style of railway tariffs is in force with a variety of charges, all depending on the class and nature of the cargo that is being trans-shipped. Therefore, Shipowners, their Agents and Forwarding Agents should, in every case, communicate with their Agents in Buenos Aires to ascertain the exact cost of these charges. Subsequently to the new tariff being enforced, various increases were declared, so that the extra freight on cargo trans-shipped is now an important item to be considered when accepting through bookings.

Delivery of cargo. The receiver of the merchandise or holder of the Bill of Lading must deliver this document to the Custom House to clear the goods. The merchandise, whether for deposit of direct despatch is delivered to the Consignees without the intervention of the Master of the vessel or the Agents. The Bill of Lading remains with the Custom House, under whose control the cargo is delivered. The Custom House verifies the legitimacy of ownership, and whether all the import dues or services have been paid on the merchandise before leaving warehouse.

Collection of freights on imported goods. In the Argentine, the Custom House releases the cargo, and not the Agent, therefore the only means of ensuring collection of freight when payable at destination, is for the Agent to place a judicial embargo on the entire cargo. This action necessitates the Consignee first obtaining the Agent's conformity to the documents before the Custom House will accept them and deliver the goods.

Without an embargo the Agent, once he has presented the Cargo Manifest, cannot intervene between the Custom House and Consignee. Not even the retention by Shipper of all the signed original Bills of Lading is a safeguard, because the Custom House, which is only concerned with the delivery of the cargo to the lawful Owner and is in no way concerned with the freight payment, will deliver the cargo against production by consignee of a bank guarantee that the Bills of Lading will be forthcoming in due course.

From the foregoing it may be gathered that freight should always be prepaid when possible.

The Custom House usually does not release the cargo, if the Bills of Lading are claused "Payable at destination", until the importer produces an account for freight, duly receipted by the Agent, but this is not a sufficient cover, as the Customs are not under any legal obligation to effect this control, and therefore cannot be held responsible for the freight of goods delivered without it being paid.

Cargo discharged to or loaded from vehicles. The Custom House Administrator has authorised the access of vehicles of all classes to the quays of this port for the reception or delivery of cargo of any class, size or weight.

It is necessary for the importers, exporters or Custom House brokers to obtain a permit for this, and the applicant is held responsible for any damage to port installations caused by said vehicles. Sufficient space must be left between truck and sheds to allow passage of Port Authority vehicles and fire engines.

The authorities will not be responsible for any accidents to the vehicles, their crew or their cargo. The vehicles must be so handled as not to interfere with the railway traffic.

Discharge of Inflammables. This is now permitted in the Port of Buenos Aires under strict security control.

Discharge of Sulphur. It is compulsory to have a motor launch fire extinguisher alongside vessels during the discharge of sulphur. An extra man is also required at each hold for carrying water to the stevedores.

Delivery of fresh fruit. The Custom House allows the consignees of fresh fruit to take away their cargo immediately on vessel's arrival, upon presentation of a special permit endorsed by a bank and Agents, and whereby the receivers guarantee presentation of the Bill of Lading in due course.

Placing of Lighters between Vessel and Wharf. When lighters are placed between the vessel and the wharf for the convenience of discharging a vessel's hold, full Port Service Dues are charged.

Lighters may be placed between the vessel and the wharf when the vessel's work to shore is not interfered with thereby. In such cases the vessel will continue to pay full dues. Lighters are, in fact, not considered as occupying any berth unless they are allotted a special berth by the Custom House to load or discharge. It is only when lighters are so commissioned by the Custom House, that a vessel going alongside these lighters would be charged in the category of a vessel lying second off.

Discharge of Heavy Lifts. There are three floating cranes, one for lifts of up to 60 tons, another of 100 tons and a new one of 250 tons. The first two may have lost part of their capacity. The 250-ton crane can navigate carrying its cargo, so making special movement of the vessel unnecessary, but the two smaller cranes must operate between ship and shore in swivelling movement.

There is also a floating crane capacity 30 tons belonging to the Navy, and two others, each 75 tons capacity, belonging to the State Fleet.

Hire counts from getting the crane alongside, and in condition to work, until work is completed, plus an extra hour to compensate crews from getting the crane back to its mooring place. Slings must be supplied by the lessee, and no responsibility is accepted for damage or breakage, the charge being on a tonnage/hour basis.

The 250-ton crane is not self propelled, and has a length of 45 m., 23 m. beam and a draft of 5 m., displacing 1,400 tons. If required it can be used in salvage operations, towage being for account of lessee.

Normally these cranes, except for the 250-ton crane, navigate under their own power, but the Craneman has the right to employ a tug or tugs for lessee's account when he considers it necessary and two tugs are also generally employed.

Wharf Cranes. The hire of shore cranes is charged by the Port Administration to the Agents of the vessel requesting their use. Special permission must be obtained for overtime work, and also to have shore cranes handle ship's machinery, ballast, or any other non-commercial commodity.

Movable Cranes. Charged per hour from arrival until work finishes. These are used for shifting cargo from one wagon to another, or for shifting cargo for convenience of consignees.

Advertisements. Advices of arrival of vessels with cargo, inspections of general cargo and notices of general average are published in the local press.

Notarial Protest and extensions. When vessels arrive with cargo it is customary to note protest before a Public Notary, for which there are fixed fees per page to be filled in, plus further fees should an extension be necessary later.

TIDAL SIGNALS: The following tidal signals, shown from a semaphore on the North side of the entrance to South Basin Lat. 34° 38′ S. Long. 58° 21′ W. (approx.), indicate the height of the water above or below zero.

The signals are made with balls and black flags by day and with flashes by night as shown in the diagram below, seen from the Anteport looking out towards the river.

To indicate that no signals are being made at the semaphore, a flag is hoisted to the masthead, and another at the yard-arm.

SIGNALS BY DAY

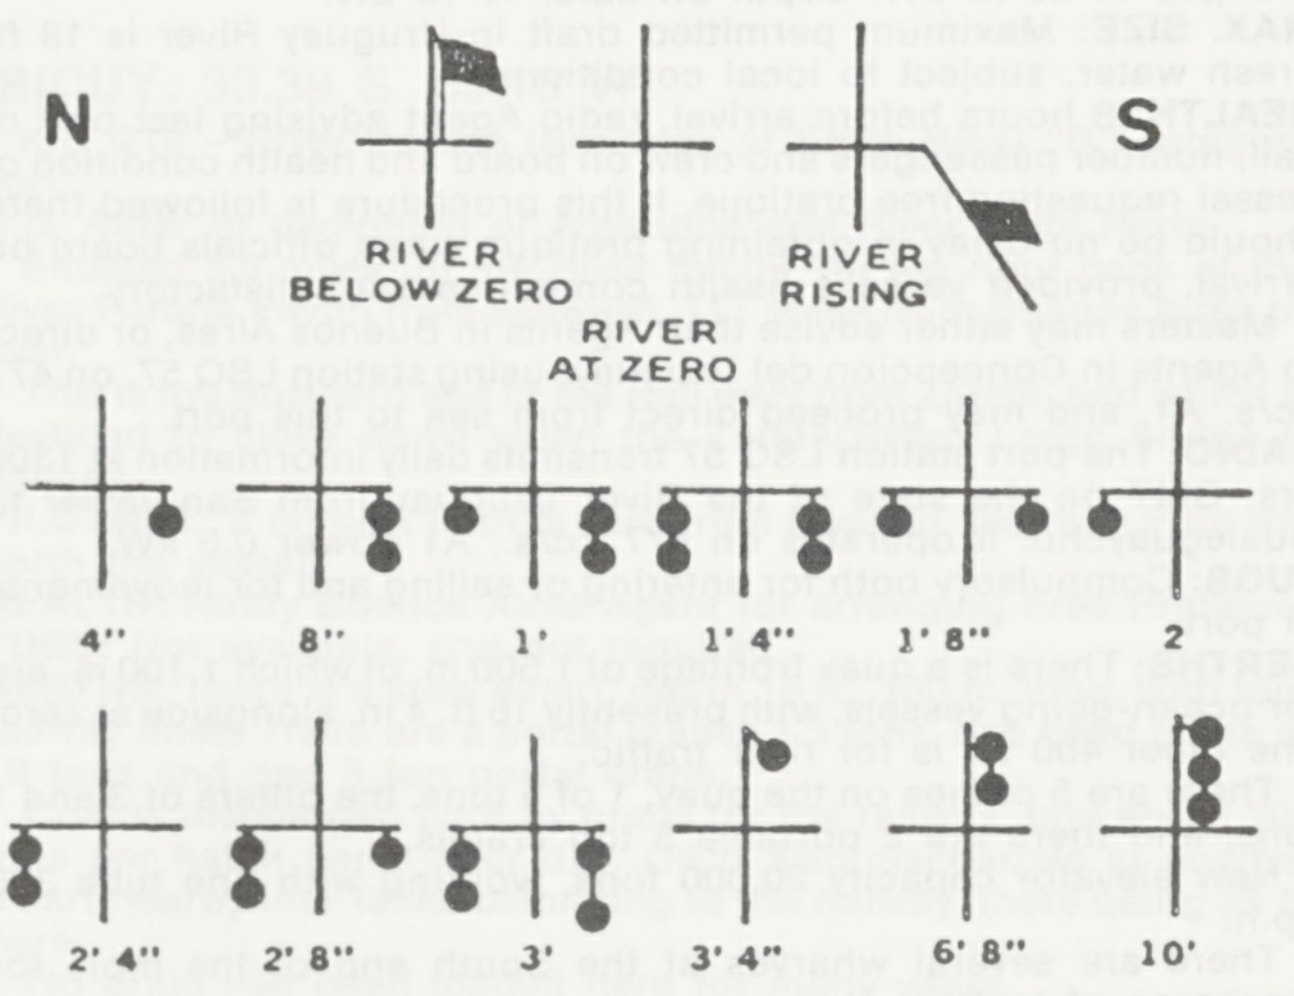

SIGNALS BY NIGHT

(White flash) Cycle:	30 seconds.
(Red flash) Long flash:	2.5 secs. each.
(Green flash) Short flash:	6/10 sec. each.
White flashes	Rising tide: One long.
	Falling tide: Two short.
	Above zero:
Red flashes	For each metre: One long.
	for each 10 centimetres: One short.
	Below zero:
Green flashes	For each metre: One long.
	For each 10 centimetres: One short.
	Zero:
Green and red flashes	One green and one red, both short.

A weekly bulletin is issued by the public works ministry and widely distributed among Pilots and Agents reports depths referred to the zero of the Riachuelo Indicator in channels, passages, basins and berths and it is possible to know the real depths at that moment in each part of the port area.

GENERAL: *Port Zone.* No one is permitted to enter the port zone on Sundays or holidays, or any working day after 1800 hrs., unless supplied with a pass. Visitors to ships must have cards issued by the Agents and approved by the authorities.

There are several access gates open during day time, but after working hours and on Saturdays/Sundays and holidays only those at Cangallo Street (by Dock 4) and Maipu (New Port) are open on a 24-hour basis.

Allotment of Berths. Vessels to discharge are allotted berths by the Port Authorities in strict turn, as from arrival in the roads, and according to the nature of the cargo to discharge or load and its quantity. A certain time is granted for completing operations, though an extension can usually be obtained, the Port Authority reserving the right to order a vessel out if operations are not completed on time.

Berths are allotted in South Dock when the greater part of a vessel's cargo is for the factories in that zone.

Berths at the Elevators. These are allotted in accordance with the certificate given by the National Grain Board, and in strict order of arrival in the roads.

Time limit for occupying berths and commencing operations. Vessels which do not commence operations within four hours of the first ordinary period, are liable to have the berth given to others. Similarly those which suspend operations without due cause may lose the berth.

ELMA berths in New Port. Any vessels may solicit one of the reserved berths, if vacant, but must shift as soon as a State vessel requires the berth.

Discharge of Inflammables. Consignees must take delivery from alongside. Should Customs clearance for such cargo not be ready, it must be discharged into lighters and the authorities will indicate where it must be placed.

Entrance. Vessels can enter or leave at any time of day or night, with advance notice to the authorities.

Movements. Vessels are not allowed to shift if their draft is not at least ten inches less than the depth of water on the semaphore, with a rising river. No vessel can interrupt the operations of another to shift within the port, but if ready to sail, the other vessel must facilitate its departure whatever the hour may be.

All vessels moored alongside one another, at the quay, must reciprocally facilitate their operations, and open out when the vessel on the inside finishes her operations, and must leave or change berth. They must also make room for lighters with cargo for the vessel next to the quay, outside working hours.

When a vessel has to shift along the quay up to one ship's length to discharge or load from another hatch, neither towage nor pilotage is necessary when the shift is between the forward hatches, or the after hatches. Prior permission must be obtained.

Shifting from North to South or vice versa. There is no set rule, but usually vessels going from say, South Dock to New Port, will let tugs go and sail out to Intersection Roads to turn round and take up tugs again in the North Channel. It is also possible to have tugs follow out to km. 9, where the North and South Channels meet, turn there and come into the new berth with the same tugs, if length of vessel permits.

It is for the Master and Pilot to decide where the vessel will turn, depending on weather, draft, current, etc.

Opening of Dock bridges. The established time table, twice an hour is not observed, and Agents arrange for this when a vessel is ready to move through. Vessels should not attempt to pass the lock gates if clearance is less than ten cm. and the river is not rising. It must be remembered that the sole of the locks in each case is of concrete.

It is frequent in Madero docks to see vessels resting on the soft muddy bottom.

Prefecture Control. On both entering and leaving the Prefecture officers may control with the crew list that all members of the crew are on board, particularly on sailing.

Draft on sailing must be checked by the Pilot and Master, and duly recorded in the Pilot's book. Load lines are strictly checked; in case of hogging, drafts fore and aft are taken while in sagging marks will prevail.

Shiftings and manoeuvres in port are carried out under the responsibility of the Master, but Pilots are also responsible, at least to the Prefecture, since they are under direct authority and at the same time considered assessors to the Prefecture.

Trim is also controlled, no list is allowed, and maximum tolerance for difference of draft fore and aft is 6 to 7 ft. according to vessel's length overall. Vessels should not be down by the head.

Hatchways. All hatches must be kept closed when a vessel is not working. If hatches are found open when a vessel is idle, the vessel is fined.

Garbage. A garbage barge goes round the port every morning to take away the garbage, which must be left in drums slung over the stern ready for lowering into the barge. It is also possible to arrange for a barge to take off refuse from holds, old dunnage, bedding, etc. Collection is often a rushed affair, and good watch must be kept for the barge. Fines are imposed if garbage is not removed.

Working Hours. Ordinary working hours are now fixed as from 0700 to 1300 and 1300 to 1900 hrs. Tugs are now also on this same time table.

Overtime can be worked from 1900 to 0100 hrs. and from 0100 to 0700 hrs., but Stevedores are not allowed to take two consecutive shifts.

Custom House guards and other official workers follow the same schedule from Monday to Friday, but earn overtime on Saturdays, Sundays and holidays.

TELEPHONE: There is no special installation for vessels in port. Many Agents have one or more lines of their own, which can be placed on board, if there are connections available in that sector. The telephone company makes a connecting charge each time, at a high cost to the vessel, plus the usual charges for the service.

CONSULS:

Algeria	Montevideo 1889	Tel. 41-0271
Australia	Sta. Fe 846	32-6841
Austria	French 3671	72-7095
Belgium	Defensa 113, 8th floor	33-0066
Bolivia	25 de Mayo 611 2nd floor	31-7365
Brazil	Paraquay 580 2nd Floor	31-7743
Bulgaria	Manuel Obarrio 2967	83-7458
Canada	Suipacha 1111 25th floor	32-9081
Czechoslovakia	F. Alcorta 3240	80-3917
Chile	San Martin 439 9th floor	49-8271
China, Peoples Rep.	Sucre 3001	73-1950
Colombia	Sta. Fe 782 8th Floor	31-4381
Corea-South	F. Alcorta 3221	83-4633
Costa Rica	Libertador 1146	42-6181
Cuba	Virrey del Pino 1810	73-4349
Denmark	L.N. Alem 1064 9th floor	32-6901
Dominica	Maipu 844 5th floor	392-2381
Ecuador	Quintana 585 10 Piso	42-6408
Egypt	Guido 1530	42-8542
El Salvador	Talcahuano 1038	42-6192
Finland	Sta. Fe 846	32-0600
France	Sta. Fe 846	32-2425
Germany, West	Maipu 938	32-9424
Great Britain	Luis Agote 2412	80-7070
Greece	R. S. Pena 547	34-2838
Guatemala	Lavalle 1759	46-4662
Haiti	Viamonte 1167	45-8796
Holland	Maipu 66 1st floor	34-8778
Honduras	Rodriguez Pena 336 2nd floor	40-0484
Hungary	Cnel. Diaz 1874	83-0767
Iceland	J. A. Roca 610 7th floor	34-3454
India	Paraguay 580 3rd floor	31-3020
Indonesia	Mariscal Castilla 2901	80-6622
Iran	Ocampo 2901	83-9314
Ireland	Sta. Fe 782 7th floor	32-4360
Israel	Arroyo 916	392-4481
Italy	M. T. Alvear 1149	42-9841
Jamaica	Corrientes 127 4th floor	31-4872
Japan	Azcuenaga 1035	83-1031
Lebanon	Lib. Gral. Sn Martin 2354	821-0466
Liberia	Florida 142	49-5543
Mexico	Cordoba 1367	42-0723
Nicaragua	Venezuela 146 2nd floor	37-8375
Norway	Esmeralda 909 3rd floor	32-1904
Pakistan	Alvear 1402	44-0355
Panama	Talcahuano 1038 5th floor	42-9651
Paraguay	Maipu 464 3rd floor	392-6536
Peru	Corrientes 330 3rd floor	31-3374
Philippines	Castex 3123	80-5068
Poland	Av. M. Aguado 2870	821-9681
Portugal	Cordoba 315 3rd floor	32-3524
Rumania	Arroyo 962	392-2630
Sierra Leone	Cordoba 1233	40-9573
South Africa	M. T. Alvear 590	31-8991
Spain	Guido 1760	41-0078
Sweden	Tacuari 147	38-3001
Switzerland	Sta. Fe 846	31-6941
Syria	Callao 956	42-2113
Thailand	Av. Belgrano 265 9th floor	33-3690
Turkey	R. S. Pena 852 8th floor	46-8779
U.S.S.R.	R. Pena 1741	42-1552
Uruguay	Corrientes 545 6th floor	49-4129
U.S.A.	Sarmiento 669 3rd floor	46-3211
Venezuela	Esmeralda 909 4th floor	32-2786
Vietnam	Cordoba 1184	46-6533
Yugoslavia	R. Pena 1012	411309
Zaire	Cerrito 1070	44-0902

In Out-ports, the available Consular representations are stated under each port.

AUTHORITY: Administrador del Puerto Buenos Aires.

CAMPANA: 35.15 S. 58.58 W. (See Plan Book)

(Province of Buenos Aires) "B" category port.

N.B. Refer to beginning of Argentina I and River Plate Ports.

On the left bank of the Parana de las Palmas arm of the Delta from seaward, 155 miles by river from Buenos Aires. The only pass which obstructs navigation is the Martin Garcia.

The port is mainly used for receiving and despatching petroleum and its products. There are also facilities for handling timber and general cargo, as well as steel tubes for the petroleum industry, both for internal requirements and for export, which are made here.

RESTRICTIONS: Draft is controlled by depth of water at Martin Garcia Bar. Daily draft forecasts made by local authorities. See "Mitre Channel" (Under, The River Plate).

MAX. SIZE: Up to 27 ft. draft, dependent on local river conditions.

HEALTH: Free Pratique can be obtained in the usual way, by notifying Buenos Aires Agents. Tankers lightening part of their cargo in Buenos Aires Roads, can take pratique here, provided that the convoy formed by the tanker and barges follows up to Campana, and no one on board has any contact with shore until after the medical visit. If the vessel is "unclean" however, pratique is taken before lightening.

TUGS: Not required.

BERTHS: From North to South the berths are:

National Mole. 20 ft. alongside, used for shipment of the steel tubes and movement in general. The mole is 116 m. long, with three electric cranes, 4 ton capacity and two mobile cranes.

Esso Mole H. Concrete pierhead, 16 m. long, over which crude oil is discharged through an 8 in. line. there is deep water at this mole which is mainly used for import cargo. There is also a belt conveyor equipment for loading petroleum coke in bulk.

Esso Mole G. A mile South of Mole H, fitted with an 8 in. line for discharge of crude from smaller tankers, in 18 ft. Length 14 m.

Esso Mole E. 130 m. long, with 24 ft. There are two intakes on this mole, of 6 in. the former being used for shipments of clean products and the latter both for crude and for shipment of clean products.

Esso Mole F. In 26 ft., 16 m. long, with a 10 in. line which can be used crude and for lubricants.

200 m. downstream there is a wharf, 70 m. long, in 14 ft. used for discharge of timber and sand.

There are no facilities for handling of grain or other produce.

MEDICAL: Doctors and hospital available.

DENSITY: Fresh water.

FRESH WATER: Available at Esso Moles and National Mole.

FUEL: Available at Esso berths. No barges.

CONSULS: At Rosario and Buenos Aires.

REPAIRS: Can be effected.

AUTHORITY: Administracion de los Puertos Parana.

CONCEPCION DEL URUGUAY: 32.29 S. 58.12 W. (See Plan Book)

Km. 183 – River Uruguay (Province of Entre Rios) "B" category port.

N.B. Refer to beginning of Argentina and River Plate Ports.

On the left bank of the River Uruguay from seaward, 182 miles from Buenos Aires.

APPROACHES: Access to the port is by a channel 1,000 m. long, 45 m. wide, which is now only 11 ft. 5 in. at zero.

The roads of the port extend from the buoy marking the entrance to the channel, and about 2 km. up river, where vessels may anchor if awaiting berth.

Access is governed by the water on the Montana and Altos y Bajos passes, where there is normally no more than 17 ft. and this draft should be taken as a determining factor.

PILOTAGE: Pilots for Uruguay River board off Buenos Aires entry channel.

ANCHORAGE: In Uruguay River, about 900 m. North of entry channel buoy.

RESTRICTIONS: Day and night navigation allowed. Channel dredged to 20 ft. LW. Depth on bars, 17 ft. LW.

MAX. SIZE: Maximum permitted draft in Uruguay River is 18 ft. Fresh water, subject to local conditions.

HEALTH: 8 hours before arrival, radio Agent advising last port of call, number passengers and crew on board and health condition of vessel requesting free pratique. If this procedure is followed there should be no delay in obtaining pratique when officials board on arrival, provided vessel's health conditions are satisfactory.

Masters may either advise their Agents in Buenos Aires, or direct to Agents in Concepcion del Uruguay, using station LSQ 57, on 477 kc/s. A1, and may proceed direct from sea to this port.

RADIO: The port station LSQ 57 transmits daily information at 1300 hrs. GMT on the state of the River Uruguay from San Javier to Gualeguaychu. It operates on 477 kc/s., A1 power 0.5 kW.

TUGS: Compulsory both for entering or sailing and for movements in port.

BERTHS: There is a quay frontage of 1,500 m. of which 1,100 m. are for ocean-going vessels, with presently 16 ft. 4 in. alongside at zero. The other 400 m. is for river traffic.

There are 5 cranes on the quay, 1 of 5 tons, the others of 3 and 1 tons, and there are 2 portable 5 ton cranes.

New elevator capacity 20,000 tons, working with one tube 300 t.p.h.

There are several wharves at the South end of the mole for discharge of tankers.

Due to silting alongside quay, vessel should be prepared to be fendered about 1.5 m. off the quay.

MEDICAL: All medical facilities available.

TANKERS: Two berths for tankers up to 18 ft. draft.

YPF Berth: Eight hose connections, 12 in. and 6 in. diameter.

Esso Berth: Hose connections, 8 in. for naphtha, 6 in. for other products.

DENSITY: Fresh water.

FRESH WATER: Available, there are several hydrants of 1.5 in. diameter on the mole.

FUEL: Available from the State Oil Company at the pier, or by drums from other suppliers.

REPAIRS: National and privately owned workshops for all types of minor repairs.

DRY DOCKS: One, owned by Ministerio de Obras Publicas, length 70 m.

REPATRIATION: Can be arranged subject to Immigration formalities.

AIRPORT: Situated 3 km. away, with daily services to Buenos Aires.

CONSULS: There are Italian, French, Spanish and Uruguayan representatives.

POLICE/AMBULANCE/FIRE: Police tel. 2222; Fire Service tel. 2860; Ambulance tel. 1792; Hospital tel. 2464.

TELEPHONES: Arrangements can be made for placing telephone on board.

SHORE LEAVE: Permitted subject to Immigration control.

AUTHORITY: Capitania del Puerto Concepcion del Uruguay.

DIAMANTE: 32.05 S. 60.33 W. (See Plan Book)

Km. 533 – River Parana (Province of Entra Rios) "B" category port.

N.B. Refer to beginning of Argentina and River Plate Ports.

On the right bank of the River Parana from seaward, above Rosario and 286 miles by river from Buenos Aires.

APPROACHES: There is ample depth of water in the port and approaches, which is governed by the water on the various bars on the river, the shallowest above Rosario being Isla de los Pajaros, at km. 468 to km. 473.

PILOTAGE: There is no resident port Pilot, and Pilot has to be ordered from Rosario. Minimum 10 hours notice required. The river Pilot ends his duties in the outer roads.

HEALTH: Vessels arriving directly from abroad must take Free Pratique at San Nicolas or Rosario, with the usual pre-advice to Agents there, which is essential for preparation of Notice of Readiness.

RADIO: Nearest station is Rosario LSQ 38, on 477 kc/s. A1 LSQ broadcasts daily, at 1305 hrs., the depth of water in the Parana River from Los Ratones to Los Pajaros, and also the minimum depth between Santa Fe and Rosario.

TUGS: None available locally, but one tug is required on sailing from the new elevator berth and has to be ordered from Santa Fe.

BERTHS: Grain is loaded from the new elevator at the North end of the port, section 4, where there is 30 ft. Only one vessel may load at a time. Loading rate is up to 600 tons per tube per hour, work being possible with two tubes simultaneously.

It is possible to load a second vessel, lying second off, if the beam of the vessel alongside permits.

Storage capacity in port is about 50,000 tons, of which 20,000 tons are in elevator at section 4.

There are tanks for Vegetable Oil with a capacity of 4,000 tons. Pumping rate is about 120 t.p.h. to vessels' tanks.

FRESH WATER: Available at the new elevator berth.

FUEL: Not available.

REPAIRS: Only minor repairs possible.

DENSITY: Fresh water.

MEDICAL: Hospital available.

CONSULS: None. Outward bound consulate despatches should be requested from Rosario or Buenos Aires.

IBICUY: 33.39 S. 59.15 W.

Km. 218 – River Parana (Province of Entre Rios) "B" category port.

N.B. Refer to beginning of Argentina and River Plate Ports.

Situated 3.5 miles up the River Ibicuy, on the right bank of the River Parana Pavon from seaward, 117 miles from Buenos Aires by river.

This is the Northern end of the Rail ferry from Zarate, and which is destined to close down when the Zarate/Brazo Largo bridge is opened.

PILOTAGE: If no port Pilot is sent from Rosario, the river Pilot will berth the vessel.

HEALTH: Notify Buenos Aires Agent for arranging Free Pratique.

TUGS: Not available, and not required.

BERTHS: There is a steel wharf, depth 18 ft., 160 m. long, with four railway lines. There are 2 portal cranes 1.5 tons, one fixed crane of 10 tons and one 5 ton portal crane.

Coal is discharged here by grabs for the railway, rate about 200 tons per hatch per 8-hour day. Oil is also discharged at another wharf nearby into tanks belonging to the railway, there being 25 ft. here.

No grain has been loaded here for many years.

MEDICAL: Facilities available.

DENSITY: Fresh water.

FUEL: Not available.

FRESH WATER: Available on the quay; the railway provides hose, delivery rate 60 t.p.d.

REPAIRS: Not available.

CONSULS: None, clearance must be made at Buenos Aires.

LA PLATA: 34.54 S. 57.55 W. (See Plan Book)

(Province of Buenos Aires) "B" category port.

N.B. Refer to beginning of Argentina and River Plate ports.

This port is situated on the left bank of the estuary of the River Plate from seaward, 30 miles South of Buenos Aires. It is the capital of the Province of Buenos Aires and is rapidly becoming industrialised.

APPROACHES: Access to the port is by a channel, which leaves the main entrance channel to Buenos Aires at km. 57. This is constantly dredged, being usually at 28 ft. maximum. La Plata Roads extend for 3.5 miles from the moles.

PILOTAGE: Coming from the sea, or Montevideo, the Recalada or Uruguayan pilot will take the vessel to La Plata Roads 27 ft. where a La Plata port Pilot comes aboard.

From up river to La Plata, the river Pilot is dropped at Intersection, where a new Pilot takes the vessel to La Plata Roads for the Port Pilot to come aboard.

RESTRICTIONS: Vessels navigating in the entrance channel have preference over those in the River Santiago, and those which by reason of size must turn at Four Mouths have priority over others in their vicinity.

There must be no crossing or overtaking of vessels over 75 m. long or 11 m. beam, or 20 ft. draft and for this reason vessels ready to sail from Gran Dock will not let go while any vessel is entering by the entrance channel.

Vessels over 200 m. in length can only manoeuvre in daytime, with a minimum visibility of 1,000 m. and with a wind not exceeding 10 knots.

On entering or sailing on a rising tide minimum depth cannot exceed vessels draft, and on a falling tide there must be 50 cm. (1 ft. 8 in.) under the keel.

Regulations for the Santiago River Channel prohibit movement between sunset and sunrise for vessels over 140 m. long, or drawing over 24 ft. Vessels over 11 m. beam cannot cross or overtake, and vessels in this channel must not interfere with those moving in Four Mouths.

ANCHORAGE: Four miles S.E. of Recalada. The Navy controls a reserved zone between 34° 46′ and 44° 48′ S. and between the meridian 57° 48′ W. and a true bearing 220 from the buoy km. 7,700 at the end of the Eastern arm of the port, for Naval ships only.

MAX. SIZE: Regulations limit length, beam and draft to 215 m., 30 m. and 9.15 m. (30 ft.) respectively.

HEALTH: Free Pratique — radio messages should be sent direct to Agents in La Plata if vessel is entering direct.

RADIO: Station LOM 524 kc/s., A2. State oilfields have a VHF service, range 50 km. for communication with their vessels on 156.5 Mc/s. during the first 15 minutes of each hour.

TUGS: Two tugs must be used, each of a minimum 820 h.p. Normally join vessel in entrance channel.

BERTHS: The port comprises Rio Santiago, Gran Dock and the Propulsora berth, five km. up the river Santiago, also known as Port Ingeniero Rocca.

Rio Santiago: The grain elevators on the West side of the entrance channel are no longer in use, and their installations would require considerable repair. This berth is 450 m. long, due West of the Four Mouths turning basin. Four tanks for reception of liquid chemicals have been installed here, capacity 2,300 tons.

There are no fixed cranes at the berths, but a number of mobile units are in use. No lighters are available, unless brought from Buenos Aires.

Of the two Packing plants, one, Armour, is completely closed down and would need considerable repair to re-open. The other, Swift, is operating at less than capacity, for local demand, and any export Meat is trucked to Buenos Aires for shipment.

Gran Dock: Seventeen berths, depth 26 ft. alongside.

Propulsora: A cold rolling steel mill has been built inland and a 5-km. channel dredged to 30 ft. from "Cuatro Bocas". There is one berth here, 154 m. long, though vessels of up to 205 m. l.o.a. have operated here. The material used in the mill is imported in coils, and exports of cold rolled sheets and wire are also handled. There is one crane, 30 ton capacity and rate of discharge can reach 3,000 tons per 24-hour day.

Some 600 m. from the wharf itself, there is a turning basin 300 m. diameter. Vessels go in bow first, as there is less water to the South end of the wharf, and turn in this basin before returning down channel to La Plata proper. Only one vessel can operate at a time here. Vessels are secured to bollards on shore at the bow, and a mooring buoy astern.

TANKERS: Four tanker berths in Gran Dock, which are used exclusively for YPF. No facilities for slop discharge:

YPF Terminal handles crude oil, diesel, kerosene. Bunkers available ex-wharf.

Gran Dock is now used only for tankers by the National Oilfields. The turning basin at the South end being only 180 m. in diameter is sufficient for the larger vessels now operating here, and a new turning basin at Cuatro Bocas or Four Mouths, is dredged to 30 ft.

on a 400 m. diameter. This is at the junction of the access channel, River Santiago, and Gran Dock. Tankers head in to Gran Dock and reverse back to this basin.

In the 11 berths the intakes include one 24 in. line, and several of 16 in., 14 in. and 12 in.

In the West Channel, behind Gran Dock, there is one berth for liquid gas tankers, with a 12 in. line, with several discharge manifolds at 4 in.

Special regulations for Gran Dock permit vessels to moor with bows either inwards or outwards, indiscriminately. Those moored bows inwards (facing South) will be assigned, preferably to intakes 4, 5, 10 and 11, and must sail immediately after finishing operations, taking preference over others about to sail.

Vessels between 175 and 215 m. length, or drawing 22 ft. or more can navigate ahead or astern, and will turn in Four Mouths on entering or sailing as the case may be. When such vessels are moving stern first, the Prefecture will make sure that there are no craft of more than 5 m. beam moored on either side of the Armour Freezer, shifting these if necessary.

Vessels of less than 175 m. length or with a draft of less than 22 ft. must turn in the Turning Basin on entering or sailing.

Turbine steamers of over 140 m. in length will only use the Turning Basin in daylight.

For safety reasons there must be one tug and one fire-fighting craft on service and ready to sail.

No mooring second off is permitted except for tugs and vessels receiving dirty ballast or liquid from cleansing of tanks, or when supplying steam.

Degassing tanks is prohibited in port.

Heated repairs can only be carried out under deck and on special authorization from authorities.

MOORING: Vessels of up to 150 m. length will employ four men for mooring, and those over 150 m., six men. Mooring hours in ordinary time are from 0600/1800 hrs. on week days, 0600/1200 hrs. on Saturdays. There is a 50% extra from 1800/2400 hrs. on week days or from 1200/1800 hrs. Saturdays, and 100% at all other times.

SEMAPHORE: For night signalling of the depth of water in the access channel, the system is analogous to that at Martin Garcia and Riachuelo, Buenos Aires. By day signals are hoisted on a tower at km. 4,460 on the access channel arm if tide is rising. If the river is stationary or falling, no flag is hoisted.

MEDICAL: Doctors and hospital facilities available.

FRESH WATER: Delivery by barge, capacity 300 tons and pumping with barge's own pump, 100 t.p.h. There are also connections at the berth.

FUEL: Obtainable from YPF terminal. No barges available.

REPAIRS: All repairs can be effected except those requiring a dry dock.

CONSULS: Following countries are represented in La Plata: Belgium, Brazil, Great Britain, Italy, Norway and Spain. All other consuls at Buenos Aires.

SHORE LEAVE: Allowed, provided crew members in possession of Identification Cards.

AUTHORITY: Capitan de Puerto de La Plata.

RAMALLO: 33.32 S. 59.59 W. (See Plan Book)

Km. 326 – River Parana (Province of Buenos Aires) "B" category port.

N.B. Refer to beginning of Argentina and River Plate Ports.

APPROACHES: The port is on the left bank of the Parana from seaward, where the river is divided into two by the Isal de las Hermanas. Traffic up river normally keeps to the starboard channel at this point, or the port when downstream and the entrance into Ramallo, although buoyed, is not lighted. No depths are given for the access but as a guide, when the main channel of the Parana is at say 24 ft., then vessels can safely load to 18 ft. in Ramallo. However, with the building of a new elevator, 20,000 tons capacity to replace that damaged some years back, movement has recommenced and the River Bulletin publishes 21 ft. for the elevator mole, and 24 ft. 6 in. for the hardboard mole. Nevertheless, it is advisable to check on access depths.

PILOTAGE: According to the Maritime Digest, port Pilot must bring the vessel in from the main channel, and take her out there again, a distance of 5 miles. The Roads are technically in the main Parana, but it is usual to anchor 150 m. off the wharves.

BERTHS: Apart from two damaged moles, out of use, there are, from South/North:

Grain Board Mole. There is an elevator, capacity 12,000 tons and two loading belts, load rate 250/300 t.p.h. each. The berth, for one vessel not over 145 m. length, consists of a small jetty and several dolphins and two mooring buoys.

National Mole. Concrete wharf 100 m. long, with three sheds on it, used by sand hoppers, and by river craft.

Fiplasto Mole. Used for discharge of fuel to the hardboard factory, from tankers. There are two dolphins with 24 ft. 6 in. water. As the current runs fast here, vessels may roll with any wind, and it is recommended to put out more ropes than usual, both fore and aft.

RADIO: Agents at San Nicolas must be contacted either through Buenos Aires Radio, or via Rosario, LSQ 38, on 477 kc/s. A 1.

TUGS: None required; in case of need they could be brought from Villa Constitucion.

FUEL: Not available.

FRESH WATER: Not available, except by drums from a tank on the National Mole.

MEDICAL: Attention available, but no hospital.

CONSULS: None; consular clearances can be effected at San Nicolas.

ROSARIO: 32.57 S. 60.33 W. (See Plan Book)

Km. 420 – River Parana (Province of Santa Fe) "B" category port.

N.B. Refer to beginning of Argentina and River Plate Ports.

APPROACHES: Outer Roads, between buoys 410 and 413.

PILOTAGE: The port Pilot will come on board off km. 411, by launch. Vessel should whistle for him if not here to meet the ship (2 long, 1 short).

ANCHORAGES: Between kilometres 410 and 413. Both anchors should be used.

RESTRICTIONS: *Fog.* In thick fog, special permit must be obtained to enter or leave. There is an average of 6 days fog per month in the period April/August but only 1 day per month in the rest of the year. Electric storms are frequent.

Maximum speed in Zone. From Saladillo stream North, there is a limit of 6 knots, up to Punta Barrancas.

There are no restrictions as to length and breadth of vessels, but draft and size of vessels are subject to river depth, which is very variable and no standard information can be given. Vessels up to 27 ft. draft are permitted to navigate the River Parana up to Rosario and San Lorenzo, provided vessels speed exceeds 10 knots and that there is at least 1 ft. keel clearance. Above Rosario controlling depth 22 ft. Vessels loading in Parana Ports must keep close contact with Agents for daily forecasts of admissible draft crossing Martin-Garcia Bar to avoid risk of overloading and consequent delays.

HEALTH: Free Pratique, use Radio LSQ 38, on 477 kc/s., or via Buenos Aires radio.

TUGS: Two tugs are available, controlled by Port Authority. However tugs are not normally required for berthing or unberthing.

RADIO: All messages through Pacheco Radio, call sign LPD, operating on 425 kHz. Pilots equipped with VHF radio Channel 16.

BERTHING: Alongside quays. There are seven elevators with the rate of loading up to 300 t.p.h. of grain. Also there are 4 warehouses for loading light grains or seed. Between these closed sheds are paved spaces which are used for delivery of cargo to road vehicles and vice versa.

Montserrat Wharf. Used by river craft only.

Unit I. Of the 4 jetties, only Nos. 1 and 2 are in use, and can deliver 170 tons of grain per hour each, accommodating one vessel in 21 ft.

Refineria Argentina Mole. In use for discharge of fuel oil only.

Unit II. Only 1 berth in 24 ft. 9 in. with 2 spouts, 200 t.p.h. each or 125 tons by-products.

Unit III. Known previously as Unit IV, can work with 2 tubes, 250 tons each, berth for 1 vessel only. The space between Units II and III is now out of use.

Unit IV. This is still under repair, a belt joining the 3 sheds previously known as Units 5, 6 and 7 is being installed. Eventually there will be 2 loading tubes and berth for 1 vessel.

Old Unit No. 8 has been dismantled and taken to Victoria.

Deposits 3 to 30. These still exist, but the area 3 to 17, originally allotted to Bolivia for use as a Free Zone, has now been replaced by the transfer of sheds 23 to 30 to the Bolivian zone.

In June, 1976 only sheds 23/4 and 25 had been readied for Bolivia, using a frontage of 342 m., with 3 portal cranes. The final transfers will be for a total of 54,667 sq.m., against the present 17,300 sq.m. and a frontage to the river of 998 m. There is no indication as to when this longstanding agreement will be fulfilled, and in the meantime, the area of sheds 3 to 17 is being used for transhipping cargo to Paraguay.

Sheds 29/30 have been rented, and the wharf being used in breaking up the navy aircraft carrier.

Unit V. Is the Old Unit X, renumbered. Two vessels can berth here and there are 2 spouts workable per vessel at 200 t.p.h. each spout.

What was Unit XI is now rented for the storage of oilseeds, and Unit XII has been dismantled. Vessels can berth here to load Wharf Offals.

New Pier. At this point the new pier, 616 m. long, has been finished, though with no cranes installed as yet, lines being in place for the expected portal cranes. Neither are there any sheds and for the moment the wharf is used for loading expellers, ex truck, over portable conveyors. There is a 30 m. gap between the South end of the wharf and Unit VI, with a slight change in line of the river front. Immediately behind this a larger basin is being dredged, to 30 ft. which will add 4,250 m. of new quay frontage to the port. It is intended to centralise here the movement in fuels, coal, gravel, sand, etc., and to use it for discharge of grain barges which now form a large part of the pusher trains in use on the river, and which have materially changed the type of river transport. Dredging of the basin itself is well advanced. Work on an 80,000 ton elevator at the South end of the 616 m. wharf has commenced, to load either to the river side or into the new basin berths, to the West.

Unit VI. The South Elevator, previously numbered XIII, now has 29 ft. at zero, and can handle 2 vessels, if both under 150 m., or one if over that length. Load rate is 1,200 t.p.h per berth, over 3 tubes to each vessel, or 5 tubes if to 1 vessel only (2,000 t.p.h.). Storage capacity is 125,000 tons. A further 360,000 tons storage capacity in the underground deposits in the cliffs on the far side of the future river basin will eventually be connected to Unit VI. At present their cargo is shifted to truck or rail.

Immediately South of the existing elevator a new 80,000 ton elevator is under construction, and which will form part of the Unit

VI complex, which will then have 6 berths to the river front, and possibly others to the river basin.

The former Shell petrol storage tanks, behind the elevator, are now used for vegetable oils. There are 4 tanks, capacity 800 tons each, connected to a line loading 100 t.p.h. at Unit VI.

Entrance to the future river basin will be South of the extended Unit VI, and to the North of the Meat packing plant and cattle ramp, while South of this a shipbuilding yard is under study. The pier at the packing plant is 175 m. long.

The port zone proper ends at Saladillo stream, on the South side of which the Swift Meat Packing plant has a pier, 175 m. long, for the loading of its products. There is also a line here for loading vegetable oils in bulk, capacity 100 t.p.h.

The projected basin will have its entrance between the Inflammables zone and the Cattle berth, and South of the Cattle berth a shipbuilding yard is projected.

Cranes. There are a large number of electric cranes, and the port is built in such a way that with few exceptions all cargo discharged must be handled by shore cranes. If the river is high, and shore cranes cannot operate to the vessel, the ship may discharge to shore, for the shore crane to place on railway cars, etc.

Bills of Lading covering lifts of 2.5 tons or more should be claused in such a manner that any extra expense in landing them is for account of the cargo.

Floating cranes. There are two, 90 and 50 tons.

Allotment of berths. May depend on the availability of grain to the particular shipper, but normally berths are allotted in order of arrival. Loading on second tier is not customary now, as the capacity of the port is such it is not necessary.

Fenders. Vessels must use fenders for keeping them off, and can use their own or hire from the port.

Ashes, etc. Arrangements can be made with Agents for daily removal.

STEVEDORES: Gangs supplied according to vessels requirements by private companies under Government supervision.

Normal capacity per gang, per shift:
20 to 25 t.p.h. frozen meat.
120 to 140 tons per shift general cargo.

MEDICAL: Private and state-owned hospitals. All facilities available.

TANKERS: Discharge at Moles 3 and 4.

FRESH WATER: Only available at the berths on the Southern part of the port.

FUEL: All grades available, by barge.

REPAIRS: All repairs excluding dry docking, can be effected. Floating crane available, capacity 50 tons.

AIRPORT: 16 km. from port. Daily flights to Buenos Aires.

CUSTOMS ALLOWANCE: 60 cigarettes per day, and 2 bottles spirits each man.

CONSULS: The following countries are presented at Rosario:

Belgium
Brazil
Chile
Denmark
Dominican Republic
Ecuador
Egypt
Finland
France
Germany
Great Britain
Greece
Italy
Lebanon
Netherlands
Nicaragua
Norway
Panama
Paraguay
Peru
Spain
Sweden
Switzerland
Syria
Uruguay
Yugoslavia

POLICE/AMBULANCE/FIRE: Police 29071; Ambulance 45600; Fire 20147.

TELEPHONES: Can be placed aboard.

SHORE LEAVE: No restrictions.

AUTHORITY: Rosario Port Administration.

SAN LORENZO: 32.45 S. 60.38 W. (See Plan Book)

Km. 442 – River Parana (Province of Santa Fe) "B" category port.

N.B. Refer to beginning of Argentina and River Plate Ports.

On the left bank of the River Parana from seaward, 16 miles above Rosario and 238 miles by river from Buenos Aires.

The port includes the separate sections of Puerto Borghi, Puerto San Lorenzo and Puerto San Martin.

APPROACHES: Access is controlled by the passes Destileria and Borghi above Rosario.

ANCHORAGE: Vessels may anchor in the roads between buoys 447 and 449.

MAX. SIZE: Up to 27 ft. draft depending on river depths.

HEALTH: Vessels coming in from abroad, should take pratique in Rosario Roads, advising Agents there in good time.

RADIO: Use Radio Rosario LSQ 38, on 477 kc/s. A1. This broadcasts, in Spanish at 1305 hrs. daily depth of water in the river between Santa Fe and Rosario.

TUGS: Not required.

BERTHS: *Puerto Borghi.* Is a privately owned berth used for loading zinc ores, cinders and sulphuric acid. It consists of 3 dolphins each 6 × 9 m., spaced 21 m. apart, giving 60 m. alongside which vessels can lie. Both anchors must be laid out and moorings taken to shore. There is a conveyor belt, rate 60/80 t.p.h. fixed by a crane to work at an angle of from 20/25 degrees, so that if vessels are loading both fore and aft they must shift to position their holds. The belt is reversible, and can be used for discharging vessels fixed with bucket dredge gear in each hold. There is ample water alongside.

This port comes under Rosario for Customs, but under San Lorenzo for Maritime Prefecture control, and stevedores are taken from San Lorenzo.

San Lorenzo proper is a third category Custom House and thereby independent of Rosario. There is an important petrochemical complex here which is being extended, which may lead to an improvement in port facilities.

The roads are between buoys 443 and 445 in the main navigation route and within this area vessels may anchor to await entrance to port, without paying dues.

This was originally a grain port but this now takes second place to industrial developments.

At km. 443 there is a short concrete mole 50 m. long, with 21 ft. alongside used for liquids, (Duperial Berth), chemical and petrochemical products.

There is a grain elevator at Unit VIII (ex. 14), with a total storage capacity of 80,000 tons, and 39 ft. alongside. The elevator has one tube, with a load rate of 150/180 t.p.h.

There is also a pipe-line at this berth for loading vegetable oils in bulk, rate from 30 to 70 t.p.h. (if using tanker trucks).

A line for loading fuel oil has also been installed here.

State Oilfields YPF have a large cracking plant here, with 3 concrete piers of 80, 60 and 80 m. long respectively, in deep water and situated just North of Unit VIII. Piers 1 and 3 operate in the discharge of crude from overseas or coastal tankers and in the loading of products with four 6 in. and 10 in. lines. No. 2, with the same size lines is used for coastal tankers only.

Esso have two dolphins here for discharge, with 6 in. and 10 in. lines respectively, but in 23 ft. only.

San Martin is immediately alongside San Lorenzo, and the access channel commences off San Lorenzo, by the cross river car ferry terminal (service San Martin to Victoria, on the left bank of the Parana).

This channel is 75 m. wide, dredged to 20 ft. at zero, and two miles long.

At the entrance to San Martin is the ferry basin in 6 ft. 6 in. and also a small basin for river craft.

Immediately North of this is the State Gas mole, in deep water used for handling liquid gas and fuel oil.

Unit 15 is no longer used for shipping, but the storage capacity is made use of. Linseed oil is loaded over the Pereda mole, in deep water with a 10 in. loading line. This mole is also used for the discharge of tankers and nearby is another mole used for discharge of oilseeds.

Unit X (ex 17), in 29 ft. 5 in. has capacity of 52,000 tons, load rate 150/180 t.p.h. over one spout.

At km. 451, there is a petrochemical plant which has a concrete mole 96 m. long, with 26 ft. 2 in. There is one 2.5 ton crane on the mole, which is authorised to work with light fuels.

FUEL: Available.

FRESH WATER: Not much available; Masters are recommended to take elsewhere if possible.

MEDICAL: Attention available.

REPAIRS: Small repairs attended to. It is also possible to bring specialists from Rosario if bigger jobs have to be handled.

CONSULS: Consular clearances must be made at Rosario.

AUTHORITY: Administracion de los Puertos Parana Medio.

SAN NICOLAS: 32.22 S. 60.12 W. (See Plan Book)

Km. 343 – River Parana (Province of Santa Fe) "B" category port.

N.B. Refer to beginning of Argentina and River Plate Ports.

On the left bank of the Parana River, from seaward, below Rosario, and 188 miles by river from Buenos Aires.

APPROACHES: Between San Nicolas and Rosario are the "Paso Paraguayo" and "Abajo Yaguaron" passes, and below San Nicolas, apart from Martin Garcia, the "Tonelero" and las "Hermanas" passes.

The old-time characteristic of a grain port has been submerged in the industrial complex which has grown up around the steel mill, but grain is still shipped there.

The entrance channel to the port from the river is kept dredged to 24 ft. 6 in. at zero.

MAX. SIZE: Draft up to 24 ft. depending on river conditions.

RADIO: Use LSQ 38, Rosario, on 477 kc/s. A1.

BERTHS: From North to South the sections of this port are:

Old Port. Alongside the city of San Nicolas, originally composed of 7 sections on a cliff some 18 m. high, and under which vessels moor, having to keep themselves off with an anchor and a kedge. Only 2 sections now work and loading of grain is carried out from the sheds or from railway wagons on the cliff, by chutes. Sections 1 and 6 can load at 90 t.p.h. from each of the 2 tubes at each berth.

Section 2 can only load bagged cargo, again by chutes.

Shed capacity is 16,000 tons, increased by direct discharge from railcars. Depth of water alongside 26 ft. in almost still water.

At the Old Port, a wooden float is used to keep the vessel at the required distance from the cliff.

New Port. Three km. downstream from San Nicolas. It consists of a berth formed by a dolphin 60 m. upriver from the end of a concrete mole 287 m. long, with ample water alongside, there being room for 2 vessels.

On the mole there are 5 portal cranes (3 of 1.5 tons and 2 of 3 tons) as well as 2 cranes, capacity 20 tons at 15 m. radius, or 12 tons at 25 m. Railway lines are installed but there are no sheds on the wharf.

Just downstream from the wharf a loading gallery is being built for a new 16,000 ton elevator, to be connected by belt to the large warehouse of the old Alcohol Distillery, which will be used for storing grain, capacity 75,000 tons. There will be berth for 1 vessel here, with 5 tubes, 2 to load simultaneously at, it is expected, 500 t.p.h. each. Once this elevator commences to operate, the remaining berths in the Old Port, which are in very poor condition, will be closed.

This new berth also incorporates the short jetty once known as the Distillery Mole.

Superusina Mole. This is the last of the sectors of San Nicolas proper, and consists of a concrete mole 200 m. long, with ample water alongside. There is a fixed heavy lift crane here, with a reach of 25 m. and capable of lifting 140 tons out of the square of the hatch of a vessel, or 180 tons from on deck. This part of the mole is reinforced.

There are also a 16 ton and an 8 ton crane for grab discharge of coal to an endless belt system working a coal stacker, handling 1,500 tons daily.

Puerto Buitagro lies South of the Ramallo brook, and comes under the district of Ramallo, although administered by the San Nicolas port authorities. It handles all the movement of the State Steel Mill, Somisa, the capacity of which is presently being increased to produce 2,500,000 tons of steel per year.

Again, from North to South, the moles are:

Ing. Buitagro general mole. 300 m. long, for movement of general cargo. It is 16 m. wide and has 1×30 ton crane and 2×15 ton cranes.

Gotaas Larsen berth. This berth consists of 4 dolphins, 35 m. apart, with bollards on the 1st and 4th. No longer in use as the lightening vessels discharge with their own gear at a new extension South of the Ing. Buitagro wharf, while ocean carriers discharge at this extended wharf. Now known as Somisa wharf.

Ing. Buitagro wharf. 680 m. long, immediately South of the Gotaas Larsen berth. Dredging is carried out continuously and there is 26 ft. at zero alongside. Four vessels of up to 22,000 tons can operate, plus 2 more in second tier. Storage capacity in the yards adjacent to the wharf is 1,370,000 tons iron ore and 300,000 tons of coal. Discharge is by grab, 1×45 tons and 2×12 tons each giving a discharge rate of 4–500 t.p.h. provided hatches are sufficiently wide to permit easy working.

Capacity of the belts is being increased, to meet the requirements of the larger capacity, now raised to 2,500,000 tons installed capacity, and which will be increased to 4 million tons in 1978. These include a new 1,400 t.p.h. discharge unit for ore and/or coal, a new system of conveyor belts 860 m. long, a stock piler capacity 5,000 t.p.h. and belts for moving coal 1,200 m. from stock pile at 3,000 t.p.h. with a transfer tunnel 600 m. long fitted with 13 vibratory screen feeders.

At Puerto Buitagro all discharge or loading is carried out by factory personnel, no outside stevedores engaged.

The bulk wharf has been extended South with a berth for self-discharging ore carriers, or colliers, and also for ore carriers using shore installations. At the moment this berth is used by the Gotaas Larsen lightening vessels only.

TUGS: Compulsory for vessels over 1,000 NRT at Old Port. It is usual, however, to use tugs only once, when entering if the vessel is turned and remains with her bow facing the entrance channel, or on leaving if moored with bow upstream, and therefore having to turn to leave. If vessels operate without a tug. Master is responsible for any damage incurred to installations, etc., and when there is a high wind it is advisable to use one. For movements in port use of a tug is optional, but again, high winds may make it advisable.

DENSITY: Fresh water.

FRESH WATER: Available at berths.

FUEL: Available, but must be delivered from Buenos Aires or San Lorenzo by truck.

MEDICAL: Doctor, hospital facilities available.

CONSULS: Italian, Portuguese and Spanish.

SAN PEDRO: 33.42 S. 59.39 W. (See Plan Book)

Km. 277 – River Parana (Province of Buenos Aires) "B" category port.

N.B. Refer to beginning of Argentina and River Plate Ports.

On the left bank of the Parana River from seaward, below Rosario and 151 miles from Buenos Aires, by river.

APPROACHES: There are no bars below this port, except Martin Garcia, and vessels can therefore load to this limit almost the year round.

The roads are 1,500 m. down-stream from the entrance channel.

ANCHORAGE: Vessels can anchor if necessary about 500 m. from wharf.

HEALTH: Free Pratique can be taken, but it is advisable to radio Agents at Buenos Aires for them to arrange, since there is no radio here and the Doctor must come from San Nicolas.

RADIO: None; use Rosario LSQ 38, 477 kc/s. A1, or Buenos Aires.

TUGS: Can be made available if required.

MAX. SIZE: The entrance depth has been dredged to 25 ft. The factor governing draft is the water level in the Parana River at the Martin Garcia Bar. See "Mitre Channel" (Under River Plate).

BERTHS: The main mole has been rebuilt and a loading gallery 35 m. high installed, working with 7 telescopic tubes, though only one can work at a time, load rate being reported at 1,000 t.ph. Storage capacity in the elevator is limited, maximum 7,000 tons but there are nearby deposits for 90,000 tons.

As rebuilt, only one vessel can load from the grain elevator, maximum length, according to Ports Department, 200 m.

There is a second berth available for operating from portable belts, etc., in 24 ft. 6 in. There are no railway lines on the berths and no cranes.

There is also a wharf for river traffic in 8 ft.

DENSITY: Fresh water.

FRESH WATER: Available at the berths.

FUEL: Not available.

MEDICAL: All medical assistance can be obtained. Hospital.

REPAIRS: Minor repairs can be effected.

CONSULS: None; consular clearances effected at San Nicolas.

SANTA FE: 31.40 S. 60.37 W. (See Plan Book)

Km. 585 – River Parana (Province of Santa Fe) "B" category port.

N.B. Refer to beginning of Argentina and River Plate Ports.

Situated on the Santa Fe river, a tributary of the Parana, 90 miles by river from Rosario and 312 miles from Buenos Aires.

APPROACHES: Entrance to the port is through an access channel, 6,085 m. long, and with 24 ft. at zero.

On this section of the river, from Rosario to Santa Fe, vessels must keep 2 ft. under the keel if measuring less than 50 fiscal units, or 2 ft. 6 in. if over. This applies when the hydrometer at Santa Fe indicates over 1.70 m. of water over zero. If the hydrometer measures less than 1.70 m. (5 ft. 7 in.) then vessels must have 2 ft. 6 in. and 3 ft. 6 in. respectively under the keel.

PILOTAGE: Port Pilot comes aboard in the Parana, at the mouth of the entrance channel. Six hours advance notice is required for the Pilot to be in position.

ANCHORAGE: Until mid 1974 it was possible to wait in the Roads at km. 583/5. Now, however, the access channel is being dredged thoroughly, and until further notice vessels can only enter or sail between 0900 and 1700 hrs. and if unable to enter within this period must wait in Diamante Roads (km. 533) and follow radio instructions from the Prefecture. If the Diamante Roads have already been passed, a vessel may lie below Punta Alvear, or eventually at km. 568 (Animas de Paracao) but must immediately notify the Santa Fe Prefecture.

Vessels sailing must leave with sufficient margin to be able to pass "Los Pajaros" (km. 468/473) in daylight, and avoid anchoring in the sectors indicated above as reserved for Northbound vessels.

A report received mid 1976 advises vessels not to load beyond 17 ft. draft, as the shallowest part of the river between Santa Fe and Rosario dropped in one week from 22 ft. to 20 ft. 6 in.

MAX. SIZE: LOA 190 m. beam 25 m.

SIGNALS: There is now a signal station on the top of the tower of the new elevator (unit 1) in visual and radio contact with the control station tower at the river end of the access channel, where the signals are hoisted. It is also possible to observe movement in the roads from here.

The signals in the entrance channel are:

By day (shown at both ends of the access channel)

White globe, 60 cm. diameter	Channel free for overseas vessels.
Red biconic mark	Exit only for overseas vessels.
Green cone	Free movement of coastal vessels.
Yellow cone	Movement of coastal vessels allowed, but with precaution.

By night (interior signal staff only)

White flashes	Entrance free for overseas vessels.
Red flashes	Exit free for overseas vessels.
Green flashes	Free movement for coastal vessels.
Green and red flashes	Coastal movement only with restrictions.

Absence of signal – signifies port and channel closed.

All vessels will await the corresponding signals, which can be asked for by whistling, repeating one long, three short, for overseas vessels, or two short, one long, for coasters.

Should the absence of signals be due to a failure of the system, instructions will be sent by the Authorities.

NAVIGATION: *In the Channel.* Maximum speed in the entrance channel is 5 knots, however, the Pilot can advise on other speeds.

Movement by night is possible, but usually Pilots will not take a vessel out after 1500 hrs., since navigating the passes down river might oblige a vessel to lie in the roads, and turning there would require the use of two tugs, it being easier to wait until through transit down stream is possible.

During fog. During fog, usual international precautions must be observed, but if the fog is very thick, entrance or departure of vessels is prohibited without special permission. There are no official statistics as to frequency of fog, but in the period May/August there may be five to six foggy days a month, and in the rest of the year one or two a month.

HEALTH: Free Pratique. As there is no radio station here, Master should radio Agents with the usual request.

RADIO: Regulations in this port prescribe that Agents or Consignees must give written notice to the Port Authorities 24 hours before ETA, with details of vessel, cargo carried etc., or if in ballast, indicating for account of whom the vessel will load.

ETA should be confirmed if there is any change, since the port Pilot and tugboat must be sent out to the main river to meet the vessel. This will also allow the preparation and presentation of the Notice of Readiness without delay.

Radio LSQ 38, on 477 kc/s. A1, at Rosario, transmits river depth at 1305 hrs. GMT.

TUGS: One tug is required by all vessels over 20 Fiscal units and up to 165 m. o.a.l, with a second tug standing by at km. 592 unless the Pilot calls for its services (high winds, etc.).

Vessels over 165 m. will have a second tug standing by in the roads. Outbound vessels over 20 fiscal units will take two tugs, and let go the stern tug at km. 592, the bow tug continuing until the roads are reached. However, if sailing from Basins 1 or 2 or the Terminal berth and with no other vessels in the way, one tug only may be taken, provided the wind is below 22 knots.

BERTHS: The port is composed of four parts:

Dock No. 1, with stone wharves, 564 m. frontage on the East and 672 m. on the Western side, 120 m. wide and well equipped with cranes, and sheds; 24 ft. at zero.

Between Dock 1 and Dock 2, on the pierhead there is a fixed 20 ton crane for heavy cargo.

Dock 1 is the main import area, while in berth No. 2 there are tanks for vegetable oil, capacity 5,000 tons and pumping capacity 2/300 t.p.h.

Dock No. 2 lies parallel to Dock 1, and has a piling frontage 900 m. long on the East, 720 m. on the West and 120 m. wide. 22 ft. at zero.

Both docks are served by broad and narrow gauge railway lines.

Derivation Channel. 2,178 m. long, lies to the West of Dock 2. It has open banks, with no stone or wooden frontage. There are a number of dolphins and mooring facilities. It is reserved for Inflammables and there are also two deposits for Quebracho Logs and for Bones. Although there are railway lines, there are no cranes or facilities for handling cargo. Vessels awaiting orders or effecting repairs can lie up in the Eastern side of the Channel, North of the Esso plant. Shell and YPF plants on the Western side, where vessels may take on bunkers.

Coastal Wharf. Concrete wharf, 810 m. long, lying between the West side of Dock 1 and the Elevator at Unit 1. It has 4 dolphins and can berth and work two vessels simultaneously in 24 ft.

Allotment of berths. Allotted by the port by order of arrival. If berthing in the Derivation Channel, spars must be placed to fend the vessel off the bank, and an anchor may also be cast, but this must be done under the direction of the port Pilot.

Loading Grain. There are two units here, comprising three elevators in use. Unit 1 on the South end of the West quay of Dock 1, next to the coastal section, can berth two vessels in 24 ft. The elevator which is new, has a capacity of 50,000 tons, and the loading gallery has eight spouts with three belts, so that both vessels can operate simultaneously, although no more than three spouts can be in use together, with a load rate of 300 tons each, rising to 400 tons in favourable conditions, or when only one vessel is loading.

Unit 2 is now composed of the ex-Bunge Elevator on the Northwest of Dock 2, capacity 12,000 tons, and with 6 tubes, loading simultaneously by two at a rate of 200 t.p.h. each, and also of the De Ridder Elevator, on the Southwest side of the dock, capacity 6,000 tons, and with two tubes, capacity 200 t.p.h. each.

FUEL: Available at the pipe-lines in the Derivation Channel. If small quantities only are required, these can be delivered by truck.

FRESH WATER: From hydrants in Docks 1 and 2, or by tug in the Derivation Channel.

REPAIRS: Can be arranged. There are several tugs and lighters equipped to render assistance to vessels.

MEDICAL: Doctors and hospital facilities available.

TANKERS: Berths owned by Esso, Shell, and YPF in Derivation Channel.

CONSULS: At Santa Fe following countries are represented: Italy, Paraguay, Spain. Other consuls at Rosario and Buenos Aires.

AIRPORT: 17 km. from Santa Fe, regular flights to Buenos Aires and other Argentine cities.

CUSTOMS ALLOWANCES: For consumption on board each man allowed 40 to 60 cigarettes a day and 1 litre of spirits a week.

POLICE/FIRE/AMBULANCE: Police: Tel. 21141; Ambulance: 36220 and 24687; Fire: 21212.

TELEPHONES: On board connection is only made for naval vessels.

SHORE LEAVE: Allowed, provided Crew members in possession of identification cards.

AUTHORITY: Administracion de los Puertos Parana Medio.

VILLA CONSTITUÇION: 33.15 S. 60.17 W. (See Plan Book)

Km. 365 – River Parana (Province of Santa Fe) "B" category port.

N.B. Refer to beginning of Argentina and River Plate Ports.

On the left bank of the River Parana from seaward, 33 miles below Rosario and 197 miles by river from Buenos Aires.

PILOTAGE: Port Pilot available, and obligatory.

MAX. SIZE: Up to 25 ft. draft depending on river depths.

TUGS: Vessels over 2,000 NRT must use 2 tugs.

RADIO: Rosario LSQ 38, on 477 kc/s., A1.

BERTHS: *In Villa Constitucion* the old overseas moles are closed, owing to bad condition. The coastal wharf is also being dismantled, but a concrete mole next to it is being used for this trade. There is a proposal to recondition the old railway wharf in view of increasing movement.

In Unit Two. Two vessels can load grain, but the condition of the installations is very precarious and may well be condemned.

At the Elevator berth 2 vessels can operate, in 27 ft., North and South. At each berth there are several loading tubes, but only one can operate at a time, giving 3/400 t.p.h. on each berth.

Capacity of the elevator is 50,000 tons, plus 170,000 tons in underground deposits. There is also a belt for bag loading.

Puerto Acevedo. Two km. South of Villa Constitucion is Acindar Mole, otherwise known as Puerto Acevedo, where a large steel mill is installed. The port is under the jurisdiction of Villa Constitucion and pending a definite resolution as to Villa Constitucion Roads, vessels awaiting berth anchor off the Acindar mole.

The mole is 110 m. long by 34 m. wide, in 29 ft. and is used for the discharge and storage of steel billets. It is fitted with two 45-ton electric cranes.

Port Pilot from Villa Constitucion attends here, but tugs are not necessary. No facilities are available, except for water, to obtain which a vessel will have to supply a long hose to be coupled up to the factory itself.

Rate of discharge depends to some extent on capacity of ship's derricks, with 3-ton lifts 80 tons per hatch per hour can be maintained, but with only 1-ton lifts, no more than 40 t.p.h.

FRESH WATER: Obtainable.

FUEL: Not available.

MEDICAL: Doctor and hospital facilities available.

REPAIRS: Can be effected, if necessary bringing men and equipment from Rosario, or San Nicolas.

CONSULS: Consular despatches must be taken at Rosario.

ZARATE: 34.09 S. 59.05 W. (See Plan Book)

Situated on the West bank of Parana River, 150 miles above Buenos Aires.

N.B. Refer to beginning of Argentina and River Plate Ports.

TUGS: Not required.

MAX. SIZE: Up to 26 ft. depending on river depths.

BERTHING: The river here is wide and deep, but the 8 wharves are no longer used for ocean going cargo, and have silted up, there being only ten feet at the largest, or National Mole. This is the base for the rail ferry communicating Buenos Aires with the Province of Entre Rios and eventually communicating, with another rail ferry, with Paraguay. A rail road bridge is under construction here, which will cross the Parana Guazu arm of the Delta, at Kilometre 180 on the main route upstream.

DEVELOPMENTS: One of the first developments has already been authorized by the Port Authority. This will be a Petroleum storage plant for Paraguay, at km. 112.6 on the Parana de las Palmas river, just upstream from Zarate. It will be for the exclusive use of Crude imports for Paraguay, where ocean tankers will discharge to tanks, and river tankers continue transport to Medin, near Asuncion. Work is expected to commence shortly, but it is not known yet if the berth will be known as "Zarate" or by some other name although it will come under the Zarate port authority.

FRESH WATER: Available at Smithfield Wharf.

FUEL: Not available.

MEDICAL: Doctor and hospital facilities available.

CONSULS: Italy is represented locally. All other consuls at Buenos Aires.

REPAIRS: Small repairs can be effected.

III. *SOUTH ATLANTIC PORTS*

Bahia Blanca
Caleta Cordova
Caleta Olivares
Caleta Olivia
Comodoro Rivadavia
Galvan
Ing. White
Mar del Plata
Necochea
Puerto Belgrano
Puerto Deseado
Puerto Madryn
Puerto Rosales
Punta Ancla
Punta Ciguena
Punta Colorado
Punta Medanos
Quequen
Rio Gallegos
Rio Grande
San Antonio del Este
San Julian
San Sebastian
Santa Cruz
Ushuaia

BAHIA BLANCA: 38.47 S. 62.16 W. (See Plan Book)

(Incl. Galvan, Ingeniero White, Puerto Belgrano, Puerto Rosales, Punta Ancla and Punta Ciguena.)

(Province of Buenos Aries) "B" category port.

N.B. Refer to Argentina, Section I.

APPROACHES/PILOTAGE: *Entrance Channel.* Commences at Rincon Light Buoy, which is a whistling buoy, fitted with radar reflectors and is stationed some 17 miles S.S.W. from the Recalada Lighthouse. It is a large buoy, painted with black and white vertical stripes, it can shift or be extinguished, being rather exposed. In case of doubt vessels are recommended to sound and stay outside the 10 fathom line until daylight or fog has cleared. Pilots must be requested 24 hours in advance. See "VHF".

From this buoy vessels must proceed past buoys 1 to 10, and the Bay Pilot comes aboard near buoy 11 (39° 05′ S. and 61° 48′ W.). There is no pilot ship on station, and vessels arriving at this point after sunset must stand off until daybreak, unless a Pilot has been ordered and is approaching, when vessels can anchor and wait near buoy 11. To avoid delay and waiting time, Masters should keep Agents well advised by radio to station LPW 2, which listens from 0700 to 2400 hrs. on 500 kc/s. from 19 to 25 minutes past each hour, every hour. As the coast is shallow here, with South or East winds it

Distance Table
Montevideo and Buenos Aires to Ushuaia and intermediate ports
Nautical miles

	Montevideo	Recalada Practicos	La Plata	Interseccion Practicos	Buenos Aires	Mar del Plata	Necochea y Quequen	Arroyo Pareja	Ing. White	San Antonio	Madryn	Comodoro Rivadavia	Deseado	San Julian	Santa Cruz	Gallegos	Virgenes (Lighthouse)	Magellan Straits	Ushuaia
Montevideo	—	16	118	108	128	206	279	452	466	626	671	850	891	1015	1076	1151	1167	1182	1376
Recalada Practicos	16	—	102	92	112	190	263	436	450	610	655	834	875	999	1060	1135	1151	1166	1360
La Plata	118	102	—	10	30	292	365	538	552	712	757	937	978	1101	1162	1237	1253	1268	1462
Interseccion Practicos	108	92	10	—	20	282	355	528	542	702	747	927	968	1091	1152	1227	1243	1258	1452
Buenos Aires	128	112	30	20	—	302	375	548	562	722	767	947	988	1111	1172	1247	1263	1278	1472
Mar del Plata	206	190	292	302	302	—	73	246	260	434	479	658	700	823	884	959	975	990	1184
Necochea y Quequen	279	263	365	355	375	73	—	173	187	361	405	584	642	762	823	898	918	933	1135
Arroyo Pareja	452	436	538	528	548	246	173	—	14	280	316	500	568	682	743	818	838	853	1080
Ingeniero White	466	450	552	542	562	260	187	14	—	294	330	514	582	696	757	832	852	867	1094
San Antonio	626	610	712	702	722	434	361	280	294	—	227	411	473	603	664	739	759	774	1009
Madryn	671	655	757	747	767	479	405	316	330	227	—	274	345	473	534	609	629	644	875
Comodoro Rivadavia	850	834	937	927	947	658	584	500	514	411	274	—	156	293	354	429	449	454	703
Deseado	891	875	978	968	988	700	642	568	582	473	345	156	—	153	214	289	309	324	564
San Julian	1015	999	1101	1091	1111	823	762	682	696	603	473	293	153	—	96	171	200	215	487
Santa Cruz	1076	1060	1162	1152	1172	884	823	743	757	664	534	354	214	96	—	114	146	161	450
Gallegos	1151	1135	1237	1227	1247	959	898	818	832	729	609	429	289	171	114	—	67	82	390
Virgenes (Lighthouse)	1167	1151	1253	1243	1263	975	918	838	852	759	629	449	309	200	146	67	—	15	333
Magellan Straits	1182	1166	1268	1258	1278	990	933	853	867	774	644	454	324	215	161	82	15	—	315
Ushuaia	1376	1360	1462	1452	1472	1184	1135	1808	1094	1009	875	703	564	487	450	390	333	315	—

is advisable to stand well off at night as there is also a tidal current favoured by these winds.

The Bay Pilot takes the vessel to the Bahia Blanca roads, which commence for Ing. White and Puerto Nacional between Naposta brook and the South Elevator. For Galvan he takes the vessel as far as the South Elevator. At either of these points the port Pilot comes aboard for actual berthing operations.

Vessels bound for Punta Ciguena, Punta Ancla, Rosales or Puerto Belgrano, take on their port Pilot (ordered in advance through the Agents by radio), at buoy 17.

In the access channel the following regulations must be observed:

(a) in the areas included between the pairs of buoys 07–08, 12–16, and 26–29, it is prohibited to approach or cross in front of any vessel which because of its draft has to remain in the centre of the channel, such vessels always having priority.

(b) in the event of two vessels meeting whose drafts do not permit them to depart from the centre of the channel, the vessel leaving port has priority, the vessel entering having to effect such necessary manoeuvres so as to not interrupt its navigation.

The access channel is 150 m. wide and is marked with light buoys, which permit navigation by night, except between buoys 26 and 28 where the width is 75 m. Between buoys 12–16 the depth is 30 ft. and in the access channel to port Ingeniero White, between pairs of buoys 24 and 29, the depth is 33 ft. with a width of 170 m. The maximum draft for vessels navigating the channel is 35 ft., and dredging operations are in hand to bring the depth to 33 ft. 7 ins.

Buoys 01, 02, 03, 04, 05, 06, 09, 18, 19, 20 and 21 are mid-channel, and all illuminated. There is a degaussing buoy between Nos. 18 and 19, conical, painted blue and white checks.

Special warning. At very low neaps, and with strong N. winds there may be up to 5 ft. less water than is shown on charts.

Tidal range is 12.6 ft. at springs to 6.4 ft. at neaps, but as much as 19 ft. has been observed with S.W. winds, whose action is similar to the Plate winds.

Inner Roads. From Ing. White to Galvan there is room for two vessels drawing 32 ft. to anchor, as well as a number of vessels drawing 24 ft. The access channel to Galvan has been dredged to 32 ft. for the new Inflammable berths, and a turning basin 400 m. in diameter at 33 ft. dredged due South of Galvan pier. The Inflammable berths are also at 33 ft., the intention being to dredge down to 38 ft. at zero.

ANCHORAGE: Merchant vessels which have to wait their turn to come alongside quays in the Bahia Blanca Estuary and oil discharge points at Ancla and Ciguena Points, must remain anchored 2 miles E.S.E. of buoy 17.

MAX. SIZE: Currently the maximum draft for the access channels is 35 ft., although it is expected that this will be deepened to 36 ft. 7 in. shortly and ultimately to 40 ft., with the channel and elevator locations being dredged to these maximum depths.

The maximum length permitted in the port of Ingeniero White is 230 m. Draft is limited by the necessity of having 2 ft. of water below the hull for navigation in the channel and 1 ft. inside the port, which in practice limits drafts to 35 to 36 ft.

RADIO: LPW 2 on 500 kc/s. A2, working frequency 431.5 or, LPW 45 on 4415.8. A3.

For weather forecasts in English, use either Radio Pacheco at Buenos Aires LPD 5 on 512 kc/s. A2, or Radio Comodoro Rivadavia LPX 2 on 474 kc/s. A2.

VHF: Pilots now use VHF, and Channel 12 is set as a "listening channel" during transit of the entrance and the Naval Base at Belgrano acts as receiver/repeater.

Channel 8 is kept for manoeuvring in port, after contacting tugs and walkie-talkies are used by Pilots and tugs in this band.

Any "bridge to bridge" communications will use Channel 6, returning later to Channel 12.

Channel 9 is reserved for oil tankers for Punta Ancla or Punta Ciguena.

Channel 4 is reserved for Navy use in the Navy Base, but may be used in emergency.

TUGS: No tugs are required at Punta Ancla or Punta Ciguena. For Rosales and Puerto Belgrano tugs are requested from the Naval Base at Puerto Belgrano, and make contact between buoys 24 and 25.

For the other ports (White, etc.) tugs come alongside in the anteport, where the port Pilot boards.

Argentine vessels are berthed by the Bay Pilot at any of the berths, but foreign flag vessels take a Port Pilot, who comes on board at the Inner roads on one of the tugs, regulations for which are as follows:

Vessels over 3,000 tons gross require 2 tugs, those from 500 to 3,000 tons, 1 tug, and under 500 tons none.

For the Iron mole, vessels up to 10,000 tons do not need a tug, from 10,000 to 15,000 gross, 1 tug and over 15,000 tons 2 tugs.

For Puerto Galvan, vessels over 3,000 tons gross take 2 tugs on entering, and one on leaving provided they berth bows outwards, otherwise they need 2 tugs. Between 1,000 and 3,000 tons, vessels take 1 tug when entering and leaving if they berth bow inwards. If mooring bow outwards they must take 2 tugs on berthing, but require none on leaving.

These rules are for normal weather conditions. Masters can ask for more tugs, or alternatively not pass cables to the tugs if this could be dangerous to the vessel or tugs, but in this case, tugs must accompany the vessel during the manoeuvre to act in emergency.

BERTHS: N.B. Agents must give 10 days advance notice of arrival of reefer vessels to the Authorities, and check this with 48 hours confirmation of arrival. Tankers are exempt from this rule but must confirm arrival time at buoy No. 11, 48 hours in advance. Precedence for berthing granted in accordance with arrival at buoy 11 at the entrance channel. All requests for free pratique by radio are made in the usual manner to Agents, with 12 hours advance notice.

The ports in the Bahia Blanca area are, from East to West:

Punta Ciguena Puerto Rosales Puerto Belgrano	adjacent to each other between buoys 21 and 22 of the access channel.
Ingeniero White	also adjacent, and some 14 miles West of Puerto Belgrano.
Galvan	about 2 miles West of Ing. White.

Punta Ciguena and Punta Ancla

There is a rotary buoy with connection on the starboard side of tankers. The oil tanks belonging to the State Oil Company have a capacity of 240,000 cu.m. and are connected by pipe-line to the State Refinery at La Plata.

At Punta Ciguena there is a mooring for tankers with four mooring buoys and port side connection. It is currently out of service, and it is intended to replace it by another rotary buoy. As at Punta Ancla, this mooring belongs to the State Oil Co.

Puerto Rosales

An old grain port which is used by small craft, shortly to be fitted out as a private fishing port. The pilot launches are based here.

Puerto Belgrano (Saluting Base)

The entrance channel, 2 miles West of Punta Ciguena buoys, is 1.7 miles long, 150 m. wide and dredged to 30 ft. at zero.

Being a Naval base, care must be taken to observe regulations. In daytime signals are hoisted at the head of Mole C, and at night lights are shown at a height of 34.5 m. from the signal station, being visible for ten miles. A strong green light prohibits entry, and a white light above green prohibits sailing from the port. Two green lights, vertical, both entry and leaving prohibited.

There is a reserved zone for Hydroplane, between 38° 51′ 7″ S. 62° 06′ 08″ W.; 38° 52′ 04″ S. 62° 09′ 03″ W.; 38° 54′ 06″ S. 62° 07′ 02″ W. and the buoy at the end of the S.W. breakwater.

Gunnery Exercises. Captains are warned that in order to avoid any danger, the greatest care should be taken when navigating or anchoring in the security zone, between the coast and an imaginary broken line which passes through the following:

(A) Lat. 39° 00′ 01″ S. Long. 61° 37′ 01″ W.
(B) Lat. 39° 05′ 02″ S. Long. 61° 40′ 01″ W.
(C) Lat. 39° 02′ 05″ S. Long. 61° 47′ 09″ W.
(D) Lat. 38° 58′ 02″ S. Long. 61° 51′ 00″ W.

Danger Zone. Situation Lat. 38° 53′ S., Long. 62° 06′ W. (approx.).

During gun practice at the Naval Base of Puerto Belgrano, navigation is prohibited in the circular area of 180° from the central point of the Signal Station which extends from 152° to 332°. The boundary of this area passes 9 miles off the Signal Station.

While gun firing is being carried out, the Signal Station will hoist during the day 2 "B" flags of the International Code on the same yard-arm. This signal will be hoisted half an hour before practice commences and will be furled when firing ceases.

At night the signals will be substituted by 3 vertical lights, the top one, red, and the following two, white. In addition a searchlight will sweep the zone every 15 minutes, casting a beam of 3 minutes duration.

The Prefecture of Ingeniero White will notify all ships in good time of the expected hour and date on which firing practice will commence.

Should exercises not commence on the date and hour fixed for same, the fire signal will be hoisted half an hour before the appointed time, and on the other yard-arm, the flag "N" (negative of the International Code). These signals will be shown for half an hour from the time they are hoisted.

During exercises, the firing intervals will be signalled in the following form: during day, by hoisting "N" flag, and at night by 2 vertical lights; the top one white, and the bottom one, green.

Ingeniero White

South Elevators. Nos. 1 and 2: The shipping galleries at berths 1, 2, 3, 4, due to their obsolete state, have been dismantled and the berths are inoperative due to siltation. Their future usage depends on the study to be effected on the remodelling and restructuring of the Port of Ingeniero White.

Central Elevator: There are 2 berths each 300 m. long, known as quays 5–6 and 7–8, both in 29 ft. of water. Warehousing capacity 141,000 tonnes. Each quay (5, 6, 7 and 8) has 2 loading belts and 6 tubes with a nominal loading capacity of 500 t.p.h. per belt. It is normal only to berth 2 vessels at a time, since the vessels are normally longer than each individual quay.

Elevator 5: This has a new berth (No. 9) 227 m. long in 40 ft. It has 12 loading tubes and 4 belts each of 700 t.p.h. nominal loading capacity. Warehouse capacity 60,000 tonnes. Elevator 5 will only serve this berth.

Iron Quay: This is an obsolete quay and will disappear as soon as the facilities for handling general cargo have been increased.

General Cargo Quay

Lies behind and to the North of the Iron mole. There are 4 berths in this section, 3 on the North, or land side, which is in total 450 m. long in 19 ft. to 24 ft. at low water, fitted with 6 electric cranes × 3 tons on an apron 25 m. wide with 3 rail tracks. There are several cold storage chambers here for fruit, capacity over 500,000 boxes mainly apples/pears. On the South side of the basin there is one other berth, No. 20, 210 m. long in 25 ft. with three 3-ton cranes and a 125,000-box cold storage plant. There is yet another cold storage chamber on the so called "high mole", 100,000 boxes, and one with 300,000 boxes in town, making a total capacity of over 1 million boxes.

Part of the cold chambers have been adapted for storage of frozen fish.

The Port Authority has made arrangements with which the operation of vessels must comply in order to obviate or reduce waiting time for berths.

These arrangements establish inter alia the maximum stay at a given berth and the priority usage assigned to each berth. Maximum times authorised are:

(a) Loading of fruit.	
up to 54,000 cases	3 working days
from 54,001 to 72,000 cases	4 working days
from 72,001 to 90,000 cases	5 working days
from 90,001 to 108,000 cases	6 working days
from 108,001 to 126,000 cases	7 working days
from 126,001 to 144,000 cases	8 working days
from 144,001 to 162,000 cases	9 working days
more than 162,000 cases	10 working days
(b) Discharge of frozen fish.	
up to 200 tons	2 working days
from 201 to 500 tons	4 working days
from 501 to 800 tons	6 working days
from 801 to 1,000 tons	7 working days
more than 1,000 tons	8 working days
(c) Loading of frozen fish.	
up to 1,000 tons	4 working days
from 1,001 to 1,500 tons	6 working days
from 1,501 to 2,000 tons	8 working days
more than 2,000 tons	10 working days
(d) Bulk loading of cereals.	
up to 18,000 tons	2 working days
from 18,001 to 27,000 tons	3 working days
from 27,001 to 36,000 tons	4 working days
from 36,001 to 45,000 tons	5 working days
more than 45,000 tons	6 working days

(e) Others. The Port Administration will establish the rates and times in each case.

Saturday is considered to be a working day. The times laid down exceed considerably what is necessary, when normal working is effected. Nevertheless, the port is manned 24 hours of the day, whether it be a working day or a holiday.

Galvan

The oil companies have their tanks near the port, with the following lines all connected to berths 5 and 6:

Esso	one 11″ line	State Railways	two 8″ lines
	one 10″ line	Shell	two 6″ lines
La Isaura	one 8″ line	YPF	two 6″ lines
	one 6″ line		

A new wharf for tankers, 2 berths, has been completed facing on to the access channel, West of the entrance to Galvan. Depth of water at the foot of the quay is 40 ft.

The berth is 741.6 m. long, divided into two, No. 1 for Oil tankers and No. 2 for Gas, both fitted with Chiksan arms, set on a platform measuring 30 m.×20 m. and with a number of mooring dolphins either way. The berth is connected to shore by a 483 m. long roadway, 750 m. wide and on which are the pumping stations, fire installations, etc., the whole connected to the existing storage tanks on shore.

Quays 1 and 3 (25 ft.) are used for general cargo and minerals.

Now that the Inflammable Quay has been fitted out, quays 5 and 6 (29 ft.) previously used for oil products will now also be used for general cargo and minerals.

STEVEDORES: Permanent stevedores available, no prior advice being required for their availability. The vessel requiring labour must present their order 45 minutes prior to the contracting time to the Port Captaincy at the Contracting Centre.

Contracting times are 0630, 0930, 1230, 1530 and 1830 hrs. (on this shift contracting is also made for night working).

DRY DOCKS: Capacity of the dry docks is:

No. 1 215 m. OA, width on the sill 22.12 m. or at 34 ft. above the sill, 26.25 m.

No. 2 235.45 m. OA, afloat, or 205 m. closed there is also a floating dock for smaller vessels 65.8 m. OA, beam 13.46 m., capacity up to 750 tons.

FLOATING CRANE: There is a 50-ton floating crane in the Naval base at Puerto Belgrano, which can be hired for use in other ports. Apart from hourly hire, the user must pay for towage and overtime. Towage must be effected in daylight hours and in good weather.

LOAD-LINE: Vessels North-or East-bound may load to Summer Marks all year round.

WEATHER: Average velocity of winds is 11 knots, direction N. and N.E. 30%, and W. and N.W. 32%.

Rainfall averages 558 mm., with July/August the driest months.

Maximum temperature in Summer about 31° C, with an absolute maximum of 42.5° C, and a minimum of about 15° C. In Winter, maximum of about 15° C, average minimum 3.5° C, and absolute minimum minus 8.8° C.

MEDICAL: Good attention available. Hospital.

FRESH WATER: Available at any berth at Ing. White, Galvan and Puerto Belgrano, at 10 t.p.h.

FUEL: All grades available ex-wharf or by barge.

GANGWAY/DECK WATCHMEN: Vessels agent must ask Port Authority for night watchman.

REPAIRS: All classes of repairs possible including dry-docking.

CONSULS: Belgium, Chile, Denmark, France, Greece, West Germany, Italy, Netherlands, Norway, Peru, Portugal, Spain, Sweden.

AIRPORT: Regular air service with Argentine cities.

HOLIDAYS: (a) National holidays – January 1st, Good Friday, May 1st, May 25th, June 20th, July 9th, August 17th and December 25th.

(b) Not worked – Holy Thursday – December 8th. Nevertheless, the port can work; The stevedores receive an extra of 75% on their pay.

SHORE LEAVE: No restrictions.

DELAYS: Normally, there are no delays in berthing of vessels, although occasionally during the peak period for cereal exports grain ships may be delayed. It can be considered that vessels load as quickly as they can receive if the cargo is in port.

AUTHORITY: Capitan de Puerto Bahia Blanca.

COMODORO RIVADAVIA: 45.51 S. 67.27 W.

(Province of Chubut) "B" category port.

N.B. Refer to Argentina, Section 1.

On the San Jorge Gulf, 947 miles South of Buenos Aires.

ANCHORAGE: Anchorage within the five or six fathom line offers little difficulty for regular work to lighters, but the reserved zone off the YPF pier must be respected.

RESTRICTIONS: Port should be entered at high water in daylight only. Tidal range from 19 ft. 6 in. to 7 ft. 4 in.
MAX. SIZE: Dry Cargo, Length 150 m., draft 15 ft. Tankers up to 30 ft. draft.
RADIO: For radio regarding free pratique, or reporting ETA call LPX 2, on 474 kc/s. This station transmits weather forecasts in English at 0400 and 1800 hrs. GMT Radiotelegraphy 500 kHz. Radio telephone 4123, 8786, and 12,133 kHz.
TUGS: Not required.
CARGO: It is advisable to stow inwards cargo aft for this port, as lighters lying at hatches one or two receive little protection from sea and swell, and in any case, owing to the limited number of lighters, vessels usually work with two or three gangs at most.

To avoid loss of time, it is the custom in this port to leave the sling loads "as is" in the lighters and therefore a large quantity than usual of slings have to be hired from the Agents.

It is advisable to establish in Bills of Lading that lighterage is at the risk of the cargo.
BERTHS: The main part of the port consists of:

National wharf. At the end of the breakwater built over the Punta Borja reef, and still unfinished. It is L shaped, presently 1,160 m. long with 23 ft. at the extreme. Vessels can only go alongside in the last inner sections, with 15 ft. at zero. The breakwater gives some protection from the S.W. and S.E. winds, but vessels with large superstructure should not go alongside, and it is recommended to leave the pier after work is finished each day in case North or West winds blow strongly.

Apart from inward cargo, wool is shipped in quantities over this berth, where there is a Titan crane, now permissible up to 30 tons only two 9-ton electric cranes and two 5-ton steam cranes on the pier, which is also equipped with railway lines connected to the State Railway.

If working here to lighters, the best anchorage is in 25 ft. at zero, 700 m. from the wharf and with the light buoy at the end of the YPF mole bearing 329°.

YPF Mole also known as km. 3, is built over the Coronel reef a short distance North of the town. It has a length of 956 m. and 21 ft. at low water. It is used exclusively for discharging cargo consigned to YPF and for loading their oil and other products, so that special permission from YPF is required to operate here. There are two 15-ton cranes and one 4-ton crane on the mole.

The privileged zone extends 150 m. either side of an imaginary line projected from the mole, and 2,500 m. seawards, reserved for tankers loading YPF products, and other vessels cannot moor in this area. There are five mooring buoys, two each side of the mole near to its head, the fifth is 200 m. from the beacon at the sea end of the mole bearing 020°.

Kilometre 5. Three miles North of the town there is a wooden wharf, 75 m. long, with only 3 ft. at low water. Vessels using this wharf for discharge over lighters, anchor 1.25 miles off the coast.

The wharf shows a fixed red light at its head and is used for cargo consigned to the Railways. There is one 8-ton electric crane and two 5-ton steam cranes on the wharf. With E. or S.E. winds the wharf cannot work.
TANKERS: The oil berths within the Comodoro Rivadavia port area are, from North to South:

Caleta Olivares, at 45° 46′ S. and 67° 22′ W.

A loading berth for crude, which can only operate by day. A minimum of twelve hours advance notice of arrival must be given to Agents in Comodoro Rivadavia. There is a launch which assists in mooring to the four bouys, which are cylindrical painted black and clearly numbered. There is another cylindrical buoy, also black, but unnumbered marking the end of the line.

It is necessary to obtain, in advance, from the pumping station the regulations, instructions and signal code in use, signals which are made from a semaphore mast, 13 m, above sea level (land height 7.4 m.) both by day and night. There is a small wharf for landing of passengers, crew, etc., and a floating crane, capacity 30 tons. All supplies, water, etc., must be made through Comodoro Rivadavia.

Caleta Cordova, at 45° 43′ S. and 67° 21′ W. approximately, and some 10 miles North of Comodoro Rivadavia, to which it is connected by phone. This is also a loading berth for crude. Four light beacons on shore indicate the entrance. Astra, showing its light at 40 m. elevation, Loma Blanca at 55 m. (white light). With these two lights in line the concrete block, in 34ft. which sustains the end of the loading line, is 1,325 m. from Astra. Vessels should enter bearing these two lights or marks on 268° and anchor where the cross bearings of this line intersect with the line from the Novales beacon, a white light at 79 m. height, and Cordova, also a white light at 53 m.

This point is 300 m. from the block or pillar, in 36 ft. Vessels then swing on their anchor to moor by the stern to the four moorings buoys. Anchorage is good, in spite of an uncomfortable sea with winds in the 1st, 2nd or 3rd quadrants. S.E. storms are dangerous, however, and it is necessary then to go out to sea at the first sign thereof.

There are two small wharves for small boats, in the S.W. of the bay, one for high and another for low-water, the latter being covered at half tide.

There is also a floating crane for heavy lifts, but as in Olivares, all supplies, etc., must be taken via Comodoro Rivadavia.

Caleta Olivia, the third oil-loading berth, is South of Comodoro Rivadavia at 46° 26′ S. and 67° 31′ W.

There are two petroleum intakes here, North and South, a mile apart, each well buoyed once secure alongside, this delayed loading for 5 hours.

Weather: Average wind velocity 17 knots, with 79% from S.W. or N.W.

The port is open to N.E. and E. winds.

Rainfall is scarce, 189 mm. yearly, evenly distributed.

Temperature. Summer maximum is 25.5° and minimum 13.4° C, while in Winter maximum averages about 11° and minimum 3°.
FRESH WATER: Obtainable at National wharf and YPF wharf. Ships supply own hoses.
FUEL: Fuel oil and diesel available at the YPF pier in Comodoro Rivadavia.
DEVELOPMENTS: Dredging to increase depth to 26 ft. alongside wharves.
WATCHMEN: Recommended. Normally arranged by Agent.
HATCHES: According to port regulations, stevedores open and close hatches at commencement and end of cargo operations.
MEDICAL: Hospital available.
CUSTOMS ALLOWANCES: Only sufficient for normal daily consumption on board. *Custom House.* Fully authorised for import/export cargo, including reception of explosives for commercial use.
REPAIRS: Urgent repairs can be carried out by the oil companies, and there is a permanent service of divers, equipped to operate to 150 ft.
CONSULS: British, Chilean, Dutch, Greek, Italian, Belgian and Spanish.
AIRPORT: Situated 11 km. from port. Daily services to Argentine cities.
POLICE/FIRE/AMBULANCE: Regional Hospital 2451; Clinica Central 2282; Police 2778; Fire Brigade 2505.
TELEPHONES: No connection aboard vessels.
AUTHORITY: Capitania de Puerto de la Patagonia.

MAR DEL PLATA: 38.00 S. 57.32 W. (See Plan Book)

(Province of Buenos Aires) "B" category port.
N.B. Refer to Argentina, Section 1.

On the Atlantic Coast, 302 miles from Buenos Aires.
APPROACHES: The port is some 3 miles South of the main town, sheltered by 2 breakwaters (Northern arm 1,099 m. long, Southern arm 2,750 m., entrance, facing North 300 m. wide). Both breakwaters carry roads and access is open to all traffic, so that car headlights and street lighting can cause confusion at night on taking the Southern bearing.
DEPTHS: Currents constantly form a sandbank off the end of the Southern arm, which requires continuous dredging, and ruling depths are announced constantly by the authorities. Usual minimum depth on the bar is 22 ft. at zero, but under favourable conditions this may be up to 25 ft. This requires checking before committing a vessel near these limits, as in the past vessels drawing up to 30 ft. have entered and sailed. Tidal range is from 3.8 ft. Spring to 1.2 ft. neaps, but sudden storms can destroy a month's dredging in hours.

There is often a heavy swell in this port, causing vessels to range in all berths, fenders being essential. It is safer to lie outside in 36 ft. to 42 ft. if awaiting berth than in the anteport within the breakwaters.
PILOTAGE: Pilotage compulsory. Pilots requested through Agent, or in emergency, direct to Prefecture Maritime Station frequency 500 kHz. ETA by radio to Agent required 24 to 48 hours in advance.

Pilot boat about 8 m. long, grey-white in colour. Pilot boards approximately 1 mile from port entrance.
ANCHORAGE: Possible within 2 to 3 cables from port entrance. Bottom sand and mud. Occasional gales may be expected in Winter months.

The best anchorage bears 191° on the Southern breakwater light beacon and 313° on the Cape Corrientes buoy, or even farther out. Holding ground is good and strong winds may safely be ridden out here, even with a big swell.
MAX. SIZE: Draft dependent on state of tide. Keel clearance of 2 ft. 6 in. required. Normal maximum draft 27 to 30 ft., or up to 33 ft. maximum in best possible conditions.
RADIO: For radio regarding free pratique or reporting ETA call LPM 2 on 512 kc/s. A2. English weather forecasts from Radio Pacheco, Buenos Aires, LPD 5, on 512 at 0148 and 1630 hrs. GMT.
TUGS: Use of tugs is obligatory; vessels over 1,000 N.R.T. must use 2 tugs.
BERTHING: Big swell causes vessels to range, therefore Captains recommended have ready fenders for use at berth. Vessels can enter or sail any time day or night.

Basin A: Used only by fishing trawlers.

Pier Head No. 1	20 ft. depth.
Pier Head No. 2	30 ft. depth.

Basin C: Grain elevator 27 ft. depth.

This is a Naval submarine base, the Northern part of the port being reserved for that purpose.

There is considerable activity with the fishing fleet, consisting of some 300 coastal craft and 55/60 deep-sea trawlers, and the Southern part of the basin is reserved for the fishing boats. A protecting breakwater has been built out 280 m. long, from the inside of the Southern breakwater, 1,200 m. from land to minimise swell and to protect the fishing basin, and is also equipped with bunkering facilities for the fishing boats.

250 m. farther North from this there is a quay, with 2 dolphins, in 22 ft. for discharge of Butane and or Propane gas, connected to the tanks inland.

There are 3 commercial basins in the port, the Southerly one being reserved for small fishing craft. The central basin originally had 8 coastal berths, but now seems to be taken over by the trawlers. There is 22 ft. here.

The third basin has a length of 178 m. on the South side, and 300 m. on the North, all in 30 ft. On the Northern side there is a new grain elevator, with a loading capacity of 400 t.p.h. on each of 2 belts, with a total of 8 tubes available which can be divided between 2 vessels, or leave 4 or 5 available for 1 vessel. On the South side there are 2 loading towers for grain, capacity 350 t.p.h. each.

On the inside of the Northern breakwater arm, there is a berth for passenger/tourist vessels, admitting vessels up to 220 m. LOA but with no facilities beyond those for landing tourists with vessel's gangway to a paved road. Depth alongside is 30 ft. Vessels at this berth must moor bow to the South, laying out their starboard anchor.

Floating crane. There is a 40-ton floating crane (Navy), present capacity 20 tons, and also 4 mobile 2-ton cranes.

MEDICAL: Assistance obtainable alongside. Captain should telegraph Agent in good time expected date and hour of arrival. Hospitals and sanatoriums.

TANKERS: Only fuel oil discharged at berth No. 7.

DENSITY: Sea water.

FRESH WATER: Available at all berths, delivery from 7 to 10 t.p.h. at the Northern tourist berth through 3 hydrants, total 60 t.p.h. Being slightly salty is not recommendable for boiler use.

FUEL: Bunkering in Basin "C", Pier Head No. 2, also Basin "B". Subject availability and permission from Govt. Oil Dept.

DEVELOPMENTS: Dredging to obtain depth of 30 ft. in channel and port.

WATCHMEN: Compulsory. Arranged by Agent.

STEVEDORES: Gangs engaged by Port Authority according to vessels requirements.

Normal capacity per gang, per shift:

150 to 175 tons fish (direct transhipment).

70 to 100 tons general cargo.

OPENING/CLOSING HATCHES: Can be performed by crew, but in any case subject to charter party terms.

CARGO: *Loading marks.* Vessels can load to their Summer marks all year round if sailing Northbound.

Import cargo. This is a fully authorised Custom house. Berth 6 in the central basin is the most appropriate berth for handling import cargo, there being little space on shore at the other berths. Berth 7, the pierhead here, has 30 ft. and is also reasonably suitable for discharging, but in the Northern basin there is little or no room for depositing cargo alongside.

Import of Potatoes. Is permitted here, this being near the main potato growing region but permission must be obtained for the discharge of certified seed potatoes.

WEATHER: *Wind.* There is no really predominating wind, 42% being from W., N.E. and N.W., average velocity being 11 knots.

Rain. Rainfull averages 941 mm. evenly distributed.

Temperature. Summer maximum about 25° and 13° minimum, while in Winter the maximum averages 14° and minimum 3.5°. Absolute maximum and minimum are 41.6° and minus 6.7° C.

REPATRIATION: Can be arranged.

IDENTIFICATION CARDS: Compulsory. Arranged on board immediately after arrival.

CONSULS: French, Italian, Portuguese, Spanish, Uruguayan.

REPAIRS: All types of repair possible, except dry-dock repairs.

AIRPORT: Six miles distant. Two regular lines: Austral and Aerolineas Argentinas, 2 services/day between Mar del Plata and Buenos Aires.

HOLIDAYS: None. Work every day during year.

TELEPHONES: No telephones are available on board or on the berth.

DELAYS: In accordance grain elevator capacity. Normally none.

AUTHORITY: Captain of the port: Port Administrator.

PUERTO DESEADO: 47.46 S. 65.54 W. (See Plan Book)

(Province of Santa Cruz) "B" category port.

N.B. Refer to Argentina, Section 1.

988 miles South of Buenos Aires. The port is situated on the right bank of the river, and at its mouth. There is a meat packing plant.

APPROACHES: The approaches and entrance to the harbour are determined by two pairs of beacons as range or leading lights. Care must be taken not to confuse the installed portal cranes, each 18 m. high, with the beacons, which are painted the same colour.

There is 27 ft. on the bar, at low water: tidal range is 17 ft. 6 ins. to 6 ft. 2 ins.

PILOTAGE/ANCHORAGE: The Pilot will be on board, under standard instructions, but if for any reason he has to be picked up here, he will only come out about one mile, for lack of suitable craft. In such cases vessels should anchor in the roads at 47° 47′ 5″ S. and 65° 47′ 8″ W.

RADIO: For radio regarding free pratique, or reporting ETA call LPO 5 on 461 kc/s. A1. For weather reports in English, tune Comodoro Rivadavia LPX 2, on 474 kc/s., at 0400 and 1800 hrs. GMT.

BERTHING: Vessels moor starboard side. Best time for entering is on an ebb tide and sailing on a rising tide, and for berthing within the hour of high tide. With a narrow entrance channel flow of tides often exceeds five knots. There is a mud and gravel bank almost opposite and slightly West of the wharf, some 200 yards out from it, with only 16 ft. at zero. When sailing, a back current runs inside the bank, and assists in opening the bows from the wharf. Vessels then usually steam across the bank, drop anchor on the outer edge and swing on the still rising tide until facing the entrance.

No tugs are available.

The fiscal wharf has been extended to 129 m. overall, in 27 ft and is being extended to 275 m. There are two portal cranes on it, each 12 tons capacity. West of this, there is a space of 90 m. which is being filled in to extend the wharf, and then a 62 m. concrete wharf also in 27 ft., but bearing 312° while the fiscal wharf is on 284°. Both sections of the wharf have wooden fenders and there is ample storage space. Rail connections have not yet been extended to the more Westerly section, where coastal vessels discharge direct to trucks.

FUEL: Not available.

FRESH WATER: Available at the wharf, but in limited supply in Summer.

MEDICAL: Attention available.

REPAIRS: Minor repairs only.

WEATHER: Conditions are generally good, and winds seldom exceed 40 knots. If anchored awaiting Pilot or berth, care should be taken to watch for strong winds against the current. When a strong W. wind blows there can be heavy dust storms, which impede proper visibility; in such cases it is advisable to keep position by radar and stand off or anchor until the visibility improves.

Yearly average for winds is 14 knots, 63% of the time from W., S.W. or N.W.

Rainfall is low, 202 mm. yearly with an average 74 days a year evenly distributed. Maximum temperature in Summer months is 35.6° C., while in Winter maximum ranges to 15.6° and minimum to minus 8.6°.

PUERTO MADRYN: 42.46 S. 65.02 W. (See Plan Book)

(Province of Chubut) "B" category port.

N.B. Refer to Argentina, Section 1.

On the Atlantic coast, 767 miles South of Buenos Aires. One of the most sheltered and deepest harbours in Argentina.

PILOTAGE: This is obligatory both on entering and sailing. There is no resident Pilot, and one of the Southern zone group of Pilots is sent from Buenos Aires by air as required, staying on for sailing if stay in port is to be short. The Pilot will board at anchorage, unless he has brought the ship in from elsewhere. As there are no tugs it is advisable to berth in the early morning, before the wind rises.

ANCHORAGE: Half mile from pier terminal good anchorage in 60 ft. depth in protected bay. Anchorage used for transhipment cargo to smaller vessels.

RADIO: Trelew Radio (LPZ) frequency 500 and 527 kc/s., also 4428.6 and 4123.6 kc/s. Radio telephony LPZ-87 at 1500 hrs. local time on 8786.4 kc/s. At 0948 and 2200 hrs. local time area broadcast bulletin on 500 and 527 kc/s. At 1000 and 1300 hrs. local time navigation broadcast on 500 and 527 kc/s. At 1418 hrs. local time broadcast of LSQ Buenos Aires.

TUGS: None.

BERTHING: The new pier for the aluminium plant is 1,477 m. in length, the first viaduct being 1,133 m. long, 12 m. wide, of which 3 m. are for the conveyor belt; there are 2 general cargo berths, on the Southside, one for vessels drawing 20–24 ft., lying in 20–29 ft. and which consists of a series of 7 mooring dolphins, close to the pier. Any vessel operating here would have to discharge ashore with her own gear.

The main general cargo berth, with 31 ft. at zero at the shore end and 37 ft. at the East end is 130 m. long and can take vessels up to 160 m. in length, drawing 30 ft. There are 2 mooring dolphins, one at each end of the berth, which is ample and wide – a total width of 55 m. at this point, vessels discharge with their own gear, to trucks, the long viaduct having room for 2 trucks to pass easily. There are two 12 ton electric cranes at this point, and two 25 ton cranes are also to be installed.

To seaward, on the North side of the pier, is the bulk berth, with 37 ft. at the shore end and 50 ft. at the East end, 217 m. long and 35 m. wide. There are 2 mooring dolphins, one off each end. Discharge is by grab, on a travelling tower which moves the full length of the berth, and delivers on an endless belt to the stockpiles on shore. Installed capacity is 1,000 t.p.h., but installations are by no means complete yet and actual yields are much lower. On windy days there is a problem with the dusty Bauxite blowing, and it is advisable to keep the ship's quarters tightly shut.

The old jetty, 458 m. long, with 16 ft. at the head and 12 ft. at 125 m. in, at low water, lies 2500 m. to the South and is still in use for smaller vessels operating with their own gear. There are no lighters in the port.

MEDICAL: Attention available.

FUEL: Not available.

FRESH WATER: Presently available at the end of the old pier, 5 t.p.h., vessel supply hose.

WEATHER: *Winds* mainly West, with a yearly average of 8.3 knots but reaching 15 knots in Summer months.

Rainfall scarce, average 173 mm. distributed throughout the year.

Temperature. Summer maximum is 27° C and minimum 13°, and in the rest of the year maximum 21° minimum 8°.

Tidal range is 18 ft. 8 ins. and 6 ft.

HATCHES: According to Port Regulations, stevedores open and close hatches at commencement and end of cargo operations.

CUSTOMS ALLOWANCES: Sufficient for daily requirements only.

CREW IDENTIFICATION CARDS: Required.
CONSULS: Italian Consular Agent at Madryn. British and Spanish consuls at Trelew.
REPAIRS: Minor emergency repairs only, also divers available.
REPATRIATION: No facilities for effecting crew changes. Repatriation facilities only.
AIRPORT: Trelew distant 64 km. Scheduled flights to Buenos Aires and other cities.
POLICE/AMBULANCE/FIRE: Police and fire tel. 249. Hospital 240.
TELEPHONES: No arrangements for placing telephones on board.
SHORE LEAVE: Crew members allowed ashore but must be provided with identification cards.
DELAYS: Possible delays due congestion owing berth shortage and tide.
DEVELOPMENTS: There are plans in hand for installing a shipyard, to build vessels of up to 150,000 tons, and also for setting up a new Steel mill, but it will be some time before either develops.
AUTHORITY: Delegation of the Capitania (Harbour Administration) del Puerto de la Patagonia.

PUNTA COLORADA: 41.42 S. 64.54 W.

(See Plan Book)

The mechanical loading arm for the Iron Ore movement from Siera Yrande mines has finally been placed at Punta Colorada, a small peninsula, mid-way between Point Pozos and Point Porfido, the neck of land often being under water at high tide.
BERTH: After grinding and concentrating at the mines, which are some 25 km. due West of the coast, the slurry will be pumped to the Pelletising plant at Punta Colorada, stockpiled there and taken by conveyor some 1,600 m. to a retractile loading arm. This has a loading rate of 2,000 t.p.h., and turns on an arc permitting it to load over a length of 112 m, without shifting position of the vessel. There is 42 ft. at the berth at L.W.S.T., vessels lying due North/South or East/West alongside two dolphins in each position. There are also 6 mooring buoys for head and stern moorings.

PUNTA MEDANOS: About 280 km. South of Buenos Aires.

New deep-water port project to be completed before 1980. Expected to accept vessels up to 50 ft. draft.

QUEQUEN/NECOCHEA: 38.35 S. 58.42 W.

(See Plan Book)

(Province of Buenos Aires) "B" category port.
N.B. Refer to Argentina, Section 1.

On the Atlantic Coast, 375 miles South of Buenos Aires, Necochea, is on the right bank, and Quequen, on the left bank of the Quequen River. The ports, whose administration is centered in Quequen, are the outlet for a very rich agricultural zone.
APPROACHES: The port is at the mouth of the river, protected by two breakwaters, the western arm being 1,192 m. long, lying from N.W. to S.E., and the easterly arm 572 m. long and lying North/South. The passage between the arms is 210 m. wide, and the entrance channel proper 100 m. wide. The channel is at present dredged at 27 ft. but improving constantly.
PILOTAGE: Pilots must be applied for as usual through Agents at least 24 hours ahead, using Radio Pacheco LPD 5 on 512 kc/s. A2, since there is no radio station at Quequen. This can be done by phone from Buenos Aires or other ports if vessels are not coming from abroad.

No Pilots will come out in bad weather. The small pilot boat is painted green, with a yellow deckhead, and the Pilot comes aboard about 1.5 miles off the south end of the breakwater.
ANCHORAGES: Not advisable to anchor in bad weather due extremely dangerous winds from west through South to East. Anchorage in open sea 800 – 1500 m. from cliffs.
RESTRICTIONS: Day and night entry possible. Vessels with length in excess of 175 m. require channel navigation permit obtainable from Maritime Prefecture.
MAX. SIZE: *Admissible Draft.* The following restrictions now rule vessels up to

150 m. o.a.	26 ft. 07 in. at zero
175	26 ft. 02 in.

However, vessels lying close up to the dolphins often find less depth, as the dredgers could not work too close in. The pool inside the breakwater is at 30 ft. but as there are no buoys for mooring, it is safer for vessels to await their turn outside.
HEALTH: Free Pratique is now given only when alongside, or in the pool. Master should advise agent in advance of health situation aboard. If proceeding from another Argentine port, health inspection not required. Deratisation Certificate to be shown.
RADIO: For radio regarding free pratique, or reporting ETA call Radio Pacheco LPD 5, on 512 kc/s. There is no station here and advice to Agents can be given by phone or telegraph from Buenos Aires or other ports, also Costera del Mar de Plata (LPM).
TUGS: Two tugs must be used both on entering and leaving and these come alongside at the entrance, and are also needed for movements in the port. Both are old, however, and within sufficient power for anything other than work inside the port. Ship's lines used.

Two vessels cannot be in the entrance channel at the same time. Should the weather make it imprudent for the safety of the ship and/or tugs to make fast ropes in any position, the tugs will continue at the side of the vessel to be engaged when necessity arises. In every case tugs must be paid for, used or not, and any damage done by the non use or late engagement of the tugs will be attributable to the vessel.
BERTHING: Allotment of berths is effected by order of arrival, and vessels awaiting turn to load must do so in the outer roads until the pool inside the breakwater is fully dredged. Shippers consider the Outer roads as open sea, and will not accept Notice of Readiness until a vessel enters port.

There are only eight berths in the port, one of which is not yet in service. No work lying two abreast is possible, since the tubes will not do more than just reach, and with the restricted number of loading points only one vessel could work at a time.

Total storage capacity of grain in the port and anteport can be estimated at 600,000 tons.

Loading marks. Vessels are authorized to load to their Summer marks all year round, provided they are Northbound.

Movement inside the Port. At this port it is customary for the vessel lying second off to pay for the tugs attending her own movements. Vessels lying second off must shift to allow the inside vessel out, and then occupy the vacant berth, effect two movements, as there are only two tugs available. Of these two movements only one is charged to the vessel second off, but if either of the movements is in overtime, the extra is also charged.

Fenders. Good fenders are often needed in this port, although surge has diminished with the extension of the breakwater. It is recommended that these should be at least 3 ft. thick.

QUEQUEN SIDE
Unit 1 National Elevator "Ministro de Tomaso" (Dolphins 3/4 5/6 l.h.)

This elevator, built by the Government, has a capacity of 80,000 tons, a loading bridge with eight tubes but only four conveyor belts. Two vessels can load simultaneously.The berths consist each of two piers 10 m. wide and 70 m. apart, with two railway sidings (broad gauge) running parallel to them. There are twelve mooring bollards distributed between these landing places. A loading bridge has been constructed for the new berth from the Elevator Terminal, while it receives directly from an automatic truck discharging plant at 600 t.p.h., and being at a slight angle it is feared will interfere with a vessel of more than 140 m. long loading at Dolphins 5 and 6.
Unit II (Ocean going vessels and Ultramar Prolongation).

On this wharf which is 350 m. long there are 12 mooring bollards and two large sheds, one of 7,650 tons storage capacity and the other of 16,000 tons. There are also two railway sidings running parallel to it. On the cliff at the back of the sheds there is an elevator of 14,000 tons connected to the Ultramar berth by a loading bridge 85 m. long. The Ultramar Prolongation berth has a loading bridge with two tubes and two conveyor belts, and is fed from adjacent piles and wagons. These two bridges are connected by an underground conveyor, load rate 230 t.p.h., each two vessels being to berth here, one tube each. Unit II has been modified for the loading of cereals. Depth at zero tide is 36 ft.
Unit III (Dolphins 1 & 2 r.h.)

Beyond Unit III, in the direction of the breakwater, there are four sheds with a capacity of 29,750 tons and two piers reinforced concrete, 10 m. wide and 70 m. distant from each other. A pipe line runs alongside the pier for the purpose of eventually discharging tankers. Beyond these two piers, and at right angles to them, a breakwater of 120 m. length has been built as a further protection to ships at this berth.

NECOCHEA SIDE
Unit IV (Coasting vessels: Dolphins 1, 2 & 3 l.h. and 4 & 5 r.h.).

Situated on the western bank of the river and consists of the following berths: (Coasting vessels) A concrete pier 300 m. long with 12 mooring bollards. There are three brick-built sheds known as "Galpones A, B & C" of 5,000 tons each. Two vessels can moor at the same time, and load bagged cargo depth between 18 ft. and 20 ft.

Dolphins 1, 2 & 3 l.h. and 4 & 5 r.h. consists of three piers 18 m. wide and 70 m. apart and two piers 18 m. wide and 70 m. apart respectively. There are two direct discharge lines for Fuel oil for the Power plant.

The right-hand dolphin quays Nos. 1, 2 & 3 are used for fuel discharge, the pipelines are 12 in. diameter.

There are two sheds, Nos. 4 and 5 of 9,750 tons, one at each pier. Vessels can load bags or bulk by cutting bags on board. There are seven mooring bollards distributed between two berths. These, however, are not used now for export movement.

The old railway bridge is now used for road traffic, and the railway crosses higher up the river. The previous road bridge has been cut in the middle, and the area between the two bridges is being converted into a fishing port, which in turn will ease the congestion in port, especially on the Necochea side where trawlers and fishing vessels presently operate.

Importation of cargo. The Custom house here is authorised as a deposit zone, thus permitting the import of cargo.
WEATHER: *Winds*, average velocity is 7 knots, with 46% from N., N.E. and E., and only 29% from S.W., W. and N.W.

Rainfall. Averages 909 mm., evenly distributed.

Temperature: Summer maximum averages 26° C and minimum

14 with an absolute maximum of 39.9°, while in Winter the maximum is around 13° and the minimum 4°, with an absolute recorded minimum of minus 4°.

Tidal range is 5 ft. 2 ins. spring to 2 ft. neaps.

TANKERS: Fuel oil discharged.

DENSITY: Salt water.

FRESH WATER: Obtainable from hydrants on the wharves, vessel must supply hoses.

MEDICAL: Attention available.

FUEL: Advance notice essential as deliveries must be lightened from Buenos Aires, Mar del Plata, or Bahia Blanca.

DEVELOPMENTS: New quay in operation under the name of Ultramar II operating with 2 tubes of 400 t.p.h. capacity each, for loading cereals. Max. permitted overall length 170 m. Actual depth at foot of quay 40 ft.

Can be used for loading or discharging general cargo.

The dredging has been finished, although not to the target of 40 ft., and the present max. length admissable is 160 m., with an official figure of 26 ft. draft at zero. However, vessels lying close up to the dolphins often find less depth, as the dredgers could not work too close in. The pool inside the breakwater is at 30 ft. but as there are no buoys for mooring, it is safer for vessels to await their turn outside, from 800–1,500 m. from shore, in 50–60 ft., but with heavy winds from West through South to East they must put out to sea.

In May 1978 International Invitations for tender were issued for the following:—

1. For dredging the access channel and adjacent areas with a suction dredger to clean the channel and sandbanks.
2. To deepen the channel between profiles No. 90 and No. 123 with cutting dredger to bring the entrance to a common depth of 35 ft. in relation to zero tide and 120 m. width.

Estimated time for this work 18 months (Completion November/December 1979).

WATCHMEN: Compulsory.

HATCHES: Opened/closed by stevedores additional charge made.

REPAIRS: Minor repairs only.

REPATRIATION: Through Buenos Aires.

AIRPORT: 5 miles distant. Daily flights to Buenos Aires.

TIME: GMT minus 4 hours.

CONSULS: Danish, Italian and Spanish. Consular clearances for France and Uruguay must be effected in Mar del Plata, and must be done the day the vessel sails. Brazilian clearances have to be taken at La Plata Consular offices.

HOLIDAYS: Vessels worked every day of year.

POLICE/AMBULANCE/FIRE: Police, Necochea 2148 and Quequen 6008; Ambulance, Necochea 2350 and Quequen 6052; Fire, Necochea 4900.

TELEPHONES: No arrangements for placing aboard.

SERVICES: Any special services required, technicians sent from Buenos Aires.

SHORE LEAVE: Not permitted.

DELAYS: Daily cargo work 18 hours/day. One waiting berth available. Delays up to four days can occur in January and February.

AUTHORITY: Capitania de Puerto, Administrador de Puerto.

RIO GALLEGOS: 51.33 S. 68.59 W.

(Province of Santa Cruz) "B" category port.

N.B. Refer to Argentina, Section 1.

About eight miles up the river, 1,247 sea miles South of Buenos Aires.

PILOTAGE: Access to the channel is well buoyed, and the authorised Southern zone Pilot must be on board. There are 2 channels for entering port, the Southern channel though of less depth is preferred as it is more sheltered and the current is weaker.

ANCHORAGE: Good anchorage when awaiting tide is off Punta Loyola in 30 ft. or on the Northern coast in front of Punta El Gancho or between Punta Bustamante and Isla Deseado, this latter in the case of N.W. storms only.

In the port itself, the town anchorage is the best and is deepest in front of the packing house plant. Vessels discharge to or load from lighters, and ocean going vessels are permitted to use their own launch for connection with shore while in port.

RESTRICTIONS: Entrance to the anchorage is buoyed. The Northern Channel has a shingle bank bar 13 ft. at low water. The Southern Channel is more sheltered and the current not so strong. Rio Gallegos is a tidal port, the height of tide being as much as 40 ft. at times.

The port is characterised by the intensity of the currents, up to six knots, and should be entered on a rising tide there being only 22 ft. in the pool of the port at low water.

RADIO: For radio regarding free pratique, or reporting ETA call LPG 2 on 486 kc/s. A2. For weather reports in English tune Comodoro Rivadavia LPX 2 on 474 kc/s. at 0400 and 1800 hrs. GMT.

TUGS: Tugs are not required but there is a small tug available.

BERTHS: Apart from the freezer wharf, there is the coal wharf, T shaped, fitted with an endless belt capacity 300 t.p.h., for the loading of the coal vessels taking the coal to Plate ports. There is only 20 ft. at this wharf.

There are nine lighters with varying capacity from 120 to 400 tons, which are usually unloaded or loaded when aground at low water.

FRESH WATER: Available by barge in very limited quantities. Vessel's pumps used.

FUEL: Not obtainable.

MEDICAL: Doctor available.

REPAIRS: Workshop facilities for small repairs.

AIRPORT: Daily air service to Buenos Aires.

WEATHER: *Winds.* Characterised by constant winds from W. and S.W. averaging 16 knots during the day. In Spring and Summer 25 knots rising to 75 knots at times. Easterly winds are rare, usually with rain.

Rain. There are usually about 100 days with rain, in total 222 mm. distributed from April to October.

Temperature. Average maximum temperature in Summer is 18° C, maximum recorded being 29°, Summer minimum is 5.8° while in Winter the average maximum is 6.5° and minimum minus 11.

Tidal range is 39 ft. 4 ins. spring and 9 ft. 6 ins. neaps, tides of over 40 ft. have been registered.

CONSULS: British, Chilean, Spanish and Italian.

AUTHORITY: General Ports Administration.

SAN ANTONIO OESTE: 40.49 S. 64. 54 W.

ANCHORAGE: There is a natural deep water pool here which will allow vessels of up to 33 ft. to lie in complete shelter.

BERTHS: A new pier is being built on the North side of Villarino Point on the opposite side of the bay from the old fishing port, now abandoned. The berth is designed to take vessels up to 170 m. long, using 2 dolphins to extend the 100 m. long jetty.

The main object is to handle the movement of the Solvay Soda plant to be built here. It is unlikely that anything will be ready until 1978, although work on the port has commenced.

SAN JULIAN: 49.18 S. 67.43 W.

(Province of Santa Cruz) "C" category port.

N.B. Refer to Argentina, Section 1.

In the creek of the same name, 1,111 sea miles South of Buenos Aires.

APPROACHES: Access is well buoyed, but vessels must wait for high tide to enter.

PILOTAGE: Southern Zone Pilot must be on board.

ANCHORAGE: Best anchorage situated in front of the town, in 22 ft. at LWS. When heaving anchor care must be taken as the 3-knot current drives vessels towards the shore. Puerto Scholl is the best of several anchorages.

RADIO: For radio regarding free pratique, or reporting ETA call LPY on 428.5 kc/s. A2. For weather forecasts in English, tune LPX 2, Comodoro Rivadavia on 474 kc/s, at 0400 and 1800 hrs. GMT.

TUGS: None.

BERTH: A quay has recently been put into use, 62 m. long by 20 m. wide, and in 24 ft. with two mooring dolphins, so ending the previous use of lighters.

FUEL/FRESH WATER: Not available. In emergencies, water could be supplied by lighter in drums.

MEDICAL: Doctor, and hospital available.

CONSULS: None.

SANTA CRUZ: 50.07 S. 68.25 W.

(Province of Santa Cruz) "C" category port.

N.B. Refer to Argentina, Section 1.

On the estuary formed by the rivers Santa Cruz and Chico, 1,172 miles South of Buenos Aires.

APPROACHES: The entrance to the port is by a channel ten miles long. The Santa Cruz lighthouse and nine other beacons determine four pairs of leading lights for the approaches and entrance to the harbour, which can be entered only at high water, as both in the bar, either North or South passage, there are shoals on the leading lines, and also just before taking the anchorage in front of the town.

PILOTAGE: Southern Zone Pilot must be on board.

ANCHORAGE: The port is well sheltered and vessels can lie in up to 30-36 ft. half a mile off the town in good holding ground.

RADIO: For radio regarding free pratique or reporting ETA call LPT 2 on 441 kc/s. A2. For weather forecasts in English tune Comodoro Rivadavia LPX 2, on 474 kc/s., at 0400 and 1800 hrs. GMT.

TUGS: None.

LOADING: Loading is from lighters, which come alongside with the falling tide and return unladen on the rising tide, working two tides a day. Lighters always operate port side to vessel. There are 20 wharves or piers. Load rate is slow, say 150 tons mutton per day.

FUEL: Available in small quantities, in drums, from the local YPF agency.

FRESH WATER: Available in drums, ex lighter, to be pumped out by the vessel.

WEATHER: A dry zone, with an average of 186 mm. rain, spread over 72 days throughout the year. Wind averages 11 knots and the average, maximum/minimum temperature, Summer and Winter, is 20° or 7.9° and minus 8°, the maximum ever recorded being 34.9° Summer or 15° Winter, and absolute minimum 7.9° Summer, or minus 8° Winter.

Tidal range is 39 ft. 8ins. to 9 ft. 4 ins.

MEDICAL: Attention available.

CONSULS: None.

Australia

GENERAL:
Pilot Ladders: The Merchant Services Guild of Australia has advised that as from 1st December, 1975, Pilots will not board any ships on which the height from sea level to point of access exceeds 9 m., unless prior written assurance is given by the owner or Agent that arrangements have been, or will be, made to satisfactorily alter the ship's construction or equipment at the earliest opportunity. The only acceptable means for boarding ships with freeboard in excess of 9 m. is by a pilot ladder secured at an opening in the ship's side, or by an approved combined system of pilot ladder and accommodation ladder. The notice has been issued by the M.S.G.A. as, although the "9 m. rule" has been part of Australian and SOLAS regulations for some years, their members have found that a high number of vessels are not fully complying.
Hold Ladder Policy: For easy reference, summarised below is the Waterside Workers Federation official policy for hold ladders in Australia. Details of acceptable designs for special type vessels, i.e. car carriers, shallow 'tween deck refrigerated ships, etc. are available from Agent's office upon request.
1. *General Cargo Vessels* – The standard acceptable ladder construction would be an upper vertical section limited to 3 m. (subject to this being technically possible) with the balance of the access hold ladders being of stairway design angled to the tank top.
2. *Bulk Cargo Vessels* – The standard acceptable ladder construction would be an upper vertical section limited to 3 m. (subject to this being technically possible) with a bottom vertical section limited to 6 m., (in order to reduce damage by grabs, bulldozers, etc.) and with the balance of the access ladders between the upper vertical section and lower vertical section being angled and of stairway design with the angle being not greater than 65° in both the above classes of vessels.

ADELAIDE, S.A.: 34.51 S. 138.30 E.

(See Plan Book)

PORT LIMITS: The seaward boundaries of the port are: An area embraced by a line drawn to seawards 4 miles from Outer Harbour through the Fairway Beacon and then extended 5 miles North and South returning due East to the coastline.
DOCUMENTS: See "Melbourne".
PILOTAGE: Advance notice 24 hours, telegraphic requests through ship's Agent. VHF Channel 16. Call sign "Adel. OH" Pilot launch black hull, white deck house, "Pilot" on each side. Give pilot launch good lee and safe pilot ladder. Pilot boards 1.5 miles seaward of Fairway Beacon.
ANCHORAGE: 0.5 mile West of Fairway Beacon.
RESTRICTIONS: Controlling depth in channel is 30 ft. (9.1 m.) ISLW.

Vessels up to 28 ft. (8.5 m.) require 3 ft. (0.91 m.) keel clearance; vessels up to 28–30 ft. (8.5–9.1 m.) require 3 ft. 6 in. (1.06 m.) keel clearance; vessels over 30 ft. draft require 4 ft. (1.21 m.) keel clearance.

Night berthing/unberthing subject to Harbour Master's approval.
MAX. SIZE: Inner Harbour – length 585 ft. (178 m.) OA; draft 31 ft. (9.4 m.), subject to tide. Outer Harbour – length 853 ft. (260 m.) OA; draft 35 ft. (10.7 m.), subject to tide.
HEALTH: Including Document A in short form. Also see "Melbourne".
RADIO: Adelaide Radio VIA.
TUGS: 4 available. Use tugs wires.
BERTHING: Tug power as required by Pilot. Depth at berths 26 ft.–35 ft. (7.92 m.–10.67 m.).
STEVEDORES: No advance ETA required.
RADAR: Decca Type RR 1219 installed in new signal tower.
BERTHING:

Berth	*Length (m)*	*Depth at L.W. (m)*	*Type*	*Cargo*	*Cranes*
9	133	8.2	Ro/Ro ship ramp	Containers	
13 & 14	303	9.1	Conventional	Steel & scrap	4/6.5t travelling
25	240	9.1	Ro/Ro shore ramp	Containers, Ro/Ro	25t fixed
27	200	10.7	Bulk loading	Cereal, salt	2 loaders, 800t/hr
29	245	9.8	Ro/Ro quarter ramp	Steel	—
H	254	11.0	Bulk loading	Cement clinker	Loader, 2500t/hr
Osborne 1&2	360	9.8	Bulk	Sugar, dry & liquid bulk	6/9t travelling cranes
O.H. 2	183	10.1	Passenger terminal	Passengers	—
O.H. 4	214	10.7	Ro/Ro quarter ramp	Containers	—
O.H. 6	298	12.0	Container berth	Containers	45t container crane 60t on hook

MEDICAL: Contact Quarantine Department in ample time.
TANKERS: Vessel carrying inflammable cargoes or not gas-free restricted navigation during darkness. "Leak free" advice to Harbour Master to be given through Agent. 500 tons slop discharge facilities. 27 Berths 26 ft.–35 ft. (7.91 m.–10.70 m.). Unauthorised persons not allowed on board.
Berths:
Shell Co. Depth alongside 8.2 m.
Mobil Oil Co. Depth alongside 8.5 m.
B.P. Ltd. Depth alongside 8.5 m.
Caltex Co. Depth alongside 8.5 m.
DENSITY: Slightly denser than sea water; not affected by tide.
FRESH WATER: Through Hydrants at 12–15 t.p.h.
FUEL: Fuel oil, thin fuel oil, diesel, gas oil. 48 hours notice required. A bunkering barge capable of transporting 1,000 metric tons of bunkering oils operates in the port. The use of this bunkering barge will enable vessels to bunker without leaving their loading berths or using road tankers.
DEVELOPMENTS: The navigation channel at Outer Harbour is being deepened from 10 m. to 12 m. LW as far in as the container berth. Also a swinging basin opposite the berth is being dredged to 12 m. LW and width of 460 m.
GANGWAY/DECK WATCHMEN: Optional except for white spirit tankers. Cost varies according to time of shift.
OPENING/CLOSING HATCHES: Carried out by crew.
CERTIFICATES:
Last Port Customs clearance.
Ship's Register.
Load Line Certificate.
Safety Radio Certificate.
Safety Equipment.
Light Dues Receipt.
Ship's Articles (British Vessel).
CUSTOMS ALLOWANCES: Each Crew member 200 cigarettes or 40 cigars or 8 oz. tobacco. Limited amounts spirits per man.
CARGO GEAR: Accordance Australian Regulations. See "Melbourne".
IDENTIFICATION CARDS: See "Melbourne".
CONSULS: The following countries are represented:

USA
Austria
Belgium
Denmark
Finland
France
Germany
Greece
Guatemala
Italy
Japan
Lebanon
Liberia
Netherlands
Norway
Peru
Philippines
Portugal
Sweden

REPAIRS: All repairs possible.
DRY DOCKS: None.
REPATRIATION: Available.
AIRPORT: Adelaide 8 miles, regular airlines.
TIME: GMT plus 9 hours 30 minutes.
HOLIDAYS: Xmas Day, Waterside Workers' Picnic Day (late January), Good Friday, Anzac Day (25th April), Adelaide Cup Day (15th May), Eight Hours Day (2nd Mon. October). Restricted holidays, Boxing Day, New Year's Day.
TELEPHONES: Port Adelaide Police 475466, Ambulance (Wharf) 461616, Fire Brigade 471515.

Note: $60 connection fee plus cost of calls.
SERVICES: Garbage disposal, cleaning out and fitting out and compass adjusting.
AUTHORITY: Dept. of Marine and Harbors.
AGENT: Patrick Agencies, POB 107. 15 Divett Street, Port Adelaide SA 5015. Tel. 47-4655. Telex AA. 82624. Cables: 'Rikpat Adelaide'.

ALBANY, W.A.: 35.02 S. 117.53 E. (See Plan Book)

PORT LIMITS: All the waters of King George Sound and Princess Royal Harbour Westward of a line drawn from Herald Point to Bald Head.
DOCUMENTS: See "Melbourne".
PILOTAGE: Compulsory service provided by State Harbour and Light Department. Pilot boards vessel about 1.5 nautical miles East of King Point.
ANCHORAGE: 1.5 miles (2.4 km.) East of Possession Point (or in Frenchman's Bay if going to Whaling Station or for shelter).
RESTRICTIONS: The entrance channel from King George sound to Princess Royal Harbour has a width of 550 m. land to land. The Navigation channel therein being 145 m. wide, with a depth of 10.06 m. LWOST. Depth of swinging basin in the harbour is 10.06 m. and vessels with a draft of 9.45 m. can work the port. Although some margin is allowed at the Harbour Master's discretion dependent on weather and tidal conditions, (HHW 0.9 m.). Vessels can be berthed day or night.
HEALTH: Master should supply answers to a prescribed questionnaire 24 hours before arrival. Details of the questionnaire can be obtained from vessel's Agent and answers should be radioed to Agent who will arrange medical pratique.
VHF: Call sign is "Albany Port" and limited service is available on Channels 6, 12 and 16 on pre-arranged schedules.
TUGS: Motor tug available, bollard pull approx. 14 tons.
BERTHING:
King George Sound: Safe anchorages are available and at Frenchman's Bay, a mooring is provided for vessels loading whale oil in bulk from the Whaling Station by means of a submarine pipeline.

Princess Royal Harbour: The following berths are available: Deepwater Jetty: No. 1 Berth (South side) length 240 m., depth 10.06 m. No. 2 Berth (North side); length 180 m., depth 7.62 m. (no fendering).

Land Backed Wharf: A continuous wharf face of 608 m. allocated into 3 berths. No. 1 – length 209 m., depth 10.06 m. No. 2 – length

172 m., depth 10.6 m. No. 3 – length 227 m., depth 11 m. There is no swell at any of the berths.

The jetty berths are served by road transport only whilst the wharf berths are served by both road and rail transport. The rail transport is connected with the Western Australian Government Railways state system.

Berth uses: No. 1 Jetty Berth, for receival of petrolum products and the provision of oil bunkers. No. 1 berth has a transit shed with a floor area of 4,300 sq.m. and is used mainly for general cargoes. Whilst the berth has not been constructed to receive Ro/Ro vessels, it has been possible to work them at this berth.
No. 2 Wharf Berth, for the loading of bulk grain. The facilities provided by Co-operative Bulk Handling Ltd. have a loading rate of 400 tonnes per hour. The grain is transported from the terminal to a shipping gallery which is at the rear of the wharf. The gallery is 127 m. long with 6 loading booms, each 17.7 m. long at 17.1 m. centres.
No. 3 Wharf Berth, is a general purpose berth and has been designed to receive Ro/Ro vessels and container traffic. Holding yards for live sheep are erected at this berth capable of holding sheep.
FRESH WATER: Available all berths. Rate 60–80 tonnes/hour.
STEVEDORES: No ETA required. Private companies.
Normal Working Day: Day Shift (Ordinary Time) 0800 to 1600 hrs. with meal break 1200 to 1300 hrs. Shift extension through to 1700 hrs. any night with selected nights through to 1900 atdouble time. Evening Shift (Time and Half) 1800 to 2400 hrs. Night Shift (Double Time) 0000 to 0700 hrs. Saturday (Double Time) 0000 to 0700 hrs, 0800 to 1700 hrs. (Lunch break 1200 to 1300 hrs.). Sunday (Double Time and Half) 0800 to 1700 (Lunch Break 1200 to 1300 hrs.) and 1800 to 2400 hrs.
FUEL: Marine fuel oil and light marine diesel oil is available at all berths. Rated average at 150 t.p.h. (fuel) and 100 t.p.h. (diesel).
REPAIRS: A slipway of 300 tonne capacity is available. Small repairs only are dealt with by Board of Trade Engineers. Fitting out for grain loading is done by several contractors.
CERTIFICATES:

Last Port Customs Clearance.
Ship's Register.
Load Line Certificate.
Safety Radio Certificate.
Safety Equipment Certificate.
Light Dues Receipt.
Ship's Articles (British Vessel).

CUSTOMS ALLOWANCE: Each crew member 200 cigarettes or 40 cigars or 226.8 gm. tobacco. Limited amounts spirits per man.
IDENTIFICATION CARDS: See "Melbourne".
TIME: GMT plus 8 hours.
HOLIDAYS: As for Fremantle except W.W.F. picnic day is late January.
CARGO GEAR: Vessels use own lifting gear. Wharf gear includes 2 mobile cranes (8 tonne and 5 tonne) 4 fork lift trucks (2×3,600 kg. and 2×2,500 kg.).
AIRPORT: 11 km. from Port.
DEVELOPMENTS: A contract has been awarded which on completion will result; outer end of approach channel 12.8 m. decreasing to 12.2 m. in entrance channel turning basin and No. 3 wharf berth. Nos. 1 and 2 wharf berths will be deepened to 10.4 m. The 2 jetty berths will remain unaltered.
AUTHORITY: Albany Port Authority.
AGENT: Patrick Agencies, Box 525 PO, Port Road, Albany, Western Australia, 6330. Cables "Rikpat". Tel. 413538.

ARDROSSAN, S.A.: 34.26 S. 137.55 E.

DOCUMENTS: See "Melbourne".
PILOTAGE: Not compulsory but available and recommended.
RESTRICTIONS: Max. size 20,000 d.w.t. for berthing and loading.
BERTHING: BHP Jetty length 3,055 ft. berth length 800 ft. at "T" head with 6 dolphins. Depth 27 ft. MLWS. Belt conveyor system. Fixed chute from conveyor system necessitates vessel warping along quay head during loading. Loading rates: dolomites 2,600 t.p.h.; wheat 350 t.p.h.; barley 340 t.p.h.; salt maximum 600 t.p.h. Height of chute above LW – 36 ft. 06 ins.
TIDE: Average rise and fall 6–8 ft., max. 10 ft. at spring tides.
GRAIN: Vessels loading bulk grain must be fitted out and passed by Navigation Dept. prior to arrival. Surveyors will attend vessel during loading, travelling by road from Adelaide.
VHF/TUGS/FUEL: None.
STEVEDORING: Arranged with private companies.
FRESH WATER: Limited quantities only. Delivery rate about 7 t.p.h.
AUTHORITY: The Broken Hill Pty Co. Ltd. Whyallla. Department of Marine and Harbours, Adelaide.
AGENT: Sub-agent of Patrick Agencies, Adelaide.

BALLAST HEAD, Kangaroo Is.: 35.45 S. 137.48 E.

In Eastern Cove, Kangaroo Island. Small private bulk loading installation from which charter vessels load gypsum for shipment to factories in Eastern Australian states. No facilities for discharging cargo and no Customs, health or other government departments' facilities available.
DOCUMENTATION: For vessels chartered to carry gypsum to Eastern Australian ports, Bills of Lading prepared on completion of loading.
PILOTAGE: No Pilots resident at Ballast Head but pilotage can be arranged through Harbour Master, Port Adelaide if required.
ANCHORAGE: Sea approach is unobstructed, with deep water anchorage and turning basin of Eastern Cove, 4.5 km. wide and extending 0.8 km. South of berth. Minimum depth about 10.5 m. Sand bars exist immediately South of berth but well inside line of dolphins.
RESTRICTIONS: Vessels may proceed to anchorage at any time, but can berth only during daylight hours. Loaded vessels can leave berth or anchorage at any time without concern for tide conditions.
HEALTH: Pratique must be obtained at Port Adelaide.
TUGS: No tugs are available, but can be arranged from Port Adelaide, if required. However, a launch is available for running ships' lines, and must be used.
BERTH: The berth consist of a line of 8 dolphins running North/South, 600 ft. (183 m.) overall length forming a T-head jetty with loading conveyor gantry. Depth of water alongside 26 ft. (7.9 m.) LWOST. Berthing signals by radio instruction or mast head.
MAX. SIZE: Jetty can accommodate vessels up to about 10,000 tonnes d.w. Maximum length 122 m. Maximum breadth 16.5 m. Ships must exercise extreme care in berthing to avoid damage to dolphins or head frame.
LOADING FACILITY: Loading equipment consists of conveyor system to fixed loading gantry supporting luffing boom conveyor. Discharge from boom conveyor feeds to gimbal-mounted chute that can be pivoted mechanically in any direction up to 20° off vertical to trim to square of hatch. Boom conveyor operates only in horizontal position and loading chute does not telescope. Fixed loading gantry situated at centre of line of berthing dolphins. Maximum workable distance from wharf edge to centre line of loading unit – 7.9 m. Distance from low water level to outlet end of loading chute in loading position – 5.8 m. Maximum handling rate of rock gypsum on conveyor system, 870 t.p.h.
RADIO: Ship-shore VHF radio. Call sign "Ballast Harbour". Frequencies, 150.80 mc/s. for distress and calling; 156.60 mc/s. for working.
Arrival advice: At least 8 hours notice of ETA is required to S.A. Gypsum Adelaide Office, tel. 454751 or after hours, Adelaide 356.5606 or Kingscote 2.2287.
MEDICAL: Doctor available at Kingscote, 40 km. distant. Hospital also at Kingscote.
FRESH WATER: None available.
FUEL: No facilities available.
GANGWAY/DECK WATCHMEN: None required.
OPENING/CLOSING HATCHES: Carried out by crew.
CONSULS/REPAIRS/DRYDOCKS/REPATRIATION: No facilities available.
AIRPORT: Local airport approximately 32 km. distant. Regular air service to Adelaide – at least one flight daily.
TIME: 9 hrs. 30 mins. in advance of GMT from March to October inclusive. One hour Summer saving time operates from November to February inclusive.
HOLIDAYS: Loading carried out on any day but at least 24 hours notice of ETA required for loading on public holidays.
POLICE/AMBULANCE/FIRE: Police station, Kingscote 2.2018; Ambulance, Kingscote 2.2037 or 2.2028; Fire, Kingscote 2.2200.
TELEPHONES: No arrangements exist for placing telephones on board.
SERVICES: None available.
DELAYS: Berth accommodates only one vessel at a time, but once berthed the loading continues without break until completion except for the time taken to shift ship from hatch to hatch and check draft.
AUTHORITY: S.A. Gypsum, Division of CSR Ltd.

BARROW ISLAND, W.A.: 20.49 S. 115.33 E.
(See Plan Book)

LOCATION: The Barrow Island Tanker Terminal, owned and operated by West Australian Petroleum Pty. Limited, is a crude oil loading installation located on the East side of Barrow Island, Western Australia. The tanker moorings are located approximately 32,400 ft. (9,875 m.) offshore at Lat. 20° 48′ 52″ S, Long. 115° 33′ 04″ E. Refer to current hydrographic chart AUS-742 for further information.
DOCUMENTS: Refer to "Melbourne" — Also see "Health".
MINIMUM REQUIREMENTS:
Minimum Requirements for Tankers Loading:

1. A Mooring Master is assigned to tankers calling at Barrow Island to assist in mooring and unmooring, in connecting and disconnecting the submarine loading hose, and to advise on matters concerning the safety of the tanker and terminal facilities. The Master of the ship shall be in full command at all times. In the event of negligence on the part of the Mooring Master causing damage to or loss of the vessel, the Owners and Charterers of the vessel indemnify the Mooring Master and West Australian Petroleum Pty. Limited against all claims by the vessel's Owners, Charterers and third parties arising therefrom.
2. West Australian Petroleum Pty. Limited may, at its discretion without prior written approval, refused to moor or load any tanker that does not conform to the minimum requirements listed below. The Company also reserves the right to reject any tanker, that in the judgement of the Mooring Master, is deficient in any manner whatsoever. The onus is exclusively on the Master, Owner and Charterer of each Tanker entering

the Terminal to ensure that the vessel is sea-worthy and that all equipment is and remains in good working order. Failure by WAPET to reject any vessel not meeting these requirements will not relieve the vessel's Owner or Charterer of liability.

Vessels which could possibly contravene pollution regulations (both Commonwealth and State) will not be accepted.

3. Tankers exceeding the following dimension cannot be accommodated at the sea berth:
   a. Deadweight tonnage (loaded) — 71,000 tonnes.
   b. Overall Length — 820 ft. (250 m.).
   c. Moulded depth — 58 ft. (17.67 m.)
   d. An under-keel clearance of not less than 5 ft. (1.56 m.) must be maintained.
4. Tankers must have at least one set of mooring bits on the port and starboard sides at the after end of the main deck and a minimum of four sets of mooring bits on the poop deck to which mooring lines and/or wires can be hove tight and made fast.
5. Both bow anchors are required to have a minimum of ten shackles of chain. All anchors and chains are to comply with the requirements of a Classification Society recognised by the Australian Department of Transport.
6. Tankers should have sufficient mooring ropes and/or wires so that single or doubled up they have a total breaking strain of 80 tonnes to each of the six mooring buoys. Six such lines or combinations not less than 120 fathoms in length are required.
7. The tanker's derrick or crane must be capable of lifting the 5 tonne submarine hose on the starboard side.
8. Tankers are required to furnish the necessary personnel to perform all work involved in the connecting and disconnecting of the cargo hose.
9. Tankers manifolds must be capable of being bolted to the 10 in. U.S.A.S. flanges used by West Australian Petroleum. One adaptor from 10 in. (25.4 cm.) diameter U.S.A.S., flange pitch circle diameter 14.25 in. (36 cm.) to 10 in. (25.4 cm.) diameter British Standard, flange pitch circle diameter 15 in. (38 cm.), known as American Standard Association — A.S.A.
10. Tankers are required to arrive ballasted to at least one quarter of their summer deadweight. It is recommended that they arrive with clean ballast and preferably deballast concurrently with loading. If this is not possible then tankers must be capable of loading at least one third of their summer deadweight tonnage before deballasting operations begin.
11. Tankers are required to victual and provide sleeping accommodation for the Mooring Master and Operators and to victual only, the three man launch crew.

READINESS: Notice of readiness is accepted:

(a) *When the Marine Terminal is available:*
when the vessel is all fast in the berth, i.e. all lines secured to the buoys and preventers made fast.

(b) *Where the berth is not available:*
6 hours after the vessel drops anchor at a nearby anchorage. Laytime ceases for the period of time taken for the vessel to move from the anchorage and is resumed when the vessel is all fast at the berth.

(c) *Where a vessel with inadequate lights arrives at night:*
6 hours after daybreak following arrival or when the vessel is all fast at the berth – whichever occurs first.

PILOTAGE: A terminal Mooring Master will meet and board tankers bound for the Island Tanker Terminal in an approximate position with tanks (conspicuous) bearing 300° and two nautical miles off the moorings. Tankers waiting to berth etc. are requested to anchor in this position.

ANCHORAGE: See "Pilotage".

RESTRICTIONS: Vessels equipped with adequate searchlights may be berthed during the hours of darkness. Two × 12 in. (30 cm.) reflector diameter searchlights, one fitted to each port and starboard wing of the bridge in such a manner as to provide a wide scanning range, are considered adequate. Tankers not fitted with searchlights may berth in daylight hours only.

MAX. SIZE: The minimum depth of water in the vicinity of the berth is 43.3 ft. (13.2 m.) and an under keel clearance of 5 ft. (1.56 m.) is required at all times. Also see "Minimum Requirements" – No 3.

HEALTH: Tankers arriving from foreign ports must make prior arrangements for quarantine and customs clearance through their agents. Port Walcott, Western Australia, is the nearest port where customs and quarantine clearances can be obtained.

RADIO: All tankers proceeding to the Barrow Island Terminal shall notify the West Australian Petroleum's Perth Office, telephone No 325-0181 (contact available 24 hours/day) or cable address WAPET, Perth, during normal business hours, their ETA, not less than 96 hours before arrival, amending or confirming this ETA at intervals of 48 and 24 hours prior to arrival. A final ETA is to be confirmed 12 hours before arrival at Barrow Island. Failure to comply with the above procedure may result in a Mooring Master not being available on the tanker's arrival. Quantity and condition of ballast on board should be advised in original ETA message.

During normal daylight working hours, the Company's Mooring Master, Barrow Island, can be contacted by means of the International Maritime VHF. Frequencies in use are:

Channel 16 156.8 mc/s. – safety and calling
Channel 14 156.6 mc/s. – terminal operations, ship/shore
Callsign 'Barrow Island'
Channels 8 & 12 are also fitted

At times other than normal working hours, contact may be made by pre-arranged scheduling. In all events tankers are required to tune their VHF sets to Channel 16 when within 100 nautical miles of Barrow Island.

TIDES: Slack water at the terminal moorings occurs approximately 1 hour after HW and LW. The direction of the flow is approximately 245° flood tide and 065° ebb tide, and attains a rate of approximately 1 knot at springs.

Times and heights of high and low waters occurring at the Terminal Moorings are to be published in the Australian National Tide Tables effective 1978 (supplement). The above tidal information can only be taken as a guide as times, direction, rate and heights cannot be implicitly relied upon.

BERTHING: West Australian Petroleum will furnish a suitable launch and crew to secure and cast off the tanker's lines to the mooring buoys.

Tankers must have at least 2 sets of mooring bits on the port and starboard sides at the after end of the main deck or, alternatively a mooring winch and 1 set of bits, and on the poop deck, in addition to mooring winches, 4 sets of mooring bits to which mooring lines and/or wires can be hove tight and made fast.

To facilitate berthing, 2 mooring lines on the after end of the main deck, and 2 mooring lines on the poop deck should be securely joined together giving an effective length of approximately 240 fathoms (440 m.).

In the case of self-tensioning winches, each should have approximately 70 fathoms (128 m.) of wire or rope flaked out on the deck ready for running by the mooring launch to the mooring buoys.

Permanent 5 in. circumference wires are fitted to No. 1, 2, 3 and 6 mooring buoys. These wires are provided to supplement the tanker's own lines relative to the prevailing weather conditions at the time. These wires are fitted with 160 ft. (48.7 m.) of 3.125 in. (9.6 cm.) wire and 4.5 in. × 100 ft. (110 cm. × 30 m.) terylene messengers. A good ship's rope messenger is required to bring the messenger to the tanker's winch drum.

West Australian Petroleum reserves the right to refuse to load any tanker that is deficient in any manner whatsoever or presents a pollution hazard.

DEBALLASTING: There are facilities for receiving ballast from vessels loading at Barrow Island.

Tankers are required to arrive ballasted to at least one quarter of their summer deadweigh tonnage and with propeller submerged.

Owing to the time factor involved in pumping dirty ballast ashore, it is recommended that tankers arrive with clean ballast and preferably deballast concurrently with loading.

However, if required, ballast on arriving tankers may be pumped to shore using ship's pumps through the submarine line then through a deballasting line to the ballast receiving pond. The following deballasting procedure is used at the Terminal:

After the hose has been connected, at least one-third of the summer deadweight tonnage must be loaded before deballasting. Part of this oil is to be used to displace ballast from the submarine line. The line displacement of the submarine loading line is approximately 12,250 barrels (1,680 tonnes).

It is necessary to load at least one-third of the summer deadweight tonnage before deballasting operations begin in order to keep the ship in as heavy a condition as possible and thereby minimise the effects of sudden changes in sea and weather conditions.

When the preceding operation is complete, deballasting operations start. When the oil-water interface is detected onshore, the stream is diverted from the crude oil storage tanks to the ballast receiving pond. Pumping of the ballast continues until all ballast is discharged from the ship. Pressure at the ship's rail during deballasting should not exceed 100 p.s.i. At this pressure the discharge rate is approximately 1,120 tonnes per hour.

When all ballast is discharged Barrow Island crude oil previously loaded is pumped into the line in order to displace all ballast from the submarine pipe-line. When approximately 11,000 bbls (1,500 tonnes) of crude has been pumped the Mooring Master and the shore Terminal are to be advised.

When the water-oil interface is detected ashore, the stream is then diverted to the shore tanks and the ship's pumps are requested to be stopped. During the displacement operations, pumping rates should be kept as high as possible to keep line contents in a turbulent condition in order to sweep the lines as clean of water as possible.

LOADING: The tanker should, if possible, arrive with the derrick or crane rigged on the starboard side and in all respects ready to lift the deck hose, hanging off chain, etc., from the mooring launch.

The onshore terminal facilities consist of five 200,000-bbl capacity floating roof storage tanks, two gas engine driven centrifugal loading pumps with necessary auxiliary equipment. The loading pumps are rated to deliver a maximum of 17,000 bbls per hour of crude oil to tankers with a nominal pressure of 10-25 p.s.i.g. at the ship's side.

Barrow Island crude oil has an approximate API gravity range of 35.5 to 37.1 and an approximate temperature range of 74°F to 98°F (23°C – 37°C).

The sea line delivering the oil is 20 in. O.D. × 0.375 in. (51 cm. × 9 mm.) steel pipe with a 2 in. (5 cm.) thick concrete external coating. The line is terminated with 200 ft. (61 m.) of flexible submarine loading hose consisting of 150 ft. (45 m.) of 16 in. (40 cm.) and 50 ft.

(15 m.) of 12 in. (20 cm.) hose. The sea end of the pipe-line is marked with a white spar buoy, and the pick-up end of the flexible hose is marked with a white cone buoy.

The submarine line is left full of crude oil between tanker arrivals. (After picking up and connecting the hose, the system will be pressurised to about 25 p.s.i.). After the hose has been hoisted and secured at the ship's rail, the blank flange on the end of the hose assembly is removed and the hose connected to the tanker's manifold by the deck hose and the adaptor spool assembly previously delivered to the tanker by the mooring launch.

During loading operations, a responsible deck Officer must be present to approve the hose connections and supervise the tanker's crew members in this work.

Two deck hoses, one 25 ft. × 10 in. (7.6 m. × 25 cm. I.D.) and one 18 ft. × 10 in. (5.4 m. × 25 cm.). Reducers of 14 in. to 12 in. and 12 in. to 10 in. are available (36 cm. to 30 cm. and 30 cm. to 25 cm.).

All flanges are U.S.A. Standard, formerly known as American Standards Association. An adaptor from 10 in. diameter U.S.A.S. (flange pitch circle diameter 14.25 in.) to 10 in. diameter British Standard (flange pitch circle diameter 15 in.) is available.

The Mooring Master is to be advised when 200 tonnes is required to complete loading so that the pump motors can be eased down slowly, and again at 50 tonnes when the pumps will be stopped and loading completed by gravity. On completion of loading, the manifold valve is to be closed slowly to minimise the surge of oil in the pipe-line and the consequent quick build up of back pressure.

Portable radios are supplied for communication between tankers and the Terminal. To minimise the possibility of a dangerous position arising due to an undetected radio failure, tankers are required to keep an hourly test call schedule with the Terminal at which time they should advise the Terminal of the back pressure at the ship's rail.

CAUTION – When all hose connections have been made the Cameron valve and the ship's manifold are opened and gravity loading takes place until such time as the ship's checks are completed and clearance is given to start the loading pumps. Whilst loading, the flow of oil from the shore pumping station via the submarine pipe-line is not to be shut off by closing ship's valves or the pipe-line valve without prior approval of the Mooring Master. At least one tank is to be fully open to the inflow of oil from the submarine pipe-line at all times, and in order to reduce back pressure as many tanks as possible should be open during loading. In all events the back pressure at the ship's rail is not to exceed 100 p.s.i.

GENERAL: Ships must load promptly and leave the mooring Terminal promptly or risk demurrage charges which may accrue to other vessels waiting and ready to load.

Medical facilities, telephone, Consuls or Foreign Government Representatives, bunker oil, fresh water, cargo or tank inspection services, and facilities for ship's laundry, stores or repairs are not available at Barrow Island Tanker Terminal.

Ship's crews cannot be accommodated ashore on the Island.

The dumping of any rubbish overboard is prohibited.

AGENCY: No ship's agent's services are furnished by West Australian Petroleum.

BOTANY BAY, N.S.W.: 34.00 S. 151.14 E.

(See Plan Book)

DOCUMENTS:
2 Crew Lists (Form M. & S. II).
Stores List (Form 42 A).
Personal Effects List (Form 5).
2 copies Health Report (Form A Q360).
3 copies Ports of Call List (Form C & E 886).

If vessel has an animal aboard as ship's pet, Master will also be required to complete Forms QA 4 and QA 5.

PILOTAGE: Compulsory. Ordered by Agent basis Master's ETA. Pilot boards outside Botany Bay heads. Vessels waiting for Pilot not to proceed West of 151.15 E. Pilot vessels fitted with VHF for communication with other ships. Watch maintained on Channel 13 while at sea and messages conducted on Channel 6.

ANCHORAGE: Inside Heads for vessels up to 31 ft. draft. In bad weather vessels should not anchor but put to sea.

RESTRICTIONS: Vessels not berthed after sunset. Mooring normally effected two hours before HW.

RADIO: Sydney Radio. VHF to Harbour Control, Sydney. Also see "Sydney – VHF".

MAX. SIZE:

Kurnell	No.	1	Length	600 ft.	Draft	32 ft.
	,,	2	,,	650 ft.	,,	35 ft.
	,,	3	,,	780 ft.	,,	38 ft.

SBM Terminal, up to 42 ft. draft.

TUGS: 24 hours notice required. Tugs join vessel at sea buoy. Ship's lines used.

BERTHING: *Kurnell Jetty:* Operators: Australian Oil Refining Pty. Ltd. Finger pier with 2 berths; No. 1 – Eastside No. 2 – Westside. Crude 1 × 26 in. 1 × 18 in. lines – 8 in. hoses. Fuel 1×24 in. 1×12 in. lines – 8 in. hoses. White 6 in. – 16 in, Bunkers and FW ex-wharf. Slop facilities up to 8,200 tons (1,000 t.p.h.).

Kurnell No. 3 Berth: Operators: Australian Oil Refining Pty. Ltd. Vessel moors using both anchors frd. and ropes to 5 buoys in semi-circle (astern). Hoses connected midships – 2×12 in. to submarine line (crude). Bunkers, fuel and diesel. FW 70 t.p.h. ex-pipe-line.

SBM Terminal: A single point mooring for up to 80,000 d.w.t. tankers, at 12.8 m. draft, located just inside bay entrance. Crude: 1×16 in., 1×12 in. hoses, up to 1,500 t.p.h. No bunkers available. Fresh water ex-tug at 100 tons per lift.

DENSITY: 1025.

FRESH WATER: Hose at jetty. Pipe-line from Kurnell No. 3 privately owned by A.O.R. Ltd.

FUEL: Marine Fuel and Diesel Oil. No barging available, deliveries by pipe-line only.

FIRE PRECAUTIONS: Normal restrictions.

GANGWAY/DECK WATCHMEN: None available.

IDENTIFICATION CARDS: See "Melbourne".

DEVELOPMENTS: Work commenced on development of Botany Bay as an ancillary port of Sydney. First stage includes dredging entrance to 70 ft. depth, and building an armoured embankment to reduce wave effect in the Bay.

The new container terminals at Botany Bay will be capable of accommodating the world's largest container vessels. Plans revealed recently are for a 6-berth container complex with depths alongside wharves of 50 ft. (15 m.). A total area of 150 acres has been set aside for the container terminals. The berths will each have a length of approximately 1,100 ft. The first of the new terminals will be available in 1979 with the remainder brought into operation progressively.

Facilities will also be provided for dry and liquid bulk cargoes, including a bulk liquids berth.

REPAIRS: Most repairs. Ships not allowed to be immobilised.

DRY DOCKS: Nil.

AIRPORT: 4 miles – regular airlines.

TIME: GMT plus 10 hours.

HOLIDAYS: Cargo worked all days.

POLICE/AMBULANCE/FIRE: Tel. 000.

TELEPHONES: At Wharf and Kurnell No. 3. AOR Ltd.

SERVICES: Compass adjusting only.

DELAYS: Normal only.

AUTHORITY: Maritime Services Board of NSW.

AGENT: Patrick Agencies, Head Office, Box 3918 GPO, Sydney, NSW 2001.

BOWEN, Queensland: 20.01 S. 148.15 E.

(See Plan Book)

PORT LIMITS: The Port of Bowen limits is an area comprised within a line commencing at Cape Edgecumbe and proceeding thence to Cape Gloucester.

DOCUMENTS: See "Melbourne".

PILOTAGE: Vessels requiring a Pilot should radio Agent giving sufficient advance notice. No VHF communication presently available. Pilot boarding ground is 1 mile outside Fairway Buoy, a distance of 4 miles from the port. Pilot requires ladder, rigged 5 ft. above the water, man-ropes rigged and heaving line ready.

RESTRICTIONS: Vessels will not be berthed at night. It is necessary for vessels to be at Pilot boarding ground 1 hour before sunset. Vessels should have at least 1 ft. keel clearance in the swinging basin.

Depths available: South Entrance Channel 23 ft. LWOST;
North Entrance Channel 12 ft. LWOST;
Swinging Basin 22 ft. LWOST.
Vessel may sail at night.

MAX. SIZE: Length about 540 ft. overall. Berth depth from 22 ft. 9 in. to 30 ft. LWOST.

HEALTH: See "Melbourne".

RADIO: Vessels arriving from the North use Townsville Radio. Vessels from the South use Sydney and Brisbane radio stations.

TUGS: Tug available for berthing and departure. Motor launch used to run lines to berth.

BERTHING: Normally carried out at high water.

Berth	*Length (Metres)*	*Depth (Metres)*
No. 1.	203.00	7.6
No. 2.	203.00	7.6
No. 3.	167.64	9.1
No. 4.	152.40	6.9

SPECIALISED CARGO-HANDLING FACILITIES: Berth No. 3 is specially equipped for the handling of the export of bulk cargoes (coal, ore, grain, mineral, sands, etc.) by a ship loader equipped with telescopic chute and jet slinger fed by a belt conveyor from stockpile areas. Loading rate 610 t.p.h.

STEVEDORES: Ordered by Agent. Port quota is 55 men which allows 3 gangs. Loading rates: coal 600 t.p.h.; bulk tallow 60 t.p.h.; frozen meat 7 tons per gang/hour; hides 8 tons per gang/hour; bagged bone meal 11 tons per gang/hour.

A ship loader with loading belt conveyor, telescopic chute, and jet slinger, with loading capacity of 700 t.p.h., can handle coal, minerals and maize.

MEDICAL: Hospital facilities available. No advance notice required. Tel. No. 29.

DENSITY: Average density at berths 1025 to 1027.

FRESH WATER: Available at all berths up to 50,000 gallons/hr.

FUEL: Oil bunkers not available but small quantities can be obtained from Townsville by road or rail tankers.

GANGWAY/DECK WATCHMEN: Watchmen available, but not compulsory.

OPENING/CLOSING HATCHES: Can be performed by crew or stevedores.

REPAIRS: Engineering and welding services available.

DEVELOPMENTS: A five-year development plan includes improvement of coal export facilities, and building a single buoy mooring terminal for bulk liquid carriers.

Plans call for the port to be dredged to 70 ft. for VLCCs in the future.

AIRPORT: 3 miles away with connecting services to major. Australian airports.

HOLIDAYS: Christmas Day, Good Friday, Labour Day, and Picnic Day; no work performed on these days.

POLICE/AMBULANCE/FIRE: Police, tel 861333; Ambulance, tel 861211; Fire Brigade, tel 861444.

TELEPHONES: Ship-board telephones can be rented.

AUTHORITY: Bowen Harbour Board.

AGENT: Sub-agent of Patrick Agencies, Brisbane.

BRISBANE, Queensland (including Fisherman Islands, Hamilton, Pinkenba): 27.27 S. 153.04 E.

(See Plan Book)

PORT LIMITS: A vessel is considered an "arrived vessel" when it is at the Pilot boarding grounds off Caloundra.

DOCUMENTS: See "Melbourne".

PILOTAGE: Notify Agent approximately one week in advance. Confirm ETA to Duty Harbour Master 24 hours before arrival at pilotage ground, plus max. draft. Master of vessel to radio ETA Pilot boarding ground 8 hours before arrival. Messages should be addressed: Shipserv Caloundra Signal Station.

Contact Caloundra Signal Station by VHF Channel 16 when within range. Pilot boards 3 to 6 miles S.E. of Cartwright Point. Pilot vessel white hull with words PILOTS in black letters. Orange superstructure. Place ladder about 6 ft. from water.

Pilot ground is 42 miles from entrance to river. River then navigable to ocean going vessels for 14 miles from the mouth.

Same Pilot remains to berth vessel. Pilotage time about 5 hours.

APPROACHES: Good navigation conditions in Moreton Bay except in exceptionally heavy weather in N.W. channel. Minimum depth in N.W. channel 42 ft., and N.E. channel 25 ft., in Bar Cutting 38 ft., in Swinging Basin at Luggage Point 40 ft., to Hamilton 30ft., and to Bulimba Point 27 ft. (all LWOST). Dredged channels in Moreton Bay minimum 1,000 ft.. width. River Cuttings 400 ft. width except cutting between entrance beacons and middle beacons of Bar Cutting, which 500 ft. width.

In Moreton Bay and Brisbane River the mean spring rise is 6 ft. 7 in. above LWST and mean neap rise is 5 ft. above LWST. The lowest neap tide 4 ft. above LWST and maximum spring tide 8 ft. above LWST. The visibility generally good except in cyclonic weather when heavy rain.

RESTRICTIONS: Berthing times dependent on vessel's draft in relation to state of tide.

MAX. SIZE: Waterline length in river 750 ft. at 32 ft. draft (special provision made for larger vessels, especially when light draft condition preparing entering Graving Dock). Moulded breadth 105 ft., draft at HWOST for tankers 40 ft.; for cargo vessels 32 ft. No limit on height at present – see "Bridges".

HEALTH: See "Melbourne". Doctor boards at river entrance or at berth. Available 24 hours per day.

RADIO: Most traffic channelled through VIB, coastal radio station Brisbane. VHF Channel 16, 156.6 mc/s. and 156.8 mc/s.

RADAR: Continual watch kept at Caloundra Head, and Lytton Hill Signal Station.

TUGS: Six tugs available up to 2000 h.p. and 33 tons bollard pull. Tugs are privately owned. Tugs join vessel approaching the berth, or as may be required elsewhere in the river. Line boats available.

BERTHING:

Berth		*Length*	*Depth LWOST*
Bulimba Reach			
Capricorn Wharf	No. 1	550 ft.	30 ft. 6 in.
	No. 2	540 ft.	30 ft. 6 in.
	No. 3	680 ft.	28 ft.
	No. 4	450 ft.	30 ft.
Mercantile Wharf	*a.*	535 ft.	30 ft.
	b.	535 ft.	30 ft.
Newstead Wharf	No. 1	470 ft.	30 ft.
	No. 2	620 ft.	30 ft.
	No. 3	360 ft.	28 ft.
Hamilton Reach			
Brett's Wharf (3 berths)		1,415 ft.	30 ft.
Cold Stores Wharf		781 ft.	30 ft.
Hamilton Wharves	No. 1	450 ft.	30 ft.
	No. 2	800 ft.	34 ft.
	No, 3	550 ft.	31 ft.
	No. 4	700 ft.	31 ft.
Cairncross Dock		1,300 ft.	30 ft.
Broken Hill Wharves	No. 1	550 ft.	30 ft.
	No. 2 & 3	825 ft.	30 ft.
Messageries Wharf		900 ft.	32 ft.
Quarries Reach			
Abattoir Wharf		460 ft.	28 ft.
Borthwick's Wharf		412 ft.	28 ft.
Pinkenba Wheat Wharf	No. 1	700 ft.	31 ft.
	No. 2	550 ft.	32 ft.
Shirley's Wharf		402 ft.	32 ft.
Consolidated Fertilisers Wharf		500 ft.	34 ft.

BULK LOADING FACILITIES: Hamilton Wharf Berth No. 4; gross handling rate for loader is 700 t.p.h. Moveable conveyor system services 360 ft. of wharf.

Pinkenba Wheat Wharf: two belt conveyors serving seven loading spouts of which four can be used simultaneously. Nominal handling rate is 1,600 t.p.h

Rutile Sand: Stowage factor 18–20. Loading rate 7,000–9,000 tons per day.

Shipmaster's Report: New bulk handling installation at Pinkenba, Brisbane.

This is a new plant on the old No. 2 wharf officially opened 17th Feb. 1973. A privately owned single traversing conveyor system with one loading head supplied from eight storage tanks each of approx. 2,500 tons capacity, together with additional supply from road transport as required to augment the tanks. A further storage is still to be built.

The "Shiploader" traverses 370 ft. along the wharf. The loading head has an endless belt type trimmer and telescopic chute for lowering into the hatch of the vessel being loaded and the trimmer has a throw of 30–50 ft.

In the stowed position the bottom of the trimmer is 28 ft. above the existing wharf level and has an extension of 54 ft. – this is 40 ft. beyond the edge of the wharf but does not take into account the vertical pile fendering which is approx. 1 ft. diameter logs, therefore outreach would be approx. 39 ft. When in the extended position the telescopic chute and trimming head can be lowered 45 ft. into the hatch – or 17 ft. below existing wharf level.

The trimming machine on the end of the telescopic chute is approx. 4 ft. square, and therefore cannot be used to load into underdeck grain spaces with the normal small "manhole" type loading holes.

Control is effected from a cab 52 ft. above the wharf level.

There is nobody from the installation on board the ship. Communication is by a telephone situated on one of the bogies at the foot of the travelling conveyor. Local union/labour troubles will not permit a telephone to be placed on the ship or even the use of "walkie-talkie's" as supplied to most ships. If a telephone or "walkie-talkie" is used the local unions demand stevedore labour be used.

Loading rate is expected to be approx. 1,500 t.p.h. when the plant is fully run in, at present about 650–750 t.p.h. is being realised.

So far only sorghums have been handled, but the next cargo is expected to be woodchip, and mineral cargo as well as grain is expected to be handled in the future.

There is 32 ft. of water at LWOST alongside.

TANKERS: Two refineries at mouth of Brisbane River. Gas-freeing facilities not available, but chemist available to issue Gas-free Certificate. There are slop discharge facilities at both refineries.

Amoco Bulwer Island Refinery: on North bank, oil bunkering and export berth, 800 ft. length, 32 ft. depth LWOST.

Amoco Luggage Point Wharf: on North bank, crude import berth can accommodate vessels up to 900 ft. length. Berth length 900 ft. depth 40 ft. LWOST.

Ampol Refinery Wharf: on South bank, berth length 550 ft., depth 32 ft. LWOST. At Fisherman's Island, up to 40 ft. draft and berth length 1,082 ft.

Philips Refinery Wharf: can accommodate tankers up to 550 ft. length, depth alongside 30 ft. LWOST.

Shell Wharf: on North bank. Berth length 650 ft., depth 32 ft. LWOST.

Mobil Wharf Colmslie: on South bank, berth length 800 ft., depth 24 ft. LWOST.

BRIDGES: None at present, but one being considered lower reaches of river restricting height to 151 ft.

STEVEDORES: Ample labour available for all cargo working except rush periods.

Normal capacity per gang per shift: 60 tons break bulk; 75 tons palletised cargo. A 45 ton (45.72 tonnes) portainer crane is situated at the Hamilton Wharves. Other cranes from 4 tons (4.06 tonnes) to 30 tons (30.5 tonnes) are available at various wharves.

DENSITY: 63.6 lb. per cu. ft.

FRESH WATER: From mains 90 psi. 180 t.p.h. at all berths.

FUEL: Oil bunkering available at all oil wharves. Also by road tanker at cargo berths. Distillate, diesel fuel or fuel oil. Largest bunkering barge is 1,400 tons for fuel oil.

DEVELOPMENTS: The Port of Brisbane Authority is well advanced on plans to provide new container and Ro/Ro facilities, wharves and terminal at Fisherman Islands, at the mouth of Brisbane River, and capable of handling ships up to 60,000 d.w.t. Due to be operational July, 1979.

GANGWAY/DECK WATCHMEN: Normally by crew, but can be hired.

OPENING/CLOSING HATCHES: Performed by stevedores/crew.

CUSTOMS ALLOWANCES: see "Melbourne".

CARGO GEAR: Heavy lift facilities up to 45 tons available certain wharves. Also see "Melbourne".

IDENTIFICATION CARDS: See "Melbourne".

CONSULS:

American Consulate	T & G Building Queen	229–4677
Austrian Consulate	293 Queen	229–3222
Belgian Consul	380 Queen	221–3116
Bolivian Consulate-General	210 Queen	221–1606
British Consulate-General	193 NQy	221–4933
Chilean Consul	153 Wickham, Fort Vy	52–2264
Danish Consulate	9 Rossiter Pde, Ham	268–2630
Federal Republic of Germany	289 Queen	221–7819
Finnish Consulate	141 Queen St.	221–9111
French Consular Agent	380 Queen	229–2361
Greek Consulate	293 Queen	229–3222

Italian Consulate	158 Moray NF	358–4344
Japanese Consulate	68 Queen	31–1438
Mexican Consulate	137 Gympie Rd.	263–5577
Netherlands Consulate	150 Edward	31–1779
New Zealand Consulate	288 Edward	221–0005
Norwegian Consulate	344 Queen	221–3316
Panamanian Consulate	Hyde Rd, Yer	48–7755
Peruvian Consulate	35 Hepworth St., Chapel Hill	378–7328
Philippine Consulate	Logan Rd, Stones Cnr.	397–8407
Portuguese Consulate	379 Queen	221–4833
Swedish Consulate	30 Herschel	221–9977
Swiss Consular Agency	15 Corowa, Wavell Hts	266–9782
Uruguayan Consul	193 Mary	31–0221

REPAIRS: All major repairs undertaken, including main propulsion diesel engines, steam turbines, boilers, reduction gearing servicing, propellers, tailshafts, stern bearings, all engine-room repairs, deck gear, radar, radio and sonar equipment, fitting-out berths.
DRY DOCKS: Largest vessel handled, m/v *Clutha Capricorn*, 83,500 d.w.t. All major facilities available.

The Dock has a bottom width of 110 ft. (33.5 m.), a total depth of 51 ft. (15.5 m.), and a length of 880 ft.(268 m.). The Dock is fully equipped for repair services, including facilities for water blasting, sand blasting, compressed air, Radiographic (X-Ray) facilities, hull cleaning and painting, mechanical and structural repairs, etc.
TIME: GMT plus 10 hours.
HOLIDAYS: New Year's Day; W.W.F. Picnic Day; 31st January – Australia Day; 13th March – Labour Day; Good Friday; Easter Monday; 25th April – Anzac Day; 12th June – Queen's Birthday; Christmas Day; Boxing Day.

Close Holidays – Christmas Day, Good Friday, Anzac Day, Labour Day, W.W.F. Picnic Day (No labour available these days).
POLICE/AMBULANCE/FIRE: Tel.: 000 and ask for service required.
TELEPHONES: At most wharves. Can be connected on board.
AUTHORITY: Port of Brisbane Authority.

AGENT: Patrick Agencies, 443, Queen Street, Box 1460, G.P.O., Brisbane, Queensland 4001. Cables "Rikpat". Tel: 31–1871. Telex AA40260. After hours tel.: 379–3665.

BROOME, W.A.: 17.59 S. 122.14 E. (See Plan Book)

PORT LIMITS: All water enclosed in an East and West line drawn through Station Hill; a North and South line drawn through Fall Point; and an East and West line drawn 3 miles to South of Entrance Point, a North-South line drawn 3 miles West of Entrance Point and including the whole extent of Dampier Creek.
CERTIFICATES/DOCUMENTS/HEALTH: See "Melbourne".
PILOTAGE: No resident Pilot. Inform Harbour & Light Dept. Fremantle ETA 2 weeks in advance. Pilot boards approximately 292° (T) distant 4.5 miles from Gantheaume Point.
RESTRICTIONS: Channel between Channel Rock and Middle Bank dredged to 17 ft. LWOST. Vessels of more than 15 ft. draft restricted to height of tide for arrival/departure. HWOST 27.5 ft. HWONT 17.2 ft.
MAX. SIZE: Draft 30 ft.
VHF: Limited facilities channels 6 and 16.
BERTHING: 2 berths. Outer berth max. length 612 ft., 32 ft. LWOST. Inner berth length 479 ft., depth 28 ft. LWOST.
STEVEDORES: 3 gangs working 0800 hrs. – 2000 hrs.
CARGO GEAR: See "Melbourne".
TUGS: None.
FRESH WATER: Up to 100 tons available. Rate up to 20 t.p.h. at 50 cents per 1,000 litres.
FUEL: Both diesel and furnace oil available, provide prior notice given to BP Agents. Diesel only Inner berth, diesel and furnace oil Outer Berth.
REPAIRS: Not available.
TIME: GMT plus 8 hours.
GENERAL: Tides: Both ebb and flood in direction of line of jetty. Tide has apparent ebb period of 8 hours, flood 4 hours. Slack water 2.5 hours prior HW and LW. "State of Tide" signals ebb, flood, or slack, at masthead. At night red, green or white light – by day black ball, cone, or square. Signals indicate tide at jetty not in channel.
AUTHORITY: Harbour & Light Dept.

AGENT: Sub-agent of Patrick Agencies, Fremantle.

BUNBURY, W.A.: 33.19 S. 115.38 E. (See Plan Book)

DOCUMENTS:

- Number of Crew Lists, 2 official (Forms M & S 11 and 2 flimsy copies).
- Passenger Lists, 5.
- Customs Documents:
  - Last Port Clearance.
  - Form 42A Ship's Stores consumed in Australia.
  - Form 5 Manifest of Crew's Possessions.
  - Loading Ports List.
  - Ship's Master's Bond.
  - Approved Identification Documents of all crew.
  - Commonwealth Light Dues Receipt.
  - State Tonnage Dues Receipt.
- Health Documents, Smallpox Certificates and other forms handed to Master by Quarantine Doctor.
- Manifests, 3.
- Bills of Lading, 2.

PILOTAGE: Radio Harbour Master, Bunbury 24 hours and 4 hours notice. VHF Channel 16 – pilot boat and tug. Base set not manned continuously but pilot boat may be contacted 1 hour before arrival. Pilot boat painted white with black rubbing strip, black gunwhale, centre house with orange top. Word "Pilot" painted on sides. Pilot boards 1.5–2 miles from breakwater. Boarding area is with North Shore leads in line bearing 157°–337° and 1 mile from Breakwater Light seawards – no alternative area. Anchorage – main lighthouse bearing 195° distance 1.5–2 miles.
ANCHORAGE: Depth 7 to 9 fathoms. Anchoring not advised in stormy weather; safer to steam offshore.
RESTRICTIONS: 24 hour port but entry not generally carried out at night.
MAX. SIZE: *Outer Harbour:* Maximum length 585 ft., maximum draft 28 ft. 6 in. Also see "Bulk Cargo Facilities".
HEALTH: Quarantine inspection required if Bunbury is first Australian port. Quarantine inspection for Health Clearance – hours of inspection 0600–2200 hrs. Also see "Melbourne".
RADIO: Perth Radio.
TUGS: Two tugs available. Join vessel off berth. Ship's lines used if necessary. The tugs are normally manned from 0700 to 1600 hrs. weekdays. At other times overtime is charged.
BERTHING: Heavy shore mooring springs used.
BULK CARGO FACILITIES: One ore-loading berth 604 ft. in length. Conveyor system loading at 850 t.p.h.

One grain-loading berth 600 ft. in length. Conveyor system loading at 300 t.p.h.

New Inner Harbour: No. 1 Woodchip berth consists of 6 breasting dolphins fitted with flexible fender units, 2 mooring dolphins and a central shiploader platform and access jetty. The dolphins and platform are connected by steel walkways. Length of berth 381 m. Depth 12.2 m. Wood Chip bulk loader rated at 1,000 t.p.h. The facilities can accommodate vessels up to 44,800 tonnes and 11m. draft. During loading the vessel is warped back and forth alongside the shiploader.

Alcoa's Alumina Berth. Bulk loader rated at 2,000 t.p.h.

The approach channel depth to both berths is 12.20 m.
STEVEDORES: Week-days – ETA to be advised by 0600 hrs. for labour requirements on that day. Week-ends – ETA required by 0600 hrs. Friday.
MEDICAL: Medical attention available. Hospital facilities available. Smallpox vaccinations and valid certificates required.
TANKERS: One tanker discharge berth – draft 28 ft. 6 in.
DENSITY: 1023 to 1027 – no relation to tide.
FRESH WATER: Readily available – 25 cents per ton.
FUEL: Furnace oil, marine and light diesel by road delivery.
DEVELOPMENTS: The No. 2 General Purpose Berth is under construction and should be completed by the end of 1979. It will be suitable for ro-ro quarter ramp type vessels.
GANGWAY/DECK WATCHMEN: Not required.
OPENING/CLOSING HATCHES: Preferably by crew.
CUSTOMS ALLOWANCES: Each crew member 200 cigarettes initially and thereafter as required in reasonable quantities. Wine and/or Spirits, open bottles of spirit on arrival not to exceed 1 quart and thereafter as required in reasonable quantities.
CARGO GEAR: Must comply with Australian Loading and Unloading Safety Regulations. See "Melbourne".
IDENTIFICATION CARDS: See "Melbourne".
CONSULS: Vice-Consul for Norway.
REPAIRS: Facilities available.
DRY DOCKS: Nil.
REPATRIATION: Facilities available.
AIRPORT: Light aircraft landing strip only.
TIME: GMT plus 8 hours.
HOLIDAYS: Days on which work cannot be performed: Good Friday, Christmas Day, Labour Day, Waterside Workers' Picnic Day, Anzac Day.
POLICE/AMBULANCE/FIRE: Emergency Number Bunbury 000.
TELEPHONES: Telephones placed on board free of charge: Rental $1.50 per week plus calls at cost.
DELAYS: Generally no delays.
AUTHORITY: Bunbury Port Authority.
AGENT: Sub-agent of Patrick Agencies, Fremantle.

BUNDABERG, Queensland: 24.45 S. 152.24 E. (See Plan Book)

CERTIFICATES/DOCUMENTS/HEALTH: See "Melbourne".
PILOTAGE: Compulsory. Radio not less than 24 hours ETA; VHF Channel 16.

Pilot boards 1 mile outside Fairway Beacon.
PORT LIMITS: The port limits are defined as the waters contained within a radius of 3 miles of South Head (Burnett Heads) Lighthouse, together with all navigable rivers communicating therewith, and the banks and the foreshores thereof.
DEPTHS: (LWOST) Channel 7.6 m.; Swinging Basin 7.6 m., Sugar Berth 10.40 m.; Oil Berth 8.60 m.. Keel clearance normally 0.9 m.
RESTRICTIONS: Length 182.87 m. maximum. Vessels not to pass out through sea reach on ebb. Channel width 76 m.
RADAR/VHF: No radar service. Bundaberg Harbour Board office, craft, tug and pilot launch can be contacted on VHF Channel 16.
TUGS: One tug, 22 tonnes bollard pull, owned by Howard Smith Industries, and one work boat of 4 tons bollard pull, owned by the Harbour Board, which is also used for pushing, are available, both fitted with VHF. Ship's lines or tug's lines are used, and no charge for tug's lines.

BERTHING: No. 1 Bulk Sugar Berth 190 m. long. No. 2 Oil, Molasses, Aqua Ammonia, 80 m. long.

SPECIALISED CARGO HANDLING FACILITIES: *Bulk Sugar Berth:* Loading by moveable gantry at 1,400 t.p.h.

Bulk Molasses: Loading rate 240 t.p.h. No facilities for containers or roll-on/roll-off traffic.

Oil Berth: Facilities for discharge all petroleum products and aqua ammonia and loading molasses.

MEDICAL: Hospital facilities available.

TANKERS: 10-inch lines. No slop discharge facilities. Oil tankers, discharge only. Molasses tankers, load only. Depth alongside tanker berth 8.6 m. LWOST.

DENSITY: Average density about 1020.

FRESH WATER: Unlimited supplies available, delivered by hose 30 t.p.h. Cost 11 cents per ton.

FUEL: All grades available, 24 hours notice required.

GANGWAY/DECK WATCHMEN: Not necessary, but available.

OPENING/CLOSING HATCHES: By crew.

CARGO GEAR: No additional local regulations. See "Melbourne".

IDENTIFICATION CARDS: See "Melbourne".

CONSULS: None.

REPAIRS: Almost all types of deck and engine repairs possible.

REPATRIATION: Facilities exist.

AIRPORT: Airport 2 miles from city serviced by regular internal airlines.

TIME: GMT plus 10 hours.

HOLIDAYS: Normal Queensland holidays observed but cargo worked regardless of holidays.

POLICE/AMBULANCE/FIRE: Dial 0–000 from the port.

TELEPHONES: Telephone connection placed at tanker berth and sugar berths.

DELAYS: Vessels of less than 160 m. LOA can berth at any state of the tide provided there is 0.9 m. under keel clearance. Vessels whose LOA is between 160 and 182.87 m. berth with the flood tide only. Vessels sail on flood tide only. With vessels loaded to tide prediction sailing 1 hour before high water.

AUTHORITY: Bundaberg Harbour Board.

AGENT: Sub-agent of Patrick Agencies, Brisbane.

BURNIE, Tasmania: 41.03 S. 145.55 E.

(See Plan Book)

PORT LIMITS: Southward of a line drawn from the Eastern Island Breakwater Light to the Round Hill Lighthouse on the Eastern side of Emu Bay.

APPROACHES: Port situated on Western shore of Emu Bay and easy of access. Bay is two miles wide and one mile deep facing in a Northerly direction. The bottom is sand and clay interspersed with patches of reef and rock, particularly in the Southeastern sector of Bay. Vessels may anchor on main leads in vicinity of Pilot boarding ground, but it is not advisable remain at anchor during strong onshore winds. Port protected by two breakwaters: the inner, founded at inner end of Blackmans Reef, lies in a 110° direction and is 380 m. long. The other, an island structure 488 m. long and protecting the port from Easterly weather, lies in a 130°/310° direction, with its N.W. end bearing 045°, 700 ft. from the S.E. end of the inner breakwater.

DOCUMENTS: also see "Melbourne". (Marine Board only): Inward Manifests to be lodged on arrival. Agents supply Manifests and non-negotiable copy Bills of Lading to Customs for checking prior to vessels arrival.

PILOTAGE: Prior advice through local Agents, ETA by radio telegraphy through Melbourne Radio (VIM) or Hobart Radio (VIH) to Marine Board Burnie. Immediate advice VHF Channels 16 and 12.

Pilot launch – 14 m. white launch with buff cabin, name "Miowera". International signals apply. Boarding area on main harbour leads 210° (T) with Round Hill Pt. Lighthouse bearing 155° (T). Ladder 1.5 m. from water, man ropes, no boat rope.

ANCHORAGES: See "Approaches".

RESTRICTIONS: Vessels up to 9.4 m. draft, no restriction. Maximum length 250 m. 24-hour service, weather permitting.

MAX. SIZE: (See "Restrictions"). Tankers at Island Breakwater to 10.9 m. draft at all states of tide.

HEALTH: Pratique automatic when from other Australian ports. Otherwise notify local Agent.

RADIO: Melbourne Radio (VIM).

TUGS: Tug(s) join East of Island breakwater. Usually lashed alongside with tug's lines (no extra charge). When on towing duty, usually ship's line.

BERTHING: Vessels equipped with vegetable fibre ropes or bare spring wires required to use shore springs.

Quayage, Sheds and Depths.

Ocean Wharf. On South side of inner breakwater. 305 m. long, 28 m. wide. Dredged depth 10 m. for 180 m. length, shoaling to 7.6 m. at inshore end. Stern loading facilities at inshore end.

McGraw Pier, 240 m. long and 44 m. wide (added to Emu Pier, the original concrete breakwater). On North side is 213 m. of effective berthage with dredged depths ranging from 9.1 m. for 150 m. length, shoaling to 6.4 m. at inshore end. A new stern loading ramp now operating at inshore North McGraw. Apron width is 7.6 m. On South side 183 m. of effective berthage with dredged depths of 9 m. to 190 m. from end. One crane of 25 tonne capacity, with outreach of 20 m.

Jones Pier, 46 m. South of McGraw Pier, is a wooden pile structure 213 m. long and 30 m. wide. On North side 152 m. of effective berthage with dredged depths from 8 m. to 5.5 m. inshore.

Bulk Berth. 275 m. long with 215 m. of effective berthage. This berth incorporates a bulk loader with a capacity of up to 1,270 t.p.h. The berth is also suitable for general cargo operations.

Ferry Terminal. Is 83 m.. long and 35 m. wide. Vessels of up to 200 m. may berth. The wharf is traversed by a 40-ton portal crane with a 25-ton auxiliary hoist. The crane may be hired when not required for terminal operations. Arrangements for this to be made with the Harbour Master. The stern loading ramp has a width of 8.5 m. permitting two lines of traffic. The axle loading of the wharf is 50 tons. The berth is dredged to 9 m.

New Jones Pier South – berth is 170 m. long, effective length 260 m. Apron width to shed 30 m. Dredged to 9.4 m. overall.

BULK CARGO FACILITIES:

Roll-on/Roll-off facility at Southern Ferry terminal, and at West end of Ocean Wharf.

Lift-on/Lift-off facility of 40 tons at Ferry Terminal as above.

Conveyor Loader at bulk berth for export of zinc, lead and copper concentrates to 1,270 t.p.h.

Inward bulk berth and crane at South McGraw Pier.

Sulphuric Acid loading facility at Island Tanker Berth, with rate of 1,000 t.p.h.

STEVEDORES: Labour to be ordered (1) by 1500 hrs. for following day (weekdays), (2) by 1300 hrs. Friday for Saturday and Sunday, (3) by 1900 hrs. Sunday for Monday.

RADAR/VHF: No radar service. Port equipped with VHF, R/T operating International Maritime Bands. Pilot vessel, tug, and other floating plant similarly equipped.

MEDICAL: Notify Agent prior arrival of extra requirements other than pratique. General Hospital 1 Km. from port. Current smallpox and cholera revaccinations arranged by prior notice.

TANKERS: Tanker Berth is 85 m. long and 30 m. wide, sited on South side of Island Breakwater. 11.3 m. of water in this berth, which will accommodate vessels of up to 200 m. in length. Diameter of lines are 250 mm. No residue discharge facilities. 1 berth, maximum draft 10.9 m.

DENSITY: 1,025 to 1,028.

FRESH WATER: All wharves – hose from wharf hydrants. Rate adequate – cost 12c per ton.

FUEL: Diesel and Heavy fuel available from road tankers.

FIRE PRECAUTIONS: Normal. Twenty-four hour ferry service to be maintained to tanker berth.

GANGWAY/DECK WATCHMEN: Watchmen commonly used. Penalty rates apply on weekends and holidays.

OPENING/CLOSING HATCHES: Stevedores will close hatches.

SHIP CERTIFICATES:

Safety Construction.
Safety Equipment.
Safety Radio Telegraphy.
Load Line.

CUSTOMS ALLOWANCE: 200 cigs. or 500 grams tobacco. Beer is carried outside the bond. One bottle spirits per man every ten days.

CARGO GEAR: Australian Navigation (Loading & Unloading) Regulations apply.

CONSULS: Nil.

REPAIRS: Limited repairs carried out. The Emu Bay Railway Company have a foundry and machine shop.

REPATRIATION: On crew member signing off Agent requires passport or identification card. Agent handles repatriation details and notifies Immigration Department, Hobart, re movements of crew member.

AIRPORT: Daily services: 17 Km. distant.

TIME: Local time is Australian Eastern Standard time, i.e. GMT plus 10 hours. Tasmanian Summer Time applies. Dates of operation published in Australian Notices to Mariners.

HOLIDAYS: Cargo work performed on all holidays except Christmas Day, Good Friday, WWF Picnic, Anzac Day, Labour Day.

POLICE/AMBULANCE/FIRE: Police: 30-1201; Ambulance, 31-2111; Fire 31-1155.

TELEPHONES: Telephones are available at all wharves, through Marine Board.

AUTHORITY: The Marine Board of Burnie.

AGENT: Sub-agent of Patrick Agencies, Melbourne.

BUSSELTON, W.A.: 33.38 S. 115.20 E. (PORT CLOSED)

This port is closed to commercial shipping and it is unlikely that the jetty will be re-opened.

Jetty partly demolished by cyclone in April, 1978.

CAIRNS, Queensland: 16.55 S. 145.47 E.

(See Plan Book)

CERTIFICATES/DOCUMENTS/HEALTH/CARGO GEAR: See "Melbourne".

PORT LIMITS: Commencing at Cape Grafton, thence by a line bearing North (magnetic) 3.2 km., thence by a line bearing North 82° West (magnetic) to Taylor Point, thence by the HW line on the mainland to the point of commencement, including all rivers, creeks and navigable waters within the above limits.

PILOTAGE: Arrangements are made by ship's Agent with the

Harbour Master. Location of boarding is outside the Fairway Beacon, 10 km. from port.

APPROACHES: Through Grafton Passage, which is 34 km. long and 8 km. wide, and free of any encumbrances, and is lighted by a group flashing light on Fitzroy Island which is visible in clear weather for a range of 47 km.

Channel: 10 km. long, 76.2 m. wide, 8.2 m. LWOST – defined by beacons 183 m. apart spaced at intervals of approximately 915 m. and 1220 m.

After passing through the channel, the inlet widens to 458 m. opposite the main wharves. The inlet runs for 8 km. with various depths.

MAX. SIZE: *Largest Vessel:* "P. J. Adams" – gross tonnage 22,692 and nett tonnage of 14,083, dead-weight capacity 33,682. Overall length 203 m.

Largest Cargoes: Raw Sugar: "Eiru Maru" 30,961.5 tonnes, 9.3 m. draft.

Bulk Molasses: "Team Augini" 18,793.5 tonnes, 7.925 m. draft.

Petroleum Products: "W. M. Leonard" 25,533 tonnes, 8.687 m. draft.

PRATIQUE: Available 24 hours per day, 7 days a week.

VHF: VHF radio-telephone service is situated at the Piermasters Office, No. 2 Wharf, and operates a service from 0800 hrs. to 1700 hrs. with "out of hours" transmission being every hour, on the hour.

The Launch "Floreat" has HF and VHF.

TUGS: 1 tug is based in the port and is operated by Moreton Tug and Lighter Company. The tug "Daly" has a bollard pull of 9 tons. Another tug "Mossman" is available from Mourilyan Harbour upon request. It has a bollard pull of 7.6 tons.

Launches for running lines etc. are also available, together with punts and catamarans. The launch "Floreat" is used for channel soundings and is also available for other purposes.

BERTHING:

	Depth alongside:
Nos. 1 to 5	8.6 m. LWOST – 3.048 m. from wharf face
No. 6	8.8 m. LWOST – 3.048 m. from wharf face
No. 8	9.1 m. LWOST – 3.048 m. from wharf face
No. 10	9.5 m. LWOST – 3.048 m. from wharf face
No. 12	10.7 m. LWOST – 3.048 m. from wharf face

BULK HANDLING FACILITIES:

Bulk Sugar Terminal Loading: No. 12 Wharf.

(a) 1 travelling gantry loader, consisting of a luffing boom supported from a shore based structure (mobile).

(b) Maximum distance from wharf edge to loading unit 14.2 m.

(c) Maximum length of traverse of loading unit 143.2 m.

(d) Maximum length permissible for ship using bulk berth – wharf length 183 m. plus dolphin in line with wharf and 39.6 m. distant each end. No limit anticipated.

(e) Maximum beam permissible for ship using bulk berth 24.4 m.

(f) Maximum clearance of loading unit at highest high water (for non retracting loader), not applicable, boom of loader at horizontal working position 13.5 m. above high water level but boom is capable of being lifted to a vertical position.

(g) Gross handling rate for loader – 864 t.p.h.

Bulk Molasses Terminal:

Total capacity of 19,000 tons with pipe-line connection to wharf. Loading rate 305 t.p.h.

Bulk Tallow Tanks:

Rear of No. 6 Wharf. 2 tanks; one with a capacity of 304.8 tons and one with a capacity of 813 tons. Loading rate of 56 to 61 t.p.h.

Grain Handling Facilities:

No. 3 Wharf shed with a loading capacity of up to 152 tonnes per hour with a rail to shed transfer system.

Container Handling Facilities:

There are facilities at No. 6 Wharf for handling containerised and unitised cargoes, including a 25-ton stiff-legged derrick crane and an adequate assembly area adjacent to the wharf.

STEVEDORES: Port quota 80 men.

TANKERS: Tankers berth at Berth No. 8 or 10. Max. LOA 183 m. Berth No. 10 is served by various oil pipe-lines and L.P. gas pipe-lines to company depots. No. 8 Berth is the alternative oil berth.

FRESH WATER: Fresh water is available on all wharves. Rate of supply is 70 t.p.h.

FUEL: Oil bunkering facilities are available at No. 10 Wharf. No. 8 Wharf is an alternative oil berth. Nos. 8 and 10 Wharves are connected by pipe-line to adjacent oil tank farm installations.

DRY DOCK: A dry dock, 61 m. long and 12.2 m. wide accommodates vessels up to 58 m. in length. De-watering rate is 303–379 litres per minute. Draft of vessels which can be accommodated is equivalent to the height of tide at the particular time.

Slipways: The Harbour Board owns a Slipway in Trinity Inlet, between Hayles Terminal and No. 1 wharf which is leased to North Queensland Engineers and Agents. It is available for small craft up to 51 tons and 18.3 m. in length. North Queensland Engineers and Agents Pty. Ltd. slipway in Smith Creek is able to handle vessels to 61 m. in length.

TELEPHONES: There are plug-in points available to shipping from Nos. 1 to 6 Wharves, and No. 8 Wharf.

DEVELOPMENTS: A site for a future deep water port, with a minimum depth of 32.8 m. of water, in the area adjacent to King's Point and Little Turtle Bay on the mainland opposite Fitzroy Island is under investigation. The port limits are to be extended to include this area.

AUTHORITY: The Cairns Harbour Board.

AGENT: Sub-agent of Patrick Agencies, Brisbane.

CARNARVON (Including Useless Loop & Cape Cuvier):

(A) CARNARVON: 24.53 S. 113.40 E.

BERTHING: One jetty for the import of petroleum products. Length of berth face 97.5 m. Depth 5.0 m. Max. tidal range 1.5 m. Coir springs provided as there is swell movement.

(B) CAPE CUVIER, W.A.: 24.13 S. 113.20 E. (See Plan Book)

This port is now incorporated in the Port of Carnarvon the limits of which have been extended as follows:—

"A line due West for 4 nautical miles from a point on the mainland in Lat. 24° 10′ S. and Long. 113° 26′ 4.5″ E., and thence in a S.S.W. direction to Cape Ronsard at the North End of Bernier Island" and then as for Carnarvon to the starting point.

OPERATORS: Texada Mines.

DOCUMENTS:

1 Form 5 Personal Property Declaration.
1 Form 42A Stores List.
1 Form AQ 360 Health Form.
2 Forms (M & S11) Crew Lists (prescribed form).
1 Form C & E 886 Previous Ports of Call.

APPROACHES: Red Bluff about 12 miles North of Cape Cuvier can be picked up by radar at a distance of about 20 miles. Cape Cuvier is easily identified by large white salt hill.

PILOTAGE: Pilots will board approximately 200° 1.5 miles from jetty.

Pilot will remain on board after mooring and until vessel is loaded or should weather deteriorate until vessel anchored.

Notice for Pilots is by 'Shipserv' message to Harbour Master, Carnarvon 48 and 24 hours prior to arrival.

Pilots board by tug or workboat.

ANCHORAGE: Recommended anchorage is in position with the jetty bearing approximately 200° (T) at a distance of 1.5 miles. Depth at anchorage is about 15 fathoms. 3 cables off the shore, the depth is about 9 fathoms. Holding ground is good.

RESTRICTIONS: No berthing at night.

MAX. SIZE: Vessels of 65,000 d.w.t. call on a regular basis. Depth alongside is 52 ft. (15.85 m.).

RADIO: Carnarvon Radio. Also on VHF.

PRATIQUE: Radio pratique is not available.

TUGS: One large and one small tug available.

BERTHING: Vessel is moored to four buoys for'd and four buoys aft, and mooring is attended by mooring crew. Vessel is required to have available five nylon ropes for'd and five aft, in each case three of the ropes should be 300 m. in length and the remaining two ropes should be 200 m. in length.

Berthing is not carried out in adverse weather causing a swell of over 5 ft. in height, nor if wind is from either a North or South direction.

Due to adverse weather vessels may have to wait as much as 24 days to complete loading.

STEVEDORES: Texada Mines.

DENSITY: 1025.

FRESH WATER: Not available. Due to possible loading delays caused by adverse weather it is recommended that vessels arrive with all fresh-water tanks full.

FUEL: Not available.

DEVELOPMENTS: A new warehouse under construction for storage of potash. New conveyor belt for loading potash operational.

WATCHMEN: No shore watchmen available.

HATCHES: To be opened/closed by ship's crew.

CUSTOMS ALLOWANCES: 200 cigarettes in opened carton, or 0.25 lb. cigars, or 0.5 lb. tobacco, and one opened bottle spirits per crew member.

CARGO GEAR: Not required. Salt loading is by conveyor belt.

REPAIRS: Not available.

DRY DOCK: None.

REPATRIATION: Road connection to Carnarvon, which is 65 miles distance from Cape Cuvier, thence air connection with Perth where international flights available.

AIRPORT: Private airfield only, about 10 miles from port of Cape Cuvier.

TIME: GMT plus 8 hours.

TELEPHONE: Available in Harbour Master's office.

SHORE LEAVE: Allowed. A bus connection is available, leaving Cape Cuvier at 0730 hrs. for Carnarvon, and returning with departure from Carnarvon at 1530 hrs.

GENERAL: Port is gazetted under Western Australian legislation and controlled under Ports and Harbours Regulations. Mooring and loading facilities operated by Texada Mines.

Loading is carried out by Texada Mines Personnel.

AUTHORITY: Harbour & Lights Department, Fremantle.

AGENT: See "Fremantle".

(C) USELESS LOOP (Shark Bay), W.A.: 26.05 S. 113.24 E.

DOCUMENTS: See "Melbourne".

PILOTAGE: Compulsory: Notice for Pilots is by 'Shipserv' message to Harbour Master, Carnarvon, 7 days, 48 hours and 24 hours prior to arrival.

Pilot boarding ground is 5 nautical miles 270° from Babbage Island Light Tower, Carnarvon.

Pilots remain on board during transit to Useless Loop, when berthed alongside jetty and until disembarkation in above position.

RESTRICTIONS: Continuous strong "Southerlies" may result in abnormal tides which could result in large vessels having to leave berth prior to completion of loading on rare occasions.

TUGS: None.

BERTHING: One berth. Owned and operated by Shark Bay Salt Pty Ltd. Conveyor belt system from Salt Stock Pile to ship gross rate 700 t.p.h. for salt, 400 t.p.h. for gypsum. Dolphin type jetty length 620 ft. runs approximately North and South directions and 2.1.cables from Topper Island. Min. depth at berth 33 ft. LWOST. Rise of tide approximately 3 ft. Winds predominantly S.E./S.W.

FUEL: Not available.

FRESH WATER: None available.

REPAIRS: Not available.

AUTHORITY: Harbour & Light Department, Fremantle.

AGENT: See "Fremantle".

DAMPIER: W.A.: 20.38 S. 116.45 E. (See Plan Book)

PORT LIMITS: A vessel is considered to be an arrived vessel from the time of crossing the quarantine line, which runs due East from Courtenay Head Lighthouse.

ARRIVAL INFORMATION: *Iron Ore:* Every vessel intending to load a cargo of iron ore at Dampier shall on departure from the last port of call cable the following information, addressing the message **Shipserv Hamiron Dampier.**

(a) ETA, quantity of cargo required, deepest departure draft, and distance between keel and hatch coaming.

Example: Name of ship, ETA pm20/4, 108000lt, 54.0 ft., 79.2ft.

(b) 7 days before intended arrival at the Port confirmation or any variation to the above and indicate loading order by hatches of the product to be lifted.

Example: Name of ship, ETA 1000/4, 108000lt, 54.0ft., 79.2ft., 1/10000 Fines, 7/10000 Fines, 9/10000 Fines, 2/10000 Lump, 4/10000 Lump, 6/10000 Lump, 3/8000 Fines, 5/10000 Fines, 2/8000 Lump, 6/6000 Lump, 7/5000 Fines, 3/8000 Fines, Trim 3000 Fines. Total 108000lt.

Vessels arriving to discharge general cargo: *(a)* Owners are required prior to accepting cargo for Dampier, to submit a copy of the vessel's General Arrangement Plan for the purposes of ascertaining the vessel's acceptability in sufficient time to permit recommendations to be made on the positioning and stowage of the cargo.

(b) Prior to departure from the loading port, Masters shall forward by first class air mail a copy of the vessel's cargo plan showing the nature, description and weight of the cargo to be discharged at Dampier.

The documents referred to in (a) and (b) above shall be forwarded to Hamersley Iron Pty. Limited, P.O. Box 21, Dampier marked "Urgent ships papers".

Arrival Advices: Every vessel intending to discharge cargo at Dampier shall on departure from the loading port or 7 days before arrival, whichever occurs first, and cable the following information addressing the message "Shipserv Hamiron Dampier".

ETA, quantity and nature of cargo to be discharged, stowage and the deepest arrival draft.

Example: Name of ship, ETA am/4, 4700lt. General 1/1200 2/2000, 3/1500, 22 ft.

ARRIVAL ADVICE: Dampier is a first port of entry and all ships bound for this port are to radio through the normal recognised coast stations, addressing their messages "Pilharb Perth" and prefixing the message "Shipserv".

(a) In the case of vessels arriving from overseas.
  (i) 10 days before intended arrival at the port ETA and whether the port is the first port of call in Australia.
  (ii) 7 days before intended arrival at the Port, confirmation of any variation of the advice given pursuant to paragraph (i) above including in the message the forward and after arrival draft.

(b) In the case of all vessels, cable "Shipserv Pilharb Perth".
  (i) 72 hours before intended arrival at the Port advising ETA at the Pilot boarding ground East of Malus Island, including in the message if not previously given the forward and after arrival draft.
  (ii) 48 hours before intended arrival confirmation or any variation of ETA.
  (iii) 24 hours before intended arrival confirmation or any variation of ETA.

APPROACHES: From the 100 fathom line in Lat. 19° 20′ S, Long. 116° 20′ E, a channel 15 miles wide, leading 157° was surveyed by the Royal Australian Navy in 1963 and found to be clear of dangers. This approach is recommended for ships arriving from the North and N.E. Ships arriving from the West pass North of Tyrell Rocks situated to the N.W. of the Monte Bello Islands and then should pass not less than five miles to the North of Rosemary Island on the Latitude of Legendre Island Light. When in a position 6 miles West of Legendre Island Light, course should be altered to the S.W. to pass into the Archipelago.

PILOT STATION: The Pilot boarding area commences from a position bearing 090° distance 1.5 miles from Courtenay Head Light, thence 195° distance 2 miles, thence 090° distance 1.7 miles, thence 015° distance 2 miles, thence 270° distance 1.7 miles to point of commencement. Pilotage is compulsory for all vessels entering, leaving and manoeuvring within the Port except those of a tonnage of 150 tons or less and those whose Masters hold a valid pilotage exemption. Pilotage services operate from the pilot cutter "Pilbara Star".

MAX. SIZE: (Bulk Berth) Length 1,030 ft.; Draft 56 ft.; Beam 156 ft.

HEALTH: In the case of all vessels arriving from overseas following information shall be sent to port health authorities between 12 and 24 hours before arrival, addressing message "Port Health, Pilharb Perth" and prefixing the message "Shipserve". (Also see "Melbourne").

Post Office closes down from 1700 hrs. Friday to 0900 hrs. Monday. Vessels arriving at a weekend should ensure that health messages are received before 1700 hrs. Friday.

(i) the expected hour and date of arrival of the vessel.
(ii) Confirmation that the Master has individually inspected all persons on board within 24 hours of arrival and that there are no cases of febrile illness (high temperature or fever) or skin rashes on board.
(iii) Particulars of any cases of illness on board.
(iv) Confirmation that all persons on board are satisfactorily vaccinated against smallpox and in possession of valid Vaccination Certificates.
(v) A request to cross the Port Quarantine line.
(vi) On receipt of quarantine message Harbour Master will advise anchorage position if vessel not berthing on arrival.
(vii) Inspections may be carried out at the jetty or at anchorage at the discretion of the Quarantine Officer.
(viii) Rat guards are to be maintained on all mooring lines while vessels are berthed in Dampier Harbour.

RADIO:

Call Sign	Dampier Port control
Frequency	Channels 16, 67, 11, 13, 72 and 68.
Channels	11, 13 and 72 are port working frequencies.
Channel 68	Can be used vessel to vessel.

Channel 67 is an emergency working frequency.

A continuous watch is maintained on VHF Channel 16. All vessels approaching the Port or at anchor must maintain a continuous watch on this frequency.

TUGS: Pilbara Harbour Services Pty. Limited own and operate the tugs and lines launches which are available to shipping at all hours.

The following craft are available to assist in berthing and unberthing and for hire:

"Pilbara Mars"	1,700 h.p.	Bollard Pull	27 tons
"Pilbara Comet"	2,400 h.p.	Bollard Pull	33 tons
"Pilbara Neptune"	1,900 h.p.	Bollard Pull	28 tons
"Pilbara Jupiter"	2,600 h.p.	Bollard Pull	42 tons

Three (3) Lines Launches
Two (2) Workboats – 400 h.p.

MOORING: Mooring lines are taken ashore by linesboat. Vessels using heavy wire ropes are requested to have the ends terminated with a 9 m. (30 ft.) rope spring finished with a standard eye for placing over the bollards and slip hooks.

All mooring ropes and wires to have a 6 m. (20 ft.) tail of light rope spliced into the eye to facilitate the transfer from the boat to the dolphin.

Vessels shall be ready in all respects to commence loading on completion of mooring, hatches cleaned and opened.

LOADING IRON ORE: Red, green and white list lights, clearly visible to the shiploader operator are recommended fittings on all vessels loading iron ore. A fixed white light shall indicate the vessel is upright.

Masters are cautioned the loading of iron ore is carried out by draft. Frequent "on the run" draft checks between hatch changes should be carried out. Whilst shiploading sequences are equipped with weight scales, these figures are to be used only as a guide and reference to them will not relieve the Master of the responsibility of adequately maintaining draft checks and supervising the loading accordingly.

Final confirmation of tonnages on board will be the result of a draft survey carried out by the Master and the Company's surveyor.

Ballast shall be adjusted to ensure at high water a minimum clearance of 0.64 m. (2 ft.) is maintained between the vessel's structures and the shiploader. Ballast to be discharged at a rate which prevents disruption to loading, final trimming and completion.

STOWAGE FACTORS: The following stowage factors are provided for guidance:

Lump ore	16.0 cu.ft./ton	Fine Ore	15.0 cu.ft./ton
Low Grade Ore	16.5 cu.ft./ton	Pellets	18.5 cu.ft./ton

PARKER POINT ORE JETTY: The ore jetty consists of a tubular steel pile structure carrying a deck and rail traverse of a slewing boom shiploader.

Eight multi-spring pile dolphins fitted with hardwood facings are situated clear of the ore jetty structure and vessels berth port side alongside and moor to these dolphins.

Iron ore is the only product handled and following are principal dimensions:

Length of jetty:	268.9 m. (882 ft.)
Depth of water alongside:	15.5 m. (51 ft. at ISLW)
Travel of shiploader:	166.2 m. (545 ft.)
Radius of ore delivery from fender Facing	23.2 m. (76 ft.)
Ht. under side boom above I.S.L.W.	21.64 m. (71 ft.)
Total length of fendering, No. 1 to No. 8 dolphins	354.8 m. (1,164 ft.)
Rated capacity of shiploader:	6,000 long t.p.h.

The ore jetty is connected to the East Intercourse Island departure channel by a 152.4 m. (500 ft.) wide departure channel dredged to 14 m. (46 ft.) ISLW in 1969.

Parker Point ore loading facility accommodates vessels up to 130,000 d.w.t.

The maximum departure draft from this berth is 15.24 m. (50 ft.) on certain tides. However, it may be necessary for vessels of this size with deeper draft to part load and complete at East Intercourse Island.

EAST INTERCOURSE ISLAND ORE JETTY: The ore jetty consists of a tubular steel pile structure carrying a deck and rail traverse of a slewing boom shiploader.

Nine multi-spring dolphins fitted with hardwood facings are situated clear of the ore jetty structure and vessels berth starboard side alongside, mooring to these dolphins.

Length of jetty 341.4 m. (1,120 ft.), depth of water alongside 18.59 m. (61 ft.) at ISLW. Travel of shiploader 237.8 m. (780 ft.). Radius of slew of loader boom from fender facing 25 m. (82 ft.). Ht. underside boom at ISLW 23.55 m. (77 ft. 3 in.). Total length of fendering No. 1 to No. 9 dolphins 429.8 m. (1,410 ft.). Rated capacity of shiploader: 7,500 long t.p.h.

The ore jetty is connected to the open sea by a 167.6 m. (550 ft.) wide departure channel dredged to 15.85 m. (52 ft.) ISLW.

East Intercourse Island ore loading facility accommodates vessels up to 150/160,000 d.w.t. The departure draft from this berth is 17.07 m. (56 ft.) however a slightly greater draft may be permitted on certain tides.

SERVICE WHARF: All general cargo is received over this facility and vessels are acceptable up to a max. draft of 7.69 m. (25 ft.).

The wharf consists of steel sheet pile cells constructed in water of surrounding depths of 7.01 m. (23 ft.) below ISLW.

A berthing basin 243.8 m. (800 ft.) long and 38.10 m. (125 ft.) wide has been dredged to a depth of 8.23 m. (27 ft.) ISLW on the Western side.

The wharf is 69.5 m. (228 ft.) in length and faced with piles on which are secured rubber fenders. Mooring buoys are positioned off the N.E. and S.W. extremity of the wharf and head and stern lines are secured to these buoys.

Generally ships berth portside to this facility and normal discharge is carried out by 3 gangs using ship's own gear.

Vessels are required to berth ready in all respects to work cargo with hatches open and cargo gear rigged.

On completion, vessels may be required to vacate the berth and cover hatches, stow gear, etc., at anchor.

Tankers delivering oil products are accommodated at this wharf.

MISTAKEN ISLAND SALT BERTH: The salt berth owned and operated by Dampier Salt Limited consists of a tubular steel pile approach structure carrying conveyor belt to a fixed position, cantilever shiploader.

7 multi-spring pile mooring dolphins are situated clear of the shiploader platform, ships berthing starboard side of these dolphins.

Due to the fixed nature of the loader, ships have to be warped along the line of dolphins, to bring each hatch in sequence under the loading boom.

This wharf was built by Dampier Salt Limited, for the handling of salt from their salt pans, situated 6.4 km. from the wharf. The following are the principal dimensions:

Total length of fendering No. 1 to No. 7 dolphins	358.2 m. (1,175 ft.)
Depth of water alongside:	12.5 m. (41 ft.)
Outreach of loader boom from line of fendering:	18.29 m. (60 ft.)
Ht. under side boom at ISLW:	19.51 m. (64 ft.)
Rated capacity of shiploader:	2,800 long t.p.h.

MEDICAL: A doctor is permanently resident at Dampier and a modern 41-bed General Hospital is situated in the town site.

STEVEDORES: Three gangs available (use ship's gear).

CARGO GEAR: See "Melbourne".

FIRE PRECAUTIONS: 1 firefighting tug.

FUEL/WATER/REPAIRS: Fuel for ships' bunkers is not available.

A limited supply of fresh water is available in an emergency.

Stores and provisions can be arranged. For large orders Masters are recommended to cable their Agent giving 7 days notice of their requirements.

Ship repairs of a limited nature can be carried out at the Port. (Note: Port of Dampier By-Laws No. 23).

A 500-ton slipway is available for slipping small craft and tugs.

GANGWAY/DECK WATCHMEN: Crew.

OPENING/CLOSING HATCHES: By crew.

SHIP CERTIFICATES: See "Melbourne".

REPATRIATION: Limited facilities available.

AIRPORT: Twice-daily service to Perth, and twice-weekly service to Darwin. Karratha Airport is 15 km. from the port.

TIME: GMT plus 8 hours.

TELEPHONES: Ship-to-shore telephones are available at all berths for ship-to-shore communications. Ships and jetty telephones are barred access to STD and trunk line facilities.

SERVICES: None available.

AUTHORITY: Pilbarra Harbour Services Pty. Ltd., Dampier.

AGENT: Sub-agent of Patrick Agents, Fremantle.

DARWIN, N.T.: 12.28 S. 130.50 E. (See Plan Book)

LOCATION: The port is located in a sheltered land locked position on the Eastern side of the harbour and is accessible by vessels of draft up to 12.20 m.

DOCUMENTS:

2 Crew Lists, Form M & S 11
5 Passenger Lists Form M310.
1 Port of Call List.
1 Barber's stock and ship's shop stock Form 5AA.
1 Crew Personal Effects List Form 5.
1 Stores List Form 42A.
Last Port Clearance.
Ship's Log.
Light Dues receipt (if valid).
Port Dues receipt (if valid).
Safety Certificates: Construction
Equipment
Loadline
Radio.

Customs and Immigration: Darwin is a First Port of Entry. Australian Commonwealth Regulations apply. Customs and Immigration Officers will attend at any hour. Twenty-four hours initial notice is required and two hours notice of amendment.

PILOTAGE: Pilotage is compulsory for all vessels exceeding 20 metres LOA unless a current pilotage exemption certificate is held by the Master.

Notice of arrival and ordering of Pilot must be addressed to Harbour Master, Darwin not less than 24 hours before estimated time of arrival at Channel Rock Buoy. This message must be confirmed or amended two hours before arrival at Channel Rock Buoy. During business hours the two hour confirmation may be given by VHF radio. In all cases local time (GMT – 0930 hrs.) must be used.

Boarding ground is Channel Rock Buoy where vessels embark Pilot or anchor to await Pilot. Usual safety precautions are to provide a lee and have pilot ladder with manropes on lee side.

Notice of intention to depart shall be given to the Harbour Master, not less than 6 hrs. before the time of the intended departure.

The vessel shall not depart before the time specified without the permission of the Harbour Master.

When Darwin is the first port of entry, include in message: "Wharfside Clearance Requested".

Pilotage Information: See AUS 27, AUS 28, Admiralty Pilot Vol. V, Admirality List of Lights Vol. K, Australian National Tide Tables, Marine Information Manual Australia. The buoyage system is being converted from the "lateral" to the IALA "System A". The changeover is expected to be completed by the end of 1979.

ANCHORAGE: Good holding ground in sand and/or mud can be had with Channel Rock Buoy bearing between 045°T and 135°T distant 6 cables or in the Quarantine Anchorage with "Q" buoy bearing between 095°T through North to 270°T distant 3 cables.

RESTRICTIONS: Radio pratique may be granted on application to Department of Health. This means vessel may be berthed, Doctor and Customs then board and clearance is given alongside. Berthing may be restricted by tide conditions and draft but necessary for Master and Agents to contact Harbour Master when ETA is known; Agent then notifies vessel as to when berthing will take place.

MAX. SIZE: *Fort Hill Wharf* – length 350 ft., least depth alongside 24 ft. *Note.* The water shallows abruptly immediately inside the line of the inner piles.

Stokes Hill Wharf – outer face length 960 ft., least depth 32 ft. Will take ships up to 800 ft. Inner face length 700 ft., least depth 15 ft.

Bulk Iron Ore Wharf – length (dolphin berth) 922 ft., least depth 38 ft.

Also see "Berthing".

HEALTH: Commonwealth Regulations apply. Health officers will attend at any hour. Twenty-four hours initial notice is required.

Vessels should avoid anchoring near the sunken wreck marked "foul", situated one cable Westward of the Quarantine Buoy. (Under the Quarantine Regulations, vessels are required to inform the Director of Health by radio of the state of health on board the vessel, and are advised to request wharf-side clearance.)

Application direct to Health Department providing vessel healthy, if granted will enable berthing on arrival and clearance alongside providing also that berth available. A vessel arriving from another Australian port with pratique granted is not required take any further action. Should vessel have suspected fever or disease on board it should be reported by radio to Health Department who take whatever action necessary. Also see "Melbourne".

Vessel carrying a qualified Medical Officer may be granted radio pratique. There is a Quarantine Station with accommodation for forty people, at East Arm, accessible by boat from the Quarantine Anchorage.

RADIO: Darwin Radio, call sign VID 6204 kc/s. 2182 kc/s. R/T 500 kc/s.

RADAR/VHF: No port radar; VHF Channel 16 contacts Harbour Master's office and pilot vessel.

Port Operations and Communications: Port operations are controlled by VHF – FM radio on the following frequencies, call sign "Darwin Harbour":

Channel 16	–	156.80 Mhz	– Calling and Safety
Channel 12	–	156.60 Mhz	– Tug working
Channel 6	–	156.30 Mhz	– General working.

A continuous watch is maintained on Channel 16 in business hours (0800–1630) Monday to Friday. Outside these hours and on public holidays an intermittent watch is kept and calls will be answered if heard. Port operations are in telephone contact with the Fire Brigade, Police, Ambulance, Shipping Agents and Authority executive staff.

The pilot boats and workboats are equipped with VHF and HF radios. The Authority Pilots carry portable VHF units while on duty.

TUGS: Join off berth. Charge made if tug's towing line is used.

A tug service is provided by Coastal Tug and Barge Company. This company also provides a boat for running mooring lines.

The tug is m/v *Goyder* which is 1,200 h.p. Bollard pull 12 tons. Transport to vessels at anchor can also be arranged through this company.

BERTHING: Some tide restrictions during springs particularly Fort Hill berth.

Ore Wharf (No. 5 berth): Length of berth face 142 m. Extension of West Dolphin 66 m., East Dolphin 69 m. Concrete decking on steel piles. Central vehicular access, western end ore belt access. Full length fendering of rubber protected steel beams on rubber blocks designed to absorb up to 40,000 tons-force impact. Suitable for vessels up to 230 m. LOA. Depth of water 11.60 m. Deck height above datum 10.15 m. Travelling ore loader with transit range of 120 m., outreach 14.00 m.; gross load rate 1,100 tonnes per hour. Ore gear can be adapted to other bulk materials.

Petroleum product lines installed:

30 cms. black oil 15 cms. marine diesel
25 cms. white oils 10 cms. L.P.G.
20 cms. distillates

for discharge of tankships and loading of bunker fuel.

Security gates and watchmen are available for tanker operations. Discharge rates of up to 300 t.p.h. can be accepted (1,000 kpa).

Fort Hill Wharf (No. 4, 4a, 4b Berths): "T" head jetty, length 107 m. Least depth on outer face 7.30 m. On the inner faces two berths of 48 m. length and 4.90 m. depth. Concrete deck on steel piles, height 10,50 m. above datum. A central ramp is installed to enable loading of livestock at any stage of tide. Mooring buoys are sited 76 m. east and west to enable vessels up to 185 m. LOA to berth. Fitted for discharge of cement in bulk. Petroleum product lines installed:

30 cms. black oil 15 cms. distillates
20 cms. white oils

Stokes Hill Wharf (Berth 1, 2, 3, 3a, 3b): Concrete decked steel pile wharf with trestle approach. Used for general cargo, container and passenger ships on outer face; small general cargo and fishing vessels berth on inner face.

Length of main berth 292 m. and least depth 9.75 m. Least depth on inner berths 4.75 m.

The decking is ramped between sheds to provide height above datum of 10.60 m. outer face and 9.50 m. inner face as well as both flush and truck height access to sheds.

The outer face berths are connected to the North Australian railway system. Parts of the deck are strengthened for container handling. Wheel loadings of 6 tonnes can be allowed on any part of the wharf. There are 2 storage and transit sheds totalling 3,200 square metres floor area and the usual offices and amenities.

Priorities:

Navy: Bunkers only.
Passenger Ships: one day.
Freezer Ships: two days.
A.N.L. Container Vessel and State Shipping Service vessels: two days.
Tankers: Priority at Fort Hill Wharf.
Tankers: Priority at Ore Berth if no Ore Ship is waiting.
Ore Carriers: Priority at Ore Berth.

Application for a berth must be made to the Harbour Master *before* the vessel's arrival.

STEVEDORES: ETA at least 24 hrs. before arrival as labour ordered before 1330 hrs. the day before required, except week-ends when labour ordered at 1330 hrs. on Friday for Saturday, Sunday, and Monday requirements.

Waterside labour for cargo operations other than iron ore loading, tanker cargoes, and certain small exempt local traders and fishing vessels, is supplied through the Australian Stevedoring Industry Authority and ordered by the various stevedoring companies. The waterside workers' hours and conditions of employment are fixed by award agreement between the Waterside Workers Federation and employees.

The main features concerning labour are: Two shifts Sunday to Friday:

Day	0800 to 1500 hrs.
Evening	1500 to 2200 hrs.
Saturday	0800 to 1200 hrs.

Labour will extend 4 hours on Saturday and 2 hours other days if vessel can finish and sail.

Labour for Monday has to be ordered before 1300 hrs. on the previous Friday.

MEDICAL: Full medical services are available. A modern hospital is situated two miles from the Port and a second hospital is in the process of being built. Certificates required for smallpox vaccination and cholera if vessel from certain overseas countries.

TANKERS: (Also see "Berthing") Night movements subject to Harbour Master's permission. Usual to berth vessel at high water if necessary and discharge cargo to safe draft by next low water.

Oil cargoes are discharged at Fort Hill or Ore wharves. Shell Oil Company own or lease pipe-lines to handle their own cargo. Other oil companies sub-lease the lines from Shell for their cargoes.

Approximate discharging rates are:

Black Oil	400 t.p.h.
White Spirit	300 t.p.h.
Distillate	100 t.p.h.

DENSITY: Considerable variations experienced. Average 1025.

FRESH WATER: Fresh water is laid on to all berths, at a rate of 30 tons per hydrant per hour, the cost being 17c per ton and $3.00 connecting fee.

FUEL: All grades of bunker fuels are available at each berth except the Boom Wharf (distillate only). Bunkering rates (depending on connection sizes) up to 150 tonnes per hour.

FIRE PRECAUTIONS: Watchman at approach to wharf. Towing-off wires on off side of vessel.

GANGWAY/DECK/WATCHMAN: Required, owing to large rise and fall of tide. Ship's crew or shore watchman. Gangways and watchmen can be provided on application to Wharf Supervisor.

OPENING/CLOSING HATCHES: Optional, if alongside usually done by watersiders; not alongside by crew.

CUSTOMS ALLOWANCES: 200 cigarettes. One bottle spirits (26 oz.) three bottles beer.

Regulations of the Commonwealth Department of Customs and Excise apply. The Customs Department also act for the Immigration Department.

CARGO GEAR: As required by Australian Navigation Act. See "Melbourne".

The Port Authority and private firms have available for hire:

Cranes (Mobile) up to 50 tonnes capacity.
Fork lifts up to 10 tonnes.
Trailers 10 tons capacity.
Container Side Loaders – 25 tonnes capacity.
Tractors.

The above equipment is available for use outside the wharf area when not required for cargo operations.

Hiring rates and conditions for all equipment are available on application to the Wharf supervisor.

FLOATING PLANT: 56 ft. (17.07 m.) pilot vessel *Larrakia*. Speed 12 knots. Fitted with radar, echo sounders, HF and VHF radios and fire fighting and oil dispersal equipment. Has sleeping accommodation for six and when not on pilotage duty is available for hire in Northern Territory waters to approved bodies for survey work etc. Daily rates on application to Harbour Master.

25 ft. (7.62 m.) pilot vessel *John Stokes*. Speed 9 knots. Fitted with echo sounder, HF and VHF radios. When not on pilotage duty, is available for harbour hire for approved purposes.

CLIMATE: Monsoonal in character with prevailing cool dry S.E. winds from May to September, and warm, most N.W. winds and frequent showers from November to March, while April and October are variable. Cyclones, which are common on both East and West coasts of Northern Australia, rarely affect Darwin. Rainfall averages 60 in. (152-40 cm.) per year and temperature ranges from a mean daily maximum of 91°F (32.7°C) in October and November to a mean daily minimum of 68°F (20°C) in June and July.

Average monthly rainfall to the nearest inch is: Jan. 16 in., Feb. 12 in., March 11 in., April 3 in., May 0.5 in., June nil, July nil, Aug. nil, Sept. 0.5 in., Oct. 2 in., Nov. 4 in., Dec. 9 in.

TIDES: Darwin is a standard port (B.A. 6323) and full predictions are given in the Australian National Tide Tables published annually. Maximum range is 7.93 m. and mean range is 3.72 m. Tidal streams have a maximum rate at springs of 3 knots in the channels and 2 knots in the vicinity of the berths.

IDENTIFICATION CARDS: See "Melbourne".

CONSULS: Portuguese and Indonesian.

REPAIRS: Limited small repairs. Slipway capacity 150 tonnes displacement and 5.0 m. draft, depending on tide.

DIVERS: Divers are available.

SHIPPING OFFICE: Shipping Office facilities are available for engagement and discharge of British crews.

SURVEYORS: The Commonwealth Department of Transport maintains a surveyor. There is a private surveyor who is also a Lloyds surveyor.

REPATRIATION: Facilities available.

AIRPORT: International and domestic flights.

TIME: GMT plus 9.5 hours. Permanent.

HOLIDAYS: Extraordinary Holidays (closed port). Good Friday; Labour Day (1st May); Picnic Day (1st Monday in August); Christmas Day (25th December). Other Holidays: New Year's Day (1st January); Anniversary Day; Easter Saturday; Easter Monday; Anzac Day; Queen's Birthday (June); Boxing Day.

POLICE/AMBULANCE/FIRE: Tel.: Police 81-5555; Ambulance 81-2244; Fire 81-2222.

TELEPHONES: Public telephones are installed on Fort Hill and Stokes Hill Wharf. Direct lines to taxi companies on Stokes Hill Wharf. Ship's telephones connection on application to Wharf Supervisor. Connection and disconnection fee $10; $5 per day for local calls; and trunk line calls as booked.

DELAYS: Port congestion and occasional short delays for tide.

SERVICES: *Provisions:* All classes of fresh, frozen and preserved provisions, free and bonded stores are available.

Garbage: Garbage bins are placed at the gangway and cleared daily. There is a compulsory charge.

Storage: Storage space bond and free, bulk and general, short or long term is readily available in the port area. Freezer storage is available distant between 2 and 5 miles from the Port.

Accommodation: There are numerous modern hotels, motels and restaurants.

Shore power: Shore power at 415 v. 50 Hz. 3 phase AC up to 60 amps per point at all berths.

Fumigation: Deratisation and fumigation facilities are available.

DEVELOPMENTS: Design work is proceeding on a project for a landbacked deepwater berth on the site of the Fort Hill Wharf to serve vessels of up to 200 m. LOA and 12 m. draft.

Work is in hand on a common user barge terminal and fishing berth complex at Frances Bay. Land reclamation is proceeding in both Stokes and Frances Bays.

AUTHORITY: The Port Superintendent, NT Port Authority.

AGENT: Sub-agent of Patrick Agencies, Sydney, NSW.

DERBY, W.A.: 17.17 S. 123.35 E. (See Plan Book)

CERTIFICATES/DOCUMENTS: See "Melbourne".
PORT LIMITS: All waters to South and Eastward of a line through Valentine Island in a 053° – 233° direction to the mainland on each side.
PILOTAGE: Not compulsory but recommended. Private Pilots arranged by Agents at Fremantle or Derby. Pilot boards Cockatoo Island in Yampi Sound. Two weeks advance notice required of Pilot requirement.
ANCHORAGES: N.N.W. of North Mary Ann Island with Derby front lead bearing 141° dist. 6.4. miles.
RESTRICTIONS: Numerous islands and reefs, strong tides. Navigate during day.
MAX. SIZE: 575 ft. length.
HEALTH: First port of entry. Vessel examined for pratique alongside. Also see "Melbourne".
VHF: Limited VHF, Channels 6 and 16.
BERTHING: Tide range one of biggest in the world. Berth alongside dries 2 ft. 6 in. at springs. Several patches dry, 1 – 2 ft. Ground in berth level and it is "Practice of Port" vessels stay aground if stay over tide. Important to note above for circulating water for ships auxiliaries, as vessel makes own arrangements on board.
STEVEDORES: Irregular, but usually three gangs, 0800 – 1700 hrs. with reasonable overtime.
TANKERS: Oil – discharge connection 236 ft. from Southern end of jetty.
FRESH WATER: Up to 224 tons at 15 t.p.h. Could be restricted by drought.
TIME: GMT plus 8 hrs.
CARGO GEAR: Due to extreme range of tide vessels with short derricks will have difficulty at LW. Also see "Melbourne".
AUTHORITY: Harbour and Light Dept., Fremantle.
AGENT: Sub-agent of Patrick Agencies, Fremantle.

DEVONPORT, Tasmania: 41.09 S. 146.24 E. (See Plan Book)

PORT LIMITS: Within all waters that extend 3 miles to seawards bounded on the Eastward by an imaginary line drawn 000° distance 3 miles from the coastline and intersecting the most Easterly point of Wright Island and to the Westward by another imaginary line drawn 000° distance 3 miles from the Western side of the entrance to the River Don.
DOCUMENTS: See "Melbourne".
APPROACHES: Port situated 1 mile inside Mersey River, entrance to which sheltered by Mersey Bluff on West and by breakwater on East bank. Good anchorage in vicinity boarding ground, but inadvisable remain at anchor during strong on-shore winds. Inner harbour provides all-weather shelter.
PILOTAGE: Compulsory. 24-hr. service. Pilots will board when required at a position within 400 m. of a point Mersey Bluff Lighthouse bearing 242° by 1.93 km.

Masters of vessels requiring the service of a Pilot are advised to radio the Harbour Master, Devonport, their ETA and vessel's draft 12 hours prior to arrival.
ANCHORAGE: The quarantine anchorage is defined as to the North of a line running East and West through the Mersey Bluff light. Vessels must lie clear of the fairway into the River.
RESTRICTIONS: Approach channel 26 ft. LW. Tidal range 9 ft. Enquiries should be made for vessels exceeding 29 ft. draft or 600 ft. length.
MAX. SIZE: Vessels 16,000 g.r.t., LOA 182.9 m. and draft 8.5 m. have entered safely.
VHF: 24-hour service on Channel 16, Channel 12 working.
TUGS: Modern tug 1,200 h.p. also auxiliary 250 h.p. Additional tugs available at short notice.
BERTHING:
West Wharf:

No. 1 Berth	length 167.6 m.	depth 8.5 m.
No. 2 Berth	length 189 m.	depth 8.5 m.
No. 3 Berth	length 167.6 m.	depth 7.8 m.
No. 4 Berth	length 198 m.	depth 8.5 m.
Stock Jetty	—	depth 4.27 m.

East Wharf:

No. 1 Berth. Length 122m. Ferry berth with stern loading facilities and passenger terminal. Depth alongside 7.01 m.

No. 2 Berth. Length 213 m. Roll-on/Roll-off ramp. Depth alongside 8.5 m.
TANKERS: 2 berths with 10-in. discharge lines for black and white oils.
BULK HANDLING FACILITIES:

Tallow: One berth, loading connections from 1,500 tonne capacity silos.

Wheat. One berth, discharge connections to 8,000 ton capacity silo.

Cement. One berth, loading connections from 4,000 ton capacity silos.

Ores, etc. Two berths. One fitted with 16-ton grab and 40-ton capacity hopper. Ship's gear discharge on wharf apron on second berth. Conveyor available to load industrial sands.

Roll-on/Roll-off Container Berths. 2 berths fitted with stern loading ramps. Fully equipped to handle cellular and vehicle deck ships. 1 travelling crane 30 ton capacity. One 30-ton travelling container handling crane. 6 acres hardstanding storage area for ISO container. 60 power points for refrigerated units.

Livestock Berth. 1 jetty with loading ramp and adjacent holding area. Suitable for ships up to 250 ft. length.

Floating Crane: Capacity 35 tons available.
STEVEDORES: Agents for ships arrange stevedores.
MEDICAL: Hospital available five miles from port.
REPAIRS: Limited repairs carried out, foundry and machine shop available.
SURVEYORS: Lloyds surveyor in residence at Devonport.
CARGO GEAR: Australian Navigation (Loading and Unloading) regulations apply.
FRESH WATER: Available all wharves. 40 t.p.h.
FUEL: Road tanker delivery only.
TELEPHONES: Available each berth.
HOLIDAYS: Work all days except Christmas Day, Good Friday, Anzac Day, Labour Day, Picnic Day W.W.F.
POLICE/AMBULANCE/FIRE: Fire 24–1886 (Other than alarm, 24–1887); Police 24–1596; Ambulance 24–1551.
TIME: GMT plus 10 hrs. (Summer time GMT plus 11 hrs. mid-October to mid-March).
AIRPORT: Approximately 5 miles away. Regular service.
SERVICES: Shipwrights and carpenters available at 24 hours notice. Underwater diving services available.
DEVELOPMENT: Widening Ramp at No. 1 Berth East from its present 12 ft. to 30 ft.

Channel improvements including widening and deepening of channel.

Harbour protection rock breakwater on Western bank under construction.

Extension to wheat silos storage to increase capacity by 50%.
AUTHORITY: Marine Board of Devonport.
AGENT: Sub-agent of Patrick Agencies, Melbourne.

ESPERANCE, W.A.: 33.52 S. 121.53 E. (See Plan Book)

DOCUMENTS: The following documents should be available for inspection:

Ship's Papers, including the following certificates:
(*a*) Register.
(*b*) Load Line.
(*c*) Safety Equipment.
(*d*) Safety Radio.
(*e*) Safety Construction.
(*f*) Australian Light Dues Receipt.
(*g*) Articles of Agreement and Account of the Crew (or equivalent).
(*h*) Western Australian "Port Bill" — Tonnage Dues Receipt.
Valid Deratisation or Exemption Certificate.
Crew's Identity Documents.
International Vaccination Certificates of all persons aboard.
PILOTAGE: Pilotage is compulsory except where Exemption Certificates are held. Radio "Harbour Master – Esperance" 48 and 24 hrs. before arrival. VHF Channel 16 – pilot boat and base set. Base set not manned continuously but pilot boat may be contacted 1 hr. before arrival. Pilot boat painted white with black rubbing band and white centre house. Word "Pilot" painted on both sides of house. Pilot boards 1.5 miles N.E. of Gull Island. Pilot ladder and ancillary equipment must comply with international regulations. Lee to be provided against swell.

It is more usual for vessels to approach from the Westward. In this case use may be made of either West or Causeway Channels. Approaching from the Eastward is not recommended during the hours of darkness or in weather which is in any way restricting visibility.
ANCHORAGE: Vessels proceeding to anchorage should anchor in an E.N.E. direction from the Eastern extreme of the breakwater. Good holding is found in depths ranging from 14.5–27.5 m. However, plenty of cable should be veered and at least 6 shackles is recommended. In the most boisterous conditions vessels have held well with from 6 to 8 shackles out. However, the vessel should always be watched. A pilot ladder and not accommodation ladder is recommended for vessels at anchor due to the swell conditions which normally prevail at the anchorage.
PRATIQUE: Vessels requiring "Free Pratique" are cleared between 0600 and 2000 hrs. daily.

Vessels may be cleared outside these hours upon request and at the discretion of the local Medical Officer.

Vessels are cleared alongside and rarely at anchor.

Please also note that a Health Message is required at the first port of entry from overseas. This is to be despatched within the period 12 and 24 hrs. prior arrival at the first port of entry, and to advise the following information:
Name of vessel, and ETA.
Last port of call.
Date of departure.
Number of crew on board.
Number of passengers on board (if any).
Confirmation that all on board have valid smallpox vaccinations and details of any sickness.
RADIO: Esperance: Radio call sign VIE (operative from 0700 to 2000 hrs.). Perth: Radio call sign VIP (continuous).

Port VHF limited to Channels 6 and 16. Call sign "Esperance Harbour".
TUGS: One tug with 9.5 ton bollard pull will be used.
BERTHING: The Inner Harbour consists of one land-backed berth of 244 m. (No. 1). A second berth of 213 m. in length adjoining the

first is to the S.E. (No. 2). The depth in the approach Channel, manoeuvring area and alongside is 11 m. Maximum draft permitted is 10.0 m., pending maintenance dredging, and length overall 186 m. On occasions it may be possible to exceed this draft but reference must be made to the Harbour Master before so doing, who may at his discretion permit an increase dependent on tide and prevailing weather conditions.

At all berths shore coir and/or nylon springs are used to supplement ships moorings.

24-hr. port but entry not generally carried out at night.

Tankers berth at No. 2 Berth, Inner Harbour. Tankers berth during daylight hours only but may be permitted to sail at night at the discretion of the Harbour Master.

Tanker discharge line 14 in. reduced to 8 in. at discharge manifold. Average discharge rate 465 tonnes per hour.

STEVEDORES: 40 men. Working hours 0800–1700, 1800–2400, 0000–0700. No work from 1700 Saturday to 0800 Sunday. ETA to Agent by 1600 previous day for labour requirements Tuesday to Friday. For weekend requirements ETA to Agent by 1600 on Thursday. For Monday labour ETA to Agent by 1600 Friday. Notice for labour pick-up has to be posted by 1700.

OPENING/CLOSING HATCHES: Preferably handled by crew or as per charter party.

MEDICAL: Advance notice not required. Normal facilities and hospitalisation available.

DENSITY: 1026–1028.

FRESH WATER: Available at all berths; 25 t.p.h.; charge, 35 cents per kilolitre.

FUEL: Available by road tanker only. Advise Agent of grade and quantity at least one week before arrival.

GANGWAY/DECK WATCHMEN: Shore watchman is supplied at entrance to Tanker Berth in the case of tankers only. Shore watchmen are available if requested by vessel. It is more normal for ship to provide gangway watchmen from crew. Irrespective a gangway watchman must be on duty at all times at any berth.

CUSTOMS ALLOWANCES: 200 cigarettes or 250 grammes cigars or 250 grammes tobacco. One litre of alcoholic liquor, wine or beer.

CARGO GEAR: No shore cranes and discharge effected by ship's gear. Inner Harbour berths, two link belt bulk loaders used. One loader for grain and salt at No. 1 berth. One loader for nickel concentrates at No. 1 and No. 2. Rates achieved on various commodities — salt 850 t.p.h., grain 500 t.p.h., nickel concentrates, copper concentrates, magnesite 200 t.p.h., phosphate and sulphur 25/30 t.p.h. with conventional ship's gear in union purchase.

IDENTIFICATION CARDS: see "Melbourne".

CONSULS: Nearest at Fremantle.

REPAIRS: Welding, rewinds, under-water inspections. Large structural repairs not possible.

DRY DOCKS: Nil.

REPATRIATION: Facilities exist for repatriation of crews.

AIRPORT: Feeder airline services connect with Perth and international flights. 12 flights per week in either direction. Airport is 25 km. from harbour area. No flights Sundays.

TIME: GMT plus 8 hrs.

POLICE/AMBULANCE/FIRE: Police Esperance 711900; Ambulance Esperance 711711; Fire Esperance 712328.

TELEPHONES: Available all berths.

SHORE LEAVE: Crew allowed ashore provided Immigration Act complied with in relation to Identification Cards.

DELAYS: Not normally encountered.

AUTHORITY: Esperance Port Authority.

AGENT: Sub-agent of Patrick Agencies, Fremantle.

FREMANTLE, W.A.: 32.03 S. 115.44 E.

(See Plan Book)

DOCUMENTS: See "Melbourne". Also Inward and Outward manifests accordance Regulations Nos. 142 and 143 and schedule. These documents supplied by ship's Agents.

APPROACHES: Channel leading from Gage Roads into Cockburn Sound presently 45 ft. (13.7 m.) deep, planned to be deepened to 55 ft. (17 m.) to take ships of 120,000 tonnes.

PILOTAGE: Pilotage is compulsory in the Port of Fremantle except for ships not exceeding 150 gross registered tons, and for coastal and inter-state ships, the Masters of which hold operative Pilot Exemption Certificates. There are 2 pilot boarding grounds: the outer boarding ground which is situated 3.5 n.m. N.E. of Bathurst Point, Rottnest Is., and the compulsory pilot boarding ground in Gage Roads to the Westward of Hall Bank Buoy, which is approximately 2 miles from the entrance to the Inner Harbour. Note: Pilotage is compulsory from the Outer Boarding Ground for ships drawing 11.6 m. or more but is otherwise non-compulsory. It is necessary for all vessels to give 24 hours notice by radio telegraphy of the expected time of arrival at Fairway Buoy, followed by a second notice, confirming or amending the previous notice, 2 hours ahead of the expected arrival time in that locality.

Ships requiring a Pilot at the non-compulsory ground must include this requirement in their 24 hours notice of arrival.

Two pilot vessels available, one has royal blue hull, white superstructure and the other, a fast pilot launch, is painted international orange. Pilots may be contacted by VHF Channels 16, 12 and 6.

Usually pilot ladder is required on the port side for vessels inward and starboard side for vessels outward, even when the wind is in the East, unless Easterly wind is very strong as there is nearly always a West to N.W. swell. If in doubt call Port Signal Station on VHF Channel 16.

Pilot does not board vessel at anchor.

Pilot ladder to be 4-5 ft. above sea level with manropes slightly shorter. Boat-rope not required. The ladder should be clean and conform with Regulation 17 of SOLAS. The vessel should be making 3-4 knots.

SOLAS regulations are strictly adhered to i.e. Single length of ladder, non-slip surface (Aluminium Not acceptable), 12 in. spacing between steps, no more than 2 replacement steps, all ropes on ladder and manropes to be manila and not covered (Nylon and polypropelene not acceptable), Regulation 17(a) part (VII) and (VIII) very important, a responsible officer to standby and not a sailor.

Check with Signal Station and find out if Pilots preference is ladder or mechanical hoist (if available).

ANCHORAGES: Gage Roads 44 ft. (13.4 m.) Owen Anchorage 42 ft. (12.8 m.) Cockburn Sound 50 ft. (15 m.).

RESTRICTIONS: *Inner Harbour:* Basin and entrance channel dredged to minimum of 36 ft. (11 m.) below datum.

Outer Harbour: Main approach channels dredged to minimum of 45 ft. (13.7 m.) below datum – secondary channels leading to alumina refinery jetty and steelworks jetties dredged to minimum of 38 ft. (11.6 m.) below datum.

MAX. SIZE: Limited by draft. Minimum under-keel clearance of 0.9 m. required.

Outer Harbour, up to 41 ft. 6 in. (12.6 m.) draft.

Inner Harbour, up to 32 ft. (9.7 m.) draft but with suitable tide and by special permission of Harbour Master up to 34 ft. 6 in. (10.5 m.) draft.

Tankers: The maximum ship draft acceptable at the Oil Refinery Jetty at Kwinana is 41 ft. 6 in., this being the maximum draft permitted in the approach channels.

HEALTH: No restrictions except quarantine. Doctor not normally available between 2200 and 0600 hrs. See "Melbourne".

Port Quarantine Regulations:

(a) The accommodation, galley and other areas must be free from cockroaches and rodents.

(b) Garbage cans, either belonging to the ship or to Fremantle Port Authority, when used must be at all times covered with satisfactory tops.

(c) Rat guards must be fitted to all lines and regularly checked including weekends where the Department of Health have increased their inspections.

It is also to be noted regardless of the existence of current derating or deratisation exemption certificates, all vessels are inspected for rodents.

RADIO: VIP Perth.

TUGS: *Inner Harbour:* 5 available up to 2,600 h.p. (1,940 kW), join vessel in Gage Roads – extra charge if tug's line is used.

Outer Harbour: Inner Harbour tugs proceed to Outer Harbour berths also where 2 special tugs equipped as fire tenders are also stationed. Tugs join ships approx. 2.5 miles from berths – extra charge if tug's line is used.

VHF: Port authority signal station manned 24 hours. Keeps watch principally on Channel 16. Channels 6 and 12 used for ship-tug communications. Channel 14 for B.P. Refinery use.

BERTHING: *Inner Harbour:* Victoria Quay – continuous quayage 5,359 ft. (1,633.3 m.); 8 berths.

North Quay – continuous quayage 5,877 ft.; 10 berths. Container berth (No. 11 & 12) 1,427 ft. (429 m.); 1 berth.

All berths in the Inner Harbour, including Victoria Quay, North Quay and the container berth are dredged to a minimum of 36 ft. (11 m.) below datum.

Outer Harbour: Alumina Refinery Jetty, length of berth 800 ft. (244 m.), depth 38 ft. (11.6 m.). Steelworks Jetty No. 1, length of berth 640 ft. (195 m.,) depth 36 ft. (11.0 m.). Steelworks Jetty No. 2, length of berth 880 ft. (268 m.), depth 40 ft. (12.2 m.). Oil Refinery Jetty, see "Tankers" below. Bulk Cargo Jetty, length of berth 846 ft. (259 m.), depth 44 ft. (13.4 m.).

A bulk grain jetty has been constructed at Kwinana to serve Co-operative Bulk Handling Ltd's grain terminal.

The jetty is equipped with conveyors and ship loaders capable of handling bulk grain at the rate of 5,000 t.p.h. It will eventually be able to handle vessels up to 100,000 d.w.t.

STEVEDORES: Shipboard stevedoring by private contractor, shore side by FPA – usually arranged by ship's Agent. ETA should include particulars of cargo, showing heavy lifts, dangerous or hazardous cargoes, hatch stowage, gangs required, etc.

MEDICAL: Notice not necessary but advisable if treatment required. Full hospital facilities available. Cholera and smallpox vaccinations essential if ship comes from affected areas. International certificates must be current.

TANKERS: *Kwinana Oil Refinery Jetty:* 2 berths for tankers up to 752 ft. (229 m.) – depths 44 ft. (13.4 m.) and 45 ft. (13.7 m.) 1 berth for tankers up to 860 ft. (262 m.) – depth 45 ft. (13.7 m.). Oil separation tanks ashore serve each berth.

DENSITY: Salt 1025, generally at all tides.

FRESH WATER: Available 24 hrs. a day, delivered by hose up to 400 tonnes an hour, 40 cents per kilolitre for quantities up to 200 tonnes. 45 cents per kilolitre for larger quantities.

Note: The current water shortage in the Fremantle area may limit the amount of water which can be supplied to ships.

FUEL: Marine fuel (2 grades); Marine diesel. Notice 14 days then 48 hrs.

FIRE PRECAUTIONS: Watchman to be on duty. Ship heading out. Fenced off on land. Buoys 50 ft. (15 m.) out from ship marking prohibited area.

DEVELOPMENTS: State Government approval has been granted in principle for the development of 3 deep-water berths at Point Peron adjacent to the causeway linking Garden Island with the mainland.

No. 12 Berth, North Quay will be fitted with a ro/ro ramp, and another Portainer Crane is to be provided for North Quay.

Bulk Cargo Jetty Expansion at Kwinana: Work is under way on the extension to the bulk cargo facility at Kwinana, Western Australia. Completion of the project is anticipated in October 1978 and will provide additional common user bulk facilities in Cockburn Sound. The project covers the construction of a 228 m. extension of the berth to the southern end of the existing berth. Steel piling for the foundations is completed and work on the decking has commenced. The berth will be capable of providing power, water and bunkers when required. The basic intention is to have a deep draft berth, depth alongside 48 ft., channel depth 41 ft. 6 in., with bulk loading facilities such as a mobile elevator. Further facilities and services will be provided if demand warrants. Fixed shore cranes are not planned but the use of mobile cranes will be possible.

GANGWAY/DECK WATCHMAN: Watchman required – member of crew, or shore-based watchman available. Ordinary rate currently A$4.90 an hour.

OPENING/CLOSING HATCHES: By arrangement between ship's Agent and Stevedore.

CERTIFICATES: Health; Deratisation; Load Line; Ship's Register; Articles. Also see "Melbourne".

CUSTOMS ALLOWANCE: According to local customs dept.

CARGO GEAR: Strict surveillance of cargo handling gear by Commonwealth Government Dept. of Transport. Also see "Melbourne".

IDENTIFICATION CARDS: See "Melbourne".

CONSULS:

America, United States of
Austria
Belgium
Denmark
Finland
France
Germany
Guatemala
Italy
Japan
Netherlands
Norway
Philippines
Portugal
Sweden

REPAIRS: All types of deck and engine repairs possible.

DRY DOCKS: No dry docks – slipway up to 3,000 T.

REPATRIATION: Facilities exist for repatriation of crews.

AIRPORT: 17 miles (23 km.) to Perth International Airport.

TIME: GMT plus 8 hours.

HOLIDAYS: *Extraordinary Holidays – Port closed:* Labour Day (1st Monday in March); Good Friday; Anzac Day (25th April); Union Picnic Day (celebrated on the first Tuesday in November); Christmas Day (25th December).

Ordinary Holidays: New Year's Day (1st January); Australia Day (celebrated on a Monday late in January); Easter Monday; State Foundation Day (1st Monday in June); Boxing Day (26th December).

On ordinary holidays waterside labour available to work ships in following categories:

(a) Scheduled passenger ships.
(b) Marine casualties.
(c) Ships that can complete cargo handling operations prior to the next engagement of labour.

POLICE/AMBULANCE/FIRE: Victoria Quay Police Station Tel. 335.2783 or 335.5016; Ambulance 335.1601; Fire Brigade 335.6262.

TELEPHONES: Telephones can be supplied to any vessel – $60 installation time plus proportion of annual rental plus cost of calls.

SERVICES: All special services available.

REGULATIONS: Normal port regulations. Special Regulations for Tankers berthing at Oil Refinery Jetties.

AUTHORITY: Fremantle Port Authority.

AGENT: Patrick Agencies, POB 656, 10, Phillimore Street, Fremantle, W. Australia 6160. Tel. 335–6311. Telex Perth AA 92434. Cables: "Rikpat Perth WA."

GEELONG, Victoria: 38.09 S. 144.22 E.

(See Plan Book)

PORT LIMITS: A line in a 150.5° direction from a beacon 1.5 chains West of the Little River entrance intersecting with a line in a 009° direction from the N.W. extremity of Sproat St., Portarlington. N.B. – This seaward limit passes 2 cables Eastward of No. 2 beacon Pt. Richards channel.

DOCUMENTS:

3 Crew Lists Form M & S 11.
Store List Form 42A.
1 Articles owned or in possession of Master, officers or crew, Form 4.
3 ports of call Form C & E 886.
1 Form QA 3 ship's cargo.
1 Form QA 4 ship's pets.
2 Form QA 5 Shipmaster's bond.
2 Form AQ 260 Health reports.

PILOTAGE: See "Melbourne". Radio ETA to "Seapilots Melbourne" 24 hours prior arrival advising deepest draft and requesting pratique. Pilot vessel equipped with radio-telephone continuous watch on 2182 kHz., and VHF Channels 16, 12, 8 and 6. Pilots carry portable sets. Deep laden tankers advised to rig pilot ladder from bridge to avoid swamping boat.

ANCHORAGES:

1. Quarantine. As directed.
2. Explosives.
   (a) Outer: 088° from Pt. Wilson Beacon 3.52 miles. Circle 0.25 miles (463 m.) radius. Depth 32 ft. (9.7m.).
   (b) Inner: 077° from Pt. Wilson Beacon 1.77 miles. Circle 0.15 miles (278 m.) radius. Depth 21 ft. (6.4 m.).
3. Vessels over 30 ft. (9.1 m.) draft: outside No. 2 Beacon Pt. Richards and South of the line of prolongation of the Pt. Richards Channel. Least depth 12.5 m.
4. Vessels over 27 ft. 6 in. (8.4 m.) draft: East of and within 1 mile of No. 18 Beacon Pt. Richards Channel. Least depth 9.1 m.
5. Inner Harbour: Reference Point B.W. Pier F.R. Triangular Light 38° 6.9′ S., 144° 21.8′ E.).
   (a) 067° 9.3 cables (1,722 m.) from the above position. Least depth 29 ft. (8.8 m.).
   (b) 092° 8.2 cables (1,520 m,) from the above position. Least depth 29 ft. (8.8 m.).
   (c) 117° 8.7 cables (1,612 m.) from the above position. Least depth 29 ft. (8.8 m.).
   **(d)* 133° 1.42 miles (2,163 m.) from the above position. Least depth 26 ft. (7.9 m.).
   **(e)* 147° 1.43 miles (2,631 m.) from the above position. Least depth 26 ft. (7.9 m.).

**(d)* and *(e)* are preferred anchorages for vessels requiring launch communication with the shore, for any purpose.

Masters of vessels are cautioned *(a)* that the bottom of the Inner Harbour is soft mud and is not good holding ground and *(b)* that vessels should not be immobilised unless with the express permission of the Harbour Master.

RESTRICTIONS: Vessel must have at least 2 ft. (0.6 m.) of water under the keel with a maximum of 6 in. (0.15 m.) for tide.

Night navigation is not normally permissible for any vessel over 10.4 m. draft or inward 215 m. in length.

MAX. SIZE: Tankers: 825 ft. (250 m.) length with 34 ft. 6 in. (10.5 m.) draft. Other vessels: Enquiries should be made with regard to vessels over 658 ft. (200 m.) length.

HEALTH: An overseas vessel approaching the port requiring pratique shall send a message to the Quarantine Officer not more than 24 hours and not less than 12 hours before arrival containing the following information: name of vessel, ETA, number of passengers, number of crew, number of passengers disembarking, port of departure and date, disease on board.

By supplying by radio to Agent the answers to 12 questions on the form Q.2 (below), the vessel may be permitted to berth prior to the granting of pratique.

Question		*Answer*
A.	Name, type and nationality of vessel	
B.	Itinerary for last 15 days. If over 15 days from last port, please give name of port and date of departure.	
C.	Name of first Australian port and E.T.A.	
D.	Number of crew.	
E.	Number of passengers.	
F.	Have you had cases of illness accompanied by a temperature of 38°C or above for more than two days, or accompanied by rash, jaundice or glandular swelling during voyage?	
G.	Have you had any deaths on the voyage? If so, please give details.	
H.	Have you had cases of illness including diarrhoea sufficiently severe to interfere with normal work or activity during the voyage?	
I.	Have you had persons suffering from veneral disease during the voyage?	
J.	What live fish, birds, reptiles or other animals are you carrying? Ships' pets should be mentioned.	
K.	Have you carried livestock on previous voyages in the last six months? If yes, please advise type of livestock, date of voyage and ports visited. Have all stock-carrying compartments been thoroughly cleaned and disinfected?	
L.	Do you request approval to berth?	

On arrival the health report shall be given to the Quarantine Officer, 2 copies being furnished on the prescribed form, 1 of which will be signed by the Quarantine Officer and returned to the Master.

RADIO: Coastal radio station for local messages "Radio Melbourne" VIM. The Geelong Harbor Trust Commissioners maintain a Signal Station at Point Henry at which a 24-hour watch is kept. (38° 7′ 51″ S., 144° 25′ 28″ E.). The building is a cream brick tower 11.3 m. in height to the roof, situated at the Northern end of the high land of Point Henry, and is surmounted by a white signal mast. Movement of traffic within the port is controlled through the Signal Station. Communication is affected as follows:

1. Telephone. Geelong 9-8014.
2. Radio Telephone VHF F/M (International Channel).
   (i) Channel 16. 156.8 M/cs. Calling (continuous watch).
   (ii) Channel 12. 156.6 M/cs. Working.
   (iii) Channel 8. 156.4 M/cs. Pilots and Tugs (continuous watch).
   (iv) Channel 6. 156.3 M/cs. Tugs.
   (v) Channel 67. 156.375 M/cs. Safety.

These frequencies are the same as those operated by the pilot vessels, Point Lonsdale Signal Station, Melbourne Harbour Control and all Port Phillip Tugboats on commercial towage.

TUGS: Vessels normally towed from Hopetoun Channel to berth, extended towage if required. 3 large tugs available. Use of tug's line optional. Tugs equipped with VHF Channels 6, 8, 12 and 16.

STEVEDORES: Labour ordering: Day labour must be ordered by 1600 hrs. the preceding day. Twilight shift labour by 1600 hrs. preceding day, and midnight shift, but these can be subject to confirmation 0800 hrs. Saturday labour must be ordered by 0900 hrs. Friday, Sunday labour by 1100 hrs. Friday (day and twilight shift), Sunday midnight before 0900 hrs., Friday. Monday labour is ordered at 1600 hrs. Sunday. Ships can order for a 1000 hrs. start, at 1600 hrs., which is subject to 0800 hrs. confirmation. Special requirements exist for labour requirements on public holidays.

BERTHS:

	No.	*Length* (m)	*Depth* (m)	*Use and facilities*
Cunningham Pier	4	328	9.7	Gen. cargo – cargo shed 137m. × 15 m. Rail access.
Bulk Wheat Pier	2	201	11.0	Bulk grain export. Gantry extends 154 m. of berth.
Corio Quay South 1	1	183	9.7	Stern loading ramp for roll-on/roll-off. Rail access.
Corio Quay South 2	1	128	9.7	Reserve.
Corio Quay South 3	1	146	9.7	Reserve.
Corio Quay North 1	1	183	9.7	Steel and dry bulk cargo.
2	1	183	9.7	Rail access Four 6 t. Portal cranes. Gen. cargo shed 91 m. × 30.5 m.
Corio Quay North 3	1	161	9.7	Gen. cargo shed 97.5 m. × 27 m.
Lascelles Wharf 1	1	173	11.0	Dry bulk cargo.
2	1	173	11.0	Four 7.5 ton Portal cranes. Cargo shed 30 m. × 27 m.
Refinery Pier 1 & 2	2	213	11.0	Petroleum products.
3 & 4	2	275	11.0	Crude oil, chemicals and LPG export.
Pt. Wilson Explosives Pier	2	168	9.1	Dangerous cargo. Commonwealth Government controlled.
Pt. Henry	1	152	9.1	Bulk alumina and allied products. Unloading gantry.

TANKERS: Refinery Pier. 4 berths, depth alongside 36 ft. (11 m.) Pumping platform 16 ft. (4.9 m.) above low water, wharf 12 ft. (3.7 m.) above low water. One-ton crane at each berth and accommodation ladder.

Nos. 1 and 2 Berths: Pier 2,909 ft (887 m.) long, direction 315° berth 700 ft. (213 m.) approx., suitable for ships up to 200 m. LOA. Ships moor to 2 spring dolphins 61 m. apart; pumping platform set back 1.7 m. from line of these dolphins. Barge platform inshore of each berth.

Nos. 3 and 4 Berths: a branch from the main pier, direction 330°, berth 275 m. approx., suitable for ships up to 260 m. LOA. Ships lie alongside a concrete sprung berthing beam 73 m. in length. No. 4 Berth equipped with capstans and 90 tonnes S.W.L. mooring hooks for berthing large vessels. Distance between backspring bollards 35 m. 8 in. hoses – reduction from 10 in. available. Shore accommodation ladder provided at all berths. Ballast and slop discharge available all berths.

MEDICAL: Comprehensive medical facilities available, including 459-bed Geelong Hospital. If vessel to be in port less than 24 hours it is advisable to radio Agent informing him of medical requirements prior to vessel's arrival.

DENSITY: Normally 1025, may decrease to 1023 after much rain, or increase to 1027 in Summer after prolonged dry spell.

FRESH WATER: Available at all berths from shore hose at 40–50 t.p.h. Water may be provided to vessels at anchor by using a tug as waterboat, delivery 25-30 t.p.h., tug hire $150 per hour. At Lascelles Wharf, special water delivery facilities available from 9 in. main at 150 t.p.h. Charge 30c per kilo.

FUEL: Marine fuel to 650 sec. and diesel fuel available Corio Quay North and Lascelles Wharf; all grades to 3,500 sec. available at Refinery Pier berth.

FIRE PRECAUTIONS: Stringent restrictions against burning or welding on vessels carrying dangerous cargoes. Standard fire precautions.

GANGWAY/WATCHMEN: Available if required by Master. Penalty rates after hours.

OPENING/CLOSING HATCHES: Crew or stevedores, to Master's requirements. It is normal to request bulk carriers to arrive at berth with hatches all open.

CERTIFICATES:

Deratisation Certificate (Health Requirement).
Ship's Articles (British) (Customs requirement).
Ship's Register (Customs requirement).
Load Line Certificate (Customs requirement).
Safety Equipment Cert. (Customs requirement).
Safety Radio Cert. (Customs requirement).
Last Port Clearance (Customs requirement).

CUSTOMS ALLOWANCE: 200 cigarettes, 250 gm. pipe tobacco, 40 cigars. Spirits: any bottle opened not to exceed 1 litre.

CARGO GEAR: Australian Navigation Act requirements. See "Melbourne".

IDENTIFICATION CARDS: See "Melbourne".

CONSULS: Consulates in Melbourne available if required:

Austria
Belgium
Brazil
Chile
China
Denmark
Dominican
Ecuador
Finland
France
Germany
Greece
Honduras
Iceland
Italy
Japan
Latvia
Mexico
Monaco
Netherlands
Norway
Panama
Peru
Philippines
Portugal
Spain
Sweden
Switzerland
Thailand
Uruguay
USA
Venezuela

REPAIRS: All services available. Most Melbourne repair and service firms will also undertake work in Geelong.

DRY DOCKS: Slipways only.

REPATRIATION: Possible without difficulty.

AIRPORT: Nearest major commercial airport is Tullamarine, 50 miles distant, from which there are frequent interstate and international flights. Airport accessible by road in about 1 hour 15 minutes.

TIME: GMT plus 10 hours. Summertime, GMT plus 11 hours.

HOLIDAYS: Closed holidays: Christmas Day; Waterside Workers' Picnic Day; Labour Day; Good Friday; Anzac Day (Tanker operations excepted). Other holidays: Australia Day; Queen's Birthday; Geelong Cup Day.

TELEPHONE: Always placed aboard on arrival; ship charged for trunk line calls, etc.

SERVICES: Cleaning, painting, fitting out, etc., fumigation. Good fresh stores available.

POLICE/AMBULANCE/FIRE: Police 21 6111; Ambulance 21 2655; Fire 21 2755.

SHORE LEAVE: No restrictions. Seamen aboard vessels berthed at Refinery Pier sign book on leaving pier and again on re-entering; this is in lieu of any form of dock pass.

AUTHORITY: The Geelong Harbor Trust Commissioners.

AGENT: Sub-agent of Patrick Agencies, Melbourne.

GERALDTON, W.A.: 28.46 S. 114.36 E.

PORT LIMITS: Inner Harbour includes all that area of water in Champion Bay bounded by a line drawn from Gregory Street, Geraldton, along the foreshore to a point due South of the Western extremity of the breakwater; thence along the breakwater to the Western extremity of the Eastern breakwater; thence S.E. to the foot of the said Gregory Street, and also including the Entrance Channel thereto.

Outer Harbour includes all that area of water in Champion Bay bounded by an imaginary line between Point Moore Lighthouse to a point 2.5 miles true North; thence true East of the shore to the mainland, but excluding the waters of Geraldton Inner Harbour and the Entrance Channel thereto.

ETA: "Shipserve Harbour Master Geraldton" requires 48 and 24 hrs. notice prior arrival. The 24 hrs. message should be timed to be delivered before 1630 hrs. local time on the day before arrival so that arrangements can be finalised, when possible, in working hours. Please also indicate maximum draft in the 48 hrs. notice.

Vessels arriving in ballast are requested to retain all clean ballast until after berthing. Discharging ballast before arriving may preclude berthing if strong wind conditions prevail.

DOCUMENTS: Quarantine notice and declaration QA3 Form A, Quarantine Notice QA 4 Form E2, Shipmaster's Bond QA 5, Departure Notice, 2 Crew Lists. Also see "Melbourne".

PILOTAGE: Compulsory. Pilot boards in position Point Moore Lighthouse 2.2 miles, bearing 135°. If conditions abnormal pilot launch may not be able to reach this position then Port Control will advise boarding point. Usually off No. 1 Buoy (formerly Inner Knoll Buoy).

ANCHORAGE: Vessels of up to 150 m., Moore Pt. Lt. Ho. 195° distance 2.2 miles in 11 m. Vessels in excess of 150 m. are advised to anchor close to and to seaward of Pilot boarding ground, unless weather conditions are excellent. The former position is referred to as the "Inner Anchorage" and the latter, the "Outer Anchorage".

MAX. SIZE: Length 213 m.; Beam 30.4 m. Permissible drafts: 8.7 m. at LW – 9.1 m. at 0.8 m. of tide, 9.3 m. at 1.1 m. tide provided swell at Waverider buoy does not exceed 3 m. Vessels wishing to load to maximums dependent on tide prevailing should contact Harbour Master before so doing.

RESTRICTIONS: Swells up to 5.0 m. in outer approaches. Loaded ships advised not to enter when swell excessive.

Bluff Point leads or Outer Channel. Depth of water 10 m., minimum LWIS width of channel 180 m.

Curved section of channel. Depth of water 9.7 m. to 9.4 metres LWIS.

Inner Harbour channel and Manoeuvring area. 9.1 m. LWIS. Depth alongside berths: No. 2-5 9.4 m. LWIS.

HEALTH: First port of entry, radio Port Authority not less than 12 hours prior to arrival advising state of health. Also see "Melbourne".

TUGS: One 13 tons bollard pull and one 6 tons bollard pull. Compulsory.

RADIO: VHF available for communications with Pilot. Channels 6, 9, 12 and 16. Continuous watch not maintained.

BERTHING: The wharf is divided into 4 berths numbered 1, 2, 3 and 4 from East end, 3, 167 m. in length and the fourth 181 m.

No. 1. Berth has a transit shed with a 1,000 ton capacity, and an old shed which has been used for bulk storage of wheat and salt. The berth is used as a general purpose berth.

No. 2. Used as the tanker berth, and also for the discharge of bulk phosphate, sulphur and allied cargoes. Also for loading bulk cargo other than wheat. General cargo can also be handled and facilities are available for the holding and loading of sheep. Has an unobstructed apron of 27.5 m. for almost the full length of berth.

No. 3. Berth mainly for loading of bulk grain. There are 2 loading gantries on the wharf each capable of loading wheat at the rate of 400 t.p.h.

No. 4. It is possible to use No. 4 for general purposes, but a loading gantry and conveyor system at the berth is used for loading mineral sands. Max. rate 1,000 t.p.h. Air draft for loader not to exceed 11 m.

No. 5 berth is situated to the West of the main wharf and runs in a NNE direction. The berth is 213 m. in length with mooring dolphins either end. Currently the berth is used for general purposes.

CARGO GEAR: See "Melbourne".

STEVEDORES: 55 men working hours 0800–1700 hrs. Monday – Friday. Extended shifts Monday – Thursday. Evening shifts all days except Saturday.

FRESH WATER: At each berth 25 t.p.h.

FUEL: Light diesel oil 80 t.p.h.

REPAIRS: Engine repairs available.

CUSTOMS ALLOWANCES: Each crew member 200 cigarettes or 40 cigars or 8 oz. tobacco and limited amounts spirits per man.

TIME: GMT plus 8 hrs.

TELEPHONES: Available at each berth (ordered through Agent).

AUTHORITY: Geraldton Port Authority.

AGENTS: Sub-agent of Patrick Agencies, Fremantle.

GLADSTONE, Queensland (including Barney Point): 23.50 S. 151.15 E. (See Plan Book)

PORT LIMITS: Inside a line commencing at a point 1.5 miles North of East Point, Facing Island; thence to the outer extremity of Jenny Lind Bank, and thence by a line to Tiber Point.

DOCUMENTS: See "Melbourne".

PILOTAGE: ETA's may be sent through Brisbane or Rockhampton Radio Stations, not less than 24 hours before arrival, followed by amended advices where necessary as takes pilot launch 2 hours to reach Pilot boarding Ground from town. Pilotage compulsory all merchant ships. Pilot boards at Pilot boarding Ground situated approx. 1 mile off the Entrance Beacons. VHF Channel 16 may be used to contact Pilot station, call sign "Gladstone Harbour Control"; 24 hour watch maintained. Pilot boat also has VHF. Pilot boat orange launch and displays usual signals.

ANCHORAGE: Good anchorage inside Gatcombe Head about 7 cables South of Bushy Islet in 8 to 10 fathoms, sand and mud, North of Facing Island leads.

RESTRICTIONS: The port is served by an entrance channel, some 6 miles long, with a bottom width of 183 m., dredged to 10.36 m. at low water.

The allowable draft of a vessel passing through the channel is determined by the following formula:

Allowable draft in metres = 10.36 m. + tide height −1.5 m.
The 1.5 m. is deducted to allow for keel clearance.
The max. daily tide height is 4.9 m.
The min. daily tide height is 2.7 m.

Tankers carrying petroleum products may enter during hours of darkness only at Harbour Master's discretion.

MAX. SIZE: Max. draft for entrance channels varies from 11.58 m. (38 ft.) to 12.80 m. (42 ft.), depending upon tidal conditions. Length and breadth dependent upon wharf to which vessel is to proceed. Principal wharves are:

Auckland Wharf	No. 1	Depth 11.28 m. at LW
,, ,,	No. 2	,, 10.05 m. ,,
,, ,,	No. 3	,, 10.05 m. ,,
Barney Point		,, 12.20 m. ,,
South Trees	East	,, 13.72 m. ,,
,, ,,	West	,, 12.28 m. ,,

HEALTH: Pratique granted when alongside wharf, unless proceeding anchorage inside port, which case quarantine officials board anchorage. Agents should be advised in advance in event any suspected fever or disease on board. Pratique granted in Australian ports normally covers vessel for any subsequent ports. Also see "Melbourne".

RADIO: Radio messages passed to Agents via any coastal radio station. All shipping cables to Agents, etc., should be prefixed "Shipserv" to enable delivery destination outside ordinary postal hours if necessary.

TUGS: 4 tugs in service. Tugs normally join vessel in vicinity of South Trees Point. Tug's lines always used when vessels are piloted. There is no extra charge for use of tug's lines.

BERTHING: Large vessels requiring load coal either Auckland Point Wharf or Barney Point Wharf normally swing and berth starboard side to, head to sea, on flood tide. Smaller vessels using these berths either port or starboard side to, depending upon tide. Vessels requiring discharge bauxite South Trees Island Wharf berth at periods of slack water (high or low) only. Vessels loading alumina this wharf berth either on flood tide or slack water – *never* on ebb tide.

Auckland Wharf: 3 berths owned by Gladstone Harbour Board, total length of wharf 578 m. with dolphins at either end. Cargo handled: coal, wheat, sorghum, petroleum products, general and heavy lifts.

Barney Point: 1 berth owned by Theiss Dampier Mitsui Coal Pty Ltd., total length of berth 205 m. with dolphins. Cargo handled: coal.

South Trees Wharf: 2 berths owned by Queensland Aluminia Ltd., total length of wharf 483.41 m. with dolphins at either end. Cargo handled: alumina, caustic soda, bauxite and fuel oil.

STEVEDORES: Special ETA advices necessary if week-end labour required and must be ordered by 1400 hrs. on previous Friday. Monday Labour for vessels arriving after Friday must be ordered by 1500 hrs. on Friday. The only commodities requiring shore labour are bulk grain and general cargo

MEDICAL: Dependent duration stay in port, prior notice for medical attention not required (other than notice of infectious diseases). Hospital facilities available. Current vaccination certificate for each member of crew required.

TANKERS: Diameters of discharge lines 12 in., (0.305 m.) and 8 in. (0.203 m.) for white oils and 6 in. (0.152 m.) black oils. No slop discharge facilities. Main tanker berth at Auckland Point Wharf min. depth alongside 33 ft. (10.06 m.) LWOST. Black oil also discharged South Trees Island Wharf for use in alumina plant only.

DENSITY: Average density 1024–1028.

FRESH WATER: Available all wharves. Fresh water hydrants placed at intervals along wharves.

FUEL: Available ex-wharf at Auckland Point for quantities up to 1,500 tonnes. Diesel and distillate available all wharves ex-road only. Coal also available.

FIRE PRECAUTIONS: Where petroleum and goods of dangerous inflammable character are being unloaded, watchman shall be employed to collect matches from all persons in vicinity and to patrol wharf within the limits in which petroleum cargo is being handled. Every vessel carrying inflammable liquids when in any Queensland port shall display red flag, not less than 1 m. (3 ft.) square with white circular centre 15 cms. (6 in.) in diameter.

OPENING/CLOSING HATCHES: Either by ship's crew or shore labour.

GANGWAY/DECK WATCHMEN: Services of watchmen is not recommended except in the case of petroleum tankers previously mentioned.

SHIP CERTIFICATES: List of certificates usual for Australian Ports. See "Melbourne".

CARGO GEAR: To be in accordance with Commonwealth Navigation (Loading and Unloading Safety Measures) Regulations. See "Melbourne".

CUSTOMS ALLOWANCES: 0.5 lb. of tobacco or 200 cigarettes, to be opened. 1 only 26 ounce bottle, to be opened.

IDENTIFICATION CARDS: See "Melbourne".

CONSULS: None.

REPAIRS: Minor engine and deck repairs are undertaken.

DRY DOCKS: None available. Slipway capable of lifting vessels up to 125 tons displacement with max. beam 23 ft. and max. draft forward of 6 ft.

REPATRIATION: Facilities for effecting crew changes and necessary repatriations can be arranged. Prior notice required.

AIRPORT: Airport approximately 5 miles from port and is regularly served by 2 internal airlines. 4 daily flights to Brisbane where connections with overseas airlines.

TIME: GMT plus 10 hours.

HOLIDAYS: Only 5 official holidays in year when it is *not* possible to

BULK HANDLING FACILITIES: *See Table below.*

Location Number of Units	Auckland Point No. 1 2	Auckland Point No. 2 1	Barney Point 1	South Trees East 1	South Trees West 2
Type of Unit	Mobile Gantry Loader	Mobile Gantry Loader	Mobile Gantry Loader	Mobile Gantry Loader	Mobile Gantry Grab Unloader
Length of Travel (metres)	142 (Combined)	121	149	168	198
Max. Outreach from Wharf (metres)	15.2	28.3	16.2	25.6	26.7
Throw of Trimmer (metres)	15.2	N/A	11.0	N/A	N/A
Max. Beam of Vessel (metres)	32	30.5	35.4	35.4	35.4
Capacity (t.p.h.)	1,600	400	2,000	1,200	2,000
Commodity Handled	Coal	Grains	Coal	Alumina	Bauxite
Storage (Tons)	300,000	42,000	400,000	238,000	1,000,000

arrange cargo work: Christmas Day; Anzac Day (25th April); Labour Day (1st Monday in May); Good Friday; Picnic Day (2nd Friday in July).

POLICE/AMBULANCE/FIRE: Telephone number of these services in cases of emergency only is "000" and ask to be connected to the required service. Emergency call to Hospital is 72.1033.

TELEPHONES: Public phones available on wharf.

DEVELOPMENTS: The channels to the port were deepened in 1974. The changes are as follows: Entrance Beacons to South Trees, to 10.3 m. (34 ft.) LWOST. South Trees to Barney Point 9.5 m. (31 ft.) LWOST.

GENERAL: No cranes on wharves. Mobile cranes available for hire. No lighterage facilities. Electricity available to ships. Passengers not normally embarked or disembarked this port, as no facilities for them.

SERVICES: No tank cleaning facilities. No slop facilities.

SHORE LEAVE: Crew members allowed ashore provided vaccination certificates in order.

DELAYS: No unusual delays other than berth availability or unusual tidal conditions.

AUTHORITY:

1. The Harbour Master, Department of Harbours & Marine.
2. Gladstone Harbour Board.

AGENT: Patrick Agencies, POB 374, 59 Gondoon Street, Gladstone, Queensland 4680. Tel. 72–2511. Cables: "Rikpat Gladstone" Telex: AA 49459. Ansetts.

GOVE, N.T.: 12.12 S. 136.40 E. (See Plan Book)

DOCUMENTS:

2 Crew Lists Form M. & S. 11 (3 at outports).
5 Passenger Lists, Forms M. 308 and 309.
1 Port of Call List.
3 Barber's stocks and stock in ship's shops and canteens (Form 5) continuation of the back Form 5 AA.
1 List of Customable Articles, Form 5 (crew).
3 Return of Goods of Barber's stock, etc., Form 5 AA.
3 Stores List Form 42 A.
1 Clearance from Last Port.
Ship's Log.
1 Derat. Certificate.
1 Light Dues if paid previously.

PILOTAGE: Compulsory for vessels proceeding to Nabalco facilities. The Pilot will board at the anchorage position.

ANCHORAGE: Melville Bay affords good holding ground, the bottom being either sand or mud and the depths ranging up to 48 ft. (14.64 m.) West of Dundas Point. Vessels awaiting a berth should anchor approximately 1.5 miles (2.41 km) Westward of West Woody Island close by the fairway buoy. The Quarantine Officer and Customs Officer normally clear vessels alongside the berth, but may on occasions board at the anchorage.

RESTRICTIONS: Approach Channel to bulk cargo and tanker jetties has min. depth 13.8 m.

Approach Channel to general cargo jetty has min. depth 30 ft.

PRATIQUE: The port of Gove has been declared a port of first entry for health clearance of vessels arriving from overseas.

The Commonwealth quarantine regulations provide for health clearance of a vessel between sunrise and sunset. However, the Quarantine Officer has direction to clear ships up to 2200 hrs. local time. Arrangements can be made for vessels to depart up to 2030 hrs. local time, as health clearance is not necessary for outgoing ships. Vessels will usually be cleared alongside the berth.

If pratique is required, vessel must provide:

(a) Primary Health Report;
(b) A Vaccination Register proving that all persons have been currently vaccinated against smallpox;
(c) Usual valid Cholera Certificate if the vessel is less than 5 days from a cholera-infected area.

RADIO: *Notice of Arrival:* Prior to arrival, vessels are requested to radio the following information:

(i) For all vessels:
  (a) ETA Gove – 72 hours out
  – 48 hours out
  – 24 hours out
  (b) Anticipated draft forward and aft.
(ii) For bulk carriers, anticipated hatch loading plan, loading sequence and quantity required in each pour.
  (c) For petroleum tankers, approximate quantities to be discharged and grade of product desired for first discharge, and order of unloading various grades if more than one grade is carried.

Radio messages should be addressed to "GOBAUX", Darwin. The call sign of the Radio Station at Darwin is VID. Radio messages will be passed by teleprinter to Gove.

Cable messages for Nabalco should be addressed to "SHIPSERV", Gove.

Vessels should note that berthing cannot be effected between 22.00 hrs. local time and sunrise unless quarantine clearance has been received.

VHF: The Nabalco Harbour Master's Office maintains a listening watch on Channel 16 during office hours. VHF frequencies used are 16, 12 and 6. Call sign "Gove Harbour".

TUGS: There are three work boats available for hire in the port, max. h.p. 2000. Tug's lines are used in most instances, but no extra charge is made.

BERTHING: *Bulk Cargo Wharf:* The bulk cargo wharf runs in a N.W./S.E. direction and bears 189° true 2,440 m. (8,000 ft.) from West Woody Island triangulation point. The wharf has a 'T' head which is connected to the shore by an access bridge 946 m. (3,120 ft.) long and 3.05 m. (10 ft.) wide.

The northern branch of the wharf head constitutes the bauxite/alumina berth and the southern branch the bulk liquids berth.

The bauxite/alumina berth is mounted with a travelling, luffing shiploader with telescopic trimming spout having an outreach of 31 m, (101 ft. 6 in.) from the fender line. The distance of travel along the berth is 164.2 m. (540 ft.). The clearance beneath the spout at maximum elevation for loading is 16.7 m. (55 ft.) above chart datum (low water ordinary Spring tide) at berth side.

The shiploader has a designed capacity of 2,000 metric t.p.h. for bauxite and for alumina.

The shiploader is connected by a belt conveyor system to the bauxite stockpiles and to the alumina silos, 3,202 m. (10,500 ft.) and 2,592 m. (8,500 ft.) distant respectively from the wharf head.

The bulk liquids berth consists basically of mooring dolphins and fenders associated with a pipe bridge support. Three pipe-lines are provided namely:

(1) 46 cm. (18 in.) diameter for bunker fuel oil.
(2) 30 cm. (12 in.) diameter for caustic soda.
(3) 25.4 cm. (10 in.) diameter for diesoleum, petroleum and aviation kerosene.

During the tanker discharging operations, connection between ship and shore is provided by 20.3 cm. (8 in.) diameter flexible hoses with BS Table "F" 8-hole fittings at each end. BAS reducers from 30.5 cm. (12 in.) to 20.3 cm. (8 in.) are available.

If other types of fittings are required to effect discharge, arrangements should be made by the tanker vessel to provide such items.

The length of each pipe-line is approximately 1,982 m. (6,500 ft.) covering the distance from bulk liquids berth to shore tank farm.

A depth of water of 13.9 m. (45 ft. 08 in.) below chart datum (at low water ordinary spring tide) is available at both the alumina/bauxite and bulk liquid berths.

This will allow simultaneous occupancy by a tanker and bulk carrier, each of up to approximately 60,000 d.w.t., under ordinary conditions. A minimum clearance under the keel of 10% of the draft is required for berthing and unberthing.

General Cargo Wharf: This wharf extends in a S.E. direction from the Eastern side of the land strip leading to Dundas Point. The wharf bears 315° (T) × 1,342 m. (4,400 ft.) from Half Tide Rock and is a substantial structure 94 m. (310 ft.) long by 27.89 m. (91 ft. 6 in.) wide connected to the shore by an access jetty 287.2 m. (950 ft.) long and 5.49 m. (18 ft.) wide.

The wharf has been designed for vessels of max. length of 182.8 m. (600 ft.) and of up to 20,000 d.w.t. to berth at each side under normal conditions. Vessels of up to 30,000 tons can be accommodated under suitable tidal conditions.

The depth of water alongside is 11.59 m. (38 ft.) below chart datum (low water ordinary spring tide) on both sides of the wharf head.

Jetty: A wooden jetty with a depth alongside of 4.27 m. (14 ft.) below chart datum (low water ordinary spring tide) is located at the head of Melville Bay. Use of this jetty is generally reserved for vessels of the landing barge type.

STEVEDORES: No local stevedoring companies.

TANKERS: See "Berthing".

FRESH WATER: Available at all berths.

FUEL: Not available, however distillate can be supplied ex-road tanker in cases of emergency at the general cargo wharf.

MEDICAL: Medical services and a large modern hospital with comprehensive theatre, medical and surgical facilities, at Nhulunbuy, 9 miles from the port.

AIRPORT: Gove is served by commercial flights to and from Darwin on 7 days a week and by commercial flights several times a week from Brisbane and Sydney via Cairns and Mount Isa. Services to other parts of Australia and the rest of the world are frequent from Darwin.

TIME: The time used is Zone −9.5, and all reference to time should be given in Local Time.

REPAIRS: Limited facilities, minor repairs only.

DENSITY: 1025.

SURVEYORS: Lloyds Surveyors available from Darwin.

HATCHES: Opening and closing carried out by ship's crew.

REPATRIATION: Facilities exist for effecting crew changes and repatriation.

CUSTOMS ALLOWANCES: 200 cigarettes and one litre of spirits per crew member.

IDENTIFICATION CARDS: Not required.

SHORE LEAVE: After clearing inwards crew members may proceed ashore without special permission.

REGULATIONS: It is forbidden to take firearms and alcoholic beverages ashore.

AUTHORITY: Nabalco Pty Limited.

AGENT: Agency undertaken by Nabalco Pty Limited.

GROOTE EYLANDT (Milner Bay), N.T.: 13.52 S. 136.25 E. (See Plan Book)

LOCATION: Milner Bay is situated on the Northwestern corner of Groote Eylandt which is itself situated in the Southwestern area of the Gulf of Carpentaria.

It is a "Port of First Entry" to Australia. Customs, Quarantine Doctor, Police, are in residence on the Eylandt.

DOCUMENTS:

3 Crew Lists.
5 Passenger Lists.
1 Port of Call List.
3 Stores Lists.
1 Crew's Personal Effects List.
Derat. Certificate.
Clearance from Last Port.

PORT LIMITS: The waters in Milner Bay bounded by a line commencing at the HW mark on the N.W. coast of Groote Eylandt in position Lat. 13° 50′ 05″ S. Long. 136° 24′ 29″ E. and proceeding in a 260° 44′ 10″ direction to a point in Lat. 13° 50′ 28″ S. Long. 136° 22′ 03″ E. at the high-water mark on the East coast of Connexion Islet; thence by a line following the contour of the coast of Connexion Islet at the HW mark to "Boulder" in position Lat. 13° 50′ 46″ S., Long. 136° 20′ 14″ E.; thence by a line bearing 151° 30′ to a position Lat. 13° 53′ 34″ S. Long. 136° 21′ 47″ E.; thence by a line bearing 80° 44′ 10″ to a point being Lat. 13° 52′ 54″ S. Long. 136° 25′ 58″ E. thence by a line following the contour of the coast at high-water mark to the point of commencement.

PILOTAGE: There is a Port Officer at Milner Bay who will assist Masters in berthing and departing from the jetty. Approaching Groote Eylandt from the Northwards, vessels should steer to a position 10 miles North of the Northeast Islet, which is rocky on the Northern coast and rises to grassy hills. From the above position, steer to pass about 3 miles North of Chasm Islet until the recommended track on chart Aus. 14 is reached. This track 221° passes about 1 mile East of Brady Rock (light GP. FL. (3) ev. 12 secs.) and continues on this course until Bickerton Island Light (FL. 5 secs.) bears 250° when the course should be altered to steer for Hand Islet on the recommended track (250°) until reaching the position to alter course to 195° to pass down the middle of Warwick Channel. It is recommended to remain on this course until reaching the patch South of Connexion Island.

If vessels enter via the Connexion passage, care must be taken to avoid the 3 fathom patch off N.W. Bluff and keep clear of the 27-ft. patch about 3.5 miles N.E. of Connexion Islet.

ANCHORAGE: Good holding ground is found 1 mile West of the jetty where there is a good sand bottom free of obstructions with about 40 ft. of water. Quarantine is granted at this anchorage.

MAX. SIZE: The max. LOA is 700 ft. max. breadth 96 ft. The max. draft is 35 ft.

RADIO: The Port is able to communicate with vessels which are fitted with VHF radio through normal international Maritime Channels and the call sign is "Groote Eylandt". However, the shore station is only open during office hours unless prior telegraphic arrangement is made. Office hours are 0800 to 1645 hrs. Monday to Friday and 0800 to 1230 hrs. Saturday.

It is requested that vessels arriving at any hour of the day should monitor VHF Channel 16 as sometimes attempts are made to contact vessels outside of office hours.

ETA's are required at least 72 hrs. 48 hrs. and 24 hrs. prior to arrival. Telegraphic address is: Manager, GEMCO, C/-Hematite, Darwin. Telex AA70858. Or Manager, GEMCO, Alyangula, N.T. 5798. Radio telephone: Darwin 81-6589, or Cairns 3547.

PRATIQUE: Vessels are granted Pratique at the Anchorage one mile West of the wharf. The ship's gangway must be lowered for the boarding of the Quarantine Doctor. When the Quarantine Doctor is aboard the ship's entire crew must be mustered for inspection and the taking of Anti Malarial tablets.

BERTHING: The ore-loading jetty is situated in approximately 13° 56.5′ S. 136° 25′ E., with a depth of water alongside of 35 ft. MLWOST with a tide range of 6 ft. A small tug is available to assist in berthing vessels and a launch is provided for running lines. The jetty consists of a central landing 324 ft. long and 36 ft. wide, with two breasting dolphins on the North and South ends of the central landing. A roadway extends from the shore to the central landing, virtually parallel to and on the North side of the loading conveyor belt. As there is no tidal information for this area, the tidal direction should be checked with the shore prior to berthing, as the tidal stream is sometimes different half a mile from the jetty.

The line of dolphins is offset 8° from the jetty stem which runs out 1,350 ft. from the shore in a 249° 45′ direction so that care must be exercised in placing the vessel for loading. All breasting dolphins are fendered with vertical timbering. When berthing, vessels should keep well clear of the loading head in the centre of the jetty, as it is possible that a vessel on a too fine approach could cause damage to the loading boom with the flare of the bow.

Vessel must have rat guards in position at all times (except while shifting ship), otherwise they will be liable to a fine. As Groote Eylandt is a reserve this requirement is rigidly enforced.

Loading rate is 900-1,100 tons t.p.h. and the vessel is required to shift ship to load each hatch as the loading boom is fixed. Shore labour is available to shift lines, etc., as required. Shore labour will not trim manganese ore, which is dump loaded from the conveyor.

This is a seasonal tropical loading zone from 1st April to 30th November.

FRESH WATER: Not available.

STORES: Not available.

FUEL: Not available.

CUSTOMS ALLOWANCES: 200 cigarettes, one bottle spirits, three bottles of beer per man.

MEDICAL: There is a Medical Centre and medical staff available if necessary. Valid vaccination certificates are required, covering the requirements of the Australian Government Department of Health.

FIRE PRECAUTION: A permanent fire-fighting facility is installed on the ore-loading jetty. It is an automatic system which starts as soon as a fire hydrant is turned on, and delivers a 140 p.s.i. through a 2.5 in. hydrant with a 5 TPI V Thread connection.

All shore hoses are 2.5 in. and are equipped with fog nozzles. Foam equipment is also available on the jetty with an output of approximately 1,000 gallons per minute. Fire-fighting lines on the jetty deliver salt water only. International shore connection available.

TIME: Time kept is Northern Territory "Standard Time" GMT plus 9 hr. 30 min.

WEATHER/WIND/TIDE: Tides cause some eddying in both the Connexion and Warwick Channels, but these cause no concern provided normal care is exercised.

Prevailing winds from May to October are S.E. and blow strongly at times during the day but ease off considerably after sunset.

There are occasional heavy fogs in the area in June and July in the early morning and these sometimes persist until 1000 or 1100 hrs.

From November to May the wet season prevails with winds blowing mainly from the N.W. with heavy rains and occasionally, more than moderate seas.

REPATRIATION: Can be effected to most countries from Groote Eylandt via Darwin which is serviced by Qantas and British Airways. Due to the remoteness of Groote Eylandt, repatriation of crew members should only be considered in a 'Force Majeure' circumstance. All necessary bookings and reservations are made through the local airline office and Seamens' Discount Fares, where applicable, are utilised.

AIRPORT: MacRobertson Miller Airways operate a twice weekly jet service to and from Darwin. Bush Pilots Airways operate a thrice weekly DC3 service to and from Cairns.

ACCOMMODATION: Visitors accommodation in the GEMCO township of Alyangula, is severely limited and shipowners who are arranging for a change of personnel at Groote Eylandt are requested to ensure that the arrival of crew members at Groote coincides as closely as possible with the arrival of the vessel.

NOTARY PUBLIC: A Notary Public is available.

HOLIDAYS: Cargo worked on most holidays by arrangement.

SHORE LEAVE: The area is an Aboriginal reserve and *shore leave is allowed in the town area only* provided the vessel has a permit which is supplied by the Agent on berthing.

AUTHORITY/AGENT: The Groote Eylandt Mining Company Pty. Ltd. act as ships' Agents in all cases.

Mail for steamers to be addressed to: "Vessel", Groote Eylandt Mining Co. Pty. Ltd., Groote Eylandt, N.T. 5798.

HAY POINT, Queensland: 21.16 S. 149.19 E.

(See Plan Book)

LOCATION: Hay Point lies 19 km. South of Mackay in Lat. 21° 16′ S. Long. 149° 19′ E. The port is managed by Hay Point Services Pty. Limited. The loading wharf is at the end of a pier, 6,750 ft. long, extending from the shore.

DOCUMENTS, and all general information refer to "Melbourne".

PILOTAGE: Pilotage is compulsory on all vessels except in the cases where the Master holds an exemption certificate for the port.

The area for boarding will be determined by the Pilot but will generally be at a point within an area 1.5 miles East of the port.

ANCHORAGE: Off Hay Point anchor 2 miles East of berths in 13.7 m.

Off Mackay Harbour anchor 1.5 miles S.E. of Slade Island in depths of 11.0 m.

Vessels berth on the slack current approximately 1 to 1.25 hours prior to the high or low tide times.

MAX. SIZE: Max. length 950 ft. (not including bulbous bow). Max. draft dependent on tide height. A 5 ft. (1.6 m.) under keel clearance is recommended in the berth, which has a depth of 55 ft. (16.7 m.). Under keel clearance required at departure is 10% of max. draft, plus 2 ft. (0.6 m.). Least water on departure is 44 ft. (13.4 m.).

PRATIQUE: Pratique is available on a 24 hour basis, 7 days per week in the berth.

Pratique can also be given by radio to vessels which have a Medical Officer aboard as a Crew member. The radio message must contain details of the ship and personnel and making formal request for radio pratique.

Whilst in the vicinity of the port, vessels are required to store garbage aboard in containers approved by the Quarantine Inspector.

RADIO: *Arrival Advice:* Vessels shall communicate with the Terminal via the Shipping Agents.

It is required that the Master of an incoming vessel notify by radio of the ETA at the port, 7 days, 48 hours and 24 hours prior to expected arrival. Local time should be used in all communications. The loading plan should be provided 48 hours prior to expected arrival time.

The Postmaster-General's Dept. has a facility, known as "Shipserv" which will expedite the handling of ship's radio-telegrams requiring special treatment after normal Post Office hours. This facility has been introduced to obviate likely delays affecting business communications between vessels and their Port Agents.

To ensure that shipping messages will continue to receive "after hours" service, the sender should include the service routing indicator "Shipserv" as the first word in the address of all telegrams requiring special treatment. Action will then be taken to telephone the message to the addressee, who will be required to pay the relevant trunk call charge only.

VHF: There are VHF Marine Radios installed at the Berths, and on the tugs and lineboats, for communications during berthing and unberthing operations.

The call sign for the port is – "Hay Point"
The following Channels are available:
Channel 12 – 156.60 mHz – Operations.
Channel 13 – 156.65 mHz – Operations.
Channel 14 – 156.70 mHz – Operations.
Channel 16 – 156.80 mHz – Calling.

TUGS: The port is serviced by tugs and lineboats owned and operated by J. Fenwick and Co. Pty. Ltd. – Sydney. It is required that the Master of a vessel entering or departing from the Terminal engage the services of the port tugs through the Shipping Agents.

BERTHING: *Berth No. 1:*
(*Note:* All levels refer to chart datum.)

Berth Alignment	350° True
Design ship size	14,500 to 100,000 d.w.t.
Dredged depth	−55 ft. (−16.76 m.)
Dredged width	200 ft. (60.96 m.)
Dredged length	1,125 ft. (342.90 m.)
Depth outside dredged area	−43 ft. (−13.11 m.)
HHWS	+23 ft. (+7.01 m.)
MHWS	+18 ft. (+5.49 m.)
MLWS	+2 ft. (+0.61 m.)

Shiploader

Nominal loading rate	4,000 t.p.h.
Longitudinal travel distance	620 ft. (188.98 m.)
Longitudinal travel speed	100 ft.p.m. (30.48 m.p.m.)
Maximum outreach of telechute	87 ft. (26.52 m.) from fender face

Shiploader has pivoted boom.

Mooring Details: (See Plan Book)
(a) *Mooring Dolphins*
1MD1 – 4×100T sliphooks with capstan
1MD2 – 3×100T sliphooks with capstan
1MD3 – 3×100T sliphooks with capstan
1MD4 – 3×100T sliphooks with capstan
(b) *Breasting Dolphins*
1BD1 – 2×100T sliphooks with capstan
1BD2 to 5 – 1×150T sliphooks with capstan
1BD6 – 2×100T sliphooks with capstan

S.A.M.I. (Speed of Approach Measuring Instrument)
The Berth is fitted with instruments to measure the speed of approach of vessels as an aid to berthing.

Berth No. 2:
(*Note:* All levels refer to chart datum.)
Berth Details:

Berth Alignment	330° True
Design ship size	25,000 to 100,000 d.w.t.
Dredged depth	−56 ft. (−17.07 m.)
Dredged width	200 ft. (60.96 m.)
Dredged length	1,200 ft. (365.76 m.)
Depth outside dredged area	−43 ft. (−13.11 m.)
HHWS	+23 ft. (+7.01 m.)
MHWS	+18 ft. (+5.49 m.)
MLWS	+2 ft. (+0.61 m.)

Shiploader

Nominal loading rate	6,000 t.p.h.
Maximum longitudinal travel distance	628 ft. (191.41 m.)
Normal longitudinal travel distance (between limit switches)	595 ft. (181.36 m.)
Telechute travel height	60 ft. (18.29 m.)
Maximum outreach of telechute	95 ft. (28.96 m.) from fender face
Intermediate outreach of inner shuttle	12 ft. (3.66 m.) inside fender face
Outreach of telechute corresponding with intermediate position of inner shuttle	70 ft. (21.34 m.) from fender face.
Elevation of telechute fully extended	+18.5 ft. (+5.64 m.)

Mooring Details (See Plan Book)
(a) *Mooring Dolphins*
2MD1 – 4×100T sliphooks with capstan
2MD2 – 3×100T sliphooks with capstan
2MD3 – 3×100T sliphooks with capstan
2MD4 – 3×100T sliphooks with capstan
(b) *Breasting Dolphins*
2BD1 – 3×100T sliphooks
2BD2 to 5 – 1×100T sliphooks on each
2BD6 – 2×100T sliphooks

S.A.M.I. (Speed of Approach Measuring Instrument).
The berth is also fitted with instruments to measure the speed of approach of vessels as an aid to berthing.

LOADING: Vessels will be generally loaded in turn, in the order of arrival provided that:
(i) The vessel is ready in all respects to receive cargo.
(ii) All the cargo is available at the Terminal.
(iii) It is in accordance with the instructions of the Charterer or his Agent.

Vessel shall present a detailed loading plan immediately on arrival including hatch quantities with loading sequence and quantity of coal to be reserved for fore and aft trimming by hatches.

The weight of each shipment shall be determined by an independent Marine Surveyor. The time used for all surveys shall be to the vessel's account unless alternative arrangements have been made.

BULK HANDLING FACILITIES: The Shiploader on Berth No. 1 has a Luffing Boom with a travelling telescopic chute and mechanical trimmer. The Shiploader has a nominal loading rate of 4,000 t.p.h. On Berth No. 2 the Shiploader has rail mounted shuttles, both Inner Shuttle and Outer Shuttle. The Telescopic chute with Trimmer is mounted on the Outer Shuttle with a nominal fast rate of 6,000 t.p.h. and a trimming rate of 2,000 t.p.h.

STEVEDORES: No notice required. Loading facilities working three shifts of 8 hours each.

MEDICAL: Hospital and doctors at Mackay, 23 miles away by road.

DENSITY: 1025.

FRESH WATER: Not available.

FUEL: No facilities are available for providing bunker or diesel fuel. It is strictly forbidden for drums of oil or fuel to be loaded at the Terminal.

IDENTIFICATION CARDS: See "Melbourne".

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Crew operate hatches.

CONSULS: No local representatives.

REPAIRS: Only light repairs may be effected.

REPATRIATION: Can be arranged.

AIRPORT: Regular services to Northern and Southern ports are available from Mackay Airport.

TIME: GMT plus 10 hours (Eastern Australian Standard Time).

POLICE/FIRE/AMBULANCE: Police, Mackay 2468; Ambulance, Mackay 2222; Fire, Mackay 2244; Police Sarina 20; Ambulance, Sarina 1; Fire, Sarina 100.

TELEPHONES: Placed on board whilst alongside. Hay Point 56–31–52, at berth No. 1 and Hay Point 56–31–06 at berth No. 2.

DELAYS: Berth is exposed and delays occur when wind speeds exceed 25 knots.

SHORE LEAVE: Allowed, taxis may be called from Mackay but are expensive, about A$9 each way. Crew members not allowed along pier on foot.

POLLUTION: Government Authorities demand that no person using the port shall discharge any garbage, refuse, vegetable or food matter, deck cleanings, polluted bilge water, oil or rubbish of any description in the vicinity of the port or within 50 miles of the Great Barrier Reef. Heavy penalties will be imposed for breaches of the relevant regulations.

It is a requirement of the Dept. of Harbours and Marine that before the Pilot may proceed with the berthing of a ship likely to deballast at the Port, the Pilot must receive a certificate from the Master stating that the ballast on board is clean.

STORES: Nautilus Trading Co. Pty. Ltd. are able to supply all vessels, with all types of provisions, bond stores, deck and engine stores, from their warehouses and freezers, situated at Hay Point and Mackay.

GENERAL: *Firearms, Explosives, Inflammables:* No person shall discharge any firearm or explode any detonator or any other signal except as a distress signal, or use any explosive upon any vessel or otherwise within the Terminal.

Explosives or highly inflammable goods shall not be loaded or unloaded at the port except with the expressed written permission of the Port Manager.

Repairs in Port: The Owner, Master or Agent shall notify and obtain written approval from the Port Manager prior to undertaking any repairs to engines or any part of the mechanism of the vessel which would prevent sailing at short notice. The vessel shall not be immobilised at the wharf.

Tides and Currents: In the absence of formal tide tables for the port of Hay Point, it is recommended by the Dept. of Harbours and Marine that the tidal predictions for Mackay should also suffice. From the Department's records, it appears that the time difference of high and low water is only of the order of 5 to 10 minutes after Mackay.

From studies carried out in the Hay Point area by hydrographic investigators there is an indication that the tidal currents flood in a direction between 145° to 170° True and the ebb current flows in a direction of 330° to 360°, with a maximum speed (in knots) approximating one-tenth of the predicted tidal range (in feet) at that time. A maximum current speed occurs in a direction of 340° True with an ebbing tide. The change of direction in the current occurs about half an hour before the tidal extremes.

AUTHORITY: Owned and operated by Hay Point Services Pty. Ltd. Pilotage by Department of Harbours and Marine.

AGENT: Sub-agent of Patrick Agencies, Brisbane.

HOBART, Tasmania (including Risdon, Electrona and Port Huon): 42.53 S. 147.20 E. (See Plan Book)

PORT LIMITS: Seaward boundaries (Hobart, Risdon, Electrona and Port Huon for vessels bound from the East); the mouth of the River Derwent, an imaginary line from Iron Pot to Kelly Pt. On Bruny Is. (Port Huon, Electrona for vessels bound from the West); the Southern end of the D'Entrecasteaux Channel, an imaginary line from the Southern end of Partridge Is. to Southport Is. Vessels are considered "arrived" after clearing doctor and a notice of readiness presented to Agent.

DOCUMENTS: See "Melbourne".

PILOTAGE: Pilotage compulsory for all vessels exceeding 200 tons gross not under the command of a duly exempted Master or without special permission of Harbour Master. ETA usually sent vessel's Agent at least 24 hours prior to arrival Pilot (advisable also to send ETA to Harbour Master) through Hobart Radio (VIH) between 0730–1730 hrs. Monday–Saturday, 0800–1600 hrs. Sunday, after hours through Melbourne Radio (VIM). Continuous watch kept on VHF Channel 16, call sign "Hobart Harbour" (Pilot launches also maintain watch on Channel 16); Channel 12 reserved ship to shore; Channel 8 and 6 ship to ship.

Three launches used for pilotage work. Usual vessel 41 ft. steel-built launch painted dark blue with "Pilot" painted in white on hull on both sides. Superstructure painted white. No specific sound signals. For pilotage purposes Hobart is divided into three zones namely "A" (Hobart), "B" (Risdon, Self's Pt.), and "C" (Port Huon, Electrona and Channel Ports). For zones "A" and "B" Pilot boards all vessels in excess of 500 tons gross, on an imaginary line joining White Rock and Crayfish Pt. Vessels under 500 tons gross are boarded on a line East from John Garrow Beacon. Pilots disembark from all vessels outward on a line East from John Garrow Beacon unless requested to proceed to White Rock. For zone "C", for vessels from Eastwards, Pilots embark on an imaginary line joining Piersons Pt. and Kelly Pt., or from Westwards on an imaginary line joining Southern end of Partridge Is. and Southport Is. No alternative Pilot grounds. Vessels inward to zones "A" and "B" wishing to anchor prior to embarking Pilot should do so off White Rock, whether to proceed to berth or quarantine anchorage.

Specific requirements for embarking Pilots are those in force in most ports, namely provide a good lee, a pilot ladder fitted with spreaders and manropes and adequately lit at night, preferably from aft of the ladder.

Also see "Bridges".

ANCHORAGES: Anchorages with excellent holding can be found everywhere in estuaries of Derwent and Huon Rivers. Quarantine anchorage situated off Kangaroo Bluff where excellent holding obtained in 10 to 13 fathoms.

RESTRICTIONS: No restrictions in force, except very deep draft at night at Risdon.

MAX. SIZE: Risdon to 35 ft.; Self's Pt. Oil Wharf, Macquarie No. 2 and No. 3 General Cargo Wharf dredged to 36 ft. (10.97 m.). Macquarie No. 4, max. draft 42 ft. (12.8 m.). Max. beam practicable at Risdon 24.384 m. (80 ft.).

HEALTH: Vessels requiring pratique anchor in quarantine anchorage and there boarded by doctor, immigration and customs officials. Full crew muster required. Quarantine authorities must be informed of suspected disease or fever at least 18 hours prior arrival. Pratique automatic if granted at previous Australian port. Also see "Melbourne".

RADIO: Hobart Radio, call sign VIH. Hours of duty Eastern Standard Time (add 1 hour for Summer Time) Monday to Saturday inc. 0730–1730 hrs., Sunday 0800–1600 hrs. After hours messages through Melbourne Radio VIM.

TUGS: Normally join vessels approximately one mile from berth. Usual to use tug's line for which additional charge of $2.50 is made, but ship's line may be used.

BERTHING: Port operates on a 24-hour per day basis. No restrictions on tanker movement.

Berths available Hobart, Risdon, to 35 ft. (10.67 m.)
Berths available Self's Pt. (Oil) to 36 ft. (10.97 m.)
Berth available Channel Ports
(General) Port Huon 2, to 32 ft. (9.75 m.)
Explosives Jetty to 30 ft. (9.14 m.)

SPECIALISED CARGO-HANDLING FACILITIES: Bulk wheat is discharged at Princes Wharf. Liquid caustic soda and feedstock for the gas company are discharged at Macquarie Wharf No. 2. Risdon Wharf, owned by the Electrolytic Zinc Company of Australasia Ltd., handles bulk cargo consisting of phosphate rock, zinc concentrates and potash. The wharf also has facilities for loading bulk sulphuric acid. Australian Paper Manufacturers Pty Ltd. own a wharf at Hospital Bay, Port Huon, which is used for loading wood pulp in bulk. Roll-on/roll-off traffic accommodated at Princes Wharf No. 1, and at Princes Wharf No. 4, which is also equipped with a 22-ton crane for handling containers.

Roll-on/roll-off facilities at new berths Macquarie No. 5 and No. 6 now available. Live load of ramps 210 tonnes. Ramp beam 10.97 m.

The port is equipped with a Coles "Colossus" 254 tonne capacity fully mobile crane. This high capacity crane is used both for heavy lift requirements and container handling. For container work 30 tonnes can be handled at 33 m. outreach.

BRIDGES: Only one bridge, the Tasman Bridge, required to be navigated and this only when berthing at Self's Pt. Oil Wharf or the Electrolytic Zinc Company's Wharf at Risdon. Clearance 155 ft. (47.24 m.) at HWS and 240 ft. (73.14 m.) wide. Pilotage under bridge is compulsory for all vessels of length 100 m. and over.

STEVEDORES: Gangs ordered by 1600 hrs. on previous day, or 1400 hrs. on Fridays.

MEDICAL: Advance notice of required medical attention necessary including if possible, symptoms of complaint. As much notice as reasonably possible is required. Vaccination for smallpox compulsory. Inoculation against yellow fever or cholera necessary if vessel has visited a port where either disease proclaimed.

TANKERS: Tankers when sending their ETA must state whether or not there are any leaks in hull. All oil discharge lines 8 in. diameter. One oil berth, max. draft alongside 36 ft. (10.97 m.).

Self's Pt. Oil Wharf is used for discharge of bulk petroleum products and has facilities for the discharge of liquid petroleum gas.

DENSITY: Variable.

FRESH WATER: No restriction on availability. Rate of delivery approximately 30 t.p.h./per hose. Water available all berths. No water boats. Cost per 1,000 gallons 45 cents or part thereof.

FUEL: The following grades of fuel are kept in stock: marine fuel oil, light diesel and gas oil. Twenty-four hours notice required for bunkering.

FIRE PRECAUTIONS: No special fire precautions other than non-smoking or lighting of fires or use of naked lights.

DRY DOCK (SLIP):

Dimensions of cradle		180 ft. (54.86 m.)
Clear width		40 ft. (12.2 m.)
Minimum depth over blocks when slipping	F	5.6 ft. (1.71 m.)
	A	13.1 ft. (3.99 m.)
Range of tide		4.7 ft. (1.43 m.)

Available for vessels up to 1,200 tons displacement.

SURVEYORS: Agents and Surveyors for Lloyds Register of Shipping, American Bureau of Shipping, Bureau Veritas: Mr. R. B. Thompson, Mr. W. F. Wells, 5 Gladstone St., Hobart. Tel 237328. Also appointed Surveyors for Norske Veritas.

GANGWAY/DECK WATCHMAN: Gangway watchmen are recommended. Watchmen work 12-hour shift. On Saturday, Sundays and holidays, twice normal rate.

OPENING/CLOSING HATCHES: Normally by stevedores.

CERTIFICATES: Register, Load-line Certificate, Deratisation Certificate, Light Dues, Articles of Agreement, Clearance from previous port.

CUSTOMS ALLOWANCES: If vessel arrives at first port, allowance of tobacco for crew is 200 cigarettes in opened carton or equivalent in tobacco or cigars. Allowance of wines or spirits is any opened bottle, but not exceeding 26 fluid ounces.

CARGO GEAR: No additional requirements. See "Melbourne".

IDENTIFICATION CARDS: See "Melbourne".

CONSULS:

Belgium
China (Republic)
France
Greece
Italy
Netherlands
Norway
Denmark
Sweden
Germany

REPAIRS: No facilities for major repairs, but a number of engineering works which can perform small repairs.

REPATRIATION: Facilities available.

AIRPORT: Situated 11 miles from Hobart, and is served by regular airlines connecting with Melbourne from where services operate world wide.

TIME: Local time (Eastern Standard Time) 10 hours ahead of GMT. Summer time in force from last week-end in October to first week-end in March, when clocks advanced one hour.

HOLIDAYS: Official Holidays observed in Hobart. New Year's Day; Australia Day (late January); Regatta Day (mid February); *Labour Day (early March); *Good Friday; Easter Saturday; Easter Sunday; Easter Monday; Easter Tuesday (Bank holiday); *Anzac Day (April 25th); Queen's Birthday (mid June); Show Day (third Thursday in October); *Christmas Day; Boxing Day.

*Days on which no work is performed.

POLICE/AMBULANCE/FIRE: Police 38 1101; Ambulance 343131; Fire 345655. In emergency dial "000".

TELEPHONES: Arrangements exist for placing telephones aboard vessels at all berths.

DELAYS: Not usual for any delays to occur in berthing. Occasionally a deep-loaded bulk carrier has to wait for high water at Risdon.

AUTHORITY: Marine Board of Hobart.

AGENT: Sub-agent of Patrick Agencies, Melbourne.

INNISFAIL/MOURILYAN, Queensland:
17. 32 S. 146.02 E. **(See Plan Book)**

PORT LIMITS: Mourilyan Harbour, the area to the West of a line joining Hall Point and the outer extremity of the North Head.

ARRIVAL: Requirement for vessels in ballast; min. forward draft to be 2 per cent of overall length, min. after draft – propellor immersed. Draft to be notified to Agent in arrival telegram.

CERTIFICATES/DOCUMENTS/CUSTOMS ALLOWANCES: See "Melbourne".

PILOTAGE: Order Pilot through Agent, as early as possible. Confirm through Agent or direct to Harbour Master, Innisfail. Pilot vessel, located in Mourilyan Harbour, watches on VHF 16 when vessel expected to berth. Pilot vessel white with yellow cabin tops and blue trim. Pilot boards 1.5–3 miles East of harbour entrance. Approved pilot ladder and good lee required, *not* accommodation ladder. Vessels awaiting Pilot anchor in boarding position above, good holding. Leading beacons – in line 270° T, showing fixed red neon. Entrance beacons flashing – red port, green starboard.

RESTRICTIONS: No night-time arrival pilotage. On spring tides, entry restricted to at or near slack water. No turbine-powered vessels accepted. Berthing daylight only. Night-time sailings permitted. Vessels entering or leaving – Forward draft not to be less than 2% of overall length and propellor to be immersed.

MAX. SIZE: 600 ft. LOA. Beam unrestricted.

Draft Arrival: Limited by swing basin, maximum depth 7.1 m. less 0.6 m. keel clearance, all vessels swing and berth port side to main wharf.

Draft Departure: Limited by entrance depth of 8.53 m. less 0.93 m. keel clearance.

HEALTH: See "Pilotage". Also see "Melbourne".

RADIO: VIT Townsville (MF) VIK Cairns, has been discontinued.
TUGS: Tug stationed at Mourilyan. Second tug comes from Cairns or Townsville when required, e.g. when vessel over 580 ft. LOA or beam over 75 ft. Tug usually required for unberthing. Tug normally pushing or using tug's lines, no extra charge.
BERTHING: Ships always berth port side to at Mourilyan. One sugar and molasses berth, length 633 ft. depth 10.0 m. LWOST.
STEVEDORES: No waterside workers employed. Normal ETA advices to Agents for arrangement of bulk-loading staff.
DENSITY: Usually 1024-1027 irrespective of tide. After heavy rains, particularly January-April, considerable freshening occurs to 1008.
FRESH WATER: Good water readily available, shore hoses from wharf face. Approx. 25 t.p.h. capacity. 15c. per 1,000 gals.
FUEL: Limited quantities of fuel oil and diesel oil available by road-tanker.
GANGWAY WATCHMEN: Not normally required.
HATCHES: Worked by crew.
CARGO GEAR: See "Melbourne".
CREW I.D. CARDS: See "Melbourne".
CONSULS: Nil.
REPAIRS: No major facilities available. Most types of welding, light machinery, and pipe-fitting can be arranged. Technicians can usually be obtained for radar, etc., with advance notice by radio to Agents.
TIME: GMT plus 10 hours.
HOLIDAYS: Various national, state and local holidays. Cargo usually worked on all holidays except Christmas Day.
POLICE/FIRE/AMBULANCE: Ring 000 on shore public telephone or ship's telephone if fitted.
TELEPHONE: No telephone aboard.
GENERAL: Port normally used only for export of sugar and molasses. Deadweight (cargo on board on arrival) restrictions may apply to certain classes of vessel. Agents will advise details if applicable.
SHORE LEAVE: Not normally restricted. Distance to nearest township (Mourilyan) 6 miles, to Innisfail 10 miles. No public transport services from harbour.
DELAYS: Awaiting daylight or tide or, exceptionally, awaiting vacancy of berth or moderation of weather. No delays usually in loading.
AUTHORITY: Dept. Harbours and Marine.
AGENTS: Sub-agent of Patrick Agencies, Brisbane.

LAUNCESTON, Tasmania (including Beauty Point, Bell Bay, Inspection Head): 41.27 S. 147.07 E.

(See Plan Book)

PORT LIMITS: A vessel is considered to have arrived when at the Pilot boarding ground.
DOCUMENTS: Agents prepare Bills of Lading and Shipping Documents. Only documents required Crew List and Passenger List. Light Dues receipt is necessary if payment is made before arrival.
PILOTAGE: Compulsory for vessels over 50 tons d.w.t. Pilot boards off Low Head lighthouse, slightly to East of leads in line.

Contact Pilot by radio giving ETA 24 hours before arrival. Telegraphic address "Portlaun". Pilots equipped with VHF Channels 16 and 12. "G" Flag to be flown on arrival.

Instructions for boarding given by Pilot over radio-telephone.
ANCHORAGE:
Position *(a)* Low Head 41° 03′ 32″ S., 146° 47′ 18″ E.
(b) 1.15 miles 280° from *(a)*
(c) 0.9 miles 308° from *(b)*
(d) 0.85 miles 038° from *(c)*
(e) 0.9 miles 128° from *(d)*
thence 0.85 miles 218° to *(b)*
RESTRICTIONS: Night navigation undertaken (tankers now operate at night). Over 168 m. at Pilot's discretion.
MAX. SIZE: Max. permissible draft 9.0 m. at zero water. 11.10 m. at high water. Length restricted to approx. 229 m. Vessels over 168 m. length cannot work Channel during ebb tide. Under keel clearance to be 1.3 m.
HEALTH: Organised by ship's Agent. Notify Agent prior to arrival. Pratique automatic if vessel visits other ports in Australia prior calling Launceston. Also see "Melbourne".
RADIO: Melbourne VIM or Hobart VIH.
TUGS: Three tugs – one of 2,000 h.p., available at Launceston. Tugs normally join at Point Effingham.
VHF: Pilot station, pilot launch, and the two Launceston tugs are fitted with VHF Channels 6, 12 and 16 operating on frequencies 156.6 and 156.8 respectively.
BERTHING:
Bell Bay: On the Eastern shore within 11 km. of the entrance.

No. 3 Berth: Length 152 m. Depth alongside 11.29 m. at LWST. The wharf is able to handle loads of 140 tonnes on suitable transporters. General and bulk cargoes handled. Quay equipped with a 12.5-tonne grab able to handle 450 t.p.h.

No. 1 Berth: Length 152 m. Depth alongside 10.97 m. at LWST. Quay equipped with two 12.5-ton grabbing cranes, each with a rated capacity of 300 t.p.h.

No. 2 Berth: A specially designed terminal for the Bass Strait and Sydney vehicular deck ships equipped with stern loading facilities, capable of carrying wheeled and mobile cargo in excess of 120 tons gross weight. Also a 25-ton capacity wharf crane for handling containers and unit loads. Depth alongside 8.23 m. at LW.

No. 4 Tanker Berth: 30.5 m. by 9 m. with separate fender dolphins 61 m. apart and mooring dolphins 262 m. apart. Depth alongside 11.28 m. at LWST.

No. 5 Common User Berth: Length 174 m., depth alongside 12.19 m. to 9.14 m. at LW. The berth is designed for container, Ro/Ro, conventional and bulk cargoes. The berth is equipped with a 50-ton travelling crane, and a 8.2 m. wide stern loading ramp with a capacity in excess of 180 tonnes.

Long Reach: On the Eastern shore within 16 km. of the entrance.

Thermal Station Berth: Length 30.5 m., fender dolphins 61 m. apart. Depth alongside 12.34 m. at LW.

No. 1 Chip Berth (Northern): Length 229 m., depth alongside 11.58 m. at LW. Operators, North Woodchips Pty Ltd. The berthing face consists of 5-fender dolphins and 4 mooring dolphins.

No. 2 Chip Berth (Southern): Length 229 m., depth alongside 11.28 m. at LW. Operators, Associated Pulp and Paper Mills Ltd. The berthing face is the same as No. 1 berth.

Inspection Head and Beauty Point: On the Western shore within 11 km. of the entrance.

Inspection Head Wharf: Length 335 m., depth alongside 10.06 m. at LW. The wharf provides two overseas berths with 3,675 sq. m. of shed space, including cool storage and low temperature storage of 966 sq. m., capacity 1,200 tons.

Bulk tallow storage of 1,400 tons and 200 t.p.h. loading rate. Swing room of 198 m. available off the berth.

Beauty Point Wharf: Length 154 m., depth alongside 9.91 m. at LW. Withdrawn from regular service and used only as a plant berth.

Hillwood: On the Eastern shore 32 km. from the entrance.

Explosives Jetty: Length 18 m. × 24 m., depth alongside 4.27 m. at LW.

Launceston:

King's Wharf: Total berthing length 293 m., depth alongside 5 m. at LW. There is provision for the discharge of bulk wheat. 17.5-ton cargo handling crane is available.
BRIDGES: No bridges for large overseas shipping. Some inter-state vessels proceeding to Launceston will pass under Batman Bridge – 27 m. mast clearance HW allows 0.91 m. clearance.
STEVEDORES: Agent for ship arranges stevedores. No ETA required.
MEDICAL: Agents should be notified to prepare for medical attention or hospitalisation. Hospitals at Launceston, Beaconsfield, and George Town.
TANKERS: One oil berth at Bell Bay suitable for tankers up to 189 m. length. Vessel berths alongside loading platform and dolphins. Length between mooring dolphins 262 m. Depth alongside berth 11.28 m. LW.

Also one private tanker berth (HEC) with depth 12.0 m., alongside.
BULK HANDLING FACILITIES: One 450 t.p.h. bulk handling crane at Bell Bay Wharf. Two 300 t.p.h. bulk handling cranes at Comalco Private wharf. One 25 ton luffing crane at Ro/Ro Berth.
DENSITY: 1025 to 1028.
FRESH WATER: Fresh water available at all berths. Delivery 30 t.p.h. by hose. Cost 25c to 40c 1,000 gallons plus $4 service charge.
FUEL: Bunkers are available from Mobil and B.P. installations at Bell Bay by wharf line at the oil berth or by road tankers at other berths.
GANGWAY/DECK WATCHMEN. Most vessels supply their own. May be supplied if required. Tidal port makes this requirement necessary.
OPENING/CLOSING HATCHES: Usually by Stevedores.
CUSTOMS ALLOWANCES: Allowance 40 cigarettes per day per man. Stores sealed on arrival; allowance per day per man 2 bottles beer, 1 wine; spirits 1 bottle per 10 days.
CARGO GEAR: Certificates of loading gear and derrick tests to be produced. Also see "Melbourne".
IDENTIFICATION CARDS: See "Melbourne".
CONSULS: Nil.
REPAIRS: All repairs possible.
DRY DOCKS: Steel and concrete graving dock located Launceston. Will accommodate ships up to 62.5 m. length and 3.66 m. draft. Clear width of entrance 12.80 m.
REPATRIATION: Arranged through ship's Agents.
AIRPORT: Approx. 64 km. to airport, regular services.
TIME: EST; clocks advanced by 1 hour October-March.
HOLIDAYS: Good Friday, Christmas Day and New Year's Day close holidays. Work on other holidays may be arranged through Agents.
POLICE/AMBULANCE/FIRE: Beauty Point and Inspection Head 83 1141; 83 1204; 83 1109 (fire calls only), Bell Bay 82 1566; 82 1680; 82 1717 (fire calls only).
TELEPHONES: Ship-to-shore phones available.
AUTHORITY: Port of Launceston Authority.
AGENT: Sub-agent of Patrick Agencies, Melbourne.

MACKAY, Queensland: 21.06 S. 149.14 E. (See Plan Book)

CERTIFICATES/DOCUMENTS/CUSTOMS ALLOWANCES: See "Melbourne".
PORT LIMITS: As for anchorage.
PILOTAGE: Compulsory, service obtained by radio to Agents at least 24 hours before ETA. Pilots will board either at the anchorage (E.S.E. of the Harbour) or 1 mile South of Slade Island heading North. To allow time for manoeuvring, vessels should be under weigh at the Pilot boarding time. Masters are advised not to manoeuvre West of a line between Slade Island and Flat Top Island.
ANCHORAGES: To South of the line of sea leads, with Slade Island summit bearing 351° (343° Mag.), and green light on Southern side of breakwater entrance bearing 294° (286° Mag.), good anchorage with not less than 30 ft. (9.1 m.) LWOS. Bottom sand and good holding ground.
RESTRICTIONS: None. Day or night access.
MAX. SIZE: Up to 620 ft. (189 m.). Largest vessels load at bulk sugar berth, max. length governed by length of traverse of loading appliance winch 445 ft. 8 in. (136 m.) between hatches.
HEALTH: See "Melbourne". Inspection at anchorage or at berth.
TUGS: Two tugs available, 1×10 tons and 1×12 tons bollard pull.
RADIO: See "Brisbane". A VHF Port Radio Station has been established at Mackay Harbour. Frequency: Channels 6, 12, 16, call sign "Mackay Harbour". Hours: every hour on the hour and monitoring will commence five minutes before the hour and five minutes after the hour.
BERTHING:

Berth No.	*Length (Metres)*	*Depth (Metres)*
1.	198.12	10.4
2.	198.12	10.1
3.	198.12	10.3
4.	182.88	10.4

Slack water entry. Swinging basin 28 ft. (8.5 m.) LWOST. Mean high neap tide rise 13 ft. 4 in. (4.1 m.). Mean high spring tide rise 18 ft. 1 in. (5.5 m.). Depth at berths 33–35 ft. (10.1-10.4 m.).
SPECIALISED CARGO HANDLING FACILITIES:
Sugar Loading Gantry

(*a*) Loader Height: Clear height of loader in horizontal position from top of the pier, 26 ft. (7.9 m.). Height of pier above low water, 34 ft. (10.4 m.). Can be used in lifting slope "V" position up to 14° above horizontal. Max. vessel's hatch height above sea surface with which vessel may start loading even at high water, 35 ft. (10.7 m.).

(*b*) Outreach: Max. outreach of loader from side of pier, 40 ft. (12.2 m.). Breadth of permanent fender from side of pier, 2 ft. 6 in. (0.8 m.). The chute can be traversed along the boom for a max. distance of 20 ft. (6.1 m.).

(*c*) Movable Range. Length of movable range along pier, 445 ft. 8 in. (135.8 m.).

(*d*) Capacity: Average loading rate 1,400 tonnes per hour.

Container/Unit Load Facilities
Berth: length 600 ft. (183 m.); depth 34 ft. (10.4 m.); width 100 ft. (30.5 m.). Wharf deck: 126 ft.×60 ft. plus 2 ft. 6 in. breadth of permanent fender (38 m.×18 m. plus 0.8 m.); height above low water 28 ft. (8.5 m.) Crane: 25 tons (25.4 tonnes) capacity at 110 ft. (33.5 m.) radius.
STEVEDORES: As much notice as possible.
TANKERS: Berth at Breast Wharf. Load rate for bulk molasses 300 t.p.h. through 18 in. (46 cm.) dockline. 8 in. (20.3 cm.) (Caltex) dockline for white petroleum. 10 in. (25.4 cm) dockline (Mobil) for black petroleum products. 8 in. (20.3 cm.) dockline (CSR) for export of industrial alcohol. 4 in. (10.2 cm.) dockline (gas supply) for import LPG.
DENSITY: Sea water.
FRESH WATER: Available all berths, rate of load 45 tons (45.7 tonnes) per hour.
FUEL: Available at Breast Wharf and North Pier Berth.
FIRE PRECAUTIONS: Normal requirements.
DEVELOPMENTS: 240,000 tonne extension to bulk sugar terminal to total capacity of 669,000 tonnes.
WATCHMEN: Not obligatory.
OPENING/CLOSING HATCHES: Normally by crew, but can be done by stevedores if required.
CARGO GEAR: See "Melbourne".
IDENTIFICATION CARDS: See "Melbourne".
REPAIRS: Small repairs can be carried out. Oxy-welding and electric welding plants, compressors and air tools available. Salvage divers available.
REPATRIATION: Facilities available.
AIRPORT: Daily service to Brisbane and thence to world-wide destinations.
TIME: GMT plus 10 hours.
HOLIDAYS: Bank holidays as for Brisbane, plus Waterside Workers' Picnic Day.
POLICE/AMBULANCE/FIRE: Police 572468, Fire 572244, Ambulance 572222.
TELEPHONES: Ships' extension telephones may be connected at all berths.
SERVICES: Compass adjusting.
AUTHORITY: Mackay Harbour Board.
AGENT: Sub-agent of Patrick Agencies, Brisbane.

MARYBOROUGH, (incl. Urangan) Queensland: 25.18 S. 152.54 E. (See Plan Book)

PORT LIMITS: The area between the mainland and Great Sandy Island from a line joining Hook Point and the Eastern extremity of Inskip Point to the parallel of 25 deg. 7 min. S. latitude, including all rivers, creeks and navigable waters in the above named area.
APPROACHES: Via Hervey Bay and the Pearl Channel.
The width of the Channel to Urangan is 500 ft. (152.4m.) and the Mary River 100 ft. (30.48 m.).
The depths of water at LWOST in this port and approaches are:

	Feet	*Metres*
Urangan Channel	17.0	5.18
Mary River	4.0	1.22
Sandy Straits	3.0	0.91

The swinging basin at Urangan has a width of 1,800 ft. (548.64 m.) and a depth of 27 ft. (8.23 m.).
The swinging basin in the Mary River at Maryborough has a width of 400 ft. (122 m.) and a depth of water of 30 ft. (9.14 m.).
DOCUMENTS: See "Melbourne".
PILOTAGE: Vessels requiring the services of a Pilot should advise the Harbour Master at least 24 hours before their expected time of arrival at the Fairway Buoy and also advise vessels draft.
Note: Pilots for the Sandy Straits are not available on Saturdays, Sundays or holidays unless the vessel is bound for Maryborough.
Pilots Boarding Ground is located off the Fairway Buoy, Hervey Bay and the distance therefrom to Urangan Jetty is 13 miles, and upriver to Maryborough 45 miles.
RESTRICTIONS: Tankers with highly inflammable liquids are not allowed to berth at Urangan in the hours of darkness.
MAX. SIZE: Max. draft of vessels that may enter the port are:
Urangan: HWOST 24 ft. (7.3 m.) and at LWOST 14 ft. (4.27 m.) allowing 3 ft. (1 m.) under keel.
Maryborough: HWOST 12 ft. 6 in. (3.8 m.) allowing 2 ft. (0.6 m.).
HEALTH: Pratique available 24 hours a day, 7 days a week.
TIDES: The mean spring rise is 10 ft. (3.048 m.) at both Urangan and Maryborough, while the mean neap rise is 8 ft. (2.438 m.) at Urangan.
BERTHING: The berths in the port number 2 in all, one (1) at Urangan and one (1) at Maryborough.
The jetty at Urangan is 26 miles by road from Maryborough.
The length of each berth and respective depth of water at LWOST are:
Urangan
(i) 1 Berth 390 ft. (118.87 m.) in length; depth of water 29 ft. (8.84 m.). Max. length of vessel which can be accommodated is 560 ft. (170.69 m.).
Maryborough
(ii) 1 Berth – 120 ft. (36.576 m.) in length; depth of water 20 ft. (6.096 m.); Max. length of vessel which can be accommodated is 150 ft. (45.7 m.) approximately.
Wharf Use
(i) The wharf at Urangan is a dual-purpose berth used as an oil tanker berth and general cargo berth. The oil tanker berth is used by Caltex Oil (Australia) Pty Limited.
(ii) Berth at Maryborough is a mineral sand berth.
Shed Accommodation
(i) Urangan Wharf Shed – 7,000 sq. ft. (650.3 sq. m.) approx.
(ii) Maryborough Wharf Shed – 4,000 sq. ft. (371.6 sq. m.) approx.
Wharf Cranes at Maryborough.
A 40-ton Sheerlegs at 27 ft. 6 in. (8.54 m.) radius at Walkers Shipyard Wharf.
Mobile Equipment
Urangan: Electric capstans are available to move rail trucks.
Maryborough: Mobile cranes are available for hire.
TUGS: Towage is not available at this port. Arrangements for tugs would need to be made in advance to allow steaming time from Bundaberg, the next nearest port.
REPAIRS: Available.
FUEL: Oil bunkering is available at both Urangan and Maryborough.
FRESH WATER: Water is available at the Urangan Jetty and the Maryborough wharves at the rate of $0.75 per 1,000 gallons ($0.17 cents per 1,000 litres) (minimum charge $0.75).
CONSULS: None.
MEDICAL: The Hospital, situated at 185 Walker Street, Maryborough may be contacted on telephone number 21.2222.
POLICE/AMBULANCE/FIRE:
Fire Services
For emergency calls, dial "000" and ask the operator for the Fire Brigade. General enquiries should be directed to telephone number 21.2535. The Brigade Station is situated at 98 Lennox Street, Maryborough.
Police Services
For emergency calls, dial "000" and ask the operator for the Police. General enquiries should be directed to telephone number 21.2211. The Police Station is situated in Lennox Street, Maryborough.
Ambulance Services
For emergency services, dial "000" and ask the operator for the Ambulance. General enquiries should be directed to telephone number 21.2244. The Brigade is situated at 155 Neptune Street, Maryborough.
AUTHORITY: Dept. of Harbours & Marine, Brisbane.
AGENT: See "Brisbane".

MELBOURNE, Victoria (including Coode Island, Holden Oil Dock, Port Melbourne, Williamstown, Yarraville): 37.50 S., 144.58 E. (See Plan Book)

PORT LIMITS: Vessels at anchor off Gellibrand Lighthouse are considered "arrived" for the purposes of priority of berthing.

DOCUMENTS:

	No. of copies required
Form M & S 11 (List of crew)	2
Form 42A (Store List)	1
Form 5 (Articles owned or in possession of Master, Officers or crew)	1
Form C & E 886 (Ports of call)	3
Form QA3 (Declaration of animals carried as cargo)	1
Form QA4 (Declaration of ship's pets)	1
Form QA5 (Shipmaster's Bond to cover ship's pets)	1
Form A Q360 (Health Report)	2

Of the above, Forms 42A and 5 need only be compiled at first port of call in Australia. Passenger — individual Passenger Cards are utilised therefore no list of passengers required. Agents require 7 copies of Manifest of cargo on board and at least 1 set copies Bills of Lading. These normally received by airfreight or airmail direct from Agents at loading port outside Australia therefore not necessary for Masters to be in possession of either Manifest of cargo on board or appropriate copies of Bills of Lading.

PILOTAGE: 1 vessel, *Wyuna* and three launches, kept on station outside Port Phillip Heads, within limits of cruising station, except for short periods when making shore contacts and from 0900 to 1100 hrs. local time each Monday. *Wyuna* has 2 masts, buff coloured hull and funnel with white painted superstructure.

Pilot vessel on station exhibits by day from foreyard mast, horizontal striped flag, upper half white and lower half red. At night lights as prescribed in International Collision Regulations for a pilot vessel over 65 ft. in length.

Cruising Station: Cruising station extends seaward to 15 miles 221° from centre of fairway between Port Phillip Heads, from which position the Western boundary extends in 334° direction towards coast at Zealey Point, and Southern boundary in 092° direction towards Cape Schank until Arthur's Seat bears 050°, which line towards coast forms Eastern boundary of station. Generally, pilot vessel cruises from 3 to 5 miles 225° from Point Lonsdale Lighthouse in order keep Westward of confused seas caused by tide race through entrance.

Radio message sent direct to pilot vessel 24 hours prior to arrival advising ship's deepest draft and estimated time of arrival at Port Phillip Heads, subject to confirmation pilot vessel. If not in sight, vessels stand off at least 5 miles from Point Lonsdale and make enquiries addressed by visual signals or VHF radio telephone to Point Lonsdale Signal Station. When cutter off station, contact should be made on same call sign and Pilots will answer.

In the entrance the tidal stream runs at its strongest at times of High and Low water and the ebb stream may at times exceed 9 knots. Care must be exercised to keep Westward of the tidal stream in the Fairway whilst awaiting or embarking a Pilot.

Low-powered vessels and vessels over 34 ft. draft are requested to contact pilot vessel or pilot office as to a suitable time to arrive at Pilot Boarding Ground as their passage through the Port Phillip Entrance is governed by the tidal stream.

Deep-laden tankers in heavy weather are advised to rig pilot ladder from Bridge to avoid swamping boat.

Port Phillip Sea Pilot Report: July 1978.

The Port Phillip Sea Pilots now frequently board and disembark from a fast 12 m. launch. When the launch is operating, the pilot cutter "Wyuna" is at anchor inside the Heads off Queenscliff and is the effective operations and control centre for all pilotage operations from seaward.

The Pilot Boarding Ground is still 3 – 5 miles Southwest of Point Lonsdale and when 2 hours from this area vessels should call "Wyuna" on Channel 16 VHF and advice will be given as to which type of ladder should be rigged – that is, for launch or cutter.

If the launch is operating, the ladder should be rigged on the lee side not less than 1.5 m. above the water, with 2 man-ropes the ends of which should be at least 0.5 m. above the bottom of the ladder. At night the light should be rigged abaft the ladder, shining forward so as not to dazzle the launch driver; and a heaving line kept handy for the Pilot's bag.

When approaching the boarding ground, direct contact will be made by the launch on Channel 16 at which time the vessel will be requested to switch to operating Channels 10 or 13.

When the Pilot is boarding, the vessel should maintain a speed of approximately 6 knots with the wind and sea about 4 points on the weather quarter. On some occasions when the swell is the predominant factor, vessels will be requested to steer a particular course.

ANCHORAGE: Quarantine Anchorage: if, from Quarantine Regulations, Southerly gales, or other causes, it is necessary to anchor off Quarantine Station, a vessel drawing more than 20 ft. should anchor to Northward, with jetty bearing 195°, in depths of from 48 to 54 ft., from 3 to 6 cables off-shore; and at night in white sector of jetty light, visible from 126° through South to 195°, preferably with that light bearing 180°, and Point Lonsdale light bearing 280°.

Symonds Channel Anchorage: good anchorage clear of all fairways, in red sector of Low light, and well to windward of Southern shore in Northerlies, is to be had in the middle of Symonds Channel close to its Southern end. A good berth is in a depth of about 40 ft. with Queenscliff High Light bearing 286°, and No. 3 (Tuckey) West Channel in transit with Coles Channel Light.

Queenscliff Anchorage: in anchoring off Queenscliff, care should be taken to keep clear of West Channel fairway by bringing up as near as possible to N.W. side of channel. A good berth in a depth of 38 ft. and in red sector of Low light, may be obtained with High Lighthouse bearing 284° distant half a mile, and fixed green light at Queenscliff South pier head bearing 336°.

Vessels awaiting berths in the Port of Melbourne are normally directed to anchor at pilot's discretion South of Gellibrand light and clear of the Melbourne ship channel.

RESTRICTIONS: Mean Tidal Range is 0.50 m. and mean of all High Waters for 1977 was 0.82 m. Tide is used for the navigation of vessels having drafts in excess of those given in Column 4 of "Max. Size". For the navigation of channels, a minimum under keel clearance of 0.6 m. is required for vessels drawing up to and including 10.9 m. and a clearance of 0.9 m. for vessels having a draft between 10.9 m. and 12.2 m. Vessels over 183 m. in length. Pilots require 10% of maximum draft under keel clearance to navigate River Channel at all times, subject to draft restriction in Column 5 "Max. Size".

Tankers which are not gas-free or with cargoes which have a flashpoint of less than 150°F will not be navigated to or from river berths at night.

PRATIQUE: All overseas vessels at first port of entry to Australia or at any subsequent ports, subject to quarantine until pratique granted or until vessel released from quarantine. If examinations and inspections satisfactory vessel granted pratique for all Australian ports, provided all on board have satisfactorily completed Certificate of Vaccination within last 3 years, or if vessel is 14 days or more from date of departure from last overseas port. A list of names and addresses of passengers also required at first port of entry. 24 hours quarantine clearance of overseas vessels available. Treatment of Crew members for illnesses other than quarantinable diseases arranged by private practitioners through ship's Agent.

Radio Pratique: Concession of radio pratique is to all vessels carrying surgeons, provided these officers medical graduates of a university. Following requirements to be met in the case of a vessel requiring radio pratique.

(a) (1) ETA.

(2) that individual inspection of all persons on board has been made by ship's surgeon within 24 hours of expected time of arrival and no cases of quarantinable diseases or varicella in an adult or coloured person, not associated with cases in children, then existed on board or had occurred or had been on board within previous 14 days: and

(3) that all members of crew currently satisfactorily vaccinated against smallpox (i.e. not less than 8 days nor more than 3 years previously in the case of revaccination) and a satisfactory Vaccination Register is kept on board;

(4) that all passengers over age of 12 months have been satisfactorily vaccinated against smallpox before embarkation and are in possession of current valid International Certificate of Vaccination against smallpox (i.e. all certificates duly authenticated, show that vaccination has taken place not less than 8 days nor more than 3 years previously in the case of primary vaccination and not more than 3 years previously in the case of revaccination) except those who before embarkation submitted a medical certificate stating that they have a medical disability which would make vaccination inadvisable and except those who before embarkation signed a statutory declaration stating that they object to vaccination on religious grounds.

(b) Commonwealth Director of Health will advise Master by wireless whether radio pratique is granted or not.

(c) A vessel granted radio pratique will fly "Q" flag by day and Quarantine signal by night and will on arrival at quarantine anchorage be boarded by Quarantine Officer with Immigration and Customs Officers. Quarantine Officer will inspect crew Vaccination Register and passenger manifest on which must be stated full name, address in Australia and vaccinal status of each passenger and will see cases of illness brought to notice by ship's surgeon, including all cases infectious disease and will receive Primary Health Report. If no cases of illness as referred in sub-paragraph *(a)* (2), Quarantine Officer will confirm radio pratique and issue Pratique Certificate for all ports. Master will not be required to submit Supplementary Health Report at subsequent ports. When pratique confirmed, "Q" flag may be lowered.

(d) Notwithstanding that pratique for all ports may have been granted, Master will still be responsible for reporting any case of infectious diseases which may subsequently occur whilst vessel in Australian waters.

Should a case of infectious disease (not being a quarantinable disease or varicella in an adult or coloured person not associated with cases in children) occur on board whilst vessel at sea in Australian waters Master will be required to advise by radio Commonwealth Director of Health for State in which next port situated, who will arrange for a Quarantine Officer to see case on arrival, Master will not be required to fill in a Supplementary Health Form and vessel will be permitted to proceed direct to berth without flying "Q" flag.

Should a case of suspected quarantinable disease or a case of

(continued page 56)

MAX. SIZE: In the Port of Melbourne, draft and length limitations for navigation of vessels are determined by the Port Phillip Sea Pilots, and these divisions are outside the jurisdiction of the Port Authority, the Melbourne Harbour Trust Commissioners.

Particulars concerning maximum lengths and draft of vessels navigating by day and night to and from berths in the port.

1	2	3	4	5	6	7
	Day		*Night*			
Berth	*Max. Length (m.)*	*Max. Draft LW (m.)*	*Max. Length (m.)*	*Max. Draft (m.)*	*Max. Draft LW (m.)*	*Remarks*
SWANSON DOCK:	289	11.0	228	11.0		1W–1E–2E either way. 2W–3W–3E Head in only. Vessels between 228 m. and 289 m. by day and above 213 m. by night will not be swung if berths to seaward of 31.5 South Wharf are not clear. Specially indentified vessels will be piloted at the discretion of Pilot Service.
	183	11.6	183		11.6	Vessels of 183 m. or under will be swung to ALL berths, day or night.
APPLETON DOCK:	253	9.4	213	9.4		
	183	9.7	183		9.7	
VICTORIA DOCK:	178	8.8	168		8.8	2/VD or 21/VD clear if departing at night. Depart any time up to 152 m.
8/VD	150	7.9	150		7.9	6/VD and 9/VD – Clear if over 137 m.
22VD, 23VD, 24VD	213	8.5	213	8.5		
	183	8.8	183		8.8	
SOUTH WHARF:						
15 – 19/SW	183	7.9	183		7.9	By night – (i) All berths on South Side to seaward of allocated berth including 21/SW to be clear–OR–(ii) All berths on North Side up to that berth opposite allocated berth and berth downstream to be clear.
			168		7.9	If above conditions cannot be met, up to 152 m. can depart at anytime. Identified vessels up to 198 m. and 7.9 m. draft+tide will be berthed by day only head in to 17–19/SW and can depart under conditions (i) and (ii) above.
21SW and 26SW	213	8.5	213	8.5		
32SW	183	8.8	183		8.8	
24SW – 25SW	213	7.7	213	7.7		
	183	7.9	183		7.9	
1/MARIBYRNONG:	178	9.4	144		7.9	Vessels over 91.5 m. head in only.
1 and 2/YARRAVILLE:	178	7.3	144		7.3	Tankers which are not gas free will not be navigated to or from River Berths at night.
5/YARRAVILLE:	178	7.9	144		7.9	
6/YARRAVILLE:	250	9.4	213	9.4		
	183	9.8	183		9.8	
HOLDEN DOCK:	183	9.4	137		7.9	Maximum beam – 26.5 m.
GELLIBRAND PIER:	289	11.3	207		10.7	
B/WATER PIER:	213	11.3	178		9.7	
	228	7.6	178		7.6	
WEBB DOCK: – 1	137	6.4	137		6.4	
2	140	6.4	140		6.4	
3	222	9.1	222	9.1		
	183	9.4	183		9.4	
4	222	10.2	222	10.2		
	183	10.6	183		10.6	
STATION PIER:						
Outer Berths –	305	10.4	305		10.4	
Inner Berths –	305	9.7	305		9.7	
PRINCES PIER:						
Eastern Berths –	259	10.4	259		10.4	
Western Berths –	259	9.7	259		9.7	

Conversion of relative lengths and draft to feet;

Length		*Draft*	
305 m.	= 1,000 ft.	11.6 m.	= 38 ft. 0 in.
289 m.	= 950 ft.	11.3 m.	= 37 ft. 1 in.
259 m.	= 850 ft.	11.0 m.	= 36 ft. 1 in.
253 m.	= 830 ft.	10.6 m.	= 34 ft. 9 in.
250 m.	= 820 ft.	10.4 m.	= 34 ft. 1 in.
228 m.	= 750 ft.	10.2 m.	= 33 ft. 6 in.
222 m.	= 730 ft.	9.8 m.	= 32 ft. 2 in.
213 m.	= 700 ft.	9.7 m.	= 31 ft. 10 in.
207 m.	= 680 ft.	9.4 m.	= 30 ft. 10 in.
198 m.	= 650 ft.	9.1 m.	= 29 ft. 10 in.
183 m.	= 600 ft.	8.8 m.	= 28 ft. 10 in.
178 m.	= 585 ft.	8.5 m.	= 27 ft. 11 in.
168 m.	= 550 ft.	7.9 m.	= 25 ft. 11 in.
152 m.	= 500 ft.	7.7 m.	= 25 ft. 3 in.
150 m.	= 495 ft.	7.6 m.	= 24 ft. 11 in.
144 m.	= 472 ft.	7.3 m.	= 23 ft. 11 in.
140 m.	= 460 ft.	6.4 m.	= 21 ft. 0 in.
137 m.	= 450 ft.	0.6 m.	= 2 ft. 0 in.
91.5 m.	= 300 ft.		
26.5 m.	= 87 ft.		

All vessels over 183 m. navigating the River and Webb Dock must have 10% of Draft under keel clearance. (Pilots' Requirement). Trust requires 0.6 m. under keel clearance at all times. Tidal readings may be applied to drafts shown in Columns 3 and 6. All movements must be considered subject to weather conditions.

Shipping Channels

Channel	*Depth m.*
Fawkner Beacon to No. 7 Beacon	12.2
No. 7 Beacon to Port Melbourne	10.6
No. 7 Beacon to No. 16 Beacon	12.2
No. 16 Beacon to River Entrance	12.2
No. 18 Beacon to Webb Dock	11.2
River Entrance to Swanson Dock	12.2
Swanson Dock Entrance to 24 V.D.	10.3
24 Victoria Dock to V.D. Entrance	9.4
Victoria Dock Entrance to and including 21 S.W.	9.4
21 South Wharf to 10 South Wharf	8.5
Holden Basin to 1 Maribyrnong	10.3 to 10.0

Swinging Basins	*Diameter (m.)*	*Depth (m.)*
Victoria Dock	274	9.7
Appleton Dock	366	10.3
Swanson Dock	329	10.3
Holden	274	10.0
Port Melbourne	518	10.9
Webb Dock	305	9.4
Gellibrand	396	11.2

BRIDGE: Clearance under Westgate Bridge is 52.4 m. at LW. Johnson Street Bridge under construction.

varicella in an adult or coloured person occur on board whilst at sea in Australian waters, Master required radio details to Commonwealth Director of Health for State in which next port situated and await instructions. Commonwealth Director of Health will decide according to circumstances whether inspect vessel outside Quarantine Line or permit it to proceed to berth and will advise Master.

(*e*) Should it come to notice in any particular case that radio pratique has been granted as a result of a wireless message sent in accordance with sub-paragraph (*a*) whereas in fact wireless message contains false information, matter will be investigated thoroughly and reported to the Director General of Health who will decide whether radio pratique will be denied in future to vessels on which Master and the ship's surgeon hold responsibility.

RADIO: Melbourne Radio VIM.

A Shipping Control Centre referred to as "Harbour Control" is established on the southern side of Victoria Dock entrance. It is a two storied structure supported on a rectangular tower with an overall height of 39.6 m. Traffic signals are exhibited at a height of 36.6 m.

Movement of traffic within the Port of Melbourne is controlled by the Harbour Master through Control Officers operating from this Centre who direct all shipping movements in and out of the port, and co-ordinate all ancillary services connected with shipping movements on a 24 hour basis.

The radio call sign is "Harbour Control", and the following frequencies and channels are available—

156.3 mHz Channel 6 used generally for Interstate Shipping.
156.4 mHz Channel 8 pilots and tugs (continuous watch).
156.6 mHz Channel 12 working.
156.8 mHz Channel 16 calling (continuous watch).

When approaching the Port of Melbourne radio communication is made with "Harbour Control" initially on Channel 16 and then on a channel as directed for berthing instructions and information regarding the movement of other vessels. The Master of a vessel proceeding inwards shall not pass Gellibrand Pile Light until permission has been granted by Harbour Control. Breakwater Signal Station may be used as an alternative to communicating with "Harbour Control".

TUGS: Tugs attend for inward-bound vessels at or in vicinity of Gellibrand Light for vessels proceeding either up river or to Port Melbourne berths. On departure and should vessels require attendance down river, service terminated in vicinity of river entrance. Tugs present for service at any point required by Owner or Agent. Ships lines, or tug lines at charge of A$10.00. Crews of tugs will not accept wire tow line. Wire tow line with rope end of 5 or 6 fathoms acceptable, rope section being available for tugs towing hook.

BERTHING:

Yarra River North Bank

Berth No.	*Locality*	*Depth of Water* m.	*Length of Berth* m.	*Miscellaneous Information*
10	North Wharf	8.5	118	
11	North Wharf		136	
12	North Wharf		182	Berths Nos. 10–17 enclosed inc. security compounds.
13	North Wharf		135	
14	North Wharf		135	
15	North Wharf		201	
Appleton dock				
B	Appleton Dock	10.3	192	Three sets of rail tracks on 20.7 m. wide apron 5/3 tonne level luffing wharf cranes available. all berths.
C	Appleton Dock		192	
D	Appleton Dock		192	

Yarra River South Bank

Berth	*Locality*	*Depth of Water* m.	*Length of Berth* m.	*Miscellaneous Information*
14	South Wharf	4.6	176	Livestock, Roll-on/Roll-off Container, Unit Load and Conventional Cargo Handling.
15	South Wharf	8.5	171	Enclosed in security compound.
16	South Wharf		159	Seven acre stacking area behind berths Nos. 16–17 mainly for timber imports.
17	South Wharf		159	
18	South Wharf		159	
19	South Wharf		159	
21	South Wharf	9.4	244	Steel. 6/6 tonne overhead shed cranes, and 4/6 tonne wharf cranes.
23		8.5	72	
26	South Wharf			
27	South Wharf	9.4	158	Berths Nos. 27–32 enclosed in security compound.
			146	
28	South Wharf		146	
29	South Wharf		146	
30	South Wharf		183	
31	South Wharf		183	5/3 tonne level luffing travelling electric wharf cranes.
32	South Wharf		253	
Port Melbourne Area				
O.E.	Princes Pier	11.0	196	Pier enclosed in security compound. Oil bunkering facilities all berths. Four sets of rail tracks on wharf aprons.
O.W.	Princes Pier	10.3	196	
I.E.	Princes Pier	11.0	196	
I.W.	Princes Pier	10.3	196	
Victoria Dock				Entire Dock System enclosed in Security Compound.
1	Victoria Dock	9.4	58	
2	Victoria Dock		171	3 sets of rail tracks on the wharf.
3	Victoria Dock		158	
4	Victoria Dock		199	
5	Victoria Dock	9.4	179	Roll-on/Roll-off Lift-on/Lift-off
6	Victoria Dock	9.4	169	Container and Unit Load Cargo.
8	Victoria Dock	8.5	186	
9	Victoria Dock	9.4	164	
10	Victoria Dock		161	
13	Victoria Dock		161	
14	Victoria Dock		174	1/3 tonne level luffing travelling electric wharf cranes. Berths Nos. 16–24 have 3 sets of rail tracks on apron.
18	Victoria Dock	9.4	167	10/3 tonne level luffing, travelling electric wharf cranes.
19	Victoria Dock		145	
20	Victoria Dock		146	
21	Victoria Dock		165	
22	Victoria Dock		174	Groat Silos.
23	Victoria Dock		174	3/3 tonne level luffing, travelling electric wharf cranes
24	Victoria Dock		174	

SPECIALISED CARGO HANDLING FACILITIES:

Port Melbourne Area

Berth	*Locality*	*Depth of Water* m.	*Length of Berth* m.	*Miscellaneous Information*
O.E.	Station Pier	11.0	221	Principal Overseas Passenger Terminal
O.W.	Station Pier	11.0	257	
I.E.	Station Pier	10.3	218	
I.W.	Station Pier	10.3	218	Four sets of rail tracks on aprons for Rail Cargo and Passenger Trains. Snack Bar and Souvenir Kiosk. Information Service run by multi-lingual Port Hostesses. 8/3 tonne level luffing, travelling, electric wharf cranes.
Webb Dock				
No. 1	A.N.L. Terminal	7.0	122	Roll-on/Roll-off Loading facilities.
No. 2	A.N.L. Terminal	7.0	152	Container, Unit Cargo and passenger handling facilities for Northern Tasmanian ports. 1/25 tonne Derrick crane. 1/15 tonne Derrick crane.
No. 3	A.N.L. Terminal	9.4	183	1/25 tonne travelling electric crane.
No. 4	A.N.L. Terminal	11.3	220	1 single lift container crane

Berth	Locality	Depth of Water m.	Length of Berth m.	Miscellaneous Information
Swanson Dock				
No. 1	W. Swanson Dock	12.3		Overseas Container Cargo. 3 Container Crane Twin Lift.
No. 2	W. Swanson Dock		244	
No. 3	W. Swanson Dock		306	
No. 1	E. Swanson Dock		244	Overseas Container Cargo
No. 2	E. Swanson Dock		259	Common User Berth. 3 Container Crane Twin Lift.
Yarra River South Bank				
No. 25	South Wharf	8.5	158	Bulk Gypsum. 2/7.5 tonne grabbing crane conveyor system.
Yarra River North Bank				
No. 9	North Wharf	8.5	114	Bulk Cement.
Lower River Area				
No. 1	Yarraville Wharf	7.9	106	Anhydrous Ammonia.
No. 2	Yarraville Wharf	7.9	167	Sulphuric Acid.
No. 5	Yarraville Wharf	8.5	146	Bulk Raw Sugar.
No. 6	Yarraville Wharf	9.7	256	Bulk Chemicals.
Holden Dock Yarraville		10.0	213	Bulk Oil.
No. 1	Maribyrnong	9.8	170	Bulk Petrochemicals, Molasses and Lub. Oil.
Williamstown Area				
West Side Breakwater Pier		11.8	222	Bulk Crude Oil.
East Side Gellibrand Pier		11.8	274	
Appleton Dock				
E	Appleton Dock	10.3	207	Bulk Phosphatic Rock and Coal, Scrap Metal. 4/7.5 tonne 2 1/6t electric grabbing cranes. Available at the two berths.
F	Appleton Dock		192	

See also "Tankers".

CRANE: Self-propelled floating crane with 250 tonne capacity available.

STEVEDORES: ETA Advices: Firm ETA, if possible, before noon on previous day to arrival. If not possible no later than 1500 hrs. on day previous to arrival.

MEDICAL: No advance notice necessary for medical attention required on vessel's arrival. All hospital facilities available. No inoculations required for vessels coming to Australia but Master should possess International Health Cards for each member of crew.

TANKERS: Holden Oil Dock at Yarraville suitable for tankers up to 183 m. length, draft 9.4 m.

Williamstown: Gellibrand Pier, depth alongside 39 ft. can accommodate tankers up to 290 m. length. Discharge via Chiksan arms.

Breakwater Pier, depth alongside 39 ft. accepting tankers up to 740 ft. length.

Maribyrnong: No. 1 berth, depth 9.1 m. can accommodate tankers up to 178 m. length. Petrochemical and molasses berth, depth alongside 9.1 m.

Ballast: Slop facilities only at Holden Oil Dock.

DENSITY: 1,000.

FRESH WATER: Water available at wharf face at 100 ft. intervals. Rate 50–100 t.p.h.

FUEL: 24 hours notice required. All grades 1–1500 secs. Rl. Marine Diesel. Light Marine Diesel. Gas Oil 34 sec. Red No. 100F. Bunker Fuel 600 sec. Red No. 100F. Light Diesel 37 sec. Red No. 100F.

At Gellibrand and Breakwater Piers. Min. notice 48 hours; prefer notice 4–5 days.

Tanker fuel oil 450 SSF at 122° F. Volume – unlimited if 4 to 5 days notice given.

FIRE PRECAUTIONS: Copy of Handbook "Emergency Action" is handed to Master of tankers together with booklet "Advice to Masters" printed in eleven languages.

DEVELOPMENTS: Lower Yarra Crossing: New bridge with clearance of 170 ft. under construction, on completion vessels with a draft of 12.2 m. and length of 289 m. will be able to navigate the river 24 hours a day.

A fourth Roll-on/Roll-off berth is operational at Webb Dock.

GANGWAY WATCHMEN: Shore Watchmen not usually employed and this service left to discretion of Master.

OPENING/CLOSING HATCHES: Normally carried out by Stevedores. Ship's crew may if required by vessel to do so. Crew may close hatches prior to sailing; but if Stevedores instructed to do so, they then claim right to finish, unless ship sails before completion of work.

SHIP CERTIFICATES: Register – showing vessel's name, port of registry, gross and nett tonnages and Owner. Loadline Certificate which must be current. Safety Radio Certificate. Safety Equipment Certificate. Light dues receipt, ship's Articles (British). Clearance from previous port.

CUSTOMS ALLOWANCES: 200 cigarettes in an opened carton *or* 0.5 lb. cigars *or* 0.5 lb. tobacco. 1 bottle spirits (opened).

CARGO GEAR: This must comply with Australian Regulations, as issued by the Ministry of Shipping and Transport.

When working cargo with ship's gear, certificates should be available to attest to identification and good condition of all such gear. If vessel on first visit to Australia and certificates not available, a declaration by Master will be accepted provided gear in order. On subsequent visits certificates and identification of each item of gear must be readily produced.

IDENTITY CARDS: Not required to be carried by crew going ashore in Australia. However, Section 23 of the Migration Act 1958/1964 provides that Masters of vessels entering Australia from overseas shall have in their possession an identity card in an approved form for each member of crew. These provisions included in the Act to ensure positive identification available to departmental officers should any Seaman, not being an Australian citizen, desert vessel. Should vessel arrive Australia without required Seamen's identification cards. Seamen unable to go ashore until photographer called to vessel order photograph each crew member, and identification cards completed.

Following nationalities need not complete identification card required under Migration Act provided Crew members in possession of relevant Seamens Identity certificates/discharge book; Canada, Denmark, Fiji, Ghana, Hong Kong, India, Israel, Italy, Japan, Malayasia, Norway, South Africa, South Korea, Pakistan, United Kingdom.

Masters of vessels, Australians and New Zealanders are not required to have such an Identification Card.

Masters are reminded that Crew members' travel documents and Commonwealth of Australian Forms M.315, where applicable, are to be retained in the custody of the Master at all times, and are to be produced to Customs Boarding Officers upon demand.

CONSULS: The following countries are represented by consuls at Melbourne:

Belgium
Brazil
Chile
China
Denmark
Dominican Rep.
Ecuador
Finland
France
Germany
Greece
Honduras
Iceland
Italy
Japan
Mexico
Netherlands
Norway
Panama
Peru
Philippines
Portugal
Spain
Sweden
Switzerland
Thailand
U.S.A.
Uruguay
Venezuela

REPAIRS: All major repairs possible.

DRYDOCKS: Three. Largest Dock is a floating dock 156 m. × 24 m.

REPATRIATION: All facilities available for effecting crew changes and repatriation – namely sea, air and rail.

HOLIDAYS: Sunday, Christmas Day, Good Friday, Labour Day, Picnic Day, Anzac Day: with exception of Sunday are regarded as "close holidays" and waterside workers cannot be required to work on these days. Only work of special nature performed on these days by agreement.

Following ordinary holidays observed: Boxing Day, New Year's Day, Australia Day, Easter Monday, Queen's Birthday, Melbourne Cup Day.

On Boxing Day and New Year's Day, waterside workers will work on following classes of vessels only, namely:

(*a*) Passenger ships to sail on schedule.
(*b*) Ships to finish and sail before next pick-up of labour.
(*c*) Ships which in opinion of local Board of Reference, should be declared "Urgent Vessels".
(*d*) Marine casualties.

On remaining ordinary holidays work performed if required by an employer. Work performed on holidays subject premium rates of pay.

POLICE/AMBULANCE/FIRE: Fire, Ambulance, Security – Port Emergency Service. Tel. 61-2861 or, by VHF Radio Channel 16 "Melbourne Port Emergency".

TELEPHONES: Telephone can be placed aboard at all berths. Charge 90 cents per quarter day includes service charge and local calls. Trunk calls cannot be made from shipboard phones.

SERVICES: Tank cleaning. Compass adjusters available.

SHORE LEAVE: Crew allowed ashore. Visitors to ship after dark require permit issued by Master. No passport required while ashore.

PORT AUTHORITY: Melbourne Harbour Trust Commissioners.

AGENTS: Patrick Agencies, Box 4329 GPO, 8/12 Market Street, Melbourne, Victoria, 3001. Cables: "Rikpat". Tel. 61–2941. Telex. AA. 30456. After hours Tel. 61–2941.

NEWCASTLE, N.S.W.: 32.56 S. 151.47 E.

(See Plan Book)

PORT LIMITS: The port limits are at the entrance between the end of the breakwater. New charter parties accept vessel off the port.

DOCUMENTS: See "Melbourne".

PILOTAGE: As much notice as possible through Maritime Radio, Sydney (VIS), amending 2 hours prior arrival. Amendment through Channel 16 VHF, to Harbour Control. Telegraphic address "Marboard". Pilot vessel painted high-visibility orange, "Pilots" on

deck-house in black paint. Boarding ground on side East of entrance. A good lee, speed 3-5 knots, no boatrope, ladder 8 ft. above water with manropes.
ANCHORAGE: No good anchorages off port. A restricted anchorage exists immediately off entrance. No anchorages within the port.
RESTRICTIONS: Entrance channel dredged to 11 m. ISLW. – a minimum keel clearance of 10% draft required. Certain berths within port may only be worked during slack water or early ebb tide.
MAX SIZE: Max. d.w.t. for bulk cargo vessels 65,000. Max. length of 800 ft., no beam restriction, draft up to 38 ft. ISLW. Vessels over 700 ft. navigated in daylight only (inward).
HEALTH: Refer to "Melbourne".
RADIO: All radio messages through Sydney (VIS).
TUGS: Tugs usually come alongside shortly after entering breakwater. Ship's lines for towing lines, tug's lines for tugs alongside.
BERTHING: See Restrictions.

Thirty berths with lengths from 500 ft. to 2,025 ft. Depths alongside up to 38 ft.

New Cargo Berth suitable for unit and limited container traffic, depth alongside 36 ft. ISLW.

New grain berth with 4 loading heads can accommodate vessels up to 800 ft. length. Depth alongside 38 ft.
RADAR/VHF: No port radar. VHF Channels 16, 13, 12, 4. Pilot has own set. Also see "Sydney-VHF".
MEDICAL: All hospital facilities available.
TANKERS: One tanker berth – 33 ft. depth water alongside, 600 ft. in length.
DENSITY: Density varies considerably throughout port, with particular reference to upstream rains.
FRESH WATER: Available all berths, 4–15 t.p.h. delivery, dependent on other demands.
FUEL: Normal bunkering available by either road or barge, or pipeline at inflammable liquids wharf.
FIRE PRECAUTIONS: Written notice to Fire Brigade for tankers.
BULK HANDLING FACILITIES: Coal Basin berth numbers 1 and 2 loading capacity 2,000 t.p.h.

Dyke Coal Loader: loading capacity 600 t.p.h.

Western Basin: Berth number 3, bulk wheat loading.

Kooragang Island Bulk berth: two gantry cranes each of 10 tons capacity. Grab unloading 650 t.p.h.

Grain – No. 3 Western Basin – four 1,000 t.p.h. loading heads.

Coal – No. 1 Basin Coal Loader – two 1,000 t.p.h. heads and Dyke Coal Loader, one 600 t.p.h. head.

Iron and Limestone – BHP No. 5 berth – 3 ore bridges with 10 to 20 ton grabs.

Bulk Berth – two 650 t.p.h. bulk unloaders used for phosphate, sulphur, alumina, petroleum coke and cement clinker.

Containers – 1 general cargo berth, No. 1 Throsby, fitted with 26-ton luffing crane. 30 ton Portainer at West Basin.

Liquid Chemicals and LPG – now use Bulk Berth, Kooragang. Will use new Bulk Liquid Berth, Kooragang which is under construction.

New coal loader with a capacity of 10,000,000 tons annually constructed. The existing coal loader will continue operation. Nos. 4 and 5 Dyke berth used for coal vessels. No. 4 waiting berth. No. 5 loading berth. 2 heads, each 2,000 t.p.h. Also see "Shipmasters Report".
DEVELOPMENTS: New bulk liquids berth to be built at Kooragang Island.

Steelworks planned.
GANGWAY/DECK WATCHMEN: Services of watchmen available and recommended ($1.50 hourly average).
OPENING/CLOSING HATCHES: Dependent on type of cargo and hatch (coal, wheat, ship's crews closing hatches).
CERTIFICATES AND CUSTOMS ALLOWANCES: See "Melbourne"
CARGO GEAR: No additional other than wire preventers to derrick heads if rope guys used. Also see "Melbourne".
CREW I.D. CARDS: See "Melbourne".
CONSULS: The following countries are represented at Newcastle: Belgium, France, Netherlands, Norway and Sweden.
REPAIRS: Most deck and engine repairs.
DRY DOCK: One floating dock, Government managed, 630 ft. length and 82 ft. beam. Capacity about 9,000 tons.
REPATRIATION: Normal facilities available.
AIRPORTS: Two, roughly 7 miles from city. Several flights daily to Sydney.
TIME: GMT plus 10 hours. Clocks advanced 1 hour between October and February.
HOLIDAYS: Christmas Day: Good Friday; Labour Day; Picnic Day; Anzac Day are regarded as close holidays and waterside workers cannot be required to be worked on these days. On Boxing Day, New Year's Day, waterside workers will work on following classes of vessel only;

(a) Passenger ships to sail on schedule; *(b)* ships to finish and sail before next pick-up of labour; *(c)* marine casualties; *(d)* other vessels which are agreed between employer and WWF branch officials in the port concerned; if there is no agreement on a port basis, agreement as to any such ships, to be reached at Federal level.

On remaining ordinary holidays, work performed as required by an employer. Work performed on holidays subject to premium rates of pay. No Saturday afternoon work unless vessel is proceeding to sea.
POLICE/AMBULANCE/FIRE: Dial "000" for Emergency.
TELEPHONES: 'Phones available at all working berths. Costs 50 cents daily plus cost of calls plus 30 cents booking fee.
SERVICES: Compass adjusters and surveyors available.
DELAYS: Waiting for coal berths occasionally, usually no wait for general cargo wharves.
SHIPMASTER'S REPORT: 1978.
New Coal Berth No. 5.

Air draft 61 ft., entering with slack water – by day only. Sailing with the tide – night and day.

Harbour control: VHF Channel 13.

Anchorage: liable to the weather – attention to be paid to the Easterly, South Easterly and Southerly winds which can suddenly blow strongly within 1 hour's time. Best anchorage: 108°, two miles from South breakwater. Not recommended to anchor North of Latitude 32° 55′ South.
AUTHORITY: Maritime Services Board of New South Wales.
AGENT: Patrick Agencies, Box 447F PO, 10/12 Telford Street, Newcastle, NSW 2300. Cables "Rikpat". Tel. 2-2353. Telex AA 28192.

PORT AUGUSTA, S.A.: 32.29 S. 137.46 E.

CERTIFICATES/DOCUMENTS/HEALTH: See "Melbourne".
PILOTAGE: One mile N.W. of Eastern Shoal North Beacon. The regulation pilot ladder secured four steps up from water and manropes are required. Boat ropes not required.
RESTRICTIONS: 16 ft. low water. Min. 2 ft. under keel. No navigation at night. Max. length 450 ft. overall. Tug required for vessels 410 ft. and over.
TUGS: From Port Pirie or Whyalla.
BERTHING:

No. 1	South	370 ft.	Depth	20 ft.
No. 2	Centre	400 ft.	,,	20 ft.
No. 3	North	420 ft.	,,	18 ft.

Total length of wharf 1,190 ft.
FRESH WATER: 10 t.p.h.
REPAIRS: Minor repairs only.
TIME: GMT plus 9.5 hours.
TELEPHONE: Police 42-3000; Fire Brigade 42-2000; Hospital 42-2011.
AGENT: See "Adelaide".

PORT GILES, S.A.: 35.02 S. 137.46 E.

On Western shore of Gulf of St. Vincent, 36 miles S.W. direction from Port Adelaide. For entry formalities not listed below, see "Adelaide".
PILOTAGE: Compulsory. If vessel on first entry to Australia, pratique and surveys are carried out at Semaphore anchorage, Port Adelaide, where Pilot will board.

If proceeding direct to Port Giles, 12 hours' notice required to Dept. of Marine and Harbours, Port Adelaide. Pilot boarding station is at Northern end of Troubridge shoal, about 1 mile West of MacDonnell Sound Light Beacon.
ANCHORAGE: MacDonnell Sound, 7 miles from berth. Also see "Pilotage".
MAX. SIZE: Vessels up to 40,000 d.w.t. able to load fully and depart at lowest tide. Normal limit to length of vessel 675 ft. (206 m.), beam 130 ft. (40 m.).
VHF: VHF radio telephone.
BERTHING: The new jetty, about 1.5 miles North of Giles Point, reaches out from the shore some 2,000 ft. (610 m.) to the seaward end dolphin. The ship's berth has a depth of 38 ft. (11.6 m.) below low water over a length of 840 ft. (260 m.). Grain transported from Silos to ship's side by conventional belt conveyor capable of handling 800 tonnes an hour. Alongside ship, elevated gallery with five swivelling and telescopic booms feeds grain into any hold without movement of ship along berth. Each boom has a max. load rate of 400 tonnes an hour so that at least two must be used to achieve full ship loading rate.
TUGS: None. Mooring launch available, but if tugs required, must be obtained from Port Adelaide.
FRESH WATER: Available.
TELEPHONES: Available on berth.
FUEL/REPAIRS: None.
TIDES: Mean high water springs 6.6 ft. (2 m.), mean high water neaps 4.0 ft. (1.2 m.) (Edithburgh).
AUTHORITY: Department of Marine and Harbours, Adelaide.
AGENT: Sub-agent of Patrick Agencies, Adelaide.

PORT HEDLAND, W.A.: 20.18 S. 118.35 E.

(See Plan Book)

PORT LIMITS: An arc of a circle of 10 miles radius with centre at Hunt Point Beacon.
APPROACHES: Port Hedland, entered between Airey Point (Lat. 20° 18′ S. Long. 118° 35′ E.) and Hunt Point, about 3.25 cables N.N.W., is a secure harbour with dredged Channel giving a depth of 11.8 m. below datum, a turning basin with a depth of 8.2 m. below datum. The Channel extends some 7.75 miles seaward from the turning basin and is defined by beacons, buoys and leading marks.

The most conspicuous object in daylight is the Crushing Plant owned by the Mt. Newman Mining Company. This plant is 47.24 m. above sea level, and is of oblong shape, situated 095° (T) by

1,383.74 m. from the Shipping Control Tower at Lat. 20° 19′ S. Long. 118° 34′ 50″ E. Cooke Point, which terminates in black, steep-faced rock, is sharply defined. Finucane Island water tank, 5 cables W.N.W. of Hunt Point, is also conspicuous.

Shipmaster's Report: Proceeding from Kobe, the vessel passed 10 miles East of Imperieuse Reef L.H. thence to position 7 miles North of Bedout Island L.H. From there the track printed on the Australian charts was followed until the Sea buoys were picked up. From Bedout Is. the Decca was found to be fairly reliable improving as we neared the land.

The buoyage system is as follows:

Name or No. of Buoy	*Position*	*Type*	*Inwards Pass*
Cornelisse Shoal Buoy	20° 02′ 10″ S 118° 22′ 51″ E	Conical GP.Fl.(3) 9 sec.	Stbd. Hand
C.1	19° 59′ 58″ S 118° 25′ 45″ E	Conical Fl.3 sec.	Stbd. Hand
C.2	20° 02′ 24″ S 118° 25′ 07″ E	Can Fl.R.ev. 5 sec.	Port Hand
C.3	20° 04′ 36″ S 118° 25′ 32″ E	Can Gp.Fl.R (4) ev. 12 sec.	Port Hand
C.4	20° 06′ 33″ S 118° 28′ 02″ E	Conical Fl.2.5 sec.	Stbd. Hand
C.5	20° 10′ 29″ S 118° 30′ 36″ E	Can Fl.R.5 sec.	Port Hand
C.6	20° 11′ 32″ S 118° 31′ 11″ E	Sarus Tower Fl.R. 10 sec.	Port Hand

Charts L (D4) Aus. 53 and L (D4) Aus. 739 are Decca lattice charts.

The most conspicuous land object, by daylight, ashore is the Crushing Plant of Mt. Newman Mining Co. This plant is an oblong shape, about 47.24 m. high (above sea level) situated 095° True × 1,383 m. from the Shipping Control Tower in Lat. 20° 19′ S., Long. 118° 34′ 05″ E.

Cooke Pt. Lt. is exhibited from position Lat. 20° 18′ 16″ S., Long. 118° 37′ 52″ E., Gp.Fl.(3) ev. 15 sec. 37 m. high. Visible for 17 miles.

Port Hedland is entered between Airey Pt. (Lat. 20° 18′ S., Long. 118° 35′ E.) and Hunt Pt. 3.25 cables N.N.W. It has a dredged channel with a depth of 11.8 m. below datum (the datum was lowered by 1.0 m. in 1975), a turning basin with a depth of 8.2 m. below datum. The channel extends for 7.75 miles to seaward from the turning basin and is well marked by buoys. The limits of the port are defined as: "all that piece of water within a radius of 10 miles off Hunt Pt. Beacon (No. 29)". Numerous shoals exist either side of the approach channel.

At the entrance to Newman Channel is No. 8 buoy, (No. 7 buoy is now non-existent). A pair of Beacons No. 9 and No. 10 showing red and green lights respectively also mark the entrance to the channel. The Pilot boards in this vicinity.

Cornelisse Buoy is fitted with a radar reflector and marks. "Cornelisse Shoal", has been known to shift from its position and should be passed well to the Eastward.

The buoy known as "Spoil Ground Buoy" is in a position 357° True, 5.4 miles from Finucane Is. Water Tower and in conjunction with No. 6 buoy marks the Southern end of the anchorage. Vessels should anchor North of the line joining these two buoys. The bottom is sandy, but the holding ground reported good.

Vessels should call Broome Radio for emergency Notices to Mariners affecting Port Hedland approaches.

Vessels inward bound may encounter vessels outward bound displaying signals for deep drafted vessels, showing that they must keep to the buoyed tracks.

DOCUMENTS:

2 Copies Health Report Q360 for Quarantine Office to be accompanied by Crew List showing Vaccination dates.

1 Copy Store List Form 42A. All narcotics and restricted drugs to be identified by type, size and quantity. Report is to include lifeboat kits.

1 List Crew Possessions. Form 5 including Declaration Sheet. In declaring goods, quantity, description and value to be stated. In the case of all watches, radios, cameras, binoculars and the like, maker's name or brand and serial numbers must be shown.

1 Crew List. Form M & S 11. Comprised White Cover Sheet, 2 copies plus Green Listing Sheet, 2 copies.

1 List Ship's Pets. QA4. If any pets, including any animal, bird or fish on board to be accompanied by 1 pink QA5.

5 Copies Crew List. Company type. (Customs 3, G.M.L. 1 and Agent 1).

Identification Card. Form M315. One per crew member, except as detailed below.

With reference to Seamen's Identification Cards, a Passport size photograph of the seamen is sufficient. A side-face photograph is not required. Seamen in possession of the following National travel documents are no longer required to have an Identification Card in Commonwealth of Australia Form M315.

Canada	Passport or Seaman's Identity Certificate
Chile	Passport or Seaman's Book
Denmark	Seaman's Book
Egypt, Arab Rep. of	Passport or Seaman's Book
Fiji	Passport or Seaman's Certificate of Nationality and Identity
Ghana	Passport or Seaman's Certificate of Nationality and Identity
Hong Kong	Seaman's Identity Book
India	Seaman's Identity Book
Iran	Passport or Seaman's Identity Card.
Israel	Seaman's Book
Italy	Libretto de Navigaziona
Japan	Mariners Pocket Ledger
Kenya	Passport or Seaman's Identification Certificate
Lebanon	Passport or Seaman's Identification Certificate
Malaysia	Passport or Seaman's Identity Card
Malta	Discharge Book
Nauru	Seaman's Document of Identity
New Zealand	Identity Book
Norway	Seaman's Document of Identity
Pakistan	Seaman's Identity Card or Continuous Discharge Certificate
South Africa	Seaman's Record Book and Certificate of Discharge or Seaman's Identity Certificate or Certificate of Naturalization or Identity
South Korea	Seaman's Certificate Book
Taiwan	Passport or Seaman's Book
Tanzania	Passport or Seaman's Book
United Kingdom*	Passport or Seaman's Record Book and Certificate of Discharge

*United Kingdom Passports may be held for surrender only if grantee is agreeable, otherwise an Australian Identification Card must be available.

Masters are reminded that crew members' travel documents and Commonwealth of Australia Forms M315, where applicable, are to be retained in the custody of the Master at all times and are to be produced to Customs Boarding Officers upon demand.

PILOTAGE: Pilotage is under the control of the Harbour Master and is compulsory for all overseas vessels and for Australian vessels over 6,500 g.r.t. Pilots will board vessels either by helicopter or pilot boat.

Pilot boarding by helicopter:

Requirements: (Unrestricted Operations). Allows for a beam approach and departure and landing either athwartships or fore and aft by both day or night.

1. *Touchdown Area:* An area of 4.65 m. diam. minimum or having sides not less than 4.65 m. Lateral or longitudinal slope not exceeding 1:8. No projection likely to cause damage to or restrict horizontal movement of the floats.
2. *Termination Area:* A surface of 10.15 m. diam. minimum, concentric with the Touchdown Area, which provides ground effect for the helicopter rotor system.
3. *Obstruction Free Area:* (Day) – An area of 19 m. diam. minimum concentric with the Termination Area, within which there is no projection extending more than 0.5 m. above the level of the Touchdown Area.

   (Night) – At night the Obstruction Free Area shall be 31.5 m. diam. minimum.

The approach paths to the helipad and across both sides of the ship shall be free of obstructions above hatchtop level.

At night the hatch must be well illuminated and all obstacles clearly visible.

At night a flag or pennant must be illuminated so the helicopter pilot can see the wind direction.

All crew members should be kept clear of the landing area and should not attempt to approach the helicopter unless requested to do so. When the Pilot has disembarked an officer should be available to guide the Pilot to the bridge.

Boarding by pilot vessel:

It is most important that a lee be given to allow the Pilot to board, whether the vessel be under way or at anchor. In the latter case with the anchor still down, a steady ahead movement on the engines with the helm hard over usually affords the necessary lee. Failure by the Master to afford a lee may result in the Pilot being unable to board, with consequent delay.

Vessels will be advised of Pilot Boarding and in the interest of expediency whenever required, vessels should be under way before the Pilot boards. Pilot ladders should be clean and properly constructed, fitted with spreaders to prevent turning and spacing pieces to maintain treads in a horizontal position. Manropes of 3 in. Manila should be rigged on each side of ladder and the full length thereof.

Where pilot ladders are led over bulwarks, suitable stanchions should be rigged and steps provided inboard. In addition to cleanliness of the pilot ladder on arrival, *the gangway or accommodation ladder must be washed down after completion of loading*, before the Pilot boards for departure.

Unless the ladder is satisfactorily washed down and free of ore dust, Pilot may refuse to board with resultant loss of time and expense until ladder is washed down to Pilot's satisfaction. Failure by Masters to comply with these requirements in the past in Australian ports has resulted in delays and off-hire situations in the case of time chartered vessels, heavy fines for the Master plus court costs and substantial compensation for the injured against the owners.

A boat rope is not required at this port.

Shipmaster's Report: There are well defined instructions for ships embarking Pilots by helicopter by day or night, however, the Pilot said that our ship was unsuitable for this operation owing to our corrugated hatch tops.

Boarding by boat, the Pilot requires a good lee at all times. Anchored vessels taking a Pilot should get underway before the

Pilot boards. Pilot ladders should be clean and properly constructed, fitted with spreaders to prevent turning and spacing pieces to maintain treads in a horizontal position. Manropes of 3 in. manilla should be rigged each side of the ladder and the full length thereof.

In addition to the cleanliness of the Pilot ladder on arrival, the gangway or accommodation ladder must be washed down after completion of loading, before the Pilot boards for departure.

Unless the ladder is satisfactorily washed down and free of ore dust, Pilot may refuse to board with resulting loss of time and expense until the ladder is washed down to Pilot's satisfaction. Failure by Master to comply with these requirements in the past in Australian ports has resulted in delays and off-hire situations in the case of time-chartered vessels, heavy fines for the Master plus court costs and substantial compensation for the injured against the owners.

ANCHORAGE: Vessels should anchor North of a line between Spoil Ground Buoy (flash red every 20 seconds) and No. C 6, as the area immediately North of this line is the Pilot boarding area. The bottom is sandy but the holding ground reported to be good.

A prohibited anchorage exists, bounded as follows: From No. 15 buoy (20° 14′ 46″ S. 118° 34′ 00″ E.) 309° 1.63 miles, thence 046° 2.00 miles, thence 180° 2.31 miles to No. 16 Beacon (Lat. 20° 14′ 4″ S. Long. 118° 34′ 00″ E.).

RESTRICTIONS: All Channels from seaward as far as the Swinging Basin are dredged to 11.8 m. below datum, and 183 m. wide in the straight sections, widening to 244 m. on curves. The N.W. section of Swinging Basin is dredged to 8.2 m. below datum. Total width of Basin is 600 m. Also see "Berthing".

MAX. SIZE: Max. size vessels entered: Length 1,030 ft. 183,526 M/T (d.w.t.) Draft 16.76 m. Vessels over 282 m. are handled at night. Subject to certain restrictions.

The official scale of keel clearances required for Port Hedland is as follows:

Draft of vessel	*Clearance inside harbour*	*Clearance outside harbour*
Up to 12.3 metres	1.0 metre	1.2 metres
12.3 to 12.5 metres	1.2 metres	1.5 metres
12.5 to 13.1 metres	1.2 metres	1.8 metres
13.1 metres and over	1.2 metres	2.0 metres

Arrival Draft: The Harbour Master has instructed that vessels arriving at Port Hedland should trim to 5.18 m. forward, and 6.41 m. aft for 50,000 tonners, increasing to 7.32 m. forward and 7.93 m. aft for 100,000 tonners, Other vessels should retain max. ballast and advise their draft to the Harbour Master, 24 hrs. prior to arrival.

PRATIQUE: The Quarantine Officer will board by the gangway which should be turned out and rigged ready for lowering prior to entering the harbour, Vessels should show the appropriate pratique signals whether by day or night. Only in exceptional cases at the convenience of the Health Department will vessels be boarded by the Quarantine Officer to seaward of Hunt Point. The Quarantine Officer will inspect the crew on arrival at the berth.

Vessels may be cleared at any time during the day or night subject to the Quarantine Officer being available and willing to do the clearance, and providing the Master forwards a radio message not more than 24 hrs. before arrival giving following details.

(a) The expected hour and date of arrival of the vesssel.

(b) Confirmation that the Master has individually inspected all on board within 24 hours of arrival and that there are no cases of febrile illness (high temperature or fever) or skin rashes on board.

(c) Particulars of any cases of illness on board.

(d) Confirmation that all persons on board are satisfactorily vaccinated against smallpox (i.e. vaccinated not less than eight days and not more than three years previously in the case of primary vaccination and not more than three years previously in the case of revaccination). A vaccination register, signed by the Master or individual international certificates for all crew members, must be retained on board, and all passengers should have International Certificates of Vaccination.

Vessels may proceed direct to the berth to await clearance there, subject to the requirements specified above, and providing that adequate security is provided to ensure that there is no contact between ship and shore prior to the granting of pratique. Under no circumstances must anybody be permitted to leave the vessel and have contact with shore until the vessel has been granted pratique. This also includes the Pilot. There is no objection to the Pilot, Customs and Immigration Officers boarding the vessel before the Quarantine Officer, providing they remain on board until pratique is granted.

If the Quarantine Officer is not available because of medical emergencies ashore, the vessel may be permitted to go alongside and commence loading, providing there is no physical contact between any person on the ship with the shore, until pratique is granted, excepting the special provisions made in the preceding paragraph. Rat guards are required on all mooring lines.

RADIO/VHF: Vessels trading Japan to Port Hedland use Sydney, Darwin and Broome Radio Stations. There is no Radio Station in Port Hedland. Broome Radio transmits navigation warnings including alterations to buoy positions in the approach to Port Hedland.

Vessels bound for Port Hedland should advise the Harbour Master 48 hours and 24 hours before their arrival, indicating their draft, fore and aft, and last port. A continuous watch is kept in the Port Shipping Control Tower, which is fitted with VHF, and vessels should call "Port Hedland Harbour" on Channel 16, 2 hours before arrival at anchorage to confirm their ETA and in order that they may be kept acquainted with berthing instructions and the movement of other vessels. The Tower will also assist ships by giving them their bearing and distance by radar from the Tower. No ship may enter the dredged channel or depart from any berth without permission from Port Control. Signals will be exhibited from the Tower at night to indicate if the port is closed and the state of the tide. The height of tide is no longer indicated, but such information is available and will be transmitted to vessels by VHF or Aldis upon request.

Vessels equipped with VHF should guard Channel 16 (156.8 Mc/s) when in range of Port Hedland, and also whilst at anchor. This channel is in direct communication 24 hours a day with Port Control (call sign "Port Hedland Harbour") and will avoid superfluous launch trips to advise Masters of changing conditions. Visual signals may be used in addition to a constant VHF watch. Should the Master of a vessel at anchor wish to communicate by VHF with another vessel, then he must first advise "Port Hedland Harbour" who will allot him a working channel.

TUGS: Six tugs, each of 2,400 h.p., are available. Line-running launches and ferries are also available. Two small tugs of about 350 h.p. are also available.

BERTHING: (Due to the tidal range and strength of current, ships over 20,000 d.w.t. do not sail on the ebb tide). Vessels usually berth close to low or high slack water.

Note: As a general rule –

(a) Vessels of less than 20,000 tonnes d.w.t. may sail on an ebb tide with range of less than 4.9 m.

(b) Vessels of less than 10,000 tonnes d.w.t. may sail on an ebb tide with range of less than 5.8 m.

(c) Vessels of less than 5,000 tonnes d.w.t. may sail at anytime.

Goldsworthy Pier: This is situated on the Western side of the Harbour on Finucane Island, and lies S.W. of Hunt Point Beacon (No. 29). The face of the jetty extends over a distance of 177 m. and lies in the line 017–197° (T) and consists of six breasting dolphins, each of which has a floating fender unit. There are two dolphins ahead and astern of the jetty to facilitate the mooring of vessels. These dolphins are set back from the line of the berth face and have no fenders.

The distance from the No. 1 or North Dolphin to the No. 10 or South Dolphin is a total of 378 m. and the dredged mooring basin 366 m. long, 61 m. wide, has a depth of 15.85 m. below datum. The shiploader has an overall length of travel of 180 m. and a max. capacity of 4,500 t.p.h.

Fresh water and fuel are not available at this berth.

Vessels will normally berth port side to, heading out to sea. Ship's gangways should be rigged prior to berthing on the off-side as gangways are not acceptable on the jetty. A launch service is available to ferry personnel to the town. Ship's personnel are not allowed on the loading facility. Provision for a future second loading berth ahead of the existing jetty has been made.

The height of the shiploader underside in the raised portion above chart datum is 24.1 m. The loader is not completely retractable behind the berth face but retracts to a position 0.84 m. behind the fender line.

No. 1 Berth. This landbacked berth lies in a 350° – 170° direction and has a length of 213 m., with a mooring dolphin 58 m. from the Northern end. Depth alongside is 11.2 m. A dry cargo storage shed adjacent to the berth has a floor area of 5,300 sq. ft. and general cargo will be handled by fork lift vehicles to and from the vessel. Provision for tanker berthing. Provision for heavy lift crane/and/or bulk handling installation in the future.

Stack load on berth 3,418 kg/m². Fork lift capacity 27.2 m/t. Max. axle loading 8 tonnes on dual axle. Raykin fender system.

Oil fuel, fresh water and telephone are available at the berth.

Cargo is handled by fork lifts and/or road trucks to a cargo receival shed a short distance away. The berth is equipped to receive bulk fuel. Limited grades of bunkers and fresh water are available. Fresh water can be supplied at the rate of 35 t.p.h., and bunkers at 80 t.p.h. Amounts of 200 tons of water are always available, and vessels requiring more than this are requested to give at least 48 hours prior notice, through their Agents.

No. 2 Berth has been demolished. There are plans for replacing it at a future date.

A pipe-line for loading bulk drilled mud is fitted and is operated by a private company. This is located at the South end of No. 1 Berth.

No. 3 Berth: No. 3 Berth is situated to the South of Mangrove Point and runs in a 117° – 297° (T) direction for a distance of 183 m., with dolphins 46 m. ahead and astern to facilitate the mooring of vessels. There is a mooring basin 274 m. in length dredged to 11.20 m. below datum alongside the berth and dolphins.

Cargo is handled by form truck into the sheds or storage area at the rear of the shed, or loading direct into road truck. The full length of the wharf is protected by a fender system.

A mechanical bulk-loading facility is operated by the Leslie Salt Company on this wharf. The loader has a capacity of 1,500 t.p.h.

Fresh water is available at normal rates of 35 t.p.h. Bunkers can be obtained at rate of 100 t.p.h. Provisions for tanker berth.

Mount Newman Piers A and B: These two berths form a continuous line running in a 117° – 297° (T) direction from a position immediately South of No. 3 Berth towards Nelson Point. Pier A is the Northward berth and extends for a distance of 305 m., the depth alongside being 17.29 m. Pier B, the Southward berth, has a length of 353 m. and is dredged to a depth of 16.07 m. below datum.

The two shiploaders are fully retractable and have an average capacity of 6,000 t.p.h. each. No. 1 loader, at "B" Berth, has a boom reach of 28 m. from the wharf face, and the height of the underside of the loader is 24.5 m. above datum. Loader No. 2, "A" Berth, has a boom reach of 29.6 m. and a height above datum of 27.5 m. Vessels will normally swing on entry and berth starboard side to on these berths. Starboard gangways should be rigged prior to arrival so that no delay is incurred in the boarding of Quarantine and Customs Officials on berthing.

Bunkers are not available on these berths.

MEDICAL: Medical attention may be arranged through the Agent. No person will be attended unless he is provided with a letter from the Master authorising such treatment. All charges incurred will be charged to the vessel.

TANKERS: *Connections:* Ten-inch lines with 8 in. flexible hoses. Discharge rates depend on grade and consignee.

Local Installations: Mobil, Shell, B.P., Caltex and Ampol.

DENSITY: Average 1026.

REPAIRS: Minor repairs only can be effected. Radio and radar technicians, electricians, plumbers, welders and divers are available. There are a number of machine shops and a foundry is being constructed. Sand-blasting equipment and fumigation facilities are available.

AIRPORT: Daily jet flights to Perth and regular services to Darwin are available. In addition, there are several small charter planes available. Airport 7 miles from port.

CONSULS: At present, there is no Consular representation at Port Hedland.

TIME: GMT plus 8 hours.

SURVEYORS: Department of Transport Surveyor, Captain J. Cook. Tel. 732598 (also acts as Shipping Master). Classification societies situated in Perth.

POLICE/AMBULANCE/FIRE: Police 731444; Ambulance 731800; Fire 731222; Hospital 732144.

CARGO GEAR: Ship's gear used. Mobile cranes up to 31 tons capacity may be hired. Crane of 120 tons capacity owned by Mount Newman Co. Fork lifts of 4,000 lb., 8,000 lb. and 10,000 lb. available.

CERTIFICATES: The following documents should be available for inspection:

Ship's papers, including the following certificates:
- *(a)* Register.
- *(b)* Load Line.
- *(c)* Safety Equipment.
- *(d)* Safety Radio.
- *(e)* Safety Construction.
- *(f)* Australian Light Dues Receipt.
- *(g)* Articles of Agreement and Account of the Crew (or equivalent).
- *(h)* Oil Record Book.
- *(i)* Register of Cargo Gear.
- *(j)* Gas Free Certificates for Obo's.
- *(k)* Western Australian Conservancy Dues Receipt (Port Bill).

Valid Deratisation or Exemption Certificate.

Crew's Identity Documents.

International Vaccination Certificates of all persons aboard as well as crew list giving vaccination dates.

STOWAGE FACTORS: Basis most recent experience, stowage factors of iron ore cargoes loaded at Port Hedland have been approximately as follows, per ton of 2,240 pounds: Lump ore approx. 15 cu. ft. Fines approx. 13 cu. ft.

However, as these factors sometimes vary from cargo to cargo, it is recommended that Masters check with loading Agents for each shipment before finalising stowage plans,

GENERAL: If the Master wishes to anchor outside prior to proceeding to sea, he must advise the Pilot when leaving the berth, and the Pilot will advise suitable anchorage. The Master will advise the Pilot of estimated time of departure in order that this may be reported to the Port Control.

DELAYS: Delays of port operations, including delays of other vessels waiting for berth, caused by a vessel which for any reason is not prepared and able to move from the berth when so ordered, are chargeable to the vessel which causes such delays.

STORES: Ship Providores, Elder Smith Goldsborough Mort Ltd. of Port Hedland, were able to provide a varied and comprehensive service, particularly in catering stores. Despite the fact that most foodstuffs have to come 1,000 miles from Perth, this firm have large storage and refrigeration facilities in Port Hedland and have no difficulty in satisfying most ships' requirements, particularly dry stores and refrigerated meats and fish. The only difficulty is with Muslim killed meats, in order to fulfil any orders for this commodity they require seven day's notice, as the meat has to be ordered from Perth. All other stores can be ordered after berthing.

AUTHORITY: Port Hedland Port Authority.

AGENT: Sub-agents of Patrick Agencies, Fremantle.

PORT KEMBLA, N.S.W.: 34.28 S. 150.54 E.

(See Plan Book)

PORT LIMITS: In the absence of any specific clause in the Charter Party, the local custom is that a vessel, having obtained pratique, is considered to be an "arrived ship" when it is anchored off the port.

CERTIFICATES/DOCUMENTS/HEALTH/CUSTOMS ALLOWANCES/CARGO GEAR: See "Melbourne".

PILOTAGE: Pilotage is compulsory for all foreign vessels and Australian Masters without an exemption; this service operates 24 hours per day. When entering or leaving the Inner Harbour, the Pilot requires 3 ft. clearance under the keel, vessels over 244 m., 1.4 m. required. Pilots equipped with VHF.

The pilot boarding station is off the Wollongong Head Light House, – distance 1.25 miles from Harbour entrance.

RESTRICTIONS: An artificial harbour, formed by two breakwaters with an entrance of 305 m. and a depth of 16.75 m. ISLW at the entrance. Leading from the Outer Harbour there is an inner harbour basin, which is entered through a 165 m. wide Channel, having a depth of 15.25 m. ISLW. The port consists of two harbours, locally referred to as the Outer Harbour and the Inner Harbour. In the Outer Harbour the swinging basin is approximately 457.2 m. with a min. depth of 10.70 m., and in the Inner harbour the swinging basin is approximately 365 m. with a min. depth of 13 m.

MAX. SIZE: The deepening project at Port Kembla has been completed and the Port can now handle vessels in the 100,000 d.w.t. range for ore discharge. The depths are now as follows:

Entrance Channel 15.25 m. ISLW.

Iron ore discharge berths:

No. 1 Depth alongside 13 m. ISLW.

No. 2 Depth alongside 15.75 m. ISLW.

The Harbour Master advises that vessels are be able to operate with a maximum load draft of 14.8 m.

PRATIQUE: Quarantine service is available 24 hours a day with all vessels being granted pratique alongside the berth.

RADIO: A continuously manned communication centre maintains constant contact with the Pilot, pilot tender, tugs and launches. In addition, a VHF radio-telephone system (operated by the Central Control Point in Sydney) provides communication for vessels at sea or under the control of a Pilot.

Whilst anchored off the port of Port Kembla, it is necessary to maintain radio watches, as officially a vessel is at sea until entering the breakwaters into the port.

TUGS: At the present time four tugs are available, 24 hours per day, provided previous notification is given.

The tugs have bollard pulls ranging from 42 to 17.5 tons.

BERTHING: Outer Harbour:

No. 2 Jetty – South side: bulk discharging berth for Australian Iron and Steel Pty Limited, exclusively for ironstone, limestone and other raw materials used in the manufacture of steel. Depth of water alongside, 9.75 m.

No. 3 Jetty – General Cargo Berth: depth of water ranging from 11 m. seaward end to 3.7 m. shore end.

No. 4 Jetty – General Cargo Berth: depth of water ranging from 10 m. seaward end to 4.5 m. shore end.

No. 5 Jetty – Used exclusively for the discharge of bulk petroleum products. It is situated on the southernside of the breakwater, and can accommodate vessels up to 183 m. length, depth alongside 10.67 m. This berth is also used for bunkering however, no priority is given for bunkering ships over tankers.

No. 6 Jetty – General Cargo Berth: depth of water ranging from 9.8 m. seaward end to 7.3 m. shore end.

Inner Harbour: Four of the six wharves in the Inner Harbour are privately owned, three by the Australian Iron & Steel Pty Limited and one by Australian National Line.

AIS No. 1 Loading Berth – depth 11 m.

AIS Discharge Berth – this berth is serviced by two 15-ton capacity grabs capable of 500 t.p.h. each, and has both road and rail transport. It is actually a continuation of the loading berth and also has one coal/coke loader, capable of a loading rate of 600 t.p.h.

AIS No. 2 Loading Berth – depth alongside 12.2 m.

Roll-on/roll-off Berth – depth alongside 9.2 m.

Coal Berth – length of berth 215 m. The coal or coke is loaded by means of a travelling gantry, with trimmer. The unit has been designed for a loading rate of 2,000 tons of coal or 800 tons of coke per hour, and the trimmer for loading vessels to 110 ft. beam. The average rate is approximately 1,250 tons coal and 550 tons coke per hour. The loading boom (in the horizontal position) and loading chutes will clear the hatch coaming at 17.37 m. above ISLW. Also see "Developments".

Multi-purpose Berth – can accommodate vessels up to 220 m. length, depth alongside is 11.6 m.

TANKERS: Max. size of vessel 183 m. length, 11.6 m. draft.

DENSITY: Average 1025.

STEVEDORES: The Stevedoring Employers of Australia Ltd. controls labour in the port, the present total strength being 354 men.

Working times:

1st shift: 0730 to 1430 hrs. – Monday to Friday, Sunday
2nd shift: 1500 to 2200 hrs. – Monday to Friday, Sunday
3rd shift: 2300 to 0600 hrs. – Monday to Friday, Sunday
1st shift: 0730 to 1130 hrs. – Saturday only
or: 0730 to 1430 hrs. – Saturday only.

There are sufficient forklifts, tractors, bulldozers, etc., available to handle all general and bulk cargoes as necessary.

FRESH WATER: Fresh water is available at all berths.

FUEL: Furnace and diesel oil is obtainable by pipe-line at the inflammable liquid berth and No. 6 Jetty and also at the AIS discharge berth and AIS No. 1 loading berth. Limited quantities are available by road tanker at No. 3 jetty, the coal loading berth and the multi purpose berth. No bunkering barges are available.

Delivery capacity by pipe-line is approx. 120 t.p.h. Delivery capacity by road tanker is approximately 20 t.p.h.

MEDICAL: There are sufficient doctors, dentists, etc., to handle all eventualities; also two well equipped modern hospitals.

REPAIRS: There are no drydocking facilities, but several marine engineering companies operate here, who can handle most types of repairs.

HOLIDAYS: See "Sydney".

GANGWAY/DECK WATCHMEN: Carried out by Shore Watchmen.

OPENING/CLOSING HATCHES: Crew/stevedores.

CREW IDENTIFICATION: See "Melbourne".
TIME: GMT plus 10 hours.
AIRPORT: Kingsford Smith International Airport, Sydney.
DEVELOPMENTS: Inshore loader proposed to accommodate 125,000 tonne vessels. No decision yet reached.
TELEPHONES: Pilot station 740761; Signal station 744571 Telephones available.
AUTHORITY: Maritime Services Board of NSW.
AGENT: Patrick Agencies, Foreshore Road, P.O. Box 83, Port Kembla, N.S.W. 2505. Cables "Rikpat". Tel. 74-2267 and 74-1637. Telex AA 29025.

PORT LATTA, Tasmania: 40.51 S. 145.23 E.

DOCUMENTS:
4 Crew Lists, Commonwealth No. MS11.
1 Customs Store List, Commonwealth No. 42A.
1 Personnel Effects, Commonwealth No. 5.
1 Quarantine/Animals, Commonwealth No. QA4 and QA5.
1 Smallpox Vaccination Register.

PILOTAGE: Compulsory pilotage from anchorage to berth. Pilot remains on board throughout loading. Pilot station equipped VHF radio Channels 16, 12 and 6. Pilots and line boats stationed at small boat harbour, Port Latta. Pilot boards at anchorage. Vessels communicate with Port Latta Marine Department on normal ship-shore frequencies, through Australian coastal stations, addressing message to "Pickands Burnie" prefixed "Shipserv". ETA required 10 days, 2 days, 1 day prior. Accommodation ladder to be rigged and ready on port side.

ANCHORAGE: 1 mile radius from point with Rocky Cape Light. Bearing 130° (T) × 5 miles (16 fthms).

RESTRICTIONS: Vessels berth on arrival day or night, weather permitting. Approach channel and depth alongside berth 50 ft.

MAX. SIZE: Length, 900 ft. LOA; beam 130 ft.; draft 50 ft.; 9 ft. range of tide. Greater draft by prior arrangement.

HEALTH: Commonwealth appointed Quarantine Officer will board on arrival, weather permitting. Quarantine Officer requires 1 copy Crew List and 1 copy Smallpox Vaccination Register. Doctor boards only when Port Latta first port of call.

RADIO: Radio messages addressed to "Shipserv. Pickands, Burnie" and Agent.

TUG: Will join vessel at anchorage. Tug stationed at Port of Stanley and will stay with vessel throughout loading. The use of tug or ship line is at discretion of Pilot. No extra charge made for use of tug lines.

BERTHING: Vessels berth either side alongside using anchor. Lines required: Six 120 fathom lines and one wire backspring at each end of vessel. 1 berth where vessel moors to buoys and alongside 2 dolphins. A 6,000 ft. long steel structure carries ore conveyor to 2 ship loaders each protected by a dolphin.

Minimum depth of water in berth and approaches 50 ft. (15.24 m.).

MEDICAL: Minimum of 24 hours notice required by Agent to arrange doctor. Hospitals situated at Smithton, 19 miles; Wynyard, 25 miles.

TANKERS: Berth at anytime. Hose 10 in. diameter, discharge line only, no facilities for receiving ballast or slops. Maximum permitted draft 45 ft.

DENSITY: 1025.
FRESH WATER: Limited quantity from tug – 70 tons.
FUEL: Not available.
FIRE REGULATIONS: Standard Mines Department fire regulations.
OPENING/CLOSING HATCHES: Ship's responsibility.
CERTIFICATES: Required: De-rat., Safety Equipment, Load Line, Registered Tonnage.
CUSTOMS ALLOWANCES: Tobacco, 200 cigarettes or 8 ozs. tobacco per man. Wine/Spirit, 1 quart per man, bottle/bottles must be unsealed.
CARGO GEAR: None required.
IDENTIFICATION CARDS: See "Melbourne".
CONSULS: No consulates.
REPAIRS: Minor repairs can be carried out by local contractors.
REPATRIATION: Agents can arrange repatriation and crew changes.
AIRPORT: Nearest airport 25 miles at Wynyard with daily domestic flights to mainland for international flight connections.
TIME: Local time on Eastern Australian Standard. GMT plus 10 hours. Tasmanian Summer exists between October and March, GMT plus 11 hours.
HOLIDAYS: Cargo loading continuous throughout public holidays.
POLICE/AMBULANCE/FIRE: Police, Stanley 581104; Ambulance, Smithton 521221; Fire, Stanley 581202.
TELEPHONES: No arrangements available for placing phone on board ship. Use of company phone can be arranged for business matters.
SHORE LEAVE: Shore leave is allowed provided sufficient crew remain on board to handle vessel for clearing berth.
AUTHORITY: Port Latta Marine Department.
AGENT: Sub-agent of Patrick Agencies, Melbourne.

PORT LINCOLN, S.A.: 34.42 S. 135.50 E. (See Plan Book)

DOCUMENTS: See "Melbourne".
PILOTAGE: Compulsory. Pilot boards 1.5 miles South-east or East-south-east of Boston Point.
APPROACHES: Depth in approach Channel 30 ft.
TUGS: 1 tug available.
VHF: Radio telephone in operation.
BERTHING: Kirton Point Jetty oil tanker berth at "T" head, berthing space 900 ft. (275 m.), depth 32 ft. (9.75 m.). Shipping pier depth 27 ft. (8.2 m.) and 28 ft. (8.5 m.).

A new bulk grain loading jetty has been built, 660 m. long, depth 15 m., with two travelling loaders with combined capacity of 4,000 tonnes an hour and an outreach of up to 35.5 m. on each side of jetty. Vessels up to 60,000 d.w.t. can be accommodated.

A new berth, 247 m. long, depth 12 m. to accommodate vessels discharging phosphate rock has also been completed.

Broken Hill Jetty (Proper Bay) jetty and berth with mooring dolphins. Distance between outer dolphins 882 ft. (270 m.). Depth 34 ft. (10.4 m.) MLWS. Loading rate 1,900/2,000 t.p.h. Max. beam permissible 80 ft. (24 m.).

FUEL: Not available.
FRESH WATER: Available at jetty and shipping pier. Not available at Broken Hill (Proper Bay) berth.
AIRPORT: There is a scheduled one hour air service to Adelaide with up to four flights a day.
AUTHORITY: Department of Marine and Harbours, Adelaide. For Proper Bay: Broken Hill Proprietary Co. Ltd.
AGENT: See "Adelaide".

PORT PIRIE, S.A.: 33.11 S. 138.01 E. (See Plan Book)

CERTIFICATES/DOCUMENTS/HEALTH: See "Melbourne".
PILOTAGE: Compulsory. The Pilot Boarding Station is South-West to West and within 3 miles of Eastern Shoal North Beacon.

The regulation pilot ladder should be secured so that the lowest step is 1.22 m. clear of the water. Manropes must be provided but a boat rope is *not* required.

Pilotage distance is 17 miles and time occupied is approximately 2 hours.

ANCHORAGE: Vessels awaiting a Pilot should anchor near the Pilot Boarding Station which is good holding ground.

Exempt vessels may anchor within Germein Bay. However, anchorage near Cockle Spit is not recommended for vessels of light draft under adverse weather conditions.

RESTRICTIONS/MAX. SIZE:

Column		*Minimum Keel Clearance*
1	Up to 21.33 m. (70 ft.) beam	0.6 m. (2 ft. 0 ins.)
2	From 21.33 m. to 22.25 m. (70 ft. to 73 ft.) beam	0.76 m. (2 ft. 6 ins.)
3	Over 22.25 m. (73 ft.) beam	0.91 m. (3 ft. 0 ins.)
4	10% of draft	0.6 m. (2 ft. 0 ins.)

Predicted height of tide	Depth in Channel	1	2	3	4
	m. ft. ins.	m. ft. ins.	m. ft. ins.	m. ft. ins.	m. ft. ins.
		0.6 (2 0)	0.76 (2 6)	0.91 (3 0)	10%
0.0	6.4 (21 0)	5.5	5.3	5.2	5.5
0.1	6.5	5.6	5.4	5.3	5.6
0.2	6.6	5.7	5.5	5.4	5.7
0.3	6.7	5.8	5.6	5.5	5.8
0.4	6.8	5.9	5.7	5.6	5.9
0.5	6.9	6.0	5.8	5.7	6.0
0.6	7.0 (23 0)	6.1 (20 0)	5.9 (19 6)	5.8 (19 0)	6.1 (20 0)
0.7	7.1	6.2	6.0	5.9	6.2
0.8	7.2	6.3	6.1	6.0	6.3
0.9	7.3	6.4	6.2	6.1	6.4
1.0	7.4	6.5	6.3	6.2	—
1.1	7.5 (24 7)	6.6 (21 8)	6.4 (21 0)	6.3 (20 8)	6.5 (21 5)
1.2	7.6	6.7	6.5	6.4	6.6
1.3	7.7	6.8	6.6	6.5	6.7
1.4	7.8	6.9	6.7	6.6	6.8
1.5	7.9	7.0	6.8	6.7	6.9
1.6	8.0 (26 3)	7.1 (23 3.5)	6.9 (22 8)	6.8 (22 4)	7.0 (22 11)
1.7	8.1	7.2	7.0	6.9	7.1
1.8	8.2	7.3	7.1	7.0	7.2
1.9	8.3	7.4	7.2	7.1	7.3
2.0	8.4	7.5	7.3	7.2	—
2.1	8.5 (27 11)	7.6 (24 11)	7.4 (24 4)	7.3 (24 0)	7.4 (24 5)
2.2	8.6	7.7	7.5	7.4	7.5
2.3	8.7	7.8	7.6	7.5	7.6
2.4	8.8	7.9	7.7	7.6	7.7
2.5	8.9	8.0	7.8	7.7	7.8
2.6	9.0 (29 6)	8.1 (26 7)	7.9 (25 11)	7.8 (25 7)	7.9 (25 10)
2.7	9.1	8.2	8.0	7.9	8.0
2.8	9.2	8.3	8.1	8.0	8.1
2.9	9.3	8.4	8.2	8.1	8.2
3.0	9.4	8.5	8.3	8.2	8.3
3.1	9.5 (31 2)	8.6 (28 3)	8.4 (27 7)	8.3 (27 3)	8.4 (27 5)
3.2	9.6	8.7	8.5	8.4	8.5
3.3	9.7	8.8	8.6	8.5	8.6
3.4	9.8	8.9	8.7	8.6	8.7
3.5	9.9 (32 6)	9.0 (29 6)	8.8 (28 11)	8.7 (28 6.5)	8.8 (28 11)

Daylight: Max. length 178.30 m. (585 ft.) OA } i.e. Port Limits
,, beam 25.92 m. (85 ft.) OA }
At Night: Max. length 167.63 m. (550 ft.) OA
(Out only) Conventional vessels only i.e. Bridge amidships
,, ,, length 167.63 m. (550 ft.) OA
Bulk Carriers i.e. Bridge aft.

Vessels are *NOT* piloted inwards or swung at night. Vessels over 167.63 m. (550 ft.) OA are swung only when No. 6 Berth is vacant.

The entrance channel and harbour is dredged to 6.4 m. LWOST. The minimum keel clearance of any vessel proceeding in the harbour or channel should be 0.61 m. For vessels with a beam in excess of 21.33 m. the minimum keel clearance should be 0.76 m. and vessels over 22.25 m. the minimum keel clearance should be 0.91 m.

Vessels have sailed from the port under suitable tidal conditions with drafts in excess of 8.23 m.

Port Pirie Channel Information: The table shows the *maximum* depths to which vessels may load when the sailing or berthing time is 2 hrs. before HW (i.e. allowing 0.3 m. (1 ft.) rise of tide) and to provide the following keel clearances.

N.B. Berthing time means the Pilot boarding time at Eastern Shoal North.

Note 1: It is recommended that the maximum draft shown on the table should be *decreased* by 0.15 m. (6 ins.) when "fixing" vessels in advance, to allow for possibility of the tide being less than that predicted due to weather conditions.

Note 2: The LW heights should be considered when fixing deep vessels to ensure that the vessel always remains afloat in the berth.

RADIO/VHF: Port Pirie is serviced by VHF R/T Channels 16, 12 and 6. "Pirie Harbour" maintains an almost continuous watch on Channel 16. Vessels entering the port should advise "Pirie Harbour", as soon as contact can be established, of their ETA and draft, also the position anchored, if applicable. Exempt vessels should advise when ready to depart.

There is no visual signal station.

There is no radio telegraph station at Port Pirie. All such messages are handled through "V.I.A." Adelaide and are forwarded to or from Port Pirie by land-line.

TUGS: Tug will be required for vessels of 410 ft. (125 m.) and over.

BERTHING: Vessels are normally berthed in the order of first arrival at the Pilot Boarding Station and are usually swung prior to berthing.

Main engines must not be immobilised and static engine tests must not be made without prior approval of the Harbour Master.

Berths: Vessels berthed at No. 1 should not exceed 152.40 m. (500 ft.) OA length.

At Berths Nos. 2, 3, 5, 6, 7, 8, 9 and 10 the OA length limit of 178.30 m. (585 ft.) applies, provided adequate berthing space is available.

Berth No.	Depth m.	Depth ft.	Width m.	Width ft.	Length m.	Length ft.	Normal usage
			Dredged to:				
1	7.32	24	24.38	80	152.40	500	General
2	8.23	27	30.48	100	182.89	600	Silo-Bulk Grain
3	7.32	24	30.48	100	198.13	650	Tankers
4	5.79	19	—	—	106.68	350	Tugs & Launches
5	8.23	27	30.48	100	198.13	650	Concentrates – Overseas
6	8.23	27	30.48	100	182.89	600	Concentrates – Overseas
7	8.23	27	30.48	100	144.79	475	Concentrates – Interstate
8	8.23	27	30.48	100	179.84	590	Lead & Zinc Pigs
9	8.23	27	30.48	100	179.84	590	Lead & Zinc Pigs*
10	8.23	27	30.48	100	158.51	520	Coke, Coal and Limesand*
11	3.15	10	24.38	80	47.71	150	Acid

*Fuel Oil can be discharged at these berths, for B.H.A.S.

CRANES: Eight 7.5 ton electric cranes are available as under:—
No. 7 Berth – 2 for concentrate loading (Interstate only).
Nos. 8 and 9 and 10 berths – 6 plus the 2 from No. 7 if not required at that berth.

Two 7.5 ton cranes situated at No. 7 Berth are the property of E.Z. Company and the balance of the 7.5 ton cranes are the property of B.H. Associated Smelters and can only be procured when they are not required by the Company or when it is stipulated in contract, agreement or Charter, that cranes to be supplied.

BULK HANDLING FACILITIES: The boom of the shiploader is 70 ft. (21.3 m.) in length and when lowered to the horizontal position for pouring should plumb the midship line of most ships loading from this machine. The "jet-trimming slinger" at the lower end of the loading chute is capable of throwing a stream of ore some 60 ft. (18.3 m.) through 360 degrees and can be directed to any position within the vessel's hold.

Bulk wheat and barley can be delivered ex-silo on a conveyor belt which is capable of delivery at the rate of 400 t.p.h. Five outlets are available but the maximum is 400 t.p.h.

FRESH WATER: Fresh water available all berths at rate of approx. 15 t.p.h.

FUEL: There are no bunkering facilities at any berth. Limited quantities of diesel oil may be obtained by road tanker.

TIME: Local time is Central Standard Time, GMT plus 9.5 hrs.

TIDES: MHW Springs 2.65 m., Neaps 1.65 m. Generally tidal heights of 2.74 m. or over occur at Springs about 50% of the days of the year. However, tides are affected by weather and may be up to 0.61 m. above or below predictions.

REPAIRS: Subject special arrangements.

TELEPHONES: Police 32 1200; Fire Department 32 3000; Harbour Master 32 1455.

AUTHORITY: Harbour Master, Port Pirie. Department of Marine and Harbours, Adelaide.

AGENT: Patrick Agencies, POB 38, 15 David Street, Port Pirie. S.A. 5540. Tel. 32 3222. Cables: "Rikpat".

PORT STANVAC, S.A.: 35.06 S. 138.28 E. (See Plan Book)

DOCUMENTS: The following Australian forms are required at first port of call. If not on board, they must be completed on arrival:

2	copies Form	M & S 11 or M & S 14 (Crew List).
1	,, ,,	42 A (Store List).
1	,, ,,	5 (Customs Manifest).
2	,, ,,	C & E 886 (Ports of Call).
1	,, ,,	QA 3 (Cargo).
1	,, ,,	QA 4 (Pets).
1	,, ,,	QA 5 (not necessary if no pets on board).
2	,, ,,	FQ 360 (Health Report).

PILOTAGE: Compulsory. Mooring Master acts as Pilot. On approaching port, contact Port Stanvac Information Station on VHF Channel 16, day or night, for latest orders.

Pilot ladders must comply with IMCO/SOLAS requirements or Pilot may refuse to board – ALL VESSELS.

Crude Carriers only. Accommodation ladder required to be rigged on the starboard side.

RESTRICTIONS: Approaches from the West, through Investigator Strait; from the East, through Backstairs Passage.

Minimum depth in channel to jetty berth is 40 ft. (12.2 m.). Minimum depth in Channel to Sea Line berth is 60 ft. (18.3 m.).

Height of tide, 9.0 ft. (2.7 m.) HHW, and 4.6 ft. (1.4 m.) LHW.

ANCHORAGE: Crude vessels — with Marino Rocks Lighthouse 065° distance 3.5 miles in 14 fathoms of water.

Product vessels – with Marino Rocks Lighthouse 065° distance 3 miles in 11 fathoms of water.

Not recommended anchor West of sea berth due to presence of sunken barges, although deep water.

MAX. SIZE: At Jetty berth: length 560 ft. (170 m.), draft 32 ft. (9.7 m.).

At Sea Line berth: length 1,000 ft. (305 m.), draft 51 ft. (15.5 m).

RADIO: VHF radio telephone Channels 16, 14 and 9. Call sign "PORT STANVAC". Mooring Master in radio contact with terminal while at berth.

TUGS: Obtainable from Port Adelaide. Normally 1 tug assists berthing.

BERTHING: Jetty extends over a stone causeway and thence north-westward for about 2,000 ft. (610 m.). Causeway is about 1,000 ft. (305 m.) long. The "L" head of the jetty is about 400 ft. (122 m.) long in a N.E. direction, with a depth of 35 ft. (10.7 m.) alongside.

A pipe-line extends about 1,800 ft. (548 m.) from the jetty head in a N.W. direction to the Sea Line berth in a depth of 60 ft. (18.3 m.) of water. At the Sea Line berth vessel moors using both anchors and ship's ropes to 5 buoys aft. In addition, up to 5.5 in. (0.139 m.) wires may be picked up from the sea bed. Use of these wires is recommended as vessel is moored beam on to tidal streams. After westerly storms, berth is exposed to heavy swell.

HOSES: Sea Line berth; two 12 in. (0.3048 m.) hoses connect vessel with 34 in. sea line. A shore gang of fitters joins ship to connect hoses under Berthing Master's supervision. These men are accommodated on board.

Ship's port derrick to be rigged with a single runner. Diver goes under water to connect hose.

Shore tanks situated 120 ft. (36.5 m.) above sea-level, high back pressure to be expected.

FRESH WATER: Fresh water available at the Products Wharf only, at an approximate rate of 25 t.p.h.

FUEL: Fuel and diesel oil available at jetty. Only Bunker "C" available at Sea Line berth.

MEDICAL: Doctor available.

REPAIRS: No facilities for repairs.

TIME: GMT plus 9.5 hours. Daylight saving time – GMT + 10.5 hrs. usually from last Sunday in October to first Sunday in March.

BALLAST: Facilities available to receive 12,000 L/T dirty ballast ashore from Product Wharf only.

POLLUTION: No dirty ballast or bilges may be pumped overboard. A maximum penalty for pollution of local waters is $A50,000 plus cost of any cleaning necessary.

REGULATIONS: This Terminal is in an open exposed roadstead. During the time a vessel is berthed at the Terminal, the ship's engines and propulsion machinery should be maintained in readiness to leave the berth under full power at short notice. No repairs which would interfere with this requirement are permitted.

SHORE LEAVE: Allowed. Launch service can be arranged. Crew members not allowed through refinery on foot, must use taxi or approved transport.

SHIPMASTERS REPORT: (1976).

Anchorage: Crude tankers normally in position, Marino Light bearing 075°T, distance 3.5 miles.

Moorings: 6 ship's ropes to Buoy No's 1-6 plus a minimum of 4 wires from buoys to ship. Carpenter's stoppers for wires provided by shore.

Hoses: Shore gang connects hoses under supervision of Mooring Master. Ship's crew handle winches. 1 officer to be present. Shore gang is not accommodated on board.

Time: GMT plus 9.5 hours but daylight saving time (plus 10.5 hours) is kept from last Sunday in October until first Sunday in March.
AUTHORITY: Petroleum Refineries (Australia) Pty. Ltd.

AGENT: See "Adelaide".

PORT WALCOTT, W.A.: 20.37 S. 117.11 E. Including Cossack and Point Samson (defunct), Cape Lambert (operational) and Dixon Island (possible future) (See Plan Book)

PORT LIMITS: Bounded on the South and on the West by the sea-coast westward from the mouth of the Sherlock River to the North end of Dolphin Island, including all the intermediate bays, creeks, coves, inlets and navigable waters; on the North by lines extending from the North end of Dolphin Island to the South end of Legendre Island and thence to the North end of Delambre Island and then South-Easterly to the North end of the East boundary herein next described:– and on the East by a straight line extending 5 statute miles true North from the mouth of the Sherlock River aforesaid.

The port limit line is also the 'Quarantine Line'. Permission from Port Health must be obtained prior to crossing this line. Ships 'arrive' when crossing port limit line, when Pilot boards or when anchored.

Area is covered by Decca Channel 8E. Charts AUS.55 L(D8), 740L(D4D8) and 326 L(D4D8).
DOCUMENTS: See "Melbourne".
PILOTAGE: Pilotage is compulsory. Pilots resident at Wickham. 24 hours service.

Pilot Ladders, Hoists, etc: On arrival, Pilots will accept a pilot hoist, a pilot ladder not exceeding 9 m. in length, an accommodation ladder if the weather is suitable or a combination of pilot ladder and accommodation ladder.

Owing to swell conditions, a clean pilot ladder is required for departure. This should be rigged so that it is 1 m. above sea level and provided with 2 clean manropes.

This ladder is required to comply with Australian Standard Specification No. 1267 of 1975 which is based on the requirements of the SOLAS Convention and the Navigation Act.

A pilot hoist or accommodation ladder is *not* considered suitable for disembarking.

Whilst in the berth, the appropriate accommodation ladder is used for access to the ship.
ANCHORAGE:
Suggested anchorage positions:
Bearings of Jarman Island Lighthouse.

'A'	185°×5.5 miles	depth 11 m.
'B'	190°×6.0 miles	depth 12 m.
'C'	195°×6.5 miles	depth 14 m.
'D'	190°×7.0 miles	depth 14 m.
'E'	195°×7.5 miles	depth 15 m.
'F'	175°×6.5 miles	depth 13 m.
'G'	180°×7.0 miles	depth 14 m.
'H'	185°×7.5 miles	depth 15 m.
'J'	175°×7.5 miles	depth 16 m.
'K'	180°×8.0 miles	depth 15 m.

TIDES: Spring Range is 5.8 m. (19 ft.).
RESTRICTIONS: *Controlling depths* for ore carriers and large tankers, at present (1975) 12.5 m. (41 ft.) at LWOST.

For vessels bound for Lambert Service Jetty – 8.8 m. (29 ft.).

Berthing of ore carriers is usually carried out at about one hour before High Water or 1.5 hours before Low Water.

Owing to tidal peculiarities, berthing at the Lambert Service Jetty is either at about 2.5 hours before HW or 3.5 hours after HW.
MAX. SIZE: Largest vessel to date (March 1976) 227,913 m.d.w.t.
RADIO: VHF is available on Channels 16, 67, 6, 9, 10, 12, 14, 71, 73, 74. Though a continuous watch is not kept. ETAs to be given 10 days, 48 hours and 24 hours in advance, addressed "Shipserve Harbour Master Portwalcott" or sent via Agent.
HEALTH: Quarantine Doctor will not board at anchorage – only when ship berthed. Pratique is automatic if having called at another Australian port. Also see "Port Limits".
TUGS: Two tugs are available for use at Cliffs jetties only. Each is 3,200 h.p. with a bollard pull in excess of 50 tons. They are twin screw with Kort nozzles. One lines launch is available. Tugs supply towing equipment.
BERTHING: *Cape Lambert*

Cape Lambert Service Jetty is owned by Cliffs Robe River Iron Associates. The neck is 1,500 ft. long and the berthing head is 510 ft. long. Off each end of the head is a mooring dolphin some 90 ft. away. This permits a vessel of about 625 ft. long to berth. There is a min. depth of 10 m. at LW. The height of the jetty, above LW, is 35 ft. Cargo is handled by ship's gear. The jetty is designed for road transport only. This is not a common-user berth and permission must be obtained from the Port Auhority before any cargo, other than C.R.R.I.A. cargo, is handled.

Lambert Ore Jetty is owned and operated by C.R.R.I.A. It extends 8,760 ft. to sea in a 046.75° direction. It is double sided and capable of handling ships up to 170,000 m.d.w.t. The depth of water in No. 1 (South) berth is 57 ft. (17.37 m.) and in No. 2 (North) berth is 63 ft. (19.2 m.). There is a single shiploader designed to operate at 6,000 t.p.h. Ships usually berth 'head out' and are secured to dolphins, parallel to the wharf. These dolphins are 25 ft. (7.6 m.) above low water. The height of the jetty is 61 ft. above low water and the boom of the shiploader is about 100 ft. above LW. The shiploader is capable of travelling over a distance of about 650 ft. (197 m.) but the boom will reach over a distance of about 870 ft. (265 m.). The boom will reach about 72 ft. over a ship.
STEVEDORES: Labour for stevedoring purposes is controlled by the Association of Employers of Waterside Labour. There are about 20 men available. Requests for labour should be made through an Agent or Stevedore. Hours of work are usually 0800–2130 and 2130–0630. This labour operates at Lambert Jetty.
TANKERS: Usually berthed 'head-in' at the Lambert Service Jetty as the deeper water (35 ft.) is at the seaward end. Discharge is through an 8 in. pipe-line which is situated about the centre of the berth. Tankers at the Lambert ore jetty are moored with two anchors and stern moorings to the berth.

A basin has been dredged to 15.24 m. (50 ft.) to accommodate tankers. Discharge is through either a 24 in. or 12 in. pipe-line via a pair of "Wheaton Arms".
CARGO GEAR: See "Melbourne".
FRESH WATER: Fresh water available – ships supply own hoses with 2.5 in. quick release fittings.
FUEL: Not available.
TIME: GMT plus 8 hours.
STORES: Dry, chiller, freezer and Bond stores are available. It is suggested that ample notice be given.
GENERAL: Port Walcott is connected by sealed roads to the towns of Wickham, Roebourne, Karratha, Dampier and Port Hedland, each of which has a hospital and other facilities. The sealed road also extends to Perth, some 1,100 miles away.
AIRPORT: At least 1 jet flight per day to Perth from Karratha (2 hours).
CERTIFICATES: Ore/Oil carriers require inspection by surveyor if previous cargo oil. Gas-free Certificates over 24 hours old are not accepted.
CHARTS: AUS.55, 740, 741, 326 & 327, plain or Decca are available at Harbour Master's Office, also AUS.56 and Aust. Nat. Tide Table. Notices to Mariners, U.K. & Aust. are available for inspection.
REPATRIATION: Carried out regularly.
TELEPHONES: Not available at the berths.
HOLIDAYS: Iron ore is loaded 24 hours per day, except for one 24 hour period over Xmas (usually 2300/24th to 2300/25th December).
SHORE LEAVE: Crew members are allowed ashore by pre-arranged bus or taxi – nearest town is 10 miles away.
DEVELOPMENTS: Considerable oil-drilling activity is expected in the near future, off the coast. Oil rigs and many rig tenders may be encountered.
AUTHORITY: Harbour and Light Department, Fremantle. Harbour and Light Department, Point Sampson.

AGENTS: Sub-agent of Patrick Agencies, Fremantle.

PORTLAND, Victoria: 38.20 S. 141.37 E. (See Plan Book)

PORT LIMITS: As much of the waters of Portland Bay as lie Westward of a line bearing due North from Point Danger to the opposite shore of Portland Bay.
DOCUMENTS: Refer to "Melbourne".
PILOTAGE: Compulsory except for exempt Masters. Pilot boards about 1 mile N.E. of main breakwater.

Approach from the West: A safe course into Portland Bay can be maintained by rounding Lawrence Rocks at a distance of 1.5 miles and altering until a course of 330° can be steered, which will clear the Southern side of the Bay between Danger Point and Portland by 1.5 miles. Steer this course until Whaler Point Lighthouse bears 270° about 2.5 miles distant where course can be altered for the harbour entrance.

Approach from East: Is a straight course after rounding Lady Julia Percy Island, 18 miles from the breakwater.
ANCHORAGE: Portland Bay is clear of all dangers and safe anchorage may be found 0.25 to 0.5 mile North and N.E. of the main breakwater and for smaller vessels between the Lee Breakwater and Whaler Reef. Holding ground is good, and excellent shelter is obtained from Westerly weather. Anchoring is not recommended in strong Easterly or South-easterly weather, as there may be a confused sea and swell.
RESTRICTIONS: *The Harbour* is bounded by 2 breakwaters, enclosing 101 hectares. The entrance is 244 m. wide.

Swinging Basin: Between the 2 breakwaters, bounded by No. 6 Berth and the Lee Breakwater.

Depth of water in the harbour is based on a datum of 0.082 m. above LWOST, which ensures a depth of not less than 11 m. under all tidal conditions. Mean rise and fall is approximately 0.75 m. but the prevailing wind has a certain influence on the tide.
MAX. SIZE: The largest vessel to use the port to date was 239 m. long.

Deepest vessel to use the port to date was with a departure draft of 11.56 m.

Also see "Tankers".
HEALTH: Portland is a first port of entry. When requiring pratique, inform the Port Health Officer of the ETA, number of crew and passengers and the state of health of the complement. Use the prefix "Shipserv" for all cabled messages. All requirements as for Melbourne.
RADIO: Maritime VHF operating on Channels 12 and 16 is installed in the Harbour Master's Office and on the tugs.

Listening on Channel 16 between 0830 and 1700 hrs. and when shipping is expected.

Radio Advice of Arrival: Address ETA telegrams to the Harbour Master, using the prefix "Shipserv".

TUGS: 1 of 1,600 h.p. and 1 of 660 h.p. available.

BERTHING: The main breakwater extends 1,280 m. in a North-South direction from Battery Point with its Northern extremity in 14 m. of water. There are 2 berths at the inshore end known as No. 1 and No. 2, K. S. Anderson Wharf.

Depth alongside No. 2 berth, is 11 m. LW with limestone and sand bottom. Max. draft is 10.5 m., which may be increased if written application made to Harbour Master, stating the maximum required.

No. 1 Berth is suitable for bulk or general cargoes. It is also used for the discharge of diesel and fuel oil and for bunkering. It is a berth ideally suited for the assembly and handling of containers or unit loads as both road and rail transport can be utilised.

No. 1 Berth has been dredged to 12.2 m. depth for a length of 200 m. and a 12.2 m. channel 91 m. wide is dredged to the entrance. Max. draft 11.6 m. Both Nos. 1 and 2 can be used for bulk grain loading

No. 2 Berth is a continuation of No. 1, and is also the grain loading berth with the silos situated at the South end of the wharf, and the loading gantry running along the roof of the shed. 2 travelling ship-loaders operate over the length of the berth; when used simultaneously capacity is up to 300 t.p.h. used singly up to 400 t.p.h. for oats, 500 t.p.h. for barley and 600 t.p.h. for wheat. The berth is also used for discharge of diesel and fuel oil, and as a bunker berth. The tank farm is approximately 1 km. distant.

BULK LOADING FACILITIES: Located at No. 1 and No. 2 berth K.S. Anderson Wharf. The loading units consist of two 27 m. high lateral traversing ship-loaders, for the delivery of bulk grain (oats, wheat, barley, maize and sorghum).

Maximum distance of traverse is 305 m. with telescopic delivery spouts providing an additional 25 m. at either end. Maximum permissible length of ship unlimited. Additional bollards are situated on main breakwater.

Maximum beam served to date 27.4 m. in bulk carrier with wing tanks.

Maximum height above LW of ship's rail to swing spouts inboard 14 m.

Gross handling rate per hour: oats 400, wheat 600, and barley 500 t.p.h. reduced when trimmers are used.

No. 6 berth is at right angle to K. S. Anderson berths and 137 m. West. The berth is designed and built for the discharge of bulk cargoes but, as with No. 1 berth, is also used for the handling of general cargo. A tallow line runs to this berth.

It is 228.6 m. in length with 11 m. LW alongside and a clay bottom. Max. draft is 10.5 m., with the same conditions as for No. 1 and No. 2 berths.

A cold store of 2,830 cu.m. is situated 228 m. from No. 6 berth, temperature of −21°C can be maintained.

TANKERS: *Lee Breakwater and S. L. Patterson Oil Berth* protrudes in an Easterly direction from point 3.7 cables South of Whaler Point Lighthouse for a distance of 1,179.5 m., with its extremity in 12.2 m. of water.

The S. L. Patterson Oil Berth is situated on this breakwater about 457 m. from the seaward end.

The wharf is 76 m. in length and designed for vessels of up to 38,000 tons grt. Depth alongside is 10.4 m. low water, with limestone and sandy bottom.

Maximum draft permitted is 9.9 m.

Berthing and unberthing of tankers is on a 24-hour basis, at the discretion of the Harbour Master. During darkness, a Pilot is compulsory.

The Shell Company of Australia Limited, and Ampol Petroleum (Victoria) Pty Limited have pipe-lines to the berth. Average discharge rate is approximately 300 t.p.h. The tank-farms are 1.5 km. from the wharf. This wharf can also be utilised as a fitting out or repair berth.

Also see "Berthing".

STEVEDORES: There are 120 registered members available.

Hours of work are from 0800 hrs to 1700 hrs., from 1700 hrs. to 2300 hrs. and midnight to 0700 hrs.

Extended shifts are allowed to be worked to 1900 hrs. each day (except Thursday and Sunday) when no twilight labour is available.

Pallets can be manufactured locally by prior arrangement.

Vessels can be serviced expeditiously under skilled supervision including fitting out for grain, battening out for freezer or general cargo and securing cargoes to departmental requirements. Ample supplies of dunnage are available.

MEDICAL: Medical, dental and optical services are available.

FRESH WATER: Is obtainable in unlimited quantity at all berths at a loading rate of over 20 t.p.h.

FUEL: Can be obtained ex-pipe-line on the K. S. Anderson Wharf for quantities in excess of 100 tons. Vessels can bunker at up to 350 t.p.h. for either grade of oil. Smaller quantities are delivered by road tank wagons.

REPAIRS: There are 3 local repair and light engineering firms capable of minor repairs.

GENERAL: *Provisions:* plentiful, good, and available at short notice. Bonded stores are at present only available from Melbourne at approximately 24 hours notice.

AIRPORT: An air service is maintained between Portland and Melbourne. 3 flights daily connecting with all interstate and international services.

TELEPHONES: At all berths. Tanker Berth No. 231852. K.S.A. 1 – (055) 231122, K.S.A. 2 – (055) 231633, No. 6 – (055) 231286.

POLICE/AMBULANCE/FIRE: Fire Brigade 232998; Police 231999; Ambulance 231666; Hospital 231033, after hours, general patients 231400.

DEVELOPMENTS: *No. 5 Berth:* Multi-purpose berth along East side of No. 2 Quay. Length 122 m., depth alongside 11 m. (Under construction).

AUTHORITY: Portland Harbor Trust Commissioners.

AGENT: Sub-agent of Patrick Agencies, Melbourne.

RAPID BAY, S.A.: 35.32 S. 138.12 E.

LOCATION: On Eastern shore of St. Vincent's Gulf about 55 sea miles South of Port Adelaide.

DOCUMENTS: See "Melbourne".

PILOTAGE: Not compulsory but recommended. Pilot station as for Port Adelaide.

VHF: Available.

BERTHING: "T" shaped jetty, 1,600 ft. long, "T" head 737 ft. berthing length. Depth 29 ft. MLWS. Loading rate 1,100/1,200 t.p.h. Height of chute above water MLWS 38 ft. The fixed chute extends 32 ft. beyond the jetty fender line.

FRESH WATER: Not available.

FUEL: Small emergency supplies only by road tankers from Port Stanvac.

TUGS/REPAIRS: None.

OPERATIONS: Working hours flexible to suit vessels requirements.

AUTHORITY: Broken Hill Proprietary Co. Ltd., Whyalla.

AGENT: Sub-agent of Patrick Agencies, Adelaide.

ROCKHAMPTON, (Port Alma) Queensland: 23.24 S. 150.33 E. (See Plan Book)

CERTIFICATES/DOCUMENTS: All documentation carried out by ship's Agents either in Rockhampton or at main Agent's office. Also see "Melbourne".

PILOTAGE: Agent notifies Pilot of ETA, and boarding time then determined by Pilot, taking into consideration circumstances prevailing.

Pilot boards from 50 ft. white launch. Pilots can be contacted by VHF Channels 8, 12 and 16, or radio-telephone 2182 and 2760 kHz.

RESTRICTIONS: Channel depth 24 ft. LWOST. Berth depth 32 ft. LWOST. Two feet keel clearance required. Max. draft dependent on height of tide.

ANCHORAGES: Anchorage for Port Alma is Timandra Buoy, approximately 13 miles from Port.

HEALTH: Health regulations carried out by Agents. Pratique only necessary when port is first port of call. See "Melbourne".

RADIO: VIR Rockhampton.

TUGS: Tug assistance obtainable if required from Port of Gladstone.

BERTHING: Berth at Pilot's discretion after receiving advice from Agent as to ETA.

Present facilities comprise 950 ft. Concrete Wharf plus Bulk Loading Berth and Conveyor also utilised as tanker berth. All berths depth 32 ft. LWOST.

STEVEDORES: Agent advises Stevedoring Company of ETA. Requisitions to be lodged for labour before 1300 hrs. on previous day. No requisition can be lodged from 1300 hrs. Friday to 1300 hrs. Monday.

MEDICAL: All medical requirements carried out by Agent. Hospital available 40 miles from Port Alma.

TANKERS: 10-inch disch. lines. No slop facilities. 1 berth 32 ft. LWOST.

FRESH WATER: Fresh water available by road transport only, necessitating road haul of 40 miles, average cost $20.00/1,000 gallons.

FUEL: No bunkering facilities available. Installations contemplated in near future. All grades of fuel available by road transport.

FIRE PRECAUTIONS: Usual precautions as laid down by the Marine Board of Queensland.

GANGWAY/DECK WATCHMEN: Crew.

OPENING/CLOSING HATCHES: Crew.

CUSTOMS ALLOWANCE: Under supervision by Custom's Department, 200 cigarettes or 1 lb. of tobacco each 10 days. Wine/Spirits, no definite information available.

CARGO GEAR: As per the Navigation Act. See "Melbourne".

IDENTIFICATION CARDS: See "Melbourne".

CONSULS: Norway telephone 276555.

REPAIRS: Minor repairs only.

REPATRIATION: Facilities available.

AIRPORT: Regular services 43 miles from Port Area.

TIME: GMT plus 10 hours.

HOLIDAYS: Christmas Day, Good Friday, April 25th and Waterside Workers' Picnic Day.

POLICE/AMBULANCE/FIRE: Tel. No. 000. 40 miles distance.

TELEPHONES: No provisions for placing telephone on board ship. Public telephone on Wharf.

AUTHORITY: Rockhampton Harbour Board.

AGENT: Sub-Agents of Patrick Agencies, Brisbane.

SPRING BAY, Tasmania: 42.33 S. 147.56 E. (See Plan Book)

DOCUMENTS: See "Melbourne".
PILOTAGE: Compulsory. Pilot boards from a tug (black hull, red funnel with black top), on a line joining the Southernmost part of Freestone Point to the Northernmost part of Luther Point (see Chart AUS 170). ETA is usually sent to vessel's Agent 72 hours prior to vessel's arrival and confirmed 24 hours and 6 hours before arrival at the Pilot station. ETA should also be sent to Harbour Master, Hobart, VHF Channel 16, call sign "Hobart Harbour". The tug from which the Pilot boards leaves Spring Bay Wharf 30 minutes before a vessel is due at the pilot station, and also keeps a listening watch on VHF Channel 16.
ANCHORAGE: A good anchorage can be found in depths of 36 to 50 ft. approximately 1–1.25 miles S.W. of Spring Bay Wharf.
RESTRICTIONS: The wharf is used exclusively by vessels loading wood chips from Tasmanian Pulp and Forest Holdings. The main wharf, on which the wood chip loader is situated, is 800 ft. long with additional dolphins (3) and a mooring block for head, stern and breast lines. Ships are normally berthed starboard side to and the port anchor is used approaching the berth. The ship loader is a fixed structure and vessels loading are required to move up and down the wharf using their own lines. At present vessels are only berthed during daylight hours, but may leave during the hours of darkness at the discretion of the Pilot. Should a vessel require to immobilise her engines, application must be made to the Harbour Master; if permission is granted a tug will be required to stand by alongside.
MAX. SIZE: The min. depth alongside the wharf is 35 ft., and the mooring dolphins and ship loading facilities were designed to accommodate specialised ships with an overall length of 685 ft. No difficulty is envisaged in working ships having an overall length of up to 800 ft.
HEALTH: The local medical practitioner boards vessels after berthing and acts for the Commonwealth Department of Health. Immigration/Customs Officers travel by road from Hobart and board after pratique has been granted. Quarantine authorities must be informed of suspected disease or fever at least 18 hours before arrival. Also see "Melbourne".
RADIO: Hobart Radio, call sign VIH. Hours of duty EST (add 1 hour for Summer Time). Monday-Saturday inclusive 0730–1730 hrs. Sunday, 0800–1600 hrs.
TUGS: 1 tug is stationed at Spring Bay. When a ship is due a second tug is despatched from Hobart and remains in the port area throughout the vessel's stay. One of the tugs is used to embark and disembark the Pilot as well as assisting in berthing and unberthing. Should tugs be required to stand-by during loading operations an additional charge will be made in respect of crews' wages etc. It is customary to use the tug's lines, for which an additional charge is made.
MEDICAL: A local doctor is available and well equipped health clinics are situated at Triabunna (3 miles) and Orford (7 miles).
DENSITY: 1025.
FRESH WATER: Limited supplies are available from the wood chip factory.
FUEL: None laid on to the wharf. In an emergency limited supplies could be provided by road tankers from Hobart.
FIRE PRECAUTIONS: No special fire precautions other than non-smoking or lighting of fires or use of naked lights.
GANGWAY/DECK WATCHMAN: None available.
OPENING/CLOSING HATCHES: Hatches are opened by the ship's crew.
CERTIFICATES: Register, Load Line Certificate, Deratisation Certificate, Light Dues, Articles of Agreement, Clearance from previous Port.
CUSTOMS ALLOWANCES: See "Hobart".
IDENTIFICATION CARDS: See "Melbourne".
CONSULS: None, see "Hobart".
REPAIRS: No facilities available for major repairs, but the wood chip factory may be able to assist in minor repairs. Local Hobart firms available.
REPATRIATION: Facilities available through Hobart.
AIRPORT: Hobart Airport is situated 49 miles from Spring Bay Wharf. Frequent services operate to the mainland from where services operate world wide.
TIME: Local time (Eastern Standard Time) 10 hours ahead of GMT. Summer Time in force from October to March when clocks advanced one hour.
HOLIDAYS: See "Hobart". Ships may be loaded on days which are regarded as holidays in Hobart.
POLICE/AMBULANCE/FIRE: Police, 573116; Ambulance, 573129; Fire, 573187.
TELEPHONES: A telephone is connected to all vessels on arrival.
AUTHORITY: Marine Board of Hobart.

SYDNEY, N.S.W.: 33.55 S. 151.12 E. (See Plan Book)

DOCUMENTS: See "Melbourne".
PILOTAGE: Compulsory. Pilots boarding ground is within 2 miles of entrance to Port Jackson. Pilot vessels fitted with VHF for communication with other ships. Watch maintained on Channel 13 while at sea and messages conducted on Channel 6.
MOVEMENT DIRECTIONS: See under "VHF".

1. Vessel shall not enter port until authorised to do so by Port Operations Officer.

2. Vessel entering port shall report to Port Operations Officer–
(a) when passing Sea Buoy, Bradley Head, Fort Denison and, where applicable, Longnose Point, and
(b) as soon as secured at berth or anchorage.

3. Vessel proceeding to sea shall report to Port Operations Officer–
(a) 1 hour before departure.
(b) when passing Longnose Point (where applicable), Fort Denison, Bradley Head and the Buoy and
(c) when clear of port area.

4. Vessel moving from berth or anchorage in port to another shall report to Port Operations Officer–
(a) 1 hour before moving.
(b) when passing Longnose Point, Fort Denison or Bradley Head, and
(c) when secured at new berth or anchorage.

Note that–
(a) a vessel must not be moved from any berth or anchorage in port without prior approval of Harbour Master (given by Port Operations Officer), and
(b) Every Port Operations Officer has been appointed to exercise powers of Harbour Master in giving enforceable directions relating to vessels in Port.

APPROACH DEPTHS: 80 ft. (24.38 m.) in entrance to Harbour, 42 ft. (12.8 m.) in East Channel, 45 ft. (13.71 m.) in West Channel.
HARBOUR BRIDGE CLEARANCE: 171 ft. 9 in. (52.35 m.) less 8 ft. (2.43 m.) for painting gantry.
HEALTH: See "Melbourne".
TIDES: Higher High Water 5.2 ft. (1.57 m.). Lower High Water 4.2 ft. (1.27 m.). Fort Denison.
RADIO: Sydney – VIS.
VHF:

1. PORT OPERATIONS AND INFORMATION SERVICE

Service co-ordinates flow of shipping traffic within Port of Sydney to ensure expeditious movement of vessels in safety, and provides information to Pilots and Exempt Masters as aid to safe navigation in Port.

Maritime VHF Radio Service operated by Board for Ports of Sydney, Newcastle, Botany Bay and Port Kembla is integrated into Port Operations and Information Service.

Service manned continuously on watch-keeping basis, each watch being under control of qualified Master Mariner, known as Port Operations Officer, who is responsible to Harbour Master.

Rules to be observed by shipping contained in Port Operations and Information Service Manual, and all shipping using port will be required to observe these rules.

Instructions concerning Maritime VHF Radio Service have been revised to fit in with Port Operations and Information Service. The revised instructions also contained in Port Operations and Information Service Manual.

Copies of Manual may be obtained, on request from the Harbour Master's office.

2. SHORE STATIONS: (Call sign "Sydney Maritime").

Interconnected system of stations handling messages for Signal Stations at Newcastle, Sydney and Port Kembla operated from central control using call sign "Sydney Maritime", will exercise control of service and provide facilities indicated below for area from 50 miles North of Newcastle to 50 miles South of Port Kembla and a distance of 50 miles to seaward.

Ships requested maintain watch on Channel 16 when in this area. If Channel 16 in use for distress, urgency or safety communications, Shore Station will maintain continuous watch on Channel 12 and ships may establish contact with Shore Station on this channel.

On the hour "Sydney Maritime" will give identification call followed by any general messages or navigational warnings.

On request Shore Station will provide following services:

(a) Navigational information.

(b) Locking weather reports from Signal Stations.

(c) Booking of ship's telephones, shore power supply, temporary lighting and other port services provided by Maritime Services Board of N.S.W.

(d) In addition, Shore Station on request from Pilots or Exempt Masters, allocates a Channel for use between ships and attendant tugs during berthing operations.

Radiotelephone Discipline. To ensure that the full advantage of efficient communications is achieved, strict radio discipline and attention to procedure, particularly on the Safety and Calling Channel No. 16 is imperative. Messages must be as brief as possible.

3. ADVICE OF ETA – SYDNEY AND NEWCASTLE HARBOURS

Vessels proceeding to Sydney and Newcastle required advise either Shore Station, "Sydney Maritime" (per medium of Maritime VHF Radio) or "Marboard" (per medium of the coastal radio service) of estimated time of arrival at entrance to port concerned at least four hours prior to such time.

"Sydney Maritime" maintains continuous watch on Channel 16 for ships reporting ETA.

4. CHANNELS IN USE

Channel No.	*Title*	*Use*
16	Safety and Calling	Initial contact or emergency use. The calling entry to either Port Information, Port Operation or Intership Channels.
12	Port Operation (Port information)	Primarily for ships passing and receiving navigational information to and from Shore Station ("Sydney Maritime").
6	Interships	1. For intership communications. 2. Working Channel for Pilot Vessels. 3. Allotted by "Harbour Control" for temporary use between ships and attendant tugs at *Port Kembla* on request of Pilot or Exempt Master.
8	Berthing Operations	1. Allocated by "Harbour Control" upon request by Pilot or Exempt Master for use in *Sydney Harbour* between ships and tugs during berthing operations.
13	Berthing Operations	1. Allocated by "Harbour Control" upon request by Pilot or Exempt Master for use in Newcastle Harbour between ships and tug, during berthing operations. 2. Used by Port Operations Officer when passing information to vessels.
14	Berthing Operations	1. Allocated by "Harbour Control" upon request by Pilot or Exempt Master for use in *Botany Bay* between ships and tugs during berthing operations. 2. Allocated by "Harbour Control" for Naval berthing operations and other special purposes.

5. DISTRESS AND EMERGENCY

In the case of fire, explosion, loss of life, sinking, collision, or such emergency, vessels should immediately call on Channel 16 (Safety and Calling) using International R/T distress signal "Mayday" or urgency signal "Pan" followed by name of vessel and signal letters, giving its position and type of emergency and if assistance required.

Other vessels on hearing a distress message must cease any transmissions immediately.

The signal "Mayday" should be used only when ship sending it is threatened by grave and imminent danger and requires immediate assistance.

The signal "Pan" (pronounced Panne) should be used by a station having a very urgent message to transmit concerning its safety, or that of another ship, or of some person on board or in sight.

TUGS: Powerful modern tugs, operated by private companies, available.

BERTHING: See "VHF".

Woolloomooloo: 7 berths, depths 28 ft. to 37 ft. (8.53 m. to 11.27 m.).

Darling Harbour: 15 berths, depths 8 ft. to 36 ft. (2.43 m. to 10.97 m.).

Pyrmont: 14 berths, depths 27 ft. to 35 ft. (8.23 m. to 10.66 m.).

Glebe Is.: 5 berths, depths 32 ft. to 42 ft. (9.75 m. to 12.8 m.).

Sydney Cove: 3 berths, depths 12 ft. to 35 ft. (3.65 m. to 10.66 m.).

Walsh Bay: 8 berths, depths 23 ft. to 40 ft. (7.01 m. to 12.19 m.).

Balmain: 1 berth, depth 33 ft. to 38 ft. (10.05 m. to 11.58 m.).

White Bay: 3 berths, depths 36 ft. (10.97 m.).

Rozelle Bay: 6 berths, depths 9 ft. to 20 ft. (2.74 m. to 6.09 m.).

Snails Bay: 4 berths, depths 36 ft. to 40 ft. (10.97 m. to 12.19 m.).

Mort Bay: 2 berths, depths 31 ft. (approx.) (9.74 m.).

Oil Terminals: See "Tankers".

HEAVY LIFTS: *Wharf Cranes:* Woolloomooloo: Berth No. 11: 2 portal cranes 26 tons (26.4 tonnes) max.

Darling Harbour: Berth Nos. 8, 9 and 10: 1 portal crane, 26 tons (26.4 tonnes) max.

Container Berths: White Bay: Berth No. 4: 1 twin lift 45 tons (45.72 tonnes) container crane, and terminal equipment.

White Bay: Berths Nos. 5 and 6: 3 twin lift 45 tons (45.72 tonnes) container cranes, and terminal equipment.

Glebe Island: Berth Nos. 1 and 2: 2 single lift 35 tons (35.56 tonnes) container cranes and terminal equipment.

A 150 ton (152.4 tonnes) floating crane available, and a 250 ton (254 tonnes) crane on Fitting Out Wharf at Garden Island Dockyard.

BULK LOADING FACILITIES: Glebe Island, Berth No. 7 (bulk wheat). Max. permissible length and beam of ship using bulk berth: length 735 ft. (224.06 m.), beam 107 ft. (32.61 m.).

Berth No. 8 (bulk soda ash). Max. length 326 ft. (99.36 m.), max. beam 45 ft. (13.71 m.). This is a private berth leased by Imperial Chemical Industries of Australia, and the plant is suitable only for the unloading of bulk soda ash.

Balmain: Berth No. 1 (bulk coal). Max. length 650 ft. (198.4 m.), max. beam 97 ft. (29.56 m.). Loading capacity 1,000 t.p.h. max.

STEVEDORES: Private companies. Stevedoring regulations are the responsibility of an operations supervisor, nominated by the ship's Agent when applying for a berth.

TANKERS:

	Max. permissible length of vessel	*Depth alongside*
Gore Bay No. 1 (Shell)	850 ft. (259 m.)	45 ft. (13.4 m.)
Gore Bay No. 2 (Shell)	560 ft. (171 m.)	31 ft. (9.45 m.)
Gore Bay No. 3 (Shell)	560 ft. (171 m.)	30 ft. (9.14 m.)
Berrys Bay No. 1 (B.P.)	525 ft. (160 m.)	28 ft. (8.53 m.)
Berrys Bay No. 2 (B.P.)	600 ft. (183 m.)	33 ft. (10.06 m.)
Ballast Point (Caltex Oil)	700 ft. (213 m.)	29 ft. (8.83 m.)
Pulpit Point (Mobil Oil)	550 ft. (168 m.)	28 ft. (8.53 m.)
Chowder Bay Dept. of Navy	560 ft. (171 m.)	31 ft. (9.45 m.)

FRESH WATER: Available at all berths at a rate of flow of approximately 30 t.p.h.

FUEL: All grades available.

IDENTIFICATION CARDS: See "Melbourne".

CONSULS: The following countries maintain consuls in Sydney:

Argentina
Austria
Belgium
Brazil
Bulgaria
Canada
Chile
Columbia
Costa Rica
Cuba
Czechoslovakia
Denmark
Dominican Republic
Ecuador
Egypt
Ethiopia
Finland
France
Germany
Great Britain
Greece
Hungary
Iceland
Indonesia
India
Israel
Italy
Japan
Jordan
Khmer
Korea
Lebanon
Malaysia
Malta
Mexico
Monaco
Netherlands
New Zealand
Norway
Panama
Papua New Guinea
Peru
Philippines
Poland
Portugal
Romania
Singapore
Sierra Leone
Spain
Sweden
Switzerland
Thailand
Turkey
Uruguay
U.S.A.
U.S.S.R.
Yugoslavia

REPAIRS: Every facility available.

DRY DOCKS: Captain Cook Dock, Garden Island – length 1,139 ft. (347.16 m.), No. 1 Sutherland, Cockatoo Island – length 690 ft. (210.33 m.), No. 2 Fitzroy, Cockatoo Island – length 478 ft. (145.67 m.). Several smaller dry docks and a number of slipways available.

CERTIFICATES:

Last Port Customs Clearance.
Ship's Register.
Load Line.
Safety Radio.
Safety Equipment.
Ship's Articles (British Vessels).
Safety Construction.

SPECIAL REGULATIONS: *Smoke Restrictions:* Ringelmann 2 limited to 10 minutes overall, 5 minutes continuous, in 60 minutes, Ringelmann 3 limited to 3 minutes in 30 minutes, in special circumstances only and as far as practicable from shore, Ringelmann 4 prohibited absolutely. Tubes must not be blown in port.

Breaches of Port Laws by a ship (in particular, oil spillages) dealt with by requiring Master to authorise ship's Agent to accept any summons and the Agent to undertake to appear, so as not to delay sailing. If Master refuses, he may be arrested, charged and released on bail. However, it is in Master's interests to give authority, because this allows time for consideration of whether any action is to be taken.

DUES: Commonwealth Light Dues payable on the nett register tonnage of vessel, valid for a period of 3 months, in Australian waters. Harbour and Light Dues payable on vessels gross tonnage valid for 6 months for the State of N.S.W. only.

AUTHORITY: The Maritime Services Board of N.S.W.

AGENT: Patrick Agencies, POB 3918, 33/35 Pitt Street, Sydney, New South Wales 2001. Tel. 27–6611. Telex. AA. 20618 Cables: "Rikpat".

THEVENARD, S.A. 32.09 S. 133.39 E.
(See Plan Book)

CERTIFICATES/DOCUMENTS/HEALTH/CARGO GEAR: See "Melbourne".

PILOTAGE: Compulsory. Pilots board 2 miles seaward of No. 1 light beacon.

MAX. SIZE: Length 650 ft. (198 m.) at the bulk loading berth; beam 100 ft. (30 m.). Draft subject to keel clearance of 2 ft. 6 in. (0.76 m.) for vessels up to 27 ft. (8.2 m.) draft and keel clearance of 3 ft. (0.91 m.) for vessels over 27 ft. (8.2 m.) draft provided weather and sea are calm.

RESTRICTIONS: Channel depth 27 ft. (8.2 m.) LW. There is a min. depth of 18 ft. (5.5 m.) LW in the swinging area off the berths.

BERTHING: Two berths, depth alongside 32 ft. (9.8 m.) LW. Vessels will be berthed head out if the draft on arrival is suitable to the depth of water in the swinging area. This particularly applies to deep loading vessels. A small tug stationed at the port to facilitate the berthing and departure of vessels. The bulk loading plant will be manned on a two shift basis with overtime as found necessary.

FUEL: Not available.

FRESH WATER: Small quantities available. Rate 12 tonnes/hour.

REPAIRS: None.

AUTHORITY: Department of Marine & Harbours, Adelaide.

AGENT: Sub-agents of Patrick Agencies, Adelaide.

THURSDAY ISLAND, Queensland: 10.35 S. 142.13 E. (See Plan Book)

DOCUMENTS/HEALTH: See "Melbourne".
PILOTAGE: Pilotage compulsory. ETA 24 hrs. before arrival stating max. draft and direction from which vessel arriving to: Harbour Master, Thursday Island. Further amended ETA if necessary prior to arrival. Pilot boards S.W. of Tucker Buoy or Scott Rock Buoy as required. Harbour Master will advise boarding ground after receipt of max. draft and direction from which vessel arriving. Pilot vessel white hull, orange top, flying pilot flag. Vessel awaiting Pilot to anchor West of Black Rock in Normanby Sound or off Scott Rock.
ANCHORAGE: West of Black Rock in 5.5 fathoms. Nurses' Home over shoulder of Black Rock 098 (T) with two white beacons S.E. side Goods Island in line 005 (T).
RESTRICTIONS: Daylight movements only. Draft restricted to 23 ft. (7.01 m.) LWOST.
RADIO: Thursday Island VII.
VHF: Channels 12 and 16. Presently VHF 12 and 16 is "Thursday Island Harbour" and is operated by the Torres Straits Pilot Service. Channels 67, 16, 12 and 6 will soon be installed in the Harbour Master's Office.
TUGS: No tugs.
BERTHING:

Wharf	*Length (Metres)*	*Depth (Metres)*
Main	30.0	4.00
Engineers	23.0	3.80
Caltex	22.9	5.48
Horn	12.5	5.00

STEVEDORES: 0800 hrs. pick up for day work. 1000 hrs. notice for night work. 1600 hrs. Friday notice for week-end work. Mainly general cargo handled. Approximately 8 t.p.h.
MEDICAL: Notice of required medical attention with ETA message to Harbour Master. Hospital, four doctors available. Vaccinations etc., as per Commonwealth of Australia requirements.
DENSITY: Salt at all states of tide.
FRESH WATER: Available in limited quantities most of the year.
FUEL: Small amounts diesel and distillate available at Main Jetty. Bulk distillate available at Caltex Jetty, approx. 20 t.p.h.
GANGWAY/DECK WATCHMEN: Crew member on gangway sufficient.
OPENING/CLOSING HATCHES: By Stevedores.
CERTIFICATES: Normal Commonwealth of Australia requirements. See "Melbourne".
CONSULS: Nil.
REPAIRS: Deck and engine repairs, excluding large castings.
REPATRIATION: Available.
AIRPORT: Airport on Horn Island, 2 miles by launch, 4 miles by bus. Six flights per week. Ansett Airlines of Australia regular airline. Private charter plane available.
TIME: Australian Eastern Standard Time.
HOLIDAYS: Normal Queensland Public Holidays. No cargo can be worked on Christmas Day, Good Friday, Anzac Day.
POLICE/AMBULANCE: Police 20. Ambulance 77.
TELEPHONES: None.
SERVICES: Garbage disposal. Apply to Harbour Master.
DELAYS: As wharf space limited and berthing is on a "first come, first served" basis, delays vary with amount of shipping.
AUTHORITY: Harbour Master, Department Harbours & Marine.
AGENT: Sub-agent of Patrick Agencies, Brisbane.

TORRES STRAIT:

MAXIMUM DRAFT & UNDERKEEL CLEARANCE: The Queensland Coast & Torres Strait Pilot Service will pilot vessels through Torres Strait on a maximum draft of 11.89 m. (39 ft.). This draft limitation extends from Booby Island to Bramble Cay on the Great Northeast Channel Route and from Booby Island to Cairns on the Inner Route of the Great Barrier Reef. On completion of currrent (1978) survey and tidal analyses it is possible that a deeper maximum draft will be attainable and up to date information may be obtained from "Torres", Sydney.
GANNET PASSAGE (BOOBY ISLAND) & PRINCE OF WALES CHANNEL: These are the two tidally restricted and, therefore, controlling areas for traversing Torres Strait, the Great Northeast Channel and the Inner Route. Gannet Passage has a least depth of 9.8 m. (32 ft.) and is marked by two light buoys which may be shifted from time to time. Daily tidal rises enable vessels to cross Gannet Passage allowing a minimum U.K.C. of one metre at all times of the year, weather conditions permitting and at the Pilot's discretion. There is an automatic telemetric tidal gauge situated on Booby Island (see No. 4055 – Admiralty List of Radio Signals & Radio Navigation Aids; Vol. 2, 1977) which promulgates exact tidal heights in Gannet Passage. A recent detailed hydrographic survey by H.M.A.S. "Flinders" (1977/78) established a least depth of 11.6 m. (38 ft.) on the usual pilotage track in P.O.W. Channel. It is planned to establish, in the near future, further automatic telemetric tide gauges in this channel. Masters of deep draft vessels are advised that reductions in speed may be necessary in both Gannet Passage and P.O.W. Channel.
BOARDING STATIONS: Pilots will board 4 miles West of Booby Island lighthouse or 3 miles West of Goods Island lighthouse, as required. Pilot launches keep a listening watch on VHF Channel 16 when on station. Masters are requested to ensure that pilot ladders and boarding arrangements comply with international and Australian standards of safety.
COMMUNICATIONS: *(a)* Vessels should confirm ETA, at Booby or Goods Islands, 24 hours prior to arrival and again when position has been established off the Carpentaria lightvessel. These radio messages should be addressed to "Torind", Thursday Island and relayed via Thursday Island radio station (VII).

(b) ETA messages should be given in local time (GMT + 10 hours) and be prefixed with the non-chargeable code word "Shipserv" which will ensure prompt delivery 24 hours a day, every day.

(c) When 10 miles West of Booby Island, vessels should open VHF Channel 16 and establish contact with the Thursday Island base pilot station (call sign – "Thursday Island Harbour") which maintains a listening watch on Channel 16 and operates on Channel 12. Masters should bear in mind that no Pilots are stationed on Booby Island and that it takes a pilot cutter approximately two hours to reach the Booby Island boarding station from Thursday Island.

(d) All vessels (piloted or unpiloted) are requested to keep International Radio watch hours when between Carpentaria L/V. and Bramble Cay (Great Northeast Channel Route) or between Carpentaria L/V. and Cairns on the Inner Route – see Australian Notice to Mariners No. 415/1975. A continuous VHF watch on Channel 16 should also be maintained from a position 10 miles West of Booby Island to Wyborn Reef (Inner Route) or to Bet Reef (G.N.E. Channel Route). When within the Inner or Great Northeast Channel Routes it is extremely important, for traffic safety reasons, to open the VHF on Channel 16 whenever another vessel is sighted and not to close the set until both vessels have passed, and are well clear of, one another.

(e) Masters of deep draft vessels will be advised, by radio in advance, the time limits on day of arrival when tidal conditions will permit transit of Gannet Passage & P.O.W. Channel.
TO ORDER A PILOT:
South & East Bound: Masters are requested to advise "Torres" Sydney, five days in advance, which boarding ground (Booby or Goods Islands) is required, the ETA thereat, deepest draft and where bound. Thereafter, Masters are requested to confirm, or amend, ETA to "Torind", Thursday Island as advised in *(a)*, *(b)* & *(c)* of the "Communications" section of this entry.
North & West Bound: If in an Australian port instruct Agents to arrange with "Torres" Sydney, giving as much notice as possible. If from an overseas port and requiring a Pilot to board at any Australian port fairway, Euston Reef or Fitzroy Island, radio "Torres" Sydney, preferably about five days in advance, giving ETA at embarkation point, deepest draft and where bound. Confirmation, or adjustment, of ETA to "Torres" is also requested 48 and 12 hours prior to arrival.
Papua New Guinea: Vessels Westbound through Torres Strait (via Great Northeast Channel) may obtain a Pilot at Basilisk Beacon (Port Moresby harbour entrance) and at all main ports elsewhere in Papua New Guinea including Kieta/Anewa Bay on Bourgainville Island.
Gulf of Carpentaria: Pilots are available at the ports of Weipa, Groote Eylandt and Gove.
Northern Territory: Pilots are available at Darwin.
Any Other Place/Position: By arrangement with "Torres", Sydney.

Masters are requested to note that all shipping radio messages to Australian addresses should be prefixed with the non-chargeable code word "Shipserv" to ensure prompt delivery 24 hours a day, every day. All messages to "Torres" will be acknowledged.
AUTHORITIES: Australian Pilot, Vol. 3, 1973; pp 81 & 234–237. Australian Notices to Mariners Nos. 138/1970, 415/1975, 37/1978.

The Queensland Coast & Torres Strait Pilot Service, F.A.I. Building, 185 Macquarie Street, Sydney, N.S.W. 2000, or, Box 1573, G.P.O., Sydney, N.S.W. 2001. Telephone 221–3999. Code Address, "Torres". Telex AA20269.

TOWNSVILLE, Queensland: 19.17 S. 146.48 E. (See Plan Book)

PORT LIMITS: The Townsville Harbour Board exercises jurisdiction over the Port of Townsville which is located at 19° 17′ South Latitude and 146° 48′ East Longitude and is the area comprised within a line connecting Cape Cleveland with the N.E. extremity of Magnetic Island, thence by the line of high water mark to the most Northerly extremity of Magnetic Island, thence by a line to the White Rock, thence to Bay Rock, thence to Cape Pallarenda, thence by the line of high water mark on the mainland to the point of commencement, and including all navigable rivers communicating with that area and the banks and foreshores thereof.
APPROACHES: The approach to Cleveland Bay anchorage from the Southward is clear of dangers, with the exception of Salamander Reef, the Four-foot Rock, and the Twenty-foot Rock, all these lying within a radius of 3 miles of Cape Cleveland Lighthouse.

To clear these dangers, passing North of them bring Mount Marlow in transit with the extremity of Hawkings Point, bearing 265° (258° Mag.) before approaching within 5 miles of Cape Cleveland, which will then bear 252° (245° Mag.); and, if passing between them, the leading lights on Cape Cleveland should be brought in line bearing 291° (284° Mag.) before they are approached within 5 miles. Proceeding into Cleveland Bay a depth of not less than 8.2 m. will be obtained by keeping North of the line Mount Marlow in line with Hawkings Point.

Approaching Cleveland Bay from the Northward, passing East of Magnetic Island a vessel should keep at least half a mile off Magnetic Island shore to obtain not less than 9.1 m. of water at

LWOS. The shore is steep too except for Orchard Rocks off the N.E. extremity of the island.

ENTRANCE CHANNELS: 10 pairs of lighted beacons (numbered East and West from seaward) and the East and West Breakwater beacons mark the entrance channels into Townsville Harbour. The Fairway beacons are 210 m. apart transversely. Nos. 2 and 3 beacons are 164 m. apart and all other pairs of beacons are 180 m. apart.

Sea Channel: This Channel 1.75 miles in length (for use by vessels with draft exceeding 8 m.) lies between Nos. 1, 2, 3 and 4 beacons which are spaced at 1,070 m. intervals. Only Nos. 1 and 4 beacons are fitted with day marks.

The centreline of this channel is marked by the V-shaped white Sea Leads in line bearing 201.5° (194.5° Mag.), at night the Front Lead (No. 5 East Beacon) exhibits a white light flashing every second.

The Back Sea lead, 915 m. from the Front Lead, exhibits a white light flashing every 1.5 seconds.

Platypus Channel: The channels alter in direction at No. 4 Beacons and the Centreline of the Platypus Channel proceeds in a 212° (T) direction 3.5 miles to the harbour entrance and is marked by 2 V-shaped Gayglo Orange Triangular Leads with black centre, in line bearing 212° (205° Mag.), at night these leads each exhibit a Red Neon Candle Light. No. 5 beacons are 520 m. from No. 4 beacons, thence there are 5 pairs of beacons and the East and West Breakwater beacons at 1,000 m. intervals.

DOCUMENTS: *Customs:*

3 Crew Lists, form M. and S–11.
3 Passenger Lists.
3 Lists of Ports of Call.
1 Form 42A Ships Stores.
1 Form 5 Articles Owned by or in the possession of Master, Officers and Crew.
1 Form QA4 Quarantine Notice.
2 Forms QA5 Quarantine Shipmaster's Bond.
2 Inward Manifests.
1 Bill of Lading.
1 Outward Manifest.
1 Form 40 Application for Clearance and Guarantee to Pay Duty.

Health:

Form Q360 Health Report which is taken aboard by inspecting Officer.

Harbour Authority:

2 copies of Inward and Outward Manifest.

PILOTAGE: The Pilot is ordered through the ship's Agent or direct to Harbour Master at least 24 hours before arrival or last port of departure stating ETA and draft. Telegraphic Address "Harbour Master". VHF Channel 16. Call sign "Townsville Harbour". Pilot launch is 42 ft. wooden launch equipped with VHF Channels 6, 12 and 16. Light or sound signal by vessel requiring Pilot is International Call G. For other than deep draft vessels Pilots board within 1.5 – 2.0 miles East of Hawkins Point. Ladder placed on starboard side. Location of anchorage for vessels awaiting a Pilot is off Magnetic Island between Bremer and Hawkins Point.

ANCHORAGES: Boundaries: Orchard Rocks/Cape Cleveland. Cleveland Bay Depths 27 ft. to 40 ft.

RESTRICTIONS: 2 ft. of water under keel at all times.

Harbour Depths:

Sea Channel and Platypus Channel (width 92 m.)	10.7 m.
Swing Basin (396 m. diameter)	10.7 m.
No. 1 (tanker) berth (4.6 m. off)	12.5 m.
No. 2 (20t crane) berth (4.6 m. off)	8.4 m.
No. 3 (Container crane) berth (4.6 m. off)	11.1 m.
No. 4 (Gen. & Ro-ro) berth (4.6 m. off)	9.2 m.
No. 6 (No. 1 Pier E) Gen. cargo berth (4.6 m. off)	8.2 m.
No. 7 (No. 1 Pier W) Minerals shiploader berth (4.6 m. off)	11.0 m.
No. 8 (No. 2 Pier E) Freezer berth (4.6 m. off)	10.0 m.
No. 9 (No. 2 Pier W) Sugar shiploader berth (4.6 m. off)	10.8 m.
No. 10 (Container Ro-ro berth)	7.0 m.
Between berth 4 and 6 (77 m.)	9.0 m.
Between berth 7 and 8 (84 m.)	8.5 m.
Between berths 9 and 10 (142 m.)	9.0 m.

MAX. SIZE:

Berth No.	*Length*	*Max. Length of Vessel*
1	244 m.	238 m.
2	256 m.	238 m.
3	256 m.	238 m.
4	246 m.	238 m.
6	134 m.	160 m.
7	183 m.	195 m.
8	217 m.	220 m.
9	230 m.	228 m.
10	160 m.	152 m.

Generally, the limit in size of vessels entering the harbour will be 238 m. in length and 34 m. beam. Large vessels will only be taken into No. 4 berth on condition that no vessels are berthed at No. 3 berth closer inshore than mark No. 22 on arrival and mark No. 20 on departure and that a vessel berthed at No. 6 berth is shoreward of No. 5 mark on both arrival and departure of a vessel at No. 4 berth.

When tankers of over 213 m. in length are being berthed at No. 1 berth, no vessel at No. 2 berth is to be seaward of mark No. 43.

Decking of all wharves is 5.18 m. above datum with the exception of No. 2 and No. 3 which is 5.97 m.

Largest single cargo: Inward 56,506 tonnes of bulk oil. Outward, 35,000 tonnes of raw sugar.

Deepest draft vessel, 12.04 m. Longest vessel, 252.36 m. Largest vessel (Tanker) 85,180 d.w.t.

HEALTH: Townsville is a first port of entry and notification of quarantine inspection requirements should be made not more than 24 hours nor less than 12 hours in advance. Inspections may be carried out at the wharf or at the quarantine anchorage, at the discretion of the Quarantine Officer. Rat guards are to be maintained on all mooring lines while vessels are berthed in the Townsville Harbour.

RADIO: Townsville Radio. The Port Radio Station "Townsville Harbour" keeps continuous watch on VHF Channel 16. Working Channels 6 & 12.

TUGS: Normally join at harbour entrance. Tug lines or (optional) ship's lines. Tugs equipped with VHF radio and operate on Channel 16, the same as Townsville Harbour. Two tugs available bollard pull 26 tons each.

VHF: Continuous watch maintained on Channel 16. Call sign "Townsville Harbour". Channels 6 and 12 also available.

BERTHING:

No. 1 berth (isolated) is used exclusively by tankers for bulk oil discharge and by all types of vessels for bunkering.

No. 2 berth (eastern breakwater) has one 20 t. electrically operated, level luffing, travelling jib crane with an outreach of 13.7 m. and height above wharf of 18.288 m. A second crane of similar design is being modified to give a greater outreach with reduced lifting capacity.

No. 3 berth (eastern breakwater) is equipped with a container crane which is leased to Townsville Transport & Services Pty. Ltd. and is operated and controlled by Northern Shipping & Stevedoring Pty. Ltd. Both of these companies are part of the M.I.M. Holdings Group. The crane has lifting capacity of 55 tons and its equipment includes an extendable spreader to suit all sizes of containers, a grab of 7.6 cu.m. capacity and a heavy lift hook. Maximum height of lift above wharf deck is 27 m. whilst the outreach beyond the wharf face is 31.85 m. and outreach over rail and road services is 23.77 m. Distance between bogies is 32.61 m. The crane traverses the full length of berths 2 and 3.

No. 4 berth (eastern breakwater) has a landing pad, supported by steel piling, to service stern angle ramp Ro-ro vessels in the U.K./Continent trade.

No. 6 berth (No. 1 pier E.) is a general purpose berth with oil bunker and bulk molasses loading pipe-line facilities.

No. 7 berth (No. 1 pier W.) supports a bulk shiploader through which passes mineral concentrates, phosphate rock and ores up to 102 mm. aggregate at the rate of 1,000 t.p.h. The berth is also equipped with bulk molasses loading pipe-line facilities.

No. 8 berth (No. 2 pier W.) services the export frozen beef trade with cargoes drawn from freezer stores erected on the pier. It also serves as a general purpose berth.

No. 9 berth (No. 2 pier E.) is the raw sugar loading berth. A bulk shiploader delivers sugar to carriers at the rate of 1,500 t.p.h.

No. 10 berth (A.N.L. Ro-ro berth) is equipped with a stern ramp for Ro-ro traffic and 25 tons, 32 m. radius, travelling jib crane for container and unit load handling.

Wharf Sheds: No sheds are available for general cargo storage at the harbour. Both free and bonded warehousing is available within 4 km. of the wharves.

Storage facilities:

Oils – all major Oil Companies operate ocean terminals close to the Harbour.

Raw Sugar – 2 storage sheds of 285,000 tonnes total capacity.

Molasses – 4 bulk storage tanks of 35,000 tonnes total capacity.

Zinc Concentrates – 40,000 tonnes covered storage area.

Frozen Meat – 2 cold stores on No. 2 Pier, total capacity 2,500 tonnes.

Open space storage for Rock Phosphate, Sulphur, Crude Lead and Refined Copper.

Container Terminals: No. 3 berth, with an area of 1.2 ha., has storage accommodation for 184 dry containers.

No. 10 berth, with an area of 2.6 ha., can accommodate 400 containers, 18 of which may be connected to refrigeration power outlets.

Northern Shipping and Stevedoring Terminal with an area of 0.66 ha., has a holding capacity of 112 refrigerated containers.

Container Terminals work 24 hours per day, 7 days per week to effect speedy turn around of shipping.

STEVEDORES: Times for ordering labour: Normal 1400 hrs. previous working day. Bulk Cargoes 0930 hrs. for night labour. Saturday or holidays 0930 hrs. previous working day. Priority labour 1400 hrs. previous working day. Notice required for difficult or long tows or a cargo requiring particular or special handling.

MEDICAL: Advance notice not particularly required unless urgent assistance required. Hospital facilities available. Health book inspected by boarding doctor.

TANKERS: Diameter of load/discharge lines: white fuel 10 in., black fuel 12 in. No residue discharge facility available. One tanker at berth at any time. Max. permitted draft at berth 31 ft.

DENSITY: Average density 1025 at all times.

FRESH WATER: Fresh water is available at all berths: delivery is at the rate of approximately 90 t.p.h. using 4 hoses. Hoses have 2.5 ins. London V thread fittings.

FUEL: Bunker fuel oil and distillate is available through pipe-lines at berths 1, 6 and 7. Road tankers are used to bunker small ships at other berths.

FIRE PRECAUTIONS: Tankers required to have safety fire wires lead off foc'sle head and run as far aft as possible. Vessels at all times capable of manoeuvring with main engines.

DEVELOPMENTS:

In Progress:

1. Reconstruction of No. 2 berth to 50,000 ton ship standard and dredging to 12.2 m.
2. Modification of one 20T electric crane at No. 2 berth to provide a greater outreach with a corresponding reduction in lifting capacity.
3. Construction of rock phosphate conveyor systems.
4. Construction of a 457 m. rock wall extending from the Eastern breakwater in a Southerly direction. The area will later be filled to provide back-up land for the No. 3 container crane berth.
5. Construction of a training wall at Ross River to provide protection for the fishing fleet.
6. Dredging of a channel into Ross River to allow access for small craft.

Planned:

1. Dredging of No. 6 berth to permit berthing of 50,000 ton d.w.t. vessels.
2. Demolition of Magazine Hill.
3. Reclamation of 22.3 ha. behind Eastern breakwater to service No. 3 container berth and other facilities.
4. Construction of additional rail access over the south bank of Ross River to facilitate the passage of phosphate rock trains transporting in excess of one million tonnes annually.
5. Construction of one, and subsequently two, additional raw sugar storage sheds.
6. Construction of new rail access for sugar trains and marshalling yards in the area now occupied by Perkins Street.
7. Installation of a stacker/reclaimer for phosphate rock when the trade exceeds one million tonnes annually.
8. Upgrading of No. 6 berth, construction of berthing and mooring dolphins and installation of a bulk shiploader.
9. Proceed with detailed plans for development of port facilities South of Ross River. A large area of land has been acquired for this purpose.

GANGWAY/DECK WATCHMEN: Services available at ship's option.

OPENING/CLOSING HATCHES: Optional for either crew or stevedores.

SHIP'S CERTIFICATES:

Passenger Ship Safety.
International Load Line.
Ship Safety Construction.
Ship Safety Equipment.
Ship Safety Radiotelegraphy.

CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes or 0.5 lb. tobacco on arrival and then can be purchased by the packet from bar on board. Wine and/or spirits: 1 opened bottle (26 oz.) spirits or wine on arrival and then spirits by the glass and wine by the bottle, from the bar on board.

CARGO GEAR: Australian Navigation Dept. requirements.

CONSUL: Netherlands representative, Tel. 71.6188.

REPAIRS: All deck and engine repairs can be carried out.

DRY DOCKS: Slipway with a capacity of 1525 tonnes d.w.t. Slip can accommodate a 67 m. length vessel. Air, power, and water are available at the slip.

REPATRIATION: Full facilities exist for effecting crew changes and arranging repatriation.

AIRPORT: Distance from airport 6 miles, regular services.

TIME: East Australian Standard Time, GMT plus 10 hours.

HOLIDAYS: Cargo can be worked on all holidays except Christmas Day, Good Friday and the Waterside Workers' Picnic Day.

EMERGENCY TELEPHONE NUMBERS: Police, Ambulance or Fire "000", and ask to be connected to service required. Non-emergency numbers. Police 71.2121, Ambulance 79.3722, Fire Station 71.2111. Hospital 72.1333.

TELEPHONE: Ship to shore telephones are available at all berths. Oil tankers berthed in the port are required to have on board a flash proof telephone of a type approved by Telecom Australia.

Ships telephone lines are barred access to STD and trunk facilities.

SERVICES: Services available for compass adjusting, radio and radar service. A floating boom and an oil skimming device is available to deal with oil spills. Chemical dispersants are used for minor spills.

A garbage collection vehicle will call at each ship which has ordered the service before 0800 hrs. each day or at other times as directed by the Quarantine Officer. All garbage must be kept in drums with tight fitting lids on board the vessel until the arrival of the collection vehicle.

Ships crew is required to deliver garbage to the collection vehicle.

SHORE LEAVE: Crew members allowed shore leave.

AUTHORITY: Townsville Harbour Board.

AGENT: Sub-agent of Patrick Agencies, Brisbane.

WALLAROO, S.A.: 33.56 S. 137.37 E. (See Plan Book)

DOCUMENTS: See "Melbourne".

PILOTAGE: Compulsory. Pilot boards from 1 to 1.5 miles 260° (T) from Moonta Shoal Light Beacon.

RESTRICTIONS: Approach Channel and basin 28 ft. (8.5 m.) ISLW.

VHF: Available.

BERTHING: 6 berths. Depths various from 24 ft. (7.3 m.) to 31 ft. (9.4 m.). Bulk loading berth max. permissible length 650 ft. (198 m.), max. beam 100 ft. (30 m.).

TUGS/FUEL: None.

STEVEDORES: Arrangements with private companies.

FRESH WATER: Available all berths. Delivery rate 15 t.p.h.

REPAIRS: Minor repairs only.

AUTHORITY: Department of Marine & Harbours, Adelaide.

AGENT: Sub-agent of Patrick Agencies, Adelaide.

WEIPA, Queensland (including Albatross Bay): 12.42 S. 141.41 E. (See Plan Book)

PORT LIMITS: Seaward boundary commencing at a point at high water mark on the Western Extremity of Duyfken Point, thence by a line in a 173° (T) direction to the high water mark at Boyd Point.

DOCUMENTS/HEALTH: See "Melbourne".

PILOTAGE: Vessels requiring Pilot may apply to Harbour Master, Weipa 48 hours before arrival, confirming ETA 24 hours before. Vessels to give Harbour Master their draft. Generally speaking minimum berthing draft should be, forward 2% of vessel's length and aft, the propellor completely immersed.

Pilot boat is 11 m. (length), named "Rowland Masterman" and painted orange. It may be contacted on VHF Channel 16. Pilot boards 1 mile S.W. of Fairway Beacon.

ANCHORAGE: Anywhere in Albatross Bay except between 2 lines situated 1 mile North and South respectively of the line of leads and extended to the port limits.

RESTRICTIONS: Weipa Approach Channel is 7.8 miles long with a min. depth of water 11 m. (36 ft. 1 in.) LWOST. Usually vessels up to 30,000 d.w.t. enter channel at any stage of the tide. Vessels of over 30,000 d.w.t. enter at any stage of the flood up to 2.5 hours before HW.

Usually vessels up to 30,000 d.w.t. can berth at any state of the tide. Vessels of over 30,000 d.w.t. due to their departure draft and existing tug power must berth starboard side alongside and can do so at any stage of the flood tide. Vessels normally depart 1.5 hours before HW. Some vessels up to 30,000 d.w.t. can depart on LW.

MAX. SIZE: Maximum LOA 254 m. (835 ft.) Beam 35.3 m. (116 ft.) Draft depends on height of tide and 90 cm. (3 ft.) keel clearance is required.

HEALTH: See "Melbourne".

RADIO: Forcomal, Sydney Radio and within 48 hours Thursday Island Radio.

VHF: Call "Weipa Harbour" on Channel 16 on arrival 1 mile S.W. of Fairway Beacon. Tugs operate on Channels 6, 8 and 12. Vessels to advise "Weipa Harbour" passing Fairway Beacon inward and outward and on arrival at and prior to departure from the wharf.

RADAR: No Port Radar.

TUGS: Vessels entering North of Cora Bank tugs join at No. 9 Beacon. Vessels entering South of Cora Bank tugs join at No. 16 Beacon. Tugs are usually used in the lashed up position using tug's lines.

3 tugs are available of 13, 23 and 24 tons bollard pull.

BERTHING: Loading and discharge at Humbug Point generally by ship's gear but mobile cranes may be hired if required.

Evans Landing Wharf is generally only used for petrol and distillate discharge.

Cranes 2×70 tonne P.&H. 1×31 tonne P.&H. 1×26 tonne P.&H. 2×12 tonne Austin and Weston. 1×12 tonne B.H.B. 1×8 tonne Cranville.

BULK HANDLING FACILITIES: Two Bauxite Berths, Lorim Pt. West old berth and Lorim Pt. East which is an extension of the previous old berth. Depth alongside Lorim East 12.5 m. (41 ft.) Lorim West 12.5 m. (41 ft.).

Loading rates are Lorim West 3,500 t.p.h. Lorim East 6,000 t.p.h. If there are vessels at both berths loading simultaneously the rates are West 3,500, East 4,500.

SPECIALISED CARGO HANDLING FACILITIES: Nil.

BRIDGES: Nil.

STEVEDORES: No special advice required. None available for working on ships.

MEDICAL: Inoculations per Australian Regulations. No notice required for medical attention. Urgent cases flown out and treated at Cairns or Thursday Island. Hospital facilities available for minor cases.

TANKERS: Eight inch discharge lines. Tankers berth at Evans Landing and Lorim Point.

DENSITY: Dry Season 1024. Wet Season 1012. These figures can vary considerably.

FRESH WATER: Available at all berths. 5 t.p.h.

FUEL: Not available.

FIRE PRECAUTIONS: No specific precautions.

STORES: Very limited stores are available. In emergency large orders could be supplied only if several days notice given by radio, as they have to be flown from Cairns.

DEVELOPMENTS: The Alumina Plant at Weipa has been deferred indefinitely.

GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: Work carried out by crew.
SHIP CERTIFICATES: Ship's Register, Load Line, Safety Radio and Safety Equipment Certificates. See also "Melbourne".
CONSULS: None.
REPAIRS: Not available.
DRY DOCKS: Nil.
SURVEYORS: Lloyd's surveyor available at Cairns.
CUSTOMS ALLOWANCES: See "Melbourne".
CARGO GEAR: See "Berthing".
HOLIDAYS: Closed port Good Friday and Christmas Day. No movements or cargo work on these days.
POLICE/AMBULANCE/FIRE: Police 733119, Ambulance 733444, Fire 733444. As no telephone supplied contact "Weipa Harbour" on Channel 16 for these services.
SERVICES: Not available.
SHORE LEAVE: See "Melbourne".
IDENTIFICATION CARDS: See "Melbourne".
REGULATIONS: Vessels may not immobilise without written permission from the Harbour Master.
DELAYS: The only delays to be normally expected are as under restrictions, i.e. awaiting tides.
REPATRIATION: Can be arranged.
AIRPORT: 7 miles from airport. Served by Ansett.
TIME: GMT plus 10 hours.
AUTHORITY: Harbour Master, Dept. Harbours and Marine, Weipa.
AGENTS: Sub-agent of Patrick Agencies (through Patrick's Melbourne).

WESTERNPORT, Vic.: 38.21 S. 145.14 E.

(See Plan Book)

PORT LIMITS: The Port Authorities consider a vessel to be arrived when she crosses an imaginary line between West Head and Point Grant.

DOCUMENTS: Application for berth, tugs, mooring launches, telephones, and notification to load or unload, to be delivered by Ship's Agent to Harbour Master not less than 24 hrs. before arrival.

Customs Documents required:

Form M & S 11	Crew List and attachments, 3 copies.
M 42 A	Stores List, 1 copy.
5	Articles owned by or in possession of crew, 1 copy.
C & E 886	Ports of call since commencement of voyage, 3 copies.
QA 3	Quarantine Form. (Animals carried as cargo), 1 copy.
QA 4	Quarantine Form. (Animals carried as pets), 1 copy.
QA 5	Ship Master's Bond re animals carried, 1 copy.
Q 360	Health report of all persons on board, 2 copies.
	Inwards Manifest, 1 copy.
	Outwards Manifest, 1 copy.
40	Application for clearance.

PILOTAGE: Pilotage compulsory for merchant vessels except those specially exempted. Pilots for Westernport are available on a 24-hr. basis. Warning must be given not less than 24 hrs. prior to vessel's arrival. Pilot for Westernport will board from a launch, painted orange and showing the signals and lights prescribed for such vessels, by day approximately 3 miles Southward from West Head. By night in the white sector of McHaffie's Point Light, with Cape Schank Light bearing 295° (White), at the entrance to Westernport. Pilot launch is equipped with VHF Channel 16 (156.8 mHz).

In bad weather, vessels up to 32 ft. draft obtain Pilot by proceeding to black can buoy moored 2 miles – 084° from Flinders Jetty light; at night buoy shows green flash light every 4 secs.

ANCHORAGES: Anchorage within port between Southern edge Tortoise Head Bank, and Northern shore of Phillip Island. Anchorage 4 miles in length, East to West, and 1.25 miles wide, depths 9 to 15 fathoms at Western end, decreasing 6 to 10 fathoms at Eastern end.

An anchorage area having a least depth of water of 28 ft, has been established adjacent to Long Island Jetty.

RESTRICTIONS: No vessel shall enter port with less underkeel clearance than ten per cent of draft.

MAX. SIZE: Governed by underwater clearance. Vessels drawing up to 48 ft. may enter depending on state of tide, but underkeel clearance shall not be less than ten per cent of draft.

Oil jetties can accommodate vessels of up to 100,000 tons, depending upon water available.
See "Tankers"

RADIO: *Advice to ships Masters on Westernport Harbour Control*

GENERAL INFORMATION

1. *Radio Watch*	A continuous radio watch will be kept by Harbour Control on VHF Channel 16. Main working channel is 14.
2. *Pilot Boarding Ground*	Position 3 mile × 180° from West Head will be identified as position "A".
3. *Fairway Buoy*	Position of Fairway Buoy (Fl. 4 sec.) will be identified as position "B".

INWARD BOUND VESSELS

1. Vessels shall report to Harbour Control at least 1 hour before arrival at position "A" or "B", giving ETA position "A" or "B", deepest draft and information re-hull leaks and health of crew, etc.
2. Vessels must request permission to enter port. It is an expressed condition of entry that any malfunction or impairment of machinery, steering and propellor indicators which could cause restrictions in the manoeuvring ability of the vessel, is reported to Harbour Control and to the Pilot when engaged.
3. Vessels shall advise Harbour Control when passing Fairway Buoy (position "B"). Sea lashings to be removed from anchor cables and anchors made ready for immediate use.
4. Vessels shall advise Harbour Control when rounding Sandy Point and request VHF Channel for berthing operations and tugs.
5. Vessels shall report to Harbour Control (Channel 16) when all fast, finished with engines and tugs dismissed.

OUTWARD BOUND VESSELS

1. Vessels shall contact Harbour Control 1 hour before fixed time of departure advising if they will/will not be ready to sail in 1 hour's time.
2. Vessels will be advised at sailing time by duty Harbour Master re permission to sail, port movements, etc.
3. When vessels clear their berth and tugs dismissed and proceeding they shall report this to Harbour Control (Channel 16).
4. Vessels to advise Harbour Control when (a) Rounding Sandy Point. (b) Clear of Port.

VESSELS PROCEEDING TO ANCHORAGE

1. Vessels inward and outward to an anchorage are to use the same procedure as in above for inward and outward vessels respectively. Vessels will be advised if required to anchor and what anchorage to use. Whilst at anchor vessels shall keep a continuous listening watch on Channel 16.
2. Vessels shall advise Harbour Control when they have anchored and also when vessels are underway again from an anchorage.

ENGINE TRIALS AND LIFEBOAT DRILLS, ETC.

1. Vessels wanting to carry out engine trials shall first obtain permission from the duty Harbour Master.
2. When lifeboat drills are to be held and boats swung out and put into the water the duty Harbour Master shall be given prior notice.
3. All vessels in the port shall notify Harbour Control (Channel 16) of any distress signals sighted or any untoward occurrence.

PRATIQUE: Advise state of crew's health 24 hrs. prior to arrival. If all healthy, pratique granted subsequent to berthing; if crew's health suspect, doctor boards prior to berthing. Pratique automatic when more than 14 days have elapsed since calling at a foreign port, and the vessel has subsequently been granted pratique first at another port within the Commonwealth of Australia. Pratique may be granted 24 hrs. a day.

TUGS: Two tugs are available both of 1,500 h.p. and 22 ton bollard pull. Tugs join vessel at Sandy Point. Ship's lines normally used by tugs. Tugs are fitted with VHF and radar and fire-fighting equipment.

BERTHING: Berthing subject to Harbour Master's direction. 3 oil berths, 2 steel works berths (one is Ro/Ro) and 2 tug berths are available.

Steel Industry Wharf (2 Berths) (16.5 n.m. from Entrance): Berths are owned and utilised by J. Lysaght (Australia). Approach channel has a depth of 9.1 m. Depth alongside both berths is 12.1 m. Swing basin diameter 457 m. Steel works is 2.5 Km. from berth.

Steel Industry Wharf No. 1: Ro/Ro.Berth – Vessels with stern door up to 10,000 tons.

Ramp details: Length 28 m. (curved), width 8.5 m. Ramp made up of 7 sections which are hydraulically operated to allow accommodation of various types of stern loading/discharging vessels.

Ramp section is approximately 3 m. proud of stern berthing fenders.

Steel Industry Wharf No. 2: Conventional General Cargo Wharf. 152 m. long, 24 to 15.6 m. wide. Reinforced concrete wharf with wooden fendering. A mooring dolphin is provided 30 m. N.E. No. 2 Berth is adjacent and extends in a N.E. direction from No. 1 Berth.

Max. size of vessel up to 19,500 tons d.w.t.
Tidal range at berth: Between 2 m. and 3 m.

Nature of Bottom: Mud, clay and some rock.
Vessel can dock/undock at any stage.
Vessel can dock/undock during hours of darkness.
Vessels moor using ship's lines to Harbour Master's requirements.
Pilots used, unless Master holds special exemption. Water available.
Bunkers by Road Tanker only, subject to Harbour Master's approval.
Engines may be immobilized whilst ship is alongside, subject to Harbour Master's approval.
Stores and supplies can be delivered from dock or by launch.

STEVEDORES: Westernport is a class "B" port for stevedoring facilities. Port Waratah stevedores available. Require ETAs of

vessels from Agent. Ordering time for labour: Tuesday – Friday, by 1430 hrs. previous day. Saturday – Sunday, by 1430 hrs. previous Friday. Monday, by 1430 hrs. previous Sunday. All close holidays observed.
CARGO GEAR: No shore cranes. All vessels must comply with Commonwealth of Australia Regulations prescribed under the Navigation Act.
MEDICAL: Four qualified medical practitioners available and 20-bed Nursing Hospital. Agent should receive prior notice of particulars of vaccinations required.
TANKERS:
Crib Point Jetty: (2 Berths, 13 n.m. from Entrance): Berths are State owned and utilised by B.P. (Australia). The approach channel has 14.3 m. below chart datum, swing basin has a diameter of 610 m., and depth of 14.3 m.
No. 1 Crib Point: Capable of accommodating 100,000 ton tankers with a depth alongside of 15.8 m. Shore gangway used at this berth.
No. 2 Crib Point: Capable of accommodating 40,000 ton tankers with a depth alongside of 12.8 m.
Crib Point Terminal General:
Grades Handled – Crude, Black Oils, White Oils, Bunkers.
Tank Height – Crude Tank base 17 m. above sea level.
Full 37 m. above sea level.
Distance of tank farm to Jetty Head – 2 km.
Hose and Pipe-line diameters:
Crude: 4×12 in. diameter hoses. 2×24 in. diameter pipe-lines.
Pumping rate up to 5,000 T/hr. Max. back pressure 150 p.s.i.
Black Oil: 4×12 in. diameter hoses. 1×16 in. diameter pipe-line.
Pumping rate up to 1,500 T/hr. Max. back pressure 150 p.s.i.
White Oil: 2×10 in. diameter hoses. 1×16 in. diameter and 2×12 in. diameter pipe-lines.
Pumping rate 700–1,000 T/hr. Max. back pressure 150 p.s.i.
Bunkers: 1×8 in. diameter hose. 1×12 in. pipe-line.
Pumping rate 200–500 T/hr. Max. back pressure 150 p.s.i.
Reducers: Refinery has reducers from 12 in. to 6 in.
Hoses connected by B.P.
Ballast capacity 30,000 tons.

Long Island Jetty (1 Berth 15.5 n.m. from Entrance):
Berth is State owned and utilised by Esso (Australia). The approach channel has a depth of 14.3 m., swing basin has a diameter of 548 m. and a depth of 14.3 m. There is a depth of 15.8 m. alongside the berth. Berth used for export of Gippsland Crude and L.P.G. Can accommodate vessels up to 100,000 tons. Shore gangway used.

Long Island Terminal General:
Tank Height above sea level – Crude Base 13.7 m. Tank Full 28 m.
L.P.G. Base 7.6 m. Tank Full 36.6 m.
Distance of tank farm to Jetty – Crude 3 km.
L.P.G. 1 km.

Hose and Pipe-line diameters:
No Hoses. "Chiksen" Arms used.
Crude: 2×16 in. diameter Arms. 2×30 in. diameter pipe-lines.
Max. pumping rate 7,250 T/hr. Max. back pressure 125 p.s.i.
L.P.G.: 1×12 in. diameter Liquid Arm. 1×12 in. diameter Vapour Arm. 1×20 in. liquid pipe-line.
Max. pumping rate 1,750 T/hr. Max. back pressure 85 p.s.i. (Refrigerated).
Reducers: Terminal has 8 in., 10 in. and 12 in. A.S.A. Reducers.
Arms connected by Esso.
Ballast, normal capacity 15,000 tons, up to 22,000 tons with 48 hours notice.

Pollution: Cases of discharging dirty ballast or oil spillage will be investigated and vessels are liable to fines and/or detention. Vessels shall not discharge into the waters of the port any part of the contents of their cargo, slop or ballast tanks (this includes clean ballast) or tank washings or bilges which are liable to pollute these waters. Masters shall ensure that pipe-lines and equipment are clean before using them for discharging anything into the waters of the port. Scuppers shall be plugged effectively and no leakage or spillage from any vessel shall be allowed to leak or be swept overboard.

Masters of vessels must seek permission from Harbour Master before pumping anything into the waters of the bay.

The State of Victoria has stringent laws in force concerning the pollution of the sea by oil.

Smoke emissions controlled under the Clean Air Act which will operate under the jurisdiction of the Environment Protection Authority.
Ballast (Tankers): All ballast contained in tanks connected in any way to the vessel's cargo carrying system, is to be discharged to shore tankage.
Fire Precautions: Tankers shall not immobilise main engines whilst alongside jetties. Vessels must observe Port Rule 113 (Dangerous Goods and Oil in Ports) 1974. No oil cargo handling or physical preparation for same permitted unless firewatch tug is on duty.
Tank Washing/Gas Freeing: Permitted alongside subject to approval from Harbour Master. All tank washings to be discharged ashore.
Garbage: Garbage and rubbish will be collected daily from vessels within the Port, all collections shall be a charge on the vessel.
Bunkers: Fuel oil and diesel oils available at Crib Point Jetty only via direct line from refinery. Delivery rate approximately 350 t.p.h. 48 hours notice is required for lubricating oil. Small quantities of marine fuel are available from road tankers at other berths.
Fresh Water: Available, approximate rate 100 t.p.h. Approximate price $1.00 per 4.5 cu.m. Delivered from hydrants at Jetty Heads at all Berths.
Density: Average density between 1025 and 1030 oz. per cu.ft.
Mooring: Vessels secure to oil jetties using ship's lines and shore preventor wires, at all times.
Telephone: Port Authority insists that public telephone is placed on board all tankers. Cost of this service $50, plus cost of all trunk calls.
GANGWAY/DECK WATCHMAN: A shore watchman may be hired. Cost borne by the vessel.
CERTIFICATES:
Clearance from last port.
Ship's Register.
Articles of Agreement.
Official Log Book.
Load Line Certificate.
Safety Radio Certificate.
Safety Equipment Certificate.
Derat. Certificate.
Light Dues Certificate (receipt).
Pratique Certificate from last port (if to be used in this port).
CUSTOMS ALLOWANCES: *(a)* Tobacco: each crew member permitted either 200 cigarettes or 8 oz. of pipe tobacco, or 8 oz. of Fine Cut Tobacco out of Bond. *(b)* Wine and/or Spirit: each crew member is allowed 0.17 gallon of wines or spirits (opened).
IDENTIFICATION CARDS: Required for all nationalities except the United Kingdom, Canada, South Africa, Japan, Israel, Norway, Denmark, Fiji, Hong Kong, Malaysia, and South Korea. Also see "Melbourne".
CONSULS: None.
REPAIRS: Facilities for medium size deck and engine repairs. All repairs subject to Harbour Master's approval.
REPATRIATION: Facilities available.
AIRPORT: Nearest major commercial airport is Tullamarine, 55 miles distance, from which there are frequent interstate and international flights. Airport accessible by road in about 2 hrs. by taxi-car.
TIME: Summer, GMT plus 11 hrs. Winter, March-October GMT plus 10 hrs.
HOLIDAYS: Oil terminals work on all holidays. Steel works observe close holidays.
POLICE/AMBULANCE/FIRE: Police Hastings 791270; Ambulance Frankston 7832222; Fire. Hastings 791345, and Crib Point 839221.
TELEPHONES: Port Authority insists that Public Telephone is placed on board. Cost of this service $50.00, plus cost all trunk calls.
GENERAL: Vessels secure to oil jetties using ship's lines and shore preventer wires at all times.
SERVICES: Licensed Compass adjuster available. Underwriters' Representatives available. Radio and Radar repairs available.
SHORE LEAVE: Crew members permitted shore leave, and launches can be supplied to vessels at anchor, provided vessels have pratique, and have been cleared by customs.
DELAYS: No delays anticipated. Port operates 24 hrs. per day.
AUTHORITY: Ports and Harbours Branch, Department of Public Works, Melbourne; or The Harbour Master, Crib Point.
AGENT: See "Melbourne".

WHYALLA, S.A.: 33.02 S. 137.36 E. (See Plan Book)

LOCATION: Situated on Western shore of Spencer Gulf opposite to and 27 miles by sea from Port Pirie. Open to all Southerly winds, which seldom interfere seriously with operations.
FACILITIES: Jetty for iron ore loading, and dredged harbour with one main wharf for steel and general cargo, and for bulk cargoes of coal, coke, limestone, pigiron, salt, etc. Harbour berths are safe berths.
DOCUMENTS: See "Melbourne".
PILOTAGE: Compulsory except for those vessels whose Masters hold Exemption Certificates. Pilots board 0.5 to 1.5 miles East (105°) of Whyalla No. 1 Ore Loading Jetty. Vessels requiring Pilot should request service in sufficient time enable Pilot be ordered before 1600 hrs. Monday to Friday and should show prescribed signal within at least 10 miles of Whyalla. If delayed berthing, Master informed by radio and recommended anchor at Pilot boarding station (see above).
ANCHORAGES: Quarantine line extends in direction 241° from Black Point to Coast Southwestward of port. Quarantine anchorage shown on Australian Chart AUS.135, lies Southeastward of quarantine line and Eastward of jetty. Anchor preferably North of harbour leads. Vessels should not anchor on harbour or jetty leads, but should anchor, draft permitting, approximately 1 mile North of Outer Fairway beacon. Holding ground good with hard clay and sand bottom.
RESTRICTIONS: Vessels will not be moved within port by Pilot unless at least 10% of max. draft in water beneath keel. Min. clearance 2 ft. Also see "Berthing".
PRATIQUE: Whyalla is a port of first entry. 48 hours' notice of request for pratique required. Pratique granted at anchorage or in berth. Also see "Melbourne".
RADIO: Cable "Hematite Whyalla" also local Agent *(a)* on departure from previous port advising ETA and total cargo for discharge Whyalla (if any); *(b)* 48 hours prior arrival giving ETA; *(c)* 24 hours prior arrival giving ETA; *(d)* advise any alteration in ETA exceeding 2 hours; *(e)* advise estimated draft on arrival fore and aft. These cables necessary in order ensure loading and labour. Cables to be

signed with Master's name. Cables sent outside working hours should be prefixed "Shipserv". In event vessel arriving direct from overseas port requiring pratique, following additional advice to be cabled: No. of crew, nationality, and whether health vaccination certificates required.

VHF: Port equipped with VHF. Service maintained 24 hours a day. Call sign "Whyalla Harbour".

TUGS: All tugs fitted VHF radio. 4 tugs available between 2.5 and 23 tons bollard pull. Wire towropes not to be used unless risk of damage to tug undertaken by ship. Charge for use of tug's lines. Orders for tugs to be made at least 2 hours before required and not later than 1530 hrs. Monday to Friday. Ferry services undertaken to ships at anchorage outside harbour when requested.

BERTHING: Iron ore loading jetty no longer in service, lies near Eastern side of town is 2,273 ft. long with T head formed by 6 dolphins. At night, the dolphin shows fixed white light,

No. 2 Jetty max. length of vessel 820 ft. Depth of water alongside 38 ft. LW. Approach Channel depth 35 ft. LWOST. Swinging basin, depth 35 ft. LWOST.

Stowage factor iron ore, 13–15 ft. per ton. No stevedoring incurred and generally cargo loaded lower holds and no trimming necessary.

Whyalla Harbour: About 1.25 miles to North or iron ore jetty. Entrance Channel 300 ft. wide and approx. 6,000 ft. length. Water depth in Channel and basin 9.5 m. LWOST. Depth of water at Harbour Wharf 10.7 m. LWOST. Berth length 600 ft.

DENSITY: Specific gravity of water approximately 1028 to 1035 therefore vessels must load light.

STEVEDORES: Shift work 21 hours per day on continuous 7 day roster. At least 24 hours notice for labour requirements.

MEDICAL: Resident doctors and hospital available.

FRESH WATER: Available at No. 2 Jetty and all wharves.

FUEL: Bunkering not normally undertaken. Fuel oil, coal and diesel oil available at Whyalla Harbour Wharf in emergencies only.

REPAIRS: Essential repairs only. Consult ship's Agents before maintenance or repairs undertaken.

STORES: Marine and bonded stores can be procured by arrangement with Adelaide. 5 days notice required.

SURVEYORS: Resident surveyors for Lloyds, also Department of Shipping & Transport. Lloyd's agents are Adelaide Steamship Co. Ltd.

GANGWAY/DECK WATCHMAN: Available at ship's option.

REPATRIATION: Air, road and rail facilities available.

AMBULANCE: In event of accident contact Agent or BHP 419 or BHP 2205. After hours BHP 699. St. John's Ambulance Services (tel.: 45–7777) available 24 hours daily.

Aerial Ambulance available for transfer of patients to a metropolitan hospital.

SHORE LEAVE: Crew members permitted shore leave, and launches, at ship's option, provide regular schedule to anchorage – weather permitting.

AUTHORITY: The Broken Hill Proprietary Co. Ltd.

AGENT: Sub-agent of Patrick Agencies, Adelaide.

WYNDHAM, W.A.: 15.27 S. 128.06 E. (See Plan Book)

PORT LIMITS: All waters in the Cambridge Gulf South of a line extending from Cape Dussejour to the summit of Hill 437 on Lacrosse Island, thence to Cape Donett.

CERTIFICATES/DOCUMENTS/HEALTH: See "Melbourne".

PILOTAGE: Compulsory for all vessels entering port except those whose Masters have pilotage exemptions. Pilot boards South of Lacrosse Island in a position with Lacrosse Lt. Ho. bearing 350° distant 5.5 miles. Vessels arriving early should anchor in or near this position. Preferably vessels should arrive at Pilot boarding ground at dawn, as Gulf negotiated during daylight only.

Pilot no longer stationed permanently at Wyndham, but there is usually one there from April to November/December. Early advice to Harbour and Light Department in Fremantle initially is essential. 48 hours prior arrival give ETA to Harbour and Light Department, Wyndham.

All ships awaiting a Pilot should maintain listening watch on VHF Channel 16 at least 2 hours prior to Pilot boarding time, have engines on stand-by at least 1 hour before boarding time, and be ready to proceed in accordance with the Pilot's instructions given by VHF.

The approaches Channel has a min. depth of 6.4 m. LWOST.

ETA: Shipserve "Harbour Master Wyndham" required 48 and 24 hours notice prior arrival. The 24 hours message should be timed to be delivered before 1630 hrs. local time on the day before arrival so that arrangements can be finalised, when possible, in working hours.

Indicate max. draft in the 48 hours notice.

APPROACHES: Generally speaking, it is preferable to arrive at the Pilot station at daybreak. Approach Medusa Bank Buoy and pass Westward (buoy bearing 090° distance 1 mile). Steer 180° until Lacrosse Island lighthouse bears 040°, distance 2 miles. Alter course to 145° to a position with Shakespeare Hill and Cone Hill in transit (086°), Cone Hill distance 4 miles. The course should then be altered to 225°. Course clears Guthrie and East Banks and puts Black Cliff right ahead.

It will be noted that a conspicuous hill (un-named) is sighted immediately behind Black Cliff Point and these together form an excellent lead down this part of the Gulf to a position off Islet Point. From this point onwards pilotage is fairly complicated. There is a submerged wreck off the jetty, which must be considered when berthing and unberthing. Large vessels may only navigate the Hare Channel at half tide or better, as there is a 6.4 m. patch in the fairway.

RESTRICTIONS: The max. length of vessel permitted to navigate the Gulf is 189 m. overall. The Gulf is not navigable during hours of darkness at present.

MAX. SIZE: Length 190 m. draft 8.8 m.

HEALTH: Wyndham is a first port of entry. Masters are required to radio Port Health Authority, Wyndham, not less than 12 hours prior to arrival at pilotage station and giving state of health of the vessel. Examination for pratique is usually conducted after arrival alongside and nobody is permitted ashore until doctor's examination is completed.

BERTHING: There is a jetty of 283 m. in length. The Southern 210 m. having a least depth of 9.14 m., there is slightly less water at the Northern end.

Ordinary moorings are used. A launch is on station to run lines. There is no tug available.

FRESH WATER: Available at both berths. Supply is 10 t.p.h. approx.

STEVEDORES: Working hours: 0730 to 1130 hrs., 1230 to 1630 hrs., 1630 to 1830 hrs. When no extension of work, labour finishes at 1630 hrs.

Labour is organised by the A.E.W.L. WWF conditions prevail, four gangs are available. Prior advice as to labour requirements, hatches to be worked, etc., is of great assistance to stevedores.

CARGO HANDLING: By ship's gear only direct to railway wagons and motor transport. One 12-ton Coles slewing crane and two 5-ton mobile cranes are available, provided sufficient notice is given. A short railway connects the jetty, goodshed, and meatworks. Fork-lift trucks and pallets are used for handling general cargo where suitable.

Bulk Loader on South Berth, grain loading rate 120 t.p.h.

FUEL/TUGS/REPAIRS: None.

TIME: GMT plus 8 hrs.

AUTHORITY: Harbour & Light Department, Fremantle. Local Authority: Harbour Master, Harbour and Light Department, Wyndham.

AGENT: Sub-agent of Patrick Agencies, Fremantle.

YAMPI SOUND, W.A. (Cockatoo Island and Koolan Island): 16.08 S. 123.38 E.

PORT LIMITS: The port limits, which are not marked on the charts of the area extend from a position in Lat. 16° 13′ 13″ South, Long. 123° 32′ 32″ East in a Northerly direction for 10 miles to about midway between Bathurst and Irvine Islands, thence Eastward for 15 miles, thence Southwards to the mainland passing nearly 0.75 of a mile Eastwards of Koolan Island. The Southern limits of the port includes all the intermediate coastline between the Eastern and Western limits as defined above.

DOCUMENTS: The following documents should be prepared prior to arrival if Yampi is the first port of entry to Australia:

Health:

2 copies – Form Q360

Customs:

2 copies – Form M&S 11 (List of Crew)
1 copy – Form 42A (Store List)
1 copy – Form 5 (Articles owned or in possession of Master, Officers or crew)
3 copies – Form C&E (Ports of Call)
1 copy – Form QA4 (Declaration of Ship's Pets)
1 copy – Form QA5 (Shipmaster's Bond) – completed only if pets on board
3 copies – Crew List – unofficial
3 copies – Ship's Bonded Stores – unofficial

The following Certificates are required to be produced if Yampi Sound is the first port of entry to Australia:

Loadline Certificate
Safety Radio Certificate
Safety Equipment Certificate
Safety Construction Certificate
Commonwealth Light Dues Certificate (receipt)
Custom's Clearance from last port

PILOTAGE: Yampi Sound is not a compulsory pilotage area. However, the Company's Port Officer holds a foreign going Master's Certificate, is well versed in local conditions and will act as Pilot for Masters requiring his service. The Port Officer will board at the quarantine anchorage.

As a Westerly wind is quite common, Masters are advised that their vessel should be adequately ballasted prior to berthing operations.

ANCHORAGE: Yampi Sound is a well sheltered deep water port with good all weather anchorages. The quarantine anchorage for Cockatoo Island is located on the Southern side of Cockatoo Island with Cockatoo Island light bearing 060° True, distance 1.5 miles.

Koolan Island is located on the Eastern side of Yampi Sound, with Nares Point bearing 090° True, distance 2 miles.

MAX. SIZE: *Koolan Island:* LOA, 260.7 m. (875 ft.). Breadth, 40.23 m. (132 ft.). Draft (ordinary) 15.54 m. (51 ft.) however loading permitted to 52 ft. on rising tide.

Cockatoo Island: LOA, 225.55 m. (740 ft.) Breadth, 36.57 m. (120 ft.). Draft (ordinary) 12.49 m. (42 ft.). However vessels can exceed the berth depth (42 ft.) by completing loading on a rising tide, to a max. draft of 13.41 m. (44 ft.).

HEALTH: Yampi Sound is a first port of entry to Australia, and valid

Vaccination Certificates are required. The doctor is normally available during daylight hours only, excepting emergencies.

A gangway is required at the quarantine anchorages to allow the doctor and customs to board. A pilot ladder is not acceptable.

RADIO: The port is able to communicate with vessels which are fitted with VHF radio through the normal international maritime channels. The call sign is "KOOLAN ISLAND". A continuous listening watch is not maintained on Channel 16.

The telegraphic address for Yampi Sound is "Ironsteel", Derby, W.A., and Masters of vessels destined for Yampi Sound are required to advise their ETA by radio on departure from the previous port, and at 72 hours, 48 hours, and 24 hours prior to arrival, depending on the vessel's departure from that port.

TUGS: The following vessels are available for shipping movements within Yampi Sound.

Kalibah – 850 hp. Tug – 15 tonne bollard pull
Takora – 350 hp. Tug – 5.5 tonne bollard pull
Tangara – Line launch

Also available for general cargo work is
Wandi II – Landing Barge of 60 tonne capacity

TIDES: Tidal streams within Yampi Sound generally set Easterly with the flood, and Westerly with the ebb tide. At Koolan Island wharf, the tidal stream sets Eastward except for a period from 0.5 hour before to 2.5 hours after high water when the tidal stream sets Westward.

At Cockatoo Island jetty the tidal stream sets Eastward except for a period from 1 hour before to 3 hours after high water when the tidal stream sets Westward.

At spring tides these streams are most pronounced, however may become confused at neap tides.

Further advice on tides and tidal movement can be obtained from the Company's Port Officer.

LOADING ZONES: A Summer Loading zone exists at Yampi Sound with the exception of a Seasonal Tropical Allowance from 1st May to 30th November.

BERTHING:

Koolan Island

The loading berth at Koolan Island consists of a substantial, well fendered wharf 170.7 m. long with the centre located approximately 16° 08.3′ S., 123° 44.3′ E. Additional mooring dolphins are located each end of the wharf to accommodate vessels of up to 130,000 d.w.t. with a maximum beam of 41 m.

The depth of water alongside the wharf is 14.8 m. at LWOST with a tidal range of up to 10.67 m.

The shiploader consists of a travelling, retractable, luffing, conveyor boom capable of loading iron ore at a rate of 3,000 t.p.h., and can move a distance of 118.9 m. along the wharf. Larger vessels may be required to shift along the berth to complete loading operations, the vessel's Master being fully responsible for shifting operations at all times.

Loading is normally continuous with the exception of closed holidays such as Christmas Day, Anzac Day, Good Friday, etc.

General cargo handling facilities at this wharf include a 33 tonne travelling and luffing crane on the Eastern end. Shore labour is available only for use as mooring gangs, and loading and handling of cargo on the wharf only. There are no ship foremen.

Cockatoo Island

The loading jetty at Cockatoo Island consists of 6 dolphins aligned in a 117° T – 297° T direction over a distance of 210.3 m. with its centre, located approximately 16° 06.3′ S. 123° 36.8′ E. Berthing dolphins are located 111.9 m. and 82.9 m. from the centre of each West and East end dolphin respectively. The dolphins are well constructed with a facing of timber fendering from the wharf decking to low water level.

The depth of water alongside is 11.8 m. at LWOST with a tidal range of up to 10.67 m.

The shiploader consists of a fixed, retractable, luffing conveyor boom located between the 2 centre dolphins and is capable of loading iron ore at a rate of 1,800 t.p.h.

Due to the fixed nature of the shiploader, ship's Masters are required to bring each hatch in sequence under the boom, by warping the vessel along the jetty. During these operations Company employees are in attendance for handling the shore end of mooring lines only. The vessel's Master is fully responsible for the warping operations at all times.

Loading is normally carried out from 0600 to 2000 hrs. local time. These hours may be extended to complete loading operations. Loading is not carried out on closed holidays such as Christmas Day, Anzac Day, Good Friday, etc.

General cargo is not handled at this jetty.

MEDICAL: There is a resident doctor on Koolan Island and a small medical centre on both islands. However, the nearest hospital facilities are at Derby, 140 km. from Yampi Sound, and all patients are transferred by aircraft.

SERVICES: Stores, laundry service, fresh water, repair facilities, divers and trading bank facilities are not readily available.

Fresh water can be supplied in an emergency while moderate amounts of stores are obtainable if sufficient notice has been given beforehand. Limited cash can be obtained.

Bunkers are not available, while distillate is available in moderate quantities only after prior arrangement.

The facilities in the townsites of Cockatoo and Koolan Islands are very limited and include a Post Office, Supermarket, Shop, Savings Bank, Open Air Cinema, and a Private Club. There is a swimming pool at Koolan Island townsite.

AIRPORT: There is an airstrip located on both Cockatoo and Koolan Islands and flights by the Company's Charter Aircraft connect with the Australian airline system at Derby, 140 km. from Yampi Sound.

FIRE PRECAUTIONS: There are no fire services available, except the Works Fire Brigade and the safety of the vessel, due to the isolated nature of the berths, remains the responsibility of the Master at all times.

International shore connections are readily accessible at both Cockatoo Island jetty and Koolan Island wharf.

POLICE/AMBULANCE/FIRE: In an emergency the Port Officer should immediately be informed.

Emergency telephone numbers:	Koolan	Cockatoo
Medical	60	20
Fire Brigade	23	32
Port Officer – Home	48	0–48
Office	72	0–72
Policeman		75

TIME: GMT plus 8 hours.

PORT REGULATIONS: Whilst in the Port of Yampi Sound, Masters are respectfully requested to observe the appropriate Quarantine Regulations, particularly in regard to the following matters:—

Garbage, waste oils and tank cleaning compounds should not be discharged into the sea whilst in Yampi Sound.

Rat guards should be used at all times.

SHORE LEAVE: Identity cards are not necessary for shore leave. The townsite on Koolan Island is 10 km. from the wharf and on Cockatoo Island 3.5 km. from the jetty. Transport to the townsite is very limited, and only during working hours. Seamen and visitors are not permitted to walk near the quarry areas, and are cautioned to keep clear of all machinery.

Permission must be obtained before seamen and visitors proceed ashore as blasting in the quarry areas can take place at any time.

GENERAL INFORMATION: The sole export from Yampi Sound is iron ore which is quarried on Cockatoo and Koolan Islands by the Dampier Mining Co. Ltd., a subsidiary of the Broken Hill Proprietary Co. Ltd.

The first shipment of iron from Cockatoo Island was made in 1951, while the first shipment from Koolan Island was made in 1965.

During the year ended November 1975, 3.5 million tonnes of iron ore were shipped from Yampi Sound by 72 vessels. The largest shipments loaded to date have been 105,159 tonnes by the Norwegian vessel "Mosfield" from Koolan Island, and 65,141 tonnes by the Norwegian vessel "Voywi" from Cockatoo Island.

From November to March Yampi Sound is near the Southern extremities of the N.W. monsoonal influence and cyclones can be expected during this period. The effects of cyclones are more prevalent in this area early in this period, however cyclonic conditions have been experienced at Yampi Sound during February/March.

During the season November to March (known locally as the "Wet"), the prevailing winds are Westerly, strong at times, particularly during the afternoon. Rain and thunder squalls are also frequent during the "wet", and Master's are warned to be watchful for storms, as the accompanying winds can be gale force.

The season April to October (known locally as the "Dry") brings a period of very little rain and frequent periods of strong South-Easterly winds during the mornings, giving way to light Westerly sea breezes in the afternoons. No cyclones are likely during this period.

	Koolan Island	*Cockatoo Island*
Depth of Water		
Berth	15.85 m. (52 ft.)	12.80 m. (42 ft.)
Turning Basin	20.10 m. (66 ft.)	16.45 m. (54 ft.)
Channel	20.10 m. (66 ft.)	16.45 m. (54 ft.)
Tide, Rise and Swell		
Spring Rise	10.70 m. (35 ft.)	10.66 m. (35 ft.)
Neap Rise	2.10 m. (7 ft.)	2.13 m. (7 ft.)
Mean Rise	4.63 m. (15 ft.)	4.57 m. (15 ft.)
Swell	Usually Nil	Very little
Keel Clearance	0.91 m. (3 ft.)	0.91 m. (3 ft.)
Draft of Ballast Condition	6.40 m. (21 ft.)	6.40 m. (21 ft.)
Loader Facilities		
Outreach	15.85 m. (52 ft.)	14.63 m. (48 ft.)
Throwing Dist.	4.57 m. (15 ft.)	4.26 m. (14 ft.)
Clear Height From HWOST	45 ft.	48 ft.
Berthing Side	Dependent on tide Portside – ebb Stbd. side – flood	Usually Port-side alongside
Stowage factor	13	13
Angle of Repose	about 25°	approx 25°
Nature of bottom	Mud	Mud
Radio Pratique	Not available	Not available
Time, berthing and unberthing	Anytime	—

AGENT and AUTHORITY: Dampier Mining Co. Ltd., Koolan Island.

Ship's mail and any correspondence should be addressed: c/o Dampier Mining Co. Ltd., Koolan Island, Western Australia, 6733

Azores

HORTA, Faial: 38.32 N. 28.38 W. (See Plan Book)

DOCUMENTS:
3 Crew Lists.
3 Passenger Lists.
For Customs
Arrival Declaration.
Manifest of Cargo for discharge or in transit.
Provisions List.
Request to commence load/discharge.
For Port Health
Deratisation Certificate or exemption.
Health Clearance from Last Port.
For Port Captain
Seaworthiness Certificate.
Certificate of Registry.
Tonnage Certificate.

PILOTAGE: Can be called by two long and one short blasts on the whistle, or by International Code flag "G". Radio contact with pilot station can be made by VHF Channel 16; Phone 2182; via radio station CUG, or in cases of urgency, through the Horta Naval Radio Station CTH.

Pilot launch painted black with "Pilotos" painted on each bulwark. If requested by Master, Pilot will board at entrance of Faial-Pico Channel or Faial-St. George Channel. Otherwise Pilot will board at port entrance. Vessels waiting for pilot must remain 1.5 miles from the breakwater with Ponta de Doca Lighthouse in line with Aeria Larga Lighthouse on Pico Island.

ANCHORAGE: The best holding ground is with the breakwater light in line with the tower of San Francisco church bearing 271°, and with Ilheu Negro in line with Casa Jaoa Catita bearing 208°. Another line of good soundings is in the open Channel dos Ingleses.

MAX. SIZE: For berthing, max. draft 22 ft. Depth in the artificial port is 36 ft. at high water. Depth at buoy moorings: 33 ft. Vessels of any draft can anchor outside the port.

HEALTH: If vessel has not touched any contaminated port, Pilot will haul up signal "TO" and Health Inspector will give free pratique. Master is obliged to send the Maritime Declaration of Health given by the Pilot to shore within one hour together with a Crew List and Cargo Manifest. If vessel has suspected case of fever on board or is coming from a port in a contaminated zone, pratique will only be given after Health Inspector has boarded.

RADIO: Commercial station CUG and Naval station CTH.

TUGS: None available.

STEVEDORES: Gangs are provided by local stevedores syndicate when requested by Master or Agent.

MEDICAL: Doctors and hospital facilities always available.

FRESH WATER: Can be provided by one water barge, capacity 57 tons, cost 38.50 Escudos per ton.

FUEL: Not available.

GANGWAY/DECK WATCHMEN: Police Guard or Coast Guard (Cabos de mar).

OPENING/CLOSING HATCHES: Performed by stevedores.

CUSTOMS ALLOWANCES: Up to 150 grammes tobacco and small allowance wine or spirits for each man.

IDENTIFICATION CARDS: Not required.

CONSULS:
France Germany Netherlands
Greece Italy Norway

REPAIRS: Machinery and small electronic repairs can be effected.

REPATRIATION: Can be arranged.

TIME: GMT minus 1 hour all year round.

HOLIDAYS: 1st January; 10th June; 24th June; 15th August; Corpus Christi; 5th October; 1st November; 8th December; 25th December.

POLICE/AMBULANCE/FIRE: Police tel. 22022; Ambulance 22122; Fire 22333.

TELEPHONES: Can be connected on board vessels berthed alongside.

SHORE LEAVE: Allowed.

AIRPORT: Several flights during the week from Faial Airport, 10 km. from the port, to Lajes airport and International Airport at Santa Maria. There is a daily boat service to Pico and several weekly to other islands.

AUTHORITY: Capitao do Porto da Horta.

AGENT: Casa Bensaude, Importacoes e Exportacoes SARL, Horta, Faial, Rua Vasco da Gama 42. Cables "Bensaude Horta". Tel. 23032/40 (9 lines).

PONTA DELGADA: 37.44 N. 25.40 W. (See Plan Book)

DOCUMENTS:
1 Store List.
4 Crew Lists.
4 Landing Passenger Lists.
4 In Transit Passenger Lists.
2 Manifests of Cargo Being Landed.
1 In Transit Cargo Manifest.
Ship's Register.
Load-line Certificate.
Safety Equipment Certificates (London Convention).
Deratting Certificate.

PILOTAGE: Good deep approach. Harbour Pilot boards 0.5 mile S.E. of breakwater. Radio Harbour Master direct or through Agent ETA 48 hours notice. ETA message to include draft, reason for calling, type of bunker required, fresh water required, oil products needed, nature of repairs and what cargo, if any, aboard.

Pilot station with visual signals tower and radiotelephony, at entrance of port installations. Telephone number 2.35.50. Pilot's motorboat – Pilotos in capital white letters printed both sides hull, as well as flag "P" hoisted during day or 1 red, 1 white light at night.

When necessary, Pilot motorboat will complete identification by flashing word "Pilotos".

Besides usual signals of ICS, Pilots' station, when necessary, will hoist on main signal tower the following:

By Day – Flag "X" of ICS – Wait outside Harbour (for Portuguese or foreign ships regularly visiting Ponta Delgada); Flags "OG" of the ICS – Wait outside Harbour (for all other ships);

By Night – Two green lights (one above the other) – Wait outside the Harbour (for Portuguese and foreign ships).

ANCHORAGE: Outside artificial harbour, in roadstead and off breakwater, anchorage suitable for all ships whose drafts are too deep for admission into artificial port – over 40 ft. depth. Good holding ground.

RESTRICTIONS: Vessel considered adversely trimmed when more than 10 ft. "by the stern" or 2 ft. "by the head".

MAX. SIZE: Up to 38 ft. draft.

HEALTH: The Pilot requests Master to hoist quarantine flag when vessel comes from an infected port, or when sick people carried on board. Port doctor then boards for inspection and nobody allowed to board or leave vessel before completion of inspection.

Animals: Importation and transit of all birds and small animals allowed but valid health certificate and valid rabic vaccination certificate required. All staff and Crew members of vessels arriving from a port officially declared infected by smallpox, not allowed go ashore, unless in possession of vaccination certificate.

RADIO: San Miguel Radio, call sign CUG. Transmitting on 1663.5 kHz. Receiving on 2182 kHz. Radio telephone frequencies 4415.8, 8792.8, and 13175.5.

TUGS: Two tugs, 1,100 h.p. and 3,400 h.p. operated by Junta Autonoma available for assistance during berthing and unberthing.

BERTHING:
No. 1 – Quay for small craft.
No. 2 – West Quay, 1,069 ft. long, min. depth alongside, LW, 20 ft.
No. 3 – Central Quay, 678 ft. long, min. depth alongside LW, 27 ft.
No. 4 – East Quay, 2,023 ft. long, min. depth alongside, LW, 40 ft.
Mooring buoys in depths ranging from 20 to 30 ft.

RADAR/VHF: Harbour radar covers range of 20 sea miles; controls inside harbour waters. VHF location – main signal tower. Call sign – "Pilotos". Operating 24 hours on Channel 16. Range 20 to 25 miles.

Calls must be made on Channel 16 and then shift to Channels 20 or 22 as indicated by Port Operations Station. Channel 13 used for communications between tug, Pilot station, Pilot aboard, during manoeuvres of mooring and unmooring. It should be understood that the Port Operations Station is not to be used for ship's business with Agents or Shippers of cargo.

MEDICAL: Large well-equipped hospital. Santa Casa da Misericordia de Ponta Delgada, telephone number 2.23.22.

TANKERS: Vessels carrying explosives, inflammable liquid or any other dangerous cargoes, before entering port, must hoist International Code Signal "B" at foremast during day and a red light at night. Upon boarding vessel the harbour Pilot enquires from the Master whether there are explosives and any other dangerous cargoes on board. Masters requested to supply accurate information as to quantity and nature in order to enable Port Authorities to select a suitable berth or anchorage for vessel.

Constant Readiness: Vessels carrying dangerous cargoes, while moored, must maintain engines and propulsion machinery in readiness to leave the port under full power, if necessary.

FRESH WATER: Available at all quays ex hydrants.

FUEL: Bunkers are readily available but, for their own convenience Masters should telegraph Agents quantity and type of bunkers required. In order to avoid possible delays to their own and other vessels, Masters are requested to replenish bunkers at the time suggested by their Agents.

GANGWAY/DECK WATCHMEN: Customs Guards are on duty upon the quay and at the entrance of the wharf. Customs guards are also placed on board and those assigned for this duty should be provided with meals (at regular meal times) and sleeping quarters on board.

CUSTOMS ALLOWANCE: Storerooms will be sealed but a reasonable quantity of stores, estimated as indispensable for consumption, may be removed before sealing. This amount should be ready for removal from the storeroom prior to arrival at berth.

CARGO GEAR: Two 6 ton and one 3 ton travelling cranes at all quays. Mobile cranes available at all quays, as well as 7 lift trucks from 2.5-4 tons. Small slipway for vessels up to 200 ft. long. Tender for passenger vessels.

IDENTIFICATION CARDS: No Crew members allowed ashore without landing cards, which are supplied by Agents.

CONSULS:

Belgium	Tel. 2 20 29	Italy	Tel. 2 42 46
Brazil	,, 2 26 38	Mexico	,, 2 27 04
Chile	,, 2 32 26	Netherlands	,, 2 31 94
Denmark	,, 2 28 50	Norway	,, 2 27 83
Dominican Rep.	,, 2 53 90	Panama	,, 2 20 45
Finland	,, 2 35 59	Spain	,, 2 25 02
France	,, 2 41 29	Sweden	,, 2 26 38
Germany	,, 2 39 35	Turkey	,, 2 26 67
Greece	,, 2 41 29	U.S.A.	,, 2 22 16

REPAIRS: Engine or other repairs can be undertaken. Repairs to electric installations, motors and refrigerating systems can also be undertaken as well as repairs to wireless stations (including VHF, radio-telephone equipment, radar, Echo-sounders, direction-finders, gyro-compasses, steering-gear, Sal logs and cinema projectors).

Workshops duly equipped to undertake hull and engine repairs. Divers and equipment also available for some underwater work. Small tugs, motor-launches and lighters. No dry-docking available. A seagoing salvage tug, owned by Junta Autonoma is stationed in the port.

REPATRIATION: Can be arranged.

AIRPORT: 3 km. from Ponta Delgada. Daily flights to Airport of Santa Maria, Lajes Field (Terceira) and Faial by Sata Airlines. Connections with weekly flights of PAA, TWA and Transportes Aereos Portugueses – TAP, to and from Europe and United States or Canada.

TIME: GMT, minus 1 hour. No changes.

HOLIDAyS: 1st January – New Year's Day, 25th April (Liberty Day), June 10th (Portugal Day), Corpus Christi, August 15th, October 5th, November 1st, December 1st, Monday before Ascension Day. Government offices close on afternoon of Maundy Thursday and on afternoon of Christmas Eve. Most firms close on Shrove Tuesday and Good Friday.

POLICE/FIRE/AMBULANCE: Police telephone 22022; Fire telephone 2 23 33; Ambulance telephone 22022.

TELEPHONES: Any ship moored alongside can be connected to the city's telephone network, upon request through the ship's Agent.

GENERAL: Visual storm signals are shown on Main Signal Tower.

SERVICES: Fresh and dry provisions available all the year round.

SHORE LEAVE: Allowed.

REGULATIONS: Ballast: Vessels must arrive with sufficient ballast to permit safe handling.

Ratguards: It is advisable to use ratguards while moored alongside. Scupper Covers: Boards or other suitable devices must be used to cover outlets from lavatory discharges, etc., to prevent fouling of pier or craft alongside.

Garbage: It is absolutely forbidden to dispose of cinders, garbage, or any other refuse inside the harbour or within the territorial waters limit. Non-compliance is subject to heavy fines.

AUTHORITY: Junta Autonoma Dos Portos Do Distrito. de Ponta Delgada.

AGENT: Casa Bensaude, Sarl. P.O. Box 188, Ponta Delgada, St. Michael's, Azores. Telephone: 22201 (6 lines), after hours – 25450 and 25782. Telex: 82162 Gruben P. Cables: Bensaude Pontadelgadaazores.

NOTES

Please also advise Shipping Guides Ltd.

Bahamas

FREEPORT: Bahamas 26.31 N. 78.46 W.

(See Plan Book)

DOCUMENTS:

(a) Inwards:

Description	*Customs*	*Immigration*	*Agents*	*Total*
1. Crew Lists	2	—	1	3
2. In transit Passenger List	2	2	2	6
3. Disembarking Passenger List	2	2	2	6
4. Stores List	2	—	—	2
5. Gift shop inventory	2	—	—	2
6. Crew's Declaration	2	—	—	2
7. Ship's Report Inwards (supplied by Agents)	2	—	—	2
8. Maritime Declaration of Health (supplied by Agents)	1	—	—	1
9. Cargo Manifest for Freeport	4	—	2	6

10. Landing cards supplied by agents to be completed by each disembarking passenger.
11. Baggage Declaration forms supplied by agents to be completed by each disembarking passenger.
12. Clearance from last port will be collected by Customs.
13. Deratisation Certificate should be available for inspection.

If vessel's previous port of call was in Bahamas items (7), (8) and (13) need not be complied with.

When vessel requires Consular Despatch to country such as Venezuela, two extra copies items (1), (4) and (6) should be supplied.

(b) Outwards:

Description	*Customs*	*Immigration*	*Agents*	*Total*
1. Ship's Report Outwards (supplied by Agents)	2	—	—	2
2. List of embarking passengers (if any)	2	2	2	6
3. Outward Manifest Freeport cargo	2	—	2	4

If vessel clearing for another Bahamian port item (1) does not have to be complied with, but copy of next port's manifest required.

PILOTAGE: Compulsory for passenger vessels exceeding 199 gross tons and freighters exceeding 399 gross tons. Pilotage is compulsory for tankers berthing at Borco dock, but vessels calling for bunkers only may anchor and bunker by barge without using Pilot services. However, pilotage recommended. Pilot station located in position in which Freeport light bears 050° true, distance 3 miles. Approaching Freeport, particularly from North West, keep at least 3 miles from shore, and, when off port, remain at pilot station until boarded by Pilot. Pilotage area extends from pilot station to offshore refuelling moorings, anchorage to West of harbour entrance and harbour. Pilots available any time of day or night. Harbour signal station maintains a 24 hour watch for visual and radio signals. Borco on VHF Channel 16 only.

Vessels can communicate by RT on 2182 kc/s., and once they have established contact will normally be asked to switch to one of the following frequencies: 2638 or 2738 kc/s. Vessels can also communicate by VHF Channels 16 and 14. Freeport call sign on all frequencies is ZFP 81 or Freeport Harbour Control. Give ETA 48 hours in advance, with subsequent corrections as necessary.

ANCHORAGES: There is a good offshore anchorage approximately 2,500 feet to the North West from the entrance channel for a distance of 1.5 miles (submarine cable in existence) which is sheltered from Northerly winds. The bottom of the sea is lime and coral rock covered by sand and loose lime.

APPROACHES: The following landmarks are prominent when approaching the port: Borco Refinery 3 chimneys. 369 ft. above mean low water. White with red bands showing three sets of four red lights at night. Visible approx. 20 miles. Bahamas Cement Company storage silos just to West of harbour entrance. Visible approx. 15 miles.

Currents in the area are not predictable and are largely wind induced. Harbour is approached through straight channel 1,800 ft. in length, 300 ft. width and with controlling depth of 30 ft. below mean low water. Turning basin, 2,000 ft. by 1,800 ft. Vessels may enter and leave harbour on 24 hour basis, weather permitting.

MAX. SIZE: *Tanker Berths.*

Berth		*d.w.t.*	*Depth Alongside (MLW)*	*Max. Draft*
No. 3	up to	38,000	50 ft.	40 ft.*
4	" "	55,000	54 ft.	47 ft.*
5	,, ,,	90,000	80 ft.	50 ft.*
6	,, ,,	312,000	87 ft.	83 ft.
7	,, ,,	65,000	53 ft.	40 ft.*
8	,, ,,	100,000	56 ft.	Heading East 42 ft. Heading West 50 ft.*
9	,, ,,	130,000	68 ft.	51 ft.*
10	,, ,,	500,000	92 ft.	88 ft.

*Drafts on berths 3, 4, 5, 7, 8 and 9 are limited by depths over submarine pipe-lines in berth approaches.

HEALTH: Pratique granted by Customs Boarding Officer after Maritime Declaration of Health form completed by Master and Deratisation Certificate examined. Important that vessel should not commence refuelling nor work cargo until cleared. A vessel arriving from another Bahamian port, e.g. Nassau, does not require pratique. If any suspected disease or fever on board, pratique may be withheld, pending examination by Government Medical Officer.

RADIO: Recommended that radio messages giving ETA, etc., be transmitted via Miami Radio.

Tankers proceeding to Borco Installation should transmit the following information within 6 hours of clearing at last port:

(a) name of tanker;

(b) name of port at which the tanker last called;

(c) date and hour of estimated time of arrival at Freeport.

It is imperative that the Master of each tanker shall establish communications with the refinery at least 72 hours prior to the estimated time of arrival, and that the refinery be notified of any change in ETA. Four hours before arrival at Freeport the Master should establish contact by VHF radio and advise on vessels precise estimated time of arrival. Any berthing instructions will be passed to the Master at this time.

Radio Telephone: A continuous watch is maintained by the Control Tower of Freeport (Bahamas) Harbour on 2182 kc/s. and on VHF Channel 16 (156.80 Mc/s).

Working frequencies are:—

Medium Frequencies:

2638 kc/s. — Ship-to-Shore
2738 kc/s. — Ship-to-Shore
2782 kc/s. — Freeport Harbour (Private frequency).

VHF: Channel 14 (156.70 Mc/s).

In addition, Freeport Harbour can communicate on:

2031.5 kc/s. — Miami Marine.
2118 kc/s. — Miami Marine.
2198 kc/s. — Nassau Marine.
2670 kc/s. — Coast Guard

TUGS: NEPCO provide four tugs for assisting in berthing and unberthing. Two of these are of 4,300 h.p. and 2 of 1,000 h.p. In addition there are 2 chartered tugs of 4,000 h.p.

STEVEDORES: Freeport Harbour Company, Ltd., are the sole stevedoring company. Some limitation on labour availability and difficult to obtain more than 2 gangs at any one time. Normal discharging rate 10 tons d.w. per hook per hour. Port Authority operate forklift trucks ranging from 2 to 30 tons capacity. First ETA at least 48 hours prior arrival, to ensure labour booked in time.

MEDICAL: No port medical officers. Persons requiring attention must proceed approximately 7 miles to Freeport's hospital and dental clinic, or to Antoni Clinic or Lucayan Medical Group Clinic which approximately same distance from port area. Advance notice to Agent desirable but not essential.

SPECIALISED CARGO-HANDLING FACILITIES: *Cement:* Bahamas Cement Company own and operate the whole of Basin No. 3 (1,365 ft. by 350 ft. by 636 ft. – depth 30 ft. at MLW), with bulk handling facilities.

Roll-on/roll-off: Basin No. 1: 2 ramps for 2 vessels (passenger/car ferry type) at S.E. end. Depth 28 ft. MLW. Both ramps approx. 4 ft. above MHW. 1 is adjustable.

Basin No. 2: 2 ramps for 5 landing ship type vessels at S.E. end. Depth 15 ft. MLW. 1 ramp 4 ft. above MLW (4 vls.), the other 0 ft. (1 vl.).

TANKER BERTHING FACILITIES: There are 4 off-shore loading platforms (sea islands) situated between 2,500 and 3,600 ft. from the shore line at Pinder's Point. There are 2 berths on each platform making a total of 8 berths which can accommodate tankers ranging in size from 16,000 to 500,000 d.w.t.

Inside the harbour at Dock 1 are facilities for handling smaller vessels, mainly barge loading and import/export of refined products on a small scale. This is the only Mogas import berth for the island.

Borco Dock 1:

The No. 1 Dock area is the centre of Neptow's Operations. Neptow, an affiliated Company of Borco, is responsible for the maintenance and provision of all marine transport associated with the off-shore operation. Neptow provides tug-boats, mooring boats, personnel carriers, pilotage service and bunker barge facilities, the barges being used to bunker and water vessels in the harbour and in the anchorage.

The working length of the dock is 600 ft., it will accommodate vessels up to approximately 18,000 d.w.t. (Deadweight tons) with a maximum draft of 27 ft.

Neptow provide a bunkering service. This service is given to vessels visiting the Port of Freeport, (cruise ships, cargo ships), and to vessels anchoring outside the port solely to purchase, bunker fuel. The barge service is also used occasionally at Borco's marine facilities when it is more convenient to bunker a vessel by barge. Bunker fuel supplied to the above mentioned vessels ranges from diesel oil to heavy fuel oil, blends being made in between to suit individual customer requirements,

Products imported or exported via the No. 1 Dock loading facilities are:—

Imports:
1. Premium Gasoline.
2. Regular Gasoline.
3. Heavy Fuel Oils for Bunkering.
4. Heavy Fuel Oil, to be supplied as bunker fuel to visiting tankships.

Exports:
1. Diesel oil to small craft for inter-island distribution.
2. All grades of fuel oil into barges or tankships when scheduled for delivery to the Out-Islands or the East Coast of U.S.A.

Note: Tankships, except for gasoline imports, normally only use the No. 1 Dock facilities during occasions of extreme bad weather.

Loading Platforms:–The 3 loading platforms which accommodate berths 3 & 4, 5 & 6, 7 & 8 are of fully enclosed, box like type of construction the interior of which contain equipment for the operation of each respective platform.

The platform serving 9 & 10 Berths is of a slightly different design in-so-much that it is of an open type construction with no between decks storage space.

All of the platforms are situated in an elevated position approximately 40 ft. above sea-level and are supported by piling structures sunk into the sea-bed.

The platforms serving berths 3 & 4, 7 & 8 and 5 & 6, 9 & 10 are interconnected by cat-walks which extend in a Northwest/Southeast direction, in line with prevalent weather conditions. The overall lengths of these structures are approximately 2,040 ft. and 3,000 ft. respectively.

Each loading platform is entirely self-sufficient in that they each have their own power supply, fresh water, office and store-rooms, fire fighting and anti-pollution equipment, slop systems, storm water systems and a host of contributary operating equipment. Communication systems amount to P.B.X. Telephones, Magneto Telephones (inter-Jetty communication) and 2 V.H.F. Radio systems.

Two fresh water lines extend from the shore, one to 9 & 10 berths and the other to 3 & 4 berths. Fresh water is then supplied to 5 & 6 berths via 9 & 10, and 7 & 8 berths via 3 & 4. This water supply can also be used to water tankships alongside the platforms.

To enable tankships to be safely secured alongside the loading facilities, each platform and associated cat-walk unit has mooring dolphins with quick-release mooring hooks and integral capstans.

Berths 3 & 4. Situated approximately 2,500 ft. from the Pinder's Point shore-line with a platform size of 94 ft.×100 ft.× 12 ft. in depth. Submarine sea lines available are:–

1×30 in.	Diameter	Crude Oil Line.
2×24 in.	,,	Fuel Oil Lines.
1×20 in.	,,	Diesel Oil Line.
1×20 in.	,,	Kero/Jet Line.
1×20 in.	,,	Naphtha Line.
2×20 in.	,,	Dirty Ballast Lines.
1×18 in.	,,	Bunker Fuel Line.

These pipe-lines terminate at 12 in. Chiksan Marine Loading Arms – Counter balanced and hydraulically powered.

Berths 5 & 6. Situated approximately 3,600 ft, from the Pinder's Point shore-line with a platform size of 100 ft.×144 ft.×12 ft. in depth. Submarine sea lines available are:–

Berth No. 5.

2×30 in.	Diameter	Crude Oil Lines.
1×24 in.	,,	Fuel Oil Line.
1×20 in.	,,	Diesel Oil Line.
1×20 in.	,,	Kero/Jet Line.
1×20 in.		Dirty Ballast Line.
1×18 in.	,,	Bunker Fuel Line.

Berth No. 6.

2×30 in.	,,	Crude Oil Lines.
1×24 in.	,,	Fuel Oil Line.
1×20 in.	,,	Dirty Ballast Line.
1×18 in.	,,	Bunker Fuel Line.

These pipe-lines terminate at 16 in. Chiksan Marine Loading Arms of the same design as on berths 3 & 4.

Also incorporated on berth 6 is a Berthing Approach System which is used by the Pilots as an aid in safely moving vessels on or off the berth.

Berths 7 & 8. This platform was completed and handed over in 1973. Situated approximately 2,500 ft. from the Pinder's Point shore-line with a platform size of 110 ft.×90 ft.×12 ft. in depth.

Submarine sea lines available are:–

2×24 in.	Diameter	Fuel Oil Lines.
1×20 in.	,,	Diesel Oil Line.
1×20 in.	,,	Kero/Jet Line.
1×20 in.	,,	Naphtha Line.
1×20 in.	,,	Dirty Ballast Line.
1×18 in.	,,	Bunker Fuel Line.

There is no crude oil facility available at this berth. Crude oils will be handled by berths 5, 6, 9 & 10 under normal conditions and by berths 3 & 4 if required.

The above listed pipe-lines terminate at 12 in. Chiksan Marine Loading Arms, again similar in construction to the berths mentioned previously. 6 arms service each berth of which 2 are bunker lines and the remaining 4 for product loading.

Berths 9 & 10. This platform, the most recent addition to the marine loading facilities at Borco was completed and handed over in 1974.

Situated approximately 3,600 ft. from the Pinder's Point shore-line with a platform size of 190 ft.×125 ft. (No below deck space) this facility is of a rather different design to the other loading platforms namely:–

The platform is of a completely open design with major operating equipment sited on the top surface. Ancillary equipment such as slop and storm water systems are situated below the platform. Because of its design, equipment is more readily available and build up of hydrocarbon vapours is eliminated.

Other features incorporated within the platform design are:–

1. Weather recording station.
2. Meter (Bunker) proving systems – electronically controlled.
3. Berthing approach system for No. 10 berth which is used by the Pilots as an aid in safety moving vessels on or off the berth.

Submarine sea lines available are:–

1×20 in.	Diameter	Bunker Fuel Line.
1×24 in.		Fuel Oil Line.
1×20 in.	,,	Ballast Water Line.
1×42 in.	,,	Crude Oil Line.
1×30 in.		Crude Oil Line.

As can be readily seen this platform is a crude oil/fuel oil loading/discharging facility only, white oil products are not available. The above stated lines terminate at 10 Chiksan Marine Loading Arms, again similar in construction to those on other platforms. The service per berth as below:–

No. 9 Berth.	1×12 in.	Diameter	Bunker Fuel.
	1×12 in.	,,	Ballast.
	1×12 in.	,,	Fuel Oil.
	2×12 in.	,,	Crude Oil.
No. 10 Berth.	1×16 in.	Diameter	Bunker Fuel.
	1×16 in.	,,	Ballast.
	1×16 in.	,,	Fuel Oil.
	2×16 in.	,,	Crude Oil.

BALLAST: Facilities are provided for discharge of dirty ballast at the tanker jetties. Each jetty is connected by a 20 in. ballast pipe-line. These lines have been tested to 350 lb. pressure and are designed for 150 lb. working pressure.

DENSITY: Salt water. Rise and fall of tide between 3 ft. and 3 ft. 6 in.

FRESH WATER: Fresh water available by pipe-line in the harbour. Average pumping rate 18 t.p.h. per connection with maximum 2 connections in the harbour. Fresh water also supplied by barge to the tanker berths at the rate of about 30 t.p.h.

FUEL: All grades available. 24 hours notice desirable. Bunkering facilities are provided at each tanker jetty. One 16 in. pipe-line provides "C" fuel and intermediate fuel, and one 16 in. pipe-line provides marine diesel and gas oils. Fuel also available to vessels at anchor by barge.

GANGWAY/DECK WATCHMEN: Not necessary as security guards patrol port area 24 hours a day.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

SHIP CERTIFICATES: Deratisation Certificate required.

CUSTOMS ALLOWANCES: 50 cigars or 200 cigarettes or 1 lb. tobacco and one quart of spirits per man.

CARGO GEAR: Currently no cranes based permanently in harbour area. However, mobile cranes can usually be made available, although essential shipowners consult Agents before accepting heavy lifts requiring shore facilities for discharge

CREW IDENTIFICATION CARDS: Not required.

CONSULS: No foreign Consuls Freeport.

REPAIRS: Only minor repairs.

REPATRIATION: Facilities for crew changes and repatriation by air.

AIRPORT: Approximately 4 miles from harbour, served by following airlines: British airways, Eastern Airlines, Air Canada and Pan American Airways.

TIME: GMT minus 5 hours. Summertime, from April to October, GMT minus 4 hours.

HOLIDAYS: No cargo work in the port on following days: New Year's Day; Good Friday; Easter Sunday; Christmas Day. Work ceases 1700 hrs. on day preceding above holidays and commences 0800 hrs. on day after.

POLICE/AMBULANCE/FIRE: Police tel. 352-8333. Police station approximately two miles from harbour, and operates several radio-controlled vehicles. Ambulance tel. 352-6735. Ambulance based at Rand Memorial Hospital which approximately 7 miles from harbour. Fire tel. 352-8888. Fire Station approximately 7 miles from harbour and at present consists of 2 fire-trucks with auxiliary vehicles.

TELEPHONES: Can be placed on board at certain berths. There is a connecting charge.

AUTHORITY: Freeport Harbour Company, Ltd.

NASSAU, Bahamas: 25.05 N. 77.20 W.

(See Plan Book)

DOCUMENTS:

(a) Inwards:

Description	*Customs*	*Immigra-tion*	*Agents*	*Total*
1. Ship's Report Inwards (supplied by Agents)	2	—	—	2
2. Maritime Declaration of Health (supplied by Agents)	1	—	—	1
3. In transit passenger manifest	2	1	2	5
4. Disembarking passenger manifest	2	1	2	5
5. Crew Lists	2	—	1	3
6. Crew Curio List	1	—	—	1
7. Stores List	2	—	1	3
8. Gift Shop Inventory	1	—	—	1
9. Cargo Manifest	3	—	3	6

10. Derat. Certificate – should be available for inspection.
11. Clearance from last port to be given to Customs.
12. Immigration landing cards must be completed by all passengers. (These are supplied by Agents.)
13. Customs Declaration forms must be completed by all disembarking passengers. (These are supplied by Agents.)
14. Cargo Tally books – two per hatch where Nassau cargo is to be discharged.

If vessel's previous port of call was in Bahamas items 1, 2 and 10 need not be complied with. Item 9 – two cargo manifests supplied to Agents should show freight charges in detail.

Note: All non-Bahamian passengers finally disembarking at Nassau must be in possession of return ticket or have proper Bahamas Immigration Entry Permit.

(b) Outwards:

Description	*Customs*	*Immigration*	*Agents*	*Total*
1. Ship's Report Outwards (supplied by Agents)	2	—	—	2
2. List of embarking passengers	2	1	2	5
3. Manifest covering cargo loaded	3	—	3	6

Note: If vessel clearing for another Bahamian port, item 1 does not have to be complied with, but copy of next port's manifest required.

PILOTAGE: Presently no signal station and Masters requested telegraph ETA at least 48 hours in advance with subsequent amendments as necessary to Agents, who will inform Pilots. Pilot normally boards in approximate position one mile North of Western end of Hog Island (Paradise Island). When port closed due to bad weather a red flag will be displayed at Western end of Hog Island by day and red light in same location at night. Vessels may anchor in vicinity of pilot station where depth of water allows. There are three Pilots and boats are clearly marked "Pilot" and display international pilotage signals. Pilots are accustomed boarding by pilot ladder.

ANCHORAGES: Anchorage just off Nassau Harbour extends over area North and East of Western point of Hog Island to approximately half a mile off shore, where it becomes too deep.

RESTRICTIONS: No restrictions apart from adverse weather conditions or excessive draft which may make it advisable to enter on certain state of tide.

MAX. SIZE: No restriction on length or breadth but safe draft is considered 35 ft. Largest vessel to enter harbour to date is QE II. Safe draft cargo pier 25 ft.

HEALTH: Provided vessel healthy Customs grant free pratique on receipt international declaration of health form completed and signed. If any suspected disease or fever on board Master should advise Agent by cable, who will inform appropriate authorities and advise Master clearance procedure. Once vessel obtained free pratique in one Bahamas Port and proceeds another there are no further procedures at next port.

RADIO: Communications can be directed through Nassau Harbour Control, which came into existence in 1974, in an effort to control shipping and movements in and out of the harbour of Nassau.

VHF frequencies used are Channels 6, 9, 14, 16, 12, 68, 73, 74, 79, 20, 65 and 66.

Single Side Band frequencies used are 282.5 – 3,300.0 – 4,139.5 – 8,100.0 – 8, 281.2 – 12,421.0 – 16,565.0 kc/s. Also transmits 2522 Khz, receive 2126 Khz upper sideband.

AM Radio Ship-to-Shore frequencies are 2182 Emergency – 2638 and 2738 kc/s.

TUGS: Tugs normally join vessel at entrance to turning basin. Usual for vessels to provide tow line.

BERTHING: No specific requirements but due to congestion essential that Agent is kept well informed of ETA.

BRIDGES: No bridges affecting entrance to main berths.

STEVEDORES: Master should include in ETA number gangs required and tons per hatch for discharge, as shipping documents do not always arrive in advance. Discharge rate approximately 10 t.p.h. 135 ton mobile crane available.

MEDICAL: Full medical services available. In serious cases requiring immediate attention Agent should be advised so that doctor may board on arrival.

TANKERS: Limited facilities provided for tankers at Clifton Pier on S.W. side of Island. Vessels moor to dolphins offshore and discharge through submarine pipe-line. Vessels proceeding Clifton Pier (unless otherwise advised) should pick up Pilot off Nassau and clear Customs. Only oil imports are for domestic purposes and there is no oil refinery. Max. draft Clifton Pier 36 ft.

DENSITY: 1025.

FRESH WATER: Available Prince George Wharf on old section but not yet provided on new deep water pier recently completed. Rate 10–15 t.p.h. from hose connections on dock. Public Water Department supplies hose end connections. Price approximately $9.55 per 1,000 gals. depending on amount required. No water barges available.

FUEL: No fuelling facilities available with exception of small quantities diesel which may be delivered by Tanker Truck (4,000 gals.) by prior arrangement.

Small tankers can deliver fuel (80,000 – 100,000 gals.).

FIRE PRECAUTIONS: No special requirements. Vessels carrying explosives should notify Agent in advance so that Authorities may be advised.

GANGWAY/DECK WATCHMEN: Vessel to supply own watchman if required.

OPENING/CLOSING HATCHES: Roller hatches usually opened and closed by vessel's crew but older wooden hatches and tarpaulins handled by stevedores.

SHIP CERTIFICATES: Only certificate normally required for inspection is Derat. Certificate.

CUSTOMS ALLOWANCE: Quantity should be reasonably based on individual requirement and length of stay in port. Actual amount is at discretion of Customs Officer clearing vessel.

IDENTIFICATION CARDS: Not required.

CONSULS:

Country	*Status*	*Location*	*Telephones* *Office*	*Telephones* *Home*
Austria	Honorary Consul	Nassau	74258	74258
Belgium	Honorary Consul	Nassau	32371	74233
Canada	Honorary Commercial Agent	Nassau	55591	31305
Cyprus	Honorary Consul	Nassau	24292	36189
Denmark	Honorary Consul	Nassau	42265	42265
France	Honorary Consular Agent	Nassau	32371	74233
	Honorary Consular Agent	Freeport	352-7831/2	373-4611
Germany	Honorary Consul	Nassau	32156-8	51230
Greece	Honorary Vice-Consul	Nassau	24097	52025
Guyana	Honorary Consul	Nassau	35491	34880
Iceland	Honorary Consul General	Nassau	28956	57709
Israel	Honorary Consul	Nassau	28956	34095
Italy	Honorary Consular Agent	Nassau	24416	42013
Japan	Honorary Consul	Nassau	35654	Unlisted
Mexico	Honorary Consul	Nassau	52863	
Monaco	Honorary Consul	Nassau	51166	74050
Netherlands	Honorary Consul	Nassau	28210 22275	22334
Norway	Honorary Consul	Nassau	24614	41112
Peru	Honorary Consul	Nassau	57511	52177
Sweden	Honorary Consul	Nassau	77944 77785	77944
Switzerland	Honorary Consul	Nassau	28349	

REPAIRS: Only limited repairs and requirements should be passed to Agent in advance of vessels arrival.

REPATRIATION: Crew changes can be arranged but accommodation expensive and not always available at short notice.

AIRPORT: Extremely good air services. At certain periods airlines become fully booked and suggested that reservations be made in advance.

TIME: Local time (Eastern Standard Time) 5 hours behind GMT. Daylight Saving Time 4 hours behind GMT applicable 27th April to 26th October.

HOLIDAYS: New Year's Day (1st January); Good Friday; Easter Monday; Whit Monday; Independence Day; Labour Day; Emancipation Day; Discovery Day (12th October); Christmas Day (25th December); Boxing Day (26th December); Cargo can be worked on all holidays except Labour Day and Christmas Day.

POLICE/AMBULANCE/FIRE: Police 24444; Ambulance 22221; Fire 919.

TELEPHONES: No facilities for placing telephones on board.

GENERAL: *(a)* Bonded Stores only available to passenger vessels regularly calling Nassau. *(b)* Passenger Vessels: Is of assistance to Agent to know how many passengers disembarking and how many in transit.

SERVICES: Most specialised services unavailable, e.g. radar, radio, gyro, tank cleaning, compass adjusting. If Agent given sufficient notice arrangements can be made for technicians to be flown from Miami.

SHORE LEAVE: No limitations.

AUTHORITY: Port Director, Port Department, Nassau.

SOUTH RIDING POINT: 26.37 N. 78.14 W.

(See Plan Book)

OPERATORS: Burmah Oil Bahamas Ltd.

LOCATION: The terminal is situated at South Riding Point on the South coast of Grand Bahama Island, about 35 miles East of Freeport.

At a distance of 4,000 ft. offshore, the Sea Island mooring dolphin extremities are positioned thus:

No. 1 Mooring Dolphin: 26° 36′ 43.7″ N. 78° 13′ 49.5″ W.
No. 6 Mooring Dolphin: 26° 36′ 46.7″ N. 78° 13′ 33.6″ W.

DOCUMENTS: Incoming:

Prepared by Ship:

3 copies of Declaration Form Y14.
3 Crew Lists.
2 Stores Lists.
2 Crew Declaration forms.
4 copies of Bills of Lading.

In addition the ship will have to supply a clearance from last port of call, Deratization Certificate, vaccination lists and the usual ships papers viz: Register, Safety Radio, Safety Equipment, Loadline Certificate. Valid Certificate of Civil Liability in respect of oil pollution. Oil Record Book must be up to date and available for inspection.

Prepared by Agent:

1 Copy of Maritime Declaration of Health.
2 Copies of Inwards Report.

Customs and Immigration: After pratique has been granted, an immigration and customs inspection is carried out. The Master will be required to furnish particulars including:

(a) Name and nationality of vessel.
(b) Last port or ports of call.
(c) Nature of cargo.
(d) Number of crew.
(e) Number of passengers.

(f) Port of destination and name of Agent.
(g) Number of days since departure from last loading/unloading port.

Copies of the crew list and stores remaining on board will be required before clearance is granted.

Masters of vessels must take every precaution to ensure that no drugs, wine or alcoholic liquors are supplied, sold or conveyed to any person at the terminal.

Outgoing:

Prepared by Agent:

4 Copies of Outward Cargo Manifest.
2 Copies of Outwards Report.
Port Clearance Certificate.

In order to comply with Immigration regulations, crews should be checked before sailing and any missing seaman reported to the Agent. In the case of seamen left ashore for any reason, Masters are requested to furnish a letter accepting responsibility for all expenses incurred, advances if any, and instructions for repatriation.

Documentation and Clearance:

On completion of loading/unloading, vessels will normally be unberthed immediately and stand off to await completion of harbour formalities and cargo documents.

If a berth is not required immediately after loading/unloading has been completed, vessels may be allowed to remain alongside the berth until final documentation and formalities have been completed.

Early Departure Procedure (EDP) is available on request.

PILOTAGE: Berthing and operational instructions will be given by Burmah Control on vessel's arrival at South Riding Point.

A vessel will be deemed to have arrived when in a position, 3 miles South of the sea island and in this position the Berthing/Loading Master will board from a tug.

Before a vessel is allowed to proceed the Master will be required to sign the following forms:

(a) Conditions of use of sea berths and inner harbour at South Riding Point.
(b) Tug Requisition. The Master will also be provided with copies of the Fire and Safety Regulations and a Ship/Shore Safety Check List Form.

APPROACHES: Vessels approaching South Riding Point from the Eastern entrance of Northwest Providence Channel are recommended to make departure from Great Stirrup Cay Lighthouse Gp. Fl. (4) 15 sec. 14m. and head directly for South Riding Point Terminal.

Preliminary extensive soundings by U.S. Hydrographic Department indicate no underwater obstructions up to 100 fathom line within Northwest Providence Channel.

Landmarks: Conspicuous towers are sited adjacent to South Riding Point Terminal in the following positions:

1. Position: 26° 36′ 40″ N., 78° 20′ 51″ W. Steel framework tower painted red and white, 175 ft. above sea level. Light: Air Occ. R. 4 sec. 1 F.W. 2 F.R. vert.
2. Position: 26° 36′ 51″ N., 78° 19′ 25″ W. Steel framework tower painted red and white, 407 ft. above sea level. Light: Air Qk. Fl. R. 2 F.R. vert.
3. Position: 26° 37′ 06″ N., 78° 18′ 47″ W. Steel framework tower painted red and white, 211 ft. above sea level. Light: Air Occ. R. 8 sec. 1 F.R. vert.
4. Position: 26° 37′ 44″ N., 78° 14′ 20″ W. Steel framework tower painted red and white, 241 ft. above sea level. Light: Air 2 F.R. vert.
5. Position: 26° 42′ 44″ N., 78° 09′ 27″ W. Steel framework tower painted red and white, 270 ft. above sea level. Light: Air Occ. R. 3 sec. 1 F.R. vert.

The F.6M. light exhibited from a white painted wooden mast close East of High Rock Settlement in position 26° 37.3′ N., 78° 16.1′ W. is kerosene lit and is therefore unreliable.

A conspicuous parabolic dish antenna is situated in position 26° 37′ 03″ N., 78° 17′ 58″ W. The antenna has a face diameter of 85 ft. and maximum height above sea level is 134 ft.

The large buff-painted oil storage tanks are visible behind the sea island. The terminal frontage is backed with pine trees and scrub.

Lights:

A light, Fl.R. 3 seconds, is exhibited from a height of 140 ft. above sea level on top of the sea island control building on the central platform, whilst Nos. 1 and 6 mooring dolphins are marked by quick flashing red lights.

Two leading line (range) towers mark the 300 ft. wide approach channel centre line. Lights with clear lenses, each 2.5 seconds flash, 0.5 seconds eclipse, are exhibited from the top of the towers, whose heights are 25 and 35 ft. respectively.

Buoys:

Red and Black Buoys mark the outer channel entrance to the inner harbour whose light characteristics of red and green respectively are each 2.0 seconds flash, 2.0 seconds eclipse.

Four international orange buoys with quick flashing white lights mark the contour of 50 ft. sea bed between the sea island and the shore, in the following positions:

No. 1 Buoy	26° 36′ 12″ N.	78° 15′ 03″ W.
No. 2 Buoy	26° 36′ 41″ N.	78° 14′ 07″ W.
No. 3 Buoy	26° 36′ 49″ N.	78° 13′ 50″ W.
No. 4 Buoy	26° 36′ 56″ N.	78° 13′ 23″ W.

ANCHORAGES: Three white buoys mark the seaward boundary of a designated anchorage area in the following positions:

West Anchorage Buoy: Quick Flash (Green) 26° 35′ 51″ N. 78° 17′ 27″ W.

Mid Anchorage Buoy: Quick Flash (White) 26° 35′ 57″ N. 78° 16′ 19″ W.

East Anchorage Buoy: Quick Flash (Red) 26° 36′ 00″ N. 78° 15′ 33″ W.

These anchorage buoys are laid in 15 fathoms and vessels wishing to anchor should drop their anchors in the transit line of the buoys which will provide ample swinging room for typical shuttle vessels of up to 100,000 tons d.w.t., in ballast conditions. No attempt should be made to anchor Eastward of the East Anchorage Buoy.

Whilst holding ground is considered good and is of sand, limestone and soft coral, vessels should maintain their engines at short notice readiness, especially during periods of strong onshore winds.

In all cases, vessels wishing to anchor should contact the duty Berthing/Loading Master, who will advise on anchorage procedures and whose services are available for pilotage on request and at operational convenience.

Anchorage or the lowering of anchors is prohibited at the sea island berths.

Vessels wishing to stand off until berth readiness are recommended to use the Westerly aerial tower (26° 36′ 40″ N. 78° 20′ 51″ W.) as Westerly boundary of standing off ground in order to avoid congestion with Freeport traffic.

HEALTH: On completion of mooring after the gangway is in place, health authorities will board the vessel and grant pratique, subject to no infectious diseases having been reported on board during the voyage.

RADIO: Vessels loading for South Riding Point should communicate ETA date to the terminal immediately after clearing loading port.

The terminal is linked to Bahamas Telecommunications Company (BATELCO) which in turn is linked to Nassau Marine (Identification VPN2).

Variations of this original ETA date should be communicated throughout the voyage.

72 hours prior to arrival at South Riding Point, Masters are requested to inform the terminal of details of cargo, maximum draft, manifold connections, quantity of ballast and deballasting time when applicable. The Master should also directly inform his agent of medical, repairs and travel requirements.

24 hours prior to arrival, Masters should confirm or amend previous messages.

Circumstances may arise where loaded VLCC's may be requested to arrive at times and dates so as to allow free and unimpeded access through Northwest Providence Channel entrance direct to a planned berth vacancy at the terminal.

Vessels proceeding to South Riding Point Terminal to load, should communicate their ETA immediately upon clearing departure port and confirm or amend this information 24 hours prior to arrival.

VHF: Station Burmah Control located at the terminal is equipped with VHF radio maintaining continuous watch on Channel 16. After making successful contact, vessels will be required to change to Channel 14, where information will be exchanged regarding berthing, manifold connections, quantity of ballast and deballasting time required.

The terminal is also equipped with approved explosion proof VHF walkie-talkie radio sets and vessels will have this additional communication with the terminal after boarding by the Berthing/Loading Master.

TUGS: 4×4,200 h.p. diesel tugs will be stationed at the terminal. Each tug has a bollard pull of 45 tons.

All tugs are equipped for fire fighting and can deliver water at the rate of 2,000 gallons per minute through direct or fan spray nozzles. The tugs have foam making and oil dispersant equipment.

The tugs are owned and operated by Nassau Towing Company.

Small Craft: The terminal has one diesel engined personnel/general purpose carrier for up to 25 persons and three line handling boats. When not in use by terminal personnel the carrier is available for hire.

Small Craft Landing: A landing is situated on the West side of the platform of the oil berths and there are additional landing stages at mooring dolphins Nos. 1 and 6.

BERTHING/UNBERTHING: *Ballast Water:* Ballast water can be received in the terminal oil and water separation tanks through one of the submarine or onshore lines at rates of up to 5,000 t.p.h. On no account may ballast water be otherwise discharged in territorial waters.

Whilst the amount of ballast carried is at the Master's discretion, vessels are requested to arrive ready for berthing in the following approximate ballast conditions:

30,000 – 50,000 tons d.w.t.:	Forward draft 18′	Aft draft 24′
50,000 – 75,000 tons d.w.t.:	Forward draft 20′	Aft draft 28′
75,000 – 100,000 tons d.w.t.:	Forward draft 24′	Aft draft 32′

During ballast operations at the berths, strict observance of rules and regulations governing the opening of sea valves is necessary and in correct sequence with ballast pump commencement to eliminate the risk of oil spills. Vessels may be required to ballast concurrent with discharge and throughout all cargo operations, maintain draft and trim conditions consistent with prevailing weather conditions, on the advice of Berthing/Loading Master.

Tugs: Tank lids and openings should be securely closed before tugs are made fast. Tug utilization in berthing operations will be as required by the Berthing/Loading Master who will meet the vessel in position as directed off the sea island.

Masters of calling vessels are reminded of their obligation to comply with statutory Pilot ladder rules and associated safe access regulations.

Mooring System: The Berthing/Loading Master will advise the Ship's Master of minimum mooring requirements.

The berths have double and triple quick release hooks of 150 and 100 tons capacity. Mooring and berthing dolphins have electrically-operated capstans with 2 ton line pull at 100 ft. per minute in association with mooring assemblies.

Berthing Limitations: Various combinations of wind, sea and tidal conditions, also the size, length, ballasted trim and handling qualities of the vessel can affect the decision to berth a vessel at the terminal. All these factors have to be evaluated before a berthing decision is made.

Ship Connection: The positioning of the vessel's deck manifold in relation to the loading arms on the berth must be carried out to a close tolerance to the requirements of the Shift Superintendent or his deputy and as directed by the Berthing/Loading Master.

Upon completion of berthing, the Berthing/Loading Master will confirm the crude oil/ballast operations with the Master or Chief Officer and loading arm connection will be made to ship's manifold by the sea island crew.

Oil measurement representatives will attend to ullaging and sampling and/or inspection of cargo tanks in vessels discharging or loading and the Berthing/Loading Master will certify that the vessel is ready in all respects for cargo/ballast operations.

Unberthing: On completion of all measurement/inspection processes by the oil measurement representative in company with the appointed Ship's Officer, the vessel will vacate the berth.

Tug attendance and numbers will be dependent on weather conditions and on the advice of the Berthing/Loading Master.

BERTHING FACILITIES: The sea island has two berths interconnected for tanker to tanker transfer and to the shore tanks and inshore berths by 2×36 in. diameter submarine lines.

The island is 1,470 ft. long with a central platform 48 ft. above datum and 3 mooring dolphins 25 ft. above datum on each side.

The berths are equipped with a Sonar Doppler system for docking assistance with clock meter display indicators and associated lights showing distance off berth and speeds of approach. Current meters are sited on the sea island together with meteorological instruments, television surveillance and public address system.

There are 4 fixed and 4 oscillating foam/oil dispersant monitor units on the platform.

The berths have a sacrificial anode cathodic protection system and ships that have an impressed voltage cathodic protection system should it turn off in the vicinity of the sea island.

Berth No. 1: Tankers of 50,000 to 440,000 d.w.t. can dock at this outer berth which is equipped with a self levelling and articulated gangway and 4×16 in. diameter Chicksan loading arms with quick release couplings in sizes 16, 14 and 12 in. diameter.

Water depth at the berth is 100 ft.

Berth No. 2: Tankers of 35,000 to 100,000 d.w.t. can dock at this inner berth which is equipped with a self levelling and articulated gangway and 4×12 in. diameter unloading/loading arms with quick release couplings in sizes 12, 10 and 8 in. diameter.

Water depth at the berth is 85 ft.

Inshore Berths: Two berths now available, presently restricted to 710 ft. L.O.A. and 36 ft. max. draft. Each berth equipped with Loading Arms. "A" Berth (3), "B" Berth (4) 12 in. diameter with quick release couplings in sizes 12 in., 10 in. and 8 in. Shore gangway provided. All vessels programmed for Inner Harbour must arrive with minimum ballast condition – 18 ft. (Forward) and 24 ft. (Aft). Daylight berthing/unberthing only.

Small Boat Harbour: This harbour is at the S.W. corner of the inner harbour and has a water depth of 25 ft. The harbour is used by the Company's tugs and small craft.

LOADING/UNLOADING: The Berthing Master also fulfils the function of Loading Master and is on duty at the Sea Island at all times.

Procedure: Loading or discharging shall not commence until the Master or Chief Officer has informed the Shift Superintendent or Berthing/Loading Master that all necessary valves are open, that the vessel is in a proper condition to discharge or receive cargo and that all regulations are being and will be observed.

Pumping Rates: Very high unloading and loading rates of up to 15,000 t.p.h. and 6,000 t.p.h. respectively at one berth can be achieved at the terminal and in view of these high rates it is absolutely essential that careful supervision is exercised by officers of vessels and by terminal staff while pumping operations are in progress.

Control: A responsible ship's officer is required to be on duty continuously. The Berthing/Loading Master is responsible for all shipping movements and cargo transfer. The Shift Superintendent is responsible for the implementation of all oil movements.

The terminal operators in the control buildings offshore and onshore continuously monitor the cargo transfer rates and status of the onshore tanks or shuttle tankers receiving cargoes direct from VLCC's. The Ship's Officer will be advised immediately of changes necessary in the pumping programme.

The Terminal Operator in the offshore control room will activate all cargo movements from the tanker's manifold to or from shore tanks/receiving shuttle tankers.

Mooring Lines: It is the responsibility of the Ship's Master to ensure that all mooring lines are kept tight. Berthing Masters and terminal operators will constantly check a vessel's moorings. Berthing Masters at any time may direct lines to be heaved tighter or slackened off as circumstances warrant.

Tension Winches: When a vessel is fitted with tension winches, the latter must be set to manual operation and the brakes securely applied.

Spills and Pollution: If at any time an overflow of crude oil occurs loading/unloading will be suspended immediately and will not be resumed until the oil is removed from the deck of the vessel and/or from the surface of the sea and any damage is repaired and no further danger exists.

The responsibility for any oil entering the sea due to a burst pipe or hose or overflow on or from the ship must rest with the vessel concerned, which must accept liability for all claims for damage likely to arise as a result of such spillage.

It is stressed that during loading operations the terminal control will immediately slow-down the loading rate on receipt of a request from the Ship's Officer in charge of loading.

Similarly during unloading operations the Ship's Officer must advise terminal control of all changes in offloading rates so that action as necessary can be taken at receiving vessels or shore tanks.

All major spillages of oil must be reported immediately to the Berthing/Loading Master or Shift Superintendent either of whom will advise the Control Operator to contact the Fire and Safety Officer who will mobilize men and equipment to take appropriate action.

If the spill is due to faulty equipment or material on the vessel or to negligence on the part of ship's personnel, the terminal shall be indemnified for any expenses incurred in connection with the preventive action taken.

Minor Spills: Spillage trays or other receptacles should be placed under the flange connection at the vessels manifold and under any leaking joints or valves. Oil absorbing material in suitable quantity should be placed at strategic places where leaks or minor spills are liable to occur.

FRESH WATER: Not available.

FUEL: Not available.

Arrangements are in hand for the supply of lubricants on an emergency basis and Masters will be advised when supplies are available.

MEDICAL: The Rand Memorial Hospital in Freeport is open on a 24-hour emergency service and two medical clinics, Lucayan and Antoni are open during regular office hours.

TIME: Bahamian Standard Time is 5 hours behind GMT.

REPAIRS: Facilities for minor repairs to electrical, radio and mechanical equipment are available in Freeport but should these be required Masters should give as much advance notice by radio as possible.

TELEPHONES: The sea berths have a telephone connection to the shore and to the Freeport exchange.

STORES: The terminal cannot supply provisions of any description but it may be possible through local contractors to arrange for small quantities of fresh provisions from cold storage if at least 72 hours notice of requirements is given. Almost all food in Grand Bahama is imported from the United States.

LAUNDRY: Limited services are available in Freeport but because of the distance from the terminal (35 miles) and the relatively short time at berths, Masters are advised not to depend on such services.

WEATHER: From November to May, average temperatures in the 70's Fahrenheit prevail, with low humidity and little rain. From June to October, average temperatures rise into the 80's with relatively high humidity and rainfall of between 5 and 9 in. per month.

SEA CONDITIONS: Prevailing winds are concentrated from N.E. through East to South predominantly up to force 3, whilst winds in excess of force 5 occur in frequency over 10% of the year, are of short duration, usually in association with squalls, and seldom last longer than 24 hours.

Sea and swell conditions in excess of 6 ft. occur on average up to 40 days of the year.

Tidal ranges above Mean Lower Low Water Springs, which is chart datum for Bahamian waters are as follows:

High Water		*Low Water*	
Mean Spring	Mean High	Mean Spring	Mean Low
3.6 ft.	3.4 ft.	0.6 ft.	0.9 ft.

Currents in terminal vicinity run predominantly East and West, seldom exceeding 1 knot.

Bahrain

MINA SULMAN: 26.12 N. 50.37 E. (See Plan Book)

TRAVEL TO SAUDI ARABIA: See "Sitra".

DOCUMENTS:
International Declaration of Health.
5 Crew Lists.
Ship's Report (given by Customs on arrival).
Valid Smallpox Vaccination for all crew members.
Agents to submit cargo manifest 3 days before vessel's arrival.

Exports to Bahrain: Shipping documents for exports to Bahrain should include a certificate of origin bearing the stamp of a Bahrain embassy or consulate, where such representation does exist. Alternatively the stamp of any other Arab embassy or consulate will be acceptable.

Abeyance with the above regulation will help process the clearance of goods without delay.

PILOTAGE: Mina Sulman Pilots board either at Sitra Anchorage (see "Sitra") or by special arrangement at Outer Middle ground buoy. Pilotage compulsory except for Naval vessels and small locally-owned craft whose Masters are familiar with the port and control.

Port equipped with 5 tugs, 3 of 800 h.p., and 2 of 1,600 h.p., 3 pilot cutters and a number of mooring launches and work boats.

Pilot cutters mostly black with white-painted wheel-house and cabin accommodation.

ANCHORAGE: Normal anchorage in vicinity of No. 27 buoy. Approximate position Lat. 26° 10′ N., Long. 50° 47′ E. Sitra anchorage now restricted anchorage and may only be used by special permission of Port Authorities.

MAX. SIZE: Vessel up to 650 ft. may enter port subject to tide. Depth of channel 9.75 m. New berths dredged to 10.9 m. Finger pier, depth 30 ft. (9.1 m.).

HEALTH: Port Health Authorities board vessel on arrival at berth alongside Deep Water Jetty and grant pratique.

RADIO: Vessels intending call Mina Sulman should advise Agents via Bahrain Radio, call sign A9M, their ETA, draft, hatch distribution and any other requirements, giving as much notice as possible.

VHF: Vessels equipped with VHF should, when within range, contact Mina Sulman Harbour Office on Channels 6 or 16 which have frequencies of 156.30 and 156.80 respectively.

TUGS: Will usually join vessel between Nos. 7 and 8 Channel Buoys during final approach to Deep Water Jetty.

BERTHING: Finger pier 800 m. long, berthing on both sides with 10 berths each of 150 m. in length for vessels up to 9 m. draft. Four general cargo berths at new development each 200 m. in length with depth of 10.9 m.

Two container berths each 200 m. in length and 10.9 m. depth will be in operation early in 1979. Container berths will have two container handling gantry cranes 30.5 tons capacity with 38 m. outreach.

Berths for coastal vessel, length of quay 285 m. with depth of 7 m.

Small Ro-Ro ramp for vessels up to 5.5 m. draft. Width of ramp 15.5 m.

GRAIN HANDLING: Two portable pneumatic suction/blowing units are used. Capacity 75 t.p.h. each. Wheat is discharged into 20-ton trailers, which takes about 8 to 12 minutes for each trailer.

MEDICAL: Upon application to ship's Agent, the medical examination of crew members can be arranged. Personnel will either be sent to private doctor or to Public Health Department as circumstances dictate. Serious cases will be referred to government hospital doctor.

FRESH WATER: Well water available and can be delivered on berths at Deep Water Jetty at rate of approximately 20 t.p.h. per hose. Fresh water also available by barge with capacity of 300 tons.

FUEL: Bunkers available Mina Sulman and provided by barge of 8,700 barrels capacity, which is owned by the Bahrain Petroleum Company. All usual grades of commercial oil available.

GANGWAY/DECK WATCHMEN: Not customary to employ deck watchman.

IDENTIFICATION CARDS: These cards necessary for any crew member wishing to proceed ashore. Identification card is surrendered to Immigration Authorities at main entrance to port in return of a pass. On return to port, the pass is surrendered and seaman's identity card returned to him.

REPAIRS: Good facilities for both hull and engine repairs which can be effected by the two principal slipway companies. Facilities exist to receive single vessels of 1,000 d.w.t., and a tower crane capable of a 15 tons lift at 40 ft.

DRY DOCK: Arab Ship Repairing Yard (ASRY) was commissioned in 1977. ASRY has the capacity to drydock vessels up to 500,000 d.w.t. and other repair facilities. Vessels calling for drydock or repairs should contact ASRY on VHF Channel 16, 72 or 74. Immigration, Customs and Health formalities as for Mina Sulman. ASRY also provides facilities for discharging slops.

Vessels drydocking at ASRY are exempted from payment of port dues and light dues.

REPATRIATION: It is possible for whole crews or just individual crew members to join or leave vessels at Bahrain. As much notice as possible should be given to Agents to enable arrangements to be made for their reception, hotel accommodation and transportation.

AIRPORT: Bahrain International Airport regularly served by main international airlines, with frequent services to Europe, U.S.A., Far East, and Australia. Also frequent inter-Gulf flights.

TIME: GMT plus 3 hours.

HOLIDAYS: Public holidays in accordance with Muslim calendar as follows: 3 days during Ied Al Fittr; 3 days during Ied Al Adha; 3 days during Muharram; 12th R'Awal Prophet's Birthday; Accession of H.H. The Ruler, 16th December; 25th December; 1st January. Apart from 6 days, two during each of the religious anniversaries, all holidays will be worked in the port as on Fridays, the Sabbath day.

TELEPHONES: Can be provided at each berth on Deep Water jetty at charge of BD's 1,200 fils per day per phone (approx.). In case of emergency, dial 79 for ambulance; 77 for Duty Police Officer; 75 for Fire Brigade.

SERVICES: Bahrain well provided for services including repairs, stores and supplies, fumigation surveys, adjustments, radar and gyro compass repairs, professional diving, and underwater brushing.

SHORE LEAVE: Permitted.

AUTHORITY: Assistant Under Secretary Customs and Port Affairs.

AGENT: Gulf Agency Co. (Bahrain) WLL., P.O.B. 412, Manama, Bahrain. Cables: "Confidence", Tel: 254228, 254938. Telex: 8211 (A/B "GAC BN"). After office hours Tel: 252011, 691758.

SITRA: 26.09 N. 50.40 E. (See Plan Book)

TRAVEL TO SAUDI ARABIA: Travellers are permitted to travel from Bahrain to Saudi Arabia, *provided: (a)* They hold a valid International Vaccination Certificate showing that the holder was immunised at least 5 days before travelling to Saudi Arabia, but not more than 6 months previously; *(b)* that any traveller proceeding to Saudi Arabia from Bahrain should have taken the prescribed doses of Tetracycline over the 48-hour period immediately before travelling. The fact that the passenger has taken the Tetracycline should be certified by the Bahrain Health Department.

PORT LIMITS: A vessel is normally considered to be an "arrived vessel" when the vessel passes due South of Sitra Beacon, unless she has been instructed to anchor in the deep water S.E. of No. 27 Buoy.

The Port of Sitra is an open roadstead situated on the N.E. side of Bahrain. Some protection is afforded to the anchorage during the prevailing N.W. wind by Muharraq Island and outlying reefs which lie to the North of the anchorage.

During Southerly winds some protection is also afforded by outlying reefs and sandbanks which lie to the Eastward of Bahrain Island. Prolonged winds from an Easterly or S.E. direction make the anchorage uncomfortable for small vessels.

OPERATORS: The Bahrain Petroleum Co. Ltd., Awali, Bahrain. Cables "Bapco Bahrain".

DOCUMENTS: Crew list 3 copies. Passenger list 3 copies. Customs Declaration 2 copies. Health Declaration 2 copies. Log Book for Inspection by Customs Officers.

Cargo and bunker documents are delivered to the vessel as soon as possible after the vessel has been cleared on quantity and quality. Delays are sometimes incurred. As a result, the Company reserves the right to unberth a vessel and deliver documents by launch so as to minimize berthing delays to subsequent vessels.

Early Departure Procedure (E.D.P.) is available on Master's request.

PILOTAGE: Not normally provided between Bahrain Light Vessel and Sitra Anchorage. For vessels navigating Sitra Deep Water Channel with drafts in excess 40 ft. Mooring Master boards vessel on arrival Sitra Beacon if berth available. If Pilot does not approach vessel arriving, vessel should anchor in anchorage. Pilot will board from a tug or launch exhibiting International Pilot flag by day and lights by night.

Company Mooring Masters will advise and assist vessels in berthing, unberthing, mooring and navigating in the port of Sitra, and shall, in all cases, be present on board vessels coming alongside or leaving Company and Alba wharves.

The services of the Company Mooring Masters are mandatory for berthing and unberthing, and are provided without charge.

If no berth is available, vessels should anchor in the prescribed anchorage until such time as a berth is available. Every endeavour will be made to give the Master berthing instructions prior to the boarding of the Mooring Master, and to this end, Masters are requested to maintain a continuous watch on the VHF. In cases where it is impossible to give prior berthing instructions, the Master and Chief Engineer are requested to co-operate with the Company by getting the vessel's engines ready for use with the least possible delay.

APPROACHES: Without accepting any responsibility, following suggestions made by Bapco marine staff, for Masters not familiar with approaches to Sitra. Courses inbound will depend upon draft. Vessels wishing utilise "Deep Water Departure Channel" should follow reciprocal of courses described for "Deep Water Departure Channel". Vessels with drafts less than 30 ft. requested to *Keep Clear* of this channel, and use "Sitra Inward" Buoy as follows.

(a) *Under 30 ft. Draft*

- (i) From position (Lat. 26° 27.8′ N. Long. 51° 00′ E.) 2.5 miles S.E. of No. 3 Beacon (Lat. 26° 28.5′ N. Long. 50° 57.4′ E.) course should be set to position 0.75 mile North of "Sitra Inward" Buoy (Lat. 26° 21.2′ N. Long. 50° 49.7′ E.) leaving "Caisson Wreck" Buoy (Lat. 26° 24.2′ N. Long. 50° 52.7′ E.) at least 0.5 mile to starboard.
- (ii) From position 0.75 mile North of "Sitra Inward" Buoy course should be set towards No. 16 Buoy (Lat. 26° 12.9′ N. Long. 50° 46.3′ E.).
- (iii) When vessel has reached a position with No. 16 Buoy, 1.5 miles ahead, course can be adjusted to due South, passing westwards of "Vidal" Buoy (Lat. 26° 14.1′ N. Long 50° 47.2′ E.)

until "Sitra Beacon" bears due West. Course can then be altered to pass South of No. 18 Buoy (Lat. 26° 10.3′ N. Long. 50° 43.9′ E.), and thence to Sitra Anchorage, thus keeping clear of the deep water channel.

(iv) "Sitra Beacon" located at South end of North Shoals (see "Pilotage" and "Anchorage").

If no immediate berthing instructions are received, vessels must anchor in an area South of No. 27 Buoy, until further instructions are received. Sitra Anchorage, being an area North of an imaginary line between "Sitra Middle Ground Buoy" and "Sitra Beacon" can only be used after permission to do so has been granted by Port Control.

(v) The Northern extremity of the South Shoals is marked by "South Shoals Beacon" which should be passed on the vessel's port side. This beacon lies approximately 1.4 miles S.W. from Sitra Beacon.

(vi) The colours of Beacon structures and buoys are often obliterated by guano.

(b) *Deep Water Departure Channel*

(i) Following "Alteration of Course" Positions, based upon radius of turn of 5 cables. This may necessitate an increase in engine revolutions, together with full helm, in some vessels.

(ii) The Company Mooring Master unberthing the vessel will normally leave vessel after having crossed Sitra Middle Ground Bar; and with the vessel proceeding to pass 2 cables South of "Sitra Beacon" (Fl. 3.3 sec.) and close North of No. 18 Buoy (Qk. Fl. R.).

(iii) When No. 18 Buoy comes abeam, course should be altered to 090° (T) which will bring Sitra Beacon dead astern, bearing 270° (T).

(iv) As No. 27 Buoy (Qk. Fl. W.) comes abeam to port, course should be altered to 022° (T), until Buoys 21, 23 and 25 are sighted in line, bearing 344° (T), whence course should be altered to 344° (T).

(v) On course 344° (T) Buoy No. 25 (Fl. 5 sec.) and Buoy No. 23 (Int. Qk. Fl.) will be passed close on the port side and Buoy No. 16 (Fl. R. 6 sec.) a "Middle Ground Mark" on the starboard side.

(vi) As No. 21 Buoy (Gp. Fl. (3) 5 sec.) comes abeam to port, course should be altered to 015° (T), which should bring Buoy No. 12 dead ahead and Buoy No. 21 dead astern. The bearings of these buoys should be watched closely to gauge and correct for cross set which is sometimes quite strong on this course and the next. On this course No. 14 Buoy (Fl. R. 10 sec.) will be left to starboard.

(vii) On No. 19 Buoy (Fl. 3 sec.) coming abeam, course should be altered to 002° (T) bringing Buoy No. 15 (Occ. 5 sec.) dead ahead. Buoy No. 12 (Fl. R. 2 sec.) will then be left close to starboard and No. 17 Buoy (Qk. Fl. W.) will be left to port.

(viii) In order to pass over a cable eastwards of Buoy No. 15, course should be altered to 016° (T) as Buoy No. 10 (Gp. Fl. (3) R. 10 sec.) comes abeam to starboard and then altered to 356° (T) as Buoy No. 15 comes abeam to port. This course would pass 3.5 cables West of Bahrain Approach Beacon Buoy (Gp. Fl. (2) R. 10 sec.). It may be advisable to reduce engine revolutions shortly after steadying on course 356° (T), in order to be able to increase if required to provide better steerage on rounding the buoy.

(ix) When the Bahrain Approach Beacon Buoy bears 051° (T) course should then be altered to 051° (T). As this heading is approached, it should be found that Buoys No. 8 (Fl. R. 2 sec.) and No. 6 (Gp. Fl. (3) R. 6 sec.) are in line to starboard, as Bahrain Approach Beacon Buoy comes abeam at 2.5 cables, and then should commence to open. Buoys No. 13 (Int. Qk. Fl.) and No. 11 (Qk. Fl.) are parallel to the course on the port side of the vessel, give clearance on the 43 ft. patches and give the extent of the bar which should be traversed at Slow Speed.

(x) On No. 11 Buoy coming abeam to port, course should be altered to 054° (T) passing between No. 9 Buoy (Fl. 10 sec.) and Buoy No. 4 (Qk. Fl. R.), followed by Buoy No. 7 (Fl. 5 sec.) to port.

(xi) When Buoy No. 2 (Gp. Fl. (2) R. 10 sec.) bears East, course should be altered to 071° (T) to pass close South of Buoy No. 5 (Fl. 3 secs.).

(xii) Buoy No. 5 should be close abeam to port, when the course is altered to 057° (T) and speed reduced to cross the spit which extends in a southerly direction from No. 3 Beacon (Fl. 6 sec.) in a minimum depth of 44 ft. at Chart Datum.

(xiii) When Buoy No. 1 (Fl. 1 sec.) bears 040° (T), course should be altered to 040° (T) bringing the Bahrain Light Vessel (Gp. Fl. (3) 20 sec.) on the starboard bow. One and a half miles after Buoy No. 1 has been left to port, the minimum depth of water is greater than 50 ft., and it is safe to go full ahead.

(xiv) Masters can expect to have to make adjustments from time to time, to the recommended courses, due to set. Effects of tide and current should be watched for at all times.

ANCHORAGE: Vessels must anchor 1 mile South of No. 27 Buoy unless specific permission to anchor to the West of Sitra Beacon has been received. Due presence of pipes and power lines, anchoring or use of anchors prohibited in vicinity of or between No. 1 (Island) Wharf and No. 2 Wharf except upon advice of Company Mooring Master.

RESTRICTIONS: Berthing carried out night and day. Merchant vessels carrying explosives not permitted entry Sitra Anchorage unless permission has been granted and anchorage allocated. Such vessels advised anchor in position 2 miles S.E. of South Shoals Beacon.

The Deep Water Channel between Sitra Anchorage and Bahrain Light Vessel has minimum depth of 44 ft. below Chart Datum. This permits unrestricted use of channel for vessels drawing up to 40 ft. Drafts up to 44 ft. permitted by utilisation of tidal range over shoaler areas. Additional channel for drafts up to 30 ft. provided to S.E. of main Deep Water Channel. The purpose of this channel is to keep main deep-water channels free for deep-drafted vessels.

Masters who intend to utilise Deep Water Departure Channel with drafts in excess of 40 ft. are requested to advise port Captain, Sitra, not later than 48 hours in advance.

Masters of departing vessels requiring utilise rise of tide, to cross bar N.E. of Bahrain Approach Beacon, and that South of No. 3 Beacon, should be under way, passing Sitra Beacon not later than 3.5 hours before next predicted *High Water Mina Sulman*, or at a time not later than that which would allow vessels to make the passage between Bahrain Approach Beacon and No. 3 Beacon at reduced speed of 8 knots, having full benefit of tide, and passing first Bahrain Approach Beacon Buoy. 1.5 hours before predicted *High Water Mina Sulman*.

MAX. SIZE: *Bapco Terminal:* Vessels up to 40 ft. draft, under normal circumstances, or up to a maximum of 44 ft. draft, making use of the tide.

Vessels from 80,000 to 110,000 d.w.t. will only be moored on berths 5 & 6 providing the following conditions are met:

1) Maximum berthing displacement 71,500 tons.
2) Maximum overall length 900 ft.
3) Maximum distance from Manifold to Bow or Stern 475 ft.
4) To have segregated permanent ballast system of at least 15% of d.w.t. This ballast to be retained until loading commences, then discharged balancing loading rate.
5) To have the propellor covered and a trim of 12 to 15 ft.
6) Mooring to consist of 7 lines at each end, 3 Bow/Stern lines to Outer Mooring Dolphins, 2 Quarter lines to Inner Mooring Dolphins, 2 Backsprings to Breasting Dolphins.

Alba Marine Facilities: Up to 35,000 tons d.w.t., up to 35 ft. draft.

HEALTH: Bahrain Port Health Regulations based on International Sanitary Regulations adopted by World Health Organisation, May 1951. Quarantine signals must be prominently displayed approaching Sitra. Pratique normally granted by Bahrain Government Port Health Officer, Agent's representatives or Company Mooring Master to healthy vessels scheduled for immediate berthing.

No person, excepting Agent's representative or, in the case of healthy tankers, Mooring Masters, is permitted to leave or board a vessel until pratique has been granted.

Rat guards should be properly placed on all mooring ropes as soon after berthing as practicable.

The gangway or other access should be lighted at night.

The port of Sitra is not classed as a "Plague Port" but all Crew members must have in their possession valid certificates of vaccinations and inoculations in accordance with current Health Regulations.

The Bahrain Government Port Health Officer has an office on Sitra Causeway Pierhead and is available from 1030 hrs. to 1230 hrs. daily except Fridays. By arrangement through vessel's Agent the Port Health Officer, in addition to official duties, will provide consultation and treatment for other than quarantine purposes.

Deratisation and Deratisation Exemption Certificates are obtainable in Bahrain. Requests should be made through the vessel's Agent.

RADIO: All incoming vessels scheduled to load or discharge at either BAPCO or ALBA facilities should establish radio contact with BAPCO via "Cable & Wireless" at Manama, Bahrain, at least 48 hours prior to arrival giving a firm ETA, arrival draft and the requirements if any for bunker fuels.

The Company does not operate a coast radio station, long-distant radio communication being routed through Cable and Wireless Coast Station "Bahrain Radio" "A9M" of Manama, Bahrain, upon which a regular watch should be maintained. The cable address is "Bapcoship Bahrain". When within 50 miles of Bahrain, communication should be established with "Sitra Port Control", by VHF.

All communications to the Company should be quoted in GMT, and the appropriate letters, GMT, inserted after the time.

W/T Medium Frequency

Continuous watch 24 hours a day for calling and safety 500 kHz.
for working 487, 442, 516 kHz.

W/T High Frequency

Time	*Transmitting Frequency*	*Searching*
0000–2400 GMT	4,302 kc/s.	4,181.2–4,182.4 kc/s.
0000–2400 GMT 0300–1700 GMT	8,448 kc/s.	8,362.4–8,364.8 kc/s.
0500–0800 GMT 1100–1500 GMT	12,709 kc/s.	12,543.6–12,547.2 kc/s.
0800–1100 GMT	17,175.2 kc/s.	16,724.8–16,729.6 kc/s.

Traffic lists are broadcast at the beginning of each of the HF schedules.

R/T High Frequency
Continuous watch 24 hours for Calling and Safety:

2182 kHz	A3H USB
4136.3 kHz	A3A A3J USB
6204 kHz	A3A A3J USB

HF Working

Transmit	Receiving
2607	As Requested
2656	
3745	
4394.6	4100.2
8198.1	8210.5
12396.5	12354.8
16477.5	16512.7

Radio telephone calls on high frequency may be made at any time, if arrangements are made by W/T, during W/T schedules.

R/T Very High Frequency

Continuous watch 24 hours a day for calling and safety	Channel 16
for traffic	Channel 26/27/82/83

"Sitra Port Control"

Continuous watch 24 hours a day for calling and safety	Channel 16
for normal working	Channel 9
for alternative working	Channel 6, 8, 12 & 14

All vessels are requested to keep "Bapcoship Bahrain" fully advised regarding estimated times of arrival. It is requested that vessels provide "Bapcoship Bahrain" with an ETA and arrival drafts, not later than 48 hours steaming time from the port of Sitra.

A separate radio message should be sent to the Government Port Health Officer, Bahrain, advising last bill of health and present health conditions on board.

The Wireless equipment of any vessel must *not* be operated whilst alongside Company wharves.

OIL WHARVES: *No. 1 (Island) Wharf:* No. 1 (Island) Wharf consists of one main central platform supported on steel piles with four inter-connected mooring dolphins, two positioned to the North-west, and two to the South-east; giving the wharf an overall length of 923 ft. This wharf, which is supplied by submarine pipe-lines, provides two berths protected by four breasting mono piles.

Depths at this wharf are as follows:

Berth No. 5	46 ft. at Chart Datum	(14.00 m.)
Berth No. 6	43.5 ft. at Chart Datum	(13.25 m.)
	Max. draft at these berths 44 ft.	

No. 2 Wharf: No. 2 Wharf is a pile driven "T" head structure with 3 inter-connected dolphins, 2 mooring dolphins, positioned to the N.W., and a warping dolphin positioned to the S.E., giving the wharf an overall length of 1,665.5 ft. and provides 4 berths, 2 on the outside and 2 on the inside. Both outside berths No. 1 and 2, and the N.W. inner berth No. 3, are protected by berthing beams. This wharf is connected to the mainland by a causeway, 3 miles in length.

Depths at this Wharf are as follows:

Berth No. 1	42 ft. at Chart Datum	(12.80 m.)
	Max. draft 40 ft.	
Berth No. 2	42.5 ft. at Chart Datum	(12.95 m.)
	Max. draft 40.5 ft.	
Berth No. 3	38 ft. at Chart Datum	(11.60 m.)
	Normal max. draft 34 ft.	
Berth No. 4	38 ft. at Chart Datum	(12.20 m.)
	Normal max. draft. 34 ft.	

There are length limitations as follows:

Berths 1 and 2 normally 820 ft., but may be exceeded depending upon the configuration of the vessel, and the vessel utilising the other berth.
Berth No. 3; 560 ft. (170 m.)
Berth No. 4; 550 ft. (167 m.)
Berths No. 5 and 6; 900 ft. (274.31 m.)

Coastal Tanker Wharf: This wharf which lies 023° to 203° is limited to vessels of under 240 ft. in length and less than 16 ft. (4.90m.) draft. The wharf is a pile driven structure connected by a catwalk to the causeway.

BALLAST: The discharge of dirty ballast within the territorial waters to Bahrain is strictly prohibited. As a further measure to avoid pollution by oil of the Marine environment, Masters of tankers are requested not to pump any oil overboard within the Gulf area.

There are limited facilities for the receipt of oily residues at Sitra Wharves. Vessels, which require to discharge ballast at Sitra Wharves after berthing, must, therefore, ensure that the ballast is clean prior to arrival in the Gulf Area.

In the event of a vessel spilling oil in Sitra harbour the Company will, at its discretion, clean up the oil and recover costs by charging the vessel.

BERTHING: Vessels required be sufficiently ballasted with clean ballast water before coming alongside. Minimum tanker drafts normally acceptable are:

Deadweight-tonnage	*Feet*		*Metres*	
	F.	*A.*	*F.*	*A.*
16,000 to 20,000	12 ft.	20 ft.	3.60	6.00
20,000 to 30,000	13 ft.	21 ft.	4.00	6.40
30,000 to 40,000	14 ft.	22 ft.	4.20	6.70
40,000 to 50,000	15 ft.	24 ft.	4.60	7.30
50,000 to 60,000	16 ft.	25 ft.	4.80	7.60
60,000 to 70,000	16 ft.	26 ft.	4.80	7.90
70,000 to 90,000	17 ft.	26 ft.	5.20	7.90
Over 90,000	17 ft.	27 ft.	5.20	8.20

Mooring Masters may decline berth vessels if not sufficiently ballasted. Berthing operations conducted on 24-hour basis at discretion of Mooring Master; wind, weather, tide and other circumstances permitting. Mooring Masters will decline berth vessels if not properly equipped with satisfactory mooring lines, or if deck appliances inoperable, or if steering gear, telegraphs and whistles not in an efficient condition. Anchors and cables should be cleared ready for letting go. Master should notify Mooring Master of any defects or peculiarities pertaining to vessel. Masters requested maintain continuous watch on VHF for berthing instructions. Vessels must be equipped with *at least* five lines forward and four lines aft. These lines must be sufficient length enable moorings to be "doubled up" in bad weather. Method of mooring at discretion of Mooring Master. The "offshore" anchor should be cleared and lowered to the waterline, ready for letting go, before approaching the berths.

Anchor buoys are *not* to be used whilst moored alongside.

ALBA MARINE FACILITIES: The Alba marine facilities consist of an artificial island built in shallow water, approx. 2.75 miles off the coast of Sitra Island, and a jetty in deep water, which is connected to the island by a roadway 560 ft. long, above which runs a conveyor which carries raw materials from the jetty to the coke and alumina store situated on the island. The jetty is 562 ft. long and 47 ft. wide. The seaward berth, depth 35 ft., provided with berthing heads, to accept vessels up to 35,000 d.w.t. The landward berth is provided with fendering to accept vessels up to 12,000 d.w.t. Mooring dolphins at each end of the jetty.

Loading and Unloading Facilities: Bulk carriers unloaded at seaward berth by two 10-ton capacity grab cranes. Metal exports loaded at landward berth, using ship's gear, or possibly at seaward berth when the jetty cranes may be used.

Services: Vessels using Alba Marine facilities are assisted by Bahrain Petroleum Company Limited Mooring Masters and tugs. Transportation between the Alba jetty and mainland must be provided by Agents. No fresh water available at Alba jetty.

Operators: Company cable address is "Metalba Bahrain".

TUGS: Tugs normally join in Sitra Anchorage after Pilot has boarded. Tugs lines used during berthing operations. During unberthing ship's lines used for forward tug, and tug's line for after tug. Mooring Master will decide number of tugs.

Normally two diesel-electric tugs on station. Each tug is fitted with fire-pumps and monitors to assist fighting fires.

MEDICAL: Advance notice to Agents preferable. Good hospital and medical facilities.

Emergency hospital cases will be treated as such, and will be handled by the vessel's Agent or by Company facilities, whichever is first available. Under normal conditions, the vessel's Agent should handle all personnel from vessels other than "Company" vessels.

Heat exhaustion. Experience over many years has shown incidence of heat stroke and heat exhaustion cases among the crews of vessels visiting Bahrain during the hot season, with some fatalities. The Company medical authorities have prepared notes on this subject which may be of assistance to Masters, but skilled medical assistance should be called for immediately a case of heat exhaustion or heat stroke is observed.

To enable heat exhaustion cases to be treated expeditiously a Heat Exhaustion Unit is located in the Port of Sitra shipping offices at the Wharf gate.

RESIDUES: Limited slop tank facilities for oily residues at all berths.

LOADING/DISCHARGING: *Readiness:* The following will apply in regard to Notice of Readiness.

Notice of readiness to load is a warranty on the part of the Master that the vessel is in all respects ready to load and that the tanks, pipes, pumps and accessories of the vessel are fit to receive the cargo to be loaded.

The Master or his representative is required to hand to the Company, within normal business hours, a written Notice of Readiness to load. Receipt of such Notice of Readiness by the Company does not necessarily imply acceptance.

The Company will make every effort to accept Notice of Readiness when tendered on arrival, provided vessel is in all respects ready to load. The Company will endeavour to load vessels upon arrival and/or as promptly as a berth is available.

Arrival, where used above, means when the vessel passes "Sitra Beacon" when proceeding either straight to the berth or to anchor in Sitra Anchorage. In the case of vessels coming from Mina Sulman it is the time when passing North range beacon. In cases where vessels are required to anchor in the area South of No. 27 Buoy, then the time of anchoring will be used providing that the presence of the vessel is made known to Sitra Port Control by VHF or BAPCOSHIP via Bahrain Radio on radio telephone, Awali 2662 at the time of anchoring.

Responsibility: Loading will not start until the vessel's loading officer reports the vessel is ready to receive cargo and the Company's Loading Master is satisfied with the preparations for loading. Any inspection made by the Company's Loading Master in this regard is performed without the Company assuming any liability.

All operations on board the vessel in connection with loading and discharging are the responsibility of the vessel.

A Company Loading Master will be available throughout the loading to offer advice to the Master on loading procedures and loading hazards.

Warning is given of the danger of closing a valve against an incoming oil stream. This procedure will create excessive pressures which may result in damage to the loading hoses, vessel's pipelines or Terminal facilities. Vessels will be held liable for damages resulting from failure to observe this precaution.

Hose handling: Without assuming any liability on behalf of the Company, Company employees will assist in connecting and disconnecting hoses to vessels. A ship's officer must be present, and the ship's deck officer on duty must approve the hose connection on board.

The Company has modern air-operated hose-handling equipment on all berths at the No. 1 (Island) Wharf and the No. 2 Wharf, except No. 4 Berth. However, the vessel's hose rigging derricks should always be in a constant state of readiness to give additional assistance as necessary. Company employees will not operate ship's derricks or winches.

Cargo inspection service: The service of the Bahrain Government Petroleum Inspectors are available for the inspection and certification of the condition of a vessel's tanks, pipes, pumps and appurtenances. the Agent will, upon request, arrange for the services of this Inspector.

The Company will not issue any certificate purporting to state that vessel's tanks, pipes, pumps and appurtenances are clean or acceptable for receiving cargo. In the event a Company representative either alone or accompanied by the Bahrain Government Petroleum Inspector, inspects the vessel, the Company will make no representation nor assume any responsibility in connection with the condition of vessel's tanks, pipes, pumps and appurtenances, nor will the Company assume any liability for contamination of cargo aboard ship caused by the condition of the ship's tanks, pipes, pumps or appurtenances.

Loading rates: This table prescribes the approximate average loading rates of products available at the Wharves:

Product		*Barrels per hour*	
Motor gasoline	up to	7,000	on 2 S/Ls
Jet fuel	,,	10,000	on 3 S/Ls
Naphtha (JP4)			
Kerosene	,,	5,000	on 2 S/Ls
White diesel	,,	12,000	on 2 S/Ls
Black diesel	,,	2,500	on 2 S/Ls
Fuel	,,	25,000	on 3 S/Ls

Loading rates of kerosenes and jet fuels are restricted due to static electricity hazards. These rates will be made available by the Company Loading Master.

A maximum pressure of 150 lb. is allowed on the loading hoses.

Discharging Rates: The discharge rates will be governed by the vessel's pumps, which must be limited to 150 lb. pressure.

DENSITY: Average 1030.

FRESH WATER: Limited quantities of well-water available at Sitra Wharves is saline and mainly used for washing purposes, although can be used for drinking. Delivery rate about 15 tons per hour. Nominal delivery charge. Vessels berthed for water only in emergency and additional fuels charge. Drinking water available at Sitra Anchorage from barge, capacity 300 metric tons.

FUEL: Bunkers available all berths and by Lighter. Fuel Oil maximum 1,500 secs. Redwood. Marine Diesel. Diesel Gasoil. Vessels should give at least 24 hours notice.

Facilities: Bunkers can be supplied at all oil berths and can be loaded simultaneously with bulk cargo.

Bunker quantities are measured by "Brodie" positive displacement meters.

Chief Engineers, on request to the Company's Loading Master, can avail themselves of the opportunity of checking the opening and closing counter readings on the meters supplying bunkers to the vessel.

Product	*Bunkering Rates are approximately* *Bbls/hr*	*Tons/hr*
Fuel oil	up to 2,500	up to 360
Marine diesel	up to 1,500	up to 200

Bunker Barge Service: The Company operates a bunker barge service principally to supply bunker fuels to vessels at Mina Sulman. This service is also available to vessels in the Sitra Anchorage and Alba wharves, but may be temporarily suspended due to adverse weather conditions.

The service is maintained by the barges "Bapco 1", "Safala" and "Askara". *"Bapco 1".* The barge with a loaded deadweight of 1,200 L.T. has a cargo capacity of approximately 8,900 barrels. Its approximate maximum capacities are as follows:

Marine diesel	1,800 bbls (240 tons)	or	5,200 bbls (720 tons)
	+		+
Fuel oil	6,350 bbls (950 tons)		2,800 bbls (425 tons)

The discharge rates for the "Bapco 1" are:

Marine diesel	50– 750 bbls/hr.	(10–100 t.p.h)
Fuel oil	100–1,500 bbls/hr.	(30–200 t.p.h.)

"Askara"/"Safala". These barges have a capacity for 1,300 bbls (170 tons) of diesel gas oil which it can discharge at rates between 50–760 bbls/hr. (5–100 t.p.h.).

Application for the use of the bunker barge service should be made to the Company via the vessel's local Agent and it is desirable for the vessel to give as much advance notice as possible.

Lubricating oils and greases: A full line of Caltex Marine lubricants and greases is available at Bahrain.

In order that lubricating oils may be promptly delivered, Masters of vessels are requested to radio "Bapco Bahrain" their requirements at least 48 hours prior to their arrival at the port of Sitra.

Empty lubricant containers are not accepted at Bahrain.

Drummed products: Limited quantities of gasoline, kerosene and diesel gas oil in drums are available at short notice.

To facilitate prompt delivery Masters are requested to radio "Bapco Bahrain" at least 48 hours prior to their arrival for orders exceeding ten drums.

All supplies are in non-returnable steel drums.

FIRE PRECAUTIONS: Vessel receives full details/regulations on berthing. Vessels must have firewires, and engines must not be immobilised whilst alongside.

GANGWAY/DECK WATCHMEN: An officer must be on deck during all loading or discharging operations. A deck watch must be maintained for moorings and hose connections.

TOBACCO ALLOWANCE: No restriction.

WINE AND/OR SPIRIT ALLOWANCE: Ship's requirements. Bond sealed but can be re-opened upon application. Liquor trafficking between vessels alongside Wharves or between vessels and shore strictly prohibited.

IDENTIFICATION CARDS: Discharge Book or Passport to be deposited with Immigration when going ashore.

CONSULS: Numerous Embassies and Consuls are now located in Bahrain.

REPAIRS: Local marine repair companies can undertake limited repairs of general nature.

REPATRIATION: Facilities for crew change and repatriation by sea or air.

AIRPORT: Served by regular Airlines located about 15 miles from Sitra.

TIME: GMT plus 3 hours. No changes during year.

HOLIDAYS: Numerous holidays do not affect operation of Port, which operates 24 hours a day, 7 days a week. Local Sabbath is Friday.

TELEPHONES: No facilities for placing telephones on Ships.

NAVIGATION: Port Captain will be available for advice concerning navigation of channel.

Navigation warnings: Attention is drawn to the service provided by the Middle East Navigational Aids Service (MENAS) in promulgating navigation warnings covering the whole of the Gulf area.

Mariners are requested to report any hazard/obstructions encountered, observed failure of or alterations to navigational aids, etc., to:

Middle East Navigational Aids Service,
Post Box 66, Bahrain,

or if the information is urgent, radio/cable to

Megulite, Bahrain.

Printed navigation notices:

(a) The notices, promulgate all navigational information of a permanent or semi-permanent nature.

(b) Each notice, which is serially numbered, in sequence each year, remains in force until specifically cancelled by a later notice, when the information in the notice is:
  (i) Known to have been promulgated in British Admiralty Notice to Mariners.
  (ii) No longer valid.
  (iii) Considered sufficiently promulgated.

(c) These printed notices are distributed to various Agents, Port and Harbour Authorities, where they can be viewed.

Radio navigation warnings:

(a) The warnings relate to navigational information which may immediately effect the safe navigation of ships at sea.

(b) These warnings are serially numbered, with the prefix "NAV" and authenticated by the signature "Megulite".

(c) The warnings are broadcast by Bahrain Radio (A9M) on 487 kc/s. at 0518, 0918, 1318 and 1718 GMT. For further details consult the latest edition of "Admiralty List of Radio Signals" Volume V.

(d) Each radio warning is rebroadcast for a period of from 24 hours to one month, depending upon the nature of the information it contains. At the end of which period it is either self-cancelling or superseded by a new warning.

SHORE LEAVE: *Permitted under following conditions:*

When persons going ashore are in possession of valid Vaccination Certificates, and inoculation against cholera certificates, if these required by Port Health Authority.

Persons going ashore must be in possession of valid passport, or Seamen's Discharge Book, which must be handed to the Immigration Officer, and recovered before returning on board.

No smoking is allowed on the wharf, or on board any launch between the wharves, or by any person within 900 ft. of the wharves.

Crew members are warned that it is an offence to bring ashore fire-arms or drugs, and any traffic in intoxicating liquor is strictly prohibited.

GENERAL:

Anchors: The offshore anchor should be cleared and lowered to the waterline, ready for letting go, before approaching the berths. Anchor buoys are not to be used.

Rat guards: Must be fitted. They are available for hire at a nominal rate.

Gangway: Every vessel shall provide a gangway, which shall be adequately lighted during the hours of darkness.

Swimming: Not permitted in the vicinity of the wharves.

Provisions: Available.

Laundry: Available.

PORT REGULATIONS: Port Captain should be contacted for any queries not covered by lists of regulations provided on arrival.

AUTHORITY: Port Captain. The Bahrain Petroleum Company Limited.

AGENT: See "Mina Sulman".

Banaba (Ocean Island)

BANABA (Ocean Island): 00.52 S. 169.35 E.

DOCUMENTS:
- Clearance from last overseas port.
- 2 Crew Lists.
- 4 Passenger Lists.
  - Bonded Stores List including Narcotics List (in duplicate).
  - Crew Store List (sometimes called search list or curio list).
- 4 Manifests.
- 1 International Health Declaration.

Documents to be completed when ship arrives at Banaba (Ocean Island):

List of unmanifested cargo; Passengers' Baggage Declaration if any, 1 copy per passenger.

PILOTAGE: Pilotage available on request without charge and Masters advised avail themselves of this service. Necessary that Masters, through Banaba (Ocean Island) Radio, inform telegraphic address "Phoscom Ocean" of ETA 48 hours before arrival, confirming or altering this 12 hours before arrival. Phoscom reply through Banaba (Ocean Island) Radio on receipt of second message giving time for vessel to close in to 0.5 miles West of loading plants, where Pilot will board. In case of adverse weather or congestion, Masters notified by radio or by VHF Channel 16, 156.8 Mc/s., with range of about 40 miles. Vessels handled inwards in daylight only, and should fly "G" flag when approaching island. A safe and clean Pilot ladder should be provided, and a good lee made for Pilot to embark.

ANCHORAGES: No anchorages available owing to extreme depths of water. Vessels waiting normally drift off and return at daybreak or when instructed to do so.

RESTRICTIONS: Tide and draft have no bearing on entry but not normal to handle vessels into berth in darkness. However, vessels are unmoored at all hours.

MAX. SIZE: Vessels have been handled up to overall length of 575 ft. Beam should not exceed 75 ft., draft limitations 34 ft. 6 in.

HEALTH: Masters of vessels approaching the Island required to send telegram addressed "Quarantine Officer, Banaba (Ocean Island)" within 24 hours of arrival. Telegrams should state name of last port, date, presence of any infectious disease. On receipt quarantine officer will send reply indicating whether or not pratique granted. It is still necessary to fill out International Declaration of Health and hand to Boarding Officer after berthing.

RADIO: Banaba (Ocean Island) Radio station call sign VQK. Daylight range not great but traffic may be passed through C2N Nauru. No radar on the Island. VHF Channel 16, 156.8 Mc/s.

TUGS: No tugs required for berthing.

BERTHING: Such special requirements which relate to berthing are contained in a Letter of Advice to Ship Masters issued by the BPC.

STEVEDORES: As stevedoring is carried out by Phoscom, no separate advice required. Loading rate of bulk phosphate is as high as 1,300 t.p.h.

MEDICAL: Medical treatment can be given at short notice. Limited hospital facilities available, and emergency surgery can be carried out. Smallpox vaccination required, and cholera if vessel from infected area.

TANKERS: Maximum length 600 ft., no draft restrictions. 8 in. discharge line to shore storage tanks.

DENSITY: Normal salt water all states of tides.

FRESH WATER: Island water imported, and water will be supplied only in emergency.

FUEL: Island stocks are imported for use in phosphate industry, and only limited quantities of heavy fuel or diesel oil available in extreme urgency.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Carried out by crew.

CERTIFICATES: Deratisation certificate only.

CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes or half lb. tobacco or 50 cigars for use on board; 25 cigarettes or 1 oz. of tobacco may be taken ashore for own personal consumption. Wine/Spirit, 1 bottle only for use on board; no bottles may be taken ashore.

CARGO GEAR: Cargo gear should be up to standard demanded in Australian ports.

IDENTIFICATION CARDS: Some form of identification, passport, discharge book, or identity card should be carried by crew members.

CONSULS: None.

REPAIRS: Small repairs such as welding, brazing, lathe work, etc., can be carried out, only when essential to allow vessel to proceed on voyage. Main engines cannot be immobilised whilst the vessel moored to any section of buoy system.

DRY DOCKS: None.

REPATRIATION: Repatriation can be arranged. No facilities for crew changes.

AIRPORT: No airport on the Island.

TIME: GMT plus 11.5 hours.

HOLIDAYS: Christmas Day, New Year's Day, and Good Friday normally closed holidays. Other National holidays occur during year but normally work carries on, on these days.

POLICE/AMBULANCE/FIRE: All emergencies handled by Harbour Masters, one of whom remains aboard vessel throughout time vessel attached to mooring system.

TELEPHONES: Telephones are put aboard for use of island staff working vessel.

GENERAL: Shore labour normally boards vessel with Pilot to assist in mooring to buoy system.

SERVICES: No special services available.

SHORE LEAVE: This may be granted at discretion of Master, but should in all cases terminate at 1700 hrs.

REGULATIONS: No vessel may immobilise main engines whilst moored to buoy system. Main engines should be on instant readiness, deck power should be available at all times, and vessel must proceed to sea when instructed to do so by Harbour Master.

DELAYS: Normally no delays expected. Vessels could wait a day, or possibly 2 due to port congestion, but this seldom happens, delays can occur due to adverse weather, duration of which unpredictable.

AUTHORITY: The Harbour Master, appointed by The British Phosphate Commissioners, Banaba (Ocean Island).

NOTES

Please also advise Shipping Guides Ltd.

Bangladesh, People's Republic of

CHALNA (Khulna): 22.35 N. 89.32 E.

PORT LIMITS: *To the North:* A line drawn due East-West from a point in position Lat. 22° 38′ 00″ N., Long. 89° 20′ 00″ E. to a point in position Lat. 22° 38′ 00″ N. Long. 89° 40′ 00″ E. *To the South:* A line drawn due East-West from a point in position Lat. 21° 27′ 00″ N., Long. 89° 20′ 00″ E. to a point in position Lat. 21° 27′ 00″ E. to a point in position Lat. 21° 27′ 00″ N., Long. 89° 40′ 00″ E. *To the East:* A line joining the point in position Lat. 22° 38′ 00″ N., Long. 89° 40′ 00″ E. to a point in position Lat. 21° 27′ 00″ N., Long. 89° 40′ 00″ E. *To the West:* A line joining the point in position Lat. 22° 38′ 00″ N., Long. 89° 20′ 00″ E. with the point in position Lat. 21° 27′ 00″ N., Long. 89° 20′ 00″ E.

DOCUMENTS: See "Chittagong".

ARRIVAL ADVICE: Inward ships must present themselves at Pussur fairway buoy at least 24 hours before high water to enter on a particular day.

The Master should send the following information to port via Khulna Radio call sign S3E and to duty pilot vessel call sign SZVS and pilot station call sign ASVI 24 hours prior to arrival at Khulna fairway buoy.

1. ETA Pussur fairway buoy.
2. Fresh water draft.
3. Speed available.
4. Vessels length.
5. Vessels gross tonnage.
6. Fresh water requirements.

PILOTAGE: Compulsory. Master should in addition to usual ETA to Agents keep in touch with pilot vessels stationed at Hiron Point about 45 miles from the base calling ASVI, depending on which vessel is stationed at the time. Pilot vessels are equipped with radio and maintain regular watches on 500 m. from 0600 to 0800, 1000 to 1200, 1400 to 1600 and 1800 to 2000 hrs. local time. If a message is not being picked up, by Khulna Radio call sign ASV, it should be relayed through Chittagong Radio or the pilot vessel.

Ships over 17 ft. draft are usually piloted on the flood to cross the bar and the pilot vessel, which has been in contact with the incoming ship leaves from Hiron Point, in time to coincide with the arrival of the vessels at the pilotage ground, situated about 7 miles Northwest of the Fairway "Lighted" buoy where ships can anchor in 9 fathoms of water. The channel from Fairway up to the Anchorage has been marked with lighted buoys and pilotage is done in daylight.

In rough weather and especially during the monsoon, ships are led into calm waters by the pilot vessel, which maintains close radio contact, and Pilots board inside the river.

ANCHORAGE: Chalna port consists of a sheltered deep-water anchorage at Mongla on Pussur River.

Depth of water 19 ft. to 45 ft. at LLWD. Distance from sea 65 miles.

RESTRICTIONS: Entrance to the Pussur River is about 6 miles wide at the mouth and has a bar over about 5 miles where the depth is 3 fathoms.

MAX. SIZE: Ships drawing up to 23 ft. can cross the bar in all seasons. In S.W. monsoons vessels up to 25 ft. 6 in. can be accommodated on spring tide.

HEALTH: On arrival at the mouth of the Pussur River, vessels are required to wireless "Quarantine" Khulna, giving health report, to avoid difficulties with Port Health Authorities.

RADIO: At present coast station at Khalishpur (Khulna Radio) of Telegraph and Telephone dept. maintain 24 hours W/T watch on 500 kc/s. call sign (S3E). In addition to the T & T system, the port has harbour control station (call sign AQBC) at Mongla and pilot station (call sign AXVI) at Hiron Point to maintain 24 hours W/T watch on 500 kc/s. The station at Hiron Point guides incoming and outgoing vessels from fairway to pilot grounds and vice versa and remains in touch with Khulna Radio, Mongla AQBC and ships anchored at Hiron Point for movement of Pilots, mooring of vessels etc. the *Sarothi II* is equipped with W/T and VHF system and is kept standby for emergency work.

VHF: At present there is no VHF Communication system owned by the port but ships lying in port may contact shore station through VHF owned by T & T. The port maintains two W/T stations. One at Hiron Point pilot station call sign ASVI and the other at Mongla call sign AQBC in addition to the above mentioned. W/T station coastal W/T station Khulna Radio call sign S3E owned by T & T remain in operation for maritime shipping. These three stations maintain round the clock watches.

TUGS: Two powerful tugs available to assist in emergency. Not required for berthing.

BERTHING: Fifteen swinging moorings and unlimited anchor berths.

CRANES: These facilities are not available at present. But will be available after completion of permanent port facilities.

STEVEDORES: Plenty of labourers available.

TANKERS: Oil is not handled at the port at the present time.

DENSITY: The density of water at the Outer Bar varies from 1005 to 1025 and at Mongla from 1002 to 1020.

FRESH WATER: Available by barges. Cost Tk. 40 per ton.

FUEL: Coal and fuel oil can be arranged in limited quantities if sufficient advance notice given.

FIRE PRECAUTIONS: One buoy tender fitted with powerful fire fighting appliances can be made available to meet emergency at very short notice.

CONSULS: none.

REPAIRS: Minor repairs can be arranged through Khulna shipyard. Repair facilities are being constructed along with the permanent facilities.

DRY DOCKS: A dry dock for sea-going vessels is under construction at Chittagong.

SURVEYORS: Lloyds/NKK. Surveyors are available at Khulna.

TIME: Six hours difference exists between GMT and local time.

HOLIDAYS: Eid-ul Azha, Moharram, Eid-I-Miladun Nabi, Independence Day, Jamat-ul-Bida, Eid-ul-Fitr, depending on the sighting of moons calculated in the basis of moon months.

POLICE/AMBULANCE/FIRE: Police telephone number 7 and for other purposes port telephone No. 3115 is available.

TELEPHONES: No arrangement is available at the anchorage for placing telephones on board the vessels.

SHORE LEAVE: Crew members of foreign vessels are allowed to disembark ashore as per master's request.

GANGWAY/DECK WATCHMAN: On receipt of orders from the Master the Stevedores will arrange to supply watchmen by day and night.

HATCHES: Opening and closing of hatches is normally carried out by the stevedores.

CARGO GEAR: Goods loaded and unloaded by the ships gear, no handling equipment available at the port.

REPATRIATION: Local shipping agents are responsible for arranging repatriation of the Crew.

AIRPORT: Jessore, which is 70 miles from the port.

IDENTIFICATION CARDS: Seaman's book is sufficient for identification.

REGULATIONS: Crew members are not allowed to undertake chipping/painting of vessels whilst in the port. This is to be done by licenced constructors.

DELAYS: No unusual delay in the port.

DEVELOPMENTS: Permanent port facilities with 7 jetties, transit shed and warehouses including 2 feeder container jetties are under construction on the East bank of the Pussur River adjacent to the present anchorage. These will be ready by the end of 1978. A scheme is under preparation to deepen the channel to allow vessels with deeper drafts to enter the port.

AUTHORITY: Chairman, Port of Chalna Authority.

CHITTAGONG: 22.19 N. 91.48 E.

DOCUMENTS: *Before vessel's arrival:*

2 copies Freight Manifest.
2 sets Bill of Lading.
3 copies Stowage Plan.
15 copies Passenger List.
4 copies Cargo Manifest.
3 copies Hatch Lists.
1 copy Exception Lists.
2 copies Passenger Money Manifest.
2 Copies Special Cargo List.
2 Copies Hazardous Cargo List.
2 Copies Heavy Lift Cargo List.

With vessel:

1 set Arrival Papers as per booklet available with Agent.
2 Copies Cargo Manifest.
Last Port Clearance.
Passenger Lists, disembarking and transit — 6 copies each.
Crew List 8 copies plus 2 for immigration police.
List of Favour Parcels 2 copies.
Currency declaration of ship's money, officers and crew, together with the personal property list.
Ships Stores Lists on local Customs forms - 3 copies.
Cargo Clearance Certificates.
Deratisation Exemption Certificate.
International Load Line Certificate.
Radio Safety Equipment Certificate.
Safety Equipment Certificate.
Record of Safety Equipment Certificate.
Load Line Certificate.
Ship's Article.
Ship's Register.
Light Dues Receipt.
Radio Telegraphy Certificate.
Safety Construction Certificate.
Deratting Certificate.
Voyage Licence.
Exemption Certificate of Crew Members.
I.P.B. Permission of Foreign Nationals.
Gear Register Book with Annealing Certificate
Authority Letter of Supernumery.
Store List.

PILOTAGE: Pilotage is compulsory. Pilots board and leave vessels at the outer anchorage.

Inward ships must present themselves at Fairway Buoy at least three hours before high water to enter on a particular day.

APPROACHES: Since South Patches lightvessel is missing, it is advisable to make for Elephant Point/Cox's Bazaar, and then shape course to pass West of South Patches. Due allowances must be made for the state and rate of tide. In this area, the tide runs in a North–South direction.

Once it is ascertained that the vessel is West of South Patches, course can be shaped to pass 8–9 miles off Kutubdia Lighthouse. The buoys indicating the channel to Chittagong outer anchorage are mostly out of place or missing and cannot be relied upon. The buoys are unlit and without radar reflectors and navigating in their vicinity during hours of darkness can be hazardous.

Vessels must reach pilot grounds at mouth of River Karnaphuli 3 hours before high water during daylight hours. No berthing after sunset.

ANCHORAGE: The Anchorage is considered safe and the holding ground is good. The bed of the river is soft mud and is harmless in case of grounding.

Holding ground off Kutubdia fairly good but strong tides render it necessary to pay-out extra length of cable.

Spring tides at outer anchorage are very strong (6 to 8 knots) and at times of freshets the rate may be more. It is advisable to keep engines ready at all times during Spring tides, and maintain continuous and efficient anchor watches.

Ship Masters approaching Chittagong Roads are advised not to attempt to cross bow of vessels at anchor/underway to avoid drifting on them resulting in probable collision in view of the prevailing strong current at Outer Anchorage. However, if it is inevitable to cross, Ship Masters may do so with caution by giving a wide berth to the vessel at anchor/underway considering the minimum velocity of the current being 6 knots and other marine factors.

RESTRICTIONS: Night entry not permitted. Outward pilotage allowed during night for vessels up to 510 ft. LOA. Though a river port, Chittagong is tidal harbour, and presently ships enter only on the day tides, therefore ships should endeavour to arrive at least 3 hours before high water of the day's tide. Ships of length up to 575 ft. enter the main berth, day's draft permitting. Ships of 605 ft. (LOA) brought inside the harbour on experimental basis. During Spring tides vessels under 7 knots will not be handled.

MAX. SIZE: Anticipated safe drafts are predicted three months in advance. The depth of water over the Outer, Inner and Gupta Bars is maintained at 14.5 ft. at low water throughout the year. The bars are situated at distances of half, one and 4.75 miles from the entrance. In order to calculate the draft for entering and leaving port, the depth of 14.5 ft. over the bars is added to the height of water in the tide tables for day tides. Also see "Tankers".

HEALTH: All vessels must send the standard quarantine messages by radio. Vessels which have touched ports between Port Sudan and Durban, on the East Coast of Africa including these two ports, or any other yellow fever port or other port on the continent of Africa, or ports which are declared from time to time as quarantine areas, are suspected vessels on account of yellow fever or jigger, or other infectious disease as the case may be and may not have communication with the shore till declared by the Port Health Officer, who attends only between sunrise and sunset, except in special circumstances. The incubation period for yellow fever is 9 days, but vessels arriving later than 9 days are still not free from quarantine because there is no incubation period for jigger.

VHF: "Port Radio Control" call sign "S2YA" Channel 16, and Channel 12. Four fixed shore and 10 mobile stations.

TUGS: Available, under direction of Pilot. None available at outer anchorage.

BERTHING: 12 jetties including 2 Pontoon jetties ranging in jetty face length from 435 ft. to 630 ft. Seven are provided with shore cranes, 10 with transit sheds and 8 with railway tracks. Additional 4 jetties for cargo in bulk like foodgrain, cement clinkers, etc.

Also 7 moorings for oil tankers of various lengths, 4 moorings for dry cargo, 2 moorings for lighterage.

CRANES: Variety of cargo handling equipment, maximum lifting capacity 125 tons.

TANKERS: Crude oil tankers up to a draft of 34 ft. can be handled at the Outer Anchorage.

Clean tankers enter the river and berth at petroleum jetties inside the port, restricted to length of 550 ft. overall, and subject to published river draft.

Tankers up to 60,000 d.w.t. discharge into lighters at Kutubdia anchorage where depth is 7 fathoms.

MEDICAL: Doctors and Hospital facilities available.

DENSITY: From 1000 to 1004.

FRESH WATER: Available from quays. Also available at outer anchorage. Require 3–4 days notice. Capacity of water barge about 300 tons. Supply daylight hours only.

FUEL: All grades available at oil berths. Otherwise supplied by barge.

REPAIRS: Facilities for repairs available. No dry docks. Ships' engines may not be dismantled or immobilised whilst at berths or moorings without the prior sanction of the Port Authority. Construction of a Dry dock is in progress.

HATCHES: Opened by ship's crew.

CUSTOMS ALLOWANCES: 200 cigarettes or 0.5 lb. of tobacco and 1 bottle of wine/spirit per week per man or 2 pints of beer per day.

REPATRIATION: Possible.

STEVEDORES: Available through Agent. Working hours, Monday to Thursday and Saturday day shift, 0730–1200 and 1330 to 1700 hrs. Night shift, including Friday 2000–2400 and 0000–0400 hrs. Friday, day shift, 0700–1200 and 1400–1700 hrs.

HOLIDAYS: Eid-e-Milad, Shaheed Day, Independence Day, Bengali New Year, May Day, Buddhu Purnima, Shabe Barat, Jumatul Wida, Eid-ul-Fitr, Durga Puja, Revolution Day, Eid-ul-Azha, Muharram, Victory Day, Christmas.

POLICE/AMBULANCE/FIRE: Call "Port Control" Channel 12 and 16 call sign, "S2YA" or tel. 207011.

CARGO GEAR CERTIFICATES: International Cargo Gear Test Certificates not more than 12 months old must be presented to the Dock Labour Inspector before a vessel is allowed to use derricks/winches. Annealing and testing of gear at Chittagong is an expensive process. In certain cases dispensation can be obtained at the discretion of the Dock Labour Inspector.

AIRPORT: Patenga Airport about 5 miles from city.

SHORE LEAVE: Allowed, prior permission from Immigration arranged by Agent.

DEVELOPMENTS: More berths to be constructed.

TIME: GMT plus 6 hours.

AUTHORITY: Chittagong Port Authority.

NOTES

Please also advise Shipping Guides Ltd.

Barbados

BRIDGETOWN: 13.05 N. 59.36 W. (See Plan Book)

DOCUMENTS:

8 copies Crew Lists.
5 copies Passenger Lists.
1 copy Health Certificate.
3 copies Ship Particulars.
1 copy Vaccination Report on Crew.
1 copy Vaccination Report on Passengers.
Deratisation Certificate.
2 copies Manifest.
1 copy Bill of Lading.
1 copy Clearance from Last Port.
2 copies Ship Stores List.
2 copies Crew's Declaration List.
1 copy Animal Declaration List.

Ship should be entered within 24 hours and articles deposited in Shipping Office if staying longer than 48 hours.

PILOTAGE: Pilotage compulsory for all vessels entering Bridgetown Harbour. Agents of vessels intending visit port required give ETA as early as possible on Form A. 4 hours notice weekdays and 8 hours Saturdays and Sundays are min. requirements.

Watch kept on VHF Channel 16, 156.80 Mc/s. Working frequency VHF Channel 12, 156.60 Mc/s. Pilotage vessels power-driven launches approximately 40 ft., painted grey. Signals for Pilot Boat: International.

Pilotage Station: 1 mile West of Breakwater Head. No alternative station in bad weather. Usual pilotage ladder in good condition should be rigged on port side when approaching harbour.

ANCHORAGES: Quarantine anchorage as indicated Admiralty Chart 502. Explosive anchorage as indicated on chart. Carlisle Bay anchorage see Chart 502.

RESTRICTIONS: Bridgetown Deep Water Harbour offers 24 hours service to ships with draft up to 31 ft. 6 in. A harbour for small craft (careenage) caters to ships up to draft 13 ft. 6 in. high water.

Tankers: May enter and leave any stage of tide, day or night, except Needham's Point where daylight berthing only.

MAX. SIZE: Max. length permitted in Deep Water Harbour 800 ft. Vessels of greater length allowed to berth if fitted with bow thruster. Draft 31 ft. 6 in. Oil Carriers Pier outside Deep Water Harbour max. draft 38 ft. Also see "Tankers".

HEALTH: Pratique may be obtained by radio or from Pilot or Health Officer on arrival. In case of suspected disease Port Doctor should be notified by radio through Agents.

Procedure for Granting of Pratique:

(1) The radio request should be sent not more than 18 and not less than 4 hours before the expected time of arrival.
(2) The message should be addressed to the Shipping Agent, who will inform the Medical Officer of Health (Port) of the contents of the Message.
(3) The Medical Officer of Health will inform the Shipping Agent whether or not pratique is granted, and the Shipping Agent will inform the Master, by radio, of the decision.
(4) The Medical Officer of Health will inform the officer on duty at the Signal Station whether or not radio pratique has been granted, and the officer on duty at the Signal Station will inform the Berthing Master and the Public Health Inspector of the decision of the Medical Officer of Health.
(5) The Berthing Master on boarding a ship which has been granted radio pratique will authorise the lowering of the Q flag, if still flying.
(6) The Berthing Master on boarding a ship which has not requested radio pratique will inquire as to the presence of any illness in the ship; if there is no illness, he will grant pratique in his capacity of Visiting Officer, *and will ensure that the Q flag is lowered.*
(7) If radio pratique has been refused or if the Berthing Master is informed that there is illness in the ship, the Q flag *must* be kept flying and the Public Health Inspector will board the ship, and if satisfied will grant pratique; if he is not satisfied he will refer the matter to the Medical Officer of Health (Port).
(8) Disembarking passengers (not passengers in transit) and any Crew members being signed off will be kept segregated on the ship until their vaccination Certificates have been inspected by the Public Health Inspector.
(9) No person except the Berthing Master, the Public Health Inspector, the Medical Officer of Health or the Immigration Officer will be permitted to board a ship before pratique has been granted. The granting of pratique is indicated by the lowering of the Q flag.

Notes: From the foregoing it will be seen:

(i) that healthy ships will be granted pratique either by radio or by the Berthing Master;
(ii) that ships with any illness on board will be granted pratique by the Public Health Inspector or the Medical Officer of Health;
(iii) That the Public Health Inspector will board a ship for the following reasons only:
    a. when radio pratique has not been granted and the Berthing Master cannot grant pratique;
    b. to inspect Vaccination Certificates of disembarking (not in transit) passengers and signed off Crew members.
(iv) that to avoid misunderstanding and delay the Q flag must be lowered as soon as pratique is granted.

(10) A ship with disembarking passengers may be granted pratique and permitted to work e.g. load or unload cargo, *provided* that disembarking passengers are kept segregated *on the ship* until Vaccination Certificates have been inspected and immigration formalities completed.

RADIO: Cable and Wireless, Barbados Radio: Call sign 8 PO. 24 hours watch is maintained on 500 kHz. ETA to include name and nationality of Master, number and nationality of Crew. Name of last and following ports of call and quantity and grades of cargo to be discharged, if any.

VHF: Barbados Radio VHF Channels 16 and 26. Barbados Port Department VHF Channels 12 and 16.

TUGS: Compulsory. Three tugs available, *Pelican, Culpepper* and *Barbados*, 1,100, 1,500 and 1,700 h.p. respectively. Tugs join ship at entrance to basin of the harbour; two tugs are compulsory for vessels over 10,000 tons or 550 ft. in length. Three tugs for vessels 20,000 NRT, or over. VHF and ship's radar installed on tug *Barbados*.

BERTHING: Harbour is situated on the North-Eastern side of Carlisle Bay, approximately 0.75 mile North-West of the Molehead of the careenage. This harbour is dredged to 32 ft. LWOST and was constructed by joining Pelican Island to the Mainland by reclamation, providing 1,700 ft. of quay space and 2,700 ft. approx. of protective breakwater, and offering berths for eight ocean-going vessels. All berths are equipped to supply water and telephone. Plans for expansion under active preparation.

BULK HANDLING FACILITIES: Inner arm of breakwater, 980 ft. long, carries three sugar loading towers, with total loading capacity 500 t.p.h.

Delivery points on breakwater for loading molasses.

Other cargo handling is by ship's gear to apron where removed by fork-lift trucks to transit sheds. One mobile crane 5 tons capacity and one of 20 tons. Management must be notified prior acceptance of lift in excess of 5 tons.

STEVEDORES: Gangs must be ordered before 1500 hrs. on day preceding date of arrival and 1000 hrs. on Saturday for Sunday or following Monday. Average rate of cargo discharged:

Bag Stuff, 22 tons (weight) per hour.
General Cargo, 12 tons (weight) per hour.
Ships specially equipped for handling palletised cargo, 30 tons per hour.
Average rate of loading of cargo: General cargo 12 tons; Bag Stuff 18 tons.

MEDICAL: Agents should receive advance notice of required medical attention as soon as possible. Modern 800 bed hospital. Private clinics and usual medical facilities available.

TANKERS: Vessel's arriving during darkness for Needham's Point Terminal should anchor in Carlisle Bay. Services of a Pilot are not compulsory but a Pilot must be taken to berth and unberth.

Needham's Point: Mobil Oil Barbados Ltd. Multi-buoy-mooring Max. LOA, 600 ft. Max. draft, 33 ft. Depth at MLW, 40 ft. Nature of bottom, sand on coral. Daylight berthing only. Vessels may berth and unberth any stage of tide. No fuel or dirty ballast facilities. Fresh water available by tug. Product handled, crude oil. Sealine taken aboard on starboard side. One 12 in. pipe-line, length 1,635 ft. connected to 1×10 in. hose. Pumping rate 300 t.p.h. max. pressure, 50 p.s.i.

Esso Standard Oil S.A. Ltd.: 2 berths. Esso Jetty outside breakwater. "T"-Head finger jetty. Max. LOA, 800 ft. Max. draft, 38 ft. Depth at MLW 55 ft. Vessel berths port-side alongside.

Deep-water Harbour Oil Pier: Max. LOA 800 ft. Max. draft 30 ft. Depth at MLW, 32 ft. Vessels berth either side alongside.

Fuel and fresh water available. No facilites for receiving dirty ballast.

Berth	*Grade Handled*	*Pipe-line ins.*	*Length (ft.)*	*Load/ Discharge Rate (t.p.h.)*	*Hoses ins.*
Esso Jetty	Bunker C	1×16	2000	400	1×8
	Marine Diesel	1×12	2000	270	1×8
	Light Marine Diesel/gasoil	1×8	2000	150	1×8

Max. Pressure 100 p.s.i.

DENSITY: 1025

FRESH WATER: Easily available. Delivery 50 t.p.h. Delivery by hose-pipe through hydrants installed in each berth.

FUEL: Bunker C, marine diesel, marine diesel medium (gas oil). Intermediate fuel, all grades available at all berths. 12 hours notice in advance of ETA.

DEVELOPMENTS: The Port is undertaking an expansion project and with its implementation, activities will be concentrated in the Port. The project includes land reclamation, the construction of a container shed, a shallow draft facility and a bulk handling facility. Provision is also made for the construction of a new administration building and the installation of ancillary services.

This expansion is to be completed by 30th June, 1978. The quay wall has been extended by 600 ft. principally for container ships. There is a shed for the purpose of sorting out and unloading containers. There is also a dredged channel which would allow vessels to be piloted to the Flour Mill docks or further inward to the Shallow draft (facility) dock. Deepest draft to the Flour Mill is 31 ft. 6 ins. and to the Shallow draft berth is 18 ft. The new administration building is also to be completed at that date.

GANGWAY/DECK WATCHMEN: Watchmen's services necessary.

OPENING/CLOSING HATCHES: By stevedores.

SHIP CERTIFICATES: Load Line Certificate, Certificate of Registry.

TOBACCO ALLOWANCE: Two packages or 100 cigarettes per person.
WINES AND SPIRIT ALLOWANCE: At discretion of Customs Officer.
IDENTIFICATION CARDS: Desirable for entrance to port from shore leave.
CONSULS: Following countries are represented at Bridgetown:

- Austria
- Belgium
- Dominican Rep.
- Finland
- France
- Germany
- Great Britain
- Mexico
- Netherlands
- Norway
- Sweden
- U.S.A.
- Venezuela

REPAIRS: Minor repairs can be carried out by Central Foundry Ltd.
DRY DOCK: One small dry dock length 240 ft., breadth 46 ft., depth 13 ft. Lifting capacity 930 tons displacement.
SURVEYORS: Salvage Association. G. Pringle. Tel. 63512.
REPATRIATION: Facilities for crew changes available.
AIRPORT: Served by regular lines. Distance from harbour about 13 miles. Island is served by flights from Europe and from N. America.
TIME: GMT Minus 4 hours. DST (Daylight Saving Time) 1 hr. advanced is now being used from 16th April to 22nd October every year.
TELEPHONES: All berths equipped with telephones.
AUTHORITY: Government of Barbados, Port Department.
AGENT: C. F. Harrison & Co. (Barbados) Ltd., PO Box 304, Barbados, West Indies. Cables "Harrison Barbados" Telex: 267 WB.

NOTES

Please also advise Shipping Guides Ltd.

Belgium

ANTWERP: 51.14 N. 04.23 E. (See Plan Book)

DOCUMENTS:
Ship's Register.
2 Lists Passengers in Transit.
2 Lists Passengers Disembarking.
2 Personal Effects Lists.
3 Crew Lists indicating full date of birth.
2 Store Lists indicating alcoholic beverages in bottles and size of bottles.
International Health Declaration.
Manifests and usual ship documents.

PILOTAGE: Access to River Scheldt is:

(*a*) Via Wielingen Channel (West) (Wandelaar Station) where Belgian sea pilot cutter is stationed near A.1. Buoy. Cutter has black hull with a white number on bow, yellow funnel with black top, red flag with white letter "P".

(*b*) Via Oostgat Channel (North) (Steenbank Station) where Dutch sea pilot cutter is lying near the Middelsteen bank buoy.

The pilot cutters of both cruising stations can be called by the signals of the international code. They can also be contacted on VHF Channel 6.

ETA: Pilot cutter Wielingen or pilot cutter Oostgat should be given at least 4 hours notice before arrival at the pilot cutter, respectively via Ostend Radio (OST) to "Pilotage Ostend" or via Scheveningen Radio (PCH) to "Pilotage Flushing".

In case pilot service is suspended because of weather conditions, Flushing Pilot Station can be contacted on VHF Channel 14. At Flushing, the sea Pilot disembarks and the river Pilot boards the vessel and pilots her to the riverside berths or to the locks. For vessels bound for a berth in the docks, the dock Pilot takes over in the lock until the vessel is moored in berth.

DEEP SEA PILOTAGE: See "Brixham" or "Cherbourg".

ANCHORAGE: There is sufficient anchorage for deeply loaded vessels at all times around the A.1 buoy, and for smaller vessels around the MSB buoy. There are unlimited possibilities for anchoring at Flushing roads. Anchorage on the river is limited.

RESTRICTIONS: No restrictions on night entry. Tankers larger than 2,000 g.r.t. destined for berths on the river upwards of Baudouin-Van Cauwelaert-locks are not allowed to transit during hours of darkness.

LOCKS: Royers Lock, length 590 ft., width 72 ft. 2 in., depth at high tide 36 ft. 4 in.

Van Cauwelaert Lock, length 885 ft., width 115 ft., depth at high tide 49 ft. 2 in.

Boudewijn Lock, length 1,180 ft., width 147 ft., depth at high tide 50 ft. 10 in.

Zandvliet Lock, length 1,639 ft., width 187 ft., depth at high tide 60 ft. 8 in.

Kattendijk Lock, length 360 ft., width 81 ft. 4 in., depth 20 ft. 7 in.
Kallo Lock, length 480 ft., width 165 ft., depth 52 ft. 6 in.

MAX. SIZE: At high water under normal weather circumstances and depending tidal conditions vessels up to 820 ft. in length may enter on a max. draft of 44 ft. 6 in. (F.W.). Depending on a reduction of the allowed draft, larger vessels up to 900 ft. L.O.A. are accepted and providing a special permit vessels up to maximum 1,000 ft L.O.A. and 145 ft. beam can be admitted under certain conditions. It is however advisable to check in each case what maximum draft will be allowed for a specific vessel.

Vessels with less than 27 ft. draft can enter on all stages of the tide.

HEALTH: No special requirements to obtain free pratique. Vaccination Certificates must be valid. Recent Derat Certificate required. In case of contagious illness aboard, advise Agent.

RADIO: Cable Agents ETA Flushing, max. fresh water draft, and requirements via Ostend Radio-OST or OSU (radio telephone). Radio Antwerp-OSA operates only on medium frequency.

RADAR/VHF: A radar chain established from Hansweert to Kruisschans Roads, but only used to help Pilot determine position. Masters can keep close contact for information, day and night, on the following Channels: Pilot cutter Channel 6 – Flushing Radio Channel 14 – Zandvliet Radio Channel 12 and 14, when in appropriate sector – Harbour Office Channel 18 – A radar chain, using, depending the zone, the VHF Channels 19, 21 or 4 for communication, is established between Hansweert and Zandvliet-lock, but only used to assist the Pilot to determine position.

Vessels not equipped with VHF can rent a portable portaphone. The Scheldt information service gives information by VHF within an area extending from the sea to the mouth of the river Rupel, situated upstream of Antwerp. On every full hour plus 5 minutes until that hour plus 10 minutes, vessels should switch to Channel 16 to listen to the traffic list and navigation reports, issued by Antwerp Radio.

On every full hour plus 35 minutes, Flushing Radio (Channel 14) and Kruisschans Radio (Channel 12) transmit information regarding visibility, water level, hindrances, anchorages, etc.

As soon as one of the stations reports a decrease of visibility under 3,000 m., visibility reports are transmitted by Antwerp Radio on every hour plus 48 minutes.

TUGS: Tugs for berthing at a riverside berth or entering the lock are ordered at river Pilot's request according to weather conditions and tide. Generally at Lieftkenshoek for Van Cauwelaert and Baudouin Locks and between Saftingen and N. Ballast Fort for Zandvliet Lock. For super-tankers, tugs may join at Bath. Ship's lines are usually used for towage. If ship asks for tug lines there will be an extra charge per line.

The number of tugs required in the dock area shall be mentioned on the "hailing bill". Eventually, "according to dock Pilot's advice" can be mentioned.

36 tugs available, up to 2,200 h.p.

BERTHING: Deeply loaded vessels normally moor at their berth in the docks 2 hours after high water.

BULK HANDLING FACILITIES: *Container Terminals:* At the Churchill dock 6 terminals belonging to private firms operate in total 8 container cranes with lifting capabilities from 40 to 53 tons and 3 other 38 ton cranes suitable for container handling. 3 other 30 ton gantry cranes at railroad terminal. Full series of straddle carriers, etc.

Grain:

1. Sobelgra Terminal at sixth harbour dock has 5 elevators with capacity of 400 t.p.h. each for unloading and 2 elevators with combined capacity of 900 t.p.h. for loading seagoing vessels. Elevators are combined with conveyor belts for direct transhipment or storage in silo (106,000 tons). Water depth 48 ft. in dock for seagoing vessels, 24 ft. in dock for barges. Quay length 1,200 ft.
2. Grain handling plant of S.A. des Magasins a Grains (SAMGA) at Lefebvre dock. Quay length 350 m., draft 32 ft. fresh water, silo 120,000 tons, 4 elevators on quay plus use of floating elevators. Discharge rate 500 t.p.h. Loading rate 1,000 t.p.h.
3. Smaller installation of De Trouw (silo 10,000 tons) and Van der Stucken (silo 4,000 tons).
4. Sarandi terminal for seeds at Canaldock B1: storage capacity 18,000 cu.m.

Potash: Plant situated at quays No. 152/160 in the Albert dock, can accommodate vessels up to 35 ft., fresh water draft. Loading rate up to 6,000 tons per day. Storage capacity 200,000 tons.

Ore/coal/phosphate: Stocatra: Bulk handling plant situated at quays No. 232/254 of Hansa Dock. quay length 1,200 m., depth alongside about 43 ft., clearance of grabs above water level 15 m. Up to 48,000 tons of ore can be transhipped in 24 hours, out of 1 vessel.

Equipment: 6 travelling bridges 15 tons.
8 travelling bridges 25 tons.

SGM: Terminal at Canaldock: 2 bridges of 21 tons plus 1 bridge of 30 tons for non-ferrous ores. Quay length 500 ft., depth 50 ft., max. discharge rate 3,000 t.p.h. average discharge rate 2,400 t.p.h.

Coal terminal Vloeberghs: 3 cranes 10 tons. Quay length 300 m., Several smaller installations for coal.

Sulphur: Transhipment installations of Duval Sales (Antwerp Tank Cleaning) near Boudewijn lock with covered storage over 100,000 sq. ft.

Soda: The Solvay concern has built specialized warehouses on the south quay of the 5th Harbour dock, comprising 14 silos with a capacity of 6,700 tons of soda products. This installation is equipped with 10 cranes, 3 transporter bridges and 4 km. of conveyor-belt.

Fertilizers: Besides quays of chemical plants such as Bayer and BASF there are specialized terminals for fertilizers mainly at third harbourdock (Manuport) and Canaldock B1 (Manufert) and Ferchimex (the latter used for fertilizer, sulphur, phosphates etc.).

Total covered warehousing space for chemical fertilizers is 38,405 sq. m.

Other specialized installations include:

Refrigerated storage:	396,000 cu.m.
Tank storage capacity:	10.2 million cu.m.

CRANES:

Container cranes	(35/53 t)	12
Quay cranes	(2.5/100 t)	481
Floating cranes	(5/250 t)	24
Mobile cranes	(5/90 t)	125
Loading bridges	(15/25 t)	18
Grain elevators:	on quay	17
	floating	11

TANKERS: *S.I.B.P.* Petroleum installations located at the Marshall Dock and finger pier jetties No. 429-437 near the locks. Depth alongside about 43 ft. Hoses all 12 in. Facilities for ballast discharge. Bunkers ex pipe-line or barge.

Esso: Refinery receives crude oil along quays No. 417 to 421 of Hansa Dock and one pier in the Marshall Dock. Depth alongside 45 ft. Hoses 12 in. and 16 in., hydraulic couplings. Slop discharge possible when berth is free. Oils can be received at the rate of 4/5,000 t.p.h. Water from the quay. Bunkers ex pipe-line or barge.

Albatros: Refinery situated near Zandvliet Lock. Quay No. 661–665, depth 37 ft., Berth No. 2, depth 42 ft. Ballast discharge possible. Crude Oil is received at the rate of 5/6,000 t.p.h. Bunkers ex-barge or pipe-line.

R.B.P: Refinery at quays No. 279-285 in the fourth port basin. Depth alongside 37 ft. Oil is received at the rate of 3,500/4,000 t.p.h.

Petrol Pier South, Hemixem: One tanker berth in the river subject to tide. Max. ship's length restricted to 650 ft. Max. draft 32 ft. fresh water. Served by one 16 in. pipe-line. No facilities for slop discharge. Oil is received at the rate of 500/700 t.p.h. Tidal range 5 m. As only one large tanker can be accommodated, other tankers have to wait their turn in Flushing Roads.

Nafta: Situated on Canal Dock B–2, One pier, max. depth 50 ft. Crude oil received at rate of 6,000 t.p.h.

A tank-cleaning installation is situated between the Boudewijn Lock and the Bayer Plant.

STEVEDORES: To enable Agents to order gangs, important to obtain ETA Flushing before arrival. Latest time to order gangs, normal day shift 0800-1545 before 0630 hrs. same day. First shift 0600-1345, before 1400 hrs. previous day; second shift 1400-2145 before 1230 hrs. same day; night shift 2200-0545 before 1500 hrs. same day. First shift Monday, from 0600 to 1345 before 1400 hrs. previous Friday. Failure to give exact ETA may result in losing 12 to 24 hours and the cost of gang's idle time. No work performed on Saturday and Sunday unless overtime paid.

MEDICAL: Ample medical attendance in the port. Hospital facilities available.

DENSITY: Fresh water in the docks, slightly brackish in the river.

FRESH WATER: All berths supplied by shore connections. Fresh water available by barge.

FUEL: All grades available. Min. 24 hours advance notice preferred. All grades can also be supplied by barge. Tankers may not refuel by barge concurrent with working cargo or ballast.

FIRE PRECAUTIONS: No floating objects allowed alongside during loading/discharge/ballasting.

DEVELOPMENTS: The navigable channel and estuary are dredged continuously. The latest plans foresee the bypass of the curve at Bath, shortening the distance to the sea by about 10 miles and making port (right bank) accessible for vessels up to 125,000 d.w.t. Now maximum draft of vessels is 45 ft.

At right bank new dock (quay length 4,700 m.) water depth 40 ft. is under construction (completion expected 1980).

At right bank junction between fifth harbour dock and America dock nearing completion (to be completed 1978–9) (new lock planned).

At left bank: Lock nearly completed (not yet made operational – depends on development of Left Bank Port. 1,180 ft. × 165 ft. × 52 ft. 6 in. First canal dock on left bank under construction.

New Scheldt-Rhine link (for 9,000 tons push convoys) has been opened.

Albert Canal (Antwerp-Liege) is being modernized for 9,000 ton push convoys.

GANGWAY/DECK WATCHMEN: Not compulsory but recommended in general and specially for ships berthed at river quays because of rise and fall of tide.

OPENING/CLOSING HATCHES: Normally opened/closed by crew. Stevedores usually helping lift beams. Tramp vessels according charter party.

SHIP CERTIFICATES:
Registered Tonnage Certificate.
Derat. Certificate.

CUSTOMS ALLOWANCES: 200 cigarettes or 100 cigarillos or 50 cigars or 250 gr. tobacco per man. Spirits 0.25 litres per head.

IDENTIFICATION CARDS: Not required.

CONSULS: The following countries are represented:

Argentina
Austria
Bangladesh
Bolivia
Brazil
Chile
Colombia
Costa Rica
Cuba
Denmark
Dominican Republic
Ecuador
El Salvador
Finland
France
Germany
Ghana
Great Britain
Greece
Greek Maritime Office
Guatemala
Haiti
Honduras
Iceland
Indonesia
Ireland
Italy
Japan
Lebanon
Liberia
Luxembourg
Madagascar
Malta
Mexico
Manaco
Morocco
Nepal
Netherlands
Nicaragua
Norway
Pakistan
Panama
Paraguay
Peru
Philippines
Poland
Portugal
Senegal
South Africa
Spain
Sweden
Switzerland
Turkey
U.S.A.
Upper Volta
Uruguay
Venezuela

REPAIRS: All kinds of repairs possible.

DRY DOCK: Beliard Murdoch: No. 1, length 738 ft., breadth 109 ft.; No. 2, length 885 ft., breadth 134 ft. Mercantile: 6 docks from length 480 ft., up to 1,024 ft., breadth 60 ft. up to 165 ft. City dry docks: 10 docks from length 169 ft. up to 685 ft., breadth 30 ft. up to 83 ft.

REPATRIATION: All arrangements for crew changes and repatriation can be made.

AIRPORT: Zaventem Airport (distance 50 km.) served by regular airlines. Antwerp airport Deurne (distance 15 km.) only regular service with Amsterdam and London (3 flights per day). Plans to extend.

TIME: Summertime: April to September (April to October in 1978) GMT plus 2 hours. Remainder of year, GMT plus 1 hour.

HOLIDAYS: New Year's Day; Easter Monday; 1st May; Ascension Day; Whit Monday; 21st July; Assumption (15th August); 1st November; 11th November; Christmas Day. Plus the replacement days when New Year's Day; 1st May; 21st July; Assumption; 1st November, 11th November or Christmas Day fall on a Saturday or a Sunday. Cargo work can be arranged when labour available and at surcharge 100 per cent.

POLICE/AMBULANCE/FIRE: Harbour Police tel. 32.18.40; Alarm and accidents tel. 906; Ambulance tel. 900; Fire tel. 900.

TELEPHONES: At shipyards and oil terminals telephone is placed on board or in the vicinity without extra cost for local calls. Long-distance calls at special request.

AUTHORITY: City of Antwerp Port Control.

AGENTS: Muller-Thomsen, Antwerpen N.V., 9, Ankerrui, Antwerp. Tel. (031) 338920. Telegrams Mineral. Telex 31259.

BRUSSELS: 50.51 N. 04.22 E. (See Plan Book)

DOCUMENTS: Same as Antwerp and to be handed to Agent at Antwerp roads, where clearance obtained.

PILOTAGE: Notice of ETA Antwerp roads should be given 24 hours beforehand to Antwerp Agent, who will apply for upper Scheldt Pilot. This Pilot takes over at Antwerp roads and brings ship up Rivers Scheldt and Rupel to Wintam lock. Canal Pilot boards Wintam lock. Boatmen service on canal optional, but advisable for ships over 164 ft. length and according weather conditions. Boatmen for possible mooring Wintam lock entrance always available. Wintam equipped with VHF.

ANCHORAGES: Use of anchors strictly regulated on canal and only permitted certain areas in emergency.

ENTRY RESTRICTIONS: Ships proceed upstream from Antwerp to Wintam day and night accordance state of tide, direction of current, length and draft.

MAX. SIZE: Overall length: 344 ft. 06 in.; Extreme breadth: 48 ft. 02 in.; Max. draft: 19 ft.

HEALTH: See "Antwerp".

RADIO: See "Antwerp".

VHF: Wintam lock and tug boats equipped with VHF.

TUGS: Normally tug joins vessel Wintam lock. Ship's lines always used. Although not compulsory, towage advisable in accordance length and draft or weather conditions.

BERTHING: No specific requirements for berthing in canal. Owing to dense traffic, ships should moor strongly.

The Brussels' Harbour extends over a length of 12.5 km. between Brussels (Sainctelettesquare) and Grimbergen (Pont-Brule).

The Inner port offers: 14 km. of quays and mooring berths 220,000 sq. m. of wharf areas. 390,000 sq.m. of storage areas. 169,000 sq. m. of warehouses.

Materials quay: Length: 710 m. Number of berths: 15. Draft: 3.5 m. 2 cranes of 2 tons lifting power, owned by the Canal Company.

Barges quay: Length: 710 m. Number of berths: 15. Draft: 3.5 m. Equipment: 1 crane of 2 tons lifting power owned by the Canal Company. 1 private installation for cargo handling.

Shipowners quay: Length: 920 m. Number of berths: 15. Draft: 6.5 m. Equipment: 3 cranes of 2 to 4 tons lifting power owned by the Canal Company. 6 private installations for cargo handling.

Steamers quay: Length: 920 m. Number of berths: 15. Draft: 6.5 m. Equipment: 7 private installations for cargo handling.

Factories quay: Length: 2,000 m. Draft: 6.50 m. (along the quay wall: 3.20 m.)

Leon Monnoyer quay: Length: 1,800 m. Number of berths: 20. Draft: 6.5 m. Equipment: 11 cranes from 3 to 10 tons lifting power, owned by the Canal Company. 9 private installations for cargo handling.

Heembeek quay: Length: 360 m. Number of berths: 4. Draft: 6.5 m. Equipment: 9 private installations for cargo handling.

Industrial Harbour Section: Length: 6,000 m. Number of berths: 60. Draft. 6.5 m. Equipment: 59 private installations for cargo handling, (electric cranes from 1 to 10 tons lifting power, grain elevators, belt conveyors, suction devices.)

Maritime Canal: Length: 20 km. Draft: 6.5 m. Equipment: 26 private installations of cargo handling.

SPECIALISED CARGO HANDLING FACILITIES: Private Cargo handling facilities exist in the whole of the Industrial Maritime Canal for grain, coal, fertilisers, liquid chemicals and L.P.G.

BRIDGES: Ships can reach outer harbour with clearance of 100 ft. and pass under fixed bridges to inner harbour with clearance of 20 ft. Road bridges open on demand. Railway bridges open according timetables, which subject to change.

STEVEDORES: Arrangements made by Agents.

MEDICAL: No notice required for medical attendance. Hospital facilities available. In case of accident or emergency call phone number 900. No particular inoculations or certificates required.

TANKERS: Oil usually imported by tank barges. No slop facilities. Max. draft permitted for wine tankers, gas tankers and acid carriers: 19 ft.

DENSITY: Canal is fresh.

FRESH WATER: Fresh potable water delivered from shore in Willebroek lock at average rate of 10 t.p.h. during passage through lock, and in outer harbour at maximum rate of 20 t.p.h. according diameter of hose.

FUEL: All grades available. At least half a day notice should be given.

FIRE PRECAUTIONS: The usual precautions to be taken by tankers and ships handling inflammable or dangerous goods.

DEVELOPMENTS: Complete schedule for modernising canal, including building two larger locks, widening and deepening canal to be worked out over several years. Works of first new lock near present Kapellelock already completed.

GANGWAY/DECK WATCHMEN: Services of shore watchmen optional.

OPENING/CLOSING HATCHES: Carried out by ship's crew.

IDENTIFICATION CARDS: Not needed.

AIRPORT: Brussels Airport served by regular airlines. Air terminal situated in town centre, directly connected with Airport by special railway.

HOLIDAYS: Official Holidays Belgium: January 1 (New Year), Easter Monday, May 1 (Labour Day), Ascension Day, Whit Monday, July 21 (National Holiday), August 15 (Assumption Day), November 11 (Armistice Day), December 25 (Christmas). Most offices closed on Saturdays.

CONSULS:

Algeria	02	537.81.33	537.82.41
United Kingdom	,,	219.11.65	
Denmark	,,	217.11.31	
Spain	,,	511.73.90	
Finland	,,	512.98.93	
France	,,	217.31.79	217.24.63
Germany (Fed. Rep.)		770.58.30	
Greece	,,	217.76.14	
Iceland	,,	512.59.65	
Italy	,,	537.19.34	537.90.56
Liberia	,,	344.49.40	
Luxemburg	,,	733.99.77	
The Netherlands	,,	511.39.60	
Norway	,,	736.20.45	
Panama	,,	512.66.30	
Portugal	,,	538.47.90	
Switzerland	,,	512.78.43	
Tunisia	,,	734.91.78	

REPAIRS: No shipyards in Brussels, but in Boom and Temse, not far from Brussels, and Antwerp. Minor deck and engine repairs by small shipyard on canal.
REPATRIATION: Arrangements for repatriation can be made with maritime authorities on Antwerp roads when proceeding Brussels. Consuls in Brussels arrange for crew changes or rèpatriations (Consulates closed Saturdays, Sundays and Holidays).
POLICE/AMBULANCE/FIRE: General call, Ambulance/Fire: 900; Police: 906; Fire: 02/511.55.55.–512.22.22. Police 02/513.28.40.
TELEPHONES: Only placed for warships at one particular berth.
GENERAL: Bus 47 near left bank and street-car 58 near right bank of outer harbour, lead to town centre (10 minutes). General Information Office situated on de Broukeresquare (town centre). Ship stores can be obtained, but no bonded stores.
SHORE LEAVE: Crew members allowed ashore without restriction.
REGULATIONS: At night only main gate of outer harbour on right bank is open.
AUTHORITY: "Societe du Canal et des Installations Maritimes de Bruxelles" (Port of Brussels Authority).
AGENT: See "Antwerp".

GHENT: 51.02 N. 03.44 E. (See Plan Book)

DOCUMENTS:

2 Crew Lists (Benelux forms).
2 Passenger Lists.
2 Store Lists.
2 Lists personal effects of crew, such as camera, radio, cigars, cigarettes, tobacco, etc.
1 Bill of Health.
1 List of Dangerous Cargo.
1 Manifest or Bill of Lading.

PILOTAGE: Cables 24 hours in advance to: "Belgisch Loodswezen, Vlissingen", when coming from the West; "Nederlands Loodswezen, Vlissingen", when coming from the North. Radio VHF Pilot boat West: Channel 6; North: Channel 6; VHF Vlissingen: Channel 14.

Pilot boat positions: West: Wielingen Buoy A.1; North: NSB Buoy.

Anchorages if awaiting Pilot: West: Buoy Scheur No. 2, between A.1 and Akkaert Buoy; North: Schouwendiep, Middeldiep. Schelde: Roads Flushing, Pit of Terneuzen, Everingen, Braeckman and Sloe.

Signal to require Pilot assistance: West, Night: "G", if VHF give destination; Day: "G Flag". North, Night: "G"; Day: "G".
ANCHORAGES: Terneuzen Roads.
RESTRICTIONS: None, navigation day and night, but over 32 ft., tidal entrances.
MAX. SIZE: Length 245 m.; beam 33 m.; draft 12.25 m. (F.W.). Turbine powered ships: Length 235 m.; beam 33 m.; draft 11.75 m.
HEALTH: Medical Officer of Public Health Service "Saniport-Ghent" inspects Bill of Health.
RADIO: Cable Agents ETA, draft, cash required: via Ostende Radio "OST" for vessels coming from West; via Scheveningen Radio "PCH" for vessels coming from North.
TUGS: Meet vessels Terneuzen Roads; ships use own lines.
VHF: VHF port operations Channels 5, 6 and 11. Channel 11: working channel on the ship canal Ghent–Terneuzen. Channel 5: Port Operations Ghent. Channel 6: Intership.
BRIDGES: Three bridges on Ghent/Terneuzen canal, Sluiskil, Sas-van-Gent, and Zelzate bridge. All open day and night, on signals by Pilots.
BERTHING: Berths for largest vessels able to enter the port are at Sifferdok, Texaco Dok, Rodenhuize Dok, and Sidmar Wharf. Other docks available for smaller tonnage, accommodating 6,000 to 8,000 d.w.t.
STEVEDORES: Will be advised by Agents of ETA, and must be ordered, by noon in order commence at 0600 next working day (first shift); by 1600 to commence 0745 following day (normal working day); by 0700 to commence 1400 same day (afternoon shift); by 1000 to start 1330 (for half a working day).
MEDICAL: Agents to be advised by radio or cable if urgent assistance required. Hospitals available. First aid tel. 900.
TANKERS: Berths: Fina, Anglo Belge des Petroles, Rodenhuize, and Texaco. Texaco have pipe-lines for loading and discharging 10 in. but all kinds of fittings available. Slop discharge: Two tanks each 40,000 barrels available; vessels to discharge by own power.

S.G.:

Aeroplane fuel	770	Diesel oil	825
Light gas-oil	840	Fuel	735
Super fuel	745	Half light gas-oil	935
Heavy gas-oil	950		

Two berths at Texaco each with one main and one spare pump for each product. One berth at Rodenhuize. Each capable accommodate 60,000 d.w.t. vessels. Max. draft 12.25 m.
DENSITY: Fresh.
FRESH WATER: Supply by boat. Supply within normal working hours at 85 fr. per cu. m. Supply outside normal working hours at 145 fr. per cu. m., with a supplement ranging from 800 to 3,600 fr. A minimum of 10 cu. m. will always be charged.
FUEL: All grades delivered by barges or trucks. At least 24 hours notice required.
SPECIALISED CARGO HANDLING FACILITIES:

Three roll-on/roll-off berths exist on the right bank of the Sifferdok. Each berth can accommodate ships with a draft of 12.25 m.

The installations of Eurosilo situated at the end of the Sifferdok offer facilities for bulk cereals and cattle fodder. Loading and discharging at a rate of 1,000 t.p.h. Storage capacity of the silos, 86,000 tons in 40 cells. Ghent Grain Terminal, situated at the Rodenhuizedok, will be operational as from 1st July, 1978, storage capacity 60,000 tons.

The Compagnie Belge de Manutention (CBM) situated on the left bank of the Sifferdok is specialised in handling heavy goods in bulk, such as pyrites, ores, phosphates, coal, pitch-coal, etc. by transporter bridges of 10 and 15 tons. Also mechanical shovels for the discharge of bulk goods in closed wagons and funnel wagons. Total storage capacity, 2,500,000 tons.

The same commodities are also handled by CBM in the Zuid and Middendok; grab discharge with 10-ton cranes.

Liquid chemicals are currently handled at the Ug. Kuhlmann factory in Rieme on the left bank of the canal, most commonly liquid sulphur and propylene. No berths for L.P.G. carriers exist in Ghent.

Specialised berths where equipment for handling fertilisers is available are No. 27 (Grootdok) and No. 83 (Sifferdok). Cranes for grab discharge, funnels and conveyor-belts.
WATCHMEN: Not compulsory, but available. Price for working days: plus/minus BF 1,500.0 per 12 hours shift.
HATCHES: Opening and closing by crew.
SHIP'S CERTIFICATES: Belgium Tonnage Certificate required.
CUSTOMS ALLOWANCE: Each crew member: 200 cigarettes, or 50 cigars, or 250 gr. tobacco, or 100 cigarillos. Wine practically free: Spirits: one opened bottle each man.
IDENTIFICATION CARDS: Not needed. Seaman's books only.
CONSULATES:

Germany	Tel.	25.91.68	Guatemala	Tel.	25.88.61
Central African Republic	,,	28.10.81	Haiti	,,	25.22.37
			India	,,	26.34.23
Chile	,,	53.89.65	Italy	,,	25.85.66
Korea	,,	22.68.03	Norway	,,	51.25.21
Costa Rica	,,	25.04.15	Panama	,,	52.31.27
Denmark	,,	26.65.62	Netherlands	,,	25.18.16
Finland	,,	23.50.11	Peru	,,	28.20.83
France	,,	25.97.30	Portugal	,,	51.12.32
Great Britain	,,	23.08.20	Sweden	,,	26.19.26
Greece	,,	25.58.91	Tunisia	,,	26.41.42

REPAIRS: Practically all kinds of deck/engine repairs possible.
DRY DOCKING: Only for smaller vessels. There are 2 dry docks managed by the City Corporation.

(1) Length: 130 m.; beam 13 m.; depth 5.25 m.
(2) Length: 76 m.; beam 11 m.; depth 4 m.

REPATRIATION: Adequate facilities.
AIRPORTS: National airport Zaventem near Brussels; 35 miles from Ghent. All world airlines. Ostend Airport (Middelkerke) 45 miles.
TIME: GMT plus 1 hour. Summertime, GMT plus 2 hours (from beginning April to end of September).
HOLIDAYS: New Year's Day; Easter Monday; Labour Day (1st May); Ascension Day; Whit Monday; National Day (21st July); Assumption Day (15th August); All Saints Day (1st November); Armistice Day (11th November); Christmas Day. Cargo can be arranged on these days at special rates.
TELEPHONE: Police 906; Ambulance 900; Fire Brigade 25.32.41; Water Bailiff 51.00.20; Port Taxi 51.09.88; Port Authorities 51.04.57.
AUTHORITY: City Corporation of Ghent, Port Administration.
AGENT: See "Antwerp".

OSTEND: 51.14 N. 02.55 E. (See Plan Book)

DOCUMENTS:

2 Crew Lists or Passenger Lists.
4 Cargo Manifests.
2 Copies Bills of Lading.
3 Freight Lists prepared by Agents.
2 Customs Provision Lists prepared by Agents.
General declaration prepared by Agents.
Customs declaration outward bound prepared by Agents.

PILOTAGE: *(a)* from Pilot boat between "S.W. Akkaert" and "A.1" lightbuoys. Black hull, white number forward on both sides of hull, yellow funnel black top. Displays by day at top of mast, red square flag with letter P in white; by night lights prescribed by International

Regulations. Contact Pilot boat: Channel 6 VHF. Morse or flag signal: G.8. In low visibility: sound signal G.8 to be made at least 3 seconds after usual fog signal. Pilot boat answers with sound signal H at least 3 seconds after sounding prescribed fog-signal.

Anchorage awaiting Pilot: between S.W. Akkaert, N.E. Akkaert and A.1 lightbuoys. Depths at least 18 m. MLLWS. Advice from Pilot boat VHF Channel 6. If Pilot boat not on station, shipping informed by Ostend Radio in radiotelephonic frequency 2761 kHz (108 m.) announced on 2182 kHz (137 m.) on following hours: 0103–0803–1303–1603 and 2103 GMT.

(*b*) from Pilot station Ostend. ETA to "Pilot station Ostend" via "Radio Ostend" at least 2 hours before arrival. Harbour Pilot boat will meet as far as 51° 15′ 30″ N. 2° 30′ E. Pilot boat shows by day: red square flag white P; by night: international prescribed lights. Anchorage: 51° 15′ 30″ N. 2° 30′ E. Depths: at least 7 m. MLLWS. Pilot station Ostend operates VHF Channel 9 (only for Pilotage matters).

RESTRICTIONS: Any restrictions imposed are shown on mast of signal station at end of Eastern harbour entrance pierhead.
MAX. SIZE: Entrance of lock to Commercial Docks restricted to max. beam 57 ft. 6 in. and draft max. 24 ft. Entrance to lock of Fishing Port restricted to ships with max. beam 50 ft. and max. draft 23 ft. Harbour channel restricted to 30 ft. draft.
HEALTH: Pratique obtained from Belgian Pilot. Any advice on health matters also obtainable from Pilot services.
RADIO: Ostend Radio – OST.
TUGS: Government tug 1250 Pk available, meets outside harbour. Tug lines optional; charge for use of tugs' lines: BRT 250 tons and less: 40 FB per half hour. BRT more than 250 tons: 50 FB per half hour.
BERTHING: According draft. Any specific instructions given by Harbour Pilots or Agents.
BULK HANDLING FACILITIES: Roll-on/roll-off berths in timber dock and on deep water quay with facilities for loading and unloading containers.
STEVEDORES: ETA advices week-days before 0600 hrs. For Sat. or Sunday work advise before 1500 hrs. Fridays. All stevedoring arrangements made by Agents.
MEDICAL: Advance notice to Agents for medical attention 6 hr. before arrival. Hospital services available. Medical information can be obtained on R/T via Ostend Radio.
TANKERS: Only small coastal tankers. Only discharge in Fishing Port. Max. length 285 ft., max. beam 50 ft., max. draft 23 ft., or Ostend-Bruges canal, max. length 312 ft., beam 57 ft., max. draft 21 ft. 16/5 to 16/10; max. 18 ft. 16/10 to 16/5.
FRESH WATER: Available quayside in docks. Rate delivery approx. 15 t.p.h.
FUEL: All grades.
DEVELOPMENTS: New deep water quay with max. depth 7.20 m. LLW, to be increased to 10 m. in the near future. Fresh water alongside.
GANGWAY/DECK WATCHMEN: Not necessary. If required, cost approx. 900 frs. per shift of 8 hrs.
OPENING/CLOSING HATCHES: Normally carried out by crew. Can be done by stevedores but will then be charged.
CERTIFICATES: Load line cert. Tonnage cert. Radar and radio certificates.
TOBACCO ALLOWANCE: 200 cigarettes or 100 cigarillos or 50 cigars or 250 gr. tobacco. Fresh supply weekly.
WINE AND SPIRIT ALLOWANCE: 1 litre per man in opened bottles.
CARGO GEAR: No additional requirements.
CONSULS:

Austria
Guatemala
Germany
Portugal
Norway
France
Finland
Chile
Great Britain
Monaco
Denmark
Uruguay
Sweden

REPAIRS: All types deck and engine repairs.
DRY DOCKS: In Fishing Port 2 slipways available, one 1,000 tons deadweight, the other 500 tons; one of approx. 3,000 tons is planned. One floating dry dock of 5,700 tons in Government repair docks.
REPATRIATION: Through immigration officers and Maritime Police, tel. 71941 and 76788.
AIRPORT: 3 miles from port, served by regular airlines.
TIME: Local time GMT plus 1 hour all year round.
HOLIDAYS: New Year (1 Jan.); Easter Monday (changeable); Labour Day (1 May); Ascension Day (changeable, in May); Whit Monday (changeable); Independence Day (21 July); Our Mary Ascension Day (15 Aug.); All Saints' Day (1 Nov.); Armistice Day (11 Nov.); Christmas Day (25 Dec.). Cargo work can be arranged on those days at sufficient notice.
POLICE/AMBULANCE/FIRE: Police tel. 71111 and 71057; Ambulance tel. 900; Fire tel. 71010 and 71086.
TELEPHONES: No arrangements for placing on board.
SERVICES: Compass adjusting, radio and radar repairs.
AUTHORITY: Harbour Master.

ZEEBRUGGE: 51.20 N. 03.12 E. (See Plan Book)

DOCUMENTS:
1 List of Dangerous Goods.
2 Crew Lists or Passenger Lists.
4 Cargo Manifests.
2 copies Bills of Lading.
3 Freight Lists prepared by Agents.
2 Customs Provision Lists prepared by Agents.
General Declaration prepared by Agents.
Customs Declaration, outward bound, prepared by Agents.
PILOTAGE: Compulsory except for small coasters. Pilot vessel located at A.1 buoy off Ostend and 14 miles N.W. of Zeebrugge. Black hull, white number forward on both sides of hull, yellow funnel with black top. Displays by day at top of mast, red square flag with letter "P" in white; by night, lights prescribed by international regulations. Pilot can be contacted by VHF, Channel 6, Morse or flag signal.
ANCHORAGE: In the vicinity of A.1 buoy pilot station, approx. position 51° 22′ N. 02° 53′ E. Depths up to 18 m.
RESTRICTIONS: Vessels with a draft of over 25 ft. are dependent on tide for entry.
MAX. SIZE: Length not limited. Max. draft up to 42 ft. depending on tide.
HEALTH: Pratique is normally given at pilot station provided health situation satisfactory. Any advice on health matters also obtainable from pilot service.
RADIO: Ostend Radio used for all messages. VHF Channel 9 used for Pilot. VHF Channel 8 used for tugs.
TUGS: Four permanent powerful tugs available. Normally join vessel at harbour entrance, ship's lines used.
BERTHING: Zeebrugge mole, for coal and other dry cargo, depth alongside 34 ft. low water.

Texaco Zeebrugge Marine Terminal: Two tanker berths, depth alongside 42 ft. low water. No slop disposal facilities.

Container Quay, depth alongside 43 ft. low water.
DENSITY: 1025.
FRESH WATER: Available from the berths, rate 30 t.p.h.
FUEL: All grades available. Can be supplied ex-wharf or by barge provided advance notice given.
STEVEDORES: 24 hours notice required to arrange gangs.
MEDICAL: Advance notice advisable for medical attention. Doctor and hospital facilities always available. Vaccinations can be arranged.
DEVELOPMENTS: Work commenced 1972 on new sea lock to handle ships up to 125,000 d.w.t. Work expected completed within 8 years. The lock will be 500 m. long, 57 m. wide and will have a max. depth of 18 m. LW.
GANGWAY/WATCHMEN: Advisable for gangway, 2 for moorings.
OPENING/CLOSING HATCHES: Normally by crew.
CERTIFICATES: Registry, tonnage and usual certificates.
CUSTOMS ALLOWANCES: Daily normal use.
CARGO GEAR: Normal requirements. Ten cranes 3 tons up to 16 tons.
IDENTIFICATION CARDS: Normal papers.
CONSULS: None.
REPAIRS: Repairs afloat by local workshop.
REPATRIATION: All facilities.
AIRPORTS: Ostend, Brussels, Antwerp.
TIME: GMT plus 1 hour. Summertime (1978: April 2nd to October 1st), GMT plus 2 hours.
HOLIDAYS: Work possible any day.
POLICE/AMBULANCE/FIRE: Telephone 900.
TELEPHONES: Only shore telephones.

AGENT: See "Antwerp".

Belize

BELIZE: 17.29 N. 88.11 W.

PORT LIMITS: Usually upon arrival at English Caye Pilot Station for vessels arriving from North and East and at anchorage in Belize Harbour for vessels arriving from South inside the reef.

DOCUMENTS:
- Crew Lists – 5 copies for local use plus 10 Spanish copies for Consular Clearance.
- Passenger Lists – 5 copies for local use plus 10 Spanish copies for Consular Clearance.
- Stores List – 3 copies for local use plus 10 Spanish copies for Consular Clearance.
- Manifests – 8 copies.
- Customs Documents – Clearance for last port and crew declaration.
- Health Documents – International Declaration of Health plus one copy crew vaccination list.
- Ship's Papers and Certificates should be available on request.

PILOTAGE: A Pilot is always on station at English Caye. They are kept informed of ships' movements by the respective Agents; for vessels with no appointed Agent, contact can sometimes be made with the Pilot station on 2182, failing this Belize Customs control keep a constant watch on 2750. Vessels consigned to Eurocaribe can make contact on 2182 HF or Channel 16 VHF. Various small boats are used by and are owned by individual Pilots.

ANCHORAGES: Depths in harbour anchorage area vary due to a natural slope; for example, a vessel drawing 14 ft. can anchor within 0.25 mile; 16 ft. 0.5 mile; 20 ft. 1 mile and so on Southward. Masters should refer to Pilot for this information.

RESTRICTIONS: The Pilots do not consider the Eastern Channel lights sufficiently efficient for night-time transit and it has therefore become established that no night arrivals and departures are made. Recently, however, large modern freighters have insisted on making night arrivals using radar with no apparent difficulty

MAX. SIZE: With no berths, size and length, within reason is not a problem. Tankers bringing oil to the Esso storage depot secure to buoys fore and aft. Max. draft 19 ft. 6 in.

PRATIQUE: Granted by Customs after boarding in harbour.

RADIO: Most ships' Agents man their own radio stations and usually stand-by on 2738 HF. Customs stand-by on 2750. Eurocaribe Belize stand-by on 2182 but in addition has frequencies 2045, 2190, 2400, 2638, 2670, 2738 and 2750 HF, and stand-by on Channel 16 VHF with alternative at Channels 6, 11, 12, 13 and 14.

TUGS: Tugs are not normally necessary but small ones are available.

STEVEDORES: Gangs usually require 2 hours notice during normal working hours. Work rates average between 3 and 10 tons per gang hour and cost: average between U.S. $4.00 and U.S. $7.00 per revenue ton depending on type of cargo.

MEDICAL: Hospital facilities are available. Smallpox vaccinations required.

TANKERS: Undersea pipe-line 8 in. in diameter.
Hand-pump discharging rate 250 to 300 g.p.m., also gravity flow. Normal discharge rate 2,000 barrels per hour.

DENSITY: Density varies with outflow from rivers during wet season (July-December).

FRESH WATER: Very scarce and expensive. Approx. 4 U.S. cents per gallon.

FUEL: Light diesel oil 45/48 available subject to Government Approval. Can be at buoys with 8 in. dia. pipe (reductions to 4 in. available or by barge).

FIRE PRECAUTIONS: None.

CONSULS:
- United States
- West Germany
- Guatemala
- Mexico
- Honduras
- Lebanon
- Nicaragua
- Holland
- France
- Belgium
- Norway
- Sweden
- Denmark
- El Salvador
- Panama

REPAIRS: Only small minor repairs possible.

SURVEYORS: Lloyds and A.B.S.

GANGWAY/DECK WATCHMEN: Not required.

HATCHES: Stevedores open and close hatches except McGregor type.

CUSTOMS ALLOWANCES: 200 cigarettes plus 1 bottle spirits (0.20).

CARGO GEAR: Ship's gear; no heavy lift cranes available.

REPATRIATION: Possible, regular air services to and from Miami, New Orleans, and neighbouring Republics.

AIRPORT: Belize International Airport 10 miles from Belize City.

TIME: Normally 6 hours behind GMT.

HOLIDAYS: Public Holidays: New Year's Day*; Baron Bliss Day (9th March); Good Friday; Holy Saturday; Easter Monday*; Columbus Day (12th October); Labour Day* (1st May); Commonwealth Day (24th May); National Day* (10th September); Carib Settlement Day (20th November); Christmas Day* (25th December); Boxing Day* (26th December).

*No work whatsoever, all other days subject to overtime rates.

POLICE/AMBULANCE/FIRE: All emergencies dial 90.

SHORE LEAVE: Possible.

IDENTIFICATION CARDS: Seaman's book sufficient.

REGULATIONS: None.

DELAYS: Discharge and loading operations occasionally delayed by weather (rain) and sometimes by shortage of equipment (barges, etc.).

DEVELOPMENTS: A new port is being constructed and could be in operation by end of 1978. Depth probably about 20 ft.

GENERAL: Starboard anchor usually used to make lee for operations on portside. It is necessary for vessels to provide toilet facilities for stevedores. Feeding of Supervisors and Customs Officials is normal.

AUTHORITY: Port Authority will operate after opening of new port.

AGENT: Eurocaribe S.S. Ltd. PO Box 281, 14 Fort St., Belize City, Belize, C.A. Tel. 2100. Cables "Unibranco Belize". Radio call sign: United Brands, Belize. Telex: 224 Belize.

NOTES

Please also advise Shipping Guides Ltd.

Benin, People's Republic of

COTONOU: 06.20 N. 02.32 E. (See Plan Book)

PORT LIMITS: The area contained within an arc of a circle of 1 mile radius centred on the red light at the West Jetty.

DOCUMENTS: (Also see "Shipmaster's Report".) Once berthed the ship must be able to produce to the port authorities:

6 copies Crew List.
4 copies List of Ports of Call.
6 copies Passenger List, and passengers in transit.
3 Customs Declarations (personal effects list).
2 Maritime Declarations of Health.
3 Lists Provisions and Stores, including foodstuffs.
10 copies Manifest.
1 Bill of Lading.
1 Declaration of Arms and Ammunition.
3 Lists of Dangerous Cargo (unloading or in transit).
Also international documents of ownership and safety.

PILOTAGE/APPROACHES: Vessels must advise ETA to Port Authority "Dirport Cotonou" 24 hours prior arrival weekdays, and before midday Saturday for Sundays and before midday on day preceding holidays. Cable address Pilot station "Commandant du Port, Cotonou". Telex: 5004 "Dirport Ctnou" On approach to port vessels may also call Pilot station on 2182 kc/s or VHF Channel 16. Permanent radio watch kept by port Coast-Guard Station. Pilot services permanent and operate night and day, Sundays and holidays, except for nights of 24th and 31st December from 1800–0600 hrs. Ships drawing more than 30 ft. must enter on high tide. On arrival in approaches, ships coming from West or South must steer a Northerly course in direction of lighthouse, and take Pilot about half a mile from fairway. If arriving from East, vessels should take Westerly course in direction of fairway and take Pilot about half a mile from fairway. Pilot boat is small cutter with black hull and white superstructure, by day carries flag "H" and by night carries statutory lights for pilot boats. Piloting obligatory for ships over 100 net tons.

ANCHORAGES: In cases of bad weather or of waiting for Pilot, ship must anchor approx. 1 mile to South of lighthouse. Sound anchorage with sand bottom and depth 14 m. Forbidden to anchor within radius of 700 m. from red light of West Jetty.

Prohibited Anchorage: All the area to the West of the meridian of the West breakwater red light.

RESTRICTIONS: No restrictions on hours of entry or exit.

MAX. SIZE: Length 230 m. and draft 31 ft.

HEALTH: Free Pratique generally given by Agent.

RADIO: Advisable give Agent 72 hours notice of ETA. Thereafter reconfirm 36 hours prior arrival.

RADAR/VHF: No port radar service. VHF Channel 16. R/T 2182 kc/s.

TUGS: Tug assistance performed by Port Authority of Cotonou and compulsory for every vessel over 500 g.r.t., mooring, unmooring, at berth or shifting. Extra charge for using tug's lines. Vessels with length over 135 m. require 2 tugs.

BERTHING: Berthing quay 620 m. long which will accept alongside a minimum of 4 ships working together. Harbour dredged up to 9 m. under zero of chart and will permit almost all sizes of ships to work safely. Railway line runs 4 m. side of quay, under ship tackles, and used only for heavy lifts. Berthing priority only given cargo ships and tankers which have specially reserved berths. Other ships berth dependent on berths available and in order of arrival. As well as two tanker berths there is loading berth for bulk palm-oil, one waiting berth at harbour entrance, and 4 quays with warehouses for import/export traffic.

STEVEDORES: Ship must advise Agent in advance of number stevedore teams required, and specify number of hours work required. This must be done 24 hours in advance on weekdays, and before midday Saturday for Sundays, and before midday on day preceding holidays. Loading and unloading rate: Working days – 600 tons for bagged cargo. 400 tons for other cargo. Sundays and holidays, half above rates. Days counted as 24 hours starting from first break following berthing. For ships having to handle smaller quantities, assessment of time calculated in multiples of 300 tons for bagged cargo and 200 tons for other cargo, per 12 hours. Loading and unloading operations can be carried out on Sundays and public holidays if Ship's Master wishes, with exception of Labour Day (May 1st), 26th October, 30th November, 31st December and Independence Day.

MEDICAL: Well-equipped modern hospital in Cotonou – smallpox vaccinations required.

TANKERS: 2 tanker quays for ships of 230 m. length and 31 ft. draft. Unloading carried out by 100 mm. pipe-line. Loading of petroleum products carried out by pumping (80 cu.m./h.) or by gravity (50 cu.m/h.). Products are aviation spirit 100/130, "Super" petrol, low-grade petrol, Kero Avtur, and gas oil.

FRESH WATER: Supplies available at all berths on quay by pipe-line of 100 mm. with reduction of 70 mm. (discharging 25 t.p.h.).

FUEL: Fuel oil of 1,500 seconds viscosity available at Berth No. 1 and at the Fishing Quay. Rate 50 to 80 cu.m./h.

FIRE PRECAUTIONS: Port has following safety equipment: 2 tugs equipped with fire hose of 50 cu.m./h. 2 motor pumps of 30 cu.m./h. 1 draining pump of 150 cu.m./h. In addition special security watches are kept on dangerous merchandise in classes 1a, 1b, 1c, 1d and 111c. Normal watch up to 5 tons, double watch from 5 tons to 16 tons. Motor pump standing by from 16–50 tons. Tug standing by for quantities above 40 tons for inflammable liquids (flashpoint less than 55° C) and above 50 tons for other dangerous cargo.

WATCHMEN: (See "Fire Precautions".) Recommended that a watchman be on board. Can be arranged by Agents.

OPENING/CLOSING HATCHES: Carried out by stevedores

CUSTOMS ALLOWANCES: 200 cigarettes and 3 opened bottles of spirits for each Crew member.

REPAIRS: Workshops for small repairs. No tank-cleaning facilities.

DRY DOCKS: Only hauling gear of 250 tons for careening small ships and trawlers.

CONSULS:

West German Embassy	31-2967
Chinese Popular Embassy	31-4424
U.S.A. Embassy	31-2650
French Embassy	31-2224
French Consulate	31-2638
Ghanaian Embassy	31-2746
Nigerian Embassy	31-3142
U.S.S.R. Embassy	31-2834
Niger Consulate	31-3334
Belgian Consulate	31-2486
Netherlands Consulate	31-3037
Consulate of Sweden and Norway	31-2433
Zaire Embassy	31–4983.

AIRPORT: 5 km. from port, served regularly by DC8 for European destinations (5 departures a week for Paris).

TIME: GMT plus 1 hour.

HOLIDAYS: January 1st; Easter Sunday 1st April; Labour Day (May 1st) – no cargo work; 26th October; 30th November; 31st December – no cargo work; Assumption; November 1st (All Saints' Day); 25th December (Christmas); Tabaski and Ramadan at the beginning of Lunar Year (Moslem holidays).

POLICE/AMBULANCE/FIRE: Harbour Police 31-3942; First Aid 17; Hospital 31-2713 and 31-2717; Fire Brigade 18.

TELEPHONES: A telephone can be placed on board at request of Ship's Master.

SHORE LEAVE: Crew must carry shore pass.

SHIPMASTER'S REPORT: October 1978.

Documents: Before a vessel can be registered certain items are needed by Agents, who can send pilot boat to collect from anchorage.

	Registration	*Port Health*	*Police*	*Agent*	*Customs*
Crew Lists	4	1	2	2	1
Passenger List	4	1	1	2	1
Ports of Call	4	1	1	1	1
Store List	2	–	–	–	1
Crew Declaration	2	–	–	–	1
Animal List	2	–	–	–	1
Arms & Ammunition	2	–	2	1	1
Vaccinations List	2	1	–	–	–
Cargo Plans	3	–	–	–	–
Hatch List	2	–	–	–	–
Cargo Manifests	15 (or as many as available for photo copy)				
Dangerous Cargo	3	–	–	–	–
Health Declaration	2	1	–	–	–

Registration: There does not appear to be a firm set of priorities but some cargo can be worked at most berths while others are restricted to a single berth. Two tankers can discharge or load at the South end of the East Mole which may also be used for containers.

Radio: Cotonou Radio was erratic and, on 2182, very poor via land line to the Agency office. VHF is available on 16, 14 and 12 with Port Control and some Agents have their own set or use that of a vessel alongside.

Consuls: There is no British representation in Benin. All requirements can be obtained by driving to Lagos to the High Commissioner.

Developments: A 40 tonne fork lift for containers etc. has been added to the cargo gear available but there are no cranes. It is planned to extend the Western end of the main quay by one berth and to fashion a container/Ro-Ro berth to the South of this at some future date.

Shore Leave: A Shore Pass (Visa de Passage) is required but single items are given to Senior Officers only, all others must share between 2 or 3 persons. It takes 24 hours to obtain a valid pass via Agent from Police.

AUTHORITY: Port Autonome de Cotonou.

Bermuda

HAMILTON, (incl. Freeport): 32.17 N. 64.47 W.

DOCUMENTS:
- Ship's Register.
- Derat. Certificate.
- Clearance previous Port.
- 4 Crew Lists.
- 4 Passenger Lists.
- 2 Provision Lists.
- 2 Crew Personal Effects Lists, i.e. cameras, binoculars, cigarettes, etc.
- 5 copies Cargo Manifest if discharging.

PILOTAGE: Pilot ordered by Agent on receipt of vessel's ETA (72, 48 and 24 hrs.). Pilot boards vessel approximately 2 miles East of Island with St. David's Lighthouse bearing 240° True. Boats black hull varnished superstructure.

If vessel's ETA alters, Bermuda Harbour Radio which in direct contact with Pilot station can be contacted by VHF Channels 10, 12, 16, 26. Pilotage is confined to daylight hours only with exception of vessels calling for medical aid – some of which handled off-shore.

ANCHORAGES: Grassy Bay and Great Sound. These anchorages are used mainly by passenger liners as they are close to Hamilton Harbour and are protected from heavy weather. Also used by large vessels carrying out extensive repairs.

RESTRICTIONS: Restricted by draft of 26 ft. Daylight piloting only.

MAX. SIZE: Largest ship to enter to date, length 690 ft., draft 26 ft.

HEALTH: Pratique granted on 24-hour basis and can be obtained by wireless by sending message via VRT to "Health Bermuda" requesting free pratique be granted. If any suspected disease or fever on board advise "Health" as well as Agent.

RADIO: Commercial radio station operated by Cable & Wireless Ltd., call letters VRT Bermuda. Bermuda Harbour Radio, controls channel traffic, call sign ZBM Bermuda.

VHF: Operated by Bermuda Harbour Radio. Contact on Channels 10, 12, 16, and 26.

TUGS: Tugs normally join vessel in harbour if requested. Tugs not compulsory and ordered depending on the size of the vessel and weather conditions. Tug's lines used during normal tug operations.

BERTHING: Docks and tugs are agreed upon between Agent and Pilot prior ship's arrival.

Berth	*Length of Berth*	*Max. Draft*	*Remarks*
No. 1	500 ft.	26 ft.	Port layout allows ships in excess of 500 ft. in length to be accommodated.
No. 5	100 ft.	26 ft.	Stubhead berth, used in conjunction with No. 6 berth for vessels to 600 ft. in length.
No. 6	320 ft.	26 ft.	A roll-on/roll-off facility is provided at this berth.
No. 7	713 ft.	26 ft.	No. 7/8 berths provide facilities for container operations.
No. 8	645 ft.	17 ft.	

Drafts are governed by depth of water in channel approaches to the Harbour.

STEVEDORES: Ordered by Agent after receipt of ETA. Average discharge general cargo 10 t.p.h.

MEDICAL: No advance notice required for medical attention if other than critical cases. First-class hospital facilities available. Vaccination certificates required for all seamen.

TANKERS: Shell bunkering Berth, Freeport, Ireland Island. Discharge lines 8 in. and 10 in. No slop discharge facilities.

DENSITY: 1025.

FRESH WATER: Delivered by barge. Order prior arrival to avoid delay.

FUEL: Grades available: Bunker "C" fuel oil, viscosity 100 SSF at 122° F. Diesel oil. Viscosity 3616 at 100° F.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Usually carried out by stevedores.

TOBACCO/WINE ALLOWANCE: Custom allows about one carton cigarettes and limited amount of spirits per man.

IDENTIFICATION CARDS: None required.

CONSULS:
- Belgium
- Chile
- Colombia
- Denmark
- France
- Germany (Federal Republic)
- Mexico
- Netherlands
- Norway
- Portugal
- Sweden
- United States

REPAIRS: All types minor deck and engine repairs can be carried out. Also major temporary repairs.

DRY DOCKS: Only yacht slipways available.

REPATRIATION: First-class facilities available for repatriation and crew changes.

AIRPORT: Distance from airport 10 miles. Connections to all parts of world. Average 15/20 flights per day.

TIME: Local time GMT minus 4. Permanent BST in 1974.

HOLIDAYS: New Year's Day; Good Friday; Commonwealth Day (May 24th); Queen's Birthday (celebrated annually in June); Cup Match (Thursday and Friday before first Monday in August); Remembrance Day (November 11th); Christmas Day, Boxing Day (December 26th).

POLICE/AMBULANCE/FIRE: Police 2-2222; Ambulance 2-2000; Fire 00.

TELEPHONES: Can be placed on board vessel when alongside.

GENERAL: Port of Freeport, Ireland Island, situated in the Port of Hamilton at the old British Dockyard is used mainly by the Royal Navy and Shell Bunkering.

SHIPMASTERS REPORT:

Approaches: Approach was made at night from Southward. Gibbs Hill Light sighted at 29 miles. First radar echo was made at 34 miles. St. David's Lt. Ho. Occ. 5 sec. can be easily confused with St. David's House Lt., Gp Fl 2 and they are hard to pick out against background lights. Mills Breaker and Kitchen Shoal Buoys are both good lights and are conspicuous on the radar. Lobster Pots marked by unlit buoys can be troublesome.

Pilotage: There are ten Pilots who operate on a rotation basis. Least depth is in the Dundonald Channel and Two Rocks Passage approaching Hamilton. Passenger Vessels over 26 ft. anchor in Grassy Bay just North of the Dundonald Channel. Official max. draft is 26 ft. although I was told by the Harbour Master that they will take ships up to 26 ft. 06 ins.

Berthing: Vessel berths starboard side to, swinging on anchor with tug assistance. During a long stay vessels often have to shift up and down the wharf to make room for other ships making short calls. At one time the bow was overhanging the end of the quay by 100 ft. but even in this position ship can be well secured.

Cargo Operations: Labour force consists of around 40 men which can just make up two freezer gangs. When a container ship arrives she takes priority and one gang is lost. At weekends a few additional men are available from other jobs within the stevedoring firm and a third general gang can be made up. Stevedore stressed that cargo be restricted to two hatches when possible especially in ships with beams and hatches. Locker stow should be avoided when possible. Average on freezer was approximately 9 t.p.h.

Hours of work are:— 0800-1200, 1300-1700, 1800-2100. This applies every day except Saturday when work finishes at 1700 hrs. General cargo gangs can be worked until 2200 hrs. but all freezer gangs finish at 2100 hrs. to allow time for Receivers to clear the wharf of cargo by 2200 hrs.

Fresh Water: Not readily available in large quantities due to a water shortage. Price when available is 6 dollars a ton. We managed without buying any in spite of a prolonged stay.

Currency: Stated in Pilots book to be pounds. It is in fact Bermuda Dollars which are equivalent to American dollars and readily interchangeable.

Stores: Very expensive and would suggest only plan on buying essentials from supermarket in small quantities.

Discharge Averages:

No. 1 Palletised Milk Powder	20 t.p.h.
No. 2 Cartons of Apples (Locker)	6.2
No. 3 UTD Centre Meat & Butter	10.8
No. 3 MTD Centre Meat	8.8
No. 4 UTD Centre Meat & Butter	8.0
No. 4 UTD P Meat	11.0
No. 4 UTD S Cartons Cheese	7.6
No. 5 UTD Carton Meat (Full Deck)	8.5

AUTHORITY: Harbour Master, Marine and Port Services Dept.

AGENT: Meyer Agencies Ltd., PO Box 510, Hamilton 5, Bermuda. Tel. 55214, 54176.

Shipping, Insurance, Travel Agents. Marine repairs, tug and barge operators, stevedoring operators.

ST. GEORGE'S, 32.22 N. 64.41 W.

DOCUMENTS:
- Ship's Register.
- Derat. Certificate.
- Clearance previous Port.
- 4 Crew Lists.
- 4 Passenger Lists.
- 2 Provision Lists.
- 2 Crew Personal Effects Lists, i.e. cameras, binoculars, cigarettes, etc.
- 5 copies Cargo Manifest if discharging.

PILOTAGE: Pilot ordered by Agent on receipt of vessel's ETA. Pilot boards vessel approximately 2 miles East of Island with St. David's Lighthouse bearing 240° True. Boats black hull, varnished superstructure. If vessel's ETA alters, Bermuda Harbour Radio which in direct contact with Pilot station can be contacted by VHF Channels 10, 12, 16, 26. Pilotage day only. Except medical cases which are handled offshore.

ANCHORAGES: *(a)* Five Fathom Hole, located at Eastern end of Island and is point where Pilots embark/disembark. Used by vessels not required to enter or those awaiting daylight. *(b)* Murray's Anchorage, used instead of Five Fathom Hole during times of heavy weather (daylight hours only). Also, by vessels unable enter St. George's Harbour and wishing to take on water, carry out repairs, etc. A stand-by anchorage for vessels waiting berth at Esso Oil bunkering pier and for vessels leaving this pier and awaiting daylight. *(c)* St. George's Harbour, when weather conditions such that Five Fathom Hole and Murray's Anchorage unsuitable to land ill/injured persons vessel proceeds directly to St. George's Harbour and anchors.

RESTRICTIONS: Entry to St. George's Harbour restricted by draft of 30 ft. Murray's Anchorage restricted by draft of 38 ft.

MAX. SIZE: Largest ship to enter to date – length 628 ft. However, size controlled by max. draft of 30 ft., displacement and weather conditions.

HEALTH: Pratique granted on 24 hour basis and can be obtained by wireless by sending message via VRT to "Health Bermuda" requesting free pratique be granted. If any suspected disease or fever on board advise Health as well as Agent.

RADIO: Commercial radio station operated by Cable & Wireless Limited, call letters VRT Bermuda. Bermuda Harbour Radio controls Channel traffic, call sign ZBM Bermuda.

VHF: Operated by Bermuda Harbour Radio. Contact on Channels 10, 12, 16, and 26.

TUGS: Tugs normally join vessel in harbour if requested. Tugs not compulsory and ordered depending on the size of the vessel and weather conditions. Tug's lines used during normal tug operations.

BERTHING: Dock and tugs agreed upon between Agent and Pilot prior ship's arrival.

STEVEDORES: Ordered by Agent after receipt of ETA. Average discharge general cargo 10 t.p.h.

MEDICAL: No advance notice required for medical attention if other than critical cases. First-class hospital facilities available. Vaccination certificates required for all seamen.

TANKERS: Esso Oil Pier: Discharge lines 8 in. and 10 in. No slop discharge facilities.

DENSITY: 1025.

FRESH WATER: Delivered by barge. Order prior arrival to avoid delay.

FUEL: Grades available: Bunker "C" fuel oil, viscosity 122 SSF at 122° F. Diesel oil, viscosity 3616 at 100° F.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Usually carried out by the stevedores.

TOBACCO/WINE ALLOWANCE: Customs allow about one carton cigarettes and limited amount spirits per man.

IDENTIFICATION CARDS: None required.

CONSULS:

- Belgium
- Chile
- Colombia
- France
- Germany (Federal Republic)
- Mexico
- Denmark
- Netherlands
- Norway
- Portugal
- Sweden
- United States

REPAIRS: All types minor deck and engine repairs can be carried out. Also major temporary repairs.

DRY DOCKS: Only yacht slipways available.

REPATRIATION: First-class facilities available for repatriation and crew changes.

AIRPORT: Distance from airport 2 miles. Connections to all parts of world. Average of 15/20 flights per day.

TIME: Local time GMT minus 4. Permanent BST in 1974.

HOLIDAYS: New Year's Day; Good Friday; Commonwealth Day (May 24th); Queen's Birthday (celebrated annually in June); Cup Match (Thursday and Friday before first Monday in August); Remembrance Day (November 11th); Christmas Day; Boxing Day (December 26th).

POLICE/AMBULANCE/FIRE: Police 5–0011; Ambulance 2–200; Fire "00".

TELEPHONES: Can be placed on board vessels when alongside.

GENERAL: Esso Oil Berth, within Port of St. George, is purely a bunkering and petroleum discharge pier situated on the Southern side of Murray's Anchorage.

AUTHORITY: Harbour Master.

AGENT: Meyer Agencies Ltd., PO Box 48, St. George's 1, Bermuda. Tel. 7-1255 (6 lines). Telex 3361 Meyer BA.

Shipping, Insurance, Travel Agents. Marine repairs, tug and barge operators, stevedoring operators.

NOTES

Please also advise Shipping Guides Ltd.

Bolivia

NOTES

Please also advise Shipping Guides Ltd.

GENERAL: Bolivia is completely land locked with no ocean ports.

The country has special port facilities or 'in transit zones' in Brazil at Belem and Santos; in Argentina at Rosario; and to the Pacific at Matarani, (and shortly Ilo) in Peru also Arica and Antofagusta in Chile.

In 1975 Chile offered a corridor 5 to 7 miles wide at the Pacific to Bolivia, and negotiations are at present being conducted on this subject. Whether this zone will include the port Arica is not yet known.

(1) A newly installed in-transit zone at Rosario (Argentina) is expected to divert present Bolivian imports and exports from Buenos Aires. The new area covers sheds 23/30, an area of over 5 hectares, and 945 m. of wharf. The present free zone, in the centre of the port zone, will eventually become the Northern sector of the port, with good railway connections to Bolivia. All Government Cargo is handled by the Bolivian Customs Office from Ocean Port, but all private cargo is looked after by forwarding agents on behalf of importers, whose job it is to arrange for despatch, pay port handling charges, rail freight, etc.

(2) There are also special port facilities at Matarani and Ilo in Peru, and a new road is being built which will bring La Paz to within one days road travel from the sea.

(3) The country borders to the East with the Paraguay River on a brief stretch near Corumba, on the Caceres Lagoon by Puerto Suarez, and where a new port – Sucre is to be opened shortly in connection with the movement of Iron Ore and Manganese down river. The river will normally permit vessels up to 11 or 12 ft. draft, occasionally falling to 5 to 6 ft. in the dry season (October/November).

DOCUMENTS: In each port there are Bolivian Customs Authorities under the control of the Bolivian Consul. At none of the 'in-transit ports' are any special Consular despatches or documents needed by vessels, other than those required by the particular country. It is only necessary to present separate manifests for cargo in transit to Bolivia.

However commercial invoices, and goods documentation does require consular intervention.

Shippers must vise Bills of Lading and Consular Invoices and also attach suppliers invoices, certificates of origin and insurance policy. Most imports are handled under letters of credit. Documents must be made out in Spanish. At Ocean Port, forwarding Agents replace the Bill of Lading with a railway bill or trucking bill. There is no exchange control or shortage of foreign exchange in Bolivia.

Claims are finally set up (shortages, condition, etc.) in Bolivia, and hook tallies, local port receipt to Bolivian customs, railway or truck receipts, etc.. all form part of the settlement.

CONTAINERS: It is possible to despatch sealed containers right through to Customs in Bolivia for opening there.

WEIGHTS AND MEASURES: All weights and measures are to be expressed in the metric system, except for lumber, in board feet.

FLAG: Three equal horizontal stripes of red, yellow and green.

Brazil

GENERAL: All ports

DOCUMENTS:

The following documents are the maximum number required on arrival, including copies for agents.

	Required by			
	Port Doctor	Customs	Police	Totals
Crew List	3	3	4	10/12
Crew Personal effects list		3		1/3
Stores (engine/deck /cabin/bonded)		4		1/4
Passengers landing in transit or negative	3	6	3	12
Manifest for port (or negative)			3 (arms munitions only)	6/9
Manifest in transit (every port)				
Vaccination certificates (one each person)	1			1
Maritime Health Cert. (WHO form)	2			2
Deratization Cert. or exemption	1			1
Accompanied baggage, individual		3		3
Unaccompanied baggage manifest		3		3
General statement	2	2	4	4

The clearance from the previous Brazilian port of call must also be presented, and a detail of discrepancies in cargo (lost overboard, etc.) be available.

All the usual ship's paper's must be at hand:— Registration, Tonnage, Radio Certificate, Safety Certificate, etc. The due dates of all these certificates are specified in the arrival statement, to be signed by the Master.

Consular dues are now collected in Brazil, therefore no Consular intervention is required on ship's papers.

Care must be taken that ports as manifested check against the arrival certificate, and also that the list of ports coincide with those declared on the health certificate. Manifests must show:—

(1) Flag and name of vessel
(2) Detailed description of goods, including freights in U.S. Dollars
(3) Owners and Charterers name
(4) Date of entry and sailing must be shown on the first page.

FLAG: The Brazilian flag is a green ground with a yellow lozenge enclosing a blue sphere, with 21 white stars of which 5 form the Southern Cross and the motto 'Ordern & Progresso'.

This must be flown from the foremast when in Brazilian Ports, from 0800 hrs. to sunset daily.

The customs flag – blue with a white star – to be flown 24 hours a day after clearance is granted.

FREE PRATIQUE: Vessels must report ETA via Agent 24 hours in advance, confirming 12 hours prior to arrival. The message must report that sanitary conditions are satisfactory or otherwise and an indication of the number of passengers intending to disembark and/or in transit.

On arrival the Port Health Authority will board, and further to the documents previously mentioned will require to sight vaccination certificates.

The reception committee will only board by accommodation ladder, or gangway if the vessel is alongside, and must be met at the head of the ladder by a Ship's Officer.

PILOTAGE: This is compulsory for all vessels over 200 g.r.t. There are specific boarding points shown on the charts for each port and vessels must wait there, flying flag G, either at anchor or under way. A safe rope ladder must be provided and must be properly illuminated. Pilots should be ordered at least 2 hours prior to arrival by ship's Agent, or in the event of outlying ports 24 or 48 hours ahead. (See each port).

STEVEDORES: Longshoremen are provided by the dock companies and paid for from the Port Charges. Stevedoring can be carried out either by ship's Agents or by contract. In all cases the number of men per gang and their salaries are fixed by Sunamen (Merchant Shipping Superintendancy in the Ministry of Transport).

The vessel is legally the employer of the labour, and as a result the vessel is responsible for any damage to the cargo, ship or any third party, by the stevedores.

GENERAL BERTHING INFORMATION:

A berthing priority in Brazilian Ports is given as follows:–

(1) Warships, Brazilian or Foreign.
(2) Regular Passenger Liners for whom immediate berthing facilities are available. if requested at least 24 hours in advance.
(3) Cargo vessels, for whom there are special installations, are given preferential berthing rights.
(4) Vessels with perishable cargoes are given priority berthing.
(5) Vessels that can load and discharge simultaneously can obtain preference over others.

As soon as cargo operations finish, all vessels must leave their berth, or be removed by the Port Authority.

FUEL: A monopoly on supply is held by PETROBRAS, and owners requirements must be made well in advance to the Petrobras offices in New York, London or Rio de Janeiro. Supplies are not plentiful, and in certain ports only certain grades are available.

POLLUTION: Very strict penalties are enforced, and fines are the same, however little pollution is caused. No dumping of any oil is permitted within 50 miles of the coast.

Garbage: It is forbidden to dump any garbage in any harbour or river. In some ports garbage collection can be arranged.

CREW: Crew members wishing to join a vessel, must carry a letter of instruction for the ship's Agent. They must be signed on within 48 hours of arrival.

For Crew members joining from abroad it is advisable to be in possession of a two year multiple entry visa, as only U.S. consulates in Rio de Janeiro, Recife and Brasilia are authorised to issue visas.

Seamen's Missions:

Scandinavian Seaman's Mission
Flying Angel Club
German Seaman's Home

The above Missions are in Santos, and can arrange football matches, tours, etc. There are no Missions in other ports.

GENERAL: Operators and Masters of Liberian flag vessels should consult Agents well in advance respecting requirements for endorsement of seamen's books or passports.

Shipmaster's Report: Identification Cards.

The Regulations specified in the Identification Card Sections may still be in force, but they do not appear to be operated. Identification cards were not required by ship's personnel during our visit to Brazil.

ANGRA DOS REIS: 23.01 S. 44.19 W.

DOCUMENTS: See "General" before first port.

PILOTAGE: When requested by the Agents, a pilot launch meets incoming ships off the automatic lighthouses of Itacuatiba and the Lage Branca, depending on whether the ships approach from the East or West, respectively. Pilotage compulsory, 2 hours notice required. State ETA and position Pilot will be embarked.

ANCHORAGES: In the Bay of Ilha Grande; approximately midway between the ports of Rio de Janeiro and Santos; offering excellent anchorages, amongst which may be mentioned: Enseada das Estrelas, Enseada do Abraao, Enseada das Palmas, Enseada Sitio Forte, and Enseada de Aracatiba.

The inspection area of the port health, federal receipt and maritime police authorities is covered by a radius of 300 m. around the point of co-ordinates 23° 00′ 42″ S., 44° 18′ 41″ W.

Anchorage for vessels of more than 31 ft. draft and 10,000 g.r.t. 23° 01′ 54″ S., 44° 19′ 18″ W.

Anchorages for vessels of less than 31 ft. or 10,000 g.r.t. 23° 00′ 48″ S., 44° 18′ 30″ W.

Anchoring prohibited in the approach channel and manoeuvring basin.

RESTRICTIONS: The Bay of Ilha Grande possesses two entrances, from the East and the West, permitting immediate access to the Port of Angra dos Reis from the direction of Rio de Janeiro or the Port of Santos, without any change of course. Both access Channels are adequately marked, enabling ships of up to 14 m. draft to navigate in complete safety as far as the port basin about 1 mile from the wharf, where they may lie at anchor and take on cargo from tenders tied up alongside There is another basin with a mud bottom even nearer the wharf, permitting anchorage and docking manoeuvres for ships of up to 10 m. draft.

HEALTH: Port doctor visits all ships on arrival and requires Maritime Declaration of Health, Deratisation Certificate, 2 Crew Lists. Vessels from another Brazilian port automatically receive free pratique and should not fly Quarantine Flag. If suspected disease or fever on board it is advisable to cable Agent before arrival.

TUGS: Available: 4 tugs of up to 600 h.p.

BERTHING: A wharf 1,300 ft. in length, with 1,050 ft. available for tying-up. The wharf is being extended 600 ft. and will be dredged the entire length of the quay so as to receive ships of up to 10 m. draft.

CARGO FACILITIES: Two grain suckers each with capacity of 60 t.p.h. Two electric cranes of 6–6.2 tons capacity, one crane of 3.2 tons capacity and three electric cranes of 1.5 tons capacity. Mobile cranes, 1 for 8 tons, 1 for 9 tons, 1 for 45 tons and 1 for 61 tons. Verolme have an 80-ton floating crane available for hire.

Also available for hire are 2 mechanical conveyors, each with 80 t.p.h. capacity.

MEDICAL: All facilities available. If doctor needed on arrival or making emergency call to land sick persons, cable ETA 12 hours before arrival.

FRESH WATER: Available. Vessels can be provided with up to 50 tons. Connection is 4 in. Pressure greater at night.

FUEL: No facilities for supplying large vessels. Small vessels can be supplied with diesel oil.

REPAIRS: Various mechanical workshops for the execution of shipboard repairs, equipped with lathes, presses, planes, electric and acetylene welding, drills, power-saws and grindstones, etc. The big shipyards of Verolme are situated in the Bay of Jacuecanga, near the port of Angra.

CUSTOMS ALLOWANCES: For each crew member, 2 cartons of cigarettes and 1 bottle wine or spirits.

WATCHMEN: Gangway watchmen strongly recommended for any vessels working cargo with shore labour on board. Watchmen from shore not necessary for coal, iron ore and oil cargoes.

CONSULS: There are no Consuls in this port. They are situated in Rio de Janeiro.

TIME: The local time is GMT minus 3 hours.

HOLIDAYS: 1st January; 1st May; 29th June; 7th September; 8th

December; 25th December; 31st December, also local holidays January 6th, April 3rd and December 8th.

TELEPHONES: Not available.

DEVELOPMENTS: Oil terminal for of 400,000 tons under construction.

AUTHORITY: Capitania dos Portos em Angra dos Reis.

ARATU: 12.46 S. 38.30 W.

LOCATION: Located at Joao Pereira Point, in front of the Island of Mare in the Eastern part of the Bay of Todos os Santos.

DOCUMENTS: See "General" before first port and "Salvador".

PILOTAGE: Compulsory. Requests for Pilots are to be made to the Bay of Todos os Santos Pilots' Association at Serra da Raiz Building, 5th Floor, Room 510 – Rua da Grecia 8, tel. 242–2221 or by Channel 16 VHF-FM of the coastal radiotelephone network.

Requests must be made 2 hours in advance, specifying the time of the vessel's entry.

APPROACHES: *Access Channel:* The access channel starts at Lat. 12° 58′ S. and Long. 38° 31′ 55″ W. with a minimum depth of 18 m. (see Chart 1108 of the NHD). The channel is marked by 8 light buoys, 4 to starboard with red lights and 4 to port with white lights and by the lighthouse at Areia Point. To the North of the port of Aratu is the lighthouse of Cabrito Point which provides a good landmark day and night for vessels bound for the port of Aratu. The length of the channel is about 2 miles as far as the manoeuvring area, with a minimum width of 200 yards.

The improvement of the nautical signalling arrangement in the access channel to the port is planned, based on a study carried out by a Dutch firm and under an agreement which will be signed with the SSN. The following points are fairly clear and serve for direction finding purposes:

(a) Furnaces of the Salvador Cement Company, at Sacopa Point, during the day;
(b) USIBA terminal which has a red light at its top, serving as a reference point both day and night.
(c) Construction at the top of the hill at Toque-Toque Point, during the day.
(d) Church of Nossa Senhora das Neves on the Southern part of the island of Mare during the day;
(e) The lighthouses of Areia Point and Cabeto Point, both day and night.

Existing Dangers: The shoal to the West of Sacopa Point and the banks of the Island of Mare are being permanently dredged.

Manoeuvring Area: The area intended for berthing and unberthing of vessels is defined to the East and West by the 10 m. line, with variable width from 400 to 1,000 m., limited to the South by the 12° 46′ 09″ S. parallel.

ANCHORAGE: The Monte Serrat anchorage must be used for waiting and inspection. Anchorage of vessels is prohibited in the manoeuvring area and the access channel.

MAX. SIZE: See "Berthing".

TUGS: Salvador tugs used.

BERTHING: Berthing may be effected on both sides of the pier. The North berth is used by vessels discharging and the South berth by vessels loading.

The South part of the pier has a depth for vessels up to 12 m. draft and possibility for accommodating vessels up to 280 m. length. The North part is limited to vessels up to 10 m. draft, and is 155 m. long. The above quoted depths refer to the reduction level of NHD soundings.

When berthing the anchor must be used.

There are 10 securing points on the pier. On the South berth there are 10 points 23 m. apart. There are two other points on the two dolphins, one at the end of the pier and on the inside part of the pier, on the extension of the South quay.

Cranes: A solid bulk material unloading crane with 25 ton capacity removes cargo by means of a scoop, and places it on a transporting conveyor.

Stackers: In the storage area a mineral stacker is being installed.

Transporting Conveyor: Type PHB (Pohlig-Heckel do Brasil S/A) with a length of 1,875 m., 1,289 m. being for minerals, 449 m. for powdered mineral and 586 m. for sand. Loading capacity: 1,200 t.p.h.; unloading capacity 2,400 t.p.h. This conveyor will take solid mineral to the storage area or to the silo itself in the case of aluminium cargo. It can only be operated for loading or unloading one vessel at a time to or from the storage area. In the event that one of the products to be loaded or unloaded is sand or aluminium, two vessels can be operated simultaneously, one loading and one unloading.

REPAIRS: There is a workshop under construction.

DRY DOCK: There is a naval dry dock in Aratu capable of handling vessels up to 45,000 d.w.t. It has dimensions 230 m. by 30 m. wide. Depth 11.5 m. However, the access channel will only allow vessels of up to 10 m. draft, though this is expected to be increased shortly.

FUEL: Available by road tanker from Salvador. Also see "General" before first port.

FRESH WATER: No supply on the quay.

AIRPORT: Internal flights within Brazil available.

CONSULS: See "Salvador".

HOLIDAYS: *Local Holidays:* 24th June, 2nd July and 8th December.

GENERAL: The port is not yet in commercial operation.

AUTHORITY: See "Salvador".

BELEM: 01.25 S. 48.25 W. (See Plan Book)

PORT LIMITS: Subject to Charter Party Terms, vessel normally considered an "arrived ship" when at Val-de-Caes anchorage, Icoaraci anchorage, or alongside the quay.

DOCUMENTS: See "General" before first port.

PILOTAGE: Pilot usually ordered through vessel's Belem Agent, ETA at least 72 hours in advance and confirming not less than 24 hours prior to arrival. Vessels can apply direct to Pilot station (on condition that local radio station is operating). Telegraphic address "Praticagem – Salinopolis", and call sign of Salinopolis (or Salinas) radio station is PPL. Pilot boards at a point 7 miles North of Salinas lighthouse; a red motor-launch is used. Launch carries a red flag with a black P; it also has a black P painted on each side and on cabin roof. If pilot boat not in position on arrival of vessel, position 7 miles North of the light is a safe anchorage. Masters who do not know area should approach Salinas with caution.

ANCHORAGE: Vessels with a draft greater than 26 ft. anchor off Icoaraci, 7 miles from the port where they work cargo.

Vessels that are impounded anchor off Val-de-Caes.

Vessels undergoing repairs anchor off the Naval base dock at Val-de-Caes.

Vessels with a draft of less than 26 ft. anchor at Val-de-Caes. Coordinates: 01° 24′ 01″ S., 48° 30′ W., 01° 21′ 03″ S., 48° 29′ 03″ W. and 01° 08′ 09″ S., 48° 28′ 03″ W.

Between Icoaraci and Val-de-Caes, there is a shallow spot at Tapana, which ships should approach with caution, although bottom is soft mud and sand.

HEALTH: Maritime Police, Customs and Port Health board vessel on arrival at whichever anchorage is used, or alongside. Pratique granted on the presentation of documents. If port *not* first Brazilian port of call. Port Health Authorities not required, although Police and Customs will still board. After first Brazilian port, Port Health only required in cases of illness or death. The use of quarantine "Q" flag not necessary. Also see "General" before first port.

RADIO: No VHF facilities in the area. Suggested that ship contacts Belem Agent through Barbados Radio, and this is also usual way that vessels are contacted by Belem. An alternative to Barbados Radio is the United States radio station at Chatham, Virginia.

TUGS: One tug, "Rio Acara", 700 h.p.

BERTHING: The quays are of cement and sand construction on a base of stones, which is, in turn, on a bed of hard clay. The quay height is a max. of +4.50 m. to accommodate the max. tidal rise of up to +3.20 m.

Soundings taken in 1973, for vessels alongside in relation to the hydrographic zero of the port are as follows:

Length of quay (m.)	*Draft (m.)*	*Location*
75	2.5	S. face and N. face of Marechal Hermes Dock
300	3.5 to 4.5	Quay wall – Mosqueiro & Soure Shed and Warehouses 1 and 2.
342	4 to 5	Quay wall – Warehouse 3, Maua Square and Warehouse 4.
385	4.6 to 5.4	Quay wall – Warehouses 5, 6 and 7.
100	7	Quay wall – Warehouse 8
261	8	Quay wall – Warehouses 11 and 12.
110	8	Quay wall – Ocrim Silo to the end of the Wall.

Quay equipment: 26 electric cranes, 11 cranes on pneumatic tyres, 2 steam cranes, ranging from 2.5 to 25 tons capacity. 2 floating cranes are also available of 100 tons and 20 tons capacity. There are facilities for handling containers.

CARGO FACILITIES: 3 regular silos for grain, with a capacity of some 11,500 cu.m. 2 irregular silos with a capacity of 1,430 cu.m. Average hourly discharge rate 102 tons.

For grain suction there is one fixed tower, 42 ton capacity, and one portable tower of 60 tons. Being installed is a mobile suction tower with a capacity of 100 t.p.h.

A 65 m. transporter/track/belt with capacity of 200 t.p.h., one bucket transporter with a capacity of 200 t.p.h., and one weighing tower with a capacity of 200 t.p.h.

TANKERS: At oil terminal of Miramar (Val-de-Caes), vessels of the Shell "H" class (18,000 tons d.w.) may berth or unberth at any state of the tide, subject to draft. Max. depth alongside berth at low water 26 ft., the same as that of approach channel. Mooring at this berth is to buoys inside the line of the "T" jetty.

STEVEDORES: Stevedoring gangs for day shifts 0630 and 1230 hrs. and 1630 hrs. for night shift. Loading and discharging rates exceptionally good, particularly if vessel working at anchorages into lighters. Any delays to vessels alongside can usually be put down to the lack of official clearances in case of loading export cargo.

MEDICAL: Notice of required medical assistance should always be given in advance. There are a number of first-aid posts for minor complaints. Vaccination Certificates for smallpox are essential, and, although not required officially, yellow fever vaccinations recommended.

DENSITY: Strong outflow of Amazon and its tributaries is such that water at Salinas is only semi-salt. In the river itself, the water becomes slightly brackish, and half way to Belem, is absolutely fresh.

FRESH WATER; Fresh water only obtainable alongside main quay, and not at oil berth. Delivery rate 25 t.p.h. Boiler water may be taken direct from the river at a point named Capim, near the entrance to Marajo Bay.

FUEL: See "General" before first port. Available, but due to Brazilian Custom's laws, as much advance notice as possible should be given in order to obtain correct documentation. A minimum of one weeks' notice recommended.

GANGWAY/DECK WATCHMEN: The employment of gangway watchmen recommended.

HATCHES: Hatches normally opened and closed by stevedores, but if it is raining they are inclined to shelter before closing.

CUSTOMS ALLOWANCES: Custom's Authorities do not normally search ship's crews, and reasonable quantity can remain in the possession of crew members. However, no attempt should be made to take more than a reasonable amount ashore.

IDENTITY CARDS: Foreign crew members not permitted to go ashore without presentation of identity card on which is a photograph of holder and personal details. These cards are provided by the Agent upon arrival. The identity card must be delivered on disembarkation to the Federal Police who will return it to the crew member on re-embarkation.

CONSULS:

- Belgium
- Bolivia
- Colombia
- Costa Rica
- Denmark
- Dominican Republic
- France
- Great Britain
- Holland
- Italy
- Japan
- Mexico
- Norway
- Peru
- Portugal
- Spain
- Sweden
- United States
- Uruguay
- Venezuela

REPAIRS: Deck and engine repairs of all types can be carried out by the Brazilian Naval Dockyard, or by repair shops of the Companhia Docas do Para.

DRY DOCKS: At Naval Base, there is a dry dock measuring 730 ft. by 74 ft. with a depth over the sill of 25 ft. There are also several small floating docks, but they are not adequate for sea-going vessels.

REPATRIATION: There are three international flights each week from Belem. Miami 1 flight per week, Wednesday. New York 2 flights per week, Monday, Friday. In additon, daily flights to Rio de Janeiro. Airport of Val-de-Caes is about 4 miles from the city centre.

TIME: Local time GMT minus 3 hours. Summertime (1 Dec.–28 Feb.) GMT minus 2 hours.

HOLIDAYS: New Year's Day (1st January); Carnival (variable); Labour Day (1st May); Corpus Christi (25th May); Independence Day (7th September); All Souls' Day (2nd November); Proclamation of the Republic (15th November); Christmas Day (25th December). Work could be carried out on these days, but costs would be prohibitive.

POLICE/AMBULANCE/FIRE: Maritime Police 234996; Ambulance 222523; Fire Brigade 23–3119.

TELEPHONES: Telephones can be put on board vessels alongside main quay, but this facility is seldom used.

GENERAL: Tidal action in the Guajara Bay is extensive, with the "Pororoca" phenomenon which comprises the meeting of tidal water with masses of fresh water coming from the Brazilian Equatorial rivers. The tidal wave takes 3 hours 40 minutes to come from the Salinas lighthouse to the South end of the port of Belem, the port establishment being 11 hours 35 minutes. Systematic measurements at times of spring tides show that the average height of water reaches 3.22 m. at high tide and in the quadratures 2.42 m.

During the ebb, the waters coming up the bay of Guajara are predominantly picked up by the Western channel current, with great speed, thus explaining the great depths at that point, and also in the Western channel the average ebb and flow speeds are 1.30 and 1.74 m. per second, respectively, and in the East channel they are respectively 1.19 and 2.10 m. per second.

AUTHORITY: Companhia Docas do Para.

CABEDELO: 06.58 S. 34.50 W.

DOCUMENTS: See "General" before first port.

PILOTAGE: Contact Pilot's Headquarters by radio via vessel's Agent located at Joao-Pessoa (24 km. from Cabedelo). As no radio station available at Joao-Pessoa or Cabedelo such messages are usually relayed by Olinda Radio PPA – Fortaleza Radio PPC – Amaralina Radio PPA – or Rio Radio PPR. All messages are delivered by National Telegraph – Telegrafo Nacional. Pilots maintain day and night watch from Cabedelo beach. Pilots' launches painted red with capital "P". Vessels await Pilot 0.75 miles E.N.E. of Piedra Seca Lt.

ANCHORAGE: The inspection area of the Port Health, Federal Receipt and Maritime Police authorities is that covered by a radius of 185 m. around the point of co-ordinates Lat. 06° 58′ S. and Long. 34° 58′ W.

Anchorage for vessels of more than 10,000 g.r.t. – inner maritime area limited by the circle 185 m. distant around the point of co-ordinates: Lat. 06° 58′ S. and Long. 034° 58′ 08″ W.

Vessels impounded or requiring considerable repairs – vessels of more than 5,000 g.r.t. at the point of co-ordinates: Lat. 06° 58′ 10″ S., Long. 34° 51′ W., in a circle distance 1 mile aroundthis point. Vessels of less than 5,000 g.r.t. in a circle distance 0.5 mile around the point of co-ordinates: Lat. 06° 58′ 48″ S., Long. 34° 50′ 18″ W.

RESTRICTIONS: For Masters calling at Cabedelo for first time it is preferable not to enter during darkness.

MAX. SIZE: Max. length 200 m., draft spring tide 23 ft., neap tide 21 ft.

HEALTH: Also see "General" before first port. If Master suspects contagious disease aboard he must report to Agent who will contact Brazilian Health Authorities at Joao-Pessoa.

TUGS: None available.

BERTHING: Safe drafts at bar entering or sailing: spring tide 23 ft., neap tide 21 ft. Berthing takes place in accordance with vessel's draft. Master must always give Agent vessel's draft arriving off Cabedelo. Length of quay, 600 m. depth alongside 5–10 m.

STEVEDORES: Advise Agent ETA at Cabedelo 48 hours prior to arrival to make arrangements with dock and stevedores for discharging or loading.

CRANES: 3 Portal cranes, 2×3 tons, 1×6 tons and 5 cranes of 1.5 tons capacity.

MEDICAL: For urgent cases recommended that vessel call at Recife instead of Cabedelo as Recife has better facilities. If vessel must enter patient will be removed to Joao-Pessoa Hospital as no hospital available at Cabedelo.

TANKERS: Cabedelo not a loading port for petroleum products. Messrs. Esso-Brasileira de Petroleo, have tanks for reception of gasoline and other petroleum products which are carried by Brazilian fleet of Tankers "Fronape – Frota Nacional de Petroleiros. At Cabedelo only berth No. 1 is suitable for discharging petroleum products or to bunker vessels since pipe-line is only connected to berth No. 1. Tankers enter and sail during dark hours from Cabedelo.

DENSITY: Varies from 1020 to 1025 at high water.

FRESH WATER: Supplied by pipe-line alongside quays at rate of 50 cu. m. per hour.

FUEL: Available. Suppliers Messrs. Esso-Brasileira de Petroleo. Pipe-line at berth No. 1 where vessels can bunker alongside. Pipe-line fuel oil, 8 in.; pipe-line diesel, 8 in.

DEVELOPMENTS: The port is being dredged to allow vessels with 33 ft. draft to enter.

GANGWAY/DECK WATCHMAN: Watchmen available. Also the hours of work agree except that Captains have option to choose suitable times when their services are required.

OPENING/CLOSING HATCHES: By stevedores. Crew assist when stevedores not familiar with modern hatches.

CUSTOMS ALLOWANCES: 1 carton cigarettes per crew member at Customs discretion and 1 bottle of whisky or any other kind of spirit, subject to Customs discretion.

IDENTITY CARDS: Foreign crew members not permitted to go ashore without presentation of identity card on which is a photograph of holder and personal details. These cards are provided by the Agent upon arrival. The identity card must be delivered on disembarkation to the Federal Police who will return it to the crew member on re-embarkation.

CONSULS:

Vice-Consulate of the Netherlands	Tel. 4079
Vice-Consulate of France	,, 4588
Vice-Consulate of Portugal	,, 4243

Other consulates at Recife 110 km. from Joao-Pessoa about 2 hours by road.

REPAIRS: Minor repairs only.

DRY DOCKS: None.

REPATRIATION: Repatriation can be arranged via Recife or direct from Joao-Pessoa to Rio de Janeiro. No direct Air Service from Joao-Pessoa available for foreign destinations.

AIRPORT: 9 km. from Joao-Pessoa. Small Airport utilised by National Lines whose planes make regular calls.

TIME: 1 April – 31 Oct. GMT minus 3, Nov. 1 – 31 Mar. GMT minus 2.

HOLIDAYS: For holidays see "Recife". Work is possible during holidays and Sundays provided the Dock Administration and Stevedores are advised in anticipation say 24 hours before commencement. Usually on Good Friday, Christmas Day and Independence Day work at the Cabedelo dock is not obtainable. Same applies to the third Day of Carnival.

POLICE/AMBULANCE/FIRE: Police (located at Joao-Pessoa) 4848. Cabedelo has a small Police Station but no telephone available. Ambulance (located at Joao-Pessoa) 4065 and 4076 (24 km. from Cabedelo). Fire Brigade (located at Joao-Pessoa) 4212.

TELEPHONES: No facilities for placing telephones on board.

AUTHORITY: Delagacia de Capitania de Porto Cabedelo.

CARMOPOLIS: 11.00 S. 37.04 W. (See Plan Book)

LOCATION: Terminal Maritimo de Carmopolis, Tecarmo, operated by Petroleo Brasileiro SA, Petrobas, is located in the Atalaia Beach, Lat. 11° 00′ 30″ S. 37° 04′ 00″ W. in Aracaju City, capital of the State of Sergipe.

DOCUMENTS: See "General" before first port.

PILOTAGE: All manoeuvres will be undertaken by the vessel's Master, with the help of a Carmopolis Mooring Master, who will board the vessel in the anchorage area and advise the Master on all operations such as mooring, connecting hoses, unmooring, loading, etc. It is important to emphasise that the services of the Mooring Master are afforded without charge and upon the express undertaking and condition that Petrobras shall not be liable for any damage or injury resulting from any advice, assistance or actions given or made by such Mooring Master. In the event it becomes necessary to disregard the Mooring Master's advice, in order to ensure safety of the vessel, the Master must forward a full written report of the circumstances for delivery to the Captain of the Port through the Terminal. It is the responsibility of the Master to notify the Mooring Master of any special conditions or peculiarities such as defective navigation equipment, tackle, gear or lack of necessary equipment which might impose hazards related to handling, mooring and loading the vessel.

Vessel must be moored to the entire satisfaction of the Mooring Master.

Unsatisfactory conditions will be reported to the Superintendent of the Terminal, who is empowered to reject the ship for future calls unless the reported difficulties have been remedied.

APPROACHES: When approaching the terminal, as well as the landmarks (Aracaju Light), there are also 3 fixed lighted platforms, located in the following positions, and can be visible in clear weather for a distance of 22 miles:

P4: 11° 00.23′ S. 36° 56.03′ W.
D8: 11° 09.46′ S. 37° 03.15′ W.
S25: 11° 00.23′ S. 36° 51.56′ W.

When for the first time approaching, and during night hours, contact can be made with the platforms, which maintain VHF Channel 16, and certain information can be obtained regarding anchorage, berthing time, etc.

ETA: Vessels bound to Aracaju or Tecarmo should transmit directly to "Fronape Rio" (through PPR) a message informing vessel's name, flag, port of registry, classification, gross and net tonnage, horsepower, speed, number of crew, Owner's and Master's name.

ANCHORAGE: Due to the peculiar conditions of the terminal, mooring should be undertaken at daylight only. For vessels arriving at night, the advisable anchorage is in position: Lat. 11° 03′ 00″ S. Long. 36° 59′ 00″ W.

Anchorage may be obtained in a depth from 13 to 15 fathoms East or E.S.E. from the mooring buoys, and at a distance of 1 mile. The bottom is a good holding ground.

Anchoring is prohibited West and S.W. of the terminal due to the existence of pipe-lines, which are newly laid down and unmarked on the charts. Strong currents prevailing along the coast line, which occasionally attain rates up to 3 knots.

RADIO: Vessels bound for Terminal Maritimo de Carmopolis should advise their ETA 48 hours prior to arrival, to "Fronape-Rio" through Rio Radio (PPR), as well as to Agent in Aracaju (through Rio Radio (PPR)), Olinda Radio (PPO), Salinopolis Radio (PPL) or Amaralina Radio (PPA). In turn, these stations will send messages to the terminal.

ETA should be in local time, giving name of vessel, Master's name, number of crew, net tons, gross tons, nationality and d.w.t.

Confirmation or change of ETA should be cabled 24 hours before arrival.

When vessel is within about 50 miles of the terminal, contact may be made by VHF radio-telephone on Channel 16 (156.80 mHz) or SSB (2.182 kHz).

MAX. SIZE: Tankers up to 117,000 d.w.t. (part laden) can be accommodated. Max. draft 15 m.

TUGS: There are no tugs available to assist berthing and unberthing.

BERTHING: The terminal consists of 1 berth (6 buoys) designed for loading crude oil. The berth is located 7,150 m. from the shore. Loading of vessels is effected by one 26-in. submarine pipe-line.

Max. permitted draft for the terminal is 15 m. in order to ensure a safe bottom clearance, even under extreme operating sea conditions.

Amidships derrick or crane capacity must not be less than 5 tons, so that hose can be hoisted and connected.

HOSES: There is a submarine pipe-line from shore installations direct to the terminal, which are divided into 2 flexible hoses long enough to reach the ship's manifold. Usually, only 1 hose is connected, of 10 in. diameter, from which 19,000 bbls. is the max. loading rate. Shore labour used to connect hoses. Hoses are lifted on the starboard side.

MEDICAL: Medical treatment and/or hospitalisation, if required are provided at Aracaju private hospitals. Dentists are also available in Aracaju. Agent will make such arrangements.

For emergency cases (injury etc.), Petrobras first aid may be requested by the Master.

MOORING: Vessels moor using both anchors forward with 2 lines from the port bow to No. 2 mooring buoy and from the stern run 8 to 10 ropes to the buoys, depending upon weather conditions and strength of currents.

BALLAST: No slop facilities are available for dirty ballast.

Brazilian Laws are very strict with regard to the pollution of coastal waters. Vessels are not allowed to discharge dirty ballast into the water. Heavy fines are imposed for violations. To offenders, fines will be charged (besides resulting delays) according to the ship's tonnage.

WEATHER: During Winter months, weather conditions are not favourable. Heavy swell prevailing at the sea berth from S./S.E. direction which causes a continuous rolling on the ship during the whole time of loading operations. The terminal is only sheltered from the North to West, and W.S.W. winds which are very rare during the Winter months.

CARGO: The cargoes are called Sergipano Crude Oil of an average API 33, temp. 90° F., Plataforma Crude Oil of an average API 40.3, temp. 90° F. or Carmopolis Crude Oil of an average API 23.4, temp. 90° F. No heating required.

FUEL: No bunkers available at Aracaju Terminal.

FRESH WATER: No water available.

AIRPORT: There is an airport at Aracaju.

CUSTOMS ALLOWANCES: Brazilian Laws are strict with regard to smuggling, and Masters are requested to instruct their crew not to retain cigarettes in carton lots, cigars, tobacco, alcoholic drinks, drugs, souvenirs, etc.

By no means will any commercial transactions be tolerated be it either among terminal employees, crew members or anyone else.

AUTHORITY: Petroleo Brasileiro S.A.

FORTALEZA: (including Mucuripe), Ceara: 03.41 S. 38.32 W.

PORT LIMITS: From the end of the mole on a true bearing of 235° to the meridian of 38° 29.8′ W., thence to the coast.

DOCUMENTS: See "General" before first port.

PILOTAGE: By Associacao de Praticagem do Porto de Fortaleza. Address: Rua Dragao do Mar, 372. Tel. 212088. The Pilots board ships about 0.5 miles N.W. from the breakwater, call by International Code Signals.

Pilot may be ordered through the vessel's Agent or Fortaleza Radio (PPC). One hour before arrival specifying time of arrival and from which point the Pilot is required.

ANCHORAGE: Vessels awaiting Pilot may anchor W.N.W. of the breakwater head, distance 0.5 miles. Water depth 32 ft.

RESTRICTIONS: Entrance channel Length 1,000 m., width 150 m., depth 8 m.

MAX. SIZE: Up to 27 ft. draft depending on the tide.

HEALTH: The inspection area for Port Health and the other authorities is within 1,430 m. of position 03° 42′ 24″ S., 38° 29′ 18″ W.

All ships must be visited by Port Health Inspector. If vessel has passengers in transit for another Brazilian port, another visit will be required at port where passengers disembark. If ship's health condition satisfactory, Inspector will give free pratique immediately. Radio pratique available if Master able declare satisfactory health condition before arrival. Free pratique is valid for subsequent ports in Brazil.

If there is a crew member to be hospitalised, the Health Inspector will issue pass to hospital on request of Master or Agent who will be made responsible for all expenses incurred.

Inoculations for International Certificates can only be given by an employee of the Port Health Authority.

Ships are inspected by Custom House and Health personnel at the anchorage.

TUGS: One tug available.

BERTHING: 1,116 m. of berthing length. Berths for five vessels. One grain elevator, capacity 150 t.p.h. Four lighters available capacity up to 70 tons each.

Berth No. 1. 106 m. long, 18 ft. deep.
Berth No. 2. 150 m. long, 20 ft. deep.
Berth No. 3. 170 m. long, 22 ft. deep.
Berth No. 4. 530 m. long, 25 ft. deep.
Berth No. 5. 160 m. long, 33 ft. deep.

Vessels are advised to take a Pilot and use a tug if available due to the peculiar port variations.

Vegetable oils can be loaded in drums, 18/20 t.p.h. or ex-barge at 100/125 t.p.h.

CRANES: A 100 ton floating crane is on order. No. 4 berth has 5 cranes with capacities from 3 to 6 tons. No. 3 berth has a travelling suction tower with 2 tubes, operating at 120 t.p.h.

TANKERS: An extension is planned by No. 1 berth, for use of tankers, that at present, must use No. 5 berth. Dredging will be undertaken to a depth of 12 m. alongside the extension.

Tankers discharge crude, and are able to load clean oils through 7 lines ranging from 6 in. to 8 in.

FRESH WATER: Nine hydrants on the quay spaced 50 to 80 m. apart. Connections 2 in. Rate 20 t.p.h.

FUEL: Boiler fuel available from seven connections spaced along the quay. Diesel oil is available by road tanker. Also see "General" before first port.

REPAIRS: Two workshops available for machinery repairs. No electronic repairs possible.

TELEPHONES: Available on board through the Ceara Dock Co.

CONSULS: None at Fortaleza.

IDENTITY CARDS: Foreign crew members not permitted to go ashore without presentation of identity card, on which is a photograph of holder and personal details. These cards are provided by the Agent upon arrival. The identity card must be delivered on disembarkation to the Federal Police who will return it to the crew member on re-embarkation.

REPATRIATION: Can be arranged.

AIRPORT: Only internal services from local airport.

POLICE/AMBULANCE/FIRE: Maritime police tel. 24.14.94; Ambulance 21.34.34 and 21.22.22; Fire 23.13.81.

SHORE LEAVE: Allowed under control of maritime police.

AUTHORITY: Companhia Docas do Ceara.

ILHEUS: 14.49 S. 39.00 W.

DOCUMENTS: See "General" before first port.

PILOT: Call by flag signal. Locality of pilot station marked on chart. Type of boat: sailing.

ANCHORAGE: Marked on charts.

RESTRICTIONS: Vessel must wait daylight for pratique.

HEALTH: Port doctor visits all ships on arrival and requires Maritime Declaration of Health, Deratisation Certificate, 2 Crew Lists. Vessels from another Brazilian port automatically receive free pratique and should not fly Quarantine Flag. If suspected disease or fever on board it is advisable to cable Agent before arrival.

MEDICAL: All facilities available. If doctor needed on arrival or making emergency call to land sick persons, cable ETA 12 hours before arrival.
TUGS: Three private companies own tugs.
BERTHING: There is a total of 432.5 m. of quay available. The wharf extends 110 m. West from the breakwater. There are 5 Portal cranes (3×3 tons, 2×6 tons). Loading rates for bagged cargo of cocoa and coffee approximately 30/45 t.p.h. per gang. Discharge of bulk wheat by grab. Tankers moor partially off the quay to a stern buoy.
STEVEDORES: Arranged by Agent.
TANKERS: Terminal owned by Frota National de Petroleiros. Buoy mooring.
FRESH WATER: Available. Rate 50 t.p.h.
FUEL: Not available.
DEVELOPMENTS: Port will be completed in two years.
WATCHMEN: Compulsory.
HATCHES: By stevedores.
CUSTOMS ALLOWANCES: Only sufficient tobacco for daily use. No alcohol to be taken ashore.
IDENTIFICATION CARDS: Necessary to go ashore.
CONSULS: Only in city of Salvador.
REPAIRS: Workshop belonging to Port Administration. Minor repairs only.
REPATRIATION: Can be arranged.
AIRPORT: Situated near port.
HOLIDAYS: Work can be arranged on all holidays.
POLICE/FIRE/AMBULANCE: Police tel. 2530; Ambulance 2417.
TELEPHONES: No connection to vessels can be made.
SERVICES: Diving service available.
SHORE LEAVE: Allowed with identity card.
AUTHORITY: Delegacia de Capitania dos Portos.

IMBITUBA 28.13 S. 48.38 W. (See Plan Book)

DOCUMENTS: See General before first port.
PILOTAGE: There are two entrance channels. The North Channel has a depth of 10 m. the South Channel has a depth of 13 m.

No VHF facilities and Pilot is summoned by two prolonged blasts. The Pilot should be given an ETA at least 24 hours before arrival. Confirmation at 12 hours, via Radio PPF.
ANCHORAGE: Vessels may anchor in 10 to 11 m., off the entrance, although this is exposed to N.E. or East winds.
RESTRICTIONS: A breakwater protects the port. Vessels are restricted to a draft of 28 ft.
BERTHING: The port consists of a wharf 308 m. long with depths varying from 10–11 m. Depth in manoeuvring basin also 10–11 m.

The coal installation has a delivery rate of 24 t.p.h.
CRANES: Three 15 ton cranes, three 13 ton cranes, one 3.5 ton crane.
MEDICAL: Facilities available. Hospital in town.
FRESH WATER: Available from 1 inch lines on the pier. Delivery rate 6 t.p.h.
FUEL: Available by lorry. Also see "General" before first port.
REPAIRS: No facilities other than for minor repairs.
CONSULS: (At Rio Grande).

ITAJAI: 26.56 S. 48.38 W.

DOCUMENTS: See "General" before first port.
PILOTAGE: To await or to receive Pilot, anchor from half to two miles East of South Breakwater.

Pilot Service does not have radio or VHF; any telegram can be addressed to Pilots Service in Itajai (Servico de Praticagem–Itajai), but customary to send all advices to Pilot Service via Agents.

Pilot Service has three launches painted red with a "P" on side and on funnel. Launches always anchored inside port. In case of bad weather, vessel must wait for instructions in Porto Belo Bay, South of this port, and in case of bad weather on sailing, if impossible to disembark Pilot in entrance of bar, must be done in Porto Belo Bay.
ANCHORAGE: Waiting anchorage situated in Enseada de Cabecudas, up to two miles distant from South light, depth of 8 m.
RESTRICTIONS: Vessels can enter or sail at any tide with a max. draft of 18 ft. Vessels with a max. draft of 22 ft. may enter or sail at high water. Tanker movements in daylight only. Max. speed allowed in the access channel is 5 knots.
MAX. SIZE: Max. length 160 m. for dry cargo vessels. For tankers, max. length 155 m.
HEALTH: When coming from abroad, vessel will be visited by Health Authorities, who issue free pratique after inspection. When coming from another Brazilian port, free pratique issued in previous port is sufficient. This document must stay on board, to be presented in subsequent ports. In case of sickness on board, after receiving free pratique, must contact Agent who notifies Health Service.
RADIO: For telegrams (radio) direct from vessel to Agent, or vice-versa, Departamento de Correios e Telegrafos radio station in Santos or Florianopolis, with prefixes: Santos PPS, Florianopolis PPF.
TUGS: Tugs service by launch from Pilot Service, and is used only in unmooring (to assist in turning round in front of quay) for vessels more than 100 m. long.
BERTHING: Previous communication required, time of priority based on time of arriving at bar. Length at quay, 703 m., depth alongside 6 m.
CRANES: 1×20 ton mobile crane for containers. 3 other moveable cranes. 2×1.5 ton Portal cranes, 1×3.5 tons, 1×5 ton.
STEVEDORING: Stevedores' hours as follows: Morning until 0700 hrs. Afternoon until 1230 hrs. Evening until 1900 hrs.

When vessel arrives in morning, advisable that Captain advises in advance number of gangs he will need so that Agency can make arrangements.

When discharging dry bulk cargo (grain or salt) trucks with special equipment used.

Average for loading: *(a)* Timber 120 tons/gang day. *(b)* General Cargo 100 tons/gang day. *(c)* Bags and Tobacco 90 tons/gang day.

For discharging: *(a)* General Cargo 100 tons/gang day. *(b)* Bulk 120 tons/gang day.

Hours as follows: 0700 to 1100 hrs.; 1230 to 1630 hrs.; 1900 to 2300 hrs.; 2400 to 0430 hrs.
MEDICAL: In urgent cases, advise Agent requirements in advance. Hospital available. Normally no special vaccination required, nor presentation of certificates.
TANKERS: 5 oil terminals where vessels 155 m. length and 22 ft. draft discharge.

Shell terminal
Fuel oil 10 in. for discharging 4 in. for loading.
Diesel 6 in. for discharging 4 in. for loading.
Gasoline 6 in. for discharging.
Kerosene 6 in. for discharging.

Esso terminal
Fuel oil 8 in. for discharging 4 in. for loading.
Diesel oil 6 in. for discharging 4 in. for loading.
Gasoline 6 in. for discharging.
Kerosene 4 in. for discharging.

Atlantic terminal
Diesel 6 in. for discharging.
Gasoline 6 in. for discharging.
Kerosene 6 in. for discharging.

Ipiranga terminal
Diesel 6 in. for discharging.
Gasoline 6 in. for discharging.
Kerosene 6 in. for discharging.

Heliogas terminal
Gas 6 in. for discharging liquid 4 in. for discharging vapour.

DENSITY: During low tide whole port is influenced by fresh water of River Itajai – Acu, situation changing completely at high tides.
FRESH WATER: Available, supplied direct by hydrants along quay. Average supply 10 t.p.h.
FUEL: See "General" before first port.
DEVELOPMENTS: Two grain silos in port area under construction.
WATCHMEN ON GANGWAY: Not compulsory, but recommended.
OPENING/CLOSING HATCHES: By stevedores.
CUSTOMS ALLOWANCES: Customs can liberate one or two cartons of cigarettes and one or two bottles of spirits, dependant on time vessel remains in port.
IDENTITY CARDS: Foreign crew members not permitted to go ashore without presentation of identity card, on which is a photograph of holder and personal details. These cards are provided by the Agent upon arrival. The identity card must be delivered on disembarkation to the Federal Police who will return it to the crew member on re-embarkation.
CONSUL: Argentine Consulate, Tel. 348.
REPAIRS: Almost all repairs on engines or deck possible.
REPATRIATION: Repatriation, normally made by Agents via Rio de Janeiro and/or Sao Paulo.
AIRPORT: Situated about 10 kilometres from port. Daily regular flights to Sao Paulo, Porto Alegre, and Rio de Janeiro by Varig.
TIME: 2 Mar. – 30 Nov. GMT minus 3 hours. 1 Dec. – 1 Mar. GMT minus 2 hours.
HOLIDAYS: New Year's Day (January 1st); Good Friday; Tiradentes (April 21st); Labour Day (May 1st); Corpus Christi; Proclamation of the Republic (November 15th); Independence Day (September 7th); Christmas Day (December 25th).
POLICE/AMBULANCE/FIRE BRIGADE: Police 312; Ambulance 500; Fire Brigade 339.
TELEPHONES: There are facilities for placing telephones on board.
AUTHORITY: Junta Administrativa do Porto de Itajai.

MACEIO: 09.40 S. 35.45 W.

PORT LIMITS: Off "Peixe-Pau" buoy 1 mile due South of red light at end of old pier. The Sugar Institute (IAA) accepts Notice of Readiness only after having been signed by Surveyor to the effect that holds are in all respects ready to receive cargo.
DOCUMENTS: See "General" before first port.
PILOTAGE: Request for Pilot to be made through Agent at least 12 hours prior to arrival during week-days and 24 hours prior to arrival on week-ends and holidays. Pilot boards from pilot launch painted red and white, at Peixe-Pau Buoy, 1 mile due South of end of pier, identified at night by red flashing light. No radio. Light signals used for communication with pilot boat. Vessels may anchor off Peixe-Pau Buoy in bad weather.
ANCHORAGES: In vicinity of and within inner harbour – depths from 15 ft. to 24 ft. MLW.
RESTRICTIONS: Max. permitted speed between the Peixe-Pau Buoy and the port is 6 knots.
MAX. SIZE: No restrictions on length. Vessels may enter day and night. Pilot refuses to berth tankers after nightfall.

Vessels have loaded up to 33 ft. draft.
HEALTH: No Health Authorities board vessel. In event of suspected

disease or fever on board, advise Agent by cable so that Port Authority may take appropriate action.

RADIO: Radio Olinda (Recife), call sign PPO. Radio Amaralinha, call sign PPA.

TUGS: None available or required.

BERTHING: Berths available day and night, weather permitting.

Sugar Terminal: facilities for loading bulk molasses. Projected loading capacity 1,000 t.p.h. of bulk sugar, 300 t.p.h. molasses.

Sugar wharf: 250 m. length. General cargo wharf 400 m. length, undergoing extension by a further 100 m. Depth alongside 33 ft.

A new loading installation fitted with a travelling retractable arm, using a centrifugal spinner, and capable of delivery 1,000 t.p.h. 24 hours a day is being assembled on this berth.

There are two Molasses tanks at the end of this wharf, loading rate 100 t.p.h.

A tanker jetty may shortly be situated at the old fishing wharf.

STEVEDORES: ETA required 24 hours before arrival to arrange gangs. When work required Saturdays and Sundays, ETA must be sent on Friday. Loading/discharge – General: 8 t.p.h. per gang. Sugar 20 t.p.h. per gang. Grain 60 t.p.h.

CRANES: 6 cranes with capacity of 10 tons awaiting installation. 2 diesel operated cranes of 8 tons capacity in operation.

MEDICAL: No advance notice needed except if vessel due to arrive on Saturday/Sunday in order to arrange doctor and/or hospital. Hospital facilities available.

TANKERS: 1 tanker berth. Max. draft 33 ft. 1 pipe-line 8 in. for Gasoline and one 6 in. for diesel/kerosene.

FRESH WATER: Fresh water available. Pipe-line from Water Tower by gravity. Rate about 15 t.p.h. 11 points at the general cargo wharf and 5 at the Sugar wharf.

FUEL: Diesel oil available from Shell, Texaco, Esso and Atlantic. However, storage capacity is small and it may not always be available. Delivery is gravity feed from road tankers. Also see "General" before first port.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CUSTOMS ALLOWANCES: One carton cigarettes to be declared. One bottle alcohol, open, to be declared.

IDENTITY CARDS: Foreign Crew members not permitted to go ashore without presentation of Identity Card, on which is a photograph of holder and personal details. These cards are provided by the Agent upon arrival. The Identity Card must be delivered on disembarkation to the Federal Police who will return it to the Crew member on re-embarkation.

CONSULS:

Norway	2276	Portugal	2449
Italy	3302	France	2126
Spain	2640		

REPAIRS: Small repairs only can be effected.

REPATRIATION: Carried out by Recife Consulates.

AIRPORT: 11 miles North of town. Served by Varig, Vasp and Sadia.

TIME: GMT minus 3 hours.

HOLIDAYS: Work prohibited on Labour Day only. Other days on which work is considered overtime and charged as such are: 1st January, Good Friday, 7th September, 15th November and 25th December.

POLICE/AMBULANCE/FIRE: Maritime Police 2282; Riot Police 4488; Ambulance 2666 and 4433; Fire Brigade 2447.

TELEPHONES: Telephone on quayside. No arrangements yet for placing on board.

GENERAL: Prevailing winds: Summer months – N.E. Rainy season – S.E. with strong South winds during July/August/September and strong undertow during August/September.

DEVELOPMENTS: The Salgema marine terminal is being built across the bay. It will consist of a jetty 1,300 m. long. The loading platform will allow 18,000 d.w.t. vessels to load in 11 m. depth.

Loading Caustic Soda	12 in. line	330/350 cu.m./hr.
Ethylene Chloride	10 in. line	330 cu.m./hr.
Ethylene Cryogenic	8 in. line	330 cu.m./hr.

AUTHORITY: Delegacia de Capitania de Porto.

MANAUS: 03.08 S. 60.00 W.

DOCUMENTS: See "General" before first port.

PILOTAGE: Pilots join vessel at Belem and make the round voyage back to Belem. Vessels entering via North Channel take a Pilot at Santana. No Pilots from Barra Norte to Santana.

ANCHORAGES: Suitable places can be indicated by the Pilot.

Anchorage for vessels over 3,000 g.r.t. Lat. 03° 09′ 00″ S. Long. 60° 01′ 48″ W.

Anchorage for vessels of less than 3,000 g.r.t. Lat. 03° 09′ 00″ S. Long. 60° 02′ 12″ W.

Vessels impounded or requiring considerable repairs Lat. 03° 08′ 30″ S. Long. 60° 02′ 30″ W.

Vessels in quarantine Lat. 03° 08′ 48″ S. Long. 59° 55′ 48″ W.

RESTRICTIONS: Passage across Barra Norte to be made at high water only. Berthing and unberthing preferably takes place at Manaus in daylight.

MAX. SIZE: Entry to the Amazon via the North Channel; max. draft 30 ft. Via Belem; draft 29 ft. with a length up to 175 m. and draft 24 ft. with a length up to 210 m.

HEALTH: See "General" before first port. All ships must be visited by Port Health Inspector. If vessel has passengers in transit for another Brazilian port, another visit will be required at port where passengers disembark. If ship's health condition satisfactory, Inspector will give free pratique immediately. Radio pratique available if Master able declare satisfactory health condition before arrival. Free pratique is valid for subsequent ports in Brazil.

If there is a crew member to be hospitalised, the Health Inspector will issue pass to hospital on request of Master or Agent who will be made responsible for all expenses incurred.

Inoculations for International Certificates can only be given by an employee of the Port Health Authority.

RADIO: Salinopolis Radio or Rio Radio. There is also Barbados Radio Station at Belem.

TUGS: Agents provide mooring launches.

BERTHING: Arranged by Agent who asks permission from local Port Authorities to provide a berth. All berths suitable for vessels able to navigate the river.

Two floating stages in "T" jetty form.

Easterly stage 272 m. long. Floating roadway 252 m. There are 3 cranes on this stage.

Westerly stage 275 m. long. Floating roadway. No cranes.

Water depth 35 m. at both stages.

Warping buoys must be used when leaving stages as there are no tugs.

A third stage is planned.

A stone jetty 500 m. long will shortly be available for year round operations, when it has been fitted with Portal cranes.

Moageria Berth: Used for the discharge of bulk grain, one tube, rate 30 t.p.h.

CRANES: Ten fixed electric cranes with capacity 1.5–7.0 tons. Three mobile cranes, capacity 4, 6 and 15 tons.

STEVEDORES: Available.

MEDICAL: Doctors and hospital facilities available.

TANKERS: *Copam Refinery Berth:* a floating pontoon with buoy moorings ahead and astern. Vessel berths starboard side to, using port anchor.

Facilities for crude discharge. Products only loaded. No dirty ballast facilities.

No. 1 Terminal. Vessel lies to 4 buoys, and picks up a floating line, normally attached to the bank. Available for products only.

DENSITY: Fresh water.

FRESH WATER: Not suitable for drinking purposes.

FUEL: Bunker C and Diesel. Available ex-barge or at the terminal. Also see "General" before first port.

IDENTIFICATION CARDS: Required.

GANGWAY/DECK WATCHMEN: Compulsory.

OPENING/CLOSING HATCHES: Performed by stevedores.

CUSTOMS ALLOWANCES: 200 cigarettes per man. Only normal daily consumption wine/spirits allowed.

CONSULS: Following countries are represented at Manaus:

U.S.A.
Japan
Peru
Colombia
Bolivia
Venezuela
Uruguay
Italy
Belgium
France
Holland
Spain
Great Britain
Portugal
Denmark

REPAIRS: Very limited facilities available.

REPATRIATION: Can be arranged.

AIRPORT: Regular daily international flights from Manaus Airport.

TIME: GMT minus 5 hours.

HOLIDAYS: 1st January; 1st May; 29th June; 7th September; 8th December; 25th December; 31st December.

POLICE/FIRE/AMBULANCE: Civil Police tel. 22113; Maritime Police 22315; Fire 21155; Ambulance 21112.

TELEPHONES: Arrangements can be made for telephone connections on board.

SHORE LEAVE: Allowed.

AUTHORITY: Administracao do Porto de Manaus.

NATAL: 05.47 S. 35.12 W.

Port situated on East bank of Potengi River, 2 miles from sea.

DOCUMENTS: See "General" before first port.

APPROACHES: Reefs at river mouth form natural breakwater. Entrance channel 200 yards wide with sharp bends.

PILOTAGE: Arranged by Agents who require at least 12 hours notice of ETA. Pilot boards at Outer Roads.

ANCHORAGES: The following are the zones for vessels anchoring prior to entering port;

Anchorage for vessels more than 3,000 g.r.t. – between the access channel and the right bank of the Rio Potengi, from 05° 46′ S., along an extension of 800 m. to the N.

Vessels impounded or requiring considerable repairs – same anchorage as for vessels over 3,000 g.r.t.

Anchorage for vessels up to 3,000 g.r.t. – facing the launch embarkation point at the end of the Rua Tavares de Lira, and to 150 m. along the right bank of the Rio Potengi.

Vessels in quarantine within a radius of quarter of a mile around a point half a mile to the South of the waiting point for the Pilot.

RESTRICTIONS: High water depth at bar 24 ft. to 26 ft., varies with tide and wind.

MANOEUVRING: The area intended for manoeuvring when coming alongside or leaving the port has a width of 300 m. along the whole length of the quay.

In this area and in the access channel anchoring is strictly prohibited except with the prior permission of the Port Captaincy.

MAX. SIZE: Length 520 ft., draft up to 23 ft. 6 in. at spring tides.

HEALTH: Official visit made on vessel's arrival if between 0700 and 1900 hrs. Visits can be arranged at other times.

The inspection area of the Port Health Federal Receipt and Maritime Police authorities is 04° 45′ 06″ S. and 35° 11′ 15″ W.

TUGS: Not available.

BERTHING: Quay length 1,312 ft. Wharf equipped with four 5-ton mobile steam cranes. Depth 24–25 ft.

CRANES: Two 1.5 ton cranes. Two portable tubes for wheat discharge at 10 t.p.h. each.

LOADING: When loading sugar bags, only canvas-bottomed slings to be used. Shippers will not permit loading with ordinary rope slings. Suitable slings can be hired from shore. Six slings required for each working gang.

TANKERS: Oil berth suitable for vessels up to 520 ft. length.

CUSTOMS ALLOWANCES: One opened bottle spirits and 200 cigarettes per crew member per week.

FRESH WATER: Available at the wharf, rate about 18 t.p.h.

FUEL: Available, delivery by road tanker, rate 32 t.p.h. Also see "General" before first port.

CONSULS: France, Italy, Lebanon, Portugal and Spain.

TELEPHONES: None available for installation aboard ship.

REPAIRS: There is a Naval Base at Natal, which apart from providing service to naval vessels, also deals with merchant vessels requiring repairs. The Base has seven departments, Mechanical, Naval Carpentry, Electricity, Electronics, Sails, and Painting, and a Docking System comprising two floating docks and one office ship. The Goias Dock has a capacity for vessels up to 1,000 tons and 4.80 m. draft. There is a ballasting service.

The City of Natal Dock has a capacity for vessels up to 2,800 tons and 5.80 m. draft.

Apart from other facilities, the Base has maintenance, refrigeration and kitchen services, which can be placed at the disposal of vessels during repairs to their own installations.

AUTHORITY: Port administration and Harbour Master.

PARANAGUA: 25.30 S. 48.30 E.

DOCUMENTS: Also see "General" before first port.

Documents for clearance inwards of foreign vessels:

a) Certificate of registration.
b) Classification document for the vessel in the port of registration.
c) International Load Line certificate.
d) Safety certificate for passenger vessels or Safety construction certificate for cargo vessels.
e) Safety equipment certificate for cargo vessels.
f) Safety certificate for radio-telegraphy or radio-telephony on cargo vessels.
g) Exemption certificate, in respect of the foregoing certificates, where applicable.
h) Safety certificate for nuclear vessels.
i) Certificate or other financial guarantee in respect of the International Convention governing Civil Responsibility in Damage caused by Oil Pollution, 1969.
Federal Receipt and Port Health Clearance.
Bill of Lading for postal purposes, where the vessel carries mail. Copy of the payment docket in respect of the tariff for using lighthouses.
Crew list.
Cargo manifest.

PILOTAGE: Compulsory in Paranagua Bay from the waiting area of Galheta Channel (circular area of 1.5′ radius, the centre of which corresponds to buoy No. 01 in position 25° 37′ 19″ S. and 48° 16′ 17″ W.) and from the waiting area of the South East channel (circular area of 1.5′ radius, the centre of which corresponds to waiting buoy 25° 35′ 30″ S. and 48° 14′ 47″ W.) up to any mooring point or anchorage area.

Pilotage not necessary for vessels of less than 200 tons.

Pilotage can be requested via the Ship's Agent, four hours in advance, stating time of entry or departure of vessel. Vessels approaching Paranagua should contact Paranagua Radio, Channel 16 VHF, two hours prior to arrival in the pilot waiting area. The Pilots' Association maintains permanent watch on Channel 16 VHF, passing traffic on Channels 10 and 13 VHF. (Tel. 22-0530, 22-1560 and 22-1570). The greatest restriction for pilots is the condition of the sea, which in Galheta channel, with the sea above force 4 – makes the passage of the pilot cutter difficult.

In the last quarter of 1978, the availability of a larger pilot cutter will minimise the problem.

ANCHORAGE: Area "A" for vessels of less than 180 m. length overall.

Point		
"A 1"	25° 29′ 32″ S.	48° 31′ 28″ W.
"A 2"	25° 29′ 51″ S.	48° 31′ 28″ W.
"A 3"	25° 30′ 01″ S.	48° 33′ 31″ W.
"A 4"	25° 29′ 40″ S.	48° 33′ 31″ W.

Area "B" for LASH type vessels, vessels of over 180 m., quarantine and operations with explosives (where necessary).

Point		
"B 1"	25° 29′ 08″ S.	48° 26′ 59″ W.
"B 2"	25° 29′ 30″ S.	48° 26′ 59″ W.
"B 3"	25° 29′ 34″ S.	48° 29′ 43″ W.
"B 4"	25° 29′ 10″ S.	48° 29′ 43″ W.

RESTRICTIONS: The access channels – Galheta and South East are marked on charts 1821, 1822 of the National Brazilian Hydrographical Dept; the Galheta Channel, normally used, is dredged to a depth of 12 m. (39 ft.) with a width of 200 m., and a length of 12 miles. The critical points of the channel are between the pairs of buoys 3–4 and 7–8, where there are currents running across the channel, and with a heavy sea, waves break making the departure of pilot cutters difficult. In the S.E. Channel, the depth varies from 9.23 m. (27 ft.) to 7.01 m. (23 ft.)

HEALTH: Authorities visit vessels at the anchorage.

RADIO: Paranagua Radio, call sign PPG. VHF Channels 24, 25, 26 and 27 for vessels navigating close to the port.

TUGS: 3 private tugs owned by Wilson Sons S.A.: 2 of 1,200 h.p. "Bollard Pull" of 17 tons approx., and 1 of 550 h.p. "Bollard Pull" of 7 tons approx.

BERTHING: Section "A" with max. depth of 10.67 m. (35 ft.) at high tide and 9.45 m. (31 ft.) at low tide; Sections "B" and "C" with max. depth of 9.45 m. (31 ft.) at high tide (springs), 8.84 m. (29 ft.) at high tide (neaps) and 8.23 m. (27 ft.) at low tide.

CRANES: Berth 14: four 12.5 ton portal cranes.
Berth 11 to 7: Two 12.5 ton portal cranes.
Four 6.25 ton cranes.
Six 3.25 ton cranes.

Also, one 30 ton, one 9 ton, and two 5.5. ton cranes.

One 100 ton Heavy Lift Barge, max. reach with 100 tons is 19 m.

BULK HANDLING FACILITIES:

Cargill: One loading tower of 500 t.p.h., movable over a distance of 150 m., capacity 20,000 tons (horizontal silo). Also capacity for 3,000 tons of bulk oil with capacity of 150 t.p.h.

Sanbra: At warehouses 6, 6a and 6b. 2 fixed loading towers, each 100 t.p.h., capacity 12,000 tons. Also two slightly movable elevators, with a total loading capacity of about 100 tons.

At the same berth there is a loading tower, movable over 180 m., with a loading capacity of 500 t.p.h. which is connected to a silo of 60,000 tons.

Gransol: At warehouses 4 and 5. One loading tower, 300 t.p.h., movable over a distance of 150 m. storage capacity 500 tons. 2×12.5 ton portal cranes for containers at Shed 5.

Socepar: One loading tower, 100/150 t.p.h., movable over 110 m. Storage capacity 25,000 tons.

Port Silo: (Operated by the port administration) one loading tower, 150/200 t.p.h., movable over 150 m. Storage capacity 10,000 tons.

Cargill and Sanbra can handle vessels loading to 42 ft. by using pontoons. Other installations, even with the use of pontoons, can only handle vessels loading to 30 ft.

The new grain terminal at warehouse No. 13 consists of 4 interconnected horizontal silos, each with a capacity of 20,000 tons and 2 loading towers, movable over 200 m., loading capacity 1,500 t.p.h. each. The second phase of the construction is a 100,000-ton silo, which will be connected to the 4 horizontal silos, expected to be completed by 1979.

STEVEDORES: *Working Hours:* Daywork: 0700–1100 and 1300–1700, extension possible 1100–1300 and 1700–1900. Nightwork: 1900–2300, 0000–0400, meal hour 2300–0000. Extension possible 2300–2400 and 0400–0600.

Same working hours are valid for Sundays and holidays with 20%–100% surcharge.

MEDICAL: All facilities available. Crew members should hold valid International smallpox inoculation certificates.

TANKERS: Petroleum Berth: 184 m. long, 10 m. depth.

FRESH WATER: 47 hydrants at 45 m. intervals available along the quays, rate 27 t.p.h. No water barges available.

FUEL: Diesel and fuel oil available. Rate for diesel 150 t.p.h. At the present time bunkers and diesel are supplied by private dumb barge, capacity 300 ton. Orders should be placed 24 hours in advance.

A mixing plant will be installed by the end of 1978.

FIRE PRECAUTIONS: *Fire fighting facilities:* 4 conventional fire-fighting tenders. 1 chemical spraying vehicle.

REPAIRS: Small structural and machinery repairs possible in the port. 3 firms available.

SURVEYORS: Principal classification societies are represented in the town:

Lloyd's Register of Shipping;
Lloyd's of London;
American Bureau of Shipping;
Bureau Veritas;
A.B.S. Worldwide Technical Services;
Nippon Kaiji Kiokai;
Germanischer Lloyd;
Det Norske Veritas;
Brazil Salvage S.A.

GANGWAY/DECK WATCHMEN: At least 1 watchman is compulsory on board every vessel alongside 24 hours per day.

OPENING/CLOSING HATCHES: By stevedores.

AIRPORT: Curitiba, 80 km. from the port for national connections. Paranagua, for short distance carriers. Air taxi service also available.

TIME: Local time 3 hours. behind G.M.T.

HOLIDAYS: National: 1st January; 21st April; 1st May; 7th September; 2nd November; 15th November and 25th December. Local: 29th July.

POLICE/AMBULANCE/FIRE: Civil Police 22-0101 and 22-0172. First aid 22-0111. Fire 22-0599.

CONSULS: *In Paranagua:*
Denmark – Avenida Gabriel de Lara, 1471 Tel: 22-0605
Italy – Avenida Manoel Ribas, 317 Tel: 22-0045 and 22-0046
Norway – Avenida Gabriel de Lara, 1471 Tel: 22-0605

Paraguay – Rua Roque Vernalha, 428
Portugal – Avenida Arthur de Abreu, 29–5° andar Sala 5
Uruguay – Rua Doutor Leocadio, 112 – Sala 102
In Curitiba:
Germany – Avenida Joao Gualberto, 1237 Tel: 52-4244
Argentina – Rua Marechal Floriano Peixoto, 228–8° andar – Conj. 803 Tel: 23-5141
Austria – Rua Marechal Floriano Peixoto, 228–17° andar – Cjto. 1707 Tel: 24-6795
Belgium – Rua 15 de Novembro, 297 – Sala 303 Tel: 23-3346 and 23-3490
Bolivia – Rua Presidente Faria, 334–4° andar – apt° 401 Tel: 22-4885
El Salvador – Travessa Oliveira Bello, 67–1° andar Tel: 22-0820
Spain – Rua Visconde de Cerro Frio, 229 – Novo Mundo Tel: 46-1714
France – Rua Lourenco Pinto, 68 Tel: 22-4906 and 22-8866
Honduras – Praca Rui Barbosa, 537 Tel: 24-9911
Italy – Rua Barao do Cerro Azul, 198 2° andar – Tel: 22-3877
Japan – Rua Marechal Deodoro, 51 6° andar – Conj. 601 Tel: 24-3861
Mexico – Rua Comendador Araujo, 795 Tel: 22-0367
Paraguay – Praca Osorio, Edificio ASA – 1° andar Sala 1002 Tel: 23-9010 – Ramal 45
Peru – Rua do Rosario, 63 Tel: 24-2827
Poland – Rua Agostinho Leao Junior, 234 Tel: 22-2472
Portugal – Rua Marechal Deodoro, 126 – 8° andar – Tel: 22-4022
Syria – Rua Ebano Pereira, 28 – 2° andar Tel: 23-3875 and 24-6691
Switzerland – Rua Marechal Floriano Peixoto, 228 – 8° andar Sala 807 Tel: 23-7553
Consulate General for the U.S.A. – Main office in Sao Paulo, Rua Padre Joao Manoel, 20 Tel: 37-5574.

REPATRIATION: Possible.
TELEPHONES: Request for installation should be made to the Traffic Section of the Port Administration.
SERVICES: Cleaning services available.
SHORE LEAVE: No restrictions.
IDENTIFICATION CARDS: I.D. Card, Seamans Book or passport sufficient.
DELAYS: Normally no delays.
AUTHORITY: Port Captain.

PORTO ALEGRE: 30.05 S. 51.15 W.

This information does not apply to Tramandai Oil Terminal which is listed separately.
DOCUMENTS: See "General" before first port.
PILOTAGE: Porto Alegre situated 164 miles up the Lagoa dos Patos, a large freshwater lake, and vessels must take on a Pilot after receiving pratique at Rio Grande, which lies at sea entrance of lake. Pilot and authorities board after arrival at Rio Grande inner anchorage. Pilots arranged by Agent upon receipt of vessel's radioed ETA via Rio Grande Radio (PPJ). Since 40-mile channel between Rio Grande and Lagoa dos Patos is unlit, vessels should proceed from Rio Grande only by daylight, allowing 3 hours to negotiate channel. Vessels over 12 knots may leave Rio Grande for Porto Alegre not later than 1700 hrs. in Summer, or 1500 hrs. in Winter. Vessels under 12 knots not later than 1600 hrs. in Summer or 1400 hrs. in Winter. Entry must be made to Rio Grande at least 3 hours before these times to allow for clearance.
RESTRICTIONS: Vessels approaching Porto Alegre from the Lagoa should do so only by daylight since 30 miles access channel leading from the Lagoa to Porto Alegre poorly lit. If necessary, vessels should anchor off Itapoan Lighthouse at head of the Lagoa, to await daylight before proceeding. On arrival at Porto Alegre, free pratique must again be obtained, and crew lists, store lists, etc., again presented to authorities, who usually visit vessel in berth alongside.
MAX. SIZE: Not recommended that vessel of more than 215 m. LOA attempt to reach Porto Alegre. Max. safe draft from mid-April to mid-October is 17 ft. and from mid-October to mid-April, 16 ft. 6 in.
ANCHORAGES: Inner harbour. Not normally used unless port congested. If vessels are too late for transit they must anchor at either end of the lagoon overnight.
HEALTH: Vessels receive clearance on passing Rio Grande. No yellow flag required. Also see "General" before first port.
RADIO: All messages should be routed via Rio Grande Radio (PPJ).
TUGS: Only small low-powered tugs available. These normally used for unberthing only. Ships' lines normally used. The 4 tugs are 220, 250, 280 and 320 h.p.
BRIDGES: Vessels proceeding up-river from Porto Alegre to oil berth must pass under bridge with lifting-span. Span is lifted when approaching vessel sounds prolonged blast on siren.
BERTHING: The berths are on the East bank of the river, and the jetties stretch over a distance of 8 km.

Maua Quays: Berths "A", "A1" to "A7" and "B", "B1" to "B7". Length, 1,482 m. Depth 18 ft.

Navegante Docks: 2,433 m. long.

Cesa Grain Berth: 2 belts loading rate 100 t.p.h. each. 3 grain elevators, rate 100 t.p.h. each.

Between Maua and Navegante there are several small jetties but none capable of handling ocean-going vessels.
CRANES: *Maua Quays:* Eleven 3 ton portals, two 6.25 ton cranes, four 3 ton portals (Narrow gauge).

There are no cranes available at Navegante Docks.
STEVEDORES: *Working Hours:* 0730–1130, 1300–1700. Overtime 1700–1900, 1900–2300 and 0000–0400 hrs.
MEDICAL: Full facilities available. Crew members should hold valid international smallpox inoculation certificates.
TANKERS: Proceed to oil and LPG berths on Gravatai River for discharge. These berths accessible only to small tankers of up to 1,600 d.w.t. Refer to "Tramandai".
DENSITY: Fresh water at all times, unaffected by tides.
FUEL: Available, delivered by road tanker. Also see "General" before first port.
GANGWAY/DECK WATCHMEN: Vessels at anchor and alongside must have a watchman.
OPENING/CLOSING HATCHES: Usually done by stevedores.
CUSTOMS ALLOWANCE: Each crew member allowed to keep out of bond 1 carton of cigarettes and 1 bottle of wine or spirits.
FRESH WATER: Available from hydrants at all berths. Delivery rate up to 25 t.p.h.
IDENTIFICATION CARDS: Necessary.
CONSULS:
British
German
French
Spanish
Belgium
Danish
Italian
Norwegian
Swedish
REPAIRS: All light deck and engine-room repairs possible. No dry-docking facilities available except for small vessels of up to 300 ft. LOA.
TELEPHONES: Connections available from warehouses A, A2, A4, A6, B, B2, O, O2 and D4.
DEVELOPMENTS: 2 new dredgers are being used to deepen the channels leading to Porto Alegre, permitting a working draft Rio Grande/Porto Alegre of 20 ft.

A new grain elevator with a capacity of 60,000 tons is expected to be ready shortly.
AUTHORITY: Port Captain.

PORTOCEL: 19.51 S. 40.03 W.

Port under construction.
PILOTAGE: See "Vitoria".
APPROACHES: *Access Channel:* Length 400 m., width 150 m., depth 11.0 m. Max. tidal variation 1.8 m.
Manoeuvring area: The manoeuvring basin is marked with buoys. Radius of turning basin 176 m., depth 11.0 m., depth in mooring basin 11.0 m.

Only 1 vessel at a time may navigate the channel.
TUGS: From Vitoria initially, but 2 tugs available later.
BERTHING: Length of quay 230 m., depth 11.0 m.
FRESH WATER: Available.
REPAIRS: No facilities.
MEDICAL: Hospitals at Vitoria and Aracruz.
AIRPORT: At Vitoria.

RECIFE (Pernambuco): 08.04 S. 34.52 W.

(See Plan Book)

DOCUMENTS: See "General" before first port.
PILOTAGE: Contact Pilot Headquarters only by radio. Messages should be addressed to "Associacao Praticagem – Recife". Pilots maintain a permanent watch during day in station which overlooks port area and outer roads to observe any vessel approaching and requiring their services, displaying "G" flag. At night only means of contacting shore is by radio. Pilot boats or launches are painted red, with letter "P" in black.
ANCHORAGES: Most favourable position for ships to await pilot boat is 1.5 miles in direction 303° from "Picao", also just outside the 6 fathom line. In fine weather ships can sail to a position 8 cables from "Picao" in same direction just South of buoy. Anchorage in fine weather between above-mentioned places; in bad weather more than 1.5 miles in direction 303° from "Picao" and North and South of line, in water of 7 and 8 fathoms depth.
RESTRICTIONS: Vessels only enter port at night in cases of necessity. 3ft under keel clearance required when heavy swell running.

The port is situated between 2 channels, 1 to the North, the other to the South, which are the main fairways of the port. The Southern channel is 850 ft. wide by 32 ft. 6 in. deep and the Northern channel is 32 ft. deep but with variable width.

Tankers: May enter and leave during daylight hours only (0500–1800 hrs.). Also see "Tankers".
MAX. SIZE: Vessels 220 m. in length can enter, max. draft 31 ft. Also see "Tankers".
HEALTH: The Brazilian Health Authorities only visit vessel at the first Brazilian port of call. Master must report if all crew is well and in case of sickness on board on arrival Port Doctor when visiting vessel must be informed. After visit Port Doctor gives Master a certificate that vessel has been cleared. Captain must retain certificate on board to show to Health Authorities at other Brazilian ports of call if requested. Heavy fine imposed if document not presented. Also see "General" before first port.
RADIO: Usually vessels calling at Recife communicate with Agents through Rio-Radio-PPR, Fortaleza Radio-PPC or Amaralina-Radio-PPA-Salvador, which messages are relayed by telex via EBCT-Empresa Brasileira de Correios e Telegrafos, who have stations in above-mentioned cities. Recife Radio Station PPO-Olinda Radio, located at local Post Office building at centre of City of Recife (Avenida Guararapes) and has very poor range. Customary for Olinda Radio to relay messages to distant vessels from Recife (port) via other vessels in near range. By no means a sure and reliable method.

TUGS: Pilot brings vessels to inner harbour where tugs available to help to go alongside; not practice for tugs to meet vessels on outer roads. 3 tugs available, largest 1,680 h.p. Vessels up to 5,000 g.r.t. require 1 tug. Vessels over 5,000 g.r.t. require 2 tugs.

BERTHING: Vessels arriving at Recife roads with 26 ft. can enter port on low tide and can go alongside from Sugar Terminal to Warehouse No. 9, over 26 ft. it is better to wait for high tides to enter, 31 ft. being the max. draft for entering Recife.

Depth alongside wharves:

Warehouse No.1–1A: 31 ft.; No. 7–9: 25–26 ft.
„ No. 2–6: 30 ft.; No. 10–11: 25 ft.
„ No. 12–15: 24 ft.;

At anchorage (pool) in port, max. draft is 31 ft. Depth between 32 ft. and 26 ft., the max. rise of tide being 5 ft. Distance from the quay side, 200 m. Manoeuvring space is 1,640 ft. or 500 m. with a depth of 28–30 ft. max.; 590 ft. or 180 m. with a depth of 26 ft.

SPECIAL CARGO FACILITIES: *Cereals:* Silos with unloaders. Silos capacity: 10,000 tons (CAGEP), 23,500 tons (Moinho Recife), 5,600 tons (Port Authority).

Capacity of unloaders: 100 t.p.h. (Warehouse No. 1), 100 t.p.h. (Warehouse No. 9), 150 t.p.h. (Warehouses Nos. 9–10).

Sugar: Sugar Terminal: warehouse capacity 200,000 tons, capacity of loader 1,000 t.p.h.

Molasses: Tanks: capacity to store 14,000 tons, capacity of loader 120 cu. m.p.h.

Cranes:
1 Crane with capacity of 20 tons (Warehouses Nos. 5–6).
1 Crane with capacity of 8 tons
6 Cranes „ „ 5 tons
28 Cranes „ „ 1.5 tons
5 Automobile cranes with elevated cab capacity of 8 tons, with 2 clamshell and 2 graiffers.

Fork Lifts:
1 special fork-lift for containers with capacity of 40 tons.
114 fork-lifts with capacity of 2.5, 3, 4 and 7 tons.

Floating Crane:
1 floating crane with capacity of 50 tons. Hook height above water level is 15 m.

STEVEDORES: Advise Agents of ETA at least 48 hours prior to arrival to make necessary berthing arrangements and hire dock labourers and stevedores in time.

MEDICAL: In *urgent cases* communicate with Agents immediately by means of Radio at least 48 hours prior to vessel's arrival if possible. It is necessary for vessel to enter port to enable sick person to land because on outer roads there is too much swell. Not necessary to Dock. Port Doctor must be advised by Agents and will board to see sick person and grant permission to land in Recife temporarily. Hospitals available also First Aid Stations equipped with ambulances. Port Authority also equipped with ambulance. Crews should always have yellow fever and small-pox inoculation certificates.

TANKERS: Oil companies who keep petroleum products here are: Petrobras, Esso, Texaco, Shell and Atlantic. To discharge petroleum products tankers utilise Warehouse No. 1, 1-A and 2, but only berth of Warehouse No. 1-A is considered by the Port Authorities as inflammable berth. Max. safe draft for a tanker to enter Recife is 30 ft. and entry must take place on high tide.

DENSITY: Low water density in Summer time 1028. High water density in Summer time 1027.

FRESH WATER: Supplied by Port Administration by means of pipelines in the docks. Vessels can be supplied alongside any quay; water fit for human consumption.

The local Port Administration has one water barge, capacity 240 tons, for supply to vessels inside the breakwater.

There are 92 hydrants, diameter 2.5 in., rate 15–20 t.p.h.

FUEL: *Fuel Oil:* This can be loaded between warehouses 1 to 7 by existing network along the quay. At warehouse No. 1 there is a 10 in. take-off point and two of 12 in.: Warehouse No. 2 has a 10 in. take-off and two of 12 in.; No. 3 there are two of 6 in. and one of 8 in.; at warehouse No. 5 one of 8 in.; at warehouse No. 6 one of 8 in. – all with a capacity of 60 to 100 t.p.h. and from warehouse No. 8 to No. 15 tanker trucks with a capacity of 40 t.p.h. Also see "General" before first port.

Diesel Oil: At warehouse No. 1 there is a 6 in. take-off and one of 8 in.; at warehouse No. 2 there is a 6 in. take-off and one of 8 in.; at No. 3, two of 6 in. with a capacity of 40-50 t.p.h.; at other warehouses this supply is effected by tanker trucks.

DEVELOPMENTS: Plans to build berth for exclusive use of tankers at Olinda. Plans are also underway to dredge the access channel to 11.5 m. It is also intended to construct new berths for general cargo and molasses tankers, and to modernise the existing berths.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: Normally by stevedores but crew helps when stevedores not familiar with hatches of modern vessels.

CUSTOMS ALLOWANCES: One carton cigarettes and one bottle of spirits allowed each man at Customs discretion.

IDENTITY CARDS: Foreign crew members not permitted to go ashore without presentation of identity card, on which is a photograph of holder and personal details. These cards are provided by the Agent upon arrival. The identity card must be delivered on disembarkation to the Federal Police who will return it to the crew member on re-embarkation.

CONSULS: The following countries are represented in Recife/Pernambuco:

Argentina
Belgium
Costa Rica
Czechoslovakia
Denmark
El Salvador
Ecuador
Finland
France
Germany
Great Britain
Guatemala
Honduras
Italy
Japan
Lebanon
Mexico
Netherlands
Norway
Portugal
Sweden
Switzerland
Spain
United States

REPAIRS: Available but limited to small mechanical equipment.

REPATRIATION: Facilities by air available.

AIRPORT: Situated 9 miles from docks. 228 flights per week.

TIME: GMT minus 3 hours.

HOLIDAYS: *National Holidays:* Fraternidade Universal (January 1st); Tiradentes (April 21st); Labour Day (May 1st); Brazil's Independence Day (September 7th); Commemoration of the Republic (November 15th); Christmas Day (December 25th).

State Holidays: Nossa Senhora da Conceicao (December 8th); Nossa Senhora do Carmo (July 16th); Carnival 3rd Day; Good Friday, Memorial Day (November 2nd).

POLICE/AMBULANCE/FIRE: Harbour Police 2241686; Port Administration Fire Brigade: 224007; State Fire Brigade: 193; Ambulance (First Aid): 192; State Police: 190.

TELEPHONES: Can be connected on board if requested.

AUTHORITY: Administracao do Porto de Recife/Pernambuco.

RIO DE JANEIRO: 22.55 S. 43.12 W. (See Plan Book)

(A) GENERAL CARGO SECTION. (B) TANKER SECTION.

SECTION A

DOCUMENTS: See "General" before first port.

CLEARANCE: All clearance is taken care of at the quarantine anchorage (pratique, custom's immigration). Accommodation ladder must be rigged for this purpose.

After clearance by the customs a dark blue flag with a white five-pointed star in the middle must be shown day and night during vessels stay in port. Deratisation service is available. Inspection of the vessel will be made by inspectors to whom the valid deratisation or derat-exemption certificate must be shown.

PILOTAGE: Entrance to Guanabara Bay is 1 mile wide between Ponta de Santa Cruz and Ponto de Sao Joao. This is divided into two parts by Ilha Lage 0.6 mile W.N.W. of Ponta de Santa Cruz. Main channel for entering port is on the East side of Ilha Lage, depth 30 to 50 m. The channel between Ponto de Sao Joao and Ilha Lage, depth 5.7 m. should be avoided.

Pilots are ordered by vessel's Agent, who should be kept informed of vessel's ETA. Unless pilotage from sea required, Pilot will board with Port Authorities at quarantine anchorage in approx. position 22° 53′ S. 43° 09′ W.

Pilotage is compulsory within the port limits, which extend from the quarantine anchorage to the W., N. and E. The approach from sea to the quarantine anchorage may be done without a Pilot, but for deep draft vessels it is recommended to take a Pilot because of the narrow deep draft fairway. If requested, the Pilot will board the vessel 2 miles South of Cotunduba Island. Pilot boats are painted red with a black "P".

ANCHORAGE: In the Rio de Janeiro port area, the following areas are designated for anchorage of vessels coming into port.

Anchorage for vessels up to 22 ft. (6.7 m.) draft Anchorage No. 3. Within 300 m. radius of position 22° 51′ 1″ S., 43° 10′ 8″ W.

Anchorage for vessels with 22 ft. (6.7 m.) draft or more within 800 m. radius of position 22° 51′ 5″ S., 43° 08′ 6″ W.

Vessels impounded or requiring extensive repairs: position determined by the Port Captaincy for each specific case.

Vessels in quarantine: position 22° 50′ 7″ S., 43° 08′ 6″ W.

Vessels carrying explosives and inflammable material: position 22° 51′ S., 43° 11′ W.

RESTRICTIONS: Port is accessible to all vessels at all times and states of the tide. Attention must be paid to messages sent by Rio Radio about forbidden areas due to Marine exercises with live ammunition along the coast near entrance to the port.

Access Channel Limits: The port access channel is 200 m. wide, and dredged to a depth of 17 m. (55.7 ft.).

The access channel to the Mineral and Coal Quay is 150 m. wide, 10 m. (32.8 ft.) deep, running true 308°, starting near the Maua Pier and extending to the quay manoeuvring basin.

The access channel to the Gamboa Quay and the Sao Cristovao Quay is 300 m. wide along the quay with a depth varying from 6 to 10 m. (19.6 to 32.8 ft.).

The Caju Quay access channel is 80 m. wide along the quay, with a depth of 6 m. (19.6 ft.).

MAX. SIZE: No limits for entering port. Draft limited by berth depth.

HEALTH: Vessels from another Brazilian port automatically receive free pratique and should not fly quarantine flag. If suspected disease or fever on board it is advisable to cable Agent before arrival. Also see "General" before first port.

RADIO: Rio Radio, call sign PPR. Working frequencies 17,194; 13,105; and 8,364 kHz. VHF marine radiotelephone is available. Channel 16 for general call, Channels 11 and 12 for Pilot and harbour purposes.

TUGS: There is adequate tow-boat service at Rio de Janeiro varying from 220 h.p. to 1,200 h.p., tariff being divided into sections – 200 h.p. to 600 h.p. and 601 h.p. to 1,200 h.p. The number of tugs to be employed in a service depends on the tonnage of the vessel and/or nature of the berth and respective approaches, as determined by the naval authorities. Ship's lines usually employed.

Requirements: The assistance of tugs for mooring and departure operations is governed by the following rules:

(a) Manoeuvring at the Gamboa and Sao Cristovao Quays:
vessels up to 2,000 g.r.t. no tug.
2,001 to 5,000 g.r.t. 1 small tug.
5001 to 15,000 g.r.t. 1 large and 1 small tugs.
15,001 to 30,000 g.r.t. 2 large and 1 small tugs.
over 30,000 g.r.t. 2 large and 2 small tugs.

(b) Manoeuvring at the Caju Quay (warehouses 19 to 33):
vessels up to 2,000 g.r.t. without tug.
2,001 to 5,000 g.r.t. 1 small tug.
5,001 to 15,000 g.r.t. 1 large tug and 1 small tugs.
over 15,000 g.r.t. 1 large tug and 2 small tugs.

(c) Manoeuvring at the Mineral and Coal Quay:
vessels up to 2,000 g.r.t. without tug.
2,001 to 5,000 g.r.t. 2 small tugs.
5,001 to 15,000 g.r.t. 2 large and 1 small tugs.
over 30,000 g.r.t. 3 large and 1 small tugs.

(d) Manoeuvring at the Petroleum Terminals, Maua Pier and Docks:
vessels up to 4,000 g.r.t. 1 small tug.
4,001 to 15,000 g.r.t. 1 large and 1 small tugs.
15,001 to 30,000 g.r.t. (loaded) 2 large and 1 small tugs.
15,001 to 30,000 g.r.t. (in ballast) 2 large tugs.
over 30,000 g.r.t. (ballast) 3 large tugs.
over 30,000 g.r.t. (loaded) 3 large and 1 small tugs.

The following must also be observed:

1. All vessels (tankers) manoeuvring at quays which are not terminals will be assisted by tugs as shown in section *(d)*.
2. The requirements in sections *(a)*, *(b)*, *(c)* and *(d)* will apply when the manoeuvre is effected under normal conditions.
3. In abnormal conditions, and according to the Pilot's judgement, other necessary measures will be adopted to ensure safety of the manoeuvre.
4. When a vessel is manoeuvring with the aid of a tug, the Pilot may call for a further tug with power compatible with the requirements of the manoeuvre.
5. A tug will be considered as large where its power is in excess of 600 h.p.

BERTHING: Berth usually accessible day and night. Ratguards obligatory.

For vessels loading iron ore, it is important that hatch combings are not higher than 31 ft. above the water-line in order to pass under the loading belt.

Quay	*Length*	*Depth*
Pier Maua	883 m.	11 m. (36 ft)
Gamboa Quay	3,298 m.	9.5–10 m. (31.1–32.8 ft.)
Sao Cristovao	1,428 m.	8–9.5 m. (26.2–31.1 ft.)
Caju Quay	1,300 m.	6 m. (19.6 ft.)
Mineral & Coal Quay	438 m.	12.5 m. (40.9 ft.)

CRANES: 164 gantry cranes, 20 jib cranes, 10 steam cranes, 7 tracked cranes; 4 floating cranes, largest with capacity of 200 tons.

STEVEDORES: Cable Agent ETA 36 hours before arrival in order to arrange gangs required. When arriving during week-ends or on Monday, Agent needs ETA on Friday afternoon. Loading/discharge rates:

General cargo cases 7 to 8 tons per gang/hour.
Bags 15 tons per gang/hour.
Grain in bulk 1,000 tons per eight hours.
Coal in bulk 7,000 tons per day.
Loading iron ore 25,000 tons per day.

MEDICAL: All facilities available. If doctor needed on arrival or making emergency call to land sick persons, cable ETA 12 hours before arrival.

DENSITY: Salt water at entrance to bay. Further inland water often brackish, and density varies with tide.

FRESH WATER: Available alongside from 69 points, loading rate 30 t.p.h. Also available by barge, capacity 450 tons, loading rate 100–200 t.p.h.

FUEL: See "General" before first port.

DEVELOPMENTS: Plans under study to build new iron-ore loading installation to take vessels up to 100,000 d.w.t.

WATCHMEN: Gangway watchmen strongly recommended for any vessels working cargo with shore labour on board. Watchmen from shore not necessary for coal, iron ore, and oil cargoes.

CUSTOMS ALLOWANCES: Each crew member allowed 2 cartons of cigarettes and one bottle wine or spirits.

IDENTITY CARDS: Foreign crew members not permitted to go ashore without presentation of identity card, on which is a photograph of holder and personal details. These cards are provided by the Agent upon arrival. The identity card must be delivered on disembarkation to the Federal Police who will return it to the crew member on re-embarkation.

CONSULS: Pratically all countries have consuls in Rio.

REPAIRS: All types deck and engine repairs can be effected. Five dry docks. Largest dry dock, length 259 m., breadth 34 m., max. draft 14 m.

POLICE/FIRE/AMBULANCE: Police 234-2020; Maritime Police 243-0181; Ambulance 222-2121; Fire 232-1234.

HOLIDAYS: *Legal Holidays:* New Year's Day (January 1st); St. Sebastian (January 20th); Tiradentes (April 21st); Labour Day (May 1st); Independence Day (September 7th); Proclamation of the Republic (November 15th); Christmas Day (December 25th).

Religious Holiday: All Soul's Day (business and banks closed) (November 2nd).

Movable Holidays: Good Friday (business and banks closed); Corpus Christi (business and banks closed); Carnival (Saturday through to noon on Ash Wednesday) – non-official irregular working hours – banks closed.

Federal and State Government Departments, as well as banks, do not work on Saturday.

TELEPHONES: Available at warehouses 1–8 on request to the Brazilian Telephone Company.

SHORE LEAVE: Shore leave is permitted.

DEVELOPMENTS: Caju Quay is being widened and dredged to 12 m. to provide 2 container berths, 1 sulphur and salt berth, and 1 heavy lift general cargo berth.

The existing iron ore berth will close.

The Coal Quay is expected to cease operations 1980 to allow expansion to be continued to Caju Quay. Both coal and iron ore will be re-routed to Sepetiba.

GENERAL: Vessels to fly signal letters when manoeuvring in port and special Brazilian Customs flag after reception.

AUTHORITY: Captain of the port.

(B) TANKER SECTION. All information refers to the "Petrobras Terminal" unless otherwise stated.

LOCATION:

South Dock-Island (main)
Lat. 22° 49′ 2″ S. East Berth (PP1) or
Long. 43° 09′ 2″ W. West Berth (PP2)
North Dock-Island (secondary)
Lat. 22° 48′ 3″ S. East Berth (PS1) or
Long. 43° 08′ 9″ W. West Berth (PS2)
Butadiene Dock-Island
Lat. 22° 48′ 2″ S. East Berth (PAB)
Long. 43° 09′ 0″ W.
Ilha Redonda Pier
Lat. 22° 48′ 1″ S. West Berth (IR)
Long. 43° 09′ 0″ W.

DOCUMENTS: See "General" before first port.

APPROACHES: The safe access to the Terminal is made through a main (deep but narrow) channel swept to 17 m. (55 ft.) that begins between the Island of Cotunduba and the Point of Leme. It extends as far as the East neighbourhood of the South Dock-Island East Berth. As long as the ship does not exceed 11.3 m. (37 ft.) the access can also be undertaken through the North – South axis passing by Ilha Rasa and the bar's entrance (secondary entry, larger but shallower).

A long bridge (Rio-Niteroi), has been built, linking Ponta do Caju (West) to Ilha do Mocangue Grande (East) will cross the swept channel. Three navigable empty spaces: – the central one 300 m. (980 ft.) wide; 50 m. (165 ft.) high at MLWS, the side ones with 200 m. (650 ft.) in width – will maintain the safe access for ships.

A shoal (reef) in 11.5 m. (36 ft.) deep lies about 0.3 m. E.N.E. of Lage Is. just after the bar's narrow entrance (between Sao Joao and Santa Cruz Points). A wreck marked by a green buoy (CS) lies sunk nearly 1.3 miles Eastward of Cotunduba Is.

ANCHORAGE: Vessels should anchor N.E. of Ilha Fiscal for port authorities clearance. After pratique has been granted they should change anchorage site while awaiting for a berth alongside.

Vessels should anchor clear of the 17 m. (52 ft.) swept channel. They must take care to avoid dropping their anchors on the route of submarine cable near to a line joining the islands of Villegagnon and Boa Viagem.

Prohibited Anchorage: In no circumstances should ships drop anchor Westwards and between South and North platforms due to the existance of submarine pipe-lines connecting Ilha D'agua to the platforms and to Ilha Redonda.

READINESS: Arrival is usually considered the time the vessel reaches the anchorage area or the time the Pilot boards the vessel, whichever occurs first notice of readiness will be accepted at the time the tanker is in all respects ready to operate.

PILOTAGE: Pilotage is compulsory after the ship's free pratique has been granted. From that moment on all movements within the port limits will be made under the assistance of a Pilot. Request for pilotage service may be made either right to the Harbour Pilot's Working Co-operative (pilot station VHF Radiotelephone – Channels 16 and 12. Listening period from 0600 to 1800 hrs. local time) or, through ship's Agent, 24 hours beforehand.

For tankers larger than 100,000 d.w.t. Pilots usually board the vessel outside the main channel's entrance. This will occur if weather conditions permit and by daylight only.

Ships could also use, in most circumstances, a secondary entry which N. – S. axis passes through Ilha Rasa (larger but shallower) as long as their draft does not exceed 11.3 m. (37 ft.). In certain cases and at the discretion of the Pilot, according to the prevailing conditions, ships will use this channel with a draft up to 12.5 m. (41 ft.).

Ships may anchor 1.8 mile on the North of Ilha Rasa for awaiting the Pilot, who will board the ship and proceed by day or night according to ship's draft, visibility conditions, etc.

A pilot ladder must be safely rigged for immediate use and be long enough to reach the Pilot's launch. At night adequate lighting must be rigged so as to enable the Pilot to approach and board the vessel. In addition, a boat rope should be led along the side, from well forward. A lifebuoy with 27 m. (15 fathoms) of rope must be conveniently placed in the vicinity of gangway for use in emergency. Vessels should always make a lee. Tankers of 40,000 d.w.t. or over are requested to have a pilot ladder (preferably with a centre gripping line) rigged alongside the accommodation ladder in order that the Pilot may transfer to it after about 2 to 3 m. (6 to 10 ft.).

MAX. SIZE: Tankers up to 135,000 d.w.t. will operate in the terminal. Draft is 15.8 m. (52 ft.) at low water.

Berthing capacity is limited by structural resistance of installation, actual depth of the swept channel and weather conditions.

South Dock Island (main)

East Berth (PP1) – Tankers up to 15.8 m. (52 ft.) draft will moor and unmoor at any time.

Structural resistance of pier was designed to handle tankers up to 115,000 d.w.t. but under special circumstances this limit will be extended to 135,000 d.w.t.

West Berth (PP2) – By day tankers up to 13.1 m. (43 ft.) draft will moor according to the range of tide.

9.4 m. (31 ft.) draft to a range of 0.0 m. (0.0 ft.).
12.2 m. (40 ft.) draft to a range of 0.3 m. (0.98 ft.).
12.5 m. (41 ft.) draft to a range of 0.6 m. (1.98 ft.).
12.8 m. (42 ft.) draft to a range of 0.9 m. (2.94 ft.).
13.1 m. (43 ft.) draft to a range of 1.2 m. (3.94 ft.).

By night only ships up to 35,000 d.w.t. will moor.

Leaving at night only enough ballasted and with own power, up to 48,000 d.w.t.

Shifting ship from East to West Berth only by daylight, draft 12.8 m. (42 ft.), fair weather and wind speed up to 2 Beaufort;

North Dock-Island (secondary)

East Berth (PS1) – Tankers up to 35,000 d.w.t. will moor either by day or night.

At low tide, the maximum draft permitted is 10.2 m. (34 ft.).

West Berth (PS2) – At night tankers up to 14,000 d.w.t. will manoeuvre. Whenever another tanker is already berthed to the Butadiente Dock-Island, night mooring to the North Dock-Island is not advisable. West-berthing will be undertaken with ebb tide, i.e. the set of the current is South, preferably.

At low water max. permitted draft is 8.2 m. (27 ft.).

Butadiene Dock-Island (PAB)

Manoeuvres will be undertaken at daylight only. Max. permissible draft at low water is 8.5 m. (28 ft.).

Ilha Redonda Pier (IR)

LPG tankers will moor by day only, limitations concerning draft is 9 m. (29.52 ft.) at most. Max. ship's LOA is 200 m. (656 ft.).

Advisable draft for safe manoeuvring: Although the amount of ballast carried on vessels is at the Master's discretion, the table below is recommended as a guide:

Vessels of 30/40,000 tons, draft for'd 16 ft. aft 20 ft.
Vessels of 40/50,000 tons, draft for'd 18 ft. aft 24 ft.
Vessels of 40/70,000 tons, draft for'd 20 ft. aft 28 ft.
Vessels of 70/100,000 tons, draft for'd 24 ft. aft 32 ft.

Vessels over 100,000 tons, should have approximately one-third of the vessel's deadweight in ballast.

RADIO: Vessels under charter to Petrobras bound for Rio de Janeiro should advise their ETA 48 hours prior to arrival to PPR as well as to their Agents when it will be the case, through PPR (Rio Radio – Government Coast Station). Confirmation or change of ETA should be cabled 24 hours before arrival. When within range, tankers may also call Torgua or Fronape VHF radio-telephone stations for instructions. All ETA's should indicate whether it is local time or GMT.

The terminal radio and communication centre is located in the Oil Handling Control Room situated at Ilha D'agua. There is a RT set operating 24 hours a day, on Channel 16 (Delta) and manned by terminal operators.

It is strictly prohibited to use vessel's wireless transmitters in the port of Rio de Janeiro.

Non-compliance with this regulation may result in a fine being imposed on vessel by the authorities.

TUGS: Tugboat assistance is rendered by two Petrobras 1,430 h.p. tug boats (twin motors equipped with controlled pitch propellers). Private tugboats are also available. While rendering such assistance tugs act under the orders of the Harbour Pilot. Petrobras tugs are fitted with fire pumps and monitors (including mechanical foam) to assist in fighting fires. All manoeuvring orders will normally be given by VHF telephone on Channel 13 (Alpha) – 156.65 mHz, however, they usually keep watch on Channel 16 (Delta) – 156.8 mHz. Ships not provided with radiotelephone, orders will be conveyed to the fore tug by a mouth whistle and to the aft tug by the ship's whistle. All orders received by tugs will be acknowledged with a distinct short blast. Hawsers are always supplied by the ship except when tugs are manoeuvring alongside ship in which case the towing lines will be given by the tugs.

The tugs are usually stationed either at the terminal dolphin or "L" pier on Ilha D'agua. The Pilot in consultation with the Master, will decide the number of tugs required for each berthing or unberthing operation. Safety of the Terminal installations demands, at least, two tugboats, even for bow thruster equipped ships.

BERTHING:

Petrobras: Torgua is an oil terminal consisting of four distinguished mooring sites located on different places inside the Guanabara Bay.

All these mooring sites are linked to Ilha D'agua and then to the mainland (Duque de Caxias Refinery – REDUC) by submarine pipelines. Three of them are dock-islands, i.e. island-type offshore platforms lying near to the Eastern edge (about half mile away) of Ilha D'agua (where storage tanks, operation controlling room and part of the administrative staff are placed). Two of these dock-islands are squared platforms (South and North) with two berths each (East and West). The South one is designed for larger tankers consisting of two mooring and two breasting dolphins on each side of the platform. It is normally used for the discharge of crude oil.

The North Dock-Island (smaller) has only two mooring dolphins on each side. Two berths (East and West) are also available. It is generally used for handling derivatives. The third Dock-Island (the smallest and round shaped one) is actually the dolphin of the North Dock-Island square platform. It is known as the "Butadiene Pier" and only one vessel at a time can be berthed there (East) either for discharge LPG/butadiene or loading light grades. Besides these three mooring sites there is a fourth located on Ilha Redonda (approx. 2 miles E.N.E. of Ilha D'agua). This installation comprises one single berth (West), head of a small pier. It handles LPG only. Two spherical refrigerated storage tanks (2,000 tons) can easily be seen from incoming vessels.

Other Terminals: *Manguinhos Terminal* – Operators: Refineria de Petroleo de Manguinhos. At Manguinhos terminal a draft of 36 ft. is permissible. Conventional buoy berth in which two ship's anchors and four buoys are used, one on starboard forward of the bow and three buoys aft. Two ship's lines run to each buoy. The terminal is situated in the inner harbour of Rio de Janeiro and close to the quays. Three 8 in. hoses from an underwater pipe-line are connected to the ship's manifold. Maximum back pressure is 100 p.p.s.i., at the ship's rail. Discharge rate is about 1,000 t.p.h. Care is to be taken that the vessel shall not exceed a draft of 40 ft. during discharge. Bunkering is permitted when discharging cargo.

Riberia Terminal – depth alongside 30 ft.
Shell Terminal – „ „ 31 ft.
Texaco Terminal – „ „ 29 ft.

MEDICAL: Medical treatment and/or hospitalisation, if required, is provided in private local clinics. Dentists are also available. For emergency cases (serious illness or injury) Torgua first aid may be requested by the Master. Internal telephone number is 39.

If patient does not speak Spanish, Portuguese or English an interpreter should accompany him. A nominal amount is charged for any supplies or medicines furnished by the terminal.

CARGO INFORMATION:

Grades	Pipe-lines No.	Pipe-lines Dia. in.	Pipe-lines Volume cu. m.	Pipe-lines cu. m. per hour	Hoses/Arms No.	Hoses/Arms Dia. in.	P.S.I.
South Dock-Island (main)							
			For Loading				
Diesel oil	1	12	90	1,100	1	8	150
Gasoline	1	12	90	1,100	1	8	150
Fuel oil	1	12	90	1,200	2	8 & 12	150
Water	1	6	22	50	1	2.5	150
			For Discharge				
LPP Crude oil	1	32	8,300	4,000	3	8/12/12	150
	1	26	5,994	2,000	3	8/12/12	150
Ballast/slop	1	12	90	600	1	8	150
North Dock-Island (secondary)							
			For Loading				
Gasoline	1	26	465	2,000	1	8	150
	1	12	98	700	1	8	150
Diesel Oil	1	12	98	700	1	8	150
Kerosene (lamp & jet)	1	12	98	700	1	8	150
Water	1	4	12	50	1	2.5	150
Fuel oil	1	14	135	1,200	2	12	150
			For Discharge				
Ballast	1	12	98	800	2	8 & 12	150
Butadiene Dock-Island							
			For Loading/Discharge				
LPG/Butadiene	1	8	575	250	1	8	250
Water	1	4	12	120	1	2.5	150
Ilha Redonda Pier (West Head Berth) IR							
			For Loading/Discharge				
LPG	1	8	5.6	300	1	8(L)	250
	1	6	3.2	—	1	6(V)	250

FRESH WATER: Facilities may be arranged to supply water in North and South platforms only. Water supplying barges are also available.

FUEL: The Terminal is equipped with blending valves and can deliver any type of fuel – as Bunker C fuel oil, marine gas oil, marine diesel oil and intermediates of any grade – concurrently with tankers working cargo, at international prices. Also see "General" before first port.

The supply rates are about 300 mt/hr. for Bunker C, 180 mt/hr. for MGO and 450 mt/hr. for intermediates.

Orders for bunkers should be placed, a minimum of 48 hrs. in advance, to: Marine Fuel Division, Commercial Department. Telegraphic Address: Petrobrasecope. Telex number: 031422 or 031423. Rio de Janeiro – Brazil.

BALLAST: All ballast should be pumped out to the terminal slop tanks. Under no circumstances should it be pumped into the sea even if the ballast is said to be clean. As soon as the ship is moored, the Terminal Representative must be told of the quantity of ballast on board and the estimated time to pump it out. Right after discharging a sludge ballast of high pour point (HPP) oil, tankers are asked to flush the line with water from the main suction inlets. The Terminal Representative must be notified 30 minutes before the ship will be out of ballast.

There are two sludge tanks with a total capacity of about 8,900 cu.m. (56,000 bbls.). The terminal is particularly interested in having vessels complete the deballasting operation promptly after berthing in order to minimise time at berth. Simultaneous loading and deballasting is encouraged on properly equipped vessels.

REPAIRS: Repairs of all kinds can be effected in Rio de Janeiro. There are floating cranes with a capacity of 100 tons. Divers service may be obtained. Dry dock to hold ships up to 33,000 d.w.t. are available. It is suggested that charges should be discussed with ship's Agent prior to proceeding with any repair work.

SURVEYORS: Lloyd's Register of Shipping, American Bureau of Shipping and Bureau Veritas have representatives in Rio de Janeiro. Advance notice should be given in order to arrange for an appointment through Fronape on ship's Agent.

Chas. Martin & Co. petroleum inspectors are available in Rio de Janeiro. Contact may be through Agent. E. W. Saybolt & Co. inspectors are also available in Santos.

Chas. Martin & Co., Rua da Lapa, 200 – conj. 906, 20,000, Rio de Janeiro, GB, ZC-00, Tel.: 242-4219, 245-5636 and 225-3507.

E. W. Saybolt & Co., Rua Bras Cubas, 3, 11,100, Santos, SP. Tel.: 4-6638.

GENERAL:

Gangway: All vessels using the port of Rio de Janeiro must provide a safe gangway. The use of rung ladders (sea ladders) is contrary to port regulations and port authorities will not board except by means of a safe gangway or accommodation ladder. A lifebuoy with 27 m. (15 fathoms) of rope must be conveniently placed in the vicinity gangway for use in emergency. It will be the responsibility of ship to provide and maintain this equipment.

At night, the gangway must be adequately lighted. In addition, a boat rope should be led along the side, from well forward. In the near future a special safe gangway will be provided in the South and North dock-islands.

Repairs: Repair and maintenance services for radar, radio, gyro compass, echosounder, etc., are available. The repair man should be contacted through ship's Agent.

Stores: Provisions and stores are available. Requisitions should be conducted through the Agents. Ship chandlers are normally permitted to visit ships when specifically instructed by Agent.

Launches: Launch service for the transportation of personnel ashore must be arranged through ship's Agents. Terminal boats are intended for operational assistants and they are normally stationed at a small "L" pier on the South of Ilha D'agua (Barge Dock).

Laundry: Laundry service is available throughout each working day. Such service should be requested in the vessel's ETA message to Agents.

Photographing: The taking of photographs within the boundary of the terminal premises is prohibited.

Ratguards: Ratguards must be fitted to all mooring lines.

Sea Pollution: Brazilian law is very strict in regard to the pollution of harbour and coastal waters. Vessels should not discharge dirty ballast, ashes, refuse, etc., into the water. Heavy fines are imposed for violations. All overboard discharge valves from cargo tanks and bilges are to be conducted with the greatest care and vigilance in order that errors or delays in handling cargo valves may not result in overflows. All deck scuppers should be plugged to avoid harbour contamination should an oil spill occur.

Similarly, any hull leakages will be subject to equal restrictions. To offenders, fines will be charged (besides resulting delay) according to ship's tonnage, i.e. 2% of the largest country's minimum wage per each ship's (gross) ton.

Emergency towing wires: Two towing wire ropes (fore and aft) should be hung overboard to the water's edge in such way that tugs can easily make fast if an emergency situation arises.

Shore Leave: Shore leave is normally permitted. Baggage and packages are subject to examination upon entering and leaving the Terminal property and vessels, either by Petrobras watchers or by custom's officers.

Cleaning: Several contractors in the area provide labour for tank cleaning and mopping. Masters need of this service should submit their requirements to ship's Agent who will contact and request a contractor to go on board to discuss details and estimate costs of work to be effected.

It must be pointed out that the Master of the vessel is solely responsible for the fitness of the ship's tanks for loading his next cargo, and will therefore be held liable for any contaminations of the cargo after loading, due to inadequate tank cleaning. Therefore it is up to him to decide the degree of tank cleaning necessary. He may, of course, seek advice from petroleum inspectors in this respect, whenever there is any doubt.

Compass Adjustment & RDF Calibration: Compass adjustment or radio direction finder calibration can be effected by competent hydrographers and extra-masters. Contacts with Agents or through the Pilot's station.

Custom's Watches: Sometimes while vessel is in port, Brazilian custom's officials are assigned on board to ensure compliance with custom regulations. Meals must be supplied to these officials during regular meal hours.

Important Telephone Numbers (PABX):

Terminal's Executive Assistant	10*
Operation Manager	60
Operation Supervisor	68–72–75
Marine Section	50*
Safety Section	40*
Medical Section	39

(*) To be used in working hours only.

DEVELOPMENTS: A new berth is being built on Pombeya Island and dredged to 12 m. This is intended to relieve Ilha de Braes Port.

RIO GRANDE: 32.03 S. 52.05 W.

DOCUMENTS: (See "General" before first port).

PILOTAGE: Bar pilotage is compulsory on approaching Rio Grande contact can be made with Pilots by VHF Channel 16, pilot boat is easily identified as it is painted red. Requests for a Pilot to be made by Agent at least 12 hours in advance for vessels entering and 2 hours for vessels sailing. Bar Pilots either bring vessels with cargo to discharge/load direct to berth, or up to inner anchorage (when no berth is available or in the case of vessels en route to Porto Alegre).

ANCHORAGES: Official anchorage situated at a point between inner light buoys Nos. 4 and 5, just before entrance proper to inner approach channel. In case of necessity, vessels may discharge/load to/from lighters at anchorage where depth is over 35 ft.

RESTRICTIONS: Depending on weather conditions and subject to prior arrangements with Bar Pilotage, vessels drawing less than 24 ft. may enter or leave any hour of day or night. Draft subject to change as access channel is being dredged to 42 ft.

MAX. SIZE: *Bar max.:* subject alteration, see "Restrictions".

Anchorage and bar fourth section: Fourth section is where new super port of Rio Grande will be situated. The natural draft inner roads is 50 ft. therefore if draft at access channel confirmed, foresee no difficulties vessels drawing heavy draft entering and operating at anchorage or super port grain and fertilizer terminals.

Inner New Port (Porto Novo): Subject to alterations.

HEALTH: *(a)* Vessels arriving from a foreign port of call must receive visit of Port Health Authority. Each passenger (whether to land or in transit) and Crew member must be in possession of a valid international vaccination certificate against smallpox. Also see "General" before first port.

(b) Maritime Health Declaration has to be made out and handed to Doctor at time of visit. When all papers have been examined and found in order, the Doctor will authorise lowering of the yellow flag and hand over free pratique.

(c) Vaccination against smallpox can be made on board and respective international certificate issued.

(d) In case of death, suspected disease, serious accident, etc., on board before vessel arrives in port, Master should radio Agent giving full particulars so that necessary steps may be taken with Health/Police authorities.

RADIO: Radio Juncao, call sign PPJ, situated on outskirts of Rio Grande, is a receiving/transmitting station, operating on a wavelength of 600 metres (500 kc/s). There is telephone communication between radio station and shipping offices so that, normally, messages are relayed without any appreciable delay. Radio messages may also be despatched through Florianopolis Radio, via Western Telegraph, and these are also received quickly, under normal conditions. Most Agents are equipped with VHF.

TUGS: Compulsory for vessels over 2,800 d.w.t. Five tugs available. Tugs usually join vessel as soon as she has come through approach channel, in the port proper, but in the case of deeply-laden vessels, normally attend before vessels enter inner approach channel. Ship's lines always used.

Tug Requirements:

Vessel 2,800-5,000 d.w.t. 1 small tug. 5,001–10,000 d.w.t. 1 small and 1 medium tug. 10,001-15,000 d.w.t. 1 medium and 1 large tug. over 15,001 d.w.t. 2 large tugs.

BERTHING: *New Port:* Length of quay, 1,864 m., depth 8.5 m. 38 cranes, capacity 2.5 tons to 10 tons.

Old Port: Only used by fishing vessels.

No mooring buoys. Vessels berth alongside quay to load/discharge. If weather conditions permit, recommended that vessels should berth starboard side to wharf in order to facilitate sailing, especially if there is a possibility of night departure. Turning vessel round before coming alongside, however, may not always be advisable or safe because of wind and current conditions at time. Vessels loading down to maximum safe draft must be starboard side to quay on sailing. If weather does not allow ship to turn on arrival, she must do so as soon as conditions permit, before being too deeply laden.

Oil Carriers: Tankers measuring over 200 m. long have entered and berthed at Rio Grande, coming alongside port side to berth. On sailing, they go out stern first, turning after negotiating approach channel and reaching anchorage. Favourable conditions of wind and current necessary for this manoeuvre.

Installations for discharge of petroleum products: All fuel oil discharged at tanker berth within port proper — i.e. subject to a maximum draft of 29 ft. White petroleum products may also be discharged at this berth. A deep-water tanker pier has been constructed close to the anchorage but it is in limited operation for white products only, because pipe-lines to main storage tanks and refinery have not yet been installed. This pier, which is capable of accommodating two vessels of 160-180 m. overall length, has a depth of over 35 ft.; it also has installations for supplying fresh water which may, in case of necessity, be used by cargo vessels. No facilities for the discharge of residues.

BULK HANDLING FACILITIES: *New port;* depth alongside varies from 26 ft. to 29 ft. depending on berth and has the following facilities:

CESA Terminal: One silo with a capacity of 55,000 tons used for grain and soya beans. Conveyors feed two pneumatic chutes, each 150 t.p.h. The facility is being improved to handle 1,000 t.p.h.

Port-owned Terminal: Two silos with a total capacity of 70,000 tons. Loading is carried out by a single retractable arm, max. reach 20 m. Average loading rate 1,500 t.p.h.

Samrig Terminal: One silo with a capacity of 35,000 tons. Loading is carried out by two movable chutes each with a capacity of 200 t.p.h.

At other berths loading is carried out by portable equipment.

Cotrijui Grain Terminal: At Rio Grande Superport. Consists of a T-shaped jetty, 170 m. long. It has 8 loading tubes in 2 banks of 4 fed from overhead belts. Loading rate 1,000 t.p.h. for each bank of tubes. Depth 55 ft. Max. LOA 180 m. Max. draft 48 ft.

Soya Bean Oil can also be loaded here at 500 t.p.h. through a 12 in. pipe-line. The innerside of the T jetty can accommodate barges to further increase the loading rate if required.

The terminal gives preference to self trimming vessels and bulk carriers.

The Luchsuper Fertilizer Terminal: has a T-shaped jetty, 130m. long. Depth 50 ft. It can handle Urea, Phosphoric Acid, Ammonia and Sulphuric Acid at 500 t.p.h. Bulk chemicals can be discharged here with two 6 ton Portal cranes. Two container berths are in the latter stages of completion.

The Superport will eventually cover 8 km. along the waterfront with provision made to handle fuel, chemicals, oils, salt, fertilisers, minerals, containers and roll-on/roll-off traffic. Four of the new 20 berths are in operation.

STEVEDORES: Working hours, straight time, 0730/1130 – 1300/1700 (week-days). During week-days, labour for morning shift which commences at 0730 hrs., may be ordered up to 0715 hrs.; at 1245 hrs. extra gangs may, if necessary, be engaged for afternoon shift commencing at 1300 hrs. For night work longshoremen (i.e. dock labourers as distinct from stevedores) must be ordered before 1600 hrs.; stevedores, tally-clerks, etc., for night work may be engaged up to 1845 hrs. for shift that starts at 1900 hrs. Sunday/holiday work must be ordered previous day, up to 1000 hrs.

MEDICAL: Two hospitals available which have adequate facilities to deal with majority of cases. Only vaccination required at present is against smallpox.

FRESH WATER: Supplied at main quay at a rate of 10 to 15 t.p.h. or at tanker pier where rate is about 25 to 30 t.p.h. Port has a barge *Gutemberg* which can supply water (100 t.p.h.). It is only used in extreme cases where no other supply is feasible, as cost is high due to high overtime rates and tugs standing-by during whole operation.

FUEL: Bunkers may be supplied by Esso, Shell or Petrobras at tanker pier at a rate of up to 300 t.p.h. Same has to be previously stemmed aboard and supply is only effected when confirmation of stem is received. Cost varies according international demand. Barges for supply at roads are sometimes on hand. Also see "General" before first port.

DEVELOPMENTS: Dredging continues to a depth of 14 m. at the entrance and 13 m. in the inner channel.

GANGWAY/DECK WATCHMEN: Gangway watchman is compulsory. It is advisable to use deck watchman when pilferable cargo is accessible. The rate is 50% higher than that for a gangway watchman.

OPENING/CLOSING HATCHES: Opening and closing of conventional hatches normally done by stevedores, without any extra cost; advisable, however, for steel hatches to be handled by crew.

CUSTOMS ALLOWANCES: Each Crew member allowed one carton cigarettes (or the equivalent in pipe tobacco) and one bottle of spirits, per week. Ships that remain in port for over a week may request Customs, through their Agent, to open bond for another weekly issue.

IDENTITY CARDS: Foreign Crew members not permitted to go ashore without presentation of identity card, on which is a photograph of holder and personal details. These cards are provided by the Agent upon arrival. The Identity card must be delivered on disembarkation to the Federal Police who will return it to the Crew member on re-embarkation.

CONSULS/VICE-CONSULS:

Britain	Tel.	2.3303	Norway	Tel.	2.1611
Denmark	"	2.3011	Portugal	,,	2.3978
Italy	"	2.2362	Spain	,,	2.2621
Netherlands	,,	2.3303	Uruguay	,,	2.2953

REPAIRS: Two small repair shops equipped to carry out minor repairs. No dry docks. Radio, radar and gyro technicians available but expensive.

REPATRIATION: Seamen rejoining their ships or being repatriated have to proceed to Porto Alegre, by bus, where arrangements can be made for embarkation by air.

TIME: GMT minus 3 hours, except during the period 1st December to the last day of February (Brazilian Summer time) when the difference is 2 hours.

HOLIDAYS: National: 1st January*; 21st April; 1st May*; 7th September*; 15th November; 25th December*. Municipal: 2nd February; Good Friday*; Corpus Christi; 29th June.

Note: Days marked (*) no labour available.

POLICE/AMBULANCE/FIRE: Police 2.1695; Hospitals 2.3802; Ambulance 2.3801 Fire 2.1778.

TELEPHONES: There are no facilities for placing telephones on board.

GENERAL: *Flags to be flown.*

(a) Brazilian flag at the top of the foremast.

(b) Yellow flag (to be hoisted until the doctor's clearance is given).

Vessels arriving from a Brazilian port, with no disembarking passengers, must *not* hoist yellow flag unless there is sickness on board requiring presence of the Health Authorities.

(c) Pilot flag.

(d) Customs flag (to be hoisted after the vessel is cleared by Customs and flown during the vessel's stay in port).

AUTHORITY: Port Captain.

SALVADOR (Bahia): 12.58 S. 38.31 W.

(See Plan Book)

DOCUMENTS: (See "General" before first port.)

Agent also fills out the "Entrada & Saida Capitania do porto" to be signed by Captain. The particulars for this document are:

Name of Captain – name of ship – flag – code signal letters – tonnage: gross and net – horsepower – engines: twin or single – type of ship, etc. – port of registry – tons of cargo to discharge – owners – Agents in port – last port of call – previous ports of call – next port of call – number of crew – number of disembarking passengers – number of transit passengers – speed of vessel – also specifications of nature and quantity of cargo in transit.

Documents to be supplied to the Ship before departure.

1 "Clearing pass" from the Port Captain
1 ,, ,, ,, ,, Federal Police
1 ,, ,, ,, ,, Post Office
1 ,, ,, ,, ,, Custom House
1 Custom House negative cargo declaration for each following Brazilian port of call.

The Port Doctor will require the following information: Class, name and flag of ship – net register tonnage – name of Master and ship's Doctor – number of officers and crew – name of Agent – all ports called at during voyage – number of days from first to previous ports of call – number of passengers disembarking and in transit – tons of cargo to be discharged – whether any sick persons or deaths occurring on board.

The Customs will require the following information: Name of vessel – nationality – gross and net tonnage – H.P. of engines – name of Captain – number of officers and crew – owner's name – name of Agent – all ports called at during voyage – ports of destination – days of voyage from first to previous ports of call – tons of cargo to be discharged – particulars of passengers.

The Federal Police require the following information: Vessel's name – nationality – gross and net tonnage – name of Captain – number of officers and crew – name of Agent – port of departure and all ports of call – number of days from first and last ports of call – number of passengers disembarking and in transit – specification of embarking and disembarking ports of each transit passenger.

Ships calling at Salvador are normally boarded by the authorities at any time, day or night, when required. If there is no special urgency, however, the visit is effected the following morning at 0630 hrs.

The inspection area of the Port Health Authorities, Federal Receipt and Maritime Police is defined by a radius of 1 mile around the point of co-ordinates Lat. 12° 58′ 07″ S. and Long. 38° 32′ 18″ W., the area around the point of co-ordinates Lat. 12° 55′ 56″ S. and Long. 38° 31′ 37″ W., indicated in chart 1102 of the NHD.

Vessels may only come alongside after clearance by the Federal Receipt, Port Health Authorities and Federal Police. The free anchorage coincides with the pilotage waiting area and permitted anchorage (anchorage of Monte Serrat).

PILOTAGE: Pilotage is only compulsory for tankers and vessels bound for the port of Madre Deus. The following areas are considered as pilotage zones for vessels bound for the port: Monte Serrat anchorage, the SW anchorage to the Panela bank and waiting and disembarking point for Pilots, shown on NHD chart 1102.

Also considered as pilotage area is all the internal area of the Bay of Todos os Santos (All Saints) to the North of the parallel passing through Monte Serrat. The area of the port of Salvador, inside the breakwater, is considered to be a compulsory pilotage area for vessels over 4,500 d.w.t.

Also considered to be an area of compulsory pilotage is all the zone North of parallel 12° 55′ 05″ S., which passes through Monte Serrat, for vessels over 3,000 d.w.t., bound for the terminal ports and their access channels inside the Bay of Todos os Santos. Request for Pilot can be made through the ship's Agent, 2 hours in advance, specifying the time of entry of the vessel and from which point pilotage will be required.

The Salvador Pilots' Association has VHF-FM radio, at their office and on board the Pilot launch, operating on Channels 16 and 11, listening out on Channel 16.

The address of the Pilots' Association is: Rua da Grecia No. 8, Tel. 242-2221, Edificio Serra da Raiz, 5th floor, room 510.

Vessels should use the signal "HOTEL" to call up the Pilot at the Pilot station (Chart 1102) and may use an audible signal for this purpose.

The Amaralina (ERA) radio station maintains coastal communication, and can also be used to call the Pilot by vessels bound for Salvador. Amaralina radio station communicates with the Pilots by telephone.

APPROACHES: *Access Channel:* There are 2 accesses to the port. The North channel, the main one with the greatest depth, starts at a point Lat. 12° 58′ S. and Long. 38° 32′ 04″ W.; it reaches the manoeuvring area passing to the North of the North breakwater, and is 400 m. long.

The South channel, starts from the Southern buoy of Panela Bank as far as the entrance between the North and South breakwaters, where it reaches the port manoeuvring area. Vessels are not permitted to cross the bars formed by the breakwaters, vessels leaving port having priority.

Action of Tides: Tidal amplitude in the port of Salvador is 2.5 m. on average, during the tides at the full moon. The flood tide in the port of Salvador runs for 5 hours to the N.N.E. and the ebb for 7 hours to the S.S.W., with a speed of 1.5 knots. During Spring tides, these tides can reach 2 to 3 knots.

During ebb tides, it is suggested that the approach to the quay be made by the South entrance, between the 2 breakwaters, so that there will be no need for a yaw action in the manoeuvring bay formed by the breakwaters. The ebb tide may cause the vessel to swing to the South, in the entrance between the breakwaters.

Manoeuvring Area: The area intended for the manoeuvring of vessels for mooring or unmooring has a length of 100 m. along the whole extension of the quay, with a draft of 27 ft. at any state of tide. In this area, and also in the access channel the anchorage of any vessel is expressly prohibited, except with the prior permission of the Port Captaincy.

ANCHORAGES: There are 3 anchorages for waiting and inspection, see Chart 1102 of the NHD.

South: To the South of Panela Bank, in position Lat. 12° 58′ 00″ S. and Long. 38° 32′ 33″ W. for waiting for the Pilot.

North: In the vicinity of position Lat. 12° 56′ 01″ S. and Long. 38° 31′ 06″ W. In the vicinity of position Lat. 12° 57′ 01″ S. and Long. 38° 41′ 01″ W.

There is a special anchorage for LASH vessels and for the operation of loading and unloading barges. It is located on the alignment of the North light of the North breakwater and the Monte Serrat lighthouse, at a distance of 0.8 miles from this lighthouse, as shown on Chart 1102 of the NHD, in note (1).

Inside the breakwater and to the South of Fort Sao Marcelo there is an exclusive anchorage for the mooring of LASH vessel barges.

PROHIBITED ANCHORAGE: Locations prohibited for anchorage and movement of foreign and national pleasure craft. Mooring and anchorage locations:

a) Bahia Yacht Club (Chart 1102)
   Lat. 12° 59′ 49″ S. Long. 38° 32′ 00″ W.
b) Aratu Yacht Club (Chart 1103)
   Lat. 12° 48′ 36″ S. Long. 38° 28′ 49″ W.
c) Area of the Bay of Itapagipe (Chart 1110).
d) Section included between the prohibited anchorage area and the LASH barge anchorage (Chart 1102), unless duly authorised by the CPBA.

Areas where anchorage and navigation are prohibited.

a) All the area in front of Inema beach (Chart 1104).
b) Almirante Alves Camara Terminal (Chart 1105).
c) Manoeuvring bay for the quay at the port of Salvador (Chart 1102), port of Aratu (Chart 1103), Terminal of USIBA (Chart 1103), Dow Chemicals (Chart 1103), (only navigation prohibited.)
d) D. Joao Oilfield – location designation in Caution B of Chart 1110.

RESTRICTIONS: There is sufficient depth of water in the outer anchorage to accommodate the largest vessels afloat with safety, and the anchorage can, in addition, take a considerable number of vessels at any one time. The average depth of water in the channel leading to the dock warehouses is 33 ft. (10 m.) except opposite Shed No. 2 where 28 ft. (8.50 m.) is the max. depth. The dock quays are sheltered by 2 breakwaters, 1 running parallel with the shore for just over half a mile. Because of the shallow draft opposite No. 2 Shed, all vessels entering or leaving the port with more than 28 ft. normally enter the Northern Channel.

MAX. SIZE: *Limit of size of vessels navigating in the channels:* Access to Temadre: Length 250 m., draft 12.8 m., beam 40 m.; Access to Dow Chemicals: Length 170 m., beam 25 m., draft 10.3 m.; Access to USIBA: Length 170 m., beam 25 m., draft 10 m.; Access to the port of Salvador: Length 180 m., beam 30 m., draft 10 m.

Also see "Berthing" and "Tankers".

ARRIVAL INFORMATION: Required before vessel's arrival:

(a) Vessel – ETA; deepest draft.
(b) Cargo – Quantity of cargo to be discharged and specification of hatch list.
(c) Passengers – Number of passengers disembarking.
(d) Bunkers – Quantity required.
(e) Water – Quantity required.
(f) Labour – Quantity required.
(g) Any other information – Number of mailbags to be landed, etc.

Specimen of telegram to be sent from previous port:

1. Vessel's name.
2. ETA Salvador.
3. Draft.
4. Number of passengers disembarking.
5. Number of mail bags to be landed.
6. Quantity of bunkers required.
7. Quantity of water required.
8. Number of gangs required.
9. Any other information.

FLAGS: On entering the port the vessel should fly the following flags:

1. Brazilian flag on fore mast top.
2. Quarantine flag when Salvador is first Brazilian port of call, or when there is a passenger for Salvador from a foreign port.
3. Customs flag (white star on blue background) after the vessel has been visited.
4. Flag "B" if dangerous cargo on board.
5. Pilot flag.

PRIORITY: Passenger vessels and wheat vessels have priority over cargo ships and the so-called "navios mixtos", i.e. cargo ships with a limited passenger accommodation. Passengers vessels are those that carry 60 or more passengers; except when loading 1,000 tons or over in which case they loose their priority.

HEALTH: The Doctor only boards the vessel when Salvador is first Brazilian port of call or when there are passengers from abroad to disembark, in which case Master should advise Agent who will then take the necessary steps required by Port Health. A yellow flag should be flown if Port Health Doctor is required on board.

RADIO: Master should always endeavour to contact Agent through Radio Amaralina coastal station, call sign ERA, and Agent will contact Master the same way. Since this station has a limited range, the Agent at Salvador may be contacted via Rio Radio when North-bound, or Olinda Radio/Fortaleza Radio when South-bound.

TUGS: Tugs are rarely used for berthing, but occasionally used for unberthing. When used, the line is supplied by vessel. Vessels unberthing at Salvador usually avail themselves of a line to a buoy. For tankers berthing at 10 m. quay, a tug is usually supplied to help vessel moor and unmoor. When coming alongside tug joins vessel inside port. 8 tugs available 120-1,688 h.p.

Rules for using tugs:

I) At Temadre and Usiba.
   All berthing and unberthing of vessels with tonnage between 2,000 g.r.t. and 10,000 g.r.t. must be with the aid of 2 tugs. Vessels with gross tonnage between 10,000 and 50,000 g.r.t. must be assisted by 2 tugs of power above 1,000 h.p. Vessels over 50,000 g.r.t. must be assisted by 3 tugs of power greater than 1,000 h.p.
II) In the port of Salvador and other marine terminals.
   All manoeuvres of berthing and unberthing of vessels with gross tonnage between 2,000 and 10,000 g.r.t. must be assisted by 2 port tugs. All manoeuvres of vessels of gross tonnage above 10,000 g.r.t. must be aided by 3 port tugs. Vessels of tonnage less than 2,000 g.r.t., according to the Pilot's judgment, may use a port tug, in special situations. In special situations, with winds from the East, according to the judgement of the Pilot, the use of tugs can be dispensed with for unberthing.

BERTHING: No restrictions, but if draft over 28 ft. berthing and unberthing take place from 1 hour before HW until 1 hour after HW. Anchor used for berthing. Tankers at 10 m. quay may unberth at any time, but Pilots usually refuse to berth during hours of darkness because of the bad lighting on this length of quays.

The wharf at Bahia is protected by 2 breakwaters. There are two channels for vessels entering and leaving. On the wharf there are 11 sheds and between some of the sheds sheltered storage spaces.

Heavy lifts are left on the wharf until taken delivery, or discharged directly to trucks.

The sheds are as follows:

	Length (m.)	Depth (m.)	Max. draft. (ft.)
Coasting Quay	450	8	23.5
Deepsea Quay	1,750	8 – warehouse 5 & 6	23.5
		10 – warehouse 7 & marine station	32.0
Inflammable Quay	300	10	
Intermediary Quay	220	8.5	

All warehouses (excl. No. 11) are fitted with overhead internal cranes.

There is also a length of quay (commonly called 10 m. quay – depth 31 ft.) on which there is no shed or equipment for the handling of general cargo. There are, however, 2 conveyor belt systems for loading magnesite and chrome concentrate. This quay is also used for loading other bulk ores with buckets, refrigerated meat, discharging sulphur and other bulk cargoes.

Explosives would be discharged into lighters at the proper anchorage for discharge of such cargo and taken to special deposits. Forewarning must be given for this cargo in order that arrangements may be made in advance.

Coal/coke are discharged directly to trucks at any of the warehouses.

All other goods are loaded/discharged at the wharf.

CRANES: 17×3.2 tons
6×1.5 tons
4×3 tons
2× 5 tons
4×6.3 tons
4×12.5 tons
1×13.5 tons (mobile)
1×30 tons (mobile)
1×75 tons (mobile)
1×35 tons (container stacker)

STEVEDORES: The Agents at Salvador act as stevedores.

The work at Salvador, especially loading, is considered amongst the best in Brazil, as a rule, sufficient gangs are available.

Masks, gloves are supplied by the stevedores. All other material such as slings, nets, etc., shall be supplied by the vessel.

The ordinary working hours are 0700–1100, 1300–1700 hrs., Mondays to Saturdays incl.

For overtime work, permission must be obtained in writing from the Customs and Rural Department. As it would be difficult to obtain permission before each overtime period, a general permission covering ship's stay in port shall be obtained prior to arrival.

1100–1300 hrs. Special permission must be obtained from the Dock Company which is only given to passenger vessels, or for cargo vessels to finish the cargo, or under special circumstances.

1700–1900 hrs. Continuation period. Advice must be given to workmen at 1645 hrs.

1900–2300, 0000–0400 hrs. Considered as night work. Advice must be given to the Dock Company at 1645 hrs. and to the stevedores at 1700 hrs.

2300–2400 hrs. same as 1100–1300 period.

0400–0600 hrs. Continuation period. Advice must be given to workmen at 0345 hrs.

0600–0700 hrs. Second night continuation period. Can be worked under special circumstances to finish the cargo. Vessels discharging/loading bulk cargoes, or loading/discharging reefer cargo, are allowed to work round the clock.

To work on holidays, advice must be given to the Dock Co. before 1700 hrs. the previous working day. For Sunday work advice must be given before 1100 hrs. on Saturday. The same applies for stevedores/tally/coopers.

CARGO INFORMATION: *Inward cargo.* When cargo is discharged from the vessel it is checked, weighed and weight noted by the shore tally-clerk (for account of the ship), by the Dock Company tally-clerk and by the Custom House. If there is a difference in weight, the ship is held responsible and has to pay double duty on same. Once the goods have been checked and weighed ship's responsibility ceases.

Goods are delivered to the consignees on presentation of the bill of lading to the Dock Warehouse.

Transhipment cargo. Foreign cargo for transhipment at Salvador must be so declared on the manifest, and after it has been discharged the Agents have to obtain special Customs permission to tranship it to the port destination and also sign a guarantee that the goods are going to that port and that duty will be paid there. They will be held responsible for that duty until a declaration issued by the Custom House at the port of destination is received by them and handed over to the local Customs.

Transhipment charges vary considerably with the type of cargo and are very high compared with foreign freights.

Outward cargo. Generally, cargo to be loaded is deposited in the dock shed prior to vessel's arrival.

Refrigerated cargo. All reefer cargo is discharged directly to trucks, and vice versa.

Dangerous cargo. Vessels with explosives and inflammables on board are not permitted to come alongside. All vessels carrying this kind of cargo must fly the "B" signal and remain at the proper anchorage. Advance notice must always be given of any vessel carrying explosives and inflammables. Under special circumstances it may be arranged for vessels to come alongside if they only have a minimum quantity of dangerous cargo on board, and the hatch in which it is stowed is not to be opened at Salvador.

When vessels are boarded by the harbour officials, the Master must hand to the Customs Officer and the Federal Police the Dangerous Cargo List.

Corpses as cargo. Notice should be given to the Port Authorities of such cargo carried, if possible, before vessel's arrival.

Vegetable oil in bulk. Vegetable oil in bulk is loaded directly from lighters where the oil is deposited prior to vessel's arrival. Vessels are usually required to supply steam for pumping when they can.

Loading and discharging rate. The average rate for loading bagged and baled cargo is 16–20 tons per gang per hour. (Tobacco has been loaded at 28 tons and cocoa at 30 tons per gang hour). Discharging rate of general bagged cargo is about 10 tons per gang hour.

Heavy lifts. For heavy lifts of more than 3 tons, a request shall be made to the Dock Co. to use the 80-ton capacity floating crane. Heavy lifts may also be discharged directly to the quay with the vessel's own gear when, due to a light draft (under 24 ft.), they can come directly alongside without the use of a pontoon. It is recommended that the Agent be consulted before booking any heavy lifts for Salvador as the heavy lift crane is sometimes out of working order.

Inflammables, fuel, & diesel oil, etc., as cargo. Bulk crude oil, diesel, fuel, inflammables, lubricants, etc., are discharged at the Madre de Deus Terminal, which belongs to the Government owned Petrobras.

Damaged cargo. When cargo is discharged, damaged or pilfered, it is immediately checked and weighed by the Dock Co. and the Customs and separately stored.

The Insurance Co. makes a survey in the presence of the Dock Co. upon request of consignees.

Bulk wheat is discharged to two mills at Salvador, namely the "Moinho Salvador" and "Moinho da Bahia". Average discharging rates (23 hrs. work per day) are respectively 1,500 and 800 tons.

Handling of mail. Timely notice should be given to the Agents in case there is mail to be landed, stating the number of bags.

As regards outgoing mail the Agents will be advised by the Post Office if there is any and issue the Post Office Pass. The bags shall be placed at the quayside, loading being for the account of the ship.

MEDICAL: When vessels arrive over week-ends or during holidays advisable that Master cable Agent giving advance notice of medical attention required if case is serious. For routine medical attention no previous advice required as ample medical and hospital facilities available.

TANKERS: All tankers loading/discharging inflammables, lubricants, etc., must do so at the Madre de Deus Terminal, which is privately owned by Petrobras, the Brazilian Government-run oil company.

The Madre de Deus Terminal is a T-fashioned quay situated within All Saint's Bay, 18 miles from Salvador. All vessels calling at Madre de Deus must be cleared at Salvador where Agent and authorities board the vessel before proceeding to Madre de Deus. This terminal is equipped only to handle tankers. Water, bunkers and deballasting facilities are available.

Max. drafts are 41 ft. for vessels loading and 37 ft. for discharging, and length 240 m.

Five berths are available, pipe-line is 12 in.

PP1. Max. size 65,000 d.w.t. Depth 13 m.
PP2. Max. size 53,000 d.w.t. Depth 13 m.
PP3. Max. size 16,000 d.w.t. Depth 13 m.

These 3 berths can load or discharge both Crudes, White oils and Products. They are all fitted with deballasting facilities.

PS1. Max. size 4,000 d.w.t. Depth 7.5 m.
PS2. Max. size 2,000 d.w.t. Depth 5 m.

DENSITY: Salt water.

FRESH WATER: Advance information recommended. Rate 15 t.p.h. If several vessels are in need of supply, pressure may not be enough to supply all at once. No water barges available in the port, and all vessels are replenished alongside.

FUEL: Diesel oil can be supplied alongside at Salvador, directly from trucks to vessel, but fuel oil can only be supplied by Petrobras at the Madre de Deus Terminal, 18 miles up the bay.

Lubricants are supplied in drums. Also see "General" before first port.

DEVELOPMENTS: A cereals suction plant to be installed by February, 1979. Equipment to include ore suction tower 150 t.p.h. and 2 portable suction units 60 t.p.h. each.

GANGWAY/DECK WATCHMEN: All foreign vessels must employ a gangway watchman by law. Hold watchmen are optional, depending on request by Masters/Agents.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CUSTOMS ALLOWANCES: Customs officials will place cigarettes and "souvenirs" belonging to crew members under lock and seal. Excepting the Captain, each crew member may keep in his possession only 1 carton of cigarettes and 1 bottle of spirits with seal broken. The Customs will periodically renew the seals for vessels staying in the port for a lengthy period thus enabling new issues to crew.

LIGHTERS: Soc. Alvarengagem de Ilheus are operating 4 lighters in the port with a combined capacity for about 670 tons.

CONSULS:

Argentine
Austria
Belgium
Bolivia
Denmark
France
Germany
Italy
Mexico
Netherlands
Nicaragua
Norway
Portugal
Spain
Sweden
Switzerland
U.S.A.
Uruguay

REPAIRS: The Navy operates a dry dock at Aratu with the following capacity: 35,000 tons; length 230 m.; width 30 m.; depth 8.5 m. Various small vessels can be attended at the same time. There are a number of workshops in Bahia fitted for repairing vessels, but it is recommended that large repairs be effected at the Aratu dry dock. When time allows, repairs may be made whilst the vessel is alongside the wharf. There is no time-limit but, as a rule, a vessel is not supposed to remain idle at the wharf if the berth is needed for another vessel which has to load/discharge.

SURVEYORS: *Lloyd's Agent:* Cory Brothers & Co. Ltd., Avenida Estados Unidos 4 11° andar. Telephone 22858 and 22848.

Bureau Veritas: Harold Taxman, Tel. 20447.

American Bureau of Shipping: Harold Taxman, Tel. 20447.

REPATRIATION: All crew changes and repatriations made via Rio de Janeiro as Salvador has no direct air connections with foreign countries.

AIRPORT: Airport is 31 kms. from centre of town. No direct flights to foreign countries but various daily connections available with Rio, S. Paulo, etc.

TIME: GMT minus 3 hours. From December 1st until March 31st all clocks are advanced 1 hour for Summer time.

HOLIDAYS: *1st January; 6th January; 7th February; *24th March; 21st April; *1st May; 25th May; 24th June; 2nd July; 15th August; 7th September; 2nd November; 15th November; 8th December; *25th December.

*Stevedoring labour always available but dock labour is not on the days indicated above.

POLICE/AMBULANCE/FIRE: Fire Tel. 193; Police Tel. 190.

TELEPHONES: Facilities available for placing telephones on board.

REGULATIONS: Rat-guards must be used at all times, as the Port Health make periodic inspections on the quay.

STORES: Ship chandler can supply meat, vegetables, tropical fruits, canned goods, etc., but no bonded stores for foreign goods available.

AUTHORITY: Capitao dos Portos. Capitania dos Portos do Estado da Bahia.

SANTANA: 00.03 S. 51.11 W. (See Plan Book)

DOCUMENTS: Also see "General" before first port.

6 Crews lists.
3 Crew personal effects lists.
7 Transit passengers list or negative passengers list.
3 (each) Stores lists (Engine, deck subsistence and bonded).
5 Cargo manifest or ballast declaration.
7 Disembarking passengers list (if any).

3 Maritime Health certificate.
3 Vaccination list.
Deratization certificate.
Maritime police pass (when proceeding from Brazilian Ports).
Clearance certificate.

PILOTAGE: No Pilots available either for the North Channel entrance and/or for docking and casting off operations.

ANCHORAGE: In front of the port, protected anchorage between mainland and Santana Island, where vessels can safely anchor at any location. Bottom is mud.

RIVER NAVIGATION: Outer bar transit restricted to 32 ft. at LW and 37 ft. at HW. When loaded and outward bound, the Master should study carefully the tides and direction of currents.

RESTRICTIONS: Vessels can depart at any stage of tide. Night transit in North Channel is at Master's discretion.

Channel transit restricted to 32 ft. in low water. Due to shifting of mud banks it is recommended that a set of up-to-date Brazilian nautical charts, covering from outer bar to Santana Port, should be used.

The Hydrographic Office charts No. 40, 210, 201, 202, 203, 204, 205 and 206 are used by mariners to navigate the North channel of Amazon River from the open sea to Porto de Santana.

All depths printed on Brazilian charts are in metres and refers to average Spring LW tide.

The Hydrographic Office of The Brazilian Navy, based on date furnished by the Brazilian National Astronomical Observatory, publishes an annual tide table for the majority of Brazilian ports, including Barra Norte do Rio Amazonas –Ilha do Brigue – Lat. 00° 55′ N. Long. 50° 05′ W. and Porto de Santana.

Nautical charts and tide tables are available through the vessel's Belem (Para) Agent.

In certain periods, but mainly from April to August, there are large logs, trees, etc., drifting down river.

MAX. SIZE: On East side of floating ore pier, general cargo pier has a depth alongside of 29 ft. Along floating ore pier depth ranges from 35 to 90 ft. (at LW). 35 ft. on East end of pier. Tidal range about 9 to 11 ft. Tidal current at middle of river ranges from 2 to 3 knots, while close inshore along ore dock it runs approximately 1-1.5 knots. Amazon river water at Santana is fresh in spite of tides.

Port of Santana: Alongside the floating ore pier, the tidal current continues to run for 60 minutes beyond the time computed from the table. In mid-stream, the delay in the change of current is 90 minutes, depending on the river flow.

HEALTH: Health authorities visit vessel arriving from abroad. Authorities require regular ship's gangway to be lowered. Jacob's ladders not accepted. Also see "General" before first port.

RADIO: Vessels scheduled to load ore at Santana must radio Belem (Para) Agents (preferably via Chatham, Amagansett or Belem Radio) at least 48 hours prior to ETA North Channel. Other means of communication not satisfactory and result in delay.

TUGS: No tugs available.

BERTHING: *Private Floating pier:* Length 247 m. Depth of water 10.6 m. A retractable loading arm loads Manganese at an effective average loading rate of 1,000 long tons per hour for each hatch loaded.

Macapa pierhead: Length 18 m. Depth of water 8.8 m. Fitted with a 65 ton crane, and used for general cargo handling.

Recommended that amidship hatches be used for Santana cargo. Vessels berth according to direction of tidal current. Berthing operations assisted by a motor craft to place lines on shore, East of pier. On West side, lines moored to the bitts on floating fender. Linesmen available to assist berthing and shifting. Ore carriers have preference when docking.

When berthing, use of the anchor must be avoided except in an emergency.

STEVEDORES: Stevedores are available at Macapa about 25 km. by road from the port. Rates and other pertinent details must be arranged through the ship's Agents. Conveyor belt for ore loading fixed, consequently vessels must be shifted by own winches to load various hatches. Effective average loading rate 1,000 t.p.h. Special caution must be taken not to pump all ship's ballast before loading starts, since the height of boom is 40 ft. above water level. Cargo belt trimmed only.

MEDICAL: Medical attention may be arranged at Macapa through ship's Agent.

TANKERS: Discharge at the Dolphins Pier, about 150 m. West of floating pier. Pipe-lines lead to tanks ashore (distance from pier 1,000 m.). Storage tanks have capacities for 35,000 barrels of diesel oil, 9,500 barrels of gasoline and 60,000 barrels of fuel oil. There are no shore facilities available at the terminal for receiving slops, dirty or contaminated ballast. Masters are cautioned that discharging of anything other than uncontaminated ballast will be subject to penalties as prescribed by Brazilian law.

(See Pollution Regulations in "General" before first port).

DENSITY: The Amazon river water at Santana Port is fresh water at any stage of tide. Checking density during load operations is recommended.

FRESH WATER: No drinking water available.

FUEL: There is no suitable installation for fuel supply. See "General" before first port.

GANGWAY/DECK WATCHMEN: Watch by Crew members sufficient.

OPENING/CLOSING HATCHES: Ore-carriers: service carried out by crew. General cargo vessels: service executed by stevedores.

CUSTOMS ALLOWANCES: Limited quantity for use during ship's stay.

CARGO GEAR: No additional requirements as to gear. A heavy-lift stiff leg derrick mounted on the pier. Boom: 60 ft., Mast: 37 ft. 6 in., Capacity: 65 metric tons. Mobile crane (maximum lift 40 metric tons) available for discharge of general cargo from small vessels.

IDENTITY CARDS: Foreign Crew members not permitted to go ashore without presentation of identity card, on which is a photograph of holder and personal details. These cards are provided by the Agent upon arrival. The identity card must be delivered on dis-embarkation to the Federal Police who will return it to the Crew member on re-embarkation.

CONSULS: None. Documents which are to be visaed by a Consul must be sent to Belem.

REPAIRS: Only in cases of extreme emergency and then only minor repairs.

REPATRIATION: Effected by ship's Agent. No Immigration authorities at Macapa.

AIRPORT: Macapa airport 25 km. from Santana near city of Macapa. Scheduled domestic flights from Belem to Macapa, a trip of 25 mins.

TIME: GMT minus 3 hours.

HOLIDAYS: New Year's Day (January 1st); Tiradentes (April 21st); Martyr of Independence; Labour Day (May 1st); Independence Day (September 7th); All Saints' Day (November 2nd); Proclamation of the Republic (15th November); Christmas Day (December 25th).

TELEPHONES: No facilities for placing telephones on board.

GENERAL:

Aids to Navigation – Radio Beacon – A radio beacon is installed at Ponta do Ceu, marking the entrance from the open sea to the river proper. It is operated by the Brazilian Hydrographic Office and the main details are:

Frequency	– 290 kHz
Signal letter	– EH
Working hours	– Continuous
Geographical position	– Lat. 00° 45′ 40″ N. Long. 50° 06′ 58″ W.
Range	– 300 miles.
Signal	– A0 and A2 (1020 H2)
Character of signal	– (EH.....) Twice in A0 during 10 secs. and A2 (1020 H2) during 5 secs.

Vessels have reported that certain times the beam may stray as much as 15°/20°. This straying is most noticeable during early evening and at dawn, less so during the night, and least during the daytime hours.

Industria e Comercio de Minerios S.A. – ICOMI is not responsible for the location and operation of the various aids to navigation (lights, radio beacon, buoys, etc.).

COMMUNICATION: *Notices* – Vessels scheduled to load ore at Porto de Santana, must send radio to Belem (Para) Agents (preferably via Chatham, Amagansett or Belem Radio) at least 48 hours prior to their ETA North channel. Agents forward this information via telephone to their representative in Macapa who notify the shippers.

Telephone – Telephone communications between Porto de Santana and all Brazilian cities and also international calls, via Embratel (Brazilian Telecommunication Company) are possible every day, Sundays and holidays included.

Telegraph – There is a public telegraph service in Macapa, operated by the Brazilian Post Office and Telegraph Department.

Cable – International Cables are speeded by phoning them to the Agents in Belem (Para) who file them in the local cable offices there.

Mail – Ship's or crew's mail should be addressed in care of the ship Agents in Belem (Para). Mail should not be addressed to Macapa or to Santana.

POLLUTION REGULATIONS: Brazilian Legislation contains several sanctions and penalties applicable to those who cause pollution of any kind. The prohibition against the execution of acts which cause pollution and the respective penalties, both administrative and pecuniary, are principally contained in The Federal Law No. 5318, dated 26/9/67, and in the National Policy for Sanitation, in the Decree No. 221, dated 20/2/67 – Fishing Code, in the Federal Decree 5798, dated 11/6/40, on Rulings for Maritime Traffic, and in the State Law (State of Rio de Janeiro) No. 6753, dated 10/12/71.

The sanctions and penalties can be applied cumulatively against infractors, and among those, special attention is called to the penalties foreseen in Federal Law No. 5357, 17/11/67, of which the first article reads:

> "Article 1 – Vessels or maritime or river terminals of any kind, foreign or national, which discharge debris or oil in waters which are within a strip of 6 (six) nautical miles from the Brazilian coast, or in rivers, lakes or other stretches of water, will be subject to the following penalties:
>
> (a) vessels, to the fine of 2% (two per cent) of the greatest minimum salary in force in the national territory, per gross register ton or fraction thereof:
> (b) maritime or river terminals, to a fine of 200 (two hundred) times the greatest minimum salary in force in the national territory.
>
> Sole paragraph – in the case of repetition the fine will be applicable in double".

In addition to the administrative and pecuniary penalties, under the new Brazilian Criminal Code, (Decree-Law No. 1004 of October 21, 1969, which was put in effect as of January 1, 1974, according to

Law 5857/72, acts causing pollution constitute a violation punishable with imprisonment as follows:

"Article 303 – Pollute lakes and rivers or, in inhabited places, the shores and the atmosphere, thus breaching provisions of federal laws or regulations:

Penalty – Imprisonment up to 3 (three) years and payment of a 5 to 25 day fine.

Sole paragraph – If the crime is not wilful the penalty shall be imprisonment from 2 months to 1 (one) year".

AUTHORITY: Industria e Comercio de Minerios S.A.-Icomi.

SANTEREM: 02.25 S. 54.43 W.

Also see "General" before first port.

Santerem is located on the right bank of the Tapajos River which joins the Amazon River.

BERTHING: 520 m. of quay of which 380 m. is a pier, 2 warehouses with an area of 3,000 cu.m., open air area of 10,000 sq.m.; mechanical workshop, 60 ton weighbridge, administrative building, water tower and residence for the Port Administrator.

2 deep sea vessels or larger coasters can come alongside, with a minimum of 10 m. depth of water, and at the same time, 2 vessels of lesser draft can be berthed in the inner area where the depth is 6 m.

To handle river vessels, there is a marginal quay, with a minimum depth of 3 m.

There are at present two 6 ton cranes, with plans to install a further four.

The principal export is meat which is delivered by road. A cold store is to be built.

FUEL: Fuel oil available at Petroleo Sabba private wharf. Also see "General" before first port.

AUTHORITY: Companhia Docas do Para.

SANTOS: 23.56 S 46.19 W. (See Plan Book)

PORT LIMITS: The port of Santos is situated in the centre of the State of Sao Paulo, and the port installations spread over an estuary bounded by the islands of Sao Vicente and Santo Amaro.

The port limits are:–

(a) Parallel alignment of 24° 02.7′ S., in the limits Morro do Munduba (Munduba Hill) and Ponta do Itaipu (Itaipu Point);
(b) Mar pequeno;
(c) Channel of the port of Santos;
(d) Piacaguera Channel;

DOCUMENTS:
The following documents, etc., are required to be presented to the authorities upon ship's arrival.

To Port Health Authorities:

1 Crew List
1 Free Pratique Certificate from the first Brazilian port of call, if any.
1 Maritime Declaration of Health (only at the first Brazilian port).
Deratization Certificate.

To Federal Revenue Bureau (Custom House):

Envelopes addressed to the Federal Revenue Bureau containing a cargo manifest and copies of Bills of Lading covering cargo loaded at foreign ports, or a negative manifest if no cargo loaded for Santos. Envelopes for the Federal Revenue Bureau – from Federal Revenue Bureau's Delegates of every Brazilian intermediate port of call following the same procedure. Tankers are permitted to bring bulk petroleum products on 1 manifest "for Brazil", although cargo may eventually be discharged at 1 or more Brazilian ports. In the latter case, the original manifest is visaed by the Federal Revenue Bureau at each discharging port, is kept on board and delivered to the Federal Revenue Bureau at the last discharging port.

3 Crew Lists.
3 Store Lists (Deck, Engines, Cabin, etc.)
3 Lists covering Crew's belonging.
1 Copy of each of the above Lists duly visaed by the Federal Revenue Bureau of the previous Brazilian port of call, if any.
Federal Revenue Bureau's Pass from the last Brazilian port of call, if any.
Statement of Cargo Discrepancies, also 1 List giving the name of all preceding ports of call with dates of arrival and sailing, respectively.

To Maritime Police (DOPS):

3 Crew Lists plus 1 visaed by the Maritime Police authorities of the last Brazilian port of call, if any.
2 Stowaway List and Declaration (if stowaways found on board).
1 Captain's General Information Report covering the number of passengers on board for Santos, or in transit from each foreign port of call, also the number of Crew members.
Maritime Police Pass from the last Brazilian port of call, if any.

To Port Captaincy:

Port Captaincy's Pass from the last Brazilian port of call, if any.

The Captain must also fill out an Arrival Declaration giving all data concerning his vessel as well as the number of crew, passengers on board, ports of call, cargo loaded for this port, Agents, etc.

To Post Office: Mail lists or mail passes from every port of call.

Passengers to land or in transit:

Whenever there are passengers on board, the following additional documents are required:

Passengers Disembarking:

2 Passenger Lists together with individual baggage declarations, in duplicate, for the Federal Revenue Bureau.
2 Passenger Lists for the Health Authorities.
3 Passenger Lists and Individual International Embarking/Disembarking Cards, duly filled out, for the Maritime Police.

Passengers in Transit:

2 Passengers-in-Transit Lists for the Port Health Authorities.
1 List for the Maritime Police visaed by the Maritime Police Authorities of the last Brazilian port, if any.

PILOTAGE: Pilotage is compulsory for Brazilian flag vessels of more than 500 d.w.t. and all foreign vessels, as well as tankers.

Pilots embark and disembark in the South part of the buoyed entrance channel abreast parallel 24° 00.5 S., in the proximity of Ilha das Palmas (Palmas Island). Shifting of berth alongside the quay, anchorage in the inner anchorages and other tasks requiring the shifting of vessels, should only be carried out with a Pilot on board.

When arriving, vessels may anchor in the outer anchorage without a Pilot, but should not cross the buoyed channel.

Pilot's services may be requisitioned with 2 hours notice, by telephoning the Pilotage station, telephone 36–3738, or directly by the vessels through the Estacao Costeira do Servico Movel Maritimo, Santos – Radio PPS – (Maritime Mobile Service Coastal Station) or through VHF, calling the Pilotage station on Channel 16, which maintains a permanent watch (it can also be reached through Channels 10, 11 and 13).

The Co-operative of Pilotage Services are located at Avenida Almirante Saldanha da Gama, No. 64. The Co-operative have their own boats, which are equipped with radio.

If the weather conditions prohibit the Pilot from boarding, the vessel must remain at anchor until the weather improves.

If on departure the Pilot is unable to disembark he should be landed at the next port of call.

APPROACHES: *Approach Channel:* The Approach Channel is marked on Chart 1701 of the DHN (Hydrographic Office) which contains all necessary information concerning beacons, depths and leading line lights.

As the projected depths for the sections of the channel shown in the note appearing in Chart 1701 have not yet been reached in all sections, it is important to observe the existent information given by the "Notice to Mariners"

The mean depth of Sections B and C is 11.5 m.; in Section D, Piacaguera Channel, 10 m.

Vessels drawing 36 ft. or over should be manoeuvred during HW.

In the Piacaguera Channel, Section D, due to its small width, depth and dimensions of the turning basin, the following limits of ship's characteristics should be observed:

Vessels with a length between perpendiculars from 185 m. up to 195 m.:

Maximum breadth	29 m.
Maximum draft	9 m. (HW)
	8.3. m. (LW)

Vessels with a length between perpendiculars from 195 m. to 205 m.:

Maximum breadth	29 m.
Maximum draft	8.7 m. (HW)
	8.0 m. (LW)

Vessels with a length between perpendiculars over 205 m. must not enter the channel.

Note: Vessels negotiating the Piacaguera Channel should employ two tugs, at least one with tow line held fast.

Tides and Currents: The rise and fall has a mean value of about 1.5 m.; its intensity is at Spring tides, up to 1 knot during HW and about 1.4 knots during LW.

Exact figures with respect to the range of tide rise and fall and intensity may be obtained in publications of the DHN (Hydrographic Office). Tide tables and in the table of tidal currents for the port of Santos.

ANCHORAGE: Chart 1701 of the DHN (Hydrographic Office) indicates the anchorage areas and the limitations to be observed in these areas.

Vessels with port operations to be performed, can only remain at anchor in the inner anchorage areas 1 and 2, for a period of 24 hours. Beyond what is specified above, the Ships' Masters or their representatives should obtain the required permission from the Port Captaincy.

When vessels anchor in the inner areas Nos. 1 and 2, normally only 2 cable lengths should be used. Notwithstanding, it is common in the port of Santos for strong winds to blow from N.W., causing accidents, therefore, for the sake of security in those areas, it is compulsory for vessels to maintain their engines ready in order to face any eventuality, preserving on board the necessary crew for manoeuvring.

The traffic and anchorage of vessels in the vicinity of the military fortifications of Itaipu and Guaruja (Itaipu and Andradas Fortresses) is not permitted; all craft should keep a minimum distance of 100 m. from the neighbourhood of Morro do Itaipu (Itaipu Hill) and Morro do Munduba (Munduba Hill).

RESTRICTIONS: The access channel and port area have been dredged to 13 m. and dredging will continue to a depth of 13.5 m. However, depth alongside the deepest general cargo quay does not exceed 31 ft. 6 in. at high water, and can be as low as 27–28 ft. at low water.

The maximum permitted speed in the channel is 6 knots, except in cases of justified emergency.

In the Piacaguera Channel navigation is only permitted by one vessel at a time, and during daylight only.

MAX. SIZE: Regulations in force stipulate that vessels drawing max. 28 ft. and not exceeding 750 ft. in length may enter/leave the port at any state of tide, day and night. Those drawing 28 ft./30 ft. are subject to tide. These are the official drafts for the port, however in practice, depending on tide, vessels up to 32 ft. may also enter/leave the port.

RADIO: Santos Coastal Station, VHF Channel 16. Working 24, 25, 26 and 27. S.S.B. facilities will be available at a later date.

HEALTH: Port Health Authorities consisting of one doctor and one assistant will check all vaccination certificates and issue a free pratique pass, which shall remain on board for presentation at subsequent Brazilian ports of call. Masters can obtain free pratique by radio, which does not mean that the doctor will not come on board, but only that other authorities can board the ship before his arrival.

Free pratique by radio: Master should radio to Agent (in Portuguese) as follows: "Para Sa Portos condicoes sanitarias a bordo satisfatorias" (Master's name) which means: "Sanitary conditions on board satisfactory". *N.B.* "Sa Portos" is the cable address of Port Health Authorities.

TUGS: Seven tugs available, equipped with radios (VHF Channels 10, 13 and 16). 1,000–1,680 h.p. 13 small tugs available, 250–880 h.p.

The use of two tugs or more is compulsory in the Piacaguera Channel.

Vessels should dock, preferably against the tide.

The assistance of at least two tugs will be obligatory in the following places:

Saboo Quay – Points 1, 2, 3 and 4;

Warehouses 13, 26 and 9, where the pneumatic wheat unloaders are located;

Conceicaozinha; Alemoa and Barnabe Island

Note: The power of the tugs should be in accordance with the deadweight of the vessels listed in the table for the other areas of the port.

Outside the above mentioned areas, when employing tugs, the following minimum requisites should be observed:

Vessels up to 4,000 d.w.t.	optional
Vessels from 4,001 to 6,000 d.w.t.	1 tug up to 1,000 h.p.
Vessels from 6,001 to 10,000 d.w.t.	1 tug of more than 1,000 h.p.
Vessels from 10,001 to 30,000 d.w.t.	2 tugs (one with more than 1,000 h.p.)
Vessels over 30,001 d.w.t.	2 tugs (one with more than 1,000 h.p. and 1 with more than 1,500 h.p.)

Note: Should no tug of the indicated power be available, tugs of immediately superior power should be requisitioned but the cost of attendance should be equal to that of the tug which would have been required by the above scale.

BERTHING: The length of the available quay wall is as follows:

General cargo from abroad	4,070 m.
Coastwise general cargo	246 m.
Bulk cargo: liquid	1,512 m.
Bulk cargo: solid	1,809 m.
For yachts and other small craft	462 m.

Depth alongside quays:

Warehouse	No. 1	to No. 12	– 7 m.
,,	No. 12–A	to No. 22	– 11 m.
,,	No. 24	to No. 27	– 8 m.
,,	No. 29	to No. 37	– 11 m.
,,	No. 38	to No. 39	– 13 m.

Alemoa Terminal	12 m.
Saboo Quay	10 m.
Barnabe Is. (inflammables)	10 m.
Conceicaozinha Terminal	13 m.

Wharves. Total length 6,013 m. inner Harbour (Saboo New Quay) 800 m. (depth 11 m.). Barnabe Island pier 300 m. (depth 10 m.).

Special cargo handling facilities. Refrigerated cargo: Refrigerated cargo after discharge is deposited in the cold storage (between warehouses 23 and 25). The Receiver is usually responsible for cartage and storage arrangements as well as for the required temperature to be maintained in cold chambers.

Bulk cargo. Grain elevators: There are 3 elevators in Santos from which wheat can be discharged direct into freight cars, owned by: Cia. Docas (with external silos) between Sheds 25 and 26; Moinho Paulista between Sheds 12A and 13; Moinho Santista between Sheds 8 and 9.

Cosipa Terminal, depth 10 m.; Ultrafertil Terminal, depth 10 m.

Fertiliser, sulphur, etc, in bulk can be discharged at any point along the quay where 6-ton cranes equipped with automatic motor-driven grabs or shovels are in operation. Alternatively, cranes with ordinary hand-filled buckets are used. The usual place for handling this type of cargo is by the Saboo bend.

Special/valuable cargo: Special or valuable cargo, objects of art, precious metals, etc., are discharged without special formalities and may be kept in Shed 12A, where there is a special safe.

BULK HANDLING FACILITIES: The Ultrafertil Terminal is situated East of the Cosipa Terminal and both make use of the same manoeuvring basin with depth of 10 m., connected with the Port of Santos by a dredged channel 8 km long, 10 m. in depth and 60 m. in width.

Cosipa Terminal consists of a pier 150 m. in length and 22 m. in width, built on concrete tubing, with a depth of 10 m., allowing for the berthing of vessels of up to 22,000 d.w.t. Future plans foresee the lengthening of the pier to 250 m. and a depth of 13 m., enabling it to receive vessels of 45,000 d.w.t.

Equipment for the discharge of coal and ore is installed at the pier, capable of handling 600 t.p.h., as well as equipment for the loading of steel plates produced at the plant.

Ultrafertil Terminal is an open dock in the form of an "L" built on concrete tubing, 240 m. in length and 15 m. in width. At its main point, vessels of 23,000 d.w.t. and drawing 10 m. may berth. The secondary point permits the berthing of vessels of up to 3,000 d.w.t. (liquid gas carriers).

The terminal is especially equipped for the discharge of bulk solids at a rate of 500 t.p.h. and is likewise equipped with pumps and adequate pipes for the discharge of liquified gas.

Macuco Novo Quay: Export terminal for cereals. Length 280 m. Max. draft for vessels is 13 m. Storage capacity 60,000 tons. Loading rate 3,000 t.p.h.

Container Terminal at inner part of port. Equipped with 3 heavy weight shore cranes, capacity 30 tons each. Loading/discharging rate: 20 pallets per hour, using fork lifts.

Conveyor Belts:

(a) conveyor belt for salt, in front warehouse No. 23, receiving product from the ship by means of grabs and transporting it to the mill of SALMAC S/A with capacity for 500 t.p.h.

(b) 8 conveyor belts for fertilisers at Conceicaozinha Island with variable capacity from 500 to 2,000 t.p.h., depending on the product.

Wheat Unloaders:

Pneumatic type: Capacities: 5×150 t.p.h.
2×120 t.p.h.
4× 60 t.p.h.

Location: 3 in front warehouse No. 9, of which 1×150 t.p.h. and 2×60 t.p.h.; 4 in front warehouse No. 13, of which 2×150 t.p.h. and 2×60 t.p.h.; 4 in front warehouse No. 26, of which 2×150 t.p.h. and 2×60 t.p.h.

All adequate for the discharge of wheat using conveyor belts into silos belonging to the port, or privately owned silos existent in the port area.

Roll-on/Roll-off: One ramp available.

CRANES: *Heavy lifts:* Cia Docas operates 2 floating cranes – one 250 ton and one 150 ton. The 150 ton crane reaches 22 m. in height and can handle lifts within a radius of 10 m.

Quay Cranes: 153×1.5–30 tons.

Mobile Cranes: 48×4–9 tons.

STEVEDORES: All longshoremen are in employ of Cia. Docas, which holds charter for general operations at Santos Docks. Their services can be requisitioned up to 1500 hrs. for vessels at berth/expected to berth next day. Stevedores ordered but not used shall be paid full day or night. Therefore, if the men should be kept standing by (inactive) at 0700 hrs., their period runs up to 1700 hrs., and at 1900 hrs., their period runs up to 0400 hrs.

Port Workers: In Brazilian ports there are 2 categories of workers engaged in handling cargoes in loading and/or unloading ships, namely:

Longshoreman: In the employ of Dock Company, to work ashore operating the cargo from the ship's tackles to the warehouse or to waggons, lorries, etc. as well as in the reverse operation.

Stevedores: They are called "autonomous" because they have no ties of fixed employment and they are engaged by Shipowners or their Agents to work on board the ships in loading and/or unloading operations. They are professional and qualified workers grouped in their respective syndicates or trade union.

FRESH WATER: Adequate supply of fresh water is always available from hydrants (rate 40 t.p.h. – connections 2.5 in.) along the quay (day and night) or from water-barges (Piloes). Water barges (3) cannot supply more than 2 ships per day, their capacity being only 250 tons, which can be pumped into the ship's tanks at the rate of 80 t.p.h. Cia. Docas should be advised 24 hours in advance, priority being given to passenger vessels.

FUEL: MFO, MDF, and gas oil can be supplied at Vallongo by Shed No. 1 or at the Saboo New Quay Extension, or by barge, if up to 300 tons. Applications for supplies should be made a few days in advance to avoid delay in delivery.

TANKERS: Discharge terminals at Saboo Quay, Alamoa and Ilha Barnabe.

Alemoa Terminal: Allows simultaneous mooring of 2 tankers with capacity of up to 50,000 d.w.t. Length of wharf 630 m. Depth of 12 m. at LW. Sixteen "Chiksan" arms available. Unloading rate 500–2,000 t.p.h. Distance between manifolds 180–260 in. Connections 6 in. and 8 in.

Ilha do Barnabe: Length of dock 301 m., depth 10 m. The dock is used for loading, unloading and storage of liquid fuel.

Saboo Quay: Connections – 6 in., 8 in. and 12 in.

REPAIRS/DRY DOCKS:

Shipyards: Santos Dock Company, Wilson Sons S/A, and various others for small size craft.

Repair Shops: Santos Dock Company, Wilson Sons S/A and various others for maintenance services and marine repairs such as: mechanical, boiler, electrical, electronic and refrigeration.

Drydocks: Wilson Sons S/A. With capacity for vessels of 65 m. in length, 12 m. breadth and maximum drafts of 4.20 m. aft and 3.90 m. forward.

Slipways: Santos Dock Company, with two cradles and capacity up to 300 tons with a maximum of 45 m. in length and 11 m. breadth; there also exist innumerous slipways for small size craft.

Many other repair shops and slipways of lesser capacity are available.

SURVEYORS: Practically all the Classification Societies are represented in Santos. Hold and derrick inspections as well as cargo surveys, are executed expertly, among others, by Perimar Ltd. a surveying firm which also performs testing, sampling and technical research. Its address is: Rua Amador Bueno, No. 38, conj. 91, 9th floor, P.O.B. 624, 11.100 Santos. Telephone 35.2677. Telex 013–1213. Cables: Perima Santos.

P & I Clubs: Most associations, British, Scandinavian, Polish, Japanese and Greek are represented by Pandibra Ltda. at the following address: Rua XV de Novembro 65, 8th Floor, P.O.B. 550, 11.100 Santos. Telephone Exchange No: 34.7228. Telex: 013–1248. Cables: Pandibra Santos.

WATCHMEN: Masters of vessels may at their own discretion have crew members posted as watchmen, but are strongly recommended to have shore people for the job, specially when vessel is carrying any kind of pilferable cargo.

OPENING/CLOSING HATCHES: May be performed by ship's crew or by stevedores.

CONSULS: The following countries are represented in Santos:

Italy
Denmark
Finland
Paraguay
Portugal
France
U.K.
Chile
Argentina
Belgium
Uruguay
El Salvador
Holland
Sweden
Panama
Greece
West Germany
Norway
Bolivia

DEVELOPMENTS: Dredging operations being carried out in order that vessels up to 45,000 tons with a draft of 12.3 m. can come into the port and go alongside Conceicaozinha. As a second phase, this dredging will be extended to the estuary to attain a depth of about 14 m. From this locality up to the Cosipa channel, the dredging should reach a depth of 12 m.

For the prolongation of the Macuco Quay, a depth of about 13 m. is contemplated. A section of another 375 m. with a depth of 11 m. and another of 230 m. with a depth of 13 m. will be made in an extension of 605 m.

A sugar export terminal is to be constructed within the port.

A grain terminal is to be built on the left bank. The depth at the quay will be 13.5 m. and will be able to receive vessels of 76,000 d.w.t. The capacity of the silos to be 100,000 tons.

AIRPORT: Situated at Sao Paulo, about 70 km. from Santos. Full international services.

TIME: GMT ~~plus~~ 3 hours.

HOLIDAYS: No work is accepted on the following days: Christmas Day; New Year's Day; Independence Day; Proclamation of the Republic Day; Easter; Good Friday; May 1st.

On Christmas Day, no work available except on passengers' luggage. Working overtime on holidays is possible provided application is made not later than 1500 hrs. on the preceding day. On Sundays work stops at 1900 hrs. for freighters, and is allowed to continue for passenger vessels when only handling luggage.

IDENTITY CARDS: I.D. cards not required.

TELEPHONES: Every vessel berthing between Sheds 1 to 30 will have a telephone on board, available only for local calls.

GENERAL: Flags to be shown by incoming/outgoing vessels: (*a*) National flag. (*b*) Brazilian flag. (*c*) Yellow flag – (Q) (whenever doctor's clearance is required and up to obtainment). (*d*) Customs flag (blue with a white star – to be flown 24 hours a day, after clearance is granted.)

REGULATIONS: Should vessel use any type of small craft for embarking or disembarking, the landing on shore should take place within a Customs area.

Vessels at anchor may not lower their accommodation ladder and vessels alongside may not lower the offshore gangway.

Whilst in port, at anchor or berthed alongside the quay, vessels should collect garbage in adequate containers fitted with covers whilst those lying in open spaces should be kept with their covers on.

Drainage of holds or tanks containing chemical products, oils or polluting substances which may affect the flora and fauna, is prohibited.

Painting and treatment of ship's sides and decks is authorised, the lowering of planks and craft for this purpose being permitted independently of licence from the Port Captaincy.

AUTHORITY: Companhia Docas de Santos. (After 1980 – Portobras).

SAO FRANCISCO DO SUL: 26.10 S. 48.34 W.

DOCUMENTS: See "General" before first port.

PILOTAGE: Not compulsory. Pilots join vessel at the Island Ilha da Paz about 5 km. East of bar, Pilot comes from inside with boat. Cables informing ETA to Agent.

ANCHORAGES: Channel low tide 30 ft. high tide 35 ft. Port: low tide 20 ft. high tide 23 ft.

RESTRICTIONS: Bar draft: max. 23 ft. Bottom: bar, channel and port: sand and mud. Speed of current: channel low water 4 knots high water 5 knots. Note: Reports received in August 1976 indicate that the bar has now been dredged to a depth of 8.50 m.

HEALTH: Vessel must present free pratique issued at first call-port. Port's doctor will visit vessel.

RADIO: Call Agent. Sao Francisco do Sul, via Florianopolis Radio.

TUGS: Two tugboats for shifting ships and barges.

BERTHING: Quay No. 1. Length 450 m., Quay No. 2. Length, 150 m. Depth alongside varies from 6.5 m. to 8 m.

CRANES: 7 cranes available with capacities between 3 and 8 tons.

TANKERS: *Shipmaster's Report: 1977*

Description and Approach: (Refer B.A. Charts No. 550 and 3968) This terminal consists of one S.B.M. situated about 4 miles from the shore off Ilha de Sao Francisco in position Lat. 26° 13′ 53″ S. Long. 48° 25′ 03″ W. A light beacon, Iso. Fl. R. 2 sec., is exhibited from the buoy.

The land in the vicinity of Ilha de Sao Francisco do Sul is mainly low lying with sandy beaches, however, several small steep-sided hills, 405 to 496 ft. high, are to be found near the coast at Cabo Joao Dias and from Punta da Enseada to Punta da Prainha. These are conspicuous and identifiable on radar some 35 miles off, as is Ilha da Paz in the Arquipelago das Gracas off the Northern end of Ilha de Sao Francisco.

When making the approach the course was maintained to keep outside the 20 fathom line until to the East of the S.B.M when the course was then altered to 273°. Accurate radar fixes had been obtained by this time and shortly after crossing the 20 fathom line the S.B.M. was observed on radar at a range of 13 miles and was positively identified soon after when its beacon was sighted at a distance of 12.75 miles. At the time the visibility was good and the sea calm.

About the same time the beacon on Ilha da Paz (Fl. 20 sec. 23 miles) was sighted and identified at a range of about 16 miles.

Anchorage: An hour and a half before arrival contact was made on VHF radio with the Terminal Operators who instructed the vessel to anchor in position Lat. 26° 13′ S. Long. 48° 22′ W., a distance of 3 miles from the S.B.M. they also advised that the Pilot would board the vessel at 0500 hrs. the following morning but due to language problems it was difficult to exchange much information.

Throughout the time at anchor (18th/2030 hrs. to 19th/0600 hrs.) soundings were taken every half hour and the least depth observed was 23.92 m.

Later I was handed a printed sheet by the pilot advising that the anchor positions for vessels waiting to berth at the Tefran Terminal are as follows:—

For Drafts up to 16 m.	Lat. 26° 12′ 00″ S. Long. 48° 27′ 00″ W.
Drafts 16 m. up to 18.5 m.	Lat. 26° 12′ 30″ S. Long. 48° 25′ 00″ W.

Taking into consideration the depth of water inshore and also to the North of the buoy I feel that the anchor position received by VHF is far safer and allows advantage to be taken of deeper water also this position gives more room to manoeuvre when berthing.

Charts: The S.B.M. does not lie within the area covered by the B.A. small scale chart No. 550 but this is useful for purposes of identification, however, I believe a small scale Brazilian chart is available which covers the whole area.

Pilotage: Two Berthing Masters are employed at the terminal but only work alternate ships. The Berthing Master remains on board throughout the discharge.

For boarding they prefer to use an ordinary pilot ladder but when departing like an accommodation ladder to be rigged.

Mooring Arrangements: The buoy is of usual size and shape to other S.B.M.'s and the mooring operation follows the usual pattern. Ships' lines are run out as messengers and two buoy ropes, 18 in. circumference and 50 m. in length, are hove on board and secured, 1 on each bow, by pulling numerous bights of the ships' mooring ropes through the eyes of the buoy ropes and turning each bight up on the bitts. This is a rather cumbersome method however it presented no difficulties.

Berthing is only permitted during the hours of daylight but unberthing may be carried out at any time.

The hoses may be connected on either side of the vessel as required by the Pilot on boarding.

Shore Personnel: Apart from the Berthing Master, a terminal operator and 10 men board for mooring and connecting the hoses. They all remain on board throughout the discharge. The mooring/pipe-line gang bring their own mattresses with them but rely on the ship to provide food.

Pilot boat/Work boat: An ex-fishing boat, 18 m. in length, with a black hull and black tripod mast is stationed at Enseada and used as a pilot and general work boat. Additionally for mooring a small open boat is used for running and connecting ships' lines to the buoy ropes.

In the near future 2 new and faster launches of about 18 m. in length will replace the ex-fishing boat, however, I was unable to ascertain whether or not she will still be used for pipe-line/mooring work.

Depths: As previously stated the minimum depth observed at the anchorage (26° 13′ S. 48° 22′ W.) was 23.92 m. with a sandy bottom, but evidence of some mud was found when weighing anchor.

On arrival at the S.B.M. near to the time of low water the depth was observed as 23.17 m. The Pilot advised me he thought the depth at the mooring was 22 to 23 m. also that the nature of the bottom in the vicinity of the buoy was fine sand.

To seaward of the S.B.M. the bottom appears to be fairly uniform, however, a sounding of 11 fathoms is shown on the chart 097.5° × 1.7 miles from the buoy.

Current: Referring to the South America Pilot Volume No. 1, the predominant current runs in a Southwesterly direction for most of the year with a rate of up to 2 knots, except for the months of May, June and July when the direction is Northeasterly. However, the currents and tides are influenced by the prevailing wind conditions.

Weather: I was advised by the Pilot that the area in general enjoys good weather and that most of the time the wave heights do not exceed 1 m. He also remarked that fog is rare but some mist is experienced during the months of July and August.

Maximum Draft at the S.B.M.: When questioned about the maximum draft accepted at the S.B.M. the Pilot replied that it was 18.5 or 19 m.

Terminal Equipment:

Floating hoses	2×275 m. × 16 in. diam.
Hose flanges	16 in. diam.
Hose – Buoy/Pipe-line	20 in. diam.
Pipe-line – Buoy/Shore	1×11 kms.×32 in. diam.
Distance – Ship/Shore tanks	11 kms. (6 nautical miles).
Max. Back/Pressure permitted	10 kgs.
Capacity of Shore tanks	478,260 cu. m.

Actual Discharge Rates Attained (Long tons):

Rate on bulk	7200 t.p.h.
Rate overall	6361 t.p.h.

Customs/Port Health: The normal Brazilian Customs and Health Regulations apply. About 72 hours before arrival, if coming from a foreign port, pratique should be requested through the Agents.

Contact with Installation: During discharge contact is maintained with the installation by means of VHF radio. Calling Channel 16, working Channels 14, 13, 11, 9, and 6. The Pilot and terminal operator on board the ship both carry radios, complete with battery charging equipment. Apart from the launch, this is the only organised contact with the installation.

Facilities: Hospital and dental facilities are available also provisions may be obtained. Laundry and small engineering repairs can be carried out. Bunkers and fresh water are not available at the S.B.M.

Connection with Rio de Janeiro: Regular twice daily flights connect Rio de Janeiro with the town of Joinville (near Sao Francisco do Sul) via Sao Paulo or Curitia. Travelling times (approx.) are as follows:–

Rio de Janeiro/Joinville (By air)	2.5 hrs.
Joinville/Enseada (By car)	40 mins.
Enseada/S.B.M. (By boat)	40 mins.

Film Service: No facilities exist for exchanging Walport films at this port.

Shore Leave for Ships' Personnel: No shore leave was taken by ships' personnel at Sao Francisco do Sul, however, I was advised by the Pilot that the village of Enseada, where the pilot/workboat is stationed, has 2 restaurants and other limited facilities. Further, the town of Joinville with more amenities, including hotels, may be reached in 40 minutes by car.

STEVEDORES: Sufficient working force available, working hours 0700–1100, 1300–1700 normal period; 1700–1900 days-overtime; 1900–2300, 2400–0400 night-working; 0400–0600 night-overtime.

MEDICAL: Medical attendance available, 2 hospitals, all medical care available.

FRESH WATER: 13 hydrants on quays 1 and 2, American type thread 2 in., capable of supplying 14 to 30 t.p.h. Also a private water barge of 100 tons capacity.

FUEL: Oil for boilers, diesel engines, and gasoline are distributed by a private firm, Distribuidora Maritime Porto de Sao Francisco Ltda. by tanker trucks, coming from Itajai, where orders must be placed 12 hours in advance.

DEVELOPMENTS: The bar is expected to be dredged to a depth of 9 m.

A new grain terminal is expected to be completed by 1979.

WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: By stevedores.

CUSTOMS ALLOWANCE: 1 package of 200 cigarettes, and one bottle of spirits each man.

CONSULS: Chile.

REPAIRS: Deck and engine repairs possible, workshop in town.

REPATRIATION: No facilities for changing crews.

AIRPORT: None, nearest in Joinville, with regular traffic, about 40 miles distant.

HOLIDAYS: 1st January; 21st April; 1st May; 7th September; 15th November; 25th December; Holy Friday; Corpus Christi; 8th September; 8th December.

TELEPHONES: Available at dock entrance.

AUTHORITY: Port Captain.

SAO LUIZ (Including Itaqui), Maranhao: 02.30 S. 44.07 W.

(Itaqui, situated 6 miles by sea from Sao Luiz).

LOCATION: *Itaqui:* The Port of Itaqui is located in the bay of Sao Marcos, in the Municipality of Sao Luis, Capital of the State of Maranhao, almost at the edge of the N.E. region of Brazil, and 9 (nine) kms. to the S.W. of the city, with which it is connected via a breakwater extending over the the River Bacanga.

The location, fairly sheltered, encompasses Itaqui Point and extends to the North as far as Madeira Point, where a Terminal is to be constructed for handling iron ore on behalf of Serra Dos Carajas, and to the South, reaches close to the Island of Tauamirim: it is formed by a re-entrance into the coast where the contours (depths) of 0 m., 5 m., 10 m., and 15 m., are almost parallel and are between 30 and 40 m. apart. In front of Itaqui, at a distance of 400 m. from the quay, is the Island of Guarapira with maximum dimensions of 100×300 m. and stretching in a N.S. direction.

The Area of Administration of the "Maranhao Docks Company" includes the Bay of Sao Marcos and the Islands located within it, being limited by a line which joins Tatinga Point on the mainland, to Sao Marcos Point on the Island of Sao Luis.

(a) The Port of Itaqui is confined between the parallels of 02° 34′ S., and 02° 36′ S. and meridians 44° 21′ W. and 44° 24′ W.

(b) The "Administrative Area" is confined by the following co-ordinates:

Meridians of 44° 24′ W. and 44° 19′ W.
Parallels of 02° 37′ S. and 02° 29′ S.

(c) The Area of Jurisdiction encompasses the whole of the coast of the State of Maranhao, from the border with the State of Piaui as far as the frontier with the State of Para.

DOCUMENTS: See "General" before first port.

PILOTAGE: Approaching coast, the Master must inform Agent via Coast Station Sao Luis – PPB (VHF Channels 16, 24, 25, 26 and 27) or Radio Marinha de Sao Luis – PWM (HF). Pilot launch painted red and provided with conventional lights. Launch awaits at Ponta da Madeira or other places requested in limit by Brazilian Chart DHN–412.

Vessel to notify Pilot service of ETA 6 hours before arrival.

ANCHORAGE:

Sao Luiz: The following areas are reserved for the anchorage of vessels awaiting to enter port.

(a) Location No. 1 for vessels of more than 2,000 g.r.t., up to 21 ft. draft and 135 m. overall (this is the nearest anchorage to the town).

Location No. 2 for vessels up to 18 ft. draft (and that which follows No. 2).

Location No. 3 for vessels up to 18 ft. draft (is the nearest to the bar).

These anchorages are situated between the parallels of 02° 30′ 5″ S. and 02° 31′ 5″ S.

(b) Vessels impounded or requiring extensive repairs:
Vessels up to 10 ft. – Lat. 02° 31′ 9″ S. Long. 44° 18′ 7″ W.
Larger vessels: Lat. 02° 30′ 0″ S. Long. 44° 20′ 0″ W.

(c) Anchorage for vessels of less than 2,000 g.r.t. To the South of the partly submerged hull of the *Maria Celeste* between the State Warehouse and the Customs Warehouse.

(d) Vessels in quarantine: Lat. 02° 29′ 5″ S. Long. 44° 20′ 5″ W. Vessels may not anchor in the approach channel or the turning basin.

Itaqui: The following anchorage zones for vessels arriving at Itaqui:

(a) Vessels over 5,000 g.r.t.: Lat. 02° 35′ 5″ S. Long. 44° 22′ 4″ W.
(b) Vessels impounded or requiring extensive repairs: Lat. 02° 35′ 1″ S. Long. 44° 22′ 3″ W.
(c) Vessels in quarantine: Lat. 02° 35′ 4″ S. Long. 44° 23′ 3″ W.
(d) Inspection anchorage: Lat. 02° 35′ 2″ S. Long. 44° 22′ 4″ W.

RESTRICTIONS:

Sao Luiz: May only be entered during daylight hours and near HW.

Itaqui: Cargo vessels may moor any time during the day or night depending on the state of the tide. Vessels bound for the oil terminal may only berth on the rising tide during the day. Berthing should commence 1 hour before H.W.

HEALTH: (See "General" before first port.) Health Authorities visit compulsory, due to disinfection by Yellow Fever Service.

Tankers bound for the oil terminal will be inspected at the terminal after mooring is completed.

Vessels awaiting berths will be inspected at the inspection anchorages.

RADIO: Radio Marinha, code PWM, may be used for any message to the Agent.

TUGS: *Sao Luiz:* One tug 50 h.p. available.

Itaqui: None.

MAX. SIZE: For port of Itaqui, max. draft at LW is 31 ft. At HW, depth of 45 to 48 ft. available depending on height of tide.

BERTHING: *Sao Luiz:* See "Anchorage".

Itaqui:

Warehouse Quay – Length 367 m., depth 9.00 m.
North Quay – Length 270 m., depth (max.) 18 m.
South Quay – Length 80 m., depth 12 m. – 14 m. (greater depth at the South end).

The 80 m. quay will be provided with a ramp for car ferries.

CRANES: *Sao Luiz:* 8 portal cranes (2×6 tons, 6×3 tons) 1×50 tons, 2×3 tons, 1×6 ton on order.

Itaqui:

6×3.2 ton (gantry), 2×6.3 ton (gantry)
3×2.5 ton (mobile), 1×4.0 ton (mobile).
1×9.1 ton (mobile), 2×4 ton (tracked mobile).

BARGES: *Sao Luiz:* 11 barges of 60 tons, 5 barges of 80 tons and 1 barge of 150 tons capacity. There are also 5 oil barges with a total capacity of 1,090 tons.

BULK HANDLING FACILITIES: 2 grain elevators, rate 150 t.p.h. The Maranhao Wheat Mill has silos with 12 cells, capacity 6,000 tons. Additional silos with 2,000 tons capacity available. The rated capacity of the elevators will be doubled in the near future.

STEVEDORES: On receipt of vessel's ETA Agent provides the necessary gangs. Master to mention in his ETA cable the distribution in cargo hold enabling Agent to arrange for number of gangs required. When loading or discharging bagged cargo an average of 4,000 bags per 8 hours work per gang handled.

MEDICAL: Advance notice by radio preferred, since medical assistance in S. Luiz is limited to 1 general clinic and 3 hospitals.

FRESH WATER: *Sao Luiz:* Fresh water available by barge, rate 60 tons per day. There is also an outlet at warehouse No. 4 on the quay.

Itaqui: Available.

Tank Capacities:

	Esso		Sabba		Texaco		Petrobras		Gas Butano	
Products	*No. of Tanks*	*Volume (cu.m.)*	*No. of Tanks*	*Volume (cu.m.)*	*No. of Tanks*	*Volume (cu.m.)*	*No. of Tanks*	*Volume (cu.m.)*	*No. of Tanks*	*Volume (cu.m.)*
Gasoline	2	4,003	2	4,800	1	4,000	1	9,135		
Kerosene	1	1,580	1	8,000	1	400	1	1,544		
Diesel Oil	1	3,200	2	5,500	1	3,200	1	9,135		
Jet Kerosene					2	1,600				
Liquefied Gas									6	704
B.P.F.							1	4,032		

TANKERS: Discharge at port of Itaqui. One berth for up to 32 ft. draft. *See Table above.*

FUEL: *Sao Luiz:* Fuel oil available to vessels alongside, delivery by road tanker.

Itaqui: Diesel oil available to vessels alongside the Warehouse Quay and South Quay.

GANGWAY/DECK WATCHMEN: Normally done by the crew.

OPENING/CLOSING HATCHES: Done by stevedores.

CUSTOMS ALLOWANCES: No limit or restrictions.

IDENTITY CARDS: Foreign Crew members not permitted to go ashore without presentation of Identity Card, on which is a photograph of holder and personal details. These cards are provided by the Agent upon arrival. The Identity Card must be given on disembarkation to the Federal Police who will return it to the Crew member on re-embarkation.

CONSULATES:

France Tel. 1117	Spain Tel. 2664
Portugal ,, 1689	Norway ,, 1888
Denmark ,, 1507	Bolivia, no telephone

Italian Consul at Itaqui. Tel: 2-04-08.

REPAIRS: Shop for small repairs available.

REPATRIATION: Problematic because Maritime Police being inadequately equipped.

AIRPORT: 13 kms. from centre of town (18 kms. from Itaqui), with daily flights to North and South of country.

TIME: 1 March to 30 November GMT minus 3 hours; 1 December to 28 February GMT minus 2 hours.

HOLIDAYS: January 1st; April 21st; May 1st; September 7th; November 15th; December 25th (National holidays). July 28th; September 8th, December 8th, June 29th (local holidays); Maundy Thursday; Good Friday (Church holidays). On all holidays, except Good Friday, work permitted.

POLICE/AMBULANCE/FIRE: Police Tel. 1150; First Aid Ambulance 1943; Fire Brigade 1753.

TELEPHONES: No facilities for placing telephones on board.

DEVELOPMENTS: Wharf at Itaqui to be extended to 1,068 m. Depth will vary from 30 to 40 ft.

The existing petroleum berth will be replaced by the final extension of the wharf, although plans indicate the intended construction of a new Petroleum Berth on Guapira Island.

An iron ore loader is to be built on Punta do Madeira, dredging will allow 300,000 d.w.t. vessels to use the berth.

AUTHORITY: Capitania dos Portos do Maranhao.

AGENT: Pedreiras, Transportes do Maranhao Ltda., Rua Dr. Tarquinio Lopes No. 241-A. Cable address: "Pedra". Tel. 2226512–2225071. Telex: 0982162.

SAO SEBASTIAO: 23.48 S. 45.24 W. (See Plan Book)

LOCATION: Terminal Maritimo Almirante Barroso (TEBAR) is located on the West edge of the Sao Sebastiao Channel. Safe access is made through the South entrance. The approximate geographical position of berths is Lat. 23° 48′ 3″ S., Long. 45° 23′ 3″ W.

The port limits extend from Ponta do Araca-Ilha das Cabras to Pontal da Cruz-Pontal do Paquea.

DOCUMENTS: The visiting area of the Port Health Authorities, Federal Revenue and others, is designated by the alignment: Ponta do Araca-Ilha das Cabras (South) and South limit of the zone of submarine cables (North).

Inward clearance is effected on board immediately after docking by Government Port Officials and Agent's representative. It is necessary that the following documents be ready on arrival.

Any document regarding outward clearance of the ship at last port of call.
5 copies Crew List.
2 copies Store List.
2 copies Personal Effects List.
3 copies Passenger List.
3 copies Cargo Manifest, (or more if available).
3 copies Bill of Lading, (or more if available).
2 copies Maritime Declaration of Health.
Notice of Readiness (Addressed to Petrobras)
List of vessel's particulars: call sign, n.r.t., g.r.t., d.w.t., speed, engine b.h.p., draft, total crew, officers, time of arrival, loading ports and dates of sailing, quantity of cargo for Sao Sebastiao, quantity of cargo in transit for other ports, etc.

PILOTAGE: Pilotage is compulsory between the intersection of the Sao Sebastiao channel with the alignment of the coordinates Lat. 23° 43′ 18″ S. Long. 45° 20′ 12″ W. and Lat. 23° 43′ S. Long 45° 21′ 18″ W. (North bar — Chart DHN No. 1616) and the intersection of the Sao Sebastiao channel with the alignment of the coordinates Lat. 23° 53′ 36″ S., Long. 45° 28′ W. and Lat. 23° 52′ 42″ S. Long. 45° 29′ W. (South bar – Chart DHN No. 1615), except for Brazilian vessels less than 10,000 d.w.t. and which do not call at the port itself (passing only).

Pilotage is compulsory in the port of Sao Sebastiao for all vessels over 1,000 d.w.t. which enter, depart or manoeuvre between the 2 intersections mentioned above, (South and North bars).

The request for Pilots for entering should be made through the ship's Agents 24 hours in advance via Santos radio station PPS when the vessel's ETA is given. The ETA should be confirmed 3 hours in advance through Channels 13 or 16 (VHF) to the Pilot's Association of the Port of Sao Sebastiao.

The positions for boarding and disembarking of the Pilot – are defined by the areas of the circles of 0.5 mile radius whose centres are the following coordinates (Chart DHN No. 1614):

(a) NORTH BAR: Lat. 23° 42′ 30″ S., Long. 45° 21′ W.
(b) SOUTH BAR: Lat. 23° 53′ 30″ S., Long. 45° 29′ 30″ W.

The Pilot's Association functions at Rua Manoel Ladislau de Mattos, 27, Suite 24, telephone 52-1332 – Sao Sebastiao. The Pilot's Association also has a branch office in Santos at Rua General Camara 5, Suite 606, telephone 34-3992.

APPROACHES: *Approaching Channel:* the channel of the port of Sao Sebastiao is 12.3 miles long. The South bar channel, dredged to 25 m. is 30 m. wide at its narrowest part, allowing entrance and sailing of vessels drawing up to 23 m. The North bar channel sounded to 18 m. is 550 m. wide at its narrowest part, allowing entrance and sailing of vessels drawing up to 10 m.

Special attention should be paid by vessels drawing over 18 m. when navigating in the Sao Sebastiao channel; Charts DHN Nos. 1615 and 1616 show several cautions with depths of 20 m. and less in the proximities of the limits of the channel. "Caution A" on chart DHN No. 1616 should be strictly observed: Existence of submarine cable. It is forbidden to anchor within the marked area.

Tidal Stream: The height of the tide in the port of Sao Sebastiao varies from (–) 0.2 m. at LW and 1.5 m. HW, having an average level of 0.66 m. The tide runs either Northerly into the channel or Southerly with characteristics of permanent flowing as if it was a river following the orientation as given by the channel. The current attains considerable speeds which might prejudice the manoeuvring of vessels in the channel, specially at times of entrance of a cold front when winds also attain a significant force.

ANCHORAGE: In the area designated as the pilotage area (between the aforementioned 2 intersections), the following are the zones for anchorage:

Zone	*Limits*	*Utilization*
A	Between the alignment: Cais Commercial (Commercial quay) – Pontinha and Extreme North of the Pier Ponta de Itaguassu.	Destined for berthing and unberthing manoeuvres up to the distance of 500 m. from the pier. Anchorage permitted for stay of less than 6 hours in the rest of this area for ships drawing max. 65 ft.
B	Between the alignment: Extreme North of the pier Ponta de Itaguassu and the South limit of the zone of the submarine cables.	Anchorage for vessels drawing less than 65 ft. with preference for those staying more than 48 hours.
C	North of the zone of the submarine cables	Anchorage for vessels drawing more than 65 ft., staying more than 48 hours.
D	Between the alignment: Cais Comercial (Commercial quay) Pontinha and Ponta do Araca, Ilha das Cabras	Anchorage for vessels drawing less than 65 ft. with stay of less than 48 hours.
E	South of the alignment: Ponta do Araca, Ilha das Cabras.	Anchorage for vessels with special cases and/or when the other areas are occupied.

RESTRICTIONS: The terminal normally operates around the clock. Ships are moored and unmoored at any hour except when an unexpected event arises, such as breakdowns, gales, heavy squalls, and so on.

The safe draft for passing along the dredged channel is 23 m. (75.5 ft.), no matter what existing conditions are, such as day or night, current set and drift, wind, tide or swell. However, at the discretion of Pilot, according to the prevailing above conditions vessels can use the channel with drafts up 24 m. (78.7 ft.) These figures are not final as they may change in time without previous notice.

Remarks: The limitations mentioned above could result in rejection of the ship as being unsuitable for this terminal.

MAX. SIZE:

Position 1 (external berth, South pier): 26 m. (85 ft.) depth, for tankers up to 300,000 d.w.t., with max. draft of 23 m. (75.45 ft.).

Position 2 (internal berth, South pier): 19 m. (62.32 ft.) depth, for tankers up to 170,000 d.w.t., with max. draft of 17 m. (55.76 ft.).

Position 3 (external berth, North pier): 19 m. (62.32 ft.) depth, for tankers up to 135,000 d.w.t., max. draft of 16.9 m. (55.50 ft.).

Position 4 (internal berth, North pier): 13.7 m. (45 ft.) depth for tankers up to 65,000 d.w.t., max. draft 12.2 m. (40 ft.).

HEALTH: Port doctor visits all ships on arrival and requires Maritime Declaration of Health, Deratisation Certificate, 2 Crew Lists. Vessels from another Brazilian port automatically receive free pratique and should not fly Quarantine Flag. If suspected disease or fever on board it is advisable to cable Agent before arrival.

RADIO: Vessels under time-charter to Petrobras bound for Sao Sebastiao should advise Company of ETA 48 hours before arrival to "Fronape-Rio" through Rio Radio (PPR) as well as to Agent's cable address through PPR (Rio Radio Brasilian Post Office radio station). In turn they will pass message to the terminal. Confirmation or change of ETA should be cabled 24 hours prior to arrival. Vessels equipped with VHF radio telephone should call on Channel 16/Delta: 156.8 mHz (and then change to another agreed Channel) when within range for berthing instructions. All ETA's should indicate whether it is local time or GMT. English is generally understood by Pilots and terminal representatives. Weather forecast as well as Notice to Mariners are transmitted by PWZ and PPR radio stations. Radio equipment should not be used at the piers. Communication ship-to-shore will be by telephone.

TUGS: 6 diesel tugs available equipped with fire fighting and foam appliances. 2×3,170 h.p. (41 ton bollard pull), 2×2,360 h.p. (25.4 tons), 1×1,010 h.p. (15.8 tons) and 1×350 h.p. (5.8 tons).

Vessels are berthed against the current.

Whistling signals for the port:

(a) Calling the Pilot: 2 long blasts and 1 short.

(b) Calling tug boats: 4 long blasts – 1 tug boat; 4 long and 2 short blasts – 2 tug boats; 4 long and 3 short blasts – 3 tug boats; 4 long and 4 short blasts – 4 tug boats; 4 long and 5 short blasts – 5 tug boats.

(c) Before passing the tow line: 2 short blasts; prepare to push the bow or to receive the forward towing line; 3 short blasts: prepare to push the stern or to receive the aft towing line.

(d) After fastening: (Towing or unberthing): 1 long blast – pull to starboard; 2 short blasts – pull to port; 3 short blasts – pull aft; 1 short blast – stop pulling.

(e) Manoeuvring on ship's side: 2 short blasts – push; 1 short blast – stop.

Observations:

1. When the vessel is equipped with VHF frequency same as the tug boats, the orders for manoeuvring may be given on the Radio.
2. When necessary, the Pilot or ship's Master shall inform the tug's Master the manoeuvring to be performed.
3. When having a tug forward and another aft, the tug forward should be ordered by mouth-whistle and the tug aft with the ship's whistle. This order may be inverted according to the type of vessel involved.
4. In case of more than 2 tugs being employed, the tugs located from amidships to forward, the order should be given with the mouth-whistle and located from amidships to aft with the ship's whistle.
5. The Master's of the tug boats should immediately acknowledge all the whistle blasts given by the vessel by repeating the same.
6. The ship should inform in advance which side to be pushed or to which side the towing line to be given.
7. The signal given to let go the towing line from the tug will be 1 short, 1 long and 1 short blast.
8. After completion of each manoeuvre the ship's Master or the Pilot will dismiss the tug boat by verbal order.

Other sound signals:

Sound signal to give warning:

Vessels demanding the port authorities, before passing Ponta do Araca should blow a long blast.

Ship's whistle to call small craft:

1 long blast followed by a short 1 shall be used to call boats for taking the ship's lines to the quay and launches for transportation of Crew members and passengers.

Whistle to call linesmen:

1 long, 1 short and 1 long blast.

Circular: Instructions for employment of tugs during pilotage operations at the "Almirante Barroso" Maritime Terminal (Tebar):

1. To operate at "Tebar" vessels over 15,000 d.w.t., should have tug of at least 15 tons bollard pull.
2. The employment of tugs with adequate power is compulsory as from the manoeuvring area, both when berthing and anchoring at the waiting area. In case the vessel is without propulsion, a minimum of 3 tugs should be employed, 2 forward and 1 aft, with tow line fast.
3. During the unberthing operations of vessels of any given tonnage, the employment of at least 2 tug boats of adequate power is compulsory.
4. During berthing operations under normal conditions, the number of tugs to be employed should be, at least, the number of tugs indicated in table and as many as may be necessary to meet the following minimum requisites of bollard pull.
5. When for the sake of safety the Pilot may consider necessary a number of tugs beyond the number mentioned, he may act accordingly, justifying same, shortly therafter, in writing to the Delegate of the Captaincy in Sao Sebastiao.
6. When the condition of the sea, intensity of the wind or the visibility stop operations, the Pilot's Association should officially inform the Delegacy in Sao Sebastiao, accordingly.
7. The Agents of the companies engaged in the services of tugs at "Tebar" should submit to the Delegacy and the Pilot's Association in Sao Sebastiao copies of the static pull referring to each tug.

Deadweight Tons (× 1000)	*Static Traction in tons*	*Minimum number of Tugs*			
		Outer berths		*Inner berths*	
		P1	P3	P2	P4
up to 15	19	2	2	2	2
15 to 30	30	2	2	2	3
30 to 65	40	2	2	3	4
65 to 100	50	2	3	4	—
100 to 135	60	3	4	4	—
135 to 200	70	4	4	4*	—
200 to 250	90	4	—	—	—
250 to 300	100	4*	—	—	—
300 on	130	4*	—	—	—

*Should extra tugs be available employment is recommended.

GENERAL CARGO WHARF: *Commercial Quay:* Length 150 m., depth 8.2 m. Fresh water available, 3 hydrants, capacity 10 cu.m. p.h. each. Fuel available by road tanker in small quantities.

Cranes: 1×53 tons, 2×20 tons, 1×15 tons and 6×4.5 tons.

TANKERS: The pier is located on the Western edge of the channel between the shore and Sao Sebastiao Island. Safe access for large tankers is possible through the South entrance but smaller tanker or draft 35 ft. or less may enter through the North entrance.

The head of the jetty which is "T" shaped is 1,690 m. (5,544 ft.) from the shore, in position 23° 48.2' S. 45° 23.3' W.

The South pier is 580 m. (2,214 ft.) length and the North pier 300 m. (1,450 ft.).

See also "Max. Size".

Loading arms:

Position 1	4×16 in. (cargo hoses) 2×12 in. (diesel oil)
Position 2	3×16 in. (cargo hoses) 2×12 in. (diesel oil)
Position 3	2×12 in. (cargo hose) 2× 8 in. (diesel oil)
Position 4	Same as Position 3

Reducers are available. All shore hoses are chiksan type arms.

Maximum Height: Max. height of hoses above platform: Position 1: 21.5 m. (70 ft.); Position 2: 17.8 m. (58 ft.); Position 3 and 4: 16 m. (52 ft.).

Pipe-lines: Two 34-in. diameter pipe-lines, 2,300 m. (7,500 ft.) link the South pier to the shore tanks. 2 24-in. diameter pipe-lines, 2,000 m. (6,500 ft.) link the North pier with the shore tanks.

LOADING: *Maximum permissible pressure:* Both piers 8 kg/cm^2. (120 p.s.i.).

Pumping Rates: South pier: 100,000 bbl/h. if using two 30 in. lines and 3 or 4 hoses; up to 50,000 bbl/h. if using one 30 in. line and 3 or 4 hoses.

North pier: up to 50,000 bbl/h. if using two 24 in. lines and 2 hoses; up to 28,000 bbl/h. if using one 24 in. line and 2 hoses.

BALLAST: Brazilian laws are very strict in regard to the pollution of harbour and coastal waters. Vessels should not discharge dirty ballast, ashes, refuses, etc., into the water. Heavy fines are imposed for violations. All overboard discharge valves from cargo tanks and bilges are to be secured before any loading or discharging commences. All deck scuppers should be plugged to avoid harbour contamination should an oil spill occur. To offenders, fines will be charged (besides resulting delays) according to the ship's tonnage. Facilities for receiving dirty ballast are available. However, amount is dependent on space in shore tanks at the time. Capacity of tanks 12,000 cu. m. (75,000 bbls).

MEDICAL: Medical treatment and/or hospitalisation, if required, is provided in the private local hospital. Dentists are available in the area. For emergency cases (serious illness or injury) TEBAR first medical aid may be requested by the Master. Internal telephone number is 20. If patient does not speak Spanish or Portuguese, an interpreter should accompany him.

FRESH WATER: Fresh water can be supplied, at the oil berths, 3 hydrants on the North pier and 2 hydrants on the South Pier. Rate of each hydrant 25 cu.m. p.h.

FUEL: The Terminal is equipped with blending valves and is able to deliver Bunker C, Fuel Oil, Marine Gas Oil, Marine Diesel Oil and Intermediates of any grade – concurrently with working cargo at international prices.

The supply rates are about 300 t.p.h. for Bunker C, 180 t.p.h. for M.G.O. and 450 t.p.h. for intermediates.

Orders for Bunkers should be placed, with a minimum of 48 hours notice to:

Divisao de Abastercimento a Navios – Departamento Comercial, Av. Republica do Chile 65, 19.° andar, Rio de Janeiro – Brazil. Telegraphic address: PETROBRASECOPE Telex numbers: 031422 and 031423.

Lubricating Oils: Orders for marine lubricants should be placed at least 15 days in advance and subject to confirmation to: PETROBRAS DISTRIBUTIDORA, Praca 22 de Abril, 36, 4.° andar, Rio de Janeiro – Brazil. Telegraphic address: PETROEDIPE Telex numbers: 031422, 031423 and 031424. Telephone numbers: 242-9381 and 242-4901.

Simultaneous bunkering and discharging operations. Considering that the loading/discharging hoses cannot be crossed with bunkering hoses, the simultaneous bunkering and discharging operations will depend on the position of the ship's bunkering manifold. If the ship has 2 bunkerings manifolds at each board – 1 at each side of cargo manifolds – the bunkering and the discharging may be effected at the same time. However, supposing a tanker has only 1 bunkering manifold at each board (located to the aft part in relation to cargo manifolds), this simultaneous operation will only be possible if the ship, is berthed port side at position 3 or starboard side at positions 1, 2 and 4. Contrariwise, upon completion of loading/discharging the ship will have to be shifted a few metres forward to receive bunkers.

SURVEYORS: *Petroleum Inspectors:* None available in Sao Sebastiao. If required, arrangements should be made well in advance. A representative of Chas. Martin and Co. is based in Rio de Janeiro and E. W. Saybolt & Co. in Santos.

REPAIRS: 11 repair shops available, best equipped being Metalock do Brazil S.A. Services of divers also available. When alongside pier, vessels must maintain engines and propulsion machinery in readiness to leave the berth under full power on short notice. No repairs are permitted which would interfere with this requirement. In the event of a ship unable to leave the pier under its own power, when requested to do so by the terminal, the terminal reserves the right to arrange to have the ship towed from the pier. Any expenses incurred or delays resulting from such an operation will be for the account of the ship.

CUSTOMS ALLOWANCES: For each Crew member, 2 packets of cigarettes and 1 bottle of wine or spirits. While the vessel is in port, Brazilian custom's officials are assigned on board to ensure compliance with customs regulations. Meals must be supplied to these officials during regular meal hours. Brazilian laws are strict in regard to smuggling and Masters are requested to instruct their crews not to take cigarettes or other articles ashore. Cigarettes in carton lots, cigars, tobacco, alcoholic drinks, souvenirs, etc., should be collected prior to arrival in port, listed with the items in the slop chest and placed in the custody of the Master for deposit in the slop chest or closet which will then be sealed for the duration of the vessel's stay in port. By no means will any commercial transactions be tolerated, be it either among terminal employees, Crew members or anyone else. Cigarettes or other stores in bond are not obtainable in Sao Sebastiao.

POLICE/AMBULANCE/FIRE: Police 52-1400, Fire (Petrobras) 52-1111.

CONSULS: No consular representatives are reported to exist in the area.

AIRPORT: At Ubatuba.

TIME: Local time is GMT minus 3 hours.

SHORE LEAVE: The access pier is 1,600 m. long. The crew can use it to get ashore, but special passes are required for this purpose. There is, however, a launch service provided by Agent.

TELEPHONES: No service at the Commercial quay. At tanker terminal there are telephones in the control room.

GENERAL:

Brazilian Flag: Authorities are exercising rigorous inspections as regards the condition and the correctness of measures, colours, etc., of the Brazilian flag flown by vessels in port. In principle, the flag should be flown from 0800 to 1800 hrs. Heavy fines are imposed on the ship if these instructions are disregarded. In case no suitable flag is found on board, a radio message should be sent a few days in advance, so that this item may be supplied upon arrival.

National Holidays: By order of the local Port Authorities it is requested that all ships in port must be fully dressed on the following National Holidays: 7th September and 15th November.

Watches: An efficient watch must be maintained on board the ship, deck and engine room and a sufficient number of Crew members should always remain on board to cope with emergency or port operation situations.

Ratguards: Ratguards must be placed on all mooring lines.

Visit of Authorities: In case the ship enters and berths directly, the official visit of Authorities together with the Agents will take place as soon as she is tied up and the gangway is lowered. However, if the ship is not berthed immediately upon arrival (e.g. in view of the pier being occupied, or any other reason), the visiting party will proceed to the ship by motor-boat as soon as she drops anchor. If the ship arrives after 2100 hrs. it is possible that Authorities will decide to visit the ship next morning at 0800 hrs.; however, the ship is authorised to operate normally and Crew members are allowed to go ashore.

Seamen left ashore: Ships are not permitted to sail until all Crew members are on board. Should, however, a Crew member definitely not be found, his passport (or seaman card) and his international vaccination certificates must be given to the Agents, together with a letter requesting him to be repatriated.

Weather and Tide Conditions: The weather at Sao Sebastiao is generally very favourable: no strong winds, no speedy currents and usually not even a swell is observed in the channel. The winds are unpredictable for more than a few hours in advance; usually it blows from N.N.W. or S.S.W. As regards rain, the annual precipitation averages 2,000 mm. The visibility is mostly fair, although in Autumn and Winter it may become rather poor in the early morning. The temperature ranges from 15°C (59°F) in July to 39°C (104°F) in January. The relative humidity of the air is usually high, often exceeding 85%. The normal range of tides is around 1.2 m. (4 ft.). Although higher ranges of 2 m. (6.5 ft.) have been noticed during Spring. The currents are irregular but usually follow the direction of the wind; according to the intensity and the duration of the wind, the drift may range from 1 to 4 knots.

Derating Certificate: In case the Derating Certificate has expired and needs to be renewed, a radio message should be sent to the Agent a few days before arrival, so that they are able to make the necessary arrangements with the Sao Sebastiao Port Health Inspector.

Renewal of Vaccination Certificates: For the same reason mentioned above, the Master should send, beforehand, a radio message stating how many vaccinations of each kind will be required. The vaccinator has to come from Santos.

Passengers: Passengers will be permitted to disembark if in possession of the required visa and documents for identification.

Visitors: Only the personnel duly authorised by Port Authorities may come on board the ships; this excludes all visitors. Relatives of Crew members may obtain from Port Authorities a licence to go on board.

Constant Readiness: During the time the ship is berthed alongside, her engine and propulsion machinery should be in readiness to leave the berth on short notice. No repairs are permitted which would interfere with this requirement.

Smoking: Smoking in open areas of the ship and on the pier, is strictly forbidden. The crew are not to throw lighted cigar or cigarette butts overboard.

Photography: The taking of photographs within the terminal is prohibited.

Emergency Towing Wires: 2 towing wire ropes should be always hanging to the water's surface so that the tugs can easily make fast should an emergency arise.

Gangways: All ships calling at Sao Sebastiao must provide a safe gangway. Authorities may refuse to board the ship if a safe gangway or accommodation ladder is not provided. At night, the pilot ladder must be adequately lit. The terminal is not equipped with platform ladder. The ship's ladder must be used.

Lifebuoy: A lifebuoy with 15 fathoms (27 m.) of rope should be kept nearby the gangway for use in case of emergency.

Ship's Fire-fighting Equipment: At least 2 fire hoses should be connected to hydrants on main deck: 1 forward and the other abaft the cargo valves manifolds. A third hose with an NPU nozzle and 2 mechanical foam containers should be kept nearby the pump-room. The ship's main fire-extinguishing system should be kept under constant pressure.

Minimum Draft for safe Manoeuvring: Although the amount of ballast carried on vessels is at the Master's discretion, the table below is recommended as a guide:

Vessels of 30–40,000 t.d.w. draft for'd 16 ft. aft 20 ft.
Vessels of 40–50,000 t.d.w. draft for'd 18 ft. aft 24 ft.
Vessels of 50–70,000 t.d.w. draft for'd 20 ft. aft 28 ft.
Vessels of 70–100,000 t.d.w. draft for'd 24 ft. aft 32 ft.

Vessels over 100,000 tons should be ballasted to approximately one third of the vessel's deadweight.

Bond Wire: Before the connection of shore hoses, the bonding wire will be connected, by a terminal employee, to ensure a good grounding electric contact.

Boiler Tubes and Sparks: Whilst alongside the pier, no boiler soot blowers may be used. The use of derricks is also forbidden (excepting the poop derrick, when lifting stores, provisions, etc.). Likewise, the use of objects and/or tools which may cause sparks is also forbidden.

Fire Signal: Should fire break out in any part of the ship, the fire alarm should be given: a continuous sounding of 7 short blasts on the whistle, followed by a long one.

Transportation of Stores, etc., from shore to ship: The terminal does not permit the carriage of items through the jetty. Consequently, the ship has to use the services of a motorboat, or a tugboat or of a floating craft (which is towed to the ship's side). The motorboat boat or the tugboat may only approach the ship by the sea side. No derricks may be used, although the terminal has no objection to the use of the poop derrick or crane (sea side). Depending on the nature and the weight of items involved, they may be taken on board using the gangway (sea side).

Laundry: No laundry facilities available at Sao Sebastiao, however, Las Vegas Lavanderia, located at Caraguatatuba (about 30 km. from Terminal) is equipped to handle laundry services for ships calling at Sao Sebastiao.

Rubbish: Garbage bins are available at the Commercial quay. No facilities at the Tanker Berths.

Provisions and Stores: Provisions and stores are supplied by shipchandlers contracted directly by Owners or Masters or through the Agents. Usually they have to be brought from Santos, which requires a radio advance request, in view of the distance involved. It is hoped that in the near future provisions and stores in large quantities may be easily obtainable in Sao Sebastiao. Some items may be obtained in Caraguatatuba.

REGULATIONS:

Craft not directly engaged in the port's traffic should navigate at a minimum distance of 150 m. from the Maritime Terminal and from vessels alongside and at anchor.

Skin diving and underwater hunting are prohibited in the area assigned as being the port of Sao Sebastiao.

The line between Pontinha Lighthouse and the Cais Comercial (Commercial quay) should be kept permanently clear due to the traffic of ferry boats.

The passage through the Sao Sebastiao channel of foreign flag vessels other than those destined for the port itself is prohibited.

The maximum speed allowed between the limits of the port of Sao Sebastiao for vessels over 1,000 d.w.t. is 8 knots.

Craft and vessels berthed on the external side of the Cais Comercial (Commercial quay) and Maritime Terminal, on both sides, should maintain vigilance and be manned.

All vessel which, for any given reason, may have to stay in the channel and port of Sao Sebastiao for more than 1 week, should communicate in writing to the Delegacy of the Port Captaincy the reason surrounding the fact and informing at the same time the expected time of stay.

SHIPMASTER'S REPORT:

Pilotage: Vessels normally sail and arrive by the Southern entrance.

Anchorages: The holding ground for VLCCs is not very good, but appears good for smaller vessels. (We had 3 cases of ships dragging during our 2 and a half weeks stay, all VLCCs.) The current runs Northerly or Southerly depending on the wind.

Tugs: 5 tugs normally used for berthing and unberthing irrespective of vessel's size.

Medical: Dental and routine medical matters available. Specialists are available some miles away. For inoculations the doctor comes from Santos.

Fresh Water: Rates are dependent on number of vessels watering and can be as low as 10 t.p.h.

Customs Allowances: 2 cartons cigarettes per man. Customs no longer stay on board the vessel.

Repatriation: Is possible, but involves lengthy car ride to Santos or Rio de Janeiro. The best and nearest airport is outside Sao Paulo, where International flights are available. This is quicker than going to Rio.

Telephone: Available in jetty control rooms.

Shore leave: When berthed the Agent can arrange a minibus service from the T-head of the jetty.

Port Regulations: Vessels throwing or discharging anything into Brazilian waters are subject to a fine equalling 2% of the minimum Brazilian basic wage multiplied by the vessel's gross tonnage. Garbage disposal is difficult to arrange and they will only accept dry garbage.

General: Communications are poor, no Telex and messages have to be telephoned to Santos. Best method is to use ship's equipment when at anchor.

AUTHORITY: Petroleo Brasileiro S.A. and Captain of the Port.

SEPETIBA TERMINAL, Guaiba Island: 23.00 S. 44.02 W.

See "General" before first port.

LOCATION: About 50 miles West of Rio de Janeiro, is the site of a bulk iron ore terminal located off the S.E. end of Ilha Guaiba about seven miles due North of the bay entrance.

PILOTAGE: Compulsory for all ships entering the bay and berthing and unberthing at the ore facility. Pilots board in the vicinity of 23° 08′ 39″ S., 44° 04′ 36″ W. A pilot ladder, boat rope, and gangway must be properly rigged with the landing platform of the gangway lowered to within 5 m. (16.5 ft.) of the water. Adequate lighting should be provided at night.

ARRIVAL INFORMATION: Vessels bound for Baia de Sepetiba should send an ETA to their Rio Agents, via Rio Radio, six days, 48 hours, and 24 hours prior to arrival. Any significant change in this ETA should be corrected as soon as possible but not less than 8 hours prior to arrival. Also see "VHF".

ANCHORAGE: In the vicinity of the Pilot boarding area. Ships should not proceed beyond this point unless a Pilot is aboard and instructions have been received from Sepetiba Marine Operations to proceed.

HEALTH: Radio pratique should be requested 72 hours prior to arrival by transmitting a quarantine message to the Port Health Authorities through the the ship's Agent. This message should contain the following information: name and nationality of vessel; last port of call; number of crew and passengers; general conditions of health on board. Also see "General" before first port.

VHF: Vessels are requested to contact Sepetiba Marine Operations directly when within VHF radio-telephone range. Channel 16 is the calling channel and 11, 12 and 13 are the working channels. Anchoring or berthing instructions should be requested 4 hours prior to arrival or when within VHF radio-telephone range.

TUGS: Tug assistance is compulsory for all manoeuvring in the vicinity of the pier and 3 powerful twin screw tugs are available for this purpose. All ships should be equipped with a wire cable tow line with a nylon pendant. Radio-telephone communication is maintained between the tugs and the Pilots on Channel 6.

BERTHING: Facilities consist of a deep-water pier located about 400 m. (1,312 ft.) South of the island. The South berth has a depth of 24 m. (78.75 ft.) alongside and the North berth has a depth of 19 m. (62 ft.). A mooring dolphin at the West end of the pier provides an overall mooring length of 470 m. (1,541 ft.) alongside the South berth. Bollards are spaced along both pier faces and quick release hooks and capstans are fitted for breast, bow and stern lines.

BULK HANDLING FACILITIES: One travelling shiploader serves both berths and has a boom clearance of 22 m. (72 ft.) at shipside. Ore is stacked in a storage area and is delivered to the shiploader by conveyor belt which is loaded by either of 2 stackers having an average capacity of about 7,000 metric t.p.h. each.

TRAMANDAI (Porto Alegre): 29.59 S. 50.08 W.

(See Plan Book)

ALMIRANTE SOARES DUTRA TERMINAL: Terminal Maritimo Almirante Soares Dutra – TEDUT, is located 6 km. from Tramandai, which is 134 km. from Porto Alegre, Capital of the state of Rio Grande do Sul. The Buoys (SBMs) are positioned 1.9 and 2.4 miles from the beach and their geographical co-ordinates are:

SBM–1 (W.), Lat. 30° 00′ 40″ S., Long. 50° 05′ 42″ W.
SBM–2 (E.), Lat. 30° 01′ 06″ S., Long. 50° 05′ 10″ W.

DOCUMENTS: See "General" before first port.

PILOTAGE: Sea Pilot not required. All manoeuvres will be undertaken by the vessel's Master with the help of a TEDUT Mooring Master who will board the vessel in the anchorage area and advise the vessel's Master on all operations such as mooring, connecting hoses, unloading, unmooring, etc.

ANCHORAGE: The advisable anchorage site is 1.5 miles N.E. of SBM–2 (E.), geographical position, Lat., 29° 59′ 30″ S., Long. 50° 04′ 30″ W. Depths, 21 m. Seabed, fine sand and mud. Mooring Masters will board arriving tankers in this area.

APPROACHES: There are 3 conspicuous water towers named *Tourist*, *Agrimer* and *Tramandai*. There is also a small radar and meteorological watch steel tower nearby the pier in position Lat. 29° 58′ 34″ S., Long. 59° 07′ 18″ W. There is also, located side by side a lighthouse tower and a radio beacon steel tower, both at position Lat. 30° 00′ 27″ S. and Long. 50° 08′ 05″ W. Characteristics of lighthouse: Flash (3) group – white 12 sec. – 25 m. 15 M. Characteristics of radio beacon: Code FB–FOX/BRAVO – continuous, frequency 300 KW., range 300 miles.

RESTRICTIONS: Due to the peculiar conditions of the terminal, mooring undertaken only at daytime. Sometimes the leaving of launches seawards depends on the height of tide and the strength of the waves. Tankers may have to wait for favourable weather conditions so that mooring may safely be started.

MAX. SIZE: SBM– (W.), designed for 105,000 d.w.t. tankers, max. draft 16 m. (52 ft.). SBM–2 (E.), designed for 200,000 d.w.t. tankers, max. draft 17 m. (55 ft.). The distance between the vessel's bow and manifold must not be more than 140 m. for mooring to the SBM–1 (W.) or 180 m. for mooring to the SBM–2 (E.).

RADIO: Vessels bound for Tramandai should advise their ETA 48 hours prior to arrival direct to PPA 25 (Petrobras own radio station) as well as to their Agents (through PPR – Rio Radio – government station). In turn these stations will send messages to the terminal. Confirmation or change of ETA should be cabled 24 hours before arrival. Vessels may also contact TEDUT's radio-telephony station either in AM or SSB on the following channels and frequencies:

VHF, conventional frequencies, Channels 11, 13, 14 and 16 on 156, 55/165, 65/165, 70/156 mHz respectively.

SSB, frequencies 2182 kHz. – 2638–4125, 4379.1 – 8740.7.

Permanent listening: VHF on Channel 14 and SSB on 4125 kHz.

When within range, vessels equipped with radio-telephone should call first on Channel 16/DELTA-156.8 mHz and then change to another agreed Channel, preferably 14/CHARLIE-156.7 mHz for mooring instruction. All ETA's should indicate whether it is local time or GMT. Weather forecasts as well as Notices to Mariners are transmitted by PWZ and PPR radio stations.

PRATIQUE: Display of quarantine signal – "Q" flag – on approach Tramandai must be maintained until free pratique is granted. The National Brazilian flag should remain hoisted throughout vessel's stay in the terminal. Port doctor visits all ships on arrival and requires Maritime Declaration of Health, Deratisation Certificate, two Crew Lists. Vessels from another Brazilian port automatically receive free pratique and should not fly Quarantine Flag. If suspected disease or fever on board, it is advisable to cable Agent before arrival. Also see "General" before first port.

LAUNCHES: Mooring, unmooring and connection operations are assisted by the terminal's launches. While rendering such assistance the boats act under orders of the Mooring Master. Usually two service boats are at his disposition. Besides operational assistance they undertake transportation of Mooring Masters, personnel, Agents, ship chandlers, port authorities, etc.

ARRIVAL: Arrival time is considered to be the time the vessel reaches the anchorage vicinity or the time the Mooring Master boards the vessel, whichever occurs first. However, notice of readiness will not be considered as the time of arrival unless the vessel is in all respects ready to discharge. In the event berthing is delayed by weather conditions, tankers will be unloaded in turn. If, however, the weather is so bad that the port is closed and vessels awaiting discharge have to go out to sea, TEDUT may discharge another vessel on reopening if it arrives before the return of other waiting vessels. More rarely, the terminal Superintendent may grant priority to a particular vessel out of turn, in special circumstances only. Exceptionally, and at the discretion of the Superintendent, two tankers will discharge at the same time.

MOORING: The Mooring Master will advise on the method of securing the ship. Tankers are usually moored by two bow nylon hawsers of 15 in. diameter and 50 m. length. Vessel's messenger nylon lines are shackled – one at a time – to the pick-up wires of the chafing chains by the launch crew and hove in (through the vessel's windlass warping bollard) until the lengths of the chafing chains are brought over the vessel's roller chocks/fairleads. Ship's engines may help the lead-in ropes (vessel's messenger) in coming up to the SBM.

The following items must be observed: Anchors must be well at home and secured with stoppers and brakes. Windlass warping bollards must also be ready to lift chain stoppers, wire strops, shackles, senhouse slips, crowbar, hammer, spikes and other gear to be placed on board for mooring purpose (equipment supplied by TEDUT). Two good eye-spliced (9 in. at least) nylon hand-inlines must be be ready, at each side, on the fo'castle head, to be given to the launch, who in turn will shackle them to the hawser's pick-up wires (marked by little spar buoys).

HOSE CONNECTION: The Mooring Master will direct the terminal's working men in lifting, connecting and lowering the hoses. After the vessel is securely moored, the 16 in. floating hoses must be individually lifted to the rail by the ship's gear. Sundry hose securing and connecting equipment (strops, gaskets, nuts, bolts, wrenches, etc.) will be supplied by the terminal and put aboard the ship just after arrival. Hoses will be lifted by ship's derrick, preferably on the port side. Minimum lift of 6 tons capacity required. When wind force reaches about 8 Beaufort Scale and waves are 2.5 m. high, emergency disconnecting operation will take place, even at night time.

LOADING: Pumping must not be started without permission of the Mooring Master. The max. allowable pressure is 10 kg/sq. cm. (150 p.s.i.). While the vessel is moored, the vertical angle formed by the nylon hawsers and the sea level should not exceed 30 degrees, for safety of the SBM's turntable. When necessary, due either to excessive pitching or by being too much trimmed by the stern, pumping of ballast must be concentrated in the fore-tanks, even if interruption of unloading becomes mandatory. So the Mooring Master may require cargo to be discharged, in certain stages, either from aft or for'd compartments.

As a rule, when unloading is over, the ship should have ballast on board at least 40% of her total d.w.t. tonnage. Besides the Mooring Master himself, some terminal workmen stay aboard ship. Therefore, room and meals for one officer and six crewmen should be supplied. Upon completion of discharge the Mooring Master will require the ship to pump sea water through the submarine pipelines to displace the remaining oil.

BALLAST: No slop facilities are available for dirty ballast. Brazilian laws are very strict with regard to the pollution of coastal waters. Vessels are not allowed to discharge dirty ballast into the water. Heavy fines are imposed for violations.

Tramandai is the largest Rio Grande do Sul seaside resort and any pollution of the sea in this area will cause damage to the beaches. Hence, no dirty ballast or any oily residues must be pumped overboard within a range of over 50 miles, if no safer alternative exists.

MEDICAL: Medical treatment and/or hospitalisation, if required, are provided at Tramandai or Osorio private hospitals. Serious illness will usually be treated in Porto Alegre. Dentists are also available in Tramandai. For emergency cases (injury, etc.) TEDUT first medical aid may be requested by the Master. As usual, Agent will make such arrangements.

FUEL: Not available.

FRESH WATER: Not available.

CONSTANT READINESS: Since moorings are in open roadstead, vessel's engines and gear must be ready with full power for immediate use through the period the vessel is moored and the ship must be able to clear the mooring immediately on the advice of the Mooring Master or Superintendent of the Terminal.

Whenever necessary, vessels may use their own power to prevent riding upon the SBM.

CUSTOMS REQUIREMENTS: Brazilian laws are strict with regard to smuggling and Masters are requested to instruct their crews not to retain cigarettes in carton lots, cigars, tobacco, alcoholic drinks, drugs, souvenirs, etc. These should be collected prior to arrival, listed with the items in the slop chest and placed in the custody of the Master for deposit in the chest or closet which will then be sealed for the duration of the vessel's stay at the mooring.

By no means will any commercial transactions be tolerated, be it either among terminal employees, crew members or anyone else.

CONSULATES: No consular representatives are reported to exist in the area; however, there are consulates of most maritime nations in Porto Alegre.

TIME: Local time is GMT minus 3 hours.

GENERAL: Lighters not available. Launch connection with shore is entirely dependent on weather conditions and must be considered unreliable.

SHORE LEAVE: Not possible.

AUTHORITY: Petroleo Brasileiro, S.A. PETROBRAS.

TUBARAO 20.17 S. 40.15 W.

PILOTAGE: Pilotage is compulsory between the anchorage and the berth. Request for the Pilot must be made in advance by the ship's Agent. The vessel should indicate the time of arrival of the vessel at the entrance and from which point pilotage is required. Pilot may be contacted on VHF Channel 16 and 12.

Compulsory pilotage area is from the anchorage area where the Pilot embarks, the access channel, the manoeuvring basin and the existing piers in the port. After a Pilot receives advice of vessels arrival it takes 50 minutes for the Pilot to embark, this is done by a launch of the Vitoria Pilot Service. No difficulties are encountered when embarking except when the sea is very rough and there are strong winds.

Pilotage Area: The inner maritime area is limited by the circumference of 2.5 miles radius, centered on the Tubarao South Light in the sector included between 340° and the island Boi, as far as the berth.

APPROACHES: The access channel is 300 m. wide and dredged to 22.5 m. and runs in a 345°-165° direction. The beginning of the channel is marked by a red light buoy in position 20° 19′ 38″ S, 40° 14′ 23″ W and a white light buoy in position 20° 19′ 40″ S., 40° 19′ 35″ W. (See NHD chart 1401).

At the present time dredging is taking place to increase the depth and width of the access channel.

Tides: Tidal variation is small, on average, there being two high tides and two low tides each day. The coastal current generally runs to the south with an average speed of 1 km/hour. The current is less constant in May and June.

Manoeuvring Area: The manoeuvring area for berthing and unberthing has a width of 150 m. along the whole length of the quay, the manoeuvring basin has a diameter of 600 m. and depth of 22.5 m. Anchoring is prohibited in the access channel and the manoeuvring area except with prior permission of the Port Captain.

ANCHORAGE: The anchorage area for vessels awaiting berths is 20° 19.3′ S., 40° 15.1′ W. Vessels in quarantine must anchor in an optional area indicated on chart 1401.

MAX. SIZE: See "Berthing" and "Tankers".

HEALTH: Free pratique may be obtained by radio, the message being sent to the ship's Agent by radio via "Saportos/Vitoria" at least 72 hours prior to the vessels arrival. Declaration of health must be prepared and typed in order that it may be delivered to the doctor when he comes on board.

RADIO: Vitoria Radio Station PTV operates on the following frequencies: 2 mHz band on transmission frequencies 2086 and 2096.5 mHz and on emergency frequency of 2182 mHz.

4 mHz band – transmission frequencies 4403.9, 4382.2 and 4366.7 mHz., and on emergency frequency 4412.5 and 4143.6 mHz.

8 mHz band – on transmission frequencies 8802.6 and 8774.7 mHz, and reception on 8278.7 and 8250.8 mHz.

TUGS: Two tugs of at least 1,500 h.p. are used when proceeding from the entrance to the manoeuvring area off the berth. When berthing 4 tugs and 1 launch assist.

Name	*H.P.*	*Bollard Pull*
Vitoria	1,600	31.7
Helio Ferraz	3,000	31.7
Tubarao	1,900	29
Itabira	1,350	16
B. Horizonte	1,680	20
Cabedelo	1,680	20

BERTHING: Should a vessel be departing at the same time as another vessel is entering, the vessel which is leaving has priority and the vessel which is waiting to enter is to wait outside the entrance channel. Vessels are not permitted to pass each other in the channel or the manoeuvring basin. Should the weather conditions be poor, visibility restricted or too dark for the vessel to berth or unberth the decision to manoeuvre will be taken by the Pilot who may decide to change the operations to a more convenient time.

Pier 1: Length 390 m. useable berthing length 350 m., depth 15.2 m. Berthing is possible on both sides.

Ship Loader No. 1: Max. height of hatch coaming above sea level 12.50 m. Max. outreach of loading boom 24 m. Nominal capacity of loader 6,000 t.p.h. Vessels max. LOA 330 m. Max. sailing draft 15.20 m. plus height of tide.

Ship Loader No. 2 (Seaward side of pier): Max. height of hatch coaming above sea level 17 m. Max. outreach of loading boom 33.50 m. Nominal capacity of loader 8,000 t.p.h. Max. length 330 m. Max. sailing draft 15.20 m. plus height of tide.

Pier 2: Max. LOA permissible 350 m., depth alongside 24 m. There are 4 dolphins each with 2 hooks and 4 dolphins each with 3 hooks.

Storage Area: Old area 1.5 million tons, new area 2 million tons, factory area 30,000 tons.

This is a new pier now completed parallel and inshore of the existing pier for vessels of 250,000 d.w.t. intended max. draft 20 m. Vessels berth at seaward side only to avoid ranging. 2 shiploaders, swivelling (20 m. airdraft). Load rate 12/16,000 t.p.h. Second belt to be installed to increase load rate to 25/30,000 t.p.h. No dirty ballast facilities. Heavy fines for pollution.

Vale Do Rio Doce Co. Pier: Should Pilot wish to berth a bulk carrier on Pier No.1, South side, (Vale Do Rio Doce Co. Pier) and there is a vessel at the Petrobras Terminal, the vessel at Petrobras Terminal will be removed prior to berthing of the bulk carrier. Vale Do Rio Doce Co. Pier: Distance between dolphins – 60 m. Draft – 26 ft. Berthing of vessels up to 150 m. DWT 14,000 tons.

TANKERS: *Petrobras Terminal:* The berth consists of 2 mooring dolphins which enable vessels of 160 m. LOA and draft of 7.9 m. to berth.

STEVEDORES: Services of stevedores not normally required. Crew open hatches.

MEDICAL: Four hospitals available.

FUEL: Diesel oil in quantities up to 100 tons can be supplied by Petrobras in road tankers at the berths, also vessels with Max. draft of 8 m. and Max. LOA 160 m. can berth at the Petrobras Oil Terminal inside the breakwater to take bunkers and diesel.

Terminal Rates:

Diesel oil	– 100 t.p.h.
Fuel oil	– 150 t.p.h.
Mixture	– 80 t.p.h.
Crude oil	– 700 t.p.h.

FRESH WATER: Available at all quays of the terminal, maximum quantity per vessel 150 tons. Requests for water must be made by Ships Officers immediately on berthing. If quantity greater than 150 tons is required 48 hours notice must be given in order to establish whether or not the additional quantity is available.

POLICE/AMBULANCE/FIRE: Police Tel: 227-0057.

REPAIRS: There is a naval repair shop in the area able to carry out normal repairs.
TELEPHONES: Not available for placing on board.
AIRPORT: 8 km. from the port with connections to other cities within the country.
HOLIDAYS: Confraternizacao dos Povos, January 1st; Passion Friday movable; Nossa Senhore da Penha, movable; Tiradentes, April 21st; Labour Day, May 1st; Independence of Brazil, September 7th; Our Lady of Vitoria, September 8th; All Saints, November 2nd; Proclamation of the Republic, November 15th; Christmas, December 25th.
GENERAL:
Smoking; Smoking on tankers and obo vessels may only take place in compartments specified and as indicated by the Master of the vessel.
Readiness; Vessels must be able to unmoor immediately in cases of emergency. Unmooring is done with the aid of tugs.
Repairs; No repairs undertaken to the vessels engines or any other repairs which may impeed emergency unmooring. Should any repairs at all be necessary these can only be done with the authority of the Terminal.
Deballasting: Discharge of dirty ballast is strictly prohibited. Failure to comply with this rule will result in fines.
Fire Fighting: The ship's fire fighting equipment must be kept in readiness at all times.
Rubbish: There is no collection service.
Deratting Service: Not available.
Stores: Specialising firms in the district, orders must be placed 24 hours in advance.
Degassing and Unloading;
a) All ore/oil and oil/bulk/ore vessels must have their holds and tanks gas free.
b) Ore/oil vessels carrying inert gas must have their holds inerted to receive ore cargo and be free of explosive gas and/or rendered inert.
c) The terminal Inspector must receive, prior to loading, a certificate stating that the vessel on berthing is free of explosive gases and has been rendered/or is inert.
d) The operation of gas freeing is not permitted when the vessel is berthed or in areas deemed to be dangerous by the Terminal authority.
AUTHORITY: Captaincy of the Ports of Espirito Santo.

UBU: 20.47 N. 40.35 W. (See Plan Book)

LOCATION: The port of Ponta do Ubu is located on the coast of the State of Espirito Santo, approximately 40 nautical miles South of Vitoria. Geographic position of the Ponta do Ubu Beacon:
Latitude: 20° 46′ 48″ S.
Longitude: 40° 34′ 40″ W.
DOCUMENTS: All ships are subject to routine arrival visits by the following port officials:
Health Officers
Customs Officers
Maritime Police Officers
Immigration Authorities
Also see "Shipmasters Report".
PILOTAGE: Pilotage compulsory for all ships sailing through the channel, berthing and unberthing in Ubu. Pilots will board in the area of anchorage. Pilots attending the Ponta do Ubu area are members of the "Associacao dos Praticos do Porto e Barra do Espirito Santo" and should be ordered from Vitoria Pilot Station.

All ships must provide an accommodation ladder and rope ladder. The landing platform of the accommodation ladder should be approximately 5.0 m. above the water. Boarding facilities should be adequately lighted.

Ships should request anchoring and/or berthing instructions from Ponta do Ubu Marine Operations 4 hours prior to arrival at the pilot boarding area, or when within VHF range.

Ships must not proceed beyond specified boarding area or anchorage unless so instructed by Ponta do Ubu Marine Operations.
APPROACHES: The Ponta do Ubu area is under the jurisdiction of Diretoria de Hidrografia e Navegacao (DHN), an agency of Brazil's Ministry of the Navy. Ponta do Ubu appears on DHN Charts Nos. 70, 1400 and 1402, and on Admiralty Chart No. 3972, U.S. Hydrographic Office Chart No. 24170 and Brazilian Coast Pilot (Roteiro)
Lights in the Vicinity:

Ilha Escalvada (Island)	Gp. fl. (2)	6.0 sec.
	27 metres	9 miles
	Lat. 20° 42′ S.	Long. 40° 24′ W.
Ilha do Frances (Island)	Fl.	3.0 sec.
	48 metres	12 miles
	Lat. 20° 56′ S.	Long. 40° 45′ W.
Ilha Branca (Island)	Fl.	10.0 sec.
	5 metres	9 miles
	Lat. 21° 00′ S.	Long. 40° 48′ W.
Ponta do Ubu	Lat. 20° 46′ 48″ S.	Long. 40° 34′ 40″ W.

Channel: See DHN Chart No. 1402 as amended by Aviso aos Navegantes (Notice to Shipmasters) No. 141/77. Maintained channel depth is 18.0 m. (59 ft.) referred to chart datum.
ANCHORAGE: Anchorage instructions must be requested from Ponta do Ubu Marine Operations. Anchorage area position is Latitude 20° 46′ 24″ S. Longitude 40° 32′ 33″ W. Masters are advised to give due consideration to Brazilian antipollution regulations while in coastal waters.

Brazilian Government officials may board ships in anchorage for clearance formalities. Suitable and adequately secured accommodation ladder for this purpose must be provided soon after anchoring. Life ring with line with a minimum length of 50 m. should be on hand and adequate lighting provided.
RESTRICTIONS: Daylight berthing only.
MAX. SIZE: Ships arriving in ballast are requested to comply with the following recommended arrival drafts, keeping in mind indicated shiploading rates and shiploader clearance height limitations.
Recommended Arrival Draft

Deadweight *Tons*	*Metres*	*Feet*
30,000 to 40,000	6.1 — 6.7	20 — 22
40,000 to 60,000	6.7 — 7.3	22 — 24
60,000 to 75,000	7.3 — 7.9	24 — 26
75,000 to 100,000	7.9 — 9.1	26 — 30
100,000 to 150,000	9.1 — 11.0	30 — 36

Ships unable to meet these suggested drafts due to insufficient ballast capacity, anticipated deballasting problems, etc., should so advise in 48-hour ETA message, along with estimated deballasting time.
RADIO: Rio de Janeiro Coast Radio Station, call sign "PPR" (Telex 491) operates on a 24 hr. basis on the following frequencies: 435 kHz, 8,634 kHz, 13,105 kHz.

The Master of an arriving vessel is required to cable his notice of ETA 15 days (or when departing prior port, if sailing distance is less than 15 days) then 5 days, 48 hours, and 24 hours prior to estimated time of arrival at Ponta do Ubu.

Five day message shall contain ETA, cargo tonnage required by hatch number and whether vessel is O.B.O. or ore/oil carrier.

48 hours message shall provide the following information: ETA, arrival draft, ballast tonnage on board and deballasting time.

24 hours message. Cable your ETA, indicate if vessel is fitted with an inerted system and if compartments will be under control of said system during loading. Also include type, manufacturer's name and the society that approved the classification of the inert system.

When within VHF range, Master is to contact the Marine Manager's office for additional information on docking schedule, anchorage arrangements and cargo information.
VHF: Ponta do Ubu Marine Operations is equipped with VHF radio monitored 24 hours a day.
Frequencies:
Calling Channel: 16 (156.800 mHz)
Working Channels: 156.300 mHz, 156.375 mHz,
156.650 mHz, 156.700 mHz.
HEALTH: Radio Pratique should be requested 72 hours prior to arrival, by forwarding quarantine message to Port Health Authorities through the ship's Agent. The information required is as follows:

Name and nationality of vessel; name of the last port of call; port of destination and name of Agent; nature of cargo, if any; date and place of last derating or exemption certificate; number of crew and passengers; health conditions of all on board; vaccination status of crew and passengers; ETA and any other information that may be required by the quarantine officers.

Radio pratique does not constitute quarantine clearance, and the ship will require inspection upon arrival. Radio pratique if granted, will enable ship to enter, berth, and commence loading prior to official quarantine clearance.

The following documents shall be submitted to the Port Health Authority boarding on arrival:

Maritime Declaration of Health, duly filled in as required by Sanitary Regulation No. 2 of the World Health Organization. Copy of up-to-date crew list. Vaccination Certificates of all Crew members as well as their seamen's books or passports.

Quarantine inspection will be carried out at the pier, or at anchorage if required, weather permitting.

Masters are advised to have all vaccination certificates, deratization certificate and clearance from last port ready for inspection.
TUGS: Tug service is compulsory for all vessels at Ponta do Ubu. Tugs will operate in accordance with Brazilian regulations covering this matter.

Available tugs: 3×1,680 h.p., 20 ton bollard pull, tugs permanently based at the terminal. 1 tug of the same type on call.

All ships should be equipped with wire cable tow line with nylon pendant.

All communication between tugs and Pilots is via VHF.

Tugs will operate on the same Channel as the Marine Operations office.
BERTHING: The port of Ponta do Ubu is owned and operated by Samarco Mineracao S.A., and is used solely for the purpose of handling and shipping iron ore.

The port consists of a breakwater protected pier, close to the shore with a dredged berth area and access channel.

Product stockpiling and transportation prior to loading: A bucket wheel stacker-reclaimer and a stacker operate in a 1,200 ft. long stockpile area. The stockpile has a total capacity of 550,000 metric tons of pellets and 385,000 metric tons of pellet feed.

During normal operations, pellets are stockpiled by the stacker-reclaimer, and pellet feed stockpiled by the stacker. Both pellet feed and pellets are reclaimed using the bucket wheel stacker-reclaimer. The reclaimed material is then conveyed to the shiploader for loading aboard bulk carriers, at rates of up to 8,000 metric t.p.h.

When reclaiming pellets, the output from the pellet plant is bypassed through the stacker-reclaimer and combined with the reclaimed pellets for shiploading. When reclaiming pellet feed, the output from the pellet plant is conveyed to the stacker, while the pellet feed output is conveyed to the stacker-reclaimer, bypassing the machine and combined with reclaimed pellet feed for shiploading.

A sample station is provided to monitor the quality of pellet feed or pellets being loaded into a given ship statistically. Samples are automatically cut from the shiploading conveyor system at preset intervals, without interrupting the loading operation. Each sample is then reduced in size, and subjected to a complete range of quality control tests.

Material reclaimed for shiploading by the stacker-reclaimer is conveyed to a rail-mounted travelling shiploader. The shiploader is designed to load vessels on either side of the pier. A loadout weigh scale located near the shiploader monitors the final product delivered for shipment.

Port facilities: Port facilities at Ponta do Ubu are located in the open sea near the apex of a shallow indentation in the coastline where currents have provided 20 m. deep water within 2 km. of the shore.

The existing depth of water in the 200 m. wide dredged channel is minus 18 m. The main berth area was dredged initially to minus 19 m.

Berthing: The breakwater protected pier consists of a 313 m. long by 22 m. wide concrete deck, extending in a 022° 30′ direction. It projects from the Eastern portion of the breakwater to a distance of 685 m. from the shore.

The pier has berths on both East and West sides.

Shiploading: The mobile rail mounted pier shiploader has a 41.6 m. fixed length boom, with a 280° turning angle and a 25 m. air draft. Its nominal loading capacity is 8,000 metric t.p.h.

LOADING: Vessels will be generally loaded in turn, in their order of arrival, provided that:

(i) They are in all respects ready to receive cargo;
(ii) All the cargo is available at the terminal;
(iii) It is in accordance with the instructions of the charterer or his Agent.

Vessel shall present a detailed loading plan immediately on arrival, including hatch quantities, with loading sequence and quantity of ore to be reserved for fore and aft trimming by hatches.

Ships will leave berth immediately on completion of loading, unless specific permission to do otherwise has been granted by Marine Operations.

Loading hours, subject to change, are as follows: 24 hours operation, Sundays and holidays included.

All ships *must secure bilge systems* while at Ponta do Ubu.

Combination ore/oil and ore/bulk/oil carriers must ensure that ballast tanks and piping systems are free of oil contamination, prior to arrival. Gas-free condition of combination carriers must be confirmed prior to loading. Certification and inspection shall be arranged through the vessel's Agent. Vessels with inerted tanks shall be checked and monitored continuously during loading.

MEDICAL: The medical facilities nearest to Ponta do Ubu are located at Guarapari, 15 mins. away by car.

Vitoria has modern hospital facilities.

FRESH WATER: Not available.

FUEL: Not available.

TIME: Local time is GMT minus 3 hours.

AIRPORT: Guarapari (20 km.) for light aircraft (air taxi).

Vitoria (70 km.) Airport Eurico Sales, connection to other Brazilian towns.

POLICE/AMBULANCE/FIRE: Police (Guarapari) Tel. 261-4051.

SERVICES: There are supermarkets at Guarapari.

HOLIDAYS: *Local holidays:* Confraternizacao dos Povos – 1st January; Passion Friday – movable; Tiradentes – 21st April; Labour Day – 1st May; Sao Pedro – 29th June; Independence of Brazil – 7th September; All Saints – 2nd November; Proclamation of the Republic – 15th November; Day of the City and Day of Our Lady of the Conception – 8th December.

REPAIRS: No facilities.

TELEPHONES: No facilities for placing telephones onboard.

GENERAL: The Brazilian National flag shall be flown while in the Ponta do Ubu area.

Quarantine flag must be flown until free pratique is granted.

Line-handling port personnel will be available for handling ship's lines during berthing and unberthing. All shipboard work necessary for berthing, loading and unberthing, including, but not limited to, handling and tending moorings, opening and closing hatches and normal deck cleanup, shall be performed by the ship's crew.

Ships must have main engines ready and maintain watch while alongside the pier, unless specific permission to do otherwise has been granted by Marine Operations.

The nearest town is Guarapari, 15 minutes to the North by car. Vitoria, capital of the State of Espirito Santo, is about 80 minutes by car to the North. Daily flights, operated by major Brazilian airlines, connect the state capital with the rest of the country.

Ships causing oil pollution, dumping of waste, refuse, etc., in coastal waters will be liable for all resulting fines and cleanup costs. All ships must secure bilge systems while in the Ponta do Ubu area, and combination ore/oil and ore/bulk/oil carriers must exercise all precautions necessary to insure that ballast tanks and/or piping systems are free of oil contamination prior to arrival. *Accidental and deliberate oil or oily mixture discharges in the area must be reported to Ponta do Ubu Marine Operations IMMEDIATELY.*

There are no shore facilities available at the terminal for receiving slops, and dirty or contaminated ballast. Masters are cautioned that discharging of anything other than uncontaminated ballast will be subject to penalties as prescribed by Brazilian law.

Solid garbage and refuse disposal ashore can be arranged through Marine Operations.

Weather conditions and temperatures are moderate with year-round average highs of 27°C (80°F) and year-round average lows of 19°C (66°F).

Winds recorded are less than 30 knots more than 95% of the time and prevailing winds are East to N.E. Local winds may have a significant effect on the tide.

There are no significant currents noticed in the turning basin.

For general information about currents in the Ponta do Ubu area, use South Atlantic Pilot Charts and Brazilian Coast Pilot (Roteiro).

Sea conditions are generally moderate.

Meteorological bulletins are available 24 hours a day through Rio de Janeiro coast radio station, Radio Arpoador, call sign PPR. 17,194 kHz.

SHIPMASTERS REPORT: January 1978.

This report to be read in conjunction with the entry above.

Documents: Please refer to other Brazilian ports, vessel came from Rio de Janeiro so only the Agent and the Customs boarded and asked for 3 Crew Lists, 1 Custom Store List and 1 Personal Effect List. We were told that to go ashore every Crew member needed a pass with picture attached but crew went to the near town of Guarapari after showing passport or an identity card at the gate.

Pilotage: The Pilot boards about 2 to 3 miles outside the channel. He comes on board by 1 of the 3 tugs based at Point Ubu and even though we were in very light condition wanted to use the pilot ladder. Pilots come from Tubarao and Vitoria.

Restrictions: Until now the maximum draft allowed on arrival at all times has been 11 m. while the maximum sailing draft is 16.5 m. at high water in fair weather. The Pilots Association have asked for buoys No. 13–11–9–7 to be removed from their actual position and only buoy No. 9 to be placed in front of the 9.8 m. patch. They say that numerous soundings over the patch always show 11 m. so 9.8 m. does not exist. The Pilot told me that these changes might take place around March/April 1978, but nothing certain.

Tugs: Three tugs are based at Point Ubu namely the "Scorpius", "Polaris" and "Aquidauana". The first 2 are good and operate respectively on the bow and stern of the ship with 2 ship's nylon ropes. If vessel over 200 m. in length the Port Captain orders a fourth tug that must come from Tubarao (about 3 hours) and it is very helpful and powerful.

VHF: Marine Operations answered us about 2 hours from the berth (30 miles).

Bulk Cargo Facilities: We were the sixth ship to load in this port, the loading rate is around 4,000/5,000 t.p.h. at present.

Medical: Ship's Agent can arrange to send people to the doctor at any time or to the hospital in the near town of Guarapari.

Density: Checked over 3 days and always found to be 1026.

Loading: The Bill of Lading figures are taken from the weightometer which is believed to be extremely correct, but it showed a difference of 1,000 long tons over 37,000 long tons loaded on the ship. A surveyor carried out a draft survey on arrival and it was said that it was a check on the weightometer, being normal check that was carried out for these early loadings but the real figures are taken from the weightometer. 2,000 long tons before completion of loading we stopped for trimming and the scale showed about 1,000 long tons more loaded than the ship's figures. Because of this, the Terminal considered the ship's figures (survey) and to these figures they added according to the scale the quantity we requested to complete loading.

Note: The Vitoria Port Captain requires Masters of all vessels arriving at Point Ubu to agree and sign following letter which Pilot presents to Masters on arrival prior to berthing: "The Point Ubu departure channel which is dredged to minus 18 m. is well marked by buoys however for inbound vessels the boundary of the turning basin which has a minimum depth of 12 m. at datum is presently not marked. Your vessel will be turned with the help of tugs in the port of Point Ubu in order to dock starboard side to in the inside berth. During this manoeuvre it is possible that the bow of your vessel might pass beyond the present location of buoys 5 and 7. You should not be alarmed by this as the area is well within the turning basin for inbound vessels. In fact there is sufficient water for vessels entering in ballast on both sides of the marked channel. Should you wish to confirm the water depth the Pilot has the latest soundings". Prior arrival Point Ubu cable "Capimar Vitoria" ETA and confirmation of acceptance all contents in letter. Port Captain will delay entrance unless above instructions are followed.

OPERATORS: Samarco Mineracao S.A.

Ponta do Ubu: Postal address: Caixa Postal 205, 29.200 Guarapari, E.S. Brazil. Tel. 261-4023, 261-4024, 261-4112, 261-4110; Area code* 027. Telex 272204.

Central Office: Avenida Carandai, 1115, 18th floor, 30.000 Belo Horizonte, MG, Brazil. Tel. 222-4022; Area code*; 031. P.O. Box: C.P. 1317. Cable address: Samarco. Telex 031-1474.

Rio de Janeiro office: Avenida Nilo Pecanha, 50, 5th floor, Suite 510, 20.000 Rio de Janeiro, Brazil. Tel. 222-9756, 224-8306, 224-3935. Area code*: 021.

*Code for Brazil: 0055.

VITORIA 20.19 S. 40.20 W.

DOCUMENTS: See "General" before first port.

PILOTAGE: Compulsory. Vessel approaching port should communicate with Agent through local radio station, giving date and hour of arrival at Pilot station so that they can arrange for a Pilot to be at the roads on arrival. Communicate direct to Pilot Association through VHF Channel 16. Pilots maintain 24 hour watch.

ANCHORAGE: The official limits of the port are:

Arc of a circle of 1 mile radius, seaward, with centre at Santa Luzia Lighthouse. There is a 8.9 m. patch which will be removed in the near future.

Notice of Readiness is accepted as at time the Master radios advising vessel has anchored, SHINC, lay time starting 3 hours afterwards (subject to C/P).

No draft limitations at anchorages.

APPROACHES: Length of access channel 3.5 miles, width 120 m., depth 13.0 m. Maximum speed allowed 5 knots.

RESTRICTIONS: All sailings are to take place on a rising tide. Vessels of up to 205 m. can enter day or night.

Vessels from 205 to 240 m. can enter during daylight hours, weather permitting. Vessels of this length must be assisted by 3 tugs, 2 of which must be of at least 1,000 h.p. and the other of at least 400 h.p.

For turning in the manoeuvring basin, 2 tugs are required, 1 to be of at least 1,000 h.p. and the other of at least 400 h.p.

MAX. SIZE: 36 ft. draft at HW and 32 ft. at LW. Also see "Tankers" and "Developments".

HEALTH: Free pratique obtained by radio to Agents, addressed for "Saportos Vitoria" followed by ship's name, last port, ETA, and the letters ZT (meaning "my replies to the 6 questions on the port health declaration are negative"), and ZS (meaning "the sanitary condition of my ship is satisfactory"). Pratique is granted when this message is delivered by Agent to the port doctor. Also see "General" before first port.

The Agent may send a reply containing the group ZY, meaning "you have free pratique". In any case the time of pratique is registered as time that the ship's cable was received by the Health Authorities. This pratique does not allow the crew to go ashore until after customs clearance.

Crew vaccinations are done free.

The Port Doctor usually arrives onboard some time after the visit of Authorities and it is important to have the Health Declaration ready for handing to him by a responsible person (to avoid a fine).

RADIO: Local radio station, Vitoria Radio, call sign PPT. This radio station normally used by Agents when cabling vessels.

Operating Frequencies:

2 mHz band on transmission frequencies 2086 and 2096.5 mHz and on the emergency frequency of 2182 mHz.

4 mHz band – transmission frequency 4403.9, 4382.2 and 4366.7 mHz on the emergency frequency 4412.5 and 4143.6 mHz.

8 mHz band on the transmission frequencies of 8802.6 and 8774.7 mHz. and reception 8278.7 mHz and 8250.8 mHz.

VHF: Request Pilot on Channel 16 and 12 one hour before arrival. Upon notice it then takes Pilot 40 minutes to reach vessel.

TUGS: Tugs join vessels at anchorage. Ship's lines used. Tugs have no lines on board. The lines given to tug-boats should be without wire as the swell usually prevailing causes severe sudden stresses on the tow lines.

2 tugs of 1,680 h.p., (20 tons) and 4 tugs of 1,600 h.p. (22 tons).

Vessels up to 2,000 g.r.t. require 1 tug, up to 10,000 g.r.t. require 2 tugs and over 10,000 g.r.t. require 3 tugs for berthing.

Vessels up to 2,000 g.r.t. require 1 tug and vessels over 2,000 g.r.t. require 2 tugs for unberthing.

BERTHING: Also see "Developments".

Commercial Quay: No restrictions for vessels berthing at Nos. 4 and 5 warehouse, entrance and sailing at any stage of tide. Max. drafts are:
No. 5 warehouse – 28 ft., max. length 597 ft. 2 in.
No. 4 warehouse – 26 ft., max. length 597 ft. 2 in.
No. 3 warehouse – 24 ft., max. length 508 ft. 9 in.
No. 2 warehouse – 14 ft., max. length 393 ft. 9 in.

Vessels at Nos. 2 and 3 restricted to sail on flood tide only.

Usiminas Quay – Coal Discharge: Max. draft 35 ft., max. length 853 ft. Limited to entry only at beginning of ebb tide; sailing at any stage of tide. Discharge by 2 mechanical grabs, daily unloading rate, 8.400 LT.

Iron Ore Berths:

Atalaia Quay: Max. draft 36 ft., max. length 787 ft. 5 in. Vessels berth and sail on flood tide. Entering and sailing during night or day; max. length 657 ft. 10 in. during the day only, 787 ft. 5 in.

Paul Quay: Max. draft 31 ft., length (as for Atalaia). There is one loading area with a capacity of 600/900 t.p.h. depending on type of ore. Max. reach beyond quay edge, 49 ft. Max. height extremity of hook at 18 in. elevation, 52 ft. at HW, 59 ft. at LW. Width of pontoon, 14 ft.

CRANES: Twenty-three electric gantry cranes 1.5-12.5 tons capacity, 5 mobile cranes 10–30 tons capacity and 2 heavy lift cranes 100 ton capacity.

TANKERS: *Esso Terminal.* Berthing and unberthing can take place during day or night period, provided vessels draft does not exceed 22 ft. Max. length permitted 524 ft. 11 in. with max. draft of 27 ft. Vessels must enter on ebb tide and sail at high tide.

Texaco Terminal. For ships discharging for Shell, Atlantic and Texaco. Discharge handled through a common line, except for fuel oil, handled on a separate line. All lines 6 in. du. Max. pressure from shore 80 lb. producing average discharging rate of 1,500–2,000 b.p.h. Vessels may enter or sail on any daylight tide, max. draft permitted 32 ft., max. length 597 ft.

STEVEDORES: On ETA cable general cargo ships should include number of gangs required.

MEDICAL: No advance notice of required medical attention. Hospital facilities available.

DENSITY: Average density at Vitoria 1025. Somewhat lower during rainy season.

FRESH WATER: Fresh water available at Commercial Quay, Vitoria iron ore berths, Usiminas Quay and Esso Terminal. Rate of delivery 30 t.p.h.

A barge with capacity of 50 tons may be adapted to carry water.

FUEL: *Esso Berth.* Bunkers can be taken here, supplied under gravity only.

Max. draft 27 ft., and length restricted to 164 m. Due to various factors, the taking of bunkers in Vitoria is not recommended, however, fuel is available by road tanker at the Commercial Quay. Rate 10,000 litres/hour.

Esso and Petrobras can supply Bunker "C", fuel oil and diesel oil, the last 2 being available by truck.

DEVELOPMENTS:

Capuaba Quay:

The Capuaba Quay is in its final stages of completion, with silos and refrigeration installations.

Cold Store: With capacity of 5,000 tons in its first phase, and 15,000 tons in its final capacity, intended for refrigerated storage of general (meat and juices).

Silo: With capacity of 30,000 tons in the initial stage and 90,000 tons in its final phase, it will be equipped with cleaning, drying, classification, weighing and bagging equipment.

It has an 84 m. tower, made of blocks of cells 60 m. high and 8.5 m. diameter. It can take cereals, (maize, soya, sorghum) at the rate of 600 t.p.h., and delivery at the rate of 1,200 t.p.h., and can, in the case of imported wheat, receive at the speed of 300 t.p.h. With 765 m. of quay, Capuaba will also deal with the exportation of industrial products, such as cellulose, metal products and general cargo. The installations include warehouses, for metals of 7,500 sq.m. and general cargo 4,000 sq.m., there is also open area storage of 45,000 sq.m. for containers. The port installations at Capuaba, expected to be completed shortly, will enter operation with 180 m. of quay, and a general cargo warehouse for the export of cellulose.

Capuaba Quay: (already installed).

Length of quay: 655 m. Depth: 13 m.
Cold store: capacity of 15,000 tons.
Metals warehouse: area of 7,500 sq.m.
General cargo warehouse: area of 4,000 sq.m.
Storage open area: area of 45,000 sq.m.
Road and rail access.
Length of roadway: 3,120 m.
Width of platform: 16 m.
Length of bridge over River Aribiri: 126 m.
Length of railway: 660 m.
Port Silo capacity: 30,000 tons in the first phase and 90,000 tons in the final phase.
Purpose: export of cereals (soya, maize and sorghum) and importation of wheat.
Operational speed: 1st phase: 1,200 t.p.h.
2nd phase: 1,800 t.p.h.
Cells: 8.5 m. diameter and 60 m. high.
Elevation tower: 84 m. high.
Belt transporter: 800 m.

WATCHMEN: Compulsory at commercial quay in Vitoria. Not available at Vitoria Ore Terminals.

OPENING/CLOSING HATCHES: Normally done by stevedores except in cases of modern vessels using MacGregor hatch covers, when crew asked to close hatches.

CUSTOMS ALLOWANCES: Each Crew member allowed 200 cigarettes out of the bond. One bottle, wine or spirits opened, for each Crew member.

REPAIRS: Deck and engine repairs available.

REPATRIATION: There are 3 flights daily from Rio de Janeiro to Vitoria.

AIRPORT: Airport located 8 km. from centre of town and is served by 3 airlines with daily flights to Rio de Janeiro, Salvador, Recife.

TIME: Local time GMT minus 3 hours. Summertime usually 1st November up to 31st March when time is GMT minus 2 hours.

HOLIDAYS: January 1st; April 21st; May 1st; September 7th and 8th; November 2nd and 15th; December 25th; Good Friday; Nossa Senhora da Penha and Corpus Christi. Only holiday when no stevedore work is possible Good Friday; exception made to iron-ore loading.

WATCHMEN: Not compulsory but available.

IDENTIFICATION CARDS: Required with photographs to enable officers and Crew members to go ashore. Agents supply forms.

CONSULS: The following countries have consular representatives in Vitoria:

Great Britain
Argentina
Belgium
Finland
Holland
Italy
France
Lebanon
West Germany
Portugal
Uruguay

POLICE/AMBULANCE/FIRE: Police 290, Maritime Police 3-0173; Radio Patrol 7-0992; Ambulance 2-4646; Emergency Hospital 3-0203; Fire Brigade 3-0202.

TELEPHONES: No facilities for placing telephones on board.

AUTHORITY: Captaincy of the Ports of Espirito Santo, Directorate of Ports and Coast.

Port administered by Espirito Santo Dock Company S.A.

Brunei State

BANDAR SERI BEGAWAN: 04.53 N. 114.56 E.

Brunei State is an independent country governed by H.H. the Sultan with a Council of Ministers and Legislative Assembly, under British protection. The capital town of Bandar Seri Begawan (formerly known as Brunei Town) is situated 16 miles upriver from Muara Harbour which is at the mouth of the Brunei River. Use of the town wharf at Bandar Seri Begawan is restricted to small wooden coastal vessels operating within the Brunei Bay area not exceeding 80 ft. in length overall and 50 tons gross registered tons. The port of Bandar Seri Begawan comprises a reinforced concrete wharf 730 ft. long with a wharf apron 76 ft. wide and a passenger pier 124 ft. long with a wharf apron 63 ft. wide. Three transit godowns are provided.

MUARA PORT: 05.01 N. 115.04 E. (See Plan Book)

PORT LIMITS: The sea area within Lat. 4° 58′ N. and 5° 05′ N. and Long. 115° 03′ E. and 115° 10′ E.

DOCUMENTS:

Two Crew Lists.
Two Passenger Lists.
Two Dangerous Goods Lists.
Two Manifests.
One Health Document.

PILOTAGE: Application for Pilot 24 hours in advance by telegraph through ship's Agents. Pilot boat awaits at Beacon No. 1, Lat 5° 03.5′ N., Long. 115° 06′ E. Pilot boat painted white with green awning. If on arrival No. 1 Beacon pilot boat not visible then ships should call "Muara Port" on VHF Channel 16. Pilotage compulsory and available daylight hours only. Vessel should anchor in vicinity No. 1 Beacon awaiting Pilot.

ANCHORAGES: Safe anchorages available vicinity No. 1 Beacon, S.E. of Tanjong Sapo Light (Lat. 4° 59.7′ N. Long. 115° 07.6′ E.) and in Muara Harbour 4 cables SSW of wharf.

RESTRICTIONS/MAX. SIZE: Entrance to Muara Harbour restricted to daylight hours only at present. Minimum depth in dredged channel 28 ft. ACD. Maximum length of vessel 600 ft.

RADIO: Messages to Agents through Singapore or Miri Radio.

VHF: Ports Department VHF Channels 11, 12, 13, 14 and 16 in operation Mondays to Thursdays and Saturdays from 0730 to 1600 hrs. local time. Fridays, Sundays and Public Holidays from 0800 to 0900 hrs. and 1300 to 1400 hrs. local time. Call sign "Muara Port".

RADAR: No port radar service available.

TUGS: No tugs normally available.

BERTHING: Marginal wharf 1,400 ft. long with depth 30 ft. ACD alongside. Mobile shore cranes available up to 30 tons capacity.

STEVEDORES: Provided by ship's Agents from private mandores. Major commodities general cargo and cement, oil well cement and tubulars.

MEDICAL: Hospital available 16 miles distant from port. Port Health Clinic outside port main gate.

DENSITY: Salt water.

FRESH WATER: Readily available at wharf, cost Brunei $4 per 1,000 gallons.

FUEL: High speed diesel available in small quantities.

CONSULS: There is a British High Commissioner in the town of Bandar Seri Begawan 16 miles distant from the port.

REPAIRS: Minor deck and engine room repairs possible.

DRY DOCKS: None.

SURVEYORS: Lloyds and American Bureau are represented.

GANGWAY/DECK WATCHMEN: Not compulsory but available through Agents on request.

HATCHES: Opening and closing by crew or stevedores at ship's option.

CARGO GEAR: Loading/discharging normally effected by ship's gear but 30 tonne capacity mobile crane available from Ports Department on request. Slings, nets, tarpaulins, 30 ton capacity low loader and container platform trailer available from Ports Department.

REPATRIATION: There is no Shipping Office but ship's articles are countersigned by the Director of Marine on request.

AIRPORT: International airport 12 miles distant from port. Regular services to Singapore, Hong Kong, Manila and direct flights once weekly to United Kingdom.

TIME: Local time is GMT plus eight hours. No alterations in clocks throughout year.

POLICE/AMBULANCE/FIRE: Police 333. Ambulance 9.2366. Fire 255.

TELEPHONES: Available on request at Berths Nos. 1 and 5.

SERVICES: Diver available, cold store facilities available.

SHORE LEAVE/IDENTIFICATION CARDS: After clearance inwards Crew members are allowed ashore if in possession of discharge book, identity card or passport.

HOLIDAYS: Hari Raya Puasa, Hari Raya Haji, Chinese New Year (all dates moveable) Christmas Day. Work can usually be arranged on all holidays with exception of Chinese New Year when direct delivery to vehicles only available.

AUTHORITY: Controller of Ports, Muara.

SERIA, Brunei: 04.43 N. 114.19 E. (See Plan Book)

SHIPMASTER'S REPORT

LOCATION: SBM in position Lat. 04° 42′ 50″ N., Long. 114° 18′ 54″ E.

DOCUMENTS:

International Maritime Declaration of Health.
6 copies of Crew List.
4 copies Crew Vaccination List.
Clearance from last port.

If vessel is stemmed for Japan, 6 extra copies of Crew Lists are required from non-Japanese flag vessels.

PILOTAGE: Compulsory. Berthing possible day and night, any stage of tide. The berthing Master will board incoming vessels about 2 miles N.N.W. of the SBM. Masters are requested to provide a good lee for launch to facilitate the boarding of the berthing Master and lifting on board of mooring equipment.

Derrick to be rigged and topped on starboard side prior to arrival. The pilot ladder should be rigged well aft on the starboard side. The accommodation ladder is not required.

ANCHORAGE: A tanker anchorage is located approximately 3 miles North of the SBM. In the area contained by the following limits: Lat. 04° 45′ N. and 04° 47′ N., Long. 114° 17′ E. and 114° 19′ E. Controlling depth is 80 ft. at MLW, mean tidal range 6 ft., velocity of current 0.5-1 knot. Nature of bottom is mud.

MAX. SIZE: Max. d.w.t. 200,000 tons. Draft 65 ft.

PRATIQUE: Available day and night. Immigration and Customs do not board. A detailed shipping report has to be completed for the Government Marine Department. Agent will provide the forms for completion.

If the vessel arrives from an infected port or its state of health is suspect, the Medical Officer may board in order to inspect crew and relevant international medical certificates.

RADIO: Confirm ETA at least 48 hours in advance also declaring Bill of Health and Quantity of Cargo required. W/T traffic should be passed through Singapore Radio, and addressed to Agent. When within range, vessels are requested to make direct W/T contact with Brunei Shell Petroleum Company (call signal BSP ONE) at the following local times (GMT plus 8 hours) 1000 hrs., 1400 hrs., 1800 hrs. B.S.P. will transmit on 8558 kHz call signal BSP ONE and listen out on 8354 to 8374 kHz. When contact is made on this frequency a standard information cable will be transmitted to the ship. Accurate ETA's are very important as mooring launches may be required to put to sea as much as 12 hours before a vessel is expected. A VHF station at Seria (call signal BSP ONE) maintains a continuous watch on Channel 16 with Channel 19 as a working Channel. Contact with this station also can be made on Shell Private Channel, transmitting on 162.9 mHz, receiving on 158.3 mHz.

Standard Information Cable to Incoming Tankers from Station BSP-1

TO: Master S.S./M.V. ....

You will be berthed on arrival/delay of.............................. hours expected before berthing due awaiting berth/shortage of cargo.

Our instructions from London are to load you with full/part cargo Seria Light Crude tons.................................. destination ......................A.P.I. .... Loading Temperature ....degrees Fahrenheit Max. loading rate 5,000 t.p.h. vessel moored to single buoy mooring. On arrival have 5 ton derrick rigged and topped starboard side for lifting mooring equipment and connecting 2×12″ hoses. Mooring to buoy is with 2 lines provided by terminal. You should have rope messenger available on Forecastle. Mooring and hose connection is by ship's crew. Contact BSP ONE on VHF Channel 16 approx. 40 miles range and advise your ETA. Please acknowledge. BRUNSHELL

TUGS: None available.

MEDICAL: Doctor available.

TANKERS: *Berth:* A single buoy mooring with two 645 ft. floating hose strings. Each hose string consists of 16 in. hoses terminated by a 16 in. flange for connection to the vessels manifold. We used a 16 to 12 in. shore reducer.

Mooring: two 15 in. circumference 110 ft. nylon mooring lines from the buoy are secured on the forecastle head, using equipment provided by the terminal. A suitable rope messenger should be ready for use, preferably a standard mooring rope. Mooring is carried out by ship's crew.

Hose connection: Starboard side amidships. Hose derrick should be rigged and topped to lift least 8 tons and vessel to have appropriate reducers fitted for connecting two 16 in. manifold hoses. Hose connecting is carried out by the vessel's crew.

Shoreline: The submarine pipe-line is 32 in. diameter and 30,000 ft. in length.

Loading rate: The maximum loading rate of Seria light crude is 4500–5000 t.p.h. (approx. A.P.I. 39.4).

There are no facilities available for dirty ballast. Vessels must arrive with clean ballast, lines and pumps. The controlling depth at the berth is 73 ft. at MLW, tidal range 6 ft., velocity of current 0.5 to 1 knot and the nature of the bottom is mud.

DENSITY: 1020–1025.

FRESH WATER: Not available.

FUEL: Not available at Seria, may be obtained at Lutong (Miri).

REPAIRS: Small emergency repairs may be carried out in Brunei Shell Petroleum company workshops.

SERVICES: Stores, laundry services and shore steam not available.

TIME: GMT plus 8 hours.

REGULATIONS: Smoking is permitted only in places jointly approved by Master and Mooring Master. No smoking allowed on the open decks. Galley fires allowed if of approved type.

The Brunei National flag should be flown during hours of daylight. The vessel's radio station must not be used whilst at the SBM. Vessels are not permitted to immobilise main engines whilst at the berth.

GENERAL: Ship to shore communication during loading is by portable R/T. No shore leave. Shore personnel remain on board during loading operations.

TANJONG SALIRONG: 04.53 N. 115.06 E.

The log-loading anchorage at Tanjong Salirong is situated 12 miles above the Outer Bar at the mouth of the Brunei River. Vessels of up to 21 ft. draft may cross the bar at high water.

DOCUMENTS: *(a)* To be produced on arrival:

Marine Department
Boarding Report.
1 Crew List.
1 Passenger List.

Customs Department
2 Inward Manifests.
1 Crew List.
1 Passenger List.
1 Port Clearance.
1 Stores List.
1 Arms List.

Agents
2 Inward Manifests.
1 Crew List.
1 Passenger List.
2 Hatch Lists.
1 Arms List.

(b) To be supplied before ship's departure:

Customs Department
1 Outward Manifest.
1 Passenger List.
1 Crew List.
1 Export Declaration.

Immigration Department
1 Passenger List.
2 Crew Lists.

Vessels
2 Outward Manifests.
Port Clearance.

PILOTAGE: *Bandar Seri Begawan:* Pilotage is not compulsory. If a Pilot is required by a vessel proceeding to Bandar Seri Begawan a written request must be made at least 24 hours before ship is scheduled to arrive. This must include position where Pilot is required to embark (i.e. at Outer Bar or Sapo Point).

Muara Harbour: Pilotage is compulsory. Application for a Pilot for entering Muara Harbour must be made by written request at least 24 hours before arrival. Pilots board vessels in Brunei Bay at the Northern end of the entrance channel through Pelompong Spit.

Tanjong Salirong: Pilotage is not compulsory. If a Pilot is required for vessels loading logs at Tanjong Salirong then application must be made 24 hours in advance of arrival stating position where it is required for Pilot to embark (i.e. at Outer Bar or Sapo Point). A Customs Officer and Agent's clerk will proceed to Tanjong Salirong from Muara Harbour or Bandar Seri Begawan and will remain on board whilst vessel is loading, accommodation and food provided by ship. Stevedores and tally clerks provide their own food.

ANCHORAGE: Vessels entering Muara Harbour without berthing space will be anchored 5 cables S.S.W. of wharf. If so desired ships may discharge perishable cargo at anchorage into lighters. Consignees must make arrangements with Agent to obtain permission from Customs, who will provide a Customs Officer to attend to discharge.

HEALTH: *(a)* Immigration: Immigration Officer will board vessel and clear her inward after pratique granted by Port Health Authority. Immigration will require 2 copies of passenger lists and 2 copies of crew list. Vessels inward are cleared up to 2000 hrs. only.

(b) Quarantine: For vessels coming from outside State of Brunei, Port Health Authority will board on arrival at wharf or anchorage. Port Health Authority requires complete copy of Entry Declaration of Health and copies of passenger and crew lists.

STEVEDORES: Stevedoring is in the hands of contractors who supply gangs as required. Working hours are 0730 hrs. to 1215 hrs., 1315 hrs. to 1600 hrs., 1900 to 2300 hrs. (overtime). Overtime is usually worked from 1900 to 2300 hrs., permission to work overtime is required from the Customs Department. No tally clerks available. All tallies to be made by ship's own tally clerks.

MEDICAL: Government General Hospital is situated in Bandar Seri Begawan 16 miles from Muara Harbour. General Hospital is well equipped with facilities to carry out normal surgery. Inoculations and vaccinations given free of charge.

FRESH WATER: Can be supplied from the wharf at Muara Harbour and Bandar Seri Begawan. No fresh water is supplied at Tanjong Salirong. No water-boat in State.

FIRE PRECAUTIONS: Fire-floats are stationed at Fire Brigade sub-station near Customs sub-station in Bandar Seri Begawan. No fire-floats at Muara Harbour.

CONSULS: British High Commission: Jalan Residency, tel. 2231.

HOLIDAYS: The Brunei Government working days are Monday to Thursday and Saturday. Friday and Sunday being holidays. Application must be made to Customs for working on Friday and Sunday and other public holidays. Brunei being a Muslim State, insists on strict observation of all Muslim rites such as The Sultan's Birthday, Har Raya Puasa, Hari Raya Haji, etc. Chinese New Year is also observed.

POLICE/AMBULANCE/FIRE: General Hospital, Jalan Stoney, Bandar Seri Begawan, office tel. 3521; residence tel. 2422. Police HQ, Jalan Gadong, Bandar Seri Begawan, office tel. 3901; residence tel. 3901 Ex. 245. Fire Brigade, Muara, tel. 8755, Bandar Seri Begawan, tel. 2555; residence tel. 2772.

AUTHORITY: The Director of Marine. Bandar Seri Begawan.

AGENT: Harrisons & Crosfield (Brunei) Pte. Ltd., P.O. Box 2255, Bandar Seri Begawan, State of Brunei. Telegraphic Address: "Crosfield" Telex No. BU 214. Telephone: 22361, 26203.

NOTES

Please also advise Shipping Guides Ltd.

Bulgaria

BOURGAS (including Drujba): 42.30 N. 27.29 E.

Well protected port at inner end of Bourgas Bay, with good roads, anchorage.

DOCUMENTS:
Master's Declaration.
Cargo Plan.
Custom's Manifest.
Charter Party.
Deratization Certificate.
Health Condition Certificate for Crew Members.
Manifest and Consignment of Cargo.
Provision List.
Crew Lists.
Passenger List.
Crew Passports.

PILOTAGE: Pilotage in Inner Roads compulsory for vessels above 100 g.r.t. Application for Inner Roads Pilot must be made to Agents "Inflot" at least 2 hours prior to arrival (if incorrect ETA given – pilotage fee is doubled).

Outer Roads pilotage not compulsory. Vessels requiring Outer Roads pilotage must advise Agents "Inflot" at least 12 hours before time required and give position of required pick-up point.

Applications for Pilot should include Nationality and call letters; gross tonnage; date (2 figures); Time (4 figures) when Pilot required; Draft in metres (4 figures).

APPROACHES: Through fairway, depth of channel 29 ft. LW.

ANCHORAGE: Outer Roads. Vessels anchored must keep close watch on Roads Signal Station for orders given by flag or signal lamp. Vessel ordered by authorities to proceed to position 43° 39′ N., 27° 56′ E., for clearance and Pilot.

RESTRICTIONS: Arrival and sailing from oil port Drujba, Western Port and Fish Port day and night.

RADIO: Bourgas-500 kHz. Port control VHF Channels 16 and 10. Pilots VHF Channel 14.

TUGS: Available and compulsory for vessels over 1,000 g.r.t. Tugs lines used.

BERTHING: Compulsory piloting for vessels over 50 g.r.t. Container handling facilities available. 2 berths available for bulk carriers, 10 berths for general cargo ships and 1 berth for passenger ships.

CRANES: Berths are equipped with electrical portal cranes with capacity from 3 to 32 tons. 100 ton capacity floating crane available.

STEVEDORES: Available. Liner ships and chartered vessels on liner terms are obliged to use stevedore and tallyman service.

MEDICAL: All facilities available.

TANKERS: Oil port Drujba. Height of quay 2 m.

Berthing: At the S.W. corner of the Bay there are 2 "T" shaped berths, max. depth 40 ft. There are mooring dolphins for vessels length 250 m.

Discharging: 2 × 8-in. hoses are connected to the pipe-line on the catwalk. Discharge rate 1,800 to 2,000 t.p.h. depending on the back pressure. The height limit of the hoses is about 54 ft. above sea level. The berth is protected from the prevailing N.E. wind.

Report received February 1977 states that the max. draft is 39 ft. – no length limitation. Max. draft at the Product berth (Gas Oil) is 23 ft.

DENSITY: 1012–1014.

FRESH WATER: Available through hose hydrants or ex-barge. 24 hours notice required.

FUEL: From VTO "Transimpex" tel. 45751. 72 hours notice required, diesel and gas oil available, also Shell and Castrol lubricants.

FIRE PRECAUTIONS: Constant day and night duty, and direct telephone connection with port fire service.

GANGWAY/DECK WATCHMEN: Vessels in Roads not permitted to have gangways down. Vessels alongside quay with lowered gangway must have manropes, safety net, life-buoys with rope of at least 30 m. length attached, an officer on duty at the gangway and must be lit at night.

OPENING/CLOSING HATCHES: According charter party.

CERTIFICATES:
Construction
Safety Radio
Classification
Hull and Machinery
Load-line
Cargo gear

CUSTOMS ALLOWANCE: Tobacco – 2 packets per crew member per day. Wines/spirits – for Master, as required, for crew – 1 opened bottle. No limits on board, no seals, crew are allowed to take 1 or 2 packets of cigarettes ashore.

IDENTIFICATION CARDS: Required. Crew members are given shore passes.

CONSULS: Turkey.

REPAIRS: Small repairs only.

REPATRIATION: Can be fulfilled if necessary. Replacement of crew by Bulgarian nationals is not possible.

SERVICES: Tank cleaning and removal of sludge.

TELEPHONES: Captain of the Port 42293; Pilots 47128; Customs House 42301; Bulgarian Shipping Register 47132; Shipping Agency "Inflot" 45506.

SHORE LEAVE: Allowed.

REGULATIONS: Given to Master on arrival.

DELAYS: Possible while waiting for Pilot owing to bad weather or waiting turn for berth.

TIME: GMT plus 2 hours.

HOLIDAYS: New Year (1st January); May Day (1st/2nd May); Day of Slavonic written language (24th May); Day of Freedom (9th/10th September); October Revolution (7th November). Time from 1300 hrs. on day before Sundays and Holidays until 0800 hrs. day after is non-working time, but loading and discharging carried out at overtime rates.

AIRPORT: Internal and International flights.

SHIPMASTER'S REPORT (Vessel 107,023 d.w.t.).

Danger Area: Minefield area 43, see Nemedri.

Documents:
Bill of Health.
6 Crew Lists.
3 Stores Lists.
3 Personal effects Lists.
Ship's documents (Register, Certificates, etc.).
No money list required.

Upon arrival Master receives Port Regulations (re: watchmen, ratguards, stoppage of propeller, waste disposal, pollution, etc.).

Radio: Bourgas Radio, port control VHF Channels 16 and 10; Pilots VHF Channel 14.

Density: Average 1012.

Identification Cards: Crew members are given shore passes and are allowed ashore until midnight. Persons with long hair are refused passes.

Custom Allowances: No limits on board, no seals, crew are allowed to take 1 or 2 packets of cigarettes ashore.

Repatriation: No difficulties.

Airport: Daily flights to Sofia with connecting international flights.

Tugs: Four available.

Anchorage: Vessel ordered by authorities to proceed to position 43.39 N. 27.56 E. for clearance and Pilot. After clearance vessel proceeded to 42.40 N. 27.49 E. for lightening.

Lightening: Vessel required to be lightened to 39 ft. Tankers come alongside; they carry good rubber fenders and one 10-in. discharge hose. Discharge rate varies from 1,500–1,800 t.p.h. according to tanker's requirements.

Berthing: At the SW corner of the bay. There are two "T" shaped berths, max. depth 40 ft. Each berth consists of 3 platforms connected by a catwalk. Length of berth used was 125 m.There are mooring dolphins but the length of vessel is 259 m. so all lines were breast ropes and springs.

Discharging: Two 8-in. hoses are connected to the pipe-line on the catwalk. Discharge rate, 1,800 to 2,000 t.p.h. depending on the back pressure. The height limit of the hoses is about 54 ft. above sea-level. Vessels are required to ballast if necessary before reaching this level. The Berth is protected from the prevailing N.E. wind.

Dardanelles Entrance: (Canakkale, Turkey) Pilot station is at Seddulbahir. Call sign "Canakkale Pilot" VHF Channel 16. During Southerly gales Pilot boards close to Kanakkale Town.

Bosporus: North entrance, pilot station at Kavagi, Pilot boards off Dikilikaya Light. Call Pilot on VHF Channel 16.

AUTHORITY: Region Port Administration, Bourgas.

AGENT: State Shipping Agency "Inflot". Cables: "Bolinflot", Telex: 083 509, Tel. 45506, 42879.

PORTS IN THE AREA OF PORT BOURGAS

Port Nessebar: Situated on 18 miles North-eastern of Bourgas in the Bourgas Bay. Available 2 berths for passenger and other small ships with draft up to 19 ft.

VARNA 43.12 N. 27.57 E.

Well protected port at inner end of Varna Bay.

DOCUMENTS:
Master's Declaration.
Cargo Plan.
Customs Manifest.
Charter Party.
Deratisation Certificate.
Health Condition Certificate for Crew Members.
Manifest and Consignment of Cargo.
Provision List.
Crew List.
Passenger List.
Crew Passports.

PILOTAGE: Pilotage in Inner Roads compulsory, but not compulsory for Outer Roads. Vessels requiring pilotage at Outer Roads must radio Agents "Inflot" 24 and 12 hours prior to arrival giving position of required pick-up point, also: name of vessel; nationality and call letters; g.r.t.; length; draft in metres (4 figures); date (2 figures); time (4 figures).

Pilot comes from Inner Port of Varna. In bad weather impossible for pilot boat to reach Outer Roads and vessel will be so informed by Agents "Inflot" and instructed to proceed to anchorage in Varna Bay.

Pilot boat is a patrol boat with yellow funnel and letter "P" on a blue strip. Carries international recognition signals by day and night.

APPROACHES: Through fairway, depth of channel 39 ft.

ANCHORAGES: Outer Roads in area East of meridian 27° 56′ E., beyond fairways. Vessels anchored must keep close watch on Roads Signal Station for orders given by flag or signal lamp.

RADIO: Radio Varna LZW-500 kHz. LZW-4–transmits 8607 kHz, receives 8447 kHz. LZW-5 – Transmits 13,078 kHz, receives 12,612 kHz. Port control VHF Channels 16 and 10; Pilots VHF Channel 14.
TUGS: Available and compulsory for vessels over 1,000 g.r.t. Ship's lines used.
BERTHING: Compulsory piloting for vessels over 50 g.r.t. Depths at quays up to 31 ft. 10 berths available for general cargo vessels, 1 berth for containers and 3 berths for passenger ships.
CRANES: Berths are equipped with electrical portal cranes with capacity from 3 to 32 tons, also 100 ton floating cranes are available.
Container Terminal: Loading and discharging of 10 ft., 20 ft., and 40 ft. containers. The necessary specialized loading and discharging equipment is available.
BRIDGES: When proceeding to and from Varna Lake, vessels pass under the new Asparuhov Bridge (45 m. above the water level).
STEVEDORES: Available. Liner ships and chartered vessels on liner terms are obliged to use stevedore and tallyman service.
MEDICAL: All facilities available.
TANKERS: 3 berths, draft 30, 28 and 18 ft.
DENSITY: 1013.
FRESH WATER: Available through shore hydrants or ex-barge. 24 hours notice required.
FUEL: From VTO "Transimpex", tel. 22927, No. 3 N. Vaptzarov str. 72 hours notice required. Bunker "C", diesel and gas oil available. Lubricants: Shell and Castrol – 48 hours notice required.
FIRE PRECAUTIONS: Constant day and night duty and direct telephone connection with port fire service.
GANGWAY/DECK WATCHMEN: Vessels in roads not permitted to have gangway down. Vessels alongside quay with lowered gangway must have manropes, safety-net, life-buoys with rope of at least 30 m. length attached, an officer duty at the gangway and must be lit at night.
OPENING/CLOSING HATCHES: In accordance with charter party.
CERTIFICATES:

Construction.
Safety Radio.
Classification.
Hull and Machinery.
Load-line.
Cargo Gear.

CUSTOMS ALLOWANCE: Tobacco: 2 packets per crew member per day. Wines/spirits: For Master, as required, for crew – 1 opened bottle. No limits on board, no seals, crew are allowed to take 1 or 2 packets of cigarettes ashore.
IDENTIFICATION CARDS: Required. Crew members are given shore passes.
CONSULS: U.S.S.R., D.D.R. Poland, Czechoslovakia, Cuba.
REPAIRS: All kinds of repairs possible in ship-repair yard.
DRY DOCKS: Suitable for vessels up to 30,000 d.w.t.
Floating Docks: 2 floating docks with lifting capacity of 4,500 tons and 12,500 tons respectively.
REPATRIATION: Can be fulfilled if necessary. Replacement of crew by Bulgarian nationals is not possible.
SERVICES: Tank cleaning and removal of sludge. Compass adjusting.
TELEPHONES: Captain of the Port 23479; Pilots 27023; Custom House 25532; Lloyd's representative 27167; Soviet Register 22651; Bulgarian Shipping Register 26122; State Shipping Agency "Inflot" 22669.
SHORE LEAVE: Allowed.
REGULATIONS: Given to Master on arrival.
DELAYS: Possible while waiting for Pilot owing to bad weather or waiting turn for berth.
TIME: GMT plus 2 hours.
HOLIDAYS: New Year (1st January), May Day (1st/2nd May), Day of Slavonic written language (24th May), Day of Freedom (9th/10th September), October Revolution (7th November). Time from 1300 hrs. on day before Sundays and holidays until 0800 hrs. day after is non-working time, but loading and discharging carried out at overtime rates.
AIRPORT: Internal and International Flights.
AUTHORITY: Port Administration.

AGENT: State Shipping Agency "Inflot". Cables: "Bolinflot", telex: 021516, tel. 22669, 22636, 25924.

NEW PORTS IN THE AREA OF PORT VARNA:
Port Varna-West: Situated 14 nautical miles from Port Varna. 4 berths available for bulk carriers, 2 berths for containers and 5 berths for general cargo vessels. Ships of max. 33 ft. draft proceed in one direction only, through 2 deep channels and Varna lake between them, with limitation in speed up to 6 knots. A container platform for loading and discharging of 20 ft. containers and specialized loading/discharging equipment available.
Port Balchik: Situated 18 nautical miles North of Port Varna, for ships with max. draft 23 ft. 1 berth for bulk carriers available. Entering and leaving the port with a Pilot commencing from the Outer Roads of Port Varna.
Port Topolly: Specialised port for wood materials. Situated on the Northern part of Varna lake, 8 nautical miles from Port Varna. 2 berths for ships with max. draft 15 ft. available.
Port of the Termo-electrical station Varna: Specialized port for coal, situated on the West part of Varna lake, 8.5 nautical miles from Port Varna. 2 berths for ships with max. draft 26 ft. available.

NOTES

Please also advise Shipping Guides Ltd.

Burma

RANGOON: 16.47 N. 96.15 E.

DOCUMENTS:
Ship's Register.
Crew and Passenger List.
Dangerous Cargo List, if any.
Customs Declaration for Crew and Ship.

PILOTAGE: Compulsory. The services of Assistant Harbour Masters are required to bring ships alongside.

Vessels bound for the port of Rangoon should make for the *Dagon* lightvessel (China Bakir) Lat. 15° 59.9′ N., Long. 96° 14.5′ E. and then proceed towards *Lanthaya* lightvessel. Vessels of 26 ft. draft and over should anchor off *Dagon* lightvessel due to insufficiency of depths at the pilot station at low water, and await instructions from the pilot vessel for embarking Pilot.

Vessels below 26 ft. draft may proceed direct to the pilot vessel for embarkation of Pilot.

The pilot vessel or its relief is normally cruising or anchored at Lat. 16° 11.0′ N., Long. 96° 19.6′ E. approximately 10 miles North of *Dagon* light vessel and 42 miles from the Port of Rangoon.

ANCHORAGES: Specific areas of the port are reserved for special anchorages as follows:

(a) *Petroleum Anchorage* at Liffey Reach just below Syriam, accommodating two vessels.
(b) *Explosives Anchorage* below Admiralty Jetty near Chokey Point.
(c) *Small Craft Anchorage* at King's Bank accommodating 20 inland vessels and schooners, etc.

ETA: Forty-eight hours advance notice of ETA required, confirmation to be made 24 hours later or one working day ahead of the ship's ETA to enable necessary arrangements to be made regarding Pilots. Information required in the advance notice are: *(a)* ETA, *(b)* Draft, *(c)* Speed, *(d)* Gross tonnage, *(e)* Length OA.

RESTRICTIONS: Generally on a flood tide between the time of low water to high water at the pilot station, depending on ship's actual draft and speed in order to obtain sufficient depths at the Outer Bar.

Navigation day and night during river passage, but entry into Inner Harbour is normally restricted to daylight hours.

The Master Attendant regularly issues Draft Forecasts to all steamer Agents advising them of the drafts to be obtained within the next 2 months.

MAX. SIZE: The port is accessible to vessel of 540 ft. length OA, and draft up to 28 ft. at Spring tides. The draft of the vessel entering the river is controlled by the depth available at the Outer Bar, carrying 11 ft. depth at datum. Entry into the harbour is controlled by the Inner Bar off Monkey Point, carrying from 11 ft. to 12 ft. depth at datum. These depths are subject to seasonal variations and are least during the dry season from November to May.

HEALTH:

(a) Maritime Declaration of Health signed by the Master and also by a Ship's Surgeon if one is available.
(b) Valid Derating or Derating Exemption Certificate.
(c) Valid Vaccination Certificates against cholera and smallpox of crew and passengers (if a certified list of date of expiry of these Certificates is available, the issue of pratique will be expedited).
(d) Pratique is issued by the Medical Officer on duty, after examination of the crew and passengers of the ship. The pratique is automatic if the vessel arrives after touching other ports in the country. NO RADIO PRATIQUE IS ISSUED.
(e) Quarantine Clearance on sailing is essential.

RADIO: International single operator watch period for zone "C". Assigned frequencies are 425, 454, 468, 512, 500 kc/s. and 2.8, 4.26 mc/s, call sign XYCZ.

In cases of inability to contact the pilot vessel by wireless the Master should send cable to the Harbour Master "Portrust" via Rangoon Radio Station, call sign XYR.

Within harbour limits contact can be made with Port Tower by light visual signalling. VHF contact can also be made with Port Tower, call sign XYU, Channel 16 (calling frequency). The working frequencies are Channels 14, 12 and 6 (Hague Convention).

TUGS: Generally not used for mooring and berthing purposes, but available in emergency.

BERTHING: There are eleven wharf berths and two pontoon berths for seagoing vessels:

Rice Loading Berths:

(a) *Sule Pagoda Wharf*, Berths No. 1 & 2 accommodating two vessels of 450 ft. each. LWOST varies from 24 ft. to 28 ft. approx.
(b) *Ahlone Wharf*, length 440 ft. accommodating a vessel of 440 ft. LWOST varies from 26 ft. to 28 ft. approx.
(c) *Hteedan No. 1*, length 456 ft. accommodating a vessel of 460 ft. LWOST varies from 26 ft. to 30 ft. approx.

General Cargo Berths:

Sule Pagoda Wharf Berths Nos. 3, 4, 5, 6 and 7 accommodating five vessels ranging from 450 ft. to 520 ft. LWOST varies from 24 ft. to 30 ft. approx. Berth Nos. 3 and 4 are generally reserved for coastal vessels.

Timber Export Berths:

Brooking Street Wharf: Berths Nos. 1 and 2, accommodating two vessels of 450 ft. each. LWOST varies from 26 ft. to 29 ft. approx.

Passenger Berth:

The Port Health Station. A Pontoon Jetty equipped with a large floating pontoon 500 ft. length and accommodating vessels of 520 ft. to 595 ft. LWOST varies from 25 ft. to 28 ft.

Moorings:

The port is equipped with 13 swinging moorings and two sets of fixed moorings in the Inner Harbour; three swinging mooring buoys at Hastings, and two fixed moorings for Oil Tankers. In addition, a number of mooring buoys are provided for small sized seagoing vessels.

Mooring and Berthing Procedure:

While in port, ships tie alongside wharves or moorings. The procedure is as follows:

(a) *Single Buoy Mooring* – Vessels moored with ships' own cable which is led through hawse pipe and shackled on to buoy cable. The shackle is provided by the Board.

(b) *Fixed Mooring* – Same procedure as above but the vessel is moored to four buoys.

(c) *Berthing* – Normal ship's ropes and wires are used for berthing at wharves. In addition wharves' mooring chains are also provided for securing to ship's bollards.

FUEL: Fuel, diesel and gas oil (HSD) from Myanma Oil Corporation. Fuel oil provided by barges of 150 to 180 tons capacity alongside vessel during daylight hours. Coal supplied by Government Trade Corporation No. 17.

FRESH WATER: Available either directly alongside the wharves or in midstream, delivered by water boats.

CARGO HANDLING EQUIPMENT: The heaviest lifting capacity of the port is a 40-ton crane at the Brooking Street Wharf.

Heavy packages may be landed or shipped by a vessel's own tackle at the wharves subject to prior notice being given to the Traffic Manager.

STEVEDORES: In two shifts of 0800 hrs. to 1600 hrs., and 2000 hrs. to 0400 hrs. Overtime work is arranged on special request from Agents. Stevedoring undertaken by Port Authority. To enable ship's Agents to order labour gangs in time, it is important to obtain in advance the accurate ETA of vessels. Latest time to order gangs is 1100 hrs. for booking for that night and the next day. For Sundays and Holidays bookings must be made before 1100 hrs. of the preceding working day.

GANGWAY/DECK WATCHMEN: Available on application to the Traffic Manager.

The working hours of a watchman are the same as the wharf working hours.

OPENING/CLOSING HATCHES: Undertaken by port labour.

REPAIRS: Deep-sea repairs are undertaken by Board's engineers. The "Setsan Dry Dock", a tidal dock owned by the Board, can take vessels up to 1,000 tons and 250 ft. in length.

The Sinmalaik Dry Dock can take vessels up to 2,000 tons and 300 ft. in length.

FIRE PRECAUTIONS: A special land-based Port Fire Brigade is maintained by the Port Authority supplemented by a fire-fighting vessel and tugs for emergencies in the river.

CONSULS: The following countries are represented by consulates or embassies at Rangoon:

Australia
Belgium
Bulgaria
Cambodia
Ceylon
China
Czechoslovakia
Egypt
France
Fed. Republic of Germany
German Democr. Republic
Hungary
India
Indonesia
Israel
Japan
People's Rep. of Korea
Republic of Korea
Malaysia
Nepal
Norway
Pakistan
Philippines
Poland
Thailand
U.S.S.R.
Great Britain
Vietnam
Yugoslavia

POLICE/AMBULANCE/FIRE: Port Police 14520; Ambulance 008; Port Fire Brigade 18653.

TELEPHONES: Ship to shore telephones are available on request.

HOLIDAYS: Independence Day; Karen New Year; Union Day; Peasant's Day; Full moon of Tabaung; Resistance Day; Thingyan; Burmese New Year; Labour Day; Full moon of Kason; Full moon of Wazo; Martyr's Day; Thadingyut; Dewali; Tazaungdaing; National Day; Christmas.

Ships may work on Sundays and holidays on application to the Traffic Manager and on payment of Sunday or holiday fees.

SHIPMASTER'S REPORT: July 1978

Approaches: Approach was from the Malacca Strait, in generally overcast and rainy weather. The last reliable fix obtained prior to picking up the Dagon Lt. Ship at 1330 hrs. on 6/7/78 was at 0530 hrs. on 5/7/78. From 1330 hrs. on 5th, 2° were allowed for Easterly set, apart from a 2-hour period on the 6th, when only the Compass Error was allowed. This would seem to indicate that an Easterly set was experienced, but it is possible that what actually occurred was that the vessel was set to the Eastward by the tide, from about 0900 hrs. on the 6th until the Dagon Light Ship was picked up. We sighted the Dagon at about the time and on about the bearing we expected.

The tidal information provided on B.A. Chart 823, although depending on observations obtained during the dry season, was most helpful.

On clearing the Rangoon River, shortly after HW Elephant Point, there was a slight South-Westerly tidal set, as one would expect. The departure Pilot provided the following information, which we were not able to check:

B.A. Chart 823: "Thuriya" Lt. Buoy is in position Lat. 15° 19′ N., Long. 95° 01′ E., and not as charted.

The two dangerous wrecks about 38 and 40 miles South of Thante Light are no longer dangerous.

B.A. Chart 833: The dangerous wreck between Upper Western and Upper Middle Buoys is no longer dangerous. We passed between the buoys without any difficulty, drawing 19 ft. 03 in., fresh water. The following is from our own observations: Upper Spit Buoy is now in approximate position 290°(T)–7 cables from its charted position. All buoys, from and including Upper Spit Buoy to the berth, with the sole exception of "C.M.B." Buoy, were unlit.

Naturally, vessels do not transit this portion of the river during the hours of darkness. With the exception of Upper Spit Buoy all buoys, light floats and the light ship appeared to be in their charted positions. When crossing the bars and during the river passage very close attention must be paid to the steering. With a top-class helmsman who is really concentrating, little difficulty would be experienced. In order to carry the tide up to Rangoon, it is important that a vessel should arrive at the Pilot station not later than HW Elephant Point; we were in fact 10 minutes late, and would not have continued except that we were fortunate enough to have the most senior Pilot on board.

It was noticed on departure that an inbound vessel giving an ETA at the Pilot station 30 minutes after HW Elephant Point, was directed to anchor.

Anchorages: Vessels may anchor in the vicinity of the Pilot station shown on B.A. Chart 823 or in the petroleum or explosives anchorages shown on B.A. Chart 833.

Berthing: Vessel was originally placed at a buoy berth, the anchor cable down the hawsepipe and shackled on to the buoy. The Port Authority provided the shackle.

As we have a short length of cable inboard of each anchor with a joining shackle, this operation presented little difficulty but took considerable time.

When we were placed at the buoy, it was dark by the time the operation was completed, but if we had gone straight alongside this could have been done under twilight conditions. Neither the Pilot nor I could understand why the vessel was not berthed on arrival, since our berth was then vacant. The explanation I received was that the shore lighting was poor and that, as a safety precaution, ships are only berthed in full daylight.

At 0625 hrs. the next morning, we commenced unshackling from the buoy and the vessel was secured alongside No. 1 berth. Sule Pagoda Wharf at 0805 hrs. We berthed starboard side to, stemming the ebb tide and river outflow. The buoy anchor remained hung off until after berthing. When berthing, the offshore anchor is placed in a convenient position to assist in getting the vessel off again. When alongside and the cable slack, we had 4.5 shackles out on the port anchor. Moorings were as follows: Forward – three headlines, one ship's wire and a shore mooring chain, all leading ahead. No spring. The shore chain is brought on board and turned up on the ship's bitts. Aft – one breastrope, two sternlines and ship's wire leading aft. No spring.

Departure: The vessel leaves the berth on the last of the ebb and drops down the harbour stern first to a position North of the transit beacons on the South bank, where she anchors until there is sufficient water to cross the inner bar and proceed downstream.

Pilotage: Is compulsory. River Pilots take the vessel from the Pilot station to the port or buoy and docking Pilots do the berthing and unberthing, including dropping down to the temporary anchorage. The docking Pilot remains on board while at anchor. River Pilots, when boarding and leaving, require Pilot ladder, manropes and a boatrope. Ship comes under the stern, never ahead, of the cutter, with ladder rigged on the lee side. Docking Pilots board and leave by the gangway.

Tugs: There are tugs in the port, but I understand that they are never used for berthing.

Communications: Rangoon Radio, call sign XYR, keeps regular watch schedules on six HF frequencies. However from departure Lae on 24th June to 2nd July, nothing was heard of this station.

Two-way contact was established on 3rd July, but after the station had instructed the Radio Officer to change frequency, it ceased working.

It was not until 0500 Z on 4th July that traffic could be cleared. Later that day it became possible to work XYR on MF. All calls were then answered promptly and an efficient service provided.

An advice of bad propogation conditions from Portishead Radio was in effect during the period covered by the above remarks. This may have had some bearing on the difficulties experienced. The vessel arrived at the Pilot Station at 0830 Z, 6th July, 1978.

VHF: The Pilot cutter and the Harbour Master's office are fitted with VHF Channel 16. This is efficiently operated.

Telephone: I spent many hours in the Agent's office, attempting to contact London. We were unsuccessful. The hours, local time, during which one may attempt to call London, are: via Hong Kong – 0900 to 1430 hrs.; via India – 1630 to 1800 hrs. These hours are nominated by the port and Telecommunication corporation.

Telex: There is a Telex machine in the Agent's office, and the Operator's normal hours of duty are 0930 to 1630 hrs. It was possible to send an outward message only in these hours and so, on occasions, it was necessary to request that the Operator remain on duty until 2000 hrs. The reasons for the difficulty in sending outward messages is: Unless a special request is made otherwise, all outward messages are sent to a central transmitting point. Inward messages were received promptly.

Mail: Both to and from Europe and Australiasia, appeared to be reliable.

Agents: T.A.C. are a government corporation and handle every vessel that uses the port. All concerned are most charming, and very polite. All persons I came into contact with from T.A.C. spoke excellent English.

Documents: Required on arrival: 20 Crew Lists, 6 Crew Personal Effects Lists, 6 Ship's Declarations of Foreign Currency, 6 Crew Declarations of Foreign Currency, 1 International Health Declaration, 1 List of dates of Smallpox and Cholera Vaccinations.

Notes:

1. All on board must be possession of valid vaccination certificates against smallpox and cholera.
2. The Customs do an efficient rummage on arrival, and again on sailing. Their main concerns seem to be cigarettes, foreign currency and pornography.
3. It is most important that all paper money of any foreign country held either by the ship or by individuals is accurately declared and then placed in one or other of the ship's safes. The safes are then sealed and can only be opened with the approval of the resident Customs Officer. Time and trouble on arrival can be saved by collecting all foreign currency in advance. Some small amounts of foreign currency were found by rummagers, but a lenient attitude was taken and these sums were allowed to be placed under seal. The Penalties for attempting to evade the regulations with regard to foreign currency are severe.
4. All on board are required to be photographed, so that local shore passes may be issued. The passes are valid for 12 months from date of issue and cover subsequent calls at Rangoon or any other Burmese port. No shore leave is permitted until shore passes in quadruplicate have been processed. This happens quite swiftly and takes about 12 hours.
5. With the exception of the Health Declaration, there do not appear to be any pre-printed Burmese Forms, and the ship will have to make up her own.

Departure: At least 6 up-to-date Crew Lists are required. All shore passes must be collected prior to departure, they are stamped by Immigration and returned to the holders.

All 3 government departments involved with the vessel (Customs, Immigration and Quarantine) issue a clearance on departure. In addition, the Master is given a letter from the Burma Ports Corporation for the River Pilot, stating that all sailing documents have been produced and giving permission for the vessel to proceed to sea.

Register and supporting Certificates: (Load Line, Safety Equipment, etc) are taken ashore by Agents on arrival, against a receipt, and returned immediately prior to departure.

Officials: Supervisors and Tally Clerks wear uniform with badges of rank. They must be provided with an office on board, and it is customary to provide these gentlemen with meals. Two Customs Officers live on board at all times and accompany vessel to anchorage or buoy berth. These Officers must be fed in the dining saloon and provided with accommodation. On arrival the Customs seal the bond and, if requested to do so, will also seal the dry stores, which is a wise precaution.

Beer is not put under seal. The Customs Officer will make an issue of bonded items daily if requested. The only thing to which restrictions are applied is cigarettes, where the daily issue is limited to 40 per man. Customs also exercise a tight control over all local currency drawn from the Agents and all must be accounted for prior to departure, even cash spent on Provisions.

Cargo work: Two shifts of 8 hours are normally worked, that is, 0800 to 1600 and 2000 to 0400 hrs. Cargo can be worked at any time. Overtime hours being 1600 to 2000 and 0400 to 0800 hrs. Ship's gear was used for discharge. Two gangs were employed at each hatch, and rates of discharge were: No. 2 – 10.35 t.p.h. No. 3 – 14.46 t.p.h. The rate of discharge at No. 2 was remarkably good when one takes into consideration that No. 2 after crane, due to a winch breakdown, was not available after the first 1.5 days. Two gangs were employed throughout at this hatch. After the crane failure the after gang were employed in shifting cargo to where the forward crane could plumb it.

Weather permitting, discharge continued 24 hours a day. A total of 37 hours, 40 minutes working time was lost due to rain. When one takes into consideration the many delays and the fact that the Watersiders were discharging a random stow, the rate of discharge was most creditable. Crane drivers and Watersiders were very satisfactory; Supervisors were helpful. Pilferage was nil, damage to cargo was slight and there was no damage to the ship.

Pratique: Granted on arrival. There are no facilities for Radio Pratique.

Provisions: Obtained through the Shipchandler. But very expensive. We purchased salad and bread at the local market at reasonable prices and of reasonable quality. This was done by the Purser/Catering Officer, going there with the Agent and paying cash. This is common practice and was condoned by our Customs Officer.

As we had no contact with the Official Shipchandler, we do not know what his prices were or what his product range is. Any future vessel calling at Rangoon should arrive with as much in the storerooms as possible.

Fresh Water: Obtainable either from water boats or the wharf. Give 2 days notice. It is expensive, 10 Kyats (about 79 pence) a ton. As a precaution, we treated what we took with chloride of lime.

Repairs: We employed some electricians from the machine shop of the Central Electric Service to assist in our investigations of the winch fault at No. 2 hatch. An Electrical Engineer and 3 Electricians were provided and appeared competent. Unfortunately, they did not trace the fault.

Currency: The Unit of Currency is the Kyat, worth approximately 12.69 to the Pound Sterling.

Weather: Hot and humid, with much rain, it being the season of the S.W. monsoon. Winds in the port were generally light. At the time of our stay, the river was just beginning to rise as a result of the monsoonal rains in the high country, but had not reached full flood. There was, however, a continuous outflow past the port at all states of the tide.

Health: Up to date cholera vaccination certificates are required by the local authorities and anti-malaria precautions should be taken. Mosquitoes and many other insects are numerous, especially in the wet weather.

General: Five watchmen were provided. When at anchor or at buoy berth, the ship must feed them. When alongside, they eat ashore. The security at the gate is very strict indeed and all local people leaving the port area are searched. No ship's gear or personal effects went missing. There is no garbage collection at Rangoon, so the ship must make her own arrangements for storing waste. Burmese people are unfailingly polite and courteous and naturally expect the same treatment in return. The vessel can work cargo on any day.

Repatriation: Possible but not recommended.

Holidays: (1978). January 4th (Independence Day); January 9th (Karen New Year); February 12th (Union Day); March 2nd (Farmer's Day); March 23rd (Full Moon Day); March 27th Resistance Day (Armed Forces Day); April 13th – 16th Water Festival (Burmese New year); May 1st (May Day); June 20th (Full Moon); July 19th (Martyrs Day); August 18th (Full Moon); October 15th – 17th (Lighting Festival (Buddhist); November 13th – 15th Lighting Festival (Buddhist); November 24th (National Day); December 25th Christmas (There are a large number of Christians in Burma).

AUTHORITY: Board of Management for the Port of Rangoon.

NOTES

Please also advise Shipping Guides Ltd.

Cambodia (Khmer Republic)

KOMPONGSOM 10.38 N. 103.29 E.

PORT LIMITS: The seaward boundaries are fixed by the buoys "KS" to the South and "A" to the East (for cargo ships) and 2 miles N.W. of Rocher Carre (for tankers).

DOCUMENTS:

Entry form to be completed on arrival.
23 Manifests of Cargo for Discharge.
2 Manifests of Cargo in Transit.
10 Crew Lists.
7 Passenger Lists.
7 Lists of Provisions.
7 Lists of Crew Personal Effects.
7 Lists of Arms and Ammunition.
7 Lists of Drugs and Narcotics.
Ship's Register.
Passenger Safety Certificate.
Safety Equipment Certificate.
Safety Radio Certificate.
Safety Construction Certificate.
Load Line Certificate.
Derat Exemption Certificate.

PILOTAGE: Contact "Pilot Kompongsom" giving ETA 24 hours before arrival. Pilotage is compulsory for all vessels of more than 150 nrt. Pilot launch is a white motor boat carrying international pilot signals. Cargo Vessels: Pilot boards at buoy KS. Tankers: Pilot boards 2 miles N.W. of Rocher Carre. Pilot station equipped with VHF simplex channel only, Channel 16.

ANCHORAGE: Southern Anchorage: Centred on buoy KS at the entrance of the deep-water channel in depths of 10 to 12 m.

Northern Anchorage: to the West of buoy A, in depths of 10 to 11 m.

Tanker Anchorage: two miles N.W. of Rocher Carre in depths of 15 to 18 m.

RESTRICTIONS: Entrance prohibited to Portuguese and South African vessels. Berthing daylight only, and unberthing day and night but delays may occur in bad weather during S.W. monsoon.

MAX. SIZE: Cargo vessels: draft 7.60 m. plus height of tide. Limited by entrance channel. Tankers: length 220 m., and draft 11.50 m.

HEALTH: Authorities board all vessels on arrival at the quay or in the outer harbour. Quarantine flag to be flown by all vessels even if coming from a Cambodian port. In case of suspected disease on board, contact "Sante Kompongsom" by radio before arrival.

RADIO: Kompongsom Radio; call sign XUK, operating 24 hours daily, medium wave: receiving on 500 kHz, transmitting on 500 and 458 kHz. short wave: receiving on 8364 and 4185 kHz. transmitting on 8480, 8680, and 4342 kHz.

TUGS: Available to assist berthing and unberthing. Join vessel in immediate vicinity of the berth. Vessel's lines used. Three tugs available, largest 1,500 h.p.

BERTHING: Commercial Dock: West side, 2 berths for vessels up to 9.50 m. draft. East side, 2 berths for vessels up to 7.50 m. draft.

New basin, for vessels up to 6.50 m. draft.

Tankers: Oil Refinery Terminal situated at Pointe du Depart. Two sea-line buoy berths in depths of 13 m. No slop disposal facilities. Hoses are lifted and connected by ship's crew.

STEVEDORES: Working times from 0700–1130 hrs, from 1400–1700 hrs., from 1900–2200 hrs. according to authorisation of Military.

MEDICAL: Advance notice required of serious cases to arrange transportation to Phnom Penh. Local doctors and hospital available for non-surgical cases. Crew require cholera and yellow fever certificates.

DENSITY: 1022 in February; 1012 in July.

FRESH WATER: Available at Commercial Dock at rate of 10 cu.m. per hour. Very small quantities may be supplied by tug.

FUEL: Only available supply by tanker-lorries in case of emergency.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

DEVELOPMENTS: New wharves being built and access channels deepened.

OPENING/CLOSING HATCHES: Performed by stevedores.

CUSTOMS ALLOWANCES: Each crew member allowed one carton cigarettes and one bottle alcohol for five days. Master not included in this restriction.

IDENTIFICATION CARDS: Seamans passports or seamans books are taken by immigration in exchange for a shore pass to be surrendered when vessel departs.

CONSULS: France, tel. 2742. All other consuls at Phnom Penh.

REPAIRS: Small repairs can be undertaken on board.

REPATRIATION: Can be arranged.

AIRPORT: Ream Airport, 18 km. from Kompongsom, domestic flights only. Pochentong Airport at Phnom Penh 226 km. from Kompongsom, with full international services.

TIME: GMT plus 7 hours all the year round.

HOLIDAYS: Work can usually be arranged on all days except at Cambodian New Year, 13th, 14th and 15th April, and for two days near the end of September which is the Buddhist Festival of the Dead.

POLICE/AMBULANCE/FIRE: National Police tel. 2630; Police Aid 17; Fire 18; Ambulance 19.

SHORE LEAVE: Allowed. Permission of Immigration Dept. is required to travel outside of Kompongsom port area.

Curfew: In force from 2200–0600 hrs.

AUTHORITY: Direction du Port Autonome de Kompongsom.

NOTES

Please also advise Shipping Guides Ltd.

Cameroon, United Republic of

DOUALA: 04.00 N. 09.40 E. **(See Plan Book)**
TIKO: 04.00 N. 09.24 E.
VICTORIA: 04.01 N. 09.13 E.
KRIBI: 02.56 N. 09.54 E.

DOCUMENTS:
5 Crew Lists.
5 Lists of Port of Call.
5 Passengers' Lists.
2 Crew Customs Declarations.
2 Declaration of Provisions on Board.
1 Arms and Ammunition.
2 Stores Lists
2 Manifests or Bills of Lading

PILOTAGE: (With the exception of Kribi and Victoria where ships work cargo at anchorage); Compulsory at Douala and Tiko. Ship's arrival must be notified at least 24 hrs. in advance. This must be confirmed.

For Douala waiting anchorage at base buoy (3° 54.1′ N. 9° 32.2′ E.). Pilot called by phone (2182) or by VHF (16–14). For entry of Tiko waiting is at Victoria anchorage.

ANCHORAGE: Base buoy for entry at Douala (see "Pilotage") 12 m. depth approx. For Victoria anchorage on roads in Bay Ambas about 9 m. depth. Anchorage for Tiko on the Bimbia. Kribi anchorage by red conical buoy (02° 56′ 35″ N. 09° 53′ E.) depth 6.30 m. to 7 m.

RESTRICTIONS: Draft only, for ports of Douala and Tiko. Official level of Wouri Channel is 4.80 m.

MAX. SIZE: At Kribi and Victoria anchorage, no restrictions. Douala max. length 200 m. Draft varies from 7.00 m. min. HW to 7.80 m. at max. HW. At Tiko there is only 1 pier of 150 m. the depth is between 5.50 m. and 5.80 m.

HEALTH: Free pratique granted after compulsory checking of vaccination certificates against yellow fever and smallpox. Health Officials hand the Master a special Health form to fill in.

RADIO: (See "Pilotage"). Douala Radio Station limited to broadcasting for private individuals. VHF Channels 16 and 14.

For vessels arriving at Douala, Masters should send a message to their Agent at least 48 hours prior to arrival, giving the following information. (1) ETA at base buoy (given in local time). (2) Cargo tonnage for discharge, and hatch distribution. (3) Number of gangs required. (4) Vessel's draft. (5) Any other requirements, e.g. money, medical attendance, etc.

For vessels arriving on a Sunday or Holiday, Agents must be informed by 1100 hrs., the day before arrival. If overtime or night work is required by vessel, the Agent must be informed by 1700 hrs. the day before arrival. It is also possible to telex information from the last port of call as Douala Radio Station can be difficult to contact.

TUGS: Two tugs 900 and 1500 h.p. are available on request to Cameroon National Ports Authority, Operations Department. Towage is compulsory for ships of 600 d.w.t. and more, and subject to Pilot's advice.

BERTHING: For Douala Port, there are 11 berths equal to 1,837 m. length approximately, at the left bank.

Two of these berths have priority berthing for mailboats, Aluminia carriers and occasionally tankers.

There is a berth consisting of 2 dolphins and 4 buoys used for oil discharging; Tankers moor with 3 head and stern lines to the outer mooring buoy, 2 breast lines to the inner mooring buoys and spring lines on the dolphins.

At Douala, all berths have a depth of 7.5 m. approximately at LW. The tanker berth has a depth of 9.00 m. at LW (tide range =2 m.).

At the right bank of the river: Bonaberi, there are 2 berths equal to 350 m. length, 1 is mainly used by banana carriers and butane tankers. The other is equipped with a Goliath Crane used by mineral carriers. At Bonaberi, there is also a provisional Roll-on/Roll-off terminal for ships of not more than 120 m. All these berths have a depth of 13 m. at LW.

STEVEDORES: The number of stevedore gangs is requested from Charterer's Agents, taking into account size of cargo.

MEDICAL: An appropriate Medical Service can be provided on request in case of an emergency, such as an epidemic on board.

TANKERS: At Douala harbour, a berth of 153 m. approximately can accommodate oil tankers of about 12,000 tons when the tanker berth has a breakdown. No slops discharge. The depth at LW is 7.00 m. The tanker berth in the river can accommodate tankers of not more than 200 m.

Restrictions: maximum permissible draft depends on the tide and the season (dry and rainy). At the moment, it is admitted that the maximum permissible draft is 24 ft. at LW.

At the tanker berth are found three (3) connections of 8 in. for white products, discharge rate of about 250 to 300 t.p.h. Bunkers can be supplied but are not always available.

Sailing from the tanker berth: subject draft, always on flood tide between 2 hours before HW and LW; sailing/mooring, day and night. 1 or 2 tugs (optional) assist in mooring and sailing proceedings. A permanent tug assists during discharging.

A special boat keeps contact with the shore from the dolphins (for crew and stores). No slop discharge.

DENSITY: 1012.

FRESH WATER: Available at berth; supplied by hoses at 20 t.p.h.

FUEL: Supplies arranged by Charterer's Agent who have their particular suppliers.

FIRE PRECAUTIONS: In addition to the usual measures, the quay station for oil tankers is isolated during discharging, and there is also a permanent watch by tugs.

GANGWAY/DECK WATCHMEN: Ship's crew or arranged by Charterer's Agents.

OPENING/CLOSING HATCHES: At option of Master.

CERTIFICATES: Safety, Radio, Sea-worthiness, Freeboard, Derricks, etc.

CUSTOMS ALLOWANCE: 1,000 cigarettes per person, 2 bottles of spirits per person.

IDENTITY CARDS: A check could be made inside the harbour area as well as in town.

CONSULS: At Douala.
Germany, P.O. Box 509. Tel: 42.35.00.
Canada, P.O. Box 559. Tel: 42.37.19.
China. Tel: 42.22.68.
Austria, P.O. Box 1323. Tel: 42.11.19.
Belgium, P.O. Box 263. Tel: 42.47.50.
Denmark, P.O. Box 215. Tel: 42.64.64.
Spain, P.O. Box 1102. Tel: 42.23.95.
U.S.A., P.O. Box 4006. Tel: 42.34.34.
Finland, P.O. Box 4003. Tel: 42.43.88.
France, P.O. Box 869. Tel: 42.62.50.
U.K., P.O. Box 1016. Tel: 42.21.77.
Greece, P.O. Box 4009. Tel: 42.44.53.
Italy, P.O. Box 5175. Tel: 42.64.26.
Lebanon, P.O. Box 5147. Tel: 42.62.65.
Monaco, P.O. Box 739. Tel: 42.14.44.
Nigeria, P.O. Box 1553. Tel: 42.48.81.
Norway and Sweden, P.O. Box 320. Tel: 42.53.88.
Netherlands, P.O. Box 4070. Tel: 42.32.31.
Chad, P.O. Box 47. Tel: 42.34.50.

AIRPORT: The new Douala international airport is situated about 12 km. from Douala Port. Regular international airline flights during whole year.

TIME: Local time GMT plus 1. No change during year.

HOLIDAYS: Official holidays: New Year's Day (1st January); Youth Day (11th February); Labour Day (1st May); National Day (20th May); Religious Holidays: Whit Friday, Easter Day; Ascension Day; Assumption Day; Christmas Day (25th December); End of Ramadan; Festival of the Sheep.

POLICE/AMBULANCE/FIRE: Central police station, Tel: 42.55.25. Ambulance (Hospital Laquintinie), Tel: 42.68.88; (Polyclinique), Tel: 42.18.40. Fire Brigade (in town), Tel: 18. Cameroon National Ports Authority, Tel: 42.52.33 or 42.15.22, ext. 466.

TELEPHONES: No telephone connection on board.

SERVICES: Deratisation and fumigation.

SHORE-LEAVE: Permitted.

DEVELOPMENTS: The port of Douala is the most important port of Cameroon, handling more than 90% of its maritime traffic. For this reason, and because of its socio-economic environment, a development project was launched with the laying of the foundation stone on the 18th December, 1976. it is hoped that the expected new port capacity (5 million tons), will meet the needs of the increasing traffic, thus permitting to avoid the possible port congestion. The project comprises:
The dredging of the access channel from 5 m. to 8.5 m.
The construction of a fishing port.
The construction of a 400 m. Container Terminal with an associated Roll-on/Roll-off Terminal.
The construction of a timber port.
The construction of a repairs unit.
Railway and road connections, extensions of storage areas.

DELAYS: Not usually.

AUTHORITY: Cameroon National Ports Authority.

AGENT: *Douala:* Socopao Cameroun, B.P. 215 Douala. Tel: 42.64.64. Telex: Freight 5252/5214/5319 KN. Telex: (Airport) Freight 557 Kn. *Kribi:* Socopao Cameroun, B.P. 38 Kribi. Tel: 46.10.58. *Victoria:* Socopao Cameroun, B.P. 27 Victoria. Tel: 33.52.11. Telex: Freight 5241 KN.

NOTES

Please also advise Shipping Guides Ltd.

Canada

GENERAL: *Pilotage Regulations:* Vessels arriving from any point *East* of the Strait of Belle Isle, Cabot Strait or the Strait of Canso is required to give notice of ETA 24 hours in advance, second notice of ETA 12 hours in advance and Final notice confirming or correcting the ETA 4 hours in advance. With the first notice the following information should be supplied:

(*a*) in the case of the first arrival of the ship in the compulsory pilotage area in any calendar year,
  (1) the name, nationality, call sign and Agent of the ship,
  (2) the length, breadth, moulded depth, deepest draft, speed and the largest net registered tonnage of the ship, and
  (3) the immediate and the ultimate destinations of the ship within the compulsory pilotage area, and
(*b*) in the case of any subsequent arrival, movage or departure of the ship in the compulsory pilotage area in any calendar year,
  (1) the name, call sign, deepest draft, the speed of the ship and any changes in the information provided under paragraph (*a*), and
  (2) the immediate and ultimate destinations of the ship within the compulsory pilotage area

The Laurentian Pilotage Authority advises that, where there is failure to give the required notices, without reasonable cause, the Authority is *not* required to provide the vessel with the services of a Pilot.

AMHERSTBURG, Ontario: 42.06 N. 83.08 W.

PORT LIMITS: Southerly Port Limits commence at Buoys 43D and 44D and extend on the Canadian side of the International Boundary Line, northerly to the southerly limits of Windsor Harbour.
DOCUMENTS: Amherstburg is not a port of entry, but a Customs Officer is available upon notice 24 hours a day. Foreign Ships, on arrival, are required to present Canadian Customs Form A-6 inward and A-6 outwards.
PILOTAGE: Pilotage is compulsory as required by Seaway Regulations.
ANCHORAGES: Windsor Harbour is the only recognized anchorage in Detroit River.
RESTRICTIONS: Seaway draft is maintained in main channel and shallow draft channel of 21 ft. Water levels are affected by fluctuation of Lake Erie. A Low Water Warning is broadcast from Belle Isle on 2670 kHz and 156.6 mHz on the odd hour plus 55 minutes when the water level in the West end of Lake Erie falls 1 inch or more below the lower level of the Lake Survey Centre's predicted range of levels shown in bulletins issued the 5th and 20th of each month during navigation season. An Occulting Amber Light is shown from Detroit River Light (U.S. Light List 850) during these conditions. When the water level is at, or above the lower level of the predicted range a fixed amber light is shown from Detroit River Light.
MAX. SIZE: About 432 ft. long and 21 ft. draft is maximum for Allied Chemical Dock.
HEALTH: Pratique is not necessary as vessel has passed all health requirements before entering Canada.
RADIO: Messages may be sent and received via VBE Sarnia Radio.
VHF: None available for port movement, except as established between vessels in Harbour.
TUGS: Available, but not usually used.
BERTHING: Public Wharf has a frontage of 250 ft. with large warehouse on it. (The warehouse is to be removed in the near future and not be replaced). Vessels draft for approach 17 ft. North is Department of Transport Wharf and Buoy Depot, length 291 ft., draft approach 17 ft. North of this dock is McQueen's, 17 ft. draft. The old Town Coal Dock is being converted into a public park. Allied Chemical is a private dock which consists of 3 cement filled caissons protected with steel sheet piling. Import fuel oil and export liquid calcium. Vessels of 412 ft. length call here regularly, draft approach along side 21 ft.
CRANES: Shore cranes are available for hire from private contractors, also floating barges with cranes, 100 ton capacity and 200 ft. boom if required.
BULK CARGO FACILITIES: Conditions of various wharves does not warrant any usage for bulk cargoes.
BRIDGES: No bridges within Amherstburg Harbour area.
STEVEDORES: Stevedoring is arranged through Agents in Windsor.
MEDICAL: Should medical attention be required it can be arranged through radio station VBE Sarnia by message to Canadian Coast Guard Base Amherstburg. Hospitals are available in Windsor with Ambulance service. Injured seaman can be taken off if necessary by Canadian Coast Guard in vicinity of Amherstburg, when notified via VBE Radio Sarnia.
TANKERS: Use private wharf of Allied Chemical Limited.
DENSITY: Fresh water only.
FRESH WATER: Fresh water could be supplied in an emergency by tank truck or contacting Public Utilities Commission.
FUEL: Not available on docks, except by truck.
FIRE PRECAUTIONS: Usual ship board fire precautions on board.
CONSULS: None.
REPAIRS: Small ship repairs can be carried out by local firms from Windsor.
DRY DOCK: None.
SURVEYORS: None stationed in port, but arrangements can be made to have an inspector when required.
GANGWAY/DECK WATCHMEN: No regulations requiring watchman.
CUSTOMS ALLOWANCES: Same as all Canadian Customs Regulations.
CARGO GEAR: Ship's gear, unless pallets are used.
REPATRIATION: Arrangements for crew change can be made.
AIRPORT: Windsor Airport is 20 miles distance and service is by Air Canada, Nordair and numerous charter companies.
TIME: Local time is GMT plus 5 hours and Summer time plus 4 hours.
HOLIDAYS: All Canadian Holidays, working time requires negotiating with local unions.
POLICE/AMBULANCE/FIRE: Police – 736-3622, Ambulance – 736-5411, Fire – 736-6500.
TELEPHONES: No telephone jacks available on any dock.
SERVICES: Laundry can be done, but takes considerable time. Food stuffs are available, including fresh produce.
SHORE LEAVE: No restrictions.
IDENTIFICATION CARDS: Seaman's I.D. card is sufficient.
REGULATIONS: No unusual regulations.
DELAYS: Private owner's dock is only dock being used for cargo.
DEVELOPMENTS: None, except Government Wharf and Shed is being taken over for extended Buoy Depot and Shed will be demolished and Wharf will be used by Government vessels.
AUTHORITY: Canadian Coast Guard Base, Harbour Master, Amherstburg.

BADDECK, N.S.: 46.06 N. 60.44 W.

DOCUMENTS:
4 Crew Lists.
Customs Documents.
Harbour Dues Receipt.
Stores List.
Derating Certificate.
Safety Regulations.
Clearance from Last Port.
PILOTAGE: Compulsory. Pilot station at Table Head, see Canadian chart 4367.
ANCHORAGE: Good anchorage in lake. Depths 50 to 500 ft.
RESTRICTIONS: Can be restricted by heavy fog, tide, ice.
MAX. SIZE: Largest vessel to dock 497 ft. long, 66.7 ft. wide. Draft 28 ft.
HEALTH: Pratique obtained at Sydney, N.S.
RADIO: Sydney Radio
BERTHING: The dock is 330 ft. in length, with an approach way of 80 ft. length, making an "L" shape. Depth alongside at LW is 15 ft. at the inner end and 25 ft. at the outer end.
TUGS: None.
MEDICAL: No advance notice required. Hospital available.
DENSITY: In sea 35/1000. In lake 25/1000.
FRESH WATER: Supplied at 20 t.p.h.
FUEL: None available.
CERTIFICATES: Registry, Derating and Safety Certificates.
CUSTOMS ALLOWANCE: Tobacco, 100 cigarettes per week or 0.5 lb. tobacco. Wine/spirit: None.
CONSULS: None.
REPAIRS: Minor repairs only.
HATCHES: Normally opened and closed by crew.
AIRPORT: 55 miles. Served by regular airlines.
TIME: GMT minus 4 hours. Advance 1 hour in Summer.
HOLIDAYS: Sundays and Statutory holidays; New Year's Day; Good Friday; Easter Monday; Victoria Day; Canada Day; Labour Day; Thanksgiving Day; Remembrance Day; Christmas Day.
POLICE/AMBULANCE/FIRE: 295 2350, 292 2032, 295 2110.
TELEPHONES: None available for placing on board.
AUTHORITY: Dept. of Transport.

BAIE COMEAU, Quebec: 49.15 N. 68.09 W.

PORT LIMITS: Starting from a point on the Southern limit of Baie Comeau at Pointe St. Gilles 49° 12′ 10″ N., 68° 08′ 41″ W. Thence, North-eastward to Pointe St. Pancrace, 49° 15′ 14″ N., 68° 04′ 43″ W.

All waters inside of these points are understood to be part of Baie Comeau Harbour.

DOCUMENTS: Baie Comeau is a Port of Entry. Custom and Immigration facilities are located in the Town of Baie Comeau. All vessels arriving from Foreign Ports will be boarded by Custom and Immigration Officers.

The following forms are to be completed prior to arrival at the first Canadian Port:
3 copies Immigration Crew List, IMM-200
3 copies Crew Declaration, Y-14
3 copies Ship's Stores, E-1
3 copies Passenger List, IMM-264
2 copies Quarantine Service, *Q-S-1
*To be supplied by Quarantine Officer on arrival.

ETA: Advise Agent 72, 24 and 4 hours before arrival. Include fuel and stores requirements.
PILOTAGE: Not compulsory. The services of a qualified Docking Master are available through the facilities of Cargill Grain Company. Docker instructions will be given by radio after receiving vessel's ETA.

Normally the Docking Master boards from tug approximately 0.5 mile S.W. of Pointe St. Pancrace.

RESTRICTIONS: Port open for shipping all year round. Deep water approaches without restrictions for any vessel able to berth alongside.

ICE ADVISORY SERVICE: Ships inbound for Baie Comeau from seaward between December 15th and April 15th should advise the Ice Information Officer, Sydney, N.S., 36 hours prior to entering Cabot Strait stating their position, destination, whether loaded or in ballast. This procedure will facilitate the passing of ice information to the ship as necessary.

On request, ice information is also available from Marine Radio Stations at Halifax, Camperdown, Seven Islands, Twillingate and Grindstone. The Canadian Broadcasting Corporation Maritime network also broadcasts ice information daily during the Winter navigation season. Supplementary ice information may also be obtained from Canadian Marine Service icebreakers.

During the ice season, radio broadcasts of ice information are made twice daily from Marine Radio Stations as follows:

		Call Frequencies	
Cape Race, Nfld.	VCE	420	kc/s CW
		2582	kc/s RT
Fox River, Que.	VCG	434	kc/s CW
		2582	kc/s RT
Mont-Joli, Que.	VCF	446	kc/s CW
		2582	kc/s RT
North Sydney, N.S.	VCO	489	kc/s CW
		2582	kc/s RT
Halifax	CFH	115.3	kc/s CW
		6949.5	kc/s
		8662	
		12984	
		17218.4	

MAX. SIZE: Up to 40 ft. draft at Docks No. 1 and 2. Size limited only by berth depth.

RADIO: Mont-Joli Radio VCF 2582 kc/s (VHF, CRM Co. Ltd., Wharf Office, base to ships on marine frequencies) (Channel 7A – 156.350 mHz and Channel 16 – 156.800 mHz, call XJS94).

HEALTH: Incoming vessels making Baie Comeau port of entry must obtain pratique by wireless. Radio pratique may be obtained between 0900 hrs. and 1700 hrs. the day preceding arrival. Address message "Quarantine Quebec": For the purpose of radio pratique, vessels are required to give the following information:

1. Name and nationality of vessel.
2. Ports called at during voyage.
3. Nature of cargo.
4. Number of crew.
5. Number of passengers.
6. Port of destination and name of Agent.
7. Number of persons without valid certificates.
8. Condition of health of all on board with details of any sickness or death which has occurred during the voyage.

Ships arriving in English Bay in Quarantine will be inspected by Health Officer at anchorage or on arrival alongside. Should Officer board vessel at anchorage, proper accommodation ladder must be provided.

Smallpox Vaccination Certificates to be ready for inspection on arrival.

TUGS: Available. Not compulsory except for Cargill Grain Terminal.

BERTHING:

Dock No. 1: Department of Transport Wharf: berth 456 ft. long, depth 28 ft.; berth 360 ft. long, depth 25 ft. North Shore Paper Company: 1,000 ft. wharf, depth 27 ft. Dock Pier: 2 berths, 422 ft. long, 20 ft. depth.

Dock No. 2: Canadian Reynolds Metals Co., Ltd. Wharves consist of breakwater and approach jetty called Berth No. 1, 540 ft. long. Berth Nos. 2 and 3 in slip, 587 ft. and 551 ft. long respectively. The docking area is dredged to 30 ft. at low water at Berth No. 1 and 31 ft. at Berths Nos. 2 and 3 and flares out to marker buoy (Fl. red Ev. 12 secs.) at Northern extremity and 1,000 ft. to its Southern extremity, where depth of water increases rapidly off shore from approximately 400ft. East of breakwater. A port hand can buoy marks dredging out from S.E. corner of No. 1 Berth.

Dock No. 3: Cargill Grain Terminal, North Pier, 2 loading berths, length 585 ft., North side dredged to 40 ft., South side dredged to 38 ft. Loading capacity 2,000 long t.p.h.

South Pier, 1 unloading berth, length 720 ft., North side only dredged to 29 ft. Discharge rate 1,000 long t.p.h.

STEVEDORES: Each terminal employs own stevedores.

MEDICAL: All facilities available. Local Hospital in Baie Comeau and Hotel-Dieu, Hauterive, 5 miles.

DENSITY: 1000–1025.

FRESH WATER: Delivered by pipe-line to the berths.

FUEL: Available by pipe-line to Cargill Grain Terminal.

REPAIRS: Minor repairs may be effected through local contractors.

IDENTIFICATION CARDS: Gate passes are issued at the gate to all Crew members when going ashore for the purpose of identity on their return.

AIRPORT: Daily service to Quebec and Montreal.

CUSTOMS ALLOWANCES: 200 cigarettes for each man. Officers may be allowed 1 bottle wine/spirits, Master up to 5 bottles.

TIME: GMT minus 5 hours. Daylight Saving Time: GMT minus 4 hours, applied from last Saturday of April until last Saturday of October each year.

SHORE LEAVE: Crew members allowed ashore. No restrictions.

HOLIDAYS: New Year's Day; Epiphany; Good Friday; Ascension Day; St. John the Baptist Day; Labour Day; All Saints' Day; Christmas Day. No work performed on these holidays.

AUTHORITY: Canadian Department of Transport, Harbour Master.

BELLEDUNE, N.B.: 47.55 N. 65.51 E.

A deep water harbour administered from Saint John, N.B. and serving Belledune Fertilizers and other projects in the Bathurst area. This harbour is open to shipping all the year round.

DOCUMENTS: See "Saint John".

PILOTAGE: Pilotage is not compulsory, however, should a Pilot be required, the services of a local Berthing Master Mariner are available on request.

Regardless of pilotage, estimated times of arrival should be given to Belledune Fertilizers Ltd. 72, 48 and 24 hrs. before.

ANCHORAGE: Vessels wishing to anchor will find no difficulty in obtaining an anchorage in more than 10 fathoms, approximately one mile to the northward of the Belledune Breakwater.

TUGS: None available. May be obtained from Halifax.

BERTHING: One berth, length 550 ft., depth at LW, 34 ft.

TIDES: Tides normally rise 6 ft. at springs and 3 ft. at neaps. Tidal current seldom exceeds one knot.

STEVEDORES: Bulk cargoes handled by Belledune Fertilizer Ltd., and general cargo by Longshoremen.

CRANES: Heavy-lift equipment available from private companies. Cranes up to 25 tons available.

MEDICAL: Hospital at Bathurst.

FRESH WATER: Available. Delivered by tank trucks upon arrangement with Belledune Fertilizers Ltd.

FUEL: None locally. Can be obtained and delivered by tank trucks.

CONSULS: None.

REPAIRS: Minor repair facilities at Belledune Fertilizers Ltd. machine shop.

STORES: All types of provisions as well as deck and engine stores can be obtained at Bathurst for delivery to Belledune.

AUTHORITY: National Harbours Board, Saint John.

Local Representative: Belledune Fertilizers Ltd.

BOTWOOD, Newfoundland: 49.09 N. 55.20 W.

(See Plan Book)

DOCUMENTS:

2 Crew Lists.
2 Passenger Lists.
3 Crews Declaration (Can. Form Y14).
3 Stores Lists (Can. Form E.1).
Health Declaration (Can. Form QS. 2001).
3 Cargo Manifests.
3 Bills of Lading.

PILOTAGE: Compulsory. Pilot boards off Surgeons Head Light, Exploits Burnt Island day or night. Pilot station and boat equipped with VHF. Coastal pilotage service from St. Johns to Botwood available on request.

RESTRICTIONS: Navigation season from mid-April to mid-January approximately. Ice-breaker assistance may be necessary in Winter months. Deep water approaches.

ANCHORAGE: In Botwood Harbour, off the oil dock in depths of 10–20 fathoms.

MAX. SIZE: Up to 32 ft. draft.

RADIO: Comfort Cove, St. John's, St. Lawrence or Corner Brook.

HEALTH: Health Officer boards on arrival. Valid smallpox vaccination certificates required.

TUGS: None available.

BERTHING: *Pier No. 1:* owned by Price (Nfld.) Pulp & Paper Ltd., used exclusively for handling newsprint outward and caustic soda inward. Is 500 ft. long; min. depth alongside 32 ft., is adjacent to newsprint storage shed. capacity 20,000 tons (standard newsprint).

Pier No. 2: Layberth only, 900 ft. long, min. depth alongside 32/35 ft., owned by Price (Nfld.) Pulp & Paper Ltd.

Pier No. 3: 600 ft., owned by American Smelting & Refinining Co., used for shipping concentrates, and discharging Bunker "C" fuel and Sulphur inward. Min. depth alongside 32 ft. Concentrates loaded by one fixed conveyor.

Ministry of Transport finger pier: Length 150 ft., min. depth alongside 35 ft. Face is 23/25 ft. Is connected by pipe-line to bulk fuel storage tanks, owned by Golden Eagle Refining Co. Ltd., and is used primarily for discharging of clean fuels.

Ministry of Transport general cargo wharf and shed: Wharf 269 ft. long, 103 ft. in breadth, cargo shed 200×70 ft., 20 ft. clear height below steel girders. Apron of wharf is 33 ft. wide with access driveway extending around each end of shed to main roadway. Rear cargo doors from shed open at truck level to facilitate mechanical handling. Front and end doors are wharf level.

MEDICAL: Doctors, hospital facilities available.

FRESH WATER: Available at all berths.

FUEL: Only light diesel available.

REPAIRS: Minor repair and diving services only.

SURVEYORS: Lloyd's and Norske Veritas at St. John's.

CUSTOMS ALLOWANCES: 200 cigarettes for each man. Officers may be allowed one bottle wine/spirits, Master up to five bottles.

TIME: GMT minus five hours. Daylight Saving Time: GMT minus four hours, applied from last Saturday of April until last Saturday of October each year.

SHORE LEAVE: Allowed. No restrictions.
HOLIDAYS: Good Friday; Labour Day; Christmas Day and Boxing Day. No work performed on these holidays.
AIRPORT: Gander International Airport, 60 miles away.
AUTHORITY: Ministry of Transport.

BRIDGEWATER, N.S.: 44.23 N. 64.31 W.

(See Plan Book)

DOCUMENTS: See "Halifax".
PILOTAGE: Compulsory. Report ETA by radio-telephone or radio-telegraph to Superintendent of Pilots, Halifax, N.S. at least 12 hours before arrival at boarding station. ETA to be confirmed 3 hours before arrival. Pilot boards off Moshers Island Light.
RESTRICTIONS: Port is situated on La Have River, 10 miles from the sea. Channel path at low water, 20 ft.
ANCHORAGE: At Dayspring, 2 miles below Bridgewater.
MAX. SIZE: Length 325 ft. Draft 20 ft.
RADIO: Halifax Radio.
HEALTH: Pratique granted by Customs officer who boards on arrival at the berth. Also see "Montreal".
BERTHING: Dept. of Transport wharf, berthing length, 1,073 ft. Depth alongside 20 ft.
FRESH WATER: Available ex wharf only on West side of river.
FUEL: Diesel available by truck.
REPAIRS: Limited facilities for engine repairs.
STEVEDORES: Available.
MEDICAL: Hospital facilities available.
HOLIDAYS: Dominion Legal holidays.
AIRPORT: Nearest approximately 90 miles away.
AUTHORITY: Harbour Master, Glayden Conrad.

CHARLOTTETOWN, P.E.I.: 46.14 N. 63.07 W.

(See Plan Book)

DOCUMENTS:
Port clearance from previous port.
3 QS.2001 Quarantine, if from other than U.S. port or St. Pierre et Miquelon.
3 HA.282 Garbage Disposal Warning.
2 IMM.200 Crew List, only Canadian documentation acceptable.
3 E1 List of Ship's Stores. May use own documentation.
3 71 Crew's Declarations. May use own documentation.
2 A6 Report Inwards.
PILOTAGE: Compulsory. Only one Pilot active with privately owned boat. Pilot taken on board at Fitzroy Rock buoy. No alternate area in event of bad weather. Vessels anchor 4 cables South of Fitzroy Rock buoy to await Pilot.
ANCHORAGES: Anchorage inside harbour at Three Tides – 46° 13′ N. 63° 08′ 30″ W. Average depth of water 30 ft.
MAX. SIZE: Draft 31 ft.
HEALTH: Pratique procedure carried out by Customs Officers. (Form QS1).
RADIO: VCA Charlottetown Marine Radio.
TUGS: None.
STEVEDORES: No prior advice required.
MEDICAL: Several hospitals and ambulance facilities available if required.
TANKERS: Three discharging docks – one at Railway Wharf, Imperial Oil pipe-lines as follows: one 12 in., two 10 in. and two 6 in., draft at dock 32 ft. (2) Texaco Canada Ltd., private dock – two 8 in. pipe-lines, draft 24 ft. (3) Irving Oil Co. Ltd., private dock, two 8 in. and two 10 in. lines, 32 ft. draft.
FRESH WATER: Available at Railway Wharf.
FUEL: Diesel and bunker fuels available by tank wagon.
GANGWAY/DECK WATCHMEN: Watchmen service if required. Not necessary.
OPENING/CLOSING HATCHES: Stevedores work hatches which are not mechanically operated.
CUSTOMS ALLOWANCES: Tobacco 200 cigarettes or 0.5 lb. tobacco or 15 cigars per man per week. Wine and/or Spirit: 40 oz. per week, but issues of liquor in port will be restricted to ship's officers.
IDENTIFICATION CARDS: Not required unless disembarking. Crew members then should possess Seaman's Book and/or Passports.
REPAIRS: Minor repairs only.
REPATRIATION: Facilities are available.
AIRPORT: 4 miles distant with daily flights by Eastern Provincial Airways and Air Canada.
TIME: GMT minus 4 hours, May to October GMT minus 3 hours.
HOLIDAYS: New Year's Day (January 1st); Easter – varies (Good Friday); Victoria Day – Monday prior to May 24th; Dominion Day (July 1st); Labour Day (1st Monday in September); Thanksgiving (2nd Monday October); Remembrance Day (November 11th); Christmas Day (December 25th). Christmas Day is the only holiday stevedores will not work.
POLICE/AMBULANCE/FIRE: Police, 894–5513; Ambulance, Call operator "O", Fire, 894–3113.
TELEPHONES: No hookup available.
GENERAL: Passenger vessels – a list of all saleable articles contained in barber shops, souvenir stands, display cases, company operated outlets, etc. to be attached to Stores Lists to facilitate sealing by customs. Responsible ship's officer to advise location of outlets.
SHORE LEAVE: No restrictions.
AUTHORITY: District Manager, Dept. of Transport and Port Manager.

CHATHAM and NEWCASTLE, N.B.: 47.00 N. 65.33 W. 47.02 N. 65.28 W.

DOCUMENTS:
Previous port clearance.
2 Immigration Crew Lists.
3 Ship Stores Lists.
3 Crew Declaration.
Deratting Certificate.
Health of Animals.
Load Line Certificate.
Safety Equipment.
Safety Construction.
Ship's Register.
Health Declaration (QSI).
PILOTAGE: Contact Agent for Pilot at least 12 hrs. in advance. Pilot boat, wooden hull, length 44 ft., grey, Pilot flag about 20 ft. above sea-level. Apr. 16 to Dec. 9 Pilot taken aboard 2 miles North of Escuminac Breakwater. In event of very bad weather good anchorage Egmont Bay, PEI. Dec. 10–Apr. 15 Pilot boards at Eddy Point NS when inbound from East. In other cases Pilot boards at point of departure in Canada.
MAX. SIZE: Max. length 550 ft., max. draft 21 ft. 06 in.
HEALTH: Pratique procedure carried out by Customs Officer (complete form QS 1).
RADIO: Use Grindstone (VCN) or Charlottetown Radio (VCA), or Escuminac Pilot (Channel 16).
TUGS: Not required.
BERTHING: Approx. 3 hrs. from Pilot station to Berth.
BRIDGES: Bridge at Chatham 127 ft. clearance high tide. Hydro wires at Middle Island 125 ft. at 60 degrees Fahrenheit at lowest point, channel wide at this point, able to get 180 ft. clearance. Morrisey Bridge, max. span opening is 99 ft. Overhead cables at Morrisey Bridge.
STEVEDORES: Notice at least 12 hrs. before arrival.
MEDICAL: Hotel Dieu Hospital, Chatham and Miramichi Hospital, Newcastle.
TANKERS: Hose connections 6 in.; no slop discharge facilities.
FRESH WATER: Available only at Government piers at Chatham and Newcastle.
FUEL: All types by tanker truck.
GANGWAY/DECK WATCHMEN: Not necessary.
CUSTOMS ALLOWANCES: 200 cigarettes/man/5 days. Spirits: 40oz./man/5 days.
CREW IDENTIFICATION CARDS: Not needed.
CONSUL: Danish Consul in Newcastle.
REPAIRS: Light repairs by Miramichi Foundry and Arvin Speciality Machines.
REPATRIATION: Facilities good.
AIRPORT: Chatham. Daily flight to Montreal.
TIME: Atlantic Standard, 4 hours difference GMT. Change from Standard to Daylight Saving last Sunday in April through last Sunday in October. (1 hour forward).
HOLIDAYS: No work Labour Day, Armistice Day, New Brunswick Day. Other holidays may be worked on overtime.
POLICE/AMBULANCE/FIRE:

	Newcastle	*Chatham*
Police:	622–2111	773–4436
Ambulance:	Through Police	773–3492/733–4321
Fire:	622–2500	773–5856

SHORE LEAVE: No restrictions.
DELAYS: Not normally.
DEVELOPMENTS: Feasibility study to dredge to 27 ft. draft completed. No approval received or dates set for dredging.
GENERAL: Charts required (Canadian) 4023 – Northumberland Straits, 4423 – Miramichi Bay, 4424 – Miramichi River, Sailing Directions – Gulf and St. Lawrence. Tides; Spring 5.75 ft. Neaps; 4 ft. Night navigation possible.
AUTHORITY: Port Manager, Newcastle.

CHEMAINUS and CROFTON, B.C.: 48.55 N. 123.42 W.

DOCUMENTS, PILOTAGE, HEALTH, CONSULS etc.: Refer to "Vancouver, B.C.".
ANCHORAGE: Available in Houston Passage.
RESTRICTIONS: Channel depth 48 ft. MLLW. Restricted by berth size only.
TUGS: Available. Tugs for Crofton are ordered from Chemainus.
BERTHING:

		Berth length	*Depth alongside MLW*
Chemainus:	Wharf A	515′	35′
	Wharf B	490′	40′
Crofton:	Lumber Berth	400′	35′
	Pulp Dock	457′	35′

No loading gear installed at Crofton berths.
STEVEDORES: 22 gangs available. Refer to "Vancouver, B.C.", for holidays, etc.

MEDICAL: Doctors and hospitals facilities available at Chemainus, 5 miles from Crofton.
DENSITY: Salt water.
FRESH WATER: Available at wharves.
FUEL: Supplied by barge from Vancouver, B.C.
CUSTOMS ALLOWANCES: See "Vancouver, B.C.".
REPAIRS: Repairs arranged from Victoria or Vancouver Shipyards.
AUTHORITY: Department of Transport, Harbour Master.

CHICOUTIMI, Quebec: 48.25 N. 71.02 W. (See Plan Book)

DOCUMENTS:

2 Crew Lists.
2 Passenger Lists.
3 Crews Declaration (Can. Form Y14).
3 Stores Lists (Can. Form E.1).
Health Declaration (Can. Form QS. 2001).
3 Cargo Manifests.
3 Bills of Lading.

PILOTAGE: Pilotage is compulsory. Pilots board vessels that are Westerly-bound at Anse-aux-Basques and Easterly-bound at Quebec City. The Master of every ship inward bound in the Gulf of St. Lawrence and destined for ports West of Anse-aux-Basques must report his ETA to Pilots Montreal via Marine Traffic Control on VHF radio Channel 14 (156.7 mHz) or by other means of communication to Seven Islands radio station VCK giving his ETA to Escoumains pilotage station and the net registered tonnage of his vessel.

A minimum notice of 12 hours must be given to ensure the availability of Pilots at Anse-aux-Basques for vessels proceeding from the Gulf to Chicoutimi.

This notice must be confirmed 3 hours prior to arrival at the Pilot station by radio-telegraph or radio-telephone as mentioned above.

The Pilot station for vessels upbound to Chicoutimi is located at Anse-aux-Basques, charted 2 miles S.W. of Les Escoumains Wharf on the North shore of the St. Lawrence River. Two Pilot boats are constantly on service.

ANCHORAGE: At St. Fulgence, 6 miles before Chicoutimi.
RESTRICTIONS: Navigation season from mid-April to end November approximately. Channel depths 20 ft. LW up to oil terminal and 16 ft. low water above oil terminal.
MAX. SIZE: Up to 25 ft. draft.
RADIO: Riviere du Loup Radio Station.
HEALTH: Pratique may be obtained by radio to Quarantine Quebec. Health Officer boards on arrival. Valid smallpox vaccination certificates required.
TUGS: None available.
BERTHING: Main Wharf, 2,600 ft. berthing length, 30 ft. depth alongside.
CRANES: Two cranes for bulk cargoes 5 tons capacity.
TANKERS: *Albert Maltais Oil Berthing Pier:* Located in main channel to the port off Pointe-a-l'islet. Length of berth 40 m. Depth alongside 9 m. (30 ft.) at low water. Max. size: 130 m. (430 ft.) and not over 10,000 tons. Pipe-line: length 460 m. (1,500 ft.) diameter 2×25 cm. (10 in.). Vessels moor to buoys fore and aft.
DENSITY: Fresh water.
MEDICAL: Doctors, hospital facilities available.
FRESH WATER: Available at all berths.
FUEL: Available at oil berth.
REPAIRS: Minor machine shop repairs only.
CUSTOMS ALLOWANCES: 200 cigarettes for each man. Officers may be allowed 1 bottle wine/spirits, Master up to 5 bottles.
TIME: GMT minus 5 hours. Daylight Saving Time: GMT minus 4 hours, applied from last Saturday of April until last Saturday of October each year.
SHORE LEAVE: Allowed. No restrictions.
HOLIDAYS: New Year's Day; Epiphany; Good Friday; Ascension Day; St. John the Baptist Day; Labour Day. All Saints' Day; Christmas Day. No work performed on these holidays.
AUTHORITY: National Harbours Board.

CHURCHILL, Man.: 58.47 N. 94.12 W. (See Plan Book)

DOCUMENTS:

3 Crew Lists.
3 Passenger Lists (if applicable).
3 Ships Stores Lists.
2 Quarantine Certificates.
1 Certificate for Harbour Master to be prepared after approval.
1 Certificate that Gyro Compass in order certified plus copy of manifest giving weight or measurement for each Bill of Lading. Certification by Local Collector of Customs.

PILOTAGE: Pilotage is not compulsory, but the pilotage fee is compulsory. Pilots board ships outside the harbour within a radius of 5 miles from Eskimo Point. The fee is $100 per ship inward and $100 dollars per ship outward. Moving vessel within harbour is $70.

Vessels must advise their ETA at the port, and should also advise their time of arrival at Fairway Buoy.

Requests for Pilots should be submitted through the local marine radio. Pilots embark from vessels at the Fairway Buoy. The tug "Twolan" is used as pilot boat.

ANCHORAGES: Inside the harbour, there is anchorage room for one small vessel in 30 ft. of water about 0.75 miles N.W. of wharf. There is insufficient swinging room at this anchorage for large vessels. Large vessels anchor outside the harbour. The outside anchorage is exposed and vessels in a light condition may find it difficult to maintain their anchorage, particularly with a strong N.E. wind.
RESTRICTIONS: Vessels are usually brought in just before high tide, although vessels may enter any time. One spot in channel is 26 ft. at zero tide. All buoys and range lights are lighted.
MAX. SIZE: Max. length 600 ft. width 100 ft. and depth alongside wharf at zero tide is 31 ft. at three berths, 33 ft. at one berth, 22 ft. at Wolfe Berth and 20 ft. at the coastal Berth.
HEALTH: All vessels must fly yellow flag until cleared by authorities after docking.
RADIO: Department of Transport, Marine Aeradio Station call sign VAP, Channels to be used: 16 for calls and replies, 12 for harbour control, as well as Channel 26.
RADAR: Requirements as laid down by Arctic Pollution Prevention Regulations.
TUGS: Tugs usually join vessels inside the harbour. Two tugs available. Ship's lines used.
BERTHING: Max. allowable salt water draft at sulphur berth 32 ft., thereafter topping-up with the tide for a few more inches. Sulphur is brought by rail truck from Alberta Mines, and loading rate 4,000 tons per day.

Loading capacity for bulk grain is 60,000 bushels/hour.

CRANES: Heavy lift crane of 35 tons capacity.
STEVEDORES: Gangs are available during whole of shipping season, no advance notice required.
MEDICAL: Fully staffed and equipped hospital available, approximately 1 mile from harbour.
TANKERS: Discharge pipes 4 in. diameter. One berth available with max. depth of 33 ft. at zero tide.
FRESH WATER: Fresh water available at all berths. Water pumped through 2.5 in. pipe connected directly to ship, discharged at rate of approximately 1 ton/min.
FUEL: Bunker fuel requires 30 days advance notice. Arctic fuel available all times.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Carried out by ship's crew.
CUSTOMS ALLOWANCES: See "Montreal".
CONSULS: None.
REPAIRS: Most repair work. Fully equipped machine shop available.
DRY DOCKS: None.
SURVEYORS: By arrangement.
CARGO GEAR: Ship's gear.
AIRPORT: Airport situated 5 miles from the harbour and served by TransAir, with 2 flights going North and 6 flights South every week.
TIME: GMT minus 6 hours. Daylight Saving Time (1 hour forward starts first Sunday in May and ends last Sunday in October).
HOLIDAYS: New Year's Day (January 1st); Good Friday; Easter Monday; Victoria Day (May 24th); Dominion Day (July 1st); Civic Holiday (1st Monday in August); Labour Day (First Monday in September); Thanksgiving Day (Second Monday in October); Remembrance Day (November 11th); Christmas Day (December 25th); Boxing Day (December 26th).

Arrangements normally made to have crews available for those days.

POLICE/AMBULANCE/FIRE: Police, 675-2422; Ambulance, 675-8881, Fire, 675-2424.
TELEPHONES: No facilities.
SHORE LEAVE: Allowed, no restrictions.
DEVELOPMENTS: Dredging underway to remove 26 ft. restriction mentioned above, see "Restrictions".
DELAYS: Little delay.
AUTHORITY: The Port Manager, National Harbours Board.

CLARENVILLE, Newfoundland: 48.08 N. 53.56 W.

DOCUMENTS:

Crew List, Form 200 in duplicate.
List of Ship's Stores, Form E1 in duplicate.
Crew Declarations, Form Y.14 in duplicate.
Manifests in triplicate.
Bills of Lading in duplicate.

PILOTAGE: Contact Pilot through St. John's Radio. VON.
MAX. SIZE: Largest ship 600 ft. long, breadth 74 ft., draft 26 ft.
HEALTH: See "Montreal".
RADIO: St. John's Radio. VON.
TUGS: No tugs available from St. John's.
STEVEDORES: Available. 48 hours notice required.
MEDICAL: Necessary for Agents to receive advance notice of medical attention required. Hospitals available at Come By Chance (30 minutes distance by road) and St. John's Vaccination/Fever Certificates necessary for pratique.
FRESH WATER: Limited supplies available.
FUEL: Light fuels only (no bunkers).
OPENING/CLOSING HATCHES: By crew.
CERTIFICATES: Load Line, Safety Equipment, Deratting Certificates.
CUSTOMS ALLOWANCES: Tobacco 200 cigarettes allowed per crew member per week. Wine and/or Spirit, 1 bottle of spirit allowed per crew member on the first voyage in each year. Each subsequent voyage in one year, 1 bottle allowed only to officers.
IDENTIFICATION CARDS: Not required.
CONSULS: At St. John's.
REPAIRS: Temporary only.

REPATRIATION: Only available by air.
AIRPORT: Gander International Airport located about 2 hours distance by road/served by regular airlines.
TIME: Eastern Standard Time GMT minus 5 hours. Daylight saving time from last week-end in April to last week-end in October, clocks advanced 1 hour.
HOLIDAYS: See "Montreal".
POLICE/AMBULANCE/FIRE: Police 7830; Fire 7777; Ambulance 466-2400.
TELEPHONES: No facilities for placing on board.
SERVICES: Only limited services available.
SHORE LEAVE: Allowed.

AGENT: Newfoundland Hardwoods Ltd.

COME BY CHANCE, Newfoundland:
47.48 N. 54.01 W. **(See Plan Book)**

LOCATION: The Come By Chance oil terminal operated by Provincial Refining Co. is located in Placentia Bay, Lat. 47° 48′ 18″ N. Long. 54° 00′ 35″ W.
DOCUMENTS:
3 copies Crew Declaration (Form Y14).
3 copies Ship Stores List (Form E1).
3 copies Immigration Crew List (Form IMM 200) only Canadian form accepted.
2 copies of Bill of Lading or Manifest.
In addition, clearance from last port, Deratisation Certificate, extra copy of Crew List, Vaccination List, Ship's Register, Radio Equipment Certificate, Safety Equipment Certificate, Load Line Certificate and Non-Canadian Ship Compliance Certificate. Oil record log book should be up to date and readily available for inspection by Government steamship inspectors.
PILOTAGE: *Ship's Officer's Report:* Pilotage is compulsory. Pilots board off Argentia (position 47° 21.9′ N., 54° 04.6′ W.) by prior arrangement with St. John's Pilotage. An ETA message (preferably in GMT) should be sent at least 12 hours before arrival to "Coast Guard Traffic Centre St. John's". The message should state the following:

Name of ship. Call letters. Draft. Gross tonnage. Length. Breadth. Moulded depth. Destination.

Confirmation or amendment of the ETA should be sent 6 hours prior to arrival.

The pilot boat is approximately 50 ft. long with a black hull and white housing. It has "Pilot" painted on the housing and flies the pilot flag – white over red horizontal stripe.

VHF channels are allotted to various areas in Canadian waters but in the absence of this information contact can be established in the first instance on Channel 16. The most frequently used Channels are numbers 6, 11, 12 and 14. In general Channel 6 is used by tugs and 11 by Pilots in pilotage waters.

It is anticipated that there will be no pilotage in Placentia Bay during the hours of darkness for a period of at least two years for vessels of over 50,000 d.w.t.

The pilotage routes used are as follows:

Latine Pt. (Argentia)	097°×4.6′	Co 019°
to		
Margery Cove (N. of Red Is.)	291°×2.7′	Co 021°
to		
Buffett Is. (E. of Long Is.)	275°×2.7′	Co 350°
to		
Green Is. (Off Long Is.)	260°×2.8′	Co 351°
to		
Cheese Is. – N. End (N. of Long Is.)	261°×1.6′	Co 000°
to		
Grassy Pt.	090°×1.2′	Co 022°

COAST GUARD TRAFFIC CENTRE: A vessel traffic management centre has been established at Argentia. Operation on a 24-hr. basis; this centre will provide radar surveillance off Placentia Bay. Masters are required to establish communication with this station when in VHF range on Channel 16 in accordance with Notice to Mariners, in order to provide vessel's identification and obtain information regarding pilotage, buoyage, weather conditions, etc.
ANCHORAGE: Will be assigned by the Pilot in conjunction with the Department of Transport.
Ship's Officer's Report: The following areas have been designated as anchorages:

Area A	47° 43′ 45″ N.	54° 01′ 40″ W.
Area B	47° 45′ 45″ N.	54° 09′ 15″ W.
Area C	47° 43′ 22″ N.	54° 10′ 45″ W.

RESTRICTIONS: Will be dispatched by the Department of Transport to ship's Agent.
MAX. SIZE: Tankers of 327,000 d.w.t., can be accommodated.
Also see "Berthing".
HEALTH: Vessels arriving from a foreign port may obtain pratique by radio from "Quarantine St. John's" at least 12 hrs. before arrival. Information required by Quarantine Officer shall include:
Name and nationality of the vessel.
Last port of call.
Nature of cargo.
Number of crew and passengers.
Port of destination.
Name of Agent.
Conditions of health of all on board with details of any sickness or death incurred during the voyage.
Animals if any.

RADIO: The best radio stations to use en route to Come By Chance are:
St. John's Marine Radio – call sign VON.
Halifax Marine Radio – call sign VCS.
St. Lawrence Marine Radio – call sign VCP.
TUGS: Four tugs available to assist berthing and unberthing. Each is equipped with 2,640 h.p. drive and capable of a bollard pull of 37 tons. Two are equipped for fire fighting and the other two suitably designed for ocean towing. Tugs lines are used.

Tugs will meet the ship off Bordeau Island, approximately 4.5 miles from the berth.
BERTHING: The jetty extends 3,000 ft. from the shore. Berth No. 1 (outside) can accommodate 327,000 d.w.t. tankers. Depth of water alongside 100 ft. Berth No. 2 (inside) can accommodate tankers up to 67,000 d.w.t. Depth of water alongside 52 ft. This berth used mainly for refined products.
Ship's Officer's Report:
The quay is designed for the use of tankers. There are no provisions for general cargo ships. Tankers of up to 500,000 d.w.t. with a max. draft of 90 ft. can be accommodated on the West side, and on the East side ships of up to 60,000 d.w.t. with a max. draft of 48 ft.

The length of the quay is 1,520 ft. and the height was measured at HW and LW and found to be 19 ft. 6 in. and 25 ft. respectively. High water was taken to be half an hour later than the predictions at Argentia.

The bollards are of a German manufacture and each consists of a group of three hooks with quick-release mechanism. Each hook is designed to take a strain of 100 tons and is mounted in such a way as to be able to swivel independently in any direction towards the ship. An electric capstan is situated behind each bollard.

There are adequate fenders of the compression type.

A depth of 22 fathoms was recorded by echo sounder when alongside, the transmission unit being situated 52 ft. from the quayside.
MEDICAL: Masters are asked to notify their Agents at least 72 hours prior to arrival, advising the number of men to see the doctor and their complaint. The doctors work out of hospital which is about 10 miles from the berth.
TANKERS: No. 1 berth 4×16 in. arms which run into 42 in. lines. Bunkers 1×10 in. arm.

No. 2 berth 4×10 in. arms, bunkers 1×8 in. arm. Dirty ballast facilities on either berth. All ballast must be pumped ashore.
FRESH WATER: Available. If for any reason there is no water available, vessels will be advised by their Agent. Rate approximately 20 t.p.h.
FUEL: Ship's bunkers are available. Bunker requirements, including quantities and specifications, should be made known in the 72 hour message.

Bunkers are delivered concurrent with cargo operations. Bunkers should be stemmed by owners or charterers before arrival.
FIRE PRECAUTIONS: Usual precautions for a refinery.
CONSULS: The following countries have consular offices in St. John's:

Brazil	Netherlands
Denmark	Norway
Dominican Republic	Portugal
Germany (West)	Spain

REPAIRS: The Agent should receive early advice of requirements, as most repairs are only available at St. John's. Radio, radar, gyro, navigator and loran, etc., the technicians for such equipment work out of St. John's. The following brand names have representatives in St. John's: Decca, Marconi, Kelvin Hughes, Furono, Atlas and Sperry.
SURVEYORS: Stationed in St. John's, Lloyds, N.V. and B.V.
GANGWAY/DECK WATCHMEN: Usually ship's crew.
CUSTOMS ALLOWANCES: Each man 200 cigarettes and one 40-oz. bottle of wine or spirits per week.
Ship's Officer's Report: There are no Customs and Immigration offices in the port at present. Officials will therefore come from St. John's and board the ship on arrival alongside.
REPATRIATION: No formal facilities, but with little difficulty crew changes and repatriation can be carried out. Prior notice to Agent is required.
AIRPORT: Nearest airports presently at St. John's, 94 miles away, and the Gander International Airport, 128 miles away.
Ship's Officer's Report: There is a good road to St. John's which is 86 miles from the port. A passenger bus service is available and also a railway for goods only.

The nearest airport is at St. John's although there is a helicopter landing area within the refinery grounds.
TIME: GMT less 3.5 hrs. Last Sunday in April clocks advanced 1 hr. First Sunday in October clocks retarded 1 hr.
SUPPLIES & LAUNDRY: Stores and provisions have to be obtained in St. Jonn's. In order to avoid delays, Agents should be notified prior to arrival, of the vessels requirements. Stores and supplies will be delivered by barge, tug, or small boat. Laundry facilities are not available in Come By Chance, but if required will have to be sent to St. John's. Therefore, early notification is required.
TELEPHONES: Not available at present.
POLICE/AMBULANCE/FIRE: The police are located in Clarenville – tel. 466-7830. Ambulance is available on site – tel. 463-2458. Fire Department located in Clarenville – tel. 466-7777. Also Fire Department located on site – tel. 463-2458.
SHORE LEAVE: In order to comply with immigration regulations, crews should be carefully checked before sailing, and any missing seamen reported to Agent.

In case of seamen left ashore for any reason, Masters are requested to furnish a letter accepting responsibility for all expenses incurred, advances (if any) and also instructions for repatriation.

GENERAL: Masters are strongly advised to contact their Agent 72, 48, 36, 24, 12 and 6 hours with ETAs. On the 72 hour message Masters should advise all port requirements.

Gangway: Ship's gangway.

WEATHER: *Ship's Officer's Report:* The prevailing winds are from the S.W. in Summer and N.W. in winter. Fog is experienced regularly in April, May, June and July, the latter two months being the worst. The fog is usually associated with a Southerly wind.

There is no shelter afforded on the North, East and South sides of the quay and only a nominal amount on the West side.

Local pilots report that the range of tide is between 5.5 and 8.5 ft. which can increase if the wind has been blowing from the South for any length of time.

AUTHORITY: Department of Transport, Southside Road, St. John's, Newfoundland, and Provincial Refining Company, Come By Chance, Newfoundland. Tel. 463–8811. In Port – VHF Channel 16, Call sign VCA741.

AGENT: Blue Peter Steamship Limited, Come By Chance, Newfoundland. Tel. 463–8511. Telex 016–4755. Cable Address – Bluepeter Come By Chance. In Port – VHF Channel 16; After hours – 466–2913 or 466–7500.

Ship's mail should be sent to: Blue Peter Steamships Limited, P.O. Box 698, Clarenville, Newfoundland.

CONTRECOUER, Quebec: 45.53 N. 73.12 W.

(See Plan Book)

LOCATION: The Contrecoeur Transfer Dock is located on the South shore of the St. Lawrence River, approximately 25 miles East and downstream from Montreal. (Canadian Chart 1339, Admiralty 422).

DOCUMENTS, HEALTH, RADIO, etc.: Refer to "Montreal" and "Quebec".

PILOTAGE: Compulsory, Pilot meets vessel at Anse-aux-Basques. Boarding at all hours.

ANCHORAGE: Available at Lanoraie 15 miles East of dock and Sorel 20 miles East of dock. Also at Contrecouer, off the berth.

RESTRICTIONS: Hatch openings must not be less than 25 ft.×35 ft. Vessels will be required to vacate the berth immediately after completion of loading and/or discharging. Masters and/or Agents to advise ETA 36 hours, 24 hours and 12 hours. If any change after 12 hours notice, Terminal to be advised immediately, otherwise charges for waiting time will be assessed.

MAX. SIZE: 850 ft. length; 105 ft. beam; 35 ft. draft chart datum; fresh water, (subject river levels and recommended keel clearance, average river levels vary from +7 ft. above chart datum (April, May) to +3 ft. (Aug, Sept.) with extremes recorded of +10 ft. and +1.5 ft.).

TUGS: Tugs not normally required for vessels docking including vessels in 50,000 to 65,000 d.w.t. range. One tug sometimes used for vessels undocking.

RADIO: *Arrival notice*: Cable address: CONORE, Montreal. Master or Agent to advise the Terminal of vessel's ETA 48 hours, 24 hours, 12 hours and 6 hours prior to vessel's arrival.

BERTHING: Ships will be berthed in regular turn of vessels, providing they present with hatches open, ready for discharging and/or loading, based on the following reporting procedures;

i) Downbound vessel reported out Cote Ste Catherine lock before upbound vessel passes Trois Rivieres Pilot station will have precedence and vice versa.

ii) Downbound vessel reported clear of Montreal Wharf before upbound vessel passes Ile des Barques reporting station will have precedence and vice versa.

iii) In cases of two upbound vessels, the first passing Trois Rivieres Pilot station will be first in turn.

Berthing facilities: The dock is 1,500 ft. in length and is divided into two berths. Berth No. 1 is 750 ft. in length with dredged depth alongside of 35 ft. fresh water chart datum. It is fitted with two Wellman travelling towers equipped with 7.5 cu.yard grabs with outreach of 57 ft. from fenderline. The tower travel is 476 ft. centre to centre. Concrete pad measuring approx. 600 ft. × 140 ft. is located adjacent to berth No. 1 and can accommodate approx. 75,000 tons of material stowing less than 20 cu.ft./ton.

Berth No. 2 is 750 ft. in length with dredged depth alongside of 20 ft. chart datum. It is fitted with a stationary boom shuttle for loading bulk materials into vessels. This shuttle is reversible for loading to trucks or rail cars. Bulk commodities can be handled:

a) Direct from vessel to vessel.
b) Direct from vessel to truck or rail cars.
c) Indirect from vessel to pad for stockpiling by truck or reloading to vessel.

Unlimited storage capacity is available for stockpiling bulk materials. Material is reclaimed from dead storage area and returned by trucks to pad for reloading aboard vessels or into rail cars.

The working capacity of discharging or loading free digging bulk materials with a stowage factor of less than 20 cu.ft./ton is as follows:

Transferring direct from vessel to vessel	1600 L/T per hour
Discharging from vessel to dock	1800 L/T per hour
Loading from dock to vessel	1800 L/T per hour
Transferring from vessel to rail cars	900 L/T per hour
Transferring from vessel to trucks	1200 L/T per hour

The railway siding on the dock property can accommodate 70 railway cars. Dock storage and dead storage areas are available by arrangement. Materials can be held in bond subject to Canadian Government regulations.

STEVEDORES: Available at following times: Regular working periods are from 0800 to 1600 and from 1600 to 0000 hrs, Friday. Under special arrangement, work performed from 0000 to 0800 hrs, also on Saturdays, Sundays and legal holidays. Sunday overtime rate begins 0800 Sunday and ends 0800 on Monday.

MEDICAL: Doctor and hospital available.

FRESH WATER: Available.

FUEL: Available.

TIME: GMT minus 4 hours.

HOLIDAYS: Legal holidays are as follows: Good Friday, St. Jean Baptiste Day, Dominion Day, Labour Day, Thanksgiving Day, Ascension Day, Victoria Day, Remembrance Day.

AUTHORITY: This a private terminal owned by the Iron Ore Company of Canada.

AGENCY: Contrecoeur Terminal does not handle ship agency. Shipowners or Charterers appoint their own Agents for attending ships' requirements.

CORNER BROOK, Newfoundland: 48.57 N. 57.57 W.

DOCUMENTS:

3 Crew Lists Form: IMM.200.
5 Passenger Lists.
3 Crew Declaration Y.14.
3 Bonded Store List E.1.
2 Maritime Declaration of Health Form QS 2001. (Not required from USA port).
2 Manifests of Cargo (In Transit) and Manifest of cargo for discharge.
Bill of Lading.
All Crew members require valid smallpox vaccination certificates.
1 Clearance from Last Port. A.6.

Required by Agents – Vessel expiry dates for Canadian Customs

Load Line Certificate
Radio Equipment Certificate
Safety Equipment Certificate
Deratting Certificate
Safety Construction Certificate
Non-Canadian Compliance Certificate (Tankers only)

PILOTAGE: Pilot launch is called *Glenkim* fitted with radio telephone, receives on 2182, 2558, 2134 and 2582 kc/s. Radar and VHF onboard. Pilot Station, Frenchman's Head. Pilotage compulsory, operated by Atlantic Pilotage Authority with head office in Halifax. During the ice season, Pilots will board from tug *Indian Lake* approximately 1 mile from Bowater's berths. The tug is also fitted with VHF. Also see "Radio".

APPROACHES: The Corner Brook waterfront extends along the South shore of the Humber Arm for approximately 6 miles Westward from Humbermouth. The centre of the City waterfront is 21 miles from South Head. South Head commands the Southern entrance to the Bay of Islands. There are no off-lying shoals near the approaches.

ANCHORAGES: Good anchorages in Outer Bay. Most convenient is in Humber Arm off Petitpas Cove in 15 to 20 fathoms. Masters requested to contact local Pilots regarding anchorage as a submarine cable enters waters of Humber Arm at Wild Cove and continues out of the bay through Frenchman's Head.

HEALTH: Pratique is granted when all crew have been vaccinated and no suspected sickness on board. Pratique is automatic when from a quarantine port or non-quarantine port, provided Port Health Authorities have been established. Also see "Montreal".

MAX. SIZE: Max. size tankers handled – LOA 620 ft., max. draft 32 ft. at Bowater No. 4 Berth.

RADIO: For short range: Stephenville Marine Radio operated by DOT. WT 500, 416, and 40 kc/s. RT call letters VOJ. Receives 2182, 2558, 2134, 2582 kc/s. For long range: Via Halifax Marine Radio.

Advice of arrival: ETA messages should be sent (to cable address– "Bowship") in GMT, 72, 48, 24 and 12 hours notice recommended. All messages sent to Agents will be given local Pilots and Customs. Cash requirements and other items requiring immediate attention on arrival should be given in the 48 hours ETA.

It is also recommended that notices advise number of gangs vessel can work, also if there is cargo for discharge, quantity and holds stowed.

TUGS: See "Pilotage".

BERTHING: Oil tankers for Humbermouth only docked and sailed in daylight.

Bowater's wharves: Tankers berth port side to No. 4 berth. Max. length 620 ft., max. draft 32 ft.

Bowater's wharves located near centre of city waterfront. Consist of four berths, and are continuous. Run parallel with shore line. Total length 1,650 ft. Min. depth of water 28 ft. in No. 1 berth, elsewhere 30 ft. to 32 ft. at low tide. Fresh water and electric power available.

Bowater Older Sheds (Formerly Managed and Operated by Western Terminals Limited): 1 wharf consisting of two berths. Total length is 660 ft. Depth of water is 22 ft. Fresh water available as well as electric light and power.

Canadian National Railway wharf and shed. Steel and concrete structure. Length of wharf 600 ft. Depth alongside 35 ft.

North Star Cement wharf annexed to small Government wharf. Combined length 400 ft. Depth of water 24 ft. at Western end and 17 ft. on inner end. Partly laden tankers of T-2 class discharge at this wharf.

Imperial Oil Ltd. discharging pier depth of 30 ft. min. at low tide. Full laden tankers of the T-2 class can discharge.

Irving Oil Company Ltd. discharging pier with depth of water at Eastern end of 30 ft. and at Western end 26 ft. Tankers discharge with the forward draft restricted to 26 ft.

Gulf Oil Ltd. discharging pier has a depth at Eastern end of 28 ft. and at Western end 22 ft. T-2 tankers may discharge with restricted drafts accordingly.

Golden Eagle Refinery Co. discharge oil at North Star Cement wharf.

Department of Transport Wharf. Length of wharf is 600 ft. 6 in., joined to Canadian National Railway wharf. Steel and concrete structure. Depth of water alongside is 32 ft. to 34 ft. Wharf is equipped with three side-loader ramps tested for 25 ton capacity. Managing operators are Western Terminals Limited. Fresh water is available. General cargo is handled.

At Bowaters, vessels loading normally dock starboard side to No. 1 Berth and port side to No. 2 Berth. Oil and caustic soda tankers discharge port side to No. 4 Berth. General cargo, such as alum, is normally discharged port side to No. 3 Berth.

CRANES: Mobile crane available at Bowater – capacity 11 tons from ship's hold, 18 tons from deck.

STEVEDORES:

Working Hours:

When 4 or more loading spaces available:

0800 to 1200	– 4 gangs
1200 to 1230	– Lunch break
1230 to 1630	– 4 gangs

When less than 4 loading spaces:

0800 to 1200	– 2 gangs
1200 to 1230	– Lunch break
1230 to 1630	– 2 gangs
1630 to 2030	– 2 gangs
2030 to 2100	Meal break
2100 to 0100	– 2 gangs

Overtime: Can be worked Mondays to Fridays (day gangs) 1630 to 2100 hrs. if requested. Lunch break 1800 to 1830 hrs., but gangs are paid for 4.5 hours at time and a half rate.

Tankers: Under extenuating circumstances, tankers being discharged prior to a Statutory Holiday could be completed on a Statutory Holiday at double time and a half rates, but under no circumstances will work commence if vessel arrives on a Statutory Day.

MEDICAL: Hospital and Ambulance service available. If ships' Crew members require emergency medical attention *on board immediately on arrival,* this should be stated in message to Agents, together with ETA. Otherwise, doctor appointments can be arranged during regular office hours.

TANKERS: It is recommended by local Pilots that oil tankers for Humbermouth, dock and sail in daylight, otherwise there are no special requirements except usual advance notice should be given to Agents in order to arrange linesmen. See "Berthing".

DENSITY: Average 1015. High water, Easterly wind 1025. High water, Westerly wind 1008. Low water 1005.

FRESH WATER: Fresh water available at Bowaters berths – 50c per ton first 20 tons or part thereof and 25c per ton for each additional ton.

FUEL: Bunker "C" fuel oil 300 secs. SSF available at Bowaters No. 4 berth. 24 hours notice required. Gas oil and Marine diesel available by truck delivery. Castrol lubricants available at 72 hours notice.

GANGWAY/DECK WATCHMEN: Not required but recommended.

OPENING/CLOSING HATCHES: Opening and closing hatches is normally done by ship's crew. Rigging ship's gear is normally done by stevedores.

CUSTOMS ALLOWANCES: On arrival per crew member: 3 lbs. tobacco or 300 cigarettes or 75 cigars. Two dozen beers or 60 oz. spirits. *Additional issue* will be made *after seven days* in port. 2 lbs. tobacco or 200 cigarettes or 50 cigars. 1.5 dozen beers or 40 oz. spirits.

CARGO GEAR: If at Bowaters berths, single 8 in. wood blocks with 1 in. diameter manila rope falls should be set up at heads of all working derricks to permit tents to be rigged on both midship and yardarm derricks at each hatch.

IDENTITY CARDS: Every Crew member should be in possession of some form of identity card.

CONSULS: Nearest consuls are in St. John's approximately 450 miles.

REPAIRS: Minor repairs carried out.

REPATRIATION: All necessary crew changes and repatriation facilities available.

AIRPORTS: International Airport, 222 miles from Corner Brook, at Gander. Stephenville Airport, Air Canada and EPA, 50 miles from Corner Brook. Deer Lake Airport, EPA service available, 30 miles from Corner Brook.

TIME: NST-GMT less 3.5 hours. Newfoundland Daylight Saving Time – GMT less 2.5 hours, last Sunday in April to last Sunday in October.

HOLIDAYS: *Bowater Newfoundland Limited:*

January 1st – New Year's Day

July – Dominion Day (normally first Monday in July)

September – Labour Day (first Monday in September)

December 25th – Christmas Day. No work is performed after 1600 hrs. on Christmas Eve (December 24th), nor on New Year's Eve (December 31st). Plus an additional day as agreed with Unions.

Friday – Ordinary working day except that overtime rates are payable when stevedores have worked each of the 5 preceding days in the week.

Saturday – Ordinary working day except that overtime rates are payable when stevedores have worked either 5 or 6 of the preceding days.

Sunday – As per Union agreement. Work can be performed at time and a half rates as follows:

July and August – a maximum of 2 consecutive Sundays

Remainder of the year a maximum of 3 consecutive Sundays.

POLICE/AMBULANCE/FIRE: *Police:* Alongside Bowaters Ext. 274 Mill Guards. Local Police area code 709-634-8236.

Ambulance: Alongside Bowaters Ext. 274 Elizabeth Ambulance. City-area code 709-634-7009, 634-5611.

Fire: Alongside Bowaters 274 Mill Brigade. City-area code 709-634-4333.

Hospital: 634-4393 or 634-5101.

TELEPHONES: None available on board ships, but phones are on the wharf in nearby offices.

GENERAL: Ice coverage can be expected between January 1st and April 15th. Shipmasters should get in touch with Ice Information Office, Halifax, Nova Scotia, Telephone (Area code 902) 526-5664 or 426-5665. Telex No. 019-22625 for routing and Icebreaker assistance. 36 hours ETA in Cabot Strait is required.

SERVICES: Compass adjuster can be engaged.

SHORE LEAVE: Discretion of Master. No port regulations.

AUTHORITIES: Harbour Master and Bowaters Newfoundland Ltd.

DALHOUSIE, N.B.: 48.04 N. 66.22 W.

DOCUMENTS:

Ship's Register.
Load Line.
Safety Radio and Safety Equipment Certificates.
Stores List and Crew Declaration (E–17, Y–14), if from foreign port.
Pratique, if from a Foreign Port.
Immigration Clearance from last Canadian Port.
If from a Foreign Port, 2 copies of crew list.

For Shipping Master: Ship's Articles if British or Canadian Registry.

PILOTAGE: Telegram sent to Restigouche Pilots, Dalhousie, N.B., or to vessel's Agent. 6 hours minimum notice required except during Winter operations (January–April). Pilot vessel is a 40 ft. steel hull, black, grey superstructure, displays proper flag by day and proper lights by night. Pilots meet and board all inbound vessels 1.5 miles due East of Bon Ami Point lighthouse. Pilots prefer pilot ladder for boarding.

ANCHORAGES: Safe anchorage 1.5 miles offshore due East of harbour entrance. Pilots will board vessels for anchorage in from 6 to 12 fathoms.

RESTRICTIONS: Tide restricted if vessel exceeds 28 ft. on arrival.

MAX. SIZE: Max. length 750 ft., beam 100 ft., draft 36 ft. at the Government Wharf including oil and bulk carriers. Vessels approaching these dimensions must berth at high water, port side to. Max. draft entering harbour and berthed starboard side to is 28 ft. because of restricted turning basin.

HEALTH: See "Montreal".

RADIO: ETA through Grindstone.

TUGS: Not necessary.

BERTHING: To berth starboard side to at any berth vessel is requested to arrive 3 hours before high water.

STEVEDORES: Contact Agents.

MEDICAL: Hospital and doctors available.

TANKERS: One 12-in. line with three 8-in. connections is laid to the Government Wharf. Depth alongside 34 ft. LWOST.

DENSITY: Average density 1008.

FRESH WATER: Available at all berths from hose lines on the dock. 50 t.p.h.

FUEL: Available by truck if necessary. Advance notice required.

GANGWAY/DECK WATCHMEN: Available if requested.

OPENING/CLOSING HATCHES: As in Charter Party.

IDENTIFICATION CARDS: Not needed.

CONSULS: None.

REPATRIATION: Facilities exist providing sufficent notice given.

AIRPORT: 7 miles, 2 flights daily.

TIME: Daylight Saving during Summer months. Atlantic Standard otherwise.

HOLIDAYS: Official Holidays: New Year's Day; Christmas Day; Dominion Day; Labour Day.

POLICE: Telephone 684–2167.

TELEPHONES: Made available upon prior arrangement.

SHORE LEAVE: Allowed.

AUTHORITY: Dept. of Transport, Saint John.

DIGBY, N.S.: 44.38 N. 65.45 W. (See Plan Book)

DOCUMENTS: See "Montreal".

PILOTAGE: Usually contacted through St. John radio station by VHF. 12 hours notice required. Pilot usually meets ships at entrance to Digby. As long as adequate notice is given no waiting is experienced.

ANCHORAGE: Good Anchorage N.E. from town 15 to 25 fathoms.

MAX. SIZE: Length 400 ft. and 28 ft. depth at low water.

HEALTH: See "Montreal".

RADIO/VHF: St. John Radio call sign VAR.
TUGS: Not normally necessary, light towing available in case of necessity.
BERTHING: Transport wharf main pier with berthing length 400 ft. and 28 ft. alongside at low tide, also Transport Spur Pier 330 ft. long and 50 ft. wide, 22 ft. depth alongside at low tide (21 to 28 ft. rise and fall in tide).
FRESH WATER: Supplied by pipe-line on wharf.
FUEL: Diesel oil available only.
DEVELOPMENTS: Construction of new Dock for St. John N.B. to Digby ferry service completed.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Usually carried out by crew.
CUSTOMS ALLOWANCES: 200 cigarettes per man, per week; 40 oz. alcohol per man per week for crew.
IDENTIFICATION CARDS: Required or passport.
CONSULS: None.
REPAIRS: No major repair facilities available.
REPATRIATION: Can be arranged.
AIRPORT: Small local line based at St. John N.B. supplies service between St. John and Digby. Halifax International Airport 180 miles away.
TIME: GMT minus 4 hours.
HOLIDAYS: New Year's Day (Jan. 1st); Good Friday; Easter Monday; Victoria Day and Queen Elizabeth Day (May 19th); Canada Day (July 1st); Labour Day (Sept. 1st); Thanksgiving Day (Oct. 13th); Remembrance Day (Nov. 11th); Christmas Day (Dec. 25th).
POLICE/FIRE/AMBULANCE: Police 245–4162; Fire 245–2121; Ambulance 245–2205.
TELEPHONES: Available at cost of installation.
SHORE LEAVE: Allowed.
AUTHORITY: Vernon Everett, Harbour Master.

FRASER PORT, B.C.: 49.12 N. 122.55 W. (See Plan Book)

DOCUMENTS, ANCHORAGE, and further information: Refer to "Vancouver, B.C.".
PILOTAGE: Compulsory from Fraser River Sands Heads.
MAX. SIZE: Draft limited to 33 ft. on 12 ft. tide.
HEALTH: Pratique and quarantine at Victoria B.C.
TUGS: Available, normally join vessel on arrival.
BERTHING: (North and South side of river).

Pacific Coast Terminals Co. Ltd.: 8 berths for vessels up to 35 ft. draft. Covered storage for general cargo, pulp and mineral concentrates.

Fraser–Surrey Docks Ltd.: 5 general berths, total length 3,300 ft., 1 sawdust/woodpulp bulk cargo berth and 1 tranship berth, Depth at low water 33 ft. Water, power and telephone connections at all berths. Cargoes handled include forest products, steel, heavy lifts bulk and general cargo, as well as roll-on/roll-off cargoes and containers. Terminal well equipped with fork lifts, front-end loaders and cranes to 250 tons. Operators are Fraser Surrey Docks Ltd.

Fraser Wharves Ltd.: 1 berth, length 500 ft., width 45 ft. Berth for loading and unloading cars.

Annacias Marine Terminals.: 1 Berth, length 552 ft., width 60 ft. Situated at East end of Annacis Island for discharging of cars.

Domtar Chemicals Ltd.: 1 berth, length 610 ft., depth 27 ft. Berth connected to plant by 30 in. conveyor belt system for transfer of crude rock gypsum to the plant.

Crown Zellerbach Building Materials Ltd.: 2 berths, total length 1,300 ft., depth at LW 30 ft. Berth is upstream of the Patullo bridge.

MEDICAL: All services available.
DENSITY: Varies with location and season.
FRESH WATER: Available.
FUEL: All grades available.
DEVELOPMENTS: Future developments call for 35 ft. draft and expanded berthing facilities.
CONSULS: At Vancouver.
REPAIRS: Engine repairs only.
AIRPORT: Nearest at Vancouver.
TIME: Pacific Standard Time, GMT minus 8.
POLICE/AMBULANCE/FIRE: Police 521–7711; Ambulance 872–5151; Fire 526–4411.
SHORE LEAVE: Allowed.
AUTHORITY: Fraser River Harbour Commission, New Westminster.

FROBISHER BAY, N.W.T.: 63.44 N. 68.32 W.

DOCUMENTS: See "Montreal".
PILOTAGE: No Pilot service.
ANCHORAGES: Best-known anchorage in depths of 21 and 22 fathoms approximately 5 cables East of Monument Island.
RESTRICTIONS: Low-powered vessels generally navigate Pike Resor Channel at slack water, high or low tide.
MAX. SIZE: Tankers with dimensions 525 ft. long, breadth 58 ft., draft 30 ft. 2 in. discharge in a position approximately 800 ft. off Innuit Head. Method of mooring is to stream both anchors in anchorage area and stern lines to mooring bollards situated on Innuit Head for this purpose. General cargo ships up to 12,000 tons also moor in this position. Masters advised to be prepared for quick departure in event of storm warnings especially if winds expected from Northerly and Southerly directions.
HEALTH: Free pratique, if health certificate is in order. In the event of suspected disease or fever on board, report to Frobisher Bay Telecommunications Branch call sign VFF R/T or W/T.
RADIO: Frobisher Bay R/S VFF. Resolution Island R/S VAW.
TUGS: 2 landing craft (LCM's) each powered with two 130 h.p. diesel engines assist vessels in mooring, acting as tugs and running ship's stern lines to Innuit Head.
STEVEDORES: Special arrangements are necessary for these services.
MEDICAL: Hospital facilities available.
DENSITY: From August 1 to September 15 mean approx. 1.02477 increasing slightly as season advances.
FRESH WATER: Small quantity in emergency. Approximately 50 gallons per minute. *Note:* Due to tidal conditions considerable delay could result in delivering fresh water.
FUEL: Only supplied in emergency, Arctic diesel grade 1, viscosity quoted as minus 60.
OPENING/CLOSING HATCHES: According to agreements.
IDENTIFICATION CARDS: Required if arriving from a foreign country.
REPAIRS: Limited repairs, i.e. welding, R/T and radar.
REPATRIATION: Crew changes can be effected by air passage to or from Montreal.
AIRPORT: Distance approximately 0.5 mile from landing beach, 5 flights weekly to and from Montreal, weather permitting.
TIME: GMT minus 4 hours.
POLICE/AMBULANCE/FIRE: RCMP 5202; Ambulance 979–5231; Fire 6666.
AUTHORITY: Harbour Master.

GASPE, Quebec: 48.50 N. 64.29 W. (See Plan Book)

DOCUMENTS:
Immigration Documents:
Passenger landing cards (Tourist) 1 each passenger.
2 Crew Lists from Immigration.
2 Passenger Lists.
Customs Documents:
2 Inward Reports.
2 Outward Reports.
3 Ship Stores Lists (Form E.1).
3 Crew Declarations (Form Y.14).
National Health and Welfare:
2 QS.1 Maritime Declarations of Health.
Manifests required for cargo unloaded only.

PILOTAGE: Not compulsory but recommended. No licensed Pilots available, but men recommendable for guidance to harbour and wharf. To obtain Pilot, arrange by radio phone through marine radio station VCG at Fox River, Gaspe PQ or by CN Telegraph, on receipt of message either to Agent or Port Authority, Pilot and other arrangements can be made.
MAX. SIZE: Vessels of 650 ft. and over have both docked and anchored. Tide has no effect as it is very sheltered. Government wharf depth 35 ft. LW.
HEALTH: On arrival in Canadian waters Master applies for Radio Pratique by radio to quarantine officer at Quebec City. Master flies yellow flag on arrival and until medical officer decides it can be lowered or otherwise according to regulations. See also "Montreal".
RADIO: VCG Marine Station Fox River, Gaspe PQ.
TUGS: Not necessary, no tugs available unless called for in emergency. Line boats available for docking, by arrangement.
BRIDGES: New bridge under construction – no opening span.
BERTHING: *M.O.T. (Sandy Beach) wharf*, berthing length 600 ft., depth alongside at low water 33 to 35 ft. outer face and about 26 ft. inner side; railroad tracks on wharf, oil tanks, electric light and water.
STEVEDORES: Good stevedoring available at all times and hours.
MEDICAL: Hospital and ambulance service.
TANKERS: Oil lines on Department of Transport Government Wharf owned and used by Gulf Oil Canada, Irving Oil, Shell Canada Limited and Imperial Oil. These lines are privately owned.
FRESH WATER: Available, arranged through ship's Agent.
FUEL: Light and medium diesel available at all times. If bunker fuel required on request, brought in by tanker car.
GANGWAY/DECK WATCHMEN: Recommended watchmen necessary, may be obtained.
OPENING/CLOSING HATCHES: Done by ship's crew.
CUSTOMS ALLOWANCE: On arrival officers and crew permitted one bottle and 200 cigarettes and one pound of tobacco for period of one week, further allowances of tobacco given after one week, as well as spirits for senior officers.
IDENTIFICATION CARDS: Not required.
CONSULS: None.
REPAIRS: Only minor repairs.
REPATRIATION: May be arranged by Agent subject to Immigration control.
AIRPORT: Situated about 7 miles from the dock. Twice daily service to Quebec, except Saturday and Sunday, one flight only. Connections to all parts from Quebec. Charter passengers and freight flights also available.
TIME: GMT minus 5 hours all year.
HOLIDAYS: Saturday, New Year (January 1st); Good Friday; Victoria Day (May 19th); Confederation Day (July 1st); Labour Day (September 1st); Thanksgiving Day (about October 13th);

Remembrance Day (November 11th); Christmas Day (December 25th). There are a few other R.C. Church days on which some men are not obtainable. On most of these holidays stevedores and men are available.

POLICE/AMBULANCE/FIRE: Police area 418 call 368–3337. Local RCMP area 418 call 368–2543. Ambulance Area 418 call 368–2835.

TELEPHONES: Possible arrangements may be made with local telephone company for installations to vessel.

GENERAL: Radar repairman available if matter not too serious.

SHORE LEAVE: Crew allowed ashore.

AUTHORITY: Customs and Immigration Officer, and Harbour Master and Government Wharfinger.

GOOSE BAY, Labrador: 53.22 N. 60.22 W.

DOCUMENTS, HEALTH: See "Montreal".

PILOTAGE: 2 Pilots available; 24 hours notice of arrival required. Contact Pilot on radio-telephone 2182 kc/s., calling "Victor Gulf Whiskey".

RESTRICTIONS: Navigation season early June to end November depending on pack ice movements. Approach – Sandy Point Channel at entrance to Goose Bay and 15 miles from the dock has a width of 300 ft. Harbour Master advises draft of 31 ft. HWF. Groves Point Channel at entrance to Terrington Basin and 1.5 miles from Main Dock has depth of 32 ft. HWF and width of 300 ft.

TUGS: There are no tugs. 3 landing craft available to assist.

BERTHING: Main wharf length 810 ft. depth alongside increased to 30 ft.

Government Dock, 190 ft. long, depth 19 ft. 6 in. LWOST.

DENSITY: 1000, fresh water.

FUEL: Diesel oil only, supplied by tank truck and pipe-line.

FRESH WATER: Available alongside berths.

REPAIRS: Only minor repairs may be effected in emergency.

AIRPORT: 1.5 miles distant.

HOLIDAYS: New Year's Day; Good Friday; July 1st; Labour Day; November 11th; Christmas Day; Boxing Day.

AUTHORITY: District Manager, Canadian Coast Guard, Goose Bay.

HALIFAX, N.S.: 44.39 N. 63.34 W. (See Plan Book)

DOCUMENTS:

Port doctor: Form QS1; Crew Vaccination Certificates, Deratisation Certificate.

Customs: Customs clearance or certificate from last port; Cargo List (if no cargo, words "In Ballast" entered); Bonded Stores List (Form E.1); Crew Declaration for each crew member (Form Y14). Ship's Register; Safety Radio, Load Line and Safety Equipment Certificates.

Immigration: Crew List (Form 200) in duplicate in English; all crew Passports (returned prior to sailing).

PILOTAGE: Compulsory. Essential send arrival notice by radio to avoid delay in waiting Pilot. 12-hour notice of ETA required and confirmed or corrected 4 hours before arrival. All times must be GMT. Radio messages should be addressed Marine Aid Centre, Chebucto Head. All pilotage messages subject to full tolls.

When possible, Pilots will board in vicinity of Inner Automatic Light and Whistle Buoy situated about 2 miles N.E. of Chebucto Head. In heavy weather not always possible for pilot vessel to take up station at above position, but will proceed as far seaward as feasible to embark or disembark Pilot.

In normal weather pilot vessel shall, in daytime, fly Pilot flag, and at night will show lights required by international regulations. In abnormal weather – fog, mist, snow, heavy rainstorms – when on station on pilotage duty, in addition to regular signals, will blow four long blasts at regular intervals. Vessel requiring Pilot should blow four short blasts on whistle at intervals until pilot boat sighted. Pilot boats equipped with radar and stand-by on radio telephone operating on frequency of 156.8 m/cs or Channel 16 under international VHF designations.

ETA: For provisional clearance to enter the Halifax Marine Traffic Regulating zone, vessels should supply the following information to "Halifax Traffic":

1. Position.
2. ETA Zone Limit (Zone boundary is approximately 16 miles radius from Chebucto Head).
3. Destination and last port.
4. Draft.
5. Description and weight of pollutants or any dirty cargo carried.
6. Deficiencies in ship's navigational equipment, engine's steering gear or anchors.
7. Any leakage of pollutants or any damage which may result in pollution.
8. Pilots must be advised ETA 12 and 3 hours prior arrival at the Pilots boarding station, using GMT, to "Pilots Halifax".

For final clearance to enter the Halifax Marine Traffic Regulation Zone:

1. Report to "Halifax Traffic" on VHF Channel 14 or 2182 kHz, when approaching the zone boundary.
2. Report to "Halifax Traffic" when approaching zone boundaries approximately 8 and 4 miles radius from Chebucto Head.

Vessels leaving Halifax are to report to "Halifax Traffic" when approaching zone boundaries.

ANCHORAGE: Vessels anchor in harbour in areas designated by National Harbours Board.

RESTRICTIONS: Controlling depth in channels of approach 60 ft. in main harbour as far as the Narrows. Ice free all year. Ample turning room for the longest vessel.

MAX. SIZE: Length and breadth unlimited. Can berth ships up to 60 ft. draft. Channel depth 60 ft. Tide range 6 to 7 ft. 110,000 ton tankers with drafts 50 ft. enter harbour regularly.

HEALTH: Quarantine – every vessel coming from port outside Canada shall be inspected by Quarantine Officer at a place specified by him. (Quarantine Station in anchorage No. 1). Where sufficient information can be given by radio, Radio Pratique may be given between 0900 hrs. and 1700 hrs. local time (address "Quarantine Halifax") and message should include (i) name and nationality of vessel, (ii) ports of call during voyage, (iii) nature of cargo, (iv) number of crew and passengers, (v) statement of health, (vi) name of Agent, (vii) ETA pilot station in GMT. A coastwise vessel, free from disease and arriving from a disease-free coastwise port, may be exempted quarantine inspection.

TUGS: Join vessel inside harbour at quarantine anchorage. Tugs towing use vessel's lines. Tugs made fast alongside vessel for docking or undocking use their own lines at no extra charge.

RADIO: Halifax Marine Radio Station, Ketch Harbour. Radio-telephone and other services. Masters may contact Halifax Marine Radio on 500 or 2,182 kHz, VHF on 156.8, working Channel 26 (161.9 and 157.3 mHz).

RADAR: Marine Traffic Regulating Center at Chebucto Head. Working frequencies Sector One 156.7 mHz (Channel 14) Sector Two 156.6 mHz (Channel 12). Call sign "Halifax Traffic".

BERTHING:

Ocean Terminals:

Berth	*Length (m.)*	*Depth at LW (m.)*	*Remarks*
20	224	13.7	
21	178	13.7	
22	209	13.7	
23	213	10.7	
24	137	9.1	
25	168	12.5	
26	213	13.7	Grain – Discharge
27	207	13.7	
28	174	13.7	Grain – Loading
29	122	9.1	Fish Pier – Leased
30 31	244	10.6	
32	88	11.6	
33	190	12.8	
34	190	8.2	
35	103	9.1	
36	190	10.7	
37	190	13.7	
38	91	13.7	
39	190	13.7	
41	259	15.2	Container Terminal. 3×40.8 tonne gantry cranes. Ro-Ro ramp width 24.4 m. at Berth No. 41.
42	259	12.8	
Dartmouth			
Pier W.	152	25–30	Lay-up berth only.
E.	152	25–30	
Richmond Terminals:			
9	213	9.1	Leased to Volvo, Texaco Canada and Canadian Petrofina Ltd.
9a	240	9.1	
9b	213	9.1	
9c	140	9.1	Canadian Petrofina Ltd.

CARGO FACILITIES: (West Side of Harbour) 13 Shedded Berths. Each shed 50,000 sq. ft. or more 9 with dockside rail track.

6 Open Area Berths

1 – 70,000 sq. ft. storage area. Dockside rail track
1 – 60,000 sq. ft. storage area. Ro/Ro ramp
2 – 48,000 sq. ft. storage area. Dockside rail track
1 – 58,000 sq. ft. storage area. Dockside rail track
1 – 40,000 sq. ft. storage area. Dockside rail track

AUTOPORT FACILITY: (East Side of Harbour) 2 berth facility with ro/ro capability. 80 acres for vehicle storage with pre-service available for import vehicles.

BRIDGES: There are two: Angus L. MacDonald bridge (Halifax-Dartmouth) min. vertical clearance at high water 158 ft.; A. Murray MacKay Bridge (narrows) min. vertical clearance at high water 157.7 ft.

TANKERS: 110,000 ton tankers, 50 ft. draft, use port regularly. Terminals – nine berths operated by four oil companies.

Imperial Oil, South Dartmouth, three piers, vessels up to 282 m.; max. draft 15.2 m., bunkering vessel also provides barge service.

Irving Oil Co. Ltd.: South Dartmouth, three berths, ocean vessels any length, max. draft 11.6 m.; located at Woodside.

Texaco Canada Ltd.: Eastern Passage, two berths (one berth any length vessel) draft up to 10.1 m., barge service provided in harbour.

Gulf Oil Canada Ltd.: Bedford Basin; 109.8 m. wharf (no restriction vessel length) depth 9.75 m.; located Burnside, Halifax – Dartmouth Marine Terminal.

BULK HANDLING FACILITIES: Two-berth container ship-rail interface at Pier "C". Served by three 40.8-tonne container gantry cranes, two railcar loading transtainers, 30 tons each, 22 straddle carriers, 30 tons each. Total quay length 1,762 ft., minimum depth, North end 50 ft., South end 40 ft.; one ro-ro berth. New container facilities are under active consideration.

Grain Handling Facilities: Storage capacity over 5,000,000 bushels. Max. capacity
Berth 28 72,000 bu/hr. (loading)
Berth 26 34,000 bu/hr. (unloading)

MEDICAL: Sick Mariners' Service may be obtained for venereal disease only at the Federal Building, Suite 620, Bedford Row, Monday through Friday, Tel. 426–3998. Doctor always available either by telephone or telephone answering service. Information for emergency treatment outside these hours may be obtained from ship's Agent. Emergency hospitalisation can be obtained only at Camp Hill Hospital.

STEVEDORES: Available from several private companies.

DENSITY: Salt water all tides.

FRESH WATER: Dock side only. No water barges. 50 t.p.h. per hose.

FUEL: See "Tankers".

GANGWAY/DECK WATCHMEN: Can be provided.

OPENING/CLOSING HATCHES: Patent mechanical hatches by ship's crew. Wood and canvas hatch covers by stevedores.

CUSTOMS ALLOWANCES: Tobacco: 1 lb. per man per week; 200 cigarettes per man per week. Wine/spirit allowance: 40 oz. bottle per man per week.

CARGO GEAR: All ships liable to inspection by government inspectors. Gear certificates to be produced, if required. Heavy-lift equipment: 59 pieces ranging in single lift capacity to 300 short tons. Normally available on a few hours notice, including floating cranes.

CONSULS: The following countries are represented in Halifax:

Austria
Belgium
Britain
Brazil
Denmark
Finland
Japan
Germany
Iceland
Italy
Netherlands
Norway
Peru
Portugal
Spain
Sweden
United States of America

REPAIRS: All types of repairs possible.

DRY DOCKS: Floating dock 182.9 m. by 30.5 m. by 9.45 m. deep; Lifting capacity 22,680 tons. Graving dock – 172.9 m. long, 24.4 m. wide at keel blocks; clearance at top is 31.2 m.; max. draft over the keel blocks is 7.9 m., capacity 13,610 tons. Two marine railway slips at Dartmouth capable of hauling vessels from 36 to 2,720 tons displacement. Complete machine shop and other repair facilities as well as Salvage equipment available.

AIRPORT: Halifax International. Regular services to Canada, USA and Europe.

TIME: Standard Time GMT minus 4 hours. Daylight Saving Time from last week-end in April to last week-end in October, clocks advanced 1 hour.

HOLIDAYS: New Year's Day (January 1st); Good Friday; Queen's Birthday (May 20th); Dominion Day (July 1st); Labour Day (September 2nd); Thanksgiving Day (October 14th); Remembrance Day (November 11th); Christmas Day (December 25th). Cargo work can be arranged on all holidays except Labour Day.

POLICE/AMBULANCE/FIRE: Police 4105; Harbour Police (NHB) 426–3629; Ambulance 429–5151; Fire 4103.

TELEPHONES: Service available at all berths.

GENERAL: Extensive rail and road services plus extensive transit sheds, cold storage with 1,719,000 cu. ft. storage space.

SERVICES: All services available including compass adjusting, tank cleaning, etc.

SHORE LEAVE: Crew allowed ashore.

DEVELOPMENTS: New container facility now under construction at Fairview Cove in Bedford Basin.
1 Berth – Length 335.28 m., Depth of water – 15.24 m. with Ro/Ro ramp for end loading of vessel.
2 gantry cranes – 40 tonnes.
Consolidation shed and office building.
Land area – 21.17 Hectares (Additional space for expansion).
Completion expected – late 1980.

AUTHORITY: National Harbour Board.

HAMILTON, Ontario: 43.14 N. 79.41 W.

(See Plan Book)

For important General Information refer to St. Lawrence Seaway.

DOCUMENTS:
Inward manifest 3 days prior to arrival of vessel.
1 Steamship company release covering inward shipment.
1 Loading list, 24 hours prior to vessel loading.
1 Customs report outwards (A.7).
3 Vessel's outward manifest within 3 days after departure of vessel.

PILOTAGE: Pilotage to be arranged 24 hrs. in advance. Pilot normally boards outside at Fairway Buoy. Contact VHF 16–156.8 mc/s.

MAX. SIZE: 730 ft. LOA. Max. draft 26 ft.

HEALTH: First port of entry. See "Montreal".

RADIO: VBG Toronto.

Vessels Inbound: Call Burlington Bridge on radio telephone (VHF or AM) for clearance. Call Harbour Master's office for information about docking orders (VHF or AM).

Vessels Outbound: Call Burlington Bridge for clearance. Call Harbour Master's office to advise next port of call.

General: Harbour Master's office keeps radio watch on AM and FM working channels. Tug or linesmen may be ordered through the Harbour Master's office.

TUGS: Join inside harbour entrance – ship's lines used.

BERTHING: Arrangements made with Harbour Master.

Berthing Capacities: The Port of Hamilton provides berthing facilities for all vessels capable of navigating the St. Lawrence Seaway which can handle maximum size vessels of 730 ft. in length × 75 ft. in beam with a draft of 26 ft. 6 ins.

The Hamilton Harbour Commissioners provide 19,000 ft. of berthing and in addition 10,050 ft. of berthing is available for private docks i.e. – International Harvester, The Steel Company of Canada, Dominion Foundries & Steel.

Covered Storage Space: Total 638,000 sq.ft. from which the Hamilton Harbour Commissioners utilize 430,000 sq.ft. and leases to private operators:

108,000 sq.ft. to Canada Steamship Lines Limited	Pier No. 24
100,000 sq.ft. to Seaway Terminals	Pier No. 14

Outside Storage Space: Total – 2,980,200 sq.ft. Operated by The Hamilton Harbour Commissioners:

Centennial Terminal	400,000 sq.ft.
Wellington Street Terminal	200,000 sq.ft.
Pier 23	140,000 sq.ft.

Leased to Private Operators:

Pier 11	250,000 sq.ft.
Pier 12	600,000 sq.ft.
Pier 13	240,000 sq.ft.
Pier 14	1,000,200 sq.ft.
Pier 15	150,000 sq.ft.

BRIDGES: Lift bridge at harbour entrance can be raised any time.

STEVEDORES: Must be ordered prior to 1545 hrs. on previous day.

MEDICAL: Hospital services available and doctors can be arranged.

FRESH WATER: Available.

FUEL: All types available.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Performed by stevedores.

CUSTOMS ALLOWANCES: See "Montreal".

IDENTIFICATION CARDS: Not required.

CONSULS: Consuls located in Toronto.

REPAIRS: Available.

AIRPORT: Hamilton Civic Airport (10 miles south, and Toronto International Airport 30 miles east).

TIME: GMT minus 5 hours.

HOLIDAYS: Normal Canadian statutory holidays apply and labour can be arranged at extra cost. See "Montreal" for details.

POLICE/AMBULANCE/FIRE: Harbour Police 529-3423.

TELEPHONES: Can be arranged on board.

SHORE LEAVE: Crew allowed ashore.

AUTHORITY: The Hamilton Harbour Commissioners.

HANTSPORT, N.S.: 45.04 N. 64.10 W.

DOCUMENTS: See "Montreal".

PILOTAGE: Non-compulsory, but advisable. Rates by agreement.

MAX. SIZE: Tidal port and no shipping arrives or departs at low water. Draft of largest vessel that entered port was 24 ft. A draft of 25 ft. can be taken in and out.

HEALTH: Customs officer acts as Quarantine officer.

RADIO: Ship-to-shore communications; through St. John N.B. or Yarmouth N.S.

BERTHING: Berthing length 400 ft., no water at low tide, ships lie aground on mud alongside. There are railroad tracks on wharf, main and electric lights laid on.

FRESH WATER: From pipe-line on Government wharf.

FUEL: Oil by truck from Imperial Oil Ltd.

REPAIRS: Hull repairs can be made at low water with vessel high and dry.

SERVICES: Supplies: ship's stores can be secured in port.

AUTHORITY: E. L. Dillman, Harbour Master.

HARBOUR GRACE, Newfoundland: 47.43 N. 53.08 W.

DOCUMENTS:
Crew Lists.
Names of passengers.
Clearance from Last Port of call.
Deratting Certificate.
Inoculation List of all crew members and passengers.
Manifest of Cargo.
Copy Bills of Lading.
List of Bonded Goods.

PILOTAGE: Not compulsory, if required cable Agent.

ANCHORAGES: Pilot will instruct captain.

MAX. SIZE: Max. length 650 ft., max. draft 24 ft. low tide.

HEALTH: See "Montreal".

RADIO: Route cables and telephone calls through St. John's Newfoundland Radio.

TUGS: Not available.

BERTHING: Nothing specific, Pilot will have instructions; Agent should be given 24 hours arrival notice.

STEVEDORES: Available. 24 hours notice required.

MEDICAL: Port doctors available; hospital facilities; advance notice would be helpful in providing ambulance services if needed; vaccination/smallpox required for European ships.

TANKERS: Marine storage terminals for oil are served by Canadian tankers.
FRESH WATER: Available, pipe-line delivery at piers, rate of delivery as required.
FUEL: Diesel, gas oil, marine bunkering facilities in piers, available at any time, no notice required.
GANGWAY/DECK WATCHMEN: Not necessary, available if required.
OPENING/CLOSING HATCHES: By crew.
CUSTOMS ALLOWANCES: See "Montreal".
IDENTIFICATION CARDS: Not required.
CONSULS: Norway; Denmark; Spain; Portugal; France.
REPAIRS: Deck and engine repairs available.
AIRPORT: 1 hr. 15 min. drive, service by regular airlines making connection to all points in the world.
TIME: GMT minus 3.5 hours. Clocks advance 1 hour last Saturday of April each year and are put back 1 hour last Saturday October each year.
HOLIDAYS: New Year's Day; Good Friday; July 1st; November 11th; December 25th. Cargoes could be worked on these days with exception of Good Friday and Christmas Day.
POLICE/AMBULANCE/FIRE: One telephone number for all services 709-596-5014.
TELEPHONES: Available at pier.
SERVICES: Compass adjusting available.
SHORE LEAVE: All crew members allowed ashore.
AGENT: Ocean Harvesters Ltd., Harbour Grace, AOA 2MO. Tel. 709-596-5111, 709-596-5112, 709-726-4840. Telex 016-3111. Cable address: Moorfish, Hr. Grace.

KINGSTON, Ontario: 44.12 N. 76.30 W.

For important General Information refer to St. Lawrence Seaway.
DOCUMENTS: See "Montreal".
PILOTAGE: Contact Pilotage Officer, in Cornwall, telephone 613-932-8740, USA Pilot Station, Cape Vincent 315-654-2900.
ANCHORAGE: Good anchorage off Penitentiary.
RESTRICTIONS: Channel Depths – Controlling depth at low lake levels 22 ft. until wharves in harbour approached. In upper harbour, controlling depth 17.5 ft. Depths vary from month to month. Navigating Season April 15th – December 15th.
HEALTH: First port of entry. Quarantine at Quebec City for incoming ships from foreign ports.
TUGS: Available. Necessary for handling ships in rough weather at Elevator and other docks.
BERTHING: Docks extend West from North of bridge (La Salle Causeway) to Little Catariqui Bay – some 4 miles. Transport Canada 455 ft., depth alongside 17 ft. Portsmouth Olympic Harbour – Environment Canada, under construction. Also smaller docks for coastal vessels and private docks, including Canada Steamship Lines Elevator dock 700 ft. long on East side 25 ft. alongside, and 600 ft. on West side depth 22 ft. La Salle Causeway 1,000 ft., 14–16 ft. alongside used for berthing in Winter.
BULK HANDLING FACILITIES: *Canada Steamship Lines Elevator Dock:* Large Upper Lake vessels are unloaded on East side by two travelling marine towers; canal-size vessels are loaded on the West side, 6 loading spouts. The elevator capacity is 2,500,000 bushels, marine towers 35,000 bushels per hour. Canadian National Railways tracks run to the elevator and cars can be loaded with grain. This dock is also open to general cargo.
MEDICAL: Hospitals, Kingston General and Hotel Dieu.
STEVEDORES: From Toronto.
FUEL: Bunker coal – normal stock 2,000 tons from lighters at wharf. Bunker "C" and diesel oil also available.
FIRE PRECAUTIONS: No unusual precautions.
CUSTOMS ALLOWANCES: See "Montreal".
REPAIRS: Most repairs possible.
DRY DOCK: Will take ships of length 240 ft., beam 44 ft. Depth on sill 14.3 ft.
TIME: Eastern Standard Time GMT minus 5 hours. Daylight Saving Time from last week-end in April to last week-end in October, clocks advanced 1 hour.
HOLIDAYS: See "Montreal". Port officials always available.
TELEPHONES: Ship-to-shore phone communications through Kingston (VBH).
AUTHORITY: Harbour Master.

KITIMAT, B.C.: 53.59 N. 128.46 W.

DOCUMENTS and General Information: Refer to "Vancouver".
PILOTAGE: Compulsory. Pilot boards at Cape Beal, West Coast, Vancouver Island, or Triple Island, off Prince Rupert. Pilotage Authority require 48 hours notice to allow Pilot to meet vessel at Triple Island or Cape Beal.
ANCHORAGE: No vessel shall anchor in the fairway or dredged Channel approaching the wharf or otherwise in a position to interfere with or obstruct the docking or undocking of any other vessel. Pilot will instruct Master. Usual anchorage South of Eurocan Terminal, East side of Kitimat Arm.
RESTRICTIONS: Approach to the port from the South is via Laredo Sound, Laredo Channel, Campania Sound, Whale or Squally Channels and thence via Douglas Channel. From the North via Brown Passage, Arthur Passage, Grenville Channel, Douglas Channel. The route from the South is approximately 120 miles, from the open sea and from the North approximately 130 miles. Entrance channel to Terminal Wharf No. 1 (red and black buoys with flashing light) is 2,400 ft. long, dredged to a depth of 35 ft. at low water, width varies from 800 ft. at entrance to 600 ft. In addition, a turning basin has been dredged to 35 ft. at low water on the side of the channel opposite wharf, providing a turning basin 650 ft. in width. The channel has mooring dolphins on West side, 865 ft. South of wharf No. 1 to accommodate vessels up to 16,000 d.w.t. while awaiting berth.

Vessels may enter or depart any time of day or night.
MAX. SIZE: LOA, 680 ft. beam 90 ft., draft 36 ft. Mean tide range 13.8 ft. Depth alongside at zero tide 35 ft.
HEALTH: Vessels proceeding direct to Kitimat from foreign ports must apply for permission to proceed by radio to William Head Quarantine Station.
RADIO: Prince Rupert Radio VAJ 500 2182 1630.
TUGS: Tug services available.
ETA: Notice of ETA must be given to Alcan Eurocan at Kitimat at least 24 and 12 hours before arrival. Alcan Eurocan may then assign a berth to the vessel but shall not be liable for any delay in providing berth or for failure to provide a berth. Vessels carrying bulk cargoes for discharge are instructed to request Alcan via radio or wireless telegraph through shore stations as to which hatches are to be opened on arrival alongside unloading berth to permit immediate entry of unloading devices.
BERTHING: Alcan Terminal Wharf No. 1 (concrete caisson construction) is 750 ft. long and has two pneumatic unloading towers discharging to a belt conveyor and a Kangaroo Crane for either bulk and general cargo duties. The wharf is connected by rail direct to Aluminum Co. of Canada smelter yard and to the Terrace-Kitimat spurline of CNR.

Wharf No. 2 a timber-pile wharf is no longer operational. C.P. Northland operates a twice-weekly Ro/Ro barge service for containers and palletised cargo to and from Vancouver from the same site. The channel has mooring dolphins on the West side, 865 ft. South of Wharf No. 1, to accommodate vessels up to 16,000 tons, while awaiting berth.

Eurocan Terminal is located to the East of Alcan's Terminal Wharf No. 1 and is 450 ft. long with mooring dolphins at South end. To the North of the terminal is located a hydraulic barge loading ramp.

No container, liquid chemicals or LPG carrier facilities available.
STEVEDORES: ETA sent by cable 24 and 12 hours before arrival.
MEDICAL: Kitimat General Hospital – complete medical service provided.
FRESH WATER: Available at Alcan's Terminal Wharf No. 1.
FUEL: Only diesel oil available.
GANGWAY/DECK WATCHMAN: Not necessary.
OPENING/CLOSING HATCHES: Normally done by crew on bulk discharge. On general cargo, stevedores open and close hatches.
CUSTOMS ALLOWANCE: Tobacco: 200 cigarettes or 0.5 lb. tobacco. Liquor: 40 oz. per man, additional issue after 7 days.
CONSULS: Available at Vancouver, B.C.
REPAIRS: Minor repairs only; nearest shipyard facilities Esquimalt or Vancouver.
REPATRIATION: Facilities convenient for crew changes.
AIRPORT: Two flights daily from Terrace to Vancouver International Airport. Limousine service from Kitimat to Terrace, distance 40 miles.
TIME: GMT minus 8 hours. Daylight saving time from last Saturday in April to last Saturday in October.
HOLIDAYS: New Year's Day, Good Friday, Victoria Day, Dominion Day, Labour Day, Thanksgiving Day, Christmas Day, and Boxing Day.
POLICE/AMBULANCE/FIRE: Police 632-7111; Ambulance/Fire 632-2345.
TELEPHONE: Telephone available at dock offices.
SHORE LEAVE: Permitted.
AUTHORITY: Department of Transport.

LAKEHEAD HARBOUR, Ontario (formerly Port Arthur and Fort William): 48.27 N. 89.13 W.

For important General Information refer to "St. Lawrence Seaway".
DOCUMENTS: As inland Port all documentation carried out by authorities in Montreal, prior arriving. Only when vessels have called at United States Port after departing Montreal, and prior arriving at Canadian Lakehead, will any changes in documentation be necessary; which will consist of a United States Customs clearance. Certificates to be available on board:

- Immigration papers.
- One copy QS 2 (Health Certificate).
- Three copies of Ships' Stores.
- Crew Declaration.
- Customs Clearance.

All of the above will have been stamped in Montreal.
PILOTAGE: Pilots are obtained by Agent at Master's request, at which time the location of boarding the ship will be stipulated. Ship's Masters are able to contact Agent by ship-shore duplex through VBA Marine Radio, Thunder Bay.
ANCHORAGE: Anchorage areas defined by Lakehead Harbour Commission but due to large area and number of entrances to Harbour, Masters are permitted considerable latitude in making own decisions. Usual areas are approximately 1 mile outside of Harbour breakwall, free of shipping lanes. However, Masters should be guided by the advice of Lakehead Control (radio), VDX 30.

HEALTH: Pratique granted at Montreal.
RADIO: Two radio stations; VBA Thunder Bay, is Department of Transport station offering duplex services; VDX 30, Lakehead Control, offers special services such as assistance in obtaining tugs, relaying special messages for police, radar or radio services, etc.

VBA and VDX 30 both operate 24 hours per day during shipping season on following frequencies:

VBA (AM) Channels 51, 52, 57, 58, 59 and 81
(FM) Channels 12, 26, and 28
VDX 30
(FM) Channels 12, 16, 18A, and 14

TUGS: Arranged mutually by ship Masters and Agents on arrival in port. Ship lines used. Four tugs available.
BERTHING: *North Section* is protected by a breakwall. Refer to Canadian Hydrographic Chart No. 2314 for water depths.

The Keefer Terminal is the principal General Cargo berth available at the Canadian Lakehead. The ocean vessel shed is 400 ft. long, has a dock 650 ft. long with a maximum apron width of 65 ft. All types of import and export general cargo can be handled at this Terminal. Rental mobile cranes are available for handling lifts up to 12 tons.

The CNR has an ore dock with a berthing length of 1,200 ft. It can accommodate four vessels at one time with 200 loading chutes available. The vertical height from water level to spout is 45 ft.

South Section is comprised of the Kaministiquia River, Mission River. In general terms, for most vessels two tugs are required for safe river navigation.

There is one open storage Bulk of General Cargo berth, Valley Camp Coal Dock on the Mission River. This dock has two overhead gantry cranes with lift capacity of one, 12–14 tons and the other 22 tons. The berth is 1,600 ft. long. This dock has recently been extended with modern belt loading facilities, for handling iron ore and similar materials in bulk.

MEDICAL: All facilities available and may be arranged through Agent or Lakehead Harbour Police by contacting VDX 30 Lakehead Control.
DENSITY: Fresh water port. No tide.
FRESH WATER: Available.
FUEL: Light diesel available by tank truck. Bunker "C" only in emergencies.
GANGWAY/DECK WATCHMEN: May be arranged through Agent.
OPENING/CLOSING HATCHES: Normally done by crew.
CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes or 50 cigars every seven days. Spirit/Wine: Officers: One bottle liquor each seven days. Crew: Beer only, at Captain's discretion.
CARGO GEAR: Normal safety certificate only required. No special port regulations.
CONSULS: Following countries are represented at Lakehead:
Denmark, Finland, Italy, Netherlands and Norway.
REPAIRS: Full repairs available. Includes mobile equipment by both land and water conveyances.
DRY DOCKS: One available, length 747 ft. by 98 ft. width and can accommodate largest vessel operating on Great Lakes.
AIRPORT: Served by regular airlines with connections to any destination.
TIME: Eastern Standard Time GMT minus 5 hours. Daylight saving time from last week-end in April to last week-end October, clocks advanced 1 hour.
HOLIDAYS: During shipping season from April to mid-December on which stevedores do not work: May 24, July 1, September 1, and Thanksgiving Day (October). Work can be arranged at overtime rates.
POLICE/AMBULANCE/FIRE: Lakehead Harbour Police 344–3594, or by Marine Radio VDX 30.
Thunder Bay City Police 6236471.
Fire and Ambulance contacted most easily through VDX 30 radio.
TELEPHONES: Telephones at Keefer Terminal only.
GENERAL: All vessels entering, moving in, or departing Lakehead Harbour required to contact VDX 30 Lakehead Control prior making such move. Initial contact must be made before entry from area designated as "Welcome Islands" giving particulars of destination within Harbour and routes to be traversed.
AUTHORITY: Lakehead Harbour Commission.

MONTREAL, Quebec: 45.30 N. 73.33 W.

(See Plan Book)

DOCUMENTS:

2 Crew Lists.
2 Passenger Lists.
3 sets Customs Documents.
3 sets Health Documents.
6 sets Manifests.
6 sets Bills of Lading.
3 sets Ship's Papers.

PILOTAGE: Compulsory. Pilots board inbound vessels at Anse-aux-Basques (near Les Escoumains) to bring ships as far as port of Quebec where Pilots are exchanged for the trip to Trois-Rivieres. Pilots are again exchanged at Trois-Rivieres before ships may proceed to Montreal.

For further information refer to "Quebec".

ICE ADVISORY SERVICE: Ships inbound from seaward between 15th December and 15th April should advise the Ice Information Officer, Sydney, N.S., 36 hours prior to entering Cabot Strait stating their position, destination, whether loaded or in ballast. This procedure will facilitate the passing of ice information to the ship as necessary.

On request, ice information is also available from Marine Radio Stations at Halifax, Camperdown, Seven Islands, Twillingate and Grindstone. The Canadian Broadcasting Corporation maritime network also broadcasts ice information daily during the Winter navigation season. Supplementary ice information may also be obtained from Canadian Marine Service ice breakers.

During the ice season, radio broadcasts of ice information are made twice daily from Marine Radio Stations as follows:

	Call	*frequencies*
Cape Race, Nfld.	VCE	420kc/s CW
		2582kc/s RT
Fox River, Que.	VCG	434kc/s CW
		2582kc/s RT
Mont-Joli, Que.	VCF	446kc/s CW
		2582kc/s RT
North Sydney, N.S.	VCO	489kc/s CW
		2582kc/s RT
Halifax	CFH	115.3kc/s CW
		6949.5kc/s
		8662kc/s
		12984kc/s
		17218.4kc/s

ANCHORAGE: Available at Longue Pointe abreast of the Island of Montreal close to upper harbour. Also at Lanoraie, approx. 3 miles above Sorel harbour limits, and at Pointe-aux-Trembles anchorage below berth 110. Also opposite Canadian Vickers. Boatmen services are available to vessels at anchor.

Anchorages will be allocated by the Harbour Master (Montreal), through the Marine Traffic Control Centre, Montreal.
MAX. SIZE: Entry only restricted by draft. Main channel depth is 35 ft. Channel 550 ft. wide at narrowest point.
HEALTH: Except in case of coastwise vessels free of disease and arriving in Canada from ports or areas that are not infected, every vessel coming from a port outside Canada is inspected by the quarantine officer, and shall not make customs entry until it has received pratique.

"Coastwise Vessel" means a vessel operating exclusively between Canada and the island of St. Pierre and Miquelon or between Canada and the United States, including Alaska. A "coastwise vessel" loses coastwise status and is subject to quarantine inspection on its next arrival at a Canadian port when at any time it touches a foreign port other than those mentioned above.

Where sufficient quarantine information can be given by wireless, radio pratique may be obtained between the hours of 0900 and 1700 the day preceding arrival:

(*a*) From "Quarantine Halifax" by vessels bound for Halifax, Nova Scotia.
(*b*) From "Quarantine Saint John" by vessels bound for Saint John, New Brunswick.
(*c*) From "Quarantine Quebec" by vessels approaching Canadian ports via the Saint Lawrence River.

For the purposes of radio pratique vessels are required to give the following information:

(*a*) Name and nationality of vessel.
(*b*) Ports called at during voyage.
(*c*) Date and place of last fumigation or derating exemption certificate.
(*d*) Nature of cargo.
(*e*) Number of crew.
(*f*) Number of passengers.
(*g*) Port of destination and name of Agent.
(*h*) Number of persons without valid vaccination certificates.
(*i*) Condition of health of all on board with details of any sickness or death which has occurred during the voyage.

Valid Smallpox vaccination certificates required.

To facilitate the quarantine clearance of vessels entering the St. Lawrence Seaway, the Montreal quarantine facilities have been augmented by opening a new office in Montreal East near the entrance to the Seaway. Vessels proceeding directly into the Seaway may now receive quarantine inspection and clearance while at anchor awaiting entrance to the Seaway.
RADIO: All communications via Montreal radio, call sign VFN. Marine traffic control handle VHF traffic as follows: Between Tracy and Cap St. Michel, VHF Channel 10 (156.5 mHz.). From Cap St. Michel to Montreal, VHF Channel 13 (156.65 mHz.). Ship to ship communication, VHF Channel 6, (156.3 mHz.). Port radar service available.
BERTHING:

Berth number (usual name)	*Wharf length (ft.)*	*Depth along-side (ft.)*	*Remarks*
Bickerdike Basin			
M-6	714	15	
M-5	2,061	25	
M-4		25	
M-3		25	
M-2		25	
M-1	300	25	

Berth number (usual name)		Wharf length (ft.)	Depth alongside (ft.)	Remarks
Bickerdike Pier				
East Side	B-1	1,866	25–29	
	B-2		29	
	B-3		29	
North End				
	B-12-N	500	29	
West Side				
	B-4	1,923	29	
	B-5		29	
	B-6		29	
	B-7	1,172	29	
	B-8		29	
Windmill Point Wharf				
	5W	465	30	Total berthing length 1,023 ft.
	6W	500	30	
	7W	538	30	Grain loading
	9 W to 10W	1,226	30	Grain unloading
	11NE	297	14	
	11NW	135	14	
	12	987	14–29	
Alexandra Pier				
South Side				
Lower	3	583	33.5	Berth 3 and 5: Total berthing length of 1,175 ft. Grain loading
Upper	3			Passenger terminal "Iberville" upper shed 3
Lower	5	595	33.5	Parking only
Upper	5			Passenger terminal "Iberville" upper shed 5
End of Pier				
	14E	352	33.5	
North Side				
Lower	4	533	33.5	
Upper	4			
Lower	6	706	33.5	
Upper	6			
King Edward Pier				
South Side				
Lower	7	1,272	35	
Upper	7			
Lower	9		35	
Upper	9			
End of Pier				
	16E	354	33.5	
North Side				
Lower	8	1,278	35	"Louis Jolliette" passenger terminal. upper shed 8 Parking
Upper	8			
Lower	10		35	"Louis Jolliette" passenger terminal. upper shed 10
Upper	10			
Harbour Front				
Lower	11	587	29	Berthing length 475 ft.
Upper	11			
	12	700	35	
Jacques Cartier Pier				
	14	430	35	Grain loading
	17	620	35	
	18	692	29	
	19	696	29	
End of Pier	22N	247	29	
West Side				
	20	347	25	
Market Basin				
	21	460	25	
	22	547	25	Coastal
	23	678	25	Coastal
Sect. 24–42 inc.				
	24	384	29.5	
	25	965	29.5	
	27	829	29.5	
	28	807	30	
	29	827	30	
	30	490	30	Berth not available for Maritime traffic
	31	505	30	
	32	504	30	
	33	497	30	
	34	470	30	
	35	554	30	
	36	527	30	
	37	537	30	
	39	602	30	
	40	609	30–35	
	41	656	35	
	42	616	35	
Laurier Pier				
	43SW	437	30	Capable of handling containers.
	43SE	436	30	
	43N	572	32.5	Grain loading
	3S	494	32.5	
Tarte Pier				
	44S	739	32.5	
	44E	314	30	
	44N	860	30	Grain loading
	45	554	30	Berthing length 480 ft.
Sutherland Pier				
	46	472	32.5	
	46SE	532	32.5	Bulk sugar facility
	46E	227	32.5	
	47	330	32.5	Coastal trade Max. berthing length 305 ft.
Sect. 48/56 Inc.				
	48	644	32.5	
	49	601	32.5	Capable of handling containers
	50	623	32.5–35	
	51	786	35	
	52	1,114	35	
	54	1,295	35	Grain loading
	55		35	
	56	803	27	Grain unloading
Vickers East		1,515	30	Dry Dock
Vickers West		869	30	
Sect. 57–61 Inc.				
	57	649	30	One Bridge Crane
	58	650	31.5	
	59	572	32	Two gantry cranes, 20 tons each, capable of container handling
	60	407	32	
	61	535	32	
Sect. 62–68 Inc.				
Racine Wharf				
	62	394	30	
	63	772	30	
	64	834	30	
	66	815	30	
	67	710	30	
	68	708	30	
Container Terminal				
	70	594	35	Two travelling container cranes (28 tons and 45 tons capacity)
Sect. 71–78 Inc.				
	71	650	35	Two travelling cranes, 30 tons each
	72	650	35	
	73	633	35	One travelling container crane, 45 tons
	74	633	35	
	75	227	35	
	76	1,330	35	Total berthing length 917 ft. capable of handling containers
	77	—	—	
	78	1,378	35	
	79			

GRAIN FACILITIES:

Elevator No.	Capacity in bushels	Loading galleries at berths	Loading capacity bushels per hour	Remarks
1 (Section 15)	4,000,000	3–5	16,000	
3 (Section 43)	5,000,000	43N	16,000	
4	5,500,000	54–55	54,000	
5	5,100,000	7W	32,000	2 marine legs 1,590 ft. loading galleries. Unload at 9W–10W with 2 marine legs and a capacity of 72,000 bushels per hour

CRANES: Floating crane 275-ton capacity and many mobile cranes with capacity up to 200 tons.
STEVEDORES: Working hours 0800 to 1200, 1300 to 1700.
MEDICAL: All medical facilities available.
TANKERS:

Berth No. (usual name)		*Wharf length (ft.)*	*Depth alongside (ft.)*	*Remarks*
B. P. Berth	94	781	35	
Metropolitan Petroleum Ltd.				
	95	442	35	Total berthing length 1,328 ft.
	96	442	30–35	
	97	445	30	
Texaco				
	98	480	35	Total berthing length 1,442 ft.
	99	482	30–35	
	100	480	30	
Imperial Oil				
	101E	630	35	Total berthing length 1,263 ft.
	102E	631	35	
	102W	320	30	
Shell Oil				
	103S	622	35	
	103N	622	30	
Sun Oil				Can accommodate ships of 485 ft. length
	104	107	30	
Gulf Oil Canada				
	105	381	30	Total berthing length 763 ft.
	106E	382	30	
	106W	227	30	
Petrofina				
	109	455	35	Total berthing length 910 ft.
	110E	455	35	
	110W	537	15	
Marien Street Wharf				
	110	102	12	

FRESH WATER: Available by pipe-line at most berths.
FUEL: Oil – all grades can be delivered at oil companies' terminals; also by bunker barges to vessels lying anywhere in the harbour.
Coal – delivered direct to vessels at coal berths.

Dock and Location: Section No. 71 and 72.
Operator: Canadian Import-Weaver Fuels 5250 de Maisonneuve W, Tel. 484-1112.
Type of Dock: Loading and unloading.
Type of Cargo Handled: Fuel oil.
Size of Pipe-lines: 14 in. and 10 in.
Storage Capacity: 550,000 barrels.
Distance from Dock to Storage Tanks: 1,135 ft.
Length of Dock: 1300 ft.
Depth at Dock: 35 ft.

Dock and Location: Berth 94, East Montreal.
Operator: B.P. Canada Limited, 9301 Metropolitan, Anjou, Tel. 352-1700.
Type of Dock: Loading and unloading.
Type of Cargo Handled: Crude oil, gasoline, stove oil, marine fuel oil, marine diesel fuel, No. 2 fuel oil, No. 6 fuel oil.
Size of Pipe-lines: 16 in.; 12 in. and 10 in.; 10 in.; 12 in.; 12 in.; 12 in.
Storage Capacity (Barrels): 1,000,000; 430,000; 80,000; Production capacity: 15,000; 400,000; 300,000.
Distance from Dock to Storage Tanks: 3.5 miles; 1,500 ft.; 1,500 ft.; 3.5 miles.
Length of Dock: 781 ft.
Depth at Dock: 35 ft.

Dock and Location: Sections 98-100.
Operator: Texaco Canada Ltd. 10200 Notre-Dame St. E., Tel. 645-8811.
Type of Dock: Loading, unloading, bunkering.
Type of Cargo Handled: Gasoline, distillate fuel oils, crude oil, marine diesel fuel oils and bunker "C".
Size of Pipe-lines: 2–8 in.; 10 in.; 8 in.; and 2–6 in.; 16 in.; 8 in.; 6 in. and 4 in.
Storage Capacity (Barrels): 2,300,000; 1,200,000 and 500,000.
Distance from Dock to Storage Tanks: 1.5 miles.
Length of Dock: 1.442 ft.
Depth at Dock: 30-35 ft.

Dock and Location: Berth 101.
Operator: Imperial Oil Ltd., 10510 Notre-Dame E.
Type of Dock: Loading and unloading, bunkering.
Type of Cargo Handled: Crude oil, gasoline, stove oil, furnace oil, diesel fuel, bunker "C".
Size of Pipe-lines: 16 in.; 12 in.; and 8 in.; 10 in.; 12 in.; 12 in.; 16 in. and 12 in.
Storage Capacity (Barrels): 3,000,000. Total storage capacity rotated by products depending on seasonal demands.
Distance from Dock to Storage Tanks: 2,800 ft.
Length of Dock: Inside 712 ft. Outside 1263 ft.
Depth at Dock: 28 ft. and 35 ft.

Dock and Location: Berth 103 S. & 103 N. Montreal East, and Racine Wharf, foot Duquesne St.
Operator: Shell Canada Ltd., 10500 Sherbrooke St. East, Pointe-aux-Trembles, Que. Tel. Marine Bunkers and Lubricants: 866-7571.
Type of Dock: Loading and unloading.
Type of Cargo Handled: Gasoline, stove oil, furnace oil, chemicals jet fuel, aviation fuel, marine diesel, bunker "C", thin fuels 200 secs/3,500 secs. At Racine Wharf – lubricants.
Size of Pipe-line: 3–10 in.; 20 in.; 12 in. at Racine.
Wharf: 2–8 in.; 6 in.; 4 in.
Storage Capacity (Barrels): 4,000,000. Total storage capacity at Racine Wharf: 120,000.
Distance from Dock to Storage Tanks: 1.75 miles, 0.6 to Racine Wharf.
Length of Dock: 622 ft. at Racine. Wharf 505 ft.
Depth of Dock: 35 ft. S., 30 ft. N., at Racine Wharf 30 ft.

Dock and Location: Berth 104.
Operator: Sun Oil Co. Ltd. 11055 rue Victoria.
Type of Dock: Loading and unloading.
Type of Cargo Handled: Gasoline, No. 1 fuel oil, No. 2 fuel oil.
Storage Capacity (Barrels): 130,000; 80,000; 240,000; 530,000 (total).
Distance from Dock to Storage Tanks: 2,300 ft.
Length of Dock: 107 ft.
Depth at Dock: 30 ft.

Dock and Location: Berths 105 and 106.
Operator: Gulf Oil Canada Limited, 3501 Broadway. Tel. Marine Bunkers: 645–8767; Marine Lubes: 274-4453.
Type of Dock: Loading and unloading.
Type of Cargo Handled: Crude oil; gasoline; light fuels; marine gasoil; marine diesel; medium fuels 200 secs/3,000 secs; bunker "C".
Size of Pipe-lines: 12 in. and 8 in.; 10 in.; 3–8 in.
Storage Capacity (Barrels): 6,300,000 total storage capacity rotated by products depending upon production requirements.
Distance from Dock to Storage Tanks: 1 mile.
Length of Dock: 990 ft.
Depth at Dock: 30 ft.

Dock and Location: Sections No. 109 and 110.
Operator: Canadian Petrofina Ltd., 11701 Sherbrooke St. E. Tel. 645-9221.
Type of Dock: Loading and unloading.
Type of Cargo Handled: Gasoline; crude oil; No. 6 fuel oil; middle distilates.
Storage Capacity (Barrels): 650,000; 900,000; 300,000; 540,000.
Distance from Dock to Storage Tanks: 0.75 mile.
Length of Dock: 910 ft.
Depth at Dock: 35 ft.

FIRE PRECAUTIONS: Looped wire over stern and bow not more than 4 ft. above water for towing in case of fire.
GANGWAY/DECK WATCHMEN: Required.
OPENING/CLOSING HATCHES: Always done by stevedores.
CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes; 50 cigars; tobacco, 2 lb. per person over 16. Wine/Spirits, total of 40 oz. per person over age of 21.

Subsequent issues may be authorized to crew members of foreign vessels, but the max. quantity any crew member may hold at any one time must not exceed 300 cigarettes, 75 cigars, 3 lb. tobacco, and 60 oz. liquor.
IDENTIFICATION CARDS: Not required
CONSULS: (Consul General unless otherwise stated)

	Tel. No.		Tel. No.
Argentina	866-3819	Lebanon	276-2638
Austria	845-8661	Liberia	871-9121
Belgium	866-8678	Luxembourg	487-3387
Benin Rep.(Consul)	849-3695	Madagascar (Consul)	844-4427
Brazil	866-3313	Mexico	288-2502
Great Britain	866-5363	Monaco	844-0516
Chile	932-3225	Netherlands	866-4875/6
Columbia	849-4852	Nicaragua	486-5085
Costa Rica	866-8159	Nigeria (Consul)	845-6126
Cuba	843-8897	Norway	861-5542
Czechoslovakia	849-4495	Pakistan	845-2297/8
Denmark	849-5391	Panama	
Dominican Republic	738-1068	Peru	932-3692
E. Caribean Com. (Trade Officer)	866-7761	Poland	937-9481/2
Ecuador	849-0200	Portugal	487-4322
El Salvador (Consul)	876-8543	Romania (Trade Com.)	842-1779
Egypt	937-7781/2	Rwanda (Consul)	527-2859
Finland (Trade Com.)	866-2202	San Marino	871-3838
France	878-4381	Senegal	849-4191
Germany, Fed. Rep.	849-1134	South Africa (Consul)	861-5667
Greece	845-2105	Spain	935-5235/6
Guatemala	861-5919	Sweden	866-4019

Haiti	871-8993	Switzerland	932-7181/2
Honduras	935-9708	Syria (Consul)	363-2557
Hungary (Trade Com.)	849-9261/2	U.S.A.	281-1886
		U.S.S.R.	843-5901
Iceland	875-2071	Venezuela	842-3417/8
Israel	866-4048	Chad Rep. (Consul)	
Italy	849-8351	Thailand	866-8205
Japan	866-3429	Uruguay	481-1828
Korea	879-1910		

REPAIRS: All kinds of hull and engine repairs possible.
DRY DOCKS: Steel floating dock: Length 585 ft., lifting capacity 25,000 tons. Steel floating dock section: Length 400 ft., lifting capacity 17,500 tons. Steel floating dock section: Length 200 ft., Lifting capacity 6,700 tons.

The 200 ft. sections may be joined to either of the other docks, making the max. length for docking 785 ft.

All docks breadth at entrance 107 ft. Draft over keel blocks 27.5 ft.
REPATRIATION: All facilities available.
AIRPORT: International Airports at Dorval and Mirabel.
TIME: GMT minus 5 hours. Daylight saving time applied from last Saturday of April to last Saturday of October.
HOLIDAYS: New Year's day; Epiphany; Good Friday; Ascension Day; St. Jean Baptiste Day (June 24th); Labour Day; All Saints Day; Christmas Day.
POLICE/AMBULANCE/FIRE: Emergency telephones at berths, directly connecting berth with Police and Ambulance.
SHORE LEAVE: Permitted.
AUTHORITY: National Harbour Board.

NANAIMO, B.C.: 49.10 N. 123.57 W. (See Plan Book)

DOCUMENTS:
3 copies Crew List Form IMM.200.
1 copy Passenger List.
3 copies Ship Stores E.1.
3 copies Crew Declarations Y.14.
1 Quarantine Certificate.
Manifest from previous Ports.
PILOTAGE: See "Vancouver".
ANCHORAGES: See "Vancouver".
RESTRICTIONS: No restrictions on Nanaimo Assembly Wharf. Harmac Wharf restricted from 2245 to 0700 hrs.
MAX. SIZE: Ships of any size can be taken into harbour with safety. Controlling depths are: Harbour entrance, 57 ft. at high water and 44 ft. at low water. Mean channel depth, 31 ft. at LW. Mean rise of tide 13 ft.
HEALTH: Pratique granted at Victoria, B.C.
RADIO: Vancouver Radio.
TUGS: Join vessel at Gallows Point, Protection Island. Ship's lines to be used.
BERTHING: Berth A – 34 ft. LLW. Berth B – 34 ft. LLW. Berth C – 37 ft. LLW.
STEVEDORES: Ordered by Agent, 16 hours minimum notice.
MEDICAL: Hospital facilities available.
TANKERS: Tanker berths at private companies' wharves where own regulations on lines apply.
DENSITY: September to May inclusive 1.0203 average. June to August inclusive 1.0171 average.
FRESH WATER: Available ex wharf.
FUEL: Limited quantities available by truck delivery only.
FIRE PRECAUTIONS: No other specific precautions except during extreme heat when smoking may be prohibited on wharf adjacent to lumber.
GANGWAY/DECK WATCHMEN: Services not necessary but security guards are available.
OPENING/CLOSING HATCHES: Either crew or stevedores, by arrangement.
CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes per week or 0.5 lb. tobacco and 15 cigars. Wine and/or Spirit. Officers allowed 40 oz. liquor per week. Crew allowed beer only, any amount. *Note:* Beer is not bonded.
IDENTIFICATION CARDS: Not necessary.
CONSULS: None.
REPAIRS: Temporary repairs only.
REPATRIATION: Facilities exist in Vancouver.
AIRPORT: Cassidy Airport, 10 miles South of Port, scheduled flights. Seaplane service from Harbour to Vancouver or charter.
TIME: Pacific Standard Time, 8 hours behind GMT. Daylight Saving Time in effect from late April to late October.
HOLIDAYS:
(1) Sundays and Good Friday, Easter Monday, Victoria Day (24th May), Dominion Day (July 1st), Thanksgiving and Remembrance Day crews are available at overtime rates by arrangements.
(2) No cargo work on Christmas Day, Boxing Day and New Year's Day.
(3) Labour Day in case of emergencies only.
(4) Crews cease work at 1200 hrs. on December 24th until 0800 hrs. December 27th; also from 1200 hrs. December 31st until 0800 hrs. January 2nd.
POLICE/AMBULANCE/FIRE: Police 754–2345; Ambulance 753–4433; Fire 753–1234.
TELEPHONES: Available for each vessel.
SHORE LEAVE: Allowed.
AUTHORITY: Nanaimo Harbour Commission.

NANISIVIK, N.W.T.: 73.04 N. 84.32 W. (See Plan Book)

SHIPS OFFICERS REPORT. 1978.
DOCUMENTS: Standard Canadian documents, See "Montreal".
PILOTAGE: No pilotage.
ANCHORAGE: Anchorage can be obtained 15 miles within the entrance of Strathcona Sound, 8 cables off the South shore of the Sound in a berthing depth of 69 m. (228 ft.), clay. Good anchorage is reported to be available in English Bay in a depth of 15 m. (48 ft.).
RESTRICTIONS: Vessel must comply with Canadian Arctic Pollution Regulations which govern earliest and latest dates permitted within Arctic zones depending on vessel's ice classification, nature and quantity of cargo and fuel.
MAX. SIZE: Draft must not exceed approx. 40 ft. alongside dock. Mooring facilities feasible for vessels up to 50,000 tons gross but may prove awkward for those over 20,000 tons gross especially under S.E. wind conditions.
HEALTH: See "Frobisher Bay". Customs officer (R.C.M.P.) Acts as quarantine officer.
RADIO: Vessels bound North should pass messages through Frobisher Bay VFF until into Lancaster Sound where communications regarding ETA, etc. are relayed via Resolute Bay VFR. Direct communication with Nanisivik can be obtained through the airport. The vessel must transmit on 6596.5 and receive on 5366.5. Airport call sign XOY 817.
VHF: No facilities available.
BERTHING: No special requirements. The dock consists of three parallel 70 ft. wide cells which are 55ft. apart. The centre cell supports the shiploader. The right and left hand cells each have two bollards (see plan) each with an additional bollard 150 ft. in from the dock face. To the East and West of the dock there are dolphins supporting single bollards. To connect to these the ship's bow and stern lines are towed ashore and attached to a 0.5 in. diameter × 600 ft. heaving line. Once ashore the lines are shackled to a 3.25 in. diameter × 380 ft. mooring line which is secured to the bollard. The lines are then taken up and made fast.
CRANES: The only shore cranes available are mobile units when they are not in service by the mine.
BULK CARGO FACILITIES: One fixed shiploading gantry capable of loading 100 tonnes per hour. The facilities are automatically shut down when winds exceed 50 m.p.h.
STEVEDORES: As per contract.
MEDICAL: The community has a large modern nursing station with a full time nurse and occasionally a doctor. No advance notice required. Transportation provided by mine vehicles. For serious medical cases vessels should radio in advance so air transportation can be arranged to Frobisher Bay's hospital.
DENSITY: Density varied with ice conditions and tides. Note — When reading densities it has been found that different readings have been found at different depths due to ice melting.
FRESH WATER: Available by tank truck from nearby lake.
FUEL: Not available.
REPAIRS: Minor repairs only i.e. welding etc., by mine personnel.
GANGWAY/DECK WATCHMEN: Not obligatory but recommended due to sudden changes in wind and tide.
OPENING/CLOSING HATCHES: Carried out by crew.
CUSTOMS ALLOWANCES: Standard Canadian allowance except no beer or alcohol permitted ashore. This restriction strongly upheld by R.C.M.P.
REPATRIATION: Crew changes can be effected 3 times weekly to or from Montreal. Mine requires one week advance notice for lodging arrangements.
AIRPORT: Approx. 8 miles from dock, transportation provided courtesy of mine.
TIME: GMT minus 5 hours. Daylight saving time applied from last Saturday of April to last Saturday of October.
SHORE LEAVE: Permitted.
TELEPHONES: Not available on or near dock. Phone calls can be made from the mill offices or in the community.
AUTHORITY: Nanisivik Mines Limited, Nanisivik, N.W.T.

NORTH SYDNEY, N.S.: 46.16 N. 60.13 W.

DOCUMENTS: And all general information, refer to "Sydney, N.S.".
PILOTAGE: Compulsory. Pilot boards off Cranberry Head. Refer to "Sydney N.S.".
RESTRICTIONS: Navigation season approx. 1st April to 15th January. Channel depth 42 ft.
ANCHORAGE: Above the ballast ground in depths of 5 to 7 fathoms.
PRATIQUE: Obtained at Sydney, N.S., by radio.
MAX. SIZE: Draft 35 ft. 6 in. for entering harbour. Berthing restricted by depth alongside.
TUGS: Available, but not normally required.
BERTHING: Canadian National Railway Pier: 1,080 ft. length, depth alongside 25 to 35 ft.
FRESH WATER: Available from wharves.
FUEL: Fuel and diesel can be supplied.
REPAIRS: Machine shop facilities for hull and engine repairs.
AUTHORITY: Dept. of Transport, Harbour Master.

OCEAN FALLS, B.C.: 52.21 N. 127.41 W.

DOCUMENTS:

2 Crew Lists.
2 Passenger Lists.
3 copies Inward Report (Customs A6).

PILOTAGE: Compulsory. Pilots may be taken at Vancouver or Victoria. ETA to be given to Pilots 6 hours before arrival through radio station VAK.

ANCHORAGE: In harbour, ample room for any size vessels.

RESTRICTIONS: Channel depth 25 fathoms.

MAX. SIZE: For berthing alongside, length 600 ft., draft 30 ft.

HEALTH: Ships from overseas are given pratique at William Head.

RADIO: Vancouver Radio, VAK.

TUGS: Not usually considered necessary. Can be made available by prior arrangement.

BERTHING: Ocean Falls Corporation owns four wharves depth alongside 31 ft. at low water.

FRESH WATER: Available from wharves, free of charge.

REPAIRS: Minor repairs to hull and machinery can be effected. No dry docks.

STEVEDORES: Gangs of longshoremen can be hired by arrangement.

AIRPORT: West Coast Air operate daily seaplane service to Vancouver.

MEDICAL: Hospital facilities available.

CUSTOMS ALLOWANCE: 200 cigarettes or 2 lb. tobacco may be held out of bond per person, and 40 ounces of alcohol.

SHORE LEAVE: Crew members allowed ashore.

HOLIDAYS: Easter Monday; July 1st; Labour Day; Thanksgiving Day; Remembrance Day; Christmas and Boxing Day; New Year's Day.

POLICE/FIRE/AMBULANCE: Police tel. 289-3311; Fire 289-3828; Ambulance 289-3828

AUTHORITIES: Dept. of Transport, Ron Acheson, Harbour Master.

OSHAWA, Ontario: 43.52 N., 78.50 W. (See Plan Book)

PORT LIMITS: The limits of the Oshawa Harbour is defined as follows:

All the waters of Lake Ontario within the following limits: Commencing at the high water mark of Lake Ontario where it intercepts the Easterly limit of Lot 1 of the broken front concession of the Township of East Whitby.

Thence along the high water mark in a Westerly direction to a point where it intercepts the Westerly limit of Lot 17 of the broken front concession of the Township of East Whitby.

Thence in a Southerly direction 3,000 ft. into Lake Ontario on the extension of the said Westerly limit of Lot 17;

Thence on a straight line in an Easterly direction to a point on a Southerly extension of the said Easterly limit of Lot 1, 3,000 ft. from the high water mark.

Thence in a Northerly direction to the point of commencement.

And all water-front property, wharves, piers, docks, buildings, shores and beaches in or along the said waters.

DOCUMENTS: The matter of documentation is done through Hub Transportation Services Limited (Terminal Operator) in conjunction with the Customs Office located at the City of Oshawa.

ANCHORAGES: Off the entrance of Lake Ontario.

RESTRICTIONS: Draft 25.6 ft. at the East Wharf. 22 ft. on the West Wall.

MAX. SIZE: Applies to maximum size of vessels entering seaway.

HEALTH: Normal formalities are conducted at first port in Canada in the St. Lawrence Seaway or East Coast, and therefore the vessel is usually considered cleared prior to entering the Seaway system.

RADIO: Toronto VOR or by telephone: (416) 576-0400.

VHF: Presently Nil.

RADAR: None.

TUGS: Tugs available at the harbour entrance. Cost: $800.00 per tug inwards and likewise outwards.

BERTHING: East Wharf – 730 ft., Draft 25.6 ft. West Wharf – 590 ft., Draft 22 ft. Discharging: Ship's gear or shore equipment.

East Wharf – General Cargo, Petroleum, sugar, Steel, Automobiles.

West Wharf – Gypsum, Salt, Petroleum Products, Coal, Steel.

CRANES: Mobile cranes having a capacity of up to 300 tons are available at all times. 2 of these cranes are stationed at the Port of Oshawa and same have respective capacities of 150 and 100 tons.

BULK CARGO FACILITIES: Dry bulk cargoes with the exception of sugar, i.e. coal, salt and gypsum, are carried by self-underloaders and discharged by ship's gear. Sugar is discharged by mobile cranes using clam grabs at a rate of 225/250 t.p.h. Present discharging gear by high water level, specific details will be made available on request.

BRIDGES: None.

STEVEDORES: The port stevedore (Hub Transportation Services Limited) employs members of the I.L.A., Local 1997, and 4 gangs are available from this local.

The main commodities handled are unitized general cargo, containerized general cargo, import and export steel, and raw sugar.

The productivity rate is above average, with general cargo usually reaching a level of 20 tons plus, per gang. Depending on units, weights, runs somewhere in the region of 60 to 125 tons per gang hour. Bulk commodities are usually discharged at a rate of 250 t.p.h.

MEDICAL: A full range of medical services is available at the local Medical Clinic and Oshawa General Hospital.

FRESH WATER: Fresh water available at East wharf only.

FUEL: Available on request.

FIRE PRECAUTIONS: Usual regulations.

CONSULS: All major consuls in Toronto, 29 miles away.

REPAIRS: Available on request.

DRY DOCKS: Information on request from Hub Transportation Services Ltd.

SURVEYORS: Classification Societies are represented by Lloyds, ABS and N.V. in Toronto.

GANGWAY/DECK WATCHMEN: Not required at the Port of Oshawa.

HATCHES: The opening and closing of hatches is normally carried out by ship's crew.

CUSTOMS ALLOWANCES: In accordance with Canadian standards.

CARGO GEAR: Wherever possible by shore crew.

REPATRIATION: Possible.

AIRPORT: Toronto International Airport. All major airlines, 45 miles West.

TIME: EST.

HOLIDAYS: Usual holidays with the exception that Ontario celebrate Civic Holiday which is the first weekend in August. Cargo work can be arranged.

POLICE/AMBULANCE/FIRE: Police, 579-1234. Fire Department, 725-6574. Ambulance, 576-8711.

TELEPHONES: Arrangements can be made through Bell Canada for telephones to be placed on board. A cost of approximately $24.75 installation charge per line.

SERVICES: All services available on request to Terminal Operator.

SHORE LEAVE: Possible.

IDENTIFICATION CARDS: Seaman's book is sufficient.

AUTHORITY: Oshawa Harbour Commission.

PICTOU, N.S.: 45.41 N. 62.43 W.

DOCUMENTS:

Customs Report Inwards, Form A6 in duplicate.
Clearance from last port.
Stores List, Form E1 in duplicate.
Crew Declarations, Form Y14 in duplicate.
Crew List, Immigration Form 200 in duplicate.
Quarantine Q25 in duplicate.
Fumigating and Deratting Certificate.
Load Line Certificate.
Inspection Certificate.
Safety Equipment Certificate.
Radiotelegraphy Certificate.
Certificate of Register.

If Pictou is first port of call in Canada photostat copies of the ship's ocean bills of lading in duplicate to cover all goods for discharge in Canada.

PILOTAGE: Normally arranged through Halifax as there is no radio station in Pictou. Various pilot boats in use.

ANCHORAGE: Safe anchorage all over harbour in 40 ft.

RESTRICTIONS: No entry restrictions except draft over bar at entrance to harbour, which is 22 ft. low water.

MAX. SIZE: Government pier 720 ft. long with 27 ft. water on both sides.

HEALTH: Masters must complete Quarantine Form QS.25. Vessel may be quarantined by port doctor, if any disease on board.

RADIO: Halifax, call sign, VCS, Channels 26, 59, 79. Alternate Charlottetown call sign VCA, Channel 59.

TUGS: Not necessary for berthing.

BERTHING: No specific requirements; berths usually available at all times.

STEVEDORES: Usually 24 hours notice required for stevedores.

MEDICAL: Hospital facilities available. Serious cases may be transferred to larger hospital at New Glasgow 8 miles distant, or to Halifax 100 miles distant.

FRESH WATER: Supplied by town through 4 in. line. Water pressure 110 pounds.

FUEL: Diesel fuel available in quantity. 24 hours notice required for bunker fuel as it is only brought in on order.

GANGWAY/DECK WATCHMEN: Not usually required unless requested by ship.

OPENING/CLOSING HATCHES: Usually by crew.

CUSTOMS ALLOWANCES: Tobacco, 200 cigarettes per man. Issue may be made if ship is in port for long periods. Wine/Spirits: One bottle per man.

IDENTIFICATION CARDS: Not required. Customs and Immigration Officer should be notified if any crew member wants to travel any distance from port area.

CONSULS: None.

REPAIRS: Facilities to carry out all types of ship's repairs, including deck, engine, electrical and hull repairs.

DRYDOCKS: Largest dry dock, 2,000 ton capacity, 250 ft. long, 42 ft. beam.

REPATRIATION: Crewmen repatriated through Halifax.

AIRPORT: Closest airport at New Glasgow, 8 miles distant. Airport served daily by Eastern Provincial Airlines which connect with Halifax. No international airlines use this airport.

TIME: Eastern Standard Time GMT minus 5 hours. Daylight saving time from last week-end in April to last week-end in October, clocks advanced 1 hour.

HOLIDAYS: New Year's Day; Good Friday; Easter Monday; Queen's Birthday (May 19th); Dominion Day (July 1st); Labour Day (1st Monday in September); Thanksgiving Day (2nd Monday in October); Remembrance Day (November 11th); Christmas Day; Boxing Day. Cargo normally not worked on holidays. Would have to be arranged with stevedoring company.
POLICE/AMBULANCE/FIRE: Police 485-4363; Fire 485-4141; Ambulance 485-4381.
TELEPHONES: Facilities available for placing telephones on ships.
GENERAL: For larger and bulk cargoes stevedores should be notified well in advance. Rates vary according to the type of cargo.
AUTHORITY: Department of Transport, Harbour Master.

PORT ALBERNI, B.C.: 49.14 N. 124.50 W.

(See Plan Book)

DOCUMENTS, HEALTH, CONSULS, ETC.: See "Vancouver".
PILOTAGE: Compulsory, contact through Vancouver Radio. Pilot boards at Cape Beale.
ANCHORAGE: Deep water anchorage available in harbour, depths up to 60 ft.
RESTRICTIONS: Depths in approaches 84 ft. MLLW.
VHF: Channel 11 (VTM Tofino); Channel 6, tugs and inter-harbour traffic.
TUGS: Available and required for berthing.
BERTHING: Pulp and paper wharf with two berths supplied directly from MacMillan Bloedel's pulp and paper mill. Berthing length has been increased to 700 ft. with 39 ft. depth on the West side using pile dolphins; on the East side berthing length remains at 500 ft. with 33 ft. depth. Storage sheds in the centre, with specialised equipment for loading pulp and rolls of paper. A smaller berth in the river is used for loading 7,200 ton cargoes on specially covered newsprint barges.

Somass Sawmill Wharf: berthing length 950 ft. with 34 ft. depth; cranes of 5 and 30 ton capacity.

New Port Alberni Terminals Berth 3: 600 ft. long and, with the aid of pile dolphins, can berth ships of 700 ft. and over, with a depth alongside of 40 ft.

Port Alberni Terminals Berths 1 and 2: berthing is 1,050 ft. with 36 to 50 ft. depth. Storage sheds and forklifts.
CRANES: 2 mobile cranes – one 50 ton and one 30 ton.
STEVEDORES: 15 Gangs available. Refer "Vancouver" for holidays, etc.
MEDICAL: Doctors and hospital facilities available.
DENSITY: 1012, approximately.
FRESH WATER: Available at wharves.
FUEL: Supplies by barge from Vancouver.
CUSTOMS ALLOWANCES: See "Vancouver".
REPAIRS: Machine shop capable of major repairs.
AUTHORITY: Port Alberni Harbour Commission.

PORT ALFRED (Including Bagotville) (See Plan Book)

Quebec: 48.20 N. 70.52 W.

DOCUMENTS:
2 Crew Lists.
2 Passenger Lists.
3 Crew's Declaration (Can. Form Y.14).
3 Stores Lists (Can. Form E.1).
Quarantine (Can. Form QS.2001).
3 Cargo Manifests.
3 Bills of Lading.
2 Stowage Plans.
Harbour Master Dues receipt.

PILOTAGE: Pilotage is compulsory. A minimum notice of 24 hours must be given to ensure availablity of Pilot. This notice to be confirmed 12 hours and 4 hours prior to arrival at pilot station. Reports stating ETA and Net Reg. Tonnage of Vessel to be addressed to "Pilots Montreal" and passed by the Marine Traffic Control communication system on VHF Channel 14 (156.7 mHz), or by any coast radio station.

The Pilot station for vessels upbound to Baie des Ha! Ha! is located at Anse-aux-Basques, charted 2 miles S.W. of Les Escoumins Wharf on the North shore of the St. Lawrence river and for downbound vessel at Quebec City.
ANCHORAGE: Vessels awaiting berthing facilities anchor off Anse a Philippe (48.21 N., 70.73 W.).
RESTRICTIONS: None. Vessels may enter or depart at any time of day or night.
MAX. SIZE: Vessels of up to 39 ft. draft may berth at Duncan Wharf and up to 30 ft. at Powell Wharf. Length and breadth not considered.
HEALTH: Pratique obtained by cable to Quarantine Quebec, and serves for duration of vessel's stay in Canada. See also "Montreal".
RADIO: Halifax Radio Station used by vessels while in Atlantic and Sept-Iles Radio Station while in Gulf of St. Lawrence.
VHF: VHF radio telephone Channel 9 (Escoumins Channel).
TUGS: Two tug-boats available 2,400 h.p. and 1,050 h.p. Join vessel 1 mile off wharves at Port Alfred. Ship's lines used.

BERTHING:
N.H.B. Facilities

Berth number (usual name)	*Wharf length (ft.)*	*Depth at Low Water (ft.)*	*Remarks*
Bagotville			
Main Wharf			
(outer face)	167	28	
Lepage			
(outer face)	79	10	
Grande Baie Wharf	833		
(outer face)	44	—	

Private Facilities

Berth	*Length (ft.)*	*Depth at Low Water (ft.)*	*Utilisation and General Remarks*
Port Alfred (Alcan Smelters and Chemical Ltd, Transport Division).			
(1) Powell Wharf			
South Side	1,138	33	Floor capacity 20,000 tons.
North End	481	39	Two 5 ton electric level-luffing gantry cranes (bucket or hook) operate on a 35 ft. apron.
Across outer end	215	36	
(2) Duncan Wharf			
South Side	1,265	39	For unloading bauxite and salt (bulk). Three electric gantry towers. 500 t.p.h. each, and one for general and bulk, 10 ton capacity. Also two electric towers 1,000 t.p.h. each.
(3) Consolidated Bathurst			
North Side	600	25	

STEVEDORES: ETA sent by cable 72, 24 and 12 hours prior to arrival is sufficient to arrange gangs.
MEDICAL: General hospital at Chicoutimi located 13 miles away, in addition to local hospital.
TANKERS: One 14 in. discharge line using 10 in. and 12 in. discharge hoses. ASA fittings. No slop discharge facilities. One berth available for tankers at 39 ft. draft. (No. 4 Powell Wharf).
DENSITY: 1005.
FRESH WATER: Available at most berths.
FUEL: Only small quantities of O.M. diesel available by tank trucks.
FIRE PRECAUTIONS: Alcanport have a trained fire-fighting crew and fire hydrants installed at all strategic points. No-smoking on all wharves and in ship's holds.
GANGWAY/DECK WATCHMEN: To be attended by ship's personnel.
OPENING/CLOSING HATCHES: Done by crew on bulk discharging. On general cargo, stevedores open and close hatches.
CUSTOMS ALLOWANCE: One carton (200) cigarettes allowed for each Crew member. Wine and/or Spirits, one bottle for Officers and crew and 5-6 bottles to Master.
IDENTIFICATION CARDS: Not required.
CONSULS: Norway, Italy and France.
REPAIRS: Only minor deck and engine repairs.
SURVEYORS: Lloyds at Quebec City. AB and BV at Montreal.
REPATRIATION: Facilities convenient for crew charges.
AIRPORT: At Bagotville, 6 miles from dock, Daily service to Montreal, Quebec City, Sept-Iles and Baie Comeau.
HOLIDAYS: 1st & 2nd January, Easter Monday, St. Jean Baptiste Day (24th June), Confederation Day, 1st July, 2nd Monday of August, Labour Day & 25th December.
POLICE/AMBULANCE/FIRE: Police 544-6804; Fire 544-6804; Ambulance 544-5840 or 543-0755.
TELEPHONES: Telephone outlets at each berth; telephone can be put on main deck of vessels at no charge.
SHORE LEAVE: Crew members allowed ashore.
AUTHORITY: Alcan Smelter and Chemicals Ltd. Transport Division, Port Alfred.

PORT ALICE, B.C.: 50.22 N. 127.28 W.

PILOTAGE: Compulsory. Pilots can be secured off Cape Beale, Barkley Sound, South end of Vancouver Island. Master should advise "Pilots Victoria" via Radio Station VAK giving their ETA Cape Beale.
ANCHORAGE: Good anchorage within one half mile of dock in 30 fathoms.
HEALTH: The nearest station is at Victoria, B.C. Ships coming from foreign other than U.S.A. ports and having duplicate pratique from same to British Columbia ports other than Victoria must obtain Radio pratique through Victoria, B.C.

TUGS: Small tug (335 h.p.) and line boat available to assist berthing and departure if required.

BERTHING: Controlling depth from entrance of Quatsino Sound to Port Alice dock 24 fathoms. A draft of 25 ft. can be handled alongside dock and a vessel 525 ft. in length can be berthed with safety.

Oil tankers with draft up to 35 ft. and 580 ft. in length can berth against berthing scow positioned between dock and oil tanker. (Width of scow 35 ft.).

Bulk Carriers with draft of 35 ft., 565 ft. in length are berthed approximately 16 ft. out from dock by means of log fenders. Gantry of monck cranes extending over apron of dock. Largest ship handled of this type, 29,500 d.w.t., draft 35 ft. 4 ins. (Cargo loaded – Units of woodpulp).

STEVEDORES: Working day of 12 hours.

MEDICAL: 12 bed hospital, physician in attendance.

FRESH WATER: Available.

FUEL: Limited quantity of diesel oil. Fuel oil only available in an emergency from gravity hose on dock, vessel must supply hoses.

CONSULS: None.

REPAIRS: Minor repairs can be made in the company workshop.

CUSTOMS: Customs board at Port Alice.

CARGO GEAR: No shore cranes, ships use own gear.

AIRPORT: 35 miles from Port Alice, daily service.

HOLIDAYS: All Dominion legal holidays.

GENERAL: Port Alice is a private port open to navigation all year round. Limited quantity of supplies available.

AUTHORITY: Rayonier Canada Ltd.

PORT CARTIER, Quebec: 50.02 N. 66.47 W.

(See Plan Book)

DOCUMENTS:

Immigration

Crew List Form IMM.200 in triplicate or IMCO No. 6.

Customs

Report inwards (A.6) in triplicate.
Crew Declaration (Y.14) in triplicate.
Ship's Stores List (E.1) in triplicate.
Ship's Register.

The above forms will be supplied by mail on request.

The Master shall also have ready for inspection by Customs:—

Ship's Register.
Clearance from Last Port.
Manifest of cargo.
Also see "Health".

On Canadian or International Crew lists, black pen or typewriter must be used. Blue is not acceptable because of copy reproduction difficulties.

Designation and dates of expiry of all major trading certificates is required for outward clearance.

Arrangements have been made so that loading can commence before customs entry has been completed, and customs outward papers will be completed so as not to interfere with immediate departure after completion of loading.

Also see "Shore Leave".

PILOTAGE: Pilotage is compulsory at Port Cartier for docking, sailing and, at Port Authority's discretion, for changing berths.

An exception is made in the case of Coasters or vessels less than 350 ft. LOA unless requested by the Master, or, if considered necessary by the Port Authority.

Pilot will board vessels from attending tug or harbour tender approximately one mile off the harbour entrance.

It is the responsibility of all vessels to ensure that the Pilot ladder is in good condition and in a safe position for the boarding of the Pilot.

Frequencies for VHF communication with Pilot and harbour office. Calling 156.8 megs. Receiving/transmitting 156.6 megs. Internal harbour (tugs and Pilots) 156.35 megs.

Vessels over 40,000 d.w.t. shall also provide accommodation ladder with rope ladder alongside. The landing platform of the accommodation ladder should be approximately 20 ft. above the water.

APPROACHES: The depth of water in the harbour is 50 ft. at Mean Low Tide. A depth of 54.5 ft. at Mean Low Tide is maintained in the channel for a width of 200 ft. on each side of the centre line of approach into the harbour. For a distance of 300 ft. on both sides of this channel a depth of 40 ft. at MLW is maintained.

ANCHORAGE:

Anchorage areas have been established as follows:

Designator	*Position*
A.	50° 00′ 57.0″ N., 66° 46′ 36.2″ W.
B.	50° 01′ 07.1″ N., 66° 45′ 44.5″ W.
C.	50° 01′ 16.4″ N., 66° 44′ 53.2″ W.
D.	50° 00′ 32.8″ N., 66° 45′ 44.5″ W.
E.	50° 00′ 22.7″ N., 66° 46′ 35.0″ W.
F.	49° 59′ 56.5″ N., 66° 48′ 43.0″ W.
G.	49° 59′ 44.0″ N., 66° 49′ 32.8″ W.

RESTRICTIONS: Vessels with 50 ft. draft and over must sail on the tide. Tidal range 6 ft. to 12 ft.

MAX. SIZE: Max. size of vessel 1,000 ft. length, 170 ft. beam, max. draft 54 ft.

Vessels of 100,000 d.w.t. and over must have a draft not exceeding Fwd. 33 ft. and Aft 38 ft. on arrival. Also see "Berthing" and "General".

HEALTH: All vessels should 24 hours before arrival and during normal office hours, 0900–1700 hrs. (holidays and Sundays excepted) radio "Quarantine Montreal, Quebec" for radio pratique. Ships trading between Canada and the United States continuously and touching no other foreign port, since last granted Canadian pratique, comply with the above, only on first trip to Canada.

The information to be provided to the quarantine officer is:

(a) the name and nationality of the vessel;
(b) the ports called at during the voyage of the vessel;
(c) the nature of the cargo on board the vessel;
(d) the number of persons comprising the crew of the vessel;
(e) the number of passengers on board the vessel;
(f) the port of destination of the vessel and the name of the vessel's owner or, if the owner is not in Canada, the name of the vessel's Agent in Canada;
(g) the condition of all persons on board the vessel and details of any death or illness occurring during the voyage;
(h) whether the body of any person is being carried on the vessel;
(i) the estimated time of arrival of the vessel at the port of destination;
(j) the number of persons on board the vessel who are not in possession of valid evidence of immunization to smallpox; and
(k) the date and place of issuance of any de-ratting certificate or de-ratting exemption certificate applicable to the vessel.

Vessels inspected by Port Health Officer soon as possible, in berth or not.

Persons not in possession of valid smallpox certificate are re-vaccinated if vessel arriving from suspect area.

Masters shall have ready for inspection:

Maritime Declaration of Health Form Q.S.2001 in duplicate.
Deratisation Certificate.

All Smallpox vaccination certificates of crew and passengers if vessel is arriving from an infected Port – otherwise not necessary.

Medical parades of crew may be conducted by the Port Health Officer on vessel's arrival alongside.

RADIO: Cable Address "Cartier" Port Cartier.

Vessels entering the Gulf from the Atlantic should keep watch on Halifax Radio for all traffic. Information as to time of reports and frequencies will be found in International Radio Aids to Navigation Manual.

Traffic List	420 kHz	Even hours plus 50 GMT
	2582/161.9	Even hours plus 40 GMT

Weather, Ice Reports and Notice to Shipping.

Channel 59	Receiving Frequency 2582 kHz.	
Channel 26	Receiving Frequency 161.9 mHz.	1330 GMT
and CW		1830 GMT
		0130 GMT

When vessels are 36 hours from Port Cartier, they should keep W/T watch on VCK Seven Islands radio for traffic from this Port.

Seven Islands Calling and Receiving:

W/T Frequency	Calling	500 kHz.
R/T Frequency	Transmitting	2582 kHz.
	Calling	2182 kHz.
	Receiving	2206 kHz.
R/T (Duplex)	Transmitting	2582 kHz.
	,,	2514 kHz.
	,,	2550 kHz.
	Receiving	2206 kHz.
	,,	2118 kHz.
	,,	2158 kHz.

Port Cartier Calling and Receiving:

VHF	Calling		156.8 mHz.
	Receiving & Transmitting	Channel 12	156.6 mHz.
	Internal Harbour (Tug & Pilot)		156.35 mHz.

The Port Office telephone number is (418) 768-2485, and Telex number is 051-8-6422. It is also fitted with VHF on the frequencies mentioned above. The office is open to receive messages on a 24-hour basis. Radio and radio telephone traffic by a ship at anchor in the area off Port Cartier is permissible.

Ice Information and Routing: Ships travelling within the Eastern Canada Traffic Zone may request ice information and ice routing from ECAREG CANADA through the nearest Coast Guard Radio Station.

Refer to Notice to Mariners 561/77 – The Eastern Canada Traffic System and Notice to Mariners 25–7. For information on the St. Lawrence River Vessel Traffic Management (VTM).

N.B. Ships trading in the Gulf of St. Lawrence during this period should avail themselves of the Canadian Government Publication *Ice Navigation in Canadian Waters.*

ARRIVAL ADVICE: Also see "General". ETAs – All vessels must advise ETA 72 hours, 48 hours and 24 hours, before arrival. If any change in ETA of more than one hour occurs after transmission of the 24 hour ETA, the vessel must send a corrected ETA immediately. These ETAs shall be submitted in local time at Port Cartier.

In the 72 hours ETA vessels will advise: Tonnage of cargo required; Grain fittings, if any; Quantity orders for supplies; Bunkers, water and cash advance requirements; and Bonded stores.

In the 24 hours ETA vessels will advise the estimated time for pumping ballast after arrival alongside. However, if because of weather or any other cause the estimated pumping time should change, the Port Authority will be notified immediately.

All ships shall request docking instructions 2 hours before arrival.

TUGS: Compulsory, with the exception of Coasters or vessels less than 350 ft. LOA unless requested by the Master, or, if considered necessary by the Port Authority. Meet vessel outside harbour under instructions from Pilot. Tug lines used at all times. Two tugs of 3,800 h.p. available.

BERTHING: North dock 2,500 ft. long includes No. 1 West Berth, length 1,000 ft., for ore loading, and No. 4 East berth, length 1,500 ft., for Bentonite and Limestone discharge and as a standby berth. The South dock length 1,480 ft. includes No. 2 West berth for discharging grain, and No. 3 East berth for loading grain. Tanker berths also located on the South dock. Berth No. 5 on the South side of the South dock for general cargo use by coastal vessels only. Coastal vessels also use Berths No. 1, 2 and 3 when permitted by the Port Authority.

Vessels cautioned not to use anchors in harbour in case of damage to bubbler system installed on the bottom of harbour. The bottom is smooth surface rock and anchors are of very little value.

Faces of all berths fitted with rubber tyre fenders. All mooring ropes and wires should have eyes at least 8 ft. in diameter.

Mooring bollards are positioned 75 ft. apart at Berths No. 1, 2 and 3. There are also bollards at every pier at Berth No. 4. All bollards except those at Berths No. 2 and 5 are 4 ft. in extreme diameter and all mooring ropes and wires should have eyes at least 8 ft. in diameter.

The East Breakwater Cells are cathodically protected. The cabling and anodes extend approximately 60 ft. from the cells, affording all round protection. The use of anchors, or equipment likely to damage this protection, is not permitted within these areas.

Bentonite and Limestone: The Bentonite and Limestone discharging facility has a rated capacity of 1,500 t.p.h., with the discharge hopper being in a fixed location on Berth 4.

Also see "General".

MEDICAL: Hospital facilities and dentist available.

TANKERS: No facilities for slop discharge.

DENSITY: Has been known to vary slightly between 1025 and 1021, but is considered salt.

FRESH WATER: Available to all vessels at Berths No. 1, 2, 3, 4 and 5 with connections conveniently located. Rate of approximately 20 t.p.h. The fresh water line is 6 in. with 2.5 in. standard Quebec hose, male connection of 7 threads to the inch. Necessary connections and hoses are to be furnished and handled by vessel.

If required, fresh water can be supplied to vessels at anchor Max. amount per trip 50 tons. Cost per trip $200.

FUEL: Available at Berths No. 1, 2 and 3 for Bunker "C" marine diesel and/or any specialised blend and connections are positioned for ready supply to all vessels. All bunker requirements are directly supplied by Gulf Oil Canada Limited, and proper credits should be established. Bunker "C" can be supplied at approximately 2,300 barrels per hour. Marine diesel oil can be supplied at approximately 1,600 barrels per hour, Bunker "C" line is 10 in. with 6 in. reducer flange connection. Marine diesel oil line is 8 in. with 4 in. reducer flange connection. There is no coal available at this port.

Vessels nominated for Port Cartier and required to anchor awaiting a berth, which in the meantime require bunkers, will be permitted to enter the harbour, if a berth is available with bunkering facilities, for the purpose of bunkering, and shall then return to anchor. The fee for this service shall be $1,950 plus second tug when used; and applicable line handling charges when used.

GANGWAY/DECK WATCHMEN: Not necessary. Security guards obtainable on request.

OPENING/CLOSING HATCHES: Normally done by crew.

CUSTOMS ALLOWANCES: Canada Customs regulations allow each crew member to have in his possession for his personal consumption 200 cigarettes, 50 cigars, 2 lbs. pipe tobacco and 40 oz. of spirits. All quantities must be declared on Crew Declaration Form Y-14 along with all personal effects such as Radios, Cameras, Tape Recorders, Binoculars, Souvenirs, etc., plus serial numbers of these items.

N.B. Masters of vessels are advised that tobacco items and spirits in excess of these amounts in possession of crew members should be collected and placed in bonded stores prior to the vessel's arrival in order to speed up the clearance of the vessel.

Canadian seamen returning from voyages to American or other foreign ports are permitted $50 value of duty free merchandise every quarter for periods outside Canada of over 48 hours and $150 once a year for periods outside Canada of 7 days.

IDENTIFICATION CARDS: Not necessary.

REPAIRS: Minor repairs can be effected, under supervision of ship's personnel.

REPATRIATION: Crew changes and repatriation can be carried out.

AIRPORT: Nearest airport is Seven Islands about 40 miles by road. Services to Quebec City and Montreal, 4 flights daily.

TIME: Port Cartier is located in the Eastern Standard Time Zone (GMT less 5 hours). Daylight Saving Time (GMT less 4 hours) is observed from last Saturday in April to last Saturday in October.

HOLIDAYS: See "General".

POLICE/AMBULANCE/FIRE: Police 766-2233; Ambulance/Fire 768-2300.

TELEPHONES: No direct connections to vessels. Available on berths.

POLLUTION: The discharge of oil and garbage into the waters of Canada is prohibited by strictly enforced regulations which provide heavy penalties on summary conviction. Every precaution must be taken to prevent escape of oil from a vessel, but should such an escape occur, the regulations require that vessel immediately report it to the nearest Steamship Inspection Office, or to the Chairman, Board of Steamship Inspection, Ministry of Transport, Ottawa.

SERVICES: Electronic repair services to navigational equipment. Should be requested in advance.

SHORE LEAVE: All ships arriving from a foreign port will be boarded by Customs and Immigration Officers. Ship's personnel are not allowed ashore until permission is granted by these Officers.

DELAYS: Occasionally Easterly weather conditions may delay vessels berthing.

GENERAL: Vessels which have completed discharging of grain and are to load iron ore should have ratguards fitted to all mooring lines at all times.

Ore Concentrate and Pellet vessels:

I. Advising Arrival: (See also "Arrival Advice") 1. Each vessel operator or its principal shall notify Quebec Cartier Mining at least two weeks prior to the expected arrival of each vessel at Port Cartier and Quebec Cartier Mining Company shall forthwith advise such vessel operator or principal whether it can accept the vessel at such time. An allowance of three days preceding and three days subsequent to the date so fixed will be made for the actual arrival of each vessel. If the vessel's actual arrival is not within such three-day period preceding or subsequent to the date fixed for its arrival, Quebec Cartier Mining Company may fix another arrival date for such vessel that will not interfere with other scheduled loading. Quebec Cartier Mining Company shall be kept fully advised of all vessel nominations, substitutions, cancellations, delays, sailing dates at Port Cartier of all vessels designated to accept delivery of ore at this Port.

2. The submission of a Notice of Readiness by the vessel will constitute acceptance of all terms and conditions of this Advice to Vessels by the vessel, its managers, Agents, Master, operator and or charterer.

II. Loading Conditions: Ships will be loaded in regular turn of vessel's arrival off Port Cartier provided they present with hatches open and do not have ballast pumping time which will exceed minimum loading time. The one shiploader has a rated capacity of 9,000 gross t.p.h. for concentrate and 7,200 gross t.p.h. for pellets. A vessel which has berthed at the loading dock and is found to have a deballasting rate time which in the opinion of the Port Authority will not permit loading at maximum rate, may be ordered off the dock and moved to the standby berth or to anchorage until it is in a condition to accept its cargo at maximum loading speed.

The vessel will then be returned to the ore loading berth in turn, following re-submission of Notice of Readiness. All moves to be at vessel's expense. Quebec Cartier Mining Co., Port Authority will be final arbitrator in case of dispute.

III. Loading Minimum and Vessel Specifications: Each vessel designated to accept delivery of ore at Port Cartier, must conform in construction to the following specifications and conditions:–

1. Not less than 4 ore hatches of at least 18 ft. square, except Great Lake Bulk carriers where the minimum width of hatches shall be 9 ft., to accept Ore Cargo direct from loading tower at Port Cartier.

2. All vessels nominated must be suitable for the loading and the transportation of concentrates or pellets and capable of taking the entire cargo to be loaded in the lower holds without "peak-up" above the tween deck levels. The vessel shall load and stow cargo in accordance with the Canada Shipping Act and Regulations.

3. Hatch opening sufficiently clear of obstruction on deck to permit free and direct contact with loading tower.

4. Vessels may be loaded to a draft of 54 ft. if tides permit them to sail while maintaining a safe under keel clearance (at least 3 ft.) on a rising tide.

If a vessel requests to wait for a following higher tide in order to lift more cargo, and the Port Authority agrees, then this additional time is not to count and, if required by the current operational condition of the Port shifting is necessary, all additional shifting fees will be for the account of the vessel.

IV. Special Regulations: 1. Any vessel which discharges a cargo of Grain and is to load a cargo of Iron Ore will be considered in turn for loading only after the vessel has completed discharging Grain and is in all respects clean and ready to receive Iron Ore.

2. Loading plan must be presented to the loading foreman on arrival at the berth.

3. All shipboard work necessary for docking and loading, including but not limited to line handling and tending, opening and closing hatches, and normal deck cleanup, shall be done by the vessel's crew.

4. Any owner or charterer with more than one vessel waiting turn to load may interchange his vessels, provided they are of comparable capacity (deadweight). Any interchange of turn must be arranged with and have the approval of Quebec Cartier Mining Company.

5. All weights shown on the Bill of Lading and or Manifest will be the same as recorded on the weighing facilities of Quebec Cartier Mining Company.

6. The Port will be in operation 24 hours a day, 7 days a week; however, ore vessels will not be loaded on New Year's Day (January 1st), and on Christmas Day (December 25th), nor will they be loaded from 0800 hrs. Sunday to 1600 hrs. Sunday, nor during the same period on the following holidays: Good Friday; St. Jean Baptiste Day – June 24th; Dominion Day – July 1st; second Monday of July; first Monday of August; Labour Day – first Monday of September; Thanksgiving – second Monday of October; Boxing Day – December 26th.

7. Arrangements have been made so that loading operations will commence as soon as possible after the vessel's arrival at the loading berth.

8. Vessels usually dock Port Side to at Ore Berth.

V. General Instructions in Preparing Vessels' Holds to Accept Iron Ore Concentrate: Quebec Cartier's Iron Ore is a type of Iron Ore Concentrate which weighs on the average 192 lbs. per cu.ft., and stows at approximately 12/13 cu.ft. per gross ton.

The Iron Ore contains an average moisture content from 2.5% to 3.5%, and could sometimes in the Summer Season be shipped at as high as 5%. The character of this Ore is self draining. It will retain moisture up to about 2.5%, but all moisture over and above this will drain on compaction of the material, and also, if the Ore is left for long periods in Stock-pile or in the hold of a vessel, this drainage of moisture will sometimes leave a considerable quantity of water in the hold of the vessel, and could cause some inconvenience when discharging the cargo. For this reason all Bilge Strums or Wells should be sounded regularly and pumped out at regular intervals, so as to keep the bottom of the hold as dry as possible.

Quebec Cartier's Iron Ore is considerably abrasive, and could cause damage to Bilge Pumps. Masters of vessels are advised to cover all Bilge Strums or Wells with Burlap in a similar manner as when receiving a Grain Cargo in Bulk; so as to permit a free flow of the water and retain the Iron Ore in the hold of the vessel.

All holds for the acceptance of this cargo should be clean prior to the arrival of the vessel.

VI. Pellet Stowage Factor: Iron Ore pellets will stow at about 17/18 cu.ft. per gross ton.

All holds for the acceptance of this cargo should be clean prior to the arrival of the vessel.

Grain Vessels: Berthing and use of the Elevator Dock Facilities: *Regulations, Terms and Conditions:*

(The term 'Tariff' refers to the Tariff issued periodically by the Elevator Company; the term 'Company' in this section refers to the Elevator Company).

1. *Application for Berth:* All vessels, their owners, managers, Agents, Master, operators or charterers, desiring a berth at the Elevator, shall file application for loading berth at the Elevator office between 0900–1700 hrs. Mondays through Fridays and from 0900–1200 hrs. on Saturdays, except on holidays as defined in Item 7 of Subsection II A of the Tariff. Application shall be made in writing on forms supplied by the Company. Notwithstanding such application form, each owner, manager, Agent, Master, operator, or charterer, or other duly authorized representative of the vessel agrees that in consideration of the berthing of such vessel, *there will be delivered to the Company signed written evidence of the receipt on board of the grain or other commodity/ies according to the Company's description and tally.* Such berthing shall also evidence agreement to pay in full, as per invoice, for all services rendered to the vessel and agreement to be governed by all rates, rules and regulations contained in the Tariff as interpreted by the Company, all such charges constituting a lien against the vessel until paid. Such application shall be dated and timed. Upon acceptance by the Company this application shall constitute a contract between the Company and the owners, managers, Agents, Master, operators, and/or charterers to accept and comply with all the charges, rules and regulations set out in the Tariff.

2. *Allocation of Loading Berth:* Except as otherwise provided in these regulations, vessels shall be assigned a loading berth in the chronological order in which they file with the elevator office the signed application for berth, accompanied at the time of filing by the following documents:

(a) Certificate issued by the Canadian Government Department of Agriculture and/or by the United States Department of Agriculture, Grain Division, as the case may be, that all cargo holds are fit to load in compliance with the regulations of the respective departments.

(b) Certificate of Readiness in all compartments issued by the Port Warden.

(c) Evidence to the effect that the vessel has been entered at the Canadian Customs House.

(d) Evidence to the effect that the vessel has been tendered to and accepted by the Charterer.

3. *Unloading Vessels Application for Berth:* Subject to the exceptions contained herein, but at all times in accordance with the provisions of the Canada Grain Act and Canadian Grain Commission Regulations, vessels shall be assigned to an unloading berth in the order in which they arrive in port and file application and required documents for berth with the Company with evidence of vessel's readiness to discharge.

(a) A hold of a vessel having been partially unloaded at another port shall not be accepted for unloading.

(b) A hold of a vessel having a separation between more than one grade or kind of grain shall not be accepted for unloading.

4. *Berthing Prior to Receipt by the Company of Appropriate Certification:*

(a) At the sole discretion of the Company, a vessel may be allowed to berth alongside the Elevator prior to having received all the above certificates (as per above items 1 and 2). If subsequently, the vessel fails to deliver such certification, it must, immediately on order of the Company vacate the berth. Nothing contained in this rule shall be deemed a waiver of any of the provisions of Item 5 hereinafter.

(b) Any vessel, which has been allowed to berth at the Elevator having previously filed all the certificates enumerated in above item 2, and which subsequently is found by an Official Inspector unsuitable to receive grain or other commodity for any reason, must, if required by the Company, immediately vacate the Elevator berth. Nothing contained in this rule shall be deemed a waiver of any of the provisions of Item 5 hereinafter.

5. *Refusal or Failure to Vacate Berth:* Any vessel which fails or refuses to vacate the berth when required by the Company, except as provided hereinafter (see "Completion of Loading" Item 11) shall be assessed, in addition to any other charges due hereunder, an automatic charge of $500.00 per hour or any part thereof after vacating notice has been given in writing to the owner, manager, Agent, Master, Mate, operator or charterer of the vessel. This charge shall be paid promptly and it is accepted that it accurately represents a minimum estimate of damages to the Company because of refusal or failure of the vessel to vacate. This payment shall not constitute a waiver on the part of the Company to claim greater actual damages that may be sustained as a result of the vessel's failure to vacate.

The Company, itself or through the Port Authority, shall have the right, authority and privilege to compel the removal of the vessel, by any lawful means, at the vessel's own risk and expense and shall not be liable for any damages, delay or other expenses, including legal costs, arising from the act of removal of the vessel, by whomsoever incurred.

6. *Berth Operations:* The Company, in its sole discretion, may:

(a) Alter the turn of vessels whether in berth or not, when confronted by an urgent need to receive or ship a particular grade or kind of grain or other commodities, or when in its judgment

(i) This is necessary or desirable in order to facilitate elevator operation, or

(ii) Conditions within the Elevator or approaches thereto by water or land render this necessary or desirable.

(b) Require a vessel to load in overtime hours at vessel's own expense during all hours when labour can be available, continuously until loading is completed, or for any part of such hours as the Company may determine necessary. This rule may be applied whenever more vessels are in port than can be berthed at the Elevator, or in order to expedite the movement of vessels and/or grain, and/or other commodities, or to ensure the fullest possible use of the Elevator, or to eliminate any threat of actual or possible congestion of any other vessels. Any vessel unwilling to work overtime as directed in accordance with this rule shall vacate the berth without delay and the vacating vessel shall only be permitted to berth again at the Elevator after giving written agreement to load continuously until completed whether in regular or in overtime hours. Should any vessel refuse to vacate, it will be liable for damages described in above Item 5.

(c) If a strike or other labour disturbance involving a vessel at berth or waiting for berth (whether by vessel's crew or otherwise) will, in the Company's judgment, tie up or impede operations at the dock, it may order such vessel out of berth or refuse to accept it at the berth. Should any vessel refuse to vacate, it will be liable for damages described in above Item 5.

7. *Liner Preference:* In assigning berth, as per above Item 2, to vessel at the Elevator, the Company may, in its sole discretion, accord preference to liner vessel, except that no vessel which is occupying the berth(s) and is willing to work unlimited overtime at its own expense until completed, shall be required to leave the berth(s) in favour of liner vessel. Liners accorded such priority berth(s) shall work unlimited overtime at their own expense until completed, if so required by the Company.

To be considered for a priority berth, liner vessels shall be required to file application as per above Item 1 before 1600 hrs. on weekdays, or before 1200 hrs. on Saturdays (Holidays are excluded) and they may then be given priority 24 hours thereafter for the first available berth.

A liner vessel may not be eligible for priority over a non-liner vessel which has filed for berth and on which 4 running days have elapsed since filing, said running days to commence at 0700 hrs. on the day following the date of filing. For the purpose of eligibility as a liner, a vessel must meet both following requirements:

(i) The vessel is sailing under an advertised schedule and operated by a line maintaining regular sailings from any Great Lakes, St. Lawrence River, Canadian or U.S. Atlantic port or ports, and,

(ii) The total quantity of all grain loaded and/or to be loaded shall not exceed one half of the total deadweight tonnage of the vessel.

8. *Loading Port Cargoes:* In order to facilitate Elevator operation at full capacity, vessels loading part cargoes, other than liners, will, if considered advisable by the Company, yield turn for berth to vessels loading full cargoes. However, permission for regular turn may be requested by the shipper of a part cargo at least 1 week prior to expected date of vessel's arrival which permission will be granted if, in the judgment of the Company, congestion is unlikely. Vessel will not lose more than 3 weather working days on turn as a result of this clause.

9. *Vessel in Berth:* Any vessel in berth shall at all times maintain appropriate officers and crew aboard to permit shifting of the vessel or reception or discharge of cargo at any time of day or night including Saturdays, Sundays and Holidays.

All vessels discharging or loading grain or other commodities will at all times have adequate rat guards on all mooring lines.

10. *Work Interruptions:* When work is interrupted on account of rainy or other weather conditions, a vessel at its own expense may be required, at the discretion of the Company, to retain on standby, according to local labour rules, stevedore and other labour necessary to the loading, up to a maximum of 2 hours in any stevedoring work period, excepting those work periods which begin at midnight and 0100 hrs. For the midnight work period a vessel at its own expense may be requested to stand by a maximum of 6 hours and for the 0100 hrs. work period, a maximum of 4 hours. Any vessel or its Agent failing to have such labour available, if so

required, shall be, in addition to any other charges due hereunder, assessed a charge of $500.00 per hour for any period where work is subsequently ordered resumed by proper authority (after the weather interruption) but cannot be carried out for lack of labour.

If such interruption occurs during an overtime period or on Saturdays, Sundays or Holidays, the usual charges for overtime periods as per Item 7 of Subsection II A of the Tariff will still be fully assessable and due in addition to the above charge. This rule shall be applicable unless otherwise agreed upon by the Company in writing.

11. *Completion of Loading:* Upon completion of loading, a vessel shall not occupy the loading berth at the Elevator longer than is necessary to close the hatches. Vessels requiring to set booms and derricks before making ready for sea may request written permission from the Company to do this work at the Elevator berth, but it shall be at the sole discretion of the Company whether such permission is granted or not. Any vessel not granted such permission must vacate the berth immediately as required by the Company.

Failure to comply with this requirement will automatically cause the vessel or its agents to be assessed an extra charge of $500.00 per hour or part thereof from the time that permission was refused. This charge shall not impair the right of the Company to compel removal of the vessel from the berth nor shall it constitute a waiver on the part of the Company to claim any greater damages that may be sustained as a result of vessel's failure to vacate. The Company shall have the right, authority and privilege to compel the removal of the vessel by any lawful means at the vessel's own risk and expense and the Company shall not be liable for any damages, delay or other expenses including legal costs, arising from the act of removal of the vessel, by whomsoever incurred.

Loading and Unloading Facilities: Maximum dimensions allowable under Grain Berth:

LOA	900 ft.
Beam	137 ft. for self trimming bulk carriers 137 ft. OBO centre holds only 125 ft. Tankers providing off shore tank are a minimum opening of 15 ft. inside ship's side
Draft	49 ft. loaded
Air draft	LW 53 ft. to top of hatch covers HW 45 ft. to top of hatch covers

Vessels are required to present alongside the loading berth with hatches open and gangway ready.

On completion of loading, vessels are required by the Elevator Company to vacate the loading berth within 1 hour. If additional time is required alongside the loading berth application for an extension must be made at time of docking.

Note: Most vessels requiring additional dock time will be ordered to a lay-by berth, if available, or to anchorage at their expense.

REGULATIONS: Also see "General".

1. Ships will leave the loading or discharging berth immediately on completion of loading or discharging. If any delays occur on documentation, crew members missing etc., ship will leave the dock and all matters will be handled from anchorage or another berth.

2. Vessels ordered to anchor, should do so in the recommended, area see "Anchorage". Failure to do so may result in delays to vessels from being boarded by Port and Government Authorities.

3. Vessels arriving in ballast should ensure they are in good trim for safe handling into the harbour, bearing in mind the loading rate, so as not to cause any delay in loading due to deballasting. However should a vessel not be sufficiently ballasted at the time of proceeding into the harbour the Pilot may request further ballasting, depending on the prevailing weather conditions. If in doubt the Master should contact the Port Office by Radio Telephone.

4. Vessels should have main engines and deck machinery operable at all times when alongside the berth. Permission contrary to the above must be obtained from the Port Authority.

5. Vessels having discharged Petroleum Products at last port and not in possession of a valid Gas Free Certificate by an independent chemist will advise accordingly in the 72 hour ETA, and arrangements will be made to have a chemist available on arrival at vessel's expense. Masters must present a valid Gas Free Certificate before Notice of Readiness may be tendered.

6. Normally, vessels will be permitted entry to the harbour, to their assigned berth in order of their arrival. However, the Port Authority may alter the order to assure in its sole opinion, efficient operation of the harbour. The Port Authorities shall be the final arbitrator in case of dispute.

7. The Port Authority may require a vessel to vacate an assigned berth, proceed to anchor or standby berth and return to the assigned berth to complete loading or discharging as soon as conditions permit.

AGENT: Quebec Cartier Mining Company, Port Office, PO Box 188, Port Cartier, P.Q. Canada. Tel. (418) 768-2485. Telex: 051-8-6422.

PORT COLBORNE, Ontario: 42.52 N. 79.15 W.

Refer to "St. Lawrence Seaway" for important general information.

DOCUMENTS: All documentation carried out by Authorities in Montreal. Only when vessels have called at United States port after departing Montreal will any changes in documentation be necessary, which will consist of a United States Customs Clearance Certificate, to be available on board.

Immigration papers.
1 copy QS2 (Health Certificate).
3 Stores Lists.
Crew Personal Effects List.
Customs Clearance.

All of the above will have been stamped in Montreal.

PILOTAGE: Compulsory for ocean vessels over 250 tons gross. Pilots are available at Port Weller (upbound) and Sarnia (downbound). Supervisor of Pilots located in St. Catharines.

ANCHORAGE: In Lake Erie, beyond the 3-mile fairway buoy at entrance to Port Colborne Harbour.

No anchorage available outside those allocated by the St. Lawrence Seaway Authority, except those vessels waiting to unload at N.H.B. facilities only can moor temporarily on the inner breakwater West of the N.H.B. elevator with permission from the N.H.B. elevator manager.

RESTRICTIONS: Navigation season approximately from April 1st to December 31st. Channel depth 27 ft. dependent on Lake level.

Limiting depth in the channel from Port Colborne piers to Bridge 21 and 20 is 9.14 m. (30 ft.). From Bridge 21 and 20 north to Rameys Bend the limiting depth in the channel is 8.23 m. (27 ft.). The Welland Canal will accommodate vessels not exceeding 222.5 m. (730 ft.) in overall length and 23.16 m. (76 ft.) in extreme breadth. Permissible draft is 7.92 m. (26 ft.).

MAX. SIZE: 730 ft. length, 75 ft. 6 in. beam, 26 ft. draft.

HEALTH: Pratique granted at Montreal.

TUGS: None available.

BERTHING:

Rameys Bend, Wharf No. 12:	
Type	Stone and Sand
Equipment	Tunnel and Belt Conveyor, Loading
Length	1,797 ft. (547.7 m.)
Depth	27 ft. (8.23 m.)
Robin Hood Dock, Wharf No. 13:	
Type	Elevator – Grain and Grain Products
Length	1,000 ft. (304.8 m.)
Depth	26 ft. (7.92 m.)
R.E. Law Dock, Wharf No. 14:	
Type	Stone
Equipment	1 Belt Conveyor Loading only
Length	700 ft. (213.4 m.)
Depth	26 ft. (7.92 m.)
Storage: Capacity	15,000 tons stone.
Wharf No. 15:	
Type	Sand
Equipment	Self-unloaders
Length	850 ft. (259.1 m.)
Depth	14 ft. (4.27 m.)
Rochester & Pittsburg Coal Company, Wharf No. 16:	
Type	Stone and Marine Diesel Oil
Equipment	1 Belt Conveyor 7 ins. – 8 ins. Pipe-line
Length	1,480 ft. (451.1 m.)
Depth	30 ft. (9.14 m.)
Storage: Capacity	30,000 tons above.
Canadian Furnace, Wharf No. 17:	
Type	Unloads Ore and Limestone, Loads Pig Iron and Scrap
Equipment	2 – 5 tons McMyler Bridges
Length	1,120 ft. (341.4 m.)
Depth	30 ft. (9.14 m.)
Storage: Capacity	250,000 tons.
Fueling Wharves, Wharf No. 18:	
Type	Marine Diesel Fuel, Coal
Length	1,650 ft. (502.9 m.)
Depth	30 ft. (9.14 m.)
Storage: Capacity	170,000 Barrels.
Maple Leaf Mills Ltd., Wharf No. 19:	
Type	Grain Elevator
Length	900 ft. (274.3 m.)
Depth	17 ft. (5.18 m.)
Storage: Capacity	2,250,000 Bushels.
National Harbours Board, Wharf No. 20:	
Type	Grain Elevator
Length	Slip Side 600 ft. (182.9 m.) Holding Side 900 ft. (274.3 m.)
Depth:	Slip Side 15.5 ft. (4.72 m.) Holding Side 19 ft. (5.79 m.)
Storage: Capacity	3,000,000 Bushels.

MEDICAL: Local hospital at Port Colborne. All assistance available.

DENSITY: Fresh water.

FRESH WATER: Available at West Side Wharf.

FUEL: Bunker and diesel fuel available.

REPAIRS: Lay-up berth at West Side Wharf, 9.5 ft. – 13.5 ft. alongside. Local repair shops for boiler, engine and above deck repairs.

DRYDOCK: At Port Weller.

SURVEYORS: Lloyd's at St. Catharines, American Bureau at Toronto.

AUTHORITY: St. Lawrence Seaway Authority, Port Colborne.

PORT DALHOUSIE, Ontario: 43.12 N. 79.16 W.

LOCATION: On the South shore of Lake Ontario 43 km. Southeast of Hamilton and 5 km. West of Port Weller, the Northern entrance of the Welland Canal. Port Dalhousie is now amalgamated with the City of St. Catharines.

APPROACHES: Access to the port is through two parallel entrance piers projecting out into Lake Ontario, which lead into a wide basin with ample berthing space for vessels.

RESTRICTIONS: Navigation season: April 1 to December 30 usually. Channel depth: Limiting depth in the channel between the entrance piers in the harbour undetermined.

RADIO: Ship-to-Shore communications: Through Toronto (VBG).

TUGS: No towing facilities.

BERTHING: The entrance to the harbour is between two parallel concrete piers 61.0 (200 ft.) apart. The East pier 701.1 m. (2,300 ft.) in length, extends out 457.3 m. (1,500 ft.) from the shore, 76.2 m. (250 ft.) beyond the outer end of the West Pier. Southward of the inner end of the entrance piers, the harbour widens out and a central pier divides it into two parts, namely: Lock No. 1 of the Second Welland Canal (now out of use) is on the West side, and Lock No. 1 of the Third Welland Canal (now out of use) is on the East side of the inner part of the harbour.

(1) A section of the West harbour wall, 45.7 m. (150 ft.) approximately in length, may be used for tie-up or mooring purposes. The remaining 72.2 m. (237 ft.) is in use by Henry's Boat Works.

(2) A section of the Southerly end of the East harbour pier 193.6 m. (635 ft.) in length, is used for sand storage. The Northerly 27.4 m. (90 ft.) is in use by Anthony Derose Ltd., and the central 56.4 m. (185 ft.) is in use by the Holden Sand & Gravel Co. Ltd., and the Southerly 79.3 m. (260 ft.) is in use by Transit Mix Concrete Co.

(3) A section of the Easterly harbour wall 112.8 m. (370 ft.) in length, can be used for coal and sand storage. The Northerly 61.0 m. (200 ft.) is in use by Transit Mix Concrete Co., and the Southerly 51.8 m. (170 ft.) is in use by Moore-McCleary Ltd.

(4) A section of the centre pier, 90.0 m.(295 ft.) in length is used for sand storage, the Northerly 38.1 m. (125 ft.) being in use by the National Sand & Materials Co., and the Southerly 51.8 m. (170 ft.) in use by Jones-Lockhart Ltd.

MEDICAL: General Hospital and Hotel Dieu at St. Catharines.

CUSTOMS: Officers available at St. Catharines at any hour by previous arrangement.

FUEL: Not available.

SERVICES: Supplies available.

SURVEYORS: Lloyds at St. Catharine, ABS at Toronto.

AUTHORITY: St. Lawrence Seaway Authority.

PORT HAWKESBURY AND STRAIT OF CANSO, N.S. (See Plan Book)

PORT LIMITS: Port Hawkesbury and Mulgrave harbour limits are from a line joining Melford Point and Bear Head, and the Canso Causeway.

DOCUMENTS:

3 copies Crew Declaration, Form Y14 (IMCO Form 5 acceptable).
3 copies Store List, Form E1.
3 copies Immigration Crew List, Form IMM200.
3 copies Inward Report, Form A6.
2 copies Shipping Report, Form S1.
3 copies Outward Report, Form A6.
Completed Maritime Declaration of Health, Form QS2001.
Valid Derating Certificate.
International Vaccination Certificates for crew members.
Complete copy of Manifest for Goods to be Discharged in Canada.
Clearance from Last Port.

Tankers must be in possession of Canadian Compliance Certificate, valid for 2 years, or have arrangements made to receive one.

ICE: Ice Advisory and Shipping support Service is provided from mid-December to the end of the ice season. Information regarding ice conditions is broadcast regularly and special reports will be obtained on request from "Ice Halifax" through Halifax Radio (VCS).

Local reports are included in a routine information broadcast on VHF by "Eddy Point Traffic" at half hourly intervals.

Masters are cautioned that it may be necessary to remove certain buoys in Chedabucto Bay and the Strait of Canso during the ice season, and it is recommended that Masters request information on their deposition from "Eddy Point Traffic" prior to entering the Canso Marine Traffic Regulating Zone.

PILOTAGE: Pilotage is compulsory. Pilotage boarding stations:

Strait of Canso, Northern Approach:	45° 42′ 42″ N.
	61° 29′ 12″ W.
Strait of Canso, Southern Approach:	45° 24′ 00″ N.
	61° 01′ 00″ W.

Vessels must report by radio-telephone or radio-telegraph their ETA's to the Eddy Point Marine Aids Centre, 12 hours before the vessel's ETA. Time used must be GMT. ETA's must be confirmed or corrected not more than 8 hours later nor less than 4 hours prior to the new ETA.

Canso pilot boat guards Channel 14 whilst in the area of Chedabucto Bay approach and Channel 12 whilst in the area of St. George's Bay approach.

ANCHORAGES: In the interests of safe navigation, anchorage berths for vessels of 65 ft. registered length have been established.

Anchorages "A" to "F" are situated in Chedabucto Bay in water depths from 14 to 26 fathoms.

Anchorages "G" to "O" are situated in Inhabitants Bay in water depths from 5 to 8 fathoms.

HEALTH: Pratique will be granted on arrival at berth by boarding officers, but it is the Master's responsibility to report by radio all details of any sickness or death occurring during the voyage to "Quarantine Halifax".

MAX. SIZE: Tankers of 326,000 d.w.t. and larger can be accommodated at the Gulf Canada Ltd., Ocean Terminal. See also "Berthing".

RADIO: Halifax (VCS) continuous year round. 500, A2; 2,182, A3; 156.8; F3 also 4, 6, 8, 12, 16, 22 mHz bands.

Sydney (VCO) continuous year round. 500, A2; 2,182 A3, 156.8, F3.

Canso (VAX) continuous year round. 2,182, A3; 156.8, F3.

Grindstone, Magdalien Island (VCN) continuous year round. 500, A2; 2,182, A3; 156.8 F3.

Canso Locks (VAZ3) continuous during navigation season. 2,182, A3; 156.8, F3.

TUGS: Two tugs of 3,400 b.p.h. and 40-ton bollard pull operate in the area, these tugs are under contract to Gulf Canada Limited and are available, operational conditions at their Ocean Terminal permitting, for use at other berths in the port subject to the terms of the United Kingdom Standard Towage conditions.

BERTHING: *Gulf Canada Ltd., Ocean Terminal, Point Tupper:* Masters are required to establish communications with the terminal when within a distance of 35 miles of the terminal on VHF Channel 16, using call-sign "Gulf Control".

Situated at Wright Point and is a "T"-shaped structure providing 2 berths for tankers. Outer berth No. 1, has accommodated vessels up to 357,000 d.w.t. and has a least depth of 100 ft., inner berth No. 2 can accommodate vessels up to 50,000 d.w.t. with a least depth of 75 ft.

Berth No. 1 is equipped with 8 hydraulically operated loading arms, each fitted with a speed-seal hydraulically operated manifold coupling.

Loading arm	*Coupling*	*Purpose*	*Rate*
11	16 in.	Mammoth tanker ballasting	25,000 b.p.h.
12	10 in.	Vessel bunker	10,000 b.p.h.
		Cargo bunker	10,000 b.p.h.
13	16 in.	Cargo bunker	25,000 b.p.h.
		Crude	25,000 b.p.h.
		Ballast discharge	25,000 b.p.h.
14	16 in.	Crude	25,000 b.p.h.
15	16 in.	Crude	25,000 b.p.h.
16	As No. 13		
17	As No. 12		
18	As No. 11		

Berth No. 1 is connected by 2–42 in. lines to the crude tank farm with an average pumping distance of 7,750 ft., tank base being at an elevation of 90 ft. No booster pumps are provided.

Berth No. 2 is equipped with 6 hydraulically operated loading arms each fitted with a speed seal hydraulically operated manifold coupling.

Loading arm	*Coupling*	*Purpose*	*Rate*
1	8 in.	Vessel bunker	2,500 b.p.h.
2	12 in.	Cargo bunker	12,000 b.p.h.
		Ballast discharge	25,000 b.p.h.
3	12 in.	As No. 2	
4	10 in.	Premium gasoline	10,000 b.p.h.
		Regular gasoline	10,000 b.p.h.
5		Naphtha	10,000 b.p.h.
5	10 in.	Stove oil	10,000 b.p.h.
		D-40	10,000 b.p.h.
		D-20X	10,000 b.p.h.
		D-25	10,000 b.p.h.
		Jet	10,000 b.p.h.
6	8 in.	Vessel bunker	2,500 b.p.h.

Product tanks are situated 3,920 ft. for bunker to 6,400 ft. for gasolines from the berth.

Vessels will be expected to berth with manifold blinds removed, sea valves sealed and locked, pumps and pipe-lines set ready to commence discharge of cargo or ballast immediately on connection of loading arms and on verification of the discharging/loading procedure between the Master or his delegate and the terminal's representative.

On termination of the cargo transfer, the vessel will be required to vacate the berth, if loading, on the completion of gauging, sampling and documentation; if discharging upon ballasting to a draft consistent with the weather conditions prevailing.

Suitably equipped vessels will be able to maintain VHF radio communication with the terminal control room during the cargo operation.

Fresh water and fuel are available for calling tankers on both berths.

A gangway will be provided on berth No. 1, but will require the assistance of ship's personnel in positioning the ladder, only in instances when the ship's superstructure or other obstruction prevent the use of the terminal's gangway should arrangements be made to use the ship's gangway.

Nova Scotia Forest Industries Wharf. Situated at Madden Point and serves the pulp and paper manufacturing facility, the wharf is 425 ft. long, with dolphins extending a farther 100 ft. from each end of the wharf, depth alongside 26 ft. at LW. Fresh water available, bunkers not available.

Georgia Pacific Corporation Terminal. Situated at Point Tupper, this gypsum loading facility consists of a series of dolphins capable of mooring a ship over 700 ft. in length and has a min. depth of 32 ft. LW. Conveyor system from plant to centre of dolphins. No fuel oil or fresh water available.

Port Hawkesbury Department of Transport Wharf. Berthing length 50 ft., depth of water alongside 18 ft. No fresh water, no bunkers.

Mulgrave Department of Transport Wharf. Berthing length 940 ft., depth of water 18 to 25 ft. Used for wood pulp and general cargo loading/discharging rail tracks, fresh water available, fuel oil delivered by truck, no cranes or permanent hoist.

BALLAST: *Gulf Canada Ltd.:* Ballast facilities only available to calling tankers. All ballast must be pumped ashore. Ballast receiving facilities are situated 5,250 ft. from the berths. Disposal of ballast water overside is strictly prohibited and any pollution of the Strait will result in heavy claims and fines. The terminal will in the case of an oil spill take such steps as may be deemed necessary to fight the pollution before it spreads. If the spill is due to faulty equipment or material on the vessel or to negligence on the part of the ship's personnel, the terminal shall be indemnified for any expense incurred in connection with the preventative action taken. No ballast is to be taken from the Strait unless required for the ship's clean permanent ballast system. Clean ballast for the cargo tanks will be by terminal pumps.

MEDICAL: Masters are required to give early advice to their Agent regarding medical and dental attention requirements, hospitalisation cases will be referred, Antigonish, 40 miles distant.

DENSITY: 1025. Influenced by Spring thaw run-off.

FRESH WATER: Available in limited quantities.

FUEL: Available at Gulf Canada Ocean Terminal for calling tankers only. Vessels requested to give 72 hours notice of requirement, quantity and specification.

CONSULS: See "Halifax".

REPAIRS: Breton Industrial and Marine perform hull and machinery repairs to vessels afloat. Radio and radar service is available locally, the vessel's Agent should receive early advice of repair requirements.

GANGWAY/DECK WATCHMEN: Usually ship's crew.

CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes or 50 cigars or 2 lb. tobacco per person per week. Wines/spirits: Total of 40 ounces per person over 21 years old.

Subsequent issues may be authorised to crew members of foreign vessels, but the max. quantity any crew member may hold at any time must not exceed 300 cigarettes, or 75 cigars, or 3 pounds of tobacco and 60 ounces wines/spirits.

Crew personal effects such as radios, tape recorders, binoculars, etc., should be declared on manifest.

REPATRIATION: Crew changes and repatriation permitted.

AIRPORT: Regular services by Air Canada from Halifax International Airport 150 miles distance, and from Sydney Airport 90 miles distant. Charter flights by small aircraft can be arranged from Port Hawkesbury Airport to Halifax and Sydney.

SUPPLIES: Provisions and bonded stores can be supplied locally but Masters are advised that to avoid delays, their Agent should be notified prior to arrival on their requirements, particularly for deck and engine stores as these may have to be obtained from Halifax.

Laundry facilities are available and in order to expedite the service, Masters should request their Agent to have a representative to attend on arrival.

Supplies of stores will have to be conveyed to tankers at Gulf's Ocean Terminal by stores boat or barge.

TIME: GMT minus 4 hours. Last Sunday in April, clocks advanced 1 hour, last Sunday in October, clocks retarded 1 hour.

POLICE/AMBULANCE/FIRE: Police 625-2220; Ambulance 625-2929 or 625-1911; Fire 625-2838.

SHORE LEAVE: Permitted.

CANSO CAUSEWAY CANAL: Max. vessel dimensions, length 715 ft., width 75 ft., draft 28 ft., vessels with draft greater than 28 ft. and not more than 30 ft. may proceed through with special permission of the Canal Superintendent. Depth of water on the North and South approach mooring berth is 32 ft. During the months December to April Masters should consult with Ice Operations, Halifax, whether lock in operation.

VESSEL TRAFFIC MANAGEMENT:

Vessel Traffic Management (VTM) and information systems for Strait of Canso and approaches:

Eddy Point VTM Centre:

In the interests of safe navigation within the area of the Strait of Canso and approaches, the Canadian Coast Guard has established a VTM Centre at Eddy Point in Latitude 45° 30′ 52.1″ N., and Longitude 61° 15′ 15″ W. The VTM Centre is equipped with VHF, MF and RT transmitting and receiving communications equipment and radar. The VTM Centre administers a VTM system in the Strait of Canso and approaches and is manned on a 24-hour basis.

Canso VTM Zone:

Masters of ships of 20 m. (65.6 ft.) or more, in registered length, entering the Canso Zone are advised that the Canso Zone marine traffic regulations came into effect on January 23rd, 1974. The procedures and requirements outlined in the Canso Zone Regulations are to be adhered to during the transit of ships within the limits of the zone.

Eastern Limit:

A line joining the following geographical positions:

(i) 45° 18′ 20″ N., 60° 56′ 21″ W.
(ii) 45° 18′ 20″ N., 60° 35′ 06″ W.
(iii) 45° 24′ 28″ N., 60° 29′ 20″ W.
(iv) 45° 38′ 21″ N., 60° 29′ 20″ W.

Western Limit:

A line joining Cape George Lighthouse. Latitude 45° 52′ 27″ N., Longitude 61° 45′ 05″ W., and Port Hood Island Light, Latitude 46° 00′ 51″ N., Longitude 61° 33′ 27″ W.

Application

The provisions of this Notice apply to all vessels of 20 m. (65.6 ft.) registered length and over whilst in transit through the Canso VTM Zone. A ship will be considered in transit at all times whilst located within the Canso Zone except when securely made fast to the shore or laid up to the satisfaction of the VTM Centre.

Traffic Control and Responsibility

There is no intention on the part of the Canadian Coast Guard to attempt to navigate or manoeuvre ships from a shore station and nothing in this Notice overrides the authority of the Master or his responsibility for the safe navigation of the ship. Information passed to the Master is intended to assist him in the safe conduct of his vessel.

Geographic Subdivision of the Canso VTM Zone:

For traffic information and Regulating purposes, the Canso Zone is divided into two sectors as defined in Table 1.

VHF Radiotelephone Equipment

To avoid unnecessary delays, all vessels requiring transit in the Canso Zone should be provided with a VHF set meeting the following standards:

A vertically polarized unity gain antenna at a nominal height of 9.1 m. (30 ft.) above the water, a transmitter RF power output of 10 watts, and a receiver sensitivity of 2 microvolts across the input terminals for 20 dB signal to noise ratio. Control of the VHF Channels shall be immediately available on the bridge, convenient to the conning position and such installation shall conform to the requirements laid down in Radio Regulations for equipment used in the VHF International Maritime Mobile Radiotelephone Service and shall be capable of operating on the following Channels:

156.8 MHz	Channel 16
156.7 MHz	Channel 14
156.6 MHz	Channel 12
156.55 MHz	Channel 11
156.3 MHz	Channel 6

However, it is recommended that the following Channels be also available in case of emergency or an extension of service:

156.65 MHz	Channel 13
156.5 MHz	Channel 10
156.45 MHz	Channel 9
156.4 MHz	Channel 8

The VHF radiotelephone system for VTM is intended exclusively for marine safety information and traffic regulating messages. Public correspondence and domestic messages will not be accepted and should be routed through Canso Marine Radio VAX.

VHF Listening Watch

The VHF Channels contained in Table 1 have been designed for regulating vessel traffic and all vessels whilst in transit of the Canso Zone shall maintain a continuous VHF listening watch on the appropriate assigned sector frequency. Permission to leave the designated frequency or to terminate the VHF listening watch must be obtained from the VTM Centre.

Operating Procedures

The Eddy Point VTM Centre is identified by the name *Eddy Point Traffic* and ships will be addressed by their names.

Radiotelephone procedures are those formulated by the International Telecommunications Union as outlined in the VHF International Maritime Mobile Radiotelephone Service. All times are given in Greenwich Mean Time. The 24-hour clock system is used.

All radiotelephone communications between the Centre and ships are conducted in English and are recorded.

Traffic Clearances (Permission to Proceed)

The Master, Officer-in-Charge or Pilot of the vessel shall obtain a traffic clearance before a vessel:

(a) Enters the waters designated as the Canso VTM Zone;
(b) Proceeds to or leaves any berth within the Canso Zone;
(c) Proceeds into or out of the buoyed Strait of Canso and approaches deep water channel;
(d) Proceeds after being stranded or involved in a collision;
(e) Proceeds after suffering a permanent defect of any shipborne navigational aid or equipment or manoeuvring machinery;

Berth means wharf, pier, lock, anchorage or mooring.

Duration of Traffic Clearance Validity

A VTM clearance constitutes authority for the Master of a ship to proceed with the manoeuvre for which permission has been granted provided the commencement of that manoeuvre has been executed within 15 minutes of the time specified in the clearance. The clearance automatically expires after this time and if the ship is delayed for any reason, it must, except in an emergency, obtain another clearance before proceeding. Should an emergency occur that necessitates action without permission, the VTM Centre must be advised immediately.

Traffic Clearance Requirements

Ships shall make application for clearance in accordance with the Eastern Canada Traffic System (*Ecareg Canada)*

Vessels of 50,000 tons gross tonnage and over shall apply for clearance to the VTM Centre not less than 24 hours before the vessel is due to enter the Canso VTM Zone. All other vessels shall apply for such clearance not less than 12 hours before the vessel is due to enter the Canso VTM Zone.

Vessels of 50,000 tons gross tonnage and over shall apply for clearance to leave a berth within the Canso VTM Zone not less than 4 hours prior to the time of departure.

Vessels at anchor shall be maintained on standby status and be capable of proceeding as required.

Request for Traffic Clearance

Ships of 500 g.r.t. or more requiring a clearance to enter the Canso VTM Zone shall make application through a Coast Guard Radio Station to *Ecareg Canada*. Ships under 500 g.r.t. shall make application through a Coast Guard Radio Station to *Eddy Point Traffic*.

Ships requiring clearance to depart a berth within the Canso VTM Zone shall make application direct to *Eddy Point Traffic*.

Clearance application shall be made in the following format:

(a) Name of ship and call sign;
(b) Name and initials of Master;
(c) Position (and speed, inbound);
(d) As applicable, the estimated time of:
  (i) Entry into the Canso VTM Zone;
  (ii) Departure from a berth within the Canso VTM Zone;
(e) Ship's destination, ETA and intended route through the Eastern Canada Traffic Zone, as applicable;
(f) Last port of call, as applicable;
(g) Draft;
(h) A chart and publication report;
(i) Brief description of main cargo and pollutant cargo or dangerous goods by classification;
(j) Defects, if any, in the ship's hhull, main propulsionn maachinery, steering gear, anchors and cables, radar, compass or VHF radio equipment;
(k) Any limitation in ability to manoeuvre;
(l) Any release of pollutants from the ship or any damage sustained;
(m) Name of Canadian or USA Agent;
(n) Date of Expiry of the non-Canadian Ship's Compliance Certificate for a non-Canadian tanker of 500 g.r.t. or more.

Mandatory Calling-in-Points (C-I-P's)

Vessels preparing to transit and while in transit are to report to the VTM Centre when within 5 nautical miles of the Eastern boundary of Sector I and at the following C-I-P's:

SECTOR I	Buoy C-A
	Buoy C-D
	Buoy C-F
	Buoy 6 C
	Buoy 10 C
	Buoy 14 C
	Buoy 20 C
	Buoy 24 C
SECTOR II	Buoy 14 W

Ship Reports:

Vessels are required to give progress reports when passing the mandatory C-I-P's and such information would normally consist of the following:

(a) Name of vessel;
(b) Location;
(c) Time to next C-I-P (or Zone limit);
(d) Any adverse weather conditions being experienced.

Vessels may give additional navigation safety calls at other locations should conditions so warrant. However, Masters and Pilots are cautioned that conversation should be kept at the minimum consistent with safety requirements of the situation.

Incident Reports:

Ships should report immediately to the VTM Centre any incident involving the following:

(a) An accident to the vessel or fire on board;
(b) Sighting another vessel involved in an accident or any apparent difficulty;
(c) Sighting any obstruction dangerous to navigation;
(d) Observing any navigation buoy or aid that is malfunctioning, damaged, missing, or off position;
(e) Sighting any pollution of the waters within the Canso Zone; and,
(f) An appreciable reduction in visibility.

Ships at Anchor

Ships at anchor within the Canso VTM Zone shall be maintained on standby status and shall be capable of proceeding as required. A VHF listening watch is to be maintained on the appropriate sector frequency.

Information by Request

The VTM Centre will give to any ship on request such information on traffic, weather or other conditions as is known to the Centre.

Restrictions of Traffic Movement

The movement of vessels in transit may be restricted during times when the following vessels are underway:

(a) A tanker of 50,000 tons gross tonnage or over;
(b) A vessel carrying cargo which could prove hazardous to navigation or the environment;
(c) A vessel or tug and tow which is considered to be navigating with difficulty by reason of size, construction or any deficiency in equipment or machinery.

A Notice to Shipping regarding the expected arrival of any of the above vessels will be broadcast by the following marine radio stations:

VCS – Halifax; VAX – Canso; VCO – Sydney; VCN – Grindstone, M.I.

Speed

Vessels shall proceed with care and at such speed that will not endanger persons or property.

The special attention of Masters and Pilots of vessels is drawn to the presence of vessels loading or discharging oil at the Gulf terminal at Wright Point and other vessels loading stores or cargo at designated anchorages.

TABLE 1

Sector	*Limits*	*VHF Channel Assigned*	*Assigned Frequency*
One	From: Eastern Limit of Zone To: Canso Causeway and S.E. Lock Gate	14	156.7 mHz
Two	From: Canso Causeway and S.E. Lock Gate To: Western Limit of Zone	12	156.6 mHz
For docking and undocking within Canso Zone for ship/tug communications in immediate berth vicinity.		6	156.3 mHz
For locking and unlocking communications between ship and Canso lock within immediate vicinity of lock.		11	156.55 mHz

PORT WELLER, Ontario: 43.14 N. 79.13 W.

LOCATION: On the South shore of Lake Ontario, West End. Port Weller is the Northern entrance of the Welland Canal and is 5 km. East of Port Dalhousie.

PILOTAGE: Master of ships requiring pilotage service in the Port Weller-Sarnia area should send a notice of their arrival by radio-telephone so as to avoid any delay in waiting for a Pilot. When Westbound, Master should order a Pilot 4 hours in advance of the ETA at Port Weller through Toronto Radio. When Eastbound, Masters should order a Pilot 4 hours in advance of their ETA at Port Huron light vessel or Rogers City. Both an accommodation ladder and a Jacob's ladder are required to assist Pilots boarding ships at Port Weller.

RESTRICTIONS: Channel depth: Limiting depth at entrance and through the Welland Ship Canal is 8.23 m. (27 ft.). Permissible draft is 7.92 m. (26 ft.). The locks will accommodate vessels not exceeding 222.5 m. (730 ft.) overall length and 23.16 m. (76 ft.) extreme breadth.

Navigation season: April 1 to December 30.

HEALTH: Quarantine service at Quebec, P.Q., for incoming ships from foreign ports.

RADIO: Ship-to-shore communications: Through Toronto (VBG).

TUGS: Available from Port Weller Dry Docks Ltd.

BERTHING: The harbour consists of two embankments projecting out into Lake Ontario and forming the entrance to the Canal and Lock No. 1. (1) A section of the West entrance wall, 392.6 m. (1,288 ft.) in length, with 8.23 m. (27 ft.) of water alongside is used for sand storage. The Southerly 103.6 m. (340 ft.) is in use by Fourum Transport Limited, and the adjacent Northerly 135.6 m. (445 ft.) is in use by St. Lawrence Stevedoring (Western) Ltd. The remaining 153.4 m. (503 ft.) is not in use for cargo handling purposes. (2) Opposite this, on the East side, there is another dock 194.5 m. (638 ft.) leased by Seaway Terminals Co.

MEDICAL: Hospitals at St. Catharines.

REPAIRS/DRYDOCKS: Port Weller Dry Docks Ltd., 222.5 m. (730 ft.) building dock, gate width 24.38 m. (80 ft.); 228.6 m. (750 ft.) graving dock gate width 24.38 m. (80 ft.); depth over sill 9.15 m. (30 ft.). Also 365.8 m. (1,200 ft.) fitting out berth. Complete machine shop in connection; major conversion jobs and all kinds of hull and machinery repairs. Shipyard gantry crane, 45 tons capacity; shearlegs crane, 125 tons capacity; two self-propelled cranes, 15 tons and a 55-ton level luffing gantry crane extending 609.6 m. (2,000 ft.) from the shipbuilding berth to the fitting out berth. Forged finished shafting available from Canada Foundries & Forgings Ltd.

GENERAL: Transportation: All vessels entering the Welland Canal from Lake Ontario, or vessels from Lake Erie to Lake Ontario, via the canal, use this port but no steamship line makes it a regular port of call for discharging or loading freight. Highway connects with St. Catharines, 5.5 km. Holidays: Officials of canal available at all times during navigation season.

AUTHORITY: St. Lawrence Seaway Authority.

POWELL RIVER, B.C.: 49.52 N. 124.33 W.

(See Plan Book)

DOCUMENTS:

Customs Clearance from last port.

Manifest for goods to be off-loaded and "In Transit" cargo tonnage.

Duplicate Pratique for vessels arriving from ports other than U.S. ports.
Cdn. Immigration Crew List, (Imm. 200) required in triplicate.
Passenger List in triplicate.
Seamen's passports and I.D. cards should be available when arriving from sea.
Ship's Certificates.

PILOTAGE: Payment compulsory. Incoming ships take Pilot at Race Rocks, near Victoria. Pilotage District of British Columbia.

ANCHORAGE: No suitable anchorage is available in Powell River area. Vessels usually anchor in English Bay (Vancouver) or various anchorages Vancouver Island.

RESTRICTIONS: No linesmen available between 2359 hrs. and 0700 hrs. Except tankers who berth anytime.

MAX. SIZE: Up to 600 ft. LOA. 32 ft. draft. Tankers up to 615 ft. have berthed for discharging purposes (No. 2).

HEALTH: Duplicate pratique for first port of call. See also "Montreal".

RADAR/VHF: No radar. Pilots are in contact with tugs and mill office using VHF.

TUGS: Two tugs available, to 500 h.p.

BERTHING: Berth No. 1 requires a tug when berthing only. Berth No. 2 Pilot's discretion. Accommodation: Channel depth 30–35 ft. LW. Two private piers; pier A with Berth No. 1, 500 ft. long, depth alongside 30 ft. LW, Berth No. 2, 482 ft. long, depth alongside 35 ft. LW; Berth No. 4, 400 ft. long, Berth No. 5, 130 ft. long, and Berth No. 6, 375 ft. long, depths alongside 30 ft. LW.

Three 10-ton elevators, one 6-ton travelling crane. Dock storage for 10,000 tons. The elevators are used for loading barges only.

STEVEDORES: None. Local longshoremen only. Supercargoes are sent from Vancouver to assist in loading vessels. Longshoremen are members of Papermakers' Union.

MEDICAL: Powell River General Hospital and port doctor available. Complete medical services provided.

TANKERS: Bunker oil supplied by company barges.

FRESH WATER: Unlimited supply, $25.00 connection charge.

FUEL: Fuel oil, diesel, and gasoline available.

GANGWAY/DECK WATCHMEN: On request.

OPENING/CLOSING HATCHES: By crew prior to arrival and departure.

CUSTOMS ALLOWANCES: 300 cigarettes, or 50 cigars, or 1 lb. tobacco on arrival. Issues every 7 days. 60 oz. or 2 cases beer on arrival. Issues every 7 days.

IDENTIFICATION CARDS: Keep available for inspection.

CONSULS: Available at Vancouver, B.C.

AIRPORT: 2 flights per day to Vancouver International Airport. 4 miles from docks. Charter flights available to Vancouver Island on request.

TIME: Pacific Standard Time.

HOLIDAYS: Union Contract. Usual holidays are New Year's Day, Easter Monday, Labour Day and Christmas Day, every second Sunday.

TELEPHONES: Ship's telephone available.

SERVICES: Most services arranged in Vancouver.

SHORE LEAVE: Permitted.

AGENT: Powell River Shipping Services Ltd., Box 74, Powell River B.C. Office, 483-4232.

PRESCOTT, Ontario: 43.44 N. 75.31 W.

(See Plan Book)

For important General Information refer to "St. Lawrence Seaway".

DOCUMENTS: See "Montreal".

PILOTAGE: Arranged through Agents – Montreal.

ANCHORAGE: Seaway Anchorage.

MAX. SIZE: Up to 27 ft. draft.

HEALTH: See "Montreal".

RADIO: Seaway Stations.

BERTHING: *N.H.B. Facilities.*

Berth	*Length (ft.)*	*Depth alongside (ft.)*
Grain Unloading Berth	1,300	27
Grain Loading Berth	930	27
Shed Berth	1,450	27
Salt Dock Berth at Shed	1,450	27
Salt Dock Berth Up-stream Pier	620	27

Grain Facilities: Prescott Elevator, capacity 5,500,000 bushels, 11 spouts available. Loading capacity 80,000 bushels/hour, depending on type of vessel and conditions.

STEVEDORES: Stevedores arranged by Montreal Agents.

MEDICAL: Nearest hospital located at Brockville. Ambulance service available at Prescott.

DENSITY: No tide – seaway density.

FUEL: Arranged with Montreal Agents.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Ship's crew.

CUSTOMS ALLOWANCES: Tobacco: No limit. Wine and/or Spirits: No limit.

IDENTIFICATION CARDS: Not required.

CONSULS: None.

REPAIRS: Small repairs available.

AIRPORT: 125 miles to Montreal – served by regular airlines.

TIME: Eastern Standard Time GMT minus 5 hours. Daylight saving time from last week-end in April to last week-end in October, clocks advanced 1 hour.

HOLIDAYS: See "Montreal". Work can be arranged on holidays.

POLICE/AMBULANCE: Prescott – Police 925-3131; Ambulance 925-4901.

TELEPHONES: Arrangements can be made to place telephones on board.

SHORE LEAVE: Allowed.

AUTHORITY: National Harbours Board.

PRINCE RUPERT, B.C.: 54.19 N. 130.19 W.

DOCUMENTS: See also "Vancouver"
Crew List (Imm. 200) 2 copies.
List of Ship's Stores (E.1) 3 copies at first Canadian Port.
Personal Possession List (Crew Declaration Y.14) 3 copies at first Canadian port.

PILOTAGE: Compulsory. Telegraphic address: "Pilots Victoria" 48 hours notice required. VHF Channels 6, 11 and 16. Pilot boat 60 ft. vessel, black hull. Boarding station one mile radius from Triple Island. Safe sector of approach 060° True through East to 135° True. Heavy weather, North of Lucy Island.

ANCHORAGES: All position centre of 1,800 ft. radius.
1. 065° True 5.9 cables from McIntosh Rk Beacon (approx. position 54° 18.5′ N., 130° 21.63′ W.).
2. 058° True 12.0 cables from McIntosh Rk Beacon (approx. position 54° 18.9′ N., 130° 20.83′ W.).
3. 227° True 12.9 cables from Vigilante Island Pk (approx. position 54° 19.27′ N., 130° 20′ W.)
4. 218.5° True 7.0 cables from Vigilante Island Pk (approx. position 54° 19.6′ N., 130° 19.13′ W.).
5. 078.5° True 5.0 cables from Vigilante Island Pk (approx. position 54° 20.25′ N., 130° 17.55′ W.).

RESTRICTIONS: Nil on Prince Rupert Harbour. Porpoise Harbour, slack water and daylight. Swept to 23 ft, at low water.

MAX. SIZE: Vessels of 630 ft. and 36 ft. draft have entered. Larger vessels can be accommodated. Fairview Terminal has 45 ft. of water at Low Tide with 1,400 ft. dock face.

HEALTH: Prince Rupert is an unorganized port and pratique is granted for this port only. Officials board at berth. Pratique is automatic when vessel has called at ports in Southern mainland. See "Montreal".

RADIO: Prince Rupert Radio VAJ 500, 2182, 1630.

TUGS: Join vessel off berth. Either ship's or tug's lines may be used. No extra charge for tug's lines.

BERTHING:

N.H.B. – Berthing Accommodation:

Berth Name	*Wharf Length (m.)*	*Depth alongside (m.)*	*Shedded*		*Open Space sq. m.*	*Remarks*
			Size	*area net*		
Ocean Dock	151	7.6-10.6	—	—	5,754	Dock Load Limit 4,536 Kg.
Fairview Terminal	427	13.7	—	4,583	185,700	A modern deep sea terminal equipped with a barge loading ramp having a capacity to 120 m/tons. (under construction 1977). Lumber dipping tank, 1,830 m. of rail siding. Truck loading bays and modern warehouses. The Terminal is a General Purpose and Forest Products facility.

Grain Facilities:

Elevator No.	*Capacity in Bushels*	*Loading Galleries at Berths*	*Loading Capacity Bushels per hour*	*Remarks*
Canadian Government Grain Elevator	2,500,000	—	15,000 each shipper Total 75,000	Total of 5 shippers Wharf Length: 305 m. Depth alongside 15.3 m.

Private Facilities:

Berth	*Length (m.)*	*Depth alongside (m.)*	*Shed (m.)*	*Utility and General Remarks*
Northland Dock	140.3	8.2	1 66.4×16.1 1 29.2×15.2	General and containers
Canadian Cellulose Chemical Wharf	12.2	9.2	Nil	Chemical Handling.
Canadian Cellulose		10.6	122×13.1	360 m. suitable for Berthing – Pulp Handling.
Shell Oil	30.5	9.2	6.1×9.15	Fuels – Marine use.
Standard Oil	53.4	10.6	7.3×22.9	Fuels – Marine use.
Gulf Oil	30.5	10.6	9.15×9.15	Fuels – Marine use.
Imperial Oil	64.1	11.3	Nil	Fuels – Marine use.
Delta Food Processors	82.3	8.2	16.1×79.1	Fish Handling Terminal.
Atlin Fisheries	106.5	8.8	91.5×15.2	Fish Handling Terminal
Royal Fisheries	24.4.	6.1	Nil	Fish Handling Terminal.
B.C. Packers Ltd.	73.2	3.1–7.3	39.6×45.7	0.16 sq.Km. terminal
Fairview Terminal	427.0	12.2		development. Bulk, container and general cargo – Forest products handling.

STEVEDORES: Gangs arranged through Agent. Main commodities for export: Grain – loading rate up to 13,000 tons per day. Pulp – 25 tons per gang hour. Lumber – 20,000 FMB per hour – packaged.
MEDICAL: Hospital facilities available.
DENSITY: Variable, 1013 to 1025.
FRESH WATER: Available at all berths.
FUEL: Marine diesel and heavy fuel oil available from tanks or tank car by arrangement. No berths for bunkering ocean-going vessels.
GANGWAY/DECK WATCHMEN: Not required.
OPENING/CLOSING HATCHES: This work is carried out by stevedores except for specially constructed hatches such as McGregor.
CERTIFICATES:

Safety Equipment.
Cargo Ship Certificate.
Safety Radio.
Derat.
Load-line.
Cargo Gear Book and Certificates.

All subject to inspection on arrival.
CUSTOMS ALLOWANCE: Tobacco, 50 cigars and 200 cigarettes and 2 lb. of tobacco. Wine and Spirit, 1 bottle per officer, (40 oz.) and Beer 288 oz. or 24 pts.
CARGO GEAR: Cargo Gear Book to be ready for inspection. At first Canadian Port it is advisable to have derricks lowered on arrival.
IDENTIFICATION CARDS: Not required.
REPAIRS: Minor repairs deck and engine room.
DRY DOCKS: Two small slipways for 150 ft. vessels.
AIRPORT: Two flights daily to Vancouver, B.C. Travelling time to airport about one hour.
TIME: Zone plus eight Pacific Standard Time. Last week in April to last week in October is Summer Time, clocks advanced one hour.
HOLIDAYS: New Year's Day (no work); Good Friday; Easter Monday; Queen's Birthday; Dominion Day; Labour Day (no work); Thanksgiving Day; Remembrance Day; Christmas Day (no work); Boxing Day (no work).
POLICE/AMBULANCE/FIRE: Police tel. 15; Fire tel. 10; Ambulance tel. 10.
TELEPHONE: Placed on board if required.
SERVICES: Compasses adjusted. No tank cleaning equipment or facilities for discharge of tank washings.
SHORE LEAVE: No restrictions.
AUTHORITY: National Harbours Board.

QUEBEC, P.Q.: 46.49 N. 71.12 W. (See Plan Book)

DOCUMENTS:

3 Crew Lists.
3 Passenger Lists (cargo vessels).
8 Passenger Lists (passenger vessels).
3 Ship's Stores Lists.
3 Crew Declarations.
1 Maritime Declaration of Health.
1 Complete Manifest of cargo to be discharged in all Canadian Ports.
5 Manifest for local cargo.

No bills of lading required to Local Authorities.
PILOTAGE: On arrival at Anse-aux-Basques, a ship takes on board a Pilot of the Laurentian Pilotage Authority to bring the ship to Quebec. Pilotage and payment of dues are compulsory. Pilots board inbound vessels at Anse-aux-Basques. The Master of every ship inward bound in the Gulf of the St. Lawrence and destined for ports West of Anse-aux-Basques must report ETA to Pilots Montreal, via Marine Traffic Control on VHF radio Channel 14 or by other means of communication to Seven Islands Radio Station, giving any information Control may require.

A min. notice of 12 hours must be given. This notice must be confirmed 3 hours prior to arrival at the Pilot station.

Note: Pilot boats (2) and Pilot station keep watches on 2182 kc/s. and have VHF facilities, which are only used for local instructions from one to the other.

Pilot boats (2) in operation: Pilot No. 9 Canada and Pilot No. 10 Canada. Hull painted black, white superstructure. Pilot-jack welded on stack – all-steel vessels. Equipment: Radar – echo sounder – radio VHF/all frequencies. A.M. – all frequencies – electric whistle – loud hailer – searchlight.

Pilot station can either be raised by radiotelephone frequency 2182 kc/s. by morse lamp – semaphore – by just blowing the code letter G consecutively or displaying code flag G. Exact location of Pilot station Anse-aux-Basques, on North shore of St. Lawrence river. Lat. 48° 19.2′ N. Long. 69° 24.9′ W. Pilotage ground limits are rectangular distance of 2 miles from the station. In bad weather, pilot boats removed from station to more secure position and pilotage service held up until better conditions. Same procedure applies during severe ice conditions. Any changes regarding pilot boat service obtained through Marine Traffic Control.

Vessels using pilot boarding stations within St. Lawrence River – Seaway – Quebec Harbour – Lakehead, requested provide accommodation ladder. Landing platform of accommodation ladder should be 10 ft. above water.

Vessels arriving Anse-aux-Basques without having previously stated ETA Pilot station 12 hours in advance, or during such time as pilotage service held up for any reason, vessels normally proceed to anchorage off Ile-aux-Basques on Southern side of river, where good anchorage ground can be found. Further instructions will be given to Vessel by Marine Traffic Control or Pilot Station on VHF or 2182 kc/s.
ANCHORAGE: See "Pilotage".

Due to submarine cables and other submarine installations, anchoring in the harbour is prohibited without permission of the Harbour Master. Permission for anchoring is to be obtained through Marine Traffic Control Centre. The official anchorage area extends Southwestward from the fixed blue light on Queen's wharf Lat. 46° 48′ 34″ N., Long. 71° 12′ 12″ W.
RESTRICTIONS: Depth of water in 11 mile dredged channel is 40 ft. to which depth add height of tide which, at times, may give extra 15 ft.
MAX. SIZE: No limit in length and breadth. Draft limited to 44 ft. Winter and 48 ft. in Summer.
HEALTH: Radio pratique obtained through Seven Islands by wireless. In case of reported suspected disease instructions will be given by wireless. When pratique granted, vessel automatically cleared for *all Canadian Ports.*

BERTHING:

Terminal	*Berths No.*	*Berth Length (m.)*	*Depth at LW Below C.D. (m.)*	*Remarks*
N.H.B. Facilities				
Vieux-Port	4	256.0	3.9	Repair and wintering
	5	176.7	5.1	Repair and wintering
	14	182.9	6.7	Coastal trade
	17	213.4	4.3	Coast Guard
	19	189.0	8.8	Coastal trade
	20	341.4	8.2	Coastal trade
Saint-Laurent	18	240.8	10.7	Grain unloading
	22	152.4	7.9	Coast Guard
	25	222.5	10.7	Ocean trade
	26	240.8	11	Ocean trade
Saint-Charles	24	167.6	10	—
	27	293.2	12.2	Ro-Ro berth
	28	277.4	11.9	Grain loading galleries
	29	304.8	10.6	Ocean trade
	30	224.0	10.6	Repair and waiting berth
	31	224.0	10.6	Repair and waiting berth
Anse-Aux-Foulons	100	—	7.5	Ro-Ro berth not completed
	101	198.1	11.3	Ocean trade
	102	134.1	11.3	Ocean trade
	103	210.9	11.3	Ocean trade
	104	210.9	11.3	Ocean trade
	105	195.4	11.3	Container terminal
	106	195.4	11.3	2 portainer cranes 35 t. and 40 t.
	107	173.1	11.3	Liquid bulk
	108	180.1	11.3	Liquid bulk
Battures de Beauport	50	210.3	11.8	Dry and liquid bulk
	51	210.3	12.4	Dry and liquid bulk
	52	211.2	12.4	Dry and liquid bulk
	53	213.0	15.2	Dry and liquid bulk
	54	213.0	15.2	3 travelling gantry cranes
Levis	81	217.7	10	Dry bulk
Private Facilities:				
Aigle D'Or	86	320.0	9.4	Coastal tankers up to 20,000 d.w.t.
	87	457.2	16.4	Ocean tankers up to 180,000 d.w.t.
Irving	109	pontoon	10.6	Petroleum products
Reed Paper	46	250.0	3.0	Forest products
	47	250.0	7.0	
De La Reine Coast Guard	93	73.1	10.6	Coast Guard
	94	108.2	10.6	Coast Guard
	95	112.7	9.4	Coast Guard
	96	71.6	12.1	Coast Guard
	97	94.4	12.1	Coast Guard
	98	99.0	10.6	Coast Guard
Lauzon Davie Ship	70	152.4	8.3	Entrance to Champlain dry dock East side
	71	121.9	7.9	Entrance to Champlain dry dock West side
	72	100.5-60.9	5.0-5.5	Outfitting wharf
	73	167.6	3.8	Outfitting wharf
	74	152.4	4.3	Outfitting wharf
	75	175.2	5.1	Outfitting wharf
	76	182.8	5.7	Outfitting wharf
	77	167.6	5.5	Entrance to Lorne Dry Dock East side
	78	97.5	5.1	Entrance to Lorne Dry Dock West side
Societe Des Traversiers	82	125.0	8.0	Ferrys-Quebec
	92	125.0	8.0	Levis
Davie Brothers	80	76.0	3.0	Repair wharf
Canadian National	83	76.0	5.0	Wharf unutilized

RADIO: Seven Islands: Call sign VCK. Quebec: Call sign VCC.
RADAR/VHF: Port radar service in operation. VHF Marine Traffic Control System in effect for area extending from meridian of Long. passing through Sept-Iles to upper limits of Montreal Harbour.

In order to take advantage of the Traffic Control System and avoid unnecessary delays, all vessels approaching Sept-Iles from seaward should be fitted with VHF set.

Control of VHF Channels shall be immediately available on bridge, convenient to conning position and such installation shall conform to requirements laid down in Radio Regulations for equipment used in VHF International Maritime Mobile Radiotelephone Service and be capable of operation on Channels: 16, 14, 13, 12, 11, 10, 9 and 6.

For vessels not provided with VHF equipment, portable VHF sets will be taken on board by Pilot. Rental charge for this service. Vessels approaching meridian of Long. passing through Sept-Iles from Eastwards should call Channel Quebec on 156.7 (Channel 14) for further instructions.
TUGS: Tugs join vessels in stream and use ship's lines.

4 tugs available, each equipped with radio-telephone. Two tugs of 4,200 h.p.; two tugs of 1,250 h.p.
BULK HANDLING FACILITIES:

See Table below. (Grain Elevator).

Storage capacity – 8,000,000 bushels (240,000 short tons). Served by CN and CP railways.

A marine terminal facility on piers 50, 51 and 52 which include – 3 bridge towers with a loading capacity of 2,000 t.p.h., locomotive cranes to unload gondola cars, a track-mobile to shunt cars and other ground rolling stock to manipulate bulk material on paved pads, and two-way underground conveyor system to handle dry bulk cargoes at a present loading rate of 800 t.p.h. 2,000 ft. of dock frontage with a depth of at least 41 ft. at LT and leased from NHB over 1 million sq. ft. of land and operating 13,500 ft. of trackage on property connected to CNR. Storage capacity of 7 million imperial gallons for any liquid products serviced by 10 in. marine pipe-lines and a 4-in. loading rack.

Container Berths

Anse-aux-Foulons: Direct access to Trans-Canada Highway without crossing the city. A direct rail access to Canadian Pacific Railways. Two container berths, length 1,282 ft., depth 37 ft. at LT, 17 acre area.

Beauport: Direct rail access to Canadian National. One container berth length 700 ft., depth 50 ft. at LT, 28 acre area.

SABB Inc.: One 35-ton portainer, top handlers and fork lifts.

Roll-on/Roll-off Berths: One berth 962 ft.

Storage facilities: shed 27, 42,000 sq. ft.
shed 28, 50,000 sq. ft.
Open area 27, 227,000 sq. ft.

CRANES: 75 mobile cranes up to 200 ton capacity.
STEVEDORES: Dead-line for orders: 1100–1600–2200 hrs. for periods starting 0800–1300–1900 hrs.; 1 hour required before deadline to order gangs.
MEDICAL: No advance notice required for medical attention. Hospital facilities available. Every person who arrives in Canada from country other than United States, Alaska, Greenland, Iceland, Islands of St. Pierre and Miquelon, Bermuda, Cuba, Jamaica, Bahamas, Virgin Islands, Puerto Rico, Panama Canal Zone or Hawaiian Islands, shall furnish evidence of being immune from Smallpox.
TANKERS: Slop discharge facilities available. Eight tanker berths. Depths from 37 ft. to 50 ft. See "Berthing".
DENSITY: Fresh water.
FRESH WATER: Available to all berths, provided directly from the Board's hydrants and hoses to vessels. Rate: St. Charles River piers, 20 t.p.h. Anse-aux-Foulons 50 t.p.h. with 1 line, and 2 lines 100 t.p.h.
FUEL: Available any berth by truck.
FIRE PRECAUTIONS: Only usual precautions; towing wire hanging overboard.
GANGWAY/DECK WATCHMEN: Watchmen at gangway not necessary, but could be obtained.
OPENING/CLOSING HATCHES: McGregor hatches must be opened by crew. All other cases recommended to be done by crew also, but stevedores would also under conditions specified in stevedoring contract.
SHIP'S CERTIFICATES: Load Line, Safety Equipment, Construction, Radio, Passengers, Cargo Gear, Derating.
CUSTOMS ALLOWANCE: Tobacco, 8 ozs. tobacco for 8 days, cigarettes: 1 carton per 8 days. Wine and/or Spirits, 40 ozs. only. Officers and Masters will have additional supply for entertainment daily on request to Customs.

CONSULS:

British Government Office: 500 Grande Allee E.	Tel. 418–525–5187
United States of America: 1 Ste. Genevieve	522–7089
France (Commercial): 500 Grande Allee E.	522–4646
Dominican Republic: 550 23e Rue.	524–1090
France (Consulate), 1110, Des Laurentides	688–0430
Denmark, 880 Ch. Ste. Foy.	681–0708
Belgium: 55 D'Auteuil.	529–1655
Uruguay: 1093 St. Jean.	525–6612
Republic of Germany, 3030 Bl. Ste. Anne.	661–1146
Norway: 2 Nouvelle France.	692–1071
Holland: 71 Ste. Pierre.	692–0660
Mexico: 2040 Terrasse Stuart.	527–1374
Peru: 71 Ste. Pierre.	692–0616
Haiti: 967 Bar-le-Duc	651–2360
Spain: 777 1e Av.	525–5111
Italy: 580 Grande Allee E.	529–1625

All other consuls located in Montreal and send representatives to Quebec on request.
REPAIRS: Repairs of all types can be obtained.
DRY DOCKS: Department of Public Works located within Davie Shipbuilding Ltd. "Champlain" dry dock 1,150 ft. by 120 ft. at gate entrance. Can dock largest ships afloat. "Lorne" dry dock 624 ft. with floor width 73.5 ft. Also 3 outdoor berths and 1 covered berth.
SURVEYORS:

Lloyds Agent: P. A. Boutin Inc.	692–0660
Bureau Veritas:	MTL 288–6515
Det Norske Veritas: Hayes, Stuart & Co.	MTL 937–5336

REPATRIATION: All facilities for effecting crew changes and repatriation.
AIRPORT: 6 miles from city limits, served by regular airlines.
TIME: Eastern Standard Time GMT minus 5 hours. Daylight saving time from last week-end April to last week-end October, clocks advanced 1 hour.
HOLIDAYS: Longshoremen Official Holidays: Good Friday; Saint Jean Baptiste (June 24th); Confederation (July 1st); Labour Day (last Monday of September); Thanksgiving Day (beginning of October); Armistice Day (November 11th); Christmas Day. Cargo can be loaded or unloaded during each holiday except Labour Day.
POLICE/AMBULANCE/FIRE: Police (Harbour) 694–3645, City 694–6123, RCMP 694–3733; Ambulance 529–9221, 529–6811; Fire 694–6441.
TELEPHONES: No existing facilities for placing telephone on board.
TELEPHONE NUMBERS:

Port Warden, Captain J. P. Senterre	692–3853
Quarantine: Medical and Sick Mariners Service	694–3013
Manpower and Immigration	694–3513
Transport Canada – Marine Services:	
Regional Director: Jean Paul Godin	694–4158
District Manager: Jacques Lorquet	694–3420
Aids to Navigation: Lucien Cardinal	694–3574
Harbours and Property	694–3680
Marine Traffic Regulations: L. Misson	694–3884
Steamship Inspector Service	694–3237
Shipping Master: E. Lebars	694–3234
Laurentian Pilotage Authority: C. Bouchard	694–3358

SERVICE: Any services needed.
SHORE LEAVE: No restrictions.
DEVELOPMENTS: Extensive land reclamation work being carried out in the development of Beauport Flats will provide 1,500 acres of prime waterfront property for container and bulk-loading facilities. Work will commence shortly on the construction of a new berth (No. 55) at Beauport Flats, 1,200 ft. long with a depth of more than 50 ft. alongside. Beauport Flats are connected to the Metro-Quebec expressways scheduled for completion in 1980.
AUTHORITY: National Harbours Board.

ST. CATHARINES, Ontario: 43.11 N. 79.17 W.

Refer to "St. Lawrence Seaway" for important general information.
DOCUMENTS: See "Montreal".
HEALTH: See "Montreal".
PILOTAGE: Commences in lower St. Lawrence River and is continuous from district throughout Great Lakes. See "Quebec".
ANCHORAGES: Good anchorage areas at both ends of the Welland Canal.

(continued on page 164)

Loading Berths (Grain)

Elevator	*Number of berths*	*Berth name*	*Length of berth*	*Depth of water*	*Number of belts*	*Max. hourly capacity each belt (short tons)*	*Number of travelling loaders*	*Total max. hrly. capy. (short tons)*
Bunge	1	28	840 ft.	38 ft.	4	660	3	6,000

Unloading Berths

Elevator	*Number of berths*	*Berth name*	*Length of berth*	*Depth of water*	*Number of legs*	*Max. hourly capacity of each leg (short tons)*	*Total max. capacity (short tons)*
Bunge	1	18	800 ft.	35 ft.	2	900	1,800

MAX. SIZE: Max. size of vessel permitted in Welland Canal is LOA 730 ft. (222.51 m.), beam 75 ft. (23.15 m.), draft 26 ft. (7.92 m.).
HEALTH: Pratique granted in Montreal.
RADIO: Toronto Radio, Buffalo Radio.
TUGS: Tugs not generally used, but may be obtained from Hamilton, Toronto or Port Weller Dry Docks Ltd.
BRIDGES: Vessels are instructed by Traffic control on the transit of the Canal. Generally no delay for bridges.
BERTHING:

Port Weller Harbour East, Wharf No. 1:
Type – Various and Sundry Partial Cargoes
Equipment – Self Unloaders or Rented Cranes
Length – 638 ft. (194.5 m.)
Depth – 27 ft. (8.23 m.)

Port Weller Harbour West Wharf No. 2:
Type – Coal, Sand, Zircon Ore, Bulk Sugar
Equipment – Self Unloaders only
Length – 1,288 ft. (392.6 m.)
Depth – 27 ft. (8.23 m.)
Storage Capacity – 85,000 tons.

St. Catharines Wharf, Wharf No. 3:
Type – General Cargo, Oil
Equipment – Ships' Gear and Rental Equipment as Required.
Length – 330 ft. (100.6 m.)
Depth – 25 ft. (7.62 m.)

St. Catharines (or Homer) Wharf: Now used for bunkering purposes only. Abreast of the wharf is a turning basin with a depth of 7.62 m. (25 ft.) for ships of 106.68 m. (350 ft.) in length.
MEDICAL: Medical and hospital facilities are available in emergencies.
TANKERS: There are limited berths suitable for small domestic tankers.
DENSITY: Fresh water.
FRESH WATER: None available except in emergency by tank wagon.
FUEL: Fuel may be obtained in Port Colborne from Shell, Esso, and St. Catharines Fuels.
DEVELOPMENTS: To eliminate the winding section of the Welland Canal which ran through the centre of the City of Welland, and to minimize delays to navigation, a new 8.3 mile section of canal, which by-passes the City of Welland, was opened in 1973. The new channel is almost straight and is both wider and deeper than the old section. Approximately 1 hour has been saved on a vessel's round trip transit time since the opening of the new channel.
GANGWAY/DECK WATCHMEN: At discretion of the Master.
CUSTOMS ALLOWANCES: See "Montreal".
IDENTIFICATION CARDS: Not needed.
CONSULS: No consuls.
REPAIRS: Deck and engine repairs are possible.
DRY DOCKS: Situated at Port Weller able to accommodate vessels, LOA 730 ft.
SURVEYORS: A.B.S. at Toronto.
AIRPORT: International Airport at Toronto, 75 miles away.
TIME: GMT minus 5 hours. Daylight Saving Time when clocks advanced 1 hour usually 28th April and retarded 27th October.
POLICE/AMBULANCE/FIRE: St. Catherines – Fire 684–4311; Police 416–688–4111. Welland – Fire 734–4511; Police 416–735–7811. Port Colborne – Fire 834–4511.
SHORE LEAVE: Only when usual formalities are observed, e.g. Customs, Immigration, etc.
AUTHORITY: Director, Western Region, St. Lawrence Seaway Authority, St. Catharines.

SAINT JOHN, N.B.: 45.16 N. 66.03 W. (See Plan Book)

PORT LIMITS: A vessel is considered to be an "arrived vessel" when it comes alongside the pier.
DOCUMENTS:
2 Crew Lists.
2 Passenger Lists.
3 Sets Customs Documents.
3 Sets Health Documents.
6 Sets Cargo Manifests.
6 Sets Bills of Lading.
3 Sets Ship's Papers.
PILOTAGE: Compulsory. Pilots board at Harbour entrance within a radius of 8 miles from Partridge Island. Masters are reminded that it is essential to send ETA by radio directly to pilots' office and to ship's Agent, to avoid delay in waiting for Pilot. This ETA (in GMT and so stated) must be sent at least 3 hours before arrival. Any material change in ETA must be corrected as soon as possible. Pilot Office: Tel: 658 – 4864.

Pilots can be contacted on VHF Channel 16.

Vessels must report to the Coastguard Vessel Traffic Management System prior to entering the Bay of Fundy. VHF Channels 14 and 12 are monitored. Vessels must follow instructions from V.T.M. regarding traffic control.
ANCHORAGE: If required, Harbour Master will designate an anchorage, however, anchorage areas are designated both inside and outside harbour limits.
RESTRICTIONS: *(Report received from Operations Department of Shipping Company)*

During Spring each year due to thaw conditions a strong down flow (freshet) is experienced in the harbour (Saint John is a narrow harbour), and those vessels needing to transit the Courtenay Bay Channel to the oil terminals are restricted during this period to a maximum draft of 28 ft. (outward). To enter this channel a vessel must make a 70° turn to starboard across the main current, which is the reason for this restriction being imposed by the Pilots. Normally the freshet lasts from about the middle of April until the end of May, but may start or finish earlier or later depending on seasonal conditions.
MAX. SIZE: Controlling depth in main channel is 30 ft. at LW. Vessels length and breadth unlimited. Also see "Tankers".
HEALTH: See "Montreal".
RADIO: VAR Saint John.
TUGS: Available and considered necessary for docking and undocking large ships. 2 tugs usually needed, both in and out.
BERTHING: 27 berths. All but 2 are deep-water berths with depths up to 35 ft. Dredging done each year to maintain depth. Due to rise and fall of tide, boatmen usually necessary for running lines and docking. All berths are tidal. Tidal range up to 28 ft.

N.H.B. Facilities:

Berth number (usual name)	*Wharf Length (ft.)*	*Remarks*
Pier No. 1	1,235	General Cargo.
No. 2	1,025	Grain Loading and General Cargo.
No. 2 C	300	General Cargo.
No. 3	1,025	Grain Loading and General Cargo.
Rodney Term. A & B	1,225	3 Portainers
Rodney Term. C & D	1,348	
Pier No. 10	550	General Cargo.
No. 11	530	Open Section.
No. 12	870	General Cargo.
No. 13	800	Shed Heated and General Cargo.
No. 14	800	Shed Heated and General Cargo.
Long Wharf A	620	Open Section.
Long Wharf B	600	Shed Heated and General Cargo.
Pugsley Term. A & B	1,275	Grain Loading and General Cargo. Shed Heated
Pugsley Term. C	770	Shed Heated and General Cargo.
Broad St. Wharf	900	Petroleum Berth

(Private Facilities: see page 165)
CRANES: Mobile cranes available.
MEDICAL: Hospital available, also Seaman's Clinic.
STEVEDORES: Stevedores required in morning must be ordered by 1600 hrs. preceding day, and stevedores required in afternoon must be ordered by 1100 hrs. same day.
TANKERS: Controlling depth in channel to tanker wharves at Courtenay Bay is 18 ft. LW. Max. draft of 40 ft. only available at Spring tides. Also see "Restrictions".

Canaport: Situated 6 miles from Saint John, 4,100 ft. offshore from Mispec Point. Tankers moor and sail at any time, day or night, at any stage of tide to a Mono-buoy, depth 120 ft. at LW. Underwater pipe-line, diameter 20 – 36 in. connected to terminal with 10 tanks each with capacity of 9 million gallons. There are 2 pumps with total capacity 2,000,000 g.p.h.
FRESH WATER: Available from pipe-lines throughout the docks.
FUEL: Fuel oil and diesel oil available. Diesel and bunker fuel can be delivered by pipe-line in Courtenay Bay, where vessels restricted to high water. Also delivered by barge and by truck to wharves.
GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: Carried out by stevedores.
CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes or 50 cigars or 2 lb. tobacco per person over 16 years old.

Wines/Spirits: total of 40 ounces per person over 21 years old.

Subsequent issues may be authorised to Crew members of foreign vessels, but the max. quantity any Crew member may hold at any time must not exceed 300 cigarettes, 75 cigars, 3 lb. tobacco, and 60 ounces wines/spirits.
DEVELOPMENTS: *Forest Products Terminal:* Length 1,235 ft. depth at LW 36 ft. (formerly Navy Island berths 1a & 1b.). Now completed.
IDENTIFICATION CARDS: Not required.
CONSULS:

Danish Vice-Consulate	Tel. 652-6320.
Finland	,, 693-7268.
Netherlands	,, 693-1403.
Sweden	,, 693-2613.

REPAIRS: Complete repair facilities and equipment available also salvage equipment.
DRY DOCKS: 2. One 1,150 ft. by 125 ft. by 53 ft. deep with 42 ft. of water over sills at high tide. Smaller one 440 ft. by 60 ft. by 34 ft. deep, 22 ft. water over sills at high tide.
REPATRIATION: Can be arranged.

Private facilities:

Berth	Length (ft.)	Depth at LW (ft.)	Utility and General Remarks
(1) Atlantic Sugar Refineries	475	30	2 cranes for bulk loading
(2) Irving Pulp and Paper Co.	900	22	Used for shipping bleached sulphite pulp and receiving fuel oil and sulphur. Can berth ship 350 ft. in length with draft of 22 ft.
(3) Dept. of Transport, Marine Agency Wharf	550	24	East-side, North of Pugsley Terminals
(4) Irving Oil Co. Ltd. Tanker Wharf		40	In Courtenay bay, capable of handling oil tankers up to 40 ft. draft.
(5) C.P. Rail Ferry Terminal	830	22	Used by SJ-Digby Ferry and auto carriers. This is a roll-on/roll-off facility
(6) MacMillan Rothesay Ltd.	460		This is a roll-on/roll-off facility for loading towed barges. At low water the barges rest on a prepared bottom
(7) Canaport			A floating buoy mooring owned by Irving Refining Ltd. – Canaport can accommodate the largest tankers afloat

Grain handling Facilities:

Elevator	Capacity in bushels	Loading galleries at berths	Loading capacity bushels per hour	Remarks
(1) Canadian National Elevator (East-side)	500,000	Pugsley B	15,000	Length of conveyor galleries 1,865 ft.
(2) Canadian Pacific Elevator (West-side)	1,000,000	2–3	60,000	Elevators (2) and (3) are connected by galleries and grain can be transferred from one to the other
(3) National Harbours Board Elevator (West-side)	1,500,000	2–3	60,000	Combined length of conveyor galleries to berths 10,065 ft.

AIRPORT: Regular services by Air Canada from airport 12 miles from harbour. Also Eastern Provincial Airways and private charter flights.

TIME: GMT minus 4 hours. In Summer, time is GMT minus 3 hours.

HOLIDAYS: New Year's Day; Good Friday; Queen's Birthday (May 20th); Dominion Day (July 1st); Labour Day; Thanksgiving Day; Remembrance Day (November 11th); Christmas Day. Cargo work can be arranged on any day except for Labour Day.

POLICE/AMBULANCE/FIRE: From waterfront through private telephone which answers only to the number 50.

TELEPHONES: If required can be placed on board. A telex can be placed on board vessels at Pier No. 1 if required. This is for container terminals only.

SERVICES: All services available including compass adjustment.

SHORE LEAVE: Crew allowed ashore.

AUTHORITY: National Harbours Board.

ST. JOHN'S, Newfoundland: 47.34 N. 52.41 W.

DOCUMENTS: **(See Plan Book)**

Quarantine

Completed Declaration of Health (QSI).

Valid Derating Certificate.

International Vaccination Certificate against smallpox for all on board.

Customs

Crew Declarations (Y.14).

3 Ship's Stores (E.1).

Inward Report (A.6).

Complete copy of each Manifest for goods to be discharged in Canada.

Clearance from Last Port.

Immigration

2 Immigration Crew Lists (200).

2 Tally Sheets (201).

3 Passenger Manifests for passengers not disembarking.

Immigration Control Cards for each person.

PILOTAGE: Compulsory. To avoid a delay in obtaining Pilot, the Owner, Master, or Agent of a ship bound for St. John's must report via any coast station by R/T or W/T the vessel's ETA 12 hours in advance of ETA. ETA's must be confirmed or corrected not less than 3 hours prior to ETA. Time must be GMT. In message of ETA, the following information must be included.

(1) Name/call sign of vessel
(2) Nationality
(3) Length, draft, and gross registered tonnage.

Pilot Boarding Station:

Lat. 47° 33′ 42″ N., Long. 52° 37′ 54″ W. (2 miles off entrance) 3.22 km.

Marine Operations Centre stand by on: VHF Channel 16 (156.8 Mhz); VHF Channel 11 (156.55 Mhz); Telephone: 737-5151.

Berthing:

(a) Pilot – compulsory. Shifting or ETD requires a 2 hour advance notification to Coast Guard Traffic Centre.
(b) Berths arranged by Harbour Master in advance.
(c) Two small tugs available.
(d) Linesmen – arranged through Pilots.
(e) Boatmen – arranged through ship's local agents.

ANCHORAGE: No anchorages near harbour. Safe anchorage in harbour.

MAX. SIZE: No restrictions except draft 35 ft. max.

HEALTH: Pratique, cable name and nationality of ship, ports of call during voyage, nature of cargo, number of crew and passengers, port of destination and Agent, condition of health of all on board with details of any sickness, and whether all vaccinated. Also see "Montreal".

RADIO: St. John's Marine Radio, call sign VON duplex R/T on 2118 kc/s., 2206 kc/s, and 4110.8 kc/s.

TUGS: As required by Pilots. Normally ship's lines used. 2 small tugs available.

BERTHING:

National Harbours Board:

Berth No.	Wharf length (m.)	Depth at low water (m.)	Remarks
1	175.3	3.0–6.1	Nfld. S/S Operation Shed 1
2	164.6	9.1	
3	182.9	9.1	Berth 3-4-5 serviced by Sheds No. 2 and 5
4	118.9	9.1	Dangerous cargo berth. Note that explosives in small amounts to be approved by National Harbours Board prior to arrival.
5	160.1	8.8–9.1	
6	158.5	6.1–7.0	
7	122.0	7.0–7.9	(repairs) E. F. Barnes machine shop – Shed No. 3
8	152.5	7.9–9.1	
9	152.5	7.3–7.9	
10	158.5	9.1	
11	155.5	9.1	
17	182.9	7.9–12.2	Golden Eagle, also shedded berth – Shed No. 4
19	114.3	5.8–7.6	
20	162.5	5.5–8.2	
21	58.5	8.5–7.3	
32	175.3	2.7–1.2	Small fishing vessels only

Private facilities:

Berth	No.	Length (m.)	Depth, low water (m.)	Utility & General Remarks
Harvey Furness	12	114.3	7.3–8.5	Bulk, automobiles
Harvey Furness	14	152.5	5.8–9.1	Bulk, General cargo, offshore services
Harvey Furness	15	106.7	8.2–9.5	Bulk cargo, container services
Harvey Furness	16	144.8	7.6–10.1	General cargo
Mobil Oil	22	152.5	6.7–9.1	
Imperial Oil	23	144.8	7.6–10.1	
Irving Oil	24	68.6	9.5–10.4	
Jobs Cold Storage	25	137.2	4.9–7.3	
Imperial Oil	26	61.0	6.7–7.3	
Bowring	27	152.5	5.5–7.0	
Gulf Oil	28	68.6	5.2–7.0	
Gulf Oil	29	114.3	5.2–7.6	
C.O.T.C.	30	99.1	5.2–5.5	
M.O.T.	31	182.9	7.0–7.6	
C.N.R.	33	106.7	1.2–4.9	Dry dock
C.N.R.	34	106.7	4.9–7.0	Dry dock
C.N.R.	35	91.5	7.6–8.5	Dry dock
C.N.R.	36	106.7	5.8–7.6	Dry dock
C.N.R.	37	114.3	6.7	Dry dock

CRANES: Port Authority heavy-lift crane available 76.6 tonnes capacity.
STEVEDORES: Advise before 1600 hrs. ETA in order to commence 1800 hrs. same day or 0800 hrs. next day.
MEDICAL: No advance notice except in case of serious illness to be included in arrival cable, ample hospital facilities available.
TANKERS: Discharge lines 6 in., 8 in., 10 in., 12in. No slop facilities.
Holyrood Refinery: 47.23 N. 53.08 W.

A bunkering port of Golden Eagle Canada Ltd., situated in the South Arm of Holyrood Bay at the head of Conception Bay, S.E. coast of Newfoundland. Finished, refined petroleum products are exported from Holyrood, and crude petroleum is imported.

Channel depth: 35 ft. right up to wharf. Tidal range is 4–5 ft. at springs, and 3.5 ft. at neaps. Good anchorage anywhere in Holyrood Arm.

One 275 ft. long berth, depth alongside 34 ft. 6 in. high water, 32 ft. low water, with moorings for Bow and stern lines on shore. Situated at Golden Eagle Refinery. 3 in. water mains for fresh water.
DENSITY: 1025.
FRESH WATER: Fresh water available all berths. Order through Agent. Rate approx. 25 t.p.h.
FUEL: Oil delivered by pipe-line at 8 berths, and by tank trucks at all other berths. Major grades of bunker fuel and diesel as well as marine lubricants can be obtained through suppliers.
GANGWAY/DECK WATCHMEN: Usually ship's crew. Ship's gangway used.
OPENING/CLOSING HATCHES: Stevedores or ship's crew whichever to ship's advantage.
CERTIFICATES:
Construction Certificate.
Safety Equipment Certificate.
Radio Safety Certificate.
Load Line Certificate.
Cargo Gear Book.
CUSTOMS ALLOWANCES: Tobacco: Each man 200 cigarettes per week. Wine and Spirit: Each man 40 oz. wine or spirits, per week.
CREW IDENTIFICATION CARDS: Not required.
CONSULS:

France	726–3837	Dominican Rep.	579–5081
Portugal	726–6958	Netherlands	726–2961
U.S.	726–4524	Norway	579–5006
Brazil	726–7702	Spain	726–1804
Denmark	726–8000	West Germany	722–1525
Sweden	726–8000	Iceland	722–4270

REPAIRS: Most deck and engine repairs can be carried out.
DRY DOCKS: St. John's Dry Dock (owned by C.N.R.). Length at coping head, 173.9 m.; at floor head, 173.2 m.; maximum length of keel blocks 167.1 m.; width at coping, 23.3 m.; depth of water over sill, 8.2 m.

Machine shop is equipped for major repairs to hulls machinery.
REPATRIATION: Crew changes and repatriation can be carried out with little difficulty.
AIRPORT: Distance 4 miles served by Air Canada 4 flights daily.
TIME: GMT less 3.5 hours. Last Sunday in April clocks advanced 1 hour. Last Sunday October clocks retarded 1 hour.
POLICE/AMBULANCE/FIRE: Police 722-5111; Ambulance 726-3037; Fire 722-1234. Emergency No. 911.
SERVICES: Compass adjusting, radar repairs, RT repairs, gyro compass repairs, all types electronic equipment repaired. Divers available for surveys and underwater repairs.
SHORE LEAVE: No Restrictions.
REGULATIONS: Fishing ships must advise of weekend arrival on Friday so that permit to take supplies can be obtained from Federal Dept. of Fisheries.
HOLIDAYS: New Year's Day; St. Patrick's Day; Good Friday; St. George's Day; Commonwealth Day; Discovery Day; Memorial Day; Orangemen's Day; Labour Day; Armistice Day; Christmas Day; Boxing Day.

Except for Easter and Christmas, the above holidays are normally taken on the nearest Monday to the festival date.
AUTHORITY: Port Manager, Harbours Board.
AGENTS: Blue Peter Steamships Ltd., PO Box 5758, St. John's. Tel. 726–2440 Area Code 709. Telex. 016–4510. Cables Bluepeter.

SARNIA, Ontario: 42.59 N. 82.25 W.

Refer to "St. Lawrence Seaway" for important general information.
DOCUMENTS: All documentation carried out by Authorities in Montreal. Only when vessels have called at United States port after departing Montreal will any changes in documentation be necessary, which will consist of a United States Customs Clearance Certificate, to be available on board.
Immigration Papers.
1 copy QS2 (Health Certificate).
3 Stores Lists.
Crew Personal Effects List.
Customs Clearance.

All of the above will have been stamped in Montreal.
RESTRICTIONS: Navigation season – ice forms about December 15th and breaks up about the middle of March. Vessels size restricted by Seaway locks.
MAX. SIZE: Length 730 ft., beam 75 ft. 6 in., draft 25 ft. 6 ins.
PILOTAGE: Notice of ETA should be given to Pilots at least 6 hours before arrival at Sarnia to avoid delays. Accommodation ladder should be rigged in readiness.
RADIO: Sarnia Radio, call sign VBE, communicate on either AM or FM radio telephone.
HEALTH: Pratique granted at Montreal.
BERTHING: Over 2 miles of water front including main wharves listed below:

C.N.R. – C.S.L. Dock, length 1,100 ft., depth alongside 23 ft.; Empire Hanna Coal Dock, length 700 ft., depth alongside 19 ft.; Elevator Dock, length 900 ft., depth alongside 24 ft.; Dept. of Transport Dock, length 1,045 ft., depth alongside 27 ft.; Dalton Fuels Ltd., length 590 ft., depth alongside 20 ft.; Imperial Oil Ltd., Dock A, length 592 ft., depth alongside 22 ft.; Dock B, length 326 ft., depth alongside 19 ft.; Dock C, length 610 ft., depth alongside 25 ft.; Dock E, length 600 ft., depth alongside 25 ft.; Polymer Corp. Dock, length 600 ft., depth alongside 21 ft.; Sun Oil Co. Dock, length 300 ft., depth alongside 22 ft.; Dow Chemical Co. Dock, length 300 ft., depth alongside 20 ft.; Canadian Oil Co. Dock, 1,500 ft., depth alongside 24 ft.
DENSITY: Fresh water.
MEDICAL: Hospital facilities at Sarnia. All assistance available.
FRESH WATER: Available at all berths.
FUEL: All grades available from Imperial Oil and Shell Co. berths.
REPAIRS: Hull, boiler and engine repairs can be effected. No dry docks.
AUTHORITY: Department of Transport.

SAULT STE. MARIE, Ontario: 46.28 N. 84.22 W.

Refer to "St. Lawrence Seaway" for important general information.
DOCUMENTS: See "Montreal".
PILOTAGE: River or local Pilots available on 6 hours notice. U.S. Corps of Engineers, Sault area operate and control St. Mary's River Falls Canal and regulate traffic through all locks in both cities.
HEALTH: Board of Health Officers can make a call to the ship.
RADIO: Good ship-to-shore telecommunication available through Department of Transport Radio Station, Canadian Pacific Telecommunications and Canadian National Telecommunications. United States Coast Guard maintain fully equipped Coast Guard Base and have radio communication for all frequencies in entire St. Mary's River and Harbour area; they are available immediately for information pertaining to shipping in area and movement of ships in River.
TUGS: Harbour tugs available when required, but prefer advance notice order avoid delays. In Sault Ste. Marie, Ontario tugs available.
BERTHING: Government dock, "L" shaped pier length 500 ft. on East side 18 ft. deep on South side, the river side, it is 356 ft. long, 20 ft. deep. This dock is used for discharging general cargo. No crane facilities for loading and unloading, unless ship's gear is used, mobile cranes have to be brought in. No tug required to berth or unberth a ship at this dock under normal weather conditions.

Algoma Central Railway Terminals Dock. A slip approximately 700 ft. long on East side 18 ft. 6 in. deep with inner 200 ft. having less than 16 ft. depth; South side this dock 350 ft. long with depth 16 ft. Used for aggregates, ores and materials. Tug required to berth or unberth at this slip.

Algoma Steel Corporation Dock. Situated above Canadian Canal with following berths available:
(*a*) Coal and ore dock with a combined length of 2800 ft.
(*b*) Commercial dock on West side of slip 400 ft. long.
(*c*) Limestone dock, "L"-shaped dock on West side 355 ft. long and on South side 450 ft. For loading finished steel.

All 3 Algoma Steel Corporation docks 21 ft. 6 in. deep. Only material consigned to or being shipped from Algoma Steel Corporation have access to these docks.

Seaway Pier: Northeast pier at Canadian Canal which could be used for berthing ships and also used occasionally to load or unload cargo into trucks. This pier approx. 500 ft. long and mobile lifting equipment could be utilised here if necessary. Depth of water 18 ft. Pier mostly used as tie-up for making minor repairs afloat, for medical purposes, or waiting for berth at Algoma Steel Corporation Dock. Berthing and unberthing carried out any time, Sundays and holidays with exception of extreme bad weather, high winds, or fog.
STEVEDORES: Available for loading and unloading at any berths in Sault Ste. Marie area.
FRESH WATER: Available either by hose or by pumper truck at any dock.
FUEL: Diesel bunkers available at any berths via tank trucks. No bunker "C" facilities available at Sault St. Marie, but can be obtained at Lime Island about 50 miles down river. This station is open during entire navigation season.
REPAIRS: Normal ship repairs are carried out on very short notice if required.
AUTHORITY: Dept. of Transport.
AGENT: The Algoma Steel Corporation, Marine Division.

SEPT ILES (Seven Islands) Quebec: 50.11 N. 66.23 W.

(See Plan Book)

The city of Sept-Iles is located on the Northeast side of the Baie des Sept-Iles, a sheltered circular basin screened to seaward by 7 small islands on the North shore of the St. Lawrence River.
DOCUMENTS: The following inward papers are to be completed prior to arrival and presented to custom officer on boarding:

Health	QS-2001	Quarantine Form	in duplicate
Immigration	IMM-200	Crew List	in triplicate
Customs	A-6	Report Inward	in triplicate
Customs	Y-14	Crew Declaration	in triplicate
Customs	E-1	Ship's Stores	in triplicate

Clearance from last port

The above forms will be supplied by mail on request.

Note: On New Canadian or International Crew Lists, black pen or typewriter must be used. Blue is not acceptable.

Arrangements have been made so that loading can commence before customs entry has been completed, and customs outward papers will be completed so as not to interfere with immediate departure after completion of loading.

DOCKING MASTER: The use of a Docking Master is compulsory for Ore Carriers docking, shifting and leaving the dock. Docking Master will board inside harbour limits in area of 50° 10' N. and 66° 24' W.

All vessels shall provide rope ladder for boarding Pilot on arrival and disembarking Pilot on departure. Ladder must be well secured by adequate lashings to rail or deck. Power hoists in good order and properly attended are acceptable for boarding. Vessels over 30,000 d.w.t. shall also provide accommodation ladder with rope ladder. The landing platform of the accommodation ladder should be approx. 20 ft. above water.

ANCHORAGE: Ships should anchor at least 1 mile off dock to facilitate ships movement in bay and should not proceed closer than 1 mile from dock while waiting for Docking Master to board. Vessels may be requested to shift anchorage if their position interferes with normal docking approaches.

MAX. SIZE: Iron Ore Co. Loading Dock (Old): length 850 ft., beam 130 ft., draft 43 ft. Iron Ore Co. Loading Dock (New): length 1,100 ft., beam 175 ft., draft 57 ft. Imperial Oil Dock: length 775 ft., draft 40 ft.

Vessels over 30,000 d.w.t. arriving in ballast to load ore cargoes are requested to present in accordance with the following recommended arrival drafts to ensure safe handling procedures, keeping in mind indicated ship loading rates. These drafts are intended to mean minimum draft aft with normal vessel trim.

Summer Deadweight	*Recommended Arrival Drafts*
Under 30,000	4.0 m. to 4.6 m.
30,000 to 40,000	4.6 m. to 5.2 m.
40,000 to 60,000	4.9 m. to 5.8 m.
60,000 to 75,000	5.5 m. to 6.4 m.
75,000 to 100,000	6.1 m. to 7.3 m.
100,000 to 150,000	8.5 m. to 11.0 m.
150,000 to 200,000	11.0 m. to 13.0 m.
200,000 to 250,000	13.0 m. to 14.0 m.
250,000 and over	14 m. and over

Any vessels unable to meet these suggested drafts due to insufficient ballast capacity, anticipated deballasting problems, etc., should state this in 48 hours ETA, along with estimated deballasting time.

Usually ships berth port side to.

RADIO: Sept Iles Radio, call sign VCK, operating on RT and VHF 24 hours daily.

CW	Calling frequency	500 kHz	
	Working frequency	420 kHz	
RT	Calling frequency	2182 kHz	
	Transmitting frequency	2582 kHz	
	Receiving frequency	2206 kHz	
RT (duplex)	Transmitting frequency	2582 kHz	
	Transmitting frequency	2514 kHz	
	Receiving frequency	2206 kHz	
	Receiving frequency	2118 kHz	
	Receiving frequency	2158 kHz	
VHF	Receiving & transmitting	156.6 mHz	Ch. 12
	Receiving & transmitting	156.8 mHz	Ch. 16
VHF (duplex)	Receiving	157.3 mHz	Ch. 26
	Receiving	157.2 mHz	Ch. 24
	Transmitting	161.8 mHz	Ch. 24
		420-Even hours plus 50 GMT	
		2582/161.9-Even hours plus 40 GMT	

Weather Ice Report and Notice to Shipping

Channel 59	Receiving frequency	2582 kHz	
Channel 26 and CW	Receiving frequency	161.9 mHz	1330 GMT 1830 GMT 0130 GMT

Ore Carriers:

Advising Arrival: Cable address "Iroccan" Sept-Iles. Please advise ETA 96 hours, 72 hours, 48 hours and 24 hours out, including in 96 hours ETA tonnage of cargo required.

Vessels sailing in ballast from Montreal, Sorel, Three Rivers or Quebec should send ETA on departure these ports with corrected ETA later if necessary.

Advise with 24 hour ETA probable ballast pumping time required on arrival. If any change in ETA or in ballast situation should occur after 24 hour ETA, it should be advised as soon as possible.

Ships inbound for Sept-Iles from seaward between 15th December and 15th April, should advise the Ice Operations Officer, Halifax, N.S., 36 hours prior to entering Cabot Strait, stating position, destination and ballast condition to facilitate the passing of information on conditions in the Gulf. Ships trading during this period should also avail themselves of the Canadian Government publication *Guidance to Merchant Ships Navigating in Ice in Canadian Waters.* Copies available on request.

The Marine Services office is equipped with VHF radio on 156.6 mHz (Channel 12) and should be called direct when ship in range. Office also equipped with 156.35 mHz (Channel 7-A). All vessels calling Sept-Iles for ore should be fitted with local VHF channels for efficient harbour communications. Those not so fitted may be provided temporary sets if their time at anchorage justifies. This expense will be for ship's account.

Docking Instructions: Ships are to request instructions 4 hours before arrival. These instructions will be given as promptly and concisely as conditions permit. However, we suggest all vessels recheck with VCK abeam of Corossol for further traffic.

Marine Services is set up to receive radio messages on 24 hour basis. Radio traffic by ships at anchor is permissible in Sept-Iles harbour area.

HEALTH: Radio Quebec for pratique during office hours and 24 hours before arrival. Address message "Quarantine Quebec" (Ships trading coastwise between Canada and United States consecutively and touching no other foreign port since last granted Canadian pratique are not required to comply with the above. Vessels granted American Duplicate Pratique are also exempt from this requirement.)

Ships arriving Sept-Iles Bay in Quarantine will be inspected by Health Officer at anchorage or on arrival alongside. Should officer board vessel at anchorage proper accommodation ladder must be provided.

Quarantine message should have the following information:

Name and nationality of vessel, port of departure, destination, health condition on board ship, number of crew and passengers, type of cargo or in ballast.

TUGS: Tug service is compulsory at Iron Ore Company docks and Wabash Mines Docks. Two tugs of 5,400 h.p. available.

Additional tug power is available from Port-Cartier when required. All communications between tugs and Pilots is by VHF. Tugs operate on 156.35 mHz for Sept-Iles movements, 156.9 for Pointe Noire.

All ships should be equipped with wire cable towing line with nylon pendant for tug use in undocking. Ships not so equipped will be provided with tug tow lines. Pilot to determine adequacy of ship's tow lines.

BERTHING:

N.H.B. – Facilities

Berth Number (usual name)	*Wharf length (ft.)*	*Depth at Low Water (ft.)*	*Remarks*
Pointe-aux-Basques	600	34	Small open section at East end of Shed No. 1
Shed No. 1			General cargo shed
Shed No. 2			General cargo shed West and behind Shed No. 1
Mgr. Blanche Wharf	900	23	General cargo berth. Also has docking facilities at the end of the Finger Pier, approx. 180 ft. with a draft of 27 ft. Docking on the end and the West side of pier only. Small open berth at upper end of pier
Town Wharf	546	—	Small coastal vessels Finger Pier also used for small cruising vessels and crafts
Pointe Noire Pier	—	—	Not to be used unless directed by Port officials

Private Facilities

Berth	*Length (ft.)*	*Depth at Low Water (ft.)*	*Utilisation and general remarks*
Wabush Dock	650	37	General cargo and mooring berth (East end). Total 1,600 ft. berthing
Terminal	950	37	Iron Ore loading berth (West end). Total 1,600 ft. berthing (Loading ore by means of 2 travelling boom conveyors. Total capacity 8,000 long t.p.h.)
Iron Ore Dock Terminal	800	34	Mooring and general cargo receiving berth (West)
Southeast Berth			
No. 1 Dock	800	38	Ore loading berth 2 travelling boom conveyors max. design capacity. Total berthing length 1,600 ft.
No. 2 Dock	900	60	Total effective mooring length approx. 1,600 ft. Two travelling shuttle boom loaders with 764 ft. of travel. Max. design capacity 7,500 long t.p.h. each
Imperial Oil Dock	300	40	Dolphins increase capacity for berthing

See also following information on The Ore Company berths. Vessels usually berth port-side alongside.

Number 1 Dock. 2,200 ft. (670 m.) dock divided into 3 berths. The Southeast or loading berth is 800 ft. (224 m.) in length and is fendered with large truck tyres mounted over the dock face. The adjoining 800 ft. (244 m.) mooring or waiting berth is also fendered with large truck tyres. The third and last section, 600 ft. (183 m.) in length, is a Government berth used for general cargo.

Dredged depth at the loading berth is 37 ft. (11.3 m.) at mean low water, 34 ft. (10.4 m.) at mooring berth. Designing depth at the government berth is 27 ft. (8.2 m.). At the loading berth, iron ore is loaded into vessels by means of 2 travelling boom conveyors with a max. design capacity of 4,000 metric t.p.h. each.

The distance from mean low water to loaders in horizontal position is approx. 35 ft. (10.7 m.). Loaders can operate at an angle of up to 12 degrees from the horizontal. Vessels should present for loading with a maximum distance of 40 ft. (12.2 m.) from waterline to hatch coaming. Number 1 dock is fitted with bollards spaced at 50 ft. (15 m.) centres.

Number 2 Dock. Deepwater berth is located some 900 ft. (274 m.) Southeast of original dock and extends approx. 230 ft. (70 m.) further into bay. This single berth is open cell construction with 9 parallel cribs giving total berthing face of approx. 925 ft. (282 m.). A tenth transfer house crib, inset from dock face and a dolphin, both structures fitted with mooring winch and bollards, are located approx. 150 ft. (46 m.) and 350 ft. (107 m.) respectively from NW. corner of dock face. Two additional dolphins, also fitted with mooring winch and bollards, are situated in a line approx. 150 ft. (46 m.) inside dock face and approx. 100 ft. (30 m.) and 400 ft. (122 m.) from S.E. corner of dock. Dolphins are joined to main dock structure by catwalks. Total effective mooring length is approx. 1,600 ft. (488 m.). Cribs are fendered to waterline with triple sets of extra large truck tyres. Dredged depth is 60 ft. (18.0 m.) m.l.w. Dock is fitted with 2 travelling shuttle boom loaders with 764 ft. (233 m.) of available shiploader travel, and a maximum design capacity of 7,600 metric tons/hr. each. Number 2 Dock is fitted with bollards spaced at 100 ft. (30 m.) centres. Recommended maximum airdraft for this berth is 17.0 m.

Tidal characteristics	neaps	5 ft. 06 in. (1.68 m.)
	springs	11 ft. 00 in. (3.35 m.)

CRANES: Heavy-lift cranes available. Max. capacity 250 tons.
MEDICAL: Masters are requested to have seamen's smallpox vaccination certificates ready for inspection, also ship's deratisation certificate. Seamen who cannot produce a valid smallpox certificate may require vaccinating in special cases.

All crew members requiring medical attention should be available upon ship's arrival. Sick Mariners dues no longer apply for treatment of seamen. Agent will provide form of application to be given to doctor for crew members requiring medical attention.
TANKERS: Berth at Imperial Oil Dock. Max. draft 40 ft.
FRESH WATER: Can be supplied at the approx. rate of 35 t.p.h. Hose is available on the dock but ships' crew are required for connecting and disconnecting.
FUEL: Available on an emergency basis only at this time. All enquiries should be directed to BunkerEsso Montreal.
CUSTOMS ALLOWANCES: Each crew member is allowed to retain in his possession for his personal consumption 200 cigarettes, 40 ounces of spirits, 50 cigars or 2 pounds of pipe tobacco. All quantities must be declared on Crew Declaration form Y-14 along with all personal effects such as radios, cameras, tape recorders, binoculars, etc., plus serial numbers of each such item.
REPAIRS: Minor repairs can be effected at Sept-Iles. Repairs to be conducted under the supervision of ships' personnel.
TIME: Sept-Iles maintains Eastern Standard Time (GMT minus 5) from last Saturday in October until last Saturday in April. Eastern daylight time (GMT minus 4) is maintained the balance of the year.
SHORE LEAVE: Crew not allowed ashore until permission granted by the authorities.
GENERAL: Ships will be loaded in regular turn of vessels subject to cargo availability and providing they present with starting hatches open and do not have ballast pumping which will exceed expected loading time. This loading time should be calculated at the rate of 6,600 metric tons/hr. at dock No. 1 and 10,000 metric tons/hr. at dock No. 2.

For establishing turn of vessels, a ship will be considered "arrived" at the time of crossing line between Pointe au Corbeau and Pointe aux Basques.

Loading plans should be presented to the loading foreman on arrival.

Ore-Oil and OBO vessels having discharged petroleum products at last port must advise this in first ETA. If gas-free certificate not already granted by independent chemist, arrangements will be made by IOC Marine Services to have chemist attend. Expense for ship's account.

Ships will leave the loading dock immediately upon completion of cargo and secure for sea in the bay. If any delays occur on documentation, crew members missing, etc., ship will leave the dock and all matters will be handled from anchorage.

Present outlook for working hours, subject to change during the season, is as follows: 24-hour operation Sundays included. No work Christmas Day or New Year's Day.

Main engines are required for shifting. Vessels at the mooring dock will be given 30 minutes notice to prepare to shift before departure of loaded vessel. Vessels are requested to have main engine ready when alongside mooring and loading docks.

Permission contrary to the above must be obtained from the Iron Ore Company of Canada in writing.

Most supplies can be readily obtained at Sept-Iles. Quantity orders should be included in 48 hour ETA. Requests for bonded stores should be included in 96 hour ETA.

Garbage service available alongside on request.

Launch service is available on request through Marine Services, Channel 12.
AUTHORITY: National Harbours Board.

SHEET HARBOUR, N.S.: 44.50 N. 62.30 W.

DOCUMENTS: See "Montreal"
ICE: Open all year with aid of icebreaker during January, February and March. Ice forms about January 15th and breaks up between March 1st and 15th.
PILOTAGE: Compulsory. Pilot boards off Sheet Rock light.
ANCHORAGE: Anywhere in harbour in depths up to 10 fathoms.
MAX. SIZE: See "Berthing".
MEDICAL: Hospitals available.
RADIO: Ship-to-shore communications: through Halifax (VCS).
TUGS: None.
BERTHING: Wharf, berthing length 500 ft. depth low water 21 ft. No railroad or handling facilities on wharf. Small Dept. of Transport wharf 20 ft. depth low water.
STEVEDORES: Skilled labour available. Gangs consist of 20 men.
FRESH WATER: Available by hose from mill.
FUEL: None available.
REPAIRS: No facilities available.
AIRPORT: Halifax 75 miles.
TIME: GMT minus 3 hours in Summer. GMT minus 4 hours Winter.
AUTHORITY: Dept. of Transport.

SHIPPEGAN HARBOUR, N.B.: 47.45 N. 64.42 W.
CARAQUET HARBOUR: 47.48 N. 64.56 W.

(See Plan Book)

DOCUMENTS: See "Montreal".
PILOTAGE: Approaching vessel hoists flag "G" and uses siren about 1 mile before reaching fairway buoy. Pilot boat motorised 45-ft. vessel, approaches on leeside. Approaching vessels wait for Pilot about a mile from fairway buoy.
ANCHORAGE: Good anchorage, usually by fairway buoy.
RESTRICTIONS: Entry possible night and day, good vision, lighted buoys and beacon lights.
MAX. SIZE: High tide: 23 ft. low tide: 17 ft. (At Shippegan, max. tide: 20 ft.).
HEALTH: See "Montreal".
RADIO: VCN Grindstone Radio and VCG Fox River.
TUGS: Not required for these ports.
BERTHING: Caraquet Wharf, 28 ft., Shippegan 25 ft.
MEDICAL: No notice required, hospital available, as required when conditions warrant.
FRESH WATER: Available.
CUSTOMS ALLOWANCES: Tobacco, 200 cigarettes per week per man. Wine/Spirits, Spirits allowed to officers. Beer to crew.
REPAIRS: Minor ship repairs and all electrical repairs.
TIME: Atlantic Standard Time GMT minus 4 hours, Daylight saving time from last week-end in April to last week-end in October, clocks advanced 1 hour.
AIRPORT: Moncton, 150 miles, Chatham, 70 miles.
POLICE/AMBULANCE/FIRE: *Caraquet*, Police RCMP 727-2828; Police Town, 727-3167; Fire, 727-2928; Hospital, 727-3435. *Shippegan:* Police, RCMP, 336-2210, Town, 336-2351. Hospital: 344 2261.
AUTHORITY: Dept. of Transport.

SOREL, Quebec: 46.03 N. 73.09 W. (See Plan Book)

DOCUMENTS:
2 Crew Lists.
2 Passenger Lists.
3 Crew Declarations (Can. Form Y14).
3 Store Lists (Can. Form E.1).
Health Declaration (Can. Form QS.2001).
3 Cargo Manifests.
3 Bills of Lading.
PILOTAGE: Compulsory. Under the Montreal Pilotage Authority. Vessels coming in from sea secure Pilots at Escoumins, Quebec and Three Rivers.
ANCHORAGE: Safe and roomy anchorage is provided in the St. Lawrence River off Sorel in a basin nine miles long by half a mile wide with 30 to 50 feet water depth. There is no tidal influence at this point.
RESTRICTIONS: Speed limits not to exceed 10 m.p.h. in the Harbour of Sorel. Sections 8, 9 and 10 reserved for D.O.T. vessels.
MAX. SIZE: Up to 32 ft. draft. Governed by least depth in channel of 35 ft. at low water.

HEALTH: Pratique may be obtained by radio to Quarantine Quebec. Health Officer boards on arrival. Valid smallpox vaccination certificates required.

Sorel is also an organised quarantine sub-station. (See "Canadian Quarantine Requirements" for full particulars).
RADIO: St. Lawrence River Marine Traffic Control call sign VFN Sorel and VBK Three Rivers.
RADAR: Radar service may be obtained by VHF from Montreal.
TUGS: Tugs are available all year round at Sorel. Their use is advisable for all berths in the Richelieu River, for berths in Lanctot Basin and at Section 5 for ships exceeding 250 ft. in length or having low manoeuvrability. They are also needed for large ships at Sections 15 and 21 when leaving with an Easterly destination.
BERTHING: Ministry of Transport Wharves: Depths are expressed in feet reduced to the chart datum. – Section 5, berth 600 ft. long, 30 ft. depth – Section 6, berth 350 ft. long, 30 ft. depth – Section 7, berth 500 ft. long, 26 ft. depth – Section 8, berth 525 ft. long, 20 ft. depth – Section 9, berth 200 ft. long, 20 ft. depth – Section 10, berth 525 ft. long, 20 ft. depth – Section 16, berth 350 ft. long, 16 ft. depth – Section 17, berth 700 ft. long, 16 ft. depth.

North American Elevators Wharves: Section 11, berth 500 ft. long, 24 ft. depth – Section 12, berth 350 ft. long, 24 ft. depth – Section 13, berth 250 ft. long, 24 ft. depth – Section 14, berth 615 ft. long, 24 ft. depth – Section 15, berth 622 ft. long, 35 ft. depth.

Omnimar Inc. Wharf: Section 18, berth 550 ft. long, 14 ft. depth.

Marine Industries Ltd. Wharf: Section 19, berth 600 ft. long, 20 ft. depth.

Quebec Iron and Titanium Wharf: – Sections 20 and 21, berth 1,100 ft. long, 30 ft. depth.
CRANES: Mobile cranes up to 150 tons capacity available from local firms.
BULK CARGO FACILITIES: Storage space for approximately 10,000 tons available (75,000 sq.ft.).

North American Elevators Ltd. – steel and concrete grain elevator, 5,500,000 bushels capacity. Loading capacity 144,000 bushels/hour.

Quebec Iron and Titanium Wharf – electric mobile bridge, capacity 900 t.p.h.
STEVEDORES: Available for loading and unloading at any berths.
MEDICAL: Doctors and hospitals facilities available.
DENSITY: Fresh water.
FRESH WATER: Available by pipe-line at all berths.
FUEL: All grades available from major oil companies by pipe-line at all deep water berths. Can also be obtained by barges from Montreal (50 miles).
CONSULS: Almost all countries, nearest offices at Montreal.
REPAIRS: All deck, engine and boiler repairs can be effected.
DRY DOCKS: Dry-docking facilities for ships up to 12,000 tons d.w.t.
SURVEYORS: Lloyds.
CUSTOMS: Sorel is a port of entry, customs board ships.
CUSTOMS ALLOWANCES: 200 cigarettes for each man, Officers may be allowed one bottle wine/spirit, Master up to five bottles.
REPATRIATION: Can be arranged through Department of Manpower and Immigration.
AIRPORT: Nearest at Montreal (Dorval) 70 miles.
TIME: GMT minus 5 hours. Daylight Saving Time: GMT minus 4 hours, applied from last Saturday of April until last Saturday of October each year.
HOLIDAYS: New Year's Day, Good Friday, Easter Monday, St. John the Baptist Day, Dominion Day, Labour Day, Queen's Birthday, Remembrance Day, Christmas Day, Boxing Day.
POLICE/AMBULANCE/FIRE: Police/Fire 742-5656; Ambulance 742-9441.
SERVICES: Ship's stores can be secured in Port. Tank cleaning equipment available.
SHORE LEAVE: Crew members allowed ashore. No restrictions.
REGULATIONS: Public Harbours Regulations.
AUTHORITY: Department of Transport, Sorel.

STEPHENVILLE, Newfoundland: 48.30 N. 58.33 W.

(See Plan Book)

PORT LIMITS: Beginning at Indian Head (Long. 48° 29′ 58″, Lat. 58° 31′ 49″); thence running true 210° for 1,700 yards; thence running true 320° for 6,000 yards; thence running true north for a distance of 2,100 yards more or less to the high water mark.
DOCUMENTS:

Completed Declaration of Health
Valid Deratting Certificate
3 Crew Lists (Form 200)
3 Crew Declarations (Form Y14)
3 Ship's Stores (Form E-1)
3 Passenger Lists
Manifests
Clearance from Last Port

PILOTAGE: Compulsory. Pilot boards at Fairway Buoy. Pilot ordered by reporting via any coastal radio station by radiotelephone or radiotelegraph to Pilots, Stephenville. 48, 24 and 12 hr. ETA required. Time used must be GMT. The Pilot at Stephenville guards Channel 16 (156.8 MZ) and works Channel 11 (156.66 MZ).

Harbour Pilot: Capt. Melbourne, Phone: 643-4056 – Stand by Pilots: Capt. W. Collins, Phone: 686-5046, Capt. D. Keeping, Phone: 686-5017.
ANCHORAGE: No sheltered anchorage in the harbour; vessels are exposed to prevailing westerly winds.
RESTRICTIONS: Maximum recommended draft is 30 ft. Daylight sailings only. Channel has least width of 150 ft. with a length of 1.5 miles. Water depth along the berth is 32 ft. with a tidal rise of 3–4 ft. For any changes in depth restrictions, Mariners should obtain copies of the Canadian Hydrographic Services Sailing Directions for Newfoundland and Chart No. 4681.
RADIO: Stephenville Marine Radio, call sign VOJ. Halifax Marine Radio is recommended for all messages.
BERTHING: 1 berth of 960 ft. Also dolphins used primarily for pulpwood discharge can accommodate vessels of over 600 ft. Max. draft at dolphins approximately 22 ft. The largest vessel to enter port has been 640 ft. long and any anticipated larger vessels should be discussed with Port Officials.
STEVEDORES: Ordered by Agent.
MEDICAL: No advance notice required unless serious emergency. Hospital facilities available.
TANKERS: Tanker berth is the main government wharf (960 ft. long). Discharge lines are: one six-inch, one eight-inch and two × ten-inch. The pipe-lines and nearby tanks are owned by Harmon Corporation and are leased to users.
DENSITY: Salt water.
FRESH WATER: Available from pipes on dock at $1.00 per ton. Water pipe is operated by the Town of Stephenville.
FUEL: Marine diesel available. Delivery by truck.
CONSULS: Nearest Consuls are situated in St. John's, which is approximately 500 miles away.
REPAIRS: Minor repairs are possible locally.
OPENING/CLOSING HATCHES: Normally carried out by vessel's crew.
IDENTIFICATION CARDS: Not required.
REPATRIATION: Can be arranged.
AIRPORT: 5 miles from dock.
POLICE/FIRE/AMBULANCE: Police 643-2118, Fire 643-2176, Russell's Ambulance 643–2472, Hospital 643-5131
TELEPHONES: Can be arranged through Newfoundland Telephone Company Limited, Market Division, P.O. Box 98, Corner Brook, Nfld. Phone: 643-3197. Phone jack has already been installed on the dock.
SHORE LEAVE: No restrictions.
GENERAL: Ice is navigable throughout the Winter season. Extra information can be obtained from Ice Operations in Dartmouth, Nova Scotia, telephone 902-426-5664, Cables: Ice Dartmouth.
AUTHORITY: Ministry of Transport, St. John's.

AGENT: At present, the Harmon Development Corporation is acting as agent for the port. Any special arrangements can be made through the corporation, which is a Provincial Crown Corporation. Address: Harmon Development Corporation, P.O. Box 328, Stephenville, Nfld.; attention Mr. J. Cochrane, Phone: 709-643 4056.

SUMMERSIDE, P.E.I.: 46.23 N. 63.47 W.

DOCUMENTS:

2 IMM.200.
3 E.1.
1 Quarantine 2001.
2 Passenger Lists.
1 Customs Document A.6.

PILOTAGE: 24 hours notice of ETA to Agent who notifies Pilot. Pilot boards fairway buoy about 6 miles from wharf.
ANCHORAGE: At fairway buoy in depths of 30-35 ft.
MAX. SIZE: 550 ft. length, 50 ft. beam, 24 ft. draft.
HEALTH: Vessels coming from U.S.A. accepted without pratique. Vessel from other countries radio telephone for permission. See also "Montreal".
RADIO: Halifax N.S., Sydney N.S., Grindstone, M.I.
TUGS: None available.
STEVEDORES: 24 hours notice required.
MEDICAL: Hospital facilities available. Current vaccination/fever certificates required.
FRESH WATER: Available 30 t.p.h.
FUEL: Can be arranged if necessary.
OPENING/CLOSING HATCHES: Crew/Stevedores.
CUSTOMS ALLOWANCE: Tobacco: 1 carton per man per week. Wine/Spirits: Spirits 40 oz. per man per week. Further allowances made if Master requests.
IDENTIFICATION CARDS: Passports required.
REPAIRS: Only minor repairs.
REPATRIATION: Can be arranged.
AIRPORT: Charlottetown Airport 39 miles away.
TIME: Atlantic Standard Time with daylight saving in Summer.
HOLIDAYS: New Year's Day; Good Friday; Victoria Day (19th May); Dominion Day (1st July); Remembrance Day (11th November); Thanksgiving (13th October); Labour Day (1st September); Christmas Day. Plus all Saturday afternoons and Sundays.
POLICE/AMBULANCE/FIRE: Police 436-9222; Ambulance dial "O" call operator; Fire 436-3333.
TELEPHONES: Telephones can be placed on board.
SHORE LEAVE: Crew allowed ashore.
AUTHORITY: Leonce Arsenault, Wharfinger.

SYDNEY, N.S.: 46.09 N. 60.12 W.

DOCUMENTS:
Crew's Declaration Y.14 in triplicate.
Ship's Stores E.1 in triplicate.
Crew Tally IMM.201 in duplicate.
Report Inward A.6 in triplicate.

PILOTAGE: Pilots are obtainable inside Fairway Buoy, 46° 18′ N. 60° 08′ W. Vessels approaching Sydney requiring Pilot must report by radiotelegraph or radiotelephone, estimated time of arrival to District Supervisor of Pilots, North Sydney, Nova Scotia, at least 12 hours before vessel's ETA. The time should preferably be GMT. ETA's must be revised if necessary prior to arrival through VCO Marine Radio Sydney, or via any Coast Radio Station.

ANCHORAGES: South Arm and Northwest Arms (good holding ground 40 to 60 ft. depth).

RESTRICTIONS: Berthing allowed day or night. "Harbour Ice", January to March, "Drift Ice" April to May. Navigable with aid of ice breakers requested from Ice Control at Sydney.

MAX. SIZE: Max. draft 37 ft. Governed by least depth in channel of 38 ft. at low water.

HEALTH: Sydney is an official quarantine station. Radio pratique obtained between 0900 and 1700 hrs. local time by radio message to "Quarantine Sydney". Information required from vessel is as follows:
- Name and nationality of vessel.
- Name of three previous ports called at during voyage.
- Port of destination and name of Agent.
- Nature of cargo.
- Date and place of last derating or exemption certificate.
- Number of crew and passengers.
- Condition of health of all on board with details of any sickness or death occurring during the voyage.
- Vaccination status of crew and passengers.
- The ETA and any other information that may be required by the quarantine officers.

The ship will require usual inspection on arrival. However, radio pratique will enable vessel to enter port, dock and commence loading or unloading operations prior to official quarantine clearance. Vessels which have not applied for radio pratique and all vessels with suspected infectious disease aboard will remain in quarantine until cleared.

RADIO:

Station	*Call Letters*	*Freq. kc/s.*
Sydney Radio	VCO	500
Grindstone Island	VCN	500
Canso Radio	VAX	500
Halifax Radio	VBO	530
Cape Race	VCE	500

TUGS: No Tugs.

BERTHING: *International Steel Piers:* No. 1 Pier (Steel loading); berthing length 425 ft. Depth at low water 28 ft.

No. 2 Pier; berthing length 550 ft. Depth at low water 30 ft. Pipe-line for bunker oil, 6 in.; pipe-line for marine diesel, 4 in.; pipe-line for discharging oil, 16 in.

No. 3 pier; berthing length 710 ft. Depth at low water 41 ft. Equipped to unload cargoes by self-unloading boom type vessels and bulk carriers. Cape Breton Development Corporation, Pier No. 4; berthing length 810 ft. Depth at low water 30 ft. Used exclusively for loading coal and coke. Government Wharf (Sydney); berthing length 974 ft., depth at low water 30 ft.

Point Edward Docks: Main jetty length 850 ft. Depth at low water 36 ft. outside, 27 ft. inside. Seaward jetty length 800 ft. depth at low water 21 ft. Quay wall 1,150 ft., depth at low water 18 ft. Finger jetty, length 350 ft., depth at low water 25 ft. outside, 19 ft. inside.

STEVEDORES: Available by phoning Rowe Freight & Marine Service Ltd., (902) 564–8452 twenty-four hours before ETA of vessel. Mobile cranes available from 12 tons to 75 tons.

MEDICAL: Two hospitals.

DENSITY: Average 1023.

FRESH WATER: Available anytime, supplied through 2.5 in. hose at rate of 25 t.p.h., cost depending on tonnages, from $1.00 to 0.45 cents per ton, plus labour.

FUEL: Marine diesel, bunker fuel and galley fuels are obtainable by pipe-line at piers Nos. 2, 3 and 4. Rate of bunkering approximately 100 t.p.h.

GANGWAY/DECK WATCHMEN: Crew sufficient.

OPENING/CLOSING HATCHES: Crew.

CUSTOMS ALLOWANCE: 200 cigarettes or half a pound tobacco or 15 cigars, each officer. 40 oz. of spirit per officer.

IDENTIFICATION CARDS: Seaman's identity cards.

CONSULS:
British and Canadian Shipping Master.
Portugal Vice-Consul 794-3515.
Honorary French Consular Agent, North Sydney 794-4800.
Norwegian Vice-Consul, Sydney 564-9288.

REPAIRS: Floating repairs by Atlantic Springs Machine and Repair Company or Sydney Engineering and Drydock Company. Largest slipway 3,000 tons. Hull and engine repairs available.

REPATRIATION: Can be arranged.

AIRPORT: Served by Air Canada and Eastern Provincial Airways.

TIME: Sydney is on Atlantic Standard Time from the last Sunday in October to the last Sunday in April, and on Atlantic Daylight Time from the last Sunday in April to the last Sunday in October. GMT minus 4 hours on Atlantic Standard Time and GMT minus 3 hours on Atlantic Daylight Time.

HOLIDAYS: Christmas Day; New Year; Good Friday; Dominion Day; Thanksgiving Day; Labour Day. No work as a rule from 0800 to 0800 hrs. next day.

POLICE/AMBULANCE/FIRE: Police 564-4415; Ambulance 564-5507; Fire 539-3552.

SERVICES: Compass adjusting, tank cleaning.

SHORE LEAVE: Allowed.

AUTHORITY: Harbour Master, W. F. Rowe, Tel: 562–0835.

THOROLD, Ontario: 43.05 N. 79.10 W.

LOCATION: Town on Welland Canal, about 8 km. South of Port Weller and 32 km. North of Port Colborne, both ports being the entrances of the Canal linking Lake Ontario with Lake Erie.

RESTRICTIONS: Channel depth: Maximum permissible drafts in the Welland Canal and approaches is 7.92 m. (26 ft.). Navigation season: April 1 to December 30 on the average.

HEALTH: Incoming vessels obtain clearance at Quebec City when coming from a foreign port.

RADIO: Ship-to-shore communications: Through Toronto (VBG) or Buffalo (WBL).

BERTHING:

Industrial Dock, Wharf No. 5: Type, Coal; Equipment, Self-unloaders; Length, 500 ft. (152.4 m.); Depth, 18 ft. (5.50 m.)

Industrial Dock, Wharf No. 6: Type, Various Bulk and General Cargo Commodities; Equipment, 1–3 ton Crawler Crane, 1–3.5 ton Crawler Crane; Length, Dock Wall 400 ft. (121.9 m.), Berth 1,125 ft. (342.9 m.); Depth, 27 ft. (8.23 m.); Storage Capacity, 100,000 tons.

Ontario Paper Pulpwood Dock, Wharf No. 7: Type, Unloads Pulp and Chemicals; Equipment, 3 Orton Grapple Cranes; Length, 740 ft. (225.5 m.); Dept, 27 ft. (8.23 m.); Storage Capacity, 90,000 Cords Pulpwood.

Ontario Paper Dock, Wharf No. 8: Type, Loads Newsprint; Equipment, 2–3 ton Orton Crane Hoists; Length, 434 ft. (132.3 m.); Depth, 24 ft. (7.3 m.); Capacity, 4,000 tons in Newsprint.

Beaverboard Dock, Wharf No. 9: Type, General and Fuel Oil; Equipment, Self-unloaders or Rental Crane; Length, 1,005 ft. (306.3 m.); Depth, 27 ft. (8.23 m.).

MEDICAL: Maplehurst Hospital, Thorold; St. Catharines General Hospital, and Hotel-Dieu Hospital, both in St. Catharines.

FUEL: Not available.

REPAIRS: Minor repairs possible.

DRYDOCKS: None.

SERVICES: Supplies available.

HOLIDAYS: Customs and Canal officials always available during the season.

AUTHORITY: St. Lawrence Seaway Authority.

TORONTO, Ontario: 43.40 N. 79.25 W.

(See Plan Book)

For important general information refer to "St. Lawrence Seaway".

DOCUMENTS: Master should prepare for boarding of Customs, Immigration Officers:

Customs – Crew Declaration Lists (in triplicate) and Ship Store Lists (in triplicate).

Immigration – Crew List and Passenger List (in duplicate).

PILOTAGE: As required by Great Lakes Pilotage Authority.

ANCHORAGES: Vessels anchor in Humber Bay or in Inner Harbour. Anchorages allotted by the Harbour Master.

RESTRICTIONS: Vessels may enter port area at any time.

MAX. SIZE: The port has facilities to accommodate nearly any vessel which can navigate the St. Lawrence Seaway Locks.

Max. size of vessels permitted to transit the Seaway:
(*a*) Ships not exceeding 730 ft. overall and 75 ft. 6 in. extreme breadth may transit.
(*b*) Masts must not exceed 117 ft. above the water level.
(*c*) Max. draft 26 ft.

HEALTH: See "Montreal".

RADIO: Controlling radio station in the Toronto area is VBG Toronto. A port communications centre is located in the Harbour Master's Office and operated for emergency, safety and operational requirements. Ships entering Toronto Harbour should contact the Toronto Harbour Master's Office for information by radio telephone. Call sign XJF on frequencies:

156.8 mHz – Safety and Calling
156.6 mHz – Working
156.7 mHz – Alternate Working

TUGS: Not normally required but available. Tugs use ship's lines.

BRIDGES: Two bridges – Ship Channel Bridge and Keating Channel Bridge. Both lift bridges, no height restriction.

SPECIALISED CARGO HANDLING FACILITIES: The following companies offer berthage and storage for the bulk commodities indicated:

Liquid Chemicals. Allied Chemical Co., Domtar (no waterside storage tanks, trucked directly from vessel). Liquiterminals at Berth No. 425.

Coal. Rochester & Pittsburg Coal Co.

Cement. Lake Ontario Cement, Canada Cement Lafarge.

Molasses. Canada West Indies Molasses.

Oil. Texaco, Imperial Oil, Sun Oil, Canadian Fuel Marketers, BP, Gulf, Shell, Roy-L Canadian Fuel, Milnes Fuel Oil, Caloil,

Salt. Canadian Salt Co., Sifto Salt, Iroquois Salt.
Chemicals. Domtar.
Sugar. Canada and Dominion Sugar Co.
Vegetable Oils. Drew Brown, Maple Leaf Mills, Victory Soya Mills.
Grain. Toronto Elevators Ltd., Victory Soya Mills; Canada Malting Ltd.

CRANES: Stationary dockside crane, capacity 300 short tons at Marine Terminal 51, floating crane 50 ton capacity and mobile crane 26 ton capacity available.

STEVEDORES: General rule is 24 hours notice.
To work ship at 1300 hrs., order gangs by 1030 hrs. the same day.
To work ship at 1800 hrs., order gangs by 1600 hrs. the same day.
To work ship at 0800 hrs., order gangs by 1530 hrs. previous day.

MEDICAL: Doctor and hospital facilities available.

TANKERS: Diameter of load/discharge lines are the American Standard 8 in. Max. draft at berths is 26 ft.

DENSITY: Fresh water.

FRESH WATER: Available at all berths.

FUEL: In most cases, vessels bunker in Montreal. Fuel available at 12 hours notice, either by road tanker or at oil berths.

Shipmaster's report: Fuel and lub-oils only delivered by road tankers and vessels are not allowed to bunker while alongside Redpath sugar berth. Bunkers not available on Sundays and holidays due to Department of Transportation regulations ruling that no trucks are allowed on highways those days.

GANGWAY/DECK WATCHMEN: Crew member or someone hired by Agent.

OPENING/CLOSING HATCHES: Carried out by stevedores.

CERTIFICATES:
Certificate of Registry.
Articles of Agreement.
Log Book.
Safety of Life at Sea.
Safety Equipment Certificate.
Safety Construction Certificate issued by the Country to which the ship is registered.

CUSTOMS ALLOWANCES: Tobacco, Crew entitlement on first arrival in Canada – 200 cigarettes, 50 cigars, 2 pounds of tobacco. Wine and/or Spirit, Crew entitlement on first arrival in Canada – 40 oz. of spirits, liquors or wines.

CARGO GEAR: Vessel requires a tackle equipment book and a certificate covering cargo equipment which must be kept up to date and notated every 12 months by a competent person. Port of Toronto has modern equipment including stationary Atlas crane, 300-ton capacity; mobile container crane designed for loading and unloading 20 ft. and 40 ft. containers; 56-ton overhead lift truck equipped with a 40 ft. spreader frame. Two additional container handlers and 50-ton floating crane. Private cranes, ranging in capacity from 20 tons to 150 tons are available by arrangement.

IDENTIFICATION CARDS: Visitor passes available from port police office.

CONSULS:
Belgium
Brazil
Colombia
Costa Rica
Cuba
Denmark
Ecuador
El Salvador
Finland
France
Germany
Greece
Guatemala
Israel
Italy
Japan
Lebanon
Mexico
Netherlands
Nicaragua
Norway
Peru
Portugal
Spain
Sweden
Switzerland
Thailand
Turkey
United States
Yugoslavia

REPAIRS: Most repairs not requiring dry dock can be carried out in Toronto. Nearest dry dock is located at Port Weller, 30 miles distant.

REPATRIATION: All facilities.

AIRPORT: (1) Toronto Island Airport located at Western end of harbour. General aviation only with regular airlines.
(2) Toronto International Airport approximately 15 miles distant. Airport is served by nine regular airlines.

TIME: GMT minus 5 hours. Two alterations made to clocks during year (1) Last Sunday morning in April, Eastern Standard Time to Eastern Daylight Time 1 hour ahead. (2) Last Sunday morning in October, Daylight Time to Eastern Standard Time 1 hour back.

HOLIDAYS: Work can be arranged on any holiday at double time rate with the exception of Labour Day which is the first Monday in September of each year. No work is done on this day.

POLICE/AMBULANCE/FIRE: Emergency numbers as follows: Harbour Police 863–2260; Port Police 863–2137; Fire Department 363–2133 or 361–1111; Ambulance 361–1111.

TELEPHONES: Arrangements not available for placing telephones on board.

SHORE LEAVE: No restrictions.

AUTHORITY: The Toronto Harbour Commissioners.

TROIS RIVIERES, Quebec: 46.22 N. 72.34 W.

(See Plan Book)

DOCUMENTS:
2 sets Crew Lists.
2 sets Passenger Lists.
3 sets Customs Documents.
3 copies Health Documents.
6 sets Manifests.
6 sets Bills of Lading.
3 sets Ship's Papers.

PILOTAGE: Pilots take charge of vessel at Quebec for Trois Rivieres destination. See "Quebec" for further information.

ANCHORAGES: No vessel shall, except in an emergency, anchor within the harbour without prior permission from the Port Manager and then only at such place as is assigned. The anchorage area used for Trois-Rivieres is located approximately 2 miles up river.

RESTRICTIONS: Port open to navigation 12 months of the year. From January – March inclusive, vessels should be reinforced for ice.

HEALTH: Trois-Rivieres is a Port of Entry. Port doctor at the service of vessels. See also "Montreal".

RADIO: St. Lawrence River Marine Traffic Control call system letters VBK Trois-Rivieres.

TUGS: Not usually considered necessary for berthing ships. However tugs can be made available upon advance notice.

BERTHING: 22 berths are available, including 12 open and 10 shedded, total 11,254 ft. Private wharves, 3 berths, total length 1,398 ft.

N.H.B. Facilities:

Berth Number (usual name)	*Wharf Length (m.)*	*Depth at LW (m.)*	*Remarks*
1A	152.5	9.1	Paper Loading 1 & 2 Total berthing, length 426 m.
1B	—	—	Paper Warehouse
2	122	9.1	
3	218	9.1	
4	117	7.6	
6	91.5	6.1	Total berthing length 3,430 m. (including 3 private berths)
(NHB Office Wharf) 7	91.5	6.1	
9	218	9.1	
10	166	9.1	
11	218	9.1	
13	176.8	9.1	
14	152.5	10.7	
15	122	10.7	
16	175.3	10.7	
17	221	9.8	
19	221	10.1	
20	221	10.7	
Cap-de-la-Madeleine 21	122.6	9.1	
Ste Angele	75	4.9	

Private Facilities:

Name of Berth	*Length (m.)*	*Depth LW (m.)*	*Remarks*
Canadian International Paper Company's Wharf	226.8	9.1	Receiving pipe-line for bunker oil. Four ×21/2 tons cranes for pulpwood
Consolidated Bathurst (Wayagamack Division) Wharf	103.6	8.5	Receiving pipe-line for Bunker oil

Grain Facilities:

Elevators	*Capacity in tonnes*	*Loading galleries at berth*	*Loading capacity tonnes per hour*	*Remarks*
No. 1				
No. 2				2 Marine legs at Berth 17
	160,000	16	1,500	
No. 3				Unloading capacity 1,960 tonnes per hour

CRANES: Mobile cranes (private) up to capacity 180 tons available.

STEVEDORES: Stevedores available through local stevedoring firms.

MEDICAL: If medical service is required upon arrival, call through No. 7 (St. Lawrence River Marine Traffic Control System). Port doctor. Hospital facilities available.

TANKERS: Diameter of oil lines 8 in. and 12 in. No slop discharge facilities. 7 tanker berths – 5 for 30 ft. draft and 2 for 35 ft. draft.

FRESH WATER: Hoses connected to harbour hydrants at all berths; 20 t.p.h.

FUEL: Certain types of fuel oil, in quantity, supplied to ships by Gulf Oil Canada Ltd. Diesel oil is also available.

GANGWAY/DECK WATCHMEN: Not necessary except if dangerous cargo on board.

OPENING/CLOSING HATCHES: Carried out by stevedores.

CUSTOMS ALLOWANCE: 200 cigarettes each and/or 2 lb. tobacco. Wine and/or Spirits: One bottle each.

IDENTIFICATION CARDS: Seamen's card and/or passport.

CONSULS: At Montreal.

DRYDOCKS: None.
REPAIRS: Minor repairs done by local machine shops.
REPATRIATION: Can be arranged.
TIME: EDST from last Sunday of April to last Sunday of October, then normal EST.
AIRPORT: 5 miles distant. No scheduled flights.
HOLIDAYS: New Year's Day; Easter Monday; Confederation Day; Thanksgiving Day; Christmas Day; Good Friday; Queen's Birthday; Labour Day; Remembrance Day. One Civic Holiday taken June 24th.
POLICE/AMBULANCE/FIRE: Police and Fire 374–3535; Ambulance 375–6456 and 374–6225; Poison Treatment 374–6211.
SERVICES: Compass adjusting only.
SHORE LEAVE: Members allowed ashore.
AUTHORITY: National Harbours Board.

VANCOUVER, B.C.: 49.17 N. 123.07 W.

(See Plan Book)

The port is located in an excellent sheltered natural harbour, open to navigation all year round with a minimum depth of 15 m. in the approach channel and at many berths.
PORT LIMITS: The seaward boundary of the inner port within which a vessel is considered to be an "arrived vessel" is a line drawn between Port Atkinson and Port Grey at the entrance to English Bay. The seaward boundary of the outer port is running North-South between the North Arm of the Fraser River and the International Boundary and being 5 miles offshore in the Straits of Georgia.
DOCUMENTS: The following documents are required to be prepared prior to arrival:

- 3 copies Canadian Customs Form E1-List of ship's stores.
- 3 copies Canadian Customs Form Y14-List of crew's possessions.
- 3 copies List of ship's slop chest stores for sale.
- 3 copies Canadian Immigration Form 200-Crew List.
- 1 copy Canadian Quarantine Form CS1.

Manifests and other documents are prepared by the Agent.
PILOTAGE: Pilotage is compulsory. Pilots board at the Fairway Buoy off Victoria, Vancouver Island. ETA to be sent to "Pilots Victoria" at least 12 hrs. before arrival and confirmed 4 hrs. before arrival. Distance to Vancouver – 135 kms.

Victoria Traffic Separation: Vessel Traffic Separations schemes are in effect – Straits of Juan de Fuca and Georgia Strait. VTM Systems are under the control of the US Coast Guard (Seattle Traffic) and the Canadian Coast Guard (Vancouver Traffic) within the respective territorial limits.
ANCHORAGE: There are 25 designated anchorages in the port which are available during periods of congestion. 18 in English Bay, 5 in main harbour and 2 above Second Narrows. Main Harbour anchorages reserved mainly for vessels awaiting berths or tides. Those outside mainly reserved for vessels expecting long waits. Main Harbour anchorages range from 9 to 21 fathoms and English Bay anchorage from 8 to 16 fathoms. Largest vessels using and expected to use Vancouver Harbour can be accommodated at all anchorages. Holding ground is good and anchorages are protected. Requests for permission to anchor must be made to the Harbour Master. Requests may be made through the First Narrows Signal Station.
RESTRICTIONS: Min. depth at LW is 15.23 m. at the First Narrows. Min. clearance at HW is 60.36 m. under First Narrows Bridge. Min. depth at LW is 12.77 m. at the Second Narrows. Min. clearance at HW is 44.21 m. under Second Narrows Bridge. Vessels can only transit Second Narrows at slack water. (All Oil Terminals and Pacific Coast Bulk Terminal lie above the Second Narrows.)

Vessels carrying dangerous goods, tankers, combined carriers, must obtain special clearance from the Harbour Master prior to entry and/or departure.

Canadian Coast Guard maintain and operate the Vessel Traffic Management System.

All International and National pollution controls are strictly enforced.
MAX. SIZE: Berthing for vessels up to 150,000 d.w.t. and draft up to 60 ft. at Roberts Bank.
HEALTH: *Quarantine Regulations:* Vessels need only apply by radio (Station VAK), where a condition of health irregularity is suspect, or the vessel has called at a country listed under the World Health Organisation as being infected with smallpox, or plague, or has an expired derat certificate.
RADIO: VAI/Vancouver Coast Guard Radio.
VHF: VAS/Vancouver Traffic located just North of the First Narrows Bridge. Manned 24 hours per day. Pilots on radio/telephone contact with Vancouver Traffic at all times. Vessels normally communicate on Channel 12 from Iona Jetty/Cape Roger Curtis inwards. Other frequencies available for communication are 16, 6, 14 and 11.
RADAR: Vancouver Traffic continuous radar surveillance from Point Grey/Point Atkinson inward Second Narrows. Anchorage assistance available.
TUGS: Meet vessels East of First Narrows and off berth. Ship's lines are used. Pilots communicate with tugs by VHF Channel 11 or Channel 6.
BERTHING: Five large vessel Inner Harbour anchorages for vessels awaiting Grain Inspection/Clearance etc., for a maximum period of 48 hours and 19 large vessel anchorages in English Bay for vessels awaiting to berth are available.

Terminal	No. of Berths	Total Length (m.)	Min. Depth (m.)	General Description
Pier B–C	4	654	8.6	Passenger Terminal Cargo Sheds and General Cargo
Centennial/ Ballantyne	10	1,842	9.8+	1 Container Crane 40 MT, Cargo Sheds 1 Fixed Derrick, 300T, Track Cranes; 3×5T, 1×8T
Vanterm	5	1,313	10.67	1 Grain Berth 2 Container Berths 1 General Cargo Berth 1 Ro/Ro Berth Container Cranes 2×40T Cargo Sheds Containers General Cargo and Bulk Tallow
Lynnterm	3	732	15.23	Cargo Sheds, General Cargo, Forest Products
Terminal Dock	3	480	9.17	Cargo Sheds, General Cargo, Reefer Cargo
Seaboard International Terminal	3	580	12.2	Forest Products
Cassiar Terminal	2	263	10.0	Asbestos/General
Neptune Terminal	3	717	15.23	Coal, Potash, Phosrock, Rape Seed Oil, Afalfa Pellets
Vancouver Wharves	5	950	10.7	Ore Concentrates, Forest Products, Sulphur, Potash, Methano
Pacific Coast	2	386	13.7	Coal, Sulphur, Phosrock
Westshore Terminals	1	305	20.0	Bulk Coal
United Grain Growers Elevator	2	427	8.27	Grain
Pacific Elevators	3	440	7.66	Grain
Alberta Wheat Pool	2	639	10.67	Grain
Saskatchewan Wheat Pool	2	521	12.2	Grain
Pioneer Grain Terminal	2	Under Construction		Grain
B.C. Sugar Terminal	1	145	8.23	Sugar Gantry Cranes
Goodwin Johnson	3	455	10.33	Lay-by berth, log loading
Hooker Chemical Dock	1	153	11.0	Salt, Caustic Soda
Imperial Oil Ltd.	1	165	10.7	Petroleum Products
Shell Canada	1	122	9.8	Petroleum Products
Gulf Oil Ltd.	1	130	8.0	Petroleum Products
Chevron Canada Ltd.	1	122	10.6	Petroleum Products
Transmountain Oil Pipeline Ltd.	1	90	13.0	L.P.G.

There are a number of smaller terminals used principally by the coastal ferry and towing services.

BULK HANDLING FACILITIES:

Grain Elevator	*Capacities*	*Belts*	*Average Rate Loading/Belt*
*U.G.G.	3,645,000 bu.	2	350 t.p.h.
Pacific Elevator 1, 2	5,243,100 bu.	4	350 t.p.h.
Vanterm 1	1,868,000 bu.	2	275 t.p.h.
*Alberta	7,300,000 bu.	4	325 t.p.h.
*Saskatchewan	5,250,000 bu.	2	1,000 t.p.h.
*Pioneer Grain	4,000,000 bu.	2	1,000 t.p.h.

*(Additional storage capacity is now under construction)
CRANES: Fixed crane capacity 300 tons, floating cranes, 45, 75 and 100 tons and mobile cranes of 150 and 250 tons available.
STEVEDORES: Gangs normally ordered day before ship's arrival, can be ordered same day for afternoon or evening work.
MEDICAL: All services available.
DENSITY: Density varies in different sections of harbour, according to times of year.
FRESH WATER: Available at most berths or by barge. Hose supplied. Delivery 25 t.p.h.
FUEL: Fuel and diesel oil in any quantity available to ships at oil company's wharves, or delivered by tank barge alongside. Gulf Co.,

Home Oil Oil Co., Imperial Oil Co., Shell Oil Co., Texaco Canada Ltd., and Standard Oil Co. of B.C. have stocks of bunker fuel oil, intermediate diesel oils, and light and medium marine diesel oils.
FIRE PRECAUTIONS: All vessels carrying dangerous materials to have suitable towing wires over offshore bow and offshore quarter.
CONSULS: All major countries represented in Vancouver.
GANGWAY/DECK WATCHMEN: If required, employment arranged through Agent.
OPENING/CLOSING HATCHES: Normally carried out by stevedores, except in cases of bulk carriers.
REPAIRS: All types of engine and deck repairs.
DRY DOCKS: Available. Max. capacity 12,000 tons.
AIRPORT: Half hour from Vancouver International Airport.
TIME: Pacific Standard Time GMT minus 8 hours. Clocks will be adjusted to Summer Time (plus 1 hour) when advised.
HOLIDAYS: New Year's Day*; Good Friday; Easter Monday; Victoria Day; Dominion Day; Labour Day*; Thanksgiving Day; Remembrance Day; Christmas Day*; Boxing Day*.
*No cargo work these days.
POLICE/AMBULANCE/FIRE: Police 684–7111; Ambulance 879–4511; Fire Vancouver FI–1234; Air-Sea Rescue 732–4272; Harbour Board Police 689–3441.
TELEPHONES: Are placed on board vessels at all berths.
GENERAL: Vessels not permitted pump bilges or discharge oil, contaminated ballast or galley refuse into water. Every vessel boarded on arrival by Harbour Patrol Personnel and furnished with applicable excerpts from Harbour by-laws.
SERVICES: Stevedore companies equipped with tank cleaning equipment. Sludge barge available. Services of compass adjuster may be obtained.
SHORE LEAVE: No restrictions, but Immigration will advise of any special circumstances where restrictions might be enforced.
AUTHORITY: National Harbours Board.

VICTORIA, B.C.: 48.25 N. 123.22 W.

DOCUMENTS: See Vancouver".
PILOTAGE: Pilots embark at Victoria for all British Columbia ports. Pilot station within 2 mile radius of buoy in position 48° 22′ 45″ N. 123° 24′ 56″ W. Radio Pilots Victoria through radio station VAK giving ETA at least 12 hours and confirmed 4 hours before arrival.
ANCHORAGE:

"A"	48° 23′ 46″ N.,	123° 26′ 58″ W.
"B"	48° 24′ 09″ N.,	123° 27′ 36″ W.
"C"	48° 24′ 14″ N.,	123° 26′ 43″ W.
"D"	48° 24′ 24″ N.,	123° 25′ 54″ W.
"E"	48° 24′ 44″ N.,	123° 26′ 37″ W.
"F"	48° 24′ 54″ N.,	123° 26′ 00″ W.

Anchor berths "A", "C" and "D" have a swinging radius of 1,500 ft. and "B", "E" and "F" 1,200 ft.
HEALTH: Quarantine Officials board with the Pilot. Advise Agent of ETA.
RESTRICTIONS: Outer Harbour: depth 35 ft. MLLW. Inner harbour: depth 21 ft. MLLW. Largest vessel to use the port, length 575 ft. draft 34 ft.
VHF: Pilot station. VAK.
TUGS: Available.
BERTHING:

Berth	*Length* (ft.)	*Depth* (ft.)	*Remarks*
Ogden Point "A" N. Side	800	35	For handling lumber, pulp, paper, plywood and general cargo. Fresh water available at 20 t.p.h.
Ogden Point "A" S. Side	1000	35	
Ogden Point "B" N. Side	800	35-40	Grain elevator presently undergoing demolition – dock will be used for time being as required. The South side is used for loading lumber. Fresh water available at 20 t.p.h.
Ogden Point "B" S. Side	800	33-35	

STEVEDORES: 13 gangs available. Refer "Vancouver" for holidays, etc., arranged by Agent.
MEDICAL: Doctors and hospital facilities available.
DENSITY: Salt water.
FRESH WATER: Available at wharves.
FUEL: Supplied by barge from Vancouver.
CONSULS: Norway.
CUSTOMS ALLOWANCES: See "Vancouver".
SURVEYORS: Lloyds at Victoria – located at Yarrow Ltd.
GANGWAY/DECK WATCHMEN: Crew are required to act as deck watchmen.
OPENING/CLOSING HATCHES: By crew or stevedores.
CARGO GEAR: Ship's gear.
REPATRIATION: Possible, arranged by Agent.
AIRPORT: International Airport 19 miles from Victoria.
HOLIDAYS: 11 statutory holidays, however work can be arranged.
POLICE/AMBULANCE/FIRE: Available at dockside 24 hours a day.
REPAIRS: All repairs facilities available.
DRY DOCK: At Esquimalt: Length 1,173 ft.; breadth 125.6 ft.; depth 49.5 ft.
TELEPHONES: Can be arranged through Agent.
SERVICES: Compass adjusting possible.
SHORE LEAVE: Allowed.
IDENTIFICATION CARDS: Seamans' book sufficient.
AUTHORITY: Dept. of Transport, Harbour Master.

WELLAND, Ontario: 42.58 N. 79.13 W.

LOCATION: Industrial city on the Welland Canal, 5 nautical miles below Lock 8.
DOCUMENTS: See "Montreal".
RESTRICTIONS: Navigation season: April 1 to December 30 (usually). Channel depth: Controlled at 8.23 m. (27 ft.) in canal channel.
HEALTH: See "Montreal".
RADIO: Ship-to-Shore communications through Toronto (VBG) or Buffalo (WBL).
BERTHING: New Welland Dock, Wharf 10. Length of wall 182.9 m. (600 ft.). Berth 222.5 m. (730 ft.). Depth alongside 9.14 m. (30 ft.). Type of facility, self unloaders and rental cranes.
SURVEYORS: A.B.S. at Toronto.
AUTHORITY: St. Lawrence Seaway Authority.

WEYMOUTH, N.S.: 44.27 N. 66.01 W.

DOCUMENTS:
3 Crew Lists.
3 Passenger Lists.
3 Customs Documents.
3 Health Documents.
3 Manifests.
Ship's Papers.
PILOTAGE: Ship's Agent contacts vessel through Marine Radio Station, Yarmouth and notifies Pilot, who will then be on lookout. Ship gives standard whistle signal for Pilot, who boards about 2 hours before high tide. In meantime, ship should ride at anchor about quarter mile N.W. of Fairway Buoy. No special pilot boat. Boat used for Pilot is 35 ft. fishing boat.
ANCHORAGE: Good safe anchorage outside harbour in 33 ft. over mud. Also quarter mile N.W. of Fairway buoy.
MAX. SIZE: Max. length permissible 375 ft. Breadth, no limit. Draft, approx. 26 ft. of water at high tide.
TUGS: No tugs required. The fishing-boat will run lines to wharf if required.
BERTHING: North Weymouth, L-shaped wharf 280 ft. in length, and leg 40 ft. width. Depth alongside 9 ft. low water.
STEVEDORES: Available. Experienced loading lumber and pulpwood.
MEDICAL: Hospital: at Digby, 20 miles distant. Ambulance can be arranged.
FRESH WATER: Available; delivery by truck.
DEVELOPMENTS: Redredging of channel in near future. Dates not finalised.
GANGWAY/DECK WATCHMEN: No watchmen necessary.
TIME: Eastern Standard Time GMT minus 5 hours. Daylight saving time from last week-end in April to last week-end in October, clocks advanced 1 hour.
POLICE/AMBULANCE/FIRE: Police 245–4162; Ambulance 245–2205; Fire 837–5142.
TELEPHONE: No arrangement for placing telephones on board ship. Telephone available near dock.
AUTHORITY: Dept. of Transport, Harbour Master.

WINDSOR, Ontario: 42.19 N. 83.03 W.
(See Plan Book)

For important general information refer to "St. Lawrence Seaway".
DOCUMENTS:
Sanitary Health Certificate – fixed on outside of container for agriculture plant protection. 1 paper affixed to each container.
Meat locker Certificate.
Quarantine Certificate.
3 Crew Lists.
3 Passenger Lists.
3 Stores Lists.
Manifest – 3 A.6 – 2 A.6 out.
Bill of Lading.
Valid Smallpox Certificates.
PILOTAGE: Pilots board ships at Sarnia Eastbound and Port Weller Westbound.
ANCHORAGES: Windsor Harbour Anchorage lies approximately half mile North of Fighting Island marked by 4 white buoys, showing flashing white lights, an area of 800 ft. wide and 0.75 of a mile long. Depth of 5.5 to 6 fathoms.
MAX. SIZE: Can handle any ship the seaway passes. No tide.
HEALTH: In the case of vessels arriving via the St. Lawrence River

radio pratique may be obtained from Quarantine Quebec. See also "Montreal".

RADIO: WFS Detroit Marine Radio.

RADAR/VHF: No radar service. Harbour Master may be contacted on VHF Channel 16.

TUGS: Only on rare occasions is tug necessary.

STEVEDORES: Advice as to number of gangs should be received no later than 1600 hrs. on day preceding.

MEDICAL: Four hospitals.

TANKERS:

British American; hoses = 8 in. Max. depth 19 ft.
Shell Canada; hoses = 8 in. Max. depth 19 ft.
Petrofina; hoses = 8 in. Max. depth 22 ft.
Imperial Oil; hoses = 8 in. Max. depth 18 ft.
Sterling Fuels; hoses = 14 in. & 10 in. Max. depth 27 ft.

Slop tanks available – Sterling Fuels only.

DENSITY: No tide, the water is fresh.

FRESH WATER: Tank truck delivery.

FUEL: Tank truck delivery. All grades – 24 hours notice. Coal bunkering dock available 24 hours per day. No notice.

FIRE PRECAUTIONS: Fire Dept. requires man at tank installations ashore while pumping, also notify Fire Dept. re any spillage.

GANGWAY/DECK WATCHMEN: Not required, but can be supplied.

OPENING/CLOSING HATCHES: Normally done by the stevedoring company.

CUSTOMS ALLOWANCE: See "Montreal".

IDENTIFICATION CARDS: I.D. cards should be carried.

CONSULS: U.S. Consul, tel. 253–5203. Italian Consul, tel. 256–0092.

REPAIRS: All repairs above water can be carried out.

AIRPORT: Windsor Airport approximately 5 miles. Regular flights 7 days a week by Air Canada.

TIME: GMT minus 5 hours from October to April. DST subject to local vote.

HOLIDAYS: The following are the legally observed holidays; however, vessels will be worked on these days at prevailing rates: Christmas, New Year, Good Friday, Victoria Day, Dominion Day. Civic Holiday, Labour Day, Thanksgiving and Veteran's Day.

POLICE/AMBULANCE/FIRE: Police 253–4211; Fire 254–2881; Ambulance 945–2391.

TELEPHONES: Phones can be placed on board.

GENERAL: Fluctuation of water level; high Westerly wind drops water level. Detroit River Light should be contacted for water gauge on VHF 16 for upbound ships, and Belle Isle Coast Guard Stations on VHF 16 for downbound ships.

SERVICES: Tank truck available for tank-washings, also radio telephone and radar service. Compass adjustor not available.

SHORE LEAVE: No restrictions on shore leave.

AUTHORITY: Port of Windsor, Windsor Harbour Commission.

NOTES

Please also advise Shipping Guides Ltd.

Canary Islands

ARRECIFE: 28.57 N. 13.33 W.

PILOTAGE: Pilot meets vessel 1,000 m. off the port.

Minor port of island of Lanzarote. Port situated to the South of the town, and consists of 3 moles:

Muelle Viejo:	200 m. long.
Muelle Pesquero de Naos:	300 m. long.
Muelle los Marmoles:	700 m. long.

The first 2 quays named above are both suitable for fishing vessels. Muelle los Marmoles is the principal berthing quay, for all commercial traffic, with a depth alongside of between 8 to 15 m. Fuel, gas oil, and fresh water available by pipe-line.

Two tugs of 250 h.p. available. From Las Palmas.

Small slipways up to 400 tons capacity available, also workshops for minor repairs.

AUTHORITY: Commandancia Militar de Lanzarote.

LAS PALMAS: 28.05 N. 15.27 W. (See Plan Book)

DOCUMENTS:

5 Crew Lists.

4 Transit Passenger Lists.

2 Provisions Lists.

8 Copies of Manifest, with Bills of Lading covering cargo for Las Palmas.

8 Lists of Passengers Disembarking.

Passports of passengers landing (required by Immigration Authorities).

1 Maritime Health Declaration.

PILOTAGE: Compulsory. Masters send radio message to Agents 48 hours prior to arrival giving ETA (GMT). Pilot station may be contacted by VHF Channel 16, 155.56 kc/s. Call for Pilot by whistle, 2 long and 1 short blasts, "G" flag during day; white over red signal during night. Sound signals prohibited from 2200 to 0800 hrs. local time. Pilot boats have black hull, white wheel house, with black "P" and boat number painted both sides of wheel house; they fly "G" flag with black "P" on centre. Pilot boards approximately 1 mile off breakwater, where vessel should await Pilot.

ANCHORAGE: Good anchorage in roads. Sandy bottom. Mean tidal range 5 ft. to 6 ft. Tidal velocity negligible.

RESTRICTIONS: No tide restrictions. Vessels berth alongside mole day and night in accordance with draft.

Vessels carrying explosives or dangerous products must apply to the Port Authority, through their Agent, with sufficient advance notice, regarding permission to enter port. These vessels berth at the extreme Southern end of Quay (Berth Nos. 17–19).

MAX. SIZE: Vessels of any length and beam can safely berth and normally discharge and load cargo while bunkering. Max. allowable draft 42 ft.

RADIO: Las Palmas Radio, call sign EAL.

TUGS: The following tugs are available: harbour and/or salvage tugs *Gran Canaria*, 2,800 i.h.p.; *Tamaran*, 2,375 i.h.p.; *Aracus*, 2,200 i.h.p.; *El Guanche*, 1,375 i.h.p.; *Nublo*, 1,060 i.h.p.

Harbour tug: *Doramas*, 1,375 i.h.p.

BERTHING: Subject to availability. Information should be radioed to Agent 48 hours prior to arrival, if berthing required, and for what purpose. Harbour approach from open sea with no impediments.

Generalisimo Franco Mole: Runs North/South, approximately 2,000 m. long. This quay is normally used by vessels bunkering and is fitted with bunker and fresh water line connections along its entire length.

Height of quay above LW averages 4.5 m. Average rise and fall of tide 2.5 m.

Vessels lie safely alongside at the following maximum drafts:

Berths 1–14 (Northern part)	36 ft. 0 in.
15–16	34 ft. 0 in.
17–18–19	41 ft. 6 in.

Vessels using berths 1 to 14 with drafts between 34 ft. and 36 ft. must enter and clear between half and full tide.

La Luz Mole: This quay is used mainly for cargo operations and has a total of 1,200 m. of berthing space.

A grain silo is situated at the North end of the quay. Maximum draft for berthing at the silo is 32 ft. Two connections for discharge of edible oils to the local refinery are also on this quay. Maximum drafts alongside the connections are 39 ft. and 32 ft. respectively; at the latter connection there is a length restriction of 150 m. Two cold storage installations are situated on this quay.

Fish Mole (Espigon del Castillo) and Ribera Mole: These 2 quays are used mainly by fishing vessels and coastal cargo vessels. Four cold storage installations are situated on the Fish Mole.

Santa Catalina Mole: A terminal for passenger/car ferries is presently under construction at this quay, with Ro/Ro ramps.

BULK CARGO FACILITIES: Grain silo with 4 extractors. Rate 50 t.p.h. for each extractor. Draft alongside 32 ft. Cement silo with 2 extractors.

STEVEDORES: Loading and discharging of general cargo can normally be carried out day and night, including Saturdays, Sundays and holidays.

Stevedoring labour works on a 6-hour shift system, 4 shifts per 24 hours. The shifts commence at 0800, 1400, 2000 and 0200 hrs.

It is important that Masters of vessels arriving to discharge or load cargo should keep their Agents closely informed of their ETA, particularly in the case of night-time and weekend arrivals. The Agents will then be in a position to ensure that a suitable berth, and stevedoring labour, will be available.

Labour for daytime shifts on ordinary working days can be arranged 2 hours before commencement of each shift. Labour for the night shifts must be arranged no later than 1730 hrs. Labour for weekend shifts must be arranged no later than 0630 hrs. on Saturday.

CRANES: Floating crane with capacity of 70 tons and mobile cranes up to 125 tons capacity.

MEDICAL: Master should advise Agent if medical attention required on arrival. Hospital and ambulance services available day and night. Vaccination and inoculation available any time but notice should be given prior to arrival.

TANKERS: No facilities for slop discharge. Crude oil tanker berth.

FRESH WATER: Available at any mole delivered by hose at rate of approx. 50 t.p.h. per hose, while bunkering and/or loading/discharging cargo.

Also available by barge at anchorage.

FUEL: Masters to include in messages to Agents amount, grade and viscosity of oil required, and name supplier, 48 hours prior arrival.

Bunkers supplied 24 hours. Fuel oil, diesel and gas oil available ex-wharf, rate 1,000 t.p.h.

GANGWAY/DECK WATCHMEN: Recommended. Arranged by Agents.

OPENING/CLOSING HATCHES: Performed by stevedores.

CUSTOMS ALLOWANCE: No restrictions for tobacco, wine and/or spirits.

IDENTIFICATION CARDS: Not necessary.

CONSULS: The following countries have Consular Representations at Las Palmas:

Argentina
Austria
Belgium
Brazil
Colombia
Cuba
Chile
Denmark
Dominican Republic
El Salvador
Finland
France
Great Britain
Germany (Fed. Republic)
Gambia
Greece
Guatemala
India
Iceland
Italy
Japan
Korea
Lebanon
Liberia
Mauritania
Monaco
Nicaragua
Norway
Netherlands
Panama
Peru
Portugal
Philippines
Senegal
Sierra Leone
Syria
South Africa
Sweden
Switzerland
United States of America
Uruguay

SURVEYORS: The following Classification Societies have resident appointed Surveyors at Las Palmas: American Bureau of Shipping, Lloyd's Register of Shipping, Nippon Kaiji Kyokai, Registro Italiano Navale, Bureau Veritas and Germanischer Lloyd.

REPAIRS: All types of deck and engine repairs carried out afloat.

DRYDOCK: Wharf length 560 m. depth 8-16 m. Syncrolift platform, lifting power 9,500 tons, suitable for vessels up to 190 m. length, 30 m. beam and 30,000 g.r.t. 5 mooring points of 180 m. and 2 of 220 m.

REPATRIATION: All facilities for crew changes, repatriation by sea and air.

AIRPORT: International Airport 26 kilometres South of Las Palmas.

TIME: GMT in Winter. Summer-time is GMT plus 1 hour.

HOLIDAYS: Local holidays: 29th April; 8th September; National Holidays: 1st January; 6th January; 19th March; 1st May; 18th July; 1st November; 8th December; 25th December; Feast Days: Maundy Thursday (half-day); Good Friday; Ascension Day; Corpus Christi.

Cargo handling during holidays and feast days; no stevedoring labour available from 2000 hrs. from day prior to Good Friday, Christmas Day and 1st January, until 0800 hrs. on following day.

POLICE/AMBULANCE/FIRE: Police, 260715. Ambulance, 245921. Fire, 243100.

TELEPHONES: Line connected to vessels alongside wharves from Harbour Board exchange if required.

SERVICES: (Special) Underwater hull cleaning, painting, surveys are carried out in clear water in outer harbour. Compass adjusting, etc.

SHORE LEAVE: Permitted. For some nationalities, passes must be issued by immigration authorities.

DEVELOPMENTS: A new outer breakwater is in an advanced stage of construction. This runs North/South, parallel to the Generalisimo Franco Mole, and approximately 1,000 m. to the East of it. The new breakwater, when completed, will be about 3,200 m. long.

The new harbour area thus created contains at the Northern end, the Synchrolift drydock and repair installation which is already operational.

Two new quays (denominated EN 1 and EN 2) are already in use. EN 1 is exclusively for cargo handling, and an extensive container park has been provided. At EN 2, a new terminal and Ro/Ro ramp has recently been inaugurated.

This outer area of the harbour is protected from Southerly weather by a newly constructed jetty heading N.E. from the Southern point of the Generalisimo Franco Mole, and will in due course provide further Ro/Ro ramps and also deep-water berths for large vessels.

AUTHORITY: Port Commandant, Comandancia de Marina.

AGENTS: Miller Y Cia, SA, Muelle Santa Catalina, (PO Box 12), Las Palmas, Canary Islands. Telex 95353 Midat E and 95153 Midat E. Tel. 26.08.50 (10 lines). Telegrams "Miller Las Palmas".

LAS SALINETAS:

Private loading quay for nitrogen and fertiliser factory about 10 miles South Puerto de La Luz, Las Palmas, only used by vessels loading or discharging for Compania Insular del Nitrogeno, S.A.

Accommodation one mole 145 m. length, depth alongside 7.5 to 15 m. Fresh water available.

SANTA CRUZ DE TENERIFFE: 28.28 N. 16.16 W.

(See Plan Book)

DOCUMENTS:

6 Crew Lists.
6 Passengers in Transit Lists.
8 Passengers Landing Lists.
7 Cargo Landing Manifests.
2 Stores Lists.
1 International Health Declaration.
1 Free Pratique.

If no passenger or cargo landing, must present negative declarations.

PILOTAGE: Compulsory. Recommended give Agent 48, then 24 hours notice of ETA. Contact Pilot station by VHF Channels 14 or 16. Pilot station located at shore end of Muelle Norte. Pilot boards up to 2 miles off extreme end of Muelle Sur. In daytime Pilot cutter identified by blue flag with white "P" superimposed; night-time, red and white light. When Pilot cutter unable proceed out of harbour due heavy weather, Pilot awaits in lee of extreme end of Muelle Sur. Pilots called by VHF when entering (Channels 16 and 14); on sailing called by local Agent, or by blowing "C" on ship's whistle.

ANCHORAGE: Vessels proceeding to anchorage are conducted by Pilot. Anchorage outside breakwater in depths 10 – 40 fathoms.

RESTRICTIONS: No berthing or sailing from floating pipe-line discharge terminal between 1800 and 0600 hrs. At Dique del Este, vessels over 70,000 d.w.t. berth in daytime only.

MAX. SIZE: Floating pipe-line terminal, up to 200,000 tons d.w.t. Dolphins, up to 45,000 d.w.t. Dique del Este (old part), max. length 200 m. and draft 39 ft. 6 in. (new part), 700 m. long with 300 m. LOA limitation, draft up to 54 ft.

HEALTH: Free pratique not granted by radio. "Q" Flag must be flown until vessel cleared inward by Port Health Authorities, which procedure is very quick. If suspected disease or fever on board, Agent or Port Health Authorities must be notified by radio.

RADIO: Teneriffe Radio – call sign EAT working frequency 472 kc/s. Short-wave EAT 3 working frequency 1930 to 0830 hrs., 8742 kc/s. Short-wave EAT 4 working frequency 0830 to 1930 hrs., 13092 kc/s. Radio telephone call sign "Teneriffe Radio" working frequency 1740 kc/s.

There is a 24-hour telephone link with vessels within 100 miles range, which vessels may utilise by calling Teneriffe Radio on VHF Channel 16 for connection to Agent's telephone number.

TUGS: Join vessels entering approximately half mile to 1 mile from extreme end of Muelle Sur. Use of tug's lines optional, but when supplied by the tug, extra charges incurred.

Tugs normally available; *Punta Anaga*, 1,900 i.h.p.; *Orotava*, 1,900 i.h.p.; *Tacoronte*, 1,800 i.h.p.; *Guimar*, 1,800 i.h.p.

BERTHING:

Dique del Este: 650 m. length, depth alongside 18 m.; 295 m. length, depth alongside 12 m.; 80 m. length, depth alongside 10 m. Quay used by tankers, ore carriers, container vessels and grain carriers. Water and bunkering facilities available.

Dique Muelle Sur: 803 m. length, depth alongside 12 m.; 213 m. length, depth alongside 10 m.; 240 m. length, depth alongside 8.50 m. Bunkering and fresh water connections available. Quay used by passenger vessels and vessels bunkering.

Muelle de Ribera: 537 m. length, depth alongside 10 m.; 301 m. length, depth alongside 8.50 m.

Quay used by Roll-on/Roll-off passenger-car ferries from the mainland which have preference. Bunkering and water facilities available.

Fishing Harbour: Total length 960 m. Depth alongside 20 ft. Bunkers are supplied by road tanker and water available at certain points along the quay.

Muelle Norte: 103 m. length, depth alongside 8 m. Bunkers and water available.

CRANES: *Muella de Ribera:* Seven 6-ton electric Portal cranes and eight 3-ton Portal cranes.

Muelle Norte: Two 6-ton electric Portal cranes.

STEVEDORES: Monday to Saturday gangs ordered at 0600, 1200 and 1800 hrs. On Sunday there is only one shift from 0800–1400 hrs. and gangs for Sunday work must be ordered at 1300 hrs. on Saturday. Telegraphic information from Masters to be despatched 48 hours prior arrival giving first ETA. Gangs work three 6-hourly shifts, viz. 0800–1400, 1400–2000, 2000–0200 hrs. Fourth shift from 0200–0800 hrs. by special request. Orders to be made by 1900 hrs. All necessary gear supplied by stevedores.

BULK HANDLING FACILITIES: Grain silo situated at entrance to East Mole, max. discharge rate per extractor, 200 t.p.h. Two extractors available and can work 24 hours a day. It is only used for government department imports. All other shipments are discharged by grabs at the South Mole.

MEDICAL: Masters to advise by radio if medical attention required on board. Yellow fever and smallpox inoculations possible in daytime subject prior notification.

TANKERS: Local refinery (Compania Espanola de Petroleos SA) have ample couplings, hoses and reducers. Slop facilities available. Tankers discharge at Floating Pipeline Terminal, and at Dique del Este.

Loading terminals situated at Dique del Este, at Puerto Honduras (used mainly for LPG and refined spirit loading), for 45,000 d.w.t., and 2 berths at extreme end of Muelle Sur.

Shipmaster's Report: Cepsa Buoy Berth Dique del Este.

Mooring Operation: Vessel 190,000 d.w.t.

1647 hrs. – Pilot boarded vessel, swung and proceeding inwards. Starboard anchor veered to 2 shackles in water and taken out of gear.

5 Tugs in attendance as follows.
1 Starboard Quarter Ship's Rope.
1 Port Quarter Ship's Rope.
1 Port Bow Ship's Rope.
1 Pushing Starboard Bow.
1 Pushing Starboard Quarter.

1751 hrs. – Let go Starboard Anchor, finished up with 10 shackles.

1802 hrs. – 2 lines to Buoy No. 6.

1814 hrs. – Lines to Buoys No. 1 and 2.

Mooring continues:

1943 hrs. – Vessel in position.

2022 hrs. – Final rope to buoys. Tugs away, Pilot departs. (12 ropes all told).

2028 hrs. – All fast and secured.

Total mooring time from let go anchor to all fast 2 hours 27 minutes.

Berth Information: The berth consists of a series of 7 buoys laid in water which varies in depth from 30 to 60 m., the stern buoys are attached to the breakwater by means of heavy chains.

A total of 12 parts of synthetic or natural fibre mooring lines is required.

Wire moorings are not permitted, the reason being that the buoys have no Quick Release Gear and the depth of the water is such that heavy wires could not be lifted off the hooks by hand.

The Starboard anchor is also used with about 10 shackles in the water when the vessel is in position.

The berth is suitable for tankers of up to 200,000 d.w.t.

The discharge system consists of a string of floating hoses to the portside, 2 cargo and 1 bunker/diesel, the former requiring 12 in. and the latter 8 in. connections.

Bunker C Diesel and Marine Gas Oil is available.

Pilot boards about 1.5 miles South of the breakwater.

5 tugs are used for berthing, 3 make fast using ship's ropes, the other 2 pushing as required.

4 tugs are used for unberthing, but do not make fast.

The prevailing wind is from a N.N.E. direction and quite strong gusts can be experienced. It is necessary to load ballast simultaneously with the discharge of cargo, in order to keep the windage area within reasonable limits.

A terminal operator is on board at all times and in contact with the shore by VHF.

Berthing carried out between 0800–1800 hrs. only.

DENSITY: About 1025.

FRESH WATER: Available at all berths, delivered by hose any time day or night. Water barge available daytime to supply vessels at anchorage, 400 tons capacity. May be available at night-time at extra cost. If water delivered by barge, there is an additional charge for towage of barge each way.

FUEL: All grades available from CEPSA (cables "Spanoil Madrid" and/or "Teneriffe"). Fuel available at all berths, average rate of loading 500-600 t.p.h. Bunkers at anchor can be supplied by bunkering barge *Mayorga*, 1,400 tons capacity, or *Ciudad Rodrigo*, 4,300 tons fuel; 1,300 Gasoil or diesel. Notice required for refuelling 72 hours, to be confirmed at 48 and 24 hours before arrival.

FIRE PRECAUTIONS: All tugs equipped fire-fighting equipment including foam and 4 water/foam monitors. Refinery well equipped with shore fire-fighting equipment, including mobile foam trucks.

GANGWAY/WATCHMEN: Available but not compulsory.

HATCHES: Normally opened by crew, stevedores lifting beams. If whole operation carried out by stevedores, extra charge possible.

CUSTOMS ALLOWANCE: Free port, no restrictions presently in force.

REPAIRS: NUVASA, offer a new system in slipways, the synchrolift, lifting capacity 2,000 tons, and vessels up to max. 83 m. LOA can slip at their yards, where there is space for 14 vessels at a time. Dry docking can be effected day and night.

Their workshops can carry out major repairs to ships afloat, including engine and boiler work, and is equipped with modern machinery.

SURVEYORS: Lloyds and A.B.S. available at Las Palmas. NV available in Teneriffe.

REPATRIATION: All facilities available for repatriation and crew changes. Daily air flights to Madrid and Europe.

AIRPORT: International Airport situated 12 km/s. from port, served by Iberia, KLM, Air France, Lufthansa, British Caledonian and others. Daily flights to and from most European capitals.

TIME: GMT in use throughout year. In 1974 Summer-time (GMT plus 1 hour) introduced for first time.

HOLIDAYS: 1st January; 6th January; 19th March (St. Joseph's); Easter Thursday; Good Friday; 1st May; 15th May; 25th May; 5th June; 29th June; 18th July; 25th July; 15th August; 12th October; 1st November; 8th December; 25th December.

No work 1st January, Good Friday, and Christmas Day. Other holidays worked as overtime.

POLICE/AMBULANCE/FIRE: Police 271217; Ambulance 241502; Fire 242349.

TELEPHONE: Facilities exist for connecting telephones on board.

SERVICES: Underwater hull cleaning, tank cleaning-compounds (Basic Chemicals, etc.), compass adjusting.

SHORE LEAVE: No restrictions, except for Crew members of East European countries, who must obtain Identification Cards from local Immigration.

IDENTIFICATION CARDS: Not required. For citizens of East European countries local Immigration will deliver Identification Cards, which should be returned to Agent before sailing.

CONSULS:

Austria
Belgium
Bolivia
Brazil
Chile
Denmark
Dominican Rep.
Ecuador
Finland
France
Germany
Great Britain
Italy
Liberia
Monaco
Netherlands
Norway
Paraguay
Portugal
Sweden
Uruguay
Venezuela

DEVELOPMENTS: The South mole is to be lengthened to over 1,000 m. with depth alongside of 8–12 m. (completion 1978).

Container Berth, length 300 m. depth 10 m. (completion 1978). New drydock to be constructed at Granadilla for vessels of 350,000 d.w.t.

AUTHORITY: Marine Commandant, Santa Cruz.

AGENTS: Miller Y Cia S.A., Marina 39 (P.O. Box 79), Santa Cruz de Tenerife, Canary Islands. Telex 92143 MIDOC E. Tel. 289100. Telegrams "Miller Tenerife"

NOTES

Please also advise Shipping Guides Ltd.

Republic of Cape Verde

ST. VINCENT: 16.53 N. 25.00 W.

PORT LIMITS: Inside of a direct line running from Pta. Joao Ribeiro to Pta. do Morro Branco.

PORT: Porto Grande at 16° 52′ 55″ N. 25° 00′ 25″ W. City: Mindelo.

HARBOUR: Porto Grande is a natural semi-circular harbour sheltered and safe, facing island of Santo Antao over a channel approximately 10 miles wide at nearest points. In this channel but nearer St. Vincent is the rock of Ilheu dos Passaros on which is a lighthouse. Entry to harbour is from North to South. Weather conditions throughout year usually good to excellent.

DOCUMENTS: On arrival Masters should hand to Agent:

3 Crew Lists.
3 Passenger Lists.
1 Maritime Health Declaration Certificate.
1 copy Stores List.

Port Doctor will also wish to sight ship's Deratisation Certificate.

When discharging cargo a minimum of 5 copies of Bill of Lading and 5 copies of Manifest are required. No special form for Passenger Lists and Crew Lists, and those in general use by the vessel will be accepted.

PILOTAGE: Radio notice of ETA must be sent by Master to Agent at least 48 hours before arrival. Pilot boards mid-way between Bird Island (Ilheu dos Passaros) and the Quay. The Pilot prefers to use Jacob's ladder. Signal for Pilot is 2 long and 1 short blast on ship's whistle. However, sound signals prohibited between 2000 and 0800 hrs. local time. Time between Pilot boarding to vessel's anchoring or berthing at piers is 10 to 45 minutes. See "Radio".

Important: The Harbour Master requests Masters not to anchor in harbour before Pilot on board. Pilots available day and night. Pilotage compulsory for all vessels entering harbour for anchoring, or berthing. When sailing, pilotage not compulsory for vessels which anchored in harbour. Pilotage compulsory for all vessels berthing and unberthing at piers.

ANCHORAGE: Anchorage berth in 4 to 20 fathoms.

MAX. SIZE: The harbour of Porto Grande can accommmodate vessels up to any size. Also see "Berthing" and "Tankers".

HEALTH: Free pratique can be obtained before arrival on application by radio to Guarda Mor (port doctor) of Sao Vicente de Cabo Verde confirming that crew are in good health. The port doctor, however, usually boards vessel on arrival in company with police and Customs guards, order provide any medical assistance which may be required. Crew and passengers should be in possession of Smallpox Vaccination Certificates. Production of these certificates will not, however, be called for unless there is a very good reason for doing so.

RADIO: Advice of ETA should be sent by radio to Agents at least 48 hours prior to entering port. Bunker and water requirements, if any, should also be requisitioned in same message. Cash to Master, provisions, cigarettes, spirits, etc., should be also added. ETA message should also advise number of hatches to be worked and number of tons in each hatch.

St. Vincent radio operates on CQA–500 kc/s. and 8.738 mc/s. 24 hours a day – working frequency 435 kc/s. on 8 mc/s. Listening every 2 hours over the hour and again each half hour on the hour. Pilot station may be contacted on VHF Channel 13-16.

BERTHING:

Pier No.	*Max. Depths metres*	*Length of Pier metres*
1*	11.50	310.00
2	11.50	310.00
3	9.50	160.50
4	9.50	160.50
5	8.50	90.00
6	6.50	122.00
7	4.50	61.50
8	3.50	106.75
9	3.50	40.00
10	4.50	100.00
11	5.50	100.00

(*This pier is open to the sea and usable subject to prevailing winds and swell).

Floating and suspended fenders are available at the piers. Suspended fenders are each of 3 lorry tyres, 3 ft. wide with a diameter of 2 ft. 6 in. suspended at intervals of 70 ft. Floating fenders are of 5 tyres with a wooden core and are 4 ft. 6 in. long and 3 ft. 6 in. in diameter and are placed at intervals between the suspended fenders. Cruising vessels normally berth at pier No. 2 Max. draft 33 ft.

Height of Pier No. 2 above sea level approximately 2 m. Vessels moor port side to pier. No shore gangways available. Cruising vessels with drafts too deep to berth alongside piers can anchor in harbour about 1,250/1,500 m. distance from Custom House pier where passengers may land. Ship's launches must be used for the transport of passengers to and from shore. With tug assistance vessels may berth or unberth at any time of day or night at piers Nos. 2, 3 and 4, but in adverse weather or other adverse conditions berthing at night may be prevented. Berthing and unberthing at night at other piers generally not possible.

STEVEDORES: If quantity for loading or discharging is of 10 tons or under, and in comparatively small parcels, then cargo can be loaded or discharged using the only small lighter available for vessels at anchorage. If larger quantity to be handled vessel must berth alongside quay. In both instances ship's tackle must be used.

Discharging rate for bagged cargo, i.e. flour, rice, etc., is about 30 t.p.h. per hatch. In all cases vessel's derricks and winches are used. There are no lighters available, therefore as described above all cargo in excess of 10 tons must be loaded or discharged at the piers. The opening/closing of hatches is the responsibility of the crew on board, but can be done by the stevedores by arrangement with the Master under the supervision and responsibility of the ship's officers.

TANKERS: Max. length 775 ft.; max. draft 36 ft. Underkeel clearance 4 ft. Max. d.w.t. 53,000 tons.

Discharge effected by barge from starboard side of tanker at anchorage, also through submarine pipe-line in harbour at: Lat. 16° 53′ 30″ W. Long. 25° 00′ 50″ W. length of line, 1,000 m.; diameter, 20 in.; berth, Buoys; hoses 12 in.; number of hoses, 7; position of hose connections, midships starboard side; Max. rate per hour, 2000 metric tonnes; density of water at berth 1025.

Submarine pipe-line buoy berth. Tankers moored to 1 forward buoy and 3 stern buoys. Tanker also uses port anchor which is dropped before tying up to buoys. Nature of bottom is coarse sand and gravel. Berthing at buoys carried out 24 hours a day and port tugs of up to 1,200 h.p. used always on berthing and on unberthing according to weather conditions.

Cleaning tanks: 50 miles from shore only.

Gas freeing: At present no facilities available.

FRESH WATER: Can be supplied at anchorage or at piers or ex lighter day or night. Water suppliers request at least 48 hours notice giving quantity required. A minimum charge covering costs of supply of 20 tons is made on supply for under that quantity. To supply over 750 tons during a 12-hour stay in port with 2 lighters, giving between 25 to 50 t.p.h per hose, would be difficult. Connections of hose couplings from water barges are 3 in. male, 11 threads per in.

FUEL: Oil bunkering carried out ex lighter at anchorage at rate of up to 300 t.p.h. dependent upon speed at which vessel can receive. Both fuel and diesel oil bunkers can be supplied at the piers. Gas oil can be supplied in drums to vessel at anchorage or in bulk ex pipe-line on piers. All bunkering at anchorage ex barge takes place on starboard side of vessel.

GANGWAY/DECK WATCHMEN: Two Maritime Police are always in attendance and are compulsory.

CUSTOMS ALLOWANCES: Tobacco and Wine and/or Spirits, no restrictions within reason.

CONSULS:

Belgian (Vice-Consul)
Danish (Vice-Consul)
Netherlands (Vice-Consul)
Norwegian (Consul)
Swedish (Vice-Consul)
Venezuelan (Belgian Consul acts in a friendly capacity).

REPAIRS: At present voyage repairs of limited scope carried out, but slipping facilities are available for craft up to 250 tons only. Facilities expected to improve in the near future.

REPATRIATION: Facilities exist for effecting crew changes by air, but recommend that TAP Lisbon be contacted by Owners for crew making flights into Sal Island order join vessel St. Vincent. Agents should also be informed to make necessary arrangements for flight on local plane from Sal Island to St. Vincent. All crew travelling to Cape Verde must have transit visa issued by Portuguese Consul in country of origin. All crew, except cases for hospitalisation, must be in possession of a passport before Portuguese police will permit them disembark for repatriation. Crew possessing valid passports or sailors' books can land in Cape Verde for medical and/or hospital treatment or for repatriation to country of nationality provided it is country with whom Portugal has diplomatic relations and provided Agents of vessel take full responsibility on behalf of Owners for all expenses.

AIRPORT: Airport served by Dove planes for inter-island service only. 20 flights a week in and out of St. Vincent, 4 direct from Praia and 6 via Sal Island inwards. 5 via Sal and 5 direct Praia outwards. Main Airport is at Sal Island where 5 flights a week by Boeing 727 call to and from Lisbon. At Sal Island the only hotel is situated at the Airport.

TIME: One hour behind GMT all the year round.

HOLIDAYS: New Year's Day (1st January); National hero's day (20th January); St. Vincent's Day (22nd January); Women Day (8th March); Workman Day (1st May); Childrens Day (1st June); National Independence Day; (5th July) Nationality's Day; (12th September); Christmas Day (25th December).

Although offices closed on holidays, loading and discharging of vessels not generally affected.

POLICE/DOCTOR/AMBULANCE/FIRE: Contact police on board or local Agent.

AUTHORITY: Capitao Tenente, Capitania dos Portos.

NOTES

Please also advise Shipping Guides Ltd.

Chile

GENERAL INFORMATION

ARRIVAL ADVICE: Ship's Masters are required to give the Captain of the Port 24 hours notice of arrival, stating time and date in their radio messages. They should also inform their Agents of ETA.

The telegraphic address of the Captain of the Port at all Chilean ports is "Maritgob". Should there be no radio station in the port of destination, the nearest station must be used, and an acknowledgement of the message received. This will justify the non-arrival of the message at destination in time.

The radio message should include the following information:

1. ETA (hour and date).
2. Number of passengers.
3. Number of bags of mail for the port (or negative).
4. State of health on board.
5. Draft.

Reporting: All vessels within Chilean waters (200 miles) must report their position, course, speed and destination each day at 0800 hrs. and 2000 hrs. via the radio stations of: Antofagasta, Valparaiso, Talcahuano or Punta Arenas, according to whichever may be the nearest. Any vessel unable to establish communication with any of the radio stations quoted, must give account to the Maritime Authority by the quickest means at its disposal, reporting the causes for it. In all cases where it is bound for a Chilean port, the vessel must inform or ratify these causes to the corresponding Maritime Authority at that port.

DOCUMENTS: The standard ALALC forms are required, and must be made out in Spanish. The number of documents required by each port varies, but the maximum likely to be required is shown below, unless otherwise stated under the port "Document" heading.

	First Port	*Each Subsequent Port*
General Health Declaration	1	
Clearance	1	1
Clearance Declaration (Alalc No. 1)	3	2
Crew List (Alalc No. 3)	20	20
Crew Personal Effects	3	3
Passenger List for Port or negative (No. 4)	15	8
Passengers in Transit (or negative)	6	4
Mails List or negative	6	4
Store List (No. 5)	20	20
Manifest for Port	20	20
Manifest for in Transit Cargo	20	20
General Cargo Manifest (No. 2) (all on board)	3	see note
Declaration of Arms and Munitions	2	see note

Note: The General Cargo Manifest should be presented in triplicate at the first port and should list all cargo on board, whether intended for Chile or otherwise. A copy of all the documents above is stamped and returned to the Master for retention on board, and must be presented to the Authorities at all subsequent ports of call.

The Port Captain will wish to see all the standard ships papers, and also the receipt for payment of Chilean Light Dues, which is valid for 12 months as from date of issue.

Store List. Separate lists must be made for cabin stores and deck/engine room stores.

Documents required on sailing: 1, Clearance; 2, Health Declaration signed by Health Authority; 3, Two Crew Lists; 4, Passenger List; 5, Receipt for Light Dues; 6, Arms Declaration; 7, Permit for coasting cargo if required.

On sailing, all hatches must be tightly closed. The sailng permit is valid for 24 hours but no cargo operations can be carried out after it is granted. If the vessel has not sailed within 24 hours, the clearance papers must be returned to the Port Captain for new despatches to be issued.

HEALTH: All vessels arriving from abroad are required to call at one of undernoted ports for free pratique: Arica, Valparaiso or Punta Arenas. Vessels are also allowed to call direct to Tocopilla, Iquique, Antofagasta, Coquimbo, San Antonio, Talcahuano and San Vicente.

Vessels can be exempted from call at one of these ports, and proceed direct to the port of loading and/or discharge provided permission is obtained, with 8 days notice from National Health Service.

Following details in order to apply for exemption on behalf of a vessel are required:

Name and flag of vessel.
Net registered tonnage.
Last port of call.
Cargo carried, or if in ballast.
Port of arrival in Chile and date of arrival.

FLAG: All vessels arriving in Chilean ports must fly their own ensign and also the Chilean Flag, from the highest mast.

On entering port the "Q" flag should be flown until pratique is granted.

The use of whistles or sirens in port must be strictly in accordance with the Rules for The Prevention of Collisions.

RADIO: There are 69 radio stations down the coast. Meteorological Bulletins are broadcast regularly by the following stations: Antofagasta, Valparaiso, Talcahuano, Puerto Mont, Punta Arenas.

Notices to Mariners are transmitted from Valparaiso, Punta Tumbes, Puerto Montt, Corona Lighthouse, Punta Arenas and Punta Delgada.

For weather forecasting the coast is divided into six zones:

Zone 1. Arica to Coguimbo;
Zone 2. Coguimbo to Constitucion;
Zone 3. Constitucion to Guafo Island;
Zone 4. Guafo Island to Evangelist Isles;
Zone 5. Evangelist Isles;
Zone 6. From 60° S. to 90° S.

The forecasts from Zone 1 to 5 covers the coast to 120° W. Zone VI includes the area between 53° W. and 90° W.

Chile is normally 4 hours behind GMT, but from the 2nd Saturday in October to the 2nd Saturday in March clocks are advanced 1 hour. However radio transmissions will continue to use GMT minus 4 hours.

ETA advices are best made using GMT.

FUMIGATION: If a vessels Derating Certificate is overdue an Exemption Certificate may be granted provided traces of rats are only slight, and no ports infected by Bubonic Plague have been visited recently. Fumigation can be carried out by the Farming and Cattle Bureau. In such cases the vessel anchors in the inner port or roads, all crew are landed for a period of 24 hours, and the fumigation carried out before the vessel is berthed.

STEVEDORES: Under Chilean law, all foreign vessels are required to employ gangs of shore riggers to rig gear, open and close hatches and carry out all the work normally attributed to the deck crew whilst the vessel is in port. A minimum of 8 men and a foreman must be employed, and remain on board constantly. If the ships crew do the work, the shore riggers must still be paid.

There are no stevedoring companies in Chile, and the Agent must pay for and supervise the operation. The stevedores are considered as employees of the shipowner, and any damage caused to ship or cargo will be for the shipowners account. The ship or Agent is not permitted to select stevedores, who are drawn from a union pool on a rota system, experienced and inexperienced men alike.

It is necessary to employ a gangway watchman for 24 hours a day in all ports.

The Customs or Port also place a watchman.

Cleaning of wharves. The cost of cleaning alongside is for account of the vessel in discharge, or shipper when loading. The Port will do the work and make the corresponding charge.

HOLIDAYS: The following are public holidays: January 1, New Year's Day; April 12th, Good Friday; April 13th, Easter Saturday; May 1st, Labour Day; May 21st, Navy Day; June 29th, St. Peter and St. Paul; September 18/19th, Independence Day; October 12th, Discovery of America; November 1st, All Saints Day; December 8th, Immaculate Conception; December 25th, Christmas Day.

Work in the ports is possible on all of these, paying overtime, except for January 1st, May 1st, September 18th and December 25th. On December 24th and 31st work may cease earlier than usual.

CREW: Signing on of new crew members is restricted to Chilean members of the local Seaman's Union. To sign on a foreign crew man is difficult.

A crew member absent without leave from his ship for 48 hours or more is considered a deserter, and the Port Captain must be notified.

Landing Permits are required by all crew members. The one pass is valid for all Chilean Ports for 30 days. At the last port all Permits must be returned to the Authorities.

Curfew: There is a strict curfew in all ports. Infractors are arrested, and released the following day after paying a fine or doing a days hard labour. The crew should be warned of this as it could lead to their missing their ship. Curfew ends in all ports at 0530 hrs., unless otherwise noted.

FUEL: No clause guaranteeing bunkers can be accepted in any charter party affecting Chilean Ports. The department of Maritime Transport must approve all requests for Bunkers. Such applications must be made 30 days in advance. Furthermore, heavy duties are levied on bunkers, which make Chilean ports very expensive, and should be used only in an emergency. Bunkers can only be obtained ex-pipe-line from Salinas, Valparaiso, and San Vicente. Small quantities can be obtained by truck in other ports.

POLLUTION: It is expressly forbidden to throw overboard any ballast, rubbish or waste, or to spill petroleum or any derivative or residue, contaminated waters from mineral processing plants or any dangerous or noxious substance of any kind either into ports or Chilean jurisdictional waters (200 miles limit) without prior authority from the Port Captain: Standing regulations stipulate that no tanker may dump hydrocarbons within fifty miles of the coast, and that no vessel may pump bilges or dump waste within 10 miles of the coast.

Should there be any accident leading to contamination of waters, this decree authorizes the uses of any means which may be necessary to ensure the protection of natural resources.

Under Article 188 of this Decree all vessels navigating in Chilean waters, or entering any port must have on board an Insurance policy against all risks of contamination, if they are carrying any cargo of petroleum or derivatives; this must insure against all risks whether through leakage, spillage or otherwise. Any infraction of these regulations carries a fine of from 1,000 to 1,000,000 gold pesos and vessels are also responsible for the total elimination of the contaminating element, even if the contamination is due to fortuitous reasons.

SHIPMASTER'S REPORT: July 1977.
PASSAGE THROUGH THE STRAITS OF MAGELLAN, WEST TO EAST:
Master's Remarks: It should be borne in mind that I have written this report on what this vessel actually went through also other than tidal streams and recommended tracks all the observations are from personal experience. I feel that other Masters should only treat this as a guide.
Documents: Since this is a free passage area vessel is not required to stop anywhere in the Straits for the purpose of Customs or Immigration hence no special documents are required.
Pilotage: Magellans Straits have been officially declared as a non-compulsory pilotage zone, hence no Pilots are required for transitting the Straits but in case vessel is calling at any port within the limits of the Straits then pilotage is compulsory and Pilots have to be embarked at Valparaiso or at Punta Dungeness on the Atlantic coast entrance. Through personal experience I feel that other than unexpected bad weather in the Straits, the services of a Pilot are not essential. Please note that this vessel transitted the Straits without Pilot and the vessel's draft was 41 ft.
Weather: The weather between the Straits remains relatively calm and the wind direction follows the passage of the Straits, however there are sudden wind shifts which the mariner must be very careful about, in the open areas like Paso Ancho and area West of Cabo. Forward strong winds could be experienced sometimes gale force, this of course depends upon the movements of depressions in the Pacific. This vessel transitted the Straits in the month of July and following least temperatures were observed (air temperature 6° C; sea temperature 8° C).
Anchorages: There are no recommended anchorages for a vessel of this size but smaller vessels could find safe anchorages in many creeks which follow along with the main Strait, in the bay joining First Narrows (Premero Angustora) and the Second Narrows (Segundo Angustora) one could anchor but again the tidal streams are very strong and the area is not well surveyed or charted, I noticed most of the points did not tally with the radar distances so great care should be exercised.
Tidal Streams: Tides are of a great importance when transitting through the Straits, especially in the narrow portions of the Strait. It is recommended even in the sailing directions to keep a close watch on change of direction of flow of water. The best direction is to work out high waters at Punta Arenas and Banco Direcion, then from there two to three hours later or before the flood or ebb in the Narrows start. Vessels making passage from Pacific to Atlantic should thus endeavour to arrive off Punta Arenas at high water and then proceed at best possible speed towards Second Narrows where ebb tide begins about 2/3 hours later thus the whole passage from Punta Arenas to the sea is made with tide assisting the vessel, going against the tide could lead to bad results as in places streams attain a speed of 8 knots, conversely vessel transitting from Atlantic to Pacific should enter First Narrows 3 hours before high water at Banco Direcion thus they will be aided with the flood tide. In the Narrows the streams run along the main Strait but immediately after leaving Straits they fan out thus there is a good possibility that vessel might drift either to the North or to the South so careful check on bearings should keep the vessel in check. Similarly when the streams enter the Narrows they converge from all sides thus creating tide rips which affect the steering. In the other parts of the Straits Westward of Punta Arenas the tides and currents are not very strong but again care should be exercised when transitting the Paso Tortuso.
General Navigation: When the vessel is approaching the Straits from the Pacific coast side it is highly advisable to make landfall at Cabo Raper light (46° 50′ S., 75° 38′ W.) as the land around it is well identifiable and very radar conspicuous. Please note that land South of this point is very irregular and charted improperly. Once assured of this position, vessel can steer safely keeping at least 15 miles off coast. An important point to bear in mind in this area is that there are no stellar observations available so a good landfall is absolutely essential. Whilst proceeding South there are 2 good radar observation points but again they come very faded on radar, prior to entry into the Straits the Islas Evangilitas Light should be visually picked up again. Please bear in mind that the island which the light is on seems to be incorrectly charted so great care should be exercised. Once sure of the vessel's position, course should be altered and the recommended track laid on the chart should be followed. When the vessel is due South of the light it tends to drift Southwards so careful check on bearings is the best guide. Once past Cabo Pilar the best path will be to follow the charted courses and keep as far as possible in the centre of the Straits. From Cabo Pilar to Paso Tortuso the vessel maintains her course well, but once in the Paso Tortuso care should be exercised as there are numerous shallow patches and the whole portion is covered with tidal rips. It is recommended that this passage should be attempted only in daytime.

Once clear of this pass, courses should be steered as per recommended track, also at this point speed must be reduced or increased to arrive off Punta Arenas at high water. The passage Southwards is practically clear of all dangers but in Paso Frorward strong Westerly winds should be expected. Once past Cabo Frorward Light the vessel enters Paso Ancho which is quite a wide bay, but again strong winds can be expected here. One can safely manoeuvre here so as to arrive off Punta Arenas at high water. Once off Punta Arenas at high water the vessel should be put on maximum speed and steered on the recommended tracks, bearing in mind that off Punta Magdalena Light the vessel tends to drift Eastwards so adequate set should be allowed. Once past the Light the vessel keeps drifting onto the banks Eastwards of the course so set should be allowed. Once off the light buoy marking the bank, the vessel suddenly starts drifting to the opposite side, i.e. Westerly direction, so a careful check of visual bearings will keep vessel in check. Once off Cabo San Vincente Light the vessel could again be steered on recommended courses as the streams follow the main course of the channel. From Second Narrows to First Narrows this vessel maintained her course without sets but off Triton Bank she drifted Northwards, again near the entrance to First Narrows the vessel drifted Northwards. When approaching First Narrows visual bearings should be taken frequently to keep a check on vessel's position or there is a good likelihood of vessel drifting Northwards towards Bajo Satellite, in fact one supertanker ran aground here three years ago and was stranded on this bank for nearly 2 months.

Once inside the First Narrows the recommended tracks should be followed but again off Punta Delgada Light the vessel tends to drift Southwards so adequate set should be allowed. After clearing this end of the Straits the passage is relatively simple, only the tidal streams should be watched. I also recommend that vessels more than 35 ft. draft should not venture close to banks off Punta Dungeness as due to heavy swell there is a good chance of hitting the hard bottom. The safest way is to go South around the bank. The vessel making passage Westwards should arrive at First Narrows 3 hours before high water at Banco Direcion and make the passage with flood tide which means vessel will have the streams from behind. Again I mention at this stage that vessels proceeding Westwards should keep clear of all dangers mentioned above and can expect opposite results to those encountered when on Eastwards passage.
Requirements: Magellans Radio should be informed when passing Evangilitas Light, Paso Tortuso, Second Narrows and First Narrows and eventually passing Punta Dungeness when Eastbound and conversely when Westbound. Masters making this passage should be well versed in Spanish language or carry a dictionary on board as all navigational warnings, weather messages and correspondence with radio station is in Spanish. All radio stations on the Pacific coast transmit weather in Spanish.

In conclusion I feel and recommend that the passage between Punta Arenas and Punta Dungeness is safer during dark hours as the coast is not properly charted thus radar gives erroneous radar bearings but visual bearings with shore lights is very accurate. Secondly, I recommend passage through Paso Tortuso only in daytime, all other passages from Cabo Pilar to Paso Tortuso could be done at any time if vessel is equipped with a good radar. I also recommend this passage for all vessels as one can save nearly 400 miles steaming round Cape Horn also avoid the high seas and swell normally encountered there.

ANTOFAGASTA: (including La Chimba Cove)
23.39 S. 70.25 W.

DOCUMENTS: See "General" before first port.
PILOTAGE: Compulsory. Pilot should be awaited in position bearing 239° and 480 m. from the beacon at the head of protected mole. The Pilot will not board before 0700 hrs., and if the vessel is at anchor an extra charge will be made for heaving aweigh while the Pilot is on board. The accommodation ladder must be rigged for the Pilot. Pilot can be contacted by VHF.
ANCHORAGE: About 1,200 m. from green light on coast mole. Vessels that do not go into port anchor in what is known as "old or outer port" where best anchorage is bearing 103° from anchor painted on hillside, about 5 cables from coast in 37–22 m. of water.

Small vessels anchor about 4.5 cables from old passenger quay in 22–18 m. of water. Ships should use two anchors and follow the indications of the port pilot.
RESTRICTIONS: From May to July the surge is stronger and results in rough seas which last from 2 to 4 days interrupting the traffic of small craft.
MAX. SIZE: A, B and C have a permissible draft of 30 ft. D is restricted to 27 ft:

Berth No. 1 – 15 ft.
Berth No. 2 – 29 ft.
Berth No. 3 – 30 ft.
Berth No. 4 – 32 ft.
Berth No. 5 – 36 ft.

La Chimba Cove: Situated about 5 miles North of Antofagasta. The port entrance is 2 cables wide. Max. length 150 m. Draft 30 ft. Vessels use both anchors, and moor to two stern buoys on each quarter. Ship's head 345°T. A further line is sent from the port bow to the shore.
RADIO:

Station Call Sign	*Category*	*Frequency*	*Type*	*Receives*	*Transmits*	*Schedule*
Antofagasta	(P)	8 Mc/s.	A1	8354,		
CBA 3				8374	8730	H00–30
		4 Mc/s.	A3	4091.6	4396.6	H30–45
		8 Mc/s.	A3	8230	8780	H45–60

Also see "General" before first port.
TUGS: Available.
BERTHING: Inner dock measures 4.5 cables long N. to S. and 2.5 cables wide at entrance.

Water is 10 m. deep alongside berths No. 2 to 5 and A to D, except number 1 berth which has only 5 m. of water.

CRANES:
8×5 ton mobile cranes on berths A to D.
4×3 ton cranes No. 2 berth.
3×5 ton cranes No. 3 berth.
6×3 ton cranes Nos. 4 and 5 berths.
1×35 ton heavy lift crane No. 5 berth.

TANKERS: Buoy moorings for tankers, owned by Standard Oil, Shell and Copec.
Standard Oil Mooring: Max. length 170 m. Max. draft 28 ft. Flexible hoses. One 10 in. line for products. One 12 in. line for fuel oil.
The Copec Buoy: Max. length 180 m. Max. draft 30 ft. fwd., 34 ft. aft. 10 in. lines for fuel oil and clean products. Max. pressure 150 p.s.i.
Shell Buoy: Max. length 200 m. Max. draft 40 ft. 8 in. flexible hose for products and luboils.

Vessel berths using both anchors forward and lines to 3 mooring buoys astern. Hoses lifted midships on port side. No slop disposal facilities.

La Chimba Cove: A 6 in. hose is brought on board on the starboard side. Discharge rate 180 cu.m./hr. 250 p.s.i.

STEVEDORES: Available. 240 stevedores, divided into gangs of 9 men (permanent). 70 stevedores (replacements), 280 longshoremen, 275 dockworkmen, 50 permanent riggers, 25 replacement riggers. Working hours are 0800–1430, 1500–2200. Sundays and holidays one shift only available. Also see "General" section before first port.

MEDICAL: Hospital with 600 beds, also a sanatorium (Rest Home).

FRESH WATER: Port has 42 standpipes of 2.5 in. situated at the various moles. Delivery is at the rate of about 10 t.p.h.

FUEL: Coal: in case of necessity can be obtained in limited quantities. Fuel and diesel oil supplied by Standard Oil, Shell Mex and Copec from petroleum terminals. For quantities less than 70 tons diesel oil can also be supplied from tank cars on the mole. Also see "General" before first port.

GANGWAY/DECK WATCHMEN: Crew.

OPENING/CLOSING HATCHES: Done by Stevedores.

IDENTIFICATION CARDS: Required.

CONSULS:
Argentina
Belgium
Bolivian
British
Columbian
Dutch
Ecuadorian
El Salvador
French
German
Greek
Guatemalian
Hondurian
Italian
Norwegian
Panamanian
Peruvian
Spanish
Swedish
U.S.A.
Venezuelan
Yugoslavian

REPAIRS: There are 2 shipyards for repair of small craft, also several workshops, and foundries.

REPATRIATION: Facilities available.

AIRPORT: The airport is at Cerro Moreno 23 km. to the North of Antofagasta.

TIME: Local time GMT minus 4 hours.

HOLIDAYS: See "General" before first port.

SHORE LEAVE: Allowed.

REGULATIONS: It is prohibited to anchor between Paita rock and the extreme North of the protected mole. Zone for explosives and inflammables: these must be discharged at Caleta La Chimba and vessels take a Pilot who boards at Antofagasta.

AUTHORITY: Empresa Portuaria de Chile.

ARICA: 18.23 S. 70.20 W.

PORT LIMITS: Ships are considered "arrived vessels" the moment they drop anchor within the safe anchorage zone indicated on the chart, or at the Pilot station.

DOCUMENTS: See "General" before first port.

PILOTAGE: Compulsory. Ships approaching port should fly international signal flag "G" to request Pilot. Pilot boat is small craft painted white, with "P" or "H" flag on the mast. Pilot boards incoming vessels at Pilot station, located 3 cables and 165° from red light at end of breakwater. If more than one ship is awaiting Pilot, vessels are requested to hoist, below the flag "G", a numeral, indicating order of arrival, especially if arrived overnight. Vessels waiting to be docked can anchor in Road at Pilot station in 10 fathoms of water. Pilot station maintains a VHF watch.

ANCHORAGE: Safe anchorage for vessels arriving after sunset can be found in a line bearing 194° Faro Isle Alecran distance 7 cables in depths varying from 9 to 10 fathoms.

RESTRICTIONS: Port officially closes at 2100 hrs.; however, if necessary, ships docked and undocked at any time, weather permitting, if application presented in advance to port Captain.

MAX. SIZE: Six berths available within port area. They are numbered from East to West.

Berth	Vessel Max. Length m.	Vessel Max. Draft ft.
Berth No. 1	114	13
Berth No. 2	200	16/20
Berth No. 3	200	26/30
Berth No. 4	170	32.5
Berth No. 5	170	34
Berth No. 6	170	34

If necessary, vessels over 600 ft. in length can be accommodated in berths 4 to 6, providing the area available for docking. Oil carriers have mooring buoys outside port area in depths of 48 ft. Installations consist of two groups of buoys, located in the North part of the bay, outside the port but sheltered from the swell prevailing in the coast, by the breakwater. 3 buoys are used to moor tankers loading crude oil from Bolivia. 2 buoys are used to moor tankers discharging clean products for city service.

HEALTH: Health officer boards ship after Pilot has docked. Pratique granted after routine inspection of certificates and papers requested internationally. Yellow flag is lowered to signal the rest of the boarding party to embark to clear the ship.

In case of fever, and/or suspected diseases on board, Captains are to radio to Port Captain of the above situation. Upon arrival, vessels will be anchored in Quarantine, and inspected according to international procedures. From another Chilean port, pratique is automatic. Also see "General" before first port.

RADIO:
Use "Maritgob Arica" via coastal radio CBA 4. Listening watch kept on 8360 kc/s. Transmissions at 0800, 1000, 1200, 1400, 1600 and 1800 hrs. on 8478 kc/s. A1. Alternatively if necessary use Valparaiso CBV on 500 kc/s.

It is advisable however to request Agents at previous port to notify Arica well in advance of arrival.

Also see "General" before first port.

TUGS: Only one tug in this port and normally joins vessel at the end of the breakwater. Tug is compulsory for docking and undocking. Tug provides the line at no extra charge.

CRANES:
Berth – None.
Berth 2 – 1×7 tons.
Berth 3 – 2×3 tons.
Berth – 2×3 tons.
Berth 5 2×5 tons.
Berth 6 –

SPECIALISED CARGO HANDLING FACILITIES: Two conveyor belts and pall-loaders to operate with bulk ores, grain, coal, etc., at a rate of 100 t.p.h. per conveyor approx.

Containers are handled with conventional gear, but the port has a Container Yard, served by railroad and a bridge crane capable of lifting 65 tons. Service to containers also includes 10-ton fork-lift trucks, mobile cranes from 12 to 13 tons capacity, and specially designed wagons for their proper transportation.

STEVEDORES: Generally, stevedores are nominated the day before ship arrives, according to ETA, by the Agent. Also nomination can be made during the day. Working hours are 0800–1200, 1400–1800. Overtime: 1200–1400, 1800-2100 and 2100–2300 hrs. Also see "General" before first port.

MEDICAL: Medical assistance can be obtained at any time requiring no advance notice. Hospital in the city.

TANKERS:
Esso Buoys: Position 053°×830 m. from breakwater light. Can handle vessels up to 45,000 d.w.t., 35 ft. draft. Vessels moor to 3 stern buoys. Wires must not be used for berthing.
Bolivian Export Buoy: Position 039°×1,084 m. from breakwater light. Can handle vessels up to 60,000 d.w.t., 43 ft. draft. 12 in. hose connection. Loading rate 9,000 bbls.p.h. No deballasting facilities.

Also see "General" before first port.

Berthing is generally in the morning or early evening. Wires must not be used for berthing. Vessels moor to 3 stern buoys.

San Martin Bay Buoy: Used for discharge of Bunker C for fishing fleet. Max. draft 45 ft. No length restriction. 8 in. hose connection. Vessels moor to 3 stern buoys. A bolt is required to attach mooring lines to the ring type eyes on the buoys. No wires may be used.

DENSITY: Sea water: 1025.

FRESH WATER: Fresh water is available. Hoses to be provided by vessels. Rate of delivery about 10 t.p.h.

FUEL: No fuel facilities.

FIRE PRECAUTIONS: Red label explosives stowed in cargo hatches, require special permission to discharge within the port. Explosives for Arica are discharged into lighters, at mooring buoys located outside the port area. For tankers who load or discharge outside the port area, usual fire precautions are enforced.

DEVELOPMENTS: Project to build a new mole in the Northern part of the port, with accommodation for two ships of approximately 540 ft.

GANGWAY/DECK WATCHMEN: Port regulations call for a gangway watchman.

OPENING/CLOSING HATCHES: Riggers provided to attend to these services, nomination is by number of hatches working. 5 men to a hatch.

CERTIFICATES:
Tonnage Certificate.
Lighthouse Dues (Chilean).
Safety Radio Certificate.

CUSTOMS ALLOWANCE: One carton cigarettes per man, and one bottle wine/spirits per man.

IDENTIFICATION CARDS: Needed to leave and/or enter port area.

CONSULS: The following countries are represented at Arica:
Argentina
Belgium
Bolivia
Denmark
Ecuador
El Salvador
France
Germany
Great Britain
Italy
Netherlands
Norway
Paraguay
Peru
Spain

REPAIRS: Only small repairs can be performed in Arica, like welding, lathe, mechanical and adjusting of motors. Also possible to repair electric motors.

DRYDOCKS: There are 2: intended for fishing boats. Max. capacity 200 tons.

REPATRIATION: Crew changes can be arranged through the local office of immigration, if repatriated.
AIRPORT: Distance to airport: 7 miles. No international flights are served in Arica, except 2 flights weekly to Bolivia. Domestic flights are available at the rate of 2 per day.
TIME: GMT minus 4 hours, advanced 1 hour from September to March.
HOLIDAYS: Cargo can be arranged on all holidays except Labour Day (1st May).
POLICE/AMBULANCE/FIRE: In same order: telephone 31959; 31331; 31312.
TELEPHONES: Not available on board.
SHORE LEAVE: Permitted.
DELAYS: No delays under normal conditions. Port congestion causes ships to wait at anchorage 24 hours or more, depending on unusual facts as labour strike, swell, or lack of room to bring vessels alongside (when 5 ships are docked).
AUTHORITY: Empresa Portuaria De Chile.

BARQUITO: 26.21 S. 70.38 W.

DOCUMENTS, HEALTH: See "General" before first port.
PILOTAGE: Pilot available in Chanaral Bay.
ANCHORAGE: Open anchorage with no difficulty. The anchorage position lies on the cross bearing between Point Piedra Blanca bearing 110° and Point Brusen bearing 200°. Depth of water 82 ft. Anchoring prohibited to the South of the marker buoy.
MAX. SIZE: Up to 30,000 d.w.t.
TUGS: Not required for mooring. 2 tugs used for towing lighters only.
BERTHING: Three buoys suitable for mooring large vessels situated in depth of 9 fathoms. Buoys 4 and 5 are used for general cargo vessels.

Position: Buoy 4 Barquito Pier bearing 043°×714 m.
Buoy 5 Barquito Pier bearing 027°×390 m.

Vessels moor stern onto the buoys and discharge into lighters, which in turn discharge at the pier head. There are several barges of capacity 2.500 tons.
STEVEDORES: Order 24 hours before arrival. Working hours 0800–1200 and 1400–1800. There are 9 gangs of stevedores. Vessels arriving should ensure that hatches are closed and booms secure in order to avoid labour problems. Also see "General" before first port.
MEDICAL: Facilities available.
TANKERS: Buoys 1, 2 and 3 are for the Oil Terminal.

The hose marker buoy is in position Barquito Pier bearing 180°×268 m. Vessels use starboard anchor to pivot onto the 2 stern buoys. The hose connection will then be made on the port side. Max. draft 27 ft. Max. length 225 m.
FRESH WATER: Not available.
FUEL: Not available.
CUSTOMS ALLOWANCES: No fixed limits.
IDENTIFICATION CARDS: Required.
CONSULS: Nearest at Antofagasta.
REPAIRS: No facilities for major repairs. Two slipways for vessels up to 100 tons.
AIRPORT: At Chanaral, 2 miles away. About 2 flights a week.
TIME: GMT minus 4 hours.
TELEPHONES: Ship-to-shore communication by walkie-talkie radio.
SHORE LEAVE: Allowed.
AUTHORITY: Andes Copper Mining Co.

CALDERA: 27.03 S. 70.53 W.

PORT LIMITS: A line joining Punta Caleta with Punta Fuerte.
DOCUMENTS: See "General" before first port.
PILOTAGE: Arranged by advice of ETA. Vessels may anchor inside the port while waiting for Pilot.
ANCHORAGE: Prohibited within 800 m. of Mechanised Quay.

When working to lighters is 740 m. East of a line from the Mechanised Quay. 1 anchor is normally sufficient, but with Northerly winds 2 anchors and a kedge are recommended.
MAX. SIZE: Vessels up to 80,000 d.w.t. berth at Mechanised Quay. Max. draft 13.50 m. Berthing only at high water.
HEALTH: Pratique given after official visit, and automatic for vessels from another Chilean port. In case of contagious disease on board, advance notice is required and vessel may need to be cleared first at Valparaiso.
RADIO: Radio Costera Valparaiso – CBV 2; working during even hours only between 0800–1200 and 1400–2200 hrs.

Radio Costera Caldera – CBD 2, receiving on 2182 kc/s. only at following times: 0830–0900, 1030–1100, 1430–1500, 1630–1700 hrs.
TUGS: None available.
BERTHING:

Fiscal Mole: Length 225 m. Depth 29 ft. Vesels can berth stern onto the mole using 3 lines, and 6 or 7 shackles on the starboard anchor. Ship's head should be on 360°. It is advisable to shut all ports and doors prior to berthing due to the large clouds of dust from the Iron Ore Berth.

Iron Ore Berth: Max. length 235 m. Max. draft 42 ft. The loading arm is fixed, hence vessels must shift to position each hatch under the tower. All cranes or derricks must be swung out to starboard prior to mooring. Vessels berth port side to, using 6 mooring buoys for head and stern ropes, and 2 dolphins for springs. Loading rate 1,500/2,000 t.p.h. Berthing allowed only by day, but night sailing permitted.
TANKERS: Tankers moor to 2 stern buoys, using both anchors. No length restriction. Water depth 33 ft. Hose connection 12 in. Daylight berthing only.
STEVEDORES: In ETA to Agent indicate number of gangs required for loading/discharging. Also see "General" before first port.
MEDICAL: First-aid only at Caldera. If needed advance notice necessary to prepare transport to Copiapo, nearest city 75 km. away. Fumigation only carried out at ports of Arica, Valparaiso, or Punta Areas.
DENSITY: 1026.
FRESH WATER: Not available.
FUEL: Not available.
GANGWAY/DECK WATCHMEN: Arranged by Agent.
OPENING/CLOSING HATCHES: Done by riggers.
CUSTOMS ALLOWANCES: Only amount needed while vessel in port.
CONSULS: None at Caldera.
REPATRIATION: Can be arranged provided that a police agent accompanies Crew member to Santiago airport.
AIRPORT: At Copiapo, 75 km. away, a daily flight to Santiago where international connections available.
TIME: GMT minus 4 hours, no changes.
HOLIDAYS: See "General" before first port.
TELEPHONES: No connection to vessels.
SHORE LEAVE: Allowed.
AUTHORITY: Captain of the Port.

CALDERILLA: 27.05 S. 70.52 W.

Installation of Mitsubishi Ore Transport Co. Can accept vessels up to 60,000 d.w.t. at mechanised quay.

Vessels bound for Calderilla must first call at Caldera for Pilot and official clearance.
DOCUMENTS: See "General" before first port.
ANCHORAGE: Vessels less than 180 m. in length can await a berth 4 cables N.N.E. of the East Peninsula, in 42 to 54 ft. of well sheltered water. Larger vessels must anchor in Caldera Bay.
MAX. SIZE: Max. length, 240 m. Draft 40 ft. 60,000 d.w.t.
BERTHING: A mechanical loading belt has been built to the N.E. of the Peninsula. There are 2 loading arms each 50 m. long that can load at 1,000 t.p.h. The arms are fixed and vessels must shift to place each hatch under the tower. Vessels moor to 7 buoys, 3 forward and 4 aft. Entry can be made by day only.
MEDICAL: Nearest doctor and hospital 30 miles away. Ambulance available.
FRESH WATER: Not available.
FUEL: Not available.
REPAIRS: Only of a minor nature.

CHANARAL: 26.21 S. 70.38 W.

DOCUMENTS: See "General" before first port.
PILOTAGE: Compulsory for foreign vessels and tankers and for mooring at mechanised quay. There is one Pilot at the port. Pilot must be waited for in position bearing 289° and 2,025 m. from reference point indicated on Chilean navigation chart.
ANCHORAGE: Between Point Piedra Blanca and Point Piedra Negra at 325°, 2 cables from head of the Fiscal quay in 15-12 m. of water, with good holding ground of sand.
MAX. SIZE: Draft 42 ft., length 800 ft., breadth 100 ft.
RADIO:

Station call sign	*Category*	*Frequency*	*Type*	*Receives*		*Transmits*	*Schedule*
Chanaral	(T)	2 Mc/s.	A 3	2182	2182	2000	H30-45
CBH-2		4 Mc/s.	A 3	4091.6	4396.6	4396.6	H45-60

TUGS: There are 4 small tugs.
BERTHING: Fiscal Quay: About 3 cables S.W. from Point Piedra Negra, 70 m. long by 8 m. wide, depth is 5.5 m. Vessels should lie about 5 cables off the head of the pier and moor to the stern buoy in 40 ft. of water.

Mechanised Quay: At Point Piedra Blanca there is a mechanised pier, property of Compania Minera Santa Fe for loading bulk iron ores. 60 m. long by 10 m. wide, with 14.5 m. depth; sand and mud bottom. Ores transported by means of a conveyor belt to a loading tower from which it is loaded direct to ship's hatches. At present loading tower is fixed so that vessels have to be moved to change hatches, but studies are being made as to possibility of converting it into a mobile tower. Loading rate is of 1,000 t.p.h. Vessels up to 224 m. length, 36 ft. draft have loaded alongside up to 34,000 long tons. Vessels moor at head of quay, which has 4 buoys (2 forward and aft.). In addition the quay is provided with bitts to secure mooring ropes, fore and aft.
STEVEDORES: 85 stevedores (9 gangs of 9 men each). Ordinary working hours are from 0700 hrs. to 1100 hrs., and continuing from 1300 hrs. to 1700 hrs., but by special agreement and paying for meals, work can be carried on straight, i.e. from 0700 hrs. to 2000 hrs. and continuing from 2000 hrs. till 0700 hrs. of the following day with a 100% surcharge on wages, etc. Also see "General" before first port.
MEDICAL: Modern hospital and doctors available.
FRESH WATER: No means for supplying vessels.
FUEL: Not available.
GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: Done by stevedores.

IDENTIFICATION CARDS: Required.
CONSULS: None at Chanaral, the nearest are at Antofagasta.
REPAIRS: 2 shipyards to repair tugs and lighters only.
REPATRIATION: Facilities exist.
AIRPORT: The airport is located 2 km. North of Chanaral.
TIME: Local time is GMT minus 4 hours.
SHORE LEAVE: Allowed.
DELAYS: There is frequent surf during June and August, sometimes interrupting traffic and cargo operations in the bay for a short time. Surfs generally come from the N.W. or the West. Fogs are frequent between April and August, but sometimes they are quite heavy during other months of year.
AUTHORITY: Empresa Portuaria de Chile.

CONSTITUCION: 35.19 S. 72.29 W.

DEVELOPMENTS: A new port under construction at Maguellin, about 6 km. South of Constitucion.

Facilities to include a main jetty, 244 m. long, with 2 berths for vessels up to 32,000 gross tons.

Two smaller jetties and a mole for fishing vessels are also envisaged.

Depth of water is estimated to be 16 m. The facilities will be used for export of paper and cellulose.

Although the pier has been built, no vessels have berthed here yet due to the dangers of the Southerly wind. It appears likely that this port will never be used.

COQUIMBO: 29.57 S. 71.21 W.

DOCUMENTS: See "General" before first port.
PILOTAGE: Compulsory for vessels mooring to quay. Pilot boards in position bearing 101° and 1,215 m. from Point Tortuga Lighthouse, between Lat. 29° 55′ 38.5″ S. Long. 71° 19′ 56″ and Lat. 29° 56′ 10″ S. Long. 71° 20′ 34″ W.
ANCHORAGE: Vessels lie in roads until ready to tie up to quay. Bay has good anchorage with a sandy bottom and depths varying from 15-10 m. A forbidden zone is indicated on charts.

Vessels frequently have to anchor first before mooring to the quay as this only has capacity for 2 vessels at a time.
MAX. SIZE: 375 m. long and 30 ft. draft.
RADIO:

Station call sign	*Category*	*Frequency*	*Type*	*Receives*	*Transmits*	*Schedule*
Coquimbo CBC-2	(S)	4 Mc/s.	A 3	4091.6 6265.5	4396.6	H00-30
		6 Mc/s.	A 1	6280	6505.5	H30-60

TUGS: No tugs available, only motor launches to assist the Pilot and for passing mooring lines.
BERTHING: Buoys: Santa Fe Mining Company has 2 private buoys at berth 2 for mooring ore vessels using the portable and semi-mechanised system of loading.

Mooring Mole: 375 m. long, for 2 vessels of 180 m. each with draft of 30 ft. Berth number 1 is on the South side and number 2 on the North. Can be used at all times except during stormy weather, or when heavy swell is experienced.

Passenger Mole: to the South of mooring mole.

Rail Mole: is an extension of berth number 2 and serves for mooring small vessels.

North of berth number 1, Santa Fe Mining Company has installations for storing ore in bulk, consisting of 2 subterranean ore yards. The loading system includes some incline conveyors, some field conveyors, a stacker conveyor, a loading conveyor and a 77.5 ft. loading tower featuring a 56 ft. aluminium boom. All these components are movable on rubber tyres.

Ore through a system of belt conveyors is passed to these portable conveyors made up in sections and then to loading tower with a loading boom from which ore is loaded direct to ship's hatches. Usually, vessels are shifted when changing hatches. Rate of work is 600 t.p.h. and vessels moor with the bow to the North, port side alongside.

Discharge of Explosives and Ballast – Explosives are discharged direct to quay prior to authorisation by Maritime Authorities and due precautions being taken.
STEVEDORES: Ordinary rate of loading per gang, hatch, hour: Sacked goods up to 80 kilos each 25 tons; Cases, boxes, etc., 18 tons; Sacked ores 40 tons; Copper concentrates 60-80 tons; Manganese ore in bulk 80-100 tons; Iron ore 100-1000 tons.

Unloading: Wheat in Bulk 60 tons; Coal 50 tons; Timber 30 tons; Rails 33 tons.

Working hours are 0800-1200, 1400–1800 hrs. Also see "General" before first port.
MEDICAL: Hospital at Coquimbo and La Serena.
FRESH WATER: Can be obtained in limited quantity at quay at rate of 25 t.p.h. Quality is good.
FUEL: Coal can be obtained in limited quantity. Diesel oil and gasoline can be obtained at the quay from truck or railcar.
GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: Done by stevedores.
IDENTIFICATION CARDS: Required.
CONSULS:

British
Italian
Liberian
Panamanian
Peruvian
Spanish
Danish Vice-Consulate
Swedish Vice-Consulate

REPAIRS: No shipyards. There is a private workshop for minor repairs.
REPATRIATION: Facilities exist.
AIRPORT: 7 km. to the East of La Serena.
TIME: Local time GMT minus 4 hours.
SHORE LEAVE: Allowed.
AUTHORITY: Empresa Portuaria de Chile.

CORONEL: 37.02 S. 73.10 W.

PILOTAGE: Is compulsory. Pilot boards 400 m. N.W. of the coal pier.
BERTHING: Both anchors are used to the final shackle, Ship's head bearing 180°. There are 5 mooring buoys, and the vessel berths starboard side alongside. Loading rate 400 t.p.h. Vessels will be required to shift so that each hatch is under the loading arm.

Max. size 170 m. Draft 24 ft. However, it should be noted that there is only 18 ft. of water near the stern buoy. The berth is exposed to Northwesterly winds and vessels should be ready to sail at short notice.
FRESH WATER: Available.
FUEL: Not available.
MEDICAL: Doctors and Hospital available.
CONSULS: At Concepcion.

CRUZ GRANDE: 29.27 S. 71.20 W.

(No longer in use as a commercial port.)

All installations and structures are being dismantled.

EASTER ISLAND: 27.08 S. 109.22 W.

PILOTAGE: Not available, although assistance can be given by the local natives.
ANCHORAGE: The best anchorage is at Hanga Roe from October to April. Vessels should anchor outside the 16 fathom line. Anchorages in general are poor, and vessels should be prepared to sail at any time with the onset of bad weather.
BERTHING: Vinapu Roads. Length 150 m. Max. draft 28 ft. Two 6 in. flexible hoses. manifolds must be no more than 65 m. from the stern.
MEDICAL: Doctors and hospital available.

GUAYACAN: 29.58 S. 71.22 W. (See Plan Book)

DOCUMENTS: see "General" before first port.
APPROACHES: Seaward approach should be made to clear all navigational dangers. From the sea, the entrance ranges in line bearing 136.5° will lay the vessel directly to and between Point Miedo and Point Herradura, two headlands to the North and South of the bay entrance, which is 800 yards wide. The bay broadens inside to 1 mile and extends 1.25 miles in a S.E. direction.

The depth of the entrance varies between 23 to 36 fathoms, decreasing gradually to the shore. Islita, a small islet, lies a short distance off Miedo Point.

The approach to Herradura Bay is a fishing zone and caution must be maintained in navigation. Trawlers and hand-propelled craft are used.

Two diamond-shaped range marker boards, painted with diagonal stripes, are mounted on poles on the beach. With these in line, bearing should be 136.5° when coming through the entrance. Lights, foreground red with green behind, are fixed to the markers for night approach. In clear weather they are visible at approx. 5 miles.

Currents from the South and S.W. tend to lay the vessel to the N.N.E. when entering the bay. There is a light at the entrance to Herradura Bay on Herradura Point.
PILOTAGE: Ships calling at Guayacan should arrive with their accommodation ladder and Jacob's ladder ready to be lowered for the Pilot. Pilotage is compulsory. Ship's engines shall be stopped when the pilot launch approaches the vessel. The pilot's launch under no circumstances will go outside the limits of the port. It is imperative that the ETA of the vessel be as exact as possible so that the Pilot and officials are on hand and may board the vessel before anchoring. The Pilot and officials must be collected and brought to Guayacan by car.
ANCHORAGE: Good holding ground for anchoring in the bay with sheltered conditions. Entering on the ranges a cross bearing may be obtained with a set of docking diamond markers and lights, bearing 094° similar to approach markers and the anchor dropped. This position assures clear swing for all vessels in about 15 fathoms and assures free navigation for any vessel which may be at the pier.
RADIO: Operators' cable address is Cap, La Serena, Chile, and all messages having their origin in North America should be routed via All America Cables, and in the rest of the world, via Cable and Wireless Limited. Ship's radio messages should be routed via I.T.T. hours out by radio.

Vessels should advise ETA 7 days, 96 hours, 48 hours and 24 hours out by radio. Also see "General" before first port.

BERTH DESCRIPTION: The ore pier, of steel construction with a concrete deck, is 700 ft. long and located at the N.E. part of the bay. A total of 10 mooring bitts are available on the main pier, with 2 each on mooring dolphins to the South and North of the pier. Two twin mooring buoys, 1 North and 1 South, a distance of 350 ft. and 410 ft. from each dolphin and slightly inshore of the pier, are also available. A twin buoy to assist in docking and undocking is located 460 ft. to the West of the North end of the pier. Depth of water at the pier is 55 ft. at mean low water.

MOORING: Vessels dock port side to the pier. On approaching the pier, the starboard anchor is dropped at a position indicated by cross bearing on markers located on the shore to the N.E. and at the South end of the pier and the shore. Lights are located on the markers for night docking. Nine shackles of cable are laid.

A motor launch assists in rope handling to the pier and buoys. Sufficient deck crew must be available at all times to shift the vessel if required and to adjust moorings during loading.

Engines must be available at short notice. Permission for any major repair to the engines at the dock must be obtained from Maritime Authorities.

LOADING: In the case of combination ore carrier/tanker type of vessel, the Master must present a gas-free certificate before notice of readiness will be accepted. Such certificate may be obtained from a Coquimbo firm and request for same should be included in the 96 hours ETA message, reporting if there is or there is no tank gas detecting instrument on board.

The loading boom extends 51 ft. from the face of the pier and can be retracted 22 ft. It may be raised or lowered 18° from the horizontal when loading.

The tower is mobile with a run of 390 ft. Vessels may have to be shifted. Aft hatches should be loaded first when possible to facilitate efficient loading. When not loading the rig is parked at the centre of the pier with the boom in a vertical position inside the pier face. In the horizontal loading position the boom is 40 ft. from the water at low-water level and vessels should be ballasted to ensure hatch coamings and other fixed structure at the hatches have a height less than 40 ft. above water at low-water level. Booms and other tackle should be cleared from all hatches.

Rated loading capacity is 3,000 t.p.h.

Emergency stops only are permitted on the conveyor system. Vessels on which cargo reaches coamings should note that 390 tons are on the belts between the stockpiles and the ship and this must be cleared before stopping the system.

Cargo is belt trimmed only. Hire of trimmers, if required, is for vessel's account.

On completion of loading, the vessel shall leave the pier. Delays of port operations including delays of other vessels awaiting berth, caused by a vessel which for any reason is not prepared and able to move from the pier when so ordered, are chargeable to the vessel which causes such delays, at the rate of $4,000 per day or at the demurrage rate of any other vessel that may be delayed – which ever is higher.

BALLAST: Vessels should be ballasted to meet the loading tower information given and to ensure safe handling. Wind condition can make docking of light vessels difficult. Ballast may be discharged at the pier while loading. Upper wing tanks emptied by gravity should have covers fitted over discharges. Vessels are liable to fines by Maritime Authority for any oil or other contaminate discharged in the bay either from tanks or from pumping bilges.

TANKERS: Vessels moor to 2 stern buoys with ship's head bearing 225°. The hose is brought up on the starboard side.

MEDICAL: Medical attention may be arranged through the vessel Agent. No person will be attended unless he is provided with a letter from the Master authorising such treatment.

FRESH WATER/FUEL: Fresh water and fuel are not available at this port, although water and diesel fuel may be obtained in nearby Coquimbo, or at Salinas, near Valparaiso. Bunker "C" Type fuel can be had at Salinas also.

REPAIRS: Only in cases of extreme emergency can limited ship repairs be effected at this port.

CONSULS: In Coquimbo, or the adjacent city of La Serena, there are consuls or Consular Agents for Peru, Liberia, Great Britain, Denmark, Italy and Sweden.

HOLIDAYS: If advance ETA is received, ships will generally be received every day with the following exceptions: 1st January; Good Friday; 1st May; 18th September; 25th December. Also see "General" before first port.

SHORE LEAVE: Shore leave may be granted at the Master's discretion. There are no restrictions by local authorities, but men should be certain to carry their identification cards.

SERVICES: Mail for vessel and crew should be addressed care of ship's agent at Coquimbo, all mail that is received for holding by the Agent will be delivered to the vessel upon arrival.

Do not have parcel post packages sent, as they must go through customs in Santiago and are delayed from 2 weeks to a month for their despatch.

Spare or repair parts for the vessel should be sent via air express, addressed to the ship, care of ship's agent at Coquimbo, Chile and marked "Ship's Stores in transit", so as to avoid paying customs duties. Information regarding the shipment should be sent to the Company via air mail correspondence.

A limited supply of provisions is available, but requests should be sent by radio 48 hours prior to arrival.

AUTHORITY: Compania de Acero del Pacifico, S.A.

HUASCO: 28.27 S. 71.14 W. (See Plan Book)

DOCUMENTS:

1 Clearance.
12 Cargo Manifests, or 2 No Cargo Manifests.
6 Passenger Lists, or 1 No Passenger Lists.
7 Crew Lists.
4 Stores Lists.
3 Crew Personal Effects.
2 Stowage Plans.
2 Per Passenger Baggage Declarations.
1 Health Certificate.

PILOTAGE: Compulsory, for vessels mooring to Santa Barbara Guacolda I and Guacolda II mechanised quays. Vessels waiting for Pilot and/or clearance must anchor in position bearing 050° and 1,800 m. from Guacolda lighthouse, in the centre of the bay, between Guacolda peninsula and Panulcillo islet.

ANCHORAGE: Vessels anchor in roadstead, larger vessels finding good anchorage ground 2 cables N.N.E. of Cayo Isle in 26-24 m. of water and small vessels 2 cables bearing 090° from Cayo Isle in 12 m. of water, sandy bottom.

Depth is generally moderate and level with a sand and shell bottom, while at the maritime terminals of Santa Barbara and Guacolda is quite deep, around 50 m., which has to be taken into account when anchoring. The bottom at these terminals is mud, offering a good holding ground. Pilot to be compulsory for anchoring in the Bay.

MAX. SIZE: See "Berthing".

RADIO:

Station call sign	*Category*	*Frequency*	*Type*	*Receives*	*Transmits*	*Schedule*
Huasco CBH-3	(T)	2 Mc/s.	A 3	2182	2182	H30-60

VHF: Vessels must call Pilot Station 2 hours before arrival.

TUGS: No tugs available. At Huasco there are 4 motor launches for use of Pilot.

BERTHING: There are 3 cargo terminals in service Guacolda I, Guacolda II and Santa Barbara, property of Compania de Acero del Pacifico. The particulars of these installations are:

	Santa Barbara (m.)	*Guacolda I (m.)*	*Guacolda II (m.)*
Max. Length	265	265	300
Max. draft	15	13.50	22
Max. coaming Height	13	12.80	18
Max. breadth	40	40	48
Cargo rate (L/T hours) Max.	2,400	2,200	5,000
Run of the loader on ship deck	50	100	110
Largest ship attended (d.w.t.)	120,000 up to 15 m. draft	120,000	120,000 full cargo up to 13 m. draft

Santa Barbara Terminal: Used exclusively for loading iron ore. No dock to berth only 1 loading tower protected by dolphins (Duque de Alba). Ships berth without tugs to 7 buoys using the starboard anchor. Vessel has to be shifted to receive cargo in all the hatches. Transit through the installations is not allowed, and taxi boat service is provided to go ashore to Huasco wharf.

Guacolda I Terminal: Normally used to load iron ore. Length 183 m. However it is intended in future to use the berth to discharge oil or coal for internal company use. The loader has a 100 m. run. If it is neccessary to shift the vessel, this must be done by crew members, as shore gangs are not available.

Guacolda II Terminal: Only Iron Ore pellets loaded – at the present time ship's crew required to shift vessel.

STEVEDORES: There are 50 stevedores for up to 4 gangs. In addition there are 20 longshoremen and 14 lightermen. Working hours are 0700-1200, 1400-2100.

MEDICAL: Hospital at Huasco, also 2 doctors and dentists.

FRESH WATER: Not available.

FUEL: None available.

OPENING/CLOSING HATCHES: Done by stevedores in general cargo ships.

IDENTIFICATION CARDS: Not required.

CONSULS: Norway – Honorary Vice-Consul.

REPAIRS: Only for the repair of minor craft.

AIRPORT: Nearest commercial airport is at Vallenar, 52 km. away.

TIME: GMT minus 4 hours in Winter (15 Mar. to 15 Oct.) and GMT minus 3 hours from (15 Oct. to 15 Mar.).

TELEPHONES: Local and outward service.

GENERAL: Zone for ballast: it is prohibited to deballast in port except clean water from deep tanks. For any other kind of ballast authorisation should be requested first to the maritime authority who will indicate the appropriate place.

SHORE LEAVE: Allowed.

AUTHORITY: Capitan de Puerto de Huasco.

IQUIQUE: (including Patillos Cove) 20.13 S. 70.10 W. (See Plan Book)

PORT LIMITS: The interior area included between a line joining the Serrano Island and Mole lights and another line running 290° (True) to the North buoy of the Esso tanker anchorage.

DOCUMENTS:

For vessels coming from foreign countries:

Clearance from last foreign port.
Crew list.
Passenger list.
Manifest of hazardous cargo (when applicable).
Insurance policy against contamination (for tankers).
International Maritime Health Declaration.
Deratting certificate.
International smallpox certificate.
Tonnage certificate.
Radio-telegraphy safety certificate.
Certificate of equipment.
Lighthouses and buoys certificate.
Freeboard certificate.
Construction Certificate.

For vessels coming from another Chilean port.

Clearance from last port.
Crew list.
List of passengers.
Manifest of hazardous cargo (when applicable).

PILOTAGE: Compulsory. During the day the pilot cutter displays the "H" flag of the international code, and at night the lights prescribed by the International Regulations. Pilot boards 3 cables beyond the head of the breakwater. Berthing hours are from 0600 onwards, and for sailing there is no restriction, but preferably before midnight. Telegraphic address for the Pilots is "Maritgob Iquique 7", it being necessary to give prior notice of requirement 72, 48, 24 and 12 hours ahead of arrival.

Channel for calling the Pilot is VHF Channel 16 and working is on Channel 12. The launch used by the Pilots is white, and approx. 27 ft. overall length, the Pilot coming out beyond the port limits to board the vessel.

ANCHORAGES: Access to the bay is rendered difficult by the continuous traffic of fishing vessels, which limits the manouevring area and makes vigilance very necessary. The bay contains a spacious and suitable anchorage with varying depths from 40 to 14 m. with sandy bottom, the depth descending gradually from the entrance towards the East. Vessels which are going to stay for a short period of time and which are not going alongside the moles, are safe with a single anchor and necessary chain, according to the point where they moor.

Vessels which moor at the tanker buoys, either Copec or Esso, must remain with bow heading 270° and anchored with 2 anchors. This is convenient so as to remain with the bow pointing out to sea and not to cause the hoses to work. There are 2 submarine cable zones where only vessels of the Chilean Navy may moor. This is defined by a line joining the head of the Naval Quay (ex Alimar North) to the light of the extreme breakwater (291°) and the demarcation 000° determined by a radius of 460 m. from the centre of the quay head.

RESTRICTIONS: Mist occurs with greater frequency from December to March, and is generally slight and low which produces a danger when making a landfall. The general direction of the current is from South to North at a rate of 0.5 to 3 knots. This current is strong at Punta Gruesa, Cavancha and Punta Piedras. Fierce winds frequently occur from May to September but their action is very much less within the area protected by the breakwater.

MAX. SIZE: The berthing areas with their specifications are as follows:

Berths 1, 2, and 3 with a total length of 526 m. and an average depth of 9 m. the West side quay comprises Berths 4 and 5 with a length of 335 m. and depth between 9 and 12 m.

The East side quay comprises Berths 6 and 7 with a length of 280 m. with a depth of 9 to 12 m. at Berth 7, and 12 – 15 m. at Berth 6. The vessels at Berths 5 and 6 must be moved away to allow other vessels to berth at Berths 4 and 7.

Max. draft at berths – 30 ft. Max. draft at tanker mooring – 32 ft.

FREE PRATIQUE: On arrival in port vessel will be received by the Health Authority, and if everything is in order, by the Maritime Authority and Customs. It will then be granted "free pratique". In the event of illness or fever on board, contact must be made with the local Agent who will inform the medical authorities.

RADIO: The best way for the vessel to pass ETA messages, both to Agents and to the Maritime Authority, is to "Maritgob Iquique" via Antofagasta Naval Radio: CBA-3.

VHF: In the Iquique Maritime Control there is VHF equipment to facilitate communications between vessel and Pilot, the procedure used being: to call up on Channel 16 and to work on Channel 12. The Pilot and tug use walkie talkies which have Channel 16.

TUGS: There is 1 tug with sufficient horse power to moor and unmoor vessels.

BERTHING: Inside the breakwater are Berths 1, 2 and 3, Berths 2 and 3 being permanently occupied by deep sea fishing vessels. On the mooring pier on the West side are Berths 4 and 5, and on the East side, Berths 6 and 7. When there is a swell, it is not recommended to berth at Berths 4 and 5 as mooring ropes may be parted. Maximum drafts for mooring are 30 ft., less at Berth 7. Loading and discharging is by cranes and/or ship's derricks.

Length of berths

Berth No. 1 – 150 m.
Berths 4 and 5 – total length 300 m.
Berths 6 and 7 – total length 270 m.

Patillos Cove: The port is used for the bulk shipment of salt. It is situated 33 miles South of Iquique. Pilot boards by tug from Iquique. Vessels berth to 6 buoys, but must move to present each hatch to the port loader. Max. size: length 225 m., draft 40 ft.

CRANES: At Berths 4 and 5 there are 3×2.5 ton cranes for loading and discharging. At Berths 6 and 7 there are 4 cranes up to 3 tons for loading and discharging.

MEDICAL: In the event of any serious case or an emergency it is necessary to advise the Agent by telex, otherwise advice should be by Channel 16 VHF. In the district is a modern hospital with sufficient medical resources, and Crew members can be treated. Crew members must be vaccinated against smallpox and cholera.

STEVEDORES: Gangs of stevedores, for ship and shore, must be requested prior to 1600 hrs., which means, in effect, the day prior to that when they are needed. They work from 0800 to 1200 hrs and from 1400 to 1800 hrs. Work will be extended to 2100 hrs. on request from the Agent and up to 2300 hrs. when the vessel has to sail.

TANKERS: The loading and discharging line is of metal and of 12 in. diameter, reducing at its connecting point to 8 in. There are no deballasting tanks in the port nor any for accepting oil residues. In front of El Colorado beach, there are 2 groups of buoys with 3 buoys in each, intended for mooring tankers. The North group is for refined products, and the South group for crude oil. Maximum permitted draft is 32 ft.

FRESH WATER: This is brought from the mountain range by pipes for consuption by the town. It can be delivered to vessels moored at the pier in small quantities, and is of good quality.

FUEL: Diesel or boiler oil can be supplied to vessels on request, in any quantity, and for this purpose they must moor at the tanker buoys in front of El Colorado beach. If quantity required is less than 300 tons, it may be taken at the pier by means of tanker trucks.

CONSULS:

Bolivia
Colombia
Denmark
Italy
Peru
Spain
Sweden
Yugoslavia

REPAIRS: Normal repairs can be effected at the Marco Shipyard and spare parts can be made at the State Railways workshop, at the Industrial Workshop for Training, and at the Port Administration.

SURVEYORS: Lloyds.

GANGWAY/DECK WATCHMEN: It is necessary and compulsory for all vessels to have a security guard at the gangway, a second guard is required when hazardous cargo is carried.

OPENING/CLOSING HATCHES: Vessels must enter with their holds closed, and these will be opened by a special gang of seamen in the port who, furthermore, attend to all movements of derricks, cranes, and equipment, etc.

DRY DOCKS: There are 2 dry docks for vessels up to 500 tons, and a floating dock for vessels of 300 tons.

CUSTOMS ALLOWANCES: It is permitted to have all that is required for normal consumption from the ship's store.

REPATRIATION: There are no problems in repatriating crew, either for exchange purposes or for holidays, who have to travel back to their country of origin.

AIRPORT: The airport of Cavancha is 5 minutes away by car, and there are connections by the National Airline and Ladeco (Linea Aerea del Cobre) with foreign airlines at the Capital's Airport in Santiago de Chile.

TIME: GMT plus 4 hours.

HOLIDAYS: 1st January (New Year's Day); 21st May (Navy Day); 15th August (Assumption); 18th September (Independence); 19th September (Army Day); 12th October (Race Day) (Discovery of America); 1st November (All Saints); 8th December (Immaculate Conception); 25th December (Christmas).

There is also Holy Week which is a movable holiday between end March and middle of April.

POLICE/AMBULANCE/FIRE: Police, Tel. 23456; Ambulance Tel. 22370; Fire Brigade, Tel. 21212.

TELEPHONES: There is no facility for connection on board. Telephones on the quay less than 100 m. from the vessel.

SERVICES: It is possible to obtain gangs for tank and hold cleaning.

SHORE LEAVE: Permitted, no restrictions.

IDENTITY CARDS: Any Crew member coming ashore is given an identity card by the International Police, card is returned when the vessel sails.

AUTHORITY: Maritime Governor of Iquique.

LOTA: 37.06 S. 73.10 W.

DOCUMENTS: See "General" before first port.

ANCHORAGE: Northwest of the Lutrin Light. The Pilot will board here.

BERTHING: Vessels moor to 4 buoys, using both anchors, and lie with their bows on 190°T. The pier is 220 m. long, depth varying from 29 ft. at the head to 23 ft. at the 149 m. mark. Vessels are advised to use their own fenders.

Max. length 110 m. Draft 28 ft. 6 ins.

FRESH WATER: Available.

FUEL: Not available.

CONSULS: At Talcuhuano.

MEJILLONES: 23.06 S. 70.28 W.

DOCUMENTS:

Vessels directly from foreign ports:
3 Crew Lists.
3 Passenger Lists.
3 Stores Lists.
5 Import Cargo Manifests.
11 Manifests for cargo destined for Bolivia.

Vessels coming from another Chilean port.
1 Crew List.
1 List of Passengers.
1 Stores List.
5 Import Cargo Manifests.
13 Manifests for cargo destined for Bolivia.

PILOTAGE: Service carried out by the Pilot Corps of Antofagasta (65 km. from this port). Service is compulsory. Agent has to apply for the Pilot, and it is important to give arrival notice in good time.

ANCHORAGES: Open bay very well protected and with deep water.

MAX. SIZE: No restrictions. Vessels work cargo at anchor.

HEALTH: Pratique is automatic for vessels coming from another Chilean port, otherwise it will be granted after Sanitary visit.

RADIO: Antofagasta radio station CBA-3. Listens out between 0800 and 1200 hrs. and between 1400 and 1800 hrs.

Transmits 8,370 receives 8,354 Telegraphy H 00–30.
Transmits 4,396 receives 4,091 Speech H 30–45.
Transmits 8,780 receives 8,230 Speech H 45–60.

The station is active listening out every 2 hours, i.e. 0800, 1000, 1200, 1400, 1600 and 1800 hrs.

TUGS: There are none.

BERTHING: There are no berths. Vessels work cargo at anchor.

STEVEDORES: Agent to be informed before 1800 hrs. the day before arrival to order gangs.

MEDICAL: There is a doctor in the port but no hospitals are available and patients are transported to Antofagasta.

DENSITY: Sea water.

FRESH WATER: No fresh water available.

FUEL: Not available.

GANGWAY/DECKWATCHMEN: This service is recommended.

OPENING/CLOSING HATCHES: This work can be carried out by crew and/or stevedores. Derricks operated only by crew.

SHIP'S CERTIFICATES:
Register Certificate.
Tonnage Certificate.
Radio Certificate.
Safety Equipment Certificate.

CUSTOMS ALLOWANCES: 200 cigarettes for each member of the crew besides the ones in the stores. One bottle wine/spirits per person.

REPAIRS: There are no workshops. Vessel repairs done by the crew are allowed.

IDENTIFICATION CARDS: Not necessary, only passport and boarding card.

REPATRIATION: There are facilities for changing the crew.

AIRPORT: 25 km. from Mejillones is the airport Cerro Moreno. To travel to U.S.A. one must go via Santiago. There are daily flights from Antofagasta to Santiago, and from Santiago to U.S.A. with stops in various countries.

TIME: There are two official times:

Summertime: from the second Sunday in October to the second Saturday in March. Local time is GMT minus 3 hours.

Wintertime: from the second Saturday in March to the second Saturday in October. Local time is GMT minus 4 hours.

HOLIDAYS: It is possible to work on these days with a surcharge of 100%.

New Year's Day; Good Thursday; Good Friday; 1st May; 21st May; Ascension Day; 18th September; 19th September; 12th October; 1st November; 8th December; 25th December.

POLICE/AMBULANCE/FIRE: Police Tel. 7 Mejillones; Ambulance 24142 Antofagasta; Fire 41 Mejillones.

TELEPHONES: It is not possible to install lines on board.

SHORE LEAVE: Members of the crew are allowed ashore.

AUTHORITY: Captain of the Port.

PUERTO MONTT: 41.28 S. 72.57 W. (See Plan Book)

PORT LIMITS: Between the meridians of 72° 55′ 50″ W. and 72° 59′ 00″ W. The Southern limit is the parallel of 41° 29′ 48″ S. in Reloncaui Bay.

DOCUMENTS: See "General" before first port.

PILOTAGE: Ordered by Agent on receipt of vessel's ETA at least 24 hours in advance. Otherwise request directly to Port Captain, cable address "Maritgob Montt". Vessels should anchor as indicated below and exhibit code flag "G". Pilot boards from a motor boat at the anchorage.

ANCHORAGE: Vessels of any size can anchor in the outer roads of the port. Recommended position 800 m. off Isla Tenglo buoy bearing 254°. In Winter bad weather, it is recommended to have a second anchor ready.

RESTRICTIONS: Normally there is no entry into port at night. Vessels over 5,000 tons displacement are restricted by the tide for entering.

MAX. SIZE: Max. length 172 m. Max. draft 26 ft. 6 in. In these conditions, manoeuvring is effected with the tide and favourable weather.

HEALTH: All ships are boarded by authorities on arrival unless coming from another Chilean port. In case of suspected disease on board vessel must advise authorities by radio, before arrival.

RADIO: Radiocostera Puerto Montt, operating between 0800 and 1845 hrs.

VHF: Marine Control operates VHF equipment between 0700 hrs. and 2400 hrs. on Channel 16.

TUGS: There is a small 380 h.p. tug owned by Direccion y Obras Portuarias (Port Control and Works). When required, assistance is sought from the Chilean Naval vessel "Cabo Odger", provided it is available.

BERTHING: Effected in daylight hours only. Tankers moor at buoys in the Eastern part of the bay. The port was largely destroyed in the 1960 earthquake and as a result berthing at the new pier presents difficulties due to the remains of the old one, reducing the turning circle.

The new pier is at present 320 m. long, with plans to extend this to 500 m.

CRANES: There are 8 Portal cranes, 6 of 3 tons capacity and 2 of 5 tons. There is also a 20 ton mobile crane normally used for shore work.

STEVEDORES: Vessel should advise Agent before arrival the number of gangs required and amount of cargo for discharge.

Working hours are generally 0800–1200 hrs. and 1400–1800 hrs. Also see "General" before first port.

MEDICAL: All medical facilities available. Advance notice preferred if possible. Possible to obtain vaccination and inoculation certificates.

TANKERS: Tanker buoy mooring. Vessel moors using both anchors forward and 2 buoys aft. 10 in. submarine pipe-line, 2 8 in. hoses connected. No slop facilities.

FRESH WATER: Available from the quays, at rate 10 t.p.h.

FUEL: Available by barge. Larger quantities obtainable at the tanker moorings, rate 100 t.p.h. Advance notice required. See "General" before first port.

DEVELOPMENTS: Outer berths are being dredged to a depth of 8.50 m.

OPENING/CLOSING HATCHES: It is obligatory to employ shore labour for this purpose.

CUSTOMS ALLOWANCES: Two cartons of cigarettes and 2 bottles of liquor for each man, which are to be declared in his personal effects.

CONSULS: Argentina, Germany, Spain, and Netherlands are represented locally.

REPAIRS: Minor engine and electronic repairs can be effected.

REPATRIATION: Can be arranged.

AIRPORT: Situated 17 km. from the port. Daily flights (1 hr. 15 mins.) to Santiago where international connections can be made.

TIME: GMT minus 4 hours. In Summertime: GMT minus 3 hours.

HOLIDAYS: Work may be arranged on most holidays. Also see "General" before first port.

POLICE/FIRE/AMBULANCE: Police: Tel. 2240; Fire 2222; Ambulance 3991.

TRANSPORTATION: There are de luxe bus services, with daily departures, between Puerto Montt, Santiago, Valparaiso, and intermediate points.

SHORE LEAVE: Allowed.

AUTHORITY: Direccion Gobernacion Maritima de Puerto Montt.

PUNTA ARENAS: (Including Lenadura, Cabo Negro, Clarence Cove, Port Percy, Gregorio) 53.10 S. 70.54 W.

DOCUMENTS: See "General" before first port.

PILOTAGE: Compulsory for foreign vessels. Vessel entering from Pacific will usually embark Pilots in Valparaiso or any other nearest port. Vessels coming from the Atlantic embark Pilots in Bahia Posesion, 30 miles to the West side of the Eastern entry of Magellan Strait. Pilot vessel is a landing craft called "Concon" which has radio-telephone frequencies of 2,182 and 2,638 kc/s. Four hours before arrival of the vessel, the craft keeps watch on 2,182 kc/s. Craft carries International Pilot lights; the hull is black and yellow with white housing. ETA at Bahia Posesion has to be given at least 24 hours in advance. In bad weather, vessel to anchor and wait in Lat. 52° 17′ 5″ S., Long. 69° 12′ W. Pilots usually board near the buoy of Banco Narrow and disembark off the lighthouse of Punta Delgada.

The Pilot for West-bound vessels travels to Bahia Posesion by air from Valparaiso. It is therefore important to order the Pilot through Valparaiso Agent with as much advance notice as possible, and keep Agent closely advised of vessel's ETA.

For vessels transitting Magellan Straits Westbound, the Pilot will disembark at Valparaiso. Pilot's travelling expenses from and to Valparaiso are included in pilotage charges.

It is advisable to have the accommodation ladder rigged as the Port Authorities will board prior to berthing if cargo work is to commence immediately.

ANCHORAGE: Recommended anchorage area is 4-5 cables from the head of the Fiscal Quay, 11 fathoms depth. Anchorage is prohibited within 300 m. of the quay.

RESTRICTIONS: No tidal restrictions, vessels can come alongside day or night.

BERTHING: The pier is 372 m. long with 36 ft. depth at the seaward end, reducing to 28 ft. on both sides toward the land. Vessels berth bow first, and care must be taken to avoid the shallow patches on both sides of the jetty about 120 ft. off. Normally 4 headlines, 4 stern lines and 2 or 4 springs are used.

Berthing is usually at night or early morning as strong winds blow during the day, occasionally rising to Force 12 in the Summer. The port is often closed due to inclement weather.

Weather signals are shown at the North end of the pier.

Weather	*Signal Day*	*Signal Night*	*Meaning*
Variable	Black Ball	1 green light	Put out extra moorings
Bad weather	Flag M	1 red light	Put out extra moorings
Storm	Flag R	2 red lights	Port closed

Tankers: See below. No limits for vessels at anchor.

Magellan Straits: Max. draft 70 ft., no limit on d.w.t. tonnage for very large vessels. Vessels with a draft in excess of 70 ft. may be allowed to pass through but only after the authorities have studied the vessels characteristics. As a safety measure large vessels navigate the First Narrows in daylight only and with good visibility. Also see "Shipmaster's Report" before first port.

HEALTH: At first Chilean port, doctor will come aboard with Authorities. In other Chilean ports there is no need to ask for pratique or to hoist the "Q" flag as pratique is automatic.

RADIO: There are 2 radio stations: *(a)* CBM Radio Naval of Magallanes permanent watch on 500 kc/s. Telegraphy (A1). *(b)* CBM2 Radio Costera Magallanes operating from 0830 to 1830 hrs. on frequencies 4390, 8694 (transmitting) and 4085, 8360 (receiving).

TUGS: Not normally used to go alongside in Punta Arenas but only to berth in tanker terminals – ship's lines used.

STEVEDORES: Gangs to be requested 24 hours before arrival. Loading/discharge rate depends on type of cargo but can be estimated at an average of 15 tons/hour/gang. According to the working rules of this port, when a vessel starts its operations of loading or discharging without working overtime, it has to follow them for the whole time, but if it starts working with overtime, it must continue doing overtime every day.

MEDICAL: No advance notice to Agent required. There is a hospital with all facilities. International anti-smallpox vaccination required to go ashore.

TANKERS: There are the following terminals for tankers:

Lenadura: Position 53° 12′ S. 70° 54′ W. Max. length 160m., draft 30 ft., 18,000 d.w.t. Vessels moor to 3 buoys, 1 astern and 1 on each quarter, using both anchors. Ship's head Bearing 090°T. Manifold Connection 8 in.

Cabo Negro: Position 53° 01′ S. 70° 51′W. Max. length 170 m. Draft 30 ft., 25,000 g.r.t. Vessels berth port side alongside, using the starboard anchor, and a stern line to a warping buoy 180 m. off the jetty. The manifold hose is 10 in. Gas is loaded at 1,000 t.p.h. A tug is usually available for berthing.

A new pier is expected to be completed in 1978 to service a new liquefying plant and will handle vessels of up to 70,000 d.w.t.

Clarence Cove: Position 52° 55′ S. 70° 09′ W. Max. length 200 m. Max. draft limited by the entrance to the cove to 33 ft. Vessels berth to 4 buoys, using both anchors. 4 headlines, 3 stern lines, 4 lines to the starboard quarter buoy, and 3 to the port quarter buoy are required. A tug is available. Ship's head 255°T. There are two 8 in. hoses for loading and deballasting facilities will be available shortly.

Port Percy: Position 52° 54′ S. 70° 14′ W. Max. length 400 ft., draft 33 ft. vessels use both anchors, vessels head on 242°T. 10 lines are required to the 4 buoys, 3 headlines, 3 to the starboard quarter, 2 astern and 2 to the port quarter. Wires must not be used. There is a 10 in. line for gas loading, with a 6 in. return line. Load rate 250 t.p.h. A 4 in. line is also available for diesel. Load rate 50 t.p.h

Gregorio: Position 52° 38′ S. 70° 11′ W. Max. length 650 ft. Max. draft 42 ft. (subject to tidal conditions), 75,000 d.w.t. Vessels moor with Ship's head 232°T, using both anchors to 8 or 9 shackles. 14 mooring lines are required to 4 buoys. There are two 10 in. and 8 in. floating hoses for loading crude oil. Loading rate 1700 cu. m./hr. Deballasting facilities are being installed, although at present clean ballast must be discharged to the sea.

DENSITY: 1025.

FRESH WATER: Only available at Punta Arenas Quay through hoses at a rate of 8 t.p.h. In case of emergency it can be delivered by vessel of the Chilean Army, if advance notice is given.

FUEL: Only diesel oil available in Puerto Percy with advance notice of at least 7 hours. Also available ex-barge at Punta Arenas, capacity 300 tons (diesel). See "General" before first port.

FIRE PRECAUTIONS: Tankers are forbidden alongside at the quay.

DEVELOPMENTS: Port is being dredged to increase draft to 33 ft. in berths 1 North and 1 South.

GANGWAY/DECK WATCHMEN: Foreign vessels obliged to employ a watchman, except on Tanker Terminals.

OPENING/CLOSING HATCHES: Carried out by riggers. Crew from the vessel and stevedores not allowed to do this work.

CERTIFICATES: All international Certificates to be shown on arrival.

CUSTOMS ALLOWANCES: Quantity in possession of every member of the crew to be declared at the Customs.

IDENTIFICATION CARDS: Chilean International Police (Extranjeria) provides a provisional card to stay in the country. It has to be held each time a member of the crew goes ashore.

CONSULS:

Germany
Argentine
Austria
Belgium
Brazil
Greece
Holland
Italy
Norway
Paraguay
Colombia
Denmark
Spain
France
Great Britain
Peru
Sweden
Switzerland
Yugoslavia

REPAIRS: "Asmar" (Astilleros de la Armada) has a shipyard for small vessels up to 1,500 tons as well as a good workshop to effect floating repairs. Some nautical spares can be found.

REPATRIATION: Facilities for repatriation, subject permission of International Police (Extranjeria) and Maritime Authority.

AIRPORT: Distance to airport 18 km. national airline (LAN). Daily flights from and to Santiago. Argentina Airlines fly to Argentine cities twice a week.

TIME: GMT minus 4 hours.

HOLIDAYS: See "General" before first port.

POLICE/AMBULANCE/FIRE: Maritime Police tel. 22356; Fire 21212, 21264; Ambulance 22658.

TELEPHONE: There is no connection on the quay.

SERVICES: Compass and gyro compass adjusting can be done.

SHORE LEAVE: Crew allowed to go ashore in all ports of the area. Crew must be in possession of provisional Identity Cards issued by police.

SHIPMASTER'S REPORT: 1976.

Documents required by Research Ships:-

Clearance from Last Port.
10 Crew Lists.
3 Nil Passenger Lists.
3 Nil Cargo Declarations.
1 Health Declaration.
6 Lists of Personnel disembarking.
2 Stores Lists from each department.
2 Bonded Stores Lists.
2 Crew Manifests.

Pilotage: Vessel entered and sailed via Western end of Magellan Straits. No Pilot is available unless coming from the North. A radio message should be sent to "Commandante Naval Zona Terciera" requesting permission to proceed without a Pilot, giving ETA at Cabo Pilar and Punta Arenas. Messages should also be sent updating ETA and also when passing Cabo Pilar, the latter giving ETA at Paso Tortuoso and speed. This last information should be promulgated to "All ships". The reverse procedure applies when sailing.

Since we had not arrived with a Pilot on board, we waited for the Pilot about 0.25 mile off the jetty for docking. When we sailed, since it was a Saturday morning, I suggested we could manage without a Pilot for undocking. The Port Captain was agreeable to this, but he may have taken a different view had we been in a less convenient berth.

Time: Summertime is kept (GMT minus 3 hours), dates in force not known. (Ended 2nd weekend in March, in 1976).

Stores and Provisions: Available in limited quantity and range, and very expensive. There is no ship chandler. The Agent's runner will take the Catering Officer around the shops and market, purchasing the items required, and arranging collection and delivery to the ship.

Bunkers: Gas oil was obtained from Cabo Negro, a tanker terminal some 9 miles to the North. Vessel berthed alongside the jetty head of the terminal, designed for much bigger ships. There was no real problem with lines, although stern lines were very short nips. The forward lines ran to a dolphin connected to the jetty by a catwalk. The stern overhung the jetty head slightly. Docking and sailing can be done on slack water, but was straightforward, the starboard anchor being used to dredge down on to the jetty head, which lies East/West, with the prevailing wind blowing strongly from W.N.W. A boat is in attendance for running lines. Pilots are very capable and experienced. The berth may not always be available when the ship requires it, which might mean delays.

AUTHORITY: Maritime Governor of Punta Arenas.

QUINTERO: 32.47 S. 71.33 W.

PORT LIMITS: The seaward limit of the port is a line running 052° from the lighthouse at Los Molles to Punta Ventanilla.

DOCUMENTS:

1 Outwards Clearance Certificate from the last port of call.
1 Certificate of Dues in respect of lighthouses and buoys.
5 Cargo Manifests for the port.
5 General Manifests for cargo.
5 Manifests for Cargo in transit.
4 Lists of Passengers for the port.
4 Lists of Passengers in transit.
10 Lists of Crew Members.
5 Lists of Personal Effects.
1 Fumigation Certificate.
1 Maritime Health Declaration.

PILOTAGE: Pilotage is compulsory, to all except very small vessels. Pilot and port officals board when vessel is inside port limits. Usually boarding between 0700 hrs. and 2200 hrs. The accommodation ladder should be rigged on the starboard side.

ETA should be sent to Agent 72 hours before arrival, with confirmation 24 hours before arrival. The message should state if any special service is required, and additionally Masters are requested to inform CAPUERTO, Quintero.

ANCHORAGE: Vessels may anchor within port limits. The bay is well sheltered with ample room for manoeuvring. Vessels should keep clear of the S.W. portion of the bay, due to rocky nature of the bottom, and of the prohibited zone indicated on the charts. Larger vessels may anchor West of Punta Liles lighthouse, where there are depths greater than 20 m. with sand and mud bottom.

The anchorage at Ventanilla is an open roadstead, exposed to S.W. winds and swell, with the possibility of dragging anchors, especially in the Winter months.

RESTRICTIONS: Quintero Bay is entered between Point Ventanilla and Point Liles, entrance 2.5 miles wide, with a bight extending 1.5 miles towards the S.E.

Point Liles is surrounded by submerged rocks and reefs for a distance of 2 cables.

Tankers discharging at the buoy terminals may be required to disconnect hoses in the event of bad weather, to avoid damage to the installation.

MAX. SIZE: *S.B.M.:* up to 120,000 g.r.t.
Oil Multi-Buoy Terminal: up to 50,000 g.r.t.
Liquid Gas Multi-Buoy Terminal: up to 30,000 g.r.t.
Chilectra – Andina Quay: 160 m. LOA, draft 32 ft.

RADIO: The Naval Radio Station of Valparaiso also handles commercial traffic.

The Coastal Radio Service Station situated in the Port Captain's office, call sign CAPUERTO QUINTERO.

TUGS: No tugs available at Quintero, but they can be requested from Valparaiso, or through Agent.

TANKERS:
S.B.M. Quintero Terminal: The depth at the S.B.M. is 47 m. Max. size for berthing, length 342 m. Draft 25.5 m. (83 ft.). Manifold connection is 16 in. Ship's derricks must be rigged to carry a 12 ton lift. Max. pressure 200 p.s.i. Average discharge rate 8,000 t.p.h. for 25 API crude.

Gas berth: Max. size 15,000 tons. Max. draft 39 ft. Vessels drop both anchors, and moor to 3 stern buoys. Ship's head should lie on 285°. Hose connection 6 in. Discharge rate 240 cu.m./hr.

Vessels may moor or unmoor at any time at these terminals. Mooring warps must be more than 400 ft. in length.

ENAP: Max. draft 50 ft. Vessels berth to 3 stern buoys, using both anchors, ship's head on 305°. Manifold connection starboard side 10 in. Hose lift 6 tons. Normal pressure 100 p.s.i.

BULK HANDLING FACILITIES:
Chilectra Quay, Las Ventanas: Quay is 530 m. long with max. depth of 19 m. at the head of the quay.

Coal berth situated on the North side of the quay, equipped with mechanical discharging tower which loads up to 300 t.p.h.

The South side of the quay is used for loading copper concentrates, with the addition of 4 dolphins vessels up to 160 m., draft 30 ft., can now berth. Bulk grain can also be discharged here, although the loading tower, being fixed, requires vessels to shift berth to unload each hatch. The berth is exposed to a Southwesterly swell.

FRESH WATER: Available by barge from Valparaiso.

FUEL: Only available at Valparaiso. See "General" before first port.

MEDICAL: There is a small local hospital,and there is an ambulance service to Valparaiso. (20 miles away).

REPAIRS: Only minor repairs may be effected at workshops ashore.

CONSULS: Nearest at Valparaiso.

AIRPORT: Nearest commercial airports at Pudahuel and Cerrillos, near Santiago. Military airfield at Quintero may be used in emergencies, subject to necessary authorisation.

SHORE LEAVE: No restriction of shore leave. Crew must carry an Interpol Identity Card. Curfew at night. Also see "General" before first port.

SERVICES: Food, laundry, etc. can be supplied.

REPATRIATION: Possible.

TIME: GMT minus 4 hours.

TERMINAL OPERATORS: Empresa Nacional Del Petroleo (ENAP), Compania Chilean De Electricidad (Chilectra), Andean Mineral Company (ANDINA).

AUTHORITY: Quintero Port Captaincy.

SAN ANTONIO: 33.37 S. 71.37 W.

DOCUMENTS:
1 Customs Clearance Document.
2 Light Dues Certificates.
9 Cargo Manifests.
2 Crew Lists.
2 Passenger Lists.
2 Lists of Stores.
1 List of Personal Effects.
2 Baggage Declarations per passenger.
1 Fumigation Certificate.

PILOTAGE: As port is narrow, pilotage compulsory for entering or clearing the artificial port. Pilots board vessels about 1 mile outside the artificial port, weather permitting. Vessels should wait for Pilot in position bearing 159° and 1,800 m. from Panul Lighthouse.

ANCHORAGE: Vessels over 100 m. length must anchor in position bearing 240° and 1,400 m. from South mole beacon. Vessels under 100 m. length find good anchorage in sandy and muddy bottom, 20 m. deep in position bearing 240° and 650 m. from the above beacon. Only in event of bad weather or strong winds which prevent Pilot boarding vessels outside harbour vessels under 100 m. length can anchor inside North pool and wait for Pilot.

Mooring buoys: inside small or North pool, are 2 mooring buoys. Fiscal Buoy: situated at 280° and 170 m. from head of Port Authorities' pier can be used for vessels up to 31 ft. draft.

PSNC Buoy: Property of shipping company, situated at 185° and 500 m. from above pier, can be used for vessels up to 40 ft. draft.

RESTRICTIONS: San Antonio is a narrow and a difficult manoeuvring port, entrance to artificial port is subject to weather conditions and during hours the port is open.

Entrance is effected during daylight only. In emergency and specific cases (weather permitting) this can be done up to 2000 hours. Sailing permitted any time, day and night, weather permitting.

RADIO:

Station call sign	*Category*	*Frequency*	*Type*	*Receives*	*Transmits*		*Schedule*
San Antonio	(S)	2 Mc/s.	A 3	2182	2182	2000	H15-30
CBS 2		4 Mc/s.	A 3	4117.2	4422.2	4422.2	H30-60

Local Station CBS2 on 8,360 kc/s. from 1400–1900 hrs. Telephone 0800/1100. However it is advisable to use Radio Play Ancha, Valparaiso. Maritime Control can now be contacted on Channel 16 VHF.

TUGS: 2 tugs available. LLO-LLEO and KIWI.

BERTHING: *Location of Berths:* Berths 1, 2 and 3 situated on the South Mole. Length 452.5 m. Max. depth of water 28 to 31 ft. at LW. Also see "Developments".

Berths 6 and 7 situated on Central Pier. Length 322 m. Depth of water 12 to 28 ft. at LW.

Two more berths are under construction.

Mechanised mole: situated at head of South mole, Berth 1 for mechanised discharge of coal and bulk cargo. Vessels up to 110 m. length can discharge without any difficulty. Vessels over this length will have to be shifted to work number 1 and 2 hatches provided Berth 2 is available. The max. draft is 30 ft. Discharge rate 400 t.p.h.

Only when raining is work stopped. But as the ground swell is strong and the mole is not well protected, it is recommended that ships be provided with good fenders and moored in a secure manner.

Berth 1 has a grab discharge for coal, but is now mainly a grain berth. The tower travels over 100 m., but vessels may have to shift along the berth.

Central Pier: The Eastern side is used for tankers (Berth 6) and coastal vessels, Berth 7.

The Western side is out of use at present while extensions and improvements are made.

CRANES:
3 Coles cranes, 5 tonnes.
1 Coles crane, 20 tonnes.
12 Gantry cranes of 5, 7.5 and 10 tonnes.
9 Mechanical scoops.
18 Fork Lifts.
Railway trucks and lorries available on quayside.

STEVEDORES: 614 labourers, stevedores, tally-clerks, crane men, watchmen, etc. Cargo is worked expeditiously, especially copper. Port works from 0800 to 1430 hrs. and from 1430 to 2100 hrs.The rate of cargo handling capacity is as follows:
Loading: Copper 40–50 t.p.h. per hatch/gang.
Bagged cereals, 30–40 t.p.h. per hatch/gang.
General cargo, 30–40 t.p.h. per hatch/gang.
Discharge: Phosphates (bagged) 30–40 t.p.h. per hatch/gang.
Cereals 30–40 t.p.h. per hatch/gang with mechanical grabs.
General cargo, 30–40 t.p.h. per hatch/gang.
Mechanical scoop rate 50–80 t.p.h.

TANKERS: At Berth 6 there is a 12 in. manifold for luboils, and a 4 in. manifold for vegetable oils.

North Breakwater Mooring: Max. length 170 m. Draft 32 ft. Vessels berth to a stern buoy, hose comes on board on the starboard side. The tanks at present take caustic soda, but are being converted for petroleum and chemical products.

MEDICAL: Hospital with 100 beds and necessary surgeons.

FRESH WATER: All berths equipped with standpipes to supply fresh water direct to vessels at a rate of about 10 t.p.h., but during day rate may be less due to low pressure.

FUEL: Coal: in case of emergency, coal can be received by railway car from the mechanised plant at berth A, or by lighters.

Fuel can be supplied to vessels in case of emergency provided this is requested with sufficient advance notice. Also see "General" before first port.

GANGWAY/DECK WATCHMEN: Available.

OPENING/CLOSING HATCHES: Done by stevedores.

IDENTIFICATION CARDS: Required.

CONSULS: Brazil, France, Norway, Sweden and Italy.

REPAIRS: Three workshops; several slipways for repair of small craft.

REPATRIATION: Facilities exist.

AIRPORT: At Pudahuel near Santiago, national and foreign airlines services.

TIME: Local time GMT minus 4 hours.

GENERAL: *Fumigation:* All vessels arriving with a complete cargo of cereals are compelled to be fumigated according to Chilean law. To effect this, vessel is tied up at North mooring buoy. Only the hatches are fumigated and all crew members must go ashore.

Fumigation takes about 18-20 hours. It is recommended these vessels arrive provided with strong ropes (special nylon) and good fenders as protection against heavy swell.

SHORE LEAVE: Allowed. Also see "General" before first port.

DELAYS: S.W. winds generally blow at dawn calming at sunset, leaving a heavy and strong swell in the bay. It is therefore recommended to arrive at the port daybreak from September to March, so as to enter the artificial port immediately. South winds also develop a Northerly current. Fogs are frequent from November to March.

DEVELOPMENTS: Dredging will commence in 1979 to achieve a depth of 32 ft. 08 in.

AUTHORITY: Empresa Portuaria de Chile.

SAN VICENTE: 36.44 S. 73.08 W. (See Plan Book)

Also see "General" before first port.

PORT LIMITS: East of meridian from Punta Pardo and South of parallel from Punta Hualpen.

PILOTAGE: Compulsory. Pilot boards inside the port limits. Pilot will designate anchorage. Accommodation ladder must be rigged if the vessel is at anchor awaiting berth as the Port Authorities will board. Pilots are arranged by Agent.

RESTRICTIONS: Berthing or unberthing from 0600 hrs to 2400 hrs. weather permitting. For tankers daylight only.

MAX. SIZE: Draft only restrictions, can berth ships greater than 200 m. LOA and 42 ft. draft.

HEALTH: Port Authorities give Pratique on arrival.

RADIO: Radio Estacion Naval Talcahuano. 500 kc. A-1 H-24.
Costera Talcahuana 2182 A-3 H-24.
Radio Estacion Naval Valparaiso. A-1 and A-3 all frequencies H-24.

VHF: Channel 16 safety and calling.

TUGS: 1 Tug available. Joins vessel at the same time as Pilot.

BERTHING: *CAP. Pier:* North, length 240 m. draft 33 ft. at any time, Salt water; South, length 200 m. draft 26 ft. at any time.

General Cargo Berth:
Pier 1: Length 220 m., draft 34 ft. at any time, ships' own gear.
Pier 2: Length 215 m., draft 36 ft. at any time, 2 cranes for bulk cargoes, for general cargo ships' own gear.

Comap Berth "A": Vessel moors with starboard anchor with 7 shackles and 3 lines to 2 buoys astern. Max. LOA 150 m. 1 hose with 8 in. connection on port side midships. Gasoline, kerosene, diesel oil and jet fuel handled. 1 tug and 1 mooring launch available.

ENAP Berth "B": Vessel moors with 2 anchors with 8 shackles on starboard, and 3 lines to 3 buoys astern. Max. LOA 250 m. or up 42 ft. draft. 1 tug and 2 mooring launches required. 3 hoses with 8 in. connections for crude and fuel oil. Handling rate 1,500 cu.m./p.h.

ENAP Berth "C": Vessel moors with both anchors, using 9 shackles starboard side, and 3 lines to 3 buoys astern. Max. LOA 200 m. and 36 ft. draft. 1 tug and 1 mooring launch required. 2 hoses with 8 in. connections, 1 for fuel oil rate 900 cu.m./p.h. can also be used for crude. 1 hose for gasoline, kerosene, turbo, diesel and liquid gas.

STEVEDORES: Through Agents.

MEDICAL: Good hospitals, no special notice required.

DENSITY: Salt water.

FRESH WATER: Available at all piers.

FUEL: Diesel by truck or rail road at piers, or at buoy berths.

CONSULS: West Germany, Argentina, Peru, Bolivia, Belgium, Colombia, Ecuador, Spain, France, Great Britain, Netherlands, Italy, Norway, Paraguay, Sweden.

REPAIRS: Deck and Engine workshops.

DRY DOCKS: ASMAR for large vessels.

SURVEYORS: Lloyds, N.V., B.V., N.K.K., A.B.S., G.L.

WATCHMEN: Gangway watchmen compulsory. Deck or Hatch watchmen optional.

HATCHES: Open and closed by riggers gangs.

CARGO GEAR: Ships gear. 2 cranes for bulk cargoes, rate 200 t.p.h. Heavy lift crane with 50 tons capacity.

REPATRIATION: There are facilities for crew changes.

AIRPORTS: 1 airport for internal flights.

POLICE/AMBULANCE/FIRE: Available in the port.

INDENTIFICATION CARDS: Immigration provide indentification cards.

SHIPMASTER'S REPORT: 1977.

Documents:

Customs:
- 2 copies list of Ammunition.
- 7 copies Cargo Manifest.
- 4 copies Stores List.
- 4 copies Personal Effects List.
- 4 copies Crew List.
- 4 copies Passenger List (or negative).

Port Captain:
- Clearance from Last Port.
- 2 copies Crew List.
- 2 copies Passenger List (or negative).

Police:
- 2 copies Crew List.
- 2 copies Passenger List (or negative).

Health Inspector:
- 1 copy Declaration of Health.
- 1 copy Vaccination List.
- 1 copy Passenger List (or negative).

Agent:
- 1 copy Crew List.
- 2 copies Passenger List (or negative).
- 2 copies Stores List.
- 2 copies Personal Effects List.

Navigation: Bay of San Vicente is entered between rock "Villa de Burdeos" and "Point Gualpen".

There is a traffic route for vessels leaving and entering Bay San Vicente. The separation zone bounded by lines connecting the following geographical positions: 73° 10.7′ W., 73° 10.6′ W. and 73° 09.7′ W., 73° 09.8′ W. Vessels inbound should keep close South of this separation zone and vessels outbound close North of the separation zone.

In the traffic route, Pilot boarding position and the anchorage, the depth is 36 ft. Maximum permissible draft is 38 ft.

The wreck in position 36° 44.3′ S., 73° 08.6′ W. has been removed.

The present breakwater is under extension to 800 m.

Pilot: Pilotage is compulsory and the boarding position is about 36° 44.7′ S., 73° 09.8′ W. in Bay San Vicente, or 1 mile S.W. of rock "Villa de Burdeos" Gp. Fl. (2) 10 secs.

Anchorage: The anchorage is about 900 m. East of rock "Villa de Burdeos". The Pilot anchors the vessel.

Radio: Advance notice: Vessels bound for San Vicente must advise Port Captain by radio 24 hours before arrival giving information about ETA, draft, if vessel carries passengers or mail, and state of health on board. Cable address: "Marigot, Talcahuano".

Also ETA to pilot station, VHF Channel 16, 1 hour prior to arrival. Pilot station's name is "Gobernacion Maritima Talcahuano".

Tugs: At present there are 2 tugs in operation, 1 of which is a steam tug of low h.p. Tugs use ship's lines.

Pilot is in VHF contact with the tug(s) which assists in mooring and unmooring vessels.

Mooring method: Vessel approaches and enters the berth from South. Mooring and unmooring may take place also during hours of darkness, provided weather conditions are fair and visibility good.

When the vessel is near the berth, port anchor is usually let go and dragged or paid-out while a tug slowly pushes the vessel alongside.

The vessel is moored with 4 headlines and 2 springlines forward and 4 sternlines and 2 springs aft.

Wharves: The pier is 435 m. long and is provided with rubber fenders. A new pier 110 m. long is under construction. Depth alongside the pier is 36 ft. to 41 ft.

There are 2 cranes on the pier for grain or other bulk cargoes. Each has a capacity of 240 m.t.p.h. (grain).

Behind the pier is 41,975 sq.m. for log storage. There are railway tracks on the pier and the log deposit area. Logs are brought in by railway wagons.

Stevedores: Stevedores working hours are from 0800 – 1200 hrs. and 1400 – 1745 hrs. Overtime is from 1815 – 2100 hrs. Mealtimes from 1200 – 1400 and 1745 to 1815 hrs.

Logs are loaded with ship's gear and at present the capacity is max. 60cu.m. per log-gang per hour. Stevedores working rather slow but make very good stowage.

Medical: There is an ambulance station just outside the pier gate and good hospital facilities near the port.

Supply service: Bunkers, provision, fresh water and laundry are available.

Shore leave: All Crew members are issued with landing permit/identification card, which has to be returned before departure.

There is curfew from Sunday to Thursday 0200 hrs. – 0500 hrs. and from Friday to Saturday 0300 hrs. – 0500 hrs.

Time: Local time is GMT minus 4 hours but from second Saturday in October to second Saturday in March GMT minus 3 hrs.

Weather and time: During Summer the prevailing wind is S.W'ly. In the Winter and specially in the months May to August, the winds are N. and N.W'ly.

In general, the weather throughout the year is good, sometimes however, during Wintertime with a N.W'ly wind, weather may become too rough for cargo operations due to the swell and the vessel's heavy movements. In this case the Port Authorities may order the vessel to leave the pier and shift to the anchorage, however that is a rare occurrence.

Tidal difference is 1.50 m.

Advice: All store rooms on deck and in the accommodation should be locked. Crew members should lock their doors, even if they are leaving their cabins for a short period.

Crew members should also take care not to walk alone during late night time near or around the harbour area.

AUTHORITY: Gobernacion Maritima de Talcahuano.

TALCAHUANO (including Concepcion Bay): 36.42 S. 73.07 W.

DOCUMENTS: See "General" before first port.

PILOTAGE: Compulsory. Pilot boards vessel near Belen Lighthouse, 3 cables distance.

ANCHORAGE: Each berth has its own distinct anchorage point.

Berth	*Anchorage*	*Bearing*	*Depth*
Berth 2	Huascar	101° × 600 m.	21 ft.
Berth 3	,,	101° × 900 m.	24 ft.
Berth 4	,,	101° × 1200 m.	27 ft.
Berth 5	,,	101° × 1500 m.	30 ft.
Berth 6	,,	088° × 1000 m.	30 ft.
Berth 7	Mole 500 (Sth. Encl.)	104° × 820 m.	28 ft.
Berth 8	,, ,,	136° × 400 m.	21 ft.
Berth 9	Explosives Anchorage	36° 06′ S. 73° 04′ 08″ W.	

Vessels in quarantine are moored 182° from Belen Lighthouse and 7 cables distant. Vessels carrying explosives are moored in same direction but 9 cables from Belen Lighthouse.

RESTRICTIONS: Port works from 0800 hrs. to 1200 hrs. and from 1400 hrs. to 1800 hrs. Only 6 vessels can moor alongside quay at one time.

MAX. SIZE: Vessels of 28 ft. draft and 195 m. in length can moor on the East side.

RADIO:

Station call sign	*Category*	*Frequency*	*Type*	*Receives*	*Transmits*	*Schedule*
Talcahuano	(S)	6 Mc/s.	A 1	6265	6414.5	H00-30
CBT-4		4 Mc/s.	A 3	4085.2 6280	4390.2	H30-60

TUGS: Port has 2 tugs, one of 120 h.p. and the other of 115 h.p., Shipyard has 2 tugs each of 600 h.p.
BERTHING: *Fiscal Pier:* Length 400 m. The old pier is now being rebuilt and extended.
Berth 1. Max. draft 28 ft. Berth 2 Max. draft 26 ft., but being increased to 28/30 ft.
Mole 500/Naval Pier. Max. vessel size: Length 230 m. Draft 27 ft. 4 headlines, 4 stern lines and 2 springs required. Ships gear used for cargo handling.

Passenger Mole: At a distance of 80 m. from the Fiscal Quay and on the Blanco Encalada Mole is the Passenger Pier with concrete steps for passenger traffic.

Chacabuco Quay: Situated in the Inner Harbour for repairs. Vessels up to 21 ft. draft can moor. No railway line or cranes, therefore vessels must work with own derricks to vans. "Asmar" tugs are used for mooring.

Concepcion Bay:

Lirquen Private Pier: Pilot boards off the end of the pier. Max. length 180 m. Vessels use maximum chain on both anchors, ship's head lying on 340°T, and a stern quarter buoy is used. Vessels require 4 headlines, 4 stern lines, and 4 springs.

Penco Private Pier: The pier is 1700 m. long ending in a platform on which stands a fixed base rotary crane. Vessels bows lie on 348°T, both anchors used to final shackle. There are 4 buoys, 1 on each bow, 1 astern, and 1 on the starboard quarter. Vessels also tie up to 3 dolphins on the East side of the pier. 12 × 600 ft. mooring lines are required and also 2 springs. A tug is required. The berth is exposed to strong Northerly winds, and vessels must be prepared to leave at short notice.
CRANES: 4 × 5 ton Portal crane on the Fiscal Pier. One floating crane 180 tons. One mobile crane 30 tons.
STEVEDORES: 12 gangs available. Loading: assorted goods 12 t.p.h./gang/hatch. Cereals 25 t.p.h./gang/hatch. Timber 100 t.p.h./gang/hatch. Newsprint 20 t.p.h./gang/hatch.

Discharge: assorted goods 12 t.p.h./gang/hatch. Bagged cargo 25 t.p.h./gang/hatch.

When loading is carried out by means of lighters, this is usually done from privately owned moles belonging to the principal commercial firms of the port from their warehouses situated inside the Morro Channel. Working hours are 0800-1430 and 1439-2100. Also see "General" before first port.
MEDICAL: Public hospital with board and sanatorium for infectious/contagious diseases. In addition, private clinics and a naval hospital.
FRESH WATER: Occasionally available on berth 2.
FUEL: Can be supplied only to vessels moored alongside quay and this in small quantities up to 100 tons, by means of cistern-truck or in drums. Also see "General" before first port.
GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: Done by stevedores.
IDENTIFICATION CARDS: required.
CONSULS: Brazilian and Norwegian consulates. At Concepcion the following:

Argentine
Belgium
Bolivian
British
Colombian
Danish
Ecuadorian
El Salvadorian
French
Finnish
Guatemalian
German
Dutch
Honduran
Italian
Mexican
Paraguayan
Panamanian
Peruvian
Swedish
Swiss
Spanish
Uruguayan
Venezuelan

REPAIRS: "Asmar" or the navy workshop has capable personnel and modern equipment to effect all kinds of repairs, not only to hull, but also to engines, boiler plates, welding, carpentry and electrical works. Chilean Navy has high-sea tugs to effect salvage and assist vessels in danger. 3 private-owned workshops, which can effect small repairs to vessels afloat. Several slipways for construction and repair of small craft.
DRY DOCKS: Naval shipyard and workshops have 2 dry docks, Dock number 1 is 180 m. long by 30 m. wide (605 ft. long by 57 ft. wide). Dock number 2 is 250 m. long by 40 m. wide (800 ft. long by 110 ft. wide).

Two floating docks: one 200 ft. long by 30 ft. wide for vessels up to 1,000 tons, and the other 333 ft. long by 50 ft. wide for vessels up to 3,500 tons. There is also a workshop for repairs to be effected afloat. There are 6 anchored mooring buoys used by vessels when entering Dry Dock 2.
REPATRIATION: Good facilities exist.
AIRPORT: Hualpancillo is situated between Talcahuano and Concepcion, 7 km. N.W. of Concepcion. Lan-Chile has connections from this airport with all the towns of the country from Arica to Punta Arenas and abroad.
TIME: Local time is GMT minus 4 hours.
SHORE LEAVE: Allowed.
GENERAL: South wind affects vessels only when moored outside the port zone. Weather signals are indicated on Signal Station of Port Authorities' Building.
AUTHORITY: Empresa Portuaria de Chile.

TALTAL: 25.24 S. 70.29 W.

DOCUMENTS: See "General" before first port.
PILOTS: No official pilot station at Taltal. If professional assistance required vessel should give ETA 24 hours in advance via Valparaiso Radio. Pilot boards at the anchorage. International code signals used. Harbour Master's office can be contacted by radio-telephone on the following frequencies: 2152, 2708 and 4396.6 kc/s.
ANCHORAGE: Sheltered deep-water anchorage suitable for any size vessels. Locations of designated areas marked on the chart.
RESTRICTIONS: Port closed in Summer from 2000 to 0600 hrs; in Winter from 1900 to 0700 hrs.
MAX. SIZE: Limited only by depths in anchorage.
HEALTH: Vessel boarded on arrival by Health Inspector.
RADIO: Radio Naval de Valparaiso or Radio Naval de Arica. Use CBT on 2182 kc/s. and 2783 kc/s. A3 on the half hour from 0800 to 1800 hrs.
TUGS: One privately owned tug may be called on to assist if necessary.
BERTHING: No berths alongside shore. Vessels work cargo in open anchorage. One buoy berth for tankers. Mooring, unmooring in daylight only. 6 in. hoses for discharging fuel and diesel.
STEVEDORES: At least 24 hrs. advance notice of ETA required to arrange gangs. Also see "General" before first port.
TANKERS: *Caleta Ossa Mooring Berth:* Vessels berth to 2 stern buoys, using both anchors. Ship's head on approximately 225°T. Depth of water 47 ft. A Pilot is required and comes from Antofagasta.
Antofagasta.
MEDICAL: Doctors and hospital facilities available. Advance notice desirable.
FRESH WATER: Not available.
FUEL: Not available.
IDENTIFICATION CARDS: Required by all crew members.
CONSULS: There are no local representatives.
REPATRIATION: No facilities for crew change or repatriation.
AIRPORT: Situated 25 km. away. Four internal flights a week, two Northward and two Southward.
TIME: GMT minus 4 hours.
HOLIDAYS: See "General" before first port.
TELEPHONES: There is no telephone service.
SHORE LEAVE: Allowed.
AUTHORITY: Capitania de Puerto.

TOCOPILLA: 22.05 S. 70.11 W. (See Plan Book)

DOCUMENTS: See "General" before first port.
ANCHORAGE: A good anchorage can be found 3 cables N.W. of the moles.
PILOTAGE: Compulsory. Pilot will board between 0700 and 2000 hrs. 7 to 10 cables North of the moles.
MOORING: The port has 3 buoys for mooring vessels of any tonnage, and which are used exclusively by ships discharging or loading general cargo and bagged nitrate, 2 buoys for the discharge of oil carriers. The depth of these moorings range from 15 to 30 m.
RESTRICTIONS: Ships are boarded by Pilot and Port Authorities up to 2100 hrs. On special request from the Agent, vessels are received up to midnight.
HEALTH: On arrival vessel boarded by Sanitary surgeon, who will grant full Sanitary Pratique valid for all Chilean ports of call in the present voyage. In cases of suspected disease he will determine if patient or patients should be removed to local hospital, and if feasible declare the affected vessel Sanitary cleared.
RADIO: All calls should be directed via Arica or Iquique Naval Radio Station.
TUGS: No tugs are used for mooring or unmooring of ships.
BERTHING: All berthing is done during daylight; night time only on special occasions, and by Agent's request.

Nitrate Plant: Max. draft 32 ft. The telescopic arm can rotate and deliver over a length of 160 m. Rate 1,000 t.p.h. Vessels must have their cargo gear swung out to starboard prior to loading. Vessels berth port side alongside.

Sulphate Mooring Berth: Vessels berth to 3 stern buoys using the starboard anchor. Ship's head on 276°T.

Lighters' Berths: Vessels berth to a stern buoy, using starboard anchor, ship's head on 265°T. There are 3 berths 410 m., 610 m. and 810 m. North of No. 1 mole.

The port has 36 lighters. Working hours 0800–1200, 1400–1800 and 1800–2100.
STEVEDORES: Number of gangs required for loading and/or loading operations should be radioed 24 hours in advance, indicating last ETA. Also see "General" before first port.
MEDICAL: In case of urgent need of a surgeon on arrival the Master should request medical assistance by radio to Agent and/or Port Captain. Hospital available with moderate facilities.
TANKERS: Two buoys used for oil discharge. One of them belongs to Cia de Cobre Chuquicamata – (CODELCO) and operates with 2 lines of 8 in. diameter each line, the other buoy is property of Sociedad Quimica y Minera de Chile S.A. and has 2 lines of 8 in. diameter for discharge of oil, and 1 line 4 in. in diameter for diesel oil only.

Power Station Oil Terminals: Vessels berth stern onto a buoy with 2 stern ropes, and a further 3 stern lines are passed ashore. Both anchors are required and ship's head lies 270°T. Depth of water 44 ft. Fuel oil is discharged through to 8 in. flexible submarine hoses. Max. length 220 m. Draft 38ft.

The manifold should be not more than 80 m. from the stern.

FRESH WATER: None available.

FUEL: None available.

GANGWAY/DECK WATCHMEN: Compulsory to employ services of a deck or gangway watchmen.

OPENING/CLOSING HATCHES: Ship's crew not allowed to work in port opening or closing hatches. Riggers' Union should be employed, 1 foreman and 8 riggers.

CERTIFICATES:

Tonnage.
Deratisation.
Radio.
Chilean Light Dues Certificate.

CUSTOMS ALLOWANCES: No special restrictions.

CARGO GEAR: Gear that complies with standard Port Safety Regulations.

IDENTIFICATION CARDS: Necessary.

CONSULS: Only Norwegian Vice-Consulate.

REPAIRS: Facilities only for minor repairs.

REPATRIATION: There are facilities.

AIRPORT: Nearby, but soon to be closed.

TIME: Local time GMT minus 4 hours.

HOLIDAYS: See "General" before first port.

POLICE/AMBULANCE/FIRE: Police Headquarters 32; Hospital 231; Fire Department 84.

TELEPHONES: No facilities for placing telephone lines aboard.

SHORE LEAVE: Allowed.

REGULATIONS: Not allowed to pump oil or dirty water from bilges or throw rubbish overboard while anchored.

DELAYS: Probable on surf days, mainly in the months of June, July and August.

AUTHORITY: Port Captain.

VALPARAISO: 33.02 S. 71.39 W. (See Plan Book)

DOCUMENTS:

1 Clearance.
1 Light Dues Certificate.
7 Port Cargo Manifests.
4 General Cargo Manifests.
7 Transhipment Cargo Manifests.
3 Passenger Lists for the Port.
3 Passenger Lists for Transit.
18 Crew Lists.
1 Personal Effects List.
Passenger Baggage Declaration (2 per passenger).
1 Fumigation Certificate.

PILOTAGE: Compulsory. Pilot must be waited for in position bearing 116° and 1,830 m. from Punta de Angeles Lighthouse.

ETA: Port Authorities require 24 hour, and 4 hour notice prior arrival.

Prior berthing, vessels have to be cleared by Port Authorities. After 2100 hrs. Authorities will not come on board and ship has to wait until the next morning.

ANCHORAGE: Outside the harbour and close by vessels find good anchorage in 25–15 fathoms of water. It is always prudent to secure a good anchorage owing to possible strong winds during all periods of the year and causing heavy swells.

In Winter, vessels anchor with one anchor with full chain and have another ready for emergencies. During Winter it is not convenient to anchor near the coast due to the risk of dragging; during Summer the nearer to coast, the better.

With the object of keeping clear the entrance to Valparaiso Bay and to assure a proper anchorage when arriving at this port, the Harbour Master has fixed the following anchorages according to arrival, so that vessels may proceed to berth in order of arrival.

Anchorage No.			
1	104° True and	980 m.	from breakwater's red light.
2	099° ,,	1,400 m.	,, ,,
3	079° ,,	820 m.	,, ,,
4	083° ,,	1,220 m.	,, ,,
5	056° ,,	980 m.	,, ,,
6	066° ,,	1,340 m.	,, ,,
7	070° ,,	1,730 m.	,, ,,
8	041° ,,	1,250 m.	,, ,,
9	052° ,,	1,550 m.	,, ,,
10	059° ,,	1,900 m.	,, ,,

If any vessel does not occupy the anchorage assigned, she shall be shifted by a Pilot of the Harbour Master's Office for Account of Owners.

Should the ten anchorages be occupied when vessel arrives, a provisional one shall be expressly given by the Harbour Master's Office to the vessel that requires it.

RADIO: Naval Radio Station of Valparaiso in Playa Ancha which attends the public maritime service. Coastal Radio Service (SRC) with its station situated in the Port Captaincy Building, also attends the public maritime service, both national and foreign (CB V-2).

Station Call Sign	*Category*	*Frequency*	*Type*	*Receives*	*Transmits*	*Schedule*
Valparaiso		8 Mc/s.	A1	8354	8478	H00–30
CBV–2				8374		
		12 Mc/s.	A1	12531		
				12561	12714	H00–60
	(C)	16 Mc/s.	A1	16708		
				16748	17285.6	H30–60
		4 Mc/s.	A3	4117.2	4422.2	H00–45
		8 Mc/s.	A3	8223.6	8773.6	H45–60

VHF: Pilot boat is not equipped with VHF. The only VHF contact can be done via tug-boat *Ultramar I.*

TUGS: There are 4 tugs without considering those belonging to the Navy. The Cia. Sud-Americana de Vapores has one tug: "El Aguila".

BERTHING:

Berths	1	2	3	4	5	6	7	8	9	10
Length (m.)	175	175	260	200	165	245	120	240	220	205
Depth (m.)	9.5	9.5	10.5	9.5	8.2	8.5	9.5	9.5	9	9
Quay cranes	5	5	5	3	—	7	2	7	4	—
Telephone	1	1	1	1	1	1	—	1	1	—

Berthing in Daylight only.

STEVEDORES: The stevedoring syndicate has 397 registered members and 108 substitutes. Working hours are 0800–1430, 1430–2100.

MEDICAL: Several hospitals and clinics with qualified staff.

FRESH WATER: Delivered by hoses connected to the existing standpipes. The quality of the water is good and can be delivered at the rate of approximately 20 t.p.h. The couplings are 2.5 in.

FUEL: Coal: The Lota-Schwager Coal Company can deliver coal direct to vessels or trucks from quay or lighters.

Oil: Copec, Shell Chile, or Esso Standard Oil deliver petroleum or diesel oil in any quantity needed by pipe-line at Salinas, approximately 5 miles North of the port, mooring vessel in 7 fathoms water to special buoys and embarking a Pilot at Valparaiso Port. Delivery is at a rate of 180–200 t.p.h. There is also a barge with a capacity of 180 tons for delivery in Valparaiso Bay itself. Diesel oil can be delivered from tank cars by pipe at the quay.

GANGWAY/DECK WATCHMEN: Available and are to be used by Law.

OPENING/CLOSING HATCHES: To be carried out by the stevedores by Law.

CUSTOMS ALLOWANCES: No unusual restrictions.

IDENTIFICATION CARDS: Required.

CONSULS: Consulates General:

Argentina
Bolivia
Brazil
Columbia
Ecuador
Germany
Greece
Guatemala
Italy
Norway
Panama
Peru
Spain
Sweden
Venezuela

Consulates:

Belgium
Cuba
Denmark
Dominican Republic
El Salvador
Finland
France
Great Britain
Haiti
Holland
Honduras
Monaco
Nicaragua
Paraguay
Switzerland
United States
Uruguay

REPAIRS: Several shipyards, workshops and foundries for repairs to hull, boilers, machinery and engines. The principals are Astilleros y Maestranza Las Habas which have their own quay, tugs, lighters and working equipment afloat, and Asmar, belonging to the Navy. There are several other smaller shipyards for construction and repair of minor craft.

DRY DOCKS: Floating dock, vessels up to 4,500 tons, 365 ft. length by 56 ft. breadth and a depth of 20 ft.

REPATRIATION: Facilities available.

AIRPORT: International airport at Pudahuel, 90 km. from Valparaiso. Los Cerrillos is the nearest airport. From Pudahuel, Lan-Chile maintain daily services to Arica to the North and to Punta Arenas with stops at all the principal towns.

TIME: Local time October to March, GMT minus 5 hours. March to October, GMT minus 4 hours.

HOLIDAYS: See "General" before first port.

SERVICES: Compasses, radars, meteorological instruments and other nautical equipment can be tested and fixed. Charts and maps can be obtained from the Chilean Navy Navigation and Hydrographic Department.

SHORE LEAVE: Allowed.

WEATHER: A weather report showing the condition at various points off the coast of Chile can be obtained from the Oficina Meteorological Chile twice a day. A general rule for the next day's forecast: the weather condition at Juan Fernandez Islands will be 24 hours later than the conditions at Valparaiso.

PORT REGULATIONS: It is strictly prohibited to dismantle the main engine or effect repairs to the engines without previous notification and authorisation from the Maritime Authorities. Also, to unballast petroleum pump bilges, throw overboard waste or refuse in the artificial port.

AUTHORITY: Empresa Portuaria de Chile.

Chinese People's Republic

Up-to-date information of port entry requirements for Ports in the Chinese People's Republic are unobtainable.

We have been advised by the Head Office of the China Ocean Shipping Agency at Peking that Ship Masters of foreign vessels calling at Chinese Ports should contact the Branch Office at the Port concerned (cable address "Penavico") in order to be provided in due time with necessary information relating to port entry requirements.

We hope that in due course all necessary information will be passed to us by the Authorities and should this be the case, such information will be included in later editions.

DOCUMENTS:

First Port

1 Maritime Declaration of Health.
2 Reports of Entry for foreign ships.
6 Crew Lists.
1 List of Specified Articles (money, gold and silver).
1 Report of Articles Restricted for use in Port.
4 Passenger Lists (if carrying passengers).

Subsequent Ports

1 Report of Entry for Foreign Ships.
5 Crew Lists.
1 Report of Articles Restricted for use in Port.

The list of money, etc., is carried with the ship from the first port.

All forms used to be Chinese. Navigational charts to be put away when boarded by Pilot and examination officer and boarding party.

SHIPMASTER'S REPORT:

The following information was received from a Master whose vessel was on charter to the China National Chartering Corporation, Peking.

Regulations governing the passage of non military foreign vessels through the Chiungchow Straits.

Article 1. According to "The Declaration of the Government of the People's Republic of China on China's Territorial Seas, the Chiungchow Straits (the Hainan Straits) are Chinese inland waters, where all foreign military vessels are prohibited from passing through. Any non military foreign in need of passing through the Straits must apply for permission in accordance with the present Regulations.

Article 2. For facilitating the control of the Chiungchow Straits, the Chinese Chiungchow Straits Authority of the People's Republic of China (hereinafter referred to as the Chinese Chiungchow Straits Authority) is hereby set up.

The present Regulations are to be carried out under the supervision of the Chiungchow Straits Authority.

Article 3. The water area which comes under the control of the Chiungchow Straits Authority (hereinafter referred to as the Control Area) is bounded temporarily as follows: West of the line connecting the Hainan Head Light Beacon (approx: 20° 09′ 37″ N. 110° 41′ 00″ E.) and San Kao Lung Light Beacon (approx: 20° 26′ 00″ N. 110° 30′ 22″ E.) (known as the East Line) and East of the line connecting Cape Kami Light Beacon (approx: 20° 13′ 30″ N. 109° 55′ 30″ E.) and Cape Lin Kou Light Beacon (approx: 20° 00′ 22″ N. 109° 42′ 06″ E.) (known as the West Line).

Article 4. Any non military foreign vessel passing through the Chiungchow Straits must comply with the following procedures:

1. Apply for passage permission by cable to the Chiungchow Straits Authority 48 hours before the vessel enters the control area, or before the vessel leaves the port of departure, giving detailed information on ship's name, nationality, gross tonnage, speed, hull colour, funnel marks, port of departure and destination as well as date and time of sailing.

2. After obtaining the passage permission, inform the Chiungchow Straits Authorities 24 hours before entering the control area or within 2 hours after vessel port of departure of the exact time of entering the control area.

All cables relating to the application and permission for the passage through the Straits are to be transmitted through the Haiou Branch of China Ocean Shipping Agency.

Article 5. Notification may be given by the Chiungchow Straits Authority, whenever it deems necessary, to cancel the permission already granted to those non military vessels for passing through the Straits.

Article 6. Passage through the control area by non military foreign vessels should be made in the day time only. They should enter the control area after sunrise and leave before sunset. On the basis of the ship's speed the Chiungchow Straits Authority shall fix the time for the non military foreign vessel concerned to enter or leave the Straits.

Article 7. Non military foreign vessels entering and leaving the Chiungchow Straits should pass through the middle channel, unless special permission has been granted by the Chiungchow Straits Authority.

Article 8. Non military foreign vessels passing through the control area should navigate within the following specified navigation area: North of the line connecting the point on the East line 4 nautical miles away from the Hainan Head Light Beacon to the point on the West line 4 nautical miles away from the Cape Lin Kou Light Beacon; and South of the line connecting the point on the East line 6 nautical miles away from the Hainan Head Light Beacon, the point 4 nautical miles due South of the Cape Paimi Light Beacon (approx: 20° 15′ 00″ N. 100° 17′ 00″ E.) and the point on the West line 14 nautical miles away from the Cape Lin Kou Light Beacon.

Article 9. Non military foreign vessels passing through the Chiungchow Straits must punctually observe the time as reported and comply with the stipulations on the limit of the navigation area. All vessels entering and passing through the control area should immediately answer and unconditionally comply with the signals from the shore or patrol ships. The vessels in question shall be held responsible for all consequences arising from non observance of the above stipulations.

Article 10. Non military foreign vessels passing through the Chiungchow Straits are not allowed to use radar. If the vessels are under the conditions of restricted visibility caused by dense fog, torrential rains, etc., which necessitates the use of radar, they should make an application to the Chiungchow Straits Authority, giving their reasons as well as the ship's position, speed, etc., and they may set ship's radar in operation when permission is obtained. In the case of emergency which endangers safety navigation of the ships, they may use their radar while making their application simultaneously; after that, they should submit a detailed account (report) to the Chiungchow Straits Authorities giving a full account, together with a statement of facts of the time as to when the radar set in use and when ended for the archives.

Article 11. Non military foreign vessels in passing through the Chiungchow Straits are not allowed to take photographs, soundings, or do any other things in violation of the laws and regulations of the People's Republic of China.

Article 12. Any non military foreign vessel violating the present Regulations shall be treated as follows:

1. Before entering the control area, the vessel may be ordered to stop proceeding and to round out by her original route, so as to sail around the Hainan Island; or, to wait until the necessary formalities are completed and the permission for passage granted.

2. In case the vessel has entered the control area, she may be ordered to stop and escorted to Haikou for inspections; and she shall be treated according to the findings after inspection. After that, the vessel may, as circumstances require, be allowed to pass through the control area, or ordered to return out from the control area, or even be escorted out of the Straits.

Regulations governing entry and departure of foreign vessels into and from Chinese Ports.

1. In addition to the Provisional Law Governing Customs and other relevant laws and regulations of the People's Republic of China, these Regulations shall be observed by all foreign vessels entering or leaving Chinese port(s).

The word "Port" named therein denoted Port(s) open to foreign vessels as approved by the Ministry of Communications of the People's Republic of China.

2. Masters of foreign vessels shall report to the Harbour Authorities through their port Agents a week prior to the vessel's arrival at the port of call (or if the time of run from the last port called at to the port of call is less than a week, then prior to vessel's departure from the port last called), of vessel's ETA, fore and aft draft on arrival, number of passengers and quantity of cargo on board for entry formalities. Masters are again to report 24 hours in advance to the Harbour Authorities through their port Agents, the exact time of vessel's arrival.

3. On entering or leaving port, foreign vessel's shall display the required signals and, in daytime, hoist their respective national flags.

4. On entering or leaving port, foreign vessels are subject to quarantine examination conducted by the Quarantine Authorities in accordance with the Frontier Quarantine Regulations.

5. Foreign vessels are not allowed to enter or leave port, or to navigate or to shift berths in the harbour without Pilots appointed by the Harbour Authorities.

6. On entering or leaving port, foreign vessels are subject to inspection by the local Harbour Authorities and other organizations in charge of inspection, in accordance with the provisions under the "provisional Regulations Governing Inspection of the Ship, Crew, Passengers and Baggage on Vessels Entering or Leaving Port".

7. After entering the port, Masters of foreign vessels shall submit to the Harbour Authorities a list showing description and quantity of arms and ammunitions onboard and of such articles as mentioned under item (b) of this article and shall observe the following provisions:

(*a*) Arms and ammunition to be sealed while in port;
(*b*) Radio transmitter, radio telephone, radar, radio direction finder, echo sounder, sextant, signal rocket, flare signal and signal gun shall not be used in the harbour.

In case of emergency or for despatching urgent messages, such articles as mentioned under item (b) may be used, but report shall be submitted to the local Harbour Authority immediately after using same.

8. After having berthed in port, Masters of foreign vessels shall prepare the foreign vessels Entry Report, Crew List, Passenger List and Import Manifest and submit same to the Harbour Authorities for checking up, at the same time, Masters shall submit the Certificate of Port Registry, Ship's Deck Log Book, Engineroom Log Book and other papers for examination.

Prior to the departure of foreign vessels, Masters are to prepare the foreign vessels Departure Report, List of Crew Replacement (Not required if no change made), Passenger List, and Export Manifest and submit same to the Harbour Authorities for clearance.

9. After the inspection has been conducted by authorities concerned, Crew members of foreign vessels, who wish to go ashore, may apply to the Frontier Inspection Office for landing permit.

10. No passengers and Crew members of foreign vessels are allowed to photograph and/or make sketches in the harbour.

11. While entering or leaving port or shifting berth in the harbour, foreign vessels are not allowed to take any other sounding than that taken by means of handlead with the consent and under supervision of the Pilot.

12. In case foreign vessels are involved in marine accident along the China coast, Masters are required to submit marine Accident Report to the local Harbour Authorities within 48 hours after vessel's arrival, should the accident happen in port, such report shall be submitted immediately.

13. The Harbour Authorities may prohibit foreign vessels from leaving port under any of the following circumstances:—

1. Violation of regulations governing safety and technical requirements such as those in connection with ship's papers, seaworthiness, stowage, supply and equipment or provisions of other regulations.
2. Failure to pay for any of the following:
   - (*a*) Port charges and expenses;
   - (*b*) Fines imposed upon the vessel on account of violation of laws and regulation.
   - (*c*) Compensation for damage done to harbour structures, navigation aids or to other properties in the harbour.

Foreign vessels may be released upon producing appropriate security sufficient to cover the payment of above items.

14. The Regulations, after being approved by the State Council shall become effective upon promulgation by the Ministry of Communications. The "Provisional Regulations governing the entry and departure of foreign vessels into and from ports of the People's Republic of China" promulgated by the Minister of Communications on the 20th March 1952 shall at the same time be repealed.

Guide to foreign vessels calling at Shanghai

1. Regular channel in Chusan area: Foreign vessels may navigate in the regular channel between Chusan and Raffles Island which is open to navigation, but are not allowed to navigate in other channels between these islands. (By the regular channel is meant the channel from Tongting Island, Steep Island, Elgar Island, Bonham Island, Button Island, Gutzlaff Island to Chang Kiang Kou).

2. Pilotage Area:

(a) Pilotage on vessels entering/leaving port commences from/termination at the position 31° 05′ N. 122° 10′ E. at Chang Kiang Kou.

(b) The Pilot vessel, when engaged on her pilotage duty, will anchor near 1 mile East of the entrance buoy No. 54 (31° 04′ 52″ N. 122° 10′ 00″ E.) at Chang Kiang Kou.

3. Anchorage awaiting for the tide:

(a) Foreign vessels may, when the draft at the time of entry is 25 ft. or less, proceed direct to the Pilot station (31° 05′ N. 122° 11′ 30″ E.).

(b) In the case of draft at time of entry is more than 25 ft. or it is impossible to arrive at the Pilot station at the declared ETA or impossible to proceed direct to the Pilot station for reasons of the tide, then the foreign vessels may anchor and wait for the tide near 1 mile N.E. of the Chang Kiang Kou Lightvessel. Such foreign vessels waiting there may telegraph to ask "Penavico" Shanghai for the time of arrival at Pilot station and picking up the Pilot.

4. Notice to Mariners:— Chang Kiand Kuo South Channel

(a) The Chang Kiang Kuo Light vessel No. 50 is as described below:
Location 31° 03′ 06″ N. 122° 21′ 12″ E.
Characteristic Flashing every 6 seconds.

(b) Vessels entering or leaving the port should pass the following buoys by keeping them on the vessels left side:

1. Fairway Buoy No 53:
Location 31° 03′ 46″ N. 122° 13′ 51″ E.
Characteristic Group flashing (3) every 6 seconds.
Shape – can shape with red and black horizontal stripes.

2. Entrance buoy No. 54:
Location 31° 04′ 52″ N. 122° 10′ E.
Characteristic Group flashing (3) every 10 seconds.
Shape – can shape with red and black horizontal stripes.

(c) No vessel allowed to enter the dangerous areas bounded by lines connecting the following points:

1. 30° 47′ 15″ N. 123° 03′ E.
2. 30° 47′ 15″ N. 123° 05′ 54″ E.
3. 30° 44′ 45″ N. 123° 03′ E.
4. 30° 44′ 45″ N. 123° 05′ 54″ E.

5. Telegraphic Communication:
Foreign vessels at sea may despatch radiograms to "Penavico" Shanghai via Shanghai Coastal radio station, the particulars of which are as follow:

Call sign: XSG
Calling frequency: 500 kc/s
Working frequency: 458 kc/s
Working Hours: 0000-2400

Answering frequency:		Listening frequency:	
8502 kc/s	GMT 0000-2400	8364 kc/s	GMT 0000-2400
6414.5 kc/s	GMT 2200-1000	6273 kc/s	GMT 2200-1000
12871 kc/s	GMT 0000-1400	12546 kc/s	GMT 1000-1400
4349 kc/s	GMT 1000-2200	4182 kc/s	GMT 1000-2200

6. Large number of fishing vessels around areas 25-30 miles N.E. of North saddle and 20-25 miles East of East saddle, Barren Island and Lukon Island, please navigate with caution.

7. Anchorage for awaiting tide – Changkiang Kuo:

(1) The water area bounded by lines connecting the following points is the anchorage of Changkiang Kuo for vessels awaiting tide:

31° 01′ 00″ N. 122° 24′ 42″ E. 31° 01′ 00″ N. 122° 20′ 00″ E.
30° 56′ 00″ N. 122° 20′ 00″ E. 30° 56′ 00″ N. 122° 24′ 42″ E.

(2) From 25th April 1970, all vessels are strictly prohibited to anchor at any place out of the said anchorage of Changkiang Kuo for waiting tides without obtaining permission (permits) by Shanghai Harbour Authority concerned.

Regulations for Merchant Ships passing through Liau-ti-shan Channel.

For foreign merchant ships navigating through Po Hai Strait, only Laiu-ti-shan channel and Chang-shan channel are open for passage and all the rest channels are prohibited from passing.

1. The water area within a radius of 10 nautical miles from Liau-ti-shan Light station and the water area within a radius of 7 nautical miles from North Hwang Ching Tau Light station are closed to shipping (navigation), while the channel between these 2 prohibited areas is to be open to navigation.

2. Information including name of vessel, nationality, call sign, last sailing port, port of destination, speed, colour of hull and funnel and exact time of passing through the adjoining lines of Liau-ti-shan Light station and North Hwang Ching Tau Light station should be submitted to the Dairen Harbour Administration Bureau 8 hours before the vessel reaches the aforesaid line. Foreign vessels may communicate with the Harbour Superintendent directly by addressing Harbour Master Dairen. In case there is any alteration of the expected time of passing through the line owing to bad weather, the vessel should immediately report to the Harbour Superintendent.

3. The calling sign of the Dairen Radio Station is XSZ, calling frequency 500 kc/s, working frequency 462 kc/s, 8694 kc/s, reserve frequency (working) 8678 kc/s. The station operates day and night.

4. Merchant vessels passing through the Liau-ti-shan Channel must display light signals in accordance with the Regulations for preventing collision at sea.

5. The water area within an area of 10 miles around Hai Mao Tao situated at Lat. 38° 52′ N. Long. 121° 01′ E. is prohibited from navigation.

Merchant ships are prohibited from navigating in the water area within a radius of 10 miles from the Reef Island.

Merchant ships violating the above regulations or navigating in the prohibited areas shall be held responsible for whatever consequences arising therefrom.

Guide to foreign vessels calling at Dairen:

1. When entering or leaving Dairen Harbour please pass through the channel between Daisansantao and Hwangpotsui. You are not allowed to navigate within area 2.5 miles radius from Daisansantao lighthouse 38° 51′ 50″ N. 121° 49′ 20″ E. and 1 mile radius from lighthouse Hwangpotsui 38° 54′ 14″ N. 121° 42′ 54″ E.

2. After entering joining line between Daisansantao and Hwangpotsui lighthouses, radar, radio transmitter and other forbidden articles are prohibited to use, in case of danger or necessity for transmitting emergency message you must report to Harbour Superintendency Administration immediately after you have used.

3. You are requested to wait for quarantine and Pilot within area bounded by lines connecting the following areas: 38° 57′ 02″ N. 121° 45′ 00″ E. 38° 55′ 30″ N. 121° 44′ 28″ E. 38° 57′ 02″ N. 121° 41′ 11″ E. 38° 56′ 19″ N. 121° 41′ 11″ E.

4. All merchant vessels are informed that vessels passing through the Liau-ti-shan Channel entering or leaving the port of Dairen, besides it ought to observe the regulations relating to the Liau-ti-shan Channel, must keep the way to navigate through the Southern water area beyond the tangent line joining from the Encounter Rock (38° 34′ 21″ N. 121° 38′ 12″ E.) to the outer verge of the Liau-ti-shan prohibited area and the Eastern water beyond Northward meridian line of the Encounter Rock to the continent.

5. Dairen coast radio station.
Call sign: XSZ
Calling frequency: 500 kc/s
Working frequency: 462 kc/s
Answering frequency: 8694 kc/s
Listening frequency: 8364 kc/s
Working day and night.

Guide to foreign vessels calling at Whampoa (Kwangchow).

1. Foreign vessels are prohibited to sail in the water areas of the joint lines among Vanshan, Chaieng and Tankan Islands, except the route as designated hereunder:

(a) The vessels calling at Whampoa from ports other than Hong Kong, should proceed from seaward to Lat. 21° 40′ 44″ N. Long. 113° 56′ 00″ E. and set course to 318°T, or to Lat 21° 37′ 30″ N. Long. 113° 37′ 45″ E. and set course to 047°T; proceed to Lat. 21° 47′ 45″ N. Long. 113° 49′ 32″ E. then alter course to 013°T; proceed to Lat. 22° 00′ 00″ N. Long 113° 52′ 34″ E., then alter course to 334°T; to Lat. 22° 05′ 36″ N. Long 113° 49′ 36″ E., then straight to Lafsami Pilot Anchorage waiting for Pilot.

The vessels of departure should sail along the opposite course and positions above mentioned, after disembarking Pilot at Lafsami Pilot Anchorage.

(b) The vessels calling at Whampoa from Hong Kong should proceed throught West Lamma Channel to Lat. 22° 08′ 44″ N. Long 113° 55′ 30″ E. then alter course to 295°T; to Lat 22° 12′ 04″ N. Long. 113° 47′ 41″ E. then alter course to 204°T to Lat. 22° 10′ 36″ N. Long. 113° 47′ 00″ E. then straight to Lafsami Pilot Anchorage waiting for Pilot.

The vessels departing for Hong Kong should sail along the opposite course and positions above mentioned, after Pilot disembarked at Lafsami Pilot Anchorage.

2. The position of Lafsami Pilot Anchorage:
Lat. 22° 07′ 20″ to 22° 08′ 30″ N.
Long. 113° 45′ 48″ to 113° 47′ 54″ E.

3. Kwangchow (formerly Canton) coastal radio station:
Call sign: XSQ
Calling frequency: 500 kc/s
Working frequency: 445 kc/s
Answering frequency: 8514 kc/s
Listening frequency: 8364 kc/s
Working day and night.

Guide to foreign vessels calling at Tsamkong

1. Pilot station: North Anchorage of Nau Chow Island.
Lat. 20° 58′ 21″ N.
Long. 110° 36′ 42″ E.

2. Tsamkong coastal radio station:
Call sign: XSJ
Calling frequency: 500 kc/s
Working frequency: 462 kc/s
Answering frequency: 8614 kc/s
Listening frequency: 8364 kc/s
Working day and night.

DAIREN: 38.55 N. 121.40 E.

ALL INFORMATION IS A SHIPMASTER'S REPORT.

GENERAL:

Regulations required to be observed by merchant vessels passing through the Laotiehshan Channel issued by the Harbour Master at Dairen.

1. The area with Laotiehshan lighthouse as centre and a distance of 10 miles as radius and the area with North Hwang Cheng Tao light beacon as centre and a distance of 7 miles as radius are prohibited areas. The middle channel between these 2 prohibited areas is the navigable channel.

Note: *(a)* Characteristics of Laotiehshan lighthouse (38° 43.7′ N., 121° 07.7′ E.): Lt. GP Fl. (2) ev. 30 sec. 25 m.

(b) Characteristics of North Hwang Cheng Tao light beacon (38° 23.7′ N., 120° 54.3′ E.): Lt. Fl. ev. 3 sec 15 m.

2. Merchant vessels intending to pass through the Laotiehshan Channel must send a wireless message to "Harbour Master, Dairen" at least 8 hours prior to the passage, reporting the following matters:

Ship's name, nationality, signal letters, port of departure, port of destination, speed, colour of ship's hull and funnel and the accurate expected time to pass the line-joining Laotiehshan lighthouse and North Hwang Cheng Tao light beacon.

Note: *(a)* Dairen Coastal Wireless Station: signal letters: XSZ, Calling frequency 500 kc/s.; Working frequency 462 kc/s., 8694 k/cs.; Reserve frequency 8678 kc/s.; Working day and night.

(b) If weather condition should cause any change in the expected time of the passage, the fact must be immediately reported to "Harbour Master, Dairen".

3. Merchant vessels passing through the Laotiehshan Channel must show the lights in accordance with the international regulations for preventing collisions at sea.

4. Vessels are prohibited from passing through the area with Hai Mao Tao (38° 52′ N., 121° 01′ E.) as centre and a distance of 10 miles as radius.

5. Any vessel violating any of the above-mentioned regulations will be held responsible for all consequences.

Rule governing the prohibited passage through the inner area of the Encounter Rock:

Vessels passing through the Laotiehshan Channel as well as entering or leaving the port of Dairen besides observing the rules relating to the Laotiehshan Channel, must keep their course within the area from Encounter Rock (38° 34.2′ N., 121° 38.12′ E.) to the South outer joining line of Laotiehshan prohibited area and the North Encounter Rock to the East of meridian line of continent. Failing which, vessels to be held fully responsible for all consequences.

With exception of Laotiehshan and Changshan Channel of Pohai Gulf, no vessel is allowed to pass through any channel of Miaotao group islands.

Harbour regulations required to be observed by merchant vessels calling at Dairen Port.

When entering or leaving Dairen Harbour vessels must pass through channel between Daisansantao and Kwangpotsue. Vessels are not allowed to navigate within area 2.5 miles radius from Daisansantao lighthouse, position 38° 51′ 50″ N., 121° 49′ 29″ E. and 1 mile radius from Kwangpotsue lighthouse position 38° 54′ 14″ N., 121° 42′ 54″ E.

After entering joining line between Daisansantao and Kwangpotsue lighthouses, radar, radio transmitter, radio-telephone, radio direction-finder, echo sounder, range-finder, sextant, firearms, flare signals and rockets of all kind are prohibited to be used.

In case danger occurs or vessel has to send any emergency message, the above-mentioned apparatus may be used, but vessels must report to Harbour Superintendency Administration immediately after using.

Vessels must wait for quarantine and Pilot within area as follows: 38° 57′ 00″ N., 121° 41′ 00″ E. – 38° 57′ 00″ N., 121° 46′ 00″ E. – 38° 56′ 18″ N., 121° 41′ 00″ E. – 38° 55′ 00″ N., 121° 46′ 00″ E. In case this area is occupied, surrounding area may be used.

DOCUMENTS:

First Port	*Subsequent Ports*
2 Maritime Declaration of Health.	0
2 Reports of Entry for foreign ships.	2
6 Crew Lists.	5
2 List of Specified Articles.	0
1 Report of Articles restricted for use in port.	1
4 Passenger Lists (if any).	0
1 Ship's Particulars for Identification.	1
2 Cargo Manifests.	1

The List of Specified Articles (money, gold and silver, but not cigarettes and spirits) is taken from port to port. All forms to be Chinese.

GENERAL INFORMATION: On Dairen (Ta-lien) – B.A. Chart No. 3694:

In the fairway the turning basin and along Pier No. 4 East-side, at least 38 ft. of water. Length of the pier about 1,500 ft. Several berths for vessels up to 34 ft.

It was not possible to obtain information on the cranes, and they were not marked with SWL, so the following figures are only estimated:

Pier No. 1 W.-side =4 cranes about 5 tons.
Pier No. 2 E.-side =3 cranes about 3 tons.
Pier No. 2 W.-side =4 cranes about 4 tons.
2 cranes about 10 tons.
Pier No. 3 E.-side =2 cranes about 3 tons.
Pier No. 3 W.-side =4 cranes about 2 tons.
6 cranes about 10 tons.
Pier No. 4 E.-side =6 cranes about 6 tons.
Pier No. 4 W.-side =3 cranes about 6 tons.
One floating crane with 100 tons capacity.

About 8 tugs, 600–1,000 h.p. tugs are also used as Pilot boat and to bring information and boarding party out to vessels at the anchorage.

One fresh water barge.

Three oil-barges, about 150, 500 and 800 tons.

Medium size shipyard, building vessels up to about 25,000 tons.

HSINGKANG

SHIPMASTER'S REPORT. (1974.)

B.A. Chart 2653. China Sea Pilot No. 32, Vol. 111.

NAVIGATION: The lighthouse in position 38° 55′ N., 117° 59.5′ E. was visible at a distance of 10 miles, flashing every 10 secs., and is surrounded by 4 units buoys at a distance of about 180 m. from the tower. The Fairway to berth installations is being dredged, but presently appears to permit a draft of only 25 ft. LW with a draft of 27 ft. it was necessary to await HW before sailing.

PILOTAGE: Pilot and Port Authority Agent board at the anchorage. Pilot boat is large tug which may also be used as an ice-breaker, and has black hull with white superstructure. Pilots are careful and efficient, and speak some English. No VHF or HF radio facilities are available to the Pilot.

MAX. SIZE: See "Navigation". All berths are suitable for vessels of up to 9 m. draft.

TUGS: Six large tugs, and three smaller tugs.

BERTHING: The harbour is under considerable development, and at present has availability for about 15 or more vessels. All berths have rail connections and are approachable by trucks. There are no sheds at the berths and refrigerated stores are only available at Tientsien to where they transported by train, lighters or trucks. Berths are equipped with rubber fendering, suitable for all requirements.

CARGO GEAR: There are some cranes available and in operation with a lifting capacity of about 10 tons. There are also about three floating cranes with capacities of up to about 80 tons. Where no cranes are available, vessels are required to load and discharge with ship's gear.

FRESH WATER: Connections at some points have still to be made, but otherwise fresh water is available at all berths. Due to the very long waiting time for berthing and the lack of some of the connecting points, it is advisable to arrive with full F.W. tanks.

PROVISIONS: It is essential to check all provisions when delivered since they may be of poor quality. Rejected goods are accepted back without problems.

SHANGHAI

SHIPMASTER'S REPORT. (1974.)

B.A. Chart 1602. China Sea Pilot No. 32, Vol. 111.

Navigation: Marine flashing light Yangtse North – the position quoted in the Nautical Light Service 11 agrees with Pilot's information. Marine flashing light North Saddle – very weak, signals KK. Marine flashing light Gutzlaff island – out of service.

The wreck shown on the chart between the entrance of the Wangpoo into the Yangtse Kiang and buoy 51 (new numbering) has been removed.

On the Yangtse Kiang there has been considerable dredging, particularly between buoys 54 and 51–3 (new numbering) in order to clear the Bar. According to the Pilot, until the present time, only vessels with less than 25 ft. draft could pass at slack water.

Following the Pilot's disembarkation, vessels proceeding Northbound should make an Easterly course to 31° 05′ N., 122° 31′ E. and then alter course Northerly, Chi-ku Chiao Lt. (Amherst Rocks) should be passed at a distance of about 6-8 miles.

Buoy No. 51-0 (Entrance) is in position at 31° 04.9′ N., 122° 10′ E. Same signal. Buoy No. 51 (Fairway) is in position at 31° 03.8′ N., 122° 14′ E. Same signal. Buoy at 31° 12.8′ N., 122° 19.1′ E. Non-existent. Buoy at 31° 07′ N., 122° 22.5′ E. Flashing green every 3 seconds. Buoy Nos. 54 (now 51-2), 57 (now 51-3), 58 (now 53), and 61 (now 54) are in process of positional alterations. Characteristics are not as on chart. Shaweishan Lt. Gp.Fl. (2 and 1) 12 seconds was observed. Numbering of the buoys on the Yangtse is now changed, and the numbers given on the chart no longer apply. The buoys are spread-out in accordance with the depth of the river. Lt. Vs. No. 60 (old number) now carries the words Jui Dan, and is in approximately the same position. Lt. Vs. Ch'ang Chiang K'ou was replaced end-1974 for repairs, by a buoy with Radar reflector.

Documents: Clearance takes place quickly. On arrival the following documents are required:

6 Crew Lists.
Health Clearance Certificate.
List of Effects.
Declaration of Navigational Equipment. Make, type and quantity of Sextants, Binoculars, Radio Station Equipment and Emergency Signal, must be quoted.

If no pre-printed Chinese Forms are on board, the Authorities will accept the vessel's own forms, and will themselves carry out the transfer of information to their own documents.

When proceeding to another port within the People's Republic of China, only the Seamen's Books, Landing Permit and Seamen's Club Purchasing Cards are required. The Authorities will still require a list of Chinese currency remaining on board but only wish to know the total sum and not the amounts held by individual Crew members.

Pilotage: Pilots are requested via Shanghai Coastal Radio. Installation of a VHF service is planned within the next three years, but at present the pilot boat is not fitted with VHF, and no radio service is available for pilotage. Installation of Port Radar Service is planned within the next five years, but is presently not available.

Shanghai Harbour Control is equipped with VHF, and Pilots communicate with Harbour Control on Channel 10 concerning ship's movements. Traffic is passed in the Chinese language only and may be operated by the Pilot. A total of up to five Pilots board the vessel together with the Agent of the Harbour Authority. The Pilot boarding position is approximately 31° 05′ N., 122° 01′ E. The main pilot craft is usually at anchor in that position, and the Pilots board from small launches. The main pilot craft corresponds closely to those used in Germany and the Netherlands, and has white superstructure and a white hull. Pilots are available day and night. Pilots are efficient, speak some English, and control the vessel most carefully. After the Pilot's boarding, no further use may be made of the vessel's own charts, and the Pilot brings his own charts with him.

Anchorage: The main quarantine and inward clearance zone is now on the Yangtse in the area of 31° 04′ N., 121° 06′ E. (See 1978 Report below) and is of sufficient area to accommodate about 15 deep-sea vessels. The anchorage is good with sufficient depth for loaded vessels. The two quarantine areas shown on B.A. Chart 1602 (October 1974) have been abolished, and a new zone has been established due East of the Lt. Vs. Ch'ang Chiang K'ou, with middle point 10 miles due East of the Lt. Vs. extending about 5 miles by 5 miles.

A Notice to Mariners issued by the Shanghai branch of the China Ocean Shipping Agency, and dated December, 1974, reads as follows: "As Woosung Quarantine Anchorage is effected by the current of Changkiang, vessels anchored there are apt to drag anchor if no proper safety measures have been taken or there is negligence in keeping watch, thus resulting in grounding or collision with other vessels. To ensure safety of vessels at anchor, we hereby draw your attention to the following:

(1) Vessels waiting for berth or for other reasons drop anchor at Quarantine Anchorage, someone must be appointed to keep watch of the anchor.

(2) To have no less than 6 (six) shackles of anchor chain in the water.

(3) On the following occasions, watch should be re-inforced and, at the same time, have the engine ready against accidents:
  (a) Bad weather.
  (b) Wind force 6 and upwards.
  (c) Foggy and misty weather.
  (d) Stormy weather.
  (e) Spring tide.

(4) If a vessel is dragging anchor or any accident has happened to a vessel anchored at anchorage, the Captain of the vessel should report to this Agency *immediately*, enabling this Agency to make arrangement for sending Pilot on board or take other effective measures.

Restrictions: Permission to swing-out lifeboats must be obtained in writing from the Port Authority, through the Agent. If the request is made 24 hours in advance stating that the vessel's own country's laws require it to be done, then permission is given the same day, for the operation to be carried out the following day. Lifeboat engine trials are not permitted in view of the very intensive traffic on the Wangpoo, and the very strong current. No filming is permitted in the port area, but is permitted in the town with the exception of military installations. Electronic navigational equipment, navigational aids, echo-sounding equipment and radio may not be used except with the Pilot's permission during the approach to port.

Mooring: Mooring to buoys takes place with assistance of tug and mooring craft. Pilots manoeuvre vessel to forward buoy with use of the anchor which remains paid-out after tying up, and is only raised prior to sailing. Approximately one to one-and-a-half shackles used. Vessel is moored to buoys with four lines fore and aft, and slip-wires. Lines are paid-out in equal lengths either side through the mooring leads and not through the Panama hawse.

Tugs: When proceeding from buoys to alongside berth, tugs provide assistance in un-mooring, but not in berthing which is conducted by Pilot without tug assistance. When leaving the berth, tugs are used to assist, and use their own lines.

Berthing: Pier installations are partly damaged and have no fendering. If possible, vessels should have their own cork or wooden fenders.

Cargo Gear: Loading and discharging is by means of ship's gear. There are three heavy-lift floating cranes with lifting capacities of about 130 tons, and of modern construction. A number of mobile cranes are available with lifting capacities of about up to 5 tons.

Currency: For vessels tied to buoys there is an hourly boat-service to the Seaman's Club where foreign currencies may be changed into Chinese Yen, and where purchases may be made.

Provisions: Stores, alcohol and cigarettes are not sealed. Fresh provisions are available depending upon time of year. Sufficient quantities are available including beer, poultry, meat and fish. Ample advance notice is required.

Telephones: Telephone calls to foreign countries are possible either from the Agency or from the main Post Office in Nanking Road.

SHIPMASTER'S REPORT: 1978.

Anchorage: The anchorage, prescribed by the Agents to await the tide is the Chang Kiang Kou Anchorage, as shown on B.A. Charts 1602 and 1199, between the following positions:

A – 31° 00′ N. 122° 25′ E.
B – 31° 00′ N. 122° 32′ E.
C – 30° 56′ N. 122° 32′ E.
D – 30° 56′ N. 122° 25′ E.

Pilotage: The Pilot station is as charted on B.A. Chart 1602 in position 31° 03.5′ N., 122° 12′ E.

The Pilot boat is equipped with VHF (Channel 16). They do reply to calls in the English language, but they have no authority to give any information concerning dates and times of proceeding up-river. (Those orders come by radio from PENAVICO). The Pilot station however gives instructions by VHF to ships approaching the Pilot station to pick up the Pilot, concerning speed, which side the Pilot ladder, etc.

VHF in Port: For the VHF communication in port please see "Circulars".

Shipmaster's Report above dated 1974: The information concerning Navigation, Pilotage, Documents, etc., dated 1974 is still correct and up to date, except for the anchorage area 31° 04′ N., 121° 06′ E., which we cannot place.

Quarantine Anchorage and Waiting Area: Ships are boarded and cleared at Woosung Quarantine Anchorage. It is also there that ships await berthing orders. About 15 deep-sea vessels can be accommodated at Woosung.

CIRCULARS:

China Ocean Shipping Agency Shanghai Branch
CIRCULAR
June 1, 1977

The VHF radiotelephone of China Ocean Shipping Agency Shanghai Branch is, from this day, open to foreign vessels calling at the port of Shanghai:

Channel: 11. (If Channel 11 is not available on board, the vessel may make contact with the Shanghai Harbour Radiotelephone Station (Channel 16) and then communicate with Penavico on the Channel appointed by that Station).

Call Sign: PENAVICO.

Working Hours: 0000–2400 hrs., continuous service day and night. (All ships anchored at Woosung Quarantine Anchorage and in its vicinity or moored at buoys – those berthed alongside wharves excluded – are requested to have their VHF radiotelephone station opened every day at the undermentioned times:

1115–1130, 1515–1530, 1915–1930 hrs.

in order to keep watch and receive any message such as berthing information, which Penavico may transmit to them. The ships which are not called in the above period of time may then close down their station. Ships which intend to communicate with us may call Penavico at any other time).

When using VHF radiotelephone, foreign vessels should observe "Provisional Regulations Governing the Use of VHF Radiotelephone by Foreign Vessels" issued by the Ministry of Communications of the People's Republic of China.

CHINA OCEAN SHIPPING AGENCY
SHANGHAI BRANCH

GUIDE TO FOREIGN VESSELS CALLING AT SHANGHAI
October, 1978

1. Regular Channel in Chusan Area:

Foreign vessels may navigate in the regular channel between the Chusan and Raffles Islands which is open to navigation, but are not allowed to navigate in other channels between these islands. (By the regular channel is meant the channel from Tongting Island, Steep Island, Elgar Island, Bonham Island, Button Island, Gutzlaff Island to Chang Kiang Kou).

2. *Dangerous Area:*

All vessels are to note and keep away from the dangerous area bounded by lines joining the following four points:

30° 47′ 05″ N. 123° 03′ 00″ E.
30° 47′ 15″ N. 123° 05′ 54″ E.
30° 44′ 45″ N. 123° 03′ 00″ E.
30° 44′ 45″ N. 123° 05′ 54″ E.
see Chart No. 1199

3. (a) *The Chang Kiang Kou Light Vessel:*
Location: 31° 03′ 32″ N. 122° 23′ 26″ E.
Characteristic – flashing every 6 secs.

(b) *Pilot Boat:*
Location: 31° 03′ 30″ N. 122° 12′ 00″ E.

(c) *The names, positions and light characteristics of the light buoys between Chang Kiang Kou light vessel and the Pilot boat:*

(i) Light buoy "M-1" 31° 03′ 00″ N. 122° 18′ 42″ E., flash every 6 secs.
(0.3+1+0.3+1+0.3+3.1)

(ii) The red and white chequers canshaped light buoys have been set up at the following positions:
H12. 31° 03′ 45″ N. 122° 14′ 28″ E. flash red 2 every 3 secs.
(0.3+0.3+0.3+2.1)
H14. 31° 04′ 11″ N. 122° 12′ 11″ E. flash red 2 every 1.5 secs.
(0.15+0.3+0.15+0.9)
H16. 31° 04′ 37″ N. 122° 09′ 54″ E. flash red 2 every 3 secs.
(0.3+0.3+0.3+2.1)
H18. 31° 05′ 03″ N. 122° 07′ 39″ E. flash red 2 every 3 secs.
(0.3+0.3+0.9+1.5)

(iii) The black and white chequered canshaped light buoys have been set up at the following positions:
H11. 31° 03′ 49″ N. 122° 15′ 03″ E. flash 2 every 3 secs.
(0.3+0.3+0.3+2.1)
H13. 31° 04′ 15″ N. 122° 12′ 47″ E. flash 2 every 1.5 secs.
(0.15+0.3+0.15+0.9)
H15. 31° 04′ 41″ N. 122° 10′ 30″ E. flash 2 every 3 secs.
(0.3+0.3+0.3+2.1)
H17. 31° 05′ 07″ N. 122° 08′ 14″ E. flash 2 every 3 secs.
(0.3+0.3+0.9+1.5)

4. (a) With the line joining Chang Kiang Kou light vessel and light buoy M-1 as a demarcation line.
(i) Entrance Channel: The water area within 1,100 m. and on the Northern side of the line is the Entrance Channel.
(ii) Departure Channel: The water area within 1,100 m. and on the Southern side of the line is the Departure Channel.

(b) With the line joining light buoys H12, H14, H16 and H18 as a demarcation line, the water area within 1,100 m. and on the Southern side of the line is open to navigation. The water area on the Northern side of the line is prohibited to navigation.

Shipmaster's Note:

Extensive dredging is taking place between the Pilot vessel and Woosung anchorage.

A buoyed channel has been established under the same project and several buoys have been re-positioned and laid above those charted in B.A. Chart 1602. All the buoys have new numbers.

TAKU BAR: 38.56 N. 117.53 E.

ALL INFORMATION IS A SHIPMASTER'S REPORT.

GENERAL: Guide to foreign vessels calling at Taku Bar (Hsinkang, Tangku and Tientsin) issued by the Harbour Master at Tientsin.

1. Foreign vessels entering Pohai Gulf are only allowed to pass through Changshan Channel and/or Laotiehshan Channel. If the latter way is taken, the vessel must send a wireless message to "Harbour Master, Dairen" for directory 8 hours prior to passage. It should be noted that no other Channels are permitted for navigation. (Also see "Dairen").

2. Vessels passing Laotiehshan Channel for Dairen must make a detour along the East of "Encounter Rock".

3. Position of sunken dredger "Se Ho" is at 38° 31′ N., 119° 10.5′ E. Vessels should keep far away from the above-mentioned area during navigation.

4. Position of Taku light vessel is at 38° 56′ 51″ N., 117° 55′ 33″ E. Vessel may anchor N.E. of the light vessel according to different condition of vessels arrival draft, to wait for Pilot.

5. Vessel may send radiogram to "Penavico Hsinkang" (via Hsinkang Coastal Radio Station XSV, calling frequency 500 kc/s., working frequency 445 kc/s., reserve frequency calling 8630 kc/s. Listening 8364 kc/s., working hours 0000/2400), giving exact ETA also fore and aft draft, before entering Pohai Gulf.

6. The pilot station is at Tangku. Any foreign vessels, according to Harbour Regulations are required to have a Chinese Pilot, when entering or leaving the Port of Taku Bar, Hsinkang, Tangku and Tientsin. The Pilot will board the vessel at Taku Bar anchorage after receipt of exact ETA given by the Master.

The Salation light beacon in position 38° 56′ 16″ N., 118° 30′ 38″ E. shows a white flash every 3 seconds and visible at a distance of 13 miles.

Regulations issued by the Harbour Superintendent's Office.

1. All foreign vessels (hereafter referred to as vessels) entering or leaving the port of Tientsin (hereafter referred to as this port) are required to observe strictly the provisions of the Regulations Governing the Entry and Departure of Foreign Vessels into and from Ports of the People's Republic of China (hereafter referred to as Regulations Governing Foreign Vessels) and of the Port Regulations of Tientsin.

2. On arrival at this port, vessels are prohibited to use the articles enumerated in Article VII of the Regulations Governing Foreign Vessels. Should it be necessary to repair any of the articles enumerated in Item 2 of the same article, permission to do so must be obtained beforehand from the Harbour Superintendent's Office.

3. Articles placed under seal shall not be used and the seals shall not be removed without permission. Should any of the paper seals be found falling off, the fact shall be reported to the Harbour Superintendent's Office immediately.

4. Whilst in port, vessels are not allowed to dress ship or hoist flag at half mast without the permission from the Harbour Superintendent's Office.

5. Vessels in port desiring to undertake any of the following work must first apply in writing to the Harbour Superintendent's Office. After permission is obtained the work can then be carried out at the appointed place.

(a) Lifeboat practice;
(b) Overhauling boiler, main engine, steering engine or windlass;
(c) Engaging in welding work or burning anything on board;
(d) Pumping out ballast water regardless of whether the water is contaminated with oil or not.

6. After a vessel's arrival at this port, sounding, survey sketching, photo-taking, fishing and swimming are strictly prohibited.

7. After arrival at this port, vessels are strictly prohibited to dump ballast materials, coal ashes, garbage, rubbish and mud, or to discharge dirty oil or oily bilge water into the harbour. It is also prohibited to wash double bottom oil tanks or oil deep tanks inside the harbour.

8. Vessels in port must provide secure gang ladders or gang planks with rail or manropes for passengers, crew and all workers to embark or disembark. All gangways or gang planks are to be provided with lights at night.

9. Vessels lying alongside the pier should properly cover up all their exhaust valves and discharge openings on the ship's side facing the pier.

10. Garbage bins or drums with tight covers must be provided on board. The bins or drums should not be filled to overflow. When the garbage-collecting cart comes daily to the ship to collect the garbage and rings the bell on its arrival, the ship should arrange to deliver the ship's garbage into the cart.

11. If, owing to some special reasons, a vessel desires to return to this port after departure, the Master should first telegraph to the Harbour Superintendent for permission and must act according to the instructions given.

Frontier Inspection Station

1. All the officers and crew of a foreign vessel and the passengers on board should produce their passports or other certificates to the Frontier Inspection Station and submit to the inspection of the Station.

2. When the ship's crew or passengers in transit desire to go ashore, the Master is to apply to the Frontier Inspection Station and the passport endorsing authorities, respectively, for landing permits.

3. A landing permit is valid only at the port where it is issued. On the ship's departure, all landing permits for the crew should be returned to the Frontier Inspection Station for cancellation.

4. The time limit for going ashore is from sunrise to midnight. When any Crew member wishes to stay overnight on shore, the Master should apply for permission on his behalf. Staying overnight ashore without permission is not allowed.

5. All laws and regulations of the People's Republic of China must be observed.

Customs

1. It is forbidden to carry the national currency of the People's Republic of China into or out of the country. Violation of this rule will render the money in question liable to confiscation.

2. The Master or crew desiring to exchange foreign currencies, gold or silver for Chinese currency should so declare to the Customs and, after the exchange, produce the bank's Exchange Slip for inspection.

3. The Master or crew desiring to carry articles ashore or aboard should report to the Customs for permission and the articles concerned are subject to Customs inspection. Sale of articles taken ashore is prohibited.

4. Exposed films or plates should be developed and submitted to the Customs for inspection before they are allowed to be carried into or out of the country.

5. Places sealed up by the Customs are not to be opened without Customs permission.

Quarantine Office

1. During a vessel's stay in port, if any person on board is found to be in high fever or to be feverish continuously for several days (or with the swelling of the lymphatic gland), or to suffer from acute rash on the skin with or without fever, or to suffer from acute diarrhoea and in a state of collapse, or to suffer from jaundice with fever, the matter should first be reported to the Quarantine Office. The patient can go ashore for medical treatment only when he has been examined and allowed to do so by the quarantine officer.

2. Effective rat-guards or other rat-preventing devices should be fixed on all mooring ropes.

3. Gangways and gangplanks are not allowed to be put on to the

wharf when not required. Should they be used at night, strong electric lights should be provided.

4. Should any dead rats or mice be found or any rats or mice caught on board a vessel, the fact should be reported to the Quarantine Office for the necessary inspection to be made.

The above regulations are in force at most Chinese ports.

In the fairway and on the West side of the first pier vessels may pass on 34 ft. draft. Length of pier about 1,500 ft.

Another pier is under construction, and when ready will have berths for five vessels of about 600 ft. length. The depth alongside will be 34 ft.

On the first pier 7 cranes with a capacity of about 10 tons. It was not possible to obtain information on the older berths. Four tugs with up to 1,000 h.p.

All bunkers to be brought in from Dairen.

TSINGTAO: 36.03 N. 120.20 E.

SHIPMASTER'S REPORT:

Approaches: 1. Approaching from the S.W. on the authorised route in clear water, the following observations were made.

(a) Cape Yatall Lt. Range 20 n.m., not sighted at 10 n.m.
(b) Tai Kungtan Lt. Range 15 n.m., not sighted at 15 n.m.
(c) Ynui Shan Lt. Range 14 n.m., sighted at 15 n.m.
(d) Outer Harbour Fairway Buoy, sighted at 4 n.m.

2. When abeam of Tai Kungtan orders were received to proceed to inner quarantine anchorage.

3. All Inner Harbour buoy lights characteristics did not agree with the recent chart.

Documents: Port Officials board by tug using the gangway. The following papers are required.

4 copies of the Ship's particulars.
4 copies of the Crew List.
2 copies of the Crew Manifest with all foreign currency duly noted.
1 copy of the Health Declaration.
All Identity Cards and Smallpox Certificate.
2 copies of the letter requesting a hold survey.
9 copies of the Notice of Readiness.
Usual ship's papers, including Deck and Engineroom Logs.
Delays caused by:
(a) Crew members not holding I.D. Cards.
(b) Alterations/illegible Smallpox Certificate.
(c) Insufficient copies of the necessary papers supplied at Hong Kong.

Muster: After the above had been inspected, all officers and ratings were required to muster in the saloon. A search of all spaces was then carried out. Each person was required to be compared with his I.D. card, those not possessing one were eventually cleared on discharge books. The Authorities will not recognise passports held by Spanish Nationals.

Detailed Information: Required with regard to the ports at which stores and water have been obtained and a list of the ports visited in the previous six months.

Currency: Available in the form of Chinese Yen.

Cargo: (a) Delivery alongside is very poor. *(b)* Condition of cargo received on board is good. Temperatures of hard frozen cargo are well down. *(c)* Damaged cartons are replaced. *(d)* Stowage, good.

Outwards Clearance: (a) After all B/Ls have been signed and five copies of the vacant space/space used handed over. *(b)* Muster of all persons takes place in the saloon. *(c)* I.D. cards produced and shore passes handed in. *(d)* Vessels searched. *(e)* All foreign currency spent ashore has to be accounted for. Totals of money drawn and returned to Agent produced to the Customs.

Departure: Vessel leaves the berth and anchors at the Inner Quarantine Anchorage. Guards and Port Officials leave after "Clearance" papers have been handed over. Pilot leaves, vessel proceeds without the aid of a Pilot along the authorised route.

SHIPMASTER'S REPORT: 1977.

Pilot: A total of four Pilots board together with Inspection Team from a tug (black hull, white superstructure) at the Pilot station. Pilots usually handle vessels very carefully and speak little English.

Piers: The bulk handling piers are equipped with shore cranes (their capacity unknown) but are poorly fendered.

Tugs: A large number of modern (and likely powerful) tugs were noted, ships lines always used.

VHF: The Port is equipped with VHF (most likely at Harbour Master's Office) and the ship's set is handled by the Pilots. After berthing it is prohibited to use it.

Tide: The rise of the tide is considerable (no figures available) and all piers seem to be well protected by any wind.

Ice: Melting ice was noted on approaching the piers (mid January 1977).

Traffic: Heavy traffic was noted there both in ocean-going and medium-sized tonnage.

SHIPMASTER'S REPORT: 1978.

THE GOVERNING REGULATIONS FOR VESSELS SAILING IN TO OR OUT OF TSINGTAO.

1. Vessel sailing in or out must take definite route stipulated as follows:

From 35° 56′ 24″ N., 121° 05′ 00″ E. to 35° 56′ 24″ N., 120° 46′ 42″ E. course 270° (090°) or
from 35° 43′ 15″ N., 120° 53′ 09″ E. to 35° 56′ 24″ N., 120° 46′ 42″ E. course 338° (158°)
Thence from 35° 56′ 24″ N., 120° 46′ 42″ E. course 283° (103°) to 36° 02′ 00″ N., 120° 15′ 56″ E. then alter course 000° (180°) proceed to quarantine anchorage within following four points:
36° 05′ 18″ N., 120° 15′ 34″ E. 36° 05′ 18″ N., 120° 16′ 50″ E.
36° 04′ 00″ N., 120° 16′ 22″ E. 36° 04′ 00″ N., 120° 15′ 20″ E.

2. Pilot station is within the area: with the point 36° 02′ 00″ N., 120° 18′ 16″ E. as its centre and 3 cables length as its radius.

3. Dropping and dragging anchor is strictly prohibited within the following areas:

1. The 1st prohibited area is within the following four points:
36° 04′ 00″ N., 120° 14′ 00″ E. 36° 03′ 12″ N., 120° 17′ 00″ E.
36° 03′ 27″ N., 120° 14′ 00″ E. 36° 02′ 40″ N., 120° 16′ 56″ E.
2. The 2nd prohibited area is within the following four points:
36° 02′ 42″ N., 120° 20′ 00″ E. 36° 00′ 48″ N., 120° 18′ 00″ E.
36° 03′ 36″ N., 120° 23′ 16″ E. 35° 59′ 48″ N., 120° 18′ 30″ E.

4. Vessel must advise ETA Chalientao 24 hours before ship's arrival.

5. When abeam Chalientao on ship's entry. Master should cable again immediately time abeam Chalientao and accurate time arriving Pilot station, awaiting authorities instructions attentively.

6. Proceeding on abovementioned route following stipulations should be complied with:

1. Ship's national flag and code flags should be flown in daytime.
2. Dumping rubbish and pumping out oil and oily substance are prohibited.
3. If by some reasons, vessel needs to anchor, Master should report to Harbour authorities first for permission.

7. Within the Harbour limit, the prohibited articles should not be used. In case radar required for navigation, Master should report to Harbour Authorities before using it.

8. Abovementioned regulations should be strictly complied with. Otherwise, the vessel is held responsible for all the consequences arising from the violation of the above.

MASTER'S OBSERVATIONS: Approaching from South:

1. From a point W.N.W. about 5 miles from Chalientao L/H until Tsingtao a very strong set was experienced, on ebb tide, position must be checked very frequently and strong counteracting set should be applied. Deep draft vessels should take care particularly near Swallow Bank.

2. Speed was reduced when crossing 9 fm. patch (extending about 1.7 miles long across) in approximate position 35° 59.5′ N., 120° 27′ E. (vessel's draft 9.95 m.).

3. It is not possible to take a course of 283° as per direction as this leads almost on the edge of Swallow Bank and edge of Pile Point. Therefore a slight change was made, from position Chalientao L/H W.N.W. ×5 miles, 284° was steered till 35° 59.7′ N., 120° 26′ E., thence course was altered to 287°. This course keeps vessel well clear of Swallow Bank and Pile Point.

4. the vessel can expect a cable (after cabling ETA Pilot station when abeam Chalientao) giving directions, and usually the Port advises the vessel to anchor within 3 cables of Pilot station, where Pilot boards later and takes the vessel to inner anchorage.

5. All the necessary lights and buoys were found working at satisfactory range and in position.

6. A slight delay can be experienced if vessel does not have inward clearance forms in Chinese prints. In this regard it is advisable to put 2/3 people on the job to facilitate quick completion of formalities (if Chinese forms are supplied by the Immigration Authorities).

7. Vessel berthed at No. 2 Mole Centre pier at high tide on a draft of 9.95 m. It was found that vessel had difficulty in getting alongside and finally secured some 3 ft. off wharf fenders. This was probably due to there being less depth. By Master's reckoning and observations, perhaps 27/28 ft. would be maximum safe depth at low tide at this pier. Vessel was shifted to after pier during the fall of tide, and on this berth by observations about 30.5 ft. would be safety draft at low tide.

8. Fresh water can be supplied without problem. Provisions are in short supply. Laundry can be done, about 3 days notice required. Medical facilities are good. Seamen's club caters to seamen's shopping and tastes. Repatriation is possible arranged by train to Peking and thence by air. Cable facilities exist but there is no telex system.

NOTES

Please also advise Shipping Guides Ltd.

CHRISTMAS ISLAND, Indian Ocean: 10.25 S. 105.43 E.

PORT LIMITS: The area of sea in and adjacent to Flying Fish Cove in the Territory of Christmas Island enclosed by a line commencing at a point where a line bearing 270° True from the flagstaff at Government House intersects the coastline of Christmas Island at MHW thence bearing 270° True for a distance of 2 km. thence bearing 360° True for a distance of 2 km. thence S.E. by a straight line to Rocky Point thence generally S.W. along the coastline of Christmas Island at MHW to the point of commencement.

DOCUMENTS:

Port Clearance.

2 Crew Lists.

2 Passenger Lists.

2 Manifests.

Health Certificate.

PILOTAGE: Pilot boards 1 mile West of Smith Point.

ANCHORAGES: Nil.

RESTRICTIONS: Daylight entry only.

MAX. SIZE: Length 630 ft., breadth 90 ft., draft 35 ft.

HEALTH: Radio Pratique granted whenever possible. Information required: date of departure, last port of call, number of persons aboard, number of passengers disembarking, state of health. Contact port health before arrival in event of suspected disease. No automatic pratique.

RADIO: All cables to Christmas Island Radio, VIY.

VHF: Channel 16, 156.8 m/cs., range 35 to 45 miles. Harbour Master may also be contacted on 2182 or 2201 kc/s. by arrangement through VIY.

TUGS: None.

BERTHING: Berthing daylight hours only. In most cases port anchor to be disconnected from cable prior to arrival; mooring gangs provided.

BULK CARGO HANDLING: The bulk loading berth is served by two cantilevers each capable of delivering rock phosphate at an average rate of 1,500 t.p.h. Bottom of telescopic chutes when fully raised are 50 ft. above sea level at high water springs.

STEVEDORES: Supplied by Agents.

MEDICAL: No notice required for medical attention. Hospital facilities available throughout 24 hours. Inoculations required: smallpox, yellow fever (from endemic areas), cholera (from S.E. Asian ports). International Vaccination Certificates required.

TANKERS: Furnace and diesel oils pumped ashore simultaneously through floating pipe-lines, 8 in. and 6 in. diameter respectively.

DENSITY: 1025 constant.

FRESH WATER: Very limited quantities supplied, only in emergency.

FUEL: Very limited quantities supplied, only in emergency.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: All beams and hatches to be handled by ship's crew.

CERTIFICATES: Register of Cargo Gear and associated Test Certificates.

CARGO GEAR: To comply with requirements of the Australian Navigation Act, 1912–58.

IDENTIFICATION CARDS: Not required.

CONSULS: Administrator's Office performs some consular functions.

REPAIRS: No facilities exist.

REPATRIATION: Possible.

AIRPORT: There are 3 flights a week to Australia and flights to Singapore are presently being negotiated.

TIME: Local time GMT plus 7 hours – constant.

HOLIDAYS: New Year's Day; Australia Day (26th January); Hari Raya Haji; Chinese New Year – two days; Good Friday; Easter Monday; Queen's Birthday; Territory Day (1st October); Hari Raya Puasa; Christmas Day; Boxing Day.

No work performed on New Year's Day, Hari Raya Puasa, Good Friday, 1st day of Chinese New Year and Christmas Day.

POLICE/AMBULANCE/FIRE: Police 90; Ambulance 99; Fire 88.

TELEPHONES: Placed aboard when required by port authorities. No charge.

GENERAL: Ships may be ordered to leave berth at short notice if weather deteriorates.

AUTHORITY: Harbour Master.

NOTES

Please also advise Shipping Guides Ltd.

Colombia

GENERAL:

FREE PRATIQUE: There is no radio pratique. The standard W.H.O. Health Certificate must be used.

PILOTAGE: Pilotage is compulsory for all vessels over 250 n.r.t. The Pilot must be requested by the Agent at least 24 hours in advance.

Berthing preference will be given as follows:

1. Warships.
2. Passenger vessels and Mail Boats on a fixed itinerary.
3. Vessels with livestock and perishable cargoes.
4. Passenger vessels not on a fixed itinerary.
5. Vessels loading cargo for export.
6. Vessels discharging cargo for import.
7. Tankers.
8. Coasters.
9. Vessels carrying explosives.

On sailing all vessels must fly the "P" flag.

Vessels at anchor can be authorised to work to lighters.

All Colombian ports are open 24 hours a day.

STEVEDORES: Are supplied by the Port Authorities although it is often necessary to employ extra labour through the Agent, due to the fact that gangs are seldom complete. At week-ends, gangs required for Monday must be ordered by 1000 hrs. on Saturday. Masters should bear this in mind when sending their ETA.

Cargo in a damaged condition or showing signs of pilferage will not be handled until inspected by a Port official and ships officer, leaving on record the actual condition of the cargo.

Containers are discharged or loaded as all other cargo, though if they are stuffed or unstuffed immediately this must be done with the Port Labour provided.

Opening and closing of hatches, and the rigging of gear, is done by a gang of riggers. The ships crew can do this work, but it is advisable to use Union Labour.

Rain tents are not supplied by the port.

All gear, slings, spreaders, etc., must be supplied by the ship.

Rat guards must be fitted on all mooring lines whilst in port.

PORT SECURITY MEASURES: All ports are rigorously patrolled by Port Police, and Crew members are advised to carry Identification Cards at all times when ashore.

FUMIGATION: This can only be carried out alongside with the permission of the Port Authority.

GARBAGE: No garbage may be thrown overboard. This includes flakes of paint from vessels chipping or scraping the hull. No paint must be allowed to drop into the water or onto the quayside. Overboard discharges must be kept off the quay.

POLLUTION: The standard requirements for the prevention of oil pollution must be adhered to within the continental shelf off the Colombian coast.

All vessels must ensure that the Oil Record Book is up to date prior to arrival, as it is likely to be inspected.

Fines can range from 50,000 to 500,000 Pesos, not including the cost of any clean up operation.

No vessel contaminating the waters of any port may sail until the corresponding fine has been paid.

Oil Tankers are not permitted to clean tanks within 60 miles of the Colombian shores. If a vessel arrives in port with dirty ballast, she will be ordered to proceed to sea beyond the 60 mile limit, and take on clean ballast.

CREW: The authorities will not allow crew to be of unkempt appearance or improperly dressed at any time while the vessel is in port.

FUEL: Bunkers are only supplied to vessels which were supplied in 1972, and are actually trading to Colombia. Vessels may not take more bunkers than the amount they received in that year. Requests for bunkers must be made to Agents at least 1 week in advance.

TIME: Colombia GMT minus 5 hours. Summertime is not observed.

BARRANQUILLA: 10.58 N. 74.47 W. (See Plan Book)

DOCUMENTS:

Clearance from last port.
Ship's Register.
Load line.
Safety radio.
Safety equipment.
Cargo gear.
Oil Pollution Certificate – Policy of Insurance.
6 Crew List.
5 Crew Personal Effects List.
5 Provision List.
5 Store List.
6 Passenger List (in transit).
6 Passenger List (disembarking).
4 Declarations of Passenger baggages.
4 List Port Mail.
1 Sanitation Declaration.
Sets of manifests covering port cargo.

PILOTAGE: Cable Agent 24 hours prior arrival advising ETA. Pilot boarding position Lat. 11° 06′ 50″ N. Long. 74° 52′ W. Radio telephone frequency of pilot station 2738 alternative 2638 or 2182 kc/s. and VHF Channel 16. 2 pilot boats speeds 7–9 knots. Sufficient depth to allow vessels wait for Pilot in boarding position, including trade wind season end November to beginning April.

ANCHORAGE: If awaiting Pilot, anchor 1 or 2 miles West of West breakwater during non-windy season. After Pilot boards and when no berthing space at the quay, anchorage is made in the river, about 1,500 ft. off the dock in approximately 40 ft. of water. Three shackles of chain required in good holding ground.

RESTRICTIONS: Depth at the river bar is being maintained at a min. of 34 ft., however, the actual permissible draft has been curtailed to 30 ft. on account of silting conditions of the river, particularly around the area known as Siape, approximately 4 miles from the dock area.

MAX. SIZE: Recommended max. LOA 600 ft. due necessity for turning vessel before sailing. Also see "Restrictions". Rate of current 2.5 knots during dry season, 4 knots in rainy season.

HEALTH: On arrival port doctor boards vessel to inspect crew Smallpox Vaccination Certificates and Uro Fever Certificates, also Deratisation Certificate. If any crew members suspected suffering contagious disease Master to radio prior arrival advising Agents accordingly. Port doctor visits vessel even if previous port was in Colombia.

RADIO: Messages to and from Agents routed through station HKB. Ship's messages should include call letters.

TUGS: Generally no tugs required for river entrance. Tugs assist berthing and turning vessels before sailing. Two tugs available of 1,200 and 800 h.p. respectively.

BERTHING: Pier length 2,375 ft. Vessels berth starboard side alongside.

CRANES: 50-ton floating crane available.

STEVEDORES: Agents should receive advance copies of stowage plan and adequate notice ETA order arrange gangs.

MEDICAL: All facilities available.

TANKERS: No facilities.

FRESH WATER: Available. Rate about 20 t.p.h.

FUEL: All grades available for delivery by barge.

FIRE PRECAUTIONS: No vessel requirements. Terminal has own fire-extinguishing equipment.

DEVELOPMENTS: Increasing pier size to 1,100 ft. Two more berths under construction.

GANGWAY/DECK WATCHMEN: Request watchmen through Agents.

CUSTOMS ALLOWANCES: No limitations for individual consumption.

IDENTIFICATION CARDS: Supplied by Agents.

CONSULS:

Austria
Belgium
Bolivia
Brazil
Chile
China
Costa Rica
Denmark
Dominican Republic
Ecuador
El Salvador
Finland
France
Germany
Gt. Britain
Greece
Guatemala
Honduras
Italy
Jordan
Mexico
Netherlands
Nicaragua
Norway
Panama
Peru
Portugal
Spain
Sweden
Switzerland
U.S.A.
Venezuela

REPAIRS: Good facilities for mechanical or electrical and radio repairs.

DRYDOCKS: Only one dry dock for very small vessels.

REPATRIATION: Good facilities available.

AIRPORT: 6 kms. from city. Airport served by major airlines.

TIME: GMT – 5 hrs.

HOLIDAYS: 1st January, 6th January, 8th April, 9th April, 1st May, 23rd May, 2nd June, 29th June, 20th July, 7th August, 15th August, 12th October, 1st November, 11th November, 8th December, 25th December. Working hours 0800–1200, second shift 1800–0200. No work on Sunday.

POLICE/FIRE/AMBULANCE: Fire 411828, ext 38. Ambulance 410736 or 319594. Police 411937.

TELEPHONES: Arrangements available for placing telephones on board.

SPECIAL RECOMMENDATION: Masters to warn crew to close and lock cabins.

REGULATIONS: No special facilities for discharging explosives. If explosives on board vessel not allowed berth.

AUTHORITY: Direccion General Maritime Y Portuaria – Capitania De Puerto de Barranquilla.

BUENAVENTURA: 03.53 N. 77.05 W.

DOCUMENTS: On vessel's arrival, Master must present following documents to Port Captain's Office:

Travel Memorandum.
Sole document or Consular despatch from the last port or ports where vessel disembarked or embarked passengers.
3 Crew Lists.
3 Provision Lists.
3 Lists Crew's Personal Effects.
3 Lists Passengers in transit (or negative).
3 Lists disembarking Passengers (or negative).
3 Lists port mail (or negative).
1 Sobordo or Manifest of cargo for the port.
2 Declarations of Passenger baggage, if any.

Destined to Maritime Terminal:

3 Sets Sobordos or Manifests covering port cargo (or negative).
1 Set of Bills of Lading, covering discharge cargo.
20 Tally Books for discharge cargo.

Destined to the Custom House:
3 Sets of Sobordos or Manifests for cargo destined to the port.
1 Set of Bill of Lading for port of destination.
1 Tally Book for cargo to be discharged in port.
2 Declaration Lists for Passenger baggage, if disembarking.

Destined to the Health Doctor:
Vessel's Travel Memorandum.
International Health Certificate.
1 Crew List.
List of Passengers in transit (or negative).
1 Vessel's Fumigation Certificate (for presentation only).
1 Port Passengers List (or negative).
Certificate of Exemption of Deratisation (for presentation only).

Destined to Immigration Authorities:
1 Crew List.
1 List of Transit Passengers (or negative).
1 List of Port Passengers (or negative).

Destined to Agents:
1 Travel Memorandum as above mentioned.
9 Crew Lists for Consular despatch and handling of sailing permit.
6 Lists of Passengers in transit (or negative), for Consular despatch.
6 Lists of personal effects for Consular despatch.
2 Mail Lists for the port (or negative).
3 Sets of Sobordos or Manifests covering port discharge cargo (or negative).
4 Sets of Bills of Lading covering port discharge cargo.
10 Tally Books covering discharge cargo.
2 Lists of Passenger baggage declaration for the port, if any baggage.

PILOTAGE:

(a) Entry marked by Channel having minimum depth of 3.25 fathoms low tide. Advisable enter Channel or leave wharf 1 hour after low tide and 2 hours after high tide, restricting departure during any other periods, particularly when draft exceeding 20 ft. Entry to Channel marked by Buoy No. 1 located at Lat. 3° 47′ 10″ N., Long. 77° 19′ 10″ W.

(b) 24 or 20 hours before reaching port, Master must cable separately to Agents, to Port Captain and to port doctor confirming hour of arrival Punta Bazan (Pilot station). Message to Agency must indicate, in addition to ETA, quantity of cargo destined for the port, number of disembarking or in-transit passengers, number of gangs required for operations, draft, mail for the port, if fresh or running water is required; fuel-oil, cash to Master or any other special requirement; whether special side of wharf is required for berthing, and whether dangerous cargo (explosive) or inflammable cargo, and what quantity. Message to port Captain must also indicate arrival time, quantity of cargo destined to the port, number of disembarking or in trnct passengers, mail, whether dangerous or inflammable cargo is brought and in what quantity, and any other data that may be considered useful in accordance with International regulations. Message to doctor must indicate arrival time, number of disembarking or in-transit passengers, and whether there are sick persons on board.

(c) Radio beacon at Punta Soldado, characteristics: Frequency, 317 kc/s. Letters, B.T. Time 0000 – 2400 hrs. every day and every 10 minutes with 20 of rest during 30 minutes work. Flashes 12 seconds duration.

(d) Radio-telephone in Pilot station of Punta Basan (opposite to Punta Soldado), characteristics: VHF Channels 11 and 16 every day from 0600 – 2400 hrs.

(e) Since Master's advice to Agency serves as notification to Pilot station, Pilot will be at Punta Bazan ready for vessel. In case of delay due to any circumstance, vessel may anchor and request Pilot by 4 short blasts.

(f) Port has 9 Pilots.

(g) Pilot ladder must be lowered a few feet from the surface. Vessel must proceed slowly in order facilitate boarding.

(h) Pilotage compulsory.

ANCHORAGE: Marked by Buoy No. 7, located Lat. 03° 53′ 59″ N., Long. 77° 04′ 04″ W.; depth from 33 to 70 ft. and distance from wharves approximately 1,000 yards.

RESTRICTIONS: Max. draft for crossing bar is 28 ft. one hour before/after high water. Bar is located in position 03.48 N., 77.19 W.

MAX. SIZE: No restrictions on the length of vessel, depth alongside wharf approximately 12-31 ft. low tide.

HEALTH:

(a) As soon as vessel anchored by Pilot within bay, port authorities including doctor, will board by means of ladder which must be lowered when port area entered.

(b) In case of sickness on board, Master must advise in order doctor may determine whether vessel will be under quarantine or not. This will apply even if vessel arriving from a port of the same country.

(c) Time-table for meeting vessel: Ordinary or regular time – ordinary time: 0800/1200-1400/1800 hrs.; overtime – 0700/0800-1200/1400-1800/2200 hrs. Sundays and holidays, overtime.

(d) After 2200 hrs. and up to 0700 hrs. of following day it is not possible to make arrangements for meeting vessels, unless in emergency.

RADIO: (Also see "Pilotage"). Port has receiving-transmitting radio station Buenaventura/Colradio HKC. For listening and transmitting there are following frequencies:

Listening	*Transmitting*
8354 to 8374 kc/s.	8574 kc/s.
12531 to 12561 kc/s.	13087.5 kc/s.
6265 to 6280 kc/s.	6386.5 kc/s.

In emergency: Listening: 500 kc/s. Transmitting: 441 kc/s. Station operates 24 hours a day.

TUGS: Normally only required for berthing. Tug operation handled by Pilot. Generally tug service consists of pushing from stern or bow as required. When necessary to use ropes, they must be supplied by vessel. 4 tugs of 1,200 h.p. each, 1 of 350 h.p. and 1 of 60 h.p.

BERTHING: Main wharf 2,126 m. long, divided into two sections, one for import cargo and one for export cargo. Facilities exist for handling container traffic.

Berthing arranged by turn according to time of anchoring in bay for each vessel. Tidal currents exist alongside berths.

Berth	*Length*	*Depth at LW*
Shed No. 1	202 m.	12 ft.
Sheds No. 2–No. 9	—	23–25 ft.
New Pier	80 m.	31 ft.
	597 m.	17–20 ft.

STEVEDORES: (See "Pilotage"). Port has at present time 80 gangs of 16 men each. The working hours during ordinary or regular time are from 0800/1130 and from 1400/1730. Overtime from 1800/2400 and from 0000/0800, and 1200/1400 (24 hours are worked). No work from 2300 hrs. Saturday until 0700 hrs. Monday.

MEDICAL: Agent must be given advance notice of urgent medical attention. Properly equipped hospital. All members of crew and passengers must have International Certificates of vaccination against smallpox.

TANKERS: Independent oil pier with capacity to accommodate vessels of medium size. Four 8 in. hoses for discharge of petroleum products, and two 6 in. hoses for unloading chemicals. Average rate of discharge of gasoline is 5,000 b.p.h. (approx.) Fuel oil and chemicals 1,500 b.p.h.

DENSITY: 1012 (approx.) average.

FRESH WATER: Drinking water unlimited quantity. Delivered through hose from end of wharf. Rate of delivery: 6 t.p.h.

FUEL:

(a) Two kinds of fuel, marine gas oil and bunker "C" fuel. Characteristics of gas oil: gravity 33.0 to 60° F. Specific gravity: 8602. Characteristics of bunker "C" fuel: gravity, 13.2 to 60° F. Specific gravity, 9779.

(b) To take bunkers vessel must berth between warehouse 2 to 9, and for delivery of gas oil between warehouse 1 to 5.

(c) Rate of delivery (approx.), 250 b.p.h. for bunkers and 700 b.p.h. for gas oil.

(d) Deliveries depend on quantity available when order placed, consequently Agent must know well in advance vessel's requirements.

(e) Cash payment according to prevailing prices at time of delivery; otherwise, according to contracts between Shipowner and supplier.

FIRE PRECAUTIONS: Fire station within port installations with proper equipment. In city also another fire station, co-operating if necessary.

DEVELOPMENTS: Improvement in wharf installations, warehouses and equipment and dredging is scheduled to deepen the depth alongside wharf.

WATCHMEN: Service necessary both by Crew members' and Agents' personnel. There is no established body of watchmen; the steamship agencies carry out this work with their own personnel with previous request by Master. The port has a port police body and Custom house guards which co-operate in vessels' watch.

OPENING/CLOSING HATCHES: All Agents have special gangs to handle this operation and to fix the vessel's rig for discharge and/or loading. These personnel permanently stand by on board on account of climatic conditions of port with frequent and sudden rains. No prohibition against crew carrying out such operations when charter parties are involved and which stipulate that such operation must be done by crew. It is known from experience, however, that vessel's personnel are not, on occasions, sufficient to do this work.

CUSTOMS ALLOWANCES: No regulations establishing quantities which each Crew member may have outside bond, but must not be excessive order avoid problems with authorities.

CARGO GEAR: Ship's gear used. Also see "General".

IDENTIFICATION CARDS: Agent will supply special cards to crew and passengers in transit so that they may go ashore. Cards valid for entering and leaving port installations and for identification with the Immigration authorities. Must be returned before vessel departure.

CONSULS:

United States	Tel. 2501	Holland	Tel. 2631
Panama	,, 2250	Bolivia	,, 2589
Ecuador	,, 2690	Mexico	,, 3589
Sweden	,, 3270	Spain	,, 2562

REPAIRS: According to port regulations vessels must at all times be ready with engines to sail, consequently repairs of engines not allowed when ship bertbed at wharf. No prohibition against minor repairs on deck. When engine or deck repairs taking a long time are necessary, vessels not being loaded and/or discharged simultaneously with repairs must go to anchoring ground, since crowding of vessels at port does not permit vessel being inactive occupying space while other vessels are anchored waiting for berth.

REPATRIATION: Authorities render co-operation for change of crew and arrangements of repatriation in co-ordination with ship's Agent.

AIRPORT: Located 18 km. from Buenaventura. Serviced by a regular airline, Aerotaxi, which has several daily flights from Buenaventura to Cali and a daily flight from Buenaventura to Bogota. Small planes which take 40 minutes from Buenaventura to Cali and 1.5 hrs. from Buenaventura to Bogota. Airport is small and has no facilities for international flights. Agent in charge of the repatriation of a Crew member must handle necessary connection in Cali or Bogota, where there are international airports.

TIME: GMT minus 5 hrs. Permanent.

POLICE/AMBULANCE/FIRE: A voluntary firemen corps in the city. Alarm, tel. 2222; Guard, tel. 2223; Firemen of the Maritime Terminal, tel. 2830; Ambulance, tel. 2830; Police, tel. 2738.

GENERAL: Provisions available. Cable service to all parts of the world. Telephone and telex service inside country and to foreign countries through Bogota. Weather conditions: generally rainy. Explosives: if the vessel is transporting dynamite and detonating caps they are placed in separate lighters, and armed guards are required on board any vessel transporting explosives. In such cases, the vessel must anchor in front of Buoy No. 9 and discharge to lighters during daylight. No vessel can berth at the wharf if transporting explosives, and only permitted with dynamite in closed hatches, which will not be opened at the wharf according to government regulations. Port is equipped with following shore cranes: 2×80,000 lb. capacity (mobile), 1×60,000 lb. capacity (mobile), 3×20,000 lb. capacity (mobile), 2×14,000 lb. capacity (mobile), and 4×10,000 capacity (3 mobile and 1 fixed). Floating cranes: 1×45 tons capacity.

Lighters available: 3 with following characteristics:

Size Length/width	Capacity	Type
1-24.40× 9.45 m.	200 tons	Flat surface
2-34.40× 7.60 m.	150 tons	Flat surface
3-38.80×10.60 m.	150 tons	Flat surface

No refrigeration space available.

SHORE LEAVE: Permitted (with ID cards).

DELAYS: At anchorage in Bay average delay of one day while waiting for berth. On account of the rainy condition of the port, discharge or loading is at times stopped up to 12 hrs.

SHIPMASTER'S REPORT No. 1: 1978

Pilotage: Normally the Pilot boards at Punta Bazen but can be arranged at No. 1 buoy at request of Master as most shallow water is from No. 1 buoy to No. 5 buoy.

Anchorage: Vessels are warned not to anchor near No. 1 buoy or at Punta Bazen because of piracy. Pirates steal ships' cargoes at these anchorages.

Buoys: All buoys marked on chart are not dependable (for example the No. 1 buoy has been shifted 070° about one mile).

Berthing: Depth 9 metres at low water, capacity for 12 ocean going vessels.

Stevedores: For general cargo, each gang 6–8 persons. Working hours 0800–1130, 1400–1730, 1800–2300, 0000–0300 hrs.

Watchmen: Policemen engaged on board on arrival as gangway watchmen and hatch watchmen. Vessel to victual those persons.

Caution: Strong tidal current up to 3 knots in this port, vessel must keep strict watch when anchored and when berthed.

Shallower depth may exist due to silting at fairway and at inner side of the pier.

SHIPMASTER'S REPORT No. 2: 1978

Whilst at the port we were boarded by two well organised gangs of thieves. The first incident took place in the Roads, when thieves managed to steal cases of whisky and a Xerox machine from No. 1 L/H before being seen and chased off by the ship's crew. The second incident, which could have had serious consequences, occurred whilst at anchor in the estuary awaiting sufficient water to cross the river bar. Here, an aggressive, well disciplined gang, armed with parangs and staves boarded, and only after a running skirmish with the ship's officers did they retrjt having stolen one box of cargo from No. 2 L/H. A constant two-man deck patrol has been in operation since arriving at Buenaventura, but the only method of deterring these experienced thieves is effective hold security.

CARTAGENA (Incl. Mamonal and Ecopetrol):
10.26 N. 75.33 W. **(See Plan Book)**

DOCUMENTS:

Clearance from last Port.
7 Crew lists.
Ships papers and Certificates.
Oil Pollution Certificates.
7 Personal effects lists.
3 Sets of cargo manifests of each port with respective bills of lading.
Tally books of cargo for each port.
Health declaration, Certificate of Vaccination, Deratization Certificate.
7 lists of passenger to disembark (or negative).
7 lists of passengers in transit (or negative).

PILOTAGE: Compulsory. Boarding position, around Lat. 10° 19′ 05″ N., Long. 75° 36′ 10″ W. 2 Pilot boats, black hull, white superstructure. Speed 6 knots. Sound signals, 4 long blasts for all type of vessels. Radio: VHF – standing by on Channels 11 and 16. Also Channels 6 and 26 to shift. Service 24 hours every day. At Central Radio Terminal there is A.M. radio on frequency 2738 and 2638 khz. and VHF.

ANCHORAGE: Anchorage in foul weather or other reasons 0.5 mile S.W. from buoy No. 1. For vessels awaiting berth in Cartagena, South from Punta Castillo Grande. For tankers in Mamonal, West of the pier of Refineria Ecopetrol.

RESTRICTIONS: Entry day or night.

MAX. SIZE: Cartagena: length 600 ft., beam 79 ft., draft 30 ft. (for berthing).

Tankers: length 850 ft., beam 110 ft., draft 38 ft. Tankers anchor and berth in port of Mamonal, within bay, using same approach.

HEALTH: Doctor requires the Crew Lists with data of vaccination against smallpox. International regulations in cases of contagious sickness or epidemic are carried out.

RADIO: Radio Barranquilla – HKB

VHF: Pilot Station, pilot boat, Terminal Superintendent and Agents on Channel 16.

TUGS: Compulsory for all vessels over 2,000 g.r.t. at Cartagena and in Mamonal.

No tugs required for tankers berthing at Mamonal.

BERTHING: Port has two piers: Berth No. 1, outside length 202.60 m., depth 31 ft.; inside length 184.76 m., depth 30 ft.; Berth No. 2, outside length 184.76 m., depth 28 ft.; inside length 184.76 m., depth 28 ft. 24 hours service. Berthing shifts or turns: 1st, Passenger vessels (Tourist). 2nd, Cargo vessels with live animals. 3rd, Vessels with mail. 4th, Cargo vessels according to arrival in port.

A new dock is in service with 258 m. length and will be dredged to 35 ft. depth.

Cranes and Cargo Handling Equipment:

1 floating crane 30 tons capacity.
2 electric portico cranes of 3 tons capacity.
80 fork lift trucks. (2 of 45000 pounds capacity).
26 tractors, 27 cargo platforms.

STEVEDORES: Can be requested with 4 hours notice. Work starts 0800, 1000, 1600 and 1800 hrs. Orders can be cancelled as follows:– for 0800 and 1000 hrs. start up until 2200 hrs. previous day, for work commencing 1600 and 1800 hrs. 2 hours notice is required. When ship is delayed there is a conventional attendance of 2 hours, after that time stevedores retire charging the vessel with 4 hours work (Union arrangement). No work on Sundays, also no work on January 1st, Good Friday, November 11th and December 25th. Stevedoring requirements for Mondays can be made up until 10.00 hrs. on Saturday only.

Port Authority charges commence when the Pilot boards on arrival and cease when the Pilot disembarks on sailing.

BULK HANDLING FACILITIES: Grain unloading undertaken with clamshell or vacuum equipment for bagging on the Quay. Rate in excess of 1,200 tons for a 16 hour shift.

MEDICAL: Requests for medical service through Telecom Radio Station. 6 hospitals. Medicine faculty and medical personnel first class. Also dental services. Vaccinations can be given.

TANKERS:

(a) Ecopetrol: Empresa Colombiana de Petroleos. Muelle Nestor Pineda. Position: within bay of Cartagena, 5 miles N.E. of bay entry (Boca Chica). Port formed by two ocean platforms, with two protections at each side, 0.5 mile distance from Mamonal Bay. Depth 54 ft. with 6 interconnecting lines. Pilotage: through "Mooring Master" of port. Entry restrictions, none; 24 hours service. Tankers dimensions: length 850 ft., beam 110 ft., draft 38 ft., tonnage 40,000 d.w.t. Tugs: not used. Tide: 1 ft. 6 in. fluctuation. Fresh water: can be obtained when berthed, 4 in. diameter pipeline. Precautions against fire: fuel cannot be delivered by barges when vessel is berthed. Pipe-line delivery of bunker fuel oil available. General: requested that vessel arrive with minimum ballast (clean if possible). No dirty ballast to be pumped into the bay. Violation subject to fine. If impossible to arrive with clean ballast, dirty ballast will be discharged through cargo line. Rate of pumping: fuel oil 10,000 B/H; diesel oil 11,000 B/H.

(b) Mamonal: Muelle Refineria Ecopetrol. 7 miles (approx.) South of Cartagena Town and 5 miles East of Boca Chica entrance Channel. Approaches and Pilotage: same as for Cartagena (see above). Mooring Master boards about 0.5 mile off dock and remains aboard whilst vessel at Mamonal. Mooring Master has to be provided with own cabin and victualling. Max. Size: length 850 ft., beam 110 ft., draft 38 ft. Berth: "T" shaped platform with dolphins. Lines to buoys off both bows and from stern, 2 mooring lines should be joined together for starboard quarter line. Ballast: no dirty ballast to be pumped into bay. If possible arrive with clean ballast; dirty ballast can be discharged ashore. The shore deballasting facilities consist of 1 tank with 75,000 bls, capacity; the pipeline is 2,835 ft. long and of 16 in. diameter. Three hoses of 8 in. diameter are connected for deballasting. Fresh water: not available except at Cartagena. Fuel: available, Bunker "C" and diesel oil.

FRESH WATER: Available at all berths.

DENSITY: 1015 (At Mamonal)

DEVELOPMENTS: Draft increase; periodical cleaning of bay and basin. Enlargement of Marginal No. 1. Paving of yards and construction of new warehouses and workshops.

WATCHMEN: Watching service at the gangway and deck. Officially this service is done by port's guards. It is recommended that members of crew assist in this service.

CLOSING/OPENING HATCHES: Undertaken by port stevedores.
IDENTIFICATION CARDS: Agents supply cards signed by port Captain and Master.
CONSULATES:

Costa Rica	40583	Mexico	44604
Chile	44942	Nicaragua	41362
Denmark	43669	Sweden	43550
El Salvador	20142	Venezuela	41254
Germany	20162	Ecuador	42645
Finland	43669	Peru	40678
Italy	41583	Panama	47554
Netherlands	41750	Spain	42685

DRY DOCK: Commercial Shipyard "Conastil" with slipway facilities for ships up to 1,300 d.w.t. 9 ft. max. draft. Floating dock capacity for vessels of up to 400 ft. length, 55 ft. beam, 19 ft. draft and 3,000 d.w.t.
REPATRIATION: Facilities available for crew changes.
AIRPORT: Runways for large jets. Flights to Miami on Saturdays and Sundays, (5 flights) served by Avianca, Sam, Aerocondor. Lacsa serves 2 flights weekly to Maracaibo and Caracas. (Sunday and Friday). Connections through Barranquilla and Bogota airports for Europe and USA.
TIME: Colombian official time: 5 hours behind GMT. Permanent.
HOLIDAYS: Eighteen days of holidays during year, but at terminal there is no service on following dates only: New Year Day (January 1); Good Friday (Viernes Santo); Labour Day (May 1); Cartagena Independence Day (November 11); Christmas Day (December 25). During the days December 24 and 25 work is done only until 1100 hrs. During other holidays there is 24 hour service with 50% surcharges.
POLICE/AMBULANCE/FIRE:

Police Radio patrol	04
Red Cross	20360
Hospital Universitario	22380
Hospital Bocagrande	40270
Hospital Naval	40248
Clinica de Manga	40762
Clinica Cartagena	20910
Ambulance of Terminal	Channel 16 VHF
Firemen of Terminal	Channel 16 VHF
Firemen of Cartagena	42222, 20903

TELEPHONES: May be placed aboard.
SHORE LEAVE: Crew allowed to disembark. Every member of crew is given card signed by Port Captain and Master of the vessel.
REGULATIONS: To clear the wharf if required for tourist vessels or export cargo vessels.
GENERAL: Cartagena can be entered or left at any time day or night. Vessels can also berth or unberth in dry season or rain seasons, and services are rendered during 24 hours.

There is a very tight security system with a detachment of 145 port police, watch towers, dogs, sodium vapour lighting, access control, full identification, cargo control unit. This new unit, and the administrative controls that complement it, has reduced losses to near vanishing point.

The port has international communications with telex, phone and cable. Complete marine service with VHF and can communicate with Bogota and the other Colombian ports with S.S.B. radio.
SHIPMASTERS REPORT: 1976.
Advice of ETA should be telexed from Cristobal and confirmed by radio upon departure from that port. Agents also request that they are advised prior to vessels arrival, of commodity and tonnage for discharge in each hatch. This should be included in the telex from Cristobal to enable them to arrange the labour and equipment for unloading.

Pilot boards from a black hulled motor launch, about a half mile outside Boca Chica. The launch flies "H" flag by day and white over red lights at night. The Pilot has a portable VHF radio and works on Channel 16. If the pilot boat is not waiting on arrival he can be summoned by sounding 3 blasts on the whistle, at which signal he appears from the Pilot station at Fuerte San Fernando, on the northern side of the entrance. The prevailing wind would normally make the starboard side the lee side for the pilot ladder on arrival.

There are 2 piers, each capable of taking 1 large vessel on each side. Depths vary from 28 to 31 ft. The piers are in good condition and are well fendered. A tug is available and assists in berthing by pushing vessel alongside. The tug also stood by on departure but was not used. Cartagena has now become a popular cruise port and on occasions when 2 cruise liners are in port at the same time, delays could be incurred to cargo vessels.

Cargo for discharge consisted of palletised milk powder. The stevedores worked well and achieved an average rate of discharge of 16 pallets (24 tons) per hour. Ship's gear is used, there being no cranes on the piers. There is a 30 ton floating crane available for heavy lifts. Fork lift trucks etc., are hired by the Agents from various sources in the town.

Precautions should be taken against theft by locking up everything possible. It is customary to employ 3 shore watchmen who are fed on board.

No difficulties were experienced with the arrival papers and in this respect much assistance was received from the Agents at Cristobal in preparing Manifests, etc. It is essential that in future, Bills of Lading and Manifests covering cargo for discharge at Colombian ports, are placed on board before departure from vessels final loading port.

Fresh water and provisions are available but Agents should be notified of any requirements whatsoever prior to arrival. Landing Cards, supplied by Agents and signed by Master are required for shore leave.

The following papers are required on arrival:

Clearance from previous port.
Register.
Health Declaration.
*4 Lists Crew personnel effects.
*7 Passenger lists (or negative).
*7 Lists dry/bonded stores.
*4 Lists Deck and Engine Stores.
*7 Crew lists (1 with vaccination dates to be attached to health declaration)
*3 Lists commodity/tonnage for discharge in each hatch and tonnage of transit cargo.
2 Lists ship's information (Tonnages, owners, length, fuel and water on board, etc.)
4 Lists mail for discharge (or negative).
*8 sets Sobordos (manifests) with Bills of Lading (2 to be freighted in US dollars)
15 Tally books in alphabetical order of cargo marks. (for use of tally clerks in discharge)
*Require to be Consular stamped before arrival.

AUTHORITY: Empresa Puertos de Colombia, Gerente, Terminal Maritimo y Fluvial de Cartagena.

COVENAS (Gulf of Morresquillo): 09.25 N. 75.42 W.

See "General" before first port.
DOCUMENTS:
3 Crew Lists.
Passenger List.
Customs Documents.
Manifests.
Bill of Lading.
Ships Papers.
Clearance Ballast Manifest.
Crew's Personal Effects Declaration.
Vaccination Certificates.
Stores List.
PILOTAGE: Advise ETA 72, 48, 24 hours in advance. Pilot leaves dock on sighting vessel. Ship boarded approx. 1 mile N.W. of sea buoy or at anchorage. Pilot boat is 25-ton tug, 60 ft. length, 500 h.p., steel hull.
ANCHORAGE: Vessels arriving at night anchor 1 mile N.E. of lighted marker buoy. Bottom – mud.
RESTRICTIONS: Docking only during daylight 0500-1730 hrs. Undocking – any time.
MAX. SIZE: Length 800 ft., draft 42 ft. 6 in. Depth in approach Channels 42 ft. Mean tidal range 18 in. Current 3 knots (max.).
HEALTH: Quarantine officials board ship at berth or at anchor. Accommodation ladder should be rigged for Quarantine and Customs Officials. From December to March ladder should be rigged on port side due to prevailing North wind.
RADIO: Radio traffic addressed "Sagoc Tibu" via Barranquilla or Cartagena radios.
TUG: Tug-pilot-boat leaves dock on sighting vessel.
BERTHING: Vessels use stbd. anchor with approx. 5 lengths of chain, and 2 stbd. mooring buoys aft; 2 port mooring buoys aft and 2 port mooring buoys forward. All mooring lines should be 120 fathoms. Prevailing wind 310°. Terminal is a sea-berth approx. 1 mile from illuminated marker buoy. The berth has now been taken over by Ecopetrol and may be used in future for the discharge of imported crude.
MEDICAL: Doctor on call at any time. Twelve-bed hospital.
LOADING: Hoses connected on port side 2×10 in., each 2.5 tons, to be lifted by ship's boom and winch. Pipe-line 20 in. 7,300 ft. from pump station to berth. Average pumping rate: 2,000 t.p.h. Max. pressure ashore: 120 psi. 3 grades of oil handled by same pipe-line. Approx. API gravity of crudes: heavy Barco 32.5, Cicuco 45.5, Valasquez/Barco mix 24.0°
DENSITY: 1021.
FUEL: See "General" before first port.
IDENTIFICATION CARDS: If required by Customs, issued by Sagoc.
CONSULS/REPAIRS/DRYDOCKS/FUEL/FRESH WATER: None.
REPATRIATION: Only if sick crew member left ashore after vessel sails.
AIRPORT: Barranquilla. Flights to U.S.A., Europe and other South American countries.
TIME: Eastern standard time. GMT minus 5 hours.
HOLIDAYS: Loading carried on during holidays and week-ends.
SHORE LEAVE: At discretion of Captain. Crew uses private motor vessel at own risk.
REGULATIONS: Vessels should arrive with clean ballast. No dirty ballast to be pumped into bay, violation subject to penalties. If impossible to arrive with clean ballast, dirty ballast will be discharged through cargo lines and 3,000 barrels of dirty water displaced into vessel. Capacity of slop receiving facility unlimited.
DELAYS: Only when other vessels occupying mooring.
AUTHORITY: Ecopetrol.

POZOS COLORADOS TERMINAL: 11.09 N. 74.15 W.

OPERATORS: Chevron Petroleum Co.

DOCUMENTS: See "Santa Marta"

LOCATION: North Coast of Colombia, approx. 6 miles S.W. of Santa Marta.

MAX. SIZE: Berth in approx. 55 ft. of water and can accommodate vessels of up to 69,000 d.w.t. with max. draft 45 ft.

PILOTAGE: Mooring Master will meet vessels approx. 1 mile seaward of terminal location. He will remain on board throughout the vessel's stay and should be provided with accommodation.

CLEARANCE: Port authorities board with Mooring Master to enter ship and attend all formalities.

BERTHING: Vessels lie in berth in approx. due North heading; vessel's lines run by means of mooring launch to stern, quarter, and breast buoys. Vessels up to 20,000 d.w.t. require at least 5 good manilla lines; vessels in excess of 20,000 d.w.t. require at least 7 good manilla lines. These lines must be of not less than 120 fathoms length. Synthetic lines of equivalent strength may be used. Vessels equipped with wire mooring winches may use wires in lieu of fibre lines. When mooring, required use both bower anchors, each having at least 150 fathoms of chain and be prepared handle 5-ton lift on starboard side at ship's manifold. Because of rigidity of submarine hose, a small movement of vessel out of correct position could damage submarine equipment. Extreme caution must be exercised to assure that vessel is correctly moored. During loading operation slack must be kept out of submarine hose by adjustment of vessel's anchor and lines.

HOSES: Submarine hose 16 in. with 16 to 12 in. reducer for connection to vessel's 12 in. deck hose. For vessels not equipped with 12 in. deck hose, a 12 to 10 in. reducer is available. A 25 ft. length of 10 in. deck hose is also available for vessels not having a deck hose on board. Ship's crew performs all hose connecting, disconnecting, etc.

CARGO HANDLING: Rio Zulia Crude Oil has following specifications: Gravity, approx. 41.2° API. Flash, below atmospheric temperature. Reid vapour pressure, 5 to 8 psi. Pour point, +85°F. Sulphur, wt. %, 0.3 Wax, wt. %, 16.

Rio Zulia Crude has high wax content (about 16% by weight). Above 90°F. Rio Zulia Crude will flow easily and is about same viscosity as heavy No. 2 oil. Below 90°F. it rapidly becomes more viscous until it is similar to petroleum jelly or heavy lubricating grease.

Temperatures: Loading temperature of this cargo at Pozos Colorados between 85 and 90°F. Vessel should maintain loading temperature in wing tanks or if necessary gradually raise temperature to approximately 85° to 90°F. Approx. 2 to 3 days prior arrival discharge port, vessel should start to heat cargo in centre tanks so that upon arrival discharge terminal, average cargo temperature is between 100° and 105°F. for both wing and centre tanks. This temperature should be maintained throughout discharge. When discharge is through a submarine line in cold waters or over docks, when ambient temperatures are extremely cold, it is recommended that above temperature be increased 5° to 110°F.

Tank preparation: Cargo tanks which on previous voyage contained sour crudes (similar to those loaded in Arabian Gulf) should be machine washed with hot water at max. pressure order remove from tank bottoms all free oil remaining from previous voyage. Machines should be spotted low in tanks so as obtain max. washing over tank bottoms. Upon completion of deballasting, cargo tanks should be stripped dry and cargo pumps and lines drained so that tanks, pumps and lines free of pumpable water when cargo loaded into them.

BALLAST: The utmost care must be exercised by all tankers to avoid any contamination of the terminal bay waters, since the entire area is a developing tourist resort. This means that absolutely no deballasting or disposal of bilge water must take place in the bay. Shore deballasting facilities can handle up to 84,000 bbls. if ship provides advance warning.

FUEL: No bunkers available at terminal. See "General" before first port.

REPAIRS: Limited repair facilities available in Santa Marta, approximately 6 miles from terminal.

MEDICAL: Doctor and hospital located at Santa Marta.

CONSULS: No consular office in vicinity of terminal. Nearest Consuls, located in Barranquilla, approx. 35 miles distant.

SHORE LEAVE: Through the ship's Agent, shore leave can be arranged, but sufficient crew must remain on board to handle emergencies.

GENERAL: No petroleum inspection services. No ship's stores.

SANTA MARTA: 11.15 N. 74.14 W. (See Plan Book)

DOCUMENTS:

For the Port Captain:

1 Clearance from Last Port.
1 Voyage Report.
1 Crew List.
1 List of Passengers for Santa Marta.
1 List of Passengers in transit.
1 List of Provisions.

Vessel Certificates: (these only need to be shown)

Registration Certificate.
Load Line Certificate.
Classification Certificate.
Safety Equipment Certificate.
Radiotelegraphy Safety Certificate.
Construction Certificate.
Cargo Handling Equipment Safety Certificate.
Oil Pollution Certificate.

For Port Health Authority:

Derating Certificate.
Maritime Health Declaration.
Crew List with dates of vaccination.
List of Passengers for Santa Marta.
List of Passengers in Transit.

For Customs:

3 Cargo Manifests.
3 Crew Lists.
3 Lists of Passengers for Santa Marta.
3 Lists of Passengers in Transit.
3 Lists of Crew Personal Effects.
3 Lists of Provisions.
3 Mail Lists.
1 Single Document.

For Agencies:

1 Voyage Report.
6 Crew Lists.
6 Lists of Passengers for Santa Marta.
6 Lists of Passengers in Transit.
6 Crew Personal Effects Lists.
2 Lists of Mail for the port.
4 Cargo Manifests.
4 Bills of Lading.
2 Cargo Stowage Plans.

PILOTAGE: Locate Morro Grande Islet and lighthouse, proceed then to location 0.7 miles South of Westernmost point this islet where Pilot will join ship. Information regarding ETA should be relayed to Agent, who will advise port authority.

ANCHORAGES: When it is not possible for the vessel to come alongside a berth immediately, the Captain may anchor within the area included within the following coordinates.

Lat. 11° 14′ 45″ N.	Long. 74° 13′ 15″ W.
Lat. 11° 14′ 45″ N.	Long. 74° 14′ 00″ W.
Lat. 11° 14′ 15″ N.	Long. 74° 13′ 25″ W.
Lat. 11° 14′ 15″ N.	Long. 74° 14′ 00″ W.

Seabed is rocky and sandy, with depths about 120 ft.

Vessels should anchor in the lee of the Morro Grande and Morro Paqueno (Large and small headlands), particularly during the months of December to March, when there is a strong N.E. wind.

RESTRICTIONS: None. Good visibility throughout year. Difference in tides negligible.

MAX. SIZE: 730 ft. length, 40 ft. draft. No limit to beam. Oil carriers: refer to Pozos Colorados.

PRATIQUE: Pratique granted by Port Captain who visits vessel immediately on arrival. Doctor also attends on this visit.

RADIO: Barranquilla Radio or Cartagena Radio; radio stations messages relayed by telex to Sta. Marta. Ship's Agents use same system. Terminal Office may be contacted on radiotelephone, 2738 kHz.

TUGS: Join vessels just before entrance to inner harbour; they may use own lines or vessels lines.

BERTHING:

Quays	*Length*	*Minimum Depth*
No.	540 ft.	42 ft.
No. 2	540 ft.	47 ft.
No. 3	760 ft.	37 ft.
No. 4	465 ft.	28 ft.
No. 5	465 ft.	35 ft.

Facilities exist for container traffic. 30,000 tons silo for grain storage and discharge facilities for up to 5,000 tons per day.

STEVEDORES: ETA to be given 72 and 24 hours before arrival, indicating number of gangs required. Unloading rate of general merchandise 10 t.p.h., and homogeneous cargoes around 15/20 tons.

No work from 2300 hrs. Saturday until 0700 hrs. Monday.

MEDICAL: Advance notice required whenever special medical attention needed on arrival; hospital available.

TANKERS: See "Pozos Colorados".

DENSITY: Tropical sea salt water density.

FRESH WATER: Available alongside docks: delivery (approx.) 10 t.p.h.

FUEL: Not available. Nearest supplies at Barranquilla.

GANGWAY/DECK WATCHMEN: Deck watchmen supplied by Agent.

OPENING/CLOSING HATCHES: By special gang ordered by Agent.

SHIP CERTIFICATES: Load Line, Cargo Gear, Classification, Lifeboat, Main Engines, Radio Equipment, Fire Fighting Equipment, Ship's Register, Officers' Certificates (licences).

CUSTOMS ALLOWANCES: (Tobacco), 2 cartons of cigarettes per man. All other tobacco will be sealed by Customs. (Wine and/or Spirits), 1 open bottle of liquor permitted per crew member. All other spirits will be sealed by Customs.

IDENTIFICATION CARDS: Given by Port Captain once quarantine is cleared.

CONSULS: The following countries have consulates in Santa Marta.

		Phone
Belgium	Cra. 1a. No. 22-80	2404
Spain	Calle 19 No. 3-26	3559
Guatemala	Calle 11 No. 1C-23 P.8	4048
Italy	Iroka el Rodadero Building.	
Norway	Calle 11 No. 1-C-23 Dpto. 306	3501
Ecuador	Calle 12 No. 16-E-93	2643
Costa Rica	Avda. Libertador No. 33-47	2199
Netherlands and Sweden	Calle 15 No. 3-94	3403
Panama	Calle 25 No. 18A-105	
Peru	Calle 16 No. 1-92	3420
Dominican Republic	Cra. 21 No. 15-99	
Finland	Edificio de los Bancos Oficina No. 605	5317

REPAIRS: Only minor welding.
REPATRIATION: Facilities available.
AIRPORT: 19 miles from town.
TIME: 75th Meridian time, Eastern standard time. GMT minus 5 hours.
HOLIDAYS: New Year (January 1st); Church Holiday (April 12th); Labour Day (May 1st); Local Holiday (July 29th); Church Holiday (December 24th); Christmas Day (December 25th); Church Holiday (December 31st). No work on New Year's Day, Labour Day, Local Holidays, Christmas Day. Work until 1600 on other holidays.
POLICE/AMBULANCE/FIRE: Police, tel. 6079; Ambulance, tel. 3116 – 5555; Fire, tel. 6091 – 4545 – 6055.
SHORE LEAVE: Granted after quarantine cleared.
DELAYS: Up to 12/14 hours because of shortage of docking space.
AUTHORITY: Port Captain.

TUMACO: 01.49 N. 78.45 W.

DOCUMENTS:
5 Crew Lists.
5 Stores Lists.
5 Passenger Lists (local, in transit, or negative).
1 Sanitation Declaration.
12 Complete sets Manifests.
3 Mail Certificates (when not included in Manifest).

PILOTAGE: Compulsory. Entrance to the port can only be made during the day by vessels with a max. draft of 19–20 ft., due to the bar between buoys 2 & 3.

For the Tumaco Terminal vessels are boarded by the Pilot at No. 1 Sea buoy.

ANCHORAGE: Sufficient area available in depths of 25 to 35 ft.
RESTRICTIONS: Entrance channel depth 20 ft. Height of tide varies from 8 to 12 ft.
HEALTH: On arrival, port doctor boards vessel to inspect crew Smallpox Vaccination Certificates and Yellow Fever Certificates, also Deratisation Certificate. If any crew members suspected suffering contagious disease Master to radio prior arrival advising Agents accordingly. Port Doctor visits vessel even if previous port was in Colombia.
RADIO: Ships must communicate with the Texaco Head Office in Bogota, who will then inform the Terminal. The Terminal can be reached using VHF Channel 16 at a range of up to 30 miles.
BERTHING: Wharf is 310 m. long. Depth alongside averages 30 ft. Berthing for two vessels of 4,000–5,000 tons.
TANKERS: Vessels moor to 7 buoys, using both anchors. Ships Head 255° T. Max. size 55,000 d.w.t.

Manifold connections are 12 in., although 10 and 8 in. reducers are available. Hoses are connected on the starboard side.

The Mooring Master will remain on board throughout, and accommodation must be provided. Fresh water not available.

FRESH WATER: Available from wharf.
FUEL: Supplied by Esso Colombia, by barge.
CARGO GEAR: Terminal owns 3 cranes of 5 to 15 tons capacity.
AIRPORT: Suitable for DC.4 type aircraft, situated 4 km. from port.
DEVELOPMENTS: Programme for deepening the port to 33 ft. at high water.
AUTHORITY: Empresa Puertos de Colombia.

TURBO: 08.06 N. 76.43 W.

ANCHORAGES: Anchorage 2.5 to 3 miles off mouth of Leon River, used for loading bananas from barges.
CLEARANCE: Vessel must first proceed to Punta las Vacas for official visit of Port Authorities to obtain clearance.
MOORING: With sea and wind from the North, loading operations are not possible unless vessel employs the "Baltic Moor".

On arrival at the Leon River Anchorage, vessels should let go a couple of shackles. After that, a 3 to 3.5 in. wire (or mooring line) is passed from the after leads on the poop, along the ship's side, outside and clear of everything. This wire is to be shackled to a number three chain shackle.

By heaving in the wire and slacking the chain as required (about a 60° angle) vessel will give the necessary shelter to banana barges, for normal cargo operations.

SHIPMASTERS REPORT: *1976. Chart used No. 24515 (American).*

Vessels ordered to Turbo first proceed for clearance off Turbo town and anchor in position about one mile West of Pta Las Vacas Lighthouse (08° 04′ N. 76° 45′ W.). The lighthouse, which is situated on the Southern end of Pta Las Vacas is not readily identifiable from the N.W. until within about 2 miles and the light is reported to be poor. The chart in the area of Pta Turbo, about 4 miles Northward of Pta Las Vacas, does not correspond to the radar picture presented, and therefore a berth of at least 2 miles is recommended.

After clearance by Port Authorities at Turbo vessels should proceed to Pinchindi, about 7 miles W.S.W. of Pta Las Vacas, for loading during the period December to May. It is reported that during the season May to December vessels load off the mouth of the Rio Leon, about 7.5 miles S.S.E. of Pta Las Vacas. Approaches to this berth apparently pose no problems and the loading position is reported to be close to a buoy off the river mouth, the position of which could not be confirmed.

There is no Pilot available at Turbo.

Vessels loading at Pinchindi should steer to pass about 1.5 to 2 miles S.E. of Boca Pinchindi. When the black buoy, fl. 3 sec. (marked on chart No. 24515) bears about 335° true, but not less than 315° true course should be altered to bring the buoy right ahead and anchorage should be taken up as convenient on this bearing. The black buoy referred to above is very difficult to pick up against the land, and in February 1976 was extinguished. There are two mooring buoys to the Eastward of the black flashing buoy. These are unlighted and not marked on the chart. Positions of these mooring buoys are as follows, bearings and distances from the black fl. 3 sec. buoy: BWVS 83.5° true×380 m. R 99.5° true×760 m. These mooring buoys are more readily indentifiable from the offing than the fl. 3 sec. buoy, particularly the red one, which is painted in "International Orange". However it should be borne in mind that this buoy may have just received a new coat of paint at the time this report was written. The red buoy may be seen over the land which lies on the Eastern side of the anchorage before course is altered for the final approach. Vessels of draft up to 25 ft. may anchor up to within about 300 m. of the fl. 3 sec. buoy in about 22 m. of water.

As the wind strengthens during the afternoon to about force 5/6 from between N. & N.E., and due to the proximity of other vessels in the anchorage, it was considered advisable to use two anchors; the vessel in fact used port anchor with 4 shackles on deck and starboard anchor underfoot. This prevented the vessel from yawing more than a maximum of about 15°, while other vessels moored with only one anchor were observed to be yawing considerably more during the afternoon breeze.

Winds, during the period while the vessel was at Turbo (February 2-4) were predominately from North to N.E. and no significant currents were observed in the anchorage described above.

Caution is advised while navigating in this anchorage at night, as vessels loading logs often have large unlighted timber rafts alongside. It should also be borne in mind that tugs, lighters and launches are often unlighted, and radar echoes from these might easily be mistaken for those of the buoys. While the radar echoes of the land in this anchorage are quite clear, they do not in any way correspond with the chart.

No opportunity presented itself for checking soundings, however, on the vessel's track arriving and sailing soundings on the whole agreed with charted depths.

Loading of bananas is carried out in the anchorage using mechanical conveyors from lighters through vessels sideports, and on the whole was found to be quick and efficient.

No freshwater or provisions are available at Turbo. Indeed no facilities whatever are available from ashore. There is no radio station, although banana shippers "Uniban" have VHF 16 in their office during office hours, Spanish language only. Agents for United Brands Company have VHF Channel 16, call sign is "Casanova".

Caution should be exercised when taking any navigational advice from Officials in Turbo as this may at times be misleading and it is questionable whether persons proffering advice regarding best anchorage position etc. are in possession of all facts necessary for safe navigation in the area.

Documents Required for Inward Clearance at Turbo:
1 Clearance from last port.
6 Crew Lists.
5 Passenger Lists (Nil passengers to be declared).
5 Disembarking Passengers.
5 Mail Lists (No mail to be declared).
1 Maritime Declaration of Health.
1 Vaccination List.
6 Manifests.

Ships Certificates for Inspection:
Register.
Safety Equipment Certificate.
Safety Radio Certificate.
Radio Station Certificate.
Cargo Gear Certificate.
Derat Certificate.
Ships Capacity Plan.

In addition to above list of documents required, the following are also to be presented to Authorities on arrival:
2 Store Lists.
2 Crews Personal Effects.

Congo (Peoples' Republic of)

DJENO TERMINAL: 04.56 S. 11.54 E. (See Plan Book)

LOCATION: The loading point is located 3,800 m. from the coast in position 4° 56′ 35″ S., 11° 54′ 15″ E., that is to say 9.5 miles S.S.E. of the main Pointe Noire lighthouse.

NAVIGATION:

Djeno Lighthouse: Position 04° 55′ 01″ S., 11° 55′ 45″ E.

The Terminal has a prohibited area which is covered by the red sector of light. No vessel may enter this area between depths of 50 m. and 70 m. as there are offshore production installations, underwater pipe-lines and the loading point within the red sector from approximately S. 3° W. to S. 73° W. Also vessels may not proceed inside 25 m. depth of the red sector without a Pilot on board.

The lighthouse has the following characteristics:

17 m. metallic tower, aluminium colour;

Light is regular occulting light at four second intervals, light 29 m. above MHWS.

Range of white light 18 miles and red light 15 miles.

SBM: Equipped with radar reflector and white light with 60 flashes per minute, range six miles. The floating pipe extending over a radius of 245 m. round the buoy is lit by small white intermittent lights.

PILOTAGE: Compulsory. Pilotage is carried out by Pilots from Pointe Noire. Call signals for the Pilot are those provided for by the International Code. The Pilot station keeps a permanent watch on VHF Channel 16.

The Pilot boards the vessel 6.5 miles, 276° from Djeno lighthouse.

Limits of Pilotage Zone: South, parallel 5° 07′ S.; West, meridian 11° 46′ E.; North, parallel 4° 42′ S.

During the day, when leaving the mooring, request for Pilot is to be made to the Port Commander's Office 3 working hours before the hour of departure. If vessel is ready to leave and the Pilot has not boarded, he may be called by means of the following signal, International flag "G" and at the same time 3 long blasts on the ship's whistle.

If departure should be during the night, request for Pilot should be made to the Port Commander's Office before 1700 hrs., indicating as near as possible the probable time of departure.

Should any changes take place in the time of departure the Port Commander's Office is to be advised at least one hour in advance in order that the vessel should not incur any surcharge. During these hours call for the Pilot shall be made at the Port Commander's Office by the ship's Master or his representative.

Sound Signals: The use of ship's whistle is forbidden between 1700 and 0600 hrs.

Should Pilot be required at any time on a Sunday, order should be placed before 1200 hrs. on Saturday. Should a Pilot be required on a public holiday, order should be placed by 1700 hrs. on the day prior to holiday.

ANCHORAGE: Vessels loading at Djeno may anchor in depths of 35–38 m., approximately 6.5 miles – 276° from Djeno lighthouse in position 04° 54′ South, 11° 49′ East. Alternatively they may anchor at Pointe Noire Roadstead, 1 mile North of the outer dyke light.

MAX. SIZE: Maximum permissible draft 16 m. (52 ft. 06 in.). However, Elf Congo may reduce this draft if weather conditions are unfavourable. Also see "Berthing"

HEALTH: The Pilot may act for the Hygiene Department, Pointe Noire if instructed to do so by Pointe Noire.

RADIO: Call signal "T.N.A."

Permanent watch on 500 and 2182 kc/s from 0600 to 1800 hrs.

Transmits on 8,722 kc/s from 0930 to 0945 hrs.; from 1030 to 1045 hrs.

from 1330 to 1445 hrs. (G.M.T.)
from 1530 to 1545 hrs. ,,
from 1730 to 1800 hrs. ,,
on 13,101 kc/s from 0630 to 0645 hrs. ,,
from 0730 to 0745 hrs. ,,
from 0830 to 0900 hrs. ,,
from 1700 to 1715 hrs. ,,

Elf Congo Terminal: Watch VHF Channel 12 – 156.1 mc/s. whilst tanker at the loading point.

Pointe Noire Office: Call signal: "ECHO LIMA". Watch radiotelephony – 2182 kc/s.

Management of Port of Pointe Noire: Watch VHF Channel 16 – 156.8 mc/s permanent.

Advice of Arrival: Tankers shall have their arrival at Djeno notified by their consignees 72 and 24 hours in advance.

Thereafter, they shall notify any appreciable change in their ETA.

TUGS: Three tugs available from Pointe Noire. 1,000 h.p., 600 h.p. and 1,800 h.p. Request for tugs should be made at least 3 hours in advance and before 1700 hrs. if required during the night. For berthing, mooring boats will be supplied by Elf Congo.

BERTHING: The loading point of Elf Congo at Djeno is of an SBM type, with single mooring at the bow.

The vessel is moored by the bow to a buoy consisting of a cylindrical frame of diameter 10 m. and 4.35 m. high.

This buoy is moored by chains to 6 drilled piles. Anchor moorings extend over a radius of 300 m. around the buoy.

A 40 in. sea-line connects the tank farm with the loading point; the buoy is connected to the sea-line by 2 lines of flexible hoses 20 in.

The loading point is provided for the mooring and loading of fully loaded tankers of approximately 40,000 d.w.t. – 140,000 d.w.t. and half-loaded tankers of 240,000 d.w.t.

Depth of water at the buoy is 22 m.

Notice of Readiness: Shall be sent to Elf Congo.

MOORING: Mooring ropes supplied by Elf Congo. The vessel shall be ready to take aboard two mooring ropes, one on the starboard bow and the other on the port bow. Each rope consists of 42 m. of nylon of 13 in. circumference and 5 m. of 47 mm. diameter chain. Each rope is equipped with a polypropylene lead of 10 in. circumference, 105 m. long for one and 45 m. for the other.

Leads are passed to the vessel by a motor boat. The vessel shall have two ropes ready at the bow to take them aboard.

Mooring can be carried out by day as well as by night, weather and sea permitting.

The derrick shall be rigged before arrival on the port side with a minimum hook SWL of 5 tons.

The ship's manifold shall be made ready on the port side for connection of the two 12 in. flexible hoses.

Flexible Hoses: Loading of vessels carried out through 1 line of 220 m. of 20 in. flexible floating hose, terminating in 2×20 m. sections of 12 in. flexible hose. Manifold connections on board shall be 12 in. ASA flanges. Elf Congo can supply 10 in. to 16 in. reducers.

During connection and disconnection of the flexible hoses, assistance by the crew is essential, in particular for the handling of the winches and derricks. During the whole stay of the vessel at the loading point, the Pilot shall maintain safety watch on board and also assume the duties of head of loading in the absence of a representative of Elf Congo.

The Elf Congo service vessel shall remain at the disposal of the Pilot and shall remain alongside the tanker or nearby. A ladder must be kept permanently alongside the vessel so as to permit access by the team in charge of the flexible hoses.

LOADING: Loading may be carried out with a maximum flow of 8,000 cu.m./h. with two 20 in. lines or 5,500 cu.m./h. with a single 20 in. line, finished with 2×12 in.

Inspection of tanks after deballasting and after loading shall be undertaken in the presence of the Elf Congo loading representative.

The Terminal shall place on board the vessel sealed samples of the cargo.

Twenty minutes before the end of loading, the vessel shall warn the Terminal by VHF so that pumping may be stopped accordingly.

The ship's Master shall be fully responsible for the manoeuvring of the valves and safety of the cargo on board.

DEBALLASTING: The Djeno storage installation is not equipped to receive dirty ballast. The vessel shall, therefore, arrive with a clean ballast.

Any vessel arriving with dirty ballast may be forced to leave the loading point and delay arising therefrom shall be fully incumbent on it. Acceptance of notice of readiness will be rectified accordingly.

It is forbidden to throw into the sea any cinders, burning materials, objects and waste of any kind.

The ship's Master shall be responsible for any leaks on board. Such leakage shall be stopped immediately.

Scuppers shall be plugged during the whole loading time.

SAFETY: The ship's Master shall be responsible for safety aboard the vessel at all times. Sufficient crew members must be aboard the vessel at all times for handling moorings and fire appliances. The vessels main engines must be kept ready at all times. A watch should be maintained to ensure that no undue stress is placed on the moorings and that the floating pipe-lines do not rub against the vessel. Also the vessel should not be allowed to come into contact with the single buoy mooring which may be caused by changes in current, wind direction or other reasons.

Smoking outside of authorised area, use of naked lights, or tools liable to cause sparks not allowed.

Vessel's anchors should be secured in the hawse pipe. No repairs allowed whilst at the mooring also no stores or equipment may be handled on the deck whilst at the mooring.

Whilst Loading: All hull valves shall be kept closed except those required for water circulation. The scuppers on the main deck shall be blocked. Two fire hoses shall be connected and placed one at each end of the vessel. The fire lines should be under pressure at all times.

If there is a fire aboard a vessel moored at the SBM, the following sound signal shall be given on the vessel's whistle: continuous short blasts. The Master of the vessel shall immediately take charge of fire fighting operations.

MEDICAL: There is one hospital, 2 clinics and several doctors.

FRESH WATER: Drinkable water at quays inside the port of Pointe Noire or by tanker of 200 tons in roadstead under shelter (minimum delivery 100 tons).

FUEL: Not available at Djeno. Vessels proceed to tanker berth at Pointe Noire.

REPAIRS: Workshops at Pointe Noire. Facilities for repairing radar and radios.

TIME: GMT plus 1 hour.

AIRPORT: 6 kms. from the port of Pointe Noire. 1 or 2 flights daily to Brazzaville. 1 or 2 flights daily from Brazzaville to Europe.

CONSULS: At Pointe Noire: French consulate, Tel. 94.00.02. Federal German consulate, Tel. 94.00.10.

GENERAL: *Charts:* French chart No. 3357 and B.A. chart No. 3206.

Stores: A ship chandler at Pointe Noire can supply vessels with any foodstuffs required.

Territorial Waters: The sovereignty of the Republic of the People of

Congo extends to thirty (30) nautical miles as from the lowest sea watermark along the coast.

Boat Service: A motor boat can be rented through the consignee. Elf Congo motor boats must not be used by the tanker crew except for an urgent medical evacuation.

Meteorology: The rainy season extends from November to May with a maximum in February and March.

Visibility: visibility can be reduced to less than one mile in June, July and August.

Sea: mean density of the sea at the loading point is 1.025. Sea temperature varies between 27°C in February (austral Summer) and 22°C in August (austral Winter).

Tide: tide is of a semi-diurnal type. Mean amplitude of spring tides is 1.60 m.

Wind: S.S.W. generally less than 15 knots.

Swell: generally S.S.W. less than 2.50 m. with periods of 10 to 12 seconds.

Current: sector S. to S.S.E. generally less than 1.5 knots on surface.

The current can change to the North without any apparent reason for a period rarely greater than two days.

SHIPMASTER'S REPORT: (1976): Received prior to above report.

Documents: Papers required on arrival:

Last port clearance.
2 copies Crew lists.
2 copies Vaccination Certificates dates.
2 copies Stores list and bond.
1 copy Crew Personal effects lists.

Pilot and Agent do all paper work.

Approaches: Pointe Noire shows up well on radar at 25/30 miles, but Djeno and the S.P.M. are poor. The phosphate wharf shows up well and projects out from the land about 2 miles S.E. of Pointe Noire breakwater.

Also see "Shipmaster's Report" of approaches to Pointe Noire.

Pilotage: Pointe Noire has 4 working Pilots, one of whom, on the rota system serves Djeno when a tanker arrives.

Both Pilot and Loading Master board from a fast Pilot launch off Pointe Noire and an assortment of mooring ropes and chains and messengers are taken aboard from a work boat which is also met 3 miles West of the breakwater. After that is completed, vessel proceeds the 9.05 miles to the S.P.M. at Djeno.

Max. Size: Depth of water at S.P.M. is 22 m. and the max. draft is 53 ft. (16.5 m.).

Berthing: Mooring to the buoy consists of:

Port and starboard mooring ropes, 42 m. of 13 in. circumference nylon and 5 m. of chain, polyprop messengers 10 in. circumference are attached to each rope for the initial haul-in. Port line first. Derrick to be rigged on the port side and manifolds to be ready port side to receive two 12 in. hose connections.

No dirty ballast reception facilities ashore, vessel must arrive with clean ballast. Crew moor vessel with assistance of 3 shore crew and advice of Loading Master who is on foc'sle head and liaises with Pilot on bridge.

Crew bring on board cargo hoses and connect same. Pilot and Loading Master remain on board throughout with Pilot changing every 24 hours.

OPERATOR: Elf Congo.

POINTE NOIRE: 04.47 S. 11.49 E. (See Plan Book)

PORT LIMITS: *Pointe Noire Pilotage area limits:*

South: 5° 07′ S.
West: 11° 46′ E.
North: 4° 42′ S.

DOCUMENTS: On arrival, the Captain must hand over to:

The Agents:

4 Crew Lists.
4 Lists of Crew Boys.
4 Passenger Lists or negative.
4 Lists of Ports of Call.
2 Lists of Crew Personal Effects.
2 Stores Lists.
5 copies of Cargo Manifest.
Captain's copy of B/L.

Harbour Authorities:

1 Arrival Form issued by Port of Pointe Noire.
1 Departure Form issued by Port of Pointe Noire.

Health Authorities:

1 Vaccination List for crew members.
1 Declaration of Health (form issued by the port of Pointe Noire).
Vaccination cards for the whole crew.

PILOTAGE: Compulsory. Telegraphic address: Harbour Master's Office of the Port of Pointe Noire. Pilot station can be contacted by VHF Channel 16; 24 hour service.

APPROACHES: *Shipmaster's Report:*

The approach to Pointe Noire from the West using Chart 4105 Freetown to Luanda is clear of dangers as far as our experience goes. After crossing the 200 m. (100 fathom) line the soundings are consistent with a gently shelving coast until there is 30/40 m., 3 miles West of Pointe Noire breakwater, where the Pilot boards.

Approaching Pointe Noire from the West the radar picture of the coast about 20 miles North of Pointe Noire is very similar to Pointe Noire itself. This could confuse and lead one to think that the ship is further South than she really is, but the cluster of oil rigs should be a good guide.

There is a cluster of oil rigs with flares S.S.W. by 13 miles from Pointe Noire main lighthouse, with another cluster about due South by 17 miles, both good radar targets. Do not go in between these clusters. The Pilot told me that there is another set of oil rigs about 10 miles N.W. of Pointe Noire light under construction. Watch out for numerous small dugouts, etc. fishing.

New oil rigs with 1 flare were constructed in 1977 in position 4° 28.8′ S., 11° 15.4′ E.

RESTRICTIONS: Minimum draft allowed for ore-carrying vessels of more than 130 m. drawing alongside at Quay G: 20 ft. aft and 15 ft. forward. Max. draft allowed for all vessels: 31 ft. at any hour. Max. draft allowed for ore carriers leaving Quay G is 34 ft. 4 in. (1 hour before high tide). Tying to mooring buoy can be done only between sunrise and sunset.

Max. draft tankers 34 ft. 4 in. Tankers to enter in same period as departing ore carriers (1 hour before high tide).

HEALTH: Port Health Officer boards immediately on berthing. Compulsory vaccinations: smallpox, yellow fever and cholera.

RADIO: Pointe Noire Radio, call sign TNA. Continuous service on 500 and 2182 kc/s from 0600 to 1800 hrs. GMT. Transmission on 8722 kc/s TNA from 0930 to 0945, 1030 to 1045, 1330 to 1445, 1530 to 1545, 1730 to 1800 hrs. GMT; on 13101 kc/s TNA from 0630 to 0645, 0730 to 0745, 0830 to 0900, 1700 to 1715 hrs.

Shipmaster's Report: If vessel is coming from the South it is advisable to pass messages through Luanda.

RADAR/VHF: The Harbour Master's office has a VHF set (call Channel 16) but no radar.

TUGS: 1 tug (1,800 h.p.) normally join the vessel as soon as it crosses the passage. The vessel's own lines are usually used.

BERTHING:

	Length	Draft Permitted
Quay D: Berth 1,	720 m.	24 ft.
,, 2,		26 ft.
,, 3,		28 ft.
,, 4,		29 ft.
,, 5,		29 ft.
Quay G: Ore Berth,	530 m.	34 ft. 04 in.
Tanker Berth,	—	35 ft.
Mole 1: Timber Berths,	350 m.	31 ft.
Lighter Berth,	—	12 ft.

Potash Berth: 4 miles Southward of Pointe Noire. Max. draft 44 ft.

STEVEDORES: The Agent requires the following information 48 hours in advance, in order to arrange gangs: precise ETA; number of gangs required for unloading/loading; distribution per hold unloading/loading; draft, fore and aft – before 0600 hrs. in the morning on weekdays counting as overtime; before 0600 hrs. Saturday mornings for the weekend or day before holiday also counted as overtime.

MEDICAL: Notice for medical attention not needed. There are 2 private clinics.

TANKERS: Diameter of loading/unloading lines: 6 in.=aircraft fuel. 10 in.="white product". 12 in.=1500 fuel. Hoses=8 in.

Also see "Djeno Terminal".

DENSITY: 1025 on average. Only slight variations according to tides.

FRESH WATER: 2 hoses can be connected at each berth. Rate: 20 t.p.h. per hose.

FUEL: Ordered from suppliers: Hydrocongo. Pipe-line supply to tanker berth and berths Nos. 1 and 8.

FIRE PRECAUTIONS: The port must be informed of ETA of tanker 24 hours in advance.

GANGWAY/DECK WATCHMEN: There are none at Pointe Noire, as it is unnecessary.

OPENING/CLOSING HATCHES: Usually the crew's responsibility. Can be carried out by the stevedore for payment.

CUSTOMS ALLOWANCE: No limit – must be stated on crew declaration, and quantities must be accurately stated.

CARGO GEAR: Derricks to be in good condition. There are 2 cranes at the new jetty.

IDENTIFICATION CARDS: Sailors' cards or passport needed.

CONSULS: France, Tel. 94.00.02–94.00.03. Germany (Federal) 94.00.10.

REPAIRS: Most repairs for the deck and engines are possible. Also facilities for electronic repairs. Floating crane, capacity 65 tons. (Not in service.)

DRY DOCKS: One slipway for vessels up to 800 tons.

REPATRIATION: Every facility for crews equipped with a crew card and passport.

AIRPORT: 6 km. from the port. 1 to 2 flights per day to Brazzaville. 1 to 2 flights per day from Brazzaville to Europe.

SHIPMASTER'S REPORT: Mail takes between 3 and 7 days from Pointe Noire to Paris, and Pilot assures that it is reliable.

TIME: Local time is GMT plus 1 hour.

HOLIDAYS: 1st January (1 day's holiday); 1st May (2 days' holiday); 31st July (1 to 2 days' holiday); 15th August (2 to 3 days' holiday); 1st November; 25th December (1 day's holiday).

POLICE/AMBULANCE/FIRE: Police 17; Fire 94.00.49; Ambulance 94.00.49, 94.21.98.

TELEPHONE: Cannot be connected on board ship but there is one in the middle of Quay D for the use of vessels.

GENERAL: As the Congolese Customs are very strict, the drawing up of the store list and crew declaration should be carried out very carefully, as the slightest error is penalised and a fine imposed.

Stores are expensive and not easily obtainable. Fish available also fruit and vegetables but not in the Rainy Season.

SHORE LEAVE: No restrictions.

PORT REGULATIONS: In the event of congestion, vessels are obliged to work at night and on Sundays, and if they refuse to do this, they may be relegated to the roadsteads and thereby lose their turn to draw alongside.

DELAYS: *Shipmaster's Report:* Occasionally tankers are delayed for long periods as the shore tanks may be full.

AGENT: Socopao-Congo, BP 714, Pointe Noire, Peoples Republic of Congo. Cable address "Freight". Telex: 8201. Tel. 94.08.78.

NOTES

Please also advise Shipping Guides Ltd.

Cook Islands

AVARUA, Rarotonga 21.12 S. 159.47 W.

DOCUMENTS:

Health: International Maritime Declaration of Health.

Customs: (Immigration)
2 Manifests of Cargo showing weight or measurement (basis on which freight calculated).
2 Crew Lists.
2 Passenger Lists (landing and transit). Each disembarking passenger to complete a landing card and baggage declaration.
Clearance from Last Port.

Agent: 5 Manifests of Cargo.
1 Crew List.
1 Passenger List.

PILOTAGE: No Pilot available.

ANCHORAGES: As shown on Admiralty Chart No. 1264. Prevailing wind is S.E. and the anchorage is safe except in some instances when wind and/or sea are fresh from N.W. through N.E. 4.5 to 5 shackles of cable in the water has been found the most satisfactory in normal circumstances.

RESTRICTIONS: None. Anchorage, in 25 fathoms, is well defined with cross leads and a vessel may anchor at any time.

MAX. SIZE: No restriction.

HEALTH: Vessel should radio Porthealth Rarotonga not more than 24 hours, or less than 12 hours, before arrival giving ports of call for preceding three weeks, number of crew, number of passengers, state of health and requesting free radio pratique.

RADIO: Radiorarotonga ZKR, 500 kHz., single operator watch; 2182 kc/s., and 6204 kHz. continuously.

Continuous speaker watch is also kept on Channel 16 of the VHF Maritime mobile band. Weather forecasts are broadcast daily by radio-telephone on 2206 kHz and 8732.1 kHz at 0615 GMT and 1815 GMT after a preliminary call on 2182 kHz.

VHF: Waterfront Commission have VHF radiotelephone for communication between vessel and office when working cargo. Base station Channels 6, 8, 12, 13, 14, 16. Three portable sets, Channels 6, 12, 16. Channel 16, 24 hour watch. Channel 12 on request. Radiorarotonga.

TUGS: Not available.

STEVEDORES: Cargo is lightered ashore by Waterfront Commission plant. Consisting of 6 double-ended lighters, 35 ft. in length of 5 tons deadweight capacity. Heavy lifts up to 10 tons can be accommodated by building a platform over 2 lighters but prior advice should be given: in particular if the lift is on wheels or skids or of exceptional height. Two launches provide towing power. Hours of work: 0700–1200, 1300–1700, 1800–2200 hrs. Average discharge rate 200 tons per day. Agents should have full particulars of tonnage to be discharged and number hatches to be worked.

MEDICAL: Medical and hospital facilities available. Usual international vaccinations/inoculations required depending on prior ports of call.

TANKERS: Petroleum products landed from small coastal tanker from Fiji.

DENSITY: 1025.

FRESH WATER: Available in limited quantities. Lightered 1,000 gallons per load. Cost: as current rate for lightering cargo. If a lighter is diverted from handling cargo to carry water the cargo handling rate will be affected.

FUEL: Not available.

DEVELOPMENTS: Harbour development at Avatiu (1 mile from Avarua) although not completed, is currently in use and accommodating vessels of about 1,000 tons (250 ft. length; 16 ft. draft).

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: By crew or stevedores to vessel's convenience.

TOBACCO ALLOWANCE: 200 cigarettes, or half pound tobacco or 50 cigars.

WINE AND/OR SPIRIT ALLOWANCE: Allowance is 1 broached bottle of either wine or spirits, or a reasonable quantity of beer per man, for consumption on board. Under no circumstances may any wines, spirits or beer be brought ashore.

CARGO GEAR: International standards acceptable. It is customary to work cargo from starboard side and a guest-warp should be rigged to starboard.

IDENTIFICATION CARDS: Not required.

CONSULS: New Zealand only is represented by a High Commissioner.

REPAIRS: Not available.

REPATRIATION: Confined to repatriation of crew landed for hospitalisation.

AIRPORT: Rarotonga International Airport is 2 miles away.

TIME: GMT plus 10.5 hours. No alteration during year.

HOLIDAYS: Cargo cannot be worked on any Sunday or on Good Friday and Christmas Day. Other Holidays: Boxing Day (26 December); New Year's Day; Easter Monday; ANZAC Day (25th April); Queen's Birthday (1st Monday in June); Constitution Celebrations (1st Friday and Monday in August).

POLICE/AMBULANCE/FIRE: Fire service available although Waterfront Commission have portable fire pump and approximately 600 ft. hose. Police and Ambulance: contact Waterfront Commission on VHF radio telephone.

TELEPHONES: VHF radio telephone only.

GENERAL: Green vegetables are always difficult to get. Tomatoes available May to November. Oranges, lemons, grapefruit, mandarins, tangerines, available March to August. Pineapples available November to February.

Limited quantities meat and fish available but these must be imported from New Zealand and a large order could not be met.

AUTHORITY: The Collector of Customs, Rarotonga.

AGENT: Waterfront Commission is the only one who stevedore vessels at the anchorage. They must be requested to accept the Agency for a particular vessel. Cable address "Waterfront", PO Box 61, Ships Agents and Stevedores. Union Citco Travel Ltd. – Subsidiary of Union Steam Ship Co. of New Zealand Ltd. and Cook Islands Trading Corporation Ltd. – ships Agents. They must be requested to accept the Agency for a particular vessel. Cable address Union P.O. Box. 54. Ships Agents and Travel Agents.

NOTES

Please also advise Shipping Guides Ltd.

Costa Rica

GOLFITO: 08.37 N. 83.10 W.

DOCUMENTS:

2 certified copies of Clearance from Last Port.

6 certified copies of Crew List and 6 copies for distribution.

6 certified copies of Passenger List and 6 copies for distribution.

2 certified copies of Cargo Manifest and 25 copies for distribution.

4 certified copies of Stores Provisions List and 6 copies for distribution.

3 sets of Bills of Lading.

NOTICE OF ARRIVAL: Radio Agent at least 24 hours before arrival advising date and time of arrival, number passengers disembarking, if any, amount of cargo to discharge in metric tons, number of gangs required to work on board. This information is required by Port and Customs Authorities.

PILOTAGE: No Pilot in port. Bananera Company sends a launch to pilot vessel to quay if requested. Arrival has to be notified at least 24 hours in advance.

ANCHORAGES: Anchorage area to S.E., diagonal towards end of quay. Depth: 35 ft. – 50 ft. Area 1,000 m. by 300 m. approx. Quay distance: approx. 500 m. Sufficient space for 4 vessels.

RESTRICTIONS: Vessel allowed to enter at any time, day or night.

MAX. SIZE: Length of quay is 1,040 ft., enough for two steamers to berth, one in banana berth and the other in cargo berth, each one of 450 ft. Depth 35 ft. alongside.

HEALTH: Any vessel that enters this port has to be in possession of a Sanitary Manifest (Sanitary Maritime Declaration) signed by Captain of vessel. In case of any suspected disease or fever aboard, Captain to notify by radio to Port Authorities and vessel to wait outside the limit of territorial waters until clearance is given.

RADIO: Station call sign TIM, frequencies 8478 and 500 kc/s. Working hours 0400–1300 GMT.

TUGS: No tugs. A launch from the Cia. Bananera takes lines from vessel to quay.

BERTHING: Vessels berth starboard side to. Vessels of Compania Bananera have preference.

STEVEDORES: Bananera Company controls gangs. Advance notice required. Work possible 24 hours a day.

MEDICAL: Bananera Company has a hospital for its employees. They can give assistance if a request through the Agency has been made 24 hours in advance. On arrival of vessel a valid vaccination certificate of each member of crew has to be shown.

TANKERS: Can berth in cargo area if length is less than 450 ft., depth is 35 ft. Diameter of pipe-lines 8 in. and 6 in.

FRESH WATER: Bananera Company supplies any quantity at a rate of 50 t.p.h. through shore hoses.

FUEL: Diesel and fuel oil available from time to time.

GANGWAY/DECK WATCHMEN: Available but not compulsory. Customs guard on gangway.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CUSTOMS ALLOWANCES: No limit on board but only one packet cigarettes when going ashore. No alcohol may be taken ashore.

IDENTIFICATION CARDS: Required.

CONSULS: Nicaragua, Honduras and Panama represented locally.

REPAIRS: Company Bananera of Costa Rica has a workshop that can do small repairs such as soldering or small winch repairs.

REPATRIATION: Can be arranged.

AIRPORT: One airport one mile from port. Serviced by two airlines "Lacsa Airlines" with two daily flights, one at 0700 hrs. and the other at 1030 hrs. "Ave Airlines" offer only one daily flight, Sundays included, at 0700 hrs. "Lacsa" has no Sunday flights.

TIME: GMT minus 6 hours.

HOLIDAYS: 1st January, no work can be arranged; 19th March, work at double time; Easter Thursday, no work can be arranged; Easter Friday, no work can be arranged; 11th April, work at double time; 1st May, no work can be arranged; Corpus Christi, work at double time; 29th June, work at double time; 2nd August, work at double time; 15th August, work at double time; 15th September, no work can be arranged; 12th October, work at double time; 8th December, work at double time; 25th December, no work can be arranged. Stevedores are not obliged to work Sundays and holidays if not voluntary.

POLICE/AMBULANCE/FIRE: It is sufficient to ask operator for connection with the desired department.

TELEPHONES: No facilities on board vessels.

SHORE LEAVE: Crew are allowed on shore.

DELAYS: Only when quay is occupied by vessels of Compania Bananera de Costa Rica, which have preference.

AUTHORITY: Comandante de Puerto.

PUERTO LIMON: 10.00 N. 83.01 W.

DOCUMENTS: Required by Port Authorities at Port Limon:

2 certified copies of Clearance from last port. (Zarpe) (original and dup.)

Crew Members List, legalised (Lista de tripulantes): 1 original, 1 copy. 5 additional copies not legalised.

Negative Passenger List, legalised (Lista de pasajeros negativos): 1 original, 1 copy. 5 additional copies not legalised.

Maritime Health Certificate, legalised (Certificado de sanidad maritime): 1 original, 1 copy.

Provisions List, not legalised (Lista de provisiones): 7 copies.

Stowage Plan, not legalised (Plano de estiba): Total cargo on board, 4 copies.

Hatch List, not legalised (Lista de carga por escotilla): Total cargo on board, 4 copies.

Cargo Manifest, legalised (Manifiestos de carga): From each calling port.

1 original, 1 copy. 30 additional copies, not legalised.

Bills of Lading – Non Negotiable copies (Conocimientos de embarque): From each loading port. 3 sets copies.

Local Agents or General Agents require the following documents urgently, by Air Mail (Special Delivery), from each calling port directly to address in San Jose, Costa Rica.

2 sets Cargo Manifest – copies

2 sets Freighted Manifest

2 sets Bills of Lading – Non-negotiable copies.

If there are Ocean Freight rates to be collected at destinations, please send Agent by Air Mail (register), the original (3) and copies (2), in order to get the payment of the freight rates in time.

Data in every document must be in Spanish or with proper translation.

NOTICE OF ARRIVAL: Radio Agent at least 24 hours before arrival, advising date and time of arrival, number passengers disembarking (if any), amount of cargo to discharge in metric tons, number of gangs required to work on board. This information is required by Port and Customs Authorities.

PILOTAGE: Pilot boards ship with Port Authorities about 1 mile from pier.

ANCHORAGES: One mile off piers.

MAX. SIZE: Tankers up to 30 ft. draft. Also see "Berthing".

HEALTH: In the event of suspected disease or fever on board, agency should be advised in advance.

RADIO: Call letters TIM, frequency 500 kc/s. and 8478 kc/s. – working hours 0400 to 1300 GMT.

TUGS: None available and not required.

BERTHING:

Maximum drafts on berths, (March 1978)

Pier No.	*Usage*	*Draft (ft.) Fore*	*Draft (ft.) Aft*	*LOA (ft.)*
1	Bananas	32	29	600
2	Conventional	25	26	400
*3	Conventional	21	23	450
4	Only F/boat service			
5	Conventional	13	18	300
6	Ro/ro	18	20	300
7	Conventional	18	24	500
8	Conventional	15	24	500
9	Conventional	9	11	200
10	Ro/ro	19	20	400

*Temporary out of service.

Note: Measurements are given in feet – Piers Nos. 1–2 have a length of 1,020 ft. In order to use No. 2 berth Agents need to know or check LOA of the banana vessel at No. 1 berth, as more than 400 ft. for berthing a cargo vessel may be available.

STEVEDORES: ETA should be sent to Agent in due time.

MEDICAL: Medical attention and hospital facilities available.

TANKERS: Mooring outside port (Moin Bay) vessels up to 30 ft. draft.

FRESH WATER: Available and obtained alongside pier delivered by hose, 1.5 to 2 t.p.h.

FUEL: Can be had only in small quantities.

DEVELOPMENTS: Constructing new pier with capacity of four berths and a possibility to extend the National Pier in the form "L". Depths to be increased to 30 ft.

GANGWAY/DECK WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: Carried out by stevedores.

CUSTOMS ALLOWANCE: One package cigarettes to take ashore. Not allowed to take alcohol ashore.

IDENTIFICATION CARDS: They are needed and supplied by the Agent.

CONSULS: Colombia tel. 580091; Ecuador; Nicaragua; Honduras tel. 580313 and Norway 580183.

REPAIRS: Minor repairs only.

REPATRIATION: Facilities available.

AIRPORT: Five miles from city. Three daily flights to San Jose International airport.

TIME: Local time minus 6 hours.

HOLIDAYS: 1st January, no work can be arranged; 19th March, work at double time; Easter Thursday, no work can be arranged; Easter Friday, no work can be arranged; 11th April, work at double time; 1st May, no work can be arranged; Corpus Christi, work at double time; 29th June, work at double time; 2nd August, work at double time; 15th August, work at double time; 15th September, no work can be arranged; 12th October, work at double time; 8th December, work at double time; 25th December, no work can be arranged; Stevedores are not obliged to work Sundays and holidays if not voluntary.

POLICE/AMBULANCE/FIRE: Police tel. 117; Red Cross tel. 580125; Fire tel. 118.

TELEPHONES: No arrangements for placing on board.

SHORE LEAVE: Crew members are allowed to go ashore.

DELAYS: Port congestion, shortage of railroad cars, etc.

AUTHORITY: Comandante de Puerto.

PUNTARENAS (including Caldera Bay):
09.58 N. 84.49 W. **(See Plan Book)**

DOCUMENTS:

2 certified copies of Clearance from Last Port.

6 certified copies of Crew List and 6 copies for distribution.

6 certified copies of Passenger List and 6 copies for distribution.

2 copies of Cargo Manifest and 25 copies for distribution.

4 certified copies of Stores/Provisions List and 6 copies for distribution.

3 sets of Bills of Lading.

NOTICE OF ARRIVAL: Radio Agent at least 24 hours before arrival advising date and time of arrival, number passengers disembarking, if any, amount of cargo to discharge in metric tons, number of gangs to work on board. This information is required by Port and Customs Authorities.

PILOTAGE: Pilots are available and compulsory, arranged by Agent. Signal for Port Captain and other officials is two long blasts.

MAX. SIZE: Length 500 ft., max. draft 26 ft.

RESTRICTIONS: Vessels bound for Caldera must first call at Puntarenas for clearance. Recommended that vessels not equipped with radar enter in daylight only.

ANCHORAGE: Vessels should keep Eastward of four submarine cables originating at Puntarenas where suitable anchorage may be found in 6-7 fathoms depth. Vessels should anchor as near the pier as safety permits to facilitate boarding by port officials.

HEALTH: Any vessel that enters this port has to be in possession of a Sanitary Manifest (Sanitary Maritime Declaration) signed by Captain of vessel. In case of any suspected disease or fever aboard, Captain to notify by radio to Port Authorities and vessel to wait outside the limit of territorial waters until clearance is given.

RADIO: Station call sign TIM, frequencies 8478 and 500 kc/s. Working hours 0400-1300 GMT.

TUGS: None available.

BERTHING: Vessels usually moor in daylight only. Unmooring night and day.

Muelle Nuevo: Pierhead runs East/West, connected to shore by 350 ft. gangway. One special heavy mooring line supplied from pier in addition to ship's ropes. Heavy surge experienced at the berth. Inner berth, length 107 m., max. depth 24 ft. Outside berth, length 147 m., max. depth 28 ft.

There are lighters available for hire for vessel working cargo at the anchorage.

Caldera Bay: Buoy mooring for tankers about 1,000 ft. offshore. Vessels moor using starboard anchor and lines to 3 buoys astern. Hoses connected on port side by ship's crew.

STEVEDORES: Available for work 24 hours a day.

MEDICAL: Facilities available at Puntarenas.

FRESH WATER: Available only from pier at Puntarenas.

FUEL: Not available.

IDENTIFICATION CARDS: Required.

TIME: GMT minus 6 hours.

TELEPHONES: No connection to vessels.

SHORE LEAVE: Allowed at Puntarenas, not allowed at Caldera Bay.

SHIPMASTER'S REPORT: September 1978

Anchorage: Vessel originally anchored in the area marked (Pilots) on Chart B.A. 1931, but subsequently moved in to a position with the Light on the Pier bearing 332°(T) – 9 cables and lay to the starboard anchor, 3 shackles, in 6 fathoms of water. Other ships and draft permitting, it is safe to anchor 5 cables off the pier.

This is a quiet, safe anchorage. A Pilot is not used arriving and sailing from the anchorage, but is compulsory if berthing.

Berthing: There are two berths on the pier. As the port was very congested, we remained at anchor.

Communications: With the Charter's Agents when at anchor, were by VHF, Channel 16. Long-range communication was by radio.

Documents: As per "Guide to Port Entry".

Cargo Work: Due to congestion, we waited 3.5 days to start work, although we only had a small quantity of cargo for discharge. When work did start, discharge was continuous and at a good rate.

I understand that ship's loading export cargo receive preference for labour.

Pratique: Granted on arrival.

Provisions: Available, but great care is necessary with regard to price and quality.

Fresh Water: Normally available only when alongside the pier. As we were very short of water by the time we had been in port for a few days, we managed to obtain a minimum supply from a tug. This can only be obtained as an emergency measure.

General: It was noted that the Light on the Pier was flashing letter "P" in the Morse Code and was not Gp. Occ. (4) as shown on the Chart.

Shore Leave: A launch service was arranged through the Agents for this purpose.

AUTHORITY: Comandante del Puerto.

NOTES

Please also advise Shipping Guides Ltd.

Cuba:

GENERAL:

DOCUMENTS: Required on arrival at *every* port:

12 copies Crew List
3 copies Personal Effects of Crew
3 copies Provisions and Stores List
3 copies Narcotics
3 copies Foreign Money List (to be sealed in safe)
Safety Construction Certificate
Safety Equipment Certificate
International Load Line Certificate
Radiotelegraphy Certificate
Tonnage Certificate
Derat Certificate
Ships Register.

Instructions for Master of Vessel: As to how to process Custom's Model Dirad-7, in connection with crew's money control and personal effects.

Custom's inspector when boarding the vessel besides carrying out their usual duties, should deliver to the Master duly legalized, as many of these forms as members of the crew are reported on Crew List.

Legalization of these forms consists of Customs Inspector's signature, customs stamps and consecutive numbering which indicates quantity of forms delivered to Master.

2. Ship's Master or Officer in charge should fill in only those spaces of the form as: Crew member's name, number of passport, as well as ship's name and date of arrival in port, on the first page of the card.

Besides amount of money delivered to the Crew member, date of delivery and signature must be shown as evidence that the Crew member has been provided with the money, with signature of the Master alongside, all of this information appears on page 2 of the form (card).

In case Crew member requires additional amount during vessel's stay in port, notation should be entered following the first, in same way.

3. No Crew members, except the Master, are allowed to come in or leave the Custom House premises without presenting this form to the Custom's Inspector at the gate, who will enter therein the pertinent notations.

All these forms legalized by Customs must be carefully kept for subsequent delivery to Customs upon vessel's departure, even those that might become useless.

Should a Crew member require more than 1 form because of that previously delivered having been filled up, or become useless, Master will give a new one which the Crew member will present, together with the previous one, to Custom's Inspector at the gate. Thereafter, notations should be entered in the new form, the previous one must be returned to Master for subsequent delivery to Customs.

If at any time more forms are required because those previously delivered have become exhausted, they should be requested from Ship Clearance Department of the Custom House, phone 61-8572. After 1800 hrs. these should be requested from Guard Room, phone 6-9698.

4. Upon ship's sailing, Master will gather all the forms from the crew, delivering same to Custom's Inspector who boards the vessel and will perform the following verifications:

(a) To see that none of the legalization forms are missing.
(b) To verify that such forms have no alterations, erasures, etc.
(c) To add up total spent by all Crew members and to verify it with amount settled with ship's Agents Consignatarias Mambisas.

5. Non-compliance with above instructions will subject the violator to corresponding penalty.

Director of Customs.

Shipmaster's Comment: One Crew List returned to vessel stamped by Customs /Immigration for next port.

HEALTH: Below is copy of warning sent to us by a ship's Master. The words in italics are the Master's comments.

National Veterinary Medicine Institute
Warning
Master:

You are kindly requested to comply with and acknowledge this warning regarding veterinary sanitary regulations and also to inform your Crew members of same.

One Green Vet. Form given to ship to take to next Cuban port, one copy for ship also.

1. Refrigerators of vessels which contain in their victuals meat and meat products originated in countries declared as being affected with foot-and-mouth disease, Rinderpest, Vesicular stomatitis, African swine fever and other diseases non existent in the Republic of Cuba, shall be sealed while remaining in our territorial waters.

Sealed.

2. Milk, butter, cheese, fish and poultry products, as well as canned meat, and meat and meat products from Australia, New Zealand and Canada, are not subject to this procedure for the time being.

All victuals of animal origin must be declared to the Frontier Veterinary Services Officer.

3. Prohibitions:

(a) Arriving in port with live food animals (cattle, swine, poultry, etc.) on board, unless duly authorised by the Animal Health Authorities of the Republic of Cuba;

If pets on board – not allowed ashore.

(b) Unloading or releasing of any species of pet animals. These animals (birds included) are subject to quarantine control on board;

(c) Unloading of victuals of whatsoever origin, including those not subject to sealing procedures;

(d) Arriving in port with compartments or receptacles containing garbage;

Dump rubbish at sea 6 miles out from Cuba.

(e) Scattering of garbage containing food scraps, portions or other wastes of animal origin, or throwing them overboard into the sea or onto shore.

Cover garbage drums.

4. Ratguards must be placed once the vessel has docked.

Fines if not done or if they fall off!

5. Footwear and clothing of the Crew members of ship coming from countries known to be affected with diseases dangerous to the fauna of the Republic of Cuba shall be subject to fumigation with formaldehyde gas.

6. Non-compliance of the sanitary regulations, or any action aimed to prejudice or evade them, shall be regarded as an offence liable to a fine of not less than $500.00 (Cuban Official Currency), or to the implementation, at the expense of the transgressor, of appropriate quarantine measures intended to minimise the consequences resulting therefrom.

The following is reproduced from a booklet given to Masters of arriving vessels. The booklet is produced by the Ships' Agent and dated 1973.

Comments are made throughout the text by the Master who supplied us with the booklet – such comments are reproduced in italics.

PORT REGULATIONS: In order that you may be properly informed, on not only Port and Cuban Government Regulations, but also on various matters related to the loading and/or discharging operations of your vessel, we wish to bring to your attention the following:

1. **Crew Regulations** (Important Notice to Masters)

(a) The Customs Authorities have put into effect new Regulations which the Masters of all vessels arriving at Cuban ports are under obligation to observe. The regulations in question are as follows:

First: The Master of the vessel is obliged to deliver to the Customs Authorities at the port of arrival the complementary documents to the Manifest, which comprise:

(a) List of crew belongings including objects property of each Crew member which he maintains on board for his use, such as, for instance, electric shaving machines, watches, radios, soaps, etc. *(4 copies required at every port – Declare everything in personal possession).* See "Shipmaster's Report".

(b) Detailed list of all articles transported by Crew members free of charge, including those which are for his use on board, or that may be destined to other persons, such as for instance perfume, umbrellas, dresses, ladies stockings and lingerie, cloth to make dresses, etc. *(4 copies every port – declare everything and place in bond.)*

(c) Foreign currency whether convertible or not, must be declared in the list of the Crew members' belongings and kept in the ship's safe as long as the vessel remains in port *(4 copies required every port – placed in ship's safe).*

Narcotics List – 4 copies morphine only. Provisions List – not listed but requested.

(d) Each Crew member must declare the articles referred to in paragraphs (a) (b) and (c) immediately upon vessel's arrival, since Harbour Officers may search the vessel at any time they should deem convenient.

Second: Each Crew member may keep in his cabin up to 200 cigarettes for a single time each day.

Third: The importation into, and the exportation from the Republic of Cuba of Cuban currency is forbidden, and no Crew member may have in his possession any amount in excess of that delivered to him by Master.

(Collected and sealed in safe).

Fourth: Each Crew member is allowed to have in his possession, only 1 of each of those above mentioned articles which are for his use on board. Any article in excess should be kept in the bond store.

Fifth: Any article not declared, or possessed by the Crew member in excess of the amount allowed, also Cuban currency not properly accounted for, and any foreign currency which he may have in his possession will be confiscated and should circumstances warrant, the courts of law will be informed, the latter having the right to impose penalties involving imprisonment of up to 6 years, or fines, depending on the value of the objects found in the Crew member's possession.

Immediately following the arrival of the vessel, the Master is under obligation to make these regulations known to each and every Crew member, as the Customs Authorities will consider that the Master and the crew have been put on notice as to what is herein provided at the moment the vessel has been cleared through Customs, insofar as concerns any violation of the above referred to regulations.

Masters are likewise required to provide a place or space sufficiently ample to deposit the articles transported by the crew free of charge or, in other words, those articles referred to in paragraph (b) above.

(a) Crew are not allowed to buy personal effects on shore.

(b) No Crew member or passenger of vessels arriving at Cuban ports from abroad is allowed to disembark until the vessel has been cleared by the Immigration Authorities.

(c) Crew members including Officers and Masters must be provided with immigration passes to go ashore. Upon vessel's arrival the gangway-inspector will deliver to each Crew member a pass and will at the same time pick-up his passport or seamen's book. At the time when the Crew member returns to the ship he will give the pass to the inspector who, in turn, will deliver the passport to the crew member.

Loss of the pass will result in a fine of $25.00.

(d) Owing to the repeated infringements on the part of Crew members of existing regulation covering shore passes, and the difficulties which such infringements bring about, the Provincial Chief of the Cuban Ministry of the Interior has issued Order No. 12, dated August 11th, 1971, establishing the following:

1. Shore passes for Crew members, including Masters, are only valid from 1800 to 2200 hrs. Infringements of this timetable will result in the impositions of fines as follows: *Suggest check about shore leave on arrival.*

1st infringement	US $25.00
2nd infringement	$50.00
For each subsequent infringement	$100.00

Note: Above fines are accumulative. For instance, if a Crew member infringes shore pass regulations for the first time, during a call of his vessel at a Cuban port and commits another infringement on a subsequent call, the latter is considered as a second infringement and fined accordingly, etc.

2. Shore passes are confined to the city limits of the port where the ship is lying, and each territorial infringement is subject to a fine of US $100.00.

2. **Sanitary Regulations**

(a) Following docking, Crew members are not allowed to go down to the pier to fix the rat guards or the gangway until the Sanitary Inspection (Free Pratique) has been completed.

(b) Thereafter, rat guards are to be kept in proper place in order to avoid fines (Authorities very strict with regard to this rule).

(c) Hereunder we copy Resolution No. 24 of the Direction of Customs dated June 30th, 1972.

Circular No. 16

For general knowledge and most strict fulfilment, Resolution No. 24 of the Direction of Customs is copied hereunder:

Whereas – Customs are obliged to fulfil and enforce local laws as well as International Conventions which Cuba has signed, among which are those related to International Sanitary Control, being of great concern to this Direction the dangerous carelessness of some National and foreign Masters who, when ships are docked, do not place rat guards on their mooring lines with docks or barges.

Whereas – The above represents a dangerous situation for the public health of our country and for our economy, which might result in the introduction into our country of epidemics such as bubonic pest or others transmissible by rats, which must be avoided by all means.

Therefore – Exercising the powers vested in me,

I Resolve:

First – Customs will take care that the ships have properly placed each and all of the rat guards on their mooring lines with dock and barges.

When it is detected that said rat guards have not been placed on some of the mooring lines with dock, the Chief of Customs of the Terminal should notify the Master that he shall be liable to as many fines as there are rat guards missing, according to law.

Second – Upon being served with the notice referred to in the preceding paragraph, the Master shall also be notified that if on subsequent days the rat guards are not placed, the Customs may impose a fine higher than the previous one.

Third – All dispositions contained in Resolution No. 73 of October 11th, 1965, made known by Circular No. 2 of June 2nd, 1970, and all of this Direction which oppose fulfilment of this Resolution are hereby cancelled.

Given at Havana on June 30th, 1972.
Director of Customs

(d) Vessels proceeding from countries affected by aphthous fever or bovine plague *(foot-and-mouth or swine fever)* are subject to fumigation including Crew members' clothes/shoes.

Veterinary Sanitary Control – Complete sealing of ships' refrigerators which contain dangerous victuals.

1. It is hereby instructed that the refrigerators of Cuban and foreign flag vessels which contain in their victuals meats and cattle products originating in countries affected by bovine pest, vesicular stomatitis, African pork pest and other animal diseases not existent in Cuba, must be completely sealed.

Exempt from the above are cattle products industrially canned, salted butter and cured cheese destined to be consumed only aboard ship.

2. To the end of this Circular, the following countries shall be considered clean or disease free: Canada, Japan, Australia, New Zealand, Ireland and Northern Ireland.

3. Only ships' refrigerators which contain victuals of animal origin shall be sealed. Compartments where vegetables and other victuals are kept, will not be sealed.

4. Ships' refrigerators will be opened once a day, under sanitary or Customs supervision to permit withdrawal of meat and cattle products. *(US $5.00 each time).*

5. Meats and other animal products purchased in Cuba must be so placed in the refrigerator that they will not enter into contact with similar products purchased abroad.

6. Sealing of ships' refrigerators will apply to vessels on berth as well as to vessels at anchorage.

7. Sealing must be performed in an effective manner. To this end, it is necessary to verify that it was done correctly; a sufficient enough depression of the seal which makes it impossible to withdraw the wire.

The breaking of the seal will result in a fine. Fines in the interior of the Republic will be processed by the Customs through Consignatarias Mambisas, copies of the resolutions to be forwarded to the Provincial Direction of Veterinary Sanitary Control.

8. From the date of this Circular, sealing procedures will be put into effect simultaneously in the port of Mariel, Havana, Matanzas, Cardenas, Nuevitas, Santiago de Cuba, Guayabal, Jucaro and Cienfuegos.

In the other ports of the Republic, it will be put into effect gradually, but in the least possible time.

VETERINARY SANITARY CONTROL
Border Service,
Havana, July 1st, 1971

3. **Labour Regulations**

In accordance with Resolution No. 298 of December 2nd, 1958, issued by the Cuban Labour Ministry, it is forbidden for vessels' crews, during their stay in port, to do work that should be performed by port labourers, such as loading or discharging, rigging booms, driving winches, (opening and closing hatches), cleaning holds, laying wood or paper dunnage, construction of stalls, etc. Therefore you should apply to us in writing, so that arrangements can be made for the necessary port labour to perform such work.

Please note that if any of the work described were to be done by ship's crew, port labourers must be paid as if they had actually performed the services.

(Ship's crew opened and closed Macgregor hatches).

4. **Bunkers**

Should your vessel be bunkering at this port, it is necessary that we be notified in advance, so that appropriate arrangements can be made not only with the local suppliers, but also to comply with government regulations, which provide that funds to cover the cost of bunkers be received from the Owners *or Charterers* prior to delivery. Since this procedure takes a few days, it is suggested that any request for bunkers be made with due anticipation.

When delivery of bunkers is to be made in the port of Havana, the order or requisition must be sent to the suppliers at least 2 days in advance of the desired date of delivery, and 3 days in advance when delivery is to be made at a port other than Havana.

5. **Galley Oil or Coal**

The above requirements for bunkers do not, of course, apply to galley oil or coal as this item, if needed, is to be purchased directly by the ship from a shipchandler.

6. **Cleaning**

In accordance with Port Regulations, this work must be performed by local shore labour. The cleaning work done by shore labour is limited to only the sweeping of cargo compartments. Port Regulations forbid the washing of the ship within the premises of the harbour. *(See Charter Party).*

7. **Garbage:** *(Vessel needed 10 drums).*

Port Regulations forbid the throwing of garbage on to the pier or into the sea while the vessel is within the harbour limits. Infringements of regulations which prohibit throwing garbage and refuse in the bay will be a fine of US $100.00 for the first infringement, and US $200.00 for each subsequent one.

All other infringements to be fined as already established.

The provisions of Order No. 12 to become effective from August 26th, 1971.

According to Sanitary Regulations vessels must arrive at each Cuban port of call with the garbage deposits or tanks empty. Any garbage must be thrown into the high seas at no less than 6 miles from the coast. Non-compliance of this regulation will be subject to a fine against the ship.

8. **Cash to Master** *(Owners must remit cash in advance).*

Cash advances authorised by Owners or Charterers will be supplied to the Master upon request. Such request is to be made during office hours and the money will be delivered at the Agent's place of business.

Upon completion of loading and/or discharging operations, any unused funds must be handed over to the Local Agent; in other words, money left over from a cash advance drawn at one port cannot be returned or used at any other port.

However, further cash advances may be requested at the next Cuban port of call.

9. **Damage to Cargo**

As you undoubtedly realise, it is necessary to establish with the utmost degree of accuracy possible with whom the responsibility for damage to cargo lies, whether for vessel's or stevedores' account. To ascertain this, the Terminals in Cuba employ Damage Inspectors to take note of all cargo that is found on board in damaged condition prior to its discharge from the ship, and the Master or Chief Officer is asked to sign in acknowledgement. Therefore, we suggest that in order to avoid unnecessary discrepancies between the vessel and the Terminal, and to properly protect the Owners' interests, you please instruct your cargo officer to coordinate his work in this connection with that of the Terminal Damage Inspector. Upon completion of discharge operations, the Terminal will submit to the Master for signature the relevant Survey Report and Outturn Report.

Should you note protest owing to bad weather whilst on voyage, 1 copy of the Note of Protest should be delivered to us for our records.

10. **Stevedore Damage to the Ship** *(Stevedores usually repair damage).*

Any damage caused to the vessel during the loading and/or discharging operation, should be reported immediately to the Head Discharging Foreman on the Terminal, followed by a written notice to us in duplicate. Such notice should be made out within 24 hours following the incident to allow sufficient time to make arrangements for the necessary repairs.

11. **Repairs for Vessel's Account**

Any repair work to be done for vessel's account must be requested in writing, sufficiently in advance of vessel's estimated departure in order to obtain from the repair shop the budget for the work, in the event of course, that the job can be done locally.

12. **Engine Repairs or Engine Overhaul while in port**

In the event vessel requires engine repairs or an engine overhaul (usually performed by the ship's crew) while berthed at a pier or dock in port, it is necessary that the Master so informs his Agents before undertaking such work in order that his Agents may, in turn, notify all parties concerned.

Read Charter Party/"Baltime" usually 24 hours notice for engine cleaning.

The reason for this is that it may be necessary to shift the vessel from one berth to another to facilitate or continue loading/discharging operations, and it is necessary to know in advance if the vessel can move with her own engines or whether tugboats will be required for the movement. In the latter case it is of course understood that the cost of tugboats will be for vessel's account.

13. **Redelivery**

If your vessel is to be re-delivered at this port, this should be made known to us as soon as possible after arrival here, for although we may be aware of this fact, there is a possibility we might be lacking the necessary details concerning the terms of re-delivery.

14. **Lowering Boats** *(Apply in writing)*

Port regulations prohibit the lowering of boats except for fire drill or to do maintenance work of the ship (painting, etc.). For either of those purposes, a permit is required from the Harbour Master, and the crews of such boats are not allowed to land on any pier or board any vessel in the harbour. Please be informed that our Ministry of the Interior has issued the following instructions to be strictly observed by the Masters of all foreign vessels during their stay at Cuban ports:

(a) when a vessel is carrying out paint work or similar tasks while in port, at the end of the day's work the craft or boat used to perform the work should under no circumstances remain in the water, but must be hoisted aboard to be again lowered the following day or whenever the work is resumed.

15. **Radio Communications**

Vessels within harbour limits are not allowed to transmit messages by radio.

16. **Port Expenses**

The bills covering port expenses will be submitted for your approval and signature, prior to vessel's departure from this port, regardless of the fact that such expenses might be for Owner's or Charterer's account, as this can subsequently be easily determined by examination of the Charter Party. However, if we are to obtain reimbursement for the amounts expended to cover port expenses, it is necessary that your approval and signature be secured.

Mark Owner's account or Charterers' account.

17. **Stowaways**

(a) Kindly request all ship's officers that every possible precaution should be taken to prevent stowaways.

(b) Whenever the Master of a vessel finds a stowaway on board, either in port or outside the port's limits but within Cuban territorial waters, he is under obligation to deliver same to the Immigration Authorities. If the stowaway is found outside the port, the Master must report this by radio so that the stowaway may be picked up by a port authority boat, to be subsequently delivered to the Immigration Authorities.

(c) At no time are the Masters of vessels allowed to lower rope ladders or ropes on the vessel opposite the dock where the ship is berthed.

18. **Paper and Dunnage – Very Important**

In the event that your vessel is scheduled to load sugar in bags in Cuba, and should you require paper and/or wood dunnage, you must make known to us your needs in writing as soon as possible, bearing in mind that the suppliers require at least (5) days notice for delivery.

19. **Loading Sugar**

Whenever your vessel is assigned to load sugar the following precautions are to be taken:

(a) Cleaning and Dunnaging of Hatches; You must be extremely careful to have the vessel's hatches thoroughly dry, clean and without odour, as well as properly dunnaged to the satisfaction of the shippers, before starting loading.

(b) Cleaning Holds: In order to avoid damage to the sugar cargo during the voyage, please make proper arrangements for the closing of holds before starting loading in 'tweendecks.

(c) Tally: With respect to the dispute that occasionally arises between the vessel and the shippers during the course of loading sugar shipments regarding the number of bags delivered on board, which results in the issuance of a letter of guarantee by the latter, in many instances without real justification, we wish to inform you that the only document with official validity is the tally sheet prepared by the shore tallyman assigned to each loading hatch, and that if you wish to verify the accuracy of said tallying it is necessary that you appoint an officer or a member of your crew to count the cargo jointly with the shore tallyman, as this is the only possible way of avoiding discrepancies in the checking of the bags actually delivered on board.

Consequently, we request that you please keep the above in mind, as this will tend to reduce if not completely eliminate, the problems which are now being confronted.

20. **Agency Office hours**

We list hereunder our office hours:
From Monday to Friday: 0800 to 1200, 1300 to 1700.
Saturday: 0800 to 1200.

Our representatives will call on the ship as regularly as possible to discuss with the Master any matter or problem he may have in connection with the operations of his vessel; however, such calls are contingent upon the volume of work, for which reason we suggest that the Master calls at our office when any matter arises which requires immediate attention.

VHF Communication System

The VHF (150 mc.) communication system is officially established between our Havana Agency and ships in port or close to port. For the time being, service will be provided during the Agency's regular office hours only, but this work schedule will be expanded in the near future.

It is hoped the establishment of this service will be instrumental in speeding up those operations in which we intervene.

Havana Pilot Channel 16. Agent's Channel 12.

21. **Crew Mail**

An Officer or Crew member should call at the office regularly to pick up crew mail; however, the mail will be sent aboard whenever possible.

22. **Medical and Dental Services**

Any man requiring medical or dental attention should be sent to our office whenever possible, with a letter from Master containing full name and rank, at 0800 or 1300 hrs. from Monday to Friday, and we will see to it that he is promptly sent in a car to the hospital and back to the ship afterwards.

In the event of an accident or serious illness, please contact Mambisas Agency on the phone, and an ambulance will be sent immediately to transport the man to the hospital.

Failure on the part of the ship to comply with the instructions herein contained, automatically relieves the Agent of any responsibility which non-compliance might bring about.

SHIPMASTER'S COMMENTS:

Fresh Water: Always take full fresh water. Water barges available at Havana and Santiago. No fresh water at Jucaro or Boca Grande.

Documents: Sample crew manifest to avoid confiscation. 2 Radios, packet of paints, tape recorder (Akai), gloves, speakers, star plotter, cassette tapes, set of plans ship, earphones, plastic mac, 3 prs. sunglasses, dress uniform, calculator, battle dress uniform, matchstick model ship, brown suit, plastic battleship model, blue coat, bridge coat, 10 packs glue, grey trousers, 1 pk. razor blades, 3 khaki shirts, 1 Fernox medicine, 1 Savlon cream, 3 khaki shorts, 3 balsa cement, 5 uniform shirts, 1 stop watch, 1 briefcase, 2 coloured shirts, 1 tee shirt, 1 knapsack, 6 uniform white shirts, 1 photographic bag, 3 white shorts, assorted films, 4 ties, 2 cravats, 1 brown cardigan, 1 pullover, 1 dressing gown, 1 pair longjohns, 1 pr. sandals, 2 alarm clocks, 1 sextant, 4 watches, 1 boiler suit, 3 plastic trays, 2 beakers, 1 belt, 2 toy engines, cellotape, 14 waggons, gold braid, 8 points, keys, 8 curved rails, tape recorder cords, 4 vests, swimming trunks, 5 pants, 1 blue socks, 5 brown socks, 6 white socks, 1 cap cover, 1 pr. pyjamas, 1 silk scarf, 1 pr. black shoes, 1 pr. brown shoes, toilet articles, 1 copy stand, 1 enlarger, assorted chemicals, powersaw, typewriter, calculator, adding machine, 4 packs tea, 4 cameras, 1 lens, 1 light meter, 3M duplicator, binoculars, Sanyo tape cassette, assorted perfumes and curios. 1 kitbag, 1 flip-flops.

200 cigarettes, 1 spirits, number cans of beer, number of bottles of wine.

If in doubt – put it in a suitcase and lock it in the bonded store!

ANTILLA (and sub-ports of Felton, Nicaro and Preston): 20.50 N. 75.44 W.

Port situated on North side of Nipe Bay, on North Coast of Cuba.

APPROACHES: Safe approach without sharp turns. Width of approach about 0.75 miles with mud bottom. Depth of water between entrance and Saetia anchorage about 150 ft.

PILOTAGE: Pilots board vessels proceeding to Antilla Port or to sub-ports of Preston, Nicaro and Felton, 1 mile N.E. of Punta Mayari Lighthouse.

All vessels proceeding to Antilla or to sub-ports must proceed to a position no more than 1 mile North of the Line East-West with Punta Mayari.

Lighthouse position: 20° 47′ 45″ N., 75° 32′ 00″ W.

Pilot station is at Saetia. There is a telephonic communication between Antilla and Saetia, though rather deficient. On many occasions it is impossible to communicate with Pilots when there is any sudden change in vessel's ETA. Therefore advise Antilla Agency soonest of any change in ETA.

Distance from position where Pilots board vessels to Antilla Piers is about 15 miles.

ANCHORAGES: Corojal, 14 miles. Can accommodate vessels drawing up to 20 ft. with a length up to 557 ft. Sufficient swinging area.

Punta Salinas, 10 miles. Can accommodate vessels drawing up to 31 ft. without length limitation.

Preston, 7 miles. Can accommodate vessels drawing up to 30 ft. without length limitation. Swinging area unlimited.

Saetia, 3 miles. Can accommodate vessels of any length and draft.

Cajimaya, 6 miles. Can accommodate vessels drawing up to 32 ft. with length up to 600/700 ft.

La Chiva, 5 miles. Can accommodate vessels of any length and draft.

RESTRICTIONS: Vessels can enter/sail only during daylight hours.

MAX. SIZE: Vessel of any length and draft can enter Antilla but only up to Saetia anchorage, where the mouth is about 0.75 miles wide with a depth of 150 ft.

Vessels must not enter or sail from this port with a draft more than 20 ft. forward, 23 ft. aft, as depth at piers limit draft either entering or sailing.

Length is limited by length of piers to 450 ft., otherwise one hatch would remain outside pier, which would result in delay loading or discharging.

There is an average of 3 ft. between high and low tides.

CLEARANCE: All Port Authorities, Port Doctor, Customs, Immigration and Captain of the Port have their offices at Antilla. Vessels may proceed directly to sub-ports without entering Antilla for clearance. Port Authorities clear ships at sub-port when necessary.

Launch service is the preferable means of transportation used by the Port Authorities to the various sub-ports under Antilla jurisdiction.

There are Custom House Delegations at sub-ports of Preston, Nicaro, but no Immigration. The Custom House Delegate at the sub-port of Nicaro also acts as Delegate for the Captain of the Port.

Although there is no Port Doctor Delegate at the sub-ports, the General Hospital Doctors may act as such, if requested, in order to give a quick entry to the ship.

Notwithstanding the above, in those cases when a ship is coming from a Cuban or foreign port, destined to Nicaro, and happens to lose the slack water tide, it will be necessary for the ship to anchor at Saetia (Antilla) and to wait the next tide. In these particular cases the Port Authorities give entry to the ship at Saetia anchorage, and it is not necessary for another Port Authority visit at the sub-port of Nicaro.

RADIO: When vessels proceed to Antilla, or to any sub-ports, Preston, Nicaro or Felton, or to the port of Banes, ETA messages should be sent to "Mambisas Antilla", simultaneously advising the main office, "Mambisas", Havana.

Ships can communicate with Mambisas Antilla's Agency by wireless via CLA.

TUGS: No tug is required for entry to Antilla. There is a tug available 24 hours of the day, but service must be requested at least 24 hours in advance. Name, *Macabi*; length, 81 ft. 1 in.; width, 24 ft. 0 in.; gross tonnage, 183.53; net tonnage, 86.00; motor, one diesel; h.p., 750; speed, 8.5 knots.

BERTHING: Pier No. 4 (North side). Length 458 ft. Can accommodate vessels drawing up to 17 ft. forward, 23 ft. aft, with a length up to 557 ft.

Pier No. 4 (South side). Length 458 ft. Can accommodate vessels drawing up to 20 ft. forward, 23 ft. aft, with a length up to 557 ft.

Coast Pier: Can accommodate vessels drawing up to 20 ft. even keel.

At these piers, operations of loading sugar and discharge of jute bags. Shipment of molasses can only be performed at No. 4 pier (North and South side) where there is a pipe-line of 16 in. diameter.

The three piers have railroad tracks of standard gauge. Each pier is connected with one railway which is independent of the others, but has no separate outlet at the end of the piers; consequently to perform any movement it is necessary to take out the remaining cars.

Operations at anchor in the bay cannot be performed, as there are no lighters or tugboats available.

STEVEDORES: Working periods – loading sugar; Monday to Friday – 0700/1100–1300/1700 hrs. Saturday – 0700/1100–1300/1700 hrs. Sunday – no work performed.

Labour legislation presently in force provides that the number of hours to be worked is 8 hours daily, from Monday to Friday, and 4 hours on Saturday, for a total of 44 hours weekly.

Capacity: Three ships can be performing sugar loading operations simultaneously, although the labour force available is for a total of 12 gangs.

1. Raw Sugar: *(a)* Loading rate: 1,330 bags of raw sugar (of the 220-pound type) per 4 hours per gang. *(b)* Bags per sling: 6 bags of raw sugar (of the 220-pound type).

2. Refined Sugar: *(a)* Loading rate: 2,100 bags of refined sugar (of the 100-pound type) per 4 hours per gang. *(b)* Bags per sling: 12 bags of refined sugar (of the 100-pound type).

No shore crane available at this port, but there are 6 machine throwers for bulk sugar operations, grates and canvas funnel, etc. These machines function with diesel motors.

Sugar bags are opened in the square of the hatch.

TANKERS: Molasses pumping rate is at an average of 35,000 gallons per hour.

Coast dock has been equipped by ECP for vessels to discharge gasoline and gas oil and where vessels can berth with draft 20 ft. even keel. Fidelity tanks, presently operated by ECP, one for storing gasoline and the other for gas oil.

Capacity of each tank about 53,000 barrels. Average discharging rate, each product about 300 t.p.h.

Due to the fact that there is only one pipe-line, when vessels carry both products gasoline is discharged first, after which the pipe-line is cleaned by pumping water. The gas oil is then discharged.

MEDICAL: There is a hospital where crew members may be hospitalised.

FRESH WATER: Can be obtained. The water is brought from outside in railroad tank cars and pumped to the ship by means of a portable turbine. Any amount of water can be delivered but only in partial quantities of not more than two tank cars daily. Average delivery: 30 t.p.h.

FUEL: Not available.

REPAIRS: Minor repairs only.

AGENTS: Attending the port of Antilla, and the sub-ports of Preston, Nicaro and Felton, also the port of Banes.

Agency Address: Empresa Consignatarias Mambisas, 55 Avenue de Cuba, PO Box 62, Antilla, Oriente, Cuba. Cables: "Mambisas" – Antilla. Tel. 39. Night No. 247.

Crew mail should be sent to Antilla Agency address, even when ships are operating in sub-ports, and sent by "Registered Mail" for quick delivery. Letters of instructions or cables from owners should be sent to the main office: "Mambisas", Havana.

SUB-PORTS:

Distance from Antilla to:

Preston (Guatemala), 7 miles.

Felton, 11 miles.

Nicaro, 14 miles.

To the port of Banes, which is attended by Antilla Agency, 50 km. From Antilla to Banes highway transportation is used.

Time from Antilla to:

Sub-port	*Launch*	*Highway*
Preston	1 Hour	1 hour 45 minutes
Felton	1 hour 30 minutes	2 hours 15 minutes
Nicaro	2 hours	3 hours

There is only a regular launch service from Antilla to Nicaro, leaving daily from Coastwise pier Antilla at 0930 hrs., arriving Nicaro at 1130 hrs.

(a) SUB-PORT OF PRESTON (GUATEMALA):

LOCATION: On North coast of Cuba, 20° 46′ N. 75° 40′ W.

This sub-port situated Eastern side of Nipe Bay on a peninsula called Punta de Tabaco, S.E. of Antilla. Sugar and molasses produced by the sugar mill Preston (Guatemala) are shipped through this sub-port.

APPROACHES: Same as for Antilla – (Nipe Bay) where Preston is located. The depth from the entrance to anchorage at Preston of about 150 ft., gradually decreases to 60 ft.

PILOTAGE: See "Antilla". Distance from the point where Pilots board the vessels and Preston Pier: 8 miles; to Preston anchorage: 7 miles.

ANCHORAGE/RESTRICTIONS: See "Antilla".

MAX. SIZE: It is not necessary for ships to wait for slack or favourable tide. At sub-port of Preston, ships cannot enter or sail with a draft exceeding 11 ft. forward, 20 ft. aft, as pier is continuously losing depth due to the quantity of mud that Mayari river deposits.

CLEARANCE: See "Antilla". Port Doctor, Immigration and Port Captain travel from Antilla to Preston to give ships entry. Custom Delegation at this sub-port, only occasionally, and in order to avoid delay Preston Hospital Doctor clears the ship.

Vessel can proceed directly to this sub-port, since Port Authorities come from Antilla to give ship's entry.

RADIO: See "Antilla".

TUGS: See "Antilla". No tug required for ships to enter this sub-port. No tug available, but can be obtained from Antilla.

BERTHING: Wooden Pier (West side only) where vessels can be accommodated drawing up to 11 ft. forward and 20 ft. aft. This dock has about 1,100 ft. length, but the first 600 ft. (starting from shore to the head) is only about 12 ft. depth; from there on, draft for loading is 11 ft. forward and 20 ft. aft.

Only one vessel can be berthed at this pier on West side. It is usually used only in loading sugar and molasses, and occasionally for discharging coastwise fuel oil for sugar mill consumption.

The pier has double railroad track of standard gauge which reaches to its end, but for performing any movement it is necessary to take out the remaining cars as there is no outlet at the pier's end.

No dry cargo discharging is carried out, and no cargo operations are conducted in the bay.

STEVEDORES: Loading sugar – working period (max. 4 gangs). Monday to Friday: 0700/1100–1300/1700 hrs. Saturday: 0700/1100–1300/1700 hrs. Sunday: No work is performed.

General cargo: No discharging operation is performed at this port.

Labour legislation presently in force provides that the number of hours to be worked is 8 hours daily, from Monday to Friday, and 4 hours on Saturday, for a total of 44 hours weekly.

Raw sugar-loading rate. About 1,330 bags of raw sugar (of the 220-pound type) per 4 hours per gang.

Bags per sling: 6 bags of raw sugar (of the 220-pound type).

Operational capacity. At this sub-port only one vessel at a time can be operated.

Refined sugar. No refined sugar has been shipped by this sub-port.

Equipment. There is one movable shore crane available with lifting capacity of about 60 tons with 75° boom inclination. Boom length 50 ft. Crane is mounted on a railroad flat car which is acted by means of steam supplied by an adapted boiler. As the greater part of the year this crane remains idle, it is possible that its lifting capacity might have decreased. Five grates, but no thrower machines.

TANKERS: Molasses pumping rate average of 75,000 gallons per hour.

MEDICAL: There is a hospital at Preston which offers very good service to ship's crew. In cases requiring special attention, patients can be taken to Holguin, where there are reliable specialists.

FRESH WATER: Can be supplied to vessels. Pier has a 2 in. diameter pipe-line, through which water is delivered directly to ship, at an average of about 30 t.p.h. Any quantity of water can be supplied.

FUEL: Not available.

REPAIRS: A good repair shop operated by the sugar mill "Central Guatemala".

AGENTS: See "Antilla".

(b) SUB-PORT OF NICARO (LENGUA DE PAJARO) LEVISA BAY:

LOCATION: North Coast of Cuba in province of Oriente, 19° 43′ N. 75° 33′ W.

APPROACHES: Entrance Channel for sub-port of Nicaro is risky for vessels over 350 ft. length, due to its narrowness and because of having sharp turns, some of them forming angles of almost 90°. Bottom and banks are rock and coral.

Depths – 170 and 78 ft. max./min. respectively. Vessels exceeding 350 ft. length require tug for entering and sailing; all vessels over 450 ft. must be extremely careful. Entering or sailing must be effected during slack water, high or low. Simultaneous entry or sailing of two or more vessels is not permitted.

PILOTAGE: See "Antilla". Distance from the point where Pilot boards vessel and Nicaro anchorage, about 10.50 miles; to Nicaro Pier, about 11 miles.

ANCHORAGE: Can accommodate vessels with length up to 475 ft. and max. draft up to 30 ft. The swinging area is limited to 800 ft. to permit access through the Channel.

RESTRICTIONS: At sub-port of Nicaro, vessels not permitted enter or sail during night time. From beginning May until end August vessels can enter Nicaro from 0515 hrs. to 1800 hrs. and sail from 0550 hrs. to 1840 hrs. From end August to beginning May, vessels can enter from 0615 hrs. to 1720 hrs. For sailing from 0620 hrs. to 1810 hrs.

In the above information, the time taken (1 hour, 20 minutes) to undock from pier and manoeuvre to entrance of Channel, and vice versa, has been included.

MAX. SIZE: Permissible draft at North side of Nicaro pier at low tide must not exceed 27 ft. 6 in. forward and 29 ft. aft, with max. length not over 476 ft.

South side of Nicaro Pier, at low tide, has depth of 25 ft. towards shore and 28 ft. at its end, showing the marks for 26 ft. at a distance of 450 ft. from head of pier up to its end.

Both sides have muddy bottom about 3 ft. deep. Nicaro was dredged up to 32 ft., not having been dredged since that time. As a consequence of unloading of mineral (anthracite) which is carried out in this sub-port, anthracite can be discharged only at South side of pier, where crane is situated; a great quantity of mineral is deposited on the bottom, mainly close to piling which supports the pier plate. Owing to this, it is believed that there is an elevation of mud and coal which extends alongside of pier from the 50 ft. mark to 380 ft.

Because of this elevation, which forms an incline from stack pile of the pier, up to approximately 1.5 m. out, vessels which submerge more than 26 ft. forward and 27 ft. aft tend to list to port.

Between months of August and December, variation of tide is from 3 ft. to 3.5 ft. During remaining months it is from 2.5 ft. up to 3 ft.

Also see "Approaches" and "Anchorage".

CLEARANCE: Vessels are cleared by a doctor of the Nicaro General Hospital. Immigration officials come from Antilla together with the Agent and Customs Inspectors.

Vessels proceeding to Nicaro can do so directly without having to call Antilla for Port Authorities' Clearance.

Vessels unable to proceed direct owing to unfavourable tide or night arrival are required to anchor at Saetia or Salinas. In such cases, and when ordered by the Chief Inspector, clearance on entry is carried out at these anchorages.

RADIO: Nicaro has following means of communication: telephone, post office, telegraph and radiograms via R.C.A. Ships can communicate with Nicaro using C.L.A., but it is suggested that ETA messages be sent simultaneously to Mambisas, Antilla, and Mambisas, Havana.

Also see "Antilla".

TUGS: Obtained from port of Antilla. Therefore it is recommended that when vessels are assigned to this sub-port, advice of their ETA be given with sufficient time prior to vessels' arrival. Particulars of tugboats are shown under "Antilla" information.

BERTHING: Nicaro Pier operated by Empresa Consolidada Nickel Industria Minera "Commandante Rene Ramos Latour", where following operations carried out: Sugar loading from mills Guatemala and Nicaragua; shipment of nickel; and also discharging general cargo, fuel, oil, ammonia and coal.

At North side of pier are two intakes for fuel, oil, one for ammonia and one for gas oil.

Liquid fuel can be discharged at South side of pier, but this operation prohibits any other operation being carried out at opposite side of pier, as hoses have to cross over pier from the vessel to connections situated at North side.

Pier has a railroad track of standard gauge. Truck transportation can also be used. Interruptions are experienced (mainly sugar loading) since there is only one railroad track. Operation of change and movement of flat cars takes approximately 10 minutes.

In discharging mineral coal, no interruptions occur and time is not lost.

Electric shore crane is installed at South side of pier and mounted on rails which run from one end to the other. The top end of this crane consists of a rotary structure from which is projected a boom about 50 ft. long. This boom can be suspended up to an angle of about 60°. In a horizontal position, it can lift weights of about 10 tons each and the loading capacity is gradually increased to 20 tons while raising the boom up to an angle of 45°.

Crane can also perform discharging operations on vessels which are docked on the North side, but operations are slower than when vessels are docked at South side.

Crane's accessories consist of two grabs for mineral coal of 1.5 and 3 tons capacity each, steel slings, special slings for loading nickel,etc. This equipment (excluding ship's tackle) is the only gear available for loading or discharging at this sub-port.

Only two vessels can be loaded simultaneously, and operations of working two vessels simultaneously delays both operations owing to characteristics of this pier, which was constructed specifically for receiving mineral coal, general cargo, fuel, oil, ammonia, and to ship nickel or other type of heavy material. Pier lacks necessary railroad tracks to ship sugar as are found in other ports which have been assigned to this purpose.

No cargo operations are carried out in the bay.

STEVEDORES: Loading or unloading of general cargo, nickel, mineral coal, etc., is performed by port workmen of sub-port of Nicaro.

Raw sugar-loading rate. At present, average loading rate in a period of 4 hours per gang, is about 1,330 bags.

Bags per sling (Guatemala sugar): 6 bags of raw sugar (of 220 pound type) per sling. Nicaragua sugar: 6 bags of raw sugar (of 220 pound type) per sling. Sugar bags from sugar mills Guatemala and Nicaragua are transported from respective mills to Nicaro in railroad flat cars, already slinged.

Refined sugar. No refined sugar is exported.

General cargo discharging rate. General cargo of a fragile nature and careful handling: about 5 tons per gang hour. General cargo of sturdy nature and easy handling about 20 tons per gang hour.

Bagged cargo: about 30 tons per gang hour.

Mineral coal: at present the shore crane is averaging 110 t.p.h.

Nickel: at an average of 800 bags (26 tons) per gang hour.

Bulk sugar: no bulk sugar equipment available. In those cases when bulk sugar operations are performed, the necessary equipment is obtained from sub-port of Preston.

Working periods in loading sugar: Monday to Friday, 0700 to 1100 and 1300 to 1700 hrs.; Saturday 0700 to 1100 hrs. only; Sunday, no work is performed.

Labour legislation presently in force provides that the numbers of hours to be worked is 8 hours daily, from Monday to Friday, and 4 hours on Saturday, for a total of 44 hours weekly.

TANKERS: No molasses or alcohol re-loaded. Only fuel oil, liquid ammonia and gas oil are discharged. Average discharging of fuel oil at present is about 400 t.p.h. Liquid ammonia discharge averages about 27 metric t.p.h.

MEDICAL: Hospital at Nicaro offers good service to ships' crew members. In case of special attention, the patient can be taken to Holguin, where there are reliable specialists.

FRESH WATER: Delivered at North side of pier through pipe-line at average 30 t.p.h. Delivered only during night time.

FUEL: Not available.

REPAIRS: Very minor repairs only.

DISTANCES: The nautical distance between Nicaro and Antilla for vessels drawing over 6 ft. draft is 24 miles. For small craft drawing less than 6 ft. the distance is 14 miles. By highway, 130 kms. from Nicaro to Antilla.

Sea transportation takes 1 hour 45 minutes, and highway 2 hours 30 minutes. There is a daily launch service between Nicaro and Antilla. Launch leaves Antilla 0930 hrs. arriving at Nicaro at 1130 hrs. and a launch leaves Nicaro at 0930 hrs. arriving at Antilla at 1130 hrs.

AUTHORITY: Sub-port of Nicaro is under Antilla Custom House jurisdiction. There is a Custom House Delegate at this sub-port, who acts as a Delegate of the Captain of the Port.

Vessels at Nicaro are handled by personnel of Antilla offices who visit Nicaro, and are located at Oficina de la Marina, Tel. 216. In case this office is closed, these personnel could also be contacted through Customs House telephone of Nicaro.

AGENT: See "Antilla".

(c) SUB-PORT OF FELTON:

LOCATION: This sub-port lies about 3 miles to East of Preston, and about 1 mile to East of mouth of Mayari River.

APPROACHES: See "Antilla".

PILOTAGE: See "Antilla". Distance from point where Pilot boards to Felton Pier, 6 miles; to Cagimaya anchorage, 5 miles.

CLEARANCE: Vessels can proceed directly to Felton, as Port Authorities from Antilla are taken by launch to visit vessel at Felton pier, or at sea in Cagimaya Anchorage.

RESTRICTIONS: No entry or sailing at night.

MAX. SIZE: Vessels of any length and draft can enter, but due to depth at pier they are limited to max. 25 ft. forward and 26 ft. aft. It is recommended that ships not exceed 480 ft.

It is not necessary for ships entering Felton to wait for slack water.

There is a variation of 3 ft. between high and low tides.

RADIO: Ships can communicate with Felton by wireless via CLA, but it is recommended that ETA messages be given to Mambisas Antilla and simultaneously Mambisas Havana.

The means of communication between Felton and Antilla are telephone and telegraph.

BERTHING: No wharf. Vessel is secured to 3 dolphins about 40 ft. from shore. Distance between end dolphins, about 350 ft. Loading of manganese is by crane grab, and loading rate about 200 metric t.p.h.

There is one electric shore crane mounted on rails with a loading capacity of about 10 tons. This crane is movable and has wide field of operation. The booms have a length of 60 ft. If the grab is removed, the crane can lift up to a max. of 15 tons.

Loading manganese continues throughout 24 hours and 7 days a week.

Discharging operations consist of bulk fertilisers and fuel oil.

No cargo operations conducted in bay.

MEDICAL: No hospital available at Felton. Sick crew members are sent to Nicaro Hospital or to Hoguin.

FRESH WATER: Can be supplied, but it is recommended that requisition be made sufficiently in advance in order to store required amount in aqueduct tank. Any quantity can be supplied depending on time vessel remains in port. Average pumping rate about 20 t.p.h.

Delivered by pipe-line.

FUEL: Not available.

REPAIRS: Mechanic shop operated by mining industries, in which light work can be performed.

DISTANCES: Distance between Felton and Antilla is about 11 miles. Usual transportation is launch service. It takes about 1 hour 30 minutes from Felton to Antilla. No daily transportation between Felton and Antilla.

AUTHORITY: The Port Authorities are located at Antilla and visit Felton as necessary.

AGENTS: See "Antilla". Mail should be sent through Antilla's main office by registered mail. Spares by railway express to Antilla.

BANES: 20.54 N. 75.41 W.

PILOTAGE: Vessels should pick up Pilot at 20° 53′ N., 75° 29′ W., 1 mile N.E. of Banes Canyon Lighthouse. Pilot station located at Embarcadero (Banes). Agent informs Pilot of ship's arrival by means of local telephone. Distance from point where Pilot boards vessel to pier is about 6 miles.

RESTRICTIONS: Entrance is through narrow channel with sharp turns where there is a strong current. For this reason vessels can only enter on slack water tide and during daylight. Assistance of tug necessary for entering and sailing. Bottom and banks are rock and coral. Depth about 60 ft.

MAX. SIZE: Max. length due to characteristic of channel is of 360 ft. Due to insufficient water at pier, and in bay, ships are limited to draft 19 ft. forward and 23 ft. aft.

Average of about 2 ft. 4 in. between high and low tides.

TUGS: At present no tug available, but when needed same is requested from Antilla. Particulars of tug shown under Antilla information.

RADIO: Ships can communicate with port by wireless via CLA, but recommended that ETA message be sent to Antilla Agency, simultaneously advising Mambisas Havana.

MEDICAL: There is a hospital where sick crew members may be hospitalised.

BERTHING: Nicaragua Pier is only one for shipping sugar. Through same pier molasses are exported by 16-in. pipe-line with 2 connections. Fuel oil also discharged at this pier through 22-in. pipe-line. Vessels always dock portside to pier.

Pier has 7 railroad tracks which reach end of pier, but no outlets at other end and when performing any movement, remaining flat cars must be taken out. 5 tracks used for loading sugar in forward hatches; remaining 2 supply sugar to after hatches. This work performed by means of overhead electrical crane which can move along pier with max. 5 slings. Slings are laid on pier and hoisted by ship's tackles.

No cargo operations performed at anchorage.

STEVEDORES: General cargo: No discharging operations performed at this port.

Raw sugar — Loading rate: 980 bags of sugar (of the 250-pound type) per 4 hours, per gang.

Bags per sling: 6 bags of raw sugar (of the 250-pound type) per sling.

Operation capacity: Only one ship can operate at one time.

Refined sugar: No refined sugar shipped by this port.

Bulk loading equipment: No thrower machines for bulk sugar, only 4 grates which are placed on square of hatch.

Working periods — loading sugar: Monday to Friday, 0700 to 1100 – 1300 to 1700 hrs., Saturday, 0700 to 1100 – 1300 to 1700 hrs.: No work performed on Sunday.

Labour legislation presently in force provides that the number of hours to be worked is 8 hours daily, from Monday to Friday; and 4 hours on Saturday, for a total of 44 hours weekly.

FUEL: Not available.

FRESH WATER: Fresh water supplied, delivered by 3-in. diameter pipe-line, with average delivery 4 t.p.h.

REPAIRS: Sugar mill Nicaragua has machine shop which can carry out light repairs.

AUTHORITY: All port authorities located at this port.

AGENT: See "Antilla".

For information regarding ship's operations, Antilla Agency should be contacted. Antilla office personnel travel to Banes to attend vessels operating there. Any mail should be addressed to Antilla Agency. Spare parts by railway express.

BARACOA: 20.21 N. 74.30 W.
(Sub-ports: Moa and Punta Gorda)

LOCATION: Situated on North coast and extreme East of Cuba in Oriente province.

PILOTAGE: Pilots board vessels 2 miles off port. Pilot station located in Baracoa City. Distance from point where Pilots board vessels to operation place (anchorage) is about 2 miles.

RESTRICTIONS: Vessels can enter port only during daylight.

MAX. SIZE: Entrance channel straight – without turns. Vessels up to 400 ft. length and 28 ft. draft can enter through Channel Two to 3 ft. rise of tide.

TUGS: Not available.

RADIO: Vessels can communicate with Baracoa by radio through Havana and Santiago de Cuba.

STEVEDORES: No pier at this port. Vessels anchor in bay for operations. Several barges, capacity 100 tons.

Working periods: Monday to Friday 0700/1100–1300/1700 hrs.; Saturday 0700/1100–1300/1700 hrs.

Labour legislation presently in force provides that the number of hours to be worked is 8 hours daily, from Monday to Friday, and 4 hours on Saturday, for a total of 44 hours weekly.

Discharge rate: about 80 tons daily per gang.

MEDICAL: There is a general hospital for sick crew.

FUEL/FRESH WATER/REPAIRS: Not available.

AUTHORITY: Port Authorities located at Baracoa. They have Delegation at Sub-port of Moa.

AGENTS (Sub-agency): Empresa Nacional de Cabotaje, Calle 1ro. de Abril No. 14, PO Box No. 27, Baracoa, Oriente, Cuba. Cable: "Simon Baracoa".

When needed to obtain information regarding ships operating at Moa or Punta Gordo, sub-agency at Baracoa should be contacted. When office closed, telephone number 81 should be called.

SUB-PORT OF MOA (Moa Bay): 20.41.15 N. 74.52.30 W.

Vessels can proceed directly to sub-ports of Moa and Punta Gorda where they are visited by Customs Authorities.

APPROACHES: Entrance Channel is straight and bottom is sandy. At both sides of entrance there are reefs and shoals.

PILOTAGE: Pilots board vessels at Moa Port mouth which is distant about 2 miles from entrance. Pilot station located at Punta Gorda at distance of about 5 miles from port entrance. Distance from point where Pilot boards vessel to Darsena de Moa (pier) is about 4 miles; to Moa Anchorage about 2 miles.

RESTRICTIONS: Vessels can enter and sail from this sub-port only during daylight.

MAX. SIZE: Vessels can enter through Channel up to Moa anchorage drawing up to 40 ft. and with length of 600 ft., but for docking at Moa pier, cannot enter with a draft over 28 ft. 6 in., and length of over 500 ft. At high tide vessels can enter drawing up to 30 ft.

Tidal variation: about 3 ft.

TUGS: Tug used at Moa for docking. Tug operated by Mining Enterprises.

RADIO: Government Radio Station at Moa with communication to Baracoa. At Baracoa there are long-distance telephone communications as well as Inalambrica service.

BERTHING: Only one pier (La Darsena) where vessels drawing up to 28 ft. 6 in. and with a length of about 500 ft. can be accommodated. This pier is used for discharge of raw material for the nickel plant and fuel oil, also for loading nickel.

No cargo operations in the bay.

STEVEDORES: Generally work is performed from 0700 to 2300 hrs.

Cranes: Several types of cranes: Bucyrious, Eric and Manitowk which have lifting capacity of about 75 tons.

Loading/discharging operations: Raw material for the nickel plant is imported as well as fuel oil. Nickel concentrate is exported.

Loading/discharging rate – Nickel (in containers): loaded at a rate of approximately 30 tons per hour-gang.

Sulphur: Discharging about 1,200 tons in the period from 0700 to 2300 hrs.

Fuel oil: Discharged at an average of about 3,200 b.p.h.

MEDICAL: Industrial Hospital where crew members can be hospitalised. General Hospital at Baracoa.

FUEL: Not available.

FRESH WATER: Delivery at rate of about 15 t.p.h.

REPAIRS: There are machine shops at nickel plant where small emergency repairs can be performed.

AUTHORITY: Port Doctor, Customs and Port Captain Delegations at this sub-port. Immigration Delegate is the same one who attends vessels at Baracoa and other sub-ports. Vessels can proceed directly to Moa where they are cleared, by Port Authorities. Means of transportation from Baracoa to Moa or other sub-ports are: air, launch and overland (jeep). Customs House inspectors travel from Moa to Baracoa.

Baracoa to Moa about 32 miles distant. Following services used: by plane, 20 minutes; by launch, 6 hours; by jeep, 5 hours. No regular services.

AGENT: See "Baracoa".

When vessel at sub-port of Moa, instructions should be given through Baracoa Sub-agency (cable address: "Simon" Baracoa).

SUB-PORT OF PUNTA GORDA: 20.38.30 N. 74.51.15 W.

APPROACHES: Entrance Channel for Punta Gorda same as for Moa Channel, continuing to Punta Gorda, but following a winding course.

RESTRICTIONS: Vessels can enter only during daylight.

PILOTAGE: Pilots board vessels at Moa port mouth. Pilot station located at Punta Gorda at a distance of about 5 miles from port mouth.

Distance from point where Pilot boards vessels to the anchorage (loading place) is about 4.5 miles.

MAX. SIZE: Max. draft permitted, 28 ft. and length not exceeding 440 ft. Tidal variation, 3 ft. max.

TUGS: One tug which tows 1 or 2 barges as necessary. Work performed day and night.

RADIO: Through Simon – Baracoa by Inalambrica (cable).

LOADING: Anchorage where vessels can load up to a max. length of 440 ft.

STEVEDORES: Chrome, at average loading rate of 1,000 tons (approx.) per day of 24 hours. Loading operations carried out at anchorage. There are 4 barges which have total capacity 600 tons.

MEDICAL: No hospital at Punta Gorda. Crew members can be attended to at Moa or Baracoa Hospital.

FUEL/REPAIRS: Not available.

FRESH WATER: No water available but can be supplied at Moa pier (Darsena).

AUTHORITY: Customs Delegation at this sub-port. Vessels can proceed directly to Punta Gorda. Port Authorities from Baracoa travel to Punta Gorda for clearance. Moa Port Doctor clears vessels at Punta Gorda. From Baracoa to Punta Gorda, following ways of transportation used: air, launch and overland, which takes 20 minutes, 5 hours and 4.5 hours respectively. No regular transportation.

AGENT: Baracoa Sub-agency personnel attend vessels operating at Punta Gorda.

Instructions from Havana should be given through Baracoa Sub-agency (cable address: "Simon" Baracoa).

CAIBARIEN: 22.32 N. 79.28 W.

Operations carried out at Cay Frances anchorage by lighters, at distance of 16 miles from City of Caibarien.

PILOTAGE: Pilots board vessels 0.5 mile from Catalina buoy (entrance) of Cay Frances anchorage. Pilot station located at Cay Frances at place known as Punta del Asta. Usual means of communication is radio-telephone, which is available at Port Captain's Office in Cay Frances, close to pilot station. Advice also given by motor-launch.

Distance from point where Pilots board vessels to:

Inner anchorage (La Caldera) – 2 miles
Outer anchorage (La Poza) – 0.5 mile
Outer anchorage (Port Buoy) – at same place where Pilots board vessels.

ANCHORAGES: Cay Frances anchorage easily accessible, free of shoals and reefs. Bottoms at anchorage "Caldera" and "Poza" are mud and sand. Bottom at third anchorage (port buoy anchorage) is stone, but free of reefs.

Vessels can enter or sail Cay Frances anchorage with any length and with max. draft up to 35 ft. When vessels draw less than 20 ft. they proceed to inner anchorage (La Caldera): over 20 ft. and up to 26 ft. to the outer anchorage (La Poza); and those over 26 ft. proceed to third anchorage (port buoy).

Following regulations must be observed during vessels stay at Cay Frances road:

(1) Vessels arriving with draft of 19 ft. 6 in. or less:
(a) All ships arriving with draft of 19 ft. 6in. or less must proceed to inner anchorage and remain in this anchorage until reaching draft of 20 ft. even keel.
(b) Any Master refusing proceed to inner anchorage with draft of 19 ft. 6 in. or less, incurs penalty of extra charge of about 7 cents on each bag of sugar delivered in port (payable to crew of sugar barges employed in transportation of cargo from shore warehouse to anchorage at Cay Frances).

(2) Shifting or changes of anchorages:
(a) Vessels must remain at place where official Pilot orders anchoring.
(b) Not permitted to shift or change from place indicated by official Pilot of the port without authorisation from Custom House Officer-in-charge on board the vessel. All shifts and changes to be done only under supervision and command of local Pilot.
(c) Master will notify Custom House Officer on board when shiftings or changes of anchorages places required.

In event aforementioned orders not followed or observed by Ship's Master and/or ship's officers, a penalty or fine min. $500 (five hundred dollars) will be charged to the vessel, and will have to be paid by Master prior to departure from this port. Besides penalty, no cargo will be delivered to ship anchored in any other place, other than indicated by local Pilot.

Vessels can enter during day and night-time.

TUGS/BARGES: It is not necessary to use tug for entering/sailing, but following tugboats which used for towing barges.

Tug Name	*Length*	*Speed*	*H.P.*
Gonzalez Lines	75 ft.	8/9 kn.	250
Cmdte. Fajardo	55 ft.	8/9 kn.	300
Jose Marti	60 ft.	8/9 kn.	180

BARGES: Following barges available:

Name	*Capacity Bags*	*Capacity Approx. Long Tons*
Transporte No. 1	2,860	328
Transporte No. 4	2,860	328
Transporte No. 3	2,860	328
Transporte No. 8	2,860	328
Transporte No. 10	2,860	328
Transporte No. 11	2,860	328
Patana Punta Alegre No. 1	2,860	328
Patana Cadagua	2,860	328
Patana Victoria	2,860	328
Patana Americana No. 2	3,640	417
Patana Miriam Lourdes	2,080	240
Lanchon Antonio	2,080	240
Lanchon Marcelo	2,080	240
Lanchon Emilio	2,080	240
Lanchon Armando	2,080	240
Lanchon Dolores	1,040	120
Lanchon Juanita	1,040	120
Lanchon Laura	845	97
Lanchon Marianela	845	97
Lanchon Gloria	715	82
Lanchon Elvira	680	78
	45,945	5,163

STEVEDORES: Sugar working periods: Monday to Friday 0700 to 1100 hrs. (presently labourers continue working from 1200 to 1600 hrs. but the official periods are from 0700 to 1100 hrs.). Sunday, no work is performed unless urgent.

Loading rate: About 1,000 bags of raw sugar per gang-period. For each gang, not less than 1,950 bags are placed alongside vessel for each 8 hours working period.

For vessel able to make faster reception, it is possible some days for about 3,000 bags to be loaded.

Bags per sling: 5 bags per sling loaded.

Work capacity: 2 vessels can be operated simultaneously.

General cargo: Only empty jute bags imported and discharging rate approx. 20 tons per gang hour.

TANKERS: Only blackstrap molasses exported by this port. When tankers arrive drawing less than 20 ft. or in ballast, they dock at Pontoon or Hulk *San Pascual*, proceeding generally to complete at another port.

On other occasions they are shifted from Pontoon (Hulk) *San Pascual*, to outer anchorage "La Poza" where they complete cargo which is delivered by barges.

Average pumping rate 55,000 gallons per hour.

RADIO: Vessels can communicate with Caibarien through government Wireless Telegraphy Station but it is safer and quicker for any communication from vessel to be given through radio-telephone.

For use of wireless telegraphy, service of Inalambrica is preferable.

Means of communication between Caibarien and Cay Frances: radio telephone.

Following tugs equipped with radio telephone: Comandante Gonzalez Lines, Comandante Fajardo and the motor launch *Yolanda*. Also radio telephone at Pontoon (Hulk) *San Pascual* and at Port Captain's Office.

All tugs and motor-boats equipped with radio-telephone and communicate with Port Captain's Office are Caibarien and Empresa

Consolidada de Terminales Mambisas. Official hours of communications are 0800, 0900, 1100, 1400, 1530 and 1600 hrs. After these hours, other communications can be made when needed, upon request.

At Caibarien are following means of communication: National Wireless Telegraphy, Inalambrica, long-distance telephone and Post Office. Services are from 0800 to 2000 hrs. Telephone service is permanent.

MEDICAL: There is a hospital at Caibarien for sick crew members.

FRESH WATER: Any amount of fresh water can be supplied by means of barges which are towed from Caibarien docks to Cay Frances anchorage. Barges are equipped for this purpose. Average rate of delivery is about 5 t.p.h.

REPAIRS: Minor repairs only. Repair shops at Caibarien, but due to distance from Caibarien to Cay Frances, it is difficult and expensive to perform repairs.

AUTHORITY: All port authorities located at Caibarien 16 miles from Cay Frances anchorage, where they travel by launch or motor-boat to clear vessels.

AGENT: Empresa Consignatarias Mambisas, Street 4 No. 305 (2nd floor), PO Box 72, Caibarien, L.V. Tel.: 3-1805 from 0700 to 1900 hrs. (night: 3-4785).

CARDENAS: 23.03 N. 81.12 W.

PILOTAGE: Pilots board vessels in vicinity of Cayo Piedras.

Pilot station at Cardenas. Distance from where Pilot boards to the pier is 16 miles, and to Cayo Diana 6 miles.

APPROACHES: Cardenas Channel in bay has muddy bottom. Exterior Channel has rocky and sandy bottom, is artificial Channel, no dangerous narrows.

MAX. SIZE: Official draft for port 20 ft. 6 in., but due to quantity of mud deposited in Channel, Pilots have advised that vessels are only permitted enter and sail with draft not over 19 ft. and length approximately 560 ft. Variation of approximately 2 ft. between high and low tides.

RESTRICTIONS: Vessels only permitted enter or sail from port during daylight. Channel entrance to berth, 3 hours steaming, therefore vessels must enter or sail at least 3 hours before sunset.

ANCHORAGES: *Cayo Piedra de Afuera Anchorage:* Outer anchorage. Max. draft 38 ft. Swinging area over 500 ft. Open to winds of 1st and 4th quadrants.

Cayo Piedra de Adentro Anchorage: Inner anchorage. Min. depth 29 ft. Swinging area 500 m. Max. draft 26 ft. Open to Northern winds.

Los Meritos Anchorage: Inner anchorage. Min. depth 30 ft. Swinging area 400 m. Draft limited to 20 ft. at low tide.

At "La Poza de Cayo Diana" there are 3 official anchorages: *Explosives Anchorage:* 23° 10′ 22″ and 81° 08′ 56″ W. Min. depth 27 ft. Swinging area 300 m.

Cuarentena Anchorage: For vessels drawing over 15 ft. 23° 11′ 5″ N. 81° 08′ 17″ W. Min. depth 23 ft. Swinging area 350 m.

La Poza Anchorage: Min. depth 29 ft. Swinging area 750 m. Max. draft limited to the Port Official draft. Well sheltered.

Anchorages in Bay:

Cuarentena Anchorage: For vessels drawing 15 ft. or less. 23° 06′ 58″ N. 81° 10′ 48″ W. close to Port inner anchorage. Min. depth 16 ft. Swinging area 33 m.

Official de Bahia Anchorage: Min. depth 15 ft. Max. draft at high tide 15 ft. Swinging area 900 m.

TUGS: Normally tug not required to assist berthing, but when vessels have to berth head to shore, assistance of tug is necessary.

BERTHING: Loading/Discharging Place – Pier: Max. drafts: N.W. side (fore): 19 ft., (aft) 17 ft. 6 in. S.W. side (fore): 18 ft. Aft end not used for large vessels. Pier has double railroad tracks of standard gauge.

Operations in Bay: At present, no cargo operations in the bay are performed, although there is a fleet of nine lighters numbered from one to nine, with a loading capacity of 150 tons each (1,300 bags of the 250-pound type).

STEVEDORES: Export of refined sugar and alcohol. No general cargo operation performed at present. No shore crane available.

Working periods: loading sugar from Monday to Friday 0700/1100–1300/1700 hrs.; Saturday 0700/1100 hrs.; Sunday: no work performed.

When vessel does not achieve daily rate during regular hours, work is carried out from 1900 to 2300 hrs.

Raw sugar loading rate: about 1,138 bags (of the 220-pound type) loaded per 4 hours per gang. This is not a fixed rate but when exceeded stevedores to be paid extra. Bags per sling: 4 bags of raw sugar (of the 220-pound type) loaded per sling.

Capacity: Normally three vessels can be operated simultaneously.

Refined sugar: about 2,500 bags (of the 100-pound type) or 2,272 bags of 50 kilos, loaded per 4 hours per gang period. This is not a fixed rate, but when it is exceeded an additional payment must be made. Bags per sling: 8 bags (of the 50-kilo type and 100-pound type) loaded per sling. For those weighing 100 kilos, 4 bags loaded per sling.

Bulk: Only grates are available for loading bulk sugar.

RADIO: Ships can communicate with port by R.C.A. radio.

TANKERS: Average pumping rate of alcohol about 50,000 gallons per hour.

MEDICAL: Cardenas General Hospital and a clinic.

FRESH WATER: Pier has tank which receives water direct from aqueduct, but not sufficient to supply large quantity to ships. When necessary to deliver more than 80 tons, tank cars must be used to deliver additional quantities at the pier. Any quantity of water can be delivered using tank cars, but order must be placed 48 hours in advance.

Average delivery rate about 20 to 30 t.p.h.

FUEL: Not available.

REPAIRS: Repair shop named "Jose Valdes Reyes" where light repairs can be perfomed.

AUTHORITY: All port authorities located at Custom House building.

AGENT: Empresa Consignatarias Mambisas, Agencia Cardenas, 1ra. Avenida y Calle 4, Cardenas, Matanzas. Tel. 2847 (night: 4830).

CIENFUEGOS: 22.09 N. 80.27 W.
Including sub-port of Casilda (Port Trinidad), and sub-port of Tunas de Zaza:

PILOTAGE: Pilots board vessels 1 mile to South of Faro de los Colorados. Pilot station situated at Castillo de Jagua, at entrance of port. Distance from point where Pilots board vessels to the piers about 7 to 8 miles.

At entrance channel there are two sharp turns at Pasa Caballos and West part of Cayo Carenas.

Vessels permitted enter and sail from port day or night.

ANCHORAGES: General Anchorage and North Anchorage: min. depth at both anchorages 40 ft.

At N.E. part of General Anchorage (narrowest portion), vessels with a length of 560 ft. normally anchor with 3 shackles of chain in water, swinging easily with over 30 ft. draft aft.

Larger vessels can be accommodated at S.W. part of General Anchorage, where swinging area larger, and depth deeper. Min. depth 48 ft.

When piers are occupied, loading or discharging operations can be performed at anchorage. There are 9 barges available, capacity 150 tons each, 3 tugs, *Julia*, *Ramona* and *Granie*. Each tug can tow 2 barges.

MAX. SIZE: Max. length with which vessels can enter port is 700 ft. with draft up to 37 ft., making use of the best conditions, such as slack water, and daylight. Tidal variation about 1 ft. 6 in.

BERTHING: *Cacicedo Pier:* Drafts: 24 ft. fore, 25 ft. aft. Pier length: 385 ft.

Mooring Berth Standard: Min. depth in all area of 45 ft.

Naticorp: For vessels up to 613 ft. length, drafts up to 29 ft. fore and 30 ft. aft. For vessels up to 550 ft. length, drafts up to 29 ft. 6 in. fore, and 30 ft. aft. Vessels secure to 4 mooring dolphins.

Ferrocarril Pier (West Side): For tankers (discharge) length up to 620 ft., drafts: 27 ft. fore, 29 ft. aft. Pier length: 300 ft. For vessels (dry cargo) loading, up to 560 ft. length, draft: 27 ft. fore and 29 ft. aft.

(East Side) – Max. length for vessels loading/discharging 560 ft. with a draft up to 27 ft. fore and 29 ft. aft. Pier length: 240 ft.

Terminal Maritima Pier (installation of mechanical equipment for bulk sugar shipments): Length 558 ft. Draft fore 32 ft., aft 33 ft.

Wharves have railroad tracks. Transportation by trucks can also be effected. No double tracks.

Operation capacity: 4 vessels can operate simultaneously, 2 at Ferrocarril Pier, 1 at Terminal Maritima, and 1 at Cacicedo Pier.

TANKERS: Molasses pumping rate:

Plant N.A. 60/100,000 gallons per hour.
O.T. 25/35,000 gallons per hour.
C.D. 25,000 gallons per hour.

STEVEDORES: Working Periods – Sugar:

From Monday to Friday: 0700/1100 – 1300/1700 hrs.; Saturday: 0700/1100 – 1300/1700 hrs.; Sunday: Subject to Agreement.

General Cargo: 0700/1100 – 1300/1700 hrs. at night time subject to agreement.

Sugar Loading Rate: About 1,350 raw sugar bags (of the 250 pound type) per 4 hours gang period. Presently no bagged sugar is being shipped, but only sugar in bulk through mechanical equipment.

Bulk Sugar Shipments: Through new mechanical installation located at Terminal Maritima.

Sugar Bags per sling: 6 sugar bags (of the 250 pound type) loaded per sling.

Cargo discharging Rate: General cargo about 110 tons per gang/per day. Fertilisers, about 110 tons per gang per day.

Shore Crane: Not available.

RADIO: Vessels communicate with Cienfuegos by radio through Havana-Santiago, and when close to port, through local Custom House communication.

Suggested that ETA messages be given sufficient time in advance to Mambisas – Cienfuegos and to Mambisas – Havana – simultaneously.

To communicate with Casilda only, long distance telephone and telegraph can be used. With Tunas de Zaza, by telegraph only. Cienfuegos has airport, railroad, sea radio, telephone and telegraph.

R.C.A., Western Union and Inalambrica operate at Cienfuegos.

MEDICAL: Two hospitals, General Hospital and Mutualist Clinic (formerly Santorio de la Colonia Espanola), where sick crew members can be hospitalised.

FUEL: Barge capacity for delivering fuel oil is 250 tons. Fuel can also be delivered at former Standard Dock. For delivering regular diesel oil, Ferrocarril dock is to be used, as the barge is out of service.

FRESH WATER: Vessels can be supplied with fresh water delivered by barges. Water barge capacity 250 tons. When delivered during overtime hours or on Sundays, 50% increase.

REPAIRS: Repair shop available, but can only carry out winch repairs and other light work.

AUTHORITIES: All port authorities are located at port of Cienfuegos.

From Cienfuegos to Casilda and Tunas de Zaza, following transportation can be used: railroad, trucks, barges.

It takes from 2 to 5 hours, according to transport conditions, to travel from Cienfuegos to Casilda or Tuna de Zaza.

Distance, by sea, from Cienfuegos to Casilda 45 miles; to Tunas de Zaza 80 miles. Suggested that railroad or highway be used to travel from Cienfuegos to Casilda or Tunas de Zaza. There is daily omnibus and auto service from Cienfuegos to Casilda and Tunas de Zaza.

AGENTS: Empresa Consignatarias Mambisas, Agencia Cienfuegos, Avenida 50 2712, POB 420. Tel. 5718 – 6422 (Night: 6715).

Recommended that all correspondence or instructions be sent through Havana main office. Cienfuegos Agency attends ships that operate at Casilda and Tunas de Zaza. For any information concerning vessels operating at these sub-ports, Cienfuegos Agency should be contacted.

SUB-PORT OF CASILDA: 21.45 N. 79.59 W.

(This is loading port for Trinidad, three miles from Casilda).

PILOTAGE: Vessels should pick up Pilots at Cayo Blanco. Distance from point where Pilot boards vessels to pier is 9 miles.

Entrance channel to Casilda has muddy bottom, with dangerous "S" shaped turn.

ANCHORAGE: Draft 25 ft., swinging area 2.5 miles.

RESTRICTIONS: Vessels can enter and sail during day-time only.

MAX. SIZE: Vessels can enter and sail with max. draft of 25 ft. and length of 512 ft. (Pilot advises it is possible to operate vessels with length up to 565 ft.) Tidal variation about 2 ft.

TUGS: None.

BERTHING: (Dry cargo) Pier length 520 ft., depth 25 ft. (Tankers) Berth length 390 ft.

STEVEDORES: Working periods:

Monday to Friday 0600/1000 – 1200/1600 hrs.; Saturday 0600/1000 – 1200/1600 hrs.; Sunday when necessary, same periods.

Raw sugar loading rate: 1,200 sugar bags, loaded per gang per day. Bags per sling: 6 sugar bags per sling. Operation capacity: only one vessel can operate.

Refined sugar loading rate: 1,500 bags per gang per day. Bags per sling: 12 bags loaded per sling.

General cargo: No regular general cargo operations performed at this port.

Shore crane: No shore crane available.

Bulk sugar equipment: no bulk sugar equipment available.

Warehouses: 2 warehouses with capacity for storage of 70,000 bags of sugar. No. 1 (at the pier) 40,000 bags (250 L). No. 2 (at the Real Street) 30,000 bags.

TANKERS: Discharging pumping rate of fuel oil about 20,000 barrels. Alcohol and molasses not shipped.

MEDICAL: Sick crew members can be sent to General Hospital.

RADIO: Vessels can communicate with port through Havana Radio.

FUEL/REPAIRS: Not available.

FRESH WATER: Vessels can be supplied with fresh water, delivered by means of electric turbine at the pier. Delivered at average of 30 t.p.h.

AUTHORITIES: Port Captain, Custom Authorities and port Doctor travel from Trinidad to Casilda.

AGENT: If any information required regarding ships operating at Casilda, Cienfuegos Agency should be contacted.

Crew mail or any other mail should be sent to Havana main office, from where it is sent to Cienfuegos.

SUB-PORT OF TUNAS DE ZAZA: 21.37 N. 79.32 W.

Seaport of Sancti Spiritus. Port lies about 1.25 miles North of Point Ladrillo.

PILOTAGE: Pilot may board vessels either at Breton Channel or Tunas Channel.

Distance from point where Pilot boards vessel entering through Breton Channel to Tunas de Zaza anchorage is 8 miles. From place where Pilot boards vessel entering through Tunas Channel is 1.5 miles. Pilot station for Tunas Channel, located at Cayo Zaza de Fuera. For Breton Channel, entrance of Breton, that is, 8 miles from anchorage.

MAX. SIZE: Two channel entrances for this port; one through Breton Channel, which is with turns, but not dangerous. Vessels can enter or sail through this channel drawing up to 29 ft. The other one through Tunas Channel, has no turns. Vessels can enter and sail through this channel, drawing up to 22 ft. No length restrictions.

Tidal variation 1 ft. 6 in. Vessels can enter day and night.

TUGS: 3 tugs: *Arturo*, *Don Juan*, and *Tuinicu*, which tow up to 6 barges.

BERTHING: At this port there are no piers. All operations are performed at anchorage with barges. Depth at (In) anchorage 24 ft. and 27 ft. (Out) 30 ft. For sailing with 22 ft. 6 in./24 ft. 8 in. and 29 ft. respectively.

There are 9 barges available for loading sugar with total loading capacity of 7,500 bags. Sugar loading rate: 1,500 bags per gang daily. Bags per sling: 6 sugar bags loaded per sling.

General cargo: No general cargo operations are performed.

Shore crane: No shore crane available.

Bulk sugar equipment: None.

STEVEDORES: Working periods – loading sugar: Monday to Friday 0600/1000 – 1200/1600 hrs.; Saturday 0600/1100 – 1200/1600 hrs.; Sunday: when necessary.

MEDICAL: For sick crew members, there is a general hospital at Sancti Spiritus.

RADIO: Via Radio Havana, for relay through Cienfuegos Agency.

FUEL/REPAIRS: None.

FRESH WATER: Vessels can be supplied by tugboat which carries 30 tons. Delivery average 30 tons per day.

AUTHORITIES: There are Custom House and Captain of the Port Delegations at this sub-port. Customs also acts for Immigration. Port Doctor located at Zaza del Medio.

Vessels can proceed directly to this sub-port where they are visited by port authorities. Means of transportation used by port authorities to give entry is by launch service.

At this sub-port Custom House and Captain of the Port have delegations, but not port Doctor.

AGENT: Vessels operating at this sub-port are attended by personnel from Cienfuegos Agency.

GUANTANAMO: 19.59 N. 75.10 W.

PILOTAGE: Pilots board vessels at distance of 1 mile from Buoy No. 1 at port entrance.

Distance from where Pilots board vessels to: General anchorage: 7.5 miles. "Boqueron" Pier: 7 miles.

APPROACHES: Wide entrance channel with mud bottom and free from navigational hazards.

ANCHORAGE: Max. draft 25 to 27 ft. Swinging area 400 m.

MAX. SIZE: Vessels can enter with max. draft up to 19 ft. and length 500 ft. Tidal variation about 11 in.

TUGS: Not available.

BERTHING: Boqueron Pier: length 550 ft., depth at both sides 23 ft. Pier has 4 railroad tracks of standard gauge. Work not interrupted when shifting sugar railroad cars.

Distance from Caimanera to Boqueron Pier: 1.25 miles. From Caimanera to Boqueron there is daily transportation.

STEVEDORES: Sugar and molasses loading operations are carried out at this port.

Working periods loading raw sugar: From Monday to Friday 0700/1100 – 1300/1700 hrs.; at night time whenever necessary. Saturday 0700/1100 – 1300/1700 hrs.; at night time whenever necessary. Sunday: above-mentioned periods, whenever necessary.

Bagged sugar loading: 780 bags loaded per gang-period. Sugar bags per sling: 4 sugar bags per sling.

Capacity: Two vessels can load simultaneously at Boqueron Pier.

Raw sugar in bulk: Four complete sets of machines and 10 grates.

TANKERS: Molasses pumping rate average of about 35,000 gallons per hour.

MEDICAL: Clinic where sick crew members may receive attention.

FRESH WATER: Can only be supplied by Boqueron Pier but delivery is difficult as brought in railroad tankers from Guantanamo, which is distant about 30 kms. Tank cars capacity up to 20 metric tons. Max. 150 tons can be delivered, but recommended that vessels be supplied with water at another port, delivery about 10 t.p.h. During harvesting of sugar, no water can be supplied.

FUEL/REPAIRS: Not available.

AUTHORITY: Port doctor located at Guantanamo. Other port authorities Custom House, Port Captain, Immigration, located at Caimanera.

AGENT: Consignatarias Mambisas, Carril entre Marine y Correo, POB 5, Caimanera, Oriente. Tel. 23 (night: 36).

HAVANA: 23.09 N. 82.21 W.

PILOTAGE: For requesting Pilot, in daytime or at night, ships shall use signals established in International Signal Code, also they can direct light signal to Morro semaphore and make sound signals at intervals.

Pilot service is compulsory for all foreign ships more than 40 gross tons.

Master must inform Pilot: port of origin, illness of any person on board, or if ship is carrying explosive or easily inflammable materials, in which case the ship shall be anchored in special berths and shall be under control of port authorities.

Any ship in port requiring immediate Pilot services should either call telephone numbers: 62-3602 or 62-2896; or hoist "G" Flag, sound 2 prolonged blasts.

Pilots board vessels approximately 1 mile from port mouth, although in some cases, especially at night-time, they will go out about 3 miles to meet incoming vessels.

Pilot station located at San Pedro St. No. 2. Telephones: 62-3602 and 62-2896.

Distance from where Pilots board vessels up to port anchorage or wharves is about 1 mile.

APPROACHES: Vessels can enter during day and night. At entrance there is a strong current.

MAX. SIZE: Max. draft in channel at low tide is 42 ft. Max. draft in main anchorage is 33 ft., although on many occasions vessels cannot dock with this draft. Tankers can enter drawing up to 37 ft., as they take special course once they are inside bay. Tidal variation about 18 in.

RADIO: Vessels can communicate through CLA radio.

TUGS: Following tugs available:

Name	Length	Speed	H.P.
Pinzon	20.00 m.	5 knots	540
Raquel	14.95 m.	6 knots	145
Chucho	12.40 m.	6 knots	145
Antonio Briones	28.46 m.	12 knots	860
Bick-C	—	—	179
Manuela	17.18 m.	—	325
Mariel	12.40 m.	—	165
Mayari	12.00 m.	—	165
Sara	14.80 m.	—	150
Triunfo	12.40 m.	—	147

BERTHING: *(a)* Andres Gonalez Lines Dock (former name: Havana Coal): Dock used in discharge of bulk fertiliser and coal. Length 1,090 ft., depths (from South to North): 22, 26, 26, 29, 30, 24, 23, 19, 17, 19 ft. Max. draft: 28/30 ft. dependent berth. Railroad tracks and overhead bulk discharge crane.

(b) Sierra Maestra Terminal (former name: Havana Dock Corp.): Terminal used in discharge and loading of general cargo, consists of 3 piers.

Pier No. 1 – North side (former name San Francisco): length 662 ft., width 210 ft., depths (from West to East): 19, 29, 30 ft. Max. draft, 30 ft. Vessels can berth without danger on 33 ft., but with part of vessel away from pier.

Pier No. 1 – South side: length 662 ft., width 210 ft., depths (from West to East): 21, 30, 38 ft. Max. draft 30 ft. Vessels can berth without danger on 33 ft., but with part of vessel away from pier.

Pier No. 2 – North side (former name: La Machina): length 661.5 ft., width 210 ft., depths (from West to East): 24, 30, 39 ft. Max. draft 32 ft. Vessels can berth without danger on 33 ft., but with part of vessel away from pier.

Pier No. 2 – South side: length 602 ft., width 210 ft., depths (from West to East): 21, 30, 36 ft. Max. draft 32 ft. Vessels can berth without danger on 33 ft., but with part of vessel away from pier.

Pier No. 3 – North side (former name: Santa Clara): length 625 ft., width: 210 ft., depths (from West to East): 20, 30, 39 ft. Max. draft 30 ft. Vessels can berth without danger on 33 ft., but with part of vessel away from pier.

Pier No. 3 – South side: length 562 ft., width 210 ft., depths (from West to East): 21, 30, 34 ft. Max. draft 30 ft. Vessels can berth without danger on 33 ft., but with part of vessel away from pier. (Also see "Shipmasters Report").

All 3 piers have railroad sidings connecting with main tracks; are also suitable for truck operations.

(c) Margatiro Iglesias Terminal (former name: Paula Piers): Terminal is used in discharge and loading of general cargo, consists of 3 piers:

Pier No. 1 – North side: length 443 ft., width 118 ft., depth (from East to West): 27 ft. at bay end or East side of pier; 17 ft. at centre and 12 ft. at West or shore end. For some years no operations have been performed at this pier. Max draft 20 ft. Vessels can dock without danger on 23 ft., but with part of vessel away from pier.

Pier No. 1 – South side: length 443 ft., width 118 ft., depths (from East to West): 26 ft. at bay end or East side of pier; 24 ft. at the centre and 8 ft. at West or shore end. Max. draft 20 ft. Vessels can dock without danger on 23 ft., but with part of vessel away from pier.

Pier No. 2 – North side: length 443 ft., width 118 ft., depth (from East to West): 27 ft. at bay end or East side of pier; 20 ft. at centre and 10 ft. at West or shore end. Max. draft 20 ft. Vessels can dock without danger on 23 ft., but with part of vessel away from pier.

Pier No. 2 – South side: length 443 ft., width 118 ft., depth (from East to West): 27 ft. at bay end or East side of pier; 22 ft. at centre and 13 ft. at West shore end. Max. draft 20 ft. Vessels can dock without danger on 23 ft., but with part of vessel away from pier.

Pier No. 3 – North side: length 443 ft., width 118 ft., depth (from East to West): 26 ft. at bay end or East side of Pier; 24 ft. at centre and 11 ft. at West or shore end. Max. draft 18 ft. Vessels can dock without danger on 20 ft., but with part of vessel away from the pier.

Pier No. 3 – South side: length 443 ft., width 118 ft. depth (from East to West): 25 ft. at bay end or East side of pier; 17 ft. at centre and 10 ft. at West or shore end. Max. draft 18 ft. Vessels can dock without danger on 20 ft., but with part of vessel away from the pier.

All 3 piers have railroad sidings connecting with the main tracks; are also suitable for trucking operations.

Breadth between piers: 123 ft.

(d) Havana Central Pier: Pier used in discharge and loading of general cargo. North side: length 434 ft., width 200 ft., depth (from East to West): First 400 ft. of pier has draft of 31 ft. at bay end or East side; 29 ft. at centre and 26 ft. at West shore end. Remaining length must be disregarded due to shallowness of water. Max. draft 28 ft. Vessels can dock without danger on 30 ft., but with part of vessel away from the pier.

South side: length 480 ft., width 200 ft., depth (from East to West): 28 ft. at bay end or East side: 26 ft. at centre and 19 ft. at West or shore end. Max. draft 27 ft. Vessels can dock without danger on 28 ft., but with part of vessel away from pier.

(e) Aracelio Iglesias Terminal (former name: Norguly Terminal): Terminal used in discharge and loading general cargo, consists of a dock and a pier. Dock (Warehouse): length 573 ft., width 44 ft., depth (from N.E. to S.W.): 26 ft. at N.E. end, 23 ft. at centre and 20 ft. at S.W. end. Max. draft 27 ft. if vessels berth starboard side to dock.

Pier – North side: length 518 ft., width 104 ft., depth (from East to West): first 500 ft. of dock 37 ft. at East or bay end, 30 ft. at centre and 24 ft. at shore or West end. Max. draft 30 ft.

Pier – South side: length 449 ft., width 104 ft., depth (from East to West): 34 ft. at East or bay end, 34 ft. at centre and 27 ft. at West or shore end. Max. draft 32 ft.

Dock and pier have railroad sidings connecting with main track; also suitable for trucking operations.

(f) Juan Manuel Diaz Terminal (former name: Ward Line Terminal): Terminal used in discharge and loading general cargo, consists of 2 docks and 1 pier. Dock (Warehouse) No. 3: length 521 ft., width 56 ft., depth (from N.E. to S.W.): 21 ft. at N.E. end, 22 ft. at centre and 20 ft. at S.W. end. Max. draft 24 ft. if vessels berth starboard side to dock.

Pier – North side: length 500 ft., width 125 ft., depth (from East to West): first 450 ft. of pier: 35 ft. at bay end or East side, 30 ft. at centre and 20 ft. at West or shore end. Max. draft 28 ft.

Pier – South side: length 530 ft., width 125 ft., depth (from East to West): first 480 ft. of pier: 33 ft. at bay end or East side, 30 ft. at centre and 24 ft. at shore or West end. Max. draft 33 ft.

Dock (Warehouse) No. 2: length 481 ft., width 31 ft., depth (from N.E. to S.W.): 21 ft. at N.E. end, 22 ft. at centre and 26 ft. at S.W. end max draft 24 ft. if vessel berths port side to dock.

Both dock and pier have railroad sidings connecting with main track; also suitable for trucking operations.

(g) La Coubre Dock (former name: Pan American Dock): Dock used in discharge and loading general cargo, consists of dock and pier. La Coubre Pier: length 390 ft., width 49 ft. North side of pier was customary berth of ferries, depth of narrowest part (emboque) being 22 ft., and depth along pier, from shore to bay, being 19, 25, and 28 ft. Depth at South side of pier; 20 27, 22 ft., but at present no operations performed on this side.

La Coubre Dock: In front of warehouse No. 1, depth from North to South, of 20/23 ft. In front of warehouse No. 2, depth of 22/27 ft. from North to South. Max. draft 25 ft. In front of warehouse No. 1, and in the centre, 23 ft. in front of warehouse No. 2.

No railroad sidings, but suitable for trucking operations.

(h) Tallapiedra Dock (former name: Tallapiedra): Dock used in discharge of lighters. Dock Tallapiedra (Corrido): length 453 ft., depth (from N.E. to S.W.): 14 ft. at N.E. end, 19 ft. at centre and 15 ft. at S.W. end.

No warehouses nor railroad sidings and only suitable for trucking operations.

(i) Antonio Guiteras Dock (former name: Havana Electric Dock): Dock used in discharge of heavy lifts from lighters discharged by vessels performing operations in the bay. Length 847 ft., depth (starting from Tallapiedra Pier No. 2): 26, 21, 21, 18, 11 ft. Dock was formerly used by tankers discharging fuel for Electric Plant. A lighter, 40 ft. wide, was used to breast off the ship which was berthed starboard side to dock, drawing up to 28 ft. bow laying in the mud. If no lighter used, vessels drawing up to 23 ft. only can berth.

(j) Osvaldo Sanchez Dock (former name: Atares-Vaccaro Docks): Docks used mainly in discharge of lumber.

Dock No. 1 (formerly Atares): length 428 ft., width 30 ft., depth (from N.E. to S.W.): 22 ft. at N.E. end, 23 ft. at centre and 24 ft. at S.W. end. Max. draft 24 ft. (berthing port side to dock).

Dock No. 2 (formerly Vaccaro): length 511 ft., width 30 ft., depths (from N.E. to S.W.): 26, 21, 21, 17 ft. Max. draft 25 ft. Berthing starboard side to dock, bow touching bottom. No railroad sidings but suitable for trucking operations.

(k) Melones Dock: Dock has installation for discharge of fuel oil, as well as overhead crane for discharge of fertilisers and coal. Length 718 ft., width 35 ft., depth (from N.E. to S.W.): 18 ft. at N.E. end, 13 ft. at centre, and 10 ft. at S.W. end.

Dock does not have railroad siding or warehouses, although is suitable for trucking operations. Not at present in operation, due to shallow draft.

(l) Puerto Pesquero de la Habana (Havana Fishery Port): Pote Dock, Hacendados Pier and Hacendados Dock have been completely rebuilt forming as a whole "El Puerto Pesquero de la Habana" (Havana Fishery Port). Present depths 23 ft. When completed, drafts should be 26 ft., with exception of that portion which was Hacendados Dock where draft will be 24 ft. Presently vessels are operating at this terminal, but no definite data can be given regarding forms of operation until work officially completed.

Dock No. 1 – Length 738 ft.
Dock No. 1 – Length 853 ft.
Dock No. 2 – Length 505 ft.
Dock No. 3 – Length 738 ft.
Dock No. 4 – Length 450 ft. (Not yet completed).

(m) Terminal Maritima Pesquera Dock: North side: length 714 ft., depth 32.5 ft., S.E. side: length 685 ft., depth 28/26 ft.

Terminal Maritima: Dock in N.E./S.W. direction, is of very recent construction and used in discharge and loading of general cargo. Length 1,747 ft., width 72 ft. Depths from 33/35 ft. Max. draft 31 ft. 5 in., but vessels can dock without danger on 33 ft.

(n) Manuel Porto Pena Terminal (formerly Burrus Docks, Beguristain Dock, Auxiliar Maritima Dock and Regla Coal Dock): Terminal consists of following docks:

Manuel Porto Pena (Burrus): Dock used in discharge of bulk grains. Equipped with elevator and silos, having storage capacity of approximately 20,000 tons which permits discharging rate, under normal circumstance, of about 1,200 tons per day. Length 500 ft., width 26 ft., depths (from S.E. to N.W.) 26, 30, 29, 27 ft. Max. draft 30 ft. 6 in. vessels remaining 2 m. off the dock, but vessels dock without danger on 31 ft. remaining 3 m. off the dock.

(o) Manuel Porto Pena No. 1 (formerly Begueristain): Dock used in discharge and loading of general cargo and sugar. Length 315 ft., width 35 ft., depths (from S.E. to N.W.): 23, 23, 25, 27 ft., max. draft 26 ft., ship remaining separated from the pier. Dock has railroad sidings and is also suitable for trucking operations.

(p) Manuel Porto Pena No. 2 (formerly Auxiliar Maritima): Dock used in loading of sugar and discharge of general cargo. Length 447 ft., width 35.7 ft., depths (from S.E. to N.W.): 26 ft. at S.E. end, 25 ft. at centre and 27 ft. at N.W. end. Max. draft 28 ft., ship remaining separated from pier, but vessels can dock without danger on 29 ft., by loosening moorings and slipping away from dock during loading.

Dock has no warehouse, although equipped with railroad sidings, is suitable for trucking operations, and has installations for discharge of fuel oil.

(q) Manuel Porto Pena No. 3 (formerly Regla Coal): Dock used in discharge and loading of general cargo: length 779 ft., width 30 ft. depths (from S.E. to N.W.): 25 ft. at S.E., 26 ft. at centre and 23 ft. at N.W. end. Max. draft 26 ft. but vessels can perform operations without danger on 29 ft., vessel remaining separated from dock, and bow touching bottom.

Dock has railroad sidings and also suitable for trucking operations. It has installations for discharge of fuel oil and gasoline.

(r) Quinto de Regla Pier: Pier used mainly in sugar loading. Pier – South side: length 622 ft., width 54 ft., depths (from S.W. to S.E.): 27 ft. at S.W. or bay end, 25 ft. at centre and 17 ft. at S.E. end. Max. draft 30 ft.

Pier – North side: length 343 ft., width 54 ft., depth (from N.W. to N.E.): 28 ft. at N.W. or bay end, 26 ft. at centre and 22 ft. at N.E. end. Max. draft 28 ft. (moving vessels along pier as they are being loaded).

Pier has railroad sidings and also suitable for trucking operations.

(s) Fesser Pier: Pier has installations for loading molasses: Pier – South side: length 465 ft., width 30 ft., depth (from S.W. to S.E.): 27 ft. at S.W. or bay end, 25 ft. at centre, and 23 ft. at S.E. end. Max. draft 25 ft.

Pier – North side: length 407 ft., width 30 ft., depth (from N.W. to N.E.): 22 ft. at N.W. or bay end, 26 ft. at centre, and 25 ft. at N.E. end.

(t) Edificios Nos. 1 and 2 docks (former name: American Agricultural and Chemical). Docks used in discharge of fertilisers, also installations for loading and discharging molasses.

Edificio No. 1 Dock (formerly American Agricultural and Chemical): length 516 ft., width 25 ft., depths (from N.E. to N.W.): 21/22 ft. of water throughout whole extension of dock. In loading molasses vessels are breasted off dock by means of a lighter, and can then load up to 29 ft. draft.

Edificio No. 2 Dock (formerly American Agricultural and Chemical): length 380 ft., width 108 ft., depths (from N.E. to S.W.): 19 ft., at N.E. end, 14 ft. at centre and 14 ft. at S.W. end. No operations performed at this dock due to shallow draft.

Docks do not have railroad sidings but are suitable for trucking operations.

(u) Facilidades Maritimas Dock (formerly: Cuban Distilling Dock): Dock used mainly in loading of molasses, and discharging tallow and chemical products. Length 814 ft., width 26 ft., depths (from N.W. to S.E.): 25 ft. at N.W. or bay end, 26 ft. at centre and 23 ft. at S.E. end.

Dock has railroad sidings and also suitable for trucking operations. Max. draft 26 ft.

(v) Nico Lopez Piers Nos. 1 and 2 (formerly Standard Oil Pier and Shell Oil Pier): Piers are used exclusively in discharge of fuel oil, gasoline, etc., and are operated by the Oil Refinery: Pier No. 1 – North side (formerly Standard Oil): length 1,027 ft., depth (from East to West): 36 ft. at Eastern or shore end, 35 ft. at centre and 34 ft. at West or bay end. Max. draft 36 ft. 6 in.

Pier No. 1 – South side: length 1,027 ft., depths (from East to West): 36 ft. at Eastern or shore end, 35 ft. at centre and 34 ft. at West or bay end. Max. draft 36 ft. 6 in.

Pier No. 2 – North side (formerly Shell Oil): length 990 ft., depths (from East to West): 35 ft. at East or shore end, 35 ft. at centre and 38 ft. at West or bay end. Max. draft 38 ft.

Pier No. 2 – South side: length 990 ft., depths (from East to West): 34 ft. at East or shore end, 36 ft. at centre and 38 ft. at bay or West end. Max. draft 36 ft., but vessels can dock without danger on 37 ft. A deeper draft than 37 ft. is not acceptable without running the risk of touching bottom.

Discharging or loading operations are also performed at anchorage. There are 20 barges available.

STEVEDORES: Monday to Friday: working periods 0700 – 1300 and 1300 – 1900 hrs., although if necessary, 2 additional periods of 6 hours each may be worked. Saturday: Same as above. Sundays: No work performed.

Raw Sugar: Approximately 1,400 bags of raw sugar loaded per gang period. Six raw sugar bags loaded per sling. Loading raw sugar on 3 vessels simultaneously.

Refined Sugar: Approximately 3,800 bags of refined sugar (of 50 kg.) loaded per gang period. 12–15 bags loaded per sling.

General cargo: Approximate average discharging rate per gang hour:

General cargo about		10.0 tons
Bagged merchandise	up to 51 kg.	16.0 tons
Bagged merchandise	up to 92 kg.	17.0 tons
Bagged merchandise	more than 92 kg.	19.0 tons
Wood		8.4 tons
Fertilizers:		
Superphosphate		9.9 tons
Simple Superphosphate		8.1 tons
Ammonium		9.0 tons
Potash		9.9 tons
Muraite		10.5 tons
Sulphur		10.3 tons
Phosphoric Rock		11.9 tons
Triple Phosphate		8.0 tons
Sodium Silicate		9.0 tons
Ferromanganese		9.0 tons

Floating Cranes:

Pablo Sandoval	100 tons – boom 51 m.
Frank Pais	25 tons – boom 10 m.
Matilde	6 tons– boom 9 m.

TANKERS: Average pumping rate of molasses is about 60,000 gallons per hour. Average pumping rate of fuel variable, from 3,000 up to 15,000 b.p.h.

TELEPHONES: May be installed on board at Master's request.

DRY DOCK: Operated by Talleres Mambisas an operating unit of Empresa Navegacion Mambisas. Berthing capacity of dry dock: 440 ft. length, 91 ft. breadth, and can handle vessels up to 23 ft. draft. Door has 2 laterals, 1 East and 1 West.

East lateral: length 638 ft., width 38 ft., depth 33 ft. at bay end, 29 ft. at centre and 18 ft. at shore end.

West lateral: length 740 ft., width 38 ft., depth 23 ft. at bay end, 25 ft. at centre and 20 ft. at shore end.

MEDICAL: Hospitals where Crew members can receive attention: Antonetti (Dental Services). Clinica "El Sagrado Corazon" (Medical Services). Hospital Naval de la Havana del Este.

FUEL: Vessels can be supplied with fuel oil or diesel oil/gas oil. Supplied by barges in the bay. There are 3 barges: 1 has capacity about 5,000 barrels and the other two 3,200. Average delivery rate about 1,000 b.p.h.

FRESH WATER: Vessels can be supplied with fresh water by barge in the bay. Six barges available with capacities of 350, 200, 320, 350, 200 and 60 tons. Average rate of delivery about 100 t.p.h.

REPAIRS: Reliable repair shop.

FIRE PRECAUTIONS: Port of Havana has a fire extinguishing ship, kept on permanent watch duty by Safety Corp. who can be reached through telephone number 6–0777.

GENERAL: (1) The port of Havana is approachable 24 hours a day, and dock Pilots keep permanent watch duty on their stations located in surroundings of harbour channel, very close to beacon marker of Pila de Neptuno.

(2) Any ship approaching port in daytime shall hoist national flag, merchant flag, and quarantine flag, not lowering the latter until granted "pratique" by doctors in charge of sanitary inspection. At night she shall show only quarantine lights as prescribed by international Sanitary Regulation.

(3) In case of emergency, ships at anchor shall immediately contact land through Official Radiophone Station CLT, available 24 hours a day, through 2260 kc/s. In very urgent cases, CLT can be contacted through 2182 kc/s CLT services are free of charge.

(4) Ships moored to piers standing off pier heads at night must keep visible red light at the ship's extremity facing the sea.

(5) Every moored ship must strengthen its lines on first warning from Port Authorities when deemed necessary due to bad weather.

(6) Small boats belonging to ships are not authorised to be used for crew or passengers' service within port limits unless otherwise duly authorised by Harbour Master.

(7) When berthing, ratguards must be placed on all mooring ropes.

(8) Port provides boats to dispose of ship's wastes. Services provided free of charge and can be requested through ship's Agent.

SHIPMASTER'S REPORT: November 1978

Pilotage: Compulsory. Advise Agent of vessel's ETA. Pilot boards 1 to 0.5 miles N.W. of Pta. Barloventa.

Restrictions: Vessel is able to enter and leave during hours of darkness and at any stage of the tide.

Max. Size: Max. draft for cargo vessel 33 ft. and for tankers 37 ft.

Tugs: There are 3 large tugs and 7 small tugs available (145–860 h.p.). Vessel is able to dock and undock without the assistance of tugs.

Radio: Havana Radio "CLA".

VHF: Port Authority and Pilot operate on Channel 13. Agent on Channel 12.

Fresh Water: Available.

Repairs: Facilities available.

Fuel: Bunker fuel oil and diesel oil available.

Medical: Doctor and hospital available.

Facilities: Laundry services available, telex available but unreliable. Groceries and meat available but in limited quantity.

Berthing: Terminal Sierra Naestra berth No. 3 South:

Position of berth: 23° 08′ 25″ N., 82° 20′ 42″ W. Distance from entrance 1 mile. Max. size of vessel that can berth LOA 520 ft., beam no restriction. Max. draft 29 ft. Least depth of water in channel from sea to berth 40 ft. Range of tide 1.5 ft. Vessel is able to dock and undock at any stage of the tide day or night.

Bulk Handling Facilities: Two grain silos available.

Cranes: 1 quay equipped with 12 cranes, capacity unknown. 4 floating cranes available, 1×100 tons, 3×75 tons capacity.

Special Cargo Handling Facilities: Ro/Ro facilities available. There are facilities for handling palletised cargo and containers, also there is a reasonable amount of storage space for containers.

Stevedores: Stevedores are allocated by Port Authority and the vessel has no say in the number of gangs supplied. There are a limited amount of steel barges.

Density: 1014.

General: On arrival, vessel waited 2 hours outside for a Pilot then entered harbour where we waited another two and a half hours for a ship to sail, no ship sailed and no other reason given for delay.

Docked starboard side to Sierra Maestra No. 3 South depth 24 ft. forward, 37 ft. aft, 1 tug pushing. Pilots good.

Officials boarded shortly after arrival, following documents required:

Port Health:	1 Health declaration. 3 Crew lists. 1 Vaccination list. All vaccination books.
Immigration:	All discharge books (To be inspected.) 5 Crew lists.
Customs:	3 Personal declarations (In detail) Cargo plan. 5 Crew lists. Cargo Manifests. Pornography in bond.
Agriculture:	2 Crew lists. 1 Provisions list (Comprehensive) Cargo plan.

Personal declaration must include watches, cameras, radios, tape recorders, presents, new clothes and money all of which must be placed under seal. One watch and 1 radio allowed to be retained by each Crew member and 1 camera by Master. Advisable to have all above collected prior to arrival.

Vessels normally searched by police and anything found, i.e., watch, radio, money, new clothes and cameras, etc., confiscated whether declared or not.

To the surprise of officials this vessel was not searched.

All crew are issued with a shore pass with the exception of the Master. Shore leave extends from 0800 to 2400 hrs., extension may be obtained but only on special request to the Agent. Shore passes must show the money issued and must be signed by the Master.

On going ashore money and other articles are checked together with watches, jewellery and lighters, etc., and entered on the pass. Should any shortage or excess be found on return a fine will be imposed. On return money remaining is entered on the pass and anyone taking ashore more than the amount shown on the pass will have it confiscated (this actually happened in Isobela).

Communications outside Cuba are difficult, telexes are accepted by Agents but certainly not always sent the day handed in.

Incoming telexes can be delayed up to 6 days. Telephone calls may be made but usually take 3 to 5 hours by which time offices in Europe are closed. In an emergency British Embassy will transmit urgent messages via direct radio link. Embassy most pleasant and helpful. As will be seen by foregoing, it is essential that schedule made with Portishead and Charterers informed to send all messages via this station.

Stevedores very co-operative but due to uncertainty of transport and information on number of gangs, time of completion was uncertain until last day. All discharge was direct to trucks.

Agriculture Department demand that all garbage be placed in plastic bags with neck tied (they supply bags if none on board and charge vessel). Bags collected twice weekly and shore labour do all handling. All meats except New Zealand and Australian sealed. Daily issue of New Zealand and Australian meats given and fridges resealed, any other meats required must be purchased ashore.

Fuel oil, diesel oil and fresh water available by barge but time of delivery uncertain therefore water must be ordered well in advance of requirement. Agents advised fuel would arrive Thursday morning, eventually arrived Monday night. Diesel oil had arrived prior to the fuel with no advice given to the vessel that vessel was bunkering at all.

Fresh vegetables in very limited supply, though Chandler seemed keen to sell meats.

Repair firm and dock exist but after being promised labour for 3 days and none arriving repairs cancelled.

AUTHORITIES: All port authorities located at Custom House building. Means of transportation used by authorities to clear vessel is launch. Each authority has its own launch for these services.

AGENT: Empresa Consignatarias Mambisas, Oficios y Lamparilla, Lonja del Comercio POB 1785, Habana. Tel. 6–8311 (switchboard) 61–1159 (direct) 79–2682 (night).

ISABELA DE SAGUA: 22.52 N. 80.00 W.

PILOTAGE: Pilots board vessels about 1 or 2 miles out from Nos. 1 and 2 buoys. Pilot station located at Custom House building, Isabela de Sagua. Distance from place where Pilots board vessels to anchorage is 7 miles.

From seaward by stages, the bottom is sandy, coral reef and hard rock, mud and rock under mud, mud and clay.

Turns in channel are not dangerous but there are narrows with dangerous currents.

ANCHORAGES: Inner Anchorage: Can accommodate vessels not exceeding 15 ft. draft. Swinging area unlimited. Several vessels can be accommodated. Operations can be performed at this anchorage.

Outer Anchorage (Buoy Anchorage): Can accommodate vessels drawing over 25 ft. Swinging area unlimited. Operations can be performed at this anchorage when there are good weather conditions.

RESTRICTIONS: Entry and sailing only during daylight due to lack of lights in channel.

MAX. SIZE: Max. draft 23 ft. Max. length 500 ft. Tidal variation about 2.5 ft.

TUGS: Available and necessary.

Name	*Length*	*Speed*	*H.P.*
Silvia	17.85 m.	9 knots	120
Moraima	18.30 m.	9 knots	140
Magdalena	19.78 m.	7 knots	140

BERTHING: Max. drafts with which vessels can always load afloat:

Beguirstain Dock (No. 10) – length 540 ft., draft 15 ft. Dock has pipe-line 8 in. diameter for loading alcohol. Also pipe-line 3 in. diameter for discharge of sulphuric acid and 3 in. diameter pipeline for fresh water supply.

Garcia Dock (No. 9) – length 560 ft., draft 21 ft. Dock has pipe-line 12 in. diameter with 2 hose connectors for loading alcohol. Also pipe-line 1.5 in. diameter for fresh water.

Amezaga Dock – length 324 ft., draft 20 ft. 6 in. For discharge into trucks.

Alfer Dock – length 450 ft., draft 18 ft. 6 in. East side of dock has pipe-line for 16 in. diameter for loading molasses with 2 hose connectors for vessels, and a branch 8 in. diameter for discharge from lighters.

All docks have railroad trucks of standard gauge.

STEVEDORES: Raw Sugar loading rate: 1,300 bags of raw sugar (of 250-pound type) loaded per 4 hour-gang period, or 1,490 (of 220-pound type). From 4 to 5 bags loaded per sling. From lighters, 5 bags.

Refined Sugar: 2,360 bags of refined sugar (50 kg.) are loaded per 4 hour-gang period. 12 bags loaded per sling.

Operational capacity: Three vessels can be operated simultaneously.

Shore Crane: No shore crane available.

Equipment for bulk sugar: Twelve grates available but trimming performed with shovellers.

Loading Raw Sugar – Working periods: From Monday to Friday 0700–1100, 1300–1700 hrs. Saturday 0700–1100 hrs.

General cargo operations occasionally performed at this port, for which above periods apply.

TANKERS: Molasses average pumping rate 40,000 g.p.h.; alcohol average pumping rate 70/77,000 g.p.h. No fuel oil or ammonium discharging operations performed.

FUEL: Not available.

FRESH WATER: Fresh water supplied by barge water-tug up to max. 40–60 tons daily depending on efficiency of aqueduct. Capacity of barge 30 tons. Delivery rate 60 tons per day. Water can be supplied at any pier or inner anchorage.

REPAIRS: Minor repairs can be effected at Isabela de Sagua, larger repairs to be effected at Sagua la Grande, where two repair shops available: Fundicion Marfarlane Nacionalizada and Talleres Esponda Nacionalizado.

MEDICAL: No hospital at Isabela de Sagua. Sick crew members attended at Sagua la Grande Hospital.

SHIPMASTER'S REPORT: November, 1978.

Pilotage: Pilot boards 1.5 miles N.E. Cayo Cristo lighthouse in position 23° 02′ N., 79° 59.4′ W. Pilotage is compulsory. ETA should be sent to vessel's Agent.

Max. Size: Max. LOA 606 ft. Max. beam 75 ft. Max. draft 23 ft. I would suggest the max. size as being 520 ft. LOA, 70 ft. beam and 22 ft. max. draft. Tidal range 2 ft.

Tugs: 3 tugs available each approx. 140 h.p.

Radio: Havana Radio "CLA".

VHF: Not available.

Documents: 8 crew lists. 1 vaccination list, health declaration, 4 currency lists (crew and ships). (Also see "General").

Consuls: Nearest are in Havana.

Medical: Doctor and hospital available in Sagua La Grande at a distance of 10 miles from the port.

Berthing: Espg. De Amezuga Berth: Position 22° 56′ 54″ N., 80° 00′ 40″ W. Distance from berth to entrance 7 miles. Max. size of vessel that can be safely berthed, LOA 520 ft., beam 70 ft. and deepest draft 22 ft. Least depth of water in channel from sea to berth 25 ft. Vessel able to dock and undock at any stage of the tide also vessel able to dock and undock during hours of darkness at times. Special bulk facilities handled at the port include Molasses. There are no quay cranes, Ro/Ro facilities or floating cranes.

Stevedores: Believe there are a total of 8 gangs available for working of general cargo. There are steel and wooden dumb barges available (length 75 ft., beam 30 ft.).

Density: 1004.

General: Documents required: 3 Manifests (Crew declarations); 8 Crew lists; 4 Bonded stores lists; 4 Provision and meats lists; 4 Currency lists (Crew and Ship's); Certificate of sanitary/veterinary inspection (From last Cuban port); 1 Stowage plan; Cargo manifest.

Seals may be opened coastwise but advise not to, with exception of meats.

All conditions as Havana except shore leave only 1800 hrs. to 2200 hrs., except Master, extension granted for officers to 2400 if requested via Agent.

Only chandler 70 miles away.

Fresh water available at 8 t.p.h. (amount may be limited) but must be ordered immediately on arrival if required. We did not order until the last day as we believed we were bound for a U.S.A. Gulf Port, it took 8 hours to hook up and a lot of pressure on Agent.

Berth unsuitable for this size of vessel though using mooring buoys vessel lay securely moored. Concrete pier with wooden fendering slightly dilapidated in places but quite adequate. Pier 320 ft. long and 4 ft. high. Stern secured to 2 mooring buoys, one each quarter, distance approx. 200 ft., but buoy moorings are believed to be suspect. No cargo can be worked at No. 5 except by lighters. Harbour Master states largest vessel suitable for this berth 120 m. LOA. Depth alongside by soundings 22 ft. Forward, 26 ft. aft. Pilots good.

Gangway must be used, as companion ladder will not reach quay.

Channel requires local knowledge but it is well buoyed.

Cargo discharge depends on supply of trucks. Can only work one truck at each hatch therefore to speed up discharge last day two gangs No. 4 discharged into lighter offshore.

AUTHORITY: All port authorities located at port of Isabela de Sagua.

When vessels at anchorage awaiting berthing, authorities transported by tug-boat for cleaning purposes.

AGENT: Empresa Consignatarias Mambisas, Independencia s/n, P.O.B. 18, Isabela de Sagua. Tel. 32-27.

Cables, messages should be addressed "Mambisas Sagua la Grande", but recommended be sent through main office "Mambisas Habana". ETAs should be sent simultaneously to both.

JUCARO: 21.37 N. 78.51 W.
(Including the sub-ports of: Boca Grande and Palo Alto)

APPROACHES: Vessels proceeding to Jucaro sub-ports must call first at Jucaro for Port Authority's clearance.

Tidal variation 1 ft. 6 in. It is not necessary to await slack-water before entering. Recommended that *(a)* vessels arriving from Cuban ports situated to the East of Jucaro, such as Caibarien, Puerto Padre, Manati, Vita, Banes, Antilla, Sagua de Tanamo, Moa, Baracoa, etc., or from foreign ports, should enter Jucaro Port through Breton Channel, and *(b)* all vessels not exceeding 22 ft. draft proceeding from those Cuban ports situated to the West of Jucaro, such as Havana, Mariel, Matanzas, Cardenas, Isabela de Sagua and Cienfuegos, should enter Jucaro port through Tunas Channel.

DOCUMENTS:
10 Crew Lists.
10 Passenger Lists (if passengers on board only).
10 Manifests of cargo (or ballast).
4 Customs crew declaration (including currency).
4 Ship's provision stores, including bonded and narcotics.
1 Health Declaration.
1 Vaccination List.
Clearance from last port.
Deratisation certificate.

PILOTAGE: Pilots board vessels which enter through Breton Channel at Buoy No. 2, which is situated to East of channel entrance, 21° 08′ 18″ N. 79° 30′ 24″ W. with water depth 33 ft. Through this channel vessels can enter drawing up to 29 ft. with max. length 800 ft. Bottom is coral reef. There are dangerous turns at "pasa" of Baandra until Ana Maria Cays have been passed.

For vessels which enter through Tunas Channel, Pilots board at No. 2 Buoy which is situated to East of Channel entrance, 21° 31′ N. 79° 41′ 21″ W. Through this channel vessels can enter drawing up to 22 ft.

No Pilot station. Pilots are to be notified of vessel's arrival 24 hrs. in advance. Distance from place where Pilots board vessels to Jucaro anchorage is 50 miles.

From Jucaro Anchorage to:
Boca Grande Sub-port – 14 miles
Palo Alto Sub-port – 5 miles
Santa Maria Sub-port – 24 miles

RESTRICTIONS: Vessels can enter and sail through both channels day and night.

ANCHORAGES: Loading places, ex-lighters. Three anchorages (very good holding ground), namely, No. 1 Anchorage – 6 miles from the port at South of Obispo Cay, depth 24 ft. No. 2 Anchorage – 7 miles from the port at South-east of Obsipo Cay, depth 27 ft. No. 3 Anchorage: Anchorage 8 miles from the port and 1 mile to Eastward of No. 2 anchorage, depth 30 ft. Is used mainly by tankers loading molasses.

RADIO: Call "Jucaro Radio" on 2182 kHz, will answer on 2760 kHz.

VHF: Pilot boat, Port Captain and Agency equipped with VHF and work on Channel 16.

LOADING (Understood to have been closed for sugar shipments since 1964): Raw sugar.

Working periods: Monday to Friday 0600/1000–1200/1600 hrs.; Saturday 0600/1000–1200/1600 hrs. It is possible to work overtime, also possible to work Sundays and Holidays, if required.

Work carried out on a piece-work basis, and at an average of 2,000 bags per gang-period. 6 sugar bags loaded per sling.

Refined sugar: Work is carried out on a piece-work basis and loading rate averaged about 4,000 bags of the 50 kilo type and 2,000 of the 100 kilo type per gang-period.

Sugar in bulk: Venezuela and Ecuador sugar mills have 5 thrower machines each for distributing sugar in vessels' hatches. Loading carried out by cutting sugar bags through grates placed on vessels hatches.

Shore cranes: None.

TANKERS: Average pumping rate of molasses 20,000 g.p.h.

FUEL/REPAIRS: Not available.

FRESH WATER: Available by barge, capacity about 35 tons.

OPENING/CLOSING HATCHES: By crew.

PROVISIONS: Available, but expensive.

TRANSPORTATION: Distance between Jucaro Port and its sub-ports:
To Santa Maria – 31 miles
To Boca Grande – 15 miles
To Palo Alto – 9 miles

Motor launches are used between port and sub-ports, and take 4.5 hrs, 2.5 hrs. and 1.25 hrs. between Jucaro and Santa Maria, Boca Grande, and Palo Alto respectively.

By automobile, 3.5 hrs. to Santa Maria and 2 hrs. to Boca Grande. No highway from Jucaro to Palo Alto.

MEDICAL: There are two hospitals at Diego de Avila where sick crew members can receive attention. Distance between Jucaro and Diego de Avila is 27 km.

SHIPMASTER'S REPORT: 1977

Lines to the barges to be provided with rat-guards.

Very strict regulations concerning crew declaration of effects, currency and pornography.

All personal effects of crew members will be sealed by Customs, even their used clothes, allowing them out only a couple of clothes changes, one carton of cigarettes and one bottle of spirits.

Advisable to instruct crew members to declare all currency and not to try to take any money ashore. They could not use or change it and could run into a great deal of trouble.

Vessel's deck, engine and accommodation will be searched by Port Authority party.

Shore leave allowed only from 1800 to 2200 hrs.

Smallpox and cholera vaccination available on request. Crew members without a valid smallpox vaccination certificate will not be granted shore leave.

No kind of restrictions for the Master, whose shore leave is unlimited. Strict Customs regulations do no affect him.

No amenities available ashore.

Loading of oranges fast if available. About 200 tons per gang shift.

Precooling of cargo chambers is not required. Oranges stowed in two tiers of four cartons with battens in between. Maximum height of eight cartons. Stowage factor about 95.

AUTHORITY: Custom House, Captain of the Port and Immigration, located at Jucaro. No port authority delegations at the sub-ports.

AGENT: Empresa Consignatarias Mambisas, POB 350, Nuevitas, Camaguey. Cable: "Mambisas–Nuevitas". Tel. 31435; night: 36025.

SUB-PORT OF BOCA GRANDE:

LOCATION: About 15 miles East of Jucaro.

APPROACHES: See "Jucaro".

PILOTAGE: See "Jucaro". Distance from place where Pilots board vessels to Boca Grande is 64 miles. Entrance channel: same as for Jucaro. Tidal variation 1 ft. 6 in.

ANCHORAGES: There are two anchorages for loading operations: No. 1 Anchorage with 24 ft. draft. No. 2 Anchorage with 29 ft. draft. Both anchorages are located at a distance of about 5–7 miles from the dock.

LOADING: At present only refined sugar is exported. All sugar-loading operations are carried out at anchorage by means of lighters. Following lighters available:

Barges	Capacity (50 kg bags)	Capacity 100 kg bags)
Ana	4,900	2,500
Loretto	4,400	2,100
Mascot	4,400	2,100
F 55	4,400	2,100
Trusco 89	5,100	2,980
Angel	3,440	1,700

Working Periods: Monday to Friday 0600/1000 – 1200/1600 hrs.; Saturday 0600/1000 – 1200/1600 hrs. When working is performed on Sundays, same periods apply.

Work is performed on a piece-work basis, and average loading rate is about 2,000 bags, basis 6 bags per sling, and 100 kilo bags. Only one vessel can be worked at a time.

TUGS: Three tugs available.

TANKERS: Discharging operations at No. 1 or No. 2 anchorages. Discharging rate approximately 20,000 g.p.h.

There are also steel barges for transportation of molasses and/or sugar:

Guanales: 100 ft.×30 ft.×7 ft. Sugar capacity: 1,600 bags Molasses capacity: 65,000 gal.
Loreto: 100 ft.×30 ft.×7 ft. Sugar capacity: 1,600 bags Molasses capacity: 65,000 gal.

Each of these barges has 4 tanks measuring 15 ft.×36 ft.×7 ft. Capacity: 3,780 cubic feet or 28,274 gallons each tank. Total capacity: 113,100 gallons. Each barge can load a max. of 400 tons of molasses and each is equipped with steam pump.

COMMUNICATIONS: Launch transportation. It takes 2.5 hrs. for travelling from Boca Grande to Jucaro or Santa Maria. Captain of the Port's radio-telephone is used as means of communication.

All communication and instructions for vessels operating at this sub-port must be given to Nuevitas Agency.

SHIPMASTER'S REPORT: Port will not be operational after 1977.

MANZANILLO: 20.20 N. 77.12 W. (and sub-ports of Ceiba Hueca, Media Luna, Niquero and Ensenada de Mora.)

PILOTAGE: Pilots board vessels at Cabo Cruz. Pilot station located at Cabo Cruz and Pilots communicate with Manzanillo by means of radio-telephone. Distance from place where Pilots board vessels up to Manzanillo through Madrona Channel is 68 miles. Through Palomino Channel (Coloradas de Fuera) is 55 miles.

APPROACHES: *(a)* Madrona Channel: this channel has sharp and narrow turns. Bottom is of soft mud. Max. draft with which vessels can enter through this channel is 33 ft. 3 in. Channel has depth not less than 35 ft. Vessels must wait for slack or favourable tide to proceed through this channel. No tug is necessary.

(b) Palomino Channel: this channel has turns, but they are less sharp and less narrow than those of Madrona Channel. Bottom is of soft mud. Max. draft with which vessels can enter through this channel is 20 ft. No tug is necessary.

RESTRICTIONS: Due to present conditions of channel lights and distance, it is suggested that vessels enter and sail only during daylight.

ANCHORAGES: Inside harbour: No. 1, draft 24 ft. Distance from shore 1 mile. Use: sugar/general cargo.

Outside harbour: No. 2, draft 29–30 ft. No. 3, draft 33 ft. Distance from shore 1.5 miles to 2 miles. Use: sugar/general cargo. Although about 40 ft. depth at this anchorage, it is limited to 33 ft. which is official draft of the entrance channel. Vessels have been loaded at this anchorage up to 33 ft. 6 in. draft.

TUGS: Following tugs available: *Aracelio Iglesias* – tows 3 barges; *Donatilo Lopez* – tows 3 barges; *Raimundo Arias* – tows 3 barges; *Edesio Perez* – tows 3 barges.

LOADING: Sugar-loading operations performed at anchorage by lighters.

Following 12 barges available, each with capacity of 2,000/2,200 bags (250 tons): *Juan Manuel Marquez, Sergio Gonzalez, Jimmy Mirtsel, Pedro Soto Alva, Clodomira, Antonio Lopez, Santiago Lopez, Andres Lijan, Josue Pais Garcia, Adalberto Pesant, Mario Munoz, Elias Zaldivar.*

Also available is barge named *Abel Santamaria*, with capacity of 1,000 bags (250 tons), and provided with derrick and winch for handling lifts up to 2 tons.

At Manzanillo there are three docks: Beattie, Arcos and Terraplen with drafts 8, 7 and 8 ft. respectively. Terraplen Dock is the only one which presently carries out operations, through which sugar is loaded by means of lighters and taken alongside vessels at anchorages.

Docks are suitable for reception and handling of import and export cargo (bulk cargo excepted). They have railroad tracks of non-standard gauge, which connect with warehouses. No shore crane available.

Sugar and general cargo: Working periods: Monday to Friday 0700/1100 – 1300/1700 hrs.; Saturday 0700/1100 hrs.

2,000 raw-sugar bags loaded per gang per day of 8 hours. Only one vessel can operate at this port, order comply with this loading rate.

DISCHARGING: Rates:

Bagged cargo (of 100 lb.)	app. 25 tons per hour
Bagged cargo (of 200 lb.)	app. 35 tons per hour
Iron	app. 7 tons per hour
Wood	app. 8 tons per hour
Jute bags	app. 15 tons per hour

TANKERS: No facilities.

FUEL/FRESH WATER: Not available.

REPAIRS: Mechanic and foundry shop under control of Industry Ministry, where light repairs of machine parts can be performed.

COMMUNICATIONS: Distance from Manzanillo to:

Ceiva Hueca: 15 miles by sea, 72 km. by highway
Media Luna: 23 miles by sea, 45 km. by highway
Niquero: 45 miles by sea, 79 km. by highway
Pilon: 90 miles by sea, 130 km. by paved highway, which reaches up to 15 km. from Niquero whereafter a dirt road must be used to reach Pilon. Dirt road distance of 40 km. During rain season a jeep is used to travel by this road.

Automobile is used to travel from Manzanillo to above sub-ports, and takes: to Ceiba Hueca 1 hour; to Media Luna 1 hour; to Niquero 2 hours and to Pilon 3 hours (in rainy season about 5 hours). Daily automobile services from Manzanillo to Niquero; to Pilon there are trucks specially prepared for this service.

No direct communication between Manzanillo and sub-ports, except Niquero, where there is a long-distance telephone at the telephone centre.

At Pilon and Niquero there are Inalambrica Radio Stations, but radiograms have to be sent to Havana first, from where they are relayed to Manzanillo.

At Manzanillo proper there are long-distance telephones, Inalambrica Radiogram Services and telegraphic and post services. Vessels can communicate with Manzanillo by radio. Vessels messages are received by Government Telegraph (CLT Havana Station).

MEDICAL: There is a hospital at Manzanillo where sick crew members can receive attention.

AUTHORITIES: All Port Authorities, Custom House, Immigration Port Doctor, Port Captain are located at Manzanillo.

Vessels can proceed directly to any of the sub-ports, where Manzanillo Port Authorities travel to give clearance, but advance information must be given to these Authorities for the corresponding permit, as Manzanillo regulations provide that vessels must enter Manzanillo as Custom Official Port.

AGENT: Empresa Consignatarias Mambisas, POB 22, Manzanillo, Oriente. Cable: "Mambisas Manzanillo". Tel. 2533; night: 2369.

(a) SUB-PORT OF CEIBA HUECA:

Vessels may proceed direct to sub-ports (see Manzanillo under "Authorities").

PILOTAGE: Pilots board vessels at Cabo Cruz. Distance from place where Pilots board vessels up to Ceiba Hueca pier is about 42 miles.

APPROACHES: See Manzanillo information. For operations at Ceiba Hueca it should be noted that the pier has a depth of only 19 ft. towards the sea end, for loading. Tidal variation about 1 ft. 6 in.

BERTHING: A motor-boat is required to assist in handling lines to pier and buoys. Boat is brought from Manzanillo.

LOADING: Ceiba Hueca Dock (Enidio Diaz Machado): At this pier, sugar from Ceiba Hueca mill is shipped as well as molasses. Vessels should be in ballast, drawing 8 ft. fore and up to a maximum of 16 ft. aft. Work can only be performed by two gangs on account of length of platform, which is about 130 ft. Depths along pier at shore end 8 ft.; at platform, shore end 16 ft. – sea end 19 ft. Vessels permitted load up to 19 ft.

There is railroad of non-standard gauge from the sugar mill warehouse to the dock platforms.

Working periods: Monday to Friday 0700/1100 – 1300/1700 hrs.; Saturday 0700/1100 hrs.

2,000 bags are loaded per gang-period. 6 bags per sling.

TANKERS: Vessels are loaded with molasses at Ceiba Hueca pier and average pumping rate is 25,000/30,000 g.p.h. Tankers with fuel oil are also operated.

FUEL/REPAIRS: Not available.

FRESH WATER: Vessels can be supplied. Delivery made through pipe-line alongside vessel. Average delivery rate is about 1 t.p.h. (due to low pressure).

COMMUNICATIONS: Government telegraph communication between Manzanillo and Ceiba Hueca up to 1800 hrs. however, there is a telephone line which communicates by means of relay with "La Demajagua" sugar mill, which has direct telephone communication with Manzanillo. This communication is only during sugar-mill office hours, and it is very poor due to above relay.

AGENT: Vessels operating at this sub-port attended by Manzanillo Agency Personnel.

(b) SUB-PORT OF MEDIA LUNA:

Vessels may proceed direct. (See Manzanillo under "Authorities").

PILOTAGE: Pilots board vessels at Cabo Cruz. Distance from place where Pilots board vessels to Media Luna is about 38 miles.

APPROACHES: See "Manzanillo".

MAX. SIZE: Max. draft for vessels to enter and carry out loading operations at this sub-port is 33 ft. Tidal variation 1 ft. 6 in.

LOADING: Loading operations are carried out at anchorage where vessels can load up to 33 ft. Barges and tug-boats are used from Manzanillo.

Working periods: Monday to Friday 0700/1100 – 1300/1700 hrs.; Saturday 0700/1100 hrs.

2,000 bags are loaded per gang-period. Vessels can only work with 3 or 4 gangs. Only one vessel can work at a time.

TANKERS: No facilities.

FUEL/FRESH WATER/REPAIRS: Not available.

COMMUNICATIONS: Between Manzanillo and Media Luna, the only means of communication is Government telegraph, which is available up to 1800 hrs. Manzanillo personnel attend vessels operating at this sub-port.

AUTHORITIES: See "Manzanillo".

(c) SUB-PORT OF NIQUERO:

Vessels may proceed direct. (See under "Authorities").

PILOTAGE: Pilots board vessels at Cabo Cruz. distance from place where Pilots board vessels to Niquero Pier is 15 miles. Tidal variation 1 ft. 6 in.

LOADING: Pier length 400–450 ft., depth up to 23 ft. (North and South sides). There are railroad tracks of different guages and sidings for shifting of flat cars.

Working periods: Monday to Friday 0700/1100 – 1300/1799 hrs.; Saturday 0700/1100 hrs.

2,000 bags loaded per gang-period. 6 bags loaded per sling.

Although Niquero pier has two sides for docking, sugar mill can only supply sugar for working 1 vessel at a time unless overtime be worked at both sugar mill warehouse, and pier.

FRESH WATER: Can be delivered at pier by means of tank cars, capacity 8 tons. About 10 tank cars can be delivered daily but operation has to be performed outside loading hours.

FUEL/REPAIRS: Not available.

TANKERS: No facilities.

COMMUNICATIONS: Long-distance telephone communication between Manzanillo and Niquero sugar-mill office. Distance from sugar-mill office to pier is about 5 km.

AGENT/AUTHORITIES: See "Manzanillo".

(d) SUB-PORT OF PILON (ENSENADA DE MORA):

Vessels may proceed direct to sub-ports (see Manzanillo under "Authorities").

PILOTAGE: Pilot boards vessel at Cabo Cruz.

APPROACHES: From Cabo Cruz to Pilon mouth entrance is open sea. From Pilon mouth to the pier is through channel, with rocky bottom and turns.

ANCHORAGE: Permitted draft up to 23 ft.

MAX. SIZE: Max. draft permitted for vessels entering and sailing harbour is 20 ft. Tidal variation 1 ft. 6 in.

LOADING: Berth length 150 m., depth 20 ft. (presently in bad condition). sugar loading and molasses are performed at this berth. There is a railroad track of non-standard gauge between the sugar mill and the berth.

Working periods: Monday to Friday 0700/1100 – 1300/1700 hrs.; Saturday 0700/1100 hrs.

2,000 bags of sugar loaded per gang per day of 8 hours. 6 bags loaded per sling. In cases when winches are slow, the number of bags per sling is increased. Only one vessel can operate at this berth at a time.

TANKERS: Molasses average pumping rate is 25,000–30,000 g.p.h.

FUEL: Not available.

FRESH WATER: Can be delivered at berth by pipe-line. Average delivery rate about 1 t.p.h.

COMMUNICATIONS: Government telegraph at Pilon. Also local telephone between sugar-mill office and Niquero, where there is Inalambrica system.

AGENT/AUTHORITY: See "Manzanillo".

MARIEL: 23.01 N. 82.46 W. (and sub-ports of Cabanas, Bahia Honda and Santa Lucia)

PILOTAGE: Pilots board vessels about 1 mile from entrance of port. Vessels proceeding to sub-ports of Cabanas and Bahia Honda must pick up Pilot at same place. Pilot station located at 84 street, 5/a and 7/a, Barrio Boca. No telephone communication.

Distance from position where Pilots board vessels to:

Pier of Unit No. 1	– 1.25 miles
Anchorage	– 2.50 miles
Pier of Unit No. 2	– 2.75 miles

APPROACHES: Entrance channel where buoy No. 1 is situated is over a sand bank with 50–55–60 ft. depth. No. 3 buoy situated in 32 ft. of water on rocky bottom, but having close by a depth of 95 ft. No. 5 buoy situated in 30 ft. of water on sand having close by a depth of 33 ft. max. This channel is 328 ft. wide (approx.).

ANCHORAGES: General anchorage – swing area 450 m., depth 29 ft.

Punta Gorda anchorage – swing area 340 m., depth 36 ft.

Cargo operations do not take place at anchorages.

RESTRICTIONS: Vessels can enter and sail during day and night hours, but this should be checked in each case prior to vessel's arrival as on occasions the buoys are missing.

MAX. SIZE: Max. draft with which vessels can enter and sail through channel is 30 ft. and max. length of 574 ft. Tidal variation 1 ft. 4 in. Also see "Berthing".

BERTHING: Unit No. 1 (formerly Marante Pier):

Berth No. 1 (N.W.) length 509 ft., depth 25 ft. (this berth is out of operation).

Berth No. 2 (N.W.) length 250 ft., depth 16–24–30 ft. (max. draft permitted 16 ft.). Presently this berth is occupied by Terminal Electric and is not available for use.

Unit No. 2 (formerly Maritima Mariel Pier):
length 607 ft., width 267 ft.

Berth No. 5 (N.E.) Depth 20 ft., length 607 ft.
Berth No. 6 (N.W.) Depth 26 ft., length 267 ft.
Berth No. 7 (N.E.) Depth 29 ft., length 607 ft.

Cement Pier Plant:

Berth No. 3 Depth 29 ft., length 544 ft. Used for tanker vessels (fuel oil discharge). Vessels with length less than 492 ft. can dock with draft of 29 ft. Over 492 ft. and up to 580 ft. can enter with draft up to 27 ft. fore, and 29 ft. aft. with assistance of one tug (850 h.p.).

Berth No. 4 Depth 15 ft.

The Unit No. 2 piers are used for discharging general cargo and fertiliser. Up to 1962 sugar was shipped through this pier; at present this type of operation is not performed.

For each pier the main transportation used in reception and delivery of cargo is by trucks.

Unit No. 2 pier has railroad tracks of non-standard gauge, for communication with sugar mill Orlando Nodarse.

STEVEDORES: Working periods: Monday to Friday 0700/1300 – 1300/1900 – 1900/0100 hrs.; Saturday 0700/1300 – 1300/1900 – 1900/0100 hrs.

Raw sugar: 845 bags loaded per gang-period. 6 bags per sling. Only one sugar vessel can operate at a time.

General cargo: discharging rate: from 6 to 9 tons per gang hour (approx.).

Bagged merchandise: about 13 tons (100 lb. bag type).
Iron: about 18 tons (fluctuates according to type of iron).
Wood: 12 tons (approx.).
Fertilisers: Muriate of potash: 10 to 13 tons.
Sulphate of ammonia: 8 to 10 tons.
Superphosphate simple: 15 to 18 tons.

Shore cranes: There is one caterpillar (PH movable crane with boom of 80 ft. length, and which can lift 12 tons).

FUEL/REPAIRS: Not available.

FRESH WATER: Can be supplied at both piers by means of tank–truck with capacity of 5 tons. In dry season supplied only during night time.

MEDICAL: No hospital. Crew members requiring medical attention are sent to Havana.

AUTHORITIES: Located at Mariel as follows:

Customs House and Immigration: Ave. 65. 126 Street and 128 Street.

Captain of the Port: Playa "La Boca" at the entrance of the port.

Port Doctor: 128 Street. Ave. 67. and Litoral.

Distance from Mariel to:

Cabanas (anchorage):	25 km.	45 minutes by car.
Cabanas (pier):	57 km.	1 hr. 47 minutes by car.
Bahia Honda:	73 km.	2 hr. by car.
Santa Lucia:	250 km.	4 hours by car.

Car is hired for transportation to above sub-ports. There is daily transportation only between Mariel and Cabanas anchorage.

AGENT: Empresa Consignatarias Mambisas, Apartado 65 12411, Avenida 5, Mariel, Pina del Rio. Tel. 63; night: 54. Cables: "Mambisas Mariel".

(a) SUB-PORT OF CABANAS:

Vessels assigned to Cabanas do not have to enter Mariel for clearance, but must pick up Pilot at Mariel port entrance.

PILOTAGE: See "Mariel".

Distance from position where Pilots board vessels to Anchorage 4 miles; Pier 3.5 miles.

APPROACHES: Entrance channel has sandy bottom on eastern side; and rocky bottom on western. It is about 70 m. wide.

ANCHORAGE: Has depth of 19 ft. and is used for shipment of raw sugar from sugar mill "Augusto Cesar Sandino".

Following barges available for performing above operations:

Barge name	*Capacity for raw Sugar in bags*
Mercedico	995
Oscar	10,000
America	900
Julia	850
Malula	1,200
B–R–16	1,100
V del Carmen	1,400
Cubamaco	1,150
Varadero	1,000
Astillero	1,150

Loading of barges depends on weather conditions at time of shipment.

There is 1 tugboat named *La Nina* which can tow 3 barges.

MAX. SIZE: Max. draft permitted for entry and sailing is 19 ft., and max. length 574 ft. Tidal variation 1 ft. 4 in.

RESTRICTIONS: Vessels should enter and sail only during daylight.

BERTHING: Present name: ECA "Pablo de la Torriente Brau". Former name: "Almacenes de Cabanas". Length 360 ft. (max. length permitted 450 ft.), depth 20 ft.

This dock is commonly known as "Orozo Dock", which is used in shipments of raw sugar. There are railroad tracks of standard gauge.

LOADING: Working periods: raw sugar: Monday to Friday 0700/1100 – 1300/1700 hrs.; Saturday 0700/1100 hrs.

845 bags are loaded per gang-period. 6 bags loaded per sling. 2 vessels can load simultaneously, one at the dock and the other at the anchorage. There are 4 grates for loading sugar in bulk.

FUEL/FRESH WATER/REPAIRS: Not available.

AGENT/AUTHORITIES: See "Mariel". There is a Port Captain at Cabanas.

(b) SUB-PORT OF BAHIA HONDA:

Vessels assigned to load at Bahia Honda do not have to enter Mariel for clearance, but must pick up Pilot at Mariel port entrance.

PILOTAGE: See "Mariel". Distance from position where Pilots board vessels to: dock 4 miles; anchorage 2.75 miles.

APPROACHES: The entrance channel has sandy bottom on Eastern side, and rocky bottom on Western and is approximately 150 m. wide up to Corojal anchorage.

RESTRICTIONS: Entry and sailing only during daylight and necessary to await favourable tide.

ANCHORAGE: Depth 28 ft. Swing area 300 m. Max. length permitted 623 ft. Anchorage used for completion of sugar loading by means of barges that are brought from Havana.

MAX. SIZE: Length 623 ft. and max. ship draft for proceeding up to Corojal anchorage is 28 ft. Tidal variation 1 ft. 4 in.

BERTHING: Dock: "Central Harlem" (formerly "Bahia Honda"):

Length 260 ft., depth 19 ft. Dock is commonly known as Sugar dock of Harlem Sugar Mill. It has railroad track of standard gauge.

LOADING: Sugar working periods: Monday to Friday 0700/1100 – 1300/1700 hrs.; Saturday 0700/1100 hrs.

845 bags of raw sugar are loaded per gang-period as min. (more than the above stipulated amount is always loaded). Only one vessel can load at a time.

AGENT/AUTHORITY: See "Mariel". There are Custom House and Port Captain delegations at Bahia Honda.

(c) SUB-PORT OF SANTA LUCIA: 22° 44′ 13″ N. 83° 59′ 15″ W.

Vessels assigned to Santa Lucia do not have to enter Mariel for clearance, nor to pick up Pilot.

PILOTAGE: Pilots board vessels at Pasa Honda, 2 miles off the phosphorescent buoy. No pilot station. Advice of ships' arrival is given to Custom House Delegation by cable. Distance from place where Pilots board vessels up to first anchorage is 4 miles.

APPROACHES: Channel approximately 200 m. width rocky bottom. It has two turns with dangerous narrows.

LOADING: There are the following anchorages:

1st Anchorage: has depth of 30 ft., but vessels are limited for sailing to max. draft of 15 ft., and length 500 ft.

2nd Anchorage: has depth of 20 ft., but vessels are limited for sailing to max. draft of 18 ft.

3rd Anchorage: open sea without draft limitation.

Working periods: work is performed all day (during daylight) including Saturday and Sunday.

Average loading rate is about 900 tons daily, but rate might be improved in the following cases:

1. Vessels with more than 3 hatches available.
2. Vessels with booms (not of the crane type) since loading is performed by grabs which are to be rigged in order to perform quick loading.
3. Provided only one vessel performs operations (2 vessels may be loaded simultaneously but above rate cannot be complied with).

Loading at this sub-port is by means of grabs rigged to vessel's boom. In cases where vessel has no booms, but cranes, the loading is carried out very slowly as buckets are used in such cases, and having to shovel mineral into buckets delays loading operations.

There are 6 barges for loading mineral with a capacity of 150 tons each.

TUGS: 2 tugs, *Adis* and *Julita* which can tow 2 barges each.

FUEL/FRESH WATER/REPAIRS: Not available.

AGENT/AUTHORITIES: See "Mariel"

Port Authorities use launches for clearing vessels. Agents use automobile to travel from Mariel to Santa Lucia which takes 4 hours.

There are Custom House and Port Captain Delegations at the sub-port of Santa Lucia.

MATANZAS: 23.03 N. 81.34 W.

PILOTAGE: Pilots board vessels about 3 miles after passing the port entrance, in front of Electrical Plant and close to Empresa Consolidada del Petroleo Pier (Texas). Pilot station located at Reynold Garcia Pier (Terminal Maritima). Tel. number 2688.

Distance from place where Pilots board vessels to:

I.C.P. (Texas) Pier	
Reynold Garcia Pier (Terminal Maritima)	– 200 m.
Juan A. Morales Bayona (Cubadist)	– 300 m.
Jose Luis Dubrocq (formerly Fomento)	– 500 m.
Frank Pais (Armour)	

APPROACHES: There are three entrance channels:

North Channel: 50 ft. depth

Central Channel: at North side 27 ft. depth; South side 50 ft. depth.

Entry and sailing channels are straight and without turns or obstacles. North Channel mud bottom, but others with rocky bottom. Tidal variation 1 ft. 6 in.

RESTRICTIONS: Vessels can enter or sail at night but Port Authorities should be advised in advance.

ANCHORAGES:

Indio Anchorage: depth 17 ft.; swing area 120 m.
South Anchorage: depth 30 ft.; swing area 230 m.
Del Medio Anchorage: depth 27 ft.; swing area 20 m.
West Anchorage: depth 21 ft.; swing area 150 m.
North Anchorage: depth 25 ft.; swing area 150 m.
Casacajales Anchorage: depth over 30 ft.

BERTHING: Jesus Menensez (I.C.P.) Pier (formerly Texas) with a depth of 28 ft., length 749 ft., used for discharge of fuel oil. At present no operations are performed at this pier, due to its bad condition.

Frank Pais Dock E.C.D. 41 (formerly Armour) is used in discharge of fuel oil. Depth 21 ft. and length of 365 ft. Vessels drawing over 21 ft. dock under Master's responsibility.

Reynold Garcia Pier (Terminal Maritima): North side: length 450 ft. draft 30 ft. Used for loading bagged sugar and for liquid ammonia.

South side: length 529 ft. Used for loading bulk sugar by mechanical means; also for bagged sugar. A ship's Master states that a vessel loaded bulk sugar to a draft of 39 ft.

Jose Luis Dubrocq (Fomento Maritima): fore part: length 600 ft., draft 24 ft. Used for fertilizer discharge.

Rear part: length 500 ft. draft 28 ft. (out of service).

Morales Bayona Pier; Draft 39 ft. This pier is used for loading blacktrap molasses and alcohol. Also used for discharging sulphuric acid to nearby factory.

Reynold Garcia and Jose Luis Dubrocq piers have railroad tracks standard gauges with sidings for shifting cars. Trucks can also operate at these piers.

Cascajales Anchorage: oil tanker discharge.

STEVEDORES: Working periods: Monday to Friday 0700/1300 – 1300/1900, 1900/0100 hrs.; Saturday same; Sunday no work performed except in special cases.

Raw sugar: 855 raw-sugar bags loaded per gang-period. 5 bags loaded per sling.

Refined sugar: 2,004 refined-sugar bags (50 kg type) are loaded per gang-period (797 of 100 kg type).

12 bags of 50 kilo type per sling; 5 bags of 100 kilo type.

General cargo: average rate of discharge of other kinds of cargo varies depending on the type.

Average rate of fertiliser discharge about 11 tons per gang-hour.

Crane: one steam crane with a boom of 60 ft. which can lift about 40 tons. Crane is mounted on railroad tracks and is used only at Jose Luis Dubrocq pier.

Bulk sugar: The installation of bulk sugar throwers operated by Empresa Consolidada del Azucar, at Reynold Garcia Pier, is by system of conveyor and distribution crane which runs from Parabolicos warehouses up to the end of the pier. A special structure protects the conveyor.

The crane runs on special rail throughout the pier (fore and aft) stopping at each vessel's hold. In cases where the vessel has projecting superstructure, she has to be separated from the pier.

Average loading rate is about 350 t.p.h., depending on the type of vessel. On vessels without tweendecks, an average of 43 t.p.h. has been attained.

Weights of shipment estimated on draft and information provided by Master. Notations are entered in Bill of Lading declaring quantity as subject to amount discharged at destination, which is supervised by Cuban Producers' Representative.

TANKERS: Pumping rate:

Fuel oil	– discharge:	about 500 t.p.h.
Alcohol	– loading:	,, 208 ,,
Molasses	– loading:	,, 263 ,,

FRESH WATER: Supplied only at Reynold Garcia Pier. Delivery slow.

REPAIRS: Can be performed by Cearra y Trabazo.

COMMUNICATIONS: Long-distance telephone, Corporacion Inalambrica Cubana, Press wireless, Government telegraph, postal communication, railroad and buses.

Vessels can communicate through CLA via Cardenas and/or Havana.

MEDICAL: Following hospitals where sick crew members can receive attention: Civil Hospital, Army Hospital, Clinica Moderna, Clinica Villar, Clinica Matanzas.

AUTHORITIES: Located as follows:

Port Doctor: Milanes St. No. 2. Tel. 2672 (home tel. 2338).
Immigration: Santa Teresa St. No. 19. Tel. 2695.
Port Captain: Muelle del Real. Tel. 2469.
Custom House: Versalles St. e/Navia and Riech St. Tel. 2269 (home tel. 2339). (Chief of Custom House watching services.)

AGENT: Empresa Consignatarias Mambisas, POB 245, Tello Lamar Street No. 88, Matanzas. Tel. 2519 and 3079 (night: 3819).

Due to short distance between Havana and Matanzas, a close co-ordination inter-agencies must exist regarding advices of ETA and ETS of vessels transitting between these two ports.

NUEVA GERONA (Isla de Pinos): 21.58 N. 82.56 W.

PILOTAGE: Pilots board vessels at Punta Frances. Distance from place where Pilots board vessels to loading berth is about 34 miles. No pilot station. Chief Pilot is located at No. 3 St. Mo. 612 e/ 6 and 8 Streets, Nueva Gerona, Isla de Pinos.

APPROACHES: Entrance channel or passage from the Gulf to the bank is about 2 miles wide. Bottom throughout the 34 miles is mud (from entrance to anchorage in front of Las Casa River). No dangerous turns or narrows.

RESTRICTIONS: Entry and sailing only during daylight.

ANCHORAGE: Fruit-loading operations performed at anchorage when vessels' draft does not permit them to enter the river.

Vessels are permitted to load at anchorage up to a max. of 19 ft. Swinging area: 600 ft.

Following barges are available:

Evangelina – capacity 80 tons (schooner)
Bongo – capacity 80 tons (barge)
Natalia – capacity 100 tons (schooner)

Working periods: Monday to Friday 0700/1100 – 1300/1700 hrs.; Saturday 0700/1100 hrs.

Whenever sufficient cargo is supplied by the packing plant, the loading rates should be about 120 tons per gang in 8 hours.

MAX. SIZE: Max. draft up to which vessels can load out of the river is 19 ft. Tidal variation 1 ft.

BERTHING: Ferry Dock: Length 200 ft., draft 8 ft. Dock situated about 2 miles up river. Depth of river is 13 ft., and 250 ft. wide. At present dock used for coastwise services by Flota de Navegacion Mambisas (cargo and passengers).

FUEL/FRESH WATER/REPAIRS: Not available.

MEDICAL: General hospital "Heroes de Baire", where sick crew members can receive attention.

COMMUNICATIONS: There are telephone, telegraph and cable (Inalambrica) communications, also air postal service.

AUTHORITIES: Port Authorities are located at Nueva Gerona.

It is strongly recommended that when vessels are assigned to this port, all measures be taken for perfect co-ordination between Agents, Pilots and Port Authorities, and Masters should give ETAs in advance.

SUB-AGENT: Empresas Nacional de Cabotaje, Calle 14 entre 1ra. y 3ra, Nueva Gerona, Isla de Pinos. Cable: "Vapor Nueva Gerona". Tel. 33 and 163 (night: 277).

NUEVITAS: including Pastelillo, Puerto Tarafa, and Bufadero. 21.33 N. 77.16 W.

Nuevitas has following load/discharge berths and terminal facilities at Pastelillo and Puerto Tarafa, also loading berths at Bufadero, through which molasses are exported.

(a) **Pastelillo:**

PILOTAGE: Pilots board vessels at Punta Practicos, 1 mile from buoy No. 1.

Distance from place where Pilots board to: Pastelillo, 8 miles; Bufadero, 12 miles; Puerto Tarafa, 14 miles.

Pilot station located at Punta de Practicos, East of entrance channel. Usual means of communications are radio, telephone and launches.

APPROACHES: Entrance is narrow and winding. Channel is between Point Sotavento and Practicos and is 7 miles long. Vessels may use it safely although care to be taken because of narrow and sharp turns, and velocity of tidal currents.

RESTRICTIONS: Recommended that vessels enter or sail during daylight.

ANCHORAGE: Botijuela Anchorage: Can accommodate vessels up to 33 ft. draft.

MAX. SIZE: Up to 575 ft. length – 33 ft. draft. Up to 610 ft. length – 31 ft. draft. Tidal variation 1 ft. 6 in.

BERTHING: Pier No. 4: Length 458 ft., draft 32 ft. both sides. Vessels must be operated at high tide. Trucking operations cannot be performed at this pier. Pier has 2 railroad tracks. of standard gauge with only 1 inlet.

North side of pier is used for sugar, general cargo and fuel oil. South side of pier used for sugar, general cargo and molasses.

Vessels drawing over 30 ft. 3 in. have to wait high tide for shifting to anchorage.

STEVEDORES: Working periods: Monday to Friday, 0700/1300 – 1300/1900 hrs.; Saturday, 0700/1300 – 1300/1900 hrs.; Sunday, no work is performed.

Raw Sugar: loading rate: max. 1,800 bags per gang in 6 hours. Minimum fixed rate 975 bags in 4 hours or equivalent in 6 hours. 6 bags loaded per sling.

Loading Capacity: 2 sugar vessels can perform sugar loading operations simultaneously.

Refined Sugar: this type of shipment is not regularly performed at this port.

Loading rate: 3,300 bags of 100 lb. each are loaded per gang in a 6-hour period.

General Cargo: discharging rate is about 11 to 12 t.p.h.

Raw Sugar in Bulk: there are 7 sugar thrower machines.

No shore crane available.

TANKERS: Molasses pumping rate about 85,000 g.p.h.

FUEL: Bunkers can be supplied at No. 4 pier. Grades available: fuel oil, diesel oil, and gasoline, but only supplied in small quantities. Delivery rate average – fuel oil 200 t.p.h., diesel oil and gasoline 40 t.p.h. Delivery is by pipe-line or tank cars.

FRESH WATER: Can be supplied at No. 4 pier. Delivered by means of railroad tank cars, each with capacity of approximately 34 tons. Delivery rate about 20 t.p.h.

REPAIRS: Repair Shop "Boga" incorporated in the Industry Ministry.

MEDICAL: There is a municipal hospital where sick crew members can receive attention.

COMMUNICATIONS: There are long-distance telephone communications, cables RCA, Government telegraph and postal service. There is a long-distance telephone between Nuevitas/Pastelillo/Tarafa and Bufadero.

Vessels can communicate with Nuevitas by radiogram (CLA).

AUTHORITIES: Located at Nuevitas.

Authorities travel from Nuevitas to clear the vessels for whichever of the 3 berths they may have been assigned, i.e. Pastelillo, Tarafa or Bufadero.

Means of transportation for port authorities from Nuevitas to the loading/discharging berths is automobile or launches.

AGENTS: Empresa Consignatarias Mambisas, Apartado 250, Puerto Tarafa, Nuevitas. Cable: Mambisas Nuevitas. Tel.: 3–1435 (night: 3–5805 and 3–6025).

(b) **SUB-PORT OF TARAFA:**

PILOTAGE: See "Pastelillo" Distance from place where Pilots board vessels to Tarafa is about 14 miles.

APPROACHES: See "Pastelillo".

RESTRICTIONS: Vessels can enter or sail only during daylight and should wait for slack water.

MAX. SIZE: Max. draft with which vessels can enter Tarafa is 25 ft. 8 in. In exceptional cases up to 26 ft. 6 in.

Max. length up to 600 ft. Vessels drawing over 25 ft. 3 in. should wait for high tide before shifting anchorage. Tidal variation 1 ft. 6 in.

BERTHING: For sugar and general cargo.

Pier "B" – North side: length 480 ft., depth 19 ft. (high water). South side: depth 19 ft. (high water).

Pier "C" – North side: length 767 ft., depth 25 ft. 6 in. (high water). South side: depth 25 ft. (high water).

Pier "D" – North side: length 767 ft., depth 25 ft. 6 in. (high water). South side: length 477 ft., depth 25 ft. (high water).

Vessels drawing 25 ft. 6 in. and over when shifting to Pastelillo must do so at high tide.

These 3 piers each have 4 railroad tracks of standard gauge but sugar cars cannot enter loaded at one side and exit at the other side. Usually loaded sugar cars are unloaded first and, whilst shifting takes place, the last ones are discharged in order not to lose time in this movement.

STEVEDORES: Working periods – raw sugar, loading rate, refined sugar, general cargo, etc., same as for Pastelillo. 6 sugar vessels can operate simultaneously. No crane available.

FUELS: No bunkers usually supplied at this terminal, but in special cases bunkers have been supplied at Pier "B".

FRESH WATER: Can be supplied at Pier "B", "C", and "D".

AUTHORITIES: See "Pastelillo".

(c) **SUB-PORT OF BUFADERO:**

PILOTAGE: See "Pastelillo". Distance from place where Pilots board vessels to Bufadero is 12 miles.

APPROACHES: See "Pastelillo".

RESTRICTIONS: Vessels drawing over 25 ft. 3 in. should await high tide for shifting to anchorage.

For entering-sailing, vessels should wait for slack water and only during daylight.

MAX. SIZE: Max. draft with which vessels can enter/sail to/from Bufadero is officially up to 25 ft. 3 in. but actually up to 25 ft. 6 in. Length 600 ft. Tidal variation 1 ft. 6 in.

BERTHING: Pier, length 557 ft.; draft, North side, 25 ft.; draft South side, 25 ft.

This pier is only used for molasses and fuel oil. Average pumping rate of molasses is 70,000 g.p.h. Only South side is in operation.

FUEL/FRESH WATER/REPAIRS: Not available.

AUTHORITIES: See "Pastelillo".

PUERTO PADRE–Cayo Juan Claro: 21.17 N. 76.32 W. (and sub-port of Manati)

Vessels can proceed direct to Cayo Juan Claro and Port Authorities travel to Cayo Juan Claro for clearance.

PILOTAGE: Pilots board vessels at entrance, not less than 1 mile from mouth of port. Distance from place where Pilots board vessels to pier is about 2.5 miles.

APPROACHES: Funnel-shaped at entry. 2 turns, but the one to take into consideration when manoeuvring vessels over 525 ft. is "Careneoro" turn. Vessels with a length of 565 ft. have entered this port. Bottom is rocky in entrance channel and muddy in bay.

RESTRICTIONS: Vessels can enter only during daylight and must wait for slack water for entering/sailing due to current in the channel.

MAX. SIZE: Vessels can sail with max. draft of 25 ft. up to length of 500 ft. Over 500 ft. length with draft up to 24 ft. Max. length permitted 557 ft. Tidal variation 2 ft. 3 in.

BERTHING: Loading and/or discharging operations are carried out at Cayo Juan Claro which is about 3 miles distant from Puerto Padre.

Dock No. 1 For loading sugar: length 509 ft., width 30 ft., depth 25 ft.

Dock No. 2 For loading molasses and discharge of fuel oil and gas oil: length 272 ft., width 12 ft., depth 25 ft. This dock has railroad tracks of non-standard gauge. A launch is used for handling lines in berthing.

STEVEDORES: Working periods: Monday to Friday 0700/1100 – 1300/1700 hrs.; Saturday 0700/1100 hrs.

Raw sugar: loading rate max. 1,430 raw sugar bags loaded per gang period. Minimum is 650 bags. 5 bags loaded per sling. Only one vessel can operate at a time. Empty jute bags have been discharged and average discharge rate is about 45 metric tons per gang period. No crane available.

Sugar in bulk: 5 thrower machines for loading sugar in bulk.

TANKERS: Molasses average pumping rate 50,000 g.p.h. Fuel oil, discharging rate 45,000 g.p.h. Gas oil discharging rate 35,000 g.p.h.

FUEL: Not available.

FRESH WATER: Can be supplied at No. 1 pier by pipe-line. Delivery rate 17 t.p.h.

REPAIRS: Port has no repair shop, but in event winch damage or any other light repairs, this work can be carried out at the Sugar Mill "Central Antonio Guiteras" Repair Shop.

MEDICAL: General Hospital at Puerto Padre where sick crew members can receive attention.

AUTHORITIES: Port Doctor and Custom House are located at Puerto Padre. Immigration at Chaparra. Port Captain at Cayo Juan Claro.

Distance from Cayo Juan Claro where all cargo operations are performed to Puerto Padre is 3 miles. Means of transportation between Puerto Padre and Cayo Juan Claro: motor-boat, railroad, and automobile.

From Puerto Padre to Cayo Juan Claro it takes: by motor boat 30 minutes; by automobile 5 minutes; railroad 20 minutes.

Means of communications available at Puerto Padre: telephone, cable (Inalambrica), telegraph and postal service. Vessels can communicate with Puerto Padre via CLA Habana.

AGENT: Empresa Consignatarias Mambisas, Cayo Juan Claro, Puerto Padre. Tel. 208–7 (Cayo Juan Claro); (Night 165). Cable: "Mambisas Puerto Padre".

(a) **SUB-PORT OF MANATI** 21.24 N. 26.49 W.

Vessels can proceed directly to this sub-port without calling first at Puerto Padre for clearance.

PILOTAGE: Pilots board vessels about 1 mile from entrance. No pilot station. Pilots located at Manati and ETA notice to be given to them well in advance. Distance from place where pilots board vessels to pier is about 3 miles.

APPROACHES: Narrow channel, very deep (min. depth 40 ft.) Bottom is irregular, parts where it is sandy and others rocky.
RESTRICTIONS: Not necessary to await slack water for entry/sailing; but considering large tonnage of vessels presently entering port for topping-off, if there is a strong current Pilots wait until current loses strength order to avoid accidents. Vessels can enter and sail only during daylight.
ANCHORAGE: Swing area 600 ft. (approx.). Owing to reduced space, this anchorage is not safe for anchoring vessels drawing over 26 ft.
MAX. SIZE: Vessels drawing up to 30 ft. and a length of 500 ft. have entered. Max. draft with which vessels can enter and sail:

(a) Presently vessels can enter with length (Liberty type) up to 440/460 ft. drawing up to 28 ft. Up to 29 ft. as max. limit.

(b) With a length up to 500 ft. drawing not over 26 ft. Vessels with above specifications can enter port and berth whenever tide favourable and weather good.

Both sizes of vessels can load up to a max. draft of 30 ft. Also vessels with length up to 560 ft. and drawing up to 17 ft. can enter port, although it is not advisable to do so on account of the present dock conditions. Tidal variation, 2 ft. 6 in.
BERTHING: Dock length 465 ft. At South end of dock there is a small shallow which renders worthless about 70 ft. of dock space. Present max. depth at dock is 30 ft. 02 in. at high tide.
STEVEDORES: Loading sugar: working periods: Monday to Friday 0700/1100 – 1300/1700 hrs.; Saturday 0700/1100 – 1300/1700 hrs. When necessary, work is performed at night. Sunday is also worked when required. 1,040 sugar bags loaded per gang period; 4 sugar bags loaded per sling. Only one vessel can operate at a time. No refined sugar operations performed. No shore crane available. Sugar mill has 5 grates and 3 machines for spreading sugar in hatches.
TANKERS: Molasses pumping rate 25/30,000 g.p.h. Fuel oil pumping rate at average of 1,700 b.p.h.
FUEL: Not available.
FRESH WATER: Supplied by pipe-line at pier. Pipe-line 2 in. in diameter and delivery at an average rate of 15 – 16 t.p.h. Amount that can be delivered depends on supply at sugar mill.
REPAIRS: Sugar mill repair shop for minor repairs. Welder available.
COMMUNICATIONS: Long-distance telephone communication between Manati and Puerto Padre, although difficult owing to fact that there are only two lines from Manati and they are almost always congested. There are some occasions when an entire day is spent trying to obtain communication without result. Victoria de las Tunas telephone operator serves on occasions as "relay".

Vessels cannot communicate by radio with this port.
AUTHORITIES: Port Doctor and Port Captain located at this port. Custom House delegation located here, also Immigration Inspector who attends Gibara, Vita and Puerto Padre. When vessels enter and anchor awaiting for favourable tide to dock, they are cleared by Customs at the anchorage. If vessel arrives on flood tide (which is best tide for berthing) Port Authorities visit vessel when berthed.

When vessels enter at Manati, the Manifest order number is given by Puerto Padre Custom House. Custom House clearance is given by Manati Custom House Delegation of Puerto Padre. Distance from Manati subport to Puerto Padre port is 17 miles by sea. By highway, as journey is made through Victoria de las Tunas, distance about 140 kilometres. From Manati to Victoria de las Tunas, takes 1.5 hours. From Victoria de las Tunas to Puerto Padre, about 1 hour. There is railroad transportation between Manati and Puerto Padre and it takes about the same time. There are 3 daily services between Manati and Victoria de las Tunas by train, and 2 by highway.
AGENT: Empresa Consignatarias Mambisas, Central Manati. Cable: "Mambisas Puerto Padre". Tel. 144–3.

SANTA CRUZ DEL SUR (and sub-ports of Manopla and Guayabal): 20.42 N. 77.59 W. (See Plan Book)

PILOTAGE: Pilots board vessels close to buoy indicating entrance channel (Cuatro Reales) between "La Ceiba" bank and Carapacho Cay Lighthouse. Distance from place where Pilots board vessels (Cuatro Reales Channel) to Santa Cruz anchorage is 11 miles.
APPROACHES: Entrance channel has depth of 45 ft. Bottom is mud, gravel and loose sand. In the narrowest part of channel is a turn of about 20 degrees.
RESTRICTIONS: Vessels cannot enter/sail at night. Not necessary to wait for slack water for entering/sailing.
ANCHORAGES: No. 1, 24 ft.; No. 2, 26 ft.; No. 3, 36 ft.; No. 4, 40 ft. Sugar-loading operations were perfomed at anchorages. There were 10 barges available which are presently operating at the sub-port of Santa Maria (Jucaro). Similarly, the tugs which were used at this port are at present operating at Jucaro.
MAX. SIZE: Vessels can enter/sail through channel with any draft and length subject official draft of the port which is 35 ft. Tidal variation 1 ft. 5 in.
LOADING: Raw sugar: working periods: Monday to Friday 0600/0800 – 0830/1100 – 1200/1530 hrs.; Saturday 0600/0800 – 0830/1030 hrs.; Sunday: when it has been necessary, work has been performed.

Loading rate: 1,950 bags loaded per gang period. 6 bags loaded per sling. Only 1 vessel can operate at a time. No crane available.

Refined sugar – no operations performed.

Raw sugar in bulk – no sugar in bulk is shipped by this port. Bulk sugar is shipped by the sub-port of Guayabal.
TANKERS: No tankers operate at Santa Cruz del Sur proper.
COMMUNICATIONS: Long-distance telephone communication with Guayabal can be established through San Francisco Sugar Mill. Telegraph can also be used. There is no telephone or telegraph communication beteen Santa Cruz and Manopla.

At Santa Cruz del Sur there are long-distance telephone, Government telegraph and postal service. Vessels can communicate with Santa Cruz by telegraph via Radio Habana.
MEDICAL: No hospital. The nearest hospital where sick crew members can be attended is located at Camaguey, 80 km. from Santa Cruz.
FUEL/WATER/REPAIRS: Not available.
AUTHORITIES: Port Authorities are located at this port. Launch services are used by Port Authorities to clear vessels.

Distance from Santa Cruz del Sur to Manopla: 14 miles; Guayabal: 14 miles. From Santa Cruz to Manopla by sea 1.5 hours; by road 1 hour. To Guayabal by sea 3 hours; by road 2.5 hours.

No daily transportation between Santa Cruz and its sub-ports. Launch or automobile are to be hired for this purpose.
AGENT: Empresa Consignatarias Mambisas, Calle Carretera s/n, PO Box 49, Santa Cruz del Sur, Camaguey. Tel. 11 (night 65 and 26–8). Cables: "Mambisas Santa Cruz del Sur".

(a) SUB-PORT OF MANOPLA:

PILOTAGE: After Pilot boards vessel at Cuatro Reales Channel, vessel proceeds to Santa Cruz for clearance, thence takes another Pilot and proceeds to sub-port of Manopla, 14 miles distant from Santa Cruz.
APPROACHES: See Santa Cruz. Entrance channel to sub-port of Manopla – Canal de Media Luna, Canal de los Bayameses, where vessels anchor, is a mile wide, bottom soft mud. No dangerous turns. Vessels of any length can enter and the anchorage depth is 24–40 ft. Official permitted draft 35 ft. Vessels can enter/sail only during daylight. Not necessary to wait for slack water for entering/sailing. Tidal variation 1 ft. 6 in.
LOADING: Anchorage No. 1: 26 ft.; No. 2: 40 ft. Loading sugar operations were performed at above anchorages by means of barges. The following barges and tugboats were available:

Macareno No. 1	– capacity: 329 metric tons, 2870 bags of raw sugar or 75,000 gallons of molasses.
Macareno No. 2	– capacity: 329 metric tons, 2,870 bags of raw sugar or 75,000 gallons of molasses.
Eulalia	– capacity: 269 metric tons, 2,350 bags of raw sugar. Has no tanks.
Miguelito	– capacity: 269 metric tons, 2,340 bags of raw sugar. Has no tanks.
Josefa	capacity: 269 metric tons, 2,340 bags of raw sugar or 48,000 gallons of molasses.

Tug: *Fox* – length 66 ft., breadth 14 ft., 165 h.p. Tows the fleet of barges utilised at Manopla.
TANKERS: Average pumping rate of molasses 20,000 g.p.h.
COMMUNICATIONS: No long-distance telephone communication. There is telegraph service which works up to 1800 hrs.
FUEL/WATER/REPAIRS: Not available.

AUTHORITIES: See "Santa Cruz".

(b) SUB-PORT OF GUAYABAL: (See Plan Book)

PILOTAGE: After Pilots board vessels at Cuatro Reales Channel, they proceed directly to sub-port of Guayabal, where Customs clearance takes place. Also see "Shipmaster's Report".
APPROACHES: Dredged channel 2,474 m. in length, 60 m. in width with average depth of 30 ft.
ANCHORAGE: Suitable for vessels with draft up to 40 ft.
MAX. SIZE: Official draft for the port is 35 ft., but Pilots advise max. draft with which vessels may sail from the berth is 32 ft. 9 in. at HW, with max. length 510 ft.
BERTHING: Pier: length 508 ft., depth 32 ft. 9 in. at high water.
STEVEDORES: Sugar loading in bulk. Loading of molasses and alcohol takes place frequently. Fuel oil and general cargo discharge.

Sugar in bulk – at pier there is an installation operated by electric motor control which moves a convex-shaped conveyor and transports the bulk sugar from warehouse to the vessel. 2 thrower machines, 600 and 400 t.p.h. respectively. Average loading rate about 250 t.p.h. although occasionally average of 400 tons has been obtained. There is some time lost on account of shifting the crane. Occasionally shovellers are required, and work continues 24 hours a day.

General cargo – it is not customary to receive general cargo at this sub-port, although on occasion bales of empty jute bags have been received, destined to neighbouring sugar mills. At present there are no facilities for discharge of general cargo, and no shore cranes available.
TANKERS: Shipment of molasses and alcohol is quite frequent. Vessels discharging fuel oil may berth with max. draft of 27 ft. without touching bottom, which is of soft mud.
COMMUNICATIONS: Communications between Guayabal and Santa Cruz are good. It is necessary to travel to Sugar Mill San Francisco (about 20 km. from the pier) in order to communicate by telephone with Santa Cruz.

Masters must send messages giving ETA addressed to Mambisas Santa Cruz del Sur.
FUEL/REPAIRS: Not available.
FRESH WATER: Supplied at pier by pipe-line at average rate of delivery 10 t.p.h.

SHIPMASTER'S REPORT: 1978.

Pilotage: Pilots are arranged by the Agent at Santa Cruz del Sur, (Mambisas). The boarding station shown on charts and mentioned in Pilot Books is now non-existent. Instead the Pilot comes direct from Santa Cruz when a ship is expected and boards the vessel between No. 2 Buoy and No. 4 Buoy South of the entrance to Cuatro Reales Channel. Vessel then proceeds to Guayabal, where it is necessary to anchor off the port for clearance.

Approaches: The navigable width of the approach channel, is at present 50 m., the buoys being moved accordingly, with an average depth of 32 ft. The centre alignment of the approach channel is 011.5° T. This is indicated by two fixed leading marks. The forward one, a metal pole with a yellow triangle mark, apex up, at night a fixed red light. The rear mark is a yellow triangle apex up, attached to the top of a water tank (on a framework tower) at night a fixed green light. This leading line leads "down" the Eastern side of the one and only jetty, along the top of the elevated (roofed-over) conveyor belt.

Documents/Customs:

Crew Declaration (Manifest)	6 copies
Steward's store list	6 copies
Deck/Engine store list	6 copies
Maritime Declaration of Health	3 copies
Dangerous drugs list	6 copies
Slop chest/Bonded stores	6 copies
Explosives list (Distress Rockets, etc.)	6 copies
List of foreign currency	5 copies
List of ship's equipment, i.e. films, binoculars, T.V.'s, sextant, etc.	4 copies.

All foreign currency, cameras, dangerous drugs, and crew presents to take home were all sealed up in the bond locker along with its contents. Meat room sealed up. Although all our meat is of Australian or New Zealand origin, some of the lamb had a USA wrapper on it which made it American meat and this is not acceptable in Cuba. As far as I can understand the meat from Australia, New Zealand, Japan, USSR, only is acceptable in Cuba. Valid smallpox vaccinations are required.

AUTHORITIES: Port Captain and Immigration's Delegations at Guayabal. Custom's delegate travels from Santa Cruz to Guayabal to conduct clearance. Distance 24 miles (by sea) from Guayabal to Santa Cruz. By road 60 km. Time 3 hours by sea and 2 hours by road.

AGENT: Vessels operating at Guayabal are attended by Santa Cruz del Sur agency personnel.

SANTIAGO DE CUBA: 19.50 N. 75.52 W.

PILOTAGE: Pilots board vessels 1 mile from mouth of port. Pilot station located in small Cay at entrance of bay known as Gramma Cay (formerly Smith Cay). Launch service is only means of communication available between Santiago de Cuba and Gramma Cay. Pilots also have office located at Custom House building with telephone communication. Distance from place where Pilots board vessels to: Piers 4 miles; Anchorage 3.5 miles; Refinery Pier 1.5 miles.

APPROACHES: The entrance, up to a distance of 0.5 mile, has a rock bottom. Thereafter, for a distance of 1 mile muddy bottom, and remaining 2.5 miles is soft mud. There are some turns, and the channel and entrance to the port are narrow.

RESTRICTIONS: Vessels can enter and sail only during daylight from 0600 to 1800 hrs.

ANCHORAGES: Inner anchorages located in the area from North of "Ratones Cay" up to West of buoy No. 20. Can accommodate vessels drawing up to 30 ft. and a length up to 680 ft.

MAX. SIZE: Vessels with a length of 680 ft. and a draft of 35 ft. can enter up to the refinery, provided they arrive during early morning hours. Tidal variation 1 ft. 6 in.

TUGS: Tugs are used for deep-drafted vessels and otherwise as situation demands. Following tugs are available:

Toledo	length 5.18 m.;	h.p. 165;	speed 9 knots
Santa Barbara	length 60 ft.;	h.p. 165;	speed 8 knots
Caridad	length 45 ft.;	h.p. 110;	speed 7 knots

BERTHING: Dock No. 1 "Luis Felipe Mena Gil" (formerly Malecon). Length 400 ft., depth 25 ft. at centre, 22 ft. at West end, and 22 ft. fore and 24 ft. aft at East end. Dock used for sugar loading and discharge of mineral, heavy lifts and volume cargo. It has 2 railroad tracks of standard gauge. (Notwithstanding above depth, vessels drawing up to 28 ft./28 ft. 6 in. sail from this dock.)

Ferrocarril Pier – length 240 ft., depth 23 ft. Vessels moor to dolphins. Distance between end dolphins is 400 ft. Used only for molasses loading. There is a pipe-line installation.

Pier No. 2 – "Miguel Santiesteban Reyes" (formerly Muelle de Luz) Wooden pier, length 500 ft., depth (North side) 22 ft. 06 in. shore end; 23 ft. 06 in. sea end. (South side) 20 ft. 06 in. shore end; 22 ft. 6 in. sea end. Used for general cargo discharge. Trucks and trailers operate at this pier.

Pier No. 3 – "Rolando Roca Pacheco" (formerly La Maritima). Concrete pier, length 650 ft., depth (North side) 22 ft. shore end; 4 ft. sea end. (South side) 24 ft. shore end; 25 ft. sea end. Used for discharge of general cargo. Trucks and trailers operate at this dock.

La Molinera Oriental Pier (present name: "Frank Pais"). Depth 21 ft. fore; 22 ft. 06 in. aft.

Vessels do not berth directly on to this pier, but are secured to dolphins at narrow side of the pier. Used for bulk wheat discharge. Capacity of silos 8,200 tons. Conveyor and pipe-line are available.

Cement Factory Pier – length 290 ft., depth 17 ft. Used for cement loading. Trucks can be used.

Refineria Hnos. Diaz Pier – length 789 ft., depth 40 ft. both sides. depth 45 ft. at head of pier. Used for discharge and loading fuel. Also used for bunkering. Pipe-line installation.

Muelle Romero Dock – length 492 ft., depth (East side) 14 ft. fwd., 19 ft. aft (West side) 19 ft. 06 in. fwd., 22 ft. aft.

Above depths taken at low water.

STEVEDORES: Working periods: Monday to Friday 0700/1300 – 1300/1900 hrs.; Saturday the same; Sunday worked only if vessel completing cargo.

Raw Sugar: Loading rate about 1,200 bags loaded per gang period; 6 bags loaded per sling. 2 vessels can load sugar simultaneously.

General Cargo – approximate discharging rates:

General cargo	7–8 tons per gang hour
Bagged cargo	15 tons per gang hour
Iron	7 tons per gang hour
Wood	3 standards
Fertilisers	15 tons per gang hour

Shore Crane – there is movable crane with boom of 75 ft. length and lifting capacity about 19 tons.

Bulk sugar – 5 thrower machines available.

TANKERS: Average pumping rate: Molasses 30,000 g.p.h. Fuel oil 13,000 b.p.h.

COMMUNICATIONS: Radio telegrams, radiotelephony, telegraph and telephones. R.C.A., Inalambrica. All-American, Prewi, radio and Government telegraph. Also air, railroad and bus services.

Vessels can communicate with Santiago de Cuba through CLM and RCA.

MEDICAL: Sick crew members can be attended at Army Hospital or Los Angeles Hospital.

FUEL: Fuel oil and diesel oil available. Delivery rate about 7,000 b.p.h.

FRESH WATER: Can be supplied docked/anchored.

REPAIRS: Following repair shops: Joaquin Lamas, Giron.

AUTHORITIES: Located at Custom House building.

AGENT: Empresa Consignatarias Mambisas, PO Box 522, Jose Antonio Saco 10, Santiago de Cuba. Tel. 2891/7489 (night: 6874). Cables: "Mambisas Santiago de Cuba."

TANAMO: 20.44 N. 75.20 W.

PILOT: Pilot boards about 1 mile from entrance. Pilot station located at entrance of port mouth. Usual means of communication is by launch. Distance from place where Pilots board vessels to: Punta Gorda Dock: 5 miles; Cayo Mambi Dock: 7 miles.

APPROACHES: Entrance channel has rocky and muddy bottom. There are 90° turns, and narrow passes.

RESTRICTIONS: Entry and sailing at slack water and daylight only. Tug assistance required for vessels between 450 and 600 ft. length.

MAX. SIZE: If berthing, draft 22 ft., length 450 ft. If anchoring, draft 28 ft.

BERTHING: Punta Gorda Dock: length 345 ft., depth East side 22 ft., West side 19 ft. Dock used for loading sugar and molasses; also for fuel oil discharge or heavy cargo.

Cayo Mambi Dock: length 200 ft., depth 14 ft. Dock used in discharge of coastwise merchandise.

Docks have railroad tracks of non-standard gauge. Punta Gorda Dock has 4 inlet tracks only. Cayo Mambi has 2 tracks.

STEVEDORES: Working periods: Monday to Friday 0700/1100 – 1300/1700 hrs.; Saturday 0700/1100 hrs.; Sunday no work performed.

Raw sugar: 975 sugar bags loaded per gang period. 6 sugar bags loaded per sling.

Refined sugar: 1,875 bags of 100 lb., loaded per gang period. 12 bags of 100-lb. type loaded per sling.

General Cargo: Working periods same as for sugar.

TANKERS: Molasses average pumping rate: 20,000 g.p.h. Fuel oil average pumping rate: 11,750 b.p.h.

COMMUNICATIONS: Long-distance telephone communication at sugar mill. Radio service Inalambrica and Government telegraph. Interior telephone communication between sugar mill yard and port.

Air service at Cayo Mambi. Vessels can communicate with Cayo Mambi by Government telegraph.

FRESH WATER: Can be supplied at Punta Gorda, delivery by pipe-line at rate of 5 t.p.h.

FUEL/REPAIRS: Not available.

MEDICAL: There is a hospital where sick crew members can receive attention in urgent cases. For serious cases, sick men are sent to Nicaro Hospital or to Santiago de Cuba.

AUTHORITIES: Port Doctor and Immigration Inspectors located at Sagua de Tanamo. Captain of Port and Custom House located at Cayo Mambi. Custom House and Captain of Port are Delegations of Antilla.

Entry and sailing clearances attended by Cayo Mambi Delegation Office. Port Authorities travel from Cayo Mambi to Punta Gorda by railroad, thereafter by launch to the anchorage.

SUB-AGENT: Empresa de la Industria Azucarera de Oriente, Central Frank Pais (Tanamo), Cayo Mambi, Oriente, Cables: "Franpa Cayo Mambi". Tel. 2 (night: Zona 2). Central Switchboard.

VITA (sub-port of Gibara – Oriente Province): 21.05 N. 75.57 W.

PILOTAGE: Pilots board vessels 3 miles from entrance channel. Pilot station located at Vita. Interior telephone communication. Distance from place where Pilots board vessels to dock: 5 miles.

APPROACHES: Owing to narrowness of channel, turns may be considered as dangerous for vessels over 450 ft. length.

RESTRICTIONS: Entry and sailing only during daylight.

MAX. SIZE: Max. draft with which vessels can enter/sail is 27 ft. at high tide and 26 ft. at low tide. Max. length 500 ft. (although vessels with length of 550 ft. have entered this port).

BERTHING: Dock: length 300 ft., depth 26 ft. Vessels drawing 26 ft. 06 in. or 27 ft., touch bottom. Loading of sugar and molasses and discharge of fuel. Only one railroad track of non-standard gauge.

STEVEDORES: Working periods: Monday to Friday 0700/1100 – 1300/1700 hrs., Saturday 0700/1100 hrs.

800–1,100 sugar bags loaded per gang period. Four sugar bags are loaded per sling.

TANKERS: Average pumping rate (molasses) 25,000 g.p.h.

COMMUNICATIONS: Long-distance telephone, post and telegraph services.

MEDICAL: No hospital at Vita. Sick crew members can receive attention at Gibara Hospital. Port Doctor at Santa Lucia, Oriente.

FUEL/REPAIRS: Not available.

FRESH WATER: Can only be supplied in exceptional cases. Delivery by 2-in. diameter pipe, by gravity. Delivery average 3 t.p.h. Recommended that Masters always check availability in advance.

AUTHORITIES: Immigration at Chaparra, who travels to Vita on ship's arrival advice. Captain of Port at sub-port of Vita. Gibara is the Customs Official Port having Custom Delegation at sub-port of Vita. Vessels can proceed directly to Vita where they are cleared by Authorities.

SUB-AGENT: Empresa de la Industria Azucarera de Oriente, Central Rafael Freyre (antes Santa Lucia), Oriente. Cables: "Rafy Santa Lucia Oriente." Tel. Dock 43–3. Centre 37–1. Home 28.

NOTES

Please also advise Shipping Guides Ltd.

Cyprus

DHEKELIA: 34.58 N. 33.44 E.

Sovereign Base Area

DOCUMENTS:
- 3 Crew Lists.
- 4 Passenger Lists.
- 1 Arrival Declaration.
- 1 Crew Declaration.
- 1 Store List (for cigarettes, spirits, etc.).
- 2 Manifests (Customs forms).

PILOTAGE: Not compulsory but strongly recommended. The tanker berth is situated in open roadstead. Pilot available through Harbour Master at Lornaea.

MAX. SIZE: Tankers up to 560 ft. length with max. draft 30 ft.

HEALTH: Pratique granted by Health Authorities after boarding on arrival. No pratique necessary when vessel arrives from another port in Cyprus.

RADIO: Messages through Cyprus Radio, call sign 5BA.

TUGS: None available and not required.

BERTHING: One conventional buoy mooring for tanker discharging fuel oil to Dhekelia Power Station. Depth of water 10.7 m.

MEDICAL: Necessary for Agent to receive advance notice of medical attention required. Hospital facilities available.

DENSITY: 1025.

FRESH WATER: Not available.

FUEL: Not available.

CUSTOMS ALLOWANCES: See "Limassol".

IDENTIFICATION CARDS: When on shore leave, seamen's books required.

TIME: GMT plus 2 hours. No changes during the year.

FAMAGUSTA: 35.07 N. 33.57 E.

Presently under military occupation by Turkey, the port of Famagusta is closed to navigation having been declared an illegal port of entry by the Government of Cyprus.

KARAVOSTASSI: 35.08 N. 32.49 E.

"Presently under military occupation by Turkey, the Terminal of Karavostassi is closed to navigation having been declared an illegal port of entry by the Government of Cyprus"

LARNACA: 34.55 N. 33.39 E.

DOCUMENTS:
- 4 Crew Lists
- 4 Passenger Lists
- 4 Transit Passenger Lists for passenger ships only
- 1 Arrival Declaration
- 1 Crew Declaration for dutiable goods
- 3 Stores Lists (cigarettes, spirits etc.)
- 2 Manifests (Customs forms)
- 1 Customs General Declaration
- 1 Fire Arms Declaration
- 1 Health Declaration

PILOTAGE: Ships are not allowed to enter the port or berth at the mooring buoys outside the breakwater port without Pilot, unless permission is granted by the Port Authority. Port Authority Pilot boards vessel at roadstead. Master must give 24 hour's notice of ETA to vessel's Agents to enable them inform the Port Manager in time. Pilot boat is of light grey colour flying Pilot flag. Pilot may be contacted on VHF Channel 16 during working hours. Pilot's Telegraphic Address is: Port Manager, Larnaca, Cyprus. Tel.: 041-53563.

ANCHORAGE: Open roadstead.

RESTRICTIONS: See "Max. Size" and "Berthing". Rise of tide up to 1.5 ft.

MAX. SIZE: For berthing in the port, vessels must not exceed 500 ft. L.O.A. However vessels of few feet in excess may receive berthing permission if vessel's manoeuvrability and prevailing weather conditions permit.

The port is dredged to 31 ft. (9.5 m.) Max. draft allowed 9 m. The height of the quay above sea level is 2.30 m.

Tankers discharge outside port at mooring buoys. Draft up to 32 ft. Max. L.O.A. 600 ft.

HEALTH: Pratique is required at Cyprus first port of call only. Pratique is granted either before or after berthing as appropriate.

RADIO: Cables sent through "Cyprus Radio", call sign: 5BA.

RADAR/VHF: Port Manager Larnaca and Pilot service on VHF Channel 16.

TUGS: Port Authority tugs join vessels outside breakwater using ship's lines.

BERTHING: Vessels may berth inside port between 0600 hrs. and sunset, but may unberth and sail until midnight. Cargo vessels are allowed to berth during night-time provided berth space is available and vessel will immediately operate with at least 1 gang.

Quay length; (a) Main quay 1,060 ft. (326 m.) and (b) Floating pontoon quay 656 ft. (200 m.).

CRANES: 9 mobile cranes 2 to 15 ton, 1 – 35 ton level luffing crane.

BULK CARGO FACILITIES: Not available.

SPECIALISED CARGO-HANDLING FACILITIES: Ro-Ro and containers facilities available.

BRIDGES: None.

STEVEDORES: 24 hours notice of ETA to Agent is required to enable him arrange gangs.

MEDICAL: It is necessary for Agent to receive advance notice of at least 2–3 hours before vessel's arrival. Hospital facilities constantly available. Smallpox vaccination is necessary; other inoculations or vaccinations are required according to prevailing circumstances.

TANKERS: Diameter of discharge lines up to 12 in. Max. draft 32 ft. Discharging takes place at mooring buoys outside port. Position of buoys 34° 54′ 75″ N., 33° 39′ E. No slop discharge facilities.

Buoy berths outside port:

Synergas Co-Operative Society Ltd: Depth of water 11.0 m. Pipe-lines 2. Fresh water not available. Pilot available through Port Manager at Larnaca. Position of buoys, 34° 55.5′ N., 33° 40′ E.

Petrolina Ltd: Depth of water at end of pipe-line 11.0 m. Pipelines 3. Pilot available through Port Manager at Larnaca. Position of buoys 34° 55′ N., 33° 39′ E.

Shell Company of Cyprus Ltd: Depth of water 11.0 m. Pipe-lines one 8 in. white oil line jointly owned by Shell, Mobil and Esso. Fresh water available by pipe-line. Pilot available through Port Manager at Larnaca. Position of buoys, 34° 54.75′ N., 33° 39′ E.

Agip: Depth of water 6 m. (approx.). Pipe-lines two. Fresh water not available. Pilot available through Port Manager at Larnaca. Position of buoys, 34° 55.5′ N., 33° 39.5′ E.

Cyprus Petroleum Refinery Larnaca: Depth of water 11.0 m. Pipe-lines 1×12 in. for crude oil and 1×8 in. for ballast. Fresh water available by pipe-line. Pilots available through Port Manager at Larnaca. Position of buoys 34° 54.75′ N., 33° 39′ E.

Mobil Oil Cyprus Ltd: Depth of water, 11.0 m.

Pipe-lines: 1×8 in., Jointly owned by Mobil, Shell and Esso.
1×4 in., LPG Line owned by Esso.
1×4 in., Vapour Line owned by Esso.
1×3 in., LPG Line owned by Mobil.
1×3 in., Vapour Line owned by Mobil.
1×2 in., Fresh water underwater pipe-line.

DENSITY: 1025.

FRESH WATER: Facilities available on quay. Delivery by hoses at about 50 t.p.h.

FUEL: 12 hour's advance notice is required. Available in unlimited quantities.

FIRE PRECAUTIONS: No tankers are allowed in the port. Vessels and operators must comply with internationally applicable regulations concerning explosives and dangerous goods.

CONSULS: Italy, Sweden, Denmark, Portugal, Finland.

REPAIRS: Minor repairs and overhauls may be carried out.

DRY DOCKS: Not available.

SURVEYORS: Lloyds, Bureau Veritas, Registro Italiano Navale, Germanischer Lloyd.

GANGWAY/ DECK WATCHMEN: Not necessary but available.

HATCHES: Opened and closed by crew.

CUSTOMS ALLOWANCES: 50 grams tobacco or 40 cigarettes, and 0.25 litres spirits, 0.25 litres wines, per man per day.

For reasons of administrative convenience, issues of high duty goods for use by Crew on board will be made every 3 days, beginning with the first day of the ship's arrival in Cyprus waters. For each member of the Crew (other than the Master, the Chief Officer and the Chief Steward) each issue will consist of, 120 cigarettes or an equivalent quantity of other tobacco goods. 1 bottle of spirits, and 3 bottles of wine.

Each issue for the Master, the Chief Officer and the Chief Steward of ocean-going vessels will consist of: 200 cigarettes, 2 bottles of spirits and reasonable quantity of wine they may request.

Concessions to Crew landing from ship. On coming ashore, for a short period, 50 grams of tobacco, or 40 cigarettes per day or part thereof.

The above allowances are in force for all Cyprus ports.

CARGO GEAR: Load or discharge may be effected either by ship's or shore gear. 35 ton heavy lift crane available.

REPATRIATION: Facilities are available.

AIRPORT: Larnaca International Airport 3 miles from Larnaca Port. Daily flights to Europe and Middle East.

TIME: GMT plus 2 hours.

HOLIDAYS: Every Sunday; 1st January; 6th January; 25th March; 1st May; 28th October; 29th October; Good Friday; Saturday following Good Friday; Easter Monday; First Day of Kurban Bairam; Birthday of Prophet; First Day of Ramazan Bairam; Christmas Day; Boxing Day.

Work can be arranged on any holiday other than New Year's Day, Christmas Day, and Easter Sunday.

POLICE/AMBULANCE/FIRE TEL.: Police 52001, Hospital (ambulance) 52007, Fire 52683.

TELEPHONES: Line available for placing telephone on board.

SERVICES: Compass adjusting; Radar; Radio telephones; Gyro compass repairs; hull scraping and engine repairs.

SHORE LEAVE: Crew members are allowed ashore.

IDENTIFICATION CARDS: Shore leave passes are issued. Seaman's Book or Passport required whilst ashore.

REGULATIONS: Port Manager's permission is required for: immobilising engine, cleaning or repairs whilst vessel alongside quay, lowering lifeboats and use of ship's radio. Port and customs clearance required before departure. Cyprus flag to be hoisted on mast from 0800 hrs. to sunset. Landing of dogs or other animals not allowed; also discharging of fruits, vegetables and eggs unless authorised by Produce Inspection Office. Disposal of garbage and waste strictly prohibited both in port and Cyprus waters.
DELAYS: According to prevailing circumstances but normally no delays.
DEVELOPMENTS: Extension of quay length by 340 m. Specialised ro-ro berth. Additional 4,000 sq.m. of paved open stacking area for general cargo and containers. Additional 9200 sq.m. of covered storage space. New luggage hall. New administration building.
GENERAL: Weather conditions permit entrance and working of ships all the year round.
AUTHORITY: Port Manager, Cyprus Port Authority, Larnaca.

LATCHI (Limni Mines): 35.03 N. 32.27 E.

DOCUMENTS: See "Limassol".
PILOTAGE: No Pilot available. Vessels chartered for Company advise ETA via Cyprus Radio to "Limni Poliscyprus". Anchorage 0.5 mile North of Mavroli Pier. During daylight hours Company launch leads vessels to anchorage.
ANCHORAGE: As above, depth 0.5 mile from pier is 10 fathoms.
MAX. SIZE: No restrictions on size.
HEALTH: All necessary action to obtain pratique made by Agent in the event of any suspected disease on board, necessary action and precautions taken by Health Authorities.
RADIO: Cyprus Radio – call sign BA on 500 or radio telephone 2182.
TUGS: None available.
BERTHING: Mavroli Pier in Khrysokhou Bay, Cyprus, in position 35° 03′ 15″ N. 32° 27′ 10″ E. bearing 072° approximately 3.2 miles from Latchi. Necessary to have Cyprus flag, and to have gangway and not a rope ladder for Authorities and stevedores to board.
STEVEDORES: ETA advice required order arrange gangs at least 24 hours. Loading rate 2,000 tons per day. Loading from 6 barges, average capacity 45 tons each.
MEDICAL: Agent to receive 24 hours notice. Hospital facilities available at Ktima, 24 miles from Terminal at Limni. Each member of crew to possess valid vaccination certificate.
DENSITY: 1025.
FRESH WATER: None available.
FUEL: Not available.
GANGWAY/DECK WATCHMEN: Unnecessary.
OPENING/CLOSING HATCHES: Done by the crew.
CUSTOMS ALLOWANCES: See "Limassol".
IDENTIFICATION CARDS: Required.
CONSULS: No consuls at Terminal.
REPAIRS: No repairs can be carried out.
REPATRIATION: Can be arranged through Nicosia Airport.
AIRPORT: Nicosia Airport 68 miles away, served by regular airlines.
TIME: GMT plus 2 hours. Permanent.
HOLIDAYS: See "Limassol".
POLICE/AMBULANCE/FIRE: Such services arranged through Agent.
TELEPHONES: No arrangements exist for placing on board.
SHORE LEAVE: Landing permits obtainable from local Police Authorities by lodging passports or seamen's books.

LIMASSOL: 34.40 N. 33.03 E.

DOCUMENTS:
- 1 Arrival Declaration.
- 4 Crew Lists.
- 4 Passenger Lists and 1 Transit Passenger List (the latter in case of passenger vessels).
- 3 Transit Passenger Lists.
- 1 Fire Arms Declaration.
- 1 Stores Declaration.
- 1 Declaration signed by each member of Crew stating dutiable goods in their possession.
- 1 Form of appointment of Agent.
- 1 Maritime Declaration of Health.

PILOTAGE: Ships are not allowed to enter the port or to berth at the mooring buoys outside the breakwater port without Pilot, unless permission is granted by the Port Authority. Port Authority Pilot boards vessel at roadstead. Master must give 24 hour's notice of ETA to vessel's Agents to enable them inform the Port Manager in time. Pilot's Telegraphic Address is Port Manager, Limassol, Cyprus. Tel.: 051-65246.
ANCHORAGE: No specific boundary but ships usually anchor about 0.5 mile S.E. of lighter basin entrance where depth is 8 fathoms.
RESTRICTIONS: See "Max. Size" and "Berthing". Rise of tide up to 1.5 ft.
MAX. SIZE: *Old Port:* Vessels berthing must not exceed 265 ft. LOA and 14 ft. draft.

New Breakwater Port: Depth alongside 11 m. Max. draft 10.5 m. No LOA limit on ships entering and berthing. The height of quay above sea level is 2.30 m.

HEALTH: Pratique is required at first Cyprus port of call only. Pratique is granted either before or after berthing as appropriate.
RADIO: Cables sent through "Cyprus Radio", call sign: 5BA.
RADAR/VHF: No port radar service. Port Manager and Pilots equipped with VHF radiotelephone operating on Channels 16 and 14 during office hours only.
TUGS: Port Authority tugs join vessels outside breakwater using ships' lines.
BERTHING: Vessels may berth inside port between 0600 hrs. and sunset, but may unberth and sail until midnight. Cargo vessels are allowed to berth during night-time provided berth space is available and vessels will immediately operate with at least 1 gang. Quay length available 800 m.
CRANES: Floating crane with capacity of 60 tons at 22 m. and 15 tons at 30 m. Luffing Crane on rails with maximum capacity of 35/5 tons at 26/30 m. 16 mobile cranes 3 to 16 ton. 6 straddle van 4 carriers.
STEVEDORES: 24 hours notice of ETA to Agent is required to enable him arrange gangs.
MEDICAL: It is necessary for Agent to receive advance notice of at least 2–3 hours before vessel's arrival. Hospital facilities constantly available. Smallpox vaccination is necessary; other inoculations or vaccinations are required according to prevailing circumstances.
TANKERS: Not allowed to berth in the port. No slop discharge facilities.
FRESH WATER: Facilities available on quay.
FUEL: 12 hours' advance notice is required. Available in unlimited quantities.
FIRE PRECAUTIONS: No tankers are allowed in the port. Vessels and operations must comply with internationally applicable regulations concerning explosives and dangerous goods.
CONSULS: Belgium, Holland, Italy and France.
REPAIRS: A floating dock 66 m. long and 18 m. wide capable of lifting a 1,200 tons light ship is in operation.
SURVEYORS: Lloyds, Bureau Veritas, Registro Italiano Navale, Germanischer Lloyd.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: By crew or stevedores.
CUSTOMS ALLOWANCES: 50 grams tobacco or 40 cigarettes, and 0.25 litres spirits, 0.25 litres wines, per man per day.

For reasons of administrative convenience, issues of high duty goods for use by crew on board will be made every 3 days, beginning with the first day of the ship's arrival in Cyprus waters. For each member of the crew (other than the Master, the Chief Officer and the Chief Steward) each issue will consist of, 120 cigarettes or an equivalent quantity of other tobacco goods, 1 bottle of spirits and 3 bottles of wine. Each issue for the Master, the Chief Officer and the Chief Steward of ocean-going vessels will consist of: 200 cigarettes, 2 bottles of spirits and reasonable quantity of wine they may request. Concessions to crew landing from ship. On coming ashore, for a short period, 50 grams of tobacco, or 40 cigarettes per day or part thereof.

CARGO GEAR: Load or discharge may be effected either by ship or shore gear. 35 tons heavy lift crane and 60 tons floating crane available.
REPATRIATION: Facilities suitable for effecting crew changes and arranging any necessary repatriations. Usually arranged with Agent.
AIRPORT: Larnaca International Airport served by regular lines, situated 43 miles from Limassol.
TIME: GMT plus 2 hours. Permanent.
HOLIDAYS: Every Sunday; 1st January; 6th January; 25th March; 1st May; 28th October; 29th October; Good Friday; Easter Monday; First Day of Kurban Bairam; Birthday of Prophet; First Day of Ramazan Bairam; Christmas Day; Boxing Day. Work can be arranged on any holiday other than New Year's Day, Christmas Day, and Easter Sunday.
POLICE/AMBULANCE/FIRE: Tel: Police 63171; Ambulance 63111, Fire Brigade 71939 or 999.
TELEPHONES: Available on request, for placing on board.
SERVICES: Compass adjusting, servicing of radar, R/T, echo sounders.
SHORE LEAVE: Allowed.
IDENTIFICATION CARDS: Shore leave passes are issued. Seaman's Book or Passport required whilst ashore.
REGULATIONS: Port Manager's permission is required for: immobilising engine, cleaning or repairs whilst vessel alongside quay, lowering lifeboats and use of ship's radio. Port and Customs clearance required before departure. Cyprus flag to be hoisted on mast from 0800 hrs. to sunset. Landing of dogs or other animals not allowed; also discharging of fruits, vegetables and eggs unless authorised by Produce Inspection Office. Disposal of garbage and waste strictly prohibited both in port and Cyprus waters.
DELAYS: According to prevailing circumstances but normally no delays.
DEVELOPMENT: Extension of quay length by 480 m. Specialised ro-ro and container berths. Additional 30,000 sq.m. of paved open stacking area and additional 90,000 sq.m. of paved container yard. Additional 25,000 sq.m. of closed storage space. New passenger terminal. New administration building.

The above development with the exception of 17,000 sq.m. of closed storage space, which will be completed by the end of 1978, will begin in 1979.

GENERAL: Weather conditions permit entrance and working of ships all the year round.
AUTHORITY: Port Manager, Cyprus Ports Authority, Limassol.

MONI: 34.42 N. 33.11 E.

PILOTAGE: Pilots available from Limassol.
RADIO: Communication between ship and shore by Walkie-Talkie after berthing.
BERTHING: *Electricity Authority of Cyprus:* Buoy berth for oil. Min. depth of water 18.29 m. One pipe-line. Position of buoys 34° 41′ 50″ N., 33° 10′ 36″ E.
Cyprus Cement Factory: Depth of water 9.75 m. One pipe-line. Position of buoys, 34° 41′ 50″ N., 33° 10′ 36″ E.
FRESH WATER: By barge from Limassol, rate 10 t.p.h.

VASSILIKO BAY: 34.43 N. 33.19 E.

LOCATION: 13.5 miles due East of Limassol on South coast of Cyprus, and 1.5 miles West of Zyghi.
PILOTAGE: Company's Pilot available for berthing and shifting operations.
PYLON: The pylon, diameter of 34 ft. fitted with mechanism which enables buckets conveying ore along ropeway, to be emptied automatically through a chute into holds of ships.
MAX. SIZE: Ore carriers of 12,000 d.w.t. and over can be accommodated. Max. permissible height of ship between sea level and top of hatches (vessel in full ballast) 25 ft. Max. length 450 ft. Max. beam 60 ft.
BERTHING: Depth of water at pylon 30 ft., but if necessary ships may berth further out where depth 31–32 ft. In such cases, double chute used. Height of articulation of chute 49 ft. above sea level; height of unloading tip varies according type chute used. Bottom of sea near pylon, sandy.
LOADING: Loading of ores (pyrites and gypsum-rock) effected through an aerial maritime ropeway line, which starts at a point close to the shore and extends over a distance of 1,750 ft. in the sea to a reinforced concrete pylon. Ropeway cables supported at 3 intermediate points by steel trestles.
CAPACITY: Installation has loading capacity of 3,500/4,000 tons pyrites and 2,500/3,000 tons gypsum rock per 24 consecutive hours; electrically operated and all ores automatically weighed at loading point by means of electric Avery machine.
TANKERS: One pipe-line to buoy berth, depth of water, 12.19 m. Position of buoys, 34° 42′ 42″ N., 33° 18′ 42″ E.
FRESH WATER: By barge from Limassol.
HOLIDAYS: All weekends and 18 days throughout the year.

NOTES

Please also advise Shipping Guides Ltd.

Denmark

GENERAL: A routing system has been established, so ships with a draft up to 17 m. (55.77 ft.) can pass the Great Belt. Ships bound for the Baltic are restricted to a draft of 15 m. (49.21 ft.) owing to shallow waters N.E. of Gedser.

For the passage through Danish waters by ships with a d.w.t. of more than 40,000 tons or with a draft of 13 m. or more, we would like to draw your attention to the "IMCO–recommendation of Nov. '75 on navigation through the entrances to the Baltic Sea", and to the radio reporting system established by the Danish Ministry of Commerce.

AABENRAA: 55.05 N. 09.25 E. (See Plan Book)

DOCUMENTS: See "Kalundborg".
PILOTAGE: Telegraphic address: "Pilot – Aabenraa". Short notice about 2/4 hours – VHF Channel 16. Small red motor-boat flying International pilot flag. Normally located middle of Aabenraa Fjord. On request Pilot comes aboard vessel between buoys 3–4, way 25.

Bigger ships usually take Pilot by Skaw L/V. Pilots to be ordered by ETA-telegrams to "Skawpilot Skagen", at least 12 hours in advance. Skawpilot listening on VHF Channel 16.
ANCHORAGES: Aabenraa Fjord or road. Depths: about 75/80 ft.
RESTRICTIONS: See "General" before first port.
MAX. SIZE: Length and breadth no restrictions. Draft limit: max. 36 ft. at Aabenraa, max. 32 ft. at Ensted Harbour (Power Station). Also see "Ensted". No tide – occasionally low water of 3–5 ft. in heavy gales from West. Entry day or night.
HEALTH: Pratique granted by Customs Officers. In event of disease or fever on board, vessel's Agent to be informed before arrival.
RADIO: Blavand Radio or Lyngby Radio.
TUGS: Usually not necessary, but pilot boat may assist at reasonable rates.

Large vessels may require towage assistance on entering and leaving Enstedvaerkets Harbour, and in such cases a few days notice is required to call a Svitzer-tug.
BERTHING: Length of quays, 1,700 m. Depths 5.5 m. – 11.0 m. Two electric travelling cranes, capacity, 5 tons at 20 m. One stationary electric crane, capacity 20 tons at 4 m. from quay wall. One Coles mobile crane, capacity 11 tons at 3.05 m.
STEVEDORES: Stevedores informed by Agent.
MEDICAL: A few hours notice in order to arrange for doctor to come on board. Hospital in Aabenraa.
TANKERS: Diameter of discharge line: 10 in. 2 berths – draft Aabenraa berth 36 ft. – draft Power Station berth 32 ft., normal water level.
TIDE: No tide – vessels arriving and sailing by day and night.
FRESH WATER: Day and night from shore line, 10/15 t.p.h.
FUEL: All grades available. Minimum 24 hours notice.
OPENING/CLOSING HATCHES: Normally done by crew.
CERTIFICATES:
Tonnage Certificate.
Radio Certificate.
Load-line Certifcate.
Safety Equipment Certificate.
Deratting Certificate.
CUSTOMS ALLOWANCES: Tobacco, 100 cigarettes per man for 3 days. Wine and/or Spirits, 1 bottle spirit or wine per man.
IDENTIFICATION CARDS: Not needed.
CONSULS: German; Finnish; Norwegian; Swedish; British.
REPAIRS: Available.
DRY DOCKS: One dock – length 100 ft., breadth 54 ft., depths on blocks 12 ft., lifting capacity power 800 tons.
REPATRIATION: Facilities exist.
AIRPORT: About 30 km. Feeding line for Copenhagen – daily departure.
TIME: Local time is GMT plus 1 hour. No alterations to clocks.
POLICE/AMBULANCE/FIRE: Dial "000".
TELEPHONES: None available for placing on board.
SHORE LEAVE: Crew members allowed ashore.
DELAYS: Normally no delay except during severe Winters due to ice between mid December and end March.
AUTHORITY: Harbour Master.

AALBORG: 57.03 N. 09.55 E. (See Plan Book)

DOCUMENTS:
Ship's Register.
Load-line Certificate. (All vessels over 150 GRT.)
Road Safety Certificate.
Safety Equipment Certificate.
Derat Certificate or Exemption.
1 Crew List.
Stores List.
Crew Personal Effects List.
Cargo Manifest or Bills of Lading.
PILOTAGE: Compulsory at Hals Bar for ships drawing more than 5 m. Pilot boards at Hals Bar Light. Pilot boat equipped with VHF Channel 16. The Western entrance at Logstor is only navigable in daylight for vessels under 4 m. draft.

Bigger ships usually take Pilot by Skaw L/V. Pilots to be ordered by ETA-telegrams to "Skawpilot Skagen", at least 12 hours in advance. Skawpilot listening on VHF Channel 16.
ANCHORAGE: Vessels may anchor in Limfjord or Aalborg Roads, depths 9 — 15 m.
RESTRICTIONS: The port is situated in Limfjord, 16 miles from entrance at Hals. Controlling factor is depth at Hals Bar. 9.5 m. MLW. Night entry permitted. Also see "General" before first port.
MAX. SIZE: Maximum draft for crossing Hals Bar 8.5 m.
HEALTH: Pratique granted by Customs Officers who bring Health Declaration for Masters to complete. In event of suspected disease or fever on board radio details to Agent before arrival. When vessel arrives from port outside of Europe and U.S.A. and has been less than 14 days at sea, all crew members require valid smallpox vaccination certificates.
RADIO; Radio stations to be used: Skagen and Lyngby, Port Authority, Pilot station. Tugs and Bridges can be contacted on VHF Channel 16.
TUGS: Eight tugs available from 250 to 1,400 h.p. Not compulsory except through bridges for vessels over 1,500 d.w.t.
BERTHING: Aalborg on North and South sides of Limfjord. Total quayage 11.4 km., whereof public quays 10.1 km. All main quays suitable for vessels able to cross Hals Bar. Depths alongside 7.5 to 10.0 m.

Vendsysselvaerket power station wharf, depth 10.0 m.
Lindholm Pier Cement factory wharf, depth 7.8 m.
Rordal Cement factory wharf, depth 7.5 — 9.3 m.

BRIDGES: Two lift bridges cross Western end of Aalborg harbour. Horizontal opening 30 m. Only vessels bound for Lindholm Pier are affected.
MEDICAL: Doctors, hospital facilities available.
FRESH WATER: Supplied by pipe-line at all berths.
FUEL: All grades available.
DEVELOPMENTS: Aalborg has considerable areas under development for industry. In connection with this, preparations are being made for the building of new public harbour facilities. On the South bank of the fjord the Port Authority has available a 3.2 km stretch of coast with an area of approx. 200 hectares. This area is in connection with a new industrial and residential district of approx. 400 hectares. According to present plans approx. 7,000 m. of new quayage can be built here. Investments are estimated at 300 mill. Kr. Factories within the electronic and textile sectors are already established here and a continuous expansion goes on. On the site a special harbour with a quayage of 660 m. and with facilities for unit load ships as well as conventional cargo ships, with warehouses and administration blocks etc. was constructed during 1972 as base port for the Royal Greenland Trade Department's routes calling at all ports in Greenland. Enterprises undertaking construction, repairs and maintenance of oil rigs etc., for offshore activities have also settled on this site. On the North bank of the fjord East of the existing harbour areas approx. 140 hectares have been laid out as a new harbour and industrial area. This area has coast length of approx. 3.5 km.
DECK WATCHMEN: Available but not compulsory.
OPENING/CLOSING HATCHES: Normally by crew with assistance of stevedores.
IDENTIFICATION CARDS: Not required.
CONSULS:

Belgium	Tel.	(08)	13 23 33
Brazil	,,	,,	13 12 33
Finland	,,	,,	13 30 33
France	,,	,,	12 09 00
Great Britain	,,	,,	13 12 33
Greece	,,	,,	13 31 00
Iceland	,,	,,	12 44 33
Netherlands	,,	,,	13 42 33
Norway	,,	,,	12 14 24
Spain	,,	,,	18 50 99
Sweden	,,	,,	12 00 51

REPAIRS: All hull and machinery repairs can be effected.
DRY DOCKS: One dry dock for vessels up to 119 m. long. Three floating docks max. capacity 20,000 tons (70,000 d.w.t.).
CUSTOMS ALLOWANCES: 200 cigarettes, 3 litres of wine and 1 bottle spirits permitted out of bond for each man.
TIME: GMT plus 1 hour. No alterations during the year.
HOLIDAYS: New Year's Day; Maundy Thursday; Good Friday; Easter Monday; Prayer Day (May 2nd); Ascension Day; Whit Monday; Christmas Day; Boxing Day. Half-holidays; May 1st, June 5th and December 24th.
REPATRIATION: Aalborg Sofarts Service (Seamen's Service) Tel. (08) 17 12 12.
POLICE/AMBULANCE/FIRE: Tel. 000
TELEPHONES: Installed by request at certain quays.
SHORE LEAVE: No restrictions.
AIRPORT: Situated 3 miles from town centre.
AUTHORITY: Aalborg Havnevaesen.
AGENT: Chr. Jensen, Soeborg & Benthin's EFTF. Slotsgade 35, PO Box 160, 9100 Aalborg. Telex 69735. Cables "Soeborg". Tel. (08) 122566.

ARHUS: 56.09 N. 10.13 E. (See Plan Book)

DOCUMENTS:

Ship's Register.
Derating Certificate.
Load Line Certificate (all vessels above 150 g.r.t.).
Radio and Equipment Security Certificate (all cargo vessels on 500 g.r.t. and above).
Customs Passport from last port of call.
Spirits and Tobacco List specifying stock in hand for ship and crew.

PILOTAGE: Not compulsory. Harbour Pilot normally boards 1-2 miles outside port.

Bigger ships usually take Pilot by Skaw L/V. Pilots to be ordered by ETA-telegrams to "Skawpilot Skagen", at least 12 hours in advance. Skawpilot listening on VHF Channel 16.

ANCHORAGE: Anchorage in roads – good holding ground. Nature of bottom: clay.

RESTRICTIONS: No restrictions. Night entry permitted. Also see "General" before first port.

MAX. SIZE: Oil port 36 ft. General cargo port up to 33 ft. Container terminal up to 36 ft. No tide.

HEALTH: Necessary formalities carried out by customs on arrival.

RADIO: Radio stations to be used: Skagen and Lyngby. Pilot station and tugs can be contacted on VHF Channel 12 and 13 – emergency 16.

TUGS: Call by VHF.

CARGO HANDLING FACILITIES: 9 cranes for coal, fertilisers, sulphur, ore, etc.; max. capacity per crane, 120 t.p.h. 10 cargo handling cranes up to 2.5 tons and 9 cranes up to 5 tons. One floating crane up to 20 tons and 3 mobile cranes up to 4 tons.

Container Terminal: Min. depth of water 10 m. (33 ft.). Total quay length 816 m. (2,677 ft.). 1 cargo handling and container crane up to 50 tons. 2 gantry container cranes up to 40 tons. Fork lifts up to 32 tons.

Roll-on/roll-off: 2 moveable and 3 solid roll-on/roll-off berths. Fork lifts up to 32 tons. Several berths for liquid chemicals and LPG carriers.

Private Cranes: 4 travelling cranes on carriage bridges for handling of coal, coke, fertilizer, and broken stone, etc., capacities 5–7.5 tons. 3 travelling cranes on fixed bridges for handling of sand, stone and gravel, etc., capacities 2.5–3.3 tons. 2 travelling cranes on carriage bridges for handling of general cargo, capacity 1.5 tons.

Private Suction Plants, etc.: 4 grain suction plants, capacities of 60–100 t.p.h. 1 grain elevator, capacity of 35 t.p.h. 2 grain loading pipes. 6 cup elevators for copra and soya beans (80 t.p.h. each). 4 suction elevators for copra and soya beans (125 t.p.h. each). 1 loading pipe for copra and soya beans.

Arhus Stevedore Company: 2×40 ton, 2×30 ton, fork trucks with telescopic yoke for top lifting of containers. 1×32.5 ton, 1×23.5 ton, fork trucks with top lifting yoke for containers. 1×12.5 ton, 26×3–7 ton fork trucks. 5×3 ton electric pallet lifters. 5 shovel trucks for stowing. 7 terminal tractors with Appurtenant swan's necks. 18 terminal carriages.

STEVEDORES: Available. Ordered by Agents.

Normal working hours: Mondays/Fridays 07.00–16.30 hrs. Work on Saturdays, Sundays and Holidays is on full overtime terms only.

Meal hours: 08.30–09.00 and 12.00–13.00 hrs.

Shifts: Labour can be employed Mondays/Fridays at 07.00 hrs. and at 10.00 hrs., although the 07.00 hr. shift is by far the best supported.

On Fridays and on a day preceding a holiday labour can also be employed at 13.00 hrs. (for overtime work generally).

Furthermore labour can be transferred from a completing vessel to another job within normal working hours provided certain union regulations are observed. Crew is not allowed to load, discharge or run the winches under normal circumstances.

Overtime: Can be worked round the clock against overtime pay. The rates for the first 3 hours are plus approximately 50% and all following hours plus 100%.

First shift is from 07.00–21.00 hrs. and next from 21.00–07.00 hrs. the following morning.

Week-end work: Can be ordered as late as Friday 13.00 hrs. (deadline) but ordering during Thursday gives a far better position for making a good arrangement.

MEDICAL: All medical services possible. Call Pilots if medical attendance required aboard.

TANKERS: Discharge lines: 4 in., 6 in., 8 in. and 10 in. Quay 201–203, max. oil discharging 1,200 cu.m./hr. Quay 202 and 124, 1,000 cu.m./hr., and quay 120, 800 cu.m./hr.

FRESH WATER: Most berths supply by shore installations, otherwise barge.

FUEL: All grades available.

FIRE PRECAUTIONS: Tankers discharging: Fire watch. Special harbour fire fighting on tugs.

DEVELOPMENTS: In the Northern port there will be 36–39 ft. depth of water in the future. The newly started project for the new Eastern Division comprises of a land area of 45 hectares, 1,680 m. of quays and up to 39 ft. depth of water.

DECK WATCHMEN: Available, but not compulsory.

OPENING/CLOSING HATCHES: Normally by crew with assistance of stevedores.

IDENTIFICATION CARDS: Not required.

CONSULS: Belgium, Tel. (06) 13.18.55; Brazil, Tel. (06) 12.88.88; Finland (06) 29.21.00; France (06) 11.22.22; Germany (06) 12.32.11; Great Britain (06) 17.66.33; Greece (06) 13.06.55; Iceland (06) 13.40.00; Japan (06) 14.48.00; Netherlands (06) 12.81.88; Norway (06) 14.41.11; Spain (06) 15.57.55; Sweden (06) 27.32.33.

REPAIRS: Most repairs and overhauls possible. See "Dry Docks".

DRY DOCKS: Dannebrog Vaerft A.S. The shipyard possesses a large repair section and specializes, among other things, in extending ships and in undertaking comprehensive re-building. But all kinds of ships' repairs and overhauls of machinery are performed in its modern workshops. It employs a staff of 500–600, and it has recently invested in new cranes, floating docks, and workshops.

The yard's Dock I measures 141 m. and is 24 m. wide. Its capacity is ships up to 167.6 m. long, 22.8 m. wide, and with drafts of 5.8 m. and a maximum net weight of about 8,000 tons corresponding to a d.w.t. of about 16,000 tons. Dock II is 83 m. long and also 24 m. wide. Its maximum capacity is ships of 110 m., a width of 22.8 m., a draft of 5.8 m. and a maximum net weight of 4,000 tons corresponding to about 7,000 d.w.t.

There are also two minor slipways in the Port of Arhus, and the city possesses all sorts of service workshops which are available to ships needing installations or repairs of electronic or mechanical equipment in either the engine room, the catering department, or on deck.

REPATRIATION: Arhus Sofarts Service. Tel. (06) 19.13.33.

AIRPORT: 32 km. – 20 miles from port.

TIME: GMT plus 1 hour (permanent).

HOLIDAYS: 5 day week, but loading and discharging can be effected on Saturdays and Sundays on payment of overtime. See "Copenhagen".

POLICE/AMBULANCE/FIRE: Tel. "000".

TELEPHONES: At several piers.

SHORE LEAVE: No restrictions.

AUTHORITY: Port of Arhus Authority.

ASNAES: 55.40 N. 11.05 E.

PORT LIMITS: When boarded by Harbour Pilot at the Forth of Kalundborg; or when at anchorage at the Forth waiting for berth.

DOCUMENTS:

Ship's Register.
Load Line Certificate.
Safety Radio Certificate.
Safety Equipment Certificate.
Deratting or Exemption Certificate.
Construction Certificate.
Certificate of Insurance or other financial security in respect of civil liability for oil pollution damage.
2 Crew Lists.
Tobacco and Spirit List covering all goods on board belonging to crew, officers, Master, ship's bar or passengers.
Cargo Manifest or Bill of Lading.

Smallpox: When a ship arrives from places outside Europe and USA, and it has been at sea less than 14 days, each member of the crew has to present a valid smallpox certificate to the authorities on arrival.

PILOTAGE: Pilotage not compulsory. Harbour Pilot boards at entrance of Kalundborg Forth; bigger ships usually take Pilot by Skaw lightvessel about 130 miles from Kalundborg. Skaw as well as Harbour Pilots listening on VHF Channel 16.

Pilots to be ordered by ETA-telegram to Agents at least 24 hours in advance.

ANCHORAGE: Large vessels anchor in 16 m. of water outside between Roesnaes and Asnaes; S.W. to N.W. winds cause swell, but holding ground is good.

RESTRICTIONS: No entry restrictions; arrival day and night and no tide with normal winds. Also see "General" before first port.

MAX. SIZE: Oilberth: depth alongside: 13 m. Coalberth: depth alongside: 11 m. Length of quay: 285 m.

HEALTH: No special restrictions as to free pratique, which will be granted by authorities on arrival, however, see "Documents", "Smallpox" – suspected disease or fever must be telegraphed to agents before arrival.

RADIO: Lyngby radio.

VHF: Channel 16 to pilot station (also Skaw Pilot).

RADAR: No radar installations.

TUGS: At Forth of Kalundborg – 2/3 miles from port – ships' lines to be used.

BERTHING: One oil berth: length 200 m. (a further length of ships at abt. 100 m. acceptable for berthing alongside the dolphins). Max. safe arrival draft: 41 ft. (12.5 m.), however, ships of more than 70,000 d.w.t. 40 ft. (12.19 m.) have berthed.

One Coal berth: length 285 m. Max. safe arrival draft: 35 ft. (10.67 m.). 4 cranes available.

DENSITY: Brackish – about 1011.

STEVEDORES: Private stevedores to be ordered through receivers – coal discharge rate per crane per hour: about 200 tons.

MEDICAL: All medical and hospital facilities available. No advance notice necessary.

TANKERS: 2 discharge hoses (a possibility of 3) of 8 ins. each. No slop facilities. Average discharge rate 3,000 t.p.h., max. back pressure 14 kg. Also see "Berthing".

FRESH WATER: Available by pipe-line at the berth. Rate 10 t.p.h.

FUEL: Available by barge or truck.

CONSULS: Swedish and Norwegian at Kalundborg. Others at Copenhagen.

REPAIRS: All types of smaller repairs can be carried out.
DRY DOCKS: No dry dock available.
SURVEYORS: Major Classification Societies represented in Copenhagen. 100 km. from Kalundborg.
GANGWAY/DECK WATCHMEN: Not recommended.
HATCHES: Opening closing hatches to be carried out by crew.
AIRPORT: Nearest at Copenhagen (100 Km.).
CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle spirits.
REPATRIATION: All repatriation can be arranged normally via Copenhagen 100 km. from Kalundborg.
TIME: GMT plus 1 hour. No alterations during the year.
HOLIDAYS: Saturday/Sunday normally no work, also no work on holidays declared as offical Danish holidays.
POLICE/AMBULANCE/FIRE: 0–0–0 all alarms.
TELEPHONES: No telephone connection on board.
SERVICES: No tank-cleaning facilities; all other services to ships can be arranged through specialists from Copenhagen.
SHORE LEAVE: No restrictions for shore leave.
IDENTIFICATION CARDS: No shore passes necessary.
AUTHORITY: Private port owned by: IFV Power Co., Hellerup. Local Office: Asnaes Power Station, Kalundborg.

BANDHOLM: 54.50 N. 11.30 E. (See Plan Book)

DOCUMENTS:
1 Crew List.
1 Passenger List.
1 Stores List.
1 Manifest or Bill of Lading.
PILOTAGE: Not compulsory. Pilot boards vessel at Sea Buoy off Vejroe from pilot vessel, hull painted green and "LODS" on each side of the hull. Pilot ordered through Agent, telephone 03–88 80 11 four hours prior arrival at Sea Buoy. VHF Channel 16. Telephone number of Pilot Station 03–89 49 75/03–89 41 52 day/night.
ANCHORAGE: Near Sea Buoy off Vejroe.
RESTRICTIONS: See "General" before first port.
MAX. SIZE: Max. length 330 ft. draft 17 ft. 6 ins.
HEALTH: Normal quarantine rules.
RADIO: Lyngby Radio or Kiel Radio.
TUGS: None.
BERTHING: Sheltered harbour with 366 m. of stone quays available and easily accessible. Depth of water at entrance 19 ft. Depth at old quays, 4.4 m. At new quay 244 m. there is 5.8 m. average depth. Electric coal crane to discharge 60 t.p.h with grab. Average daily rates: Coal and coke 500–1,000 tons. Grain elevator, loading or discharging capacity 110 t.p.h. storage capacity 25,000 tons.
STEVEDORES: Ordered by Agent. Working hours Monday to Friday 0700 – 1600 hrs. Saturday no work.
MEDICAL: Doctors, hospital facilities available.
GENERAL: Tide normally 1 ft.
FRESH WATER: Supplied from quay installations.
FUEL: Available.
OPENING/CLOSING HATCHES: Carried out by crew.
GANGWAY/DECK WATCHMEN: Not necessary.
CUSTOMS ALLOWANCES: 200 cigarettes, 1 bottle of wine and 1 bottle of spirit permitted out of bond for each man.
IDENTIFICATION CARDS: Not required.
REPAIRS: Small deck and engine repairs possible.
AIRPORT: Maribo Airport, about 15 Km. away.
TIME: GMT plus 1 hour.
HOLIDAYS: See "Copenhagen".
POLICE/AMBULANCE/FIRE: Dial 0–0–0 and ask for Police, Ambulance or Fire Brigade.
TELEPHONE: Not available on board vessels.
SHORE LEAVE: Allowed.
AUTHORITY: Harbour Master.
AGENT: Alfr. Hovmand, Shipbroker, Havnepladsen 10, Bandholm, DK–4930 Maribo. Phone: 03–88 80 11. Telex: 40256 hoban dk. Cable: "Hovmand Bandholm".

COPENHAGEN: 55.42 N. 12.37 E. (See Plan Book)

DOCUMENTS:
1 Crew List.
2 Passenger Lists.
1 List giving stock of stores and provisions.

Customs officers bring form to be signed by Captain indicating that no epidemic diseases are on board. Formal Bill of Health signed by Danish Consul in port of departure is not necessary.
PILOTAGE: Telegr. address: Coppilot-Copenhagen. Tel. Tria 6700. Pilotage not compulsory. ETA: 1 hour. VHF Channel 16. Pilot boats blue with "LODS" on the side. Pilot flag "G" (white light) – VHF. Pilot comes on board at buoy No. 21 (Pilot for Drogden at the same place). Pilot boards by ship's ladder.

Bigger ships usually take Pilot by Skaw L/V. Pilots to be ordered by ETA–telegrams to Skawpilot Skagen, at least 12 hours in advance. Skawpilot listening on VHF Channel 16.
ANCHORAGE: Depth 11 m., 1 mile North of Middelgrund Port.
RESTRICTIONS: See "General" before first port.
MAX. SIZE: Limited by draft only. Depths in the port, 10 m.; in the Oil Harbour, 10.5 m.; at the Oil Pier, 12 m.
HEALTH: See "Documents". If fear of suspected disease or fever: yellow flag – VHF.
RADIO: Lyngby Radio: OXZ. VHF Channel 16 to all installations. ETA cables to Agents and receivers, preferably by Lyngby Radio.
RADAR/VHF: No port radar. VHF Channel 16. Port Radio Beacon 219.9 kHz.
TUGS: Towage not compulsory. Tugs join ships at entrance to port. Ship's hawsers only.
BRIDGES: Larger ships must take Pilot and tugs to pass the bridges down to the South Harbour.
The Knippelsbro and Langebro and Sjaellandsbroen will be closed experimentally for passage as follows:

	Knippelsbro/Langebro	*Sjaellandsbroen*
Monday – Friday	0001 – 0550 hrs. 0615 – 0655 hrs. 0735 – 0900 hrs. 1500 – 1800 hrs.	0001 – 0600 hrs. 0615 – 0655 hrs. 0735 – 0900 hrs. 1500 – 1800 hrs. 2000 – 2400 hrs.
Saturday	0001 – 0655 hrs. 0735 – 0900 hrs. 1200 – 1230 hrs. 1300 – 1330 hrs. 1800 – 2400 hrs.	0001 – 0600 hrs. 0615 – 0655 hrs. 0735 – 0900 hrs. 1200 – 1230 hrs. 1300 – 1330 hrs. 2000 – 2400 hrs.
Sundays and Holidays	0001 – 0800 hrs. 1200 – 1800 hrs. 2000 – 2400 hrs.	
15th May – 15th September		0001 – 0600 hrs. 1000 – 1700 hrs. 2000 – 2400 hrs.
16th September – 14th May		0001 – 0700 hrs. 1000 – 1700 hrs. 1800 – 2400 hrs.
Constitution: 5th June	1200 – 1300 hrs.	1200 – 1300 hrs.
also Christmas Eve 24th December and New Year's Eve 31st December	1800 – 2400 hrs.	1800 – 2400 hrs.

STEVEDORES: ETA earliest possible by VHF and not later than noon on the day before loading or discharging is intended to be commenced.
MEDICAL: No advance notice necessary. Hospitals available.
TANKERS: 10/12 berths according to size.

Provestens Oil Harbour: depth at	Quay 1:	9.0 m.
	Quay 2:	10.5 m.
	Quay 3:	10.5 m.
	Quay 4:	10.5 m.
	Quay 5:	10.5 m.
	Oil Pier:	11.5 m.
	Bunker Pier:	10.0 m.

Length and beam unimportant. Slop barge available.
CONTAINER TERMINAL: At the Levant quay in the free port. Quay length 665 m., depth alongside 10 m. 2 Container cranes capacity 32 tons, also two luffing cranes of 50 tons and 5 tons capacity for general cargo. Horizontal handling by two straddle carriers.
FRESH WATER: From quay or water boat.
FUEL: All grades available. At bunker station, no notice required, delivery 24 hours a day. By lighter in port or in roads; 10 hours notice preferred.
FIRE PRECAUTIONS: Ready hawsers fore and aft. No engine repairs.
GANGWAY/DECK WATCHMEN: Deemed unnecessary.
OPENING/CLOSING HATCHES: To be opened by ship's crew.
CERTIFICATES: To be on board:
Ship's Register.
Radio Safety Certificate.
Safety Equipment Certificate.
International Load Line Certificate.
Deratisation Certificate.
CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes. Wine and Spirits, 1 bottle wine and 1 bottle spirits.
IDENTIFICATION CARDS: Not necessary except in Oil Harbour, where the Port Authority deliver the cards.
CONSULS: The following countries are represented.
Argentina
Australia
Belgium
Brazil
Canada
Finland
France
Great Britain
Greece
India
Iceland
Israel
Italy
Japan
Liberia
Netherlands
Norway
Panama
Poland
Portugal
Romania
Spain
Sweden
Turkey
United States
U.S.S.R.
Venezuela
West Germany
REPAIRS: All types of repairs possible.
DRY DOCKS: Respective lengths, 787 ft. 5 in., 712 ft. 11 in. and 478 ft.
FLOATING DOCK: One of 7,000 tons capacity.
SLIPWAYS: 4 from 120 ft. to 280 ft. length.
REPATRIATION: Facilities exist for changing crew and arranging any necessary repatriation.
AIRPORT: 6 miles from centre. Direct lines for all parts of the world.
TIME: GMT plus 1 hour. No change.

HOLIDAYS: New Year's Day (January 1); Maundy Thursday; Good Friday; Easter Monday; Prayer Day; Ascension Day; Whit Monday; Christmas Day (December 25); Boxing Day (December 26).

Half holidays: Labour Day (May 1); Constitution Day (June 5); Christmas Eve (December 24).

Working hours: 0700-1630 with 2 half-hour meal breaks.

Saturday: All work performed at overtime rates.

Overtime work on Saturday and Sunday should be ordered by 1130 hrs. on Friday.

The working hours vary slightly from port to port as some start at 0730 hrs. and others at 0800 hrs., but a 42.5 hour week is common to all.

POLICE/AMBULANCE/FIRE: Call "000".

TELEPHONES: In many berths telephones can be placed on board ships.

GENERAL: Customs Authorities supervision of ship's provisions and bonded stores is carried out in the Free Port in the same way as in Customs Port. In this connection the Free Port is no Free Port.

SERVICES: All services available (tank cleaning, discharge of tank washings, compass adjusting etc.).

SHORE LEAVE: No restrictions.

AUTHORITY: Port of Copenhagen Authority.

ENSTED: 55.05 N. 09.25 E. (See Plan Book)

Also Refer to "Aabenraa"

DOCUMENTS: See "Kalundborg".

PILOTAGE: See "Aabenraa".

ANCHORAGES: See "Aabenraa".

HEALTH: In event of disease or fever on board, vessels Agent to be informed before arrival.

RADIO: Blaavand or Lyngby radio.

TUGS: Large vessels may require towage assistance on entering and leaving Ensted Harbour. A few days notice is required to call a Svitzer tug.

BERTHING:

Oil Terminal: Largest vessels which can be accommodated at the oil pier: (Berth No. 1).

Length overall	350 m.
Beam	no limits
Water depth	18 m.
Bow/centre	165 m.
Max. height water-level/manifold	26.5 m.

Coal Terminal: Largest vessels which can be accommodated at the deep sea coal berth:

Length overall	300 m.
Beam	no limits
Water depth	16 m.
Discharging facilities for coal: 2×20 ton unloading cranes.	
height from normal water level to lower edge grabs	22 m.
outlay of cranes from the quay side to centre grab	30 m.

STEVEDORES: To be informed by Agent.

MEDICAL: A few hours notice required to arrange for doctor to come on board. Hospital in Aabenraa.

TIDE: No tide – arriving and sailing day and night.

FRESH WATER: Fresh water from shore line 5 t.p.h.

FUEL: Not available.

OPENING/CLOSING HATCHES: By crew.

TELEPHONES: Available for placing on board.

AGENT: Aabenraa Shipping Agency ApS., Kilen 29, DK 6200 Aabenraa Telex 52160 – Telephone: International 4-62-77-00.

ESBJERG: 55.28 N. 08.26 E. (See Plan Book)

DOCUMENTS: Tonnage certificate, certificate of nationality, trade certificate, de-ratization certificate, and ship's manifest.

PILOTAGE: Advance notice of 3 hours prior to ETA "Graadyb Barre" is required; this may be done via Blaavand Radio. Alternatively, Port Authority's VHF may be used. Watch is kept on Channel 16. Telegraphic address is "Pilotstation Esbjerg". Pilot vessel is a 71 g.r.t., stationed in the Port of Esbjerg, it is furnished with VHF, Channel 16. Vessel carries signals prescribed. Pilot to be taken on board outside Graadyb Barre, at buoy "O". Vessels awaiting Pilot or high tide may anchor between buoys "1" and "Graadyb 0".

Pilotage is not compulsory except for tankers over 500 d.w.t. and when tugs are assisting in berthing.

ANCHORAGES: There are anchorage areas North West of buoy "Graadyb" (depth 35 ft. at MLWST).

RESTRICTIONS: Normally not sufficient ice to impede navigation. No ice dues charged. Also see "General" before first port.

MAX. SIZE: Length and breadth: no restrictions. Draft 30 ft. – 31 ft. Entry to port is through a dredged channel, width 200 m., depth 9.30 m. at MLWST.

RADIO: Blaavand Radio, call sign OXB.

TUGS: Tugs join vessel at Esbjerg Roads. Ship's own hawsers must always be used. 4 tugs available of 700, 1,500, 1,900 and 2,100 h.p.

BERTHING:

	Approach at MLWST.	Berth at MLWST
Trafikhavn	31 ft.	22 ft.–35 ft.
Foergehavn	28 ft.	22 ft.
Outer Foergehavn for Roll-on/Roll-off vessels	28 ft.	28 ft.
Dokhavn	22 ft.	22 ft.
Englandskaj	31 ft.	22 ft.
Osterhavn	31 ft.	22 ft.
Osterhavn – New Berth (when entering max. draft 30 ft.–31 ft. LOA 705 ft.)	31 ft.	35 ft.
Sonderhavn	31 ft.	22 ft.–31 ft.
Fishery Harbour – Consumption	15 ft.	15 ft.–17 ft.
Fishery Harbour – Industrial Fish	17 ft.	17 ft.–18 ft.

CARGO HANDLING: The port of Esbjerg has no specially equipped berths besides the tanker berths and container terminal for lift-on/lift-off, but private companies own suction plants for discharge/loading of feeding stuffs. Furthermore, mobile cranes also with grabs and stationary coal cranes are available. Container terminal for roll-oh/roll-off. Vessels with own gear can however be handled successfully, at different berths. 12 mobile cranes, capacity between 8 and 110 tons, 78 forklift trucks, capacity between 4 and 34 tons. There is also 1 stationary crane, capacity 35 tons.

STEVEDORES: Gangs are mustered daily at 0700, and 1000 hrs. ETA should be given to above hours to ensure that gang(s) are available on arrival. Working hours are from 0700 to 1630 and meal hours are 0830–0900 and 1200–1300. No work on Saturdays. Overtime can be arranged.

MEDICAL: Medical attention can be arranged at any time. Modern hospital facilities available.

TANKERS:

Trafikhaven: Depth in approaches to oilberths in Trafikhavn MLWST 31 ft. (MHWST 36 ft.)

Old Oilberth No. 101: Depth alongside old oilberth No. 101 MLWST 22 ft. (MHWST 27 ft.)

New Oilberth No. 102: Depth alongside new oilberth No. 102 MLWST 25 ft. (MHWST 30 ft.)

During time alongside these berths, vessels can touch bottom, which is soft and muddy. Largest vessel berthed had a LOA of 621 ft. A tanker with a LOA of 560 ft. has berthed at No. 101, and simultaneously another tanker with a LOA of 600 ft. has berthed at No. 102. The length between the outer point of No. 101 and the opposite outer point of No. 102 is 1,200 ft.

Osterhavn: Depth in approaches to oilberth in Osterhavn MLWST 31 ft. (MHWST 36 ft.). Max. length 564 ft., max. draft 30 ft. 6 in.

Powerstation Vestkraft No. 506: Depth alongside Powerstation Vestkraft No. 506 MLWST 35 ft. (MHWST 40 ft.).

Under normal weather conditions Pilot states to be able to berth tankers with a LOA of maximum 705 ft.

FRESH WATER: Can be delivered at all berths. Capacity 20 t.p.h.

FUEL: All viscosities available by road tanker. Marine Gas Oil also by tanker vessel. 4 hours should be given, always during office hours.

FIRE PRECAUTIONS: A fire watch is necessary when loading/discharging oil and petrol, if flash point is under 50.

GANGWAY/DECK WATCHMEN: Watchman is not essential, but advisable.

OPENING/CLOSING HATCHES: This can be done by members of ship's crew, or by stevedores at an additional charge of 8%.

IDENTIFICATION CARDS: Advisable.

CONSULS:

Belgium	tel. (05) 13 26 00
Finland	tel. (05) 12 40 00
France	tel. (05) 12 31 33
Iceland	tel. (05) 12 51 00
Netherlands	tel. (05) 12 13 11
Norway	tel. (05) 14 25 00 (after hours (05) 12 48 08)
Gt. Britain	tel. (05) 13 08 11
Sweden	tel. (05) 12 82 22
Germany	tel. (05) 12 75 44

CUSTOMS ALLOWANCES: Tobacco, 40 cigarettes per man/day. Wine and spirits, 0.25 litre per man/day.

REPAIRS: All types of deck and engine repairs can be effected.

DRY DOCKS: No dry docks, but slipways: Slipway No. 1 for trawlers, own weight max. 125 tons; Slipway No. 2 for vessels, own weight max. 160 tons; No. 3 – 500 tons; No. 4 – 750 tons.

REPATRIATION: Ample facilities for effecting crew changes and arranging repatriations.

AIRPORT: 8 km. from centre of town. Daily flights to Copenhagen.

TIME: Local time is GMT plus 1 hour. No alterations during the year.

HOLIDAYS: New Year's Day (Jan. 1); Maundy Thursday; Good Friday; Easter Day; Day after Easter Day; the 4th Friday after Easter; Ascension Day; Whit Sunday and Whit Monday; Christmas Day and Boxing Day. Permission to load/discharge on these days obtainable.

POLICE/AMBULANCE/FIRE: In case of emergency, dial "000" and ask for: Brand (fire), Politi (police), or Ambulance. Regular Tel. numbers are: Police 12 46 66; Ambulance and Fire Dept. (Falck/Zonen) 12 82 99.

TELEPHONES: Not possible to have telephones installed on board.

SERVICES: No tank-cleaning equipment available. For discharge of tank washings apply to Port Master's Office, Tel. 12 92 00. Compass adjusting can be effected.

SHORE LEAVE: Normally granted.
DEVELOPMENTS: Extension of the Harbour towards the East, and modernization of Trafikhavn and Sonderhavn.
AUTHORITY: Port of Esbjerg Authority.
AGENT: J. Lauritzen EFTF., Vestkraftkaj. P.O. Box 100, DK-6700 Esbjerg. Tel. (45-5) 123133. Telex 54133 and 54155. Cables "Lauritzen".

FREDERICIA: 55.35 N. 09.46 E. (See Plan Book)

DOCUMENTS:
1 copy Bill of Lading for all cargo (manifests are not required).
1 copy Manifests for Dangerous Cargo.
2 copies Crew List.
2 copies List of Dutiable Goods.
2 copies Stores Lists.

PILOTAGE: Three Pilots available for docking purposes and for through traffic to any place in Denmark or the Baltic. Pilots have a 24-hour watch and are located on the top floor of the KFK grain silo in the West Harbour. Can be contacted day or night over VHF radio Channel 16, working 12 and 13, or Tel. 05-920959. Pilotage is compulsory for tankers carrying chemicals or LPG and for all other tankers above 2,500 d.w.t.

Bigger ships usually take Pilot by Skaw L/V. Pilots to be ordered by ETA-telegrams to "Skawpilot Skagen", at least 12 hours in advance. Skawpilot listening on VHF Channel 16.

ANCHORAGE: To avoid hindrances to docking or undocking ships, ships of over or about 4,000 d.w.t. are requested to anchor off Trellenes. Smaller ships will find good anchoring conditions in Mollebugten.

RESTRICTIONS: Day and night entry possible, least depth in the approach channel is 15.0 m. Also see "General" before first port.

MAX. SIZE:

	Max. draft acceptable
Kastels Harbour	11.70 m.
Old Harbour	5.30 m.
Shipyard Harbour	2.80 m.
Dock Entrance	4.60 m.
West Harbour	8.70 m. to 6.70 m.
Moellebugt Harbour	9.70 m. to 8.70 m.

Also see "Tankers".

HEALTH: See "Copenhagen".
RADIO: VHF Channel 16.
TUGS: Tugboats from Switzer's Salvage Enterprise is stationed in Fredericia, but any amount of tugs are available, when ordered previously.

BERTHING:
Mollebugt Harbour: Quays Nos. 24 & 25 Length 250 m., depth 9–10 m.

Facilities for container traffic and Ro/Ro traffic. 40-ton gantry crane. 3 mobile cranes, capacity 6 to 25 tons. Railtracks. Facilities for temporary storage of goods. Modern quayside warehouses.

Gas, Oil & Chemicals Harbour: Quays Nos. 18, 19, 20, 22 & 23 for tankers. Quays Nos. 18 & 19, length 90 m., depth 7 m. in berth. Equipped for loading and discharging gas tankers.

Quay No. 20 – Jetty I. 15 m. depth in berth. Hydraulically operated hose handling gear for discharging petrol and oil products. 10 in. and 12 in. ASA. Connection range between + 0.4 and 18.5 m. above MWL.

Quay No. 22 – Jetty II. 11 m. depth in berth. Equipped for discharging petrol and gas products and bitumen. 6 in. and 8 in. hoses and 6 in. marine hose handling gear.

Quay No. 23 – Jetty III. 7.5 m. depth in berth. Equipped for discharging liquid chemical products. 4 in. DIN hoses.

West Harbour: Quays Nos. 13 to 17. Length 670 m., depth 7–9 m. in berth.

Cranes with grab and hook. 2.5 to 25 ton suction plant* available for discharging feedstuffs – max. capacity: 80 t.p.h. Railtracks. Facilities for temporary storage of goods.
Modern quayside freezing and storage facilities.

Shipyard Harbour: Quays Nos. 8 to 12. Length 500 m., depth 5.0–6.5 m. in berth. Modern repair and equipment piers with workshops. Slipways available for 75-ton and 1,000-ton light displacement. Floating dock 64 m. × 12.5 m. max. capacity: 700-ton light displacement. Dry dock facilities 108 m. × 22 m., 5.1 m. access depth. Average docking/sailing time: 45 mins.

Old Harbour: Quays Nos. 6 & 7. Length 200 m., depth 5.6–7.5 m. in berth. Mobile cranes, capacity: 6 to 25 tons. Suction plant* available for discharging grain – max. capacity 60 t.p.h. Facilities for discharging liquid chemical products. Railtracks. Facilities for temporary storage of goods.

Kastels Harbour: Quays Nos. 1 & 2. Length 450 m., depth 12 m. in berth. Mobile cranes, capacity: 6 to 25 tons. Discharging facilities for bulk fertiliser* – max. capacity: 250 t.p.h. Grab crane* – max. capacity: 300 t.p.h. Siwertell worm conveyor – max. capacity: 400 t.p.h. Railtracks. Facilities for temporary storage of goods. Preference for vessels destined for the Superfos Company.

* Private.

CARGO HANDLING FACILITIES: The Port possesses all types of modern facilities for loading and discharging. Crane facilities include a 40-ton gantry crane, a grab crane with a max. capacity of 300 t.p.h. and a number of grab and hook cranes and mobile cranes with capacities ranging from 2.5 to 25 tons. There are ample facilities for container and Ro/Ro traffic. The suction plant* is capable of handling up to 80 t.p.h. and the Siwertell worm conveyor equipment* has a max. capacity of 400 t.p.h. In addition, there are modern facilities for handling liquid chemicals, gas, petrol and oil products and bitumen. There are also facilities for handling fertiliser* – max. 250 t.p.h. The Port has a rail network freeze/cold stores*, approximately 6,000 sq.m. modern warehouse space and ample facilities for temporary quayside storage.

* Private.

STEVEDORES: Ordinary working hours Monday to Friday: 0700-0830, 0900-1200, 1230–1600 hrs. Night gangs on week days must be ordered no later than 1230 hrs. the same day. Working overtime weekends is possible, but gangs must be ordered no later than Friday 1230 hrs. Average output per 8-hour day, loading or unloading general cargo, is 200 tons per gang.

MEDICAL: Hospitals available.

TANKERS:

	Berth 18 (liquid gas)	*Berth 20*	*Berth 22*	*Berth 23 (Chemicals)*
Max length acceptable	app. 90 m.	app. 275 m.	app. 230 m.	app. 150 m.
Max. beam acceptable	no limit	no limit	no limit	no limit
Max. draft acceptable	6.40 m.	13.00 m.	10.70 m.	7.20 m.
Depth in berth	6.70 m.	15.00 m.	11.00 m.	7.50 m.
Density of water	app. 1.015	1.015	1.015	1.015
Type of berth	Quay	T-Head	T-Head	T-Head
Nature of bottom	Sand	Sand	Sand	Sand
Hose connections	Amidsh.	Amidsh.	Amidsh.	Amidsh.

A/S Dansk Shell (Shell Refinery):

	Jetty I	*Jetty II*
Max. length acceptable	app. 190 m.	app. 274 m.
Max. beam acceptable	No limit	No limit
Max. draft acceptable	10.00 m.	13.25 m.
Depth in berth	10.30 m.	15.00 m.
Density of water	app. 1.015	app. 1.015
Type of berth	T-head	T-head
Nature of bottom	Sand	Sand
Hose connections	Amidship	Amidship

Jetty I – Chicksan arms – for vessels discharging bitumen and other special products, and for loading fuel-oil, gas-oil, gasoline, diesel fuel, and LPG.

Jetty II – Curacao hosehandling gear – for vessels discharging crude, fuel-oil-handling subject to size of vessel.

Pilotage: Pilotage is compulsory for tankers carrying chemicals or LPG, and for all other tankers above 2,500 d.w.t.
Dirty Ballast Reception: Oily ballast reception facilities available – maximum quantity 5,500 cu.m.
Restrictions: Height from normal water level to hose connections must not exceed 15.90 m. during discharging and ballasting.
Communication: The port is equipped with VHF station – Channels 16, 12 and 14.

FUEL: Available.
FRESH WATER: Available ex wharf. Rate 10–50 t.p.h.
DEVELOPMENTS: Plans to build an ocean berth in the Mollebugten just West of pier 22. The ocean berth will be 350 m. long and have a depth of 12 m. Part of the New Harbour is ready – See Plan.
GANGWAY/DECK WATCHMEN: Available upon request.
OPENING/CLOSING HATCHES: Stevedores or crew.
CERTIFICATES:
Ship's Register.
Load Line Certificate.
Radio Safety Certificate.
International Safety Certificate.
Deratification Certificate.
CUSTOMS ALLOWANCES: See "Copenhagen".
IDENTIFICATION CARDS: Required.
CONSULS: Finland, France, Holland, Iceland, Norway, and Sweden.
REPAIRS: All repairs undertaken with modern equipment.
DRY DOCKS: Length 354 ft., breadth 72 ft. Max. depth at Dock gate 16 ft. 06 in. Slipway available for ships up to 1,000 tons, light displacement (divers available).
AIRPORT: At Billund and Beldringe 35 miles from Fredericia.
REPATRIATION: All facilities exist.
TIME: GMT plus 1 hour. No change.
HOLIDAYS: See "Copenhagen".
POLICE/FIRE/AMBULANCE: Police 921577; Ambulance 924000; Fire 921573; Emergency 000.
TELEPHONES: Both oil piers have telephones in the watchmen's room but for local calls only.
SHORE LEAVE: Allowed.
AUTHORITY: Harbour Master.

FREDERIKSHAVN: 57.28 N. 10.33 E. (See Plan Book)

DOCUMENTS: Ship's papers, 2 Crew Lists, 1 Passenger List, 2 Bills of Lading, 1 Manifest, 1 Customs declaration of tobacco and spirits for Officers and crew, 1 Customs declaration (TOLDPAS) if arrived from port in EEC or Scandinavia.

PILOTAGE: Call the Pilot either over the coast radio station "Skagen Radio", call sign "OXP", telephone 426532 or direct by VHF Channel 16. Pilot outside the harbour boards at the buoy 1.7 miles S.E. of the harbour entrance. The pilot boat is a little red painted motorboat. ETA required as soon as possible, minimum 3 hours.

ANCHORAGE: In the roads South of the red leading lights in 10 m. water depth. Good holding ground. At the entrance to the fishing harbour between the pierheads for a width of 50 m. on each side of the heads, anchoring is prohibited (submarine cable).

RESTRICTIONS: Vessels coming from or entering the naval base and the fishing harbour must wait for ships entering or leaving the commercial harbour. Maximum speed Frederikshavn L/B – to harbour 12 knots, in outer basin – 7 knots, Harbour – 3 knots. Entering the Naval Base without special permission prohibited. Ships entering the harbour must if necessary wait outside for ships leaving the harbour. Also see "General" before first port.
MAX. SIZE: Max. length about 200 m., draft 8 m. at high water. At oil quay max. draft 8 m. at high water. Tide about 0.3 m.
HEALTH: Use international quarantine signals. If suspected disease or fever on board wire the Agent to arrange everything to obtain pratique as soon as possible.
RADIO: Nearest coast radio station "Skagen Radio", call sign "OXP". The harbour office is fitted with VHF Channels 16, 12 and 13. Watch kept day and night.
TUGS: Tugs join vessel outside the harbour between the buoy and the harbour entrance. Only the ship's line to be used.
BERTHING: No special requirement for berthing in the harbour, but several big ferries are running in and out during day and night and sailing after a time schedule. It is therefore recommended to call the harbour office, VHF Channel 16, for permission to enter.
BULK HANDLING FACILITIES: One grain berth, with 8 m. depth alongside, equipped with suction pipe capacity 60 t.p.h. approx.

Ferry berths in Harbour, depth 6.4 m. to 8 m., equipped for handling containers and roll-on/roll-off traffic.
TANKERS: Oil quay max. depth 8 m., Hoses 8 in. diameter. Reducing pieces may be necessary. Slop water discharging and cleaning can be done by oil-separator. Tankers draft max. 8 m. at high water.
DENSITY: 1,020 (approx.).
STEVEDORES: ETA advices are required before 0900 hrs. in order to arrange gangs for discharge/loading the same day.
MEDICAL: No special requirement is necessary for medical attention. The town has all ordinary medical and hospital facilities.
FRESH WATER: Supplied by water hydrants on all quays.
FUEL: All kinds of fuel are available and no advance notice is necessary.
FIRE PRECAUTIONS: No smoking and no open fire. If discharging oil, fire watchman from the Harbour Authority required. If discharging gas, dangerous chemicals and ammunitions, etc., beside the watchman, the Harbour Authority will require restricted access to vessel.
GANGWAY/DECK WATCHMEN: Not compulsory but available if required.
OPENING/CLOSING HATCHES: Ship's crew open and close the hatches. If necessary the longshoremen can do it for extra pay.
CUSTOMS ALLOWANCES: Only for ships coming from abroad – 0.25 litre wine and 0.25 litre spirits, 40 grams tobacco or 40 cigarettes per man per day and only 3 days ration in one time. On requirement after that, the Master can obtain a new allowance in proportion to the stay in harbour.
CONSULS:

Sweden	Tel. 08-422922	Germany	Tel. 08-420011
Norway	,, 08-420900	France	,, 08-422299
Finland	,, 08-421044		

REPAIRS: Three steel shipyards and one wood shipyard doing all kinds of repairs.
DRY DOCKS: Four dry docks, two floating dock and two small slips. Dimensions of largest dry dock: length 195 m., breadth 32.2 m. and depth 7 m. Largest floating dock: length 129 m., breadth 28 m., depth 3.7 m., capacity 7.500 tons.
REPATRIATION: Agent will arrange repatriation. All facilities for changing crew.
AIRPORT: Aalborg Airport, 60 km's. from port, several daily flights to Copenhagen.
TIME: Local time GMT plus 1 hour.
HOLIDAYS: Weekends, Easter, Whitsun, Christmas, New Year and two Danish holidays in the Spring.
POLICE/AMBULANCE/FIRE: Police, Tel. 08-421444; Ambulance, Tel. 08-422222; Fire, Tel. 08-421444. in emergency dial 000.
SERVICES: Separating of slop water, compass adjusting, oil bunkering, repairing all kinds of navigation instruments and provisions.
SHORE LEAVE: After clearing inwards, crew members are allowed ashore without special permission.
AUTHORITY: Harbour Council

GULFHAVN: 55.12 N. 11.16 E. (See Plan Book)

Tanker discharge terminal operated by Gulf Oil Refining A/S.
DOCUMENTS:

Ship's Register.
Load Line Certificate.
Safety Radio-telephone Certificate.
Derating Certificate or Exemption Certificate.
Exact list of tobacco, cigarettes and spirits showing the vessel's and the crew's supply on arrival.
Bill of Lading (if vessel is carrying cargo).

Copy of the crew list is required by Gulf Oil Refining A/S.
PILOTAGE: 2 Pilots and pilot vessel available. Pilot acts as Berthing Master; may be requested to board arriving vessels at either: Halsskov Lightship position 55° 20.1′ N. 11° 02.5′ E. or 2 nautical miles South of Halskov Lightvessel or any place in proximity of Gulfhavn.

Pilot vessel equipped with VHF following Channels: 6, 10, 12, 16 of which Channel No. 6 used for ship-to-ship communication. Pilot station at Agerso also equipped with VHF radio with following Channels: 12, 13 and 16. Pilot can be contacted at the station on Channel 16.

A vessel's ETA should be communicated by Master to Agent, 72, 48 and 24 hours prior to arrival. Agent will keep Refinery advised and make necessary arrangement with Pilot.

Bigger ships usually take Pilot by Skaw L/V. Pilots to be ordered by ETA-telegrams to "Skawpilot Skagen", at least 12 hours in advance. Skawpilot listening on VHF Channel 16.
ANCHORAGES:
Korsor: Roads: depth 20 m. (65.6 ft.). Bottom sand, good holding ground. Width of area about 2 square nautical miles.
Gulfhavn Roads: depth 30 m. (98.4 ft.). Bottom clay. Good holding ground. Width 0.5 nautical mile. Length 1.5 nautical miles.

Power cables running between Zealand and Agerso Island (marked on charts) must be avoided.
RESTRICTIONS: See "General" before first port.
MAX. SIZE: Max. draft at normal tide is 15 m.; safe draft is considered to be 14.3 m.
VHF: Call sign "Gulfhavn" Channels 12, 14 and 16, on 16, 24 hours a day.
TUGS: None available locally. If required 24 hours notice must be given. Pilot will advise if weather conditions demand use of tugs (in good time).
BERTHING: Oil pier is a T-shaped structure on which 4 berths provide – 1 berth for 100,000 d.w.t. tankers, 1 for 20,000 d.w.t. tankers, 1 for 5,000 d.w.t. tankers and 1 for smaller vessels up to 500 d.w.t.

Depths alongside:		
	Berth 1	15.0 m. (49.2 ft.)
	Berth 2	12.0 m. (39.4 ft.)
	Berth 3	7.5 m. (24,6 ft.)
	Berth 4	4.5 m. (14.8 ft.)

Adequate lifting facilities to assist in hose connecting and handling of necessary hose equipment should be ready on arrival. Refinery representative will board on arrival and discuss discharging/loading operation.

Berth No. 1

Berth 1 is equipped with mechanically operated Woodfield hose-handling structure. The booms are 12.2 m. (40 ft.) long. Berth No. 1 is primarily equipped for handling incoming crude, but can be used for other purposes (gasoils, intermediate and heavy fuels) when not being occupied by crude vessels.

The booms are arranged in the following sequence of product handling:

Boom No.	*Size of booms and contents*
1	10 in. Ballast water
2	12 in. Crude oil
3	12 in. Crude oil
4	12 in. Crude oil
5	8 in. Intermediate and heavy fuel (all grades)

The sequence is from South to North or from right to left as you face the shore.

The distance from Danish Mean Sea Level to the highest position of centre line of manifold is 17.0 m. (55.8 ft.).

In addition to the oil products handled on Berth No. 1 there are the following other connections on the pier:

Size of connection	*Contents*
6 in.	Ballast water
6 in.	Gas oil
6 in.	Intermediate and heavy fuel (all grades)
4 in.	Tetra methyl lead

Berth No. 2

Berth No. 2 is equipped with mechanically operated hose-handling structure (Woodfield). The booms are 9.1 m. (30 ft.) long.

The booms are arranged in the following sequence of product handling:

Boom No.	*Size of booms and contents*
1	10 in. Ballast water and crude oil
2	10 in. Intermediate and heavy fuel (all grades)
3	12 in. Intermediate and heavy fuel (all grades)
4	10 in. Diesel fuel
5	10 in. Diesel fuel
6	10 in. Gasoline
7	10 in. Gasoline

The sequence is similar to pier No. 1, i.e., South to North.

The distance from Danish Mean Sea Level to the highest position of centre line of manifold is 15 m. (49.2 ft.).

In addition to the oil products handled on Berth No. 2, there are the following other connections on the pier:

Size of connection	*Contents*
6 in.	Intermediate and heavy fuel (all grades)
6 in.	Gas oil
6 in.	Ballast water
6 in.	Stoddard solvent
6 in.	Naphtha
6 in.	Kerosene
6 in.	Gasoline

In addition to the oil products handled on Berth No. 2, Berth No. 3 and 4 can also handle L.P.G. (liquid petroleum gas) and Berth No. 4 solid sulphur product. All connections on Berth No. 3 and 4 are 6 in. Berth No. 3 also handles Bitumen (Asphalt).
MEDICAL: Hospital at Skelskor; Tel. Skelskor (03) 59 44 50.
DENSITY: Ranges between 1023 and 1007, dependent on season and weather conditions.
FRESH WATER: Available at all 4 berths. Limited to 160 tons. Supplied with a pumping rate of 45 t.p.h.

FUEL: Bunker fuel available at all 4 berths. 24 hours notice required.

FIRE PRECAUTIONS: The harbour is not equipped with fire-fighting vessel. Fire-fighting equipment is stationed on quay.

GANGWAY/DECK WATCHMEN: Available if required.

IDENTIFICATION CARDS: Required by crew.

CONSULS:

Finnish Consulate: (Mr. Axel Le Dous) Algade 14, Korsor, Tel. (03) 57 03 20.

Norwegian Consulate: (Mr. J. U. Jepsen) Jens Baggesensgade 35, Korsor, Tel. (03) 57 00 06.

Swedish Consulate: (Mr. Bjarne Fischer) Brogade 2, Korsor, Tel. (03) 57 00 02.

German Consulate: (Mr. Finn Poulsen) Batterivej 7, Korsor, Tel. (03) 57 05 86.

All other consulates are situated in the Copenhagen area.

REPAIRS: Small deck and engine repairs can be carried out.

REPATRIATION: Facilities exist via Agent.

AIRPORT: Copenhagen 120 km. away.

TIME: GMT plus 1 hour.

POLICE/AMBULANCE/FIRE: Police Skelskor (03) 59 61 00; Ambulance Skelskor (03) 59 47 07; Fire Refinery 00.

TELEPHONES: A public telephone box situated at entrance of pier outside cooling-water pumphouse. In addition temporary phones will be provided upon request at Berths 1 & 2. Billing will be handled directly by Agent.

SHORE-LEAVE: Allowed, but personnel not allowed to walk in refinery area. Transport will be arranged from ship to refinery entrance upon request.

AUTHORITY: Stigsnaes Toldkontrol.

HADERSLEV: 55.15 N. 09.29 E.

DOCUMENTS: See "Copenhagen".

PILOTAGE: Aarosund Pilot station.

ANCHORAGES: Aarosund.

RESTRICTIONS: Impossible to enter Haderslev by night since there are no lights in the fjord. Also see "General" before first port.

MAX. SIZE: Length 110 m.; width 17 m.; depth 4.9 m.

HEALTH: See "Copenhagen".

RADIO: Lyngby Radio.

TUGS: None available.

MEDICAL: Advance notice required if hospital facilities are required.

FRESH WATER: Fresh water from quay.

FUEL: None available.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Carried out by the crew.

CUSTOMS ALLOWANCES: Tobacco (100 cigarettes per man per 3 days); wine/spirits (1 bottle per man per 3 days).

IDENTIFICATION CARDS: Not needed.

CONSULS: Swedish, French, Belgian.

REPAIRS: Small repairs available.

REPATRIATION: No facilities.

AIRPORT: 15 km. from Haderslev.

TIME: GMT plus 1 hour.

HOLIDAYS: Discharging can be arranged on holidays.

POLICE/AMBULANCE/FIRE: Police, 045 2 2525; Ambulance, 000; Fire, 000.

TELEPHONES: No facilities.

SHORE LEAVE: Allowed.

AUTHORITY: Harbour Master.

HELSINGOR (Elsinore): 56.02 N. 12.37 E. (See Plan Book)

DOCUMENTS:

1 Cargo Manifest.
2 Crew and Passenger Lists.
2 Tobacco Lists.
2 Stores Lists.
Measurement Certificate or Registry Certificate.

PILOTAGE: Call Pilot by hoisting Pilot Flag "G", or Morse signal "PT". Cable Address: "Helsingorpilot". Alternatively contact by VHF.

VHF Channel 16, Frequency 156,80 mHz (receiving frequency)
VHF Channel 13, Frequency 156,65
VHF Channel 12, Frequency 156,60

One hour's notice required before arrival at port. Pilot cutter, green hull, yellow superstructure, "Pilot" painted on superstructure. Boarding North of, South of and East of the port of Helsingor. Waiting area 0.5 mile South of the port of Helsingor. Helsingor Pilots are also sea Pilots for Kattegat, the Belts, The Orestraights and the Baltic.

ANCHORAGE: South of the port, in the roads of Helsingor, depths from 19 to 25 m. with sand or loose clay bottom.

RESTRICTIONS: Following signals are given from the lighthouse situated on the head of the Southern pier: prohibition to sail is signalled by red rapid flashes in the harbour direction and green flashes out towards the approaches. Entering and sailing prohibition is signalled by red rapid flashes both sides. "Vessels moving in the harbour" is signalled by yellow flashes out towards the approaches, yellow in towards the harbour. Ship departing waits for ship entering. When a vessel gives signal to enter (1 long whistle or blast) it is regarded as an entering vessel.

MAX. SIZE: Up to 26 ft. draft. Also see "General" before first port.

RADIO: Harbour Office of Helsingor call VHF Channel 16, shift to Channels 12 or 13 for working.

TUGS: Tugs come from Copenhagen at 2–3 hours notice.

BERTHING: Vessels berthed in order of arrival.

MEDICAL: Hospital and medical facilities available.

FUEL: Not available.

FRESH WATER: Approx. 30 tons of fresh water per hour delivered through 15 in. hoses at the berths.

WATCHMEN: Not required.

CUSTOMS ALLOWANCES: For use on board during call reasonable stores and other requirements will be approved by the customs. Following quantities allowed per man per 24 hours, not exceeding 3 days: 40 cigarettes or 10 cigars or 20 cigarillos or 40 grams other tobacco products, 0.25 litre wine and 0.25 litre spirits.

IDENTIFICATION CARDS: Crew need passports.

REPAIRS: Helsingor Skibsvaerft og Maskinbyggeri A/S are qualified to undertake all forms of repair work.

DRY DOCKS: Dock No. 1: 155 m. long, 20.5 m. wide, 6.6 m. depth. Dock No. 2: 116 m. long, 16.3 m. wide, 4.7 m. depth.

AIRPORT: 1 hour by car from Copenhagen International Airport.

TIME: GMT plus 1 hour.

HOLIDAYS: Work can be performed all the year round.

POLICE/FIRE/AMBULANCE: Police Tel. 03.21.14.48; Ambulance/Fire Tel. 03.22.31.31.

TELEPHONES: Telephones are only available on board in particular circumstances.

SHORE LEAVE: Crew are free to go ashore.

AUTHORITY: Harbour Master.

HORSENS: 55.52 N. 09.52 E. (See Plan Book)

DOCUMENTS:

Crew List (East European countries only).
List of Tobacco.
Manifest (for Agents and Stevedores).
Bills of Lading (for Agent's use).

Ship's papers:

International Load Line Certificate.
Certificate of Register (international letter of measurement).
Derating Certificate.
Radio Safety Certificate.

PILOTAGE: Pilot station is situated at Juelsminde.

VHF Channels 6, 12 and 16.

Advance notice of 2 hours required.

Normally pilot boat will be located South of Lillegrund – 55.43° N. 10.08° E.

ANCHORAGE: No special anchorages at the firth; vessels may anchor where safe navigation permits – attention is called to cable area at Hjarno Sound.

RESTRICTIONS: See "General" before first port.

MAX. SIZE: Max. length, approx. 500 ft.; max. breadth, approx. 70 ft.; max. draft, approx. 22 ft. A dredged channel 32 m. wide and 6.9 m. deep leads to the harbour.

HEALTH: Kindly inform Agent or Port Authorities in advance in event of any suspected disease or fever on board. Normally no necessary procedure to obtain pratique. Pratique is automatic after calling at another Danish port.

RADIO: VHF at Harbour office, Channels 9, 12, 13 and 16.

TUGS: Tug "Vitus" stationed in the harbour.

STEVEDORES: For working Monday morning ETA must be given Friday during office hours. Otherwise ETA must be given the day before work to commence. One suction apparatus for discharging grain. Normally the cargo is handled by shore cranes. There are 2 coal cranes and 5 piece-goods cranes available.

MEDICAL: No advance notice required. Hospital facilities available.

TANKERS: Discharge lines diameter: 6 in. and 8 in. Four berths for tankers, 1 at Esso with 5.6 m. of water alongside, 1 at DAK with 6.9 m. of water, 1 at KH with 6.9 m. of water and 1 at Nynas Johnson.

FRESH WATER: Delivered alongside from shore connections.

FUEL: All types of light fuel available.

GANGWAY/DECK WATCHMEN: No service of watchmen necessary.

OPENING/CLOSING HATCHES: Normally carried out by crew, but can be done by stevedores.

CUSTOMS ALLOWANCE: Tobacco: 30 cigarettes per man per day – or 100 cigarettes permitted to be held out of bond. Wine and or Spirit: One bottle of each to be held out of bond.

IDENTIFICATION CARDS: Not needed.

CONSULS: Finland, 05-623433; Norway, 05-624666; Sweden, 05-624411; France, 05-623288.

REPAIRS: No shipyard – only small repairs can be carried out.

REPATRIATION: No special facilities for effecting crew changes exist.

AIRPORT: Distance from airport about 50 km., with regular airlines.

TIME: GMT plus 1 hour.

POLICE/AMBULANCE/FIRE: Dial 0-0-0. Fire alarms placed around the port.

TELEPHONES: Not available on board vessels.

SHORE LEAVE: Allowed.

DELAYS: No delays can normally be expected. Larger ships with big draft may expect delay during nights with poor visibility. They have to wait for daylight in order to enter port through dredged channel.

AUTHORITY: Harbour Master.

AGENT: Wilh. Chr. Bech Rederi-& Skibsmaeglerforretning. Proprietor: O. H. Rasmussen, Jens Hjernoesvej 22, dk-8700 Horsens. Phone: 5–62 65 66. After office hours: 5–61 19 65 – 61 08 10 – 62 29 56. Telegrams: "Brokerbech". Telex: 61616.

KALUNDBORG: 55.41 N. 11.06 E. (See Plan Book)

OPERATORS: Dansk Esso A/S.

DOCUMENTS: Ship's Register

Load Line Certificate.
Safety Radio Certificate.
Safety Equipment Certificate.
Safety Construction Certificate.
Derating Certificate or exemption.
Bill of Lading (if cargo).
Crew List.

Customs need a Tobacco and Spirit List, showing the vessel's and the crew's supply by arrival.

PILOTAGE: Not compulsory. Pilot station situated at Kalundborg, telegram: Kalundborg Pilot, tel. Kalundborg 03.51.08.89. Green plastic vessel carrying int. signal flag or lights for Pilot. Contact by VHF Channels 16, 12 and 6. Pilot is taken on board at the entrance of Kalundborg Fjord.

Bigger ships usually take Pilot by Skaw L/V. Pilots to be ordered by ETA-telegrams to "Skawpilot Skagen", at least 12 hours in advance, Skawpilot listening on VHF Channel 16.

ANCHORAGE: Large vessels anchor in 42 ft. of water outside between Rosnaes and Asnaes; S.W. to N.W. winds cause swell but holding ground is good. Small vessels anchor between Gisselore Point and Harbour. From where channel leads to harbour.

Tankers: The anchorage is approximately 4–5 miles W.N.W. of the oil pier. Particulars regarding the anchorage will be given by the Pilot.

RESTRICTIONS: Depth in channel and at entrance 39 ft. 4 in., entrance width 131 ft. Also see "General" before first port and "Tankers".

MAX SIZE: 900 ft. length. 38 ft. draft.

RADIO: *Arrival Message:* The Masters of crude or deep-sea vessels are requested to advise the refinery through their Agents of their ETA 72 hours in advance, and again 24 hours before ETA. For other vessels operating in Scandinavian waters, a 24 hours ETA notice will be required. For coastal traffic in Danish waters, ETA is required when departing for Kalundborg. If there should be any significant change in the ETA over 2 hours, additional advice is required.

HEALTH: Pratique granted by Customs Officers who bring Health Declaration for Masters to complete. In event of suspected disease or fever on board radio details to Agent before arrival. When vessel arrives from port outside of Europe and U.S.A. and has been less than 14 days at sea, all crew members require valid smallpox vaccination certificates.

TUGS: Available, normally join vessel off harbour, often using vessel's lines. If tug's lines are used, an extra charge will be made.

Tankers: The required number of tugs will be ordered through the Agent in accordance with the agreement between the Pilot and the Pier Captain.

For vessels between 16,500 d.w.t. and 70,000 d.w.t. the following tug assistance will normally be required: One 1,700 h.p. tug forward on starboard side and 2 tugs of 1,800 h.p. and 400 h.p. aft.

For vessels over 70,000 d.w.t. an additional tug of minimum 1,000 h.p. will normally be required.

For all traffic to and from Pier C, tug assistance must be used in all cases where a vessel of 10,000 d.w.t. and over is already moored at Pier B.

Also see "Tankers" Pier Traffic Restrictions.

BERTHING:

East Harbour: Depth is 23 ft. Equipment: 1 crane for coal-discharge and 1 crane for grain-discharge.

Fertiliser-quay: Depth is 26 ft. 6 in. Equipment: 1 crane for phosphate-discharge.

West Harbour: Depth is 22 ft. 6 in. Equipment: 1 suction-apparatus.

South Harbour: Length 240 m., depth 10 m. (32.6 ft.). One crane capacity 12–25 tons. Roll-on/Roll-off facilities. Max. draft 30 ft.

2 mobile cranes available in all harbours.

TANKERS:

Pier A: For deep-sea vessels. Max. draft 41 ft. up to 70,000 d.w.t. For larger vessels between 70,000 and 100,000 d.w.t. the max. draft is 40 ft.

Crude discharge is via 2×12 in. hoses to the 30 in. crude pipe-line to the refinery, approximately 2 km. in length.

Bunker/Heavy Fuel deliveries through 14 in. line and 12 in. hose to the vessel. There are 10 other products, all in 10 in. lines and 10 in. hoses connected to the vessel.

The products are:

Naphtha/LVN.
Regular/Premium Gasoline.
Kerosene.
Auto Diesel.
Heating Oil.
Marine Diesel.
Fuel Oils: LFO, LSHFO, LPHFO.

Ballast is discharged through 1 by 10 in. and 1 by 12 in. hose into a 14 in. pipe-line.

Pier B: For vessels up to 16,000 d.w.t. (under special circumstances vessels up to 25,000 d.w.t. can be accepted). Max. draft 33 ft. Bunker/Heavy Fuel deliveries through 14 in. and 12 in. hose to the vessel. There are 10 other products all in 10 in. lines and hoses connected to the vessel. The products are:

Naphtha/LVN.
Regular/Premium Gasoline.
Kerosene.
Auto Diesel.
Heating Oil.
Marine Diesel.
Fuel Oils: LFO, LSHFO, LPHFO.
LPG is available through a 4 in. line.

Ballast is discharged through 1×10 in. and 1×12 in. hose into 14 in. pipe-line.

Pier C: For vessels up to 3,000 d.w.t. Max. draft 15 ft. 4 in. Products are:

Regular/Premium Gasoline.
Naphtha (discharging).
Kerosene.
Auto Diesel/Heating Oil.
Marine Diesel.
Fuel: HFO, LFO, LSHFO.

Loading is through 6 in. hose over the vessel's rail, although LPG is loaded via 4 in. line and 3×2 in. hoses, and asphalt over 6 in. steel arm.

Ballast can be discharged into a 6 in. line.

Pier D: For vessels up to 1,300 d.w.t. Max. draft 15 ft. 4 in. Loading through 6 in. hose over vessel's rail.

Products are:
Varnolene.
Solvents.
Regular/Premium Gasoline.
Naphtha/LVN (loading and discharging).
Kerosene.
Marine Diesel.
Auto Diesel/Heating Oil.
Fuel: HFO-LSHFO.

Ballast can be discharged into a 6 in. line.

The above maximum drafts for Pier A, B, C and D are based on normal water level in the Fjord.

Pier Traffic Restrictions: Restrictions for movements of vessels under varying weather conditions:

All Piers will be closed for in and outgoing traffic if the wind force is over 23 m/sec. (9 Bs).

Pier A & B, if the wind direction is between S.W. and N.N.W. and the wind force is between 15 m/sec. (7 Bs) and 23 m/sec. (9 Bs) tug must be used.

Pier C, If the wind direction is between S.W. and N.E. and the wind force is between 15 m/sec. (7 Bs), and 23 m/sec. (9 Bs) tug must be used.

Pier D, If the wind direction is between S.W. and N. and the wind force is over 15 m/sec. (7 Bs), the pier will be closed for all traffic.

Woodfield Loading Arms: If the wind force is over 23 m/sec. (9 Bs), all discharging/loading via loading arms will be stopped. Valves on shore line and vessel closed, and the system drained free of oil. It is the pier foreman's duty to enforce the above wind restrictions. His decisions will be based on actual measurements of the meteorological conditions.

Discharging and Loading Rates: Crude discharge rate is 38,000 Bbls. or about 5,000 t.p.h. Maximum inline pressure is 105 p.s.i.g. except for LPG where the maximum pressure is 250 p.s.i.g.

Approach Speed and Engine Check: Vessels approaching the Pier for berthing without tug assistance must slow down to an absolute minimum speed before passing the outer dolphin. Before reaching this point, a test of a true and realistic reverse manoeuvre must have been carried out to make sure that the system is functioning correctly.

Traffic Passing the Pier: There is a brisk ferry boat traffic in the outer harbour. Approximately 40 times a day a ferry passes the outer pier head in a distance of 100–300 m.

Dry cargo vessels up to about 10,000 d.w.t. call at the Kalundborg harbour and will be passing the outer Pier at a distance of approximately 500 m. from the pier head. The vessels pass at slow speed.

Tank/dry cargo vessels call at the nearby Power Plant which is equipped to handle vessels of 70,000 and 20,000 d.w.t., respectively.

Wind Conditions: The prevailing wind is from West, but most of the heavy winds and storms come from N.W.

Wind velocities exceeding 15 m/sec. (7 Bs) occur on the average about 20 days a year from S.W., about 15 days from West, 40 days from N.W. and 25 days from North.

Tide and Current: The difference between the average high-tide and average low-tide is approximately 0.3 m.

A storm from N.W. can give a high-tide of approximately 1.3 m. over normal daily average, whereas a storm from S.E. can result in a tide 0.9 m. below daily normal average.

There is practically no current at the Pier.

Wave Height at the Pier: The highest waves at the Pier will occur when the wind is from W.N.W.

The theoretical average wave height exceeds 0.7 m. for approximately 35 days a year, and an average wave height of 1 m. will be exceeded about 6 days a year.

Signal Flag: Vessels must, when loading/discharging, carry signal flag "B" during the day from sunrise to sunset, and a red light during the night.

Sanitary Regulations: The Standard regulations for Danish Harbours governing sanitation also apply to Kalundborg Oil Pier.

Trash and galley refuse must not be thrown overboard. Special containers for refuse are placed on the Pier.

Precautions must be taken to prevent discharge from toilet, bath room, etc. onto the Pier.

Gangway: Vessel to provide a safe gangway.

Laundry: Requirements should be given to the Agent's representative immediately on arrival. Laundry to be ready for delivery on arrival. A complete list is required.

Visitors: Only persons on business are allowed on the Pier. Visitors, as guests of the Master, are allowed to board vessels provided there is a request from the Master to the pier office. Further details for obtaining permits for visitors can be obtained from the pier office.

Telephone: For short distance calls a coin telephone is provided in the Pier Office building; for long distance calls arrangement must be made through the vessel's Agent.

STEVEDORES: Available, ordered by Agent, no ETA to stevedores necessary.

BALLAST: All ballast is to be discharged into the shore ballast tank. This tank is a 30,000 Bbls. tank, and usually there is approximately 20,000 Bbls. room available.

Disposal of ballast overboard is prohibited. Engine room or pump room bilges must not be pumped overboard when in Danish waters.

Sea valves will be sealed on vessel's arrival and must not be broken without approval by the pier captain or his substitute. Ballast for entering the harbour should be carried in a minimum number of tanks, and all other tanks stripped so as to minimize the time required for ballast discharge when alongside the Pier.

MEDICAL: Hospital and doctors available.

DENSITY: 1,011.

FRESH WATER: Available, supplied from shore by hose, about 15 t.p.h. 25 t.p.h. in Oil Harbour.

FUEL: All grades available, 24 hours ETA required by truck or barge.

FIRE PRECAUTIONS: No smoking allowed.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Carried out by crew.

CUSTOMS ALLOWANCE: Each Crew member allowed 100 cigarettes or 20 cigars or 100 grams tobacco and 1 bottle spirits.

IDENTIFICATION CARDS: Not required.

CONSULS: Swedish, Norwegian; others at Copenhagen.

REPAIRS: All types of repairs available.

REPATRIATION: All facilities exist.

AIRPORT: Nearest at Copenhagen about 80 miles from Kalundborg. Served by regular airlines.

TIME: GMT plus 1 hour. No alterations through the year.

HOLIDAYS: New Year's Day; Easter Thursday; Good Friday; Easter Monday; Ascension Day; 1st May; Whit Monday; Prayer Day; 5th June; Christmas Day; 2nd Christmas Day. No work can be carried out.

SHORE LEAVE: Allowed.

DELAYS: Due to ice between 15th December and 31st March.

KOGE: 55.27 N. 12.12 E. (See Plan Book)

DOCUMENTS: For Customs vessels require:

Vessels of 150 ton and upwards, Load Line Cert.

Vessels of 300 ton and upwards, Load Line Cert. Radio Security Cert.

Vessels of 500 ton and upwards, Load Line Cert. Radio Security Cert. Equipment Security Cert.

For all passenger vessels also Security Cert.

For stevedores vessel shall have Bills of Lading, Manifests and Loading plans.

PILOTAGE: Vessel to call Pilot 2 hours before arrival. VHF on pilot station and pilot boat. Watch on Channel 16. Normal international light and sound signals used. Pilot boat located about 2 nautical miles East of port. No difference in bad weather.

ANCHORAGES: 1–2 nautical miles East of port with good bottom conditions.

RESTRICTIONS: See "General" before first port.

MAX. SIZE: Max. permissible length, 150 m.; max. permissible draft, 7 m.

HEALTH: Normal quarantine rules.

RADIO: Lyngby Radio or any other radio station in Denmark.

TUGS: No tugs in port. Can be obtained from Copenhagen.

STEVEDORES: Normal ETA and description of vessel required.

MEDICAL: Doctor and hospital assistance available; other facilities to be obtained from Copenhagen.

TANKERS: Only 1 tanker berth, no specific requirements.

GENERAL: Wind between N.E. and S.E. can give up to 1.6 m. high water and West wind up to 0.9 m. low water.

FRESH WATER: Water from wharf.

FUEL: Products are delivered in Koge, others from Copenhagen.

FIRE PRECAUTIONS: Normal fire precautions. Tankers cannot request to go to berth before loading/discharging. 2 fire watchmen from the fire department.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CUSTOMS ALLOWANCE: Tobacco: about 40 grams per day per man or 40 cigarettes per day per man. Wine and/or Spirits: about 0.25 litre spirits and 1 litre wine per man per day.

IDENTIFICATION CARDS: Not needed.

CONSULS: Nearest in Copenhagen.

REPAIRS: Small repairs.

DRY DOCKS: 2 small slipways for vessels up to 200 tons.

REPATRIATION: No facilities exist.

AIRPORT: Nearest is Kastrup Lufthavn; Copenhagen about 40 km. away.

TIME: GMT plus 1 hour. No change during year.

HOLIDAYS: Normal Danish holidays, change from year to year. Normally work can be arranged.

POLICE/AMBULANCE/FIRE: Ambulance and Fire (03) 653300; Police 651448 or use alarm 000.

TELEPHONE: No arrangements exist for placing on board.

GENERAL: The port North of Koge, Junckerhvnen, 55° 27′ 4″ N. 12° 118′ 7″ E. is a private port used only for vessels to the factory.

SERVICES: Pilot makes compass adjustments.

SHORE LEAVE: Allowed.

AUTHORITY: The Harbour Master.

KOLDING: 55.29 N. 09.29 E.

DOCUMENTS: See "Copenhagen".

PILOTAGE: Pilot station in Skaerbaek at mouth of Kolding Fjord. Tel. (05) 562486. VHF Channel 16.

ANCHORAGES: At Skaerbaek.

RESTRICTIONS: See "General" before first port.

MAX. SIZE: Maximum permissible length 180 m. Max. draft: 7.0 m.

RADIO: Lyngby Radio.

TUGS: Available.

STEVEDORES: Obtained through Agents.

MEDICAL: Hospital facilities available.

FRESH WATER: Available from quay.

FUEL: Available.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CUSTOMS ALLOWANCE: Tobacco: 200 cigarettes. Wine and/or Spirits: 1 bottle wine, 1 bottle spirits.

IDENTIFICATION CARDS: Not needed.

CONSULS:

Finland: J. Borum, Haderslevvej 25, Kolding. Tel. (05) 521233.

Iceland: V. Thorning–Petersen, Dalbygade 40, Kolding. Tel. (05) 520022.

Malta: Chr. Hindkjoer, Fabriksvej 27, Kolding. Tel. (05) 525533.

Norway: Eduard Christensen, Lasbygade 34, Kolding, Tel. (05) 527711.

Peru: Mercedes Ohmeyer, Kobbelhave 4, Strandhuse, Kolding. Tel. (05) 528981.

Sweden: Ove Gronborg, Osterbrogade 14, Kolding. Tel. (05) 522711.

REPAIRS: Only small repairs can be carried out.

AIRPORT: Distance from Billund Airport 40 km. Billund Airport is served by regular airlines.

TIME: GMT plus 1 hour.

HOLIDAYS: See "Copenhagen".

POLICE/AMBULANCE/FIRE: Police, tel. (05) 522800; Ambulance, tel (05) 522344; Fire, tel. (05) 522344, Help, tel. 000.

TELEPHONES: Telephones obtainable on board.

SHORE LEAVE: Allowed.

AUTHORITY: Harbour Master.

KYNDBY: 55.49 N. 11.53 E.

PORT LIMITS: Vessel is considered to be an "arrived ship" when passing the Breakwater to the port or when at anchorage waiting for berth.

DOCUMENTS:

Ship's Register.

Load Line Certificate.

Radio Safety Certificate.

Safety Equipment Certificate.

Derat Certificate or exemption.

2 Crew Lists.

Cargo Manifest or Bills of Lading.

Construction Certificate.

Certificate of Insurance or other financial security in respect of civil liabilities for oil pollution damage.

Tobacco and Spirit List, covering all goods on board belonging to crew, officers, Master, ship's bar or passengers.

Smallpox: When a ship arrives from places outside Europe and USA and has been at sea less than 14 days, each member of the crew has to present a valid smallpox certificate to the authorities on arrival.

PILOTAGE: Pilotage not compulsory. Pilot boards at the entrance of Isefjord and takes the vessel to the port and berths her. Pilots listening on VHF Channel 16.

Pilots to be ordered by ETA telegram to Agent at least 24 hours in advance.

ANCHORAGE: Larger vessels anchor in 15–20 m. of water either in the Isefjord or outside the entrance to the Isefjord. Holding ground good.

RESTRICTIONS: Arrival only by day-light. No tide by normal winds. Vessel's draft entering Isefjord not to exceed 22 ft. Also see "General" before first port.

MAX. SIZE: *Oilberth:* depth alongside: 21 ft. 6 in., one berth length 570 ft.

Coalberth: depth alongside 23 ft.

HEALTH: No special restrictions as to free pratique, which will be granted by authorities on arrival, however, see "Documents – Smallpox". Suspected disease or fever must be telegraphed to Agents before arrival.

RADIO: Lyngby Radio.

VHF: Channel 16 to Pilot Station (also Scaw Pilot).

RADAR: No installation.

TUGS: Available. Join at Isefjord, outside the entrance to the port of Kyndby, ship's lines to be used.

BERTHING: One Oilberth: length 570 ft., draft 21 ft. 6 in. One Coalberth: 530 ft. long, draft 22 ft. Water brackish.

CRANES: As berth private, only handling own coal cargoes – 3 cranes available.

STEVEDORES: Private stevedores to be ordered through receivers – coal discharge – rate per crane per hour: about 200 tons.

MEDICAL: All medical and hospital facilities available, no advance notice necessary.

TANKERS: 2 discharge hoses, one of 12 in. and one of 16 in.

No slop facilities.

One tanker berth, safe arrival draft: 21 ft. 6 in. Average discharge rate: 1,000 t.p.h.

DENSITY: Brackish.

FRESH WATER: By hose from quay – 10 t.p.h., D. Kr. 2.50 per ton.

FUEL: Available from all bigger companies by trucks or barge from Copenhagen – about 40 miles from Kyndby.

FIRE PRECAUTIONS: No specific precautions.

CONSULS: Nearest Copenhagen about 40 miles from Kyndby.

REPAIRS: All types of smaller repairs can be carried out.

DRY DOCKS: No dry dock available.

SURVEYORS: All bigger Classification Societies represented in Copenhagen about 40 miles from Kyndby.

GANGWAY/DECK WATCHMEN: Watchmen not to be recommended.

OPENING/CLOSING HATCHES: To be carried out by crew.

CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle of spirit.

CARGO GEAR: Shore coal cranes.

REPATRIATION: Can be arranged normally via Copenhagen about 40 miles from Kyndby.

AIRPORT: About 40 miles to Airport in Copenhagen.

TIME: Local time one hour ahead of GMT.

HOLIDAYS: Saturday/Sunday normally no work, and further no work on holidays declared as official Danish holidays.

POLICE/AMBULANCE/FIRE: 0–0–0 all alarms.

TELEPHONES: No telephone connection on board.

SERVICES: No tank-cleaning facilities; all other services to ships can be arranged through specialists from Copenhagen.

SHORE LEAVE: No restrictions.

IDENTIFICATION: No shore passes necessary.

REGULATIONS: None.

DELAYS: None.

DEVELOPMENTS: None at the present time.

AUTHORITY: Private port owned by: Elektricitetsselskabet "Isefjordvaerket" I/S., Hellerup. Local office: Kyndbyvaerket.

NAESTVED: 55.14 N. 11.45 E. (See Plan Book)

DOCUMENTS: See "Kalundborg".

PILOTAGE: Compulsory between the entrance to Karrebaeksminde and Naestved for all ships over 150 g.r.t. VHF Channel 16. Tel. 03–727366 and 03–742397.

ANCHORAGES: 1 – 2 miles S.W. of head light in Karrebaeksminde in 10 – 12 m. depth.

RESTRICTIONS: Only navigable from half hour before sunrise to half hour after sunset, and according to tides. Also see "General" before first port.

MAX. SIZE: Max. length 100 m. Max. draft 5.60 m. with breadth 12.20 m. Max. breadth 14.40 m. with draft 4.80 m.

HEALTH: See "Kalundborg".

RADIO: Lyngby radio. VHF Channel 16.

TUGS: m/s "Eno" 360 h.p. VHF Ship's lines.

BERTHING: No berthing in Karrebaeksminde. Naestved 3 quays: 365, 270, 170 m., all with depth 6 m.

BRIDGES: One in Karrebaeksminde, total width 23.3 m.

MEDICAL: Hospital available.

FRESH WATER: Available from quay, 10 t.p.h.

FUEL: All grades. Deliveries by lorry only.

AIRPORT: Kastrup Airport, Copenhagen 90 km. away.

TIME: GMT plus 1 hour.

SHORE LEAVE: No restrictions.

AUTHORITY: Harbour Master.

NAKSKOV 54.50 N 11.08 E.

PILOTAGE: Al Albuen at the entrance of the firth.

RESTRICTIONS: Sailing in the harbour at night-time with help of projector only. Also see "General" before first port.

MAX. SIZE: Draft: 19 ft., Length: 660 ft., Breadth: 70 ft., Height: None — no bridges to pass.

TUGS: Tug available, with 24 hours notice.

BERTHING: Protected from all winds. Depth up to 20 ft. 6 ins (6.3 m). 7,500 ft. of quay. In the fairway leading up to the harbour there is a depth of 20 ft. 6 ins (6.3 m.), distance about 6 miles.

CARGO HANDLING FACILITIES: Tracks along the quays in connection with the railway station and all Danish Railways. Also good road connections.

3 grain silos: 4,000, 12,000 and 15,000 tons 3 grain elevators loading 90, 80 and 50 t.p.h. respectively. 1 grain elevator discharging rate 40 t.p.h. 4 mobile belt conveyors loading up to 100 t.p.h. 2 mobile cranes (20 tons lift) — also grab and polygrab.

MEDICAL: Treatment of all kinds possible.

FRESH WATER: Available.

FUEL: Available.

CONSULS: Dutch, Finnish, French, Norwegian and Swedish.

DRY DOCK: Shipyard provided with 2 dry docks up to 32,000 d.w.t., building slips up to 35,000 d.w.t. Cranes to lift up to 100 tons.

AGENT: Casper Andrea's Succrs. Havnegade 33, PO Box 66, DK-4900 Nakskov, Denmark. Phone: 03-923333 Telex: 47545 andrea dk. Tlgms: Andrea Nakskov.

NYBORG: 55.19 N. 10.49 E.

DOCUMENTS:

Health Declaration.
Customs Declaration.

PILOTAGE: Required notice ETA 6 hours. Pilot boat VHF Channel 16. Belt Pilot, station Spodsbjerg Tel: 09–50 15 35, Office Nyborg 09–310089.

ANCHORAGE: South of Knudshoved Lighthouse. Depth 16 m. (52 ft.). Small vessels anchor S.W. of Avernakke Pynt.

RESTRICTIONS: See "General" before first port.

MAX. SIZE: Avernakke Pynt Bro (Oilpier) draft 32 ft. length about 600 ft. Vesterhavn draft 24 ft. length about 400 ft.

RADIO: Lyngby Radio.

TUGS: One tugboat normally stationed in the port. Tugs required notice 8-10 hours.

STEVEDORES: Ordered by Agent.

MEDICAL: Hospital facilities available.

TANKERS: Discharge at Avernakke. Discharge lines 8 in. and 10 in.

DENSITY: About 1005.

FRESH WATER: Supply by pipe-line to berths.

FUEL: All grades available.

GANGWAY/DECK WATCHMEN: Not compulsory.

OPENING/CLOSING HATCHES: Crew allowed open and close, otherwise according Charter Party.

CUSTOMS ALLOWANCE: Tobacco, 100 cigarettes for 3 days. Wine and/or Spirits; 1 bottle spirit for 3 days.

IDENTIFICATION CARDS: Not required.

CONSULS: Finland 311198, Norway 310737, Sweden 312106.

In Odense (near Nyborg);

Great Britain	115456	France	118700
Holland	115456	Iceland	120076
Portugal	120012	Spain	127781
W. Germany	972323		

REPAIRS: Most repairs possible.

DRY DOCKS: 500 d.w.t.; slipway 70 d.w.t.

AIRPORT: Nearest airport, Beldringe, Odense.

TIME: GMT plus 1 hour.

HOLIDAYS: New Year's Day; Maundy Thursday; Good Friday; Easter Monday; Prayer Day, Ascension Day; Whit Monday; Christmas Day; Boxing Day.

POLICE/AMBULANCE/FIRE: Police 311448; Ambulance 000; Fire 000.

SHORE LEAVE: No restrictions.

AUTHORITY: Havnefoged, Havnekontoret.

NYKOBING: 55.55 N. 11.41 E.

DOCUMENTS:

Ship's Register.
Loadline Certificate.
Derating Certificate.
Crew List stating quantity of cigarettes, cigars, tobacco, cigarette paper, spirits, wine and guns.
Cargo List.

PILOTAGE: Pilot ordered through Agents and will board at Skellerev or Argus Ground (both outside Guldborg bridge).

ANCHORAGE: By Skellerev, safe ground.

RESTRICTIONS: Port only accessible by daylight, max. draft 19 ft. 6 in., max. breadth for passing Guldborg bridge 25 m. Entrance from South (Gedser) not recommended, as depth of water in the Southern part of Guldborgsund only amounts to 8 ft. Also see "General" before first port.

RADIO: For vessels coming through the Kiel Canal, Kiel Radio could be used, otherwise nearest station Lyngby Radio.

TUGS: Available on request.

BRIDGES: Vessels calling Nykobing Falster have to pass Guldborg

bridge about 8 miles North of harbour. Bridge, breadth 25 m., opens by request after sunrise and half an hour after sunset (from 1st Nov. to 1st March from half an hour before sunrise). When requesting passage use international flag "N" on half foremast and give one long and one short blast.
STEVEDORES: Ordered by Agents on receiving vessel's ETA.
MEDICAL: No advance notice required for medical attention.
FRESH WATER: Supplied from quay installations.
FUEL: All grades obtainable – delivered by tank lorry.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Carried out by crew.
TOBACCO/WINE ALLOWANCES: Each crew member 100 cigarettes (or corresponding quantity of tobacco) and 1 bottle spirits.
IDENTIFICATION CARDS: Not necessary.
CONSULS:

Norway
Sweden
West Germany
Netherlands
Finland

REPAIRS: Small deck and engine repairs possible.
AIRPORT: Nearest at Copenhagen (2 hours by train.)
TIME: No alteration to clocks. GMT plus 1 hour.
HOLIDAYS: New Year; Maundy Thursday; Good Friday; Easter Monday; Prayer Day; 1st May (Labour Day, half only); Ascension Day; Whit Monday; Constitution Day (5th June, half only); Christmas and Second Christmas Day.
POLICE/AMBULANCE/FIRE: Dial 0–0–0 and ask for police, ambulance or fire service.
SHORE LEAVE: Crew members may go ashore without any restrictions.

ODENSE: 55.25 N. 10.23 E. (See Plan Book)

DOCUMENTS:

Ship's Register.
Load Line Certificate.
Radio Safety Certificate.
Safety Equipment Certificate.
Derat Certificate or exemption.
1 Crew List.
Stores List.
1 Crew Personal Effects List.
1 Cargo Manifest or Bills of Lading.

PILOTAGE: Compulsory between Gabet and Stige for all tankers of 1,500 d.w.t. and over. Pilotage compulsory between Stige and Odense for all vessels of 150 g.r.t. and over. Contact Odense Fjord Pilot (Gabet-Stige) on VHF Channel 16. Odense Fjord Pilot boards just North of light-buoy 2A outside of Gabet. In bad weather the Pilot will board inside of Gabet between light-buoys 2 and 4. Stige Pilot (Stige-Odense) boards at Stige and operates on VHF Channel 12.
ANCHORAGE: Inside of Gabet in depths of 7.5 m. Larger vessels anchor outside of Gabet.
RESTRICTIONS: Port is entered through dredged canal, 22 m. wide, 7.5 m. deep. Navigation usually throughout the year. Ice-breaker assistance available if necessary. Vessels over 3,000 d.w.t. enter in daylight only. Speed limit of 6 knots in entrance canal. Arriving ships must wait for vessels leaving port. Also see "General" before first port.
MAX. SIZE: Draft, max. 7.0 m. fresh water, length, max. 160 m. controlled by swinging basin and draft.
HEALTH: Pratique granted by Customs Officers who bring Health Declaration for Masters to complete. In event of suspected disease or fever on board radio details to Agent before arrival. When vessel arrives from port outside of Europe and U.S.A. and has been less than 14 days at sea, all crew members require valid smallpox vaccination certificates.
RADIO: Lyngby Radio.
VHF: Port Authority, tug and Stige Pilot communicate on Channel 12, Odense Fjord Pilot on Channel 16.
TUGS: Tug is available (660 h.p.). Not compulsory but necessary for large vessels. Tug normally joins vessels in port. Large vessels at Gabet. Ship's line.
BERTHING:— Three harbour basins including 4,200 m. of quays with depth of 7.5 m. alongside. Coal quays at Fynsvaerket, depth 7.5 m. alongside.
CRANES: At Basin I: one 6-ton crane with polyp-grab if needed, and one 3.5-ton crane.
At Basin II: two 3.5-ton cranes both with grab if needed.
At Basin III: two 6-ton cranes, one 15-ton crane and one 50-ton crane.
Quay along the canal: eight private cranes with grab.
At Fynsvaerket: three cranes with grab.
Also available in the port: two 6-ton mobile cranes. No floating cranes.
BULK CARGO FACILITIES: Five private suction-installations for grain, etc. Coal and chemicals are handled by crane.
SPECIAL CARGO FACILITIES: Berths available for handling of containers and Ro-Ro traffic. Installation for liquefied ammonia.
BRIDGES: No bridges but powerlines max. height 45 m.
STEVEDORES: To be arranged through Agent.
MEDICAL: Doctors and hospital facilities anytime. Arrange through Agent.
TANKERS: Two berths length 160 m. each, depth 7.5 m. also one jetty, depth 6 m.
DENSITY: 1003.
FIRE PRECAUTIONS: In addition to the usual precautions a firefighter is posted at the vessel while in the port when the cargo is petrol, kerosene, etc.
AIRPORT: Situated 15 km. from the harbour. 3–5 flights a day to and from Copenhagen.
POLICE/FIRE/AMBULANCE: Dial 000 and ask for service required.
CONSULS: All European countries represented.
FRESH WATER: Available by pipe-line at all berths. Rate: 10–15 t.p.h.
FUEL: All grades available by road transport.
CUSTOMS ALLOWANCES: 200 cigarettes, 1 bottle wine and 1 bottle of spirits permitted out of bond for each man.
TIME: GMT plus 1 hour. No alterations during the year.
HOLIDAYS: New Year's Day; Maundy Thursday; Good Friday; Easter Monday; Prayer Day; Ascension Day; Whit Monday; Christmas Day; Boxing Day.
Half-holidays: May 1st, June 5th and December 24th. Work can be arranged.
REPAIRS: All engine and boiler repairs can be effected.
DRY DOCKS: One 500,000 d.w.t. and three 100,000 d.w.t. dry docks in Lindoe Shipyard and one 500 d.w.t. slipway in port.
SURVEYORS: N.V. and Lloyd's.
HATCHES: Normally opened by ship's crew.
REPATRIATION: Can be arranged.
TELEPHONES: No telephones on board.
SERVICES: Compass adjustment can be arranged.
SHORE LEAVE: No restrictions.
IDENTIFICATION CARDS: Not necessary.
REGULATIONS: Nothing unusual.
DELAYS: None.
AUTHORITY: The Harbour Office, Odense.

RANDERS: 56.29 N. 10.04 E. (See Plan Book)

DOCUMENTS:

2 Crew Lists
2 Lists with statement of each Crew member's cigarettes, tobacco and spirits.

PILOTAGE: Apply for Pilot 6 hours before arrival. VHF Channel 16, one hour before. Pilot station, Tel: 06-485024.
ANCHORAGE: Outside Entrance buoy in 8 m.
RESTRICTIONS: Only vessels less than 1,000 d.w.t. may enter at night. Also see "General" before first port.
MAX. SIZE: Max. length, 475 ft.; breadth, 57 ft.; draft, 19 ft.
HEALTH: No special requirements.
RADIO: Lyngby Radio and Skaw Radio.
VHF: VHF service from Harbour Office, Channels 12, icebreaking 16.
TUGS: 500 h.p. tugs available – use ship's lines.
STEVEDORES: Ordered by Agents. Working periods: Monday to Friday 0730-1130 hrs., 1200-1615 hrs.; Saturday no work.
MEDICAL: Hospital facilities available.
TANKERS: 6 in. and 8 in. discharge lines; no slop facilities.
DENSITY: Brackish in port area. No tide.
FRESH WATER; Shore installations.
FUEL: All grades. Deliveries by lorry only.
GANGWAY/DECK WATCHMEN: Available but not compulsory.
OPENING/CLOSING HATCHES: By crew.
CERTIFICATES: Tonnage Certificate, Derating Certificate, Load Line Certificate.
CUSTOMS ALLOWANCES: Each crew member 100 cigarettes or 25 cigars or 100 grams tobacco, and 1 bottle spirits and 1 bottle wine meant for 3 days.
IDENTIFICATION CARDS: Not required.
CONSULS: Norway (06) 42 61 00, Finland (06) 42 51 11, Sweden (06) 420022, Iceland (06) 42 55 55.
REPATRIATION: Several hotels and Seamans' Home.
REPAIRS: Engine repairs and minor repairs.
SURVEYORS: Arranged by Agent.
AIRPORT: Tirstrup Airport 40 km. from Randers, 5–7 daily connections with Copenhagen.
TIME: GMT plus 1 hour.
HOLIDAYS: 1st January (New Year); Maundy Thursday, Good Friday, Easter Monday; 1st May from 1200 hrs. (Labour Day); Whit Monday from 1200 hrs.; 24th December from 1200 hrs.; 25-26th December (Christmas).
POLICE/AMBULANCE/FIRE: Tel. 000.
AUTHORITY: Harbour Master, Randers Havnevaesen.

RODBY: 54.39 N. 11.20 E. (See Plan Book)

DOCUMENTS:

1 Crew List.
1 Passenger List.
1 Stores List.
1 Manifest or Bill of Lading.

PILOTAGE: As the harbour is so easily accessible there is no Pilot. A person with local knowledge may be engaged by calling ferry "Danmark" VHF 16.

ANCHORAGES: At a distance of 1.5–2 miles, bearing S.E. – S.S.E. of approaching buoy, depth of water 10 m.
RESTRICTIONS: See "General" before first port.
REGULATIONS: Ferries owned by D.S.B. or D.B. (Trainferries) have priority using the entrance.
MAX. SIZE: Largest vessel Length 80 m. Draft 4.5 m. Depth of water in North and West Basin: 5 m. N.E. Storm can give rise of up to 1.5 m. S.W. – Storm can give fall of 1.2 m. on daily depth.
HEALTH: No Certificates required.
RADIO: All messages via "Lyngby Radio".
TUGS: None.
BERTHING: Quay length 518 m. equipped with 3 mobile cranes 8, 15 and 25 tons capacity. Two grain silos, loading capacity 60–90 t.p.h.
STEVEDORES: Provided by "Rodby Shipping" Telephone 03. 905522. Telex 40022 or Shipbroker A. Hovmand, Telephone 03. 888011, Telex 40256.
MEDICAL: 2 hospitals available.
FRESH WATER: Can be supplied alongside the quay.
FUEL: Obtainable alongside the quay.
OPENING/CLOSING HATCHES: By crews or stevedores, ship's option.
CERTIFICATES: On arrival, ships register only.
CUSTOMS ALLOWANCE: 200 cigarettes, 1 litre spirits and 3 litres wine.
IDENTIFICATION CARDS: Not required.
AIRPORT: Maribo Airport, 14 km.
SHORE LEAVE: After clearing inwards, Crew members are allowed to go ashore without special permission.
AUTHORITY: Harbour Master.

RONNE: 55.06 N. 14.42 E. (See Plan Book)

DOCUMENTS:
1 Crew list.
1 Passenger List.
1 Customs Declaration.
1 Declaration for crew's tobacco, spirits, etc.
1 Declaration of Health.
1 Declaration to Police, number of crew, passengers, etc.
1 Bill of Lading (or Manifest).
PILOTAGE: Apply for Pilot via Ronne or Lyngby Radio, advance notice not less than 1 hour. Pilot listens continuously on VHF. Call Ronne Pilot or Ronne Harbour. Area where Pilot to be taken on board is by Ronne light-buoy, 2 miles S.W. of the harbour; if weather bad pilot boat guides the ship inside the breakwater and then Pilot boards.
ANCHORAGE: No safe anchorages outside the harbour.
RESTRICTIONS: See "General" before first port.
MAX. SIZE: Max. length 400–450 ft., draft 22 ft. There is no tide.
HEALTH: No special procedure necessary, but if there is suspected disease or fever on board or ship comes from area with fever, etc., call for quarantine doctor. If ship's last call was Danish port pratique automatic.
RADIO: Ronne Radio, call-sign OYE; or Lyngby Radio, call-sign OXZ.
VHF: Listens on Channel 16. Working Channels 12 and 13. Same in tug and Pilot boat. Mainly traffic concerning pilotage and harbour operations.
RADAR: Located at Pilot station, mostly look-out aid, but advice on entering can be given.
TUGS: Normally join the vessel inside breakwater; ship's lines to be used.
BERTHING: 3 berths equipped with hydraulic ramps for roll-on/roll-off traffic via stern or head only, one of which is suitable for ships up to 450 ft. length, 65 ft. beam, draft 21 ft.

3 berths for sand loading 400–600 t.p.h., for vessels up to 350 ft. length, 21 ft. draft.

2 berths for macadam loading 400 t.p.h., for vessels up to 300 ft. length, 21 ft. draft.

1 permanent heavy lift crane with 30 ton capacity is situated on pier 23.

1 grab-crane, capacity 100 t.p.h. is situated on pier 13.

3 mobile cranes with capacities up to 12 tons are available for both hook and grab operations.

Also berths for handling coal and grain.
STEVEDORES: To arrange gangs Monday morning, advices have to be given Friday before 1100 hrs. To arrange work other days, notice must be given before 1600 hrs. the day before.
MEDICAL: Hospital facilities are available. It is not necessary to give advance notice.
TANKERS: Two berths for coastal tankers draft up to 22 ft., length up to 300 ft.
FRESH WATER: Available 10–12 t.p.h.
FUEL: Light fuel, Redwood 200 sec. Heavy fuel 3500 sec., also 1000 and 1500 sec. Notice 6 hours ETA.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Carried out by crew.
CERTIFICATES: Nationality Cert., Derat. Cert., Load Line Cert. Radio Cert. (Safety Cert. for passenger ships only).
CUSTOMS ALLOWANCE: Tobacco: 40 cigarettes or other tobacco per day. Wine/Spirit: half a bottle per day.
IDENTIFICATION CARDS: Not needed.
CONSULS: The following countries are represented in Ronne: Sweden, Finland, France, Netherlands, Norway and West Germany.
REPAIRS: All kinds of repairs can be carried out.
DRY DOCKS: Only small ships up to 350 tons.
REPATRIATION: Possible.
AIRPORT: 3 miles, served 3–5 times per day by SAS to Copenhagen.
TIME: GMT plus 1 hour. No alteration.
HOLIDAYS: New Year's Day; Easter, 3 days Thursday, Friday, Easter Day (Monday); May 1; Whit Monday; June 5; Christmas Eve; Christmas Day; 2nd Christmas Day. Cargo work only possible for foodstuff, etc.
SERVICES: Compass adjustment at Duc d'Albe in Southern part of Forhavn.
SHORE LEAVE: Allowed.
DEVELOPMENTS: Piers Nos. 2 and 3 are under reconstruction.

A turning Dolphin is under construction approx. 40 m. South of Pier No. 11.

The dredged area has been extended as shown on the plan.

The Dolphin West of Pier 22 is used for compass adjustment.

The reconstruction of the North Harbour and the extension of the dredged area will enable the Port to handle bigger ferries, which is planned to serve the domestic routes from October 1978.

The reconstruction will be completed about May 1979.
AUTHORITY: Harbour Master.

SKAERBAEK: 55.31 N. 09.37 E. (See Plan Book)

DOCUMENTS:
Ship's Register.
Load Line Certificate.
Radio Safety Certificate.
Safety Equipment Certificate.
Derat Certificate or exemption.
1 Crew List.
Stores List.
Crew Personal Effects List.
Cargo Manifest or Bills of Lading.
PILOTAGE: Not compulsory. Pilot joins at mouth of Kolding Fjord. Can be contacted by VHF Channel 16.

Bigger ships usually take Pilot by Skaw L/V. Pilots to be ordered by ETA-telegrams to SKAWPILOT Skagen, at least 12 hours in advance. Skawpilot listening on VHF Channel 16.
ANCHORAGE: Off Skaerbaek in depths of 39 ft.
RESTRICTIONS: Depth at tanker berth, 39 ft. normal water level. Max. length b/CM:125 m. Also see "General" before first port.
RADIO: Lyngby Radio.
TUGS: Available, at short notice.
BERTHING: Power station wharf: 260 m. length; depth alongside 23 ft. Oil Jetty: depth 39 ft.
TANKERS: Discharge at jetty through 3×12 in. loading arms.
MEDICAL: Medical attention available, nearest hospitals at Kolding and Fredericia.
REPAIRS: Local machine shops can manage small repair jobs.
FRESH WATER: Obtainable from quay.
FUEL: Not available.
CONSULS: Nearest at Kolding. Distance 15 km.
CUSTOMS ALLOWANCES: 200 cigarettes, 1 bottle wine and 1 bottle spirits permitted out of bond for each man.
TIME: GMT plus 1 hour. No alterations during the year.
HOLIDAYS: New Year's Day; Maundy Thursday; Good Friday; Easter Monday; Prayer Day; Ascension Day; Whit Monday; Christmas Day; Boxing Day. Half holidays: May 1st, June 5th and December 24th.
AIRPORT: Billund Airport, 40 km. distant.
AUTHORITY: Sydostjydske Faellescentral Skaerbaekvaerket.

SONDERBORG: 54.55 N. 09.47 E.

DOCUMENTS:
Ship's Register.
Crew List.
Crew Manifest.
Radio Safety Certificate.
PILOTAGE: Vessels exceeding 20 ft. in draft or 3,000 gross tonnage use Northern entrance where Pilot boards vessels at buoy 4 or 7, route 25.

Ships coming from South (passing harbour bridge) contact Pilot boat at buoy 6 or 7 route 8. Pilot not compulsory. VHF on Pilot station. Harbour Master and Pilot tel. 044 22765.
RESTRICTIONS: No restrictions night entry. No tide. N.E. to E. winds raise water level up to 3 in. S.W. to N.W. winds lower it by same amount. Also see "General" before first port.
TUGS: Available; 6 hours notice required.
BERTHING: *South Harbour:* Mainly used by small passenger and fishing boats.

North Harbour: Concrete quay about 2,000 ft. long, depth alongside 24 ft. At plywood factory, dolphin moorings up to 29 ft. draft. Harbour is divided into above mentioned two parts by a rail bridge. Lifting sections 98 ft. wide. Submarine cables in area from 50 yd. South of bridge to 100 yd. North.

FRESH WATER: Supplied by pipe-line to berths.
FUEL: Available.
REPAIRS: Two slipways. 100 and 500 tons capacity.
AIRPORT: In Sonderborg, Regular airline inland.
TIME: GMT plus 1 hour.
AUTHORITY: Harbour Master.

SVENDBORG: 55.03 N. 10.38 E. (See Plan Book)

DOCUMENTS:
Certificate of Registry.
Freeboard Certificate.
Derat Certificate.
Crew List.

PILOTAGE: Telegraphic address, "Pilotstation, Svendborg". For contacting pilot boat on VHF, use Channel 16. International signals for Pilot. In Eastern entrance Pilot boards at Thuro Rev. In Western entrance Pilot boards at Lehnskov, or if ordered at Skrams Flak.
ANCHORAGE: At Lunkebugt (Eastern entrance) and by Lehnskov (Western entrance).
RESTRICTIONS: See "General" before first port.
MAX. SIZE: Longest ship ever docked was 541 ft. long, 67 ft. breadth, draft 22 ft. 06 in. Shorter ships may enter with deeper draft.
HEALTH: Pratique automatic.
RADIO: All Danish coast stations can be used. (See "Horsens".)
TUGS: Normally tugs stationed in Svendborg, ships wanting tugs order through Agent before arrival.
BRIDGES: 1 mile West of harbour a bridge crosses the sound. Free height 33 m.
STEVEDORES: Ordered by Agent.
MEDICAL: Doctors and hospital service always available.
DENSITY: Approx. 1024.
FRESH WATER: Available at all piers. 20 t.p.h.
FUEL: No bunker lines. Diesel can be delivered by tank cars.
GANGWAY/DECK WATCHMEN: Available, but not compulsory.
OPENING/CLOSING HATCHES: Normally carried out by crew.
CUSTOMS ALLOWANCE: Tobacco: 40 cigarettes or 40 gr. tobacco. Wine/Spirit: 0.25 litre.
IDENTIFICATION CARDS: Not needed.
CONSULS: Vice-Consulates: Norway, Tel. 09 21 31 17; Sweden, 09 21 14 10; Finland, 09 21 22 21; W. Germany, 09 21 15 39; Iceland, Tel. 09 21 42 83.
REPAIRS: All repairs to deck and machinery carried out by shipyard.
DRY DOCKS: Floating docks for ships up to 10,000 d.w.t.
REPATRIATION: Facilities exist.
TIME: GMT plus 1 hour (same all year).
HOLIDAYS: New Year's Day; the day before Good Friday; Good Friday; Easter Monday; May 1st; Ascension Day; May 5th; Prayer Day; Whit Monday; June 5th; 25th and 26th of December.
FIRE/AMBULANCE/POLICE: Call 000.
TELEPHONE: No telephone for ships.
SERVICES: Compass adjusting.
SHORE LEAVE: No restrictions concerning shore leave for crew. Dogs not allowed to go ashore.
AUTHORITY: Harbour Master.

VEJLE: 55.42 N. 09.33 E. (See Plan Book)

DOCUMENTS: Required on arrival:
2 Crew Lists.
2 Passenger Lists.
1 Tobacco List.
1 National Reg. Certificate.
1 Load Line Certificate.
1 Tonnage Certificate.
1 Manifest.
1 Bill of Lading.
1 Derating Certificate.
1 Radio Safety Certificate.
1 Clearance inward and outward.
1 Safety Certificate.

PILOTAGE: Pilot station now at Juelsminde, radio Pilot Vejle VHF Channel 16 – 3 hours notice of ETA. The Pilot will embark and disembark at Rosenvold Hage on the N-side of the fjord.
ANCHORAGE: (1) At Rosenvold Hage, (2) at Traeskohage.
RESTRICTIONS: See "General" before first port and "Developments".
MAX. SIZE: Length max. 550 ft., max. draft 23 ft.
HEALTH: Pratique procedure is carried out by customs dept.
RADIO: Lyngby Radio, OXZ, Blaavand Radio OXB.
TUGS: Available inside port, ship's lines.
STEVEDORES: Available. 0700 hrs. start must be informed 24 hours in advance.
MEDICAL: Hospital facilities available day and night with doctors available 24 hours per day.
TANKERS: 2 tanker berths, max. draft 23 ft. No slop tank available. Diameter of discharge lines 8 in. and 6 in.
DENSITY: Average density 1020.
FRESH WATER: Delivered from lines on piers. 14 t.p.h.
FUEL: All grades available. No advance notice required.
GANGWAY/DECK WATCHMEN: Not required.
OPENING/CLOSING HATCHES: Carried out by crew.
CUSTOMS ALLOWANCE: Tobacco: 200 cigarettes, Wine and/or Spirits: 1 bottle of each.
IDENTIFICATION CARDS: Not needed.
CONSULS: Vice-Consuls: Greece, 821929; Norway, 829122; Spain, 820233; Germany, 820011.
REPAIRS: Deck and engine repairs can be undertaken.
DRY DOCKS: None.
REPATRIATION: No facilities.
AIRPORT: Billund 32 km., 3 flights per day.
TIME: GMT plus 1 hour.
HOLIDAYS: New Year's Day; Easter; 1st May, Whit Sunday, Christmas holidays. Cargo work can be done on overtime except 1st May (Labour Day).
POLICE/AMBULANCE/FIRE: Police, tel. 821744; Ambulance, 822244; Fire, 822244.
TELEPHONES: No arrangements exist for placing on board.
DEVELOPMENTS: A highway-bridge is being built over the fjord over the entrance-channel about 1 mile outside the harbour entrance. The bridge will be opened in Autumn 1979. Max. height over the channel, 40 m.
SHORE LEAVE: Allowed for all crew.
AUTHORITY: Harbour Master.

VORDINGBORG (South Harbour – formerly Masnedsund): 55.30 N. 11.54 E. (See Plan Book)

DOCUMENTS: See "Copenhagen".
PILOTAGE: Available from Masnedoe Pilot Station tel. 03-770355.
ANCHORAGE: Vordingborg Roads.
RESTRICTIONS: See "General" before first port.
MAX. SIZE: Draft 21 ft. max., breadth 25 m. owing to passage of bridge before entering harbour. Width of bridge opening 25 m. At a height of 25 m., width of opening 22 m. due to angle of raised bridge. Max. breadth recommended 20 m.
RADIO: Lyngby Radio.
TUGS: Available from Nakskov, Korsoer, Copenhagen. Notice for towage about 6/8 hours.
BERTHING: Berths equipped for handling grain, ore, coal, liquid chemicals and LPG carriers.
MASNEDOE POWER STATION: Private harbour. Draft 21 ft. Fresh water available. Pilotage, towage, as for Vordingborg.
BRIDGES: Passage of bridge 25 m. wide, opening day and night. Bridge normally in radio contact with pilot station. Fully lighted. Approach to power station from the west – pier situated just to the west of opening bridge, and therefore no passage.

In the approach to Vordingborg and power station passage of overhead power cables, max. air-draft 36 m.

STEVEDORES: Local stevedores ordered by Agent.
MEDICAL: Hospital available.
FRESH WATER: Supplied by pipe-line to berths.
FUEL: All common fuels available.
GANGWAY/DECK WATCHMEN: Available but not compulsory.
OPENING/CLOSING HATCHES: Crew allowed to open and close, otherwise as per C/P.
CERTIFICATES:
Registered Certificate of tonnage.
Derating Certificate.
Construction Certificate.
Load Line, and Equipment Certificate on first call.

CUSTOMS ALLOWANCE: About 200 cigarettes and a limited amount of spirits each man.
CARGO GEAR: 2 mobile cranes, one grain-sucker and elevator, one coal crane.
IDENTIFICATION CARDS: Not required.
CONSULS: At Copenhagen.
REPAIRS: Most repairs, engine and equipment available. Electronic service only available from Copenhagen.
DRY DOCK: No local dry dock. Nakskov/Copenhagen nearest.
HOLIDAYS: See "Copenhagen".
POLICE/AMBULANCE/FIRE: Police 03-771448; Ambulance, Fire Brigade 0–0–0.

NOTES

Please also advise Shipping Guides Ltd.

Djibouti, Republic of

DJIBOUTI: 11.36 N. 43.08 E. (See Plan Book)

DOCUMENTS: Crew List for ship's Agent. Crew Manifests and Manifests of Passengers in transit or for disembarkation, for whom disembarkation cards are to be completed. Presentation of Health Declaration and verification of compulsory immunisations by the health representative. Cargo Manifest, required in 5 copies prior to any discharging operations, also deposit of 1 copy at port operation office.

PILOTAGE: Compulsory. Pilot boards in vicinity of buoy No. 2 of the Heron Bank, where all vessels must wait. Call signals are regulated by International Code. Vessels at the quay wishing to put to sea must call Pilot half an hour beforehand by 3 long blasts (in addition to the "G" flag). VHF radiotelephony station to liaise with ships. Ships must ensure a permanent watch on Channel 12, at the latest after clearing parallel of Muskali beacon.

MAX. SIZE: Entrance to inner roads dredged to 11 m. depth.

ANCHORAGE: Anchorage zone is within following limits:

1. Eastern limit: a line parallel to and 0.25 miles West of the North passage.

2. Southern limit: Latitude 11° 37′ N.

3 Western limit: a bearing with the Western extremities of Penguin and Ambouli Banks in alignment.

It is forbidden to anchor 1.5 cables on each side of the alignment of Ambouli and d'Ayabele lights.

Average depth is of 15 to 20 m. Anchor hold is excellent, even with a strong S.W. monsoon when there is often a heavy swell.

RESTRICTIONS: Entry during the day or night. Highest tide 2.90 m. Mean tide is approximately 1.60 m., and lowest are 0.20 m. Tidal currents are very weak in bay and rarely exceed 1 knot.

HEALTH: Generally free pratique by radio can be granted to all ships applying through Coastwise Station Djibouti Radio. Ships must radio in plain or international code, a maximum of 12 hours and a minimum of 4 hours prior to arrival in port. In all cases, when Pilot boards vessel he gives Captain a copy of Maritime Health Declaration which must be filled in by Captain and countersigned by ship's doctor, if the crew includes one. An examining official comes on board when vessel arrives to receive the Maritime Health Declaration. Smallpox certificate required from all travellers coming from all countries. Cholera certificate required from all travellers coming from an infected area, excepting children of under 6 months of age.

RADIO: For short distance communications, ships contact shore by radio telephone VHF through Harbour Master's office. Port office is equipped with a VHF station transmission and reception: Channel 12 (156.6 mHz) and 16 (158.8 mHz). For medium or long distance communications, ships contact shore by radiotelegraphy and radiotelephony through Djibouti coastwise station, call sign: TXZ; call frequency: 8.682 and 500 kc/s; working frequency 8.682 and 464 kc/s.

TUGS: In Winter (slight Easterly monsoon), a single tug is generally sufficient for manoeuvring. In Summer during the Khamsin period, berthing or sailing often requires 2 tugs. There is a 1,500 h.p. diesel tug *Aboubaker Pacha*, a 1,800 h.p. tug, *A. Rimbaud*, a 1,320 h.p. diesel tug *Henri Lambert*, a 1,000 h.p. tug *Administrateur Bernard* and 1 auxiliary 600 h.p. tug.

BERTHING: exterior docks comprise:

Dock 11	depth of 11 m.
Dock 12	depth of 12 m.
Dock 10	depth of 11 m.
Dock 13	depth of 10.80 m.
Dock 9	depth of 9 m.

Average depth of remaining roadstead is between 15 and 20 m.

CRANES: There are no cranes on quays, but the port has 2 mobile cranes of 15 tons and 25 tons capacity plus a floating crane for the handling of heavy-lifts of 70 tons capacity.

BULK CARGO FACILITIES: Molasses can be handled.

SPECIALISED CARGO HANDLING FACILITIES: Open ground and shedded areas for containers, Roll-on/Roll-off traffic and Quay for the traffic of lighters.

STEVEDORES: Four companies available, office hours from 0700 to 1730 hrs. Stevedoring 24 hours.

MEDICAL: Port Medical Service directed by medical practitioner specialised in industrial medicine is situated in a building neighbouring the port offices. It operates a dispensary. Passengers and sailors in transit are treated by private doctors from town who may visit the ships. Serious cases can be hospitalised in Djibouti's civil or military hospitals.

TANKERS: Reception lines: Berths 12 to 13 specially equipped for reception of bunkering products are linked with installations of the petroleum companies by a 16-in. dock-line and 12-in. (FO) and another of 12-in. (DO). Pier No. 10 is connected to the installation with a dock-line of 12-in. Rate of discharging can reach between 2,000 and 2,500 t.p.h. Reception of white products is assured from quay No. 13 by an 8-in. line; for gas there is a 4-in. line.

FRESH WATER: Each quay provided with 3–5 (200 mm.) water-hydrants. Delivery of 40 cu.m. of water per hour. Regardless of the season, there is never any shortage of fresh water.

FUEL: A complete range of different viscosities and products is available. Meets all the usual requirement of bunkering vessels. Ample supplies of fuel and diesel oil are always available.

GANGWAY/DECK WATCHMEN: Available.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

IDENTIFICATION CARDS: Required.

CONSULS:

Belgium
Egypt
Ethiopia
France
Great Britain
Iraq
Italy
Libya
Oman
Saudi Arabia
Somalia
Sudan
Yemen (N)
Yemen (S)
U.S.A.

REPAIRS: Small repairs available.

REPATRIATION: Good facilities exist.

AIRPORT: International airport with regular and local flights.

HOLIDAYS: New Year's Day (1 January); Aid Seghir (El Fithir) and the following day; Labour Day (1 May); Aid El Kebir and the following day; Muslim New Year (1st Mouharam); National Holiday (27 June); Mouloud El Nabi; Al yarah wal Mirage.

Dates referring to religious holidays vary every year, particularly where Muslim holidays are concerned. Loading and discharging operations as well as bunkering can be carried out during all of above holidays when other services are also available.

TELEPHONES: Available on every berth.

SHORE LEAVE: Allowed.

DEVELOPMENTS: A 4,400 sq.m. shed and two 1,600 sq.m. sheds (South Mole extension) are finished.

Building of 10,000 sq.m. sheds completed for trailers, tractors and elevators of strong capacity for the handling of containers. Berth 9 under reconstruction.

AUTHORITY: Directeur, Port de Commerce de Djibouti.

AGENT: Socopao – Djibouti, P.O. Box 57. Tel. 35.11.50. Telex 827 Djibouti. Cables "Marill".

NOTES

Please also advise Shipping Guides Ltd.

Dominican Republic

GENERAL: All ports.

DOCUMENTS:

Vessels calling at Dominican ports require a complete Dominican consular despatch from every loading port as well as from the last foreign port of call. Should there be no Dominican Consulate at the respective loading port, the Agents should prepare 3 copies of the manifest to be delivered to Customs. If no Dominican Consulate at the last foreign port of call, the Agent will attend to all the formalities required by the local port authorities.

Smallpox vaccination certificates, not over 2 years old, will be required by the Port Doctor as well as the Deratization, resp. Exemption Certificate.

Additional papers, besides consular despatch, required by authorities are as follows:

Port Doctor:
1 copy crew list,
1 copy landing/transit passenger list,

Harbour Master:
Port clearance from last port of call,
3 copies crew list,
3 copies landing/transit passenger list,
3 copies negative passenger list (if none landing),
3 copies arms list,

Customs:
2 copies crew list,
2 copies arms list,
2 copies landing/transit passenger list,
2 copies negative passenger list (if none landing),
2 copies stores list,
1 copy tallybook.

Immigration:
2 copies crew list,
2 copies landing/transit passenger list.

Police:
1 copy crew list,
1 copy landing/transit passenger list.

Department of Agriculture:
1 copy stores list,
1 copy tallybook.

Agency:
1 copy crew list
1 copy landing/transit passenger list,
4 copies manifest (if not airmailed previously),
2 copies each B/L (if not airmailed previously),
7 copies tallybook.

Additional lists, etc., required are:
10 crew lists,
10 landing/transit passenger lists,
5 negative passenger lists (if none landing),
5 arms lists,
3 stores lists,
9 tallybooks,
4 copies cargo manifest (if not previously airmailed),
2 copies B/L (if not previously airmailed).

HOLIDAYS: New Year's Day (January 1st); Our Lady of High Grace (January 21st); Duarte's Day (January 26th); Independence Day (February 27th); Good Friday (Variable); Labour Day (May 1st); Corpus Christi (Variable); Restoration of Independence (August 16th); Our Lady of Mercy (September 25th); Christmas Day (December 25th).

Regular working hours: 0800 — 1200 hrs., 1400 — 1800 hrs., Mondays to Fridays and 0800 — 1200 hrs. Saturdays.

Saturday: Overtime is payable to labour for work performed after 1200 hrs. Pilots and government officials are paid overtime rates all day, but Customs personnel are only paid overtime rates after 1200 hrs.

The above holidays are legal in the Dominican Republic and for the diplomatic and consular representations abroad.

Work can be performed on all Sundays and holidays against payment of overtime to labour, Pilots, Customs and government officials.

TIME: GMT minus 4 hours all year round.

SPARES: Same can be withdrawn same day of arrival via air express. No Customs duties assessed as brought under Customs custody on board vessel. Airwaybill should be addressed to Agent, with clear indication that it covers spares for such and such a vessel.

SECURITY: Stevedores board vessel with special passes issued for vessel in question. Any other visitors must obtain pass from Harbour Master's Office. Nevertheless it is definitely recommended that all cabins be kept locked. This also applies to hatches that are not being worked.

POLLUTION: No garbage, refuse, etc., can be thrown overboard. Vessels liable to heavy fines for oil pollution, etc.

PLAGUE CONTROL: All lines leading to shore must be protected by ratguards. Non-compliance subject to Customs fines.

AZUA (Puerto Viejo): 18.30 N. 70.40 W.

See "General" before first port.

PILOTAGE: Ordered by Agent; vessel should wait for Pilot at a distance of 0.5 mile from the port.

ANCHORAGE: In the approaches, depth is 28 ft.

RESTRICTIONS: Berthing during daylight only.

HEALTH: Pratique is obtained by Agent. In case of infectious illness the whole crew is put in quarantine.

TUGS: Not available.

BERTHING: Finger pier, length 650 ft., width 120 ft. Dredged to 35 ft.

MEDICAL: Necessary for Agent to receive advance notice of required medical attention. Doctor available.

FRESH WATER: Delivered by barge.

FUEL: None available.

GANGWAY/DECK WATCHMEN: Required.

OPENING/CLOSING HATCHES: Carried out by crew.

CUSTOMS ALLOWANCES: No restrictions.

IDENTIFICATION CARDS: Not required.

CONSULS: None.

REPAIRS: No repairs possible.

REPATRIATION: Facilities available.

AIRPORT: Situated 170 miles from port.

POLICE/AMBULANCE/FIRE: Tel. 175.

TELEPHONES: None available on board.

SHORE LEAVE: Allowed.

AUTHORITY: Comandancia de Puerto de Azua RD.

AGENTS: See "Santo Domingo".

BARAHONA: 18.10 N. 71.10 W.

See "General" before first port.

PILOTAGE: Pilot arranged by Agent on basis of Master's advance notice of ETA. Pilot and Agents can be contacted by radio telephone frequency 2738. Pilot boards approximately 1.5 miles outside the port. Pilot also on VHF Channel 16.

ANCHORAGE: Deep water anchorage available outside port. Pilot will advise best location.

RESTRICTIONS: No entry or departure at night.

MAX. SIZE: 575 ft. length; 29 ft. draft.

HEALTH: Pratique granted after Health Authorities have boarded and cleared vessel. In case of disease aboard notify Agents before arrival. Pratique is automatic when proceeding from another port in the same country.

RADIO: When within range, Santo Domingo Radio.

TUGS: One small tug available, ship's lines used.

BERTHING: Sugar molasses wharf, general gypsum wharf.

STEVEDORES: ETAs required 24 and 12 hours before arrival to arrange gangs.

MEDICAL: Medical attention can be arranged after vessel is cleared, preferably ashore. Minor cases are dealt with locally, more serious cases are transported to Santo Domingo.

TANKERS: Discharge at molasses wharf.

DENSITY: Salt water inside harbour.

FRESH WATER: Pipe-line at wharves, ship's hoses used.

FUEL: Small quantities of diesel available by truck from Santo Domingo.

GANGWAY/DECK WATCHMEN: Compulsory gangway watch kept by Customs guards.

OPENING/CLOSING HATCHES: Can be performed by crew or stevedores.

CUSTOMS ALLOWANCES: Bond is sealed, but can be opened at Master's request.

IDENTIFICATION CARDS: Shore passes are provided by Immigration Authorities.

CONSULS: All Consuls at Santo Domingo.

REPAIRS: Minor repairs only.

REPATRIATION: Can be arranged.

AIRPORT: Distance to airport 230 km.

POLICE/FIRE/AMBULANCE: Police, tel. 417; Ambulance, tel. 441; Fire, tel. 348 or 398.

TELEPHONES: Shore telephone alongside ship connected to Sugar Mill.

SHORE LEAVE: Allowed.

GENERAL: No boats to be lowered without official permission. Berthing/unberthing during daylight only.

AUTHORITY: Comandante de Puerto.

AGENTS: See "Santo Domingo".

BOCA CHICA: 18.27 N. 69.35 W.

See "General" before first port.

PILOTAGE: Pilot arranged by Agent on basis of Master's advance notice of ETA. Pilot and Agents can be contacted by radio telephone frequency 2738, and 2638 kHz. Pilot also on VHF Channel 16. Pilot boards 1 mile outside the harbour.

ANCHORAGE: Deep water anchorage available outside port. Pilot will advise best location.

RESTRICTIONS: No entry or departure at night.

MAX. SIZE: 400 ft. length; 25 ft. draft.

HEALTH: Pratique granted after Health Authorities have boarded and cleared vessel. In case of disease aboard notify Agents before arrival. Pratique is automatic when proceeding from another port in the same country.

RADIO: When within range, Santo Domingo Radio.

TUGS: If required, tug is brought from Santo Domingo.

STEVEDORES: ETAs required 24 and 12 hours before arrival to arrange gangs.

MEDICAL: Medical attention can be arranged after vessel is cleared, preferably ashore. Minor cases are dealt with locally, more serious cases are transported to Santo Domingo.
TANKERS: Only small propane gas tankers can be accommodated.
DENSITY: Salt water inside harbour.
FRESH WATER: Pipe-line connection at dock, low pressure, Ship's hoses used.
FUEL: Only available by truck from Santo Domingo.
GANGWAY/DECK WATCHMEN: Compulsory gangway watch kept by Customs guards.
OPENING/CLOSING HATCHES: Can be performed by crew or stevedores.
CUSTOMS ALLOWANCES: Bond is sealed, but can be opened at Master's request.
IDENTIFICATION CARDS: Shore passes are provided by Immigration Authorities.
CONSULS: All Consuls at Santo Domingo.
REPAIRS: Minor repairs only.
REPATRIATION: Can be arranged.
AIRPORT: 6 km. to airport, served by regular airlines with numerous flights daily.
POLICE/FIRE/AMBULANCE: At Santo Domingo.
TELEPHONES: No connection to vessels.
SHORE LEAVE: Allowed.
AUTHORITY: Comandante de Puerto.
AGENTS: See "Santo Domingo".

CABO ROJO: 17.55 N. 71.39 W.

See "General" before first port.
PILOTAGE: Pilot arranged by Agent on basis of Master's advance notice of ETA. Pilot and Agents can be contacted by radio telephone, frequency 2738.
ANCHORAGE: Deep water anchorage available outside port. Pilot will advise best location.
RESTRICTIONS: Entry and departure permitted daylight only.
MAX. SIZE: 600 ft. length; 40 ft. draft.
HEALTH: Pratique granted after Health Authorities have boarded and cleared vessel. In case of disease aboard notify Agents before arrival. Pratique is automatic when proceeding from another port in the same country.
RADIO: When within range, Santo Domingo Radio.
TUGS: No tugs available.
BERTHING: Alcoa Private Wharf, bauxite only. Mechanical loading, no stevedores.
MEDICAL: Medical attention can be arranged by Alcoa after vessel is cleared, preferably ashore. Minor cases are dealt with locally, more serious cases are transported to Santo Domingo.
TANKERS: One tanker at a time could be accommodated.
DENSITY: Salt water inside harbour.
FRESH WATER: Sometimes available.
FUEL: Not available.
GANGWAY/DECK WATCHMEN: Compulsory gangway watch kept by Customs guards.
OPENING/CLOSING HATCHES: Performed by crew.
CUSTOMS ALLOWANCES: Bond is sealed, but can be opened at Master's request.
IDENTIFICATION CARDS: Shore passes are provided by Immigration Authorities.
CONSULS: All Consuls at Santo Domingo.
REPAIRS: Not possible.
REPATRIATION: Can be arranged.
AIRPORT: Distance to airport 360 km.
POLICE/FIRE/AMBULANCE: Contact Port Authority.
TELEPHONES: Telephone on dock connected to Alcoa office.
SHORE LEAVE: Allowed.
GENERAL: No boats to be lowered without official permission.
AUTHORITY: Comandante de Puerto.
AGENTS: See "Santo Domingo".

LA ROMANA: 18.27 N. 69.01 W.

See "General" before first port.
PILOTAGE: Compulsory. Ordered by Agents on receipt of vessel's ETA, 72, 48 and 24 hours before arrival. Pilot launch painted white with grey cabin and with letters "LP-24" painted on sides. Pilot boards 1.5 miles from port entrance. Contact Pilot on 2738 and 2638. Pilot also on VHF Channel 16.
ANCHORAGE: West of Isla Catalina in depths of 15 to 18 fathoms.
RESTRICTIONS: No entry or sailing in hours of darkness.
MAX. SIZE: Length: 580 ft. Draft: arrival 25 ft., sailing 28 ft.
HEALTH: Pratique granted after Health Authorities have boarded and cleared vessel. In case of disease aboard notify Agents before arrival. Pratique is automatic when proceeding from another port in the same country.
RADIO: Santo Domingo Radio, HIX2, frequency 2738 kc/s. Near the port, use Centromana Radio on same frequency.
TUGS: One tug of 620 h.p. available. Extra charge for use of tugs line.
BERTHING: One concrete pier 720 ft. long.
STEVEDORES: To be ordered 4 hours before commencing work.
MEDICAL: Doctors and hospital facilities available. Medical attention can be arranged after vessel is cleared, preferably ashore. Minor cases are dealt with locally, more serious cases are transported to Santo Domingo.
TANKERS: Berth for 1 tanker at the pier. Discharge lines 10 in., 8 in., and 4 in.
DENSITY: 1025.
FRESH WATER: Available from 2 in. pipe-line on pier. Very low rate of supply.
FUEL: Not available.
WATCHMEN: To be provided by vessel. Compulsory gangway watch kept by Customs Guards.
OPENING/CLOSING HATCHES: Generally by ship's crew.
CUSTOMS ALLOWANCES: Seamen may take ashore only 2 packets of cigarettes and no alcohol.
IDENTIFICATION CARDS: Shore passes issued by Immigration Officer.
REPAIRS: Only minor repairs can be effected.
REPATRIATION: Arranged via Santo Domingo.
AIRPORT: Distance 70 km.
POLICE/FIRE/AMBULANCE: Police, 235; Ambulance, 455; Fire, 455.
TELEPHONES: In dock office, ask Sugar Mill for number required.
SHORE LEAVE: Allowed.
AUTHORITY: Comandante de Puerto.

MANZANILLO: 19.43 N. 71.45 W.

See "General" before first port.
PILOTAGE: Compulsory. Pilot comes from Puerto Plata. Boards incoming vessels about 1 mile from the dock. (The Pilot's working hours from 0800 to 1200 hrs., 1400 to 1700 hrs.; a fee charged after working hours. A fee is also charged for movements in harbour.) Ships will be received Saturdays and Sundays and at night for the same rate for the Pilot. Contact Pilot on 2738 and 2638, also on Channel 16 VHF.
ANCHORAGE: Vessels that cannot be docked on arrival will find safe anchorage to the East of the dock where there is plenty of swinging room, in about 20 fathoms of water, with good holding ground of mud and sand.
APPROACHES: Coast Guard Service recommend that a ship, entering Manzanillo Bay from the East, should stay well out until it has rounded shoals surrounding Seven Brothers Islands. At approximately 19° 58′ W. Long. a course of 127° will bring it into the bay near the wharf. A ship arriving from the West should stay about 6 miles off Cape Haitian Light. When abreast the light a course of 111° will lead into the Bay a short distance North of the pier.
RESTRICTIONS: Entry and departure day and night.
RADIO: Radio Station HIL31. This station is private and for the use of Grenada Co. only. Messages of ETA, etc. from vessels should be sent via Miami WAX or New Orleans Radio WNU.

Vessels bound for Manzanillo, should radio their ETA to Santo Domingo Pilot Station daily, from 0600 to 1800 hrs. on frequency 2738 and 2182.

Vessels having single sideband equipment may also contact Radio Instituto Agriario Dominicano at Manzanillo, at wavelength 2670 and 2638 kHz from 0700 to 1200 hrs. and 1400 to 1700 hrs. EST.

TUGS: No heavy duty tugs available but there is a launch for the handling of ship lines. Tug available from Puerto Plata if required due to size of vessel.
BERTHING: Prevailing winds are Easterly and sometimes interfere with docking or undocking. On the East side vessels should dock bow in, since there is not enough room to swing vessels safely around for a port docking. On the West side vessels can dock either side to the pier, depending on the direction and force of the wind. In general banana vessels will be docked on West side of the pier and cargo vessels on the East side. Pier has a concrete deck 744 ft. long, 72 ft. wide. Both sides of the pier are protected with a pine fender system. The water depth at land end of pier is 10 ft. and at the seaward end 40 ft.
MEDICAL: Small dispensary in Manzanillo. Hospital facilities in Monte Cristi, 30 km. away.
STEVEDORES: Available.
FRESH WATER: Available for ships calling at this port only.
FUEL: None available.
GANGWAY/DECK WATCHMEN: Carried out by crew.
OPENING/CLOSING HATCHES: Crew or stevedores.
CUSTOMS ALLOWANCES: Each crew member will be allowed to take ashore one only opened package of cigarettes.
CREW IDENTIFICATION CARDS: Required.
REPAIRS: Small repairs carried out only.
REPATRIATION: Facilities available.
SHORE LEAVE: Members of crew are allowed to go ashore at this port, but Masters should caution them not to take on their persons any dutiable articles, as the Customs will search such men upon landing and should any such articles be found on their persons, this will be treated as an attempt to smuggle; severely punishable offence.
AUTHORITY: Comandante de Puerto.

PALENQUE: 18.12 N. 70.11 W.

SHIPMASTER'S REPORT (1976)

The vessel called at Punta Palenque to discharge a cargo of feedstock from Venezuela. The SBM is located in position 18° 12.2′ N. 70° 11.3′ W. and operated by Refineria Dominicana.

ARRIVAL ADVICE: Agent at last port should telex ETA to Punta Palenque. Unable to establish Radio contact with local coast station.

DOCUMENTS:

7 Crew Lists
2 Store Lists.
1 Crew Effects List.
2 Passenger Lists.
2 Lists of Arms & Ammunition.
2 Lists of Narcotics.
1 Health Declaration.
Clearance last Port.

PILOTAGE: Pilotage is compulsory. Mooring and unmooring 24 hours a day. Pilot boards about 1 mile Southwest of SBM.

Pilot boat, a small tug with black hull and white superstructure, is equipped with VHF Channels 16 & 14, call sign Punta Palenque Pilot. Pilot moors the vessel with the assistance of the Loading Master who gives directions on the focs'le. The tug delivers the mooring gear consisting of 2 nylon tails put on vessel's bits and shackles. The nylon tail will be shackled to SBM mooring lines. These mooring lines consist of about 100 ft. nylon rope and 10 ft. chain. The chain is heaved inboards by means of 1 wire and 1 nylon or polyprop messenger and connected to nylon tails on vessel's bits.

MAX. SIZE: Vessels up to 260 m. in length with max. draft of 14.6 m. A circle of 2000 ft. around the buoy with a min. depth of 50 ft.

HEALTH: Radio Pratique not available.

TUGS: Not available for mooring itself. Messengers to and from SBM are handled by a small work boat.

BERTHING: SBM of standard type with 2 moorings. Two floating hoses attached with 12 in. manifold connection. Hoses are handled by ship's crew under the supervision of the loading master. Maximum discharge pressure 125 lbs/sq. in.

REPAIRS: None available.

GENERAL: No navigational hazards approaching Punta Palenque from the South. SBM shows on radar at a distance of about 11 miles.

Reference: B.A. charts 3689, 471; West Indies Pilot Volume 1, Supplement No. 3 1975.

Weather: Wind: N.E. Trades

Current: Predominating from East to West but sometimes shifting to opposite direction for short periods. Velocity about 1.5 knots.

Services: Fresh water, provisions, fuel oil and diesel oil not available. No medical assistance. Shore leave not permitted, repatriation not possible.

Master's Remarks: When approaching from the South, the coast of Dominican Republic gives a good radar target. SBM could be picked up at about 11 miles distance, however, the red flashing light of SBM is very poor. Punta Palenque Pilot could be contacted at a distance of 30 miles.

Authorities: After vessel is moored Pilot acts as Agent together with a senior Custom Officer who came on board with the Pilot. Two junior Custom Officers will stay on board during the stay in port, also Loading Master and/or his assistant. Pilot delivers outward clearance.

SHIPMASTERS REPORT: (1977)

Documents: Last port clearance.

8 Crew lists.
6 Passenger Lists (nil).
3 Stores lists.
5 Firearms declarations.
1 Vaccination list.

To be legitimised by Dominican Consulate if possible, otherwise notarised by the Chamber of Commerce at sailing port or pay local requirements fee.

Pilotage: Pilotage compulsary. Pilot boards 1 mile S.W. of S.B.M. which is the waiting area. ETA required by Pilot at least 6 hours before arrival. The vessel cannot under any circumstances dock without the Pilot as the Loading Master is stationed on the forecastle head and advises Pilot of helm and engine requirements when approaching S.B.M.

Anchorage: Temporary anchorage on the coastal bank to the West of S.B.M. to suit vessels draft.

Restrictions: A vessel may enter and leave the port during hours of darkness and at any stage of the tide.

Max. Size: Max. length 854 ft. Max. draft 48 ft.

Tugs: 1 tug available, tug attends on arrival and departure bringing to and removing from the vessel all the gear required for mooring (Snotters, Strops,etc.). At night the tug also illuminates the hose string as the buoy light is poor.

Radar: The radar reflector on the S.B.M. is excellent and gives out a good echo at 10 miles.

Berthing: Position of S.B.M. 18° 12′ N., 70° 11.4′ W.

Terminal Operator: Refineria Dominicana De Petroleo S.A. (Refidom SA).

At the time of bething depth of water under the keel by echo sounder was 45 ft., the nature of the bottom at the berth was sand and coral.

As stated above the vessel is able to dock and un-dock at any stage of the tide day or night.

When 1 mile from the S.B.M. (waiting area) vessel approaches the buoy on a N.E. heading parallel to the hose strings and then turns the vessel to stem the current flow.

Moorings: Plaited ropes with cable chafing lengths shackled between the two plaited ropes. Snotters to the bits from the central panama lead.

The port derrick to be rigged in advance to except mooring gear from the tug and lift hoses (2×12″ string).

Hoses: S.B.M. hoses connected to the ships manifold (2×12″). Distance from the S.B.M. to the shore tanks is 1.5 miles. Shore booster pump not available, steam jacket or similar facilities not available. Max. pressure on line 125 p.s.i., max. weight to be lifted 5 tons. Product Handled: Crude Oil. Ships accommodation ladder not required.

Density: 1025.

Services: Fresh water, provision, repairs, airport, surveyors, fuel oil, doctor, hospital, laundry, slop facilities, none of these services are available.

Time: Pilot advises time is GMT minus 4 hours (throughout the year).

General: Vessel's ETA by telex to be given to Santo Domingo from the last port of call, any changes should be passed to the Agent through 'Curacao Radio' as at no time whilst on passage from Punta Cardon could traffic be passed through 'Santo Domingo Radio'. The Pilot acts for Agent, Customs and Immigration (with Port Captain in attendance) leaving with papers, cables and telex, consignees documents etc., after the vessel is all fast. The ship's official documents were not examined. 2 custom guards and the Loading Master remain on board and should be provided with cabins and meals.

The Loading Master accepts the notice of readiness and ullages, specific gravity and temperatures of the cargoes given by ship's staff, he also maintains VHF contact with the Agent in Santo Domingo through the refinery.

The Loading Master, Berthing Master and Sailing Pilot all speak English. VHF contact made with the refinery when 45 miles from the S.B.M. who then passed our amended ETA to the Pilot.

Shore Leave: Not possible.

PUERTO PLATA: 19.49 N. 70.41 W.

See "General" before first port.

PILOTAGE: Pilot arranged by Agent on basis of Master's advance notice of ETA. Pilot and Agents can be contacted by radio telephone, frequency 2738 and 2638. Pilot boards 0.5 miles from port entrance. Pilot also on VHF Channel 16.

ANCHORAGE: Deep water anchorage available outside port. Pilot will advise best location.

RESTRICTIONS: Night entry not recommended.

Depth at entrance 42 ft., depth on bar 37 ft. H.W. and 34 ft. L.W. Depth in harbour 30 ft. to 35 ft.

MAX. SIZE: 500 ft. length, 28 ft. draft.

HEALTH: Pratique granted after Health Authorities have boarded and cleared vessel. In case of disease aboard notify Agents before arrival. Pratique is automatic when proceeding from another port in the same country.

RADIO: When within range Santo Domingo Radio.

TUGS: Tugs available.

BERTHING: One wharf 30 ft. alongside. Pier 496 ft. long, 135 ft. wide. Facilities include water, electricity, cranes, warehouses. New pier recently constructed is 934 ft. long, with depth alongside 35 ft., also 144 ft. wide.

STEVEDORES: ETAs required 24 and 12 hours before arrival to arrange gangs.

MEDICAL: Medical attention can be arranged after vessel is cleared preferably ashore. Minor cases are dealt with locally, more serious cases are transported to Santo Domingo.

TANKERS: Berth at molasses/petroleum berth.

DENSITY: Salt water inside harbour.

FRESH WATER: Pipe-line at wharves. Ship's hoses used.

FUEL: Diesel and fuel oil available by truck from Santo Domingo.

GANGWAY/DECK WATCHMEN: Compulsory gangway watch kept by Customs guards.

OPENING/CLOSING HATCHES: Can be performed by crew or stevedores.

CUSTOMS ALLOWANCES: Bond is sealed, but can be opened at Master's request.

IDENTIFICATION CARDS: Shore passes are provided by Immigration Authorities.

CONSULS: All Consuls at Santo Domingo.

REPAIRS: Minor repairs only.

REPATRIATION: Can be arranged.

AIRPORT: Distance 250 km.

POLICE/FIRE/AMBULANCE: At Santo Domingo.

TELEPHONES: Nearest in Customs House alongside wharves.

SHORE LEAVE: Allowed.

GENERAL: No boats to be lowered without official permission.

AUTHORITY: Comandante de Puerto.

AGENTS: See "Santo Domingo".

RIO HAINA: 18.25 N. 70.01 W.

See "General" before first port.
PILOTAGE: Pilot boards from small boat flying a flag with a white "P" on a black background, about 1.0 mile from harbour entrance. Contact Pilot on 2738 or 2638 and Channel 16 VHF.
RESTRICTIONS: It is recommended to sail during daylight only.
TUGS: 2 tugs, 1,200 h.p. and 850 h.p.
MAX. SIZE: Draft about 29 ft. Length about 600 ft. for sugar berth.
BERTHING: Vessels going to load sugar swing inside the harbour with the aid of a tug, and berth starboard side to the quay. Ship's gangway is recommended. There is sometimes quite a swell running inside the harbour. The port anchor is used for berthing and unberthing.
LOADING: Sugar is loaded by 3 mechanical loaders which are fixed so that large vessels are required to shift along the quay to load in end hatches. Loading rate is quoted as being 350 t.p.h. Cargo quantities are given in short tons.

At least one beam has to be removed from each hatchway to allow loader to enter.

Possible to load 8,500 ton vessel within 24 hours.
SPECIALISED CARGO HANDLING FACILITIES: Roll-on/Roll-off facilities on East bank of river. Container gantry crane available.
FUEL: Fuel oil, diesel and intermediate fuels available from bunker barge.
REPAIRS: Minor repairs in Santo Domingo.
AUTHORITY: Commander of the Port and Collector of Customs.

SAN PEDRO DE MACORIS: 18.30 N. 69.12 W.

See "General" before first port.
PILOTAGE: ETA required 24 hours before arrival. Pilot meets vessels 0.5 mile from buoy. Pilot Radio Station frequency is 2738 and 2638 also VHF Channel 16. In the event of bad weather vessel should remain 3 miles South of the buoy. Pilot boards from small unmarked motor boat.
ANCHORAGE: One mile South of the lighthouse; depth 60 ft.
RESTRICTIONS: Channel depth 30 ft. Up to 350 ft. length, no restrictions. Larger vessels enter in daylight only.
MAX. SIZE: Vessels of 600 ft. length have berthed alongside. Draft up to 26 ft. maximum.

Larger vessels leaving port after loading may require to use port anchor to manoeuvre around sharp bend in buoyed channels just inside harbour entrance.
HEALTH: In case of illness or death on board, send a cable before arrival; doctors available.
RADIO: Radio Station, frequency 2738, call Radio Pilot de San Pedro de Macoris.
TUGS: Compulsory. Tug joins vessels inside the port – 150 ft. from the quay. One tug 500 hp.
BERTHING: Quay No. 1, – 900 ft. long, 25 ft. depth; Quay No. 2, 600 ft. long, 25 ft. depth; Quay No. 3, 600 ft. long 24 ft. depth.

Large vessels arriving to load swing inside the harbour using starboard anchor and berth port side to quay. At a later date barges are placed between the ship and quay, to permit greater draft, and Pilot receives extra payment for doing so. Use of gangway is recommended.
LOADING: Vessels loading sugar use ship's gear and ship has to supply rope slings. The chains on the centre sections of MacGregor hatches are broken, and a gap of about 2 ft. made, through which the bags of sugar are bled into the holds at the rate of about 220 tons per gang per day. Only 6 bags per sling are lifted at a time. Stevedores cover hatch openings with tarpaulins when loading is completed for the day. They will make up any extra slings that are required if ship supplies rope.
TANKERS: Oil line diameter 8 in. Max. pressure 60 p.s.i.
FRESH WATER: Available.
FUEL: Supplied by truck.
GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: Crew.
CUSTOMS ALLOWANCES: Only sufficient for port consumption. Allowed take only 2 open packets cigarettes ashore.
IDENTIFICATION CARDS: Required.
CONSULS: Great Britain Vice-Consul only. Others at Santo Domingo.
REPAIRS: Minor repairs only.
AIRPORT: Airport is located at 40 km. distance.
TELEPHONES: No telephones on board.
REGULATIONS: Rat guards to be fitted on all ropes. No boats to be lowered without official permission.
REPATRIATION: Can be arranged.
SHORE LEAVE: Allowed.
DEVELOPMENTS: Harbour being dredged to 30 ft. alongside the wharves.
AUTHORITY: Comandante de Puerto.

AGENT: See "Santo Domingo".

SANTO DOMINGO 18.28 N. 69.53 W.

(See Plan Book)

See "General" before first port.
PILOTAGE: Pilot arranged by Agent on basis of Master's advance notice of ETA. Pilot and Agents can be contacted by radio telephone, frequency 2738, 2182, and 2638 kHz. Pilot boards 1.5 miles off breakwaters. Pilot also on VHF Channels 12 and 16.
ANCHORAGE: Deep water anchorage available outside port. Pilot will advise best location.
RESTRICTIONS: If draft over 24 ft., Master should advise Agent before arrival. Berthing after dark not advisable for petroleum and grain berths.
MAX. SIZE: Length over 650 ft. inadvisable. Max. draft 29 ft.
HEALTH: Pratique granted after Health Authorities have boarded and cleared vessel. In case of disease aboard notify Agents before arrival. Pratique is automatic when proceeding from another port in the same country.
RADIO: When within range, Santo Domingo Radio.
TUGS: Join vessel inside port. Ship's lines used. 2 tugs available, 1,200 h.p. and 800 h.p.
BERTHING: Daylight berthing only for vessels proceeding to private Tallow/Soda terminal and Cement Wharf.
BRIDGES: Vessels proceeding up river, height limited to 95 ft. above waterline.
STEVEDORES: ETA's required 24 and 12 hours before arrival to arrange gangs.
MEDICAL: Medical attention can be arranged after vessel is cleared, preferably ashore.
TANKERS: One berth, draft 29 ft., at Sans Souci.
DENSITY: Brackish inside harbour. Effect of tide negligible.
FRESH WATER: Pipe-line alongside berths. Ship's hoses used.
FUEL: Fuel and diesel available ex-tanker berth. At other berths by bunker barge.
GANGWAY/DECK WATCHMEN: Compulsory gangway watch kept by Customs guards.
OPENING/CLOSING HATCHES: Performed by crew or stevedores.
CUSTOMS ALLOWANCES: Bond not sealed.
IDENTIFICATION CARDS: Shore passes are provided by Immigration Authorities.
CONSULS: All Consuls at Santo Domingo.
REPAIRS: Minor repairs only.
DRY DOCK: Can accept vessels up to 320 ft. long, 50 ft. beam, 17 ft. draft.
REPATRIATION: Can be arranged.
AIRPORT: Distance, 26 km.; served by regular airlines with numerous flights daily.
POLICE/FIRE/AMBULANCE: Police, San Domingo 682-3000; Ambulance, San Domingo 682-4288; Fire, San Domingo 682-2000.
TELEPHONES: No connection to vessels.
SHORE LEAVE: Allowed.
GENERAL: No boats to be lowered without official permission.
DEVELOPMENTS: Santo Domingo's Sans Souci tourism wharf, phase 1, is now under construction on the Eastern side of Santo Domingo harbour. It is scheduled to be completed by the end of 1977.

Phase 1 of the project comprises the construction of a dock with a platform measuring 250 m. in length by 31.40 m. in width. Totally made out of precast prestressed concrete members, it is designed to accommodate simultaneously two 20,000 metric ton displacement passenger ships or one of 50,000 metric tons. Besides the dock itself, there is a 20,000 sq. ft. passenger terminal building to be built which will be equipped with all the services and facilities necessary to allow cruises to originate in the new port.

Also under construction is a 1,000 metric ton potable water reservoir with a 50,000 G.P.H. pumping station.

The site selected, the Eastern shore of Ozama River, is 15 minutes by car from Santo Domingo's Las Americas International Airport.

The entire harbour will be dredged to a minimum depth of 35 ft. below mean sea level; the dredging work for the tourism wharf is expected to be finished before the end of 1977.

Upon completion the Sans Souci tourism wharf will be exclusively dedicated to tourism traffic.

Phase 2 and Phase 3 consist of berthing facilities for one 20,000 metric ton displacement passenger ship each; construction of these additional berths has not yet been ordered by the Government.
AUTHORITY: Comandante de Puerto.

AGENTS: Baez & Ranik S.A., Edificio La Cumbre, Centro Commercial NACO, Apartado 1221, Santo Domingo. Cables: "Tatem Santodomingord". Telex: ITT 3460364, RCA 326178. Tel. 565-6661.

NOTES

Please also advise Shipping Guides Ltd.

Ecuador

GENERAL

DOCUMENTS: Apart from the usual ships papers the following documents are required by the Port Authorities using Standard ALALC forms.

1 Health Declaration and Annex.
2 Voyage Memorandum.
1 Crew List, with vaccination dates.
6 Crew List.
6 Passenger List (or negative).
6 Passenger List (in transit).
2 Crews Personal Effects.
3 Passenger Baggage.
3 Mail List (or negative).
4 Store List.
3 Cargo Manifest (in transit).
3 Cargo Manifest (for port).
1 Bills of Lading for the Port.

The ship's Agents may also require copies of these forms.

Consular documents must be delivered to the Customs Authorities as follows:–

From each port where cargo was loaded for Ecuador
  Consular Manifest (legalised).
  1 Parcel List, if any (legalised).
  4 envelopes addressed to the Custom's Administrator, the Director General of Customs, The Controller General of the Nation, and the Ministry of Finance.

Notice of Arrival, and intended sailing date must be given to the Port Authorities, via the Agent, at least 3 days prior to arrival.

PRATIQUE: Radio Pratique is not normally granted. Notice of arrival should be given at least 24 hours prior to arrival to Radio Naval Guayaquil, call sign HCG. Listens on 500 kc/s. 8,385 kc/s. 8,320 kc/s. Answers back on 8,472 kc/s. 8,475 kc/s.

The message should read as follows:–

CAPUERTO
MEDICO SANIDAD
ADMINISTRADOR ADUANA followed by name of port
IMMIGRATION

"vapor ...1...…2... procedente ...3... no enfermos abordo, no explosivos no pasajeros para ...4... pasajeros en transito ...5... tons carga para descargar ...6... sacos correo para descargar eta boya ...7... agencia ...8... ...9... Capitan. or in translation (original must be sent in Spanish).

SS ...1... ...2... from ...3... no sick on board, no explosives no passengers for Guayaquil (or name of port) ...4... passengers in transit ...5... tons cargo to discharge ...6... bags of mail to unload ETA sea buoy ...7... agency ...8... ...9... Captain.

1. being name of the vessel.
2. nationality of the vessel.
3. last port and port of call.
4. number of passengers in transit (logically, if there are passengers for the port call, instead of saying (no pasajeros para .. the correct number would be indicated).
5. number of weight tons of cargo for the port.
6. number of bags of mail.
7. estimated hour of arrival at sea buoy, or buoy No. 1 off Data.
8. Agent's name.
9. Master's name.

The same message should be sent to the ship's Agent.

When quoting arrival times use GMT or Ecuadorian Time (GMT minus 5 hours). Summer time is not kept.

The boarding party usually arrives on berthing.

The Vaccination Certificates should be ready in the same order as the Crew Lists.

FLAG: The national flag has yellow, blue and red horizontal stripes. The yellow is twice the width of the others. Government vessels show the national Arms in the centre of the flag.

All foreign vessels will fly the flag from the highest mast.

PILOTAGE: Pilotage is compulsory for all vessels over 500 tons gross. Vessels should await the Pilot off the sea buoy at all ports unless instructed to the contrary. The Pilot must be requested by the Agent at least 12 hours in advance. They are available 24 hours a day, every day of the year.

STEVEDORES: The stevedores are drawn from the 4 respective unions in rota. The foremen are generally selected by the Agent. The same gang will work the ship until completion, working around the clock if necessary. Gangs will start work at virtually any hour.

Opening and closing of ships hatches is undertaken by the stevedores and also the rigging of gear. Even though the stevedores receive payment for rigging anyway, it is advisable to use the ships crew.

Cold Fresh water and lavatories must be made available to the stevedores.

Tally clerks are selected in a smiliar way to the stevedores.

WATCHMEN: 1 or 2 Customs guards will remain on duty, nevertheless the use of watchmen is advised.

GARBAGE: Before docking all vessels should cover all discharge points to prevent material or water being deposited on the quayside. The dumping of any waste is strictly forbidden except in an emergency. No oil may be dumped within 50 miles of the coast, and Ecuador strictly enforces the Anti-Pollution laws.

RAT GUARDS: There must be placed on all mooring lines while the vessel is in port. This rule is strictly enforced.

FIRE DRILL: Periodical fire drills are held. The signal is 6 short blasts. Smoking on dock is prohibited, and cigarettes must not be thrown through port holes.

CREW: Shore leave is permitted except at the Tanker berths. Each man must carry an identity card. It is difficult to sign on a foreign Crew member in Ecuador, unless he has been left behind by another company vessel. A visa is not required for replacements arriving from abroad, but the Crew member must have a passport or seaman's book, together with a letter from the ship operator stating name of vessel to be joined.

In declaring personal effects, all new purchases must be listed, as well as electrical devices, typewriters, sextants, etc.

The master has the right to issue or annul boarding passes if he has the approval of the Port Authority.

As a rule visitors are not allowed entry to the Port Area, although special permits are given to certain vendors. They may come on board solely at the discretion of the Master.

BALAO TERMINAL (ESMERALDAS):
01.02 N. 79.44 W.

OPERATORS: Texaco-Gulf.

LOCATION: Sea terminal berth X (SBM-W) for vessels up to 100,000 d.w.t. is off the mouth of the Esmeraldas River in position Lat. 01° 02′ 03″ N. Long. 79° 42′ 57″ W. and has a minimum depth of 120 ft. at LWS. Berth Y (SBM-E), also for 100,000 d.w.t. vessels, is situated 3.3 miles from the shore and 1 mile distant on true bearing 081°. From berth X in position Lat. 01° 02′ 12″ N. Long. 79° 41′ 51″ W. and has a minimum depth of 120 ft. at LWS.

Berth X (SBM-W): *Lights:* green – blue, flash 1.2 secs., eclipse 6.8 secs., range 5.3 miles, fitted with radar reflector.

Berth Y (SBM-E): *Lights:* green – blue, flash 0.3 secs., eclipse 0.7 secs., range 5.3 miles, fitted with radar reflector.

DOCUMENTS: The following documents are required for the Port Officials who will board any time after arrival, usually during mooring operations.

8 Crew Lists.
6 Passengers List.
4 Cargo Manifest (1 visaed).
2 Bills of Lading.
8 Stores Lists.
6 Copies of List of Personal Effects of Crew.
6 Copies of Voyage Memorandum.
1 Copy of Health Patient Certificate.
2 sets Consular Papers to be obtained at the Ecuadorian Consulate at last port. If no Consul available or by other reason, this matter will be arranged and settled by Ship's Agency in Esmeraldas.

Consular papers may be obtained by the Agents of ship at last port, however they MUST arrive at Esmeraldas no later than 4 days after the vessel has left Balao. Otherwise agency will arrange locally and pay dues in Esmeraldas.

PILOTAGE: Pilotage is compulsory and Masters of vessels are reminded of their obligations to comply with statutory rules and are requested to comply with the following:

1. The Watchkeeping Officer of the ship must be responsible for the boarding and dispatching of the Harbour Pilot.
2. The ladder should be properly secured.
3. The pilot ladder and immediate areas must be adequately illuminated at night.
4. The upper part of the ladder should be safe and secure to enable the Pilot to pass to the ship's deck.
5. The ladder should be in good condition and its treads should remain horizontal throughout the boarding or dispatching.
6. The length of the ladder should not exceed 30 ft. Whenever the distance from sea level to the point of access is more than 30 ft., a combination accommodation ladder/pilot ladder, or other equally safe and convenient unit for boarding or dispatching should be used.
7. The ladder should be rigged in such a manner that each step rests firmly on the ship's side, and spreaders should be placed at intervals of no more than 10 ft. to prevent the ladder twisting.
8. Nylon pilot ladders must not be used.

Pilotage zone: This zone must be considered within the following co-ordinates:

01° 00′ N.
01° 04′ N.
79° 40′ W.
79° 46′ W.

In this zone are included the Pilot boarding, anchoring and mooring areas.

Pilot boarding area: The Pilot boarding area is in a position approximately 1.5 miles N.W. of berth Y (SBM-E) between the parallels of 1° 04′ and 1° 03′ N. and meridians of 79° 40′ W. and 79° 43′ W.

ANCHORAGE: Vessels required to anchor on arrival will anchor in a position approx. 1.5 miles S.W. of the berth X (SBM-W) in an area between the parallel of 1° 02′ N. and 1° 00′ 30″ N. and the meridians 79° 44′ W. and 79° 46′ W.

RADIO: Vessels bound for Balao must advise their ETA to Superintendencia Naval, Esmeraldas, 72 hours and 24 hours before arrival. Message must contain vessel's name, ETA, Master's name. A 24 hour watch is maintained on HF-SSB-2182 – 2136.3 kHz call frequency, and 4139-6210 kHz working frequency and VHF Channel 16. Vessels are usually able to make contact on this channel at a distance of 20-30 miles on the seaward side of the berth operation. Channel 14 will be used for contact between ships and the Superintendencia Naval before the port arrival. Channel 12 is used for internal traffic, loading, unloading and ships berthing operations.

TUGS: 3 line boats available, 560 h.p. each.

BERTHING: The mooring area is situated between the parallels of 01° 03′ N. and 01° 00′ N. and the meridian 79° 40′ W. and 79° 44′ W. Mooring operation will be undertaken by day under normal weather conditions (0500 – 1700 hrs.). Unmooring operation will be undertaken by day and night without restrictions.

In this area the traffic of small craft such as fishing vessels, coasting vessels engaged in cabotage is absolutely prohibited with the sole exception of small craft used in the reception and mooring of tankers.

Mooring Turn (Arrival): Arrival time is considered the time the vessel reaches the anchorage vicinities or the time the Pilot boards the vessel, whichever occurs first. In any case, the Terminal will give priority to the ship that arrived first.

Mooring information: When a vessel is within reasonable distance of the buoy, two ship's lines will be carried by the mooring tug to the floating buoy lines and secured to same. These lines will then be heaved aboard. As the buoy ropes come clear of the water, it will be noted that chains are attached to them. These chains are to be secured to the bitts in such a manner that the nylon is outside of the external length of the ship so the chains absorb any chafing if the buoy lines cross the bow. There are two buoy lines. Power must be available at all times on all deck winches and windlass while the vessel is at the berth.

A mooring line must be available aft, secured to the bitt and of sufficient length to enable a tug boat to pick up the eye and tow off if necessary.

Unmooring: The Mooring Master will advise to Texaco Control the estimated time for the completion of loading and will ask for Official Pilot. Then, hose disconnecting operation is undertaken aboard ship. After the unmooring takes place, the tug boat comes alongside the ship to transfer all material and personnel that have been used during the operation. Then the vessel will be ready to leave the Terminal after receiving the respective documents.

Average Operation Time: Subject to different characteristics of each ship, it can be considered as reference, the following rates:

(a) Approaching the SBM from Anchor Area, 50 minutes or	
(b) Approaching the SBM from Pilot Boarding Area	30 minutes
(c) Putting mooring and connection equipment aboard ship	30 minutes
(d) Mooring	30 minutes
(e) Hose lifting and hose connection	80 minutes
(f) Hose disconnecting	40 minutes
(g) Unmooring	10 minutes
(h) Removal of Personnel and Equipment	25 minutes
(i) Maximum flow rate	4,200 t.p.h.

HOSE HANDLING: *Buoys "X" and "Y".* Lifting, connecting, disconnecting, lowering and other operations will be performed by a special team from shore under the Loading Master's orders with assistance of the ship's deck Officer. Port derrick must be rigged and ready for use on arrival and vessels should be warned that the weight of each hose is at least of 5 tons under favourable conditions. Members of the ship's crew will be required to operate the winch or winches.

Particular care should be taken during the hose handling operation in order to avoid serious damage to the hoses, the plastic floats and buoys on the plate edges, rails, etc.

LOADING: Loading is through SBMs which are 49.5 ft. in diameter and held, each one in position by fixed chains secured to piles sunk into the sea bed. Buoy X is equipped with 810 ft. length and 24-inch self-float loading hose which is manifolded to two 105 ft. length and 12 in. tail hoses. Buoy Y is equipped with a 20 in. self-float loading hose manifolded to two 12 in. tail hoses. Each buoy is equipped with a 810 ft. length and 20 in. floating string reduced to 12 in. tail hoses for deballasting. Standard loading rate is about 30,000 b.p.h.

Potential Loading Rate:
Berth X 38,000 b.p.h.
Berth Y 36,000 b.p.h.
Max. Pressure allowed· 225 p.s.i.
Booster pump: none.

DEBALLASTING: The load on top system is accepted at this terminal and vessels are requested to arrive with slop tanks "settled out" as far as possible. At the present time the terminal is not able to handle slops and until such time as the terminal is able to receive slops, shore discharge is prohibited.

All clean ballast must be pumped ashore, with the exception of vessels especially equipped with clean segregated systems – which are reserved for ballast only. Vessels so equipped will be permitted to pump segregated ballast overboard after being accepted and approved by shore inspectors.

For the water processing of ballasted tankers, the Balao Terminal has an adequate system that starts in the hoses of the buoys and passes through a submarine pipe going to a preseparator, where it hits and separates: first the water of the hydrocarbons, then goes to a decantation pool, where it stays 48 hours and after goes to a final separator in which are collected the last traces of hydrocarbons and finally the clean water is drained to the sea.

Vessels going to Balao to load crude oil must arrive with sufficient ballast for safe manoeuvring, that is, should be 25 to 30% of the capacity of the ship (Deadweight tonnage) and 10 ft. trim or less.

After the ballast tanks have been inspected and found satisfactory, deballasting will commence on the advice of the Company representative. When the ballast has been discharged, the tanks will again be inspected and if ready for cargo, a Dry Certificate will be signed by the Company representative. In any case cargo will be loaded when both ship and shore are ready to commence operations.

Under no circumstances will the vessel be expected to load at a faster rate than that requested by the Master. It is the ship's responsibility to check that the requested loading rate is not being exceeded. The Company for their part, will make every effort to maintain the requested rate and will advise of any alteration in the loading rate immediately.

POLLUTION: The Ecuadorian Government have very strong views on pollution and vessels are warned that a very careful watch is kept at all times to ensure that pollution does not take place – or that if pollution does occur it is controlled as quickly as possible. Masters are advised that it is against the law to pollute the waters and coast of this Country and severe penalties are imposed for such offences.

During the hours of darkness it is requested that searchlights from bridge wings and approved floodlights are used to illuminate surrounding waters to facilitate detection of oil and assist generally in loading operations. Vessels are advised that failure to supply sufficient lighting could result in cargo operations not being allowed during the hours of darkness. Such delays would be for vessel's account.

SHIP'S OBLIGATIONS IN PORT:

(a) It is the obligation of the ship's Master or his representative to receive the official Pilot at the gangway and provide him with all information required.

(b) Ship's Master must delegate the First Officer or any other responsible officer as his representative for receiving Official Authorities at the gangway and provide them with documents and information while remaining on board.

(c) Ship's Master is obliged to present to the Superintendencia Balao Insurance Certificate against pollution issued by Tovalop, Ship's Register and all ship's documents that might be required.

(d) Accommodation and meals must be provided for Ecuadorian Guard personnel, such as naval personnel and others as required.

(e) Accommodation and meals must be provided for the Mooring Master on duty.

(f) Meals must be provided for official Pilots if they are on board at meal times.

(g) Facilities and personal assistance must be provided for Government officials representing the Natural Resources Ministry who will board the vessel to perform tank inspections and loading control.

WEATHER AND CURRENT: Wind and swell are mostly from S.W. direction. During the wet season (December to May approximately) wind and current are from a N.E. direction. The currents vary frequently, sometimes reverse direction from the wind causing the vessel to yaw heavily at the berth. Nevertheless, in general, the weather the whole year is good. Sometimes, however, during the dry season (June-November) mooring operations are limited to wind intensity.

DENSITY: 1025.

FRESH WATER: Available but limited.

MEDICAL: Hospital and clinic available, but limited.

FUEL: Not available.

TIME: GMT – minus 5 hours throughout the year.

PROVISIONS: Available.

REPAIRS: No facilities of any kind are available at this port.

DIRTY BALLAST: Ballast facilities are available except slops.

REPATRIATION: Only if the person concerned holds the necessary valid certificates and documents. For crew joining make Quito the disembarking airport.

CONSULS: Colombia, all other consuls in Quito.

SHORE LEAVE: Possible, two radio-equipped launches provide service day and night.

DEVELOPMENTS: *Esmeraldas:*
The first stage of the new port now under construction will have 2 general cargo berths, a service wharf and a floating berth for local traffic. The master plan provides for expansion of the port to 5 general cargo berths, a container berth and a roll-on/roll-off berth.

At present, the traffic (mostly banana exports) through Esmeraldas is handles by lighters working to ships moored in the Rio Esmeraldas.

GENERAL INFORMATION: Yagua Shipping Agency has its installations on the Oceanfront side of Esmeraldas, Ecuador, and dedicated exclusively to attend to handling and protecting Agents on behalf of Owners, Charterers and Operators for crude oil tankers arriving at this port. They are also Agents of Texaco-Gulf consortium for their individual and chartered vessels as well as handling of documents and export policy of every particular crude shipment.

They are also attending the vessels which carry shipments of the Ecuadorian Government on behalf of the Operators.

AGENTS: *Main Office:* Yagua Ltd., Shipping Agency, P.O. Box No. 69, Quito, Ecuador. Rodriguez Soto No. 112 y 18 de Septiembre, Quito, (Ecuador). Cable: Yagua Quito (Ecuador). Telex: Yagua Quito 3530047 (Monday through Friday. See Esmeraldas Inf. for Saturdays and Sundays). Telephones: 524816 – 521706 – 529133.

Operations Office: Avenida Kennedy 509, Las Palmas. Cable: Yagua Esmeraldas (Ecuador). Telephone: 711-670 (available 24 hours a day).

Also on VHF Channels 16, 6, 12 and 71.

GUAYAQUIL: 02.12 S. 79.52 W.

DOCUMENTS:

Port Doctor:

Derat Certificate.

Maritime Declaration of Health.

Crew Roll with dates of vaccination against smallpox for each member.

Same for each passenger.

Passenger List.

Passenger List in Transit.

Harbour Master's Office:

Voyage Report.

Clearance from last port.

Crew Roll with original visa from Ecuador Consul in first port of voyage (3 copies).

Passenger List with original visa from Ecuador Consul in embarking port, or declaration that they have no visa, signed by Captain (2 copies).

Passenger List in transit signed by Captain or declaration that they have no passengers in transit (2 copies).

Provisions List, Stock and Medicines on ship (3 copies).

Cargo Manifest in transit (1 copy).

Combustible or inflammable Cargo (1 copy).

Customs:

8 copies of Manifest.

Sealed envelope of Manifests, consular and commercial invoices and non negotiable vouchers.

Cargo index and copy of Cargo Manifest in direct transit (8 copies).

A Register (8 copies) of spare parts for vessel and provisions.

Crew Roll and detailed list (8 copies) of personal belongings of officers and crew.

Passenger List, with indication of their suitcases and list of suitcases that travel without their owners; in this case should be specified the port where they were put on board and personal declaration of each passenger (8 copies).

If the vessel with ballast, Master will be obliged to produce (besides the ballast certificate) documents already mentioned in each respect. Master or Maritime Agency will produce a written statement to Customs within 12 hours from arrival of vessel whether they decide to take any cargo for exporting. If not loading vessel must leave within the following 24 hours.

Immigration:

Crew List signed by Master.

Passenger List of those who disembark there or a declaration of none for this port, signed by Master.

Passenger List in transit, or a negative declaration signed by Master.

In case of having passengers to disembark in this port, Master should produce passports and visas.

Crew identification cards or similar documents.

Inspection of ship by Authorities will be done (compulsory) within 3 hours of arrival, usually as soon as ship berths, or in quarantine.

PILOTAGE: Vessels approaching port to notify their arrival by Naval Radio Station HCG, 24-hour service, frequency 8476 kc/s. and 500 kc/s. Traffic list broadcast every hour on 8476 kc/s.

Advance notice of not less than 12 hours required, addressed to Capuerto Aportuaria Agencia in either English or Spanish with the following details: date, and time of ETA, destination (whether Buoy No. 1 or Puna), maximum draft, cargo details, details of passengers or mail, and if Pilot required.

Pilot Station for Puerto Maritime: Situated in position 02° 43′ 18″ S. 80° 17′ 30″ W. Pilot boat needs 1 hour to go from Pilot station to Buoy No. 1. Contact by VHF Channel 16, 24-hour service. Pilot boat is wooden, 45 ft. long, black hull, white cabin, with letter "P" on sides. During day carries blue flag with letter "P" and by night has regulation pilot lights.

Pilot Station for River Guayas: Situated in village of Puna. Pilot boat requires a minimum of 30 minutes to move from Pilot station to vessel. Vessels requiring Pilot signal Morse letter "X" by lamp or sound.

Pilot boat has grey iron hull, white cabin with Lancha de Practicos written on both sides. By day carries blue flag with letter "P". By night regulation pilot lights.

ANCHORAGES: *Puerto Maritime:* 1 mile South and 2 miles West of sea buoy in position 2° 44′ 26″ S. 80° 24′ 44″ W. Min. depth in the area is 35 ft.

Guayas River: Inside area between bearings 180° and 135° from the lighthouse of Punta Mandinga at Puna, 1 mile from the lighthouse.

MAX. SIZE: Max. length for ships entering Puerto Maritime is 650 ft., with a max. draft of 33 ft. Vessels of deepest draft should begin to enter 1 hour before high tide. For Guayas River max. length 600 ft. max. draft 23 ft. 6 in.

HEALTH: Procedure to obtain free pratique is to produce health certificates to port doctor upon arrival. To get free pratique by radio, ship must radio to port doctor any changes in health situation on board since leaving last port.

TUGS: Normally join vessel beyond Buoy No. 80. Tugs are compulsory, also use of their lines is compulsory. Cost of both services is included in total cost of port duties.

BRIDGES: No bridges that restrict traffic either in Estero Salado nor in Guayas River, but ships that are to berth in village of Eloy Alfaro (Duran) should take into consideration height of telephone lines between Guayaquil and El Islote, min. height 48 ft.

STEVEDORES: Radio message to ship's Agent will give agency enough data to make all arrangements required for operations of loading/discharging. In Maritime Terminal an average discharge/loading rate of 25 metric t.p.h. per hook.

MEDICAL: If ship requires medical attention, a notice of 12 hours should be given to Agents. Guayaquil Hospital and clinics are available. Vaccination supplied by Health Authorities against smallpox.

TANKERS: Discharge asphalt in Guayas River at a special quay, max. draft 23 ft. 6 in. Discharge of petrol for aviation in Puerto Maritime is to lighters, max. draft permitted is 33 ft.

DENSITY: 1012.

FRESH WATER: Available. Three pipes at each berth delivering at a rate of about 20 metric t.p.h. each.

FUEL: None available.

GANGWAY/DECK WATCHMEN: Capitania del Puerto provides members of the Policia Maritima. Ships should supply watchmen with food.

OPENING/CLOSING HATCHES: Carried out by crew.

CERTIFICATES: All ship's certificates required.

CUSTOMS ALLOWANCE: Each member of crew allowed 600 cigarettes. Each Crew member or passenger allowed 1 litre of wine and 1 litre of spirits.

IDENTIFICATION CARDS: Not required.

CONSULS:

Western Germany
Argentina
Belgium
Bolivia
Brazil
Great Britain
Columbia
Costa Rica
Chile
Nationalist China
Denmark
Dominican Republic
Salvador
Spain
U.S.A.
Philippine Republic
Finland
France
Greece

Guatemala
Haiti
Netherlands
Honduras
Israel
Italy
Japan
Lebanon
Mexico
Nicaragua
Norway
Panama
Paraguay
Peru
Portugal
Sweden
Uruguay
Venezuela

REPAIRS: All types of deck and engine repairs are possible.

DRY DOCKS: Dry dock with capacity of 3,600 metric tons.

REPATRIATION: Facilities for effecting crew changes and arranging any necessary repatriation.

AIRPORT: Airport is 8 miles from Maritime Terminal and has scheduled flights to everywhere.

TIME: Local time is GMT minus 5 hours. There are no alterations during year.

HOLIDAYS: 1st January; Good Friday, 1st and 24th May; 24th and 25th July; 10th August; 9th and 12th October; 2nd and 3rd November; 25th December. But only on the 1st January and 25th December is there no working in port.

POLICE/AMBULANCE/FIRE: For any of these services call 211 (interno del Puerto).

TELEPHONES: Arrangements for placing telephone on board ships on request.

SHORE LEAVE: Allowed.

PURSER'S REPORT: (March 1975)

The government have now issued their own set of papers. These must be made out is sets of seven (7) ie:— Seven Crew Lists. Seven Passenger Lists, Seven Crew Customs Declaration Forms, Seven Cargo Manifests, Seven Dangerous Cargo Manifests (if carried), Seven Lists of Mail (if none – nil returns on sheet), Seven General Declarations. One (1) Maritime Health Form. Seven Stores List.

All Forms should be certified by Ecuadorian consul or friendly Nation at Port of departure.

AUTHORITY: Capitan del Puerto de Guayaquil, Puerto Maritimo.

LA LIBERTAD: 02.12 S. 80.55 W. (See Plan Book)

DOCUMENTS: Port clearance is effected at La Libertad.

The following papers must be ready for presentation to the authorities on arrival:

1 Bill of Health signed by the Master and visaed by the Ecuadorian Consul at port of departure.

1 Ballast Certificate visaed by Ecuadorian Consul at port of departure.

6 copies of Cargo Manifest (if any cargo for the port).

6 copies Bills of Lading.

9 Crew Lists (original visaed by Ecuadorian Consul at port of departure).
9 Passenger Lists for the port (if no passengers state "without passengers"). If applicable, the list should show names, sex, age, nationality, port of embarkation, occupation and whether married or single. Passengers must make a declaration of their luggage on Ecuadorian Form No. 94.
9 Stores Lists.
5 Lists of Crew's personal effects (new articles only).
4 Lists of unaccompanied baggage (if none, state "without them").
4 Lists of Encomiendas (list of small private parcels to be landed in Ecuador – if none, state "without them").
4 Lists of Mail (if none, state "without them").

If there is no Ecuadorian Consul at the port of departure, the documents must be visaed by the Consul of a friendly nation.

PILOTAGE: Compulsory. Pilots boarding in position 2° 08′ S. – 2° 10′ S. and 80° 55′ W. – 80° 56′ W. ETA should be given to port 12 hours before arrival. Open roadstead.

ANCHORAGE: No limitations except depth 36 ft.

Vessels proceeding to oil terminal should anchor about 1 mile N.N.E. of the mooring buoys (which are about 15,000 ft. off-shore) where the Port Authorities and Mooring Master board. The anchorage is an open roadstead with sandy bottom.

RESTRICTIONS: *Tankers:* Daylight berthing only.

MAX. SIZE: *Tankers* – LOA 650 ft.
Beam 84 ft.
Loaded draft 34 ft. 6 in. max.
Depth MLWS at mooring is 43 ft.

HEALTH: Vessels arriving from foreign ports should fly appropriate International Code signals to advise state of health and request free pratique. Vessels put in quarantine required to fly signal QL all the time they are in port until Port Health Authority advises to the contrary.

RADIO: ETA messages may be sent by radio to Radio Naval, HCG Guayaquil Radio, 8476 kc/s., 500 kc/s. Radio Naval would then repeat the message to the Naval Station in Salinas, or to the Telegraph Office. Radio Naval has VHF/RT and Telex.

TUGS: Only tankers require tugs to berth at the buoys. Other vessels work cargo at anchor.

BERTHING: No wharves for large vessels, only for coasters.

STEVEDORES: Arranged by Agent; separate ETA not required.

MEDICAL: If urgent medical attention required, Master should radio details in advance. All facilities available.

TANKERS: The Anglo-Ecuadorian Oil Fields Terminal is located in Santa Elena Bay. Four small marker buoys indicate the seaward end of the submarine pipe-line. An Easterly current usually prevails, rate being from 0.5 to 1.5 knots. There is one 14 in. submarine pipe-line fitted with two 10 in. flexible hoses for connecting to ship. Max. loading rate is about 450 t.p.h, and max. pressure is about 150 p.s.i.

Mooring Master assists in berthing vessels. Vessels are moored port side to, using starboard anchor off the starboard bow and mooring buoys for lines to the port bow and astern. Vessels moored during daylight hours only; however, they may unmoor at any hour of the day or night. Recommended that at least 1 tank of clean ballast be retained on board vessels until mooring has been completed. Ballast will then be pumped overboard. Vessels should be equipped with three 9.5 in. or 10 in. (circ.) – 200 fathom hawsers for use in mooring to and 7 rope stoppers each at least 3 fathoms long. The following signals are used in connection with the loading of cargo.

By day: Start loading 2 long blasts of vessel's whistle or siren, 1 red flag hoisted; stop loading 4 long blasts of vessel's whistle or siren, flag hauled down.

By night: Start loading, 2 long blasts of vessel's whistle or siren, 1 red light hoisted; stop loading, 4 long blasts of vessel's whistle or siren, 1 red light hauled down.

To summon the launch, 3 long blasts are to be blown on the vessel's whistle.

DENSITY: 1028

FRESH WATER: Not available.

FUEL: Bunkers available, but have to be requested 72 hours prior to arrival in order to make transport arrangements.

CONSULS: There is no consular representation of any country at La Libertad. The nearest are at Guayaquil and include the U.K., U.S.A., Norway, Sweden, Denmark, Greece and Panama.

GANGWAY/DECK WATCHMEN: Available, but not compulsory.

OPENING/CLOSING HATCHES: Can be done by the crew or stevedores.

CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle wine/spirits per man.

IDENTIFICATION CARDS: Required.

REPAIRS: Anglo-Ecuadorian Oil Fields Company can effect small repairs.

REPATRIATION: Can be effected from port of Guayaquil.

AIRPORT: At Guayaquil, 130 km. away, served by regular airlines.

TIME: GMT minus 5 hours.

HOLIDAYS: January 1st; Carnival; Good Thursday; Good Friday; May 1st; May 24th; July 24th; August 10th; October 9th; October 12th; November 2nd; November 3rd; December 25th.

TELEPHONES: No connections to vessels possible, except at tanker moorings which is direct to loading installation only.

SHORE LEAVE: Permitted.

GENERAL: Dirty ballast or slops not admissible at La Libertad.

AUTHORITY: Terminal Superintendence La Libertad.

MANTA: 00.56 S. 80.43 W. (See Plan Book)

DOCUMENTS:

A. List of documents, 2 copies (Port Authority 1, the latter will sign a copy for Purser).
B. Sailing Permit from last port. 1 copy for Port Authority representative, who will copy the permit and give original to Captain of Port.
C. General Declaration, 5 copies – Health Department 1, Captain of Port 1, Immigration 1, Custom House 1, and Port Authority 1. The document will contain (see Note No. 4 below):
    1. General data on ship, voyage, cargo and passengers.
    2. Health Declaration.
    3. Stores Declaration.
    4. Under remarks – any pertinent item.

    Should be signed by Master and ship's Doctor or, if no doctor aboard, by Purser. For further details, see Note No. 3 at end of this Article.
D. List of passengers destination Manta, including list of their baggage, 4 copies – Customs 1, Immigration 2, Port Authority 1.
E. List of Passengers in transit, 3 copies – Immigration 2, Port Authority 1.
F. Crew List (including and indicating any members leaving vessel at Manta), 4 copies – Customs 1, Immigration 1, Captain of Port 1, Port Authority 1.
G. Manifest of Cargo for discharge at Manta including transhipment 4 copies – Customs original and copy, Port Authority 2.
H. Unaccompanied Baggage List including baggage for any member of the crew, who may disembark, 3 copies – Customs 2, Port Authority 1.
I. Mail Manifest, 2 copies – Post Office 1, Port Authority 1.
J. Checking Books, 5 copies, plus one copy for each point of possible discharge of cargo from vessels for Port Authority.
K. Bills of Lading, 1 complete set for Port Authority.
L. List of vessel supplies including liquors, cigars, cigarettes, other tobacco products, matches, lighters, clothes, novelties, and provisions will be maintained in Purser's office for review by Custom House.
M. Tissue Manifest, hatch list and cargo plan. 1 copy of each for Port Authority prior to arrival of vessels. These papers to be sent by air mail as per regulations.
N. Ballast Certificates will be used instead of manifests when vessels do not carry any cargo.
O. General Manifest. This manifest will include all cargo loaded during voyage which will include all cargo in transit – 1 copy. General manifest will be maintained in Purser's office for review by Custom House, and be accessible for customs at all times.

Note No. 1: All papers (items A to K) will be delivered to representative of Port Authority who will check them against list of documents to be receipted for Purser. Port Authority will subsequently distribute documents to interested parties as indicated above.

Note No. 2: Port Authority reserves the right to refuse berthing facilities until all documents received. Of course, this authority will be handled with discretion to avoid unnecessary or unwarranted delay to vessels, passengers, and cargo.

Note No. 3: All ship's papers will be filed in Port Authority office, and authorities noted herein are welcome to inspect them whenever they wish to do so.

Note No. 4: General Declaration should contain the following:

A. Name of vessel, length and registered tonnage.
B. Owners.
C. Voyage number and ports of call on voyage.
D. Total number of passengers aboard.
E. Total tonnage (of 1,000 kilos) of cargo aboard.
F. Total number of passengers for Manta.
G. Total tonnage (of 1,000 kilos) of cargo for Manta.
H. Health Declaration.
I. Stores Declaration that ship's consumable foodstuffs and consumable supplies are under lock and key; that the slop chest, bazaar, and store-rooms containing liquors, cigars, cigarettes, other tobaccos, matches, lighters, clothes, novelties, sports material, toilet articles, cosmetics, medicines, etc. have been locked and sealed with metallic non re-usable seals with . . . . serial numbers. The seals are identifiable by their non-repeat numbers.

    All vessels should have these seals aboard and should equip doors and door frames with suitable secure hardware through which seals can be passed. (Model of the form for the above document may be obtained from the Port Authority).

Note No. 5: Baggage listed as cargo should not also be listed as baggage or vice versa.

PILOTAGE: Compulsory. Pilot boat by day will show blue flag at mast head; by night red light 2 ft. 6 in. below mast head light, both visible around the horizon.

Pilot will board at point located at distance of half a mile, 045 degrees from Manta lighthouse (Lat. 00° 56′ 20″ S. Long. 80° 43′ 02″ W.). He will immediately proceed to conduct ship to inner harbour and dock at assigned pier or anchor in assigned anchorage.

Vessels will not have to anchor, but will reduce speed to steerageway and stop propeller. Lower Jacob's ladder so Pilot may board safely. Pilot will act as Representative of Port Authority. Other officials and Representative of steamship Agency will embark once ship has tied up.

Pilotage compulsory for all foreign vessels over 500 tons, with following exceptions:

(1) Fishing craft, yachts, tugs, barges and other craft of less than 500 tons total displacement whose handlers are suitably licensed by Captain of the Port of Manta.

(2) Vessels of the Ecuadorian Navy.

Note: Masters of large vessels and handlers of small craft who do not follow all rules of safety, including Rules of the Road may lose their right to navigate within jurisdiction of the Port Authority and may be subject to additional sanctions.

ANCHORAGES: Free anchorage area located around a point 1 mile from Manta lighthouse (Lat. 00° 56′ 03″ S., Long. 80° 43′ 01″ W.). Depth 45 ft. Anchorage inside breakwater will be assigned by Pilot.

RESTRICTIONS: No restrictions upon entry. Vessels up to 32 ft. draft may enter at any time of day or night.

MAX. SIZE: Max. permissible length 600 ft.; breadth 60 ft. draft 32 ft.

HEALTH: Radio pratique granted all ships in accordance with International Sanitary Regulations. Health documents will be delivered to boarding officer of Port Authority. When pratique granted by radio, not necessary for port doctor to board vessel.

In request by radio for pratique, vessels should give following data 12 to 24 hours before arrival.

A. Date and hour of expected arrival.
B. Number of Ecuadorian passengers.
C. Number of alien passengers.
D. Statement regarding existence or non-existence of communicable diseases aboard.

RADIO: Manta HCM 8372 kc/s. Radio telephone 2182 kc/s. VHF Channels 5, 6, 12, 16, 24, 25 and 26.

TUGS: A 1,200 h.p. tug, joins vessel in vicinity of pier. Ship's lines usually used. Use of tug for docking and undocking is at discretion of Port Authority.

BERTHING: Berth will be assigned by Pilot at boarding time.

Berthing facilities:

2 Piers Length 200 m. for vessels with draft up to 10 m. Roll-on/Roll-off facility at one pier.

Marginal Quay, length 150 m., for vessels with draft up to 7.5 m.
Marginal Quay, length 150 m., for vessels with draft up to 5.7 m.
Marginal Quay, length 150 m., for vessels with draft up to 3.8 m.

Cranes: Mobiles cranes with capacity 12–35 tons.

STEVEDORES: Arrangement for stevedores made by ship's Agent prior arrival.

FRESH WATER: Fresh water available in small quantities.

FUEL: Diesel oil available in small quantities by truck.

FIRE PRECAUTIONS: Regular fire precautions should be taken by all ships. Smoking should be prohibited in any section of the ship used for cargo. No smoking on the weather deck, cargo decks, and the ship's holds, whether cargo being worked or not. Smoking around hatches or at cargo winches must be prevented.

Smoking should be restricted to the passenger section of vessels, and to officers' and crew's quarters where suitable receptacles are available.

Persons including officials can be fined or refused entrance to terminal at discretion of Port Authority for careless or intentional disregard of reasonable fire prevention precautions.

Port Authority reserves right to inspect cargo working sections of vessel, to check precautions against fire, and to determine whether there are any undue accumulations of combustible materials.

Pumps and other fire fighting equipment aboard should be maintained in a state of readiness as long as vessels are in the terminal.

DEVELOPMENTS: Open storage area of 10,000 sq.m. will be available near berths in February 1979.

GANGWAY/DECK WATCHMEN: Custom police keep watch at the gangway.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CUSTOMS ALLOWANCES: Tobacco, small amounts for personal use while in port. Wine and/or Spirits, wines and liquors by the glass for consumption on board while in port.

CARGO GEAR: Ship should have cargo nets, but Port Authority can provide cargo nets at extra cost.

IDENTIFICATION CARDS: Crew members should have identification cards while ashore at all times.

CONSULS:

Germany: Mr. Jorge Appenzauser, Tel. 611-169.
Colombia: Dr. Anibal Ramirez Angel, Tel 610-989.–Malecon.
Chile: Mr. Marino Concha Richards, Manuel J. Calle 200, Tel. 610-151.
Panama: Dagoberto Santana. Morona.
Italy: Romulo Massari P. P.O. Box 4847. Tel. 610-395.

REPAIRS: No repair facilities available.

REPATRIATION: Repatriation of crew members through Port of Guayaquil.

AIRPORT: Airport with 2,500 m. runway. Flights to Quito at 10.50 hrs. on Monday, Wednesday, Friday. From Portoviejo (36 kms.) flights to Quito on Tuesday, Thursday, and Saturday. Air taxis on request.

TIME: Local time GMT minus 5 hours.

HOLIDAYS: No movement of cargo within the terminal on 1st May, Christmas Day, or after 2000 hrs. on the 31st December, or on New Year's Day.

POLICE/AMBULANCE/FIRE: Police 610-900; Ambulance 612-014; Fire 610-100.

TELEPHONES: Telephone service can be obtained at Terminal Office, at same rate as public telephones.

SHORE LEAVE: Crew members are welcome ashore.

AUTHORITY: Autoridad Portuaria de Manta.

PUERTO BOLIVAR: 03.14 S. 80.01 W.

DOCUMENTS:

3 Voyage Memorandums.
2 Maritime Health Declarations.
1 Consular Despatch.
1 Port of Origin Certificate.
10 Crew Lists.
8 Stores Lists.
3 Individual Declaration List for each member of the crew.
8 Lists Passengers Disembarking at this port.
8 Lists Passengers in transit.
4 Luggage, Mail and Commissions Lists.
4 Manifest of Cargo Lists.

Documents for Port's Authority should be supplied by Agents:.

1. General Cargo Manifest in complete sets (Importation in triplicate, Exportation one set).
2. Bill of Lading, complete sets: Importation (one set), Exportation (one set) at time of sailing.
3. Export Customs House Clearance Document (one set). This document is replaced by the Bill of Lading.
4. Certificate of Ballasting.
5. Request for Mooring Berth.
6. Stevedore's cargo plan per hatch.
7. Muster-roll of cargo.
8. Tally books: 15 copies in Spanish. These must be in accordance with the current Tally Law.

PILOTAGE: Send ETA through Radio Naval of Guayaquil 24 hours before arrival. Pilot will board vessel on the port side 1 mile from the sea buoy on arrival and disembark on the starboard side. In case Pilot not available it is recommended to anchor 1 mile from "Punta Jambeli" between the buoy and the lighthouse of Lambeli. Pilot boat is steel, black hull and white cabin, it carries pilot signals in accordance with International Regulations. Service available 24 hours a day. Pilotage is compulsory.

ANCHORAGES: Pilot will indicate recommended anchorage.

RESTRICTIONS: Depths 30 ft. at low water, from 0600 to 1800 hrs. draft allowable 30 ft. From 1800 to 0600 hrs. draft allowable 27 ft.

MAX. SIZE: At Espigon Quay depths alongside 30 ft. inner end to 36 ft. at quay head.

HEALTH: On the arrival of vessel the authorities come on board. If there are no illnesses aboard, the doctor gives free pratique. In case of any illness, Master should advise by radio and the vessel waits in quarantine for the visit of Port Health Doctor.

RADIO: Radio Naval of Guayaquil, Radio Naval of Puerto Bolivar VHF available call pilot station on Channel 16, effective reception 30 miles.

TUGS: 2 tugs available one at 1,200 h.p. and one of 500 h.p. Usually, ship's lines – are used. This service is free.

BERTHING: At Espigon Quay should be carried out within 1 hour before or after slack water. Tidal currents of 1–3 knots in dry season and 3–5 knots in Winter are at right angles to berthing face of the quay.

Wind: From 000° in the morning, speed 3 to 5 knots. From 210° in the afternoon and night, speed 3 to 5 knots.

STEVEDORES: Agents take charge of gangs.

MEDICAL: Hospitals, clinics and dental surgery in Machala, 6 km. from the port. There is also a medical service for vaccination.

DENSITY: Salt water.

FRESH WATER: Only available by tanker truck, capacity 7 tons.

FUEL: No fuel in this port. In case required one has to contact Guayaquil and they send it by small tankers.

GANGWAY/DECK WATCHMEN: The Agent names 1 or 2 watchmen for the vessel besides the maritime police and coast guard.

OPENING/CLOSING HATCHES: Carried out by shore gang supervised by someone on board.

CERTIFICATES: Vessel's Register and Tonnage Declaration required.

CUSTOMS ALLOWANCES: 100 cigarettes per person and 1 bottle wine or spirits per person.

IDENTIFICATION CARDS: Not necessary.

CONSULS: Consul of Peru, tel. 920608.

REPAIRS: There are no facilities in this port.

REPATRIATIONS: The Immigration Office can arrange.

AIRPORT: Distance to the airport is 6 km. It has 6 daily flights in connection with Guayaquil.

TIME: GMT minus 5 hours; there is no change.

HOLIDAYS: No work from 1700 hrs. on 24th December till 0800 hrs. on 26th December, and 1700 hrs. on 31st December till 0800 hrs. on 2nd January; Carnival; Maundy Thursday; Good Friday and Saturday; 1st May; 24th and 25th July; 9th October.

POLICE/AMBULANCE/FIRE: There are services.

TELEPHONES: Can be connected to the vessel.

DEVELOPMENTS: A marginal pier for general cargo is being built. Length of pier 360 m.

GENERAL: When the vessel is anchored, landing service is done by launches. They are called by one long whistle and two short ones. This service works 24 hours a day.

At night: A flashing light is to be used to call launches and not the whistle.

SHORE LEAVE: Passengers or crew do not need any special permit to land.

SHIPMASTER'S REPORT: 1978

Fresh Water: Water is available at anchorage by a barge of 48 ton capacity, at a cost of 120 Sucre (US $4.80) per ton. For ships berthed alongside, water is delivered by modern trucks of 7 or 8 ton capacity, at a cost of 70 Sucre (US $2.80) per ton.

Surveyor: A non-exclusive surveyor acting for Lloyds, Det Norske Veritas, and the Japanese Classification Society, is based at Guayaquil. Loadline survey and engine survey work done. He travels by air from Guayaquil (45 minutes).

Watchmen: One Customs and one Naval guard are obligatory, and should be fed and provided with room to sleep. Ship's crew should be employed day and night, one as accommodation watchman and one as deck watchman. Store-rooms should be locked up, and all loose equipment and lifeboat equipment stowed in lockers or accommodation. Only one accommodation door should be left unlocked, and a ship's watchman posted there, day and night.

Banana Cargoes: Loaded through side doors from the quay or from barges, or both together. No cranes, derricks or mechanised equipment used. About 400 men employed at one time. Very fast.

Casual Labour: This is freely available for painting hull, cleaning engine room, etc. The usual rate of $1 per hour with double for the foreman is now rising, some ships paying $1.50 during 1978. Overtime after 6 p.m., usually double. Possibly negotiable.

PURSER'S REPORT: See "Guayaquil".

AUTHORITY: Port Captain.

NOTES

Please also advise Shipping Guides Ltd.

Egypt, Arab Republic of

AIN SUKHNA: 29.35 N. 32.24 E. (See Plan Book)

DOCUMENTS: Free zone area, no entry documents to the offshore terminal are required.

PILOTAGE: SUMED's Mooring Master and his assistant board the tanker two miles Southeast of buoy S2.

Notifications: ETA messages should be sent by cable via Alexandria/Port Said Radio on leaving previous port. Cables should be prefixed "For urgent delivery send via Telex 54108 or 54033 SUMED UN" and be confirmed 72, 48 and 24 hours prior to arrival. (Day and Night berthing and operation). Arrival draft should be indicated.

LOCATION OF BUOYFIELD: (SBM's)

S1:	29° 35′ 16″ N.	32° 23′ 35″ E.
S2:	29° 34′ 12″ N.	32° 22′ 42″ E.
S3:	29° 35′ 17″ N.	32° 22′ 16″ E.

ANCHORAGE: Tankers can anchor to the S.E. of the buoyfield.

MAX. SIZE: The three berths are spaced one from the other so that each has:

Mooring Area Radius: 410 m. for S1 and S2 (accommodates vessels up to 285,000 d.w.t.); 320 m. for S3 (accommodates vessels up to 130,000 d.w.t.); Manoeuvring Area Radius: For S1 and S2, 1,220 m.; For S3, 915 m.

Water Depth and Draft Limitations:

For S1 and S2: 85 ft. minimum water depth
75 ft. maximum draft
For S3: 65 ft. minimum water depth
55 ft. maximum draft

RADIO: All messages to be sent via Alexandria/Port Said Radio. Ain Sukhna has a HF long range radio working on 2182 kHz and 4142.5 kHz.

VHF: Channels 16, 78 and 79.

TUGS: Tug "Sukhna" 3,200 hp with fire fighting and with anti-pollution equipment is available as required.

Mooring Launches: 500 hp mooring launches assist in mooring and hose operations.

BERTHING: *Ship's Derrick:* The ship's derrick should be capable of lifting 10 tons and rigged on the port side ready on arrival to take the gear on board for berthing the ship and connecting the hoses.

Hoses: Each berth has two cargo hoses with a 16 in. connection (ASA 150). Connection of hoses to be performed by the vessel under the supervision of SUMED's Mooring Master.

SUPPLIES: No bunkers or supplies are available or permitted.

MEDICAL: Private doctors available at Sukhna for emergency and hospitals are available in Suez.

SHORE LEAVE: There is no shore leave for personnel of vessels unloading at Ain Sukhna Terminal (disembarkment from vessels is strictly forbidden except in emergencies).

AGENCY SERVICES: Not required under normal circumstances.

TIME: GMT plus two hours.

SHIPMASTER'S REPORT: (1977)

Location: The Suez Terminal Ain Sukhna is located on the Western side of the Gulf of Suez, approximately 20 miles South of Suez Bay itself. It is the Southern Terminal of the Arab Petroleum Pipelines Company.

Some of the information to follow may prove to be of a temporary nature since from verbal information obtained, this vessel was part of the 1,000,000 tons of crude oil required by the Arab Petroleum Pipelines in conjunction with Builders Consortium for testing purposes and commissioning of the project.

The Ain Sukhna Terminal will then serve the newly completed Trans-Egypt pipe-line terminating in the Mediterranean to the West of Alexandria.

It is understood that both Terminals and the strip covering the pipe-lines is to become a Free Zone thus dispensing with Customs and a number of other formalities.

Approaches: The anchorage for Ain Sukhna is located approximately 4 miles South-east of the berths and anchorage area is bounded by the following co-ordinate positions:

A	29° 35′ North	32° 25.6′ East
B	29° 32.5′ North	32° 27.6′ East
C	29° 31′ North	32° 25.4′ East
D	29° 33.4′ North	32° 23.4′ East

with an average depth of 40 m. and a sandy bottom.

SBM Mooring Facilities: 3 SBM points are located in the following positions:

A	29° 35.3′ North	32° 23.6′ East
B	29° 34.2′ North	32° 22.7′ East
C	29° 35.3′ North	32° 22.3′ East

All SBM's are painted bright yellow and were originally planned to flash their respective identifications A-B-C in morse code. This is also part of the information received, but are in fact marked by an ordinary Flash every 16 to 18 seconds.

The Pilot and Berthing Masters, one acting in each capacity, are Italian and experienced tanker people. They are currently employed by the Builders of the terminal and are presently engaged in training their Egyptian substitutes who will take over all piloting and berthing duties at a later date.

It appears this vessel was the second unit to visit the terminal and all piloting and berthing operations were performed in a cool and efficient manner. Also while the commissioning of the terminal project is in progress an Egyptian Marine Superintendent, employed by Arab Petroleum Pipelines remains on board with the Pilot and Berthing Masters during the vessel's stay in the berth. This, together with the trainees, etc., may not always be convenient for vessels with limited accommodation. A total of 5 bunks in 4 cabins was required by the shore team.

A tug named *Fish* of 2,400 h.p. used as a workboat and for firefighting purposes, flying the French Flag and French manned remains in attendance during mooring operations, and can be called upon to push should this become necessary.

Operations: Since no information to the contrary was obtained it is envisaged that the terminal will operate round the clock, weather and other circumstances permitting.

Radio Facilities: During the voyage ships send their cables to SUMED CAIRO using Alexandria Radio and for the present ETAs and such were confirmed on a daily basis. It is envisaged that at some later date the normal 72, 48 and 24 hours confirmations prior to arrival will be maintained.

A 500 watt transmitter is to come into operation at Ain Sukhna in the very near future with a range of 500 km. and operating on the 2182 kc/s frequency. This will be the Pipelines own transmitter and manned on a 24 hour basis.

For the present Ain Sukhna Marine is to be called on VHF Channel 16 when vessels come within 50 miles radius from the terminal to confirm berthing information and procedures.

The Suez Agency MINSHIP is also contacted via Alexandria Radio. Sumed Cairo does not relay messages or copies to MINSHIP.

Port Papers; The documents and forms required are as for other Egyptian Ports but it is expected that these may be reduced upon the Pipeline becoming fully operational and in a Free Zone. Customs formalities might end but some sort of relationship with Suez might remain for Port Clearance purposes.

Agency: Agency work and formalities are covered by the EL MENIA Shipping Agency of the Canal Shipping Agencies Company at Suez. Cable address is MINSHIP SUEZ. Telephone numbers: Suez 2639, 2801 and 3085 which is the El Menia Offices.

According to information received, facilities for bunkers, water and most other requirements are not available at Ain Sukhna. The Agency however has given verbal assurances to the contrary, and claims the usual services are obtainable from Suez, such as repatriation, provisions and stores, doctor as well as bonded stores. A limited amount of fresh vegetables have been obtained which appear to be of good quality and reasonably priced. According to information from the chandler, *anything* can be obtained providing sufficient notice of the requirements is received, via the Agency. Repatriation for personnel sounds interesting since it would or could cut airflights and accommodation costs to the Persian Gulf for vessels employed on the Ain Sukhna run.

Requirements for Mooring – Cargo hose connections: The SBM moorings consist of 2 buoy lines. The vessel requires to have ready 2 normal good mooring ropes with sufficient good lashing. The vessels mooring lines are taken one at a time through the centre lead by mooring boat and are then attached by lashing to the buoy lines, and hove on board in the usual way. Good stoppers also are required.

The moorings are belayed on bitts on each side of the forecastle.

Each of the 3 berths is equipped with 2 × 24 in. floating hoses, similar to the Juaymah berths, but are each fitted with a floating "Y" piece to which further 16 hoses are connected. The last 4 lengths are approximately 100 ft. long and are hove on board on the port side. This requires a derrick and fittings capable of lifting 10 tons. Ships personnel do all the connecting and provides all gear and equipment such as good strops (3 in.), gaskets, bolts and spanners for normal 16 in. ASA connections.

At this stage the similarity between Juaymah and Ain Sukhna connection of hoses ends. The Ain Sukhna connections do not have the short angled spool piece so that the ships manifold and the hose flanges are at an angle of about 15 to 20 degrees, and require to be brought parallel by brute force. Time required connecting hoses at Ain Sukhna – 5 hours and some minutes. This was a considerable improvement on the connecting time of the previous vessel which required in excess of 7 hours.

The hose connections problem has been discussed with the Terminal.

Cargo: At the present time all cargo tanks are gauged and checked for water on arrival and gauged again on completion of the discharge or ballasting of tanks, for 'Dry Certificate' purposes. It is understood that when operations become normal, the gauging, etc., by shore staff will be dispensed with, and ships figures for arrival will be accepted without check so that vessels can remain inerted during all phases of operations at the terminal.

Possible changes being evaluated:

1. Changing the 2 SBM mooring lines to 1 single line ending in a length of chain suitable for use, and making fast to the Smith Towing Bracket.
2. Dispensing with 2 of the 4 × 16-in. connections. During tests the difference in the discharge rate attained by using 2 hoses as compared to using the 4 appeared to be insignificant.

AUTHORITY: Arab Petroleum Pipeline Co., SUMED.

ALEXANDRIA: 31.09 N. 29.53 E. (See Plan Book)

DOCUMENTS:

4 copies of Crew List.
Complete set of Manifests covering all cargo on board showing names of shippers and consignees.
4 copies List of passengers in transit.

Landing cards for passengers landing finally in A.R.E. and for those landing in A.R.E. in transit.

4 copies List of passengers finally landing in A.R.E. (if any) together with their addresses in A.R.E.

Deck log books showing date of last call at a A.R.E. port, completed up to the time of arrival.

For Quarantine: Quarantine Questionnaire in duplicate (Form No. 15 Q.A.) showing all ports of call, as well as dates of sailings for the last 30 days, nature of cargo on board, destination, as well as sickness among crew or passengers, if any, specially when it is presumed that the sick will be hospitalised. These forms can be filled on arrival if not available on board before arrival.

1 Crew List and 1 Passenger List.

Deratisation Certificate should be handy for inspection.

Clearance from Last Port.

For Immigration Officer:

Arrival Immigration form, duly completed.

1 Passenger List.

List of Passengers finally landing, in duplicate.

Crew List.

Valid passport with entry visa is required for landing in A.R.E. for passengers landing. Emergency visa can be granted on arrival if so required.

For Customs Use:

Bonded Store List, in duplicate.

Crew List and passengers' List in duplicate, showing rate of consumption of each.

PILOTAGE: Compulsory. Pilot boards off harbour entrance. International code signals used.

Vessels are not to proceed from the waiting area (31° 12.6′ N., 29° 44.5′ E. with radius of 1.5 miles) without a Pilot onboard.

RESTRICTIONS: Entrance channels 36 ft. depth, being dredged to 50 ft. Arriving vessels should keep 50 miles offshore between sunset and sunrise.

MAX. SIZE: Up to 35 ft. draft.

RADIO: Alexandria Radio, call sign SUH, operating 24 hours daily on 444, 500 and 8578 kHz and between 0600 to 1800 GMT on 12,974 kHz. Also harbour VHF Channel 16.

HEALTH: On entering, vessels must hoist the International Quarantine Signal for compulsory quarantine. Any sickness must be reported to the doctor. The Quarantine Doctor meets ships whilst entering the port and ships are boarded in turn.

In the event of a vessel arriving from a port that has been internationally declared infectious and the incubation period has not yet expired at the time of the ship's arrival at an A.R.E. port, the vessel is put under compulsory Quarantine, moored at an isolated berth and no shore contact is allowed. Nevertheless the ship can still carry out her normal operations on condition that all shore personnel are holding valid vaccination and/or inoculation certificates issued by the Quarantine Administration. The ship's personnel should also carry International Vaccination and/or Inoculation Certificates. Final landing passengers, not carrying such certificates, will be landed under Quarantine supervision and will be kept isolated at the lazarette until incubation period is over.

Pratique may be granted prior to ship's arrival provided the following conditions are adhered to:

(1) The vessel must be a regular liner known to the Quarantine Authorities and have a doctor on board.

(2) Details shown on the Quarantine Statement should be wirelessed to the Quarantine Authorities 24 hours prior to ship's arrival.

(3) Captains of vessels must declare before their arrival any accidents, which might have taken place on board prior to the arrival in port.

(4) The ship must not have called at any infected port.

TUGS: 5 tugs available up to 1,200 h.p.

BERTHING: Alongside quays in depths up to 35 ft.

TANKERS: Petroleum Basin: in West part of outer harbour, Berths 3 and 4, depth alongside 38 ft., max. length 700 ft., draft 35 ft. Berths 3 and 4: in East part of outer harbour. Stern to moorings.

It has been reported that tankers are required to take on ballast in excess of that deemed to be necessary by the Master, even in fine weather. One Master was ordered to bring his forward draft to 21 ft. Once the vessel was alongside a charge was made for deballasting the vessel.

FRESH WATER: Available by barge, and alongside most quays.

FUEL: Available by barge.

MEDICAL: All facilities available. International vaccination certificates required.

REPAIRS: *Ships Officers Report:*

Alexandria Shipyard: Builds vessels up to 40,000 tons. One drydock capacity 85,000 d.w.t., cranes with up to 30 tons capacity. One drydock capacity 20,000 d.w.t., cranes with capacity up to 30 tons. Fully equipped engineering workshops capable of carrying out extensive repairs alongside quays length 1,200 m. Depth alongside 11 m.

Alexandria Ship Repair Co: Ship repairs including engine repairs and boiler repair. Fully equipped workshops.

TIME: GMT plus 2 hours.

HOLIDAYS: The following are the public holidays in the A.R.E.:

1st and 2nd Day of Ramadan Bairam } changeable dates
Courban Bairam Eve
1st and end day of Courban Bairam } as based on Moslem Calendar
Mohamedan New Year's day
Prophet's Birthday (Mewlid El-Nabi)

Eastern Monday (Sham El Nassim) (changeable); Evacuation Day (18th June); Revolution Day (23rd July); Victory Day (23rd December).

SHIPMASTER'S REPORT: 1976

Approaches: Ships making the passage from Port Said to Alexandria are obliged to keep to the route laid down by the Egyptian authorities. The coastline is rather featureless and a good operational radar is invaluable. Radar conspicuous objects were found to be – Ras el Barr Lighthouse and fort, forts numbers 2 & 4, the forts and lighthouses at Brulos and at Rosetta Mouth and also Nelson Island.

The anchorage can be identified from a considerable distance by the number of ships at anchor off the port – often more than fifty. The prohibited area marked on Chart No. 243 to the East of Great Pass is ignored and ships anchor as convenient but as near to the Pilot ground as possible. Ras el Tin lighthouse, Great Pass beacon and the Minaret (248) were found to be good marks. There is a latticed beacon to the West of Great Pass Beacon which should not be confused with the latter. The new beacon is not marked on the chart and was stated by the Pilot to be for a new channel which is being constructed.

Arrival Procedure: It is important to register one's arrival with the Alexandria Port Control as soon as possible. This is done by means of VHF.

At 1100 hrs. (approx.) a traffic list is broadcast and ships mentioned should contact Port Control and obtain berthing instructions. They will probably be told to move in to the Pilot boarding ground 2 miles N.W. of Great Pass Beacon. When there, they should anchor again and await either further instructions or the unannounced arrival of the Pilot.

Berthage is decided at a meeting held around Noon so there may be a supplementary traffic list around 1400 hrs. In any case, it is a good idea to call Port Control at least once a day to remind them that you are still awaiting a berth.

A Pilot will take the ship into the anchorage in the Outer Harbour where Health, Immigration etc. officials board and clearance given. The Agent may also board. The main radio transmitter is sealed at this time. The ship will then await allocation of a berth.

Anchorages: At the anchorage outside the port depths vary from 20 to 30 fathoms but the holding ground seems to be good. This ship lay comfortably with seven shackles of cable out. Ships usually leave each other ample room in case of bad weather. There are good anchor bearings.

The anchorages inside the Outer and Inner Harbours are very congested and the holding ground (said to be sand) is not good. Time spent at anchor here can be a very anxious period.

The ship was anchored in the Inner Harbour just off the end of the Passenger Quay. When it was pointed out to the Pilot that, in the Master's opinion, she was too close to the 3 fathoms line at the old Aircraft Moorings, the Pilot stated that it would be all right because the ship wouldn't swing that way. If the vessel had swung the other way she would have gone aground.

At 0300 hrs. the following morning the ship began to swing onto the sand bank. Fortunately there was no wind and it was possible to turn her, weigh anchor and find another anchorage. A call to Port Control on VHF was made for a tug and Pilot but was not acknowledged.

The main engine should be kept at very short notice when at anchor inside the harbour.

The accommodation ladder should never be left down while at anchor but should be raised and lowered as required.

It is usually an easy matter to hail a passing boat and bargain for a trip either ashore or to another ship. However, all ship movements and boatwork are officially prohibited after dark.

Pilotage: The pilot launches are Fairmiles (ex H.D.M.L's.) painted light blue with white wheelhouses and the word 'Pilot' in black on the side of the bridge.

All the Pilots employed spoke good English and were competent. They board at any time during the day and often without the slightest warning. They order tugs as they think necessary.

The beacons and leading marks in the Great Pass were good but the fairway buoy at the outer end of the channel is no longer there. Most of the mooring buoys marked on chart number 3119 have either been removed or changed.

As a result of experience, the Pilots have considerable skill in handling ships in very congested situations and they are to be relied upon.

Arrival Formalities: These are carried out at the Outer Harbour Anchorage. A list of documents required follows.

Documents:

2 Health Declaration*
1 Crew Customs Manifest
1 Arrival Form†
1 Stores List
1 Bond Stores List
8 Crew Lists‡

* Supplied by Quarantine Officers
† Brought out by Agent.
‡ This is the minimum number required.

Notes:— Customs manifests, stores lists and crew lists should be typed out on plain paper – there does not appear to be any proper forms.

Immigration officers wish to see all Dis 'A' Books and will then issue Shore Passes which will have to be filled in by the ship. On departure, the officials ask for the passes but, if they have not been collected will only request that they be destroyed when the ship sails.

Berthage: Every foot of wharfage is used and space is at a premium. This ship lay at Berths 16 to 20 and in both cases had ships ahead and astern with very little room between.

Berth 16 has unequal but good fendering, Berth 20 has none at all. Both are concrete wharves. There are an adequate number of bollards.

Berths 16 and 20 are both at the Passenger Quay and the soundings obtained by hand lead are shown on the plan. In theory, telephones are available at both berths. Water is laid on but the pipe is of small bore and delivery is slow (about 8.5 t.p.h.). Arrangements should be made through the Agent.

Berthage is said to be under the sole control of the Harbour Master. Ships may be ordered to berth, shift or move out to anchor without any warning. It should be noted that the Pilots always insist that Agents are told of a move the day before. In no case did this ship receive official notice. It is wise to hand a written notice to the Agent informing him of the time required to prepare the main engine for a move. However, in our case, the Agent did not bother to forward the information to the Harbour Master.

Being at the Passenger Terminal means that a cargo vessel has to move out to anchor frequently to allow passenger ships to berth. Unfortunately there seems to be only one other berth with enough water alongside for a fully loaded ship such as our vessel.

Repairs: Repair firms are available. There is a shipbuilding yard and graving and floating docks. Radio and radar servicing as well as gyro are available. There is a Lloyds Register surveyor.

There is an abundance of small firms offering to do scaling and painting quite cheaply.

Medical: The Agent will arrange for a doctor to visit the ship if required. Unless special equipment and/or facilities are necessary, this is the best arrangement.

Repatriation: Apparently available via Cairo Airport.

Stores: Only small quantities of fresh fruit and vegetables were bought and these were good and cheap but the Catering Officer should be prepared to bargain.

Bunkers: The barges arrived alongside without any warning. There were seperate barges for D.O. and I.F.O. The pumping rate for D.O. was 75 t.p.h. and for I.F.O., 143 t.p.h. It is reported that it is advisable to check the viscosity of fuel.

Communications: While at anchor outside the port, the ship's radio station is available and is by far the best means of communication.

Port Control, Pilots and launches all use Channel 16 both for calling and working. Making contact with Port Control to report arrival or request information is a matter of perseverance.

Agents: Memphis Shipping Agencies.

There is a main office in the city (Sesostris St.) to which the Master must go to draw money. Two hours will be needed for this plus an hour for travelling. In addition there are two offices in the Main Hall of the Passenger Terminal between Berths 16 and 20.

The Agents will arrange for doctor, waterman and watchmen. They will advance cash to the Master.

Garbage: Subject to negotiations with a private company. An old lighter will be moored alongside while the ship is in port. All garbage should be thrown into it. It is completely uncovered and after a while, in Summer time, would probably become highly offensive.

Fresh Water: Although there was no reason to suspect the water supply, Stabochlor was added as a precaution. As the ship may be sent out to anchor without notice for an unspecified time, it is wise to keep the water tank topped up.

Watchmen: The civilian watchmen employed were obtained through the Agent.

Two uniformed guards are put aboard by one or other of the authorities. Both the official and civilian guards will stop and search stevedores and take from them the cargo they have taken.

Tugs: These are arranged by the Pilot. There are several ranging from old coal burners to fairly modern diesels and they are well handled and efficient.

Cargo Work: It is supposed to be against the law to work frozen cargo during daylight hours. Therefore work was mainly carried on between 1700 and 0500 hrs. with a break about 2300 hrs., the same labour working through.

A gang consists of a total of 20 men. There is a foreman, two winchmen and eight stevedores in the hatch. The rest work ashore and on the lorries. The men in the hatch 'spell' each other and this is a major cause of lost time.

The butter and cheese was loaded onto pallets which were landed on the lorries and the cargo transferred. There are three pallets per gang but shortages often occur and the gear is not very good, two of the pallets breaking under load.

Crane and Velle derrick drivers were generally competent.

Lloyds Agency was asked to appoint a surveyor to witness the opening of the hatches and later to conduct a continuous survey during discharge. The surveyor was particularly helpful at the commencement of discharge. His firm asked for and received an advance of one hundred Egyptian pounds in cash from the ship because payment through the Agent was said to be slow.

Miscellaneous: Photography is forbidden within the port area and a permit must be obtained to take a camera ashore.

It is important to fit rat guards. a fine of £20 may be imposed for each one not fitted.

There is at least one floating crane with a SWL of 150 tons.

The Port Surveyor will ask to see the Suez Canal Certificate. If this has been retained by the Canal Authorities, he will require a signed statement to that effect.

Departure: The Agent will inform the various authorities of the expected time of departure.

Immigration officers will board to check any changes in the crew.

The Agent will put aboard the clearance and the sanitary clearance and the senior official guard will demand a written statement that all crew are aboard.

The sea Pilot will board with the harbour Pilot. The latter disembarks into a motor boat as soon as the ship is clear of the berth, the former when she is clear of the Great Pass. If the weather is rough, a pilot ladder will be required outside instead of the accommodation ladder.

AUTHORITY: Alexandria Port Authority.

HAMRAWEIN: 26.15 N. 34.12 E.

APPROACHES: *Daytime Leading Marks:*

Front mark: 26° 15′ 05.984″ N. 34° 12′ 01.622″ E.

Rear mark: 26° 15′ 01.46″ N. 34° 11′ 54.95″ E.

BERTHING: Length of quay – 67 m. Max. draft 33 ft. Conveyor belt and mechanical apparatus available. Daily average loading rate 4,000 tons. In addition to mooring bollard on the quay there are four mooring buoys.

MARSA AL HAMRA (El Alamein): 30.59 N. 28.52 E.

WEPCO Terminal

The Mono Mooring Buoy is in an open and unsheltered roadstead. The mooring buoy is located at Lat. 30° 58.7′ N. Long. 28° 52.2′ E. It is 53 miles on a bearing of 255° from Ras-el-Tin lighthouse, Alexandria, and 3 miles off shore in approximately 66 ft. of water.

DOCUMENTS:

4 copies Crew List.

Deck log books showing date of last call at a U.A.R. port, completed up to the time of arrival.

Quarantine Questionnaire in duplicate (Form No. 15 Q.A.) showing all ports of call, as well as dates of sailings for the last 30 days, nature of cargo on board, destination, as well as sickness among crew or passengers, if any, specially when it is presumed that the sick will be hospitalised. These forms can be filled on arrival if not available on board before arrival.

Deratisation Certificate should be handy for inspection.

Clearance from Last Port.

Bonded Store List, in duplicate.

Crew List and Passengers' List in duplicate, showing rate of consumption of each.

PILOTAGE: The S.-S.W.-W. quandrant from the buoy is prohibited anchorage area, Gebisa Reef is at Lat. 30° 58′ 30″ N., Long. 28° 49′ 10″ E., at 2.7 miles on a bearing of 260° from the buoy.

The mooring buoy carries a light, flashing 6 times per minute, and visible all round to a distance of 4.5—5 miles in clear tropical weather.

Surface current sets East at 10 miles offshore at the rate of 1 knot.

Maximum rise and fall of tide in the mooring area is 2 ft.

Vessel arriving should approach to within 2 miles North of the buoy, where they will be met by the Harbour Master or Pilot who will advise the ship's Master on approaches to the mooring buoy, mooring and unmooring.

RESTRICTIONS: Normally vessels are moored during daylight hours only, but permission can be obtained to sail at night. arriving vessels should keep 50 miles off shore between sunset and sunrise.

HEALTH: Hoist International Code Quarantine signals when entering. Any sickness must be reported to local authorities.

RADIO: The commercial radio station at Alexandria will handle WEPCO radio traffic. Alexandria Coast Radio Station (call sign SUH) operates 24 hours a day on 444, 500 and 8,578-kHz, and between 0600 hrs. and 1800 hrs. GMT on 12,974 kHz.

Ships nearing Al Hamra Terminal may contact the terminal by FM/VHF radio on 156.70 mHz or 2182 kHz.

While at the mooring, ship-to-shore communication is by portable VHF radio-telephone units, under the direct charge of the Mooring Master.

TUGS: Not available and not required.

BERTHING: 2 good lines must be ready on the forecastle to be sent to the buoy plus a further 2 lines for use as messengers. Ship's lifting gear must be ready near the port manifold for lifting and connecting 2×12-in. hoses, with proper reducers if the manifold does not fit 12 in. hose with 150 ASA standard flanges. The total weight per hose assembly is approximately 5 tons. Maximum loading rate is 3,700 t.p.h.

A pilot ladder must be safely rigged for immediate use and long enough to reach the Mooring Master's launch. At night adequate lighting must be rigged overside to enable the Mooring Master to approach and board the ship safely, and searchlights should be rigged on both sides of the bridge to assist in running lines to the buoy.

BALLAST: No dirty ballast may be pumped overboard, and it is the ship's Master's responsibility to ensure that no oil – whether crude, diesel, bunker or bilge – is pumped or spilled into the waters of and surrounding the Terminal. Ballast can be pumped ashore through one or both of the floating hoses direct to disposal facilities on shore.

CUSTOMS ALLOWANCE: Present regulations at El Alamein allow each seaman to retain in his possession a maximum of 50 cigarettes or 1 ounce of tobacco or 5 cigars. All other smoking items must be collected and listed before arrival. The list will be checked by Customs before sealing the locker, and any discrepancies will be subject to fines. There must be no items aboard of Israeli origin.
FRESH WATER: Not available.
FUEL: Not available.
MEDICAL: Nearest hospital facilities are at Alexandria, at least 90 minutes drive from the terminal.
TIME: GMT plus 2 hours.
AUTHORITY: Western Desert Petroleum Company.

RAS GHARIB: 28.21 N. 33.06 E.

A natural port at the Western side of Suez Gulf sheltered by the Cape and a chain of reefs.

DOCUMENTS:

4 copies Crew List.
Deck log books showing date of last call at an A.R.E. port, completed up to the time of arrival.
Deratisation Certificate should be handy for inspection.
Clearance from Last Port.
Bonded Store List, in duplicate.
Crew List and Passengers' List in duplicate, showing rate of consumption of each.

Quarantine Questionnaire in duplicate (Form No. 15 Q.A.) showing all ports of call, as well as dates of sailings for the last 30 days, nature of cargo on board, destination, as well as sickness among crew or passengers, if any, specially when it is presumed that the sick will be hospitalised. These forms can be filled on arrival if not available on board before arrival.

PILOTAGE: Compulsory. International Pilot flag must be hoisted and Pilot will board vessel on arrival. Vessels should approach the anchorage from South-eastward and wait Southward of the prohibited anchorage until boarded by the Harbour Master who will pilot them either to moorings or to an anchorage clear of the prohibited area of the pipe-lines.

2 pairs of leading beacons stand about 4 and 5.5 cables, beside 3 others that stand about 12 cables Southward of Ras Gharib light-structure. About 2 cables further Southward are 2 leading beacons. All the above beacons are difficult to identify until close inshore.

ANCHORAGE: Ras Gharib anchorage, South-westward of the cape, affords some shelter, but a moderate swell round the cape is experienced on most days. Vessels can obtain anchorage in depths of about 5 fathoms.

During most of the year there are Northerly winds, force 3–5, but in December and January there are occasionally calms. On very rare occasions, there are Southerly gales of short duration which make the anchorage untenable.

The Northerly wind causes some swell in the anchorage, but it is not normally severe enough to interfere with the working of lighters or boats of moderate size. It is, however, unpleasant for small boats, except alongside the piers, which are well protected.

Except in the vicinity of the piers, there is usually some swell on the beaches. There is practically no rainfall and sand storms occur only very occasionally and they do not interfere with work in the anchorage.

Anchorage is prohibited, owing to the existence of pipe-lines, within an area indicated by pecked lines on the chart.

HEALTH: On entering, vessels must hoist the International Quarantine Signal for compulsory quarantine. Any sickness must be reported to the doctor, specially when it is presumed that the sick will be hospitalised.

The vessel's personnel should carry international vaccination and/or inoculation certificates.

MAX. SIZE:

	Northern Pier No. 1	*Southern Pier No. 2*	*New pier No. 3*
Depth at the pier	27 ft.	36 ft.	78 ft.
Max. permissible draft	24 ft.	32 ft.	55 ft.
Max. length for tanker	450 ft.	600 ft.	980 ft.
Min. length for tanker	350 ft.	500 ft.	600 ft.
Diameter of crude hose	18 in.	18 in.	30 in.
Diameter of water hose	10 in.	12 in.	18 in.
Min. capacity of tanker's derrick	5 tons	5 tons	5 tons
Loading capacity	650 t.p.h.	1200 t.p.h.	2000 t.p.h.
Max. permissible load	6,000 tons	30,000 tons	100,000 tons

SUPPLIES: Transit and fresh provisions as well as deck and engine stores provided by the United Arab Contracting and Marine Supply Company.
FRESH WATER: Not available.
FUEL: Not available.
CUSTOMS ALLOWANCE: Present regulations allow each seaman to retain in his possession a max. of 50 cigarettes or 1 ounce of tobacco or 5 cigars. All other smoking items must be collected and listed before arrival. The list will be checked by Customs before sealing the locker, and any discrepancies will be subject to fines. There must be no items aboard of Israeli origin.
TIME: GMT plus 2 hours.
AGENCY: See "Suez Canal".

RAS SHUKHEIR: 28.08 N. 33.17 E. (See Plan Book)

ADVICE OF ARRIVAL: It is important that ships establish radio contact with "GUPCO" (Gulf of Suez Petroleum Co.) when 3 days distant from Terminal and maintain this contact until just previous to arrival at the Terminal. All ships should send a 72-hour ETA message to "Panintoil Cairo" giving the best estimate of ship's arrival time at the Terminal. This ETA message should also include a definite statement of the details of any equipment required from shore for connecting submarine hoses to ship's manifold. Further ETA messages should be sent to "Panintoil Cairo" when the vessel is 24 hours and 12 hours distant from Ras Shukheir and at any other time any appreciable change occurs in the original ETA or those subsequent thereto. The 12 hour ETA should include a positive statement regarding ship's readiness to load on arrival and the number of hours that will be required to discharge ballast after ship is berthed in mooring.

6 hours before arrival, tankers should call Ras Shukheir on VHF Channel 16 to be advised if berthing is available or not, also to be advised of the approximate time for berthing.

DOCUMENTS:

4 copies Crew List.
Deck log books showing date of last call at an A.R.E. port, completed up to the time of arrival.
Deratisation Certificate should be handy for inspection.
Clearance from Last Port.
Bonded Store List, in duplicate.
Crew List and Passengers' List in duplicate, showing rate of consumption of each.

Quarantine Questionnaire in duplicate (Form No. 15 Q.A.) showing all ports of call, as well as dates of sailings for the last 30 days, nature of cargo on board, destination, as well as sickness among crew or passengers, if any, specially when it is presumed that the sick will be hospitalised. These forms can be filled on arrival if not available on board before arrival.

PILOTAGE: Compulsory. International pilot flag must be hoisted and Pilot will board vessel on arrival. Ras Shukheir lighthouse is located in Lat. 28° 08′ 15″ North, and Long. 33° 16′ 20″ East. It is a white flashing light, flashing every 3 seconds and visible for 10 miles.

Gebal Gharib, situated about 18 miles South-westward, 5,742 ft. high. It makes a nearly perfect equilateral triangle with Ras Shukheir and Ras Gharib Lighthouse. Ras Gharib Lighthouse is an excellent landmark whether by day or night for vessels approaching from North, but caution should be exercised since this Light is obscured from 308° to the Westward. The sea-berth buoys are unlighted.

The company's Mooring Master will meet all incoming tankers about 2 miles from Ras Shukheir Terminal on a bearing of 290/300° from Ras Shukheir Lighthouse and will advise ship's personnel in mooring and unmooring, raising and lowering of hoses.

Vessels are requested to have a pilot ladder safely and securely rigged, ready for immediate use, and long enough to reach the Mooring Master's launch. If at night, adequate lighting must be rigged overside for the Mooring Master to approach the side and climb the ladder safely.

ANCHORAGE: There are a number of oil well installations, structures and submarine pipelines located in the Gulf of Suez opposite to Ras Shukheir Terminal and approaching vessels are warned of these obstacles in manoeuvring and anchoring. Vessels should approach from the Eastward and if necessary anchor S.E. of the sea berth. *Never anchor North of the sea berth.*

Tankers should not anchor except in Ras Shukheir anchorage area which is located as follows:

Lat. 28° 04′ 30″ N.
Long. 33° 22′ 30″ E.

RESTRICTIONS: The Ras Shukheir Terminal operates 24 hours per day, 7 days a week. Ships are loaded and unmoored at any hour, weather and other circumstances permitting. Vessels are moored during daylight hours only, however, an exception may be made at the discretion of the Terminal.

HEALTH: The vessel's personnel should carry international vaccination and/or inoculation certificates.

RADIO: The Alexandria or Port Said coast radio stations will handle GUPCO radio traffic. Ships may contact GUPCO through their cable address "Gupcoil Cairo". The message will be received on their Cairo Radio Telegraph Office local teleprinter circuit. Tape perforated and relayed to the Ras Shukheir Terminal.

Cables from Ras Shukheir Terminal to the ships would be handled in the same manner. The Alexandria or Port Said coast radio stations transmit traffic lists at regular intervals listing the call signs of all ships for which they have traffic on hand. Thus any ship hearing its call sign in the traffic list of the coast station would call the coast station immediately after the traffic list.

VHF: When ships are near Ras Shukheir Terminal, they may use their FM/VHF radios to contact the Terminal using 160.70 mc/s or 160.80 mc/s.

MAX. SIZE:

	Pier No. 1	*Pier No. 2*	*Pier No. 3*
Depth at the pier	60 ft.	95 ft.	90 ft.
Max. permissible draft	45 ft.	55 ft.	58 ft.
Max. length for tanker	800 ft.	1200 ft.	800 ft.
Min. length for tanker	600 ft.	750 ft.	600 ft.
Diameter of crude hose	36 in.	36 in.	36 in.
Diameter of water hose	16 in.	16 in.	18 in.
Min. capacity of tanker's derrick	5 tons	5 tons	5 tons
Loading capacity	4000 t.p.h.	4000 t.p.h.	4000 t.p.h.
Max. permissible load	60,000 tons	200,000 tons	70,000 tons

SUPPLIES: Transit and fresh provisions as well as deck and engine stores provided by United Arab Contracting and Marine Supply Co.

SUBMARINE HOSE LOADING BERTH: Tanker is loaded by means of submarine pipelines to which are attached 2 hoses for oil loading and 1 hose for discharging ballast water. A 36 in. line transports the oil and a 16 in. line, the ballast water. The loading berth is located approx. 940 m. (3080 ft.) offshore in a water depth of approx. 60 feet (10 fathoms). The loading and ballast lines are laid in the same trench and run in a direction N. 55° 00′ E. The mooring buoys are numbered 1, 2, 3, 4 and 5 starting with No. 1 North of the mooring and running consecutively in a clockwise direction.

LOADING READINESS AND ARRIVAL TIME: The company will make every effort to load vessels upon arrival or as promptly as berth is available, weather permitting. Notice of Readiness will not be accepted as at time of arrival unless the vessel is in all respects ready to load. Arrival time will be considered as the time the Mooring Master boards the vessel or the time that vessel anchors, whichever occurs first.

FRESH WATER: Not available.

FUEL: Not available.

REPATRIATION: Not recommended.

CUSTOMS ALLOWANCE: Present regulations allow each seaman to retain in his possession a max. of 50 cigarettes or 1 ounce of tobacco or 5 cigars. All other smoking items must be collected and listed before arrival. The list will be checked by Customs before sealing the locker, and any discrepancies will be subject to fines.

TIME: GMT plus 2 hours.

AGENCY: See "Suez Canal".

SAFAGA: 26.46 N. 34.00 E.

DOCUMENTS: The following documents are required on arrival Quarantine Questionnaire in duplicate (Form No. 15 Q.A.) showing all ports of call, as well as dates of sailings for the last 30 days nature of cargo on board, destination, as well as sickness among crew or passengers, if any, specially when it is presumed that the sick will be hospitalised. These forms can be filled on arrival if not available on board before arrival.

1 Crew List and 1 Passenger List.
Deratisation Certificate should be handy for inspection.
Clearance from Last Port.
Complete set of Manifests covering all cargo on board showing names of shippers and consignees.
4 copies List of Passengers in Transit.
4 copies Crew List.
Deck log books showing date of last call at an A.R.E. port, completed up to the time of arrival at Port Said or Suez.

PILOTAGE: Compulsory. International pilot flag must be hoisted and Pilot will board vessel on arrival. Masters should endeavour to arrive at the N. end of the island by sunrise, at Safaga Port by early morning; the light behind them will show up the reefs clearly. Wind, light in the morning, gains strength during the day, making tying up more difficult. A beacon (Morewood Beacon), visible a mile off, is erected on the Southern spit of the island. After rounding the spit, Masters keep 5 cables clear of visible reefs and enter the harbour keeping the 2 large beacons to the North of the pier in line. Anchorage is then indicated by a small red or white flag. The Manager or his representative, of the Safaga Phosphate Company will meet ships in launch with instructions on berthing.

MAX. SIZE: Safe draft in the fairway, over reefs and alongside pier: 27 ft. 6 in.

HEALTH: On entering, vessels must hoist the International Quarantine Signal for compulsory quarantine. Any sickness must be reported to the doctor especially when it is presumed that the sick will be hospitalised.

The vessel's personnel should carry international vaccination and/or inoculation certificates.

BERTHING: There are 2 mooring buoys marked B and C and 2 mooring posts marked A and D.

(1) The anchor position is marked by a small red or white flag. When mooring, manilla ropes only should be used, as wire ropes can be run out afterwards when ship is alongside.

(2) Due to rocky nature of sea bottom, it is very desirable that ship in coming into berth, does not override her anchor, as, if this happens, chain is apt to foul coral bottom and cause trouble later on.

(3) Endeavour to have all way off ship when anchor position is reached. Drop anchor as close to flag as convenient and go astern. If necessary check cable when 2 shackles have been paid out.

(4) Run rope to Buoy C, run rope to Buoy B, run rope to Post D, then run rope to Post A. Run Spring to S1, S2, S3, and pull alongside. Company's launches will run all ropes.

(5) If wind is blowing strongly off shore, a Spring to S3, may be run immediately a good rope to Buoy B is made fast.

(6) The best way to reach the anchor position is to steer straight for same, keeping Buoy C on port side. This will keep vessel clear of Buoy C and when anchor is dropped, the stern should swing clear of this Buoy. If it does not, a rope can be run to S3 and the stern pulled in before falling back on pier.

(7) With anchor dropped as shown, 6 shackles should see No. 1 hatch at the pier, but if chain is slackened carelessly, it may foul bottom and be insufficient to reach pier.

If visibility is very good, a course can be made between the Hyndman and Cannon Reefs, and altered to bring the beacons referred to into line.

Rock phosphate and ground phosphate are loaded at this port for shipment all over the world. The mines are situated some 30 km. away and are connected by company's own railway. Rock phosphate loaded (1,000 metric tons per day) from elevator and phosphate in bags by ship's gear.

Cargo vessels can berth alongside a new quay of 600 m. with a draft of 27 ft. Quay used for loading and discharging general cargo. It can accommodate 2 medium size vessels and one large vessel. Part of the quay is used by vessels discharging aluminium.

STEVEDORES: Canal Stevedoring Co.

SERVICES: Water, deck and engine stores and provisions provided by Egyptian Contracting and Marine Supply Co.

TIME: GMT plus 2 hours.

HOLIDAYS: The following are the public holidays in the A.R.E.:

1st and 2nd day of Ramadan Bairam Courban Bairam Eve	} changeable dates
1st and end day of Courban Bairam Mohamedan New Year's day Prophet's Birthday (Mewlid El-Nabi)	} as based on Moslem Calendar

Eastern Monday (Sham El Nassim (changeable); Evacuation Day (18th June); Revolution Day (23rd July); Victory Day (23rd December). Friday is the Sabbath day.

AUTHORITY: Ports and Lights Administration.

AGENCY: See "Suez Canal"

SIDI KERIR: 31.06 N. 29.37 E. (See Plan Book)

DOCUMENTS: Free zone area, no entry documents to the offshore terminal are required.

PILOTAGE: SUMED's Mooring Master and his assistant board the tanker two miles North of buoy A1.

Notifications: ETA messages should be sent by cable via Alexandria/Port Said Radio on leaving previous port. Cables should be prefixed "For urgent delivery send via Telex 54108 or 54033 SUMED UN" and be confirmed 72, 48 and 24 hours prior to arrival. (Day and Night berthing and operation). Arrival draft should be indicated. Vessels should arrive with a trim of 8 ft. by the stern and appropriate ballast to ensure that propeller is completely submerged.

LOCATION OF BUOYFIELD: (SBM's)

A1:	31° 06′ 26″ N.	29° 36′ 46″ E.
A2:	31° 05′ 32″ N.	29° 35′ 38″ E.
A3:	31° 04′ 24″ N.	29° 35′ 37″ E.
A4:	31° 04′ 54″ N.	29° 37′ 39″ E.
A5:	31° 05′ 40″ N.	29° 38′ 24″ E.

ANCHORAGE: Tankers can anchor to the North and N.W. of the buoyfield.

MAX. SIZE: The five berths are spaced one from the other so that each has:

Mooring Area Radius: 410 m. for A1 and A2 (accommodate vessels up to 285,000 d.w.t.); 320 m. for A3, A4 and A5 (accommodate vessels up to 130,000 d.w.t.); Manoeuvring Area Radius: For A1 and A2, 1220 m.; For A3, A4 and A5, 915 m.

Water Depth and Draft Limitations:

For A1 and A2: 85 ft. minimum water depth
75 ft. maximum draft
For A3, A4 and A5: 60 ft. minimum water depth
52 ft. maximum draft

RADIO: All messages to be sent via Alexandria/Port Said Radio. Sidi Kerir has a HF long range radio working on 2182 kHz and 4142.5 kHz.

VHF: Channels 16, 78 and 79.

TUGS: Tug "Kerir" 3100 hp with fire fighting and anti-pollution equipment is available as required.

Mooring Launches: 500 hp mooring launches assist in mooring and hose operations.

BERTHING: *Ship's Derrick:* The ship's derrick should be capable of lifting 10 tons and rigged on the port side ready on arrival to take the gear on board for berthing the ship and connecting the hoses.

Hoses: Each berth has two cargo hoses with a 16 in. connection (ASA 150). There is a ballast unloading facility with 16 in. connection. Connection of hoses to be performed by the vessel under the supervision of SUMED's Mooring Master. Vessels are required to arrive with clean ballast until deballasting unit at Sidi Kerir is in operation which is expected to be during second half of 1978.

SUPPLIES: No bunkers or supplies are available or permitted.

MEDICAL: Private doctors and hospitals are available in Alexandria.

SHORE LEAVE: There is no shore leave for personnel of vessels loading at Sidi Kerir Terminal (disembarkment from vessels is strictly forbidden except in emergencies).

AGENCY SERVICES: Not required under normal circumstances.

TIME: GMT plus two hours.

SHIPMASTER'S REPORT: *General:* Sidi Kerir is the northern end of the pipe-line from Sukhna in the Gulf of Suez. The pipe-line is owned by the Arab Petroleum Pipeline Co. and operated by SUMED Co. (Suez – Mediterranean).

The Sidi Kerir Terminal (Tankfarm) position is at 31° 03′ N., 29° 40′ E. There are at the moment 5 SBM's for loading vessels, more are planned for the future. The buoy field is marked by the following points: "A" 31° 08′ N. 29° 37′ E., "B" 31° 04′ N. 29° 31′ E., "C" 31° 01′ N. 29° 35′ E., "D" 31° 05′ N. 29° 41′ E.

The area within ABCD is a prohibited anchorage area and may not be entered without a pilot.

The position of the 5 SBM's is within the area:

1.	31° 06.7′ N.	29° 35.7′ E.	For loading Arabian Light & Kirkuk Crude
2.	31° 05.9′ N.	29° 36.9′ E.	For loading Arabian Light & Kirkuk Crude
3.	31° 04.6′ N.	29° 36.9′ E.	For loading Arabian Light & Kirkuk Crude
4.	31° 05.0′ N.	29° 37.9′ E.	For loading Arabian Light & Kirkuk Crude
5.	31° 05.1′ N.	29° 38.6′ E.	For loading Basrah Crude.

(a) The current sets usually from NW at about 0.5 knots but may increase during Summertime to 1 knot; there is no considerable tide.

(b) References: BA chart 3356; BA pilot book 49, 6th edition 1976.

Documents: One crew list, one ship's stores list and clearance from last port.

Pilotage: Pilot also acts as loading master and boards vessel at the anchorage. A pilot ladder/accommodation ladder combination is to be rigged on the starboard side. Vessels must give a lee for the pilot launch. Pilots work preferably during daylight hours.

Anchorage: The anchorage is one to two miles north of the buoyfield in 20 to 40 fathoms of water. There is good holding ground on sandy bottom; no shelter during northerly winds or swell. The port closes during strong winds and swell. An open sea approach; no dangers on the way to the anchorage. The coastline is low desert and gives a poor echo, the best radar echo during the approach was the tankfarm and the pipe-line.

Max. Size: Max. draft 70 ft. No limit on size of vessel.

Radio: ETA information to be given preferably via Alexandria Radio to telex number 4108 attention "SUMED operations — Alexandria" at 72, 48, 24 hours prior to arrival. Initial message should give call sign; Summer deadweight; Summer draft; cargo requirements with name of crude and approximate quantity required in cubic metres and long tons, also maximum loading rate required in cubic metres; last port; whether vessel carries 2 × 16 in. reducers.

Health: Free pratique is given by the pilot/loading master.

Tugs: One tugboat, 5000 h.p., is on standby at the buoyfield and will assist on request.

Berthing: The vessel moors to a SBM. the mooring equipment, 2 wire slings, 2 shackles and a toolbox, are taken from the launch.

SBM Loading Berth: The hoses are connected by the ship's crew under the supervision of the Loading Master. The (2 × 16 in.) hoses are of a floatable type with a Cramlock connection.

The maximum loading rate is given as 15.000 Cm/h or as requested by vessel. Before completion of cargo the pumps are stopped and the balance loaded by gravity. At the present time the dirty ballast facilities are under construction.

Repairs/Drydocks: At Alexandria about 12 miles to the east. No facilities at Sidi Kerir.

Time: GMT plus 2 hours.

Density: 1026.

Supplies/Services: None.

Authority: The Pilot/Mooring Master acts as Government Representative.

AUTHORITY: Arab Petroleum Pipeline Co. – SUMED.

SUEZ CANAL (including Port Said and Suez):

DOCUMENTS:

Also see "Restrictions".

The following documents are required on arrival:

The last Classification Certificate issued.

Information concerning a vessels transitting the canal.

4 copies Crew List.

Ship's Register and Suez Canal Special Tonnage Certificate.

General arrangement and capacity plans of the vessel, if transitting the Suez Canal for the first time, or, undergone any alterations.

Suez Canal Authority's double bottom tanks capacity form.

Navigability form.

Complete set of Manifests covering all cargo on board showing names of shippers and consignees.

4 copies List of Passengers in Transit.

Landing cards for passengers landing finally in the A.R.E. and for those landing in the A.R.E. in transit.

4 copies List of passengers finally landing in the A.R.E. (if any) together with their addresses in the A.R.E.

Deck Log Books showing date of last call at an A.R.E. port, completed up to the time of arrival at Port Said or Suez.

Mail Waybills for ports beyond Suez Canal ports and alternatively, a document from the Master is required (cargo and passenger ships only).

Quantity of bunkers, water and cargo on board.

Free Pratique Certificates issued by the local Quarantine Doctor.

In case of a Northbound vessel loading or discharging alongside quay staying more than 24 hours in Suez, the following documents should also be presented.

(1) Load Line Certificate.
(2) Safety Equipment Certificate.
(3) Radio Safety Certificate.
(4) Documents covering names and ratings of ship's officers and their certificates.

For Pilot's Use:

(1) Arrival form of the Suez Canal Authority.
(2) Declaration "E" form for dangerous cargo on board in transit.
(3) Any other documents relating to shipments of dangerous cargo, radio-active or fissile.

N.B. Plain Suez Canal Forms are normally handed to Master by Pilots or ship's Agents, to be filled on arrival and also for use on consequent voyages.

Quarantine Authorities:

Quarantine Questionnaire in duplicate (Form No. 15 Q.A.) showing all ports of call, as well as dates of sailings for the last 30 days, nature of cargo on board, destination, as well as sickness among crew or passengers, if any, specially when it is presumed that the sick will be hospitalised. These forms can be filled on arrival if not available on board before arrival.

1 Crew List and 1 Passenger List.

Deratisation Certificate should be handy for inspection.

Clearance from last port.

Passports:

For Immigration Officer the following documents are required on arrival:

Arrival Immigration form, duly completed.

1 Passenger List.

List of Passengers finally landing, in duplicate.

Crew List.

Valid passport with entry visa is required for landing in A.R.E. for passengers landing. Emergency visa can be granted on arrival if so required.

For Customs Use:

(1) Bonded Store List, in duplicate.
(2) Crew List and Passengers' list in duplicate, showing rate of consumption of each.

PILOTAGE: *Port Said:* On arrival at the Pilot station at Port Said, vessels should contact the pilot boat announcing their arrival and to receive the necessary instructions for either: *(a)* to stop in order to receive a Pilot; *(b)* to anchor at the waiting area; *(c)* to proceed to the channel where the Pilot boards.

Vessels arriving from sea can contact the Canal Authority by wireless on the following frequencies:

Port Said: Port Office freq. 2182 kc/s. Calling Port Said 1; freq. 156.35 mc/s. Calling Port Said 7; VHF can also be used on Channel 16.

Pilot boat: freq. 156.3 mc/s. Calling Pilot boat at a range of 20 km. Call sign 4.

Vessels transitting canal can also contact S.U.Q. at Ismailia by wireless, on the following frequencies: freq. 454 kc/s., 425 kc/s., 468 kc/s.

Waiting area at Port Said:

The waiting area where vessels anchor waiting for Port Pilots, is situated to the West of a line joining the West buoy of the first pair of light buoys and the fairway buoy, and South of the parallel of latitude passing through the fairway buoys. All ships waiting to enter Port Said Channel, have to anchor at this area. It is of great importance that a vessel should announce its arrival immediately on reaching the Pilot station for 2 reasons:

(a) To avoid delay in entering the harbour, as vessels are piloted in accordance with their turn in contacting the pilot boat.
(b) The arrival of a vessel is immediately transmitted to the Suez Canal Authority's Office, thus enabling the Agent to declare the ship in time, even before she enters the harbour and ensure her transit with the appropriate convoy. Such registration cannot be done if the vessel does not adopt the above procedure. Passenger vessels are given priority in turn, in entering the harbour.

Notice is hereby given that the entrance channel to Port Said harbour is buoyed as follows:

(a) A Fairway light buoy painted with white vertical stripes showing a white flashing light every 5 seconds approx. fitted with radar reflector and surmounted by a top mark resembling St. Andrew's Cross.
(b) *Position of buoy:* 032° 40′ – 6.04 miles from Port Said lighthouse.
(c) The first pair of light buoys indicates the entrance of the channel. The West buoy is painted black and surmounted by a conical superstructure giving a flashing green light.
(d) *Position of buoys:* 037° 03′ at a distance of 5.13 miles from Port Said lighthouse.
(e) The East buoy is painted red and surmounted by a cylindrical superstructure giving a flashing red light.
(f) *Position of buoy:* 127° 40′ from the West buoy at a distance of 1,969 ft. from the West buoy.
(g) Several other pairs of lights indicate the limits of the channel to the East and West. The East buoys are painted red and show a fixed red light and the West buoys are painted black and show a fixed green light.
(h) A fixed red light on a pylon on the North quay of Abbas Basin in line with an occulting red light on a pylon West of the fuel oil tanks at Raswa, indicates the axis of the entrance channel to the harbour.

Pilotage is compulsory on entering or departing Port Said Harbour as well as in the Canal and it is free of charge for vessels transitting the Canal except when shifting or changing berth. Vessels not transitting the Canal are subject to the payment of these charges both at Port Said and Suez. Vessels under 300 tons Suez Canal net tonnage are allowed to transit the Canal from any direction with a *Patron* (instead of Pilot) without being compelled to attend to convoy timings and after authority had been granted by the Suez Canal Authority.

In view of the continuous expansion in the sizes of vessels, with the consequent increase in the height of the hull, it is becoming very difficult for the roads Pilot to board vessels by using the customary rope ladder without causing him considerable fatigue. Therefore, it is recommended that Owners and Masters of large size tankers instal on their vessels a mechanical hoist for Pilot, and that one of the ship's officers be present to ensure its correct use, for the safety of the Pilots and to avoid accidents.

It is also recommended that the Mechanical Hoist be installed at a convenient distance from the effect of the propeller and away from the vessel's stern.

Suez:

As regards Suez Bay, it is sheltered from all points except from South. Very occasionally during Southerly gales (period December to April) motor-launches and boats are unable to communicate with ships in the roads.

Newport Rock lighthouse marks the Southern extremity and ships usually anchor opposite the entrance to the Suez Canal. All ships entering the port of Suez have to anchor in the pilotage zone which is limited by the imaginary line which extends from Ras Adabiya to Eyoun Moussa and comprises the coastal zone North of this line up to the Suez Canal entrance.

The town stands on a spit of the desert projecting Eastward with the Bay of Suez on its Southern side, Lat. 29° 58′ N., Long. 32° 10′ E.

Pilotage in the port of Suez is compulsory for all vessels entering, moving within or leaving the port.

Naval ships and vessels whose Suez Canal net tonnage is less than 300 tons are exempted from pilotage, but they have to contact the Pilot boat for orders prior to making any movement. Vessels exempted from pilotage may have a Pilot if so required.

Pilotage Waiting Area at Suez: The boundaries of the pilotage waiting area for ships arriving at Suez from South have been limited as follows:

Northerly:	Lat. 29° 52.16′ N.
Southerly:	Lat. 29° 51.73′ N.
Easterly:	Long. 32° 34.5′ E.
Westerly:	Line joining Newport Rock and Buoy No. 3.

The area East to Long. 32° 33.93′ E. is allowed for ships drawing less than 25 ft. The area West 32° 33.93′ E. is for ships drawing more than 25 ft.

The Pilot boat is normally stationed at the proximity of green buoy No. 1 South of Newport Rock.

When entering the pilotage waiting area, the following signals should be hoisted: Pilot – Vessel's signal letters. Quarantine – Nature of dangerous cargo (if any).

Vessels have to contact the pilot boat for instructions, reduce speed and have the pilot ladder ready.

Vessels wishing to anchor in Suez roads on their exit from Canal for the purpose of carrying out repairs, cargo operations, replenishment of bunkers, water, etc., should when ready to sail hoist the pilot signal and send the following message to S.U.Q. *Ismailia:* "Vessel's Name in Suez Roads ready to sail Please send Pilot thanks". In case of rough weather, the pilot boat leaves its station.

ANCHORAGE: Anchorage in the Port of Suez.

	Bearing of ship from Green Island Light	*Bearing of Green Island Light from ship*	*Distance from Green Island Light (cables)*	*Maximum Length of ship (m.)*	*(ft.)*	*Maximum draft (ft.)*
		Group "A"				
1 A	128	308	6.1	182.88	600	38
2 A	153	333	7.2	182.88	600	38
3 A	154.5	334.5	4.2	182.88	600	38
4 A	178	358	6.4	182.88	600	38
5 A	198	18	3.9	182.88	600	38
6 A	203	23	7.1	182.88	600	38
7 A	228	48	5.8	182.88	600	38
8 A	221.5	41.5	8.9	182.88	600	38
9 A	241.5	61.5	8.2	182.88	600	38
10 A	263	83	7.2	182.88	600	38
		Group "B"				
1 B	281.5	101.5	14.4	198.12	650	38
2 B	272.5	92.5	12.1	198.12	650	38
3 B	258	79	12.4	198.12	650	38
4 B	244	64	13.9	259.08	850	38
5 B	270	80	15.2	198.12	650	38
6 B	278	98	17.25	198.12	650	38
7 B	251.5	71.5	17.2	259.08	850	38
8 B	275	95	20.2	198.12	650	35
9 B	266	86	20.3	198.12	650	38
10 B	259.5	79.5	15.1	137.16	450	38
11 B	269.5	89.5	17.9	131.06	430	38
12 B	270.5	90.5	22.2	131.06	430	35
13 B	258	78	19.3	137.16	450	38
		Group "C"				
1 C	40	220	11.8	137.16	450	25
2 C	28.5	208.5	11.5	137.16	450	25
3 C	7.5	187.5	11.2	137.16	450	25
4 C	55	235	8.5	213.36	700	30
5 C	34.5	214.5	8.1	161.54	530	25
6 C	350.5	170.5	9.4	121.92	400	25
7 C	341	161	10.6	121.92	400	25
8 C	338	158	8.55	137.16	450	30
9 C	322	142	9.3	161.92	400	30
10 C	323	143	12.3	121.92	400	25
11 C	313.5	133.5	12.0	121.92	400	25
12 C	324	144	6.58	161.54	530	35
13 C	301.5	121.5	6.5	121.92	400	35
14 C	284	104	6.7	121.92	400	35
15 C	277	97	5.7	121.92	400	25
16 C	253.5	73.5	4.8	121.92	400	35
		Group "H"				
1 H	118	298	12.0	182.88	600	38
2 H	128	308	14.3	182.88	600	38
Adabiya Anchorage						
1	239	59	28.3	164.59	540	38
2	234	54	28.8	164.59	540	38

Radii of the turning circles of the Anchorages:

	Radius (m.)	(ft.)		*Radius* (m.)	(ft.)
	Group "A"				
1 A	274.32	900	6 A	274.32	900
2 A	274.32	900	7 A	274.32	900
3 A	274.32	900	8 A	274.32	900
4 A	274.32	900	9 A	274.32	900
5 A	274.32	900	10 A	274.32	900
	Group "B"				
1 B	289.56	950	8 B	289.56	950
2 B	289.56	950	9 B	289.56	950
3 B	289.56	950	10 B	213.36	700
4 B	350.52	1,150	11 B	198.12	650
5 B	289.56	950	12 B	198.12	650
6 B	289.56	950	13 B	213.36	700
7 B	350.52	1,150			
	Group "C"				
1 C	213.36	700	9 C	243.80	800
2 C	213.36	700	10 C	182.88	600
3 C	213.36	700	11 C	182.88	600
4 C	304.80	1,000	12 C	243.80	800
5 C	243.84	800	13 C	182.88	600
6 C	182.88	600	14 C	182.88	600
7 C	182.88	600	15 C	182.88	600
8 C	213.36	700	16 C	182.88	600
	Group "H"				
1 H	274.32	900	2 H	274.32	900
Anchorage for ships waiting to enter Adabiya:					
1	213.36	700	2	213.36	700

RESTRICTIONS: We reproduce hereunder Suez Canal Authority Circular No. 1/3T1-425004 dated 1st October, 1976 and updated by Circular No. 4751/T76 dated 13th October, 1976.

FIRST: Convoy Times:

(1) **From North:**

First Convoy N 1 Starts at 0200 hrs. and ends at 0600 hrs., direct to Bitter Lakes.

Second Convoy N 2 Starts at 0930 hrs. and ends at 1130 hrs. This convoy is to be moored at El Ballah Western Cut.

Vessels permitted to Join the second convoy:

Vessels up to 15,000 tons

Maximum draft 8.85 m. (29 ft.)

Maximum breadth for ships and floating units 30 m. (98 ft.)

Slow or damaged ships are to join this convoy providing their dimensions are within the limit shown above.

Number of vessels in this convoy are limited to the number of mooring berths available in El Ballah.

(2) **From South:**

One convoy starts at 0600 hrs. and ends at 1000 hrs.

SECOND: Following details and documents are required to be submitted:

(1) Masters are requested to *wire* at least 48 hours before vessel's arrival giving the following details:

Gross and net tonnage with date of last Suez Canal Tonnage Certificate.

Gross and net tonnage and date of last Registry.

Nationality, Owner's name, previous name if any, and category of vessel according to its registry, i.e. Cargo, Containers Ship, Lash vessel, Ro/Ro.

Has the vessel transitted the Canal before.

Has there been any damages in the ship. If no alteration the following message is to be sent "PARTICULARS NO CHANGE". Documents must be submitted in any case.

N.B. – Huge vessels which their transit necessitate the employment of tug escort, Suez Canal Authority must be advised at least 4 days before their arrival by telex, No. Sucan UN 2153.

(2) *Documents*

(*a*) Suez Canal Special tonnage Certificate.

(*b*) Ship's Registry.

(c) Statistical Declaration.
(d) Information concerning a ship extracted from its official documents and its load of containers or barges.
(e) Declaration of Double Bottom Tanks.
(f) Declaration concerning vessels in ballast.
(g) Declaration of Navigability.

THIRD: Conditions for vessels to join the convoys, times for registration and submission of documents:

(1) **From Port Said:**

First South Bound Convoy N1

(a) Vessel *in Port* and requires to transit the Canal must adhere to the following:—
Called the Pilot (by hoisting the Pilot Signal)
Having registered for transitting at the measurement office.
The required documents were submitted latest at:
2200 hrs. for vessels not previously transitted or have previously transitted, but due to alteration must be remeasured.
2300 hrs. for vessels previously transitted.

(b) Vessels entering the Canal directly from Sea must:
Arrive at the waiting area at Port Said anchorage not later than 2000 hrs. for New V/L's., 2200 hrs. for vessels which have previously transitted.
Have called the Pilot.
It is permitted for these vessels to be registered preliminary in the Measurement Office without submitting the documents from the time of her arrival at Port Said anchorage till 2100 hrs. for new vessels or in such condition.
2300 hrs. for vessels which have previously transitted, provided that these documents are submitted before the vessel passes in front of the Suez Canal Authority's building.

(c) Latest permissible time to hoist the Pilot Signal:
Whenever the vessel is berthing is 2300 hrs.

Second Southbound Convoy N2

(a) (1) Vessel *in Port* must:–
Have called the Pilot,
Have been registered in the Measurement Office,
Have submitted the documents latest:
At 0530 hrs. for new vessels or in such condition
At 0630 hrs. for vessels which have previously transitted.

(2) Vessels are considered in Port and can join the convoy:
Vessels arrived at the waiting area at Port Said anchorage.
Before 0330 hrs. vessels which have not transitted the Canal before or in such condition.
Before 0530 hrs. for vessels transitted before.
These vessels will enter the Port when traffic permits.
It is permitted to register these vessels preliminary at the Measurement Office, without submitting the documents from the time of her anchoring at Port Said anchorage till the latest permissible time:
0330 hrs. for new vessels or such vessels.
0530 hrs. for vessels transitted before, provided that documents are submitted within one hour and half from the official time the vessel entered the outer harbour limited by Hectometer 22, otherwise the application for transitting will be cancelled and the vessel will be delayed from the convoy.

(b) Vessels which are allowed to enter the Canal from Sea direct without stopping in Port must:
Arrive at the waiting area at Port Said anchorage not later than
0330 hrs. for new vessels or in such condition.
0530 hrs. for vessels which have previously transitted.
Application for transitting the Canal should be registered not later than:
0430 hrs. for new vessels or in such condition.
0630 hrs. for vessels which have previously transitted and documents submitted before the vessel passes in front of the Suez Canal Authority's building.

(c) Latest time permitted to hoist the Pilot Signal wherever the vessel is berthed is 0630 hrs.

(2) **From Suez:**

Conditions to join the Northbound Convoy:

(a) Latest time permitted to arrive at the waiting area at Suez anchorage:
Tankers group, and the following are considered as such:
(1) Car carriers
(2) Ro/Ro
(3) Containers
(4) Lash vessels
(5) Ordinary vessels with 35 ft. draft.
By 0000 hrs. for tankers not transitted before,
0100 hrs. for tankers transitted before.

Other Vessels:
0130 hrs. for vessels not transitted before, 0230 hrs. for vessels transitted before.

(b) Registering of application of transit at the Measurement Office:
Submitting the documents: Short time after anchoring of the tankers or other vessels.
Without submitting the documents: As stated above in Para *(a)*.

(c) Latest time permitted to hoist the Pilot Signal: As stated above in Para *(a)*.

MAX. SIZE:

Maximum dimensions and conditions of ships authorized to transit the Canal:

General:

(a) Maximum length of ships authorized to transit 1100 ft. (by length of ship it is meant the underwater length including bulbous bow).
(b) Maximum breadth 160.5 ft.
(c) The enclosed tables indicate the maximum draft authorized relative to the breadth of ship, speed and direction of transit. (See below).
(d) Ships transitting the Canal according to the the terms of this circular are required to fulfill the following conditions:
(1) The ship's loadline for tropical zones must be apparent and in compliance with the provisions of International Convention regarding loadlines.
(2) The ship's draft marks fore, aft and amidships will be existent on port and starboard sides.
(e) All ships have to conform to the Suez Canal Rules of Navigation and its Appendix for dangerous cargo.
(f) This circular cancels and replaces previous circulars concerning the maximum dimensions of ships authorized to transit the Canal, and our circular No. 2/6B5 – 422174 issued 23.6.1975 concerning transit of ships at a draft of 38 ft.

Escorting by Suez Canal tugs:

(a) Ships with length less than 1000 ft. and breadth less than 147 ft. can transit the Canal without escort tugs.
(b) Ships with a draft not exceeding 37 ft. fore, aft and amidships can transit the Canal without escort tugs.
(c) Ships with length less than 1000 ft. but breadth from 147 ft. to the maximum of 160.5 ft. are to be escorted by 1 tug during the first transit of Canal. If this transit proves successful the following transits will be without escort tugs.
(d) If draft exceeds 37 ft. and up to the limit draft of 38 ft. (fore, aft and amidships), the ship will be escorted by 1 tug for her first transit. If this transit proves successful the following transits will be without escort tugs.
(e) Ships with length of 1000 ft. and up to the maximum limit of 1100 ft. are to be escorted during the first transit by 2 tugs. If this transit proves successful the ship will be escorted by 1 tug only during the following transits.
(f) Sisterships are not to get benefit of authorisation granted to a particular ship of the group.
(g) Ships which are to be escorted by 1 or 2 tugs according this circular have to notify Suez Canal Authority at least 4 days prior to arrival to Canal zone.
(h) LPG/LNG Tankers whose Suez Canal gross tonnage exceeds 80,000 tons, either laden or in ballast must be accompanied by a Port Authority tug on every transit. It is also requested that a steering light, to be lighted by night, be fitted on the extreme of the tanker's bows.
(i) Vessels whose breadth ranges from 128 ft. – 134 ft. are exceptionally permitted to transit the Canal from South escorted by tug during their first transit of the Canal.

Draft for large ships in ballast:

The recommended draft for large ships in ballast is to be 25 ft. forward and 29 ft. aft. This draft may be amended to give the best view from the bridge, or better steering, but must not depass the maximum authorized draft according to the attached tables, and transit will be effected in good weather conditions.

Tables indicating the maximum draft for different breadths and speeds for ships:

Speed not exceeding 14 Km./H (From North or South):

Breadth (ft.)	113	116	119	123	126	130	133	138	143	148	153
Draft (ft.)	38	37	36	35	34	33	32	31	30	29	28

Speed not exceeding 13 Km./h. (From North or South):

Breadth (ft.)	120	123	127	130	134	137	142	147	150	157	160.5
Draft (ft.)	38	37	36	35	34	33	32	31	30	29	28

Special Transit

Speed not exceeding 13 Km./H. (From South):

Breadth (ft.)	128	131	134
Draft (ft.)	38	37	36

Exceptional Transit

Speed not exceeding 12 Km./H.

Breadth (ft.)	160.5
Draft (ft.)	29

We reproduce hereunder Suez Canal Authority circular No. 2237/T76 dated 31st March, 1976.

Recommended drafts for tankers in ballast when transitting the Suez Canal are as shown below:—

Tonnage S.D.W.		Draft	
From	To	Forward (ft.)	Aft (ft.)
120,000	230.000	25	29
100,000	120,000	24	28
80,000	100,000	23	27
65,000	80,000	22	26
50,000	65,000	21	25
32,000	50,000	20	24
23,000	32,000	18	22
15,000	23,000	15	19

N.B. These drafts may be amended, when necessary, to give better steering.

HEALTH: On entering, vessels must hoist the International Quarantine Signal for compulsory quarantine. Any sickness must be reported to the doctor specially when it is presumed that the sick will be hospitalised. The Quarantine doctor meets the ships whilst entering the port and the ships are boarded in turn. To get a quick clearance and not to be left for later attendance, Masters are requested to receive the doctors as soon as they board and to have the following documents ready:

Quarantine Forms in Duplicate: When inserting the ship's register net tonnage special care should be taken in indicating same on the 2 quarantine forms (Form No. 15 Q.A.) as the dues are calculated on that tonnage, as incorrect information may cause complications.

Deratisation Certificate should be handy for inspection.

Clearance from Last Port should also be handy.

All ports at which the vessel has called as well as dates of sailings for the last 30 days should be inserted in the form.

Quarantine Signals:

By day: "Q" flag (signifying vessel healthy). *"Q" Over first substituted (QQ).* (Vessels have cases of infectious diseases more than 5 days ago, and there have been unusual mortality among the ratings or crew on board.) *"Q" over L flag (QL)* signifying (vessel is infected and has cases of infectious diseases less than 5 days ago.)

By night: red light over white: The flags and lights must remain hoisted until free pratique is granted. Ships in transit under Quarantine through the Suez Canal will use the same signals until they clear the other end of the Canal.

Important: In the event of a vessel arriving from a port that has been internationally declared infectious and the incubation period has not yet expired at the time of the ship's arrival at a U.A.R. port the vessel is put under compulsory Quarantine, moored at an isolated berth and no shore contact is allowed. Nevertheless, the ship can still carry out her normal operations on condition that all shore personnel are holding valid vaccination and/or inoculation certificates issued by the Quarantine Administration. The ship's personnel should also carry International Vaccination and/or Inoculation Certificates. Final landing passengers, not carrying such certificates, will be landed under Quarantine supervision and will be kept isolated at the lazarette until incubation period is over.

Pratique granted by radio: Pratique may be granted prior to ship's arrival provided the following conditions are adhered to:

1. The vessel must be a regular liner to the Quarantine Authorities and has a doctor on board.
2. Details shown on the Quarantine Statement should be radioed to the Quarantine Authorities 24 hours prior to ship's arrival.
3. Captains of vessels must declare before their arrival any accidents, which might have taken place on board prior to the arrival in port.
4. The ship must not have called at any infected port.

RADIO: ETA messages can be transmitted to Agent and Suez Canal Authority through Port Said Radio and/or Alexandria Radio for vessels calling at Port Said. The same procedure can also be adopted for vessels calling at Suez through Kosseir Radio.

As a rule, Masters should send their ETA not less than 48 hours before ship's arrival. In addition to the ETA, all requirements should be included in the wireless message as well as detailed information regarding cargo operations, draft, number of passengers disembarking, details of their baggage and crew changes, if any. If the ship is operating a tour in the town and/or a quick trip to Cairo, numbers of participants must also be contained in the same wireless message. Number of bags of mail to be discharged, if any, should also be included.

This is to enable the ship's Agent to notify, in good time, the parties concerned, to prepare in advance the necessary custom permits, and to ensure all requirements to be supplied without delay.

Vessels transitting the Canal for the first time, should also include in the ETA message, whether fitted with a projector or not and if in the affirmative to state number electricians required, thus enabling the Agent to make the necessary arrangements and avoid any delay.

In accordance with the Suez Canal Authority's instructions and in order to avoid delaying vessels from joining the respective convoys, vessels transitting the Canal for the first time are required to include the following information in their ETA message:

Suez Canal gross and nett tonnages and date of last Suez Canal Special Tonnage Certificate.

Registered gross and net tonnages and date of last register. Ship's nationality and Owner's name.

If the ship has previously transitted the Canal, the following information should be included in the ETA message:

Whether there have been any constructional changes. If no changes have taken place, the following message should be sent: "Particulars no change navigable".

RADAR/VHF: There is no radar service at either Port Said or Suez, but VHF can be used with the Suez Canal Authority on Channel 16. Transit vessels can also contact S.U.Q. at Ismailia by wireless on the following frequencies: Freq. 454 kc/s., 425 kc/s., 468 kc/s.

TUGS: Highly qualified crew are available on board several tugs owned by the Suez Canal Authority in Port Said, Suez and in all Suez Canal stations. These tugs assist vessels to berth in Port Said harbour as well as in Canal if a case arises. It is left solely to the Canal Authority to decide whether more than 1 tug is needed (free of charge) to assist any ship to moor in the Port Said harbour, but if a Master of a vessel finds it necessary to employ an extra tug for berthing or if he needs a tug for any other reason, such an operation will then be charged against the vessel.

Salvage tug boats:

1. 3,000 h.p. *Mounir.*
2. From 3,500 to 5,000 h.p. *Antar.*
3. 6,500 h.p. *Mared, Shahm.*

Harbour tug boats:

1. 800 h.p. *Moein, Monkez, Montasser.*
2. 1,600 h.p. *Bori, Wakar, Chadid, Hout, Kirsh, Morgan.*

General conditions:

1. Hire is reckoned from the time of starting to raise steam and ceases when the tug returns to its depot.
2. The charges for "waiting" will not apply while the tug has to remain under full steam either for a long or short period, ready to proceed. These charges only apply while waiting for a long period and when the tug is able to bank fires while at the disposal of the client.
3. Fractions of hour will be reckoned as full hour.
4. Hire charges are increased by 10% when tug is used after official office hours, on Fridays or on public holidays.
5. Hire charges are increased by 50% when tug is used outside Canal waters.
6. Towing charges outside the territorial waters are agreed upon with the Authority.
7. This tariff may be revised every 3 months without notice.

BERTHING: *Port Said:*

Places or Names	*Number*	*Nos.*	*Length of berth*		*Length of vessel*		*Observations*
			(m.)	(ft.)	(m.)	(ft.)	
Black Berths	7	1 N	220	721	72	563	On the Eastern side of the channel
		2 N	190	623	152	465	
		3 N	270	886	216	709	
		4 N	205	672	157	515	
		5 N	220	721	172	563	
		6 N	225	728	172	580	
		7 N	230	754	182	596	
Navy House	6	1			61	200	
		2			61	200	
		3			101	330	
		4			168	550	
		5			168	550	
		6			168	550	
Cherif Basin	10				134	440	6 vessels West
					168	550	4 vessels West of the Navy House
Abbas Basin	10				122	400	North of the basin
					183	600	South of the basin
Hussein Basin	17				91 to 180	300 to 620	South of the inflection point North of the inflection point
E Berths (1)	4	1 E	325	1,066	268	879	
		2 E	280	919	226	742	
		3 E	250	820	202	662	
		4 E	220	721	172	563	
Isolated Berths	5	11	280	919	226	742	
		21	250	820	202	662	
		51	315	1,050	259	833	
North Basin	2	1 A	260	853	209	686	
		2 A	280	919	226	742	
Outer Harbour Basin	7	3 A	without limitation				Vessel heading 270°
		4 A					
		5 A					
		6 A					
		7 A					
		8 A.N.					
		8 A.S.					
	5	3 A	......		28	270	Vessel heading 090°
	5	4 A	......		107	350	Vessel heading 090°
		5 A					
		6 A					
		8 A.S.					
Blocks Basin	10				122	400	Max. draft 9 m.
Red Berths	7	0 N	140	459	92	301	On the Western side of channel
		1 R	245	804	195	642	
		2 R	229	755	184	592	
		3 R	273	896	219.5	720	
		4 R	295	968	239	785	
		5 R	284	813	198	850	
		6 R	280	919	226	742	

Note: In good weather the length on buoys may be increased from 3 to 9 m. according to the length of the berth and height of the vessel.

Quays at Port Said: The Suez Canal Authority had built new quays to enable vessels to berth alongside at Cheriff and Abbas Basins. Length about 1300 m. Height about 2 m. from sea level. Also 14 cranes of 3 tons lifting capacity each, running on rails have been installed. Maximum draft allowed is 27 ft. The best part of these quays is ready and vessels with full cargo for discharge, are now berthing alongside. Vessels drawing more than 27 ft. have to lighten their cargo into lighters to that draft before berthing.

The distance between Bollards 23 and 24 South of deep Abbas Quay (30 m.) has been reserved for the berthing of one Ro/Ro vessel by the stern, within the present allowed draft (27 ft.).

Height of quay from sea level: 2 m.
Average tide all year: from 40 to 50 cms.
Thickness of fender: about 50 cms.
Breadth of quay edge: from 50 to 60 cms.

Suez:

Port Ibrahim: Port Ibrahim is the port of Suez. It consists of North and South basins.

North Quay: The North basin has, on the North side, a quay length of 2,415 ft. a total breadth of 975 ft. and depth of 26 ft. 06 in. at high tide. Quay is connected with the railway which runs the whole length of this quay and which can accommodate 4 large ships.

Berths 4 and 5 where stores are available are suitable for loading and discharging cement in big quantities.

Khedivial Quay: Berths Nos. 9, 10 and 11, length 119 ft., depth 24 ft. at high tide.

N.B. No cranes are allocated to these quays but mobile cranes (5-15 tons) only can be used.

Pilgrim's Quay: (Pontoon Berth) No. 6, 1 berth, length 500 ft., depth 24 ft. at high tide.

Adabiya Quay: This quay is situated on the Western shore of the Suez Bay, and is under the control of the Naval Authorities. The max. draft is 26 ft. 06 in. and can accommodate 4 large vessels. Quay is equipped with an electric crane, capacity 15 tons, max. length of vessel allowed to berth alongside quay 425 ft.

Marakib Quay: Situated at the entrance of the Canal depth 28 ft.; can accommodate passenger and cargo vessels.

Storage Capacity at Suez:

North Quay	40,150 sq. ft.
Pilgrims Quay	20,952 sq. ft.
Khedivial Quay	8,448 sq. ft.
	69,550 sq. ft.

While stacking spaces on the quays are: 332,050 sq. ft.

STEVEDORES: As stated in the ETA messages, Masters are advised to include in their messages details of cargo to be discharged in either Port Said or Suez, hatch by hatch and gangways required, if possible. All loading and discharging operations in Port Said harbour and Suez Roads are effected by lighters. There are steel lighters, wooden barges and self-propelled barges available for this purpose that will allow rapid work to be carried out. At Port Said several frozen cargo ships are provided with flat floating pontoons to facilitate discharge of cargo. At Port Said the draft of water does not allow ships to be berthed alongside quays to carry out cargo operations except in Cherif and Abbas Quays which accommodate vessels up to 27 ft. and consequently same are carried out also from and into lighters which are brought alongside the vessels whilst at anchor.

MEDICAL: It is very essential for Agent to receive advance notice of required medical attendance at least 24 hours prior to ship's arrival. All ordinary medical supplies are available and prescriptions are executed at any time at moderate prices and delivered during ship's stay in port. Medical assistance at Port Said and Suez is available. Consultations on board could be arranged through ship's Agent at any time by day or night. Reliable dentists are available at Port Said and could be consulted on board, if necessary, and during the following period at their clinics: From 0900 to 1300 hrs. and from 1600 to 1900 hrs.

Occulists are available for consultations at town clinics in Port Said during usual working hours. Opticians are also available at Port Said. The following hospitals are available with ample first, second and third class accommodation, accepting patients irrespective of nationality at reasonable charges:

At Port Said	*At Suez*
Al Mabarra Hospital	Al Helal Hospital
Notre Dame de la Deliverande Hospital	Abou El-Azayem Hospital
Two General Government Hospitals	General Government Hospital
T.B. Hospital	Isolation Hospital
Isolation Hospital	Ophthalmic Hospital
Ophthalmic Hospital	

Ship's personnel should carry international vaccination and/or inoculation certificates if a vessel is arriving from a port that has been internationally declared infectious and the incubation period has not yet expired at the time of arrival.

TANKERS: There is a bunkering station at Port Said harbour which can accommodate 4 tankers with not more than 38 ft. for the purpose of discharging their cargo of fuel or diesel oil to the different oil bunkering companies, but the petroleum basins for tankers at Port Said is as follows:

7 jetties can accommodate vessels with max. length of 555 ft., loaded with draft of 26 ft. 6 in.

If jetties 2 and 4 are occupied by large tankers, then No. 3 would have to be used by a small tanker.

Oil Storage: There is ample tank storage for bulk petroleum products.

New Suez Terminal: The terminal is situated in Suez Roads.

(1) Presently one berth has been reconstructed and is used by tankers chartered by EGPC.
(2) Minimum depth of water at L.W.O.S.T. in the approach Channel is 38 ft.
(3) Minimum depth of water at L.W.O.S.T. alongside each berth is 38 ft.
(4) Maximum safe length of tanker applicable 750 ft.
(5) Has six pipe lines each berth:–
    4 lines × 20 ins.
    2 lines × 16 ins.
    1 line × 4 ins. (fresh water)
(6) All types of oil products can be handled at this berth.
(7) No facilities are available at present for reception of ballast.

FRESH WATER: Is available for supply ex self-propelled barges to any quantity required at all times with a min. supply of 50 tons.

FUEL: Different grades of fuel oil are available from different firms. It is customary that the Master should advise in his ETA message of the vessel's requirements, fuel or diesel oil, at least 24 hours prior to ship's arrival into port. Bunkering is by contract between the Owners and the different bunkering firms, and nominations should be arranged for each vessel separately between the Owners and Head Office of the bunkering firm abroad, and for which payment is also effected abroad. Only the Compagnie Orientale des Petroles accepts payment in cash out of Shipping Account No. 2 for supplies effected by them and in which case a nomination is not required. Vessels can be berthed in the oil installation and thus can effect their bunkering requirements through pipe-lines. Tankers which are not gas-free, cargo vessels carrying dangerous materials and passenger vessels, which are moored opposite the town, can be supplied with requirements of fuel and diesel oil ex self-propelled barges with max. capacity of 700 tons.

FIRE PRECAUTIONS: In accordance with the Suez Canal Authority's regulations, tankers and vessels carrying dangerous materials must comply with their requirements, concerning fire regulations.

GANGWAY/DECK WATCHMEN: In both basins Cherif and Abbas at Port Said, where cargo vessels are normally berthed, ships' gangways can be used for disembarkation and embarkation. Passenger vessels are moored in special berths, i.e. Red Buoys, opposite the town, and can be supplied with 1 or 2 floating bridges (snake pontoon) which can connect the ship with the shore to enable the transit passengers and members of crew to proceed ashore. Cargo ships and other vessels mooring at the different buoys must lower their gangway to facilitate disembarkation and embarkation of ship's personnel as well as different officials. As far as Suez is concerned, all vessels must lower their gangway for the same purpose stated above. A deck watchman is recommended.

OPENING/CLOSING HATCHES: In accordance with Charter Parties, the opening and closing of hatches are dealt with as instructed in this Agreement, but for vessels carrying out minor cargo operations, it is customary that stevedores open and close ships' hatches against ships' account. To expedite vessel's transit, it is always recommended that ship's crew, during vessel's entering into the harbour should open the hatches and rig ship's derricks in order that they may be ready for cargo operations immediately upon ship's arrival at either Port Said or Suez.

CERTIFICATES:

Ship's Register.
Suez Canal Special Tonnage Certificate.
General Arrangement and Capacity Plans.
Load Line Certificate.
Safety Equipment Certificate.
Radio Safety Certificate.
Documents covering names and ratings of ship's officer and their diplomas.

CUSTOMS ALLOWANCE: Every member of crew is entitled to have 1 carton of cigarettes, 8 ounces of tobacco, and 1 bottle of spirits for his own consumption during ship's stay in Port Said, Suez Canal transit, until vessel exits the Canal or vice-versa. Same applies to passengers, and a limited quantity of bonded stores can be permitted in public rooms and bars on passenger ships. Crew and passenger list, in duplicate, showing the amount in possession of each must be ready on vessel's arrival for submission to the Customs Representatives who normally proceed on board on arrival to seal up the Bonded Stores.

CARGO GEAR: These are normally supplied by the stevedores to comply with the nature of cargo discharged or loaded from cargo ships. Rope lengths and other cargo gear may be additionally required to expedite ship's discharge.

IDENTIFICATION CARDS: Every member of crew must have a seaman's book deposited with the Officer in charge for inspection, if so required by the Immigration Authorities. If a vessel is stopping in Port Said or Suez for a lengthy time, these seamen's books are normally taken off the ship by the said Authorities and kept in their departing office pending ship's sailing day when they are placed on board by the proper officer on a previous advice. Identity cards are also needed if a crew member wishes to proceed ashore for a short visit to the town or for proceeding to any excursion inland.

CONSULS: The following countries have Consulates or Consular Agencies in Port Said:

U.S.S.R.
U.S.A.
Italy
Greece
West Germany
Panama
Republic of China
Holland
Norway
Denmark
Finland
Sweden
Spain
U.K.
India

REPAIRS: Most types of repairs whether temporary or permanent can be carried out here by the Suez Canal Authority's shipyard or its subsidiary companies, under the supervision of the appropriate surveyors, if necessary. Suez workshops are well equipped for undertaking all kinds of marine repairs to hull, main and auxiliary engines, boilers, navigation aids, radar and cooling, and installations.

Vessels carrying explosives are not allowed to carry out repairs. Tankers loaded or in ballast but not gas free are not allowed to carry out repairs, except in cases of force majeure of which the Canal Authority is sole judge. Gas-free tankers must present Gas-free Certificate before they are allowed to carry out any repairs. If unavailable, a chemist approved by the Suez Canal Authority can be appointed for testing the tanks and issuing the Gas-free Certificate. The aforementioned restrictions are applicable at Port Said only and not at Suez where vessels anchor at roads and are of no danger.

Other Repairs Facilities: Exist at Port Said for air conditioning, wireless telegraphy, radar, course and rudder recorder, refrigerators, and refrigerating units.

All kinds of repairs to echo sounding devices are carried out at Port Said by experienced specialists at reasonable charge, for the different types and dealt with by the Port Said Engineering Works with the exception of Raytheon radar, B.T.H. radar and Cossor radar which are represented by the Eastern Electronics.

DRY DOCKS: A floating dock of 25,000 tons, capable of docking vessels up to 50,000 d.w.t., is available at Port Said as well as a dry dock at Suez. Sufficient notice is required to book the date for either the floating or the dry dock.

Repair facilities are available at Suez, where a dry dock is suitable to accommodate vessels up to 8,000 d.w.t.

Dimensions:

Extreme length to inner sill	464 ft.
Breadth at entrance	73 ft.
Height of water over keel blocks:	
at Spring tide	22 ft., for., 26 ft. 3 in. aft
at Neap tide	19 ft., for., 23 ft. 3 in. aft

The max. draft at which a vessel can use the dry dock is 17 ft. for. and 20 ft. aft. Deeper drafts may be arranged with the management.

The Suez Canal Authority's Floating Dock and Shipyard is situated at the Northern entrance of the Suez Canal, opposite to Port Said lighthouse.

Ships up to 50,000 d.w.t. may undergo all kind of repairs in the shortest possible time. Tankers, by gas-freeing during their voyage from their home harbour to Port Said, will save at least 4 days if they carry out their repairs in our dock.

REPATRIATION: It is quite common that crew changes can be effected without any hinderance. As regards "signing off" members of crew, necessary facilities are given by the Immigration Authorities for their landing by granting them emergency visas and thus their repatriation arrangement by sea or by air can be effected easily. The "signing on" of foreign seamen is subject to the following regulations:

(a) A seaman and/or officer (non-residents) must be of the same nationality of the ship when arriving from abroad for this purpose.

(b) If a ship requires any rating, priority to engage Egyptian crew is given, unless indicated otherwise by means of a telegram or a letter from the ship's Owners abroad.

AIRPORT: The distance between the international airport at Cairo and Port Said or Suez is normally 2.5 hours. International airlines serve this airport. Cairo Shipping Agency is on constant contact with Agent for the necessary instructions.

In the interest of all and in order not to lose any time and to avoid any restrictions when sending crew members by plane to join their respective vessels, it is essential that the Agent concerned should notify by cable in good time the flight number as well as the time and date of the arrival in Cairo, thus enabling the Agent to notify Cairo Shipping Agency for the necessary clearance and as to whether they should be sent to join their vessels.

TIME: GMT plus 2 hours.

HOLIDAYS:

General Holidays	Year: 1977
Date and Month	Name of Holiday
February 22	Unity Day
March 2	Mouled el Nabi (Birth of the Prophet)
March 8	Syria-Revolution Day
April 11	Sham el Nessim
May 1	Labour Day
June 18	Evacuation Day
July 23	Revolution Day
September 1	Libya – Revolution Day
September 14/17	Ramadan Bairam
October 6	Armed Forces Day
November 20/24	Courban Bairam
December 12	Mohammedan New Year

The Dates of the Islamic holidays are stated approximately. Working hours: 06.00–1800 hrs. Overtime: 18.00–06.00 hrs. Friday is the weekly day of rest but it does not affect labour.

If a holiday falls on a Friday it is possible that the following working day will be decreed a holiday also.

Ramadan: Thirty days' fast and how it affects labour; Cargo operations can be carried out at night and on Fridays and General Holidays against payment of overtime rates. Arrangements should be made on the previous working day to enable Customs to delegate the necessary personnel in time.

Local Holiday

Port Said:	
December 23	Port Said Day
Suez:	
October 24	Suez Day

POLICE/AMBULANCE/FIRE: Vessels which are moored in the harbour either in Port Said or Suez requiring assistance from the Port Police, should hoist the International Code Signal (Y.M.). There is always a police guard appointed by these Authorities on each ship in either Port Said or Suez harbour. First-aid assistance can provide ambulances at a request through the Agent. In case of fire on board when in port, the Captain must inform the Port Authorities (the Suez Canal Authority) immediately and at the same time give a general warning by means of a long blast of whistle or siren and be prepared to move his ship to another berth if so required. The Suez Canal Authority own 7 tugs and other craft distributed in various points of the Canal with individual output from 10 to 950 t.p.h. well equipped with fire-fighting appliances, ready for use at any moment.

TELEPHONES: There are no telephone facilities available in Port Said except at berth No. 4 Red where passenger ships are normally berthed, and this can be connected when snake pontoon is fixed with ship's gangway.

SERVICES: Port Said and Suez being situated at a middle point between the East and the West, have become an ideal centre for replenishing stores and provisions which can be obtained in bond or from town. The chandling firms attending to all ships calling at A.R.E. ports are:

(a) The United Arab Marine Contracting & Supply Co., (cable address: "Consup").

(b) The International Marine Services Co. (cable address: "Marinco").

Delivery of provisions and stores is effected 24 hours a day at Port Said and Suez.

It is recommended that Masters should order their requirements prior to their arrival with a view to avoiding any delay specially for ships joining the 0700 hours convoy Southbound.

Deck and engine stores are ample and are also available and sold at (in bond) prices.

Paints: All kinds (bottom, boot-top, topside, enamel, engine ready mixed, heat resisting, varnishes) are also available at "in bond" prices. Painting of ships or undertaking any maintenance work on board is permitted while ship is in port waiting to join the North or the Southbound convoys as well as while transitting the Suez Canal.

The following companies are represented here:

International Marine Paint	Represented by The United Arab Contracting Co. (cable address: "Consup")
Hemples Marine Paint Campex Marine Paint Wiederhol Marine Paint	Represented by The International Marine Services Co. (cable address: "Marinco")

Chemicals: The following chemical firms are represented in Port Said and Suez:

Gamlen & Co.	Represented by The United Arab Contracting Co. (cable address: "Consup")
Bird Archer/Norus (Tommons & Chartes) Chemicals. Drew Chemicals Cameroid Products. Paroline Chemicals Cameroid Products. Walker Bow.	Represented by The International Marine Services Co. (cable address: "Marinco")

Grease and lubrication oils. Available from:

Esso Petroleum Co.
Misr Petroleum Co. (ex Shell)
Mobil Oil Co.
Caltex Oil Co.
Ocean Oil Co.
Wisure Oil Co.
Fina Oil Co.
Gulf Oil Co.
Castrol Burma Oil.

An advance notice of 48 hours is necessary to arrange for lubricating oils and/or bunkers required.

Charts: Admiralty Charts are available at Port Said only from the United Arab Marine Contracting & Supply Co. If any order has to be supplied at Suez, arrangements can be made for the required charts to be sent there.

Cigarettes: American and British cigarettes are available "in bond".

Technical Gases: Technical gases are also available at Port Said and Suez, and empty containers can be exchanged.

Fish: Bream, prawns, crab, rock fish available throughout the year; Mullet available June/February; Slip soles available November/March.

Vegetables: Beans, beetroots, cauliflower, cabbages, carrots, eggplant, endive, garlic, herbs, lettuce, marrows, parsley, radishes, spinach, tomatoes, turnips, escarole, onions, potatoes: *available throughout the year.*

Green peas, celery, pumpkins: *available January/March.*
Artichokes: *available October/April.*
Parsnips, spring onions: *available November/May.*
Green pepper, mint, lady's finger: *available June/September.*
Capsicum: *available May/December.*
Cucumber: *available February/December.*
Lemons, limes: *available throughout the year.*
Fresh figs, fresh dates: *available August/October.*
Bananas: *available October/June.*
Grapefruits, oranges, tangerines, *available October/May.* (When out of season import citrus are available).
Apricots: available May/June.
Water melons, sweet melons: *available May/October.*
Grapes: *available June/October.*
Plums, peaches: *available June/October.*
Mangoes: *available August/September.*
Pears: *available August/October.*
Apples: *available November/February* (also imported the whole year).

Eggs: Eggs are available throughout the year.

Meat: Fresh meat is only supplied to vessels having a Mohammedan Crew after permission is obtained from the Customs. Other vessels are supplied with "frozen" in bond.

Laundry: Well equipped, reliable and fast services are available at Port Said, through the ship's contractor. Ship's laundry is usually delivered within 24 hours. For vessels remaining a few hours in Port Said and transitting the Canal, their laundry could be collected, washed and ironed and then transported to Suez by special car or lorry for delivery to them there.

Garbage: No refuse or ashes are allowed to be thrown whilst ships are moored in Port Said, transitting the Canal or in Suez Roads. Small barges are available in Port Said and Suez for disposal of garbage or ashes, which craft can be obtained at a reasonable hire.

Motor Launches and Tugs Hire: Motor launches and tugs required for extra service are charged for as under:

At Port Said:

Motor launches per hour at day time, pt. 60 each; night-time, pt. 75 each; motor launches per day, pt. 300 each; night, pt. 450 each.

At Suez:

Motor launches per hour, pt. 1,250 each; tugs per hour, pt. 5,000 each.

Divers: Suez Canal Authority's Divers as well as other Contractors' experienced divers are available, capable of carrying out any kind of underwater repairs including welding and fees are subject to the kind of job to be performed. Anchors and other articles left behind by any ship in Canal waters are retrieved on no cure no pay basis.

SHORE LEAVE: Crew members are allowed ashore provided that they obtain a shore leave pass issued by the Immigration Authorities through the local Agent. They can proceed ashore by means of motor launches or rowing boats at their own expense. For vessels mooring opposite the town and connected with the shore by snake pontoon. Crew, together with passengers, can proceed ashore free of charge.

REGULATIONS: As Port Said and Suez are considered the leading ports to the Suez Canal, the Suez Canal Authority has established a convoy system for vessels transitting the Suez Canal.

It is important that the timings indicated are to be complied with. However, it is recommended that Masters arrive half an hour earlier to eliminate the possibility of their vessels being delayed on account of alleged late arrival at the pilot station or being considered as having anchored at an area away from the pilot station.

Conditions of Transit: Each vessel must be provided with a projector, either its own which should be in compliance with the Canal Authority's regulations, or a hired one obtainable from the Suez Canal Light Company. In case of hire, 2 electricians will be provided and the vessel is to supply them with food and accommodation.

2 or more mooring boats will be provided with a crew consisting of 3 men for each, to assist the vessel in mooring in the Canal when required. A sheltered place or accommodation, as well as food has to be provided by the ship.

Connecting links made fast to bitts or clinched on board should be hung over the vessel's side.

Wireless watch should be kept in accordance with the indication of the Pilot. The Authority's station S.U.Q. transmits on a frequency of 420 kc/s. (714 m.) Vessels communicating with S.U.Q. must transmit on a frequency of 425 kc/s. (841 m.).

Canal Pilots will be supplied with a wireless telephone to facilitate the despatch or receipt of messages. These sets require a direct current of 6 volts and special sockets according to the dimensions stated below, and which should be installed on the bridge within reach of the Pilot. The potential difference at the socket must not be less than 6 volts. The socket must withstand a current of 5 amps.

The socket's dimensions are as follows:

Diameter of each female	4 mm.
Length of each female	18 mm.
Distance between the two females	12 mm.

In the event of such sockets and/or the required current not being available, the telephone will be accompanied by a battery, at vessel's expense. Each vessel should be equipped with: *(a)* Rudder Angle Indicator, *(b)* R.P.M. Indicator.

According to Article 15 para. 2a of the Suez Canal Rules of Navigation, the above appliances must be fitted on the bridge in such a position that the Pilot may read both, without having to move away from his situation. An exemption to the above requirements is granted to vessels having a Suez Canal gross tonnage of less than 2,500 tons (excluding spaces not permanently added to the gross tonnage) and to ships not passing through the Canal more than 3 times a year.

Pilot Signals:

By Day: International Code Flag "G" under a black ball, (for entrance in Suez Basin, only "G" flag).

By Night: 3 white lights vertically hoisted, which must be clearly visible from the watch tower of the Suez Canal Authority's offices.

DEVELOPMENTS: Since the nationalisation in 1956 of the former Suez Canal Company, several improvements have taken place to facilitate transit and to accommodate larger ships. A by-pass between Kantara and Ferdan of about 9 km. in length exists to enable Northbound vessels to pass Southbound ships. The max. draft allowed presently in the Canal is 38 ft. for Northbound vessels only. The Suez Canal Authority is undertaking a project to be accomplished by 1978 aiming at increasing the Canal cross sectional area to 2,500 sq. m., so as to allow the transit of vessels with a draft of 48/50 ft. and a beam of about 135 ft. Same draft will be applicable to both Port Said and Suez and at the same time, as the project is being accomplished.

Plans have been confirmed to extend the capacity of the Canal to accommodate tankers of up to 150,000 d.w.t. Completion date of the work involved is presently uncertain. Additional plans call for further extension allowing transit of loaded tankers up to 300,000 d.w.t.

SHIPMASTER'S REPORT No. 1: *Suez Canal Transit (South/North) (1976)*

C. Guardafui light was clearly seen and identified at a range of 39 miles.

There was an oil rig operating Southwards of the Cape in approximate position 11° 44′ N.: 51° 21′ E.

The Straits of Bab El Mandeb were congested but the traffic separation scheme seems to be satisfactory. The passage of the Red Sea does not seem to be any different from the past.

When passing Aden, a preliminary message was sent to the Suez Agent. This was of doubtful value but it is advisable to send a message addressed to 'Port Authorities Suez', via station SUK, giving the following information:–

Ship's name and flag.
Whether transit of canal is desired.
Destination.
Where from.
Cargo aboard.
Whether any dangerous cargo carried.
Draft
ETA at – 23° North, Straits of Gubal, Suez.

All radio messages through the Egyptian radio stations must have a signature, i.e. 'Master'.

The ETA's can be updated as necessary. The message to the Port Authorities is mandatory.

Approaches: The Gulf of Suez is congested by oil rigs – particularly in the vicinity of Ras Shukheir and the Ramadan and July oil fields where there are many rigs and flares and supply vessels crossing the Gulf. One oil rig was working in the middle of the fairway East of Ras Dib. With poor visibility, if a Southbound convoy were to be met in this region, it might be wise to proceed at manoeuvring speed.

Most of the lights in the Gulf are extinguished but Newport Rock lighthouse, the buoys and other lights in Suez Bay are working and are efficient.

A pilot cutter operates just South of the waiting area but an approaching ship will be called by signal lamp from ashore, asking for the ship's name and making "VHF". Contact is then established on Channel 16, changing to 6 when the ship will be told whether to anchor in the waiting area or remain under weigh until the Pilot boards.

Pilotage: The Pilot boards from a launch by means of the accommodation ladder (which should be lowered to within 3 ft. of the water) and takes the ship to her designated anchorage in Suez Bay.

Arrival Formalities: Quarantine and Customs authorities (about 8 people) board the ship at the anchorage together with the Agent. The accommodation ladder is used for all boarding and disembarkation within the canal. It should be raised when not actually in use otherwise the ship will be boarded by numerous "Businessmen".

A list of forms required is listed below but there are others which the various authorities bring with them and some are presented for filling in more than once and by different officials. This ship's transit was delayed because the Agents had not received funds from London. Deck log books for the past six months have to be landed.

The Suez Canal Cargo Declaration Form (in duplicate) is handed to the Pilot who disembarks at Ismailia.

At Anchor: With 3 shackles out, this ship lay comfortably at A8 berth. Some difficulty, however, was found in reconciling the various anchor bearings with the chart.

A bumboatman will seek permission to set up shop aboard. Care should be taken to agree methods of payment beforehand.

A listening watch should be kept for Suez Control on Channel 6. Water can be ordered through the Control and will be delivered in a large water boat carrying about 300–400 tonnes. Rate of delivery is about 50 t.p.h.

Convoy lists are made out at about 0300 hrs. and ships can call Suez Control soon after that to learn their convoy number and time of Pilot boarding. Convoys can start as early as 0500 hrs. This vessel was number 10 and hove up at 0830 hrs. Our searchlight was brought out at 1700 hrs. and the boats at 0500 hrs. We were asked to carry 4 extra boats but Pilots advise against this as the time taken to unload 6 boats can cause delay at the other end of the canal.

Transit: There seems to be no change in the transit of the canal. The Pilots change at Ismailia. The convoys cross in the Great Bitter Lake, anchoring as necessary. There is now one convoy from each end every day.

A Harbour Pilot takes over on reaching Port Said and, as soon as the searchlight and boats have been off-loaded and the ship has entered the approach channel, he disembarks.

The Agent will board at Port Said with yet another form to be filled in and he will return the log books.

Documentation:

2 Health Forms (Egyptian)
1 Passport Form (Egyptian)
1 D.B. Tank Statement (Egyptian)
1 Radio Frequencies Form
2 Cargo Declarations
*4 Cargo Manifests
8 Crew Lists

Plus several others which will be produced by the various officials.

* It was explained that our company's vessels do not carry cargo manifests but the Agent said that a typed statement of the amount of cargo aboard, destination and where loaded would suffice.

SHIPMASTER'S REPORT No. 2: *Suez Canal Transit (South/North) – (1976)*

After clearing Aden a radio message was sent to the Port

Authorities Suez via Port Said Radio advising them of the following:—

Ship's name and flag.
Whether desire transit.
Destination and last port.
Cargo aboard total tonnage and type of cargo.
Whether dangerous or explosive cargo carried.
Draft.
British tonnages gross and nett.
Date Suez Canal Certificate issued.
Tonnages gross and nett from Suez Canal Certificate.
Advice as to whether searchlight required.
ETA's 23° North Straits of Gubal Suez.

During the passage in the Red Sea both Port Authorities and Agents received up-dated ETA messages. When using SUK radio to give up-dated ETA this station advised that a cable was necessary to be sent to Port Authorities Port Safaga via SUK giving ETA Strait of Gubal.

Navigation in the Red Sea does not seem to be any different from the past. The Traffic separation scheme in the Straits of Bab El Mandeb seems satisfactory.

Straits of Gubal and passage in the Gulf of Suez was in daylight. Especially in the Straits of Gubal very few seem to adhere to any form of traffic separation scheme. There is no doubt that if it were night time or poor visibility then it would be advisable to be on 'Stand-by'. There is now an oil rig 27° 57′ N., 38° 41.2′ E., or 349°, 5.7 miles from Ashrafi Lt. Ho.

The Ramadan and July Oil Field area has many oil supply ships, most of the Southbound traffic was met in the Straits of Gubal thus further North it was very quiet.

The ship was anchored in the waiting area South of Newport Rock but alas this area shown as being to the East of the 2 green flash buoys is *now wrong!* The waiting area is to the S.E. of the most Southern Green flash buoy. About 1 mile South of the previous position. Evidently there is shoaling in the old area and ships have grounded.

On arrival at the waiting area the ship had to anchor as the Southbound convoy was clearing. A tug with Pilot Signal closed the ship to ask for information with regard to tonnages, cargo etc. After first vocal contact Channel 6 VHF was used. The ship was not called up by lamp nor did the Port Control answer any VHF requests etc. It would seem that if the Tug is on station advice is received from there. They did not, however, attempt to advise the ship that the waiting area had been altered.

As the ship anchored a boat came alongside with two watchmen but as I had not requested these and the visitors had not boarded they were sent ashore.

Later a Pilot boarded via the accommodation ladder to shift the ship from the waiting area to a designated anchorage, in our case '1B'. Ship was anchored in '1B' by 0030 hrs. on 12th, having arrived at the waiting area at 1947 hrs. on the 11th.

As the ship had some essential repairs to the main engine which would only take a short time, engines were immobilised. Pilot had advised that 0800 hrs. would be earliest time for transit. During the middle watch the area was hit by a fierce short lived blow from a Southerly direction. Although the vessel did not drag, ships close by did. It was necessary to pay out more cable to ensure a bulk carrier cleared us comfortably. During this time a ship called Port Control to say they had dragged some 3 to 5 cables.

As the weather for some 3 hours was considered bad for small boats the first of the visitors did not board until 0515 hrs.

The Canal Surveyor, who was the first to board was quite helpful and pleasant. He took the Suez Canal Tonnage Certificate for verification as the ship was making a first transit. This I have been informed will be returned to the Company in about 2 months.

Later other officials boarded about 0700 hrs. The Agent also came off with the mail. The 2 electricians for the searchlight insisted on being given a cabin or they would not remain on board. As there was no spare cabin, except one in the crew accommodation, I endeavoured to explain that a reasonable shelter had been built on the after end of No. 2 hatch. It transpired that in the end I moved a patient who had tonsilitis out of the hospital. Later the Canal Pilot informed me that the electricians can not be so demanding provided a reasonable shelter is provided.

Documentation was found to be as advised in the report above. One small difference is that the Cargo Declaration form is only required as 1 copy and is now in English with one form for South to North ship's and another for North to South ships.

At the moment there is only the 1 convoy each way per day. Hours of commencing transit seem a little doubtful. I gather that first Southbound ship leaves Port Said at 0200 hrs. while the first Northbound ship now leaves Suez at 0800 hrs.

Searchlight and 2 boats were brought alongside and loaded in ample time prior to the Canal Pilot boarding at 0909 hrs. I gather that because of the 'bad' weather for those few hours the delivery of searchlights and boats was delayed. Also no advice was obtainable on the VHF after 0300 hrs. with regard to convoy number or time of proceeding. About 20 minutes notice was given over the VHF.

The Transit was quite straight forward. Ship was anchored in the North Anchorage, Bitter Lakes for 3.5 hours, the Southbound convoy passing. Transit was commenced at 0947 hrs. At Ismailia the Pilot changed. He took the Cargo Declaration with him.

Port Said was reached at 0033 hrs. on the 13th. The Sea Pilot boarded here as did the Agents who returned the Ship's Register and Log Books which had been landed at Suez. The ship had to keep moving while the boats and searchlight and personnel were either off-loaded or disembarked. At night this is not easy and the whole crew are required to ensure a safe and quick operation. Once these matters were completed the Sea Pilot left well within the breakwater. Accommodation ladder was used at all times for Pilots, Officials and Agents boarding and disembarking. Fairway Buoy was abeam at 0148 hrs. on the 13th.

On the Eastern Banks of the Canal there is much work being done with levelling ground and widening the canal. Also in the Little Bitter Lake. *According to the Pilot 2 convoys from North will be put into operation in about 1 month.*

AUTHORITIES: The Suez Canal Authority is the Authority governing Port Said harbour as well as Suez Bay.

AGENCY: As far as reception of ships and their transit of the Suez Canal. The Suez Canal Shipping Agencies Company is responsible for shipping companies in Canal Zone, Suez Gulf and A.R.E. Red Sea ports, through 4 branches at Port Said for each of which there is a branch at Suez and 1 in Cairo. Their names are:

Canal Shipping Agencies Company, Port Said. 26 Palestine Street, P.O. Box 262. Telephones: 8164/65 – 8174–8602/4. Telegrams: CANASHIP. Telex: 92275 AGEN UN.

Branches:

Assiut Shipping Agency, Port Said. 9 Mostafa Kamel Street, P.O. Box 128, Telegrams: ASSIUSHIP. Telex: 54262 ASUT UN. Telephones: 2722, 8070.

Asswan Shipping Agency, Port Said. 7 El Goumhouria Street, P.O. Bag. Telegrams: SWANA. Telex: 54261 SWAN UN. Telephones: 3194, 3195, 3196, 3521/23.

Damanhour Shipping Agency, Port Said, 40 El Goumhouria Street, P.O. Box 126. Telegrams: DAMANSHIP. Telex: 54264 DAMA UN. Telephones: 2951/53–3014, 3024, 3027.

Assiut Shipping Agency, Suez, 1 Abdel Khalek Street, Abou Ghabban Building. Telegrams: ASSIUSHIP.Telex: 54187 SUAG UN (Attention ASSIUSHIP). Telephones: 2790, 3025.

Asswan Shipping Agency, Port Tewfik (Suez), 1 El Gueish Street, P.O. Box 4. Telegrams: SWANA. Telex: 54187 SUAG UN (Attention SWANA). Telephones: 2074, 2149, 3216.

Damanhour Shipping Agency, Suez, 66 Adly Yakan Street, P.O.Box 4. Telegrams: DAMANSHIP. Telex: 54187 SUAG UN (Attention DAMANSHIP). Telephones: 2061, 3176, 3009.

El Menia Shipping Agency, Port Said, 31 El Goumhouria Street, P.O. Box 328 & 130. Telegrams: MINSHIP. Telex: 54263 MENI UN. Telephone: 8672/74.

El Menia Shipping Agency, Suez, 66 Adly Yakan Street, P.O. Box 4. Telegrams: MINSHIP. Telex: 54187 SUAG UN (Attention MINSHIP). Telephones: 2639–3085.

Cairo Shipping Agency, Cairo, 7 Abdel Khalek Tharwat Street, P.O. Box 468. Telegrams: MARAGENT. Telex: 92673 MARG UN. Telephones: 977823, 977826, 932368.

Offices at Safaga, Kosseir and Ras Gharib:
Telegrams: CANASHIP. Telephones: Safaga 10, Kosseir 14, Ras Gharib 71.

N.B.: Safaga, Kosseir and Ras Gharib to be contacted via Kosseir Radio around the clock.

Port Said offices to be contacted via Alexandria or Port Said Radio around the clock.

Suez offices to be contacted via Alexandria or Port Said Radio around the clock.

WADI FIRAN: 28.44 N. 33.13 E.

An open anchorage on Sinai coast in the Gulf of Suez about 85 nautical miles South of Suez.

There are 6 large and conspicuous storage tanks in 2 parallel rows of 3 tanks each lined on shore near the pumping station and painted with aluminium.

PILOTAGE: Pilot boards each tanker at anchorage.

BERTHING: Tankers must approach berth from West, never from North, and must follow same track on their departure to be entirely clear of shallow water. Three berths: No.1, length 430 m., depth 17 m., for tankers of max. 47 ft. draft, 60,000 d.w.t., No. 2 length 430 m., depth 10.3 m. for tankers of max. 28 ft. (to be increased to 31 ft.) draft 25,000 d.w.t., No. 3 length 230 m., depth 6 m., for tankers (unloading only) of max. 17 ft., draft, 20,000 d.w.t. Tankers at berth will be connected to shore pumping station by submarine telephone cable. Mooring and unmooring operations normally take place in daylight.

AUTHORITY: Cie. Oriental des Petroles d'Egypt.

NOTES

Please also advise Shipping Guides Ltd.

El Salvador

ACAJUTLA: 13.35 N. 89.52 W. (See Plan Book)

DOCUMENTS:
1 Clearance from last port.
6 Voyage Memorandum.
6 Crew List.
6 Disembarking Passengers' List (local passengers list).
6 Transit Passenger List.
6 Store List.
1 L.P. International Health Certificate No. 1 and 2.
16 Copies of the Manifests.
2 Copies of Bill of Lading.
4 Cargo Distribution List.
16 Tally Books.
2 Mail List.

Agent distributes all papers. Agent also supplies list of papers for next port.

Bond sealed. Shop sealed.

PILOTAGE: Compulsory. *(a)* Vessels requiring Pilot use International Code Signals. *(b)* Pilot boards vessel at a distance between 1 and 2 km. from the port, where vessel should wait with engine running. *(c)* Pilot ladder required for boarding. *(d)* Gangway ladders should be raised and folded, derricks and cranes inside, anchors ready for berthing. Pilot is equipped with walkie-talkie for communicating with tugs.

ANCHORAGE: There is no specific anchorage area. Pilot meets vessel and immediately proceeds alongside. If there are no berths available, the vessel may anchor anywhere outside the dock.

MAX. SIZE:

Berth	*Max. Draft*	*Vessel Length*	*Depth at MLW*
A–1	9 m.	152 m.	10 m.
A–2	10 m.	183 m.	12 m.
B–3	9 m.	152 m.	10 m.
B–4	10 m.	198 m.	12 m.
B–5	9 m.	152 m.	10 m.
B–6	9 m.	152 m.	10 m.
C–7	12 m.	128 m.	13.7 m.
C–8	12 m.	128 m.	13.7 m.

Tankers: At the sea-line berth, max. draft 12 m. and max. length 213 m.

HEALTH: If there is any suspicion of illness aboard, Captain has to inform by radio 24 hours in advance, indicating nature of disease and all details. On arrival, vessel should anchor with yellow flag hoisted, to wait for the doctor of the port.

RADIO: There is no special key for calling. Port VHF service is open 24 hours a day. Contact through Channels 16 and 27.

Channel 27 receives on 157.35 mHz and transmits at 161.95 kHz. Business and operation.

Channel 16, 156.8 mHz ship calling and Safety. Channel 14, working.

TUGS: Tow lines not usually used; if necessary the tug lines will be used, and their charge included in the whole service.

Three tugs, available, one 800 h.p., one 1,200 h.p., one 1,800 h.p. Tugs meet the vessels off the dock.

BERTHING: Vessels can berth in safety at any time, day or night.

In the case of cargo vessels it should be stressed that the swell experienced alongside is sometimes a serious problem and Masters would be well advised to make use of the shore lines offered on hire to save undue wear and tear on their moorings.

There are 2 piers: the first one called "A" consists of a breakwater mole 763 m. long. The access mole runs for approximately 400 m. and has a free width of 7 m. The pierhead which is 37 m. wide and 310 m. long, includes a combined breakwater, a mooring dock (2 berth capacity) and a transit shed. This pier can handle general and liquid cargo.

At the end of this pier head is constructed a breakwater in a N.W. direction in line with the existing pier for a distance of 35 m., then direction is changed to the North with an angle of 30° and extend 270 m. with a width of 18 m. This breakwater offers 2 berths (C-7 & C-8) capable of handling liquid and general cargo.

The second pier called "B" (4 berth capacity) is 360 m. long and has a free width of 28 m. Products handled in this pier, general and bulk cargo.

MEDICAL: There are doctors in the port who attend normal cases and specialists and hospitals in Sonsonate City at 20 km. (by road) and in San Salvador, capital of the Republic, 85 km. from the port.

DEVELOPMENTS: CEPA intends to develop the port to provide adequate facilities for the handling of containers in order to attend the further increase in the country's foreign trade and particularly to make provisions for the development of containerised berths in Central America.

TANKERS: Moorings at RASA (Refineria de Acajutla Sociedad Anonima). This refinery is the property of Esso Standard Oil and Shell Petroleum Company.

Buoy Berth: Depth of water is about 15 m. Diameter of buoy lines, 2 of 25 cm. for clean products and one of 75 cm. for crude oil and fuel oil. There are no facilities for residue discharge.

STEVEDORES: Must be ordered 24 hours before arrival by Agent, confirmation by radio-telephone as to the number of gangs needed is always convenient.

A line handling gang is always standing by, this gang also attends gangway. No charge for this service.

Stevedores are available for nightwork.

DENSITY: Salt water.

FRESH WATER: Delivered by hoses. Rate approximately 40 t.p.h., cost US$1.20 per metric ton.

FUEL: Possible to supply diesel and Bunker "C" only in limited quantities, delivered by lorries. Viscosities: Bunker "C" 175 sec. Saybolt furol. Diesel 40 sec. Saybolt universal.

FIRE PRECAUTIONS: Inspection of hoses; no smoking; not allowed to solder or light any kind of fire; isolation of the place of loading and discharging operations; fire equipment to be ready.

GANGWAY/DECK WATCHMEN: This service is done by the port staff free of charge.

OPENING/CLOSING HATCHES: This work is carried out by stevedores.

SHIP CERTIFICATES:

Vessel has to carry the Ship's Register (showing the registered tonnage).

Derat. Certificate.

CUSTOMS ALLOWANCES: Customs allow to take out of the vessel only tobacco for personal use. Not allowed to take any wine or spirits out of the vessel.

CARGO GEAR: Ship's gear used, equipment has to be in good state with certificates showing capacity and safety.

IDENTIFICATION CARDS: Not required, but each member of crew has to be in possession of a valid passport.

CONSULS: British Consul. In Sonsonate City there is the Consul of Guatemala Republic, tel. 51-0739, and in San Salvador City are Consulates for most countries.

REPAIRS: Possible to do minor engine and deck repairs. Other repairs can be carried out in San Salvador City. Any repairs that will delay sailing of vessels cannot be done without previous and specific authorisation of the manager of the port.

REPATRIATION: There are facilities for repatriation.

AIRPORT: There is an airport served by regular airlines in San Salvador at 95 kms. from this port (by road).

TIME: No alterations in time during the year; local time is GMT minus 6 hours.

HOLIDAYS: 1st January, Maundy Thursday, Good Friday and Saturday, 1st May, 10th May, 6th August, 15th September, 2nd November, 25th December; the port stops working only on 1st January, Good Friday and 25th December.

POLICE/AMBULANCE/FIRE: National Police (Sonsonate) tel. 51-0838; Ambulance (Sonsonate) tel. 51-0589; Fire (CEPA, Acajutla) tel. 52-3000.

TELEPHONES: No possibilities to install telephones aboard.

GENERAL: Quarantine authorities pay strict attention to the meat on board and its residuum to prevent fever and it is forbidden to remove any kind of meat from the vessel. Berthed vessels need, in case of swell, special hawsers and wires provided by the port, and charged to vessel.

Hire of these lines is US$1.00 each one and for every 1,000 tons gross.

SERVICES: No facilities to discharge tank-washings.

SHORE LEAVE: Members of the crew are allowed to go ashore.

DELAYS: There are no delays for mooring, loading and discharging. Refuelling bunkers operates slower than normal loading and discharging.

AUTHORITY: Comision Ejecutiva Portuaria Autonoma (CEPA).

LA LIBERTAD: 13.29 N. 89.19 W.

CLOSED TO CARGO VESSELS SINCE MAY 1976

DOCUMENTS: Required:

By Port Captaincy
Clearance from last port called.
2 Crew Lists.
1 Store List.
1 Passengers List. In case passengers disembarking, passports to be countersigned by the migration delegate have to be shown.
1 Voyage Memorandum.
1 Manifest of Cargo from each port.

By doctor delegate of health
Health Certificate.
1 Voyage Memorandum.

By quarantine delegate
Voyage Memorandum.
Crew List.
Cargo Manifest, one for each port.

By CEPA delegate
Voyage Memorandum.
Crew List.
2 Store Lists.
Cargo Manifest (5 copies).
Tally Books for cargo.
Number of tons of diesel on board.
Number of tons of water.

By Customs delegate
Voyage Memorandum.
1 Crew List.
Passenger List.
Store List.
Cargo Manifests countersigned by the Consuls each port of origin and 7 more copies for each one.

PILOTAGE: Vessels requiring a Pilot use International Code signals. No official pilot service.

ANCHORAGE: Depths of 60 ft. available. Vessels can anchor at a minimum distance of 1 km. from the quay. All dry cargo vessels work cargo at the anchorage. No quay berths available.

HEALTH: On arrival vessel should anchor and wait visit of Port Authorities. Any suspected diseases should be notified 24 hours in advance.

RADIO: VHF Service with transmission and receiving frequency of 27.075 mHz. In the dock the set is 100 watts AM, transmitter/receiver by 3 Channels:

Channel 1, 2163 kHz calling the tugboats.
Channel 2, 2182 kHz calling and Safety.
Channel 3, 2196 kHz calling the ships.

In the tugs, the sets are 60 watts AM, transmitter/receiver by 5 Channels:

Channel 1, 2163 kHz calling the dock.
Channel 2, 2182 kHz calling and Safety.
Channel 3, 2196 kHz calling the ships.
Channel 4, 2638 kHz calling the ships.
Channel 5, 2738 kHz calling the ships.

The following set is a monitor to receive emergency calls: 2163 and 2196 kHz.

TUGS: No tugs required or available.

STEVEDORES: 24 hours notice required to arrange gangs and barges.

MEDICAL: Inform Agent as soon as possible to arrange a medical visit. The port has doctors to attend normal cases, and there are specialists and hospitals in San Salvador (capital of the Republic) at 35 kms. by road from this port.

TANKERS: At Esso Standard Oil, S.A. terminal, vessels anchor and moor to 3 buoys about 900 yards S.E. of the shore and about 1,000 yards S.S.W. of the pier. Pipe-line extends from La Puntilla in a S.E. direction. Two pipe-lines for discharging products to Esso Standard Oil, S.A, The end of each pipe-line is marked by a metallic buoy, the cargo hoses for No. 1 and No. 2 pipe-lines are connected by separate chain to a "Spreader" which by single chain is attached to a metallic marker buoy. On the "Spreader" there is marked, by welding, 1 and 11 where the chains are attached, indicating what pipe-line they are connected to. Ship's crew is used in connecting and disconnecting cargo hoses.

Vessels should moor only on high water during daylight hours; however, they may unmoor day or night. Launch available for mooring and running lines. Approach is made from the Eastward on a true course 270°, a marker buoy is placed temporarily at a distance of 700 ft. seaward from end of pipe-lines to guide vessel in mooring operations. The marker buoy should be passed on the inside at a distance of 50 ft. Port anchor should be dropped first when the end of the pier is in true bearing 006°. When about 7 shots of chain have run out, the starboard anchor should be dropped. The stern of vessel will swing or may be worked to Northward (starboard). A mooring line should be run to the port stern buoy from port side assisting in swinging the vessel into position. Vessel should tie up securely with 3 lines to each buoy, and anchor spread 60° with 60/76 fathoms of chain on each. The eyes of all lines to buoys should be well protected to prevent chafing on the buoys. When in position, the pipe-line hose buoy is taken on board at the starboard side.

DENSITY: Salt water.

FRESH WATER: Not available.

FUEL: Not available.

GANGWAY/DECK WATCHMEN: There is a service of watchmen provided by Customs.

OPENING/CLOSING HATCHES: Carried out by stevedores.

SHIP CERTIFICATES:

Ship's Register.
Deratisation Certificate.
International Health Certificates required.

CUSTOMS ALLOWANCES: Only tobacco for personal consumption may be taken ashore. No wine or spirits to be taken ashore.

CARGO GEAR: Vessels' cargo gear to be in good condition with certificates of capacity and safety.

IDENTIFICATION CARDS: Not required if crew members possess passports.

CONSULS: In the capital, San Salvador, 35 km. from the port, there are consulates for most countries.

REPAIRS: It is not possible to have repairs.

REPATRIATION: Facilities available.

AIRPORT: There is an International airport served by regular airlines in San Salvador, distance approximately 46 kms. from the port.

TIME: GMT minus 6 hours. No alteration.

HOLIDAYS: Festivals: Saturday of the Holy week, 14th April, 10th May, 22nd June, Corpus Christi, 5th August, 12th October, 24th October, 5th November, 7th December, 24th December, 31st December. Legal holidays: 1st January, Maundy Thursday and Good Friday, 1st May, 6th August, 15th September, 2nd November, 8th December, 25th December. The port is only completely out of work on the following days: 1st January, Good Friday and 25th December.

POLICE/AMBULANCE/FIRE: National Police (La Libertad), 35-3175; Ambulance (San Salvador), 21-9406; Fire (San Salvador), 21-8661.

TELEPHONE: It is not possible to place telephones on board.

GENERAL: Quarantine Authorities prohibit removal of meat from the vessel.

SHORE LEAVE: Crew is allowed to go ashore.

AUTHORITY: Comision Ejecutiva Portuaria Autonoma (CEPA).

LA UNION (Cutuco): 13.20 N. 87.51 W.

(See Plan Book)

DOCUMENTS: See "Acajutla".

PILOTAGE: Obtained usually through Agent, can be cable-requested to Port Captain-La Union.

ANCHORAGE: La Union Bay – up to 34 ft. Approximately 14 Class II and a large number of Class III anchorage berths are available in the harbour. 5 Class II berths are in the vincinity of the pier in depths of 33 ft. to 30 ft., and approximately 9 more, in depths of 70 to 30 ft., are just Westward of Isla Zacatillo. The first area has a mud bottom; the second is sandy and rocky. The large number of Class III berths are in an area Northward of the pier and in the area between the 2 anchorages providing Class II berths. The least depth in each of the areas is 25 ft. A large number of relatively unsheltered anchorage berths of all classes are available outside the harbour in the Gulf of Fonseca.

RESTRICTIONS: Enter any time – preferable on flood tide with draft over 24 ft.

MAX. SIZE: Largest vessel that can be accommodated in harbour would occupy an anchorage berth with a min. depth of 43 ft. and a diameter of 3,300 ft. Largest vessel that can be accommodated alongside wharf would occupy a berth with least depth of 25 ft.; length is not a limiting factor, although a max. 550 ft. is recommended due to strong currents, 3 knots, and pressure on part of any vessel extending for any greater distance beyond length of wharf.

HEALTH: Disease should be reported. Pratique necessary on each occasion.

RADIO: Direct to Agents or Guarailco, San Salvador.

TUGS: No tugs required.

BERTHING: Berthing usually carried out on slack tides due to cross currents, up to 3 knots. The estimated military port capacity is 1,800 tons of general cargo per day. Port can accommodate 2 standard-type ocean-going cargo vessels, and possibly one alternative class T/C (small ocean-type tanker under favourable conditions) alongside berths, and approximately 14 ocean-type cargo vessels, and a large number of Class III (coaster-type cargo vessels) at anchorage berths. Roll-on/roll-off pier, depth alongside 16 ft. LW.

STEVEDORES: Prior advice preferable. Stevedore force consists of 12 gangs of up to 16 men per gang for on-board work. Similar gangs are available on pier, and up to 300 labourers, crane and fork-lift operators comprise shore gangs.

MEDICAL: Services available – no special restrictions.

TANKERS: Drafts 25/34 ft. fore and aft. Tankers of up to 550 ft. in length can be accommodated at either side of pier, where adequate connections of 6–8 in. and 10 in. pipe-lines are located. Largest vessel that can be accommodated alongside would occupy a berth with a least depth of 25 ft.; length is not a limiting factor, except as noted previously.

FRESH WATER: Four 2 in. connections on each side; volume estimated at 10 t.p.h.

FUEL: Bunkers and diesel – can be delivered when berthed.

GANGWAY/DECK WATCHMEN: Not required – National Marines on guard.

OPENING/CLOSING HATCHES: Carried out by stevedores.

CUSTOMS ALLOWANCE: Not controlled, but restricted ashore.

IDENTIFICATION CARDS: Passes for leaving ship to have Captain's signature.

CONSULS: Only Nicaragua is represented.

REPAIRS: No facilities.

REPATRIATION: Can be arranged.

AIRPORT: San Salvador – 120 miles away – regular airlines.

TIME: GMT minus 6 hours. No alterations.

HOLIDAYS: Easter Thursday, Good Friday. Port not worked only on those dates.

POLICE/AMBULANCE/FIRE: In La Union – Close to the Port.

TELEPHONES: None available.

SHORE LEAVE: Allowed.

AUTHORITY: International Railways of Central America.

NOTES

Please also advise Shipping Guides Ltd.

Equatorial Guinea

BATA: 01.52 N. 09.46 E.

SHIPMASTER'S REPORT

Roadstead with single point mooring buoy connected to the shore with 6 in. pipe-line, 6 in. hose: (everything in a deplorable state). No tugs or Pilots available. Master should have local knowledge when approaching berth in hours of darkness. Vessels are moored with 2 anchors forward and 2 ship's lines (plus two 8 in. shore lines) to the single point mooring buoy. 5 lengths of 15 m. hose available. Preferable stern discharge connection to be used. Max. pressure: 4 kg/sq.cm. All grades through this line. Linewash of water in between the different grades. There is rubber ball for cargo separation.

Advice: 1. In view of the deplorable state of buoy, lines and hose, Master should be very careful in mooring his vessel – which has to be done by himself – in order not to damage same.

2. Master should have ship's motorboat ready to run ship's lines to the buoy because motor launch, which is supposed to do this is very old and liable to breakdown at a crucial moment.

3. Anchors should be dropped in a position S.W. of the buoy in order to stay well clear of the unmarked wrecks, in good holding ground with 4 to 5 lengths of chain.

4. Tidal currents move the ship relative to the mooring buoy – so it is necessary to heave anchors tight – bearing in mind that the construction, etc. of the buoy is very weak.

5. The buoy carries a light but the light does not work. Anyway mooring after dark is not advisable.

Documents: Only a small customs post available here:

1 Cargo Manifest.
1 Store Manifest.
1 Crew List.

Custom allowance: No restrictions – no sealing of bonded stores.

Shore leave: Allowed by ship's boat.

Radio communication: None. Though there are officially coast radio stations in this country, they do not operate on schedule. Telegrams should be sent via coastal radio stations of other countries. No VHF.

PUERTO MACIAS, (Puerto Nuevo): 01.49 N. 09.44 E.

Situated about 1 mile South of the mouth of the Rio Ekuku. This is quite a new jetty – developed in 1973 – shaped like the letter "L", where the long leg of this "L" is connected to the shore and 4 dry cargo vessels can moor alongside the short leg in about 14 m. of water. Every vessel has on her off-shore side 2 mooring buoys to assist in mooring and unmooring. No tugs available. Though it is stated that a Pilot is available, this information should be treated as unreliable. The pier is used for the discharge of general cargo and the loading of logs and sawn wood. According to information received this jetty will be made available to tankers for discharge of oil products.

Documents: See "Bata". This new jetty falls under the jurisdiction of Bata authorities.

Radio communication: See "Bata".

REY MALABO, (formerly Santa Isabel): 03.46 N. 08.48 E.

Situated on the Island of Macias Ngueme Biyogo (formerly Fernando Poo) Capital of the Republic of Equatorial Guinea.

Documents:

9 Crew Lists.
3 Stores Manifests.
3 Crew declarations.
2 Lists of Arms and Ammunition.
4 Lists of Ports of Call.
2 Passenger lists or negative.

General: No tugs.

Pilots: Effectively none. Only a locally informed inhabitant of this port comes on board to inform the Master, he is equipped with a large scale Spanish chart of this bay, but he has no nautical knowledge and he does not know how to handle a ship.

Note: 1. Masters should bear in mind that they have to manoeuvre and moor the vessel themselves.

2. In view of the continuous breakdowns (and insufficient power) of the mooring-launch it is absolutely necessary to have the ship's motor boat at stand by to run the ship's mooring-lines ashore.

Mooring procedure: Tanker berth: old jetty (muelle viejo). The ship should be moored stern-to to this jetty. On entering the port with the lights in line starboard anchor is dropped in the middle of the bay and the ship has then to manoeuvre around with her own engines, till in line with the berth.

N.B. Because there is very seldom anybody present at the jetty to accept the mooring lines (on arrival as well as on departure) the vessel's crew should be kept on stand by to do this job.

Arrival/Departure: Between 0600 and 1800 hrs.

Tankers: Preferably stern discharge into a 6 in. line with 6 in. hose. All grades through one line – Linewash with water in between – pressure 4 kg/sq.cm. max.

Dry cargo vessels: Berth at a new jetty on the West side of the bay. No cranes available.

Advice: 1. Masters should be very careful when dropping their anchors as some vessels (Man of war) moor with their sterns to the dry cargo jetty and have their anchors in the middle of the bay. These anchors are very easily fouled by incoming vessels anchors. A useful suggestion might be to put anchor buoys on the anchors in order to show another incoming ship their position.

2. Because it is quite difficult to manoeuvre a tanker around in this bay without any tug assistance, it should be borne in mind that when the wind is over Force 2 manoeuvring with a sizeable vessel is apt to falter, and no assistance can be expected from any quarter.

Departure: Vessels are free to leave within mentioned hours without Pilot.

Radio communication: See "Bata".

Custom allowance: No limit – no sealing of bonded stores.

Shore leave: No restrictions, but with own motor boat.

Currency: Eq. Guinea Peseta = Spanish Peseta.

PURSER'S REPORT:

Documents:

9 Crew Lists.
9 Passenger Lists (Marked "none" if no passengers on board).
3 Customs Declarations.
3 Stores and Provisions.
4 Arms and Ammunition.
1 Vaccination List (Smallpox, Cholera and Yellow Fever).
9 Cargo Manifests.

Stores: No stores were purchased at this port, advise top up prior to calling at this port.

Mail: Advisable to send to next big port.

Bata: Same papers as above. No officials come out to the ship at this port, however, papers should be kept ready. Vessels moor to a buoy for discharge.

NOTES

Please also advise Shipping Guides Ltd.

Ethiopia

ASSAB: 13.01 N. 42.44 E.

PORT LIMITS: A line drawn from Ras Gombo to the Northern point of Umm al Baher (Islands) to Southern point of Umm al Baher, then to Ras Marcanah.

DOCUMENTS:

5 Manifests for transit passengers and passports.
5 Manifests for landing passengers and passports.
5 Crew Lists.
1 Complete Crew Provisions List.
1 Crew Personal Effects List.
1 Store List.
6 Cargo Manifests.

PILOTAGE: Compulsory Pilots take tankers in and out of oil harbour only during daytime. Pilots embark about 1 mile N.N.E. from Northern extremity of breakwater. Commercial harbour gives 24 hour service. Vessels calling Assab must advise Agent through Assab Coastal Radio Station by call sign ETC. Assab Radio Signal Station is available.

ANCHORAGES: Assab Bay provides good anchorage in 42 to 48 ft. of sand and coral bottom, good holding ground. Generally weather in Assab can be divided into two: Summer time and Winter time weather, during Summer (May–September) Northerly wind blows with a maximum force of 3/4 BS. During Winter time (October-April) South-easterly local monsoon winds blow usually 5/6 BS but reaching force 7/8 BS during daytime and generally drop at night. This 7/8 BS force is mainly experienced about December to February.

RESTRICTIONS: There are 2 entrances, the North and the South entrance, the depth at the entrances is 38 ft. Least width 1,300 ft.

Vessels of any size enter or leave port during hours of darkness except tankers, and vessels carrying dangerous cargo. In these cases, where vessels are carrying explosives or other dangerous cargoes, Agents of calling vessels must notify the Port Office in advance of discharging and/or loading of explosives. Inflammable and other highly dangerous cargoes in commercial harbour are permitted from 0600 to 1800 hrs. local time.

MAX. SIZE: Largest vessels which can enter commercial harbour 200 m. LOA, 80 ft. beam, 34 ft. draft.

HEALTH: Quarantine and sanitation services available. Quarantine officer boards arriving vessels and necessary medical clearance given.

RADIO: Coastal radio station available *(a)* position Lat. 13° 01′ 24″ N. *(b)* Long. 42° 44′ 38″ E. Coastal radio station in service for 13 hours per day 0700 to 2200 hrs. Call sign ETC. Transmits traffic lists on 489 kc/s after a preliminary announcement on 500 kc/s, 30 minutes past each odd hour starting at 0500 and ending 1700 hrs. (0530, 0730, 0930, hrs. etc.).

(c) Transmit traffic lists on 6509 at 0500, 0900 and 1300 hrs. and searches 6265.5–6280.5 between 0515–0600, 0915–1000, and 1315–1400 hrs.

(d) Transmit traffic lists on 8618 at 0700, 1100 and 1500 hrs. and searches 8354–8374 between 0715–0800, 1115–1200 and 1515–1600 hrs.

(e) Rates shall include station charges and charge of transmission over telecommunication network within Ethiopia.

(f) Accepts ship letter telegrams (SLT) from ships for delivery in Assab.

(g) For radio telephone service. Station keeps watch and replaces on 2182 for radio telephone service at 0615–0700, 0815–0900, 1015–1100, 1215–1300, 1415–1500, 1615–1700 hrs. and transmits traffic same hours on 4379.3. Service hours will be extended to 24 hours.

VHF: VHF system will be installed in the port in the near future.

TUGS: Tug service compulsory for ships over 300 n.r.t. 2 tugs of 600 h.p. each, attend ships during arrival and departure.

BERTHING:

(a) North Half Jetty 1,620 ft. length, 36 ft. depth.
(b) South Half Jetty.
(i) 1115 ft. length and 33.8 ft. depth.
(ii) 459 ft. length and 29.5 ft. depth.
(iii) 164 ft. length and 19 ft. depth
(c) 2 coaster piers, each 260 ft. length 26 ft. depth. Temporarily out of use.

Fenders are excellent and protect ships from impact; harbour is modern and has modern breakwater 711 m. length. 7 big ships and 4 coasters can be accommodated at a time.

STEVEDORES: 14 stevedoring agencies, any kind of cargo can be discharged and loaded. Skilled labourers and loading/discharging capacity are respectively 30-15 per hour. Crane lift capacity 30 tons.

Normal working hours: 0700 to 1200 hrs., 1600 to 1800 hrs. Work can be performed 24 hours a day including holidays.

MEDICAL: 1 hospital in town and clinic in port. When sick person on board, hoist (by day) International code flag "W", (by night) 3 lights in vertical line upper one red, and middle and lower, white lights. Doctor may be called on board at any time to attend sick crew or passengers by arrangement with Agents.

TANKERS: Oil harbour about 1.5 miles S.E. of commercial harbour with draft 33 ft. Crude oil discharging terminal 500 m. from Southern end of breakwater open sea buoy berth – tankers of 800 ft. length, and 36 ft. draft can be accommodated. Diameter of pipe-line for loading and discharging black products – 12 in., white products 10 in.

Tankers at the Shell Berth are moored by dropping 2 anchors and tying up 2 ropes from each quarter to the buoys, and 1 rope from each quarter to the dolphins. All grades of oil in bulk discharged into shore storage tanks from this harbour, and fuel oil is discharged from the Commercial Harbour.

In Assab, the petroleum installations are of Shell Red Sea Co., and Mobil Oil East Africa Co.

SALT LOADING TERMINAL: Located 1.7 miles from the Commercial Harbour, salt loading ships drawing up to 33 ft. are berthed at this terminal using 2 anchors and mooring to buoys and dolphins.

DENSITY: At berths is 1.03 while the tides are negligible for all seasons; max. 1 ft.

FRESH WATER: Available. Supplied upon request by Agent and can be delivered at 60 t.p.h.

FUEL: All grades available, at commercial harbour. Advance notice necessary. Rate of 300 t.p.h.

FIRE PRECAUTIONS: Modern fire brigade.

GANGWAY/DECK WATCHMEN: Watchmen on deck necessary, and rate arranged as per agreement of employer and employee.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CERTIFICATES: All ship's International Certificates should be on board.

CUSTOMS ALLOWANCES: Tobacco, 400 cigarettes. Wine and/or Spirits. 1 litre or bottle of spirit.

CARGO GEAR: Different types of certified cargo handling equipment available.

IDENTIFICATION CARDS: Needed.

CONSULS: Only Italian Consulate in Assab, others live in Asmara the capital city of Eritrea.

REPAIRS: Minor repairs can be carried out at Port Office workshop.

REPATRIATION: Possible.

AIRPORT: 15 km. from Assab. Ethiopian Airlines. 5 domestic flights per week.

TIME: GMT plus 3 hours.

HOLIDAYS: See "Massawa".

POLICE/AMBULANCE/FIRE: Port Police Tel. 60049; Hospital Tel. 60119; Port Office fire brigade Tel. 60102.

GENERAL: 1 modern hotel and 1 motel with full facilities available in town.

SHORE LEAVE: Crew allowed ashore, with boarding passes.

AUTHORITY: Ministry of Communication, Department of Marine.

MASSAWA: 15.37 N. 39.28 E.

PORT LIMITS: The coastline of Gurgussum Peninsula, at 15° 39′ N. to a point 15° 39′ N. 30° 30′ E. to 15° 35′ N. 39° 30′ E. to the coastline at 15° 35′ N. 39° 26′ 50″ E.

DOCUMENTS:

2 sets Manifests.
2 sets Bills of Lading.
5 Crew Lists.
5 Passenger Lists.
2 Stores Lists.

APPROACHES: Through North channel and South channel. In channel, in direction of leading lights 243°, max. depth 31 ft. (but alongside 30 ft.) Marking buoy showing a wreck in position approximately 200 m. S.E. of North breakwater.

PILOTAGE: Pilotage is compulsory for all vessels over 100 n.r.t. Pilot section headed by a Chief Pilot and 2 other Pilots.

There are 2 pilot boats. ETA should be given to Agent who will inform Pilot 72 hours prior to arrival. Signal tower located in port area contacts vessel on arrival informing Agent and Pilot, and receiving or transmitting by Morse lamp messages to and from vessel.

ANCHORAGES: 8 cables East of main lighthouse. Anchorage North of leading light not recommended.

Tides. Normally the range of tide varies between 1.5 and 2.0 m., but during spring tide season the range varies up to 3 m.

MAX. SIZE: Length 520 ft., draft 30 ft.

HEALTH: Doctor normally boards with Pilot, but can be asked to board together with Customs and Immigration while vessel on roads. All crew members must be vaccinated against smallpox and yellow fever, and possess necessary certificates. Deratisation and other health certificates required. Deratisation cannot be effected at Massawa, but exemption certificate can be obtained.

RADIO: Assab Radio, call sign ETC, Djibouti Radio, or Aden Radio may be used. Asmara Radio, call sign ETC 2, working hours 0500 to 1700 GMT. Radio-telegraphy and radio-telephone services.

TUGS: Join vessel in port. Compulsory.

3 tugboats are available, two of 350 h.p. and the third 1,000 h.p. The smaller motor tugboats used for assistance mainly within the port limits, and the deep-sea salvage motor tugboat, for salvage operations, but whenever conditions demand, is also employed for assistance within the port.

BERTHING: Vessels normally drop anchor before berthing.

Commercial Harbour: 6 berths, namely 1 to 6, and the overall distance from Berth No. 1 to Berth No. 6 is 907 m. These berths normally used by vessels handling general cargo, bagged cargo and livestocks. Depth of water at mean low water springs (MLWS) is shown below:

Berth No. 1 – 16 ft. 6 in.
Berth No. 2 – 24 ft. 6 in.
Berth No. 3 – 28 ft. 6 in.
Berth No. 4 – 28 ft. 0 in.
Berth No. 5 – 27 ft. 0 in.
Berth No. 6 – 30 ft. 0 in.

Salt Berth: This is a single berth where vessels load salt in bulk. The depth at the berth is 32 ft. Max. draft 29 ft. Loading with the help of conveyor belt at the rate of about 300 t.p.h.

Cement Berth: Depth 18 ft.

American Jetty: Depth 18 ft.

However, dredging will be carried out to accommodate vessels of a greater draft in the near future.

STEVEDORES: Radio 24 hours' notice of ETA stating number of gangs required. Loading discharging rates 5 t.p.h. on general, 10/15 t.p.h. on bagged cargo.

DENSITY: 1025.

MEDICAL: Notice should be given to Agent only when specialist needed. Hospital treatment available. Dental facilities available at Asmara, 110 km. away.

TANKERS: AGIP, Arkiko oil station terminal: max. draft for entering channel 29 ft.

Total Pier, depth alongside 36 ft., max. draft 30 ft.

FRESH WATER: Supplied alongside, Max. rate 600 tons per day or by barge of 50 tons on roads. Barge can be loaded/discharged in 8 hours.

FUEL: Can be obtained alongside oil terminals and at Berths 5 and 6 for heavy fuel only. Diesel can be supplied by lorries alongside. No bunker barge available.

GANGWAY/DECK WATCHMEN: Compulsory when alongside.

OPENING/CLOSING HATCHES: Normally by labourers, but can be done by crew.

CUSTOMS ALLOWANCES: Tobacco, 200 cigarettes per man. New allowance can be delivered after 1 week. Wine/Spirits: 1 bottle of wine/spirits (opened). Wine and beer quantity necessary for the stay in port allowed upon reasonable request on arrival.

IDENTIFICATION CARDS: Not needed. Immigration gives port entry card (without crew member's name) which must be given back prior to departure. In case of loss a fine is likely.

CONSULS: Italian Vice-consulate, Box 62. Tel. 52214. Other consulates at Asmara for Belgium, France, Gt. Britain, Italy, Sudan and U.S.A.

REPAIRS: Good workshops for minor engine repairs. Slipway for vessel up to 600 g.r.t.

REPATRIATION: Via Asmara. Daily flight Massawa-Asmara, then by international flights. Or Massawa-Asmara by road, 110 km., asphalt road.

AIRPORT: 7 km. from port with daily service to Asmara. International airport at Asmara 60 km. by air.

TIME: GMT plus 3 hours.

HOLIDAYS: January 7th (Christmas Day – Coptic); January 19th (Epiphany); March 2nd (Victory of the Battle of Adowa); March 13th (Prophet's Birthday); April 6th (Victory Day); April 23rd (Good Friday – Coptic); April 25th (Easter Sunday – Coptic); May 1st (Labour Day); September 11th (New Year's Day); September 12th (Abolition of Feudalism); September 27th (Finding of the True Cross); October 6–8th Id-al-Fatir; December 18th Id-al-Kebir and Sundays.

POLICE/AMBULANCE/FIRE: Police, tel. 52425; Ambulance, tel. 52234–5–6; Fire Brigade, tel. 52220.

TELEPHONES: Possible to place telephones on board. Arranged by Agent.

SERVICES: Radar and gyro compass technician available, but special spare parts not available.

SHORE LEAVE: Crew cannot leave vicinity of Massawa without special immigration permit.

AUTHORITY: Department of Marine.

NOTES

Please also advise Shipping Guides Ltd.

Faroe Islands

KLAKKSVIK: 62.14 N. 06.35. W. (See Plan Book)

DOCUMENTS:
One of each:
Crew List.
Passenger List.
Custom Documents (one list crew's quantity of tobacco and spirits).
Health Document.
Manifest.
Bill of lading.

PILOTAGE: Not compulsory but available. Give ETA via Torshavn radio, OXJ, 1 or 2 hours before arrival, and Pilot will meet vessel in Roads. International signals can always be used. VHF Channels 16, 12, and 6 in use.

ANCHORAGE: In Roads in 12 to 20 fathoms; good anchorage.

RESTRICTIONS: No restrictions upon entry.

MAX. SIZE: Up to 450 ft. length, but draft must not exceed 20 ft.

HEALTH: Pratique usually automatic.

RADIO: Torshavn radio, OXJ, is only coast station in Faroe Isles.

TUGS: No tugs available.

BERTHING: Ships will be berthed on arrival, if ETA announced 12 hours before arrival.

STEVEDORES: Ships Agent will arrange stevedores.

MEDICAL: Inform doctors before arrival. Hospital facilities available.

TANKERS: Only small tankers, up to 2,000–3,000 tons can be handled.

FRESH WATER: Available from quay. 30 t.p.h.

FUEL: Diesel oil available, usually without notice (or short notice).

DEVELOPMENTS: Berthing place will be widened about 600 ft. on each side of bay and permissible draft will be increased.

GANGWAY/DECK WATCHMEN: Watchmen usually unnecessary, but available if desired.

OPENING/CLOSING HATCHES: Normally done by crew.

CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes. Wine and/or Spirits, 1 bottle of wine and 1 of spirits.

IDENTIFICATION CARDS: Not needed.

CONSULS: British, tel. 5109 and 5489; Norwegian, tel. 55018 and 55353.

REPAIRS: All types of deck and engine repairs possible. Slipways for ships up to 200 ft. length.

REPATRIATION: Small changes in crew can usually be arranged and, for example, sick seamen/fishermen are often sent home, when recovered.

AIRPORT: Nearest airport on Vagoy, about 6 hours travelling. Regular flights, 6 a week.

TIME: GMT. Permanent.

HOLIDAYS: Cargo work can be arranged on holidays.

POLICE/AMBULANCE/FIRE: Police 5348; Ambulance 5464; Fire 04.

TELEPHONES: Can be arranged on board at one berthing place, at about 50,00 kr plus dues for conversations.

SERVICES: Compass adjusting, day and night.

SHORE LEAVE: Crew members allowed ashore.

DELAYS: Normally there are none.

DEVELOPMENTS: 3 new quays under construction.

AUTHORITY: Harbour Master.

AGENT: Christen Joensen Stengavegur, P.O. Box 179, 3870 Klaksvik, Faroe Islands. Cables Christen Joensen. Tel. Klaksvik 55922.

SOERVAAG: 62.04 N. 07.18 W.

DOCUMENTS:
Bill of Lading.
Customs Documents (including Crew List).
Ship's Certificate (stating size of ship).

PILOTAGE: Ships can call Pilot via Torshavn Radio. Pilot has good knowledge of local conditions.

ANCHORAGES: Danish Chart No. 82 – on Soervaag fjord – can be recommended as good. Bottom gravel.

RESTRICTIONS: Difference between high and low water up to 2 m. on Spring tide and up to 1 m. on neap tide.

MAX. SIZE: Largest vessel reported in Soervaag was 12,000 d.w.t. tanker. Harbour about 150 m. long and formed with one long pier and another 1 stretching from it. Draft at pier 8 m. Pier runs N.E./S.W.

HEALTH: Ships coming from countries having epidemic-disease have to fly the flag "Q". No persons allowed connection with shore, before official doctor given free pratique. Doctor comes from Midvaag or Wesmannahavn and can be at Soervaag in half hour.

RADIO: Only civilian radio on Faroe Islands is Torshavn-Radio (Int. call sig.: OXJ) via this radio ships can call for medical assistance and weather forecast. These 2 services are free. All traffic to Faroe Islands via Torshavn-Radio.

TUGS: No actual tugs can be obtained, but many small vessels which can be used as tugs.

BERTHING: Captains should take care when berthing not to come on to East side of pier – owing to very low water.

STEVEDORES: Arranged through A/S Nl. Niclasen, Soervaag, or Harbour Master.

MEDICAL: Hospital in Torshavn with all facilities.

TANKERS: Ordinary pier also used by tankers (draft 8 m.) size of load/discharge-lines: 3 in. and 6 in.

FRESH WATER: Ships can obtain fresh water direct from pier.

FUEL: Marine diesel fuel; turbo-jet A1–100; gasoline-petroleum.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Captains have to make arrangements with stevedores, receivers or shippers.

CUSTOMS ALLOWANCE: Tobacco, each crew member is allowed to have 200 cigarettes or 250 gm. of tobacco. Wine and/or Spirit, crew members not allowed any wine or spirit. Captain allowed 2 bottles every second day.

IDENTIFICATION CARDS: Not required.

CONSULS: Belgium, Finland, Greece, Iceland, Norway, Spain, U.K., West Germany, Brazil, France, Holland, Italy, Portugal, Sweden.

REPAIRS: Small deck and engine repairs carried out.

DRY DOCKS: On Skaalefiord, dry dock up to 1,500 d.w.t.

REPATRIATION: Available.

AIRPORT: Faroe Island has 1 airport – only 3 km. from Soervaag. During Summertime daily services to Bergen, Norway and Copenhagen, and weekly services to Glasgow.
During Wintertime weekly services to above destinations.

TIME: GMT. Permanent.

HOLIDAYS: Same as Denmark.

POLICE/AMBULANCE/FIRE: Police 8; Ambulance 8; Fire 4 or 46.

TELEPHONE: Telephones can be placed on board.

SHORE LEAVE: Crew members are allowed ashore.

REGULATIONS: Per ordinary regulations in Danish Ports. Harbour dues to be paid before ship's departure.

DELAYS: Usually none.

AUTHORITY: Harbour Master.

TORSHAVN: 62.00 N. 06.45 W.

DOCUMENTS: See "Klakksvik".

PILOTAGE: Not compulsory. Can be obtained through Torshavn. Radio 2182 kHz. or Channel 16 VHF (Harbour Office).

ANCHORAGES: Due South of breakwater in depths about 30 fathoms.

MAX. SIZE: Max. draft 25 ft. This is only restriction.

HEALTH: Pratique usually automatic.

RADIO: Torshavn Radio, OXJ.

TUGS: No tugs available.

STEVEDORES: Must be arranged with the Agent.

FRESH WATER: 100 t.p.h., by pipe-line.

FUEL: All kinds of fuel at 100 t.p.h.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: By crew.

CUSTOMS ALLOWANCES: Tobacco (half carton); wine/spirit (1 bottle).

IDENTIFICATION CARDS: Not required.

REPAIRS: All kinds are possible.

DRY DOCKS: Slipway for vessels up to 1,000 tons.

REPATRIATION: Can be arranged.

AIRPORT: Regular airlines, 2 hours by car from Airport.

TIME: GMT Permanent.

HOLIDAYS: Cargo work can be arranged on holidays.

POLICE/AMBULANCE/FIRE: Police, 1448; Ambulance, 3540; Fire, 04.

TELEPHONES: No facilities.

SERVICES: Compass adjusting only.

SHORE LEAVE: Allowed.

AUTHORITY: Torshavnar Havn.

TRANGISVAAG: 61.33 N. 06.50 W.

DOCUMENTS:
1 Crew List.
1 Passenger List.
1 Bill of Lading.
1 Bonded Store List.

PILOTAGE: When Pilot required pre-arrange with Agent by telegram or telephone, 2 hours notice ETA wanted. Pilot boat is local fishing-boat, usually boarding vessel at harbour entrance.

ANCHORAGE: Safe sheltered harbour up to 30 fathoms deep along the entrance transit bearing. Vessels anchor 1 cable offshore in 8 fathoms, clay bottom.

RESTRICTIONS: Vessels may enter harbour day and night.

MAX. SIZE: Vessels may berth with draft up to 7 m.

HEALTH: Pratique granted if no contagious illnesses aboard and all arrival formalities accomplished by the boarding officials.

RADIO: Torshavn Radio, call signal OXJ, 24 hours service, listens 2482 kHz, replies and transmits traffic on 1778 kHz, traffic lists on 1778 kHz 35 minutes past each even hour. VHF service: Channel 16 (156.80 mHz) Channel 26 (161.90 mHz). All ETA messages, etc. must be routed through Torshavn Radio.

TUGS: None; if required local fishing-boats are capable to act as tugs.

BERTHING: Tveraa at Northern side of fjord. Outer side of quay 280 m. length and 20/21 ft. alongside. Inner side length 170 m. and 15 ft. alongside. Quay is for general cargo, fish and salt.

Harbour basin length 58 m., depths 7 to 18 ft. alongside.

Drelnes on South side of fjord. Quay length 89 m. Depth alongside outer side 23 ft.; inner side length 43 m. depth 22 ft.

STEVEDORES: Enable Agent to arrange gang important obtain in good time accurate ETA from vessel. Work normally not carried out on Sundays.

MEDICAL: Advance notice to Agent preferable, good hospital facilities for both surgery and medicine.

DENSITY: 1024.

FRESH WATER: Water available at main quay, rate 50 t.p.h.

FUEL: Diesel gas oil available, 50 t.p.h., no advance notice required.

DEVELOPMENTS: New quay under construction in extension of existing quay.

GANGWAY/DECK WATCHMEN: Available, but not compulsory.

OPENING/CLOSING HATCHES: Crew allowed to open and close hatches.

CUSTOMS ALLOWANCES: Each crew member allowed 200 cigarettes or 200 grams tobacco out of Bond. Limited quantity wine and spirits.

IDENTIFICATION CARDS: Not needed.

CONSULS: Spanish Vice-Consul.

REPAIRS: Local marine repair companies can undertake all repairs of general nature to deck, engines, hull, electric and radio equipment, etc. Slipway available for small vessels.

REPATRIATION: May be arranged by sea or air.

AIRPORT: (Vagar) Served by regular airlines, located 50 miles from Trangisvaag.

TIME: GMT, no alterations during the year.

HOLIDAYS: New Year's Day; Good Friday; Easter Monday; Labour Day; Ascension Day; Whit Monday; Christmas Day; Second Christmas Day; work not carried out these days.

POLICE/AMBULANCE/FIRE: Police tel. 10 and 53; Ambulance 134; Fire 159.

TELEPHONES: Usually not placed aboard, but can be arranged.

SHORE LEAVE: Allowed.

AUTHORITY: Harbour Master.

NOTES

Please also advise Shipping Guides Ltd.

Fiji Islands

LAUTOKA, (Vuda Point): 17.36 S. 177.26 E.

DOCUMENTS/HEALTH: Refer to "Suva".

PILOTAGE: Not compulsory at present. However, most vessels avail themselves of a Pilot, who boards at Navula Passage, 20 miles South of Lautoka. Masters should telegraph to their Agents ship's ETA at Navula and indicate whether they require a Pilot or not at least 24 hours in advance.

Note: Radio communications with Fiji can be difficult and Masters are advised that telephone or telex messages worked via New Zealand or Australia direct to their Agents are far more reliable.

The Pilot normally boards from a 26 ft. wooden launch, blue hull with white superstructure, buff cabin top with orange liferaft on forward cabin. The pilot vessel can be contacted on VHF 16/6. Listening watch only when vessels are expected. Pilot normally boards 1 mile seaward of the passage on the leads. In heavy weather it may be necessary for a vessel to enter the passage to embark the Pilot. There is no anchorage outside the passage.

Vessels requiring pratique should anchor approximately 1 mile to the Westward of Vio Island in Lautoka Harbour. If prior arrangements have been made through Agent, Health Officers may board inside Navula (The Health Officers inspect vessels only from 1 hour after sunrise to 1 hour prior to sunset). The Pilot for those vessels not employing one from Navula but requiring a Pilot for berthing will board at the quarantine anchorage off Vio Island.

ANCHORAGES: The whole of the area enclosed by a circle of diameter approximately 1 mile between Vio Island and Pinder Reefs is an acceptable anchorage with depths ranging from 9 to 13 fathoms.

MAX. SIZE: Minimum depth in approaches to wharf 32 ft., depth alongside 36 ft. Generally speaking, any vessel not exceeding 32 ft. draft can be accommodated. Main wharf is only 457 ft. long but overhangs are allowable, ("Oriana" LOA 804 ft., berths at Main Wharf), dolphins for mooring lines being situated off each end of the wharf. Range of tide approximately 5.5 ft. at springs and 3 ft. at neaps, but state of tide does not affect the foregoing.

At Vuda Point, the tanker berth of Lautoka, tankers in the 18,000 to 24,000 d.w.t. class can be handled. This is a submarine pipe-line installation, the ship mooring to 4 buoys, available depth being about 36 ft.

TUGS: No tugs available. Can be obtained from Suva if reasonable notice is given.

BERTHING: Berthing and unberthing at Vuda Point only in daylight. Berthing at Lautoka is at discretion of Harbour Master or Pilot, but in normal conditions is effected at any hour of day or night.

Berthing in Lautoka is generally effected port side to.

Wharf	*Length*	*Depth*
Queens West	457 ft.	36 ft.
Queens North	257 ft.	24 ft.
Queens East	400 ft.	12 ft.
SPSM	146 ft.	32 ft.
Kings	300 ft.	6 ft.

FUEL: Diesel fuel is available at the North and East berths on Queens Wharf.

FRESH WATER: Fresh water is available at all berths, there may be some restrictions in the dry season.

TANKERS: See "Max. Size". No slop discharge facilities. Discharge line 8 in. diameter.

DENSITY: 1025.

CONSULS: None.

REPAIRS: Only comparatively minor repairs can be effected such as welding jobs and repairs to pumps and other auxiliaries.

REPATRIATION: Repatriations can be effected through vessel's Agents.

AIRPORT: Nandi International Airport is 16 miles from Lautoka. Frequent flights to all parts of the world by several major airlines operating through Nandi.

TIME: GMT plus 12 hours. No alterations to clocks.

POLICE/AMBULANCE/FIRE: Dial 000 in emergency. Police, 60222; Ambulance, 60399; Fire, 60211.

SERVICES: Tank-cleaning labour and labour for painting, chipping, etc. can be provided, but no equipment. No facilities for discharge of slop tanks etc. Compass adjustments can be arranged.

AUTHORITY: Wharf Manager, Ports Authority of Fiji, Lautoka.

LEVUKA: 17.41 S. 178.51 E.

DOCUMENTS:

Goods carried in unregistered space (C.E. 148) (1 only).
List of articles in possession of Crew, Officers and Master (1 only).
Crew List (8 only).
Passenger List (8 only).
Parcel List (2 only).
Primary Health Report (1 only).
Special Malaria Forms (1 only).
Vaccination Certificates (1 for each person).
Derating Certificates (1 only).

PILOTAGE: Pilots are arranged through Agents.

MAX. SIZE: Length 560 ft. Max. draft 25 ft.

HEALTH: Radio pratique may be granted when any vessel has not visited any malarious port and Master declares that crew and passengers are healthy and vessel has not come from any area where internationally quarantinable diseases are endemic or in epidemic. Vessel may then enter port by day or night. On berthing, Master must immediately deliver to Quarantine Officer fully completed Primary Health Report and Derating or Derating Exemption Certificate. If there is any suspected case of disease or fever on board, vessel must be anchored at quarantine anchorage until cleared by port Medical Authority. Pratique is automatic if a vessel has been granted pratique at another port in Fiji.

TUGS: No tug service available.

BERTHING: Only 1 vessel berthing at a time.

Berthing in Levuka is generally effected starboard side to, outside Queens Wharf. Both dry cargo ships and tankers use the one berth available for overseas shipping at Levuka. Berth length 575 ft. Depth 18 to 34 ft. dependent on tide.

STEVEDORES: Estimated time of arrival of any vessel and tonnage of cargo to be discharged should be received at least 24 hours from time of arrival.

MEDICAL: Normal hospital facilities are available. Specialist services not available but can be arranged for within 24 hours. Smallpox, cholera and yellow fever valid Vaccination Certificates are required to be held by ship's crew and passengers except those coming from New Zealand, Australia, Gilbert and Ellice Islands, Tonga or Samoa.

TANKERS: Load and discharge lines 8 in. steel pipe. 1 berth only.

DENSITY: 1025.

FRESH WATER: Available only during normal working hours, which is from 0600 to 1600 from Monday to Thursday, and Friday up to 1500. Rate of delivery of water is about 15 t.p.h.

FUEL: Light marine diesel only – viscosity kin. at 100°F. = 3.4.

FIRE PRECAUTIONS: Bunkering only permitted during period between sunrise and sunset.

GANGWAY/DECK WATCHMEN: Services of watchman highly recommended to stop unauthorised persons from going on board.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CUSTOMS ALLOWANCES: All crew and officers will be issued, with 25 cigarettes per day. A maximum of 4 days' allowance may be given at any one time. Cigars or tobacco may be taken in lieu of cigarettes. Masters and other officers may be allowed to keep in their possession small quantities of liquor.

Daily allowances: spirits, 1 reputed quart to Master; beer, 2 reputed quarts to other officers; spirits, 0.25 reputed quart to other officers; beer, 2 reputed quarts to Master.

IDENTIFICATION CARDS: Required.

CONSULS: None.

REPAIRS: Minor engine repairs are possible, but deck and major engine repairs could be carried out at Port of Suva, which is about 57 miles away.

REPATRIATION: Facilities exist for repatriation.

AIRPORT: Is situated on island of Viti Levu and the distance is about 200 miles. It is served by regular airlines (international). Connections twice daily from local airport, 12 miles from port.

TIME 12 hours ahead of GMT.

HOLIDAYS: Working of cargo is not permitted on Sundays, Good Friday and Christmas Day. Application to work on Sundays to be made to the Ports Authority of Fiji at Levuka.

POLICE/AMBULANCE/FIRE: Police, 44033; Ambulance, 44015; Fire, 44041.

TELEPHONES: Arrangements may be made with Postmaster for installing telephone on board.

GENERAL: Rat guards must be affixed to all shore moorings or cables greased when alongside to prevent the advent of rats.

SHORE LEAVE: All crew members are allowed shore leave unless there is a special restriction from any Government authorities.

DELAYS: No berthing at night (lines cleared by quarantine authorities). Bunkering from sunrise to sunset. No loading or discharge during rain.

AUTHORITY: Port Authority of Fiji.

SUVA: 18.08 S. 178.26 E. (See Plan Book)

PORT LIMITS: A vessel is considered to be an "arrived vessel" having passed the W. Reef Beacon at the entrance to Suva Harbour.

DOCUMENTS:

1 Last Port of Clearance Certificate.
2 Declaration of Nett and Unregistered Tonnage form.
8 Passenger Lists.
8 Crew Lists.
6 Stores Lists (for high duty goods).
Passenger liners are required to submit Transit Passenger Lists and also a letter of Guarantee from Master.
Vaccination Certificates for Passengers and Crew.
Deratisation Certificates.

PILOTAGE: Arranged through vessel's Agents. 24 hours notice of ETA with confirmation 12 hours before arrival. Suva Harbour Control should be contacted on Channel 16 and 20 VHF when within VHF range. Pilot vessel is a white clipper bow launch with word "Pilot" in black on each side and will leave wharf 30 minutes before signalled ETA of vessel. Pilots board on leads 5 miles from front lead. Vessels may stand in on leads to meet pilot vessel. Vessels are advised to provide 2 manropes for pilot ladder which will usually be required on the port side. No anchorage for vessels awaiting a Pilot.

ANCHORAGES: Safe anchorage may be found in depths of 10 to 20 fathoms within the harbour. Holding is good, mud bottom.

RESTRICTIONS: Vessels may enter at any time of day or night.
MAX. SIZE: No length or draft limitation for conventional vessels entering port. Largest vessel regularly entering is 42,000 tons.
HEALTH: Health authorities require that vessels cable details of ports visited within 50 days of ETA. Radio pratique will be granted to vessels which are healthy and have not visited a port in a malarial area within 50 days. Health authorities board and inspect any vessel which has visited a malarial port within 50 days and will spray any vessel which has visited a malarial port. Authorities board from a launch as vessel enters harbour. Quarantine officer will sight Maritime Declaration of Health and Deratisation Certificate on boarding. No further pratique formalities are required in Fiji ports other than first port of entry.
RADIO: Suva Radio, call sign 3 DP. 500 Khz., 24 hours listening watch.
TUGS: 2 tugs available, one of 680 h.p. and one of 340 h.p. on request.
BERTHING: Vessels berth port or starboard side to King's Wharf or port or starboard side to Walu Bay Wharf as may be necessary. King's Wharf is 1,600 ft. in length, having a least depth alongside of 42 ft. at MLWS at the North end and 35 ft. at the South end, whilst Walu Bay Wharf is 600 ft. in length, having a least depth alongside of 31 ft. MLWS.
Vegetable oil: Vessels loading vegetable oils berth at Walu Bay or North King's Wharf.
LPG carriers: Berth North King's Wharf or Walu Bay.
STEVEDORES: Arranged by ship's Agents.
MEDICAL: Advance notice of medical assistance is desirable. Hospital facilities available. Current international vaccination certificates required.
TANKERS: Discharge lines 8 ins. diameter. Tankers discharge at King's Wharf, North and South berths. Depths alongside 42 ft. No residue discharge facilities.
DENSITY: Salt water, density 1025 approx. No tide effect on density.
FRESH WATER: Available at all berths. Delivery rate 30 t.p.h. per hose.
FUEL: Furnace fuel oil, diesel fuel oil, gas oil available by prior arrangement through oil company.
GANGWAY/DECK WATCHMEN: Employment of deck/gangway watchmen is recommended and normally provided by ship's Agents.
OPENING/CLOSING HATCHES: Normally opened and closed by stevedore labour but crew may be employed at Master's discretion.
CERTIFICATES:
Load Line.
Certificate of Registry.
Safety Equipment Certificate.
Radio Certificate.
Deratisation Certificate.
Maritime Declaration of Health.
CUSTOMS ALLOWANCES: 1 oz. tobacco per man per day. No alcohol.
IDENTIFICATION CARDS: Not compulsory.
CONSULS: The following countries are represented: Belgium, United States of America, Netherlands, France, Norway, Denmark, Sweden, Federal Republic of Germany, Great Britain, New Zealand, Australia and India.
REPAIRS: Engine and deck repairs may be carried out at local machine shops.
REPATRIATION: Facilities exist for crew changes and repatriation.
AIRPORT: 15 miles to Nausori (Suva) Airport, serving Pacific Islands on weekly basis. Numerous daily flights to Nandi International Airport.
TIME: Local time is 12 hours ahead of GMT.
HOLIDAYS: New Year's Day; Christmas Day; Boxing Day (Dec. 26th); Fiji Day (Oct. 10th); Prince of Wales' Birthday (17th Nov.); Queen's Birthday (14th June); August Bank Holiday (4th August); Good Friday; Easter Monday. Prophet Mohammad's Birthday February 20th, (1978), Deepawali October 31st, (1978). Cargo is not worked on public holidays.
POLICE/AMBULANCE/FIRE: Police, 23811; Ambulance, 23071; Fire, 22688; Emergency, 000 for any of the above services.
TELEPHONES: Telephone connections to ships are provided.
SERVICES: Compass adjusting may be carried out.
SHORE LEAVE: Allowed.
DELAYS: Delays are not usual except for rain during hurricane season from November to April.
AUTHORITY: Ports Authority of Fiji.

OUT PORTS OF SUVA: Customs and Pilot are embarked at Suva or Lautoka.

Ellington: 17.20 S. 178.14 E. Private wharf for loading sugar and molasses from Raki Raki Mill.

Labasa; 16.26 S. 179.22 E. Open roadstead at mouth of Labasa River where vessels load from lighters, sugar from S.P.S.M. Sugar mill.

Naikorokoro: North Coast of Kadavu. Anchorage for loading sawn timber.

Savu Savu: 16.47 S. 179.21 E. Government wharf for local coast trade and anchorage for cruise vessels.

Vatia Point: 17.25 S. 177.46 E. Private wharf for discharging explosives and fuel to gold mines.

NOTES

Please also advise Shipping Guides Ltd.

Finland

EKENAS/TAMMISAARI: 59.58 N. 23.26 E.

DOCUMENTS:

International or Finnish Measurements Certificate.
1 Personal Effects List.
1 Ship's Provisions List.
2 Crew Lists (passengers to be included).
1 Customs Declaration (official forms supplied by the Customs Authorities).
4 Manifests.
2 Bills of Lading.

PILOTAGE: Pilots for Ekenas/Tammisaari applied for at Hango Pilot station by approaching Pilot station outside Hango/Hanko, where Pilot boat will meet vessel right outside Pilot station.

Telegram address: Hango Pilot.

MAX. SIZE: Max. draft 15.1 ft. (4.6 m.). No other restrictions. At Skogby, draft up to 24 ft. – No tide.

RADIO: Hanko Radio, Call sign OFI.

TUGS: Normally no tugs stationed at Ekenas but can be arranged from nearest port.

BERTHING: Two quays at Ekenas: "Trakajen", length about 160 ft.; "Stenkajen", length about 500 ft.

"Stenkajen" is equipped with one shore crane with a lifting capacity of 5,000 kg. The shore crane is equipped with grab for lifting bulk cargoes such as coal, coke, china-clay and ball-clay. 2 mobile cranes, capacities 27 and 36 tons.

Situated about 6 nautical miles from Ekenas is Skogby Sawmill Quay. Depth alongside 24 ft. Skogby Sawmill exports sawn goods, mainly to U.K., both packaged and loose.

STEVEDORES: ETA to be given to Agent 1400 hours Finnish time on the day before arrival in order to prepare loading/discharging.

MEDICAL: Hospital treatment can be arranged when needed.

DENSITY: 1001.

FRESH WATER: Fresh water is delivered to the ship's side by means of hose. No possibility of fresh water at Skogby.

FUEL: No bunkering available at Ekenas.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CUSTOMS ALLOWANCES: 200 cigarettes permitted for each Crew member. 1 open bottle of 0.75 litre wine or spirit is allowed for each Crew member over 18 years of age.

IDENTIFICATION CARDS: Not needed.

REPAIRS: Minor electrical and deck repairs may be carried out.

AIRPORT: Nearest Airport is Helsinki Airport, situated about 100 kms. from Ekenas.

HOLIDAYS: On Saturdays and days preceding Church holidays, the eve of Independence Day, the day preceding May Day, on Whitsun Eve and on New Year's Eve the working day consists of four working hours, starting from 0700 or 0800 and lasting to 1100, 1200 hrs. resp. without break for meals. May Day, Independence Day, (6th December), Easter Saturday, Midsummer Eve and Christmas Eve are considered as labour free days.

POLICE/AMBULANCE/FIRE: Police, tel. 002; Ambulance, tel. 14100; Fire, tel. 005.

TELEPHONES: There are no arrangements for placing telephones on board the vessel but telephone calls can be made from the Harbour Constable's Office.

SUPPLIES: Ship stores and provisions can be ordered from Hango through Agent.

SHORE LEAVE: Shore leave allowed for crew members.

AUTHORITY: Harbour Master.

HAMINA: 60.34 N. 27.11 E. (See Plan Book)

PORT LIMITS: A vessel is considered to be an "arrived vessel" subject to Charter Party Terms, when arrived at roads.

DOCUMENTS: Normally required:

1 Crew List.
1 Passenger List.
3 Manifests.
1 Bill of Lading of each consignment.

Customs documents:

1 Special List (personal effects).
1 Provision List (Ship's Articles).

Ship's papers required:

Safety Equipment Certificate.
Radio Safety Certificate.
Construction Certificate.
International Tonnage Certificate.
International Load Line Certificate.
Certificate of Registry.
Tonnage Dues and Ice Dues Certificates if vessel called earlier.

PILOTAGE: Sea Pilot boards at Orrengrund, 36 miles from Hamina. VHF radio telephone Channel 16; Pilot boat: hull red, superstructure yellow. Vessels coming from Eastward can take Pilot at Haapasaari (Aspo), but must order Pilot by radio via Coast Radio Station at least 6 hours before ETA Haapasaari.

Harbour Pilotage: Harbour Pilot takes over at Roads. Harbour Pilot boat: hull black, superstructure yellow, word "Pilot" painted with red letters. Harbour pilotage optional.

ANCHORAGE: 2 anchorages with good holding grounds at Roads.

RESTRICTIONS: Usually no restrictions. Draft 9.0 m. to oil harbour and 8.4 m. elsewhere. Port open throughout year.

MAX. SIZE: Draft is governing factor. No tide but prolonged Easterly winds can cause lower water level, which must be checked before entering berths.

HEALTH: Bill of Health not required. In case suspected disease or fever on board, doctor to be contacted, preferably via Agent by radio before arrival.

RADIO: Vessels in Baltic Sea usually contact Helsinki radio/OHC, A1 and OHG, A3. VHF Channels 16 and 26. Vessels in Eastern part of Gulf of Finland contact Kotka radio/OHF, A1 and OFU, A3. VHF Channels 16, 25 and 27.

RADAR/VHF: There is no land radar service. Harbour is equipped with VHF radio telephone, Channels 16 and 12.

TUGS: Join vessels at Roads. Ship's lines usually used.

BERTHING:

Quay	*No.*	*Normal Landing Draft (m.)*	*Length (m.)*
Tervasaari	1–2	4.0	131
Hailikari		3.9	62
Coalquay		7.0	345
Kaukas	1–3	7.9	216
Kaukas-Hackman	1–5	5.2–5.5	365
Rauma-Repola	1–2	3.6	140
Enso-Gutzeit	1–2	7.9	240
Hiirenkari	1–2	7.9	158
	3–5	8.4	310
	Ro/Ro	7.0 & 8.4	
Roads		7.9	
Outer roads		9.0	
Oil harbour		9.0	

SPECIALISED CARGO HANDLING FACILITIES: Coal and bulk quay has a length of 345 m. and loading depth of 7 m.; 5 electric cranes, the lifting capacity from 5 to 6.5 tons.

Container crane 33 tons capacity. Sawn timber quays 3–6 m. draft.

Roll-on/roll-off berths 7 m. draft.

CRANES:

	No.	*Capacity/Tons*	*Type*
Coal quay	3	5	
	2	6.5	
	12	2–30	mobile
Hiirenkari quay	1	33	container

STEVEDORES: ETA is expected in good time before arrival.

MEDICAL: Advance notice helpful but not compulsory. Hospital facilities available at town.

TANKERS: Ocean-going tankers effect discharging through stern pipe-line. Mooring with both anchors, and stern to quay. Tankers up to 2,000 d.w.t. can discharge through side lines. Heavy oil and light products discharged into 10 in. line through hose of 8 in. No slop tank available. 1 tanker berth, draft 9 m.

DENSITY: 1003.

FRESH WATER: Available at majority of quays; elsewhere supplied by boat.

FUEL: Fuel and diesel oils available at short notice. Delivery by tank truck.

GANGWAY/DECK WATCHMEN: Shore watchmen available, Sundays and holidays 100% extra.

OPENING/CLOSING HATCHES: Crew close automatic hatch covers. Hatches to be covered manually are usually covered by stevedores.

CUSTOMS ALLOWANCES: Tobacco: Master 200 cigarettes or 200 grams tobacco. Others, 100 cigarettes or 100 grams tobacco. Wine and/or Spirit: Master, 3 bottles wine or spirits. Others, one bottle.

CONSULS: Great Britain, Denmark, Holland, Norway, Sweden.

REPAIRS: Minor repairs effected.

REPATRIATION: There are facilities for repatriation.

AIRPORT: Helsinki Airport, distance 145 km. Regular flights.

TIME: Local time is GMT plus 2 hours. No alterations during year.

HOLIDAYS: New Year's Day (Jan. 1); Epiphany (Jan. 6); Good Friday; Easter Monday; Labour Day (May 1); Ascension Day; Whit Monday; Midsummer Day; All Saints' Day; Independence Day (Dec. 6); Christmas (Dec. 25 and 26).

POLICE/AMBULANCE/FIRE: Police 002; Ambulance 41304 and 43111; Fire 005.

TELEPHONES: None available for placing on board.

REGULATIONS: Regular terminal vessels have preference at certain berths.

AUTHORITY: Haminan Kaupungin Satamalaitos.

HANKO: 59.49 N. 22.58 E.

DOCUMENTS:

Ship's Register.
Crew List.
Manifests.
Bills of Lading.
Provisions List.
Health Certificate.

PILOTAGE: Compulsory, distance from sea to port is 6 miles. Pilot boat painted red, arriving outside Russaro called by radio via Hanko Radio or by flag, sound or Morse: "G".

ANCHORAGE: Inside Gustavsvarn.

RESTRICTIONS: Draft 26.5 ft., length/breadth no restriction; no tide.

RADIO: Cable Agents giving ETA via Hanko or Helsinki Radio.
RADAR: At Pilot station; service for ships entering port, contact by ship's radio.
TUGS: In Winter time harbour tug boat helps ships to and from the quay.
BERTHING: Advise Pilot. Depths at piers 19-29 ft. Quay height about 6 ft. above sea level. Shore fenders keep vessel about 2 ft. off quay. Special quays for roll-on/roll-off traffic.

Quay	*Permitted draft in feet*	*Length of quays metres*
Germany	22	150
Great Mole	25	704
Notholms	25	425
Free Harbour	25	170
Kone Oy	20	125 railway connection and shore cranes

CRANES:

	No.	*Capacity/tons*	*Type*	
Great Mole	1	2.5	Movable	
	1	6	,,	
	2	3	,,	
Notholms quay	2	2.5	,,	
	2	5	,,	1 with grabs
	1	40	,,	

Free harbour: One mobile crane, lifting capacity 40 tons. 21 fork lift trucks available.
STEVEDORES: Ordered by Agents.
FRESH WATER: Delivered from shore installations at daytime. Rate of delivery about 20 t.p.h.
FUEL: Delivered by rail cars only.
DENSITY: 1005.
WATCHMEN: Available but not compulsory.
HATCHES: Crew allowed to open and close hatches.
CUSTOMS ALLOWANCES: No restrictions in the Free Port, outside about 200 cigarettes and limited amount spirits per man.
IDENTIFICATION CARDS: Not required.
CONSULS: Denmark, Iceland, Netherlands, Norway, Spain, Sweden.
REPAIRS: Small repairs possible.
TIME: Local time GMT plus 2 hours.
TELEPHONE: Police 003; Fire 005; Ambulance 82228.
AUTHORITY: Harbour Master.

HELSINKI: 60.10 N. 24.57 E. (See Plan Book)

DOCUMENTS: See "Oulu".
PILOTAGE: Compulsory. ETA required 24 hours prior arrival. At present there are 2 different channels available for vessels approaching Helsinki.

1. Helsinki Lighthouse–Harmaja Lighthouse–Helsinki. Waterway leading from sea via Helsinki Lighthouse, situated in Gulf of Finland off the islets and shoals South of the port of Helsinki at a distance of about 12 miles may be considered as main approach. Channel navigable by vessels with a draft up to 9.6 m. (31 ft. 6 in.). Obtain Pilot from Pilot station at Harmaja. Vessels using main channel from Helsinki Lighthouse should keep Harmaja Lighthouse in line with church tower of Suomelinna, bearing about 7°. The Islet of Harmaja not navigable without a Pilot further in than 2 miles.
2. Porkkala-Helsinki. Fairway runs by Porkkala Lighthouse along the Eastern coast of Porkkala peninsula. Navigable by vessels with a max. draft of 9 m. (29 ft.). Pilots obtained from Porkkala-Ronnskar.

Harmaja Sea-Pilot station: Tel. 668 203. Harbour Pilots at Harbour Office: Tel. 634 308.
ANCHORAGE: Good anchorage available outside harbour, depth 26-32 ft. clay bottom.
MAX. SIZE: Draft 31 ft., length no limit.
HEALTH: See "Oulu".
DIRECTION FINDING: Harmaja Radio Beacon (frequency 298.8 kc/s Signal "HA") transmits:

Non-directional radio signals, with a modulation frequency of 395 c/s. By listening to these signals with a direction finding receiver, equipped with frame aerial, a ship can determine her bearing to the beacon.
DEPTH OF CHANNELS:
(1) From Porvoo via Kuggsund and Hevossalmi Canal 2.4 m.
(2) From Porvoo to outer roads via Kalvo and straits at Kustaanmiekka 7.3 m.
(3) From Pellinki to Helsinki 9.0 m.
(4) From Helsinki Lighthouse to Helsinki 9.6 m.
(5) From Barosund to Helsinki outer route 5.5 m.
(6) From sea South via Porkkala 9.0 m.
VHF: Harmaja Pilots and Porkkala Pilots call VHF Channel 16 or 13.
TUGS: Several available: charges based upon time when tug leaves station berth until moment of return to same station.
BERTHING: Port and equipment owned by Municipality of Helsinki. 5 principal parts of port are South and West Harbours, Sornainen Harbour, and Herttoniemi and Laajasalo Oil Harbours. North Harbour serves only passenger-launch traffic to surrounding islands.

Foreign passenger traffic is concentrated on the South Harbour. Piece-goods traffic is also handled on Katajanokka quay.

West Harbour handles main part of transoceanic traffic, heavy goods and bulk cargoes, also silos of 2 flour-milling plants (Vaasan Hoyrymylly Oy and State Granary), into which grain discharged by suction. On silo quay pneumatic grain unloader owned by State Granary travels along 71 m. long bridge alongside ship to be unloaded. Equipment is 30 m. above quay level and range of suction pipe 11 m. from edge of quay. Unloading equipment can handle 100 t.p.h. Mass export articles such as cellulose, paper and wood goods, loaded chiefly in this harbour. In West Harbour is free-zone warehouse, which offers same privileges as free port.

The Sornainen Harbour operates mainly as a North Sea piece-goods harbour. The area contains a coal harbour.

Herttoniemi and Laajasalo form the oil harbour, where the leading oil companies have oil storage tanks and own piers.

See Table below.
BULK HANDLING FACILITIES: Specially equipped berths for handling bulk cargoes in Sornainen Harbour. Berths equipped for containers or roll-on/roll-off traffic in West Harbour (40-ton container crane) and Sornainen Harbour.
STEVEDORES: 24 hours ETA required. 5 companies available of which 2 specialise in discharging timber and coal.

Working hours; Weekdays, 0700–1600 hrs. and 1600–2230 hrs. Saturdays, 0700–1500 hrs. Lunch break weekdays and Saturdays 1100–1130 hrs.
MEDICAL: Agents to be informed by radio if fever suspected.
TANKERS: Max. draft 31 ft.

Herttoniemi and Laajasalo form together the oil harbour of Helsinki, where the leading oil companies have oil tanks and their own piers.

Harbour	*Quay length (m)*	*Depth alongside (m)*	*Depth of channel (m)*
Herttoniemi Oil Harbour:			8.0
Oil pier	2×96	8.6	
Oljynpuristamo Co's pier	100		
Elo Co's pier	24		
Laajasalo Oil Harbour:			9.6
Shell Co's pier	32	10.0	
Esso Co's pier	30	10.6	
Neste Co's pier	58	10.2	

DENSITY: Fresh water.
FRESH WATER: Unlimited amount available by hoses from Hydrants at quays.
FUEL: All grades available; any amount of short notice.
GANGWAY/DECK WATCHMEN: Recommended but not necessary.
OPENING/CLOSING HATCHES: Crew/Stevedores.
CUSTOMS ALLOWANCES: 200 cigarettes, 1 bottle wine or spirits each man.
IDENTIFICATION CARDS: Not needed.
CONSULS: All maritime countries are represented in Helsinki.
REPAIRS: All types available.
DRY DOCKS: *Valmet Oy Helsinki Shipyard:*

Dock	*Extreme length (m.)*	*Breadth at entrance (m.)*	*Depth on sill (m.)*	*Location*
Dry dock 1	120	18	6.5	Suomenlinna
Dry dock 2	141	15	4.9	Suomenlinna
Dry dock 3	380	56	8.5	Vuosaari

Dock	*Extreme length (m.)*	*Max draft above keel (m.)*	*Lifting power tons*	*Location*
Floating dock	165	28	12,000	Vuosaari

Oy Wartsila Ab Helsinki Shipyard:

Dock	*Extreme length (m.)*	*Breadth at entrance (m.)*	*Depth on sill (m.)*	*Location*
Dry dock 1	142	20	6.6	Hietalahti
Dry dock 2	208	34	9.5	Hietalahti

REPATRIATION: Available.
AIRPORT: Distance to airport 25 km. Flights every day all over Europe.
TIME: GMT plus 2 hours. No alterations.
HOLIDAYS: New Year's Day (1st January); Epiphany; Good Friday; Easter Monday; Workers' Holidays (1st May); Ascension; Whit Monday; Midsummer Day; All Saints' Day; Independence Day (6th December); Christmas Eve; Christmas Day (25th December); Boxing Day (26th December).
POLICE/AMBULANCE/FIRE: Police 002; Ambulance 006; Fire 005. General alarm 000.
TELEPHONES: Facilities for linking up vessels to telephone network available on all of the most important quays. Apparatus handed over to vessel by port official on duty for purpose, who also gives its number. Charge for annual contract is 600 mks per vessel. For short-term use charge is 20 mks a day and 50 mks a month. Charge entitles to unlimited local calls. Trunk calls charged separately.
SERVICES: Compasses are adjusted by competent adjusters approved by the Board of Navigation. For compass adjustment the port has constructed piles or buoys with direction markings. These appliances can be used also for radio direction-finders.

Vessels using the compass-adjustment facilities must have on board a Harbour Pilot, who is entitled to the same compensation as for harbour pilotage.

South Harbour:

					Lifting cranes and ramps		
South Harbour		*Length (m.)*	*Depth[1] (m.)*	*Depths[2] alongside (m.)*	*Number and type of crane*	*Lifting capacity tons*	*Radius (m.)*
Olympia Quay	LP 1[3]	150	6.9	7.5	Hydraulic ramp		
,, ,,	LP 2[3]	190	6.9	7.5	Ramp		
Makasiini Quay	LP 3	130	7.9	7.5	,,		
,, ,,	LP 4	140		7.0	,,		
Pakkahuone Quay		135		5.5			
Lubeck		30		2.5			
,,		65		3.5			
Keisarinluoto Quay		75		3.0			
,, ,,		37		3.0			
Linna		96		3.0			
Katajanokka		70		3.5			
,, ,,	LP 5[4]	170	7.9	8.5	6 Portal cranes, floating ramp	1.5–3	24
,, ,,		170	7.9	9.0	2 ,,	3–6	24
,, ,,	LP 6[5]	174	7.9	9.0	5 Portal cranes, ramp	1.5–3	24
,, ,,	LP 7[5]	220	7.9	8.5	Hydraulic ramp		
,, ,,		280	9.1	9.1			
Private Pier		37		6.5			

		Ramp details				*Vessel details*	
Quay		*Height above mean water*	*Width*	*Centre line from quay side*	*Max. load permissible if restricted*	*Min. depth from mean water mark to bottom*	*Remarks*
Olympia Quay							
Hydraulic ramp	LP 1	1.7 m.–3.25 m.	12.0 m.	10.0 m.	70 tons	7.5 m.	For car and passenger ferries
Ramp	LP 2	2.1 m.	9.0 m.	11.0 m.		7.0 m.	
Makasiini Quay							
Ramps	LP 3 and LP 4	1.55 m.–2.1 m.	16.5 m.	8.2 m.		7.5 m.	,,
Katajanokka Quay		Height above waterline					
Floating ramp	LP 5	2.0 m.–2.5 m.	9.0 m.	8.0 m.		8.5 m.	,,
Ramp	LP 6	1.4 m.–2.0 m.	20.0 m.	10.0 m.		9.5 m.	,,
Hydraulic ramp	LP 7	1.4 m.–3.1 m.	13.0 m.	11.0 m.		8.9 m.	,,

[1] To be mentioned only if the fairway is shallower than the depth near the quay. [2] Minimum depth from mean water mark to bottom. [3] Olympia terminal. [4] Passenger terminal K5. [5] Katajanokka terminal.

West Harbour

					Lifting cranes and ramps		
West Harbour		*Length (m.)*	*Depth[1] (m.)*	*Depths[2] alongside (m.)*	*Number and type of crane*	*Lifting capacity tons*	*Radius (m.)*
Salmisaari Quay		124	7.3	8.0		6	21
Tammasaari Quay		135	6.9	7.8	Cranes for coal:		
Electricity Works Oil Quay		60	8.9	10.0	2 Portal cranes[3]		
Jaalaranta Quay		50		3.9			
Saukko Quay		455	8.9	5–8.5			
,, ,,		72		5–7	1 Container crane for 20 ft.–40 ft. containers	40	28
Jatkasaari Quay		120		3.5–5.0	Cranes for general cargo:		
,, ,,		190		6.8	2 Half portal cranes	1.5–3.0	16.5
,, ,,		70		7.2	10 ,, ,, ,,	1.5–3.0	21
,, ,,		120		7.5	2 ,, ,, ,,	1.5–3.0	21.3
,, ,,		170		8.8	1 Stationary crane	25	16
,, ,,		115	8.9	9.0	4 Half portal cranes	3.0–6.0	21
,, ,,		135	8.9	9.5	3 ,, ,, ,,	3.0–5.0	28
,, ,,	LP 1	155	8.9	9.0	6 Portal cranes	3.0–5.0	28
,, ,,	LP 2	260	8.9	9.8	Hydraulic ramp		
Sampo Quay		187		5.5			
Valtameri Quay	LP 3	210	8.9	9.0	Ramp		
Silli Quay		177		3.4–6.6			
Hietalahti Quay		165		6.5–7.0			
Munkkisaari Quay		195	8.9	7.4–8.2	Pneumatic grain unloader[4]	100 t.p.h.	
,, ,,		165	8.9	7.5			
Hernesaari Quay		260	8.9	7.3	Ramp		
Rudus Quay[5]		2×24					

		Ramp details				*Vessel details*
Quay		*Height above mean water*	*Width*	*Centre line from quay side*	*Max. Load permissible if restricted*	*Min. depth from mean water mark to bottom*
Jatkasaari Quay						
Hydraulic ramp	LP 1	1.05 m.–4.15 m.	17.0 m.	11.0 m.	2×60 tons	8.9 m.
Ramp	LP 2	2.5 m.–2.9 m.	20.5 m.	10.3 m.		8.9 m.
Valtameri Quay						
Ramp	LP 3	1.5 m.–2.6 m.	21.1 m.	13.5 m.		8.9 m.
Hernesaari Quay						
Floating ramp		Height above waterline 2.3 m.–3.0 m.	11.4 m.	10.0 m.	70 tons	7.6 m.

[1] To be mentioned only if the fairway is shallower than the depth near the quay. [2] Minimum depth from mean water mark to bottom. [3] Belonging to the municipal electricity works. [4] Belonging to the state granary. [5] Private.

Sornainen Harbour

					Lifting cranes and ramps		
Sornainen Harbour		*Length (m.)*	*Depth[1] (m.)*	*Depths[2] alongside (m.)*	*Number and type of crane*	*Lifting capacity tons*	*Radius (m.)*
Hanasaari Quay		170		7.9	4 Portal cranes for discharging		
,, ,,		225		8.2	of coal[3]	6.0	24.0
,, ,,		160	8.4	9.6	1 Stationary crane	150.0	22.1
,, ,,		93	8.4	8.5		50.0	30.0
						30.0	32.0
Oy Parainen Quay[4]		100		5.5	2 Portal cranes with grab & hook	6.2	24.0
Parru Quay	LP 1A			7.0	Hydraulic ramp		
Ferry-berth	LP 1	150		8.2	Ramp		
Sompa Quay		500		8.2	Cranes for general cargo:		
					6 Portal cranes	3–5	28.0
Ferry-berth	2 LP 2	110		7.0	Ramp		
,, ,,	3 LP 3	140		7.5	Hydraulic ramp		
Sompa Eastern Quay		399	6.1	5.5	Cranes for general cargo:		
					2 Portal cranes	3–5	28.0

			Ramp details			Vessel details
Quay		*Height above mean water*	*Width*	*Centre line from quay side*	*Max. load permissible if restricted*	*Min. depth from mean water mark to bottom*
Parru Quay						
Hydraulic ramp	LP 1A	0.6 m.–3.7 m.	17.0 m.	11.0 m.	2×60 tons	7.0 m.
Ramp	LP 1	1.2 m.–5.6 m.	9.4 m.	10.8 m.	54 tons	8.2 m.
Ferry Berth						
Ramp	LP 2	1.4 m.–2.5 m.	14.0 m.	10.0 m.		7.0 m.
Hydraulic ramp	LP 3	1.3 m.–4.2 m.	15.0 m.	13.0 m.	2×60 tons	7.5 m.

[1] To be mentioned only if the fairway is shallower than the depth near the quay. [2] Minimum depth from mean water mark to bottom. [3] Belonging to the municipal electricity works. [4] Private.

CLASSIFICATION SURVEYORS: Lloyd's Register of Shipping, Bureau Veritas, American Bureau of Shipping, Germanischer Lloyd, Det Norskey Veritas.

ICEBREAKERS: *Teuvo*, length 39.9 m., breadth 12.9 m., fitted with 2 combined water/foam cannons for firefighting purposes, total capacity of 300 cu. m. per hour. VHF-telephone: call OIEV.

During ice seasons one of the following Government icebreakers assigned to assist ships from open water to harbour area and vice versa:

	Length (m.)	*Breadth (m.)*
Varma	86.5	21.2
Apu	86.5	21.2
Tarmo	84.0	20.5
Voima	83.5	18.7
Sampo	74.1	16.7
Murtaja	74.1	16.7
Karhu	74.1	16.7
Hanse	74.1	16.7
Sisu	104.7	23.8
Urho	104.7	23.8

Masters should communicate with icebreakers between January and March.

AUTHORITY: Port of Helsinki Authority.

INKOO: 60.01 N. 23.55 E.

PILOTAGE: Pilot boards off Ronnskar Lighthouse (Tel. Helsinki 294112, telephone and VHF). Distance to Coal Harbour 18 miles, Oil Harbour 17 miles.

MAX. DRAFT: *Approaches:* Fairway to Coal Harbour 29 ft. 6 in. Fairway to Oil Harbour 32 ft. 10 in.

TUGS: Available any time. 1 tug stationed at Inkoo.

BERTHING: Coal Quay length 175 m.; depth alongside 25 ft. 6 in.
Paper Quay length 140 m.; depth alongside 25 ft. 6 in.

CRANES: On the Coal Quay, one crane, 10 tons and one crane, 6 tons, by hook and half of the capacity by grab. Mobile cranes to hire of several capacities on Paper Quay.

DENSITY: 1004.

FRESH WATER: Available.

JAKOBSTAD (Alholmen): 63.42 N. 22.42 E.

(See Plan Book)

DOCUMENTS:

International Measurement Certificate.
3 Manifests.
2 Bills of Lading of each consignment.
Customs Documents:
1 Crew List.
1 Special List (personal effects).
1 Provision List (ship's articles).

Important: If the vessel is calling at two or more Finnish ports, 2 of each of these lists are to be produced at the first port of call.

PILOTAGE: VHF Channel 16, MF 2182 kHz. Anchorage for vessel awaiting a Pilot: outside the lighthouse "Kallan". Pilot boat equipped with radar.

ANCHORAGES: On inner roads called "Ado Roads", depth of water 28/30 ft.

MAX. SIZE: Max. draft in the inner harbour 24 ft. 3 in. No tide.

HEALTH: See "Oulu".

RADIO: Vasa Radio Station. Gamlakarleby/Kokkola VHF Channel 28.

TUGS: Tugs are normally stationed in the harbour. Ship's lines to be used.

BERTHING: Laukko Pier. Length 2×100 m., depth 24 ft. 3 in.
New Quay. Length 200 m., depth 24 ft. 3 in.
Old Quay. Length 300 m., depth 17 ft. (inside) 19 ft. (outside).
Kantlax, Oilport. Depth 7 m.
Busto Quay (roll-on/roll-off) length 160 m., depth 24 ft. 3 in.
Cranes: 8 mobile cranes available.

STEVEDORES: Working time: 1st shift Monday-Saturday 0700–1600 hrs. (meal hours 1100–1200); 2nd shift Monday-Friday 1600–2400 hrs. To commence loading at 0700 hrs. notice must be given latest at 1600 hrs. the day before, or before 1200 hrs. if commencing at 1600 hrs.

MEDICAL: Advance notice not required. All facilities available.

TANKERS: Vessel's draft must not exceed 24 ft. 3 in.

DENSITY: Fresh water.

FRESH WATER: From pipe-line alongside quay.

FUEL: Only gas oil available.

GANGWAY/DECK WATCHMEN: Watchmen recommended.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CERTIFICATES: Derat. Certificate to be kept on board.

CUSTOMS ALLOWANCES: Tobacco: 100 cigarettes per 3 days for each crew. Wine and/or Spirits: 1 bottle per 6 days for each man of 21 years age.

IDENTITY CARDS: Not needed.

CONSULS: Danish, Tel. 10144; Norwegian 10444; Swedish 10444.

REPAIRS: All types of repairs possible.

DRY DOCKS: Only a small slipway.

REPATRIATION: Crew changes can be effected.

AIRPORT: Kronoby Airport about 30 km. from Jakobstad. 2 flights daily.

TIME: The local time is 2 hours later than GMT.

HOLIDAYS: 1st and 6th January; Good Friday; Easter Eve; Easter Monday; Labour Day (1st May); Ascension Day; Midsummer Eve; Whit Monday; 6th December (Independence Day); 25/26th December All Saint's Day.

POLICE/AMBULANCE/FIRE: Police 10039; Ambulance and Fire 10055.

TELEPHONES: Connection for telephone on board available.

AUTHORITY: Harbour Master.

AGENT: Wilkman & Lenander Ab, POB 6, SF-68601 Jakobstad, Finland. Telex 7516 (answer back: 7516 wilkm sf). Tel. 10148, 10278. A.O.: 12171. Shipbrokers, Liner Agents, Forwarding Agents.

KASKO (KASKINEN): 62.23 N. 21.13 E.

DOCUMENTS:
2 Crew Lists.
2 Customs Lists.
2 Passenger Lists.
Manifest, Bill of Lading, etc.
Between 1st December/30th April Iceclass Certificate required (can be given in Kasko).

PILOTAGE: Pilot boards 4 miles outside Pilot station. Pilot boat or station can be called by radio telephone 2182 or VHF Channel 16. Notice is not required. Pilot can be called, daytime flag "G" or "PT", night-time by Morse "PT".

ANCHORAGE: Safe areas of anchorages, 3 miles W.S.W. of Pilot station Salgrund, depths 15–20 m.

MAX. SIZE: Max. draft 8 m.

HEALTH: Pratique automatic.

RADIO: Vasa Radio.

VHF: VHF Channel 16 (Salgrund Pilot).

TUGS: None.

BERTHING:

Deep Harbour Quay	Depth	27 ft.
Outer Harbour Quay	,,	22 ft.
Inner Harbour Quay	,,	23 ft.

Total length of quays 2,694 ft.

DENSITY: 1004.

STEVEDORES: Available; rates about 250-300 tons pulp per work gang.

MEDICAL: Hospital available.

FRESH WATER: Brought by truck Winter-time; Summer by pipeline.

FUEL: Available by tank truck.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes. Wine/Spirit: 1 bottle spirit.

CONSUL: Swedish Consul, Tel. 427.

REPAIRS: Only small repairs.

AIRPORT: Distance to Vasa Airport 100 km. Served by regular airlines.

TIME: GMT plus 2 hours.

HOLIDAYS: See "Oulu".

POLICE/AMBULANCE/FIRE: Police 002; Ambulance 300; Fire 005.

TELEPHONE: Can be connected. No cost for connection.

GENERAL: Port is the most Northern in Finland which under reasonable conditions can be kept open throughout Winter.

AUTHORITY: Harbour Office.

KEMI: 65.44 N. 24.33 E. (See Plan Book)

PILOTAGE: Pilot boards from Lighthouse "Kemi I" or Lighthouse Nukkujanmatala. VHF and radio telephone watch maintained. Pilotage distance: Ajos 17 miles; Veitsiluoto 22 miles.

MAX. SIZE: Sea to Fairway at Ajos. Max. draft 10 m. Sea to Fairway at Veitsiluoto. Max. draft 7.3 m. Also see "Berthing".

TUGS: Icebreaker tugs of 3,500 h.p. and 900 h.p.

BERTHING:

Quays:	*Length (metres)*	*Depth (metres)*	*Permitted draft (metres)*
Oil Quay	90	10.5	10
No. 1	420	7.5-8.5	7-7.8
No. 2	315	4.7-9.5	4-8.8
No. 3	185	6.0	5.2
No. 4	168	6.0	5.2

CRANES: Mobile cranes. 2×6 tons capacity; 2×55 tons capacity; 18×5-25 tons capacity.

FRESH WATER: Available at Quays Nos. 1 and 2.

FUEL: Available.

DENSITY: Fresh water.

AUTHORITY: Harbour Master and Assistant Harbour Master.

KOKKOLA: 63.50 N. 23.08 E.

PILOTAGE: Pilot boards from Pilot Station at Tankar (Tel. Kokkola 16160, radio-telephone and VHF). Distance to the port 12 miles.

MAX. DRAFT: From sea to Fairway 9.25 m.

TUGS: 2 tugs available: 350 h.p., 1,500 h.p.

BERTHING:

Quay	*Length*	*Depth*
New Stone Pier	140 m.	24 ft.
Oil Jetty		30 ft. 6 in.
New Quay (South side)	323 m.	30 ft.
(North side)	106 m.	26 ft.
Industrial Port	210 m.	30 ft. 6 in.
Old Quay		20 ft.
General Cargo Quay		14 ft. 6 in.

CRANES: Two 8-ton cranes at the New Quay and 11 mobile cranes 3-20 tons capacity.

FRESH WATER: Available.

DENSITY: 1002.

KOTKA: 60.28 N. 26.57 E. (See Plan Book)

DOCUMENTS:
Crew List.
Passenger List.
1 copy of Cargo Manifest.
1 copy of every Bill of Lading.
Ship's Register.
Ice Certificate.
Customs Manifest for Stores, for ship and individual.

PILOTAGE: On arrival off Orrengrund, contact Orrengrund Pilot by VHF. On arrival off Kotka, contact Harbour Pilot Kotka, VHF Channels 11, 13, 14, 16. Depth in approaches 32ft. 10in.

ANCHORAGES: Havouri roads, Kukouri roads and at the entry to the harbour. All 39ft. 6in. depths.

MAX. SIZE: Max. draft 32ft. 10in.

HEALTH: In case of sickness on board, contact the Agents before entering the port.

RADIO: Kotka radio call sign OHF.

TUGS: Tugs normally join the vessel in the harbour entrance. Ship's lines are to be used. 3 tugs available, 1,650 h.p., 810 h.p. and 630 h.p.

BERTHING:

Quay	*Permitted Draft (ft.)*	*Length (Metres)*
Central Harbour	16-24	1,000
North Quay	21-22	226
Middle Quay	25-29.5	540
East Quay	24-29.5	380
Bulk Quay (Polish Quay)	27.5	360
Sunila Quay	22-26	160 (26 ft.)
		240 (20 ft.)
Inner Roads	12-24	
Outer Roads	25-29	
Halla, East Harbour	14-23	250
West Harbour, Roads	24	
Oil Harbour	29-33	
Oy Valmet AB.	16-24	155
State Railways		
Oil Quay	17.5	40
Power Plant (Mussalo)	26	200
Oil Quay	33	
Hietanen Terminal Harbour	26-33	475

CRANES: 31 shore cranes with capacity of 3-60 tons.

SPECIALISED CARGO-HANDLING FACILITIES: Hietanen terminal harbour, consisting of 3 ro-ro berths and 2 conventional berths.

MEDICAL: Master to advise by Radio Kotka on arrival if medical attendance required aboard.

TANKERS: 3 tanker berths, draft 32ft. 10in.

DENSITY: 1.0033.

FRESH WATER: East port and oil port are equipped with water pipe-lines, but in Sunila port only supplied by tugs.
Shipmasters Report: 1978. Fresh water available at all berths.

FUEL: All grades of fuel available.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Normally by the crew.

SHIP CERTIFICATES: List of Certificates to be on board:
Passenger Ship Safety Certificate.
Cargo Ship Safety Construction Certificate.
Cargo Ship Safety Equipment Certificate.
Cargo Ship Safety Radio-telephone Certificate.
Cargo Ship Safety Radio-telegraphy Certificate.
Exemption Certificate.
Nuclear Passenger Ship Safety Certificate.
Nuclear Cargo Ship Safety Certificate.
Derat Certificate.

CUSTOMS ALLOWANCES: For passengers: Tobacco: 200 cigarettes or 0.2 lb. of other manufactured tobacco. Wine and Spirits: 1 litre.

IDENTIFICATION CARDS: Not required.

CONSULS:

Great Britain	Tel. 16 160	Belgium	Tel. 15 400
Iceland	Tel. 12 178 or 12 175	Denmark	Tel. 11 160
Italy	Tel. 61 286	Netherlands	Tel. 11 200
Norway	Tel. 17 220 or 15 220	Spain	Tel. 15 220
France	Tel. 15 400	Sweden	Tel. 15 220

REPAIRS: All types of repairs can be carried out.

DRY DOCKS: 3 floating docks. Docking dimensions for vessels:
Valmet: length 127.2 m., beam 20.1 m., draft 6.8 m./5,000 tons.
Wartsila: length 130 m., beam 19.7 m., draft 5.8 m./4,500 tons.
Wartsila: length 96 m., beam 16.5 m., draft 4.5 m./2,500 tons.

REPATRIATION: Facilities exist.

AIRPORT: Nearest Helsinki–Vantaa, 140 km.

TIME: GMT plus 2 hours.

HOLIDAYS: New Year's Day (Jan. 1st); Epiphany (Jan. 6th); Moving Holidays; Easter Holiday, 4 days (Sunday included); Ascension Day, 1 day; Whitsunday, 2 days (Sunday included); Midsummer Day, 3 days (Sunday included); All Saints Day 1 day (first Saturday of Nov.); Christmas Holidays (Dec. 24th-26th). Other free days: May 1st; Dec. 6th (Independence Day). Cargo work can be done on all above holidays.

POLICE/AMBULANCE/FIRE: Police 002; Ambulance 006; Fire 005.

TELEPHONES: On some berths telephones placed on board.

GENERAL: It is prohibited to let or throw any substance or refuse causing pollution or shoaling in the harbour area.

SERVICES: Compass adjusting service available.

SHORE LEAVE: No restrictions.

AUTHORITY: Port Authority of Kotka.

KOVERHAR: 59.52 N. 23.13 E.

DOCUMENTS:
- Ship's Register.
- Crew List.
- Manifests.
- Bills of Lading.
- Provisions List.
- Health Certificate.

PILOTAGE: Compulsory. There are 2 approaches: (1) Via Ajax, max. draft in fairway 33 ft. Pilot arrives from Pilot station at Hanko. Distance to port 11 miles.

(2) Via Hanko, max. draft in fairway is 28 ft. Pilot arrives from Pilot station at Hanko, Tullудden (Tel. Hanko 82246, radio-telephone, VHF). Station has radar. Distance to port 23 miles.

MAX. SIZE: Max. draft alongside quay 30 ft. Max. LOA 190 m. Max. Breadth 23 m. No tide.

RADIO: Cable Agents giving ETA via Hanko and Helsinki Radio.

TUGS:

Kurt 450 h.p.	*Wilpas* 400 h.p.
Ingrid 700 h.p.	*Waija* 1,850 h.p.

BERTHING: Length 250 m., depth 30 ft. Quay 6 ft. above sea level.

New berth, length 120 m., depth 30 ft. Quay 6 ft. above sea level.

CRANES: Two of 13 tons and one of 12.5 tons capacity.

STEVEDORES: Ordered by Agent.

FRESH WATER: Available rate 20 cbm./hr.

OPENING/CLOSING HATCHES: By crew.

CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle of spirits per man.

IDENTIFICATION CARDS: Not required.

REPAIRS: Small repairs possible.

TIME: GMT plus 2 hours.

POLICE/AMBULANCE/FIRE: Police 002; Ambulance 12660; Fire 43100.

AUTHORITY: Harbour Master.

KRISTINESTAD: 62.16 N. 21.23 E.

DOCUMENTS:
- Ship's Measurement Certificate.
- 2 Crew Lists.
- Cargo Manifest.
- Copy Bill of Lading.
- 2 Provision Lists and Tobacco Lists for Customs.
- Ice Certificate 1.12–3.4.

PILOTAGE: Pilot boards at Hojerstein light buoy. At least 2 hours ETA required. Pilot boat has red painted hull, white marking "L" on bow, and deck house yellow. Pilot station situated on Hoggklubb Island South of Kristinestad, International pilot call signals to be used, also radio telephone 2182 and VHF Channel 16.

ANCHORAGE: Good safe holding ground off Adgrund. Depth 10 m.

MAX. SIZE: For general cargo and timber, 20 ft. draft in old port. For tankers, 33 ft. in the oil port.

See also "Tankers".

RADIO: Messages through coastal stations. also Kristinestad VHF Channel 24.

TUGS: 1 tug available 240 h.p.

BERTHING: No special requirements. Pilot gives orders for berthing.

Inner Wooden Quay. Length 75 m., depth alongside 15 ft.

Outer Stone Quay. Length 250 m., depth alongside 20 ft.

There are 3 mobile cranes of 10 tons capacity.

SPECIALISED CARGO HANDLING FACILITIES: Bulk cargoes can be discharged at quay, 4 portable cranes available. There is one ramp for roll-on/roll-off ships in oil harbour at Bjorno.

STEVEDORES: Advise ETA and gangs required as stipulated in charter-party. Also when laytime will commence to count. Only timber cargoes loaded.

Normal working hours 0700-1600 hrs. Saturdays and days preceding holidays 0700-1300 hrs.

DENSITY: 1004.

MEDICAL: Hospital facilities available.

TANKERS: Oil harbour at Pohjolan Voima Oy, power station at Bjorno. Depth 33 ft.=10 m. alongside the oil pier. One berth for tankers. Discharge capacity with two 10 in. pipe-lines 2,500 t.p.h. Fresh water supply to tankers available from shore installation rate 30 t.p.h.

FRESH WATER: Fresh water supply by shore installation. Any amount available.

FUEL: Fuel available by tank cars of about 20 tons capacity at short notice.

GANGWAY/DECK WATCHMEN: Not compulsory at Timber Pier. Compulsory in oil harbour, according to rules of Board of Navigation.

OPENING/CLOSING HATCHES: Normally carried out by crew, but on request may be handled by stevedores.

CUSTOMS ALLOWANCES: 200 cigarettes per 6 days, per man. Wine/Spirit allowance: One bottle per man.

CARGO GEAR: BOT Certificates. No additional requirements.

IDENTIFICATION CARDS: Not required.

CONSULS: Danish, tel. 11099.

REPAIRS: No shipyards, but welding pipe-line electric repairs possible.

AIRPORT: Nearest airports in Vaasa and Pori within 100 km., several flights per day.

TIME: Local time GMT plus 2 hours.

HOLIDAYS: See "Oulu".

POLICE/AMBULANCE/FIRE: Police Station of Kristinestad 12055 or 002; Ambulance 11626; Fire Brigade 005.

TELEPHONE: Public telephones on the pier.

GENERAL: Timber pier in Port of Kristinestad closed from the end of December to the middle of April owing to ice. Oil port will be kept open according to the general ice situation of Gulf of Bothnia.

SHORE LEAVE: Allowed.

AUTHORITY: Harbour Master.

MANTYLUOTO, Pori (including Reposaari and Tahkoluoto): 61.36 N. 21.29 E. **(See Plan Book)**

PORT LIMITS: The line between the lighthouses on Mantyluoto and Reposaari.

DOCUMENTS:
- Ship's Register.
- Crew List.
- Passenger List.
- Customs Documents.
- Manifests.
- Bills of Lading.

PILOTAGE: Pilot compulsory. Telegr. address: Luotsiasema, Mantyluoto (Pilotstation Mantyluoto), VHF Channel 16 or frequency 2182. 24-hr. service by pilot boats from Mantyluoto Pilot station, boats red-painted, international light or sound signals. Pilot to be taken 4 miles off Mantyluoto. In heavy fog, if required, Pilot station able to navigate vessels into harbour by radar, provided vessel has corresponding equipment.

ANCHORAGES: Reposaari Roads and outside the breakwater.

RESTRICTIONS: Depth in the channel 7.6 m.

MAX. SIZE: No other restrictions, but max. draft 25 ft. (7.6 m.).

Tahkoluoto Oil Harbour: Max. draft: 10.0 m.

Tahkoluoto Bulk Harbour: Max. draft: 10.0 m. Length of the quay 145 m. For self-discharging bulkships only.

Reposaari: Max. draft: 3.9 m.

RADIO: Inform Agents giving ETA via Helsinkiradio, Hankoradio, or Mariehamnradio, or VHF Channel 26, Pori.

TUGS: 5 tugs available from 200 h.p. up to 3,520 h.p. Tugs normally join the vessel near the quays. Tugs use ship's lines.

BERTHING:

		Depth of water (at normal water)	
Quay	*Quay Section*	*(m.)*	*(ft.)*
Kivilaituri	I	7.0—7.3	23—24
	II	6.0—6.5	20—21
	III	4.5—5.5	15—18
Betonilaiturin lansipaa	IV	7.0	23
Betonilaiturin itapaa	V	6.5	21
	VI	3.9	13
Vasikkaniemen etelalaituri	VII	3.9	13
	VIII	6.5	21
Vasikkaniemen paalaituri	IX	7.0	23
Vasikkaniemen pohjoislaituri	X	7.6	25
Kirrisannan laituri	XI	7.6	25
Reposaaren laituri	XII	3.9	13
Tahkoluodon laituri	XIII	9.5	31

CRANES:

		Cranes	
Quay	*Quay Section*	*Number*	*Capacity*
Kivilaituri	I		
	II	2	3 tons
	III		
Betonilaiturin lansipaa	IV	2 2	3 tons 3/5 tons
Betonilaiturin itapaa	V	—	—
	VI	—	—
Vasikkaniemen etelalaituri	VII VIII	2	5 tons
Vasikkaniemen paalaituri	IX	1	25 tons
Vasikkaniemen pohjoislaituri	X	4 1	6 tons 15/30 tons
Kirrisannan laituri	XI	1	200 tons
Reposaaren laituri	XII	—	—
Tahkoluodon laituri	XIII	—	—

CARGO HANDLING FACILITIES: Three Ro/Ro berths, 30–ton crane able to handle containers.

STEVEDORES: The vessels receive workers in the order in which they enter the harbour. ETA advices appreciated in order to facilitate arranging gangs.

MEDICAL: No advance notice for medical attention required. Hospital facilities available.

DENSITY: 1004.5.

FRESH WATER: Supply by shore installation.

FUEL: All grades available.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: This work normally carried out by crew.

CERTIFICATES: Load Line Certificate and during Winter season Ice Dues Certificate which issued by authorities for each season.

IDENTIFICATION CARDS. Not needed.

CONSULS: Vice-Consuls: Britain, tel. 939/43122; Denmark, tel. 939/43122; Netherlands, tel. 939/43222; Norway, tel. 939/43222; Sweden, tel. 939/11141.

REPAIRS: Most repairs possible.

AIRPORT: Distance from airport 22 kms. Served regularly by Finnair.
DEVELOPMENTS: Coal quay under construction at Tahkoluoto.
TIME: Local time 2 hours ahead of GMT. No seasonal alterations.
AUTHORITY: Porin Kaupungin Satamalaitos, Pori.

MARIEHAMN: 60.06 N. 19.56 E. (See Plan Book)

PORT LIMITS: The Southern boundary of the port is on a line between 60° 03.5′ N., 19° 56.1′ E. and 60° 04.2′ N., 19° 55′ E.
DOCUMENTS:
1 Crew List.
1 Passenger List.
3 Provision Lists.
2 Special Lists (in possession each crew member – cigarettes, tobacco, spirit, radios, etc.).
2 Bills of Lading.
Registered Tonnage Certificate.
PILOTAGE: Pilot arrives from station at Lotsberget in Westerhamn harbour, and meet entering vessels about 2 nautical miles southwest of Marhallan lighthouse. 3 hours notice of ETA is required. Pilot station and cutter are fitted with VHF-radio and keep watch on Channel 16, 24 hours a day. Working-Channel is 13. Pilot can also be ordered by cable via Mariehamn Radio.

Pilot can also be taken from Nyhamn pilot station 12 miles from the port. Nyhamn has VHF, Radio 2182 kc/s and Radar.
ANCHORAGES: Good anchorages North of Grano Island in 10 to 20 m. water.
MAX. SIZE: Ships of 130 m. length and 6 m. draft can enter the port.
RADIO: Mariehamn Radio, call/sign OHM on telegraphy and OFH for telephony. Connected to the public telegraph and telephone service.
VHF: Following stations keep watch on VHF Channel 16: Mariehamn Radio, Mariehamns Pilot, Mariehamns Hamn (Harbour Office), Sjobevakningen Mariehamn (The Coast Guard at Mariehamn).
TUGS: 1 tug of 320 h.p. available. The m/s *Gustaf Erikson* belonging to the Alands Lifeboat Society. Usually ships' lines are used.
BERTHING: Deep Water quay. Length 105 m., depth 20 ft. Total length of other quays 690 m. Average depth 18 ft.

Power Station Pier. Depth 16 ft. Oil Pier, depth 16 ft. 5 in., max. length of tanker, 80 m.
CRANES: 3 mobile cranes can be rented from Alands Kranservice. Maximum lift, one crane of 15 tons and two of 25 tons on the shortest radius.
SPECIALISED CARGO-HANDLING FACILITIES: 2 berths for roll-on roll-off traffic, used by car ferries.
STEVEDORES: Ordered by Agents. ETA in good time to obtain gangs.
DENSITY: 1005.
MEDICAL: All services available.
FRESH WATER: Most berths supplied by shore installations about 15 t.p.h., otherwise by truck.
FUEL: Only diesel oil, no heavy products.
GANGWAY/DECK WATCHMEN: Available but not necessary.
OPENING/CLOSING HATCHES: Normally done by crew.
CERTIFICATES: International Tonnage Certificate or National Tonnage Certificate.
CUSTOMS ALLOWANCES: 200 cigarettes and limited amount spirits for each crew member.
CREW IDENTIFICATION CARDS: Not needed for Scandinavian citizens. Passports for all others.
CONSULS: Denmark 11 454, Holland 12 070, Iceland 21 849, Norway 12 050, Sweden 11 624, U.S.S.R. 11 524, West Germany 11 410.
REPAIRS: Most repairs possible.
DRY DOCKS: Slipway for small vessels, max. about 3-400 d.w.t.
SURVEYORS: No permanent surveyors at Mariehamn.
REPATRIATION: Mariehamn is a good place for repatriation, with many connections to Sweden and to the Finnish mainland every day, with car-ferries and aeroplanes. About 1 million tourists are visiting Aland Island every year.
AIRPORT: About 5 km., daily traffic to Stockholm and Abo/Turku.
TIME: GMT plus 2 hours.
HOLIDAYS: See "Oulu".
POLICE/AMBULANCE/FIRE: Police 002 or 11 126; Ambulance 005, Fire 005 or 11 000.
TELEPHONES: Available at berths for passenger ships. Connection will cost 120 Fmk. year 1976.
AUTHORITY: Harbour Master, Port of Mariehamn.

NAANTALI: 60.28 N. 22.01 E. (See Plan Book)

DOCUMENTS:
Health Certificate.
Crew List.
Passenger List.
Dangerous Cargo List.
Ship's Register.
PILOTAGE: Pilot compulsory at Uto Pilot station. When approaching Uto communicate with VHF Channel 16. ETA, name of vessel, destination, draft. Change of Pilot takes place in Lohm. Harbour pilots available at the port. Distance Uto-Lohm, 25 miles. Lohm-Naantali, 28 miles.
ANCHORAGE: Good safe anchorage in harbour area. Max. draft for vessels 10 m.
MAX. SIZE: Maximum permissible length for tankers 210 m., Mainguay – maximum length for any vessel 150 m.
HEALTH: International Quarantine flag required in case of suspected disease or fever including preliminary report by VHF, otherwise ask Agent.
RADIO: Hanko Radio; Mariehamn Radio; VHF Turku 26; VHF Mariehamn 27; VHF Korppoo 23.
VHF: Communication on Channel 16, own working Channel 11.
RADAR: When Radar Service needed, ask Agent.
TUGS: Harbour icebreaker tug *Naantali* 1,200 h.p., equipped with bow steering propeller. Use ship's lines. Additional tugs on application from Turku.
BERTHING: No special requirements. Harbour/Drafts: No tide. Main quay, length 275 m., draft 10 m. Timber quay, length 80 m., draft 6.7 m. 3 car-ferry piers, length 80 m./80 m./95 m., drafts 9 m./6.4 m./6.6 m. Lubricating Oil pier, length 33 m., draft 6.5 m. Sugar quay, length 35 m., draft 4.5 m.
CRANES: 2 cranes owned by electric powerplant of 6 tons each and heavy-lift of 200 tons.
BULK CARGO FACILITIES: Grain handled by two pneumatic elevators and belt conveyor, Loading/Discharging 200 t.p.h., maximum reach for outlet/inlet 13 m. and 16 m., maximum height above quay level 8 m. and 9 m. when loading, discharging limits are 10 m. and 11 m., 135 m. of main quay intended to be for handling of grain, 120 m. for coal,, which is handled by 2 cranes of 6 tons each and belt conveyor, discharging rate about 300 t.p.h.
SPECIALISED CARGO-HANDLING FACILITIES; Roll-on/roll-off traffic possibility.
STEVEDORES: Available, ordered by Agent.
MEDICAL: Advise by radio prior arrival if medical attendance required aboard.
TANKERS: Oil Harbour, Neste Oy. Discharge lines ashore 10 in., 12 in., 18 in., Diameter of cargo hoses and respective draft of tanker berths:
Berth No. 1, 6 in., 5.7 m.
Berth No. 2, 10 in., 10.0 m.
Berth No. 3, 8 in., 10 in., 12 in., 11.5 m.
DENSITY: 1007.
FRESH WATER: Supplied by shore installations at most berths.
FUEL: All grades available.
FIRE PRECAUTIONS: Usual precautions.
GANGWAY/DECK WATCHMEN: Available. Tankers compulsory.
OPENING/CLOSING HATCHES: Normally carried out by crew.
CUSTOMS ALLOWANCE: 200 cigarettes/200 gr. tobacco and 1 bottle spirits/wine,
IDENTIFICATION CARDS: Not required.
CONSULS: In Turku 17 km. away.

Belgium	phone	381511
Honduras	,,	786161
Iceland	,,	336444
Great Britain	,,	382322
Italy	,,	20510
Austria	,,	375970
Greece	,,	334704
U.S.S.R.	,,	336441
Norway	,,	27922
France	,,	382111
Sweden	,,	333344

REPAIRS: Small repairs can be carried out, ask Agent.
DRY DOCKS: None, See Turku. Naantali, Oy Navire Ab Navire yard, new buildings, main dimension of building dock 220 m. × 70 m., outfitting dock 180 m. × 125 m., sill depth 8.2 m.
SURVEYORS: Ask Agent.
CARGO GEAR: Heavy-lift crane of 200 tons, max. reach 9.1 m., max. lifting height 18 m. from quay level.
REPATRIATION: Good connections everywhere.
AIRPORTS: 20 km. distant. Regular service.
TIME: GMT plus 2 hours.
HOLIDAYS: New Year's Day, Epiphany, Good Friday, Easter Monday, Labour Day, Whit Monday, Midsummer, All Saints' Day, Independence Day, (6th December), Christmas.
TELEPHONES: A telephone connection available at Main quay.
SERVICES: Facilities for discharge of tank-washings, 10,000 cu. m. (Oil Harbour). Compass adjusting, ask Agent.
SHORE LEAVE: No restrictions for crew members.
IDENTIFICATION CARDS: Not required.
REGULATIONS: Oil pollution strictly prohibited, as well as all kind of dirt.
DELAYS: Usually no delays.
POLICE/AMBULANCE/FIRE: Police 751 133; Ambulance 751 123, Fire Brigade 005.
AUTHORITY: Harbour Manager, Naantalin Satamalaitos.

OULU: 65.01 N. 25.28 E. (See Plan Book)

PORT LIMITS: The seaward boundary of the port is drawn West of Oulu Roads. The arriving vessel passing the Hermanni Island is inside the boundaries and if necessary to anchor on the roads, is considered to be an "arrived vessel".

Port consists of four separate parts *(a)* Toppila – Main Harbour. *(b)* South Harbour – Nuottasaari Quay – Ore Harbour. *(c)* Oil Harbour (Vihreasaari). *(d)* Oritkari Quay, inc. roll-on/roll-off quay.

DOCUMENTS:
2 Crew Lists.
2 Passenger Lists.
Customs Documents.
2 Crew Bond Declarations.
2 Ships bond-store Lists.
Derating Certificate.
4 Manifests.
2 Bills of Lading.
Ship's Register, Certificate of tonnage.

PILOTAGE: Vessel requiring Pilot applies from Marjaniemi. Pilot station, Lat. 65° 02' 4" N., Long. 24° 34' E., near West point of Hailuoto Island. Pilots require 12 hours notice of ETA to Peltinmatala lightbuoy (Pilots) or to alternative position 3 miles North of Kemi lightbuoy. Pilot boat red coloured displaying usual international pilot signs. Pilot station equipped with HF (2182) and VHF, Channel 16, radar and RC. Morse signalling by light. No specific requirements on part of Pilots boarding, only safe pilot ladder according to rules. Anchorage near lightbuoy Peltinmatala, when awaiting for Pilot in fine weather; in bad weather advisable to ride against weather and wind. Pilot for Oulu can also be obtained near the "Kemi I" light-tower. Vessels with a draft more than 8.0 m. must use this fairway and apply for Pilot either from Marjaniemi or Kemi Pilot station, wireless 2182 or VHF 16.

ANCHORAGE: Safe anchorage on Oulu roads. There are no safe anchorages West of Hailuoto Island.

RESTRICTIONS: Day and night service, no tides. Winter season, contact ice-breaker 24 hours in advance on HF (2182), or VHF Channel 16.

MAX. SIZE: *Marjaniemi Fairway:* 8.0 m. *Kemi Fairway:* 10.0 m.

Toppila Harbour: North Quay depth 6.1 m., Hietasaari Quay, depth 6.1 m.

South Harbour: Oritkari Deep Water Quay, depth 9 m. Nuottasaari Quay depth 6.4 m.

Oil Harbour: Depth 10 m.

Also see "Berthing".

HEALTH: No special rules existing in obtaining pratique. If disease or fever is suspected on board report to ship's Agent; will contact the Health Authority for necessary arrangements.

RADIO: Vaasa Radio (North Quarken). Close to Hailuoto Island call "Oulu Radio" VHF Channel 27 or Channel 24.

RADAR/VHF: At Marjaniemi Pilot station, radar range 30 miles. Contact with HF (2182) or VHF (Channel 16). All ice-breakers keep watch on frequency 2182 and VHF (16).

TUGS: Tug optional, but for vessels over 140 m. long use is advisable. Tug will meet on Oulu Roads according to agreement; customary to use ship's lines.

BERTHING: *Toppila Harbour:* Depth 5.0–6.1 m. North Quay length 1,000 m. South Quay length 2,200 m. Pulp factory Quay length 200 m.

South Harbour: Length 320 m.

Oritkari Quay: Length 270 m.

CRANES:

	No.	*Capacity (tons)*	*Reach of arm (m.)*	*Type*
South Harbour	1	5	12	Movable
Toppila	1	6	22	,,
	1	3	12	,,
	1	5	12	,,
	1	8	26	,,

CARGO HANDLING FACILITIES: *(a)* Toppila Harbour is equipped with 4 cranes to discharge bulk cargoes (coal, china-clay, potash, etc.) and with 2 pneumatic pipes to discharge grain.

(b) Roll-on/roll-off berth is adjacent to the Oritkari Quay in the South Harbour.

(c) Oritkari Quay is built to mechanically handle paper cargoes.

BRIDGES: No bridges. Electric cable across Toppila fairway, 50 m. above water.

STEVEDORES: 24 hours' notice of ETA to be given to Agent who arranges necessary gangs.

MEDICAL: Medical attention arranged through Agent, 2–4 hours notice required. Good hospital facilities available.

TANKERS: One principal tanker berth in Vihreasaari Oil Harbour, depth 10.0 m. Discharge lines of 12, 14 and 18 in. Pressure 10 Kp/Cm².

DENSITY: Fresh water.

FRESH WATER: Available at main berths and Oil Harbour from pipe-line, cost about 5.00 mk/ton. Elsewhere water is delivered by boat, cost about 8.00 mk/ton.

FUEL: Small quantities of all grades available, deliveried by lorries.

DEVELOPMENTS: The second stage of the Oritkari Deep Water Quay will be completed in 1980. The length of the new quay is 250 m. and allowed draft 10 m. The quay is specially designed for general cargo and there will be ro/ro and container facilities.

GANGWAY/DECK WATCHMEN: Watchmen recommended.

OPENING/CLOSING HATCHES: Normally carried out by crew. Stevedores will do it by order of Master and will charge as shipwork.

CERTIFICATES:
Nationality Certificate.
Measuring Certificate.
Load-line Certificate.
Classification Certificate.
Safety Equipment Certificate.
Radio Safety Certificate.
Derating Certificate.

CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes or 200 gr. pipe tobacco or equal amount of cigars allowed to each member of crew. Wine and/or Spirit: One bottle wine or spirit allowed for each member of the crew.

CARGO GEAR: Tested cargo gear to international safety regulations. Test certificates to be on board vessel.

IDENTIFICATION CARDS: Not needed.

CONSULS: Sweden, Norway, Denmark, Great Britain and Netherlands.

REPAIRS: Minor deck and engine repairs carried out. Docking only for small tug boats.

SERVICES: Compass adjusters and ship's cleaning.

DRY DOCKS: One small slipway. Max. vessels of 25 m. length and 8 ft. draft.

REPATRIATION: Good facilities for effecting crew changes and to arrange necessary repatriation.

AIRPORT: Oulu Airport 15 km. from harbour served by regular airlines. Six daily flights to Helsinki and six flights from Helsinki to Oulu with continuous connection to Kemi and Rovaniemi.

TIME: Local time GMT plus 2 hours.

HOLIDAYS: General holidays in Finland: New Year's Day (January 1st); Good Friday; Easter Monday; Labour Day (May 1st); Independence Day (December 6th); Christmas Day (December 25th); Boxing Day (December 26th).

POLICE/AMBULANCE/FIRE: Fire 005, Reserve 006; Ambulance 006, Reserve 005; Police 002, Reserve 003.

TELEPHONES: A telephone connection available at Vihreasaari oil terminal.

AUTHORITY: Harbour Office of Oulu.

PARGAS: 60.18 N. 22.18 E. (See Plan Book)

DOCUMENTS:
3 Crew Lists.
1-2 Custom Provision Lists.
1-2 Custom Special Lists.
2 Passenger Lists.
2 Copies each Bill of Loading.
Tonnage Certificate and in special instances other regular documents.

PILOTAGE: On arrival at Pargas, from Gulf of Finland, from Baltic via Uto, from Gulf of Bothnia via Enskar, information of ETA to be given in good time to respective Pilot stations. VHF Channel 16 for calling, 13 for further communication. Charge for piloting in accordance with official Finnish tariff. Harbour Pilot available, but not compulsory, and can be ordered through Sea Pilot.

ANCHORAGES: Well sheltered and safe anchorage, immediately outside harbour area.

MAX. SIZE: Maximum depth both in channel and along quay 6.70 m. As regards length of quay and possibilities for a quick dispatch, it is desirable (though not an absolute stipulation) that discharging vessel be a bulk carrier with the engines aft.

HEALTH: Free pratique automatic for all vessels, but temporary exceptions in and according to regulations issued by W.H.O. and Authorities may occur.

RADIO: Radio-telephone contact with Agent and consignee/shipper is obtained via Mariehamn, radio-call 2196 kHz, reply 1852 OHF; or via Hango, radio-call 1967 kHz, reply 2649 OFO. Contact with VHF is ordered via Abo, Channel 26.

TUGS: A small motor tug of 200 h.p. available.

BERTHING: Directions to berth via nearest Pilot station, Pargasport. Quay level above water 1-2 m., dependent on berth.

Length of quays, 800 m. 2 electric coal-discharging bucket cranes and one electric conveyor belt.

STEVEDORES: Arrangements will be made by Agent, who must be advised of ETA previous day to enable arrange men, trucks, etc.

MEDICAL: Medical officer available locally. Necessary examination and taking of tests usually done in Abo. Regular appointment with local physician can be arranged by telephone with Agent or doctor.

DENSITY: Brackish water 1002.

FRESH WATER: Delivery from installation on quay.

FUEL: No local supply. In case of need delivery by truck from Abo.

GANGWAY/DECK WATCHMEN: Available but not necessary.

OPENING/CLOSING HATCHES: Must always be performed by crew.

CERTIFICATES: Normally tonnage certificate only but in special instances other regular ship's documents may also be needed.

CUSTOMS ALLOWANCES: Tobacco, Wine and/or Spirits. In accordance with the decision of Customs authorities.

IDENTIFICATION CARDS: Not required.

CONSULS: See "Turku".

REPAIRS: Facilities for arranging small repairs on deck and engine in Pargas, but usually carried out by reliable companies in Abo.

DRY DOCKS: No local docking facilities. See "Turku".

AIRPORT: Nearest airport in Abo. Distance about 25 km.

TIME: Local time/GMT plus 2 hours.

HOLIDAYS: New Year's Day (1st January), Epiphany (6th January), Good Friday, Easter Monday, Labour Day (1st May), Ascension Day, Whit Monday, Midsummer (2 days), All Saints' Day, Independence Day (6th December), Christmas (25th December). Work in harbour carried out during these days only under very pressing circumstances.

POLICE/AMBULANCE/FIRE: Police 744048; Ambulance 744064; Fire 005; Life-saving Corps 356595.

TELEPHONE: No facilities for placing telephone on board. Telephone available on quayside.

SHORE LEAVE: No restrictions for crew members.
DELAYS: Vessels dispatched in order of arrival. Usually no delays occur as work has generally been carried out within the time limit stipulated in C/P. Port activity aimed at good dispatch of vessels, and consequently work in 2 shifts has been arranged.
AUTHORITY: Port owned by Paraisten Kalkki Oy.

PATENIEMI: 65.06 N. 25.23 E. (See Plan Book)

OPERATORS: Oulu Osakeyhtio Sawmill. Port used for export of timber only, about 160,000 cu.m. per year. 12 km. North of Oulu.
DOCUMENTS:

2 Crew Lists.
2 Passenger Lists.
Customs Documents.
2 Crew Bond Declarations.
2 Ship's Bond Store Lists.
Derating Certificate.
4 Manifests.
2 Bills of Lading.
Ship's Register, Certificate of Tonnage.

PILOTAGE: Pilot station at Marjaniemi. Marjaniemi – Pateniemi 40 n. miles 23 ft. depth.
ANCHORAGES: Safe anchorage on Oulu roads. There are no safe anchorages West of the Hailuoto Island.
RESTRICTIONS: Day and night service, no tides. Winter season, contact ice-breaker 24 hours in advance on HF (2182), or VHF Channel 16.
MAX. SIZE: Only dry-cargo vessels use this terminal. Max. draft 7 m. For length no restriction. Ship of 15,400 d.w.t. has entered.
HEALTH: No special rules existing in obtaining pratique. If fever or disease suspected on board to be reported to ship's Agent, he will contact Health Authority for necessary arrangements.
RADIO: "Vaasa Radio" (North Quarken). Approaching Oulu contact Agent through "Vaasa Radio". Close to Hailuoto Island call "Oulu Radio" VHF Station, Channel 27.
RADAR/VHF: At Marjaniemi Pilot station, radar range 30 miles. Contact with HF (2182) or VHF (Channel 16). All ice-breakers keep watch on frequency 2182 and VHF (16).
TUGS: Tug optional, but for vessels over 140 m. length the use is advisable. Tug will meet on Oulu Roads, according to agreement. Customary to use ship's lines.
BERTHING: Pier extends for 700 m. enabling 10 vessels of medium size to load simultaneously at quay. Depth at quays is from 20 to 23 ft.
STEVEDORES: 24 hours notice of ETA to be given to Agent, who arranges necessary gangs.
MEDICAL: Medical attention arranged through Agent. 2–4 hours notice required. Good hospital facilities available.
DENSITY: Fresh water.
FRESH WATER: Available at main berths delivered by boat and from pipe-line.
FUEL: Small quantities of all grades available, delivered by lorries.
FIRE PRECAUTIONS: Smoking prohibited in timberyards.
GANGWAY/DECK WATCHMEN: Recommended.
OPENING/CLOSING HATCHES: Normally carried out by crew. Stevedores will do it by order of Master and will charge as ship work.
CERTIFICATES:

Nationality Certificate.
Measuring Certificate.
Load Line Certificate.
Classification Certificate.
Safety Equipment Certificate.
Radio Safety Equipment.
Derating Certificate.

CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes or 200 gr. pipe tobacco or equal amount of cigars allowed to each member of crew. Wine and/or Spirit: 1 bottle wine or spirits is allowed for each member of the crew.
CARGO GEAR: Tested cargo gear to international safety regulations. Test certificates to be on board.
IDENTIFICATION CARDS: Not needed.
CONSULS: British (Consul), Danish, French, Dutch, Norwegian and Swedish Vice-Consuls at Oulu.
SERVICES: Compass adjusters and ship's cleaning (no tank-washing).
REPATRIATION: Good facilities for effecting crew changes and to arrange necessary repatriations.
AIRPORT: Oulu Airport 15 kms. from harbour served by regular airlines. 6 daily flights to Helsinki and 6 flights from Helsinki to Oulu with continuous connection to Kemi and Rovaniemi.
TIME: Local time GMT plus 2 hours.
HOLIDAYS: General Holidays in Finland: New Year's Day (January 1st); Epiphany (January 6th); Good Friday; Easter Monday; Labour Day (May 1st); Ascension Day (May 23rd); Whit Monday; Midsummer Day (June 22nd); All Saints' Day (November 2nd); Independence Day (December 6th); Christmas Day (December 25th); Boxing Day (December 26th).
POLICE/AMBULANCE/FIRE: Fire 005, Reserve 006; Ambulance 006, Reserve 005; Police tel. 002, Reserve 003.
REGULATIONS: Oil pollution strictly prohibited. Considerable timber lying in water and damages are ship's responsibility.
SHORE LEAVE: Crew members allowed ashore without restrictions.
AUTHORITY: Harbour Office of Oulu.

PORKKALA (Kantvik): 60.05 N. 24.23 E. (See Plan Book)

Documents and all general information, refer to "Helsinki".
PILOTAGE: A Pilot can be obtained from the Pilot Station of Porkkala, Tel. 90–2984 112 or VHF Channels 13 and 16. Distance to port about 14 miles. Pilotage in the harbour area may be carried out only by State-appointed Pilots. Pilotage in the harbour is not obligatory.
MAX. SIZE: Maximum draft 30 ft. 2 in. (9.2 m.).
APPROACHES: There are four official ship routes leading to the port of Porkkala (Kantvik) of Suomen Sokeri Osakeyhtio. The deepest one is 9.2 m. (30 ft.) and the shallowest one is 5.5 m. (18 ft.). The port does not have an ice-breaker of its own and the fairway is kept open by means of the State's ice-breakers.
CLEARANCE: The customs formalities of the port are attended to by the Custom House of Helsinki.
TUGS: A small motor tug of 200 h.p. available. Bigger tugboat, if needed can be ordered from Helsinki or from Inkoo.
BERTHING: The port of Porkkala (Kantvik) is owned by Suomen Sokeri and it is located at Kantvik. Directly in the vicinity of the port there is the factory of Suomen Sokeri Osakeyhtio (sugar mill). The port basin has 3 quays:

The outer quay is 110 m. long, draft 9.2 m. (30 ft. 2 in.).
The inner quay is 50 m. long, draft 5.3 m. (17 ft. 4 in.).
The fairway of the port basin is 120 m. wide, narrowing up at its end to 76.5 m. South quay (at the South bank of Kantvik Bay) is 60 m. long, draft 6.7 m. (21 ft. 11 in.).

DENSITY: 1004.
CRANES: Two cranes, capacity 8 tons. One crane is on the outer quay and one on the South quay. Also one 3-ton mobile crane.
FRESH WATER: Available at quays.
CONSULS: Nearest in Helsinki.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Normally by the crew.
AIRPORT: Nearest Helsinki, distance 45 kms.
TIME: Local time is GMT plus 2 hrs.
HOLIDAYS: On Saturdays, Sundays and General Holidays in Finland no cargo work is done.
POLICE/AMBULANCE/FIRE: Contact the Gatehouse of Factory.
TELEPHONES: Can be arranged on board. Telephone calls can be made from the Harbour Office during day-time.
SHORE LEAVE: No restrictions.
IDENTIFICATION CARDS: Not needed.
SHIPMASTER'S REPORT: The sugar discharging berth for Porkkala is at Kantvik, situated in Lat. 60° 05′ N., Long. 24° 23.25′ E., about 21 miles West of Helsinki.

The Pilot for the port is embarked at the position indicated on British Admiralty Chart No. 2331, 115° 3.5 miles from Porkkala lighthouse. From there to the berth is 12 miles and the passage presents no difficulties. It is well lit, and there is ample water. The least depth recorded was 31 ft. and that was alongside the berth. There is a powerful tug for assisting in berthing and unberthing.

The discharging berth, alongside which vessels lie port side to, is modern and well fendered. It is sheltered from most directions. Unfortunately, the berth is short for a 500 ft. vessel, and additional moorings have to be placed from amidships.

There is only 1 crane on the berth and to work either of the end hatches a shift would be necessary. Work was continuous while the vessel discharged her part cargo at Kantvik, and an out-turn rate of 100 t.p.h. was achieved.

Fresh water is readily available from the Jetty, and presumably, fuel could be obtained by lighter from Helsinki. Telephones in the dock offices are available for official use.

There is a bus service to and from Helsinki, the journey taking about 40 minutes.
AUTHORITY: Suomen Sokeri Oy, Harbour Master.

PORVOO (Skoldvik): 60.18 N. 25.33 E. (See Plan Book)

The harbour is a private oil harbour owned and managed by Neste Oy.

The harbour is located at Skoldvik in the municipal area of Porvoo about 45 km. (28 miles) East of Helsinki, Lat. 60° 18′ N., Long. 25° 33′ E. The area is shown on Finnish marine charts Nos. 17 and 902.

The distance from the Kallbadagrund lighthouse to the harbour is 20.5 nautical miles (38 km.). The minimum width of the harbour channel is 270 m. (885 ft.) and the approved depth is 15.3 m. (50 ft.).

The water level varies between +1.5 m. and −0.75 m. (+5 ft and −2.5 ft.) depending on the wind. There are no tides in the area.

The Winter period is from January to early May. During this time the channel from the open sea to the harbour is kept open by icebreakers owned by the State. The Finnish Board of Navigation determines the requirements for vessels allowed to enter various ports during this period.

Officially, the extra charges for the Winter period are collected from 1st December to 30th April.

DOCUMENTS: The following documents shall be handed over after berthing:

4 Crew Lists
2 Lists of Visitors
3 Passenger Lists
1 Provision List
1 Special List
Ship's Register, Certificate of Tonnage
the usual Cargo Documents

PILOTAGE: Pilotage is compulsory. The Pilots are Seapilots employed by the State. They also perform the pilotage inside the port area.

The Pilot station is at the outer end of Emsalo island. Vessels entering from the sea are boarded by the Pilot at Kallbadagrund, Lat. 59° 59.1′ N., Long. 25° 36.1′ E.

The Pilot shall be called by using the international code, VHF Channels are 13 and 16.

The Seapilots serve as Docking Masters berthing the vessel with or without the help of tugs.

RESTRICTIONS: Vessels can enter and leave the harbour 24 hours a day. However, vessels whose keel clearance is minimal are not allowed to berth in darkness or under unfavourable wind conditions.

In bad Winter, port may be closed by ice between January and April although normally kept open by ice-breakers.

MAX. SIZE: Up to about 150,000 d.w.t. Max. draft 45 ft. (13.5 m.).

HEALTH: Bill of Health not required. In case suspected disease or fever on board, radio Agent full details before arrival to advise Port Health Officer in advance.

RADIO: Notice of arrival shall be given 12 hours before the calculated time of arrival by the ship's Agent (Helsinki radio). Two hours before arrival at the boarding site for the Pilot, the same notice shall be sent, including

1) The name and the nationality of the vessel
2) Net registered tonnage
3) The time and date of the notice
4) The draft of the vessel
5) Time of arrival at the boarding site for the Pilot.

VHF: The harbour office is open 24 hours a day. It is provided with the VHF station "Neste". The following channels are available: 9, 13, 16 and 21. Telex connection is 17-46 neste sf.

TUGS: The harbour icebreaker "Into" and tug "Esta", owned by Neste are available to handle vessels. Respective capacities are:

"Into"	2,150 kW	(2,920 hp)
"Esta"	1,000 kW	(1,330 hp)

Vessels over 80,000 d.w.t. need additional tugs, which the ship's Agent shall order from Helsinki.

The ship's own lines shall be used for towing.

BERTHING: There are five berths available for discharging crude oil and loading of oil products. An additional berth is available for handling of petrochemical products.

Loading and discharging is possible around the clock. During the icefree period all berths are surrounded by oil booms.

Berth 1:	Face direction 023° 42′ Water depth 12.6 m. (41 ft.) Maximum vessel size about 50,000 d.w.t.
Berth 2:	Face direction 128° 42′ Water depth 17.6 m. (57 ft.) Maximum vessel length 325 m. (1,066 ft.) N.B. Vessel to be moored starboard side alongside Shore gangways Maximum reach of loading arms +21.5 m. (+70 ft.) from sea level
Berth 3:	Face direction 128° 42′ Water depth 17.6 m. (57 ft.) Maximum vessel length 280 m. (918 ft.) N.B. Vessel to be moored starboard side alongside Shore gangways Maximum reach of loading arms +19.5 m. (+64 ft.) from sea level
Berth 4:	Face direction 017° 56′ Water depth 15.9 m. (52 ft.) Maximum vessel size about 150,000 d.w.t.
Berth 5:	Face direction 002° 58′ Water depth 8 m. (26 ft.) Maximum vessel size about 8,000 d.w.t.
Berth 8:	Water depth 14 m. (46 ft.) Maximum vessel size about 40,000 d.w.t.

The water depths correspond to the normal water level.

All loading arm flanges are ANSI 150 lb. RF. For tugs and goods there are separate berths in the harbour.

DISCHARGING/LOADING: The usual methods are applied in discharging and loading. While discharging and loading the safety rules for Neste tank vessels and oil harbours shall be followed.

(A) Discharging capacities for crude oil (cu. m./h.)

Berth				
1	2	3	4	5
5,000	12,000	6,000	6,000	1,000

Crude oil can be discharged simultaneously at a maximum of three berths. However, at berths 2 and 3 only one ship at a time can be discharged because of a common pipe-line.

(B) Loading capacities (cu. m./h.)

Product	Berth				
	1	2	3	4	5
Heavy fuel oil	3,500	5,000	5,000	4,000	1,000
Gasoline	2,000			2,000	1,000
Diesel oil	2,000		2,500	2,000	1,000
Straight run naptha				1,500	
Jet fuel	500				
LNG	240				240

LNG is butane or propane. As there is one common pipe-line for LNG loading, only one ship at a time can be loaded.

Berth 8 is so far used for benzene loading only, capacity 550 cu. m./h.

During cargo handling sufficient crew shall be on board.

BALLAST: There are facilities for discharging ballast at oil berths. However, discharging can be effected simultaneously only from two berths.

The capacity of the ballast handling system of the refinery is 30,000 cu.m. and the maximum discharging rate at each berth is 1,000 cu.m./h. Ballasts over 5,000 cu.m. must be reported 48 hours prior to arrival.

The harbour office collects a charge to cover treatment costs for receiving ballast.

No ballast can be discharged at berth 8. However, flushing water for the tanks can be discharged provided that the pollutants can be handled in the Neste waste water treatment system. In that case the capacity is 100 cu. m./h.

MEDICAL: In emergency a doctor can be called on board. To call ambulance, dial 147700/2222. The nearest hospitals are in Porvoo and in Helsinki. Ship's Agent helps in other medical problems, such as providing medicines.

DENSITY: 1006.

FRESH WATER: Drinking water can be supplied from:

Berths 1, 4 and 5	25 cu. m./h.
Berths 2 and 3	50 cu. m./h.
Berth 8	20 cu. m./h.

FUEL: Bunkering facilities are installed at oil berths. Two grades are available, marine fuel oil and marine diesel oil.

The bunkering capacities:

Marine fuel oil	600 cu. m./h.
Marine diesel oil	up to 1,000 cu. m./h.

The diesel oil can be delivered through product lines. Bunkers must be ordered with 72 hours' notice addressed to Neste Marine Product Sales, telex Hki 12641.

GANGWAY/DECK WATCHMAN: Not required.

CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle wine or spirits for each man.

REPAIRS: Only minor repairs can be effected following the safety rules and with the permission of the harbour office.

REPATRIATION: Disembarking is possible. A foreigner needs a passport. Distance to Porvoo is 20 km. (12.5 miles) and to Helsinki 45 km. (28 miles).

AIRPORT: There are daily flights from Helsinki – Vantaa airport with good connections all over the world. Distance to the airport is about 50 km. (30 miles).

TIME: GMT plus 2 hours. No alteration during the year.

TELEPHONE NUMBERS: After berthing a telephone connected to the local automatic exchange will be placed on board all vessels, the respective dial numbers being:

Berth 1	23333
Berth 2	23334
Berth 3	23335
Berth 4	23336
Berth 5	23337
Important numbers:	
Harbour office	23339
	or 147700/2380 and 2381
Customs	23293
"Into"	23338
"Esta"	23350
Fire alarm/ ambulance	147700/2222

Bus connections, taxi:

Bus connection daily to Porvoo from 0700 to 2300 hrs.

Taxi 24 hours	tel. Nos.
Neste Oy taxi station	23245
Pekema Oy taxi station	23390
K-O Johansson	22252

GENERAL: *Inspections:*

To avoid oil accidents, an inspection based on the checking list is carried out before loading/discharging to find out the preparedness of the vessel to act in an emergency.

Vessels loading/discharging oil products are surrounded by oil booms.

Inspections are carried out and loading/discharging is supervised by the loading master, whose instructions must be followed. If he is not on board, he can be contacted by telephone, No. 23339 or 147700/2381.

REGULATIONS: In addition to the existing Finnish laws, statutes and other regulations the Port Regulations of Neste Oil Harbours must be followed.

Some excerpts:

Entering the Harbour: Vessels carrying explosives or flammable liquids or gases shall observe, what has been separately laid down concerning such cargo. The vessel shall show the prescribed caution sign in the harbour area.

Traffic in the Port Area: In the port area the speed of the vessel shall be according to the circumstances, so that no harm or danger shall be caused to anyone. Oil booms, underwater jobsites etc. shall be passed with special care. The maximum speed allowed in the port area is 6 (six) knots, unless otherwise stated by the harbour office.

Berthing of the Vessel: Without urgent need, anchorage is prohibited in the marked fairway, in the vicinity of the submarine pipe-lines or cables or in any place where the vessel may disturb the traffic.

The vessel shall be moored alongside the berth appointed by the harbour authorities and it shall not be removed without permission.

While berthing or unberthing or whilst moored at the berths the relevant safety precautions shall be taken to avoid any damage to the berths.

All ships' scuppers must be plugged or closed by mechanical means so that no water, steam or dirt comes into contact with the berth or its immediate vicinity.

A sufficient crew shall be maintained on board to ensure that the ship can be removed, if necessary.

Prevention of Shallowing and Contamination of the harbour:

In the port area it is prohibited to discharge oil or oil-emulsified water. In the Baltic Sea the existing restrictions must be observed.

The jettisoning of garbage and refuse is prohibited in the port area. The decoking of the chimneys and boilers of the ship while at the berth is prohibited.

AUTHORITY: Harbour Master.

RAAHE (LAPALUOTO): 64.41 N. 24.29 E.

(See Plan Book)

PORT LIMITS: Vessel is considered to be an "arrived vessel" subject to Charter Party Terms, when passing breakwaters if not ordered to anchor near Raahe Lighthouse by Port Authority.

DOCUMENTS:
Crew Lists.
Passenger List.
Ship's Register.
Custom List.
Provisions List.

PILOTAGE: Masters to contact Pilot station and pilot boat, VHF Channel 16. Pilots board and disembark by pilot cutter (red) near Raahe Lighthouse (Lat. 64° 39′ N., Long. 24° 13′ 5″ E.). Day and night service.

ANCHORAGE: Vessels can anchor outside Raahe Lighthouse, depth 15-20 m. No anchorages inside breakwaters.

RESTRICTIONS: No restrictions night entry.

MAX. SIZE: Lapaluoto Harbour, draft inside 18 ft., outside 22 ft. Length up to 140 m.

Rautaruukki Oy Harbour; draft 24 ft. 8 in., length up to 360 m.

Ore Harbour, draft 22 ft.

RADIO: Helsinki Radio, 2182 kHz, call sign OHG, Mariehamn Radio, 2182 kHz, call sign OFH; Vaasa Radio 2182 kHz, call sign OFW.

RADAR/VHF: No port radar services. Pilot station. Radio, 2182 kHz, VHF Channel 16. Rautaruukki Oy Harbour Office, VHF, Channel 16 and tugboat "Rautalouto" VHF, Channel 16.

TUGS: Tug *Rautaluoto* 600 h.p.

STEVEDORES: Rautaruukki Oy, in Steelworks Harbour; other private firms.

SPECIALISED CARGO HANDLING FACILITIES: Lapaluoto Harbour, no shore cranes, Ore Harbour (Helmi), only conveyor. Rautaruukki Oy Harbour, import quay equipped with two 12.5-ton shore cranes and conveyor; export quay equipped with two 12.5-ton shore cranes, straddle carriers and equipment for handling steel and general goods. Max. lifting capacity 24 tons.

LIFEBOAT STATION: Lifeboat cutter "Niilo Saarinen", 360 h.p., 10 kts. Radio 2182 kHz, VHF Channel 16, Radar, fire and drainage pump 4,000 lit/min. Alarm through National Lifeboat Service, Pilot or Police Stations.

DENSITY: Average density 1002.

FRESH WATER: Available from Rautaruukki harbour.

FUEL: Small quantities available, one day's notice required.

FIRE PRECAUTIONS: No special precautions in Lapaluoto Harbour.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: Normally by the crew.

CUSTOMS ALLOWANCES: About 200 cigarettes and limited amount spirits per man.

IDENTIFICATION CARDS: Not required.

CONSULS:
Denmark 31146 – 37269
Norway 31146 – 37269
Sweden 37300 – 37007

REPAIRS: Raahe Oy, Mechanical Workshop. Slip for small ships.

DRY DOCKS: None.

AIRPORT: Oulunsalo Airport, about 60 kms. from Raahe.

TIME: Local time is GMT plus 2 hours.

HOLIDAYS: New Year's Day; Twelth Night; Good Friday; Easter Monday; Labour Day (1st May) holiday when no work takes place; Ascension Day; Whitsun Monday; Midsummer Day; All Saints' Day; Independence Day (6th December); Christmas Day and Boxing Day.

POLICE/AMBULANCE/FIRE: Police 38063; Ambulance; Fire and First Aid 005.

GENERAL: Government ice-breaker assistance available when needed.

AUTHORITY: Port of Rautaruukki Oy, Port of Raahe (Lapaluoto).

RAUMA: 61.08 N. 21.30 E.

PORT LIMITS: Southern entrance port limit when passing Tankar, northern entrance port limit when passing Riskonpoella.

DOCUMENTS: 2 Crew Lists and 1 Passenger List. Ship's Register, Customs Documents, Ship's Papers etc. (Ship's Agent will give the necessary advice).

PILOTAGE: Pilot station at Kylmapihlaja-island, Lat. 61° 08′ 7″ N. Long. 21° 18′ 4″ E. International Pilot signals, VHF Channels 16 and 13. Fairways Santakari 17 ft.; Valkeakari 24 ft.; deep passage 28 ft.

ANCHORAGE: Ample area for anchorage in Archipelago.

RESTRICTIONS: Entrance channel for 24 ft. maximum draft usable in all conditions, the 28 ft. channel to be used in daylight only. Harbour open all year round.

MAX. SIZE: Draft limit only.

HEALTH: Event any suspect contagious disease ask for orders by wireless. Port Regulations do not allow such a ship to come alongside or even closer than 350 yards. Pilot must not leave ship before allowed by the Doctor. Pilot does not board an infected ship but ship piloted to safe anchorage by pilot boat.

RADIO: Helsinki Radio, Hanko Radio, Mariehamn Radio.

VHF: Rauma VHF Channels 26 and 28, Channel 16 used for calling Pilot, tug etc. Channels 13 and 12 for further operations.

RADAR: When required pilot station radar used for advising Pilot onboard.'**TUGS:** 1 port owned tug 1,260 h.p. Usually one extra tug of 1,160 h.p. or 600 h.p. available but not guaranteed. An early notice recommended if more than 1 tug needed.

BERTHING: Hakuni outer quay 270 m., depth 22 ft. used for loading forest products. Central quay 410 m., depth 22-24 ft. used for forest products loading and discharging bulk cargoes. Laitsaari quay 300 m. 28 ft. paper loading.

Inner harbour 300 m. 13-16.75 ft. timber loading.
Chemical quay No. 1 16.75 ft. liquid produce load/discharge.
Chemical quay No. 2 23 ft. liquid produce load/discharge.
Oil quay one berth 24 ft. oil load/discharge.

CRANES: Central quay two 6 tons; one 5 tons; two 3 tons. Five mobile cranes 5-30 tons, available.

STEVEDORES: 24 hours notice to Agent recommended.

SPECIALISED CARGO HANDLING FACILITIES: 400 m. berth specially equipped for handling bulk cargoes, mainly china clay, sulphur, coal, etc.

No special equipment for containers, but smaller containers can be handled by harbour cranes.

Good berths for roll-on/roll-off traffic.

Different kinds of liquid chemicals can be handled in special berths.

MEDICAL: Advance notice recommended if possible. Hospital available (231 beds).

TANKERS: One berth, draft 24 ft. 15 in. cargoline 1,500 t.p.h. slop discharge facilities by tank-trucks.

DENSITY: 1004-1003.

FRESH WATER: Fresh water available on quay. Charges depending on amount taken.

FUEL: Fuel brought by tank-trucks.

GANGWAY/DECK WATCHMEN: Available if wanted. Watchmen supplied by private company.

OPENING/CLOSING HATCHES: Performed by ship's crew or by Stevedores at request of ship.

CUSTOMS ALLOWANCES: Tobacco: 6 day's ration (about 200 cigarettes or 200 gr. tobacco). Wine and/or Spirits: 1 opened bottle of wine or liquor, subject to Customs Regulations.

CARGO GEAR: Central quay shore gear available other quays mobile gear or ship's gear.

CONSULS: Denmark, Norway and Sweden.

REPAIRS: All types available.

DRY DOCKS: Rauma-Repola Oy: Dry dock 505 ft. 9 in. by 70 ft. 4 in. by 24 ft. 7 in. all sorts of repairs. Hollming Oy: Slipway for ships up to 600 d.w.t.

SURVEYORS: Ship's Agent will give advice.

REPATRIATION: Repatriation and signing on or off.

AIRPORT: Pori – airport 50 km. away. Regular connections.

TIME: Local time is 2 hours ahead of Greenwich (Long. 30° E.).

HOLIDAYS: See "Turku".

POLICE/AMBULANCE/FIRE: Police, 002 and 003; Ambulance, 006; Fire alarm, 005.

TELEPHONE: Oil quay only, connection Fmk 40.00.

SERVICES: Compass adjusting facilities and compass adjusters.

SHORE LEAVE: No restrictions.

IDENTIFICATION CARDS: Normally no identification card needed but passport or seaman's book preferable.

DEVELOPMENTS: New 29.5 ft. entrance channel under construction, plans for new berths with equal depth made.

DELAYS: No delays in berthing, loading and discharging weather permitting.

AUTHORITY: Traffic Manager and Harbour Master.

SAIMAA CANAL AND PORTS IN LAKE AREA OF SAIMAA

(See Plan Book)

APPROACH CHANNELS: The canal can be reached from the international waters of the Gulf of Finland through an approach channel South of Someri. The channel passes the Island of Vihrevoi and continues, at the Island of Malyj Vysotski, as the Vysotski-Viipuri Channel, from which the approach channel departs at a distance of 10 km. from Malyj Vysotski. The length of the approach channel from the point of departure to the Brusnitchnoe Lock is 14 km. The distance from the international water area to the Island of Vihrevoi is 94.5 km. and the length of the section Vihrevoi-Malyj Vysotski 12 km. The total length of the channel from the territorial waters of the Soviet Union to the Brusnitchnoe Lock is thus 131 km.

From the territorial waters of Finland the canal may be reached through the so-called coastal channel starting from the Finnish border at the island of Santio and joining the above sea channel at the Island of Vihrevoi. The length of the channel from the border to Vihrevoi is 49 km. and the overall length of the Brusnitchnoe Lock is 85.5 km. The channel and its refuge harbours have been marked on the Soviet sea charts. Nos. 1131 and 1132 and on Finnish charts Nos. 11 and 12. The coastal channel may only be used by Finnish vessels while vessels of other nationalities must use the sea channel, except for foreign tugs.

Canal: The length of the canal on the Finnish side of the border is 23.3 km. and that of the part on the Soviet side 19.6 km. The overall length of the Saimaa Canal is thus 42.9 km. The average difference in the height between Lake Saimaa and the Gulf of Finland is 75.6 m. The canal has 8 locks, the heights of fall of which range between 5.54 m. and 12.69 m. Earth transports will use the 7 moving bascule bridges and the 6 stationary bridges across the canal.

SEASON AND HOURS: The natural open-water season of the Saimaa Canal lasts an average of 211 days. In mild Spring and Autumn seasons the open-water period lasts 225 days. Since most vessels using the canal have been strengthened for navigation in ice, a season of navigation of almost 8 months will probably be normal every year. The season begins at the turn of April-May and ends in mid-December. The locks of the canal are provided with ice-melting equipment and they will not form an obstacle for lengthening the season of navigation. On the other hand traffic will be obstructed by freezing of the water system of Saimaa and by pack ice formations in the bottom of the Gulf of Finland. As to the water system, the farther North one goes the earlier will the waters of Lake Saimaa freeze in Autumn and the later will the ice melt in Spring.

The opening and closing of the season of navigation on the canal are decided each year by the Finnish and Soviet Canal Delegates. The closing date of the canal will be announced in the daily papers of Helsinki and Lappeenranta not later than 7 days before the day of closing, but for the opening day 1 day's notice is given.

During the season of navigation the Saimaa Canal is kept open throughout the day. The administration centre of the canal will be on continuous duty.

PILOTAGE: Pilotage in the Soviet area on the sea channels between Vihrevoi-Brusnitchnoe and on the coastal channel between the border and Brusnitchnoe is carried out by the Soviet Pilot Service. All vessels must use a Pilot on these channel sections.

Pilotage on section Brusnitchnoe – mouth of the Saimaa Canal on Lake Saimaa (or Lock of Malkia) is carried out by canal Pilots submitted to the Canal Office. Pilotage is normally carried out in two parts, on section Brusnitchnoe – the Lock of Palli and on section the Lock of Palli – the mouth of the canal on Lake Saimaa. All vessels, excluding Finnish small vessels and floating objects less than 25 m. in length, shall use a Pilot when proceeding through the canal. The Canal Office may grant upon application a Master of a vessel the right to navigate his vessel on the canal without a Pilot provided that the Master of the vessel has passed an examination of the Canal Office. In navigation from the Gulf of Finland the Pilot must be ordered from the Viipuri Section of Inflot 12 hours before the arrival at the point where the Pilot is taken on board. The order must be checked 2 hours before the start of pilotage. To avoid excessive work by the Pilot Service and to eliminate delays special attention is to be given to the accuracy of the time the pilotage is to be started, particularly in the last notifications.

In navigation from Lake Saimaa the Pilot must be ordered from the Canal Office 12 hours before entrance into the canal. The order must be checked 2 hours before pilotage is to be started. In navigation from the Gulf of Finland a canal Pilot need not be ordered separately. Similarly, a Soviet Pilot for the approach channel need not be ordered separately when the vessel proceeds from Lake Saimaa. These orders will be placed by the Finnish and Soviet authorities concerned.

Pilotage in the water system of Saimaa is carried out by Pilots of the National Board of Navigation in Finland. The order for Pilots shall be made in good time to the Pilot station of Lauritsala.

MAX. SIZE: The canal can be used by vessels with dimensions not exceeding the following:

Length	82.0 m.
beam	11.8 m.
draft	4.35 m.
height of mast	24.5 m.

The draft of a vessel in tow, however, shall not exceed 4.5 m. For vessels larger than those mentioned above, a permit for navigation on the canal may be granted upon application by the Canal Office of the Saimaa Canal.

The permit may contain regulations concerning the structure or equipment of the vessel or special provisions pertaining to navigation of the vessel on the canal such as good manoeuvrability, liability to wait or speed restrictions.

The Canal Office of the Saimaa Canal may also grant a vessel or equipment with slightly larger dimensions, carrying exceptional cargo, a Trip Let Pass for one passage through the canal.

The Rules and Regulations for Traffic on the Saimaa Canal also contain more detailed directions – among others on the permissible dimensions of vessels in tow and timber rafts using the open canal sections.

NEW VESSELS: When designing new vessels, to be used also in traffic through the Saimaa Canal, the designers are advised to consult the main dimensions and the structure of the vessels with the canal authorities. The conditions of navigation in the canal depend, first of all, on manoeuvrability, though certain other factors are also important.

MAXIMUM PERMISSIBLE SPEED AND TIME OF PASSAGE: The highest permissible speed on the actual channel of the Saimaa Canal is 9 km./hr. for vessels with a draft greater than 3.9 m. For vessels navigating in lesser drafts the speed is graduated within the limits of 9–15 km./hr. depending on the draft. In the lake parts of the Canal the highest permissible speed varies between 15–18 km./hr. depending on the size of the vessel. Detailed regulations available from the Canal Office. The time of passage through the part of the Canal provided with locks (mouth of the Canal on Lake Saimaa–Lock of Brusnitchnoe) is 6–8 hours depending on waiting time at locks caused by heavy traffic volumes, and on size of vessels.

SIGNS AND SIGNAL LIGHTS: The sign system of the approach channel of the Saimaa Canal, the canal and the channels on Lake Saimaa is adequate to ensure safe navigation throughout the day, also at night and in poor visibility.

The approach channel is provided with beacons, light buoys and signs in accordance with the lateral system. The signs have been erected by Soviet authorities. The illumination and the signalisation systems of the Saimaa Canal are based on the same principles with beacons and signs, but in the signal system of the canal, sign lanterns, signboards, line markers, water traffic signs and radar reflectors have been used. The colour of sign lanterns is orange on the West bank and green on the East bank of the canal. In marking of the lake channels of Saimaa according to the cardinal system, leading and warning lights, light buoys, range beacons, landmarks and signs have been used. Information of the marking of the water system of Saimaa has been issued as a booklet by the National Board of Navigation in Finland: "Sisavesistojen loistot I 1971" – "Beacons of Inland Water Areas I 1971".

RADIO: There are two radiotelephone networks for marine use in the sphere of influence of the Saimaa Canal. On the frequency of 160 mHz reserved for actual marine radio communications there are also the Pilot radiotelephone and the public radiotelephone networks.

The Pilot radiotelephone network covers all stationary radiotelephone equipment at all locks, on the Kansola Bascule Bridge, at Pilot stations and in the traffic office in the administrative building at Mustola as well as portable radiotelephone apparatus used by canal Pilots. The radiotelephone equipment of the canal Pilots operate on Channel 11 of the international marine radio. The telephone of the Brusnitchnoe Lock and the radio telephone in the Administrative Centre of the canal are also provided with a general calling and safety Channel 16.

When approaching from the sea the vessel makes a radio contact with the Brusnitchnoe Lock by using Channel 11. After this all radio communications required by navigation on the canal also use Channel 11. On Lake Saimaa, radio communications move over to Channel 13 on which the traffic office of the Saimaa Canal and the Pilot station of Lauritsala are also able to operate.

The general radiotelephone network on Lake Saimaa (the so-called Saimaa Radio) uses Channels 23–28 of the international marine radio. The network covers the entire region of the water system of Saimaa extending from Lappeenranta to Iisalmi and Lake Pielinen. Channel 24 is the calling channel of the Saimaa Radio.

Two marine radio stations for general traffic have been built at Nuijamaa and Virolahti especially for navigation on the Saimaa Canal. Both radio stations are on duty and they are remote-controlled from the Coast Station of Kotka. The stations have the calling and safety Channel 16 and a calling Channel 24 for public traffic. The Nuijamaa Station operates on Channel 28 and the Virolahti Station on Channel 23. The range of the Nuijamaa Station extends from South of Viipuri to Southern Saimaa and the range of the Virolahti Station covers the entire Bay of Viipuri. The stations can be called either on Channel 16 or on the operating Channel. The Kotka Radio calls vessels either on Channel 16 or 24.

The principal purpose of both the Saimaa and the Kotka Radios is to ensure the communications of the safety service of navigation. These stations may also be used to transmit calls to the public telephone network – also to foreign countries – or vice versa, to receive calls from the public telephone network.

AUTHORITIES: Board of Management of the Saimaa Canal, Lappeenranta.

Viipuri section of Inflot. Vyborg, USSR.

National Board of Public Roads and Waterways in Finland. Waterways Department, Helsinki.

THE HARBOURS OF THE LAKE AREA OF SAIMAA:

Mustola Harbour: Situated between Mustola and Soskua locks in the Saimaa Canal:

4 quays, 80 m. each. Draft alongside 4.35 m. Roll-on/Roll-off facilities are provided. 1 Coles mobile diesel electric crane: arm 9.14 m., reach of arm 3.66 m., lifting capacity 35 tons. Arm 18.3 m., reach of arm 18.3 m., lifting capacity 4 tons. Grab of capacity 2,500 litres or 1,250 litres can be installed. Possibility to hire further mobile cranes.

Lappeenranta Passenger Harbour: Situated in Saimaa Lake at Lappeenranta town:

New concrete quay with passenger terminal. Draft alongside 4.35 m. Room for 2 ships with a draft of 4.35 m. and for 3 ships with a draft of 3.0 m. Pilotage distance from canal entrance 6 nautical miles.

Kaukas Oy Pulpmill Factory Discharging Place:

Draft alongside 4.35 m. (unofficial). Mobile crane for discharging wood into water. Pilotage distance from canal entrance 1.5 nautical miles.

Enso-Gutzeit Oy Paper Mill Quay: At Imatra Kaukopaa:

Length of quay 70 m., draft alongside 4.35 m. Pilotage distance from Canal entrance 25 nautical miles.

Joensuu Town Harbour (Ukonniemi):

Length of quay 140 m., draft alongside 4.35 m. Pilotage distance from canal entrance 38 nautical miles + 45 nautical miles + 60 nautical miles + 44 nautical miles.

Savonlinna Town Harbour (Haislahti):

Length of quay 80 m., draft 4.35 m. No cranes. Pilotage distance from canal entrance 38 nautical miles + 45 nautical miles.

Ristiina Harbour:

Quay can accommodate 1 ship. Permissible draft 4.2 m.

Oy Wilh. Schauman Ab Paaskylahti Harbour at Savonlinna is planned. Quay will be built to accommodate 1 vessel.

Kuopio Oil Harbour:

Harbour located at Kelloniemi in Kuopio Town close to Oy Esso Ab storage in rock. Harbour is owned and built by Oy Esso Ab.

One of the two planned berths for ships is completed. The harbour is provided with oil discharge equipment. Permissible draft 4.2 m.

Kuopio Town Harbour (Kumpusaari):

Berth for 1 dry cargo vessel and 1 tanker. Permissible draft 4.2 m.

Varkaus (Ahoniemi Oil Harbour):

Harbour is located on the East bank of the Southern entrance fairway about 6 km. from the centre of the town. There is room for 1 ship; permissible draft 4.2 m.

Varkaus:

Harbour located at the South end of Taipale canal at Westbank. The Harbour is not built for a harbour but as waiting berth for ships passing Taipale canal. 1 ship can be berthed and permissible draft is 4.2 m. There are no warehouse and loading equipment, but A. Ahlstrom Osakeyhtio is using the berth for shipping paper to England. Loading is effected by the factory's labour and machines. Goods are transported to the port by lorries.

Rapasaari Harbour:

Situated in Saimaa Lake at Lapeenranta town. One quay, length 80 m. Permissible draft 4.35 m. Railway to the quay. Possibility to hire mobile cranes. Pilotage distance from the Canal entrance 6 nautical miles.

Vuoksi Harbour:

Situated in Saimaa Lake at Imatra town. One quay, length 80 m. Permissible draft 4.35 m. Possibility to hire mobile cranes. Pilotage distance from the Canal entrance 24 nautical miles.

TOLKKINEN (Tolkis): 60.20 N. 25.35 E.

PILOTAGE: Pilot arrives from port station at Emsalo (tel. 911-27710). Station equipped with VHF, radiotelephone and radar. Pilotage distance to port 22 miles.

APPROACHES: Max. draft of fairway from sea, 23 ft. 8 in.

TUGS: One tug available, 350 h.p.

BERTHING: Tolkis Cellulose Quay, depth 23 ft. Tolkis New Quay, depth 17 ft. Oil Harbour (see "Skoldvik").

CRANES: Tolkis New Quay equipped with 2 movable cranes. Lifting capacity 2.5 tons. with grabs.

DENSITY: 1004.

FRESH WATER: Available by lorry. Minimum quantity 5 tons.

TORNIO: 65.51 N. 24.09 E. (See Plan Book)

The outharbour of Tornio is Roytta situated about 6 miles S.W. of Tornio.

DOCUMENTS:

2 Crew Lists.
2 Provisions Lists.
Passenger List.
One set of Bills of Lading, Ship's Papers, Health Documents.

PILOTAGE: AJOS pilot station VHF Channel 16. Pilot to be taken on board by lighthouse "Kemi 2" in position 65° 30.3′ N., 24° 22.5′ E., 10 miles from Ajos.

ANCHORAGE: In Roads, depth is 24 ft.

MAX. SIZE: At same time there can be 2 vessels of 100-120 m. length, draft 21 ft. 06 in.; 2 vessels of 50-60 m. length alongside Main Quay; and 2 vessels of 50-60 m. length, draft 14 ft. at Old Quay.

RADIO: Vaasa Radio/OHX or Harnosand Radio, Sweden/SAH.

TUGS: No tug available at Tornio. to be ordered from Kemi 12 hours before.

CRANES: Three 20 ton mobile cranes for general cargo and several cranes for discharging bulk cargo.

STEVEDORES: Ordered by Agent (Telex 35–12). Agent must be given 24 hours ETA. Normal working time 0700–1100, 1200–1600 hrs. Warning for overtime must be given before 1100 hrs., the final confirmation before 1400 hrs.

DENSITY: 1000.

FRESH WATER: Fresh water can be delivered by tank lorry (8 tons).

FUEL: Ordinary fuel by lorries from Kemi.

OPENING/CLOSING HATCHES: By the ship's crew.

CUSTOMS ALLOWANCE: 100 cigarettes or 100 grams tobacco and 1 bottle spirits.

CONSULS: France tel. 40473; Sweden tel. 41751; Norway 14411.

REPAIRS: No docks but accommodation for small repairs.

AIRPORT: At Kemi, 20 km. from Tornio; served by Finnair.

TIME: GMT plus 2 hours.

POLICE/AMBULANCE/FIRE: Police 003; Fire 005; Ambulance 006 and 40428; Salvage 47472.

AUTHORITY: Tornion Satamakonttori.

TURKU (Abo): 60.27 N. 22.15 E.

DOCUMENTS: See "Oulu".

PILOTAGE: Telegram to Agent with 24 hours ETA to Sea Pilot station (State Pilots) Uto, contact Pilot station via Hango Radio or at shorter distance by VHF. Coastal Radar service available. When approaching port ETA by VHF to Port Information Centre, international Channel No. 12 for Harbour Pilot. Cutter whilst in action, same channel, but takes orders from Information Centre only.

Pilot cutters painted red with white circular field marked "L" on the bows. Flying flag in daylight, showing red and white lights vertically at night. Coming out when required to Pilot station 0.75 mile from Main Harbour. Call signals: International flag "G", at night 3 long blasts. No special boarding measures. All ships arriving from sea will get necessary information from Sea Pilot, whose service is compulsory. Harbour Pilot not compulsory.

ANCHORAGE: Outer anchorage at Bay of Airisto, 2 miles from Port, 15-18 m. In practice all ships taken into port without anchoring or waiting.

MAX. SIZE: Maximum draft in Commercial Harbour 30 ft. fresh water. In Oil Harbour 29 ft. 6 in. fresh water. Length and breadth of minor importance. No tides.

HEALTH: International Quarantine flag required in case of suspected disease or fever including preliminary report by VHF, otherwise, ask Agent.

RADIO: Hango (Hanko) radio and Mariehamn Radio. In addition these have telephone and VHF service. Local telephone network on VHF Channel 26.

TUGS: Off Harbour Pilot station Pikisaari/Beckholmen, further out on application. Advisable apply for tugs in advance. 4 tugs available.

BERTHING: Priority given to arriving and departing passenger ships on regular lines. 6 hydraulic stern loading roll-on/roll-off berths and 3 without hydraulics..

Total length of quays 4,896 m.

Canal Bank quay	Depth 27 ft.
West quay	Depth 30 ft.
Coal quay	Depth 18 ft.
Oy Wartsila A/B	Depth 18 ft.
Linnanselka/Slottsfjarden quay	Depth 27 ft.

Container facilities available.

CRANES:

Quay	*No.*	*Capacity (tons)*	*Reach of arm (m.)*	*Type*
Canal bank	7	5.0	15	Movable
	1	7.0-5.0	5.5-12	"
Linnanselka/ Slottsfjarden	7	5	20	"
	1	60-40	20-24	"
	9	6	20	"
Oy Wartsila Ab Crichton-Vulcan (only for dockwork)		80-40-10	17.5 35-36	Stationary
Valmet Oy Pansion Telakka	1	30-6	19-39	Floating for dockwork only

DENSITY: 1004.

STEVEDORES: Agent should be well informed about ETA and Master's Requirements. Normal working hours: 0700–2230 hrs.; Saturdays and days preceding public holidays 0700–1430 hrs. The Post Office: 0900–1600 hrs. Saturdays and days preceding public holidays 0900–1400 hrs.

MEDICAL: All medical and hospital facilities available. No special requirements regarding inoculations, etc.

TANKERS: No special requirements. Small slop discharge facilities. 1 berth, depth 29 ft. 6 in. for larger ships.

FRESH WATER: From pipe-lines along berths. Price approx. 5 fmk. per ton.

FUEL: Most grades available. No advance notice neccessary if ex. motor vehicles. In case of greater quantities: from Oil Harbour only. This requires advance notice to Agent.

DEVELOPMENTS: Entrance channel to Main Harbour is now dredged to 33 ft. Container Harbour being built. Outer Harbour planned. Recent acquirement: one 60-ton moveable electric quay crane. Draft alongside 30 ft.

GANGWAY/DECK WATCHMEN: Gangways to be rigged out so that they do not obstruct quay crane movements. Watchmen customary, but not necessarily hired.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

IDENTIFICATION CARDS: Not needed.

CONSULS: The following countries are represented by Consuls or

vice-consuls in Turku: Austria, Belgium, Denmark, France, Great Britain, Greece, Honduras, Iceland, Italy, Norway, Portugal, USSR, Spain and Sweden.
REPAIRS: All types of repairs possible.
DRY DOCKS: Graving dock: length 600 ft. (183 m.), width of sluice gate 85 ft. (26 m.), depth on sill 26 ft. 3 in. (8.0 m.).

Floating dock: lifting capacity 4,000 tons, max. length of ship 358 ft. (109 m.), inner width 59 ft. (18 m.) max. draft 16 ft. 6 in. (5.0 m.). By agreement the shipyard's 80-ton crane can be used in port traffic if such is needed. Tel. 359 500, Telegrams "Wartsila". Telex 62-228.
REPATRIATION: Yes, good connections everywhere.
AIRPORT: 4 miles from port, regular lines.
TIME: GMT plus 2 hours. No alterations during the year.
HOLIDAYS: New Year's Day (January 1st); Twelfth Night (January 6th); Good Friday; Easter Bank Holiday; Midsummer Day; All Saints' Day; Independence Day (December 6th); Christmas Day; (December 25th); Boxing Day (December 26th).
POLICE/AMBULANCE/FIRE: Fire 005; Police 002; Ambulance 006.
GENERAL: Ice-breakers maintain Winter traffic. 2,000 and 800 h.p.
TELEPHONES: Ships' telephones available.
AUTHORITY: Kanavaniemi, Turko/Abo.

UUSIKAUPUNKI: 60.48 N. 21.24 E.

APPROACHES: 3 fairways lead to harbour through sheltering archipelago; Uto-Uusikaupunki, 78 miles; Isokari-Uusikaupunki, 13 miles; Kylmapihlaja-Uusikaupunki, 24 miles.

Good sheltered anchorage in the roads. Depth of fairways 9 m.
DOCUMENTS:

Agent will prepare during clearance:
2 Ship's Report.
1 Declaration List, arrival (Board of Navigation)
1 Declaration List, Departure (Board of Navigation)
To be prepared before Arrival:
2 Provision Lists (own provision of the ship)
2 Special Lists (must be signed by each member of the crew)
2 Crew Lists
Bill of Admeasurement
Certificate of Registry
Ice-class Certificate (during Winter months, 1st December-30th April, issued by hull surveyor)
Bill of Beaconage (issued by Customs).

PILOTAGE: Embark Pilot at Isokari or Uto Pilot stations. Distance through archipelago Isokari-Uusikaupunki 13 miles, Uto-Uusikaupunki 78 miles. Under normal circumstances first fairway recommended. During Winter months, if ice-situation difficult in Gulf of Bothnia, traffic goes via Uto.

Both pilot stations equipped with radio 2182 kHz, Channels 16 and 24, VHF duplex-Channels 18, 20 or 22 and radar. Pilot-boat red, with letter "L" and fitted with VHF Channels 13 and 16. Pilot boards usually between Sandback-Isokari, to where "Hauteri" light leads in line 134.5°–314.5° (T). Notice of ETA at least 4 hours prior reaching station.
ANCHORAGE: Many areas of safe anchorages in Archipelago. Pilot advises.
RESTRICTIONS: No entry restrictions. No tide. During North and East winds sea-level can fall about 40 cm. below normal, which may sometimes delay deep loaded vessels reaching port.
MAX. SIZE: Longest quay 180 m. depth alongside 9 m.
HEALTH: Pratique not necessary. In the event of any disease/fever on board or in last port of departure, vessel has to inform before arrival, hoist quarantine-flags, or in darkness 2 lights, red light above white, showing all round horizon.
RADIO: Mariehamn Radio OFH; Helsinki Radio OHG.
TUGS: 2 available; normally tugs join vessel at port, ship's lines used.
BERTHING: *Kemira Quay:* 180 m. long, owned by fertiliser factory Kemira Oy, has depth 9 m. alongside, two 8 ton cranes, two discharging pipes, one for discharging ammonia at minus 32° C. and one for sulphur acid. Discharging capacity depending material 140-170 tons/hour/crane and loading/discharging bags 45-50 tons/hour/crane.

Esso Quay: 40 m. long, owned by Oy Esso AB, depth in channel and alongside 5 m. Terminal is used for discharging LP gas.

Telakka Quay: 140 m. long, owned by Uudenkaupungin Telakka Oy, has depth alongside 5 m. Quay is only used for ship repairs, and fitting works for new buildings. There is also a floating dock with 5,000 ton capacity.

Hepokari Pier: 90 m. long and 18 m. breadth, owned by town. Channel and alongside depth 7 m. There is terminal on South side for Ro-Ro traffic.

Saunasilta Quay: 60 m. long and depth 3.5 m., owned by town. Used only by small coasters.
STEVEDORES: Available. Contact Agent.
MEDICAL: Hospital facilities, vaccination, certificates, etc., available. Contact Agent.
TANKERS: For discharging and loading liquid ammonia – Marine Loading arm "Luceat/Chiksan, Type RCMA" 8 in., ASA 300.
DENSITY: No tide, density 1004.
FRESH WATER: Water-hoses, about 20 t.p.h.
FUEL: Fuel available, contact Agent.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Normally carried out by crew.
SHIP CERTIFICATES: All certificates according to International Convention for the Safety of Life at Sea, Class Certificate, etc.
CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes per each member of the crew. Wine and/or Spirit: 1 bottle wine or spirit per each member of the crew.
CARGO GEAR: No additional requirements.
IDENTIFICATION CARDS: Not needed.
CONSULS: None.
REPAIRS: All types of deck and engine repairs possible.
DRY DOCKS: Uudenkaupungin Telakka Oy has a floating dock, lifting powers 5,000 tons, draft 6.1 m., breadth 19.6 m., and length 130 m.
REPATRIATION: Facilities exist for effecting crew changes and arranging any necessary repatriations.
AIRPORT: Distance to Turku Airport about 90 km. Airport is served by regular Airlines.
TIME: GMT plus 2 hours, no alterations during the year.
HOLIDAYS: Official Holidays are: New Year's Day (January 1st); May 1st; Midsummer Day (Saturday between June 20th and June 26th); Independence Day (December 6th). Usually no work on those days.
POLICE/AMBULANCE/FIRE: Police 002 or 3002; Ambulance 3005; Fire 005 or 3005.
TELEPHONES: Available.
SHORE LEAVE: Crew members are allowed ashore.
AUTHORITY: Uudenkaupungin Satamatoimisto.

VAASA: 63.06 N. 21.36 E. (See Plan Book)

DOCUMENTS:
3 Crew Lists.
3 Passenger Lists.
2 Customs Documents.
2 Health Documents.
5 Manifests.
5 Bills of Lading.

PILOTAGE: Compulsory for ships arriving from abroad. 3 Pilot stations: From S. = Ronnskar Pilot for ships draft 18 ft. to 26 ft. From S.W.-W. & N.W., Norrskar Pilot = 26 ft. From N. Ritgrund Pilot = 16 ft.

Pilot signals: Letter "G" as flag – light or sound. Radio telephone call: Pilots watching 24 hours on 2182 kHz, also VHF.

Pilot vessel: 30 ft. motor yacht with wheelhouse and radar. Hull red all over with letter "L" painted on bow.

Pilot vessel not cruising in open sea. Meets ship well outside Archipelago indicated on charts.

Harbour Pilot available in port from Vasklot Pilot Station. Tel. 12 496.
ANCHORAGE: In the area of port – outside breakwater about 2 miles W. of port of Vasklot. Elsewhere according to Pilot's advice.
RESTRICTIONS: No locks. Fairway lighted all the way.

No tide, but water level may be reduced by up to 20 in. in Spring and early Summer, or increased by 10 to 25 in. in Autumn.
MAX. SIZE: Depth alongside piers up to 26 ft. 3 in. At the Oil Harbour, max. recommended LOA is 610 ft.
HEALTH: See "Documents" – no restrictions. Hospital and Doctor for any purpose available.
RADIO: Vaasa Radio – OFW 2803 kc/s.
RADAR/VHF: No radar service in port area. Pilot vessels at sea Pilot stations equipped with radar; also Ronnskar Pilot station on same island. VHF radios on Pilot stations, harbour tug-boat and harbour office.
TUGS: Harbour tug-boat and ice-breaker m/s *Vaasa* available 24 hours round. 650 h.p. Radio telephone/VHF – call signs OGWE. Charge according to size.
BERTHING: 2 piers of 180 m. length and the Reins Quay of 240 m. length. Depth 26 ft. 3 in. There are three 5-ton cranes on the South Pier.

The Ferry Pier, 106 m. length, depth alongside 5.7 m. with berths for Ro-Ro traffic.

The Oil Harbour is at Vasklot. Depth alongside 26 ft. 3 in. Tankers discharge through three arms of 500 m/m and 400 m/m diameter.
STEVEDORES: ETA as usual according to C/P to Agent, etc.
MEDICAL: If serious illness advance notice to Agent necessary. Coastguard has an aeroplane stationed at Vaasa; coast radio station will advise and arrange.
DENSITY: Nearly fresh water 1002-1004. No tide.
FRESH WATER: Available, no limit. Direct from quay-side, through pipes, rate about 25 t.p.h.
FUEL: All grades of bunker fuel available – direct from oil jetty or by lorries to berth.
FIRE PRECAUTIONS: Dry-cargo ships; no smoking in holds. Tankers: usual restrictions. Tankers with petrol cargo not allowed to berth at dry-cargo piers.
GANGWAY/DECK WATCHMEN: Not compulsory, ship's own crew can be used. Police watchmen available.
OPENING/CLOSING HATCHES: Normally carried out by crew.
CERTIFICATES:
Safety Equipment Certificate.
Stability Certificate.
Load Line Certificate.
Derrick and Hoisting Gear Test Certificate.
Derating Certificate.
Nationality Certificate.
Measurement Certificate.
Ice-class Bill.

CUSTOMS ALLOWANCES: Tobacco: Max. 200 cigarettes per man or 50 gr. of tobacco. Wine/Spirit: Maximum 1 bottle of each per man to be opened and used on board only.
CARGO GEAR: Cargo gear test book to be in order – all gear to be tested within a year otherwise risks for breaks in discharging/loading.
IDENTIFICATION CARDS: Not needed.
CONSULS:
Belgium
Denmark
France
Great Britain
Netherlands
Norway
Sweden
REPAIRS: Shipyard in Vaasa owned by Wartsila Oy. All deck and engine work can be carried out; slip for ships up to 1,500 d.w.t. Nearest dry dock Rauma. Harbour tug acting as salvage vessel, diver on board, all kinds of underwater cutting and welding, pumps, etc.
REPATRIATION: Can be carried out easily.
AIRPORT: Vaasa Airport (about 8 miles from town) served by regular airlines, domestic and abroad, Stockholm, U.K., Continent, etc.
TIME: Local time GMT plus 2 hours.
HOLIDAYS: Working hours in port: 0800–1200, 1300–1700 Monday–Friday, Saturday: 0800–1200. Sunday free. Working days in port: Monday–Saturday. Working days ashore: Usually Monday–Friday. All banks closed on Saturday. Shops open all weekdays. Other holidays: 6th December – Independence Day – Christmas, etc., as usual.
TELEPHONES: Can be arranged on board.
POLICE/AMBULANCE/FIRE: Tel. numbers Vaasa: Police 112 034, 112 374; Ambulance 005 112 641; Fire 005. Ambulance, aeroplane, coast guard: Vaasa 113 751, 114 859.
GENERAL: Ships approaching port of Vaasa in Winter time (January-May) when sea area icebound, have to call any of Government ice-breakers operating in area or to inform harbour authorities of exact ETA – engine power, size and nationality, and whether strengthened for ice or not. Call signs, etc., for Government ice-breaker can be obtained from nearest coast radio station.
SERVICES: Compass adjusting available.
DELAYS: Only Winter time when Government ice-breaker is arranging, waiting or assisting in outbound convoys of ships.
AUTHORITY: Harbour Master.

VALKO (Walkom): 60.25 N. 26.17 E.

PILOTAGE: Pilot arrives from Pilot station at Orrengrund (Tel. (915)–53334, radio telephone). Station equipped with radar. Distance to port 12 miles.
APPROACHES: Max. draft from sea to fairway 24 ft.
TUGS: 1 tug available, 200 h.p.
BERTHING: *Walkom Quay:*
New Quay, length 300 m., depth 24 ft. South Pier (outer side) length 140 m., depth 24 ft.
South Pier (inner side) length 105 m. depth 18 ft.
CRANES: 5 mobile cranes, lifting capacity 2–6 tons. 1 shore crane, lifting capacity 6 tons. 1 shore crane lifting capacity 5–25 tons.
DENSITY: 1003.

VEITSILUOTO: 65.42 N. 24.37 E. (See Plan Book)

DOCUMENTS: See "Oulu".
PILOTAGE: Inwards compulsory for vessel in foreign trade. Boarding about 8 miles before Ajos. Ajos Pilot Station may be contacted on VHF Channel 16.
ANCHORAGE: Good holding ground about 1 mile from Rautakallio and by Koivuhauta 2 miles from harbour entrance.
RESTRICTIONS: No tide. Entry by day or night.
MAX. SIZE: See "Berthing".
HEALTH: See "Oulu".
TUGS: Available when required, charges according to net tonnage. Use ship's lines.
BERTHING: Length of Quay 552 m. plus Roll-on/Roll-off berth, depth 8.2 m., permitted draft 7.3 m.
STEVEDORES: Ordered by Agent, no ETA to stevedores necessary.
MEDICAL: Hospital at Kemi. Masters to advise if medical attendance required aboard.
FRESH WATER: Berth supply by shore installations.
FUEL: Ordinary fuel, diesel and gas oil. Deliveries by lorries only.
FIRE PRECAUTIONS: No special precautions. Company's fire-fighting corps.
GANGWAY/DECK WATCHMEN: Available but not compulsory.
OPENING/CLOSING HATCHES: Crew allowed open and close.
IDENTIFICATION CARDS: Not required.
CONSULS: Norway and Sweden, others at Kemi.
REPAIRS: Available at Kemi.
SHORE LEAVE: Crew members allowed ashore.
DELAYS: Not normally expected.
AUTHORITY: Harbour Master.

NOTES

Please also advise Shipping Guides Ltd.

France

AJACCIO: Corsica 41.55 N. 08.44 E.

DOCUMENTS:
Cargo vessels:
1 Crew List.
1 Passenger List.
1 Manifest.
Ship's Register.
Passenger Vessels:
3 Crew Lists.
3 Passenger Lists.
Ship's Register.
1 Manifest.

PILOTAGE: No advance notice required. Vessels call Pilot with 3 blasts on ship's siren. Pilot boat flies usual Pilot flag. Pilot joins approaching vessel at a line Isolella/Chapelle des Grecs. Available 24 hours a day. Pilot boat has VHF Channel 6.

ANCHORAGES: Several safe anchorages in harbour which can be indicated in advance by Ship's Agent.

MAX. SIZE: Length 200 m., draft 7 m. At anchor, no limit.

HEALTH: Health Officer boards on arrival. Pratique automatic unless suspected contagious disease on board, when it is necessary to notify Agent or Health authorities in advance by cable.

RADIO: ETA cables, etc., via Radio Grasse.

TUGS: Not required.

BERTHING: Regular vessels have priority at all berths.

STEVEDORES: Advice should be sent 24 hours prior to arrival. French vessels have priority of labour.

MEDICAL: No advance notice required in respect of medical attention unless case is urgent. All hospital facilities available. Except in the case of an epidemic in any country from which the vessel has sailed, no inoculations or vaccinations are necessary.

TANKERS: Max. draft 10 m., length 200 m.

FRESH WATER: Available at the berths.

FUEL: All grades available, 48 hours notice required.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CERTIFICATES: Ship's Register.

CUSTOMS ALLOWANCE: Tobacco, 2 oz. or 200 cigarettes per member of crew. Wine, no restrictions. Spirits 1×20 oz. bottle.

IDENTIFICATION CARDS: Required.

CONSULS: Greek, Dutch, Monaco, Italian, Danish, Swedish, Finnish.

REPAIRS: Minor repairs can be carried out.

DRY DOCKS: None.

REPATRIATIONS: Can be arranged by Ship's Agents.

AIRPORT: 8 km. from port. Served daily by Air France regular lines.

TIME: GMT plus 1 hour.

HOLIDAYS: 1st January; Easter Monday; Whit Monday; 1st May; 14th July; 15th August; 1st November; 11th November; 25th December. Cargo work can be arranged on all dates except 1st November.

POLICE/AMBULANCE/FIRE: Police 0.17; Ambulance 21.27.58; Fire 0.18.

TELEPHONES: Can be placed on board warships only.

GENERAL: Galley waste, etc., must not be discharged inside the bay.

DELAYS: In berthing can be expected in July and August up to 2 days. Delay in loading or discharging up to 5 days. At other times of the year maximum delay normally 24 hours.

AUTHORITY: Capitaine du Port.

ANTIBES: 43.35 N. 07.08 E. (See Plan Book)

DOCUMENTS:
(a) For Harbour Master:
Ships Papers.
Declaration of Exit and Entry.
Crew List.
Passenger List.
(b) For Customs:
Health Declaration.
Provision List.

PILOTAGE: Not obligatory for yachts. Port cannot receive pleasure boats longer than 40 m. Ensure pilotage authorities advised of ETA. VHF Channel 9 day and night.

ANCHORAGE: In winds of N.E. to S.E. anchorage in front of Antibes not advised. Recommended anchor in Bay de Golfe-Juan, in shelter of Cap d'Antibes, in direction of Juan-les-Pins. In winds from N.W. to S.W., good anchorages on East face of Cap d'Antibes, Bay of Garoupe, Bay of La Salis, Bay of Ilette.

RESTRICTIONS: Night entry not advised.

MAX. SIZE: For yachts in the old port, length 23 m., width 6 m., draft 3.5 m. For tankers, 1 berth only in tanker outer port. Max. length 110 m., draft 7 m.

TUGS: None.

TANKERS: A berth against dolphins, in Outer Port and strictly reserved for unloading refined fuels. See "Max. Size".

FRESH WATER: Oil companies have water point on berth in Outer Port.

FUEL: For pleasure boats only.

CONSULATES: None.

REPAIRS: For pleasure boats only. 2 slipways for boats of max. length 30 m.

REPATRIATION: Must be arranged through Consulates at Nice.

AIRPORT: Nice, Cote d'Azur. 15 km.

TIME: GMT plus 1.

POLICE/AMBULANCE/FIRE: Tel. Police 33.58.58 and 17; Ambulance 18; Fire 18.

SERVICES: Water and electricity on each pier.

AUTHORITY: Capitainerie du Port d'Antibes.

BASTIA: Corsica: 42.41 N. 09.27 E.

DOCUMENTS: See "Ajaccio".

PILOTAGE: Address, Vieux Port 20, Bastia. Tel. 315095. VHF Channel 16. Pilot boats, 12 m. long, black and white with navigation and pilotage lights. Previous advice to Pilots necessary before arrival. Pilot boards in bay of Porto Vecchio, North of the citadel.

ANCHORAGE: Anchoring not recommended in Easterly winds. Depth 15 to 30 m. in Porto Vecchio Bay. Bastia harbour: up to 4.50 m. deep.

RESTRICTIONS: Ships may enter harbour any time.

MAX. SIZE: Max. length: 160 m.; draft 7 m.

TUGS: None available.

BERTHING: Ships berth in order of arrival. Accommodation for about 10 ships. General Cargo.

STEVEDORES: Mooring carried out by watermen. Same address as Pilots.

MEDICAL: Medical controls made by Customs officer. Doctor available.

FRESH WATER: Supplied ashore.

FUEL: Available in small amounts.

FIRE PRECUATIONS: General rules. One wharf reserved for tankers.

GANGWAY/DECK WATCHMEN: Night watchman supplied by Agent.

OPENING/CLOSING HATCHES: Carried out by stevedores.

CUSTOMS ALLOWANCES: None on entry, 10 packets cigarettes when leaving. Wine/spirits unlimited when leaving.

IDENTIFICATION CARDS: Required.

CONSULS: Nearest at Ajaccio.

REPATRIATION: No facilities exist.

AIRPORT: Bastia 20 km. from ports. Departures every day to continent.

TIME: GMT plus 1 hour.

POLICE/AMBULANCE/FIRE: Police, 1881; Ambulance, 2281 733–2686; Firemen, 018-088.

TELEPHONES: As a rule telephone is put only on naval ships.

SHORE LEAVE: Crew may go ashore.

AUTHORITY: Department of Civil Engineering.

BAYONNE: 43.30 N. 01.28 W. (See Plan Book)

DOCUMENTS:
3 Crew Lists.
3 Passenger Lists.
3 Lists of Provisions on Board.
3 Individual Lists of Tobacco and Spirits.
3 Manifests of Cargo.
1 Set Bills of Lading.

PILOTAGE: Station extends 3 miles between the parallel of Ondres to the North and the limit of French territorial waters to the South. When weather permits, the pilot boat comes out of l'Adour and comes alongside ships near the light buoy situated W.N.W. of the port entrance. Contact Pilot at least 12 hours before arrival relaying through Bordeaux Arcachon Radio and stay on radio watch in the pilot zone.

ANCHORAGE: Ships must not anchor in the river.

RESTRICTIONS: In bad weather ships are led to take the Pilot at the pilot boat which is based on St. Jean-de-Luz and are led either towards l'Adour or to the anchorage of St. Jean-de-Luz.

MAX. SIZE: The Adour is accessible to ships of 160 m. length. Depth at the mouth varies with the seasons and are maintained by dredging. They are never less than 7 m. during Summer but during Winter can be reduced following Westerly storms. The height of the tide has to be added to these depths but the draft can never exceed 8.0 m.

HEALTH: A declaration of Health Form is lodged by the Customs Service on arrival; it must be completed by the Captain. In case of a suspect illness, advise Agent 24 hours in advance.

RADIO: Bordeaux – Arcachon Radio. The signal tower on the South side of the mouth, and the Harbour Master's Office, in the tower, has a VHF radio station, Channel 12.

TUGS: 1 tug available, 1,250 h.p., 10 tons bollard pull. Request for tug through the Agent. Tug waits at the entrance to the Adour.

BERTHING: When working berth is occupied, vessel is directed to a waiting berth. Large ships or those carrying dangerous cargo can be requested to wait outside the entrance.

Berth	*Max. Length Vessel*	*Recommended Draft*
Socadour	160 m.	25 ft.
Cement Wharf	160 m.	24 ft.
Satec Wharf	160 m.	24 ft.
Grain Silo	130 m.	24 ft.
SNPA Sulphur Quay	150 m.	25 ft.
Other berths	120 m.	22 ft.

STEVEDORES: Arrival must be notified to Agent 24 hours in advance.

MEDICAL: Medical attendance can be organised by the Agent without advance notice, Hospital and private clinic available. However, if medical attendance required as soon as the ship arrives, particularly at night, it is advisable to send a radio message 12–15 hours before the arrival of the ship.

TANKERS: No installation to receive residues. Two berths for unloading of refined products. Refinery de Midi: max. length 120 m., max. draft 6 m. Saint Gobain, length 150 m. max. draft. 24 ft.

FRESH WATER: Available at each berth, minimum supply 3 cu.m.

FUEL: Available by arrangements in advance through Agent or suppliers.

GANGWAY/DECK WATCHMEN: Not obligatory except for ships with dangerous merchandise on board.

OPENING/CLOSING HATCHES: Generally carried out by the crew.

CUSTOMS ALLOWANCES: 200 grammes or 250 grammes of tobacco for each crew member and for 8 days (must without fail be declared in the individual list of provisions). 1 bottle of wine or spirits (must without fail be declared in the individual list of provisions).

IDENTIFICATION CARDS: Not necessary – seaman's identity card sufficient.

CONSULATES:

Belgium
Brazil
Chile
Spain
Finland
Great Britain
Norway
Peru
Portugal
Sweden
Uruguay

REPAIRS: Running repairs to hull, machinery, radio and radar can be effected.

DRY DOCK: Usable length 98 m. Length on stocks 94.1 m. Width of entry 15 m. Depth above sill, neap tides 4.5 m., spring tides 6 m.

REPATRIATION: Possible for all countries as well as crew changes.

AIRPORT: At Biarritz: 7 km. away. Regular service with Paris. Two services per week to and from London.

TIME: European Standard Time: GMT plus 1 hour and GMT plus 2 hours from 2nd April to 1st October.

HOLIDAYS: 1st January; Easter Sunday/Monday; May 1st; Ascension Day; Whit Sunday/Monday; 14th July; 15th August; 1st November; 25th December.

POLICE/AMBULANCE/FIRE: Police, telephone 17 or 25.50.21., Anglet: 17 or 03.76.10 Boucau: 17 or 55.29.53. St. Leon Hospital: 55.84.04. Fire Station: 18 or 25.21.84.

TELEPHONES: Telephones on board not possible.

SHORE LEAVE: Crew are authorised to go ashore.

AUTHORITY: Harbour Master.

BORDEAUX (inc. Verdon, Bassens, Ambes, Pauillac, Blaye): 44.50 N. 00.34 W. **(See Plan Book)**

DOCUMENTS:

Tonnage Certificate.
2 copies Provisions List.
2 copies Personal Effects List.
2 copies Crew List.
Customs Clearance.
Crew Manifests.
Check List.

PILOTAGE: No Vessel may enter the waters of the Gironde Mouth without permission of the Harbour Master's Office.

Vessels should announce their arrival at BXA Buoy at least 24 hours in advance to the Commandant du Port de Bordeaux through Coast Station Arcachon – Bordeaux Port Radio. In addition they should contact the pilot boat and confirm their ETA and speed 12 hours in advance The ship will be able to keep in touch with the pilot boat where radio watches are kept as follows.

1. On 500 kc/s (radio) and 2.182 kc/s (radiotelephone): permanent watches from 0800 to 1000 hrs. GMT. 1200 to 1400 hrs. GMT. 1600 to 1800 hrs. GMT. 2000 to 2200 hrs. GMT.

2. On 2.182 kc/s, a general RT call (both in French and in English) at the end of each radio contact with the Pilots' station at Le Verdon.

These contacts are made on 1743 kc/s at the following hours (GMT) 0030 – 0300 – 0500 – 0630 – 0717 – 0915 – 1030 – 1230 – 1430 – 1600 – 1715 – 2000 – 2124.

Upon request a special radio contact can be obtained at any time.

Under normal weather conditions, the pilot boat remains near the landing buoy and the West Channel entrance. In bad weather the Pilot is sent on board as soon as boarding becomes possible, usually around buoy No. 10.

Vessels less than 70 m. long, for which pilotage from the sea to Verdon is not compulsory, may embark river Pilot at Le Verdon providing Masters have advised the Pilot station accordingly. Pilots can be contacted on VHF Channels 12 and 16.

ANCHORAGE: The normal waiting anchorage area is the roadstead of Le Verdon, depth 10 to 12 m. and sand silt bottom. The big tankers with more than 10 m. draft find a good anchoring area in the Saintonge roadstead with a depth of 15 to 20 m. (sand silt bottom).

MAX. SIZE: Verdon Petroleum Harbour. Tankers up to 350 m. length or approximately 250,000 d.w.t. can be accepted, with 75% load.

Bec d'Ambes: Tankers up to 32 ft. 6 in. draft, 225 m. length.
Pauillac: Tankers up to 32 ft. draft, 225 m. length.
Bassens: Vessels up to 32 ft. draft.
Blaye: Vessels up to 25 ft. draft.

RESTRICTIONS: The great entrance to the Gironde estuary (Western Entrance) is dredged to a depth of 13.50 m. under the zero of French sea charts. It permits the sailing in of ships with a draft of 15 m. (49 ft.) at practically all tides.

HEALTH: Vessel should ask for free pratique by radio at least 12 hours before arriving at port. Message should be addressed to Sanipor – Bordeaux routed via Bordeaux/Arcachonradio. Otherwise, pratique given by Customs Officers who board on arrival. If any case of suspected disease on board or any reason why vessel should not receive free pratique, Master should radio Agent before arrival, advising full details.

RADAR/VHF: Port radar is in operation in the Gironde Estuary and approaches. Vessels may contact this station for navigation information by calling Verdon Port Radio on VHF Channel 14.

RADIO: Arcachon Bordeaux Port Radio: Radiotelephony 1,862 kc/s. Radiotelegraphy 421 kc/s.

Port Authority by VHF: Calling band 156.8 mHz Channel 16. Traffic band 156.6 mHz Channel 12 (port). Traffic band 156.7 mHz Channel 14 (radar).

Pilots: Telegraphy: watch on 500 kc/s at the prescribed hours. Telephony: continuous watch on 2,182 kc/s. VHF: continuous watch on Channel 6.

TUGS: Tug assistance is available as ordered by the Pilot. Tugs will join vessels at the following places: In Verdon Roads for vessels mooring at Verdon. In Pauillac Roads for vessels mooring at Pauillac. At Buoy BA1 for vessels mooring at Ambes. Off the Harbour Basins for vessels mooring at Bordeaux Docks.

As a rule ship's tow-lines are used; when a tug line is required there will be an additional charge.

BERTHING: *Le Verdon Deep Water Terminal:* 2 containership berths depth alongside 13 m. at low water; slip for quarter ramp Ro/Ros. Floating Bridge berth for angle ramp vessels and combination. Ro/Ro/Lo-Lo vessels. (Handling operations carried out 24 hours a day 7 days a week). 100 power points for reefer containers. Two container gantry cranes of 36 tons and 44 tons hoisting capacity. Two 24 ton cranes.

Riverside Quays. 20 berths depth alongside 7.50 m.–9 m. at low water.

Enclosed Docks. 2 basins joined by a lock 25 m. wide. Entrance effected by two locks of the following dimensions: Large lock 146 m. long 22 m. wide. Small lock 100 m. long 14 m. wide. Depth of water in the basins is maintained at 7.50 m.

Queyries. 493 m. long, depths offered are 7–8 m. alongside.

Bassens-Amont. 770 m. long, depth alongside at LW. 11.0 m. (5 berths).

Bassens-Aval. 11 berths, total length 1,475 m. Depth alongside more than 9.50 m. at low water.

Blaye: Private berth for coasters. Public berth 8 m. draft, 170 m. long. Also private berth for tankers.

Pauillac: Public berth for vessels drawing up to 10 m. Total quay length 290 m.

TANKERS: *Verdon Terminal:* Main berth. The ship is berthed on elastic dolphins (steel pipes) with an available depth of 17 m. Ship makes fast with own hawsers on four mooring dolphins, two up and two down on the wharf and set back about 35 m. from the face. This mooring is strengthened by very flexible steel warp hawsers of 55 and 60 mm. diam. Five hawsers of this type may be placed at each end of vessel according to needs and weather conditions. Ships must have strong chain or claw-stoppers for turning on bitts.

For crude oil, the berths have following equipment: one 30 in. line connecting the main berth to storage; one 16 in. line connecting the coaster berth to the foresaid lines; 2 lines for bunkering.

Arms for connecting pipe-lines to ship. Connecting of the crude oil pipe-lines is made by ASA type, 16 in. Mannesmann arms (4 at main berth – 1 at the coaster berth). The Port Authority has a number of connecting collars in various dimensions and types. Ships are requested to inform before arrival on the type and data of their own collars. Connecting to the bunkering line is made by flexible hoses (ships must use their own handling gear).

Fire wire must be rigged on forecastle and poop, the eye 1 metre (3 ft.) above the water (all the time) when ship is light. Each fire wire must have a 10 m. (30 ft.) coil laying between bitts and fair lead.

If no other request, the ship is assisted by 2 tugs (with Kortnozzle 23 ton thrust) one of which stays at disposal during the call.

Secondary berth. This berth is for the use of shuttle-service ships, lighters and coasters, depth of 6.50 m. alongside.

Fire-fighting line. A 12 in. line supplies the wharf and the 2 berths with sea water under pressure. At each berth there are fire-fighting hydrants. The first help material for fire-fighting is ready to use at each call. It includes spray nozzles, water and foam hoses, emulsion liquid containers, powder extinguisher systems (movable and portable).

Bunkering. Supply is made by lighters mooring at the coaster berth. Tying lighters alongside tankers is forbidden, except with special permission of the Port Authority.

Telephone. Telephone is connected to every ship on arrival. In that way the ship is regularly connected to the French telephone network (tel. No. 596243 – Le Verdon).

Pauillac: Oil installation operated by Shell, 33 ft. alongside.

Ambes: Terminal for tankers up to 200 m. length, 32 ft. 6 in. draft. Operated by Societe Elf and Esso.

Blaye: Small tankers are accommodated at the private jetty of La Societe Total.

DENSITY: Verdon 1023 to 1015. Pauillac 1026 to 1000. Ambes approximately 1000. Bordeaux approximately 1000.

MEDICAL: All facilities available. Smallpox, malaria, and cholera vaccinations can be performed at the Military Hospital or at the Port Vaccination Centre.

CONSULS: Algeria 52.66.80, Brazil 52.83.57, Cambodia 44.27.41, Canada 52.36.89, Colombia 44.78.37, Denmark 29.24.10, Finland 29.35.88, Germany 08.60.20, Great Britain 52.28.35, Greece 29.43.13, Guatemala 08.22.49, Haiti 92.56.14, Honduras 92.93.01, Iceland 50.84.68, Italy 52.24.89, Ivory Coast 44.12.42, Dominican Republic 08.43.63, Liberia 29.22.10, Madagascar 52.13.92, Monaco 29.26.12, Morocco 29.57.95, Norway 52.52.41, Panama 91.46.92, Netherlands 29.16.75, Peru 08.25.35, Philippines 48.35.01, Portugal 52.10.50, Spain 52.80.20, Sweden 29.37.10, Switzerland 52.18.65, Tunisia 44.99.20, Venezuela 47.19.67, United States of America 52.65.95.

DRY DOCKS: There are 3 dry docks and 5 small covered docks. Dimensions of the largest graving dock are 247 m. length 34 m. width 13.40 m. depth.

CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle of alcohol per man.

IDENTIFICATION CARDS: Crew men going ashore should carry passport or identity card.

AIRPORT: Situated 10 km. from Bordeaux. Frequent and Daily flights to most parts of Europe and North Africa. Good internal service.

POLICE/FIRE/AMBULANCE: Police 17; Ambulance 17; Fire 18.

TELEPHONES: Can be connected on board vessels moored at quays in Bordeaux, Bassens, Ambes, Pauillac, and Verdon.

TIME: GMT plus 1 hour in Winter. GMT plus 2 hours in Summer.

HOLIDAYS: New Year (1st January, no labour available); Easter Sunday (possibility of labour with overtime); Easter Monday (no labour available); Labour Day (1st May, no labour available); Ascension Day (possibility of labour with overtime); Whit Sunday (possibility of labour with overtime); Whit Monday (no labour available); National Day (14th July, no labour available); Assumption Day (15th August, no labour available); All Saints' Day (1st November, no labour available); Armistice Day (11th November, possibility of labour with overtime); Christmas Day (25th December, no labour available). N.B. Every Sunday and day marked "possibility of labour with overtime" can be worked at the rate of 100%.

Le Verdon Container Terminal: Operational 24 hours per day, 365 days per year.

AUTHORITY: Port Autonome de Bordeaux.

AGENT: See "Paris".

BOULOGNE SUR MER: 50.43 N. 01.35 E. (See Plan Book)

DOCUMENTS: As for "Calais".

PILOTAGE: Compulsory for vessels over 60 m. length. Vessels can communicate with Pilot station, tel. 31.36.08, through Boulogne Radio. When pilot launch is at sea, contact by VHF Channel 12.

The most favourable boarding point is between the sea buoy and the wreck buoy situated 1.5 miles to the South, or slightly nearer the land if there are strong Westerly winds. In any event, the surf created by the Carnot breakwater must be avoided by keeping at least 1 mile off shore. If Pilot is not immediately available, vessel must wait in Outer Roads, if necessary at anchor, until further instructions received. On no account should vessel attempt to enter Carnot Roads without Pilot.

ANCHORAGE: The outer anchorage for large vessels is midway between Bassure de Baas and the Carnot breakwater. Anchorage prohibited in the main approach channel.

RESTRICTIONS: Entrance depends on tidal conditions. For larger vessels best to enter the breakwaters at slack water which occurs 2 hours before time of high tide. Arriving vessels are obliged to contact Harbour Master's office immediately by radio, or VHF Channel 12.

MAX. SIZE: For outer harbour: length, 240 m.; draft, 10.5 m. springs 11.00 m. neaps. Max. d.w.t., 35,000 (approx.). Bassin Loubet: length, 130 m.; draft, 7.5 m. springs, 7.75 m. neaps.

RADIO: Boulogne Radio, call sign FFB, also on VHF Channel 25.

HEALTH: Pratique given by Customs officers who board on arrival. In case of suspected disease on board, Master should radio Agents prior arrival advising details.

TUGS: Will meet vessel as requested by Master on Pilot's advice.

BERTHING: Main berths situated inside Carnot breakwater. Mooring length of 775 m. available, depth 11 m.

A marine terminal in the inner harbour, for landing vehicles with passengers. This terminal has 2 mobile ship-to-shore ramps.

These ramps have a load capacity of 30 and 35 ton, and the availability of parking areas allows for development of roll-on/roll-off traffic. However, the characteristics of the inner port can just accommodate ships up to a max. length of 130 m. with a draft of 4.50 m. Plans are being studied for considerably improving these facilities.

CRANES: Floating cranes: 1×150 tons and 1×25 tons, 9 cranes 3–5 ton and 23 cranes 6–20 ton.

DEVELOPMENTS: A third ramp, being a car ferry terminal and for which the constructional works have been completed is located in the sheltered road on the West face of the Sarraz-Bournet dock mole.

The installation of a fourth ramp, for Roll-on/Roll-off, the location of which is close to that mentioned above is currently under construction.

The open land area available for these 2 ramps is approximately 100,000 sq.m.

The Hoverport, in order to be better adapted to the needs of the new hovercraft has been the subject of enlargement works.

A 400 m. quay could also be built along the West face of the mole when the increase in trafffic necessitates its building.

The port offers 93,010 sq.m. of sheds of which 7,900 sq.m. (i.e. 38,000 cu.m.) are quayside cold stores together with a wine vault with a capacity of 52,000 hectalitres. The open air areas now cover 83,590 sq.m.

Having a capacity of 42,500 tons, the clinker silo has a loading rate of 1,000 t.p.h.

FRESH WATER: Supplied by pipe-line to all berths.

FUEL: SMCL quay can supply marine fuel. Quay is limited to vessels less than 100 m. length and 5 m. draft, otherwise fuel obtainable by tanker lorry from Dunkirk.

OPENING/CLOSING HATCHES: Performed by crew.

REPAIRS: Only quick repairs may be effected because of congestion at the quays. Slipway for vessels up to 2,500 tons.

TIME: GMT plus 1 or 2 hour according to the time of the year.

HOLIDAYS: No work Sundays and legal holidays.

POLICE/AMBULANCE/FIRE: Police, tel. 30.12.34; Ambulance/Fire, tel. 18.

TELEPHONES: Can be connected on board vessels at Quay de L'Europe.

SHORE LEAVE: Permitted, no restrictions.

AUTHORITY: Direction du Port.

AGENT: See "Paris".

BREST: 48.24 N. 04.30 W. (See Plan Book)

DOCUMENTS: See "Dunkirk".

PILOTAGE: Pilots do not stay out at sea, but only go to meet ship at estimated time of arrival as sent by ship. Normally pilot boat positioned on the line Toulinguet lighthouse and Beuzec (or Charles Martel) buoy, about 2.5 miles N.W. Toulinguet lighthouse. If strong S.W. wind, pilot boat waits for ship at entrance of Camaret Bay, about 1.5 miles N.E. Toulinguet lighthouse. If sea too rough to allow pilot boat to sail out, boat waits for ship at entrance of Brest Roads, near Portzic lighthouse.

Ships proceeding Brest must send last message giving ETA Pilot station (stating if *local time or GMT*), about 5 hours before arrival. Message to be addressed *"Brest Pilot Office"* through Brest Le Conquet radio station (call sign FFU). Day and night watch at pilot office. Radio station phones message direct as soon as received. Any alteration in ETA should be passed pilot office immediately.

Pilot boat sails from Brest harbour about 1.5 hours before ship's ETA, and 0.5 hour later pilot boat takes radiotelephony watch on 2182 kc/s, calling ship from time to time on same frequency. Ships fitted with radiotelephony should listen and call on 2182 kc/s. Pilot boat also equipped VHF Channels 16, 9, 6, 12 and Pilot office Channel 9.

ANCHORAGE: At Pilot's discretion. Anchoring in main approaches restricted as indicated on charts.

RESTRICTIONS: Entry subject draft and height of tide on day in question. Two entrances to port, one dredged to 6 m. below zero of charts and the other 5.8 m. below zero. Depth at quays varies according berth from 6 m. to 11 m. below zero.

MAX. SIZE: Inside harbour, max. length 320 m. Draft up to 35 ft. subject to tide.

HEALTH: If from foreign port, cable Maritime Health Service 48 or 24 hours prior arrival requesting free pratique. If risk of contagious disease exists, vessel will be held in roads until cleared. If from another French port, free pratique automatic.

RADIO: Brest Le Conquet – FFU.

TUGS: Two port tugs of 1,250 h.p. Tugs join vessel at main entrance to port. Marine National places tugs at ship's disposal for all port movements. Generally, tow rope supplied by tug at additional charge.

The German salvage tug *Le Pacific*, or another tug of the German Bugsier Company, is stationed at the port, but only gives assistance for vessels requiring aid outside the port area.

BERTHING: According to draft, ships may have to wait in roads before berthing, depending on height of tide in fairways. Also see "Restrictions".

Commercial Harbour Facilities:

Dock	*Quay*	*Specialisation*	*Length*	*Sea level Chart*	*Lifting Power Equipment*
1	West	Wine, Wood, Railway, Others	170 m. 560 ft.	–8 to –7 m. –26 to –23 ft.	Mobile cranes 4 t at 22 m.
2	West	Wood, Railway Others	110 m. 360 ft.	–5 m. –16 ft.	Mobile cranes 4 t at 22 m.
3	Southwharf	Frigorific shelters, Others	140 m. 460 ft.	–6 m. –20 ft.	Mobile cranes 4 t at 22 m.
5	West	Frigorific shelters, Railway, Others	170 m. 560 ft.	–8 m. –26 ft.	2 cranes 3/6 t at 22 m.
5	North	Frigorific shelters, Railways, Others.	340 m. 1,120 ft.	–7.5 m. –25 ft.	
5	East	Cereals, Wood, Railway, Others.	300 m. 980 ft.	–10 to –8 m. –30 to –26 ft.	2 pneumatic suckers 2 × 100t/h 2 cranes 8 t at 30 m. (12 t at 20 m.) 1 crane 6 t at 22 m. 1 crane 12 t at 22 m.
6	West	Petrol	150 m. 490 ft.	–10 m. –30 ft.	Mobile cranes 4 t at 22 m.
6	East	Cereals, Coal, Others.	240 m. 790 ft.	–10 m. –30 ft.	2 cranes 8 t at 30 m. (12 t/20 m.) 1 gantry crane 900 t/h for bulk
6		Coal, Cement	120 m. 390 ft.	–6 m. –20 ft.	1 loading stoker 900 t/h.
6	South (1)	Containers, Cereals, Wood, Railway,	230 m. 765 ft.	–12 m. –40 ft.	1 crane 28 t at 33 m. (40 t at 24 m) 1 crane 8 t at 30 m. (12 t at 20 m.)

(1) This quay will be operational in February 1979.

STEVEDORES: Agent has responsibility of making all arrangements for unloading, and is in touch with stevedores who arrange necessary gangs.

MEDICAL: Hospitals and clinics available. In the case of ship needing medical assistance, request should be addressed to Maritime Health Service through Conquet Radio Station, advising ETA, where vessel coming from and state of patient.

TANKERS: One berth for receipt of refined products destined for local storage tanks. Berth length 142 m., dredged alongside to a depth of 10 m. below zero of charts over an area 250 m. long and 30 m. wide.

FRESH WATER: All berths have fresh water supply. Apply to Chamber of Commerce who make necessary arrangements. Loading rate 13-15 t.p.h.

FUEL: Bunkering station operated by Societe de Depots de Petrole Cotiers, on the South side of the East Mole. Loading rate up to 200 t.p.h.

TANK CLEANING: Station situated at the Southern extremity of the East Mole. Can operate 4 Victor Pyrate machines simultaneously. Equipped with 3 boilers to supply steam, 3 pumps, oily water separator and an extractor for solid residues.

The tank-cleaning station is connected by pipe-line to Repair Quay No. 2 where tankers of 100,000 to 250,000 d.w.t. may be accommodated.

DEVELOPMENTS: Two large projects are currently under construction:

The first consists of a new port industrial zone with an area of 100 hectares, and frontage of approx. 1,800 m. which will enable the construction of quays with depths of 10 – 12 m.

The second consists of the construction of a large dry dock able to receive vessels of 550,000 d.w.t. and 2 floating repair quays. The dry dock will have a length of 420 m. and width of 80 m. The quays will have a length of 418 m. each and will be dredged to 11 – 12 m.

These new developments will be put into service in 1979/1980, and will be equipped with the most modern means to repair large vessels.

Furthermore, the Port is studying a vast plan to develop the commercial port, so that the latter may adapt itself to the requirements of modern maritime transport.

WATCHMEN: Compulsory for ships carrying dangerous materials, non gas-free tankers, vessels with chemical products, munitions, etc.

CERTIFICATES:
Nationality.
Gross Tonnage.
Classification.
Deratisation.
Vaccination.

CUSTOMS ALLOWANCES: Tobacco, Wine/Spirit. Ship's provisions must be under seal.

CONSULS: The following countries are represented by Consuls at Brest:

Belgium
Chile
Denmark
Finland
German (Federal Republic)
Netherlands
Norway
Portugal
Spain
Sweden.

REPAIRS: Repair Quay No. 1 at the East Quay of Basin No. 5 can accommodate vessels up to 200 m. length. Dredged to depth of 10 m. over an area 300 m. long, 52 m. wide.

Repair Quay No. 2 can accommodate vessels up to 350,000 d.w.t. Quay is 320 m. long, dredged to depth from 10 m. at the bow to 12 m. at the stern.

Repair Quay No. 3 Adjacent to Repair Quay No. 2 Length 280 m. Depth 12 m.

Quays No. 2 and 3 are equipped with modern and complete plant necessary for tanker repairs.

Vessels may also be permitted to make repairs at other quays according to their availability.

DRY DOCKS: *No. 1:* Dimensions 225 m. by 26.77 m., entrance sill 4 m. below datum, situated at the Northeast angle of Basin No. 5. The entrance lock can receive 2 vessels simultaneously, 1 of 75 m. length and the other of 150 m. length, with some adjustments.

Max. draft, at Spring tides: 11.50 m.; at neap tides: 10 m.

No. 2: Dimensions 342 m. by 55 m. Can accept tankers of up to 250,000 d.w.t. Entrance sill 7.25 m. below datum. Dock situated in the Southeast of the Industrial Port Zone. Can accept vessels of the following dimensions.

At mean Spring tides: length 335 m.; beam 50 m.; draft 12.50 m.
At neap tides: length 335 m.; beam 50 m.; draft 10 m.
Also see "Developments".

AIRPORT: At Guipavas, 7 km. from Brest – 3 daily services to Paris.

TIME: Local time GMT plus 1 hour.

POLICE/AMBULANCE/FIRE: Police 444850 and 445861; Police Secours 17; Ambulance and Fire Brigade 18 or 442766.

TELEPHONES: Can be placed aboard at certain berths.

SERVICES: Degassing station, tank-cleaning and slop discharge, adjustment of chronometers, chart and document department, weather forecasting, permanent daytime service for signing on crew, barometer adjustment. Also Compass and D/F adjusting.

Port Weather Service: Port Office, 30 Bis, Quai Commandant Malbert. Health Service: Quai Commandant Malbert.

AUTHORITY: Arrondissement de Brest, Direction Departmentale de l'Equipement.

AGENT: Jolasry (France), 6 Quai de la Douane. Telex 73080. Tel. 44.32.10

CAEN: 49.13 N. 00.21 W. (See Plan Book)

DOCUMENTS:
3 copies Crew List.
3 copies Provisions List.
3 copies Crew Personal Effects List.
Derat. Certificate or exemption.

PILOTAGE: Pilot boat is on station from 2.5 hours before high water until 3 hours after high water. Vessels can contact the Pilot by radio on 2182 kHz or by VHF Channels 12 and 16. The pilot boat is stationed in the outer port of Ouistreham and goes out to the roads on vessels approach. International code flag signals are used to call Pilot.

Caen Pilot boat has a black hull with white stripe. The words "Pilote Caen" are written in white letters on the hull. During the Summer months the pilot boat is replaced by a launch bearing the same markings. As soon as the Pilot boards he will hand the Master an Entry Declaration to be completed.

ANCHORAGE: While waiting the tide vessels may anchor in the vicinity of the light-buoy in Ouistreham roads. The position of this buoy is 49° 19′ 50″ N. 00° 14′ 18″ W. The buoy is positioned in depth of 10 m. Anchorage is open to winds from West through South to East; good holding ground. Currents do not exceed 2 knots at spring tides.

RESTRICTIONS: Dimensions of locks – East lock length 181 m., width 18 m. West lock length 225 m., width 28.45 m.

The locks are open to navigation from 2 hours before high water to 3 hours after high water. The locks can be used up to a maximum of 1 hour before/after these times by special permission of the Harbour Master and payment of additional dues.

Maritime Canal, length 14 km. The canal is dredged to 9.89 m. depth. Vessels proceeding to the docks at Herouville and Calix must pass 2 bridges: Herouville 30 m. wide and Colombelles 30 m. wide.

Ships proceeding to new dock must also pass the bridge at Calix, 21.76 m. wide. Maximum speed authorised in the Maritime Canal is 7 knots.

Maximum air draft for New Dock and St. Pierre Dock, 33 m.

MAX. SIZE: Daytime, length 205 m., beam 23 m., draft 28.8 ft. sea water.

Night-time:

Herouville	length 170 m.	Beam 17 m.	Draft 24 ft. SW.
Calix	length 150 m.	Beam 17 m.	Draft 24 ft. SW.
New Dock	length 140 m.	Beam 15.3 m.	Draft 21 ft. 2 in. SW.

HEALTH: Free pratique is automatic for all ships. Health control is carried out by customs officers under the direction of the Havre Port Health Office. For ships coming from ports in Africa, Asia, or Pacific Islands a Maritime Declaration of Health is required.

In case of suspected epidemic or fever on board Master must advise the port authorities who will instruct him to proceed to an appropriate anchorage to be boarded by the Port Health doctor.

RADIO: Nearest radio station Boulogne Radio, call sign FFB.

VHF: Vessels may communicate with the Harbour Master's Office by VHF Channel 12. This service only operates during the hours when the locks are operating.

TUGS: The use of 1 or 2 tugs is recommended for vessels over 16.50 m. beam.

BERTHING:

Dock	*Quay*	*Facilities*	*Length (m)*	*Sea level chart*
Saint Pierre	Vendeuvre de	1 crane 5 tons	280	4.5
	la Londe	1 apple silo of 250 t	250	4.3
	Cafarelli	unloading rate 50 t.p.h.		
		Cider storage of 3,200 hectl capacity	150	4.5
Nouveau Bassin	President	3 cranes 5 t	150	7.9
	Hippolyte	Cereals machinery rate:	550	6.5
	Lefevre	two 100 t.p.h.		
	President	one 200 t.p.h.		
	Gaston Lamy	4 cranes 3 t; 2 cranes 5 t		
		2 cranes 10 t; 2 cranes 15 t		
	De Normandie	3 cranes 5 t; 1 crane 8 t		
		1 crane 10 t	375	5.8
De Calix	Calix	4 cranes 6 t	180	9.9
		Storage of Molasses: 13,500 t		
		Roll-on/Roll-off Berth	180	7.6
D'Herouville	President	2 cranes 5 t; 4 cranes 6 t	370	9.9
	Delaunay	Private berth, 3 cranes 8 t	200	
	Mole a charbon	for General cargo: 9 silos of 19,600 cu.m.		
Blainville	Blainville	Cereals machinery rate 400 t.p.h.	150	9.9
	Blainville	3 cranes 20 tons	180	9.9

STEVEDORES: Arranged by Agent on basis of ETA provided by vessel before arrival.
MEDICAL: Doctors and hospital facilities available.
TANKERS: There is a tanker berth (D.P.C.) in Calix Dock, max. draft 8.60 m. Gas-freeing and discharge of residues is prohibited.
FRESH WATER: Available at all berths, rate about 5–10 t.p.h.
FUEL: Can only be supplied by tanker lorries.
WATCHMEN: Not compulsory during daylight hours from 0600 hrs. to 1800 hrs.
OPENING AND CLOSING HATCHES: This work is normally carried out by the crew.
CUSTOMS ALLOWANCES: Amount of tobacco and alcohol for crew consumption must be declared on the stores list. Quantities held out of bond are at Customs discretion.
IDENTIFICATION CARDS: Not required.
CONSULS: The following countries are represented locally:

Denmark tel. 82.00.67	Norway tel. 82.05.42
Finland tel. 83.33.27	Sweden tel. 82.21.76

REPAIRS: Deck and machinery repairs can be carried out by local workshops. Nearest dry docks at Havre or Cherbourg.
REPATRIATION: Can be arranged.
AIRPORT: Situated 12 km. from the port. There are no regular services, but an air taxi with 5 seats can arrange connections to International airports.
TIME: GMT plus 1 hour or GMT plus 2 hours.
HOLIDAYS: Work is carried out on legal holidays. No work on "Jours de Fetes".
POLICE/FIRE/AMBULANCE: Police tel. 17; Fire 18; Ambulance 18.
TELEPHONES: Can be connected on board ships. Quayside telephone situated in the Calix dock, Herouville and Blainville.
SHORE LEAVE: Allowed.
AUTHORITY: Ingenieur des Ponts et Chaussees, Chef de l'Exploitation, Direction Departmentale de l'Equipment.

AGENT: See "Paris".

CALAIS: 50.58 N. 01.50 E. (See Plan Book)

DOCUMENTS:

Ship Register.
Manifest of Cargo.
Bill of Lading
3 Lists of Provisions on board.
4 Lists of Articles held by Crew.
3 Lists of Crew.
List of open spaces.
Health Certificate, endorsed by Master on arrival.
Deratisation or Exemption.
For tankers, Certificate of Cargo Specification and Certificate of vessel's suitability to transport inflammable liquids in bulk.

PILOTAGE: Compulsory when entering or leaving harbour, except for ships less than 50 m. length. Pilotage area: 3 miles from piers. Ships required to give notice of their arrival 18 hours before, through Boulogne Radio. Pilot waits between buoys CA4 and CA6. Pilot boat: Black, white side stripe, bearing the inscription "Pilote Calais". She is equipped with VHF, Channel 6 and Channel 16.
ANCHORAGES: Between CA6 and CA8, 15 to 17 m. deep, sand and gravel. Good anchorage. When bad weather from North, ships are advised to stand out to sea or anchor in the roads of Les Dunes. Ship will receive instructions from Pilots or Harbour Captain's office when to enter roads of Calais.
RESTRICTIONS: Harbour channel 130 m. wide. In channel and outer harbour, depths are maintained at 8.40 m. MWL. Vessels should enter harbour preferably about 2.5 hours before high tide or half an hour after high tide. Because of the shape of sluice at the entrance larger vessels cannot have direct access to the Bassin Carnot at certain tides. These vessels may lighten in outer port, at "Quai Paul Devot", where depth is 9 m. LWOST.
MAX. SIZE: "Bassin Carnot", 150 m. max. length; "Bassin Ouest", (West Dock) 110 m. max. length; "Quai P. Devot" 175 m. max. length; "Bassin Carnot", 19 m. max. beam; "Bassin Ouest", 16 m. max. beam. Max. draft: 8.23 m. (27 ft.). Port accessible to vessels of 20,000 d.w.t.
HEALTH: Sanitation controls can arrange deratisations and exemptions. International Vaccination Certificates required for ships coming from an epidemic zone.
RADIO: Messages through Boulogne Radio. ETA must reach pilotage station or Harbour Captain's offices 18 hours before arrival. Near Calais, ships equipped with VHF can call Harbour Captain on Channel 12 or pilotage station on Channel 16.
TUGS: Generally join ships at end of the piers. Towing ropes are generally ships own but can be supplied by tug.
BERTHING: Max. height of tide 7.30 m. Depth on dock sills 2 m. LWOST.

At West dock, entrance between 1.5 hours before and half an hour after high tide. In Bassin Carnot, entrance between 3 hours before and 1 hour after high tide.

There are 2 berths equipped for handling roll-on/roll-off traffic, situated in Bassin Carnot.

CRANES:

Maritime Station Quay	Electric cranes – 6 tons	3
Paul Devot Quay	Electric crane – 6 tons with automatic scoop	1
	Electric crane – 12 tons with automatic scoop	1
	Electric cranes – 15 tons with automatic scoop	2
Transit Station	A block of 2 gantries able to handle a load of 40 tons (containers)	
West Basin		
South Quay of the	Electric cranes – 3 tons	3
West Basin	Electric cranes – 6 tons	2
Carnot Basin		
Vistule Quay	Electric cranes – 6 tons	2
Loire Quay	Electric cranes – 6 tons	3
	Electric cranes – 6 tons with automatic scoops	8
	Electric cranes – 12 tons with automatic scoop	2
	Electric gantries – 6 tons with raisable forepeak and equipped with weights and automatic scoops	2
Crespin Quay	Electric cranes – 6 tons with automatic scoops	3
Fournier Quay	Electric cranes – 6 tons	5
	Electric crane – 12 tons with automatic scoop	1
Volga Quay	Electric cranes – 6 tons	2
	Electric cranes – 6 tons with automatic scoops	2

Dry Dock: One electric crane – 15 tons. 2 mobile cranes of 1/9 tons complete the lifting machinery of the Public Equipment of the Port.
BRIDGES: Swing bridges (West Dock) and draw bridges (Bassin Carnot) are situated on sluices.
STEVEDORES: Informed by Shipbrokers of tonnage, nature and condition of cargo.
MEDICAL: All facilities available.
TANKERS: Two posts provided for tankers: "Quai Paul Devot" for middle-sized tankers. "Bassin Ouest" (West Dock) for small tankers. "White and black" products can be accepted at "Bassin Ouest". Only "black" products admitted at "Quai P. Devot". Tankers are allowed to enter harbour only by daytime. They must leave as soon as operations are finished. Hoses 10 in. and 12 in. in diameter. Barges discharged with a 10 in. hose.
DENSITY: Salt.
FRESH WATER: Supplied from hydrants on wharves.
FUEL: Any fuel can be supplied by tank lorry of large capacity.
GANGWAY/DECK WATCHMEN: Ships must be guarded.
OPENING/CLOSING HATCHES: As a rule hatches are manoeuvred by crew.
CUSTOMS ALLOWANCES: Tobacco: No limit for foreign ships, but the quantity must be declared on the lists of articles held by crew.
IDENTIFICATION CARDS: Identification cards and seamen's books are required.
CONSULS:

Consuls:
Netherlands, M. G. Dumont, 12 Bd. des Allies, Calais.
Vice-Consuls:
Denmark, M. J. Mulard Jr., Place de Suede.
Finland, M. H. Ravisse, 12 Bd. des Allies.
Great Britain, E. J. Evans, 9 Rue Felix Cadras.
Greece; M. H. Ravisse, 12 Bd. des Allies.
Norway, M. Y. Lefebvre, 12 Bd. des Allies.
Sweden, M. T. Pagviez, 198 Rue des Quatre Coins.

REPAIRS: Deck and engine repairs possible.
DRY DOCKS: One, 153 m. long, 21 m. wide. Depth at sill, 7.45 m.
REPATRIATION: Pilot boats and tugs may trans-ship equipment or hands in outer roads.
AIRPORT: Calais, Dunkirk (International), 7 km. away.
TIME: GMT plus 1 hour. Spring and Summer GMT plus 2 hours.
HOLIDAYS: 1st January; Easter Monday; 1st May; Ascension Day;

Whit Monday; Tuesday afternoon following 1st Sunday of July (local feast); 14th July; 15th August; 1st November; 11th November; afternoon of 24th December; 25th December; Sundays.
POLICE/AMBULANCE/FIRE: Police 17; Ambulance 34.39.24; Fire 18.
SHORE LEAVE: Crew are allowed ashore.
AUTHORITY: Directeur des Ports de Boulogne-sur-Mer et Calais.
AGENT: See "Paris"

CALVI: Corsica 42.34 N. 08.46 E.

DOCUMENTS:
3 Crew Lists.
3 Passenger Lists.
1 Provisions List
1 Cargo List.
1 List of Articles (new and customs-barred) in possession each Crew member – cameras, binoculars, radios, cigarettes, spirits, etc.
1 Health Declaration.
PILOTAGE: Not compulsory.
ANCHORAGE: Outside port for cruise vessels.
MAX. SIZE: Draft 5 m.; length 160 m.
RADIO: Within 50 miles call Ajaccio Radio VHF Channel 16. Then connected over Channel 23 to telephone network.
TUGS: None available.
STEVEDORES: 24 hours accurate ETA necessary for ordering gangs. No work on Sundays and official holidays.
CARGO GEAR: Only a few nets and slings available; all other gear must be supplied by ship. Ship's derricks used.
FRESH WATER: Available at very slow pumping rate.
FUEL: Not available.
REPAIRS/CONSULS: None.
TIME: GMT plus 1 hour.

CANNES: 43.33 N. 07.01 E.

DOCUMENTS:
To be sent on departure from previous port.
3 copies of Passenger List.
1 copy of Crew List.
Required on arrival:
4 copies of List of Passengers, showing Christian name, surname, age, date and place of birth, nationality.
2 Crew Lists.
5 copies of a Special Arrival form (supplied on arrival).
PILOTAGE: No Pilot station at Cannes. A tender with Company's flag on top of its mast will meet the vessel: *(a)* If ship is proceeding to anchorage No. 1, in Golfe de la Napoule, about half a mile South of the lighthouse at end of Cannes port Pier (Quai Lauboeuf); *(b)* If ship is proceeding to either anchorage No. 2 or 3, in Golfe-Juan, half a mile North of Ile Ste Marguerite.

The tender will lead to anchorage and will give 1 blast of the siren when correct position has been reached. At night, tender has a fixed white light at top of its mast, which replaces the flag. Should it not be possible to advise by wireless before arrival at anchorage and weather conditions making it necessary for ship to anchor at either position No. 2 or 3, boat will meet ship in Golfe de la Napoule, 2 miles South of Cannes port lighthouse. In this event, ship must proceed to anchorage No. 2 or 3 as appropriate, steaming to South of Ile St. Honorat, whilst tender will proceed by channel between Ile Ste Marguerite and the mainland.
ANCHORAGE: Advice of anchorage is passed to Captain via Grasse Radio or Monaco Radio, VHF Channel 16 usually about 1 hour before arrival. There are 3 anchorages, any of which may be used according to the weather:

No. 1 off the port of Cannes, approximately half a mile South of end of breakwater, used by calm sea or by East or N.E. winds.

No. 2 is situated to North of Ile Ste Marguerite, used by S.E. or S.W. or South winds.

No. 3 to the East of Cap de la Croisette, used by West or N.W. winds.

It could happen during the call, winds may change direction and movement from anchorage No. 1 to No. 2 or No. 3 become necessary. Shift takes about 1 hour.
HEALTH: Port officials will embark immediately the ship anchors. Free pratique may be granted by wireless telephone 1 hour before arrival at ship's surgeon request stating: "no illness on board".
FRESH WATER: 3 tankers of respectively 65, 75, and 95 tons capacity are available with 72 hours' notice. Water can be pumped at an average of 1,500 tons per 24 hours, with 2 hoses of 2.5 in. diameter on each tender.
GANGWAY/DECK WATCHMEN: Watchmen for gangways should be provided by ship and passengers are requested to present their landing cards every time they use the gangways.

CHERBOURG: 49.38 N. 01.38 W. (See Plan Book)

DOCUMENTS:
Declaration of Health.
Manifest of Provisions on Board.
Manifest of Crew's Possessions.
Manifest of Cargo – in certain cases.
Manifest of Equipment.
DEEP SEA PILOTAGE: Pilots board off CH1. Buoy. Radio ETA to "HUTCHINSON GRAVESEND". (48 hours notice.) On approaching Cherbourg contact Cherbourg Signal Station on VHF Channel 16 confirming ETA.
PILOTAGE: Requests for pilotage must indicate arrival time at the buoy CH1. They may be addressed to Agent or direct to pilot station, telegraphic address "Pilotage Cherbourg" or through the Homet look-out station by means of the usual signals. To avoid delay it is well to warn the pilot station 4 hours in advance of arrival. As a general rule, the pilot boat always comes out, whatever the weather. In bad weather, it follows the vessel and Pilot boards as soon as shelter permits.
ANCHORAGE: Anchoring must be made strictly according to the instruments of the Pilot so as not to get in the way of movements and anchorage of steamers. Depths vary from 6 to 12 m. in safe anchorages.
RESTRICTIONS: In the wet dock, the bridge is opened one hour before until one hour after high water.
MAX. SIZE:

	Length (m.)	Breadth (m.)	Depth (m.) average tide Spring	Neap
In the Roads	No Limit	No Limit	11	12.50
Trans-Atlantic Dock	No Limit	No Limit	7.0–12.5	8.5–14.0
Mielles Dock	150		5.00	6.50
Oil berth at Querqueville	200	31	9.0	10.50
Berth Amiot	100		3.0	4.50
RO/RO No. 1	130	20	7.0	8.50
RO/RO No. 2	200	30	8.0	9.50

HEALTH: From French port to French port, no formalities. From foreign port to French port, request for free pratique (yellow flag). In case of sickness on board, warn the Agent in advance. No crew member may leave ship before consultation and agreement of Port Doctor.
RADIO: The stations which offer the best facilities are Boulogne Radio, Brest le Conquet Radio, and St. Lys for ships which are a long way off.
TUGS: Tugs generally join vessel in the main approaches. With regard to the tow rope, a charge is made.
BRIDGES: Only the swing bridge at the entrance to the wet dock, which is opened on request from 1 hr. before until 1 hr. after high tide for the entry and exit of ships.
STEVEDORES: Agent needs ETA, to arrange personnel and equipment to be used for handling cargo.
CRANES: 2 floating cranes, max. capacity 90 tons. 1 shore crane, max. capacity 25 tons. The French Navy have 2 floating cranes, 1 of 30 tons and 1 of 90 tons capacity.
MEDICAL: Warn Agent of any requirements at the same time as ETA. There are 2 hospitals, civil and military, both very well equipped.
TANKERS: There is only one discharge berth, max. draft 9 m.
WATER: Water points on all quays.
FUEL: Available from local suppliers – Esso, Shell, etc.
WATCHMEN: Every ship in port must have a watchman, usually a crew member.
OPENING/CLOSING HATCHES: At the discretion of Master, crew may perform this.
CUSTOMS ALLOWANCES: Free allowance for each crew member – 200 cigarettes or 50 cigars, and 1 litre of alcohol. Common Market Countries – Crew: 300 cigarettes, 75 cigars and 1.5 litres of alcohol.
IDENTIFICATION CARDS: Each crew member must carry his seaman's card.
CONSULS:

Belgium	Finland and Norway	Greece
Portugal	Haiti	Sweden
Denmark	Venezuela	Great Britain

REPAIRS: All types of hull and engine repairs are possible.
DRY DOCK: Commercial Port's dock: length 75 m., width 14 m.

Dry Dock Nos.	Sill Length (m.)	Max. dim. of vessel able to enter Length (m.)	Breadth (m.)
N. Drydocks			
1	90.00	97.85	18.50
2	100.00	107.85	18.50
3	100.00	107.85	18.50
4	90.00	97.85	18.50
S. Drydocks			
5	200.00	206.40	25.70
6	180.00	184.00	22.15
7	69.30	75.75	17.30
Homet	235.00	248.00	35.00

REPATRIATION: Can be arranged.
AIRPORT: At Moupertuis, 12 kms. from Cherbourg. There are no regular services in the immediate vicinity.
TIME: Local time throughout the year is the time zone 1 hr. East., i.e. Central European Time.

HOLIDAYS: January 1st; Easter Sunday/Monday; May 1st; Ascension; Whitsun Sunday/Monday; July 14th; Assumption; 15th August; November 1st; Victory Day, November 11th; Christmas Day, December 25th.

POLICE/AMBULANCE/FIRE: Police: 53.14.50. Ambulance: 53.13.29. Fire: 53.01.23.

TELEPHONE: Generally, ships do not request the installation of a telephone line, unless for a prolonged stay. It is only possible on the steamer berth, price 15 F.

AUTHORITY: Ingenieur des Ponts et Chaussees, Department de la Manche.

AGENT: Jolasry (France), 9, Quai de l'Entrepot, Cherbourg. Telex: 77723, Telephone: 53.24.35.

CONCARNEAU: 47.52 N. 03.55 W. (See Plan Book)

DOCUMENTS:

Ship's Registration Certificate.
Cargo Manifest.
Stores List.
Crew Personal Effects List.
List of Crew and Passengers with dates of Vaccinations.

MAX. SIZE: *Tankers:* By day: 90 m. overall; by night: 80 m. overall. *Other vessels:* By day: 95 m. overall; by night: 90 m. overall.

RADIO: Contact Conquet Radio.

TUGS: Available on demand, meet vessels near Cochon Light.

CUSTOMS ALLOWANCES: *Tobacco:* Fixed at 30 grams per day, at sea, per person. *Alcohol:* The equivalent of 5 centilitres of rum at 42° per day, at sea, per person.

These allowances are free of tax for use on board, but may not be landed.

IDENTIFICATION CARDS: Any National Identity Documentation will suffice.

POLICE/AMBULANCE/FIRE: Police, tel. 970071; Ambulance, tel. 17; Fire Brigade, tel. 19.

FRESH WATER: Available.

DRY DOCKS: Synchrolift available. Max. capacity 2,000 tons; max. LOA 95 m.; max. keel length 77.5 m.; max. beam 14 m.; max. draft 5.50 m. Fresh water, electricity, compressed air and cranes available.

REPAIRS: There is a slipway which can accommodate 6 vessels of 350 metric tons.

AIRPORT: At Quimper – Pluguffan 30 km. from the town. Twice daily flights to Paris and flights to London during the Summer months.

AUTHORITY: Officier de Port.

DIEPPE: 49.55 N. 01.04 E. (See Plan Book)

DOCUMENTS:

4 Crew Lists.
2 Lists of Stores.
1 Loading Manifest.
1 Passenger List.
1 Declaration (furnished by Agent) stating that ship possesses up-to-date Safety Certificates.
1 Health Declaration.

PILOTAGE: Pilot boards 4 miles from breakwaters. Pilotage is compulsory in this area except for vessels less than 50 m. long equipped with VHF (Channel 12). Pilot boat is ready to put to sea from 2.5 hours before to 1 hour after high tide when a vessel is expected. During this period maintains radio telephone watch. VHF Channel 12.

All vessels must send ETA to the pilotage authority of the Seine/Rouen/Dieppe at least 5 hours prior to arrival in the Dieppe roads, any delay greater than 2 hours or where a tide is missed must be signalled at least 3 hours before the initially ETA. Vessels not obliged to take on a Pilot must indicate in their ETA whether or not a Pilot is needed.

Address: PILSEINE – 21 rue du Mont Diboudet – Rouen, Telephone (35) 71 68 50; Telex 770575.

APPROACHES: Coming from the West, immediate landfall is Cap d'Ailly which is passed at 3 miles distance and then vessels proceed to the landfall buoy of Dieppe marked D.1. with black and white stripes, with a flashing light every 6 seconds and a bell:

Location: 49° 57′ 15″ N., 1° 01′ 40″ E., or 2.5 miles to the N.W. of the port entrance.

The cliffs which surround Dieppe give very good radar echoes.

ANCHORAGE: It is recommended to anchor in zone bounded by following points: *(a)* 49° 56′ 55″ N. 01° 04′ E.; *(b)* 49° 58′ 40″ N. 01° 02′ 45″ E.; *(c)* 49° 57′ 42″ N. 00° 59′ 20″ E.; *(d)* 49° 55′ 50″ N. 01° 00′ 30″ E.

This anchorage area includes buoy D.I and depths are from 6 to 12 m. with sand and broken shell bottom. Larger vessels anchor approximately half a mile to North of buoy D.I in depths of 10 to 12 m.

Forbidden anchorage: It is forbidden to anchor in the area defined by the following points: 49° 56′ 55″ N. 01° 05′ 29″ E. – 49° 56′ 25″ N. 01° 03′ 03″ E. – 49° 56′ 05″ N. 01° 04′ 50″ E.

RESTRICTIONS: The lock gates of the commercial basins are only open from two hours before to one hour after high tide. Vessels remain at anchorage in the roads until the gates are opened. Large vessels enter preferably at the time of high tide to benefit to the maximum from the level of water under the keel and the best conditions of navigation.

Entry and leaving: Vessels entering must arrive in the roads at the latest 25 minutes after high tide, except for large vessels which must be in the roads at the latest at high tide. Vessels leaving must be ready at the latest 30 minutes after high tide.

Entry and leaving signals: Entry and leaving signals are exhibited on the signal post on the West jetty and on the repeater post of the fore port (signals in accordance with the Lisbon Convention of 23rd October, 1930.) At the Colbert Sluice and at the various locks the signals are simplified.

MAX. SIZE: Colbert Lock: 230 m. length, 40 m. width, controls entrance to Inner harbour, where depth maintained about 7.50 m.

Canada Docks: length 154 m.; width, 21 m.; draft 8 m.
Paris Dock: length 154 m.; width 21 m.; draft 8 m.

Opening of Canada and Paris basins: 2 hours before to 1 hour after full tide, night or day. The port is accessible to vessels up to 10,000–12,000 d.w.t.

HEALTH: Pratique given by Customs officers who board on arrival. In case of suspected disease, Master required to radio details to Agent in advance.

RADIO: Boulogne Radio (FFB). *Arrival advice.* Masters of vessels must send to the Port Authority, 24 hours in advance, or at the latest when leaving the previous port where this is located less than 24 hours away, the expected time of arrival in the roads, indicating the name of the vessel, tonnage, length, beam, the date and time of arrival, maximum draft of the vessel on arrival, the nature and tonnage of various items of its cargo and hazardous cargo (in transit or to be landed), possible damage to the ship, its equipment or to the cargo. A rectifying message must be sent in the event of a change. Address: Port Captaincy: 1 Quai Guynemer – Dieppe. Telephone (35) 84 10 55 – Telex: MARDIEP 180414F.

VHF: Dieppe Radio maintains continuous watch on Channels 21 and 24 and calls vessels on Channel 16. The Port Authority (Call sign "Dieppe Port") maintains watch on Channel 12.

TUGS: 3 tugs available (1,400 h.p., 750 h.p., 600 h.p.). Requests for use must be made to the Port Captaincy. Two tugs in service at all times.

BERTHING:

Dock	*Quay*	*Facilities*	*Length (m.)*	*Sea level chart*
Paris	Norvege	5 cranes 3 t; 2 cranes 3/6 t; 1 roll-on/roll-off ramp 1 crane 20 t.	715	7.5/9
	Maroc	1 crane 2.5 t; 1 cranes 5 t 5 gantry cranes 2.2 t. 6 noria conveyors for banana handling	600	7.5/9
Canada	Indes	2 cranes 6/12 t; 2 cranes 2.5 t; 1 grain bagging funnel	150	7.5/9
	Quebec	4 cranes 3 t; grain silo (cap. 12,000 tons). Capacity 500 t.p.h.	160	7.5/9
Avant-Port	Henri IV	2 cranes 3 t; 2 cranes 3/8 t 1 Roll-on/roll-off ramp	380	4.5/5 minimum

Handling capacities:

	Loading:
Colza oil	200 t.p.h. (from the quay)
Colza grains	60 tons/man hour
Grain and wheat	500 t.p.h. (silo)
Rough timber	23 to 28 cu. m./man hour
	Unloading:
Colza oil	100 t.p.h. (taken from quay)
Colza grains	50 tons/man hour
Sand and gravel	100 to 150 tons/man hour
Bananas	about 3,000 cartons/man hour
Citrus fruit on pallets	55 to 65 pallets/man hour
Citrus fruits not palletised (cases, cartons, crates)	16 to 21 tons/man hour
Pre-slung timber	about 80 cu. m./man hour
Bulk timber	about 25 cu. m./man hour
Iron and steel	50 to 60 tons/man hour

CRANES: One 30-ton crane at Quay de Tonkin. Two 40-ton jib cranes.

BRIDGES: There are 3 bridges without vertical obstacles, and to request opening of the Colbert Bridge give 3 long blasts on the ship's whistle, to call for the opening of the Admiral Rolland Bridge give 3 long blasts on the whistle, and for the opening of the Jehan Ango Bridge give 2 long blasts on the whistle.

STEVEDORES: Normal hours are 0800–1200 and 1400–1800. Possible to work from 1800–2200 to complete operations. No work on Sundays or holidays.

MEDICAL: All medical facilities available.

FRESH WATER: Is supplied by pipe-line. There are a great number of outlets on the quay.

FUEL: Available in small quantities; delivered by tanker lorry.

GANGWAY/DECK WATCHMEN: Available if required.

IDENTIFICATION CARDS: Embarkation card or passport is sufficient.

CONSULS:

Norway
Sweden
Denmark
Holland

REPAIRS: Good facilities exist, all types carried out.

DRY DOCKS: Dry dock in the inner harbour, dimensions 130×18 m. It can receive ships 129×17 m.
SURVEYORS: Bureau Veritas at Dieppe; Lloyds at Le Havre and Rouen; American Bureau of Shipping at Le Havre; Det Norske Veritas at Le Havre.
OPENING/CLOSING HATCHES: According to agreement, either by crew or stevedores.
CUSTOMS ALLOWANCES: EEC countries – 300 cigarettes 1.5 litres of spirits and an exemption of 600 francs. Antilles: 400 cigarettes, 1 litre of spirits of more than 22°; Africa: 400 cigarettes and 1 litre of spirits of more than 22° and an exemption of 140 francs per passenger.
REPATRIATION: Good facilities.
AIRPORT: Dieppe Saint Aubin (3 kms.) has two daily connections with Shoreham, England. The nearest main airport is Paris.
TIME: GMT plus 1 hour, but during the period from beginning April to end September (six months) the legal time is advanced by 1 hour (GMT +2).
HOLIDAYS: 1st January; Good Friday; Easter Monday; Ascension Day; Whit Monday; 1st May; 14th July; 15th August; 1st November; 11th November; 25th December.
POLICE/AMBULANCE/FIRE: Police (Duquesne Quay) 84-87-32 or 17. Fire and Ambulance 18 or 84-33-00.
TELEPHONES: No connections on the quays.
SERVICES: Compass adjusting, etc. available.
SHORE LEAVE: Allowed.
AUTHORITY: Commandant du Port.
AGENT: Jolasry (France), 6, Quai de Norvege – Dieppe. Telex 77965. Tel. 84–24–40.

DONGES: Refer to Nantes. (See Plan Book)

DUNKIRK: 51.03 N. 02.24 E. (See Plan Book)

PORT LIMITS: The seaward boundaries of the port within which a vessel is considered to be an "arrived ship" is the Dyck lightship or the roads if the ship comes from the East.
DOCUMENTS:
Entry Bill (all information about ship), given by Pilot to Captain, who fills it in and gives it to Harbour Officer.
To be given to Customs:
3 Crew Lists.
3 Passenger Lists.
Manifest or copy.
Form for increase of tonnage.
Declaration of open spaces.
3 Lists of objects held by crew.
PILOTAGE: Pilotage station limits – there are 2 pilotage zones.
1. The outer zone which is limited:
To the West by the meridian of Calais lighthouse;
To the East, by the meridian of 2° 27′ of Long. East;
To the North, by the line situated 3 miles seawards of the low water mark;
To the South, by the Calais pilotage zone, the coast and the inner zone defined below.
2. The inner zone limited:
To the West by meridian 02° 08′ East;
To the North, by a continuous broken line constituted by the parallel 51° 03′ N., the line of the coast, the meridian 02° 2′ E., the parallel 51° 04′ 30″ N.;
To the East by the meridian of Dunkirk lighthouse;
To the South by the end of the water levels of the autonomous port of Dunkirk.

Pilotage is compulsory in inner zone for ships over 150 n.r.t. or ships of max. length 50 m, or with dangerous cargo.

Pilotage compulsory in outer zone for ships not fitted with VHF, or over 1,000 nett tons or max. length 100 m.

Vessels coming from the West should call Pilots 12 hours before arrival. Vessels coming from the East should call Pilots 2 hours before arrival. ETA based on time of arrival at Dyck lightship, should be given through Boulogne Radio (telegraphy) or by radiophone (2182 kHz). In vicinity of pilot boat, vessels may communicate with Pilots by VHF Channel 16, or by Aldis lamp or flag signals when pilot boat is in sight. Telegraphic address of Pilot: Piloduk. Telex 82902.

Pilot boat is about 50 m. long, black hull with white horizontal stripe, "Pilot Dunkerque" written on hull. Black funnel with white anchors insignia.

Pilot boat is positioned between Dyck lightship and buoy CA.2. In bad weather, pilot boat may heave to on a parallel South of wreck buoy (*British Liberty*) and buoy DC, or put into port.
ANCHORAGES: Large vessels waiting for entrance must anchor in the area West of Dyck Light vessel. In bad weather, ships may anchor off English coast, in the roads of Les Dunes, with good mooring ground of sand and mud 20 m. deep. On the Roads of Dunkirk, ships must anchor East of buoy E.11 so as not to disturb the entrance of ships.
RESTRICTIONS: Vessels more than 180 m. length, or of more than 10 m. of draft, normally enter only at slack water, i.e. between 3 hours before high water and 2 hours after high water.
MAX. SIZE: The Charles De Gaulle Lock can receive ships with a draft of 12 m. at slack water before high tide and ships with draft of 14.20 m. at slack water after high tide. At night these permissible drafts are reduced to 12.00 m. and 12.5 m. In normal conditions of work, max. length of ship 270 m. (Turbine), or 280 m. (Motor), max. width 42 m. For entry of larger ships, Director of Harbour should be consulted beforehand.

Entrance through Watier Lock: max. length 235 m., max. beam 33 m., max. draft 11.50 m.

Maximum salt water draft at Charles de Gaulle Lock is 14.20 m., for vessels berthing at public wharf appontement No. 1 and 2 and at private Usinor berth No. 5 and 6.

Outer Port West: V.L.C.C.s up to 470,000 d.w.t. on a max. draft of 22 m. can use the new access channel to the Flanders Oil Berth in the outer harbour.
HEALTH: For ships coming from *(a) All European countries:* Declaration of health is not obligatory but general international certificates are controlled. *(b) Other Harbours:* Admission subject to declaration of health and usual controls of certificates. Admissions in free pratique only in daytime except special cases (intervention of a physician). Request for free pratique may be made to Sani-Port, Dunkirk, through Boulogne Radio. In case of necessity, health service can – on request – intervene at night.
RADIO: Dunkirk Harbour Station (FFF) for messages about port service through VHF Channel 12 and 11. Communications other than in VHF made through Boulogne Radio (FFB).
RADAR: There is radar at the control tower of harbour. It is not a guiding radar.
TUGS: Tugs normally join vessel between buoys DW.28 to DW.30. and DW.16. Smaller vessels are joined by tugs in the outer port.
BERTHING: Berthing priority is decided by Port Captain's office. Ship is informed by radio of the location and priority given to her.

Dock	Quay	Length	Min. Depth of water
1	Freycinet I	495.7 m.	7.00 m.
1	Freycinet II	251.5 m.	6.00–7.50 m.
1	Freycinet III	496.7 m.	6.80–8.00 m.
	Front du mole 1	187.3 m.	7.00 m.
2	Freycinet IV	426.3 m.	7.50 m.
2	Freycinet V	630.0 m.	7.50 m.
	Front du mole 2	139.5 m.	8.00 m.
3	Freycinet VI	524.1 m.	9.50 m.
3	Freycinet VII	509.6 m.	9.00 m.
	Front du mole 3	95.9 m.	8.00 m.
4	Freycinet VIII	552.2 m.	9.00 m.
4	Freycinet IX	507.2 m.	9.00 m.
	Front du mole 4	118.3 m.	10.00 m.
5	Freycinet X	474.1 m.	11.00 m.
5	Quai du silo	120.2 m.	10.00 m.
5	Freycinet XI	448.0 m.	11.00 m.
	Front du mole 5	390.5 m.	10.50 m.
6	Freycinet XII	706.5 m.	12.50 m.
6	Fond de darse 6	207.6 m.	12.50 m.
6	Freycinet XIII	703.2 m.	12.50 m.
	Front du mole 6	171.0 m.	5.00- 8.00 m.
	Upstream West Watier Lock	131.5 m.	8.50–12.00 m.
	Quai de Douvres	172.2 m.	10.00 m.
	Quai de Suez	244.0 m.	8.50 m.
	Quai des Monitors	241.3 m.	5.00–7.00 m.
Oil Port	N. station	105.0 m.*	13.00 m.
Oil Port	N. central station	95.0 m.*	13.00 m.
Oil Port	S. central station (1)	95.0 m.*	12.00 m.
Oil Port	N. coasting station	200.0 m.	8.00 m.
Oil port	S. coasting station	200.0 m.	4.00 m.
Bassin Maritime	Grain berth	205.6 m.	13.00 m.
Bassin Maritime	Quai Usinor No. 5 & 6	703.5 m.	16.00 m.
Bassin Maritime	Quai Usinor No. 2, 3 & 4	649.1 m.	14.00 m.
Bassin Maritime	Quai Usinor No. 1	277.3 m.	8.00 m.
Bassin Maritime	Heavy cargo berths No. 1 & 2	507.5 m.	16.00 m.
Bassin Maritime	Heavy cargo berth No. 3	183.3 m.	13.00 m.
Bassin Maritime	Heavy cargo berth No. 4	262.0 m.	13.00 m.
Bassin Maritime	Berths for general cargo (E. section for barges)	308.0 m.	4.00 m.
Bassin Maritime	General cargo berth	400.0 m.	14.00 m.
Bassin de Mardyck	Appt C.F.R. Poste Est	170.0 m.	14.00 m.
Bassin de Mardyck	Appt C.F.R. Poste Quest (2)	65.0 m.	16.00 m.
Bassin de Mardyck	Quais des C.M.P. (3)	85.0 m.	7.50 m.
Bassin de Mardyck	Quai de l'Escant	643.0 m.	12.00 m.
Fore-port – West	Appt petrolier C.F.R. (4)		23.50 m.
Dunkirk West			
Quai d'Alsace	Ferry berth		
Quai de Lorraine	Ro/Ro and Container berths	262 m.	7.00 m.
		500 m.	13.50 m.
Quai de Flandre	Ro/Ro and Container Berths	438 m.	13.50 m.

(1) Maximum length of vessels permitted:
North berths 260 m.
Central N. berths 240 m.
Central S. berths 240 m.
(2) Maximum length of vessels permitted:
E. station of CFR berth 250 m.
W. station of CFR berth 280 m.
(3) Maximum length of vessels permitted: 105 m.
(4) Maximum length of vessels admitted: approx. 360 m.
*platform

Cranes:

Electric Cranes: 125	Cranes of 3 t	Cranes of 6 t	Cranes of 10 t	Cranes of 15 t	Cranes 7.5/10 t
Quai de reparations			1		
Quai a marchandises diverses			2	3	
Freycinet I		5			
Freycinet II		3			
Freycinet III		4			
Freycinet IV		7			
Freycinet V		8			
Freycinet VI		5	1		4
Freycinet VII		9			
Freycinet VIII	4	8			
		4			
Freycinet IX		7	2		
Freycinet X		4	4		1
Feycinet XI		2			4
					6
Freycinet XII		5			9
Fond de Darse VI					
Freycinet XIII		3	2		4
Quai de Suez					

Floating Cranes:

Number of cranes	Lifting power	Outreach measured from the pontoon max.	Outreach measured from the pontoon min.	Height under hook	Power agent	Type	Equipment hooks	Equipment tonnes
1 (bigue)	250	7.20	5.00	32.00	Steam	Construction	2	125
	125	15.70	8.00	50.50		hollandaise	2	62.5
							1	10
							1	5
1 (Dravo)	90	13.10	5.20	30.00	Diesel	Dravo	1	90.7
	68.90	23.10	5.20	17.10	electr.		1	15
	15	30.10	7.70	41.4/20.6				

Mobile Cranes: 1 at 6/10 tons and 2 at 17/36 tons.

BRIDGES: Bridges of locks and wet docks are closed to navigation to allow trains or work hands to go. The maritime traffic is practically never disturbed.

BULK HANDLING FACILITIES: Bulk Quay No. 1, formerly known as the ore quay. Equipped with 3 gantry cranes. Principally used for iron ore destined for Usinor Dunkirk and Usinor Valenciennes.

Bulk Quay No. 2, a common quay with 2 berths belonging to the Dunkirk port authorities. Equipped with 2 polyvalent iron ore/coal gantry cranes. A third gantry crane is under construction. This quay is accessible for largest ships able to enter the port. Used to discharge coal destined for the Usinor coke mill, also receives coal for other operators, manganese ore and all iron ores for receivers other than Usinor.

Bulk Quay No. 3, an extension of the Usinor Quay for iron ore cargo. Equipped with 1 gantry of 50 tons capacity. Permissible draft at present 13.50 m. planned to be increased to 14.50 m. in the future.

Phosphate Quay, situated West of Bulk Quay No. 2. Berth is 600 m. long with a min. depth alongside of 14 m. Bulk carriers of 80,000 d.w.t. with a draft up to 41 ft. can be accommodated.

Unloading equipment consists of 3 cranes with grabs, each with a max. discharge capacity of 565 t.p.h.

Cereal berth is accessible to 80,000 d.w.t. ships. Along its internal face, coasters, lighters and 3,000 ton pushed convoys can be tied up. Handling operations are secured by 2 pneumatic gantries at a max. rate of 600 t.p.h.

CONTAINER FACILITIES: *Dunkirk-West:* Quai de Lorraine and Quai de Flandre. Total length 1,200 m. equipped with 4 container gantry cranes capable of lifting 45 tons on spreaders for 20–40 ft. units.

ROLL-ON/ROLL-OFF FACILITIES: *Dunkirk-West:* Quai d'Alsace is equipped for direct transhipment of vehicles, trailers and wagons. Quai de Lorraine and Quai de Flandre are provided with movable steel ramps for direct transhipment of vehicles and trailers.

Dunkirk-East: Quay Freycinet VII, the berth South of Freycinet VI, has been provided with a fixed ramp for roll-on/roll-off for ships up to 8 m. draft and 22 m. beam.

TANKERS: The following tanker berths are available:

Flanders Oil Berth: max. draft 22 m. Discharge lines to Total Refinery, and to the B.P. Refinery. The access channel has been dredged to a depth of 22 m. at L.W. The turning circle at the entrance to the Outer Port West has a diameter of 1,400 m. Max. discharge rate 20,000 cu.m./hr.

North wharf, max. draft 12.50 m. Loading/discharging pipes 26 in. diameter, bunker line 10 in. diameter.

Middle wharf North, max. draft 12.50 m. Loading/discharging lines 2 of 22 in. and 3 of 16 in. lines, bunker line 16 in. diameter.

Middle wharf South, max. draft 12 m. Dimensions of lines as for Middle wharf North.

Coasters Wharf, max. draft 7.50 m. Diameter of loading/discharge lines 6 in.

Bassin de Mardyck Oil Port, Appt C.F.R. – Poste Est. Max draft 12.50 m., Poste Ouest draft 14.20 m.

Facilities for discharge of dirty ballast are available at all main tanker berths.

STEVEDORES: Each captain will contact his consignee.

MEDICAL: Hospitals and all medical facilities.

DENSITY: Salt.

FRESH WATER: Available in unlimited quantities. Numerous hydrants on all wharves. Price of a ton of water for ships, 2.50 Fr.

FUEL: Supplied by barges or tank lorries if no connection at wharf. Fuel, diesel and gas oil available. Requests for bunkers must be made 48 hours in advance to Agents.

FIRE PRECAUTIONS: The following preventive measures are taken for tankers: Steel rope hung fore and aft along the side (a quick tow in case of hauling out the ship). Deck scuppers plugged. Hoods open on tanks with anti-fire device. Earth connection. Rounds of the port officers. Fire hose connected. Ship's captain is given instructions of the harbour concerning tankers. In case of storm, the Harbour Officer can stop loading or discharging.

GANGWAY/DECK WATCHMEN: Guarding is strongly advised.

OPENING/CLOSING HATCHES: Carried out by crew.

CERTIFICATES:

Certificate of Nationality.
International Certificate of Tonnage.
Certificates from the Classification Office where ship is registered, especially:
Certificate of Freeboard.
Classification Certificate, engine and boiler.
Classification Certificate, hull.
Classification Certificate, electric equipment for tankers.
List of Hoisting Apparatus.
Deratisation Certificate.
TOVALOP Certificate or similar for tankers.

CUSTOMS ALLOWANCE: Tobacco: Amount allowed for each member of crew: 200 cigarettes or 200 gramme tobacco. Wine and/or Spirits: 1 bottle.

IDENTIFICATION CARDS: An official identity certificate is compulsory ashore (passport, identification card, sailor's book, etc.).

DEVELOPMENTS: The new outer harbour covers 1,400 acres and is designed for vessels with drafts of up to 73 ft.

Unloading for tankers at Total Pier at a rate of 20,000 cu.m.p.h.

The new commercial port, "Rapid Transit Port" operational. The port is tidal. Facilities include a 260 m. quay for Load on/Load off and ro/ro berth. A container vessel of 400 ft. length and a ro/ro vessel of similar size can operate simultaneously. Also berth for ferry with rail sidings, parking and all other services.

CONSULS:

Belgium	Gt. Britain	Norway
Brazil	Greece	Portugal
Denmark	Italy	Spain
Finland	Luxembourg	Sweden
Germany	Netherlands	

REPAIRS: All repairs possible.

DRY DOCKS:

	Usable length at top	Usable length at bot.	Level sill m.	Admissable draft of ship	Max. length of ship m.	Max. beam of ship m.
Dry Dock No. 5	112.72	108.05	2.05	6.25 m. for tide of 5.20 m.	107	14
Dry Dock No. 3	90.36	86.40	0.55	5.40 m. for tide of 5.20 m.	80	13
Dry Dock No. 4	192.98	190.77	2.10	6.95 m. for tide of 5.20 m.	180	21

Dry Dock No. 6: Length 310 m. Width 50 m. Max. length of vessel 300 m. Max. beam 44 m. Max. draft 9.5 m. One crane 25 tons capacity available.

Floating Docks:

Characteristics of the dock	*Dock 13.000 T*	*Dock 20.000 T*
Overall length	170.20 m.	206.00 m.
Length on blocks	159.80 m.	185.00 m.
Width	24.60 m.	32.00 m.
Optimal characteristics of ships which can be docked		
Overall length	165.00 m.	205.00 m.
Overall beam	22.60 m.	30.00 m.
Maximum draft	6.70 m.	8.50 m.
Variation of draft allowed	3 cm./m.	2 cm./m.
Cranes	2 of 10 t.	2 of 7 t.

AIRPORT: Calais, Marck, 35 km.; Lille Lesquin, 80 km.

TIME: GMT plus 1 hour.

HOLIDAYS: 1st January; Easter; Whitsuntide; 1st May; 14th July; 15th August; 1st November; 11th November; Christmas. On public holidays, handling operations can be carried out from 0600 to 1200 hrs.

POLICE/AMBULANCE/FIRE: Police 66.59.01; Ambulance, Firemen 18.

TELEPHONES: In wet dock 6, in the tankers' harbour, at the quay for minerals, at the wharf for cereals, a telephone on board can be obtained and connected to the general system.

SERVICES: No specific port equipment for gas-freeing. Dirty ballast can be received at terminal of Societe Francaise des Petroles B.P. Compass adjustment, radio repairs.

SHORE LEAVE: Crew are allowed ashore.

AUTHORITY: Port Autonome de Dunkerque.

AGENT: Jolasry (France), 11 Rue des Arbres. Telex 82911. Tel. 66-99-01.

FECAMP: 49.46 N. 00.21 E. (See Plan Book)

DOCUMENTS:

2 Crew Lists.
2 Custom Lists.
1 Health Form.
Ship's Register.
Cargo Manifest.
Bills of Lading.

PILOTAGE: Pilots informed of arrivals by Agents. Pilots wait at port station 2 hours before high water each tide. Inform Harbour Master by VHF Channel 16.

ANCHORAGE: Half mile West of jetties.
MAX. SIZE: 100 m. length, 16 m. breadth and 18 ft. draft, entry any tides.
HEALTH: Pratique obtained when Customs Officer boards few minutes after berthing.
RADIO: Boulogne Radio. VHF at Harbour Master's Office, Channel 16.
TUGS: None.
STEVEDORES: Informed by Agents (available).
MEDICAL: Notice not required for medical attention. Doctors and hospital always ready. But it is better in case of urgency.
FRESH WATER: Available from shore (pipes each 50 m. on quay).
FUEL: No fuel in port. Available only by lorries for bunkering.
GANGWAY/DECK WATCHMEN: Not required.
OPENING/CLOSING HATCHES: By crew.
CERTIFICATES: In accordance with international regulations:

Load Line.
Radio Equipment.
Safety Equipment.
Deratisation, etc.

CUSTOMS ALLOWANCES: About 200 cigarettes per man; wine/spirits at Customs Officer's discretion.
IDENTIFICATION CARDS: Not required.
CONSULS:

Vice-Consulate of Norway	tel. 28.00.08.
Vice-Consulate of Denmark	tel. 28.08.62.

REPAIRS: Possible.
DRY DOCKS: 1 slipway for vessels of maximum 1,500 tons displacement.
REPATRIATION: Agents carry out these operations.
AIRPORT: Paris is the nearest.
TIME: Local time is GMT plus 1 hour, no alterations during year.
HOLIDAYS: Arrangements for working during holidays can be made if necessary.
POLICE/AMBULANCE/FIRE: Police, tel. 0.17; Ambulance, tel. 28.31.91 and 28.09.59; Fire, tel. 0.18.
TELEPHONES: No arrangements for placing telephone on board.
SERVICES: No possibilities for tank cleaning, etc. Compass adjusting available if necessary.
SHORE LEAVE: Always possible for crew members to go ashore.
AUTHORITY: Ingenieur des Ponts et Chaussees.

GRANVILLE: 48.50 N. 01.35 W.

DOCUMENTS: See "Calais".
PILOTAGE: Pilotage not compulsory for ships of less than 45 m. length, except for those carrying dangerous cargo. Pilots board from fishing boats carrying regulation marks of a pilot boat, and maintain position at Videcoq buoy when a vessel is expected.

Limits of Granville pilotage are: 1. On entering, towards the West, the line joining "la Pierre d'Herpin", and Chausey lighthouse. To the North, alignment of Chausey lighthouse and "le Pignon". 2. On leaving, alignment of Mont. St. Michel through Champeaux Point. Ships bound Granville required notify ETA 24 hours in advance. Telegraphic address, "Telex 77777 Usaport Granville".

1.5 hours before to 1 hour after high tide contact with Port Officer (tel. 50.12.45 Granville) can be established by relay through "Marines" Stations. During same hours contact can be made with pilot boat and with Port Office by VHF Channel 12 (port wave band 156.6).
ANCHORAGE: At landfall buoy of Le Videcog.
RESTRICTIONS: Draft restrictions apply at slack water.
MAX. SIZE: Largest vessel admitted length 119.0 m. Draft 6.6 m. Depth of water in channel 8 m.
HEALTH: Pratique arranged by Customs.
RADIO: Boulogne Radio for ships coming from the North. Brest-Le Conquet Radio for ships coming from the South.
TUGS: Port not equipped with tugs. Pilot boats used as "pushers" for port manoeuvres, or for carrying hawsers to tying-up points.
BERTHING: Dependent nature of cargo and ETA. Depth of water at zero tide is between 4 m. and 5 m.
STEVEDORES: Work hours 0800/1200, 1400/1800.
HOLIDAYS: See "Calais". Local holiday, Mardi Gras afternoon.
MEDICAL: Hospital available. Tel. 50.11.37.
TANKERS: 2 berths for unloading domestic fuels through 8 in. pipes.
DENSITY: 1025.
FRESH WATER: Available.
FUEL: No fuels readily available. 2 days notice required for tank lorry 200 km. distant.
OPENING/CLOSING HATCHES: Carried out by crew.
CUSTOMS ALLOWANCES: Tobacco. 200 cigarettes. Wines and spirits. 1 bottle spirits.
CONSULS: None.
DRY DOCKS/REPAIRS: None.
REPATRIATION: Paris, 3.5 hours by train.
AIRPORT: 10 km. from the port. Air-taxi and commercial fights.
TIME: Local Time GMT plus 1 hour in Winter and GMT plus 2 hours in Summer.
POLICE/AMBULANCE/FIRE: Police Tel. 50.11.16; Fire Service 18; Ambulance 50.11.37.
AUTHORITY: Officer Du Port.

HONFLEUR: 49.25 N. 00.14 E.

DOCUMENTS: See "Rouen".
PILOTAGE: Served by "Pilotage de la Seine" (address 9 Chaussee Kennedy, 76 le Havre). Ships bound for Honfleur are received on the Carosse Roads (Rade de la Carosse) where the following signals should be made for summoning a Pilot. By day – flag "G" of the international code of signals. By night – in Morse by signalling lamp.

Complementary signals which can be used on arriving on the roads. By day – globe or ship's national flag hoisted at masthead. By night – red light at main masthead. At all times, sound signal of 5 long blasts.

Advice of ETA and draft in salt water is to be given to Rouen Port at least 5 hours prior arrival roads, as well as to Agent.

Similarly, vessels anticipating a delay of more than 2 hours after their reported ETA should notify Rouen Port or the pilot boat of this at least 3 hours before the time originally reported.
RESTRICTIONS: Access to port made through channel 100 m. wide, protected by 2 dykes about 500 m. long, which leads to outer harbour. A tidal port, Honfleur possesses 3 basins:

Dock	*Length*	*Width*	*Sluice width*
West Dock	128 m.	77 m.	10.50 m.
East Dock	295 m.	71 m.	16.50 m.
Carnot Dock	788 m.	108 m.	13.00 m.

East Dock joins outer harbour: ships of more than 70 m. long must anchor in Carnot Dock which spans from East.
MAX. SIZE: Port can receive ships 100 m. long and 15.50 m. wide berthing in East Dock; but with Carnot Dock, only ships less than 12.50 m. wide can enter. Drafts vary according to tides: 6.00 m. with average tide, 4.70 m. in average slack water, and subject to variations because of silting up of harbour which necessitates frequent dredging.
HEALTH: Bill of Health is under the jurisdiction of Customs office of Honfleur. Hospital nearby.
RADIO: Vessels may use radio telegraphy to communicate all necessary information to the Information Centre of the Port of Rouen (Rouen Port) or to the pilot boat (call sign: FORI) These two keep each other mutually informed of all information received. A permanent watch is maintained by Rouen Port on Channel 16. Disengagement frequency after call on Channel 16: Channel 11 or Channel 12.

A Pilot is obligatory for every ship of more than 55 m. length.
TUGS: If necessary are provided by "La Societe des Abeilles" of Le Havre.
TANKERS: Berth "Miroline" on dolphins in River Seine for tanker of 18,000 tons eventually after lightening according to the depth conditions.
FRESH WATER: Available. Supplies arranged through Agent.
FUEL: Supplies arranged through Agent.
AIRPORT: 12 km. from Port.
AUTHORITY: Directeur du Port.

ILE ROUSSE: Corsica 42.39 N. 08.56 E.

DOCUMENTS:

3 Crew Lists.
3 Passenger Lists.
1 Provision List.
1 Cargo List.
1 List of Articles (new and Customs-barred) in possession each crew member – cameras, binoculars, radios, cigarettes, spirits, etc.
1 Health Declaration.

PILOTAGE: Not compulsory.
ANCHORAGE: Outside of port for cruise vessels.
RESTRICTIONS: None.
MAX. SIZE: Draft 5 m; length 160 m.
RADIO: Within 50 miles call Ajaccio Radio VHF Channel 16. Then connected over Channel 23 to telephone network.
TUGS: None available.
STEVEDORES: 24 hours accurate ETA necessary for ordering gangs. No work on Sundays and official holidays.
CARGO GEAR: Only a few nets and slings available; all other gear must be supplied by ship. Ship's derricks used.
FRESH WATER: Available at very slow pumping rate.
FUEL: Not available.
REPAIRS/CONSULS: None.
TIME: GMT plus 1 hour.

LA NOUVELLE: 43.01 N. 03.04 E. (See Plan Book)

DOCUMENTS:

1 Passenger List.
4 Crew Lists.
2 Stores Lists.
1 Cargo Manifest.
Bill of Health.
Safety Certificates.

PILOTAGE: Vessels call Pilot on VHF Channels 15 and 16. 3 pilot boats available. International Code pilot signals used.

MAX. SIZE: For port entry: length 135 m., beam 25 m., draft 6.50 m. Tanker sea line: max. draft 18m.

HEALTH: Pratique is given by Customs officers who board vessel on arrival. In case of suspected disease on board, Master should radio Agents advising details before arrival.

TUGS: Not available. There are several launches to assist in mooring.

BERTHING: Is effected in the order in which ships arrive. Specialised berth for Roll-on/Roll-off available.

STEVEDORES: Arranged by consignees.

MEDICAL: Doctors available at La Nouvelle. Nearest hospital is at Narbonne, 27 km. away.

TANKERS: 1 sea line berth at buoys in depth of water greater than 18 m. 4 dolphin berths in the oil dock, max. draft 6.50 m. One of these berths is used for LPG cargoes. No slop disposal facilities.

DENSITY: 1025.

FRESH WATER: Supplied at all town berths.

FUEL: Available from several suppliers.

FIRE PRECAUTIONS: Usual safety regulations strictly applied. A barrage can be positioned across the channel to contain burning oil.

OPENING/CLOSING HATCHES: Optional, performed by stevedores or crew.

CUSTOMS ALLOWANCES: Each crewman allowed to retain only sufficient for his own consumption while in port. It is forbidden to take alcohol ashore.

IDENTIFICATION CARDS: Any person going ashore should carry a passport or identity card.

CONSULS: No local representation.

REPAIRS: Not possible ashore, except very minor ones.

REPATRIATION: No difficulties.

TIME: GMT plus 1 hour. No changes.

HOLIDAYS: In principal, no work done on legal holidays.

POLICE/FIRE/AMBULANCE: Police, tel. 332011; Fire, 332017; Ambulance, 332011.

TELEPHONES: No connections can be made on board.

SHORE LEAVE: No restrictions.

AUTHORITY: Ponts et Chaussees, Service Maritime.

AGENT: See "Marseilles".

LA ROCHELLE/LA PALLICE: 46.10 N. 01.14 W.

(See Plan Book)

DOCUMENTS:
4 Cargo Manifests, or Manifest of Ballast.
Certificate of Cargo Space.
3 Bills of Lading.
Ship's Provisions List.
6 Crew Lists.
3 Passenger Lists.
Health Declaration.
Derat Certificate or Exemption.
Certificate of Crew Personal Effects.

PILOTAGE: Access from sea is through Pertuis d'Antioche, the strait between Isle of Re and Isle of Oleron. Pilotage compulsory for all vessels over 55 m. length. Pilot launch named *Armeria*, meets vessels at Chauveau Buoy in position 46° 06′ 05″ N. 01° 16′ W. Contact Pilot via VHF Channel 16, 2 hours before arrival. ETA should be given to Agent 12 hours before arrival.

Vessels which do not receive berthing instructions on arrival should wait in the vicinity and South of Chauveau Buoy, keeping watch on VHF Channel 16.

ANCHORAGE: About 330 yds. South of the end of the outer mole in depths of 36 ft. Mud bottom, good holding ground. In Westerly winds may be preferable to shelter nearer Isle of Re where water depth is 59 ft.

RESTRICTIONS: Vessels in excess of 360 ft. length can enter Inner Basin only from 2 hours before to 1 hour after high water. Loaded tankers over 5,000 d.w.t. may enter tidal harbour in daylight hours only.

MAX. SIZE: Outer pier mole, draft 30-40 ft. Tidal harbour, length 560 ft., draft 29 ft. Wet dock (inner basin), max. beam 69 ft., draft 25 ft. 6 in. neaps, 30 ft. springs.

HEALTH: Pratique given by Customs officers who board on arrival. In case suspected disease on board, radio Agent in advance advising details.

RADIO: Bordeaux-Arcachon Radio.

TUGS: Join vessels either in outer roads or inner roads of La Pallice. Normally tugs' lines are used.

STEVEDORES: Normal working hours for stevedoring are: 0800 to 1200 hrs. and 1400 to 1800 hrs. 2 hours overtime may be worked from 1800 to 2000 hrs. When a quick despatch must be given to a vessel, an 8-hour shift can be arranged, from 0500 to 1300 hrs. and 1400 to 2200 hrs. during the week, and 0500 to 1300 hrs. on Sundays and holidays.

MEDICAL: All facilities available. Advance notice should be given if assistance required on arrival.

TANKERS: Only refined products are discharged at La Pallice.

1. Oil berths situated at West side of outer pier mole, in depths of 31 to 36 ft. low water.

Service Essence Aux Armees: flexible hoses 250 mm. diameter.

Petroles de L'Ouest: pipe-line of 200 mm. diameter. Metal loading arm of 200 mm. diameter.

Picoty: pipe-line of 200 mm. diameter.

2. Oil berths at North quay in tidal harbour in depths of 26 ft.

Raffineries du Midi: Pipe-line of 250 mm. diameter, hoses 200 mm. diameter.

Petroles de L'Ouest: Pipe-line of 300 mm. diameter, hoses 250 mm. diameter.

Total: Pipe-line of 200 mm. diameter, hoses of 150 mm. diameter.

Essence Aux Armees: Pipe-line and hoses of 200 mm. diameter.

FRESH WATER: Available from all wharves. No barges available. Loading rate from the quay 60-75 t.p.h.

FUEL: Available by pipe-line at North Quay in Tidal Harbour. Otherwise supplied by tank trucks only.

FIRE PRECAUTIONS: Tanker berths are enclosed or surrounded by a barrier system. Smoking is prohibited on the tanker berths. The presence of a fire guard or representative of the fire service is necessary while a tanker is alongside the quay.

OPENING/CLOSING HATCHES: Performed by ship's crew.

GANGWAY/DECK WATCHMEN: Available from shore if required. Necessary for tankers loading/discharging cargo.

CUSTOMS ALLOWANCES: 200 cigarettes and bottle wine/spirits per man.

IDENTIFICATION CARDS: Crewmen going ashore should carry passports or identity cards.

CONSULS: No local representatives.

REPAIRS: All kinds of deck, hull and engine repairs can be carried out by Ateliers et Chantiers de La Rochelle-Pallice.

Vessels not exceeding 21 m. beam may be repaired in the inner basin. Larger vessels are repaired at berths outside the inner basin.

DRY DOCKS: 2 dry docks in Inner Basin: 577 ft.×72 ft. and 351 ft.×41 ft.

REPATRIATION: Can be arranged without difficulty.

TIME: 1 hour ahead of GMT. No change.

HOLIDAYS: New Year (1st January), no labour available; Easter Sunday, possibility of labour with overtime; Easter Monday, no labour available; Labour Day (1st May), no labour available; Ascension Day, possibility of labour with overtime; Whit Sunday, possibility of labour with overtime; Whit Monday, no labour available; National Day (14th July), no labour available; Assumption Day (15th August), no labour available; All Saints' Day (1st November), no labour available; Armistice Day (11th November), possibility of labour with overtime; Christmas Day (25th December), no labour available.

N.B. Every Sunday and day marked "possibility of labour with overtime" can be worked at the rate of 100% extra.

POLICE/AMBULANCE/FIRE: Police Secours 17; Commisariat Central 41.22.44; Ambulance 18; Fire Service 18.

TELEPHONES: Telephones are available at all berths at the mole, and are obligatory for vessels handling dangerous cargo.

SHORE LEAVE: Allowed, no restrictions.

GENERAL: Old harbour at La Rochelle is used only by fishing vessels and pleasure craft.

AUTHORITY: Capitainerie du Port de La Rochelle-Pallice.

AGENT: See "Paris".

LE HAVRE (Including Antifer): 49.30 N. 00.07 W.

(See Plan Book)

DOCUMENTS: At arrival in-bound bill tendered by Pilot to be filled up and signed by Master specifying ship's data and more especially open spaces occupied (shelter) and dangerous cargo on board. After berthing:

For Custom's Officers
1 Crew List.
1 Crew Declaration List (personal effects, camera, radio set, cigarettes, cigars, tobacco, etc.).
1 Ship's Store List.
1 Passengers' Manifest (disembarking).
1 Passengers' Manifest (in transit).

For Health Officers
1 Crew List.
1 Health Declaration.
Deratisation Certificate.
1 Passengers' Manifest (disembarking).
1 Passengers' Manifest (in transit).
Individual international Certificates of Vaccination.

For Custom Broker
1 Crew List.
1 Crew Declaration List (personal effects, camera, radio set, cigarettes, cigars, tobacco, etc.).
1 Ship's Store List.
1 Certificate of open space occupied by cargo.
1 Passengers' Manifest (disembarking).
1 Baggage Manifest (non-accompanied).
Tonnage Certificate.

For Agents
1 Crew List.
2 Passengers' Manifests (disembarking).
2 Passengers' Manifests (in transit).
2 Baggage Manifests (accompanied).
2 Baggage Manifests (unaccompanied).
2 Dangerous Cargo Manifests and usual cargo documents.

For Immigration Office
1 Crew List.
1 Passengers' Manifest (disembarking).
1 Passengers' Manifest (in transit).

PILOTAGE: ETA to be sent to Harbour Master (see "Radio"). Advisable then to confirm directly either to Pilot boat *Francoyse de Grace* (call sign FNZH) or to "Havreport" between 24 and 12 hours before arrival (see "Radio"). Pilot boats have black hull with "Pilote Havre" in white letters on both sides, white funnel with black top stripe, green flag with white anchor on fore-mast. Located off Le Havre channel entrance East of the intermediate landfall buoy (LH). Pilot boat on continuous service, a helicopter is also available.

Vessels may anchor near lighthouse South of entry alignment in good weather and further off in bad weather.

Light or sound signal to be made by vessels requiring a Pilot, letter "G" in morse code.

ANCHORAGES: Anchoring forbidden in the channel between both parallels 100 m. South and North of channel and in a zone 1 nautical mile long and 500 m. wide in prolongation of channel.

RESTRICTIONS: Depth in main channel 51 ft. LW. Depth in tidal basin 49 ft. LW.

Main lock entrance to enclosed basins, length 1,312 ft. width 220 ft., depth 49 ft.

Vessels berthing in tidal docks (Bassin Theophile Ducrocq) dependent on tide if draft in excess of 30 ft.

Quinette de Rochemont Lock open from 2 hours 20 min. before high tide until 40 min. after. During this period vessels of max. length 210 m. and max. breadth 26 m. may pass through. Otherwise max. length authorised is reduced to 180 m. In some circumstances some locks are completely closed around low tide.

CIM Berth No. 10 may receive tankers up to 300,000 d.w.t. with draft varying between 63 and 68 ft. depending upon tide. Such vessels enter only by daylight and must arrive at Lightvessel at least 3 hours before high water.

MAX. SIZE: Tankers: length 1,300 ft., draft (approx.) 65 ft. subject tide. Largest vessel recorded is a tanker, length 370 m., beam 64 m., draft 20.67 m. and deadweight 290,875 metric tons.

Bulk Carriers: Up to 90,000 tons.

Antifer: "See Tankers."

HEALTH: Free pratique automatic for vessels coming direct from Continent or Italy and "Q" flag not to be flown. From other countries including Spain and Portugal usual applies. Free pratique may be obtained by radio message to Sanipor Le Havre specifying name of vessel – where coming from – total number of Crew members, number of Crew members vaccinated (smallpox, yellow fever, cholera).

Tankers: For tankers it is advisable to ask free pratique by radio in order start operation as soon as vessel berths.

RADIO: Masters of ships are requested to send to Le Havre Harbour Master their expected time of arrival at Le Havre lightvessel.

The message will be sent through radio stations of: Boulogne-radio/FFB (working frequencies 1771 kHz and 2747 kHz) or Brest le-Conquet radio/FFU (1806/2726 kHz).

It will give the date and time GMT of ETA, and the maximum draft. It will be sent about 12 hours before arrival and corrected by another message if necessary. This service is free. Same stations of Boulogne and Brest to be used to contact Agent and in addition Saint Lys/FFL. This ETA must be confirmed to Le Havre Port by VHF, three hours before arrival in the roads.

Port operation radio service: The Havreportradio station keeps a permanent watch on the following frequencies: 156.6 mHz (Channel 12); 156.8 mHz (Channel 16); 157.0-161.6 mHz (Channel 20 duplex). This station sends and receives all messages for the port operations control.

Ships call Havreportradio directly on Channels 12 or 20. Ships arriving, leaving or moored on roads *must keep watch on Channel 16*.

Ships with Pilot on board must keep watch on Channels 12 or 20 from Pilot on board until arrival at berth, and from departure of berth until disembarking Pilot. Havreportradio/FFY keeps watch on 2.182 kc/s. This frequency will be used only in a radius of 22 miles from Havre lightship and only when it is not possible to use VHF.

RADAR/VHF: Radar assistance may be obtained by calling Le-Havre-Radar on Channel 16 (156.80 mHz). Then working frequencies are Channels 14 and 22.

TUGS: 19 tugs available, from 650 to 4,000 h.p. Normally join vessel inside the jetties in outer harbour. Ship's lines or tug's lines used at ship's option. Extra charge for use of tug's line.

BULK HANDLING FACILITIES: *Ore Berth:* Situated South side of Mole Centrale. Accessible to 90,000 d.w.t. ore carriers. Equipment includes 4 unloading gantries, each with max. capacity 500 t.p.h.

A second ore berth (Mole Central 6) is in operation. It is accessible to ore carriers of 120,000 d.w.t. It is equipped with 2 gantries each with a maximum capacity of 1200 t.p.h.

Grain: Quai Hermann du Pasquier for ships up to 30,000 d.w.t. 3 elevators capacity each 280 t.p.h.

Quai Joannes-Coubert: for ships up to 60,000 d.w.t., 2 elevators each 600 t.p.h. capacity.

Containers: Quai de l'Atlantique: Length 800 m., 3 berths for large vessels, one of which is also equipped to handle roll-on/roll-off traffic.

4 gantry cranes of 40 ton capacity with 35 m. extension, at quay's edge. 2 French Railway's gantries for handling on to wagons. 1 7,000 sq. m. shed under construction near to terminal for container groupage and breaking bulk. 16 hectares open air areas. Extensive parking facilities.

Quai de l'Europe: Length 1,800 m. 4 berths for large vessels, 3 of which are equipped to handle roll-on/roll-off traffic.

4 gantry cranes of 40 tons with 40 m. extension, at quay's edge. 1 shed 10,108 sq. m., 1 shed of 7,023 sq. m., already used for groupage and break-bulk of containers and 1 shed of 10,000 sq. m. under construction.

2 S.N.C.F. gantry cranes for loading and unloading of wagons. 45 hectares of open air areas. Extensive parking facilities.

Quai de Bougainville: Actual length 600 m. – will be extended to 1,200 m. end 1978. Equipped with 4 gantries for containers of 40 tons.

Methane: The Gaz de France Methane Terminal situated at Western end of tidal basin with one berth for vessels up to 755 ft. length.

Roll-on/roll-off: Three berthing places in the tidal basin, five berths in the wet dock, eight berthing places in the non-tidal docks.

Liquid Chemicals: at the berths of "Societe Normandie de L'Azote", "Sogestrol", and "Petrochimie" along the "Canal Central Maritime".

BERTHING: Agents generally inform Master by radio of berthing prospects, arrival time limits and any special requirements.

Dock	*Quay*	*Facilities*	*Length* (m.)	*Sea level chart* (m.)
Bassin de	Southampton	1 crane 3/6 tons	70	−5.00
la Manche	Roger	5 cranes 5/10 tons	500	−9.5
	Meunier	5 cranes 4/10 tons		
Theophile	Floride	4 cranes 5/10 tons	598	−10.00
Ducrocq	Joannes	3 cranes 4/10 tons; 19 cranes	1,528	−10.00
	Couvert	5/10 tons		
		1 crane 6/10 tons		
	Mazeline		428	−10.00
	Mole Central 3		120	−10.00
	Mole	4, 15 ton gantry cranes	194	−12.00
	Central 4	Coal+minerals		
	Mole Central 6	Coal	230	−16.00
	C.I.M.1		84	−11.00
	C.I.M.2		84	−11.00
	C.I.M.3		85	−10.00
	C.I.M.4		83	−11.00
	C.I.M.5		152	−11.00
	C.I.M.6		120	−12.00
	C.I.M.7		120	−12.00
	C.I.M.8		75	−18.00
	C.I.M.10		56	−21.00
Bassin Rene	Atlantique	4 cranes 40 tons	800	−10.00
Coty	Mole			
	Central			−9.00
Bellot	Hermann	4 cranes 6 tons; 19 cranes 3 tons	1,524	−4.00
	du Pasquier	Cereals+fruits+general cargo		
	Jean	3 cranes 10 tons; 4 cranes 3 tons	486	−2.50
	Reinhart	General cargo; wood		
	Tonkin		100	−1.50
	Colombie		80	−1.00
	Bresil	2 cranes 6 tons; 2 cranes 10 tons	525	−2.00
Leure	Cameroun	3 cranes 6 tons	224	−1.00
	Marseille	2 cranes 6 tons	135	−1.00
	Malakoff	Bulk liquid – non oil	140	(0)
	Guinee	2 cranes 6 tons	317	−1.35
Dixieme	Rochambeau	1 crane 6 tons	237	−0.50
Bassin				
Citadelle	Norvege	3 cranes 6 tons	360	+1.00
Bassin	Antilles		555	−0.75
Dock	Reunion	5 cranes 6 tons	555	−0.75
Vetillart	Gironde	10 cranes 6 tons; 6 cranes 10 tons;		
		5 cranes 10 tons;		
		2 cranes 10 tons	931	0 to −1.0
	Garonne	12 cranes 3 tons	955	+1 to −1
Marcel	Rhin	4 cranes 10 tons	628	−1.50
Despujols	Moselle	2 cranes 6 tons; minerals	317	−1.50
Lancement	Sepp	Refined oil	103	+3.00
Canal				
Tancarville	Orcher	Refined oil	85	+1.00
Canal	Europe IV	1 crane 40 tons	270	−2.00
Bossiere	Europe I, II & III	3 cranes 40 tons	910	−6.00
	Appontement Jonction I	Refined oil	9	−1.00
	Appontement Jonction II	Refined oil	14	−1.00
	Jonction III	Refined oil	15	−6.00
Grand	S.N.A.	Bulk fertilizers	140	−3.00
Canal de	Sogestral 1	Chemical	10	−3.70
Havre	Sogestral 3	Products		(0)
	Petrochimie	Chemical products	40	−4.00
	Lafarge	Cement	95	−3.00
	Roll-on/roll-off	Ro/Ro 1		−3.50
		,, 2		−4.00
		,, 3	230	−3.30
	Cofaz 1	Fertilizer	230	−5.00
	Cofaz 2	Fertilizer	15	−3.50
Darse de L'Ocean	Bougainville	4 cranes	600	−5.50

BRIDGES: No special restrictions. Opened upon request. Master will be informed as above in case any bridge stopped for repairs.

STEVEDORES: 2 Normal shifts (0700-1500 hrs. and 1500-2300 hrs.) every week-day including Saturday. Night shift in overtime 2300-0700 hrs. For fruits and reefer cargo and passenger ships possible working 2 hours overtime before morning shift to start at 0500 hrs. subject ordering gang the previous day at 0600 hrs., with 23 hours notice to stevedores. Night gang ordered the same day at 1400 hrs. with 9 hours notice to stevedores (same consequently involves 36 and 12 hours notice to Agents for morning and night overtime respectively).

For vessel completing loading/discharging may order 2 hours overtime from 1500 to 1700 hrs. after morning shift or only 1 hour overtime from 2300 to 2400 hrs. after afternoon shift. No possibility of dividing the shift of 8 hours. Consequently time lost between completion of work and end of shift is charged to the vessel at the cost of about Frs. 560.00 per hour (depending upon type of cargo).

No work possible on Sunday and legal holidays nor during night between Sunday or holiday and next working day. Necessary to give Agent soonest possible accurate ETA and hatch partition in order to enable his arranging work at the best, keeping in mind that shift cannot be split.

Work done with shore crane. Ship's derricks used only exceptionally. No hatch tents available from shore.

It is compulsory to put a net under the gangway before starting work, for lack of which stevedores refuse to go on board.

MEDICAL: It is not necessary for Agent to receive advance notice of required medical attention except when Master requests a doctor on board. The Master must after berthing inform Agent of number of patients and nature of disease, name of patient, rank, in order Agent may arrange corresponding appointment with doctors, dentists, specialists, etc. Hospital facilities available provided admission ordered by local doctor.

Inoculation. Yellow fever – effected only at the hospital once per week on Thursdays 1400 to 1500 hrs. Other inoculations may be effected by local doctors (with appointment) but smallpox may also be effected at the Town Hall sanitary office on Tuesday and Saturday from 0900 to 1200 hrs.

TANKERS: Berth at C.I.M. piers No. 1 to 10. Depths 9.5 – 21.0 m. Diameter of connections at different berths of C.I.M.: No. 3, 4 and 5, 10 in.; 6 and 7, 12 in.; 8 and 10, 16 in.

Tankers calling first time at Le Havre recommended to inform Agents of position of manifold connection. Slop reception facilities available up to 1,000 t.p.h.

Berth	*Max LOA (m.)*	*Depth (m.)*	*Pumping rate t.p.h.*	*Max d.w.t.*
C.I.M. 1	175	10.00	900 (essence)	22,000
C.I.M. 2	198	10.00	1000 (essence)	22,000
C.I.M. 3	242	10.00	2000 (crude)	50,000
C.I.M. 4	200	10.00	4000 (crude)	30,000
C.I.M. 5	230	10.00	4000 (crude)	40,000
C.I.M. 6	260	12.00	5000 (crude)	90,000
C.I.M. 7	278	12.00	7000 (crude)	100,000
C.I.M. 8	350	17.00	10/15,000 (crude)	230,000
C.I.M. 10	350	21.00	15/20,000 (crude)	280,000
Antifer W	500	29.80	15/20,000 (crude)	500,000
Antifer E	500	29.80	15/20,000 (crude)	500,000
Mazeline 1	350	10.00	800 (gas-oil fuel)	
M.C. 3	220	10.00	1000 (gas-oil fuel)	45,000
M.C. 4 Ext.	280	12.00	700 (gas-oil fuel)	90,000

Antifer:

The port of Le Havre – Antifer, attached to the port of Le Havre which covers it administratively, is a port on the coast, located 4 km. South of Cape Antifer, at Saint-Jouin-Bruneval.

It is an oil terminal, designed to accommodate during a first stage vessels of 540,000 d.w.t. and of 28.5 m. draft.

The port comprises: A breakwater 3,500 m. long protecting the port in its Northern area and starting at Groin Point, 3 km. South of Cape Antifer. A manoeuvring zone. A dry-land area of 35 hectares at the foot of the cliffs intended for hydrocarbon storage and for port operation installations. A 8 hectare service port. A mooring installation with 2 positions for tankers. The oil discharged into storage tanks is pumped away to installations in Le Havre port, by means of a pipe-line of 42 in. dia. and 25 km. long.

Tides and Currents: At Antifer, the influence of the Seine estuary is much less than at Le Havre. The tidal curve is of the sinusoid type, without, however, being perfectly symmetrical. Slack water only lasts a short while (about 20 minutes). With winds from the North to East, there is a drop of about 0.25 m. to 0.50 m. increasing with the amplitude of the swell.

With winds from the South to N.W., passing through a Westerly point, there is either a slight drop (0.15 m.) or a rise corresponding to the extent of swell and sometimes reaching 0.75 m.

Tidal currents are alternating in their direction and generally parallel to the coastline. With Spring tides they reach a speed of 3 knots.

The breakwater protects the port from the action of ebb currents.

Access: Vessels coming into the Port of Le Havre-Antifer will find 35 miles from the coast landfall buoys "A0", "A1" at the limit of the 50 m. depths.

Access is as follows: *An Approach Route* of a width of 3 miles and extending from the landfall buoys "A0" and "A1" on a bearing of 118.5° for 22.7 miles.

A Waiting Area which has the approach route on its Southern edge. It has the form of a trapezium 2 miles in length. The Western commencement of the large base of this area is marked by buoy "A3". It incorporates 2 anchoring areas: the N.W. area for vessels of more than 25 m. draft, and the S.E. area for vessels of less than 25 m. draft. The 2 areas are separated by buoy "A5".

A Connecting Area trapezoidal in shape and 2.5 miles in length, connecting the approach route to the approach channel.

An Approach Channel, 1,000 m. wide, marked on its Northern edge by buoys "A8", "A12", "A14", "A16", "A18", and on its Southern edge by buoys "A7", "A9", "A17". This channel is orientated in the same direction as the approach route on a bearing of 118.5°. Buoys "A7", "A8" and "A9" form at the entry of the channel a triangle easily identifiable by radar.

An Access Channel 3.5 miles long, 700 and then 550 m. wide and on a bearing of 127.5°. It is marked by 4 pairs of buoys: "A19/A20", "A21/A22", "A23/A24", "A25/A26". Its depth is 24 m.

A Separation Area adjacent to and to the South of the access channel, allowing vessels on entering to make a half-turn to come out of the channel and then come if necessary to the waiting area. The centre of this area is marked by buoy "DA".

A Swinging Area sheltered by the main breakwater, marked to the South by buoy "A27", and to the East by buoy "A29". This area is dredged to a depth of 25 m.

The conditions of current (direction and force) and the height of the tide determine, in terms of the drafts of vessels, the periods during which the port may be entered, and which are somewhere between full and low tides.

Vessels must, therefore, on leaving the separation area, follow entry instructions given to Captains by the Pilots, with the agreement of the Port Captaincy of Havre-Antifer.

Pilotage: The Pilot is taken onboard in the waiting area in the disengagement area by means of a pilot boat, a launch or the helicopter allocated to the Le Havre pilotage service.

Port: To the N. of the swinging area, is the mooring area dredged to 26 m. allowing access to 2 alongside berths which have depths of water of 29.80 m.

The service port is reserved for the mooring of tugs, pilot boats, anti-pollution equipment (barrages) and servicing equipment.

Arrival Advice: Captains of vessels destined for Antifer, as well as those whose vessels may enter either Le Havre or Antifer, must send to the Port Commandant of Le Havre a message stating the date and time GMT of their arrival at the Antifer landfall buoys or at the Le Havre lightship and stating the draft of their vessel.

This message must be sent via a coastal station at least 12 hours in advance and confirmed by a VHF message 3 hours prior to arrival at the landfall buoys of Antifer or at the lightship. In return, the vessel will receive from the Havre Port station all information and necessary instructions.

Radio: The Antifer port captaincy (call sign HAVRE-ANTIFER) listens out permanently on the following frequencies:

156.8 mHz.	(Channel 16)	VHF
157.10 – 161.7 mHz.	(Channel 22).	

If Channel 22 is not available on board the vessel, Channel 14 (156.7 mHz) can be used after having first called up on Channel 16.

Radio communications are used for: Port operations (movements of vessels) and guiding vessels during times of fog.

Radar Assistance: During times of fog, radar assistance is supplied to vessels by the radar located on La Heve lighthouse (guidance provided by the Semaphore Lookout of Le Havre) as well as by the radar of the Oil Terminal (guiding provided by the Captaincy of Antifer). Vessels requiring radar guidance must start by requesting it on the call-up frequency (Channel 16). Only after an affirmative reply can they switch in to the connections affected by radar, taking necessary precautions (listening out in advance) not to disturb a guiding process already taking place. Assistance is given in strict rotation of requests. Information is supplied free of charge in French and in no way renders the Port Authority responsible. Such information covers the following: route clear or not, vessels anchored or under way in the vicinity, successive positions in relation to the landfall buoys, possible position of the pilot vessel, then guidance in the channel as far as the swinging area and mooring area.

Syledis: A system of aid to navigation and to manoeuvring, covering the receipt on board the vessels of parameters covering in particular the position, the speed, is in the course of being tried out. It requires the Pilot bringing on board a small transmitter/receiver.

Aids to Manoeuvring: In order to facilitate swinging manoeuvres and mooring of large tankers, the port of Antifer has 3 lights of different colours, the positions and characteristics of which are as follows:

Access guiding light (on the open storage area at the foot of the cliffs) – light with red, white, green sectors, regularly flashing (4 s.) the red sector to the North the green to the South.

Guiding lights for coming alongside (on the breakwater).

West light (position 3) – light of red, white, green sectors, regularly flashing (4 s.) – Red sector to the East, green to the West.

East light (position 2), light of red, white, green sectors, flashing twice (6 s.), red sector to the West, green to the East.

Each quay berth is equipped with aids for mooring comprising luminated panels showing the distance to the berthing point of the bow and the stern of the vessel; the speed (in cm/sec.) of approach or pulling away of the bow and stern of the vessel in relation to the berthing point.

Fresh Water/Fuel: Supplied by pipe-lines on the berth (S.H.M.PP. depot).

Cranes: 2 cranes of 2.5 tons capacity on the berth (1 per position). Berth for heavy items in the service port – handling by mobile crane.

Floating Equipment: Pontoon for transporting heavy items.

Tugs: Stationed in the service port 1 or 2 tugs of 3,600 h.p. Other tugs required for manoeuvring come from Le Havre.

Pollution: Barrages laid on pontoons in the service port can be very quickly placed into service.

General Information:

The Port Captaincy is situated on the open land area of the Service Port.

Telephone: 22.81.40 Extension 886 or 987.

Pilot's office: In the C.I.M. operational office (2nd floor).

Customs: In the C.I.M. operational building (1st floor).

Towing: The Les Abeilles Company on the pontoon in the service port.

Pilotage: In the C.I.M. operational building (1st floor).

Police: In the C.I.M. operational building (1st floor).

C.I.M. Depot: 27.21.10 – 21.21.77.

S.H.M.PP. Depot: 27.20.73.

Communications: By buses from Saint Jouin. The airport of Le Havre – Octeville is 16 kms. to the South of Antifer.

Control tower: Tel. 46.38.02.

Operating: Tel. 46.09.81.

DENSITY: In outer port and tidal docks: salt water. In inside docks brackish. Density depending upon season and amount of fresh water brought in by river Seine and Canal de Tancarville.

FRESH WATER: Most berths supply by shore hydrants. Otherwise by barge minimum quantity invoiced then being 50 c.b.m. Overtime charged in addition. Late cancellation of barge invoiced.

FUEL: All grades available, viscosities from 200 sec. to 3000 sec. Redwood. Minimum 48 hours advance notice required to prepare barges.

FIRE PRECAUTIONS: Dangerous cargo must be declared on "Inbound Bill" and in order not to delay vessel's entry it is highly recommended to inform Agent of quantity and exact nature of dangerous cargo on board 48 hours prior to arrival, thus enabling Agent to get in touch with Harbour Master and take necessary steps which may go from a single smoking prohibition up to a fire-picket on the quay during all the call.

Tankers: A "notice to Master's of ships loading/unloading hydrocarbons" is handed to Master upon arrival. This notice specifies *inter alia:* repairs, ventilation/cleaning of tanks, handling of goods subject to Harbour Master's authorisation. All naked lights and fires prohibited, boiler furnaces and galley ranges excepted, such exception cancellable on simple order of Harbour Master or Depot Manager.

DEVELOPMENTS: The new oil terminal of Havre-Antifer, built to the South of Cape Antifer has installations enabling vessels of 550,000 d.w.t. to be received at all states of the tide. Shelter will be created by a protective mole 3,520 m. in length. At the foot of the cliff, there will be a service port and open-air work areas. An access channel 550 m. wide to a depth of 25 m. will be dredged.

A second stage will see the provision of 2 further installations after further deepening of the sea to 30 m. in order to take vessels of 1,000,000 d.w.t.

GANGWAY/DECK WATCHMEN: Not compulsory. Sworn watchmen in uniform and equipped with a VHF set may be obtained from the Port Authority per hour for day and night, working days and holidays. Some other companies may also supply watchmen (not sworn) at lower prices.

OPENING/CLOSING HATCHES: May be done by stevedores at the same price as shifting of cargo depending upon the type of cargo and consequent number of men included in the gang.

It is highly recommended to carry out opening by the crew before beginning of shift to avoid both loss of time and expensive charges and also risk of accident to stevedores who are sometimes not well aware of vessel's closing system.

It is emphasised that for reefer cargo stevedores wait for cold exhaust half an hour after opening hatches before getting down in the holds. Consequently it is strongly advised to stop ventilation and start opening hatches with crew about 1 hour before beginning of shift keeping in mind that for reefer cargo, the morning shift may commence at 0500 hrs.

CERTIFICATES:

Tonnage Certificate.
Safety Construction Certificate.
Loadline Certificate.
Safety Radio Certificate.
Safety Equipment Certificate.
Deratisation Certificate.
Cargo Gear Register.
(Fresh water analysis certificate may also be requested.)

CUSTOM'S ALLOWANCES: 200 cigarettes or 200 grammes tobacco plus 1 bottle spirit (must be mentioned on crew declaration list). Crew members may obtain extra allowance but only after 5–6 days' call.

CARGO GEAR: Cargo handling usually carried out by means of shore cranes. Hatch-tents to be supplied by vessel.

CREW IDENTIFICATION CARDS: Not required. Recommended to have passport or seaman book to go ashore.

CONSULS: The following countries have representatives at Le Havre:

Brazil
Colombia
Dominica
Guatemala
Italy
Portugal
Sweden
Germany
Mexico
Great Britain
Ecuador
Venezuela
Haiti
Netherlands
Argentina
Switzerland
South Africa
Panama
Denmark
Belgium
Norway
Greece
Honduras
Peru
Salvador
Uruguay
Chile
Costa Rica
Ivory Coast
Spain
Finland
Japan
Liberia
Madagascar

REPAIRS: Several companies including Ateliers et Chantiers du Havre available to handle all types of hull and engine repairs. 5 berths available for repairs afloat.

DRY DOCKS: 7 dry docks available, largest of which is 1,095 ft. working length and 125 ft. width for vessels up to 80,000 d.w.t.

REPATRIATION: Except if airplane chartered by Owners, all crew have to pass through Paris.

AIRPORT: Le Havre airport 7 km. from the centre of the town, with a runway of 1800 m. × 40 may receive chartered planes up to 40 tons total weight (50 T. with special authorisation). Regular flights from and to Orly (Paris Airport) twice a day, holidays excepted.

TIME: GMT plus 1 hour from 26th September to 28th March and GMT plus 2 hours 28th March to 26th September.

HOLIDAYS: New Year's Day (January 1st); Easter Monday; Labour Day (May 1st); Ascension Day; Whit Monday; National Holiday (July 14th); Assumption B.V. Mary (August 15th); All Saint's Day (November 1st); Armistice Day (November 11th); Christmas Day (December 25th). No work possible except for passenger ships and tankers the latter being loaded/discharged round the clock every day.

POLICE/FIRE/AMBULANCE: Police 17 or 48.15.20; Fire Brigade 48.05.77 or 18; Ambulance 42.30.68 or 42.46.46; Hospital 42.77.83.

TELEPHONE ON BOARD: Possible at most berths.

SHORE LEAVE: Authorised within port and town area. Foreign seamen wishing to go further and more especially to Paris must obtain police authorisation and consequent pass.

REGULATIONS: Vessels carrying dangerous cargo must when on roads or in the entrance channel, show the red flag by daylight or 1 red light by night-time. When leaving the port they must keep their Pilot up to the end of the channel.

AUTHORITY: Port of Le Havre Authority.

AGENT: Jolasry (France), 45 rue Lord Kitchener, PO Box 846, 76060 – Le Havre. Telegraphic address "Jolasry". Tel. 42.18.32 and 42.12.05. Telex 19708.

LORIENT: 47.45 N. 03.21 W.

DOCUMENTS:

Cargo Manifest or Manifest of Ballast.
Certificate of Cargo Space.
Bills of Lading.
Ship's Register.
6 Crew Lists.
3 Passenger Lists.
Health Declaration.
Derat Certificate or Exemption.
Declaration of Crew Personal Effects.

PILOTAGE: Compulsory for all vessels over 60 m. length. Vessels must contact pilot station advising ETA at least 6 hours before arrival by radio to the pilot station. On arrival at the outer roads or Groix vessels should call Pilot by VHF Channel 16. The pilot launch will be standing by from 1 hour before to 1 hour after the ETA previously advised by the ship. The pilot station is manned 24 hours per day. Pilot station telephone number 210678.

ANCHORAGE: The outer roads of the port are open to winds from the Southeast to Southwest. Vessels waiting to enter the port may anchor in depths of 15–20 m., sand and shell bottom, good holding ground.

Mooring buoys are positioned off Port Tudy on the North coast of Ile de Groix. These buoys are reserved for the use of the French Navy. There are prohibited zones for anchoring due to presence of submarine cables, marked on chart.

RESTRICTIONS There are 2 entry channels to the port. The South channel, depth 3.6 m. is used exclusively by local fishing boats. The West channel is marked by the alignment of Kerbel Light and Lohic Light. The depth in this channel is 6.25 m. Both channels are very well marked.

Traffic signals are hoisted at Port Louis Citadel as follows: Red flag or red light – entry prohibited. Green flag or green light – exit prohibited. Red over green flags or lights – port closed.

HEALTH: Pratique given by Customs Officers who board on arrival. If any case of suspected disease on board or any reason why vessels should not receive free pratique, Master should radio Agent before arrival, advising full details.

RADIO: Use local station Radio Conquet or Radio Saint-Nazaire.

TUGS: 2 tugs up to 700 h.p. – 3 tugs up to 200 h.p. They belong to the French Navy.

BERTHING: Kergroise Quays, 568 m. berthing length can accommodate vessel up to 220 m. length, draft 7.50 m. at the Northern part of the quays. Draft 7.2 m. at the Southern part of the Quays. Quays are being dredged to a projected draft of 9.0 m. in the Northern part.

7 cranes in service including 16-ton crane.

TANKERS: The oil jetty is 112 m. long and can accommodate tankers up to 180 m. length, max. draft 10 m.

FRESH WATER: Can be supplied from the quays at Kergroise and at the Oil Jetty. Rate 10 t.p.h.

REPAIRS: Minor deck and engine repairs can be carried out. Slipways can accommodate 4 fishing boats at the same time. There are 3 dry docks the largest of which is 186.20 m. long×26.33 m. wide.

MEDICAL: All facilities available. Local maritime and civil hospitals.

IDENTIFICATION CARDS: Crewmen going ashore should carry passport or identity card.

CONSULS: Norway, Denmark, Netherlands and Sweden.

TIME: GMT plus 1 hour – no alterations.

HOLIDAYS: New Year (1st January, no labour available); Easter Sunday (possibility of labour with overtime); Easter Monday (no labour available); Labour Day (1st May no labour available);

Ascension Day (possibility of labour with overtime); Whit Sunday (possibility of labour with overtime); Whit Monday (no labour available); National Day (14th July no labour available); Assumption Day (15th August no labour available); All Saints' Day (1st November, no labour available); Armistice Day (11th November, possibility of labour with overtime); Christmas Day (25th December, no labour available). N.B. Every Sunday and day marked "possibility of labour with overtime" can be worked at the rate of 100%.

POLICE/FIRE/AMBULANCE: Police 21 19 16; First Aid 17; Ambulance (97) 65.33.44; Fire 18.

AUTHORITY: Ingenieur des Travaux Publics de l'Etat, Ponts et Chaussees.

AGENT: See "Paris".

MARSEILLES: 43.18 N. 05.25 E. (See Plan Book)

(a) Old Port to Estaque *(b)* Port de Bouc/Lavera/Caronte/Etang-de-Berre *(c)* Fos

(a) OLD PORT TO ESTAQUE

DOCUMENTS:
- Ships Register.
- Declaration of Health.
- 3 Crew Lists.
- 2 Provisions Lists.
- 2 Lists of Passengers in Transit.
- 2 Lists of Passengers disembarking.
- 1 List of Ports where cargo is loaded for Marseilles.
- Cargo Manifests and Bills of lading.
- 1 List of Crew Personal Effects.

PILOTAGE: *Arrival:* Contact port authority by VHF on Channel 16, changing to Channel 12. M.W. Station, call on 2049 kHz. Station on 1933 kHz. ("Marseille Port") Compulsory. 21 pilot launches, mostly painted black, wooden hulls with white anchor insignia on the bow.

Contact pilot station and pilot boats by VHF Channel 8.

Southern Entrance: Pilot boards between "Le Frioul" and "Chateau d'If" island. Max. recommended draft 27 ft. in good weather.

Northern Entrance: Pilot boards at Estaque roads. In case of strong N.W. winds or for all deeper draft vessels the Northern entrance is preferred.

Vessels anchoring in roads without a Pilot will still incur full pilotage fee.

On departure, 15 to 30 minutes notice sufficient to order Pilot and tugs.

ANCHORAGE: Estaque Roads.

MAX. SIZE: Draft dependent on berth depth up to max. of 47 ft. 6 in.

HEALTH: Free pratique automatic vessels coming direct from continent or Italy and Q flag not to be flown. From other countries – including Spain and Portugal – usual procedure applies. Unless special arrangement for passenger liners free pratique not given by radio also practice issuing Health or Custom clearance on sailing now discontinued.

RADIO: Within 150 miles Marseilles Radio/FFM – otherwise St. Lys/FFL.

VHF: Port Authority on Channel 16, 6, 12 and 30.

TUGS: About 40 tugs available, from 250 to over 3,000 h.p. Ship's lines normally used.

BERTHING: When specific side alongside berth required. Agents radio Master prior arrival also advise Pilot. Otherwise side alongside at discretion Master after conferring with Pilot.

Berth No.	*Usable Berthing Length (m.)*	*Max. Permissible Draft (m.)*	*Remarks*
96	105	8.00	Ro/Ro berth
95	104	7.80	
94	105	7.00	Ro/Ro berth
92	143	7.60	Ro/Ro berth being built during 1978 – berth 93 will disappear.
91	130	7.40	
90	130	7.20	Ro/Ro berth
88	155	6.90	Ro/Ro berth
87	130	8.00	Ro/Ro berth
86	131	8.00	
84	147	8.00	Ro/Ro berth
83	135	8.50	
82	135	7.75	Ro/Ro berth
81	140	7.60	Ro/Ro berth
80	117	9.00	Equipped with Ro/Ro pontoon
79	117	8.80	
78	116	9.00	
77	116	9.00	
76	117	9.00	
75	117	9.20	
74	117	9.00	Ro/Ro berth
70	132	9.75	Ro/Ro berth and grain berth
69	131	9.75	
68	125	9.00	Equipped with Ro/Ro pontoon
67	125	8.10	
66	125	6.90	Ro/Ro berth
65A	89		Service berth
65	138	8.00	Ro/Ro berth
64	137	8.00	
63A	102	6.70	Waiting berth
63	127	7.00	Ro/Ro berth
60	*	8.80	*Ro/Ro berth in middle of dock
59	173	8.00	Ro/Ro berth
58	153	9.60	Banana Terminal
57	154	9.60	Ro/Ro berth
54	149	9.80	Ro/Ro berth
53	149	10.00	
52	120	9.50	Waiting
51	115	7.50	
50	115	7.00	Ro/Ro berth
		7.40	
49	146		Service and marine fire brigade
48	135	8.20	Heavy lift berth
47	135	9.50	
46	106	8.50	Waiting
45	129	7.00	
44	130	7.50	Specialist paper berth
43	204	8.50	Oil seed and cake berth
42	146	7.00	Ro/Ro berth
41	146	7.00	
40	167	9.50	Ro/Ro berth being built
36	133	9.00	Pinede being remodelled
35	100	7.20	Service (being fitted out)
34	125	8.70	
33	125	8.50	
32	130	8.40	
31	130	6.00	Animals
30	185	9.75	Specialist cereal berth
29B	126	6.00	Service
29A	120	7.50	Service
29	151	8.00	Ro/Ro berth
28	151	8.50	
27	150	9.00	
26	151	9.00	
25A	100	7.00	
25	153	11.00	
24	154	11.00	
23	134	9.50	Waiting
22	152	10.50	
21	152	10.50	
20	152	10.50	Sugar
19	151	10.00	
14	222	9.70	Aluminium ore
13	171	10.00	Refrig. store
12	171	10.00	
11	171	10.00	Cruise ship terminal
10	171	10.50	
8	157	10.70	
7	157	10.00	
6	177	9.40	
5	177	9.70	
4	142	9.65	
3	142	9.80	
2	143	9.80	
186	162	14.50	
185	162	14.00	
184	162	14.00	
183	162	14.50	
182	161	14.20	
181	162	14.00	Ro/Ro berth
163	no limit	at present 11.50 to be 14.00	Naval repair berth
161	50	2.50	Berths for indivisible loads
160	104	9.00	Naval repair berth
157	154	12.00	Ro/Ro berth
156	154	12.00	Bulk liquid berth
155	154	12.00	
154	154	10.50	
153	154	11.60	
152	155	11.60	Ro/Ro berth
151	137	12.00	MAVRAC quay (being built
150	136	12.00	– in service end 1978
149	105	12.00	
148	105	11.00	Ro/Ro berth being built – in service end 1978
144	173	10.50	

Berth No.	*Usable Berthing Length (m.)*	*Max. Permissible Draft (m.)*	*Remarks*
143	90	9.50	Deballasting berth, max. size 200,000 d.w.t.
145	70	4.70	Car quays
146	105	4.70	
147	133	4.70	
170	132	4.70	
190	450	10.60	Floating repairs quay
131	215	11.00	Stationary naval repairs
130	215	11.00	
129	216	11.00	Naval repairs – engine testing
128	127	8.50	Waiting berth
127	170	8.50	Waiting berth
126	170	8.80	Naval repair and tests
125	170	9.20	
124	170	9.20	
123A	78		Service – lighthouses and buoys
123	150	10.30	Naval repair being dredged to −12 m.
122	150	10.20	
121	151	10.20	
120	151	10.30	
119	151	10.00	
119A	100	6.65	Naval repairs
118	160	10.00	Naval repairs
117	160	10.00	
116	160	10.50	
115	160	10.50	
115A	85	6.50	Naval repairs
114A	75		Service
114	151	10.50	Naval repairs
113	151	10.50	
112	151	10.50	
111	151	10.50	
110	151	10.50	
109	152	10.50	Multi-purpose berth
108			
107	355		Service
106A	70	5.70	Wine traffic
106	120	4.50	
105	120	6.00	
104A	190	5.60	Damaged quay
104	100	6.00	
103	139	4.30	Service berth
102	139	4.70	Waiting berth
101	139	3.50	
100	139	3.50	
99	139	3.50	
98	450	8.00	Fixed point – engine testing

CRANES: Quayside cranes, including mobile cranes.

44 cranes – 3-5 tonne capacity.
87 cranes – 6 tonne capacity (4 of which are mobile).
14 cranes – 6-12 tonne capacity (8 of which are mobile)
4 cranes – 12 tonne capacity (1 of which is mobile).
1 cranes – 35 tonne capacity (mobile).

13 drydock cranes, largest has a lifting capacity of 50 tonnes. 2 floating cranes for public use, owned by the Port Authority, capacities 90 tonnes and 150 tonnes. Their are also 3 privately owned floating cranes, largest has a capacity of 70 tonnes.

BULK HANDLING FACILITIES: Cereals.

Pinede Dock: Berth No. 30. Storage: The Madrague Silo, owned by the Societe Fonciere et Commerciale du Silo de la Madrague, has a capacity of 30,000 tonnes in 143 cells. The Silo is connected to the berth by 420 m. (1,378 ft.) of covered conveyors. The silo is outside the port area.

Grande Joliette Dock: Berths No. 69 and 70. Storage: The silo, owned by the Marseilles Port Authority, is within the port area and has a capacity of 22,000 tonnes in 99 cells. it is equipped with 4 covered conveyors, 2 of which are reversible, thus allowing the export of cereals from the silo.

There is also a bulk warehouse here, within the port area and owned by the Port of Marseilles Authority, which has a total capacity of 14,000 tonnes, made up of 3 cells of 2,500 tonnes and 4 cells of 1,600 tonnes. The warehouse is connected to the silo at Arenc – which belongs to the port – by suction devices and conveyor belts.

Grain, Copra:

National Dock: Berth No. 43. Storage: Shed 6B has a capacity of between 12,000 and 18,000 tonnes for types of grain, on the first floor, and 6,000 tonnes on the ground floor. This shed is on the quayside.

Minerals in Bulk:

National Dock: Berths: No. 47 and 48. Specifically for bulk traffic, handled by bucket-cranes. Storage: 4,000 sq. m. (43,040 sq. ft.) in the open, beside the East Quay.

President Wilson Dock: Berth No. 14. Allocated specifically for Alumina. Storage: 2 silos, with a total capacity of 11,000 tonnes, constructed by and belonging to Pechiney Cie. and Ugine Cie., to facilitate the import/export of dehydrated alumina in bulk.

Leon-Gourret Dock: Berth No. 8. Allocated specifically for bulk traffic that can be handled by grab-bucket. Storage: An open area of 4,000 sq. m. (43,040 sq. ft.) at the quayside; suitable for import/export.

Liquids in Bulk:

Mourepiane Depot: Berth No. 156. For vegetable oils and chemicals. Storage: The private company, Marseille Vrac, which operates this depot, has 32 vats of 125 to 1,640 cu. m. (4,412 to 57,892 cu. ft.), with a total capacity of 24,500 cu. m. (864,850 cu. ft.). There are pipelines to the quay for discharging tankers.

Import and Export: The major import is vegetable oil; export is chemical products in bulk.

Sugar:

President Wilson Dock: Berths No. 19 and 20. Storage: The silo, which has a capacity of 30,000 cu. m. (1,059,000 cu. ft.) is within the port area and is owned by the Port of Marseilles Authority. Sugar is discharged by bucket-crane into hoppers which feed the conveyor belts to the silo. The total conveyor capacity is 250 tonnes per hour.

BRIDGES: Turning bridge near Southern end of port – Pont d'Arenc – opens on requests. Bridge further North – Pont de la Pinede – opens: 0600 to 2200 hrs. twice each hour between 5 minutes before the hour and 5 minutes afterwards, and between 5 minutes before half hour and 5 minutes afterwards. Open continuously 2200 to 0600 hrs.

STEVEDORES: Enable Agent order gangs important obtain in good time accurate ETA from vessels. Latest times to order gangs; normal and deferred shifts 0530 hrs. same morning – night shift 1600 hrs. same day – Saturday and Sunday, 1600 hrs. Friday. Failure give precise ETA may result in ship losing 12/24 hours also cost gang waiting time includes waiting vessel's arrival – free pratique – opening/closing hatches – rain – shifting cargo or dunnage – crane or derrick break-downs – time lost between finishing and end of shift. Work can be arranged on following official holidays – New Year's Day, Easter and Easter Monday, Whitsun, 14th July, 15th August, 1st November, Christmas Day, 1st May holiday when no work takes place, Stevedoring hours (normal shift) Monday to Saturday, 0630–1310 hrs. and 1320–2000 hrs. (Two shifts). Sunday, 0630–1310 hrs., if required one shift 0800–1130 hrs. and 1300–1620 hrs. Night work if required 2200–0400 hrs. One hour overtime may be worked before 0630 or after 0730 hrs. No work allowed Sunday night. All necessary gear supplied by stevedores except rain tents which vessel must supply.

MEDICAL: Yellow fever inoculations only in hospital. Tuesdays and Friday. Masters to advise by radio prior arrival if medical attendance required aboard.

TANKERS: See "Port de Bouc" and "Fos".

DENSITY: About 1028.

FRESH WATER: Can be obtained from hydrants or quays or from water-boats. When delivered by barge, min. quantity invoiced is 50 tons. Preferable order prior arrival to avoid delays. Min. pumping rate 50 t.p.h.

FUEL: Ordinary fuel, also fuel oil max. 1000 secs., Diesel and Gas oil. Deliveries by barge only.

FIRE PRECAUTIONS: Special harbour fire-fighting corps, with two fire-fighting Vessels.

DEVELOPMENTS: See "Fos".

WATCHMEN: Available but not compulsory.

HATCHES: Crew allowed open and close.

SHIP CERTIFICATES: On first call Registered Tonnage Certificate; thereafter not required unless Gross/Net tonnages changed.

CUSTOMS ALLOWANCES: About 200 cigarettes and limited amount spirits per man.

CARGO GEAR: No additional requirements; all gear supplied by stevedores except rain tents.

IDENTIFICATION CARDS: Not required.

CONSULS: The following countries are represented in Marseilles:

Algeria
Argentina
Austria
Belgium
Bolivia
Brazil
Canada
Colombia
Costa Rica
Cuba
Cyprus
Denmark
Dominica
Ecuador
Egypt
Finland
Great Britain
Greece
Guatemala
Haiti
Honduras
Iceland
Israel
Italy
Ivory coast
Japan
Lebanon
Liberia
Madagascar
Mauritania
Mexico
Morocco
Netherlands
Nicaragua
Norway
Panama
Peru
Philippines
Portugal
Senegal
Spain
Sweden
Switzerland
Thailand
Tunisia
Turkey
U.S.A.
U.S.S.R.
Uruguay
Venezuela
West Germany
Yugoslavia

REPAIRS: Most repairs and overhauls possible. Pre-advice recommended.

DRY DOCKS:	*Working lengths*	*Entry width*
No. 1	561 ft.	63 ft. 3 in.
2	441 ft. 6 in.	56 ft. 8 in.
3	326 ft.	51 ft.
4	262 ft. 8 in.	44 ft.
5	400 ft.	41 ft.
6	410 ft.	50 ft. 8 in.
7	656 ft.	80 ft. 8 in.
8	1,049 ft. 7 in.	164 ft.
9	820 ft. 6 in.	121 ft. 3 in.
10	1,525 ft.	276 ft. 11 in.

Depth 9.50 m. (31 ft. 2 in.)

POLICE/FIRE/AMBULANCE: Police 91 90 40; Ambulance 17; Fire Brigade 18; Special Port Fire Brigade 50 36 70 and 62 36 58.
GAS FREEING STATION: Suitable for tankers up to 28 ft. draft.
The Station is equipped with:

Boilers able to supply 34 tons of steam per hour.

A pumping station supplying hot water for cleaning, fresh water for ballast, and which is also used for transfers.

A separator for the discharge of dirty ballast able to work at 1,200 cu.m. per hour.

Two receiving tanks of 2,000 cu.m.

One tank of 500 cu.m. for treatment and 1 for subsequent storage with a capacity of 2,000 cu.m.

One extractor for removal of all traces of oil including sludge.

The Station can supply all the necessary fluids for cleaning and gas freeing (salt water, hot and cold water, fresh water, compressed air and electric current.)

From the vessels the installation receives dirty ballast and water which goes through separators.
AUTHORITY: Le Port Autonome de Marseille.

AGENTS: Jolasry (France), 6 Boulevard de Dunkerque. Tel. 91.90.86. Telex. 440821. Cables: Jolasry.

(b) PORT DE BOUC, including Port de Lavera 43.23 N. 05.00 E., Port de Berre 43.27 N. 05.10 E., Port de la Mede 43.24 N. 05.07 E. Caronte 43.24 N. 05.02 E.

DOCUMENTS: On arrival:
1 Cargo Manifest or manifest in ballast.
Certificate of open spaces occupied by cargo in cu. ft. or cu. m. or in registered form if shelter deck.
Bill of Lading.
Ship's Register (if required).
6 Crew Lists (8 if Spanish or U.S.S.R. ship or ship bound for these countries).
3 Passenger Lists.
Health Declaration.
Deratisation Certificate.
Bunker's Supply (3 forms).
1 Crew Declaration of Personal effects – cameras, binoculars, radios, cigarettes, tobacco, etc. If on inspection articles or quantities not in conformity or in excess, Master held responsible, articles removed and heavy fines imposed.

PILOTAGE: Call "Port de Bouc Control" on Channel 16. Channel 12 for traffic. Pilot must be taken to enter Port de Bouc, Fos and Port St. Louis du Rhone. Contact by Marseilles Radio or pilot boat VHF (Channel 16 for calling, Channel 14 for traffic). Pilot boards in the Roads between 2 and 2.5 miles S.W. of Bouc Tower or further out if required, for entering Port de Bouc and Fos. Motor launch black hull, white cabin, white anchor on bow, "H" flag.
ANCHORAGE: It is recommended to ask for Pilot before anchoring in outer Roads to avoid forbidden places for ships bound for Port de Bouc and Fos.
RESTRICTIONS: No entry restrictions for Lavera. Night transit of Caronte Canal to Etang de Berre forbidden to tankers above 6,000 g.r.t. Transit of Caronte Canal to Etang de Berre is forbidden for vessels over 180 m. (598 ft.) overall and over 24 ft. draft.
MAX. SIZE: (Coastal berths not included).

Lavera: *Berth*	*Max. draft*	*Max. LOA*
A4	36 ft. 09 in.	700 ft.
B	37 ft. 06 in.	880 ft.
C	39 ft. 00 in.	880 ft.
D	39 ft. 00 in.	880 ft.
E	40 ft. 00 in.	880 ft.
F	42 ft. 00 in.	880 ft.
G	41 ft. 00 in.	880 ft.
La Mede:		
4	17 ft	363 ft.
E	24 ft.	358 ft.
W	24 ft.	575 ft.
Berre:		
A	24 ft.	590 ft.
B	24 ft.	590 ft.
Salins	24 ft.	577 ft.

HEALTH: Pratique given by Customs officers who board on arrival. In case of suspected disease on board, notify Agents by radio before arrival.
RADIO: Within 150 miles traffic through Marseille Radio/FFM, otherwise St. Lys (FFL).

Port de Bouc Radio (Harbour Office) VHF used for navigation purposes only – Channel 16 for call, Channel 12 for traffic.
TUGS: Eleven tugs available from 90 to 1,800 h.p. Normally join vessel in entrance channel off Port de Bouc. Only ship's lines used.
BERTHING: Lavera: 9 berths for ocean going ships in 4 docks. Length varying between 210 m. (689 ft.) and 325 m. (1,066 ft.). Dredged depth varying between −12.00 m. (39.36 ft.) and −13.50 m. (44.28 ft.). 8 berths for coasters and barges. Length varying between 210 m. (689 ft.) and 325 m. (1,066 ft.). Dredged depth varying between −4.00 m. (13.12 ft.) and −7.00 m. (22.97 ft.).

2×12 tonnes publicly-owned mobile cranes. Lavera harbour has been specifically designed to handle refinery products and the discharge of oil tankers.

Each berth has flexible pipe connections, with articulated metal arms, supported by special cranes. The type of pipework depends on the product handled (crude or refined) and is connected to the storage tanks of:—

C.F.R.
Esso and C.R.S.F.
S.F.P. Refinery – B.P. at Lavera
The maritime terminal of S.P.L.S.E., which supplies the Esso Refinery at Fos.

Berth H has been designed to handle the loading and unloading of propane and chemical products.
Port-de-Bouc:
Leque Quay (for tugs). Length 80 m. (262 ft.). Dredged depth – 6.00 m. (19.68 ft.).
Somecina Quay (for agglomerates). Length 300 m. (984 ft.). Dredged depth – 6.00 m. (19.68 ft.). 1×6-tonne crane.
Caronte: This harbour specialises in the import/export of phosphates, and is operated by a private company, the Et. Maritime de Caronte (E.M.C.).
Caronte Quay: (specifically for loading barges) – 5 berths: Length 650 m. (1,804 ft.). Dredged depth – 9.00 m. (29.52 ft.). 2×15-tonne gantry cranes; 3 tilting platforms; 2×5-tonne cranes; 3×8-tonne cranes; 2×12-tonne cranes. Warehouse for phosphates: capacity 32,000 tons. Open storage area of 12 ha. (29.64 acres).
Verminck Quay: Length 153 m. (502 ft.). Dredged depth – 8.00 m. (26.24 ft.).
Kuhlmann Quay: Length 140 m. (459 ft.). Dredged depth – 8.00 m. (26.24 ft.). 1×6.5-tonne crane, having a reach of 18.5 m. (60.7 ft.) Sheds with a capacity of 4,000 tonnes; open storage on the quay of 4,000 sq. m. (43,040 sq. ft.).
Etang de Berre:
Port of La Mede: This port is owned and operated by Cie. Francaise de Raffinage (C.F.R.). 2 berths for ocean-going ships. Dredged depth −8.00 m. (26.25 ft.). A berth of 50 m. (164 ft.) in the Etang de Berre, some distance from the shore, is suitable for mooring 2 ships. The total available length for mooring in this harbour is 240 m. (787 ft.). 2 berths for coasters: Dredged depth: −3.50 m. and −6.00 m. (11.48 ft. and 19.68 ft.). 2 berths for barges: Dredged depth −2.30 m. (7.54 ft.).

The berths are connected to the storage tanks of the Cie. Francaise de Raffinage (C.F.R.) by pipelines, of various diameters, laid under water.

The storage tank capacity of the refinery of the Cie. Francaise de Raffinage is 2,256,000 cu.m. (79,636,800 cu.ft.).
Port of La Pointe de Berre: This port is owned and operated by Cie. Shell Berre. 3 berths for ocean-going ships: 2 berths with a length 150 m. (492 ft.) Dredged depth −8.50 m. (27.83 ft.). 1 berth with a length 130 m. (426 ft.). Dredged depth −8.50 m. (27.83 ft.). 1 berth for coasters: Dredged depth −4.80 m. (15.74 ft.). 1 berth for barges: Dredged depth −3.80 m. (12.50 ft.).

Capacity of the depot at the Port of Pointe de Berre is 171,000 cu.m. (6,036,000 cu.ft.). Capacity of the storage Shell refinery is 2,084,000 cu.m. (73,565,200 cu.ft.). Total storage capacity at Berre=2,255,000 cu.m. (79,601,500 cu.ft.).

The berths are connected to the storage tanks of the Cie. de Raffinage Shell Francaise S.A. by pipelines, specifically designed for the products they handle.
BRIDGES: 1 railway bridge and 1 road bridge across Caronte Canal each having special times for opening. Ships of less than 21 m. height clearance may pass below the railway bridge. Motorway bridge over Caronte Canal with 44.60 m. clearance.
STEVEDORES: To enable Agent order gangs important obtain accurate ETA between 24 hours and 48 hours in advance. 2 shifts 0500 to 1300 hrs. and 1300 to 2100 hrs. normally 6 days a week. Confirmation to be made at 0900 hrs. for afternoon shift, and 1700 hrs. for next day morning.
MEDICAL: All hospital and medical facilities. Yellow fever inoculation made by appointed doctors. Masters to advise by radio prior arrival if medical attendance is required on board.
TANKERS: Each of the large berths, North and South, A, B, C, D, E, F, G, is fitted with lines for crude oil and all refined products. Pipeline system leads to distributors (7 for refined products, 2 for crude oil) connected to neighbouring refineries, and to South European pipe-line (crude oil only).

Terminal hose handling: Each berth is fitted with metal gantries hanging up flexible hoses for ship's connection. They are handled with compressed-air winches and ship's boom which should be rigged before arrival.

Flexible hoses diameter: crude oil, four 12-in.; fuel oil (or crude), two 12-in.; white products, one 8-in.; ballast (or crude), one 12-in.; bunkers, one 8-in.; liquefied gas, one 4-in.; special products, one 4-in.

Deballasting installation: Tankers may pump out their ballast at all berths – except tank-washing water and slops.

Also see "Berthing".
DENSITY: About 1028. Variable in Canal de Caronte and Etang de Berre owing to discharge of hydraulic plant of St. Chamas.
FRESH WATER: Available generally by pipes and hoses at the berths. Water barges available from Marseille.
FUEL: By barges for cargo ships and vessels in the Roads. Tankers at Lavera refuel by pipe-line at the berths. All grades available.
FIRE PRECAUTIONS: Oil Harbour is fitted with a system of 203 mm. (8 in.) or 254 mm. (10 in.) sea water pipes at 5 bars permanent pressure. It may be increased by pumping station up to 9 bars, and supply 500 cu. m./h. Each wharf has 5 fire hydrants with first-aid equipment: fire hoses and spray nozzle, foam nozzle with powder

cans. If fire breaks out on a ship, the hose handling gantries are protected by a screen of sprayed water. All fire equipment and installation are painted red.

There is a special fire-fighting Corps with fire vessel. Call for firemen 06.21.29 or 26.28.37. In case of fire call Port de Bouc Control – phone 05.22.25 or 06.63.39 or VHF Channel 16.

GANGWAY/DECK WATCHMEN: Available but not essential.

OPENING/CLOSING HATCHES: Always by crew.

CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes every 5 days; wine/spirit: limited amount per man.

IDENTIFICATION CARDS: Seamen going ashore should carry passport or identity card.

CONSULS: Norwegian, Swedish, Danish and Spanish consuls at Port de Bouc. Others at Marseille.

REPAIRS: Permission must be granted by Port de Bouc Harbour Master only.

DRY DOCKS: Nearest at Marseille.

REPATRIATION: All facilities for crew change and repatriation by railway or planes.

AIRPORT: Marignane Airport 40 km. and Nice Airport 230 km. (this last for SAS lines).

TIME: GMT plus 1 hour in Winter. GMT plus 2 hours in Summer.

HOLIDAYS: Same as "Marseille".

POLICE/AMBULANCE/FIRE: Police, 06.23.74 or 07.03.31; Fire, 06.21.29 or 06.28.37.

TELEPHONE: On application can be connected on board at Lavera. Telephone ashore in other places.

SHORE LEAVE: Allowed.

AUTHORITIES: Port Autonome de Marseille (Director General and Managers). Capitainerie de Port de Bouc (Harbour Master).

(c) FOS: 43.24 N. 04.53 E.

DOCUMENTS:

- 1 Cargo Manifest or Manifest in Ballast.
- Certificate of open spaces occupied by cargo in cubic feet or cubic metres, or in registered form if shelter deck.
- Bill of Lading.
- Ship's Register (if required).
- 6 Crew Lists (8 if Spanish or U.S.S.R. ship or ship bound for these countries).
- 3 Passenger Lists.
- Health Declaration.
- Deratisation Certificate.
- 3 Bunker Supply Forms.
- Declaration of crew personal effects, cameras, binoculars, radios, cigarettes, tobacco, etc.

If on inspection, articles or quantities not in conformity or in excess, Master held responsible, articles removed and heavy fines imposed.

PILOTAGE: Compulsory. Contact by Marseilles radio or direct to Pilot boat by VHF Channel 16 for calling, Channel 9 for traffic. Pilot boards in the roads between 2 and 2.5 miles S.W. of Bouc tower or farther out if required. Motor launch, black hull, white cabin, white anchor on bow, flying "H" flag.

Port de Bouc Port Control, call on Channel 16, Channel 12 for traffic. Pilot boat on Channel 16 for calling and Channel 14 for traffic.

ANCHORAGE: It is recommended to ask for Pilot before anchoring in outer roads to avoid prohibited anchorages.

RESTRICTIONS: When large tankers are proceeding in the Fos channel, other vessels' entrance may be delayed.

Access channel for very large vessels dredged to 22 m. over a width of 250 m.

MAX. SIZE:

The depth of the access channel is 78 ft. 08 in.

Tankers:

Berth	Max. draft
0	42 ft.
0 Bis	42 ft.
1	67 ft. 05 in.
2	62 ft.
3	73 ft.
4	Not yet in service.

Bulk Carriers:

Berth at Dock No. 1	Max. draft 49 ft.
Solmer (Private Quay)	Max. draft 61 ft.
Solmer (Export Quay)	Max. draft 39 ft.

LNG:

Gaz de France	Max. draft 31 ft. 01 in.

Container:

Container berth at Dock No. 2	Max. draft 42 ft. 06 in.

HEALTH: Pratique given by customs officers who board on arrival. In case of suspected disease on board, notify Agent by radio before arrival.

RADIO: Within 150 miles, traffic should be routed through Marseilles radio, FFM, otherwise via St. Lys. FFL.

VHF: Channel 16 for calling. Channel 12 for traffic and Channel 14 for pilot.

TUGS: Tugs normally join vessel in the entrance channel. Ship's lines are used.

GENERAL CARGO FACILITIES: (Heavy loads, cars, etc.)

Dock No. 1: One berth, length 250 m. (820 ft.); Depth alongside 14.00 m. One 3-6 tonne gantry crane. Roll-on/Roll-off berth under construction at Dock No. 3.

BULK HANDLING FACILITIES: Heavy bulk products:

Ore Quay (owned by the Port of Marseille Authority)

On Dock 1:

1 berth for ships up to 100,000 d.w.t. Length 900 ft. Dredged depth 16.00 m. (52.48 ft.)

2 20-tonne gantry cranes with a reach of 25 m. (82 ft.) with a capacity of 800 tonnes/hour. 1 fixed conveyor-transporter, with a length of 350 m. (1,148 ft.), the belts of which can move in either direction.

7 conveyor-transporters, with an individual length of 25 m. (82 ft.) which feed the mobile stock-piler.

Open storage area of 15 ha. (37.05 acres). Holding area for cargo in transit of 10,000 sq. m. (107,600 sq. ft.).

Ore Quay (Solmer)

On Dock 1:

2 berths for ships up to 180,000 d.w.t. Length 2,116 ft. Dredged depth 20.00 m. (65.6 ft.)

2 gantry cranes of 40 tonnes capacity. Conveyors which have a maximum discharge capacity of 2,000 tonne/hr. for minerals and 1,500 tonne/hr. for coal.

Storage area for ore, coal, limestone, scrap: 800,000 tonnes.

Finished Products:

South Dock (Solmer)

2 berths for the export of finished products. Length 420 m. (1,348 ft.). Dredged depth 42 ft. 06 in.

2×12 tonne travelling cranes.

3 sheds (sea, road and rail) with a capacity of 15 to 18,000 tonnes.

LNG Facilities:

At Dock No. 1. (Owned by Gaz de France).

Length available for berthing 328 ft. Depth alongside 39 ft. 06 in.

2 storage tanks, for LNG in the liquid phase (−160° C.), each with a capacity of 35,000 cu. m. (1,235,500 cu. ft.).

The pumps on the LNG Carrier discharge through articulated pipes of 300 mm. diameter (11.8 in.), 3 are specifically for discharge; one is to return the methane, in the vapour phase to the carrier.

After warming up from the liquid phase, with the addition of nitrogen to conform with the value in the French Gas Grid, the gas, in the vapour phase, is despatched by pipeline to the underground storage at Tersanne, 214 km. from Fos (134 miles), and to Marseilles and the Cote d'Azur.

CONTAINER HANDLING FACILITIES: *Dock No. 2:* Length 3,000 ft. Depth alongside 46 ft.

4×40 tonne gantry cranes, specially designed to transport 20 ft., 35 ft. and 40 ft. containers, each having a capacity of 20 to 30 containers per hour.

2×40 tonne gantry cranes – SNCF owned for wagon loading.

Terminal operators equipment includes: Sideloaders, carrytainers and straddle-carriers.

Open storage area of 16 ha. (39.5 acres). Servicing zone of 3 ha. (7.4 acres).

TANKERS: Chicksan loading/discharge arms fitted at all berths. Ballast discharge ashore through pipe-line. Tank cleaning slop or oil residue not accepted through shore line, but can be disposed of by barge from Marseilles. Possibility of crude cleaning for vessels with inert gas system if cleaning does not exceed time of discharging operations.

Berth	*Length of Quay*	*Depth Alongside*
0	295 ft.	42 ft. 07 in.
0 Bis	295 ft.	42 ft. 07 in.
1	791 ft.	70 ft. 05 in.
2	443 ft.	64 ft. 07 in.
3	791 ft.	77 ft. 01 in.
4	492 ft.	55 ft. 08 in. (Not in service)

FIRE PRECAUTIONS: A special fire fighting corp. operates at Fos. Tel. 05 04 40.

FRESH WATER: Available by pipe-line at all berths.

FUEL: Available by barge only.

MEDICAL: All hospital and medical facilities. Yellow fever inoculation made by appointed doctors. Masters to advise by radio, prior arrival, if medical attendance required on board.

REPAIRS: Ore berth can be used as a repairs berth when not required for cargo operations. Permission must be obtained for tanker repairs. No tankers repairs if vessel is not gas free. Permission given by Harbour Master only.

CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes every 5 days. Wine/Spirits: limited amount allowed per man.

CONSULS: Norwegian, Swedish, Danish and Spanish Consuls at Port de Bouc. Others at Marseilles.

AIRPORT: Marseilles/Marignane Airport about 60 km. distance.

TIME: GMT plus 1 hour in Winter. GMT plus 2 hours in Summer.

TELEPHONES: On application, telephones can be connected on board.

AUTHORITY: Le Port Autonome de Marseilles. Capitainerie de Port de Bouc (Harbour Master).

NANTES: 47.14 N. 01.34 W., inc. Donges 47.18 N. 02.04 W. and Montoir 47.18 N. 02.08 W.

(See Plan Book)

DOCUMENTS: See "St. Nazaire".

PILOTAGE: Compulsory for vessels over 225 ft. length on river Loire. Starts about 4 miles North of lighthouse of Le Pillier, on lightbuoy SN 3. Pilot boat on station day and night, if weather conditions permit, West of a line drawn between SN 3 lightbuoy and lightbuoy of "La Couronnee" about 2 miles N.N.E. If Pilot unable to come aboard, he may invite ship to follow his boat until they have reached a better shelter. Ships heading for one of Loire estuary ports should give ETA at least 24 hours ahead to Port Captain of Saint-Nazaire. Approximate time of arrival at SN 3 buoy, the further destination and speed should be given. VHF contact can be made direct with St. Nazaire Pilot boat or "Estuaire de la Loire" Pilot station.

ANCHORAGE: When Pilot service withdrawn, anchor near SN 3 lightbuoy or in "Rade des Charpentiers". In rough sea ships heave to off harbour. In case of doubt contact pilot boat by VHF or phone. Sometimes Pilot taken aboard on SN 3 is relayed by another who will board near the outer port of Saint-Nazaire to bring ship upstream. It is not allowed to moor before and below quay Emile Cormerais and Chevire Power Station Embankment (cables).

MAX. SIZE: Nantes: max. length 600 ft., breadth not limited, draft 29 ft. 4 in.

Donges: max. length 760 ft., breadth 116 ft., draft 41 ft. 8 in.

RADIO: Stations at: Saint-Nazaire; Brest-le Conquet and Bordeaux; Arcachon.

RADAR/VHF: Radar, none. VHF, Donges Port Operations Network—European frequencies.

TUGS: Nantes: 3 "Abeille" tugs 500 to 700 cv. Donges and St. Nazaire: Tugs are provided by "Union des Remorqueurs de l'Ocean" at Saint-Nazaire (2,000 h.p.); also "Les Abeilles".

BERTHING: Nantes: Vessels may be moored with bow facing up or downstream. During heavy flood periods, however, bow to face upstream. Donges: Mooring of vessels to the docks No. 0, 1, 2, 3 is performed with ship's ropes. On docks No. 4, 5 and 6, Port Authority use own steel cables to which ship is fastened in supplement to her own ropes.

Montoir: Port Authority use own steel cables to supplement ship's ropes.

BRIDGES: The first bridge on the estuary is upstream of Nantes.

STEVEDORES: Available.

MEDICAL: Facilities available at any time.

BULK CARGO FACILITIES: Between St. Nazaire, Donges and Montoir, berths equipped to handle bulk carriers up to 40,000 tons, subject to channel draft.

TANKERS: Channel to Donges 41 ft. 8 in. Depths, Berth 0 and 1 less than 18 ft.; Berth 2, 21 to 24 ft; Berth 3, 28 to 31 ft.; Berth 4, 32 to 39 ft.; Berth 5 over 39 ft.; Berth 6 over 40 ft. Pipes: according to the berths and products, diameters from 100 m/m to over 850 m/m (crude — Berths 4, 5 and 6).

Berth No. 6 can accommodate tankers up to 200,000 d.w.t., part loaded subject to channel draft.

Donges: Berths Nos. 5 & 6: To reduce the time of mooring a special mooring gang can be put at Master's disposal for arrival and departure. Arrangements must be made 48 hours in advance of this service. Permanent watch on VHF Channel 16 is recommended.

Crude connections: No. 5 Berth 1×12 in. Chicksan arm, 12 holes type 150 pounds. No. 6 Berth 5×12 in. Chicksan arms, 12 holes type 150 pounds. Reducers available, notice required prior to arrival.

Bunkering Lines: No. 5 Berth 8 in. Chicksan arm with 6 in. connection. No. 6 Berth, 6 in., 8 in. or 12 in.

Drinking water available at both berths.

Telephone: Placed aboard as soon as vessel berths. The vessel is connected both to the Post Office and Elf France Refinery. No. 5 Berth – Tel. No. 45.71.99. No. 6 Berth – Tel. No. 45.70.79.

Mobile crane available for hire for loading stores, provisions and spares. Request to be made upon arrival by Agent to Harbour Master or Port Authority Workshop.

There is a Seaman's Club at No. 4 Berth for crew and families, equipped with restrooms and accommodation.

FRESH WATER: Available on docks in Donges, Montoir, Saint-Nazaire and Nantes.

FUEL: Available in any grade or viscosity. Advance notice of at least 2 days must be given if vessel has to bunker on Saturday or Sunday. Otherwise, delivery within 36 hours by barge.

FIRE PRECAUTIONS: Usual precautions for tankers in neighbourhood of refineries; no fire, no smoking. Ground wire for ship.

DEVELOPMENTS: A terminal for the reception of the largest liquified gas – carriers in the world (125,000 cu.m.) is foreseen at the Port of Montoir. Later a terminal for containers will complete these facilities.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Done by crew.

IDENTIFICATION CARDS: Not needed.

CONSULS:

Algeria, 57 rue du General Buat, Tel: 74.38.19
Belgium, 4 bis, place du Sanitat, Tel: 71.57.10
Brazil, 2 place Roger Salengro, Tel: 47.72.71
Costa Rica: 2 Bd Albert Thomas, Tel: 73.60.15
Denmark, 15 rue Jules Launay, Tel: 46.31.50
Spain, Tel: 71.59.53
Finland, 15 rue Lhoumaille – 44340 Bouguenais, Tel: 75.53.08
Great Britain: 6 rue Lafayette, Tel: 71.08.50
Greece, 41, quai Fosse, Tel: 73.46.13
Holland, 1 rue Maurice Duval, Tel: 47.16.31
Norway, Cap 44 – BP 759 – 3 rue Marcel Sembat, Tel: 71.33.35
Portugal, 4 rue Gresset, Tel: 73.05.04
Sweden, 1 Rue de Norvege – 17000 La Rochelle, Tel: 35.58.36
Switzerland, 29, rue de Carcouet, Tel: 71.67.66
Tunisia, 3, rue Anizon, Tel: 71.10.52

REPAIRS: Very good facilities exist for all types repair work.

DRY DOCKS: Dry docks at Nantes for vessels under 4,500 tons.

AIRPORT: Good connections with French internal network (Air Inter) and also international mainly with stop-over in Paris. 4 daily flights to the capital. Direct flights to Bordeaux, Lyon, Toulouse, Brest, Le Havre, Lille, Laval, Limoges, Clermont-Ferrand, London, Geneva, Frankfurt.

TIME: Paris time GMT plus 1 hour; seasonal alteration.

HOLIDAYS: Most firms close in August. National Days: May 1, July 14, August 15, Nov. 11

POLICE/AMBULANCE/FIRE: Nantes and St. Nazaire: Police 17; Ambulance 18; Fire 18.

TELEPHONE ON BOARD: Arrangements are possible.

SHORE LEAVE: No restriction.

AUTHORITY: Port Autonome de Nantes-St. Nazaire.

AGENT: See "St. Nazaire".

NICE: 43.42 N. 07.17 E. (See Plan Book)

DOCUMENTS: Master required make declaration of entry at Port Office, Harbour Master's Office, Quai Entrecosteaux, where he must present to Authority (Commissariat du Port) Crew List and Passenger List. If coming from foreign port he is also required to furnish a Customs Declaration.

PILOTAGE: Compulsory for Nice-Villefranche Station and applies to ships of more than 50 m. length. Pilot station extends 3 miles from coast between meridians of left bank of Var river (07.12.5 E.) and Cap Ferrat. Request for Pilot made by Regulation Signals day or night or through radio station Grasse on 2321 kc/s. and 2182 kc/s.

ANCHORAGES: Approaches have no practical anchorage zones and it is preferable to proceed Villefranche approaches 1 mile distant which can offer sheltered anchorage for ships of all sizes.

MAX. SIZE: Port accessible to ships of 137 m. length and 6.50 m. draft.

RADIO: Grasse Radio Station. Ships call on 2321 kc/s. and 2182 kc/s. Meteorological reports on 2649 kHz broadcast at 0833, 1330, and 1745 hrs. Port Office on VHF Channels 16, 12 and 9.

TUGS: None.

BERTHING: 9 berths for merchant vessels. Ocean-going yachts desiring berth before entering Admiral Infernet and Lympia docks must ask Harbour Master's Office about available positions. At night, a notice fixed at entrance to Harbour Master's Office indicates berths to be occupied on following day by steamers and cargo vessels. These berths must not be occupied by ocean-going yachts.

STEVEDORES: Require (if possible) 24 hours notice in advance of arrival.

MEDICAL: No port doctor. In case of emergency tel. no. 18. Ambulance and doctor on call.

FRESH WATER: Available on all quays.

FUEL: Distribution by tank lorries.

FIRE PRECAUTIONS: Town Fire Service, tel. 18 and 86.72.96.

REPAIRS: Minor engine repairs possible at local yards.

AIRPORT: 5 km. from port.

EMERGENCIES: Ambulance, tel. 18 and 86.06.06; Police, 17.

TELEPHONES: Two lines on Traverse and Commercial Quays can be connected on board on request.

AUTHORITY: Harbour Master.

AGENT: See "Paris".

PARIS

AGENTS: Enquiries relating to agency at French ports may be addressed to Jolasry (France) S.A., 26, Avenue de l'Opera, Paris, 1er. Tel. 296 14-15. Telex: 210905 Paris. Cables: "Jolasry Paris".

PORT-VENDRES: 42.31 N. 03.07 E.

DOCUMENTS:

3 Crew Lists.
5 Passenger Lists.
2 Store Lists.
1 Maritime Health Declaration.
4 Cargo Manifests.
2 Bills of Lading.

Ship's Papers: Nationality Act, International Tonnage Certificate.

PILOTAGE: Three long blasts. ETA required for Agent, Pilot usually taken on outside unless in very bad weather.

MAX. SIZE: Max. length 150 m. max. draft 25-26 ft.

HEALTH: Usually Customs give free pratique. In event of suspected disease or fever on board must advise naval doctor.

RADIO: Marseille Radio (or St. Lys Radio) or Perpignan Radio.

TUGS: None available.

CRANES: 1 shore crane available only of 20 tons.

SPECIALISED CARGO-HANDLING FACILITIES: 3 roll-on/roll-off berths and 1 refrigerated warehouse 11,000 cu.m.

STEVEDORES: ETA to be given to Agent in order to arrange gangs (usual rate per day. 8 normal working hours). 200 tonnes per gang.

MEDICAL: Perpignan Hospital (30 km. away).

TANKERS: Berth for wine tankers with pipe-line.

DENSITY: Salt water.

FRESH WATER: Supplied by Chambre de Commerce, Port-Vendres.

FUEL: For small craft only, otherwise delivery by trucks.

CONSULS: Sweden.

DRY DOCK: 1 travelift for craft up to 150 tons.

SURVEYORS: Lloyds Sub Agent and Vessel's and Cargo Surveyors.

OPENING/CLOSING HATCHES: Normally to be carried out by crew (or as per charter party if any).

CARGO GEAR: Load/discharge effected by ship's gear.

GANGWAY/DECK WATCHMEN: Recommended if loading dangerous cargo.

CERTIFICATES: Load Line Certificate.
International Tonnage Certificate.
Deratisation Certificate.

CUSTOMS ALLOWANCE: See "Calais".

IDENTIFICATION CARDS: Only seamans book required.

REPAIRS: Minor repairs only.

AIRPORT: Perpignan Rivesaltes (30 km.)

TIME: GMT plus 1 hour in Winter. GMT plus 2 hours in Summer.

HOLIDAYS: As for whole France – cargo work can be arranged on those days as overtime.

POLICE/AMBULANCE/FIRE: Tel. 38 00 40 or five long blasts.

SERVICES: Workshop for small repairs, radio/radar repairs available, ship chandler for bound stores, laundry.

SHORE LEAVE: Crew members are allowed ashore.

AUTHORITY: Directeur du Port.

AGENT: See "Paris".

PROPRIANO: Corsica, 41.40 N. 08.54 E.

(See Plan Book)

DOCUMENTS:
3 Crew Lists.
3 Passenger Lists.
1 Provisions List.
1 Cargo List.
1 List of Articles (new and Customs-barred) in possession each crew member – cameras, binoculars, radios, cigarettes, spirits, etc.
1 Health Declaration.

PILOTAGE: Not compulsory.

ANCHORAGE: Outside port for cruise vessels.

MAX. SIZE: Draft 5 m.; length 160 m.

RADIO: Within 50 miles call Ajaccio Radio VHF Channel 16. Then connected over Channel 23 to telephone network.

TUGS: None available.

BERTHING: New Marina with 250 berths (June 1979) additional 200 berths (1980). Facilities include fresh water, electricity, telephone. Crane available for lifting pleasure craft. Engine repairs also possible.

STEVEDORES: 24 hours accurate ETA necessary for ordering gangs. No work on Sundays and official holidays.

CARGO GEAR: Only a few nets and slings available; all other gear must be supplied by ship. Ship's derricks used.

FRESH WATER: Available at very slow pumping rate.

FUEL: Available.

REPAIRS/CONSULS: None.

TIME: GMT plus 1 hour.

AIRPORT: Propriano Tavaria 6 km. Direct flights to Marseilles, Nice and Lyons in Summer. Daily connections Airport Campo del Oro/Ajaccio.

POLICE/AMBULANCE/FIRE: Tel. Gendermarie Propriano 76.00.17.

QUIMPER-CORNIQUEL: 47.58 N. 04.07 W.

DOCUMENTS:
Crew List.
Passenger List.
Customs Documents.
Port Health Documents.
Manifest of Cargo.
Stores on Board.
Ship's Papers.

PILOTAGE: Pilot Station, tel. 910640. Contact via Le Conquet Radio or St. Nazaire Radio.

If vessel's ETA changes, telephone either the Agent or the Pilot at least 3 hours before arrival.

The pilot boat is a small black launch, white bulwarks with anchor painted on bow of each side, white cabin at the stern, one mast.

Only one Pilot on duty, but will meet ship at the time given in their ETA. Pilot boards either on the bearing 346° with Lighthouse of Benodet and du Coq in alignment, or on the bearing 000° with Lighthouses of Benodet and Combrit in alignment. Vessel should come as near as possible to the entrance, Vessels are anchored at the port entrance, or in the river, and await the tide, or proceed directly to the port.

In case of bad weather, when the Pilot may not embark, vessel to follow the pilot launch on the bearing 346° up to Plage du Trez, where boarding is possible. Vessels at anchor awaiting Pilot should get under way to approach the pilot boat on the bearing 346° when they see the launch approaching.

ANCHORAGE: Depths of 11 m. in position with the Taro Tower, bearing 245°, distance 0.8 miles.

Depths of 6 m. in position with the Point of Combrit bearing 000°; distance half a mile.

Depth of 9 m., bottom sand and mud, in Du Trez anchorage at the mouth of the Odet.

RESTRICTIONS: Vessels arriving at night must anchor outside the port entrance. It is dangerous to enter the river at night as there are no lights, and the channel is restricted by yachts at anchor.

MAX. SIZE: At spring tides: length 78 m.; breadth 12 m.; draft 4.95 m. At neap tides: length 72 m.; breadth 12 m.; draft 3.40 m.

RADIO: The Port Superintendent requires 24 hours notice of arrival.

TUGS: No tugs available.

BERTHING: At one quay there is 226 m. length for coasters. One quay of 120 m. length for discharging sand. 3 cranes available.

TANKERS: There is a fuel/oil depot at Quimper-Corniquel supplied by coastal tankers from Donges. Max. draft for tankers at Quimper is 3.50 m. to 4.10 m.

FRESH WATER: 5 drinking-water hydrants situated on the quay, loading rate 12 t.p.h.

FUEL: Can be supplied by various companies from tanker lorries.

AIRPORT: Airport of Plugussan situated 5 km. from the port. 2 regular daily flights to Paris.

AUTHORITY: Ingenieur en Chef des Ponts Chaussees, Directeur Departemental de l'Equipement.

AGENT: See "Paris".

ROCHEFORT SUR MER: 45.56 N. 00.57 W.

For all general information refer to Tonnay-Charente.

MAX. SIZE: Max. permissible length: 115 m; breadth: 16 m. (ships must pass through a lock of 18 m. width).

Max. draft is 18 ft. at any tide, 21 ft. at Spring tides.

POLICE/AMBULANCE/FIRE: Police 17; Ambulance 99.40.69;

AUTHORITY: Bureau du Port.

ROUEN: 49.28 N. 01.04 E. **(See Plan Book)**

DOCUMENTS: Cargo Manifest or Manifest of Ballast, Certificate of Cargo Space. Bills of Lading. Ship's Register. 6 Crew Lists. 3 Passenger Lists. Health Declaration. Derat Certificate or Exemption. Declaration of Crew Personal Effects.

PILOTAGE: Vessels proceeding to the ports of Rouen and Honfleur are met by pilot boat on La Carosse Roads (Rade de La Carosse). Pilotage is compulsory between the mouth of the Seine and Rouen. Vessels of 55 m. length and less can be exempt from the obligation for the lower sector of the river, and vessels of 45 m. and less for the upper sector, on condition that such vessels be equipped with suitable radar, with VHF sets and able to speak French, and that they are not carrying dangerous goods. Each vessel taking a Pilot for the downriver stage between La Carosse Roads and Villequier, or vice-versa, and a Pilot for the upriver stage between Villequier and Rouen, or vice-versa.

The following signals should be made for summoning a Pilot on La Carosse Roads: By Day: flag "G" of the international code of signals. By Night: in morse by signalling lamp. Failing this, the vessel should hoist her national ensign at the foremasthead.

The following additional signal can be made when arriving on La Carosse Roads: 5 prolonged blasts (– – – – –) to call attention to pilot boat.

Vessels leaving harbour or shifting berth should apply for a Pilot to the Pilotage office, 21 Avenue du Mont-Riboudet, Rouen (tel: 71-68-50)

The Rouen pilot boat keeps a telephonic watch during the following period of all tides: from low water Le Havre until 4 hours after high water.

Since the pilot boat's watch is not permanent, Masters wishing to enter into direct contact with her are recommended to signal their position during the high water prior to that by which the vessel expects to enter the roads.

TUGS: Permanently available in the Port of Rouen. Tug assistance in the River Seine is available on request.

BERTHING: The main Maritime Port of Rouen extends from the Guillaume le Conquerant Bridge as far as La Bouille over a distance of 11 miles. Quays and wharves cover the length of both banks of the Seine. There are also 5 basins in direct connection with the river without the interposition of any locks;

On the Right Bank: St-Gervais docks; on the Left Bank: the Timber dock, the Rouen-Quevilly dock, the Floating Docks tidal basin, and the "Bassin aux hydrocarbures" at Petit-Couronne.

The extent of quayage in the Maritime Port is about 38,000 ft., and in the river docks 5,900 ft.

Between the downstream limits of the Port of Rouen and the sea are a number of maritime establishments serving local requirements. The most important of these, all of them managed by the Port Authority of Rouen, being the petroleum terminal at Port Jerome and the quays of St. Wandrille (2,000 ft.) and Radicatel (1,380 ft.).

Containers: One berth at the Quai de l'Ouest (St.-Gervais dock) with two 25 ton cranes, two berths at Rouen Quevilly dock with two 25 ton cranes and two 35 ton gantry cranes.

One private berth at Radicatel quay with a gantry crane.

Another container terminal will be built at Petit-Couronne quay for 1980.

Roll-on/roll-off: Five berths in service of which one roll-on roll-off berth at Petit Couronne able to load or unload rolling heavy lifts up to 400 tons (max. draft: 10 m.)

Dock	*Quay*	*Facilities*	*Length* (m)	*Depth at low water* (m)
Charles Babin	SCAC	Storage include 1 hectare of storage space in water (logs)	101	9
	St.-Gervais	7 wine unloading points 1 ramp—load up to to 30 t (Vehicles and paper pulp)	—	7.8
Saint-Gervais	Antilles	5 unloading "norias" for bananas	411	8.8
	Afrique	5 electric cranes 6 t; 4 cranes 8 t 2 gantry cranes 25 t (containers)		
Seine	Rive Droite	5 cranes 4 t; 19 cranes 6 t; 7 wine unloading points connected with 100,000 hl wine sheds	2636	6.3/8.8
Seine River Droite (Aval)	Skalli silo	1 unloading machine for hard corn		7.3
	Paper Mill Aubry	2 cranes 3 t		7.3
	Silo Soufflet	1 loading machine for cereals 600 t/h		6.3
	Silo Levy	1 loading machine—cereals 400 t/h		10.0
	Poste 19	1 ramp—live animals only		7.5
	Poste 25	Pipelines, vegetable oils, Molasses, etc, 56,000 m³ specialised tanks		8.8
	Poste 27	1 ramp; lateral handling (cars)		6.6
Seine	Rive Gauche	4 cranes 6 t; 10 cranes 7.5 t; 3 cranes 8 t Open storage—coal and gypsum	2343	7.0/9.8
Bassin Aux Bois	Quai de France	12 cranes 7.5 t; 2 cranes 6 t Specialised newsprint; china clay	923	7.5
	Quai Neuf	Speed of cranes for cereals: 3 cranes 300 t/h; 2 cranes 600 t/h + silo 100,000 t.	1027	8.8
Rouen-Quevilly	Rive Nord	4 machines for unloading grains		7.3
	Rive Sud	4 cranes 6 t; 8 cranes 8 t; 2 container cranes (25 t.) 2 container gantry cranes (35 t.)	1180	10.5
Seine Rive Gauche (Aval)	Maprochim	2 gantry cranes 7 t and 1 gantry-crane 10 t (Phosphates Rhone-Pouline)	220	8.8
	Cie Rouennaise de dechargement	3 gantry cranes 7.5 t (Coal)	290	8.8
	Poste 14	1 mobile crane — dangerous goods		8.0
	Poste 10	Cereal; loading speed 300 t/h linked with silo of 36, 700 t		7.5
	Petit-Couronne	2 electric cranes 4.5 t; 4 cranes 7.5 t: 3 cranes 8 t; 1 crane 6 t; 1 ramp capable of carrying 400 t for roll-on/roll-off	625	10.0
	SCAC	4 moving gantry cranes 7.5 t	310	8.8
	M.R.M.	oilcake, coal, flour loading machinery for cereals 3 cranes at 400 t/h silo 40,000 t capacity		11.0
	SAMS	2 electric cranes 6 t; 4 cranes 5 t; 2 cranes 2 t 2 gantry cranes 8 t for woodpulp, paper wood, gypsum, bagged cereals	390	8.2
	SOGEMA	2 electric cranes 8 t; 2 cranes 6 t; 1 crane 3 t 1 gantry crane 7 t (fertilizer)	285	8.2/10
	Petit-Couronne	Refined products and Gas pipe-lines		7.5/9.5
	Appontement Jupiter	Crude oil; pipe-lines		11.1
Moulineaux	Moulineaux	1 ramp for ships—up to 30 t 1 ramp for barges (new cars)		7.5
St. Wandrille	St. Wandrille	To be fitted with 4 cranes and partly specialized for coal	645	9.5
Radicatel	Radicatel	20,000 d.w.t. ships	420	
Honfleur	Honfleur		122	

RESTRICTIONS: The height of water above chart datum at Le Havre is broadcast on Channel 11 every 10 minutes by Honfleur VHF port radar station starting 2.5 hours before, until 4 hours after, the initial point of stay tide.

PORT RADAR: Two radar stations are located respectively at the East of Honfleur and on the right bank of the river.

Both stations are operated from Honfleur and work as navigational aids between the first buoys of the channel and Aizier, from 2 hours after until 8 hours after low water Le Havre.

To obtain information call on VHF Channel 16 (156.800 MHz) or 11 (156.550 MHz).

Information given by this radar, at ship's option, is considered as an aid only and implies no responsibility either to the port authority or its agents in any subsequent recourse to such information, which is given free of charge.

ANCHORAGE: In the outer roads at La Carosse and at several places in the river.

Two waiting berths on buoys at Villequier and one at Mesnil-sous-Jumieges.

MAX. SIZE: Vessels over 230 m. length have entered. Draft approximately 2.40 m. more than height of tide at Le Havre. Maximum about 33 ft. Port accessible to vessels of 25,000 d.w.t. fully laden and 55,000 d.w.t. partly laden. The Port Authority's objective is to accommodate ships of 35,000 d.w.t. fully laden by 1980. Ships of 250 m. can be received.

HEALTH: Pratique given by Customs Officers who board on arrival. If any case of suspected disease on board or any reason why vessel should not receive free pratique, Master should radio Agent before arrival, advising full details.

RADIO: Vessels are obliged to give their ETA and draft in salt water at least 5 hours before arrival to Rouen Information Centre via Brest – Le Conquet Radio or Boulogne Radio. The Port of Rouen Authority has introduced a VHF network of frequency modulation for port needs working on the following frequencies: Channel 16 (156,800 mHz); international safety and watch frequency. A permanent watch is maintained on this frequency at the Information Centre of the Port of Rouen.

Channel 11 (156.550 mHz) compulsory frequency to be used by all ships, boats, ferries . . . . in movement between the pilot boat station and Rouen.

Channel 71 (156.575 mHz) secondary working frequency.

Special process for tankers: For oil tankers it is compulsory, before entering the 12 miles limit, to have a VHF contact with Rouen-Pilot or with Rouen-Port, and to keep permanent VHF watch till the ship is back out of this limit.

Tankers over 250 m. length or 12 m. draft must wait for Pilot 7 miles from shore, others can come to La Carosse roads, passing half mile South of lightship Le Havre and remaining always South of a line marked by the buoys LH and RN.

They have obligation to announce every fault in engines, anchors or windlass, steering gear, radar, mooring gear, and their Masters must sign an inquiry paper given by the Pilot when coming on board.

STEVEDORES: From Monday to Friday:

General working schedule; 0700–1100, 1300–1700, 1700–2300, with possible overtime.

Special working schedule for bulk vessels (excluding cereals) and roll-on/roll-off vessels carrying cars: 0700–1100, 1300–1700, 2000–0600 with possible overtime.

On Saturday: for all ships 0700–1300 and 1300–1800.

MEDICAL: All facilities available. Vaccination certificates required if vessels coming from a North African port. Yellow fever inoculations required if vessel coming from South of parallel 30° N.

TANKERS: Petit Couronne, Shell, 3 berths for vessels up to 11 m. draft.

Port Jerome, Esso and Mobil Oil, 2 berths for vessels up to 11 m. draft.

Honfleur, 1 berth for vessels up to 9 m. draft.

Deballasting facilities available at all berths except at Honfleur.

DENSITY: Except at Honfleur, all berths are in fresh water.

FUEL: All grades available from berths or by barge.

CONSULS: The following countries are represented in Rouen: West Germany, Belgium, Denmark, Spain, Finland, Greece, Norway, Netherlands, Portugal, Algeria, Mauritania, Senegal, Sweden, Tunisia.

WATCHMEN: Recommended to employ watchmen on board tankers and vessels handling dangerous cargo.

HATCHES: Opening and closing hatches always performed by ship's crew.

REPAIRS: All deck, engine and radio repairs can be effected.

DRY DOCKS: Two floating docks, the largest of which is 180 m. long. 25 m. wide for vessels up to 14,000 tons.

SURVEYORS: Are represented: Bureau Veritas, Lloyd's Register.

AIRPORT: Nearest Rouen-Boos. Le Havre, Octeville, 80 km. away. Paris, Orly, 120 km. away.

TIME: GMT plus 1 hour in Winter. GMT plus 2 hours in Summer.

POLICE/FIRE/AMBULANCE: Police 17; Fire 18; Ambulance 18.

TELEPHONES Can be connected on board.

IDENTIFICATION CARDS: Crewmen going ashore should carry passport or identity card.

HOLIDAYS: No labour available on the following days; New Year (1st January); Easter Monday; Labour Day (1st May); Ascension Day; Whit Monday; National Day (14th July); Assumption Day (15th August); All Saints' Day (1st November); Armistice Day (11th November); Christmas Day (25th December).

DEVELOPMENTS:

Dredging and embankment operations in order to accommodate by 1980 vessels of 35,000 d.w.t. fully laden in Rouen and of 60,000 d.w.t. at Port Jerome and Honfleur.

Building of a 430 m. quay at the Rouen-Quevilly dock. (76-77).

Building of a 200 m. quay at Moulineaux (77).

Building of a new dredger for the maintenance of the channel in the Seine estuary.

AUTHORITY: Port Autonome de Rouen.

AGENT: Jolasry (France), 52 Quai Gaston Boulet, Rouen. Telex 77588. Tel. 70-87-27.

ST. LOUIS DU RHONE: 43.23 N. 04.48 E. (See Plan Book)

DOCUMENTS:

1 Cargo Manifest or Manifest in Ballast.
Ship's Register.
Bills of Lading.
6 Crew Lists (8 if Spanish or U.S.S.R. or ships bound to these countries).
3 Passenger Lists.
Health Declarations.
Deratisation Certificates.
3 Bunker Supply forms.
1 Declaration of Crew Personal Effects. If on inspection articles or quantities not in conformity or in excess, Master held responsible, articles removed and heavy fines imposed.

PILOTAGE: Compulsory for vessels exceeding 300 tons net. Contact Pilots by Marseilles Radio or by VHF Channel 16 for calling Port de Bouc Port Control, Channel 9 for traffic. Pilot boards 1 mile E.N.E. of the lighthouse on the jetty.

River Pilot required by vessels loading salt in the Rhone river, boards at the locks entrance to Port St. Louis basin.

ANCHORAGE: Suitable anchorage outside Port St. Louis keeping well clear of Fos channel.

RESTRICTIONS: The St. Louis Canal is 3,300 m. long and 63 m. wide, with a depth of 24 ft. 6 in. The lock has a length of 159 m., width 22 m., and depth 24 ft. 6 in.

No entrance allowed between 2100 and 0500 hrs. except in emergency, although entrance may be effected up to 2400 hrs. if ordered before 2100 hrs.

Entrance may be delayed when large tankers are proceeding in the Fos Channel.

HEALTH: Pratique given by Customs officers who board on arrival.

RADIO: Within 150 miles use Marseilles Radio FFM, otherwise St. Lys FFL.

TUGS: Four tugs available from 500 to 1,060 h.p. Ship's lines are normally used.

BERTHING:

Quays	*No. of Berths*	*Draft*
Quai Ouest	3	6.20 m.
,, Nord	2	6.50 m.
,, East	3	6.10 m.
,, Hardon	1	5.50 m.
,, de la Suisse	3	7.92 m.
,, Charles	1	7.92 m.
Oil Installations:		
Quai Shell	1	4.50 m.
,, C.R.E.	1	4.50 m.
,, Petronaphte	1	—
,, Soterm	1	7.00 m.
,, S.A.G.A.	1	7.00 m.

Roll-on/Roll-off Facilities: Four berths: No. 41-44, draft 7.92 m.

STEVEDORES: Shifts are 0800–1200 hrs., 1300–1730 hrs. Saturday afternoon, Sunday and Holidays in overtime. Shifts of 0600–1200 hrs.and 1300–1900 hrs. count as a day each.

CRANES: 3×3/6 tonne cranes; 3×6-tonne cranes, with a reach of 18 m. (59 ft.); 2×6-tonne cranes, with a reach of 22 m. (72 ft.); 1 mobile 3-tonne, with a reach of 18 m. (59 ft.); 2 mobile 6-tonne, with a reach of 24 m. (78.7 ft); 1 derrick crane, with a reach of 20 m. (65.6 ft.).

FRESH WATER: Available from hydrants on the quays at a rate of 100 t.p.h.

FUEL: Available only by barge or railcar.

AIRPORT: Marignane Airport distant 70 km.

AUTHORITIES: Port Autonome de Marseille. Capitainerie de Port du Bouc (Harbour Master).

ST. MALO: 48.38 N. 02.02 W.; (See Plan Book)

DOCUMENTS:

Ship's Register.
Store List in duplicate (ship's stores).
Crew Declaration of Bonded Stores.
Health Declaration.
Manifests and B/Ls.
Crew List (duplicate).
Passenger List (duplicate, if necessary).

PILOTAGE: Compulsory for vessels over 150 NRT. (1) During tidal hours, 2 hours before and after high water, vessels may enter into direct contact with the Pilots on VHF Channel 12. Call Sign "Pilot St. Malo".

(2) Outside tidal hours and during working hours, vessels may call the Port Office on VHF Channel 12. Call sign "Pilot Office – St. Malo".

When waiting for the Pilot, vessels anchor near the land buoy and report their arrival to the Port Office.

In good weather, the Pilot boards near the "Shore-buoy". In bad weather when the wind is from N.E. or N.W. the Pilot may guide the vessel as far as Dinard Roads, where the Pilot will come aboard.

Pilot Cutters: One cutter 42 ft. 6 in. fitted with radar, relief cutter 36 ft. both fitted with radio-telephone and VHF Channels 8, 12 and 16.

ANCHORAGE: Large vessels with draft greater than 13 m. anchor by the land-buoy. Smaller vessels may anchor in St. Malo Roads, there is sufficient swinging room for vessels with draft of 7 m. It is recommended to use a Pilot to come into this anchorage.

RESTRICTIONS: Vessels are allowed to enter from 2 hours before to 2 hours after high water. To be certain of mooring, vessels should arrive at the lock at least 1 hour after high water.

Depth available 20 to 22 ft. at spring tides.

No movements during foggy weather. Large vessels (length greater than 100 m.) approach the lock at high-tide. Tankers lock in by themselves. Movements are carried out day and night.

MAX. SIZE: The height of the tide, the length of the lock and width of the channel must be taken into account.

Cargo Vessels. Length 150 m. (492 ft.), beam 20 m. (65 ft. 6 in.), draft for vessels length 135–150 m., height of tide less 2.5 m. (To be suppressed end of 1978). Less than 135 m. LOA: Rise of tide. 2 tugs required.

Tankers: Length 147.50 m. (443 ft.), beam 20 m. (65.6 ft.), draft see *"Cargo Vessels"*. 2 tugs required if vessel not fitted with bow-thrust.

HEALTH: Customs Officers are appointed as Health Officers and deliver pratique. In case of suspect disease, Masters must declare it at once by radio to their Agents who will contact authorities.

RADIO: Vessels coming from West use Brest le Conquest Radio, call letters FFU. Vessels coming from North should go through Boulogne Radio, call FFB.

VHF:

(a) Port Office – Channel 12; tidal hours and working days.
(b) Pilot – Channels 6, 12 and 16, when awaiting a vessel.
(c) Tugs – Channels 6, 12 and 16, at the time of high tide.

Vessels call Pilot and tugs on 12 or 16 and change to Channels 6 or 8 for working.

TUGS: Two tugs are available at St. Malo (650 and 600 h.p.). Usually joins vessel at the end of breakwater. Ship's lines are usually used.

BRIDGES: Can be passed during tide vacation, otherwise, notice required to open.

BERTHING: One berth outside lock for car ferries.

Basin Duguay Trouin, length 1,870 m. Bassin Vauban, length 1,100 m. Bassin Bouvet, length 750 m. Duguay Trouin and Bouvet Docks: 140 m. long, 16.50 m. breadth.

2 new quays in Vauban Dock, (1) Quai Des Corsaires, length 185 m. 2 cranes on rails. Capacity 12 tons at 14 m. Quay used for general cargo. (2) Tanker quay, extension of Quai Des Corsaires, length 130 m. Diameter of discharge pipe 200 mm., one mobile arm, vessels to supply reducers. Max. discharge rate, 650 cu.m./hour.

Grain silos: 1 of 6,000 tons capacity with loading possibilities of 130 t.p.h. and 2 of 6,500 tons capacity each with loading possibilities about 100 t.p.h. each are situated in Bassin "Duguay Trouin".

CRANES: 12 electric cranes, capacity 5–12 tons and 6 mobile cranes capacity 7–13 tons.

TANKERS: Also see "Berthing".

No deballasting facilities. Tankers wishing to effect repairs must leave port and wash out their tanks and obtain a gas-free certificate.

On completion of operations tankers must leave on the next tide. If a second tanker is waiting to berth she must wait in the roads.

Safety instructions are issued when the vessel passes through the locks.

BERTH ALLOCATION: Dependent upon goods to be discharged and characteristics of vessel. Bearing in mind the widths of the channels, their depth and dimensions at the foot of the quays, the height of the dock which varies on average between 11 m. and 12.5 m.

The largest vessels tie up at Quai Des Corsaires.

It is recommended that an advance notice be sent via agents to the Port Office 15 days prior to arrival, so that the vessel may be received under the best possible conditions.

STEVEDORES: In order to have workers ready on arrival, Masters are kindly requested to give as accurate as possible ETA the day before arrival, especially if there are many ships discharging at same time.

Normal working hours 0800-1200 and 1400-1800 from Monday to Saturday, except holidays. There is no night overtime. Dispensations may be made to finish a vessel so that she may catch the tide.

Rate of discharge dependent on type of goods involved.

MEDICAL: Notice is required to obtain an appointment with doctors or dentists. Hospital service is available.

DENSITY: Average density is 1010.

FRESH WATER: Can be delivered from quay.

FUEL: Bunkers delivered at St. Malo (with notice varying, depending on the Company – Shell 2 days, Esso 1 week, etc.) come from Donges by road lorries and cost of haulage is supported by the ship (expensive). D.O. can be obtained from local suppliers but out of contract.

FIRE PRECAUTIONS: Usual non-smoking precaution (a watchman is compulsory for tankers).

DEVELOPMENTS: A special discharging machine for bulk cargoes, capacity 1,000 t.p.h. will be in operation at Quai des Corsaires by end of 1978. A phosphoric acid terminal, capacity 11,288 tons, in Inner Basin, Basin Jacques Cartier, will be in operation end of 1978. The terminal will operate via the petrol tanker berth.

GANGWAY/DECK WATCHMEN: Watchmen are not compulsory except for tankers.

OPENING/CLOSING HATCHES: This work is normally carried out by crew. Stevedores' cranes may help for the beams, but dockers will not touch them.

CERTIFICATES: As per International Conventions, all Safety Certificates, Load line, Radio, etc.

CUSTOMS ALLOWANCES: 200 cigarettes, or 200 grams of tobacco, and 1 bottle of spirit per crew member.

IDENTIFICATION CARDS: Crew members must have an identification card on their sailor's book when going ashore.

CONSULS:

Netherlands		(99) 56.07.21.
Denmark	(Vice-consul)	(99) 56.07.21.
Norway		(99) 56.07.21.
Finland	(Vice-consul)	(99) 56.31.57.

REPAIRS: Deck and engine repairs can be carried out by shipyard or workshops. Electricians are also available. RAMAC Agency can repair radars and radios, also Radio-Ocean agency.

DRY DOCKS: One dry dock. Max. length admissible 120 m., breadth 15.5 m. and draft 8.0 m. One slipway, 500 tons. Length admissible 45 m., breadth 9 m. With sufficient notice.

REPATRIATION: Can be effected from St. Malo by train or plane.

AIRPORTS: 8 miles from port. Wintertime, services to Jersey (C.I.), with correspondence to England and Wales. Summertime, several times per day to Jersey, London, and to Paris except week-ends.

TIME: Local time is GMT plus 1 hour. From April till September GMT+2.

HOLIDAYS: French legal holidays. Cargo work may be carried out, but arrangements must be made with stevedores.

POLICE/AMBULANCE/FIRE: Police, 40.85.80 and 17; Ambulance and Fire, 18.

TELEPHONES: No telephones on the quays.

DELAYS: Berthing delay will only be due to tide. For loading or discharging, it depends what kind of cargo is handled.

SERVICES: Compass adjusting, radar or radio adjusting can be carried out.

SHORE LEAVE: Crew members are allowed ashore.

AUTHORITY: Commandant du Port.

AGENT: See "Paris".

ST. NAZAIRE: 47.17 N. 02.12 W. (See Plan Book)

DOCUMENTS:

Cargo Manifest or Manifest of Ballast.
Certificate of Cargo space.
Bills of Lading.
Ship's Register.
6 Crew lists.
3 Passenger lists.
Health Declaration.
Derat Certificate or Exemption.
Declaration of crew personal effects.

PILOTAGE: Compulsory for vessels longer than 225 ft. owning radar/VHF. Starts about 4 miles north of lighthouse of Le Pilier, on lightbuoy SN 3. Pilot boat on station day and night, if weather conditions permit, West of a line drawn between SN 3 lightbuoy and lightbuoy of "La Couronnee" about 2 miles N.N.E. If Pilot unable to come aboard he may invite ship to follow his boat until they have reached a better shelter. Ships heading for one of Loire estuary ports should give ETA at least 24 hours ahead to Port Captain of Saint-Nazaire. Approximate time of arrival at SN 3 buoy, the further destination and speed should be given. VHF contact can be made direct with St. Nazaire pilot boat or "Estuaire de la Loire" Pilot station.

ANCHORAGE: When pilot service withdrawn, anchor near SN 3 lightbuoy or in "Rade des Charpentiers". In rough sea ships heave to off-harbour. In case of doubt contact pilot boat by VHF or phone. Sometimes Pilot taken aboard on SN 3 is relayed by another who will board near the outer port of St. Nazaire to bring ship upstream.

MAX. SIZE: Entrance by L. Joubert lock. Length 11,610 ft., breadth 164 ft., draft 30 ft. 6 in. 2 other locks available – length of 173 ft. to 692 ft.

RADIO: Stations at: St. Nazaire; Brest-le Conquet, and Bordeaux-Arcachon.

HEALTH: Pratique given by Customs Officers who board on arrival. If any case of suspected disease on board or any reason why vessel should not receive Free Pratique, Master should radio Agent before arrival, advising full details.

TUGS: Tugs are provided by "Union des Remorqueurs de l'Ocean" at St. Nazaire; also "Les Abeilles" at Nantes.

BERTHING: Tidal basin with 8,680 ft. of public docks.

STEVEDORES: Available.

MEDICAL: Facilities available at any time.

FRESH WATER: Available on docks.

FUEL: Available in any grade of viscosity. Advance notice of at least 2 days must be given if vessel has to bunker on Saturday or Sunday. Otherwise, delivery within 36 hours by barge.

FIRE PRECAUTIONS: Usual precautions for tankers in neighbourhood of refineries; no fire, no smoking. Ground wire for ship.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Done by crew.

IDENTIFICATION CARDS: Not needed.

CONSULS:

Algeria	tel.	74.38.19
Belgium	,,	71.57.10
Brazil	,,	71.87.33
Denmark	,,	22.41.46 and 46.31.50
Finland	,,	75.53.08
German (Fed. Republic)	,,	71.93.18
Greece	,,	73.46.13
Holland	,,	71.16.31
Norway	,,	22.51.12 and 21.33.35
Portugal	,,	73.05.04
Spain	,,	71.59.53
Sweden	,,	71.87.31
Switzerland	,,	71.82.11
Tunisia	,,	71.10.52
Great Britain	,,	76.89.87

REPAIRS: Very good facilities exist for all types repair work.

DRY DOCKS: Shipyards for large vessels at St. Nazaire.

AIRPORT: Nantes: Good connections with French internal network (Air Interin and also international mainly with stop-over Paris). 5 daily flights to the capital. Direct flights to Bordeaux, Lorient, La Rochelle, Lyons, etc., St. Nazaire: 2 daily flights to Paris.

TIME: Paris time GMT plus 1 hour; seasonal alteration.

HOLIDAYS: New Year (1st January no labour available); Easter Sunday (possibility of labour with overtime); Easter Monday (no labour available); Labour Day (1st May no labour available); Ascension Day (possibility of labour with overtime); Whit Sunday (possibility of labour with overtime); Whit Monday (no labour available); National Day (14th July, no labour available); Assumption Day (15th August, no labour available); All Saints' Day (1st November, no labour available); Armistice Day (11th November, possibility of labour with overtime); Christmas Day (25th December, no labour available). N.B. Every Sunday and day marked "possibility of labour with overtime" can be worked at the rate of 100%.

POLICE/FIRE/AMBULANCE: Police, 17; Fire, 18; Ambulance, 18.

TELEPHONE: Arrangements are possible.

SHORE LEAVE: No restrictions.

AUTHORITY: Port Autonome de Nantes-St. Nazaire.

AGENT: Jolasry (France), 44, Boulevard Paul-Leferme, Saint Nazaire. Telex: 71931. Tel. 70-01-18.

SETE: 43.24 N. 03.42 E. (See Plan Book)

PORT LIMITS: The seaward boundaries of the Port within which a vessel is considered to be an "arrived vessel" are indicated as follows: To the South by a line with the red light of Eastward end of breakwater bearing 257°; to the East by a line with the church tower of Frontignan bearing 005°; to the North by coastline.

A second zone is a circle of 1 mile radius centered on a point located on the bearing 298° and at 3.2 nautical miles from Eastward end (Red Light) of breakwater. This zone is connected from a landing buoy by a channel 500 m. wide steering 326°. This area is only for big tankers from 100,000 tons up to 270,000 tons which operate at buoy IMODCO Single Point Mooring System.

DOCUMENTS:

Cargo Manifest or Manifest of Ballast.
Certificate of Cargo space.
Bills of Lading.
Ship's Register.
6 Crew Lists.
3 Passenger Lists.
Health Declaration, eventually vaccination list.
Derat Certificate or Exemption.
Declaration of Crew Personal Effects.
2 Provision Lists.

PILOTAGE: Request Pilot by international signals (sound, flags, light signals) or telephone through Marseilles Radio or VHF by Sete Radio Channel 25, tel. 74.34.06 (or pilot boat VHF Channel 12). Description of pilot boats; motor launch with black hull, white band, white anchor on hull at bow. Pilot embarks between 1 and 2 miles South of breakwater in good weather. In bad weather he embarks in the shelter of l'Epi Delon. In this case make prior contact by radio or VHF (Marseille or Sete Radio) or Port Office VHF Channel 12. Provide a ladder on each side.

ANCHORAGE: In roads from 0.5 mile to 1 mile to South of breakwater. (See "Port Limits" and "Tankers").

RESTRICTIONS: *Commercial Harbour:* In the Canal Maritime, length max. 145 m., breadth 20 m., draft 22 ft. 06 in.

In the Bassin a Petroles, max. length 140 m., draft 33 ft. except to the new petroleum pier for tankers up to 30,000 d.w.t., max. length 225 m., draft 11 m. (36 ft.)

MAX. SIZE: *Sea Line Frontignan:* South Berth: S.B.M. Tankers 270,000 d.w.t. draft 21 m. (69 ft.).

North Berth: C.B.M. Tankers up to 100,000 d.w.t. lightened draft 13.1 m. (43 ft.).

Bassin a Petrole: New Berth Tankers 30,000 d.w.t. draft 11 m. (36 ft.).

New dock for ore carriers 210 m. length; 10.4 m. draft (34 ft.)

Commercial Harbour up to 8.5 m. draft (28 ft.).

Commercial Harbour in the Canal Maritime: max. length 140 m; breadth 20 m., draft 6.85 m. (22 ft. 06 in.).

HEALTH: Pratique given by Health Officers who board on arrival. If any case of suspected disease on board or any reason why vessel should not receive Free Pratique, Master should radio Agent before arrival, advising full details.

RADIO: Marseille or Sete Radio VHF Channel 21 or 25, Port Office Channel 12.

TUGS: Tow line to be furnished by ships. Vessels taken in tow near the breakwaters on the North side.

BERTHING: Commercial Harbour Avant-Port, Nouveau Bassin, Bassin Orsetti maximum draft 8.50 m. Canal Maritime, Bassin du Midi, Canal Lateral: max. draft 6.85 m. Dock No. 1: East Quay: 3 berths max. draft in approach channel and alongside the South berth (E1): 11 m. Central and North berth: (E2 and E3): 10.40 m. West Quay: 2 berths. Central berth (G2) and North berth (G3) max. draft: 11 m.

CARGO HANDLING FACILITIES: Dock 1 – East Quay: Berth E1 (Southward) and E2 (Central) specialise in ore. Berth E3 (Northward) specialises in general cargo and timber, also roll-on/roll-off berth with movable ramps for big ships. West Quay: Berth G2 and G3 for general cargo and one berth (G3) roll-on/roll-off with fixed ramp for big ships. Orsetti Dock South Quay (D) general cargo and a roll-on/roll-off berth for early fruit and general cargo (D3). North Quay (B) specialises in phosphate, also one roll-on/roll-off berth (B2).

TANKERS: Frontignan Sea Line Terminal North berth (C.B.M.) 1 berth for tankers up to 100,000 d.w.t. lightened draft 13.1 m. (43 ft.). Two 12-in. hoses for crude oil discharge. Submarine pipe-line 28 in. diameter. Commerial Port: 1 berth for tankers up to 30,000 d.w.t. draft 11 m. (36 ft.). 1 old berth for tankers up to 140 m. length or 10,000 d.w.t., draft 10.1 m. (33 ft.). Slop disposal facilities available up to 1,000 cu. m. per hour.

Frontignan Sea Line Terminal (South berth) Mobil SBM.

Operator: Mobil Oil Francaise.

Position: 43° 22′ 12″ N. 03° 46′ 49″ E.

Restrictions: Least depth of water 92.5 ft.

Max. Size: No limit on length and beam. Max. draft 69 ft.

Pipe-line: Length, 26,000 ft. Diameter 44 in.

Hoses: 2×16 in. Bow to manifold distance should not exceed 600 ft. Connections port-side.

Max. Pressure: 125 p.s.i. at rail.

Pumping Rates: 8,500 t.p.h.

Density: 1026.

Fresh water: Not available.

Fuel: Bunker "C" available by barge, capacity 900 tons. D.O. not available.

Ballast: No facilities for receiving dirty ballast.

Vessels up to 50,000 d.w.t. normally berth at spread mooring.

Regulations and Information: When scheduled to discharge at SBM Master will receive the following standard message from Mobiltrans Ny: "Your vessel will discharge at Frontignan SBM. located 43° 22′ 12″ N. 3° 46′ 49″ E. stop 4 days prior arrival radio your Agent your ETA SETE contact "Sete Port Office" on VHF Channel 12 approximately 30 miles range advising your ETA to entrance buoy located 43° 14′ 55″ N. 3° 53′ 40″ E. Only when authorisation is granted by "Sete Port Office" you may proceed to SBM on *compulsory* route on course 326° extending 500 m. each side of line joining approach buoy to SBM. When proceeding on compulsory route your vessel shall exhibit additional marks by day 3 black shapes in a vertical line the highest and lowest 1 ball the middle 1 diamond every one spaced by 1.5 m. stop by night 3 all-round lights in a vertical line the highest and lowest red the middle white every one spaced by 2 m. stop. Pilot will board approximately 3 miles seawards from SBM on compulsory route".

Your Agents will forward the following cable: "Advise ETA type size your manifold flanges whether suitable reducers available and Smit's Bracket fitted on forecastle stop Boom to lift 16 in. ID floating hose and two 16 in. 150 ANSI standard flanges ready on portside. On forecastle have 2 polypropylene 8 in. messengers 150 fathom ready. Accommodation ladder on starboard and boat ropes each side."

The "approach buoy" referred to in para 1, is located in 43° 14′ 55″ N. 3° 53′ 40″ E. having the following characteristics: 3 m. diameter – 7 m. height mast painted with vertical strip white and red with 2 crosswise shapes, with a white light 4 flashes every 12 seconds. Proceeding inshore of this buoy and inside the 12 mile line is not allowed without prior authorisation granted by "Sete Port Office" on VHF Channel 12.

An approach channel exists between the approach buoy and the SBM extending 500 m. each side of a line joining the approach buoy to SBM and must be used as a compulsory route on a course of 326°. Same compulsory route applies for outgoing tankers leaving the SBM.

When proceeding in the approach channel the vessel shall exhibit in addition to the normal navigation signals: *by day:* 3 black shapes in a vertical line the highest and lowest 1 ball, the middle one a diamond – every one spaced by 1.5 m. *By night:* 3 all-round lights in a vertical line, the highest and lowest red, the middle one white, every one spaced by 2 m.

The Pilot boards incoming tankers and leaves outgoing tankers approximately 3 miles seawards from SBM on the compulsory route. He will stay on board during the period the vessel remains secured to the SBM.

Vessels scheduled to discharge at the SBM or departing from it are only permitted to transit the channel between the SBM and approach buoy.

Every vessel proceeding to or departing from the SBM which requires to anchor should use the following anchorage areas:

Anchorage A – Vessels with less than 15 m. (49 ft.) draft should anchor in the area bounded in the North by a line 0.5 miles off the breakwater, and in the East and West by meridian passing through the extremities of the breakwater, and in the South by the 20 m. (65.7 ft.) contour.

Anchorage B – Vessels having a draft of greater than 15 m. (49 ft.) should anchor in the Southern semicircle around the SBM extending between 400 m. (1,310 ft.) and 1,850 m. (6,000 ft.) from the SBM.

When a vessel is proceeding to the SBM a Marine Superintendent and a mooring team will board. Then anchors should be secured and cable pawls in the down position, deck scuppers must be plugged tight and VHF on standby on Channel 12.

Throughout the period the vessel remains at the SBM the engine should be ready and power available on deck winches and windlass.

Adequate deck lighting must be available at night, and a constant fo'c'sle watch kept on the SBM.

Propeller r.p.m. must be kept to a minimum. Intermediate ballasting may be required in order to prevent excessive strain on moorings.

While weather operational limits will depend on circumstances port regulations specify the following criteria: Vessel must cease discharge when wind is 30 knots, significant wave height 8 ft. (assumed current 2 knots) vessel must leave berth when wind is 45 knots and significant wave height is 18 ft.

The Master of every oil tanker coming to Sete to load several refined products, some of which are heated, is required to give the Port Office, a cargo plan before loading.

Masters of oil tankers are invited to follow the terms of new French Law (Arrete Prefectoral No. 491 ADM du 24 Mai 1978) specially to send a message to the French Admiralty (Prefet Maritime de Toulon) six hours before entering the territorial waters and six hours before leaving the Port of Sete.

FRESH WATER: Available on most quays or by lighter of 140 tons capacity.

FUEL: All qualities available subject to advance notice given.

REPAIRS: Handled by Scotto et Repetto: 5 slipways for handling and repair of small vessels, Mechanical workshops, General repairs.

Claverie, Mechanical workshop for heavy repairs, and boiler repairs.

Di Biase, general repairs and Mechanical workshop.

Affre, General repairs.

CONSULS:

Denmark	tel. 74.30.20.	Norway	tel. 74.31.83.
Finland	tel. 74.25.72.	Sweden	tel. 74.25.72.
Netherlands	tel. 74.25.72.		

Others at Marseilles.

WATCHMEN: Service necessary for ships loading or unloading dangerous merchandise. Optional for other ships.

CUSTOMS ALLOWANCES: 40 grammes tobacco per day per man (calculated in accordance with the length of voyage undertaken by the ship). Amount of alcohol fixed by Customs in accordance with the crew, and length of ship's stay in port. It is a matter of tolerance and not of right.

REPATRIATION: Repatriation and crew changes are easily arranged.

IDENTIFICATION CARDS: Crew men going ashore should carry passport or identity card.

TIME: GMT plus 1 hour – alteration from end of March to end of September to GMT plus 2 hours.

HOLIDAYS: New Year (1st January, no labour available); Easter Sunday (possibility of labour with overtime); Easter Monday (no labour available); Labour Day (1st May, no labour available); Ascension Day (possibility of labour with overtime); Whit Sunday (possibility of labour with overtime); Whit Monday (no labour available); National Day (14th July, no labour available); Assumption Day (15th August, no labour available); St. Louis Day (Monday, no labour available); All Saints Day (1st November, no labour available); Armistice Day (11th November, possibility of labour with overtime); Christmas Day (25th December, no labour available).

N.B. Every Sunday and day marked "possibility of labour with overtime" can be worked at the rate of 100%.

AUTHORITY: Commandant du Port de Sete.

AGENT: See "Paris."

STRASBOURG: 48.34 N. 07.42 E. **(See Plan Book)**

PORT LIMITS: In Strasbourg (Lat. 48° 34′ N., Long. 7° 42′ E.), the Port Autonome extends from the Km. 285 to the Km. 297 upon the Rhine, occupying an area of 1093ha., of which 234ha. are water areas including 14 docks (6 have a constant level, 8 a variable level), and 2 fore-harbours.

Out of these limits, the Port Automome de Strasbourg includes 8 branches designed for the handling of building materials, and 2 ports, Marckolsheim (at Km. 242) and Lauterbourg (at Km. 349), all the branches and ports being on the left bank of the Rhine.

DOCUMENTS: The ships must hold some documents, which they have to keep at disposal of the administration or the inspection authority when required, as following:

Certificate of Survey.
Certificate of Tonnage.
Certificate of Registration.
Log-Book.
Booklet of Verification of the used oils.
Attestation for Equipments of liquified gases.
Customs Documents for the carriage of goods.
Fluvial Bill of Lading.
Rhine Manifest.
Certificate of Ability to steer the ship.
Police Regulation for the Navigation on Rhine.
A.D.N.R., regulation for carriage of dangerous goods.
the documents relating to the boilers and other tanks under pression.

PILOTAGE: The pilotage is not compulsory on the Rhine and usually the Masters do not ask for a Pilot except for Gebirge and the Haut-Rhein. A Pilot can be obtained in the port of Kehl by dialling the number 19 — 49.7851.20.70.

ANCHORAGE: The ships have at disposal an area of about 10ha. in the North and South fore-harbours to take anchorage. Depth of water: at least 5.20 m.

RESTRICTIONS: Restrictions to navigation are to be published in the Advices to the Nautical Corporation of the Inland Water Transport.

MAX. SIZE: The max. sizes of ships allowed on the Rhine are as follows: Length: 110 m., — breadth: 11.4 m. The ships of Rhine do not exceed a draft of 4.0 m.

Dimensions of the locks: — North lock: length 125 m., breadth: 13.5 m., South lock: length 125 m., breadth: 13.5 m.

In the constant level docks, the water depth is 3.5 m., but only along the North—South axis of the port; if not there, the water depth is 2.5 m.

In the variable level docks, which are the docks with a direct communication with the Rhine, the minimum depth is 4.30 m.

These depths are given, the Rhine being supposed at its lowest bench-mark: 135 m.

HEALTH: There is no Health Service for the Rhine.

RADIO: All communications on the Rhine are performed by radio-link and radiotelephony:

VHF Channels 10 and 13: used for ship to ship communications.

VHF Channels 20 and 22: used for transmitting of nautical advice in the way shore-ship and in the reverse order.

VHF Channels 24, 25, 26 and 27: used for public communications.

RADAR: There is no radar station on shore.

TUGS: The Port Autonome de Strasbourg put at disposal of customers four tugs and one 600 C.V. pusher according to their needs.

BERTHING: 10 km. of quays can be used for mooring. Some of these quays are situated in the constant level docks (max. draft 2.5 m.), some are in the docks that link with the Rhine (max. draft 4.30 m.). Tankers berth only in the Oil Dock Harbour.

BULK CARGO FACILITIES: — with grain elevators: 2 berths for loading, and 2 berths for discharging.

Loading of gravel on the Rhine by belt-conveyors (8 facilities).

Loading and unloading of hydrocarbons in the Oil Dock Harbour by 14 facilities operating each at the rate of 300 cu.m./hr.

SPECIALISED CARGO-HANDLING FACILITIES: Containers up to 40 metric tons; heavy packages up to 300 metric tons..

The two operations are carried out at the mooring berth named "Colis Lourds" (heavy packages) and utilise a length of 180 m. of quay.

BRIDGES: The head room under the bridges reach 8.8 m. in the constant level docks.

MEDICAL: Civil Hospital, I, place de l'Hopital, 67000 Strasbourg, tel. 36.71.11.

DENSITY: The density of water is about 1000.

FRESH WATER: Fresh water is supplied by Ets. Koejac, tel. 61.26.78.

FUEL: Bunkering can be arranged with the m/s *Robertsau*, G.P.S., tel. 61.2821. or m/s *Jumbo*, Etakoejae, Tel 61.26.78.

CONSULATES:

West Germany:	(88)32.61.86
Belgium:	(88)35.43.63
Great Britain:	(88)36.64.91
U.S.A.:	(88)35.31.04
Netherlands:	(88)61.93.67
Switzerland:	(88)35.15.17
Austria:	(88)35.13.94
Poland:	(88)61.38.00

REPAIRS — SLIP: All the repairs can be carried out at: Forges de Strasbourg — Scar, tel. 34.68.00. 101, rue du Rhin Napoleon, 67100 Strasbourg.

Any vessel capable of using the port can use the Forge-de Strasbourg slip.

SURVEYORS: Surveyors of the Commission de Visite, named by the Commission Centrale pour la Navigation du Rhin, can be obtained by the Captain.

WATCHMEN: Ship's crew, if required.

OPENING/CLOSING OF HATCHES: Opening and closing of the hatches are performed by the crew or by the staff of the company freighting the ship, as any other handling. Dockers do not exist in the port of Strasbourg.

REPATRIATION: All the facilities exist for effecting crew changes and arranging any necessary repatriation.

AIRPORTS: Distances from Strasbourg: Strasbourg-Entzheim: 15 km. Strasbourg-Mulhouse: 130 km. (airport Muljouse Bale). Strasbourg-Francfort: 220 km.

HOLIDAYS: Work is stopped during the weekends and the statutory holidays. Labour can be obtained on these days if necessary.

POLICE/AMBULANCE/FIRE: Police: 17 — Ambulance: 33.33.33 — Firemen: 18.

TELEPHONES: Office of the P et T, 5, rue du Port du Rhin, 67000 Strasbourg. In case of emergency: La Capitainerie du Port, 5, rue du Port du Rhin – North Lock of the Port, quai Jacoutot, can be contacted at any time. Tel. 32.49.15.

SERVICES: For the ship: Tank cleaning: SPIRSE, 14, rue de Rouen, 67000 Strasbourg, tel. 61.40.45

Supplying of material: Koejac, quai des Belges, 67000 Strasbourg, tel. 61.26.78.

Electronic repairs or supplies: Radio-Metzger, 17, rue de Dunkerque, 67000 Strasbourg, tel. 35.45.42.

For the crew and various formalities (customs): La Capitainerie du Port, 5 rue du Port-du-Rhin, 67000 Strasbourg, tel. 32.49.15.

SHORE LEAVE: The Master must introduce himself, within the 2 hours following his arrival, to the Commissariat Special du Port, 5 rue du Port du Rhin, 67000 Strasbourg, and produce the passports of the crew. The passenger ships have to comply with the regular supervision of authority. Each member of crew must be holder of an identification card or a passport when he is ashore.

REGULATION: The Reglement Particulier de Police du Port is very helpful to the Master and let him know the particulars of the Port of Strasbourg.

DELAYS: The commercial operations begin and finish at the dates and hours shown upon the fluvial bill of lading. Every delay is subject to the payment of penalties. Except for the passenger ships, ships do not give notice of their arrival to the authority, before they enter into the port.

AUTHORITY: Port Autonome de Strasbourg.

TONNAY CHARENTE: 45.57 N. 00.53 W.

DOCUMENTS:

2 copies Crew List.
2 copies Ship's Stores Lists.
2 copies Crew Manifests (Tobacco List).
2 copies Passenger List (if any).
1 Declaration of Ballast.
Manifest form Last Port.
1 copy Bill of Lading (in case of any cargo to be landed).
Ship Register to be shown.
Deratisation Certificate or Exemption.

PILOTAGE/ANCHORAGE: Vessels have to proceed to about half a mile S.S.W. Isle of Aix Lighthouse and to drop anchor in the No. 115 alignment when safe anchorage is open (lowest tides; minimum depth of water 26 ft.).

River Pilot joins ships there, about 3 to 1 hour before high water, depending on draft and size of vessel concerned.

Pilot boat is equipped with VHF.

RESTRICTIONS: As the River Charente is unlighted, movements are not possible at night. However, vessels may leave anchorage in dark and come up river at daybreak (anchorage area is about 5.5 miles from the mouth of the river).

MAX. SIZE: Max. permissible LOA about 378 ft.; max. permissible draft about 17 ft. 6 in. at any tide; max. permissible draft 21 ft. 6 in. at spring tides.

HEALTH: Free pratique is to be obtained on arrival at port. Usual yellow flag signal to be raised.

RADIO: Ships coming from South: Bordeaux-Arcachon Radio Station. Ships coming from North: Saint-Nazaire or Brest le Conquet Radio Stations.

VHF: No continuous listening out at the port. Nevertheless, vessels coming into the Roads can call up a correspondent by phone through Bordeaux – Radio – Channel 26.

TUGS: No tug is available. In case of need, tug may be obtained from La Rochelle-Pallice (about 20 miles).

BERTHING: 1 private berth for grain loading, which can take vessels up to 100 m. length. 1 berth 200 m. long for handling general cargo. 3 waiting berths. The central waiting berth can be used for handling small cargoes from 500 to 1,000 tonnes. Depth of water along the quays is an average of 6 m.

CRANES: 2 × 5 tonne cranes. 2 × 3 tonne cranes. 1 mobile crane of 5 tonnes. All the cranes are capable of working with hooks or scoops.

BRIDGES: The Rochefort Bridge clearance over highest water is about 98 ft. (30 m.).

STEVEDORES: A 24-hour notice is required in order to arrange loading/unloading operations.

Discharge rates: Coal – about 1,200 tons per day of 8 hours' work.
Phosphates – about 1,500 tons per day
Zinc concentrates – about 1,400 tons per day.

Loading rates: Grain 2,000/2,500 tons per day.

OPENING/CLOSING HATCHES: This work is the responsibility of the crew.

MEDICAL: The nearest hospital is at Rochefort (about 4 miles).

FRESH WATER: Fresh water may be obtained alongside, from hydrants, at the rate of about 10 t.p.h.

FUEL: Must be obtained from La Pallice (about 20 miles) by lorries.

REPAIRS: Small repairs may be carried out by local workshops. Nearest shipyard is at La Pallice.

REPATRIATION: Changing crew and necessary repatriation formalities may be effected.

AIRPORT: The nearest airport is La Rochelle (about 30 miles). Possible to reach Paris airports in a few hours by train.

POLICE/AMBULANCE/FIRE: Police: Rochefort H.Q. – Tel. 17; Tonnay-Charente Gendarmerie: Tel. 88.20.38; Ambulance: Tel. 99.30.69; Fire: Tel. 18 or 88.20.38.

AUTHORITY: Harbour Master.

AGENT: See "Paris."

TOULON: 43.07 N. 05.55 E.

DOCUMENTS:

Cargo Manifest or Manifest of Ballast.
Certificate of Cargo Space.
Bills of Lading.
Ship's Register.
6 Crew Lists.
3 Passenger Lists.
Health Declaration.
Derat Certificate or Exemption.
Declaration of Crew Personal Effects.

PILOTAGE: Pilot station is situated on President Fournel Quay, telegraphic address; Capitainerie de Port de Commerce, Toulon. Pilotage compulsory for vessels over 150 g.r.t. Pilot boards 100 m. North of the semaphore station at Cap Cepet.

There are 3 mooring buoys in the Inner Harbour owned by the Navy. The buoys can be utilised by merchant ships on request and are able to accommodate vessels up to 30,000 tons displacement.

RESTRICTIONS: Entry can be made by day and night except for vessels loading with refined petroleum or dangerous cargoes which are not allowed to enter between sunset and sunrise.

MAX. SIZE: The port is approached by a channel 125 m. wide. The docks can accommodate without tug assistance ships up to 250 m. length and 8.80 m. draft.

Renovation and reconstruction work is being carried out, after which passenger vessels of over 300 m. length and cargo vessels of up to 11 m. draft will be accommodated.

HEALTH: Pratique given by Customs Officers who board on arrival. If any case of suspected disease on board or any reason why vessel should not receive free pratique, Master should radio Agent before arrival, advising full details.

TUGS: Naval Tugs. There are many harbour tugs up to 1,000 h.p. and several deep sea tugs up to 2,000 h.p. controlled by the French Navy which may be called on for assistance by the Harbour Master or Pilots.

Commercial Tugs. 2 tugs of 180 h.p. owned by the Port Authority are used to assist smaller vessels.

BERTHING: President Fournel Quay, 335 m. length, depth alongside 9 m.

East Quay, 193 m. length, depth alongside 8.50 m.

Minerve Quay, length 147 m., depth alongside 7 m.

TANKERS: Tankers discharge at naval installations at Milhaud and Lazaret.

Total Terminal. 1 jetty berth for tankers up to 6 m. draft, and a buoy berth for vessels up to 15,000 tons displacement.

Societe de la Raffinerie du Midi. 1 dolphin berth for white oil cargo only.

STEVEDORES: There is a permanent working force of 40 dockers which can be increased by casual labour to 120 men if required. Shifts are available for 4 hours, 8 hours or 9 hours with possibilities for overtime.

FUEL: Only available by tanker lorries.

REPAIRS: Forges et Chantiers de la Mediterranee, Shipyard specialising in naval construction. Total length of repair quays 835 m. Heavy-lifting facilities available.

All types of repairs can be carried out at the Naval Dockyard.

DRY DOCKS: Several dry docks available in the Naval Dockyard, of which 3 can accommodate vessels in excess of 250 m. length.

IDENTIFICATION CARDS: Crew men going ashore should carry passport or identity card.

TIME: GMT plus 1 hour in Winter. GMT plus 2 hours in Summer.

HOLIDAYS: New Year (1st January, no labour available); Easter Sunday (possibility of labour with overtime); Easter Monday (no labour available); Labour Day (1st May, no labour available); Ascension Day (possibility of labour with overtime); Whit Sunday (possibility of labour with overtime); Whit Monday (no labour available); National Day (14th July, no labour available); Assumption Day (15th August, no labour available); All Saints' Day (1st November, no labour available); Armistice Day (11th November, possibility of labour with overtime); Christmas Day (25th December, no labour available). N.B. Every Sunday and day marked "possibility of labour with overtime" can be worked at the rate of 100%.

AUTHORITY: Direction Departmentale de l'Equipment, Etablissement Maritime de Toulon.

AGENT: See "Paris".

TROUVILLE-DEAUVILLE: 49.23 N. 00.05 E.

(See Plan Book)

The port situated on mouth of River Touques, is composed of 2 parts: Trouville for small fishing vessels, and Deauville including 2 docks for cargo ships and pleasure boats.

DOCUMENTS:

1 Crew List.
1 Passenger List.
Tonnage Certificate.
2 Cargo Manifests.
Bills of Lading.
1 Crew Manifest.

PILOTAGE: Pilotage on entry and leaving is carried out by the Seine Pilots. Request for a Pilot must be made 12 hours in advance by radio or telephone, either to the Port Captaincy of Trouville-Deauville or to the Pilotage Office for the Seine at Le Havre or at Rouen. Vessels bound for Trouville/Deauville anchor in the "Rouen Waiting Area" roads at Carosse where they take on the Pilot. It is recommended to anchor near the pilot boat of Rouen and contact her by VHF for instructions.

ANCHORAGE: The best one is Rade de la Carosse (49° 27′ 30″ N. 0° 01′ E.).

RESTRICTIONS: No restrictions at night time. Draft allowed 2.80 m. neap tides, 4.0 m. spring tides, Entrance is dangerous with wind from N.W. to N. over force 6.

Access channel has a depth of 2.80 m. and dries out (zero on French charts). Lock gates are opened about 2 hours before time of commencement of flood tide at Le Havre. Lock gates are closed 2.5 hours after time of commencement of flood tide at Le Havre. The fore port and river quays at Trouville are uncovered at low water. The Trouville fishing port is one where craft are beached.

MAX. SIZE: Length: 210 ft. (64 m. OA); breadth: 45 ft.

RADIO: Radio-Boulogne FFB.

TUGS: No tugs available.

STEVEDORES: Loading and discharge by shore crane.

MEDICAL: All hospital facilities available.

DENSITY: 1025.

FRESH WATER: Available from quay.

FUEL: Small quantity by tank-lorry on demand.

CONSULS: See "Caen" or "Le Havre".

REPAIRS: Small repairs only.

AIRPORT: Deuville St. Gaitien 3 miles away.

AUTHORITY: Commandant du Port.

AGENT: See "Paris."

NOTES

Please also advise Shipping Guides Ltd.

French Antilles

BASSE TERRE, Guadeloupe: 15.59 N. 61.44 W.

(See Plan Book)

SHIPMASTER'S REPORT: August 1978

DOCUMENTS:

6 Crew Lists
6 Manifests
Health Declaration Form
6 Lists of stores on board
Passenger List
Clearance from last port

PILOTAGE: Not available.

ANCHORAGE: On an 18 fathom bank North of the pier 2 cables from the shore.

RESTRICTIONS: Vessel can berth and unberth at any stage of the tide, but if vessel's first call, recommend berthing during daylight only.

MAX. SIZE: Max. LOA 155 m. Max. beam 22 m. There is 32–36 ft. alongside but an allowance should be made for a 3 ft. swell, therefore would suggest max. draft approx. 29 ft.

HEALTH: Authorities require 24 hours notice of the vessel's arrival.

RADIO: Fort-de-France call sign "FFP" (high frequency) and Destrellan call sign "FFQ" for medium wave.

VHF: Port Authority on VHF Channel 16.

TUGS: Not available, however a small boat will assist in running lines if the Port Authority is advised in sufficient time on VHF Channel 16.

BERTHING: Length of banana wharf is about 132 m. it is a concrete wharf and well fendered. The banana elevator is only 4 ft. in from the quay. Vessels berth port side alongside. One berth only available which is used for loading bananas. Distance from sea to berth 2 miles. Least depth of water in channel from sea to berth 40 ft. Mean tidal range at berth 6 in.–1 ft. Nature of the bottom at berth – shingle. There are 5 elevators available for loading bananas through the hatches and conveyor bands for loading through the side doors. No cranes available, 1 fork-lift available, capacity 25 tons, loading rate for bananas 550 to 700 cartons per gang per hour.

During the hurricane season (July-November) the banana elevators are removed from the vessel each night when cargo operations cease. There are 2 mooring buoys in line with the ends of the wharf, 200 m. offshore, to assist the vessel to leave the berth when strong onshore winds are blowing.

The 5 elevators run along a rail track and because they are only 4 ft. from the edge of the wharf, great care must be taken when berthing vessels with any sort of flare along the ship's side. Because of the swell and offshore winds make sure the vessel is well made fast with a good drift on all lines.

A shoal area exists ahead of the vessel when lying port side alongside, on leaving the wharf it is advisable to let go aft, heave away on the headlines, cant the bow in, and then move away from the wharf astern before attempting to steam ahead and to starboard away from the shoal area.

STEVEDORES: Each gang consists of 20 men. Working hours: 0700-1100 hrs. and 1300-2100 hrs.

FRESH WATER: Available.

MEDICAL: Doctors and hospital available.

DENSITY: 1025.

CONSUL: None, nearest consuls at Pointe-a-Pitre.

SERVICES: Fresh provisions, groceries and meats available. The following are not available: repair facilities, dry dock, machine shop, airport, surveyors, laundry services, bunker fuel oil, diesel oil, lubricating oil and slop tanks.

WEATHER: The swell is between 3 and 4 ft. from a S.E. direction. The wind is mainly from an Easterly direction.

DEVELOPMENTS: Work is in progress to lengthen the wharf by 200 m.

POINTE-A-PITRE, Guadeloupe: 16.13 N. 61.32 W.

DOCUMENTS:

6 Manifests. See (a).
6 Crew Lists.
3 Stores Lists.
3 Crew Declaration. See (b).
6 Passenger Lists.
4 Declaration of Health.
2 Bills of Lading.
1 Clearance from Last Port.
6 Entrance Declaration.

(a) In addition, 2 sets of Manifests must be airmailed to arrive 72 hours before arrival in Pointe-a-Pitre.

(b) This Declaration must indicate all new and used personal effects.

PILOTAGE: Pilot meets vessels at "Mouchoir Carre" buoys. Advance notice of ETA to be passed 72, 48 and 24 hours, and VHF Channel 16, 1 hour before arrival.

ANCHORAGE: Consult charts.

RESTRICTIONS: Max. length 210 m., max. tonnage 26,000 g.r.t. Max. draft 9 m.

MAX. SIZE: See "Restrictions".

HEALTH: Port Health board on arrival.

RADIO: Destrellan Radio, also on VHF.

TUGS: None available.

BERTHING: 9 berths available, 6 additional for petroleum, sugar, cement, flour mill and bananas.

Quay No. 1	150 m.	Quay No. 5	150 m.
,, ,, 2	180 m.	,, ,, 6	170 m.
,, ,, 3	145 m.	,, ,, 7	150 m.
,, ,, 4	145 m.	,, ,, 8	150 m.

STEVEDORES: 24 hours advance notice of ETA required (72 hours if vessel arrives on Monday). Working hours 0700–1100 and 1300–1700.

MEDICAL: Clinics and Hospital facilities available.

TANKERS: Only tankers having less than 9 m. draft can enter the harbour.

FRESH WATER: Available day and night if requested in advance.

FUEL: Available F.O. 350 seconds Redwood, D.O. for gas oil. Delivered by road tankers.

CONSULS:

Belgium
Denmark
Ecuador
Great Britain
Haiti
Italy
Lebanon
Netherlands
Norway
Spain
Sweden
Venezuela

REPAIRS: Workshops available.

GANGWAY/DECK WATCHMEN: Available on request.

HATCHES: Usually opened and closed by crew. Stevedores will at Master's request but at ship's expense.

CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle per man.

CARGO GEAR: Ship's gear used.

REPATRIATION: All facilities available.

AIRPORT: 3 miles from the harbour with daily flights to Paris, Miami and New York.

TIME: GMT minus 4 hours. No alterations during the year.

HOLIDAYS: New Year's Day; Shrove Tuesday; Ash Wednesday; Carnival; Good Friday; Easter Monday; Labour Day (1st May); Ascension Day; Whit Monday; National Day; (14th July); Souls' Day; Armistice; Christmas Day.

POLICE/AMBULANCE/FIRE: Police: 82.00.05 or 82.13.17; Ambulance: 82.03.96; Fire Department: 82.00.28.

SHORE LEAVE: Permitted.

IDENTIFICATION CARDS: I/D or passport required.

REGULATIONS: No particular regulations.

DEVELOPMENTS: 1 deep-water berth length 300 m. for container terminal, 1 berth length 160 m.

AUTHORITY: Guadeloupe Port Authority.

NOTES

Please also advise Shipping Guides Ltd.

Gabon

CAPE LOPEZ: 00.38 S. 08.43 E. (See Plan Book)

DOCUMENTS:

3 Crew Lists.
3 Passenger Lists.
3 Lists of Ports of Call.
2 Manifest of Ship's Stores.
Clearance from Previous Port.

PILOTAGE: No official radio station. Pilotage not necessary to approach Port Gentil Roads.

For the private tanker ports at Pointe Clairette and Cape Lopez, pilotage is compulsory. On Cape Lopez Roads Pilot will board vessel in position 0° 37′ S. 8° 44′ E., in a launch carrying proper Pilot signals. The Mooring Master will stay on board throughout the vessel's time in port to assist in mooring, hose handling and loading operations.

ANCHORAGE: The whole of Baie du Prince is a good anchorage, sheltered from winds from S.S.E. through W. to N.W. Depths about 55 m., hard sand, good holding ground. 2 buoys mark the 10 m. line to the South. The waiting anchorage position is 2 nautical miles in a 075°. direction from Cape Lopez lighthouse. Depth of water 70 m.

It is necessary to guard against violent tornadoes occurring between December and May coming from the East or the North. These tornadoes occur very suddenly and are extremely strong.

MAX. SIZE: 250,000 d.w.t. and LOA 340 m. Max. draft 20.50 m. (67 ft.).

Minimum size of vessel: LOA: 215 m. (Approx. 35,000 d.w.t.).

RESTRICTIONS: Berthing is effected only in daylight hours. Vessels which arrive between 1730 hrs. and 0600 hrs. local time should anchor 2 miles – 075° from Cape Lopez lighthouse so as to facilitate moving to the moorings. Unberthing is effected by day or night.

Berthing is not effected in rough weather. At the berth mooring lines must be in good condition and well tended. In case of storm or tornado loading operations must cease and vessel be prepared to leave the berth if so directed by the Terminal Superintendent or Pilot.

RADIO: *Libreville Radio:* Call sign: "TRA" keeps watch on 500 kc/s. and 2182 kc/s. from 0600–1800 hrs. GMT.

Arrival advice: Advise Agent 48 hours and 24 hours before arrival, also if any appreciable alteration thereafter.

VHF: Before vessel's arrival watch is kept on Channel 16. During loading and mooring watch is kept on Channel 6.

TUGS: Owned by Elf-Gabon can be contacted on 2182 kHz. or VHF 16. Ship tow lines are not required, 4 tugs are available up to 1,800 h.p. There are 2 launches for handling mooring lines.

BERTHING: Anchors are not required for mooring operations but must be ready for emergency case. Vessel berths port side alongside. Depth of water along the berth is from 25 to 31 m. Mooring ropes used as follows: fore and aft 3 headlines, 2 breastlines, 2 springs. 2, 3, or 4 tugs are used for mooring operations, in accordance with the d.w.t. Vessel's engines must be ready for immediate operation all the time vessel is at the berth. 2 or 3 tugs will remain standing by. Ship's gangway is not required, an automatic one is supplied by Terminal.

Hose Handling: 5 arms. Diameter of load line 12 in. – 16 in. Loading rate: 12,000 cu.m.p.h.

Loading: Communication between ships and shore loading installations, in any case (loading, fire, etc.), will be effected on VHF Channel 6.

Notice of Readiness: To Elf-Gabon.

BALLAST: Vessels must arrive with clean ballast only. There are no facilities for discharging dirty ballast at the terminal. In no circumstances should dirty ballast be pumped overboard.

MEDICAL: Doctors and hospital facilities available. All vaccinations can be arranged.

DENSITY: Varies between 1021 and 1025.

FRESH WATER: Can only be provided in case of absolute necessity by barge on Port Gentil Roads.

FUEL: 1,500 secs. and 3,500 secs. fuel can be supplied by barge subject to 48 hours notice.

CUSTOMS ALLOWANCES: No restrictions for quantities tobacco and spirits held on board the ship. It is prohibited to allow dutiable articles to leave the ship.

CONSULS: France. Tel. 2086.

REPAIRS: There are facilities for hull and engine repairs for barges and river craft. Slipway for vesels up to 300 tons.

AIRPORT: Can be reached in 15 minutes by road. Regular services to Europe every day.

TIME: GMT plus 1 hour all the year round.

HOLIDAYS: Holidays do not affect tanker working.

POLICE/FIRE/AMBULANCE: Police tel. 17; Fire tel. 18; Ambulance tel. 23-33.

REPATRIATION: Facilities available. Contact ship's Agent.

SHORE LEAVE: Crew members are allowed ashore. There is no regular immigration control but identification papers should be carried.

SHIPMASTER'S REPORT: 1977

This vessel is an OBO carrier of 159,250 d.w.t. and called for a part cargo of 85,000 tons of Mandji Crude.

Mandji Crude has an API of between 30.0 and 30.4 and was on this occasion loaded at 97°F.

It appears to be wax free and has a slight suspended water content.

Vessel size: Accepts vessels from 35,000 d.w.t. to 250,000 d.w.t., max. sailing draft is 67 ft.

Berth: Berth face about 420 ft. long with connected mooring posts. "Floating" type fender piles. Pilots are cautious of impacts as berth is piled into very deep soft mud. Moorings on our visit were: Forward: 3 head lines, 2 breast ropes and 2 springs. Aft: 3 stern lines, 2 breast ropes, and 2 springs. (See Plan Book).

The springs were sent ashore first, fore and aft.

All lines are run, 1 at a time, by mooring boat, and there is no problem running wire rope moorings.

There is a shore gangway mounted on a tower.

Load Rate: Total max. rate of 12,000 t.p.h. using 4 chicksan loading arms. The connections are 16 in. and hydraulically coupled.

Berthing: Straight forward operation, no significant currents, vessels tie up bow out, port side to jetty.

Berthing Operations: From end of passage to all secure was accomplished in just over 3 hours, from Pilot aboard to secure took 2 hours.

Connection of the loading arms used by this vessel took 1 hour.

From commencement of singling up to Pilot away took 1.5 hours.

Tugs: There are 2 modern 3,000 h.p. Kort Nozzle tugs and 1 older tug of 2,000 h.p. stationed in the port. The larger tugs made fast fore and aft, and the smaller pushed midships. On sailing only one of the larger and the smaller tug were used. The tugs normally use their own lines and remain fast until mooring is completed.

Weather: Mild and pleasant apart from tornadoes which occur from October to May, but especially February, March and April.

These spring up without notice to very violent winds in minutes, and though it is understood loading may be suspended, the tugs are used to assist vessel to remain on the berth if required.

Bunkers: A bunker line is being installed on the jetty, a barge is used temporarily, but it is understood that delays can be expected in taking bunkers, and they must be ordered beforehand from Elf Paris.

Fresh Water: Said to be available by barge from Port Gentil.

Usage: According to the Pilot, about 12 ships a month use the berth.

Slop Reception: There are no facilities, vessels must arrive with clean pumps and clean lines.

Radio: Tugs and Pilot are on VHF 16 and Marine and Terminal Operations are on VHF 6.

Repairs: Doubtful if any repairs could be undertaken, possibly in emergency the refinery workshops would assist.

Communications: There are regular daily flights to Libreville, and connections from there worldwide with minimal delay. Flight time Cape Lopez to Paris is said to be 7 hours.

Crew Changes: Could be carried out easily from a point of transportation, but Port Gentil only has 1 hotel and 1 guest house and they are stated to be full to capacity at all times.

Medical Service: Could not be obtained because vessel berthed on Saturday. However, there is a hospital.

Chandler: The port has a chandler, but there is no local produce whatsoever, all vegetables, etc., being airlifted from France and prohibitively expensive.

Cargo: Mandji Crude at loading temperature 95° to 100°F., API 30.25, has slight percentage suspended water.

Shore Leave: Permitted, but walking through the installation is forbidden for security reasons, and transportation is apparently difficult to obtain.

General: I understood no clearing or formalities are completed until vessel is berthed.

Pilotage: Mooring Master now performs pilotage only and leaves after berthing.

Accommodation: No longer required to provide accommodation for shore people.

AUTHORITY: Elf Gabon, Port Gentil.

AGENT: Socopao-Gabon BP 560, Port Gentil. Tel. 52491. Cables: "Freight Portgentil". Telex: 8223.

GAMBA: 02.50 S. 09.59 E. (See Plan Book)

SEA TERMINAL: SBM.

DOCUMENTS:

Last Port Clearance.
2 lists of Last Ports (during last month).
2 Stores Lists.
2 Crew Lists.
2 Personnel Effects Lists (Not compulsory but advisable).
1 Notice of Readiness.

APPROACHES: The approaches to the terminal are open deep water. Gamba sea terminal fairway buoy is located in position 2° 50.1′ S. 9° 56.5′ E. Black buoy. Group Occ(2) 10 secs. Visibility 4 miles.

The single buoy mooring is located in position 2° 50.1′ S. 9° 58.9′ E. and exhibits a white flashing light, visible for 5 miles.

Gamba Lighthouse: Lattice tower. Red and white. Height 47 m. Green flash 2/10 secs. Visibility 21 miles. Position, Lat. 02° 47.0′ S. Long. 10° 01.4′ E.

READINESS: The notice of readiness will be received and accepted by the Berthing Master at the anchoring time if the ship is delayed on request of the Terminal (scheduled delays, awaiting cargo, awaiting orders, weather conditions, etc.) or at the time of mooring if the ship is berthed on arrival.

PILOTAGE: All tankers mooring at Gamba SBM must use the Shell Gabon Pilot who should also be used for unmooring.

Berthing Master boards tankers at the following position: Lat. 02° 50.0′ S., Long. 09° 57.0′ E.

The Berthing Master and his assistant will remain on board throughout loading. The Berthing Master also acts as ship's Agent and focal point for liaison with the shore; communications with the terminal by VHF (portable sets for ships not equipped with VHF are supplied).

The pilot boat/mooring launch which assist mooring/unmooring will stand by throughout loading. For this purpose a mooring rope will be provided aft, by the tanker.

ANCHORAGE: 1.5 miles N.W. from SBM in 60 ft. depth. Vessels anchor without assistance.

RESTRICTIONS: Heavy swell and tornadoes (October to May tornadoes can come from any direction and are always dangerous).

MAX. SIZE: Draft only factor, max. 44 ft.

HEALTH: When advising ETA include in message whether any sickness on board. In case of emergency vessels should call before or after loading at Port Gentil for medical attendance or for crew changes. For this purpose send separate message to "Marine Gamba" and to Agency.

RADIO: Established contact with Gamba Radio (call sign TRP 8) soon as possible. ETA should be sent at least 4 days before arrival in Gamba to "Marine Gamba" via Gamba Radio. Thereafter keep close contact on telephone with Gamba Radio MF (2182) and VHF Channel 16.

Gamba Radio (TRP 8) Service:

Telegraphy A1	500 W Watch on 0700 to 0900 hrs.
Telegraphy A1	2 kW
13070 kH	General call and TFC list at 0900 hrs. Listen on 12 mHz band from 0900 to 0930 hrs. and on 16 mHz band from 0930 to 1000 hrs. Range about 6,000 miles.
6510 kH	General call and TFC list at 1300 hrs. Listen on 6 mHz band from 1300 to 1330 hrs. and on 8 mHz band from 1330 to 1400 hrs. Range about 1,000 miles.
Telephony A3	2 kW
VHF 6 3	Maintains watch on 2182 kHz from 0800 to 0900 hrs. and from 1400 to 1500 hrs. Working frequencies 1877 kHz-2678 kHz. Range about 300 miles depending on atmospherics.
VHF F 3	50 W. Call sign "Marine Gamba". Watch on Channel 16. Working on Channel 16. Range about 50 miles.

24 hours service in French language. Watch in English language during office hours (0600 to 1100 hrs. and 1300 to 1515 hrs.).

Pilot Launch Service	
	20 W Watch on Channel 16 (when at sea). Range about 20 miles.
Terminal Gamba	
	20 W Watch on Channel 16. Working on Channel 11. Range about 20 miles, used only for loading operations.

Radio Beacon: Continuous airplane radio beacon call sign GZ, frequency 359 kHz. Position: Lat. 02° 46.8′ S. Long. 10° 02.3′ E.

N.B. All hours in GMT.

BERTHING: Berthing takes place both by day and by night. If a Shipmaster refuses to berth by night, delays will be charged to his vessel.

Depth and draft: Depth at berth: 59 ft. From this figure must be deducted the height of the manifold which is 5 ft., thus leaving a controlling depth of 54 ft. A nominal underkeel clearance of 10 ft. is allowed to take account of ship movement caused by swell. This leaves an approved safe draft of 44 ft.

SBM Description: The buoy is 8 m. in diameter, 4 m. high. A double 16 in. manifold is provided on the turntable (one pipe is blanked) 90° clockwise from the tanker securing point. The SBM is moored by means of 8 chains which are secured to the seabed by 120 tons holding power anchors.

MOORING: Recommended that vessel should be trimmed max. 8 ft. by the stern on arrival.

Ships must have ready on the forecastle, and before approaching the SBM, four synthetic mooring lines lashed two by two each side. These mooring lines will be connected to the pickup wires by the mooring launch by means of shackles and heaved up until the triangular plates are on board and are in turn connected to the mooring wires by means of forelock shackles. If vessel is not fitted with central fairlead, the most forward fairleads on either side will be used.

Vessels moor with two 12 in. nylon ropes (length 33 m.) from SBM secured on board ship by two 2.25 in. chain cables plus two 3.25 in. wires which provided by terminal. Berthing Master will advise in detail mooring procedure.

LOADING: A derrick should be rigged with double whip and topped on the port side for loading mooring equipment and hose lifting.

Shore Line System: SBM – 1×28 in. submarine pipe-line (total length to Terminal 7.3 km. (24,000 ft.)). Reduced to 12 in. for connection to ship's manifold (total length of floating hoses: 720 ft.).

Gamba Crude Characteristics:

Density at 15° C:	0.8663	Salinity:	20 to 35 Mg/Kg
API at 60° F:	31.75	Cloud point	39° C
BSW:	0.40%	Wax:	18%

Connection/Disconnection: Connection and disconnection are carried out by ship's crew with advice from Berthing Master. The hose is connected amidship on portside and is ended by a 12 ins. reducer having A.S.A.B. 165 flanges.

If there are no suitable reducers available on board, Gamba Terminal should be advised by radio giving size of ship's manifold and pitch of bolt holes.

Loading: During the loading the Berthing Master remains on board and acts as Loading Master. He is in permanent contact with terminal by VHF.

If necessary the pumping rate can be reduced at any moment. The Loading Master will be advised at least one hour before the completion of the loading. The average loading rate is 2,700 cu.m. per hour.

Papers: The Loading Master receives by VHF shore figures from the Terminal about one hour after the completion of the loading. All documents are completed before the departure of the ship. Two sets of documents are delivered to the Master: one for his own purpose and one for the Consignee.

Engines: Engine immobilisation is forbidden at the SBM. Engines should be kept ready for use at any time at the Berthing Master's request.

MEDICAL: No medical or dental facilities at Gamba (See "Health").

DENSITY: 1025.

FRESH WATER/FUEL: Not available.

REPAIRS: No facilities available.

BALLAST: There are no facilities for discharging ballast ashore. Vessels must arrive at the loading terminal with clean ballast only, apart from contents of the slop tank.

GANGWAY/DECK WATCHMEN: Not required.

CUSTOMS ALLOWANCES: No restrictions on Tobacco/Wine.

IDENTIFICATION CARDS: Not required.

CONSULS: None, French consul in Port Gentil.

REPATRIATION: Facilities available.

AIRPORT: Gamba airport is local airstrip and is connected to Port Gentil by daily service (Except Sunday). Port Gentil airport is connected to Libreville International airport by daily services. Mail reaches any European country within seven days.

TIME: GMT plus 1 hour throughout the year.

GENERAL: The use of Channel VHF 9 is forbidden.

SHORE LEAVE: Not allowed.

AUTHORITY: Shell Gabon, Port Gentil (Gabon).

AGENT: See "Port Gentil".

LIBREVILLE: 00.23 N. 09.26 E.

PORT LIMITS: The seaward boundaries of the port within which a vessel is considered to be an "arrived ship" and (subject to C/P terms) laytime will commence is 2 miles off shore at Libreville harbour.

DOCUMENTS: See Port Gentil.

PILOTAGE: None available.

ANCHORAGES: Bottom of roads in Libreville slopes very gently down towards open sea. The greater the vessel's draft, the further out it must moor. E.g., ship of 7 to 8 m. draft will be moored approx. 1,500 m. from Harbour Pier. Ship 5-6 m. draft will be able to approach the Harbour Pier as near as 500 to 600 m. For reasons of safety, forbidden to come nearer, particularly during tornado season – February to May and September to December.

RESTRICTIONS: No restriction imposed on entering or leaving the Estuary. Channel marked by 5 buoys provided with radar reflectors and flashing lights. Sixth buoy, called a "landing buoy" moored in roads, where vessels moor.

HEALTH: If there is sickness on board, Health Service warned by Consignor of vessels. Health Service can go on board to check state of crew's health. Immigration Service can also board to check crew list and condition of passengers, if any.

RADIO: *Libreville Radio:* Radio-telephony from 0600 to 1800 hrs. GMT on 2182 kc/s, Radio-telegraphy from 0600 to 1800 hrs. GMT on 500 kc/s, call sign TRA 22; from 0800 to 0830 hrs.on 13101 kc/s, call sign TRA 8; from 1630 to 1700 hrs. GMT on 8722 kc/s, call sign TRA 8.

TUGS: Tugs intended only for towing lighters, horse power 150 to 250, unsuitable for any harbour towing.

BERTHING: Only for lighters and small coasters with a draft of less than 3 m. Crews working unloading or loading of vessels in roads supplied by Consignor of the ship. Harbour Services have no radio apparatus. Shipping companies all have radio-telephone extensions, which allows them to be in permanent contact with vessel moored in roads. Unloading or loading operations of goods carried out by lighters which, towed by small tugs, ensure rotation between vessel in operation and quay. All this equipment belongs to shipping companies dealing with consignment of vessels in the roads. Every vessel arriving in roads must have its consignor.

STEVEDORES: Available.

MEDICAL: Hospital available, and in case of necessity, patient or patients will be admitted.

FRESH WATER: Water supply real problem, as there is no tanker to transport it. Therefore strongly recommended that any ship touching Douala coming from the North or Pointe-Noire coming from South, should fill up at one of these ports.

FUEL: There are fuel-tankers belonging to shipping companies. The ship-tanker which provisions Libreville 2 or 3 times a week is brought alongside buoys in roads, at 1,650 m. (position: Lat. 0° 23′ 51″ North, Long. 9° 25′ 71″ East); fuel is transhipped by sea-line to tank on shore.

FIRE PRECAUTIONS: No special precautions.

GANGWAY/DECK WATCHMEN: Carried out by crew.

OPENING/CLOSING HATCHES: This is done with the tacit agreement of the ship's Officer and the Consignor.

CARGO GEAR: Ship's own gear used.

IDENTIFICATION CARDS: Required.

CONSULS: None.

REPAIRS: Small repairs possible.

DRY DOCKS: None.

REPATRIATION: No facilities.

AIRPORT: 9 km. from the harbour. Links with French-speaking Africa, Switzerland, and France, also Johannesburg.

TIME: GMT plus hour.

HOLIDAYS: 17th August, Independence of Gabon; 1st May, Labour Day – these are the only holidays in force.

SERVICES: None.

SHORE LEAVE: Allowed.

DELAYS: First come, first served method.

AUTHORITY: Capitainerie du Port.

AGENTS: Socopao-Gabon, B.P.4., Libreville. Tel. 72.21.40 and 72.21.53. Telex 5252. Cables "Freight Libreville".

LUCINA MARINE TERMINAL: 03.40 S. 10.46 E. (See Plan Book)

DOCUMENTS: See "Gamba".

APPROACHES: Navigation aids:

West buoy: Gp. Occ. (2) 10 secs. 03° 40.0′ S., 10° 44.3′ E. Black and white buoy showing West marker and radar reflector fitted.

North buoy: Gp. flashing (3) 10 secs. 03° 38.5′ S., 10° 45.7′ E. Black and white buoy showing North marker and radar reflector fitted.

East buoy: Gp. flashing red (3) 10 secs. 03° 40.0′ S., 10° 47.3′ E. Red and white buoy showing East marker and radar reflector fitted.

Platform LD 2: The beacon of this platform consist of two white Morse code lights: letter U.

Platform LD 1: One white Morse code light: letter U. The flare installed on the Production platform LP 1 is very conspicuous.

SBM light: Position: Lat. 03° 39.6′ S., Long. 10° 46.2′ E. One flash 0.3 secs. each sec. Visibility 5 miles.

Storage tanker: The storage tanker is showing the lights of a ship at anchor. During the hours of darkness all deck lights are switched on.

NOTICE OF READINESS: See "Gamba".

PILOTAGE: Berthing Master boards vessel in position Lat. 03° 39′ S., Long. 10° 44′ E. Also see "Gamba".

ANCHORAGE: Vessels must anchor without assistance. Recommended anchorage: in 19 fathoms about 1.5 miles North West of storage tanker.

RESTRICTIONS: No draft restrictions. Depth of water can be assumed to be 114 ft.

HEALTH: See "Gamba".

RADIO: All messages sent to "Marine Gamba" through Gamba Radio TRP 8 (see Gamba).

ETA: Should be sent to "Marine Gamba" via Gamba Radio. First ETA should be sent at least 4 days before arrival.

VHF: Vessels should call Marine Gamba on Channel 16 during office hours when passing Gamba area. Permanent watch on Channel 12, on the storage tanker and the mooring launch.

BERTHING:

Description and Location: The development consists of six oil producing wells, which are protected by two single four-pile platforms, LD 1 (03° 41′ S., 10° 44.3′ E.) and LD 2 (03° 41.8′ S., 10° 45′ E.). Production facilities are located on four-pile platform LP 1 which is connected by a bridge to the adjacent platform LD 1. A 35,000 TDWT tanker, s/s "Volvula", which serves as floating unit of storage, is moored by means of ten anchors in position 03° 40′ S., 10° 45.8′ E. The tanker is connected with a SBM via a submarine line, length 1 km.

SBM description: The buoy is 8.5 m. in diameter and 4 m. high. Connections for submarine lines from the FUS are provided on the bottom of the centre swivel section which is free to rotate. (Other details same as Gamba).

Nylon moorings: Vessels moor with two 15 in. nylon ropes from the SBM and are secured on board ship by two 56 mm. dia. stud link chains plus two 3.25 in. wires which are provided by the terminal. Both nylons are 45 m. long.

Floating hose and submarine line: 1×20 in. submarine pipe-line, length 1,100 m. from the FUS. SBM connected to 1×16 in. floating line reduced to 12 in. for connection to ship's manifold. Total length of floating hoses: 860 ft.

Mooring: See "Gamba".

LOADING: *Lucina Crude Characteristics:* Density at 15° C.=0.8258; API at 60° F.=39.8; B.S.W.=Nil; Salinity=3 to 5 mg/kg; Cloud point=27° C.; Wax=14%.

Loading rate: Average loading rate 2,400 cu.m.p.h.

Connection/Disconnection: See "Gamba".

DEBALLASTING: See "Gamba".

FRESH WATER: Not available.

FUEL: Not available.

REPAIRS: No facilities. Engines not to be immobilised whilst at the SBM.

REPATRIATION: Not possible.

TIME: GMT plus 1 hr. throughout the year.

SHORE LEAVE: Not allowed.

AUTHORITY: Shell Gabon, Port Gentil.

OVENDO: 00.17 N. 09.30 E. (See Plan Book)

SHIPMASTER'S REPORT

Vessel, length 156 m., breadth 22.0 m. Draft (at the time, 30 ft.).

APPROACHES: The channel buoys showed very well on radar on the 3 and 6 miles ranges, even during heavy rain, but the lights on the red buoys are poor and all buoys occasionally unlit.

ANCHORAGE: Depths in the channel and river were found to be as stated during low water with a depth of 33 ft. over all the anchorage. Maximum draft allowed at this time was 30 ft.

The holding ground is good, 4 shackles were used for a total ship weight of 19,000 tons plus a small coaster alongside.

The tides are regular with only a very short slack water period, and run at between 4 and 6 knots.

PILOTAGE: There are 2 French Pilots who may be contacted on VHF Channel 16 when in range, they are ordered by the Agent to berth vessels only, although they will pass on advice to vessels regarding anchoring.

TUGS: There is 1 tug of approximately 1,000 h.p. which assists in berthing, either towing or pushing.

BERTHING: Well fendered modern concrete quay, 450 m. in length, laid out as per plan in the Guide. The normal practice is for there to be 2 ships of around 150 m. and one smaller ship alongside at one time. The inshore side of this quay is for small craft only.

Depths alongside Berth No. 1, 23 ft.; No. 2, 18 ft. and No. 3, 22 ft.

FRESH WATER: This is obtainable while alongside the quay but only in a dire emergency at the anchorage from the tug which can supply up to 8 tons.

REPAIRS: Only very small repairs are possible and it is suggested that a receipt is obtained for any parts sent ashore.

REPATRIATION: There are 2 planes a week from Libreville to Paris and approximately 12 planes weekly to Abidjan.

SHIPCHANDLER: There is no chandler for any form of stores, the only possibility being self-purchase at the local (Libreville) supermarket. All goods are imported and therefore very expensive.

HOLIDAYS: 12th March. Gabonese independence.

MARINE CLUB: There is a marine club about 1 km. from Ovendo in the Libreville direction (swimming pool, etc.).

AGENT: See "Libreville".

PORT GENTIL: 00.43 S. 08.48 E.

On the coast of Lopez Island.

APPROACHES: Buoyed channel, lit at night. Min. depth 15 m.

DOCUMENTS:

Cargo Manifest.
Store List.
Crew's Personal Effects List.
Crew List.
List of Ports of Call (not compulsory).
Health Certificate.
Ship's Official Papers.

PILOTAGE: No Pilot necessary. However Port Authority will arrange Pilot if given 12 hours notice. Pilot boat is a tug. Pilot taken on board at bank buoy.

ROADS/ANCHORAGES: Ships having commercial operations carry them out at anchorage on a line with anchorage buoys (reserved for lighters and tugs) 1 mile S.E. of the Mole in depths 10 to 20 m. 1,500 acres (approx.) of safe shipping anchorage.

Anchorage for several ships of deep draft well sheltered from predominantly S.W. winds during months June, July, August and September. During season of tornadoes (January to end April) which blow from N.E. a fairly heavy sea quickly rises and vessels should anchor at least 600 m. from land.

Max. rise of tide 2 m. 2; average 1 m. 70; min. 0 m. 40.

RADIO: Libreville radio. R/T 2182 kc/s. – Harbour Master.

TUGS: Not required.

BERTHING: No berths. Loading and discharge at anchorage carried out by lighters and flat-bottomed boats. Boat Quay (Mole) has length of mooring quays (suitable only for flat-bottomed lighters and tugs) of 200 m. and depths of 2.50 m. at low tides. Total Mole area approx. 5 acres, comprises Customs Zone with warehouses, offices, wharves, etc.

MEDICAL: For attendance call Harbour Master R/T 2182 kc/s. Smallpox and yellow fever inoculations required.

TANKERS: To N.E. of Mole is petrol pipe-line unloading point for small tankers, tying up on buoys, max. length 70 m., 5 m. draft. Prince's Bay, loading point for unrefined petrol by sealine is available to North of Prince's Bay (see "Cape Lopez").

FRESH WATER: Delivery by lighters, capacity 200 tons. Loading time 2 hours.

FUEL: 3 days notice required. Fuel oil viscosity 1,500 and 3,500 seconds Redwood available. Delivery by 200-ton tankers, every 5 hours.

WATCHMEN: Not necessary.

HATCHES: Opened and closed by crew.

CUSTOMS ALLOWANCES: No limitations on tobacco, wine or spirits.

CONSULS:

Switzerland		Tel. 20–19
Holland	BP. 792	Tel. 28–09
France	BP. 511	Tel. 20.86
Sweden	BP. 518	Tel. 21.71

REPAIRS/DRY DOCKS: Not available.

REPATRIATION: Obtainable on medical grounds. No facilities for crew changes.

AIRPORT: 4 km. distant. Regular services.
TIME: GMT plus 1 hour. No alterations.
HOLIDAYS: No work on Independence Day 17th August.
SHORE LEAVE: Permitted.
AUTHORITY: Capitainerie du Port.
AGENT: Socopao–Gabon, B.P. 560. Tel. 524–91. Telex 8223. Cables "Freight".

NOTES

Please also advise Shipping Guides Ltd.

Gambia, Republic of

BANJUL: 13.27 N. 16.34 W. (See Plan Book)

DOCUMENTS:
7 Crew Lists.
7 Passenger Lists.
7 Ports of Call Lists.
Health Documents.
Deratisation (or Exemption) Certificate.
Yellow Fever Innoculation Certificates.
Smallpox Vaccination Certificates, all valid.
Customs Crew Declaration.
2 signed copies of Manifest.
Bills of Lading (may be sent in advance of vessel).

PILOTAGE: ETA and draft to be communicated to "Harbour Master Banjul" 48 hours before ETA and confirmed 12 hours before. Vessel arriving Monday ETA preferably not later than Saturday morning.

Pilot station situated in Harbour Master's office has VHF station, calling Channel 16 (156.80 mHz) working Channels 12 (156.60 mHz) and 14 (156.70 mHz). Continuous listening watch kept 0800 – 1500 hrs. Monday – Friday. 0800 – 1300 hrs. on Saturday. Listening watch at weekends if vessels are expected. Reception generally good within 100 nautical miles radius. Pilot boat has grey hull and buff superstructure, exhibiting usual signals.

Pilotage from any point inwards from Fairway Buoy by request, but compulsory from No. 5 Buoy inwards.

ANCHORAGES: Good and spacious anchorages to the East and Southeast of Government wharf in depths of 8 to 15 fathoms.

RESTRICTIONS: Vessels may enter and proceed to anchorage at all times and states of tides. Minimum depth in sea approach channel is 28 ft. LWOS. Average rise of spring tides 6 ft., neap tides 4 ft.

MAX. SIZE: Maximum length 600 ft. maximum draft 27 ft. (Banjul Wharf) 20 ft. (Government Wharf). For vessels anchoring only, length unlimited.

HEALTH: Vessels exhibit the appropriate International Code signals. Port Health Officer usually boards the vessel at the harbour anchorage or alongside between 0800 and 1700 hrs. daily, at all times in case of emergency.

RADIO: Banjul Radio call sign C5G. Radio Telephone 2182 kHz (calling) 2756.4 kHz. 1100 – 1200 hrs., 1400 – 1500 hrs. (weekdays) Sundays – on demand.

RADAR/VHF: No port radar station. Port VHF. See "Pilotage".

TUGS: One tug of 1,000 h.p.

BERTHING: Maximum permissible draft alongside; Banjul Wharf 27 ft. Government Wharf 20 ft. Government Wharf berthing face 294 ft. with 1 dolphin in line 100 ft. from North end. Mooring bollards on foreshore. Banjul Wharf berthing face 400 ft. mooring dolphin each end, set back from wharf face. Inner berth of length 335 ft. suitable for small vessels up to 17.5 ft. draft. Public Jetty berthing face 196 ft. maximum draft 11 ft.

BRIDGES: No bridges.

STEVEDORES: Normally 48 hours notice addressed to Agent. If arriving Monday preferable agent notified requirements latest Friday. Normal working hours 0730 – 1900 hrs.

MEDICAL: Emergencies and cases requiring hospitalisation attended to at all times, giving as much advance notice and information as possible. Other cases attended to as convenient to ships after arrival. For certificates required see "Documents". Inoculation and vaccination yellow fever/smallpox given on request.

TANKERS: Tankers (discharging only) berth on Banjul Wharf. Maximum permissible draft 27 ft. Discharge of residue and bilge prohibited. Ballasting by permission of Harbour Master.

DENSITY: Normally salt water at Banjul, reducing to about 1020 ozs. per cu.ft. during River Gambia flood water period: August – February.

FRESH WATER: Fresh water available at both Government and Banjul wharves from hydrant. Notice of requirements should be sent with ETA. No water barge. D5.00 per 1,000 gallons.

FUEL: Bunkering facilities available at Banjul Wharf through pipeline and road tankers for reasonable quantities. Also available at Public Jetty for small craft (11 ft. draft). Advance notification required for all bunkers.

FIRE PRECAUTIONS: For tankers and vessels carrying explosives Fire Brigade will be in attendance.

DEVELOPMENTS: This envisages the commencement of Phase II of the Banjul Port Project as trade develops and ultimate embarkation of Phase III.

GANGWAY/DECK WATCHMEN: Recommended. By arrangement with Agent.

OPENING/CLOSING HATCHES: Usually done by stevedores.

CERTIFICATES: Registry, Articles of Agreement, Load Line, Safety, Safety Equipment Radio Licence/Certificate.

CUSTOMS ALLOWANCE: Reasonable allowance of wine/spirits and tobacco/cigarettes out of bond, as per Master's request.

CARGO GEAR: In accordance with UK Factories Act. Ship's lifting gear for loading and discharging, also 4×6 ton and 1×30 ton mobile cranes available.

CREWS IDENTIFICATION CARDS: Needed.

CONSULS: In Banjul: Belgium, Denmark, France, Lebanon, Norway, Spain, Sweden. U.S.A. has resident charge d' Affairs and U.K. has High Commissioner. Senegal has resident Ambassador.

REPAIRS: Minor hull, deck and engine repairs and welding undertaken by G.P.A. dockyard.

DRYDOCK: A slipway of capacity of 500 tons displacement is included in the dockyard facilities.

REPATRIATION: Possible.

AIRPORT: Airport 14 miles from Banjul. Regular services.

TIME: GMT kept throughout the year.

HOLIDAYS: New Year's Day (1st January); Independence Day (18th February); Good Friday, Christmas Day, Boxing Day, Islamic Festivals of Eid-El-Fitr (Ramadan) and Eid-El-Kabir. No cargo work on Islamic Holidays.

TELEPHONE: Telephones installed on board at ships/Agent's request.

GENERAL: The Ports Authority operates 3 lighters each of 9,900 cu.ft. capacity. Lighters may be hired for discharging ship at anchor and transhipments up river.

A private company operates a large fleet of lighters, mainly for transporting groundnut from river ports to Banjul. Ships stores: fresh vegetables, beef and fish, fruit (in season) and bonded stores are available.

Other Ports: River Ports: Kaur and Kuntaur at 118 and 150 miles upriver respectively from Banjul. River Pilots available at Banjul. Max. loaded draft 17 ft. 06 in.

SHORE LEAVE: No restriction on normal shore leave.

AUTHORITY: Gambia Ports Authority.

NOTES

Please also advise Shipping Guides Ltd.

German Democratic Republic

ROSTOCK: 54.09 N. 12.08 E. (See Plan Book)

DOCUMENTS:
Health Declaration.
6 Crew Lists.
2 Passenger Lists.
2 Money Lists.
Stores List.
Cargo Documents.
Ship's Certificates.

PILOTAGE: Compulsory. Contact by VHF Channel 16, working Channel 12. Pilot boards at Warnemunde light buoy. International code signals used.

ANCHORAGE: In Warnemunde Roads, off port entrance, in depths of 48 ft.

RESTRICTIONS: Entrance channel from Warnemunde light buoy to Overseas Port at mouth of River Warnow, depth 37 ft. LW.

MAX. SIZE: For Overseas Port: length 230 m., beam 32 m., draft 37 ft. For City Docks: 142 m. length, 21 ft. draft. Also see "Tankers".

HEALTH: Pratique given on arrival. In case suspected disease or fever on board, radio details to Agent before arrival. Complete declaration of health required.

TUGS: Available. Use of at least 1 tug is compulsory for vessels berthing and unberthing.

Sufficient number of tugs available, ranging from 300 to 1,200 h.p. Tugs normally join vessel in front of the mole.

BERTHING: *Overseas Port:* Situated in Lower Warnow River about 3.8 miles from Warnemunde sea buoy.

Pier No. 1: 6 berths General goods depth 30 ft. to 33 ft.
Pier No. 2: 7 berths General goods depth 30 ft. to 33 ft.
Pier No. 3: 4 berths Bulk cargoes depth 30 ft. to 33 ft.
Pier No. 4: 4 berths Bulk, General, Ro-Ro depth 25 ft. to 35 ft.
Oil Pier: 3 tanker berths depth 31 ft. to 37 ft.

City Docks: In Warnow River, about 6 miles from sea. Total quay length 1,600 m. depths alongside 21 ft and 18 ft. Grain elevators shooting capacity 42 t.p.h., suction capacity 33 t.p.h.

Warnemunde: Port for passenger service. Quay length 180 m. Depth alongside 25 ft. 06 in.

Port Control to be contacted through VHF Channel 14.

Roll-on/roll-off terminal with facilities for 20 ft. and 40 ft. containers. Max. draft 25 ft.

CRANES: *Overseas Port:* 64 cranes and crane-bridges with capacity from 3.2-20 tons. A self-propelled floating crane "Goliath", for heavy lifts not exceeding 100 tons is available.

City Docks: Crane capacities 2-10 tons.

BULK HANDLING FACILITIES: 3 berths, length of quay 720 m. Six bridges with 20 tons capacity and outreach of 40 m. Storage area 13,200 cu.m. for 90,000 tons of bulk cargo.

TANKERS: 3 berths available. Max. length 230 m., Max. draft 37 ft.
Berth No. 12, 33 ft. (max. LOA 215 m.)
Berth No. 13, 37 ft. (max. LOA 230 m.)
Berth No. 14, 31 ft. (max. LOA 215 m.)
Storage capacity of 120,000 cu.m. Max. discharge rate 2,900 cu.m. per hour.

MEDICAL: Doctors, hospitals available. Advance notice to Agent required if medical assistance necessary.

FRESH WATER: Available ex-shore hydrants or water-boat.

FUEL: Available all grades fuel and gas oil by barge. Vessels calling for bunkers only, pay no harbour dues, and other fees are reduced.

REPAIRS: All repairs possible. Floating crane available. Neptun Shipyard and other repair shops situated at City Docks. Warnow Shipyard and floating dock situated in Overseas Port.

DEVELOPMENTS: Plans to build a floating island in depth of 21 m. off Rostock to accommodate tankers up to 100,000 tons. Estimated discharge rates up to 3,000 t.p.h. into smaller vessels for transfer to existing oil terminal.

REPATRIATION: Can be arranged if identification papers in order.

TIME: GMT plus 1 hour. No alterations during the year.

HOLIDAYS: New Year (1st January); Good Friday; Easter Sunday; 1st May; Whit Sunday; Whit Monday; 7th October; Christmas Day; 26th December.

AIRPORT: Berlin.

TELEPHONES: Ship-to-shore connections available.

POLICE/AMBULANCE/FIRE: Ambulance 363-3500; Police 366/3333; Fire 366/2222.

SHORE LEAVE: Crew members permitted ashore.

AGENT: VEB Schiffsmaklerei, Rostock, Strandstr 86. Telex: 31265 (Head office). Port office, City Telex: 31265, Tel: 37081 (ext. 2267). Agency Overseas Port, Telex: 31286, Tel: 366-3962/65.

STRALSUND: 54.18 N. 13.06 E. (See Plan Book)

DOCUMENTS: Health Declaration.
6 Crew Lists.
2 Passenger Lists.
2 Money Lists.
Stores List.
Cargo Documents.
Ship's Certificates.

PILOTAGE: Compulsory. Contact Pilot by VHF Channel 14. Pilot stations are at Barhoeft and Thiessow. Pilot boards vessel at Gellen (North-West entrance) and Landtief (Eastern entrance).

Entry only possible from one hour before sunrise to one hour after sunset. (North-west entrance only).

ANCHORAGE: In the roads clear of the fairway, depths 26 to 30 ft.

RESTRICTIONS: Northern entrance between breakwaters is 11 ft. 06 in. depth used by smaller vessels only. Eastern entrance, depth 17 ft. MLW.

HEALTH: Pratique given on arrival. In case suspected disease or fever on board radio details to Agent before arrival.

TUGS: Available and compulsory for vessels of over 1,000 g.r.t. berthing and unberthing.

MAX. SIZE: Vessels up to 17 ft. draft.

BERTHING: Depth alongside quays up to 17 ft. maximum. Length of quays 1,100 m.

CRANES:

2 cranes	10 tons capacity; reach 20 m.
2 cranes	2 tons capacity; reach 20 m.
1 crane	5 tons capacity; reach 22 m.
2 Elevators	capacity 25 t.p.h. each.

Also a conveyor system for handling of salt with a capacity of 60 t.p.h.

FRESH WATER: Available from shore ex pipe-line.

FUEL: Gas oil and lube oil available. By barge.

REPAIRS: All deck, hull and machinery repairs by local shipyards.

REPATRIATION: All facilities exist for changing crews.

AIRPORT: Berlin (Schonefeld).

MEDICAL: Doctors, hospitals available. Advance notice to Agent required if medical assistance necessary.

TIME: GMT plus 1 hour. No alterations during the year.

HOLIDAYS: New Year (1st January); Good Friday; Easter Sunday; 1st May; Whit Sunday; Whit Monday; 7th October; Christmas Day; 26th December.

SHORE LEAVE: Crew members permitted ashore.

AGENT: VEB Schiffsmaklerei Rostock. Agentur Stralsund 23 Stralsund. Hafen – Ballastkiste. Tel. 692362. Telex 0 31 85 24.

WISMAR: 53.54 N. 11.27 E. (See Plan Book)

DOCUMENTS:
Health Declaration.
6 Crew Lists.
2 Passenger Lists.
2 Money Lists.
Stores List.
Cargo Documents.
Ship's Certificates.

PILOTAGE: Compulsory from outer roads to harbour quays. Pilot boards at Wismar sea buoy. International code signals used. Contact by VHF Channel 12.

ANCHORAGE: In outer roads between Hannibal Shoal and Poel Island in depths of up to 40 ft. Protected anchorage in inner roads, depths up to 30 ft.

RESTRICTIONS: Entrance to the port is through a buoyed channel 15 miles long, depth 27 ft. LW. Vessels over 120 m. LOA. enter in daylight only, turning basin 250 m. diameter.

MAX. SIZE: Length up to 170 m. Max. draft 27 ft. Vessels over 165 m. LOA, max. draft 26 ft.

HEALTH: Pratique given on arrival. In case suspected disease or fever on board radio details to Agent before arrival.

TUGS: Available and compulsory for berthing and unberthing.

2 tugs of 800 h.p. Tugs join vessel according to the Pilot's instruction.

BERTHING:

Grain Quay: Max. draft 27 ft., quay length 160 m., 2 grain elevators, grain silos for 20,000 tons.

Potash Port: Max. draft 27 ft., mechanical potash loading plant, quay length 360 m., 3 loaders.

Oil Port: Max. draft 27 ft., max. length 200 m.

Timber Port: Max. draft 25 ft., quay length 400 m., 2 gantry cranes of 3.2 tons, 1 mobile crane (30 tons).

Old Port: Max. draft 16 ft., quay length 140 m., no handling operations, fishing port, waiting berths.

Seaport, Northern Quay: Max. draft 27 ft., quay length 420 m., 5 gantry cranes with a capacity from 3.2 to 12 tons. One mobile crane of 30 tons capacity and one floating crane of 100 tons capacity.

Seaport, Southern Quay: Max. draft 27 ft., quay length 500 m., 3 semi-gantry cranes with a capacity from 3.2 to 10 tons.

FRESH WATER: Available from shore hydrants at all berths.

FUEL: All grades fuel and gas oil obtainable. Vessels calling for bunkers only, pay no harbour dues, and are allowed a reduction in pilotage and clearance fees. 7 days notice required for bunkers.

REPAIRS: All repairs can be effected at Mathias-Thesen Shipyard. Floating crane available, capacity up to 100 tons.

MEDICAL: Doctors, hospitals available. Advance notice to Agent required if medical assistance necessary.

TIME: GMT plus 1 hour. No alterations during the year.

HOLIDAYS: New Year (1st January); Good Friday; Easter Sunday; 1st May; Whit Sunday; Whit Monday; 7th October; Christmas Day; 26th December.

SHORE LEAVE: Crew members permitted ashore.

AIRPORT: Berlin, 270 km. from Wismar.

TELEPHONES: No ship to shore communications.

AGENT: VEB Schiffsmaklerei Rostock, Agentur Wismar, 24 Wismar, Kopenhagener Strasse. Tel. 4208. Telex 0318841.

Germany, Federal Republic of

GENERAL:

RIVER ELBE:

GENERAL INFORMATION ON ELBE PILOTAGE, DEEP SEA PILOTAGE, HELICOPTER AND RADAR SERVICE, ANCHORAGE ON THE RIVER ELBE.

Elbe Pilots for all ports on the River Elbe, Cuxhaven, Brunsbuttel, Butsfleth, Stadersand, HEW-Wedel and Hamburg.

Pilot Vessels: For the inward bound vessels near Elbe 1 light-vessel stationed in approx. position 53° 59.5′ N., 08° 09.0′ E., 2-masted vessel painted black with yellow funnel and "Lotse" in white letters on hull. In bad weather Pilot vessels shift to East of light buoy "9".

Pilot vessel can be contacted on VHF Channel 13 or 16, by flag "G", sound or morse signals.

Land-based radar contact can be requested through radar station "Neuwerk Radar Radio 1", VHF Channel 20.

PILOTAGE: Vessels requiring Elbe Pilot must order same at least 12 hours prior to arrival at Elbe 1 light-vessel by cable to "Elbelotsen Brunsbuttel" (cable address Elblotse Brunsbuttel) via Norddeich Radio, call-sign DAN.

Message must include name of vessel, gross tons, ETA Elbe 1, date 2 figures, time of vessel's arrival 4 figures, draft, vessel's destination. (For example: Eleka 12854 ETA Elbe 1 02 1030 24 ft. 4 in. Kiel Canal). One hour before arrival at Elbe 1 light-vessel Masters are advised to contact the Pilot vessel by VHF Channel 13 or 16.

**Pilotage is compulsory* on the River Elbe to and from Elbe 1 light-vessel for all vessels over 1,000 g.r.t.

Pilotage is compulsory on the River Elbe to and from Elbe 1 light-vessel for vessels over 300 g.r.t. carrying particularly dangerous cargo and, in addition, for vessels over *10,000 g.r.t. carrying particularly dangerous cargo from and to Deutsche Bucht light-vessel. These vessels have to use the Western Approach Traffic Separation Scheme Deutsche Bucht. Pilots for these vessels will be embarked and disembarked at the Deutsche Bucht light-vessel.

*Obligatory pilotage on the River Elbe for vessels exceeding 1,000 g.r.t. and in addition, for vessels over 10,000 g.r.t. carrying particularly dangerous cargo from and to Deutsche Bucht light-vessel is under consideration and is expected to become effective in the course of 1979.

For vessels exceeding 70,000 g.r.t. or 300 m. length or 45 m. breadth the pilotage is generally compulsory on the River Elbe from and to Deutsche Bucht light-vessel, if these vessels use the Western Approach Traffic Separation Scheme Deutsche Bucht. In this case Pilots will embark and disembark at Deutsche Bucht light-vessel only.

Vessels exceeding 35,000 g.r.t. (except container, passenger and warships) have to take 2 Elbe Pilots, but in fog all vessels from 25,000 g.r.t. upwards.

Pilotage district divided into 3 areas: 1st district from Elbe 1 (Deutsche Bucht) light-vessel to Brunsbuttel (entrance of Kiel Canal) 40 miles; 2nd district from Brunsbuttel to Hamburg-Seemannshoft (entrance of Port of Hamburg) 40 miles; 3rd district covers the whole area of the Port of Hamburg. Change of Pilot takes place at Brunsbuttel and Hamburg-Seemannshoft.

Vessels expecting Pilot may wait in vicinity of Elbe 1 light-vessel. No restriction imposed on night entry for any vessels on the River Elbe.

Current velocity 2-3 knots; mean tidal range at outer bar light-buoy "9" 9 ft. 6 in.; Brunsbuttel 8 ft. 8 in. and Hamburg 9 ft. 2 in. nature of bottom, sand and mud.

River pilotage dues (Lotsgebuhr) have to be paid by all vessels exceeding 300 g.r.t., irrespective of whether they have used a river Pilot or not. Pilotage fee (Lotsgeld) will only be charged if a Pilot is employed.

DEVELOPMENTS — RIVER ELBE: Continuous dredging is in process along the River Elbe with a view to providing a depth of 13.5 m. below mean low tide level.

As from completion of these works in 1978, the maximum permissible draft for vessels approaching the ports on the River Elbe will be increased from time to time in small increments.

HELICOPTERS: Helicopter Pilot service is available for vessels exceeding 10,000 g.r.t. at Deutsche Bucht light-vessel. A twin-turbine powered amphibious Bell 212 S helicopter is available for this service.

Suitably equipped vessels may have Pilot transferred by helicopter. Please refer to Admiralty list of radio signals, give ETA 24 hours prior to arrival at helicopter rendezvous position in the vicinity of Deutsche Bucht light-vessel to "Elbetosen Brunsbuttel (cable address Elblotse Brunsbuttel) via Norddeich Radio, call-sign DAN. Message must include name of vessel, gross tons, ETA Deutsche Bucht, date 2 figures, time of vessel's arrival 4 figures, draft, vessel destination. (For example: Terra 104468 ETA Deutsche Bucht 11 1530 40 ft. 7 in. Brunsbuttel-Elbe Terminal).

In cases of defect of helicopter, poor visibility, icing conditions, or inadequacy of construction of ships the Sea-Pilots have to be embarked or disembarked by the Pilot boat at the same position. A sea-going Pilot boat is operating from Helgoland for embarking and disembarking the Pilots, if the helicopter is not available, or if the ship's construction is inadequate for helicopter transfer.

RADAR: A continuous chain of radar stations has been established to cover the traffic flow along the estuary of the River Elbe from Elbe 1 light-vessel as far as well into the port of Hamburg. If visibility drops below 3,000 m. and/or if particular situations arise (bad weather, ice, etc.), the Elbe Pilot will be assisted by his fellow Pilots at the shore-based radar stations. Where vessels carry no or inadequate VHF equipment, a transceiver set with calibrated duplex frequencies can be hired for the trip and should be ordered together with the request for a Pilot.

Contact radar stations Neuwerk Radar Radio 1, VHF Channel 20; Neuwerk Radar Radio 2, VHF Channel 5; Cuxhaven Radar Radio, VHF Channel 21; Belum Radar Radio, VHF Channel 3; Brunsbuttel Radar Radio, VHF Channel 18; Freiburg Radar Radio 1, VHF Channel 22; Freiburg Radar Radio 2, VHF Channel 20; Steindeich Radar Radio, VHF Channel 5; Hetlingen Radar Radio, VHF Channel 21; Hamburg Radar Radio, VHF Channel 19, 20 and 18.

ANCHORAGE: A deep-water anchorage for deep-draft vessels, very large crude carriers (VLCC's), and ultra large crude carriers (ULCC's) lies South of the light-vessel "Deutsche Bucht", approx. position 54° 01′ N., 07° 30′ E.

In vicinity of Elbe 1 light-vessel (5 miles inside) for large and deep-draft vessels, North of red radarline, approx. position 54° 01′ N., 08° 15′ E., depth of water about 14-21 m. below chart zero.

Neuwerk Roads, approx. position 53° 58′ N., 08° 30′ E., depth of water about 8-16 m. below chart zero;

Medem Roads, approx. position 53° 51.5′ N., 08° 46.5′ E., depth of water about 6-12 m. below chart zero;

Neufeld Roads, approx. position 53° 51.7′ N., 09° 00′ E., depth of water about 9-10 m. below chart zero;

N.E. Roads, off Brunsbuttel permission only for one tide, approx. position 53° 53′ N., 09° 12′ E., depth of water about 13-14 m. below chart zero;

Freiburg Roads, approx. position 53° 50.6′ N., 09° 19.5′ E., depth of water up to about 13 m. below chart zero;

There are further anchorages for small vessels at Sudreede (S. anchorage) off Brunsbuttel, Krautsand – and Twielenfleth Roads. The bottom at these anchorages consists of sand and mud.

DEEP SEA PILOTAGE: Elbe Pilots hold foreign-going Master mariner's Certificates and an additional government licence for North Sea pilotage, they are on call to board vessels in all North Sea ports of the Continent and the United Kingdom and in ports, along the coastlines of the English Channel. Vessels will be boarded on request by Elbe Pilots for approaching the River Elbe or by Elbe Pilots with additional North Sea licence for pilotage in the North Sea and English Channel. Please observe these periods of notice:

North Sea ports (Continent) 24 hours prior to sailing;

North Sea ports (United Kingdom) English Channel 48 hours prior to sailing or prior to passing local Pilot stations.

Request for services to be directed to "Elbelotsen Brunsbuttel", Tel: 04852/87295, cable address "Elblotse Brunsbuttel".

BRAKE: 53.20 N. 08.29 E. (See Plan Book)

PORT LIMITS: The government-owned piers are the commercial area of the port. A vessel is considered to be an "arrived ship" when she is moored alongside such piers, and the customs formalities are complete. Laytime will commence according to referring charter parties.

Port Authorities distribute the free berthing places in following the "Benutzungsordnung fur den Hafen Brake" which says briefly that a vessel will get a rank position in actual arriving times:

(a) for ships coming from sea: arrival "Weser lightvessel" plus 5 hours.

(b) for ships coming from Bremerhaven North Roads and Blexen Roads: departure plus 2 hours.

(c) for ships coming from Bremen: departure plus 3 hours.

DOCUMENTS:

2 Lists Ship's Stores.
2 Crew Lists.
2 Passenger Lists.
Health Certificate (forms obtainable from Pilot).
Ship's Register.

DEEP SEA PILOTAGE: See "General" before first German port.

PILOTAGE: Carried out by Weser River Pilots. The river Pilots also act as docking Pilots. Also see "Bremen" and "Bremerhaven".

ANCHORAGE: No anchorage in vicinity of Harbour. Anchorage in "Blexen Roads". For further details see "Bremen".

RESTRICTIONS: Vessels proceeding to Brake with a draft in excess of 24 ft. will be restricted by the tide.

MAX. SIZE: Max. length 239 m. (784 ft.); no restriction on beam. Max. draft 37 ft. in fresh water.

PRATIQUE: Free pratique is given by health and immigration officer only. If a case of fever or disease is suspected on board radio the Agent with details before arrival.

RADIO: Cable Agent via Norddeich Radio (Call sign DAN) advising ETA and cash requirements.

RADAR/VHF: Stations from Weser lightvessel to Bremerhaven. Radar service between Bremerhaven and Bremen is planned. Radar stations have day and night service. If no fog every odd hour radar stations give on VHF or Pilot walkie-talkie report of visibility, defective buoys, anchoring ships, obstructions to navigation, and special occurrences. Direct contact between port and ship is possible on VHF.

TUGS: Available day and night in sufficient number. No extra charge for using tug's lines.

BERTHING:

New locks are being built at the inner harbour and are expected to be operating in 1980. Dimensions: Length 95 m. (311 ft.), width 16 m. (52 ft.) Max. size of vessel to be handled will be a fully loaded vessel of 3,000 d.w.t. with a max. draft of 6.0 m.

Inner Harbour with tidal lock: Length of dock 1,070 m. (3,500 ft.), width 110 m. (360 ft.), width of entrance 13.25 m. (43 ft. 5 in.); depth of water over sill at ordinary tides 19 ft. 6 in., depth of water over sill at highest Spring 21 ft. 6 in. (at lowest neap 17 ft. 6 in.). Length of canal 228 m. (750 ft.), width of canal 46 m. (150 ft.), length of quay in canal 228 m. (750 ft.).

Riverside Berth: Total length 1,852 m. (6,075 ft.), depth at pier 37 ft. at normal low water, tidal amplitude 11 ft. 6 in. Max. draft 35 ft. Max. length of ships not more than 239 m. (784 ft.).

This government-owned pier is divided into 2 areas. The Northern part is the crane-area with a length of 4,510 ft., the Southern part, 1,565 ft. long, is the grain-handling area.

Private Pier of the Fettraffinerie/Unimills has a length of 245 m. (804 ft.).

SPECIALISED CARGO HANDLING FACILITIES:

Inner Harbour: crane area

2 electric cranes to lift 1 to 5 tons.
2 bridge cranes, capacity 50 tons.
2 bridge cranes, capacity 20 tons.
1 bridge crane, capacity 15 tons. } Riverside Berth
2 whipping cranes, capacity 25 tons.
2 whipping cranes, capacity 15 tons.

Grain handling area (Riverside Berth)

4 pneumatic grain elevators (capacity from 120 to 600 t.p.h.) with a total discharge capacity of 1,600 t.p.h.

Fettraffinerie Pier

Tank installations with pumping arrangements of a capacity of 700 t.p.h. to vessel and 2,000 t.p.h. from vessel.

The government-owned pier is equipped for containers, but not for roll-on/roll-off traffic. The berth does not handle liquid chemicals.

STEVEDORES: ETA has to be reported to the Agent to arrange gangs. Stevedores are working 3 shifts around the clock on working days (Monday to Saturday); on Sundays and holidays 4 shifts are worked around the clock.

MEDICAL: Two hospitals and several doctors available at Brake. Advance notice to Agent required if medical assistance necessary.

TANKERS: Fettraffinerie Pier: Max. draft 33 ft. Discharging lines: molasses 6 in., fuel oil 8 in., diesel 10 in. and vegetable oil from 4 to 8 in.

DENSITY: Brake Port, Freshwater: salinity = 1002–1004.

FRESH WATER: Available both at Riverside Berth and Inner Harbour. Pumping capacity from 18 to 20 t.p.h.

FUEL: All grades available by bunker barges.

FIRE PRECAUTIONS: No smoking on deck. For tankers at Fettraffinerie Pier smoking only in saloon and/or messroom.

CONSULS: No Consuls; consulates at Bremen.

REPAIRS: All normal ship and engine repairs can be carried out during laytime on board.

DRY DOCKS: One dry dock at Luehring Werft, Brake, for ships with a length not in excess of 85 m. (279 ft.), nor broader than 16 m. (52 ft. 6 in.), and a max. draft of 13 ft. 1 in.

SURVEYORS: Classification Socieities not represented but several surveyors available at Brake Port.

GANGWAY/DECK WATCHMEN: Crew's watchmen necessary – strong tides, current-speed 3 knots.

HATCHES: Depends on the different charter parties.

CUSTOMS ALLOWANCES: 200 cigarettes, 1 bottle of spirits and 2 bottles of wine.

CARGO GEAR: Load/discharge normally effected by shore-gear.

REPATRIATION: Any necessary repatriation and/or crew changes can be effected by Agents at Brake.

AIRPORT: International airport served by regular airlines at Bremen. Brake to Bremen, distance 57 km. (35 stat. miles).

TIME: Local time is GMT plus 1 hour. No alterations to clocks during the year.

HOLIDAYS: New Year, Good Friday, Easter Sunday and Monday; May 1, Ascension Day; Whitsunday and Monday, Penitentiary Day, 2 Christmas Days. Cargo work can be arranged on those days, except on New Year, Easter Sunday (1st Easter day), 1st May, Whitsunday, 1st Christmas Day, and on the days before such days till 1200 and/or 1400 hours.

POLICE/AMBULANCE/FIRE: Police 110; Ambulance 4060; Fire 112.

TELEPHONES: No arrangements to place telephones on board.

SHORE LEAVE: Shore passes are required according to customs regulations.

IDENTIFICATION CARDS: Crew members to have valid identity cards.

DEVELOPMENTS: Weser fairway depth will be increased to 12 m. (39 ft. 6 in.).

SEAMAN'S HOSTEL: Weserstr. 1A, tel. 4490.

AUTHORITY: Niedersachsisches Hafenamt Brake.

BREMEN (Including Farge): 53.07 N. 08.45 E.

(See Plan Book)

DOCUMENTS:

3 Crew Lists.
3 Passenger Lists.
Provision and Store Lists incl. fuel oil.
Dangerous Cargo Lists.
Health Declaration.
Ship's Register.
No Customs Papers if vessel laying in Freeports at Bremen.

DEEP SEA PILOTAGES: See "Brixham" or "Cherbourg" and "General" before first German port.

PILOTAGE: Compulsory only for ships with dangerous goods in bulk according to a special list of the Wasser-und Schiffahrtsdirektion, tankers and nuclear ships. But a portion of pilotage dues is charged in any case. Most vessels take a Pilot.

Distance from Bremen lightvessel to Bremerhaven 36 miles. Distance from Bremerhaven to Bremen 32 miles.

At least 12 hours before arrival at Weser lightvessel, Masters should cable ETA messages to "Lotsenbruderschaft Weser zwei Bremerhaven" via Norddeich Radio. Message to include name and g.r.t. of vessel, place where Pilot required to board, day and hour of vessel's arrival, vessel's destination and fresh-water draft in metres. Sea Pilots board at Weser lightvessel to Bremerhaven. River Pilots board at Bremerhaven to pilot vessels as far as Bremen.

Pilot station near Weser lightvessel 53° 52′ 16″ N., 07° 50′ 00″ E., black-painted motor vessel, black-topped funnel, white lettering "Lotse" on hull. In rough weather, pilot boat may be found inside near Rotesand lighthouse/buoy "G". Pilots may be contacted by Norddeich Radio, 2182 or 2614 kHz. Alternatively by VHF Channel 16.

River Pilots boarding at Bremerhaven also act as harbour Pilots to all ports above Bremerhaven.

ANCHORAGE:

1. About 1 mile South-West of Weser lightvessel 53° 52′ 16″ N., 07° 50′ 00″ E.
2. Near Hoheweg lighthouse between buoys "F" and "N". Depth about 12 m.
3. Tegeler Plate between buoys 10 and 12.
4. Bremerhaven Northroads between buoys "Y" and "A". For ships with dangerous cargo inside the red sector of Imsum Lt. F. Depth about 12 m. Blexen Roads (South Roads) depth about 10 m.

RESTRICTIONS: Vessels proceeding to Bremen, with a draft in excess of 22 ft. will be restricted by the tide.

MAX. SIZE: Bremen: length 220 m., draft 32 ft. in fresh water. Longer ships with special permission.

Locks: At the entrance of the Industriehafen max. length 170.0 m., max. breadth 23 m., tidal docking up to 190 m., max. draft up to 30 ft. 03 in. according to tide.

HEALTH: Master has to fill and sign Maritime Declaration of Health which is handed to health officer on arrival at Bremerhaven and Bremen. In case suspected disease or fever on board radio details to Port Health Bremerhaven via Norddeich Radio before arrival.

RADIO: Cable Agent via Norddeich Radio, call sign DAN, advising ETA and cash requirements.

Bremen Port Radio VHF station on Channels 3, 16, and 14 to be used for messages to all Port Authorities including Police and Fire Brigade and Port Health in case of emergency.

RADAR/VHF: Stations from Weser lightvessel to Bremerhaven. Radar service between Bremerhaven and Bremen is planned. Radar station has day and night service. If no fog, every odd hour radar station gives by VHF, or Pilot walkie-talkie, report of visibility, defective buoys, anchoring ships, obstructions to navigation and special occurrences. The new radar station at Bremen Port area is working day and night, call Bremen Radar Radio on Channel 12 or 16.

TUGS: Tugs available at all stations according to ships request. Tugs lines used (only) without charge.

BERTHING: Berthing at Bremen: The following harbours can be reached:

Harbour name:	*Max. draft subject to tide and berth* ft.	in.	*Safe draft in Harbours at any time up to* ft. in. – ft. in.	*Length* m.
Europahafen	31		23 06 – 29 00	2,760
Uberseehafen	32		27 06 – 32 00	3,240
Holz–und Fabrikenhafen	31		21 06 – 28 06	1,540
Getreidehafen	32		13 06 – 32 00	780
Neustadter Hafen	32		31 00 – 32 00	2,000
Kap Horn Hafen	32		30 03	800
Industriehafen	30	03	12 00 – 30 03	5,100

Max. draft is dependent on the prevailing winds

SPECIAL CARGO-HANDLING FACILITIES:

Container-Handling Facilities: The container terminal in the Neustadter Hafen is equipped with 2 container cranes, suitable for 40 ft. containers. Maximum lifting capacity: 45 tons. The terminal has 116 connections for reefer containers.

Roll-on/roll-off terminal: At the head of the Europahafen, 1 berth. Maximum carrying capacity 60 tons, width 8 m. Max. draft 28 ft. Two new terminals are planned at the Neustadter Hafen.

Lash Terminal: A lash terminal has been built at the head of the Uberseehafen. Further lash places: Lankenauer Hoft and Europahafen.

Bulk handling facilities (Industriehafen)
Bulk cargoes such as coal, coke, ore, phosphate, oil, logs, and potash are handled in the Industriehafen. To enter the Industriehafen, vessels have to pass through a lock which is 171 m. long, 23 m. wide and allows a max. draft of 30 ft. 03 in. fresh water at normal high water.

Gebr. Rochling (Kohlenhafen)
At this facility coal, ore, phosphate, and logs are handled. There are no restrictions regarding the vessel's length, beam, height or draft other than those imposed by the lock to the Industriehafen. The quay has a length of 850 m. and is equipped with four 18-ton cranes, each having a capacity of 1,500/2,000 tons per shift. In addition there is 1 gantry crane lifting a 20-ton wagon and loading this quantity within 3 minutes, and 4 cranes (two of 8 tons and two of 5 tons) which are mainly used for handling logs.

Storage facilities amount to 75,000 sq.ft.

Anker-Schiffahrt (Kalihafen)
At this facitilty salt and potash cargoes are handled. The quay has a length of 400 m. and is equipped with 5 conveyerbelt loaders and 3 crane bridges each with a lifting capacity of 6 tons. It is possible to store about 150,000 tons of cargo. Restrictions as above.

Klocknerhutte (Huttenhafen)
This facility mainly handles coal, ore, scrab, stones and sand. Export of steel sheets pipes and coils of Klockner iron mill are handled via this quay.

Quay length:	550 m.
3 Gantry cranes:	12.5 tons, 10 tons, 40 tons.
Ore discharging capacity	8,000 tons per 24 hours.
Storage capacity	300,000 tons

Restrictions as above

Kraftwerk-Hafen (Power Station) Kohlenhafen
At this berth only coal cargoes for use by the power station are handled. Discharging rate 2 cranes: 1,250 tons per shift.

Other bulk handling facilities:
Granary (Getreidehafen) *near the Uberseehafen*
No locks Max. draft 32 ft. Lighterage is possible.
Berth A 2 elevators with a capacity of 400 t.p.h. max. length 260 m. (853 ft.).
Berth B 6 elevators with a capacity of 170 t.p.h. max. length 176 m. (577 ft.).

Kraftwerk Farge (Power Station)
Location: 10 miles downstream from Bremen. Only coal cargoes for the power station are handled.

Max. draft	29 ft. 6 in.
Max. length	200 m. = 656 ft.
Max. beam	25 m. = 82 ft.

3 cranes, total discharging capacity 200 t.p.h.

Rolandmuhle: tidal basin Holz-und Fabrikenhafen. Grain facility with

Max. draft	21 ft. at low water.
Max. length	180 m. (591 ft.).
2 stationary elevators	3,000 tons per day

1 conveyer for loading bags only

J.H. Bachmann/J. Muller/Karl Gross (Holz-und Fabrikenhafen)
Facility for grain and occasionally, general cargo handling.

Max. draft	up to 23 ft. at normal low water.
Quay length	710 m. (2,330 ft.).
Cranes	13 Grain/General cargo
Elevators	4–250 t.p.h. each

Car and general cargo loading installations (Kap Horn) with two quays, one 320 m. long inside Industriehafen and the other 800 m. long (at the riverside). The storage area is 100,000 sq.m. and provides sufficient space for 7,000 cars. The loading of cars is done by ship's gear.

STEVEDORES: Ordered by Agent; no ETA advice to stevedores necessary.

Working hours:

Regular period: 0630–1430 resp.	on Sundays: (overtime)
0600–1400	1st shift: 0600–1200
Free Port	2nd shift: 1200–1800
1st shift: 0600–1400	3rd shift: 1800–2400
2nd shift: 1430–2230	4th shift: 2400–0600
3rd shift: 2300–0600 (overtime)	
Industrieh/Grain Pier	Industrieh/Grain Pier
0630–1430	0630–1230
1430–2230 (overtime grain pier)	1230–1830
2230–0630 (overtime)	1830–2430
	0030–0630

On Saturdays:
Free Port
1st shift: 0600–1400
2nd shift: 1430–2030 (overtime)
3rd shift: 2100–0300 (overtime)
Industriehafen/Grain Pier
0630–1430
1430–2030 (overtime)
2030–0230 (overtime)

CRANES: All piers are fitted with cranes 3/7 tons. Floating cranes up to 250 tons available.

MEDICAL: All medical facilities available. Advance notice to Agent required if medical assistance necessary.

TANKERS: Draft in fresh water.

Holzhafen	one berth max. draft 28 ft. 10 in. at low water
Osterott I	one berth max. draft 33 ft. at low water
Osterott IV	one berth max. draft 36 ft. 09 in. at low water
Farge	two berths max. draft 31 ft. 06 in. at low water

For the following tanker berths see restrictions of the entrance lock Industriehafen

Oelhafen:	several berths max. draft 14 ft. to 23 ft.
Huttenhafen:	three berths max. draft 20 ft. to 24 ft.
Becken A	one berth max. 22 ft.
Kalihafen	one berth max. 30 ft. 03 in.

Fina Oil Einswarden. Max. draft 36 ft. 6 in. Discharging lines crude oil 12 in., fuel oil 10 in., diesel 8 in.

Frisia (Gulf Oil) Einswarden. Berth for tankers up to 250 m. length, max. draft 36 ft. fresh water.

DENSITY: Fresh water.
FRESH WATER: Available by hose and barge.
FUEL: All Grades available.
FIRE PRECAUTIONS: Smoking or use of open fire not allowed all over the Port area. No smoking on deck. Tankers, smoking in saloon or messroom only.
CONSULS: 31 countries represented.
REPAIRS: All repairs possible.
DRY DOCKS:

Vulkan-Gravity Dock	up to 240,000 d.w.t.
and one floating Dock	up to 22,000 d.w.t.
AG. "Weser" 2 Docks	up to 22,000 d.w.t.

SURVEYORS: Contact Schiffsbesichtiger: 38-52-84.
GANGWAY/DECK WATCHMEN: Not considered necessary. But available when ordered.
HATCHES: Opening and closing normally by crew with stevedores assisting.
CUSTOMS ALLOWANCE: Outside freeports: 200 cigarettes for 3 days or 50 grams tobacco and 1 bottle spirits. After 3 days further same quantities. Wine not restricted. Freeports in Bremen only Europahafen, Uberseehafen and Neustadter Hafen.
CARGO GEAR: No additional requirements. Preventers necessary.
REPATRIATION: Any time.
AIRPORT: Regular national and international flights.
HOLIDAYS: New Year's Day (no work performed); Good Friday; Easter Sunday (no work performed); Easter Monday; Labour Day (no work performed); Ascension Day; Whit Sunday (no work performed); Whit Monday; 17th June; Prayer Day; Christmas Day (no work performed); Boxing Day.
POLICE/AMBULANCE/FIRE: Police help 110; Fire, First aid 112.
Pilot Station Bremerhaven: Sea Pilots 4-22-20; River Pilots 4-22-89.
Pilot Station Bremen: 38-52-08 or 38-13-26.
Port Administration Bremen: 397-1.
Waterway Police: 38-43-31.
Port Medical Services: 38-34-16.
Immigration: Call Water Police.
Foreign Calls: 0010.
TELEPHONES: It is possible to rent a telephone box from Mooring Company.
REGULATIONS: Usual Port Regulations. Special Regulations for dangerous goods and Tankers.
AUTHORITY: Hafenamt Bremen.
AGENT: Wm. H. Muller Co. (Bremen) GmbH. Birkenstrasse 37. Bremen 1.Tel.: (0421) 314910. Telex: 244704. Cables: "Batavier".

BREMERHAVEN: 53.33 N. 08.35 E. (See Plan Book)

DOCUMENTS:
6 Crew Lists.
6 Passenger Lists.
3 Provision and Store List incl. fuel oil.
3 Dangerous Cargo List.
Health Certificate (forms obtainable from Pilots).
Ship's Register.
No Customs Papers if vessel laying in Freeport at Bremerhaven.

DEEP SEA PILOTAGE: See Brixham or Cherbourg and "General" before first German Port.
PILOTAGE: See "Bremen".
Docking Pilots join vessels at Buoy "Z" if bound for Uberseehafen or near entrance of Geeste River if bound for Fischereihafen. Call sign is International Code flags PT with pennant below. Sound and flash signals are 3 long and 5 short.
ANCHORAGE: See "Bremen".
RESTRICTIONS: Vessels proceeding to Bremerhaven with draft in excess of 35 ft. will be restricted by tide.
MAX. SIZE: Length 340 m., draft 41 ft. in fresh water. Draft 42 ft. 8 in. in fresh water, special permission required.
HEALTH: See "Bremen".
RADIO: See "Bremen".
RADAR/VHF: See "Bremen".
TUGS: Tugs join vessel with docking Pilots. Tug's lines used at no extra charge.

BERTHING: There are two harbour-groups, Uberseehafen North of Geeste River and Fischereihafen South of it.

Uberseehafen:

Along Weser River:	*Depth at LW*
Columbus Quay	36 ft.
Stromkaje	46 ft.

Dock basins:	*Depth*
Neuer Hafen	21 ft.
Kaiserhafen I	28 ft.
Kaiserhafen II	36 ft.
Kaiserhafen III	36 ft.
Verbindungshafen	36 ft.
Nordhafen	46 ft.
Osthafen	46 ft.

The dock basins can be reached through 2 locks:

Kaiserschleuse: length 732 ft., gate width 88 ft. depth 23 ft. at LW.

Nordschleuse: length 1220 ft., gate width 147 ft. depth 36 ft. at LW. Max. size of vessel. length 265 m., beam 38 m. (124 ft. 07in.). Draft 42 ft. 08 in.

Fischereihafen:

Dock basins:	*Depth*
Fischereihafen I	24 ft.
Fischereihafen II	24 ft.
Handelshafen	22 ft.

Locks:

Fischereihafen-Doppelschleuse

Small lock: length 349 ft., gate width 39 ft. depth 21 ft. at LW.

Large lock: length 328 ft., gate width 98 ft. depth 21 ft. at LW.

SPECIAL CARGO HANDLING FACILITIES: All sheds are equipped with electric cranes.

With special permission of the port authorities the following maximum FW drafts are allowed.

42 ft. 8 in. = 13 m. – max. beam 40 m.
39 ft. 3 in. = 12 m. – max. beam 41 m.
35 ft. = 10.7 m. – max. beam 42 m.

The port is equipped with modern bulk, container, roll-on/roll-off and general cargo facilities.

3 floating cranes have lifting capacities of 100, 250 and 500 tons respectively.

Weserport (Osthafen) Ore transhipment installation, quay length 330 m.. Depth 14.6 m. 2 unloaders. Max. outreach 22.5 m. Total discharge capacity 2,000 t.p.h. Average rate 750 t.p.h.

Columbus Quay Passenger and general cargo facilities.

Quay length 1,020 m. Depth 30 – 36 ft.

9 cranes – 4 to 8 tons.

Terminal ferry service to Harwich.

Car loading installations

The car loading installation at Bremerhaven is situated in the Nordhafen. Quay length 750 m. Storage area 40,000 sq. m. for about 3,500 cars. The loading is done by ships' gear.

Container Terminals

2 container terminals, 1 at Stromkaje and 1 in the Nordhafen, are equipped with 10 container cranes. 7 cranes at 54 tons, 2 cranes at 45 tons and 1 crane at 52 tons.

Depth alongside in river 46 ft. at LW. Depth at Nordhafen 38 ft.

Kaiserhafen/Verbindungshafen offers 4 basins for general cargo handling. Quay length: 4.130 m. Storage capacity in modern sheds: 79,716 sq. m. 40 cranes with capacities from 3–8 tons. Various cranes for heavy lifts up to 30 tons. Shed B in the Kaiserhafen III is equipped with 2 conveyor belt loaders for bagged cargo, especially fertilizers. The installation is weather protected. A banana discharging installation, with 5 elevators, has a capacity of over 300,000 tons per year.

Lash Carriers: Special facilities are available.

MEDICAL: Hospital facilities at all Weserports. No vaccination normally required.

STEVEDORES: Ordered by Agent; no ETA advice to stevedores necessary.

Working hours:
1st shift: 0600–1400
2nd shift: 1400–2200
3rd shift: 2200–0500 (overtime)
on Saturdays:
1st shift: 0600–1400
2nd shift: 1400–2000 (overtime)
3rd shift: 2000–0200 (overtime)
on Sundays:
as Bremen Freeport.

TANKERS: *Esso Bremerhaven*, Columbus-Kaje. Max. draft 36 ft.

There are several tank-cleaning boats available to receive slops at Bremerhaven.

DENSITY: 1008 – 1010.

FRESH WATER: Available by pipe-line at all berths.

FUEL: All grades available.

FIRE PRECAUTIONS: No smoking on deck. Tankers smoking only saloon or messroom.

GANGWAY/DECK WATCHMEN: Not considered necessary.

OPENING/CLOSING HATCHES: Normally by crew with stevedores assistance.

CUSTOMS ALLOWANCE: Outside freeports: 200 cigarettes for 3 days or 50 grams tobacco and 1 bottle spirits. After 3 days, further same quantities. Wine not restricted. Freeports only at Bremen (Europa, and Uberseehafen), and at Bremerhaven (Kaiserhafen, Columbus Kaje and Weserport).

CARGO GEAR: No additional requirements. Preventers necessary.

IDENTIFICATION CARDS: Not required.

CONSULATES: At Bremen only.

REPAIRS: All repairs possible.

DRY DOCKS: There are 2 graving docks and 10 floating docks with max. capacity 75,000 tons.

REPATRIATION: Any time.

AIRPORT: About 4 miles from Bremen. Regular airlines.

HOLIDAYS: New Year's Day (no work performed); Good Friday, Easter Sunday (no work performed), Easter Monday; Labour Day (no work performed); Ascension Day; Whit Sunday (no work performed); Whit Monday; 17th June; Prayer Day; Christmas Day (no work performed); Boxing Day.

TELEPHONE: Accidents, Police 110; Fire 112; Harbour Master 481212; Docking Pilots 481 230; Sea Pilots 42220; River Pilots 42289; Waterway Police 47011; Port medical service 40031.

DEVELOPMENTS: 2 container cranes under construction, expected to be operational mid-1977.

AUTHORITY: Hansestadt Bremisches Amt-Der Hafen kapitan.

AGENT: Wm. H. Muller Co. (Bremen) GmbH, Neue Fahrgastanlage 11, Kaiserhafen, D-2850 Bremerhaven. Telegrams: "Batavier-Bremen". Telex: 238590. Telephone: (0471) 46123.

BRUNSBUTTEL (Including Ostermoor): 53.43 N. 09.09 E. (See Plan Book)

DOCUMENTS:

Health Certificate forms obtainable from river Pilot.
3 Crew lists.
3 Personal Effects Lists.
3 Stores Lists.
Bill of Lading.
Ship's Register.

For ships entering locks of Brunsbuttel for transit traffic through Kiel Canal, only ship's register required.

DEEP SEA PILOTAGE: See "General" before first German port.

PILOTAGE: *Anchorage River Elbe:* See "General" before first German port.

Pilotage Kiel Canal: Pilotage generally compulsory, vessels over 2,500 g.r.t. must employ a wheelman.

Pilot station, tel. 04852/8811, VHF Channel 9, ETA 6 hours prior arrival Brunsbuttel Roads by cable to "Kanallotse Brunsbuttel" via Norddeich Radio (DAN), requiring Canal or Harbour Pilot at Brunsbuttel, (for example: Brigitte 1249 ETA Brunsbuttel 29 1800 3.5 m.). Pilot will board ships off the entrance to Kiel Canal.

Pilot boats are painted black with "LOTSE" in white letters on hull. Signal for Pilots is flag "G" over numeral pennant 1, sound or morse signal, VHF Channel 9.

ANCHORAGE: Vessels waiting for entrance to the Canal may anchor in N.E. anchorage, South anchorage, or Neufeld anchorage, all with sufficient depth for vessels transiting Canal.

RESTRICTIONS: No restrictions imposed on night entry. If draft above 31 ft. 2 in. fresh water, vessels will be piloted to Brunsbuttel with flood-tide.

Dimensions of lock: length 310 m., beam 40 m.

The Canal can be navigated by vessels up to 235 m. LOA and 32.5 m. beam and draft in accordance with table below.

Length in (m.)	*Beam in metres* 20	21	22	23	24	25	26	27	28	29	30	31	32	32.50
	Draft on (m.)													
160	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.4	9.3	9.2	9.1	8.9	8.9
163	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.4	9.3	9.2	9.1	9.0	8.9	8.9
166	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.4	9.3	9.1	9.0	8.9	8.8	8.7
169	9.5	9.5	9.5	9.5	9.5	9.5	9.4	9.3	9.2	9.0	8.9	8.8	8.7	8.6
172	9.5	9.5	9.5	9.5	9.5	9.4	9.3	9.2	9.1	9.0	8.8	8.7	8.6	8.5
175	9.5	9.5	9.5	9.5	9.5	9.4	9.3	9.1	9.0	8.9	8.8	8.6	8.5	8.4
178	9.5	9.5	9.5	9.5	9.4	9.3	9.2	9.0	8.9	8.8	8.7	8.5	8.4	8.3
181	9.5	9.5	9.5	9.4	9.3	9.2	9.1	9.0	8.8	8.7	8.6	8.5	8.3	8.3
184	9.5	9.5	9.5	9.3	9.2	9.1	9.0	8.9	8.7	8.6	8.5	8.4	8.3	8.2
187	9.5	9.5	9.4	9.3	9.1	9.0	8.9	8.8	8.6	8.5	8.4	8.3	8.2	8.1
190	9.5	9.4	9.3	9.2	9.1	8.9	8.8	8.7	8.6	8.1	8.3	8.2	8.1	8.0
193	9.5	9.3	9.2	9.1	9.0	8.9	8.7	8.6	8.5	8.4	8.3	8.1	8.0	7.9
196	9.4	9.3	9.1	9.0	8.9	8.8	8.6	8.5	8.4	8.3	8.2	8.0	7.9	7.8
199	9.3	9.1	9.0	8.9	8.8	8.7	8.5	8.4	8.3	8.2	8.1	7.9	7.8	7.8
202	9.2	9.1	9.0	8.9	8.7	8.6	8.5	8.4	8.2	8.1	8.0	7.9	7.7	7.7
205	9.1	9.0	8.9	8.8	8.6	8.5	8.4	8.3	8.2	8.0	7.9	7.8	7.7	7.6
208	9.0	8.9	8.8	8.7	8.5	8.4	8.3	8.2	8.1	8.0	7.8	7.7	7.6	7.5
210	9.0	8.9	8.7	8.6	8.5	8.4	8.3	8.2	8.1	8.0	7.8	7.7	7.6	7.5
214	8.9	8.8	8.6	8.5	8.4	8.3	8.2	8.0	7.9	7.8	7.6	7.5	7.4	7.4
217	8.8	8.7	8.5	8.4	8.3	8.2	8.0	7.9	7.8	7.7	7.5	7.4	7.4	7.3
220	8.7	8.6	8.4	8.3	8.2	8.1	8.0	7.8	7.7	7.6	7.5	7.4	7.3	7.3
223	8.6	8.5	8.4	8.3	8.1	8.0	7.9	7.7	7.6	7.5	7.4	7.3	7.2	7.2
226	8.5	8.4	8.3	8.2	8.0	7.9	7.8	7.7	7.5	7.4	7.4	7.3	7.2	7.1
229	8.4	8.3	8.2	8.1	7.9	7.8	7.7	7.6	7.4	7.4	7.3	7.2	7.1	7.1
232	8.4	8.3	8.1	8.0	7.9	7.7	7.6	7.5	7.4	7.3	7.2	7.2	7.1	7.0
235	8.3	8.1	8.0	7.9	7.8	7.6	7.5	7.4	7.3	7.3	7.2	7.1	7.0	7.0

Height above water-line transitting Canal must not exceed 40 m.

For Binnenhafen, as far as km. 6.00, vessels not requiring to transit Canal may enter with draft up to 10.40 m.

Elbe Terminal: Elbe Terminal situated outside of locks, quay length 1,100 m.

No restrictions imposed on night entry. Vessels may berth and unberth day or night.

MAX. SIZE:
Oil Harbour: Max. draft 34 ft. 2 in. fresh-water max. length 235 m.
Ships passing canal: See "Restrictions" above.

Elbe Terminal:
Pilotage Elbe Terminal: Elbe Pilots also act as docking pilots.
Inward bound: Vessels allowed draft to max. 42 ft. 06 in. in saltwater, on arrival Elbe 1 lightvessel, may enter only on rising tide under normal weather and tide conditions.

Tankers exceeding 15,000 g.r.t. and max. draft 35 ft. in saltwater, on arrival Elbe No. 1 lightvessel, may berth at any time against the ebb-tide.

Tankers and vessels up to 15,000 g.r.t. and 35 ft. draft in saltwater, on arrival Elbe No. 1 lightvessel, allowed to berth at any time.

Outward bound: Vessels exceeding 35 ft. draft in freshwater, on departure from Elbe Terminal, may leave 2 hours after low water.

Vessels up to 35 ft. draft in freshwater, on departure from Elbe Terminal, may unberth at any time.

Inward bound: Vessels exceeding 300 m. length or 45 m. breadth allowed draft to max. 41 ft. in saltwater, on arrival Elbe 1 lightvessel, may enter only on rising tide.

No restrictions as to length, beam, or height of vessel.

Outward bound: Vessels allowed draft to max. 35 ft. in freshwater, on departure from Elbe Terminal, may leave 2 hours after low water.

Keel clearance of 10% of draft required.

Ostermoor:

Max. draft	*Max. gross tonnage*	*Max. beam*
10.40 m. (34 ft. 02 in.)	20,000 g.r.t.	27.00 m. (88 ft. 07 in.)
9.50 m. (31 ft. 02 in.)	25,000 g.r.t.	29.00 m. (95 ft. 02 in.)
8.00 m. (26 ft. 03 in.)	35,000 g.r.t.	32.50 m. (106 ft. 08 in.)

Max. allowed length (LOA) 235.00 m. (771 ft. 00 in.)

HEALTH: Pratique automatic for vessels entering harbour for loading or discharging, and ships passing through Canal if required. Health Certificate form does not show any infectious diseases.

RADIO: All messages to Agents and Pilots etc., through Norddeich Radio, call sign "DAN". Closer to port Elbe-Weser Radio can be contacted by VHF Channel 16.

Ships reporting station is on permanent duty at Brunsbuttel, VHF Channel 14, safety and calling Channel 16.

RADAR: Radar Service from Elbe 1 to Hamburg see "General" before first German port, but no special Port Radar Service for Brunsbuttel. Radar Service in the area of Brunsbuttel available, can be contacted through VHF Channel 18, "Brunsbuttel Radar Radio".

TUGS: 6 tugs available at Brunsbuttel. Vessel's lines used. Tugs normally join vessels bound for the Elbe Harbour on river in vicinity of Canal locks.

From the approach limit up to entry into the lock, tug assistance is mandatory for vessels in Group 6 and also such vessels which manoeuvre only with difficulty. Tugs assisting ships entering locks join vessels on canal-roads.

BERTHING: Ships lying at terminals situated on Canal bank in Inner Harbour should take into consideration that vessels must moor safely, as suction of passing ships may cause breaking of lines.

Binnenhafen: Comprises the area between lock entrance and km. 5.27.

Also see "Tankers" and "Fuel" below.

BRIDGES: Ships transitting canal must have bridge clearance of 40 m. Otherwise no impediments.

STEVEDORES: Ordered by Agents, no ETA to stevedores necessary.

MEDICAL: Port Medical Service by Harbour Doctors. Day and night service. Inoculations have to be ordered 24 hours prior arrival. Hospital available at Brunsbuttel.

TANKERS: *Elbe Terminal:* Crude oil discharge berth situated outside of locks. One 30-in. pipe-line to DEA Tanker Storage. Two 12 in. hoses and 2×16 in. hoses available for discharge. Pumping rate 10,000 cu.m/h.

Oil Harbour. Situated on North side of Canal with entrance in location of km. 3.5. 5 berths suitable for tankers up to 10.40 m. (fresh water) draft. Hoses of 6 in., 8 in. and 10 in. for handling crude oil, diesel oil, gas oil, gasoline, tuluol, xylol and lube oil. No slop facilities available.

Ostermoor:
Operator: Veba-Chemie A.G. (VC) Veba-Chemie (PO) Port Authority.

Immigration clearance: Will be carried out on board.
Customs clearance: No freeport. Customs clearance will be carried out on board.
Tug assistance: According to assignment of Port Authority.
Mooring: The use of constant tension winches is prohibited (berth 2 and 4 only). Port Authority will allocate berth where as the exact position alongside berth will be advised by VC. The Master is responsible for safe mooring. Additional mooring may be requested by Port Authority responsible VC. Stem of vessel at berth in direction Kiel Canal. Exception regulation by Port Authority.
Drinking water: Available at berth 1, 2 and 4 against payment (PO).
Steam and nitrogen: Not available from ashore.
Bunkers supply: By barges only. The Port safety regulation must be observed (Northern Basin).
Ship repairs: Permission of VC required.
Electricity supply: No connections available.
Garbage disposal: Available (PO).
Dirty ballast disposal: Not possible in the Port. Available only at Elbe – Port jetty and Kiel Canal (Inner harbour) by Elbe – Slop – Ex GmbH.
Navigating into the North Basin: (direction by VC) – only after stop of cargo operations at berth 4.
Gangways: At berth 2 and 4 gangways are at hand (VC). At berth 4 and at waiting place a lifeboat has to be ready at the accommodation ladder at the offside during cargo operations.
Stop of cargo operations in case of emergency: At the sound of the signal "stay away" (· —) and fire (— — —) by loudspeaker; at the instructions given by telephone or loudspeaker; when the flashing light is in operation; at the release of the disconnection couplings; in case of fire on board.

Loading and Discharging Installations	*Berth/Products*		
	Berth 1 *Urea bulk-bagged*	*Berth 2* *Heavy Fuel Oil*	*Berth 4* *Anhydrous Ammonia*
Loading/discharge rate with vapour return line (max.)	—	—	*800 t/h (at −33° C) 250 t/h (at ambient temp.)
Loading/discharge rate without vapour return line (max.)	——	800 t/h (‡)	*500 t/h (at −33° C) † (at ambient temp.)
Loading rate with ship loader	1200 – 1500 t/d, 3000 t/d (bagged) (bulk)	—	—
Loading arm flange (Number and size) (Loose flange with collar acc. DIN 2656, ND40)	—	1×200 mm.	1×200 mm. (Product) 1×100 mm. (Vapour)
Storage capacity	85,000 tons	3×20,000 cu. m., 1×10,000 cu. m. 1× 1,000 cu. m.	2×30,000 cu. m. (−33° C) 1× 3,000 m. (ambient temp.)
Working range of ship Height refers to normal water level upwards	−11.0 to +9.0 m.	+0.2 to +16.0 m.	0.0 to +21.0 m.
Loader/unloader Outreach refers from dolphin vanishing line towards ship's offside.	1.0 to 26.0 m.	1.0 to 11.0 m.	1.0 to 11.0 m.
Further equipment at berths: Service limits of installed own gangways (Height refers to normal water level/top edge deck)	—	+1.0 to +12.5 m.	+1.5 to +14.5 m.
Public telephone connection against payment/number	compulsory/87211	compulsory/87212	compulsory/87213
Public telephone of harbour: 8066, 8067, 8068, 8069 (PO)	during loading/discharging at berth 4		
Branch line of VC telephone system (free of charge)/telephone number of ship. Telephone No. Portmaster 2171.	—	compulsory/2180	compulsory/2181
Delivery of goods from ashore	by ship's gear	by ship's gear	with jetty-crane against payment

Remarks: *reduced discharge rate at higher cargo temperature; †only possible in exceptional cases (discharge); ‡at following conditions: P min=3 bar, T min=+55° C. Viscosity max.=35° E/+55° C.

Also see "Fuel".

Fire on board: The Port Supervisor of VC has to be informed immediately. Cargo operations have to be stopped immediately. Ship has to give usual Thyphon – Firesignal ("F").

Cargo stop in case of bad weather: Berth 1: rainfall, windspeed 22 m/sec.; berth 2 and 4: windspeed 26 m./sec.

ETA messages: 72 hours prior to arrival to VC via Agent with the following informations: (1) Ship's name and call sign; (2) Arrival time; (3) Cargo (product and quantity); (4) Tankers: number and diameter of cargo manifold connections; (5) Any damage to hull, tanks or overboard valves. Vessels are dispatched according to accepted ETA. In any case ETA has to be repeated 48 and 24 hours before arrival.

Ships with dangerous cargoes or tankers which are not gas-free have to be reported to the Port Authority 48 hours before arrival.

As of January 1, 1979, gas tankers for ammonia are obliged to carry on board an IMCO Certificate and a certificate from a recognised classification society confirming certain water police pre-requisites for navigating the Kiel Canal.

Oil tankers of more than 2,000 d.w.t. must be in possession of a valid Oil Liability Certificate.

Cargo handling at berth 2 and 4: Before starting cargo operations following measures are to be taken:

Confirmation of Checklist by vessel's command.
Tank-resp. cargo inspection by VC.
Referring to "Operation plan" by VC.
Connection of ground-wire.
Emergency towing wires (steel) must be provided at water level (berth 4 only).
Installation of telephones.
Gas detectors handed on board (berth 4 only).
Fire hoses must be laid out and connected to fireline, which has to be under pressure during all cargo operations (berth 4 only).

Connection and disconnection of loading arms will be done by VC personnel.

Watchmen: During cargo operations a watchman has to be on stand-by at manifold. In case of an emergency, vessel's pumps must be able to be shut down immediately.

Minimum cargo crew during cargo transfer operation at berth 4:

1 Deck Officer } fully qualified in cargo
1 Ass. Eng. Officer } transfer operations
2 deckhands
1 watch officer for duties other than cargo transfer.

DENSITY: Brackish at Elbe Harbour and inside locks. Average density 3% NaCL.

FRESH WATER: Most berths supply by shore installations.

FUEL: All grades available. Vessels in Elbe Harbour supplied by barge.

Bunker stations on South side of Canal are:

Shell – 2 berths, no gas oil.
BP – 3 berths.
Elf (See Ostermoor) 4 berths.
Elbe-Slop-Ex – 2 berths.

and on the North side of Canal:

Norddeutsche Bunkergesellschaft – 1 berth no gas oil.
Brunsbuttel Bunker Service. – 3 berths.

FIRE PRECAUTIONS: No specific precautions except in Oil Harbour where anchors may not be used. Fire safety-lines must be ready fore and aft.

GANGWAY/DECK WATCHMEN: Services of watchmen not necessary but available day and night if required.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CERTIFICATES: Ships entering canal and using terminals mentioned under "Max. Size" must have international ship's register. All other certificates should be valid but are normally not used.

CUSTOMS ALLOWANCES: Tobacco, each Crew member 200 cigarettes or 50 cigars or 250 grams of tobacco. Surplus will be sealed up by customs. Wine and/or spirits 1 bottle of spirits and 1 bottle of wine permitted for each Crew member. Beer unlimited. Ships transitting canal are not affected.

IDENTIFICATION CARDS: Normally not needed. If necessary in special cases identification Cards will be issued by Immigration.

CONSULS: All consulates available at Hamburg. Swedish Vice-Consul at Brunsbuttel.

REPAIRS: Only minor repairs can be effected. Big yards and dry docks available at Hamburg.

REPATRIATION: Crew changes can be arranged in connection with local immigration Office.

AIRPORT: Nearest Airport Hamburg. 90 km. away.

TIME: GMT plus 1 hour. Permanent.

HOLIDAYS: Cargo work can be arranged on every day.

POLICE/AMBULANCE/FIRE: Police 110 and 3041; Waterway Guard Police 1012 and 8444; Passport Control 87.262; Customs 8555; Hospital 601; Fire 112.

TELEPHONES: No facilities for placing telephone on board.

AUTHORITY: Canal Authority – Wasser-und Schiffakrtsamt Kiel-Holtenau, Aubenstelle Kanalamt, Hafenkapitan Brunsbuttel.

BUTZFLETH: 53.39 N. 09.32 E.

DOCUMENTS:

3 Crew Lists.
3 Bonded Stores Lists.
3 Crew Manifests.
Maritime Health Declaration.
Ship's Register.
Discharge Books.
Passports of Crew.

Butzfleth is not a free-port. Customs, Immigration and River Police board on arrival at berth.

DEEP SEA PILOTAGE: See "General" before first German Port.

PILOTAGE – ANCHORAGE RIVER ELBE: See "General" before first German Port.

Pilotage River Terminal: Elbe Pilots also act as docking Pilots.

ANCHORAGE: Freiburg Anchorage, approx. position Lat. 53° 50.6′ N., Long. 09° 19.5′ E., depth of water up to 13 m. below chart zero; there are further anchorages for small vessels at Krautsand – and Twielenfleth Roads. (see "General" before first German Port.)

RADAR: River Radar Service from Elbe 1 to Hamburg, see "General" before first German port, but no special Port Radar Service for Butzfleth. Radar Service in the area of Butzfleth available, can be contacted through VHF Channel 21, "Hetlingen Radar Radio" and/or VHF Channel 5, "Steindeich Radar Radio".

RADIO: All messages to Agents and Pilots, etc., through Norddeich Radio, call sign DAN. Closer to port Elbe-Weser Radio can be contacted by VHF Channel 16.

Ships reporting station is on permanent duty at Stadersand, VHF Channel 11, safety and calling Channel 16.

TUGS: 4 tugs compulsory for mooring and unmooring. To be ordered from Hamburg and Brunsbuttel through Agent.

BERTHING: *Aluminium Oxid Stade GmbH. (AOS):* This bauxite/oxide plant, situated on the Westbank of the River Elbe, can be reached by vessels with max. drafts of 43 ft. F.W.

Quay length		*Depth at normal Low water*
Quay outside in total	325 m.	15 m. (49 ft.)
Within reach of crane............	205 m.	
Quay inside	200 m.	7 m. (23 ft.)

When the depth of the River Elbe has been increased, (end 1978), it is expected that larger vessels will be handled at this installation. (Max. draft approx. 46–47 ft.).

The oxide produced at this plant, apart from being exported, is used for the mills of V.A.W. Elbewerk GmbH., Stade-Butzfleth and of Hamburger Aluminium Werk GmbH., Hamburg Finkenwerder.

Average discharging/loading rate	
West African bauxite..	500 m. t.p.h.
Australian bauxite:	
from Gove..	550–600 m. t.p.h.
from Weipa..	750 m. t.p.h.
Oxide ("Spout" loading)..	500 m. t.p.h.

Ship's telephone connection (4146-1453) at AOS pier.

Dow Chemicals GmbH: This industry, situated close to the AOS plant, offers 2 berths for gas and chemical tankers.

	Products	
Restrictions	*Inflammable*	*Non inflammable*
Length at quay outside	149 m.	250 m.
Length at quay inside	125 m.	
Draft at quay outside	43 ft.	43 ft.
Draft at quay inside	26 ft. 3 in.	
Discharging rate liquid gas		approx 150 t.p.h.
Loading rate chemical products		200-650 t.p.h.

MEDICAL: Hospital and doctor available.

FRESH WATER: Available.

FUEL: Supplied by barge from Brunsbuttel or Hamburg.

REPAIRS: Minor repairs can be carried out.

AGENT: Sartori Berger, PO Box 1140, 2212 Brunsbuttel, tel. (code 4852) 8091 (5 lines), telex 28324.

CUXHAVEN: 53.52 N. 08.42 E. (See Plan Book)

DOCUMENTS:

Stores List.
Crew List.
Customs Manifest.
Derat. Certificate.

Amerikahafen is a Customs free port.

DEEP SEA PILOTAGE: See "General" before first German Port.

PILOTAGE – ANCHORAGE RIVER ELBE: See "General" before first German Port.

PILOTAGE: Pilot station situated in Old Harbour (Alten Hafen). To obtain Pilot call "Cuxhaven Post", VHF Channel 12. Pilot signal is flag "G" of International Code, or sound signal – 2 long and 2 short blasts.

ANCHORAGE: Available off Cuxhaven Medem Roads, approx. position Lat. 53° 51.5′ N., Long. 08° 46.5′ E., depth of water about 6 – 12 m. below chart zero; further anchorages see "General" before first German Port.

RESTRICTIONS: Vessels can enter by day or night. No tidal restrictions.

HEALTH: Quarantine clearance effected at Cuxhaven. Only vessels with suspected infectious disease on board are detained.

RADAR: River Radar Service from Elbe 1 to Hamburg see "General" before first German port, but no special Port Radar Service for Cuxhaven. Radar Service in the area of Cuxhaven available, can be contacted through VHF Channel 21, "Cuxhaven Radar Radio".

RADIO: For ETA, etc., use Norddeich Radio, call sign DAN. Closer to port Elbe-Weser Radio can be contacted by VHF Channel 16.

Ships reporting station is on permanent duty at Cuxhaven, VHF Channel 12, safety and calling Channel 16.

TUGS: Tugs available and used depending on ship size and weather conditions. Cost of tugs is Hamburg Tariff plus 20%.

MEDICAL: Doctors and hospitals obtainable day and night.

FRESH WATER: Available from shore pipe-line up to 50 t.p.h. Small quantities up to 15 tons may be obtained in Roads from bunker barge. There are no water barges.

FUEL: Bunker and gas oil available. Small quantities, up to 150 tons, may be obtained anytime. Otherwise according to conditions of supplying oil company.

FIRE PRECAUTIONS: No special restrictions. Ships with explosive cargo and liquid cargoes of danger class K1 and K2 not allowed in Cuxhaven Harbour.

CARGO HANDLING: A harbour for overseas ferries up to 150 m. length with roll-on/roll-off and container equipment.

GANGWAY/DECK WATCHMEN: Not obligatory, at Master's discretion.

OPENING/CLOSING HATCHES: Normally performed by crew. Stevedores must be paid if required to do this work.

CUSTOMS ALLOWANCES: 40 cigarettes, 1 bottle spirits and 2 bottles wine.

IDENTIFICATION CARDS: If no passport, shore pass required.

CONSULS:

Iceland, tel. 36036/37.
Sweden, tel. 36011/12.
Others at Hamburg/Bremen.

REPAIRS: All deck and engine repairs possible.

DRY DOCKS: Floating dock for vessels up to 110 m. length, and slipway for vessels up to 75 m. long and 13 m. beam.

REPATRIATION: All facilities available.

AIRPORT: Hamburg-Fuhlsbuttel, 130 km. away; Bremen, 110 km. away.

TIME: GMT plus 1 hour. Permanent.

HOLIDAYS: New Year's Day, Good Friday, Easter Sunday, Easter Monday, 1st May, Ascension Day, Whit Sunday, Whit Monday, 17th June, Atonement Day, Christmas Day, Boxing Day. Loading/unloading can be arranged on these holidays.

POLICE/FIRE/AMBULANCE: Police, tel. 110; Harbour Police, tel. 22072; Ambulance, tel 23125; Fire, tel. 112.

TELEPHONES: At Steubenhoft and in the ferry harbour, telephones can be put on board.

SERVICES: Compass adjusting and radio overhaul.

SHORE LEAVE: Allowed.

DEVELOPMENTS: A new Ferry Terminal with roll-on/roll-off and load-on/load-off facilities completed May 1978.

AUTHORITY: Niedersachsisches Hafenamt Cuxhaven.

AGENT: See "Hamburg".

ECKERNFORDE: 54.29 N. 09.51 E.

DOCUMENTS:

Stores List.
Customs Documents.
Cargo Documents.
Crew List.

PILOTAGE: No Pilot station. No tide. In East winds, water level can increase to 1.50 m. above normal.

ANCHORAGE: Good anchorage in the Roads between N.W. to N.W. by W. bearing from the port, distance 1 to 1.5 miles. Depths 18–21 m. Anchorage not allowed in harbour area.

CLEARANCE: Customs clearance at any time subject prior notice given. If suspected diseases on board inform Health Authorities.

MAX. SIZE. In outer harbour, up to 5 m. draft; in inner harbour up to 3 m. draft.

RADIO: Radio Kiel, call sign DAO, tel. 39011.

TUGS: No tugs.

BRIDGES: Outer and Inner Harbours separated by bascule bridge, opening to 12 m. width.

MEDICAL: Doctors and hospitals available.

FRESH WATER: Available.

FUEL: Diesel oil available. No coal.

WATCHMEN: Not available.

OPENING/CLOSING HATCHES: By ship's crew.

IDENTIFICATION CARDS: Required, if no passport.

REPAIRS: Available for fishing boats or coasters. Slipway for vessels up to 200 tons.

TIME: GMT plus 1 hour. Permanent.

HOLIDAYS: Work allowed on Sundays and official holidays subject to Harbour Master's permission.

POLICE/FIRE/AMBULANCE: Police, tel. 110; Hospital, tel. 9011; Fire, tel. 112.

TELEPHONES: Public telephones in harbour area. No installation on board.

SERVICES: Other services available from Kiel.

SHORE LEAVE: Permitted.

AUTHORITY: Stadtwerke Erkernforde GmbH.

ELSFLETH: 53.14 N. 08.28 E.

PORT LIMITS: The seaward boundary of the port is the entrance of River Hunte, vessels are considered to be arrived when alongside the berth or waiting berth, and customs formalities are completed.

DOCUMENTS:

2 Crew Lists.
2 Passenger Lists.
1 Health Certificate.
2 Provision and Store Lists.
1 Ship's Certificate.

DEEP SEA PILOTAGE: See "General" before first German port.

PILOTAGE: Pilotage is carried out by Weser River Pilots, no harbour Pilot available.

ANCHORAGE: No anchorage in vicinity of the harbour, see Blexen Roads.

RESTRICTIONS: Max. draft in the entrance at low water is 3.20 m.

MAX. SIZE: Max. size in daytime, length 80 m. Max. size at night-time, length 60 m., draft depends on the tide.

PRATIQUE: Pratique is given on arrival by the health officer. If disease or fever is suspected on board it has to be reported to the Agent.

RADIO: Cable Norddeich (call sign DAN) advising ETA and cash requirements.

RADAR/VHF: No port radar service but river radar can be used for approaching port from Weser lightvessel to Bremerhaven. VHF Channel 6 from Bremerhaven to Elsfleth.

TUGS: Tugs have to be ordered from Bremen or Brake, they join the vessel at River Hunte estuary. If tug lines are used there are no extra charges.

BERTHING: 1 quay with a length of 260 m., depth alongside 150 m.=5 m., and 110 m.=4 m., 1 waiting berth for small vessel 2 m., 1 private berth (Omni-Pac).

SPECIALISED CARGO-HANDLING FACILITIES: 2 cranes with 5 tons and 1 crane with 3 tons. Bulk cargo can be handled with grabs, no other special facilities.

BRIDGES: No bridges to reach the port, but all ships bound for Oldenburg are waiting at Elsfleth for opening bridges.

STEVEDORES: ETA has to be cabled to the Agents to arrange gangs. Port works 3 shifts around the clock, including Sunday and holidays.

MEDICAL: Medical service is available day and night. Hospital is available at Brake.

TANKERS: No tanker berth.

DENSITY: Fresh water.

FRESH WATER: Delivered from the quay by hose.

FUEL: Fuel is delivered by bunker-barges stationed in port.

FIRE PRECAUTIONS: No fire precautions.

CONSUL: No Consuls.

REPAIRS: 1 dockyard, all ship and engine repairs can be carried out.

DRY DOCKS: 2 slipways can be used.

SURVEYORS: Classification Societies have to be ordered from Bremen, surveyors available at Elsfleth.

GANGWAY/DECK WATCHMEN: A crews' watchman is necessary because of strong tidal streams, 2—3 knots.

HATCHES: Hatch-opening/closing to be carried out by crew.

CUSTOMS ALLOWANCES: Quantity permitted for each crew member: 100 cigarettes, 1 bottle of spirits.

CARGO GEAR: Loading/discharging is carried out by shore cranes.

REPATRIATION: Any time. Inform agent.

AIRPORT: Airport at Bremen (50 km). Regular airlines.

TIME: Local time: GMT plus 1 hour.

HOLIDAYS: Cargo work can be arranged on those days.

POLICE/AMBULANCE/FIRE: Police: Station 2263, River 2377. Ambulance: Brake Hospital 04401–4060. Fire 2333.

TELEPHONES: No ship-to-shore communications.

SHORE LEAVE: Crew members are allowed ashore with valid passports.

IDENTIFICATION CARDS: No shore pass issued.

REGULATIONS: No unusual regulations for the port.

DEVELOPMENTS: A new private berth is under construction for the distillery "Pabst & Richards".

GENERAL: All ships bound for Oldenburg have to do clearance in port.

AUTHORITY: Niedersachsisches Hafenamt Brake.

EMDEN: 53.23 N. 07.13 E. (See Plan Book)

DOCUMENTS: Health Certificate: form obtainable from River Pilot and to be completed before arrival Emden locks, where it is collected by Port Health Authorities. Crew Lists. Ship's Register. Slop-chest List.

DEEP SEA PILOTAGE: See "General" before first German Port.

PILOTAGE: Compulsory. At least 12 hours prior arrival at Pilot station, vessel to radio "Emslotse Emden" indicating vessel's name, ETA, destination and draft. Contact pilot vessel on VHF Channel 16 or MW 500 kHz or LW 2023 kHz (daytime) and 2182 kHz (night-time).

Pilot vessel located near Wester Ems Light Buoy in approx. position 53° 37′ N. 06° 24′ E.

ANCHORAGE: Vessels may anchor in vicinity of pilot vessel 9.5 fathoms depth. Sandy bottom.

RESTRICTIONS: Vessels drawing in excess of 26 ft. salt water have to wait for high tide to proceed to Emden proper. Tide rise about 10 ft.
MAX. SIZE: Under normal tide conditions, vessels drawing 38 ft. can enter Emden directly. Vessels up to 47 ft. can be discharged at the berth "Fischerbalje" on the South of Isle of Borkum. Vessel drawing up to 45 ft. salt water can be lightened in river inside Isle of Borkum at the unloading berth "Moewensteert" by floating cranes until appropriate draft achieved. Capacity of floating crane 1,000 t.p.h., 2 cranes available.

Length and beam restrictions imposed by locks at Emden: max. 255 m. length and 35.50 m. width. Vessels exceeding these dimensions require prior permission.
HEALTH: Pratique granted immediately on arrival at locks by Doctor or Health official.
RADIO: Cables should be despatched via Norddeich Radio (DAN).
RADAR: Radar service on the river "Ems" from approx. position 53° 37.5′ N. 06° 23′ E. (Westerems) or 53° 35′ N. 06° 23′ E. (Hubertgat) up to port entrance. The other range (Borkumradar) works on VHF Channel 18. Further information on this Channel.
TUGS: Sufficient tugs available, stationed at Emden locks, ranging from 790 to 3,900 h.p.
BERTHING: *Outer Harbour* quay length 1,539 m. – tidal harbour.

New Inner Harbour accessible through sea lock and Nesserlander Sea lock only for vessels up to 111 m. in length and 14.50 m. width.

New Inner Harbour South quay 932 m. in length. New Inner Harbour North quay 485 m. length, depth about 46 ft. alongside. New Inner Harbour includes Industry Harbour, Quay length 380 m., depth about 25 ft. alongside. Roll on/roll off terminal depth about 20 ft. minimum.
STEVEDORES: Since main commodities consist of bulk cargoes, such as iron-ore, coal, coke, bauxite, no specific requirements.
MEDICAL: Advance notice only required in urgent cases; hospital available.
BULK HANDLING FACILITIES: *Outer Harbour.* Facilities on Western part of quay include 3 stationary grain elevators with capacities of up to 250 t.p.h. and 2 floating elevators each of 250 t.p.h. capacity.

New grain silo, with 11,500 tons capacity equipped with 2 telescopic loading pipes. Handling capacity – 400 t.p.h. seawards, 100 t.p.h.

Inner Harbour. South quay equipped with 8 transporters, 1 of 7 tons, 4 of 15 tons, 2 of 25 tons and 1 of 40 tons lifting capacity each and 2 conveyor belt systems handling about 4,000 t.p.h. each.

North quay equipped with 4 transporters each of 15 tons lifting capacity and an ore conveyor belt system handling 1,000 t.p.h., max. 1,400 t.p.h.
TANKERS: Olhafen situated in Inner Harbour. Tankers up to 36 ft. draft discharge to Frisia Refinery.

Slops may only be discharged at the Tank Cleaning installation of Thyssen Nordseewerke GmbH.

Berth No. 1 is equipped with two 12-in. Woodfield type loading arms used for receiving crudes and loading fuel oils. There is one 8-in. loading arm for bunkering. The average discharge rate is 3,000 t.p.h. Oil Harbour contains 3 further berthing places for smaller vessels.
DENSITY: Average density in Port 1005–1010.
FRESH WATER: Available, supplied by barge, and alongside Outer Harbour Quay.
FUEL: All grades available.
GANGWAY/DECK WATCHMEN: Neither compulsory nor necessary.
OPENING/CLOSING HATCHES: To be performed by crew.
CUSTOMS ALLOWANCE: New Inner Harbour: Freeport. No restrictions on board vessels. Outer Harbour and Old Inner Harbour restrictions on bonded store. Some every 3rd day.
IDENTIFICATION CARDS: Not required.
CONSULS: Finnish (Vice-Consul), tel. 22084, Norwegian, tel. 20118, Swedish, tel. 21904, Netherlands, tel. 21404.
REPAIRS: All kinds of repairs possible.
DRY DOCKS: Schulte & Bruns (floating dock) length 281 ft., width 52 ft. 6 in., lifting capacity 1,300 tons.

Thyssen Nordseewerke GmbH (floating dock) length 426 ft., width 51 ft. 8 in., lifting capacity 3,500 tons. (Floating dock) length 579 ft., width 88 ft. 7 in. lifting capacity 11,300 tons (Dry dock) length 715 ft., width 97 ft. 8 in.

C. Cassens Schiffswerft (floating dock) length 220 ft. width 33 ft. lifting capacity 1,000 tons. (Floating dock) length 308 ft. width 52 ft. 5 in., lifting capacity 1,780 tons.
AIRPORT: Nearest airports Bremen and Hamburg, about 2–3 hours drive from Emden. World-wide connections. Flight Emden to Bremen or Hamburg possible by air-taxi.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: New Year's Day; Good Friday; Easter Monday; Labour Day (May 1st); Ascension Day; Whit Monday (June 17th); Prayer Day; Christmas Day; Second Christmas Day (December 26th). No work on New Year's Day, Easter Sunday, Whit Sunday, May 1st and Christmas Day.
POLICE/AMBULANCE/FIRE: Police 110; Ambulance 23 311; Fire 112.
TELEPHONES: Telephones can be placed on board if vessel berthed Northquay, Southquay or Thyssen Nordseewerke shipyard.
AUTHORITY: Port Captain, Wasser und Schiffahrtamt, Emden.
AGENT: Fritzen Schiffsagentur und Berederungs-GmbH, Neptunhaus, PO Box 109, Emden. Tel 04921 20011 (also after office hours).Telex 027821. Cables "Fritzenagent".

FLENSBURG: 54.48 N. 09.26 E.

PORT LIMITS: The seaward boundary is the line between a special boundary-stone on the Westside and the South corner of the Bluecher-Bridge on the Eastside of the port entrance.
DOCUMENTS: 2 crew lists, 2 passenger lists, 2 stores lists (bonded stores), EG cargo lists, bills of lading, general declaration, ship's certificates.
PILOTAGE: Pilot Station Flensburg, Schiffbrucke 12, D-2390 Flensburg, tel; (0461) 25150. Advance notice 5 hours before arriving Buoy 7 by Kiel Radio or agent (3 hours before leaving port). Pilot boards at Kalkgrund beacon near Buoy 7. Pilot will board in all weather if possible, otherwise pilot-boat will lead vessel to that position where pilot can board. Not necessary to anchor. Pilot-boat is a fishing-boat with "Lotse" written in white letters on both sides. Boat will show lights prescribed by international regulations and is fitted out with VHF Channel 6, 10, 16, 25, 26, 27.
ANCHORAGES: Just outside harbour entrance, N.E. of Mittelgrund and West of Kielseng leading lights. Depths of water between 12 and 19 m. muddy ground; same position for quarantine anchorage.
RESTRICTIONS: No specific restrictions; no tide, water-level variations depending only on the wind.
MAX. SIZE: Vessels up to 21 ft. draft can enter without hindrance, maximum draft 23 ft. Beam and length has to be in normal proportion to the draft of a seagoing vessel.
HEALTH: Generally free pratique for ships in the North Sea and Baltic Sea trade, ships coming from overseas ports pratique granted on arrival. Inform pilot if any suspected diseases on board. He will make necessary arrangements. A valid Deratting Exemption Certificate has to be on board.
RADIO: Kiel Radio, call sign DAO, tel. (0431) 39011, telex 02-0081.
VHF: None in Flensburg Port.
RADAR: There is no Port Radar Service.
TUGS: Harbour tugs are not available. If required, Flensburger Schiffsbau-Gesellschaft can supply one tug 470 hp, provided at least 3 hours notice given, ship's lines are used.
BERTHING: Powerstation-Quay length 170 m. depth of water 7.30 m. Harnis-Quay length 470 m. depth of water 6.00 m. Schiffbruck-Quay length 210 m. depth of water 6.50 m. Ballast-Quay length 140 m. depth of water 6.00 m. Depths of water refer to normal water-level.
CRANES: Powerstation-Quay 1 crane 5 tons and 1 crane 10 tons lifting capacity; Harnis-Quay 4 cranes 1 – 5 tons lifting capacity; all cranes are usable for general and bulk cargo.
BULK CARGO FACILITIES: No extra bulk cargo facilities available.
SPECIALISED CARGO-HANDLING FACILITIES: Not available.
BRIDGES: There are no bridges at Flensburg port.
STEVEDORES: Agents make all arrangements. Unloading rates depend on type of cargo. Bulk cargo discharge up to 160 t.p.h. per gang.
MEDICAL: Doctors, hospitals, ambulances available day and night.
TANKERS: 3 berths for tankers up to 1000 GRT with depths of water 5.70 m. and 5.00 m.; diameter of discharge lines are NW 200 and NW 80; average discharge of fuel and gasoil 300 cu. m. per hour.
DENSITY: Winter-time 1015; Summer-time 1012.
FRESH WATER: Available at all berths, delivery rate about 20 cbm/h from shore hydrants.
FUEL: Diesel available in any quantity. Fuel oil subject to 5 hours advance notice from 2 bunker stations and tank lorries.
FIRE PRECAUTIONS: No specific precautions.
CONSULS: Denmark, Nordergraben 19; others at Hamburg.
REPAIRS: Flensburger Schiffsbau-Gesellschaft carry out all ship repairs; outfit section equipped with one crane of 42 tons lifting capacity.
DRY DOCKS: One floating dock with 1,500 tons lifting capacity.
SURVEYORS: All main Classification Societies are present at Hamburg.
GANGWAY/DECK WATCHMEN: No watchman service available.
HATCHES: Opening/closing normally done by crew. Stevedores will perform this for additional payment.
CUSTOMS ALLOWANCES: For consumption on board merchant vessels for each crew member and per day 40 cigarettes or 20 whiffs or 10 cigars or 50 grams tobacco *and* 0.25 litre spirits *and* 3 litres wine are duty-free. If the ship stays for 3 days or longer it is usual to allow three-fold of the mentioned quantity. For shore leave 20 cigarettes are permitted for each person only. If a crew member leaves the ship for at least 3 days the regulations for tourists are applicable.
CARGO GEAR: All loading and discharging done by shore cranes, except elevator-work.
REPATRIATION: Possible at any time without difficulties.
AIRPORT: Hamburg-Fuhlsbuttel, 175 km. distant; 2.5 hours by train.
TIME: GMT plus 1 hour, permanent.
HOLIDAYS: See "Hamburg". No work on official holidays.
POLICE/AMBULANCE/FIRE: Police tel. 110, Fire/Ambulance tel. 112.
TELEPHONES: No installation on board ships.
SERVICES: No tank cleaning and slop disposal services. Compass adjusting possible, advance notice necessary.
SHORE LEAVE: Allowed.
IDENTIFICATION CARDS: Not required.
REGULATIONS: No particular or unusual regulations.
DELAYS: Normally no delays.
DEVELOPMENTS: One dredger is at work from time to time.
AUTHORITY: Stadtwerke Flensburg.

HAMBURG: 53.33 N. 09.59 E. (including Altona, Harburg and Wilhelmsburg) (See Plan Book)

DOCUMENTS:
6 Crew Lists
6 Passenger Lists.
2 Provisions and Stores Lists including Fuel Oil.
3 Dangerous Cargo Lists.
Health Certificates (forms obtainable from Pilot).
General Cargo Declaration.
Ship's Register.
Oil Liability Certificate for more than 2,000 tons of oil.

DEEP SEA PILOTAGE: See Brixham or Cherbourg and "General" before first German port.

PILOTAGE:

Pilotage–Anchorage River Elbe: See "General" before first German port.

Pilotage Port of Hamburg: Harbour pilots board the ships close to the Seemannshoft station. Harbour pilots can be called by VHF, Channel 9, morse or sound signal "G" (2 long and 1 short) or flag "G". Pilotage is not compulsory, but advisable to use Pilots in port.

Inward and outward harbour pilotage free for vessels loading and/or unloading at Hamburg.

ANCHORAGE: Available at several places between Elbe 1 and Hamburg. See "General" before first German port.

RESTRICTIONS: No restrictions imposed on night entry for any vessels.

MAX. SIZE: *Inward bound:* Vessels allowed draft of max. 42 ft. in saltwater on arrival Elbe 1 lightvessel, may enter only on rising tide under normal weather and tide conditions.

Container ships exceeding 35 ft. draft in salt water on arrival Elbe 1 lightvessel may enter only on rising tide.

Outward bound: Vessels up to 33 ft. draft in fresh water on departure from Hamburg may leave at any time.

Vessels exceeding 33 ft. draft in fresh water and up to 36 ft. on departure from Hamburg-Finkerwerder port pilot station may leave 1 hour after low water until 2 hours before next following high water.

Container ships up to 36 ft. draft in fresh water on departure from Hamburg may leave at any time.

Container ships exceeding 36 ft. draft in fresh water and up to 39 ft. on departure from Hamburg-Finkerwerder port pilot station may leave 1 hour to 2 hours after low water, but required to anchor at Brunsbuttel N.E. anchorage depending on tide.

Inward bound: Vessels exceeding 300 m. length or 45 m. breadth allowed draft to max. 38 ft. in salt water on arrival Elbe 1 lightvessel may enter only on rising tide.

Outward bound: Vessels allowed draft to max. 33 ft. in fresh water on departure from Hamburg-Finkerwerder port pilot station may leave 1 hour after low water until 2 hours before next following high water. Keel clearance of 10% of draft required.

Vessels over 30 ft. draft will proceed according to tidal conditions in order to reach Finkerwerder pilot station 1 hour before high-water.

The following Harbours can be reached: Also see "Shipmasters Report".

Harbour Name	*Max. draft subject to tide and berth (ft.)*	*At any time up to (ft.)*
Dradenau Hafen	27–36	27
Petroleum Hafen	23–34	24
Griesenwerder Hafen	27–35	27
Kohlenschiffhafen	23–33	26
Waltershofer Hafen	36–43	30–36
Kuhwerder Hafen	28–36	28
Obere Hafen	20–37	20–29
Rethe Neuhof HGL	30–43	30
Rethe Gaswerke	31–40	31
Kattwyk Hafen	35–43	35
Neuhofer Hafen	30–40	30
Rethe Hansamatex	29–37	29
Rethe Speicher	31–41	31
Schluisgrove Hafen	32–38	32
Hansaport	30—43	30
Harburg 4	26–35	26
Harburg 3	22–31	22
Harburg 2	30–40	30
Harburg 1	26–34	26
Kraftwerk Wedel	32–42.5	32
Rethe-Kruse	31–42	31
Blumensandhafen	35–43	35

The maximum draft is dependent on the prevailing Easterly or Westerly winds.

ETA: Master's telegrams via Norddeich Radio, call sign DAN, are passed on to Agent 24 hours a day, week-ends and holidays inclusive. For this reason it is advisable that Masters communicate with Agent via Norddeich Radio.

In order to avoid delay and extra charges Masters should cable their ETA at least 12 hours prior to arrival at Pilot station Elbe I to "Elbelotse Brunsbuttelkoog" via Norddeich Radio, stating the following details:

1. Name of vessel.
2. Gross register tons.
3. Date (2 figures).
4. Time (4 figures).
5. Place where Pilot is required.
6. Place of destination.
7. Draft in metres (4 figures).

For example:

Eta Fjordaas	41079	12	1600	Elbeone	Hamburg	1214
(1)	(2)	(3)	(4)	(5)	(6)	(7)

1 hour before arrival at Elbe I lightvessel Masters are advised to contact the pilot cutter by VHF Channel 13 or 16.

BRIDGES: To be passed by vessels bound for basins South of Kohlbrand.

	Situated	*Max. breadth (ft.)*	*Height above normal H.T. (ft.)*	*Depth at normal H.T. (ft.)*
Kohlbrand Brucke (a high-bridge)	across the Kohlbrand near Neuhof	558	175.5	48
Kattwyk Brucke (a drawbridge)	across the Suder Elbe, before Harburg	328	168	43.6
Rethe Brucke (a drawbridge)	across the Rethe, near Reiherstieg	164	130.3	41

HEALTH: Master required complete health certificate when Pilot boards. Only vessels with infectious diseases are subject to detention.

RADIO: All mesages to Agents, etc., through Norddeich Radio, call sign "DAN". Closer to port Elbe-Weser Radio can be contacted by VHF Channel 16. Ships reporting stations are on permanent duty at Cuxhaven: VHF Channel 12, safety and calling Channel 16; Brunsbuttel: VHF Channel 14, safety and calling Channel 16; Stadersand: VHF Channel 11, safety and calling Channel 16; Hamburg: VHF Channel 12, safety and calling Channel 16.

Hamburg Port Radio: VHF Channel 14 and 16.

All stations are on duty 24 hours.

RADAR: River Radar Service from Elbe 1 to Hamburg, see "General" before first German port.

Harbour Radar Service at the lower end of Seemannshoft, VHF Channel 19, "Hamburg I Radar Radio"; at the upper part of Seemannshoft, VHF Channel 20, "Hamburg II Radar Radio"; at the upper part of Lotsenhoft, VHF Channel 18, "Hamburg III Radar Radio".

TUGS: Normally join incoming vessels at Harbour Pilot station at Finkerwerder. Vessels' lines usually used. If tugs lines required, an extra charge is made.

BULK HANDLING FACILITIES:

Grain	*Maximum Draft*	*Length*	*Number of elevators*	*Capacity total/hour*
Hamburg–Kuhwerder Hafen	34 ft.	656 ft.	5	800 tons
Hamburg–Rethe/Stroh	37 ft.	753 ft.	3	750 tons
Hamburg–Rethe/Kruse	40 ft.	820 ft.	3	900 tons
Hamburg–Rethe/Makprang	36 ft.	753 ft.	11	1,300 tons
Hamburg–Neuhof	43 ft.	902 ft.	4	1,300 tons

There are 15 floating elevators with a capacity of 350/450 t.p.h.

	Quay length (feet)	*Max. safe draft (F.W.)*	*Max. height discharging gear above high water level (feet)*
Coal and Minerals:			
Hamburg–Tollerort	900	33 ft.	80
Hamburg–Harburg II	1,720	40 ft.	66
Elbehafen Brunsbuttelkoog Gmbh	1,968	37 ft.	98
Coal:			
Hamburg–Kattwyk	1,200	43 ft.	50
Hamburg–Strandhafen	560	36 ft. 6 in.	No restriction
Hamburg–Wedel	1,050	42 ft. 6 in.	No restriction
Fertilisers:			
Neuhof–Kalikai	1,215	40 ft.	60
Minerals:			
Hamburger–Stahlwerke	1,340	36 ft.	82
Hansaport	1,850	43 ft.	No restriction
Petcoke/Oxide:			
Hamburger Aluminium Werk Gmbh	600 ft.	36 ft.	No restrictions
Bauxite/Oxide:			
Aluminium Oxid Stad Gmbh (AOS)	1,080 ft.	43 ft.	62

CONTAINER HANDLING FACILITIES:

Terminal		*Length (m.)*	*Depth (m.)*	*No. berths*
Burchard–Kai		2,235	8–13	9 (2 Ro-Ro)
Tollerort Container 508 m.	total:	1,000	10–11	7 (2 cont.)
Africa Multi-purpose		1,600	9–11	11
Euro-Kai KG aA Griesenw. Damm		735	12–13	5 (2 cont.)
Unikai Shed 73–74		1,675	10–11	11 (1 cont.)

CRANES:
Abbreviations: B (Bridges), C (Cranes), MC (Mobile Cranes), FC (Floating Cranes).
Burchard-Kai: 4 B at 53 t, 3 B at 42 t, 1 B at 38 t, 12 C up to 25 t, 2 MC at 30 t.
Tollerort: 2 B at 48 t, 2 Cargo-Tainer Twin-Cranes up to 50 t, 6 C at 15 t, 12 C at 3–5 t.
Africa: 7 C at 33 t, 1 C at 8 t, 10 C at 3 t, 1 MC at 20 t.
Euro-Kai: 4 B at 45–53 t, 4 C at 25 t, 5 C at 6 t, 1 MC at 12.5 t.
Shed 73: 2B at 50 t, 8 C at 3 t, 1 MC at 60 t, 2 FC at 25–30 t.

STEVEDORES: Ordered by Agents, no additional ETA's required.

Working hours	
Monday to Friday	First shift 0650 to 1500 hrs.
	Second shift 1500 to 2310 hrs.
	Third shift 2310 to 0650 hrs.
Saturdays, Sundays and holidays	First shift 0700 to 1300 hrs.
	Second shift 1300 to 1900 hrs.
	Third shift 1900 to 0100 hrs.
	Fourth shift 0100 to 0700 hrs.

Work performed after 1500 hrs. Monday to Friday, on Saturdays after 1300 hrs., on Sundays and holidays is at overtime rates.

TANKERS:

	No. of berths	Max. Draft (FW)
Kohlfleethafen (Esso/B.P.)	2	43 ft.
Petroleumhafen	10	34 ft.
Kattwyk/Shell	2	43 ft.
Kattwyk/Petronord	1	43 ft.
Blumensandshafen	1	43 ft.
Neuhof/Hansamatex	4	37 ft.
Neuhof/Schindler	2	37 ft.
Harburg IV/Esso	2	34 ft.
Tankerlager Moorburg	1	40 ft.
Stadersand	1	35 ft.

Tanker cleaning and gas freeing facilities at Hansamatex, Shell-Kattwyk/Hog and some dolphin berths by boats.

DENSITY: Fresh water.

FRESH WATER: Available from shore at most berths. Also supplied by barge.

FUEL: All grades available from oil berths, or supplied by barge.

DEVELOPMENTS: Silo capacity for bulk cargo handled by pneumatic elevators is increased up to 500,000 tons at deep water. Capacity of further 500,000 tons is available. Maximum depth for bulk cargo vessels 46 ft.

Dredging of the Lower Elbe by a further 1.5 m. to 16 m. at mean high tide is underway. This depth will be sufficient for fully loaded 100/120,000 d.w.t. vessels, completion expected end 1978.

Port Extension Area. An industrial port area of 4,600 ha. with access for large sea-going vessels up to 120,000 d.w.t. is under development.

Hansaport: The new ore/coal terminal at Sandauhafen (operational from 1977) has a capacity of 15 millions tons p.a. Length of the two berths: 560 m; depth of water: 15 m. (MLW). Vessels up to 160,000 d.w.t. (partially lightened) will be able to berth.

WATCHMEN: Can be hired for all purposes. Normally arranged by Agent.

OPENING/CLOSING HATCHES: Normally by crew with the assistance of stevedores; otherwise, according to charter party.

CUSTOMS ALLOWANCES: No restrictions in the freeport area on board a ship. While not on board the ship in the freeport area or outside the freeport during shore leave or temporary leaving the ship up to 3 days, each Crew member allowed 20 cigarettes, 5 cigars and 50 grams tobacco. These quantities change when paying off.

CONSULS: All Maritime countries are represented by Consuls in Hamburg.

REPAIRS: All deck, hull and machinery repairs can be carried out by local shipyards at Hamburg. Underwater repairs and cleaning can be effected by divers with special equipment.

DRY DOCKS: *Blohm and Voss*, tel. 3061: 6 floating docks with lifting capacities up to 50,000 tons. Graving dock, capacity up to 320,000 d.w.t.

Howaldtswerke Deutsche Werft, tel. 7411: 9 floating docks, with lifting capacities up to 53,000 tons.

Norderweft, tel. 311471: 2 docks, for vessels up to 4,000 tons d.w.t. and slipway for vessels up to 60 m. length.

There are other slipyards providing floating docks with lifting capacities of up to 5,000 tons.

TIME: GMT plus 1 hour all year round.

HOLIDAYS: New Year's Day; Good Friday; Easter Monday; Labour Day (May 1st); Ascension Day; Whit Monday; National Day (June 17th); Prayer Day; Christmas Day; Boxing Day. No work on New Year's Day, Easter Sunday, May 1st, Whit Sunday and Christmas Day.

POLICE/FIRE/AMBULANCE: Police 110; Fire 112; Ambulance 110; Port Medical Service 321021.

SHIPMASTER'S REPORT: August 1978.

Recently vessel called at Hamburg to load a full load of steel beams for Iran under Time Charter. Originally charterers had asked me to calculate the full load with maximum S.W. draft of 38 ft. 00.875 in. with 10.5 in. F.W.A. and the weight came to more than 39,000 long tons. But later when we arrived at Hamburg, while checking with Port Authorities it was learnt that though vessels are allowed to come in with 42-43 ft. drafts fresh water, no vessels excepting, at times fast container vessels are allowed draft more than 36 ft. fresh water. This is generally not known to many operators even in Hamburg.

AUTHORITY: Hafendirektion.

AGENT: Wm. H. Muller & Co., Schiffahrts-Agentur G.m.b.H., Monckebergstrasse 31, D-2000 Hamburg 1. Tel. (040) 33.54.76. Telegrams "Batavier". Telex 2162926.

HOLTENAU, Kiel Canal: 54.22 N. 10.09 E. (See Plan Book)

For entrance from Baltic, refer to "Kiel".
For entrance from Elbe, refer to "Brunsbuttel".

LOCATION: Holtenau is a part of the town of Kiel, it is located on the Northern side of the entrance to the North Sea – Baltic Canal.

MAX. SIZE: The max. draft for the port of Kiel-Holtenau is 9.7 m.

BERTHING: The outer harbour of Kiel-Holtenau (Lat. 54° 22.2′ N. Long. 10° 09.2′ E.) in the N.E. part of the old lock fore port, with water depths of 3.5 to 4.5 m. and 280 m. long quay location serves vessels up to 3.5 m. draft, 85 m. long and 13 m. beam as a berthing point. At the quay not more than 3 ships with a total beam of 30 m. can lie next to each other. To the West of this, is a 125 m. long berthing pier, known as Kumobrucke, with 4.5 m. draft alongside for vessels up to 3 m. draft, 45 m. long and 8.5 m. beam. No more than 2 vessels may lie alongside each other.

Between this pier and the shore is a yacht harbour and a further anchorage for pleasure craft.

The inner harbour, to the East of the Holtenau main pier, can only be reached through the lock of the North Sea – Baltic Canal. From the anchorages in the inner harbour, vessels may not enter the locks without a Pilot where they are obliged to take on a Pilot for the North Sea to Baltic Canal.

The Gasworks quay, just to the West of the New Locks, has a length of approx. 210 m. and a nominal depth of 10.4 m. The quay has cranes with a lifting capacity up to 8.5 tons. Vessels up to 15,000 g.r.t. and up to 9.7 m draft can tie up at the Gasworks quay. To the West of it, is an approx. 94 m. long quay with piers for Wik-Holtenau passenger ferries.

To the East of the Holtenau main pier, is an approx. 536 m. long quay belonging to Zerssen and Co. This location is used mainly for fitting out and bunkering of vessels. On the North side of the inner harbour ships with dimensions permissible for the North Sea to Baltic Canal are accommodated at appropriate berths.

SERVICES: In Holtenau are a Service Station of the German Hydrographic Institute, a pilot station, an area Police contingent, Customs control, Port Doctor, Sailors' Central Control, Sailors' engagement office, and a sailors' hostel.

An office for marine charts and nautical publications is located at the lock; good facilities exist for the quick supply of ships' equipment, victuals and fuels. Repairs to machinery installations, radar and wireless apparatus, supply of spare parts, and also the exchange of crews can be arranged without long voyage delay virtually whilst a vessel is passing through the canal. Shipbrokers' services are available.

KIEL: 54.19 N. 10.10 E. (See Plan Book)

DOCUMENTS:

Stores List.
Bills of Lading.
Manifest.
Crew List.
Health Declaration.
Derat. Certificate.
If loading/unloading cargo, following also required:
Ship's Stores List.
Crew Possessions List.
Cargo Manifest.
Bills of Lading.
Customs Declaration.

Local Agents will advise Master on board regarding these Clearance Documents.

PILOTAGE: Not compulsory for Kiel Harbour. For Kiel Canal, vessels over 50 g.r.t. must take a Pilot, and vessels over 2,500 g.r.t. must employ a steersman. Pilot station, tel. 362858. ETA required in advance. Pilot boat can be found near Kiel Lighthouse and also off the entrance to Kiel Canal. Pilot boats are yellow with "Lotse" painted on both sides. Signal for Pilot is flag "G" over numeral pennant 1. Pilots for Kiel Harbour also available and recommended if port is not familiar.

ANCHORAGE: Safe anchorages at Kanalreede in 13 m. depth, and at Heikendorferbucht in 11 m. depth.

RESTRICTIONS: Non gas-free tankers must give advance notice of arrival and will require chemist's certificate before entering harbour area.

Speed limit 10 knots South of line Bulk/Ehrenmal Laboe.

MAX. SIZE: For Nordhafen and ships passing Canal, 315 m. length, 40 m. beam, 9.50 m. draft; fresh water. Depth at harbour quays: Binnenhafen, 10 m.; Scheerhafen, 10.50 m. A bulk carrier of 35,000 d.w.t., draft 35 ft. has discharged at Scheerhafen.

HEALTH: If suspected infectious disease on board, inform harbour authorities by radio in advance.

RADIO: Kiel Radio, call sign DAO. Tel. 39011.

TUGS: If required tugs normally join vessel just off berth. Can be ordered by Kiel Radio or through Agents.

BERTHING: No particular restrictions except for vessels in distress, or carrying explosives or tankers not gas-free. In these cases special permission of Harbour Authorities required for berthing.

Binnenhafen: Length of quay 2,500 m. Depths up to 10 m. 6 cranes with capacity up to 24 tons, also 2 mobile cranes.

There is a mobile roll-on/roll-off bridge, 18 m. wide. Max. axle pressure 70 tons.

At Sartori-Kai there is a silo with a capacity of 16,000 tons, and at mouth of the River Schwentine another with capacity of 17,000 tons and discharge rate of 80 t.p.h.

Oslo-Kai: The terminal is for the exclusive use of passenger and car ferries. Depth of water 7.5 m!

Scheerhafen: Length of quay 300 m. Depth 10.3 m. There are 2 modern high capacity cranes capable of lifting up to 10 tons. There is also a privately owned tanker unloading facility with storage capacity of about 70,000 cu. m. and facilities for receiving dirty ballast.

Nordhafen: Situated in the Kiel Canal. Length of quay 2,000 m. depth 11 m. Facilities available include a floating roll-on/roll-off bridge with permissible axle pressure of 60 tons, 6 cranes with capacities up to 25 tons, a 70,000 ton silo with drying capacity of 70 t.p.h. and 2 elevators each with capacity 125 t.p.h.

MEDICAL: Doctors, hospitals, ambulances available. Advance notice to Agents recommended if medical assistance required. Vessels coming from European ports need Derat. Cert. Vessels from other ports need in addition International Vaccination Certificates.

For all cases of poisoning needing special and urgent treatment telephone 597 3268, Medical University Clinic, Schittenhelmstrasse.

TANKERS: Unloading/Loading/Bunkering berths operated by private companies; slop discharge facilities available.

FRESH WATER: Available at all quays.

FUEL: All grades available. Preferable to order in advance through Agents.

FIRE PRECAUTIONS: Tankers should be prepared to leave port at any time. To be berthed with bow heading seaward. A valid Gas-free Certificate given by chemist in Kiel district is required before entering harbour area.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Normally by ship's crew. Can be arranged by stevedores if required.

CUSTOMS ALLOWANCES: 20 cigarettes per man per day. No alcohol.

IDENTIFICATION CARDS: Not required.

CONSULS:

Belgium	tel. 75079	Netherlands	tel. 3017235
Chile	tel. 30932	Norway	tel. 706600
Finland	tel. 3011601	Panama	tel. 51296
Liberia	tel. 63060	Sweden	tel. 3017/235

REPAIRS: All types of repairs possible.

DRY DOCKS: *Floating Docks.* No. 1, 1,500 tons; No. 2, 22,500 tons; No. 3, 3,500 tons; No. 4, 6,000 tons; No. 20, 1,700 tons. *Dry Docks:* No.. 5, 794 ft. long, 95 ft. wide; No. 6, 661 ft. long, 95 ft. wide; No. 7, 1,018 ft. long, 164 ft. wide; No. 8, 951 ft. long, 144 ft. wide. No. 8A, 1,395 ft. long, 292 ft. wide.

REPATRIATION: No restrictions. Can also be arranged in the locks of Kiel Canal by local Agents. Valid passports required.

AIRPORT: At Kiel, local flights to Hamburg. Nearest international airport at Hamburg, about 100 km. away.

TIME: GMT plus 1 hour. Permanent.

HOLIDAYS: New Year's Day, Good Friday, Easter (2 days), Ascension Day, Whitsun (2 days), 17th June, Atonement Day, Christmas (2 days). Work can be arranged on above holidays except Good Friday and Christmas Eve.

POLICE/FIRE/AMBULANCE: Police, te!. 110, alternatively 51171; Ambulance, tel. 44112, alternatively 61036; Fire, tel. 112.

TELEPHONES: Installed on wharves and Oslo quay (ferries to Scandinavia). Public phones near quays.

SERVICES: All services available.

SHORE LEAVE: Allowed.

AUTHORITY: Hafenkapitan, Hafenamt der Stadt Kiel and Hafen unt Verkehrsbetriebe der Stadt Kiel.

KIEL CANAL: (See Plan Book)

For entrance from Baltic, refer to "Kiel".
For entrance from Elbe, refer to "Brunsbuttel".

LUBECK (including Travemunde): 53.52 N. 10.40 E. (See Plan Book)

DOCUMENTS:

2 Crew Lists.
1 Health Declaration.
2 Cargo Manifests.
2 Stores Lists.
1 Ship's Particulars form.
Crew Manifest.
Bills of Lading.
Customs Declaration.
Derat. Certificate.

PILOTAGE: Compulsory for vessels over 300 g.r.t. Pilot station situated at Travemunde, near foot of Nordermole. Pilots board vessels in anchorage area. International signals used by Pilots and by vessels requiring a Pilot. Contact by VHF Channel 13 and 20.

RESTRICTIONS: Channel from Lubeck "A" buoy to Stadthafen is well lit and navigable by vessels fitted with radar in all weathers.

Depths: from "A" buoy to Travemunde (Nordermole) 10.5 m.; from Nordermole to Siechenbucht, 10 m.; channel to NWK power station, 9.5 m.; channel to Stadthafen 8.5 m. The river Trave narrows from 130 m. at seaward end to 90 m. at Stadthafen.

MAX. SIZE: Dependent on berth depth and approaches. Vessels up to 14,000 d.w.t. can reach Stadthafen. Also see "Restrictions".

HEALTH: Radio pratique possible. Pilot will ask Master to complete Health Declaration.

RADIO: Lubeck Radio, VHF Channel 27. Harbour Radio service used by Pilots, tugs, and other vessels.

TUGS: At Stadhafen vessels over 1,600 B.R.T. require 1 tug and vessels over 2,500 B.R.T. require 2 tugs.

BRIDGE: Herrenbrucke is 56 m. wide and 22 m. above water level. Can be opened for vessels requiring higher clearance.

MEDICAL: All facilities available. Hospital near docks at Travemunde, and at Lubeck.

BERTHING:

Travemunde: Passenger ferry harbour. North side river berths I and II, 10 m. depth; Kaiserbrucke, 100 m. length, 10 m. depth; Ostpreussen, 190 m. length, 8 m. depth; Prival (South side), 180 m. length, 5 m. depth. 8 berths for roll-on/roll-off and passenger traffic each 140–220 m. length, 7 m.–9.5 m. depth.

1 berth with railway connection. (Berth No. 6.)

Industriehafen: depth alongside, 7.8 m.

N.W.K. Power Station: depth alongside, 9.5 m.

Stadthafen: 27 km. from sea. Total length of quays 7.6 km. The harbour depth is 6 m.–8.5 m.

Elbe Lubeck Canal: navigable by barges up to 1,000 tons.

CRANES: 1 – 40 ton, 1 – 25 ton, 1 – 12 ton, also 3 ton cranes.

TANKERS: Two berths, length 150 m. Max. draft 8 m.

FRESH WATER: Available by barge at any location.

FUEL: All grades of bunker oil.

CONSULS: Denmark, Norway, Austria, Sweden, Iceland and Finland.

REPAIRS: Several shipyards available for deck and engine repairs.

DRY DOCKS: Floating docks for vessels up to 7,500 tons.

SURVEYORS: German Lloyd, others at Hamburg.

OPENING/CLOSING HATCHES: By crew.

REPATRIATION: All facilities available.

AIRPORT: Hamburg, 1.5 hours by bus or train.

TIME: GMT plus 1 hour.

HOLIDAYS: 1st January, Good Friday, Easter Sunday, Easter Monday, 1st May, Ascension Day, Whit Sunday, Whit Monday, 17th June, Atonement Day, Christmas Day, Boxing Day.

POLICE: Lubeck River Police, tel. 3 34 40; Travemunde River Police, tel. 5025.

TELEPHONES: Ship telephone connections at ro/ro berths.

SHORE LEAVE: Allowed.

AUTHORITY: Port Captain Lubeck.

NORDENHAM: 53.29 N. 08.29 E. (see also Bremen and Bremerhaven) (See Plan Book)

DOCUMENTS:

Cargo Papers & Ship's Certificate.
3 Stores Lists.
3 Crew Lists.
2 Personal Manifests.
Derat Certificate.

DEEP SEA PILOTAGE: See "General" before first German port.

PILOTAGE: Pilot boards off the Weser Light Vessel. Docking Pilot will board off Bremerhaven.

ANCHORAGE: Sea anchorage off Weser lightvessel or the Hoheweg Light. Max. draft 30 ft. River anchorage for vessels with a draft of 20 ft. off Blexen, 1 mile above Bremerhaven.

RESTRICTIONS: No restriction on night entry except vessels with a draft exceeding 38 ft. Vessels with a draft exceeding 32 ft. will be controlled by tidal conditions. Controlling depth in channel 11 m. MLW. In the port 9 m. to 12 m. at MLW (Midgard Pier).

MAX. SIZE: (The max. drafts are estimated). *Midgard Pier: (a)* Bulk cargo berth, total length 1,068 ft. max. beam 120 ft., max. draft 42 ft. 08 in.

(b) Oil berth No. 1 (combined with Southern part of 'a'), max. length 850 ft., beam 120 ft., draft 42 ft. 08 in.

(c) Oil berth No. 2, max. draft 32 ft.

(d) Granary, max. length 690 ft., beam 80 ft., draft 38–40 ft. (FW).

Guanowerk, max. length 550 ft., max. draft 29 ft. 6 in. (approx.).

Preussag, max. length 550 ft., draft 27 ft.

Asbestos wharf: Max. length 820 ft. (250 m.) up to a draft of 40 ft. at MLW.

Also see "Tankers".

HEALTH: Pratique granted immediately on arrival in port by Health Official.

RADIO: Norddeich Radio Dan or Elbe Weser Radio (VHF Channel 16).

RADAR: No port radar available. Radar for entrance see Bremerhaven.

TUGS: Ample available from Bremerhaven. Tug's lines used.

BERTHING: The following industrial works and companies within the port area of Nordenham possess a berth each for sea-going vessels which serve only their private supplies and requirements. These berths are situated North of Midgard Pier.

1. Norddeutsche Seekabelwerke Aktiengesekkschaft, (production of cables).
2. Felten & Guilleaume Schsltanlagen GmbH (production of electric appliances, motors, etc.).
3. Preussag Aktiengesellschaft (s.a.) (production of lead, zinc). Length of quay 230 m., depth of water 32 ft. 10 in. (approx.) 2 cranes of 5 and 3 tons. Capacity 80 and 50 t.p.h. respectively. Storage capacity, 50,000 tons (coal or ore). 10,000 tons (Metal blocks), 5,000 cu.m. (Sulphuric acid).
4. Guano-Werke Aktiengesellschaft (s.a.) (production of fertilisers). Length of quay 100.0 m. One gantry crane.
5. Erdolwerke Frisia Aktiengesellschaft (tanks for the storage of mineral oils).
6. Vereinigte Flugtechnische Werke GmbH (production of airplanes).
7. Asbestos Corporation GmbH (production of asbestos).
8. Weser Tanklager Gesellschaft mbH (storage of mineral oils, bunker oil station of BP).

Connections: Gas oil 2×8″, fuel 1×8″.

9. Titangesellschaft mbH (production of titandioxide).

Asbestos Wharf: Length 210 m. Extra mooring dolphins North and South of wharf 50 m. from each end of wharf. Depth alongside 12.5 m. at MLW. 1 grab crane for discharge of asbestos minerals into conveyor system of factory.

SPECIAL CARGO HANDLING FACILITIES:
Midgard Pier:

No. 1. Bulk cargo berth for discharging and loading, 5 bridges with a lifting capacity of 22 tons each. Max. outreach 24.5 m. Total capacity of ore per shift 10,000 tons.

No. 2. Oil berth. 3 pipe-lines 10 to 12 in. diameter for fuel oil, diesel oil and gas oil. No shore steam or facilities for dirty ballast available.

No. 3. Granary. 2 elevators with a total capacity of 700 t.p.h. Storage capacity of 46,000 tons.

STEVEDORES: 24 hours' notice required. Notice required Friday morning for week-end work.
1st shift: 0600–1400 hrs.
2nd shift: 1400–2200 hrs.
3rd shift: 2200–0600 hrs. (overtime).
on Saturdays: (grain and other bulk cargoes).
1st shift: 0600–1400 hrs.
2nd shift: 1400–2200 hrs. (overtime).
3rd shift: 2200–0600 hrs. (overtime).

MEDICAL: Hospital available; advance notice only required if urgent cases.

TANKERS: Diameter of lines 8 in.

Shell Berth: Max. size 34 ft.

Weser Tankerlager: Max. size 200 m., length 32 ft. draft at L.W. T-shaped mooring lines attached to pontoons fore and aft, middle lines are attached to the shore. Length of lines 100 m.

DENSITY: Average density of water 1005–1012.

FRESH WATER: Fresh water available at a rate of 15 t.p.h. per hose price 2 DM. per ton.

FUEL: All grades available; delivery by barge; 2 days' notice required.

FIRE PRECAUTIONS: Special regulations for vessels loading or discharging explosives.

CONSULS: See "Bremerhaven".

REPAIRS: Minor repairs can be carried out. Ample facilities for major repairs at Bremerhaven.

DRY DOCKS SURVEYORS: See "Bremerhaven" or "Bremen".

WATCHMEN: Not necessary but available if required by Master.

OPENING/CLOSING HATCHES: Normally by crew but if by stevedores extra charges will apply.

CUSTOMS ALLOWANCE: Each crew member 200 cigarettes or 30 cigars or 30 grammes of tobacco and 1 bottle of spirits for a running period of 3 days.

CARGO GEAR: In most cases loading and discharging is effected with shore gear. Special equipment can be ordered from Bremerhaven.

REPATRIATION: Possible by air via Bremen or Hamburg.

AIRPORT: Bremen, distance 70 km., 1 hour by car. Hamburg, 200 km., 3 hours by car.

POLICE/AMBULANCE/FIRE: Police 110; Ambulance 2052; Fire 112.

TELEPHONES: Available on request.

SHORE LEAVE: Permitted.

IDENTIFICATION CARDS: Are not issued.

REGULATIONS: Port regulations for the Midgard Pier including special regulations for handling of explosives.

DELAYS: None except waiting for high tide (see restrictions).

AUTHORITIES: Asbestos Corporation, GmbH., Nordenham, "Midgard" Deutsche Seeverkehrs-Aktiengesellschaft, Nordenham. And others.

STADERSAND: 53.37 N. 09.32 E.

Oil Terminal in Elbe River operated by Hamburger Mineralolwerke.

DOCUMENTS:
3 Crew Lists.
3 Personal Effects Lists.
3 Stores Lists.
Cargo Documents.
Ship's Register.

DEEP SEA PILOTAGE: See "General" before first German port.

PILOTAGE: See "General" before first German Port.

RESTRICTIONS: Draft calculated by adding 31 ft. to height of tide and allowing 3 ft. keel clearance.

MAX. SIZE: Length up to 600 ft.

HEALTH: Health Certificate brought on board by River Pilot for Master to complete.

RADIO: All messages to Agents, etc., through Norddeich Radio, call sign DAN. Closer to port Elbe-Weser Radio can be contacted by VHF Channel 16.

Ships' reporting station is on permanent duty at Stadersand, VHF Channel 11, safety and calling Channel 16.

RADAR: River Radar Service from Elbe 1 to Hamburg see "General" before first German Port, but no special Port Radar Service for Stadersand. Radar Service in the area of Stadersand available, can be contacted through VHF Channel 21, "Hetlingen Radar Radio".

TUGS: Available. Meets vessel off the berth.

BERTHING: 1 tanker berth at T-head jetty.

DENSITY: Brackish.

FRESH WATER: Only obtainable by barge from Hamburg. Minimum quantity supplied is 200 tons.

FUEL: Only obtainable by barge.

CUSTOMS ALLOWANCES: 100 cigarettes and 1 bottle wine/spirits per man.

CONSULS AND GENERAL INFORMATION: Refer to "Hamburg".

AGENT: See "Hamburg".

WILHELMSHAVEN: 53.31 N. 08.10 E. (See Plan Book)

DOCUMENTS:

Oil Port	2 Crew Lists. 1 Health Declaration (Form supplied by Pilot). Derat Exemption Certificate. Passports/Seamen's Books. Vaccination List.
Harbour Docks	2 Crew Lists. 1 Health Declaration. 2 Cargo Manifests. 2 Stores Lists.

DEEP SEA PILOTAGE: See "General" before first German port.

PILOTAGE: Jade pilot boats are 2-masted and have yellow funnels with black tops; the black hull has white inscription "Lotse" on both sides. By day flag "1" below flag "G" of international code is flown; by night, signal is to be given by morse signals, in bad weather by whistle or morse signals.

Pilot vessel stationed at mouth of Weser. To call Pilot for Jade, in addition to International Code signals the signal "J" is hoisted by day or flashed by Morse lamp at night. The same signal can be made on whistle in bad visibility. In bad weather pilot vessel may retire to Roten Sand (Weser River), near the light-buoy "G".

ETA required 12 hours prior arrival at Pilot station. Pilot vessel transmits and receives on VHF Channel 16.

Pilotage compulsory for vessels with dangerous goods. Vessels up to 60,000 d.w.t. take 1 Pilot at "Weser" lightvessel. Vessels exceeding 60,000 d.w.t. take 2 Pilots at "Deutsche Bucht" lightvessel.

Helicopter pilot service is available for vessels above 50,000 g.r.t. at "Deutsche Bucht" lightvessel.

ANCHORAGE: A deep-water mooring for large tankers lies South of the lightvessel "Deutsche Bucht". Ships which are waiting for a Pilot may anchor for a short while by the "Weser" lightship.

2 further anchorages for large and deep-draft vessels, the "North" and "South roads", have been made available to the N.E. and the S.E. of the "Weser" lightship.

Quarantine anchorage, and tanker lightening at Schillig Roads. Vessels waiting for a berth and with max. draft not exceeding 41 ft., may anchor at Wilhelmshaven North Roads. Vessels with draft exceeding 41 ft. must anchor near the tanker anchorage Schillig where the depth is at least 45 ft.

Vessels must report at the beginning of the area-way Jade River to radio station "Jade Revier Radio" on Channel 18 VHF. The area station will give information about movements. "Wilhelmshaven – Port Radio" on Channel 11, gives information about tugs, harbour Pilots and mooring/unmooring etc.

RESTRICTIONS: No restrictions on night entry. Vessels draft exceeding 55 ft., will be controlled by tidal conditions.

The lock opening times for No. 4 dock are announced in daily maritime bulletins.

Dock No. 4, dimensions of lock: 390 m. long, 57 m. wide and depth of 11.47 m. MLW. However, only smaller vessels use dock harbour as bollards for mooring larger ships not yet available.

MAX. SIZE: Max. LOA, 1,150 ft. Max. draft 65 ft. 07 in. Keel clearance of at least 8.5% of draft required. Also see "Tankers".

HEALTH: Radio pratique possible. Sea Pilot will hand Health Declaration to Master. If one of the questions is answered "Yes", Pilot will advise Port Health Officer. A valid derat. exemption must be produced.

RADIO: Norddeich Radio, call sign DAN. Elbe-Weser Radio can be contacted by VHF Channel 16.

TUGS: Compulsory. Tankers normally require at least 4 tugs of minimum 1,500 h.p. for berthing. Tugs meet tankers at anchorage near buoy "43". Only tug lines are used, charge inclusive. Tugs join vessels at buoy "35" when proceeding to Mobil Oil Terminal.

VLCC's meet the tugs at buoy "33" (Mobil Oil) or at buoy "39", when they are bound for NWO.

BERTHING: *Wilhelmshaven Dock Harbour:*

The following dock harbours can be reached:

Harbour Name	*Max. draft*		*Quay length*
Handelshafen	16 ft. 05 in.		600 m.
Grosser Hafen	20 ft. – 26 ft.	Bontekai about	500 m.
Verbindungshafen	18 ft.	Sudwestkai about	200 m.

SPECIAL CARGO HANDLING FACILITIES: There is no Container or Roll-on/Roll-off-traffic at Wilhelmshaven.

BULK HANDLING FACILITIES: The Rhenus-WTAG is the operator of cargo handling in the Handelshafen with its connection to railway, road and canal-system.

Equipment: Two modern gantry cranes of 8–15 tons and efficient mobile cranes. Storage facilities for bulk cargo to an amount of 70,000 tons, 1 silo with a capacity of 720 cu.m. and 2,000 sq.m. storage sheds for bulk and general cargo.

CRANES: Bontekai and Sudwestkai without shore cranes, but mobile cranes available. One floating crane for heavy lifts up to 100 tons is also available.

TANKERS: *Nord-West Oelleitung Terminal:* Position 53° 33′ N, 08° 08′ E. Distance from Weser lightvessel, 24 miles. Type of Berth, Finger Pier "T" head. Density 1025. Current velocity, 3-4 knots. Mean tidal range, 11 ft. 09 in. Nature of bottom, sand and mud. Vessels may berth and unberth day or night. Vessels exceeding 55 ft. draft enter only on rising tide. Fresh water available, Diesel and Fuel "C" available. When discharging, full capacity of ship's pumps required. Normal residues and sediments are acceptable without any water. Shore gangway available. Vessels berth port or starboard side alongside. No limit on length or beam. Max. draft, Berth No. 1 and No. 2 – 61 ft. Berth No. 3 – 51 ft. and Berth No. 4 – 66 ft.

Berth Number	*Grades Handled*	*Pipe-lines No/Dia.*	*Length*	*Load – Discharge Rate Tons/Hour*	*Maximum Pressure*	*Hoses*
No. 1	Crude Oil	1×30″	4920′	8000	220 lbs.	4×12″
No. 2	Crude Oil	1×30″	4595′	8000	220 lbs.	4×12″
No. 3	Crude Oil	1×30″	4920′	6000	220 lbs.	3×12″
No. 4	Crude Oil	1×40″	5500′	12800	375 lbs.	4×16″
No. 1	Fuel Oil	1×24″	5920′	250/500	110 lbs.	1× 6″
No. 2	Fuel Oil	1×24″	5575′	250/500	110 lbs.	1× 6″
No. 3	Fuel Oil	1×24″	5905′	250/300	110 lbs.	2×12″
No. 4	Fuel Oil	—	—	500/700	110 lbs.	various

Mobil Oil Terminal: Berth No. 1 and 1A. Position 53° 37′ 28″ N, 08° 08′ 30″ E. Distance from Weser lightvessel, 20 miles. Type of berth, Sea Island. Density, 1025. Current Velocity, 3-4 knots. Mean tidal range 10 ft. 6 in. Nature of bottom, sand and mud. Least depth of water from port entrance to berth, 18.5 m. (60 ft. 09 in.) at MLW. Vessels may berth or unberth day or night. Vessels exceeding 55 ft. draft enter only on rising tide. Fresh water available by barge. Fuel "C" and Diesel available. Dirty ballast facilities available, capacity 29,000 cu. m. seawater, 17,900 cu. m. fresh/brackish water, discharge rate, 2,400 cu. m./h. Vessels berth port or starboard side alongside. All ballast, including clean ballast, to be discharged ashore.

Shore gangway available. An under keel clearance of 1 m. is required at Berth No. 1A at MLW.

Berth No. 1. Max. LOA, 1,150 ft. Min. length, 800 ft. Max. draft, 65 ft. Depth at MLW 68 ft. 11 in.

Berth No. 1A. Max. LOA, 650 ft. Min. length, 500 ft. Max. draft at HW, 48 ft. 2 in. Depth at MLW, 41 ft.

Berth Number	*Grades Handled*	*Pipe-lines No/Dia.*	*Length*	*Load – Discharge Rate cu.m/h*	*Hoses*
No. 1	Crude Oil	1×44″	5000 m.	17500	4×16″
	Heavy Fuel Oil	1×30″	3000 m.	3200	2×16″
No. 1A	Heavy Fuel Oil	1×30″	3000 m.	3200	3×12″
	Light Fuel Oil	1×20″	3000 m.	3200	2×12″
	Gasoline	1×12″	3000 m.	950	1×10″

Mobil Oil Terminal: (Also see "Shipmasters Report"). Berth No. 2 and 3. Position 53° 37′ 12″ N., 08° 07′ 36″ E. Distance from Weser lightvessel, 20 miles. Type of berth, "L"-head jetty. Density, 1025. Current velocity, 3–4 knots. Mean tidal range, 10 ft. 6 in. Nature of bottom, sand and mud. Least depth of water from port entrance to berth 7.5 m. (24 ft. 7 in.) at MLW. Vessels may berth or unberth day or night. Vessels up to 21 ft. 4 in. may berth and unberth any time. Fresh water by barge. Diesel and Fuel "C" available. Dirty ballast facilities same as Berth No. 1 and 1A. Max. deballasting rates, Berth No. 2, 2×10 in. 1,800 cu. m. per hour. Berth No. 3, 2×8 in. 500 cu. m. per hour.

All ballast, including clean ballast, to be discharged ashore. Min. distance ship's side to manifold, 1.5 m. If reducer required to match shore flanges, at least 1.8 m. Shore gangway available. A keel clearance of 1 m. is required at MLW until silting developments after dredging can be firmly assessed. Vessels berth port or starboard side alongside.

Max. LOA, 400 ft., min. LOA, 263 ft. until about February 1976 when modifications will be made and size reduced to 180 ft. Beam, no limit. Max. draft, 31 ft. 8 in. (at HW). Depth of water at MLW 24 ft. 7 in.

Berth Number	*Grades Handled*	*Pipe-lines No/Dia*	*Length*	*Load – Discharge Rate cu.m/h*	*Hoses*
No. 2	Heavy Fuel Oil	1×20″	2000 m	2600	2×10″
	Light Heating Oil	1×20″	2000 m	2400	2×10″
No. 3	Heavy Fuel Oil	1×16″	2000 m	475	1× 8″
	Light Heating Oil	1×20″	2000 m	550	1× 8″
	Gasoil	1×10″	2000 m	550	1× 8″
	Gasoline	1×12/1×10″	2000 m	950/550	2×10/8″
	LPG	1×8″	2000 m	400	1× 6″

Niedersachsenbrucke: (Lower Saxony Bridge) The "Niedersachsen Bridge" which belongs to the state of Lower Saxony is equipped with a fuel oil discharge unit for supplying a large nearby plant. Small ships can be discharged by a portal crane of 15–18 tons. The land-side berth of the loading pontoon running parallel to the Ufer is about 12 m. depth, so that loaded tankers up to a size of 35,000 d.w.t. can come alongside this pontoon. Furthermore, on this pontoon a loading installation for caustic soda is available. A bulk discharger unit with a hourly capacity of 1,200 tons serves coal to a large nearby plant. Vessels of 80,000 d.w.t. and a draft up to 13.5 m. can be accommodated.

Drinking water in adequate quantities is available at all shipment pontoons in the Jade.

Bunker and diesel oil is available in adequate quantities from Nord-West Ollleitung and Mobil Oil A.G. At the "Niedersachsen Bridge" it is necessary to order a bunker vessel in advance.

DENSITY: Brackish water.

BRIDGES: 3 swing bridges affect entering dock harbour; these are opened to coincide with lock opening times.

STEVEDORES: 24 hours notice required. Bulk cargo discharge rate about 150 t.p.h.

MEDICAL: All medical facilities available.

FRESH WATER: Available by pipe-line.

FUEL: All grades available. 2 days notice required.

REPAIRS: Jadewerft Wilhelmshaven Dockyard (Handelshafen) for small repairs and a floating dock with a capacity of 1,100 tons.

GANGWAY/DECK WATCHMEN: Shore watchman recommended to attend telephone.

OPENING/CLOSING HATCHES: Usually by ship's crew.

CUSTOMS ALLOWANCES: Oil port is Customs free port. In dock harbour each man allowed 5 cigars or 40 cigarettes, or 50 grams tobacco and 50 pieces of cigarette paper; 1 unopened bottle wine/spirits.

DEVELOPMENTS: *Liquid gas berth:* To the North of Mobil Oil A.G. a liquid gas jetty together with another jetty for loading and discharging of liquid chemicals, liquid petroleum, gas and fuel oil is to be installed. The L.N.G. jetty will take gas tankers up to a capacity of 125,000 cu.m.

"Lower Saxony Bridge" (Niedersachsen Bridge): The "Niedersachsen Bridge" is to be extended. It is planned to provide facilities for the loading and discharge of large vessels up to 250,000 d.w.t. with dry and liquid bulk cargoes.

IDENTIFICATION CARDS: Required in oil port.

CONSULS: Denmark tel. 41061. Sweden tel. 26266. Finland tel. 8021.

REPAIRS: Facilities available for all deck and engine repairs. Repairs affecting main engine or steering gear intended to be carried out at the berths or at Wilhelmshaven anchorage, must be authorised by NWO, Mobil Oil A.G. and Port Authorities, when sufficient security tugs will be ordered to stand by. No additional charge for tugs if ordered before arrival. Permission for repairs depends on prevailing weather conditions and should be requested before arrival.

DRY DOCKS: Floating docks for vessels of 8,000 and 1,000 tons respectively. 1 small dry dock 50 m. by 10 m. by 2.8 m.

REPATRIATION: All facilities available.

AIRPORT: Nearest international airport at Bremen, distance 102 km.

TIME: GMT plus 1 hour. Permanent.

HOLIDAYS: Not observed in oil ports. 1st January; Good Friday; Easter Sunday; Easter Monday; 1st May; Ascension Day; Whit Sunday; Whit Monday; 17th June; Atonement Day; Christmas Day; Boxing Day. Work may be arranged on Easter Monday, Ascension Day, Whit Monday and Boxing Day.

POLICE/AMBULANCE/FIRE:
Police: 52400.
NWO Oil Port: Fire/Ambulance 621.
Mobil Oil AG.: Fire/Ambulance 551328
Niedersachsen Bridge: Fire/Ambulance 50308 or 26121.
Dock Harbour: 112 or 26121.

TELEPHONES: May be placed on board all tankers in oil port. At some locations in dock harbour, installation by Post Office, which require 2 days notice.

SERVICES: All services available including tank-cleaning, diving, compass adjusting, etc.

SHORE LEAVE: Allowed.

SHIPMASTERS REPORT: Mobil Sea Island (Platform):

Position: Between Jade River buoys Nos. 18 and 19.

Pilotage: Sea Pilots (2) board/leave at Deutsch Bucht Light Vessel by helicopter.

Berthing Pilots (2) board/leave about 2 to 3 miles North of Sea Island by launch.

Pilotage straightforward to Weser Light Vessel where river passage begins.

Two bad bends here make strict attention to steering and helmsman necessary.

Passage Time:

Inward (VLCC – half cargo)	
Sea Pilotage	3 hrs 50 mins
Berth Pilotage	54 mins
Mooring	57 mins
Pilotage distance	41 miles
Outward (VLCC – Ballast)	
Berthing Pilotage	39 mins
Sea Pilotage (to 8 miles South of Light Vessel)	2 hrs 24 mins
Pilotage distance	31 miles

Helicopters: Base for the 3 German rivers at Wilhelmsport.

First contact one to two hours before arrival at Deutsch Light Vessel via Norddeich Radio Channel 16-27 when ETA confirmed and that vessel is familiar with helicopter procedures.

Thereafter continuous watch on Channel 16 VHF until helicopter contact will require continuous calling on 410 kcs and listening out on Channel 9 VHF until operation completed.

Berthing/Unberthing: Carried out at slack water only. Deep laden VLCCs on high water only. Ballast or half-loaded VLCCs on either slack water. Deep laden VLCCs can only proceed inward on flood tide.

Tugs: Six tugs used for any VLCC movement, 1 forward, 1 aft and 4 "pushers".

Moorings: Standard VLCC mooring arrangement. Springs run out first.

Cargo: 4×16 in. Chicksan booms available. Discharge rates compatible with modern VLCC facility. Official outturn figures average 1.5% less than ship figures.

Crude Oil Washing: Subject prior permission this is allowed.

Air Pollution: Monitoring of gas emission from tank venting system carried out during ballastings. If readings high, ballasting rate must be adjusted to keep readings within set parameters (parameters not known).

Documentation: As per "Guide". *Important that Certificate of Financial Responsibility is on board otherwise vessel fined (up to a maximum of D.M. 10,000).*

Shore Leave: Permitted. Ferry is on call when required from Island to mainland berth. Refinery jeep is then on call from Gate House. It is forbidden to walk in Refinery area. Taxis can be called from Gatehouse.

General: The Sea Island is in the "free port" area, therefore, no personal effects lists or other customs problems. Authorities inflexible if certification problems arise (Certificate of Financial Responsibility).

AUTHORITY: Wasser und Schiffahrtsamt Wilhelmshaven.

NOTES

Please also advise Shipping Guides Ltd.

GENERAL:

HEALTH: *Pratique procedure:*

1. The Port Health Officer or authorised officer shall grant to a ship as soon as the following conditions shall have been properly complied with:—

(a) The Master shall complete accurately to the best of his knowledge and belief a Maritime Declaration of Health Form.

The Declaration shall be countersigned by a ship's surgeon if one is carried and shall be delivered to the Port Health Officer or authorised officer.

(b) The answers to the questions in the Declaration shall clearly indicate the absence of any infectious disease on board during the voyage or on arrival of the ship, and that the ship has not called at any infected area or had direct contact during the voyage with any ship from any infected area or having on board any case of infectious disease, and shall satisfy that Port Health Officer or authorised officer that the granting of pratique shall not be attended by any danger.

(c) The Master or any other person on board including a ship's surgeon, if one is carried, shall accurately and, completely answer any other questions put to him by the Port Health Officer or authorised officer in regard to the sanitary condition of the ship, the health of the passengers and crew or of any ship with which there has been direct contact during the voyage, and shall furnish any such officer with all such information and assistance as he may reasonably require.

2. In the event of any suspected disease or fever on board a ship before arrival at the port and any other circumstances requiring the attention of the Port Health Officer, the Master shall:—

(a) If the ship is equipped with a suitable radio transmitting apparatus and is due to arrive at a radio receiving port, send before arrival, either directly to the Port Health Officer or through an Agent approved by him, a radio message to that effect.

(b) If the ship is not so equipped or is due to arrive elsewhere than at a radio receiving port, notify the Port Health Officer immediately on arrival of the presence on board of such infectious disease, or suspected conditions.

Any radio message sent shall:—

(a) embody such of the items of information as are applicable;

(b) be sent so as to reach the Port Health Officer not more than 12 hours, and not less than 4 hours, before the expected arrival of the ship;

(c) if it is in code, conform with the section relating to standard quarantine messages of the 1931 International Code of Signals.

3. Any ship arriving at its first port of call in Ghana from a foreign port shall be deemed to have come from an infected local area, and shall be required to comply with the provisions as to flags and signal lights as prescribed until granted free pratique by the Port Health Officer or authorised officer.

The following signals are to be shown on arrival within 3 miles of land, by vessels requiring or required to show their state of health:—

(a) in the daytime i.e. during the whole of the time between sunrise and sunset.

(i) "Q" flag signifying "my ship is 'healthy' and I request free pratique" or;

(ii) "Q" flag over first substitute ("QQ") signifying "my ship is 'suspect', i.e. I have had a case or cases of infectious disease more than 5 days ago, or there has been unusual mortality among the rodents on board my ship" or;

(iii) "Q" flag over 'L' flag ("QL") signifying "my ship is infected" i.e. I have had a case or cases of infectious disease less than 5 days ago!

(b) by night i.e. during the whole of the time between sunset and sunrise, a red light over a white light, the lights being not more than 6 ft. apart shown at the peak or where the signal can best be seen from the shore, and exhibited only when the ship is within the presence of a port signifying "I have not received free pratique".

(c) Any ship displaying the appropriate signal in accordance with the provisions of paragraph (3) above shall, as soon as practicable, be visited by the Port Health Officer or authorised officer, who shall grant pratique or take such other steps as may be necessary before granting pratique.

4. A ship which has been granted free pratique at its first port of call in Ghana which has not been declared an infected area shall not be required to obtain further pratique at another port in Ghana.

Vaccination requirements in respect of persons arriving in Ghana

All officers, crew and passengers of every ship arriving at any port in Ghana shall be in possession of valid Certificates of vaccinations against smallpox, yellow fever and cholera.

Where a person arrives at any port in Ghana and is unable to produce a valid Certificate as required, the Port Health Officer or the authorised officer shall require such person to be vaccinated on the spot or to present himself at a place or places for the purposes of being vaccinated.

Under no circumstances should any officer, crew or passenger disembark if he is not in possession of any valid Certificate against smallpox, yellow fever and cholera.

TAKORADI: 04.53 N. 01.45 W. (See Plan Book)

PORT LIMITS: Are shown on Admiralty Chart 3102 and covers an area of about 1.5 to 2 miles outside harbour entrance.

DOCUMENTS:

Customs:

2 Stores Lists.
2 Lists Crew Personal Effects.
1 Bill of Health.
6 Crew Lists with dates smallpox and yellow fever inoculations.
6 Passengers Lists or 'Negative'.
6 Vessel's Itinerary Lists.
1 Freighted Cargo List.
1 Unfreighted Cargo List.
1 Set Bills of Lading.
Clearance from last Port.

Immigration Officer:

Crew List.
1 List Port of Call.
1 List of Passengers, if any.
All crew and Passengers Passports.
Advice to Immigration of any stowaway.

PILOTAGE: Pilotage compulsory for ships berthing alongside or on the moorings. Pilot boards within port limits. International code signals used. Pilotage for entering vessels from 0600–1800 hrs. and for leaving vessels from 0600–2300 hrs.

ANCHORAGE: Vessels may anchor outside the harbour without Pilot. Depth at moorings 22 ft. to 35 ft.

RESTRICTIONS: Depth at harbour entrance 35 ft. MLW.

MAX. SIZE: Up to 28 ft. draft for berthing alongside. Up to 33 ft. at buoys. Also see "Tankers".

HEALTH: See "General" before first Ghana port.

RADIO: Radio Takoradi. The station is a Coast Station and only operates on H.F. and M.F. equipment. The call sign for this station is 9GA.

VHF: Signal station Channel 14. 24 hour service for all information with regard to Pilots, berthing, etc.

RADAR: No radar services available.

TUGS: Tugs normally join the vessel outside port entrance. Tugs assistance is compulsory to be ordered through Signal Station. 2 tugs of 1,350 h.p. and 1 of 850 h.p. available.

BERTHING: Additional coir springs from shore required at all berths.

Cargo discharging and/or loading at the buoy berths is by ships' own gear.

Berth	*Max. Length Vessel*	*Max. Draft*
Manganese	520	28 ft. 0 in.
2 Wharf	550	26 ft. 0 in.
3 Wharf	500	28 ft. 6 in.
4 Wharf	600	28 ft. 0 in.
5 Wharf	270	28 ft. 0 in.
6 Wharf	500	29 ft. 0 in.
Bauxite	505	32 ft. 0 in.
Coal Wharf	250	14 ft. 0 in.
Oil Wharf	600	29 ft. 3 in.
1 Buoys	550/610	F.32 ft. 6 in. A.34 ft. 0 in. (If ship 610 ft. max. 27 ft. 6 in.)
2 Buoys	550	F.30 ft. 6 in. A.31 ft. 0 in.
3 Buoys	570	27 ft. 0 in.
4 Buoys	520	F.27 ft. 0 in. A.30 ft. 0 in.
5 Buoys	510	F.24 ft. 0 in. A.27 ft. 0 in.
6 Buoys	480	F.24 ft. 0 in. A.26 ft. 0 in.
7 Buoys	450	F.23 ft. 0 in. A.25 ft. 0 in.
8 Buoys	400	F.21 ft. 0 in. A.22 ft. 0 in.
9 Buoys	340	18 ft. 0 in.

CRANES: There are 35 Portal Cranes at the Port. Of these 15 cranes of 3 tons each and 1 crane of 15 tons lifting capacity are at the wharf berths for loading and discharging vessels. The remaining 19 cranes – 6 of 10 tons, 1 of 7 tons, 1 Butters crane of 15 tons and 9 of 3 tons are placed at the West Wharf to cater for the loading and discharging of logs and other commodities. Two of 5 tons are at the Cargo Platform to load and discharge other commodities. In addition there are 20 gantries for loading and discharging sawn timber.

There are no cranes at the buoy berths and ships are expected to use their own gear. Also, there are no floating cranes at this Port.

BULK CARGO FACILITIES: There are 2 berths for the loading of dry-bulk cargo – manganese ore and bauxite. In the case of grain, coal, fertilisers, sulphurs, copra, etc., discharge can be done at any of the wharf berths. The loading rate of manganese ore is approximately 333 long tons per hour; and the loading rate of bauxite is 330 long tons per hour.

SPECIALISED CARGO HANDLING FACILITIES: The port does not have container or ro/ro handling facilities.

BRIDGES: There are no bridges at the port.

STEVEDORES: Berthing meetings are held daily between the Port Authority and all Port Operators with the view to determining ETA and EDD of vessels to enable the stevedoring companies to arrange for gangs and determine the relevant rates and charges.

Normal working hours: weekdays 0700 hrs. to 1200 hrs. and 1400 hrs. to 1700 hrs. Saturdays 0700 hrs. to 1200 hrs.

Gangs required for Sunday work should be ordered before 1130 hrs. previous day. For weekday work, gangs should be ordered before 1500 hrs. previous day.

MEDICAL: It is absolutely necessary for the Agents to be notified in advance of the required medical attention so that necessary arrangements for medical exercise be carried out immediately on the vessel's arrival. Also see "General – Health".

TANKERS: Oil tankers moor on the North side of Lee breakwater. 1 berth suitable for ships of 600 ft. length, draft 29 ft.

Pipe-line: 805 m. long, pipe size 8 in. for all grades of petroleum and Bitumen.

Discharge Rate:

Petroleum	–	Premium Mogas	150 t.p.h.
		Regular Mogas	150 t.p.h.
		A.G.O.	200 t.p.h.
		Kerosene	200 t.p.h.
Bitumen		80/110–142 cu.m. per hour	
		60/70 –154 cu.m. per hour	
		12/18 –337 cu.m. per hour	

DENSITY: Salt water.

FRESH WATER: There is fresh water at all wharf berths and delivery is by means of water hydrant and/or water barge of 448,000 gallons capacity. Fresh water is also delivered at the buoy berths by 2 water barges (capacity 200 tons). The rate of delivery is as follows:–

By hydrant – 11,000 gallons per hour.
By barge – 11,000 gallons per hour.

FUEL: 2 grades available, Fuel and Gas Oil. Advance notice is necessary.

Fuel – 1,500 gallons per second through pipe-lines.
Gas Oil – 37.8 gallons per second through mobile tanker.

FIRE PRECAUTIONS: 6 firemen ordered to standby with fire engine. "No Smoking" notices are posted at considerable distances from the tankers.

CONSULS: There are no consuls in this Port. High Commissioners and Ambassadors are in Accra.

REPAIRS: Minor repairs can be effected, slipway for vessels up to 500 tons. Small drydock for vessels up to 100 ft. length.

DRY DOCK: There is no large drydock in this port but there is 1 small drydock capable of accommodating vessel of 100 ft. long, 25 ft. wide and 8.5 ft. draft.

SURVEYOR: Lloyds representation only operates in this Port.

GANGWAY/DECK WATCHMEN: Provision of Gangway, Deck and Hatch Watchmen is absolutely necessary to prevent stealing, pilferage and smuggling on board ships.

HATCHES: Hatches are normally opened and closed by the stevedoring gangs or, at times, by the ship's crew.

CUSTOMS ALLOWANCE: Quantity permitted for each member of the crew to be held Out of Bond is as follows: Tobacco 100 grammes; Spirit 0.75 litres; Wine 0.75 litres.

CARGO GEAR: Load/discharge is affected by the Port Authority's shore gear. There is 1 heavy lift crane of 15 tons capacity which is used for heavy lifts. Where the cargo exceeds the lifting capacity of the shore crane, the ship's jumbo derrick is sometimes used.

REPATRIATION: The Immigration Department is responsible for signing on and off on the advice of the shipping company.

AIRPORT: The distance of the airport from the Port is approximately 2 miles. It is served by regular airline to and from the capital city of Accra; and the number of flights is 2 per week.

TIME: The Greenwich Meridian Time is applied to this Port as the Greenwich Meridian passes through this country.

HOLIDAYS: The holidays at the Port are as follows; New Year's Day (1st January); Redemption Day (13th January); Independence Day (6th March); Good Friday (non-working day); Holy Saturday; Easter Monday; Republic Day (1st July); Christmas Day (25th December) (non-working day); Boxing Day (26th December).

POLICE/AMBULANCE/FIRE: Telephone 999 for all 3 services.

TELEPHONES: Presently no arrangements exist for installing telephone on board ships.

SERVICE: There is no special service for tank cleaning, tank-washing or compass adjustment.

SHORE LEAVE: Every member of the crew is free to go ashore at any time of the day or night after the Immigration Officer has issued shore passes to that effect on the ship's arrival.

IDENTIFICATION: Seamen's Book or Passport is sufficient to identify any seaman.

REGULATION: Ship's are not allowed to discharge on board explosives or petroleum without prior approval of the Port Manager. Ships are not allowed to berth after 1800 hrs.

DELAY: Delays in berthing a ship occur when all berths are occupied; delays also occur when repairs are being carried out on any of the berths.

AUTHORITY: Ghana Railway and Ports Authority.

AGENT: Scanship (Ghana) Limited, P.O. Box 329, Takoradi. Tel: 35.31. Telex: 2181 Accra. Cables: "Scanship Takoradi".

TEMA: 05.38 N. 00.01 E. (See Plan Book)

DOCUMENTS: *Arrival.*

2 copies List of Stores.
2 copies Crew Declaration Forms.
1 Bill of Health.
6 Crew Lists with vaccinations lists for smallpox and yellow fever.
6 copies of Passenger List (or "nil" pass. list).
Valid certificates for smallpox, cholera and yellow fever vaccinations.
6 lists of Ports of Call.
2 Freighted Cargo Manifest.
7 Unfreighted Cargo Manifest.
1 B/L's set.
Port clearance from Last Port.

Departure – Port clearance visaed by customs.

PILOTAGE: For Main Harbour pilotage for all vessels of more than 100 net tonnage, when arriving or leaving harbour, or shifting berth, but for both Fishing Harbours obtainable on request.

Time of pilotage as follows: for Main Harbour:

(*a*) Dry cargo vessels: arrivals 0600–1800 hrs.; departure 0600–2300 hrs.
(*b*) Tankers: arrivals daylight only; sailings 0600 to 2300 hrs.
(*c*) Valco-carriers: all handling, during daylight only.

For fishing harbours: during daylight only.

Vessels arriving or wishing to enter harbour must await Pilot between E. and S.W. off outer water light, about 1 mile distance. Ships embarked by Pilots from 0600 hrs., according to time of arrival Quarantine Anchorage.

ANCHORAGES: Good anchorage, three-quarters to two miles from E.N.E. to S.W. off main entrance with depth 30 to 60 ft., with good holding ground. Eastern area of anchorage is more comfortable, without additional swell reflected from main breakwater.

RESTRICTIONS: Ships Arrival – 0600-1800 hrs. (on special request to 2000 hrs.). Ships Departure – 0600-2300 hrs.

MAX. SIZE: Ships up to 650 ft. and draft of 32 ft.

HEALTH: All crew require valid certificates of vaccination against smallpox and yellow fever which are inspected by Port Health Authorities. In case of any suspected disease or fever on board. Agent of the vessel should be notified in advance by radio. Also see "General" before first Ghana Port.

RADIO: All messages to Agents through their own VHF radio – Channels 6, 12 and 20.

VHF: The ports are equipped with VHF radio telephones, Channels 13, 14 and 16. Channel 16 is the international listening channel and Channel 14 is the port working channel. Channel 13 can be used if required, or if the other channels are not available. Signal station request LOA and draft in feet and last port of call.

TIDES: Maximal tides rise 6 ft. 2 in., minimal tides rise 3 ft.

PREVAILING WINDS: Light to fresh breeze from W. and S.W. during all year, except December to February when N.E. Harmathan is dominating with poor visibility. Dangerous winds are tornados from East, May to July, but occasionally isolated tornados are to be expected from January to December. There is a swell in harbour, especially after tornados, when lying alongside the berths.

HARBOUR: Harbour consists of 3 basins:

(*a*) The large basin of Main Harbour, formed by Main Breakwater 6,250 ft. long, and Lee Breakwater, 3,650 ft. long.
(*b*) Outer Fishing Harbour, East of Lee Breakwater.
(*c*) Inner Fishing Harbour on Northern side of former one.

Entrance to Main Harbour 800 ft. wide and together with the approaches has minimal depth of 35 ft. (Admiralty Chart Datum to which all depths refer).

Ships entering Harbour 2–3 cables before entrance roll heavily, up to 4–8° during some seasons. Ship's deeper than 30 ft. enter only during high tide with maximum possible draft limit 32 ft. during neap tide. Bottom of harbour consists of sand and mud, with frequent hard rocky ground. Depth increases in direction of Main Breakwater. Two pairs of mooring buoys in depth of 34–36 ft. Inside harbour, alongside Lee Breakwater is an Oil Wharf for tankers with depth of 34 ft.

TUGS: Use of 1 tug compulsory for all ships over 2,000 g.r.t. and 2 tugs over 5,000 g.r.t. (but at Pilot's option), and 2 tugs compulsory for tankers and Valco-carriers. 2 Diesel Tugs 1,300 h.p. and 2 Steam Tugs 850 h.p. in service. 2 tugs available for duty between 0600 and 2100 hrs., otherwise 1 tug. Tug's wires to be used.

BERTHING: Quay No. 1 – 4,300 ft.; Quay No. 2 – 2,900 ft.

Berths	*Length*	*Max. Draft*
1	600 ft.	31 ft. 6 in.
2	600 ft.	28 ft. 6 in.
3	485 ft.	24 ft. 6 in.
4	600 ft.	25 ft. 9 in.
5	600 ft.	25 ft. 6 in.
6	600 ft.	24 ft. 6 in.
7	600 ft.	26 ft. 6 in.
8	600 ft.	24 ft. 9 in.
9	600 ft.	25 ft. 0 in.
10	600 ft.	24 ft. 6 in.
11	600 ft.	24 ft. 6 in.
12	600 ft.	25 ft. 6 in.
Oil Berth	Ships up to 650 ft.	32 ft. 0 in.
Valco Berth	Ships up to 600 ft.	31 ft. 6 in.

Berths No. 6 and 7 for loading cocoa-beans, equipped with 4 high-speed conveyers, transporting bags directly to ship's hold, from 4 cocoa sheds (totalling 2,400,000 cu. ft.) situated at Westerly corner of harbour.

Usually ships moor starboard side to berths No. 1, 2, 6–9 and portside to berths No. 3, 4, 5, 10–12.

SPECIALISED CARGO HANDLING FACILITIES: 3 special berths for bulk cargoes only: Berth No. 10 for grain only. It is equipped with 1 elevator for sucking/discharging.

Valco Berth for handling bulk cargoes such as alumina, pitch/coke and aluminium fluoride. It is also equipped with 2 elevators for sucking/discharging.

Berth No. 8 is partly meant for pumping/discharging of liquid/bulk chemicals such as tallow and alicane.

Cranes, Outloaders:

Quay No. 1	10 Portal Cranes	Cap.	(2) 5 ton	(2) 7.5 ton	(6) 3 ton
Quay No. 2	8 ,, ,,	,,	(2) 5 ton		(6) 3 ton
	3 Mobile Cranes	,,	(1) 5 ton	(1) 10 ton	(1) 25 ton

Cocoa Conveyor System: 4 Outloaders, each 30-35 t.p.h.
or : 2 Outloaders on high speed =70 t.p.h.

STEVEDORES: Available. Dry cargo is handled from 0730 hrs. to 1230 hrs. and from 1400 hrs. to 1700 hrs. on normal working hours, and overtime after 1700 hrs. to 2000 hrs. (for finishing ships 2030 hrs.) and on Saturdays p.m., Sundays and holidays. Oil Wharf and Valco Berth are working around the clock.

Gangs required for Sunday work should be arranged before 1130 hrs. previous day. For weekday work, gangs should be arranged before 1500 hrs. previous day.

Stevedores provided by Ghana Handling Company Ltd., Atlantic Port Services and Speedline Stevedoring Company Ltd.

TANKERS: Tankers always moored starboard side to dolphins, and ropes to breakwater and bow-buoys. Crude oil pumped to refinery, by ships pumps, a distance of 18,000 ft.

North of Oil Wharf about 2 cables on same breakwater is Valco Berth for discharging of bulk materials for "Valco" aluminium smelter (mostly alumina). Narrow channel 250 ft. wide leads to berth with depth 33 ft. 6 in.

FRESH WATER: Water pipes alongside all wharves, and under State's sanitary control. Rate of supply 50 t.p.h.

FUEL: Fuel and diesel-oils available by tanker-trucks only. No coal-bunkers available.

DENSITY: About 1024.

FIRE PRECAUTIONS: Oil tankers when moored alongside must have "Fire Wires" hanging over the bow and stern on the outboard side of the vessel. These must be lowered to the water's edge and securely made fast on board so that they can be used to tow the ships away if necessary in an emergency. Two large fire fighting pumps and "snorkels" are mounted at the oil wharf. A floating boom to prevent the spread of oil spillage must be put in position around tankers loading and discharging. The Master of the ship should be warned to lower the guy ropes securing the boom to the ship, so that the boom is afloat at all times and not lifted up as the vessel's draft changes.

REPAIRS: Good marine-workshop.

DRY DOCKS: There are two (2) drydocks.

Drydock No. 1: Serviced by 60 tonnes and 20 tonnes travelling cranes. Capacity: 100,000 d.w.t. Length: 910 ft. (277.4 m.). Width (entrance): 149 ft. (45.4 m.) Width (inside wall): 155 ft. (47.2 m.). Draft (entrance): 22 ft. (6.7 m.) (to be deepened in future). Flooding time empty dock: 2 hrs. (approx.). Dewatering time: 4 hrs. (approx.).

Drydock No. 2: Serviced by 45 tonnes and 25 tonnes mobile cranes. Length: 350 ft. (106.7 m.). Width: 44 ft. (13.4 m.). Draft (entrance): 18 ft. (5.5 m.). Flooding time of empty dock: 4 hrs. (approx.). Dewatering time: 4 hrs. (approx.).

Also there is one slipway with length 127 ft. (38.7 m.); width: 41 ft. (12.5 m.) and hauling capacity: 150 tonnes.

Fitting out quay: 600 ft. (182.9 m.). Draft: 14 ft. (4.3 m.) to be deepened. Crane: 15 ton travelling crane.

SURVEYORS: Lloyds and Bureau Veritas are represented at the port.

GANGWAY/DECK: WATCHMEN: Services of watchmen necessary and compulsory.

HATCHES: Opening/closing of hatches is normally carried out by stevedores.

CUSTOMS ALLOWANCES: Per crew member: Tobacco: 100 grammes; wine: 0.75 litres; Others: 0.75 litres.

REPATRIATION: Facilities exist for effecting crew changes.

AIRPORT: Situated 18 miles from the port.

TIME: GMT. No alterations during the year.

HOLIDAYS: New Year's Day (January 1st); Redemption Day (January 13th); Independence Day (March 6th); Good Friday; Holy Saturday; Easter Monday; Republic Day (July 1st); Christmas Day (December 25th); Boxing Day (December 26th). Cargo work can be arranged on those days on request.

SHORE LEAVE: Every member of the crew is free to go ashore at any time of the day or night after the Immigration Officer has issued shore passes to that effect after clearing inwards.

IDENTIFICATION CARDS: Shore passes issued are sufficient.

REGULATIONS: No unusual regulations for the port.

POLICE/AMBULANCE/FIRE: Telephone Nos: Police: 999 and 2936; Ambulance: 999; Fire: 999 and 2822.

DEVELOPMENTS: Provision of Container Depot.

Extensions to Quay No. 2. and construction of Quay No. 3. (These are under consideration).

GENERAL: Recommended to send ETA message at least 24 hours in advance. Essential that ETA message reaches Agent's office before 1430 hrs. Monday-Thursday or before 1000 hrs. Friday for weekends because of booking of gangs. Ships from Abidjan should also send 48 hours ETA message.

SHIPMASTER'S REPORT: (1976)

Good W/T. D.F. signals are obtained from Accra and Lome and with this vessel's equipment Marconi Type 758E will give a reliable position to within 2 miles. The 100 fathom contour line was accurate to within 1 mile where we crossed it. Within 20 miles the land definition is excellent on Radar. There is now an Oil Rig 137° 3.2 miles from the eastern end of the main breakwater. This is an excellent seamark and is well lit at night. Native fishing craft are met with from about 10 miles offshore and show lights when fishing at night but reliability regarding these lights is doubtful.

VHF contact with the port Signal Station is good, although there was very heavy traffic during our stay outside waiting to berth 5.5 days, but I was allowed to use the main transmitter when berthed to inform Owners that we were alongside, at anchor no restrictions are placed on vessels using their wireless transmitters.

The pilotage is efficient although the tug was late in attending us when berthing this caused no difficulty.

The entrance to the Harbour is good, plenty of water all about if you have to wait for the Pilot, which we did. (He was moving a fishing vessel, and we had to cruise for about twenty minutes, after having come to the entrance on instructions that he would board there).

There were never less than 18 ships waiting for berthing.

W/T. contact with Portishead was good.

SHIPMASTER'S REPORT: (1977)

From Southwards – a strong Easterly set experienced 24 hours prior to arrival and along the coast to Cape Palmas after departure.

Radar (in our case) of the land poor until 15 miles off when ships at anchor off the port gave the first and the best targets. Breaksea Point light good and sighted at full range.

Ship really needs to be on "standby" with engines ready on approach to the 100 fathom line, when the first of the many mainly unlit and poor radar target fisherman are encountered, and really are in dense packs all along the coast in the shallower waters. There is no point in adjusting speed for a daylight arrival, the earlier the better as port operates on a mainly first-come basis. Equally of little point to try and pick a selected anchorage, ships are to be found anchored over quite a wide area – avoid as per pilot book the "prohibited anchorage" and the 10 fathom rocky shoulder that runs parallel with the coast. There are invariably 12 ships or more at anchor even some large ships completely unlit and possibly unmanned.

The port as other Masters have reported is well run, Pilots, tugs etc., well trained and competent under normal conditions. The port is overbusy and accommodating and handling far more tonnage than ever designed for and commonplace to have ships double-berthed. Essential to be well moored and precautions taken against the scend and surge that enters the harbour under certain conditions.

Communication: W/T HF poor and ship unable to make direct radio contact with Ghana until well within M/F range.

VHF: All port signals are given on Channel 14, and VHF discipline on this frequency poor when local ships are at anchor or in the near vicinity. Liner Agencies reputedly keep watch on Channel 16, but we were unable to raise them or make any contact before berthing.

Stevedores: Worked well throughout, though some delay initially experienced whilst fork-lift trucks small enough to work in our hatches and under the coamings were obtained, some pallets having to be broken down in stow to be discharged. Hours of work – actual – this is without the ship being consulted in any way, but seemingly common practice throughout the port, were 0730 hrs. non-stop through to 1930 hrs. Some pilferage – mainly of split milk powder, no visible signs of any security control as such. Discharge rate overall (crane and ships gear) milk powder 13 tons per gang per hour; frozen meat 8.64 tons per gang hour.

Stevedores toilets: Essential that ship arrives with overside latrines bow and stern ready and rigged.

Noting Protest: It might well be wise to include need to note protest in arrival message. We berthed late Friday to find Consulate in Accra closed as from midday for the weekend.

Stores: The point cannot be over emphasised (and all ships must be given prior warning to pre-store accordingly) that ordinary every day stores are virtually non-available and the fresh provisions (vegetables, salads, eggs and even much of the fruit) that are available are highly priced.

Shore leave: Ship was warned by other ships, the Agents, Mission Staff etc. not to go ashore at all with muggings and robberies commonplace even in daylight (wrist watches prime targets). The Agency lays on a minibus seemingly as a matter of course, to run ships' staff to and fro. We in fact with use of the above bus and local taxis did not experience any problems and found local people friendly and hard working.

AUTHORITY: Ghana Ports Authority, Tema.

AGENT: Scanship (Ghana) Ltd., PO Box 64 Tema. Tel. 26.51 and 25.71. Cables "Scanship Tema". Telex 2181 Accra.

NOTES

Please also advise Shipping Guides Ltd.

Gibraltar

GIBRALTAR: 36.08 N. 05.22 W.

DOCUMENTS:
3 Crew Lists.
4 Passenger Lists.
Arrival Report, to be completed when receiving Pratique.
International Maritime Declaration of Health.
Ship's Register.
Load Line Certificate.
Deratisation Certificate.
Ship's Articles.
Certificate of insurance in respect of Civil Liability for Oil Pollution Damage.

PILOTAGE: Pilotage compulsory for all navigation (except direct *departure* from anchorage). Give notice of arrival through Agents 24 hours in advance furnishing maximum draft. Ships approach off Rosia Bay where Pilot (available day and night) boards vessel. Pilot boat painted black and flies international Pilot flag. To call Pilot: sound, and fly flag "G" or call Gibraltar Port on VHF Channel 16 and pass message on Channel 12.

ANCHORAGES: In open bay, good safe anchorage, depths vary from 5 to 40 fathoms. Vessels normally anchor in area West of Harbour Moles.

RESTRICTIONS: *Note:* British waters in the Bay of Gibraltar extend to the Median Line drawn in accordance with the 1958 Geneva Convention on the Territorial Sea and Contiguous Zone (see Admiralty Chart D 1448). However, part of those waters, lying North of 3 Qk. fl. buoys, are considered by the Spanish authorities to be within the limits of the Port of Algeciras/La Linea (Spanish Notice to Mariners 49/1563/67 of 9 December 1967), and the Spanish authorities have claimed Spanish port dues in respect of vessels anchoring between the Median Line and the line of buoys.

The waters in dispute form only a small part of the anchorages available to shipping calling at Gibraltar.

MAX. SIZE: If anchoring in bay, any size. Max. draft alongside, 31 ft. 6 in.

HEALTH: Vessels are usually boarded by Port Authorities off the Southern end of the detached Mole: if everything found satisfactory Pratique is granted immediately. Masters should advise Agents by radio before arrival of any illness on board so that Port Doctor may board vessel with Port Authorities.

RADIO: Gibraltar Radio, call sign ZDK.

VHF: Communicate with Port Authorities by VHF international calling Channel 16, pass message on Channel 12 (24 hour service).

TUGS: When required for berthing alongside, tugs meet vessels off Mole. Ship's ropes used.

BERTHING: Berths alongside are normally limited to 31 ft. 6 in. Deeper drafts may be accommodated for short durations of stay on a half-tide basis. Masters required to advise ship's draft when giving ETA. Cruise ships are only charged 25% of normal berthing charge.

Ships calling for bunkers and/or fresh water and not conducting operations involving passengers or cargo are only required to pay 12.5% of the normal berthing charges providing the stay alongside does not exceed 8 hours in addition to the bunkering/water period.

CARGO HANDLING: Container berth at No. 2 Jetty available for vessels up to 385 ft. in length, max. draft 28 ft. At other berths containers may be discharged by ship's equipment. 1 berth, for use by ships up to 28 ft. draft, has a fixed concrete stern landing ramp. Height of ramp above water level varies from 9 to 13 ft. according to tide. This is available for use in conjunction with ship's own stern ramp for roll-on/roll-off traffic.

Reclamation between No. 2 and 3 Jetties being carried out 1978/79 to provide space which will enable container handling to be expedited.

STEVEDORES: Agents automatically advise stevedoring company on receipt of ETA from ship.

MEDICAL: Masters should advise Agents when giving ETA if medical attention is required on board. Adequate hospital treatment available.

TANKERS: Max. draft at discharging berths 31 ft. Diameter of discharging lines 14 in. fuel oil, 10 in. diesel oil and gas oil.

DENSITY: 1025.

FRESH WATER: Available at Mole from pipe-lines, delivery rate 60/80 t.p.h. Water can also be delivered at anchorage from barge, delivery rate 40/50 t.p.h.

FUEL: Fuel available any time day or night. All grades available.

GANGWAY/DECK WATCHMAN: Not necessary.

OPENING/CLOSING HATCHES: Normally effected by stevedores.

CUSTOMS ALLOWANCES: No restriction whilst on board. Crew members may bring ashore small quantity for their immediate personal use.

IDENTIFICATION CARDS: Not required.

CONSULS:

Belgium	Tel. 3288	Netherlands	Tel. 5968
Denmark	,, 2151	Norway	,, 4352
France	,, 4830	Portugal	,, 5330
Greece	,, 2956	Sweden	,, 2151
Italy	,, 3053	Venezuela	,, 3509
Israel	,, 5955	Finland	,, 3113
Liberia	,, 4312		

REPAIRS: Deck and engine repairs possible. Underwater operations including repairs and cleaning of vessel's hull.

DRY DOCKS: 4 dry docks (Admiralty) available subject Naval requirements. Largest 871 ft.×125 ft., smallest 260 ft.×46 ft.

REPATRIATION: Facilities exist for repatriating Crew members.

AIRPORT: Daily regular flights to London. Distance to airport about half mile.

TIME: GMT plus 1 hour all the year round.

HOLIDAYS: New Year's Day; Good Friday; Easter Monday; Commonwealth Day (24th May); Spring Bank Holiday; Summer Bank Holiday; Queen's Birthday; Christmas Day; Boxing Day. Cargo work can be effected at overtime rates on these holidays except on Good Friday and Christmas Day when no cargo work is carried out. Bunkering is effected on any of these holidays without any extra charge except on Good Friday and Christmas Day when a surcharge is made.

POLICE/AMBULANCE/FIRE: Police and Ambulance 3434; Fire 2000.

TELEPHONES: Telephone can be placed onboard at cruise ship berth. Telephones can also be placed on vessels under repair at the Detached Mole, through Admiralty Telephone Exchange, cost about £10.

GENERAL: Advisable that vessels calling for bunkers and only stopping in port for few hours should radio their requirements prior to arrival to ensure avoiding delay.

AUTHORITY: Captain of the Port.

AGENT: Lambert Brothers (Gibraltar) Ltd., 47 Irish Place. Tel. address "Lambert-Gibraltar". Tel. 4373; Telex 72685 2222. Ship's Agents, Insurance Agents, Travel Agents 72685.

NOTES

Please also advise Shipping Guides Ltd.

Gilbert & Ellice Islands

FUNAFUTI: 08.31 S. 179.13 W.

DOCUMENTS:

Customs: Boarding of ships after radio pratique granted.
Clearance from the Last Port.
Crew List.
List of Passengers.
Stores' Lists.
Ship's Inward Report
List of Unmanifested Cargo.
Crews' Stores.
Manifest and Bill of Lading

Health: Radio pratique to be granted within 24 hours before arrival.
Vaccinations Against Cholera.
Vaccinations Against Smallpox (can be done).

Immigration:
Crew List.
Passenger List.
Next Port of Call.
Final Destination.
Passport.

PILOTAGE: No Pilots and no pilot boat. Local Master available on 1 month prior notice.

Chart: See Chart BA 2983. Fongafale Anchorage main anchorage.

RESTRICTIONS: None

MAX. SIZE: See "Te Puapua Passage". Max. Depth 15 m. 250 ft. wide at low water.

HEALTH: Radio pratique available.

RADIO: Funafuti Radio (ZJU) on 6204 kHz.

TUGS: None.

BERTHS: None.

CRANE: Manual 3 ton crane on jetty.

STEVEDORES: Available on 24 hours notice, discharge rate low.

MEDICAL: Hospital Radio advice available.

TANKERS: Must provide own discharge lines. No residue discharge facilities. Light diesel only available. No tanker berth.

DENSITY: Sea Water.

FRESH WATER: Max. 60,000 gallons in wet season, little or none in dry season, by tank on work boat.

FUEL: Light diesel only. Max. 5,000 gallons by drums (44 gallons).

FIRE PRECAUTIONS: No special precautions other than normal for tankers.

CONSULS: None.

REPAIRS: None.

SURVEYORS: None.

WATCHMEN: Not required.

HATCHES: By stevedores or crew.

CUSTOMS ALLOWANCE: 200 cigarettes and 1 bottle of spirit.

REPATRIATION: Air service to Fiji and Tarawa.

AIRPORT: 0.25 mile from jetty, fortnightly service. Special charters by arrangement.

TIME: GMT plus 12 hours.

HOLIDAYS: New Year (1st January); Public Holiday (3rd January); Good Friday (8th April); Easter Friday (9th April); Easter Monday (11th April); Queen's Birthday (11th June); Public Holiday (13th June); Bank Holiday (1st August); Tuvalu Day (1st October); Public Holiday (3rd October); Prince of Wales Birthday (31st October); Christmas Day (25th December); Boxing Day (26th December); Public Holiday (27th December).

POLICE/AMBULANCE/FIRE: No telephone. By messenger.

TELEPHONE: None.

SERVICES: None.

SHORE LEAVE: Allowed after clearance.

IDENTIFICATION CARDS: Not required.

REGULATION: No sullage, ballast, tank residue, etc., to be discharged in lagoon.

DELAYS: Unpredictable, depending on whether other ships in port.

DEVELOPMENTS: Plans to construct a new deep sea wharf is under consideration but largely dependent on the availability of grant in aid funds.

AUTHORITY: No independent Port Authority. All enquiries should be made to *Ministry of Home Affairs.*

TARAWA: 01.21 N. 172.55 E.

Tarawa is the main port of entry for the Gilbert & Ellice Islands Colony. Other entry ports are Ocean Island, Christmas Island, and Funafuti.

The Atoll is roughly triangular in shape, being 19 miles in length North and South and 16 miles broad along the southern side. A number of islets, separated by shallow passages, dry at low water, from the southern and eastern sides of the Atoll.

Causeways link up the islets along the southern sides and part of the eastern side. On the western side there is a barrier reef, most of which is sunken, enclosing a large lagoon navigable by vessels drawing 26 ft. at LWOST and 30 ft. at HW.

The Governor and Main Government Offices are at Bairiki Islet which is connected by causeway to the Colony Central Hospital and Government Schools at Bikenibeu.

PILOTAGE: Not compulsory, but advisable as sometimes especially after strong winds, some of the navigation marks may be out of position.

APPROACHES: The ship passage into the lagoon is 3.25 north of Betio and is usually well marked by buoys, as depicted on chart B.A. 3269. An occulting white light with a range of 8 miles, exhibited from a 105 ft. tower at the western end of Betio Islet marks the southwestern corner of the Atoll.

ANCHORAGE: Inside the lagoon, safe in all weather although in strong winds it may not be possible to work craft in the lagoon.

RESTRICTIONS: At present navigation and pilotage of the lagoon is restricted to daylight and vessels arriving at night should stand off the southwest of Betio light. A vessel approaching in daylight and having to wait for high tide or other reasons may anchor anywhere on the western reef in 8–10 fathoms. Bottom, coral and sand.

RADIO: Tarawa Marine Radio maintains continuous watch on 500 k/cs., 2182 and 6204 k/cs.

TUGS: Available.

CARGO HANDLING FACILITIES: Tugs and lighters capable of working cargo up to 29 t.p.h. A 20-ton crane on Betio Wharf is capable of working containers from the lighters.

MEDICAL: Attendance can be obtained.

FRESH WATER: Available in limited quantities in an emergency.

FUEL: Stocks of light diesel fuel, petrol and kerosene available.

REPAIRS: Boat repairs and most minor ship repairs can be undertaken at Betio, where the Development Authority employs engineers, electricians, boilermaker and a shipwright. Radio and Radar repairs can be undertaken by the Posts and Telegraph Department. Aqualung and skin divers available.

AIRPORT: Bonriki International Airport.

AUTHORITY: Gilbert & Ellice Islands Development Authority.

NOTES

Please also advise Shipping Guides Ltd.

Greece

AGHIOS NIKOLAOS (St. Nikolo-St. Nicholas), Crete: 35.12 N. 25.43 E.

DOCUMENTS:
4 Crew Lists.
2 Passenger Lists.
1 Cargo Manifest.
1 Spares List.
1 Stores List.
1 List Crew Personal Effects.
Maritime Health Declaration.
1 Provisions List.

PILOTAGE: Not compulsory. No Pilot station. Private Pilot who can be used if needed. However, not always available. Area of Pilot's boarding is N.E. or S.E. of Aghioi Pandes Islet, depending weather conditions. Anchorage waiting place in same area. Call Pilot with signal "G". Small fishing vessels (length 13.0 m.) fitted with VHF can indicate position of anchorage if advised by Agent.

ANCHORAGE: (a) Harbour of St. Nikolaos, depth 3 – 5 fathoms. (b) Usual anchorage for vessels over 500 tons gross, S or SE of Nikolo Islet (Admiralty Chart No. 2536 B) and at a distance of 0.5 – 1.0 m. from the mainland, depth 10 – 40 fathoms respectively. (c) Poros Bay for small and large vessels, only when N and NW fresh gales, depth 16 – 27 fathoms.

RESTRICTIONS: Care to be taken off North entrance to port owing to rocky shoals, depth 5 m. Entrance from the S.W. is free of obstructions.

MAX. SIZE: Vessels of up to 100 m. length and 9.0 m. draft can enter the port. At oil bunkering installation outside the port, vessels of any size can be accommodated.

HEALTH: If from another Greek port free pratique is automatic and access to and from vessel granted on permission of Port Authorities. Port doctor visits all other vessels.

RADIO: No local radio station. Cables to Agent or Port Authority through "Athinai Radio", "Heraklion Radio" or Rhodes Radio".

TUGS: None.

BERTHING: Berthing position designated by Port Authority.

STEVEDORES: 10 permanent port stevedores available, but further 5 men can be engaged. Cargo worked by vessel's own gear.

MEDICAL: No advance notice of medical attendance required. Medical attention by town doctors available. Government hospital with all facilities.

TANKERS: No tanker berths. Vessels moor to buoys. Oil line 6 in. diameter.

DENSITY: 1025.

FRESH WATER: At new pier 3 hydrants, hose dia. 25 ins. for supplying water. At the bunkering installation at Katsini Bay there is water storage tank capacity 500 cu. m. for supply to deep-sea vessels. Loading rate about 49 t.p.h. Delivery by flexible hose connection from the mooring buoys. Fresh water not available at the present time at the bunkering installation as they have ceased operating.

FUEL: Unlimited supply of bunker fuel but from 1974 the bunkering installations have ceased operating due to the tourist area. Operations are to be moved to another part of Crete.

Small quantities transported by tank truck are available from the pier.

DEVELOPMENTS: During next 5 years *(a)* deepening of Port Basin, *(b)* Provision of 1 shore crane, *(c)* construction of breakwater — length 200 m.

HATCHES: Opened/closed by stevedores.

CUSTOMS ALLOWANCES: 2 packets cigarettes per crew member per day.

CARGO GEAR: No shore facilities. All cargo worked with ship's own gear.

CONSULS: None.

REPAIRS: Only minor repairs.

REPATRIATION: Crew replacement and repatriation available.

AIRPORT: At Iraklion distance 66 km. 2 or 3 flights per day to Athens.

TIME: GMT plus 2 hours, permanent.

HOLIDAYS: In addition to standard Greek holidays, local holidays are Ascension Day (date not fixed), and St. Nicholas Day (6th December).

POLICE/AMBULANCE/FIRE: St. Nicholas Police tel. 100. State Hospital, 22369. Fire — none. Port Police 22312. Area code for St. Nicholas 0841.

TELEPHONES: None.

SERVICES: Tank cleaning and hold cleaning.

SHORE LEAVE: Permitted with Port Authority pass.

REGULATIONS: *(A)* Vessels are not allowed to approach Aghioi Pandes (goat reserve). *(b)* No refuse or other waste matter of any description allowed to be thrown overboard from vessel. *(c)* No visitors permitted without Port Authority permission.

AUTHORITY: Port Authority of Aghios Nikolaos.

AGIOI THEODOROI: 37.55 N. 23.05 E.

DOCUMENTS:
7 copies Crew Lists (European and Asian).
2 copies Dates of Vaccinations/Inoculations.
1 copy Cargo Manifest.
2 copies List of Provisions and Stores (these are supplied on forms issued by Agent printed in Greek/English).
2 copies Officers'/Crews' personal declaration, on forms supplied by Agent in Greek/English, covering all high duty items, radios cameras, etc.
1 copy declaration of ships' cash on board, form supplied by Agent in Greek but made out in front of Master.
2 copies of Masters' declaration that all high duty goods have not been put under seal, and that he is responsible for any loss or landing of same without proper authority.
All passports and/or Seamen's books to be produced *if* requested by Immigration.

On completion of loading, documentation takes about 2 hours.

PILOTAGE: Compulsory. Pilot boards S.S.E. of port, about 1 mile off the outer jetty. No pilot boat as such; uses either a tug or mooring boat. Pilot is arranged by Agents who are based in Piraeus (1 hour by car). No means of radio contact between vessel and Pilot station.

ANCHORAGE: A reasonably safe anchorage can be obtained in position 0.5 mile off the outer jetty in a depth of 20 to 25 fathoms with a sandy bottom.

TUGS: 2 tugs used for berthing, and 1 on sailing.

BERTHS: There are 3 main berths with 2 smaller berths for coastal vessels. The largest and outermost berth can accommodate vessels of 250,000 tons fully loaded, a max. discharge/loading rate at this berth being 5,000 t.p.h. The other berths can accommodate vessels of up to 50,000 tons fully loaded with a max. discharge/loading rate of 3,000 t.p.h. All berths are equipped with four 10 in. Chicksans. They are situated in an open position for winds from the South and West but provided ample moorings are put out, there should be no cause for concern.

Vessels can berth at any time day or night.

MOORINGS: Standard moorings on to dolphins which are well fended and hold the vessel about 4 feet clear of the manifold complex. Vessels require their gangway but no derricks are required. 1 or 2 anchors are used depending on the berth used.

FRESH WATER: Fresh water for other than drinking purposes is available from the jetty, but drinking water has to come by barge from Piraeus for which 2 days' notice is required.

FUEL: Bunkers can be obtained from one of the coastal tankers based here, capacity approx. 5,000 tons.

CUSTOMS: Bonded locker is sealed. Allowance 200 cigarettes or equivalent in tobacco or cigars per man (7 days) and a part bottle of wine and spirits is permitted per man (7 days). All Tobacco/cigars/cigarettes placed under seal. Crew excess must be declared on provision list in separate column for same.

SHORE LEAVE: Shore leave is allowed, passes being issued on arrival which must be handed in prior to sailing.

REPAIRS: No facilities. Nearest port for repairs is Piraeus.

ALEXANDROUPOULIS: 40.51 N. 25.54 E.

DOCUMENTS:
Port Authority:
2 Crew Lists.
1 Passenger List (if any).

If from abroad Maritime Declaration of Health. If Greek flag, articles and log book, and declaration of foreign exchange.

Customs:
3 Lists of Stores and Provisions.
1 Crew List.

Master's personal declaration that all stores not held in bond will remain on board.

PILOTAGE: No pilot service. If Master requires pilotage assistance an experienced local boatman is available, but Agent must be advised of ETA in advance order to arrange for this Pilot to await vessel about 1 mile outside port.

ANCHORAGES: Depth inside port 18 ft. 06 in., mud bottom. Depth increases outside port to about 10 m. at distance of 1 nautioal mile.

Area around port subject to strong S.E./S. winds especially during Winter. During strong winds vessels can seek shelter off Samothraki Island. In strong winds port is considered safe but because of occasional large waves loading is stopped. Winds from other directions do not affect port work.

MAX. SIZE: Vessels with draft not exceeding 18 ft. 06 in. can enter safely.

HEALTH: Vessels from foreign countries can enter harbour and obtain free pratique during the period from sunrise until 2200 hrs. Vessels having suspected contagious disease on board should remain outside harbour until visit of medical officer, and await further instructions.

TUGS: None.

BERTHING: At least 24 hours notice of ETA to be passed to Agent in order to obtain allocation of berth from Port Authority.

STEVEDORES: Prior notice to be passed to Agent order arrange gangs. Rate of cargo working: General cargo about 100 tons per gang every 8 hours. Bagged cargo about 100 tons per gang every 8 hours. Coal about 80 tons per gang every 8 hours. Timber about 120 cu.m. per gang every 8 hours. Vessels must use own gear for loading/discharging.

MEDICAL: No advance notice required. 1 Government General Hospital, 3 clinics. Doctors' services readily available.

TANKERS: There is a floating pipe-line. Tankers with a draft of 17 ft. can discharge diesel oil only.

FRESH WATER: Hydrants on West side of breakwater. Delivery rate about 5 t.p.h. (each), but delivery rate reduced when 2 or more hydrants in use.

FUEL: No bunker C fuel available. Supplies of diesel oil possible from road tankers.
FIRE PRECAUTIONS: No port fire brigade. In emergency fire brigades must be called from Alexandroupolis.
DEVELOPMENTS:
(a) The Main Pier is finished, total length 450 m.
(b) The pier East of Main Pier is finished, total length 231 m.
(c) The Western Breakwater has recently been finished. It has been extended for 108 m. Work on extending the breakwater for a further 97 m. has already begun.
WATCHMEN: Not available, and if required must be supplied by vessel.
HATCHES: Opened and closed by crew.
CUSTOMS ALLOWANCES: 1 packet of cigarettes allowed out of bond for each crew member, for each day in port. Wine/beer no restrictions. Spirits, Master allowed one bottle.
CARGO GEAR: Load/discharge by ship's own gear.
IDENTIFICATION CARDS: Shore pass issued against crew list and seamen's book. Passes obtainable from Port Authorities.
CONSUL: Consul-Agent of France. Tel. 26-720.
REPAIRS: Only minor repairs available.
REPATRIATION: Facilities for crew changes and repatriation.
AIRPORT: 5 km. distant. Daily flights to Athens. Flights to Thessaloniki Tuesday, Thursday and Saturday.
TIME: GMT plus 2 hours. Summertime GMT plus 3 hours.
HOLIDAYS: 1st January; 6th January; Whit Monday; 25th March; Good Friday; Easter Monday; 1st May; 14th May (local); 15th August; 28th October; 6th December; 25th December; 26th December, and all Sundays. Cargo work can be arranged on these days, subject to payment of additional charges.
POLICE/AMBULANCE/FIRE: Police station. Tel. 26352; Security Police, 26220; Ambulance 25272; Fire 26222.
TELEPHONES: No facilities for telephones on board.
SHORE LEAVE: Permitted.
AUTHORITY: Port Authority of Alexandroupolis.

ARGOSTOLI, Cephalonia: 38.12 N. 20.29 E.

DOCUMENTS:
3 Crew Lists.
3 Passenger Lists.
Customs Clearance.
2 Cargo Manifests.
Bills of Lading (copy)
4 Ship's Stores List.
4 Lists of Crew's Personal Effects.
Ship's Papers.
Crew Vaccination List.
PILOTAGE: No Pilot station.
ANCHORAGE: Vessels anchor in roads 0.5 miles N.N.W. from Entrance light. Max. channel draft 19 ft.
MAX. SIZE: Up to 19 ft. draft.
HEALTH: Free pratique given by Port Health doctor.
RADIO: Patras Radio. No VHF.
TUGS: None available.
MEDICAL: Advance notice not required except in urgent cases. For vessels arriving from foreign countries crew require vaccination certificates.
TANKERS: Small tankers discharge at DEH Power Terminal.
FRESH WATER: Can be supplied from the pier using ship's hoses.
FUEL: Small quantities available, but only for yachts.
OPENING/CLOSING HATCHES: Performed by ship's crew.
CUSTOMS ALLOWANCE: 50 cigarettes allowed for each crew member.
CONSULS: No local representation.
REPAIRS: Only minor machinery repairs can be carried out.
REPATRIATION: By air to Athens (once daily) or by ferry-boat.
TIME: GMT plus 2 hours, Summertime may be kept.
HOLIDAYS: Local holidays are 21st May, 16th August and 20th October, in addition to national holidays. Work may be arranged at double rates.
POLICE/FIRE/AMBULANCE: Police tel. 22200; Ambulance 22515; Fire service available.
TELEPHONES: Can be connected on board vessels without charge.
SHORE LEAVE: Allowed.
AUTHORITY: Cephalonia Harbour Office.

CHALKIS: 38.27 N. 23.36 E.

DOCUMENTS:
2 Crew Lists.
2 Passenger Lists.
2 Cargo Manifests.
2 Stores and Spares Lists.
2 Crew Personal Effects Lists.
Health Certificate.
PILOTAGE: Pilotage is compulsory.

Application for Pilot to be made by radio through Agent to Chalkis Port Authority. ETA required at least 8 hours before arrival.

Apply for Pilot through VHF Channel 12, or through radio/telephone on 2364 kc/s calling Harbour Master, Chalkis.

Pilot boards from black motor-boat with white horizontal stripes, about 10 m. length, in a position about 1-1.5 miles North of the light buoys of the Northern Port.

The pilotage area extends from 1 mile North of red and green light buoys, North of Evripos Bridge, and to the South of Euboea, 2.5 miles from Bourtzi Point.

The anchorage for vessels coming from the North of Euboea and awaiting Pilot is at the centre of the Euboean coast off Lighthouse Kakokefali, North of the 2 light buoys and outside the bearing 020/200° which is the axis of vessels passing in and out of Evripos Strait.

Safe anchorage for vessels coming from South of Euboea and awaiting Pilot is 1 nautical mile South of Bourtzi Point.
ANCHORAGES: *(a)* In the basin of South Port clear of vessels passing in the Straits. Depths over 21 ft.
(b) In North Port between the light buoys and Kakokefalis lighthouse and outside the axis of course 020/200°. In depths of 10–15 fathoms.
(c) Anchorage mentioned in "Pilotage" above, depths of 10 fathoms.
RESTRICTIONS: Entry restricted only by depth. Max. draft 21 ft. For vessels intending to pass Evripos Strait having draft 19 ft., passage possible only at slack tide or with following tide. Full details in Evripos Straits Operations Regulations.

There is also a restriction in Steno Straits where there is an overhead cable 38 m. above sea-level.
MAX. SIZE: Max. draft 21 ft. in daytime and 19 ft. at night for vessels entering port. For vessels navigating Evripos Strait max. length 110 m., max. draft 19 ft., breadth 20 m. and subject to local regulations.
HEALTH: Pratique not required if coming from another Greek port. Otherwise international pratique regulations are applied.
RADIO: No local radio, all messages should be passed through Athinai Radio.
TUGS: 1 tug available, joins vessel off the berth. Ship's tow lines used. Tug is compulsory for vessels over 1,000 g.r.t. Tug used only for berthing and unberthing.
BERTHING: Berthing in both the North Port and the South Port can only be effected at slack water subject to available tide.
BRIDGES: Passage above Evripos Bridge can only be effected at slack water or with following tide.
STEVEDORES: Loading, discharging, carried out with ships gear. Notice must be given by Agent to stevedores not less than 6 hours before vessel's arrival.

Cargo working rates: General cargo 80–100 tons every 8 hours. Bagged cargo 100–150 tons every 8 hours. Timber 70 cu. m.–90 cu. m. every 8 hours.
MEDICAL: Agent should be advised beforehand if medical assistance required on arrival. Clinic facilities available. Vaccination certificates required.
DENSITY: Average 1025.
FRESH WATER: Drinking water can only be supplied in small quantities by tanker lorry.
FUEL: Can be supplied in small quantities by tanker lorry.
DEVELOPMENT: A pier 240 m. is under construction at Vourkos in the South Port; depth alongside 26 ft.
WATCHMEN: Not required.
HATCHES: Opening and closing hatches can be effected by ships crew or by workers if requested.
CUSTOMS ALLOWANCES: Crew members each allowed 1 packet of cigarettes per day. Only the master is allowed 1 or 2 bottles of alcohol while vessel in port.
IDENTIFICATION CARDS: Shore passes are issued by port authorities.
CONSUL: France, tel. 2574.
REPAIRS: Only minor repairs can be effected by technicians from Piraeus.
REPATRIATION: No difficulties as there are excellent communications with Piraeus.
AIRPORT: Nearest is Athens International Airport.
TIME: GMT plus 2 hours all the year round.
HOLIDAYS: 1st January; 6th January; 25th March; 21st April; Good Friday; Easter Monday; Easter Sunday; 21st May; 15th August; 28th October; 6th December; 25th and 26th December. Local holiday 26th July.
POLICE/FIRE/AMBULANCE: Port police, tel. 22580; Fire 23333; Ambulance 22282.
TELEPHONES: Cannot be connected on board.
SHORE LEAVE: Allowed.
DELAYS: Only waiting for suitable tides.
AUTHORITY: Chalkis Port Authority.

CORFU (Kerkyra): 39.37 N. 19.56 E.
(Including Kalifoka and Kefalomandouko)

DOCUMENTS:
3 Crew Lists.
3 Passenger Lists.
Maritime Declaration of Health.
3 Stores Lists.
3 Spares Lists.
PILOTAGE: At least 24 hours before arrival ETA should be passed to Port Authority on 2182 kc/s, answering on 2830 kc/s. Vessels requiring Pilot during daytime should hoist letter "G" of international code, and sound letter "G" in the morse code on ships whistle at intervals. Whistle signal may also be used at night. Vessels should await Pilot in position 39° 38′ N., 19° 57′ E. nearest to the coast of Ptychia Island (Vido) and Corfu, depending on weather conditions.
ANCHORAGE: Safe anchorages in the area between Ptychia Island

and coasts of Corfu, depth about 30 m. During strong N.W. winds there is safe anchorage in the roadstead at Goritsa Bay or at Kastrades at a distance of half mile from the shore where depth in excess of 20 m.
RESTRICTIONS: Only during unfavourable weather conditions or lack of berthing space.
MAX. SIZE: Draft 7.5 m.
HEALTH: Port Health Officer boards vessel on arrival and examines health declaration. In cases of suspected disease or fever on board the health officer will examine entire crew and passengers.
RADIO: Radio Kerkyra. 2182 and 2830 kc/s.
TUGS: None.
BERTHING: Vessels should prepare fenders prior going alongside berth.
STEVEDORES: At least 24 hours advance notice of ETA required order arrange gangs. There are 3 silos for the discharge of bulk grain at Kalifoka (Mandoukion). Discharge rate about 60 t.p.h.
MEDICAL: Agent should be advised in advance of any medical requirements. Medical clinics available.
DENSITY: 1025. Max. height of tide 0.6 m.
FRESH WATER: Available through 2 in. hoses. Cost 25 drachmas per ton (approx.).
FUEL: For yachts in the new harbour there is a diesel-oil tank, capacity 10 tons. Also available from road tanker for all vessels alongside. At Kefalomandouko there is a permanently anchored oil barge capacity 24 tons. There are plans to provide permanent shore facilities.
FIRE PRECAUTIONS: Loading/discharging of inflammable liquids and explosives generally forbidden at night. The anchorage for vessels carrying inflammable liquids or explosives is between Lazaretos Islet and N.W. of breakwater point.
WATCHMEN: Not required.
HATCHES: Opened and closed by stevedores. Hold cleaning service available.
CUSTOMS ALLOWANCES: Crew of Greek vessels are not allowed more than immediate requirements out of bond. Seamen signing off and passengers leaving the vessel are allowed 200 cigarettes.
IDENTIFICATION CARDS: Required.
CONSULS:

France: Botis George, 1, Romanou St. Tel. 30067.
W. Germany: Aspiotis Gerasimos, Isermeti St. Tel. 31755.
Denmark: Damaskinou, 33 A.G. Spiridonos St. Tel. 29481.
Italy: Pitsino Juzepina, 10 Alexandras Avenue. Tel. 22351.
Netherlands: Aris Bogdanos, Skondrou-Pyrgi-Ypsos. Tel. 23870–29642.
U. Kingdom: Tsatsopoulou-Brouks, 1 Zambeai St. Tel. 30055.
Spain: Spiridon Pogiagos, Eygeniou Voulgareos St. Tel. 29969.
Norway: K. Kondis, 5 Donzelot St. Tel. 32423.
Belgium: Arsenios Androutselis, 11 Kapodistriou St. Tel. 29988.
Brazil: K. Palatianos, 124 Kapodistriou St. Tel. 30767.
Sweden: Adam Bogdanos, 5 Donzelot St. Tel. 29469.

REPAIRS: Facilities for minor repairs only.
DRY DOCK: Largest dry dock 20 m. length 2 m. depth.
REPATRIATION: Facilities for crew changes and repatriation available.
AIRPORT: 2 km. from port. During winter 1 flight daily to Athens. During summer frequent daily flights to Athens.
TIME: GMT plus 2 hours permanent.
HOLIDAYS: Local holidays are 21st May, 11th August and 12th December. In addition Corfu observes standard Greek holidays.
POLICE/AMBULANCE/FIRE: Police, tel. 23661; Ambulance, tel. 30062; Fire, tel. 29255.
TELEPHONES: No facilities for placing on board.
GENERAL: Prevailing wind is from the N.W. Anchorage in the new harbour unsatisfactory due to mud bottom.
SHORE LEAVE: Allowed.
REGULATIONS: Forbidden to approach Lazaretos Islet.
AUTHORITY: Port Authority of Corfu.

ELEUSIS (including Skaramanga): 38.02 N. 23.33 E.

DOCUMENTS:

4 Crew Lists.
4 Passenger Lists.
Bill of Lading.
2 Lists of Stores and Provisions.

PILOTAGE: Piraeus Pilct station regulations are operative.
ANCHORAGE: Port offers safe anchorage. Bottom mud and sand.
RESTRICTIONS: After sunset and for vessels intending to enter Eleusis port through Salamis channel, it is imperative to give 6 hours notice of expected time of arrival to Port Authorities of Eleusis, in order to obtain special permission from the naval yard of Salamis.
MAX. SIZE: No limitations to length and breadth at the installations or at the main port. Max. permissible draft of vessel entering Eleusis Bay is 35 ft. Max. draft at berths is 33 ft. Also see "Tankers".
HEALTH: For vessels arriving from other Greek ports, pratique is automatic. Vessels arriving from foreign ports boarded by Health Officer who grants free pratique.
RADIO: Athinai, 2182 kc/s.
TUGS: Join vessel outside Piraeus Harbour and formalities much same as Piraeus.
BERTHING: Overall length of jetties and quay at Eleusis 715 m. Max. depth over 80 m. of jetty length is 33 ft. with depths of 26 ft. elsewhere.
SPECIALISED CARGO HANDLING: Loading/discharging of iron ore is carried out by *(a)* Holivourgiki Co., which owns a pier of 180 m. long and from 26 ft. to 36 ft. depth, equipped with 4 cranes, and *(b)* by Metallia Voxitou Elefsinos Co., which offer a special anchorage with buoys. Loading is effected by means of silo.

Loading/discharging of fluid chemicals or liquid gas are carried out by Petrogas Co. to their private pier of 35 m. long and 15 ft. depth.
MEDICAL: Advance notice not required. Clinic available in town of Eleusis if required.
TANKERS: Operating companies supply reducing pieces. No facilities for residue discharge. *(a)* Esso Pappas: length 160 m.; breadth 30 m.; depth at pier 30 ft. *(b)* Greek refineries: length 93 m.; breadth 12.70 m.; depth 7 m. *(c)* Texaco: length 80 m.; breadth 6 m.; draft 4.50 m. *(d)* Mamidakis: length 40 m.; breadth 5 m.; draft 27 ft.
FRESH WATER: Barge delivery available.
FUEL: Available ex-wharf at tanker installations subject advance notice. Can be supplied by barge at other locations.
FIRE PRECAUTIONS: The usual precautions applicable to oil installations. During operations of white liquid (petrol, spirits, etc.) regulations require a tug to be standing by.
HATCHES: Usually opened and closed by crew and subject additional payment by stevedores.
DEVELOPMENTS: Hellenic shipyards, Skaramanga, plans to build a new graving dock for 300,000 d.w.t.

Eleusis Shipyards have built a third floating dock which takes vessels up to 115,000 d.w.t. At the building dock, a crane of 400 tons lifting capacity has been constructed.
CUSTOMS ALLOWANCE: 200 cigarettes and 1 bottle wine/spirits allowed per Crew member out of bond.
CONSULS: None.
REPAIRS: All grades of repairs can be carried out at Eleusis shipyard, and also at Skaramanga (see "Dry Docks").
DRY DOCKS: Skaramanga shipyard situated on the coast between the Port of Piraeus and Eleusis Bay. Shipyard is 8 miles by road from Athens and 7 miles from Piraeus; driving time 25 and 20 minutes respectively.

Mailing address: Hellenic Shipyards Co., PO Box, 480, Athens, Greece. Cables: Shipyard, Athens. Telex: 215293 HSYS GR, 215396 HSYS GR, 215567 HSYS GR. Telephones 8073.471, 8073.351, 8073.610. Office hours at Skaramanga: 0815 hrs. to 1715 hrs. (weekdays), 0815 hrs. to 1345 hrs. (Saturdays).

Floating Docks

Main Particulars	*Dock No. 1*	*Dock No. 2*	*Dock No. 3*
Lifting capacity	30,000 tons	22,000 tons	25,500 tons
Docking capacity (d.w.t.)	72,000 ,,	37,000 ,,	60,000 ,,
Length overall	826 ft.	673 ft.	760 ft.
Length on keel blocks	760 ,,	605 ,,	693 ,,
Breadth inside banks	121 ,,	105 ,,	111 ,,
Breadth outside banks	147 ,,	129 ,,	136 ,,
Ht. of WL above keel blocks	28 ,,	28 ,,	28 ,,
Pumping time	120 min.	80 min.	100 min.

Skaramanga Yard's three floating docks have been designed in such a way as to eliminate delays of any kind in the raising of large vessels and to ensure that the work is carried out in minimum time and with the least possible inconvenience to the crew living on board.

The basic equipment of the docks is the following; Two 5-ton cranes, 2 fire extinguishing pumps 120 cu.m. per hour at 90 m. WC, DC current supply to ships 1200 A 220 V, AC current supply to ships 600 A 440 V 60 cycles, multipoint welding rectifier 2500 A, 2 oil pumps for supply of fuel oil from the dock to the vessel 60 cu.m. per hour at 50 m., 2 compressors 17 cu.m. per minute at 7 atu, emergency diesel generator set 200 KVA, foam fire extinguishing system, steam boiler and water distilling plants.

Shipmaster's Report: 1978.

Tankers may discharge residue at the deballasting station of Hellenic Shipyards, max. output 500 cu.m./hour.

Graving Dock

The Graving Dock is 327 m. (1,100 ft.) long, 53.6 m. (176 ft.) wide and 9.25 m. (30 ft.) deep at the entrance. It can take ships in the 240,000 ton range.

Ships are manoeuvred at the dock entrance with the assistance of two 5-ton capstans situated on each side of the entrance gate. They are then shifted inside the docks by two 15-ton auto-tensioning winches and hauling-in trolleys (mules) running on tracks on each side along the dock subway.

The dock floor is fitted with specially designed keel blocks for easy fitting and removal and with electrically, operated side blocks.

The Graving Dock is served by two 100-ton cranes, one 50-ton crane and a small 5-ton crane.

A fleet of 5 powerful tugs is on hand at Skaramanga Yard to assist docking and undocking operations of all vessels calling at the yard.

Eleusis Shipyards S.A. is located 27 km. outside Athens. The site was chosen on account of the several advantages it presents. The bay is well protected from strong winds, sources of raw materials are available in the vicinity of the ward, and adequate transportation, power, and telecommunication facilities can service the needs of yard.

Athens Office: 67 Athinas Street, Athens 112. Tel. 349 053. Cables "Helnafel Athinia". Telex 215215 ESC GR.

Yard: Eleusinia, Eleusis. Tel. 55351. Cables "Helfafel Eleusis". Telex 215684 YARD GR and 215690 YARD DR.

Floating Docks: Two floating docks are available with the following specifications:

	No. 1	*No. 2*	*No. 3*
Length	162 m.	227.5 m.	252 m.
Breadth at entrance	23 m.	33 m.	41 m.
Draft over keel blocks	6.30 m.	8 m.	9.40 m.
Lifting capacity	11,500 m. tons	20,000 m. tons	30,000 m. tons
Cranage	5 t at 15 m.	12 t at 20.6 m.	12 t at 20 m.

Quay Wall; The 640 m. long quay wall is equipped with 40 and 15 ton cranes; range 30 m. power 220 volts DC 100 amp. – 42 volts DC 25 amp. – 280 volts AC 630 amp. Floating crane, 50 tons capacity.

Tugs: Available for manoeuvring purposes at all times.

AIRPORT: Athens Airport. Regular international flights.

HOLIDAYS: Cargo operations can be effected during usual Greek holidays, following submission of application to Harbour Workers' Union and subject cost increase of 75% above normal.

POLICE/AMBULANCE/FIRE: Eleusis Police Station 46674; Ambulance 46503; Fire Brigade 0199.

SPECIAL PRECAUTIONS: See "Piraeus".

AUTHORITY: Eleusis Port Authority.

IRAKLION (Heraklion), Crete: 35.20 N. 25.10 E. (See Plan Book)

DOCUMENTS:

4 Cargo Manifests.
4 Crew Lists.
4 Passenger Lists.
Declaration of Crew's Personal Effects.
List of Stores and Provisions.
Maritime Declaration of Health.
Vaccination Certificates.

PILOTAGE: Pilotage area extends 0.5 to 1 mile N.E. of breakwater. Advance notice of ETA should be passed to Agents order arrange Pilot. Contact may be made with Pilot station on VHF Channel 12 during daylight, also when within distance of 3–12 miles, and subject prior agreement of calling time, communication can be effected by radio-telephone via Radio Iraklion – Pilot station telephone 286133. International pilotage signals apply. Pilot boat is wooden boat 12 m. length, hull colour black, with white deckhouse, carrying black board with word "Pilot" in white letters. In bad weather vessels should proceed close to entrance of port for Pilots boarding.

A cement pillar has been installed on the end of the extension of the N. breakwater. Fl. Gr. every 3 seconds, visible 9 miles. The pilot boat is equipped with VHF. range 50 miles.

ANCHORAGE: Anchorage East of port entrance is forbidden owing to numerous underwater cables. In good weather conditions anchorage to be found 0.75 mile Northwards of N. breakwater with Enetic Castle bearing 180°. In bad weather conditions, best anchorage is at a distance of about 5 nautical miles to the W. of the North breakwater and at a distance of 3 miles from the coast (Ellinoperamaton Haven); depth of water requires a big scope of anchor chain.

MAX. SIZE: Max. length 250 m., draft 29 ft.–29ft. 6 in. Usual rise and fall of tide 1 ft. but increasing with South winds and decreasing with North winds.

HEALTH: International regulations apply for obtaining free pratique. In the event of suspected disease vessel will remain under quarantine until cleared. Pratique is automatic if arriving from another Greek port.

RADIO: Radio Iraklion – SUH 2128 kc/s.

TUGS: Port authority has 1 tug of 1,000 h.p. and periodically (during the tourist season), 1 tug of 650 h.p. When tugs required they await vessel at port entrance. Ship's lines used.

BERTHING: Pilot will advise Master of berthing position.

STEVEDORES: Port authority owns 3 cranes but they are seldom used. Cargo operations usually conducted by use of ship's own gear. Discharge rates per gang in 8 hours: bulk cargo 100 tons, bagged cargo 140 tons, liquid cargo subject ship's equipment – transportation by barges, timber 100 cu. m.

MEDICAL: Advance notice should be passed to Agents if requiring medical attention. Clinics and medical treatment available.

TANKERS: Only very small tankers discharge in Iraklion Port and Ellinoperamaton Haven. At Iraklion, tankers discharging liquid fuel are required to berth at East breakwater (fuel pier). Attendance of fire brigade and 1 tug standing by is compulsory.

DENSITY: 1020.

FRESH WATER: Available ex-berth or ex-barge. Rate of delivery ex-berth about 500 tons per 24 hours.

HATCHES: Opened and closed by crew.

CUSTOMS: 2 packets of cigarettes per day per crew member allowed out of bond, and one 500 gr. bottle wine/spirits for whole time of vessel's stay in port.

IDENTIFICATION CARDS: Shore passes issued by Port Authorities.

CONSULS:

Finland	tel. 284860 and 283860
Norway	tel. 282667
Netherlands	tel. 282615
Belgium	tel. 282520 and 282296
Sweden	tel. 282476 and 285859
Denmark	tel. 282253
France	tel. 282347
Germany	tel. 282266 and 285400

REPAIRS: Minor repairs available by machine shops in town of Iraklion. No facilities for deck repairs.

AIRPORT: Distance 5 km. Now an international airport with numerous flights.

TIME: GMT plus 2 hours, permanent.

HOLIDAYS: Usual Greek holidays plus local holidays of 25th August and 11th November. Cargo work can be arranged on holidays subject additional costs.

POLICE/AMBULANCE/FIRE: Police, tel. 282241, 282430, 282316; Ambulance, tel, 282894, 282638; Fire, tel. 283555, 282333.

AUTHORITY: Central Port Authority of Iraklion.

ISTHMIA, Corinth Canal (incl. Sousakion): 37.55 N. 23.00 E.

DOCUMENTS:

Port Authorities
Crew List.
Passenger List.
Ship's Certificates.
Health Certificates.
Certificate of Anchorage Dues.
Customs
Customs papers and declarations.
Cargo Papers.
List of Stores and Provisions.
List of Crew's Personal Effects.

PILOTAGE: There are 11 Pilots for the Corinth Canal. Telegraphic address of Canal is "Corinth Canal", tel. 0741-24452. Master of vessel must give at least 4 hours notice of ETA in order to avoid delay. For Pilot signals, etc., see article 7 of the New Company of the Corinth Canal "Regulation of Navigation and Tonnage".

ANCHORAGES: Open anchorage in Isthmia Bay.

RESTRICTIONS: Corinth Canal closed every Tuesday from 0600 hrs. to 2000 hrs. in order for maintenance work to be effected.

MAX. SIZE: The max. draft of ships negotiating the Canal, in relation to their width, is defined as below, assuming normal water level and normal weather conditions.

Width	*Maximum draft*
16.0 to 16.5 m.	6.2 m.
15.5 to 16.0 m.	6.2 m.
15.0 to 15.5 m.	6.6 m.
14.5 to 15.0 m.	6.8 m.
14.0 to 14.5 m.	7.0 m.

The max. draft for vessels of less than 14.0 m. width is 7.2 m. The max. width must not anyhow exceed 18.3 m. (60 ft.).

Special instances will be examined by the Master and the Canal Service in collaboration.

HEALTH: Pratique effected by health department of the Port Authority assisted by temporarily engaged doctor. In cases of suspected contagious disease vessel will be held under quarantine and if necessary fumigation will be conducted at Piraeus.

VHF: Corinth Canal Pilots on VHF Channel 11.

TUGS: Join vessel near Canal entrance at Isthmia and Possidonia. Ship's lines always used.

BERTHING: In Sousakion at private factory pier. No berths at Isthmia.

MEDICAL: Agent should be advised in advance of number of crew needing medical assistance, also information of any vaccination required.

FRESH WATER: Not available either at Sousakion or in the Canal.

FUEL: No fuel available at Corinth.

CUSTOMS ALLOWANCES: Each crew member allowed 200 cigarettes out bond and 1 bottle wine/spirits.

CARGO GEAR: Loading/discharging by ship's gear.

AIRPORT: 100 km. distance.

TIME: GMT plus 2 hours, permanent.

POLICE/FIRE/AMBULANCE: Police, tel. 22129.

DELAYS: Possible delay up to 1.5 hours in transitting Canal if another vessel already transitting canal from opposite direction.

SHIPMASTER'S REPORT: 1977

Vessel: 5,700 g.r.t., 9,200 d.w.t., Summer draft 24 ft. 07 in., LOA 409 ft. 05 in.

Documents: No special entry papers required and if anchoring to await the berth Customs and Immigration will usually board at anchorage.

Port of Corinth: The port has no VHF communications but messages can be passed through the Corinth Canal Pilot Station on Channel 11. Pilot will then telephone Agents.

Anchoring off the port in the case of delay is possible but cannot be described as safe due to the close proximity of land or shoal water. Holding ground, however, is good. This vessel anchored with Corinth Breakwater light bearing 248° in about 16 fathoms of water using 6 shackles of cable. Vessel rode out a force 7/8 gale from the North without dragging but with the cable fully stretched the bridge was only 2.3 cables from the breakwater and too close for comfort. A second anchorage was used with the breakwater light bearing 232° and the ship's bridge 5.6 cables from the breakwater in about 18 fathoms of water. Again with the cable fully stretched this gave a clearance off the nearest shoal water of 3 cables, 6 shackles of cable being used. This is a slightly more comfortable position and again gale force winds were experienced without dragging. The vessel did drag in this position but not until winds were gusting to force 9 as a prelude to very severe storm conditions in which no anchorage of this nature would have been satisfactory. The bottom is stiff grey mud and care must be taken when anchoring not to impede the traffic approaching the canal entrance. Anchoring further to the Westward in order to increase the clearance from shoal water, etc., is not recommended as in addition to the much greater depth of water the holding ground deteriorates, becoming crumbly mud.

A boat can be provided by the Agents for use as a liberty boat when at anchor and there is no objection on the part of the Authorities to using the ship's boats for runs ashore.

A first examination of the chart (B.A. Chart No. 1600) will not indicate anywhere to berth a vessel of this size. However, dredging work has been carried out and the berth is on the S.E. side of the breakwater where there is room for a vessel of this size and for one small coaster in addition. The breakwater itself is slightly different in shape from that shown on the chart and building and dredging work are still in progress at its seaward end. The green flashing buoy shown on the chart is no longer in position but a light of similar characteristics is now shown from a structure on the breakwater end.

Maximum draft for berthing is 6.7 m. (22 ft.) and on this vessel's first call soundings between ship and quay when alongside indicated depths of between 24 and 26 ft., depths outside the ship being some 5 ft. greater.

A Pilot is available, and is of great assistance. He is an experienced shipmaster and has very good local knowledge. A small tug is presently employed shifting barges and cranes employed in harbour works and it is sometimes possible to use his services. This is dependent upon the tugmaster. He is particularly useful when undocking to hold the stern off the quay.

Initial approach to the berth is bow on until the starboard anchor has been let go which should be done at such a distance from the berth so as to allow 4 shackles of cable in the water when the vessel is alongside. Vessel is gradually swung on the anchor, long head and stern ropes are run by boat, and vessel is so brought alongside port side to.

The undocking operation is straightforward, the bow being pulled off the quay by means of the anchor. The only danger is that of the propeller coming into contact with the quay and here the services of the tug are valuable.

Docking and undocking in strong winds from any direction would be hazardous and in many cases impossible. Docking is always done in daylight and I do not recommend undocking at night either although this would be possible under calm conditions. An added disadvantage of undocking in evening time would be that the vessel would arrive at the Narrows ferry crossing in dark hours.

The Pilot agrees with this appraisal of the situation.

The quay itself is smooth concrete usually well fendered with rubber tyres and with good mooring posts. Vessel should be well secured as strong winds from a Northerly direction are experienced particularly in Winter.

There is a concrete apron some 3 metres wide alongside the ship and clear of this a considerable unsurfaced area on to which cargo is discharged. This area is very wet and dirty during rain.

Fresh water is available but 7 lengths of ship's hose are necessary to reach the outlet. A permanent water main is in the process of being laid alongside the ship.

Cargo operation: This is controlled by the 'Carton Pack' plant manager, there being no stevedore as such. Ship's gear is used and normally 3 gangs of stevedores.

The working day is from 0800 to 1700 hrs., evening overtime being unusual. Seven day working is possible but all overtime is subject to the plant working to receive the cargo.

Stevedores can discharge rapidly from the ship lifting 2 rolls of linerboard at a time but there are frequent stoppages due to congestion on the quay which reduces the overall discharge rate to about 25–27 rolls per gang hour. Although head and end clamps are provided by Charterers (carried on board) stevedores refuse to use these and all discharge is by rope sling. Rolls are landed on wooden platforms (timber supplied by Charterers) and then rolled by hand clear of the concrete apron. Two or possibly 3 fork lifts are used to load rolls from here onto lorries for transportation to the plant a short distance away.

Damage rate is high due to rolls becoming wet and dirty on the unsurfaced quay with bands being broken and outer layers torn. Further damage is caused by the fork lifts when loading the lorries.

No improvement in discharging conditions can be seen unless the quay is surfaced with proper drainage and unless Charterers are prepared to provide clamp machines for handling the rolls on the quay. Care should be taken when signing final outturn report as of course damages are written up to make it appear that they took place before discharge.

Weyerhaeuser are fully conversant with the situation.

Agents: Situated in Piraeus which is some 90 kms. away. They use sub-Agents in Corinth.

The sub-Agents are not geared for handling a foreign-going ship. To obtain action on major items it is best to telephone Agent in Piraeus direct.

Bunkers: Basically not available but diesel oil has been taken, having been brought from Piraeus by road tanker and with ten days ordering notice.

Repairs: These cannot be carried out except by bringing repairers from Piraeus at very high cost.

Lloyds' surveyor is obtainable from Piraeus, this being best arranged directly by the ship.

Provisions: These can be obtained locally and are of acceptable quality. There is no ship chandler as such and the system is for the Catering Officer to visit various suppliers with the Agents, pick his purchases and then leave Agents to collect and deliver to the ship.

Shore Leave: Passes are required and are renewed each visit. They should be available for return to Immigration on departure.

Corinth Canal: This vessel passed through the canal on the 4th November, 1977 on a draft of 3.6 m. forward and 4.74 m. aft.

Application should be made in advance to the Canal Authority quoting the minimum draft obtainable.

The transit presented no difficulties.

AUTHORITY: Port Authority of Isthmia.

ITEA: 38.26 N. 22.25 E.

DOCUMENTS:
- 2 Crew Lists.
- 2 Passenger Lists.
- Cargo Manifest.
- Bills of Lading.
- List of Ship's Stores and Spares.
- Health Declaration.
- Ship's Certificates.

PILOTAGE: Vessel should advise ETA at least 24 hours before arrival through the telegraphic office of Itea. Pilots are called by international code flag "G" or sound signal 2 long and 1 short blast.

Pilot boards 1 mile S.E. jetty lighthouse. Pilot boat painted black with white deckhouse, the word "Pilot" is painted in white letters on both sides. On the bow is painted "PY21".

In bad weather vessel should enter harbour without Pilot and anchor using both anchors.

ANCHORAGE: Available inside the harbour and in Aggolis Gulf. Safe anchorage in the vicinity of the jetty head in depths of 8–10 m.

RESTRICTIONS: Vessel may enter harbour day or night. Harbour anchorage suitable for vessels up to 60 ft. draft.

HEALTH: Pratique is given on arrival by the port medical officer.

TUGS: None available.

STEVEDORES: Gangs should be ordered in advance by Agents on basis of Masters ETA. Loading and discharging is effected by ship's gear.

MEDICAL: 24 hours notice preferred if any medical requirements. Hospital facilities available. Vaccination can be arranged within 24 hours.

DENSITY: 1025.

FRESH WATER: Not available.

FUEL: Not available.

DEVELOPMENTS: Extension and widening of the existing breakwater and the construction of a second breakwater.

HATCHES: Hatches are opened and closed by ship's crew.

CUSTOMS ALLOWANCES: 200 cigarettes and 1 opened bottle of alcohol is allowed each man.

IDENTIFICATION CARDS: Needed for crew men going ashore.

CONSULS: No local representation.

REPAIRS: No facilities for repairs.

REPATRIATION: Can be arranged.

TIME: GMT plus 2 hours all through the year.

HOLIDAYS: Cargo work can be effected on all holidays on payment of overtime.

POLICE: Tel. 222.

AUTHORITY: Port Authority of Itea.

KALAMATA: 37.02 N. 22.07 E.

PORT LIMITS: The seaward boundaries of the port within which a vessel is considered to be an "arrived vessel" and (subject to Charter-Party Terms) laytime commences to count are 0.5 mile from the breakwater red light, where Pilot boards.

DOCUMENTS:
- 5 Crew Lists (Greek flag vessels).
- 3 Crew Lists (foreign flag vessels).
- 2 Passenger Lists.
- Customs documents.
- Bill of Health.
- Bill of Lading.
- All ship's papers.

PILOTAGE: Notice of ETA required 48 hours before arrival. No VHF. Call Pilot by international code signals on arrival. Pilot boards by motor boat about 0.5 mile from the breakwater red light, weather permitting.

ANCHORAGE: Vessels waiting Pilot may anchor half-a-mile East of the breakwater red light.

MAX. SIZE: Vessels up to 29 ft. draft may enter harbour. For berthing alongside the West mole, max. length 382 m., max. draft 24 ft.

For berthing alongside the North mole, max. length 158 m., max. draft 13 ft.

For berthing alongside the East mole, max. length 170 m., max. draft 29 ft.

For berthing alongside the North-east mole, max., length 161 m., max. draft 29 ft.

A new dock under Construction max. length 145 m., max. draft 29 ft.

HEALTH: Port Health doctor boards vessel on arrival or alongside the berth. Master required to produce Fumigation Certificate and Declaration of Health. Health visit not necessary for vessels coming from a Greek port.

RADIO: Athens Radio, call sign SVA.

TUGS: No tugs available.

BERTHING: Agents require details of vessel's draft in advance to

get berthing permission from Harbour Authorities. West Mole, length 430 m.
SPECIALISED CARGO HANDLING FACILITIES: There is a silo for grain. The other special cargoes discharging equipped by ship's gear. No facilities for containers or roll-on/roll-off traffic. For liquid chemical carriers there are 2 pumps with electric system. There are 2 cranes on vehicle, 3 and 40 tons capacity. Also there is 1 lifting machine. No other facilities.
STEVEDORES: Number of gangs required to be advised Agent in good time.
MEDICAL: Doctors and medical assistance available.
FRESH WATER: Can be supplied from the berth at about 15 t.p.h.
FUEL: Can only be supplied by road tankers – subject to advance notice.
DEVELOPMENTS: New berths under construction to accommodate vessels up to 30 ft. draft.

It is planned to build a shipyard at Kalamata. During the first phase the yard is likely to concentrate on the building of bulk carriers and tankers up to 75,000 tons d.w.t.
WATCHMEN: If required watchmen available from shore.
HATCHES: Can be opened and closed either by crew or by stevedores subject to regulation payments for this work.
CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle of spirits per man.
CONSULS:
Sweden tel. 22479
Netherlands tel. 22881
REPAIRS: Minor repairs can be effected in shore machine shops. No dry docks.
REPATRIATION: Can be arranged.
AIRPORT: Situated 6 miles away. Flights to Athens 2 times a day.
TIME: GMT plus 2 hours all the year round.
HOLIDAYS: Additional local holidays are Ascension Day and St. Dionysio's Day.
POLICE/FIRE/AMBULANCE: Police tel. 22622; Fire tel. 28273; Ambulance tel. 25555.
SHORE LEAVE: Allowed. Shore passes issued by Harbour Authorities.
AUTHORITY: Kalamata Harbour Master's Office.

KALI LIMENES, Crete: 34.56 N. 24.50 E.

DOCUMENTS: Vessels may arrive for bunkering without obtaining free pratique. However, if pratique is effected, vessels should have ship's papers ready for inspection, also 4 Crew Lists, 4 Passenger Lists, Cargo Manifest and a List of Stores and Provisions.
PILOTAGE: 1 private Pilot employed by the bunkering company SEKA who undertakes pilotage for vessels calling for bunkers. Pilot boat is a small boat equipped with signal lamp. Pilot boards about 5 miles East of Aghios Pavlos (St. Paul) Islet. Vessels awaiting Pilot may anchor 15 miles East of Aghios Pavlos Islet.
ANCHORAGES: (See "Pilotage") Vessels may anchor in area between Aghios Pavlos Islet and Mavronissi, which is a safe anchorage.
MAX. SIZE: Vessels in ballast of up to 80,000 d.w.t. and max. draft 14 m. can enter port.
HEALTH: Vessels arriving from foreign ports wishing to obtain free pratique should cable Agents to arrange for boarding of Health Inspector. Free pratique automatic if arriving from another Greek port.
TUGS: There is 1 tug, but it is seldom used.
MEDICAL: Agent should be advised well in advance if medical assistance required. There are no hospitals or other local facilities and doctor has to be called from nearest town.
TANKERS: 3 berths North of Aghios Pavlos Islet, max. draft 14 m.
FRESH WATER: Unlimited supplies available.
FUEL: Unlimited supplies available subject adequate advance notice. Supplied by Mobil only.
FIRE PRECAUTIONS: Portable foam-fire extinguishers.
CUSTOMS ALLOWANCES: 200 cigarettes permitted to each crew member to be held out of bond, and 1 bottle of wine/spirits.
CONSULS: None.
REPAIRS: None.
AIRPORT: At Iraklion, 75 km. distant.
TIME: GMT plus 2 hours, permanent.
SHORE LEAVE: Permitted if free pratique requested and granted.
SHIPMASTERS REPORT: 1976

Pilotage: Pilot boards about 1 mile South of Aghios Pavlos.

Anchorage: Half a mile E.N.E. of Mavronissi, depth of water 30 ft.

Max. Size: According to Pilot; 100,000 d.w.t. in ballast and max. draft 44 ft.

Pumping Rate: Fuel – 1,000 t.p.h., diesel – 200 t.p.h.

ETA: Send ETA 48 hours in advance through Radio Athens. The bunker station can be reached direct on 2320 kHz.
AUTHORITY: Port Authority Station.

KATAKOLON: 37.39 N. 21.20 E. (See Plan Book)

DOCUMENTS:
Maritime Health Declaration.
Usual Ship's Certificates.
3 Crew Lists.
3 Passenger Lists.
2 Lists of Stores and Provisions.
2 Lists of Crew's Personal Effects.

PILOTAGE: Not compulsory. Port has 1 private Pilot whom vessel may use provided sufficient advance notice passed through Agent.
ANCHORAGES: Vessels can anchor at a distance of 2 cables from the head of the breakwater (bearing 300°). Safe anchorage for vessels of up to 30 ft. draft between positions 37.40 N. 21.19 E. and 37.40 N. 21.20 E.
MAX. SIZE: Max. safe draft 24 ft. Depth inside port 8 m. Length of pier 204 m.
STEVEDORES: No advance notice required. No shore facilities. Vessels load/discharge with own gear.
MEDICAL: No medical assistance in Katakolon, but facilities exist at the town of Pyrgos 13 kms. distant.
FUEL: Not available ex-berth, but can be delivered by tank truck from Patras or Kalamata.
FRESH WATER: Available. Capacity 20 cu. m. per hour.
HATCHES: Usually opened and closed by crew but this work can be carried out by stevedores subject consent of Port Authority. Cost as agreed between Master and stevedores.
IDENTIFICATION CARDS: Passes issued by Port Authority.
CONSULS: None.
REPAIRS: Not available in Katakolon. Small quantities of engine spares available in Pyrgos.
AIRPORT: Andravis Airport 26 kms. distant. Flights to Athens twice weekly.
TIME: GMT plus 2 hours, permanent.
HOLIDAYS: Usual Greek holidays plus local holidays of 6th December and 17th December.
POLICE/AMBULANCE/FIRE: Police and Immigration, tel. 41202; Fire brigade (Pyrgos), tel. 22633; Ambulance (Pyrgos), tel. 22344.
TELEPHONES: No facilities for placing on board.
SHORE LEAVE: Permitted.
AUTHORITY: Port Authority of Katakolon.

KAVALLA: 40.55 N. 24.25 E.

DOCUMENTS:
5 Crew Lists.
2 Lists of Foreign Exchange.
4 Passenger Lists.
2 Cargo Manifests.
2 Lists of Crew Personal Effects.
Copies of Bills of Lading and usual Ship's Certificates.

PILOTAGE: 24 hours notice of ETA to be passed to Agents or direct to Port Authorities. Vessels requiring Pilot should indicate with light and sound signals code letter "G" on arrival 5 miles from Kavalla lighthouse. Pilot boat is a tug 9 m. length. Pilot usually boards about 0.5 mile from breakwater light. In event bad weather, Pilot does not board, and vessel may take refuge N.W. of Cape Prinos at the head of Thasos Island. If strong South or S.W. winds prevailing, vessels recommended take refuge Eleftheron Bay. Vessels awaiting a Pilot may anchor 0.5 mile South of Kavalla lighthouse.
ANCHORAGE: 0.5 to 2 miles South of Kavalla lighthouse, depth 30 to 40 m. Bottom sand and mud.
MAX. SIZE: Max. length 150 m. with proportionate breadth. Max. draft 27 ft. Tidal range 2 ft.
HEALTH: Doctor boards vessel with Port Officer. Maritime Declaration of Health and Deratisation Certificate required. In case suspected disease or fever on board, Master should radio Port Authorities in advance. Pratique is automatic if arriving from another Greek port.
RADIO: No local radio station. Cables may be routed through Athinai Radio.
MEDICAL: Advance notice of medical requirements necessary. General hospital in Kavalla and numerous private clinics.
DENSITY: 1025.
FRESH WATER: Available at berth.
FUEL: None.
HATCHES: Opened and closed by crew.
CARGO GEAR: Vessel should have cargo gear ready on arrival in order to avoid delay.
CONSULS:
France Tel. 3163
Netherlands Tel. 3265
Finland Tel. 3467
Sweden Tel. 3669
REPAIRS: Minor repairs available.
AIRPORT: Distance 7 km. One flight daily to Athens.
TIME: GMT plus 2 hours, permanent.
HOLIDAYS: Standard Greek holidays. Local holiday 29th June.
POLICE/AMBULANCE/FIRE: Police, Tel. 3291; Fire, Tel. 1999.
AUTHORITY: Kavalla Port Authority.

LAVRION: 37.42 N. 24.04 E.

DOCUMENTS:
Maritime Declaration of Health with Crew's Vaccination Cards.
Cargo Manifests.
4 Crew Lists.

PILOTAGE: Address of Pilot station, Port Authority of Lavrion. Pilot boat is a motor launch 8 m. long, black hull with white stripe flying code flag "H". Vessels requiring Pilot should flash or sound letter "G". Pilot boards about half a mile from Green Light (AK. Ergastiria). In event of bad weather, boarding position is inside the buoy. Vessels awaiting Pilot should anchor close to the Green Light depending on vessel's size.

ANCHORAGE: See "Pilotage".
MAX. SIZE: Max. length about 130 m., max. draft 21 ft.
HEALTH: Health Officer and Port Officer board vessel on arrival. Maritime Declaration of Health should be submitted to Health Officer who examines any sick crew. Free pratique is not automatic.
BERTHING: Harbour open to S.E. winds, but otherwise sheltered and safe. There are two quays: one 330 ft. length, depth alongside 20 ft., and one of 260 ft. length, depth alongside 13 ft.

Mining company owns bridge elevator with capacity of 700 tons per day.
STEVEDORES: Advance notice required in order to arrange gangs. No shore cargo equipment, and cargo operations effected by ship's gear.
MEDICAL: Medical assistance available.
FRESH WATER: Can be supplied to vessels alongside berth from tanker trucks.
FUEL: Only small quantities available as existing fuel tank only 10 tons capacity. Can be supplied by tank trucks from Piraeus.
HATCHES: Opened and closed by crew.
CUSTOMS ALLOWANCES: 200 cigarettes per crew member allowed out of bond.
REPAIRS: Minor repairs only.
AIRPORT: Athens Airport, distance 45 km.
TIME: GMT plus 2 hours.
POLICE/AMBULANCE/FIRE: Police, tel. 25218; Ambulance, tel. 25340; Fire, tel. 25249.
HOLIDAYS: Local holiday 26th July.
AUTHORITY: Port Authority of Lavrion.

MEGARA: 38.00 N. 23.20 E. (See Plan Book)

Pier owned by Hellenic Refinery. Berth depth 42 ft. 6 in. at S.W. end, 44 ft. at N.E. end. 46–50 ft. available 1 m. from the berth. With suitable fendering berth can accommodate vessels up to 85,000 d.w.t. 3 tugs required for berthing/unberthing. Tide about 1 ft. plus or minus depending wind direction.
also see "Piraeus".
SHIPMASTER'S REPORT: Vessel 255,090 d.w.t. Discharged part cargo of approximately 115,000 tons. (See Shipmaster's Plan). Pilot boarded from a tug in position 1 mile South of Pakhi Island. Forward moorings consisted of 2 "first line ashore" 9 in. nylons in a long drift to the shore. This distance was estimated at about 300 m. 3×10 in. synthetic hawsers to buoys (2 to 1st buoy and 1 to 2nd buoy) with drifts of only 100 to 150 ft., the Pilot did not appear to have a lot of faith in the holding ability of the buoys. 3 × 5 in. wires led to the concrete jetty, and the 2 which were true backsprings, were very good with normal drift, but the wire from the after end of the foc's'le head to the stem of the jetty was very long and required a tug boat to carry it out as the boatmen could not handle it at the length. The starboard anchor, which was used for berthing was left out at 4 shackles.

Aft, the mooring consisted of 2 "first line ashore" 9 in. nylons in a long drift, exactly the same as forward. Then 2 × 10 in. synthetics to a buoy just clear of the quarter and 4 × 5 in. wires to the jetty. The 3 shown to the stem of the jetty all had to be carried out by a tug boat as forward.

My distrust of this berth is because of the lack of any wire breast lines and the main reliance being placed on the 4 nylons (two each end) which can stretch considerably if the breeze were to blow strongly offshore. There was only about 44 ft. of water alongside giving us a high freeboard.

At this berth it is necessary to use ship's gear to hold discharge hoses, 3 × 8 in. hoses being used.

According to the Pilot, it is preferable to use only ropes for mooring as they can be easily doubled up for length. His suggestion was that we should carry about 14 mooring ropes, with which I disagreed. He also advised that large tankers always berthed port side to, and I presume this is for V.L.C.C.'s as the next ship on berth came in starboard side alongside. She was about 50,000 tons.

With this ship there were 7 tugs in attendance berthing and 8 unberthing; at the most, 3 of them have sufficient power, the others were very weak when assisting us.

MILOS ISLAND: (Adamas, Voudia Bay) (See Plan Book)

DOCUMENTS:
4 Crew Lists.
3 Passenger Lists.
2 Provisions Lists.
2 Personal Effects Lists.
Vaccination Certificates.
Deratisation Certificate.
Manifest (in duplicate)
Certificate of Registry.
Load-line Certificate.
Safety Equipment Certificate.
Radio-telegraphy Certificate.
Certificate of Measurement.
PILOTAGE: No Pilot station. Vessels requiring a Pilot should sound 3 blasts on ship's siren. Pilot boards from small motor-boat. Agents may contact Pilot in advance of requirement by telephone.
ANCHORAGE: Safe anchorage in all parts of Milos Bay, where Adamas port is situated. Main anchorage in Milos Bay is on East side of Bombardos Cape, which has a lighthouse showing a fixed green light.
MAX. SIZE: Any size vessel may enter Adamas Port but berthing alongside is restricted to vessels of 16 ft. draft.

Ore loading berth at Voudia Bay (Privately owned by Messrs. Silver and Baryte Ore Mining Co.). No facilities for tankers. Ore loading Berth at Kanaba (Privately owned by Micobar Ore Mining Co.).
HEALTH: Authorities require 24 hours notice of arrival in order to grant free pratique to vessels arriving from a non-infectious country. Free pratique cannot be granted at Milos to vessels having disease on board nor to those arriving from an infected area. Such vessels are required to proceed to a main Greek port (Piraeus, Syros, etc.) to obtain health clearance.
RADIO: Athens Radio and Heraklion Radio.
TUGS: Not available.
STEVEDORES: Loading/discharging at Adamas is by means of ship's gear. Bagged cargo loading rate is 250 t.p.h. At Voudia Bay and Kanaba, bulk ore is loaded at a rate of 500 to 800 t.p.h. (Conveyor Belt).
MEDICAL: No hospitals, nor private clinics available. There are 3 doctors and 1 dentist resident on the Island. There is an airport on the Island with regular services to Athens. Also in case of illness, the possibility of an emergency service.
FRESH WATER: Available to vessels alongside using ship's hoses. Delivery alongside up to 30 cu. m. in 12 hours.
FUEL: Small quantities lubricants available.
DEVELOPMENTS: Intentions to extend existing wharf up to 70 m. with depth increases up to 30 ft. (This development has been delayed for economic reasons).
OPENING/CLOSING HATCHES: Opened and closed by crew.
CUSTOMS ALLOWANCES: 200 cigarettes and 1 opened bottle of spirits per person.
REPAIRS: Minor oxy-acetylene repairs available.
TIME: GMT plus 2 hours.
HOLIDAYS: Sundays and customary holidays. Cargo work can be arranged on these days at 75% increase on tariff rates.
TELEPHONES: Police 21-204; Port Authority 41-607.
SHORE LEAVE: Permitted.
DELAYS: Strong Southerly winds may delay berthing, or force vessel to leave loading berth at Voudia Bay.
SHIPMASTER'S REPORT No. 1: *Voudia Bay:* Fresh water is available using vessels own hoses. Limited quantity of provisions are available. Hire of polypropylene ropes of 150 m. length is possible.

It is advisable to close ventilators before loading due to excessive dust.

Pilot remains on board during loading.
Cargo: Perlite.
Loading rate for bulk: 250 t.p.h.
Loading rate for bags: 18–20 t.p.h.

SHIPMASTERS REPORT No. 2: *Voudia Bay and Milos Island:* Situated on the N.E. corner of the island of Milos. When approaching from the S.E. the most prominent features are the scarred terrain, the factory building and the silo which is situated just above the berth. The loading gantry has both fixed red and white lights on it and is conspicuous.

Anchorage: The vessel anchored in a position with the loader bearing 302° T. distance 7.5 cables in 48.5 m. of water using 5 shackles of cable, the holding appeared to be good. The recommended anchorage is in a position with the loader bearing 328° distance 5 cables where holding is reported to be good. There was another vessel in that position at the time.

Caution: This anchorage is not recommended in strong South to S.E. winds due to the seas that build up in the Bay. Vessels are recommended to go to the North of Pilonisi Island and anchor in a position N.W. of the North West point, a distance of not less than 3 cables. This island is now joined to the main island by rubble from the factory, this is not shown on the Chart (1832).

Method of Berthing: (See Plans). Approach to the berth is made heading in a N.W.'ly direction, keeping the Northern most buoy (A) close to the starboard side and when the bow is passed about a third of the ship's length, the starboard anchor is let go and let run until about 4 shackles on deck, then it is checked, in the meantime a boat will take a breastrope from for'd, run from the port shoulder lead (1). Once this is ashore and the vessel begins to cant to starboard, the bow is worked into position by heaving on the breastrope and slacking the cable until there is about 6 shackles on the latter. Meanwhile, a line is run from the starboard quarter (2) to buoy (B). A word of caution here, the berth is designee to take vessels up to 23,000 tons, so for a small vessel it will be necessary to have 2 ropes joined together for moorings (2), (4) and (5). The next line sent away is one from the Port Quarter to ashore as a breastrope (3), the stern is then brought into position in a similar manner to the bow. As the prevailing wind is from ahead usually, the next rope sent away is the head line (4) and finally the stern line (5). The latter two are used for shifting the vessel under the loader. Directly under the loading gantry, there is a dolphin arrangement to keep the vessel off the cliff, but on completion of mooring, the vessel should end up about 6 to 10 ft. off this.

Caution: In strong South to S.E. winds, the berth becomes dangerous and vessels have to leave and go to anchor and it is often necessary to leave the ropes on the buoys etc. as it is not possible to let them go. It is also advisable to retain some ballast on board for berthing.

There are 2 Pilots, both speaking English, the younger, an ex-

Chief Officer has the better command of English and was the source of a lot of this information.

On leaving the berth, the last rope to be let go is (2) and with a smaller vessel, this can safely let go while weighing anchor. Vessel will then proceed to another anchorage close to, to secure, obtain clearance and clean up.

Loading Procedure: Loading is done by a chute and at an approximate rate of 300 tonnes per hour. The cargo is very dusty and everything should be securely battened down and it is strongly advisable to wear goggles and protective masks on deck as the dust is choking and if it gets in the eyes, they should not be rubbed as it is abrasive and can cause permanent damage. Eyes should be washed out. The ship will advise what weight she can take, and as the weighing procedure ashore is liable to break down after the first 500 tonnes, vessel is loaded according to draft, which has to be carefully checked, as when stipulating amounts required per hatch, they will not necessarily keep to this unless told. A boat is available for checking the draft, 1 blast on the whistle will summon it. Only method of getting ashore is by boat, so it is necessary to have the starboard gangway down. Both foreman and boatman have a fair knowledge of English, but foreman does not come aboard but stays on the loader, so it is necessary to shout instructions etc. The foreman will advise on shifting for position required, this is done with the aid of frequent blasts on a pocket whistle. Only one man comes aboard and that is to tend the chute.

There appears to be a continual short swell which makes draft reading a little difficult.

Entry and Clearance: Agent, Doctor, Customs and Harbour Master boarded the vessel at anchor and entered her there. Forms on board were not acceptable, but they transferred them to their own. I understand that the only acceptable forms are the standard IMCO ones, and if there are any of these on board they should be used.

Forms required:
2 Crew Declarations.
3 Crew Lists.
2 Bonded Stores List.
2 Stores Lists.
1 Vaccination list (Including Cholera).

There are various other forms to sign, but these are prepared by the Agent. The Health Declaration is made out by the doctor in his book. The Agent, who is from the Mining Company, spoke very good English.

Weather: Northerly winds predominate during the Summer and can become quite strong during September, mainly from midnight to noon.

AUTHORITY: Port Authority of Milos.

MITYLENE (incl. Geras Bay and Pamfyllon): 39.06 N. 26.35 E.

DOCUMENTS:
4 Crew Lists.
2 Cargo Manifests.
2 Passenger Lists.
2 Stores Lists.

PILOTAGE: No official Pilot, but if required the services of 2 experienced Mercantile Marine officers having knowledge of the port may be used.

ANCHORAGE: Before town of Mitylene, in depths of about 18 m., extreme East of Kastro Peninsula or Fokiotrypa light, bearing due North.

MAX. SIZE: Length 120 m. draft 17 ft. at Inner Port. Length 160 m., draft 28 ft. at Outer Port.

HEALTH: On arrival from foreign port, Port Officer, Customs Officer and Medical Officer board vessel for pratique. Pratique automatic if arriving from another Greek port.

BERTHING: At least 24 hours notice of ETA required for berthing allocation.

STEVEDORES: At least 8 hours notice of number of stevedores required to be given.

MEDICAL: In event of illness on board, Master should cable details prior arrival. Medical clinics and hospital available.

TANKERS: Geras Bay (Mamidakis) and Pamfila (Purfina).

FRESH WATER: Available. Supply rate 40/50 tons per vessel every 24 hours.

FUEL: Available at Purfina and Mamidakis installations. Supplies to Mitylene port by tanker trucks only, and advance notice required.

DEVELOPMENTS: A pier to be constructed in the Outer port, with depth of 15 ft. alongside.

HATCHES: Opened and closed by crew.

CUSTOMS ALLOWANCES: 200 cigarettes allowed per crew member out of bond.

CONSULS:

Sweden	Tel. 28494	Belgium	Tel. 28494
Netherlands	,, 28760	France	,, 28151

REPAIRS: Two local machine shops undertake very minor repairs.

AIRPORT: 8 km/s from the port. 2 daily flights to Athens.

TIME: GMT plus 2 hours, permanent. From 15th April until 10th October there is Summertime.

HOLIDAYS: In addition to usual Greek holidays, local holiday on 6th December. Cargo work can be arranged subject additional charge.

POLICE/AMBULANCE/FIRE: Police, Tel. 100 and 22021; Fire Brigade, Tel. 199; Hospital, Tel. 28412 and 22005.

AUTHORITY: Mitylene Port Authority.

MYKONOS: 37.27 N. 25.20 E.

Vessels in excess of 22,000 d.w.t. have been accommodated. Loading of Barytes ore at rates up to 5,000 tons per day. In Winter when North winds prevail conditions are satisfactory for loading: however, loading position considered unsafe when S.W. or West winds prevailing. When sufficient cargo is available vessels can load in 2 days.

PATRAS (including Rio): 38.14 N. 21.45 E.

(See Plan Book)

DOCUMENTS: Port Authorities: 2 Crew Lists, Customs: Declaration of Cargo and Passengers.

PILOTAGES: Advance notice of ETA to be passed to Agents who arrange Pilot. Vessels without Agents should advise authority of ETA through Athens Radio, or on arrival outside harbour make International Code sounds and signals for vessels requiring a Pilot. Pilot boat is small boat carrying pilot flag. Pilot usually boards less than 1 mile outside harbour entrance. VHF contact possible with Port Authority and Pilot on Channel 12.

ANCHORAGES: Patras Roads are safe enough, when very strong W/NW winds blow, vessels may anchor at Nafpaktos Roads.

RESTRICTIONS: Port entrance has depth of 32 ft. At main harbour vessels having draft in excess of 28 ft. cannot berth. The limit at the new berth is 32 ft. draft. There is 1 red and 1 green light buoy in position of the intended line of extension to Northern part of breakwater (extension of 250 m.) where work is in progress. Buoys are about 600 m. from permanent lights marking North entrance to the harbour, and indicate shallow water.

MAX. SIZE: Vessels of less than 34 ft. draft. No restrictions on length or breadth. Height of tide, max. 0.55 m., does not affect size of vessel.

HEALTH: Pratique in accordance with International Regulations.

RADIO: Athens Radio.

TUGS: Two tugs, 1,000 h.p. and 1,120 h.p. Use of tug compulsory for all vessels over 1,000 tons gross. Joins vessel at entrance to harbour. Ship's lines used.

BERTHING: In accordance with allocation given by Port Authority.

STEVEDORES: Advance notice of ETA required in order to arrange berth and order number of gangs to commence work immediately. General cargo rate about 80–100 t.p.h./gang, and bulk cargoes 75–90 tons. 7 shore cranes, capacity up to 25 tons available. One shore crane capacity 118 tonnes with container handling facilities.

TANKERS: No facilities at Patras, but Texaco-Restis berth at Rio for vessels up to 18 ft. and 2,500 tons alongside. No residue discharge facilities.

FRESH WATER: Supply line connected to all berths.

FUEL: Deliveries by tank trucks at Patras. Available at Texaco-Restis berth at Rio.

FIRE PRECAUTIONS: Vessels refuelling or discharging explosives or inflammable materials must apply to Port Fire Brigade to stand by.

DEVELOPMENTS: *(a)* Outer breakwater to be extended 600 m. in total.

(b) 4.7 m. is the depth along the newly constructed quay between Custom's House and fish steps.

(c) St. Nicolas pier – length: 200 m. – is now available for berthing ships on both sides. Depths alongside are equal to those in North and South basins.

(d) Astingos pier is reconstructed now having a 160 m. length on the South side and a 180 m. length on the North side. Depths alongside are same as in the basins.

WATCHMEN: Advisable to employ night-watchmen on large vessels.

HATCHES: Usually opened and closed by crew.

CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle wine/spirits allowed out of bond for each Crew member.

IDENTIFICATION CARDS: Crew are supplied with passes by Port Authority.

CONSULS:
Belgium
Germany
Denmark
Italy
Netherlands
Sweden
Finland
France
Switzerland

REPAIRS: Very minor repairs only.

REPATRIATION: All facilities for crew changes and repatriation.

AIRPORT: None.

TIME: Summertime – GMT plus 3 hours – from April 10 to end of September.

HOLIDAYS: In addition to general Greek holidays and Sundays, local holidays are 8th September, 30th November. Work can be arranged on these days subject to payment of additional charges.

POLICE/AMBULANCE/FIRE: Port Police, tel. 277–622; Patras Police Station, tel. 277–261; Ambulance, tel. 274–444; Fire Brigade, tel. 199.

TELEPHONES: Facilities for connecting on board.

SHORE LEAVE: Permitted.

AUTHORITY: Central Port Authority of Patras.

PIRAEUS: 37.56 N. 23.40 E. (See Plan Book)

Incl. AGHIOS GEORGIOS 37.57 N. 23.36 E.; KERATSINI: DRAPETZONA 37.56.30 N. 23.37 E., and PERAMA 37.58 N. 23.35 E.)

DOCUMENTS: All usual certificates including Registry, Measurement, Inspection, Load-line, Fumigation, Passenger Safety, Cargo Gear, and Radio.

9 Crew Lists.
2 Vaccination Certificates.
Cargo Manifest.
List of Provisions and Stores.
List of Spares.
Maritime Declaration of Health.
1 List Vaccination Dates.
1 Crew Effects Declaration.

Customs:

2 Special Forms in Triplicate.
1 Stores List.
Master's Declaration of typewriters and adding machines, etc.
Crew Passports, or Seamen's Books.
Passenger Passports.

PILOTAGE: Cable Agent well in advance advising ETA. Agent informs pilot office of vessel's arrival time.

Pilots can be contacted on VHF Channel 16 for calling, Channels 7 and 12 for communication. Pilot boat is a wooden vessel about 10 m. length with black-painted hull, word "Pilot" painted in white.

Vessels requiring Pilot should signal letter "G" by morse light or by ships whistle. Pilot boards vessel about 1.5 miles off entrance to harbour, except when very strong South winds prevailing, in which case vessel advised by VHF or by signal light that conditions impossible for Pilot boarding, and whether vessel permitted enter harbour at Master's risk.

If awaiting Pilot, anchorage is possible inside pilotage area of Piraeus – Aghios Kosmos – Piraeus Anchorage – Perama Anchorage – Megara Anchorage (Pachi).

ANCHORAGES: As above. Depths between 9 and 35 fathoms.

RESTRICTIONS: No restrictions for Aghios Georgios Harbour or Drapetzona excepting draft. Harbours open throughout 24 hours for entry and departure subject prevailing weather conditions. No tidal restrictions.

MAX. SIZE: (also see "Tankers") Aghios Georgios max. draft 32 ft. Drapetzona max. draft 38 ft. Piraeus max. draft 36 ft.

RADIO: Athinai Radio – SVA.

TUGS: Usually join vessel outside harbour, always using ship's lines. Over 30 tugs available. 10 of less than 1,000 h.p. and remainder over 1,000 h.p.

BERTHING: Agent must advise Piraeus Harbour Authorities in order to secure berth allocation.

CRANES: One gantry crane lifting capacity 10 tons, used for coal and bulk cargoes installed at Hercules Port. Hourly output of 160 tons.

63 electric wharf cranes with capacities of 2 to 15 tons installed along the wharf of the main port and at the dry and floating docks.

67 mobile cranes with capacities of 3 to 40 tons.

9 Straddle-carriers for containers, capacity 30 tons each.

4 floating cranes with capacities of 15, 30 and 100 tons.

BULK HANDLING FACILITIES: Silo suction-duct installations capable of moving grain at up to 150 t.p.h. and storage facility for 40,800 tons, as well as 2 mobile suction-duct units for bulk grain-cargoes.

STEVEDORES: Agent must submit letter of application to Piraeus Port Authorities for number of gangs required also time required to commence cargo work. Discharge usually effected with ship's own gear.

Normal work on loading/discharge of goods in the port is carried out by 2 regular shifts, the morning shift (0730 hrs. to 1430 hrs.) and the afternoon shift (1430 hrs. to 2130 hrs.). Likewise, upon application of the interested parties (ship-owners, Agents, consignees, shippers, etc.), and provided approval of the competent P.P.A. Service is obtained, a third, night shift can be assigned to the job if the necessary workers and operators are available. This shift is again of 7-hour duration, from 2030 hrs. to 0330 hrs. or can be extended to the morning hours if necessary. Exceptionally in the case of work on refrigerator vessels, on which work during the Summer period is limited to the afternoon hours, the Service can assign workers and operators of loading/discharge machinery, starting from 1630 hrs., for a 7-hour period which can be extended, if conditions warrant, to the morning of the next day. Loading/discharge work may also be undertaken on Sundays and other non-working days (holidays) such work being considered as totally extra, being burdened with extra charges accordingly.

MEDICAL: All medical and hospital facilities available. No advance notice required except in special cases.

TANKERS: Discharging effected at private installations.

Shell	max. draft 32 ft.	Petrolles	max. draft 29 ft.
B.P.	max. draft 36 ft.	Purfina	max. draft 28 ft.
Elvyn	max. draft 26 ft.	Mobil	max. draft 48 ft.

D.E.H. max. draft 36 ft. (outside steam generator factory, no facilities for going alongside).

DENSITY: 1025.

FRESH WATER: Available alongside berths. For vessels at anchor, water can be delivered by barges belonging to Piraeus Harbour authority at 50% additional cost.

FUEL: Gas oil, fuel oil and mixtures of both to a certain viscosity available. Advance notice of requirements should be sent to Agent order complete customer's requirements.

WATCHMEN: Required.

HATCHES: Opened and closed by stevedores.

CUSTOMS ALLOWANCES: Tobacco, 200 cigarettes per crew member allowed out of bond. Wine/spirits, one bottle.

CARGO GEAR: Before commencement of loading or discharge, cargo gear is examined by Piraeus Harbour Authorities.

IDENTIFICATION CARDS: Passes required for seamen going ashore.

CONSULS: The following countries maintain Consuls at Piraeus:

Denmark Italy Netherlands
Finland Norway Sweden

Other countries maintain Consulates resident in Athens.

REPAIRS: Facilities available for all kinds of deck and engine repairs.

DRY DOCKS: (A) Two permanent drydocks at Piraeus (a) Length 134.4 m., depth 9.27 m.; (b) Length 93.3 m., depth 8.0 m. (B) Two floating docks at Perama. *(a)* Length 202 m., depth 40 m., capacity 15,000 tons. *(b)* Length 113.6 m., depth 27.4 m., capacity 3,000 tons. Also see Eleusis and Syros.

REPATRIATION: All facilities for crew changes and repatriation.

AIRPORT: Athens Airport 10 km. distant from main harbour. Regular international flights.

TIME: GMT plus 2 hours. Permanent.

HOLIDAYS: In addition to Sundays, local holidays are: 1st January; Epiphany; Whit Monday; 25th March; Good Friday; Easter Monday; 1st May; Holy Trinity; 15th August; 28th October; 12th December; 25th December; Boxing Day.

Cargo work can be arranged on these days subject extra payment of 75%.

POLICE/AMBULANCE/FIRE: In emergency telephone Harbour office 188 or 4511-311. Subsidiary Harbour Department tel. 4612-876. Harbour Guard Aghios Georgios tel. 4612-876 or 4511-311/139. Harbour Guard Drapetzona tel. 4511-311/140. Police tel. 100. Fire service tel. 199.

TELEPHONES: Telephone connection on board can be made.

SERVICES: Compass adjusting, tank cleaning. No facilities for discharge of tank residues.

SHORE LEAVE: Permitted.

SPECIAL PRECAUTIONS: *Ship's Speed in Port:* Incoming or outgoing vessels must keep speed steady, provided weather conditions and vessel's manoeuvrability allow to do so, but never to exceed 5 knots.

Pollution in the Harbour: Throwing overboard of ballast, objects of any kind, oil, food rejects, and dirt in general is strictly prohibited. All such rejects can be jettisoned after ship's exit from the harbour and at a distance not less than 16 miles from the nearest coast. Alternatively, all such rubbish can be thrown in a special rubbish-collecting vessel in the port.

Sea Pollution by bunker oil or sediments: The jettisoning of oil products generally in any port or roadsteads less than 50 miles from the coast is strictly prohibited. Similarly prohibited is the pollution of the sea by jettisoning of oil-sediments during dry-docking or repairs of vessels.

Pollution of the Air: Strictly forbidden is the de-sooting of boilers of all vessels at Greek ports. Similarly prohibited is the exit of gases in the form of smoke, which poisons the atmosphere and endangers public health.

Overloading: If upon arrival or sailing the port authorities ascertain overloading of the vessel, heavy fines are imposed.

AUTHORITY: Central Piraeus Harbour Office, Second Harbour Department.

PYLOS: 36.55 N. 21.42 E.

(Including Sfaktiria and Navarino Bay)

DOCUMENTS:

For Port Authorities.

1. For ships under the Greek flag and foreign flag vessels of Greek ownership.
   Inspection of all Ship's Papers.
   7 Crew Lists with full details of crew members' home addresses.
   For passenger vessels – 6 Passenger Lists including passport details, that is, number, date of issue and nationality.
2. Foreign Flag Vessels.
   Inspection of all Ship's Papers.
   3 Crew Lists.

For Customs

Crew Personal Effects List.
1 Crew List.
Passenger List.
Lists of goods or effects to be sent ashore.
3 Lists of Stores and Spares.
Bills of Lading.
Cargo Manifest.

PILOTAGE: No Pilot station. There is a private Pilot employed by the bunkering company named G. Mamidakis Limited. Agent and/or bunkering company should be advised in advance of vessel's ETA order arrange Pilot to meet vessel at entrance of Navarino Bay and take vessel to oil installations at Sfaktiria Bay. ETA should be passed by radio telephone at least 48 hours before arrival and thereafter confirming ETA within 24 hours of arrival. If ETA has not been passed by radio, vessel should wait at entrance to Navarino Bay, and request Pilot by signalling letter "G" by flashing light or ship's whistle.

ANCHORAGES: Safe anchorage may be made in all areas of Navarino Bay except within red sector of Helonaki Islet light.

MAX. SIZE: Any size vessel can enter and anchor in Navarino Bay. The small harbour of Pylos is only suitable for small vessels.
HEALTH: Doctor visits vessels that require free pratique, and those coming from infected ports. Master and Health Officer together sign Maritime Declaration of Health. Free pratique continues when vessel arrives from another Greek port. A vessel in transit must have free pratique if remaining in port more than 24 hours. Infected vessels or suspected vessels remain under quarantine in accordance with existing health regulations.
RADIO: Athinai Radio – OTE.
TUGS: No tugs available.
STEVEDORES: Labour requirements passed by radio at least 24 hours prior arrival. No shore loading/discharging facilities and this work effected by ship's gear. Average rate load/discharge 100 tons per gang every 8 hours.
MEDICAL: Agent should be advised by cable prior arrival of medical and medicant requirements. There are two chemists and a Red Cross hospital. Yellow-fever, cholera and smallpox vaccination certificates required.
TANKERS: Sfaktiria Island Installation (ESAPP. G. Mamidakis Limited). 2 flexible hoses diameter 6 in. and 1 gas oil hose diameter 2.5 in. No facilities for residue discharge. At Pylos small harbour there is jetty 100 m. length, the head of which is reserved for small tankers carrying wine and spirits, which moor stern to quay. At head of pier, depth of water about 4 m., but within short distance from pier, depth increases to 10 m. Only 1 vessel of 12 ft. to 15 ft., draft can moor stern to quay at any time. Loading/discharging is effected through flexible and portable pipe-lines belonging to Gialovi Wine Factory at Pylos, and cargo is transported by special tank trucks.
DENSITY: 1023 in harbour basin and whole of Navarino Bay.
FRESH WATER: Master or Agent must apply in writing to Customs Authority, and application is to include notice from water supplier giving quantity to be supplied and cost of supply. Water barge capacity 200 tons. Rate of supply 160 t.p.h. by canvas hoses. Barge belongs to Maritime Agency I. Vrettakos, Pylos. Water also available alongside Pylos harbour quay.
FUEL: Mamidakis Fuel Installations at Sfaktiria Island. Vessels should give 48 hours notice to Mamidakis (Athens Office, address: Eleftheriou Venizelou 56; Tel. 622543 Tel. 284) Pylos Tel. 22282.
FIRE PRECAUTIONS: No unusual fire precautions at Sfaktiria Installations, but at main port of Pylos authorities do not allow loading/discharging of 2 vessels at same time, as the only 2 berths available are very close to each other.
DEVELOPMENTS: Work in progress to extend existing Pylos harbour pier to 215 m. length, 20 m. width, and 15 m. depth at head of pier. Depth inside pier to be 10 m.
WATCHMEN: Usually not necessary to employ watchmen, but if required, available.
HATCHES: Usually opened and closed by crew.
CUSTOMS ALLOWANCES: 2 packets of cigarettes per crew member/day allowed out of bond according to duration in port and this quantity to be declared on Stores List. Store orders for supply of additional quantities are allowed on the basis of the number of crew and the length of voyage, basis 2 packets per day per crew member. 1 opened bottle wine/spirits allowed out of bond.
IDENTIFICATION CARDS: Shore passes issued against submission of seamen's books.
REPAIRS: 3 workshops for minor repairs.
REPATRIATION: Crew changes and repatriation facilities available.
AIRPORT: Kalamata Airport, 40 km. from Pylos. Kalamata/Athens flights every day at 17.50 hrs. Athens/Kalamata every day flights at 19.10 hrs.
TIME: GMT plus 2 hours permanent.
HOLIDAYS: *(a)* Standard Government Holidays; *(b)* Local holidays: 9th May (St. Nicholas) holiday for port workers; 24th September; 20th October (Anniversary of Battle of Navarino). During these holidays, cargo work can be arranged subject overtime payment.
POLICE/AMBULANCE/FIRE: Police (Pylos) 223-16; Greek Red Cross Hospital Pylos 223-15; Kalamata Fire Brigade 28373.
TELEPHONES: No facilities for placing on board.
GENERAL: Very severe fines imposed on oil pollution.
SHORE LEAVE: Allowed.
AUTHORITY: Port Authority of Pylos.

RHODES (including Akantias): 36.25 N. 28.17 E.

DOCUMENTS:
3 Crew Lists.
3 Passenger Lists.
1 Cargo Manifest.
1 Stores and Provisions List.
Usual Ship's Documents.
PILOTAGE: 24 hours notice required by Rhodes Port Authority. Pilot boards 1 mile from port.
ANCHORAGE: Suitable anchorage up to a distance of 300 m. from the port East of the pier extension.
RESTRICTIONS: Port entry can be difficult and sometimes impossible with strong North or N.E. winds.
MAX. SIZE: Up to 24 ft. draft.
RADIO: Rodos Radio, 2182 kc/s.
BERTHING: Pilot will advise Master of berthing place in accordance with Port Authority instructions.

2 diesel motor-driven cranes capacity 2 and 3 tons available for discharging. No facilities for containers.
STEVEDORES: 24 hours advance notice required in order to arrange gangs.
MEDICAL: General hospital and private clinics available.
FRESH WATER: Available – supplied by canvas hoses.
FUEL: Deliveries only by tank trucks.
DEVELOPMENTS: Extension of the Merchant Port Pier by 110 m. to North and 140 m. to S.E. Also an extension of the new harbour (Akantias) pier, to the East of the Marine Harbour. Length to be 480 m. with a depth of 6.5 m. alongside.
HATCHES: Opened and closed by crew.
CUSTOMS ALLOWANCES: 60 cigarettes per day per crew member and 1 bottle wine/spirits per crew member allowed out of bond.
CONSULS:

Germany	Tel. 7479	France	Tel. 2318
Italy	,, 7432	Turkey	,, 3362
Sweden	,, 3379		

REPAIRS: Minor repairs only.
AIRPORT: Distance 15 km/s. During Winter, flights twice daily to Athens, and during Summer, flights 5 times daily.
TIME: GMT plus 2 hours, permanent.
HOLIDAYS: 1st January, 6th January, 7th March, 25th March, Good Friday, Easter Monday, 21st May, 15th August, 28th October, 8th November, Christmas Day, Boxing Day.
POLICE/AMBULANCE/FIRE: Police, tel. 7690 or 2220; Ambulance, tel. 2555; Fire Brigade, tel. 3333.
DELAYS: Sometimes necessary to remain outside harbour up to 3 hours to allow coastal passenger vessels to berth if other berths are full.
AUTHORITY: Central Port Authority of Rhodes.

SUDA BAY, Crete: 35.29 N. 24.09 E.

PILOTAGE: Compulsory. Naval Pilot boards West of N. Soudha Island.
ANCHORAGE: Good anchorage for any size vessels.
TANKERS: Marathe POL Depot has wooden-faced concrete jetty. 10 in. discharge lines. No bunkers. No slop discharge facilities.
FRESH WATER: Available by barge.
GENERAL: Cargo pier depth up to 32 ft. alongside, also grain silo with similar depth alongside.

SYROS: 37.26 N. 24.56 E.

DOCUMENTS: *Ships under the Greek flag* – documents required are:
Ship's Register.
Seaworthiness Certificate.
Log Books and Ship's Papers.
Load-line Certificate.
Radio Station Licence.
Fumigation Certificate.
4 Crew Lists.
2 Passenger Lists.
Ships under foreign flag, Greek owned – documents required are:
Ship's Articles.
Load-line Certificate.
Seaworthiness Certificate.
Ship's Papers.
Radio Station Licence.
Fumigation Certificate.
4 Crew Lists.
1 Passenger List.
Ships under foreign flag – documents required are:
Seaworthiness Certificate.
Fumigation Certificate.
Load-line Certificate.
Radio Station Licence.
2 Crew Lists.
1 Passenger List.
PILOTAGE: Pilot to be ordered by ship's Agent at least 24 hours before arrival notifying approximate ETA. Pilot boards from private motor launch, about 0.5 miles off the port, weather permitting. In bad weather Pilot boards in harbour entrance.
ANCHORAGE: Vessels awaiting Pilot anchor outside the harbour South of a line between the green breakwater light and the North end of Gaidaros Island. Anchorage in the Southern part of the harbour in depths of 20–30 m.
MAX. SIZE: Length 200 m. Vessels of small draft may go alongside the Neorion Pier or moor stern to the pier. Deeper-draft vessels remain at anchor in the harbour.
HEALTH: Free pratique is given when ship's declaration of health has been endorsed by a Health Officer.
RADIO: Loutsa Radio.
TUGS: 2 tugs available. Tugs usually join vessel 1 mile from harbour entrance. Payment for use of tug-line is obligatory.
STEVEDORES: At least 1 day's notice required to arrange gangs.
MEDICAL: No advance notice required if medical assistance needed. Hospital and general clinic available.
TANKERS: Discharge alongside terminal of A. E. Seica at Lazareta, near the entrance to the harbour.
DENSITY: 1026.
FRESH WATER: Limited quantity can be supplied by private company. Delivered by barge.

FUEL: Can be supplied by A. E. Seica, by barge or pipe-line.
WATCHMEN: Not required.
HATCHES: Opened and closed by ship's crew.
CUSTOMS ALLOWANCE: Each man allowed 40 cigarettes per day for period not exceeding 5 days. Each man allowed 1 opened bottle of spirits. No restrictions for wine.
IDENTIFICATION CARDS: Shore passes are issued on production of seamens books or passports.
CONSULS: France – tel. 3–62. Netherlands – tel. 7–20.
REPAIRS: Neorion Syros Shipyards can undertake any kind of engine and hull repairs and alterations. Holds LTC licence for piston reconditioning.
DRY DOCKS: Two floating docks, one for ships up to 20,000 d.w.t., and one for vessels up to 75,000 d.w.t.

Dimensions of larger dock; 210 m. length over keel blocks; 36.20 m. inner width; 17.40 m. moulded depth.

DEVELOPMENTS: Port being dredged to permit entry of larger vessels. Shipyard installing facilities for building vessels up to 15,000 tons.
REPATRIATION: Can be arranged.
TIME: GMT plus 2 hours all the year round.
REGULATIONS: Port Captain should be contacted for any queries not covered by lists of regulations provided on arrival.
HOLIDAYS: Work may be arranged on all holidays on payment of 75% additional to tariff.
POLICE/FIRE/AMBULANCE: Police tel. 6–10; Fire 3–33; Ambulance 5–55.
TELEPHONES: Cannot be connected on board.
SHORE LEAVE: Crew may go ashore after pratique is given, carrying shore leave passes issued by Port Authority.
AUTHORITY: The Harbour Office of Syros.

THESSALONIKI (Salonica); 40.38 N. 22.56 E. (See Plan Book)

PORT LIMITS: A vessel is considered as an "arrived vessel" when she has passed the line connecting the Small Kara Point and Paliomanna light buoy.
DOCUMENTS: For Greek flag and Greek-owned vessels:

List of Foreign Exchange.
Crew list (additional for Port Authority).

All vessels:

4 Crew Lists (Port Authority, Customs, Immigration and Health).
1 List of Stores.
1 List of Personal Effects.
Copies of Bills of Lading and Cargo Manifest.

PILOTAGE: Apply for Pilot through VHF Channel 12 or by international code signals. Pilot meets vessel about 1,000 m. S.E. of breakwater light (white). Pilot boat is small motor-boat carrying pilot flag.
ANCHORAGES: Area from 500 to 1,000 m. S.E. of port offers safe anchorage.
MAX. SIZE: Average safe depth of water 10 m. 2 berths of 35 ft. depth. Also see "Tankers".
HEALTH: Health Officer boards vessels from foreign ports to grant free pratique.
RADIO: Radio Thessalonika. 24 hours notice of ETA required to obtain berth and stevedores.
VHF: Operative throughout 24 hours on Channel 12, Central Port Authority.
TUGS: Available from private company.
MEDICAL: Advance notice not required – all facilities available.
SPECIALISED CARGO HANDLING FACILITIES: The port has silos of capacity 20,000 tons.

AGET Installation: 1 berth for discharging cement in bulk by special constructed ships equipped with automatic discharging gear. Max. draft 30 ft.

CRANES: 36 electrically driven berth cranes of 3–27 tons capacity. 20 mobile cranes of 9–30 tons capacity. 1 floating crane of 70 tons capacity.
TANKERS: 1. *Esso-Pappas installation. (a)* Sea Island berth capable of accommodating 2 vessels of 24,000 tons and 14,000 tons respectively. Max. draft 32 ft. 8 lines, diameter 16 in. (1). 10 in. (3), 4 in. (3), 6 in. (1). *(b)* 7 buoy mooring for vessel of up to 80,000 tons. Max. Draft 44 ft. Submarine 34 in. pipe-line for crude oil discharge. 2 flexible discharge lines 10 in. diameter.

2. *Mamidakis' Installation.* Stern discharge berth. Max. draft 32 ft. 2 submarine lines enable 2 grades of cargo to be discharged through 8 in. line at 200 t.p.h. and 6 in. line at 160 t.p.h.

3. *Ethyl Oil Berth,* length 320 m., depth alongside 10m.

DIRTY BALLAST: 2 tanks of 600 tons each and 1 of 6,000 tons are available for the reception of dirty ballast at Esso-Pappas installation.

The discharge overboard of any oil or oil contaminated water is strictly forbidden and every precaution must be taken to avoid pollution.

DENSITY: 1025.
FRESH WATER: Unlimited supplies available.
FUEL: Unlimited quantities available. Usual notices required. Suppliers B.P., Shell, Esso-Pappas, Mamidakis.
FIRE PRECAUTIONS: Safety tug in position at tanker installations.
DEVELOPMENTS: *(a)* Channel. Dredging in progress to enable any size vessel to enter port. *(b)* Construction of sixth jetty, length 1,000 m., width 600 m. Will be used as a container terminal. Expected to be completed in 1978.
WATCHMEN: If required, cost by private negotiation.
HATCHES: Opened/closed by crew.
CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle spirits allowed out of bond for each Crew member.
CARGO GEAR: Adequate shore gear available.
IDENTIFICATION CARDS: Passes issued to Crew members of foreign vessels.
CONSULS:

U.S.A.
France
Denmark
Italy
S. Africa
Turkey
Austria
Germany
Switzerland
U.K.
Netherlands
Finland
Belgium
Yugoslavia
Japan
Norway
Sweden

REPAIRS: Only minor repairs.
REPATRIATION: Facilities for crew changes and repatriation available.
AIRPORT: Distant 12 km/s. S.E. of town. 6 flights daily to Athens.
TIME: GMT plus 2 hours. Permanent.
HOLIDAYS: (National): 1st January, 6th January, 25th March, Good Friday, Easter Monday, 21st April, 1st May, 15th August, 28th October, Christmas Day, Boxing Day. (Local): 26th October. Work may be arranged on holidays at double costs.
POLICE/AMBULANCE/FIRE: Port Police, tel. 531-502; Ambulance, tel. 531-531; Fire, tel. 199.
TELEPHONES: Facilities available for placing on board.
SHORE LEAVE: Permitted without restriction. For tankers, the Master should arrange transport with Agent for seamen to the landing pier in Thessaloniki Harbour. Seamen will not be permitted to pass through refinery area.
AUTHORITY: Port Authority of Thessaloniki.

VOLOS: 39.21 N. 22.56 E. (See Plan Book)

DOCUMENTS: See Piraeus.
PILOTAGE: Pilot boards about 1 mile outside port. Pilot boat is small launch coloured grey and black.
ANCHORAGE: Suitable anchorage situated 1–2 miles outside harbour in depths of 14 to 20 m.
RESTRICTIONS: Vessels in excess of 10,000 tons unable enter at night.
MAX. SIZE: Max. draft 36 ft., no limitation on length or breadth.
HEALTH: Port Officer acts as Health Officer and pratique effected on doctor's advice. If arriving from another Greek port, pratique automatic.
TUGS: Join vessel at entrance to harbour. 3 tugs, 150 h.p., 240 h.p., 1,080 h.p.
BERTHING:

Dock	*Length*	*Depth*
K	600 m.	8.0 m.
1	1,000 m.	11.0 m.
11	980 m.	11.0 m. (under construction)
R	270 m.	7.0 m. (under construction)

CRANES:

1 Mobile crane	— Capacity 35 tons
3 Mobile cranes	— Capacity 10 tons
3 Crawler cranes	— Capacity 4 tons
1 Rail mounted crane at Dock 1	— Capacity 27 tons at 17 m. and 16 tons at 30 m.
Cranes under construction:	
Dock 1 4 cranes	— Capacity 8 tons at 20 m. and 6 tons at 25 m.
Dock 11 2 cranes	— Same capacity as Dock 1

BULK HANDLING FACILITIES: 2 silos, capacity 15,000 tons, loading ability 370 t.p.h. Discharging ability 250 t.p.h.
STEVEDORES: Advance notice required order arrange gangs. No shore gear and all cargo operations handled with ship's gear.
MEDICAL: Advance notice of required medical attention is necessary. Hospital and medical facilities available.
TANKERS: One berth; depth alongside 27 ft.
FRESH WATER: Only available at main pier and silos pier.
DEVELOPMENTS: New piers under construction.
HATCHES: Usually opened and closed by crew, but if by stevedores, additional costs apply.
CUSTOMS ALLOWANCES: 1 to 2 packets cigarettes allowed per crew member per day. 1 bottle wine/spirits allowed out of bond.
CONSULS: Germany, tel. 25379, France, tel. 25870, Sweden, tel. 27662.
REPAIRS: Minor repairs can be effected.
AIRPORT: Situated at Anchialou. 2 weekly flights to Athens.
TIME: GMT plus 2 hours, Winter. GMT plus 3 hrs. in Summer.
HOLIDAYS: Usual Greek holidays. Local holiday 6th December; cargo work can be arranged subject to additional cost with the exception of 6th December.
POLICE/AMBULANCE/FIRE: Police, tel. 24500; Ambulance, tel. 27531; Fire, tel. 5000.
SHIPMASTER'S REPORT: 1977.

Restrictions: Draft restrictions on new quays subject to maximum depth of water of 32 ft. and on the original town quays a maximum depth of water of 28 ft. East side, 26 ft. West side, 24 ft. Head. (Thus draft will have to be about 2 ft. less than depth.)

Stevedores: Working hours 0730 – 1400 hrs. and 1400 – 2100 hrs. on overtime.

Berths: Town quay with approx. 750 ft. frontage on each side and cross berth approx. 385 ft. on end. New 'L' shaped berths with base to the shore with approx. 1,525 ft. East, 1,230 ft. West, 500 ft. End of frontage on South side, 500 ft. on end, two of approx. 500 ft. on inside of L.

Pollution: Port regulations prohibit the scraping and scaling of ships side and the pollution of sea or port area by painting.

AUTHORITY: Port Authority of Volos.

YALI ISLAND: 36.38 N. 27.07 E. (See Plan Book)

DOCUMENTS:

2 Crew Lists.
2 Passenger Lists.
Cargo Manifest.
Bills of Lading.
List of Ship's stores and Spares.
Health Declaration.
Ship's Certificates.

PILOTAGE: A Mooring Master is available from Piraeus. Mooring Master boards at the anchorage.

ANCHORAGE: Safe anchorage in the roads except in strong Southerly winds.

MAX. SIZE: Length 250 m., draft 33 ft.

HEALTH: Port authorities will board by launch from Nissyros to arrange free pratique. Any sick crew members will be disembarked to Nissyros by the same launch.

TUGS: Not available.

BERTHING: The vessel is moored at loading berth on 8 buoys in addition to port anchor. During loading operations the vessels have to be shifted from hatch to hatch.

The facilities of loading consist of a cement pylon holding a horizontal chute-conveyor belt of about 50 ft. length. This chute-conveyor belt is fed from ashore by rotating buckets of 1.3 tons each. The vessel has to be at a distance of about 40 to 50 ft. from the cement pylon in order to load the holds.

STEVEDORES: Workers are employed by private loading company.

MEDICAL: Nearest medical and hospital facilities are at the island of Kos, 7 miles north of Yali.

FRESH WATER: None available.

FUEL: Not available.

HATCHES: Opened and closed by ship's crew.

CUSTOMS ALLOWANCES: 200 cigarettes and 1 opened bottle of spirits are allowed each man.

CONSULS: No local representation.

REPAIRS: No facilities exist.

AIRPORT: Nearest at Kos with daily flights to Athens during the Summer. 4 flights a week during the Winter.

HOLIDAYS: Do not affect vessels loading.

SHORE LEAVE: Allowed.

AUTHORITY: Clerk of Mandraki, Port of Nissyros. Yali Quarry Manager.

NOTES

Please also advise Shipping Guides Ltd.

Greenland

GENERAL:

CUSTOMS: The Master is not allowed to distribute tax-free cigarettes or other tax-free tobacco in a Greenland port.

DOCUMENTS: Following documents must be on board:

Speed Certificate.
Crew List.
Radio Station Certificate.
Safety Equipment Certificate.
Clearance Certificate.
Health Declaration.
Tonnage Certificate.
Certificate of Registry.
Deratisation Certificate.
Sailing Orders.

RESTRICTIONS: Foreign-flag vessels do not normally have access to Greenland ports unless they have special permission. If such vessels have this permission, the crew may go ashore subject approval of Port Authorities and following presentation of Health Certificate or a medical check on board.

ICE INFORMATION: Ice Centre Narssarssuaq is transmitting daily at 1200 hrs. GMT and 2200 hrs. GMT the latest information of the ice in Southern Greenland Waters. Information is transmitted in Faximile (Mufax) on frequency 2780 and 6970 kc/s drum speed 120. Ships can, free of charge, request telegraphic ice information from following coastal radio stations:

OZL—Angmagssalik
OZN—Prins Christian Sound
OXF—Julianehab
OZA—Frederikshab.

WATCHMEN: Ship is required to appoint a crew member as ship's guard on board.

TIME: GMT minus 3 hours. Permanent.

HOLIDAYS: As applicable to Denmark.

CONSULS: None.

WORKING HOURS: Normally from 0600 hrs. to 1800 hrs. with 2 meal breaks.

RADIO: In ports where there is a local radio station, vessels are prohibited from using ship's station for sending messages.

HEALTH: Before commencing voyage to Greenland, at the port of departure, Master is required to obtain a Health Certificate from an authorised medical practitioner, stating that there are no dangerous or contagious diseases on board, such as pest, cholera, yellow-fever, smallpox, or typhus. The crew list is to be included in this certificate stating that there are no venereal or other contagious diseases amongst the crew members. The Health Certificate is only valid if it has the stamp and signature of the Royal Danish Consul or Vice-Consul of the district in which the port of departure is situated. On arrival at the first Greenlandic port, the Master is to present the Health Certificate to the Port Authorities. Health Certificate may also be issued by a doctor in the first Greenland port of call.

REPORT: Immediately upon arrival of a vessel in Greenland, the Master must report to the Port Authorities.

WASTE DISPOSAL: It is forbidden to throw waste material of any description overboard into port waters.

EGEDESMINDE: 68.43 N. 52.53 W.

(Also see "General Information" at beginning of Greenland Section)

DESCRIPTION: Roadstead, Inner Port (inside Bay), Anchorage, Boat Port, and Atlantic quay.

DAYLIGHT: Polar darkness from 2nd December to 11th January, and midnight sun from 22nd May to 23rd July.

CONDITIONS: *(a)* Current: flows Eastwards between the islands at Egedesminde from 3 hours before, to 3 hours after high water, following which, current flows Westwards for 6 hours. *(b)* Ice: Winter ice normally occurs from mid-December to early May, but can occur earlier, in November. New ice in the port can be up to 60 cm thick; 1st January covering ice up to 30 cm and by 1st February about 45 cm. Icebergs sometimes enter port area and stop all shipping movement. *(c)* Tide: high tide height 2.6 m. (max. 3.1 m.). Low tide height 1.5 m. Direct West wind causes 0.3 m. rise above tidal height, and South or S.E. wind about 0.5 m. below.

PILOTAGE: No official port Pilot, but assistance arriving and sailing may be obtained from a local seafarer having good knowledge of the area. This local assistance should be ordered if required in ETA cable to Port Authority at least 24 hours prior arrival. The Port Manager usually acts as local expert as part of his normal duties.

There is VHF radio installation in office of Port Authority and it is usually possible to obtain VHF contact within 30 miles of Egedesminde.

Local area expert will board vessel from port boat at meeting place usually arranged just outside entrance to port.

No special pilotage regulations and no Outer Anchorage where Pilot may be taken on board. However, in waters North and N.E. of port entrance vessels may stop or proceed at very slow speed in order to embark local expert.

ANCHORAGES: No special anchorages, and vessel is only allowed to anchor for a short period at the entrance to port subject permission of Port Authority.

MAX. SIZE: Largest vessel to berth alongside Atlantic quay was length 136 m., breadth 20 m., draft 6.2 m.

ENTRY: Day or night.

TUGS: None. 2 port boats to take lines and assist mooring.

RADIO: Godhavn Radio. RDF station beacon East of the town. Radio link between Egedesminde and Transitoen, and between Transitoen and Roeveo.

BERTHING: Atlantic quay. Length 70m., depth alongside 8.1 m., at medium low tide and 10.7 m., at medium high tide. Height of quay at medium tide about 1.5 m., above w/l. One 5-ton mobile crane and some fork-lift trucks used in discharging.

MEDICAL: Hospital, doctor and dentist available.

FRESH WATER: Available at Atlantic quay and at tank-station.

FUEL: Only gas-oil available for local fishing vessels from the tank-station.

REPAIRS: Minor repairs possible. Slip for small vessels (250 tons).

AIRPORT: Heliport.

SALVAGE: Salvage-station in the area.

SERVICES: Radar and radio technicians available.

AUTHORITY: Director of Commerce.

FAERINGEHAVN: 63.41 N. 51.34 W.

(Also see "General Information" at beginning of Greenland Section).

DOCUMENTS: Bill of Health: Doctor's certificate mentioning each member of crew by name to be free of contagious diseases. This document to be signed by Consulate in the port of delivery to be prepared by competent authority, passengers excluded. One Manifest with Bill of Lading. Ordinary Ship's Papers.

PILOTAGE: As a rule Pilot can be ordered in the months May–October, notice 12 hours before arrival is required.

ANCHORAGE: Inside fjord area.

RESTRICTIONS: None.

MAX. SIZE: Oil-carriers about 26,000 d.w.t., draft 40 ft. Ordinary cargo-ships 20 ft.

HEALTH: Captain to apply with documents at harbour office for free pratique.

RADIO: Faeringehavn Radio: OYU, or Godthab Radio: OXI, connected Faeringehavn by Telex and Telephone.

VHF: Oil company and fishing company are listening on VHF during working hours.

TUGS: Salvage tug stationed on West coast of Greenland. Stationed at Faeringehavn May–October, no fixed rates.

BERTHING: Natural port, anchorage for the largest vessels. Wharf, 225 m. with 5 m. at L.W.

STEVEDORES: None, but fishing and service company "Nordafar" may act as stevedores.

MEDICAL: Local sick room and nurse available in Summer. For medical service, apply Godthab.

TANKERS: Load/discharge lines 6 and 8 in. Smaller diameters for bunkering when necessary.

FRESH WATER: Only available May to November.

FUEL: Available. Light fuel, gas oil, aviation turbine fuel A1, gas oil, oct. 97.

GANGWAY/DECK WATCHMEN: Not required (ship's crew).

OPENING/CLOSING HATCHES: Must be carried out by ship's crew.

IDENTIFICATION CARDS: Not required.

CONSULS: None.

REPAIRS: Small repairs only. Workshop available May to November.

REPATRIATION: Available, via Godthab by air to Copenhagen.

AIRPORT: Nearest airport is Godthab, distance 35 miles regular airlines.

TIME: GMT minus 3 hours.

HOLIDAYS: Danish holidays.

POLICE/AMBULANCE/FIRE: Police tel. Faeringehavn 34; Ambulance Faeringehavn 25.

TELEPHONES: Not available on board.

GENERAL: Bunker station open all year; during Winter-time sometimes difficulties caused by ice.

SHORE LEAVE: Allowed.

DELAYS: Bunker station closes for arrivals between 2200 hrs. and 0600 hrs. local time.

AUTHORITY: Kontrolloren, (Harbour Master).

FREDERIKSHAB: 61.59.7 N. 49.40.8 W.

(Also see "General Information" at beginning of Greenland Section)

LOCATION: The port is in the inner part of a small bay.

DESCRIPTION: Atlantic quay; fishing quay; anchorage.

CONDITIONS: *(a)* Current: none. *(b)* Ice: big ice reaches to the North of the port; smaller ice reaches the port especially to the North, but South of the port it is usually ice-free. The best period of finding the port ice-free is between March and April, and from the end of August. *(c)* Tide: height of average high water is 3.8 m., low water 2.0 m. (max. 2.4 m).

PILOTAGE: Pilot should be requested in ETA cable via Frederikshab radio. Pilot will meet vessel at Satuarssugssuaq (Fyroen).

ANCHORAGE: S.E. of Skarvo. Holding ground is not good and anchoring should be carried out at very slow speed.

MAX. SIZE: Length 100 m., draft about 6 m.
ENTRY: Day or night.
TUGS: None. Port boats assist in mooring.
RADIO: Local radio station. RDF station beacon East of the town.
BERTHING: Atlantic quay. Length 90 m., depth alongside at average low tide, 7 m., depth in harbour about 10 m. Cranes up to 5 tons capacity and fork-lifts trucks used in discharging.
MEDICAL: Hospital, doctor and dentist available.
FRESH WATER: Available alongside Atlantic quay.
FUEL: Refuelling quay, depth about 5 m., Gas-oil and diesel oil available.
AIRPORT: Heliport.
REPAIRS: Workshop for minor repairs available. Slip for small vessels (250 tons).
GENERAL: Police Station, Fire Brigade, radar and radio technicians, and service for IFD rubber dinghies: Cable address "Fladeservice FRH".
AUTHORITY: Director of Commerce.

GODHAVN: 66.56 N. 53.40 W.

(Also see "General Information" at beginning of Greenland Section)
DESCRIPTION: Port consists of a mooring inside a bay.
DAYLIGHT: Polar darkness from 25th November to 15th January, and midnight sun between 19th May and 26th July.
CONDITIONS: Ice: Winter ice is fast from November–December until end May or beginning of June. Thickest observed Winter ice is about 100 cm.
ENTRY: Day or night. Port is open from May to November. Between mid-April until May the port can only be used by specialised tonnage.
PILOTAGE: Boarding point arranged with Port Authority in ETA advices.
ANCHORAGE: Good anchorage in the bay – outer port.
MAX. SIZE: Largest vessel to date length 100 m., draft 6.5 m.
TUGS: None. Port boats assist with mooring.
RADIO: Local radio station. RDF Station beacon.
BERTHING: Quay length 12 m. depth alongside 4.0 m. at MLWS. Vessel moors to 2 anchors and stern-lines to the shore. Mobile cranes on shore capacity up to 5 tons. Depths in bay about 6.82 m.
MEDICAL: Hospital. Doctors and dentist available.
GENERAL: Arctic Scientific Station, Fire Brigade, Cable Office.
AUTHORITY: Director of Commerce.

GODTHAB: 64.10 N. 51.44 W.

(Also see "General Information" at beginning of Greenland Section)
DESCRIPTION: Narrow entry to port, but well protected, with good modern berths and anchorages.
CONDITIONS: *(a)* Current: sometimes strong between anchorage and the berths. *(b)* Ice: only very occasional large quantities of ice reach the port and into the fjord. If ice in area South of Godthab, S.W. storms force drift ice into the fjord. In recent years the port has begun to freeze over in Winter, and small vessels have at times become icebound. *(c)* Wind: S. and S.W. storms spring up suddenly but only last for brief periods. *(d)* Tide: height of high water 4.4 m. (max. 5.1 m.); low water 2.1 m.
ENTRY: Port open day and night all year round.
DAYLIGHT: Godthab situated South of the border for midnight sun and Polar darkness.
PILOTAGE: Port Manager normally acts as Pilot for ships, but is not an authorised Pilot. Pilotage may be arranged by VHF contact with Authority during normal working hours.
ANCHORAGES: Good anchorages available inside fjord. Larger vessels should anchor close to Rypeo and in Malene Bugt.
MAX. SIZE: Largest vessel to berth at Atlantic quay was length 135 m., breadth 17 m., and draft 7 m.
TUGS: None. 2 port boats to take lines and assist mooring.
RADIO: 24 hours notice of ETA should be passed to Authority, cable address "Handelschefen Gothab". Radio beacon at Kookoerne.
BERTHING: Larger vessels should contact Port Authority before approaching port at night-time. Atlantic quay, length 170 m., has a depth alongside 7 m., approx. for the most Northerly 120 m., and between 4.5 – 5 m. at MLWS for the most Southerly 50 m.

Vessels normally berth starboard side alongside, unless fitted with bow thrusters, when a port side berthing is feasible. Mobile cranes capacity 5 tons.

Schooner Quay is 52 m. long, with a depth of 4.7 m., approx. Vessels normally berth bow Westward.

On the Coastal Passenger Quay length 30 m., depth 5.4 m., vessels usually berth with bow to the North.

There are several other small quays for the use of trawlers, and cutters, and a sand discharging berth length 30 m., depth 5 m.
TANKERS: Tankers can anchor and stern moor out from the gas installations, using an oil pipe-line connection. A mooring arrangement has been established for tankers of 25,000 – 30,000 d.w.t. below the tank and gas farm on the hillside.
MEDICAL: Hospital, doctors and dentists available.
FRESH WATER: Available at Atlantic quay.
FUEL: Small quantities gas-oil available at Atlantic quay.
REPAIRS: Slip for small vessels (40 tons) and minor repairs. Slip for vessels up to 1,860 tons, repairs possible.
AIRPORT: Heliport.
GENERAL: Police, Fire Brigade, radar and radio technicians, radio station post, and cable office.
AUTHORITY: Director of Commerce who also acts as Port Manager.

HOLSTEINSBORG: 66.56 N. 53.40 W.

(Also see "General Information" at beginning of Greenland Section)
LOCATION: Harbour is situated on Northern side of Tommermandsoen.
CONDITIONS: *(a)* Tide: average height of high tide 3.5 m. (max. 4.4 m). low tide 2 m. *(b)* Ice: Winter ice up to 1 m. thick. Ice normally occurs from December to March or April.
ENTRY: Port open day and night, and normally all year round.
PILOTAGE: Arrange with Authority through Holsteinsborg's radio, cable address "Director of Commerce Holsteinsborg". Pilot meets vessel at Jakobs Skaer, 2 miles S.W. of Mollersoe.
ANCHORAGE: Large vessels can anchor outside port and discharge into barges.
MAX. SIZE: Largest vessel that can berth alongside Atlantic quay, length 136 m., breadth 20 m., draft 6.2 m.
TUGS: None. Port boats take lines and assist mooring.
RADIO: Local radio station. VHF connection in Port Director's office. Radio technicians available, cable address "Polar Radio".
BERTHING: Atlantic quay, length 60 m., depth alongside 6 m., at average low water. Height of quay 2 m. above w/l. If berth occupied, loading/discharging of larger vessels at anchorage with barges. At Atlantic quay there is a mobile crane with capacity of 3 tons and fork-lift trucks. Belt conveyor for coal.

Offshore Quay: Length 20 m. with depth of 6 m. at LW.
MEDICAL: Hospital, doctors and dentists available.
FRESH WATER: Obtainable at Atlantic quay.
REPAIRS: Slip for small vessels (250 tons) and minor repairs.
AIRPORT: Heliport.
GENERAL: Post and cable offices. Telephones not normally available for connection on board, but vessels at anchor can call Port Director's office on VHF during daytime.
AUTHORITY: Director of Commerce who acts as Port Master and Harbour Master.

IVIGTUT: 61.12 N. 48.10 W.

(Also see "General Information" at beginning of Greenland Section)
OPERATORS: A/S Kryolitselskabet Oresund.
CONDITIONS: *(a)* Current: strongest about 3 hours before and 3 hours after high water, and vessels arriving and sailing should take this into consideration. *(b)* Tide: height of average high tide 3 m. (max. 3.4 m.), low tide 1.6 m. *(c)* Wind: calm for about half the year otherwise winds are usually from South or S.E. The dangerous winds for moored ships are the infrequent storms from North or N.E.; these storms seldom occur but if they do occur they do so in the Autumn. *(d)* Ice: Winter ice usually occurs from December onwards in the fjord outside Ivigtut and disappears in the beginning of April. Outside Ivigtut Winter ice always occurs, sometimes reaching a thickness of about 1 m. Information concerning ice conditions always obtainable on telegraphic request to GLK.
ENTRY: Day and night and usually all year round.
PILOTAGE: No official Pilot but an acting Pilot can be arranged through connection with Port Authority, cable address "Manager Ivigtut", at least 24 hours prior arrival.
MAX. SIZE: Largest vessel to have berthed at Kryolit pier was length 102 m., breadth 14 m., draft 6.2 m.
TUGS: None. Motor-boat will assist mooring.
BERTHING: Kryolit quay, depth alongside about 7 m. height of pier about 2 m. above w/l. Berthing during daylight only. Kryolit not exported from mid-December to end March. Crane capacity 3 tons.
RADIO: The radio station at Ivigtut is closed but telephone connection to radio station at Gronnedal.
FRESH WATER: Available.
FUEL: Deliveries of small quantities of gas-oil.
REPAIRS: Machine tool workshop. Diver assistance obtainable.
MEDICAL: Hospital in Ivigtut, but doctors and dentists are in Gronnedal.
AUTHORITY: Ivigtut Cryolite Mines.

JAKOBSHAVN: 69.13 N. 51.06 W.

(Also see "General Information" at beginning of Greenland Section)

DESCRIPTION: Port is a narrow open bay, entrance to the N.W., having outer port and inner port. In outer port is Atlantic quay and bunkering station, and inner port has another quay and a fishing harbour.
CONDITIONS: *(a)* Tide: height of average high tide 2.8 m. (max. 3.3 m.) low tide 1.6 m. *(b)* Wind: usually East to N.E. In Autumn winds are strong especially in the morning. *(c)* Ice: impression can be gained when approaching port that port is closed due to icebergs. On closer approach channels between icebergs will be found but if these openings appear too narrow a wider passage should always be found to the North. *(d)* "Kanele": a natural phenomenon that occurs at this port causing regular and heavy swell, height up to 2 m. Wave characteristic, long and flat, frequency about 6 minutes. Pilot should be consulted for full information.
ENTRY: Port usually open day and night, from mid May to end November.
DAYLIGHT: Polar darkness between 1st December and 12th January and midnight sun between 21st May and 24th July.
PILOTAGE: A Pilot should always be used by larger vessels and request made to Port Authority in ETA cable. Pilot boarding place to be agreed with Authority.
MAX. SIZE: Largest vessel to berth at Atlantic quay was length 93 m., draft 6.8 m.
TUGS: None. Port boats take lines and assist mooring.
BERTHING: Outer port depth 6.5/7 m., inner port 5.5/6 m. Atlantic quay length 40 m. Depth alongside Atlantic quay 7 m. at average low tide. Height of quay about 1.1 m. above w/l. Permission to enter port should be obtained prior arrival from Port Authority. Mobile crane capacity 5 tons, also fork-lift trucks.
MEDICAL: Hospital, doctors and dentists available.
FRESH WATER: Obtainable alongside Atlantic quay.
AIRPORT: Heliport.
REPAIRS: Machine workshop. Crane for lifting small vessels, capacity 50 tons.
GENERAL: Police, Fire Brigade, Port and cable office.
AUTHORITY: Director of Commerce who acts as Port Manager.

JULIANEHAB: 60.43 N. 46.02 W.

(Also see "General Information" at beginning of Greenland Section)

DESCRIPTION: Port is an open bay, facing South with Atlantic quay.
CONDITIONS: *(a)* Current: flows N.W., but in Southern part of port from little current effect. *(b)* Tide: average height of high tide 2.8 m. (max. 3.2 m.); low tide 1.4 m. *(c)* Ice: drift ice between January and July occasionally fills whole port. *(d)* Wind: the most frequent wind is from East or N.E., normally occurring as storms during Winter months and as strong winds in Summer. Winds can be violent and cause rapid rise in temperature. Very secure moorings are advisable.
PILOTAGE: Port office is equipped with VHF which should always be used to contact Port Authorities before arrival, and to arrange Pilot's boarding position.
MAX. SIZE: Largest vessel to berth at Atlantic quay was length 100 m. and draft 6 m.
ENTRY: Port open day and night normally throughout year, but from 1st January to 1st August, only available to specially constructed tonnage.
TUGS: None. Port boats take lines and assist mooring.
RADIO: Local radio station. Radio beacon station at Simiutaq about 10 miles West of entrance to Julianehab Fjord.
BERTHING: Atlantic quay – length 60 m., depth alongside between 7/9 m. on average high tide and 1 quay, length 60 m., depth alongside 4.8–7.2 m. for small vessels. Height of quay is 1.3 m. above w/l. Mobile cranes, lifting capacity up to 5 tons.
MEDICAL: Hospital, doctor and dentist available.
FRESH WATER: Available from Atlantic pier during Summer months.
FUEL: Gas-oil available at Atlantic pier.
REPAIRS: At repair quay there is a stationary crane lifting capacity 35 tons. Slip for small vessels (250 tons) and minor repairs.
AIRPORT: Heliport.
AUTHORITY: Director of Commerce – acting as Port Manager.

MARMORILIK: 71.07 N. 51.17 W. (See Plan Book)

DOCUMENTS:
International Load Line Certificate.
Safety Raid Certificate.
PILOTAGE: Optional for coastal vessels entering Davis Strait. Agents are to make arrangements if Pilot required.
GENERAL DESCRIPTION: The berth is located at the North end of the West side of Agfardlikavsa Fjord.

Agfardlikavsa Fjord, West Greenland, (entrance approximately 51° 18′ W. and 71° 08′ N.) is located at the end of the larger Qaumarujuk Fjord.

Qaumarujuk Fjord, the Northeastern arm of Ingnerit, has its entrance between Qegertanguit and the Western extremity of Akuliarusikavsak, a mainland projection about 2.5 nautical miles S.E. Ingnerit is one of the largest of the branch fjords and flows into Umanak Fjord. It is entered between Tuperssuatsiait, the S.E. extremity of the Alfred Wegener Peninsula, and Akuliaruseq, a point about 4 miles S.S.E. The waters of the Umanak Fjord flow into the Nordost Bay.

The Agfardlikavsa Fjord is separated from the Qaumarujuk Fjord by a shallow, narrow bar. Depth at the centre of the sill is approximately 30 m.

There is a considerable surface water run-off along the Fjord walls including occasional rock slides. The bottom of the Fjord is filled with 6 to 8ft. of fine silty materal.

Marmorilik (71° 08′ N., 51° 18′ W.) lies on the S.E. side of the Qaumarujuk Fjord at the Western entrance point of the Agfardlikavsa Fjord.

The larger fjords and Nordost Bay are encumbered with islets and rocks requiring extreme care in navigation. In particular, a shoal is known to exist some 350 m. N.W. of Marmorilik Point and extra care is required in this vicinity.
ANCHORAGE: There is an anchorage at Agfordlikowsa in depths of 20 to 35 m. Tankers can anchor near the berth in depths of 24 to 50 m., but must be aware of an unmarked 6m. shoal about 300°True, and 375 m. (approx.) from the discharge point.
MAX. SIZE: Max. d.w.t. 36,500. Min. depth alongside ore terminal is 12.5 m. at LW.
RADIO: Ship-to-shore communications will be maintained using the following frequencies: 2182 kHz, 2210 kHz and 2738 kHz.

Information on ice conditions in the fjord can be obtained from shore personnel. During loading operations, Greenex will supply the vessel with 2 portable radio transceivers for communications between the carrier and the loading control station.
TUGS: 1 tug available, 720 h.p. The tug will assist with berthing and unberthing if required, and will break up any thin ice in the vicinity of the berth and entrance to the fjord.
BERTHING: The Marine Terminal is used for loading ore carriers up to 36,500 d.w.t. The berth consists of 4 breasting dolphins with bollards for springs and breast-lines. On the shore are 7 bollards for head and stern lines spread over a distance of 366 m. The min. depth of water alongside is 12.5 m. at LW.

Vessels normally berth port-side alongside and use the starboard anchor to assist in berthing. No. 1 hatch is lined up under the loader as it is the first hatch to be loaded.

Initially the headlines go to the Northernmost dolphin and stern lines to the Southernmost bollard on the shore.

Loading: Zinc and lead are loaded with a luffing and slewing ship-loader. The ship-loader is fitted with a 20 ft. conveyor to distribute the cargo in the hold. Communication is maintained between the vessel and control room by portable radios. The average loading rate is 500 metric t.p.h.

Notice of readiness will not be accepted at time of arrival at the dock unless the vessel is in all respects ready to load.

General Cargo: Unloaded into barges with vessel's gear and towed ashore to a separate lightering dock located about 500 m. N.E. of the ore terminal.
MEDICAL: Emergency medical and dental treatment can be arranged and should, when possible, be requested by the vessel's Master in his ETA message to the mine site office.
TANKERS: Diesel fuel oil and turbo-fuel are stored in a tank farm located on-shore about 500 m. West of the point at Marmorilik on Qaumarujuk Fjord, at an elevation of 50 m.

Vessels usually berth using both anchors, 5 shackles on the port anchor, and about 4.5 shackles on the starboard anchor, using a heavy chain from the stern to the S.E. point of the oil installation. The chain is available from the shore. Tankers can also moor to the N.N.W. of the oil installation, but must remain outside the 6 m. line.

The tanker hoses are connected to an 8-inch flange connection for diesel oil or a 4-inch hose adaptor with dust-cap for turbo-fuel. The static head on the lines is about 70 m when the tanks are full. An anti-static cable is provided.

On the shore, there are two 50-ton bollards and one 20-ton stock. No breasting or mooring dolphins are provided.
FRESH WATER: Not available.
FUEL: Not available.
REPAIRS: No facilities.
TIME: Standard time is GMT minus 3 hours.
GENERAL: *Repairs:* While alongside the dock, no repairs are to be undertaken that will prevent the main propulsion machinery from being activated at very short notice.

Vessel's Whistle: The vessel's whistle shall be operational during operations. One long blast on the whistle means "Emergency – stop operations".
AUTHORITY: Greenex A/S.

NARSSARSSUAQ (Isrecognosceringsstation): 61.08 N. 45.26 W.

(Also see "General Information" at beginning of Greenland Section)

DESCRIPTION: Ice outlook station, with quay.
CONDITIONS: *(a)* Current: occasional strong N.W. current. *(b)* Tide: average height of high water 3 m. (max. 3.6 m.) low water 1.6 m. *(c)* Wind: S.E. wind sometimes reaches typhoon strength. *(d)* Ice: in Winter ice thickness sometimes reaches 1 m. Ice breaker not available.
PILOTAGE: Not available. Base representative should be advised of ETA well in advance of arrival.
TUGS: None. Port boats assist mooring.

MAX. SIZE: Largest vessel to berth at quay was length 130 m., draft 8 m.
ENTRY: Open season from mid-May to mid-October. During season, port open day and night.
BERTHING: Quay length 140 m., depth alongside (West) 6–11 m. (East) 5–8 m. Height of pier 2 m. above w/l. 2 vessels may berth, 1 on either side of quay. Heavy mooring equipment on the quay, and should be used by larger vessels. Mobile cranes capacity up to 4 tons, and fork-lift trucks.
WATER: Obtainable at quay, about 80 tons per single off-take.
AIRPORT: Landing-strip for aircraft. Ice station usually uses DC.4 aircraft and S61 Helicopter.
RADIO: Local radio station supplying ice information.
AUTHORITY: Representative of Ministry for Greenland.

NORTH STAR BUGT (Thule Air Force Base): 76.36 N. 68.52 W.

(Also see "General Information" at beginning of Greenland Section)
DESCRIPTION: Supply port for the Thule Air Force Base. Port is operated by and belongs to the U.S. Air Force.
DAYLIGHT: Polar darkness from 1st November to 10th February and midnight sun from 23rd April to 20th August.
CONDITIONS: *(a)* Ice: port is frozen over from end October to beginning July. From beginning of November, large areas of compact ice appear, and these can sometimes be up to 20 miles wide. During May, compact ice areas commence breaking up; however, large quantities of drift ice remain along the coast until end July. Winter ice is normally about 180 cm. thick. *(b)* Temperature: in January and February average temperature is 29° below zero. In July, June and August, average temperature is usually above freezing-point, but for the rest of the year it is below freezing. *(c)* Tide: mean Spring tide is 3 m. (max. 3.4 m.). Mean neaptide 1.7 m.
ENTRY: Normally, port is open early July depending upon ice situation.
PILOTAGE: No authorised Pilot, but American Port Authority assists in mooring and should be advised of ETA well in advance.
TUGS: None. Port boats assist mooring.
ANCHORAGE: Good holding ground in depth between 20 and 40 m., but anchoring should only be carried out following advice of Port Authority.
MAX. SIZE: Largest vessel to berth alongside quay was length 130 m., and draft 7 m.
BERTHING: 2 vessels may berth at the quay. Depth alongside about 7 m. Height of pier about 2 m. above MHW. Mobile cranes and fork-lift trucks; however, equipment varies from year to year and Port Authorities should be contacted well in advance. 3 amphibious craft for vessels discharging in the roadstead.
FRESH WATER: Available alongside quay.
AIRPORT: Two rescue helicopters stationed at this base.
REGULATIONS: The area is a Military Defence area and special permission is necessary to enter the port. Shore leave is prohibited.
MEDICAL: Hospital, doctor and dentist available.
AUTHORITY: U.S. Air Force.

SONDRE STROMFJORD (Camp Lloyd): 66.00 N. 53.35 W.

(Also see "General Information" at beginning of Greenland Section)
DESCRIPTION: Port is used for the supply of an American base, transit port for passenger carriage, and for air communication to Copenhagen. Port has a quay and a sea terminal for tankers.
DAYLIGHT: Camp Lloyd is situated South of the border for polar darkness but has a midnight sun from 15th June to 1st July.
CONDITIONS: *(a)* Current: the current at entrance and at the West of Sondre Stromfjord is N.E. at flood tide, and S.W. at ebb tide, and can reach a speed of 7 knots. *(b)* Tide: high water at Camp Lloyd is about 3 hours later than at the entrance of Sondre Stromfjord. Height of average high tide 3 m. (max. 3.6 m.). Low tide 1.6 m. *(c)* Ice: Sondre Stromfjord is frozen during winter throughout whole of inner harbour, but about 55 miles from Camp Lloyd, ice thickness varies from 5 cm to 90 cm. *(d)* Winds: strong winds can occur from East and S.E.
ENTRY: On account of ice, the fjord is closed from beginning of January to end-June, but can be used day or night from beginning of July to end-October.
PILOTAGE: No authorised Pilot, but Harbour Master will assist berthing.
ANCHORAGES: Good anchorages about 2 miles S.E. of Emmons Pynt in depth of about 40 m. Great care should be taken in anchoring, since sea bottom is shelving.
BERTHING: *(a)* A quay which is located North of Emmons Pynt, depth alongside only 3 m. *(b)* Tanker sea terminal about 700 m. S.S.E. of Emmons Pynt where there is mooring with discharge lines. Depth of water 24–26 m. on the South side of the mooring position; 15 m. at the mooring, and 10 m. on Northern side of mooring with rapid shelving to the North.

The Port Authorities should be contacted before mooring at the sea terminal. There are mobile cranes with lifting capacity up to 5 tons, and fork-lift trucks.

RADIO: ETA should be given well in advance of arrival to the Royal Greenlandic Commercial Representative and also to the Port Authority. The arrival should be reported at least 24 hours in advance through GLK. The Harbour Master can be contacted on 2716 kc/s. and this contact should be established at least 1 hour before vessels arrival.
MEDICAL: Hospital, doctor and dentist available.
REGULATIONS: Camp Lloyd is an American Defence Area and is restricted. American supply ships have preference in mooring at all installations.
AIRPORT: Heliport.
AUTHORITY: The Royal Greenlandic Commercial Representative – Harbour Master.

SUKKERTOPPEN: 65.25 N. 52.54 W.

(Also see "General Information" at beginning of Greenland Section)
LOCATION: Harbour situated on S.E. side of Manitsoq island, and has Atlantic quay.
CONDITIONS: *(a)* Tide: height of average high water 4.2 m. (max. 4.8 m.), low water 2 m. *(b)* Ice: Winter ice occurs from December to April. *(c)* Wind: advisable not to enter harbour area if winds are strong. Most obstructive winds are storms from South or S.W.
ENTRY: Port open day and night, normally all year round.
PILOTAGE: Pilot is arranged by cable to Sukkertoppen radio when giving ETA, which should be sent well in advance. Pilot will meet vessel as arranged outside the harbour, or at Faltings Skoer.
TUGS: None. Port motor-boats assist mooring.
MAX. SIZE: Largest vessel that can berth at Atlantic quay is length 100 m., draft 6 m. Vessels up to 4,000 tons have used the port.
BERTHING: Depth in harbour is about 27 m. and alongside Atlantic quay. Length 60 m. with depth of about 6.2 m. Height of quay is about 2 m. above w/l. Cranes up to 5 tons capacity and fork-lift trucks.
WATER: Available at quay.
REPAIRS: Repair workshop for minor repairs. Slip for small vessels (250 tons) and minor repairs.
MEDICAL: Hospitals, doctors and dentist available.
AIRPORT: Heliport.
GENERAL: Telex, telephones, Police, Fire Brigade.
AUTHORITY: Director of Commerce.

NOTES

Please also advise Shipping Guides Ltd.

Guatemala

CHAMPERICO: 91.55 W. 14.17 N.

DOCUMENTS:
Clearance from Last Port.
Travel Memorondum (original and 4 copies).
Declaration of Maritime Health.
Exemption Certificate of Deratisation.
5 Crew Lists.
5 Passenger Lists or "no passengers" Declaration.
5 Provision Lists.
5 Dangerous Cargo, inflammable or explosives, declaration,
5 Mail Lists or "no Mail" Declaration.
Manifests of Cargo from each port (original and 11 copies).
Bills of Lading from each port.
Vaccination Certificates for whole crew.
12 Ballast Manifests, if no cargo on board.

PILOTAGE: None.
ANCHORAGES: Without limit but recommended *not to anchor* less than 1 km. from beach.
MAX. SIZE: Vessels work cargo at anchorage in depth consistent with vessel's draft.
HEALTH: Give notice of any suspicious illness or fever on board when the doctor comes for official visit.
RADIO: ETA cables through Cristobal CZ.
TUGS: No tugs required.
STEVEDORES: No advance notice necessary. Possible to arrange gangs within an hour.
MEDICAL: Adequate advance notice required depending on gravity of case. Hospital half an hour away and possible to arrange transport for patient, also to arrange for doctor on board. Crew must have current International Vaccination Certificates.
TANKERS: No facilities for tankers.
DENSITY: Changes from 1.0226 gr./cu.cm. in October to 1.0270 gr./cu.cm. in April. Percentage of salt: Changes from 30.5 parts per thousand in October to 36.4 parts per thousand in April. Temperatures: an annual average of 28.5° C.
FRESH WATER: Free within port limits.
FUEL: No facilities.
DEVELOPMENTS: Project to build a modern port with an entrance channel, artificial bay and capacity for 8 merchant vessels and facilities for fishing ships and tourist ships.
GANGWAY/DECK WATCHMEN: When requested cost 5 dollars per person per day.
OPENING/CLOSING HATCHES: Either by crew or by stevedores.
CUSTOMS ALLOWANCES: Without limit on board. Prohibited to take tobacco, wine or spirits ashore.
CARGO GEAR: Ship's gear used for loading/discharging.
IDENTIFICATION CARDS: Not needed.
CONSULS: None.
REPAIRS: Minor repairs only.
REPATRIATION: All facilities available.
AIRPORT: International airport 3 hours distant with regular airlines all over world.
TIME: GMT minus 6 hours. No alterations to clock during year.
HOLIDAYS: No work on 1st January, Maundy Thursday and Good Friday, 1st May and 25th December. The rest of the year work day and night.
POLICE/AMBULANCE/FIRE: All available.
TELEPHONES: Cannot be placed on the vessels.
GENERAL: Possible to supply provisions, especially vegetables and shell-fish at good prices.
SHORE LEAVE: No restrictions.
DELAYS: Some days in April and October the surge is very strong and work has to be suspended.
AUTHORITY: Capitan del Puerto.

PUERTO BARRIOS: 15.44 N. 88.36 W.

DOCUMENTS:
Clearance from Last Port.
Crew List, 1 legalised and 9 copies.
Passenger List 1 legalised and 7 copies or negatives.
Cargo Manifest, 1 legalised and 21 copies.
Stores/Provisions List 3 copies.
Voyage Memorandum 4 copies.
Bills of Lading, 2 sets.
Declaration of Health.

PILOTAGE: Pilot boards 2 miles off Puerto Barrios, from small unmarked launch. If awaiting Pilot, vessel may anchor about three miles North of Puerto Barrios, keeping port entrance clear. No VHF.
ANCHORAGE: In Santo Tomas Bay, depths up to 6 fathoms.
MAX. SIZE: length 600 ft., draft 30 ft.
HEALTH: Advise Agent in advance if any fever or contagious disease suspected on board. Otherwise pratique granted on arrival. Officials board only between 0600 hrs. and 1800 hrs.
RADIO: Coastal radio in Costa Rica, call sign TIM operating on 8485 kc/s.
TUGS: No tugs available.
BERTHING: One pier owned by International Railway used to discharge fuel oil. 1,000 ft. berthing length on each side. A flag is shown on the pier to indicate where vessel will berth. Berthing recommended during daylight hours only. Tankers discharge on South side of the pier.
See Shipmasters Report for Santo Tomas de Castilla.

FRESH WATER: Available at the pier.
FUEL: Not available.
MEDICAL: Doctor available. All crew require International Vaccination Certificates.
CUSTOMS ALLOWANCES: Normal daily consumption on board. No tobacco, wine or spirits to be taken ashore.
IDENTIFICATION CARDS: Required.
TIME: GMT minus 6 hours; no alterations during the year.
SHORE LEAVE: Allowed.
AUTHORITY: Commandante del Puerto.

SAN JOSE: 13.55 N. 90.50 W.

DOCUMENTS:
Clearance from Last Port.
Crew List, 1 legalised and 4 copies.
Passenger List, 1 legalised and 7 copies.
Passengers in Transit List, 4 copies.
Cargo manifest, 1 legalised and 19 copies.
Stores/Provisions List, 3 copies.
Voyage Memorandum, 4 copies.
Cargo Check Lists, 18 copies.
Mail List, 7 copies.
Bills of Lading, 2 sets.
Baggage Declaration, per passenger, 4 copies.
Declaration of Health.

PILOTAGE: Not required and no resident Pilots available, except for Tankers where services of a Pilot could be made available upon request.
ANCHORAGE: San Jose is a lighter port (open roadstead). Vessels anchor about 0.25 mile from pierhead in 8–9 fathoms of water.
RESTRICTIONS: Normally no pratique granted after 1900 hrs., although in some instances and if prior arrangements made, vessels could be received by Port Authorities up to 2300 hrs. Tankers moor in daylight only.
MAX. SIZE: Size immaterial since no docking facilities. Cargo transported from vessel to pier and vice-versa by means of steel lighters or barges of 35 tons capacity each. This applies to dry cargo only. Bulk, liquid cargo at respective terminals (oil and oil by-products, imports, and molasses export), where vessels proceed after pratique.
HEALTH: Pratique automatic (0700 hrs. to 1900 hrs.), irrespective of previous port of call. Master's obligation to notify Authorities on arrival of any suspected disease and/or fever on board, in order that adequate precautions taken.
RADIO: Messages should be routed via Guatel.
TUGS: None available or required for manoeuvring vessels.
STEVEDORES: No gangs available after 2100 hrs., unless another vessel is working in port. Rate of discharge/loading: dry cargo: 15–20 tons per gang hour. Max. gangs available: 3. Bulk cargo handled ten times faster.
MEDICAL: Hospital available. No vaccination/fever certificates required.
TANKERS: 2 buoy berths for tankers. Discharging: 8 in. diameter lines. ESSO Terminal: Mooring Master assists berthing. IRCA Terminal: Stern discharge.
FRESH WATER: None available.
FUEL: None available.
GANGWAY/DECK WATCHMEN: None required or necessary.
OPENING/CLOSING HATCHES: By stevedores.
CUSTOMS ALLOWANCES: On board, no restrictions, but no crew member allowed to bring ashore more than amount required for personal use.
CARGO GEAR: Ship's gear used for loading and discharging dry cargo. Vessels must bring own lines to tie lighters alongside.
IDENTIFICATION CARDS: Necessary for those on shore leave.
CONSULS: All Consulates located in Guatemala City, where vessels' Agents, when and if required, have special documents legalised. Normally, however, Agents can take care of regular certifications required, through port officials, who are authorised to certify documents in absence of a consul of a particular nation.
REPAIRS: No facilities available.
REPATRIATION: Possible. Usually arranged by Agents in cooperation with vessel's Agent in Guatemala City.
AIRPORT: Nearest airport Guatemala City, 108 km. due North of San Jose. Daily flights to and from all parts of world.
TIME: Central Standard Time, GMT minus 6 hours. No changes during year.
HOLIDAYS: January 1st; Holy Thursday; Good Friday; Easter Saturday; March 19th; May 1st; June 30th; July 25th; September 15th; October 20th; November 1st; December 24th; December 25th; December 31st.
POLICE/AMBULANCE/FIRE: These can be contacted through Agent at San Jose and/or Guatemala City.
TELEPHONES: No facilities for placing telephones on board.
SHORE LEAVE: Allowed.
DELAYS: Only 2 dry-cargo vessels can work simultaneously. A third vessel must await departure of 1 of the first 2. Only 1 tanker can work at each bulk liquid cargo terminal.
SHIPMASTERS REPORT: September, 1978.
Approach was direct from the Pacific. A good landfall was made. San Jose main Light was observed to be Isophase, rather than Occulting, every 20 seconds.
Anchorage: Vessel anchored in a position with the head of the Iron Wharf bearing 011°(T) – 8 cables. We lay to 4 shackles of cable on the starboard anchor, in 13 fathoms of water. Despite a

considerable swell at times, the vessel did not drag her anchor. If anchoring, vessels do not take a Pilot.

Berthing: Ocean-going vessels and at times, due to the swell, almost any vessel, cannot berth alongside the wharf. While we were at San Jose a tanker of about 20,000 d.w.t. berthed stern-on with both anchors down, to load molasses.

I understand that, if no tanker is expected, general cargo ships are sometimes berthed in this manner. The tanker employed a Pilot.

Communications; If at anchor, it is best to keep radio watches and maintain long-range communications in this way. When working cargo, the Supervisor is in VHF communication with the Agents, but this facility is not available outside of working days.

Charterer's Agents: Transmares S.A., of Guatemala City, who send a respresentative to San Jose while a ship is there. They are efficient and helpful.

Documents: As per "Guide to Port Entry". It was not possible to get any documents legalised prior to arrival, but this was arranged by Agents, as also was legalisation of documents for subsequent Central American ports.

Cargo Work: Continuous, weather and the supply of lighters permitting. There are only 3 general cargo gangs in the port and only 2 ships can be worked at a time. The first ship gets 2 gangs, the second ship 1 gang.

Many delays were experienced waiting for lighters, and 2 full days discharging time were lost due to the size of the swell.

This is not a very serious problem alongside the ship, but makes discharge of the lighters at the wharf impossible.

Rate of discharge of coiled steel rods was 55 tons per gang-hour, net of delays awaiting barges.

Pratique: Granted on arrival.

Provisions: Not purchased.

Fresh Water: Unobtainable at the anchorage.

Shore Leave: Permitted, but one has to take one's chances of getting a ride to and fro on the lighters. Not many people went ashore and fortunately none were stranded when work was suspended.

SANTO TOMAS DE CASTILLA: 15.42 N. 88.37 W.

DOCUMENTS:

Clearance from Last Port.
Crew List, 1 legalised and 9 copies.
Passenger List, 1 legalised and 7 copies.
Passengers in Transit List, 4 copies.
Cargo Manifest, 1 legalised and 21 copies.
Stores/Provisions List, 3 copies.
Voyage Memorandum, 4 copies.
Cargo Check List, 18 copies.
Mail List, 7 copies.
Bills of Lading, 2 sets.
Baggage Declaration, per passenger 4 copies.
Declaration of Health.

PILOTAGE: Pilot can be taken on board at 2 stations on ship's request, 1 at Manabique Point and the other 1 mile distant from the Villedo lighthouse.

The pilot station and the Control Office of Maritime Traffic of the Navy maintains listening on R.T. frequencies 2738 k/cs., and 156.8 mHz.

ANCHORAGE: Outside of access channel to Santo Tomas de Castilla the whole N.W. side, approximately area of 2 miles with depth between 4 and 5.5 fathoms.

MAX. SIZE: Max. length 600 ft. Currently the port entrance channel is dredged to enable passage of vessel up to a max. draft of 32 ft.

HEALTH: In case of any contagious illness or fever on board the Sanitary Authority will be informed through respective Agent and vessel will moor to be examined by doctor in charge whether to subject vessel to quarantine or not. No automatic pratique.

RADIO: ETA cables to Agent and Receiver made through Coastal Station in Costa Rica; Signal: TIM on 8485 kc/s. or 8/12 mc/s.

TUGS: Tugs' service not compulsory. Use of tug lines, charge is included in tug service.

BERTHING: Possible to arrive at any time. Vessels work cargo alongside quay 2980 ft. berthing length available.

STEVEDORES: Arrangements made between Agent and ship owner. Agent requests services.

MEDICAL: No advance notice necessary. Hospital facilities available. International vaccination certificate required.

TANKERS: Diameter of pipe-lines 16 in. and load/discharge lines 14 in. No slop discharge facilities. Only 1 mooring berth for tankers and max. draft permitted 30 ft. Also see "Shipmasters Report".

DENSITY: 1015.

FRESH WATER: Pipe-lines alongside quay. Delivered by hoses belonging to port, Rate 15 t.p.h.

FUEL: Available, no advance notice required. (Bunker: 60°, and diesel: 38°).

FIRE PRECAUTIONS: No specific precautions for tankers. Hydrants available to combat fires, besides tug's services and Coast Guard ships of Navy.

GANGWAY/DECK WATCHMEN: Not essential. If necessary provided free by port.

OPENING/CLOSING HATCHES: Carried out by crew.

CUSTOMS ALLOWANCES: Tobacco, Wine and/or Spirits: No definite quantity and usually regulated by Captain.

IDENTIFICATION CARDS: Necessary.

CONSULS:

Italy
Holland
Sweden
Germany
Mexico
Honduras
El Salvador

REPAIRS: Only minor deck and engine repairs.

REPATRIATION: Possible.

AIRPORT: 10 km. distance. Aviateca has daily flights to the capital and to Flores Peten.

TIME: GMT minus 6 hours.

HOLIDAYS: 1st January; 7th March; Maundy Thursday and Good Friday; 1st May; 30th June; 15th September; 1st November; 25th December.

TELEPHONES: No facilities for placing telephones on board.

SHORE LEAVE: Possible.

SHIPMASTER'S REPORT: 1976

Approaches: No difficulty once position is ascertained approaching the Gulf of Honduras. The Pilot boarded 3 miles North of the Villedo Shoal Beacon. Pilots have VHF Channel 16 call Porto Barrios Pilots. Only 1 pilot speaks English so if he is on duty there is no difficulty in communications.

The lights on the approach beacons are said to be unreliable but all were found to be good radar targets.

At the present time a dredger is working on a new approach channel to give a 32 ft. buoyed channel past Puerto Barrios up to Santo Tomas de Castilla.

General: There is no tug supplied by the Port Authorities but there is a tug working with the dredger which can be hired on request through the Port Authorities. The Pilot advised that this vessel have the tug for berthing as the ship has a 220 degree turn to make in a restricted turning basin off the berth. The same case applied at unberthing where the Pilot considered it necessary to have the tug to swing the vessel out into the departure channel.

The area is still recovering from the severe earthquake some 8 months ago in which the finger pier at Puerto Barrios was destroyed. This now constitutes a submerged hazard while in the channel on the approaches to Santo Tomas de Castilla. The channel is poorly marked and at present there are numerous survey buoys which can be confusing.

The berth is stern to at the Eastern end of the cargo jetty at Santo Tomas using 2 anchors and backing up to 10 ft. off the jetty from where the hose is passed up to the stern line by a mobile crane. The connection is made by the ship's crew. There is a 1 × 8 in. hose for all grades into a 10 in. shore line which is approximately 5 km. long. The requested back pressure of 8.5 kg. was easily maintained using 2 pumps.

AUTHORITY: Port Commander.

NOTES

Please also advise Shipping Guides Ltd.

Guinea, Republic of

CONAKRY: 09.30 N. 13.44 W.

DOCUMENTS:

7 Crew Lists – Crew list with vaccination date for health service.
5 Passenger Lists.
5 Lists Port of Call (the last ports).
3 Stores Lists.
3 Lists Crew Declaration (personal effects).
5 Manifests of Cargo (if any).
2 Copies of Bills of Lading.

PILOTAGE: Telegraphic address Pilot station: "Harbour Master's Office, Conakry". Pilot meets vessels N.E. of sea buoy Tonnelier.
ANCHORAGE: Safe deep anchorage.
RESTRICTIONS: No entry at night. Channel depth 8 m. MLW.
MAX. SIZE: 600 ft. long. Max. draft for tankers 31–32 ft. high water.
HEALTH: Valid yellow fever and smallpox inoculation Certificates.
RADIO: Conakry Radio 2182-2586 kc/s.
TUGS: Tugs normally connect to starboard side. Ship's lines used.
BERTHING: All tankers berth according to high water. No berthing at night. Berthing 0700 hrs. to 1900 hrs. 10 berths, max. depth 11.5 m.
STEVEDORES: ETA to "Navalguinee" in order arrange gangs.
MEDICAL: Advance notice required for medical service, hospital facilities available.
TANKERS: Pipe-line 5,280 ft. long, 10 in. diameter. 2 tanker berths, 31/32 ft. high-water max. draft at these berths.
DENSITY: 1016 in the port with particular relation to state of tide.
FRESH WATER: Available by connection from pier. Rate of delivery with good pressure 30 t.p.h.
FUEL: Not available.
FIRE PRECAUTIONS: Special fire service for tankers.
GANGWAY/DECK WATCHMEN: Compulsory, particularly for tankers.
OPENING/CLOSING HATCHES: Normally by crew. Stevedores if requested by Master.
CERTIFICATES: Certificate of Deratisation; Log Book.
CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes out of bond. Wine and/or Spirit, 1 litre of spirit and 1 litre of wine per day out of bond.
IDENTIFICATION CARDS: Necessary.
CONSULS: All major maritime nations.
REPAIRS: None available.
REPATRIATION: All facilities exist for effecting crew changes and arranging repatriation to Europe.
AIRPORT: International airport distant 15 km. served by regular airlines.
TIME: GMT plus 1 hour.
HOLIDAYS: New Year's Day (1st January); Women's National Day (9th February); Labour Day (1st May); 1958 Referendum Day (28th September); Independence Day (2nd October); All Saint's Day and Guinea Army's Day (1st November); Anniversary of the Basic Law of 8th November 1964 (8th November); Assumption (15th August); Anniversary of Youth's Creation (J.R.D.A.) (26th March); Christmas (25th December).

Varying holidays which depend on the position of moon: Ramadan – End of fasting; Tabaski – Pilgrimage day at Mecca; Mahouloud – Day after Prophet Mahomet's Birthday.

Work available during holidays, except Labour Day, Independence Day, Ramadan and Tabaski.

POLICE/AMBULANCE/FIRE: Police 17; Ambulance 16; Fire 18.
TELEPHONES: Not possible to place telephones on board.
SERVICES: None.
SHORE LEAVE: Crew allowed ashore.
SHIPMASTER'S REPORT: 1974.

There are no shore or harbour lights in operation. The Tonnelier Buoy is off station together with all channel buoys other than Nos. 3, 6 and 9 all of which are unlit. There is no plan to replace or re-light these navigation marks.

Only 1 tug is available.

Fresh water can only be obtained by Fire Brigade Tanker truck of 4 tonnes capacity at a cost of £1.60 per tonne. This water if received needs chlorination and boiling before use.

Consuls – There is no British Consular Officer resident in this port. The nearest is located at Dakar in Senegal.

Repatriation of crew members by air is possible but difficult. Procedure is as follows;

Air ticket must be purchased outside Guinea. Airline then advises their office at Conakry that purchase has been made. Airline office at Conakry in turn advise ship's agents when ticket and flight are available. Only then can Immigration formalities be commenced. Entry and exit visas are required and the overall operation may take up to one week.

Time – GMT is kept.

In the rainy season vessels should be prepared for the African Tornado. This usually occurs at night and produces winds reaching 90/100 knots from calm in a matter of minutes. It is as quickly over. The best indication of approach of this weather is a steep rise in the barometer, the highest winds usually Northerly being experienced during the rise.

Vessels berthed at the banana berth should be well fendered as they are subject to considerable movement due to invisible ground swell. A slight starboard list when alongside is an advantage.

SHIPMASTER'S REPORT: 1975.

Radio: Conakry Radio not working on radio telephony as stated, although same information given in List of Coast Stations. (Freetown Radio helped me with the relaying of my messages to Conakry and Europe).

Fresh Water: Only available by truck loads and after written application to Harbour Master, stating exact amount required. (Water is very expensive).

Identification Cards: Seamen's Books or passports used. (No landing permits issued).

Time: GMT.

AUTHORITY: Harbour Master.

PORT KAMSAR: 10.39 N. 14.37 W. (See Plan Book)

DOCUMENTS:

1 Vaccination List.
5 Crew Lists.
5 Passenger Lists.
1 Crew Declaration (Personal effects) List.
1 Stores List.
5 Last Ports of Call Lists.
7 Manifests of Cargo.
5 Copies Bills of Lading.

To ensure the best possible turn-round for general cargo vessels complete sets of the required cargo documents should be made available to the authorities by hand of the Master. Delays have been occasioned by the late arrival of documents sent by post. It would be of help for the Master to send hatch distribution and the amount of refrigerated cargo, if any, at the same time as ETA.

Quarantine, Immigration and Customs: Representatives of the departments board after the vessel has been made fast alongside. The normal "Q" flag should be flown by arriving vessels.

ARRIVAL ADVICE: Masters are required to send ships ETA, addressed to Shipping Superintendent C.B.G., through Port Kamsar Radio Station, 7 days, 5 days, 3 days and 1 day before arrival at Port Kamsar.

APPROACHES:

Approaches to Rio Nunez: Port Kamsar formerly known as Kakande is located on the East bank of the Rio Nunez river and is approximately 17 km. from the sea.

Vessels bound for Port Kamsar will find there are few natural features to aid a landfall. The most prominent feature is Cape Verga situated to the eastward of the Rio Nunez entrance. This cape can be observed by radar at a distance of approximately thirty miles. At present the light on Cape Verga is extinguished.

To the westward of the Rio Nunez entrance are the Compony shoals and Conflict reef. These are screened by a series of light buoys and vessels approaching from the West should keep them well on the port hand.

Another prominent feature is Gonzales Rock on the starboard side close to the entrance to Rio Nunez. During daylight the hull and superstructure of a wreck stranded six cables North East of the old Gonzales light structure is visible and may be picked up by radar at a distance of between ten and fifteen miles. A light buoy is positioned screening the rocks and is identified as buoy No. VII.

Vessels proceeding to Port Kamsar should anchor and await the arrival of the Pilot in the area bounded by Latitudes 10° 26′ N and 10° 28′ N. and Longitudes 14° 44′ W. and 14° 46′ W. Vessels must not proceed beyond 10° 28′ N.

Kamsar Buoyage System: Approaches to Rio Nunez Sea-Buoys

No.	*Shape–Colour*	*Position* *N.*	*W.*	*Characteristic*	*Visibility (miles)*
I	Red cylindrical	10° 20.0′	15° 28.5′	GP. FL. 3 Ev. 15 sec.	5
II	Red cylindrical	10° 12.3′	15° 25.5′	FL. 10 secs	5
III	Red cylindrical	10° 09.4′	15° 12.1′	GP. FL 4 Ev. 15 secs	11
IV	Red cylindrical	10° 13.5′	15° 01.5′	GP. FL. 2 Ev. 10 secs	5
V	Red cylindrical	10° 19.2′	14° 52.5′	GP. FL. 3 Ev. 10 secs	5
VI	Red cylindrical	10° 25.5′	14° 47.5′	FL. 5 secs	5
VII	Black conical	10° 23.5′	14° 44.5′	GP. FL. G 4 Ev. 10 secs	2.6
VIII	Red cylindrical	10° 29.5′	14° 43.9′	FL. 10 secs	5

Charts of the area are as follows:

British Admiralty:
600 Cacheo River to Iles de los.
1562 Rio Nunez and Riviere Compony.

United States Naval Oceanic Office:
51580 Ponta Caid to Cap Verga.

Service Hydrographique de la Marine (These charts are recommended by the Port Captain):
6148 Embouchure du Rio Nunez.
6228 Acces au Rio Nunez.
6288 Abords du Port Kakande.

Rio Nunez Transit: The channel from the mouth of Rio Nunez to the bauxite loading wharf at Port Kamsar is 17 km. in length and 120 m. wide and is well marked by 21 light buoys. The channel is subdivided into an inner and outer channel. The bottom of which consists of mud and sand.

The inner channel extends from the bauxite wharf to point "F" and is dredged to between 8.25 and 8.50 m. below Reference Datum Level (R.D.L.) which is defined at +0.15 m. above the lowest water registered (British Admiralty Tide Tables L.L.W.S. = 0.00).

The outer channel extending from point "F" seaward is dredged to a depth of 9.00 m. below R.D.L. increasing to a depth of – 12.00 m. from km. 15.3 to the sea.

The turning, waiting basin for inbound vessels is dredged to –7.75 m. below R.D.L. the bottom of which is mainly mud and it is good holding ground.

PILOTAGE: Pilotage service is compulsory for all vessels over 150 ft. OAL. Vessels under 150 ft. OAL will also be required to have a pilot aboard on their first calls, but may be exempt thereafter by consent of the Harbour Master and approval of the Port Director.

Pilots are supplied from the Director's Office. Pilots board vessels in the designated waiting area, the pilot will pass instructions by VHF radio, aldis lamp or loud hailer from the pilot boat, and when conditions are too unfavourable for a pilot to board the vessel at the designated area the vessel will follow the pilot boat in until conditions are suitable for boarding.

Pilot boats are fitted with VHF radio can be contacted on Channel 16 or 12

ANCHORAGE: See "Approaches".

MAX. SIZE: Max. LOA 225 m. Shipmaster reported max. draft at LW 42 ft. 8 in.

HEALTH: Authorities board when vessel is alongside the berth. Smallpox, yellow fever and Cholera vaccination certificates required.

RADIO: The Port Radio Station is operated by the Post, Telegraph and Telecommunications Department. The equipment includes a 5 kW. transmitter (both voice and telegraph) with the following frequencies.

A. *Frequency*	*Power*	*Mode*	*Call Letters*
6383 kHz	5,000 Watts	A 1	3X0 27
8702 kHz	5,000 Watts	A 3	3X0 28
12885 kHz	5,000 Watts	A 3	3X0 29
484 kHz	1,000 Watts	A 1	3X0 30
500 kHz	1,000 Watts	A 1	3X0

NOTE: *Watchhours are at the GMT times shown below:*

0800 – 0850	500 kc/s.
0850 – 0950	6383 kc/s.
0950 – 1100	500 kc/s.
1100 – 1200	6383 kc/s.
1600 – 1700	500 kc/s.
1700 – 1800	6383 kc/s.
2000 – 2100	500 kc/s.
2100 – 2200	6383 kc/s.

B. *Port Operations:* VHF Channel 16 and 12. Watchkeeping hours: 0800–1200; 1400–1700 and as required.

C. A further means of communication is through Port Kamsar Post Office through which international connections may be made.

Telegraphic address: BCTR KAMSAR.
Telex : 817 Kamsar.

TUGS: One 825 h.p. tug is on station and will assist vessels in docking and undocking. It is anticipated that a further more powerful tug will eventually be stationed at Port Kamsar.

BERTHING: Located 17 km. from the channel entrance is the bauxite wharf.

The area alongside the wharf has been dredged to a depth of 13.5 m. below R.D.L. Fendering is separate from the wharf proper, and consists of 12 flexible steel dolphins spaced 21.6 m. apart and protruding 4 m. from the face of the wharf.

A vessel proceeding to the bauxite wharf will normally swing off the berth and make fast port side to, heading seaward, during the flood tide. If the berth is occupied the vessel will be anchored in the turning basin to await the berth.

There is a single loading berth at the wharf. The longest vessel berthed had a LOA of 225 m., which is considered to be the maximum length permissible.

The mobile shiploader has a travel of 165 m., and an outreach of 21 m. from the outside face of the fendering. It is rated at about 4,000 tonnes/hour.

A vessel's air draft, i.e. distance from the waterline to the top of the hatch coaming, must not exceed 11.28 m. at Highest High Water.

Weight of bauxite loaded is determined by a formula using deadweight survey and weightometer. The weightometer is used for loading runs.

Stowage factor of the dried bauxite is 28.

Bauxite vessels sail from Port Kamsar during the flood tide. Maximum departure draft is regulated according to tidal conditions.

Facilities for the discharge of petroleum products are also available on the bauxite wharf. Attached to the shiploader is a chicksan arm with an eight inch connection. This feeds 2 main lines, one 16 in. line for Bunker "C", and one 8 in. line for Diesel. Discharge rates average about 450 tonnes/hour at 100 lbs. per sq. in. back pressure at the ships pumps.

Storage facilities are three 10,000 tonnes Bunker "C" tanks, and two 3,000 tonnes diesel tanks.

There are 2 small general cargo wharves located at the entrance to the Dougoufissa Creek, where vessels of up to 100 m. LOA with a maximum draft of 6 m., may berth. As there is only 3.5 m. at Lowest Low Water, these vessels will be aground at low water periods.

One of these wharves is equipped with a heavy lift crane – derrick with a maximum S.W.L. of 110 tonnes. Safe Working Loads are as follows:-

Radius of derrick (metres)	*Lifting capacity (tonnes)*	*Height under hook (metres)*
16.5	110	29
26	75	23
32 (max.)	45	11

The derrick is also equipped with a secondary hook with a capacity of 20 tonnes.

At the same wharf there is a 4 inch line for the discharge of petrol (gasoline) by coastal tankers. Discharge rates average 50,000 litres/hour. The storage capacity is 850,000 litres.

Two 400 tonnes and two 200 tonnes barges are available for loading and discharging midstream.

WIND/WEATHER/TIDE: In the Rio Nunez approach area waves up to 4 m. can be encountered. At the entrance to the fairway or channel they are generally less than 1 m. high during the rainy season, and less than 0.5 m. high in the dry season. Waves and swell in the inner channel and harbour area are generally very moderate.

The tide, in the the proximity of the buoyed channel, runs N.N.E. and S.S.W. at 2.5 knots under normal conditions, but can reach 6 knots during spring tides in the rainy season.

The flood tide runs parallel with the line of the bauxite loading wharf at a speed of up to 4 knots. The ebb tide, augmented by water coming out of the Dougoufissa Creek, runs through the bauxite wharf at an angle of approximately 20° at a speed of up to 6 knots on spring tides in the rainy season, tending to set the vessel off the wharf. It is therefore absolutely essential to tend moorings continuously, particularly on the stern of a loading vessel.

The salinity of the Rio Nunez at the bauxite loading wharf varies between 1013 (rainy season) and 1028 (dry season) at high water.

Port Kamsar has a typical tropical climate, which is characterised by two separate seasons.

Rainy season from June to October

Maximum rainfall	is during July and August mainly at night.
Relative humidity	is 70 to 80% during the day and 90 to 95% at night.
Temperatures	range from 17 to 38° C, with an average of between 22 to 28° C.
Wind conditions	Variable from between South and West, Force 3 to 6 Beaufort Scale. Possible tornados from between North and N.E. with wind reaching force 10 Beaufort Scale for short periods.

Dry season from November to May
Little rainfall.

Relative humidity	is 30 to 50% during the day, and 80 to 90% at night. There is often coastal fog in the mornings.
Temperatures	range from 15 to 42° C, with an average of between 20 to 35° C.
Wind conditions	Light breezes from the Southwest to West, force 1 to 3 Beaufort Scale.

MEDICAL: Hospital facilities at Port Kamsar are available only on an emergency basis.

TANKERS: See "Berthings"

TIME: GMT.

HOLIDAYS: New Year's Day (1st January); Labour Day (1st May); Anniversary P.D.C. (14th May); Independence Day (2nd October); Victory Day (22nd November); Christmas Day (25th December); Tabaski (Variable date); Ramadan (Id il Fitri) (Variable date).

All Sundays are also declared Public Holidays. The President may also, at his discretion, declare any other day to be a Public Holiday.

The loading of bauxite is generally continued without stoppage for Public Holidays.

General cargo will not, except in special circumstances, be worked on Victory Day, Tabaski and Ramadan (Id il Fitri). All other Public Holidays are normally worked.

SHORE LEAVE: Crew members are not granted shore leave at present.

GENERAL: *Stores:* Provisions are scarce and therefore not available to calling vessels.

Gangways: Vessels must provide and attend their own gangways. A vessel berthing at the bauxite wharf should have its gangway swung out and ready to lower.

Normal practice of the port is for the foot of the gangway to be heaved out and landed on the wharf after the vessel is fast alongside.

Port Directors Office: The office of the Port Director is solely responsible for the operation of Port Kamsar, which includes the provision of Pilotage, tugs and launches.

The Office acts as sole agent for all vessels calling at Port Kamsar, including the normal ships business functions performed by ships agents.

SHIPMASTER'S REPORT: 1974.

Density: Varies from 1013–1028 according to season.

Fresh Water: Available, rate 20 t.p.h. Not recommended as drinking water.

Repairs: Small repairs can be carried out in an emergency.

Airport: Nearest airport is Conakry which is 8 hours away by car.

AUTHORITY: Port Captain.

NOTES

Please also advise Shipping Guides Ltd.

Guinea Bissau, Republic of

BISSAU: 11.51 N. 15.34 W.

DOCUMENTS:

Entrance Declaration.
Clearance from the last Port of Call.
List of all Passengers on Board, either in transit or disembarking in Bissau.
Provisions List.
List of the Crew Members Effects.
2 Lists of Passengers Baggage.
List of Cargo to disembark in Bissau, Baldeade (Bolama) or otherwise in transit to be disembarked in another port.
List of Cargo (inside sealed envelope).

PILOTAGE: Pilot's base and radio beacon located at Caio Point, (small island at the entrance of Geba's channel). To call the Pilots and/or the radio beacon, send telegram to Servicosmarguine, informing of the ETA at Caio; pilotage is compulsory.
ANCHORAGE: Between Bissau and the Ilheu do Rei.
MAX. SIZE: Draft, 24 ft.
HEALTH: Visit of port doctor compulsory if ship has no doctor, or if permission for exemption has not been required; permission can be requested by radio. When needed, the health services in Bissau can be used by passengers or crew members. Yellow fever and smallpox vaccinations required.
RADIO: Station call sign CQF weekdays on at 0900, 1300, 1600, 1800 hrs. GMT. Sundays 0900 and 1100 hrs. GMT. Frequency 500 kHz, CW.
TUGS: 1 tug of 320 h.p. and 1 of 800 h.p. available.
BERTHING: Ponte, Cais de Bissau, length 131 m., width 25 m., depth 8 m. 1 lifting crane with a max. lifting capacity of 25 metric tons. 1 lifting crane with a max. lifting capacity of 15 metric tons. 7 lifting cranes with a max. lifting capacity of 1.5 metric tons.
STEVEDORES: 1,500 stevedores available for loading and unloading cargo.
FRESH WATER: Available; pumping rate, 10 t.p.h.
FUEL: Diesel available; pumping rate, 6 t.p.h.
CONSULS: Belgium, tel. 3737; France, tel. 2470; Lebanon, tel. 2737.
REPAIRS: Small repairing work can be done on machinery or ship's hull.
AIRPORT: 7 kms. from Bissau; 3 flights to Lisbon per week.
TIME: GMT minus 1 hour all year round.
HOLIDAYS: 1st January; 10th June; 5th October; 1st November; 1st, 8th and 25th of December.
POLICE/AMBULANCE/FIRE: Police, tel. 3925; Ambulance and Fire, tel. 2222.
TELEPHONES: Line connection land-ship, if requested to the Post Office authorities.
AUTHORITY: Port Director.

NOTES

Please also advise Shipping Guides Ltd.

Guyana

ESSEQUIBO RIVER (Bartica): 06.24 N. 58.37 W.

DOCUMENTS: See "Georgetown".

PILOTAGE: Pilots are stationed at Georgetown. ETA to be given 24 hours in advance to Pilot station. Pilotage compulsory. Pilot boards from black cutter 5 cables N.W. of the Outer Georgetown Light.

Essequibo light (steel framework tower with red and white horizontal bands) marks seaward end of Essequibo main ship channel. Vessels in vicinity of Demerara Pilot station should listen for pilot boat on VHF Channel 16.

RESTRICTIONS: The Essequibo Bar is composed of hard mud and sand. The least depth of water is 3 ft. less than for Demerara Bar. Vessels should not attempt to cross the Essequibo Bar drawing more than 3 ft. less than that predicted for the Demerara Bar.

MAX. SIZE: Controlled by Bar draft predictions.

HEALTH: Pratique given at Georgetown when Pilot boards. If vessel is suspect or infected, Master to advise Harbour Authority by radio before arrival.

RADIO: Demerara Radio call sign 8RB operating on 2182 kc/s. Georgetown Lighthouse operates VHF on Channel 16 and HF on 2738 kc/s. 24 hours a day. Also SSB 8281.2 kHz.

TUGS: Not available.

MEDICAL: Hospital at Georgetown and Bartica. All crew members need valid smallpox vaccination certificates.

DENSITY: 1000, fresh water.

FRESH WATER: Not available.

FUEL: Not available.

OPENING/CLOSING HATCHES: By ship's crew.

CUSTOMS ALLOWANCES: Up to 200 cigarettes and 1 bottle wine or spirits per man. Only 40 cigarettes may be taken ashore at any time.

CONSULS: At Georgetown.

REPAIRS: Government dry dock situated at Mazaruni, approximately 40 miles up river at junction of Essequibo and Mazaruni rivers. Extreme dimensions; 160 ft. by 35 ft.

AUTHORITY: Transport and Harbours Department.

GEORGETOWN: 06.49 N. 58.10 W. (See Plan Book)

PORT LIMITS: Seaward by an arc of a circle with radius 1 nautical mile, with the Georgetown lighthouse as centre.

DOCUMENTS:

Certificate of Registry.
8 Crew Lists.
8 Provisions and Stores Lists.
4 Passenger Lists.

Customs Documents:

2 Reports of Ships Stores (Form C1).
2 Lists of Crew Personal Effects (Form C2).
1 List of Unmanifested Cargo (Form C3).
12 Health Declaration Forms (W.H.O.2)
Health Documents for Crew (1 copy for each Crew member).
5 Cargo Manifests.
5 Bills of Lading

PILOTAGE: Vessels apply for Pilots through local Agents or direct to Chief Pilot, Georgetown, through "Demerara Radio, 8 Romeo Bravo", 12 hours in advance of ETA at Pilot station when vessel is proceeding in to Georgetown Harbour. Pilot boarding ground is in North-Western quadrant of circle with radius 5 cables and centre the Outer Georgetown Light. Normal international day or night signals for "I require a Pilot" are used. All pilot cutters are painted black (hull) and white (superstructure) with the word "Pilot" painted in white on black ground. Cutters are approximately 50 ft. in length.

ANCHORAGE: There are 5 with a least depth of approximately 20 ft. MLWS named A to D from North to South. Vessels are safely anchored at any of the above anchorages 1.5 to 2 cables from Georgetown park line. Bottom is soft mud and provides good holding ground.

RESTRICTIONS: No entry restrictions except those on draft imposed by the bar at estuaries.

MAX. SIZE: Draft 21 ft. 6 in.

HEALTH: Radio Pratique is not given, and pratique is only given at Georgetown. This does not normally involve a visit from the Health Authorities if the vessel is clear. Pilot may grant pratique if vessel has just arrived from a British port, and if vessel has not been to a Central or South American Spanish-speaking port or French-speaking port (West Indian or otherwise) or any of the ports of New Orleans, Mobile or Tampa within 4 weeks of its arrival at the Pilot station. If a vessel is "suspect" or "infected" Master should advise Harbour Authority by special message through Demerara Radio or Georgetown Lighthouse and await advice of Port Health Officers; meanwhile, if in the vicinity of Georgetown, vessel may anchor at the specified quarantine anchorage near the Outer Georgetown Beacon as entry into the limits of the port without the authority of the Ministry of Health is prohibited if the vessel is suspect or infected.

RADIO: Name of radio station "Demerara Radio", call sign "8RB", always standing by on 2182 kc/s., will give latest weather report or RDF bearings on request. Georgetown Lighthouse operates VHF on Channel 16, HF 2738 and SSB 8281.21 kHz.

TUGS: At present, vessels dock stem on to the tide without aid of tugs.

BERTHING: There are 14 main wharves all privately owned, situated along the river frontage at Georgetown and varying in length from 210 ft. to 730 ft. Depths alongside range from 16 to 20 ft. at low water springs, but as the bottom is soft mud vessels may safely lie aground alongside. Ships work cargo with their own appliances.

BULK HANDLING FACILITIES: The sugar berth is 416 ft. in length with least depth alongside of 18 ft. MLWS and can accommodate vessels up to 530 ft. in length. Loading rate is 500 t.p.h. using 2 chutes. Vessels should not be more than 63 ft. beam.

STEVEDORES: Ship's Agent normally arranges for gangs in accordance with cargo plans or Master's cable advice. Gangs are unionised. Stevedores work around the clock every day of the week though they are paid overtime between hours of 1600 and 1900 and they earn time-and-a-half or double time on public holidays according to which one of the 12 public holidays they work.

MEDICAL: No special advance notice of required medical attention is necessary, and hospital facilities are always available. All crew members need to have valid smallpox vaccinations certificates on entry.

TANKERS: There are no residue discharge facilities at this port. There are 4 tanker berths in the Georgetown area.

Rome Terminal (Shell) – depth alongside is 15 ft.
Ramsburg Terminal (Esso) – depth alongside 16 ft.
Ramsburg Terminal (Texaco) – depth alongside 8.5 ft.
Providence (Guyoil) – depth alongside 9 ft.

DENSITY: Average density in port is 1015, though during the rainy season (March-May; October-December) density of water may be as low as 1000 at low water in the harbour.

FRESH WATER: Fresh water is available, and is delivered alongside. The ship is required to pay for labour, overtime, etc., involved in the delivery.

FUEL: In case of emergency, providing advance notice is given by Master, vessels may be partially bunkered at any of Shell, Texaco or Esso installations. Vessels may be required to go alongside 2 hours before high water and leave not later than 1 hour after high water at the above-mentioned installations. Grades of fuel available are "Bunker C" and diesel fuel.

CONSULS: (and Embassies)

Belgium
Brazil
Canada
Colombia
Costa Rica
Cuba
Denmark
Egypt
France
Germany (F.R.)
India
Italy
Jamaica
Japan
Korea
Libya
Mexico
Netherlands
Norway
Panama
China (People's Republic)
Sweden
Trinidad & Tobago
United Kingdom
U.S.A.
Venezuela
Yugoslavia

FIRE PRECAUTIONS: There are no stated precautions other than regulations against pumping out residual heavy oil (e.g. "Bunker C"). Ships having cargoes of ammunition, high explosives, dynamite, etc., are required by Harbour Regulations to anchor North of Georgetown Lighthouse prior to proceeding alongside wharf to unload.

GANGWAY/DECK WATCHMEN: Services of watchmen are necessary and can be obtained through a watchman's pool by ships' Agent.

OPENING/CLOSING HATCHES: Normally carried out by ship's crew.

CUSTOMS ALLOWANCES: Each crew member is permitted up to 200 cigarettes aboard held out of bond, but is only allowed to take ashore 40 at any time. Only on a *final discharge* would a member of crew be permitted a tobacco allowance of half-a-pound. Each crew member is allowed to keep out of Bond, 1 (one) bottle of wine or spirits, but is prohibited from taking any of it ashore. Each member of crew is allowed tax-free only one-sixth gallon wine and one-sixth gallon spirits *when he is finally discharged.*

IDENTIFICATION CARDS: Not required.

REPAIRS: Every type of deck or engine repair is undertaken at Guyana National Engineering Corporation (GNEC) dry dock. Above waterline and engine-room repairs of any type are undertaken on vessels exceeding the dimensions mentioned below while vessel is anchored in the stream.

DRY DOCKS: GNEC Dry dock: A graving dock 210 ft. × 37 ft. 9 in. at entrance situated South of GNEC No. 2 Wharf, which is State owned and operated on normal commercial lines. 198 ft. length of dry dock is on blocks. Breadth: top 46 ft. 4 in., bottom 40 ft. 9 in., depth on sill at HWOST 92 ft.

Government Dry dock: Situated at Mazaruni approx. 40 miles upriver at junction of Essequibo and Mazaruni rivers is a graving dock and has extreme dimensions of approx. 160 ft.×35 ft.

REPATRIATION: Can be arranged.

AIRPORT: Timehri International Airport is situated approx. 30 miles South of Georgetown with highway connection and is served by many intercontinental airlines.

TIME: 3 hours behind GMT. No alterations made to clocks during the year.

HOLIDAYS: New Year (January 1st); *Eid-ul-Ahza; *Phagwah; Republic Day (February 23rd); Good Friday (April 12th); Easter Monday (April 15th); Labour Day (May 1st); *Youman Naubi; Caribbean Day (July 5th); Commonwealth Day (First Monday in August); *Deepavali; Christmas Day (December 25th); Boxing Day (December 26th). *Religious holidays are variable.

POLICE/AMBULANCE/FIRE: Tel. 63211, Emergency 999; Ambulance 62411, Emergency 999; There are Police/ Ambulance/Fire Stations on the waterfront.
TELEPHONES: Only connected to naval vessels.
SHORE LEAVE: Allowed.
AUTHORITY: Transport and Harbours Department.

LINDEN: 06.00 N. 58.17 W.

DOCUMENTS: See "Georgetown".
PILOTAGE: Pilots are stationed at Georgetown. ETA to be given 12 hours in advance to Pilot station. Pilotage compulsory. Pilot boards from black cutter 5 cables N.W. of the Outer Georgetown Light.

From Georgetown to Linden, Pilot not compulsory, but advisable to use Sprostons Pilot.
RESTRICTIONS: Governed by depth of water at Demerara River Bar. Entrance normally at HW. Max. speed limit on the river is 10 knots.
ANCHORAGE: Vessels proceeding to Linden in ballast and drawing less than 15 ft. may anchor at Southern limit of Georgetown in depth of 20 ft. MLWS.
MAX. SIZE: Draft 21 ft. 6 in.
HEALTH: Pratique given at Georgetown when Pilot boards. If vessel is suspect or infected, Master to advise Harbour Authority by radio before arrival.
RADIO: Demerara Radio call sign 8RB operating on 2182 kc/s. Georgetown Lighthouse operates VHF on Channel 16 and HF on 2738 kc/s., 24 hours a day. Also SSB 8281.2 kHz.
TUGS: Not available.
BERTHING: There are 2 bauxite berths accommodating vessels of up to 570 ft. One loader for metal grades has an airdraft of 29 ft. 8 in. and a loading rate of 800 t.p.h. The second loader for calcined bauxite has an airdraft of 34 ft. and a loading rate of 350 t.p.h.

The Alumina berth has a travelling tower with an airdraft of 64 ft. and a loading rate of 400 t.p.h. Max. beam of vessel 85 ft.
MEDICAL: Hospital at Georgetown, 59 miles distant. All crew members need valid smallpox vaccination certificates.
DENSITY: 1000, fresh water.
FRESH WATER: Can be supplied.
FUEL: Can be supplied.
OPENING/CLOSING HATCHES: By ship's crew.
CUSTOMS ALLOWANCES: Up to 200 cigarettes and 1 bottle wine or spirits per man. Only 40 cigarettes may be taken ashore at any time.
CONSULS/REPAIRS: At Georgetown.
AUTHORITY: Transport and Harbours Department.

NEW AMSTERDAM (Everton, Berbice): 06.14 N. 57.31 W.

DOCUMENTS: See "Georgetown".
PILOTAGE: Pilots are stationed at Georgetown. ETA to be given 24 hours in advance to Pilot station. Pilotage compulsory. Pilot boards from black cutter 5 cables N.W. of the Outer Georgetown Light. Pilots may also board ships bound for New Amsterdam within 5 cables Westward of Berbice Light. This beacon marks the seaward end of the channel and is to be passed on the port hand when entering.
RESTRICTIONS: The Berbice Bar is composed of fairly hard mud. Vessels may cross the Berbice Bar on even keel loaded to 3 ft. less than the Demerara Bar predictions.
MAX. SIZE: Controlled by Bar draft predictions.
HEALTH: Pratique given at Georgetown when Pilot boards. If vessel is suspect or infected, Master to advise Harbour Authority by radio before arrival.
RADIO: Demerara Radio call sign 8RB operating on 2182 kc/s. Georgetown Lighthouse operates VHF on Channel 16 and HF on 2738 kc/s., 24 hours a day. Also SSB 8281.2 kHz.
TUGS: Not available.
BERTHING: The Bauxite berth is about 1,500 ft. long, and has a fixed loading arm with an average loading rate of 500 t.p.h. The airdraft is 36 ft. Vessels berth starboard side alongside.

There is a strong ebb current of about 4–5 knots, although the flood runs at about 1 knot.
MEDICAL: Hospital at Georgetown. All crew members need valid smallpox vaccination certificates.
DENSITY: 1000, freshwater.
FRESH WATER: Can be supplied.
FUEL: Can be supplied.
DEVELOPMENTS: Proposals in hand for dredging Berbice Bar.
OPENING/CLOSING HATCHES: By ship's crew.
CUSTOMS ALLOWANCES: Up to 200 cigarettes and 1 bottle wine or spirits per man. Only 40 cigarettes may be taken ashore at any time.
CONSULS/REPAIRS: At Georgetown.
AUTHORITY: Transport and Harbours Department.

NOTES

Please also advise Shipping Guides Ltd.

Haiti

CAP HAITIEN: 19.46 N. 72.12 W.

GENERAL: For all general information refer to "Port-au-Prince".
APPROACHES: The current is about 3 knots in the entrance to the port when the river is in flood.
ANCHORAGE: Vessels which are unable to moor alongside because of deeper draft are anchored off the wharf.
BERTHING: The wharf at Cap Haitien was constructed by the Compania Industrial Maritima. The construction is in reinforced concrete. It extends for a length of 900 ft. in an Easterly direction and comprises 3 sections. The most important section is 600 ft. long and has berths for deep sea vessels on the South side in depths of 30 ft. The Western section, nearest the shore, is 300 ft. long with variable depths of 7 to 9 ft. alongside, with berths for motor vessels of small tonnage and sailing ships. The central section accommodates the customs offices. 2 metal warehouses border the East and West ends of the wharf. Between the warehouses is 1 fixed crane of 30 tons capacity.
FRESH WATER: Fresh water is available at Cap Haitien.
FUEL: Available, only in drums.

MIRAGOANE: 18.25 N. 73.04 W.

GENERAL: For all general information refer to "Port-au-Prince".
BERTHING: The facilities at Miragoane are 1 small jetty for loading and discharging general cargo with a depth alongside of 18 ft. max.

There is a wharf for loading bauxite, belonging to the Reynolds Company, with a depth alongside of 34 ft. Total annual export about 350,000 tons.

PORT-AU-PRINCE: 18.33 N. 72.21 W.

APPROACHES: The port of Port-au-Prince is situated at the extreme S.E. of the bay. It can be approached from the North and from the South by 2 channels.

One may approach from the N.E. by the Saint-Marc channel or from the West by the Gonave channel, between Trou-Forban Point and the village of Ca-Ira. The bay extends between Trou-Forban Point in the North and the village of Ca-Ira about 20 miles to the South. The position of Ca-Ira is 18° 32′ N. 72° 39′ W. From Ca-Ira the South coast of the bay extends about 2 miles N.E. and about 12 miles East to Pointe Lamentin.
PILOTAGE: Pilotage is compulsory for all movements of ships in the port. The Pilot boards to the West of the fairway buoy and is accompanied by port officials, i.e. Port Doctor and Representatives of Immigration, Police and Customs. These officials insist on using the accommodation ladder to board the vessel. Masters must arrange with their respective Agents the time which they will require a Pilot to leave the port. If they are ready to depart before the hour arranged they may call the Pilot by 3 blasts of the ship's whistle.
ANCHORAGE: Vessels must anchor to the West of the large red buoy number 29 or at the quarantine buoy, situated about 0.5 mile N.N.W. of buoy number 29. A bottom of sand over coral is to be found all over this region in depths of 10 to 18 fathoms.

Vessels may anchor or depart at any hour of the day or night.

In order to facilitate the rapid movement of vessels, these are normally anchored in order of arrival.
WEATHER: The Bay of Port-au-Prince is nearly always calm except at certain times of the year; for example, during the months from May to November, occasional strong winds may interrupt normal loading and discharging movements.

A light breeze from the East or N.E. blows after dawn, but in the afternoon a breeze 3 times stronger blows in the opposite direction.

The height of the tide is only 1.5 ft. Currents in the port are almost negligible, except that, when mooring or unmooring a vessel, one should pay attention to a Northerly current of about a quarter of a knot.
RADIO: All deep-sea vessels which enter the territorial waters of Haiti are obliged to advise the Port Radio Station.

The radio station is situated at the Bureau de Port. It is in operation 24 hours a day.

Visual light signalling may also be carried out as far as it is possible to do this.

The following apparatus is used at the radio station:

1. VHF calls to be on Channel 16. Channel 12 is also monitored continuously. Channel 6 and 18 are also available on request to the radio operator (Channel 16) Power 50 watts, range 40 miles.
2. Medium frequency, SSB compatible frequencies 2182 kHz, 2738 kHz. Power 150 watts, range about 250 miles.

In addition to the VHF Channels, the Pilots may use radio-telephone on the following frequencies: 2182 and 2738 kHz.

The general call and distress frequency 2182 kHz is monitored continuously.

All messages addressed to the Port Authorities and messages concerning pilotage must be handled at this radio station.

Masters are particularly required to give the radio station, as soon as they arrive, the following information:

Vessel's draft and net tonnage, amount of cargo for discharge, number of gangs required.

The telephone number of the radio station is 24773.

TUGS: The port has at present a tug of 2,000 h.p. available at all times. The tug is compulsory for ship from 990 tons gross and upwards. At all times 2 wooden mooring launches, each 32 ft. long, are available for Pilot's use.
BERTHING: For passenger cruise liners there is a concrete finger pier, length 888 ft., with berths on both sides, with depth alongside of 30 ft.

The old commercial quay is under reconstruction and is expected to be available by January 1979.

The New Port facilities are presently in service, located 600 ft. North of and parallel to the existing pier.

Prime features of new facilities are:

Length of berthing space: 1,400 ft.
Width of apron 93 ft.
Container crane on rails on the apron with 30 tons capacity.
Depth alongside 33 ft.

1 additional ro/ro platform. 2 metal and concrete, clear span transit sheds, each 6,000 sq. ft. Paved open storage and roadways approximately 25 acres.

There is an angular portion of 100 ft. between Quays No. 1 and 2 which may not be used for mooring, but which the bow of the ship may overhang. Vessels must be secured by at least 2 mooring cables at the bow and at the stern.

The Port Authorities require for vessels manoeuvring in the port a minimum of 2 ft. of water under the keel. This regulation may be modified by special authorisation of the Chef de Port.

In addition to the public pier, there are 5 jetties belonging to private companies used for handling products in bulk. These jetties belong to the following companies:

A. La Hasco, sugar refinery established at Port-au-Prince.
B. La Minoterie, flour mill situated at Laffiteau.
C. Le Ciment d'Haiti SA, cement factory situated at Fonds Mombin.
D. Jean Ackmed, fuel installation situated at Simonette.
The above jetties are established on the North side of the bay.
E. Installations of Shell Company and Tropigas on the South side of the bay, equipped with their own mooring buoys for tankers.

CARGO HANDLING: For vessels loading and discharging at the public pier, cargo is transported on railway trucks of 25 tons max. capacity.

1 quay is equipped for container ships. 1 quay is equipped to handle roll-on/roll-off traffic.
STEVEDORES: Loading and discharging of ships is carried out by gangs of private workers who are engaged by the ship's Agents under the supervision of a chief stevedore. The working gangs use the ship's own equipment for loading and discharge.

Handling rates are normally about 15 t.p.h. for general cargo, or about 25 t.p.h. for heavy articles, such as drums, planks, bundles of steel rods, etc.

Normal working hours in the port are from 0700 hrs. to 1900 hrs. from Monday through Saturday. Overtime is payable for work required at other than these hours and also for work required on Sundays and holidays.
FRESH WATER: Drinking water is available in the port; however, the ship must provide its own connections. Rate of loading varies from 4 to 10 t.p.h.
FUEL: There is no service for coal bunkers. Fuel oil may be supplied by tanker truck.
REPAIRS: There are no proper facilities for ship's repairs although minor repairs may be effected by small private workshops ashore. There is a small dry dock at Bizoton about 1 mile from the port, with a capacity of about 1,000 tons and able to receive vessels up to 175 ft. in length. This yard is managed by the Haitian Army Coast Guard.
MEDICAL: There are adequate medical facilities, pharmacies and hospitals.
AIRPORT: An international airport for jet planes connects Haiti with Principle U.S. and Carribean points. A local air service connects Port-au-Prince with principal towns of the Republic.
FIRE-FIGHTING EQUIPMENT: The Port Authority does not own any equipment for fire-fighting or assisting vessels in need. However, there is a town fire service organised by the Army.
HOLIDAYS: *Legal Holidays:*

Independence Day (1st and 2nd January); Labour Day (1st May); Flag Day (18th May); Ascension Day; Assumption (15th August); All Saints (1st November); Commemoration Day (13th November); Discovery of Haiti (5th December).

Authorised Holidays:

Lundi-Gras (half-day); Mardi-Gras; Good Thursday; Good Friday; Pan-American Day (14th April); President's Day (22nd June); Dessaline's Anniversary (17th October); United Nations Day (24th October); Fete des Morts (2nd November).
SERVICES: Fresh provisions are obtainable locally.

There are no facilities for refuse collection, but nevertheless it is forbidden to throw refuse, cinders or any other polluting material overboard.

Launches used for the transport of tourists are available at Port-au-Prince and these are operated by private companies. The Port Authority does not take an active part in the traffic of tourist passengers. Those who disembark on the wharf from cargo vessels or cruising liners must make their way on foot to the taxi station to take part in excursion tours. However, the majority of tourists coming on passenger liners anchored in the roads disembark by launches belonging to the Department of Tourism. They disembark at the Quai Colomb, which is under the authority of the Department of Tourism.

DEVELOPMENTS: New port facilities are presently under construction, located 800 ft. North of and parallel to the existing pier.

SHIPMASTER'S REPORT: 1975.

Documents:

Clearance from last port.
4 Crew Lists.
4 Passenger Lists
2 Cargo Manifests
18 Cargo Check lists
International Declaration of Health
Vaccination/Inoculation List (1) with valid dates.
International Vaccination Cards, these may be examined by Port Health.

Pilotage: Compulsory, 24 hour service arriving/departing. Require ETA to Agent 24 hours in advance. Pilot Station may be contacted on voice radio 2182 kHz, 2738 kHz and VHF Channels 16 and 12. Pilots board at quarantine anchorage buoy. Pilot boat has yellow hull and superstructure, 2 ft. freeboard. "Pilot" clearly painted on hull.

Anchorages: The harbour affords good anchorage in depths of 5 to 14 fathoms, clear of the entrance ranges southward. The Quarantine Anchorage is located about 2.5 miles East-northeastward of Pointe Lamintin.

Restrictions: See Sailing Directions for Prohibited Anchorages.

Max. Size: This ship is 495 ft. in length, with 69 ft. beam, we were accommodated easily. Passengers ships of 620 ft. in length are regular callers at the port. Maximum depths at the pier is 30 ft. Mean High Water Interval at the port is 08H 23M. Spring tides rise 1.5 ft. Currents in the approach set East in the Canal de la Gonave, and Northwest in the Canal de Saint Marc. All buoys, lights, and navigation aids are unreliable.

Health: Pratique is now granted at the dock. Ship displays "Q" flag until cleared.

Radio: ETAs to Agents/receivers are best sent through WNU (Tropical Radio) at New Orleans, Louisiana or ITT station at Lantana, Florida, these stations then telex direct. Port Pilots will relay messages to Agents on voice radio 2738 kHz. Short range reception on voice radio has been experienced.

Berthing: Main pier, has 1,700 ft. of berthing space on its Southern side with depths of 18 to 29.5 ft. Ship's always berth port side to, using the starboard anchor to assist in docking and undocking. A T-head pier with a pipe-line is located 2 miles Westward of the city. Mooring buoys lie off the end of this pier. It has been reported, (unverified) that this pier accommodated a tanker 560 ft. long, with a draft of 31.5 ft. in 1957.

Stevedores: Advise Agent tons per hatch at least 24 hours prior to arrival. Maximum amount of labour is available. Rate of discharging/loading is approximately 18 to 30 tons per gang hour on sacks, bales, cases, general cargo. Work after midnight is overtime with charges quite high.

Medical: Give Agent prior notice for any required medical attention. 3 hospitals available. Minor dental work can be accomplished. International Certificates with Cholera and Smallpox are required.

Density: 1025 as per this ship's test.

Fresh Water: None available at this time.

Fuel: None available at this time.

Developments: A 25 million dollar port expansion and construction project commenced October 1975 and should be completed October 1978. This new area is located 800 ft. North of the general cargo pier. From the shore in a Westerly direction the new pier shall extend 1,685 ft. in length, 469 ft. in width, with a working apron on the South side 81 ft. from the end of the ship's side. The pier will contain 2 warehouses; one 207 by 1,101 ft., and the other 180 by 447 ft. The Eastern end shall have 2 separate roll-on/roll-off sections. A container crane on rails shall traverse the entire South side working apron, capable of loads not to exceed 30 long tons. Dredging and filling has commenced and they are working towards a 30 ft. maximum depth at completion.

Gangway/Deck Watchmen: Cost unknown, supplied by Agent. Gangway watchman is recommended. If transit cargo is pilferable, I recommend using crew members for cargo hold security.

Hatches: (Automatic hatches) opening/closing normally carried out by stevedores with crew member supervision.

Customs Allowances: Bonded stores were not sealed, store lists were not required. Ship allowed each crew member 200 cigarettes. Local Customs Officials make no special requirements.

Cargo Gear: All loading/discharging by ship's gear. Fork lifts are available. There is a shortage of pallets and railroad flat cars which are used to accept cargo direct from the ship's gear on the dock. Warehouse space is limited.

Identification Cards: Shore passes not required, none issued by local authorities.

Consuls: United States of America; Panama; Lebanon; Republic of China, France.

Repairs: No facilities available.

Dry Docks: None available.

Repatriation: Possible.

Airport: 1 major airport. Located 40 minutes from the port area. Daily flights to North America. (Miami and New York)

Time: GMT plus 5 hours. No alterations to clocks during the year.

Holidays: December 5th Columbus Exploration Day; Christmas, New Year's Eve, New Year's Day. Cargo work can be arranged on most holidays at overtime rates.

Police/Ambulance/Fire: Utilise Agent for emergencies of this type, or have watchman make use of telephone from dock. "Fire". There are no international hose fittings on the dock, and limited means of handling shipboard fires from ashore.

Telephones: None available for placement on board the ship.

Services: Special services non-existent.

Shore Leave: Crew members are allowed ashore. No curfews, no passes required.

Port Regulations: Nothing unusual or out of the ordinary.

Delays: Possible berthing delays exist due to ship congestion. Delays in discharging may occur due to lack of warehouse space, pallets, or rail cars.

Agents: Agents and most officials including watchmen and stevedore supervisors speak English. All official documents and ship's clearance papers are written in French. The language spoken is predominately French (patois) with inflections that are easy on the ears, but difficult to utilise operationally.

AUTHORITY: Administration Portuaire de Port-au-Prince.

NOTES

Please also advise Shipping Guides Ltd.

Honduras

AMAPALA: 13.18 N. 87.39 W.

DOCUMENTS:

Maritime Declaration of Health.
Crew List, 3 legalised and 7 copies.
Provisions List, 3 legalised and 7 copies.
Passengers Disembarking List, 3 legalised and 7 copies.
Passengers in Transit List, 3 legalised and 7 copies.
Voyage Memorandum, 6 copies.
Cargo Manifest, 2 legalised and 14 copies.
Cargo Tally Books, 15 copies.
Mail List, 4 copies.

Documents are legalised at loading port by Honduran Consul or consul of friendly nation. If no consul, then by the Port Captain. 2 copies of Cargo Manifest, Freight List, Bills of Lading, and Stowage Plan should be airmailed to Agent in advance.

If documents legalised by the Port Captain, 1 copy of each manifest should be sent by airmail to "Secretaria Economia y Hacienda Tegucigalpa", and "Custom House, Amapala".

Shipmaster's report: Papers required for entering as follows:
10 Spanish Crew Lists with I.D. Nos.
10 Passenger Lists.
10 Store Lists.
3 Memorandum of Voyage.
1 Maritime Declaration of Health.
5 Mail Reports (only if carrying mail).

I.D. books asked for and checked with crew list. Bond not sealed. Shop not sealed.

PILOTAGE: Pilot available, to be ordered by Agent in advance.

ANCHORAGE: Open anchorage area in depths up to 32 ft.

RESTRICTIONS: Vessels enter and leave at high water only, max. recommended draft 28 ft.

MAX. SIZE: Vessels up to 10,000 g.r.t. have entered, with 30 ft. draft.

HEALTH: Vessels are cleared by Health Inspector on arrival. International Health regulations apply.

RADIO: Contact via "Tropical Radio".

TUGS: None available.

VHF: Agents on Channel 10.

STEVEDORES: Arranged by Agent. Working hours 0700–1200 hrs. and 1300–0700 hrs.

MEDICAL: No hospital facilities. Only minor cases can be dealt with locally.

FRESH WATER: Not available.

FUEL: Not available.

IDENTIFICATION CARDS: Not required.

CONSULS: Nicaragua, represented locally.

REPAIRS: Not possible.

TIME: GMT minus 6 hours, no alterations during year.

SHORE LEAVE: Allowed, no restrictions.

SHIPMASTER'S REPORT:

(1) I found that the safest approach is through the passage between Isla Conchaguita and Isla Jeanguera. It is also the best place to anchor and wait for a Pilot.

(2) The Charts covering this port do not appear accurate, and no further approach towards Amapala should be made without the guidance of a Pilot or a boat.

(3) There are no buoys.

(4) The passage from anchorage towards Amapala along the West Coast of Isla Del Tigre is very narrow and water depth recorded by ship's soundings gave only 24 ft. in places, with a maximum of 30 ft. There is room only to swing the ship on her axis.

(5) Pilot is available, or otherwise there is a boat guiding vessel into Amapala.

(6) Cargo operations are performed at anchorage about 3 cables from Amapala. Cargo is discharged into barges. Stevedores are not very professional and cargo damage may be expected. Many stevedores work in bare feet and thus accidents on board may be expected.

AUTHORITY: Port Commander.

AGENT: Servicios Portuarios S.A. de C.V. Cables "Seposa Amapala."

HENECAN: (Under construction)

New pier port at Henecan, (Gulf of Fonseca) Pacific Coast of Honduras with following details:

Location: On the mainland of the Pacific Coast of Honduras at a distance of about 20 nautical miles from Amapala and at a distance of about 3 nautical miles from San Lorenzo.

Draft limit: Only vessels with a maximum sailing draft of up to 22 ft. (high tide) can call Henecan for loading. However, port authorities are expected to dredge the entrance channel up to 28 ft. (low tide).

New pier: (under construction). T-shape with an overall length of 300 m. Actual draft at pier 22 ft. However, this too is subject to dredging up to 28 ft. (low tide).

The new port is expected to be finished in 1978. Then all vessels with a draft of less than 22 ft. have to call Henecan for loading/unloading. Vessels with a draft over 22 ft. will be operated as usual at Amapala. However this is subject to change after dredging is completed (which so far is unknown). Then all vessels have to call Henecan.

At this moment a Pilot (private) is available. The Port Authorities will, however, place a licensed Pilot at the port upon completion of dredging and when all buoys have been placed. Then the Pilot will be obligatory for the entrance channel to Henecan as well as for arriving and leaving the pier.

PUERTO CORTES: 15.50 N. 87.55 W. (See Plan Book)

DOCUMENTS:

Health Declaration. 2 copies.
Zarpe or Clearance Permit from the Last Port.
General Cargo Manifest (in ballast if that is the case) of all the cargo to be discharged in Puerto Cortes, and 14 copies.
Crew List and 10 copies.
Passengers in transit, or no passenger declaration and 10 copies.
Deratisation Certificate, only in first call.
Stores List and 8 copies.
Mail Sacks declaration (negative or positive).
Bills of Ladings (if some cargo is coming) 3 complete sets.
Hatch list and 5 copies.

All the original documents must be signed and stamped by the Honduran Consul at the port before calling Honduras and should be made in Spanish.

If no consul of Honduras available, documents to be legalised by consul of a friendly nation or by the Chamber of Commerce, stating the facts.

PILOTAGE: Compulsory for vessels over 300 g.r.t. ETA to the Agent, 72, 48 and 24 hours ahead of arrival required. Pilot on VHF Channels 16 and 6.

ANCHORAGES: Once the ship enters the bay, *if no berth space has been notified to the Master*, she should anchor at a distance beyond 0.5 miles from the nearest pier, and wait for the boarding of the official party to be granted free pratique.

RESTRICTIONS: Vessels may enter the port day or night but not visited by Port Authorities between 2000 hrs. to 0600 hrs., only in special cases.

MAX. SIZE: Dry cargo vessels up to 30 ft. draft. Tankers up to 43 ft. draft.

HEALTH: Pratique granted after Port Authorities (including doctor) board vessel between 0600–2000 hrs. Pratique granted if no contagious illnesses aboard, otherwise quarantine restrictions imposed. No automatic free pratique when arriving from another port of Honduras.

RADIO: Lantana Radio WOE. New Orleans Radio WNU. Limon TIM. Balboa Radio NBA. Miami Radio WAX. Messages routed via Tropical Radio.

Port Authority operates a VHF station HQSU, monitoring on 2738 kHz, but by appointment can reply in any other position. Telegrams to be routed via Tropical Radio. Lantana WOE. New Orleans WNU. Limon TIM. Balbao BNA. Miami WAX.

Ship's radio not to be used in port except for communication with the port authority. Vessel is fined if there is a violation. Also see "VHF".

VHF: Puerto Cortes Radio: Call sign "Cortes Radio". Channel 16. *Hours:* Weekdays 0600–2200; Saturdays 0800–1200 and Sundays Nil.

BERTHING: The Agent to supply information as to berth, and time of docking. Pilot will board the vessel and berth it, assisted by a launch to hold ropes. Departure should be effected when the despatch documents are on board and operations finished.

Pier No. (Texaco Pier), for tankers or ships loading diesel or lub-oil; depth 45 ft.
Pier No. 2 (Banana Pier) length is 810 ft.
Pier No. 3 630 ft.
Pier No. 4 1,020 ft.

STEVEDORES: Vessels must give accurate ETA at least 24 hours in advance to enable Agents order necessary gangs. Gangs ordered 0700 and 2100 hrs. working 12 hours (daytime) and 9 hours (night-time) excluding the meal hours (0600–0700; 1200–1300; 1700–1800 and 2300–2330). No work on Holy Friday, May 1st (Labour Day), other holidays work is possible with double payment.

MEDICAL: No advance notice necessary for medical attention, except in very urgent cases. At San Pedro Sula (35 miles by road) you can obtain very good medical service but several medical clinics are serving this Port. No inoculations required but Master should possess International Health Cards for each member of crew.

TANKERS: Discharge at Texaco Oil Refinery, cable address "Reftexa".

DENSITY: 1028/1030.

FRESH WATER: Water available at wharf face at 100 ft. intervals. Rate, approx. 8–10 t.p.h.

FUEL: All grades available. 24 hours notice is required for good service.

GANGWAY/DECK WATCHMEN: Shore watchmen not usually required and this service left to discretion of the Master.

OPENING/CLOSING HATCHES: On liners normally by crew with assistance stevedores, otherwise according Charter Party.

CERTIFICATES: On first call, Registered Tonnage Certificate; thereafter not required unless gross/net tonnage be changed.

CUSTOMS ALLOWANCE: No restrictions, free use on board. Customs officials check no sales shore without special permit.

IDENTIFICATION CARDS: New port regulations includes identification card must be shown to gate watchman when crew members come back aboard.

CONSULS: None in the port. American Consulate at Tegucigalpa, 200 miles by road.

REPAIRS: Local marine repair companies can undertake limited repairs of general nature; pre-advice recommended.
REPATRIATION: All facilities available for effecting crew change and repatriation by sea or air.
AIRPORT: International Airport Ramon Villeda Morales served by regular airlines. 35 miles by road.
TIME: GMT minus 6 hours, no changes during year.
HOLIDAYS: January 1st; April 14th; May 1st; Thursday, Friday and Saturday in Easter week; August 15th; September 15th; October 3rd, 12th and 21st; and December 25th. Cargo work can be arranged on those days, except on Good Friday, and May 1st (Labour Day).
TELEPHONES: Not customary except in United Fruit Co. pier (Tela Railroad Company, concessionary of banana pier) where telephones connected on board. Overseas calls may be arranged by Agent.
SHORE LEAVE: Permitted without restrictions.
SHIPMASTER'S REPORT: September 1978.
Pilotage: Pilotage compulsory. Pilot boards 2-4 cables off the berth, advance notice of 72, 48, and 24 hours required.
Restrictions: Vessels can enter and leave at any stage of the tide day and night. Vessels are able to leave the berth in an emergency without use of Pilot if the Ro-Ro berth is vacant and a tug available. Least depth of water in channel from sea to berth about 50 ft.
Max. Size: LOA 600 ft. Depth of water at banana berth is 33 ft. forward and 38 ft. aft. Max. draft 30 ft. There is a shoal patch about 150 ft. ahead of the berth.
Health: Authorities require 72, 48 and 24 hours notice of arrival.
Radio: Radio stations used when approaching the port were "WNU" and "TIM".
VHF: Port Authority, Pilot and Agent on Channel 16. Channel 14 also available.
Tugs: There are 2 tugs available, each 1,250 h.p. Vessels are able to dock and undock without the use of tugs.
Berthing: Banana Pier – position 15° 50.05′ N., 87° 57.35′ W. Distance from berth to entrance 2 miles. The nature of bottom at the berth is coral, mud and sand. Prior to arrival it is an advantage to have all derricks up as various equipment has to be brought on board.

Always starboard side alongside, starboard side banana lids can be opened on all decks prior to arrival.

The banana elevators are extremely close to the quay side and usually moved to the East end of the berth for docking purposes, but as vessel is making fast they are moved into position. Leave starboard gangway turned in until alongside and elevators moved. It is a good idea to turn in overside light fittings and on no account have a starboard list. The bollards are situated on the edge of the quay. The quay is concrete with wooden face, only about 1.5 ft. above the water.

Fresh water was limited due to recent hurricane and repairs to the water line, however 100 tons was obtained.

Four elevators used for loading. Work carried out around the clock, best hatch rate 48 t.p,h,

Ro-Ro facilities available, vessel moors with 2 anchors and stern to the quay. There are facilities for handling containers. Presently the container area is being expanded.
Currency: Lempiras. Two to the U.S. Dollar. If cable sent in advance U.S. Dollars can be obtained.
Diversion: Agents request, if diverted to a Honduran port, a diversion cable must be sent to the Agents of that port giving time/date/nationality/port of departure/and ETA. (This helps Agents with the documentation).
Medical: Doctor and hospital available.
Tankers: The Texaco Pier accepts tankers with a draft of 43 ft.
Fresh Water: Available.
Fuel: Bunker fuel, diesel oil and lubrication oils available.
Density: 1025.
Repairs: Facilities available for small repairs.
Surveyors: Available.
Services: Fresh provisions, groceries, meats and laundry services available. Contract work such as deck and engine room cleaning and painting can be undertaken, however, prices of contractors should be compared.

TELA: 15.47 N. 87.30 W.

DOCUMENTS:

1 original clearance
1 ,, Health Certificate.
1 ,, 16 copies Manifest.
1 ,, 11 ,, Cargo Book.
1 ,, 9 ,, Store List.
1 ,, 9 ,, Crew List.
1 ,, 9 ,, Passenger List.
1 ,, Baggage.
1 ,, Voyage Memorandum.

All documents must be in Spanish; Cargo Book should be in alphabetical order.
PILOTAGE: Pilot available if requested. There is a small boat that assists docking by handling mooring lines from vessel to wharf. 48 hours advance notice of ETA required.
ANCHORAGES: 1 mile out from wharf, 100 ft. or more; no boundaries.
MAX. SIZE: Max. permissible length 485 ft., breadth no restrictions, draft 30 ft.
HEALTH: Agents arrange pratique; in case of disease or fever aboard, the vessel will be placed in quarantine for a minimum of 5 days.
RADIO: WNU New Orleans and TIM Puerto Limon via Tropical Radio.
TUG: No tug available.
BERTHING: Time for berthing is from 0600 to 2000 hrs.
General Cargo Berth: East side of pier, starboard side alongside.
Banana Berth: West side of pier, port or starboard side alongside, depending on which side elevator space is required. 4 elevators available, type camel back. Rate per elevator 3,500 boxes per hour.
STEVEDORES: ETA advice should be given 48 hours prior to arrival in order to arrange gangs. Labour rates are subject to surcharge of 25%, 50%, 75% and 100% to cover overtime, depending on hour or day worked.

Gangs: For bananas: 180 men, 3 gangs. General cargo: No restrictions.
MEDICAL: Hospital facilities available, also inoculation, vaccination and certificates.
TANKERS: Discharging lines only, crude 12 in., diesel 6 in., spray oil 6 in. Berth available for 1 tanker, max. permitted draft 30 ft.
DENSITY: Average density in port is 1029.
FRESH WATER: Delivered by hoses at rate of 100 gallons per minute.
FUEL: Available, rate 250 t.p.h.
FIRE PRECAUTIONS: Extinguishers and water hoses available.
GANGWAY/DECK WATCHMEN: Watchmen can be obtained at day-time rates plus 25%, 50%, 75% and 100% to cover overtime, depending on the hour or day worked.
OPENING/CLOSING HATCHES: Work done by stevedores.
CERTIFICATES: Health and deratisation certificates needed.
CUSTOMS ALLOWANCES: 1 carton cigarettes and 1 bottle wine or spirits for each man.
CARGO GEAR: Must have current valid certificate for ship's gear.
IDENTIFICATION CARDS: Cards needed.
CONSULS: None.
REPAIRS: Only minor repairs.
REPATRIATION: Repatriation can be made on request by Master.
AIRPORT: Distance from wharf to airport is about 80 km. served by regular airlines; 4 flights per day which connect with Panamerican every day.
TIME: GMT minus 6 hours.
HOLIDAYS: January 1st, work possible; April 14th, work possible; May 1st, work possible; September 15th, work possible; October 3rd, work possible; October 12th, work possible; October 21st, work possible; December 25th, work possible. Thursday, Friday and Saturday of Holy Week – work possible except Friday.
POLICE/AMBULANCE/FIRE: Contact telephone operator.
TELEPHONES: No facilities for placing telephones on board.
GENERAL: Ships must have Honduran flag on board.
SHORE LEAVE: Crew members allowed ashore, providing they do not have any diseases.
DELAYS: Delays can be expected any time there are 2 ships docked.
AUTHORITY: Port Commandant – Chief of Customs.

NOTES

Please also advise Shipping Guides Ltd.

Hong Kong

HONG KONG: 22.18 N. 114.10 E. (See Plan Book)

HARBOUR LIMITS (Approximately): Western Entrance – the N.S. line between S.E. extremity of Tsing Yi Rock and the flashing light at S.W. corner of Green Island. Eastern Entrance – the N.E./S.W. line between the on-shore FL.W and the FL.R lights either side of the Lei Yue Mun Pass.

DOCUMENTS:

Marine Department (arrival)

Marine Department Shipping Report (Form MO. 144).
Certificate of Registry.
Passenger ship: Safety Certificate.
Passenger or cargo ship: Load Line Certificate.
Cargo ship: Radio Certificate.
Cargo ship: Safety Equipment Certificate.
Cargo ship: Safety Construction Certificate.
Ship's Articles of Agreement with the crew (if the ship is British, or is a foreign ship belonging to a nation not represented by a consul in Hong Kong).
Derating Certificate or Derating Exemption Certificate.
1 copy of the ship's Passenger List (if specifically requested).
Clearance Certificate from the Last Port.
1 copy of the Import Cargo Manifest (if specifically requested).
5 copies of the Dangerous Goods Manifest (if applicable).
Compulsory Insurance Certificate (Tankers).

Note: All the above documents/forms must be submitted to the Ocean Shipping Control Section of the Marine Department within 24 hours of a ship's arrival with the exception of the Dangerous Goods Manifest which should be submitted at least 48 hours prior to the vessel's arrival.

Marine Department (departure)

Application for Port Clearance (Form MO. 7).
5 copies of the ship's export Dangerous Goods Manifest (if specifically requested).
1 copy of the ship's Export Cargo Manifest (if specifically requested).

Port Health Officer (arrival only)

Maritime Declaration of Health.
1 copy of the ship's Passenger List.
1 copy of the Crew List.
Derating Certificate or Derating Exemption Certificate (whichever is applicable).
International Vaccination Certificate against smallpox for each passenger and Crew member on board who has, within the preceeding 14 days visited a smallpox infected country.

Note: The above documents/forms must be produced for the inspection of the Port Health Officer on boarding at the quarantine anchorage.

Department of Commerce and Industry (arrival and departure)

2 copies of the ship's Import/Export Cargo Manifest. 1 copy for Manifest Check Section, Trade Licensing Branch, 14th Floor, Ocean Centre and the other 1 copy for Manifest Section, Industry and Economic Division, Census and Statistics Department, 20th Floor, Kai Tak Commercial Building.
1 copy of Import/Export Statement in respect of dutiable goods (Forms TIC 309 and TIC 309A).
2 copies of the declaration in respect of dutiable stores required during a vessel's stay in port (Form TIC 303).

Immigration Officer (arrival)

2 Transit-Passenger Lists.
2 Landing-Passenger Lists.
3 Crew Lists.

Note: The above forms must be produced for the inspection of the Immigration Officer on boarding after the ship has been 'cleared' by the Port Health Officer.

(departure)

2 Lists Passengers boarding.
2 Lists Transit Passengers.
2 Crew Lists.

Post Office (arrival only)

1 copy of the Ship's Mail Manifest.

Hong Kong Police

1 copy of The List of Arms and Ammunition on board (Nil return required) to be handed in at the Entry and Clearance Office with Marine Department papers.

ARRIVAL ADVICE: On entering Hong Kong waters shipmasters should contact MARDEP on VHF Channel 12, and report their position, ETA at Pilot station, final berth, and intended route inwards, East or West. If entering from the East then the vessels mast height above the water should also be reported. (This is needed for information to the airport where the runway extends close North of the Hung Hom fairway). Shipmasters are also asked to report any other relevant information such as dangerous goods on board. If the vessel is taking a Pilot, reference should be made to the 'Sailing Directions' in the China Sea Pilot Vol. I, with regard to the positions of the Pilot stations, and Pilots should only be embarked or disembarked at these points. Additional radio reports to MARDEP during the vessels inward or outward passage aid in the safe movement of all vessels in the port and approaches.

APPROACHES: A. (Dry-cargo vessels): The approaches are reasonably free from hazards and are well marked by day and night. Vessels working at buoys with drafts up to 36 ft. are requested to enter port via the Western Entrance. Other vessels with drafts up to 36 ft. by Lei Yue Mun entrance.

B. (Tankers): The tankers which berth at the Esso Company installation at Tsing Yi, and at the Mobil installation, also at Tsing Yi enter the harbour, but with the exception of the approaches to the Esso Terminal which was specially dredged for the purposes of accommodating vessels at 42 ft. draft, there is no limitation on depth save that at the individual berth.

C. Buoyage. The system of buoyage used in Hong Kong harbour conforms to the uniform system of maritime buoyage adopted by the lighthouse authorities in Britain. The main stream of flood tide within the harbour limits is from East to West and buoyage is laid accordingly. Several terrestrial navigational beacons within the waters of Hong Kong are also painted to conform with the uniform system of maritime buoyage.

Compulsory traffic separation lanes are in force for both the East and West approaches. Up-to-date Admiralty charts should be consulted for details.

PILOTAGE: Although pilotage is not compulsory in the port, Pilots licensed by the Pilotage Board are available to board ships at either entrance on request. The Hong Kong Pilotage Association, provide pilotage services. Pilots generally board in-bound ships using the Eastern entrance in the vicinity of the Lei Yue Mun turning buoy (Lat. 22° 16.4′ N. Long. 114° 16.3′ E.) and disembark at the same point from outward-bound ships. At the Western entrance, Pilots embark and disembark to the West of Green Island. It is a contravention of regulation 3(1) of the Merchant Shipping (Control of Ports) Regulations, for any vessel to pick up or discharge a Pilot within a distance of 7.5 cables from the centre of either the Lei Yue Mun Pass or Sulphur Channel. Maximum speed inside harbour, 8 knots.

ANCHORAGES: Examination anchorages (quarantine and immigration) for clearance inwards are situated within the harbour limits to cover the entry of shipping from East and West. The principal dangerous goods anchorages are situated at the Western end of the harbour and at Pun Shan Sek (tankers), whilst there are others at Junk Bay, Tsuen Wan and Rocky Harbour.

An anchorage for the discharge of logs has been designated. This was necessary because logs, which were being discharged and stored within harbour limits were endangering small craft, waterside installations and navigation.

The Western examination anchorage works 24 hours a day whereas the Eastern examination anchorage works from 0700–1800 hrs.

See also "Shipmaster's Report"

MAX. SIZE: Largest vessels calling regularly have been, dry-cargo: container vessels, length 965 ft., with drafts up to 40 ft.; tankers length 776 ft., draft 42 ft. Maximum size governed by draft of vessel. No limit as to length and beam. Draft in harbour: "A" class buoys 22 ft. to 37 ft. "B" class buoys 19 ft. to 28 ft.

PRATIQUE: *Conditions under which a vessel may be granted radio pratique:*

(a) The vessel must not have called at a smallpox and/or plague infected port within 14 days prior to arrival at Hong Kong.

(b) If the vessel has called at a cholera-infected port within 5 days prior to arrival at Hong Kong, the Chief Port Health Officer or his delegated officer has full discretion in the granting of radio pratique.

(c) There are not more than 24 passengers on board at the time of arrival.

(d) A vessel carrying more than 24 passengers may be granted radio pratique if there is a ship's surgeon on board.

(e) The Master must furnish, through his shipping company or Agent, the following cabled information to the Port Health Office not more than 30 hours and not less than 8 hours before his expected time of arrival at Hong Kong:

(i) ports of call with dates of departures during the 14 days prior to arrival;
(ii) numbers of passengers and crew members on board;
(iii) a statement that all persons on board are healthy and in possession of valid International Certificates of Vaccination against smallpox for those who, within the preceeding 14 days have visited a smallpox infected country;
(iv) a statement indicating whether any case of infectious disease has occurred on board during the voyage;
(v) whether any person on board is sick;
(vi) the date of issue of the Deratting or Deratting Exemption Certificate;
(vii) whether the ship is an oil tanker, a cargo ship, a container ship or a LASH ship; and
(viii) whether foodstuffs are carried as cargo on board ship.

Notes:

1. Applications for radio pratique must be made by shipping companies or Agents. Application forms should be sent to Port Health Office, Li Po Chun Chambers, First Floor, Des Voeux Road, Central, during normal office hours (0900 to 1700 hrs. on Mondays to Fridays and 0900 to 1300 hrs. on Saturdays).

2. For urgent cases outside normal office hours, shipping companies or Agents may apply for radio pratique by telephone to the Port Health Office, Hong Kong Airport (Tel. 3-829284) during the following hours:

Mondays to Fridays	1700 to 2300 hrs.
Saturdays	1300 to 2300 hrs.
Sundays and Public Holidays	0900 to 2300 hrs.

All necessary information together with supporting documents must be submitted later in writing to Port Health Office, Li Po Chun Chambers.

3. No radio pratique will be granted between 2300 and 0900 hrs.

4. When radio pratique is granted, shipping companies or Agents will be responsible for notifying the Master concerned.

5. The granted radio pratique will automatically expire 24 hours after the stated expected time of arrival at Hong Kong.

6. The granted radio pratique will no longer be valid if there is any change in the health status on board the vessel concerned during the period from the submission of the application to the actual time of arrival of the vessel at Hong Kong. This means that the Master of the vessel concerned will have either to re-apply through his shipping company or Agent, giving the additional information, or to display the appropriate signal when approaching the Quarantine Anchorages:

Day: International Code flag "Q"

Night: A red light over a white light in a vertical line, 6 ft. apart.

7. Ships granted radio pratique will be required to display the following signal when entering Hong Kong waters:

Day: International Code flag "T.O."

Night: 3 white lights in a vertical line, 6 ft. apart.

8. Maritime Declaration of Health and Passengers and Crew list will have to be collected by the shipping companies or Agents and delivered during office hours to the Port Health Office, Li Po Chun Chambers within 24 hours of the ship's arrival.

IMMIGRATION: Immigration formalities take place at the Eastern or Western examination anchorages after clearance by the Port Health Authorities. Immigration launches are on duty 24 hours a day in the Western anchorage and from 0630 to 1800 hrs. in the Eastern anchorage throughout the year.

RADIO: Cable Agent via Radio Hong Kong call sign "VPS".

Signal Stations. 4 signal stations operated by the Marine Department are situated in the Eastern and Western approaches to, or within, the harbour limits as follows:

Eastern approaches: Waglan Island, (Lat. 22° 11′ N., Long. 114° 18.1′ E.). Western approaches: Green Island (Lat. 22° 17.2′ N., Long. 114° 06.6′ E.).

Marine Department Port Communications Centre, Lat. 22° 17.4′ N. Long. 114° 9.0′ E. North Point Signal Station, Lat. 22° 17.7′ N., Long. 114° 11.9′ E.

These stations are manned 24 hours a day throughout the year and contact can be made by means of international code flags or by signal lamp. In addition, the Marine Department Headquarters Signals Station can be contacted by VHF radio-telephone on Hague Plan Channel 12. Communication between the stations is provided by radio, land-line telephone and a teleprinter circuit. Telex: Marine Department Port Communication Centre is equipped with telex No. 63607. Answerback MARDEP HX.

It is mandatory for the Master of every ship arriving within signalling distance of any of the above signal stations to hoist the national colours and (if one shall exist) the house flag and the signal letters of the ship, and to identify the vessel to the signal station by visual signals if requested. On recognition of a ship in the approaches to Hong Kong, the name is immediately relayed to the Port Control Office of the Marine Department, and the ship's owners or Agents can be notified on request.

Wireless Telegraphy: Radio communication apparatus on board a merchant vessel is not permitted to be used while the vessel is within Hong Kong territorial waters except in the following circumstances:

When a vessel is proceeding through Hong Kong territorial waters such apparatus may be used to communicate on minimum power with the nearest coast station or, if communication with the nearest coast station is impracticable and the safe navigation of the vessel so requires, with a more distant coast station or another vessel;

For the purpose of summoning assistance on an occasion of danger to the life of any person or to the vessel;

For the purpose of carrying out experimental tests for which permission in writing must first be obtained.

During the period when tropical cyclone signals 8, 9 or 10 are in force, radio and television stations will extend their hours of operation around the clock, and will undertake broadcasting of tropical cyclone warnings in English and Chinese, at two minutes to the hour and half past the hour. Should the expected local conditions so warrant, warnings will be broadcast at quarter to and quarter past the hour. Warnings in English will be broadcast by individual announcers at each station. Radio Television Hong Kong and Commercial Radio will provide a Chinese announcer to broadcast warnings in Chinese from the broadcasting studio at the Royal Observatory.

If conditions are expected to worsen, tropical cyclone warnings may continue after the normal close down time of the stations, or commence before the usual starting time in the morning even though only the No. 1 signal is in force at that time. After consulting the Director, Royal Observatory, the Director of Broadcasting will decide whether or not to adopt either of these courses. He will inform Commercial Radio, HK-TVB, RTV and CTV of his intentions as early as possible.

Frequencies: Radio Television Hong Kong – Radio 1 (Chinese) 640 kHz: Radio 2 (Chinese) 94 mHz, 103.5 mHz, 103.1 mHz; Radio 3 (English) 545 kHz; Radio 4 (English) 91 mHz, 100.5 mHz, 100.9 mHz; Radio 5 (English) 96 mHz, 105.5 mHz. Commercial Radio – English Service 1050 kHz; Chinese Services Channel 1, 850 kHz, Channel 2, 610 kHz."

VHF: Control Station, Hong Kong Port Radio call sign "Mardep" Channel 12, 24 hours listening watch. Range up to 35 miles.

Maritime VHF Radio-telephone Service (Hague Plan): This service operates in Hong Kong on 2 international channels, Nos. 16 and 26. Channel 16 (156.8 mc/s) is the simplex distress and calling frequency on which contact is made between shore and ship before changing over to the public correspondence channel, No. 26. The latter is a duplex channel and Hong Kong transmits on 161.9 mc/s and receives from ships on 157.3 mc/s.

Local connection to the service is *via* the Hong Kong Telephone Company and is made in the same way as for overseas radio-telephone calls by dialling "100". The local operator should then be informed that a telephone call is required on "the Maritime VHF Hague Plan Service". The operator will ask for details of the call, such as the name of the ship and the person required, and will then connect the call *via* Cable Wireless. Calls can also be sent from ship to shore. The range is about 50 miles and the service is available at all times of the day and night.

Harbour phones: If requested the Hong Kong Telephone Company will install and maintain VHF radio telephones on ships at buoys in the harbour for the duration of the ships stay in port. Calls may be made between any two ships so equipped and between a ship and any telephone number on the Hong Kong Telephone Company network.

Ship to shore service: Hong Kong Telephone Company will also provide ship to shore telephone service by means of land lines at selected wharf locations. The Container Port is included.

Shipmaster's Report: VHF Channel 6 is used for search and rescue.

TUGS: Available for berthing and unberthing. Advance booking is required. See Table B.

WHARVES: *China Merchants S.N. Co. Limited* – berths suitable for coastal shipping:

		Length (ft.)	Depth (ft.)
West Point	Berth No. (1) E.	320	35
	Berth No. (2) W.	320	35
H. K. and Kowloon Wharf Co.			
	Ocean Terminal	1,250	35
	Pier No. (3) S.	600	32
	Pier No. (3) N.	600	34
	Pier No. (4) S.	700	32
	Pier No. (4) N.	700	33
	Pier No. (5) S.	800	34
	Pier No. (5) N.	800	36
North Point Wharves			
	No. (1) E.	700	30
	No. (2) W.	530	30
Kwai Chung Container Terminal			
	6 berths	1,000	40
Whampoa Terminal Ltd.		600	30

BERTHING: Berthing of dry-cargo vessels alongside wharf can be performed any time during day and night. Berthing at tanker wharf not permissible after sunset. Ships carrying explosives must obtain permission from the Marine Department before berthing is allotted.

When berthing at Kowloon Wharf signals will be exhibited on the signal station on top of the Kowloon Star Ferry pier. Code flag Y by day and 1 red light over green light at night indicates anchor and await instructions. Crossed bamboo poles on which are displayed code flags N and B, when sited at the end of a pier denotes that the vessel is required to berth stern to the praya wall.

Boatmen. Labour to handle ships' moorings lines when berthing and unberthing at any of the wharves in Hong Kong waters is supplied by the owners of the wharf concerned, the cost being included in the berthing fee. For berthing at a Marine Department mooring buoy it is usual for the ship's Agent to arrange for boatmen to handle the ship's slip wire and anchor cable, unless the ship's crew undertake this task. The services of boatmen are generally obtained through the Hong Kong Pilotage Association. For night berthing 2 boats are normally required – one to handle the wire and cable and the other to provide a lighted marker for the mooring buoy.

Mooring Buoys. See "Max. size" All ships are required to secure to Marine Department mooring buoys by their chain cable. The maximum length of a ship permitted to berth at an "A" class mooring is 600 ft., the swing circle encompassing each buoy having a radius of 700 ft. The maximum length of a ship permitted to berth at a "B" class mooring is 450 ft., the radius of swing circle around such buoys being 550 ft. It is therefore within the limits of safety for a vessel, when secured to a Marine Department mooring, to slack out to "1 shackle on the windlass" and still clear ships berthed at adjacent buoys, except in exceptional circumstances. As all Marine Department moorings are of the 1-legged type, it is permissible, should circumstances make it necessary, for a ship, when attempting to secure to a mooring, to drop an anchor at not less than 50 feet from the buoy without fouling the mooring chain. It should be noted, however, that moorings sited within the man-of-war anchorage and the Hongkong and Whampoa Dock Company's private mooring H.W.D. No. 1 in Hung Hom Bay are either of the 2 or 3-legged type, and it is therefore not permissible to use an anchor when berthing.

44 "A" class mooring buoys and 26 "B" class mooring buoys for ocean going vessels. Additionally 2 "B" class mooring buoys available at Yam O Bay, Lantan Island, for vessels with cargoes of logs.

TANKERS: Any leaking of oil to water will be subjected to heavy fines. If not gas-freed, not allowed through harbour. Max. draft for berthing 42 ft. See Table A.

Table A. OIL INSTALLATIONS

Company	*Location*	*Length of berth*	*Depth alongside (Chart Datum)*	*Grade of oil*	*Capacity (water tons)*	*Delivery rate*	*Hose connection*
(i) Shell Co. (H.K.) Ltd.	Kwun Tong	670′	34′	Boiler fuel	4,500	120	6″
				Marine diesel fuel	4,200	140	6″
	Tai Kok Tsui	180′	10′	Boiler fuel	610	20	2″
				Marine diesel fuel	220	25	2″
	North Point	140′	10′	Gas oil	1,740	27	2″
	Ap Lei Chau	900′	60′	Boiler fuel	143,000	400	10″
				Marine diesel	18,000	400	10″
				Gas oil	25,600	450	8″
(ii) Caltex Oil Hong Kong Ltd.	Tsuen Wan	700′	35′	Boiler fuel	47,820	350	10″
				Gas oil	13,600	200	6″–8″
(iii) Mobil Oil Hong Kong Ltd.	Tsing Yi	700′	38′	Boiler fuel	39,000	500	10″
				Marine diesel	26,000	300	8″
				Kerosene	17,000	300	8″
(iv) H.K. Oil Co. (Gulf Products)	Tsuen Wan	292′	28′	Boiler fuel	22,589	300	8″
				Marine diesel fuel	2,794	200	6″
	Tsing Yi	700′	40′	Boiler fuel	39,000	500	10″
				Marine diesel fuel	26,000	300	8″
Tankers use the Mobil Oil Terminal under a joint users agreement with Mobil Oil Hong Kong Ltd.							
(v) Esso Standard Oil (H.K.) Ltd.	Tsing Yi	920′	52′	Boiler fuel, Marine diesel and white oil	342,000	500	10″
	North Point	150′	10′	White oil	400	7	4″
(vi) Peninsular Petroleum Co.	Tsing Yi	700′	45′	Kerosene, Marine diesel	58,000	300	10″
				LPG – Gas Oil	50,000	600/700	
(vii) China Resources Ltd	Ngan Ying Chau	820′	40′	Boiler Fuel Marine Diesel White oil	232,900	820	12″
(viii) China Resources have a further terminal under construction S.E. Tsing Yi.							

(i) 1 tug is normally required for ships berthing and unberthing. A shore telephone is available at the berth. Shore electrical supply is not available. Fresh water available from shore and by lighter. Berthing facilities available only for small coasters, ferries and harbour craft.

(ii) 1 tug is normally required for ships berthing and unberthing. A shore telephone is available at the berth. Shore electrical supply is not available. Fresh water available by lighter only.

(iii) and (iv) 2 tugs are normally required for berthing and unberthing. A shore telephone is available at the berth. Shore electrical supply is not available. Fresh water available by lighter only.

(v) 2 tugs are normally required for ships berthing and unberthing. A shore telephone is available at the berth. Shore electrical supply is not available. Fresh water available by lighter only.

(vi) 1 tug is normally required for ships berthing and unberthing. A shore telephone is available. Shore electricity supply is not available. Fresh water available by lighter only.

(vii) 1 tug is normally required for ships berthing and unberthing. A shore telephone is available at berth. Shore electrical supply is not available. Fresh water available by lighter only.

Table B. TUGS.

Company	*Tug*	*Power (BHP)*	*Bollard Pull (tons)*	*Propulsion*
Hongkong Towage & Salvage Company Ltd.	*Hung Hom*	3,000	40	Twin Var. Pitch/ Kort Rudders
	Kwai Chung	3,400	40	Twin Var. Pitch/ Kort Rudders
	Sung Kong	3,400	40	Twin Var. Pitch/ Kort Rudders
	Heung Kong	3,000	40	Twin Var. Pitch/ Kort Rudders
	Kau Lung	2,100	39	Single Var. Pitch/ Kort Rudder
	**Lamma*	2,600	36	Twin Duck-Pellers Kort Rudders
	Tai Tam	2,600	36	Twin Var. Pitch/ Kort Rudders
	Ngan Chau	2,400	35	Twin Var. Pitch/ Kort Rudders
	Pen Chau	2,200	30	Twin Var. Pitch/ Kort Rudders
	Lai Mun	1,860	30	Twin Var. Pitch/ Kort Rudders
	Waglan	1,700	25	Twin Var. Pitch/ Kort Rudders

* Under construction

Company	*Vessel*	*Power (BHP)*	*Bollard Pull (tons)*	*Propulsion*
The Far East Towage Co. Ltd.	*Shek O*	1,000	10	Steam/Single Screw/F.P.
	Tsing Yi	440	5	Diesel/Single Screw/F.P.
	Tolo	410	2	Diesel/Single Screw/F.P.
	Tathong	270	2	Diesel/Single Screw/F.P.
	Far East No. 1	2,000	25	Diesel/Twin Screw/Kort Rudders
Victoria Harbour Tug Co. Ltd.	*Howa*	3,200	45	Diesel/Twin Screw/Kort Rudders
	Kowa	3,200	45	Diesel/Twin Screw/Kort Rudders
	Lewa	2,400	34	Diesel/Twin Screw/Kort Rudders

Company	*Vessel*	*Type*	*B.H.P.*	*Notes*
H.K. & Kowloon Wharf & Godown Co. Ltd.	*Snipe*	motor tug	140	All the tugs listed here are suitable for towing lighters in the harbour.
	Heron		205	

Table C. WATER BOATS.

Company	Vessel	Capacity	Delivery (Approx.)
Leung Tai Kee Waterboat Co. Ltd.	Taikee No. 1	150 long tons	150-180 t.p.h.
	Taikee No. 2	120 long tons	150-180 t.p.h.
	Taikee No. 3	320 long tons	150-180 t.p.h.
	Taikee No. 5	250 long tons	150-180 t.p.h.
	Taikee No. 6	320 long tons	150-180 t.p.h.
	Taikee No. 7	130 long tons	150-180 t.p.h.
Union Waterboat Co. Ltd.	Tai Yat No. 1	270 tons	150 t.p.h.
	Tai Yee No. 2	290 tons	150 t.p.h.
	Tai Sam No. 3	300 tons	150 t.p.h.
	New No. 4	340 tons	170 t.p.h.
	Tai Ng No. 5	295 tons	150 t.p.h.
	Pier services to ocean terminal		1,500 tons/day

Table D. PORT OILERS.

Company	*Vessel*	*Grade of oil*	*Capacity-product long tons*	*Delivery rate per hour in water tons*
Shell Co. (H.K.) Ltd.	M.V. Fung Wong Shan	Boiler fuel or Marine diesel	280	270
	M.V. Lung Shan	White oil	350	270
	Fu Yung Shan	Boiler fuel or Marine diesel	750	450
	Shih Tou Shan	Boiler fuel or Marine diesel or White oil	750	450
	Shell Wor Fung	White oil	260	80
	Shell Shun Fung	Boiler fuel or Marine diesel	1,500	900
Caltex Oil Hong Kong Ltd.	Caltex 54	Boiler fuel or Marine diesel	400	120
	Caltex Tsuen Wan HK. 2	Boiler fuel or Marine diesel	800	280
	Caltex 111	Gas oil	40	60
	Caltex 133	Gas oil	250	100
Mobil Oil Hong Kong Ltd.	M.V. Mobil Meishan	Boiler fuel or Marine diesel	900	250
	M.V. Mobil Mei Ping	Light oil	150	50
	M.V. Mobil Mei An	Light oil	150	50
H.K. Oil Co.	Barge 101	Boiler fuel	750	350
	Barge 102	Marine diesel/Boiler fuel	500	150
	Barge 103	Gas oil	1,000	150
Esso Standard Oil (H.K.) Ltd.	M.V. Esso Tsuen Wan II	White oil	270	46
	M.V. Esso Tsing Yi	Boiler fuel or Marine diesel	1,600	500
	M.V. Esso Hok Un	Boiler fuel or Marine diesel	1,600	500

STEVEDORES: The following table shows the average handling rates per gang hour:

Cargo	*Place*	*Loads tons per gang hour*	*Discharge tons per gang hour*
General	Wharf	12	15
General	Stream	10	12
Bale or bag	Wharf	20	25
Bale or bag	Stream	15	20

Stevedores work 24 hours per day except Mid-Autumn Festival and Chinese New Year Holidays.

DENSITY: 1017.

FRESH WATER: Available but the supply is sometimes limited, depending on the storage levels in Hong Kong's reservoirs. The supply to ships is made at commercial wharves and from water boats. See Table C.

FUEL: Excellent facilities exist for bunkering vessels with fuel oil and coal. Fuel oil can be obtained either at the wharves adjacent to the oil installation, or from harbour oilers owned and operated by the oil companies. Fuel oil from these vessels can be pumped on board without impeding cargo operations. Adequate stocks of good quality bunker coal suitable for coal-fired marine boilers are maintained in the port. Fuel oil available with viscosity up to 1,000 sec. Redwood. 24 hours notice for supply is required. Also gas oil and marine diesel available. See Table D.

FIRE PRECAUTIONS: The Fire Services Department operates six fire boats, the largest being the 350 ton "Alexander Grantham". It has an output capacity of 45,000 litres of water and 32,850 litres of foam a minute through a battery of monitors. This vessel is equipped to deal with any type of fire on any size vessel, and is designed to operate both in port and at sea.

GANGWAY/DECK WATCHMEN: Not compulsory but recommended.

OPENING/CLOSING HATCHES: Usually performed by ship's crew.

CERTIFICATES: Following certificates to be presented to the Marine Office before clearance could be granted:

Ship's Register and/or Tonnage Certificate.
Load Line Certificate.
Radio Certificate.
Safety Construction Certificate.
Safety Equipment Certificate.
Derating Certificate or Derat Exempt Certificate.
Last Port Clearance.

CARGO GEAR: Normal routine gear, wire and rope slings, nets, grabs, boardtrays and floating cranes up to 100 tons available. Vessel's cargo gear must be used for working cargo at all alongside berths.

IDENTIFICATION CARDS: No identification card is required for crew or passengers going ashore. When the vessel has exceeded a stay of 14 days in port, all crew members must deliver to the Harbour Control Office, Immigration Department through the agents a signed copy of the "Immigration Arrival Card."

CONSULS: The following countries maintain consular offices in Hong Kong:

Argentina
Australia
Austria
Belgium
Brazil
Burma
Canada
Colombia
Costa Rica
Cuba
Denmark
Dominican Republic
Ecuador
Egypt
El Salvador
Finland
France
Germany
Great Britain
Greece
Guatemala
Honduras
India
Indonesia
Iran
Irish Republic
Israel
Italy
Japan
Jordan
Khmer Republic
Korea
Lebanon
Mexico
Nauru
Netherlands
New Zealand
Nicaragua
Nigeria
Norway
Pakistan
Panama
Peru
Phillipines
Portugal
Singapore
South Africa
Spain
Sweden
Switzerland
Thailand
U.S.A.
Uruguay
Venezuela
Vietnam

REPAIRS: In addition to ship and engine maintenance and repair work, the dockyards have facilities for many miscellaneous services such as are provided by modern dockyards. These include physical tests on materials such as anchors and cables, for which test certificates can be supplied, chemical analysis, drawing office requirements, chemical cleaning of engines and boilers, shot and sand blasting, zinc spraying to name but a few.

DRY DOCKS:

Hong Kong United Dockyards Ltd. (Taikoo Yard): Drydock at Quarry Bay, length 787 ft., width 87 ft. Floating dock, length over platforms 572 ft., width 78 ft., net lifting capacity 11,500 tonnes (Termination of operations at Taikoo are scheduled for the end of 1978, after which floating drydock and yard facilities will be transferred to Tsing Yi.)

Hong Kong United Dockyards Ltd. (Kowloon Yard): 3 drydocks of which the largest has a length of 700 ft., width of 87 ft.

Hong Kong United Dockyards Ltd. (New yard at Tsing Yi): Floating dock, length over platforms 788 ft., width 108 ft., net lifting capacity 20,000 tonnes.

Island Navigation Corporation: S.W. Tsing Yi Island. Floating dock present maximum capacity 30,000 tonnes.

REPATRIATION: All formalities connected with engagement and discharge on board British ships, and on foreign ships whose flag is not represented by a consular officer resident in Hong Kong, are required by law to be conducted at the Crew Division Office. Hong Kong continues to be one of the main recruitment centres of Asian seamen and a Seamen's Registry Office, which is an adjunct to the Seaman's Recruiting Office, under the same division, maintains records of all Hong Kong seamen. The Seamen's Recruiting Office controls the recruitment, selection and supply of Chinese seamen to ships requiring them, and is situated at the Rumsey Street Reclamation, adjacent to the Headquarters.

Seamen's Travel Documents. The Hong Kong Government Seaman's Service Record Book (Seaman's Discharge Book) is issued by the Marine Department and is a record of employment. The Hong Kong Government Seaman's Identity Book is issued by the Immigration Department and enables the holder to return to Hong Kong without a visa during the validity of the book (initially 3 years, with 3-year renewals), and also within 12 months after the expiry of the validity of the book.

A Seaman's Certificate of Nationality and Identity is issued at the Immigration Department only to seamen of British nationality, whereas the Seaman's Discharge Book and the Seaman's Identity Book may also be issued to alien seamen. It is the equivalent of a British passport and no visa is required for return to Hong Kong.

All Crew members signing-off for repatriation must first obtain permission from the Director of Immigration. All crew arriving to join vessel must produce a guarantee letter through the Agents responsible for all maintenances and other eventual expenses.

AIRPORT: Regular International flights. Airstrip capable of any size of jet planes. Transportation from port to airport terminal about 40 minutes bus drive.

TELEPHONES: Are available at all alongside berths for connection on board ship.

TIME: Standard time kept in the colony is 8 hours in advance of GMT. Summer Time, which is 1 hour in advance of Standard Time, is kept from 0330 hrs. on the first Sunday after 15th April to 0330 hrs. on the first Sunday after 15th October, each year.

HOLIDAYS: Public holidays in Hong Kong occur mainly on festivals whose date is governed by the lunar calendar.

Every Sunday; First week-day in January; Chinese New Year's Day; Second day of Chinese New Year; Third day of Chinese New Year; General holiday in lieu of that for the Ching Ming Festival; Good Friday; Day following Good Friday (Ching Ming Festival); Easter Monday; Birthday of Her Majesty the Queen; Tuen Ng Festival; First week-day in July; First Monday in August; Last Monday in August, which shall be Liberation Day; Day following Chinese Mid-Autumn Festival Day; Day following Chung Yeung Festival: Christmas Day; First week-day after Christmas Day.

POLICE/AMBULANCE/FIRE: When the services of the fire brigade, immigration, port health or police are required, appropriate signals should be made in accordance with the list of "Hong Kong Port Signals". The Marine Division of the Police is responsible for internal port security. Its fleet of launches maintain constant patrols in Hong Kong's territorial waters.

GENERAL: No waste to be disposed into harbour. A free refuse disposal service is available for domestic refuse. Ships agents can arrange this through Marine Department. Chain required for mooring to buoy. Unnecessary use of ship's sirens prohibited.

SERVICES: Services available including tank cleaning, painting, washing, compass adjusting, calibration of direction finder, radar repairs, 24 hours service laundry, supply of stores and provisions, motor-boats service between ship and shore.

SHORE LEAVE: Crew members are usually allowed ashore.

CLASSIFICATION SOCIETIES: The following Classification Societies with British technical committees are represented by their own exclusive officers in Hong Kong: Lloyds Register of Shipping, 1908-09, Hutchinson House, 10, Harcourt Road, Hong Kong; The American Bureau of Shipping, 1203-4 Wah Kwong Building, 48-66 Hennessy Road, 12/F., Wanchai, Hong Kong; Bureau Veritas, 2107 International Building, Des Voeux Road, Central, Hong Kong; Det Norske Veritas, 3407, Gammon House, 12, Harcourt Road, Hong Kong; Germanischer Lloyds, c/o Carmichael & Clarke Ltd., 828-831, Swire House, Hong Kong.

WEATHER: 1st May to 31st October usually considered as typhoon season. No operation of cargo when typhoon signal No. 3 or upward is hoisted. Also see "Radio".

DEVELOPMENT: The central fairway has been dredged to – 36 ft. Reclamation continues in various areas within the harbour. Additional 'Public Cargo Working Areas' are near completion and others planned.

AUTHORITY: Director of Marine.

AGENT: Shipping & Transport Services Ltd., Room 704 Hang Chong Bldg., 5 Queen's Rd. Central HK, Hong Kong. Telephone: 249069-74. Cables: Mainstay HX. Telex: 83173 Mstay HX.

NOTES

Please also advise Shipping Guides Ltd.

Iceland

ISAFJORD: 66.05 N. 23.06 W.

DOCUMENTS: As for "Reykjavik".
PILOTAGE: TFZ Isafjord Radio 2182 kc/s. To call Pilot use morse lamps or whistle "G".
ANCHORAGE: In Fjord, depth of 6 fathoms.
MAX. SIZE: Dry cargo vessels up to 4,000 g.r.t. Tankers up to 30 ft. draft.
HEALTH: Inform Agent.
RADIO: TFZ 2182 kc/s.
TUGS: Not required.
MEDICAL: Inform Agent 1 hour in advance. Hospital available.
FRESH WATER: Always available through hose-pipes.
FUEL: All grades available advance notice required is 2 hours.
GANGWAY/DECK WATCHMEN: Necessary. Carried out by crew.
OPENING/CLOSING HATCHES: Performed by crew.
CERTIFICATES: All relevant certificates required.
CUSTOMS ALLOWANCE: Tobacco: 200 cigarettes each crew member, 600 for Master; Wine/Spirits: 2 bottles for each crew member, 6 bottles for Master.
IDENTIFICATION CARDS: Not required.
CONSULS: British, German, Norwegian, Swedish, Danish.
REPAIRS: All types of repairs possible.
DRY DOCKS: 1 small dry dock available.
REPATRIATION: No facilities exist.
AIRPORT: Distance from port 2 miles, regular flights.
TIME: GMT. No change.
HOLIDAYS: Work carried out every day.
POLICE/AMBULANCE/FIRE: Police, Ambulance, Fire, tel. 3258.
TELEPHONES: None available.
SERVICES: Compass adjusting, radar, echomaster, specialists.
SHORE LEAVE: Allowed.
AUTHORITY: Captain of the Port.

KEFLAVIK-NJAROVIK: 64.00 N. 22.33 W.

DOCUMENTS: As for "Reykjavik".
PILOTAGE: Pilotage is compulsory for vessels over 100 tons net. Pilot is available for all vessels 24 hours per day and is reached via Reykjavik Radio. Pilot boards vessel 1 mile outside Vatnsnes.
ANCHORAGE: Outside the harbour in depths of 27 m. with good holding ground.
TUGS: Use of tug is not necessary.
BERTHING: Port has concrete pier which will be extended for a length of 110 m., and a wooden quay 45 m. in length. Depth of water in harbour and alongside wharves is 20 to 45 ft. Entrance is easy for access.
STEVEDORES: Working hours: 8 hours per day 0800 to 1700 hrs.
FRESH WATER: Available through hose connection on the quay.
FUEL: Available.
REPAIRS: 2 shipyards available.
AIRPORT: Keflavik International Airport is only 4 km. away.
TIME: GMT. No change.
POLICE/AMBULANCE/FIRE: All Tel. 2222.
TELEPHONES: None available on board.
SHORE LEAVE: Allowed.
AUTHORITY: Harbour Master.

NESKAUPSTADUR, Nordfjordur: 65.09 N. 13.41 W.

DOCUMENTS:
Crew List.
Passenger List.
Customs Documents.
Provision List.
Manifests and Ship's Papers.
PILOTAGE: No Pilots. Road clear, keep in middle of fjord.
ANCHORAGES: Depending wind. With North or N.W. winds anchor towards South coast and well in the fjord. When N.E. off town towards North coast, but keep clear of small boat moorings.
MAX. SIZE: Length/breadth no restriction. Main quay is 70 m. long and it is built right out to the steep bank at the coast. Depth close to jetty 7 m. but increases quickly.
HEALTH: Free pratique automatic from Customs Officer. Radio for doctor if illness on board.
RADIO: Neskaupstadur Radio 2182 kc/s. (TFM) 24 hour watch. VHF, Channels 16 and 26. Range approximately 40 miles.
TUGS: No tugs but large motor-boats are normally obtainable if necessary.
BERTHING: No specific requirements unless over 7 m. draft, when fendering required.
STEVEDORES: If possible 24 hours ETA. Preferably before 1600 hrs. for commencing next morning. Load or discharge rates according to goods.
MEDICAL: Always send advance notice of required medical attention. Hospital available, also 3 doctors and dentist.
TANKERS: Diameters of lines 4 in. and 6 in. Oil companies BP and Shell have their own small quays. The third company Esso uses BP jetty.
DENSITY: Normal.
FRESH WATER: Shore line on jetty. No barge.
FUEL: Diesel oil only.
DEVELOPMENTS: No expected draft increases. New berths are under construction but will take unforeseen time.
GANGWAY/DECK WATCHMEN: Available but not compulsory.
OPENING/CLOSING HATCHES: Normally carried out by crew.
CERTIFICATES: Ship's Register.
CUSTOMS ALLOWANCE: 200 cigarettes a week while in Iceland. Only 1 allowance of spirit, i.e. on arrival 1 to 3 bottles according to occupation.
IDENTIFICATION CARDS: Not required.
CONSULS: Denmark tel. 199 or 330. France tel. 14 and 19.
REPAIRS: Limited repairs to engines, hull and deck. Good repairs to radars, sounders, tiller pilots, etc.
DRY DOCKS: None. 1 slipway, 450 tons.
REPATRIATION: Winter flights twice a week or more. Summer every day.
AIRPORT: Distance 3 km.
TIME: GMT, no alterations.
HOLIDAYS: Last Thursday April; 17th June; 1st May; 25th and 26th Dec.; New Year, etc. If work is carried out 31st Dec., 24th Dec., Saturday before Easter and Whitsun double pay is claimed.
POLICE/AMBULANCE/FIRE: Telephone office at shore end jetty.
TELEPHONES: No arrangement to place telephones on board.
SERVICES: No tank-cleaning equipment. No discharge of tank-washings. Compass adjusting available.
SHORE LEAVE: Allowed.
DELAYS: None except if berth not available.

PATREKSFJORDUR: 65.35 N. 23.59 W.

DOCUMENTS: 8 Crew Lists, Passenger Lists, Custom Documents, Health Documents, Manifests, Bills of Lading, Ship's Papers.
PILOTAGE: Pilotage not compulsory, but if needed then contact Radio Patreksfjordur on 2182 M.F.
ANCHORAGE: Anchorage is sheltered by the peninsula.
MAX. SIZE: See "Berthing".
RADIO: Radio Patreksfjordur on 2182 M.F.
TUGS: Available.
BERTHING: The entrance has a depth of 4.7 m. to 4.9 m. (15.5 to 16 ft.) at LLWST. The harbour has a depth of 6.4 m. (21 ft.) at LW, and 10 m. (33 ft.) at HW. 320 m. of quayage with depths from 5.5 m. to 5.8 m. (18 to 19 ft.) alongside. The harbour can be entered by day and night.
STEVEDORES: Working hours 0800 to 1900 hrs.
MEDICAL: Hospital available, contact through radio.
FRESH WATER: Available. No notice required.
FUEL: Available. No advance notice required.
REPAIRS: Machine-shop. General repairs can be effected. Diver obtainable.
AIRPORT: About 26 km. distance from harbour. Regular service, by airlines.
TIME: GMT. No change.
SHORE LEAVE: Allowed.
AUTHORITY: Patrekshofn, Patreksfiroi.

REYKJAVIK: 64.09 N. 21.50 W. (See Plan Book)

DOCUMENTS:
For the Immigration Office
1 Crew List.
1 Passenger List.
For Customs Authority
Master's Report on vessel's arrival from abroad.
Master's Certificate with Manifests of all goods.
Master's Certificate with Manifests of goods to each port of discharge.
Health Declaration.
List of Provisions and other Stores in ship.
Ordinary procedure at least 5 copies of each manifest (3 for customs).
PILOTAGE: Pilotage compulsory. Telegraphic address: Harbour Master, Harbour Office, Reykjavik. Desirable advance notice of ETA 24 hours and again notice 3 hours before expected time of arrival. VHF working Channel 12 at Pilot station and pilot boats. All day round watch.

Pilot boat: Grey hull with red and white deckhouse. International signals used if necessary. Pilot boat leaves harbour on request and meets vessel up to 1 naut. mile off Grotta (East of buoy 6): Most frequent boarding place is buoy 7 Kollafjordur.
ANCHORAGE: Good anchorage at Kollafjordur in 30 to 35 m. water 1.5 miles North of Engey lighthouse. Anchorage prohibited in neighbourhood of harbour entrance.
RESTRICTIONS: All day service. Draft in old harbour restricted at MLWST to 18 ft. In Sundahofn to 26 ft. No other restriction.
MAX. SIZE: Longest straight quay 244 m. (800 ft.). Breadth unrestricted. Depth 26 ft. at MLWST (29 ft. at MLWNT). At present 3 installations for oil carriers to discharge through submerged pipelines. Moorings for about 20,000 d.w.t. ships and draft restriction to 21 ft. in the approach to one of these installations.
HEALTH: Pratique obtained through customs authorities. In case of suspected disease notify port office or Agent in advance.
RADIO: Reykjavik Radio TFA.

RADAR/VHF: No harbour radar. Pilot office can be contacted by VHF Channel 16. Working Channels 12 and 14.

TUGS: Tugs meet vessels on roadstead. Ship's lines used.

BERTHING: Bigger vessels preferably handled at high water.

STEVEDORES: Stevedoring must be arranged in advance preferably by Agent.

MEDICAL: Medical attention available without notice. For hospital stay or surgical operation advance notice desirable, either through Agent or port office.

TANKERS: Pipe-lines diameter for discharging is 8 in.

DENSITY: Salinity varies from 33.6% to 35.0% giving sea water density about 1027 in average.

FRESH WATER: Water delivered from taps at quay at rate of 20–30 t.p.h, on the roadstead delivered by tug with 50 cu. m. water-tank.

FUEL: Grade of fuel oil 200–400 per second. Supplied by oil-pipe or by barge. If supplied by barge then 1 day's notice required.

FIRE PRECAUTIONS: Ordinary precautions for handling of dangerous goods applied.

DEVELOPMENTS: In a new harbour area – Sundahofn – quay construction, dredging and reclamation just finished. Length of quay 480 m. and 70 acres storage area under development. Discussion is taking place on new oil landing facilities to accommodate up to 70,000 t. tankers.

GANGWAY/DECK WATCHMEN: Ship's gangway to be used. Watchmen services from ashore not necessary but can be arranged if asked for.

OPENING/CLOSING HATCHES: Carried out by stevedores.

CERTIFICATES:

1. Certificate of Nationality.
2. International Tonnage Certificate.
3. Certificate of Seaworthiness.
4. Cargo Ship Safety Construction Certificate.
5. Cargo Ship Safety Equipment Certificate.
6. Cargo Ship Safety Radiotelegraphy Certificate or Cargo Ship Safety Radiotelephony Certificate.
7. International Load Line Certificate.

Passenger ships must have certificates No. 1, 2, 3, 7 and in addition Passenger Ship Safety Certificate.

CUSTOMS ALLOWANCES: 200 cigarettes or equivalent. 0.75 litre beverage, 24 bottles beer.

IDENTIFICATION CARDS: Identification card must be carried.

CONSULS:

U.S.A.	Embassy	Tel.	24083
Belgium	Consul General	,,	20000
Brazil	Consul	,,	11500
Chile	Consul	,,	23597
Denmark	Embassy	,,	13747
Finland	Consul General	,,	24280
France	Embassy	,,	17621
Greece	Consul	,,	19621
Holland	Consul General	,,	12085
Israel	Consul General	,,	11043
Italy	Consul General	,,	11055
Japan	Consul	,,	17700
Canada	Consul General	,,	38100
Mexico	Consul	,,	18995
Norway	Embassy	,,	13065
Poland	Commercial Attache	,,	18759
Portugal	Consul	,,	11610
U.S.S.R.	Embassy	,,	15156
Spain	Vice-Consul	,,	13057
Great Britain	Embassy	,,	15884
Switzerland	Consul	,,	24209
Sweden	Embassy	,,	13216
Czechoslovakia	Commercial Attache	,,	19823
Turkey	Consul General	,,	16666
W. Germany	Embassy	,,	19535
Uruguay	Consul	,,	12720

REPAIRS: All kinds of ship repair possible.

DRY DOCKS: Only slipways available up to 2,000 metric tons weight. Dimensions: Length 85 m., breadth 13.6 m.

REPATRIATION: Can be arranged.

AIRPORTS: Reykjavik Airport within 10 minutes drive. Mostly for local routes. Keflavik Airport 50 km. distance, served regularly by airlines both to Europe and America.

TIME: Icelandic summertime used all year round and is same as GMT.

HOLIDAYS: January 1 (New Year's Day); Maundy Thursday; Good Friday; Easter Monday; May 1; Ascension Day; Whit Monday; June 17 (National Day); First Monday in August (Bank Holiday); Christmas Day and Second Christmas Day. On Christmas Eve and New Year's Eve work stops at noon. Dock work goes on on Bank Holiday and by Labour Union permission work may be carried out on Saturday against overtime payment and exceptionally at night until 2200 hrs.

POLICE/AMBULANCE/FIRE: Police 11166, Ambulance 11100; Fire 11100.

TELEPHONES: Telephone connection can be arranged at some berths in the old harbour and in Sundahofn telephone connections will be at the quay.

GENERAL: Engines may not be run while ship is berthed.

SERVICES: Compass adjusting carried out by private firm as well as tank cleaning.

SHORE LEAVE: Crew members are allowed ashore.

DELAYS: Normally no delay is to be expected beyond that caused by normal customs clearance.

AUTHORITY: Reykjavik Port Authority.

SIGLUFJORD: 66.10 N. 18.50 W.

DOCUMENTS: As for "Reykjavik".

PILOTAGE: Compulsory. Pilot meets vessel about 200 m. from harbour entrance.

ANCHORAGE: East of harbour in depths according to draft 25 m. to 30 m. good holding ground. Gales from North set heavy sea, vessels then seek anchorage in small bay S.W. of Siglunes.

RADIO: Siglufjordur Radio TFX.

TUGS: None available.

BERTHING: There are several piers and wharves inside the North Mole, 3 quays used by larger vessels have depths up to 23 ft. at LW.

Quays: Hafnagardur, on the South side of North Mole, has a length of about 125 m., with a depth of 6.5 m. (21.3 ft.) alongside. Londunarbryggja has a length of 100 m., with a depth of 7 m. (23 ft.) alongside. Baejarbryggjan (Town Quay) has a length of about 100 m. with a depth of 6 m. (19.7 ft.) alongside.

STEVEDORES: Available. Working hours 0700 to 1200 hrs. and 1300 to 1700 hrs; overtime can be arranged.

MEDICAL: All facilities available.

FRESH WATER: Available.

FUEL: Available in general grades only.

GANGWAY/DECK WATCHMEN: Necessary.

OPENING/CLOSING HATCHES: Stevedores normally perform this work.

CARGO GEAR: Ship's gear (no cranes).

IDENTIFICATION CARDS: Not required.

CONSULS:

Denmark Tel. 71232 Norway Tel. 71160 Sweden Tel. 71421

REPAIRS: For moderate size vessels can be obtained. Diver available.

TIME: GMT. No change.

POLICE/AMBULANCE/FIRE: All tel. 71170.

SHORE LEAVE: Allowed.

AUTHORITY: Captain of the Port.

SKAGASTROND: 65.50 N. 20.20 W.

DOCUMENTS: As for "Reykjavik".

PILOTAGE: Pilots are available. When approaching port, order Pilot through Agent if required.

MAX. SIZE: Draft max. 19 ft.

MEDICAL: Doctor available but located in Blonduos 20 km. away, doctor visits Skagastrond 3 days a week.

FRESH WATER: Available.

FUEL: Available.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

REPAIRS: Small repairs available.

AIRPORT: Nearest 20 km. away in Blonduos.

TIME: GMT. No change.

POLICE/AMBULANCE/FIRE: Police Station and Firemen in the port.

TELEPHONES: Available.

SHORE LEAVE: Allowed.

AUTHORITY: Captain of the Port.

VESTMANNAEYJAR: 63.30 N. 20.14 W.

(See Plan Book)

DOCUMENTS:

Health Certificate.
Crew List.
Passenger List.
Manifest.
Ship's Register.

PILOTAGE: Pilotage compulsory, day and night service. Ship to advise over Vestmannaeyjar Radio ETA. Pilot always available but 1 hour's advance ETA is required.

ANCHORAGE: There are anchorages with depths from 24 m. to 34 m., good holding ground about 0.5 miles North of harbour and on North side of peninsula in depths of 28 m. to 34 m.; this anchorage is exposed to winds between West and North.

RESTRICTIONS: No restrictions except for largest vessels. They must enter at high tide.

MAX. SIZE: 5,000 g.r.t.

RADIO: Vestmannaeyjar Radio. VHF available.

TUGS: Normally join in-coming vessels at anchorage. The use of tug is optional. 1 Tug, 500 hp.

STEVEDORES: Available. Ordered by Agent. Working hours: 0800-1700 hrs., Monday–Friday.

CRANES: 2 mobile cranes, capacity up to 15 tons.

MEDICAL: Not necessary to receive advance notice. Hospital facilities and doctors available.

TANKERS: Discharge lines, 7 in. No deballasting facilities available.

FRESH WATER: Shore installations on every berth.

FUEL: All grades available.

GANGWAY/DECK WATCHMEN: Available.

OPENING/CLOSING HATCHES: Stevedores.

CUSTOMS ALLOWANCES: For each crew member; 100 cigarettes or 20 cigars or 100 grm. tobacco, and 1 bottle spirits.

IDENTIFICATION CARDS: Not required.

CONSULS: Denmark, Germany, Great Britain, Norway, Sweden. To be called through Vestmannaeyjar Radio.
REPAIRS: All repairs possible.
AIRPORT: Local airport. Daily connection to Reykjavik.
TIME: Local time GMT.
HOLIDAYS: New Year's Day; Good Friday; Easter Monday; Labour Day (1 May); Ascension Day; Whit Monday; National Festival Day (17 June); Prayer Day; Christmas Day (25 December). No work on New Year's Day, Good Friday, Easter Sunday, Whit Sunday, 17 June, Christmas Day.
POLICE/AMBULANCE/FIRE: All tel. 1666.
SERVICES: Radio, radar services etc. Divers available.
SHORE LEAVE: Allowed.
DEVELOPMENTS: Depth of entrance to harbour to be increased to 6.5 m. New Quays on North Side of harbour to be built in the near future.
AUTHORITY: Harbour Master.

NOTES

Please also advise Shipping Guides Ltd.

COURTESY FLAG: Correct flag to be flown by foreign ships visiting Indian ports is Indian Merchant Navy Ensign (a red flag with a length of one and one half times the width and with National Flag of India superimposed in top quarter next to staff) and not Indian National flag.

SHIP'S OFFICER'S REPORT: Apart from the various forms and Crew Lists, etc., the Customs Boarding Officer also requires a List of Private Property in the possession of the Master, officers and crew on Form No. IV in duplicate and the local Agents need 2 more copies of the same for clearing the vessel inward. This procedure is followed when a vessel arrives from abroad or even when she is arriving from an Indian Port. It is common in both the cases.

ALLEPPEY: 09.29 N. 76.23 E.

PORT LIMITS: On the North by a line drawn from the North boundary pillar (white masonry structure) to 7 fathoms of water. On the South by a line drawn from the South boundary pillar, S. W. to 5 fathoms of water and thereon West to 7 fathoms of water. On the West by a line running North to South joining the Northern and Southern boundary lines. On the East by the beach road from the North boundary pillar to a stone on the beach road 220 ft. East of South boundary pillar.

DOCUMENTS:

(*a*) For Port Office:

Last port clearance (original for verification and return). Ships' Registry (original for verification and return). Load Line Certificate (for perusal and return). Safety Radio Telegraphy Certificate (for perusal and return). Safety Equipment Certificate (for perusal and return). Passenger List (1). Crew List (1). Deck Cargo Certificate (1).

(*b*) For Customs:

Application for entry inwards. Last Port clearance. Port Office Entry Certificate. Arrival report. Particulars required by customs in approved form. Favour Parcel Certificate. Gift Parcel Certificate. Health Report. Opium Certificate. Arms and Ammunition Certificate. Import manifest. Passengers list. Storelist, crew list, and private property declaration. Ship's currency declaration. ILH receipt.

PILOTAGE: None. Open roadstead port.

ANCHORAGES: Approach to port free from navigational dangers. Anchorage provides good holding ground.

MAX. SIZE: Being open roadstead, vessels of any size can anchor according to draft.

HEALTH: Port Health Officer may be contacted by telegram addressed CYCLONE ALLEPPEY for issue of pratique certificate. Procedure to be followed in Indian Port Health Rules.

RADIO: Morse system of signalling by light and signalling by International Code flags alone are available. Steamers code can be used as call sign.

TUGS: 2 tugs owned by Port Department render services per requisitions from Agents. Tugs usually approach vessels after anchoring.

BERTHING: No Berths.

MEDICAL: Government hospitals available.

DENSITY: 1025.

FRESH WATER: Only available in very small quantities.

FUEL: None available.

GANGWAY/DECK WATCHMEN: Available.

OPENING/CLOSING HATCHES: By stevedores.

IDENTIFICATION CARDS: Necessary only when crew land ashore.

CONSULS: Nil.

REPAIRS/DRY DOCKS: None.

REPATRIATION: Crew changes are effected subject undertaking by Owners through Agents.

AIRPORT: Cochin, 62 km. North of Alleppey.

TIME: GMT plus 5.5 hours.

HOLIDAYS: For work on approved closed port holidays and national holidays labourers have to be paid extra in addition to wages.

POLICE/AMBULANCE/FIRE: Emergency (Fire and Police) 100 Alleppey Exchange.

SHORE LEAVE: Crew allowed to land. Foreigners required obtain prior permission of Police authority through Agents.

AUTHORITY: Senior Port Conservator.

BEDI BUNDER: 22.31 N. 70.02 E.

DOCUMENTS:

1 Maritime Declaration of Health.
1 Last Port Clearance.
6 Crew Lists.
6 Passengers' Lists.
4 Stores Lists.
4 Private Property List of crew and officers.
4 Certificates of Currency, Arms and Ammunition and Deck Cargo.
1 Same Bottom cargo list.
1 Hazardous Cargo List with categories.

PILOTAGE: Vessels anchor at roads as pilotage not compulsory; however, if requested in advance by Master to PORTAL BEDI, ship may be piloted from Pirotan Lighthouse to Rozi Anchorage about 7 miles from port by local Pilot Guide. Pilot boards vessel off Pirotan Island Light (Lat. 22° 36′ N. Long. 69° 57′ E.).

ANCHORAGE: Lighterage port. Steamers anchor at Rozi anchorage about 7 miles from port, where good anchorage up to 7 fathoms at low water.

HEALTH: Pratique granted on delivering Maritime Declaration of Health to Customs officer on boarding. Vessels having touched yellow fever area prior to arrival granted free pratique by Mosquito Party to be deputed from Kandla, which can only be arranged by prior notice failing which vessel has to proceed either Kandla or Bombay for Free Pratique.

RADIO: Call sign VUK5. Working hours:

0930–1130 hrs. 1730–1930 hrs.
1330–1530 hrs. 2130–2330 hrs.

Frequency 600 m. or 500 kc/s., working at 429 m. and calling at 500 m.

TUGS: Port tug available for use at anchorage.

BERTHING: No berths.

STEVEDORES: Agents and stevedores require advance ETA of 24 hours for preparing labour gangs. Daily loading is 400/500 tons for bagged cargo.

MEDICAL: 24 hours notice required for medical service. Government hospital at Jamnagar where vaccination/fever injection services available.

DENSITY: 1025.

FRESH WATER: Supplies by barge capacity 50 tons. Possible supply about 50 tons every alternate tide subject adequate supply of water in port area.

FUEL: None.

GANGWAY/DECK WATCHMEN: The services of watchmen are recommended.

OPENING/CLOSING HATCHES: By ship's crew.

CERTIFICATES:

Ship's Register.
Load Line Certificate.
Safety Radio Certificate.
Safety Equipment Certificate.
Derat. Exemption Certificate.
Gear Certificate.

CONSULS: None.

REPAIRS: No facilities for repairs to ships.

DRY DOCKS: None.

AIRPORT: Jamnagar – 7 miles from city. Daily flight Jamnagar-Bombay.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Non-working days and work not permitted even on payment of overtime charges: Indian Republic Day; Bakri-Id; Holi; Muharram; Gokulastami; Dasehra; Diwali; Ramzan-Id.

POLICE/AMBULANCE/FIRE: District Superintendent of Police 100 and 3795; Ambulance/Casualty Department 4444; Fire 101.

GENERAL: Tidal port and barges loaded and sent out to ship during tide time only. Loading of barges carried out manually.

SHORE LEAVE: Crew members allowed ashore in emergency or for medical treatment. Necessary police permits take 48 hours.

REGULATIONS: No launch services available for crew. Only 5 ships allowed to work at time at anchorage. Further arrivals wait turn.

DELAYS: Delay expected for loading and discharging in monsoon due to limited number of barges available.

DEVELOPMENTS: The scheme of creating additional facilities, road connection, transit godowns, electrification and water supply and cranes, etc. near mouth of creek. This newly developed area is completed and connected by good all weather road with city of Jamnagar.

AUTHORITY: Port Officer.

BELEKERI: 14.43 N. 74.15 E. (See Plan Book)

PORT LIMITS: *North.* A line drawn due West from Kawada Guda peak into the sea up to 7 fathoms of water starting from a point 50 yards above high-water mark of the shore.

East. Seashore of Belekeri Bay 50 yards above high-water mark from North Boundary Mark to rocky promontory in Lat. 14° 40′ N. including the Belekeri creek and all branches thereof, as far as navigable and the shores and banks within 50 yards of high-water mark Spring tides including Islands. All patta lands and other private sites excluded.

South. A line drawn due West from a point 50 yards above high-water mark of rocky promontory in Lat. 14° 40′ N. into the sea up to 7 fathoms of water.

West. A line joining the two 7 fathoms points in the sea.

DOCUMENTS:

8 Crew Lists.
2 Manifests of Stores.
2 Private Property Declarations.
2 Currency Lists.
1 Maritime Declaration of Health.
3 Passenger Lists.
4 Import Manifests.
Last Port Clearance.

PILOTAGE: Not necessary. Vessels anchor in stream and in open sea. Ships can be manoeuvred under guidance of Port Officer.

ANCHORAGE: The anchorage for shallow draft steamers in open roadstead is with Kukra Island bearing 080° (T) distance about 1.5 miles in depth of 27 to 29 ft. Anchorage for deep drafted vessels is with Kukra Island bearing 080° (T) distance about 2.5 miles in depth 34 to 37 ft.

HEALTH: Medical Officer, Ankola acts as Port Health Officer. Free pratique to incoming vessels granted by radio. All vessels calling from foreign destination must send radio message addressed "Medical Officer, Ankola", at least 48 hours before entering, giving last port of call, number of crew, health conditions, ETA and requesting pratique; same message must be repeated to Agents also, on which pratique granted on shore. Anchoring time is pratique time. For vessels from Indian ports pratique not required. Vessels which have taken on board passengers or crew from yellow fever areas within 30 days of departure from such ports will be under quarantine. Free pratique will not be granted until Mosquito Search Party, from nearest major port (i.e. Cochin, Goa or Bombay) has inspected, disinfected and certified that ship fit for granting pratique. Master to inform Agent well in advance if arriving from yellow fever area to enable arrange Mosquito Search Party for quick pratique.

RADIO: Recommended to give ETA or pratique messages via Goa or Bombay Radio.

BERTHING: No berths.

STEVEDORES: ETA required at least 48 hours prior arrival order Agents advise Shippers and stevedores.

MEDICAL: No hospital but good medical aid given at Karwar, 20 miles distant. In case of inoculations and vaccination at least 2 days advance notice to be given for vaccines to be brought from Hubli or Belgaum distance 100 and 150 miles respectively.

DENSITY: 1025.

FRESH WATER: Can be supplied from Karwar by water barge.

FUEL: None.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Generally done by ship's crew.

CERTIFICATES:
Ship's Register.
Load Line Certificate.
Safety Radio Certificate.
Safety Equipment Certificate.
Derating Certificate.
Vaccination and Inoculation Certificates.

CUSTOMS ALLOWANCES: 200 cigarettes allowed per crew member. Wine and/or Spirit: 1 bottle of light spirit and 1 bottle of hard spirit per crew member.

CARGO GEAR: Valid International cargo gear certificate not more than 12 months old. Validity shall cover whole period of loading and discharging.

IDENTIFICATION CARDS: Not required.

CONSULS/REPAIRS/DRY DOCKS: None.

REPATRIATION: Arranged from Goa or Bombay.

AIRPORT: Nearest airports Goa or Belgaumi Bombay.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Observed as declared by Port Authorities. Non-working days when work not permitted even on payment of overtime: Republic Day (26th Jan.) and Gandhi Jayanti (2nd October).

POLICE: Tel. 49.

SHORE LEAVE: Permission may be obtained (Chinese personnel not allowed to land on shore).

AUTHORITY: Port Officer, Karwar.

BHAVNAGAR: 21.47 N. 72.08 E.

DOCUMENTS:
Ship's Register.
Load Line Certificate.
Safety Equipment Certificate.
Safety Radio Certificate.
Last Port Certificate.
Manifest on prescribed form (3 copies).
Declaration of private and personal property.
Crew List.
Customs circulation copy issued by Boarding Officer of last Indian Port of call.
Place and date of deratisation certificate.

PILOTAGE: Pilotage should be arranged in advance through ship's local Agent who may be contacted via the port radio, call-sign VUJ-9. An ETA should be sent at least 48 hours in advance in order to arrange Pilot. Pilotage is compulsory. Pilot boat does not have VHF, but may be contacted by light or flag signals. Pilot station is 4.5 miles N.N.E. of Piram Island Lighthouse and Pilot boat will only be on station when the vessel is scheduled to arrive. Vessels should arrive at Pilot station about 2 hours prior to time of high-water and are advised not to anchor awaiting a Pilot but to make a reciprocal course until arrival of the pilot boat.

ANCHORAGE: Vessels up to 31 ft. draft are advised at anchorage Eastward of perigee light vessel. Maximum limit of draft for vessels working at anchorage is 32 ft. at present. If, however, at future date it becomes necessary to find suitable anchorages for vessels more than 32 ft., this area is likely to be farther Eastward (about 3 to 4 miles) from present anchorage area and this is likely to raise fresh problem of operation of lighters due to increase in distance involved. At present the issue has not arisen as the maximum limit of draft of 32 ft. is fixed for vessels at anchorage. All vessels at anchorage are loaded and discharged by means of lighters.

MAX. SIZE: Up to 500 ft. length, and up to 65 ft. breadth may berth alongside.

Permissible draft for a particular tide is arrived at by subtracting 13 ft. from predicted height of high-water for that particular tide.

HEALTH: Healthy ships are granted pratique by the Pilot. International health regulations are applicable to vessels arriving from yellow-fever areas.

RADIO: Bhavnagar Port Radio, call sign VUJ-9 should be used for routing ETA messages, and is also used by Agents in cables to shipping.

TUGS: Tug assistance is available for berthing and unberthing vessels in inner harbour. Position where tugs join the vessel is dependent upon prevailing weather conditions. Usually ship's lines are used in connections to tug.

BERTHING: Berthings are as per tides and according to permissible drafts.

STEVEDORES: The stevedoring gangs are arranged directly by Agents through approved stevedores.

MEDICAL: Medical facilities can be arranged by Master through Agent. Hospital facilities available in city of Bhavnagar which is 13 km. from port.

TANKERS: No facility for oil tankers.

DENSITY: 1025.

FRESH WATER: Fresh water supplied alongside jetty as well as at anchorage.

Shipmasters Report: Water is often in short supply, and ships may be unable to obtain any at all at the anchorage. Ships should not rely upon an evaporator to make water at the anchorage, due to the high mud content of the sea water.

FUEL: Oil bunkering available in limited quantity.

FIRE PRECAUTIONS: Alongside jetty fire-fighting facilities available. At anchorage fire-fighting facility is provided by the tug. Usual fire precautions applicable.

DEVELOPMENTS: Intensified dredging operations are proposed to be undertaken for increase in drafts of the steamers berthing.

GANGWAY/DECK WATCHMAN: Gangway and deck watchman are recommended.

OPENING/CLOSING HATCHES: As arranged between the Master and stevedores.

SHIP'S CERTIFICATES: Registration; Safety equipment; Safety Radio and Telegraphy; International Load Line.

CUSTOMS ALLOWANCES: As per Customs regulations in force from time to time at Indian ports.

CARGO GEAR: Ships should possess valid Cargo Gear Certificate.

CREW IDENTIFICATION CARD: Valid international passport or identification card necessary.

CONSULS: No consulates at port. Nearest consulates are at Bombay.

REPAIRS: No repair facilities exist for the ship except repairs of minor nature which could be undertaken by private repair firms.

DRY DOCKS: Small dry dock available for repairs of vessel of up to 200 ft. length.

REPATRIATION: Possible.

AIRPORT: Bhavnagar city is served by an airport situated about 7 km. from the Port. Regular flights to Bombay are available daily.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Holidays in all 8 in a year declared by Port Authorities on which working of the ship can be attended at the option of the port.

POLICE/AMBULANCE/FIRE: Police force and ambulance and fire facility available from Bhavnagar city. Limited fire-fighting facility available at port.

TELEPHONES: No facility is available for providing telephones on board the ships.

GENERAL: Port equipped with 3 berths having 6 cranes with 3-ton capacity. Cranes available for loading or discharging ship's cargo.

SHORE LEAVE: Citizens of The Peoples Republic of China and Pakistan not allowed ashore. All other nationals are allowed to go to Bhavnagar city which is 13 km. from port for which shore passes are issued by Customs Dept.

REGULATIONS: Photography in port prohibited. No crew member allowed to take liquor ashore.

DELAYS: Delays in berthing depend upon number of ships working on berth and awaiting if any. At anchorage generally not more than 2 ships are worked at a time.

AUTHORITY: Port Officer.

BOMBAY: 18.56 N. 72.49 E. (See Plan Book)

PORT LIMITS: Vessel is considered to have "arrived" when Pilot is embarked and/or when vessel is required to anchor outside pilotage area awaiting a suitable tide, as in the case of large tankers.

DOCUMENTS: See "Calcutta".

PILOTAGE: Motor pilot vessel *"Venu"* stationed 18° 51′ N. 72° 49.5′ E. White, buff-coloured funnel, "Pilot" painted black capitals, exhibiting International Signals by day/night. Call sign "ATDZ".

Minimum advance notice 24 hours to Agents and Harbour Master through Bombay Radio (VWB) and 12 hours to pilot vessel on WT. Pilot vessel contacted VHF Channels 12, 14 and 16. In case pilot vessel not on station, vessels advised anchor at Pilot station, draft permitting, and wait instructions.

ANCHORAGES: More than 60 anchorage berths radius 1,000 ft. with depths from 38 ft. to 14 ft.; of these two 38 ft.; 30 between 30 ft. and 35 ft.; 22 between 20 and 30 ft.; remainder below 20 ft. All anchorages safe.

RESTRICTIONS: According to state of tide and draft.

MAX. SIZE: For Butcher Island Marine Oil Terminal: Normally max. length 700 ft. However, tankers 800 ft. length can be berthed provided adjacent berth occupied by medium-size tanker. Draft restrictions as follows: (depth of water at low tide.)

No. 1 Bl	37 ft.-09 in.	Subject variation.
No. 2 Bl	36 ft.-06 in.	
No. 3 Bl	38 ft.-05 in.	

Pir Pau Oil Berth: max. length 525 ft. Depth at low tide 28 ft. (subject variation). Buoy fixed for berthing 560 ft. tankers.

Docks	*Max. length*	*Max. width*	*Max. draft (subject to tide)*
Indira	666 ft.	95 ft.	34 ft.
Victoria	460 ft. by day and 400 ft. by night	77 ft.	23 ft.
Prince's	500 ft.	61 ft. 3 in.	22 ft.

PRATIQUE: The Master of every vessel calling Bombay from a foreign port must send the following particulars by cable to "Quarantine Bombay" 24 hours prior to arrival and request for radio pratique:

AAA ports of loading BBB last port of call CCC date of departure DDD ETA discharging port EEE vessel's maritime Declaration of Health is negative and total number of crew on board all healthy FFF vessel has not called at any port in East Africa between Northernmost point of Eritrea and Southernmost point of Tanganyika including Zanzibar or any other yellow fever infected area within last 30 days GGG no unusual mortality of rats on board HHH no monkeys ill no persons embarked at Aden or Djibouti.

If the vessel is coming from a yellow fever area, then the Port Health Officer boards the vessel for inspection before granting free pratique.

RADIO: Bombay Coastal Station, call sign VWB.

Information regarding weather will be broadcast at 0630 and 1030 hrs. local time on 2000 m.

RADAR/VHF: No port radar service. Shipmaster contacts pilot vessel by ship's radio or VHF on international frequencies. Channels No. 12 and 14 also available on VHF.

TUGS: Tugs join vessel when close dock entrance and assist undocking. Ship's and tug's lines used.

BERTHING: *Indira Dock:* 21 berths, able to handle cargo vessels up to 20,000 d.w.t. Average length of berth 150 m. Most berths are equipped with one 6-ton crane and four 3-ton cranes.

Victoria Dock: 15 berths, able to handle vessels up to 5,000 d.w.t. Average length of berth 110 m. Most berths are equipped with 1.75 ton and 1.5 ton cranes.

Prince's Dock: Length 1,560 m. of which 1,200 m. is available for handling cargo. There are 8 berths able to handle vessels up to 5,000 d.w.t.

Ballard Pier: Length 244 m., width 110 m., when converted will handle passenger vessels up to 30,000 g.r.t. and cargo vessels up to 22,000 d.w.t.

The extension at Ballard Pier will be the new passenger terminal and will receive passenger vessels up to 30,000 g.r.t. at any stage of the tide.

CONTAINER HANDLING FACILITIES: New container terminal at Indira Dock No. 12B. Total area 12 acres. In the first phase the facility will have a Coles Colossus 200 ton mobile crane, Stothart & Pitt semi-automatic spreaders and various mobile container equipment.

A gantry crane will be installed at a later date.

CRANES: *Quay side:* Electric and Hydraulic cranes available at Indira, Prince's and Victoria Docks.

Mobile Cranes: 56 mobile cranes with capacities up to 43 tons available.

Heavy lift: Electric crane of 60 tons and steam crane of 20 ton capacity.

Floating cranes: 2 available, 60 ton and 125 ton capacity.

STEVEDORES: Supplied by Dock Labour Board. Port Trust supplies shore labour for handling cargo including stacking in sheds.

MEDICAL: Hospital facilities available. Notice in sufficient time, depending on seriousness of case, to arrange for transport, hospitalisation, etc.

TANKERS: Reducing pipe connections available at jetty. Dirty ballast tank available at Marine Oil Terminal. 3 berths at Butcher Island and 1 berth at Pir Pau exclusive to tankers. For draft details see "Max. size".

Pir Pau can handle tankers up to 16,000 d.w.t. and the Marine Oil Terminal at Butcher Island can handle tankers up to 54,000 d.w.t. at 2 berths and 36,000 d.w.t. at the other berth.

DENSITY: The Port of Bombay is essentially a salt water port and major fluctuations in the density occur on account of tide. Density varies mostly in monsoon period June to September.

FRESH WATER: Available all berths. By water-boat in stream, by water-mains in docks.

Ship Officer's Report: Vessel berthed at Ballard Pier, East side. Fresh water availability on pier dependent on capacity of storage tank at the time of call. The water was not available continuously and we had to wait for the tank to be refilled.

FUEL: Arranged by oil companies through Agents. Facilities at berths in docks and Butcher Island berths. No bunker facilities for vessels at anchor.

FIRE PRECAUTIONS: All regulations of Petroleum Rules (chapter 1/50 of BPT Port Rules). Port maintains fire stations, 24 hours per day, both at docks and at Butcher Island Oil Terminal. Special precautions taken for tankers at Marine Oil Terminal at Butcher Island.

DEVELOPMENTS: Satellite port in Nhava/Shewa area proposed also new harbour near Sassoon dock for trawlers drawing 5.5 m.

GANGWAY/DECK WATCHMEN: No deck watchman supplied. BPT gangways generally available all berths except Butcher Island and Pir Pau.

CERTIFICATES:

International Safety Equipment Certificate.
International Safety Radio Telegraphy Certificate.
International Safety Radio Telephony Certificate.
International Exemption Certificate (Deratisation).
International Load Line Certificate.

CARGO GEAR: Compliance BPT Port Rules and Docks By-laws essential. Hydraulic Quay Cranes, Electric and Heavy Lift Cranes, Floating, Mobile and Crawler Cranes all available.

IDENTIFICATION CARDS: Necessary for Police/Customs authorities.

REPAIRS: All repairs possible.

DRY DOCKS: Two: "Merewether" 525 ft. long, 65 ft. 6 in. wide. "Hughes" 1,000 ft. long, 100 ft. wide.

REPATRIATION: Can be arranged, also crew changes.

AIRPORT: International Airport Santacruz, 15 miles from Bombay Harbour.

TIME: Indian standard time ahead of GMT by 5 hours and 30 minutes. No alterations to clocks are made any time.

HOLIDAYS: Holidays for the docks (when cargo handling is closed) are fixed every year. Republic Day (January); Bakri-Id (February); Holi (2nd day) (March); Muharram (March); Maharashtra Day (May Day); Buddha Jayanti (follows May Day); Independence Day (August); Ganesh Chaturthi (September); Mahatma Gandhi Jayanti (October); Dasara (October); Diwali (November); Ramzan-Id (December); Christmas Day.

POLICE/AMBULANCE/FIRE: Police 100; Ambulance 102; Fire 101.

TELEPHONES: Arrangements for placing a telephone on board ship exist at all transit sheds in Docks.

SERVICES: Tank cleaning equipment is not available. Dirty ballast accepted in tank at jetty at Marine Oil Terminal.

REGULATIONS: Stringent Port Rules and Docks By-laws detailed in "Bombay Port Rules".

AUTHORITY: The Chairman, Bombay Port Trust.

CALCUTTA: 22.32 N. 88.22 E. (See Plan Book)

DOCUMENTS:

Ship's Register.
Load Line Certificate.
Safety Radio Certificate.
Safety Equipment Certificate.
Deratisation Certificate.
Port Clearance from Last Port.
Indian Coast Light Dues Receipt (if any).
4 copies of Crew List.
4 copies of Passenger List.
1 copy of Through Cargo Manifest.
4 copies of Stores List.
1 copy of Cargo Manifest with B/Lading for the same.
4 copies of Opium and Dangerous Drugs Certificate.
Cargo Plan.
Cargo on Deck declaration.
4 copies of Certificate of Foreign Currency.
4 copies of Certificate of Arms and Ammunition.
Letter to Assistant Collector of Customs regarding Local Agency.
Letter to Assistant Collector of Customs regarding duty on ships stores.
Application to the Inspector of Police.
3 copies of Arrival Report.
4 copies of Watches and Clock List possessed by each member of the crew.

PILOTAGE: Telegraphic address of Pilot station: VWST "Pilots Sandshead". Radio message should be sent 48 hours prior arrival giving (a) ETA Eastern Channel Lt. Vs.; (b) from . . . . to . . . . (either Haldia, Budge Budge, or Calcutta); (c) deepest *fresh* water draft; (d) length overall; (e) g.r.t.; (f) whether VHF is or is not on board.

Pilot boards vessel Sandheads from pilot vessel fitted with W/T, DF, radar, echo sounder and other navigational equipment, maintains continuous watch on 500 kc/s. (600 m.) and receives ETA messages of incoming vessels.

As an aid to navigation, navigable channel in river is marked with lights and channel buoys. There is a lighthouse at Saugor and downstream from this point, 3 attended Light vessels are stationed at the Western Channel and 2 unattended Light Vessels at Gabtola and Lower Long Sand at Sandheads. Navigable channel leading to port from sea is about 126 miles long. 14 bars are in different reaches of river, 11 of these are upstream of Diamond Harbour and remaining 3 in estuary below Diamond Harbour. Since these bars are subject to fluctuations and there are sharp bends in river, the navigation of ships between port and sea requires services of trained Pilots employed by Port Trust. River Pilots take charge of vessels at Sandheads, navigate to Garden Reach and then make over to harbour Pilots who manoeuvre vessels to riverside jetties, moorings or dock entrance lock. Movement of ships inside docks guided by Berthing Masters.

ANCHORAGES: Anchorage in river Hooghly at Saugor Roads, Halida, Kalpi, Diamond Harbour, Royapur, Ulubaria and Garden Reach of which Royapur, Ulubaria and Garden Reach utilised only by ships on passage to and from the port in emergency. Depths of anchorages vary on day to day basis according to River Draft Forecast but on average 30 ft. deep.

RESTRICTIONS: Navigation on River Hooghly is carried out only with Pilot on board and according to tide. Speed of vessel important factor and must be declared to Pilot on board, preferably telegraphed 48 hours in advance to Pilot vessel.

MAX. SIZE: Maximum LOA 565 ft. with beam of 80 ft. for Nataji Subhas Docks and 515 ft. LOA with beam of 70 ft. for Kidderpore Docks. Maximum LOA of tankers for tanker terminal at Budge Budge is 620 ft. No restriction of beam for vessels berthed in Budge Budge only, as no lock entrance. Deepest draft alongside dock berths in Nataji Subhas and Kidderpore Docks 8.70 m. At Budge Budge deepest draft at any berth 9.00 m. Berthing of vessels, depends on prevailing draft of day published in Draft Forecast for month.

PRATIQUE: Procedure for obtaining pratique: To obtain Radio Praitque incoming vessels communicate by wireless to Port Health Officer, Calcutta, Cable address: "Quarantine Calcutta":

(a) No sickness or death from sickness on board within last 15 days.

(b) No sand, earth, pig, poultry, crew or passenger taken aboard from E. Coast of Africa between Port Sudan and Durban, both ports included.

(c) Ship not touched within last 30 days any port in E. Africa between Northernmost point of Eritrea and Southernmost point of Tanganyika, including Island of Zanzibar or any other yellow fever infected area.

(d) No abnormal mortality of rats or mice on board.

(e) No monkey on board.

(Item *(a)* to be sent in code under usual standard quarantine messages required by ships; rest in plain language through local wireless station.)

In case of any suspected disease or fever on board, local Agents may be contacted by cable who arrange for doctor to be sent or for removal of a patient if necessary. Vessels calling at another port in same country are exempted from obtaining pratique.

RADIO: Calcutta Radio, call sign VWC. R/T. and VHF.

Information regarding weather distributed at 1030 and 0630 hrs. local time on 2000 m.

TUGS: Tugs used for vessels after passing lock entrances at Nataji Subhas and Kidderpore Docks. Tugs used for vessels to turn. Vessels own lines. At Garden Reach sailing on ebb tide.

BERTHING: Vessels brought in for berthing according to tide. Movements from one berth to another inside dock not dependent on tide, but according to convenience of port. Vessels berthed at riverside jetties or river moorings required to have starboard anchor unshackled in order that stbd chain could be tied to buoy on arrival. After first chain is shackled on, port anchor is unshackled and 2 pieces of chain, each 30 fathoms long are removed from port cable and sent aft by boat and made fast to buoys etc, and tied to stern of ship. The remaining port cable is tied up to another buoy forward. Vessels at river jetties and river moorings if left during Bore Tide are to comply with following:

Half an hour before low water:

(a) Gangway to be hoisted up, if ashore.

(b) Pipe-lines disconnected and triced up (for vessels at Budge Budge Jetty).

(c) Heave tight on forward chains to keep vessel about 6 ft. off jetty or pontoon. Make sure weight is on bore springs and not on chains aft.

(d) Tighten all buoy ropes.

(e) When bores expected, all vessels in stream shall have steam on main engines, windlasses and winches and a sufficient number of officers and crew on board to tend vessel in case of emergency.

After bore made, and vessel stopped ranging, slack forward chains to old mark. Bore springs could be had through Agents from local suppliers.

Baj Baj (oil terminal) on banks of River Hooghly has river jetties, hence above instructions also apply to vessels berthed at Baj Baj Jetties.

At Baj Baj two lengths of chain provided by Port Trust for stern moorings.

BULK HANDLING FACILITIES: There is 1 semi-mechanical berth in Nataji Subhas Docks for handling iron-ore suitable for vessels up to 18,000 d.w.t. and up to 24 ft. 6 in. draft. See "Haldia".

BRIDGES: 2 bridges, 1 collapsible, 1 swing, situated inside Kidderpore Dock are open for navigation to suit convenience of port.

TANKERS: Not permitted discharge residue into dock (at C berth Nataji Subhas Dock).

S.G.	A.P.I. of local types of oil
0.91 and 0.94	0.9430 varying to 0.9550.

Tanker terminal at Baj Baj 15 miles from Calcutta Port.

BB Jetty	No. 1	for accommodating	vessels of OAL	620 ft.
,,	No. 2	,,	,,	,, 430 ft.
,,	No. 3	,,	,,	,, 230 ft.
,,	No. 4	,,	,,	,,
,,	No. 5	,,	,,	,, 620 ft.
,,	No. 6	,,	,,	,,
,,	No. 7	,,	,,	,, 510 ft.
,,	No. 8	,,	,,	,, 620 ft.

Deepest draft alongside jetty berths 9.0 m., but vessels brought up according to prevailing draft as per forecast.

STEVEDORES: 48 hours notice of arrival at Pilot station required by Agent.

MEDICAL: Masters in need of medical services required cable Agents. Hospital facilities. Ships leaving for foreign port or minor Indian port (where no Port Health Officer) required to ensure officers and crew have valid health certificates (for cholera, smallpox and yellow fever if proceeding to a yellow fever area).

DENSITY: Average density in port is about 1000.

FRESH WATER: Fresh water on application from Masters or Agents and preferable if at least 48 hours notice given. Supplies through barges and direct from quayline.

FUEL: Redwood 600/700 sec. supplied at Calcutta and require at least week's notice for supplying vessels lying inside dock. Fuel also supplied at Budge Budge terminal, 3 days notice to suppliers and Port Authorities.

FIRE PRECAUTIONS: Usual non-smoking precautions and Master, Owners, Charterers or their Agents of vessels carrying import cargo or intending to load export cargo of hazardous or inflammable nature, furnish 6 copies of list of cargo involved to Traffic Manager in prescribed form, at least 10 days before vessels intend to land or ship cargo. Traffic Manager on receipt of list, categorise items enumerated in list and landing delivery and storage of such cargo be done strictly in accordance with instructions.

DEVELOPMENTS: Refer to "Haldia".

GANGWAY/DECK WATCHMEN: Necessary and recommended by Agents at rate of 3 watchmen per shift of 8 hours.

OPENING/CLOSING HATCHES: Normally undertaken by stevedores, unless specifically mentioned that same will be attended to by crew.

CUSTOMS ALLOWANCES: 0.25 lb. tobacco and 200 cigarettes. Wine and/or Spirit: 1 bottle of wine or spirit per head for consumption on board.

CONTRABAND: Regulations provide that a vessel shall be liable to confiscation which is or has been in Indian Customs' waters where constructed, adapted, altered or fitted in any manner for the purpose of concealing goods.

The act also provides for a fine in lieu of confiscation which could in theory be up to the value of the vessel.

Indian Customs Authorities regard vessels as subject to the regulations if they have any alterations to the normal structure of the vessel or its fittings which is not of operational value, e.g. holes cut in panelling (over bulkheads) which are frequently found concealed from view behind cabin furniture such as settees, bunks desks, wardrobes, etc. Customs invariably impose fines for such cavities even though empty of about Rs. 5,000/-for 1 or 2 cavities and increasing if more cavities are found. Fines would be substantially higher if cavities in fact contained contraband.

To minimise fines it is essential that Shipowners should instruct their Masters to organise periodic anti-smuggling searches of all accommodation and other places in the vessel by ship's officers with a view to locating any cavities or contraband and such searches, and results thereof, should be logged. Furthermore, the Customs Authorities invariably obtain a statement from the occupant of the cabin whether instructions had been issued by the Owners or Master for each officer crew member to search his own cabin for cavities or hiding places or other unusual or irregular tampering with the normal structure of the cabin and to report to the Master any such cavities, hiding-places or such other unusual tampering found at any time whilst serving on the vessel.

If no such instructions have been issued, the Customs generally regard the Owners/Master as failing to take proper anti-smuggling precautions and the risk of increased Customs fines arises.

It is suggested that appropriate instructions should accordingly be issued without delay by all Masters to their officers and crews and that each officer or crew member should acknowledge receipt in writing of such instructions. It is also emphasised that such instructions should also be notified to any officer or crew member who joins the vessel after first issue of the instructions to the existing officers and crew.

CARGO GEAR: Proof of cargo gear tested by a competent authority required.

IDENTIFICATION CARDS: Not necessary if holding seamen's books or passport.

CONSULS: (Telephone Numbers)

USA	44–3611	Liberia	46–1164
Australia	22–1554	Nepal	45–2024
Belgium	44–3886	Netherlands	23–4442
Brazil	45–2120	Norway	22–4094
Bolivia	23–5615	Nicaragua	44–1329
Burma	22–7071	Pakistan	44–5208
Denmark	23–4069	Peru	23–2331
Dominican		Panama	47–6765
Republic	55–5067	Spain	23–5539
Egypt	45–4168	Sweden	23–2243
	45–2507	Switzerland	44–8039
El Salvador	55–7392	Thailand	46–0837
Finland	22–4602	Turkey	34–2770
France	23–2958	UK	44–5171
Czechoslovakia	46–4542	USSR	44–2006
Greece	23–5615	Venezuela	23–5615
Haiti	34–2673	Poland	44–7144
Italy	45–1411	Yugoslavia	44–6881
Japan	44–5455	Philippines	22–0514

REPAIRS: All types of deck and engine repairs undertaken.

DRY DOCKS: 5 dry docks owned by Port Trust available. 3 in Kidderpore Docks and 2 in Nataji Subhas Docks, dimensions as follows:

Dry Dock (Kidderpore) (1) 547 ft.×69 ft.×25 ft. (2) 497 ft.×69 ft.×27 ft. (3) 350 ft.×60 ft.×23 ft. (max. length of vessel 500 ft. max. beam 64 ft.).

Dry Dock (Nataji Subhas) (1) 581 ft.×80 ft.×22 ft. (2) 596 ft.×80 ft.×22 ft. (max. length of vessel 550 ft. max. beam 75 ft.).

Nataji Subhas Dry Docks arranged in tandem and used as one dock. Power supply, compressed air and fresh and unfiltered water supply, hydraulic capstans for propeller work and cranage service including heavy-lift available all dry docks. Each dock provided with automatic telephones for use on board ships.

REPATRIATION: Facilities exist for effecting crew changes and arranging any necessary repatriation.

AIRPORT: 12 miles; served by regular international airlines with minimum 1 flight per day.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Closed Holidays (when no work is permissible): Independence Day, Republic Day, Gandhi's Birthday, Vijaya Dashami and Kali Puja.

Holidays when double wages payable: Saraswathi Puja, Netaji's Birthday; Idul Fitr, Dholjatra, Muharram, Bengali New Year, May Day, Fateh Duaz Dahan, Durgapuja, Guru Nanak's Birthday, Id and Christmas Day.

POLICE/AMBULANCE/FIRE: Police (port) tel. 45–1701 and ask Port Police or dial 100; Ambulance dial 102 or 45–4163; Fire dial 101 or 45–1701 and ask Fire Fighting Service.

TELEPHONES: No arrangements for installing telephones on board, but use of telephones from Port Trust's/ Superintendent's Office on each dock.

GENERAL: *Important:* Masters of vessels in port should ensure that vessel's engines are not immobilised without prior permission of the Harbour Master.

SERVICES: Tank-cleaning equipment with minimum notice of at least 7 days. Discharge of tank-washings not permitted while vessels lying in dock. Compass and radar technicians available.

SHORE LEAVE: Seamen permitted to go ashore after cleared by Immigration Officer boarding vessel on arrival. In case of Chinese, special permission to be obtained from Immigration Authorities, through vessel's Agents.

REGULATIONS: Booklet "Dock and Jetty Handbook" supplied free by Port Commissioners to incoming vessels.

DELAYS: Delays occur during monsoon.

AUTHORITY: Calcutta Port Trust.

CALICUT: 11.15 N. 75.46 E.

DOCUMENTS:

Register.

Articles of agreement in the case of foreign-going vessels staying in port for more than 48 hours.

Nominal list of crew and passengers and the A & B Certificates.

Bill of Health in the case of a vessel arriving from an infected port.

Clearance from last port.

Port and Light dues receipts.

Vessel's manifest and any other document, which may be necessary.

PILOTAGE: No pilotage available.

ANCHORAGE: With Lighthouse bearing 074° in 5 to 5.5 fathoms. Mud – good holding ground.

HEALTH: In the case of all infected vessels Health Officer proceeds aboard, and in the case of all other vessels Health Officer may proceed on board and examine vessel. Master shall give every facility for examination of passengers, crew, personal effects, cargo, provisions, water-supply and any part of vessel Health Officer considers necessary to examine. Health Officer may require written declaration from medical officer (if any) of vessel or from Master (or from both) stating whether any death or sickness from an unknown or suspicious cause or any case of any disease occurred on board either during voyage or before departure, and whether any unusual mortality has been observed among rats on vessel. If Health Officer satisfied that such deaths or cases of sickness as may have occurred were not due to any of diseases specified he shall permit vessel to proceed to usual place of anchorage or berth in harbour and to discharge passengers and cargo without further restriction. Inspection by Health Officer not between sunset and sunrise except in unusual circumstances.

RADIO: Messages through Cochin Radio or Mangalore Radio.

SIGNALLING: The signal station is situated close North of the lighthouse. The station is manned 24 hours a day.

VHF is likely to be installed 1979.

TUGS: 3 motor tugs for towing lighters.

BERTHING: No berths.

STEVEDORES: Arranged through Agents and stevedore contractors.

MEDICAL: General Hospital and Medical College Hospital situated about 1 mile and 5 miles away respectively.

DENSITY: Sea water – 1025.

FRESH WATER: Available, water barge capacity 200 tons. 12 hours notice required.

FUEL: Available. Small quantity of 30 tons can be provided, 48 hours notice required.

DEVELOPMENTS: Dredging commenced at Beypore and expected to be completed within a year or two and then ships of 18 ft. draft can be berthed alongside.

CERTIFICATES:

Registry.

Radio Telegraphy.

Safety Equipment.

Load Line Certificate.

Certificates of Competency of Captain and other officers.

IDENTIFICATION CARDS: Necessary.

CONSULS: Nil.

REPAIRS: Minor repairs possible.

DRY DOCKS: Small slipway at Beypore.

AIRPORT: Construction of airport at Calicut is under consideration by the Government.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Holidays declared by the State Government are holidays for the port. Cargo work can be arranged on holidays.

FIRE/AMBULANCE/POLICE: Police 100; Ambulance 100; Fire 100.

GENERAL: Ship-to-shore signalling is normally by morse light.

SHORE LEAVE: Permitted.

AUTHORITY: Port Officer.

COCHIN: 09.58 N. 76.15 E.

DOCUMENTS:

7 Crew Lists.

7 Passenger Lists.

1 Last Port Clearance.

4 Store Lists, including List of arms and ammunition.

5 Passengers' and Crew Personal Effects Declarations.

4 Cargo Manifests.

3 Cargo Certificates.

3 Deck Cargo Certificates.

3 Opium Certificates.

3 Currency Declarations.

PILOTAGE: Berthing arrangements, booking of Pilot, etc., normally done by Agent. Advisable send ETA messages at least 48 hours in advance to Agent. Amendments to ETA messages must be sent at least 12 hours in advance. ETA messages may also be sent to Harbour Master, Cochin Port Trust. Messages should contain time and date of arrival at outer roads in IST and also draft fore and aft (in fresh water). On arrival, information must be sent to Signal Station by aldis and sharp watch maintained for further instructions.

No Pilot vessel on station in outer roads. A Pilot boat with red hull and white superstructure exhibiting the normal international Pilot signal comes out to outer roads for embarking and disembarking Pilots. No special light or sound signal need be made for Pilots. All ships awaiting Pilot in outer roads must have engines ready at all times to enter harbour (unless instructed otherwise). Masters should ensure that a good pilot ladder with 2 manropes is lowered about 2 ft. above water for embarking Pilots. Also while embarking Pilot, lifebuoy must be kept handy, and a good lee given. Pilots must be escorted from and to the bridge, to the embarkation deck. Also see "Restrictions".

ANCHORAGE: Cochin roads is open anchorage with good holding ground of oily mud. Masters are required to anchor vessels in Westerly area from North to South of fairway buoy within radius of 0.5 mile. Deep-drafted vessels may anchor in a Westerly direction from fairway buoy within a distance of 0.5 to 1 mile. To facilitate entry and departure of deep-drafted ships, Masters not to anchor in line with direction of main channel, Westward of fairway buoy.

RESTRICTIONS: Unless otherwise *specifically* instructed, vessels not to enter main channel at any time without Pilot on board. Pilotage compulsory for all vessels over 100 tons gross. No night entry for crude oil tankers.

MAX. SIZE: Maximum size of general cargo ships presently handled is 700 ft. length OA with max. draft 30 ft. *salt water.* Such ships taken in only during slack ebb. Tidal Conditions: In Cochin Port ebb and flood run 2 to 2.5 hours before, to 2 to 2.5 hours after high and low water times. During monsoons, freshets are encountered and there may not be any flood for several days.

PRATIQUE: If a vessel requires radio pratique the Master is to send a message to the Port Health Authorities, Cochin (telegraphic address "Quarantine Cochin") which should contain all items of information set out in the Standard Quarantine message of the International Code of Signals. In addition to the above, he should send the following information in plain language:

1. My Maritime Declaration of Health has negative answers to health questions or my Maritime Declaration of Health has positive answers to health questions (indicated by details) as the case may be.
2. Called at or not called at any port in Ethiopia, Somalia, Kenya and Tanzania and any port from Northernmost point of Senegal to Southernmost point of Angola in West Coast of Africa within 30 days.
3. Have or have not monkeys on board.
4. Have or have not taken any person embarking at Aden or Djibouti.

The message to be sent not more than 12 hours and not less than 4 hours out from port. Masters must send the complete message without omitting any item, and should request specifically for radio pratique.

Ships arriving from yellow fever area within last 30 days, pratique is granted by the Port Health Officer only after inspection. Pilot officer boarding is authorised to grant free pratique on satisfactory completion of Maritime Declaration of Health by the Master of healthy ships only.

Port Health Officer usually inspects crew before vessel sails.

RADIO: Cochin Radio, VWN, operating 24 hours daily. VHF Station at Harbour Master's Office, contact Channel 16.

TUGS: Presently 3 tugs; 2 of 1,000 h.p. and one of 1,400 h.p. Normally, tugs join off Vypeen and tug's wire used as necessary.

BERTHING: If particular ship required arrive at certain time, Agent informed in advance.

CARGO HANDLING: Modern systems of cargo handling such as pre-slinging and palletisation are commonly used. The numbers of fork lift trucks, mobile cranes and tractor trailers have been augmented for the purpose. International containers are also handled at the conventional berths using ship's own gear for export of shrimps and import of machinery.

There are 8 general cargo wharf berths, 2 coal berths, 1 boat-train pier jetty, 2 tanker berths, 2 low wharves and 1 open berth. The open berth (555 ft. 6 in.) is being extended to 808 ft. and the work is nearing completion. It is proposed in the fifth plan (1974-79) to convert the open berth into a container berth in a flexible way. It is also proposed to have a mechanised fertiliser berth for bulk handling fertilisers, sulphur, rock phosphate, etc. Cargo is also handled at the 12 stream moorings. At present, containers also handled at the general cargo wharf berths using ship's derricks. No facility exists for roll-on/roll-off traffic. Liquid chemicals can be handled at the wharf berths.

STEVEDORES: Booking of gangs undertaken by Agent on receipt of ETA message.

MEDICAL: Medical attention easily available in Cochin. If medical attention required immediately on arrival, Agent to be informed when sending ETA. Valid inoculation and vaccination certificates against cholera, yellow fever and smallpox are essential.

TANKERS: Only 2 tanker berths at Cochin at present. Maximum permissible draft 30 ft. *salt water*.

Length limited to 700 ft. OA at North tanker berth and 560 ft. OA at South tanker berth.

Deep draft tankers berth only on ebb tide and during daylight hours. Ballasted or loaded tankers can sail any time.

DENSITY: Varies from 1000 to 1020 depending on tidal and weather conditions.

FRESH WATER: Available from alongside jetties and from barges at moorings. Advance notice to be given Agent regarding amount of water required. Cost Rs. 3.50 per 1,000 litres for supply through water barges and Rs. 3/-per 1,000 litres for supply at docks, quay and jetties.

FUEL: All grades fuel oils normally available. Essential give advance notice to Agent to make necessary arrangements.

FIRE PRECAUTIONS: Fire wire to be fast and ready on quarter facing channel.

DEVELOPMENTS: The revised Fourth Five-Year Plan (1969-70 to 1973-74) for port development includes the construction of an inshore oil dock for tankers of 80,000 d.w.t. and 1 fertiliser berth, both having a draft of 40 ft. While preliminary steps have been taken on the former, the latter scheme has been postponed to the Fifth Plan. The extension of the existing Open Berth Quay 9 from 505 ft. 6 in. to 808 ft. has almost been completed. The plan also aims at the procurement of 3 new dredgers, 1 high-power tug, various cargo-handling equipments, etc., besides the improvement of the port's infra-structural facilities. A Fisheries Harbour Complex is being developed near the port to provide modern landing facilities for fish catches by deep-sea trawlers.

The Fifth Five-Year Plan for port development (1974-75 to 1978-79) aims at the completion of all the spill-over schemes of the Fourth Five-Year Plan, viz., inshore oil dock, procurement of dredgers, cargo-handling equipment and improvement of infra-structural facilities. Among the most important new schemes of the Fifth Plan, mention may be made of the provision for the purchase of a grab dredger, reclamation in the channels, construction of a new medium-sized dry dock, a fertiliser berth, etc. During the Fifth Plan, container-handling facilities will be provided at the extended Quay 9 berth.

GANGWAY/DECK WATCHMEN: Watchmen available at nominal cost. Recommended employ watchmen at gangway, on deck and in holds.

OPENING/CLOSING HATCHES: Opening hatches normally done by stevedores. Topping derricks and removing locking arrangements on hatches must be done by ship's personnel.

CARGO GEAR: All cargo gear must have valid test certificates and all other factory act requirements must be complied with.

IDENTIFICATION CARDS: Issued by Port Authorities.

CONSULS: Danish, Norwegian, Italian, French and Consular Agent of Switzerland.

REPAIRS: Minor repair facilities available.

DRY DOCKS: Port dry dock can handle ships of up to 217 ft. in length OA. However, not normally available for foreign craft.

REPATRIATION: Facilities for changing crew and repatriation available and can be arranged.

AIRPORT: Airport about 2 miles from harbour area. Cochin airport handles internal flights only.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Closed holidays: Republic Day (26th January); Independence Day (15th August); Gandhi Jayanti (2nd October); 1st May and 25th December.

FIRE/AMBULANCE/POLICE: 6555 Willingdon Island Fire Station; 6005 Willingdon Island Police.

TELEPHONES: Arrangements can be made for telephone connections on board ships on wharf berths only.

GENERAL: Floating crane 120 tons, fire float.

SHORE LEAVE: All nationalities except Chinese, Pakistanis and Portuguese allowed ashore.

AUTHORITY: Cochin Port Trust.

CUDDALORE: 11.43 N. 79.46 E.

DOCUMENTS:
8 Crew Lists.
8 Passengers Lists.
3 Forms of Import Manifest of Stores.
3 Lists of articles in slop chest.
3 Private Property declaration of Crew.
3 Manifests.
3 Bills of Lading.

PILOTAGE: No pilotage. Open roadstead port.

ANCHORAGE: Vessels anchor in 5 to 7 fathoms with Cuddalore Lighthouse bearing 295° to 315°, which is most convenient anchorage for communicating with shore at all seasons of year. Nature of bottom, sand.

RESTRICTIONS: No restrictions regarding entry of vessels during day or night.

MAX. SIZE: Any size of vessel handled.

HEALTH: On arrival, Master to signal Port Health Officer stating all crew well and requesting free pratique. In event of any crew member suffering from suspected infectious disease, Master to advise Agents sufficiently in advance to enable Port Health Officer to board vessel on arrrival. No free pratique necessary whenever vessels call from another Indian port.

RADIO: No radio station. Cables routed through Madras Radio (call sign VWM).

TUGS: None.

BERTHING: No berths.

STEVEDORES: ETA advice required 72 hours in advance to enable stevedores to make adequate arrangements for handling cargo. Average rate of discharging bagged fertiliser 750 tons, and for loading iron ore 2,000 tons per day, expected to increase to 3,000 tons per day.

MEDICAL: No advance notice required unless vessel arrives with crew member requiring immediate medical attention. Seamen can be treated at Municipal Dispensary at Old Town near port and also at Government headquarters hospital in charge of District Medical Officer at New Town about 6.5 km. from port.

DENSITY: Density of water 1024. State of tide does not affect density.

FRESH WATER: Boat with 16.5 tons capacity which goes alongside steamer and this quantity of water supplied. If one steamer at anchorage boat makes 2 trips a day and about 33 tons of water supplied.

FUEL: None.

GANGWAY/DECK WATCHMEN: Services of watchmen recommended in interest of ship to avoid pilferage. 3 watchmen night and day per shift of 8 hours.

OPENING/CLOSING HATCHES: By stevedores.

CERTIFICATES:
Ship's Register.
Load Line Certificate.
Safety Equipment Certificate.
Safety Radio Certificate.
Deratisation Certificate.
Last Port Bill of Health Authority.
Last Port Clearance.

CUSTOMS ALLOWANCES: Tobacco, 200 cigarettes permitted for each crew member to be held out of bond. Wine/Spirit, 1 open quart bottle per crew member permitted to be held out of bond.

CARGO GEAR: Register of cargo gear and machinery to be maintained up to date and to be attested by competent authority.

IDENTIFICATION CARDS: Needed.

CONSULS: None.

REPAIRS: Minor repair facilities available.

REPATRIATION: Facilities exist for effecting crew changes and arranging necessary repatriations.

AIRPORT: Nearest airport at Madras, distant 118 miles.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Cargo work arranged on all holidays except Republic Day, Gandhi's Birthday, Pongal Karinal, Masimagam, Pennayar Festival, Independence Day and Deepavali, on payment of overtime.

POLICE/AMBULANCE/FIRE: Tel. Police 24; Fire and Ambulance 99.

GENERAL: Private launches arranged for purposes of crew going ashore. Such launches ply between 0600 and 1700 hrs. Laundry, provisions, etc., can be arranged.

SERVICES: Cleaning of hatches after discharging cargo available.

SHORE LEAVE: Crew members permitted to go ashore within municipal limits.

DELAYS: No delay of anchoring of vessels. Cargo work carried out during day. No night work.

AUTHORITY: Port Officer, Cuddalore.

HALDIA: 22.00 N. 88.05 E.

Subsidiary deep water modern dock of Calcutta, situated on West bank of Hooghly River and 56 miles downstream of Calcutta.

DOCUMENTS, PRATIQUE: All general information; refer to "Calcutta".

MAX. SIZE: Capital dredging in shipping channel is in progress and the results being constantly reviewed. Currently actual drafts as per draft of the day. Draft forecasts are issued six weeks in advance.

BERTHING: Project in its first phase is expected to be completed by 1978, envisages following.

1. An Oil Jetty – to provide berthing accommodation for supertankers with LOA of approximately 780 ft. and draft up to 35 ft. Operational.

2. A Finger Jetty – equipped with grab-bridge crane capable of transferring salt, rock phosphate and other bulk cargo from ship to barge, or vice versa at an average rate 5,000 tons per day.

3. A Coal Berth – capable of loading bulk carriers of the 60,000 d.w.t. class at rate 3,000 t.p.h. (Under trial).

4. An Ore Berth – rate of loading 6,000 t.p.h. and with provision for increasing to 8,000 t.p.h. Accommodation for carriers up to 80,000 d.w.t. (Under trial).

5. A Fertiliser Berth – for handling rock phosphate and sulphur from ships up to 50,000 d.w.t. class at a rate of 6,000–8,000 tons per day.

6. Two general Cargo Berths – each with a quay of 720 ft. and 120 ft. wide and back-up area of 18 acres. Both will have adequate cranage, latest in cargo handling machinery and direct rail-road facilities. One berth will have a modern 100,000 sq. ft. transit shed and a 30-ton payload Portainer Crane for handling containers.

7. Container Marshalling Yard – area 180,000 sq. ft. served by 1 rail-mounted Transtainer Crane of 30-ton payload, capable of storing 1,500 containers at a time.

AUTHORITY: Calcutta Port Trust.

HONAVAR: 14.16 N. 74.27 E.

DOCUMENTS:

Crew Lists.
Passenger Lists.
Customs Documents.
Health Documents.
Manifests.
Bills of Lading.
Ship's Papers.

PILOTAGE: Open roadstead port. No system of pilotage. Pilot is, however available, on requisition by Master or Agent.

ANCHORAGE: Distance off 3 miles, depth of 5.5 fathoms.

MAX. SIZE: No restrictions on length and breadth. Generally up to 34 ft. draft vessels can anchor within 2 to 3 miles from entrance.

HEALTH: Port Health Officer grants pratique as and when necessary, on requisition.

RADIO: Wireless station at Karwar.

BERTHING: No berthing facilities. Ships anchor on open roadstead.

MEDICAL: Proper hospital facilities available only at Karwar about 60 miles North. At least 24 hours advance notice ETA to be communicated to Agents.

DENSITY: Varies 1020/1025.

FRESH WATER: Very small quantities available. No arrangements for delivery to ships.

FUEL: None.

OPENING/CLOSING HATCHES: By crew.

CERTIFICATES: All ship's papers such as Certificate of Registry, WT Certificate, Safety Equipment Load Line, etc., to be on board for verification.

CARGO GEAR: Cargo gear Test Certificates, etc., to be produced.

IDENTIFICATION CARDS: Needed, if going ashore.

CONSULS: Nil.

REPAIRS: Nearest workshops undertaking major repairs available at Mormugao. Minor repairs may be carried out at Karwar.

DRY DOCKS: None.

REPATRIATION: Facilities available.

AIRPORT: Belgaum, about 178 miles.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Charter Party Holidays observed. Cargo work can be arranged on holidays. Dates of holidays vary from year to year.

POLICE/AMBULANCE/FIRE: Police 48; Ambulance 32; Fire Kumta 20.

SHORE LEAVE: Crew members are allowed ashore.

DELAYS: Generally no delays are expected.

AUTHORITY: Port Officer.

JAKHAU: 23.15 N. 68.37 E.

LOCATION: In Gulf of Kutch, on Godia Creek about 5 miles inside Arabian Sea. Port is about 7 miles West of Jakhau. Small sub-port exporting salt utilised by foreign-going and coastal traffic. Vessels calling Jakhau anchor in open roadstead about 6 miles off shore. Highest tidal range 14 ft. Current parallel to coast running about 4 knots.

AUTHORITY: Assistant Conservator Jakhau–Kutch.

KAKINADA: 16.56 N. 82.15 E.

DOCUMENTS: *(a)* To be supplied by Master on arrival:

Ship's Register.
Safety Equipment Certificate.
International Load Line Certificate.
Deratisation Certificate.
Last Port clearance.
ILH Dues Receipt, if coming from an Indian Port.
Crew List: 6 copies to Agents, 2 copies to Immigration Dept., 2 copies to Customs.
Customs Circulating Copy, if coming from another Indian Port.
Import Manifest of Stores (Store List).
Private Property Statement of crew and officers.

(b) Master to sign following certificates, in prescribed forms, presented by Agents, on arrival:

Port Entry.
Port Clearance.
Customs Entry.
Customs Clearance.
Departure.
Health.

PILOTAGE: No pilotage.

ANCHORAGE: *Allotment of Anchor Berths:*

Masters of vessels calling at the Port of Kakinada should cable the following information to the Port Officer directly, 24 hours before their arrival off the Port:—

(a) ETA (Indian Standard Time)
(b) Total cargo for loading/discharging at Kakinada and nature of cargo.
(c) Hatchwise distribution.
(d) Declaration of hazardous, inflammable and explosive cargo.
(e) Declaration of vessels winches in good working condition.
(f) Draft Fore and Aft.

A specimen cable covering the above is quoted below:

> "Port Officer Kakinada STOP Vessel XXX ETA Kakinada 22/10 0900 Local Time quantity loading 9,500 tonnes rice bran extractions hatch one 1,000 hatch two 2,000 hatch three 3,000 hatch four 3,000 hatch five 500 no hazardous inflammable explosives STOP All winches derricks good working condition draft fore 8 m. aft 9 m."

The above cable sent to the Port Officer (in addition to the cable sent to their Agents as per normal practice) will facilitate proper anchoring instructions from Port authorities to the Master and avoid difficulties in Port operations.

Masters should also keep watch on VHF Channel 16 to receive instructions from Port control and contact Port control on arrival at the approaches to the Port.

Specific instructions will be given by the Port Officer through Port control in respect of anchorage positions. When once anchored as above, Masters should not shift their position without specific reanchorage position given by the Port Officer, unless in case of emergency in regard to the safety of the vessel.

Masters of vessels calling at this port are advised to be in possession of the latest navigation chart corrected up to-date. The Indian edition available is 3009 "Approaches to Kakinada Port" with an inset of Kakinada Bay.

Main engines should not be immobilised without specific permission from Port authorities.

The Godavari Point (sand spit) is extending Northwestwards at a rate of about 170 ft. per annum and a port hand buoy (flashing red) 5 secs. is installed at the tip.

The holding ground anywhere in the anchorage is considered excellent (soft mud and sand).

MAX. SIZE: No restriction. Vessels any size can enter the port.

HEALTH: Masters have to send standard quarantine message not more than 12 hours and not less than 4 hours before arrival. Pratique will be granted by Port Health Officer basing on the quarantine message, which will be instructed to the Agents. Health inspection of the vessel will be carried out by the Port Health Officer at the earliest convenience. Vessels that have touched ports in the yellow fever endemic area within the last 30 days, should send the quarantine message at least 48 hours before the expected time of arrival.

RADIO: Radio stations are Visakhapatnam and Madras.

VHF: VHF radio station is in the Port Office (Port Control) on International frequency, Channels 16 and 12, communication from ship/Port control and vice versa. If ship requires communication on Channel 12, it should be advised in advance to prepare machine accordingly.

The Port control VHF functions round the clock at the following specified times:–

0045 to 0100 hrs.
0345 to 0415 hrs.
0545 to 0615 hrs.
0745 to 0815 hrs.
1045 to 1115 hrs.
1245 to 1315 hrs.
1445 to 1515 hrs.
1745 to 1815 hrs.
1945 to 2015 hrs.
2245 to 2315 hrs.

all times Indian Standard Time.

TUGS: There are 5 small tugs for towing cargo lighters.

CARGO LIGHTERS: There are 94 cargo boats with total capacity of 7,500 d.w.t. In addition 5 self-propelled mechanised barges each of 250 d.w.t. owned by the Port Authorities.

STEVEDORES: Gangs engaged by party doing stevedoring work. In case of liners, Agents attend. In case of chartered vessels, consignees/shippers attend. Master to give ETA with number of hatches to be worked on arrival. Revised ETA to be sent whenever there is change.

MEDICAL: Government general hospital available with specialists. Private nursing homes also available with efficient physicians and surgeons. Agents arrange medical aid on advance intimation. Being roadstead port, launches have to be arranged, hence advance intimation of 6 hours necessary through signal station while in port.
DENSITY: Ranging from 1010 to 1025.
FRESH WATER: Of the 5 mechanised barges owned by the Port Authorities, 1 mechanised barge is used for supply of fresh water up to 200 tons. Privately owned self-propelled barge is also available for supply up to 100 tons. Prior arrangements to be made through Agents of vessels 24 hours in advance.
FUEL: No fuel suppliers. In case of emergency small quantities of 10/15 tons, in 205 litre drums, can be arranged from Visakhapatnam, duty paid.
DEVELOPMENTS: Development programmes include canal protection, transport facilities, provision of 3 new transit sheds each measuring 300 ft. × 60 ft., construction of a 1,000 ft. long boat wharf, navigational aids, power supply to loading/discharging points and stacking yards at shore and providing breakwater of 880 m. in length (sea wall) and mooring circle on the West side of the sand-spit known as Hope Island.
GANGWAY/DECK WATCHMEN: Arranged by stevedores.
OPENING/CLOSING HATCHES: By ship's crew only.
CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes per head per week. Wine and Spirits: 16 oz. per head per week for those who are eligible for supply by ship.
IDENTIFICATION CARDS: Required.
CONSULS: None.
REPAIRS: No facilities. Only minor repairs to winches, welding work, casting and repairing spare parts.
REPATRIATION: Can be arranged.
AIRPORT: Visakhapatnam 105 miles, Madras 350 miles.
TIME: GMT plus 5.5 hours = IST.
HOLIDAYS: Charter Party holidays are observed. Work is done day and night. Port and Customs also work on holidays and out of office hours on payment of overtime. No work even on overtime payment on following days: Bhogi, Pongal, Kanumu. Optional holidays to labour on Chollangi Amavasya, in January.
POLICE/AMBULANCE/FIRE: Police 3052; Fire 101; Ambulance 3311.
SHORE LEAVE: Shore permits given by Port Registration Officer (Immigration).
SERVICES: Fresh and dry provisions available.
NOTARY: Available for noting protest.
AUTHORITY: Port Officer.

KANDLA: 23.00 N. 70.12 E.

DOCUMENTS: To be submitted by Masters on arrival:
Customs: Crew List (3 copies).
Crew Private Property List – this should indicate all items they possess (3 copies).
Ship's Stores List (3 copies).
All valid documents of ship in English for verification of customs boarding officer.
Port Health: {Maritime declaration in duplicate.
Valid crew health cards and Deratisation Certificate.
Agents: Stowage Plan, Cargo Manifest and Bills of Lading.
PILOTAGE: Pilot station situated 22° 49.5′ N.; 70° 07′ E. Loaded vessels can cross bar only during high water. Vessel to report at Pilot station 2·5 hours before high water. Masters to keep Agents closely advised of ETA and anchoring time. 12 hours advance notice to be given by Agents for Pilot. No pilot ship or telegraphic address for Pilot station (Outer Tuna buoy). Vessels can contact Kandla Tower through VHF Channel 16. Pilot station 16 miles away from port. During all weathers vessels have to anchor at above position and await Pilot.

Shipmaster's Report: On calling at Kandla, the Pilot advised that anchorage outside a 2-mile range from the Outer Tuna buoy and the Pilot having to board there, increases the pilotage dues by 100 per cent.
ANCHORAGE: Vessels can anchor 1 mile S.W. of above anchoring position. Inside harbour, anchorages allotted by Port Authorities, and Pilots anchor vessels at suitable positions.
RESTRICTIONS: Being a tidal port, entering and leaving of loading vessels depends on tide, and loaded vessels can cross bar at entrance of channel only during high water.

During hours of darkness max. length for tankers is 575 ft.

Ships having speed of less than 9 knots through the water will not be moved in and out of the port of Kandla during hours of darkness.

Berthing and unberthing of ships at the moorings will be restricted to daylight only. Daily draft forecast for crossing Kandla Bar published at intervals by the Kandla Port Trust.
MAX. SIZE: Max. overall length 740 ft. No breadth restrictions.

For oil tankers max. permissible overall length is 700 ft.

Draft according to water on the bar varies between 28 and 34 ft.

Shipmaster's Report: Max. draft, chart datum (=14 ft.)+rise of tide.
PRATIQUE: The Masters of all ships arriving at Kandla are required to send the Port Health Officer, Kandla (cable address "Sandgrodh") a wireless message embodying all applicable terms of information set out in the Standard Quarantine message of the International Code of Signals. In addition to the International Code message, Masters are also required to give the following information in plain language:

(*a*) Whether there is any abnormal mortality of rats or mice.
(*b*) Whether there is any monkey on board.
(*c*) Whether touched or embarked at Aden or Djibouti any person.
(*d*) Names of all ports touched en-route within preceding 30 days, with dates of departure.
(*e*) Request for radio pratique.

Upon anchoring Pilot station, cable again Sandgrodh stating time anchored and requesting radio pratique.

In cases where the vessels have touched any yellow fever area within preceding 30 days it is necessary for Master, for good order sake, to certify that all officers and crew/passengers on board possess valid yellow-fever certificates.

The Pilot Officer boarding is authorised to grant free pratique on completion of the Maritime Declaration of Health signed by the Master in cases where vessels have failed to obtain radio pratique for any reason. If the Maritime Declaration is not in order, the Pilot refers the Master to the Port Health Officer who then boards the vessel and grants free pratique after his inspection of the vessel.
RADIO: Within a range of 35 hours off Kandla, vessels can contact Kandla Radio on call sign VWK. Before 35 hours off, Kandla can be contacted through Bombay Radio only.
TUGS: Port tugs join ships inside harbour off berth. Ship's wires used.
BERTHING: The cargo jetty provides 5 alongside-berths with total quayage of 3,825 ft. which can accommodate ships drawing up to 30 ft. loaded draft. The cargo jetty is served with 21 electric level luffing cranes, 16 of 3 tonnes, 4 of 6 tonnes and 1 of 10 tonnes capacity for handling cargo from ships.

3 mooring berths are available near the cargo jetty. In addition, there are separate moorings for (*a*) ships loading salt, (*b*) deep draft mooring for ships up to 37 ft. draft.

The Bunder basin has 3 wharves, two wharves with transit sheds. The South wharf is served with 4 quay electric level-luffing cranes of 3 to 10 tons capacity for handling cargo from lighters. The North Wharf is for country craft. The West wharf is provided with a 60 tons capacity electric gantry crane.

Marine unloader with rated capacity of 500 tonnes per hour for discharging bulk fertiliser and its raw materials has been commissioned.
STEVEDORES: Minimum 24 hours notice required for arranging stevedoring labour and gangs. Bulk fertiliser and grain average 1,000 tons and 1,500 tons respectively. General cargo 250 tons per hook, subject congestion prevailing in sheds, wharves, warehouses and clearance, and on number of vessels working at particular period.
MEDICAL: Private Doctors' services available for vessels at berth. For vessels at Pilot station or inner anchorages minimum advance notice of 12 hours and 6 hours respectively required. Very limited facilities of private practitioners. No hospital facilities. Inoculation and vaccination carried out by Port Health Officer (a Government body) – minimum 48 hours notice required.
TANKERS: Tankers with max. overall length of 700 ft., 35,000 tons displacement and 34 ft. draft permitted to berth. 3 main pipe-lines connected to tanks situated about 10 km. from berth, 2 generally used for white oils and one for black oil. White-oil pipe-lines diameter 12 in. and black-oil pipe-line diameter of 16 in. In addition, one 8 in. diameter pipe-line for soyabean oil, one 3 in. diameter pipe-line for acetone and one 4 in. diameter pipe-line for formaldehyde and one 12 in. diameter pipe-line for Phosphoric Acid imported by Indian Farmers Fertiliser Co-operative Ltd.

Shipmaster's Report: Tankers will sometimes be brought in to the port even though a berth may not be available at that time. Such vessel will then be moored to a mooring buoy close to the jetty, awaiting her berth at the tanker pier. Mooring to this buoy is effected by use of the vessel's starboard anchor chain, so that the anchor has to be disconnected from the chain before entering.

In securing alongside the oil-pier, tankers are required to utilise 1 insurance wire fore and aft as supplied from shore. In addition vessel is required to use all her available ropes and wires owing to strong currents – 4 head-ropes, 2 breast-ropes, 2 springs.
DENSITY: Varies from 1020–1030.
FRESH WATER: Can be supplied through shore pipe connection and barges.

Shipmaster's Report: Water is very scarce and should be ordered at least 3 days prior arrival.
FUEL: Furnace oil (heavy oil) and light diesel oil can be supplied. Usually 12 hours advance notice required for bunkering. In event of oil tanker discharging at berth, bunker supply can only be commenced 18 hours after completion of discharge by tanker. Quantities up to 500 tons supplied by tank trucks, above 500 supplied through pipe-lines if berth vacant. However, any quantity can be supplied by tank trucks.
FIRE PRECAUTIONS: 3 sea water fire fighting pumps installed at oil jetty. These pumps are under charge of fire brigade officers and have adequate fire fighting equipment. A tug fully manned with fire fighting arrangements also available at short notice.
DEVELOPMENTS: Berths and bar continuously under dredging and drafts will increase in future.
GANGWAY/DECK WATCHMEN: All ships engage 2 watchmen round the clock at gangway. To look after mooring lines, 8 mooring men (4 each at fore and aft) are engaged round the clock.
OPENING/CLOSING HATCHES: Unless specified in relative Charter Party to contrary, ship's crew to accomplish this work.

SHIP CERTIFICATES:
Registration.
Safety Equipment.
Safety Radio and Telegraphy.
International Load Line.

CUSTOMS ALLOWANCES: 200 cigarettes per week per person. Wine and/or Spirit: 2 pegs of spirit per person per day or 4 pints beer.

Shipmaster's Report: Very strict Customs supervision, particularly in regard to declaration of foreign currency.

CARGO GEAR: Ships should possess valid Cargo Gear Certificates.
IDENTIFICATION CARDS: Required. See "Shore Leave".
CONSULS: Nil.
REPAIRS: Minor repairs carried out. Chipping and painting work also carried out.
DRY DOCKS: A floating dry dock to accommodate small craft up to 70 m. (230 ft.) in length, 10.7 m. (35 ft.) beam and 3.1 m. (10 ft.) draft of max. weight 500 m./tons for repairs, available.
REPATRIATION: Though adequate facilities not available, this can be done in case of necessity.
AIRPORT: Situated about 70 km. from port.
TIME: GMT plus 5.5 hours.
HOLIDAYS: Holidays for each year declared by Port Authorities, are Republic Day, Idu'l Zuha, Muharram, Holi (2nd day), Chetichand, Ramnavami, Good Friday, May Day, Independence Day, Janmashtami, Mahatma Gandhi's Birthday, Dussehra, Diwali (New Year Day), Idu'l Fitr, Guru Nank's Birthday, and Christmas.
TELEPHONES: Available on board, only for oil tankers.
GENERAL: Port equipped with 21 electric level luffing shore cranes of 3 to 10 ton capacity used for discharging all ships alongside cargo jetty. For discharging tankers with bulk grain port's vacuvators belonging to Food Corporation of India used.

Kandla port is a prohibited area where entry and exit are restricted to those persons having bona fide work only. Masters are requested to exercise a strict check at the gangway in order to ensure that only those persons with bona fide business to transact are allowed aboard. In the event that any unauthorised person is found to be aboard the vessel, the matter should be reported to port officials and the police on duty.

Masters are requested to advise their crew in advance of arrival at Kandla that photography within the port area is strictly prohibited, and it is suggested that all cameras should be left in the safe custody of the Master in order that crew members may not violate this regulation inadvertently and become involved in legal proceedings.

SERVICES: Tank cleaning by shore labourers. Tank washings and residue not allowed to be discharged in port area.
REGULATIONS: Photography in port area prohibited. No Crew members allowed to take with them liquor of any kind ashore and not permitted to drink liquor outside port limit.
AUTHORITY: Kandla Port Trust.

KARWAR: 14.48 N. 74.06 E. (See Plan Book)

PORT LIMITS: *North.* A line drawn from Dayamada Point to Parker Rock.

East. Seashore of Karwar bay from Dayamada Point to Badchidar Point 50 yards above high-water mark including Baithkiol Cove, Kalinady and all branches thereof as far as navigable and the shores and banks within 50 yards of high-water mark Spring tides including all islands and thence to Mogera Guda Island (including Mogera Guda Island). All patta lands and other private sites excluded.

South West. A line drawn from Mogera Guda Island through Gudsav Sunv, Westernmost point of Mandal Island to Parker Rock.

DOCUMENTS:
8 Crew Lists.
2 Manifests of Stores.
2 Private Property Declarations.
2 Currency Lists.
1 Maritime Declaration of Health.
3 Passenger Lists (if any).
4 Import Manifests.
1 Last Port Clearance.

PILOTAGE: The approach from Northward is between Oyster Rock Lighthouse and 2 front and rear leading lights on Simshigudda and Kurmagad Islands, respectively, in positions Lat. 14° 50′ 11″ N. Long. 74° 05′ 43″ E. and Lat. 14° 50′ 33″ N. Long. 74° 05′ 59″ E. Vessels approaching from Southward may enter between Oyster Rock Light and Karwar Head. Currents in bay are negligible. Ocean-going steamers are piloted by Departmental Port Officer who is a licensed Pilot. No pilotage charges at present.
ANCHORAGE: Anchorage for shallow draft steamers is with the Port Signal Station, bearing 120° (T), distance 1 to 2 miles, or Oyster Rock Lighthouse, bearing 278° (T), distance 2.5 miles in about 24 to 28 ft. of water. Anchorage for deep drafted ships is with the signal station, bearing 099° (T), distance 3 to 3.5 miles in depths of 38 to 42 ft.
RESTRICTIONS: No entry restrictions. Karwar Bay may be entered on either side of Sunghiri Island, according to draft and anchorage taken as required. A vessel can enter Karwar either by day or night after having made lighthouse on Devghad Island.
MAX. SIZE: Any size of vessel can be worked as loading and unloading operation done in open sea. Depth at Outer Roads over 7 fathoms increasing accordance distance from land.
HEALTH: District Civil Surgeon acts as Port Health Officer. Free pratique to incoming vessels from foreign ports granted by radio. All vessels calling from foreign destination must give radio message addressed "Civil Surgeon Karwar" at least 48 hours prior entering port giving last port of call, number of crew, health conditions, approximate time of arrival and requesting pratique, same message must be repeated to Agents who obtain pratique on shore. Anchoring time is pratique time. For vessels calling from an Indian port, pratique not required.

Vessels which have taken on board passengers or crew from yellow fever areas, within 30 days of departure from such ports will be under quarantine. Free pratique will not be granted until such time as a mosquito search party, from nearest major port (e.g. Cochin, Goa or Bombay) has inspected, disinfected and certified that ship is fit for granting pratique.

Necessary for Owners or Masters to inform Agents well in advance in case of vessel arriving from yellow fever area to enable arrange mosquito search party and quick pratique.

RADIO: ETA and pratique messages should be sent via Goa or Bombay Radio as Karwar Radio has been shut down.
TUGS: No tugs necessary as vessels work in stream.
BERTHING: No berth, vessels work in open sea. Baithkol Cove is safe berthing place for lighters. Alongside wharves 10 to 12 smaller vessels can obtain safe berth with depth of 6 to 8 ft.
STEVEDORES: 48 hours notice ETA required order enable Agents advise shippers and stevedores to keep cargo and labourers ready. Main commodity export of ore. Mechanised barge loading operations in port. Ore loading rate up to 4,000 tons per day. General cargo 1,000/1,300 tons per day.
MEDICAL: Good hospital facilities exist. 2 hospitals about 1.5 miles from port. In case of inoculations and vaccination at least 2 days advance notice to be given enabling bring vaccine from nearby town (Hubli or Belgaum) distance 100 and 150 miles respectively.
TANKERS: No facilities for tankers.
DENSITY: 1025.
FRESH WATER: Dumb Water Barge for supply to steamers anchored in open Roadstead.
FUEL: No bunkering facilities for ocean-going vessels. Diesel and petrol storage depots within port for supply to small vessels.
DEVELOPMENTS: Proposed to develop port of Karwar into all-weather intermediate port, with 2 berths and 1 mechanical berth, an approach channel and turning basin. Intended arrangements include ability accommodate up to 60,000 d.w.t. ore carriers, loading up to 8 million tons ore and 1.25 million tons other cargo per year. Also intended develop fishing harbour with facilities accommodate large-scale deep-sea fishing industry for 1 million tons fish per year.

Provision of Channel Marks:
1 Fairway buoy.
10 channel marking buoys.
Provision of a mooring boat with equipment for maintenance of buoys.
Experimental dredging.
Dredging approach channel and turning basin.
Land acquisition for future expansion.
Diversion of present main road alongside port wharf.
Improvement of Binga/Karwar Road.
Provision of 2 berths and 1 mechanical berth for ocean-going steamers.

OPENING/CLOSING HATCHES: Generally carried out by ship's crew.
CERTIFICATES:
Ship's Register.
Cargo Gear Certificates.
Load Line Certificate.
Safety Radio Certificate.
Safety Equipment Certificate.
Derating Certificate.
Vaccination and Inoculation Certificates.

CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle spirits.
CARGO GEAR: Before commencement of loading, Master to present shippers or their Agents with valid international cargo gear certificate, which shall not be more than 12 months old. Validity of said certificate to cover whole period for loading and discharging. Fourth five-year plan includes proposals for mechanical front-end loaders, tipping trucks, mobile cranes and forklift trucks.

A 10 ton mobile crane is available.

CONSULS: None.
REPAIRS: Moderate-sized workshop in town able carry out minor deck and engine repairs.
REPATRIATION: Shipping Master arranges crew changes and necessary repatriation. Crew signing off repatriated via Goa or Bombay.
AIRPORT: No airport, or rail connections. Nearest airports Goa or Belgaum, 60 and 150 miles distant respectively. 2 flights per day to Bombay from Goa.
TIME: GMT plus 5.5 hours. Permanent.
HOLIDAYS: Charter party holidays declared and published every year by Honorary Secretary of the Karnatak Chamber of Commerce and Industry, Jaya Chamaraj Nagar, Hubli-20.

Non-working days when work not permitted even on payment of overtime: Republic Day (26th January) and Gandhi Jayanti (2nd October).

POLICE/AMBULANCE/FIRE: Circle Police Inspector 116; City Police Station 33; District Superintendent of Police 7; Reserve Police Headquarters 18; Ambulance 19.

GENERAL: Port functions normally from 16th September to 15th May. Port closed from 16th May to 15th September due S.W monsoon.
SHORE LEAVE: Crew members are allowed ashore provided not of Chinese nationality.
AUTHORITY: Office of the Port Officer.

MADRAS: 13.06 N. 80.18 E. (See Plan Book)

PORT LIMITS: The seaward boundaries of the Port:

To the North: A line "NP" running from a point in position "N" Lat. 13° 7.2′ N. Long. 80° 17.95′ E. to a position "P" in Lat. 13° 12′ N. Long. 80° 25′E.

To the South: A line "SQ" running from a point in position "S" Lat. 13° 4.1′ N. Long. 80° 17.25′ E. to a position "Q" in Lat. 13° 2′ N. Long. 80° 25′ E.

To the East: A line "PQ" connecting the Eastern extremities of the above described North and South boundaries, that is from point "P" in Lat. 13° 12′ N. Long. 80° 25′ E. to point "Q" Lat. 13° 2′ N. Long. 80° 25′ E.

DOCUMENTS:
3 Private Property Lists.
3 Stores Lists (Bonded Stores).
3 Crew Lists.
1 Last Port Clearance.
1 Valid Derat Exemption Certificate.
1 Bill of Health (only if vessel has touched yellow fever areas).
3 Slop Chest Declarations.
3 Currency Declaration.
Passenger List (if applicable).
Ship's Papers.
Ship's Register.
Load Line Certificate.
Safety Equipment Certificate.
Safety Radio Certificate.
Ship's articles (if vessel is Indian or Commonwealth flag).
Ship's papers to be handed over to Agent's Representative for final entry of vessel in Customs House. Same returned to Master.

PILOTAGE: Pilotage compulsory, both inward and outward, also for purpose of shifting inside harbour. Master required to advise ETA at least 48 hours before arrival, when local Agents contact Harbour Authorities for arranging berthing. If any berthing delay vessel has to anchor at Outer Anchorage – anchoring point below 10 fathoms line from breakwater light. Vessels requiring Pilot fly "G" flag by day and 1 white light exhibited on a conspicuous point on ship by night.

ANCHORAGE: Good anchorage found with breakwater light bearing between 240° and 300° – distance 1 to 3 miles.

RESTRICTIONS: No restrictions of entry, both day and night navigation. In Jawahar Docks and Bharathi Dock restriction of movement (inward/outward/shifting) during night time from 2200 hrs. to 0600 hrs. Tankers of 50,000 d.w.t. and over are berthed during daylight only. Tankers of 30,000 d.w.t. are berthed and unberthed at Bharathi Dock from 0600 hrs.–2200 hrs.

MAX. SIZE: Max. length South Quay III is 518 ft. (157.88 m.). Max. length Jawahar Dock is 750 ft. (228.59 m.) and breadth 100 ft. (30.48 m.). Max. length of 850 ft. (259.07 m.) for oil tankers using the "Bharathi Dock" is in force for the outer oil dock jetty during the fair weather season from January to October. During the period from October to January in the North-East monsoon period maximum size of vessel is restricted to 750 ft. (228.59 m.) with suitable draft restrictions.

Draft in the enclosed harbour varies from 26 ft. (7.92 m.) to 35 ft. (10.67 m.). Draft at the outer oil berth during fair weather season is 46 ft.

Details may be obtained from the Deputy Port Conservator, Madras Port Trust, Madras – 600001.

Bharathi Dock: Vessels up to 46 ft. (14.02 m.) draft.

HEALTH: All vessels arriving from foreign ports have to apply for pratique through their radio – not earlier than 12 hours and not later than 4 hours before arrival. Pratique message to be addressed "Quarantine Madras" and worded as required by Port Authorities on receipt of which Port Health Officer cables ship granting pratique. In case of any infectious disease on board, Port Health Officer boards vessel and after due inspection grants pratique.

Telegram should take the following form: Name of vessel. ETA, in hours and date. No monkeys on board, last port (ports touched in last 30 days with departure dates). Request radio pratique.

Port health require to sight derat and vaccination certificates when vessel due to leave before issuing clearance for Pilot and Customs who then issue port clearance.

RADIO: Coast Station Madras Radio, call sign VWM. Information regarding weather distributed twice daily. VHF communication available on Channel 16. Pilot station on Channels 10, 12 and 14, open round the clock to transmit and receive berthing and other operational messages.

Radar is installed on the fourth floor of M.P.T. Administrative Office Annexe Buildings.

RADAR/VHF: VHF communication available, see "Radio".

TUGS: Join vessel just inside breakwater. Vessels use own lines and no tugs' lines used/supplied. Tugs' lines are also used if required by Pilot.

BERTHING: Vessels berth at all times except in "Jawahar Docks" where there is no night navigation between 2200 hrs. to 0600 hrs. There are in all 18 general cargo/bulk cargo berths and 3 moorings. Drafts of these berths/moorings vary from 26 ft. (7.92 m.) to 35 ft. (10.67 m.).

There is an exclusive oil berth in the Outer Harbour with a draft of 46 ft.

An iron ore berth with modern mechanical loading facilities is in operation.

The Bharathi Dock has the potential for accommodating 3 more berths 1 of which can be converted into a container berth.

Outer Harbour present draft is 46 ft. (14.02 m.) and it is likely to be increased.

BRIDGES: There are 2 bridges for pedestrian traffic only. 1 swing bridge at the entrance of Jawahar Dock and another Bascule bridge at the entrance of boat basin.

CRANES: Heavy duty floating crane capacity 120 tons available.

STEVEDORES: A copy of Manifest for stevedores' on board required.

Working hours: 1st shift, 0600–1400 (Recess 1100–1200); 2nd shift, 1400–2200 (Recess 1900–1930); 3rd shift, 2200–0600 (Recess 0200–0230).

MEDICAL: Advance notice for medical aid useful if vessel anchored/anchoring outside and not coming alongside, as it takes time to arrange for launch, etc. Medical assistance arranged easily if vessel alongside. Various hospitals and private nursing homes with modern equipment available. All crew members to be in possession of valid health cards in respect of inoculations/vaccinations against smallpox, cholera, etc. Facilities for renewal available.

TANKERS: There is an oil berth with 46 ft. (14.02 m.) draft at the Outer Harbour with 5 unloading/loading arms, 3 for unloading crude and 2 for handling refined products at a rated capacity of 1,500 tonnes per hour per arm. There are 2 moorings with 30 ft. (9.14 m.) draft in the inner harbour for non-dangerous petroleum products.

Manifold is equipped with 300 mm. Quick fixing cam lock coupling.

Facilities for deballasting the oil tanker are provided.

BULK HANDLING FACILITIES: There are 4 berths, 3 in the Jawahar Dock and 1 in South Quay. Handling of iron ore has been discontinued due to the operation of mechanised iron ore plant at the Bharathi Dock. Instead bulk cargo like barytes is handled.

RATE OF DISCHARGE/LOADING: Grains, by hooks/derricks:
Bulk: 300 tons per day per hook.
Bagged: 300 tons per day per hook.
By Vacs: 250 tons per Vac. per day.
Fertiliser. By hooks/derricks.
Bulk: 200 tons per day per hook.
Bagged: 300 tons per day per hook.
General Cargo: 150 tons per day per hook.
Liquid Cargo: About 150 t.p.h.

CRANES: Three 13-tonne cranes available, 3 similar will be available shortly.

DENSITY: Varies from 1019 to 1025 according to season. No variation due to state of tide.

FRESH WATER: Available and can be supplied to vessels either through shore connections or by water barges. During Summer months due to scarcity of water, full requirements of vessel may not be possible.

FUEL: Bunkers available, but supply dependent on stock position. At least 48 hours advance notice required. Suppliers should receive nomination from their Head Office. Companies supplying bunkers are:

The Indian Oil Corporation Limited.
Caltex (India) Limited.
Esso Standard Eastern Inc.
Burmah-Shell Oil Storage and Distributing Company of India Ltd.

Usual rate of bunkering is about 40 to 80 t.p.h. Grades of fuel available:

Fuel oil, 700 Secs. Redwood No. 1 at 100° F.
L.D.O., 70 Secs. Redwood No. 1 at 100° F.
Gas oil, 30/30 Secs. Redwood No. 1 at 100° F.

GANGWAY/DECK WATCHMEN: Services of watchmen are compulsory and they can be engaged from Dock Labour Board.

OPENING/CLOSING OF HATCHES: Work of opening/closing of hatches usually depends on what Charter Party says and also type of hatches of vessel. Liner Term Vessels:-"McGregor Type" – These types of hatches are opened/closed by the crew; but, if Owners/Master desires, rigging gangs may be hired for this work at Owner's expense. Ordinary – Beams & Hatch Boards or Pontoon Type-Opening/closing of this type of hatches is done by stevedores.

CUSTOMS ALLOWANCES: Tobacco. 200 cigarettes and half-ounce tobacco per week can be held by each crew member. Wine/Spirit. 1 open bottle of spirit or wine per week can be held by each crew member.

CARGO GEAR: Vessel should be in possession of valid cargo gear certificate issued by competent authority. Port Dock Safety Inspector may inspect cargo gear before or during loading/discharging in spite of vessel being in possession of a valid certificate.

IDENTIFICATION CARDS: All crew members should be in possession of their respective CDC's/Z. Cards/Passports.

REPAIRS: All types of deck/engine repairs possible. Experienced and established marine workshops available.

DRY DOCKS: None.

CONSULS:

U.S.A.	Tel.	83041	Japan	Tel.	88677
Australia	,,	811393	Netherlands	,,	86411
Britain	,,	86311	France	,,	444203
		and 811376	Belgium	,,	645495
Denmark	,,	22088	U.S.S.R.	,,	73077
Germany	,,	82125	Ceylon	,,	85316

REPATRIATION: All facilities for effecting crew changes and arranging repatriation exist.

AIRPORT: The Madras Airport (Meenambakkam) about 15 miles from harbour and served by regular airlines.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Declared by authorities are observed, but work completely closed on: Pongul, Republic Day, May Day, Independence Day, Mahatma Gandhi's Birthday and Deepavli.

POLICE/AMBULANCE/FIRE: Police 100; Ambulance 101; Fire 101.

TELEPHONES: Can be placed on board, but only on vessels at certain berths. All berths on West Quay, i.e. WQ 1, WQ 2, Centre Berth, WQ 3 and WQ 4, North Quay berth and berths on Jawahar docks (West) only, i.e. JD 1, JD 3 and JD 5.

SERVICES: All special services available.

SHORE LEAVE: Crew members allowed ashore after securing shore passes issued by port security officer. However, they must restrict themselves to city limits.

PORT REGULATIONS: Normal Port Regulations. No photography allowed in harbour except with Chairman of Port Trust's permission.

DELAYS: When there is heavy arrival of bulk grain and fertiliser, vessels may expect a delay of about a week or so. General cargo vessels may expect a delay of about 2/3 days during congestion.

AUTHORITY: Madras Port Trust.

MANDVI: 22.49 N. 69.21 E.

DOCUMENTS: Arrival: Arrival Report with ship's details, Voyage Memorandum, Crew Lists, Stores Lists.

Departure: Departure Report with ship's details, Export General Manifest, Certificate of Cargo Tonnage Loaded.

PILOTAGE: None. All vessels anchor in stream.

RESTRICTIONS: Vessels anchor in open roadstead in 3–5 fathoms, 2–2.5 miles from shore. Vessels of 9 ft. draft can reach wharves at high water and vessels drawing 12 ft. can reach Albert Edward breakwater. Vessels having 60–70 tons cargo only can enter port during high tide. Highest tidal range 14 ft., average range 10 ft. Current 2 knots during fair season.

HEALTH: Government Medical Officer attends as health officer.

RADIO: No radio. All messages delivered through Kandla.

TUGS: Services optional 3 tugs and 1 launch. Charges basis time and BHP.

STEVEDORING: Arranged by Agent with Port Authority.

MEDICAL: 24 hours notice required of any medical requirements.

FIRE PRECAUTIONS: Fire extinguishers are available at the port. Fire fighter is available at the Port workshops. Smoking strictly prohibited in port area.

WATCHMEN: Arranged through Agents.

HATCHES: Opened and closed by crew.

CERTIFICATES: Non-carriage of dangerous cargo, Cargo Gear Certificates, Statement that no passengers carried.

CUSTOMS ALLOWANCES: No restrictions for crew of coastal vessels. Stocks of tobacco, wine and spirits to be declared to Customs. Wines and spirits prohibited in Gujarat States but Master permitted daily quota by Customs Authorities.

REPATRIATION: No facilities.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Usually possible to arrange work on holidays.

POLICE/AMBULANCE/FIRE: Police 8; Ambulance 32; Fire 10.

GENERAL: Gulf of Kutch Ports, viz. Mandvi, Mundra, Jakhau and Koteswar administered by Director of Ports, Gujarat States, Ahmedabad. Mandvi located on Southern coast Gulf of Kutch at mouth of river Bukmavati, seasonable, tidal and intermediate ports.

SHORE LEAVE: Crew of coastal vessels only allowed ashore subject prior permission from Captain of the Port.

DELAYS: Delays to be expected in supply of cargo at times of lowest water.

AUTHORITY: Deputy Engineer & Port Officer.

MANGALORE (Minor Port): 12.55 N. 74.52 E.

PORT LIMITS:

North: A line drawn due West from the Northern boundary pillar on the seashore about 740 yards from Sultan's Battery to 9 fathoms of water.

South: The line drawn due West from the Southern boundary pillar to the seashore, about 1,000 yards below the marine yard to 9 fathoms of water.

West: The 9 fathom line between its intersections with the lines above defined as the Northern and Southern limits.

DOCUMENTS:

Crew Lists (6 copies).

Crew's declarations for Customs (4 copies).

Store Lists (4 copies).

Currency declaration (2 copies).

Import Manifest inclusive of Deck Cargo and bottom cargo (3 copies).

Bill of Lading (1 copy).

Ships particulars inclusive of service stand (2 copies).

Declaration of opium, dangerous drugs, gold, arms, ammunitions and explosives, monkeys on board, last and next port of call (2 copies).

Arrival report and Port and Light dues receipts (2 copies).

PILOTAGE: No pilotage. Open anchorage port. When shifting to nearest safe anchorage, free pilotage assistance rendered by Port Officer.

ANCHORAGES: Vessels anchor in depths of 4.5 to 6 fathoms with Mangalore Lighthouse (12° 50.8′ N., 74° 50.3′ E.) bearing between 250° and 270° (T).

HEALTH: Vessel arriving from foreign country sends radio message in code or otherwise to respective Agents who contact Port Health Officer accordingly. If vessel from yellow fever area Master should give prior notice to Agent to arrange for Mosquito Party from Cochin to come to Mangalore and board ship on arrival. If suspected or infected, vessel should anchor not less than half a mile from all other vessels and notify Port Authorities of situation either by radio or through signal station.

RADIO: Call sign VWL on 500 kc/s and 438 kc/s working frequency.

STEVEDORES: Stevedores available. Average loading/ discharging rates per day:

(*a*) Iron ore 400 tons per hook (weather permitting).

(*b*) Fertiliser or wheat bags 200 tons per hook (weather permitting).

(*c*) General cargo bagged 200 tons per hook (weather permitting).

TUGS: 1 Port Trust tug and two launches and 2 private tugs capable of towing over 600 tons each are available.

MEDICAL: 24 hours notice necessary to arrange for a doctor on board. Goverment Hospital and Nursing Homes available.

DENSITY: Density of 1022/3 throughout year except in September (immediately after Monsoon at beginning of shipping season) when density about 1016.

FRESH WATER: Supplied by water barge at rate of 110 tons per trip with 48 hours prior notice. Cost of supply inclusive of all charges except crew overtime on holidays. Minimum order 35 tons.

FUEL: Small quantities not exceeding 40 tons of diesel oil can be supplied by oil barge.

GANGWAY/DECK WATCHMEN: Available.

OPENING/CLOSING HATCHES: As per terms and conditions of Charter-Party.

CERTIFICATES:

Ship's Registry.

Deratisation Certificate.

Articles of Agreement.

Dock Safety Register (cargo gear).

Radio Telegraphy Certificate.

Load Line Certificate.

Port Clearance from last port.

Bill of Health.

Safety Equipment Certificate.

CUSTOMS ALLOWANCES: Tobacco. 200 cigarettes per week. Wine and spirits, 1 open bottle of spirits per week.

CARGO GEAR: Derricks and boat devices to be hoisted in when not required to prevent contact with masts and sailyards of lighters alongside. Advisable that lifeboats be lowered only on non-working side.

IDENTIFICATION CARDS: Passport or identification cards to be carried by crew plus letter of permission from Master for shore leave.

CONSULS: None.

REPAIRS: Minor repairs to engines and gear carried out by auto-workshops.

DRY DOCKS: Small dry dock, maximum capacity 450 d.w.t. Dimensions, 110 ft.×30 ft. Depth on sill 8 ft. at MHWS. For repairs only.

REPATRIATION: Can be arranged by ship's agents or at shipping office.

AIRPORT: Airport situated 12 miles away. Daily flights to Bombay. Tuesday, Thursday, Saturday to Bangalore. Services by Indian Airlines Corporation.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Observed as declared by Port Authorities. Work can be arranged on all holidays except principal Muslim festival days.

POLICE/AMBULANCE/FIRE: Port Police Station 5196. Fire service on lighter wharf only (no fire-floats available), tel. 3333.

TELEPHONE: No arrangement for placing telephone on board.

GENERAL: Port open only in fair season from 15th September to 15th May. However, ships may call at port and work between 15th May and 15th September (weather permitting) with prior permission of Port Officer.

SHORE LEAVE: Permitted, except for Pakistan and Communist-Chinese crew.

DELAYS: Adverse bar conditions necessitate stopping work for bad weather.

AUTHORITY: Mangalore Port Trust Board.

MORMUGAO: 15.25 N. 73.47 E. (See Plan Book)

PORT LIMITS: Roughly up to 10 fathom line running North and South from Cabo to Grand Island. Vessel is considered "arrived vessel" when she comes under direction of Signal Station.

DOCUMENTS:

10 Crew Lists.
10 Passenger Lists, if any.
3 Copies of Manifest.
1 Last Port Clearance.
1 Bill of Lading in case of imports.
3 Stores Lists.
3 Personal Property Lists.
1 Letter of Authority to Agents addressed to Asst. Collector of Customs (prepared on arrival).
1 Arrival Report to Immigration Officer.
1 Customs Declaration.
1 Inward Clearance Certificate.
1 List of Particulars.
1 Deck Cargo Certificate.
1 Arrival Report.

Last 7 items to be signed by Master in port after arrival.

Ship's papers: Documents placed at disposal of port:

Ship's Registry.
Deratisation Classification.
Safety Equipment.
Load Line.
Radio Telegraphy.
Indian Light Dues.
Annual Cargo Gear Certificate.
Safety Construction Certificate.

PILOTAGE: Compulsory. ETA required at least 24 hours before arrival to order Pilot. Call Pilot by international code signals on arrival at signal station or contact by VHF Channel 16.

Pilot launch is white launch showing Pilot flag. In fair weather Pilots board West of fairway buoys. In bad weather, Pilots guide vessel from launch until boarding possible. Pilot launch leaves from inner harbour with Pilot and is not stationed at any particular position. International regulations for Pilots' ladders applicable. Vessels awaiting Pilot may anchor 2 miles West of fairway buoy 6.

RESTRICTIONS: Pilotage only during daylight hours. Draft restricted. Deep-laden vessels await high tide. Max. draft permissible 28 ft. to 30 ft. Draft particulars for incoming ships berth No. 3, 4, 5 and 6 – 23 ft., 27 ft., 27 ft. and 27 ft. Max. draft outgoing ships: berth No. 3, 4, 5 and 6: 23 ft., 27 ft., 27 ft. and 27 ft., respectively. Masters of outgoing vessels wishing to load beyond allocated drafts required to obtain permission 24 hours before sailing/shifting and must sail at fixed time.

MAX. SIZE: Length 650 ft., also see "Entry Restrictions". Vessels loading West of breakwater in fair weather: no restrictions on size or draft. Tankers max. length 700 ft. Also see "Developments".

HEALTH: International Regulations apply. Pratique automatic when calling from another Indian port. Pratique granted by Pilot Officer who boards vessel on arrival. Telegraphic pratique can also be obtained from Port Health Officer cable address "Quarantine Mormugao".

Master should send quarantine message not less than 4 and not more than 12 hours prior arrival indicating:

(1) Name of ship.
(2) Expected date and time of arrival.
(3) My Maritime Declaration of Health has negative answers to all 6 Health Questions or ZT or My Maritime Declaration of Health has a positive answer to question (indicated by complements) or ZU (indicated by complements 1–6).
(4) List of ports of call with dates of departure during last 30 days.
(5) Have or have not monkey on board.
(6) Have or have not any person on board embarking at Aden, Djibouti or Yemen.

Request radio pratique.

RADIO: Goa Radio, call sign VWG. Operating continuously on 500 kHz, 417 kHz, and 2182 kHz. Communication range 100 miles.

VHF radio telephone station at signal station headland, call sign Goa Port, calling Channel 16, working Channel 12.

Ships desiring to contact port on VHF should establish contact by means of *(a)* light signals, *(b)* hoisting "Z" flag, *(c)* blowing "Z" on whistle or siren.

Port VHF station attracts attention of desired ship by hoisting "Z" flag with call letters of ship or by light signalling.

VHF service restricted for port operation, ship's emergencies and movements. All messages to be addressed to Harbour Master. Third party communication not allowed.

TUGS: Tugs usually used inside breakwater. Normally push, but when towing, use ship's lines.

BERTHING: Deep loaded incoming vessels berthed 2 hours before high water. Vessel also use anchor and quarter line to mooring buoy to keep off berth.

BULK HANDLING FACILITIES: One berth equipped for mechanical handling of iron ore. Loading rate about 750 t.p.h. At present vessels of 30,000 d.w.t. and draft of 27 ft. can be accommodated.

The current development project includes provision of iron-ore berth capable of handling vessels of up to 60,000 d.w.t. initially, and 100,000 d.w.t. ultimately with ore-loading plant capacity 8,000 t.p.h.

STEVEDORES: Original ETA of 48 hours and a definite ETA of 24 hours required and Master should indicate stowage and gangs required before arrival, also how derrick booms must be arranged so as to enable stevedores to arrange same on arrival.

MEDICAL: No hospital facilities for any serious sickness but facilities available for first aid, which should be informed 24 hours in advance. Port Ambulance can be obtained during day-time only.

TANKERS: Discharge line 14 in. No loading facilities. Permissible draft 28 ft. at Oil Berth No. 8. In addition, discharge facilities are available at Berths Nos. 4, 5 and 6 with 27 ft. draft.

DENSITY: Salt water 1025 – slightly fresh during monsoon season.

FRESH WATER: Available alongside berths also from 180 tons capacity barge. Pumped by hose at 20 t.p.h. at berth, and 30 t.p.h. from barge. Sometimes restricted to 50 tons maximum if supply is limited.

FUEL:

Grades	*Viscosities*
High speed diesel oil	Less than 45 Redwood
Light diesel oil	41 ,,
Furnace oil (also known as light fuel oil)	of 623 ,,

48 hours advance notice required.

FIRE PRECAUTIONS: During discharge of oil tanker, great care taken that no naked lights are visible nearby. Movements of unauthorised persons at point of discharge strictly restricted. Ships alongside or up to a distance of 100 ft. are advised not to emit smoke through funnel. Round the clock standby duty carried out by Fire Service, around tanker, till completion of cargo discharge.

DEVELOPMENTS: Under the port development scheme the following points are included:

Dredging harbour to 45 ft. with an alongside depth of 43 ft. at new berths to be provided.

Construction of new ore-handling complex for up to 100,000 d.w.t. vessels.

Construction of new deep drafted oil berth which has already been commissioned.

GANGWAY/DECK WATCHMEN: Necessary to have watchmen in case of loading general cargo to protect goods. In case of loading iron ore no watchman required.

OPENING/CLOSING HATCHES: Usually by crew, unless contrary to Charter Party.

CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes per crew member per week. Wine and/or Spirit: 4/5ths of bottle per week for each member of European crew. 2/5ths of bottle per week for each member of Asian crew as per practice.

IDENTIFICATION CARDS: Not essential but according to Immigration Rule temporary Police landing pass issued to each Crew member going on shore, valid for municipal area of Vasco town; if valid passport is possessed.

REPAIRS: No major repairs. Minor repairs only and no underwater welding facilities.

DRY DOCKS: None.

REPATRIATION: Facilities exist for changing and repatriating crew.

AIRPORT: Approx. 7 kms. from harbour. One local flight daily to Bombay. No international flights from Goa and all outgoing foreign passengers have to be repatriated via Bombay.

CARGO GEAR: Certificates to be valid.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Republic Day; Mahashivratri; Holi; Gudi Padva Muharam; Good Friday; Independence Day; Ganesh Chaturthi; Mahatma Gandhi's Birthday; Dussehra; Feast of St. Francis Xaviour; Idu'l Fitr; Goa Liberation Day and Christmas Day.

POLICE/AMBULANCE/FIRE: Police 2234 through Postal Exchange; Ambulance (Health Centre) 2454 through Postal Exchange; Fire 222 or 223 through Port Exchange and 2300 through Postal Exchange.

TELEPHONES: No arrangements for installation of telephones on board.

SHORE LEAVE: Crew members allowed to go on shore with Police landing pass.

AUTHORITY: Mormugao Port Trust.

MUNDRA: 22.54 N. 69.42 E.

LOCATION: In Gulf of Kutch near Navimal Lighthouse, about 2 miles inside Bocha Creek. Port is about 6 miles West of Mundra town. Salt exporting port open for deep sea and coastal traffic. Vessels calling Mundra anchor in open roadstead 2 miles from shore. Vessels of 8 ft. draft can berth alongside jetty. Highest tidal range 17 ft. Current parallel to coastline running about 3 knots.

AUTHORITY: Assistant Conservator.

NAGAPATTINAM: 10.45 N. 79.50 E. (See Plan Book)

DOCUMENTS: To be completed by Masters of vessels on arrival:

8 Crew Lists.
8 Passenger Lists.
3 Form of Import Manifests of Stores.
3 Lists of articles in slop chest.
3 Private Property. Declaration of the Crew.
3 Manifests.
3 Bills of Lading.

To be handed to Agents:
- Ship's Register.
- Load Line Certificate.
- Safety Equipment Certificate.
- Safety Construction Certificate.
- Safety Radio Certificate.
- Last Port Bill of Health.
- Last Port Clearance.

PILOTAGE: No Pilot station, being open roadstead port. Vessels not piloted to anchorage.

ANCHORAGE: Vessels anchor according draft and prevailing weather conditions. In fine weather, good anchorage in depths of 3.75 to 6 fathoms with lighthouse bearing 281° to 255°. Holding ground, sand and mud, good. Agents, in consultation with Port Authorities, signal Master on arrival of vessel, anchorage position for guidance.

MAX. SIZE: No restrictions. Vessels choose anchorage according to draft.

HEALTH: On arrival Master to signal local signal station, addressed Port Health Officer stating vessel arrived and no sick person on board. Agents then obtain free pratique from Port Health Authorities. In event any person having chicken-pox or smallpox on board, advisable that Master informs Agents sufficiently in advance to enable them make necessary arrangements for Port Health Officer to board vessel on arrival and obtain free pratique after Port Health Officer is satisfied that isolation arrangement on board adequate.

RADIO: Madras Radio or Colombo Radio. No radio station locally.

TUGS: 2 tugs of 45 h.p. each and a motor launch of 30 h.p. are available for towing lighters.

BERTHING: Open roadstead port. No berths. A mobile crane of 4 tons capacity is available in the port for handling heavy cargoes.

STEVEDORES: Port usually handles fertiliser imported on Government of India account and rate of discharge per day about 750 to 1,200 tons. Advisable that ETA of vessel is passed to Agents at least 2 days in advance to enable them to advise receivers to arrange necessary gangs.

MEDICAL: No advance notice required unless sickness of serious nature when Medical Officer boards vessel on arrival. In case of sickness to officers or crew, Medical Officer boards vessel or if in condition to go ashore, necessary arrangements made to take sick crew to Doctor. District Headquarters Hospital with all medical facilities available. Special wards available for sick members of crew. Vaccination, inoculation against yellow fever, cholera, plague, etc., can be arranged.

DENSITY: 1025.

FRESH WATER: Available in limited quantities and dependent upon port getting continuous supply from municipality. 2 tanks of 14.5 tons capacity placed in lighter are sent alongside vessel and a petrol-driven pump is used to pump up water from tanks into vessel.

FUEL: Diesel oil available in a limited quantity.

GANGWAY/DECK WATCHMEN: In the interest of vessel, 2 gangway and deck watchmen daytime and at night to be employed to avoid pilferage.

OPENING/CLOSING HATCHES: Opening and closing of hatches on arrival of vessel before commencement of discharge and on completion carried out by stevedores. Time used for opening and closing of hatches not counted.

CUSTOMS ALLOWANCES: Tobacco, 1 carton per week per crew member. Wine and Spirit, Whisky or brandy 1 quart each member for a week. No restriction for beer as the issue is based on weather, etc. This rule relaxed if necessary.

IDENTIFICATION CARDS: Needed.

CONSULS: None.

REPAIRS: Minor repairs in engine room and on deck can be effected. Chipping and painting can also be arranged.

DRY DOCKS: None.

REPATRIATION: Facilities available for effecting crew changes and arrangements can be made for repatriation.

AIRPORT: Nearest airport Madras, served by regular airlines.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Observed as declared by Authorities. Vessels work on Charter Party and Government holidays but time not counted. No closed holidays but overtime charged for any work done on Government holidays and on Sundays.

POLICE/AMBULANCE/FIRE: Police 267; Ambulance 299; Fire 299. The Police and Customs Departments maintain their own W/T stations which can be contacted or utilized at times of emergency.

GENERAL: No regular launch service between ship and shore. Agents hire out private launch and obtain permission from port office to ply launch between ship and shore, to facilitate officers and crew to go ashore and for Doctor, Agent and Port Health Officer. Port Authorities do not permit plying of launch after 1800 hrs. 3 trips arranged for launch to go to vessel and back from 0600 to 1800 hrs. every day weather permitting.

SERVICES: Hatch cleaning after discharge of cargo can be carried out.

SHORE LEAVE: Officers and members of crew allowed to go ashore and necessary passes obtained by Agents.

DELAYS: Usually no delay in anchoring vessels and generally all formalities including survey carried out on vessel's arrival. If vessel arrives between 0600 and 1400 hrs., she commences discharge same day.

AUTHORITY: Port Officer.

NAVLAKHI: 22.57 N. 70.27 E.

DOCUMENTS: Arrival:
- Last Port Clearance.
- Bill of Health/Maritime Declaration of Health.
- Customs Arrival Report.
- Port Arrival Report.
- Agent's Arrival Report.
- List of Same Bottom Cargo.
- Crew List (6 copies).
- Import General Manifest.
- Lighthouse Dues Receipt (in case the last port of call being Indian port).
- Store List & Private Property List (8 copies each).
- Misc. Declaration.

Departure:
- Port Clearance (handed over by Customs).
- Bill of Health.
- Port Departure Report.
- Agent's Departure Report.
- Income Tax Clearance Certificate (in case of export cargo).

PILOTAGE: Not compulsory. If required an experienced local guide provided by Port Authorities. In such cases Pilot meets vessel at Tuna Buoy Pilot station about 19.5 miles from port.

ANCHORAGE: Open roadstead port. Vessels work in stream. 2 vessels can be brought to inner anchorage and work conveniently. In case a third vessel arrives, it has to anchor at Buoy No. 5 until 1 of the vessels sails from inner anchorage. During non-monsoon times vessels can be moored at Buoy (Navlakhi) No. 5. Chart of the approaches is No. 2017.

RESTRICTIONS: Night navigation risky. Generally vessels' movements during daytime high water period. Vessels should arrive Tuna Buoy 3 hours before high water in daytime.

HEALTH: No Port Health Officer available. Customary for Port Health Officer Kandla to board vessel at Tuna buoy and grant free pratique (in case vessel within 30 days called any other restricted ports). Otherwise Customs Officer grants free pratique after vessel's arrival in port limits.

RADIO: Radio messages intended for this port should be addressed either through Kandla or Bombay Radio Stations.

TUGS: Four tugs available, 150 h.p., 370 h.p., 382 h.p., and 240 h.p.

CARGO HANDLING: Ships lie at anchor in the stream about 2.5 km. from shore and cargo is shipped/landed through lighters. There are 17 barges of 100 tons capacity each. There are godowns of 234,000 sq. ft. floor area to store the cargo passing through ports. There are four 3 tonnes capacity cranes and two of 5 tonnes capacity.

STEVEDORES: At least 24 hours notice to arrange gangs. Rate of loading and discharging for grain and fertiliser about 900 tons a day if 1 ship working; in case 2 vessels working simultaneously, average of about 600 tons can be maintained in fair weather days.

MEDICAL: No facilities available. Small dispensary under control of Medical Practitioner who undertakes emergency cases. Good medical facilities available at Morvi which is 30 miles away, or Rajkot about 60 miles. Generally doctor called from Morvi to attend vessels.

DENSITY: 1025.

FRESH WATER: Supplied only in small quantities. 1 barge with carrying capacity of about 50 tons a trip. Due to very low pressure pipe-lines, minimum 12 hours to fill barge.

FUEL: None available.

DEVELOPMENTS: A new lighter-wharf in Sui-Side creek is under consideration so as to work lighters all round the clock.

GANGWAY/DECK WATCHMEN: Necessary to appoint watchmen on board to avoid possible thefts.

OPENING/CLOSING HATCHES: Depends upon terms of working. Local stevedores generally attend to this operation but charge to vessel (Owners) in case these operations are vessel's account.

CERTIFICATES:
- Load Line Certificate.
- Safety Equipment Certificate.
- Safety Radio Certificate.
- Ship's Register.
- Derating Certificate.

IDENTIFICATION CARDS: Customs examine and issue pass to land. But if crew go to suburbs (beyond Morvi which is 30 miles away), identity cards should be carried.

CONSULS: None.

REPAIRS: Workshop for repairs to port equipment and urgent repairs of minor nature can be carried out.

DRY DOCKS: None.

REPATRIATION: Crew being repatriated from this port would be sent to Kandla (after Customs examination) where facilities are available.

AIRPORT: Navlakhi not connected by air. In case of emergency, Kandla or Rajkot nearest airports.

TIME: GMT plus 5.5 hours.

HOLIDAYS: The port holidays are taken as Charter Party Holidays. Except for some restricted holidays, work will be carried out on payment of overtime.

POLICE/AMBULANCE/FIRE: Checkpost Police Station without telephone.

TELEPHONES: Few important offices are connected with telephones, and no telephone service can be provided on board vessel.

SHORE LEAVE: The crew members are allowed ashore. See "Identification Cards".

AUTHORITY: Port Officer.

NEW MANGALORE: 12.57 N. 74.48 E. (See Plan Book)

LOCATION: New Mangalore port is situated at 9 km. North of the existing minor port of Mangalore.

PILOTAGE: Compulsory.

ANCHORAGE: Vessels are advised to anchor in a depth of 10 m. (33 ft.) in a position with Surathkal lighthouse, flashing 10 seconds, bearing 011° (T) distance from lighthouse 4.3 miles. Entry into the channel with Pilot is made with 2 transit towers.

NAVIGATION AIDS: Include fairway buoy, front and rear leading lights and channel marking buoys.

APPROACHES: The port has been created by carving out of the mainland a 260-acre lagoon 10.1 m. deep. The lagoon is connected to the sea by an approach channel, 3,200 m. long protected by 2 breakwaters each 340 m. long, constructed one on either side of the channel.

BERTHING: New Mangalore port provides for three alongside berths to cater to (1) general cargo, (2) iron ore and manganese ore, (3) raw materials import for fertiliser factory, (4) one shallow draft berth for export of finished fertilisers and, (5) an oil jetty for handling of naphtha and petroleum products. The dredged depth available at the alongside berths including oil jetty is 9.75 metres, the shallow draft berth has a draft of 6.15 m.

The port has been well provided with storage facilities and cargo handling equipments such as floating crane, electric level luffing cranes, mobile cranes, pay loaders, tractor trailer unit etc., all of varying capacities.

TANKERS: The oil jetty is located in the S.W. portion of the lagoon very near to the approach channel. The dredged depth at the oil jetty site during the first phase of construction will be R.L.-9.75 m. During high tide, the depth will be R.L.-10.65 m. affording berthing facilities for 30,000 d.w.t. tankers.

FRESH WATER: Available.

FUEL: Available.

REPAIRS: Well equipped workshop.

COMMUNICATIONS: Port is connected by a broad gauge railway line to Madras via Shornur and National Highway 17, connecting Bombay to Cape Comorin passes by the side of the new port.

DEVELOPMENTS: Provision for procurement of 22.5 ton bollard pull tug and construction of a slipway have been made in the 5th Five Year Plan. The second stage development of the port for providing port facilities to export iron ore concentrates from Kudremukh region through New Mangalore port has been taken up for execution and is in progress.

The Kudremukh Iron Ore Project envisages transporting of the beneficiated ore in slurry form from the mine head to the filtration plant near the harbour, converting the same into filter cakes and stacking in a covered stock pile in the port area. The concentrates are then loaded into the bulk carriers by means of mechanical loading comprising of ship loaders, reclaimers and stackers. After completion of the project the port will be exporting annually about 7.5 million tonnes of iron ore concentrates to Iran for a period of 20 years.

In order to develop the existing New Mangalore port to cater to the needs of receiving 60,000 d.w.t. ore carriers for export of these iron ore concentrates, the following developmental works are being taken up in the port.

1. Construction of an iron ore berth.
2. Deepening the lagoon, inner and outer approach channel −13.0 m. and −13.5 m. respectively.
3. Protection of entrance channel by extending the breakwaters on either side from −3.66 m. contour to −5.00 m. contour.
4. Additional navigational aids including aids for night navigation.
5. Additional harbour crafts for berthing and unberthing of bulk ore carriers.
6. Bunkering facilities for ore carriers.
7. Electrical installations, water supply connections, etc., etc. and
8. Extension of roads, drainage and other facilities to the ore berth.

AUTHORITY: The Administrator, New Mangalore port.

OKHA: 22.28 N. 69.05 E.

DOCUMENTS: 5 copies each of Import Manifest, Crew List. Passenger List, Ship's Stores Manifest, Crew Property List.

PILOTAGE: Compulsory. Pilot station Lat. 22° 30.5′ N.; Long. 69° 04.6′ E.; 1.35 miles N.W. of Samiani Light Tower.

ANCHORAGE: Roadstead anchorage near Pilot station.

MAX. SIZE: 525 ft. LOA during N.E. monsoon and 540 ft. LOA during S.W. monsoon. Max. draft 25 ft.

PRATIQUE: The Master should cable the Port Health Officer (Quarantine Okha) in International Health Code, requesting free pratique. If radio pratique is not effected, then Masters should present Maritime Declaration to the Customs Boarding Officer who is authorised to grant free pratique. If the vessel is arriving from yellow-fever area, the mosquito control team is arranged from Kandla, where the cable address of the Port Health Officer is "Sangrodh Kandla".

RADIO: Post and Telegraph Department Wireless station call sign VWO can be contacted from 0800 to 2000 hrs. I.S.T. for communication to and from Local Agents.

TUGS: Port-owned tugs join vessel while entering port channel and/or vacating it at time of berthing and/or unberthing.

BERTHING: Only daylight hours. Vessels should be ready in all respects to move to berth 1.5 hours before high water at Pilot station.

Sayaji Pier – East side 25 ft. draft; West side 20 ft. draft.
Dry cargo berth – 23 ft. draft.

CRANES: Vessels use own derricks for heavy lifts. There are 2 electric cranes at the Dry Cargo berth each 1.5 – 2.0 tons capacity.

BRIDGES: None.

STEVEDORES: Firm ETA including requirements order avoid delay. *(a) Exports:* Mainly cement, bauxite and chemicals and general merchandise, rate 100/125 tons per shift per hook. *(b) Imports:* Mineral oils average rate about 200 to 300 t.p.h. according to ship's pumping capacity; general cargo same rate as export.

MEDICAL: Port Health Officer always available. Well-equipped hospital at Mithapur under Tata Chemicals at a distance of about 7 miles from port. Medical aid available throughout day and night.

TANKERS: All dry cargo vessels regulations apply for tankers, particularly size, etc. 1 berth, draft 25 ft. No slop facilities.

DENSITY: 1025.

FRESH WATER: Limited. Port supplying water by barge and shore pipe-line. In normal cases 25 tons water supplied per day. In cases of emergency 40 tons water can be supplied per day.

FUEL: Available but arrangement should be made through oil companies head offices at Bombay.

FIRE PRECAUTIONS: Port Department maintains a small fire station.

GANGWAY/DECK WATCHMEN: Vessel to provide own gangway watchmen. Shore-watchman available for employment on shift basis (8 hour shifts).

OPENING/CLOSING HATCHES: To be attended to by ship's crew, if not contracted with stevedores which may cost extra.

CERTIFICATES: Ship's Register, Load Line Certificate, Safety Equipment, Safety Gear, Radio.

CUSTOMS ALLOWANCES: At Customs Preventive Squad's discretion.

CARGO GEAR: Normal gear supplied by stevedores for hire.

IDENTIFICATION CARDS: Necessary.

CONSULS: None.

REPAIRS: Only minor repairs.

DRY DOCKS: None.

REPATRIATION: Necessary formalities to be completed at District Headquarters situated at Jamnagar, a distance of about 110 miles: such as Police, Health, (whereas Customs formality can be completed locally).

AIRPORT: Nearest airport Jamnagar about 110 miles connected with Okha by rail and road. Only local service to Bombay daily operated.

TIME: GMT plus 5.5 hours. (I.S.T.)

HOLIDAYS: As declared by Port Authorities, cargo work can be arranged by paying usual scheduled overtime but labour's observed holidays (about 5 to 6 days in a year) completely closed.

TELEPHONES: Only for tankers by respective oil installation.

GENERAL: Port governed by Gujarat State and all rules and regulations laid down by them in addition to Central Government rules applicable to this port. Port connected with hinterland by rail, motor transport, 300 miles by sea from Bombay, 2 tides in 24 hours, mean high water spring rise about 11.5 ft. and mean low water neap rise 9.5 ft.; current in neap tide is 2 to 3.5 knots. Wind force/direction during April/September S.W. 3/5 and in October/March N.W. to N.E. from 2/4.

SERVICE: Tank cleaning by manual labour.

SHORE LEAVE: Crew allowed ashore after vessel cleared by immigration officer who boards vessel on arrival.

DELAYS: Delay only encountered if berth or moorings are occupied.

AUTHORITY: Port Officer, and Superintendent of Customs, Okha (Ahmedabad Collectorate).

PARADIP: 20.14 N. 86.42 E. (See Plan Book)

PORT LIMITS: 10-fathom line in Bay of Bengal.

DOCUMENTS:
"No opium" Certificate.
Deck Cargo Certificate.
Arrival and departure reports.
Anchorage Certificate.
6 copies of Crew Lists.
Manifest or Bills of Lading.

PILOTAGE: Pilotage available during daytime only. Last pilotage 1630 hrs. Give ETA to Agents at least 24 hours in advance. Agents book Pilot and arrange for inward pilotage after arrival.

ANCHORAGE: Anchorage particulars given in chart published as "Paradip Anchorage". Vessel can anchor depending on draft, 4 cables from Fairway Buoy, positioned Lat. 20° 14.51′ N. and Long. 86° 42.19′ E. Pilot boards during daytime with help of Pilot launch.

RESTRICTIONS: Vessels not berthed/sailed during night-time after 1630 hrs. Vessels to have maximum ballast for entering.

MAX. SIZE: LOA 850 ft. and max. draft 39 ft. Also see "Berthing".

Subject to weather conditions longer vessels may be berthed. A vessel of 840 ft. has been berthed, also vessels with 39 ft. draft.

HEALTH: Send usual quarantine message to "Quarantine Paradipport" 24 hours before arrival for radio pratique. Pilot gives free pratique on boarding vessel subject to no sick person on board. In case of suspected disease or fever on board, Port Medical Officer visits ship at anchorage/berth and cases of contagious disease are isolated and sent to nursing home.

RADIO: VHF radio installed at signal station in the Harbour Office. Calling Channel 16. Working Channel 9.

Working Hours: every even hour for 10 minutes from 0600 hrs. to 2200 hrs. and when ships are making or leaving the port.

VHF: Vessels are requested to establish contact with the control station when within VHF range (approx. 40 to 60 miles) and before entering, moving in or sailing from the port.

When within VHF range, ships are requested to give the following information:

(1) Name of ship.
(2) Ports of departure, call and destination.
(3) ETA.
(4) Vessels gross tonnage, LOA, breadth, draft and speed.
(5) Number of cases of dangerous contagious diseases on board.
(6) Type and quantity of cargo.
(7) Name of Agents and requirements.

TUGS: Tugs join vessel just inside approach channel. Ship's lines only used.

BERTHING: 1 iron ore berth, 1 general cargo berth and 1 mooring berth.

Iron-ore Berth: Overall length 320.5 m., draft 11.89 m., beam unrestricted. Accepts vessels up to 80,000 d.w.t.

General Cargo Berth: Length 290 m., draft 10.69 m.

Mooring Buoy Berth: Vessels up to 850 ft. with draft 39 ft. can be moored.

CRANES:

Types of crane	*Nos.*	*Capacity*
E.L. wharf cranes	3	13 T
Mobile cranes	8	7 to 20 tonnes each

Cargo Handling Equipment:

Fork lift trucks	10	3 T
Front end loaders	2	2.3 cu.m.
Rear dumpers	7	4.5 cu.m.
Tractor trailers	4	5 T
Tractor trailers	1	10 T
Tractor trailers	1	20 T

BULK HANDLING FACILITIES: 1 iron ore berth with mechanical loading plants of rated capacity 2,500 t.p.h.

SPECIALISED CARGO HANDLING FACILITIES: At present no facilities available for container, roll-on/roll-off traffic or liquid chemicals.

STEVEDORES: Stevedores required for loading/unloading at General Cargo Berth and Mooring Berth and at Iron Ore Berth when there is no Iron-ore vessel at the Port. Average loading rates achieved for different cargoes as follows:

Cargo	*Tons per day*
Chrome-ore	1,200
Pig-iron	1,500
Coal	3,000
Iron & Steel	1,000
Foodgrains	1,500
Fertilisers	750
Other General Cargo	750

TANKERS: No facilities available at present.

MEDICAL: After arrival, Doctor can board vessel to attend to any urgent case. No hospital facilities. Sick crew sent to Cuttack/Bhubaneshwar about 90/120 km. from Paradip.

DENSITY: Varies from 1018 to 1024 with average of 1021.

FRESH WATER: Water supplied both at iron ore berth, Quay berth and also at moorings but not at roads. Water supplied at an average of 100 tons per day.

FUEL: HSD and furnace oil can only be procured from Cuttack on duty paid oils only. Arrangements will have to be made well in advance and the port will only provide berthing facilities for taking bunkers.

FIRE PRECAUTIONS: Fire extinguishers available.

GANGWAY/DECK WATCHMEN: Necessary.

OPENING/CLOSING HATCHES: Undertaken by crew only.

CERTIFICATES:

Ship's Register.
Load Line Certificate.
Safety Radio Certificate.
Safety Equipment Certificate.
Last Port of Clearance.
Deratisation Certificate.

CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes per head per week. Wine and/or Spirit: 1 bottle of 24 ounces per head per week.

CARGO GEAR: Valid cargo gear certificate required.

IDENTIFICATION CARDS: Authorities issue landing pass.

CONSULS: None.

REPAIRS: Minor repair facilities exist.

DRY DOCKS: A 500-ton slipway available.

REPATRIATION: Repatriation of foreign personnel is strictly not allowed as Paradip has not been declared a port of embarkation and disembarkation. Only emergency cases considered provided sufficient time is given, for permission from the Home Secretary of local Government from Bhubaneshwar and other immigration authorities.

AIRPORT: Nearest airport at Bhubaneshwar 120 km. Only local flights available. Flight timings to Visakhapatnam 1100 hrs. and Calcutta at 1500 hrs. and 1925 hrs. daily.

TIME: Local time GMT plus 5.5 hours.

HOLIDAYS: Charter Party holidays. Normally work carried out on all days.

POLICE/AMBULANCE/FIRE: Police 227; Ambulance 241. No fire service station at present.

TELEPHONE: No facilities for telephones on board.

SERVICES: None available.

SHORE LEAVE: Port Immigration issue shore passes to all foreign nationals excepting Chinese and Pakistanis and with shore passes crew allowed ashore.

DELAYS: Vessels generally get berth on "First Come First Served" basis.

DEVELOPMENTS: Turning Basin enlarged to 520 m. Second cargo berth under construction. Transit sheds and warehouses have been constructed.

SHIPMASTERS REPORT No. 1: (1975). Suggest vessels follow the normal procedure for Calcutta re-arrival documents.

Customs officials require the personal attention of the Purser to a greater extent than in any other Indian port.

Stores: Fresh stores about average quality for Indian ports. One is not advised to try to buy meat or fish as these commodites come from Cuttack, a good distance away, and frozen imported meat is not available.

SHIPMASTERS REPORT No. 2: (1976).

Berths: Apart from 1 iron ore berth and 1 mooring berth there is now a general cargo berth. The long arm has a length of 290.65 m. and a short arm 118.40 m. The depth alongside is 36 ft. 2 ships are normally berthed at the long arm but the ship at the Southern end normally overhangs slightly (when 2 average size ships are berthed).

Stevedores: There are a number of stevedores available at the port. No notice is required.

Services: Fresh provisions are available but 24 hours notice is required for most items. Laundry can also be arranged by Agent.

AUTHORITY: Chairman, Paradip Port Trust.

PONDICHERRY: 11.56 N. 79.50 E.

DOCUMENTS:

Ship's Register.
Load Line Certificate.
Safety Equipment Certificate.
Safety Radio Certificate.
Last Port Bill of Health.
Last Port Clearance.
Store List with Private Property Declaration in Triplicate.
Crew List (8 copies).
Light Dues Receipt.
Manifest (Import or Export).
Bill of Lading.

PILOTAGE: Not necessary as open roadstead anchorage.

ANCHORAGES: Proper anchorage in line with New Pier. 2 chimneys in line (276°) will provide good transit in day time and at night green/red light in transit with red pier light can be taken.

MAX. SIZE: Anchorage is 7 fathoms within 1 mile from New Pier.

HEALTH: Free pratique obtained on arrival and Master expected to address message to Port Health Officer, advising that all are well on board. Free pratique automatic for vessels calling from any Indian ports.

RADIO: Cables routed through Madras Radio (call sign VWM).

TUGS: Tug kept ready at New Pier for towing barges.

BERTHING: No berths.

STEVEDORES: 48 hours notice prior to arrival. Rate of discharge of bagged cargo 800 to 1,000 tons per day.

MEDICAL: No advance notice necessary. General Hospital and Jipmer Hospital available.

TANKERS: Transfer operations are carried out at anchorage 1.5–2.5 miles off shore.

DENSITY: 1025.

FRESH WATER: Not available.

FUEL: Not available.

DEVELOPMENT: Proposals finalised for construction of new lighthouse near New Pier.

GANGWAY/DECK WATCHMEN: Services not compulsory, but recommended to avoid pilferage. 3 watchmen day/night.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CUSTOMS ALLOWANCES: Tobacco, 200 cigarettes permitted for each Crew member to be held out of bond. Wine and/or Spirit, 1 open quart bottle per Crew member permitted to be held out of bond.

IDENTIFICATION CARDS: Not needed if furnished with Crew List.

CONSULS: Only French Consulate General. Tel. 58.

REPAIRS: Deck and Engine repairs not attended. Special arrangements can be made from Madras. Minor repairs carried out privately.

DRY DOCKS: None.

REPATRIATION: Facilities exist for effecting crew changes and arranging necessary repatriation.

AIRPORT: Nearest airport is Meenambakam Airport, Madras, distant 160 km.

TIME: GMT plus 5.5 hours.

HOLIDAYS: Observed as declared by Authorities but cargo work arranged on all holidays on payment of overtime, except on Republic day, Gandhi's Birthday, May Day and Independence Day.
POLICE/AMBULANCE/FIRE: Police 100; Fire 101; Ambulance arranged through hospital doctor on duty, tel. 198.
TELEPHONES: No facilities to place on board.
GENERAL: For purposes of crew going ashore, launches arranged between 0600 hrs. and 1800 hrs. weather permitting, hired from private parties. Laundry facilities, supply of fresh vegetables and provisions arranged.
SERVICES: None.
SHORE LEAVE: Crew members permitted ashore but have to remain within town limit.
DELAYS: Delays occur only under unavoidable circumstances such as Surf Declaration, Cyclone, etc. Vessels arriving at night, commence discharge operations next morning.
AUTHORITY: Port Officer.

PORBANDAR: 21.38 N. 69.36 E.

DOCUMENTS:

Crew Lists (6 copies).
Passenger Lists (6 copies).
Customs Documents to be prepared by Agents and signed by Master (4 copies).
Arms and Ammunition Certificate 4 copies duly signed by Master.
Health Documents; all yellow fever, cholera and smallpox books should be valid on arrival as well as on departure, if they are not valid on departure Port Health Officer should visit ship and give required injection to persons for completing health books before obtaining Bill of Health.
Port Clearance: Port Clearance of last port to be submitted to Boarding Officer of Customs.
Private Property List (6 copies duly signed by Master).
Store List (4 copies duly prepared by ship's officer).
Currency Declaration (4 copies).
Bills of Lading: Bills of Lading for export cargo generally to be prepared and signed by Agents.

PILOTAGE: Compulsory for inward/outward or for all shifting in the Harbour between berth and buoys.
ANCHORAGE: Anchor in stream about 1.5 miles off shore. 6 fathoms at low water, with good holding ground.

Outer anchorage is with Rajah's Old Palace, about 1.5 miles South-eastward of lighthouse, bearing 85° and lighthouse bearing 26°, 4.5 to 5 fathoms sand and rock (or further out as required).
MAX. SIZE: Any size vessel at anchorage. Alongside berth – Max. LOA of vessels up to 215 m. Max. permissible draft 9.75 m. No beam restrictions.

1 mooring buoy – max. draft 7 m.

For roadstead, no restrictions on length or breadth.
HEALTH: If arriving from yellow fever area within 30 days a grant of free pratique is necessary. Mosquito Party to be deputed from Kandla, which can only be arranged by prior intimation, failing which vessel would have to proceed to either Kandla or Bombay for free pratique.
RADIO: Porbandar call sign VWY, working frequency 462 kc/s. and watch keeping on 500 kc/s.
TUGS: Will join ships for assisting berthing/unberthing.
BERTHING: 1 alongside berth and 1 mooring buoy.
STEVEDORES: 24 hours notice required for Agents to arrange gangs.

Average rate of working – 380 to 400 tons per gang per day.
Export Commodities: G.N. extraction in bags, cement in bags, soda ash, frozen fish, lime and lime stone, lime powder, bauxite.
MEDICAL: Government hospital available. There are also private hospitals.
TANKERS: Presently no facility for discharging oil.
from bonded stores of ship. Wine and/or Spirit: Customs Officer remains on board from arrival till departure and issues required quantity of wine and spirit from bonded stores. Quota is issued every week.
CARGO GEAR: Tested cargo gear should be used for loading and discharging operations.
IDENTIFICATION CARDS: Necessary.
CONSULS: None.
REPAIRS/DRY DOCKS: A dry dock of 150 ft.×55 ft. for repairs to port crafts. Also port workshop for repairs to shore and marine equipment.
AIRPORT: 3 miles from town, daily flight to Bombay.
TIME: GMT plus 5 hours.
HOLIDAYS: Observed as declared by Government of Gujarat and can be worked on payment of overtime charges, but work on non-working days like Indian Republic Day, Independence Day, Holi (2nd Day), Ramnavami, Muhurram, Gokul Ashthami, Dessera, Diwali (New Year) and Ramzan-Id not possible.
POLICE/AMBULANCE/FIRE: Police Station 114; Ambulance/Fire Brigade 244.
SHORE LEAVE: Police, port and Customs permission required before landing.
AUTHORITY: Port Officer.

PORT REDI: 15.44 N. 73.39 E.

DOCUMENTS: Arrival:

Maritime Declaration of Health Form (in duplicate).
Port Clearance from last port of call.
Ship's Stores List (in triplicate).
Crew Private Property List (in triplicate), containing full details of every article such as: cameras, radios/transistors, record players, records, watches, all types of currency, other valuable articles, souvenirs, spirits, etc.
Crew Lists (6 copies).
Ship's Currency List (in triplicate).
Arms and Ammunition Declaration.
Passenger List – if any.
Through Cargo Manifests.

Departure:

Medical Inspection or Examination Certificate (Bill of Health).
Port Clearance.
Consumed stores list in duplicate (a list of stores consumed during the stay of the vessel at port).

PILOTAGE: Compulsory. Port Officer acts as Pilot. Cable via Bombay Radio to Port Officer, Redi, Cable Address: Port Officer Vengurla, ETA of vessel 48 hours prior arrival (cable should reach Port Officer before 24 hours prior arrival). Anchor off Rairi Point – West of Rairi Point – about 1 to 1.5 miles where Port Officer boards ship to pilot to proper loading anchorage. Pilotage restricted to daylight hours only. Shifting without Pilot not permitted.

On arrival keep gangway or complete pilot ladder with manropes and step-down, ready for Pilot.

No fixed anchorage marked at Pilot station; however, vessel should not proceed beyond 1 mile from Rairi Point (for safety of vessel). Keep engine ready till Pilot boards. If vessel arrives during night hours be ready for shifting next morning.
ANCHORAGE: Anchorage Rairi Point or Redi Point (Lat. 15° 44′ N. Long. 73° 39′ E.) is a flat rocky projection, Western extremity of which is 50 ft. (15.2 m.) high. Foul ground and shoal water extend about three-quarters of a mile S.S.W. and about half a mile Westward of this point; at Southern side of foul area is Rairi (Redi) Rock which is 36 ft. (11 m.) high and steep. Vessel should not proceed into depths of less than 6 fathoms or within 1 mile Westward in vicinity of this point without Pilot.

Loading anchorages are on both sides of Rairi Point (known as Jetty One anchorage and Jetty Two anchorage).
MAX. SIZE: No restrictions on size. This is a minor port exporting only iron ore, and vessels up to 34 ft. draft load at safe anchorage.
HEALTH: On arrival, Customs Authorities board and grant free pratique to ships arriving under normal conditions and on completion of Maritime Declaration of Health Form. Medical Officer, Candy Dispensary, Vengurla, acts as Port Health Officer (Quarantine Officer) for this port, and boards vessel at his convenience before sailing to conduct Medical Examination and grants Medical Examination Certificate (Bill of Health) on day of sailing. Certificate to be collected from Vengurla Office. No facilities for radio pratique.

If coming from yellow fever or jigger infected regions within 30 days Port Health Officer grants pratique after boarding vessel with mosquito party deputed from Bombay at Owners' cost. Mosquito Party can only be arranged on advance information failing which, vessel would have to proceed either Bombay and/or Mormugao for free pratique. Master and/or Owners to give Agents prior notice to avoid delay in arranging pratique. Vessels transitting through above infected areas for bunkers or water only do not require mosquito party for obtaining pratique.

Advisable inform Agents prior to arrival of last port of call, crew, and nationality, and if arriving from yellow fever and/or jigger infected regions, whether called only for bunkers or water, or purpose of call and vessel's health condition.
RADIO: Bombay Radio.
BERTHING: No berths. Open roadstead port.
LOADING: Port only exporting iron ore in bulk and suppliers. The Minerals & Metals Trading Corporation of India Ltd., make own arrangements to load cargo on FOBT terms. Rate between 3,000 to 4,500 tons per day per vessel if 3 vessels are working and 4,000 to 6,000 tons per day if 1 vessel is working. This rate is being achieved due to increase fleet and improvement of shore loading facilities.
MEDICAL: Preliminary medical aid available at Port Redi/Shiroda. Well-equipped hospitals situated at Savantwadi and Vengurla about 25 and 45 miles away respectively by road. Cholera inoculations and smallpox vaccination done through Port Health Officer and if required this information may be passed on to Agents for arranging with Port Health Officer.
DENSITY: Average 1025.
FRESH WATER/FUEL: None.
GANGWAY/DECK WATCHMAN: Not necessary.
OPENING/CLOSING HATCHES: As per Charter Party. However, opening done by stevedores to save their time and commence loading earliest during free time.
CERTIFICATES: All certificates, particularly Cargo-gear Certificate to be in order and valid.
CUSTOMS ALLOWANCES: 200 cigarettes per week of 7 day per crew. Wine and/or Spirit, 1 bottle each per crew of spirit or beer as required.
IDENTIFICATION CARDS: Necessary.
CONSULS: None.
REPAIRS/DRY DOCKS: None.
REPATRIATION: Facilities for crew changes. 4 days advance notice required with full particulars of crew.

AIRPORT: Belgaum and/or Vascodagama 90 miles distant.
TIME: Indian Standard Time GMT plus 5.5 hours.
HOLIDAYS: Cargo work can be arranged on overtime on all holidays except 26th January, Republic Day; 2nd October, Mahatma Gandhi Birthday; 15th August, Independence Day. On these holidays work not permitted even on overtime.
GENERAL: Regular Post and Telegraph Office about 2.5 miles from jetty.

Vessels on arrival and at departure thoroughly examined by Customs, and Masters therefore requested to ensure that crew private property list is correctly presented to Customs Authorities and its accuracy maintained throughout stay of vessel.

Ship's wireless station not to be used for despatching cables during the vessel's stay.

Discharge of bilge water and/or dirty waste oil or cargo prohibited.

Fresh vegetables, etc., supplied in limited quantity from 90 miles distance.
SHORE LEAVE: Crew of Chinese and Pakistani nationality not allowed land on shore. Other crew permitted land only after obtaining requisite permission from Police Authorities from Ratnagiri, distant about 160 miles and thereafter from Customs Authorities. On arrival, crew list and guarantee duly signed by Master, are furnished to Police Authorities at port and telegram sent to Ratnagiri requesting landing permission from District Superintendent of Police.

Obtaining landing permission takes 3 days; and therefore, Masters requested not to allow crew members to land on shore unless written landing permission sent on board. Crew members not allowed beyond Port Redi limits, without permission obtained from Police Authorities, Ratnagiri.
REGULATIONS: Port Officer conducts Final Draft Survey on completion of loading in consultation with Master. Master's refusal to allow shifting creates complications. Master should not shift vessel without Pilot on board or permission from Port Officer; this does not apply in case of emergency.
DELAYS: Only 3 vessels (i.e. 1 at each jetty) can work at a time on a first come first served basis. Overlapping vessels have to wait turn. Waiting time about 4/5 days.
AUTHORITY: Port Officer.

TUTICORIN: 08.48 N. 78.10 E.

DOCUMENTS: Required on arrival:
4 Manifests.
2 Bills of Lading.
5 Crew Lists.
5 Passenger Lists.
4 Crew Personal Property Declaration.
4 Crew Currency Declaration.
4 Import Manifest of Store List.
2 Health Report Form.
PILOTAGE: Pilotage compulsory within Port Limits. However, there is no night pilotage.
ANCHORAGE: Anchorage in roadstead with Pandyan Tivu Lighthouse, bearing between 260° and 292°, distant 2 to 2.5 miles, in depths 27 to 33 ft. (8.2 m. to 10 m.); holding ground good, mainly sand, mud and shingle.

In N.E. monsoon, vessels should have a good length of cable and second anchor always ready, as sea breeze blows on reef Eastward of Pandyan Tivu. In S.W. monsoon, middle May to middle August, wind though violent, is invariably off shore, West to S.W., and water fairly smooth.
HEALTH: Free pratique granted to vessels carrying food grains or fertilisers on Government of India a/c. Master required wireless Port Health Officer, Tuticorin, requesting grant of free pratique. On receipt of message Port Health Officer grants pratique and message passed by radio to steamer. This applicable only in cases where steamers have no infection, epidemic or disease. Otherwise Port Health Officer boards vessel on arrival and grants pratique after inspection.
RADIO: When vessels within 24 hours distance Tuticorin Radio could be used and call sign VWT. Otherwise according to route followed, steamers use Madras or Bombay Radio.

VHF service available between ship and shore.
TUGS: Tugs available but if services required special arrangements have to be made. Ships usually anchor in open roads and enter and sail without tug assistance.
BERTHING: See "Developments".
STEVEDORES: Agents require 48 hours notice of ETA for arranging gangs, and receivers for lighters. General cargo, average rate load or discharge about 1,000/1,200 tons per weather working day.
MEDICAL: For doctor's visit on board early advice helps to arrange for tug or launch to take doctor from shore. In cases of emergency, medical attention can be arranged but there may be some delay. Hospital facilities available. Personnel should have valid inoculation and vaccination certificates. If certificates expired arrangements made for re-vaccination/re-inoculation and renewal of certificates.
TANKERS: No facilities.
FRESH WATER: Available. Barge-capacity 100 tons. Delivery in units of 100 tons only. During Summer, usually shortage of water. In other seasons water available but as only 1 barge, delivery of water arranged by turn depending upon number of steamers in port. Fresh water also available at Berth No. 1.
FUEL: None.
DEVELOPMENTS: The New Major Port has been declared a Major Port under Indian Ports Act with effect from 1974. All four berths are open for traffic. The 4 berths have a draft of 27 ft. at all stages and approximately 30 ft. on high tides. Two cranes of 3 tons and one crane of 5 tons are available for cargo handling at all times.
GANGWAY/DECK WATCHMEN: Engaging watchmen always done at the discretion of Masters. In case required could be engaged.
OPENING/CLOSING OF HATCHES: By ship's crew. If done by stevedores charges extra.
CERTIFICATES:
Ship's Register.
Safety Construction Certificate.
Load Line Certificate.
Safety Equipment Certificate.
Safety Radio & Telegraphy Certificate.
Deratisation Certificate.
Cargo-gear Stability Certificate.
IDENTIFICATION CARDS: Identification cards or seamen's passbook required to be presented to Police and immigration authorities while coming on shore.
CONSUL: None.
REPAIRS: No maritime workshops. Only minor repairs.
DRY DOCKS: A dry dock with workshop facilities has been constructed at the Port for docking and attending to repairs of departmental vessels. It is spared to other Departments and Owners of sailing vessels for docking their vessels whenever required.
REPATRIATION: Could be arranged via Madras.
AIRPORT: Nearest airport is Madurai, distant 100 miles, which could connect Madras.
TIME: GMT plus 5.5 hours.
HOLIDAYS: Observed as declared by authorities but boatmen do not work on following holidays as these are days of obligation and festivals: New Year's Day, Republic Day, Maundy Thursday, Good Friday, Tamil New Year Day, May Day, Ascension Day, Corpus Christi, Our Lady of Snows Feast, Assumption Day and Christmas.
POLICE/AMBULANCE/FIRE: As steamers are in open roads about 5/6 miles from shore all emergency to be passed to Port Authorities through signal station and to respective Agents.
SHORE LEAVE: Crew allowed shore leave but movements limited to municipal limits. Must obtain shore permits from police.
REGULATIONS: Usual regulations. All crew members coming into shore and returning to ship must report to Customs and Port Police on every trip.
AUTHORITY: Port Conservator, Tuticorin Port Authority.

VERAVAL: 20.54 N. 70.22 E.

DOCUMENTS:
Last Port Clearance.
Ship's Stores Manifest (3 copies).
Crew List (5 copies).
Private Property List of Crew (3 copies).
Same Bottom Cargo (3 copies).
Ship and Crew Currency List (3 copies).
Indian Coast Light Dues Receipt (if vessel arriving from Indian port).
Maritime Declaration of Health.
Customs Arrival Report.
Customs Declaration for arms ammunition, etc.
Port Arrival Report.
PILOTAGE: Not required. Vessels anchor midstream.
ANCHORAGES: Veraval light exhibited on coast near Political Residency (occ. 15 sec. 110 ft.). Known as New Lighthouse. Breakwater near harbour under 3 fathoms (5.5 m.). No perceptible tide streams in roadstead. During night/neap tide with low water ships suffer cargo feeding for about 5 hours, 4 to 5 days in month.

Anchorage depth 48 to 60 ft. opposite Phiriya Temple. Good anchorage obtained with Veraval Lighthouse Bearing 317°, breakwater end. True Bearing 336.5°, Bhiria Beacon 27°.
RESTRICTIONS: None, day or night anchorage possible.
MAX. SIZE: No restriction.
HEALTH: Vessels having called yellow fever area and taken on board passengers or crew (other than bunkers or water) granted free pratique by mosquito party deputed from Kandla Port which only arranged by prior notice, failing which vessel would have to proceed either Kandla or Bombay for free pratique. Vessels other than above are granted pratique by Boarding Officer of Customs upon presenting Maritime Declaration of Health. Radio pratique not available.
RADIO: Messages via Bombay Radio. No VHF.
TUGS: Not required.
BERTHING: No berths.
STEVEDORING: Particulars of ETA and labour gangs required well in advance. Average loading/discharging:

Loading bagged cargo oilcake, etc.	225/250 Ts. per hook per day
Loading GN oil in drums	150/175 Ts. per hook per day
Discharging fertiliser (bagged)	150/200 Ts. per hook per day
General cargo loading/discharging	150/200 Ts. per hook per day

MEDICAL: Qualified doctors and hospital facilities.
TANKERS: No tanker berths.
FRESH WATER: No guarantee of supply as this is a scarcity area however 100 tonnes of fresh water may be supplied on every third day.
FUEL: None available.

GANGWAY/DECK WATCHMEN: Not necessary unless required. Can be arranged through Agents.
OPENING/CLOSING HATCHES: Carried out by stevedores. Ships' derricks worked by crew.
CERTIFICATES:

Safety Equipment Certificate.
Load Line Certificate.
Safety Radio-Telegraphy Certificate.
Deratisation Certificate.
Ship's Registration Certificate.

CONSULS/REPAIRS: None.
REPATRIATION: Can be arranged.
AIRPORT: Nearest airport Keshod, 30 miles from Veraval, but motor transport not easily available and advance arrangements have to be made.
TIME: Local Time GMT plus 5.5 hours.
HOLIDAYS: On which work not allowed for loading/discharging: Indian Republic Day, Holi (Second Day), Ramnavami. Mohurram (Ashura or 10th day), Gokulashtami, Dussera, Diwali (New Year's Day), Ramzan-Id (Id-ul-Fitr).
POLICE/AMBULANCE/FIRE: Police 3; Ambulance 5; Fire 5.
TELEPHONES: No arrangements for placing telephones on board the ship.
GENERAL: Closed for traffic between 15th May to 15th September every year due to monsoon season.
SHORE LEAVE: Crews permitted ashore with permission from Customs and Port Authorities. While coming ashore and returning to ship crew should pass through Customs.
DELAYS: 3 ships can work and fourth vessel if for lifting frozen fish can work during night hours only. Fourth vessel other than frozen fish cargo wait in turn.
AUTHORITY: Port Officer.

VISAKHAPATNAM: 17.41 N. 83.20 E. (See Plan Book)

PORT LIMITS: 10 fathoms line of soundings may be taken as the seaward boundary of the port within which a vessel is considered to be an "arrived vessel". It is proposed that 3 nautical miles East of and parallel to 10 fathoms line of soundings may be taken as the seaward boundary.
DOCUMENTS:

12 copies of Crew List.
3 copies of Store List.
3 copies of Private Property List.
3 copies of Currency Declaration.
3 copies of watch lists, giving details of make and value, etc.

The vessel must possess following valid certificates:

Ship's Register.
Load Line Certificate.
Safety Equipment Certificate.
Safety Construction Certificate.
Safety Radio Telegraphy Certificate.
Cargo Gear Test Certificate.
Deratisation Certificate.
Last Port Clearance.

Pilot on boarding vessel before bringing her in gives a copy of Maritime Declaration form which should be filled in and signed by Master.
PILOTAGE: Vessels generally anchor at roadstead where Pilots board. Signal station contacts all vessels arriving and advises all information about Pilot's arrival, etc. A minimum notice of 48 hours of vessel's ETA required. Pilot ladder to be rigged on the Starboard side.
ANCHORAGE: Anchorage position to be marked with Dolphin's Nose Lighthouse bearing 270° (T) at a distance of 1.5 miles.
RESTRICTIONS: *Inner Harbour:* Round-the-clock pilotage, subject to following restrictions.

Ore carriers of 640 ft. length overall and 100 ft. beam can enter the port between 0600 and 1800 hrs. Ore carriers of 640 ft. length, 100 ft. beam, and 33 ft. 6 in. draft can sail on high water on a minimum rising tide of 3 ft. 6 in.

Vessels of 630 ft. overall length, 33 ft. draft and 100 ft. beam can enter the port between 0600 and 1800 hrs. on high water on a minimum rising tide of 3 ft. Such vessel can sail from the port at any time, draft being less than 31 ft., between 31 ft. and 33 ft. subject to height of tide of 3 ft. for 33 ft. draft.

Vessels of 575 ft. length overall or less and draft 30 ft. or less can enter and sail from the port at all hours.
Outer Harbour: No tidal restrictions.
MAX. SIZE: *Inner Harbour:* Max. permissible length 640 ft. overall. Max. permissible breadth 100 ft. Max. permissible draft 33 ft.
Outer Harbour: L.O.A. 885 ft. 10 in. (270 m.)
Beam 137 ft. 10 in. (42 m.)
Draft 50 ft. 03 in. (15.3 m.)
PRATIQUE: A separate radio free pratique message addressed "Quarantine Visakhapatnam" must be transmitted by all vessels arriving from foreign port not less than 4 hours and not more than 12 hours prior ETA. No necessity for any vessel to obtain free pratique when she arrives directly from any Indian port.
Shipmaster's Report: 1978. Specimen of Quarantine Message:
"Vessels name ETA .... ZT Malta 15/4 (Ports called last 30 days with departure dates). No monkeys aboard, no persons embarked at Djibouti or Aden. Request Free Pratique".
RADIO: Radio station call sign VWV. Working round clock. Range about 600 miles during daytime and 1,000 miles during night. Better to use Madras Radio Station for all communications in respect of vessels arriving from Madras side. Vessels coming from Calcutta side, use Calcutta Radio. Generally Visakhapatnam Radio station used for vessels anchored at roadstead. VHF Channel 16.
TUGS: For ships entering the port, the tugs wait in the lee of the breakwater. Ship's lines and/or tug's lines are used, depending upon the mode of making fast.

SPECIALISED CARGO HANDLING FACILITIES: Inner Harbour: *WOB-1 and WOB-2 Berths:* For the export of iron ore through a mechanical ore-handling plant capable of loading at the rate of 3,200 t.p.h.

Fertiliser Berth: For the import of fertiliser raw materials, viz., sulphur and rock phosphate, by grab unloading on to a conveyor belt.

OR-1 and OR-2 Berths: For the import and export of P.O.L.
Q-1 and Q-2 Berths: For the export of manganese ore and other ores by semi-mechanical means. Portable flat belt conveyor system for handling bulk cargoes.

Use of grabs for unloading bulk cargoes.
Poclain hydraulic excavator for handling bulk cargoes.
A large number of electric cranes, mobile cranes, forklifts, dumpers, trailers etc.

Outer Harbour: *OB-1 and OB-2 Berths:* For the export of iron ore through a mechanical ore handling plant capable of loading at the rate of 8,000 t.p.h.

Also see "Tankers" and "Developments".
BERTHING: No specific requirements of arrival times for berthing.
STEVEDORES: Agents must give proper notice of vessel's arrival to the stevedores not less than 48 hours to make necessary arrangements for working vessel and also to order sufficient gangs, etc.
MEDICAL: All crew and officers must possess individual international vaccination certificates against smallpox and cholera before leaving this port for any foreign port. Smallpox vaccination and cholera inoculation facilities available within 24 hours notice. Well-equipped hospital facilities available round the clock.
TANKERS: There are two berths OR-1 and OR-2 for discharging and loading oil. The max. permissible draft at these berths is 33 ft. at High Water. The depth alongside OR-1 and OR-2 is 32 ft. In the Outer Harbour, an oil mooring berth is available to accommodate tankers of up to 100,000 d.w.t. with a draft of not exceeding 47 ft.
DENSITY: Fluctuates from day to day between 1020 and 1023.
FRESH WATER: Normal quantities available and delivery made by Port Trust both from shore and barges.
FUEL: Esso, Indian Oil Corporation and Caltex, Bombay, to be contacted for particulars of stocks, etc., as local offices controlled by them.
DEVELOPMENTS:
Outer Harbour Project:

1 The Outer Harbour will have a set of breakwaters to form a protected basin. The Southern part of the basin will permit entry and berthing of 100,000 d.w.t. ships fully loaded, initially. This would ultimately be developed to take 200,000 d.w.t. vessels or even more. The Northern part of the basin will be suitable for use as a large fishing harbour.

2 It will have a finger-type berth for iron-ore loading, designed to handle 200,000 d.w.t. vessels ultimately, providing facility for berthing of 2 vessels on either side of the jetty at the same time. There will also be room for 3 additional general cargo/container berths for 60,000 d.w.t. ships which could be brought into commission in future by reclaiming the area between the fishing harbour basin and outer harbour basins.

3 The ore loaded at the outer harbour berth will be conveyed through a conveyor system and necessary steps will be taken to eliminate the dust nuisance to the utmost extent.

4 The outer harbour project has been designed to load 100,000 d.w.t. vessels at 8,000 tonnes per hour initially. This can be increased to 12,000 tonnes per hour and 16,000 tonnes per hour to load 150,000 and 200,000 d.w.t. vessels respectively when such a demand builds up. A stockpile capacity of 30 days supply on the basis of the levels of shipment will be provided. The receiving system including the 2 existing dumpers and additional railways and shunting locos can handle about 10 million tonnes of iron ore per year from the mines. With a third dumper, the capacity could be increased to 15 million tonnes.

5 Provision will be made to the installation of a screening and/or calibrating plant and pallet plant, in future.

6 The project includes navigation aids, harbour craft, as well as other ancillary facilities required for operation of the outer harbour.

The construction of outer harbour project is almost complete. The trial loading of iron ore in the outer harbour is on and formal commissioning is expected during the third quarter of 1976. The outer harbour project will be the deepest harbour in the country with a depth of 16.5 m. (54 ft.), alongside the berth. An oil mooring berth in the outer harbour was constructed and commissioned to accommodate tankers of 100,000 d.w.t for transhipment of oil from mother tankers to daughter tankers. Max. draft allowed at the oil mooring is 47 ft.

Break-waters under construction:

In connection with the Outer Harbour Project, the 3 breakwaters under construction are in the following positions:

	Latitude	Longitude
(1) South Breakwater:		
Western end:	17° 40′ 41.10″ N.	83° 18′ 00.30″ E.
Eastern end:	17° 41′ 01.43″ N.	83° 18′ 49.12″ E.
(2) East Breakwater:		
Southern end:	17° 41′ 14.93″ N.	83° 18′ 29.30″ E.
Northern end:	17° 41′ 47.29″ N.	83° 18′ 34.72″ E.
(3) North Breakwater:		
Northern end:	17° 42′ 02.00″ N.	83° 18′ 24.00″ E.
Southern end:	17° 41′ 47.77″ N.	83° 18′ 27.23″ E.

Spoil ground: A new spoil ground has been established in the following position:

Latitude	Longitude
17° 39′ 35″ N.	83° 19′ 19″ E.
17° 40′ 01″ N.	83° 19′ 40″ E.
17° 40′ 40″ N.	83° 20′ 37″ E.
17° 38′ 59″ N.	83° 19′ 45″ E.
17° 39′ 26″ N.	83° 20′ 04″ E.
17° 40′ 06″ N.	83° 21′ 01″ E.

GANGWAY/DECK WATCHMEN: Necessary according to demands of local labour unions.

OPENING/CLOSING HATCHES: Stevedores.

CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes per head per week. Wine and/or spirit: Asian Crew 2/5 units per 3 days. Non-Asian crew 4/5 units per 3 days. Bottle of liquor equals unit.

CARGO GEAR: Valid cargo gear test certificate must be on board all vessels using ships' gear for loading or discharging.

IDENTIFICATION CARDS: Not needed if have valid seaman's books.

CONSULS: None.

REPAIRS: All types of deck and engine repairs possible.

DRY DOCKS: 2. 1 owned by Hindustan Shipyard Limited, 800 ft.×125 ft.×26.5 ft. (maximum length of vessel 780 ft.). Second owned by Port Trust – 450 ft.×60 ft.×18.5 ft. (maximum length of vessel 400 ft.).

REPATRIATION: Facilities exist to foreign countries via Madras, Calcutta or Bombay. About 3 days delay to obtain travel permit.

AIRPORT: Distant 6.5 miles. Regular daily flights to Calcutta and Hyderabad by Indian Airlines Corporation.

TIME: Indian Standard Time is local time, and no alterations made to clocks during the year. GMT plus 5.5 hours.

HOLIDAYS: Observed as declared by authorities but port's closed holidays are: Pongal, Kanumu, Mukkanumu, Republic Day, Kotha-Amavasya, May Day, Independence Day, Gandhi's Birthday and Nagulachaviti, when work not possible even on payment of overtime.

POLICE/AMBULANCE/FIRE: Police Station 2140; Fire Station 4841 – Ext 239; Ambulance 4841 – Ext 213 (Port Hospital).

TELEPHONES: No arrangements exist for placing telephone on board.

SERVICES: Tank cleaning facilities available at Caltex berths.

SHORE LEAVE: Crew members allowed ashore after receiving immigration permits.

GENERAL: *Priority:* Vessels arriving at this port for berthing at various berths on priority if they so desire can register their priority at "Roads" and move to other ports. But the vessel should be back within Visakhapatnam Port limits when the berth (for which registration was made) falls vacant. If the vessel is not ready at Roads, the vessel would lose its priority and take its turn along with other waiting vessels including vessels which have registered with the port for the priority berthing.

DELAYS: Normal delays such as waiting for Pilot, waiting for tugs, etc., since this port can handle only one movement at a time. Other delays such as no power to shore cranes, bad weather, shed congestion, etc., expected.

SHIPMASTERS REPORT:

Port Limits: Appear to be accepted upon the basis of VHF information to local port control that one has in fact anchored, rather than being in a particular area.

Anchorage: Harbour Master and Pilots prefer that ships anchor South of a line running East/West from the entrance, depth chosen to suit individual requirements.

Special Cargo Handling Facilities: The "Q" berths are now No. 1 for manganese, Nos. 2 and 3 for grain and the remainder for general cargo. All are in difficulties with Customs over shed and wharf clearances and this has created long delays both in getting alongside and working. The grain is bagged in the holds and discharged via snotters on ship's gear. Total rate roughly 1,000 tons per day per ship.

Fresh Water: There have been no useful rains for several years and water is at a premium. When a ship advises the local authorities that she is out of water, a layup berth or buoys is allocated and a minimum amount is supplied by barge. This is repeated throughout the ship's stay. No question of filling tanks, and supply may be 30 tons every 2 or 3 days.

Fuel: Diesel oil here is not suitable by choice for most merchant ships. 2 grades, heavy diesel of some 225° Redwood at 100° and light diesel which is 57° Redwood at 100°.

Repatriation: Allow 5 days for travel permits.

Delays: Tankers berth more or less on arrival. Ore loaders wait 1 or 2 days as the terminal becomes vacant – 2 loading arms at around 1,000 t.p.h. Grain and cargo boats can expect to wait up to a month for a berth and will be 2 or 3 weeks alongside.

AUTHORITY: Visakhapatnam Port Trust.

NOTES

Please also advise Shipping Guides Ltd.

Indonesia

AMBON: 03.41 S. 128.10 E.

DOCUMENTS:

- 14 Passenger Lists.
- 7 Crew Lists.
- 2 Customs Documents.
- 2 Health Documents.
- 7 Cargo Manifests.
- 7 Bills of Lading.
- 5 Ship's Papers.
- Sailing Permit.

PILOTAGE: No Pilot station. Apply for pilot boat by calling Ambon Coast Station (Ambon Radio) or fly "G" Flag. Pilot boat located at Ambon Bay. Entrance in all seasons and weathers. All parts of Ambon Bay suitable for anchorage to await Pilot.

ANCHORAGE: Areas of anchorage can take all sizes of vessel.

RESTRICTIONS: Open 24 hours. Tides do not affect entry. But when entering at night ship must anchor and await orders.

MAX. SIZE: Joos Soedarso Pier: length 187 m., breadth 35 m., draft 12 m. Wainitu Pier: length 100 m., breadth 20 m., draft 8 m.

HEALTH: Port Health officer boards vessel together with Pilot.

RADIO: Ambon Coast Radio, call sign PKE. Operating 24 hours. Frequencies 500–470 kc/s., 8472 and 8799 kc/s. VHF all Channels used.

TUGS: Normally tugs do not join vessel but when necessary to use tugs call PT "Dock Waijame".

STEVEDORES: Agent arranges. 3 stevedore companies: PT. "Gotong Rojong", PT. "Mastra" and PN. "Varuna Tirta Prakarsa".

MEDICAL: Hospital facilities available. No advance notice required.

TANKERS: Berth at Wainitu Pier. Type of pipe, 6 in. and 8 in. Discharging capacity, 125 t.p.h.

FRESH WATER: Available only at Joos Soedarso Pier. Loaded by pipe-line with 25 tons/hour capacity.

FUEL: Only diesel and marine fuel.

DEVELOPMENTS: Plans for future developments dependent on Government expenditure.

GANGWAY/DECK WATCHMEN: Deck watchmen needed, particularly for tankers.

OPENING/CLOSING HATCHES: Carried out by stevedores.

CUSTOMS ALLOWANCES: Cannot be held out of bond.

IDENTIFICATION CARDS: Needed by Immigration (landing permit).

CONSULS: No consuls available locally.

REPAIRS: Deck and engine repairs available. Floating dock, lifting capacity for 2,000 d.w.t.

REPATRIATION: Possible. Dealt with by Immigration through Jakarta.

AIRPORT: Distance from airport about 7 miles. Regular airline "Garuda Indonesian Airways" (GIA). 4 flights per week from Ambon to Jakarta.

TIME: Local time GMT plus 10 hours.

HOLIDAYS: Port open for 24 hours even in holidays.

POLICE/AMBULANCE/FIRE: Police and Port Health at Port. But when necessary to use fire brigade call by connecting to "Burgomaster".

SHORE LEAVE: All crew members allowed ashore with permission of Immigration.

AUTHORITY: Ambon Port Administration.

ARDJUNA: 05.54 S. 107.57 E. (See Plan Book)

LOCATION: Ardjuna Marine Terminal is an open, unsheltered mooring in the Java Sea, about 18.5 miles from the nearest point on the North Coast of Java.

The Terminal is approximately North 72° East distant 59 nautical miles from Jakarta.

There are 4 standard type single buoy moorings and one rigid arm single buoy mooring situated as follows:

1. A chartered crude oil Storage Tanker SBM (Buoy No. 1)
   Latitude 5° 54′ 15″ South.
   Longitude 107° 44′ 22″ East.
2. Butane SBM for Butane Export Tankers (Buoy No. 2)
   Latitude 5° 53′ 19″ South.
   Longitude 107° 45′ 18″ East.
3. Crude oil Storage Barge "Arco Ardjuna" SBM (Buoy No. 3)
   Latitude 5° 54′ 11″ South.
   Longitude 107° 43′ 45″ East.
4. Export SBM for loading from "Arco Ardjuna" (Buoy No. 4)
   Latitude 5° 53′ 29″ South.
   Longitude 107° 43′ 20″ East.
5. Liquefied Natural Gas Storage Barge "Ardjuna Sakti" rigid-arm type SBM. (Buoy No. 5).
   Latitude 5° 53′ 10″ South
   Longitude 107° 44′ 13″ East.

THE FOLLOWING ITEMS ARE OF PARTICULAR IMPORTANCE:

1. No dirty ballast.
   Tankers with dirty ballast will be rejected and will have to tender a new Notice of Readiness upon second arrival.
2. No shore leave.
3. No crew changes.
   If emergency conditions prevail, for humanitarian reasons, exceptions to the foregoing may be permitted. All expenses incurred will be for ship's account.
4. No stores available.
5. No clinic is available.
6. The laws of Indonesia govern this Terminal and all personnel are urged to abide by them.
7. During daylight hours the Indonesian flag must be flown throughout the vessel's stay in port.
8. Ardjuna time is GMT plus 7 hours throughout the year.
9. No bunkers are available.
10. Pertamina Directorate of Shipping and Telecommunications Jakarta, handles all Agency matters for tankers.
11. The Unit of Currency is the Indonesian Rupiah.
    The rate of exchange varies from time to time. The Master can obtain the current exchange rate from the Agent.
12. There are no Consulates available at Ardjuna Marine Terminal. However, there are many Embassies and Consulates represented in Jakarta 59 nautical miles S.W. of the Terminal.
13. Language of the port is English and Indonesian.
14. Only authorised personnel or visitors are permitted on the Storage Barges and/or Export Tanker.
15. No fresh water is available.
16. No slop tanks are available.
17. The Crude Oil testing laboratory is equipped to perform the following tests:
    API Gravity, B.S. & W. and Pour Point.
    Any additional tests that may be required will be performed in Jakarta.
18. For convenience, mail for personnel on incoming tankers may be sent to the Jakarta Office of the Company for delivery to the tanker when it arrives at Ardjuna Marine Terminal. Except on an emergency basis, spare parts or other material will not be accepted for delivery to incoming tankers.

DOCUMENTS: The Harbour Master submits a Harbour Report Form for the Master to complete.

The Agent prepares the ship's documents check list form to check the validity of each document. These documents are: Certificate of Registry, Ship's Construction Certificate, Load Line Certificate, Life Safety Equipment Certificate, Safety Radio/Telephone/Telegraph Certificate; Cargo Gear Certificate; Derating Certificate or Exemption Certificate. This list is then delivered to the Harbour Master with the following documents attached: Last Port Clearance, Crew List approved by the Immigration Officer and light dues receipt if arriving from another Indonesian port. The Harbour Master issues a port clearance at departure provided clearance is also granted by the other governmental authorities. A Panamanian port clearance for Panamanian flag vessels is not required at Ardjuna.

The Immigration Officer requires 2 copies of the Crew List and will check the Ship's Articles and the passports of the crew. When these documents are found to be in order, and arrival clearance will be marked on the Crew List.

If arriving from another Indonesian port the Agent will sign a guarantee if the vessel cannot prove that light dues have been paid.

Documents such as Bills of Lading, Quality Certificate, Quantity Certificate, Dry Certificate/Ullage Report, Time Loading Report, Certificate of Origin, Cargo Manifest and Master's Receipt for Documents/Samples are prepared at Ardjuna Marine Terminal. When the tanker has been loaded, the documents shall be completed and be taken aboard the tanker for the Master's signature.

Signing of these Documents by the Master will take place at the same time final departure clearance formalities are being carried out.

Notes of Protest, if any, should be handed to the Mooring Master for further delivery to Atlantic Richfield Indonesia Inc., Jakarta. Please note that the Mooring Master will acknowledge receipt of the Note of Protest only and is not authorized to accept such letters.

Departure Procedure:

Prior to the vessel's departure, the Immigration Official requires 6 copies of the Crew List to be marked for *"Departure Immigration Clearance"*, and duly signed, it will be distributed as follows:

Master of the vessel	1 copy
Harbour Master	1 copy
Customs	1 copy
Pertamina Agent	1 copy
Immigration	2 copies
Total	6 copies

The Customs Official on duty will issue the Customs 5-B Form which serves as Customs Departure Clearance.

Upon presentation of the Crew List which is signed and marked for Departure Immigration Clearance and Customs Clearance, the Harbour Master will issue the *Port Clearance.*

Final Clearance formalities will be carried out aboard the tanker, either at the Export SBM or alongside the storage barge "Ardjuna Sakti" or in the Anchorage Area, as circumstances dictate.

Before leaving the Terminal Area, the Master should advise the Terminal, the vessel's ETA at destination through the Mooring Master.

PILOTAGE: Under normal weather conditions, if a tanker is scheduled to berth upon arrival, the Mooring Master will board such tanker in the close vicinity of the mooring area.

Tankers waiting to load shall wait their turn in the recommended anchorage area, and shall maintain radio-telephone contact with the Terminal using the International Marine Calling & Safety Channel 16, Freq. 156.800 mHz for Terminal instructions.

The Mooring Master will act on behalf of the company to sign acknowledgement of tankers' Notice of Readiness. Such notice wi not be accepted for a time earlier than:

(a) the Master has received the Mooring Master onboard or

(b) the tanker shall have dropped anchor within th recommended anchorage area, and has advised th Terminal the time of anchoring.

Exception to (a) and (b) will be if the tanker is within th anchorage area awaiting arrival of the Mooring Master and ha been requested by the Terminal not to anchor.

In this case N.O.R. will be accepted from the time the Termina requested the ship not to anchor.

The company reserves the right to decline to berth a specifi tanker if its condition or facilities are unsafe for berthing or loading even though the berth may be open to other tankers.

The decision of the Atlantic Richfield Indonesia Termina Superintendent or his designated alternate to berth or not to bert a vessel shall be final.

ANCHORAGE: For tankers requested to anchor, the recommended anchorage area is an area Northward from the Single Buo Moorings enclosed by a line drawn through the following positions

"A" Latitude 5° 51′ 35″ S. Longitude 107° 43′ 30″ E.
"B" Latitude 5° 50′ 05″ S. Longitude 107° 43′ 30″ E.
"C" Latitude 5° 50′ 05″ S. Longitude 107° 45′ 30″ E.
"D" Latitude 5° 51′ 35″ S. Longitude 107° 45′ 30″ E.

Prior to their arrival Masters of tankers should contact the Terminal for instructions concerning anchorage positions.

Under no circumstances should the export tanker enter the Restricted Area around the structures without a Mooring Maste aboard.

The attention of Masters is drawn to the existence of underwate pipe-lines in the Restricted Area.

NAVIGATION AIDS:

Approaches: Approach information can be obtained by radio from the terminal. Under normal weather conditions, if a tanker is scheduled to berth upon arrival, the Mooring Master will board such tanker in the close vicinity of the mooring area.

In addition to the single buoy mooring points for export tankers and the storage barges, various oil wells and production structures are located in the immediate vicinity and the areas extending East South and Westerly from the storage barges which constitute a hazard to navigation for mariners.

SBMs, storage barges and structures within Ardjuna Marine Terminal area display the following visual characteristics:

Export Single Buoy Moorings (Buoy No. 2 and No. 4): A white light flashing every second, visibility 5 miles, mounted on the rotating deck of each SBM. Buoy No. 4 is fitted with a rada reflector.

Storage Barges "Arco Ardjuna" and "Ardjuna Sakti": By day, the black ball as required by the Regulations for Preventing Collisions at sea. The 2 storage barges at night display the lights for tankers a anchor as required by the Regulations for Preventing Collisions a sea and are equipped with automatic fog signals at the bow and a the stern.

Each barge has a bell forward as required by the Collisior Regulations and gong aft, under the same rules. When visibility is restricted the Fog Signals are continuously sounded. The SBM tc which the "Arco Ardjuna" is moored, is fitted with a radar reflecto and a white light flashing every second visibility 5 miles. The charted SBM (SBM No. 1) shows a white light flashing every seconc visibility 5 miles.

The SBM to which "Ardjuna Sakti" is moored, shows a white ligh flashing alternately for a 3-second period and a 1-second perioc every 12 seconds, visibility 5 miles.

Crude Oil Production Platforms and Natural Gas Liquids Processing Facilities: There are 5 crude oil production platforms 16 well platforms, 1 junction platform, 1 natural gas processing facility platform and 1 quarters platform for the natural gas facility within the Ardjuna Marine Terminal area.

"B" (Bravo) flow station, situated approximately 0.5 of a mile South of the "Arco Ardjuna" Barge. Indicated as BB.

"E" (Echo) Flow Station, situated 12 nautical miles Eastward o Bravo. Indicated as platform EA.

"K" (Kilo) Flow Station, located 8 nautical miles S.S.W. of Bravo Indicated as platform KA.

"L" (Lima) Flow Station, situated 15 nautical miles West of Bravo Indicated as platform LA.

"U" (Uniform) Flow Station, located 13 nautical miles S.S.E. o Bravo. Indicated as platform UB.

"LNG" The natural gas facility and quarters platforms are joined by a bridge. Their position is:

Lat. 5° 54′ 36″ S., Long. 107° 44′ 01″ E.

In addition to the above specified obstructions and navigationa aids, all platforms display interrupted quick flashing white lights The storage barges, flow stations, LNG facility and quarters platforms will brightly illuminate the areas around them at nigh through the use of lights for normal working purposes.

MAX. SIZE: SBM No. 2 up to 100,000 d.w.t. (For Butane Liquids SBM No. 4 up to 200,000 d.w.t. Depth of water, approximately 132 ft below mean sea level.

RADIO: *Advice of arrival by cable or telex:* It is important tha incoming tankers advise Ardjuna Marine Terminal 72 hours before estimated time of arrival, giving the best estimate of ship's arrival a the Terminal, via:

Cable address: ARDJAK, Jakarta
Telex number: 011-44379, Jakarta.

Time to be used for ETA is "GOLF" Time Zone of GMT plus 7 hours throughout the year.

The first message should also include the following information:

1. Name of tanker and Radio Call Sign.
2. Cargo requirements.
3. De-ballast time. (Note: If a separate/permanent ballast system is fitted on board, ability of ship to load crude oil and discharge ballast simultaneously must be stated.)
4. Maximum loading rate.
5. Arrival draft, forward and aft.
6. Last Port of Call.
7. Confirm that vessel has clean Bill of Health.
8 If there is any sickness aboard, give whatever information is available as to the possible type of sickness.
9. If cholera inoculation or smallpox vaccination required. If so, number required.
10. Distance in feet from the bow to tanker's loading manifold.

Further ETA messages should be sent to Ardjuna Marine Terminal via above cable address and Telex Number when the tanker is 24 hours and 12 hours distant from the Terminal and any other time, if any appreciable change occurs in the original ETA or those subsequent thereto.

RADIO COMMUNICATIONS:

(1) VHF/FM Radio Telephone: (International Marine Calling & Safety Channel 16, Freq. 156.800 mHz).

Masters are recommended to use this system when they arrive within radio range of the Ardjuna Marine Terminal, particularly when approaching the port. If poor visibility exists the tanker's approach may not be observed. Attention to VHF communications may be the means of avoiding delay in berthing.

During berthing the ship's radio will be under the sole control of the Master, and the storage barge radios will be under the sole control of the Terminal Marine Superintendent or his assistant.

Masters are reminded that if tankers are requested to anchor to await berthing, it is their responsibility to maintain constant listening watch on VHF Channel 16 to receive Terminal instructions.

Any delay due to failure to maintain a constant listening watch on Channel 16 will be for the ship's account, and will not be included in Lay Time calculation.

The Ardjuna Marine Terminal is equipped with VHF/FM Radio Telephone Sets and continuous watch is maintained on Channel 16 (Freq. 156.800 mHz) and Frequency 157.725 mHz.

Tankers approaching the Terminal should make initial contact on Channel 16. For subsequent inter-ship communications within the Terminal a "Walkie Talkie" Radio Freq. 157.725 mHz will be used by the Mooring Master.

This frequency will not be used for general purpose, unless clearance is obtained by the Terminal. This is required for safety reasons.

Should all radios on the tanker become inoperative, the emergency signal i.e. continuous blasts on the ship's whistle will be sounded to notify the Terminal of the radio failures. Upon hearing this signal from a loading tanker the storage barges will immediately stop loading to the Export Tanker until communications have again been established.

(2) High Frequency Single Side Band Radio Telephone: A voice message from incoming tankers may be relayed by HF/SSB. Atlantic Richfield Indonesia Inc., located in Jakarta, Indonesia, is inter-connected to the Ardjuna Marine Terminal via local communications system and maintain a continuous watch on HF Frequency 7320 kHz (Upper Side Band A3J Mode, 100 Watts, Vertical Whip Antenna, Call Sign 8GJ9).

(3) *Pertamina Control Radio Stations — HF/SSB:* In the event incoming tankers are not able to contact the Ardjuna Marine Terminal on the foregoing VHF/FM Frequencies, or by HF/SSB, Pertamina maintains coastal radio stations located in Jakarta and Merak.

Pertamina Jakarta Radio, Call Sign PKI 2 may be contacted on HF/SSB per following frequencies and during the following service hours:

Frequency/kHz	*Hours/GMT*			*Keep Watch/kHz*
452	0000–2400			500
8626	0200–0400, 1000–1200,	0500–0600, 1400–1500,	0700–0800, 1700–2000,	8363.2–8364.8
12980	0000–0200, 1200–1400,	0400–0500, 1600–1700,	0800–1000, 2000–2200,	12544.8–12547.2 12559.2–12560.4
4419.4 4425.6	0100–0400, 1300–1500,	0700–0900, 1800–2000	1000–1100,	4125.0 & 4131.2
6512.6 6521.9	0000–0100, 1200–1400,	0300–0400, 1800–2000	0600–0700,	6215.5 & 6202.2
8759.2	0100–0300, 1100–1200,	0400–0500, 1500–1600	0700–0800,	
VHF CH. 9/16/19	0000–2400			CH. 16

Pertamina Merak Radio, Call Sign PKQ may be contacted on HF/SSB per following frequencies and during the following service hours:

Frequency/kHz	*Hours/GMT*			*Keep Watch/kHZ*
452/500	0000–1600			500
8626	0100–0200, 1500–1600	0900–1000,		8363.2–8364.8 8372.8–8373.6
4419.4, 4425.6	0000–0100,	1200–1400		4125.0, 4131.2
6512.6, 6521.9	0200–0300,	0400–0500,	0800–0900	6206.2, 6215.5
VHF CH. 9/16/19	0000–2400			CH. 16

Masters should request the Pertamina Coastal Radio Station to relay the necessary information to Atlantic Richfield Indonesia Inc., Jakarta by telephone numbers:
584214, 584121, 584122, 584123, 584124, 584125, 584126, 584359, 584360 by Pertamina Internal Telex System number 18 which is the designated number of Atlantic Richfield Indonesia Inc., Jakarta.

HEALTH: In accordance with practice in Indonesian ports, quarantine, immigration, pilot and call sign flags must be displayed by all vessels approaching Ardjuna. These signals shall be displayed continuously until clearance is granted. The signals are as follows: Sunrise to sunset: quarantine flag "Q". Sunset to sunrise: signal lights (red over white).

The "N" flag should be flown until the Immigration Officer boards the ship. The "G" flag (request for Pilot) should be flown until the Mooring Master boards. The vessel should also fly its call sign. As soon as the Mooring Master boards, the "G" flag should be replaced by the "H" flag which signifies that the Pilot is aboard. The tanker may fly the "P" flag if it is going to sail within 24 hours.

Indonesian Immigration, Customs and Harbour Master officials will board the vessel after arrival to grant clearance.

Each tanker entering the port of Ardjuna must have requested and been granted Flag Dispensation prior to its arrival. At the same time, application is made for Provisional Pratique through the Directorate of Quarantine and, if granted, a cable advice is sent to the harbour authorities.

Port Health Clearance is issued prior to the tanker's arrival and is also valid for departure clearance.

If Provisional Pratique is not granted a Port Health Officer will be provided. All of the foregoing is arranged through and by the Agent.

Each Crew member should be in possession of an International Vaccination Card.

After the tanker is all secured, the Customs Officer will seal the stores. If arriving from a foreign port, the Agent will prepare the General Cargo Declaration form stating the cargo onboard the tanker and attaching appropriate shipping documents. If the tanker is arriving from an Indonesian port, the 5-B form issued at the last Indonesian port will be retained by Customs and the arrival clearance at Ardjuna is granted.

TUGS: 1 tug to assist berthing and unberthing. A mooring launch will be available to pass line to the storage tanker on berthing.

The following mooring Launches will be available for running lines as required, also for transporting Government Officials, Agents and other authorised personnel to and from the export tanker.

Name and description	*Length*	*Rated HP*
(1) *Arco Ardjuna III*	40 ft.	260
(2) *Arco Ardjuna IV*	40 ft.	260

TERMINAL FACILITIES: For Crude Oil Tankers:

Export SBM No. 4 is designed, during reasonable weather conditions, to handle tankers up to 200,000 d.w.t., and is equipped with dual 160 ft./15 in. circumference floating braidline mooring ropes with 22 ft. long anti-chafe chains fitted, so arranged as to avoid chafe to the mooring ropes while tankers are at the buoy. The other export SBM No. 2 is designed to handle tankers up to 100,000 d.w.t., weather permitting, and is equipped with dual 150 ft./12 in. circumference floating braidline mooring ropes together with anti-chafe chains, length 22 ft. Presently this buoy is prepared to service tankers loading butane.

The crude oil loading hoses are connected to the ship's manifold on the port side of the Export Tanker. Tankers arriving are requested to have the derrick on the port side raised and rigged, ready to lift aboard the Terminal equipment.

Crude oil tankers are loaded through 2 strings of 16 in. I.D. floating hoses extending from the Export SBM No. 4, connected to the tanker's manifold at the ends by means of the rail hoses of 12 in. I.D. All crude oil tankers not having 12 in. hose connection should provide their own reducers in such a way as not to cause any delay in the hose connecting operation. On SBM No. 4 the length of the hose strings is 795 ft.

For crude oil tankers intending to load in the Ardjuna Marine Terminal, the distance from the bow to the loading manifold should not exceed 450 ft.

The minimum loading rate at the Ardjuna Marine Terminal for crude oil tankers is 15,000 bbls per hour. Any tanker arriving unable to receive crude oil at the above rate may be rejected. Tankers loading crude oil on the SBM No. 4 can accomplish a maximum loading rate of approximately 35,000 bbls per hour.

In order to save time as well as to make the berth available for others, it is requested that ships receive crude oil as fast as it can be delivered, with due regard for safety.

Masters are reminded that for safety reasons, it is advisable to have the ship half loaded as quickly as possible. Rate can be reduced for topping off tanks. When requested by the ship to stop, cessation of crude oil flow is almost immediate.

Storage Barge "Arco Ardjuna": The company marine administrative offices, storage and laboratory for testing crude oil stock are located on board a 137,673 tons d.w.t. Storage barge of Liberian Registry designated "Arco Ardjuna".

Overall length of the barge is 467 ft. and 10 in. Total crude oil capacity is 1,022,000 gross barrels, for the Arco Ardjuna plus approximately 1,000,000 gross barrels for the chartered crude oil storage tanker.

Loading of crude oil from the storage barge to the tankers will be through A.O. Smith Positive Displacement Meters, of which there are four, each having a maximum capacity of 12,500 bbls per hour. "Arco Ardjuna" barge is moored on the SBM No. 3, Lat. 5° 54′ 10.6″ South and Long. 107° 43′ 45″ East.

Chartered Crude Oil Storage Tanker: The storage tanker is located at mooring SBM No. 1, the position of which is Lat. 5° 54′ 15″ South and Long. 107° 44′ 22″ East.

Ardjuna crude oil of approximately 39.0° API at 60°F. is available from the above storage tanker, by transfer through the Arco Ardjuna metering system.

For LPG Refrigerated Vessels:
Storage Barge "Ardjuna Sakti":

1. The LPG storage facility is a prestressed concrete barge, measuring 461 ft. in length, 136 ft. in width and having a depth of 56.4 ft.
   The barge carries 12 tanks each of which has a capacity of 31,528 barrels giving a total of 378,336 barrels.
   A pumping rate of 20,000 bbls (1,600 metric tons) per hour can be achieved. The following operating rules have been adopted which shall apply to the lifting of products from the "Ardjuna Sakti".
2. Refrigerated LPG vessels *will not be considered ready for loading* at Ardjuna Marine Terminal *unless and until all LPG tanks contain LPG vapours and are cooled down sufficiently* to permit loading of products nominated.
3. Vessels receiving fully refrigerated products will only be acceptable for loading provided they are capable of receiving the products at their boiling points at 0.5-2.5 p.s.i.g. Such vessels must have a refrigeration system capable of liquefying all vapours coming from vessels tanks resulting from loading at the maximum rate of 20,000 bbls per hour, and including those vapours formed as a result of heat gained by the vessel's tanks.
4. The "Ardjuna Sakti" is equipped with a vapour compressor and condensing facilities for liquefying vapours, however, no liability of any kind whatsoever, to provide the compressor and or condensing facilities for vessels use is accepted.
5. Provided a vessel has the capabilities described in paragraph (3), at the sole discretion of the Terminal Superintendent or his designated representative, in the event the vessel has difficulties with her refrigeration system, the facilities available on the "Ardjuna Sakti" may be made available to assist the vessel, provided they are operational. There is *no obligation* implied or accepted to continue to assist the vessel with chill down, even if assistance is commenced. In the event that assistance is requested and is provided all charges and expenses incurred shall be paid for by the consignee. Such charges shall include any amount payable in demurrage for all the time that chill down operations causes the vessel to exceed the allowed laytime. The conditions set out in this paragraph (5) for assisting in chill down operations shall apply to purging operations.
6. Ardjuna Marine Terminal has no facilities for inerting arriving LPG tankers. It is imperative that arriving vessels do not arrive with tanks designated to receive product "in air". Vessels arriving to load LPG will not be accepted for loading product if the oxygen in the tanks exceeds 8.0 mole per cent.
7. Loading lines and vapour return lines at the Ardjuna Marine Terminal are fitted with quick release Camlock flanges which are 12 in. ASA 150. Arriving vessels must be able to connect to these flanges. The terminal will have a limited number of spool pieces and reducers available but will accept no obligation or liability to provide them. It is the vessel's responsibility to provide a connection suitable to connect with the Camlock flanges described above. Failure of the loading vessel to present the required 12 in. ASA 150 flange for connection will result in rejection of the vessel for loading and cancellation of her Notice of Readiness. All costs, charges and expenses incurred due to rejection will be for vessel's account.

Should it be necessary to assist a ship with the use of the terminal ship vapour compressor a charge of US$250 will be made for each hour or part of an hour that the terminal ship vapour pressure is used by the ship.

MOORING/LOADING/UNMOORING: The Ardjuna Marine Terminal will operate 24 hours a day, 7 days a week. Tankers will normally be berthed during daylight hours, weather and other circumstances permitting. In special circumstances at the sole discretion of the Company Terminal Superintendent night berthing may be allowed if all conditions are favourable. Unmooring will be carried out at any hour.

Tankers to be moored or manoeuvred at the Ardjuna Marine Terminal will be boarded by the Company Mooring Master within the anchorage area.

Under normal weather conditions if a tanker is scheduled to berth on arrival, the Mooring Master will board such vessel in the close vicinity of the mooring area.

All such manoeuvring of ships shall be done only in accordance with the advice of the Mooring Master, subject to the understanding that in all cases and circumstances the Master of the tanker being manoeuvred shall remain solely responsible on behalf of his vessel's owners for the safety and proper manoeuvring of his vessel.

The ship's Master, or one of his *designated and qualified deck officers, must* be on the navigating bridge at all times while the vessel is being manoeuvred.

The Mooring Master will report unsatisfactory conditions to the company Terminal Superintendent who may in turn, reject the tanker until corrections are fully made. All costs accruing therefrom will be for the vessel's account. The services of the Mooring Master are provided upon the express understanding and conditions that when any Mooring Master provided goes on board a vessel for the purpose of assisting such vessel, he becomes for such purpose the servant of the owners of the vessel and the company shall not be liable for any damage, or injury resulting from any advice, or assistance, or actions directed, or made, by such Mooring Master while on, or in the vicinity of the assisted vessel.

The tanker's cargo tanks are to be inspected by the Mooring

Master, and if suitable for loading crude oil, a signed notation to this effect will be made on the company Dry Certificate.

The Company Terminal Superintendent, or his designated alternate, shall be the sole authority to decide when the port is closed due to unsuitable weather conditions preventing normal working operations.

Various combinations of wind, sea, and tidal conditions also the size, length, ballasted trim, and handling qualities of a vessel can affect the decision to berth a vessel at Ardjuna Marine Terminal. All these factors have to be evaluated before a final berthing decision is made.

Delays to vessels using Ardjuna Marine Terminal due to the port being closed because of bad weather conditions shall not be computed as used lay time when compiling vessel's turn around time.

Request for the terminal to stop the flow of oil at a predetermined tonnage must be in writing. The request must include the statement by the ship's Master, that the company will not be held responsible for any error and that in case of the vessel being overloaded the excess cargo cannot be pumped back to the storage barge. The ship's Master will also be held responsible for any oil spills caused by this request.

The ship's Master is responsible to ensure that no communication by radio is allowed within the terminal area.

Unauthorised radio communications will be cause for cessation of all operations, except clearing of the berth, and the vessel's Notice of Readiness will be immediately nullified.

The Master of each tanker will be given a copy of the Conditions of Use of Port of Ardjuna Marine Terminal which he will be required to sign before the vessel proceeds to berth.

The vessel's personnel are responsible for the safety of the vessel and must take all necessary precautions, whether or not so advised by the Mooring Master, having in mind the hazards of the operation because of the products being handled, weather conditions and any other circumstances requiring special care or caution.

Ships are requested to have a pilot ladder safely and securely rigged, ready for immediate use, and long enough to reach the Mooring Master's launch.

A combination of pilot ladder and ship's accommodation ladder, so arranged that the personnel can first use the pilot ladder until part way up the vessel's side, and then transfer to the accommodation ladder is recommended, especially on very large tankers. A light line should be ready to take aboard the Mooring Master's equipment.

Tankers will provide a broad lee for the Mooring Master both when boarding and leaving the ship. Adequate explosion proof lighting at night must be provided near the pilot ladder, and manifold connection area. During loading overside lighting must be provided in the vicinity of sea valves and floating hoses.

During a crude oil tanker's stay at the Export SBM, emergency towing wires shall at all times be hung over the ship's stern on each quarter of the vessel. These wires shall be secured on the bollards inboard to enable the vessel to be towed away should the need arise. They must be tended throughout to keep the eye of the wire not more than 2 ft. above the water.

Before any crude is loaded all ship's scuppers on main decks must be plugged and cemented oil tight. Approved mechanical means of closing scuppers may be accepted.

It is absolutely essential that extremely careful supervision be exercised by officers of all tankers while loading operations are in progress. A responsible ship's officer is required to be on duty continuously while the tanker is being loaded. He will be assisted by an adequate number of ship's personnel in these operations.

It is the responsibility of the vessel to ensure that all mooring lines are properly tended on crude oil tankers. The Mooring Master at any time, may direct an additional ship's line to be secured to the buoy and this line to be hove up or slackened off under the supervision of a responsible ship's officer so as to prevent the vessel overriding the buoy. *At all times sufficient crew must be available* to carry out under the supervision of a responsible officer, instructions given by the Mooring Master.

Masters of crude oil tankers are advised that raising, lowering, connecting and disconnecting of oil loading hoses as well as other labours and duties on shipboard connected with the loading of cargo or maintaining mooring lines in a correct manner will be performed *by the ship's crew directed by a responsible officer* as required by the Mooring Master. Loading of crude oil tankers is through 2×12 in. I.D. hoses with 150 ASA flange rating. The weight of each hose is approximately 2.5 tons. All tankers loading crude oil at Ardjuna Marine Terminal must be able to connect their manifolds to the 12 in. hoses. Masters are strongly reminded, it is the ship's responsibility to provide reducers to make the connection, if the ship's manifold is not 12 in.

Preparations for mooring will be advised by the terminal through VHF communication prior to tanker's arrival or by the Mooring Master before the mooring operation commences.

Crude oil tankers are required to have ready:

1. On the portside: a derrick of at least 5 tons safe working load, rigged, and ready to pick up the mooring and hose connecting gear from the Mooring Master's launch.

   This derrick subsequently will be used for raising, connecting, disconnecting and lowering loading hoses and eventually to transfer the mooring and hose connecting gear back to the launch before the tanker sails.
2. On the forecastle: at least 6 good ship's mooring lines shall be required. Two of them will be used as messenger lines for bringing aboard both terminal mooring lines from the SBM.

   The 4 remaining ship's lines will be laid out 2 and 2 on either side of the foc'sle deck, eyes about 3.5 m. distant from the fairleads as advised by the Mooring Master. When the terminal mooring lines have been hove up and anti-chafe chains have been hove about halfway inboard through the fairleads, the eyes of the ship's lines will be shackled onto the end links of the chain, so arranged that in the final position of mooring, the tanker is tied to the SBM using the terminal mooring lines/chains and made fast to the ship's bollards by means of the ship's own lines. This will be backed up by 2 lengths of wire strops each 30 ft. in length and 2 in. diameter.

   These wires will be provided by the terminal to be used as preventer wires. These 2 wire strops will not be used as the permanent mooring system.

Their purpose is to hold the ship safely moored in the event one or more of the ships lines part until the crew can replace such lines.

Refrigerated LPG tankers will berth alongside the starboard side of the LPG storage barge "Ardjuna Sakti". The "Ardjuna Sakti" is secured to a rigid arm single buoy mooring system which allows the storage barge to rotate according to direction of wind and tide. There are 4 large Yokohama type rubber fenders aboard the storage barge which are supported on davits. The fenders are lowered to the water prior to the berthing operation. Each fender is 6.5 m. in length the diameter of the fenders is 3.3 m. Line running launches are available to pass the mooring lines between the barge and the ship.

When secured in position the moorings will be as follows:

5 lines on the forecastle.
4 lines on the poop.
2 springs on the maindeck forward leading aft.
2 springs on the maindeck aft leading forward.

Each LPG tanker loading at Ardjuna Marine Terminal will be required to provide the above ropes. Where tension winches are available they will only be used if they can be locked in a fixed position.

EQUIPMENT: A ship may be rejected if, upon inspection, it is not properly equipped, or if it is not suitably manned, or tanks unsuitable for the cargo, or if in the case of crude oil tankers the ballast is dirty.

A vessel is suitably manned if it has a full complement of qualified officers and a crew all of whom are in a sober condition, competent and willing to carry out their duties and orders.

A ship must be equipped with a good working propulsion unit as passed by the appropriate survey society. Inoperative ships or partly inoperative ships will be rejected. Should a ship become inoperative or partly inoperative while berthed alongside the storage barge "Ardjuna Sakti" or while secured to a crude oil export single buoy mooring, it will be removed at the ship's expense.

No repairs to main engines or other essential equipment or machinery while alongside the storage barge "Ardjuna Sakti" or while secured to an export SBM may be carried out, unless with the permission of the Terminal Superintendent or his designated alternate.

Crude oil tankers must lift the export hoses from the water to connect with the ship's manifold by means of its *own derricks and using its own crew*.

A vessel must have both bow anchors in good working condition. Both bow anchors and anchor cable must be of a size and standard to meet either "Lloyds" or "A.B.S." requirements, even though they may in fact, be classified by other societies.

All vessels must have ready on deck suitable stoppers for manila, synthetic lines and wires used for mooring purposes.

All vessels must have suitable winches or capstans in good working order.

Such winches or capstans must have sufficient power to heave the ship to the position required by the Terminal Mooring Master. Crude oil tankers must have the capacity to heave on the 12 in. and 15 in. braid lines used to secure them to the export SBMs. Power supply to all deck machinery must be maintained throughout the period the ship is secured alongside the storage barge "Ardjuna Sakti" or to the export SBM. Failure to comply with this requirement will result in cessation of loading and delay, and expense so caused will be for the ship's account.

To assist in vessel's turn around, ships should have all necessary gear ready on arrival. Crude oil tankers must have the cargo boom on the port side raised with the cargo gear rigged and ready before the ship is boarded by the Mooring Master.

Vessels which may consider the lifting capacity of their gear to be marginal should strengthen their gear accordingly. A common way to do so is to rig a second topping lift on the boom.

Masters of crude oil tankers are reminded that the hose connecting operation will normally be carried out while the ship is deballasting.

The cargo derrick required to raise the hose from the water, must have a sufficient length of strong lifting wire rope on the winch drum to enable the cargo hook to reach the water and still have adequate turns of wire left on the drum to ensure safety.

BALLAST: Owners and Masters are responsible to observe International Convention Laws and Indonesia Government Regulations concerning pollution of the sea, having particular regard for this area of the Java Sea.

No facilities are available for disposal of dirty ballast. It is the responsibility of the ship's Master to see that no oil of any kind is pumped or spilled overboard from his ship.

The categories of pollution include oily water from bilges, crude residual from previous voyages, or any other matter that may result in pollution of the sea. Any fines imposed shall be for ship's account.

As soon as practical after arrival, all tankers will be inspected by an Ardjuna Marine Terminal Official for dirty ballast. During discharge of ballast, similar inspections will continue.

If evidence of oil appears at any of these inspections, the ship will be rejected, and will not be accepted again until satisfactory evidence is produced that such ballast was disposed of in a proper manner. If, during inspection, or during progress of loading, it is revealed that the ship's tanks are not tight, or that oil is leaking from the ship, the ship may be rejected or refused further loading.

If the ship's tanks are found to be leaking, it will not be accepted for loading unless satisfactory evidence of repair duly certified by Lloyd's or A.B.S. Surveyors, or other recognised Surveyors is submitted. It is the responsibility of the ship's Master to see that no oil of any kind is pumped or spilled overboard from his ship. Drip pans, sawdust, dispersant etc. should be used at all times especially when disconnecting hoses in order to avoid any spillage of oil overboard.

Any tanker rejected because of dirty ballast or sea pollution will automatically nullify his Notice of Readiness and will lose any priority of position for loading.

A tanker must have sufficient ballast for safe handling having due regard to existing weather and sea conditions. Through a careful watch of the weather and sea conditions, frequent exchange of information between ship and terminal, and by a knowledge of the behaviour of his own ship, a ship's Master may come to the terminal with a minimum safe ballast and thus lessen any possibility of infringement of sea pollution regulations.

In addition to the lights usually displayed, vessels in the moorings discharging ballast or loading cargo during darkness will brilliantly illuminate the sea around the ship, so that any pollution will be noticeable.

Tankers equipped with a separate system of ballast tanks will be allowed to discharge ballast, and load oil simultaneously, providing approval is first obtained from the company Terminal Superintendent or his alternate.

Most responsible ship owners have adopted a system of tank cleaning using circulatory methods of transfer of tank washings on shipboard and treating these washings with chemicals.

The result is that no oil is discharged into the sea and the oil separated is collected in a slop tank. With the written permission of lifting companies, the terminal will load on top of such slops. This system is highly recommended to avoid pollution of the Java Sea.

Masters are required to certify in writing the quantity of slops remaining on board (if any). If they intend to load crude oil on top of the slops, it must be clearly stated. The Mooring Master will confirm the amount stated in writing by ullaging and calculating the slops to ensure the amount declared is correct.

Provided agreement is reached on the amount of slops the Mooring Master will confirm the amount of slops on the Dry Certificate.

Note: Separate "Slop Certificate" signed by Chief Officer and witnessed by the Mooring Master is required to substantiate calculation.

Masters are warned that inspection of ballast is strict.

If, at any time an overflow of crude oil occurs, loading will be suspended immediately and not be resumed until the oil is cleaned up and removed from the decks of the vessel and/or from the surface of the sea, and any damage is repaired and no further danger exists. It is stressed that during loading operations, the Ardjuna Cargo Supervisor will immediately slow down the loading rate on receipt of a request for same from the ship's deck officer – in charge of loading.

All spillages of oil must be reported immediately to the Ardjuna Terminal Superintendent, or his alternate, and subsequently a detailed report in writing submitted by the Master of the vessel concerned giving all relevant details.

FRESH WATER: No fresh water is available.

FUEL: No bunkers are available.

MEDICAL: No clinic is available.

CONSULS: There are no consulates available at Ardjuna Terminal. However, there are many embassies and consulates represented in Jakarta about 59 miles S.W. of the Terminal.

CUSTOMS ALLOWANCES: Cigarettes, cigars, tobacco, matches, spirits, wines, beers, perfume, arms, ammunition and possibly other items have to be locked up under Customs' seal from time of arrival of ship in port until time of leaving territorial waters. Each person is allowed to bring in 200 cigarettes or the equivalent in grams of tobacco or cigars.

Special allowances are made for the Master under special circumstances.

REPATRIATION: No crew changes. If emergency conditions prevail, for humanitarian reasons exceptions to the foregoing may be permitted. All expenses incurred will be for ship's account.

TIME: Ardjuna time is GMT plus 7 hours throughout the year.

SHORE LEAVE: Not allowed.

SAFETY/FIRE REGULATIONS: Safety and Fire Regulations will be strictly adhered to.

The notice "Instructions In Case Of Fire", and the notice "Safety And Fire Regulations" must be posted in prominent positions on board the export tanker by the Master, or by his designated alternate.

The Safety Check List must be jointly completed by a ship's officer designated by the Master, together with the Terminal Marine Supervisor/Mooring Master. After completing and signing the Check List both the ship's officer and Marine Supervisor/Mooring Master will retain copies.

Terminal Safety and Fire Inspections: It is the duty of the Mooring Master to make periodical inspections on board vessels in respect of any breach of the Terminal Safety and Fire Regulations.

For this purpose he must be allowed free access to all parts of the vessel at all times and must be accompanied by a responsible ship's officer to assist him in carrying out such inspections. The Mooring Master will advise the ship's Master when he wishes to make a safety inspection. It is the responsibility of the ship's Master to ensure that the Mooring Master is given every assistance to carry out this duty.

AGENCY:

General Agent: Pertamina Directorate of Shipping and Telecommunication, 32–34, Jalan Yos Sudarso, PO Box 327, Jakarta – Indonesia. Cable Address: Pertaminaship Jakarta. Telephone: 690312 – 690322 (11 lines), extensions 225–315. Telex number: 42885.

Procedure for appointing Agent: Owners should telex or cable appointment of Pertaminaship as General Agent to attend the vessel at Ardjuna Marine Terminal and telex/cable should be sent 1 week prior to vessel's arrival.

The following information should also be given in the telex or cable to enable the General Agent to obtain Flag Dispensation for the vessel:

1. Name of vessel
2. Flag
3. Port of Registry
4. Certificate of Registration Number
5. Name of Master
6. Number of Crew
7. Last Port of Call
8. ETA Ardjuna Marine Terminal
9. Indonesian Ports of Call

Advance Payment: The tanker Owner or Charterer must comply with the Procedure for appointing Agent as mentioned above.

Pertamina Directorate of Shipping and Telecommunication will acknowledge receipt of cable appointment, and will request an advance deposit of US$4,000 to US$10,000 – depending on the size of vessel, to cover the above Port Charges.

Advance payment for government charges should be made payable to:

"Pertamina Agency"
Account No. 11.51.006.000.005
Bank Negara Indonesia
Cabang Gambir
Jalan Kebon Sirih 77A
Jakarta, Indonesia.

To facilitate handling preparation, Owners/Charterers are required to telex "Pertamina Directorate of Shipping & Telecommunications" advising Telegram Transfer (T.T.) Number, the name of vessel and the port(s) of call. Telex number: 42885.

In those instances where payment exceeds the actual port charges, the balance will be credited to the Owners/Charters account or remitted by the Agent.

Neither the Agent nor Atlantic Richfield Indonesia, Inc., will be responsible for demurrage or other charges resulting from failure to prearrange obligations in this manner.

OPERATOR: Atlantic Richfield Indonesia Inc.

Principal Offices:

Pertamina Head Office: Jalan Medan Merdeka Timur No. 1, Jakarta, Indonesia.

Atlantic Richfield Indonesia Inc.: Gedung Veteran R.I., Jalan Jenderal Soedirman, PO Box 63/JKT, Jakarta, Indonesia.

Atlantic Richfield Company: International Division, Arco Plaza, 515 South Flower Street, Los Angeles, California 90071.

Carver – Dodge Oil Company: Division of Reading & Bates, Offshore Drilling Company, 3800, First Place, Tulsa, Oklahoma 74103.

Independent Indonesian American Petroleum Company: Division of Natomas International Corporation, Jalan Letjen. M.T. Haryono 58, PO Box 2759 Jakarta, Indonesia.

Independent Indonesian American Petroleum Company: Division of Natomas International Corporation, 5251 Westheimer, Suite 700, Houston, Texas 77056, U.S.A.

Tidewater N.W. Java, Inc.: 1440 Canal Street, Suite 2100, New Orleans, La. 70112, U.S.A.

Warrior Minyak Inc.: 1776 Lincoln St., Suite 80, Denver, Colorado 80203, U.S.A.

Nominations: Tanker nominations for liftings of either Ardjuna crude oil or liquefied natural gas are co-ordinated through Atlantic Richfield Company, Los Angeles, California and Atlantic Richfield Indonesia Inc., Jakarta.

All crude oil and liquefied natural gas sales, also tanker chartering are arranged by the following parties in each of their respective locations. Pertamina, Atlantic Richfield Company, Carver Dodge Oil Company, Independent Indonesian American Petroleum Company, Natomas Company, Tide Water N.W. Java Inc. and Warrior Minyak Inc.

Tanker scheduling is co-ordinated for all of the partners through Atlantic Richfield Company, Los Angeles, California and arranged through Atlantic Richfield Indonesia Inc., Jakarta.

BALIKPAPAN: 01.13 S. 117.00 E.

DOCUMENTS: Upon arrival vessels have to produce the following Certificates and Documents, which will remain in the Harbour Master's custody until cleared:

Nationality (Registry) Certificate.
Seaworthiness Certificate.
Measurement (Tonnage) Certificate.
Deratisation (Exemption) Certificate.
International Loading Line Certificate.
Safety Certificate (passengers ships).
Safety Equipment Certificate (cargo ships).
Safety Radio and Radiotelephony Certificate (cargo ships).
Certificate of Approval (ship's radio station).
Health Book or Bill of Health.
Last Port Clearance.
Subscription of Light and Harbour Dues and wharfage if any.
10 Crew Lists and Passenger's Lists.
Ship's Articles.
2 Stores Lists.

PILOTAGE: Compulsory pilotage. Application for Pilots can be made via Radio Station or the Signal Station on Tokong Hill. Vessels arriving by night should anchor off the outer buoy and give their call sign to the Signal Station. Pilot boards in position 1° 19′ 30″ S. 116° 54′ 30″ E. Vessels leaving should order a Pilot at least 6 hours prior to departure and when leaving between 0600–1200 hrs. application should be made before 2000 hrs. the preceding day. If vessel's draft exceeds 70 dm. same should be mentioned in the pilot's cable application.

APPROACH: The surrounding land is in general low with few conspicuous hill rows as background. Only the high spit on which Balikpapan is built can be used as a landmark with the regular cone-shaped hill Tokong.

RESTRICTIONS: Mooring and unmooring is restricted to daylight hours only.

MAX. SIZE: Tankers: Shell normally permit max. LOA of 750 ft. Drafts are restricted by the bar where the depth below chart datum is 25 ft. 3 in. Minimum keel clearance required is 1 ft. 3 in. Sailing drafts depending on rise of tide up to a max. of 33 ft. salt water.

HEALTH: Vessels arriving from abroad have to apply well in advance from the Department of Health (Quarantine Section) for provisional free pratique, as said pratique has to be cabled to the port concerned. The provisional free pratique is only valid for the port concerned, the next port of call must be a First Class Port as no further provisional free pratique will be issued, unless the vessel sails directly abroad.

TUGS: One small tug is available.

BERTHING: Dry-cargo jetty 1: berth length: 240 m. with depths alongside 75 dm. at LWS. Combination dry cargo and oil: berth length: 300m. depth 75 dm. at LWS.

TANKERS: Jetties 3, 4, 5, 6, 7 and 8 are oil berths. When alongside vessels should keep 2 wires ready over the water-side so that vessels can be towed away in case of emergency.

STEVEDORES: Working hours: 0700–2000 Monday–Friday. 0700–1500 Saturdays. 0700–1500 overtime if required.

FRESH WATER: Available in limited quantity.

FUEL: Available at the berth 200 t.p.h. Coal not available.

PORT SECURITY: Maintained by members of the Indonesian Armed Services, usually, Police, Navy or Marine and Army. Crew members should be in possession of a shore-pass issued by the Port Authority, accompanied by an identification card when leaving or entering the guarded gates of the Port Area. Shore passes can be obtained via the Agencies.

CUSTOMS: It is strictly prohibited to take undeclared foreign currency ashore. Crew members are not allowed to take more than Rp. 50. – (fifty Rupiahs only) ashore. It is recommended that Masters consult the Agents with the local prevailing Customs with regard to currency, cigarettes, spirits, etc., to prevent unnecessary difficulties and eventually fines.

AUTHORITY: Department of Sea Communications.

BANYUWANGI: 08.13 S. 114.23 E.

OLD PORT NOW PRACTICALLY CLOSED FOR SHIPS.
(OPENED FOR BOATS AND FISHING BOATS ONLY).

DOCUMENTS: Customs and Harbour Master requires:

Crew List.
Passenger List.
Customs Documents.
Health Certificate.
Port Clearance.
Harbour Report.
Derat. Certificate.
Radio Certificate.
Certificate of Registry.
Perfection Certificate.

PILOTAGE: Not necessary because anchorage open.

ANCHORAGE: Position: Lat. 8° 12′ S. Long. 114° 23′ 16″ E. Depth 25–30 m.

MAX. SIZE: No restrictions, vessels must be anchored outside harbour.

HEALTH: All vessels boarded by Harbour Quarantine on arrival.

RADIO: None, moved to Meneng Port.

TUGS: 2 tug boats belong to P.T. Jakarta Lloyd Banyuwangi Branch.

BERTHING: Distance 500 to 750 m. from lighthouse. Anchorage berths only.

STEVEDORES: 6 gangs available. P.T. Jakarta Lloyd Banyuwangi Branch. 1 gang consists of 13 labourers, 1 gang boss, 1 tallyman, 2 winch drivers, 1 commander.

MEDICAL: Arranged by Department of Health.

FRESH WATER: None available.

FUEL: None available.

GANGWAY/DECK WATCHMEN: None available from shore.

OPENING/CLOSING HATCHES: Arranged by stevedores.

CUSTOMS ALLOWANCES: 50 cigarettes each Crew member. Packs or tins of tobacco must be open before going ashore. Wine and/or spirits: Enough for own use, if more required must pay import duties.

CARGO GEAR: Ship's gear used. Cargo loading on board by lighter.

IDENTIFICATION CARDS: Required.

CONSULS: No local representation.

REPAIRS: No facilities.

REPATRIATION: Not possible.

TIME: GMT plus 7 hours.

HOLIDAYS: On Sundays and holidays no work available, but if necessary, work can be arranged. No work when raining.

POLICE/FIRE/AMBULANCE: Police and ambulance available. Fire brigades belong to District and Paper Mill. Phone Nos. 352, 653, 353 and 503.

TELEPHONES: No facilities for placing telephones on board.

SHORE LEAVE: Allowed.

DELAYS: Possible. During loading if it rains.

AUTHORITY: Kepala Pelabuhan (Port Administration).

BANYUWANGI (Port Meneng): 08.07 S. 114.23 E.

NEW PORT FOR LARGE VESSELS.

DOCUMENTS: Customs and Harbour Master require:

Crew List.
Passenger List.
Custom Documents.
Health Certificate.
Port Clearance.
Harbour Report.
Deratisation Certificate.
Radio Certificate.
Certificate of Registry.
Perfection Certificate.

PILOTAGE: Compulsory pilotage for vessels over 5,000 gross tons. Pilots must be ordered by respective Agent at least 48 hours in advance of the time their service is required.

MAX. SIZE: Draft alongside quay max. 40 ft. Present quay permits max. LOA of 500 ft. Bar 200 m. East of quay, depth below chart datum is 24 ft.

RESTRICTION: Mooring and unmooring is restricted to daylight hours only.

HEALTH: All vessels boarded by Harbour Quarantine on arrival.

RADIO: Name: Department of Sea Communication. Call sign: 8 AD 22 with freq. 8110 kc/s., receiver SSB 5316 kc/s. Shore radio station only used for district contact (used by Department of Sea Communication).

VHF: Call sign: Meneng Radio, freq. Channel 16, 14, 13, 12, used shore to ship and can be contacted about 25 miles before arriving at Meneng Port.

TUGS: 2 small tugboats are available. Both of 80 h.p., owned by P. T. Jakarta Lloyd.

BERTHING: Present berth length 110 m., to be lengthened to 200 m. in 1977/78. Depth alongside 40 ft.

STEVEDORES: 12 gangs available P. T. Jakarta Lloyd, Banyuwangi Branch and P. T. Pelni Banyuwangi Sub. Branch.

One gang consists of 1 gang boss, 2 winch drivers, 1 Pilot and 13 labourers.

GODOWN: One transit godown 20×50 sq. m. owned by Port Administrator and one transit godown 20×50 sq. m. is being built.

Two 2nd line godowns capacity 10,000 tons owned by P. T. Jakarta Lloyd Banyuwangi Branch. Open storage 10,000 sq. m., 6 godown 2nd line owned by National Logistic Board capacity +20,000 ton specially for rice.

Equipment: One forklift capacity 2.5 tons owned by Port Administrator. Five lorries at 1 ton owned by P T. Jakarta Lloyd. Crane 15 tons can be supplied if necessary.

MEDICAL: Arranged by Department of Health.

FRESH WATER: Available. Handled by Harbour Board, with a loading capacity of about 300 tons per day.

FUEL: Not available.

GANGWAY/DECK WATCHMEN: Available.

OPENING/CLOSING HATCHES: Normally by stevedores.

CUSTOMS ALLOWANCES: 50 cigarettes each Crew member. Packs or tins of tobacco must be open before going ashore. Wines and/or spirits enough for own use. If more required must pay import duties.
CARGO GEAR: Ship's gear used.
IDENTIFICATION CARDS: Required.
CONSULS: No local representation.
REPAIRS: No facilities.
REPATRIATION: Not possible.
TIME: GMT plus 7 hours.
HOLIDAYS: On Sunday and holidays no workers available, but if necessary work can be arranged, except Independence Day (17th August) and 1st Sjawal (Idhul Fitri/Moslem Holiday).
POLICE/FIRE/AMBULANCE: Police and Ambulance available. Fire Brigade owned by District and Paper Mills, telephone Nos. 352, 653, 353 and 503..
TELEPHONES: No facilities for placing telephones on board.
SHORE LEAVE: Allowed, shore pass required.
DELAYS: Possible. During loading if it rains.
DEVELOPMENTS: A new port is being constructed about half a mile South of the port of Meneng. Operated under Pertamina management for oil offloading purposes, the open roadstead harbour will have a 150 m. long wharf with a 10–12 m. depth. Development began in July, 1977, and completion is expected in July, 1979. Exact location of the port, which will be especially for domestic shipping, is Lat. 8° 08′ 09″ S., Long. 114° 24′ 03″ E.

AUTHORITY: Kepala Pelabuhan. (Port Administration).

BELAWAN: 03.47 N. 98.41 E. (See Plan Book)

DOCUMENTS: Upon arrival ships have to fill in the following Forms:

Harbour Report obtainable from the boarding Pilot, or from the Harbour Master.
Pilot's Certificate.

Upon arrival vessels have to produce the following Certificates and Documents, which will remain in the Harbour Master's custody until cleared:

Nationality (Registry) Certificate.
Seaworthiness Certificate.
Measurement (Tonnage) Certificate.
Deratisation (Exemption) Certificate.
International Load Line Certificate.
Safety Certificate (passenger ships).
Safety Equipment Certificate (cargo ships).
Safety Radio and Radiotelephony Certificate (cargo ships).
Certificate of Approval (ship's radio station).
Health Book or Bill of Health.
Last Port Clearance.
Subscription of Light and Harbour Dues and wharfage if any.
Crew Lists and Passenger's Lists.
Ship's Articles.
Other certificates and documents as required.
2 Stores Lists.

PILOTAGE: Pilotage for vessels over 500 cu.m. gross is compulsory. The location of anchorage for vessels awaiting a Pilot is 03° 54′ 50″ N. 98° 45′ 50″ E., near light buoy No. 0 (03° 54′ 14″ N. 98° 44′ 40″ E.).

The new lighthouse at Tg. Nipa Larangan (03° 54′ 00″ N. 98° 40′ 50″ E.) with characteristic GpFl(3)20 sec. 37M 40m, will assist Masters to approach the anchorage. Before arrival Masters have to contact their Agents via Belawan Radio (PKB) and give Information about: ETA, cargo, LOA, draft etc.

To receive information, Masters may use the VHF radio on Channel 12 calling "Belawan Pilot" or "Pilot Boat".

Pilot's service available 24 hours a day.

Pilot must be ordered by the Agent at least 6 hours in advance of the time their service is required.

A sea Pilot and harbour Pilot embark at anchorage when berth has been allotted.

Vessels will proceed when the draft enables vessels to pass through the channel.

The channel is approximately 9 miles in length, 100 m. width and 8 m. depth at LWS with a tidal range about 2 m. and is provided with 7 light buoys and 5 light beacons.

Basin 1,350 m. length. 220 m. width.

Pilot boat is located in the harbour.

When the Pilot is on pilot vessel, H flag will be flown in daylight and quick flashing white light at night.

RESTRICTIONS: Bar is silting excessively and continuous dredging is necessary to keep the shallowest part at 8 m. at LWS. Narrowest part of channel is 50 m. wide.

Outer roads about 600 m. square marked by light buoy. No pilot light vessel. This roadstead is approx. 600 m. wide, the centre of which is the range-line of the swept channel. This channel is provided with buoys and beacons.

TUGS: Join the vessels at buoy No. 11 about 1 mile from harbour. Ship's line to be used for towing line.
Port Authority Regulation:
a. Vessels with LOA less than 100 m. assisted by ....1 tug
b. Vessels with LOA from 100 up to 150 m. assisted by ......2 tugs
c. Vessels with LOA over than 150 m. assisted by 3 tugs
Tugs: 2×800 h.p and 1×1,200 h.p.

RADIO: Coastal Radio Station: Call sign PKT; Class A1, Frequency 8714, A2, Frequency 8754.4.
BERTHING:

Dock or Quay	*Berth No.*	*Nominal Depth below Chart Datum (m.)*	*(ft.)*	*Length of Quay (m.)*
Ocean-going Ujung Baru	104 105 106 107 108 109 110 112 113	10	33	2,187
CITRA Ujung Baru	201 202 203	7	23	
Pelabuhan Lama	022 005 003 006 004 007	6	20	138
Oil Jetty	Pertamina	10	33	60
Mooring Buoys	Pelabuhan Lama	8.5	27	

STEVEDORES: Working hours: Monday–Thursday 0800–1200 hrs., 1300–1600 hrs. Friday 0800–1100 hrs., 1300–1600 hrs. Saturday 0800–1200 hrs., 1300–1500 hrs. Overtime to be applied for from authorities concerned and is usually granted: on working-days during meal-hours, from 1600–2000 hrs. and occasionally till 2200 hrs.; on Sundays and holidays, except Independence Day, 1st Ramadhan, Christmas and 1st January.
CRANES: Mobile cranes, 2×15 ton capacity and 3×25 tons capacity. Floating crane 40 tons capacity. 5 shore cranes with 3–5 tons capacity.
FRESH WATER: Handled by the Harbour Board. Artesian wells all along the Ocean quay with a loading capacity of about 10 t.p.h. The water is regularly laboratory checked and declared drinkable but boiling before use remains recommended. Barge with 200 tons capacity also available.
FUEL: Coal not available. Oil, at 5 points on the quay alongside godown 18 and 19 for Stanvac diesel and marine fuel oil, applications for which must be made 2 weeks in advance. Pumping capacity about 60 t.p.h. Barge with 200 tons capacity also available.
REPAIRS: Slipways available for small craft only. Machine-shops available for minor repairs. Radio repairs available, viz. the Post Telegraph and Telephone Office. Electronic repairs not available.
PORT SECURITY: Maintained by members of the Indonesian Armed Services, usually, Police, Navy or Marine and Army. Crew members should be in possession of a shore pass issued by the Port Authority, accompanied by an identification card when leaving or entering the guarded gates of the Port Area. Shore passes can be obtained via the Agencies.
CUSTOMS: It is strictly prohibited take undeclared foreign currency ashore. Crew members are not allowed to take more than Rp. 50. – (fifty Rupiahs only) ashore. It is recommended that Masters consult the Agents for the local prevailing Customs Regulations with regard to currency, cigarettes, spirits, etc., to prevent unnecessary difficulties and eventually fines.
SHIPMASTER'S REPORT: 1976: I would inform you that all vessels are now berthed or unberthed on a round-the-clock basis, within the draft limits imposed by the dredged channel, which at present is 8 m. LWS with a tidal range of about 2 m. The chief Pilot stated that they would berth vessels up to 10 m. draft at high water.

The pilot station is now equipped with VHF and works on Channel 12: they pass berthing information on this Channel to vessels at anchor. They use 12 as a calling-up and working Channel.

AUTHORITY: Departmeen Perjubungan, Direktorat Djendral Perhubungan Laut.

BIMA: 08.25 S. 118.42 E.

DOCUMENTS:

6 Crew Lists.
6 Vaccination Lists.
6 Stores Lists.
6 Passenger Lists.

PILOTAGE: None available.
ANCHORAGE: 300 m. off the quay in depths of 16 m.
RESTRICTIONS: None, vessel may enter harbour day or night.
MAX. SIZE: Not limited at anchorage.
RADIO: Coastal Radio Station, cable address Pelni Bima by Post Office.
TUGS: No tug-boat available.
BERTHING: Entering and sailing allowed after dark. No berthing facilities except for very small ships.
STEVEDORES: Ordered by Agent. No work allowed on Muslim holidays, New Year and 17th August.

MEDICAL: 1 government hospital available.
FRESH WATER: None available.
FUEL: None available.
GANGWAY/DECK WATCHMEN: None available, police and Customs officers posted on board.
OPENING/CLOSING HATCHES: Carried out by stevedores.
AIRPORT: Flights from Bima to Sumbawa, Ampenan, Bali. By AOA Zamrud (Dakota) every Sunday, Tuesday, Thursday and Saturday. Aviation Corporation.
TIME: GMT plus 8 hours.
HOLIDAYS: Muslim holidays, New Year, 17th August.
TELEPHONES: No phone connections between ship and shore available.
SHORE LEAVE: Crew members are allowed to go ashore and arranged by Agents.
DELAYS: 1 motor-boat, 4 lighters each of 15 tons and 1 lighter of 25 tons. Loading general cargo live buffaloes and fodder. For heavy cargo max. 7 tons each lift can be handled through lighters.

BITUNG: 01.26 N. 125.12 E. (See Plan Book)

PORT LIMITS: The area between:

01° 26′ 24″ N.	125° 11′ 30″ E.
01° 26′ 24″ N.	125° 11′ 30″ E.
01° 27′ 15″ N.	125° 12′ 40″ E.
01° 25′ 25″ N.	125° 12′ 40″ E.

DOCUMENTS:
4 Crew Lists.
4 Lists Passengers in Transit.
4 Lists Passengers Disembarking.
3 Cargo Lists.
3 Provisions Lists.
1 List of Articles new and Customs-barred in possession each crew member – cameras, binoculars, radios, cigarettes, tobacco, etc.
Ship's Register.
International Vaccination Certificate for Crew and Passengers. (Especially for International Travellers.)
Health Book/Maritime Declaration of Health.
Derating Exemption Certificate.

PILOTAGE: Contact Coastal Radio Station Bitung (call sign PKM), telegram address: Bitung Port Administration; advance notice of ETA 24 hours. Pilot boats: 110 h.p. and 350 h.p. light grey. Requiring a Pilot: flag, sound and Morse Signal: "G". Anchorage for vessel awaiting a Pilot: the area between: 01° 26′ 30″ N., 125° 10′ 25″ E; 01° 25′ N., 125° 10′ 08″ E. and 01° 24′ 01″ N., 125° 07′ 01″ E; 01° 24′ 01″ N., 125° 09′ 54″ E.
ANCHORAGE: The area between coast of Lembeh Island and coast of Sulawesi: 01° 27′ N., 125° 12.3′ E.; 01° 26.2′ N., 125° 13.5′ E. and 01° 26.3′ N., 125° 10′ E.; 01° 25′ N., 125° 10.8′ E. Depths: 42 ft. to 114 ft.
RESTRICTIONS: No restrictions on night entry.
Shipmaster's Report: Numerous fishing boats at the port entrance especially at night time, also fishing sticks, and small fishermen's houses on bamboo sticks built at sea, without lights, dangerous to navigation. Approaching or sailing from port at night time, should not be attempted.
MAX. SIZE: Draft alongside pier, max. 32 ft. L.O.A. 760 ft. or 65,000 cu.m. B.R.T.
HEALTH: Vessels coming direct from other countries or coming from infected port: "Q" flag to be flown. Pratique procedure and action necessary to obtain pratique according to the International Sanitary Regulations.
RADIO: Bitung Radio (Call sign P.K.M.) for vessels to route ETA cables to Agents, Receivers, etc.
(MF–Working frequency 438 and 500 kc/s, listening frequency 500 kc/s, emission A.1., A.2.).
Time Schedule: 00.00—01.00
04.00—05.00 } G.M.T.
08.00—09.00
TUGS: 1 tug, 1,160 h.p. also 1 motor launch 40 h.p.
BERTHING: Depths alongside piers are:
A. Ocean going: 16 ft. — 35 ft.
B. Interstate: 17 ft.
STEVEDORES: Arranged by handling Agent.
MEDICAL: Masters to advise by radio prior to arrival if medical attendance required aboard. Vaccination/fever certificates required, 3 copies.
TANKERS: 1 oil jetty for domestic tankers.
DENSITY: About 1030.
FRESH WATER: Available from hose connections on the pier, at a rate of 30 t.p.h.
FUEL: Not all grades fuel available. Diesel and marine lubricants can be supplied. 48 hours notice required.
DEVELOPMENTS: Extension of pier (1,862 ft.) to total length of 2,982 ft. to be completed 1979.
REPAIRS: Some deck and minor engine repairs are possible at Bitung dockyard. Radar and electronic repair available, but not for big repairs.
GANGWAY/DECK WATCHMEN: Not needed.
OPENING/CLOSING HATCHES: Normally by crew/stevedores, otherwise according charter party.
SHIP CERTIFICATES: Registered Tonnage Certificate and all certificates normally required to be on board.
CUSTOMS ALLOWANCE: 100 cigarettes or 20 cigars or 100 gram. tobacco each crew member; 1 bottle wine or spirits for each crew member.
Passengers: Commodity to be worth US$25 per person or US$100 per family.
CARGO GEAR: Loading and discharging by ship's own derricks. Shore cranes capacity 15 and 35 tons.
IDENTIFICATION CARDS: Shore pass issued by the Immigration Office for crew members at Agent's request.
CONSULS: Philippines only.
REPATRIATION: Facilities available.
AIRPORT: About 50 km. from port of Bitung. Regular airlines: Garuda Indonesian Airways (G.I.A.) 7 flights a week.
TIME: Local time GMT plus 9 hours, permanent.
HOLIDAYS: New Year's Day; Idul Adha; 1st Muharam; Ascension Day; Birthday of Prophet Mohammad S.A.W.; Good Friday; Proclamation Day (August 17); Idul Fitri and Christmas Day.
POLICE/AMBULANCE/FIRE: Fire 111.
SHORE LEAVE: Crew members are allowed ashore with a shore pass issued by the Immigration Office.
AUTHORITY: Port Administrator.

CINTA TERMINAL: 5.30 S. 106.14 E. (See Plan Book)

DOCUMENTS: The following documents are required for immediate inspection by the Terminal Officials:
Maritime International Declaration of Health.
Valid Deratisation or Exemption Certificate.
6 copies of Crew Lists.
Passenger List, if any.
Smallpox Vaccination Certificates for all Crew members or passengers within three years.
Certificates of Inoculation against any communicable diseases.
Valid Passports and/or Seaman's Certificates for all Crew members or passengers.
Notice of Readiness.
Indonesian Consular Clearance.
1 Crew Declaration of Personal Belongings.
1 Ship's Stores Inventory.
6 copies of Cargo Manifest for Cinta Terminal loading.
1 Copy of Cargo Manifest for Transit Cargo with a Summary.
1 Copy of Passenger Manifest.

Clearance from the last port of call will be required by the Government Authorities. Crew Lists and Crew Declaration of Personal Belongings must be on the approved Indonesian documents. Vessels are advised on their initial visit to the port to obtain sufficient forms for future visits.

In the normal course of events, Cinta Terminal acts as tanker agent and prepares all crude oil documents. No charges are made for these services. A tanker will be considered clear to depart Cinta Terminal when the crude oil loading documents and his outward clearance certificate have been delivered to the Master of the vessel.

EQUIPMENT: A vessel must have both bower anchors and ground tackle in good working condition and in such sizes and amounts as to meet either "Lloyds" or "A.B.S." standards, although they may be in fact classified by other societies. It is strongly recommended that anchors have proper anchor buoys attached to each anchor.

All vessels must carry suitable stoppers for all Manila or synthetic lines for mooring use.

Vessels to have suitable winches or capstans in good operating condition on the forecastle deck. Constant tension-type winches may not be used except when they can be solidly locked and the constant tension feature not used.

PILOTAGE: Pilotage is compulsory within the Terminal limits. Vessels to be moored at Cinta Terminal will be boarded by Cinta Terminal Mooring Master in the anchorage area. The Mooring Master will advise the ship's Master on approaches to the SBM, mooring, unmooring, connection and disconnecting hoses, and all other operations within the Terminal area. Vessels are requested to have a pilot's ladder, safely and securely rigged, ready for immediate use and long enough to meet the Mooring Master's launch. Vessels will provide a lee for the Mooring Master, both when boarding and leaving. Also a light line should be ready to take aboard the Mooring Master's portable radio.

ANCHORAGE: Position is 5° 25′ 25″ S., 106° 12′ 10″ E. with a radius of one mile which must be used by vessels required to wait at anchor. Anchoring within the Terminal Area is prohibited. Mooring Masters will board arriving tankers in the anchorage area.

The holding area is West of the SBM with water depth of 18 to 20 fathoms. Holding ground is fairly good. Area is large enough for sufficient manoeuvring and swinging room for several vessels.

If a tanker is not scheduled to berth on arrival (e.g. another vessel is already in the berth, or the Terminal is closed on account of adverse weather, etc.), Master will be advised by radio and requested to anchor.

RESTRICTIONS: Weather permitting, Cinta Terminal will operate on 24 hours per day, 7 days per week. Tankers will be berthed during daylight hours only and unmoored on 24 hours basis provided the berth is not occupied and/or storage is not critical.
MAX. SIZE: *Minimum size tanker acceptable:* The minimum sized tanker acceptable at the Terminal will be not less than 20,000 d.w.t.

Max. size tanker acceptable: The max. sized tanker acceptable at the Terminal calling for a full cargo will be 175,000 d.w.t. Larger tankers may be accepted subject to weather conditions at the time of loading without recourse to IIAPCO for any delays.

NAVIGATION AIDS: The SBM is fitted with a 5 nautical mile white flashing light; flashing at a rate of 60 flashes per minute. The SBM is located Lat. 5° 25′ 21″ S. and Long. 106° 14′ 10″ E. and bears 318° True, approximately 51 nautical miles from the Port of Jakarta.

A large 602 ft. long barge "Cinta Natomas" is used for storage of crude oil and for accommodation and headquarters of Cinta Terminal personnel. It lies permanently anchored to an SBM 5° 26′ 40″ S. and 106° 14′ 42″ E. on a line bearing approximately S. 22° E. and 8,500 ft. from the location of the SBM. The barge shows lights and shapes as prescribed in the International Regulations for preventing collisions at sea for vessels engaged in underwater operation, see Rules 4 (c) and 11 (b) (c) (d). The barge is also equipped with a foghorn with 5 seconds on and 55 seconds off sequences forward and 5 seconds on and 55 seconds off abaft, 10 seconds apart.

Four permanently fixed oil producing structures are located in the Terminal area:

There are 15 platforms within 6 miles of the terminal plus one accommodation barge permanently moored in position Lat. 5° 27′ 18″ S. Long. 106° 15′ 52″ E.

Cinta platform "A" rises approximately 65 ft. above water and is located approximately 7,100 ft. from the barge at 5° 26′ 23″ S. by 106° 15′ 50″ E.

Cinta platform "B" is an identical structure to platform "A" and is located at 5° 27′ 01″ S. and 106° 15′ 22″ E. and 4,500 ft. from the barge.

Cinta platform "A" and "B" have heliports.

Cinta platform "C" rises approximately 54 ft. from minimum low water and is connected by a 110 ft. long bridge to Cinta platform "B" on East side.

Kitty platform "A" is located about 33,000 ft. from the barge at 5° 30′ 57″ S. and 106° 11′ 59.5″ E. This platform rises approximately 54 ft. from minimum low water.

RADIO:

Cable address: "Iiapco Jakarta".

Telex: 44221-1A.

Operating Schedules and frequencies: Direct communication by radio telephony between Cinta Terminal (call sign: 6ZFT) and incoming vessels will be by: amplitude modulation (A3, A3H and A3J) operation in the 2-4-8 and 12 mHz bands and by International Marine VHF Channel 16. (156.80 mHz).

Cinta Terminal (call sign: 6ZFT) particulars are as follows: operated by: Independent Indonesian American Petroleum Company (IIAPCO). Position: Lat. 5° 26′ 40″ S. Long. 106° 14′ 42″ E. Hours of operation: 24.

Frequencies	*Class*	*Power*	*Mode*
2182 kHz	A3, A3H, A3J	150 W	AM
2398 kHz	A3, A3H, A3J	150 W	AM
2638 kHz	A3, A3H, A3J	150 W	AM
2738 kHz	A3, A3H, A3J	150 W	AM
4078.0 kHz	A3, A3H, A3J	150 W	AM
4456.0 kHz	A3, A3H, A3J	150 W	AM
8281.2 kHz	A3, A3H, A3J	150 W	AM
8223.6 kHz	A3, A3H, A3J	150 W	AM
12421.0 kHz	A3, A3H, A3J	150 W	AM

International Marine VHF Channels:

6 — 156.30 mHz Simplex
12 — 156.60 mHz Simplex
13 — 156.65 mHz Simplex
14 — 156.70 mHz Simplex
16 — 156.80 mHz Simplex
20 — 157.00 mHz Receive 161.60 mHz Duplex
26 — 157.30 mHz Receive 161.90 mHz Duplex
28 — 157.40 mHz Receive 162.00 mHz Duplex

Notes: 6ZFT keeps continuous watch on 2182, 4456 and 8281.2 kHz. 6ZFT keeps continuous watch on VHF Channel 16.

All communications between ships and Cinta Terminal (6ZFT) will be by way of this station except should a vessel be unable to contact 6ZFT, she should send messages through: Singapore Radio/9VG or Pertamina Radio/PKI-2.

Initial Communications: It is most important that ships establish communications with the Centa Terminal (6ZFT) not less than 72 hours prior to arrival at the Terminal, giving estimated time of arrival. Further ETA information should be sent when the vessel is 48 hours, 24 hours, 12 hours and 4 hours distance or any time a change of one hour in original ETA occurs. These messages should specifically state whether ETA is given in GMT (Z) or local time (K).

Cinta Terminal time is GMT plus 7 hours throughout the year.

The 72 hours signal should include the following:

1. Name of vessel and radio call sign.
2. ETA and date.
3. Cargo requirements.
4. Deballast time.
5. Max. loading rate.
6. Vessels draft on arrival.
7. If there is any sickness aboard or clean bill of health.
8. Last port of call.
9. Any hull, bulkhead, valve or pipeline leaks on vessel which could affect loading or cause pollution.
10. Distance in feet from bow to vessel's loading manifold.

On receipt of the first signal from a vessel Cinta Terminal (6ZFT) will transmit a message to her giving preliminary requirements and details as to Terminal. Masters are urged to comply with this in all details in order to facilitate vessel turn-around and Government formalities.

Communications within 4 hours of terminal: Once ships are within the 4 hours distance of Cinta Terminal (6ZFT) communication, valid radio-telephone communications on International marine VHF may be established on Channel 16 (156.80 mHz). This channel is monitored continuously.

Once contact has been made on Channel 16 further conversation will be conducted on a mutually compatible channel.

The 4 hours signal should confirm information on the time she will require to discharge ballast after arrival. Precise time of arrival should be given when the ship is 4 hours distance from the Terminal.

Communication in Terminal: The Mooring Master will be in direct control of all ship communications while in the Terminal Area. Any unauthorised communications will be cause for cessation of all operations excepting clearing the berth, and the vessel's Notice of Readiness will be nullified immediately.

PRATIQUE: In accordance with international practice, quarantine signals must be displayed by all vessels approaching Cinta Terminal area. These signals shall be displayed continuously until pratique is granted. By day the flag of Indonesia should be flown throughout the vessel's stay in port. The boarding officials will attend the incoming vessel from the Cinta Terminal launch.

NOTICE OF READINESS: After arrival in the anchorage area and when the tanker is in every respect ready to load, the Master may tender his Notice of Readiness. Notice of Readiness will not be accepted during periods when the Terminal is closed. The Terminal is "closed" when the weather is such that it is too rough for incoming tankers to berth. The decision regarding the opening and closing of the Terminal will rest with the Terminal Superintendent. Tenders by vessels to load crude oil cargo will be normally accepted and berth assigned to vessels in chronological order of arrival provided such vessels have current nomination for cargo valid at the time of tender, carry clean ballast (if any), and have cargo tanks in fit condition to receive cargo. Also they must be in all respects properly equipped and ready to moor. Should berthing be delayed on account of bad weather, vessels will keep their position in line.

TUGS: Tugs and/or launches may assist in berthing vessels. These are under the direct supervision and control of the Mooring Master.

BERTH DESCRIPTION: The Terminal and Production Administrative Offices are located on board the 143,000 d.w.t. crude storage barge *Cinta Natomas* permanently moored approximately 8,500 ft. on a line bearing South 22° E. from the SBM. The nearest port with facilities is Jakarta approximately 51 nautical miles South-east.

The single point mooring buoy berth (SBM) is 11 m. in diameter, and designed to handle tankers in the 175,000 d.w.t. class. The buoy is equipped with dual 12-inch floating hose with ASA 150 pound flanged connections. Both strings must be taken aboard. Loading rates will be from 13,000 to 40,000 barrel per hour range. The SBM is also provided with two permanently attached 15-inch circumference synthetic fibre floating mooring lines. These lines should be held under tension by the vessel at all times.

MOORING: Tankers are requested to have ready on the forecastle head the following:

- *(a)* Messenger lines on the forecastle head for bringing 2 mooring lines aboard from the SBM (min. 6-in. circumference).
- *(b)* Mooring winches on forecastle head for handling two 12-in. circumference synthetic fibre floating mooring lines from the SBM.
- *(c)* Adequate chafing gear to prevent damage to mooring lines.
- *(d)* Derrick rigged and ready to pick up from launch, mooring shackles, nylon stops and hose connection gear on the port side midships.

On the near approach to the buoy a launch will attach a ship's line to one of the Terminal's floating mooring lines. This will be hove aboard and secured to the towing brackets, if the ship is so fitted, or otherwise secured by a ship's mooring wire and nylon stop previously passed aboard. The same operation will be repeated with the second mooring line.

The Mooring Master may require the vessel to unmoor at any time he deems it necessary for the safety of the vessel or mooring buoy or both, or infringement of the Terminal regulations.

HOSES: The Mooring master along with a ship's officer will direct the ship's crew in the raising, lowering, connecting and disconnecting the oil loading hoses as well as all other labour pertaining to the loading of crude. The Terminal will not provide any labour for work done aboard the vessel.

Vessels must be adequately equipped with boom, blocks, tackle, wire runners and sundry equipment on the port side to hoist the floating hoses from the sea to the loading position. (5 tons min. hoist size required.) Vessel's loading manifolds should be prepared for two 12-in. ASA 150-lb. flanged hose connections prior to vessel's arrival at Terminal. Where no crossover valves exist on loading manifolds it is recommended that loops between loading lines on the starboard side of these manifolds be fitted. 8-in. hose connections to be removed; also, if necessary, "Y" pieces removed so that max. flow through the 12-in. cargo hoses will not be reduced. To assist in vessel's turnaround, tankers should have all necessary booms and cargo gear rigged and ready before ship is boarded by Mooring Master.

Vessels which may consider the lifting capacity of their gear to be marginal should strengthen their gear accordingly. A common way to do so is to rig a second topping lift on the boom.

LOADING: Before the loading begins, the Master will ensure that all Terminal and Port Regulations pertaining to the readiness of the vessel have been complied with; that the vessel is manned and in all respects ready to receive crude, and that all precautions required by the circumstances have been taken.

All communications relative to the loading of the vessel shall be routed through the Mooring Master who will remain in contact with storage barge *Cinta Natomas* constantly via portable VHF Units. In case of temporary breakdown of the portable VHF circuit, contact may be continued on International Marine Channels if the vessel is so fitted.

Should communications with the *Cinta Natomas* fail, loading ceases. An emergency cessation of loading may be effected by a continuous sounding of the ship's whistle.

The max. loading rate will be 40,000 b.p.h. (5,300 long t.p.h.). Loading will commence with one pump; when the vessel advises that the cargo is flowing into the tanks, the loading rate will be increased until the desired rate has been reached.

Vessels shall not close down against the incoming oil flow. Vessels will be held liable for damages resulting from failure to observe this precaution.

The vessel must give 30 minutes notice to the *Cinta Natomas* before starting to "top-off", and shall advise if a decrease in loading rate is desired.

The vessel must give 15 minutes' notice to the *Cinta Natomas* prior to the completion of loading, at which time the *Cinta Natomas* may reduce to one pump.

On completion of loading, all pumps will be stopped, loading hoses disconnected, and blind flanges with gaskets installed on the loading hose before lowering over the side. There should be no leakage. All cargo tank openings and pressure vacuum relief valves must be closed immediately after ullages and samples have been taken.

All documentation will be completed as soon as possible after loading is completed.

If during loading it is revealed that oil is leaking from the tanker, so as to constitute a safety or pollution hazard, loading shall cease and the tanker may have to leave the Terminal limits at the sole discretion of the Mooring Master. Completion of loading will only be undertaken if repairs have been carried out to the tanker to the satisfaction of the Mooring Master. A tanker so rejected shall not later be accepted on a subsequent visit for loading until satisfactory evidence of repair is submitted duly certified by ABS, Lloyds or other recognised surveyors.

Notice must be given by the vessel to the Mooring Master 30 minutes before vessel completes deballasting. The Mooring Master will advise the Cinta Terminal.

BALLAST: It is responsibility of the ship's Master to see that no oil (crude, bunkers, diesel or bilge) or dirty ballast is pumped or spilled overboard from his ship while in the area. Drip pans should be used, especially when disconnecting hoses, in order to prevent spillage overboard.

Before loading commences all overside scuppers shall be made oiltight. At Cinta Terminal there are no slop tanks or facilities for receiving dirty ballast. Tankers must arrive with clean ballast. In the event a tanker does have dirty ballast it will not be allowed to be pumped overboard.

A vessel must have sufficient ballast for safe handling, having due regard to existing weather and sea conditions. Through careful watch of the weather and sea conditions, frequent exchange of information between ship and Terminal, and by a knowledge of the behaviour of his own vessel, the ship's Master may come to the Terminal with a minimum of ballast and thus lessen any possibility of infringement of sea pollution regulations.

Vessels equipped with a separate system of ballast tanks will be allowed to discharge ballast and load oil simultaneously, provided approval is first obtained from the Company Mooring Master and provided Government Petroleum Inspector agrees to do so.

Discharging ballast at night: When any vessel is discharging ballast in darkness, the sea around the area of discharge will be adequately lighted, so that any pollution will be readily noticeable.

FRESH WATER: Not available.

FUEL: Not available.

REPAIRS: No repairs are to be made while berthing or unberthing, or in the berth. All engines to be on 30 minutes standby and steam on deck at all times.

MEDICAL: At Cinta Terminal, medical and dental services are not available. In emergencies requiring hospitalisation, the patient will have to be flown by helicopter to Jakarta. All expenses will be charged to the ship owner.

CUSTOMS ALLOWANCES: Cigarettes, cigars, tobacco, matches, spirits, wines, beer, perfume, arms, ammunition and possibly other items will be locked up under customs' seal from time of arrival of ship at the Terminal until the time of leaving territorial waters.

Each person is allowed 20 cigarettes per day of stay or 3 grams of tobacco or cigars in lieu thereof. Each man is allowed one litre of beer or half litre of wine per day. Special allowances are made for the Master under special circumstances.

Indonesian Customs and Immigration Officials will board the vessel as soon as possible after arrival to give inward clearance and pratique service. Indonesian Government Regulations are strictly enforced.

Contraband: The attention of Masters is called to the strict enforcement of Indonesian Regulations against smuggling. Illegal possession or landing of such items as narcotics, liquor, cigarettes, ammunition, sheath knives and similar weapons or other articles of contraband is subject to severe penalty and may result in prolonged delay of the vessel concerned.

All precautions must be taken to prevent the violation of contraband laws.

Masters are requested to inform the ship's officers and crew of the foregoing regulations pertaining to contraband, shore liberty, etc., and to be assured that all personnel completely understand.

IDENTIFICATION CARDS: Visitors must obtain a Special Pass from Indonesian Government Officials located in the Terminal and from the Company's Mooring Masters. It is recommended that visitors be restricted to a minimum due to hazards involved.

TIME: Indonesian local time is GMT plus 7 hours.

SHORE LEAVE: Shore liberty will not be granted except in cases of extreme emergency. Crew members cannot pay off or leave vessel at Terminal.

GENERAL: Safety rules and regulations are strictly enforced. The safety requirements are based upon the provisions of the Code of Safe Practices currently accepted by the Oil and Tanker Industries.

Provisions, spare parts or stores of any sort shall not be loaded from or discharged into any craft while the tanker is in or near the berth.

When a Mooring Master and his launch crew are assigned to a ship on business, it is expected that the ship will supply them with meals at the same time and in the same manner as comparable with personnel of the ship. No special meals or special foods will be required. The Terminal will keep this item to a basic minimum. The ship should also provide shelter and smoking facilities in the same manner as meals. All communictions between Terminal personnel assigned to a ship and ship's personnel should be through the Mooring Master.

AUTHORITY: Independent Indonesian American Petroleum Company, Jakarta.

DUMAI: 01.41 N. 101.27 E. **(See Plan Book)**

DOCUMENTS:

Maritime International Declaration of Health.
Valid Deratisation or Deratisation Exemption Certificate.
12 Crew Lists.
12 Passenger Lists (if passengers carried).
Smallpox Vaccination Certificates for all crew members and passengers.
Certificates of inoculation against any communicable diseases.
Valid Passports and/or Seamen's Certificates for all crew members and passengers.
Quarantine Certificates if expired, can be renewed.
Harbour report/last port clearance.
Load Line, Ship's Registry, Safety Radio, Construction and Equipment Certificates.
For Customs: 1 Crew List, 4 copies Personal Effects List, 4 copies Stores List.

APPROACHES: The Dumai Port installations can be reached by deep draft vessels by proceeding from Malacca Strait into Bengkalis and following a buoyed channel on a Southerly course for a distance of 22 miles to the junction of the Rupat Strait. Vessels must make a turn of approximately 180 degrees to enter the Rupat Strait and thence Westerly for a distance of 33 miles to Dumai. The Bengkalis and Rupat Strait fairways have been wire-dragged clear to a depth of 24 m. and 18.3 m. LWS respectively.

PILOTAGE: Harbour pilotage is performed by Government Pilots. The Harbour Pilot will board a vessel at anchorage for berthing or immediately on arrival at Buoy No. 18 when berth is available.

Sea piloting for the Rupat and Bengkalis Straits is provided by the Department of Sea Communication.

Sea piloting for the Rupat Strait is compulsory. According to the Dumai Port Authority's letter dated June 25, 1974, there are 2 piloting areas for Sea Pilot.

Bengkalis Strait and Rupat Strait from fairway buoy or Eastern part of Morong Strait to Eastern limit of Dumai Harbour Pilot Area (Long. 101° 30′ 00″ E.)

Rupat Strait and Bengkalis Strait from Eastern limit of Dumai Harbour Pilot Area (Long. 101° 30′ 00″ E.) to Northern limit of Sungai Pakning Harbour Pilot Area. Subject to pilotage compulsory for the vessel capacity more than 300 cu.m. gross.

For arriving, vessel should call 6 hours prior CPI's Radio Telephone (VHF) on Channel 12 and 16 at fairway buoy as "request for Pilot" or hoist International Code Flag, painted white, to call "Pilot".

According to the Dumai Port Authority's memo dated May, 1972, effective on 1st June, 1972, all vessels proceeding to Dumai should hoist the International code flag H or PT when passing buoy No. 17 as "requesting for Pilot" and call CPI's Radio Telephone (VHF) on Channel 12. You will be informed whether or not Pilots are available, if not you may then proceed directly to Dumai Harbour anchorage area.

The practice of berthing and unberthing vessels utilising CPI mooring masters has been discontinued.

Shipmaster's Report: 1977. Sea pilotage for the Rupat and Bengkalis Straits is now compulsory. The sea Pilot will board vessels at Fairway Buoy, position Lat. 01° 54.5′ N., Long. 101° 51.5′ E.

Contact with the pilot station "MORONG" is allowed on Channel 16.

In case the Pilot is not available, the recommended anchorage area is 0.5 mile N.N.E. from Fairway Buoy.

ANCHORAGE: The Dumai general anchorage area is North and West of oil wharves. Minimum depth of water in this area 43 ft.; 35 ft. shoal spot to East of general anchorage should be noticed. Holding ground in anchorages considered good, bottom clay. Area large with sufficient manoeuvring and swinging room for several vessels of size to be accommodated at oil wharves.

If vessels are not met by the Pilot's launch on arrival, or not instructed by the Dumai Port Control Radio to berth on arrival, it is suggested that they proceed to the recommended anchorage area.

MAX. SIZE: Length 1,263 ft., draft 57 ft.

ETA ADVICES:

1. Proceeding direct from ports other than Palembang and not stopping at Singapore en route:
   - *(a)* Radio 96 hour ETA to "Calpaking Dumai" (include operational data).
   - *(b)* If any time this estimated arrival time changes by 2 hours, send an amended ETA message immediately.
   - *(c)* 24 hours before arrival, *confirm* or *amend* the ETA message regardless of any change from the last advice.
2. Proceeding from Singapore:
   - *(a)* Prior to arrival at Singapore, radio 96 hour ETA Dumai include words "From Singapore" to "Calpaking Dumai" predicted on estimated time of stay at Singapore.
   - *(b)* At Singapore, when departure time from Singapore is known confirm or amend the ETA to "Calpaking Dumai" through your Singapore ship's Agent.
   - *(c)* Immediately upon departure from Singapore, and when able to use the vessel's radio legally, again *confirm* or *amend* the ETA to "Calpaking Dumai".
3. Proceeding from Palembang:
   - *(a)* When departing Dumai on voyages to Palembang and return, give the Dumai Agent a verbal estimate of arrival back at Dumai in each instance.
   - *(b)* Whether or not *(a)* is applicable, when time of departure from Palembang is known, cable an ETA message to "Calpaking Dumai" through your Palembang Agent.
   - *(c)* Immediately on departing Palembang, and when able to use the vessel's radio legally, *confirm* or *amend* this ETA to "Calpaking Dumai".

RESTRICTIONS: All vessels inbound to Dumai from the time abreast Raleigh Bank light buoy until anchoraged off Dumai Terminal must display the following recognition signals.

By day: The International Code Flag hoist "CAL" flown from a single hoist from the signal yard.

By night: A red light 6 ft. above a white light both visible all around the horizon at a distance of not less than 2 miles.

Vessels should be prepared to answer identification queries from Indonesian naval patrol crafts. The foregoing is subject to change.

For some years, the Rupat-Bengkalis Strait area has been designated a restricted Maritime Zone by decree of the Government of Indonesia. A partial exemption from the requirement to secure special Indonesian Consular Clearance before entering this zone has been granted by the Indonesian Navy to tank-vessels proceeding to Dumai from any port in the world except Singapore. Vessels require only normal clearances from their last port to obtain entry at Dumai. Vessels diverted at sea need only normal clearance from last port and the diversion cable.

RADIO: There is a Government coastal station at Dumai. Any message for Dumai Terminal should be sent through this radio station which operates as follows:

Name: Dumai Radio.
Call Letters: "PKP"

Time (GMT)	*Transmits*	*Listens on*
0000–0030	448 kc/s.	500 kc/s.
0400–0500	448 kc/s.	500 kc/s.
0800–0900	448 kc/s.	500 kc/s.
1200–1300	448 kc/s.	500 kc/s.
1300–1400	8726/AL kc/s.	8726 kc/s.
0030–0130	8726/AL kc/s.	8726 kc/s.
0230–0330	13101 kc/s.	13101 kc/s.
0630–0730	17184 kc/s.	17184 kc/s.
0130–0200	2182 kc/s.	3195 kc/s.

If contact cannot be made with Dumai Radio, then you should immediately contact Singapore Radio, Call Sign 9VG and forward your ETA message to "Amoseas Singapore RS–21349".

A C.P.I.-operated VHF station is maintained 24 hours a day, and is available for information concerning vessel's port activities. Channel 12 is utilised. Frequencies: 156.6.

Channel 16 is also utilised. Frequencies: 156.8.

HEALTH: In accordance with international practice, quarantine signals must be displayed by all vessels approaching Dumai. These signals shall be displayed continuously until pratique is granted. These signals are: Sunrise to Sunset, Quarantine flag "Q". Sunset to Sunrise, Signal lights (red over white).

Quarantine Officer and Immigration Officer will come on board to prepare the clearance at anchorage, except when the vessel comes alongside on arrival by issuing berthing permit only (not free pratique).

TUGS: Mooring and unmooring assistance is provided by three 3,000 h.p. diesel electric tugs which are stationed in the immediate vicinity of the wharves. While rendering assistance the tug-boats are under order of the Pilot on duty.

BERTHING: Incoming ships are assigned in accordance with time of arrival, product to be loaded, size of vessels, and loaded draft.

Every effort will be made to berth vessels immediately upon arrival, and to this end Master should maintain radio contact with radio telephone (VHF) Channels 12 and 16.

At Dumai there are 6 wharves. 1 wharf is a Government-owned and operated cargo wharf which can also handle discharge of petroleum products. Another wharf is Pertamina, owned and operated for the sole use of its refinery. The other 4 wharves are C.P.I. owned and operated and referred to as Oil Wharf No. 1, Oil Wharf No. 2, Oil Wharf No. 3, and Oil Wharf No. 4. These C.P.I. wharves are utilised for loading of crude oil and can handle refinery product and caustic soda resin.

- *(a)* Oil Wharf No. 1, located in approx. position 01° 41′ 14″ N. 101° 28′ 07″ E. Design capacity 150,000 d.w.t. Length between outer dolphins 1,210 ft. Least depth at face of wharf 57 ft. (MLWS). In terms of vessel's size and design this would be an LOA of approx. 1,008 ft., and a draft of 57 ft. Orientation of the wharf parallels the current flow.
- *(b)* Oil Wharf No. 2, located in approx. position 01° 41′ 14″ N. 101° 27′ 52″ E. Design capacity 150,000 d.w.t. Length between outer dolphins 1,465 ft. 8 in. Least depth at face of wharf 58 ft. (MLWS). In terms of vessel's size and design this would be an LOA of approx. 1,263 ft., and a draft of 55 ft. Orientation of the wharf parallels the current flow.
- *(c)* Oil Wharf No. 3, located in approx. position 01° 41′ 14″ N. 101° 27′ 42″ E. Design capacity 84,000 d.w.t. Length between outer dolphins 1,170 ft. Under favourable weather conditions capable of receiving vessels of 100,000 d.w.t. Least depth at wharf face 57 ft. (MLWS). In terms of vessel's size and design this would be an LOA of approx. 940 ft. and a draft of 54 ft. Orientation of the wharf parallels the current flow at 095–275 true.
- *(d)* Oil Wharf No. 4, the former T-2 wharf, located between the Cargo Wharf and Oil Wharf No. 3. Wharf used mostly for handling domestic tankers. Basic design is for 55,000 d.w.t. In terms of vessel's size and design this would be an LOA of approx. 680 ft. and a draft of approx. 46 ft. Least depth of water at face is 51 ft. (MLWS). Overall length between mooring dolphins is 680 ft. Orientation of the wharf parallels the current flow.
- *(e)* Government Cargo Wharf located in approx. position 01° 41′ 14″ N. 101° 27′ 04″ E. Design capacity 16,500 d.w.t. but able to handle 23,000 d.w.t. Length between outer dolphins 750 ft. Least depth at wharf face 34 ft. (MLWS). Orientation of the wharf parallels the current flow. Only mobile cranes with a maximum lifting capacity of five (5) tons are available. As no heavy lift floating crane or stationary crane is available, heavy lifts must be handled by ship's gear.
- *(f)* Pertamina Refinery Wharf, located in approximate position 01° 41′ 12″ N. 101° 28′ 16″ E. Design capacities, Outer Berth 100,000 d.w.t., Inner Berth 10,000 d.w.t.

BALLAST: There are no shore facilities at Dumai for disposal of dirty ballast water. Vessels should arrive with sufficient clean ballast water to enable safe manoeuvring under prevailing weather conditions. All ballast water must be pumped overboard after arrival at berth, and prior to loading, unless "load on top" procedures apply. If, after arriving alongside, a vessel is found to have oily ballast water on board, such vessel will be sent to sea to accomplish the necessary tank cleaning. A new Notice of Readiness to load must then be tendered.

Effective First Quarter of 1977 (approx.) there will be shore facilities for the disposal of dirty ballast water.

Minimum draft schedules recommended for various tonnage tankers are as follows:

D.wt. *(deadweight tons)*	*Minimum draft* *forward – aft*
(a) 12,000–22,000	12 ft. – 20 ft.
(b) 22,000–32,000	16 ft. – 24 ft.
(c) 32,000–45,000	18 ft. – 26 ft.
(d) 45,000–60,000	19 ft. – 27 ft.
(e) 60,000 and over	22 ft. – 28 ft.

CARGO: There are 2 types of cargo in Dumai at C.P.I. Terminal.

1. Sumatra Light Crude with API Gravity=35° approximate Pour Point ± 100°F Solid Point ± 95°F.
2. Duri Crude with API Gravity=22.0° approximate Pour Point ± 40°F Solid Point ± 35°F.

LOADING: The Master or his representative is required to hand to C.P.I. within normal business hours a written Notice of Readiness to load.

Wharf	*Size of arms*	*Number of arms*	*Size of flanges*	*Capacity b.p.h.*
Oil Wharf No. 1	12 in.	4	12 in.	60,000
Oil Wharf No. 2	16 in.–12 in.	3	12 in.	90,000
Oil Wharf No. 3	12 in.	4	12 in.	60,000
Oil Wharf No. 4	12 in.	2	12 in.	40,000

Oil Wharves 1, 2 and 3 use U.S. standard flanges, faced and drilled. These wharves have Chicksan loading arms while Oil Wharf No. 4 operates with hoses swung on board by the wharves' derricks.

Wharf crews and launch crews are on duty to handle loading arms and/or oil hoses and mooring lines on the wharf. Mooring lines on the vessel will not be handled by C.P.I. personnel. Ratguards must be fitted on all mooring lines.

The required reducers to fit vessel's manifold must be connected and disconnected by ship's personnel.

Upon completion of loading, the vessel will be required to leave the berth immediately after disconnecting hoses and await clearance at the anchorage.

Notice must be given by the vessel to the Piermaster one half hour before the vessel completes deballasting.

Loading will commence under gravity or with 1 pump. When the vessel advises that the cargo is flowing into tanks, the loading rate will gradually be increased until the desired rate has been reached.

The vessel must give 30 minutes notice to the wharf before starting to "top-off", and shall advise if a decrease in loading rate is desired.

The vessel must give 15 minutes' notice to the wharf prior to completion of loading at which time the Piermaster may reduce to 1 pump.

Ship's valves shall not be closed against loading pump pressure.

On completion of loading, loading arms and/or cargo hoses must be drained and disconnected immediately.

All cargo tank openings and pressure vacuum relief valves must be closed immediately after ullages and samples have been taken.

FRESH WATER: Not available.

FUEL: Not available.

MEDICAL: The port health doctor has only limited facilities for medical treatment. If the services of more complete and/or specialised medical assistance are needed or emergency cases arise on board tankers calling at Dumai, the port health doctor might refer such cases to CPI hospital facilities. However, Masters of all vessels bound for Dumai are requested, if possible, to call at Singapore for medical assistance.

REPAIRS: No repairs shall be carried out to the main propulsion machinery and/or essential auxiliaries while alongside. The vessel's main propulsion machinery shall be in readiness for instantaneous use on short notice. No repair facilities ashore.

CUSTOMS: Ships' bonded stores will be sealed by the Indonesian Customs officials on arrival and will remain sealed until the vessels leave Indonesian waters.

GANGWAY/DECK WATCHMEN: Strongly suggest that all Masters of tankers calling at Dumai maintain a close security watch while at anchor as well as when alongside the wharves. It is further recommended that on board the tankers unoccupied rooms should be securely locked and port holes closed before being vacated.

TIME: GMT plus 7 hours all year round.

REPATRIATION: Due to stringent Indonesia Government regulations, normally no passengers and/or crew members from any vessel are allowed to disembark for repatriation purposes.

SHORE LEAVE: Shore liberty may normally be granted to ship's officers and crew after clearance of the vessel by harbour authorities, and open for 24 hours. Recreational facilities are not available for seagoing personnel at present and few facilities exist in the village of Dumai. Personnel proceeding on shore liberty should be provided with ship's pass and advised that the CPI compound is out of bounds with the exception of the road from the wharves to the village road.

PROVISIONS: No facilities for supplying provisions, nor for handling ship's laundry.

CONSULS: At Dumai the Indonesian Government Port Authorities are located in the Government Building situated close to the Government Cargo Wharf.

There are no Consuls or other foreign Government Representatives located at Dumai, or in the immediate vicinity.

TELEPHONE: As soon as the vessel is berthed a ship-shore telephone connection will be provided.

Ships berthed at No. 1 oil wharf tel. 351; No. 2: 352; No. 3: 353; and No. 4: 354.

The loading master will provide a list of important numbers in Dumai.

WEATHER: *Tides and Currents:* The tide rise is approximately 8 ft. in the springs and approximately 5 ft. at neaps.

Max. tide currents: Flooding Easterly at 3 knots. Ebbing Westerly at 2 knots.

The general direction of the current is parallel to the faces of the wharves. There is no slack current period in the Rupat Strait during spring tides and only a very brief period of slack current during neap tides. The current reverses its direction almost immediately. Vessels will always be berthed stemming the current flow.

Winds: The N.E. monsoon is never very steady but is most constant in January when from 20 to 40 per cent of winds are N.E. In November and December N.W. winds are the most frequent. In February the most frequent winds are N.E. The S.W. monsoon begins in late May or early June. From June to September winds in the straits are mainly S.E. but not steady. At this season squalls known as "Sumatra's" occur off the coast; they are most frequent between 2200 and 0200 hrs.

Rain: The rainfall is heavy with yearly average from 80 to 100 inches. The wettest months are October to December or January. There are 2 comparatively dry seasons, February to March and June to August. The most intense rainfalls are in the afternoon but these heavy downpours are often short in duration. The duration of the rain is more evenly spread over 24 hours during the N.E. monsoon than during the rest of the year when rain most likely occurs in the evening and night.

Temperature: The average temperature is a little below 80°. The range in an average year is only 30°, between 65° and 95°. The daily range is from 15° to 20°. The humidity is high (70 to 90 per cent).

GENERAL: While alongside, vessels must have the eye of towing (fire) wires lowered to the water's edge from offshore bow and quarter for emergency use. The eye of the wire should be painted white.

AUTHORITY: Caltex Pacific Indonesia (C.P.I.).

AGENTS: C.P.I. will act as ship's Agents for vessels loading at C.P.I. facilities Dumai except for certain interinsular vessels. As mail service to and from Sumatra is relatively slow and subject to some frequent delays, ample time should be allowed in dispatching mail to vessel calling at ports in this area. The mail and cable addresses for C.P.I. are as follows:

Mail: P.T. Caltex Pacific Indonesia (for Dumai), Kebon Sirih 52, Jakarta, Indonesia (via mail).

Cable: Calpaking Dumai (via Radio Station "PKP").

Another Agent is Pertamina, a State enterprise, who usually handles matters pertaining to Pertamina owned or chartered tankers.

JAKARTA (Tandjong Priok): 06.10 S. 106.50 E.
(See Plan Book)

DOCUMENTS: Upon arrival vessels have to produce the wing Certificates and Documents, which will remain in the Harbour Master's custody until cleared:

Nationality (Registry) Certificate.
Seaworthiness Certificate.
Measurement (Tonnage) Certificate.
Deratisation (Exemption) Certificate.
International Load Line Certificate.
Safety Certificate (passenger ships).
Safety Equipment Certificate (cargo ships).
Safety Radio and Radiotelephony Certificate (cargo ships).
Certificate of Approval (ship's radio station).
Health Book or Bill of Health.
Vaccination Certificates.
Last Port Clearance.
Subscription of Light and Harbour Dues and wharfage if any.
Crew Lists and Passenger's Lists.
Ship's Articles.
Other certificates and documents as required.

Ship's arrival and departure: 2 days before arrival of vessel, the ship's Agent has to inform the Port Administration, by completing appropriate forms. Copies of completed forms must also be submitted to the Harbour Master, Port Health Service, Immigration, Customs and Security for preparations of services. The Pilot may berth the vessel on request of the ship's Agent only after obtaining clearance from the Port Administrator, Harbour Master, Port Health Service and Immigration (foreign vessels only).

Before departure, port clearance is issued by the Harbour Master, after clearance has been obtained from Customs, the Port Health Service, and Immigration.

Ship's Certificate: The Ship's Certificate should be delivered to the Harbour Master through the Agent. This certificate will be returned to the Ship's Master prior to the ship's departure.

Ship's Manifest and Bill of Lading: The copy of the ship's manifest should be delivered to the Port Administrator through the Agent.

IMMIGRATION: Vessels arriving from abroad with passengers must hoist the N Flag. Masters have to supply the boarding Immigration Officer with Passenger's List of: *(a)* disembarking. *(b)* transhipping. *(c)* through passengers.

No persons are allowed on board until the vessel has been examined and the N Flag taken down. Passengers must be in possession of a valid visa: visitor's, entry or a transit visa. Those not having a visa may at the discretion of the Immigration Officer, obtain a landing permit. Members of the crew including the Master must appear in the Articles, in order to get shore permits.

PILOTAGE: Compulsory. Pilots will board the vessel at the Outer Anchorage, from 0800–1800 hrs.

The ship's Owner/Agent has to inform the Port Administration (the Pilotage Division) of the ship's arrival 24 hours in advance.

Walkie-talkie radio with a frequency of M.27 is used for communication between the pilot boats and the Pilot station.

ANCHORAGE: Anchorage for vessels waiting for the Pilot is outside the breakwater.

RESTRICTIONS: Max. draft is approximately 10 m.

MAX. SIZE:

Harbour	*Length* (m.)	*Draft* (m.)
1st	150	7
2nd	170	8
3rd	170	10
Oil	170	10
Coaster	60	4

HEALTH:

Quarantine: A vessel is in quarantine and must hoist the quarantine flag (Q, QL, QQ), when it is a vessel:

1. that comes directly from abroad (Q flag),
2. that comes from an infected Indonesian Port (Q flag),
3. that takes passengers or cargo over from vessels mentioned in items (1) and (2) (Q flag),
4. whose captain has declared that a quarantinable disease exists or is suspected on board (QL/QQ).
5. which the Port Medical Officer has declared infected or suspected with a quarantinable disease (QL/QQ).

The concerned vessel is free from quarantine measures when free pratique has been obtained. The free pratique becomes invalid when a vessel is in quarantine as stated above or a quarantinable disease occurs during the validity of free pratique.

The Port of Tunjung Priok is a 1st class Quarantine Port.

At the request of the ship's Owner/Agent, the Department of Health will provide "provisional pratique", for vessels calling directly from abroad to any Indonesian port which is not classified as a quarantine port, provided that health conditions on board comply with the required health conditions. This "provisional pratique" however does not relieve the vessel from quarantine measures, and it is not to be construed as "free pratique".

Accordingly vessels enjoying "provisional pratique" are still required to hoist the quarantine flag.

Vaccination/Immunization: Vaccination and Immunization against smallpox and cholera can be carried out by the Port Health Service.

BOARDING AREA: Harbour Pilots, Quarantine Officer and Immigration will board the vessel at the Outer roads.

RADIO: Coastal Radio Station Call sign PKI Class A1, A2, A3; call sign PKZ Class A3.

VHF:

Harbour Master	Channel 16
Pilot	Channel 12–14
Tugboat Operations	Channel 12
Port Operations	Channel 14
Public Service	Channel 16

TUGS: Tugs are operated by the State-owned P.N. Tunda Bara, Cable address: "Coaltug", which also handle the mooring facilities. Vessels over 80 m. in length have to use at least 1 tug. 10 tugs available from 135 h.p. to 1,500 h.p. 2 tugs are equipped for fire fighting.

BERTHING:

Wharves	*Length* (m.)	*Depth* (m.)
Coaster Harbour	663	3–4
1st Inner Harbour	1,855	5–8
2nd Inner Harbour	1,900	
for coal	150	7–9
for fertilizer	150	
for mineral oil	25	
3rd Inner Harbour	1,080	8–10.5
Mineral Oil Harbour		
Oil Jetty (3 at 25)	75	9–10
Bogasari (wheat)	140	9–10
Wooden	100	5–7

Buoys	*Number*	*Capacity* (tons)
West buoys	6	15,000
East buoys	10	5,000
1st Inner Harbour buoys	7	6,000
3rd Inner Harbour buoys	4	15,000
Nusantara buoys	2	5,000
Dredging Yard buoys	1	2,000

SPECIALISED CARGO-HANDLING FACILITIES: There are 2 transporters with grippers available at the coal wharf.

CRANES: *Mobile cranes:*

No.	*Capacity* (tons)
4	5
5	20
1	35
14	3–20

Shore cranes/Portal cranes:

12	3

Floating cranes:

1	15
1	60
1	25
1	200

STEVEDORES:

Working hours: The usual working hours at the harbour are:

Monday–Thursday	0800–1200 hrs.
	1300–1600 hrs.
Friday	0800–1100 hrs.
	1330–1600 hrs.
Saturday	0800–1200 hrs.
	1300–1400 hrs.

Overtime is allowed on request.

Shipmaster's Report: Cargo work continuous, 7 days a week. No work for 2 days at the end of Ramadan.

MEDICAL: First Aid at the scene of accident. Medical treatment or advice available on request to the Port Health Service. Hospitalisation available in general and private hospital in Jakarta.

FRESH WATER: Available by pipe-line or barge, rate 50/60 t.p.h. Barge capacity 60–350 tons.

FUEL: Available by pipe-line or barge, supplier is Pertamina.

REPAIRS: Dry-docking and repairs are carried out by the State-owned P.N. Dock.

Electronic Repair Shop: Repair of electronic navigational aids and radio can be carried out by experts.

Repair and Testing of Navigational Instruments: Carried out by experts of the Hidral (Hydrography of the Indonesian Navy) and those of the P.N. Pelni workshop. Compass can be adjusted by an expert of the above-mentioned Hidral. Testing and issuing of certificates for navigational lamps by the Pelni workshop.

DRY DOCKS: 3 floating docks, max. capacity 17,500 tons, and 7 slipways, max. capacity 3,275 tons.

GANGWAY/DECK WATCHMEN: Available if required.

CUSTOMS ALLOWANCES: Tobacco: Each crew member is allowed to carry 200 cigarettes or 50 cigars or 100 grams of tobacco ashore without paying import duty. Alcohol: There is no allowance for alcoholic drinks. Other commodities: Maximum value of US $100. Each crew member is allowed to bring personal goods in use up to maximum value of US $100.

REPATRIATION: A valid document is needed. A re-entry permit from the country concerned is sufficient, if there is no passport available.

AIRPORT: Kemayoran International Airport is approximately 8 km from Tanjung Priok, and Halim International Airport is approximately 25 km. Kemayoran Airport phone: 47031.

TIME: The Port of Tanjung Priok is located in the zone of Western Indonesian Time, which is based on the time at the meridian of 105° East Longitude.

POLICE/AMBULANCE/FIRE: Fire 291399; Security 291691/291459; Ambulance 291045/290097.

CREW IDENTIFICATION CARD: Crew members having no passport are required to carry a Seamen Identification Card (S.I.C.).

PORT SECURITY: Maintained by members of the Indonesian Armed Services, usually Police, Navy or Marine and Army. Crew members should be in possession of a shore pass issued by the Port Authority, accompanied by an identification card when leaving or entering the guarded gates of the Port Area. Shore passes can be obtained via the Agencies.

AUTHORITY: Port Administrator.

KIDJANG: 00.51 N. 104.37 E. (See Plan Book)

LOCATION: The Bauxite Loading Port of Kidjang is situated at the S.E. coast of Bintan Island in the Riau Archipelago, in the position of 00° 50′ 44″ N. and 104° 36′ 31″ E.

FLAGS: To be flown by incoming vessel:

Vessel's National Flag.
Indonesian Flag.
Vessel's Number.
Quarantine & Immigration Flag. ("Q" and "N").

DOCUMENTS: To be produced upon vessel's arrival:

12	Crew Lists
4	Passenger Lists (if any).
4	Parcel Lists (if any).
4	Store Lists.
4	Cargo Manifests.
4	Narcotic Lists.
2	General Information.
4	Fire Arms & Ammunition Lists.
4	Personal Effects Lists.
2	Vaccination Lists.
1	*Declaration of Health Certificate.
2	*Harbour Reports.
	International Load Line Certificate.
	Certificate of Registry and Tonnage.
	Certificate of Vessel's Nationality.
	Safety Equipment Certificate.
	Seaworthy Certificate.
	Safety Radio Telegraphy Certificate.
	Derating Certificate.
	Last Port Clearance.
	*Forms to be supplied by Agents.

Inspection Team: This team consists of the Port Health Officer, Customs Officer, Harbour Master and Immigration Officer.

After the vessel is granted free pratique, the Immigration Officer checks passports, seamen's books & crew list and issues shore passes.

PILOTAGE: One Government Pilot available. Pilot compulsory.

Pilot's office : c/o Port Administration Tanjung Pinang.
Priority : First come first served.

There are 3 Pilot Stations:

1. Tanjung Pinang:	00° 53′ 47″ N.	104° 24′ 10″ E.
2. Tanjung Tillie:	00° 48′ 12″ N.	104° 35′ 30″ E.
3. Temborak Laut:	00° 49′ 00″ N.	104° 41′ 30″ E.

If vessel wishes to be piloted to the port on arrival day, vessel has to arrive at the desired Pilot Station as mentioned hereunder:

1. Tanjung Pinang: Not later than 1600 hrs. local time.
2. Tanjung Tillie: Not later than 1800 hrs. local time.
3. Temborak Laut: Not later than 1600 hrs. local time.

However Tanjung Tillie or Temborak Laut Pilot Station are preferable to Tanjung Pinang.

In case vessel is long overdue (3 hours delay after Master's last ETA cable), Perbaki shall charge compensation for keeping labourers, waiting, etc.

RESTRICTIONS: The height of vessel from waterline to top of hatch coaming or railing must not exceed 12.00 m. Each side deck breadth from bulwark to king post or mast must not be less than 5.50 m. and from bulwark to hatch coaming must be preferably 7.00 m. min., and 9.00 m. max.

MAX. SIZE: LOA 185 m. Max. draft 11.00 m.

Greater than the max. draft and LOA exceeding 185 m. might be possible after consultation with the Pilot/Harbour Master and considering the depth at entrance of the port upon departure.

RADIO: Cables to Perbaki Tanjungpinang can be sent through Dumai Radio Station, Call Sign "PKP" or through Tanjung Pinang Coastal Radio Station, Call sign "PKJ2", with working frequency/time:

8734 Kc/s 0100 hrs. — 0130 hrs. GMT.
8734 Kc/s 0500 hrs. — 0530 hrs. GMT.
4295 Kc/s 0130 hrs. — 0145 hrs. GMT.
4295 Kc/s 0230 hrs. — 0245 hrs. GMT.
4295 Kc/s 0430 hrs. — 0445 hrs. GMT.
4295 Kc/s 0830 hrs. — 0845 hrs. GMT.
Local Time — GMT plus 7 hours.

Arrival Notice: Owner's advise: Owner to advise by cable to Anekatambang Jakarta and Perbaki Tanjungpinang at least 8 working days notice of vessel's ETA at loading port.

Master's advise: At least 48 hours before vessel's arrival at desired Pilot Station, Master shall give the following information to Anekatambang Jakarta and Perbaki Tanjungpinang: Last port of call, draft on arrival, quantity of bauxite to be loaded, stowage plan (hatch division for bauxite cargo), quantity and kind of commodity (ies) to be discharged — if any — and other necessary messages.

Final amended arrival time must be sent at the latest 24 hours before arrival.

Previous experience showed that one cannot rely on telegrams regarding ETA sent by Agents at last port of call arriving in due time, therefore Perbaki Tanjungpinang waits for the Master's telegram in order to make necessary preparation such as ordering Pilot, etc.

Availability of berthing space: The availability of berthing space will be confirmed by Sub-Agents.

TUGS: Available and compulsory.

BERTHING: Vessels are moored alongside 2 jetties and 7 dolphins with good nylon ropes, 5 fore, 5 aft, 1 forespring, 1 after spring, 1 fore breastline and 1 after breastline. For Spring tide a hercules wire rope (extra) is obtainable.

Same will be carried out from the Southern part of Perbaki's jetty and serves then as additional breastline. If a vessel has not got sufficient lines, same may be hired from Perbaki.

When moored alongside jetties, vessels must take special care of the moorings during hours of ebb-tide, which runs in S.-N. direction.

Due to strong current in Strait of Kidjang the ship's Master is kindly requested to pay attention to Sub-Agents advices.

Vessels of over 20,000 d.w.t. will need extra 2 stern and 2 head lines.

Shifting Ship: Shifting ship will be done during slack water only by utilizing ship's gear and with assistance of tugboat if necessary. But to finalize loading as scheduled in stowage plan, shifting may be done even during unslack water using vessel's engine.

Jetty: There is no quay. Vessels are moored alongside 7 dolphins and 2 jetties.

Distance between the 2 extreme dolphins is 135 m.

Loading Facilities: Loading installation consists of 2 loading conveyors or stacker. Bauxite is loaded in the hold of vessel by means of conveyor belt.

Stacker can be moved vertically from 13° to 35°, but the maximum position for proper operation is only up to 18° inclination angle.

Each stacker can swing 16.00 m. (7.50 m. to inner side and 9.00 m. to outer side).

Distance between the 2 stackers in parallel position is 50.00 m.

The minimum distance between the end of stacker is 36.00 m. and the maximum is 68.00 m. (if there are king posts near bulwark, these distances might be less).

The length of stackers is 47.79 m. each. At the lowest position (13°) the end of stackers outreach about 10.50 m. from jetty seaward. (In this position the height from water line to the end of stackers is about 13.0 m. HWS).

Loading Capacity: About 500-600 t.p.h. for each stacker, however, it depends on the type of vessel, available cargo space, size of hatches, duration of trimming by bulldozer, etc.

Weighing: The bauxite is automatically weighed during loading by weightometer. The specific gravity of bauxite is around 1.25 and stowage factor around 29.

Unloading: Cargo for Aneka Tambang only.

STEVEDORES: Labourers will be supplied by Perbaki. Making the vessel ready for loading/unloading to be done by vessel's Crew members.

Loading is performed by Shipper's personnel. Loading/unloading equipments to be furnished by the vessel.

If necessary and at vessel's request, trimming of the bauxite can be done by bulldozer, except in deep tanks, cross bunkers, small hold in which bulldozer cannot operate.

Weight of bulldozer is 5 tons, so double gear is compulsory when loading, discharging or shifting bulldozer.

In hold where bulldozers are going to operate, all beams of upper as well as lower tween decks have to be removed.

This has to be done by vessel's Crew members. Loading/unloading and shifting bulldozers (with engine off) to be done by vessel's Crew members.

The vessel is responsible for any damage to the bulldozers while loading/unloading or shifting.

Working Hours: Loading/unloading to be effected with Customary Quick Despatch (CQD) on weather working days, whereby Sundays, Holidays, Governmental Local Holidays and Saturdays between noon and midnight and Monday between 0000 hrs. and 0800 hrs., are always excepted.

At Shipmaster's request, work on these days can be arranged. The Ordering Party will pay the overtime charge on these excepted days.

MEDICAL: Doctor, hospital and inoculation service available.

FRESH WATER: Not available.

FUEL: Not available. The nearest bunker station is at Pertamina Tanjung Uban (Bintan Island), North Secton of Riau Strait.

Lubricants: None. In emergency cases, a limited quantity will be made available in drums.

TIME: GMT plus 7 hours.

CUSTOMS ALLOWANCES: Vessel's bonded store will be sealed by Customs Officer on arrival and will remain sealed until the vessel leaves Kijang port.

Note: It is recommended that ship's Master consult the Agents about the local prevailing Customs Regulations with regard to currency, cigarettes, spirits, narcotics, etc., to prevent unnecessary difficulties and eventually fines.

REPATRIATION Can be arranged.

AIRPORT: Domestic airport about 9 miles from Kidjang. There are 4 regular flights from the said airport to Jakarta. Also a daily ferry service is available from Tanjung Pinang to Singapore. Sailing time about 4 hours.

CONSULS: None.

SHORE LEAVE: *Shore Pass:* Shore pass must be carried by Crew members during shore leave.

Invitation: Vessel's Crew members are strictly prohibited to invite friends, hawkers from shore aboard the vessel.

Anchorage: While lying at anchor waiting for berth no one is allowed to go ashore as long as vessel is not cleared.

It is also prohibited to lower lifeboats or rafts for the purpose of fishing, sailing, visiting nearby islands etc.

Leaving for Kidjang and Around: Permitted.

SERVICES: *Cash Advances:* At Master's request can be supplied by Agents in a reasonable amount.

Fumigation: No facilities.

Ship's Chandlers: None. In emergency cases, Perbaki can act as ship's chandler for a limited quantity.

GENERAL:

Depths: Entrance: 10.50 m. LWS; Alongside jetty: 11.00 m. LWS

Current: Direction: At high tide, from North to South; At ebb tide, from South to North.

Velocity: Around 2–6 knots.

Chart: Indonesian Sea Chart No. 42, 44A and 44B.

Nature of bottom: Sand and soft materials.

Density: Approx. 1020.

AGENCY:

1. *General Agents* (Head Office): PT Aneka Tambang.
Jalan Bungur Besar 24–26
P.O. Box 2513, Jakarta, Indonesia.
Cable address: Anekatambang Jakarta.
Telex: Antam JKT 46323 Jakarta.
Phones: 360011 — 360019 — 360027 — 360035.

2. *Sub-Agents:* PT Aneka Tambang Unit Pertambangan Bauksit, Kijang.
Address: Kidjang Tanjungpinang.
Cable Address: Perbaki Tanjungpinang (through Tanjung Pinang Radio Station Call Sign PKJ2 or Dumai Radio Station Call Sign PKP).

MPS Tax: So called MPS Tax (freight tax) has to be paid in advance to the Indonesian Tax Office at Jakarta, through the General Agents, Jakarta at the same time with the remittance of advance payment.

The amount of MPS Tax (about 2% of the concerned freight earned) will be advised by the General Agents, Jakarta to the Principals, if possible a few days before Principal remit advance payment.

The final calculation of the MPS Tax will be made later.

Disbursements:

Advance Payment: At least 14 days before vessel's arrival at Kijang, vessel's Principals have to remit US $3,000 to the account of PT Aneka Tambang Jakarta as General Agents, at Bank Dagang Negara Gambir Branch Jakarta (Telex: Stacob J.44132 Jakarta), as advance payment of the related ship's disbursement, and inform PT Aneka Tambang, Jakarta and Perbaki Tanjung Pinang about the remittance accordingly.

Vessel's Disbursement Account: All vessel's expenses will be charged to the related Principals through the Vessel's Disbursement Account Statements.

SHIPMASTERS REPORT: 1977.

Vessel's Dimension: Length 185.5 m. Beam 25.5 m.

Vessel sailed after loading wet bauxite ore in bulk. Vessel has previously visited the port 3 times and loaded to a draft of 11.2 m., however, due to poor tides loaded draft this voyage was 10.8 m.

Entrance to the port is from the North between Mapor Island and Merapas Island. The channel is clear and swept to 13.5 m. (chart datum) there are no navigational problems and Pilot boards in position 00° 50′ N. and 104° 43′ E. Also one can proceed onwards to the North of Kambat and Rusa Islands and then between Gabi and Riau to Tanjung Tillie anchorage. This is the accepted Pilot boarding ground and pilotage is compulsory and daytime only. The Pilot is accommodated at Tanjung Pinang but drives by car to the bauxite terminal and takes a launch from there to the vessel. He may not board upon arrival of vessel if the tide is unsuitable for berthing, as the ebb tide can reach 8 knots in Selat Kijang. There are 3 tugs available which are small, but quite adequate for berthing. The vessel proceeds past the berth then turns so as to berth starboard-side alongside. Moorings consist of 6 headlines, one breast line and 2 springs forward and 3 springs and 6 stern lines aft. Nylon lines are in position and can be hired as needed from the shore. The loading arms are fixed and shifting of the vessel is carried out at slack water.

Communication can be difficult at times. Tanjung Uban functions for 15 minutes in the hour and is not normally raised until day of arrival. All cables are sent through radio "PKI" Jakarta and seem to arrive at their destination. If possible despatch 3 copies of the Crew List to the port in advance as this speeds up clearance on arrival.

AUTHORITY: Dept. of Sea Communications.

LABUANTRING BAY: 08.44 S. 116.04 E.
AMPENAN: 08.34 S. 116.04 E.

DOCUMENTS:

Health Certificate.
1 Vaccinations List (Smallpox and Yellow Fever, Cholera/Typhus).
9 Crew Lists.
7 Passenger Lists (landing/transit).
4 Lists of Personal Effects.
7 Ship's Store Lists.
2 Cargo Manifests (discharge/transit).
4 Dangerous Cargo Lists.
1 Stowage Plan; all to be signed by Ship's Master and/or Chief Officer.

PILOTAGE: Normally not provided. When Pilot required, vessel must request via Agent or via Ampenan Radio at least 24 hours before arrival. Pilot service will then be given by Harbour Master from Ampenan to Labuantring Bay.

ANCHORAGE: Overseas vessels not familiar enter Labuantring Bay, normally calling Ampenan awaiting particular information and/or Pilot to enter Labuantring Bay (outer buoy). Good holding ground in about 16 m. Vessels with a draft of more than 6 m. must keep clear from channel to inner harbour. Navigating in channel without Pilot may cause difficulties; channel equipped with buoys, depth approx. 7 m.

APPROACHES: When approaching Ampenan, harbour is marked by light tower. Excellent holding ground in about 16 m.

RESTRICTIONS: Vessel may enter Ampenan and Labuantring Bay (outer buoy) day and night. Vessel not visited by port authorities between 1800 hrs. to 0700 hrs. (local time), exceptional cases allowed. Vessels are not allowed enter into inner harbour (Labuantring Bay) after sunset.

WEATHER: November till April rainy season. Quite heavy winds and rain can affect cargo work.

HEALTH: Pratique granted by port doctor after boarding vessel. Vessels from an infected port have to hoist "Q" flag. If any suspected disease or fever on board, necessary inform Agent by cable or via radio station. Treatment of crew members for illnesses other than quarantinable diseases arranged by Government's practitioners through ship's Agent.

TUGS: 1 tugboat of 125 h.p. 2 motor launches only, for cargo handling purposes.

RADIO: Ampenan Radio. Call sign PKD 9. Freq. 500 kc/s. and 430 kc/s. Times GMT: 0000–0100, 0500–0600: except Friday and Saturday: 0000–0100, 0900–1000. Sunday and holiday closed.

BERTHING: Length of quay at Labuantring Bay approx. 40 m. Vessels with a length of less than 100 m. and a draft of less than 6 m. may berth safely. Berthing at Ampenan (anchorage) for all sizes of vessel.

MEDICAL: Cable or radio before arrival if medical assistance necessary on entry. Government's hospital facilities available. Some specialised surgery is not. Smallpox vaccination and Yellow Fever Certificates inspected on arrival.

TANKERS: Berthing at Ampenan.

FRESH WATER: Not available.

FUEL: Not available.

SHIP'S CERTIFICATES: Registered Tonnage Certificate, Load Line Certificate, Safety Radio Certificate, Safety Equipment Certificate, Light dues Receipt, Deratisation Certificate, Clearance from previous port, all to be shown on arrival.

IDENTIFICATION CARDS: All crew's passports must be certificated by Immigration Officer on arrival, whereafter to be used as shore passes.

GANGWAY/DECK WATCHMEN: Usually employed during loading and discharging operations.

CARGO GEAR: Wire and rope-slings, nets and net-slings, lighters all supplied by stevedores except rain-tents. No shore cranes available. Loading and discharging using ship's derricks.

STEVEDORES: Ordered by Agent. To enable Agent ordering necessary gangs, vessel must give accurate ETA at least 24 hours in advance. Working on Sunday and holidays allowed by agreement in exceptional cases.

OPENING/CLOSING HATCHES: Normally carried out by stevedores; ship's crew may if required by vessel to do so.

CUSTOMS ALLOWANCES: No restrictions. Custom's Officer supervises opening and resealing of bond.

CONSULS: None available locally.

AIRPORT: Served by regular airlines to Bali and Java.

TIME: GMT plus 8 hours.

HOLIDAYS: 1st January; Independence Day (17th August); Christian, Islamic and Balinese holidays as appointed by the Indonesian Government.

GENERAL: Vessels should not use ship's radio station. Harbour Police and Customs' guards on board during ship's stay in harbour.

SHORE LEAVE: Crew allowed ashore; passports required whilst ashore.

DELAYS: Normally minimal.

MACASSAR: 5.05 S. 119.24 E.

DOCUMENTS:

Certificate of Registry.
Crew List.
Log Book.
Certificate of Seaworthiness.
Certificate of Plimsoll Mark.
Radio Certificate.
Health Certificate.
Equipment Certificate.

Shipping documents as follows:

Manifest of Cargo.
Bills of Loading.
Charter Party (if necessary).

PILOTAGE: Compulsory for all vessels, who have to use Port Administration's tug-boat. To order Pilot contact Macassar Radio, call sign PKF. Besides, Agent contacts the Harbour Master (Inspektur Keselamatan Pelajaran). Pilot boards vessel at anchorage, about 1 mile off shore. Exact area where vessel waits for Pilot or anchorage is between Lae-Lae Island and Samalona Island. Depth of anchorage is 3 fathoms.

RESTRICTIONS: Every ship needs permission from Dit. Dken. Perhubungan Laut (General Directorate of Sea Communication) to enter Macassar Harbour. When ship has no permission, Agent must apply to Port Authority and give details of ship, i.e. name of vessel, nationality, name of shipping enterprise, ETA, ETD, last port of call, next port of call, loading or discharging and aim of entry. No entry after 1800 hrs.

MAX. SIZE: No limit on length or breadth. The port consists of 2 bases; Base No. 1, 1,360 m. long and Hatta Base, 550 m. long. Draft at Base No. 1. 8 m. Draft at Hatta Base 9 m. Besides these bases there is a special pier for oil carriers outside main port area not far from Base No. 1.

HEALTH: Every vessel must have a certificate of health on board. When vessel enters a member of Port Health Authority boards. If there is any disease on board the vessel must go to quarantine area.

RADIO: Macassar Radio with call sign PKF.

TUGS: 1 tug *Anggada VII*. Used for vessels of 5,000 d.w.t. or over, and 4 tugs of smaller size.

STEVEDORES: Stevedoring by shipping enterprise or shipping enterprise agent. Capacity for discharging about 20 tons every gang/hour. No heavy cranes.

MEDICAL: Doctor and clinic available.

FRESH WATER: Ground-pipe with 10 t.p.h capacity. Barge with machinery pump 25 t.p.h. capacity.

FUEL: Fuel capacity in a day 400 tons.

DEVELOPMENTS: In near future, Macassar to have bonded warehouse.

GANGWAY/DECK WATCHMEN: There are no special deck watchmen services but can be arranged through Agent.

OPENING/CLOSING HATCHES: Work carried out by stevedores.

CUSTOMS ALLOWANCES: Tobacco – only sufficient for personal use. Wine and/or spirits – none permitted out of bond.

CARGO GEAR: Local regulations comply with Bureau of Classification with which vessel registered.

IDENTIFICATION CARDS: Identification cards needed by Immigration Office.

CONSULS: None available locally.

REPAIRS: Minor deck or engine repairs possible.

AIRPORT: Macassar Airport, called "Mandai Airport" Distance from town about 23 km. Services (1) Macassar – Kendari and (2) Jakarta – Surabaja – Macassar – Manado 3 times a week.

TIME: Middle Indonesian Time. GMT plus 8 hours.

HOLIDAYS: Every Sunday; New Year (1st January); Idul Adha (27th February); 1st Muharam 1389 H. (19th March); Isa Almasih (15th May); Maulud Muhammad (29th May); Sancta Maria (15th August); Proclamation Day (17th August); Mikradj Muhammad (9th October); Idul Firit (11th and 12th December); Christmas Day (25th December). Work can be arranged at overtime rate.

POLICE/FIRE/AMBULANCE: Police, Fire 4306; Ambulance 7227.

TELEPHONES: No arrangements exist for placing telephones on board.

SHORE LEAVE: Crew members are allowed ashore.

DELAYS: Caused by rain; no mechanical equipment for cargo handling.

AUTHORITY: Departemen Perhubungan, Direktorat Djenderal Perhubungan Laut, Port Administrator Macassar.

MALILI: 02.39 S. 120.59 E. (See Plan Book)
MANGKASA: 02.44 S. 121.04 E. (See Plan Book)

OPERATOR: P.T. International Nickel Indonesia (P.T. Inco).

LOCATION: Malili and Mangkasa Tanker Terminal are situated in the Gulf of Bone, South Sulawesi about 300 miles N.E. of Ujung Pandang.

Malili:

Malili port is situated in the Gulf of Bone, South Sulawesi about 5 miles from Mangkasa sea tanker terminal.

Vessels arriving at Malili port must remain in the roads anchorage area which is about 02° 42′ 00″ S. and 120° 59′ 00″ E. and having average depth of more than 20 m. (LWS)

This port *is to be assigned for* dry general cargo discharging and loading of nickel ore.

The sea chart to be used is Indonesian Chart No. 319 and all vessels calling at Malili port must call first at Ujung Pandang for clearance.

Mangkasa Sea Tanker Terminal:

The terminal is located at 02° 44′ 25″ S. and 121° 04′ 00″ E. This terminal is provided for tankers of about 20,000 d.w.t. which are to be equipped with hose lifting derrick at the port side manifold.

The sea terminal itself consists of a four-buoy mooring.

The hose has a diameter of 12 in. and fitted with 12 in. × 150 lb ASA flange. The submarine pipe diameter is 20 in.

FLAGS: In accordance with the practice in Indonesian ports, the vessel's national flag, the Indonesian courtesy ensign, quarantine, immigration, Pilot and call sign flags must be displayed by all vessels approaching the port. These signals shall be displayed continuously until clearance is granted.

The above mentioned signals are:
Sunrise to sunset: quarantine flag "Q".
Sunset to sunrise: signal lights red over white.

The flag "N" should be flown until the Immigration Officer boards the ship. The "G" flag should be flown until the Pilot boards.

The vessel should also fly its call sign until the vessel is secured in the berth. These call sign flags must be flown again when the vessel is sailing until the vessel is clear of the anchorage area and the Pilot has departed.

The "G" flag should be replaced by "H" flag if the Pilot is already aboard the vessel.

The "P" flag may may be flown if the vessel is going to sail within 24 hours.

DOCUMENTS: Indonesian Immigration, Customs and Port officials will board the vessel to grant clearance. Each crew member should be in possession of an International Vaccination Card and passport.

The following documents may be required for granting pratique for the vessels arriving from foreign ports:
Certificate of Registry.
Ships Construction Certificate.
Load Line Certificate.
Safety Equipment Certificate.
Safety Radio/Telephone/Telegraph Certificate.
Exemption Certificate.
Cargo Gear Certificate and Deratting Certificate.

The last port clearance and Crew Lists are also required.

Flag Dispensation: All foreign vessels entering Indonesian ports must have requested and been granted Flag Dispensation prior to the arrival at the port. Also a loading or discharging permit must have been applied for from the authority concerned. All this will be done by the general Agent.

PILOTAGE: A Mooring Master will board the vessel in the anchorage area and advise the Master on all manoeuvres relative to berthing and unberthing and connecting the hoses.

Vessels are requested to make a lee and have an accommodation ladder long enough to reach the Mooring Master's launch. At night adequate lighting should be provided.

MAX. SIZE: The tanker buoy mooring is designed for a vessel of 20,000 d.w.t., 26,700 tons displacement, LOA 600 ft., and max. draft of 31 ft.

RADIO: *Notice of Arrival:* 72 hours prior to the arrival at Malili or Mangkasa tanker terminal, the Master has to cable his ETA to "Inco Ujungpandang" through Ujung Pandang coastal radio station which then, will be passed on to Malili or Mangkasa coastal radio station.

The Master has to reconfirm or amend the ETA 48 hours and 24 hours before arrival at the port.

The cable address of "P.T. International Nickel Indonesia" (P.T. "Inco") of Ujung Pandang is Nikel Indonesia Ujung Pandang.

The coastal radio station of Ujung Pandang has the following particulars:
Name of station: Ujungpandang Radio.
Call sign: PKF.
Frequency: 465–500–8686–13101 Kc/s (A1), and 4409–2182–6518.6–8738.4 Kc/s (A3).
Power: 1 KW.
Service hours: See book of Indonesia Coastal Radio Stations.
Geographical location: 05° 06′ 30″ S. 119° 26′ 20″ E.

Details of Cable: The information cable should give the following data:
1. Name of vessel and radio call sign.
2. ETA in GMT and date (local time, GMT plus 8 hours).
3. The quantity of cargo to be discharged.
4. Maximum discharging capacity (for tanker only).
5. Vessel's draft on arrival.
6. If there is any sick crew on board or clean bill of health.
7. Last port of call.
8. Any hull, bulkhead or valve leakages which may cause pollution (for tanker only).
9. Distance in feet from bow to vessel's manifold connection.
10. Flange dimensions of vessel's manifold.
11. Any requirements such as provisions, fresh water, etc.

Language: The languages used are: Indonesian and English.

BERTHING: Mangkasa Sea Tanker Terminal: Mangkasa sea tanker terminal is an offshore system with 4 fixed anchors connected to buoys which have a quick release mooring system. Buoys are located to suit 20,000 tonners with 2 buoys on the bow and 2 buoys at the stern. These buoys are not lit.

Connection to tank farm is via 12 in. flexible hose joined to 20 in. undersea pipe to the tanks. The flexible hose is fitted with a 12 in. × 150 lb ASA flange. 8 In. and 10 In. reducer fittings are available.

If the jetty of Mangkasa tanker terminal or "four mooring buoys" is unoccupied and has been fixed for certain vessel, the vessel will be boarded by a Mooring Master in the anchorage area providing that the vessel in all respects ready to commence discharging her cargo. The NOR tendered by the Master concerned will be accepted at the time the Mooring Master boards.

Anchoring: A vessel which has to anchor on arrival due to certain circumstances has to inform the Port Control of her exact time of arrival at the port. This is important for adjusting the acceptance of the NOR tendered, providing:

1. It is within daylight i.e. 0600 to 1800 hrs. local time except if night berthing is possible. The NOR is considered to be accepted at the time the Mooring Master boards. Should the vessel have been at anchor, NOR is also accepted at the time the anchor is aweigh providing the Mooring Master is already onboard the ship.
2. It is not a public holiday or Sunday, unless the vessel is actually handled on that day.
3. the port is still open.

In addition to the above conditions, vessels arriving at an unreasonable time ahead of their last signalled estimated time of arrival will not be accepted.

Exact Time of Arrival: It is stressed that every Master has to advise the Port Control of his exact time of arrival to avoid unfavourable situations.

Work Crew Service: Mooring and unmooring, lifting, lowering, connecting and disconnecting hoses will be done by a terminal work crew under the direction of the Mooring Master. Assistance from ship's personnel in operating windlasses, winches etc., will be required.

Tanker Engines and Hose Lifting Derrick: Being an open roadstead, vessels must keep engines on stand-by during their stay in the berth. No repairs to main engines may be undertaken while in berth. Power must be kept on deck winches in case adjustments to mooring lines are found necessary. Ship's booms and deck winch must be capable of operating with a SWL in conformance with table shown on Page C2 of Appendix C to the International Oil Tanker and Terminal Safety Guide. Vessels with inadequate hose lifting equipment will be rejected.

Safety: Every vessel which berths at the buoys shall remain under the charge of the Master who will take all steps necessary to preserve the safety and security of such vessel, crew and terminal personnel who may board in the execution of their various duties.

The Master of every vessel at anchor in the designated anchorage or secured to the mooring buoys shall ensure that all parts of the vessel to which any person may be lawfully required to proceed are properly illuminated.

Efficient and easy means of access shall be provided to every vessel at anchor and at the mooring buoys and such access shall be adequately illuminated between sunset and sunrise.

No person(s) shall be permitted to board or leave the vessel other than by the gangway or other proper means provided for the purpose.

The Mooring Master may require the vessel to unmoor at any time he deems necessary for the safety of the vessel or the moorings or both or for infringement of Port Regulations.

Unsatisfactory conditions will be reported to the company's Marine Superintendent, who is empowered to reject a vessel for future calls unless the reported deficiencies have been remedied.

Sufficient crew members must be immediatley available at all times to assist with any or all operations on board the vessel at the terminal.

MEDICAL: Treatment possible at the Iron projects hospital.

FRESH WATER: Not available.

FUEL: Not available.

CONSULS: None.

REPATRIATION: Crew changes especially foreign crew are difficult to arrange.

REPAIRS: No facilities.

CUSTOMS: Cigarettes, cigars, tobacco, matches, spirits, wine, beers, perfume, arms, ammunition and possibly other items have to be locked up under Customs and sealed from time the ship arrives in port until she leaves territorial waters.

Each person is allowed to bring in 200 cigarettes or equivelent in grams of tobacco or cigars. Special allowances are made for the Master under special circumstances. The Customs officials will seal the stores.

SERVICES: Provisions and stores not available.

AIRPORT: P.T. "Inco" operate a charter flight between Malili and Ujung Pandang (formerly Makassar) twice a day with a Cessna type aircraft, flying time 1 hour.

GENERAL: *Chart:* Chart for the area is the Republic of Indonesian Chart No. 319 (The Gulf of Bone).

Facilities: Malili region in which nickel ore mine exploration is taking place is a newly opened region, isolated in the middle of the jungle. It is, therefore, not surprising if no facilities are available at present.

AGENCY: Owners have to appoint one of the Indonesian shipping companies as their general Agent for Indonesia. This shipping company will then appoint P.T. "Inco" to be their sub-agent for the port of Malili and/or Mangkasa tanker terminal to attend the arriving vessel.

The agency appointment which should be confirmed by official company letter which has to be received at least 10 days prior to the ship's arrival at Malili port or Mangkasa tanker terminal to give the general Agent a chance to arrange the necessary permits from the Indonesian government.

MUNTOK: 02.04 S. 105.10 E.

DOCUMENTS:

Register Book.
Load-line Certificate.
Deratisation Certificate.
Harbour Report.
Radio Certificate.
Nationality Certificate.
Safety Equipment Certificate.
Port of Call List.
Last Port Clearance.
Light dues Payment.
Health Book.
6 copies Crew List.
3 copies Store List.
6 copies Passenger List (if any).
Navy Book.
Next Port Manifest from every port.
Vaccination Certificate.
All loading Custom paper from every port.

PILOTAGE: Not available.
ANCHORAGE: Safe anchorage in 10 m.
RESTRICTIONS: None.
MAX. SIZE: 2 m. draft at quay length 100 m., breadth 30 m.
RADIO: Not available.
TUGS: 7 tugboats available for communication between shore and ships, with capacity 340 h.p. each.
BERTHING: Anchorage 165° Tg. Kalian, 2 miles from shore. Only small vessels draft 7 ft. alongside quays.
STEVEDORES: Ordered by Agent.
MEDICAL: Facilities available.
TANKERS: None.
FRESH WATER/FUEL: None.
CUSTOMS ALLOWANCES: 200 cigarettes per man; 1 bottle per man.
IDENTIFICATION CARDS: Not necessary.
CONSULS/REPAIRS/DRY DOCKS: None.
AIRPORT: None.
HOLIDAYS: On Moslem holidays, no cargo work.
SHORE LEAVE: After permit by Chief of Police.
REGULATIONS: Customs, Harbour Master, Police Maritime, visit ship on arrival.
DELAYS: Delays due shortage lighter space.

PALEMBANG: 02.59 S. 104.45 E.

DOCUMENTS: Upon arrival ships have to fill in the following Forms:

Harbour Report obtainable from the boarding Pilot, or from the Harbour Master.
Pilot's Certificate.

Upon arrival vessels have to produce the following Certificates and Documents, which will remain in the Harbour Master's custody until cleared:

Nationality (Registry) Certificate.
Seaworthiness Certificate.
Measurement (Tonnage) Certificate.
Deratisation (Exemption) Certificate.
International Load Line Certificate.
Safety Certificate (passenger ships).
Safety Equipment Certificate (cargo ships).
Safety Radio and Radiotelephony Certificate (cargo ships).
Certificate of Approval (ship's radio station).
Health Book or Bill of Health.
Last Port Clearance.
Subscription of Light and Harbour Dues and wharfage if any.
10 copies Crew List.
6 copies Passenger List.
2 copies Ship's Articles.
2 copies Store List.
Manifests.
Bills of Lading.

Maritime declaration to be completed by Master upon arrival, obtainable from boarding Quarantine officer, or via Agency.

ARRIVAL: 2 days before arrival of vessel, the ship's Agent has to inform the Port Administration, by completing appropriate forms. Copies of completed forms must also be submitted to the Harbour Master, Port Health Service, Immigration, Customs and Security for preparations of services.

Agent/Owners to advise Port Administration (Pilot Division) of vessels arrived 24 hours in advance.

PILOTAGE: Compulsory, consisting of Outer (River) and Harbour Pilot. Applications should be cabled to pilot vessel via Palembang Radio Station. Pilot vessel located at station position 02° 11′ 08″ S. 104° 57′ 08″ E.

The Pilot may berth the vessel on request of the ship's Agent only after obtaining clearance from the Port Administrator, Harbour Master, Port Health Service and Immigration (foreign vessels only).

Vessels arriving in afternoon and unwilling to navigate the river in darkness should not hoist the Pilot signal. The signal station is at the aforementioned pilot vessel, which answers the pilot signal as follows:
By night:

A flare-up light slightly over the railing, or waving with a white light means: Pilot will soon board the vessel. 1 red light vertical over a white light means: No Pilot available, vessel allowed to proceed until Pilot is met.
By day:

1. The international flag signal KYS from the International Code of Signal meaning: Pilot unable to attend due to motor defect or heavy seas. The Pilot can be picked up by ship's motor-boat.

2. The flag signal KKO meaning: No Pilot available, vessel allowed to proceed until Pilot is met.

Use of Harbour Pilot in Palembang is compulsory.

ANCHORAGE: *Musi Bar:* anchorage position 2° 08′ 30″ S. 104° 58′ 30″ E., in depth of 9 fathoms, used for topping up ocean tankers from river craft.

RESTRICTIONS: Palembang is 54 miles upstream. The main entrance is the river arm between Tg. Tjarat and Tg. Gedeh. Depths from sea to Palembang:

Outer Bar	45 DM at mean level
For incoming vessels Channel East of Pajung	42 DM
For outgoing vessels Channel West of Pajung	45 DM „ „ „
Channel South of the light-buoy South of Pajung	48 DM „ „ „
Bar of Kupang	50 DM „ „ „
Bar downstream of Kampung-Peradjen (9 miles from Palembang)	50 DM „ „ „
Bar downstream of S. Lais (opposite Kundur)	50 DM „ „ „

Incoming ships have priority in passing the Outer Bar from 2 hours to 1 hour prior to HW. From 2 hours to 45 minutes prior to HW, outgoing ships have to wait between Tangjung Gedeh and Tandjung Tjarat.

Channel East of Pajung for incoming ships.
Channel West of Pajung for outgoing ships.

MAX. SIZE: Max. length 185 m. Max. draft 7.5 m.
RADIO: Call sign PKC.

Time operating (GMT). Frequency 500/448 Kc.; 0000/0100, 0400/0500, 0800/0900, 1200/1300 hrs. Frequency 8706 Kc.: A.I 0100/0200, 0500/0600, 0900/1000, 1300/1400 hrs. Frequency 8799, 2 Kc.: A.III 0200/0230, 0600/0630, 1000/1030 hrs.

VHF Channel 16, 20, 22, 26 and 28. Time operating (local time) 0700/1330, 1500/1730, 1900/2100 hrs.

VHF:

Harbour Master	Channel 14
Pilot	Channel 12
Tugboat Operations	Channel Not known
Port Operations	Channel 12 – 16
Safety/Security	Channel 09 – 12 – 16

HEALTH: Vessels arriving from abroad have to apply well in advance from the Department of Health (Quarantine Section) for a provisional free pratique, as said pratique has to be cabled to the port. The provisional free pratique is only valid for this port, the next port of call must be a First Class Port as no further provisional free pratique will be issued, unless the vessel sails directly abroad.

TUGS: Vessels over 60 m. length are required to use at least 1 tug. 3 tugs available, 60 h.p., 650 h.p. and 1,100 h.p. 2 fire-fighting tugs at Pertamina, 750 and 850 h.p.

BERTHING: Anchorage in the vicinity of the quay, see chart for prohibited anchorage.

Harbour board quay: Berth length 450 m., depth alongside 5.5 m., depth front/middle 6/8 m.

Pusri wharf (fertiliser plant) Left Bank: Wharf No. 1, length 140 m. No. 2, 116 m. No. 3, 110 m. No. 4, 120 m. Depth alongside, 8 m.

Coal Wharf – Kertapati quay (Right Bank): Berth length 250 m., depth alongside 5.5 m. Situated 2.7 miles upstream from Harbour board quay.

Plaju and Sungai Gerong:

Wharf No.	*Length (m).*	*Depth (m).*
1	19	9
2	100	9
3	19	10
4	18	9
5	114	9
6	9	9
Lemabang	12	4.5
7	62	9
8	34	9
9	35	9
10	34	9
11	100	9
12	36	12

CRANES: *Palembang:* (Mobile cranes). 1 at 7 tons, capacity, 1 at 10 tons, 3 at 15 tons, 2 at 18 tons, 1 at 25 tons and 1 at 30 tons.

There are 17 fork-lift trucks available, capacity 2-15 tons.

Pusai: 2 mobile cranes, Capacity 5 & 7.5 tons 3 shore cranes, capacity 25,40 and 100 tons.

Plaju and Sungai Gerong: 3 Mobile cranes, capacity 15, 30 and 45 tons. 3 shore cranes, 1 at 15 tons and 2 at 5 tons.

MEDICAL: Hospital and First Aid available.

TANKERS: Pladju Terminal (Right Bank): Downstream of Harbour Board quay operated by P. N. Pertamina Unit II (Pladju) (ex-Shell).

Sungai Gerong Terminal (Right Bank): Downstream of Harbour Board quay, operated by P. N. Pertamina Unit II Sungai Gerong (ex-Stanvac).

DENSITY: 1000.

STEVEDORES: According to the requirements of the vessel concerned, labourers are requested from the U.K.A. (Port Labour Pool).

The usual working hours at the harbour are:

Monday – Thursday	0800 – 1200 hrs.
	1300 – 1600 hrs.
Friday	0800 – 1100 hrs.
	1300 – 1600 hrs.
Saturday	0800 – 1200 hrs.
	1300 – 1400 hrs.

Overtime is allowed on request.

FRESH WATER: Piped water supply is at 15/20 t.p.h., and through water barges is at 50/60 t.p.h. Water barge capacity 100 tons.

FUEL: Obtainable from Pertamina provided payment is arranged in advance through their Head Office in Jakarta. Delivery by pipe-line or barge.

REPAIRS: Facilities available.

PORT SECURITY: Maintained by members of the Indonesian Armed Services, usually, Police, Navy or Marine and Army. Crew members should be in possession of a shore pass issued by the Port Authority, accompanied by an identification card when leaving or entering the guarded gates of the Port Area. Shore passes can be obtained via the Agencies.

CUSTOMS ALLOWANCES: 200 cigarettes or 50 cigars or 100 grams of tobacco. There is no alcohol allowance.

TIME: The Port is located in the zone of Western Indonesian Time, which is based on the time at the meridian of 104° 46′ 36″ East Longitude.

AIRPORT: Talang Betutu Airport is approximately 12 km. from the port.

POLICE/FIRE/AMBULANCE: Security – 22386, Fire 20451/22386, Ambulance 22531.

IDENTIFICATION CARDS: Crew members having no passport are required to carry a Seaman's Identification Card (S.I.C.). A re-entry into country if there is no S.I.C.

REPATRIATION: A valid document is needed. A re-entry permit from the country concerned is sufficient, if there is no passport available.

CUSTOMS/NAVY REG.: Upon vessels arrival/departure, boarding team will come on board consisting of:

- 2 Navy Officers.
- 2 Customs Officers.
- 2 Health Officers (in case vessels coming from infected ports or abroad).
- 2 Immigration Officers (in case vessels coming from abroad only).
- 3 Clerks from Agents.

Nobody allowed on board until this team declares the vessel cleared.

AUTHORITY: Port Administrator.

PANARUKAN : 07.42 S. 113.56 E.

DOCUMENTS:

Port Clearance.
5 B/Model/Customs Clearances.
Customs papers.
Store List.
Crew List.
Passenger List.
Light Dues Certificate.
Seaman's Book and Health Certificate.
Ship's Registry.
Load Line Certificate.
Safety Radio Certificate.
Deratting Certificate.
Certificate of Nationality.
Tonnage Certificate.
Suez Canal Certificate.
Dispensation for Deck and Engineer Officers.

PILOTAGE: Nil.

ANCHORAGE: With bearings: Patjaron Hill, 275°; white light, 128°; red light, 187°. This anchorage leaves ship 300 m. from 20 m. line and over 500 m. from 7.5 m. patch.

RESTRICTIONS: No restrictions, vessel may enter and leave port at any time.

MAX. SIZE: In anchorage position draft permissible up to 15 m.

HEALTH: Pratique will be arranged by Agent and especially if the ship is just coming from a country suspected of special disease or fever, otherwise pratique is automatic and a quarantine doctor boards.

RADIO: *(a)* Coastal station: Call sign, PKD 2; medium wave, 500 kc/s.; WF, 474 kc/s.; working hours GMT, 2400–0100 hrs., 0400–0500 hrs. *(b)* Fixed station: Call sign, 8 AD 3; short wave, 8 Mc/s.; working hours GMT, 0100–0400 hrs., 0500–0600 hrs.

TUGS: Tugs join vessel at anchorage position. Vessel can use tug's lines and the Agent will arrange. Usual charge for use of tug's lines.

BERTHING: There are no berths alongside quays.

STEVEDORES: 24 hours before ETA advice needed to arrange gangs.

MEDICAL: Hospital facilities available, vaccination/fever Certificates for crew can be issued by authority.

FRESH WATER: No facilities.

FUEL: No facilities.

GANGWAY/DECK WATCHMEN: Available.

OPENING/CLOSING HATCHES: Carried out by stevedores.

CUSTOMS ALLOWANCES: No restriction as long as goods remain on board ship.

CARGO GEAR: All gear supplied by stevedores except rain tent.

IDENTIFICATION CARDS: Needed if crew going ashore.

CONSULS: No local representation.

REPAIRS: No facilities.

TIME: GMT plus 7 hours.

HOLIDAYS: Sundays, 1st January; 17th February; 9th March; 7th May; 18th May; 15th August; 17th August; 28th September; 30th November; 1st December; 25th December. Work cannot be arranged on 30th November and 17th August but on other holidays cargo work can be arranged.

SHORE LEAVE: Can be arranged.

PANJANG (Lampung): 05.28 S. 105.19 E.

(See Plan Book)

Well protected port at inner-end of Lampung Bay.

DOCUMENTS: Upon arrival ships have to fill in the following Forms:

Harbour Report (obtainable from the boarding Pilot, or from the Harbour Master's Office).
Pilot's Certificate.
List of Ship's Articles.
Ship's Store List.
Personal Effects List.
General Declaration of Cargoes Aboard Ship.

Upon arrival vessels have to produce the following Certificates and Documents, which will remain in the Harbour Master's custody until cleared:

Nationality (Registry) Certificate.
Seaworthiness Certificate.
Measurement (Tonnage) Certificate.
Deratisation (Exemption) Certificate.
International Load Line Certificate.
Safety Certificate (passenger ships).
Safety Equipment Certificate (cargo ships).
Safety Radio and Radiotelephony Certificate (cargo ships).
Certificate of Approval (ship's radio station).
Health Book or Bill of Health.
Last Port Clearance.
Subscription of Light and Harbour Dues and wharfage if any.
Crew Lists and Passenger's Lists.

PILOTAGE: Compulsory. Pilots are in Government Service. Pilot signals according the International Code of Signals. Boarding area is on the outer (West) side of a line of reefs, which extends from South to North on the West of the port. Pilot (4) can be ordered from the Port Administration via ship's Agents; Pilotage available throughout 24 hours.

APPROACHES: *Navigational Report:* Approaching Panjang there are numerous small fishermen's houses built on bamboo sticks at sea, some without lights. Therefore approaching or sailing from Panjang at night time should not be attempted.

ANCHORAGE: Panjang Roads; outer (West) side of the reef.

HEALTH: Vessels arriving from aboard have to fly the "Q" Flag (Yellow flag) until boarded and released by the Quarantine Officer.

Masters have to fill in the Quarantine Form and signed by him and the ship's surgeon, if any, and produce the following:

Health Book or Bill of Health.
Deratisation (Exemption) Certificate.
Valid International Vaccination Certificates of Crew members and Passengers.
Crew and Passenger's Lists showing the validity dates of above Certificates.

During the time that the "Q" Flag is flying no one is allowed to board or leave the vessel except with the permission of the boarding Quarantine Officer.

RADIO:

(a) Coastal Radio Station, Panjang Radio, call sign PKC 4 working hours GMT 0100 – 0230 and 0400 – 0530.

(b) Fixed station, call sign 8 AB2; working hours GMT 0230 – 0400 hrs. and 0530 – 0700 hrs.

(c) VHF radio telephone service operating on Channels 12, 14, 16 from Monday to Thursday, 0730 – 1430 hrs. local time. Friday 0730 – 1100 hrs. and Saturday 0730 – 1330 hrs. local time.

TUGS: 2 tugboats of 800 h.p. and 250 h.p. owned by the Port Administration; it is compulsory for ships to use tugboat in berthing and unberthing operation.

4 other diesel tugboats, from 100 h.p. to 230 h.p., owned by the PJKA (2) and the PT. Djarkarta Lloyd (2).

BERTHING: Quay A on the South side, length 172 m. and an average depth of 8 m. LW alongside.

Quay B on East side with a length of 110 m. and a depth of about 7 m. LW. This quay is partly used by PJKA (state owned railway company) vessels that serve the Panjang Merak route as regular ferry-boat service.

Quay E on the East side, length 20 m. depth 4 m. LW.

Quay D on the North side, length 200 m., depth 11 m. LW.

Quay C on the West side, length 140 m., depth 5 m. LW.

Oil jetty (timber-decked) for Pertamina tankers on the South of quay C, length 20 m. and depth of 6 m. Ocean vessels can also be berthed at 3 buoys in the Inner Harbour.

LIGHTERAGE: 16 lighters available, capacity between 70 and 170 tons, owned by Port Administration and Shipping Agents, can be hired for loading vessels at anchor or buoys.

STEVEDORES: There are 1,300 registered labourers; working hours 0800 – 1200 and 1300 – 1600 local time. Overtime possible after being granted by the authorities concerned; 24 hours per day working time recommended.

Gang's average capacity 20 t.p.h. for bulk work cargo and 15 t.p.h. for general cargo.

MEDICAL: Medical attention can be arranged through the Agents. There is a port doctor. The general hospital is in Tanjungkarang, about 13 km. away, where sick Crew members may be hospitalized.

TANKERS: 1 pier for tankers, length 20 m. No tank cleaning facility available.

FRESH WATER: Supply is handled by the Port Administration to the wharves through pipe-lines. All berths fitted with fresh water connections (6 hydrants). Capacity is normally about 72 t.p.h. No water barge available.

FUEL: Bunkering not available.

FIRE PRECAUTIONS: The Port Administration handles 1 fire-fighting truck and 1 fire trailer.

Smoking strictly prohibited in warehouses, inside the Pertamina yard, on oil-jetty, and on board tankers. During the time a tanker is discharging, fire extinguishers must stand ready on the pier.

CONSULS: No local representation.

REPAIRS: Minor repairs can be carried out.

DRY DOCKS: None available.

SURVEYORS: None available; no Classification Society is represented at the port.

GANGWAY/DECK WATCHMEN: None available.

OPENING/CLOSING HATCHES: Opening and closing of ship's hatches is normally carried out by stevedores.

CUSTOMS: It is strictly prohibited to take undeclared foreign currency ashore. It is recommended that Masters consult the Agent about the local prevailing Customs Regulations with regard to currency, cigarettes, spirits, etc., to prevent unnecessary difficulties and eventually fines.

CARGO GEAR: Loading and discharging effected by ship's gear. 6 mobile cranes, between 3.5 tons and 15 tons, are available from the Port Administration, as well as 17 forklifts (between 2 and 15 tons) owned by Port Administration and shipping Agents.

AIRPORT: Branti airport situated about 34 km. from Panjang. Regular (domestic) flights, Tanjungkarang–Jakarta v.v. 4 times daily.

TIME: GMT plus 7 hours.

HOLIDAYS: Fixed dates are: New Year (1st January); Independence Day (17th August) and Christmas Day (25th December). Other holidays: Idhul Adha, First of Muharram, Maulid of the Prophet Mohammad, Good Friday, Christ's Ascension, Mi'radj of the Prophet Mohammad and Idhul Fitri (2 days).

POLICE/FIRE: Telephone 31.491 (Harbour Police). 31113 or 52741 (Fire Brigade).

TELEPHONES: No arrangement exists for placing telephone on board.

SERVICES: No special service available.

SHORE LEAVE: Crew members are allowed ashore.

INDENTIFICATION CARDS: Shore passes needed, obtained via Agents.

DELAYS: Normal expected delays due to shortage of berthing facilities and rainy weather.

DEVELOPMENTS: 3 big companies (Government-owned and private) are making preparations for construction of cement-grinding factory, molasses-tanks, offices and godowns, all located on the North side of the harbour.

Quay D is planned to be extended with another 200 m. pre-stressed concrete quay, and additional transit sheds.

GENERAL: The port's status is general exports (rubber, coffee, pepper, timber, cattle fodder, corn, etc.)

Charts and nautical publication concerning this port are issued by the Indonesian Naval Hydrographic Office (HIDRAL).

Port security is maintained by the State Police.

All Government offices in the port (Except Customs) keep working hours as follows: Monday to Thursday 0730 – 1430, Friday 0730 – 1100, Saturday 0730 – 1330 (The Customs 0700 – 1600 hrs.)

Regular ferry-boat service, plying the Panjang-Merak (Jawa v.v. route, is held by 2 PJKA vessels, twice daily. Another ferry service on the same line is held at Serengsem (2 km. to the South of the port) by 4 ro-ro type ferry boats, the frequency is 5 times daily.

AUTHORITY: Port Administration of Panjang.

PANGKALAN SUSU: 04.07 N. 98.13 E.

PILOTAGE: Pilot obtainable.

TUGS: 2 tugs available, each of 400 h.p.

ANCHORAGE: Suitable anchorage for vessels up to 40,000 d.w.t. at outer bar.

BERTHING: Alongside wharf max. draft 5 m., overall length 95 m. Depth at low water spring 3 m.

TANKERS: Pertamina/Japanese Terminal: A single buoy mooring situated 17 km. offshore in 15 m. depth of water. Mooring designed for vessels up to 150,000 tons. Loading rate 3,000 t.p.h.

SHIPMASTER'S REPORT: December 1978.

Location: 04° 13′ 05″ N., 98° 24′ 30″ E.

Time: GMT plus 7 hours.

General: Normally weather is fair with moderate variable winds. But from November to March there are very often very strong North-easterly winds together with heavy rain showers and thunderstorms. There are 2 tides a day, following the coast-line. The current on flood tide sets from N-buoy to S-buoy, the ebb tide sets from S-buoy to N-buoy. The depths around the SBM inside of these buoys are between 18 to 25 m. Vessels up to 100,000 d.w.t. are berthed at the SBM. The density is approximately 1023.

For approaching B.A. Chart No. 1353 is used. The Operator of the Terminal is Pertamina, Pangkalan Susu.

Navigation: Agent in Pangkalan Susu is Pertaminaship. Cable address is Pertaminaship Pangkalan Susu. ETA cables should be sent 72, 48 and 24 hours prior to arrival. First ETA should include the requested cargo.

Pangkalan Susu Radio belongs to Pertamina. Call sign is "PKBZ". Frequency 6456.5 kHz, calling band 6 mHz. The working hours are from 0700 to 1900 hrs.

VHF Channel for calling (Susu Radio) Ch. 16, working Ch. 12, 19, 20 and 24 for information. No radio pratique.

On arrival vessel has to anchor 2 miles East of SBM. At the anchorage the Pilot boards with the Loading Master and 7 crew, after the vessel is cleared by the Port Authorities. All stay on board to assist berthing and connecting cargo hose, and vessel has to supply food and accommodation. Regarding food – they are all very strict Moslems. They will also stay until the loading operation is completed.

Pilotage is compulsory (Government Pilot). A vessel will berth only during daylight, but unmooring day and night. After which the vessel has to anchor to await cargo papers.

Vessel must arrive with sufficient clean ballast for berthing at the SBM. Pilot ladder only is required.

Berthing at the SBM is normal SBM procedure with messenger rope from the vessel to pick up 1 rope only from the SBM. Then 3 ship ropes, eyes going from the vessel to the SBM and then back to the vessel again. During the vessel's stay at the SBM one tug is made fast with the ship's rope aft and the tug keeps the vessel clear of the SBM.

Tugs: Three tugs are used as follows:

1 tug 300 h.p. for floating hose.
1 tug 300 h.p. for line handling during mooring.
1 tug 1,700 h.p. for towing the vessel off the SBM and keeping her clear during the whole operation.

Steam turbine vessels have to run their turbine with 3–5 revs astern during their stay at the SBM and the tug aft.

Wharves/Buoys: SBM Pangkalan Susu is situated on Lat. 4° 13′ 05″ N., and Long. 98° 24′ 30″ E. and has a diameter of 15 m. and a height of 4.4 m. The buoy is an orange colour and has a red light with 3 long flashes, also 1 floating hose with 12 in. diameter. The SBM is used for export production of Katapa Crude and North Sumatra Crude. Four buoys are situated around the SBM within 1,000 m. of the SBM. Their positions are as follows:

"N"–Buoy	Lat. 4° 13′ 38.5″ N.,	Long. 98° 24′ 30″ E.
"S"–Buoy	Lat. 4° 12′ 40.0″ N.,	Long. 98° 24′ 30″ E.
"E"–Buoy	Lat. 4° 13′ 04.0″ N.,	Long. 98° 25′ 30″ E.
"W"–Buoy	Lat. 4° 13′ 04.0″ N.,	Long. 98° 23′ 57″ E.

The depth of water is between 18 m. and 25 m. in this area.

Repairs/Dockyards: No repairs possible.

Supplies/Service: Provision supply possible. But no bunkers, water, deratting certificate, no Consuls, crew change or medical treatment available.

Cargo Operations: Terminal Operator is Pertamina, Pangkalan Susu. Cargo information can be received on Channel 19. Other informations on Channel 16 (Susu Radio) 19, 20 and 24. Loading rate 2,000 t.p.h., but can be reduced to 1,600 c.b.m. when necessary for topping tanks. One ×12 in. cargo hose is connected from SBM to ship's manifold, for connections, ship's derrick is used on portside with minimum 5 tons load (SWL). Seven crew with Loading Master assist for connecting the hose.

API=50.0 Temp.=85°F

One hour and again half-hour before completion of loading the Loading Master is to be informed. He will then stand by for stopping the cargo. All papers are typed on board the vessel and vessel has to supply typewriters, two if possible, to reduce the waiting time. After completion of loading the vessel will anchor about 1 mile off the SBM to wait for the cargo papers to be completed (about 2 to 3 hours).

Rescue/Distress: No salvage or Coast Guard available.

Port Authority: The vessel has to anchor about 2 miles off the SBM and the Custom Officials, Immigration, Quarantine Officer and Agent will board the vessel at the anchorage, about 12 persons in all. The authorities also clear the vessel if she is also bound for Kuala Beukah. For clearance the following are requested:

12 Crew Lists; 2 Vaccination Lists; 3 Stores Lists; 3 Crew Effects Lists; 1 Health Declaration; 1 Ship's Health Book for Indonesian Ports only, if not on board it will be issued by the authorities.
Approaches: The approach is very easy. The coast line gives a very good picture on the radar for navigation. But it is very difficult to pick up the SBM on the radar due to many fishing boats and fishing houses. The fishing boats will also interfere with the approach, especially during the night, many of them are showing no lights, until the vessel is very close.

PANGKALBALAM: 02.06 S. 106.08 E.

DOCUMENTS:
Register Book.
Load Line Certificate.
Deratisation Certificate.
Harbour Report.
Radio Certificate.
Nationality Certificate.
Safety Equipment Certificate.
Port of Call List.
Last Port Clearance.
Light dues payment.
Health Book.
6 copies Crew List.
3 copies Store List.
6 copies Passenger List (if any).
Navy Book.
Next Port Manifest from every port.
All loading Custom paper from every port.
Vaccination Certificate.

PILOTAGE: Not available.
ANCHORAGE: Safe anchorage at green buoy, 10 m.
RESTRICTION: No night entry. No anchoring at Eliot (red buoy).
MAX. SIZE: Length 140 m., breadth 30 m. Only steamers drafted 8 ft. allowed to discharge alongside the quays.
RADIO: Port radio station. Working times 0800–1300 hrs. except Sunday. Call sign PKC7.
TUGS: 1 tugboat available owned by P.N. Djakarta Lloyd for communication between shore and ships. Capacity 120 h.p.
BERTHING: Near green buoy, and as near as possible to shore. Sounding 10 m. Only small vessels 8 ft. draft alongside quays.
STEVEDORES: Ordered by Agent.
MEDICAL: Facilities available.
FRESH WATER: Not available.
FUEL: Not available.
CUSTOMS ALLOWANCES: 200 cigarettes, 1 bottle per man.
IDENTIFICATION CARDS: Not necessary.
CONSULS: None.
REPAIRS/DRY DOCKS: None.
REPATRIATION: Not available.
AIRPORT: Airport service by regular airlines 6 times per week.
HOLIDAYS: On Moslem holidays, no cargo work.
POLICE/AMBULANCE/FIRE: Police 386 SM; Ambulance 444 Otm; Fire 39 LB.
SHORE LEAVE: After permission by Chief of Immigration.
REGULATION: Every ship on arrival must be passed by; Customs, Harbour Master, Police Maritime, Health service and Chief Immigration.
DELAYS: Due shortage of lighter space.

POLENG: 06.39 S. 112.55 E.

SHIPMASTER'S REPORT: April 1978.
LOCATION: The Poleng Terminal consists of the tanker "Lynda" moored stern first to an SBS. The "Lynda" is a tanker of some 72,000 d.w.t. and is 5 years old. The position of the "Lynda" is 06° 38′ 42″ S., 112° 55′ 23″ E.
PILOTAGE: Performed by the Master of the "Lynda".
ANCHORAGE: The anchorage position is anywhere North and West of the "Lynda" distance 1 mile. The depth of water is 26 fathoms and 9 shackles of cable is recommended.
RESTRICTIONS: The "Lynda" is moored in 180 ft. of water and there is no restriction regarding the draft or the size of ship that she can accommodate alongside.
RADIO: The Post and Telecommunications Department do not permit the use of the WT/RT on the "Lynda" so all ETA's are sent via Pertaminaship Jakarta.

Once the "Lynda" receives the ETA they then organise the 'opening of the Port' and the officials to clear the ship are ordered from Surabaja. The usual documents are required and 2 Agents come out with the officials.
VHF: The "Lynda" keeps watch on Channel 6 and only monitors Channel 16 when a vessel is expected.
BERTHING: The "Lynda" has 4 "Yokohama" type fenders on her port side for berthing. Six ropes are required at each end. Berthing is port side alongside.

The "Lynda" is loaded direct from the well and the API is 55 with a loading temperature of 84°. Normally, the API is 42-47. The pumping capability of the "Lynda" is 2,000 t.p.h. although we were only able to get 1,557 t.p.h. The cargo is loaded through 1×12 in. hose.

Prior to loading the tanks on the "Lynda" are ullaged in the presence of the Customs and the cargo calculated. This is repeated at the end of the load for the Bill of Lading figures. Clearance is granted from Poleng and all documents are signed prior to sailing. There being no early departure available.

At present they are receiving 1 ship about every 2 months, mainly topping-off operations and it is thought that the vessel may be moved to another position.
FRESH WATER: Not available.
FUEL: Not available.
STORES: Not available.
GENERAL: No Walport film exchange. All shore personnel are accommodated aboard the "Lynda". Some vessels have parted their mooring lines during the Winter months with winds of 25 knots and 8-18 ft. seas running.

POMALAA (Tandjong Lepee): 04.14 S. 121.32 E.

(See Plan Book)

LOCATION: Port of Pomalaa, Kolaka, is situated in the Gulf of Bone, S.E. Sulawesi in position 04° 10′ 30″ S., 121° 36′ 00″ E.
LOADING POSITIONS:
Berth: 04° 10′ 30″ S., 121° 35′ 56″ E.
Anchorage position for ore loading at Pomalaa: Vessels of 15,000 d.w.t. and over, 04° 10′ 00″ S., 121° 35′ 24″ E. Vessels up to 15,000 d.w.t., 04° 10′ 06″ S., 121° 35′ 30″ E.
Anchorage position for ore loading at Tanjung Leppe: 04° 13′ 38″ S., 121° 32′ 31″ E.
FLAGS: To be flown by incoming vessels: Vessel's National Flag; Indonesian Flag; Vessels numbers; Quarantine & Immigration Flag.
DOCUMENTS: To be produced upon vessel's arrival:
14 Crew Lists
4 Passenger Lists
5 Parcel Lists
5 Store Lists
8 Cargo Manifests
3 Narcotics Lists
5 General Information
5 Personal Effects Lists
5 Vaccination Lists
5 Fire Arms & Ammunition Lists
International Load Line Certificate
Maritime Declaration of Health Certificate
Health Book or Bill of Health
Derating Certificate
Last Port Clearance
Safety Radio Certificate
Harbour Report.

Inspection Team: This team consists of the Port Health Officer, Customs Officer, Harbour Master and Immigration Officer.

After the vessel is granted free pratique, the Immigration Officer checks passports, seamen's books and crew list and issues shore passes.
PILOTAGE: Pilotage is not compulsory and there is no Pilot at Pomalaa. Because Pomalaa waters are still declared as uncleared waters, it is advisable that vessels calling for the first time at Pomalaa, use a Pilot.

Pilot can be ordered from Ujung Pandang via Nikel Ujung Pandang not less than 72 hours before vessel's arrival at Pilot station.

There are 2 Pilot stations: (1) For Pomalaa loading point and berth, 04° 04′ 03″ S., 121° 28′ 00″ E. (2) For Tanjung Leppe loading point, 04° 15′ 00″ S., 121° 29′ 00″ E.

If vessel wishes to be piloted to the loading/unloading point on arrival day, vessel has to arrive at Pilot station before 1200 hrs. local time for Pomalaa loading point and berth and before 1400 hrs. local time for Tanjung Leppe loading point.
RESTRICTIONS: *Arriving/Departing hours:* Arrival: from 0600 – 1800 hrs. local time. Departure: 1. Pomalaa loading point and berth: from 0600 – 1600 hrs. local time. 2. Tanjung Leppe loading point: from 0600 – 1800 hrs. local time.

Mooring: The undermentioned vessels can be moored alongside beerth: General cargo vessels of max. LOA 135 m. and tankers of max. LOA 110 m.

Depths: Bar channel 11.00 m. (LWS); Alongside berth, North Pier, 5.00 m. (LWS); South Pier, 7.00 m. (LWS). At Pomalaa anchorage or loading point: for vessels of 15,000 d.w.t. and over – 13.00 m. (LWS); for vessels up to 15,000 d.w.t. – 11.00 m. (LWS). At Tanjung Leppe anchorage or loading point – 24.00 m. (LWS).
MAX. SIZE: *General Cargoes:* At North Pier: LOA not to exceed 135 m. and fully loaded draft not more than 5.00 m. At South Pier: LOA not to exceed 135 m. and fully loaded draft not more than 7.00 m.

Tankers: LOA not to exceed 110 m. and fully loaded draft not more than 7.00 m.

Ore Carriers: Fully loaded draft not to exceed 11.00 m. Vessels without cranes or derricks are not acceptable. Minimum capacity of cranes or derricks must be 5 tons.

General Cargo at Anchorage: Fully loaded draft not to exceed 11.00 m.
RADIO: Cables to Nikel Ujungpandang can be sent through Ujungpandang (Macassar) Coastal Radio Station, call sign PKF.

Arrival Notice: Information required.

Owner's advice: Owner to advise by cable to Aneka Tambang

Jakarta and Nikel Ujungpandang at least 8 working days before vessel's arrival at loading port.

Master's advice: At least 48 hours (or 72 hours if Pilot's assistance required) before vessel's arrival at Pomalaa waters, Master shall give the following informations to Aneka Tambang Jakarta and Nikel Ujungpandang. Last port of call, draft on arrival, estimated draft on departure, quantity of nickel ore or ferro-nickel ingots to be loaded, stowage plan (hatch division for the respective cargo), quantity and kind of commodity(ies) to be discharged and other necessary messages. Final amended arrival time must be sent at the latest 24 hours before arrival. Previous experience showed that one cannot rely on telegrams regarding ETA sent by Agents at last port of call in due time, therefore Nikeel Ujungpandang waits for the Master's telegram in order to make necessary preparation.

Shipper/Agent's advice: Shipper/Agents shall cable the Master 3 working days before vessel's arrival indicating the loading/unloading position prepared and other necessary messages.

Priority: Ore carriers. First come first served. Other vessels: Priority to be given to tankers.

Ship's radio transmitter is not to be used while lying in port.

TUGS: Available.

BERTHING: The wharf consists of a concrete quay extending 70 m. seaward and 18 m. breadth.

Loading/Unloading facilities for general cargoes:

Shore facilities: A number of mobile cranes with capacities of 5, 20 and 40 tons are available, also forklifts.

Lighters: A number of lighters of 70 d.w.t. up to 120 d.w.t. are available.

Loading/Unloading capacity: About 12 tons per gang per working hour, depending on the type of vessel, available cargo spaces, vessel's cargo gear, kind of cargoes, size of hatches, etc.

Unloading facilities for tankers:

Pipe-lines: 1 line of 10 in.×1,600 m. for M.F.O.
1 line of 8 in.×1,600 m. for I.D.O.

Pumps: 3 booster pumps with capacity of 150 cu.m./h. each.

Hoses: 4 pieces flexible hoses of 10 in.×9.40 m. with ASA 150 flanges connections.

Unloading capacity: maximum 200 t.p.h. by ship or shore pumps.

Tank farm capacity: 2×5,000 KL for M.F.O.
1×1,500 KL for I.D.O.

Tank cleaning: Tank cleaning operation is not allowed in Pomalaa waters.

Lay-time: Lay time shall commence 6 hours after N.O.R. tendered.

Loading facilities for ore carriers:

General: Loading of nickel ore at Pomalaa and Tanjung Leppe loading point is done by means of barges.

Number of gangs: Usually 4 gangs are used by vessels equipped with cranes or derricks. If necessary stevedores can provide 6 gangs.

Loading capacity: About 2,000 tons/24 hours per vessel, depending on the type of vessel, vessel's cargo gear, weather conditions, etc.

Unloading: Cargo for Aneka Tambang only.

Vessels without cranes or derricks are not acceptable.

Labourers will be supplied by shipper. Making the vessel ready for loading/unloading to be done by vessel's crew members.

STEVEDORES: Stevedoring is performed by P.T. Aneka Tambang's personnel. Loading/unloading equipment to be furnished by the vessel.

Working Hours: Loading to be effected on weather working days of 24 consecutive hours Sunday and Holidays included (WWD SHINC), but the following National Holidays are excepted:

New Year (January 1st); Independence Day (August 17th); Christmas Day (December 25th). Idul Adha, Maulid Day, Easter, and Lebaran determined by Moslem calendar and differ from year to year by international calendar. For definite dates consult Port Administrator.

Despatch/demurrage money to be paid in accordance with the related contract.

Loading/unloading to be effected with customary quick despatch (C.Q.D.) on good weather working days whereby Sundays, holidays, governmental local holidays and Saturdays between noon and midnight and Mondays between 0000 hrs. and 0800 hrs. are always excepted.

At Shipmaster's request, work on these excepted days can be arranged. The principals will pay the overtime charge on these excepted days.

MEDICAL: Doctor, hospital and inoculation services available.

FRESH WATER: Can be supplied alongside and at anchorage by 40-ton water barge.

FUEL: Not available.

TIME: GMT plus 8 hours.

CONSULS: None.

CUSTOMS: Vessel's bonded store will be sealed by Customs Officer on arrival and will remain sealed until the vessel leaves port.

Note: It is recommended that ship's Master consult the Agents about the local prevailing Customs Regulations with regard to currency, cigarettes, spirits, narcotics, etc. to prevent unnecessary difficulties and eventually fines.

REPATRIATION: Can be arranged. Repatriant is to be guarded by Immigration Officer from Pomalaa to Jakarta via Ujung Pandang until his departure from Jakarta to the destined country.

AIRPORT: There is a daily flight between Ujung Pandang and Pomalaa, served by Merpati Nusantara Airlines (MNA) using Twin Otter Planes. Flying time about 60 minutes.

GENERAL:

Cash advances: Cash advance at Master's request can be supplied by Agents in a reasonable amount.

Fumigation: No facilities.

Survey on/off hire: Can be arranged.

Ship's Chandler: None. In emergency cases, for a limited quantity Agents can act as ship's chandler.

Chart: Indonesian Sea Chart No. 152.

Nature of bottom: Sand and soft materials.

M.P.S. Tax: So called M.P.S. Tax (freight tax) has to be paid in advance to the Indonesian Tax Office at Jakarta, through the general Agents, Jakarta at the same time as the remittance of advance payment as stipulated below.

The amount of M.P.S. Tax (about 2% of the concerned freight earned) will be advised by the General Agents, Jakarta to the principals, if possible a few days before principal remits advance payment for disbursements. The final calculation of the M.P.S. Tax will be made later.

Disbursements: Advance payment for ore carriers: At least 14 days before vessel's arrival at Pomalaa, vessel's principal have to remit US$3,000 to the account of PT Aneka Tambang Jakarta as General Agents, at Bank Dagang Negara Gambir Branch Jakarta (Telex: BDN GB JKT.44432 Jakarta), as advance payment of the related ship's disbursement, and inform PT Aneka Tambang Jakarta and Nikel Ujungpandang about the remittance accordingly.

Advance payment for general cargo: A reasonable amount to be remitted to the same address and following same procedure as above.

Vessel's Disbursement Accounts: All vessel's expenses will be charged to the related principals through the vessel's Disbursement Account Statements.

SHORE LEAVE:

Shore pass: Shore pass must be carried by crew whilst ashore.

Visitors: Vessel's crew members are not allowed to invite friends, hawkers from shore aboard the vessel.

Visiting Kolaka: Crew members are prohibited to leave Pomalaa for Kolaka, except Master and Officers, who must be guided by Agents. Local leave in Pomalaa concession is permitted.

Shore leave hours: From 0600 hrs. to 2300 hrs. local time.

SHIPMASTER'S REPORT: 1976.

Tandjong Lepee is only an anchorage port, being a convenient outlet for the shipping of Nickel Ore in bulk, the operation being based on Pomalaa, about 5 miles away, where the Mining Company plant etc. is situated.

Charts: B.A. Chart No. 3616 is quite inadequate for approaching either Pomalaa or TG. Lepee, Japanese Chart No. 903 is better, while Netherlands Chart No. 152 is the best.

Documents:

6 Crew Lists.
4 Vaccination Lists.
2 Customs Declaration of Crew Effects.
2 Bonded Stores Lists.
1 List of Favour Parcels (including a Nil declaration).

Last Port Clearance and Derat. Certificate to be produced together with usual Safety, Loadline Certificates, etc. Port Health Doctor brings Health Declaration Form on arrival. 'Q' Flag must be flown until pratique granted.

Pilotage: No Pilots available, a small tug meets the vessel in a position about 1.5 miles West of Tandjong Pakar, in approx. Lat. 4° 14.5′ S., Long. 121° 30′ E. The Agent and officials board from the tug (accommodation ladder only) and the tug then leads the vessel into the anchorage.

From the above rendezvous position, a course of 055° for 1.5 miles will lead between 2 beacons marking reefs N.W. of Tg. Pakar. Right ahead on this course will be sighted another beacon to the North of Tg. Pakar, when this beacon is about 9 cables off, course should be altered to 090°, and about 8 cables from here should then bring the vessel to the anchorage position, half-way between 2 beacons approximately 6 cables apart.

Beacons are only thin posts about 4 m. high with small top marks similar in appearance to half of a 200 litre oil drum painted white, they are quite difficult to pick up under the best of conditions. Would not recommend making an approach at early morning if sun is shining, once the sun is well up the reefs themselves show fairly well, especially at LW. There are no navigational lights in this area, beacons do show up on radar at short range, but due to the possibility of local fishing boats being present, too much reliance should not be placed on radar detection of beacons for night navigation.

At Master's request, each can, can be prepared with light for departure at night time.

Radio: Macasser Radio (Ujung Pandang). The Mining Company have telex link with Jakarta. No VHF communication here.

Tugs: One tug of 800 h.p., 2 tugs of 175 h.p. mainly used for towing barges, and 1 ferry for crew service.

Medical: There is a hospital at Pomalaa, which is reputed to be well equipped.

Stevedoring: Mining Company supply competent crane drivers to operate ships' cranes and grabs, to load Nickel ore in bulk from barges. There are 12×80 ton barges, 2×120 ton, 1×200 ton flat top barge and 1×300 ton coaster available, this 'fleet' is divided according to requirements between a vessel working at Pomalaa and one working at Tandjong Lepee. At Tg. Lepee there is a barge loading conveyor capable of handling 4,500 tonnes per 24 hours. A similar loader exists at Pomalaa, and if there is no ship at Pomalaa, this is also used to feed cargo to Tandjong Lepee.

Stowage Factor of the Ore is declared as 0.7 cu.m./tonne (approx. 25 cu.ft./ton) but during a dry spell stowed at about 30 cu.ft./ton with an angle of repose over 45° and became very compacted, even reluctant to fall out of a wide open grab. The ore has mainly the appearance of coarse soil with a few stones and small rocks mixed in.

Fresh Water: Can be supplied by barge in 40 ton tanks, but ship must provide pumping facility.

Communications: One flight daily, served by Merpati Nusantara Airline between Pomalaa and Macasser. Repatriation can be arranged in emergency.

Shore Leave: Permitted, official shore passes provided, which must be returned prior to departure.

SHIPMASTER'S REPORT: December 1978.

ETA's: Our first ETA and request for a Pilot was sent on leaving Singapore, as per charterers' instructions. Macassar Radio, which is recommended by the Nickel Company, could not be raised by the Radio Officer, so our first ETA was sent via Jakarta Radio. This telegram never reached the shippers, so I would strongly advise against using Jakarta Radio in the future.

Our second ETA was sent via Macassar Radio 48 hours prior to our arrival off Pomalaa. This cable took some 30 hours to reach the shippers and by the time they acknowledged it, vessel was only 12 hours from Pomalaa. Since the first cable had still not reached them, the shippers had not arranged a Pilot but asked if I was prepared to be led into Pomalaa by a tug from the Nickel Company. They were doubtful, they said, whether they could arrange for a Pilot to be flown across from Macassar for the morning of our arrival.

Since our third ETA had already been sent off 12 hours previously I replied to this cable that I requested the Nickel Company to do their best to arrange a Pilot as the vessel had never visited the port previously and had only a poor photostat copy of the chart of the area. Nothing more was heard from the Shippers before our arrival off Pomalaa, so we arrived not knowing whether there would be a Pilot waiting for us.

Pilotage: There is no British Admiralty Chart of Pomalaa and Approaches, the best chart available being Indonesian Sea Chart No. 152. We were supplied with a very poor photostat copy of this chart by the charterers' Agents in Singapore which did not show very clearly the extent of the reefs in the approaches to Pomalaa. Both ports are surrounded by numerous reefs and arrival or departure during hours of darkness is not to be recommended, particularly in view of the fact that there are no lights at all marking these reefs and radar cannot be relied on too heavily to locate the beacons marking them. Similarly, arrival or departure in rough seas is not to be advised. Vessel arrived off Pomalaa at around 2200 hrs. and with the sea conditions being flat calm at the time, we drifted about 12 miles off the entrance until daybreak. The pilot station for Pomalaa is in position Lat. 04° 04′ 03″ S. Long. 121° 28′ E. which, as will be seen from the plans in the 1977–78 edition of the "Guide" is well inside the islands. Admiralty Sailing Directions were closely followed when proceeding in to the pilot station and no problems were encountered. The echo sounder was run constantly during this period and recorded depths tallied closely with those charted. The passage recommended in the sailing directions keeps the vessel in deep water at all times. Tidal streams in the approaches appear to be very weak.

The vessel was met outside the islands by a tug from the Nickel Company which provided us with an original copy of Indonesian Chart No. 152 and a plan of the anchorage area. The tug's crew did not know whether a Pilot would be coming out to us or not, but offered to lead the way into the port. We proceeded at slow speed, with a deck officer standing-by forward throughout, in towards the pilot station, arriving there at around 0900 hrs. After only a few minutes of following the tug I decided to follow the Admiralty Sailing Directions and the chart which I had just received, as the tug had a habit of forgetting that we were very much deeper drafted than himself, and kept cutting corners when passing the shoals and reefs.

Seeing no sign of the pilot boat in the channel and with weather conditions being so ideal, I decided to proceed very slowly up channel to the designated anchorage of which I now had a plan. No problems were encountered and plenty of water was found in the centre of the channel. Had I decided against proceeding without a Pilot I would have had to take the vessel out to sea again and drift off, as anchorage in the vicinity of the pilot station is out of the question owing to the depth of water and the unevenness of the sea bottom. The reefs are nearly all marked by stick beacons with white cans on top and under certain weather conditions could easily be missed. Conditions at the time of our arrival, however, were ideal and no difficulty was encountered in spotting the various beacons as we proceeded up channel.

The Pilot eventually arrived at 1045 hrs., too late to be of any assistance to me, as by that time we were approaching the anchorage area. Vessel eventually came to anchor in the designated area shown on the chart. She lay quietly to 3 shackles in 12 m. of water for the 3 days of our stay in Pomalaa. The holding ground is good there and the anchorage is somewhat sheltered.

The passage from Pomalaa round to Tanjung Leppe was made again without a Pilot, owing to the difficulty in obtaining a Pilot without plenty of prior notice. The draft leaving Pomalaa is restricted to about 10 m. owing to the fact that there are several 11 m. patches in the anchorage area. Anchor was weighed at daybreak and the same route was used to leave as was to enter. As will be seen on the plan in the "Guide" there are other channels marked leading down to Leppe, but I personally would not recommend them. The safest route by far is to go out around the outside of Padmarang again and approach Tanjung Leppe in deep water from the West. The anchorage at Leppe is much more restricted than that at Pomalaa and is far more exposed to Westerly winds. Holding ground is again good but several anxious hours were spent on the bridge during the 5 nights we were anchored at Leppe when rain squalls from the West passed over the ship. There is about 25 m. of water at the Leppe anchorage, so there is no draft restriction on leaving, but with the anchorage being so exposed to the West there is quite a heavy sea running at times.

I would recommend that any vessel calling at these ports in the future do their best to obtain Indonesian Chart 152 in advance. I was able to purchase the copy which they provided me with from the Nickel Company.

Loading: Loading of the nickel ore is from barges at both ports. There is a total of 14 barges available for use between the 2 ports, but during vessel's stay there was a Japanese ship also loading nickel ore, so the barges had to be shared between the 2 ships. Thus, at no time were there ever more than 7 barges available for our vessel's use. The barges range in capacity from about 80 tonnes to 200 tonnes, with most of them around the 100 tonnes mark. The barges at both ports are loaded by a small conveyor. It is capable of pouring at a max. rate of 150 tonnes per hour. Thus, once cargo has been started, the max. loading rate is around 3,600 tonnes per day. Since vessel is capable of loading at a much faster rate than this, long delays were experienced waiting for barges to be filled ashore.

Loading Master lives aboard throughout the loading, together with his assistant. The Loading Master and his assistant have walkie-talkie VHF sets for communication with the shore. The figures given to us by the Loading Master each day for cargo loaded did not tally with the figures obtained by the chief officer from draft surveys. The stevedores' figures are based purely on the number of barges loaded and since they have no real idea of what each barge holds are largely guess work. Draft surveys were conducted by the chief officer on arrival and departure and it is his figure which decides the Bill of Lading quantity. Basically the ship is just loaded until the chief officer says she's full and everybody seems agreeable to accept the figure he gives them. To obtain an accurate figure as to what has been loaded in each hatch is thus virtually impossible. Stowage factor of the nickel ore was found to be around 33 cu.ft. per tonne and not 28 cu.ft. per tonne as claimed by the stevedores. This may of course be attributable to the fact that there had been little rain in Pomalaa for several weeks prior to vessel's arrival.

Tyre fenders were employed by the ship to prevent the barges from scraping against the ship's side, but the stevedores do provide some floating wooden fenders for this purpose. Despite these precautions a certain amount of chafing did occur, and on one occasion a barge landed heavily against the ship's side causing an indentation in the shell plating. The stevedores are reluctant to accept responsibility for damage caused but on this occasion were persuaded to sign a letter acknowledging liability. Most of the stevedore damage was repaired to our satisfaction prior to departure.

The crane drivers provided by the stevedores are quite competent and few worries were experienced by the ship in this respect. Cargo is worked 24 hours a day although little cargo is actually loaded during the night, only 1 crane normally being employed during hours of darkness. The stevedores were found to be generally co-operative, especially with regards to trimming the cargo out into the wings.

Medical: There is a hospital with limited facilities in Pomalaa, which is operated by the Nickel Company. It provides adequate medical attention. Crew inoculation can be arranged and the Doctor, who is also the Port Health Officer, is licensed to issue Derat Exemption Certificates, as he did for our vessel.

Shore Leave: Shore passes are issued by the immigration authorities to each member of the crew. Shore leave is permitted, although there is little to see in Pomalaa and Tanjung Leppe. A free boat service is offered by the Agents, but few members of the crew took advantage of this.

Seamen visiting Pomalaa after dark are advised not to venture into the native village, for fear of being attacked and robbed, a not uncommon occurrence in the port. Crew may, however, visit any of the establishments within the Nickel Company's compound where limited recreational facilities are available.

Communications: There is no communication by Marine VHF in the Port of Pomalaa. Walkie Talkies are used by the stevedores for ship-to-shore communication, but it is not possible to call the Agents office on these sets. There is a telex link with Jakarta only, so all outgoing telexes are subject to long delays. Use of the ship's radio equipment is expressly forbidden at both anchorages.

Agency: Difficulties were experienced due to language problems. Very little English spoken.

AGENCY:

General Agent for Ore Carriers: PT Aneka Tambang (head office). Jalan Bungur Besar 24–26, PO Box 2513, Jakarta, Indonesia. Cable address: Anekatambang Jakarta; Telex Antam JKT 46323; Telephone: 360011 – 360019 – 360027 – 360035.

General Agent for Non-Ore Carriers: To be nominated by principals.

Sub-Agents: PT Aneka Tambang, Unit Pertambangan Nikel, Pomalaa. Jalan Dr. Sam Ratulangi 60, Ujung Pandang, Indonesia. Cable address: Nikel Ujungpandang. Telephone 22237 – 22234.

PULAU SAMBU: 01.09 N. 103.54 E.

DOCUMENTS: Upon arrival ships have to fill in the following forms:
Harbour Report (obtainable from the boarding Pilot).
Pilot Certificate.
Also required from the Masters are:
6 copies of Crew List.
1 copy Stores List.
1 copy Personal Effects List.

PILOTAGE: Pilots are in Government Service. Pilot signals according the International Code of Signals. Pilots can be ordered direct by cable to the Harbour Master or via the ship's Agent. Pilot boards in position 1° 10′ 38″ N., 103° 52′ 12″ E.

RADIO: Vessels calling at Pulau Sambu for bunkers should communicate with PKC 2 Pladju Radio or Tunasix Singapore, or direct with Sambu Radio PKJ 51 (A3 Radio Telephone) and VHF Channel 19.

HEALTH: Vessels arriving from abroad have to fly the "Q" Flag (yellow flag) until boarded and released by the Quarantine Officer. Masters have to fill in the Quarantine Form and signed by him and the ship's surgeon, if any, and produce the following:
Health Book or Bill of Health.
Deratisation (Exemption) Certificate.
Valid International Vaccination Certificates of Crew members and Passengers.
Crew and Passenger's Lists showing the validity dates of above Certificates.

During the time that the "Q" Flag is flying no one is allowed to board or leave the vessel except with the permission of the boarding Quarantine Officer.

TUGS: Available.

BERTHING: Pulau Sambu has an excellent location 8 miles South of Singapore and approximately 3 miles from the International waterway. It has 2 deep water jetties with a max. depth of 36 ft., a max. length of 440 ft., and the length of the navigable channel is 1,500 ft.

FUEL: Ideally, it is necessary to advise suppliers of bunkers required at least 15 days before the ETA of the vessel. The authorities at Pulau Sambu also require the vessel to contact them 24 hours prior to their ETA.

Bunkers available: Fuel Oil, 1000 seconds, and MDO.

CUSTOMS: Masters have to declare all local currency on board. It is strictly prohibited to take local currency ashore. No limitation for foreign currency.

Master should consult the Agent about prevailing Customs regulations with regard to currency, cigarettes, spirits, etc., to prevent unnecessary difficulties and fines.

AUTHORITY: Department of Sea Communications.

SABANG: 05.50 N. 95.20 E. (See Plan Book)

DOCUMENTS: Upon arrival vessels have to produce the following Certificates and Documents, which will remain in the Harbour Master's custody until cleared:
Nationality (Registry) Certificate.
Seaworthiness Certificate.
Measurement (Tonnage) Certificate.
Deratisation (Exemption) Certificate.
International Load Line Certificate.
Safety Equipment Certificate (cargo ships).
Safety Radio and Radiotelephony Certificate (cargo ships).
Health Book or Bill of Health and vaccination certificates.
Last Port Clearance.
Subscription of Light and Harbour Dues and wharfage if any.
Crew Lists and Passenger's Lists with vaccination dates.
Ship's Articles.
Stores List.

Passport or seaman's card remain in Immigration office until cleared and the crew to use shore pass to go on shore, issued by the Immigration.

PILOTAGE: *Approach:*
Vessel should steer on the light of Klah Island and keep at least 1 mile offshore, especially of Ujung Masam owing to an inward drift, until the bay is well open. When entering the bay, the light-buoy South of Ujung Lho Me should be kept on port side.

The Signal Station at Peunimpun reports day and night the arrival of ships, by night an unofficial white light, showing all around is shown, visible at a distance of 12 miles.

Signals by day with flags according the International Code of Signals and by night by signal lamp.

HEALTH: Vessels arriving from abroad direct have to apply well in advance to the Department of Health (Quarantine Section) for a provisional free pratique, as said pratique has to be cabled to the Port. The provisional free pratique is only valid for this Port, the next port of call must be a First Class Port as no further provisional free pratique will be issued, unless the vessel sails directly abroad.

RADIO: Sabang Radio. Call sign: PKA. Frequency: 500 kc/s./438 kc/s. Time: 0100–0200, 0400–0500, 0900–1000 GMT. 8473 kc/s./8686 kc/s. Time: 0200–0230, 1000–1030 GMT. 17184.5 kc/s. Time: 0230–0300, 1030–1100 GMT. VHF – Available. Power – 1 KW.

TUGS: A small tug available for mooring assistance, subject advance notice.

BERTHING: The usual anchorage in the inner roads is the North side of the bay, vessels can approach shore until in 32 and 29 m. depth. There is good holding ground. During S.W. or S.S.W. squalls in the West monsoon vessels have to be kept free from the quays by means of the mooring buoys moored off the berths.

Western coal wharf, usable berth length 140 m. with depths alongside of 7 m. at LWS.

Eastern coal wharf: usable berth length 150 m. depths 6.8 m. at LWS.

Commercial wharf, usable berth length 150 m. depths 8.0 m. at LWS (length: 220).

At the head of the oil jetty there is a depth of 10 m. at LWS.

FRESH WATER: Available, rate 30 t.p.h. with one hose. Usual to use 3 hoses. Water can be pumped faster if additional water pump used.

FUEL: Available from Pertamina, Jakarta if permit obtained.

REPAIRS: Minor repairs can be carried out at the West end of the Coal Wharf at the repair shop and electrical power station.

CUSTOMS: It is recommended that Masters consult the Agents about the local prevailing Customs Regulations, with regard to currency, cigarettes, spirits, etc., to prevent unnecessary difficulties and eventually fines.

AIRPORT: Five domestic flights a week, 15 minutes drive from the Harbour.

AUTHORITY: Department of Sea Communication.

SALAWATI: 01.21 S. 130.59 E. (See Plan Book)

OPERATORS: Pertamina – Phillips Petroleum Co. Indonesia.

LOCATION: Phillips Salawati Marine Terminal is located in the Sele Straits between the Island of Salawati and mainland Irian Jaya, Indonesia

Salawati Marine Terminal Office is located on board the storage barge "Wampum" adjacent to the export tanker mooring.

Mooring system is positioned in Latitude 1° 21′ 18″ S. and Longitude 130° 58′ 39″ E. The minimum water depth in the area of the mooring system is 51 ft.

FLAGS: In accordance with practice in Indonesian Ports, Quarantine, Immigration, Pilot and call sign flags must be displayed by all vessels approaching the anchorage. These signals shall be displayed continuously until clearance is granted. The signals are as follows:

Sunrise to sunset:	Quarantine Flag "Q"
Sunset to sunrise:	Signal Lights (red over white)

The "N" flag should be flown until the Immigration Officer boards the ship. The "G" flag (request for Pilot) should be flown until the Mooring Master boards. The vessel should also fly its call sign. As soon as the Mooring Master boards, the "G" flag should be replaced by the "H" flag which signifies that the Pilot is aboard. The tanker may fly the "P" flag if it is going to sail within 24 hours.

DOCUMENTS: Indonesian Immigration, Customs and Harbour Master officials will board the vessel after it is all secured to grant clearance.

After the tanker is all secured, the Customs Officer will board the tanker to seal the stores. If arriving from a foreign port, the Agent will prepare the General Cargo Declaration form stating the cargo on board the tanker and attaching appropriate shipping documents. If the tanker is arriving from an Indonesian port, the 5-B form issued at the last Indonesian port will be retained by Customs and the arrival clearance at Salawati is granted.

The Harbour Master submits a Harbour Report Form for the Master to complete. The Agent prepares the ship's documents check list form to check the validity of each document. These documents are: Certificate of Registry, Ship's Construction Certificate, Load Line Certificate, Safety Equipment Certificate, Safety Radio/Telephone/Telegraph Certificate, Cargo Gear Certificate and Deratting/Exemption Certificate. This list is then delivered to the Harbour Master with the following documents attached: Last Port Clearance, Crew List approved by the Immigration Officer and Light Dues Receipt if arriving from another Indonesian port. The Harbour Master issues a port clearance on departure provided clearance is also granted by the other governmental authorities (A Panamanian port clearance for Panamanian flag vessels is not required at Salawati).

The Immigration Officer requires 2 copies of the Crew List and will check the Ship's Articles and the passports of the crew. When these documents are found to be in order, an arrival clearance will be marked on the crew list.

If arriving from another Indonesian port the Agent will sign a guarantee if the vessel cannot prove that light dues have been paid.

Prior to the vessel's departure the Immigration Official requires 2 copies of the Crew List to be marked for departure immigration clearance. The Master is given a signed copy by the Immigration official of the Crew List for departure.

Crude oil loading documents such as Bills of Lading, Quality Certificate, Quantity Certificate, Dry Certificate/Ullage Report, Time

Loading Report, Certificate of Origin, Cargo Manifest and Master' Receipt for Documents/Samples are prepared at Salawati Marin Terminal. When the tanker has been loaded, the documents sha be completed and final clearance formalities will be carried ou aboard the vessel, either at the mooring or in the anchorage area as circumstances dictate.

Customs will issue the 5–B form which is for departure clearanc of the vessel.

The Master should be prepared to issue 6 copies of the Crew Lis which will be distributed as follows:

	Immigration	*Harbour Master*	*Total*
On Arrival	2	1	3
On Departure	2	1	3
			6

Before leaving the terminal area, the Master should advise the terminal the Vessel's ETA at destination.

PILOTAGE: The Salawati Terminal Pilot will board the vessel in the anchorage area for passage to the Salawati Terminal. The channe is marked with numerous Navigational Aids to permit safe passage through the Sele Strait. Vessels arriving in the anchorage area afte 1400 hrs. local time (GMT + 9 hours) will be berthed at the termina at Pilot's discretion.

Ships are requested to have a pilot ladder safely and securely rigged and ready for immediate use, and long enough to reach the mooring launch. A combination of pilot ladder and ship's accommodation ladder, so arranged that personnel can first use pilot ladder until part way up the vessel's side, and then transfer to the accommodation ladder is recommended, especially on very large ships. A light line should be ready to take aboard the Mooring Master's equipment. There should be adequate lighting at night Vessels will provide a lee for the Mooring Master both when boarding and leaving.

ANCHORAGE: If requested to anchor, the recommended anchorage area is 4.5 miles West of Sorong in position Latitude 00 53′ 00″ S. and Longitude 131° 10′ 00″ E. Under no circumstance should the export tanker enter the restricted area around th structures without the Mooring Master aboard.

RESTRICTIONS: The approach channel has a minimum depth of 5 ft. A minimum under keel clearance of 7 ft. is required, restricting the maximum loaded draft of an export tanker to 50 ft.

Strength of Tide: Up to 4.5 knots.

MAX. SIZE: Salawati Marine Terminal can accept vessels up to 60,000 d.w.t. Under certain weather conditions, vessels up to 100,000 d.w.t., light loaded to the equivalent of a 60,000 d.w. vessel may be accepted. Such acceptance is at the discretion of th Area Superintendent or his designated alternate.

The ship's Master must not permit his vessel to be loaded to a depth of more than 43 ft. deepest draft due to the restrictions o water depth in Sele Strait unless permitted to do so by The Company Area Superintendent or his designated alternate.

HEALTH: Each tanker entering the port of Salawati must have requested and been granted entry permit/agency permit prior to its arrival. At the same time application is made for provisional pratique through the Directorate of Quarantine and, if granted, a cable advice is sent to the harbour authorities. Port Health Clearance is issued prior to the tanker's arrival and is also valid for departure clearance. If provisional pratique is not granted a Port Health Officer will be provided. All of the foregoing is arranged through and by the Agent.

Each crew member should be in possession of an International Vaccination Card.

RADIO: It is most important that incoming tankers contact Salawati Marine Terminal 72 hours before the estimated time of arrival. Further cables should be sent to the terminal 48 hours and 24 hours in advance of arrival, or when ETA changes by more than 3 hours. Communications with Salawati Marine Terminal can be established using one of the following links.

(1) *Sorong Coastal Radio Station*

Name of Station : Sorong Radio
Call Sign : PKY–4

Frequency kHz	*Nature*	*Hours GMT*
6518.6	SSB	H24
4361.6	SSB	H24
8755	AM	H24
8730	AM	H24

Master should request Sorong Coastal Radio Station to relay the necessary information to Salawati Marine Terminal.

(2) Name of Station: Pertamina Sorong Radio
Call Sign: PKY–41

Frequency kHz	*Class*	*Hours GMT*	*Keepwatch*
6456	A1	0000–0020 0200–0220 0300–0320 0400–0420	6mc
6515	A3J	0120–0200 0220–0300 0420–0500	6204/6200
4434	A3J	0120–0200 0320–0400	4136
VHF Ch. 16, 9, 19		2300–0500	Ch. 16

Note:	Working Hours	GMT
	Monday–Thursday	2300–0500
	Friday	2300–0300
	Saturday	2300–0400

Master should request Pertamina Sorong Radio Station to relay the necesssary information to Salawati Marine Terminal.

(3) *Pertamina Coastal Radio Station*

Name of Station: Jakarta Radio
Call Sign: PKI–2

Frequency kHz	*Class*	*Hours GMT*	*Keepwatch kHz*
452	A1	H24	500
8626	A1	0200–0300, 0400–0500, 0700–0800, 1030–1200, 1400–1500, 1800–2000, 2200–2300	8354–8374
12980	A1	0000–0200, 0300–0400, 0500–0700, 0800–1030, 1200–1400, 1500–1800, 2000–2200, 2300–2400	12534–12561
VHF Ch. 9/19	FM	0000–1500	Ch. 16

According to information from the Department of Sea Communication, starting on January 1978 Jakarta Radio will change working frequencies and time schedules as follows:

Frequency kHz	*Class*	*Hours GMT*
4361.6	A3	0500–0700, 0900–1100, 1400–1500, 1800–2000,
4434.9	A3	0000–0200, 1200–1400, 1600–1800, 2200–2400,
6515.4	A3	0300–0500, 0800–0900, 1500–1600, 2000–2200
6518.6	A3	0200–0300, 0700–0800, 1100–1200

Frequencies 452 kHz and VHF will not be changed.

Masters should request Jakarta Radio Station to relay the necessary information to Phillips office in Jakarta at phone nos: 341793, 342569, 346351 or by telex to Philpetco Jakarta Telex No. 46798 Filpet Ia.

Details of Arrival Cable:

The following information should be included in the cable sent to Salawati Marine Terminal 72 hours in advance of arrival.

1. Name of vessel and radio call sign.
2. ETA in GMT and date (Local time is GMT + 9 hours).
3. Cargo requirements.
4. Deballast time.
5. Maximum loading rate.
6. Arrival draft.
7. If there is any sickness aboard give whatever information is available as to the possible type of sickness, or confirm that vessel has clean bill of health.
8. Last Port of call.
9. Any hull, bulkhead, valve or pipe-line leaks on vessel which could effect loading or cause pollution.
10. Flange dimension of vessel's manifold connection.

Procedure for Appointing Agent:

Owners should appoint "Pertaminaship" Jakarta, as General Agent by cable/telex which in turn will appoint Pertamina Unit V as handling Agent to attend the vessel at Salawati Marine Terminal. Pertaminaship should be notified two weeks prior to tanker's arrival.

General Agents:	Pertamina Directorate of Shipping & Communications 32/34 Jalan Jos Sudarso P.O. Box 327, Tanjung Priok, Jakarta, Indonesia.
Cable Address:	Pertaminaship Jakarta
Telex No.:	DKT 42885 Answerback Pertamina.
Telephone:	690312 (11 lines) Ext, 225, 315, 335 & 350 (Tanker Agency & Operation)

Entry Permit or Agency Permit:

Each tanker entering Salawati Marine Terminal must have requested and been granted entry permit prior to its arrival. It is vital that the General Agent receives the following information two weeks before vessel's arrival to obtain agency permit for foreign vessel from the Government/Directorate General of Sea Communication:

1. Name of owners/principals and full address.
2. Name of vessel.
3. d.w.t./Call Sign/Flag.
4. Name of Master/Number of Crew.
5. Last Port of Call.
6. ETA.
7. Destination after loading.
8. Indonesian Ports of Call.

The ship's Master is responsible to ensure that no communication by radio is allowed within the terminal area. Unauthorized radio communication will be cause for cessation of all operations, except clearing of the berth, and vessel's notice of readiness will be immediately nullified.

VHF: Vessels equipped with VHF radio telephone should contact terminal on International Mobile Service Channel 16/156.80 mc/s and then communicate on Channel 9 from 0000–2400 hrs. GMT. The other Channel used is Channel 19. The language of the terminal is English and Indonesian.

BERTHING: The Company Area Superintendent, or his designated alternate, shall be the sole authority to decide when the port is closed due to unsuitable weather conditions preventing normal working operations.

Various combinations of wind, sea, and tidal conditions, also the size, length, ballasted trim, and handling qualities of a vessel can affect the decision to berth a vessel at Salawati Marine Terminal. All of these factors have to be evaluated before a final berthing decision is made.

After a vessel has been berthed and pratique has been granted, a terminal official will board to discuss loading arrangements. Before any crude is loaded all ship's scuppers on main decks must be plugged and cemented oil tight, Approved mechanical means of closing scuppers may be accepted. A deck inspection will be made by Salawati officials and if the vessel is suitable for loading crude oil a signed notation to this effect will be made on the Company Dry Certificate.

It is the responsibility of the vessel to ensure that all mooring lines are properly tended. Salawati personnel will constantly check the vessel's mooring and at any time may direct the lines to be heaved tighter or slackened off under the supervision of a responsible ship's officer, as circumstances warrant.

During the vessel's stay at the mooring emergency towing wires shall at all times be hung over the ship's bow and stern. These wires shall be secured to the bollards inboard to enable the vessel to be towed away should the need arise. They must be tended throughout to keep the eye of the wire not more than 2 ft. above the water.

The Mooring Master will report unsatisfactory conditions to the Company Area Superintendent or his designated alternate, who may, in turn, reject the ship until corrections are fully made. All costs accruing therefrom will be for the ship's account.

A ship may be rejected, if, upon inspection, it is not properly equipped, or if it is not suitably manned, or if it has dirty ballast or tanks unsuitable for the cargo as determined by the Company Area Superintendent or his designated alternate.

A vessel is suitably manned if it has a full complement of qualified officers and a crew all of whom are in sober condition, competent and willing to carry out their duties and orders.

A ship must be equipped with a good working propulsion unit as passed by the appropriate survey society. Inoperative ships, or partially inoperative ships will be rejected. Should it become inoperative while at the moorings it will be removed at the vessel's expense.

No repairs are to be made while mooring or unmooring, or at the moorings without the express permission of the Company Area Superintendant or his designated alternate.

A vessel must have both bower anchors in good working condition and in such sizes and amounts as to meet either "Lloyd's or A.B.S." standards although they may be, in fact, classified by other societies. It is strongly recommended that anchors have proper anchor buoys attached to each anchor.

All vessels must carry adequate, synthetic lines used for mooring purposes. No wire ropes should be used for mooring export tankers at this terminal. Each mooring rope must not be less than 100 fathoms in length.

To assist in vessel's turn around, tankers should have all necessary booms and cargo gear rigged and ready before the ship is boarded by the Mooring Master.

BALLAST: No facilities are available for disposal of dirty ballast.

Owners and Masters are required to observe International Convention laws and Indonesian Government regulations concerning pollution of the sea, having particular regard for this area of the Sele Strait.

It is the responsibility of the ship's Master to see that no oil of any kind is pumped or spilled overboard from his ship. Drip pans, saw dust, dispersant etc., should be used at all times especially when disconnecting hoses, in order to avoid any spillage overboard.

The categories of pollution include oily water from bilges, crude residual from previous voyages, or any other matter that may result in pollution of the sea.

Any fines imposed by governmental authority for pollution shall be for the vessel's account.

In the event that the Company has to settle any third party claims as a result of damages to property caused by pollution attributable in any way to the vessel, they will have the right to reimbursement by those responsible for the vessel for all expenses incurred.

In the event of oil spillage or pollution of the waters all labour and employment costs for cleaning operations will be to the vessel's account if caused by the vessel.

As soon as practical after arrival, all tankers will be inspected by a Salawati Marine Terminal Official for dirty ballast. During discharge of ballast similar inspections will continue.

If evidence of oil appears at any of these inspections, the ship will be rejected, and will not be accepted again until satisfactory evidence is produced that such ballast was disposed of in a proper manner. If during inspection, or during progress of loading, it is revealed that ship's tanks are not tight, or that oil is leaking from the ship, the ship may be rejected or refused further loading.

If the ship's tanks are found to be leaking, it will not be accepted for loading.

A tanker must have sufficient ballast for safe handling having due regard to existing weather and sea conditions and also for safe passage through the Sele Strait. Through a careful watch of the weather and sea conditions, frequent exchange of information between ship and terminal, and by a knowledge of the behaviour of his own ship, a ship's Master may come to the terminal with a minimum of ballast and thus lessen any possibility of infringement of sea pollution regulations.

In addition to the lights usually displayed, vessels at the moorings discharging ballast or loading cargo during darkness will brilliantly illuminate the sea around the ship, so that any pollution will be noticeable. The lighting will be of an approved and permanent nature.

Tankers equipped with a separate system of ballast tanks will be allowed to discharge ballast, and load oil simultaneously, providing approval is first obtained from the Company Area Superintendent or his designated alternate or independent inspector and provided the Pertamina representative agrees.

Most responsible ship Owners have adopted a system of tank cleaning using circulatory methods of transfer of tank washings with chemicals. The result is that no oil discharges into the sea and oil separated is collected in a sloptank. The terminal will load on top of such slops unless otherwise directed. This system is highly recommended to avoid pollution of the Sele Strait.

Masters are warned that inspection of ballast is strict.

Any tanker rejected because of dirty ballast or sea pollution will automatically nullify his notice of readiness and will lose any priority of position for loading.

LOADING: It is absolutely essential that extremely careful supervision be exercised by officers of vessels while loading operations are in progress. A responsible ship's officer is required to be on duty continuously at a point near to the tanks being loaded. He will be assisted by an adequate number of ship's personnel in these operations.

Raising, lowering, connecting, tending and disconnecting of oil loading hoses as well as other labours and duties on shipboard connected with loading of cargo or maintaining mooring lines in a correct manner will be performed by the ship's crew directed by a responsible officer as required by the Mooring Master. Loading of export tankers is through two loading hoses with 10 in. ASA 150 connections.

All ships using Salawati Marine Terminal must be able to connect their manifold to the 10 in. flanges. Masters are reminded it is the ship's responsibility to provide such reducers as may be required to make the connection and that the hose connecting operation will normally be carried out while the ship is de-ballasting.

Request for the terminal to stop the flow of oil cargo at a predetermined tonnage must be in writing. The request must include the statement by the ship's Master that the Company will not be held responsible for any error and that in case of the vessel being overloaded the excess cargo cannot be pumped back to the storage tanker. Ship's Master will also be held responsible for any oil spills caused by this request.

The export tanker must lift the export hoses from the water by means of its own derricks and using its own crew. The cargo derrick required to raise the loading hoses from the water must have minimum lifting capacity (SWL) 5 tons and have a sufficient length of strong lifting wire rope on the drum to enable the cargo hook to reach the water, and still have adequate turns of wire left on the drum to ensure safety.

An A.O. Smith metering system is used to load the export tanker.

Two loading hoses with 10 in. of ASA 150 camlock flange connections are used to load the export tanker. All vessels not having 10 in. connections must provide their own reducers.

A loading rate of approx. 25,000 bbls.p.h. can be accomplished.

Salawati crude oil of approx. 36–38° API at 60° F. is available from Salawati Marine Terminal.

If, at any time an overflow of crude oil occurs, loading will be suspended immediately, and not be resumed until the oil is cleaned up and removed from the decks of the vessels, and/or from the surface of the sea, and any damage is repaired and no further danger exists. It is stressed that during loading operations, the Salawati cargo supervisor will immediately slow down the loading rate on receipt of a request for same from the ship's deck officer in charge of loading.

All spillages of oil must be reported immediately to the Company Area Superintendent, or his designated alternate, and subsequently, a detailed report, in writing, submitted by the Master of the vessel concerned giving all relevant details.

CARGO DOCUMENTATION: Crude oil loading documents such as Bills of Lading, Quality Certificate, Quantity Certificate, Dry Certificate, Ullage Reports, Time Loading Report, Certificate of Origin, Cargo Manifest and Master's Receipt for Documents/Samples are prepared at Salawati Marine Terminal.

When the tanker has been loaded, the documents shall be completed and be taken aboard the tanker for the Master's signature. Signing of these documents by the Master will take place at the same time final departure clearance formalities are being carried out.

Notes of protest, if any, should be handed to the Company Area Superintendent or his designated alternative for further delivery to Phillips Petroleum Company Indonesia, Jakarta.

CUSTOMS ALLOWANCES: Cigarettes, cigars, tobacco, matches, spirits, wine, beer, perfume, arms, ammunition and possibly other items have to be locked up under customs seal from time of arrival of ship in port until time of leaving territorial waters. Each person is allowed to bring in 200 cigarettes or the equivalent in grams of tobacco or cigars. Special allowances are made for the Master under special circumstances. The Master should prepare two copies of the store list for Customs use.

FRESH WATER: Not available.

FUEL: Not available.

MEDICAL: No clinic available.

REPAIRS: No facilities.

CONSULS: None.

REPATRIATION: Not possible. If emergency conditions prevail, for humanitarian reasons, exceptions to the foregoing may be permitted. All expenses incurred will be for ship's account.

TIME: GMT plus 9 hours throughout the year.

SHORE LEAVE: Not possible.

DELAYS: Delays to vessels using Salawati Marine Terminal due to the port being closed because of bad weather conditions shall not be computed as used lay time when compiling vessel's turn around time.

GENERAL: *Advances:*
Owners are to pay advance funds for port charges amounting to US $4,000.00 to US $9,000.00 depending on d.w.t. before vessel arrivals. Settlement should be arranged by telegraphic transfer to "Pertamina Agency" account No. 135. 15.000.000005 with the Bank Negara Indonesia 1946, Cabang Gambir, 77A Kebon Sirih, Jakarta under advice to Pertaminaship.

Logs: Masters are advised to keep careful watch on the approaches for semi-submerged floating logs which may become hazardous to safe navigation.

Charts: Charts for the area are as follows:

1. Admiralty Chart No. 3744
2. Admiralty Chart No. 3745.
3. Admiralty Chart No. 1416.
4. Indonesian Hydrographic Charts No. 213, 217 & 219.

Winds: Winds can reach a maximum of 75 m.p.h. during local storms and all vessels must make sure they carry sufficient ballast to be manoeuvrable in the restricted waters of Sele Strait during these storms.

Stores: Not available.

Visitors: Only authorized personnel or visitors are permitted on the storage barge and/or export tanker.

Crude Oil Testing: The crude oil testing laboratory is equipped to perform the following tests:

API Gravity, BS & W and Pour Point. Any additional tests that may be required will be performed in Jakarta.

Flag: During daylight hours the Indonesian flag must be flown throughout the vessel's stay in port.

SHIPMASTERS REPORT: *August 1978.*

General: The oil loading terminal of Salawati is jointly owned by Phillips Petroleum Co., Agip and Conoco and is operated by Phillips Petroleum Company.

The loading terminal is located on the East coast of Salawati Island at Sele Strait. Salawati marks the Western part of New Guinea and belongs to Indonesia.

Reference: Refer to B.A. Charts 3744, 3745, 1416.

Coast Pilot 35, Eastern Archipelago Volume III.

Documents: Inward and outward clearance carried out at anchorage. Watches in excess of one, radios, cassette recorders, perfume etc., will be sealed by Customs. Seal will be inspected when receiving outward clearance. Papers required for clearance:

15 Crew Lists.
1 Crew Vaccination List.
1 Maritime Health Declaration.
3 Passenger Lists.
3 List of Narcotics.
3 Lists of Fire Arms & Ammunition.
3 Crew Custom Declarations.
3 Store Lists.

Ship's registry taken ashore and returned on outward clearance.

Pilotage: Government Pilot and Mooring Master – usually from Kasim Terminal (See "Sorong") board at anchorage. Mooring Master acts as Pilot. From the anchorage vessel proceeds through Sangoilin Mon (Heilige Straat) and Sele Strait towards Salawati. Heilige Straat is marked by unlit buoys and beacons, privately maintained by the oil companies. The min. depth is 57 ft., max. sailing draft from Salawati is 50 ft.

Anchorage: Recommended anchorage in position 00° 53′ S., 131° 10′ E. in approx. 40 m. of water.

Restrictions: Usually transit from anchorage towards Salawati is carried out during daylight hours only. In case of emergency, when storage barge is topped off, vessels will proceed to and from Salawati during darkness. In this case buoys will be temporarily lit by battery powered lights.

Vessels of 120,000 d.w.t. have been berthed at Salawati.

Health: Radio pratique not available.

Radio: Pertamina office listens on VHF Channel 16 but calls are seldom answered. Kasim Marine Terminal listens on 16 and contacts Pertamina office by telephone.

Advance notice. As per Charterer's instructions to Pertamina, Jakarta.

Tugs: Two tugs are available from Kasim Terminal (See "Sorong") to assist in berthing and unberthing.

Berthing: Berth is constructed of 2 mooring dolphins and 2 breasting dolphins with storage barge "Wampum" being moored to the Western side of dolphins and export tanker being moored to the Eastern side.

Vessel may berth port or starboard side to, depending on stage of tide. The vessel is moored with 8 ropes forward and 8 aft, ropes being handled by mooring launches.

Two hoses of 10 in. are connected to ship's manifold by ship's crew. The barge is said to have a capacity of about 50,000 LT, the maximum loading rate of Salawati crude is 16,000 bbls/hr.

Vessels not having received inward clearance by 1500 hrs. local time at the latest will have to await the following daylight before proceeding towards Salawati.

Weather/Winds: Uniformly high temperatures, high humidities and abundant rainfall. Winds are usually light, with a seasonal reversal as N.W. and S.E. Monsoon, however, winds can reach a maximum of 75 m.p.h. during local storms.

Tide: Between 2–5 knots at berth and in Sele Strait, rise of tide about 2 m.

Repairs: Not available.

Supplies/Services: None available.

Shore Leave: Not possible.

AGENCY: Pertamina Shipping Directorate, Jakarta, handles all Agency matters for tankers.

SANTAN TERMINAL (Attaka): 00.06 S. 117.32 E. (See Plan Book)

LOCATION: The Terminal is situated on the East Coast of Kalimantan, Indonesia in the Makassar Strait. It is about 80 miles North of Balikpapan.

DOCUMENTS: If arriving from a foreign port the following documents may be required for granting pratique. Certificate of Registry, Ship's Construction Certificate, Load Line Certificate, Safety Equipment Certificate, Safety Radio/Telephone/Telegraph Certificate, Exemption Certificate, Cargo Certificate and De-Ratting Certificate. Also required will be last Port Clearance and Crew List.

Crude oil loading documents will be prepared at the Santan Terminal and when the vessel has been loaded the documents will be completed and final clearance formalities will be carried out on board.

Each Crew member should be in possession of an International Vaccination Card and Passport or Seaman's Book. Indonesian Immigration, Customs and port officials will board the vessel to grant clearance.

Flag Dispensation: Each tanker entering the Santan Terminal must have requested and been granted Flag Dispensation prior to its arrival. At the same time application should be made for provisional Pratique through the Directorate of Quarantine and if granted, a cable advice is sent to the harbour authorities. Port Health clearance is issued prior to the tanker's arrival and is also valid for departure. If Provisional Pratique is not granted a Port Health Officer will be provided. All of the foregoing is arranged through and by the Agent.

Customs and Immigration: In accordance with practice in Indonesian ports, the vessel's national flag, the Indonesian courtesy ensign, quarantine, immigration, Pilot and call sign flags must be displayed by all vessels approaching Santan. These signals shall be displayed continuously until clearance is granted.

The signals are as follows:

Sunrise to Sunset:	Quarantine Flag "Q"
Sunset to Sunrise:	Signal Lights (red over white)

The "N" flag should be flown until the Immigration Officer boards the ship. The "G" flag (request for Pilot) should be flown until the Mooring Master boards. The vessel should also fly its call sign, (signal letters). This signal may however be hauled down after the vessel is secured to the SBM. It must be flown again when the vessel is sailing and kept flying until after the vessel is clear of the anchorage area. As soon as the Mooring Master boards, the "G" flag should be replaced by the "H" flag which signifies that the Pilot is aboard. The tanker may fly the "P" flag if it is going to sail within 24 hours.

PILOTAGE: *Procedure when berth available on arrival:* A vessel for which a berth is available on arrival will be boarded by a Mooring Master in the anchorage area and providing that the vessel is in all respects ready to commence loading (except for the necessary deballasting) the Notice of Readiness will be accepted at the time of the Mooring Master boarding.

If the vessel is not in all respects ready to proceed to the berth, with main engines fully manoeuvrable, mooring ropes on deck, windlasses, winches, etc., in good working order and readiness, it will not be accepted until the Mooring Master is satisfied that all these conditions are met.

Also see "Operations".

ANCHORAGE: If vessels are obliged, or instructed, to anchor, they should do so in the recommended anchorage and on no account are they to manoeuvre or anchor West of Longitude 117° 33.5′ East unless a Mooring Master is on board. The depth of water is 40 m. with a bottom of mud/clay. Holding ground is considered good.

The Southern limit of the anchorage is defined by two buoys Number "10" coloured red and Number "12" coloured red and white chequers. At night both buoys show a white light flashing 1 second every 6 seconds.

The Southerly limit of a reef on the Northern side of the anchorage area is marked with a buoy numbered "11" and coloured black. At night this buoy shows a green light flashing green 1 second every 5 seconds. Another buoy coloured with red and black horizontal bands and marked with the letter "A" shows a group flash light showing 3 white flashes every 6 seconds.

All the buoys are fitted with radar reflectors.

READINESS: *Procedure when instructed to anchor on arrival:* A vessel which has been instructed by Santan Port Control to anchor on arrival should, after doing so, inform Port Control of the precise arrival time. According to the practice of the port, acceptance of the Notice of Readiness will coincide with this arrival time, providing:

a) Vessel is within scheduled date range.
b) That it is within the hours of daylight – deemed to be from 0600 hrs. local time to 1800 hrs. local time.
c) That it is not a Public Holiday or Sunday, unless the vessel is actually handled on that day.
d) That the Port is open.

An exception to clause (a) above, is when conditions allow night berthing, in which case the vessel will be accepted when the Mooring Master boards, or, should the vessel have been at anchor, when the anchor is aweigh, providing that the Mooring Master is then on board.

In addition to clauses (a), (b) and (c) above, vessels will not be accepted when arriving at an unreasonable time ahead of their last signalled estimated time of arrival. It is not the practice of the port to keep Pilots (Mooring Masters) on station in the anchorage. Santan Port Control maintains a continuous listening watch on Channel 16 VHF.

Notwithstanding anything in the foregoing, Notice of Readiness will not be accepted at a time when it is not the practice of the port to accept it.

Also see "General".

NAVIGATION:

Attaka Reef: The Attaka Reef is marked with a buoy coloured red and yellow chequers. At night it shows a white light flashing 2.5 seconds every 6 seconds.

Ship Approach Channel: The ship approach channel to the Santan Anchorage is marked with 4 buoys and numbered from seaward 2, 4, 6 & 8 respectively. At night they show a white light flashing 0.5 seconds every 2 seconds. The number 2 buoy is positioned at 00° 04′ 7.5″ South and 117° 47′ 39.5″ East. Ships should stay to the North of these buoys.

SBM: The SBM is fitted with a radar reflector and at night shows a Qk. Fl. W. light. One of the floating hose strings is fitted with two winker lights.

Inshore Area: Inshore of the SBM area a concrete pile beacon painted red and numbered "16" shows a white flashing light every 6 seconds and marks the Northerly limit of two dangerous reefs.

The work boat canal is marked by 2 buoys, the Northerly one numbered "15" and showing a white flashing light and the Southerly numbered "18" and showing a red light.

There is a beacon on each bank of the canal, at the shore line. The North bank beacon showing a white light and the South bank a red light.

Onshore Area: A radio antenna approx. 150 ft. high is located at approximately 0° 05′ 24″ South and 117° 26′ 34″ East. The mast shows fixed red air lights by night on the top and midsection.

MAX. SIZE:

Minimum Size Acceptable: The minimum sized tanker acceptable at the Terminal is the T-2 Class or equivalent of not less than 17,000 d.w.t.

Maximum Size Acceptable: The maximum sized tanker acceptable at the Terminal calling for a full cargo is 125,000 d.w.t.

RADIO:

Procedure for Appointing Agent: Owner should cable: Pertamina Ship Jakarta. The cable should appoint Pertamina as Agent to attend the tanker at Santan and should be sent 2-4 weeks prior to vessel's arrival.

Advice of Arrival: 72 hours prior to arrival at the Terminal vessels should advise the company of their estimated times of arrival by cable sent via "Pertamina's" coastal radio station at Balikpapan. They should also confirm or amend ETA when they are 48 hours and again when 24 hours, distant from the Terminal.

Union Oil Company of Indonesia cable address: Pertamina Tanjungsantan.

"Pertamina's" Coastal Radio Stations:

I. Name of station – Balikpapan Radio; Call Sign – PKN 2; Frequency – Keeps watch on 2182 kc/s A3, answers on 4415 kHz A3, 6520 kHz A3 (vessel's selection); Class – A3H-A3J; Power – 500 watt; Service – 24 hour; Location – 01° 16′ South, 116° 50′ East.

ETA messages sent to PKN2 should be addressed:

Pertamina Tanjung Santan =
Message ....
Master..............

As long as no direct contact exists with PKN2, ships send ETAs to PKI2 (See below).

II. Name of station – Jakarta Radio; Call sign – PKI2; Frequency – 500 kHz (operates on 452 kHz), 2182 kHz answers on: 4178, 4280.5, 4363, 4410, 6457.5, 6520, 6516 kHz. 8 mHz (operates on 8628 kHz); Class – A1 500 kHz; A3 2182 kHz; A1 8 mHz; Power – 1 kW, 500 kHz, 500 watt, 2182 Khz; 1 kW 8 mHz.

Service – 500 kHz H24, 2182 kHz 0400–0500, 0700–0800, 1000–1100, 1500–1600, 2000–2100, 2300–2400 hrs. GMT; 8 mHz 0100–0300, 0500–0600, 0900–1000, 1100–1200, 1400–1500, 1730–1900, 2100–2200 hrs. GMT.

Location: 06° 08′ 00″ S. 106° 50′ 00″ E.

ETA messages sent to PKI2 should be addressed:

Pertamina Tanjungsantan via PKN2 =
Message ....
Master..............

Details of Cable: The following information should be included in the cable:

Name of vessel and radio call sign.
ETA in GMT and date (local time is GMT+8 hours).
Cargo requirements.
Deballast time.
Maximum loading rate.
Vessels draft on arrival.
If there is any sickness aboard or clean bill of health.
Last port of call.
Any hull, bulkhead, valve or pipeline leaks on vessel which could affect loading or cause pollution.
Distance in feet from bow to vessel's loading manifold.
Flange dimensions of vessel's manifold connection if not to ANSI B76.5, B.S. 1560, Series 150 or equivalent.

VHF: Vessels equipped with VHF radio telephone should contact "Santan-Control" on Channel 16 (156.80 mc/s) when within range to request instructions. The language of the Terminal is English and Indonesian.

MOORING/UNMOORING: This description is only intended as a guide and may be varied as to the order in which lines are taken up etc. according to the circumstances prevailing at the time of mooring.

Moorings required from tanker: The ship must provide and have ready the following: Two mooring ropes and one rope messenger line on the forecastle.

The Approach: The ship approaches the buoy from down tide and wind, taking care to keep the wind right ahead. Adequate ballast must be retained on board to ensure that the vessel retains full manoeuvrability throughout the approach to the buoy and the actual mooring.

Bringing aboard the Mooring Lines: The vessel will be brought to a position close to the buoy with the vessel stopped in the water and with the buoy fine on the port bow. During the approach to the buoy and while mooring, a terminal work boat will keep the hoses pulled well clear to port. Under normal conditions the port rope will be the first taken on board. The Mooring Master will advise as to which rope is to be taken first and as to which fairlead this will be taken. The actual work of mooring will be done by a terminal work crew. The ship will lower a strong messenger line to the mooring boat who will in turn make this fast to the approach rope. The approach rope of 10 in. circumference will be hove aboard and will in turn be hove in until the chafing chain and triangular plate is centred in the fairlead.

Securing the Mooring Lines: While the approach rope is being hove aboard, a strong wire strop will be made fast to a set of forecastle bitts. To the end of this strop will be fitted a 50 ton shackle and the strop will be so made fast at the end and the shackle will be about 5 ft. inboard of the fairlead. The approach rope will be hove on until the large link of the chafing chain is sufficiently far inboard for it to be connected to the strop by the 50 ton shackle. When this is done the approach rope will be slacked off until the full weight comes on the strop/chafing chain/buoy rope. The buoy rope is 150 ft. long and is 12 in. circumference double nylon of plaited construction.

The approach rope can now be taken to the bitts to act as a preventer. The second rope is now taken aboard and made fast in the same way. When both the ropes are fast, good ropes or strops, provided by ship, can be made fast to the spare links on the chafing chains to back up the main moorings.

Fire Wires: A fire wire must be rigged on the starboard side for'd and on the stern. These must be tended throughout vessels stay at the SBM to ensure that they are kept within 2 to 3 feet of water. In case of fire the tugs would connect to these wires to pull vessel clear of the SBM.

Connecting Hoses: When the mooring is completed, the work boat holding the hoses clear will bring these alongside the ship in way of the port side manifold.

Unmooring: To unmoor from the buoy any extra back up lines that have been made fast to the chafing chains are slipped first. The approach ropes are then taken to the ship's windlass/capstan and the weight taken on them until the shackle between the strop and chafing chain is undone. With the vessel moving slowly astern the approach ropes are slacked off and finally slipped and allowed to float free. While the ship is unmooring, a terminal work boat will keep the floating hoses towed clear and will keep them clear until the ship has slipped the moorings and is clear of the buoy.

Strops and shackles will be provided by the Terminal and put on board as the vessel approaches the buoy. The ship must provide 2 mooring ropes at least 8 in. circumference and 100 fathoms long, a 4 in. circumference messenger line, and two rope lashings 4 in. circumference and 15 ft. in length. These lashings should be of manilla or polypropylene, nylon is not acceptable.

BERTHING FACILITIES: The sea Terminal consists of a "single point mooring" loading berth also known as a "mono-buoy" or "single buoy mooring". The berth is located at 00° 06′ 18.6″ South and 117° 32′ 18.8″ East.

The "single buoy mooring" is approximately 4.33 miles offshore in 28 m. of water. The submarine line to the "single buoy mooring" is 30 in. in diameter. A single string of 20 in. submarine hose connects the submarine line header to the "single buoy mooring". Two strings of 16 in. floating hose connect the "single point mooring" to the tanker rail hoses which are 12 in. in diameter. The hoses are always taken up on the port side.

Hose lifting Derrick Capacity: Tankers must be equipped with a hose lifting derrick with a lifting capacity in conformance with the table shown on page C2 of Appendix C to the International Oil Tanker and Terminal Safety Guide.

Manifold Connection Sizes: The minimum size manifold connection will be 8 in. The Terminal is equipped with flanged spools to also connect to 10 in, 12 in, and 16 in. manifolds. Tanker manifolds should terminate in ASA Series 150, flat face flanges.

Unless the Terminal is given adequate notice, tankers equipped with manifold flanges of other sizes or ratings will be rejected.

BALLAST/POLLUTION:

Adequate Ballast: Due to the exposed location of the crude oil loading berth, vessels are required to carry sufficient ballast for safe handling, having due regard to existing weather and sea conditions. A vessel found by the Mooring Master to be not adequately ballasted will be rejected.

Pollution: Owners and Masters are responsible to observe International Convention Laws and Indonesian government regulations concerning pollution of the sea, having particular regard for this area of the Makassar Strait.

Clean Ballast: As there are no ballast discharging facilities, vessels must arrive at the Terminal with clean ballast, ensuring that all pipelines, pumps and strainers have been flushed out prior to arriving.

The Mooring Master will inspect ship's ballast on boarding and has the power to reject any vessel that he deems would cause pollution of the sea area, in which case vessel must proceed to sea and return only when ballast is completely free of oil. Any vessel rejected because of dirty ballast will automatically nullify its notice of readiness and will lose any priority of position for loading. Ballast discharge should not be commenced without the prior agreement of the Mooring Master.

Bilges: Bilges must not be discharged while at the SBM or in the anchorage.

Inspection During Loading: At night the sea area around the vessel shall be adequately lighted, as frequent inspection by the Mooring Master will be made during the discharge of ballast. Any pollution whatsoever will be cause for rejection. Similarly, any hull leaks causing pollution during loading will be cause for rejection and the vessel will not be re-accepted unless satisfactory evidence of repairs has been certified by a qualified surveyor.

Cargo hose connections should be inspected during loading, drip-pans should be placed under the manifold, all unused cargo connections should be blanked off, sea-valves should be closed and lashed upon completion of deballasting and all scuppers must be securely plugged.

Fines and Claims: Any fines imposed by governmental authority for pollution shall be for the vessel's account.

OPERATIONS:

Mooring Master: A Mooring Master will board the vessel in the anchorage area and advise the Master on all manoeuvres relative to berthing and unberthing and connecting the hoses.

Vessels are requested to make a lee and have a pilot ladder long enough to reach the Mooring Master's launch. At night adequate lighting should be provided. Ships with more than 30 ft. freeboard should rig a pilot ladder to a position 3 ft. above the water and an accommodation ladder so rigged that the Pilot can transfer from the pilot ladder to the accommodation ladder once he is clear of the pilot boat.

Work Crew: Mooring and unmooring, lifting, lowering, connecting and disconnecting hoses will be done by a terminal work crew under the direction of the Mooring Master. Assistance from ship's personnel in operating windlasses, winches, etc. will be required. Ship's crew will assist in hose connection/disconnection/mooring/unmooring and carrying equipment from deck to forecastle as required. Any vessel whose crew do not give such assistance may be rejected and returned to the anchorage. Costs of such a delay would be for the ship's account.

Tankers Engines and Hose Lifting Derrick: Being an open roadstead, vessels must keep engines on standby during their stay in the berth. No repairs to main engines may be undertaken while in berth. Power must be kept on deck winches in case adjustments to mooring lines are found necessary. Ship's booms and deck winch must be capable of operating with a SWL in conformance with the table shown on page C2 of Appendix C to the International Oil Tanker and Terminal Safety Guide. Vessels with inadequate hose lifting equipment will be rejected.

Only the automatic turning gear should be used. If it should become necessary to turn the propeller(s) at revolutions greater than the minimum obtained by the automatic turning gear, application must be made to the Mooring Master in order that arrangements can be made to ensure that hoses are kept clear. The Mooring Master's written permission *must* be obtained before any such increase in revolutions.

Hanging Off Hoses: Small bitts for hanging off loading hoses should be provided in line with the loading manifold.

Safety: Every vessel which berths at the buoy shall remain under the charge of the Master who will take all steps necessary to preserve the safety and security of such vessel, crew and terminal personnel who may board in the execution of their various duties.

The Master of every vessel at anchor in the designated anchorage or secured to the SBM shall ensure that all parts of the vessel, to which any person may be lawfully required to proceed, are properly illuminated. Efficient and easy means of access shall be provided to every vessel at anchor or at the SBM and such access shall be adequately illuminated between sunset and sunrise.

No person(s) shall be permitted to board or leave the vessel other than by the gangway or other proper means provided for the purpose.

The Mooring Master may require the vessel to unmoor at any time he deems it necessary for the safety of the vessel or the moorings or for infringement of Port Regulations.

Unsatisfactory conditions will be reported to the company's Marine Superintendent, who is empowered to reject a vessel for future calls unless the reported deficiencies have been remedied.

Sufficient Crew members must be immediately available at all times to assist with any or all operations on board the vessel at the Terminal.

LOADING: *Loading Rate:* Maximum loading rate will be about 30,000 bbls.p.h. It is recommended that vessels take maximum flow with due regard to safety in order to expedite turn around time as well as to provide ballast as quickly as possible. Care should be taken not to overload, as there is no possibility whatever of pumping back ashore. When vessels are equipped with permanent ballast tanks, the ballast in these tanks should be retained on board until the vessel has taken on board sufficient cargo to be manoeuvrable. Vessels not so equipped should examine the possibility of safely loading and discharging ballast simultaneously, as such practice improves turn around time as well as reducing the possibility of breaking out of the berth in bad weather in a completely light condition.

Closing Valves Against Oil Flow: Warning is given of the danger of closing valves against an incoming oil stream. This will create excessive pressures which may result in damage to the loading hoses, sea-line and Terminal facilities. Vessels will be held liable for damages resulting from failure to observe this precaution.

Radio Contact: During loading operations the vessel will contact the Terminal despatcher ashore every half hour by the assigned VHF channel to ensure that radio contact is being maintained. Pumping will be stopped immediately if it is found that radio contact with the ship has been lost.

In addition to the ship's VHF the Mooring Master will carry a portable radio, of approved design, with which he will be able to contact the shore terminal and mooring launches.

Mooring Launch: Throughout the loading operation a terminal mooring launch will be in attendance at the ship to tend hoses etc.

Every vessel requiring a shore stop will be required to inform the Mooring Master at start of loading and sign the form carried by the Mooring Master, requesting shore stop. When requesting a "Shore Stop", Masters must understand that Union Oil Co. of Indonesia accept no responsibility for any errors in the quantity. Should the cargo asked for, overload the vessel, it is not possible to pump oil back from the ship to the shore.

CUSTOMS: Cigarettes, cigars, tobacco, matches, spirits, wine, beers, perfume, arms, ammunition and possibly other items have to be locked up under customs seal from time of arrival of ship in port until time of leaving territorial waters. Each person is allowed to bring in 200 cigarettes or the equivalent in grams of tobacco or cigars. Special allowances are made for the Master under special circumstances. The Customs officer will seal the stores.

FACILITIES: There are no facilities of any kind at Santan. There are no engineering repair shops; no fresh water; no bunkers available; no provisions or stores; no crane or barge service; no shore leave; no crew changes; no consulates available.

GENERAL: *Exact Arrival Time:* It is stressed that vessels must advise Port Control of their exact arrival time, as failure to do so may lead to loss of their berthing turn.

Lay Time: Lay time will be calculated as outlined in the Crude Off-Take Procedure, Attaka Unit.

Conditions of Use of Port: The Master of each tanker will be given a copy of the Conditions of Use of Port of Santan Marine Terminal, which he will be asked to sign.

Delay Due to Excessive Deballasting: Delays in commencement of loading due to deballasting in excess of 6 hours will be deducted from the laytime.

Floating Logs: Masters are advised to keep careful watch on the approaches for semi-submerged or floating logs which may become hazardous to safe navigation.

Charts: Charts for the area are as follows:

1. Republic of Indonesia, Chart 130, East coast of Kalimantan, Balikpapan to Muara Berau.
2. Republic of Indonesia, Chart 37, East coast of Kalimantan, Muara Berau Kutie River to Cape Mangkalihat.
3. U.S. Naval Oceanographic office, old Chart H.O. 3044, new Chart N.O. 72014 Borneo East coast. Sandakan Harbour to Sungai Mahakam.
4. U.S. Naval Oceanographic office, old Chart H.O. 6185, new Chart N.O. 72110 Borneo East coast, Tanjung Mangkalihat to Tanjung – Tamarong.
5. British Admiralty, Chart 2636, North part of Strait of Makassar.
6. British Admiralty, Chart 2660, China Sea – Southern Portion.
7. British Admiralty, Chart 941-B, Eastern Archipelago.

Sailing Directions: Sailing directions are in the following: Eastern Archipelago Pilot, Vol II. 7th Edition, 1961.

Hydrographic Survey: A detailed hydrographic survey was carried out from November 1971, to January 1972, of an area between Latitudes 0° 03′ S. and 0° 13′ S. and extended from the shore line to some 20 miles offshore. Charts are available on request from the Terminal showing the results of this survey for the approaches to the Terminal on a natural scale of: 1:25,000 and for the anchorage and loading area on a natural scale of 1:12,500.

SHIPMASTER'S REPORT: 1976

Situated about 80 miles North of Balikpapan on the East coast of Borneo, in 00.07 S. 117.28 E., the only chart available BA2636 is of too small a scale to advise safe first time entry in darkness. So, after a number of unsuccessful attempts to contact Santan Terminal for instructions – only the latter portion of his transmissions were being received, and very underpowered, it was decided to await daylight, cruising on 118.00 Meridian.

At 0600 hrs. vessel was again in the vicinity of Attaka Buoy, Pilot contacted by VHF 16. He instructed us to proceed 270° T and he would meet us, East of SBM. The SBM is located about 4.5 miles offshore, marked by a QK.FL.W. light, vis. 6 miles, and is impossible to distinguish from Attaka Buoy.

The best approach is to reach a point 4 miles North of Attaka Buoy which has a Ra.Refl. and was identified at just under 12 miles. From thence, subject to the Master's assessment of the situation, and assuming possession of a copy of the Chartlet, to proceed inward on 257° T, which will take him along the Approach Channel. But he should be prepared for quite strong set to North or South – this being my experience, both inward and outward. Pilot states that up to 125,000 d.w.t. can be handled. Originally, the channel had 4 buoys, marking the South side of the channel, but the outer 2 have been withdrawn. Channel has been swept and min. depth shown is 50 m. Each buoy has a Ra.Refl. and with 3.5 mile spacing, are easy to track on radar and visually, once their existence is known, from the Chartlet.

An anchorage area exists between 0.5 and 2 miles East of the SBM, bounded by 3 buoys to West side and 1 to South. These mark Coral Shoals. The Pilot said it was acceptable to come straight in from Attaka Buoy, in ballast, but loaded vessels must stay in Swept Channel, as the possibility of isolated Coral Heads exists, and the area South of the channel has not been fully swept.

A mooring/hose party boards with the Pilot, and takes care of these duties, the vessel only being required to provide an officer and 2 winchmen on the foc's'le and an officer and winchman for connecting the hoses (2×16 in.). A ship's mooring line is lowered to the launch to pick up the port SBM polypropylene line, this finally brings up a chain (approx. 8 in. dia. link). A special very flexible wire, provided by shore, is secured round both Port and Starboard forward bitts on foc's'le head, with an eye at each end projecting forward. The mooring chain is then shackled to this. A stout messenger is acceptable for picking up the starboard mooring, but it is advisable to have a second mooring line available on deck in our opinion. The chain is then shackled to the South eye of the shore wire, which is around the bitts. There is no provision for quick release gear, so letting go in an emergency, e.g. wind, would not be easy.

Hoses are 16 in., but fitted with 12 in. flanges (not reducers) and are bolted to manifold, again no quick release provided. Pilots' estimate of weight of each hose is 7.5 tons. Hoses are hung off on chains passed round manifold supports, instead of cruciform bollards – apparently because of the length of chain used. Hose/mooring party work well and safely.

EDP is not available, and vessel had to lie awaiting papers after leaving SBM for about 40 minutes, after which passage outward along the channel was without problem, with adequate water depths all the way.

Radio messages are sent via Balikpapan PNK2 to Petroleum Balikpapan, but appears to be on only 2 hours a day. But Pilot said they had not received our ETA's, but said this was quite normal. Agents were Pertaminaship Jakarta. No relief facilities, stores, water or bunkers available, and mail both in and out not advised, due uncertain delivery.

SEMARANG: 07.01 S. 110.27 E.

DOCUMENTS:
Crew Lists.
Passenger Lists (if any passengers to be disembarked).
Customs Documents.
Health Clearance from last port of call.
Harbour Report forms supplied by Harbour Master.

PILOTAGE: Ships with deadweight of more than 900 tons and with draft of more than 3.5 m. must anchor in roads. To enter the Harbour, Pilot required. Pilot can be applied for by raising "G" flag while ship is anchoring/arriving.

ANCHORAGE: Anchorage 3 nautical miles from coast, where depth 9 m. For smaller ships safe anchorages 1,900 m. from pier, where depth 5–7 m.

HEALTH: Vessels arriving must hoist "Q" flag. Work can only begin after inspection of security team boarding vessel upon arrival during working hours.

RADIO: Name, Semarang Radio. Call sign, PKR.

TUGS: Normally tugs join vessel in roads.

BERTHING: Ships anchoring in roads can anchor any time of day. For berthing alongside quays ships with a draft max. 3.6 m. require Pilot. Entering port guided by a pilot vessel.

STEVEDORES: Necessary to inform Agent exact time of arrival. Labour gangs to be arranged 1 day before. Also details of cargo to be discharged needed to arrange stevedoring materials, especially for ships anchoring in roads.

MEDICAL: Medical assistance can be given upon ship's arrival. First aid can be given by harbour doctor in harbour area. Serious cases taken to hospitals in town. 4 hospitals available. Port Health Officer can issue vaccination/fever Certificates if required.

FRESH WATER: Can be supplied by 100 ton barge once every 2 days. Suggest take on water in Jakarta or Sourabaja.

GANGWAY/DECK WATCHMEN: No gangway/deck watchmen needed.

OPENING/CLOSING HATCHES: Opening and closing hatches done by stevedores.

CUSTOMS ALLOWANCES: 200 cigarettes or equivalent in tobacco permitted for each crew member to hold out of bond. Wine and/or spirits, maximum value of U.S. $10.

IDENTIFICATION CARDS: Needed.

CONSULS: No local representation.

REPAIRS: Minor repairs only. Small dock only for repairing vessels no longer than 36 m.

REPATRIATION: Repatriation of crew members arranged by Agents by contacting Immigration Officer for permits concerned.

AIRPORT: 5 mins. drive from harbour. Domestic flights only.

TIME: GMT plus 8 hours.

HOLIDAYS: New Year. (1st January); Independence Day (17th August); Id el Fitr; Christmas Day (25th December).

POLICE/AMBULANCE: Semarang 245 or 726.

TELEPHONES: No facilities for placing telephones on board.

SHORE LEAVE: Crew members allowed ashore.

DELAYS: Normally the speed of loading of bulk cargo is 20–25 tons 1 gang/hours. Delays by bad weather during December, January and February, where it is impossible to come out of the inner port to ships anchoring on the roads.

AUTHORITY: Administrator Pelabuhan Semarang.

SENIPAH TERMINAL: 01.03 S. 117.13 E.

(See Plan Book)

OPERATOR: Total Indonesie.

LOCATION: The Sea Terminal consists of a SBM (Single Buoy Mooring), loading berth also known as "mono-buoy". Berth is located in position Lat. 1° 03′ 05″ S., Long. 117° 13′ 13″ E.

The Terminal is situated about 45 km, N.E. of Balikpapan on East Coast of Kalimantan, Indonesia, at position 0° 58′ 05″ S., 117° 08′ 27″ E.

DOCUMENTS: Indonesian Immigration, Customs, Harbour Master and Port Officials will board the vessel to grant clearance and will require the following for inspection:

3 Crew Lists.
1 Crew Declaration of Personal Belongings.
1 Ship's Store List (inventory).
3 Passenger Lists (if any).
1 Cargo Manifest for Transit Cargo with a summary.
Clearance from the Last Port of Call.
Valid Passport and/or Seaman's Certificate for all Crew Members.
Smallpox Vaccination Certificates for all Crew members or passengers of date not exceeding 3 years.
Certificate of Inoculation against any contagious diseases.

If arriving from a foreign port, the following documents may be required for granting pratique: Certificate of Registry; Ship's Construction Certificate; Load Line Certificate; Life Safety Equipment Certificate; Safety Radio/Telephone/Telegraph Certificate; Cargo Gear Certificate and De-Ratting or Exemption Certificate.

Crude oil loading documents will be prepared at the Senipah Terminal and when the vessel has been loaded, the documents will be completed and final clearance formalities will be carried out on board.

Procedure for Appointing Agent:

Owner should cable/telex: PERTAMINASHIP JAKARTA.

The cable/telex should appoint Pertamina as Agent to attend the tanker at Senipah and should be sent 7 days prior to vessel's arrival.

The above procedure is applicable to vessels whose Operators do not have a long term agreement with Pertamina.

Flag Dispensation/Agency Permit:

Each foreign tanker entering Indonesia for lifting from Senipah Terminal must have been granted flag dispensation/security clearance prior to entering Indonesian waters.

At the same time application should be made for Provisional Pratique through the Directorate of Quarantine and, if granted, a cable advice is sent to the Harbour Authorities.

Port Health Clearance is issued prior to the tanker's arrival and is also valid for departure clearance. If Provisional Pratique is not granted a Port Health Officer will be provided. All of the foregoing is arranged through and by the General Agent.

It is vital that TOTAL INDONESIE, Jakarta receives the following information by telex 7 days before the vessel's arrival in order to apply for flag dispensation/security clearance through the General Agent.

1. Name and address of owners.
2. Name of Vessel and radio call sign.
3. Flag.
4. D.W.T., G.R.T. and N.R.T. of vessel.
5. Name of Master.
6. Number of Crew.
7. Last foreign port of call and ETD.
8. Consignee.
9. Destination(s) after Loading.
10. ETA at Senipah Terminal.
11. Quantity and grade to be loaded.

FLAGS: In accordance with practice in Indonesian ports, the vessel's national flag, the Indonesian courtesy ensign, quarantine, immigration, pilot and call sign flags must be displayed by all vessels approaching Senipah. These signals shall be displayed continuously until clearance is granted.

The signals are as follows: Sunrise to Sunset: Quarantine Flag "Q". Sunset to Sunrise: Signal lights (red over white).

The "N" flag should be flown until the Immigration Officer boards the ship. The "G" flag should be flown until the Mooring Master boards. The vessel should also fly its call sign (signal letters). This signal may, however, be hauled down after the vessel is secured to the SBM. It must be flown again when the vessel is sailing and kept flying until after the vessel is clear of the anchorage area and the Berthing Master has left. As soon as the Mooring Master boards, the "G" flag should be replaced by the "H" flag. The tanker may fly the "P" flag if it is going to sail within 24 hours.

PILOTAGE: *Procedure when berth is available on arrival.*

A vessel for which the berth is available on arrival will be boarded by a Mooring Master in the anchorage area and, providing that the vessel is in all respects ready to commence loading (except for the necessary deballasting) the notice of readiness will be acknowledged as soon as tendered to the terminal by the Master of the vessel.

If the vessel is not in all respects ready to proceed to the berth, with main engines fully manoeuvrable, 6 mooring ropes on forecastle head, windlasses, winches, etc., in good working order and readiness, it will not be accepted until the Mooring Master is satisfied that all these conditions are met.

The Mooring Master will advise the Master on all manoeuvres to berthing and unberthing and connecting the hoses.

Vessels are requested to make a lee and have an accommodation ladder long enough to reach the Mooring Master's launch.

At night, adequate lighting should be provided.

When Mooring Master boards all mooring and hose equipment will be lifted on board from the mooring launch.

NAVIGATION AIDS:

S.B.M. The S.B.M. has a 360° white light, flashing 6 times per minute, visible for 5 miles under an atmospheric transmissivity of 0.85. This operates from sunset to sunrise.

The floating hose has 3 marker beacons along the string, placed one at every 7 sections of hose. This light is mounted in a vertical position on one of the hose flanges. The 90 mm. lamp has a flashing rate of between 20–60 flashes per minute, and is visible at up to 1,850 m. (1 nautical mile).

Oil platforms: Oil platforms of Bekapai oil field which are situated approximately 17 miles East by North of Senipah SBM, show at night a white light flashing, 2 short and 1 long flash (letter U).

Marking buoys: The submarine pipe-line bringing the oil from Bekapai field to the Terminal, as well as the recommended anchorage area, are intended to be marked in the future.

The buoys to be used for this purpose are presently under study.

ANCHORAGE: If vessels are obliged, or instructed to anchor, they should do so in the recommended anchorage area which is centred at position: 1° 05′ 29″ S., 117° 15′01″ E. and has a radius of 1 mile. Water depth is between 40 to 45 m. While at anchor they should exercise vigilance and keep in touch with the Terminal by VHF at all times.

Procedure when instructed to anchor on arrival: A vessel which has been instructed by Senipah Terminal to anchor on arrival should, after doing so, inform the Terminal of the precise anchoring time. According to the practice of the Terminal acknowledgement of the Notice of readiness will coincide with this anchoring time, providing:

a) That it is within the hours of daylight – deemed to be from 0600 hrs. local time to 1800 hrs. local time.
b) That it is not a Public Holiday or Sunday, unless the vessel is actually handled on that day.
c) That the Terminal is open.
d) That cargo is available in accordance with accepted loading date.

In addition to clauses (a), (b) and (c), above, vessels will not be accepted when arriving at an unreasonable time ahead of their last advised ETA. It is not the practice of the Terminal to keep Pilots (Mooring Masters) on station in the anchorage area. Senipah Terminal maintains a continuous listening watch on VHF (Channel 16 or 12).

MAX. SIZE:

Minimum size: Minimum size tanker acceptable at the Terminal is 50,000 d.w.t. However, on an exceptional basis, it will be possible to accommodate tankers of 33,000 d.w.t. minimum size.

Maximum size: Maximum size tanker acceptable lifting a full cargo will be 125,000 d.w.t.

Tankers of a larger size may be accommodated in the future, provided that Senipah is their first port of loading and that they load a part cargo only. These limits are at present under study.

Draft requirement on arrival: Vessels arriving at Senipah Marine Terminal should have the following draft:

d.w.t.	Fore	Aft
Under 60,000	19 ft.	27 ft.
Over 60,000	22 ft.	28 ft.

RADIO: *Advice of Arrival:* 72 hours prior to arrival at the Terminal, vessels should advise the Company of their ETA by cable sent via Pertamina's coastal radio stations at Jakarta/Merak/Balikpapan. They should also confirm or amend them when they are 48 hours, and again when 24 hours, distant from the Terminal.

Total Indonesie cable address: Totalindo Balikpapan. Attention: Senipah Marine Terminal and Totalindo Jakarta. Attention: Shipcoord.

Communication for Contacting Agent: PERTAMINA Jakarta radio/PKI2 (owned and operated by PERTAMINA).

Frequency kHz	Hours GMT	Keep Watch kHz
452*	H24	500
8628	0200–0300, 0400–0500, 0700–0800, 1030–1200 1400–1500, 1800–2000, 2200–2300.	8356–8374
12980	0000–0200, 0300–0400, 0500–0700, 0800–1030, 1200–1400, 1500–1800, 2000–2200, 2300–2400.	12534–12561
VHFCh. 9/16/19	0000–1500.	Ch.16

*Call/Reply

PERTAMINA Merak radio/PKQ (owned and operated by PERTAMINA).

Frequency kHz	Hours GMT	Keep Watch kHz
452*	0000–0400, 0800–1000, 1200–1400.	500
8626	0100–0200, 0900–1030, 1500–1600, 2300–2400.	8356–8374
4361.6	0000–0100, 0200–0300, 0800–0900.	2182, 4066 4063 A3J/A3H
6518.6	0300–0400, 1200–1400.	2182, 6204 A3JA3H
VHF Ch.16/19/24/26	H24	Ch.16

*Call/Reply

PERTAMINA Balikpapan radio/PKN2 (owned and operated by PERTAMINA).

Frequency kHz	Hours GMT	Keep Watch kHz
4415	H24	2182
6520	H24	8249 A3J/A3H
VHF Ch.16/19	H24	Ch.16

Note: All messages destined to "PERTAMINASHIP" can be sent to either PKI2, PKQ or PKN2.

Details of Cable: The following information should be included in the cable;

1. Name of vessel and radio call sign.
2. ETA and date in local time (GMT plus 8 hours).
3. Cargo requirements.
4. Deballast time.
5. Maximum loading rate.
6. If there is any sickness aboard or clean bill of health.
7. Last port of call.
8. Any hull, bulkhead, valve or pipe-line leaks on vessel which could affect loading or cause pollution.
9. Distance in metres from bow to vessel's loading manifold.
10. Flange dimensions of vessel's manifold connection, if not to ASA series 150 or equivalent.

Failure to advise Terminal of ETA may lead to loss of berthing turn.

VHF: Vessels equipped with VHF Radio Telephone should contact terminal on international mobile service Channel 16 (156.80 mc/s) and then communicate on Channel 12 from 0000–2400 hrs. GMT.

Other Channels used are 6–9–19.

The language of the Terminal is English, French, and Indonesian.

BERTHING: The SBM is approximately 6 miles (11.1 km) offshore in approximately 28 m. of water.

The SBM is served by 2 submarine lines of 26 in. diameter. Two strings of 20 in. hose connect the SBM to submarine line header. Two 20 in. floating hose strings reduced to 12 in. are connected to Tanker for loading purposes. Hoses are lifted up and connected individually on port side. For quick connection/disconnection to ships manifold hose ends are fitted with "Camlocks".

Work Crew Service: Mooring, unmooring, lifting, lowering, connecting and disconnecting hoses will be done by ship's crew under the direction of the Mooring Master and assistance of Terminal crew.

Accommodation and meals: The company Mooring/Loading Master and his crew (3 to 4 persons) stay on board the tanker during the time of the operations. Free accommodation and meals of the same standards as those of the Tanker's officers (for the Mooring Master) and of the Tanker crew (for company crew) must be provided.

Tanker's Engines: Being on open roadstead, vessels must keep engines on standby during their stay in berth. No repairs to main engines may be undertaken while in berth.

Only the automatic turning gear should be used. If it should become necessary to turn the propellor(s) at revolutions greater than the minimum obtained by the automatic turning gear, application must be made to the Mooring Master in order to ensure that there is no inconvenience to do so.

The Mooring Master's written permission must be obtained before any such increase in revolutions.

MOORING/UNMOORING: *Method of Securing to Buoy:* This description is only intended as a guide and may be varied as to orders of lines etc. according to circumstances and weather prevailing at time of mooring.

When Mooring Master boards all mooring and hose equipment for the job on hand will be lifted from the mooring launch.

The Approach: The vessel will be brought to a position close to the buoy with vessel stopped in water with SBM fine on port bow. During approach to SBM, one mooring launch will keep hoses well clear of vessel. Under normal conditions the starboard SBM rope will be the first rope taken on board. Mooring Master will advise which rope will be taken first. Actual work of mooring will be done by ship's crew with assistance from terminal work crew. Vessel will lower a mooring rope with good lashing on eye to the mooring launch which will make this fast to approach rope. The approach rope of 10 in. circumference polypropylene will be hove on board until the chafing chain is approximately centred in the fairlead.

Securing the Mooring Lines: While approach is being made, two 11 in. rope strops will be made fast one on each side to the forecastle bitts. To the end of each strop will be attached a 50 ton shackle with pin removed. This shackle should be lying between 2 to 3 m. in board of fairlead. When sufficient chafing chain has been heaved on board, the eyes of the ship's lines will be shackled on to the end links of the chain. The approach rope will then be slackened off so that all weight is on the ship's lines. This will be backed up by an 11 in. rope strop provided by the terminal similarly attached to the chain and used as preventer. The second rope is made fast in the same manner.

Connecting hoses: When mooring is completed a work boat holding the hoses clear will bring the hoses alongside the port side manifold for connection. When hose connection is completed the mooring launch will be made fast by a mooring rope through the centre lead aft so as to be in position to tow as necessary.

Unmooring: To unmoor from the SBM all extra back up lines that have been secured are slipped first. The approach rope is then taken to ship's windlass/capstan and hove up until sufficient chain is in board to remove shackles from the ship's lines and terminal strops. When the vessel is moving slowly astern the approach ropes are slackened off into the water and finally slipped until allowed to float free.

LOADING:

Loading Rate: Maximum loading rate will be nearly 40,000 barrels (6,000 metric tons) per hour. It is recommended that vessels take maximum flow with due regard to safety in order to expedite turn around time as well as to provide ballast as quickly as possible.

Care should be taken not to overload, as there is no possibility whatever of pumping back to Terminal. When vessels are equipped with permanent ballast tanks, the ballast in these tanks should be retained on board until the vessel has taken on board sufficient cargo to be manoeuvrable. Vessels not so equipped should examine the possibility of safely loading and discharging ballast simultaneously, as such practice improves turn around time as well as reducing the possibility of breaking out of the berth in bad weather in completely light condition.

Hose Lifting Derricks – Deck Winches: Ship booms and deck winches must be capable of operating with a SWL of 5 tons for tankers to be secured to the SBM. Vessels with inadequate hose lifting equipment will be rejected. Power must be kept on deck winches in case adjustments to mooring lines are found to be necessary.

Manifold sizes: The hoses at the terminal are 12 in. in diameter. The minimum size manifold connection acceptable will be 8 in. Terminal is equipped with flanged reducers to connect 8 in. – 10 in. and 16 in. manifolds.

Tanker manifolds should terminate in ASA series 150. Unless terminal is given adequate notice, tankers equipped with other sizes or ratings will be rejected.

Grades of crude oil available: There are 2 grades of Crude Oil available at Senipah Marine Terminal, namely, Bekapai Crude Oil and Handil Crude Oil. Vessels lifting Bekapai Crude are not required to heat the oil during voyage to the discharge port.

Vessels lifting Handil Crude Oil are required to be equipped with heating coils.

It is recommended, as from commencement of loading of Handil Crude, the vessel should endeavour to maintain a temperature of 105°F or at least a temperature slightly above the pour point until the time the vessel discharges its cargo at the unloading port.

In case a vessel has to load 2 parcels of cargo (i.e. 1 Handil 1 Bekapai), loading must be stopped between the two parcels for line flushing with the second grade of oil.

Outward clearance: A tanker will be considered clear to depart Senipah Terminal when the crude oil loading documents have been delivered to the Master.

Any protests by the Master concerning the quantity of cargo should be made before departure and any resulting investigation should be made before the vessel sails.

BALLAST:

Adequate ballast: Due to the exposed location of the crude oil SBM berth, vessels are required to carry sufficient ballast for safe handling, having due regard to existing weather and sea conditions. A vessel found by the Mooring Master to be not adequately ballasted will be rejected.

Pollution: Owners and Masters are responsible to observe International convention laws and Indonesian Government regulations concerning pollution of the sea, having particular regard for this area of the Macassar Strait.

Clean ballast: As there are no ballast discharging facilities, vessels must arrive at the Terminal with clean ballast, ensuring that all pipe-lines, pumps and strainers have been flushed out prior to arriving.

The Mooring Master will inspect ship's ballast on boarding and has the power to reject any vessel that he deems would cause pollution of the sea area, in which case the vessel must proceed to sea and return only when ballast is completely free of oil. Any vessel rejected because of dirty ballast will automatically nullify its notice of readiness and will lose any priority of position for loading. Ballast discharge should not be commenced without the prior agreement of the Mooring Master.

Bilges: Bilges must not be discharged while at the Terminal.

Inspections during loading: At night the sea area around the vessel shall be adequately lighted, as frequent inspection by the Mooring Master will be made during the discharge of ballast. Any pollution, whatsoever, will be cause for rejection. Similarly, any hull leaks causing pollution during loading will be cause for rejection and the vessel will not be reaccepted unless satisfactory evidence of repairs has been certified by a qualified surveyor.

Cargo hose connections should be inspected during loading, drip-pans should be placed under the manifold, all unused cargo connections should be blanked off, sea-valves should be closed and lashed upon completion of deballasting and all scuppers must be securely plugged.

CUSTOMS ALLOWANCE: Cigarettes, cigars, tobacco, matches, spirits, wine, beers, perfume, arms, ammunition and possibly other items have to be locked up under customs seal from time of arrival of ship in port until time of leaving territorial waters. Each person is allowed to bring in 200 cigarettes or the equivalent in grams of tobacco or cigars. Special allowances are made for the Master under special circumstances.

The Customs Officer will seal the stores.

SERVICES: There are no facilities of any kind at Senipah:

There are no engineering repair shops.
No fresh water.
No bunkers available.
No provisions or stores.
No crane or barge service.
No shore leave.
No crew changes.
No consulates available.
No clinic available.

GENERAL:

Floating Logs: Masters are advised to keep careful watch on the approaches for semi-submerged or floating logs which may become hazardous to safe navigation.

AGENCY: Pertamina Shipping Directorate, 32-34, Jalan Jos Sudarso, PO Box 327, Tanjung Priok, Jakarta, Indonesia. Cable address: Pertaminaship Jakarta. Phone numbers: 290312–290322 (11 lines), Ext. 225 and 315 and 425. Telex number: 42885 Jakarta.

SORONG (Kasim Terminal): 01.18 S. 131.01 E.

(See Plan Book)

LOCATION: The terminal is located on the Island of Jef.

DOCUMENTS:

Certificate of Register.
Load Line Certificate.
Safety Equipment.
Safety Construction Certificate.
Radio Certificate.
Derating Certificate.
6 Crew Lists.
6 Vaccination Lists.
2 Crew Declaration.
2 Stores Lists.

PILOTAGE: Compulsory. Pilot boards in-bound vessels in position 00° 53′ S. 131° 10′ E. Vessels berth and unberth at any stage of the tide during the day.

Accommodation ladder not required; pilot ladder is sufficient. Also see "Anchorage". Vessels must make a lee for Pilot boat in choppy seas.

ANCHORAGES: Recommended anchorage area is 4.5 miles West of Sorong in position 00° 53′ S. 131 10′ E. Under no circumstances should the vessel enter the restricted area around the structure without the Mooring Master aboard.

Any vessel arriving in the anchorage area after 1600 hours local time may have to wait in the anchorage area until first light the next morning to transit the Sele Strait to the terminal.

On arrival at anchorage contact "Sorong Control" on VHF Channel 16 and between hours of 0600 and 1800 contact Kasim Marine Terminal Channel 16.

RESTRICTIONS:

	Controlling depth (MLW)	*Mean tidal range*	*Velocity of current*	*Nature of bottom*
Entrance:	51 ft.	Approx. 5ft.	Max. 7 kt.	Sand, mud
Channel:	51 ft.	,,	,,	Sand, rock, coral
Anchorage:	120 ft.	,,	,,	Rock, sand
Berth:	60 ft.	,,	,,	Sand, rock, coral

MAX. SIZE: The channel is swept to a depth of 57 ft. Vessels max. draft is 51 ft. Also see "Berthing".

PRATIQUE: Available night and day Customs and Immigration board on arrival.

RADIO: *Advice for arrival:* 72 hours prior to arrival at Sorong vessels should advise the Company of their estimated time of arrival by cable sent via "Pertamina's Coastal Radio" Station at Jakarta or

Government Radio Station at Sorong. They should also confirm or amend them when they are 48 hours and again 24 hours, distant from Sorong.

Cable address: Pertamina, Unit 5, Sorong.

Cable address: Pertamina – Jakarta.

Name of the station: Jakarta Radio. Call signal: PKI-2.

Frequency	*Class*	*Power*	*Nature*	*Service (hrs.)* (GMT)
452 kc/s.	A1	1 kW	CR	0000–0200—0400–0600 0800–1000—1200–1400
8,626 kc/s.	A1	1 kW	CR	0200–0300—0400–0500 0700–0800—1030–1200 1400–1500—1800–2000 2200–2300
12,980 kc/s.	A1	1 kW	CR	0100–0200—0500–0600 0900–1030—1200–1300 1500–1600—1700–1800 2000–2100—2300–2400

Sorong Radio Station: Call signal: PKY–41

Frequency	*Class*	*Service*
6518.6 kc/s.	SSB	H.24
6518.6 kc/s.	SSB	H.24
8755 kc/s.	AM	0000–0100
8730 kc/s.	AM	0200–0300

The following information should be included in the cable:

(1) Name of vessel and radio call signal.
(2) ETA in GMT and date (local time GMT plus 9 hours).
(3) Cargo requirements.
(4) Deballasting time.
(5) Maximum loading rate.
(6) If there is any sickness on board or clean bill of health.
(7) Flange dimension of vessel's manifold connection.

TUGS: 2 tugs of 45 ton bollard pull each tug.

BERTHING: Berthing is usually daylight hours but night berthing undertaken if required. It is not unusual to undock with a strong stern tide running.

Kasim terminal is owned by Petromer Trend. Maximum size of vessel at the berth is, length 1,000 ft., beam 150 ft., and draft 51 ft. Depth of water 60 ft. (LW).

The berth is a standard type of tanker berth with 4 breasting dolphins and a loading platform set back inside the line of breasting dolphins. 4 mooring dolphins are set at intervals along the length of the berth and are fitted with quick release hooks and electric winches to handle light rope messengers.

Loading is through two 16 in. Chiksan loading arms and vessels with non-standard manifolds must provide their own reducers. Max. loading rate 60,000 bbls. p.h.

Loading arms are connected and disconnected by terminal staff.

The Kasim Marine Office is situated ashore level with mooring dolphin No. 2. A Mooring Master remains on board throughout the vessels stay and is in radio contact with the tank farm, pump station and Marine Office. The berth has its own gangway which is placed onboard the ship by shore crew.

DRY CARGO BERTH: 370 ft. long with depth of 20 ft. MLWS alongside vertical wooden face with rubber fendering. 2 cranes available for discharge/loading with SWL 40 and 60 tons.

MEDICAL: Doctor available.

FRESH WATER: Available at US$2.40 per ton.

FUEL: Not available.

REPAIRS: Can be undertaken at Sorong but not at Kasim Terminal.

CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle of spirits.

REPATRIATION: Possible in an emergency.

TIME: GMT plus 9 hours.

SHORE LEAVE: No shore leave.

GENERAL: Before sailing it is necessary that Sorong Harbour Master is aboard. No stores but clinic available.

During daylight hours Indonesian flag must be flown.

AGENT: 2 to 4 weeks before arrival, vessels must appoint as General Agent Pertaminaship, Jakarta 3234 Yos-Sudarso, P.O. Box 327, Tanjung Priok, Jakarta, Indonesia.

Telex JKT 2885, Answerback: Pertamina. Tel. 290 312 Ext. 217.

SOURABAJA (Tandjong Perak): 07.12 S. 112.44 E.

(See Plan Book)

DOCUMENTS: Upon arrival vessels have to produce the following Certificates and Documents, which will remain in the Harbour Master's custody until cleared:

Nationality (Registry) Certificate.
Seaworthiness Certificate.
Measurement (Tonnage) Certificate.
Deratisation (Exemption) Certificate.
International Load Line Certificate.
Safety Certificate (passenger ships).
Safety Equipment Certificate (cargo ships).
Safety Radio and Radiotelephony Certificate (cargo ships).
Certificate of Approval (ship's radio station).
Health Book or Bill of Health.
Last Port Clearance.
Subscription of Light and Harbour Dues and wharfage if any.
Crew Lists and Passenger's List.
Ship's Articles.
2 Stores Lists.

PILOTAGE: Pilots are in Government service. Pilot signals according to International Code of Signals. Pilots have to be ordered by Agent 24 hours before arrival and 6 hours before departure.

Compulsory Pilotage, consisting of sea and harbour pilotage.

Western Channel: The sea Pilot will board the vessel at the entrance of the Western Channel from pilot launch stationed at Karang Jamuang position 06° 55′ 43″ S. 112° 43′ 46″ E. Application for Pilots can be cabled via above radio station and must be received at least 24 hours prior to the ship's arrival at the boarding area, by the Harbour Master of Tg. Perak. Upon arrival at the Pilot station by day, ships should hoist the International Code Flag "G" and the Ship's International Call Sign. Pilot station on VHF Channel 12, from 0600 hrs. – 0000 hrs. Pilot boat on VHF 12, 14 and 16. The following local signals regarding Pilots should be observed if shown by the pilot vessel:

(a) By night: a flare-up light (white) or waving a white light above the railing means: Pilot will soon board your vessel.

(b) By day: the First Substitute over the Code Flag "S" means: no Pilot available, vessel allowed to proceed until she meets the Pilot. By night: a red light over a white light.

(c) By day: 2 black cones 1 vertical over the other points downwards or by night: 2 green lights 1 over the other means: no Pilots are available for ships of less than 10,000 cu.m. gross. If this signal is made by the Pilot, vessels do not have to show the pilot signals.

(d) By day: the International Signal GFM or by night: a green light over a white light means: Pilot will board your vessel by row-boat as no motor-boat is available.

Eastern Channel: No pilot vessels. Pilots will board the vessel at the entrance by means of a pilot barge dispatched from Tg. Perak Pilot station at the Harbour Master's office.

Sea Pilot will take the vessel up to the Inner Roads, where the Harbour Pilot takes over.

ANCHORAGE: Waiting anchorage for Pilot within: 06° 51′ S. 112° 45′ E.; 06° 51′ S. 112° 47′ E.; 06° 52′ S. 112° 47′ E.; 06° 52.5′ S. 112° 45′ E. Depth 22 m. at LWS.

RESTRICTIONS: There are 2 entrances: Western and Eastern Channels.

Western Channel: Used for deep-drawing vessels with depth of 9.0 m. at LWS. Distance to Tg. Perak about 25 miles.

Eastern Channel: Least bar depths through this channel is 4.0 m. at LWS. Distance to Tg. Perak is about 16 miles.

Boarding Area: Harbour Pilots, Quarantine Officer and Immigration will board the vessel at the Inner Roads (anchorage).

MAX. SIZE: The max. draft for vessels entering the access channel to the port is 31 ft. 03 in. with a max. LOA of 210 m.

IMMIGRATION: (Department of Defence and National Security). Vessels arriving from abroad with passengers must hoist the "N" Flag. Masters have to supply the boarding Immigration Officer with Passenger's List of: *(a)* disembarking. *(b)* transhipping. *(c)* through passengers.

No persons are allowed on board until the vessel has been examined and the "N" Flag taken down. Passengers must be in possession of a valid visa: visitor's, entry or a transit visa. Those not having a visa may at the discretion of the Immigration Officer, obtain a landing permit. Members of the crew including the Master must appear in the Articles, in order to get shore permits.

RADIO: Coastal Radio Station call sign PKD. Classes: A1 Frequency 430, 550, 8730, A2 Frequency 430, 500, A3 Frequency 8754, 4.

Pilot station Karang Djamuang is also reachable through radio call sign PKW: frequency 500 kHz. This station can also be contacted by VHF Channels 12, 16.

TUGS: For poor steering vessels and those with deep drafts, tugs assistance is indispensable from light buoy No. 5 till light buoy No. 4 is passed.

The tug service is provided by the Port Administration for which the Port Administration has 6 tugs. Two tugs – 1,700 h.p., 2 tugs 1,500 h.p. and 2 tugs – 800 h.p.

Tugs equipped with VHF Channels 12, 14 and 16.

BERTHING: The total length of effective quay in Tanjung Perak Port is 4620 m.

Quay	*Length*	*Depth at LWS*
Jamrud Utara	900 m.	8.6 m.
Jamrud Selatan	800 m.	7.9 m.
Jamrud Barat	210 m.	8.2 m.
Berlian Barat	750 m.	7.3 m.
Berlian Timur	780 m.	8.4 m.
Berlian Utara	140 m.	7.5 m.
Nilam Timur	900 m.	8.2 m.
Perak	140 m.	8.2 m.

Tanker Terminal:

Government Petroleum Pier Depth alongside at LWS is		90 dm.
Semampir East	,,	120 dm.
Semampir West	,,	100 dm.

Coal Wharf: Situated at the Southern end of Tambatan Nilam, equipped with 1 transporter and 2 bunker barges with steam operated grippers, owned by P.N. Tunda Bara.

CRANES: 1 floating crane, capacity 50 tons. 5 electric cranes of 3 tons capacity and 3 electric cranes of 5 tons capacity. 2 mobile cranes of 3 tons capacity. One gantry crane of 5 ton capacity, 2 tractor cranes of 2 tons capacity.

STEVEDORES: Working hours: Monday–Thursday 0700–1200; 1300–1500 hrs. Friday 0700–1100; 1300–1500 hrs. Saturday 0700–1200 hrs. Overtime: Monday–Friday 1500–1700 hrs. Sundays,

holidays 0700–1200; 1300–1500 hrs. Night work allowed after permission from the Port Authority.
Average for bulk cargo 20 t.p.h. per gang
Average for bagged cargo 27 t.p.h. per gang
Average for general cargo 20 t.p.h. per gang
Average for machinery/iron 8 t.p.h. per gang
MEDICAL: Hospital and Port Health Centre.
FRESH WATER: Supply is handled by the Harbour Board to the berths and by 3 water barges. Present capacity about 875 tons per day for the whole harbour. Priority is for Passengers vessels and application required 48 hours prior to ship's arrival.
FUEL: Fuel can be obtained via pipe-lines to all berths.
REPAIRS: Dry-docking and all sorts of repairs are carried out by the State-owned P.N. Dock. There are floating docks, capable of lifting 15,500, 3,500 and 4,000 tons. There are several slipways for coasters.

Electronic Repair Shop: All sorts of electronic repairs such as radar, echo-sounder, etc., can be repaired by private contractors.
CONSULS: U.S.A., U.S.S.R., Japan, Great Britain, Belgium, Australia, India, Pakistan, Philippines, France and Netherlands.
PORT SECURITY: Maintained by members of the Indonesian Armed Services, usually, Police, Navy or Marine and Army. Crew members should be in possession of a shore pass issued by the Port Authority, accompanied by an identification card when leaving or entering the guarded gates of the Port Area. Shore passes can be obtained via the Agencies.
CUSTOMS: It is strictly prohibited to take undeclared foreign currency ashore. Crew members are not allowed to take more than Rp.50.– (fifty Rupiahs only) ashore. It is recommended that Masters consult the Agents about local prevailing Customs Regulations with regard to currency, cigarettes, spirits, etc., to prevent unnecessary difficulties and eventually fines.
AUTHORITY: Port Administration.

TANDJUNG UBAN: 01.03 N. 104.13 E.

P.T. Stanvac Indonesia Oil Terminal.
DOCUMENTS:
11 Crew Lists.
Harbour Report (form to be supplied by the Agent).
Maritime Declaration.
Vaccination List.
2 Stores Lists.
2 Bonded Stores Lists.
2 Personal Effects Lists.
PILOTAGE: Agent requests Pilot upon arrival of vessel, 72 hours advance notice of ETA required. Pilot boards vessel in harbour area.
ANCHORAGES: 0.5–0.75 miles opposite oil jetties.
MAX SIZE:

	Dock No. 2	No. 4	No. 5
Length	800 ft.	650 ft.	650 ft.
Breadth	any	any	any
Draft	34 ft.	33 ft.	32 ft.

HEALTH: Health Officer will board vessel after berthing. No pratique granted, even for vessel after calling at another port in same country.
RADIO: Tandjung Uban Radio – call sign PKJ.
TUGS: No tugs available.
BERTHING: Agent arranges berthing vessel. Dimension of oil hoses used: 6 in. and 8 in. Very limited slop facilities, depending on available ullage.
MEDICAL: Very limited facilities. Only a clinic with experienced wound dresser available. Valid smallpox and cholera certificates for crew members required.
DENSITY: 10254.
FRESH WATER: Available ex-pipe-line – 5 t.p.h.
FUEL: Medium fuel oil, viscosity Redwood 1, 600–900 seconds; heavy fuel oil, viscosity SSF, 30–40. Prior approval from PT Stanvac Indonesia, Jakarta, required for obtaining bunker fuels.
GANGWAY/DECK WATCHMEN: Port authority provides 1 safety guard during vessel's stay in port.
CUSTOMS ALLOWANCES: Reasonable quantity allowed to be used during vessel's stay in port.
IDENTIFICATION CARDS: Possession of a valid Seaman's Book sufficient.
REPATRIATION: No facilities available.
AIRPORT: Distance to airport, 60 miles. Served by Garuda Indonesian Airline 3 times a week (Mondays, Thursdays and Saturdays) to Jakarta only.
TIME: GMT plus 7 hours.
POLICE/AMBULANCE/FIRE: Police, tel. 55; Clinic, 37 and 58; Fire, 44 and 13.
TELEPHONES: Agents place telephone on board at no cost.
AUTHORITY: Penguasa Pelabuhan (Port Authority).

TARAKAN: 03.20 N. 117.45 E.

DOCUMENTS: See "Djakarta".
PILOTAGE: Compulsory pilotage consisting of sea and harbour pilots. Ships requiring pilot service should notify the Harbour Master at least 24 hours before arriving at outer buoy. Tide: semi diurnal.

Pilots do not normally work at night. The approach buoys and leading lights are frequently extinguished and vessels arriving at night are recommended to anchor at No. 1. Buoy and await a Pilot in daylight.
HEALTH: Vessels arriving from abroad direct in one of the 2nd Class Ports have to apply well in advance to the Department of Health (Quarantine Section) for a provisional free pratique, as said pratique has to be cabled to the port concerned. The provisional free pratique is only valid for the port concerned, the next port of call must be a First Class Port as no further provisional free pratique will be issued, unless the vessel sails directly abroad from the 2nd Class Port concerned.
RADIO: Call sign: PKO Class A1. This station also has VHF Maritime Bands working on the same hours as the Short Wave Transmissions.
TUGS: Nil.
BERTHING: The anchorage will hold many ships but very little cargo is worked from the anchorage as most vessels calling are timber ships waiting to load. The very occasional ocean cargo ship usually unloads on to a barge but very occasionally goes alongside the Commercial Jetty.

The Commercial Jetty has a least depth of 4 m. and a length of about 150 m. There is a crane capable of lifting 2 tons on the inside berth. This jetty is very old and delapidated and normally handles only small craft of local inter-island character.
STEVEDORES: Working hours: 7 hours on normal working days. Overtime can be arranged.
TANKERS: The Pertamina jetty has a least depth of 8 m. and is about 180 m. in length. This pier is solely for the export of petroleum products in small tankers.

Off the Pertamina pier is a 6-buoy sea berth to which tankers of 35,000 tons d.w.t. are secured to load oil for export. The loading rate is about 1,000 t.p.h., through two 10 in. hoses. The berth requires a tanker with a derrick capable of lifting 3 tons.
GENERAL: Port doctor available.

Carrying a camera ashore or even on deck of a ship for photography is strictly prohibited.

There is a small hospital. No stores, water, or fuel oil are available. There are no repair facilities at all. Pertamina operates a small hospital and a clinic. There is air communication to other parts of Indonesia through Balikpapan.
PORT SECURITY: Maintained by members of the Indonesian Armed Services, usually, Police, Navy or Marine and Army. Crew members should be in possession of a shore pass issued by the Port Authority, accompanied by an identification card when leaving or entering the guarded gates of the Port Area. Shore passes can be obtained via the Agencies.

TEGAL, Java: 06.55 S. 109.10 E.

DOCUMENTS: Upon arrival, vessels have to produce the following Certificates and Documents, which will remain in the Harbour Master's custody until cleared:
Nationality (Registry) Certificates.
Seaworthiness Certificate.
Tonnage Certificate.
Deratisation (Exemption) Certificate.
International Loadline.
Safety Equipment Certificate.
Safety Constructions Certificate.
Safety Radio-telegraphy Certificate.
Vaccination List.
5 Crew Lists.
2 Stores Lists.
2 Crew Baggage's Declaration.
Last Port Clearance.
Health Book.
Custom Clearance and Custom Documents.
Cargo Manifest and Bills of Lading.

When vessels arrive direct from foreign port, Customs and Harbour Police officials board for search.
PILOTAGE: None.
ANCHORAGES: Tegal roads. Safe anchorages: Lat. 06° 49′ 00″ S. Long. 109° 08′ 07″ E. Lighthouse 210°. Distance 2.5 miles off.
RESTRICTIONS: No restriction night entry, but work is done next day (after 0800 hrs.).
MAX. SIZE: Length and breadth no restriction. If draft above 25 ft. will be 2.5 or 3 miles off shore (anchorage on roads).
HEALTH: Maritime Declaration of Health needed from Master, if vessels coming direct from abroad. If vessel comes from other Indonesian ports, automatic free pratique.
RADIO:
I. Fixed Station:
Call sign 8AC on freq. 5315 kc/s. at 0100–0130 GMT
0230–0300
freq. 5165 kc/s. at 0430–0500 GMT
1000–1015
II. Coast Station:
Call sign PKD 21 on freq. 2182/2690 kc/s. at 0030–0100 GMT
0400–0430
Channel 16 – VHF 156.80 mc/s. 0100–0500 GMT
III. Open every day except on holidays.
TUGS: Only used for towing lighters to vessels on the roads.
BERTHING: None. Anchorage only.
STEVEDORES: Ordered by Agent. If possible before arrival of

vessel, some information mainly concerned with requirements of the Shipmaster advises Agents to arrange gangs and available space for Tegal cargo.
MEDICAL: Normally medical attention for crew to be arranged by Agent at order of Master.
FRESH WATER: Nil.
FUEL: Nil.
GANGWAY/DECK WATCHMEN: Services of watchmen if necessary to be ordered by Master.
OPENING/CLOSING HATCHES: Is carried out by crew – sometimes by stevedores.
CUSTOMS ALLOWANCES: Tobacco, wine and/or spirits not allowed to be taken ashore.
IDENTIFICATION CARDS: Necessary.
CONSULS: None available locally.
REPAIRS: None.
REPATRIATION: Agents arrange necessary repatriation of crew.
TIME: Indonesian Western Time = GMT plus 7 hours.
HOLIDAYS: Only Moslem holidays: Id el Fitr. For 2 days no cargo work can be arranged.
POLICE/AMBULANCE/FIRE: Accident, Police, tel. 10; First Aid for Ambulance (Texin Hospital), tel. 387; Fire Departments (Texin), tel. 17.
TELEPHONES: No facilities for placing telephones on board.
SHORE LEAVE: Crew members allowed ashore from 0800 up to 2100 hrs. every day. Not allowed to spend night on shore.
REGULATIONS: Crew members not allowed to bring cameras, foreign money, on shore leave.
AUTHORITY: Sjahbander, Djl.

TELUK BAYUR (Padang): 00.58 S. 100.20 E.

DOCUMENTS: Upon arrival vessels have to produce the following Certificates and Documents, which will remain in the Harbour Master's custody until cleared:

Nationality (Registry) Certificate.
Measurement (Tonnage) Certificate.
Deratisation (Exemption) Certificate.
International Load Line Certificate.
Safety Certificate (passenger ships).
Safety Equipment Certificate (cargo ships).
Safety Radio and Radiotelephony Certificate (cargo ships).
Certificate of Approval (ship's radio station).
Health Book or Bill of Health.
Last Port Clearance.
Subscription of Light and Harbour Dues and Wharfage if any.
Crew Lists and Passenger's Lists.
Ships' Articles.
Other Certificates and Documents as required.

Immigration: Vessels arriving from abroad with passengers must hoist the 'N' flag. Masters have to supply the boarding Immigration Officer with Passenger's List of: (a) disembarking (b) transhipping (c) through passengers.

No persons are allowed on board until the vessel has been examined and the 'N' flag taken down. Passengers must be in possession of a valid visa: visitor's, entry or a transit visa. Those not having a visa may at the discretion of the Immigration Officer, obtain a landing permit. Members of the crew including the Master must appear in the Articles, in order to get shore permits.
PILOTAGE: Compulsory harbour pilotage. Ships have to wait for Pilot inside the roads limits, anchoring as near the breakwater as possible. Pilot is available each day from 0600–1800 hrs. ETA required 6 hours before arrival. ETD required 3 hours before departure.
HEALTH: Vessels arriving from abroad direct have to apply well in advance to the Department of Health (Quarantine Section) for a provisional free pratique, as said pratique has to be cabled to the port. The provisional free pratique is only valid for the port and the next port of call must be a First Class Port as no further provisional free pratique will be issued, unless the vessel sails directly abroad.
RADIO: Coastal station: Call sign PKP2. *Type of equipment:* Transmitter, JRC 250 watt, Transmitter, JRC 125 watt, Receiver, JRC –.

Frequency: 500 kc/s. 0000–0100 hrs., 0400–0500 hrs., 0800–0900 hrs. Frequency: 6355 kc/s. 0130–0200 hrs., 0530–0600 hrs.
TUGS: 1 Tug-boat (SKMP 8) of 250 h.p. is stationed at Teluk Bayur, the use of which is compulsory for incoming and outgoing ocean-going ships. 1 additional tug 180 h.p.
CRANES: 1 electric crane, capacity 6 tons, 2 mobile cranes, capacity 3 and 5 tons.
STEVEDORES: *Working Hours:*
Monday to Thursday: 0800–1200; 1300–1600.
Friday: 0800–1100; 1330–1600.
Saturday: 0800–1200; 1300–1400.
Overtime until 2400 hrs. in normal time, round the clock special permit.
Cargo Handling Speeds:
1. General cargo: 15 to 20 tons per gang/hour.
2. Bulk cargo/cement: 20 to 25 tons per gang/hour.

BERTHING:

Quay/Used by	*Length (m.)*	*Depth Below LWS Actual (m.)*	*(ft.)*	*Remarks*
Pier No. I				
Pilgrim Priority for tourist vessels, ocean-going for export	120	8.0	26.2	In case of Pilgrim tourist and ocean-going vessels are not used, this pier could be used also for passenger (RLS), import and inter-island vessels.
Pier No. II				
Idem	108	8.0	26.2	Idem
Pier No. III				
Inter island	108	7.5	24.6	
Pier No. IV				
Idem	96	7.5	24.6	
Pier No. V				
Own ship's/tug boat and mooring boat	10	7.0	23.0	
Pier No. VII				
Oil tanker	10	7.0	23.0	Oil jetty, special for white oil
Pier No. VIII				
Inter island. Temporary used for oil/asphalt tanker	27	7.0	23.0	Black oil and asphalt

Note: 1. High water Spring 1.65 m. (duration).
2. Maximum length of vessels 165 m. (540 ft.).
3. Gate: 7.1 m. (23.3 ft.).

FRESH WATER: Available at wharf, officially at a rate of 8 cu.m. per hour, unlimited quantity during the wet season (September-April). During the dry season with a maximum of 150 cu.m. and a capacity of 4–6 cu.m. per hour. Water should be boiled or chemically treated before consumption.
FUEL: Very limited (Diesel oil only).
REPAIRS: Dry dock available for ships up to 150 tons. Machine-workshops for minor repairs available.
MEDICAL: Teluk Bayur has harbour clinic for emergency cases. Hospitals at Padang.
AIRPORT: At Tabing, distance 15 km.
AUTHORITY: Department of Sea Communications.

TJILITJAP (CILACAP): 07.41 S. 109.05 E.
(See Plan Book)

(a) TJILITJAP PORT.
(b) CILACAP – IRON SAND PORT.

(a) TJILITJAP PORT.
DOCUMENTS: Upon arrival vessels have to produce the following Certificates and Documents, which will remain in the Harbour Master's custody until cleared:
Nationality (Registry) Certificate.
Seaworthiness Certificate.
Measurement (Tonnage) Certificate.
Deratisation (Exemption) Certificate.
International Load Line Certificate.
Safety Certificate (passenger ships).
Safety Equipment Certificate (cargo ships).
Safety Radio and Radiotelephony Certificate (cargo ships).
Certificate of Approval (ship's radio station).
Health Book or Bill of Health.
Last Port Clearance.
Subscription of Light and Harbour Dues and wharfage if any.
Crew Lists and Passenger's Lists.
Ship's Articles.
Other certificates and documents as required.
Ship's Stores List.
RESTRICTIONS: Least depths at the bar and in the channel are 70 dm at LWS.

Current: semi-diurnal. By the influence of the Donan River, especially during the rainy season, the duration of the outgoing current is longer than that of the ingoing. In the rainy season the outgoing current can reach 5 knots.
PILOTAGE: Compulsory. The Pilot station is in Tjilitjap. Outbound vessels, application for Pilots must be made 2 hours before departure, provided that ships sailing before 0800 hrs., must apply before 1800 hrs. of the preceding day. Ships arriving by night must hoist the pilot signals at daybreak. Pilot signals as in the International Code of Signals until the Pilot boards the vessel or till a central signal is made at the signal yard of the Coastal Light "Gunung Tjimiring", where Tjilitjap will be phoned about approaching ships. The Lighthouse-keeper can make the following contra signals:
(a) The Indonesian Flag at the signal yard meaning the Pilot is coming out.
(b) 1 black ball over 2 black cones pointing upwards meaning wait for the next message.
(c) Double cones meaning no Pilot available permission granted to enter without.
(d) Black ball over a black cone pointing upwards meaning Pilot is not coming out, permission to enter without Pilot until you meet one.
Pilotage by night is not available except in very extraordinary cases.

It takes the Pilot 1 hour from Tjilitjap to sea. If a ship can't enter on the same day 2 black cones pointing upwards will be shown with a black ball in between.

HEALTH: Vessels arriving from aboard direct have to apply well in advance to the Department of Health (Quarantine Section) for a provisional free pratique, as said pratique has to be cabled to the port concerned. The provisional free pratique is only valid for the port concerned, the next port of call must be a First Class Port as no further provisional free pratique will be issued, unless the vessel sails directly abroad.

TUGS: Not available.

VHF: Pilot on Channels 16 and 20.

BERTHING: Outer roads while waiting for the Pilot during the West monsoon a safe anchorage in 12 m. water. During the S.E. monsoon not a safe anchorage.' Inner roads, under all circumstances a safe anchorage in 9 m. water in the vicinity of Nusa Kambangan opposite the quays for small crafts and East of Tg. Sodong. Vessels over 80 m. length have to moor due to limited swinging space, current and winds.

Berth length:

Berth I 120.0 m. depth alongside 70 dm at LWS.
Berth II 146.0 m. depth alongside 70 dm at LWS.
Berth III 142.5 m. depth alongside 70 dm at LWS.
Berth IV 130.0 m. depth alongside 70 dm at LWS.

TANKERS: Shell Tanker Terminal: Petroleum jetty with dolphins where tankers of 85 m. length can berth.

STEVEDORES: Working hours Monday–Thursday 0730–1200 hrs. and 1300–1530 hrs. and Saturday. Overtime Friday 0730–1130 hrs. and 1300–1530 hrs.; Sunday–holidays 0730–1200 hrs. and 1300–1530 hrs.; Night shift 1700–2300 hrs. Gang's capacity: Loading manganese ore average 15 t.p.h.; loading scrap iron average 6 t.p.h.; loading copra cake average 10 t.p.h.

FRESH WATER: Water is supplied through pipe-lines to the wharves, capacity 7 t.p.h.

FUEL: Not available.

PORT SECURITY: Maintained by members of the Indonesian Armed Services, usually, Police, Navy or Marine and Army. Crew members should be in possession of a shore pass issued by the Port Authority, accompanied by an identification card when leaving or entering the guarded gates of the Port Area. Shore passes can be obtained via the Agencies.

CUSTOMS: It is strictly prohibited to take undeclared foreign currency ashore. Crew members are not allowed to take more than Rp.50.–(fifty Rupiahs only) ashore. It is recommended that Masters consult the Agents about the local prevailing Customs Regulations with regard to currency, cigarettes, spirits, etc., to prevent unnecessary difficulties and eventually fines.

Ship's Inspection Team: Consisting of members of the Port Authority. This team will search the vessel, after the ship is cleared by the Port Medical Officer. Prior to mentioned search no Cargo handling is allowed. This Team will search the Store Rooms and Cargo hatches, and subsequently seals the Bonded Stores and Radio Transmitter. Careful attention should be given in making up the Store Lists, as any difference found in the items declared and discovered during the search may lead to difficulties.

SHORE LEAVE: Leaving and entering the Custom's Area the crew is checked on the basis of the Crew's List and Identification cards and searched.

(*b*) CILACAP – IRON SAND PORT.

LOCATION: Iron Sand Jetty (loading installation) is situated at the Port of Cilacap, South coast of Central Java, in position: 07° 45′ 03″ S., 109° 00′ 51″ E.

FLAGS: To be flown by incoming vessels: Vessel's National Flag; Indonesian Flag; Vessel's Number; Quarantine & Immigration Flag.

DOCUMENTS: To be produced upon vessel's arrival:

15 Crew Lists
10 Passenger Lists
5 Parcel Lists
8 Stores Lists
8 Cargo Manifests
3 Narcotic Lists
5 General Information (if any)
5 Personal Effects Lists
5 Vaccination Lists
Last Port Clearance
10 Firearms & Ammunition Certificates
10 Harbour Reports
5 Crew's Radio & Camera Lists
International Loadline Certificate
Maritime Declaration of Health Certificate
Safety Radio Certificate
Health Book or Bill of Health
Derating Certificate
Safety Equipment Certificate
Certificate of Registry and Tonnage
Certificate of Vessel's Nationality.

Inspection Team: This team consists of the Port Health Officer, Custom Officer, Harbour Master, Immigration Officer and Police.

After the vessel is granted free pratique, the Immigration Officer will check passports, seamen's book and crew list and issue shore passes.

PILOTAGE: Pilotage is compulsory. Two Government Pilots are available.

There is one pilot station in position 07° 44′ 08″ S., 108° 59′ 34″ E. If vessel wishes to be piloted to Iron Sand jetty on day of arrival vessel must arrive at the pilot station before 1500 hrs. local time at the latest provided the Pilot is available (information of which will be confirmed by Sub-Agent).

RESTRICTIONS: Vessels served on first come, first served basis. Vessels berth between 0600 hrs. and 1500 hrs. and leave during daylight hours on high water. The depths at LWS are: Alongside wharf, 13.0 m.; Channel Bar 11.30 m.

Vessel's Conditions: The height of vessel from water line to top of hatchcoaming or railing must not exceed 15 m. Each side deck breadth from bulwark to hatchcoaming must be preferably 7 m. minimum and 9 m. maximum.

MAX. SIZE: LOA 186 m. max. draft 10.40 m. Deeper possible but it depends on depth at the time of passing bar and after consultation with the Harbour Master.

RADIO: Messages to Pasirbesi Cilacap can be sent through Cilacap Coastal Radio Station, call sign PKR 3.

Arrival Notice – Information required:

Owners advice: Owner to advise by cable to Anekatambang Jakarta and Pasirbesi Cilacap at least 10 working days before vessel's expected arrival at the loading port.

Master's advice: At least 48 hours before vessel's arrival at Cilacap Pilot Station, the ship's Master shall give the following information to Anekatambang Jakarta and Pasirbesi Cilacap: Last port of call, draft on arrival, quantity of iron sand to be loaded, stowage plan (hatch division for iron sand cargo) and other necessary messages.

Final amended arrival time must be sent at the latest 24 hours before arrival.

Previous experience showed that one cannot rely on telegrams regarding ETA sent by Agents at last port of call arriving in due time, therefore Pasirbesi Cilacap waits for the Master's telegram in order to make necessary preparation such as ordering Pilot etc.

Ship's radio transmitter is not to be used while lying in port.

TUGS: Available.

BERTHING:

Mooring: Vessels are moored alongside 1 jetty and 6 dolphins with 4 bollards with good nylon ropes, 4 fore, 4 aft, 1 fore breastline and 1 after breastline. Distance between the two extreme dolphins is 160 m.

Loading Facilities: Loading installation consists of one boom (stacker), iron sand is loaded into the hold of the vessel by means of conveyor belt. Boom can be hoisted vertically from 00° to 60° but the maximum position for proper operation is only up to 15° inclination angle and can swing 26.85 m. (60°) to each side. The length of boom is 33.33 m. The maximum outreach is about 16.33 m. from jetty to seaward.

Loading capacity: About 400–500 t.p.h., however, it depends on the type of vessel, cargo space and size of hatches available.

Weighing: The iron sand is automatically weighed during loading by means of weightometer. The specific gravity of iron sand is around 2.60.

Unloading: Cargo for Aneka Tambang only.

Labourers: Labourers will be supplied by shipper. Making the vessel ready for loading to be done by vessel's Crew members.

STEVEDORES: Loading is performed by shipper's personnel. Loading equipment to be furnished by the vessel.

Working hours: Loading to be effected on weather working days of 24 consecutive hours, Sundays and Holidays included (WWD SHINC), but the following National Holidays are excepted:

New Year (January 1st); Independence Day (August 17th); Christmas Day (December 25th). Lebaran, Maulid Day and Idul Adha determined by Moslem calendar and differ from year to year by international calendar, For definite dates consult Port Administrator.

CUSTOMS: Vessel's bonded store will be sealed by Custom Officer on arrival and will remain sealed until the vessel leaves Cilacap Port.

Note: It is recommended that ship's Master consult the Agents about the local prevailing Customs regulations with regard to currency, cigarettes, spirits, narcotics, etc. to prevent unnecessary difficulties and eventually fines.

MEDICAL: Doctor, hospital and inoculation service available.

FRESH WATER: Not available.

FUEL: Not available.

TIME: GMT plus 7 hours.

REPATRIATION: Can be arranged. Repatriant to be guarded by Immigration Officer from Cilacap to Jakarta until his departure from Jakarta to the destined country.

CONSULS: None.

SHORE LEAVE:

General: Crew members are permitted only to go to Cilacap. Shore pass must be carried by crew during shore visit.

Going beyond Cilacap is prohibited without special landing permit, which can be issued by the local Immigration Officer through Agents.

Visitors: Crew members are not allowed to invite friends, hawkers from shore aboard the vessel. It is also prohibited to lower lifeboats or rafts for purpose of fishing, sailing, visits to nearby islands, etc.

At Anchorage: While lying at anchor awaiting berth, no one is allowed to go ashore until vessel cleared.

Shore leave hours: From 0600 hrs. to 2300 hrs. local time.

GENERAL:

Cash advance: Cash advance in Rupiah can be supplied by Agents at Master's request.

Fumigation: No facilities.

Nature of bottom: Sand and hard materials.

Currents: Direction: at high tide, from East to West; at ebb tide, from West to East. Velocity: around 3-5 knots.

Chart: Indonesian Sea Chart No. 108.

Ship Chandlers: None.

M.P.S. Tax: So called M.P.S. Tax has to be paid in advance to the Indonesian Tax Office at Jakarta, through P.T. Aneka Tambang, Jakarta at the same time as the remittance of advance payment as stipulated in paragraph below. The amount of M.P.S. Tax (about 2% of concerned freight earned) will be advised by P.T. Aneka Tambang, Jakarta to the Principal, if possible a few days before Principal remits advance payment in paragraph below. The final calculation of the tax will be made later.

Disbursement:

Advance Payment: At least 14 days before vessel's arrival at Cilacap vessel's Principal has to remit US$2,000 to the account of P.T. Aneka Tambang Jakarta, at Bank Dagang Negara, Gambir Branch Jakarta, as advance payment of the related ship's disbursement and inform P.T. Aneka Tambang, Jakarta as well as Pasir Besi Cilacap about the remittance accordingly.

Vessel's Disbursement Accounts: All vessel's expenses will be charged to the related Principals through the Vessel's Disbursement Account Statement.

AGENCY:

General Agents: P.T. Aneka Tambang, Head Office: Jalan Bungur Besar 24–26, P.O. Box 2513, Jakarta, Indonesia. Cable Address: Aneka Tambang Jakarta; Telex: Antam J 46323 Jakarta; Telephone: 360011 – 360019 – 260027 – 360035.

Sub-Agents: P.T. Aneka Tambang Unit, Pertambangan Pasir Besi, Cilacap. Jalan Pandanarang, Cilacap Central Java. Cable Address: Pasirbesi Cilacap; Phone: 339 – 142.

TJIREBON: 06.41 S. 108.33 E.

DOCUMENTS:

Crew List.
Passenger List.
Customs Documents.
Manifest.
Bills of Lading.
Ship's Papers/Certificates.
Health Documents.

PILOTAGE: Not compulsory. Applications made through Agent or to Port Administrator via coast station Tjirebon radio.

ANCHORAGE: Boundaries of port area are coast line, meridian 108° 35′ 30″ E. and the parallels of 06° 42′ 15″ S. and 06° 43′ 40″ S.

A light buoy on the position of 06° 42′ 10″ S. and 108° 36′ 20″ E. is placed on the guidance line to the entrance of the harbour.

RESTRICTIONS: Tjirebon roads only accessible for ships of 8 m. max. draft, by taking the Tandkung Sanggarong light buoy at port hand. Only ships with 4 m. max. draft can enter Inner Harbour and moor alongside wharves.

All other ships anchor at outer roads. The harbour is open for 24 hours. For vessels entering the harbour, a signal is given from signal station.

HEALTH: Usual international procedures.

TUGS: Tug services available. Order through Agents.

RADIO: Call sign PKZ2. Working freq. 6491.5 kc/s. and 8799.5 kc/s., watching freq. 6265–6285 kc/s. and 8204–8249 kc/s. Working time 0030–0130 hrs. and 0600–0700 hrs. GMT.

STEVEDORES: Arranged by Agent.

MEDICAL: Normal hospital facilities available. Agent will arrange for medical attention. Advance notice required.

TANKERS: Berthing for only 300 d.w.t. tankers at special oil jetty.

DENSITY: 1025.

FRESH WATER: Delivered by water lighter. One delivery 75 tons, discharged within 6 hours. For quick delivery 2 days advance notice to Agents required.

FUEL: None available.

DEVELOPMENTS: Surveys being made for extension and development of port with 10 m. deep basins, container facilities and a 10 m. deep channel for accommodation of 10,000 d.w.t. ships and future shipping.

GANGWAY/DECK WATCHMEN: Recommended. Arrange with Agent.

OPENING/CLOSING HATCHES: Usually done by stevedores. Appreciated if done by crew.

CERTIFICATES: Port clearance last port of call. Certificates as required by vessel's country of registry and by SOLAS 1960.

CUSTOMS ALLOWANCES: 200 cigarettes per person. Wine/spirits: 1 bottle per person. Bottle opened.

IDENTIFICATION CARDS: Preferably passports, seamens ID cards (issued by maritime authorities; vessel's country).

CONSULS: At Djakarta, 280 km. from Tjirebon.

REPAIRS: Light repairs only by local dockyard.

DRY DOCK: Graving dock of 600 d.w.t. capacity.

REPATRIATION: Can be arranged by Agents.

AIRPORT: Kemajoran International Airport 257 km. from Tjirebon. Domestic Airport 40 km. from Tjirebon.

TIME: Local time (Western Indonesia Time) is GMT plus 8 hours.

HOLIDAYS: New Year (1st January); Ascension of Christ (15th May); Santa Maria (15th August); Independence Day (17th August); Maulud, Mir'adj and Idul Fitri determined by Moslem calendar and differ from year to year by International calendar. For definite dates consult Port Administrator. Cargo work on Idul Fitri (2 days) not guaranteed due to labour shortage.

POLICE/AMBULANCE/FIRE: Harbour Police 3897; City Police 4466; Ambulance 118; Fire brigade 113.

SHORE LEAVE: Allowed after satisfactory fulfilment of immigration requirements and in possession of crew's Harbour Card.

DELAYS: Bad weather (mostly rain).

AUTHORITY: Port Administrator.

NOTES

Please also advise Shipping Guides Ltd.

Iran

ABADAN: 30.20 N. 48.16 E.

Port of Abadan situated on right bank of the Arvandrud, about 47 miles up river from Rooka Buoy.

OPERATORS: National Iranian Oil Company, Abadan Refinery.

DOCUMENTS/PILOTAGE: See "Khorramshahr".

ANCHORAGES: On arrival of pilot boat vessel can anchor with no depth restriction. On entering the Arvandrud the following are the recognized anchorages: Kasba Anchorage position about 2 miles above Fao with a max. depth of 35 ft. in fresh water. Bawarda Anchorage position about 2 miles above Abadan with a max. depth of 31 ft. in fresh water. Vessels which are too deep to pass out of the river on one tide will be required to anchor at Kasba.

RESTRICTIONS: The Port is open for day and night navigation with arrival and sailing being controlled by the tide. Vessels normally enter the Bar at 4 hours before high water at the Bar or at 2 hours after high water at the Bar. Those entering 4 hours before, arrive at Bawarda anchorage generally during flood tide, so must anchor for 6 hours awaiting ebb. Those entering 2 hours after high water, arrive Bawarda during ebb tide and berth on arrival, providing berth available, weather conditions permit and outward movements do not delay. Vessels always berth starboard side to stem the ebb tide and without using tugs and leaving Abadan 4 to 6 hours before high water at Bar.

MAX. SIZE: Max. draft at jetties 31 ft. fresh. Max. length 600 ft.

HEALTH: Inward clearance is affected on board after receiving free pratique. Also see "Khorramshahr" – "Documents".

RADIO: The National Iranian Oil Company Coastal Radio Station call sign EQZ. The station listens for various calls on the normal International Marine Calling frequencies. When close to may be contacted on 500 kHz transferring to 428 kHz for exchange of traffic. Traffic list sent at 5 minutes past odd hours.

TUGS: Not available.

BERTHING: While no changes have actually occurred in the production capacity of the Abadan Refinery, the number of jetties on the Abadan riverside have been reduced to eight. Nos. 3, 4, 7, 9, 11, 16, 22 and 26 have been maintained and are used for bunkering purposes and dry cargo operations.

Ships pass day and night so it is necessary that mooring lines be kept taut at all times to prevent surging on the jetties thereby breaking lines and causing damage to Company property.

Bunkering jetties for those vessels coming only for purpose of taking bunkers are:

Jetty No. 3	Draft alongside	31 ft.
Jetty No. 9	,, ,,	28 ft.
Jetty No. 22	,, ,,	25 ft.
Jetty No. 16	,, ,,	25 ft.

Bunkering jetties for those vessels bringing Oil Company's cargo are:

Jetty No. 7A	Draft alongside between 28 ft.-31 ft.
Jetty No. 7B	
Jetty No. 7C	

MEDICAL: Emergency cases: an ambulance will be dispatched on demand by calling telephone number 5555.

In ordinary cases of sickness or dental treatment: Agents will arrange transportation of patients, and advise Masters regarding necessary medical attention forms. If patient does not speak English he should be accompanied by an interpreter. Only in exceptional cases will a medical officer visit a patient on board.

TANKERS: Deliveries of the refined oil products of Abadan Refinery are effected to ocean-going tankers at Bandar Mahshahr since the inauguration of the products terminal of the National Iranian Oil Company at that port, therefore such shipments are not taking place from Abadan any more.

DENSITY: Fresh water.

FRESH WATER: Available at all jetties.

FUEL: Ships' bunkers are available; however not all types are available at all jetties, therefore, ship's Master should advise by radio the exact quantity and kind of bunkers required. Bunkers are delivered concurrent with loading unless otherwise requested by Master. Due to heavy bunkering commitments it is mandatory that vessels take their bunkers when convenient for the terminal, any delay incurred by a vessel taking bunkers after loading is the responsibility of the Master.

DEVELOPMENTS: A new berth "7D" under construction adjacent to berths A, B and C.

GENERAL: All other items, see "Khorramshahr."

AUTHORITY: National Iranian Oil Co. Abadan Refinery.

AGENT: See "Khorramshahr."

BANDAR ABBAS: 27.15 N. 56.19 E.

DOCUMENTS:

Quarantine Officer
Crew List (1 copy, also all crew vaccination cards for inspection).
Customs Officer
Crew List (2 copies).
Stores List (2 copies).
Port Authority
Crew List (1 copy).
Agents
Crew List (2 copies).

In order to avoid any delay in entering and discharging, the following documents must be sent by all loading port Agents to Bandar Abbas. Agents as far in advance of vessel's arrival as possible:

Cargo Manifest (6 copies).
Freight Manifest (2 copies).
B/L Copies (2 copies each).

All cargo shown on Manifest must be landed at the port, and it is therefore essential that short-shipments, cancellations, diversions, etc. (if any) be reported as early as possible and manifest should be corrected before submission to Port Authorities to avoid payment of fines. Stowage plans and hatch lists should also be sent ahead, giving ample time to be studied by Cargo Supervisor for unloading arrangements.

PILOTAGE: Application for Pilot to be made well in advance through Bandar Abbas Port Radio EQI. Agents may also arrange pilotage but should be advised of ETA well in advance.

ANCHORAGE: Approx. position 27° 04′ N. 56° 04′ E. Depth 36 ft. The distance from the outer anchorage at buoy No. 1 to the port entrance is about 2 miles.

RESTRICTIONS: Entry or departure day or night. Depth of water alongside jetty, minimum 34 ft. and depth in channel approx. 32 ft. at LW. Height of tide at HW about 3 m.

Width of entrance channel is about 150 m. at surface, and 100 m. at seabed.

MAX. SIZE: Port can accommodate vessels up to 600 ft. length with a max. draft of 33 ft.

RADIO: Bandar Abbas Port Radio EQI – 500 kc/s.

Port telecommunications working from 0600 hrs. to 2400 hrs every day.

VHF: Channels 13, 16, 18 and 25. HF call-sign EQI available. Also see "Radio".

TUGS: 2 tugs 550 h.p. each, for harbour services, as well as for towage, in case of necessity.

BERTHING: Also see "Developments". Berthing after sunset is not permitted, and if a vessel arrives after sunset berthing will not take place until the following morning. Unberthing after sunset is permitted subject to overtime payments being made to Pilots and tug workers, but this arrangement is not official and is subject to mutual agreements.

Quay is 1,050 m. in length, 35 m. width and capable of accommodating 6 vessels each of 175 m. LOA.

There are 2 closed sheds, each having a capacity of 7,500 tons, 1 closed shed with a capacity of 15,000 tons and 6 open sheds having capacity of 100,000 tons.

Ore handling installation. The ore is loaded by conveyor belt and the average daily loading rate is 1,500 tons per day running from 0630 hrs. to 2200 hrs. daily.

Chrome ore loading is carried out at one hatch at a time only, and therefore the vessel has to be shifted by the crew in order to load the other hatches.

Grain discharged at rate of 700 to 800 tons per day. No silos.

STEVEDORES: Bagged cargo can be discharged at the rate of 800/900 tons per day, working 5 hooks.

Working hours at the New Port are, 0730 to 1200 hrs., 1300 to 1800 hrs., and 1900 to 2300 hrs., making a total of 3 shifts.

CARGO GEAR: All vessels calling at this port must be capable of loading/discharging with their own gear, including rope, canvas and wire slings as necessary and/or wire or rope nets, etc.

Equipment available ashore is as follows: 2 mobile cranes with lifting capacity of 18/20 tons; 2 mobile cranes with lifting capacity of 7 tons each; 2 mobile cranes with lifting capacity of 5 tons each; 3 forklifts with capacity of 3 tons; 7 forklifts with capacity of 2 tons; 2 tractors for towing trailers; 8 small trailers; 4 big trailers.

FREIGHT TAX: Freight tax is payable on any freight earned in Iran for any export cargo loaded at any Iranian port. Per article 90 of Tax Law, freight tax is payable at the rate of 5 per cent of gross freight, regardless of whether freight is collected in Iran or elsewhere. There is no tax on import cargo freight regardless of where the freight is paid. In other words, for cargo discharged in Iranian ports, even if freight is payable at destination to be collected in Iran, there is no tax applicable.

MEDICAL: There is a General Hospital with about 100 beds. A number of physicians and dentists are available. Facilities available for vaccinations and inoculations.

FRESH WATER: Fresh water is available at all berths ex-pipe-line excepting the chrome ore berth which is at a separate jetty. Vessels loading chrome ore must take fresh water (and bunkers) before or after loading as there is no connection at the ore loading berth. Fresh water also available ex-barge at the anchorage. Cost about US $15.00 per ton.

FUEL: Fuel is available at all berths ex-pipe-line excepting the chrome ore berth which is at a separate jetty. Vessels loading chrome ore must take fuel (and fresh water) before or after loading as there is no connection at the ore loading berth.

CUSTOMS: Customs Officer will seal the store-room. All liquor and cigarette stocks will be placed under bond and reasonable ship's requirements should be taken from store before sealing.

IDENTIFICATION CARDS: According to regulations in force seamen should hold shore pass issued by respective Agents and signed by the Port Health, Port Police and local town Police Authorities. All shore passes should bear a photo of the holder, in order to facilitate checking at exit of port area. It is therefore necessary for Officers and crew to have a photo ready on arrival at the port to facilitate obtaining shore passes.

CONSULS: None.

REPAIRS: Minor repairs available at private workshops.

WEATHER: With the exception of about 2 months during the Winter, the air is generally wet and humid, but with little rainfall. Temperature seldom falls below 10 degrees centigrade in Winter, and seldom exceeds 40 degrees centigrade in Summer.

AIRPORT: About 15 km. distance from the port. Jet flights to international destinations on virtually a daily basis.

TIME: GMT plus 3.5 hours.

TELEPHONES: May be placed on board.

SERVICES: Survey, repairs, crew changes at sea or launch service to vessels off the port can be arranged by BASCO Limited. Contact through Agent.

SHORE LEAVE: Provided Security Dept. approves, crew allowed to go ashore by surrendering their seamen's books to port police guard.

DEVELOPMENTS: An additional port area is under construction and is expected to be completed 1978/79. The new facilities will include the following:—

10 Jetties to be used for general cargoes. Length of jetties is to be 1,920 m., and there will be 162,000 sq.m. of covered sheds with an open area of 100,000 sq.m. Vessels of up to 30,000 d.w.t. will be accommodated alongside these jetties.

4 Jetties to be used for special cargoes. Length of jetties to be 720 m. with an open area of 60,000 sq.m. and suitable for vessels of up to 30,000 d.w.t.

4 Jetties for container cargoes. Length of jetties to be 960 m. with warehouses of 12,000 sq.m. and open area of 430,000 sq.m. suitable for vessels of up to 45,000 d.w.t.

1 special Jetty for cereal cargoes. Length of jetty to be 375 m. with a transit silo of 135,000 tons capacity and suitable for vessels of up to 100,000 d.w.t.

5 Jetties to be used for import/export of bulk ore cargoes. Length of jetties to be 1,140 m. with an open area of 220,000 sq.m. and suitable for vessels of up to 60,000 d.w.t.

5 Lash-Terminals with warehouses of 9,000 sq.m. and open area of 50,000 sq.m. suitable for barges of up to 500 d.w.t.

A special Ro-Ro Terminal which will accommodate vessels of up to 45,000 d.w.t.

A Bunkering Jetty, length 300 m. and to accommodate vessels of up to 30,000 d.w.t.

GENERAL: *Hotels.* The Gameron is a modern hotel equipped with air-conditioning and having 120 beds. A wooden swimming pier has been constructed on the sea-beach opposite the hotel for the use of residents. The Welcome Inn, a 3-star motel equipped with air-conditioning is used by seafarers.

There is another modern hotel, the Shah Abbas. Second-class hotels, about 4 in number are also available.

Provisions. There are no ship chandlers at Bandar Abbas, but fresh and canned provisions are available through the ship's Agent.

Transport. Distance between port and the town of Bandar Abbas is about 10 km. and there are private mini-buses and taxis available. Motor-boats are available for attendance upon vessels at anchorage and also at the chrome ore berth which is not approachable by land transport.

Laundry. Subject to time available, can be arranged by ship's Agent.

AUTHORITY: Port Director.

AGENT: Gulf Agency Co. (Iran) Ltd., PO Box 761 Bandar Abbas Iran, Cables: "CONFIDENCE" Bandar Abbas. Telex: Tehran 212507, 212856, 213043 and 213044 (stating for Bandar Abbas). Tel.: 4168, 4169.

BANDAR MAHSHAHR 30.27 N. 49.20 E.

(See Plan Book)

Refined Products Loading Terminal of the National Iranian Oil Company.

Iranian Flag: All vessels required to fly Iranian flag from foremast during daylight hours, while in port.

DOCUMENTS:

8 Crew Lists.
2 Bonded Store Lists.
International Health Form.
If cargo aboard, Manifest certified by Iranian Consulate.
Clearance from Last Port.

GENERAL: Khor Musa is deep tidal inlet at head of Gulf. Consists of triangular-shaped entrance 35 miles wide and 22 miles long followed by a channel, approximately 14 miles long with average width about 800 ft., ending at Port of Bandar Mahshahr. Khor Musa is entered by deep water approach channel 25 miles long and 0.8 miles wide, commencing at Khor Musa light float, located in position 29° 36′ 32″ N. 49° 34′ 47″ E. At end of approaches channel, near buoy No. 12, restricted depths and channel widths extend for distance of 8 miles, in vicinity of Khor Musa Bar. A deep water channel then exists up to commercial port of Bandar Shahpour, and to oil port of Bandar Mahshahr, a total distance of 37 miles from end of Bar Channel. Refined products delivered to Bandar Mahshahr Terminal from National Iranian Oil Company's Refinery at Abadan.

TERRITORIAL WATERS: The 12 mile limit of Iranian territorial waters crosses approaches channel in vicinity of Khor Musa Approaches Buoy No. 8, which is approximately 20 miles from Khor Musa light float.

KHOR MUSA APPROACHES:

Navigational Dangers. Numerous shoals and sand banks in Khor Musa with low-lying shore lines and few conspicuous marks. However, shipping channels well marked with light beacons and buoys and present no navigational difficulties in clear weather. A small unlit tide gauge platform located on edge of shoal West of shipping channel in 29° 42′ 30″ N., 49° 03′ 48″ E., approximately 1.75 miles West of Khor Musa Approaches Buoy No. 4, and shown on Admiralty Chart.

Outer Khor Musa Channel. Approaching vessels should steer for Khor Musa light float, in position 29° 36′ 32″ N., 49° 34′ 47″ E., and from there a course should be set along marked channel for buoy No. 12 in position 29° 56′ 03″ N., 49° 06′ 47″ E., bearing 308° 45′ from Khor Musa light float.

New Khor Musa Channel: Depth of channel is 40 ft. below L.A.T.

Note: Buoys South of and including Buoy No. 12 above are referred to as Khor Musa Approaches Buoys. Buoys North of No. 12 above are referred to as Inner Khor Musa Buoys.

PILOTAGE: Compulsory. Service operated by Bandar Shahpour Port Authorities up to Bandar Shahpour, and by Oil Company between Bandar Shahpour and Bandar Mahshahr. Pilot vessel maintains station approximately 1 mile, 135° from Khor Musa Approaches Buoy No. 12. Vessels requiring Pilot should approach within 2.5 cables of pilot vessel. During adverse weather conditions Pilot may proceed above bar for shelter; in such cases vessels should not attempt to proceed inward without Pilot. Essential that ETA Bandar Shahpour is transmitted to Coastal Radio Station EQZ as soon as possible after Pilot has embarked at Pilot station. If for any reason a vessel is required to wait at any time at Bandar Shahpour, it will be advised through EQZ. Marine Operation Section, Bandar Mahshahr Terminal, on receipt of ETA Bandar Shahpour, will arrange for Berthing Master to board vessel at Bandar Shahpour anchorage and allocate jetty berth at Bandar Mahshahr.

BANDAR MAHSHAHR APPROACHES:

Navigational Dangers. Khor Musa Channel well marked with buoys and beacons, but attention is drawn to following:

(a) Outer Khor Musa Bar. 29° 59′ N., 49° 04′ E. and inner Khor Musa Bar 30° 02′ N., 49° 01′ E., where restricted channel widths and depths exist and min. depth 40 ft. Buoyed channel over bar is 800 ft. wide, but declared min. depth of 40 ft. only applicable to central half of channel. Towards edges of channel, shallower depths exist.

(b) Qassar bin Siswan. A rocky shoal, in 30° 12′ N., 48° 58′ E. approximately 10 miles North of inner Khor Musa Bar, marked by Buoy No. 9 with min. depth 6 ft.

(c) Khor Wastah to Beacon 18. Near sharp bend to East in channel, where tidal streams reach rate of over 4 knots at ebb.

Khor Musa Bar. Reached approximately 5 miles N.W. from pilot vessel, and normally does not restrict passage of inward vessels.

Khor Musa Channel. After leaving bar, channel is followed up Khor Musa for about 32 miles to anchorage at Government Bandar Shahpour.

Bandar Shahpour. All inward bound ships required to anchor on arrival off Bandar Shahpour, where Pilot disembarks and a Government Medical Officer comes on board to grant pratique. For this purpose an accommodation ladder should be rigged and ready before arrival.

Bandar Mahshahr Roadstead. Shortly after leaving Bandar Shahpour, the channel to Bandar Mahshahr is entered between the starboard hand beacon No. 1 (flashing white) and the port hand beacon No. 2 (temporarily removed). Channel well marked by light beacons to entrance of Bandar Mahshahr, at beacon No. 4. All port hand lights flash red and all starboard hand lights flash white. Distance from Bandar Shahpour Anchorage to Bandar Mahshahr about 7 miles. Before arriving at Bandar Mahshahr, the accommodation ladder must be taken in and the ship's side cleared for tugs and berthing.

ANCHORAGE: No anchorages in Bandar Mahshahr or Bandar Mahshahr roadstead. Inward bound vessels must anchor on Northern side of Khor Musa channel, West of Bandar Shahpour, and await arrival of Oil Company Berthing Master.

WIND AND TIDE:

Khor Musa Bar. Classified as Standard Port in Admiralty Tide Tables, Volume II. Tidal predictions considerably affected by strong winds. Variations up to 3 hours in time, and 3.5 ft. in height have been recorded. North-Westerly winds tend to lower level and retard predicted times of high and low waters; South-Easterly winds have opposite effect. At Khor Musa Bar, Mean Higher High Water has rise of 11.6 ft. and Mean Lower High Water has rise of 9.6 ft. above chart datum. Rise of tide at bar is also given by automatic tide indicator established near inner Khor Musa Buoy No. 8. Masters may obtain expected depth of water on Khor Musa Bar at any time by telephone to Marine Operations Office, Mahshahr, 4264.

Khor Musa. Tidal range increases between bar and Mahshahr. Maximum tidal velocities in Khor Musa about 3.5 knots on flood and 4.5 knots on ebb, at bend near inner Khor Musa beacon No. 18.

At ports of Shahpur and Mahshahr. Average time high water is 1 hour 35 minutes later, and low water 16 minutes later than on Bar. Mean Higher High Water has rise of 17.0 ft., and Mean Lower High Water rise of 14.6 ft. above Mahshahr chart datum.

Mahshahr Terminal. N.W. prevailing winds blow across jetties, from shore. On average, 60% of prevailing winds from N.W., 30% from S.E., and 10% variable. N.W. and S.E. winds frequently reach Force 8, but winds from other directions normally do not exceed Force 4. Maximum tidal range 18.9 ft. At springs, flood tide has velocity of 2 knots and ebb tide velocity 3 knots.

MAX. SIZE: Max. LOA 780 ft. Max. permissible draft at Khor Musa Bar is 40 ft. Depths in tanker berths vary from 37 ft. at berth No. 4 up to 43.5 ft. at berth No. 6.

Vessel up to 740 ft. LOA can be berthed day or night at any stage of the tide. Vessels lengths 741 – 780 ft. can only be berthed during daylight hours flood tide and unberthed on flood tide day or night.

HEALTH: Owners should check with Agent respecting any recent imposition of anti-epidemic regulations and requirements for additional injections for Crew members. Medical officer boards at Shahpour Anchorage. Subject no infectious diseases reported on board during voyage, Medical Officer will grant pratique.

RADIO: Oil company has coastal radio station at Abadan, call sign EQZ. Station handles messages to and from oil ports of Mahshahr, Abadan, Kharg Island and Cyrus Terminal.

Nomination and Loading Orders: Signalled by Iranmash on receipt of vessel's first ETA. Vessels should signal tentative ETA Khor Musa Bar, 72 hours in advance, confirming ETA not less than 48 hours before arrival Khor Musa Pilot vessel station.

Radio Watches: Continuous watch on 500 kHz to be maintained at all times while navigating Khor Musa waterway, and ordinary listening watches maintained when at anchor.

VHF: Mahshahr Terminal equipped with International Maritime VHF/FM Radio Telephone Service, using standard international frequencies. Masters recommended use this facility when within range of Mahshahr Terminal. Channels available on continuous watch basis:

No. 16 Safety and Calling.
No. 12 Port use, tankers and tugs.
No. 20 Port use, telephone extension.
No. 26 Port use, telephone extension.

Initial contact should be made on Channel 16 and then transfer to Channel 12 for port operations, or Channel 20 or 26 for telephone extension.

TUGS: 3 tugs at terminal, all of 1,500 b.h.p., all fully equipped for fire fighting. Incoming ships are met by tugs in channel about 1 mile below port limits. 2 tugs always used berthing, and 1 or 2 unberthing, according to state of tide and direction of ship's head. Vessels take tug's ropes.

BERTHING: Vessels arriving on flood tide berthed starboard side to jetty, vessels arriving on ebb tide berth port side to jetty. 6 bulk loading jetties, each fitted with Woodfield loading unit. 10-in. loading arms, 6-in. bunker arms. Minimum number mooring ropes or wires required is 14, as follows: (Forward) – 4 head ropes, 2 breast ropes, 1 back spring. (Aft) – 4 stern ropes, 2 breast ropes, 1 back spring. For additional security 1 extra breast line forward and aft should be used. Unless breasts of adequate strength line are used, there is every possibility of vessel when in light condition being blown off jetty by N.W. wind and damaging loading equipment.

Maximum loading rates are:

Liquid propane/butane	1,500 t.p.h.
Aviation gasolines	700 t.p.h.
White spirits (solvent)	400 t.p.h.
Motor gasolines	2,200 t.p.h.
Motor gasoline (over the rail blending)	400 t.p.h.
Naphtha	2,100 t.p.h.
Turbine fuels	1,600 t.p.h.
Kerosines	1,500 t.p.h.
Gas oils	2,500 t.p.h.
Marine diesels	700 t.p.h.
Fuel oils	5,000 t.p.h.

LPG LOADING: Propane and butane gas is loaded at No. 6 jetty at a rate of 1,500 t.p.h. Propane and butane cannot be loaded simultaneously.

As 16-in. fixed Chicksan liquid and vapour return arms are used for loading, certain ships are limited to one-side berthing only. To avoid delay of vessels, it is advisable to have vapour return connections on both sides of liquid connection on board.

Terminal has available a series of ASA Standard reducers and adapters.

Loading temperature of propane is about minus 48° F., and butane is about minus 23° F.

BALLAST: Tankers may discharge ballast ashore at Jetties No. 1, 2, 5 and 6. Ballast received at rate of 2,000 t.p.h. Slops and residues at rate of 200 t.p.h.

MEDICAL: No medical facilities at terminal. Agents may arrange medical attention through Oil Company clinic in Abadan. In event hospital treatment required, patient would be taken to Abadan.

FRESH WATER: Limited supply potable water available all jetties, but supply very limited during months June to October.

FUEL: Fuel and diesel oil available each jetty. 10-in. loading arms connected to 6-in. flexible hoses. Loading rates, fuel max. 500 t.p.h., diesel max. 400 t.p.h. 48 hours notice required.

FIRE PRECAUTIONS: On arrival Shahpour Anchorage Master is given 6 copies of Fire and Safety Regulations. Fire Station and Emergency tel. 4111.

CUSTOMS ALLOWANCES: Reasonable quantity spirits and tobacco for consumption in port may be issued prior sealing store rooms. Strict supervision imposed by Customs and prohibited items, particularly tobacco and cigarettes, should not be taken ashore in excess of 50 cigarettes, or cigars, or 1 oz. tobacco.

CONSULS: Consulates situated in Khorramshahr.

REPAIRS: No repair facilities at Mahshahr or Shahpour. In emergency, the Oil Company may be able to undertake minor repairs. No main engine repairs whilst alongside loading jetties without permission from Terminal Superintendent.

TIME: GMT plus 3.5 hours.

TELEPHONES: Available at each jetty. If requested, telephone may be placed aboard.

SHORE LEAVE: Restricted to foreshore area only. Recreation centre opposite No. 2 jetty.

CURRENCY: The unit of currency is the Iranian Rial. It is illegal to use any other than Iranian currency ashore and heavy fines have been imposed for infringement of this regulation. Masters are requested to bring this matter to the individual notice of their officers and crew. Currency denominations are:

Notes: 10,000, 5,000, 1,000, 500, 200, 100, 50 rials.
Coins: 20, 10, 5, 2 and 1 rial.

AUTHORITY: National Iranian Oil Co. Bandar Mahshahr.

AGENT: Gulf Agency Co. (Iran) Ltd., Bandar Mahshahr. Cables "Confidence". Iranian Head-office: Gulf Agency Co. (Iran) Ltd., POB 110, Khorramshahr, Iran. Tel. 2278, 2280, 4755 and 4758; Cables "Confidence", Khorramshahr. Telex: 654033, 654000 and 654051. (answer back: "GAC IR").

If it is difficult to reach Khorramshahr with international telex messages, communicate via Tehran office, telex No. 212507, 212856, 213043 and 213044. Tehran, (answer back: "GAC IR"), stating "For Khorramshahr".

Ships' mail and spare parts for vessels calling at Bandar Mahshahr to be routed by flights arriving directly to Abadan Airport without transhipment at Tehran, and addressed to: Gulf Agency Co. (Iran) Ltd., POB 62, Abadan, Iran.

Cables from vessels should be sent via Khorramshahr Port Radio to "Confidence", Khorramshahr, as well as to "Confidence" Bandar Mahshahr.

BANDAR SHAHPOUR: 30.27 N. 49.05 E.

(See Plan Book)

DOCUMENTS:

Quarantine Officer
Crew List (1 copy, also all crew vaccination cards for inspection).
Customs Officer
Crew List (2 copies).
Stores List (2 copies).
Port Authority
Crew List (1 copy).
Agents
Crew List (2 copies).

In order to avoid any delay in entering and discharging, the following documents must be sent by all loading port Agents to Bandar Shahpour Agents as far in advance of vessel's arrival as possible:

Cargo Manifest (6 copies).
Freight Manifest (2 copies).
B/L Copies (2 copies).

All cargo shown on manifest must be landed at the port, and it is therefore essential that short-shipments, cancellations, diversions, etc. (if any) be reported as early possible and manifest should be corrected before submission to Port Authorities to avoid payment of fines. Stowage plans and hatch lists should also be sent ahead, giving ample time to be studied by Cargo Supervisor for unloading arrangements.

The names of consignees must be inserted on the manifest at the port of origin. This is due to the fact that names have not been inserted as per Iranian Customs authorities requirements.

In view of the above, Owners are kindly requested to make sure that manifests for Bandar Shahpour are properly made out at loading port with correct names of consignees.

PILOTAGE: Application for Pilot to be made well in advance through Bandar Shahpour Port Radio – EQN – 500 kc/s. If Agents required to arrange Pilot they should be informed well in advance.

Pilotage operated by Shahpour Authorities up to Shahpour. Pilot vessel approximately 1 mile, 135° from Khor Musa Approaches Buoy No. 12. Approach within 2.5 cables of pilot vessel. During adverse weather pilot vessel may proceed above Bar, in such cases, do not attempt proceed inward without Pilot.

APPROACHES: Shipping channels well marked with lightbeacons and buoys and present no navigational difficulties in clear weather.

Small unlit tide gauge platform located on edge of the shoal West of shipping channel in Lat. 29° 42′ 30″ N., Long. 49° 03′ 48″ E., approximately 1.75 miles West of Khor Musa Approaches Buoy No. 4, and shown on Admiralty Chart.

Approaching vessels should steer for Khor Musa light float, in position Lat. 29° 36′ 32″ N., Long. 49° 34′ 47″ E., and from there a course should be set along marked channel for Buoy No. 12 in position Lat. 29° 56′ 03″ N., Long. 49° 06′ 47″ E., bearing 308° 45′ from Khor Musa light float.

MAX. SIZE: Vessels of 29 ft. draft may enter port at any time. Higher drafts depending on state of tide. Normal rise of tide about 11 ft. Entry permitted day or night.

HEALTH: Medical Officer boards at Shahpour. Subject no infectious diseases reported on board during voyage, Medical Officer will grant pratique.

RADIO: Bandar Shahpour Port Radio EQN 500 kc/s.

Continuous watch on 500 kc/s. is to be maintained at all times while navigating in Khor Musa Waterway.

VHF: Channels 13, 16, 18 and 25. 24 hours service.

TUGS: Normally not required, but available if necessary due to bad weather.

BERTHING: Berth No. 1 – 31 ft. depth alongside.
Berth No. 2 – 29 ft. depth alongside.
Berth No. 3 – 29 ft. depth alongside.
Berth No. 4 – 33 ft. depth alongside.
Berth No. 5 – 34 ft. depth alongside.
Berth No. 6 – 34 ft. depth alongside.
Also see "Developments".

BULK HANDLING FACILITIES: Iron Ore Installation, loading capacity about 2,000 tons per day. The loading installation consists of 2 powerful moving cranes with a capacity of 100 t.p.h. on each unit, 2 funnel-shaped containers with a capacity of 30 tons each and a 600 m. long conveyor belt with a capacity of 175 t.p.h.

Sulphur: The shiploader travels the length of the vessel and has a loading rate of 400 t.p.h.

All derricks to be swung away from the shore giving the loader maximum clearance. Radio aerials, and fore and back stays to be removed.

Due to high temperatures, every precaution must be taken to combat risk of fire.

Grain: All berths are available for grain discharge. Grain is bagged in holds and discharged in slings using ship's gear. At only one berth is discharge possible by vacuvators. All discharges into railway wagons and/or trucks supplied by receivers.

All vessels discharging general cargo or grain should be prepared to handle discharge with own gear.

MEDICAL: 24 hours advance notice of requirements to be sent to Agent.

FRESH WATER: There is water supply on every jetty, and Masters are requested to inform their Agents 24 hours in advance of their requirements, allowing Agents to pay for the water and take turn for supplying water to the vessel.

Fresh water can also be arranged at the inner anchorage by barge, and Agents will need 48 hours advance notice in order to obtain barge. Agents will have the barge loaded with water from jetty and deliver to anchorage.

As there is only 1 barge available, when this is out of commission, Agents cannot provide water at the anchorage, and vessels have to wait until they are docked alongside.

FUEL: Not available. In case of absolute need can be arranged at Bandar Mahshahr but jetty fees extremely high.

HATCHES: Opening and closing by ship's crew.

CUSTOMS ALLOWANCES: Reasonable quantity spirits and tobacco for consumption in port may be issued prior sealing store rooms. Strict supervision imposed by Customs and prohibited items, particularly tobacco and cigarettes, should not be taken ashore in excess of 50 cigarettes, or cigars, or 1 oz. tobacco.

IDENTIFICATION CARDS: According to regulations in force seamen should hold shore pass issued by respective Agents and signed by the Port Health, Port Police and local town Police Authorities. All shore passes should bear a photo of the holder, in order to facilitate checking at exit of port area. It is therefore necessary for officers and crew to have a photo ready on arrival at the port to facilitate obtaining shore passes.

CONSULS: See "Khorramshahr".

REPAIRS: Radio and radar repairs can be arranged from Khorramshahr. At B. Shahpour minor technical and mechanical repairs possible by private workshops. Repair shop and slip of 1,500 tons capacity in process of construction.

AIRPORT: Distant 110 km. Regular flights.

TIME: GMT plus 3.5 hours.

DEVELOPMENTS:

Description	*No. of Berths*	*Wharf Length (m.)*	*Completion Date*
Extension of the 4-berth jetty (Container terminal)	4	771	**
Extension of the 10-berth jetty	5	1,051.5	*
Extension of the 10-berth general cargo jetty	5	911.2	*
Construction of the 14-berth jetty	14	2,552	1979
Construction of the Lighter harbour	20	880	Completed
Construction of the grain terminal	2	480	,,
Construction of the ore-loading facilities	1	220	,,

*Completed June 1978
**Completed December 1977 depth alongside 12.5 m.

SHIPMASTER'S REPORT:

Congestion; In the event of the port being congested vessels anchor initially in the vicinity of No. 12 buoy. Masters should then cable "Harbourmaster Bandar Shahpour" to register the vessels turn giving: Date and time of anchoring; Gross and Net tonnage; length and draft. Pilot vessel "Assadeh" keeps watch on 2182 k/cs and occasional watch on VHF Channels 16 and 13, Call sign "Khormusa Pilots". Vessels subsequently anchor in river to seaward of Bandar Shahpour jetties to await turn.

No water or stores can be obtained at outer anchorage.

At inner anchorage water and stores can be obtained by launch but with some difficulty.

AUTHORITY: Port Director.

AGENT: See "Khorramshahr".

BUSHIRE: 29.00 N. 50.45 E. (See Plan Book)

DOCUMENTS:

Quarantine Officer
Crew List (1 copy, also all crew vaccination cards for inspection).
Customs Officer
Crew List (2 copies).
Stores List (2 copies).
Port Authority
Crew List (1 copy).
Agents
Crew List (2 copies).

In order to avoid any delay in entering and discharging, the following documents must be sent by all loading port Agents to Bushire Agents as far in advance of vessel's arrival as possible:
Cargo Manifest (6 copies).
Freight Manifest (2 copies).
B/L Copies (2 copies each).

All cargo shown on manifest must be landed at the port, and it is therefore essential that short-shipments, cancellations, diversions, etc. (if any) be reported as early as possible and manifest should be corrected before submission to Port Authorities to avoid payment of fines. Stowage plans and hatch lists should also be sent ahead, giving ample time to be studied by Cargo Supervisor for unloading arrangements.

PILOTAGE: Compulsory. Application for Pilot to be made well in advance through Bushire Port Radio EQM, 500 kc/s. Agents may also arrange pilotage but should be advised of ETA well in advance.

ANCHORAGE: In outer port in (approx.) position 28° 58′ 30″ N., 50° 44′ 50″ E.

RESTRICTIONS: Entry and departure day or night. Depth in outer channel 10.5 m. at LW. Depth of inner channel, 30 ft. at LW and 35 ft. at HW.

The depth alongside the berth is 30 ft. at LW and 37 ft. at HW.

MAX. SIZE: LOA 600 ft. Max. draft see "Berthing".

RADIO: Bushire Port Radio EQM, 500 kc/s.

VHF: VHF radio, operating on International VHF Marine Channels 13, 16 and 25. MF call sign EQM available at following zone times: 0500 to 0800 hrs. and 1200 to 1500 hrs.

TUGS: Normally not used. In event of bad weather tug will assist berthing. 2 small and 1 large tug available.

BERTHING: Jetty 360 m. long.
Max. draft No. 1 Jetty – 28 ft.
No. 2 Jetty – 25 ft.
Dolphins – 29 ft.
Navy Jetty – 21 ft.

MEDICAL: 24 hours advance notice of medical requirements to be passed to Agents. Doctor available for vaccinations and inoculations.

FRESH WATER: Available at berths ex-pipe-line.

FUEL: Not available.

HATCHES: To be opened and closed by shore labour.

CUSTOMS: Customs Officer will seal the store room. All liquor and cigarette stocks will be placed under bond and reasonable ship's requirements should be taken from store before sealing.

CARGO GEAR: Discharge by ship's gear. Heavy-lift crane capacity 15 tons available. There are also some private cranes available, but these cranes are stationed in Bushire for limited periods only. The lifting capacity of these cranes varies from 35 to 100 tons.

IDENTIFICATION CARDS: According to regulations in force seamen should hold shore pass issued by respective Agents and signed by the Port Health, Port Police and local town Police authorities. All shore passes should bear a photograph of the holder, in order to facilitate checking at exit of port area. It is therefore necessary for officers and crew to have a photograph ready on arrival at the port to facilitate obtaining shore passes.

CONSULS: None.

REPAIRS: Minor repairs possible by local workshops.

AIRPORT: 7 km. from port. Regular flights.

TIME: GMT plus 3.5 hours.

TELEPHONES: May be connected on board.

SHORE LEAVE: Permitted.

DELAYS: Occasional delays awaiting berth turn.

SHIPMASTER'S REPORT: 1976.

Fresh Water: Available at wharf ex-pipe-line but mains pressure is insufficient to pump water up to deck level of vessels and is therefore only generally available to small craft, e.g. fishing vessels.

Fresh water is also available ex-road tankers (10 and 20 tons capacity) at an approximate cost of 200 rials per ton. Tankers are not equipped with pumps and a portable pump belonging to the Fire Brigade is used.

Identification Cards: Crew members proceeding ashore leave their Seamen's Book or identification card at the wharf check point and collect same on return.

Fuel: Bunker fuels and lubricating oils not available.

Watchmen: Posting of gangway and/or deck watchmen most advisable but recommend these should be provided from crew members.

SHIPMASTER'S REPORT: 1977.
Vessel discharged 726 metric tonnes of crane parts in 2 days (4 hatches).

ETA: To be given at least 7 days in advance through Bahrain Radio as telegrams take 2 days. From the outer anchorage the following Telegram must be sent to "Port Director Bushire" via Bushire Radio EQM 500 kHz: Anchor time, Draft, Length, Breadth, Cargo, Last Port.

Outer anchorage: Buoy No. 2 of fairway bearing 130° and 250° to the prohibited area in 10 to 20 m. water. The anchorage is not protected, but the holding ground is good, even in bad weather.

Pilots: The Pilot comes by a fast blue boat to the outer anchorage. There is 1 Pilot, also assistant and 1 docking master with 1 assistant, they only come out in daytime and good weather.

Tugs: There are 2 small and 1 large tugboat, which are used for turning the ship.

Pier: The 360 m. long pier has good wooden and rubber fenders and sufficient bollards. Ships always berth port side alongside. The starboard anchor is used for turning.

Clearance: The following documents are necessary:

5 crew lists.
1 health clearance.
1 vaccination list (cholera/smallpox).
1 store list.
1 crew effects list.

The stores and the radio-room are sealed, beer is not sealed.

Immigration: The immigration officials do not come aboard, the Agent takes all seamen's books ashore and exchanges them for shore-passes which are valid from 0600 hrs. until 2200 hrs. while the ship is in port. Before leaving the seamen's books will be returned in exchange for the shore-passes.

Provisions: Fruit and fish can be obtained, good quality and low prices at the local market.

Water: Water from the pier in any quantity and good quality. The pipe-line – pressure is only enough for heights of about 3 to 4 m., so that some "tricks" must be used larger ships.

Doctor: 24 hour's advance notice required.

Sea Protest: Notary public available, no consulates.

Bunkers: Not available.

Repairs: Were urgently required by the vessel and confirmed by Agent's, but nobody came on board.

Photographs: Taking of pictures not allowed, as Bushire is Military Base.

Crew-change: Very easy and can be done even on the outer anchorage when the ship has no clearance. The crew coming without delay directly from the airport to the ship in a launch which costs, for 1 trip (4 hours) only, US $71.00.

AUTHORITY: Port Director.

AGENT: See "Khorramshahr".

CHAR-BAHAR: 25.17 N. 60.37 E.

Considerable development is taking place, and the port is expected to become of considerable importance in the future. No date for expected completion of various development work being undertaken has been received, but we understand that the following plans have been made:—

A Container Terminal with length of 270 m., a warehouse of 9,000 sq. m. and an open area of 60,000 sq. m., suitable for vessels of up to 30,000 d.w.t.

Two Jetties for general cargoes. Length of jetties to be 360 m. with warehouses of 54,000 sq. m., and an open area of 60,000 sq. m., suitable for vessels of up to 20,000 d.w.t.

One Bunkering Jetty. Length of jetty 300 m. and suitable to accommodate vessels of up to 30,000 d.w.t.

CYRUS TERMINAL: 29.01 N. 49.28 E. (See Plan Book)

Oil loading terminal of the Iran Pan American Oil Company.

LOCATION: Open, unsheltered submarine export mooring, Lat. 29° 01′ 27″ N., Long. 49° 28′ 51″ E. Storage barge (*Pazargad*). Lat. 29° 01′ 57″ N., Long. 49° 29′ 30″ E.

APPROACHES:

Obstructions. In addition to submarine export mooring and storage vessel *Pazargad*, various oil wells and production structures located in immediate vicinity, which constitute hazard to navigation, as follows:

	Lat.	*Long.*
Well C–2A and the Production Stations	29° 03′ 07″ N.	49° 29′ 57″ E.
C–3	29° 02′ 38.7″ N.	49° 27′ 23.1″ E.
C–4	29° 00′ 15″ N.	49° 32′ 00″ E.
C–5	29° 02′ 52″ N.	49° 31′ 34″ E.
C–6	29° 03′ 57″ N.	49° 29′ 57″ E.
C–7	29° 03′ 31.2″ N.	49° 29′ 05.6″ E.
C–8	29° 03′ 31.2″ N.	49° 30′ 48″ E.
C–9	29° 02′ 15″ N.	49° 29′ 57″ E.
C–10	29° 03′ 33″ N.	49° 27′ 22.5″ E.
C–11	29° 04′ 51″ N.	49° 26′ 31″ E.
C–12	29° 03′ 33″ N.	49° 23′ 56.5″ E.
C–13	29° 02′ 41″ N.	49° 25′ 39.5″ E.

Safest and most desirable direction of approach to Cyrus Terminal is from S.E. Due to numerous obstructions noted above any approach should be made with extreme caution.

Navigational Aids. All structures located within Cyrus Terminal area display interrupted quick flashing white lights and sound a fog horn. The storage barge *Pazargad* displays, as required, those day and night signals as prescribed by articles 4 (b) and 11 (c) of International Rules. The 6 mooring buoys for the Cyrus Terminal are not lighted.

DOCUMENTS:

Bill of Health.
Health Declaration (International Health Form to be filled out by Master on arrival).
Manifest (if with cargo certified by Iranian Consulate. If vessel is in ballast, no legalisation dues).
Clearance (from last port).
Register.
5 Crew Lists.
Passenger Manifest (if any passengers are on board).
5 Store Lists.
Bonded Store List.

PILOTAGE: Vessels will be boarded by Mooring Master of IPAC within 2 miles, approximately 180° true from *Pazargad*. Mooring Master will advise Master on approaches to berth, mooring and unmooring, connecting and disconnecting submarine hose and all other operations within berthing area. All manoeuvring within loading berth area shall be done only in accordance with advice of an IPAC Mooring Master, subject to understanding that Master shall remain solely responsible for safety and proper manoeuvring. Master or qualified deck officer must be on bridge at all times while ship manoeuvring.

Vessels requested to have pilot ladder safely and securely rigged, ready for immediate use, and long enough to reach Mooring Master's launch. If at night, adequate lighting must be rigged overside for Mooring Master to approach side of ship and climb ladder safely. Adequate searchlights should also be rigged on both wings of bridge when mooring at night, to assist in running lines to buoys.

ANCHORAGE: Area bound by: 28° 59′ 00″ N. to 29° 01′ 00″ N. between meridians 49° 28′ 00″ E. to 49° 31′ 00″ E. Depth of water 24 fathoms.

Masters cautioned not to anchor North of Lat. 29° 01′ 00″ and East of Long. 49° 31′ 00″ as there are numerous flow lines on sea bed connecting various structures, storage tanker and submarine terminal. During Winter months, November through March, severe South-easterly storms often encountered with little or no indication of impending storm. Vessels at anchor, and loading in submarine terminal, must have engines ready with full power for immediate use. Masters cautioned to use adequate scope of chain while anchored awaiting berth.

RESTRICTIONS: None. Terminal operates 24 hours per day, 7 days a week. Ships moored, loaded and unmoored at any hour, weather and other circumstances permitting. Terminal will never be closed due to religious holidays.

MAX. SIZE: Ship loaded by means of submarine pipe-line and 1 hose at 1 loading berth, located in approximately 140 ft. of water. Mooring buoys numbered 1, 2, 3, 4, 5 and 6. Starting with No. 1 East of mooring and numbered consecutively in clockwise direction. Max. capacity 70,000 d.w.t., max. length 950 ft.

HEALTH: The rules governing quarantine are the same as found in other ports of the world. Owners should check with Agent respecting any recent imposition of anti-epidemic regulations and requirements for additional injections for Crew members.

RADIO: *Advice of Arrival:* Incoming tankers must send incoming ETA at least 3 days before arrival. The OSCO main radio station at Abadan will handle IPAC's radio traffic, pre-arrival messages, etc., for vessels calling Cyrus Terminal. The station call sign is EQZ. Messages for IPAC should be prefixed "Cyrusiran IPAC" with copy to Agent. Further ETA messages should be sent when vessel 24 and 12 hours distant from Cyrus Terminal and at any other time any appreciable change occurs in original ETA or those subsequent thereto. The 12 hours ETA should include a positive statement regarding "ship's readiness to load" on arrival and the number of hours that will be required to discharge clean ballast after ship is berthed in mooring.

Radio Watches: While at the anchorage off Cyrus Terminal, vessels should maintain normal listening watches on both HF and WT.

VHF: Cyrus Terminal base (*Pazargad*) is equipped with VHF radio telephone and maintains a radio watch. Vessels arriving at Cyrus Terminal may communicate with the *Pazargad* on Channel 6.

TUGS: A charge for each tug movement will be made in accordance with rates established by IPAC. When tug/tugs are standing-by vessel mooring/unmooring, for use if required, the full fee will be charged. IPAC maintains launches to assist in mooring and unmooring.

BERTHING: (Also see "Max. Size"). Tankers to have ready: *(a)* Windlass and deck winches fore and aft. *(b)* 12 good manila or synthetic mooring lines, each not less than 120 fathoms in length, with efficient stoppers for each line. *(c)* On port or starboard side as directed, opposite ship's manifold, equipment capable of lifting submarine hose safely and expeditiously. Weight of lift 5.5 tons. *(d)* 1 bower anchor ready for immediate use, with minimum of 120 fathoms of chain. Anchors, chains and anchor windlass must be in good condition. *(e)* Equipped to fit flanges on submarine hoses, which are of ASA standards.

Permanent moorings in the berth consist of 6 steel cylindrical buoys each fitted with a quick release hook to which ship's mooring lines attached by mooring launches. The berth is laid out on a 2 heading basis, using 12 mooring ropes (4 bow, 4 beam, and 4 quarter).

LOADING: Maximum crude oil loading rates for a tanker using one 12-in. deck hose and 20 p.s.i. at ship's rail is approximately 12,000 b.p.h. Requested that ships receive oil as fast as it can be delivered, with due regard for safety, also that any fittings on manifold such as "Y's", strainers, or mud boxes, which tend to restrict flow of crude oil into the ships, be removed before arrival at terminal. Preferable that connections be provided so that a 12-in. deck hose can be used.

BALLAST: It is the ship Master's responsibility to see that no oil (crude, bunker, diesel or bilge water) is pumped or spilled overboard from the ship. Drip pans, etc. should be used at all times, especially when disconnecting hoses in order to prevent any loss of oil overboard. The waters in and adjacent to the Cyrus Terminal must not be polluted, and only clean, oil-free ballast (and/or bilge water) may be discharged inside of a circle 50 miles radius around the Cyrus installations.

Discharge of oil mixture from tankers while enroute is prohibited except when the following conditions are all satisfied.

1. The instantaneous rate of discharge of oil content of the oily mixture does not exceed 60 litres per mile.
2. The total quantity of oil discharged on ballast voyage does not exceed 1/15,000 of the total cargo carrying capacity.
3. The tanker is more than 50 miles from the nearest point on the Iranian coast.

Masters are warned that when disposing of dirty ballast or bilge waters (50 miles or more off Cyrus), all pipe-lines, sea suctions, strainers and pumps that are later to be used to discharge clean ballast, must be flushed clean, so that there will be no chance of even a small amount of pollution when the clean ballast is pumped overboard.

A vessel must have sufficient ballast for safe manoeuvring. However, by a careful watch of the weather, especially in the Summer months, by frequent interchange of weather information and berthing instructions and by a knowledge of the behaviour of his own vessel, a Master may desire to come to the Terminal with minimum ballast, thereby lessening any possibility of infringement of the pollution restrictions of the area.

As soon as practicable, after arrival all vessels' tanks will be inspected for evidence of oil in ballast, and during discharge of ballast similar inspection will be continued. In order to ensure the cleanliness of the ballast during or after the berthing of tankers, a sample of the said ballast will be tested before discharging. Ballast water so tested should prove that the oil content of the discharge is less than 30 parts per million of the mixture. If evidence of oil appears at either of these inspections, the ship must return at once to a point not less than 50 miles from the Cyrus installations and there, completely discharge all oily or dirty ballast.

The above rules also apply to bilge water discharged from the vessels.

Any vessel required to return to a position at least 50 miles off Cyrus, for the purpose of discharging dirty ballast, cleaning tanks or for any similar reason, automatically nullifies any Notice of Readiness already tendered, and at the same time, loses any priority held for loading.

Upon return from the sea, the vessel will be entered for loading at the time of the second arrival, when a new Notice of Readiness will be tendered.

The contamination with oil, when discharged at Cyrus Terminal or at anchorage must be such that even on a clear sunny day no oil could be traced on the surface of water.

If, during the first inspection or during progress of loading, it is revealed that a ship's tanks are not oil-tight, the ship will be rejected, or refused further loading. Ship will not be accepted for loading later, unless satisfactory evidence, duly certified by Lloyds or American Bureau of Shipping Surveyors, or any other recognized survey agency, of effective repairs is submitted.

In addition to the lights usually displayed, vessels discharging ballast or loading cargo during darkness, will illuminate the area round the ship, to the satisfaction of the Mooring Master, in order to readily detect any oil on the surface of the sea and take appropriate action. Vessels unable to illuminate the sea satisfactorily, may not discharge ballast during darkness. Vessels should provide suitable flood lights for working on deck during night operations.

Loading and Deballasting Simultaneously: Vessels equipped with a separate system of ballast tanks will be allowed to discharge clean ballast and load oil simultaneously, providing approval of both Terminal Superintendent and Petroleum Inspector is secured.

MEDICAL: Neither medical nor hospital facilities provided by IPAC. Private doctors and hospital facilities available at Tehran or Abadan. Emergency hospital cases only can be handled on Kharg Island, approximately 53 miles from Cyrus Terminal.

DENSITY: Salinity approximately 20% more than normal sea water.

TIDE/CURRENT: Tidal range between 6 and 8 ft. Currents generally on axis of ship berthed in mooring; however, rotary currents can be expected.

FRESH WATER: No fresh water available.

FUEL: No bunkers or lubricants available.

FIRE PRECAUTIONS: A continuous and efficient fire watch must be kept on deck and in engine room. In event of fire breaking out in any part of a vessel, however minor it may be, fire alarm must be given immediately. This will consist of a succession of long blasts on ship's whistle, together with a rapid continuous ringing of ship's bell.

CUSTOMS ALLOWANCES: Present regulations allow each seaman to retain a maximum of 50 cigarettes or 1 oz. of tobacco or 5 cigars. The balance of all smoking items must be collected and carefully listed prior to arrival. This list will be checked by Customs before sealing locker. If any discrepancies, vessel is subject to a fine.

CONSULS: No consulates at Cyrus Terminal; consular or diplomatic representatives for most nations maintain offices in Tehran and some in Khorramshahr.

REPAIRS/STORES: Port is considered an "open roadstead", and under no circumstances may engines be shut down for repairs while ships are moored in submarine berth. No facilities for making vessel repairs. No spare parts, stores or supplies should be sent to Cyrus Terminal for delivery to a ship.

REPATRIATION: No facilities.

TIME: GMT plus 3.5 hours.

SHORE LEAVE: There is no shore leave permitted due to lack of facilities. No visitors permitted on tankers loading.

INSPECTION SERVICE AND MARINE SURVEYS:

Petroleum inspection services available at Cyrus Terminal from Saybolt. IPAC also inspects cargoes on specific request of off-taker companies.

Classification agencies: Lloyds Register of Shipping (maintain office with Surveyor in Khorramshahr). American Bureau of Shipping (to be arranged from Bahrain where nearest ABS office available, with at least 5 days advance notice. A Surveyor available in Tehran and Khorramshahr). Bureau Veritas (Agents and Surveyor in Khorramshahr). Norske Veritas (Agents in Khorramshahr). German Lloyd (Agents and Surveyor in Khorramshahr).

GOVERNMENT OFFICIALS: Iranian officials, such as the Customs Officers, Immigration Officer and Quarantine Officer, are available on the barge *Pazargad.* Should Customs Guards be stationed on board vessels while in the moorings, it is expected that ships will provide food for these guards and other officials. All vessels calling at Cyrus Terminal must provide an accommodation ladder, rigged for Iranian officials.

AUTHORITY: Iran Pan American Oil Co.

AGENT: See "Khorramshahr".

Ships' mail for vessels calling Cyrus Terminal to be addressed to: Gulf Agency Co. (Iran) Ltd., POB 62, Abadan, Iran.

KHARG ISLAND: 29.14 N. 50.19 E. (See Plan Book)

A. DARIUS TERMINAL. Oil-loading terminal of the Iran Pan American Oil Company.

B. KHARG TERMINAL. Oil-loading terminal of the Iranian Oil Exploration and Producing Company. Including Sea Island Terminal.

C. KHEMCO TERMINAL. Loading terminal of Kharg Chemical Co.

GENERAL: (Items common to all Terminals): There are no ballast disposal facilities at Kharg and it is of the utmost importance that all vessels arriving at the anchorage should ensure that all water ballast and pipe-lines are completely clean.

FLAG: All vessels required to fly Iranian Ensign on foremast during daylight hours in Iranian waters. Iranian territorial waters extend 12 miles seaward from mainland and adjacent islands. Iranian flags may be obtained from Agent.

DOCUMENTS:

Bill of Health (certified by Iranian Consulate at port of origin or port of call. If no Iranian Consul available, the legalisation fees are payable at Kharg Island).

Health Declaration (International Health Form to be filled out by Master on arrival).

Manifest (if with cargo certified by Iranian Consul (see "Bill of Health" above). If vessel is in ballast, no legalisation fees due).

Clearance (from last port).

Register.

Crew List.

Passenger Manifest (if any passengers are on board).

Store List.

Bonded Store List.

APPROACHES: Vessels approaching Kharg from South, should keep at least 2 miles to East of Island. Vessels approaching Kharg from North should keep to West of Island, as Khargu Island to the North is very low lying and difficult to see at night until dangerously close-to.

Landfall. 3 high gas flare towers, 2 in the South and 1 to the North of the Island, make a most conspicuous landfall. At night, from a distance, the light from these flares tends to obliterate the various navigation lights. At night the glow from the 3 gas flares is visible from great distance, far beyond the range of any navigation lights. However on occasions, 1 or more or all of the flares may not be burning, making the main navigation lights more readily visible.

Navigational Dangers. Eastern coast is open and free from navigational dangers, except for coral reef, which extends for about 0.25 mile seawards along whole coast line. To S.W. of Island, numerous oil platforms in positions up to 5 miles offshore.

Kharg South Beacon. 29° 12′ 46″ N., 50° 19′ 15″ E. At Southern end of Island, rotating white light, on steel tower, 295 ft. above MHHW, 2 flashes every 12 seconds, visibility 24 miles. Obscured by high ground and oil tanks between 151° and 215° from seaward. Light beam partly diverged upwards for aircraft. This is the main navigation light for Kharg area.

Kharg North Beacon. 20° 15′ 02″ N., 50° 18′ 18″ E. At Northern end of Island, white light on steel tower, 261 ft. above MHHW, 2 flashes every 6 seconds, visibility 12 miles. Obscured by high ground and oil installations between 330° and 352° from seaward.

Khargu Beacon. 29° 20′ 20″ N., 50° 21′ 18″ E. At Northern end of Khargu Island, on a steel tower 59 ft. above MHHW, a white light with 10° red sectors towards Ganaveh and Kharg Island to indicate general directions of submarine pipe-lines, 3 flashes every 8 seconds, visibility, 10 miles red sector, 15 miles white sector. Obscured between 011° and 041° from seaward by Kharg Island. Radar reflectors fitted to North and East sides of tower top.

Ganaveh Beacon, 29° 35′ 20″ N., 50° 29′ 50″ E. On mainland, at start of submarine pipe-lines to Island, 2 miles N.W. of Ganaveh village, on steel tower, white light with 10° red sector along general direction of submarine pipe-lines, 1 flash every 5 seconds, visibility 10 miles red sector, 15 miles white sector. Light beam partly diverged upwards for aircraft.

South-east Buoy. 29° 11′ 29″ N., 50° 19′ 51″ E. Red can buoy, white light, 1 flash every 2 seconds. Near edge of reef, S.E. Kharg Island in 54 ft. of water.

North-east Buoy. 29° 14′ 51″ N., 50° 20′ 10″ E. Red conical buoy, white light, 1 flash every 6 seconds. On Northern boundary of port limits.

Channel Buoy. 29° 16′ 12″ N., 50° 20′ 27″ E. Red conical buoy, white light, 1 flash every 3 seconds. In Eastern end of channel between Kharg and Khargu Island.

Radio Masts. At South end of Kharg Island a high radio mast painted red and white positioned at 29° 12′ 47″ N., 50° 19′ 15″ E., approximate elevation 510 ft. Fitted with fixed red lights. Another radio mast, also painted red and white, positioned at 29° 14′ 10″ N., 50° 18′ 26″ E., approximate elevation 367 ft., fitted with fixed red light.

Dideban Tomb. On highest point of Kharg Island, 29° 14′ 57″ N., 50° 18′ 29″ E., a small domed building located, elevation 290 ft.

Mir Muhammad Tomb. On N.E. part of Kharg Island at 29° 15′ 10″ N., 50° 18′ 46″ E., conical shaped tower surmounted by small dome, elevation 165 ft.

Khargu Trees. On Khargu Island, at 29° 18′ 45″ N., 50° 20′ 30″ E., a small group of trees, only ones on island, visible from long distances.

Notice Boards. On North, S.E. coast and S.W. of Kharg Island and along coasts of Khargu Island, large white notice boards indicating prohibited anchorages surrounding submarine pipe-lines.

Port Area. The area within:

29° 12′ 23″ N.	29° 14′ 53″ N.
50° 18′ 36″ E.	50° 21′ 17″ E.
29° 12′ 21″ N.	29° 14′ 53″ N.
50° 21′ 40″ E.	50° 20′ 20″ E.

offshore from Kharg Island has been proclaimed a port area. Port area used by vessels manoeuvring to and from oil-loading terminals. The whole of area within port limits declared a Prohibited Anchorage, and, a Restricted Manoeuvring Area. Vessels must not enter within port limits unless Berthing Master is on Board.

PILOTAGE: Vessels should proceed to Eastern Anchorage, outside port limits (Prohibited Anchorage and Manoeuvring Area) approximately 1.5 miles East of oil loading jetty, and await arrival of Berthing Master.

ANCHORAGE: The approved Anchorage Area is to East of Eastern boundary of Port Limits, where holding ground is good. All vessels on arrival at Kharg must proceed to anchorage area and await instructions.

Prohibited Anchorages. 3 Prohibited Anchorages in the Kharg Area:

(a) Submarine Pipe-lines. Anchorage prohibited in vicinity of submarine oil pipe-lines laid between North coast of Kharg Island and mainland near Ganaveh.

(b) Offshore Oil Platforms. Anchorage prohibited to S.W. of Kharg Island in vicinity of numerous oil wells and drilling platforms extending 5 miles or more out to sea.

(c) Harbour Area (East): The area surrounding the "T" jetty and extending approximately 2.5 km. offshore from the East coast has been declared as a Harbour Area.

(d) Harbour Area (West): The area surrounding the sea island and extending to a distance of approximately 4 km. offshore has been declared as a Harbour Area. The Harbour Area is used by vessels manoeuvring to and from the oil loading jetty. No vessel is allowed to enter or anchor within these areas unless a Berthing Master is on board.

Cautions. (a) Unlit mooring buoys at S.E. of Kharg Island (see Darius Terminal). (b) Oil Platforms to S.W. of Kharg Island. (c) Aircraft approach lane S.E. of a point mid-way between Naval Boat Harbour and Kharg North Buoy, in N.W. corner of Port Area.

RADIO: OSCO main radio station at Abadan will handle radio traffic. Call sign EQZ. Vessels bound for Kharg Terminal should prefix messages with "Khargiran", and vessels bound Darius terminal should prefix with "Khargiran IPAC", in both cases with copy to Agents.

Radio Watches: While at anchor off Kharg Island, vessels should maintain normal listening watches on station EQZ on WT, and Kharg Terminal on VHF. Use of the ship's radio station and/or battery-charging equipment prohibited during cargo transfer operations.

Schedule of watch (GMT) (Hours)	*Listening watch frequencies* kHz	*Transmitting frequencies* kHz	*Receiving frequencies* kHz	*Remarks*
Continuous	500	500	500	Distress: Station is equipped with international Auto-Alarm receiver on 500 kHz.
Continuous	500	428	405–535	Traffic list every 2 hours from 0105 to 2305 hrs. GMT.
0400–0700	8356–8374	8471	8374–8460	
0700–0900	12534–12561	13069.5	12561–12689	*Traffic lists every 2 hours from 0405 hrs. GMT.
1000–1300	12534–12561	13069.5	12561–12689	
1400–1700	8356–8374	8471	8374–8460	
1700–1830	4178–4187	4294	4187–4231	

*During scheduled watches on HF while station/EQZ is not actually working with ships, traffic lists are transmitted automatically and continuously on frequencies 4294, 8471 and 13069.5 kHz according their schedules of watch.

VHF: Kharg Terminal equipped with VHF radio telephone, using international frequencies. Continuous watch kept on international calling and emergency Channel 16, frequency 156.80 mc/s. Other channels, available after contact has been established are: No. 12, 11 and 10. Masters recommended use this facility when within range, particularly when approaching port. In poor visibility, when vessel's approach may not be observed from shore, VHF communication may be the means of avoiding delay in mooring/berthing.

HEALTH: Tankers calling at Kharg Island and requiring radio pratique should cable Agents 48 hours prior to arrival advising the following details:

(a) Number of persons on board, including Master and passengers.
(b) Last port of call.
(c) Ports of call during the voyage.
(d) Duration of voyage.
(e) If any person on board requires vaccination against smallpox or cholera.
(f) If there has been any case of illness of contagious nature.

If approved, the Master will be notified and the vessel will be allowed to enter port without yellow flag or night quarantine signal.

MEDICAL: Small hospital with clinic on Kharg operated by National Iranian Oil Company for minor medical treatment. More serious cases may have to be sent by air to Abadan Hospital. Any medical services required should be brought to attention of Medical Officer when he boards vessel to grant pratique.

DENSITY/TIDE/WINDS: Salinity of sea approximately 20% more than normal sea water. Surface temperature of sea ranges from 63° to 97° F depending on season. The extreme tidal range between 7 and 8 ft. with maximum rate of about 1.5 knots. Wind directions and velocity subject rapid change without warning and precautions necessary to avoid difficulties. Heaviest seas and swells while in port are from N.E. through S.E.

Tidal heights	*Tidal streams*	
L.A.T. = +0.4 ft.	Slack water	10.75 hrs. before HHW
MLLW = +1.8 ft.	Ebb (full)	7.75 hrs. before HHW
MHLW = +3.6 ft.	Slack water	4.50 hrs. before HHW
MSL = +4.1 ft.	Flood (full)	1.50 hrs. before HHW
LLHW = +4.7 ft.	Slack water	1.00 hr. after HHW
MHHW = +6.5 ft.	Ebb (max.)	3.75 hrs. after HHW
H.A.T. = +8.2 ft.	Slack water	6.50 hrs. after HHW
Heights in feet above Chart Datum	Flood (max.)	9.50 hrs. after HHW
		Times are approximate only

FRESH WATER: Not available.

STORES: Commissary supplies, as well as steward's stores, in limited quantities, can be arranged through Agent with at least 5 days advance notice.

Not allowed to be placed on board while vessel is berthed, can be taken at anchor or boat comes alongside immediately after leaving jetty. Transfer of bonded stores is permitted, with Customs in attendance, while alongside.

LAUNDRY: No laundry services available.

IDENTIFICATION CARDS: Each seaman will be issued with a pass which will be punched when crossing the jetty limits going out and in, and may be used once only. In addition to this pass, seamen should carry an Identification Card or Vaccination Certificate, bearing the owner's photograph.

CUSTOMS ALLOWANCES: Present regulations allow each seaman to retain maximum 50 cigarettes or 1 ounce of tobacco or 5 cigars. The balance of all smoking items must be collected and carefully listed prior to arrival. This list will be checked by Customs before sealing locker. If any discrepancies, vessel subject to fine.

CONSULS: No consulates at Kharg Island; however, consular or diplomatic representatives, for most nations, maintain offices in Teheran, and some in Khorramshahr.

REPAIRS: Masters of vessels loading or discharging at Darius Terminal are advised that this port is considered an "open roadstead" and, under no circumstances may engines be shut down for repairs while ships are moored in submarine berth. No facilities at Darius Terminal for making vessels repairs, and it is emphasised that all vessels in submarine moorings must be in condition to clear immediately on instructions to do so. No repairs allowed alongside the Oil Loading Jetty at Kharg Terminal. Ship's main engines must be available at all times while alongside jetty.

REPATRIATION: The following is part of a letter from Oil Services Company of Iran to all shipping agencies Kharg Island.

"You are well acquainted with the fact that under normal operating circumstances only a very limited amount of sleeping accommodation is available at the Kharg United Seamen's Services Centre, which is the only, repeat, only available premises at Kharg for overnight lodgings. At present the United Seamen's Services Centre is undergoing modification, and when this is completed there will be only 18 beds available. It is not O.S.C.O. policy to permit building of any additional sleeping accommodation.

"Due to the above limitation it will now be our policy to limit the number of people sleeping overnight in the United Seamen's Services Centre to 18 and no other Crew members will be accepted for overnight accommodation.

"It will be the responsibility of agencies to co-ordinate crew changes so that no overload is imposed on U.S.S. Centre.

"In order to ensure this, all crews arriving from abroad will have to travel via Abadan where ample overnight accommodation is available and where they can be retained until required at Kharg. Ship's crew leaving their ships should be retained aboard until a suitable commercial or charter flight is arranged.

"Any Crew members arriving on Kharg direct from Teheran will not be allowed to land at Kharg unless

1. The vessel they are joining is at Kharg, or will be at Kharg before 0100 hrs. next day.
2. The Agent has a written agreement from the manager of the U.S.S. that sleeping accommodation is available.

"If neither provisos 1 or 2 are complied with the Crew members will be oncarried and accommodated in Abadan at the Agent's expense.

"To summarise: no sleeping accommodation is available at U.S.S. Centre unless the Agent obtains written agreement to that effect from U.S.S. Centre manager. Agents not having written agreement for sleeping accommodation will either have to return Crew members to their respective ships or arrange commercial or charter flights for them to stay in Abadan.

AIRPORT: Small airport used by Oil Company aircraft and Iranair flights to and from Abadan. Due security arrangements movement of crew must be programmed through Agent.

TIME: GMT plus 3.5 hours in Winter and plus 4.5 hours in Summer.

A DARIUS TERMINAL (Additional requirements and details).

Terminal operates 24 hours per day, 7 days a week. Ships moored, loaded and unmoored at any hour, weather and other circumstances permitting. Terminal will never be closed due to religious holidays.

LOCATION: A submarine terminal at S.E. corner off Kharg Island 29° 12′ 40″ N. 50° 20′ 40″ E.

LANDMARKS: *OSCO (Iranian Oil Services Company) Jetty:* Approximately half a mile North of the mooring is a "T" shaped wharf for the berthing of Supertankers.

Khemco Jetty: Approximately quarter mile West of the terminal is a dolphin type jetty for berthing LPG and sulphur ships.

South Gas Flares: At the South end of Kharg Island, 2 very conspicuous gas flares bearing 277°, 1,900 ft. and 271°, 2,150 ft. from Kharg South Beacon. Approximate elevations: 400 ft.

North Gas Flares: In the centre of Kharg Island 2 very conspicuous gas flares bearing 191°, 3,050 ft. from Kharg North Beacon, elevation 435 ft.

Khemco Gas Flares: On the S.E. of Kharg Island 2 small gas flares burning in the Kharg Chemical Plant.

Note: At night, the glow from the 4 gas flares is visible at great distances. However, on occasions, 1 or more or all of the flares may not be burning.

Also see "Approaches" at beginning of Kharg Island.

RADIO: *Arrival Advice:* It is important that ships establish radio contact with IPAC when 3 days distant from Kharg Island and maintain this contact until just prior to arrival at the Terminal. All ships should send a 72 hour ETA message to IPAC, giving the best estimate of ship's arrival time at the Terminal. This first ETA message should also include a definite statement of the details of any equipment required from shore for connecting submarine hoses to ship's manifold. Further ETA messages should be sent to IPAC when the vessel is 24 hours and 12 hours distant from Kharg Island and at any other time when an appreciable change occurs in the original ETA or those subsequent thereto. The 12 hour ETA should include a positive statement regarding "ship's readiness to load" on arrival, and the number of hours that will be required to discharge clean ballast after ship is berthed in mooring.

Ship-to-shore communication: Kharg Terminal (IPAC & OSCO) is equipped with VHF radio-telephone, using international frequencies. A continuous watch is kept on the international calling and emergency Channel No. 16, frequency 156.80 mc/s. Other Channels which are available after contact has been established are:

Channel	*Frequency in mc/s.*	*Call sign*
IPAC 14	156.700	IPAC Marine
IPAC 6	156.300	IPAC Marine
OSCO 12	156.600	Kharg Pilot
OSCO 20	157.000	Kharg Pilot

Masters are recommended to use this facility when within range, particularly when approaching the port. In poor visibility, when a vessel's approach may not be observed from the shore, VHF communication may be the means of avoiding delay in mooring. While a ship is in mooring, communication will be by portable VHF radiotelephone units. The Mooring Master will advise Masters and Officers regarding the emergency whistle signals set up for use in event VHF radiotelephone units becoming inoperative. The use of the ship's radio station and/or battery charging equipment is prohibited during cargo transfer operations.

Radio Watches: While at anchor off Kharg Island, vessels should maintain normal listening watches with station EQZ on W/T and Kharg Terminal on VHF.

MOORING: Vessel requested to have Pilot ladder safely and securely rigged, ready for immediate use, and long enough to reach Mooring Master's launch. Mooring Master will board 2 miles seaward of the Terminal sea-buoy. Adequate searchlights should be rigged on both wings of bridge, when mooring at night, to assist in running lines to buoys.

Raising, connecting, disconnecting and lowering of submarine hoses will be performed by IPAC line handling crew as advised by Mooring Master, who will remain on board while ship in moorings. A capable winchman to be provided by ship.

Mooring buoys for Darius Terminal not lighted. Permanent moorings in berth consist of 5 steel cylindrical buoys each fitted with quick release hook, to which ship's mooring lines are attached by IPAC's mooring launches. The berth is laid out on the one heading basis, using both ship's bower anchors with 9 mooring ropes (4 beam, 4 quarter and 1 stern). Mooring buoys numbered 1, 2, 3, 4 and 5. Starting with No. 1. East of the mooring and numbers running consecutively in a clockwise direction.

Tankers to have ready: *(a)* Windlass and both bower anchors, each with not less than 120 fathoms of chain. *(b)* 9 good manila or synthetic mooring lines, each not less than 120 fathoms in length, with efficient stoppers for each line. *(c)* On port side opposite ship's manifold, equipment capable of lifting submarine hose safely and expeditiously. Weight of lift 5 tons.

LOADING: Ship loaded by means of submarine pipe-line and 2 hoses at 1 loading berth, located approximately 1 mile offshore in over 65 ft. of water. Crude oil loading hoses lifted on port side. Maximum crude oil loading rate for tanker using two 12-in. deck hoses and 20 p.s.i. at ship's rail is approximately 5,000 t.p.h.

In order to save ship time as well as to make berth available for others, requested that ships receive oil as fast as it can be delivered, with due regard for safety. Also requested that any fittings on ship's manifold such as "Y's", strainers, or mud boxes, which tend to restrict flow of crude oil into ship, be removed before arrival at terminal. It is preferable that connections be provided so that a 12-in. deck hose can be used. Vessels must be equipped to fit flanges on submarine hoses, which are of ASA standards.

FIRE PRECAUTIONS AND SAFETY: Full instructions will be given by Mooring Master, but vessel's personnel responsible for safety of vessel and must take all necessary precautions, whether or not so advised by Mooring Master.

During time vessel moored in Darius Terminal, a continuous and efficient fire watch must be kept on deck and in the engine room. In the event of fire breaking out in any part of vessel, however minor it may be, fire alarm must be given immediately. This will consist of a succession of long blasts on ship's whistle, together with a rapid and continuous ringing of ship's bell.

EMERGENCY MEDICAL ASSISTANCE: Vessels requiring emergency medical assistance should hoist international code flag "W" in daylight, and at night send "W" (· – –) on blinker light. To attract immediate attention, the same signal "W" (· – –) should be given on ship's whistle in either day or night hours. The signal should be repeated until acknowledged visually by either another ship in the moorings, or from IPAC launch. As soon as signal is received. Terminal officials will advise Agent as soon as possible of the emergency medical aid required.

FUEL: No bunkers available at submarine mooring. Bunkers may be loaded at OSCO main jetty having obtained nomination through Iranian Oil participants in London. Tankers loading crude oil at OSCO "T"-head jetties have at all times priority for berth, over the vessels lifting bunkers only. Marine lubricants not available, except through marketing representatives by arrangement through Agent.

CURRENTS: Generally on the axis of the ship berthed in the mooring; however, rotary currents can be expected.

SHORE LEAVE: For personnel of vessels loading or unloading at the Terminal is arranged between Agent and Iranian Security Officer aboard vessel. Ship's personnel (other than medical or emergency cases) not allowed to disembark or embark at Terminal. Sufficient personnel must be aboard at all times for letting go lines and clearing moorings immediately.

B. KHARG TERMINAL (Additional requirements and details)

OIL LOADING JETTY: "Tee" head with overall length of 6,038 ft. between fender faces. The fender to fender width is 138 ft., for the section South of trestle approach, and 124 ft. for North section. Jetty face is aligned in direction 172° 35′ – 352° 35′. Deck level 22.0 ft. above chart datum. The jetty, being on Eastern side of Island, is sheltered from prevailing N.W. winds, but exposed to S.E., when during Winter storms, waves of 8 to 10 ft. often occur. A maximum wave height of 15 ft. has been recorded at Southern end of jetty, under such conditions.

Berth	Depth of water (metres)	Maximum capacity D.W.T.*	Loading and bunker arms†	Height limits ship's manifold in metres above chart datum
1	21.3	250,000	3×16 in. 2×12 in.	4.3 to 23.8
2	19.8	38,000	4×12 in.	3.4 to 18.9
3	21.3	250,000	3×16 in. 2×12 in.	4.3 to 23.8
4	20.1	65,000	5×12 in.	3.4 to 18.9
5	21.3	250,000	3×16 in. 2×12 in.	5.8 to 25.3
6	20.4	120,000	3×16 in. 2×12 in.	4.3 to 23.8
7	18.3	175,000	3×16 in. 2×12 in.	4.3 to 23.8
8	19.2	45,000	5×12 in.	3.4 to 18.7
9	17.4	140,000	3×16 in. 2×12 in.	4.3 to 23.8
10	17.7	90,000	5×12 in.	3.4 to 18.7

* Subject to weather, tidal conditions and lengths of vessels adjacent berths.

† 12 in. Bunker arms at all berths. All Chiksan arm flanges are series 150 API.

Outer Berths: 9, 7, 1, 3, 5. Inner Berths: 10, 8, 2, 4, 6. Berths Nos. 7, 8, 9 and 10 located North of trestle approach.

SEA ISLAND TERMINAL: A 4 berth Sea Island Loading Terminal is in operation on the West side of Kharg Island.

The structure, 1,800 ft. long, is centred in 29° 13′ 29″ N., 50° 17′ 10″ E., and is aligned in a direction 154°/334°. It is designed to accommodate vessels of approximately 150,000/500,000 tons at No. 11 Berth on the West side, and vessels of approximately 150,000/300,000 tons at No. 12 Berth on the East side.

Unless advised to the contrary, all vessels should proceed to the anchorage East of the Main Jetty.

Vessels instructed to load at the Sea Island are required to rig an accommodation ladder to facilitate the boarding of Customs, Health, and Port Authorities. Agency work and crew changes must also be effected at the anchorage. There is no shore leave from the Sea Island.

The comparatively exposed position of the Sea Island makes additional moorings advisable and vessels should be prepared to use their maximum number of mooring lines. Quick-release hooks are provided for all mooring lines.

Minimum size vessel, about 150,000 d.w.t.

Loading rates of up to 30,000 t.p.h. to one berth can be achieved at the Sea Island.

Only fuel-oil bunkers are available.

Vessels may, if considered necessary, be required to retain on board sufficient ballast while loading cargo to ensure that the loading arms do not exceed their maximum designed elevation.

Berth	Depth of water (metres)	Maximum capacity D.W.T.	Loading and bunker arms	Height limits ship's manifold in metres above chart datum
11	32.0	500,000	4×24 in. 2×16 in.	6.1 to 33.5
12	29.5	300,000	4×16 in. 2×12 in.	6.1 to 28.3

The Sea Island has been extended to the Northward to create two new berths, 14 and 15.

Berth	Depth of water (metres)	Maximum capacity D.W.T.	Loading and bunker arms	Height limits ship's manifold in metres above chart datum
14	25.9	300,000	2×16 in. 4×16 in.	6.1 to 28.3
15	27.4	500,000	2×16 in. 4×24 in.	6.1 to 33.5

Loading Arms: Luceat – quick coupling.

Effective Loading Rate: Berth No. 14 – 16,000 t.p.h. Berth No. 15 – 30,000 t.p.h.

TUGS: Vessel normally berthed with assistance of tugs which, together with Berthing Master, meet vessel at port limits. The tugs will come alongside, normally 1 to the bow and 1 to the stern, as far forward and aft as is safe and practical. Tugs' towing equipment will be used on all occasions.

BERTHING: Approaching berth, 2 fibre-rope headlines should be lowered to mooring launch, for transfer to jetty. 2 stern lines are then handled, preferably one at a time, to avoid possible fouling of vessel's propeller. Positioning of vessel's loading manifold in relation to Chiksan loading arms on jetty has to be carried out to a close tolerance, as directed by Berthing Master, to requirements of jetty operator. On inner berths, particularly Nos. 2, 4 and 8, vessels are berthed head outwards, i.e. stern to trestle. In these cases, vessels are towed stern first by after tug's hook wire, with forward tug either alongside or on towing hook, depending on tidal and weather conditions.

Mooring System. Under normal conditions, 12 lines are used to moor a vessel as follows: Forward: 3 headlines, 2 breast lines and 1 spring. Aft.: 3 stern lines, 2 breast lines and 1 spring.

During Winter S.E. storm period, it is usual to use 1 each additional headline and breast line, at each end making a total of 16 mooring lines. Breast lines and springs of wire rope are acceptable.

Berthing Limitations. Various combinations of wind, sea and tidal conditions, also size, length, ballasted trim and handling qualities of a vessel and available berth space, can effect decision to berth a vessel at Kharg. All these factors have to be evaluated before a final berthing decision is made.

Manifold Position. No berthing where manifold of vessel cannot be positioned, within horizontal limits of Chiksan loading unit arms, due to adjacent occupied berths.

Note: On outside berths, very large vessels of light free board in excess of 70 ft., may be required to retain sufficient ballast, to ensure that their manifolds remain within the vertical range of the Chiksan loading arms, until sufficient cargo is loaded.

LOADING: Both Iranian light and heavy crude oils available at all jetty berths. Crude oil is delivered to jetty from Tank Farm, situated on central plateau of sand, by gravity flow through 4×48-in. diameter pipe-lines and to the Sea Island by 2×78 in. shorelines and 2×56 in. sealines. Loading rates of up to 15,000 t.p.h. to one berth can be achieved at Kharg Terminal. Up to 60,000 t.p.h. can be delivered to all 10 berths simultaneously.

FUEL: Bunkering facilities at each berth. 2 grades available, marine fuel oil and marine diesel oil. Bunkers may be loaded up to a maximum rate of 1,000 t.p.h., and bunkering will normally commence before loading cargo. Only fuel oil available at Sea Island berths.

FIRE PRECAUTIONS: A copy of the "Fire and Safety Regulations" notice is given to Master of every vessel by Berthing Master, at Anchorage. 5 additional copies are passed aboard vessel when it arrives alongside jetty. These extra copies must be posted in conspicuous places throughout the vessel. While a vessel is within Port Area a continuous and efficient Fire Watch shall be maintained on deck and in the engine room. In event of fire, however minor it may be, the Fire Alarm shall be given immediately as follows:

On Board Vessel: Rapid and continuous ringing of ship's bell, together with a succession of long blasts on the ship's whistle or siren.

On Jetty or elsewhere in Port Area: Rapid and continuous ringing of the gongs on the jetty. A push-button alarm system is provided at each berth.

SHORE LEAVE: Fully air-conditioned Recreation Centre operated by United Seamen's Services, situated close to shore end of the trestle to the Oil Loading Jetty. Facilities include: cinema, film exchange, restaurant, dining-room and bar, library and waiting-room, PX gift shop, 2 billiards and snooker tables, 2 table tennis tables, darts, chess, etc., official money exchange.

Note: Shore leave restricted to grounds and buildings of Recreation Centre only.

SAFETY:

Amendment to Safety Regulations and Safety Inspections.

To keep Safety Regulations and Safety Inspections in line with current world-wide practice, the following new Rules will be put in force immediately.

1. At least 50% of the crew including sufficient senior officers shall be available on board at all times to deal with emergencies.
2. Two dry powder extinguishers plus one fire hose to be available at the manifold at all times.
   Note: This is especially important before connecting lines.
3. Present funnel deck hoses, now only required at inside berths, are now required on all berths including Sea Island.

SHIPMASTER'S REPORT: 1977:

There are 4 loading berths on the Sea Island. There are also maximum displacement limits for coming alongside these berths ballasted or with part cargo. On the inside berths the top limit is 175,000 tons and the outside berths it is 250,000 tons displacement.

Also the outside (seaward) berths can supply 16 in. reducers for loading cargo. Both seaward berths have a maximum depth of 106 ft.

For berthing at No. 15, vessel used 10 lines each end – 2 head/stern lines, 4 breasts and 2 springs. The ship is 330,000 d.w.t. We used 4 tugs, 1 each end on the hook and 2 pushing at the side. I feel Mariners could be warned that these tugs have very heavy wires which takes time and plenty of men to handle.

We also found that we needed 3 Crew Lists.

Ships cannot be berthed if the wind is N.W'ly over 20 knots.

C. KHEMCO TERMINAL: (Additional requirements and details)

OPERATOR: Kharg Chemical Company, Ltd. (Khemco), Tehran, Iran. Cable Address "Chemkharg" Tehran. Telex: 2402 Khemco Tn.

LOCATION: Khemco Terminal dolphin jetty is located at the S.E. corner of Kharg Island 29° 12′ 45″ N. 50° 20′ 05″ E.

APPROACHES: Vessels entering Kharg Island Roads must not approach or anchor West of Long. 50° 21′ 30″ E. (being approximately 1 mile East of Khemco Terminal), unless a company's Berthing Master is on board.

PILOTAGE: Company has own Berthing Masters, who will board vessels outside the port area and will pilot and berth the vessel alongside Khemco jetty. Berthing Masters will also carry out the duties of safety officer.

Vessels with the Berthing Master on board shall display the international flag "H" in a prominent position while manoeuvring under his advice. This flag will be in addition to the "Q" flag, being already hoisted for quarantine purposes.

Vessels are requested to have a clean pilot ladder safely secured on the leeside of the ship for the Berthing Master. The pilot ladder should be long enough to reach the pilot tug or launch. At night adequate lighting for the pilot ladder shall be installed.

Pilotage, berthing, mooring and sailing of vessels will be carried out in accordance with instructions of the Mooring Masters, subject to the understanding that in all circumstances the Master of the vessel being manoeuvred shall remain solely responsible for the safety, proper navigation and manoeuvring of his vessel. The Master or a qualified ship's deck officer must be on the bridge at all times while the vessel is underway or unmoored.

NOTICE OF READINESS: Notice of readiness will not be accepted at the time of arrival unless the vessel is in all respects ready to load. Arrival time will be considered as the time the berthing Master boards the vessel or the time that the vessel anchors, whichever occurs first.

RESTRICTIONS: Vessels can be berthed day or night in 2 directions using ship's moorings. Occasionally bow anchor will be used during berthing operation.

MAX. SIZE: Length of pier is 1180 ft. with maximum of 42 ft. water alongside at MLLW.

RADIO: The OSCO main radio station at Abadan will handle Khemco's radio traffic. The station call sign is EQZ. Messages for Khemco should be prefixed with "Khargiran Khemco", with copy to Agent.

Advice of Arrival: It is important that ships establish radio contact with Khemco, when 3 days distance from Kharg Island, and maintain this contact until just prior to arrival at the terminal. All ships should send a 72 hours ETA message to Khemco, giving the best estimate of the ship's arrival time at Kharg anchorage. The first ETA message should also include a definite statement of the details of manifold dimensions, cargo requirement, Agent and any other necessary information. Further ETA messages should be sent to Khemco when the vessel is 24 hours and 12 hours distant from Kharg Island and at any other time if any appreciable change occurs in the original ETA or those subsequent thereto. The 12 hour ETA should include a positive statement regarding ship's readiness to load on arrival, and the number of hours required to discharge clean ballast after ship has berthed.

TUGS: Two 2,000 h.p. and one 1,000 h.p. diesel tugs are provided by the Company. Normally 2 tugs are used for berthing and 1 for unberthing, depending on the Berthing Master's discretion. Tugs moorings are provided by the company and vessels are requested to have good heaving lines handy on the deck for picking up the tug lines. All tugs are equipped with fire-fighting equipment, including a foam system, which can be used when required.

MOORING: If, in the opinion of the Berthing Master, the vessel is not equipped with adequate mooring facilities, lines or gear, he will so inform vessel's Master, and in such event shall not be brought into berth until such facilities, lines or gear are deemed satisfactory.

Mooring Launches. 4 powerful mooring launches are provided by the Company and normally 1 is used during berthing and unberthing operations.

Mooring Lines. Under normal weather conditions the following mooring lines are required: forward: 3 head lines, 2 breast lines, 1 spring; aft.: 3 stern lines, 2 breast lines, 1 spring.

All lines to be of 120 fathoms, with the exception of the breast lines, being of shorter length. No wire lines are to be used at Khemco jetty.

During abnormal conditions, especially during Winter periods, some additional 4 lines are required for extra moorings.

In most cases it might be necessary to pass all forward lines from the bow and all stern lines from the poop.

Dolphins. The jetty consists of 1 main and 8 smaller dolphins. 4 on either side of the main dolphin are for ships mooring. The main dolphin is connected to the shore via a trestle and causeway. Head and stern lines are passed to the dolphins by means of line handling launches and others by heaving lines. All mooring dolphins are fitted with quick-release hooks.

BERTHING: A. Berthing Masters. Vessels to be berthed at Khemco jetty will be boarded by a company's Berthing Master at Kharg anchorage and after advising the ship's Master of all port formalities, will normally take 2 tugs (1 to the bow and 1 to the stern), alongside while proceeding to the jetty.

B. Berth Turn. Vessels to load at Khemco jetty will normally be accepted and the berth will be assigned to the vessel in order of arrival and nomination. In the event the berthing is delayed by weather or other reasons, vessels will keep their positions in line. Vessels leaving the port area on account of weather or other reasons should keep in contact with the terminal in order that they will be available when weather moderates. Khemco reserves the right to load vessels out of turn following the return of good weather, to the extent that such loading out of turn does not materially delay the loading of other vessels in line. For example, in the event that weather or other reasons make it necessary for vessels awaiting berth to leave the terminal and put to sea, Khemco may load another vessel after the port opens, but before the return of the vessels waiting in line ahead of it. And further, Khemco reserves the right to decline to berth a specific vessel if its condition or facilities are unsafe for berthing or loading, but berths other vessels "out of turn".

C. Gangway. When alongside the jetty, vessels shall provide an efficient gangway with a net rigged underneath. During the hours of darkness, they shall install adequate safe lighting for the gangway. These lights are in addition to those used for the deck illumination.

D. Sailing. All lines are dropped by means of quick-release hooks, fitted on all dolphins and under normal conditions 1 tug is used on the hook at the bow of the vessel in order to clear her off the berth. Usually the documents are signed before departure, unless the berth is needed for another ship.

BALLAST: A. Rules and Regulations. Vessels arriving at Kharg should maintain a reasonable draft fore and aft for safe manoeuvring and berthing. When conditions permit, the Berthing Master will advise the Master to commence discharging ballast. It is the Master's responsibility to see that dirty ballast, whatsoever, is not pumped or spilled overboard. Only clean ballast or bilge water may be discharged within 50 miles of the coast-line. In the event of contaminated ballast or bilge water, the vessel will be required to divert this material to a ship's slop tank. Otherwise, the vessel may be unberthed and returned to a point not less than 50 miles from the coast line to discharge contaminated ballast.

There are no ballast disposal facilities at Kharg Island.

Masters are requested to arrive at Kharg with clean tanks, pipelines, sea suctions, strainers and pumps. Ships will not be accepted for loading if evidence of any dirty ballast is observed.

Any vessel returned to a position at least 50 miles off-shore to discharge dirty ballast, or for any similar reason, automatically nullifies any "Notice of Readiness" already tendered and loses any priority held for loading. The vessel will be entered for loading at the time of second arrival when a new "Notice of Readiness" will be tendered.

B. Loading and Deballasting Simultaneously. Vessels are permitted to load cargo and discharge clean ballast at the same time provided all safety and other aspects are observed.

C. Tank Cleaning. Ship-tank cleaning will not be allowed at the pier. Ships will be allowed to draw sea water ballast while alongside.

LOADING: A. Ship's Gear. Although the jetty is equipped with a boom to handle loading hoses, ships are requested to rig jetty side boom in a proper and safe manner for possible use. Masters will be responsible for ensuring that the ships gear or fittings are in good working order and will not in any way interfere with or hamper the working of the facilities.

B. Inspection. After the vessel has been berthed and all formalities carried out the vessel will be boarded by the loading Master. A joint inspection will be made by an authorised ship's officer and the loading Master after the exchange of information and documents. If the ship's tanks, piping or equipment are in such condition that a potential hazard exists, the ships will be refused permission to load until such hazards are corrected. In any case, the owners or charterers of the ship will be notified of any delay or refusal to load because of hazardous conditions and any expense due to such delay or refusal to load will be borne by owners.

If the ship does not arrive with tanks and/or piping sufficiently cooled to permit loading, the time required to cool down shall not be counted as lay time. Any expenses, including LPG furnished by company, demurrage, etc., involved with the cool-down period and operation shall be borne by the owners or charterers of the vessel.

Should the vessel arrive at the loading terminal with inert gas in its tanks, after purging from a previous cargo of ammonia or other gas to prevent contamination of shore lines and facilities, the inert gas should be vented if possible before ship is moored. If the ship's tanks to be loaded previously contained a product different from what is to be loaded, the Master shall verify that the tanks are clean and ready to receive Kharg Chemical cargo.

C. Loading Propane and/or Butane. 1. General Information. No loading will begin until the ship is safely moored with fibre mooring lines, gangway lowered and secured, the ship grounded and ground tested, ship's and shore emergency fire hose pressurised and ready for use, fire wire in place, and ship/shore communications tested and in good working order.

All loading personnel will wear fibreglass hard hats, leather-palmed gloves, cotton long-sleeved shirts, long cotton trousers, cotton socks, and sandals or shoes that do not have spark-generating material, such as steel nails, cleats, toe or heel plates. Non-sparking tools will be used in making hose and ground connections. Silk clothing or headgear will not be permitted due to its affinity for collecting static electricity. Ship's grounds will be tested for continuity to shore before product or vapours pass through hoses.

Since the LPG may not contain an odorant, particular care shall be taken that the atmosphere does not become explosive. If there is no air movement, explosimeter readings will be taken hourly, and if an explosive atmosphere exists, loading shall stop until conditions change. Prior to loading the main cargo a small quantity of propane and/or butane will be loaded or circulated initially for cooling down purposes. The amount set aside for cooling down will depend on whether the cool down is for the ship's lines or ship's tanks. Generally, the ship's lines will be cooled down before loading each parcel.

Although a small amount of refrigerated LPG is normally retained in the bottoms of the ship's cargo tank during the trip to Kharg Island, the tank vapour space and tank walls are warmer. For a period of about an hour while low temperature circulation of the shore lines continues, a small amount of propane may be taken by the ship from cargo holds and sprayed into ship's tanks. This method cools the upper parts of the ship's tanks and vapour spaces. If propane is taken from shore lines, this is replaced from shore tankage as the circulating pump suction is "floating" on the shore tank outlet line.

The enclosed spaces around ship cargo tanks and double bulkheads should be frequently monitored by ship's personnel for cargo leakage.

The measures for dealing with any leakage to prevent the temperature of the hull structure from falling below a safe level depends upon the ship's design. The Master shall have standing orders for dealing with any leakage observed on the ship and shall so inform the Loading Master.

2. Loading Master and Jetty Operator. Once the vessel has been berthed, berth will be manned at all times by an operator, who will be stationed in the immediate vicinity of the berth loading bay. All information and forms will be passed by the Loading Master prior to commencement of loading.

3. Alarms. All alarm systems on vessel and communications between the jetty and control room shall be checked before loading is begun. Masters are requested to make the Loading Master fully familiar with the vessel's alarm systems. Otherwise, confusion may occur between loading alarms and fire alarms.

4. Connecting Loading Hoses. The loading and vapour-return hoses will be well supported and laid along the pier. Each hose and hose valve will be supported by jacks on ship's deck. Hoses will be protected by rope mesh. Once the loading hoses are connected they will be adjusted during loading operations. The shore and ship personnel shall be careful not to kink, stretch or damage hoses. Hoses not used will be blanked. Hose flanges will be completely bolted and shrouded.

Size of Hoses; propane 8 in. (with 8 in. ASA 150 flanges); butane 8 in. (with 8 in. ASA 150 flanges); vapour 6 in. (6 in. ASA flanges).

5. Air. It is most important that no air is allowed to enter either the ship or shore loading lines. All hoses and spools must be purged free of air after being connected.

Provision is made on shore for purging air from LPG and vent hoses on completion of hose connection to ship and for purging LPG vapour from hoses before disconnecting when loading is finished. Provision is made to supply inert gas for this purpose. Provision is also made for disposal of remaining liquid in hoses safely and effectively from shore connection of hoses before disconnecting and gas purging of hoses when loading is finished. Valves and connections are provided for this purpose on the shore end. All ice must be removed from around hose insulating gasket prior to hose disconnection. Cargo hoses shall be blanked and be removed from ship. Ground wires will remain connected until ship's gangway is removed and ship is ready to depart.

6. Loading Pressure. Loading pressure should not exceed 50 psi at any time.

7. Ship's Compressor. During loading, the ship may pump vapours ashore via the ship's compressor. The Loading Master should be advised before the compressor is started or stopped.

8. Loading Rates. Maximum loading rates for LPG products are as follows:

Propane (2 lines)	10,900 barrels per hour
Butane (2 lines)	7,800 ,, ,, ,,
Propane (1 line, pumping)	7,000 ,, ,, ,,
Butane (1 line gravitating)	3,900 ,, ,, ,,

It is more important that the Loading Master be informed before any changes are made by the ship in the vapour compression operation. He then will inform the shore loading area. Starting and stopping compressors on the ship affect the shore tank pressures and can result in damage to tanks and pumps. Ship's valves should under no circumstances be partially or completely closed against LPG flow without first informing the Loading Master. Pumping rates will normally be adjusted from the shore loading area.

The ship's Master is responsible for his ship at all times. The company Loading Master will advise the Master in respect to loading pressures and hazards, but will not direct the loading except as may be necessary to protect their terminal's facilities or to prevent any hazards. Manipulation of ship's valves is the direct responsibility of ship's personnel.

LPG loading will be done on a 24-hours basis; hence the Master of the vessel, while alongside the LPG loading pier, will be responsible for the provision of adequate explosion proof lights, fittings and switches in all parts of the vessel where work is being carried out in any way connected with loading of LPG.

The ship's pipe-lines/vent system and/or liquification system shall be manifolded so that only those pipe-lines connected to the ship's tank being loaded will be open. All other pipe-lines' lines shall be closed and outlets blinded.

All doorways, vents, ports, air-conditioner intakes and other openings into which gaseous vapours could enter shall be closed.

During loading, there shall be no smoking, no open lights and no galley fire on the ship or in the vicinity of the pier.

Packaged goods, bunkers, water, freight and ship stores shall not be loaded or discharged during loading. Visitors will not be permitted on the ship during loading.

Loading of LPG shall be stopped whenever weather or sea conditions are hazardous to the ship, dolphins, LPG hose and manifold, adjacent vessels or personnel. The Senior Terminal Representative and authorised Ship's Officer shall jointly judge if such conditions exist. In case of dispute, the Senior Terminal Representative's judgement shall be followed.

During severe thunder storms, sand storms and electrical storms in the vicinity of the ship, loading shall cease until the storm subsides.

9. Strainer Boxes. It is important that no ice, pipe scale, etc., be allowed into the vessels' tanks. The ship should have strainers placed immediately upstream of the manifold valves. A careful watch must be kept on the pressure to prevent the strainers being blocked and periodically the strainers should be cleaned by using the built-in wiper, which should be turned clockwise only. In case of an absolute blockage loading will have to be suspended and the strainer cleaned, if necessary by removal. If one of the vessel's strainers is blocked, it may be possible to continue on the other hose.

10. Completion of Loading. A reduction in loading rate before topping of the final tank or tanks may be arranged through the Loading Master by the ship's officer in charge. When the vessel asks for a slow rate, the loading pump will be shut-down and valves re-aligned for circulation. The vessel should then complete loading at its own controlled rate off the circulation flow. The terminal might ask for a suspension of loading while re-aligning the circulation pump. When required to stop completely, the Loading Master should be advised.

11. Hose Disconnection. When disconnecting hoses in order to change or clean a strainer at the time of completion of loading, the following points must be remembered:

(a) All ice must be removed from around the hose insulating gaskets prior to disconnecting.

(b) The hoses and hose valves must be secured to the vessel to avoid slipping or twisting. This is best done with rope and/or pulleys.

(c) The hose valves and ship's manifold valves must be shut.

(d) The vessel's vent valves must be open either to the atmosphere or to the vapour return hoses.

(e) The ship's strainer and all pipes and flanges between the hose and manifold valves must be de-iced.

(f) The hose can then be disconnected, but the ship's manifold valves, vapour return valves and hose valves must be shut.

D. Loading of Bulk Sulphur. All rules and regulations concerning LPG loading also apply to sulphur.

1. Inspection. The joint inspection of the ship and the ship's holds to be loaded with sulphur will be made by the Loading Master and authorised ship's officer. If the condition of the ship's holds presents a potential hazard to personnel, sea or shore facilities, the ship will be refused permission to load until conditions are corrected. The Master shall bear the responsibility for notifying the owners or charterers of the ship of any delay or refusal to load because of hazardous conditions and any expenses due to such delay or refusal to load shall be borne by them. The company reserves the right to refuse loading and their decision is final.

If the ship's cargo holds are not clean or are so hot and/or contain residue (such as excessive rust, sand-scrap iron, minerals, or mineral dust) that alone or in combination with sulphur or sulphur dust would contaminate sulphur being loaded, oxidise with sulphur, or cause a fire or explosion of the sulphur cargo, permission to load sulphur will be withheld until this condition is corrected.

2. General Information. Bulk Sulphur is loaded at 500 t.p.h. via a conveyor. The conveyor extends from the shore storage area along the causeway, trestle and finally to the main dolphin close to the ship's holds.

No loading will begin until the ship is safely grounded, moored with fibre lines, fire hoses pressurised, ship-to-shore communications operable and the chute grounded.

In order to minimise movement of fine sulphur dust, cowl ventilators serving hold into which sulphur is being loaded shall be blanked off to prevent circulation of air. Package goods, bunkers, water, freight, ship stores shall not be loaded or discharged during or after sulphur loading.

When sulphur is loaded in a deep hold with general cargo in the tween deck hold above the sulphur, the ship's Master will be responsible for installing a dust proof wooden bulk head enclosure in the hatchways from the over deck of the lower hold to the weather deck forming a tight enclosure to prevent sulphur dust from entering the tween decks during loading. Ceilings shall be tight to prevent sulphur dust from entering bilges. Any chinking at tank tops or bilge will be of non-combustible material.

Masters to maintain sufficient personnel to adjust and maintain chute position, gangways and keep mooring lines taut as ship is loaded.

If sulphur is loaded into a hatch already containing sulphur, representative samples may be requested by the terminal to determine quality.

Since the sulphur loading facility at the pier is fixed the ship will be warped and moored so that various ships holds that will receive sulphur can be loaded.

After each warping the ship will be moored and grounded and chute grounded. The hold to be loaded will be checked with an explosimeter to be certain that the hold is not in the explosive range. Personnel entering cargo holds for inspection must be equipped with life-lines and belts with non-sparking hardware, goggles with green tinted lenses, and self-contained breathing apparatus with a mask covering eyes and nose. The life-lines shall be of sufficient length and strength that 1 line could be used to pull a man out of a hatch. For each man working in the hold 1 man on deck must attend his life-lines. Personnel in the hold must wear gauntlet gloves, high-top shoes, long cotton socks, a fibre glass hard hat with a cotton cap ear flaps covering the head and ears, pants fastened at the cuff and long-sleeve shirts buttoned at the neck and wrists. Silk clothing or headgear will not be permitted due to its affinity for collecting static. Cotton clothing material is preferred.

Only the hatch being loaded with sulphur will be open. All other ship hold hatches must be closed. All doorways, vents, ports, air scoops, air conditioner intakes and other openings into which sulphur dust could enter should be closed during loading. After loading and trimming a hold, the hold hatch cover shall be closed and the next hatch to receive sulphur will be opened. The pier sulphur loading tower can be raised and lowered as well as rotated in order that the cargo hold being loaded can be evenly trimmed with little or no manual trimming. Each time the tower is moved the chute shall be grounded. No hand cargo load trimming will be allowed while the pier loading sulphur tower is in operation. The tower down-spout drop distance will be adjusted to minimise sulphur dusting.

The loading-tower operator will be advised by authorised ship's personnel on the deck by use of agreed hand signals of any hazards such as deck cargo, life boats, aerial guy wires, etc., that can do damage to loading tower. Personnel will work upwind as much as possible to minimise sulphur dust inhalation or sulphur on skin. Eye baths and showers are located at the dock and will be ready for use if needed.

No loading will be done until all personnel are out of ship's cargo holds. The ship's authorised officer shall assign personnel to sweep sulphur dust into cargo holds to minimise pollution of the adjacent sea water. If shovels or scoops are used the shovels must be of a non-sparking material such as monel. Personnel working cargo holds or on deck shall not be permitted to wear shoes with steel nails, or metal heels or toe plates that could cause sparking.

Loading of sulphur will be stopped whenever weather or sea conditions are hazardous to the ship, pier, dolphins, sulphur loading tower, pier equipment, adjacent vessels or personnel.

Sulphur dust, like most poor electrical conductors rapidly acquires a static charge under dry atmospheric conditions. To minimise this hazard the loading tower is equipped with water spray nozzles to humidify the sulphur and reduce dusting. Conveyor hoppers are also equipped with sprays.

During severe weather conditions loading will cease and cargo hold hatches shall be closed until the storm or seas subside.

Sulphur loading will be done on a 24-hour basis. The Master of the vessel while alongside the sulphur loading pier will be responsible for the provision of adequate explosion proof lights, fittings and switches in all parts of the vessel where work is being carried out in any way connected with loading. The Master of the vessel will assign authorised ship's officers and men as deemed necessary for the safe loading of the ship and to adjust mooring lines and keep sulphur dusting to a minimum.

FUEL: Presently no bunker facilities are available at Khemco jetty. However, 2 grades (marine fuel oil and marine diesel oil) are available at OSCO main jetty. This is supplied to vessels having made previous arrangements and obtained nomination.

WEATHER: A. Climate. The climate along the coast of Kharg Island is generally mild. The days in mid-Summer are extremely warm and humid with the temperature reaching 117°F. (47°C.) and a relative humidity ranging from 10% to 98%. The Winter months, from November to March, are pleasant with a minimum temperature of about 39°F. (4°C.). Freezing weather is uncommon.

B. Weather Data and Summary.

Average annual rainfall	8 in.
Mean maximum temperature	87°F.
Mean minimum temperature	66°F.
Extreme maximum temperature	117°F.
Extreme minimum temperature	39°F.
Average relative humidity	59%

C. Winds. Wind directions and velocity are subject to rapid change without warning and precautions are necessary to avoid difficulties. The heaviest seas and swells are from the N.E. through S.E. The prevailing wind for most of the year is from the N.W., but during the Winter period strong S.E. storms occur with very little warning. The Khemco jetty is sheltered from the N.W. winds.

D. Tides. The tidal range is between 7 and 8 ft., with a maximum rate of about 1.5 knots. The tidal streams run approximately parallel to the line of the jetty, with occasional cross currents.

E. Sea Temperatures. The surface temperature of the sea ranges from 63°F. to 97°F., depending on the season.

SAFETY: Masters of vessels are responsible for the safety of their vessels including, but not limited to compliance with official precautions, and must take all necessary precautions while the vessels are alongside the Khemco jetty. While the vessels are alongside the jetty, all personnel must comply with all port's safety rules and regulations.

GENERAL: *(a)* Shore Leave. Shore leave at the terminal must be arranged between Master and ship's Agent. Sufficient personnel must be on board at all times for emergencies.

(b) Visitors. Due to hazards involved, no visitors are allowed while the vessel is alongside the Khemco jetty.

(c) Light Dues. A charge of half a Rial per g.r.t. is levied on each vessel for light dues by the Iranian Government. This is in addition to light dues for Middle East Navigation Service. The company shall have no responsibility in respect of any taxes, dues, or other charges levied by the Iranian Government or any of its departments or agencies.

(d) Painting and Scaling. Painting, chipping, scaling and any repairs on deck or overside is strictly prohibited while vessel is alongside the Khemco jetty.

(e) Garbage. Dumping of garbage and refuse strictly prohibited in port area.

(f) Repairs. No workshops or other facilities for repairs at Kharg Island.

(g) Customs. There are customs and other official offices on the Island. Vessel will normally be boarded by a custom director, immigration officer and director of Ports and Shipping.

(h) Consulates. No consulates on Kharg Island. Nearest consulates or diplomatic representatives are at Khorramshahr.

(i) Marine Surveyor. No marine surveyor on the Island, but can be available at 48 hours notice through ship's Agent.

(j) Recreation Centre. Use of Seamen's Club will be cleared through NIOC and Consortium. If used, transportation to and from Club will be provided by the Agent.

(k) Supplies. No provision of any kind is available at Kharg Island. No fresh water is available for delivery to the ships. No laundry services are available at Kharg Island.

(l) Mail. Regular plane services between Kharg Island and the mainland and mail receiving and dispatching can be arranged through ship's Agent.

AGENTS: Gulf Agency Co. (Iran) Ltd., POB 110, Khorramshahr, Iran. Tel. 2280, 2278, 4755/58. Cables: "Confidence", Khorramshahr. Telex. 654033, 654000, 654051 (answerback: "GAC IR").

If difficulty is experienced in reaching Khorramshahr with international telex messages recommend you communicate via Tehran office, Telex No. 212507, 212856, 213043 and 213044. Tehran, (answerback: "GAC IR"), stating in your message "For Khorramshahr".

Recommend that all urgent communications be sent by cable directly to Khorramshahr.

Ships' mail and spare-parts for vessels calling at Khemco Terminal are to be routed by flights arriving directly to Abadan Airport without transhipment at Tehran, and addressed to: Gulf Agency Co. (Iran) Ltd., POB 62, Abadan, Iran.

KHORRAMSHAHR: 30.26 N. 48.10 E.

Khorramshahr lies at confluence of Karoon and Shatt-el-Arab Rivers and is principal commercial port of Iran. Khorramshahr is terminus for Iranian Railway system and regular train service to rest of country is available. Good asphalt road connecting Khorramshahr to other major cities in country.

DOCUMENTS:

(a) Iraqi Quarantine Officer. Vessels arriving Outer Bar (Shatt-el-Arab Pilot station) will be boarded by Iraqi Quarantine Officer who will check all crew vaccination cards. Masters requested notify Fao Quarantine Office at least 18 hours prior vessel's arrival Outer Bar giving exact arrival time Outer Bar enabling Quarantine personnel board vessel immediately. Upon arrival Outer Bar, Master should have ready a copy of Crew List and crew vaccination certificates for presentation to Quarantine Officer.

(b) Iranian Quarantine Officer. Upon arrival Khorramshahr anchorage and prior berthing, the Iranian Quarantine Officer will board vessel. He requires 1 copy Crew List, and all vaccination cards should be available for inspection.

(c) Customs Officer. Customs officer boards ship at anchorage or alongside Khorramshahr jetty (in case of immediate berthing) and requires following documents:

Crew List (2 copies).
Stores List (2 copies).

(d) Port Authorities.

Crew List plus (1 copy).

Arrival information form of the port Administration will be supplied to the Master in duplicate upon arrival, by a port representative. This form should be filled in and returned to the port Berthing Master.

(e) Agents.

Crew List (2 copies, for arranging shore passes).

Order avoid any delay in entering and discharging, the following documents must be sent by all loading port Agents to Khorramshahr Agents as far in advance of vessel's arrival as possible:

Cargo Manifest (6 copies).
Freight Manifest (2 copies).
B/L Copies (2 copies each).

All cargo shown on manifest must be landed at the port, and it is therefore essential that short-shipments, cancellations, diversions etc. (if any) be reported early as possible and manifest should be corrected before submission to Port Authorities to avoid payment of fines. Stowage plans and hatch Lists should also be sent ahead, giving ample time to be studied by Cargo Supervisor for unloading arrangements.

PILOTAGE: With exception of ships of Government of Iran or Iraq and sailing craft, pilotage compulsory for all vessels entering, leaving or navigating in the Shatt-el-Arab. Pilotage in river outside harbour limits of Khorramshahr conducted by River pilot; within limits of Port by Harbour Master.

Vessels entering Shatt-el-Arab boarded by river Pilot from Pilot vessel situated in proximity of Rooka Buoy (29° 49′ N. and 48° 47′ E.), showing a white flash every 6 seconds and equipped with Radar Reflector.

Vessels bound for Khorramshahr are conducted by River Pilot as far as Khorramshahr Anchorage, from where a Harbour Master (Iranian) will board vessel and berth her as necessary.

Pilotage, dredging and other navigational dues are collected by Basrah Port Authorities and must be settled directly with Iraqi Maritime Transport Co. Ltd., Basrah, Iraq.

N.B. Owners having vessels bound for Khorramshahr or Abadan should contact Iraqi Maritime Transport Co. Ltd., Basrah, cables "Bawakhir", Basrah, about arranging of Shatt-el-Arab pilotage. Owners should also put Messrs. Iraqi Maritime Transport Co. Ltd. in funds by remittance well in time before vessel reaches the Outer Bar of Shatt-el-Arab in order to cover port tonnage dues, pilotage and dredging dues for sailing from Outer Bar to Abadan or Khorramshahr and return.

ANCHORAGES: On arrival off the pilot boat vessel can anchor with no depth restriction. On entering the Shatt-el-Arab River the following are the recognised anchorages:

Kasba Anchorage, position about 2 miles above Fao with a max. depth of 35 ft. in fresh water.

Bawarda Anchorage, position about 2 miles above Abadan with a max. depth of 31 ft. in fresh water.

Hartha Point, position about 20 miles above Abadan and 15 miles below Khorramshahr with a max. depth of 35 ft. in fresh water. Hartha Point is the anchorage to enable vessels to lighten to 29 ft. in fresh water to enable them to cross the Karun Bar.

Abu Flus, position about 16 miles above Hartha Point and about 14 miles below Basrah (Khora Anchorage) with a max. depth of 29 ft. in fresh water.

MAX. SIZE: Maximum permissible length for vessels calling Khorramshahr is 525 ft. max. draft for crossing Karun Bar and also at Khorramshahr (Failieth) anchorage is 29 ft., fresh water. Max. draft at Karun Bar in December 1976 was 26 ft. so it is advisable to check before vessel proceeds to the port. The depth alongside Berth Nos. 1 to 3 is 27 ft., Berth Nos. 4 to 7 is 26 ft., and Berth Nos. 8 and 9 is 29 ft.

SPEED RESTRICTIONS: Engine speed must be reduced well in advance so that the vessel's speed when passing jetties at Khorramshahr and Abadan will not exceed 3.5 knots for vessels with more than 20 ft. draft, and 5 knots for all other vessels of over 100 g.r.t.

The same speed restrictions will apply in the Shatt-el-Arab when passing ships at anchor with barges or other vessels moored alongside, tugs with barges or other vessels in tow, and vessels engaged in dredging or other salvage work.

SHIP'S REGISTRATION: Ships have to register upon arrival at outer bar by sending telegram to Port Director Khorramshahr via EQK Khorramshahr Port Radio. At present the vessel, after registering her turn should wait at outer bar. If vessel proceeds to another port for discharging, her registration will not be valid. Vessel after registration of berthing turn for Khorramshahr can however call at Abadan Port during waiting period without losing her turn.

HEALTH: See "Documents". Inward clearance is effected on board after receiving free pratique.

RADIO: Khorramshahr Port Radio, call sign EQK, 500 kHz, 2182 mHz.

Khorramshahr Harbour Master can be contacted on VHF Channels 13 and 16, 18 and 25.

Vessels destined for Khorramshahr should send a radio message to the Port Director Khorramshahr and to the ship's Agent 24 hours prior arrival at the Shatt-el-Arab Pilot Station (Outer Bar). Times should be quoted in GMT. Also see "Ship's Registration".

TUGS: The Port Organisation of Khorramshahr owns 2 tug-boats which are used for assisting berthing and unberthing whenever necessary. No tug boats which could be used for long-distance towage. Employment of tug-boats is not compulsory.

BERTHING: See "Ship's Registration". Berthing and unberthing performed by Iranian Harbour Masters supplied by Iranian Port Administration, Khorramshahr. Berthing turn, allocation of berth and anchorage space is under the control of Iranian Port Administration, Khorramshahr.

The Port consists of 3,199 ft. long jetty constructed with wooden piles (Berths 1 to 7) plus the new extension covering 1,000 ft., built by steel/concrete piles (Berths 8 and 9) running parallel with river bank. Jetty can receive 9 ocean-going vessels at a time.

CARGO HANDLING: *(a) Jetty.* All cargo handling/operations on shore, under control of Khorramshahr Port Administration. General cargo discharged from ships alongside jetty is received on domestic railway wagons and trailers controlled by Port Administration, and transported to Port Warehouses or open yards. Port Warehouse/Store keepers will later deliver cargo to consignees against clearance papers issued by Customs. There are no shore cranes and no floating cranes available for the purpose of discharging cargo. All cargo must be discharged by ship's own gear, and vessels calling at Khorramshahr should not accept cargo beyond their gear capacity to discharge.

(b) Barges. (i) General Cargo: Vessels carrying less than 500 tons cargo are permitted to discharge their cargo into barges, in which case all extra expenses and costs of barging, discharging ex barges, etc., are to be borne by the carriers and such operation is entirely at the risk and responsibility of the respective carrier.

(ii) Structural Iron/Steel: Structural iron/steel is always to be discharged in barges for unloading at Failieh Creek. Barges must be arranged by vessel's Agents, who also have to arrange labour for discharging the cargo ex barge at Failieh, sorting of the iron, and delivery to consignees. Agents should also employ watchmen for protecting the cargo while awaiting delivery to consignees, also tally clerk for supervising sorting and delivery of iron to the respective consignees. Against these services Agents are presently collecting Rials 110 per ton of 1,000 kilos as a landing charge from the consignees. This rate has been agreed upon between the Agents and the Chamber of Commerce of Khorramshahr.

(c) Cranes. For use in loading/unloading cargo *in the storage areas,* cranes are all used in the port yard *for unloading cargo ex rail wagons* and loading on to merchants' trucks.

There is 1 electric crane permanently installed at Failieh Creek with lifting capacity said to be 100/120 tons. This crane can be used for discharging cargo from barges at Failieh barge jetty.

(d) Storage. 19 warehouses (goods sheds), plus an open yard between the warehouses used for storing iron goods, as well as cargoes which can be stored in the open.

(e) Wagons/Trailers. For receiving cargo ex-vessels alongside jetty the Authorities have 160 rail wagons and 77 trailers with average capacity of 10 tons, but number of wagons/trailers provided to each vessel not sufficient to last 24 hours work at jetty. Although 24-hours working alongside jetty is compulsory, due to shortage of wagons hardly 12/18 hours work can be accomplished efficiently. A stand-by of 6/7 hours in Summer and of 9/11 hours in Winter is unavoidable.

(f) Delivery of cargo discharged at jetty. Port Authorities considered as direct receivers of the cargo discharged, who in turn deliver same to ultimate consignees against presentation of the carrier's Agents' Delivery Order.

Carrier's responsibility for cargoes discharged in good condition cease under tackle; slings are opened by labourers provided on wagons alongside each vessel. Broken packages are not permitted (by Customs) to be discharged on the wagons, and are therefore collected on board. Once daily, under full control of ship's officer, port supervisor and carrier's supervisor, the broken packages are delivered to Port Authorities and an official Process-verbal will be drawn by respective warehouse-keeper corresponding to remarks noted at the time. This arrangement is to prevent any delay to operations of the vessel.

(g) Overtime Costs. Wages of port staff on board for official hours are borne by port Authorities but overtime and food allowance are paid by carriers.

(h) Port Working Hours (Ordinary). Summer 0600 to 1400 hrs.; 1700 to 0100 hrs.; Winter 0700 to 1500 hrs.; 1700 to 0100 hrs. (Overtime) 0100 to 0500 hrs.

24 hour discharging at jetty is compulsory. The only stoppages are for lunch and dinner, 1 hour each. In Summer season, however, due to heat, discharging at jetty is stopped from 1400 to 1700 hrs.

(i) Liquid Cargo. Due to non availability of tank barges as well as storage area at Bandar Shahpour, vessels carrying liquid cargo are bound to call at Khorramshahr, where consignees have their own tank-barges and storage tanks. This being the case, the Port Authorities do not divert vessels carrying liquid cargo, to Bandar Shahpour.

In the port of Khorramshahr, importers of vegetable oil and other liquid commodities, have arranged their own storage area outside Customs yard, and liquid consignments will be received directly ex-vessel into consignees' barges without any expenses to carrier. (Discharging performed at anchorage.)

Vessels carrying part-liquid cargo can discharge their cargo while awaiting a berth or alongside jetty, whilst unloading other cargo on the pier.

Further to above, whenever Port Authorities divert any vessel to Bandar Shahpour, in the diversion order they indicate "Subject no liquid cargo on board", as vessels with liquid cargo will have to be accepted in the port of Khorramshahr.

Notice of Readiness for vessels carrying liquid cargo, has to be tendered after vessel has anchored at Khorramshahr anchorage (within Khorramshahr port limits). If, due to congestion, there is no space at Khorramshahr anchorage, vessels may have to remain at Arvandrud Pilot station for 1 or 2 days before entering the river.

(j) Dangerous Cargo. Dangerous cargoes are divided in two categories:

1. Acid and flammable cargoes.
2. Explosives such as dynamite, etc.

Vessels carrying acid and flammable cargoes are accepted alongside Khorramshahr berths to unload their general cargo plus dangerous cargo, and Port Authorities unload the dangerous cargo in a yard at Failieh, which yard is mainly used for storing iron joists, but a part is allocated for dangerous cargo.

Vessels carrying explosives are not allowed to berth at Khorramshahr. Recently the Port Authorities have stopped accepting any vessel with explosive cargo on board into the port of Khorramshahr, and those vessels have to proceed directly to Bandar Shahpour before calling Khorramshahr for discharging general cargo, if any. The main port for discharging explosive and special cargoes consigned to Iranian Army is Bandar Shahpour, where the Army have an agreement with the Port Authorities for 1 berth out of the 6 berths. Berth No. 3 is allocated for vessels carrying cargo consigned to Iranian Army, and whenever such vessel arrives at Bandar Shahpour it will be berthed immediately, even if the port is congested; in other words, vessels with Army cargo have priority for berthing.

FREIGHT TAX: Freight tax is payable on any freight earned in Iran for any export cargo loaded at any Iranian port. Per article 90 of Tax Law, freight tax is payable at the rate of 5 per cent on gross freight, regardless of whether freight is collected in Iran or elsewhere. There is no tax on import cargo freight regardless of where the freight is paid. In other words, for cargo discharged in Iranian ports, even if freight is payable at destination to be collected in Iran, there is no tax applicable.

MEDICAL: Private doctors and hospitals located in the town for medical and dental treatment and hospitalisation. Arrangements for patients' visits to the doctors, dentists and hospital will be made by Agents upon request. In case of emergency special medical attendance on board can also be arranged. X-Rays, radiographies, blood and urine tests can also be conducted by equipped hospitals existing in Khorramshahr and Abadan.

DENSITY: Fresh.

FRESH WATER: Fresh water supply alongside berth available by pipe-lines and at anchorage by barges, capacity 100 tons.

FUEL: Bunkers are not available at Khorramshahr Jetty, and cannot be supplied by barge. All classes of bunkers are supplied at Abadan jetties only. Bunkers could be obtained from Abadan provided arrangement for supply has been made beforehand with Iranian Oil Participants, London (Iranop London).

CUSTOMS ALLOWANCES: After receipt of documents, the Customs Officer will seal the store room. All liquor and cigarette stocks will be sealed and reasonable ship's requirements while in port should be taken from store before sealing. This amount recommended to be assessed and be ready for removal from the stores prior to the vessel's arrival in port. During the stay at the port, and upon request and giving prior notice to the Agents' supervisor on board, arrangements may be made to have the Customs officials open the stores to issue further quantities of stores for crew consumption.

IDENTIFICATION CARDS: According to regulations in force seamen should hold shore pass issued by respective Agents and signed by the Port Health, Port Police and local town Police Authorities. All shore passes should bear a photo of the holder, in order to facilitate checking at exit of port area. It is therefore necessary for officers and crew to have a photograph ready on arrival at the port to facilitate obtaining shore passes.

All officers and crew of ships lying at jetties or anchorage of the Port of Khorramshahr to carry their Seamen's Books with them when going ashore. At the gate, the Seamen's Books will be checked by the Police against the shore pass of each crew member, the Seamen's Book will then be kept by the Police and will be returned to the holder when returning through the gate.

CONSULS:

Denmark	Tel. 2203	Norway	Tel. 2616
France	Tel. 3656	Sweden	Tel. 2280
India	Tel. 3056	U.S.A.	Tel. 2196
Netherlands	Tel. 3628		

REPAIRS: Minor repairs can be carried out to a limited extent by private workshops existing at Khorramshahr. However due to lack of skilled workers the workshops in question do not undertake any responsibility or guarantee for the jobs performed, and charges are high.

For radar, wireless, echo-sounders, etc. as well as refrigerator and air condition service there are a few engineering groups at Khorramshahr as well as Abadan, and technicians of these groups will attend to the repairs on board both at Khorramshahr and Abadan jetties or at anchorage, upon request.

Ships moored to the jetty are not permitted to disable main power-plants for repairs without prior approval of Marine Department. A port tug will be assigned to stand by alongside ship with tow line attached during entire period while plant is disabled.

DRY DOCKS: None.

SURVEYORS: Lloyd's Register; Det Norsk Veritas; Bureau Veritas. Surveyors for ordinary damage to cargo and/or ship as well as for on-hire/off-hire survey can be arranged by Agents.

AIRPORT: Abadan International Airport about 10 minutes by car.

TIME: GMT plus 3.5 hours.

TELEPHONES: May be placed on board.

SHORE LEAVE: See "Identification Cards".

DELAYS: The port of Khorramshahr is generally congested, with a waiting time of about 2/5 days. Port Administration sometimes orders vessels to discharge their Khorramshahr manifested cargo in Bandar Shahpour to ease the congestion at Khorramshahr.

PROVISIONS: Fresh provisions in limited quantity can be obtained but large quantities of provisions sometimes may not be possible to arrange due to the fact that the Municipality is controlling the market and sometimes may prohibit the supply of the items which are in short supply. Due to certain formalities involved in supplying provisions to vessels, it is requested that 24-hour notice be given to the shipchandler.

STORES: Local commodities only available. Bonded stores not available.

LAUNDRY: Laundryman can be arranged upon request.

DEVELOPMENTS: As additions to the existing 9 jetties, 4 new jetties are under construction suitable for vessels of up to 10,000 d.w.t. Length of jetties will be 720 m., and construction will include sheds of 20,000 sq.m. and an open area of 31,500 sq.m.

In the Failieh Canal, where steel cargo is discharged from barges, the existing jetty has been extended 500 m. This jetty can accommodate 15 barges, and has an open area of 15,000 sq.m. Construction of the extension has been completed, and dredging is taking place to increase the depth available to the barges.

AUTHORITY: Ports and Shipping Organisation. Tehran.

AGENTS: Gulf Agency Co. (Iran) Ltd., serving: Khorramshahr, Abadan, Bandar Shahpour, Bandar Mahshahr, Ras Bahregan, Kharg Island (Kharg, Darius and Cyrus Terminals), Bushire, Lavan Island and Bandar Abbas. Freight Booking Office: Tehran.

Head Office: Khorramshahr: Gulf Agency Co. (Iran) Ltd., POB 110, Khorramshahr, Iran. Cables: "Confidence", Khorramshahr. Tel. 2280, 2278, 4755/58; after office hours: 2670, 2950, 3193. Telex: 654033, 654000, 654051 (answerback "GAC IR").

Tehran office: Telex 212507, 212856, 213043 and 213044 (answerback: "GAC IR"). Please state: *"For Khorramshahr"*.

LAVAN ISLAND: 26.47 N. 53.20 E. (See Plan Book)

Lavan Island Loading Terminal. 26° 47′ 10″ N. 53° 20′ 30″ E.

Operators: Lavan Petroleum Co. ("LAPCO").

LOCATION: Lavan Island (shown on some charts and pilot publications as Sheikh Shuaib) lies on the North side of the Gulf about 6 miles from the mainland with Lavan Island Loading Terminal in Lat. 26° 47′ 06″ N., Long. 53° 20′ 30″ E., which is on the S.E. end of Lavan Island.

The island, roughly eliptical in shape, is about 13 miles in length, with a maximum width about 2 miles. It is light brown in colour and its Eastern and Western extremities are low but thence it rises to a number of hummocks having a maximum elevation of 180° on the West part. Crude oil is delivered from Sassan Oil Field to the terminal by a 22 in. diameter submarine pipe-line which runs seaward from the island on a bearing 188° from a position in Lat. 26° 47′ 32″ N., Long. 53° 20′ 05″ E. for a distance of 76 miles where it joins the Sassan Oil Field. The Company Flow Station and Pumping Station are located in position Lat. 25° 32′ 16″ N., Long. 53° 09′ 01″ E. in the close vicinity of which is a gas flare.

PORT LIMITS: Limits of port extend approximately 1 mile Westward from East coast of Lavan Island, from Terminal Sea Buoy to half a mile Westward from Sassan Submarine Pipe-line Buoy.

Lat. 26° 47.5′ N.	Long. 53° 22.0′ E.
Lat. 26° 46.4′ N.	Long. 53° 22.0′ E.
Lat. 26° 47.5′ N.	Long. 53° 19.4′ E.
Lat. 26° 46.8′ N.	Long. 53° 19.4′ E.

Vessels must not enter the Port Limits unless a LAPCO Mooring Master is on board.

DOCUMENTS:

5 Crew and Passenger Lists.
2 Stores Lists.
2 Bonded Stores Lists.
Clear Bill of Health from last port.
4 Bills of Lading.
6 Manifests.

In Iran, an additional copy of the Bill of Lading is required for all exports from the country. This must be signed by the Master and forwarded to the Customs Authorities, Lavan Island by the ship's Agent.

EARLY SAILING PROCEDURE:

Notice to Masters – Early Sailing Procedure:

In order to minimize delays to tankers awaiting official documentation after loading at Lavan Island, an Early Sailing System is now in force.

The following documents are prepared in advance, **except for cargo figures,** and presented by the ship's Agent to the Master for his signature upon the ship's arrival at the loading dock.

(A) Nos...... Originals & Nos...... Copies LAPCO/IMINOCO Bill of Lading.

(B) Nos...... Originals & Nos...... Copies LAPCO/IMINOCO Certificate of Origin and Cargo Manifest.

(C) Nos...... Originals & Nos...... Copies LAPCO IMINOCO Tanker Time and Loading Report.

(D) Nos...... Originals & Nos...... Copies LAPCO/IMINOCO Report of Cargo and Ship's Ullages.

(E) Masters Receipt for Documents covering both pre-signed and onsite prepared forms.

Documents for Master's use, and for the consignee care of the Master will be retained on board. All other pre-signed documents to be returned by the Agent to the LAPCO Terminal Office.

Official cargo figures will be passed to the Master by radio **within 1 hour** of his departure. Advice of quantities loaded should be inserted by the Master on the 'Bill of Lading' and 'Certificate of Origin' forms as prior indicated.

Hand written copies of items (C) and (D) will be passed to the Master for his reference.

In cases of disagreement on cargo figures, the Master may,

(1) 'Note Protest' by cable or telex.
(2) Authorise the ship's Agent to 'Note Protest' on his behalf.
(3) Pass a written 'Note of Protest' to the Berthing Master who will acknowledge receipt on behalf of the Terminal.

LAPCO appreciates the co-operation of Masters, Owners, Shippers and Consignees in agreeing to implement this system.

APPROACHES: Vessels approaching Lavan Island from due South will have a clear approach.

(a) Landfall. There are 5 gas flare towers and 1 ground flare. The most conspicuous flare is in position Lat. 26° 47′ 34″ N., Long. 53° 20′ 39″ E. situated in the vicinity of Port Area. This flare onshore, when burning, makes a conspicuous landfall for Lavan Island, but at night from a distance tends to obliterate the various navigational lights.

The other flares are in position,

Lat. 26° 47′ 41″ N.,	Long. 53° 20′ 19″ E.
Lat. 26° 48′ 25″ N.,	Long. 53° 20′ 03″ E.

(group of 3 flares).

All tanks in the LAPCO Terminal Tank Farm are painted white. The two front tanks have the word LAPCO painted in black on the South side. Tank No. 2 is in position Lat. 26° 47′ 57″ N., Long. 53° 20′ 24″ E. A 1,000,000 bbls. tank has recently been constructed and added to the Tank Farm capacity. It is sited at the rear of the former 6×500,000 bbls. tanks.

(b) Navigational Dangers. South side of Island is open and free from dangers, but care should be exercised approaching from seaward as soundings shallow rapidly near coast with depths of 200 ft. only 4,500 ft. off shore.

PILOTAGE: Pilotage compulsory for vessels berthing on, or departing from Oil Jetty, and when manoeuvring in restricted area. Men-of-war do not require Pilots as they are accommodated in cargo anchorage. Vessels with LAPCO cargo will be moored at a buoy berth for which operation a LAPCO Berthing Master and tug are provided, without charge. Pilots provided automatically on arrival for tankers if berth available. If no berth available due to bad weather or other causes, vessels will be instructed accordingly. The normal international pilot signals are to be used.

Channel 16 VHF is to be used to call Radio Room. Pilots will normally board vessels 2 miles S.E. of Oil Loading Jetty. ETA is to be signalled 96 hours before arrival and confirmed, confirming ETA 48 hours before arrival.

Ships requested to have pilot ladder safely and securely rigged, and ready for immediate use, and long enough to reach Berthing Master's launch. A combination of pilot ladder and ship's accommodation ladder, so arranged that personnel can first use pilot ladder, until part way up the vessel's side, and then transfer to the accommodation ladder is recommended, especially on very large ships. A light line should be ready to take aboard Berthing Master's equipment. There should be adequate lighting at night. Vessels will provide a lee for Berthing Master both when boarding and leaving.

NAVIGATIONAL AIDS: *Note:* Masters are cautioned to consult their latest Notices to Mariners and Light Lists for most recent information regarding navigation aids.

Lavan Island Terminal Beacon. Lat. 26° 48′ 04″ N., Long., 53° 21′ 20″ E. Located behind the Main LAPCO Administration Building on the S.E. end of the Island, a rotating white light on a steel lattice tower, painted maroon, 182 ft. above MLWIS exhibiting 3 flashes every 12 seconds, with a visibility of 15 miles.

Pipe-line Lavan Island Rear Beacon. 26° 48′ 04″ N., 53° 20′ 12″ E. is located to West of Tank Farm on a steel lattice tower. This light displays a fixed red range light over a 10 degree sector beamed to seawards and centred along submarine pipe-line coming to Island from Sassan Oil Field. The light is 192 ft. above MLWIS, range 12 miles in clear weather.

Pipe-line Lavan Island Front Beacon. Lat. 26° 47′ 34″ N., Long. 53° 20′ 08″ E. and is located in a position 2,800 ft. bearing 176 degree from the rear beacon fixed on a steel lattice tower. This light displays a fixed red range light over a 10 degree sector beamed to seaward and centred along submarine pipe-line coming to Lavan Island from the Sassan Oil Field.

The light is 115 ft. above MLWIS and has a range of 12 miles in clear weather. The beacons when in transit from seaward, will indicate that the observer is over the submarine pipe-line and therefore should not anchor in the proximity of this line of bearing.

Sassan Oil Field Radio Beacon. Located in position 25° 32′ 12″ N., 53° 09′ E. Station indentification signal is LA transmitting on 397 kc/s sec., primarily meant as an aircraft beacon but can be received clearly by ships.

Terminal Radio Beacon. Located in position Lat. 26° 47′ 40″ N., Long. 53° 23′ 04″ E. Station identification signal is LD, transmitting 310 kc/s (kHz/sec) from a tower on the above location. This is primarily meant as an aircraft beacon, but can be received clearly by ships.

Light Float. This light float is on station with colour and characteristics as described.

Lat. 26° 47′ 00″ N., Long. 53° 23′ 14″ E. Located approximately 1.1 miles Southward of the Eastern extremity of Lavan Island. Painted red exhibiting a white group flashing light showing 2 flashes every 10 seconds.

Leading Lights – Oil Dock: Located in Lat. 26° 47′ 34.8″ N., Long. 53° 19′ 27.9″ E. Lat. 26° 47′ 30.8″ N., Long. 53° 19′ 35.0″ E. on a bearing of 302° T.

Characteristics, Front, Qk., Fl. R. 5 miles. Rear, Qk., Fl. W. 5 miles.

Leading Lights – Cargo mooring: Lat. 26° 47′ 39.0″ N., Long. 53° 22′ 32.3″ E. Lat. 26° 47′ 33.0″ N., Long. 53° 22′ 34.1″ E. on a bearing of 344° T.

Characteristics, Front, Qk., Fl. R. 5 miles. Rear, Qk., Fl. W. 5 miles.

Oil Loading Dock Lights. The N.W. and S.E. ends of the dock are marked by single fixed red navigation lights placed on Mooring dolphins Nos. 1 and 4, respectively.

Small Craft Harbour. There is a small craft harbour located in position Lat. 26° 47′ 33″ N., Long. 53° 23′ 13″ E. which has no navigational lights displayed.

Terminal Sea Buoy. Located in position Lat. 26° 46′ 30″ N., Long. 53° 22′ 07″ E. White can buoy with lattice tower, radar reflecting, characteristic 1 flash every 5 seconds (0.5 seconds on 4.6 seconds eclipse).

Sassan Submarine Trunk Pipe-line Buoy. Located in position Lat. 26° 46′ 48″ N., Long. 53° 20′ 00″ E. Red can buoy with lattice tower, radar reflecting characteristic 1 flash red every second (0.4 seconds on 0.6 seconds eclipse).

Iminoco Radio Tower. Immediately in front of the main Iminoco Administration Building there is a steel tower painted red, elevation above MLWIS is 408 ft. Location is Lat. 26° 48′ 15″ N., Long. 53° 19′ 10″ E. A red light occulting every second is exhibited from the top of the tower.

Decca Navigator Station Tower. A lattice work tower painted in red and white bands 336 ft. high above MLWIS is located Eastward of the Terminal in position Lat. 26° 47′ 39″ N., Long. 53° 22′ 25″ E.

ANCHORAGES: Vessels must not enter port limits (which enclose a Prohibited Anchorage Area and Manoeuvring Area). They should proceed to vicinity of suggested Anchorage Area East of Oil Loading Dock and East of Long. 53° 22′ 00″ E., and in suitable depths of water wait for LAPCO Berthing Master. The sea bottom is good holding ground. Depth about 40 m.

Prohibited Anchorages. Anchorage is prohibited in the vicinity of the Sassan and Rostam submarine pipe-lines and for a distance of 2,000 ft., on both East and West sides of pipe-lines and parallel to same. The Sassan 22 in. pipe-line runs 188° seawards from a position Lat. 26° 47′ 32″ N., Long. 53° 20′ 05″ E., and the Rostam 18 in. pipe-line runs 205° seawards from a position Lat. 26° 47′ 32″ N., Long. 53° 19′ 58″ E.

In addition to the above, a 14 in. submarine pipe-line has been laid from the Bahram Oil Field (undeveloped) to Lavan Island.

The pipe-line runs approximately 056° T from an offshore location in

Lat. 26° 18.8′ N.
Long. 52° 32.8′ E.

to a shore location on Lavan Island at

Lat. 26° 47.6′ N.
Long. 53° 19.6′ E.

Vessels are requested not to anchor or carry out any under sea/seabed operations in the vicinity of these pipe-lines.

To draw attention to the Prohibited Anchorage Area in the vicinity of the Sassan Oil Field to Lavan Island 22 in. submarine pipe-line 3 notice boards have been established. The notice boards are 3 m. high and 8 m. long, painted white, with the words "Prohibited Anchorage" painted in red in English and Farsi.

These notice boards are in the following positions:

Lat. 26° 47′ 33″ N.,	Long. 53° 19′ 41″ E.
Lat. 26° 47′ 33″ N.,	Long. 53° 20′ 08″ E.
Lat. 26° 47′ 20″ N.,	Long. 53° 21′ 18″ E.

Terminal Port Area. Area bounded by a line joining positions:

Lat. 26° 47′ 31″ N.,	Long. 53° 22′ 00″ E.
Lat. 26° 46′ 21″ N.,	Long. 53° 22′ 00″ E.
Lat. 26° 47′ 26″ N.,	Long. 53° 19′ 22″ E.
Lat. 26° 46′ 49″ N.,	Long. 53° 19′ 22″ E.

Anchorage within Port Area prohibited. Port Area used by vessels manoeuvring to and from oil loading jetty, and no vessel permitted enter Port Area until Company Berthing Master on board.

Offshore Oil Platform. Anchorage prohibited in area of Sassan Oil Field, some 76 miles South of Lavan Island Marine Terminal, due to existence of numerous submarine oil pipe-lines connecting oil wells and production platform.

RESTRICTIONS: 24-hour service. No restrictions for vessels up to 200,000 d.w.t. Tankers in ballast required to have on board at least 33% of their d.w.t. in ballast (including permanent ballast) and not more than 10 ft. by the stern. The state of the tide does not affect entry.

The max. draft allowed for tankers using Berth No. 2 is 43 ft. 6 in. (13.26 m.).

Keel clearance of 3 ft. required by the terminal at all times.

MAX. SIZE: Vessels of 200,000–225,000 tons d.w.t. may be accepted with prior approval from LAPCO, which is based on standard 14 point questionnaire, detailing dimensions, loaded and ballasted draft and ability to segregate or load concurrent with deballasting. Determining factor is maximum elevation of the loading arms above the water line. Cargo vessels bound for the LAPCO cargo buoy mooring are limited to 26 ft. (7.92 m.). No restriction on vessels using the anchorages.

Max. Load on arrival: Following is a table of maximum loads that different size tankers can have on board on arrival, and remain acceptable for berthing:

(a) The maximum size vessel that is acceptable for berthing in a fully loaded condition is 100,000 d.w.t. This refers to vessels nominated for bunkers only.

(b) The maximum acceptable arrival load for tankers in the range 101,000–120,000 d.w.t. is 90,000 tons (675MB ±).

(c) The maximum acceptable arrival load for tankers in the range 121,000–170,000 d.w.t. is 85,000 tons (638MB ±).

(d) The maximum acceptable arrival load for tankers in the range 171,000–225,000 d.w.t. is 70,000 tons (525MB ±).

This schedule to be used in conjunction with the standard 14 point questionnaire for VLCCs.

CLEARANCE: *(Arrival):* After Berthing Master has boarded vessel at Port Limits, and before vessel allowed proceed, Master will be required to sign following forms. *(a)* Condition of use of Port of Lavan Island, *(b)* Tug Requisition.

Master will also be provided with copies of Fire and Safety Regulations and a Safety Inspection form. After pratique granted, Customs inspection carried out. Master will be required to furnish particulars of vessel including bonded stores, cargo, bunkers, and other information. 5 copies of the crew list and stores remaining on board will be required before clearance is granted. *Customs surveillance is strict.*

The Terminal operates an Early Sailing System covering all cargo documentation. The following documents will be prepared in advance, *except for cargo figures,* and presented by the ship's Agent to the Master for his signature, upon the ship's arrival at the loading dock.

(a) B/L. (b) Certificate of Origin and Cargo Manifest. (c) Tanker Time and Loading Report. (d) Report of Cargo and Ships Ullages. (e) Master's receipt for documents.

Official cargo figures will be passed to the Master within 1 hour of his departure for insertion by the Master on the Bill of Lading and Certificate of Origin and Cargo Manifest.

In cases of disagreement over cargo figures the Terminal will accept the Masters "Note of protest" by telex, by the authorised ships Agent, or by written note handed to the Berthing Master.

HEALTH: Owners should check with Agent respecting any recent imposition of anti-epidemic regulations and requirements for additional injections for crew members. In the case of tankers, doctor will board when ship berthed at Loading Dock and for cargo vessels after ship has anchored. Should vessel, in either case, arrive from another Iranian port and carry a Clear Bill of Health, doctor will not normally board, and pratique automatically granted.

Signals to be exhibited for vessels entering from foreign port: by day: "Q" Flag flown at masthead; by night: red all-round light, over white all-round light. If suspected that ship has disease or fever on board, ship will report details by VHF Channel 12 to Lavan Island.

There are occasional outbreaks of cholera. International Certificates of Inoculation/Vaccination are essential.

See Radio, "Free Pratique".

RADIO: Vessels nominated to load at Lavan Island should transmit arrival information 96 hours and confirm 48 hours prior to arrival.

Arrival messages should be transmitted to the following address through either Bahrain Radio (A9M) or Khorramshahr Radio (EQK) or Lavan Radio (EQV).

"LAPCO Tehran Tlx 21–2420 LAPC IR ATTN MARSUPT LAVAN".

Arrival messages to be in the following format:

AA Name of ship.
BB ETA Lavan in GMT and last port.
CC Cargo(s) required and bunker(s) required.
DD Deballast time.
EE Size and number of connections for cargo/bunker.

If bunker connection only one side of manifold, state location.

Lavan Radio Station, is operating on 500 kHz, call sign EQV, from 05.30z–13.30z.

Lavan Terminal maintains a listening watch 24 hours on VHF Channels 16 and 12.

Vessels should commence calling "Lavan Island" 4 hours prior to arrival, on Channel 16. When contact has been made, switch to working frequency Channel 12.

LAPCO tugs maintain a listening watch on 2182 kHz. Vessels should commence calling "Pourandokht I" when passing the Quoin Island. When contact has been made, switch to working frequency 2638 kHz.

Radio Free Pratique: Vessels requesting Free Pratique by radio are required to transmit the following message through the same Channels as their ETA advice.

AA Name of vessel and ETA Lavan Island (in GMT).
BB Number of crew and state of health.
CC Number of vaccinations required for Smallpox and Cholera.
DD Number of deaths or cases of serious illness in the last 30 days.
EE Name all ports called at during the last 30 days.
FF Master's Name.

Masters should use item letters and digits to minimise cable length.

TUGS: 2 diesel powered tugs. Both tugs are twin screw, 3,120 b.h.p. Kort Nozzle types with a static bollard pull of 42 long tons. 2 tugs are used on every movement.

For each tug employed berthing, 3 copies of Towage Certificate to be signed by Master and delivered to LAPCO Berthing Master. For each tug employed unberthing, 3 copies of Towage Certificate to be signed by Master and delivered to LAPCO Berthing Master.

The LAPCO tugs and launch assist in berthing and unberthing. These are under the direct supervision and control of the LAPCO Berthing Master. Service and facilities provided by the company including the services of the LAPCO Berthing Masters, tugs, mooring launch, or berthing equipment, are at the vessel's risk.

Note: On occasions when tugs are employed standing by vessels whilst in the berth for use, if required, the full tug charge will be charged.

BERTHING: The Oil Loading Dock is located on the South Coast approximately 2.5 miles from the East end of the Island. The loading platform is 2,030 ft. from the shore, located in position Lat. 26° 47′ 06″ N., Long. 53° 20′ 30″ E.

Deck level is 31 ft. 4 in. above sea level Mean Low Water Indian Springs. Under normal conditions, 12 lines used to moor a vessel as follows: Forward: 3 headlines, 2 breast lines and 1 spring. Aft: 3 stern lines, 2 breast lines and 1 spring.

During Winter S.E. storm periods, usual to use one each additional headline and breast line at each end, making a total of 16 mooring lines. Breast lines and springs of wire rope acceptable, and normally secured to jetty patent quick-release hooks. Three-inch circumference messenger lines, 240 ft. in length, available each berth for hauling lines from mooring launches up vertical face of jetty fendering and along jetty deck, with assistance of electrically operated capstans sited at intervals along jetty.

Berth No.	*Least depth water (in ft.) above chart datum MLWIS‡*	*Maximum capacity d.w.t.*
1	68.33	200,000*
2	65	75,000**

‡Chart Datum is MLW Indian Springs and highest tide is 7 ft. 3 in.

*Vessels in the range 200,000–225,000 d.w.t. may be accepted subject to prior approval from LAPCO Management which is based on answers to a 14 point questionnaire.

**Vessels are accepted for berth 2 based on tonnage, overall length (maximum 850 ft.=259 m.), position of the manifold in relation to the bow, and always subject to a maximum loaded draft of 43 ft. 6 in. (13.26 m.). Vessels over 65,000 d.w.t. should always be cleared by LAPCO prior to firming-up a nomination.

Distance from ship side to manifold flange	*Maximum elevation of manifold above chart datum*
10 ft.	76 ft. 6 in.
12 ft.	75 ft. 9 in.
14 ft.	75 ft. 0 in.
16 ft.	74 ft. 0 in.
18 ft.	72 ft. 9 in.

Loading Arms: Rigid "Chicksan" hydraulic operated loading arms are situated on both sides of the loading platform.

On Berth No. 1 4×16 in. for crude oil loading.
1×12 in. for product loading (fuel & gas oil).
On Berth No. 2 2×16 in. for crude oil loading.
*1×16 in. for naphtha loading.
1×8 in. for product loading (fuel & gas oil)

*Gas oil can also be loaded through this arm.

All loading arms are fitted with a series 150 ASA American Standard outer flange with quick connection coupler.

The Terminal carries a full range of aluminium reducing spool pieces and flexible hoses (15 ft. × 8 in.) for crude and product/bunker connections.

Tankers to have ready: Fore and aft winches ready for use, and minimum of 16 good mooring lines, 120 fathoms each.

The Terminal accepts tension wires or ropes, only with proper supervision on the brake. Derricks, winches and gear must be rigged on port and starboard sides, topped over the manifold.

Ship's crews perform all operations of mooring, and unmooring, on board ships.

Shore gangways provided at both berths.

LOADING: Tankers should arrive with 16 in. series 150 ASA flanges on all manifold connections to be used for loading.

Sassan Crude Oil of approximately 34° API gravity is available from the LAPCO 4,000,000 barrel Tank Farm. Delivery of oil to the loading dock is by gravity flow, through two 36-in. diameter pipe-lines.

Rostam Crude Oil of approximately 35° API gravity is available from the IMINOCO 1,500,000 barrel Tank Farm, immediately West of the LAPCO tanks. Delivery of oil to the loading dock is by gravity flow through two 36-in. diameter pipe-lines.

The temperature of Sassan crude oil varies between 91°F and 78°F (Summer/Winter), and the temperature of Rostam crude oil varies between 85°F and 66°F (Summer/Winter).

After the vessel has berthed, the Berthing Master, who acts as a Loading Master, will discuss arrangements, inspect tanks, sign the tanker dry certificate, and finally check cargo figures with ship's personnel. Before loading commences, all items on the "LAPCO Safety Check List" will be complied with, and an inspection made by the Chief Officer and the Berthing Master.

Loading rates of up to 52,000 bbls/hr. to Berth No. 1, and 32,000 bbls/hr. to Berth No. 2 can be achieved at Lavan Island when only 1 vessel loading.

Up to 40,000 bbls/hr. to Berth No. 1 and 24,000 bbls/hr. to Berth No. 2 can be achieved when loading 2 ships simultaneously.

The minimum flow rate is 15,000 bbls./hr. All vessels accepting nominations to load at Lavan Island must be capable of loading crude at rates above this figure.

Do not close valves against crude oil flow.

Emergency Flow Stop Signal if all communications fail will be a continuous sounding of the ship's whistle.

GENERAL CARGO: Vessels with general cargo for LAPCO should wait for instructions from port control in the general anchorage area, approximately 2 miles S.E. of the loading dock.

A sea berth has been laid adjacent to the small craft harbour at the East end of the Island to enable cargo vessels to discharge in most weather conditions.

The vessel is secured by port and starboard anchors on a running moor spread together with three stern ropes secured to a stern mooring buoy. The vessel lies in a heading of 225° in such a manner as to provide a lee side against either the N.W. or S.E. prevailing winds.

To assist the vessel to moor, LAPCO Berthing Master, tug, and mooring launch are provided without charge.

All cargo vessels shall comply with the Port Rules and Regulations as far as it affects them. Upon arrival, Masters will be issued with and sign for a copy of the official Port Book.

Cargo vessels should use the same procedure of arrival notification as laid down for tankers.

LAPCO operates a 300 ton flat top barge which is permanently stationed at Lavan Island to off-load general cargo. As soon as the vessel is moored, the barge will be available alongside and will operate on a 24 hour basis.

Stevedoring is carried out on board by an independent Agent and at the dock side by LAPCO.

BALLAST:

(a) Masters are warned that no dirty ballast, or bilge water should be disposed of in sea within 50 miles of coast of Iran. When so disposing of ballast all pipe-lines, sea suctions, strainers, and pumps that are later to be used to discharge clean ballast, must be flushed clean, so that there will be no chance of even a small amount of sea pollution when the clean ballast is pumped out.

(b) As soon as practical after arrival, all vessels' tanks will be inspected for oil in ballast. During discharge of ballast simple inspections will continue.

(c) Should ship's tanks be found leaking it will not be later accepted for loading, unless satisfactory evidence duly certified by "Lloyds" or "ABS" Surveyors, or other recognised surveyors of repair is submitted.

(d) Any vessel rejected because of dirty ballast or sea pollution will automatically nullify "Notice of Readiness" and will lose any priority of position for loading. On return from sea, Masters should tender new Notice of Readiness to LAPCO. If this accepted by LAPCO the vessel will be entered for loading as of new time of acceptance. Vessels will be rejected for dirty ballast at all times.

(e) Vessels equipped with separate system of ballast tanks will be allowed to discharge ballast and load oil simultaneously, providing approval is first obtained from the LAPCO Terminal Superintendent and provided NIOC Petroleum Inspector agrees.

(f) Vessels which arrive in ballast to load part cargo, should endeavour to place the ballast in such a manner as to allow loading to commence upon arrival at the loading dock.

The ballast may be retained for discharge enroute to the next port, or discharged concurrent with loading. Provided the vessel can show adequate valve separation, this method is accepted by the Terminal, and will be finally confirmed by the Loading Master when satisfied that no pollution or contamination will occur.

Vessels arriving in ballast to load a full cargo, who carry most of their ballast in "permanent ballast" tanks, should also endeavour to arrange the remaining ballast in such cargo tanks as to allow loading to commence upon arrival at the loading dock, and discharge concurrently, using segregated lines and pumps. The Terminal will accept this system on the same basis as above paragraph.

(g) A vessel must have sufficient ballast for safe handling having due regard to existing weather and sea conditions. Through a careful watch of the weather and sea conditions, frequent exchange of information between ship and Terminal, and by a knowledge of the behaviour of his own vessel a Ship's Master may come to the Terminal with a minimum of ballast and thus lessen any possibility of infringement of sea pollution regulations.

DENSITY: The temperature of sea water alongside the Loading Dock varies from 71°F. in January to 93°F. in August. The density of sea water alongside the Loading Dock varies between 1023 and 1026.

TIDE: The tide is mainly diurnal with a mean range of 3 ft. 0 in., and extreme range of 5 ft. 6 in., and an extreme height of 7 ft. 0 in. above chart datum, which is MLWIS.

The current runs 1 to 2 hours behind the tide, both on ebb and flood, mainly setting the vessel onto the dock.

There are only very short periods when there is no current running.

An automatic chart recording tide gauge is fitted on berth No. 2.

WEATHER: In Summer time from May to September temperature reaching 110°F. (43°C.) and humidity ranging from 10% to 100%. The Winter (November to March) mild and pleasant with minimum temperature approximately 48°F. (9°C.). The wind for most of year from N.W., but sometimes particularly during Winter strong S.E. storms likely to occur lasting for several days. Oil Loading Pier partly sheltered from N.W. winds, but exposed to winds from South.

During Winter storms, waves of 8 to 10 ft. often occur. A max. wave height of 15 ft. has been recorded at the Southern end of the Island.

STEVEDORES: For cargo vessels the Agent requires 4 days Notice of Arrival in order to transport labour from Bandar Abbas. Agent provides labour for working cargo "to the rail" and receiver provides lighterage and labour thereon.

MEDICAL: LAPCO and IMINOCO operate small clinics on the Island with resident doctors. This facility will be made available for emergency cases only.

FRESH WATER: None available.

FUEL: Bunkers are now available at Lavan Island and can be loaded at both berths of the tanker loading dock through rigid hydraulic operated Chiksan loading arms.

These bunker products are provided by the Lavan Distillation Complex (LDC) which is operated by the National Iranian Oil Company (NIOC). Available bunker products are fuel oil and gas oil.

The plant also produces naphtha.

Bunker Requests:

Requests for information on bunkering should not be directed to LAPCO or IMINOCO. All questions relating to the bunker facility at Lavan Island will be handled by NIOC Marketing & Exports Division.

The address is:

Marketing & Exports,
National Iranian Oil Company,
P.O. Box 1863,
Tehran, Iran.
Cable Address: Naftmelli Tehran
Telex: 21-2514, 21-2613 and 21-2182
Telephone: 6151 – ask for Marketing.

LDC Tank Capacity is:

Naphtha 53,000 cu.m. (333,360 bbls.)
Fuel Oil 38,400 cu.m. (241,530 bbls.)
Gas Oil 30,800 cu.m. (193,730 bbls.)

LDC loading rates, by pump are:

Naphtha 1,500 t.p.h.
Fuel Oil 500 t.p.h.
Gas Oil 500 t.p.h.

LDC loading arms at the tanker dock are:

Berth No. 1: 1×12 in. supplying both fuel and gas oil.
Berth No. 2: 1×8 in. supplying both fuel and gas oil.
Berth No. 2: 1×16 in. supplying both naphtha and gas oil.

LDC product specifications are:

Naphtha SG at 60°=0.7205 (API at 60° 64.9)
Fuel Oil SG at 60°=0.9560 (API at 60° 16.5)
Viscosity Redwood at 100°=1,440 seconds.
Gas Oil SG at 60°=0.8450 (API at 60° 35.9)

CARGO GEAR: Ship's discharging dry cargo to barges in the cargo ship anchorage use ship's gear.

FIRE PRECAUTIONS: Vessel receives full detailed instructions from Berthing Master. Vessels must have fire-wires and engines not to be immobilised.

CONSULS: No consular representation on Lavan Island. Nearest consulates at Khorramshahr near Abadan.

REPAIRS: No repairs allowed alongside oil loading jetty. No workshop or repair facilities available. Ship's main engines must be available at all times while alongside jetty.

MARINE SURVEYS: Lloyd's Surveyor based at Khorramshahr and can usually be called through vessel's Agent at 72 hours notice. A.B.S. surveyor also based at Khorramshahr.

AIRPORT: No scheduled or regular air flights to Lavan Island. All aircraft required for transportation of goods or passengers must be made by charter. Airport is used by Oil Company Charter planes only and no other passengers are carried except in an emergency situation.

TIME: Standard zone time for Iran is GMT plus 4 hours. Daylight saving time, which was adopted in 1977, advances clocks 1 hour from March through October.

POLICE/AMBULANCE/FIRE: There is a Government Gendarmerie Station on the Island. There are no telephones established for these services. Emergencies will be handled by LAPCO staff in case of tankers.

SHORE LEAVE: Ships' crew not allowed to go ashore.

CREW CHANGES: Not permitted.

REGULATIONS: (Miscellaneous): *Painting and scaling.* Painting, chipping, scaling or spray painting on deck or overside *strictly prohibited* while vessel at any jetty berth.

GENERAL: *Flag:* All vessels are required to fly the Iranian Flag (green uppermost) in Iranian territorial waters which extend 12 miles offshore.

Garbage: Dumping overside of garbage and refuse prohibited in Port Area.

Sanitation: Government Health Regulations require suitable covers to be fitted over all lavatory, discharge outlets, etc., to prevent fouling of jetty or craft alongside.

Damage to Port Facilities: If a Master has reason to suppose that any damage has been caused by his vessel to any Port Facilities, he must agree, in writing, with LAPCO Berthing Master as to nature and extent of such damage, and this must be confirmed by LAPCO Marine Superintendent. LAPCO has standard liability forms which cover both ship and shore, and are issued on every occasion.

Rat-guards: All ships berthed alongside must provide Rat-guards for Ship's Moorings.

No visitors: No visitors allowed on terminal dock, or on board vessels alongside dock, unless by written permission of Marine Superintendent. Only persons having authorised work will be given access to port limits, dock or vessels.

AUTHORITY: LAPCO Tehran. Terminal Office: Lavan Island.

AGENT: Gulf Agency Co., Lavan Island.

Head Office: Khorramshahr. Gulf Agency Co. (Iran) Ltd., POB 110, Khorramshahr, Iran. Cables "Confidence", Khorramshahr. Tel. 2280, 2278, 4755–58. After office hours 2670, 2950, 3193. Telex 654033, 654000, 654051 (answer back "GAC IR").

Tehran office: Telex 212507, 212856, 213043 and 213044. (answer back "GAC IR") stating: "For Khorramshahr".

Air-freighted spare parts and ships' mail should be addressed: Gulf Agency Co. (Iran) Ltd., POB 62, Abadan, Iran, and sent to the Abadan International Airport marked "In Transit for M/S ......".

Air-freight consignments should be routed by flights arriving *directly* to Abadan Airport without trans-shipment at Tehran. Cable advise "Confidence", Abadan, of flight details and airway bill number.

RAS BAHREGAN (Norwuz Loading Terminal): 29.43 N. 50.10 E. (See Plan Book)

DOCUMENTS:

5 Crew and Passenger Lists.
4 Stores Lists.
4 Bonded Stores List.
Clear Bill of Health from last port.
4 Bills of Lading.
6 Manifests.

PILOTAGE: Vessels to be moored at Bahregan Terminal will be boarded by a Mooring Master of the Company within 2 miles of the SBM. The Mooring Master will advise the ship's Master on approaches to the berth, mooring and unmooring, connecting and disconnecting the floating hose, and in all other operations within the berthing area.

Vessels are requested to have a pilot ladder safely and securely rigged, ready for immediate use, and long enough to reach the Mooring Master's launch. If at night, adequate lighting must be rigged overside for the Mooring Master to approach the side of the ship and climb the ladder safely. Adequate searchlights should also be rigged when mooring at night.

The Mooring Master will be in direct charge of the portable VHF ship-to-shore radio-telephone communications.

ANCHORAGE: The SBM is in the open sea with no surface obstructions in the vicinity. However, anchorage is prohibited in the following areas:

(a) Immediate vicinity of the SBM – within a 1.2 mile radius of the SBM.

(b) One mile on either side of 36-in. submarine pipe-line from SBM to Bahregan Oil Centre.

Suggested anchorage area is 2 miles S.W. of the SBM.

RESTRICTIONS: The Bahregan SBM Terminal operates 24 hours per day, 7 days a week. However, mooring or unmooring is only carried out if fair or moderate weather conditions are prevailing.

In the event that berthing is delayed on account of weather, vessels will keep their position in line. Vessels required to leave the terminal area on account of weather (terminal closed) should keep in contact with the terminal via radio in order to be available when weather moderates.

FLAG: All vessels are required to fly the Iranian flag on the foremast during daylight hours. Iranian territorial waters extend 12 miles seaward from the mainland and adjacent islands.

ADVICE OF ARRIVAL: It is important that ships establish radio contact with SIRIP when 3 days distant from Bahregan Terminal and maintain this contact until just previous to arrival at the Terminal. All ships should send a 72 hour ETA message to SIRIP giving the best estimate of ship's arrival time at the Terminal.

Further ETA messages should be sent to SIRIP when the vessel is 24 and 12 hours distant from Bahregan Terminal and at any other time any appreciable change occurs in the original ETA or those subsequent thereto. The 12-hour ETA should include a positive statement regarding "ship's readiness to load" on arrival and the number of hours that will be required to discharge clean ballast after ship is berthed in mooring, as well as details of the flange size of the manifold.

MAX. SIZE: SBM terminal designed for tankers up to 250,000 d.w.t. Min. depth at the SBM is 24 m.

HEALTH: The rules governing quarantine of vessels is the same as found in other ports of the world.

RADIO: Bahregan Oil Centre Radio Telephone Station maintains a daily watch on the following frequencies at the times stated.

GMT: 0530–0630 on 2477 kc/s., 1130–1230 on 8230 kc/s.

In addition, once a tanker has advised its 72 hours ETA the Bahregan Oil Centre maintains a watch on VHF Channel 16. The call sign for Bahregan Oil Centre is "BOC". Contact can be made on other frequencies if requested.

Telegrams of ETA may be sent to Khorramshahr Port Radio Station addressed to SIRIP Liaison Office, Khorramshahr.

Communications during mooring and loading: Portable VHF radio-telephone units are brought on board by the Mooring Master.

NOTICE OF READINESS: Tenders to load crude oil cargo will normally be accepted and the berth will be assigned to vessels in order of arrival, provided vessels have nominations for cargo valid at time, carry clean ballast and are in all respects equipped and ready to moor.

Tankers to have ready:

(a) Windlass and deck winches forward, maindeck and aft.

(b) Ten good nylon or synthetic mooring lines, each not less than 120 fathoms in length, with efficient stoppers for each line.

(c) On port side, opposite ship's manifold, equipment capable of lifting floating hose safely and expeditiously. Weight lift of 5.5 tons.

Ship's crew performs all operations on ship.

SBM: The single buoy mooring is 13.5 m. in diameter and 3.65 m. high at its highest point. It is equipped with the following navigational aids.

Signal light: White colour, flashing morse code "U" every 15 seconds. Range 5 miles.

Fog horn: Morse code "U" every 45 seconds.

Radar reflector fitted. The whole SBM is painted a bright orange colour.

TUGS: Available and required.

SINGLE BUOY MOORING: The Monobuoy is situated about 15 kms. from the shore in position 29° 43′ 02″ N., 50° 09′ 46″ E. Depth of water in vicinity of buoy mooring is 30 to 31 m. Buoy is served by a 36-in. loading line with a capacity of 700 cu. m. per hour.

MOORING: The optimum approach to the single buoy mooring is into the wind and sea. Sometimes, however, this will not be possible because of tides at variance with strong wind conditions. Accordingly, it is incumbent upon the Master to exercise careful judgement when approaching the Terminal, particularly during the hours of darkness and in poor visibility. It should be noted that the incoming tides flow towards the N.W. (approx. 310°) and outgoing tides towards the S.E. (approx. 130°). The company Mooring Master will give all necessary advice to the ship's Master.

Particular attention must be paid to the location of two strings of floating loading hose. Normally the position of the floating hoses will be controlled by the tidal currents rather than by wind effect. During daylight hours the hose string is highly visible by virtue of their covering of orange plastic floats.

When approaching the SBM at night or during poor visibility the radar is an excellent means of ascertaining the exact distance to the Terminal. The floating hose strings normally stand out very clearly on the lower radar range scales.

Once the optimum approach route has been selected, the tanker should proceed towards the SBM at a suitable speed dependent upon conditions at that time. At approximately 3,000 ft. from the SBM the tanker should have only sufficient way on for steerage. The floating hoses should be on the port side, and it is recommended that the tanker make the final approach with the SBM on the port bow, rather than dead ahead. This permits the Master on the bridge to observe the SBM at all times and in the event of any misjudgement of the approach speed there is no danger of over-running the Terminal. (The tanker should adjust her engines such that all way is off the vessel between 150–50 ft. from the SBM).

At a suitable distance from the SBM the service launch which will have maintained station during the approach, will take two lines from the ship and secure them to the mooring bitts on the SBM. The launch will then bring the 2 large SBM float ropes to the ship, which should have a messenger line ready to raise them. Once these float ropes (each of which has a breaking strain in excess of 305 tons) are secured the ship may, if so desired, recover its own lines which are used only to provide a safeguard during pick up of the SBM float lines.

In the event that the floatrope mooring lines provided by the Company are not used or not available, the ship is secured using 6 lines from the tanker all on port side.

HOSES: 2 flexible floating hoses connect the ship's manifold with the Terminal's cargo manifold, and separate hoses connect the underside of the SBM to the submarine pipe-line end manifold (PLEM) on the seabed. A submerged peripheral fender extending outward from the hull is provided to prevent damage to the floating hoses and SBM, should the tanker ride up against it.

After the vessel is securely moored the service launch will tow the end of the floating hoses to a point on the port side of the tanker immediately below the tanker's cargo manifolds. The tanker's derrick runner should be ready to lift the hoses which will be secured by the attached chains in such a manner as to allow the ends of the hoses to reach the ship's manifold. The weight of the hose to be lifted is approximately 5.5 tons.

The hoses are fitted with 16-in. flanges, and the Company will provide reduction pieces to 14 in. or 12 in.; other sizes (as well as gaskets) as required to make connections to ship's manifold. The hose connection is normally performed by SIRIP's loading crew under the supervision of the Mooring Master. However, a ship's deck officer must be present, and must direct the ship's crew as required.

LOADING: The ship's officer responsible for loading should give SIRIP's Mooring Master at least half an hour's notice of readiness to commence loading. In any event, the ship should advise SIRIP during its last radio contact prior to arrival of the estimated time required to discharge ballast, so that an approximate time for commencement of loading can be established. It is also helpful if the ship advises the size and type of flange and also the distance of the manifold from the ship's side during radio connection.

The initial loading rate is normally about 1,500 long t.p.h. while the recently coupled flanges are inspected for leakage and the Mooring Master and ship's officer satisfy themselves that all is in order with the SBM and the ship's facilities. As soon as this is done, the loading rate is increased to the max. of 6,000 long t.p.h.

Caution: The incoming oil stream is controlled from the shore and it is extremely dangerous to close a ship's valve against the pressure, which may damage hose, ship's piping, or shore facilities. Vessels will be held liable for damages resulting from failure to observe this precaution.

The ship's officer in charge of loading should advise the Mooring Master half an hour before he estimates loading will be completed.

On advice from the ship a min. of 3 minutes is required to stop the flow of crude oil, however, a reduction in loading rate before topping up the final tanks may be arranged on request to Mooring Master.

During loading or unloading the International Code Flag "B" shall be displayed from a topmast signal halyard during daylight hours. During hours of darkness a red light shall be displayed. This light should be of a character such as to be visible at a distance of at least 1 mile, and show an unbroken light all round the horizon.

CARGO: Bahregan Sar Crude, API from 20 to 32, Temperature 85°F.

BALLAST: The waters of the Gulf must not be polluted, and only clean, oil-free ballast (and/or bilge water) may be discharged.

As soon as practicable after arrival, all vessel's tanks will be inspected for evidence of oil ballast and during discharge of ballast, similar inspection will continue. If evidence of oil appears at either of these inspections, the ship must leave mooring and proceed at once to a point not less than 50 miles from any coast or island and there completely discharge all oily or dirty ballast.

Vessels equipped with a separate system of ballast and cargo tanks will be allowed to discharge clean ballast and load oil simultaneously, providing approval is obtained.

Note: When loading is carried out under rough weather conditions the tanker should not be allowed to get into a light condition, and therefore deballasting should not be completed until a reasonable amount of the cargo has been loaded.

PETROLEUM INSPECTORS: Services of the Saybolt Agency available subject to at least 3 days advance notice.

MEDICAL: Depending on the availability of the Company doctor, medical assistance can be provided, although there is no hospital available. In cases of extreme emergency, SIRIP will arrange transport to Abadan at the ship's expense and responsibility.

CUSTOMS: A Customs Officer boards each vessel calling at the terminal.

DENSITY: Salinity is approximately 20% more than normal sea water.

BUNKERS: Not available.

WATER: Not available.

STORES: Not available.

SERVICES: No facilities for crew change, etc., or any other vessel's requirements, as the terminal is situated off-shore in the Gulf and there are no transportation facilities other than Oil Company's flights from Abadan which are meant for their own personnel.

REPAIRS: Masters of vessels loading at Bahregan Terminal are advised that this port is considered an "open roadstead" and under no circumstances may engines be shut down for repairs while their ships are moored. There are no facilities at Bahregan Terminal for making vessel repairs.

CONSULS: There are no consulates at the Bahregan Terminal; however, consular or diplomatic representatives for most nations maintain offices in Tehran and some in Khorramshahr.

SHORE LEAVE: There is no shore leave permitted due to lack of facilities.

TERMINAL OPERATORS: Societe Irano Italiene des Petroles (SIRIP).

AGENTS: See "Khorramshahr". (Actual handling is effected by Oil Company SIRIP, but Khorramshahr Agents are in a position to handle ETA messages, etc., addressed to them via Khorramshahr Port Radio EQK, also to communicate messages to and from SIRIP Khorramshahr and shipowners. Agents can also pass arrival and sailing details to principals, and despatch copies of loading cargo documents as required by Owners. Forwarding ship's mail to Bahregan and despatching official and crew mail received from ship, can be arranged by Agents. Such services are not undertaken by the Oil Company, and it is advisable to appoint an Agent at Khorramshahr.)

SIRRI ISLAND: Approx. 30 miles West of Abu Musa.

Only barge jetties available for discharging barges and to accommodate supply vessel. This so called "Port for Supply Vessels" is located on South-eastern part of the island where the loading terminal will be constructed.

All cargo for Sirri Island consequently has to be discharged onto barges in open-sea and barges towed to above port for discharge.

Stevedores from Sharjah, Dubai and Abu Dhabi allowed to work cargo for Sirri.

NOTES

Please also advise Shipping Guides Ltd.

Iraq

GENERAL

TANKERS: Please note that all correspondence, cables, and telexes concerning tankers calling at Iraqi terminals are to be directed to following addresses.

Postal address: State Enterprise for Maritime Agencies. P.O. Box 3, Basrah.

Cable address: Tankers Basrah. Tankers Fao.

Telex No.: 7009.

Cables for arrival should be addressed to both "Tankers" Basrah and "Tankers" Fao.

ALBAKR TERMINAL: 29.41 N. 48.49 E.

(See Plan Book)

LOCATION: The terminal is 31 miles S.E. of Fao in position 29° 40′ 36″ N. 48° 48′ 38″ E. Depth of water 29.30 m. at MLWOST.

PILOTAGE: Pilotage is compulsory for all inward and outward tankers using the Khor al Khafja buoyed channel when the draft is over 15.85 m.

NAVIGATIONAL AIDS: 8 lighted buoys define the deep water channel at the 69 ft. (21m.) depth contours in the immediate vicinity of Albakr Terminal. The buoys are battery powered with quick flash characteristics with visibility range of 1 mile. The perimeter of Albakr Terminal is outlined with flashing marine lanterns to define a hazard to marine navigation. The lanterns are battery powered, some are white lens flash with 5 mile range and others are red lens flash with 2 mile range.

The radio tower is equipped with an aviation hazard light (red). It is also equipped with a long range marine beacon (white) located below the red hazard light.

MAX. SIZE: Max. length, 366 m. Max. draft 21 m. Night berthing possible.

RADIO: Tankers are requested to contact Albakr Terminal through Basrah Control Radio (YIR) at least 72 hours, 48 hours and 24 hours prior to arrival giving ETA. Prior to docking the tanker must also provide the terminal operator with information required to prepare the "loading order" format, this information should include the type of crude to be loaded, loading rate in barrels, the Registry No. of vessel, nationality, name of Master. The Master will be informed of approach instructions such as location of berth, weather and sea conditions, and the communication channel to be used for vessel docking assistance.

Vessels bound for Iraqi territorial waters should also contact Fao Radio (YIS) at least 24 hours before entering territorial waters requesting free pratique from Medical Officer Fao. The request should indicate the state of health of the crew on board together with relevent information.

RADIO:

Name of Station: Khor al Khafja FC(10) Albakr Terminal FP
Call Sign : Albakr Radio
Service : 24 Hours

The following table shows the details for contacting the Iraqi port coast stations. The No. between brackets corresponds to the notes explained below.

Frequency	*Emission* Channel	Class	Power	*Service* Nature
156.375 mHz.	67	F³	0.02	OT (2) (3) (6) (8)
156.550 mHz.	12	F³	0.02	OT (2) (3) (3) (5)
156.80 mHz.	16	F³	0.02	(1) (3) (4) (7) (8) (11)
161.80 mHz.	24	F³	0.02	

FC	Coast Station
FP	Port Station
OT	Station open exclusively to operational traffic of the service concerned
(1)	Transmits urgent notices to mariners
(2)	Transmits meteorological bulletins (North Arabian Gulf Weather Forecast)
(3)	For Navigation and harbour control services
(4)	Calling and Safety frequency
(5)	First priority working frequency
(6)	Second priority working frequency
(7)	Weather bulletins at 0630, 1430 hrs. and on request
(8)	Used for marine traffic control
(10)	Station under the direction of Iraq administration
(11)	Permanent watch

While in Iraqi Territorial waters, ships under way shall maintain watch on Channel 16 (156.80 mHz) and/or (461.5 kHz) to ensure immediate reception of the instructions issued by the controlling authorities.

(a) Khor Al-Khafja, Albakr Terminal Radio, maintains listening watch on Channel 16 (156.80 mHz).

(b) Pilot station (Al-Rasheed Radio YIBE maintains listening watch on Channel 16 (156.80 mHz) and 500 kHz.

(c) Fao Radio (YIS) maintains listening watch on Channel 16 (156.80 mHz) and 500 kHz.

(d) Basrah control Radio (YIR) maintains listening watch on Channel 16 (156.80 mHz.) and 500 kHz.

Instructions:

(a) Navigation warnings are transmitted on 500 kHz. by Basrah Control Radio (YIR).

(b) North Arabian Gulf weather forecast is transmitted by:

1. Basrah Control Radio on:
   440 kHz. at 0530, 1330 GMT and on request.
   6493.25 kHz. at 0530 GMT and on request.
   8668 kHz. at 1330 GMT and on request.
2. Khor Al Khafja, Albakr Terminal Radio, on Channel 16 (156.80 mHz.) at 0530 GMT and on request.

(c) Traffic control signal on Channel 16 (156.80 mHz.) and on 500 kHz. by Basrah Control Radio (YIR).

(d) Traffic control signal Channel 16 (156.80 mHz.) and 500 kHz. by Fao Radio (YIS).

(e) Traffic control signal on Channel 16 (156.80 mHz.) by Albakr Terminal Radio.

Commercial and Public Correspondence: Call Basrah Radio (YIR) on Channel 16 (156.80 mHz.) 500 kHz. 4, 6, 12 and 16 mHz. bands, and after initial contact has been established change to one of the working frequencies as instructed to pass messages.

TUGS: 3 available, 2 of 4,000 h.p. and 1 of 2,200 h.p.

BERTHING: The terminal consists of 2 loading platforms (A) and (B) each loading platform has 2 loading berths. Berths 1 and 2 of platform "A" and berth 4 of platform "B" can accommodate tankers ranging in size from 35,000 d.w.t. to 350,000 d.w.t., berth 3 of platform "B" can accommodate tankers ranging in size between 85,000 d.w.t. and 350,000 d.w.t., Total length of structure is 975.4 m. and 106.7 m. wide at centre.

LOADING: Storage and pumping facilities on shore are connected to Albakr Terminal by two 48 in. pipe-lines. The Terminal is capable of loading through either one of the pipe-lines at a time or both. Capacity of each line varies between 77,000 to 89,000 b.p.h. depending on type of crude (Basrah heavy or Basrah light type). With both lines in operation at the same time loading rate can be increased to max. 141,500 b.p.h. (19,000 M.T.H.). 2 tankers can load with different types of crude at the same time. Loading facilities can be remotely controlled from the Control Room.

Loading will be stopped if any regulations are not observed and in the case of oil spillage.

Loading may be stopped in still air conditions, during severe electrical storms and/or high wind and sea conditions.

Loading Arms: For each loading berth, 3 identical 24 in.×80 ft. long Luceat DCMA loading arms, with hydraulically operated coupling fitted with adaptors to allow automatic and fast coupling to tanker manifold flanges ranging from 16 in. to 24 in. (spools for 10, 12 or 14 to 16 in. are available at the terminal if required).

Gangway: A power operated telescopic personnel gangway is provided at each berth. These gangways can withstand 500 lb. load at mid-span in the extended position.

Meters: 16 in. A. O. Smith positive displacement meters, 16 meters for each platform, capacity of each meter 12,500 b.p.h.

Meter Prover: One 24 in. triple "U" bi-directional mechanical displacement meter prover for each platform. The occurence of each prover is decided bi-yearly utilizing certified volume tanks.

Continuous Crude Oil Gravity Analyzer: There is a number of ARCCO Anulus Model 1-F10 50X liquid gravity analyzers on each loading platform capable of detecting API gravity from 45° to 15°, the output from these analyzers are displayed on the appropriate loading formats and is recorded on charts in the Control Room.

These gravity analyzers are to be checked constantly and re-calibrated bi-yearly according to the manufacturer's recommendations.

A responsible member of the crew must be in contact with the terminal officials at all times.

READINESS: Notice of readiness will be received by INOC representative provided the vessel is ready to load. Lay time will commence 6 hours after receipt of Notice of Readiness berth or no berth.

SAFETY PRECAUTIONS: On arrival at the terminal, INOC Representative will discuss with the Master the "Safety Requirements" letter addressed to him also the Safety Check List.

Attention is also drawn to the Tanker Safety Guide published by the International Chamber of Shipping and to the International Oil Tanker Terminal Safety Guide.

SHIP DOCKING ASSISTANCE SYSTEM: 1 unit for each berth, consisting of speed of approach measuring instrument with fixed wide and narrow beam R.F. heads, a data processor and visual display units when the vessel is within 2 miles of Albakr Terminal. The rotatable R.F. head which is nearest to the vessel shall be aimed at it, during the docking the system will display approaching vessel's velocity.

FRESH WATER: Can be made available by Ports Administration after 24 hours notice from tankers. Water supply is from barges or small water tankers. Notice to be through Agent.

FUEL: May be made available after 72 hours notice through Agent. Supply is direct from small bunker tanker or barges. Bunkering however, not allowed while tanker is on berth and it is allowed only when tanker is waiting for berth or after completion of loading and unberthing.

SHORE LEAVE: Not allowed.

LIGHT DUES: The Iraqi Ports Administration will collect any light dues payable including those due to the Middle East Navigation Aid Service.

REGULATIONS:

(a) Mooring.

"All vessels after arrival, having been moored to the satisfaction of the Harbour Master, shall tend their own anchor cables, ropes, lines and hawsers. It is important for tankers to tend their mooring frequently"

(b) Ship must be ready to move under its own power.

While in berth, ships must be ready to move under their own power in the event of their breaking adrift, catching fire or any other emergency. No repairs are to be carried out while in the berth, which would immobilise the ship or impair her firefighting efficiency.

(c) Cleaning of Boiler Tubes.

Cleaning of boiler tubes alongside the Island Terminal is forbidden.

POLLUTION: No dirty ballast. No oily water or other refuse to be discharged overboard.

When a vessel enters port waters in ballast, the ballast water for overside discharge must be clean and a declaration signed by the Master delivered to the representative of the terminal to this effect.

Ashes, oil, oily water or other refuse must not be discharged overboard in port waters. Vessel's scuppers must be effectively plugged and leakage or spillage of oil aboard ship must not be swept or washed overboard whilst in port waters.

Vessels are subject to heavy fines and liabilities for claims arising.

AUTHORITY: All approaches to Albakr Terminal and Khor al Khafja are controlled by the Iraqi Ports Administration.

Cable MAWANI-BASRAH Telex 7008 Ports

Attention is drawn to port rules and bye laws 1942, Quarantine Regulation No. 28 of 1963 and schedules of dues and charges.

The terminal is the property of Iraq National Oil Company (INOC) and is administered and controlled by the said company to facilitate the loading of tankers with Crude Oil.

Cable Address INOC (Basrah) - PETROLNA BASRAH
INOC (Baghdad) - PETROLNA BAGHDAD

Telex No. INOC (Basrah) - 7003
INOC (Baghdad) - 2204/2295

The sole Agent for all vessels visiting Iraqi ports is The State Enterprise for Maritime Agencies. All requests for services to tankers should be directed to the Agent.

See "General" before first port.

BASRAH (Maqal and Umm Qasr): 30.31 N. 47.50 E.

DOCUMENTS: On arrival at Pilot station vessel requires following: Ship's Register, letter from Owner confirming that vessel has not called at an Israeli port, all Health Certificates of Crew must be valid against cholera and smallpox, 2 copies Crew List, 2 copies Provision List, 2 copies Manifest, Freight manifest for Baghdad Rail cargo, Breakdown list and Stowage Plan, Dangerous cargo and heavy lift list (if any).

PILOTAGE: Compulsory. Owners having vessels bound for Basrah should contact Iraqi Maritime Transport Co. Ltd., Basrah, cables "Bawakhir Basrah" to arrange Shatt-el-Arab Pilotage. Owners should also put Iraqi Maritime Transport in funds by remittance well in advance of vessel reaching Outer Bar of Shatt-el-Arab in order to cover port tonnage dues, pilotage and dredging dues, for sailing from Outer Bar to Basrah and return.

The pilot boat is located usually in position 29° 45′ 15″ N. 48° 50′ 45″ E. and on arrival vessel should contact pilot boat immediately for instructions. Pilots are available for vessels proceeding to Abadan and Khorramshahr (in Iran) and Basrah (Maqal and Umm Qasr). Providing Master has given Agent 48 hours notice of vessel's ETA Pilot will board immediately providing tide is suitable to allow vessel to continue to destination. Master should use call sign YIR on 500 kc/s for Basrah Radio in order to pass messages to Agent. Vessel should listen for messages on 440 kc/s from YIR or use VHF on Channels 14 and 12. On boarding the river Pilot will hand Master various forms for completion in respect of Light Dues and River Pilotage. Master to hoist the Iraqi National Flag.

The pilot boat is called *Al Rasheed* and on both sides amidships the word "Pilot" is painted in white.

The Navigation of the Shatt-el-Arab River is under the jurisdiction of the Iraqi Ports Administration which takes in the approaches to Abadan and Khorramshahr in Iran.

ANCHORAGES: On arrival off the pilot boat vessel can anchor with no depth restriction. On entering the Shatt-el-Arab River the following are the recognised anchorages:

Kasba Anchorage, position about 2 miles above Fao with a max. depth of 35 ft. fresh water.

Bawarda Anchorage, position about 2 miles below Abadan with a max. depth of 31 ft. in fresh water.

Hartha Point, position about 6 miles above Abadan with a max. depth of 35 ft. in fresh water. Hartha Point is the anchorage to enable vessels to lighten to 29 ft. in fresh water to enable them to cross the Karun Bar.

Abu Flus, position about 12 miles above Hartha Point with a max. depth of 29 ft. in fresh water.

Khora Anchorage, position about 3 miles from Basrah Wharves (Maqal) with a max. depth of 29 ft. in fresh water.

Jubailah Anchorage, position at Basrah Silo about 0.5 below Basrah Wharves (Maqal) with a max. depth of 29 ft. in fresh water.

The maximum length between perpendiculars permitted by the Iraqi Ports Administration for vessels in the Shatt-el-Arab River is 560 ft.

RESTRICTIONS: The Iraqi Ports Administration issue a booklet of Tide Tables each year and the movements of vessels in and out of the Shatt-el-Arab River are restricted to the high water tables for vessels using Basrah and Khorramshahr. Movements to and from these ports are only permitted in the hours of daylight. The max. draft for a vessel proceeding to Basrah is 29 ft. in fresh water. If vessel's draft exceeds this lightening takes place at Umm Qasr. Although the draft obtainable alongside the wharves is 31 ft. the max. draft for moving in the river is 29 ft. on account of the restriction at the Karun Bar.

MAX. SIZE: For vessels proceeding to Basrah the max. L.O.A. allowed by the Iraqi Ports Administration is 560 ft. There is no restriction on the breadth. The max. draft in fresh water for vessels to and from Basrah is 29 ft. The max. L.O.A. for Umm Qasr is 580 ft.

HEALTH: Masters are requested to call the Chief Medical Officer at Fao on 500 kc/s. call sign "YIS" requesting free pratique 24 hours before vessel's arrival at pilot station. All crew vaccination certificates should be valid and available for Medical Officer's arrival on board. He will also expect to find a valid Deratisation Certificate on board. Anyone boarding the vessel ahead of the Medical Officer whilst the "Q" Flag is still hoisted is liable to a fine. Special precautions are taken in case of a vessel arriving direct from an epidemic area and even if the crew are holding valid inoculation certificates the vessel may be delayed at the Pilot station. The Iraq Government is very sensitive about the spread of cholera and smallpox. Derat Certificate renewable at Basrah.

RADIO: When a vessel is 3 days away from Basrah, radio contact can be established with Basrah Radio, call sign YIR on HF 4, 6, 8, 12 and 16 kHz bands. When the vessel is within 3 days of arrival, Basrah Control Radio (YIR) can be used (transmitting on 500 kHz and receiving on 461.5 or 440 kHz).

List of Coast Stations (Iraq). Summary of Procedures:

1. Whilst inside Iraq territorial waters, ships under way will maintain watch on Channel 16 (156.80 mHz) and/or 461.5 kHz to ensure immediate reception of instructions issued by the controlling authorities.

(a) Khor Al-Amaya Radio maintains listening watch on Channel 16 (156.80 mHz).

(b) Pilot Station (Al-Rasheed Radio YIBE) maintains listening watch on Channel 16 (156.80 mHz) and 500 kHz.

(c) Fao Radio (YIS) maintains listening watch on Channel 16 (156.80 mHz) and 500 kHz.

(d) Al-Wasiliyah Radio (YIT) maintains listening watch on Channel 16 (156.80 mHz) and 461.5 kHz.

(e) Basrah Control Radio (YIR) maintains listening watch on Channel 16 (156.80 mHz) and 500 kHz.

(f) Umm Qasr Radio (YIU) maintains listening watch on Channel 16 (156.80 mHz) and 500 kHz.

II. Special Instructions:

(a) Navigational Warnings are transmitted on 500 kHz by Basrah Control Radio (YIR).

(b) North Gulf Weather Forecast is transmitted by:

1. Basrah Control Radio on:
440 kHz at 0530, 1330 hrs. GMT and on request. 6493.25 kHz at 0530 hrs. GMT and on request. 8668 kHz at 1330 hrs. GMT and on request.

2. Khor Al-Amaya Radio on Channel 16 (156.80 mHz) at 0530, 1330 hrs. GMT and on request.

(c) Traffic Control Signals on Channel 16 (156.80 mHz) and 500 kHz by Basrah Control Radio (YIR).

(d) Traffic Control Signals on Channel 16 (156.80 mHz) and 461.5 kHz by Al-Wasiliyah Radio (YIT).

(e) Traffic Control Signals on Channel 16 (156.80 mHz) and 500 kHz by Fao Radio (YIS).

(f) Traffic Control Signals on Channel 16 (156.80 mHz) and 500 kHz by Umm-Qasr Radio (YIU).

(g) Traffic Control Signals on Channel 16 (156.80 mHz) by Khor Al-Amaya Radio.

III. Commercial and public correspondence: Call Basrah Radio (YIR) on Channel 16 (156.80 mHz), 500 kHz, 4, 6, 8, 12 and 16 mHz bands and after initial contact has been established change to one of the working frequencies as instructed to pass messages. Basrah Radio follows the following time-table:

Hours	*Listen on*	*Answer on*	*Traffic Lists*
H24	500	440 461.5	–
0400–0600	6265.5–6280.5	6493.25	0505
0600–0800	16708–16748	16968	0705
0800–1000	8354– 8374	8668	0905
1000–1200	16708–16748	16968	1105
1200–1400	8554– 8374	8668	1305
1400–1600	12531–12561	12986.5	1505
1600–1800	4177– 4187	4356.5	1705

TUGS: River and sea-going tugs are available. Tug-boat services are offered as and when deemed necessary by port Pilot or Harbour Master, and are available at all times during day and night.

BERTHING: See "Restrictions". All berthing of vessels at Basrah is done during daylight hours only and according to suitable tide. The Harbour Master joins vessel on her arrival at Khora Anchorage which lies about 2 miles from the Maqal Wharves. In the case of Umm Qasr the Harbour Master joins vessel on arrival off the wharves.

Height of pier (quay) at berthing places above mean low water:

(a) Maqal – Plus 12.5 ft. above zero port datum. Port datum is 3.96 ft. above mean zero level at Fao.

(b) Umm Qasr – 24.65 ft. above lowest water of spring tide which is referred to as Umm Qasr Port datum.

Difference between high and low water:

(a) Maqal: A daily variation of 5 ft. between tides and max. of 8 ft.

(b) Umm Qasr: An average of 12 ft. between tides, and max. of 17 ft.

Maqal (Ma'gal). Wharves have continuous frontage of 2,000 m. depth alongside 9.15 m. Max. length of vessel, 171 m., berthing for 12 vessels.

Umm Qasr. The port is situated at the South end of the Khor Zubair, where it joins the Khor Abdullah. The sea approach to Umm Qasr is some 103 km. in length along the Khor Abdullah, commencing in deep waters of the Gulf near the mouth of the Shatt-el-Arab.

A navigation channel the lowest part of which is 9 m. at LLW and of ample width is well marked with beacons and light buoys from the Shatt-el-Arab entrance pilot vessel to Umm Qasr. Loaded vessels with a draft of 9.75 m. will be able to sail on 2 tides each day to and from Umm Qasr. Pilot and Harbour Master services are compulsory.

The wharves are of reinforced concrete with a continuous frontage of 640 m. and depth of 9.75 m. at LLW. They are able to accommodate 3 cargo ships at one time. Each berth is 183 m. long. The wharves are provided with a total of 10 electric shore cranes from 3-15 tons capacity. In addition there is a 100 ton floating crane, 2 sea-going tugs and an ample number of mobile cranes, forklifts, eel trucks, tractors, trailers, etc. The Umm Qasr wharves are directly connected with roads and railway lines of the Iraqi Republican Railways.

There are also 2 mooring buoys 247 m. apart.

Fresh water available directly from mains on wharves.

A new project for building more berths is in hand. 5 of these berths are under construction.

3 new steel jetties at Abu Flus directly North of the Fertilizer jetty have been completed. These jetties are served by 6 electric shore cranes of 5 tons capacity. Vessels up to 171 m. long and 8.84 m. draft can lie alongside.

Grain Silo: Capacity 65,000 tons, loading capacity into ship's holds, 1,050 t.p.h. jetty 213 m. long, available for berthing ships up to 183 m. long with a draft of 8.84 m. for loading and unloading of grain.

Muftiyah Jetties: One wooden jetty with limited length owned by Port Authority for distribution of oil products and for the purpose of handling crude and refined oil for local consumption, also for exporting oil products outside Iraq. Also a further new concrete jetty available for berthing vessels 175 m.

Fertilizer Wharf: A modern concrete wharf situated on the banks of Shatt-el-Arab river at Abu Flus with a total length of 100 m., width 10 m., can accept vessels with length 182 m. and draft 8.84 m. It is allocated for the exportation of fertilizers by the State Co. for fertilizers.

Mooring Buoys: There are also 13 mooring buoys, 7 at Ashar, 4 at Sunger and 2 at Abu Al Khasib, 220 m. apart.

CRANES: The wharves are served with 60 electric shore cranes from 1.5 tons to 15 tons capacity and 1 electric shore crane of 60 tons capacity, in addition there are 2 floating cranes one of which is 100 tons capacity capable of lifting direct from ships to railway trucks on the wharves, and the other of 20 tons capacity capable of lifting cargo at a distance of 30 m. from the centre of the jib. Also about 200 pieces of various type of mechanical and electrical handling equipment.

BRIDGES: There are no bridges across the river from the entrance to Basrah Wharves (a distance of about 80 miles).

STEVEDORING: Information of the numbers of gangs required on board on vessel's arrival should be passed to the Agent together with vessel's ETA through Basrah Radio. The average rate of discharge of general cargo at Basrah (Maqal and Umm Qasr) is 6 tons per ganghour per 16 hour day. Contractors will place labour on board to discharge or load cargo but at the risk of the vessel as a Contractor will not accept any responsibility for damage done by labour.

Unloading of vessels basically carried out from vessels to wharves by Port cranes or ships' derricks. Heavy lifts and some dangerous cargoes are discharged overside into barges. Loading from jetty is by crane directly into ships. Loading at midstream is by lighters.

Bulk Cargoes: Discharged by grab direct to the Dock at Umm Qasr and by suction to the silo at Basrah. The equipment at Basrah is rated at 2,500 L/tons per day discharge and 5,000 L/tons per day loading, but under favourable conditions discharge rate may exceed 3,000 L/tons per day.

VHF: Port radar service. VHF can be used to call the Iraqi Port Administration at Basrah on Channel 16.

MEDICAL: For a vessel in to Basrah (Maqal and Umm Qasr) no advance notice is required, in order to obtain medical attention. Hospital facilities available at the new port hospital and other local hospitals.

For arrival at Basrah it is necessary to hold valid cholera and smallpox certificates.

TANKERS: See "Khor-al-Amaya".

FRESH WATER: Fresh water is available at the wharves at Maqal and Umm Qasr but where a vessel is moored in midstream and requests water there is the additional charge for the hire of the water tanker.

FUEL: Only 1 grade of fuel oil available from the Basrah Refinery, a fuel oil viscosity 200 to 210 Red. No. 1, SG 0.920. Diesel oils also available.

Fuelling is direct if taken alongside Muftiyah Refinery jetties, otherwise by barge. No coal bunkers available.

GANGWAY/DECK WATCHMEN: It is recommended that vessels moored or anchored in the river employ Gangway/Deck Watchmen.

OPENING/CLOSING HATCHES: This work is normally done by crew, but if the labour on board are asked to do it they should be supervised by an Officer.

CUSTOMS ALLOWANCES: (Tobacco) The Ship's Bond is sealed on arrival but prior to the sealing each member of the crew can have 200 cigarettes. The Bond will be opened by the Customs on the request of the Master at any time during vessel's stay in Basrah.

(Wine and/or Spirit). Each crew member is permitted to have 1 litre out of Bond. On sailing from Basrah the Master is required to wait till vessel has cleared the Shatt-el-Arab River before opening the Bond. This does not apply when vessel calls at Khorramshahr or Abadan on the way down river.

IDENTIFICATION CARDS: All crew members are required to carry with them some form of identification when going on shore.

CONSULS:

Belgium	Tel. 3666	Pakistan	Tel. 3598
Denmark	„ 3205	Sweden	„ 3511
Norway	„ 3511	U.S.A.	„ 4231
Saudi Arabia	„ 3219	India	„ 4824
United Kingdom	„ 4251	Portugal	„ 4469
Greece	„ 3601	U.S.S.R.	„ 5410
Kuwait	„ 2235		

REPAIRS: All types of repairs except major engine repairs can be carried out.

DRY DOCKS: Floating dock available, capacity 4,000 tons. Also slipway, capacity 700 tons.

REPATRIATION: No difficulties in arranging the repatriation of crews from Basrah. Emergency visas are easily obtained for joining and departing crews.

AIRPORT: The Basrah Airport formerly an International Airport is now used only as a domestic airport and is situated about 2 miles from the Maqal Wharves but 50 miles from Umm Qasr. There is a daily flight to Baghdad to connect with International flights, also 3 flights per week to Kuwait to connect with International flights.

TIME: Iraq time is 3 hours ahead of GMT and there are no alterations made to clocks during the year.

HOLIDAYS: The official holiday of the week in Iraq is Friday. The other holidays are: 3 days Id-el-Fitr; 4 days Id-el-Adha; Al Hijaa; Ashura; Birth of the Prophet Mohammad; New Year 1st January; Army Day 6th January; 8th February; 21st March; 1st May Labour Day; 14th July; 17th July.

POLICE/AMBULANCE/FIRE: A call to 7601 or 7606 will connect to the department required.

TELEPHONES: Telephone is placed on board a vessel as soon as secured alongside wharf.

GENERAL: The rain season in Basrah is between November and April and during the Summer months from May to October the temperature can be as high as 55°C. It is important that crew members keep the backs of their necks covered whilst working on deck during the heat of the Summer. The use of salt tablets are recommended during the heat of the Summer.

SPECIAL SERVICES: There is a laundry service available.

SHORE LEAVE: There is no restriction on crew members going on shore but it is important that they carry a form of identification.

REGULATIONS: The Port Authority have requested that no photography takes place from the ship whilst passing naval or military installations.

DELAYS: As the port of Basrah is considered very well equipped, cargo vessels usually receive a very quick despatch and it is very seldom that a vessel experiences waiting time for a berth for discharging, loading or bunkering. All discharge takes place at the wharves and all loading takes place in midstream at mooring buoys. Where a vessel can load whilst discharging, this is permitted.

AUTHORITY: President State Organisation of Iraqi Ports, Basrah.

AGENTS: The business of Shipping Agencies relating to all ships calling at Iraqi Ports is entrusted solely and exclusively to State Enterprise for Maritime Agencies, P.O. Box 3, Basrah.

General Cargo: Cable address: Maragent. Telex No. 7009.

Tankers: Cable address: Tankers. Telex No.: 7009.

FAO: 29.58 N. 48.29 E.

DOCUMENTS: On arrival at Pilot station, vessel requires the following:

Ship's Register.

Letter from Owner confirming that vessel has not called at Israeli Port.

Health Certificates of Crew must be valid against cholera and smallpox.

2 copies Crew List.

2 copies Provision List.

2 copies Manifest.

Dangerous Cargo List, if any.

PILOTAGE: The pilot boat is located in position 29° 46′ 45″ N., 49° 48′ 37″ E., and on arrival vessel should contact Pilot boat immediately for instruction. VHF Channels 14 and 12. Provided

Master has given Agent 48 hours' notice of vessel's ETA, Pilot will board immediately. The Pilot boat is called *Al Rasheed* and on both sides amidships the word "Pilot" is painted in white.

ANCHORAGE: On arrival of the Pilot boat vessel can anchor with no depth restriction.

MAX. SIZE: *Tankers* – 675 ft. LOA. Vessels may load to a max. draft of 35 ft. (10.65 m.) depending on the tidal conditions at the time, otherwise to a draft suitable to cross the bar with safety.

HEALTH: Masters are requested to call the Port Medical Officer at Fao on 500 kc/s, call sign "YIS4", requesting free pratique between 8 and 12 hours before vessel's arrival. All crew vaccination certificates should be valid and available for the medical officer's arrival on board. He will also expect to find a valid Deratisation Exemption Certificate on board. Anyone boarding the vessel ahead of the Medical Officer whilst the "Q" Flag is still hoisted is liable to a fine.

Special precautions are taken in the case of a vessel arriving from an epidemic area and even if the crew are holding valid vaccination certificates the vessel may be delayed at the Pilot station. The Republic of Iraq is very sensitive about the spread of cholera and smallpox.

RADIO: Basrah Radio, call sign "YIR" on high frequencies 4, 6, 8, 12 and 16 bands. Fao Radio, call sign "YIS", traffic control signals on Channel 16, and 500 kHz. Also see Khor-al-Amaya.

Tankers should establish contact with Iraqi National Oil Co. 48 hours before arrival. Call sign RNT. Frequency 6493 kHz.

TUGS: Available on request.

BERTHING: There are 4 loading jetties with a depth of 10.95 m. alongside at LWST. Each jetty has one 60 cm. crude oil delivery line with four 25 cm. flexible hoses. Jetties are floodlit and fitted with fire monitors and four 3 ton SWL cranes. Lengths of berth, 205.75 m. each. Max. draft 10.65 m. Night berthing possible. Loading rates Nos. 2 and 4 jetties average 4,000 t.p.h.

FRESH WATER: Available, rate approximately 10 t.p.h.

REPAIRS: Minor repairs possible.

MEDICAL: No advance notice is required in order to obtain medical attention. Medical units are present at Fao, Umm Qasr and Maqal. A modern hospital containing all the essential units is found at Maqal. Crew in need of special attention or admission may be referred to it by the medical units.

TIME: 3 hours ahead of GMT.

AUTHORITY: President, State Organisation of Iraqi Ports, Basrah.

KHOR-AL-AMAYA: 29.46.44 N. 48.48.36 E.

OPERATORS: Basrah Petroleum Company Limited.

LOCATION: Island Terminal about 17 miles out in the Gulf from the mouth of the Shatt-el-Arab River.

ADMINISTRATION: All waters of the Shatt-el-Arab and of the approaches to Khor-al-Amaya are controlled by the Iraqi Ports Administration.

APPROACHES: *(a) Lights.* One white all-round navigation light has been fitted to the top of the radio mast on the centre piled structure at a height of 153 ft. above MHWS. Character: flashing every 5 seconds, visible for 18 miles: candlepower 7,400.

Red lights are fitted at the 4 extreme corners of the structure which is 1,300 ft. long. Character: fixed red visible 2 miles.

Additionally there are several aircraft warning lights (red) on various parts of the structure marking the upper extremities of towers and other erections including the central radio tower.

The channel between the entrance to the Shatt-el-Arab and the Khor-al-Amaya Sea Island Oil Terminal is marked by buoys and the Shatt-el-Arab Light Vessel (refer to relevant notices issued by the Iraqi Ports Administration, M.E.N.A.S., and Admiralty Notices to Mariners).

(b) Tides. High water at the Terminal may be expected to occur about 20 minutes before high water at the Shatt-el-Arab, Outer Bar. This may vary due to local meteorological and spate conditions. Tidal streams in the vicinity are rotatory and are not likely to exceed 2 knots. The maximum streams are generally along the berthing faces of the Terminal, but at certain states of the tide, cross sets, at right angles to the berthing faces, may be experienced. These are unlikely to exceed 0.75 knots.

DOCUMENTS:

Crew List (5 copies).
Store List (2 copies).

PILOTAGE: Compulsory. Masters of vessels bound for Khor-al-Amaya Terminal should contact the Pilot vessel which cruises in an area about 2 miles S.E. of the Terminal. They will receive instructions as to whether to lie off, anchor or proceed towards the Harbour Master's launch.

(a) All vessels using Khor-al-Amaya buoyed channel are reminded that loaded tankers outward bound from Khor-al-Amaya Terminal have top priority in navigating the buoyed channel and all other vessels are to keep clear in all cases.

(b) All inward-bound vessels are to contact Khor-al-Amaya Harbour Master on VHF Channels 16 and 14 before entering Khor-al-Amaya channel for information regarding deeply laden tankers using the restricted channel, and for berthing and anchoring instructions.

(c) Pilotage is compulsory for all inward and outward bound tankers using the Khor-al-Amaya buoyed channel when the draft of the tanker is 15.85 m. (52 ft.) or over.

(d) Tankers arriving to load at Khor-al-Amaya with draft in excess of 15.85 m. (52 ft.) must give their ETA at Shatt-el-Arab Light-vessel at least 12 hours in advance by contacting the Pilot station or Khor-al-Amaya Terminal.

ANCHORAGES: Anchorage areas have been established bounded by lines joining the following positions:

(a) *Anchorage "A"*

(i)	29° 32′ 08″ N.	48° 58′ 59″ E.	(iii)	29° 32′ 53″ N.	48° 56′ 56″ E.
(ii)	29° 31′ 24″ N.	48° 58′ 06″ E.	(iv)	29° 33′ 14″ N.	48° 57′ 20″ E.

(b) *Anchorage "B"*

(i)	29° 44′ 03″ N.	48° 49′ 34″ E.	(iii)	29° 42′ 08″ N.	48° 50 18″ E.
(ii)	29° 43′ 52″ N.	48° 49′ 12″ E.	(iv)	29° 42′ 21″ N.	48° 50′ 45″ E.

(c) *Anchorage "C"*

(i)	29° 45′ 39″ N.	48° 48′ 41″ E.	(iii)	29° 44′ 06″ N.	48° 49′ 31″ E.
(ii)	29° 44′ 28″ N.	48° 47′ 38″ E.	(iv)	29° 43′ 35″ N.	48° 48′ 28″ E.

(d) *Temporary Lightering Anchorage*

(i)	29° 46′ 00″ N.	48° 48′ 28″ E.	(iii)	29° 45′ 34″ N.	48° 46′ 35″ E.
(ii)	29° 45′ 40″ N.	48° 48′ 39″ E.	(iv)	29° 44′ 06″ N.	48° 47′ 18″ E.

Note:

(i) Anchorages "A" and "B" are for deep-draft vessels of 12.19 m. (40 ft.) and upwards.
(ii) Anchorage "C" is to be used by tankers (laden or in ballast) whose draft does not exceed 12.19 m. (40 ft.).
(iii) The temporary lightering anchorage is for the exclusive use of lighters. No other ships or vessels are to anchor within this area.

MAX. SIZE: 330,000 d.w.t. loading part cargo. Max. LOA: 1,200 ft. Max. draft, 69 ft.

HEALTH: Quarantine Officer boards after berthing. Vaccination Certificates required.

RADIO: Procedure for contacting Basrah Petroleum Company. Vessels are requested to establish contact with Basrah Petroleum Company Limited, Basrah, 48 hours prior to arrival, and to re-establish contact 48 hours after departure. Telegraphic Address: (Baspetco Basrah), (Baspetco Fao). Position: Lat. 30° 35′ 36″ N., Long. 47° 48′ 32″ E. Call sign "HNT" (FC). (a) Transmission 8,582 kHz. (b) Reception, tankers call on 8,356–8,374 and work on 8,374–8,457.5 kHz. Periods 0400–0430 hrs. 0800–0830 hrs. 1200–1230 hrs. 1600–1630 hrs. All times GMT. Services: C.V. Class of Operation: C.W. Class of Emission: A1.

Vessels should indicate their date and time of arrival, quantity of cargo required and whether in a state to receive cargo. In the event of vessels being unable to establish direct wireless contact with Basrah Petroleum Company Radio Station, messages should be passed through the Iraqi Ports Administration.

Procedure for contacting Iraqi Ports Coast Stations

1. Summary of Procedure. Whilst inside Iraqi territorial waters, ships under way will maintain watch on Channel 16 (156.80 mHz) and/or 461.5 kHz to ensure immediate reception of instructions issued by the controlling authorities.

(a) Khor Al-Amaya Radio maintains listening watch on Channel 16 (156.80 mHz).
(b) Pilot station (Al-Rasheed Radio YIBE) maintains listening watch on Channel 16 (156.80 mHz) and 500 kHz.
(c) Fao Radio (YIS) maintains listening watch on Channel 16 (156.80 mHz) and 500 kHz.
(d) Al-Wasiliyah Radio (YIT) maintains listening watch on Channel 16 (156.80 mHz) and 461.5 kHz.
(e) Basrah Control Radio (YIR) maintains listening watch on Channel 16 (156.80 mHz) and 500 kHz.
(f) Umm-Qasr Radio (YIU) maintains listening watch on Channel 16 (156.80 mHz) and 500 kHz.

II. Special Instructions.

(a) Navigational warnings are transmitted on 500 kHz by Basrah Control Radio (YIR).
(b) North Gulf weather forecast is transmitted by: 1. Basrah Control Radio on: 440 kHz at 0530, 1330 hrs. GMT and on request. 6493.25 kHz at 0530 hrs., GMT and on request. 8668 kHz at 1330 hrs., GMT and on request. 2. Khor-al-Amaya Radio on Channel 16 (156.80 mHz) at 0530, 1330 hrs. GMT and on request.
(c) Traffic Control Signals on Channel 16 (156.80 mHz) and on 500 kHz by Basrah Control Radio (YIR).
(d) Traffic Control Signals on Channel 16 (156.80 mHz) and 461.5 kHz by Al-Wasiliyah Radio (YIT).
(e) Traffic Control Signals on Channel 16 (156.80 mHz) and 500 kHz by Fao radio (YIS).
(f) Traffic Control Signals on Channel 16 (156.80 mHz) and 500 kHz by Umm-Qasr Radio (YIU).
(g) Traffic Control Signals on Channel 16 (156.80 mHz) by Khor-al-Amaya Radio.

III. Commercial and Public Correspondence. Call Basrah Radio (YIR) on Channel 16 (156.80 mHz), 500 kHz, 4, 6, 8, 12 and 16 mHz bands, and after initial contact has been established change to one of the working frequencies as instructed to pass messages.

Frequencies instruction to pass messages time table 1200–1400 hrs. listen on 8354–8374 answer on 8668 traffic lists 1305.

Note. All messages are changeable except those concerning navigational aids, distress, pratique and medical advice messages.

TUGS: 3 tugs of 4,000 b.h.p. are available to assist in berthing and unberthing.

BERTHING: The Terminal consists of a piled structure, in 22 m. of water, having 1 tanker berth on one side and 2 berths on the other side with suitable mooring dolphins and platforms ahead and astern which are connected by cat-walks. The orientation is 320°/140°. The max. loading rate, with only 1 berth in use, is 9,000 t.p.h.; with 2 berths in use the max. loading rate at each is 4,500 t.p.h. Fire-fighting towers are provided, also a helicopter platform. Loading by "Woodfield" flow booms offering 4×16 in. and 2 or 4, 12-in. hoses. Vessels of the order of 120,000 d.w.t. can be accepted at berths 5 and 6 and 330,000 d.w.t. max. draft 21 m. at berth No. 7.

The S.G. and A.P.I. and temperature of the crude oil will be supplied to the Master on radio request.

Berthing of tankers: MENAS NOTICE No. 114/74.

No tanker of draft exceeding 17.68 m. (58 ft.) shall be permitted to berth or unberth at the existing Wharf No. 7 in the N.W. Direction.

No tanker of draft exceeding 17.00 m. (56 ft.) shall be permitted to berth at Wharf No. 7 and in the S.E. Direction.

No tanker of draft exceeding 17.68 m. (58 ft.) shall be permitted to berth at the proposed Wharf No. 8 and in the N.W. Direction.

No tanker of draft exceeding 17.00 m. (56 ft.) shall be permitted to berth at the proposed wharf No. 8 and in the S.E. Direction.

MEDICAL: An Iraqi Ports Administration Medical Dresser will always be available to attend to quarantine matters, deratisation certificates, etc. A doctor can be made available, through vessel's Agent, upon prior request, but necessary to give 24 hours notice to arrange.

FRESH WATER: Available with 24 hours notice.

FUEL: Not available ex-wharf.

CUSTOMS ALLOWANCES: During vessel's stay at Terminal, 1 carton of cigarettes only allowed to each crew member.

SAFETY REGULATIONS: Safety regulations and fire fighting procedures will be discussed with the Master on arrival.

GANGWAYS: Ships must supply their own gangways when alongside. Accommodation ladders and other ship side ladders are not suitable.

REPAIRS: Basrah Petroleum Company has no facilities to undertake ship repair work of any description.

AUTHORITY: President, State Organisation of Iraqi Ports, Basrah.

AGENCY: Masters of tankers should contact the Agent through Basrah Radio Station prior to arrival. Agent's representatives are not housed on the island. Ship's documents for port clearance purposes are passed by them to the Agent for action. Stores and provisions will be sent out by the Agent, given sufficient prior notice.

See "General" before first port.

NOTES

Please also advise Shipping Guides Ltd.

Republic of Ireland

BANTRY BAY: 51.41 N. 09.27 W. (See Plan Book)

DOCUMENTS:
1 Crew List.
1 Stores List.
1 Crew Declaration.
1 Maritime Health Declaration.
Ship's Register (tonnage).
British Light Dues (receipts).
Clearance from Last Port.

APPROACHES: The approaches to the Bay are marked by the Sheep Head Light, visible 18 miles, Roancarrig More Light, visible 12 miles, and Whiddy Island Light, visible 3 miles.

The channel to the Gulf Oil Terminal is marked by radar reflecting buoys numbered 1 to 9, the starboard hand buoys having odd numbers.

The buoys marking the channel to the Inner Harbour do not have radar reflectors, but can easily be picked up on radar screens.

PILOTAGE: Pilot can be requested through Land's End Radio or Valentia Radio to "Harbour Master Bantry", giving 6 hours notice. Also through VHF Channels 11, 14 and 16 to Gulf Control when within 10 miles. Pilot boat blue and white fast motor launch (28 ft.) flying Pilot flag from stern.

For tankers of 250,000 tons and upwards, Pilot boards between No. 2 and No. 3 buoys.

For all other vessels, Pilot boards at West Ground Buoy.

ANCHORAGE: For tankers of 250,000 to 350,000 tons in vicinity of No. 2 Buoy.

For tankers of 45,000 tons in vicinity of No. 5 buoy.

All other large vessels, South of No. 5 buoy at mouth of Glengarritt Harbour. For smaller vessels, the East end of Whiddy Island (10 fathoms) and Bantry Harbour (25 ft. depth).

MAX. SIZE: (a) Oil Terminal – up to 500,000 tons with draft up to 96 ft.

(b) Bantry Harbour – draft not more than 25 ft.

(c) Bantry Pier – 150 ft. length with draft 12 ft.

HEALTH: All vessels must exhibit quarantine signals until quarantine formalities completed or free pratique granted. By day, International Code Flag "Q"; by night, red light over white light.

No person other than Pilot is allowed to board any vessel either alongside jetty or at anchorage until pratique has been granted. Pilot to be informed when any suspected disease or fever on board.

RADIO: Messages and ETAs through Valentia Radio, Land's End or any UK station. Port Operation (Gulf) Service, call sign "Gulf Control" (24 hours) VHF Channels 11, 14 and 16.

TUGS: Four tugs of 3,200 h.p. serve Oil Terminal. Two tugs of 300 h.p. available in Inner Harbour. Tugs' lines used.

BERTHING: Allowed at all stages of tide at Oil Terminal Jetty, depending on weather conditions.

Berthing at Bantry Pier depends on size of vessel and state of tide.

GULF OIL TERMINAL: Tankers berth alongside island jetty 1,600 ft. in length situated approximately 1,300 ft. offshore. The Island is comprised of a central loading platform with connected mooring dolphins. The outside berth designed for tankers up to 500,000 d.w.t. with max. draft of 96 ft. The inside (South) berth can accommodate vessels up to 85,000 d.w.t. with max. draft of 85 ft.

Outside berth fitted with 16-in. cargo lines.

Inside berth fitted with 12-in. cargo lines.

All bunker lines are 12-in. diameter.

BALLAST: There is strict enforcement of law against oil pollution. All ballast must be discharged ashore at terminal, where 16-in. ballast lines available to shore.

STEVEDORES: Available; 24 hour advance notice to Agent required.

MEDICAL: 24 hour standby launch available if vessel enters Bantry Bay for medical attention to crew. Vessels should give instructions whether doctor needed on board. Vessel should pass ETA through Valentia Radio to "Harbour Master Bantry". Or if in VHF range (50 miles) ETA to "Gulf Control" on Channel 14.

FRESH WATER: Available at Bantry Pier.

FUEL: Gas oil and heavy fuel for tankers available at Oil Terminal. Gas oil and fuel available at Bantry Pier in road tenders of 20 tons.

REPAIRS: Local repair firms can undertake limited repairs, but nearest dockyard available for major repairs is at Cork.

DENSITY: 1025.

CUSTOMS ALLOWANCES: Tobacco: Depending on stay in port. Approximately 80 to 100 cigarettes per man for 2 to 3 days. Wine and/or Spirits: half litre per man.

IDENTIFICATION CARDS: Required.

REPATRIATION: There are facilities for crew repatriation.

CONSULS: No local representatives.

AIRPORT: Situated 48 miles away at Cork. Frequent International flights.

TIME: GMT plus 1 hour during Summer months. GMT from October to March.

HOLIDAYS: Cargo work can be carried out on most holidays, except Christmas.

POLICE/AMBULANCE/FIRE: Call local exchange.

TELEPHONES: No arrangements for placing telephones on board.

SHORE LEAVE: Permitted. Liberty launch available for tankers at 1 hour's notice.

SERVICES: Vessels requiring any of the following services should advise Agent prior to arrival, giving fullest possible details:

Divers: Services of divers available to vessels for inspection and freeing fouled propellers.

Provisions: Normal supplies of most categories available. Ample time should be given to ship chandler.

Laundry: Large amounts sent to Cork (24 hrs. return service), but rather expensive.

GENERAL: All vessels required to fly Irish Ensign on foremast during daylight hours. Irish territorial waters extend 12 miles seaward from mainland.

AUTHORITY: Harbour Master.

CASTLETOWNBERE: 51.41 N. 09.54 W. (See Plan Book)

DOCUMENTS:
Health Certificate.
Crew List.
List of Bonds.
Ship's Register.
Log Book.
Crew Passports.

PILOTAGE: No recognised Pilot; Pilot can be contacted through a Harbour Master.

ANCHORAGE: See Charts: 13 ft. available at MLWST.

MAX. SIZE: Max. permissible draft 12 ft. and 16 ft. at mainland wharf. 17 ft. at Dinish Island Quay.

HEALTH: Customs give pratique if ship clear; if not, Doctor will be notified.

RADIO: Land's End and Valentia.

TUGS: No tugs.

BERTHING: In accordance with a Harbour Master's instructions.

STEVEDORES: No stevedoring arrangements.

MEDICAL: No advance notice necessary. Hospital facilities available.

FRESH WATER: Available at quay.

FUEL: Diesel available at quay; no advance notice necessary.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Done by crew.

CUSTOMS ALLOWANCE: Tobacco: Captain 8 oz. Officers 6 oz. Crew 4 oz. Wine and/or Spirits: Captain: 1 gal. wine, 1 gal. beer and 1 pint spirits. Officers: 1 gal. wine, 1 gal. beer and 1 pint spirits. Crew: 1 gal. beer or 1 gal. wine and 1 pint spirits.

IDENTIFICATION CARDS: Required.

AIRPORT: 80 miles to Cork Airport, served by regular airlines.

TIME: GMT plus 1 hour. Reverting to GMT from October to March.

HOLIDAYS: Cargo work can be arranged on all holidays.

POLICE/AMBULANCE/FIRE: Police Castletownbere 2; Ambulance Castletownbere 4; Fire Castletownbere 49.

TELEPHONES: Not available for placing on board.

SHORE LEAVE: Allowed.

AUTHORITY: Ministry of Fisheries and Forestry, Dublin.

CORK (including Cobh, Whitegate): 51.50 N. 08.17 W. (See Plan Book)

PORT LIMITS: Line joining Cork Head and Power Head.

DOCUMENTS:
3 Crew Lists.
2 Passenger Lists.
1 Health Declaration.
3 Customs Manifests.

For shore formalities
Ship's Register.
Safety Equipment Certificate.
Safety Radio Certificate.
Load Line Certificate.
Light Dues Certificates.
Deratisation Certificate.

PILOTAGE. Minimum 24 hours notice of ETA and draft to Agent. Accurate ETA's are vital as Pilots only go afloat on this basis. When within VHF range, contact should be established through "Cork Harbour Radio" (see "Radio"). This station combines Port Operations and Information service and co-ordinates the pilotage service. The pilot launches are also fitted with VHF. Channels 6, 12 and 16.

For large deep-drafted vessels, Pilot usually boards up to 2 or 3 miles South of Roches Point. Compulsory river pilotage area extends upstream from Spit Bank Light.

ANCHORAGES: Safe deep-water anchorages as arranged with Pilots.

RESTRICTIONS: Navigation by night and day. Ships of 5.4 m. draft can make passage of river to Cork at any stage of tide.

MAX. SIZE: *Cork:* Max. length 152 m. extendable to 158 m. at discretion of Harbour Master. Draft fresh water on spring tides 8.7 m. on neap tides 7.8 m.

Whitegate: Tankers up to 275 m. length. 11.6 m. draft. Max. draft 12 m. at highest tides.

HEALTH: Health Declaration form is presented to Customs Officer or Port Health Inspector and pratique issued without delay. In cases of disease on board notify Agents who inform Health Authorities.

RADIO: Coast Station – Valentia Radio. W/T and R/T. R/T link call facilities available. Telex fitted. In U.K., Coast Stations also relay messages direct to Agents.

VHF: Harbour Radio: VHF Channels 12, 14 and 16, 24 hour watch maintained. Call sign "Cork Harbour Radio". A port operations and information service is provided and it is through this organisation that the requirements of the Harbour Master will be made known.

Vessels underway are required to maintain a VHF watch on Channel 12 or 14 as instructed.

TUGS: Deep draft vessels take tug assistance from Horse Head to Cork and vice versa. Tug's lines are used. Tankers use two to four tugs for berthing at Whitegate Terminal.

BERTHING: The quays at Cork afford good accommodation for vessels up to 152 m. LOA, on fresh water drafts of 7.8 m. on Mean Neap tides and 8.7 m. on Mean Spring tides with 8.8 m. alongside quay. The Deep Water Quay at Cobh is 189 m. long and vessels of 5.5 m. draft can berth with safety.

SPECIAL CARGO FACILITIES:

Grain: Two mobile suction discharge plants, combined discharge rate up to 240 t.p.h. Max. ship size 152 m. LOA, 8.7 m. draft on spring tide. Storage capacity 80,000 tons.

Ore: One mobile loading conveyor, max. rate 250 t.p.h. Max. ship size 152 m. LOA, 8.7 m. draft on spring tides. Conveyor system used in conjunction with mobile cranes for discharging of vessel up to 5,000 d.w.t.

Coal/Fertiliser/Sulphur: Four 6 ton level luffing grab cranes combined discharge rate up to 360 t.p.h. Max. ship size 152 m. LOA, 8.7 m. draft.

Containers: 30 ton travelling transporter crane. Length of berth 122 m. Max. depth at LWOST 5.5 m.

Roll-on/Roll-off and Passenger Car Ferry Terminal: Max. height of link span 8.6 m. above LWOST. Min. height of link span 2.7 m. above LWOST. Max. loading 65 tons. Distance from side of berth to centre line of link span 11.4 m. Max. ship size 137 m. LOA. Berth dredged to 5.2 m. L.A.T.

Livestock loading Ramp and Lairage: Max. ship size 106.7 m. plus LOA. Berth dredged to 5.2 m. L.A.T.

Pfizer Jetty: Length between dolphins 259.2 m. Max. draft 10 m. on all tides.

Molasses discharge rate, 1,000 t.p.h.
Fuel Oil discharge rate, 600 t.p.h.
Sulphuric Acid discharge rate, 200 t.p.h.

STEVEDORES: Labour hiring times. Week-days 0800, 1000 and 1130 hrs. Gangs for week-end working must be hired at 1700 hours on Fridays. ETA advice could include number of gangs workable.

MEDICAL: All medical and hospital services available at short notice.

TANKERS: Irish Refining Co. Terminal at Whitegate is situated on East side of Lower Harbour. Two deep water berths for tankers. Max. size, 55,000 d.w.t. or 90,000 d.w.t. partly laden. Slop reception facilities available.

Length between dolphins, 366 m.
Crude discharge rate up to 4,000 t.p.h.
HOF loading rate up to 1,700 t.p.h.
Gas Oil loading rate up to 700 t.p.h.
Petrol loading rate up to 600 t.p.h.
LPG loading rate up to 20 t.p.h.

Diameter of Hoses:
Berth No. 1: Crude and Black Oils 10 in. ASA.
Clean Products 8 in. ASA.
Berth No. 2: All Products 6 in. ASA.

DENSITY: Average density of water in river 1008.

FRESH WATER: Available at all quays ex hydrants – delivery rate 25 t.p.h.

FUEL: All fuels with exception marine diesel oil available. 24 hours notice required. Delivery by either road or river tanker.

DEVELOPMENTS:

N.E.T. (Nitrigen Eireann Teo.). Jetty under construction in 1977/8 at Marino Point. Overall length dolphin to dolphin 375 m. Dredged to 10.6 m. to accommodate Ammonia tankers of up to 15,000 d.w.t. and bulk or general cargo vessels of up to 25,000 d.w.t. (Partly loaded). Vessels of up to 186 m. OAL and 9.5 m. draft will be acceptable.

A major harbour development scheme is at present in progress aimed at providing certain infrastructural facilities in advance of demand as a means of attracting port related industry to the harbour. By mid 1978 work had been completed on the deepening of the harbour's entrance to 13.4 m. L.A.T. thereby providing accommodation for vessels of 90,000/100,000 d.w.t. in the Whitegate/Aghada area and an inner bar had been deepened to 11.1 m. L.A.T. to permit vessels of up to 50,000 d.w.t. to proceed to the Commissioners prime development area at Ringaskiddy. Work on the digging out of a deepwater berth and on the reclamation of approximately 150 acres of land is due to commence in late Summer or early Autumn 1978 and construction of a roll-on/roll-off ferry terminal and a deepwater berth for vessels of 50,000 d.w.t. will commence towards the end of 1979.

The ferry terminal will be operational by the end of 1980 and the deepwater berth will be operational a few months later.

In addition to the marine development, Cork County Council is in the course of providing a new fresh water supply scheme which, in time, will provide up to thirty million gallons per day in the Ringaskiddy area. In addition the Industrial Development Authority has purchased 1,000 acres of land at Ringaskiddy for port industry.

The industrial package being so provided will ensure that in a little over 2 years Cork Harbour will be in the forefront of prime industrial locations within the European Economic Community.

The Kinsale Head gasfield, located 30 miles due South of Cork Harbour, is due to go into production in late Summer/early Autumn 1978. The gas will be used in a new 270 m.w. power station at present under construction, in an ammonia/urea plant also under construction, in an existing power station and in the Cork city town gas system.

Dredging and reclamation of a new deepwater marine terminal at Ringaskiddy will commence in 1978. Berth construction is scheduled for 1980 with provision initially for one 50,000 d.w.t. Bulk Carrier and a new Ro-Ro Ferry Terminal. Basin will be dredged to depth of 11.7 m. L.A.T.

WATCHMEN: Recommended but not compulsory.

OPENING/CLOSING HATCHES: Crew must perform this work as dockers decline to do it.

CUSTOMS ALLOWANCES: 200 cigarettes per man, and 1 bottle spirits per man.

CARGO GEAR: No special local requirements. Regulations similar to British Board of Trade safe working requirements. 30 ton crane available.

IDENTIFICATION CARDS: Not required.

CONSULS: *France, Sweden, Norway, Netherlands:* B.A. Gotto, c/o James Scott & Co., Glanmire House, Lower Glanmire Road, Cork. Telephone No. 54200. *Finland, Denmark:* J. C. Hannigan, c/o James Scott & Co., Glanmire House, Lower Glanmire Road, Cork. 54200. *Belgium:* G. Jones, 33 St. Patrick's Quay, Cork. 54018. *Italy:* P. Cali, University College, Cork. 26871. *Germany:* T. J. Clifford, Cooper & Lybrand, South Mall, Cork. 21552.

REPAIRS: All types of deck and engine repair facilities available.

DRY DOCK: Verolme Cork dockyard main dry dock can take vessels up to 158.5 m. in length. Floating docks of 2,000 and 10,800 tons lifting capacity, also four 40 ton cranes. Able to carry out repairs to ships afloat of any tonnage using the port.

SURVEYORS: Lloyd's surveyor at Cork.

REPATRIATION: Can be carried out without difficulty.

AIRPORT: Five miles from city. Regular flights twice daily to London. Onward connections to all destinations.

TIME: GMT from 0200 hrs. on Sunday following 3rd Saturday in October to 0200 hrs. on Sunday following 3rd Saturday in March (unless latter is Easter Saturday, in which case to 0200 hrs. on Sunday following 2nd Saturday in March).

One hour ahead on GMT (i.e. Standard European time) for remainder of year.

HOLIDAYS: New Years Day, St. Patrick's Day (March 17th); Good Friday; Easter Monday; First Monday in June; First Monday in August; Christmas Day (December 25th); St. Stephen's Day (December 26th).

POLICE/AMBULANCE/FIRE: 999 is emergency number for all services. Actual: Police 23161; Fire 21107; Ambulance 21107.

SERVICES: All tanker services available at Whitegate. Otherwise, various general services required by ships available at Cork.

SHORE LEAVE: No restrictions on shore leave.

DELAYS: Except waiting for tide there are very few occasions on which entry to or departure from the port is subject to delay.

AUTHORITY: Cork Harbour Commissioners.

DUBLIN: 53.21 N. 06.15 W. (See Plan Book)

PORT LIMITS: Port of Dublin includes all water between Rory O'More Bridge (over River Liffey) and imaginary line drawn from Martello Tower at Sutton on North side of Dublin Bay to Sorrento Point at Dalkey on South side, but excluding Dun Laoghaire Harbour.

DOCUMENTS:

Forms C. 1 or C. 2 Customs report form (actually a copy of Manifest).
Form CU. 35 Victualling Bill (note covering Bonded Stores to be loaded Dublin).
Form CU. 7 Entry Outwards in ballast (for vessels sailing light).
Form CU. 10 Entry Outwards with cargo.
Form CU. 25 Entry Outwards (details of previous and forthcoming voyages.
Health Form.
"Jerque" Note (list of bonded stores on board on arrival).

Crew List must also be presented with personal declarations of dutiable possessions (i.e. radios; T.V.s; record players, etc.).

PILOTAGE: Limits of Dublin Pilotage District are waters of River Liffey between Butt Bridge and of sea Westward of Sixth Meridian between parallels of latitude passing through Bailey Lighthouse on North and through Sorrento Point on South including all bays, creeks and harbours and all tidal and closed docks within such area. Following classes of ships exempted from compulsory pilotage if not carrying passengers:

(1) Ships trading coastwise of not more than 200 tons gross tonnage.
(2) Home trade ships (including ships trading coastwise), of not more than 450 tons gross tonnage, excluding ships carrying petroleum or explosive cargo.

Incoming Vessels: Pilots board incoming ships from black-hulled pilot cutter in Dublin Bay. Cutter only cruises when vessels are expected, and accurate ETA requested to avoid delay.

ETAs should be given 12 hours before arrival and amendments may be made up to 2 hours before original ETA.

ETAs and any subsequent amendments should be passed by radiotelephone (VHF Channel 16; call sign Dublin Harbour Office) or radiotelegram to "Harmaster Dublin".

Holders of Dublin Pilotage Certificates should indicate this by flashing single letter signal "C" when approaching pilotage area between sunset and sunrise.

Vessels Outward Bound or Shifting: Order for Pilot should be made early as possible through Harbour Office Tel. 748771 or Telex No. 5476 during office hours; and Tel. 48772 outside office hours. Following details should be given: name and situation of vessel, destination, draft, time of departure. It must be stressed that such orders must be made in sufficent time making due allowance, particularly at night, for accessibility of vessel.

ANCHORAGES: Scotch Bay – S.E. Dublin Bay and just East of Dun Laoghaire 6/10 fathoms at low water.

RESTRICTIONS: Draft restrictions: 30 ft. HW Neap Tides; 30 ft 6in. HW Normal TIdes; 31 ft. 6 in. HW Spring Tides. Vessels less than 400 ft. overall, drawing 20 ft. 6 in. or less can enter at any state of tide.

ENTRANCE: Approach well lighted and easy of access. Inner Channel of Harbour, formed by almost straight channel of River Liffey from entrance at Poolbeg Lighthouse to Alexandra Basin, is 800 ft. wide for greater part of length and maintained at depth of 27 ft. LW. From Alexandra Basin entrance, River is quayed for a distance of nearly 2 miles to Butt Bridge in centre of City.

MAX. SIZE: State of tide governing max. draft, but no length or breadth restrictions.

HEALTH: Pratique automatic for movements Ireland/U.K. area. Maritime Declaration of Health indicates requirements. This declaration must be submitted on arrival by master of ship coming from foreign port. This requirement does not now normally apply to vessels trading *solely* between the Republic and ports in West Germany, Belgium and Netherlands, Atlantic and Mediterranean coast of France, Italy and Greece. Other requirements mentioned on Maritime Declaration of Health form still apply to such ships.

"Foreign Port" is port situated elsewhere than Eire, Northern Ireland, Great Britain, Isle of Man, or Channel Islands.

Master of foreign-going ship may be asked to produce valid Derating Certificate or Derating Exemption Certificate in respect of vessel. Travellers (passengers and crew) may be requested to produce valid certificates of vaccination against smallpox if from an infected local area, or if from countries in Africa, Asia, North and South America. This requirement does not apply to arrivals from Azores, Bermuda, Canada, Canary Islands, Madeira, French Guiana, Guadeloupe, Martinique, Greenland, Suriname, Netherlands – Antilles, United States of America. Ships may be subjected to sanitary inspection by inspectors of Port Health Service.

Swill must not be landed from vessels which trade outside Eire.

Granting of pratique by radio not practised at Dublin, But is under consideration at present.

RADIO: Valentia Radio, Ireland. Portishead Radio, U.K. Anglesea Radio, U.K.

TUGS: Normally meet vessels at North Bank Lighthouse (roughly half-way mark of main channel) 1 mile West of Poolbeg Lighthouse. Tugs rope optional.

BERTHING: Customs House Docks – from 2 hours to one half hour before high water. Otherwise no restrictions.

The area available for shipping extends from Eastern Breakwater to Butt Bridge and inclusive of Alexandra Basin, Alexandra Basin Extension, Custom House Docks and Grand Canal Docks; it is 227 acres in extent.

North Side of the River, from Butt Bridge to North Wall Light, available as berthage 7,529 ft., depth LW 9 to 22 ft.

South Side of the River, from Butt Bridge to Ringsend Gut, available as berthage 5,728 ft., depth LW 16 to 22 ft.

South Bank Quay serving Electricity Supply Board's Ringsend Power Station, 700 ft., depth LW 28 ft. Two transporter cranes of 5 tons each for discharge of coal, and pipe-lines for discharge of oil.

Alexandra Basin. Quays on *South* and *West* sides 2,690 ft., depth LW 24 to 26 ft.

Alexandra Quay West on North side of Alexandra Basin, 1,230 ft., depth LW 32 ft.

Alexandra Quay East, 1,200 ft., depth LW 32 ft.

Alexandra Basin East comprises East side Ocean Pier, Alexandra Quay East and East and West Oil Jetties.

Fertilizer Jetty in Alexandra Basin has a main section of 750 ft. used for bulk cargoes, depth LW 31 ft. with provision for deepening, equipped with pipe-lines for liquid sulphur and ammonia; conveyor and 2 electric cranes of 10 tons each for rock phosphate and potash in bulk. 300 ft. long approach section leading to main jetty (with special facilities for working acids and ammonia and loading out grain) for accommodation of smaller bulk vessels.

Ocean Pier West at Eastern end of Alexandra Basin, 1,372 ft., depth LW 32 ft.

Ocean Pier South at Eastern side of Alexandra Basin entrance, 467 ft., depth LW 32 ft.

Ocean Pier East, 800 ft., depth LW 32 ft.

STEVEDORES: ETA required by Stevedores before 1500 hrs. Monday to Thursday for work the following day, and by 1500 hrs. Friday for work Saturday, Sunday or Monday.

Average discharge rates: *Grain:* 3,000 tons per day. *Timber:* 30 standards loose per gang/day. 120 standards packaged per gang/day. *General:* Bagged cargo and fast general, including paper, 250 tons per gang/day. *Other Generals:* 90 tons per gang/day.

TANKERS: No slop residue discharge facilities.

Tanker Berths	*Max. Draft*
No. 1, West Oil Jetty, West Side	31 ft.*
No. 2, West Oil Jetty, East Side	31 ft.*
No. 3, East Oil Jetty, West Side	31 ft.*
No. 4, East Oil Jetty, East Side	19 ft.
South Bank Quay (E.S.B.)	27 ft. 6 in.*
South Bank Quay (Poolbeg)	35 ft.*

*Time suitable for navigation in approaches – 1 hour before High Water.

Common User Oil Pipe-line System: This system provides 5 pipe-lines to Eastern Oil Jetty and 7 pipe-lines to Western Oil Jetty. Cargoes of tankers berthed at these jetties can be discharged to storage installations of any of the oil companies.

E.S.B. (Electricity Supply Board): At Poolbeg Jetty (formerly known as "Pigeon House 'B' Jetty"). Max. size 35,000 d.w.t. with the aid of tugs. Present depth sufficient for vessels of this size.

DENSITY: 1025 at all stages of tide.

FRESH WATER: Available at all berths by 2.5 in. hoseline – 8/10,000 gal. per hour per hydrant.

FUEL:

Grades of Fuel Oil	*Viscosities*
Heavy Fuel Oil	3,500 sec. max.
Inter. Fuel Oil	1,500 sec. max.
Medium Fuel Oil	950 sec. max.
Light Fuel Oil	200 sec max.

Advance Notice required. Bunkering by pipe-line depends on availability of Oil Berth. Bunkering by Oil Barge normally a.m. notice on day required. Bunkering by Road Tanker – 24 hours notice.

FIRE PRECAUTIONS: Port By-Laws; Harbour Master's orders/Letters to Masters. Ref.: Board of Trade "Carriage of Dangerous Goods in Ships" and Aeby "Dangerous Goods".

Packed Petroleum: Small consignments (7,000 gal. max.) Class A product – must be removed from port area ex-ship, or to special compound. Class B or Class C may be permitted on quays after check for leaks.

Fibrous Cargoes: See Directives No. 2 and 3 to Masters. Jute, hemp and sisal must be removed ex-ship from port area.

Cotton, cocoa fibre, kapok, etc., must be removed ex-ship to Hazardous Goods Shed.

General: Harbour Police-Watch obligatory during handling of all hazardous or inflamable cargoes, and on tankers during vessels' stay in port. No smoking permitted in Oil Zone, sheds, etc.

GANGWAY/DECK WATCHMEN: If no watchmen from crew, then shore watchman is recommended.

OPENING/CLOSING HATCHES: Patent hatches by crew; other hatches with some assistance from dockers.

CERTIFICATES:

Certificate of Registry.
Radio Safety Certificate.
Load Line Certificate.
Current Trinity House light bills.
Safety Equipment Certificate.

CUSTOMS ALLOWANCE: Tobacco per 8 days: 200 cigarettes – Master; 150 cigarettes – Officers; 100 cigarettes – Crew. Wine and/or Spirits: quarter pint per day per man.

CONSULS:

Brazil: P. J. Murphy, Honorary Consulate of Brazil, Shottery, Killiney, Co. Dublin. Tel. 851971.

Denmark: Office address, Royal Danish Consulate General, Hainault House, 69/71 St. Stephen's Green, Dublin 2. Tel. 760122.
Honorary Consul General: Jorgen H. Tholstrup.

Dominican Republic: 49 Upper Mount Street, Dublin 2.
Honorary Consul: Dr. J. I. Fitzpatrick

Finland: *Honorary Consul General:* John Donnelly, F.C.A., B.L., Gardner Donnelly and Co., 65 Fitzwilliam Square, Dublin 2. Tel. 765153.

Greece: North British and Mercantile Buildings, 32 Nassau Street, Dublin 2.
Honorary Consul: Cecil D. Mooney.
Honorary Vice-Consul: Douglas T. Figgis.

Iceland: *Honorary Consul General:* Thomas P. Hogan, 6 Monkstown Avenue, Co. Dublin. Tel. 808103.

Latvia: *Honorary Consul:* John F. Foley, 51 South Mall, Cork.

Mexico: *Honorary Consul:* Don McGreevy, Building Centre, 17 Lr. Baggot Street, Dublin 2. Tel. 762745.

Monaco: *Honorary Consul General:* The Lord Killanin, 30 Lansdowne Road, Dublin 4. Tel. 763362.
Honorary Consul: A. G. Quirke, Albest Lodge, Dublin 4.

Norway: *Honorary Consul:* John Guinness, 17 College Green, Dublin 2. Tel. 782444.

Panama: *Honorary Consul:* Gene Kruger, Gresham Hotel, Upper O'Connell Street, Dublin 1.
Honorary Vice-Consul: Paul J. Byrne, Panamanian Consulate, 20 Eden Quay, Dublin 1. Tel. 747867.

Peru: *Consul General:* D. T. Figgis, Peruvian Consulate General, Clyde House, Clyde Road, Dublin 4.

Philippines: W. Sandys, Consulate of the Philippines, 18/21 St. Stephen's Green, Dublin 2.

South Africa: *Honorary Trade Commissioner:* N. P. McEvoy, 4 Mary's Abbey, Dublin 7. Tel. 47372.

Turkey: *Honorary Consul General:* William Anderson, Turkish Consulate, 5 Clyde Road, Dublin 4. Tel. 758721.

REPAIRS: All classes of repairs carried out by Liffey Dockyard Ltd.

DRY DOCKS: Graving Dock No. 1: Length overall 412 ft.; width at entrance 70 ft.; depth over sill at HWOST 17 ft. 9 in., depth over blocks at HWOST 15 ft. 6 in. Equipment – one 6 ton EP crane.

Graving Dock No. 2: Inside length with caisson gate in: Extreme outer position 663 ft.; normal outer position 637 ft. Centre position 367 ft.; inner position 257 ft. Width at entrance 80 ft.; depth over sill at HWOST 25 ft. 6 in. Depth over blocks at HWOST 23 ft.

The intermediate positions for the caisson gates make it possible to operate inner section so as to accommodate a small or medium-size vessel independently of remainder of dock.

Equipment: One E.P. crane, 25 tons at 72 ft. radius to 5 tons at 100 ft. radius. Seven power capstans of 5, 10 and 15 tons pull. Fresh and salt water hydrants at dock sides.

Patent slips: No. 1 – Length of cradle 76 ft. for vessels up to 200 tons displacement. No. 2 – Length of cradle 106 ft. for vessels up to 900 tons displacement.

REPATRIATION: May be arranged by ship's Agent through Department of Justice.

AIRPORT: Dublin Airport, 6 miles North of city centre, served by regular services direct to U.K., Europe, U.S.A. and Canada.

TIME: GMT plus 1 hour. Reverting to GMT between October and March.

HOLIDAYS: New Year's Day (1st January); St. Patrick's Day (National Holiday) (17th March); Good Friday*; Easter Monday†; Spring Bank Holiday† (1st Monday in June); August Bank Holiday† (1st Monday in August); Christmas Eve, half holiday (24th December); Christmas Day (25th December); St. Stephen's Day (26th December).

*Not a port holiday, but all other offices closed.

†These days can be worked at Sunday rates and conditions.

POLICE/AMBULANCE/FIRE: Contact Harbour Police patrol or at Dock Gates, or dial 999 on public telephone for all emergency services.

TELEPHONES: Coin-box telephones available on request at Oil Berths. No rental charges; normal coin-box rates.

GENERAL: Masters' cash requirements for week-end must be notified to Agent by noon on Friday.

SERVICES: No facilities for tank cleaning or discharge of tank washings.

SHORE LEAVE: No port restriction on crew's shore leave.

AUTHORITY: Dublin Port and Docks Board.

DUN LAOGHAIRE: 53.18 N. 06.07 W. (See Plan Book)

PORT LIMITS: As defined by Dublin port and docks Board, as ships have to pass through their pilotage area. The limits of Dun Laoghaire Harbour are defined in its bye-laws as per its fairway extending beyond its pierheads.

DOCUMENTS: See "Dublin".

PILOTAGE: See "Dublin".

ANCHORAGES: See "Irish Coast Pilot".

RESTRICTIONS: See "Irish Coast Pilot".

MAX. SIZE: Fairway dredged to 5.4 m.

HEALTH: See "Dublin".

RADIO: See "Dublin".

VHF: British Rail operate channels 14 and 16 when their vessels approach the port. The Harbour Office does not have VHF.

TUGS: None.

BERTHING: Harbour formed by 2 breakwaters, East breakwater length 4,230 ft. West breakwater, length 5,080 ft. Width at entrance between breakwaters, 760 ft. Depth at entrance 6.2 m. – 7.9 m.

	Length m.	*Depth* m.
Mail Boat Pier, E. side	139+24*	5.4
Mail Boat Pier, W. side	130+24*	5.4
Car Ferry Pier, E. and W. side	142+11*	5.4
Traders Wharf, outside	149	3.7
Traders Wharf, inner side	131	2.7

**Note:* These piers are rounded at the seaward end.

The lengths given for the berths are the straight edge of the pier, the extra length given is the additional length continued along the straight line that meets the tangent to the pier.

CRANES: One 2 ton and one 5 ton crane, available for fitting out yachts near Traders Wharf.

SPECIALISED CARGO HANDLING FACILITIES: Three Ro/Ro ramps. Ramps are to M.O.T. loading requirements, width of ramps – 3 m.

BRIDGES: None.

STEVEDORES: None. British Rail arrange gangs.

MEDICAL: See "Dublin".

DENSITY: 1025.

FRESH WATER: Available at all berths.

FUEL: Arranged by Agent.

FIRE PRECAUTIONS: Only usual non-smoking precautions.

CONSULS: See "Dublin".

REPAIRS: See "Dublin".

DRY DOCKS: See "Dublin".

SURVEYORS: As per Lloyd's Shipping Agents, Dublin.

GANGWAY/DOCK WATCHMEN: The ship's watch.

CUSTOMS ALLOWANCES: As per E.E.C. regulations.

REPATRIATION: See "Dublin".

AIRPORT: Dublin Airport (Collinstown) 20 km.

TIME: As United Kingdom.

HOLIDAYS: Eight (8) Bank Holidays each year.

POLICE/AMBULANCE/FIRE: Available locally. Police, Tel. 801285 Fire Brigade and Ambulance, Tel. 801903.

TELEPHONES: None on board visiting ships.

SERVICES: None.

SHORE LEAVE: Possible, Seamen's I.D. card sufficient, shore passes are not issued.

REGULATIONS: Nothing unusual.

DELAYS: There are no delays.

DEVELOPMENT: None in foreseeable future.

AUTHORITY: Commissioners of Public Works, Dublin 2.

GALWAY: 53.16 N. 09.03 W. (See Plan Book)

DOCUMENTS:

1 Crew List (official form).
1 Passenger List (official form).
1 List of Articles (dutiable) in Possession of Crew (official form).
1 Stores List (to include bonded surplus stores for seal, firearms, ammunition, animals, radio transmitting and receiving sets) (unofficial form).
Maritime Declaration of Health (official form).

Documents, etc., required by Agent for Customs Purposes:

Ship's Register.
Load Line and Safety Certificates, etc.
Receipt for previous payments of light dues if any.

PILOTAGE: Pilots board incoming vessels only at "tide times" (approx. 2.5 hours before HW until HW); vessels arriving at times outside this period should anchor and await Pilot. Safe anchorages at inner roadstead or near Margaretta Buoy according to tonnage and draft, Pilot will board at either. Application for Pilot should be to Agent with notice of ETA. International light and sound signals may be used.

ANCHORAGES: During S.W. gales safest anchorage is at Black Head.

RESTRICTIONS: Entry from 2 hours before HW until HW only.

MAX. SIZE: Governed by depth on sill of 28 ft. at springs and 24 ft. at neaps: width of dock gates, 65 ft. and length of turning area 480 ft.

HEALTH: Master of ship arriving from foreign port must deliver Maritime Declaration of Health in order to obtain Pratique. An oral Declaration will suffice for ships trading solely between Republic of Ireland and Belgium, Holland and European France. Pratique will be granted or withheld depending on answers given to questions put in Health Declaration.

In event of a suspected disease or fever on board, vessel is detained pending arrival of Medical Officers of Health. No unauthorised person is allowed to leave ship without authority of Chief Medical Officer.

Pratique is automatic when vessel arrives from ports in Great Britain, Isle of Man, Northern Ireland and Channel Islands or another port within Eire.

RADIO: ETA cables to Agents, etc., through Valentia Radio if approaching from South or Malin Head if from North. Valentia has telephone link service. Port VHF on Channel 16.

TUGS: No tugs available.

CARGO HANDLING FACILITIES: One 30-ton cantilever crane in operation at Dun Aengus South Quay. Grain, ore, coal, bulk fertilisers, etc. are all handled by grabs. Ore is loaded by special conveyors (200 t.p.h.).

STEVEDORES: Agents arrange after receipt of ETA.

MEDICAL: No special port medical requirements. Ships medical requirements should be included in ETA signal.

TANKERS: No special requirements. 1 berth.

DENSITY: 1012 (average).

FRESH WATER: Available by hose.

FUEL: All grades available.

GANGWAY/DECK WATCHMEN: (Open quays) watchmen recommended.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CUSTOMS ALLOWANCE: Wine, Spirits and Tobacco: members of a crew who remain out on a vessel during her stay in port are allowed to retain in their own possession, under certain conditions, the following quantities of the undermentioned goods:

	Tobacco in any form (to cover 8 days)	*Spirits in any form* (to cover 4 days)	*Wine* (to cover 4 days)
The Master	8 oz.		
Officers (i.e., mates, engineers, wireless operators, ship's surgeons, pursers, chief stewards or serangs)	6 oz.	1 pint	1 gallon
Other Crew members	4 oz.	1 pint	

IDENTIFICATION CARDS: Not needed.

CONSULS: T. McDonogh & Sons Ltd., Merchant's Road, Consuls for France and Belgium only. No others in Galway.

REPAIRS: Deck and engine repairs carried out afloat.

DRY DOCKS: No dry dock.

REPATRIATION: Crew changes and repatriation can be effected.

AIRPORT: Dublin (140 miles) and Shannon (55 miles). Airports served by regular flights.

TIME: GMT plus 1 hour. Reverting to GMT from October to March.

HOLIDAYS: Christmas Day; St. Stephen's Day (26th December); St. Patrick's Day (17 March); Easter Monday; Whit Monday; First Monday in August.

POLICE/AMBULANCE/FIRE: Police 2121; Ambulance 4141; Fire 999.
TELEPHONES: No arrangements exist for placing telephones on board.
SERVICES: Compass adjusters available in Dublin. 24 hours notice to Agent.
SHORE LEAVE: Allowed.
DELAYS: Apart from tidal, none.
AUTHORITY: Galway Harbour Commissioners.

KILLYBEGS: 54.38 N. 08.26 W.

DOCUMENTS: See "Dublin".
PILOTAGE: No permanent Pilot but one can be acquired on request.
ANCHORAGE: Very safe anchorage.
RADIO: Malin Head Station.
BERTHING: Large fishing fleet has to be accommodated.
MEDICAL: Necessary to send advance warning re illness or injury to a Crew member.
FRESH WATER: Available.
FUEL: Fuel oil available.
DEVELOPMENTS: Major harbour scheme has commenced – additional wharves, and piers.
IDENTIFICATION CARDS: Not needed.
SHORE LEAVE: Crew members allowed ashore.
AUTHORITY: Department of Fisheries and Forestry, Dublin.

LIMERICK: 52.40 N. 08.38 W. (See Plan Book)

DOCUMENTS:

2 Crew Lists.
2 Passenger Lists.
1 Custom's Manifest (Tobacco List).
Health Declaration.
Ship's Register (Tonnage Certificate).
Safety Equipment Certificate.
Safety Radio Certificate.
Load Line Certificate.
Receipt for last previous Trinity House Light Dues payment (if any).
Derat Certificate.

PILOTAGE: Compulsory from Scattery Island (52.35 N., 09.31 W.) to Limerick. Pilot may be taken off Kilcredane Head about 9 miles further West as an optional extra (usually by vessels over 5,000 d.w.t.). ETA for Pilots passed in advance by Agents. Masters may call Pilots (Scattery Pilot Station – Channel 16 VHF) or by normal International Code sight or sound signals. ETA to be sent 24 hours in advance and amended as necessary. Pilots watch only when vessels are expected inwards or outwards.
ANCHORAGE: Vessels normally wait tide to Limerick at Scattery Roads; Beighcastle Anchorage depth over 60 ft. (52.40 N. 08.57 W.) about 18 miles downstream off Limerick is nearest deep-water anchorage; now disused as lightening place for bulk grain cargoes. Larger vessels (over 10,000 d.w.t.) anchor 1.5 to 2.0 miles West of Scattery Lighthouse.
RESTRICTIONS: Entrance to Limerick Dock is limited to 2 hours preceding HW; for vessels over 3,000 d.w.t. (laden) daylight HW only.
MAX. SIZE: Dependent on tide. Up to 21 ft. draft on spring tides (neap tides about 16 ft.) Vessels of 500 × 65 ft. beam have berthed Limerick Dock on suitable draft.
HEALTH: If no infectious diseases on board, pratique granted by Customs Preventive Officer on arrival on presentation of Health Declaration of Master. Landing of dogs and cats from outside British Isles strictly forbidden.
RADIO: Irish Stations; Valentia Radio (link-calls available) or Malin Head Radio, or any U.K. Radio Station. Agents have special arrangements with Valentia Radio and Malin Head Radio, cables passed by direct telex to Agent's office.
VHF: Masters can call Scattery Pilot Station on Channel 16, or Limerick Harbour Radio – same, working on Channels 12 and 13.
TUGS: One 400 h.p. tug available. The Harbour Dredger is also fitted with a towhook and used as tug if necessary.
BERTHING: In Limerick Dock there are 10 berths of which only 1 (Shell berth) is reserved exclusively for tankers. Drafts on all berths approx. tidal gauge plus 2 ft. Extensive berthage on tidal quays now used by fertilizer vessels up to about 1,000 d.w.t. lying safe ground on mud berths.
TANKERS: Dernish Oil Jetty situated approximately 1 mile South of Shannon Airport. Jetty head 150 ft. long. Distance between head and stern buoys 430 ft. Depth alongside LW 26 ft. Jetty designed for vessels of up to 12,000 d.w.t. Aviation fuel pumped direct to airport.
STEVEDORES: Sole stevedores Limerick Cargo Handling Ltd. (as a result of rationalisation scheme). ETA per Agent before 1600 hrs. each day Monday to Thursday for labour next day. Master to state number of gangs/workable hatches. Crew open and close hatches. Normal work 0800/1700 hrs. but overtime can be worked 24 hours per day, Saturday and Sunday included. Requisition for labour for weekend work and 0800 hrs. Mondays by 1600 hrs. Friday.

Discharge rates: Bulk cargoes 1,000 tons per day.
D.B.B. 60 standards per day.
Packaged timber 150 stand. per gang day.
Bagged cargoes (palletised in hold) 400 tons per gang day.
Generals 130 tons per gang day.
All cargoes by crane discharge.

Grain consigned to Ranks is discharged directly to mill by floating grain elevator "Garryowen" in Wet Dock. Rate 150 t.p.h.
CONTAINER HANDLING FACILITIES: A 32-ton Gantry Container Crane at Limerick Docks.
MEDICAL: All medical facilities available short notice.
DENSITY: 1000 in Limerick Dock.
FRESH WATER: Available at all berths ex hydrant. Average rate 7.5 t.p.h.
FUEL: All grades available in reasonable quantities per road truck on 24 hours notice. (Non-bunker port prices).
WATCHMEN: Watchmen from crew, or if none available shore watchmen available.
HATCHES: Opening and closing of hatches, setting up derricks, shifting of hatches, beams, patent hatches, etc., all to be done by ship's crew with no assistance from shore gangs.
CONSULS: Belgium, Denmark, Finland, France, Germany (Fed. Rep.), Holland, Spain, Sweden.
CUSTOMS ALLOWANCES: (Tobacco per 8 days). Master 200 cigarettes; Officers 150 cigarettes; Crew 100 cigarettes. Wine/Spirits: quarter pint per man per day.
REPAIRS: Limited facilities. Dry dock available for vessels up to 40 ft. beam and not exceeding 15 ft. draft.
REPATRIATION: No difficulties. Shannon International Airport 15 miles. Daily flights world-wide destinations.
TIME: As U.K. GMT or GMT plus 1 hour (Summer Time).
HOLIDAYS: (For dock working), New Year's Day (1st January); St. Patrick's Day (17th March); Easter Monday; First Monday in June; First Monday in August; half-day 24th December, 25th December, 26th December (Christmas Day and St. Stephen's Day).
POLICE/AMBULANCE/FIRE: Dial 999 for all emergency services.
SHORE LEAVE: No restrictions.
AUTHORITY: Limerick Harbour Commissioners.
AGENT: Mullock & Sons Ltd., Ship's Agents and Chartering Brokers, Security House, 15 Lower Mallow Street, Limerick. Tel.: 061-45044; 061-45155. Cables: "Mullock Limerick" Telex: 6911.

NEW ROSS: 52.23 N. 06.56 W.

PORT LIMITS: Drumdowney Point to Kilmore Quay adjacent Barrow Bridge 52° 23′ N. 06° 56′ W. The vessel is considered to be an arrived ship at the time of first high water after arrival off Barrow Bridge.
DOCUMENTS:

2 Cargo Manifests.
1 Bill of Lading.
1 Crew List.
1 Ship's Store List.
1 Passenger List.
1 Clearance.
Register.
Light Dues Certificate.
Deratisation Certificate.

PILOTAGE: For estuary Pilot (See "Waterford").
New Ross Pilots Tel. 051-82206. Pilotage messages received and transmitted by Barrow Bridge VHF Channels 16 and 11. Early ETA advisable. Pilotage compulsory.
ANCHORAGE: To Pilot's advice.
RESTRICTIONS: Max. draft 19 ft. at neap tides, 22 ft. at spring tides, max. length 420 ft., max. beam 60 ft.
Navigation of the River Barrow for max. size vessels usually restricted to 2 hours before, to 2 hours after high water.
HEALTH: Declaration on arrival, international signals for pratique.
RADIO: Malin Head, Land's End or Ilfracombe Radio Station.
TUGS: Available on request.
BERTHING: 1,400 ft. new jetty, depth 25 ft. below LW Spring tide. Roll-on/Roll-off facilities available.
STEVEDORES: 24 hours notice required.

Bulk discharge rate:	200 t.p.h.
Bag rate	100 t.p.h.
Liquid discharge	300 t.p.h.

FRESH WATER: Available at all berths.
FUEL: Obtainable by road tankers.
CONTAINER FACILITIES: 45-ton crane. Five-acre storage space.
MEDICAL: Services available locally.
DENSITY: 1012 New Ross.
WATCHMAN: Available if required.
HATCHES: Ship's crew normally open and close hatches; shore-crane may assist.
CUSTOMS: Members of a crew who remain on a vessel during stay in port, are allowed to retain under certain conditions the following quantities of the undermentioned goods:
Tobacco (in any form): Master 8 oz., cigarettes 200; Officers: tobacco 6 oz., cigarettes 150; Crew members: tobacco 4 oz., cigarettes 100.
Spirits (in any form) to cover 4 days 1 pint (1 bottle each). Wine of any strength allowed in place of spirits at rate of 1 pint wine to half pint spirits. In addition, an allowance of 1 quart of beer or 1 pint of

wine 30 proof per man per day. Members of crew whatever rank finally leaving vessel allowed to take ashore free of duty for their own personal consumption, following quantities of undermentioned goods, when they form whole of their unconsumed stores:

(a) If from ports in Great Britain, Northern Ireland, or the Isle of Man, or continental ports between the Elbe and Brest (except vessels crossing at regular and frequent intervals): tobacco in any form 4 oz.; spirits (ordinary drinkable) quarter pint; spirits (cordials or perfumed) quarter pint.

(b) If from any other port, double the quantities specified at *(a)*.

(c) Irrespective of the port from which arriving.

IDENTIFICATION CARDS: Not required.
REPAIRS: Floating ship repairs only.
REPATRIATION: Facilities exist.
AIRPORTS: Dublin 95 miles; Cork 90 miles.
TIME: GMT plus 1 hour. Reverting to GMT between October and March.
HOLIDAYS: St. Patrick's Day (17th March); Easter Monday; Whit Monday (1st Monday in August); 25th and 26th December.
POLICE/AMBULANCE/FIRE: Telephone 999.
SHORE LEAVE: Allowed.
AUTHORITY: New Ross Harbour Commissioners.

RATHMULLEN: 55.05 N. 07.31 W.

DOCUMENTS: Papers supplied by Agent in Rathmullen or by Customs.
PILOTAGE: Pilot obtained through Agent in Rathmullen 24 hours notice of ETA required.
ANCHORAGE: Anywhere in Lough.
MAX. SIZE: Any size of vessel can anchor. Max. draft for berthing, 30 ft.
HEALTH: See "Dublin".
RADIO: Malin Head.
TUGS: None required.
BERTHING: No specific requirements.
STEVEDORES: 24 hours ETA required.
MEDICAL: Assistance can be arranged at short notice. Hospital facilities are available.
FRESH WATER: Available on berth.
FUEL: Different grades available at short notice.
GANGWAY/DECK WATCHMEN: Recommended
OPENING/CLOSING HATCHES: Normally carried out by crew.
CUSTOMS ALLOWANCE: Tobacco, Wine: See "Dublin".
IDENTIFICATION CARDS: Not needed.
CONSULS: None at port.
REPAIRS: Only small repair jobs carried out.
REPATRIATION: Facilities exist.
AIRPORT: 80 miles away, serviced by regular flights.
TIME: GMT plus 1 hour. Reverting to GMT in Winter months.
HOLIDAYS: Work can be arranged on all church and bank holidays.
POLICE/AMBULANCE/FIRE: Police, Rathmullen 2; Fire, Letterkenny 112; Ambulance, Letterkenny 230.
TELEPHONES: No arrangement for placing telephones aboard.
SERVICES: No special services.
AUTHORITY: Harbour Master.

ROSSLARE: 52.16 N. 06.20 W.

PORT LIMITS: The limit lines start from a point on shore 4,000 ft. South-east of viaduct and extend due North for a distance of 6,000 ft. and thence due West for a distance of 7,000 ft., thence due South for a distance of 3,430 ft., terminating on shore at a point 3,650 ft. West of existing viaduct.
DOCUMENTS:
Customs Documents.
Ships Manifests.
Crew List.
PILOTAGE: Not compulsory.
ANCHORAGES:

Prohibited Anchorage:	304° – 4.5	cables from Lighthouse
,, Thence	214° – 2	,, ,, ,,
,,	124° – 4.5	,, ,, ,,
,,	034° – 2	,, ,, ,,

No anchorage inside breakwater. Sheltered from Southerly round to North Westerly winds.

Dangers: Shoals with depths of less than 18 ft. extend about 4 cables E.S.E. from head of breakwater. Shoal 18 ft., Southern end of which lies about 0.75 cables Northward of end of breakwater. Southern end of an extensive stony flat, having depths of 13 ft. to 18 ft. lies about 3.5 cables further to N.W. Between these shoals lies several outcrops of 18 ft.-19 ft.

MAX. SIZE: Max. draft 16 ft. 6 in. No. 3 berth – 440 ft. length, 6 ft. 6 in. draft. No. 4 berth – 380 ft. length, 16 ft. 6 in. draft. Also see "Berthing".
HEALTH: If no infectious diseases on board, pratique given by customs on arrival. If from a port within E.E.C. this may be given verbally, otherwise required in writing.
RADIO: Ilfracombe or Lands End radio station.
VHF: Call sign "Rosslare Harbour radio" Channel 16. Channel 14 for further communication when within radio range.
TUGS: None available.
BERTHING: Berth No. 3 reserved for British Rail and Irish Shipping Ferries. Berth No. 4 must be clear for all departures from Berth No. 3. Port caters for Roll-on/Roll-off traffic only, via stern loading terminal and ramp on West side of pier.
STEVEDORES: Ordered by Agents. ETA necessary.
MEDICAL: Advance notice required at least one hour. Hospital facilities 12 miles away.
DENSITY: Average 1025.
FRESH WATER: Laid on, delivery by hose. Cost £1.00 per 1,000 gals, or part thereof.
FUEL: No facilities.
GANGWAY/DECK WATCHMEN: Not compulsory.
OPENING/CLOSING HATCHES: Crew assisted by stevedores.
CUSTOMS ALLOWANCE: Tobacco: 50 grammes per day or (40 cigarettes or 10 cigars). Spirits, 0.25 litres per day. Wine, 0.50 litres per day.
CONSULS: None.
REPAIRS: No repair plant. Minor repairs possible by firms at Wexford (12 miles), Waterford (52 miles), Arklow (50 miles).
REPATRIATION: No facilities.
AIRPORTS: Dublin 110 miles. Cork 134 miles.
TIME: GMT plus 1 hour. Reverting to GMT in Winter months.
HOLIDAYS: New Year's Day; St. Patrick's Day (17th March); Easter Monday; June Bank Holiday; August Monday; Christmas Day (December 25, and 26). No work Christmas Days – December 25, and 26.
POLICE/AMBULANCE/FIRE: Police: Rosslare Harbour 33204; Ambulance: County Hospital, Wexford 22233; Fire: Fire Brigade, Wexford 22618.
TELEPHONES: No facilities for placing telephones on board.
SHORE LEAVE: Crew allowed ashore.
IDENTIFICATION CARDS: Seaman's Book sufficient.
DEVELOPMENTS: Proposed additional Ro/Ro berth.
GENERAL: Leading lights for berth are fixed red, visible over an arc of 90° from 079° to 169° surmounting yellow diamond shaped daymarks.

Lighthouse on pier end, height 50 ft. flashing W.R.G. every 5 seconds.

Vessels coming astern to berth should make due allowance for N.E. and S.W. cross currents off pier end.

AUTHORITY: Coras Iompair Eireann.

SHANNON ESTUARY: (See Plan Book)

(a) Foynes Harbour: 52.36 N. 09.06 W.
(b) Foynes Island: 52.37 N. 09.07 W.
(c) Tarbert Island Oil Terminal: 52.35 N. 09.21 W.

(a) FOYNES HARBOUR

DOCUMENTS: See "Limerick".
PILOTAGE: Compulsory from Scattery Island to Foynes Buoys. Pilot may be taken off Kilcredane Head about 9 miles farther West as an optional extra (usually by vessels over 5,000 d.w.t. ETA for Pilots passed in advance by Agent. Masters may call Pilots (Scattery Pilot Station, Channel 16 VHF) or by normal International Code sight or sound signals. Foynes Harbour Pilot boards at Foynes Buoys. Call Foynes Harbour Radio VHF Channel 16.
ANCHORAGE: Vessels waiting to enter Foynes normally anchor Foynes Roads (West of Foynes Buoys).
RESTRICTIONS: No restrictions by day or night on vessels under 4,000 d.w.t. Vessels over 4,000 tons, up to 500 ft. BP length, without limit on beam, and up to 30 ft. draft in daylight only on suitable tidal conditions. Large vessels in ballast normally enter on early flood tide and swing with tidal stream berthing port side to quays ready for departure after loading. Similar vessels loaded enter on last of flood. Alternatively berth starboard side to quay on early ebb and swing after unloading with reduced draft on departure.
MAX. SIZE: Vessels up to 500 ft. BP length and 30 ft. draft with no restriction on beam. Ore cargoes of up to 16,000 tons have been loaded and tankers up to 20,000 tons have discharged.
HEALTH: See "Limerick".
RADIO: See "Limerick".
VHF: As for Limerick except for "Limerick Harbour Radio" substitute "Foynes Harbour Radio".
TUG: None available.
BERTHING:

West Pier: 34 ft. LWOST neap tides. 350 ft. quay with mooring buoys ahead and astern. For tankers, crude ore (loading by conveyor system) and other cargoes. See "Stevedores".

East Pier: 32 ft. LWOST neap tides – 460 ft. quay with mooring buoys ahead and astern. Metal concentrates bulk (loading by conveyor system) and other cargoes. See "Stevedores".

Inner Berth, East Jetty: 20 ft. LWOST. Length 400 ft.

Three other berths where vessels up to 2,000 d.w.t. lie safe aground on soft mud during low water.

STEVEDORES: ETA per Agent before 1600 hrs. Monday/Thursday for labour next day 0800 hrs., before 1600 hrs. Friday for labour Saturday or 0800 hrs. Monday. For cargoes other than bulk ore or concentrates in bulk Masters should state number of gangs/workable hatches.

Crude Ore: West Pier Conveyor: 500 t.p.h. loaded normally on continuous basis, day and night, commencing on berthing (16,000 tons in 28 running hours).

Concentrates in bulk. East Pier Conveyor: 250/300 t.p.h. normally loading 12 hours per 24 hours (running hours). Other import/export cargoes by ship's gear or shore mobile cranes (max. 3 units available).

Packaged D.B.B.: 120 stds. per gang day (pre-slung).

Packaged D.B.B.: 70 stds. per gang day (shore slings).

Bulk Fertilizers: 750 tons per day (mobile grab crane).

Bag Fertilizers 400 tons per gang day (shore mobile cranes).

Bagged Barytes, bagged cement and other bagged commodity: 400 tons per gang day (ship's gear/mobile crane).

Storage facilities: 15 acres of open landing ground and 25,000 sq. ft. of covered storage.

Weighbridge: An electronic weighbridge with a capacity of 50 tonnes, and length of bridge is 50ft.

MEDICAL: Emergency facilities available at short notice locally. Full general hospital facilities at Limerick, 25 miles distant.

DENSITY: Variable on season and tidal conditions between 1008/1020.

FRESH WATER: Available at all berths. Quantities over 35 tons must be notified 24 hours in advance. 12p per ton.

FUEL: Available East Pier from adjacent installation.

WATCHMEN: Normally crew watchmen.

HATCHES: See "Limerick".

CUSTOMS ALLOWANCE: See "Limerick".

REPAIRS: Limerick facilities – no dry dock.

REPATRIATION: No difficulties – Shannon Airport 40 miles.

TIM : See "Limerick".

HOLIDAYS: See "Limerick".

POLICE/AMBULANCE/FIRE: Call local telephone operator and request service required.

SHORE LEAVE: No restrictions.

AUTHORITY: Foynes Harbour Trustees.

AGENT: Mullock & Sons, Ltd. Tel: 061-92115. Telex No. 6986.

(b) FOYNES ISLAND

LOCATION: Cement Limited Oil Jetty is located on N.W. side of island. Buoyed moorings for tankers up to 60,000 tons (length 950 ft.). Vessels lie alongside breasting dolphins off pipe trestle in 50 ft. min. LWOST.

DOCUMENTS: See "Limerick".

PILOTAGE: Compulsory from Scattery Island to Foynes Island (otherwise as Limerick).

ANCHORAGE: Vessels normally wait at Scattery Roads, West of Scattery or at anchor N.E. of Foynes Island Jetty waiting daylight early flood tide for berthing.

RESTRICTIONS: None for vessels up to 60,000 d.w.t. subject daylight movements berthing early flood tide and departures during flood tide.

Mooring lines required: at least 4×120 fathoms and 6×90 fathoms polypropylene or similar.

MAX. SIZE: A min. depth alongside 50 ft.

RADIO:
VHF: See "Limerick".
HEALTH:
TUGS:

MEDICAL: No facilities on island. See "Foynes" and "Limerick".

TANKERS: Flexible hoses 2×8 in. passed by derrick from pipe trestle to ship. Connections – PCD 11.75 in., 8 holes.

DENSITY: 1025 except in very exceptional conditions.

FRESH WATER: None available.

FUEL: None available.

CUSTOMS: See "Limerick".

REPAIRS: None except via Foynes or Limerick.

REPATRIATION: Via Foynes.

TIME: See "Limerick".

HOLIDAYS: As Limerick. Vessels normally discharge without regard to holidays.

TELEPHONES: Shore 'phone placed on board for ship's use with cargo hoses. Tel.: Foynes 55.

SHORE LEAVE: Restricted to daylight hours as launch service only then available. No access to mainland except by launch.

AUTHORITY: Limerick Harbour Commissioners.

AGENT: See "Limerick".

(c) TARBERT ISLAND OIL TERMINAL

LOCATION: Electricity Supply Board power station and Jetty located on N.W. shore of Tarbert Island (with road access from the mainland) 52.35 N. 09.21 W. Berth 48 ft. draft LWOST overall length including outer mooring dolphins 1,050 ft. with berthing face of 300 ft.

DOCUMENTS: See "Limerick".

PILOTAGE: Compulsory from Scattery Island to Tarbert (otherwise as Limerick).

ANCHORAGE: Vessels normally wait at Scattery Roads or West of Scattery for daylight flood tide for berthing.

RESTRICTIONS: None for vessels up to 70,000-80,000 d.w.t. on suitable draft, berthing daylight flood tide, departure on flood tide in daylight or darkness (subject good weather).

MAX. SIZE: The berth has 48 ft. alongside at low water.

RADIO:
VHF: See "Limerick".
HEALTH:

TUGS: Not required.

MEDICAL: No facilities. Nearest doctor at Glin, Co. Limerick (6 miles), See "Limerick".

TANKERS: 2, Marine Arms – 10 in. PCD 14.15/16 in. Outer diam. 16 in., inner diam. 11 in. Holes, 12 of 0.75 in. diam.

DENSITY: 1025, except in very exceptional conditions.

FRESH WATER: Limited supply on special request.

FUEL: None available. Jetty head approached from shore by footway (4.5 ft. wide×650 ft. long), therefore no direct access to berth from shore for road transport.

WATCHMEN: Watchmen from crew.

CUSTOMS ALLOWANCES: See "Limerick".

REPAIRS: None locally. Nearest Limerick 40 miles distant or Foynes, 7 miles distant. Difficulty of access should be noted.

REPATRIATION: Via Limerick.

TIME: See "Limerick".

SHORE LEAVE: No restrictions.

TELEPHONES: At jetty head. Tel.: Extension to Power Station telephone.

AUTHORITY: Limerick Harbour Commissioners.

AGENT: See "Limerick".

DEVELOPMENTS:

Aughimish Isle: (2 miles East of Foynes Island). Work has begun on a large alumina extractor plant by ALCAN. Ships up to 70,000 tons d.w.t. will use a jetty to be built North of island. (On stream 1982).

Money Point: A power station (coal burning) to take vessels up to 150,000 tons is to be constructed by the E.S.B. at Money Point opposite Tarbert (On stream 1985).

SLIGO: 54.16 N. 08.28 W.

DOCUMENTS:

Crew List.
Aliens List for other than Irish and British Ships.
Customs Clearance from previous port.
Health Declaration.
Manifest.
Surveys 109 Deck Cargo and 107 for Grain.

PILOTAGE: Tel. 071-73157 for Outside Pilot, Sligo 3036 for Inside Pilot who can be contacted on VHF Channels 12 and 16. Pilot boat a black yawl. Pilot boards off Raghley Head.

ANCHORAGE: East of Wheat Rock Buoy depth 40 ft.

RESTRICTIONS: Small vessels from half tide to 2 hours after high tide, large vessels near high tide and daylight.

MAX. SIZE: 275 ft. long, breadth not restricted, draft 16 ft. Spring tides, 13 ft. neap tides.

HEALTH: Home trade areas, verbal declaration, all others written declaration. Vessels from Great Britain automatic procedure. Suspected diseases inform Customs Officer or County Medical Officer of Health. Appropriate signals day and night.

RADIO: Malin Head, Wick or Port Patrick Radio.

TUGS: None.

STEVEDORES: 24 hours notice required. Coal 500 tons per day for crane. Fertilisers in bags 2 gangs, 500 tons per 8 hour day. Timber 40 stds. per hatch per day.

MEDICAL: No facilities.

DENSITY: 1004, high tide.

FRESH WATER: Available by hose, at 12.5p per ton.

FUEL: All grades available, 24 hours notice required.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: By crew.

CERTIFICATES:

Register.
Articles.
Light Dues Certificate.
Deratisation Certificate.

CUSTOMS ALLOWANCE: Members of crew who remain on a vessel during stay in port allowed to retain, under certain conditions, the following quantities of the undermentioned goods:

Tobacco in any form (to cover 8 days): Master 8 oz. 200; Officers 6 oz. 150; crew members 4 oz. 100.

Spirits in any form (to cover 4 days) 1 pint (1 bottle each). Wine of any strength, allowed in place of spirits at rate of one pint wine to 0.5 pt. spirits. In addition, an allowance of 1 quart of beer or 1 pint of wine per man per day.

Members of a crew of whatever rank finally leaving vessel allowed take ashore, free of duty, for own personal consumption, following quantities of undermentioned goods, when they form whole of their unconsumed stores:

(a) If from ports in Great Britain, Northern Ireland or the Isle of Man, or continental ports between the Elbe and Brest (except vessels crossing at regular and frequent intervals): Tobacco in any form 4 oz. Spirits (ordinary drinkable) 0.25 pint. Spirits (Cordials or perfumed) 0.25 pint.

(b) If from any other port, double the quantities specified at *(a)*.

(c) Irrespective of the port from which arriving.

IDENTIFICATION CARDS: Required.

CONSULS: Netherlands Vice-Consul, Sligo 2622.

REPAIRS: Welding and light repairs.

REPATRIATION: Facilities exist.

AIRPORT: Dublin, 135 miles away.

TIME: GMT plus 1 hour. Reverting to GMT between October and March.

HOLIDAYS: St. Patrick's Day (17th March); Easter Monday; Whit Monday (1st Monday in August); 25th and 26th December. Not usual to work on any of these days.

POLICE/AMBULANCE/FIRE: 999.
TELEPHONES: None available for placing on board.
GENERAL: In N.W. gales, shelter available at Killybegs, Donegal Bay.
SHORE LEAVE: Allowed.
AUTHORITY: Sligo Harbour Commissioners.

WATERFORD: 52.15 N. 07.07 W. (See Plan Book)

DOCUMENTS:
3 Manifests.
1 set Bills of Lading.
1 Crew List (aliens).
1 Ship Stores List.
1 Passenger List.
PILOTAGE: Compulsory. Tel. Address "Dunmore Pilots" 24 hours ETA if possible. Tel. Dunmore East 83119. VHF call sign "Dunmore Pilots". Channel 16 calling up, Channel 14 working.

Pilot Boat black hull with words "Pilots" in white on sides. Location off Dunmore East Pier.

In event bad weather a vessel is directed to Passage East by VHF where a Pilot will board in smooth water.
ANCHORAGE: Good anchorage on Eastern Shore at entrance to Harbour in Easterly winds. 30 ft. LWOST.
RESTRICTIONS: Draft restricted by 2 bars. At Duncannon, a sand bar with a low water depth of 14.5 ft. The other at Cheekpoint with low water depth 11.5 ft.

Vessels of deeper draft await tide at Dunmore East Anchorage.
MAX. SIZE: 450 ft. LOA normally; 475 ft. LOA by arrangement. Draft 22 ft. neap tides; 24 ft. spring tides. 5,000/7,000 d.w.t. or 10,000 d.w.t. partly laden.
HEALTH: Vessels fly "Q" flag, pratique given by Customs. Infectious diseases to be notified to Agent before arrival.
RADIO: Messages through Land's End or Valentia Radio Stations.
VHF: Harbour Commissioners have VHF station at Dunmore East, Channel 14 for calling, Channel 16 working.

A watch is kept at the station during the following hours:
0000 to 0100 1200 to 1300
0400 to 0500 1600 to 1700
0800 to 0900 2000 to 2100
TUGS: No tugs available.
BERTHING:
North Side

Jetties	*Length (m.)*	*(ft.)*	*Approx. Depth LWOST (m.)*	*(ft.)*	*Cargo Handling facilities*	*Remarks*
National Board & Paper Mills	45.7	150	6.09	20	Bulk oil discharge	Private
Nos. 1, 2 and 3 Berths	300	984	6.91	22′ 8″	2 at 6-ton 4 at 3-ton elec. portal cranes	Public W.H.C.
No. 1	106.7	350				
No. 2	71.3	234				
No. 3	121.9	400				
Hall's	79.2	260	7.62	25	Grain elevators. Storage capacity of 25,000 tons	Private 200 t.p.h.
North Side (New Wharves):						
Frank Cassin Wharf (Container Wharf)	222.5	730	6.85	22′ 6″	2 at 35-ton gantry container cranes	W.H.C. Private backed by Container Compound
New Container Berth	100.5	330	7.82	25′ 8″	1 at 35-ton derrick crane	W.H.C. Public backed by Container Compound
No. 4 Berth	146.3	480	7.82	25′ 8″	*Proposed:* 2 at 7.5 ton grabbing cranes	W.H.C. General
South Side:						
Forde Wharf	91.4	300	6.91	22′ 8″	1 at 20-ton 1 at 6-ton elec. portal cranes	W.H.C. Public
Clyde	243.3	800	5.18	17	1 at 25-ton electric derrick	W.H.C. Public backed by Container Compound
Adelphi Quay	85.3	280	5.48	18	1 at 24-ton electric derrick	W.H.C. Public backed by Container Compound
Graves & Co.	82.3	270	5.48	18		Private timber wharf

Also various Pontoons, etc., for Livestock loading.
There are various other cranes – 10 ton mobiles, forklifts, travel-lifts up to 28 tons, etc., available.
BRIDGES: Times of passing through Redmond and Suir Bridge for National Board and Paper Mills Berth and for vessels proceeding upriver to Fiddown, to be arranged by Ship's Agent.

STEVEDORES: Agent arranges discharge upon receipt of ETA.
Grain discharge: 1,400 tons per day (180 t.p.h.).
Coal discharge: 400 tons per gang per day.
Sugar discharge: 800 tons per gang per shift of 8 hours.
Fertiliser discharge: 400 tons per gang per day.
Timber discharge: 30 standards per gang per day.
MEDICAL: Hospital and ambulance available. Arrangements made by ship's Agent.
TANKERS: Great Island Jetty, used by Electricity Supply Board. Max. design size 20,000 d.w.t. However approach channel of river and Duncannon Bar not yet dredged for this size.
DENSITY: 1008 at LWOST.
FRESH WATER: Available by hose 15 t.p.h.
FUEL: Supplies available by road tanker.
DEVELOPMENTS: Consideration being given to deepening the approach channel. The extension of the deep-water berths will have 25 ft. 8 in. alongside at LWST.
GANGWAY/DECK WATCHMEN: Day watchmen not necessary. Night watchmen at Master's wish.
OPENING/CLOSING HATCHES: Done by crew.
CERTIFICATES:
Register.
Freeboard Certificate.
Tonnage Certificate.
Deratisation Certificate.
Radio Certificate.
Life-saving Appliance Certificate, etc.
CUSTOMS ALLOWANCE: Tobacco: Master 8 oz. Officers 6 oz. Crew 4 oz. Wine and/or Spirit: 1 pint spirits.
CARGO GEAR: Not beyond ordinary Factory Act requirements.
IDENTIFICATION CARDS: Not needed.
CONSULS: Belgian/French – F. J. Cassin c/o M. Farrell & Son, Tel. 74978.

Danish/Finnish/Netherlands – Mr. M. Lardiner, c/o Kenny, Stephenson & Chapman, Newtown, Waterford, Tel. 75855.

Spanish – Mr. I. Farrell, c/o Nolan, Farrell & Goff, Newtown, Waterford, Tel. 32934.
REPAIRS: Minor repairs.
DRY DOCKS: No dry docks available.
REPATRIATION: Facilities exist.
AIRPORT: Dublin 100 miles, Cork 75 miles, Shannon 75 miles. Served by regular airlines.
TIME: GMT plus 1 hour. Reverting to GMT in Winter months.
HOLIDAYS: St. Patrick's Day; Easter Monday; August Bank Holiday; Christmas Day; Boxing Day.
POLICE/AMBULANCE/FIRE: Police 74888; Ambulance 3321; Brigade 75555.
TELEPHONES: None available for placing on board.
SHORE LEAVE: Allowed.
AUTHORITY: Waterford Harbour Commissioners.

NOTES

Please also advise Shipping Guides Ltd.

Israel

GENERAL: All vessels bound for the ports of Haifa, Ashdod and Ashkelon have to send a position report when they arrive at a distance of 50 miles from the Israeli coast. Such position reports shall be sent to "SVC IMOT" and shall contain the following information: (a) Date and time; (b) Ship's name; (c) Position; (d) Course; (e) Speed; (f) Destination.

ASHDOD (Inc. Ashkelon): 31.49 N. 34.39 E. (See Plan Book)

DOCUMENTS:

3 Crew Lists, and Crew Passports or Seamen's Books.

1 Provisions List.

1 List of Articles in possession each Crew member – cameras, binoculars, radios, cigarettes, tobacco, etc.

Master to declare firearms and rounds of ammunition.

4 Passenger Lists.

Stowage Plan and Manifest to be mailed in advance, preferable Master to cable 72 and 48 hours before arrival holds workable and gangs required also draft forward and aft on arrival.

PILOTAGE: ETA through Haifa Radio 4XO addressed to Agent at least 12 hours before arrival. Pilot station and boat equipped VHF Channel 14 and 16 contact station for instructions. Pilot boards about 0.5 mile off port entrance between W. to N.W. from breakwater head (green light).

In bad weather, when boarding impossible, vessel is guided into harbour by VHF or tugboat waiting at entrance, at Master's consent.

Pilot ladder as per Safety of Life at Sea. Vessel should head about 4 points into weather. Recommended 2 life-lines running along ladder, 1 each side, ropes 2.5–3 in. circ.

ANCHORAGE: All area open sea, no recommended safe anchorage, but vessel should avoid anchorage near fairway and too close to oil installation buoys.

Masters are advised to keep the decks well lit in view of the strong lights ashore which may cause the anchor lights to be seen with difficulty by approaching vessels.

Vessels moored to the breakwaters shall have their anchor lights burning.

RESTRICTIONS: Pilotage available 24 hours. Enter according arrival time or berths available. Vessels at anchorage awaiting berth keep watch Channels 14 and 16.

MAX. SIZE: Draft limitations at Bulk Pier: Summer, 11 m. Winter, 10.5 m. Draft limitations other piers: 9.8 m. No. limits length or breadth. Also see "Tankers".

HEALTH: Free pratique is requested via Haifa, address, "Quarantine Haifa".

RADIO: Haifa Radio 4XO, also see "Haifa".

TUGS: 1 of 1,500 h.p., 2 of 1,000 h.p. Each charge included in pilotage charge for normal berthing attendance. Tugs await at port entrance and act on Pilot's instructions. Vessel's lines are requested.

BERTHING: Container terminal in operation.

TANKERS: Terminal situated at Ashkelon where tankers load crude oil by under-water pipe-lines. Size of vessel is unlimited due to the depth of water. The loading rate is about 30,000 tons in 12 hours. All services such as supply of bunkers, provisions, water, crew changes, must be carried out at Ashdod roadstead where health and immigration officials board. Vessels not requiring any services at Ashdod may call directly at Ashkelon, only paying light dues and anchorage dues.

FRESH WATER: Fresh water supplied by taps at 220 t.p.h. or by barge. Minimum supply is 30 tons.

FUEL: Supplied by trucks, or supplied by special barges. 24 hours advance notice required.

CONSULS: All Consulates in Tel-Aviv approx. 40 km. Available by telephone.

REPAIRS: No dock, but minor repairs effected.

GANGWAY/DECK WATCHMEN: Private companies supply gangway watchmen, obtainable through Agent.

OPENING/CLOSING HATCHES: Performed by stevedores. Mechanical hatch covers operated by crew.

CUSTOMS ALLOWANCES: 200 cigarettes, 1 open bottle of spirits per person.

IDENTITY CARDS: Issued by port police on arrival.

TIME: Local standard time is 2 hours ahead of GMT.

AIRPORT: Lod, served by regular air lines, distance 35 km.

HOLIDAYS: Port business is suspended on the following holidays: Saturdays; The 2 days of the Jewish New Year (Rosh Hashana); The Day of Atonement (Yom Kippur); The first and the last day of the Feast of Tabernacles (Sucot); The first and the last day of Passover (Pesah); Pentecost (Shvuot); Independence Day. The first of May is observed by the port workers as Labour Holiday and therefore no work is done in the port on that day.

POLICE/AMBULANCE/FIRE: Police, Ambulance, Fire Services, telephone 22222.

REGULATIONS:

Stand by for moving vessels: The Master or person for the time being having charge of a vessel shall ensure that adequate officers and crew are available and that the main propelling machinery of the vessel is maintained for moving the vessel at 1 hour's notice.

No vessel may drop steam, dismantle engine or otherwise interfere with the propelling power of the vessel, nor may the vessel be left unattended by responsible officers and crew unless permission to do so is first obtained in writing from the Harbour Master.

Photographing: Photographing in the Port Area is strictly forbidden without a written permit issued by the Security Officer of the Port.

Swimming: Swimming in Ashdod Harbour is strictly forbidden and Masters should instruct their crews accordingly.

Use of ship's boats: The use of ship's boats is forbidden in Ashdod Port. Launch service is available for the convenience of ship's personnel.

Shore leave: Shore leave passes are obtainable at the Frontier Control Section of the Port Police Station. Applications for the passes shall be filed with the Boarding Officer, Port Police.

All breakwaters are out of bounds to crews of merchant vessels.

AUTHORITY: Israel Ports Authority.

EILAT (Elath): 29.32 N. 34.57 E. (See Plan Book)

DOCUMENTS:

For Customs:

Customs Questionnaire, Crew Customs Declaration, Stores List, Crew List, Passengers List, Foreign Currency List, Narcotics List, Arms List, Import Cargo Manifest, Transit Cargo Manifest.

For Quarantine:

Maritime Declaration of Health, Valid Vaccination Certificate for smallpox all crew and passengers, Deratisation Exemption Certificate.

For Border Control:

1 Police Questionnaire, 2 Crew Lists, 2 Passenger Lists, Seamen's Books and travelling documents of passengers.

PILOTAGE: Compulsory, ordered through Agent. When unable to contact Agent, Pilot can be ordered by contacting Harbour Master by Eilat Radio, or by VHF Channel 14. Vessel due to berth awaits opposite oil installations located approximately 2.5 cables South of the main jetty. Vessels requesting Pilot for anchoring stop opposite the North end of the main jetty. Tankers waiting Pilot for oil installations to stop 0.5 mile South of oil installations. Pilot motor launch, red hull, green superstructure amidships stationed at North end of main jetty. Pilot ladder complying with all safety regulations and properly lighted during dark hours is necessary. Vessels awaiting Pilot should anchor only in designated area.

ANCHORAGES: Boundaries of area marked by lines connecting following positions;

(A)	29° 32′ 51″ N.	34° 57′ 19″ E.
(B)	29° 32′ 26″ N.	34° 58′ 34″ E.
(C)	29° 31′ 40″ N.	34° 58′ 27″ E.
(D)	29° 32′ 31″ N.	34° 57′ 06″ E.

Average depth 25 fathoms. If arriving at port for first time, do not try anchoring anywhere outside anchoring area.

Anchorage positions will be alloted by Port Control – call sign "Yamit" on VHF Channel 14.

Anchorage Positions:

(1)	29° 32.62′ N.	34° 57.37′ E.
(2)	29° 32.49′ N.	34° 57.64′ E.
(3)	29° 32.37′ N.	34° 57.97′ E.
(4)	29° 32.25′ N.	34° 58.31′ E.
(5)	29° 32.37′ N.	34° 57.34′ E.
(6)	29° 32.17′ N.	34° 57.70′ E.
(7)	29° 32.06′ N.	34° 58.04′ E.
(8)	29° 31.96′ N.	34° 58.37′ E.
(9)	29° 32.22′ N.	34° 57.02′ E.
(10)	29° 32.02′ N.	34° 57.29′ E.
(11)	29° 31.82′ N.	34° 57.65′ E.
(12)	29° 31.69′ N.	34° 58.06′ E.

MAX. SIZE: For berthing alongside main cargo jetty, length 528 m., max. draft up to 39 ft.

Additional cargo jetty length 170 m., max. draft up to 19 ft.

North Oil Jetty accommodates tankers up to 125,000 d.w.t. with draft of 56 ft.

South Oil Jetty can accommodate tankers up to 500,000 d.w.t. Depth of water alongside 94 ft.

HEALTH: Free pratique may be requested by cable via Haifa or via Eilat Radio from Quarantine Authorities. If suspected disease or fever on board immediately advise Quarantine Eilat with all details.

RADIO: Call sign Eilat Radio 4XA. Full details working hours and frequencies found in Admiralty List Radio Signals and similar publications. Good radio connection with Eilat can be obtained also via Haifa Radio, call sign 4XO, operating continuously.

TUGS: Tugs meet vessel off quay. Lines not usually used as tugs usually push. When needed, ship's lines used. 1 tug 2,750 h.p., 1 tug 960 h.p., 1 fire-fighting tug 280 h.p. and 5 tugs 100–180 h.p.

BERTHING: No difficulty except at times of strong Southerly winds when small vessels may have to leave quay and proceed to anchorage or sea, due to strong swell.

Additional cargo quay 662 ft. in length with max. draft alongside of 22 ft. completed and brought into operation.

BULK HANDLING FACILITIES: Bulk elevator for bulk loading (Phosphate & Potash) capacity 800 m. t.p.h.

Storage Area:

Sheds – 17,000 sq. m.

Open storage – 30,000 sq. m.

Cold storage warehouse – 500 tons.

Bulk potash shed – 40,000 tons (6,000 sq. m.)

Phosphate bulk shed – 35,000 tons (3,300 sq. m.)

CRANES: 5 heavy cranes, 25 tons capacity. 2 cranes, 5-10 tons capacity. 1 crane, 15 ton capacity. 1 crane 60–80 tons capacity.

Port is fully equipped for container handling. Container traffic exceeds 12,000 units per year.

STEVEDORES: Booked by ship's Agent. All details of cargo distribution and storage to be cabled in advance to Agent.

Port working hours:

Summer: (May 16th – October 15th)
Sunday – Thursday 0530–1330 and 1600–2300 hrs.
Friday 0530–1230 and 1400–2000 hrs.
Winter: (October 16th – May 15th)
Sunday – Thursday 0600–1400 and 1530–2230 hrs.
Friday 0630–1300 and 1400–2000 hrs.

MEDICAL: Hospital facilities available. Crew members or passengers must have valid international certificate for smallpox.

DENSITY: 1030.

FRESH WATER: Available in unlimited quantities and supplied at all jetties. No facilities for supplying fresh water at anchorage.

FUEL: All grades supplied in any quantity by barge.

OPENING/CLOSING HATCHES: Normally by stevedores.

CUSTOMS ALLOWANCES: Every Crew member is permitted to keep 200 cigarettes or equivalent amount of other tobacco, out of bond. Every crew member is permitted to keep 1 bottle of spirits and 1 bottle of wine, out of bond.

IDENTIFICATION CARDS: Every crew member going ashore should have a shore leave pass. Shore leave passes will be received from the border control officer after the vessel is cleared.

CONSULS: There are no consulates in Eilat. All consulates are in Jerusalem or in Tel-Aviv.

REPAIRS: All afloat deck and engine repairs can be performed by local workshops.

DRY DOCKS: Syncrolift with lifting capacity of 1,200 tons.

REPATRIATION: There are all facilities for arranging repatriations or crew changes.

AIRPORT: Eilat Airport is used at present for internal traffic only. There are 8 flights daily from Eilat to Tel-Aviv except on Saturdays. From Tel-Aviv there is good transportation to Lod International Airport.

TIME: Local time is GMT plus 2 hours; no Summer time is kept.

HOLIDAYS: No cargo work is usually performed during official holidays or Saturdays. The official holidays are: Passover (2 days during April); Independence Day (1 day end April/beginning May); First Harvest Day (1 day end May/beginning June); Jewish New Year (2 days, September); Day of Atonement (1 day end September); Feast of Tabernacles (2 days, October). No cargo work is usually performed during 1st of May although it is not an official holiday.

TELEPHONES: At present there are no facilities to arrange telephones on board ships.

SHORE LEAVE: Crew members are granted shore leave.

DELAYS: Normally vessels arriving after midnight are berthed only at daybreak, before the beginning of the morning shift.

AUTHORITY: Israel Port Authorities.

HAIFA: 32.49 N. 35.00 E.

DOCUMENTS:

1 Photograph of each member of the crew.
3 Crew Lists, and Crew Passports or Seamen's Books.
1 Provisions List.
1 List of Articles in possession each Crew member – cameras, binoculars, radios, cigarettes, tobacco, etc.

Master to declare firearms and rounds of ammunition.

4 Passenger Lists.

Stowage Plan and Manifest to be mailed in advance, preferable Master to cable 78 hours before arrival holds workable and gangs required, also draft forward and aft on arrival.

PILOTAGE: Compulsory for all merchant and foreign naval vessels. Pilotage service is rendered round the clock. Vessels are boarded by Pilot seaward of the main breakwater.

ANCHORAGE: Vessels shall not anchor within the prohibited areas and must keep clear of the fairways of the main harbour and Kishon Zone.

MAX. SIZE: The width of the entrance channel to the main port, between the main and lee breakwaters, is 183 m. The depth of the entrance is 12 m. The width of the entrance to the Kishon Harbour is 70 m., with a min depth of 8.50 m. Vessels of max. draft 35 ft. can be safely accommodated in the main port: in the Kishon Harbour accommodation is limited to vessels of 27 ft. draft. Depth in both harbours are maintained by dredging at regular intervals.

Tankers: Up to 50 ft. draft at buoy moorings.

RADIO: Radio-telephone service from ship-to-shore and vice versa via Haifa Radio, call sign 4XO. Ships in port may also be connected to the Israeli telephone system.

The port has a signal station equipped with a modern 60 kw VHF installation, working on Channels 12, 14 and 16. The station is licensed for port operation only and is in continuous service. For all other ship-to-shore communication contact Haifa Radio, call sign 4XO.

The Israeli Meteorological Service broadcasts twice daily the weather forecast in English for East Mediterranean area over Haifa Radio.

Vessels approaching the coast of Israel shall report their position to the Israeli Authorities in accordance with the following procedure:

(a) Every foreign vessel bound for the ports of Haifa, Ashdod or Ashkelon shall send a position report to the Israeli Ministry of Transport (IMOT) via Haifa Radio (4XO). Such position report should be sent in the form of a free of charge service cable when the vessel arrives at a distance of 50 miles from the coast and it shall contain vessel's name, position, course, speed and destination.

(b) In addition to the report, in *(a)* above and according to the ports' regulations, every vessel (foreign or Israeli) entering the Israeli territorial waters shall send a position report which shall contain vessel's name, position, course, speed and destination and which shall be sent at the time the vessel enters territorial waters (12 miles) to:

(1) The nearest Port Operation Services, by means of VHF; or

(2) The IMOT via Haifa Radio (free of charge service cable) in cases where VHF communication with the nearest port cannot be established.

HEALTH: Free pratique by radio is granted on request by the International Quarantine Message to the Quarantine Station round the clock (including holidays) via Haifa Radio, call sign 4XO on 500 kc/s.

Medical advice by radio for all ships may be obtained through Haifa Radio 4XO free of charge. Call "Medico Haifa".

There is no special quarantine anchorage.

Vaccination against smallpox is required from arrivals, except those who were resident in a European country, in Canada or in the U.S.A. for more than 14 days before disembarkation in Israel, provided those countries are free from smallpox.

TUGS: Vessels obtain tug assistance, if required, for entering or leaving the harbour and for shifting. 2 tugs of 1,500 h.p. and 1 of 1,000 h.p.

BERTHING: Ships moor normally to wharves and jetties, and to a lesser extent stern to the main breakwater and alongside dolphins.

Main Harbour

The main harbour is situated on the Southern shore of Haifa Bay at Lat. 32° 48′ N., Long. 35° 01′ E. It is protected by 2 breakwaters: the main breakwater, 2,210 m. long, in the North, and the lee breakwater, 745 m. long, in the East.

The harbour basin covers an area of 1,038,000 sq.m. (about 255 acres). The main port's land area amounts to 642,000 sq.m. (about 158 acres).

Kishon Auxiliary Harbour

To the East of the main port, around the lower reaches of the Kishon rivulet, lies the Kishon Auxiliary Harbour. It consists of an outer harbour basin that is protected by 2 breakwaters of 600 m. and 350 m. length respectively, and a main channel of 1,045 m. length, of which the first stretch of 700 m., measured from the entrance to the outer harbour basin, has a depth of 8 m. while the second stretch of 345 m. has a depth of 6.50 m. A side channel, 213 m. long and 4 m. deep, which branches off the main channel toward the East, serves as a fishing dock. Another side channel 350 m. long and 8 m. deep serves as holding basin of the shipyard and the Chemicals Terminal.

Wharves

Main Port	*Length metres*	*Depth metres*
Main Wharf	171	9.4
	400	9.4
	270	11.5
	40	11.5
	40	11.5
	170	9.0
	48	9.0
Cargo Jetty	205	9.0
	85	9.0
Oil Jetty	350	10.7
	330	9.8
East Lighter Wharf	110	4.4
West Lighter Wharf	220	3.0
Kishon Zone		
Cargo Wharf	100	6.5
	540	8.0
Fishing Dock	213	4.0
Chemicals Wharf	325	8.5

BULK HANDLING FACILITIES: *Coal:* Coal imports are usually handled by grabs fixed to shore cranes.

Grain: 2 mobile elevators on main wharf with combined unloading capacity of 465 t.p.h. A third elevator has a nominal capacity of 600 t.p.h. and is operating at 300 t.p.h. in the 1st Phase.

Chemicals: Chemicals in liquid bulk unloaded and loaded at chemical tank farm in Kishon Zone. Terminal jetty suitable for tankers up to 20,000 d.w.t. with draft 22 ft. 6 in. Storage capacity 45,000 cu.m.

Containers: Presently containers are discharged and loaded in the Western area of the port and Kishon Harbour, having all facilities to handle 20 ft. and 40 ft. containers. A container terminal is in the process of being established in the Eastern part annexed to the Oil Dock Breakwater. All container handling equipment available.

CRANES:

	No.	Capacity (Tons)	Radius (m.)
Floating Derrick	1	100	
Portal Cranes	2	3	20
	2	3	25
	12	5	25
	3	15	30
	6	25	30
Mobile Cranes	4	5–6.5	
	9	8–13	
	3	25	
	2	28–30	
	2	50	

CONTAINER HANDLING EQUIPMENT:

	No.	Capacity under spreader (tons) (20′-40′ containers)	Reach from quay (m.)	Height of lift (m.)
Container Quay	1	35	32	22
Gantry Cranes	1	35	32	26.5

	No.	Capacity (tons)
Rubber-tyred	2	30.5
Portal Cranes	3	40

TANKERS: Up to 4 oil tankers can be accommodated at one time at the Oil Jetty, 2 on each side (draft 28 ft.–33 ft.).

In the Roadstead.

There are 3 submarine oil loading and unloading berths, each connected to a submerged pipe-line, 2 to 12 in. dia. pipe-lines and 1 to a 32 in. dia. pipe-line.

Berth No.	Situation in relation to harb. entrance	Diameter	Extension from shore	Direction	Depth under water
1	1.75 m. N.E.	12 in.	4,200 ft.	307°	52 ft.
2	1.25 m. N.E.	12 in.	4,500 ft.	290°	52 ft.
3	0.50 m. N.E.	32 in.	10,000 ft.	319°	58 ft.

The signal station ashore opposite berth No. 3 has 2 signal masts. Vessels moor with their own 2 anchors ahead and mooring lines to 2 buoys astern. The Oil Company's Mooring Master supervises the connecting and loading or discharging, remaining aboard until sailing time.

Throughput Rates

Vessels load or unload up to 1,000 t.p.h. through 10 in./12 in. pipe-lines on the Oil Jetty and up to 700 t.p.h. at the 12 in. pipe-line submarine berths. The 32 in. pipe-line berth is destined for loading or unloading supertankers at the rate of up to 2,000 t.p.h.

MEDICAL: Hospital facilities available. Agent will board vessel with company doctor if so required by the Master.

FRESH WATER: Drinking water is plentiful and of satisfactory quality; no treatment is needed as water is frequently examined and chlorinated when required. The water is supplied by hydrants from shore or by water-barge at a delivery rate of 30–50 t.p.h. Boiler water not available.

FUEL: The following grades of oil are available for supply as bunkers:

Heavy Fuel Oil	1,500 secs. Red. 1 at 100° F.
Light Fuel Oil	450 secs. Red. 1 at 100° F.
Marine Diesel Oil	Standard Grade

The oil is supplied direct from Oil Dock or from barges. Bunkers are normally supplied between 0700 and 1515 hrs. on working days; at any other time by special arrangement. Delivery rate from Oil Dock is up to 500 t.p.h. (3,500 bbls.) and from barges up to 150 t.p.h. (1,000 bbls.)

REPAIRS: Israel Shipyards Ltd. run a modern shipyard, situated in the Kishon Zone, capable of building ships of up to 25,000 d.w.t. and to handle hull repairs, conversions, engine repairs and repairs of electric equipment.

The yard operates 2 floating docks with a lifting capacity of 7,500 and 1,100 tons respectively.

Vessels which need no dry docking can be repaired at the shipyard's quay, totalling 400 m. length with 7–8 m. depth. Ogen Ltd. also undertake ship repairs.

Floating Dock with lifting capacity of 20,000 tons near completion.

STEVEDORES: Enable Agent order gangs, important obtain 48 hours advance accurate ETA from vessel. Failure give precise ETA may result in ship losing 12/24 hours, also cost gang waiting time. No work on official holidays.

Working Hours

Work is usually carried on in 2 shifts: the first shift is from 0630 to 1430 hrs., on ordinary working days, or from 0630 to 1330 hrs. on the eve of Saturdays and holidays. The second shift is from 1530 to 2230 hrs. on ordinary working days and from 1330 to 2030 hrs. on the eve of Saturdays and holidays. Occasionally, in order to complete work on a ship or for special cargoes, a third shift is worked.

GANGWAY/DECK WATCHMEN: Not compulsory. Port guard keeps gangway watch.

OPENING/CLOSING HATCHES: Performed by Stevedores. Mechanical hatch covers operated by crew.

CUSTOMS ALLOWANCES: 200 cigarettes, and 1 open bottle of spirits per person.

IDENTITY CARDS: Issued by port police on arrival.

TIME: Local standard time is 2 hours ahead of G.M.T.

AIRPORT: International air connection from Lod Airport, 105 km. from Haifa.

CONSULS:

Austrian
Belgian
Ivory Coast
Guatemala
Danish
Holland
Yugoslavian
Greek
Liberian
Norwegian
Spanish
Finnish
Panamanian
French
Swedish

HOLIDAYS: Port business is suspended on the following holidays: Saturdays; the 2 days of the Jewish New Year (Rosh Hashana); the Day of Atonement (Yom Kippur); the first and the last day of the Feast of Tabernacles (Succot); the first and the last day of Passover (Pesach); Pentecost (Shevuot); Independence Day. The first of May is observed by the port workers as Labour Holiday and therefore no work is done in the port on that day.

GENERAL:

Persons Boarding Vessels

No person shall be allowed on board any vessel unless he is in possession of a boarding pass which must be shown on demand to the police officer at the gangway.

Passes for boarding cargo vessels on business are issued by the Port Management; passes for boarding cargo vessels for any other purpose and passes for boarding passenger vessels are issued by the Frontier Control Section of the Port Police.

Swimming

Swimming in Haifa Harbour is strictly forbidden and Masters should instruct their crews accordingly.

Use of Ship's Boats

The use of ship's boats is forbidden in Haifa Port. A public motor-launch service is available for the convenience of ship's personnel. The signal to call the motor-launch is as follows:

By day: The international Code of Signals Flag "N" hoisted at the yard.

By night: Repeated flashing light signalling of the International Morse Signal "N".

Photographing

Photographing in the port area is strictly forbidden without a written permit issued by the Commander of the Port Guard.

SHORE LEAVE: Shore leave passes are obtainable at the Frontier Control Section of the Port Police Station. Applications for the passes shall be filed with the Boarding Officer, Port Police. All shore leave passes must be surrendered to the Boarding Officer before departure of the vessel.

DEVELOPMENTS: *Developments in progress:* Two projects, running concurrently, form the first stage of the development. One of the projects refers to the construction of a new Container Terminal within a specially designed containerships basin outside the existing breakwaters. The second project deals with the deepening and extension of the Kishon basin.

The Container Terminal will consist of 800 m. of quay front, with water depth reaching 14 m. below M.S.L. and a land area covering over 30 hectares.

The Kishon basin development provides for the construction of a 600 m. extension to the existing quay, which itself will be reconstructed and deepened. The extension, with the water depth reaching 11 m. below M.S.L., will provide specialized berths for handling scrap iron, logs and unitized timber.

The Kishon basin extension will make it possible to proceed with the development of the Industrial Port and Free Zones within the Kishon area of Haifa Port, where an inland Auxiliary Distribution Centre, covering an area of some 20 hectares is under construction.

Both the Container Terminal and the Kishon Basin projects are in advanced stages of detailed planning and their completion is expected toward the end of 1978.

AUTHORITY: Israel Ports Authority.

NOTES

Please also advise Shipping Guides Ltd.

Italy

ANCONA: 43.37 N. 13.32 E. (See Plan Book)

PORT LIMITS: A vessel is considered to have "arrived" when she anchors in the roads 1 mile from the red light located at the end of Foraneo breakwater and also when, in the case of a vessel of large tonnage she anchors a further mile out and communicates her time of arrival.

DOCUMENTS: Immediately after arrival and shortly prior to departure, the Master must complete the arrival and departure forms supplied and send them to the Maritime Authority.

When the Pilot is on board, the Master must submit to the other authorities Customs, Police and Health the following further documents:

4 Copies Crew List
1 Copy Provisions List
1 Copy B/L for every set
1 General Cargo Manifest
3 Copies of Crew Dutiable Articles
5 Copies Passenger List (in transit or otherwise).

PILOTAGE: The Ancona port Pilots listen 24 hours a day on VHF Channel 12. Telegraphic address: Piloti – Ancona. Telephone: 071/23964. Pilotage, compulsory for all tankers and all vessels over 500 g.r.t. Pilotage starts within a radius of 1 mile from the port entrance.

There are 3 pilot cutters operated by the Pilots' Association. Vessels waiting for a Pilot must hoist the "G" flag of the International Code of Signals and await him in the roads.

The pilots' station is in a building located near the angle between Berths 1 and 2. There are 4 Pilots available.

BERTHING: See table below.

ANCHORAGE: In the roads at the Master's discretion. The advice of the Pilots may be sought via VHF. Anchorage in the roads is safe with winds coming from the 2nd and 3rd quadrants.

RESTRICTIONS: Vessels may enter and leave port day or night. The entry and departure of vessels of large tonnage and draft is governed by the tide which has an approximate range of 2 ft.

Normally, tankers carrying petrol or vessels carrying hazardous goods in category "A" are not allowed to enter port.

MAX. SIZE: In the port of Ancona, the entry of vessels up to 250 m. length is permitted. At the oil installations located outside the port, tankers over 300,000 d.w.t. can berth in water depth 33 m. At the oil installations located closer to the coast, tankers of 27 ft. to 40 ft. draft can berth. (See "Tankers".)

HEALTH: There is a maritime health station in the port. Free pratique may be granted to an anchored vessel by radio (by calling up "Sanimare Ancona" 12 to 6 hours prior to arrival) for vessels coming from countries not affected by health strictures. If fever is suspected aboard a vessel, she must anchor in the roads. hoisting the appropriate International Code of Signals flag, and waiting for the port doctor to come on board.

RADIO: Ancona Radio "ICA" uses calling frequency 500 kc/s and a working frequency of 489 kc/s. Radio telephone: Ancona Radio P.T. "ICA" on 2182 kc/s. VHF: calling up Channel 16 and working Channels 25, 26 and 27. Station maintains 24 hours watch.

RADAR: There is no radar station in the port.

VHF: Port Authority on VHF Channel 16 from 0800–2200 hrs.

TUGS: Use of tugs in port is not compulsory but may be requested by Pilot or ordered by the Port Authority if necessary. From 0700 to 1700 hrs., there are always 3 tugs available, and from 1700 hrs. there is 1 tug available.

Requests for additional tugs can be made via the ship's Agent a

Berth No.	*Location*	*Length (m.)*	*Depth alongside at distances from quay face: Distance – Depth*	*Max. size g.r.t.*	*Utilisation*	*Cranes*
1	Clementino Mole	250	1 m. – 9.14 m. 5 m. – 9.44 m. 10 m. – 9.90 m.	75,000	Load/discharge Dry goods, lumber, coils, palletised cement.	2×6 tons 2×10–20 tons
2	Luigi Rizzo Mole	189	1 m. – 9.14 m. 5 m. – 9.30 m. 10 m. – 9.75 m.	35,000	Load/discharge Dry goods (phosphate, china clay, carbon etc.)	2 discharging platforms ×8 tons on rails and 1×12 tons (being renovated)
3	Luigi Rizzo Mole	116	1 m. – 9.14 m.	25,000	Loading/discharging General and containers	Mobile cranes of 6.3–20 tons 2×5 cu.m. grabs available.
4	Luigi Rizzo Mole	200	5 m. – 10.30 m. 10 m. – 10.36 m.	35,000	Loading/discharging Bulk commodities and general	2×6 tons
8	Near Shipyard	122	1 m. – 7.62 m. 5 m. – 8.70 m. 10 m. – 8.70 m.	10,000	Bulk goods	Mobile cranes of 6.3–20 tons
Head	At head of No. 8 Berth	47	1 m. – 7.62 m.	8,000	Containers, Passengers Lorries	—
9	South of No. 8	124	1 m. – 7.62 m. 5 m. – 9.14 m. 10 m. – 9.14 m.	10,000	Passenger vessels and Naval vessels	—
11	S. Maria Mole	147	1 m. – 7.92 m. 5 m. – 9.40 m. 10 m. – 9.14 m.	15,000	Passenger vessels	—
12	S. Maria Mole	75	1 m. – 7.92 m. 5 m. – 7.40 m. 10 m. – 7.31 m.	4,000	Passenger vessels	—
13	S. Maria Mole	155	1 m. – 9.00 m. 5 m. – 9.75 m. 10 m. – 10.70 m.	20,000	Passenger vessels and Customs warehouse	—
14	Calata della Republica	194	1 m. – 9.00 m. 5 m. – 9.00 m. 10 m. – 10.50 m.	25,000	Passenger vessels, General and timber	Mobile cranes 6.3–20 tons
15	New Eastern container area (North side)	214	1 m. – 9.14 m. 5 m. – 9.80 m. 10 m. – 10.20 m.	35,000	Containers, heavy lifts, Timber.	1 multi-purpose gantry crane 42 tons capacity.
16	New Eastern container area (South side)	120	1 m. – 7.92 m. 5 m. – 10.00 m. 10 m. – 11.40 m.	12,000	Containers	—
17	Giovanni Berth	60 (Useable)	1 m. – 7.00 m.	5,000	General	—
18	—	113	1 m. – 8.22 m.	10,000	Coastal and small vessels	—
19–20	South Breakwater	295	1 m. – 8.22 m. 5 m. – 10.10 m. 10 m. – 12.50 m.	75,000	Bulk discharge	2 suction plants each 2,000 t.p.h. Silos: 38 cells for cement and 4 cells for iron.
21	South Breakwater	141	1 m. – 8.54 m. 5 m. – 9.90 m. 10 m. – 12.50 m.	75,000	Loading/discharging of cereals	2 suction plants each with capacity of 125 t.p.h. on rails. Storage capacity 21,600 cu.m.
22	South Breakwater	195	1 m. – 9.30 m. 5 m. – 10.50 m. 10 m. – 12.00 m.	35,000	Loading/discharging cereals, loading/ discharging goods by hook	2×6 ton cranes 2 suction plants capacity 140 t.p.h. each.
—	Maraldi Landing Stage	220	6.5 m.	3,000	Discharging of cargo for company's plant	1×25 ton crane 1×15 ton crane

few hours prior to the vessel's entry in port, this order to be made to Sadar S.p.A. Telegraphic address: Sadar S.p.A. Telephone: 071/24041. Tugs wait for vessel 1 mile from the port entrance and work on VHF Channel 12.

SPECIAL CARGO HANDLING FACILITIES: Berth No. 15 has a multi-purpose electro-hydraulic crane particularly suited for containers up to 40 ft. and for lifting conventional cargo up to 42 tons. The quay space behind is currently used as a container terminal.

By 1980, a new handling area at Berths Nos. 23, 24 and 25 will come into operation with an area of 15 hectares and whose berths will have cranes particularly suited to container handling.

Adjacent to the port, in the Ancona Port Industrial Zone there is a private area with Customs sheds for retention and movement of containers. This area covers 16,000 sq.m.

For ro–ro traffic there is no special equipment, but this type of traffic can be handled at almost all the berths.

BRIDGES: None have to be negotiated when entering the port.

STEVEDORES: The Compagnia Lavoratori Portuali operates in the port. Telephone: 071/22629. Telegraphic address: Compagnia Lavoratori Portuali Ancona. Requests for labour are made via the ship's Agent at least 24 hours prior to commencement of operations.

MEDICAL: There is an Italian Naval hospital in the port area close to Berth No. 10. It is reserved for personnel of the Italian Navy. Telephone number (M.M. exchange) 201392. There is a permanent service available.

Apart from this, there are in the town a main hospital "Umberto 1°" with 1,000 beds, a 400-bed pediatric hospital, a cardio-rheumatological hospital, 2 geriatric hospitals, a neuropsychiatric provincial hospital, and a hospital specialising in tumours. There are also two private clinics with medical and surgical facilities.

TANKERS: *API Jetty:* 4 berths for tankers up to 18,000 g.r.t. Depth alongside: 9.0 m. Products handled: petrol, paraffin, pure naphtha, black oil. Ballast water accepted. Each berth has 8×6 in. lines pumping rate – 500 cu.m.p.h.

API Inner Buoy Mooring: Mooring buoy for tankers up to 50,000 d.w.t. Depth of water: 12 m. Products handled: Crude oil and refined products. 3 loading and discharging hoses capacity 800/900 cu.m.p.h. for each hose.

SFIR Mooring: Mooring dolphins for tankers up to 10,000 g.r.t. Products handled: Refined products. Bunkering is carried out at this buoy. 3 pumps available, 1×360 cu.m.p.h., 1×200 cu.m.p.h. and 1×150 cu.m.p.h.

API Sea Terminal

The API sea terminal consisting of a single steel platform mooring for vessels over 300,000 d.w.t. and is located off Ancona harbour in position:

Latitude: 43° 44′ 37″ North
Longitude: 13° 31′ 15″ East

It has a minimum depth of water of 98 ft. at LWS. The platform, fixed on 6 steel piles sunk into the sea bottom is connected to the shore tanks by an underwater sea line 40 in. diameter.

On the platform there is a cardan joint from which 2 floating hoses 24 in. diameter depart and converge into a single line 24 in. diameter (average discharging rate 7,000 c.m.p.h.) at the top of which are connected 2 lines of 16 in. diameter that end with special floating hoses (Tanker MS-GI) for connection to the ship.

Each tail hose is fitted with a quick closing valve to prevent risk of pollution.

The platform has a diameter of 82 ft. and is fitted with special rubber fenders.

Platform Light:

Light: White – Code Letter: "U" – Height a.s.l.: 39 ft. Period: 15 sec.

Light Characteristics:

1) Light:	0.5 sec.	4) Eclipse:	1 sec.
2) Eclipse:	1 sec.	5) Light:	2 sec.
3) Light:	0.5 sec.	6) Eclipse:	10 sec.

Range: 6 miles

Foghorn: Code Letter "U" – Range: 3 miles.

Characteristics:

1) Blast:	1 sec.	4) Silence:	2 sec.
2) Silence:	2 sec.	5) Blast:	2 sec.
3) Blast:	1 sec.	6) Silence:	22 sec

The platform is equipped with radar reflector.

Weather and Currents:

Weather is generally good from May to the end of September. During the Winter time bad weather prevails from N.E.

The N.E. wind commonly named "Bora" is the strongest and the most frequent. The Easterly sea, which does not occur often, is generally strong. The Westerly winds generally cause fog or mists which, particularly in Winter, is very thick.

For approximately 8 to 9 months of the year the current sets in a S.E. direction whilst for the rest of the year, it is running in opposite direction.

The strength of the S.E. current is variable from 2 to 6 knots, therefore, in consideration of these facts neither engine repairs nor engine maintenance are permitted during the time the vessel is secured to the API platform and the main engine must be on permanent standby and ready for manoeuvring.

Radio/VHF:

Vessels bound for Falconara must send their ETA to Petroapi – Falconara 72, 48 and 24 hours before their arrival.

In the last message the following information must be reported:

1) Maximum lifting capacity (s.w.l.) of derricks
2) Distance between bow and manifolds.
3) Diameter and type of manifolds flanges.
4) Whether the cargo tanks are equipped with inert gas system.

5/6 hours before arrival VHF contact can be established with the refinery maritime office on Channel 12.

Anchoring:

Vessels waiting for berth may anchor in a position approximately 1.5 miles Eastward off the platform. Ideal position for anchorage is:

Latitude: 43° 45′ 00″ North
Longitude: 13° 33′ 00″ East.

or as otherwise instructed. Vessels are warned to anchor only in the recommended position because of the existence of submarine pipe-lines in other areas.

On Arrival:

The refinery operator, together with a team of 4 skilled workers, will board the vessel before berthing to coordinate the discharging operations and they leave after completion of unmooring. Masters are therefore kindly requested to, arrange for food and accommodation for the whole period of their stay aboard.

Mooring Operations:

Mooring operations will be undertaken with favourable weather conditions. The vessel shall proceed at a reasonable speed to the platform and generally shall start mooring by heading into the sea current or wind or swell.

As soon as the vessel is a proper distance from the platform she will run out 2 mooring ropes (1 on each side) which will be secured to the platform ropes by mooring crew. These ropes will then be heaved on board in order to pull up the platform ropes which will be secured on the bitts of the forecastle. The platform mooring ropes comprised of nylon rope, chain and polypropylene rope and pelican hooks will be used as stoppers for the chains.

4 mooring lines (2 for each side) must be ready on the forecastle for joining before manoevring to the platform.

The refinery operator shall not fail to give to the deck officer on duty on the forecastle all requested information concerning mooring operations as well as API's installation. All winches and windlass must be in perfect working condition with sufficient power and ready to work during the whole of the vessel's stay at the API platform. A good mooring rope of sufficient length must be ready aft and passed to the supply vessel enabling her to assist the tanker from the end of mooring up to few seconds before unmooring. Mooring operations will be carried out by the crew, under the Master's responsibility and according to the Pilot's suggestions.

During the ship's stay at the platform, the crew and API personnel will keep a constant watch on the mooring ropes and the platform. During the night the forecastle and mooring ropes must be brightly lit.

Unmooring:

The unmooring operations, except during unfavourable weather conditions, are quite simple. As soon as the 2 hoses have been disconnected, it will be sufficient to let go the supply vessel, heave up, as quickly as possible, the stern rope, then let go the 2 platform ropes, and put the main engine astern (if necessary). Masters are warned that as soon as the hoses are disconnected the service of the supply vessel will no longer be required.

Hose Handling:

On arrival both derricks must be rigged and ready to lift up the maximum permissible weight.

Throughout the period of time when the hoses are hoisted up, connected, disconnected or lowered overboard, 1 deck officer and 1 Crew member are required to coordinate and operate the winches. Lifting, connecting, lowering and other handling of hoses will be performed by API's team under the Receiver's representative control.

Discharging Operations:

The Receivers' representative will advise the Master on all matters concerning the discharging speed, manifold pressure, or eventual hazards, but will not direct the discharging operations except if it may be necessary to protect the facilities or any Receivers' properties or apparatus.

Pollution:

The Master is fully responsible and must ensure that no petroleum or other contaminated products are discharged, or spilled overboard.

During the vessel's stay at the API installation, all deck scuppers and all overside deck openings shall be securely closed and oiltight. All pipe-lines not in use, must be blanked off.

Drip-pans must be in place at all times under manifold connections. An adequate supply of sawdust bags, or other anti-pollution chemical products, must be available at all times for immediate use.

Under no circumstances shall bilge water, oil, waste, or contaminated products be discharged overboard.

The Receivers will take any action or steps necessary to clean up or remove the contamination of the sea and the terminal structures if any. The vessel and/or her Owner, will be responsible for all expenses and all damage in connection with the contamination.

Italian Authorities are very strict and severe about pollution. It is worthwhile to remind Masters of the eventual penal implications against them for pollution.

Safety:

During the vessel's stay at the API terminal a sufficient number of Crew members must remain on board to be ready for any kind of emergency. Crew members going ashore are warned that in case of bad weather it might not be possible to return on board until weather conditions have improved.

All fire equipment and hoses must be, at all times in perfect working condition and ready for use. A number of portable fire extinguishers must always be ready by the discharging manifolds and the breathing apparatus must be ready by the pump rooms for immediate use.

Main Engine and Auxiliaries:

Should the main engine and/or auxiliaries be temporarily out of use, the discharging operations will immediately be stopped, and vessel unmoored, until everything is once again in order. In such a case all expenses, delays and/or all arising damages will be to the account of vessel and/or her Owner.

Tending Mooring:

A Crew member must be stationed at the bow of the ship while the vessel is at the platform to keep a constant watch on the moorings.

During the hours of darkness moorings must be illuminated.

Winches:

During the stay of the vessel at the terminal all deck winches must be ready to operate.

Supervising discharging operations:

The receivers' personnel will remain on board for the whole time. A qualified deck officer must always be available. It is recommended that the duty officer always carries with him a portable VHF in order to keep close and constant contact with Receivers' representative.

Supervising floating hoses:

Whilst the vessel is secured to the platform a sharp lookout on floating hoses must be ordered by the Master. Every abnormal situation in this respect must be immediately notified to Receivers' representative.

Washing Floating hoses:

When discharge is completed, if requested, the vessel will pump water for a few minutes before disconnecting hoses, in order to displace crude-oil from the floating-lines. The Receiver's representative will advise the Officer on duty about this manoeuvre as well as pumping time.

Communications between Ship and Shore:

Normally communications between ship and shore are maintained by API's representative. Masters are kindly requested to authorise the use of vessel's VHF when requested.

Boilers:

Boiler tubes must not be blown whilst at anchor or secured to the API platform.

Garbage:

Garbage and refuse must not be thrown overboard while the vessel is at anchor or secured to the API platform.

Bunkers:

Weather permitting, bunkers can be supplied by barges. API can supply all grades of fuel oil, marine diesel, gasoil and all grades of API's marine lube oils.

For bunker requirements vessels must cable to Petroapi – Falconara 72 hours before their arrival (holidays, Saturdays excepted) stating qualities and quantities required. (No limitations for supplying).

Fresh Water:

Available only by tugboats with favourable weather conditions, and to be requested through vessel's Agents.

IMPORTANT WARNING

All vessels with a draft up to 40 ft. scheduled for AP1 platform but not duly equipped to operate thereat, will be moored, if possible, at API conventional berths. All expenses, time lost and/or damages arising from the above will be to account of and charged to vessel/owners.

DENSITY: The average salinity of the water in the port of Ancona is 17.5 gr. per litre of chloride.

FRESH WATER: Along all the quays are numerous supply points with rates varying from 15 to 25 t.p.h. Vessels in the roads can be supplied with drinking water via the port tugs.

FUEL: Vessels moored at berths can be supplied by tanker barge. Fuel is also available at Berth No. 21 and the Soscar terminal located immediately outside the port. Vessels in the roads are supplied by barges. The supplier is S.P.A. API from their marine refinery at Falconara.

Requests for bunkers must be submitted to that company, via the ship's Agent at least 24 hours in advance. The company's telephone number is 910901. Any type of product can be supplied.

FIRE FIGHTING FACILITIES: Apart from the water hydrants along the quays, which, if need be, can be used for coupling to hoses for fire fighting purposes, the port of Ancona has a fire brigade equipped with fire engine, together with other means on land and water.

The fire brigade is near the marine station at Berth No. 13. Apart from facilities on land, there are 2 craft available, one of which is highly sophisticated. Telephone: 201715.

If necessary, at very short notice, the town fire brigade can be called to the scene, their equipment consists of a fire engine with pumps and ladders and other modern means of efficient fire fighting. Telephone: 22222.

In port, there are the following maritime means for combating fires:

a) A motor launch of the port captaincy with fire fighting hoses and also the ability to spray foam.

b) 2 motor barges with pumping facility operated by the port fire brigade, having the following characteristics:

Vessel "VV.F.207" – speed 11 knots, equipped with 2 fire fighting pumps each capable of delivering 6,000 litres per min. at a pressure of 10 atmospheres and driven by 2 Fiat Aifo 260 h.p. engines each; 2 liquid foam pumps; 2 foam projectors; 2 foam tanks with a total capacity of 5,800 litres; 20 delivery pipes with 70 UNI unions, 400 m. overall; 16 delivery pipes with 45 UNI unions, 220 m. overall; 1 comet portable projector, 2 fixed foam projectors; 16 UNI 70 hose attachment points; 2 UNI 150 ditto; 2 double tube cannons for mixed usage (water and foam); 1 electrical compressor giving 5 atm. pressure; 2×500 watt projectors of which 1 is portable with 100 m. of cable; 1 retransmitter apparatus attached exclusively to the apparatus operated by the fire brigade.

Motor vessel VV.F.102 – 1.10 m. draft, speed 11 knots with the following fire fighting equipment: 2 suction type pumps with 350 capacity each; 8 points for 70 type delivery hoses; 2×70 swivel guns; 1×100 watt adjustable fixed projector; 1 radio receiver/transmitter attached exclusively to the fire brigade's equipment; 1 self protector; 1 asbestos suit; 6 gas masks; 400 m. of 70 tube and 150 m. of 45.

6 port tugs having the following characteristcs:

Tugs "Luisella and Tiziana" – TSL 485 – speed 14 knots – equipped with 2 exhaust pumps in the deck on starboard and port sides; regulation fire fighting equipment; 2 motor driven pumps; for internal use 2 pumps connectable to those on deck; international attachments and points; equipped with radar, radio and echo sounder.

Tug "Katria Prima" – TSL 140 – speed 12.5 knots – equipped with 1 monitor; 4×45 mm. swivel guns; thermo-mechanical electric pump of 60 t.p.h. capacity; foam tank – fitted with radar; radio; echo sounder.

Tug "Luisa Davanzali" – TSL 238 – speed 12.5 knots; equipped with 1×30 t.p.h. fire fighting pump; 2 exhauster pumps of 50 t.p.h. and 1 of 200 t.p.h. capacity; radar, radio, echo sounder, gyroscopic compass.

Tug "Cesare Davanzali" – TSL 364 – speed 14 knots – equipped with 2 electrical pumps of 200 cbm/hr. capacity for delivery purposes and capable of attachment to Minimax equipment for fire fighting purposes using foam with 2 cannon type projectors; in the deck are 14 points for attachment of hoses; 2×1000 kW. adjustable projectors; 1 motor compressor of the low pressure type working at a pressure of 8 atm.; equipped with radar, radio, echo sounder.

Tug "Nuovo Ancona" – TSL 148 – engine power 1,014 h.p. equipped with 2 fixed exhauster pumps of total capacity of 500 t.p.h. driven by 2×40 h.p. electric motors; 2 fixed fire fighting pumps, of capacity of 250 t.p.h. total, driven by 2×40 h.p. electric motors; equipped with foam plant and projector; fire fighting pipes have 4 points with 70 mm. unions; 1 portable exhauster pump of about 150 t.p.h. capacity – speed 12 knots – equipped with diving equipment – radio.

CONSULS:

Swedish Consul: tel. 23252.
French Consular Agency: tel. 22879.
Dutch Consul: tel. 22614.

REPAIRS: It is possible to effect repairs of all types at yards within the port, and at the large electrical and mechanical repair undertakings in the town.

Cantieri Navali Riuniti (for large construction). Tel: 201191.
Cantiere Morini (also has available a floating dock for vessels up to 1,000 g.r.t. and slipways). Tel: 23255.
Cantiere Castracani (slipway). Tel: 23519.
Cantiere Riparazioni Navali (pleasure craft). Tel: 29866.
Cantiere Tecno-Matic (fibreglass units). Tel: 53643.
Cooperativa Metallurgica G. Tomassi (only for steel vessels). Tel: 201252.
Ditta EL.ME.A. (marine electrical equipment). Tel: 29409.
Ditta Schiavoni (marine electrical equipment). Tel: 55731.

DRY DOCKS: There is only one small floating dock in which it is possible to carry out repairs to vessels up to 1,000 g.r.t. The dock is owned by Cantieri Navali Morini. Tel: 23255.

SURVEYORS: In Ancona the Registro Italiano Navale has a town office at via Marsala No. 8. Tel: 23204. R.I.N. acts for the following foreign classification bodies. Germanischer Lloyd. Nippon Kaiji Kyokai. Jugoslavinski Registar Brodova. Register of Shipping of the U.S.S.R.

GANGWAY/DECK WATCHMEN: This service is advisable but not compulsory. In Ancona is a security firm "Istituto di Vigilanza Urbana e Campestre" di Dattilo Salvatore. Tel: 201784.

HATCHES: Hatches are opened by the crew where they are of the automatic type, and by the port labour force where they are of the conventional type. Hatches are re-closed in the event of rain.

CUSTOMS ALLOWANCES: On arrival in port, all goods under Customs exemption must be placed under seal. At the completion of Customs inspection, the Master may request the Customs officers permission to supply the following goods:

50 cigarettes for each Crew member.
1 kg. of salt for every 50 persons.
50 grams of sugar per person per day.
15 grams of coffee per person per day.
Liquor – small quantities to be agreed with the Customs officals according to the time of year.

CARGO HANDLING FACILITIES: Normal working times for mechanical equipment is from 0800 to 1200 and from 1330 to 1730 hrs.

Mechanical handling equipment on the quays consists of:

1 multi-purpose Paceco crane, of 42 tons capacity for containers and various goods.
4 De Bartolomeis 20-ton electric cranes with rectractable jib.
6 electrical cranes of 6 tons capacity, with retractable jib.

2 electrical unloading platforms of 8 tons capacity.
1 electrical unloading platform of 10/12 tons capacity.
3 automatic De Bartolomeis of 20 tons capacity.
1×5 ton automatic.

It is possible to attach electro-hydraulic grabs to the quay cranes for the discharge of scrap iron.

REPATRIATION: It is possible to effect exchange of foreign Crew members on board foreign vessels since there is in the port an office of the Frontier Police.

For repatriation purposes, the following travel connections are available:

Train: via the Ancona/Bologna/Rome line; via the Ancona to Rome direct line and via the Ancona/Pescara/Bari line.

Air: Departures from the Falconara Marittima Airport which is 10 km. from the port and reached by bus. There is a daily departure to Milan and to Pescara.

Sea: the following lines are available:

From 1st January – 31 December Wednesdays (1330 hrs.) and Saturdays (2200 hrs.) to Patras by Greek vessel "Mediterranean Sea".

From 1st October – 30th May Mondays (0900 hrs. Tuesdays (0030 hrs.) and Fridays (1700 hrs.) to Zara and Spalato by Italian vessel "Tintoretto". From 1st June – 30th September daily departure to Zara by Jugoslav vessel "Illirija". From 1st June – 30th September every Thursday (1300 hrs.) and Sundays (2200 hrs.) to Patras by vessel "Mediterranean Sky". From 1st June – 30th September every Saturday (2200 hrs.) per Panamanian vessel "Neptunia" to Patras, Corfu and Haifa. From 1st June – 30th September every Tuesday (2200 hrs.) to Patras per Greek vessel "Patris". From 1st June – 30th September every Wednesday (1300 hrs.) and Saturday (2200 hrs.) departures to Patras and Higoumenitza by Greek vessel "Ionian Star". From 1st June – 30th September every Tuesday (1700 hrs.) departures to Dubrovnik by Italian vessel "Tintoretto".

TIME: GMT plus 1 hour. From the last Saturday in May to the last Saturday in September GMT plus 2 hours.

HOLIDAYS: Every Sunday, 1st January (New Year); the Monday after Easter; 25th April (Liberation); 1st May (Labour Day); 4th May (Town's Patron Saint's Day); 15th August (Assumption); 1st November (All Saints); 8th December (Immaculate Conception); 25th December (Christmas); 26th December (St. Stephen's).

Work is possible on all these days, but at an increased rate.

POLICE/AMBULANCE/FIRE: Port Police 201030. Town Police 28888. Yellow Cross Ambulance 55622. Red Cross Ambulance 22680. Port Fire Brigade 201715. Town Fire Brigade 22222.

TELEPHONES: It is not possible to connect telephone lines on board vessels. In the port there are numerous telephone boxes for national and local communications and where it is possible to telephone to any part of the world.

SERVICES: The following special services are available in Ancona: Tank washing at Falconara Marittima by the "crude oil washing" system, compass adjusting, repairs to radar or other electronic instruments on board and underwater work.

SHORE LEAVE: Foreign Crew members may go ashore from 0800 until 0200 hrs. the next morning provided they have a pass stamped by the Port Police. Beyond 0200 hrs. a special permit from the police is necessary to allow an overnight stay outside the port area.

SPECIAL REGULATIONS: Vessels of draft greater than 30 ft. mooring at berths on the South mole are secured a short distance off the quay by means of dolphins.

DELAYS: No delays.

DEVELOPMENTS: New container areas under construction at quays No. 23, 24 and 25. There is in hand the development of new zones for Cantieri Navali Riuniti in the stretch of sea behind the North breakwater. In that area will be built a construction basin for supertankers. Both works should be completed by the end of 1980.

AUTHORITY: Capitaneria di Porto.

AUGUSTA (Including Priolo): 37.13 N. 15.14 E.

LOCATION: The bay is divided into 3 parts: Port Xifonio, the old port, once used by small vessels, now sometimes used for anchorage of ships which cannot come into Port Megarese. Port Megarese, where there are oil installations and other works. Priolo's cove, industrial zone. Priolo is the place name used to indicate the area of the Montedison installations.

DOCUMENTS:

Crew Lists (at least 6 copies).
Custom Manifest.
Passenger Lists (6 copies).
Maritime Declaration of Health.
Bills of Lading.
Vaccination Certificates.

Can be presented as an information note on the arrival of the ship to the Harbour Master. This note can be broadcast by radio or telegraph. This facilitated procedure is suspensible by Harbour Master in case of particular events and, by request, these documents must be sent in:

Certificate of Registry.
Cargo and Gear Safety Certificates.
Radio Safety Certificates.
Safety Construction Certificate.

PILOTAGE: Compulsory for vessels over 500 tons (gross tonnage). Pilot available day and night. Vessels requiring a Pilot should display appropriate International Code Signals, should approach about 1 mile from the principal entrance. Pilot boat is black with a white band, letter "P" is painted in amber on each side of the bow. Pilot boards about 1 mile from main entrance. In bad weather the launch will wait inside the breakwater by the main entrance. Pilot station telegraphic address is Augusta Piloti. ETA should be given 12 hours in advance. Vessels with VHF can contact Augusta Piloti on Channel 12.

APPROACHES: Entrance is from the East, between central and Northern breakwaters, with leading lights in a line approx. 274°. Entrance is about 400 m. in width, with a depth over 35 m. in the middle, and may be used day or night.

Another entrance from S.E. between central and Southern breakwaters used only for small ships or emergency is about 300 m. in width, with a depth of 11 m.

ANCHORAGE: Inside the breakwaters, in the central zone, the depth of water is not less than 22.40 m., and is possible to receive many ships, including VLCC's.

MAX. SIZE: Up to 65 ft. draft at Montedison new supertanker jetty, capable of receiving vessels up to 130,000 g.r.t. (250,000 d.w.t.). Also see "Berthing".

HEALTH: Pratique may be allowed by radio, request to Sanimare Augusta 24 hours prior arrival. If not requested by radio, pratique is given on arrival but only during daylight. Pratique is automatic for vessels coming from an Italian port and Common Market European Ports.

RADIO: R.T.: Augusta Radio listening on 2182 kc/s. Working on 1643 and 2260 (24 hours a day).

VHF: Augusta Radio (Ch.16) Between 0000 and 2400 hrs. working.
Harbour Master (Ch.16) Working 24 hrs. a day.
Pilots (Ch.12) Working 24 hrs. a day.
Tugs and Liners (Ch. 8) Working 24 hrs. a day.
Taxi-boats (Ch.10) From 0600 to 2400 hrs.

TUGS: Available, join vessel inside breakwater entrance. H.p. varying from 750 to 3,000.

BERTHING: *Shell Pier:* Berth Nos. 1, 2 and 3 at a finger jetty with depths of 12, 28 and 12 ft. respectively and used by coasters and bunkering barges.

Punta Cugno: Northern Jetty: Berth No. 3 Liquichimica, used for discharging and loading chemical products by Liquichimica factory. Accepts vessels up to 3,000 g.r.t. with depth 17ft. 09 in. Mooring alongside. Southern jetty: Berth No. 4, used by Esso Bunker barges. Berth No. 5, used by Liquichimica factory, for vessels up to 15,000 g.r.t., which are moored by the stern with bow anchors. Depth 30 ft. Berth No. 5bis, is at Steel Island used for chemical products discharging and loading. Ships moored by the stern with 2 anchors. Depth 22 ft.

Esso: Pier No. 1: Length of pier about 740 m. Heading 110°.

Berth No. 6: Depth 16 ft., used by small tankers loading gasoline (regular, premium, Jet A 1), gasoil, bitumen, fuel oil, LPG, 4 pipelines at berth. Connection of 4 in. for LPG, loading rate about 300 t.p.h.; 6 in. for white products, loading rate 150 t.p.h.; 6 in. for black products, loading rate 150 t.p.h. Gangway ashore.

Berth No. 7: Depth 25 ft., vessel moored by the stern. 3 pipe-lines with connection of 6 in. Loading rate 150 t.p.h. Loading of gasoline, gasoil, bitumen, fuel oil. Gangway ashore.

Berth No. 8: Depth 36 ft., for ships about 20,000 g.r.t. 4 pipe-lines at berth with connections 8 in. (2 for white products and 2 for black products). Loading of same products as No. 7. Gangway ashore. Deballasting pipe-line available for all berths. Diameter 14 in., rates from 700 to 2,000 t.p.h.

Pier No. 2: Length of pier about 1,150 m. Heading: 110° ending in a steel platform. Large tankers discharge crude oil on either side of the platform at rates of up to 6,000 t.p.h.

North side, No. 10, depth 52 ft., receiving tankers up to 50,000 g.r.t. Loading of gasoline, gasoil, fuel oil, lube oil. Connections: 6 in. for bunker, 10 in. for black and white products, 10 in. for lube oil. Gangway ashore.

South side, No. 11, depth 54 ft., receiving tankers up to 75,000 g.r.t. Loading of all products as No. 10 except lube oil. Connections 10 in.

At about 400 m. from end platform there are 2 smaller platforms (Berth No. 9 and 12).

Berth No. 9: Depth 28 ft., receiving tankers up to 7,000 g.r.t. Loading of gasoline, gasoil, fuel oil, lube oil. 4 pipe-lines with connections of 8 in.

Berth No. 12: Depth 28 ft. for tankers up to 10,000 g.r.t. Connections of 6 in. Loading of same products as No. 9. Alongside the pier pipe-lines are of diameter of 18 in. to 24 in. for crude oil, 16 in. to 20 in. for fuel oil, 14 in. for diesel and gasoil, 10 in. for kerosene, 8 in. for gasoline, 10 in. for naphtha and JP4. There is also a 14 in. pipe-line for deballasting and 8 in. lines for lube oil. All berths are provided with gangway. At Nos. 10 and 11 vessels may use wire ropes only if the eyes are made of either manila or nylon.

Cement: A finger jetty. Berth Nos. 13 and 14 with depths of 23 ft. used by small vessels carrying cement in bulk. Operations are through a conveyor-belt system, with a handling rate of about 300 tons per day.

N.A.T.O. Pier: Berths No. 15 and 16 in depths of 35 ft. and 36 ft. respectively. Used for loading and discharging petroleum products, but being a Navy jetty, berthing is subject to priority being given to Navy requirements.

Montedison: Montedison Supertanker Jetty: For vessels up to 130,000 g.r.t. Depths vary from 13 ft. to 65 ft. Berths Nos. 17 to 24. Montedison Jetty: Berth No. 25, depth 43 ft. and Berth No. 26, depth

38 ft. Steel Island: Berth No. 27, depth 33 ft., for vessels up to 20,000 g.r.t. which are moored by the stern, and secured to 4 buoys with bow anchors down. Berth used for chemical and petroleum products. All the berths have a deballasting pipe-line.

Montedison concrete jetty: Both dry and liquid chemicals are handled at this jetty. Berth No. 28, depth 18 ft., for small vessels whose length is not more than 80 m. moored by the stern. Berth No. 29, depth 30 ft., for vessels up to 15,000 g.r.t. Berth No. 31, depth 31 ft. 06 in., for vessels up to 20,000 g.r.t. Bagged cargo at a rate of 2,000 tons per day, and bulk cargo up to 4,000 tons per day, load or discharge. Berth No. 30 used by bunker barges. Berth No. 32, depth 13 ft., for small tankers only.

New Montedison jetty (Carichi liquidi): Is situated in Priolo's cove. Chemical products are handled. Berth No. 33, depth 17 ft. for vessels up to 1,700 g.r.t. Berth No. 34, depth 25 ft., for vessels up to 5,000 g.r.t. Berth No. 35, depth 25 ft. and No. 36 with a depth of 12 ft.

Melilli: *Operator:* Industria Siciliana Asfalti and Bitumi.

The terminal is situated 60 miles South of Augusta, 5 miles North of Syracuse, Sicily. Terminal consists of 1 finger pier with 3 platforms. Crude oil "C" can be loaded or discharged at all 3 platforms. Platform No. 1 can accommodate vessels up to 385,000 d.w.t., depth 130 ft. whereas platform No. 2 up to 55,000 d.w.t. Platform mainly used for coastal tankers up to 3,000 d.w.t. and LPG carriers.

MEDICAL: Medical and hospital facilities available. Vaccinations done on board. Advance notice preferred for assistance required on arrival.

TANKERS: See "Berthing".

DENSITY: 1024 to 1026.

FRESH WATER: Available by barge.

FUEL: All grades available by pipe-line or barge at anchorage, max. draft 65 ft.; suppliers Esso, Shell, B.P., Agip, Gulf. 48 hours notice required.

GANGWAY/DECK WATCHMEN: Employment of shore watchmen advisable.

OPENING/CLOSING HATCHES: Normally by ship's crew.

CUSTOMS ALLOWANCES: 40 cigarettes and 1 opened bottle wine/spirits per man.

IDENTIFICATION CARDS: Shore passes given by local police.

CONSULS:

Liberia. Tel. 975341.
Norway. Tel. 975182.

REPAIRS: No repairs permitted while alongside tanker berths. May be done in the anchorage subject permission of port authorities.

DRY DOCKS: E.B.A. Company. Floating Dock, length 105 m., breadth 17.10 m., lifting capacity 3,000 tons.

REPATRIATION: No difficulties.

AIRPORT: Nearest at Catania, can be reached in 40 minutes by car. Daily flights to Rome and Milan for international connections.

TIME: GMT plus 1 hour. Summer time, May to September, GMT plus 2 hours.

HOLIDAYS: Tankers not affected. 1st January; 6th January; 19th March; Easter Monday; 25th April; Ascension Day; Corpus Domini; 15th August; 4th November; 8th December; 25th December.

POLICE/FIRE/AMBULANCE: Police, Tel. 975555; Ambulance, 975000; Fire, 974777.

TELEPHONES: Situated at all berths. No direct connection to vessels.

SHORE LEAVE: Allowed at all times.

DEVELOPMENTS: A new pier for larger tankers will be constructed by Liquichimica at Punta Cugno. It is also planned to extend the Esso Pier No. 1.

AUTHORITY: Capitaneria di Porto.

BAGNOLI: 40.48 N. 14.10 E. (See Plan Book)

DOCUMENTS: An arrival report containing vessel's main particulars and data of certificates has to be filled in by Port Officer upon arrival.

5 Crew Lists.
5 Passenger Lists.
Store List in duplicate.
International Health Declaration.
Cargo Manifest.

PILOTAGE: Bagnoli Pilot is permanently on watch as from 0600 to 0600 hrs. Usual Pilot position is 40° 47′ 30″ N., 14° 08′ 10″ E. Pilotage is compulsory for vessels over 500 g.r.t. for anchoring or entering the port. Permanent watch is maintained by pilot station on VHF Channel 9 and/or 12. Vessel requiring Pilot may also use other international signals, such as flag, morse/sound letter "G". When in port vessels to give pilot station one hour notice for any service required. In the event of bad weather (Bagnoli area is mainly exposed to S.W. winds) vessels to shift out of piers or to change anchorage to Baia roads (sheltered natural bay three miles from Bagnoli in a Westerly direction).

ANCHORAGE: Depth of safe anchorages in Bagnoli area and in Baia roads ranging from 20 to 45 m. – sandy bottom. Anchorage is allowed in the line from the lighthouse of Nisida Island to the lighthouse of Capo Miseno.

RESTRICTIONS: Vessels can enter port at any time of day. No restriction for night departures.

MAX. SIZE: See "Berthing".

HEALTH: Free pratique can be requested via radio cabling to Health Officer of Naples. Cable address: Sanimare, Naples.

RADIO: Naples Radio.

TUGS: Presently no tug available, if required they come from Naples. Time taken approximately 2 hours.

BERTHING: *Italsider ore/coal discharging pier:* Two berths available. Pier length 357 m. Berth accommodation length 200 m. – max. draft allowed when berthing in Westerly direction is 41 ft. 6 ins. – max. draft allowed when berthing in an Easterly direction is 36 ft. with H.T. This pier is equipped with two turntable gantry cranes and conveyor belts. Ore discharging rate: 1,100 t.p.h. Coal discharging rate: 900 t.p.h. All necessary stevedoring services are performed by Italsider with their own personnel. Cranes capacity: 32 tons. Fresh water available.

Italsider loading pier: Equipped with six turntable cranes and rails – max. draft allowed on both berths is 10.5 m. Fresh water available.

Federconsorzi discharging pier: Equipped with a fixed gantry crane and aerial ropeway for discharging of phosphates and pyrites. Discharging rate per shift of 8 hours – 450 tons. Max. draft allowed is 5.40 m. Fresh water available.

Tide range: Approximately 30 cms.

STEVEDORES: Available. Rate of discharge 1,500/1,700 t.p.h.

FRESH WATER: Available from pier. Rate of delivery 20 t.p.h., or by barge. Vessels at anchor supplied with fresh water by barge from Naples.

FUEL: All types available, always delivered by barge, normally oil companies require 48 hours notice.

GANGWAY/DECK WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: Carried out by crew.

CUSTOMS ALLOWANCE: (For entire duration of stay). Tobacco, 50 cigarettes per crew member. Spirits: 1 bottle (opened) per crew member.

IDENTIFICATION CARDS: Required.

CONSULS: At Naples.

REPAIRS: Small repairs undertaken.

TIME: GMT plus 1 hour Winter. GMT plus 2 hours Summer.

HOLIDAYS: See "Naples".

POLICE/AMBULANCE/FIRE: Police 7602553; Ambulance 7520696; Fire 7330210.

SHORE LEAVE: Allowed.

GENERAL: *Launch Hire:* Vessels waiting at anchor for their turn may hire launch for crew shore leave and relevant service performed from 0700 to 2400 hrs.

The port of Bagnoli is mainly used for the discharge of ores, minerals, coal and for the loading of steel products for account of the Italsider S.p.A., metallurgic industrial group of national interest, operating with its own shore appliances. Manufacturers of chemical products, the Federconsorzi of Naples, operate in the port of Bagnoli also with their own shore appliances.

AUTHORITY: Ente Autonomo del Porto di Napoli.

BARI: 41.08 N. 16.52 E.

DOCUMENTS: On arrival:

5 Crew Lists.
3 Provision Lists.
3 Lists of Articles in possession each Crew member.
Customs Documents.
Cargo Manifests.
Bills of Lading.
Ship's Papers.

PILOTAGE: Pilot boards vessels on arrival by motor-boat near harbour entry, outer buoy. Pilotage compulsory for vessel over 500 g.r.t. inward or outward, shifting vessels from one point to another in or out of port.

Pilot call: Letter "G" of International Code, Pilot attending day and night. For services from 1700 hrs. to sunset, or from sunrise to 0800 hrs. the dues are increased.

ANCHORAGE: Good anchorage in all weathers, but precautions should be taken against winds from North. Rocky bottom covered by mud. Bad holding ground. Strong range in the port when bad weather. Not allowed to anchor in fairway except in case of emergency. Anchorage usually allowed East side of Nuovo Molo Foraneo at a distance of about 1 mile from shore.

RESTRICTIONS: Max. depth at harbour entrance 40ft., width 793 ft. Depth of water at berths from 33 ft. to 40 ft.

MAX. SIZE: Maximum permissible length 800 ft. for oil carriers proceeding to oil pier. Max. draft 39 ft.

HEALTH: Masters can request free pratique by radio by applying to "Sanimare Bari". Free pratique automatic for vessels coming direct from other Italian port, and "Q" flag not to be flown on entering. In event of any suspected disease or fever on board, Master should inform Sanimare Bari, not permitting anybody to board the vessel before doctor's inspection.

RADIO: Radio Roma, call sign "IAR."

TUGS: Tugs normally join vessel outside harbour entrance. Towage service is carried out by following tug-boats belonging to "Rimorchiatori Napoletani": *Camaldoli* of 674 I.H.P.; *Citta di Trieste* of 812 I.H.P.; *Mastino* of 1,105 I.H.P. Basic tariff is increased by 20% when the towage rope is given by tug-boat.

BERTHING: When specific side alongside berth is required by stevedores, Agents radio Master prior arrival and advise Pilot. Otherwise side alongside at Master's option after conferring with Pilot. Depth at piers 20/38 ft. dependent location. No shore fenders alongside quays.

BULK HANDLING FACILITIES: Grain discharge by 2 suction pipes at rate of 90 to 100 metric t.p.h. each.

STEVEDORES: Important to give ETA in good time. Normal working hours: Winter time (weekdays), 0800–1200 hrs., 1300–1700 hrs. Saturdays, 0800–1300 hrs. Summer time (weekdays), 0800–1200 hrs., 1400–1800 hrs. Saturdays 0630–1300 hrs.

Overtime: From 0600 to 0800 hrs. the tariff to be increased 25%; 1200 to 1300 hrs., 50%; 1700 to 2000 hrs., 25%; 2000 to 0600 hrs., 70%.

For handling pieces over 1,000 kilos, increase of 50% on the tariff. For unhealthy work, increase of 30% on the tariff.

Sunday. From 2400 to 0800 hrs. the tariff to be increased 100%; 0800 to 1200 hrs., 50%; 1400 to 1800 hrs., 50%; 1200 to 1400 hrs., 100%; 1800 to 2400 hrs., 100%.

MEDICAL: Not necessary for Agents to receive advance notice of required medical attention. Hospital facilities available.

TANKERS: Not allowed to do any degassing of tanks or any kind of repairs to vessel without Harbour Office permission.

Cleaning and degassing of tanks not allowed in port. Inspection of tankers and gas-free certificate can be obtained. Only clean ballast can be discharged in port.

Diameter of load-discharge pipe-lines at oil berth are:

20 in., 16 in. and 12 in. pipe-line for crude oil; 12 in and 18 in. pipe-line for fuel oil; 8 in. pipe-line for gasoil; 8 in. pipe-line for gasoline.

Crude oil discharged to Stanic refinery from Berths No. 31 and No. 4 (Molo Foraneo) suitable for tankers up to 39 ft. draft.

Fuel and other refined products discharged at Berth Nos. 31, 32, 33 and 34.

DENSITY: Salinity 36%.

FRESH WATER: Available at all berths served with hydrants. Good drinking water supplied by Ente Acquedotto Pugliese. No barge available to carry water in the harbour and in the roads. Tugs may be used for this purpose.

FUEL: Available, 3 days advance notice required.

GANGWAY/DECK WATCHMEN: Service of watchmen is recommended: shift of 10 hours.

OPENING/CLOSING HATCHES: Normally carried out by stevedores. Opening or closing of hatches charged for work carried out during usual working hours.

CUSTOMS ALLOWANCES: 50 cigarettes only are given to each crew member out of bond on vessel's arrival. Wine is permitted to be held out of bond but no spirits allowance permitted.

IDENTIFICATION CARDS: Shore leave pass is compulsory.

CONSULS:

Great Britain	Holland
France	Spain
Belgium	Germany
Portugal	Norway
Liberia	Turkey
Sweden	Monaco
Denmark	Ethiopia
Switzerland	Bolivia
Greece	Austria

REPAIRS: Workshops and shipyards are capable to carry out repairs to hull and engines.

DRY DOCKS: No dry docks are available at Bari. Nearest dry docks are at Taranto.

REPATRIATION: Many facilities for effecting crew changes and possibilities for arranging any necessary repatriations.

AIRPORT: Airport is located about 10 km. North of city. Served by regular airlines with flights for all countries daily.

TIME: Local time 1 hour ahead of GMT. Alterations to clocks are made from Spring to beginning of Autumn, giving 2 hours advance on GMT.

HOLIDAYS: New Year's Day (1st January); Epiphany (6th January); St. Joseph (19th March); Liberation Day (25th April); Labour Day (1st May); Easter Monday; Ascension Day; Corpus Domini; St. Nicholas (9th May); St. Nicholas, Patron of the Town (10th May); Proclamation Day (2nd June); St. Peter and St. Paul (29th June); Assumption B. V. Maria (15th August); All Saints' Day (1st November); Victory Day (4th November); Immaculate Conception (8th December); Christmas Day (25th December); Boxing Day (26th December).

Cargo work can be arranged on above days, and the stevedoring tariff increased as follows:

From 2400 to 0800 hrs., increase 100%; 0800 to 1200 hrs., 50%; 1400 to 1800 hrs., 50%; 1200 to 1400 hrs., 100%; 1800 to 2400 hrs., 100%.

POLICE/AMBULANCE/FIRE: Police, 214116; Ambulance, 246552, 341217; Fire, 212518.

TELEPHONES: No arrangements exist for placing telephone on board.

SHORE LEAVE: Allowed.

DEVELOPMENTS: Expected draft increases in the near future for berthing tankers up to 80,000 tons.

AUTHORITY: Capitaneria di Porto.

BRINDISI: 40.39 N. 17.56 E.

DOCUMENTS:

3 Crew Lists.
3 Lists of Passengers Disembarking.
3 Lists of Passengers in Transit.
Manifests of Cargo carried, with specification of port of origin and whether for local discharge or in transit. If stowed on deck or below deck.
List of Articles in possession of each Crew member, such as cameras, binoculars, portable radios, cigarettes, tobacco or any kind of cheap-priced goods.

Other Certificates required to be on board:

Certificate of Ship's tonnage.
Load Line Certificate.
Deratisation Certificate.
R/T Certificate.
Safety Certificate.
Anchorage Dues Receipt (if previously paid).

PILOTAGE: Vessel approaching port should apply for Pilot by hoisting the "G" flag, if by daytime. By night-time, letter "G" will have to be signalled by Morse, to port semaphore (Signal Station) which is located under shore lighthouse showing white flashes.

Telegraphic address of Pilot station is "Piloti Porto, Brindisi". No ETA required for Pilots as station not equipped with wireless apparatus. Characteristics of Pilot boat: gross tonnage, 9.4; power, 65 hp; speed, 8 knots.

Area where Pilot boards vessel:

In good weather: 1 mile from harbour entrance.

In bad weather: (a) If vessel is heading for inner harbour and is of small tonnage (up to 3,000 tons) Pilot boat will steer in a direct line, bows pointing towards vessel, up to entrance to "outer" harbour, where Pilot will board vessel. If vessel is of higher tonnage, she will have to take a "crosswise" position so as to form a sheltered area for Pilot, about 1 mile from harbour entrance. *(b)* If vessel (tanker) is bound for outer off-shore terminal (Montedison Installation) for discharge of crude-oil, Pilot boat will endeavour to approach vessel to communicate impossibility of immediate mooring. Anchorage roads, pending possibility for Pilot to board vessel, are 0.8 miles E.N.E. of "Punta Penne" (Capo Gallo).

ANCHORAGES: Besides anchorage point described above, there exists safe anchorages in bay for vessels having a draft of 9 m. (29 ft. 6 in.) and in external harbour for vessels of less than 3,000 tons (gross).

RESTRICTIONS: Tankers of over 1,500 tons gross may berth only from sunrise till sunset. Port berths are inaccessible in unfavourable winds. Passenger or cargo vessels no restrictions.

MAX. SIZE: *Inner Harbour:* Draft not to exceed 9.4 m. (30 ft. 10 in). *Outside Main Port area:* For discharging crude oil at offshore terminal, max. draft allowed 11.50 m. (37 ft. 8 in.). For discharging or loading of other refined products of Montedison Installations, depth of berths varies from 4 to 9 m. (from 13 ft. 1 in. to 29 ft. 6 in.).

HEALTH: Apply to "Sanimare, Brindisi" by radio, 12 hours before arrival, and not later than 4 hours before arrival, according to provisions of Health Regulations, notifying in message state of health of crew and port of origin of vessel. Procedure not required if vessel entering after calling at another port in same country.

RADIO: Vessel can communicate ETA messages to Agents through Bari Radio (nearest station) or through Rome Radio which can pick up messages from vessels at sea almost in any part of the world.

TUGS: Tug service is generally effected from Punta Riso-Faro Della Pedagne junction, up to inner harbour. It is customary to use tugs' lines for mooring and unmooring of tankers at terminals outside main port area, in view of the peculiarity of mooring operations and the area where tugs are to operate (subject to surf, choppy seas, winds). Charge for use of tugs' lines is 20% extra on normal towing rates.

TANKERS: Crude oil discharged at offshore buoy mooring for vessels up to 37 ft. 8 in. draft.

Other tanker berths at Inner Harbour for refined products, suitable for tankers up to 28 ft. draft.

STEVEDORES: Always advisable to notify in ETA messages to Agents number of hatches vessel intends working simultaneously to arrange gangs. Normal working hours: From 0700 to 1200 hrs. and 1400 to 1700 hrs. Overtime: Weekdays, 70% increase on normal tariffs. Sundays and holidays: Work performed during normal hours, 50% increase. On overtime, 100% increase.

MEDICAL: Hospital facilities available. For any kind of medical attendance or hospitalisation, if needed, it will be helpful to have port Agents advised by radio in advance.

FRESH WATER: Almost all mooring points alongside wharves are fitted with fresh water distributing hydrants. At off-shore terminals, supply is effected by tugs.

FUEL: Types of fuel available: Bunker "C", viscosity Engler at 50° (centrigrade), 16/20; specific weight, .950/960. Gasoil, viscosity Engler at 20° (centigrade), 1.4; specific weight, .830. 48 hours advance notice for any supplies required.

FIRE PRECAUTIONS: Firemen always in attendance during loading/unloading operations by oil carriers.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CERTIFICATES: For vessels over 500 tons effecting international voyages:

(a) Passenger vessels:

Safety Certificate.
Radio and Radiophone Certificates (latter if included in vessel's equipment).

(b) Freighters:

Safety Construction Certificate.
Safety Equipment Certificate.
Radio and Radiophone Certificates.

CUSTOMS ALLOWANCES: 50 cigarettes a day for each crew member, if vessel's stay in port exceeds 24 hours. No allowance if stay is shorter than 24 hours. Third of a bottle of liqueurs only.

IDENTIFICATION CARDS: Not particularly needed besides regular seaman's books.

CONSULS: Vice-Consulate of Denmark, Portugal and Holland, all having the same telephone number: 21123. Vice-Consulate of Spain: telephone: 21039.

REPAIRS: Only minor deck and engine repairs can be carried out locally.

REPATRIATION: Adequate facilities exist for effecting crew changes and repatriations as necessary.

AIRPORT: Distance from local airport 5 km. (3 miles). Airport regularly served by Alitalia Airline, ensuring 2 daily flights to Rome and 1 daily flight to other Italian cities, including, among others; Naples, Catania, Palermo, Cagliari, and other destinations via Rome. Direct international flights not scheduled from Brindisi.

TIME: Local time 1 hour ahead of GMT (generally from early June to end September), 2 hours ahead of GMT (Summer time).

HOLIDAYS: Officially recognised. Both national and religious holidays include: Sundays; New Year's Day; Epiphany (6th Jan.); St. Joseph's Name Day (19th March); Easter (Easter Monday); Anniversary of Liberation (25th April); Labour Day (1st May); Ascension, Corpus Domini (oscillating dates); Proclamation of the Italian Republic (2nd June); the Saints Peter and Paul Name Day (29th June); Assumption (15th August); All Saints' Day (1st Nov.); National Unity (4th Nov.); the Virgin Immaculate Conception (8th Dec.); Christmas, Boxing Day.

POLICE/AMBULANCE/FIRE: Police, 25555; Ambulance, 21310; Fire, 21222.

TELEPHONES: No current arrangements existing for placing telephones on board.

SHORE LEAVE: Allowed.

DEVELOPMENTS: Under construction: 1 pier in outer harbour, which is scheduled to be 200 m. in length (219 yards) with a depth of 12 m. (39 ft. 4 in.).

AUTHORITY: Comandante del Porto di Brindisi.

CAGLIARI Sardinia (including Sarroch): 39.05 N. 09.01 E. (See Plan Book)

DOCUMENTS:

6 Crew Lists.
6 Passenger Lists.
2 Provisions Manifests.
2 Manifests of crew personal effects.
Cargo Manifest.
Bills of Lading.
2 Arrival Reports, completed on arrival.
Maritime Declaration of Health, completed on arrival.
Ship's Certificates including Italian anchorage dues.
Vaccination Certificates for sighting.

PILOTAGE: Compulsory for vessels over 500 tons. Requested by ship's Agents. Vessels should wait in the roads for Pilot to board. International Code signals used for calling Pilot. Pilot station telephone number: 652929. Pilot boards tankers about 2 miles East of oil terminal.

Sarroch. Compulsory for all tankers. Vessels should wait in roads as follows:

G1 – (for tankers of more than 42 ft. draft) Lat. 39° 05′ 00″ N. Long. 09° 05′ 00″ E.
G2 – (for tankers of less than 42 ft. draft) Lat. 39° 04′ 27″ N. Long. 09° 03′ 15″ E.
G3 – (for tankers of less than 5000 g.r.t.) Lat. 39° 05′ 48″ N. Long. 09° 02′ 00″ E.

Pilot station telephone number 929006–929057. VHF Channel 16.

ANCHORAGE: All of the roads is available for anchorage except where prohibited zones indicated on charts.

MAX. SIZE: Cagliari port. Max. draft 26 ft. Sarroch, SARAS Terminal, tankers up to 170,000 d.w.t. Max. draft 58 ft.

HEALTH: Free pratique may be requested by radio to Sanimare Cagliari between 12 to 6 hours prior arrival advising vessel's name, nationality, last port, number of passengers and crew and state of health on board. Pratique is automatic for vessels coming from ports in Italy, U.K. France, Belgium, Holland, W. Germany and Greece.

RADIO: Cagliari Radio operating continuously on 2182 kHz., and on 156.8 mHz.

VHF: *Cagliari.* Harbour Master's Office, Channel 16.

Sarroch. Harbour Master's Office, Channel 16. Pilot station, Channel 16. Mooring station, Channel 6. Boat Service station, Channel 8.

TUGS: 6 available, of up to 2,000 h.p.

Cagliari. Normally join vessels at the port entrance.

Sarroch. Normally join tankers at anchorage points and assist berthing at Saras Jetties Terminal.

BERTHING: *Cagliari*

Berth No. 1: Length 68.0 m.; draft 14 ft.
Berth No. 2: Length 128.0 m.; draft 24 ft.
Berth No. 3: Length 227.0 m.; draft 21 ft.
Berth No. 4: Length 123.7 m.; draft 18 ft. 03 in.
Berth No. 5: Length 60.3 m.; draft 18 ft. 03 in.
Berth No. 6: Length 116.8 m.; draft 8 ft.
Berth No. 7: Length 92.6 m.; draft 16 ft. 06 in.
Berth No. 8: Length 278.6 m.; draft 23 ft.
Berth No. 9: Length 325.8 m.; draft 24 ft.
Berth No. 10: Length 328.0 m.; draft 26 ft. 06 in.
Berth No. 11: Length 203.2 m.; draft 26 ft. 06 in.

Berth Numbers 2, 3 and 4 reserved daily for passenger ships.

TANKERS: *Sarroch Saras Jetties*

P.1: draft 42 ft.
P.2: draft 39 ft.
P.3: draft 39 ft.
P.4: draft 36 ft.
P.5: draft 36 ft.
P.6: draft 26 ft.
P.7: draft 35 ft.
P.8: not yet workable
P.9: not yet workable
P.10: draft 23 ft.

Platform island No. 1 (for crude oil discharging only) draft 58 ft.
Platform Island No. 2 (for crude oil discharging only) draft 47 ft.

Loading rates:

Berths No. 1–4	Crude oil	5,000 t.p.h.
	Fuel oil	2,000 t.p.h.
	Gas oil	1,600 t.p.h.
	Gasoline	500 t.p.h.
Berth No. 5	Fuel oil	1,000 t.p.h.
	Gas oil	800 t.p.h.
	Gasoline	500 t.p.h.
	LPG	200 t.p.h.

Berth No. 6 For Bunkering Barges and small tankers up to 3,000 d.w.t. Fuel oil, gas oil, kerosene and gasoline at slow pumping rates.

Berth No. 7	LPG	200 t.p.h.
	Fuel oil	1,000 t.p.h.
	Gas oil	800 t.p.h.

Platform island for crude oil only at 5,000 t.p.h.

MEDICAL: All facilities available at Cagliari.

DENSITY: 1025.

FRESH WATER: Available by pipe-line at all berths. No water barges, although bunker barges may be able supply small quantity fresh water in emergency only.

At times fresh water is in short supply and may not be available.

Cost of delivery of fresh water by tug is 3,000 lire per metric ton.

FUEL: All grades available ex-wharf at tanker berths. Barges supply vessels at anchor and vessels calling for bunkers only.

Vessels calling at Sarroch for bunkers by barge are required to keep Agents closely advised of their ETA and bunker requirements. Messages confirming the vessel's ETA should be sent to Agents 72, 48 and 24 hrs. before vessel's arrival. Masters should note that customs regulations do not permit the return of bunkers to the refinery after the barge is loaded, therefore an accurate figure of bunkers required must be given in the first ETA message to Agents.

BALLAST: The discharge of ballast by tankers can be effected at all berths at a pumping rate between 1,000 and 2,500 t.p.h. Reception of ballast ashore is into 3 tanks with total capacity of 20,000 cu.m. and 6 API separator vessels.

CUSTOMS ALLOWANCES: 40 cigarettes and 1 opened bottle wine/spirits per man, usually allowed for consumption on board while vessel in port.

IDENTIFICATION CARDS: Shore passes issued by local police.

CONSULS:

Belgium
Denmark
France
Sweden
Great Britain
Netherlands
Norway

REPAIRS: Minor repairs can be handled at Cagliari. Slipway for vessels up to 400 tons.

REPATRIATION: No difficulties.

AIRPORT: Elmas Airport situated 12 km. from Cagliari.

TIME: GMT plus 1 hour. Summertime June to September: GMT plus 2 hours.

HOLIDAYS: Not applicable to tankers. New Year's Day (1st January); Epiphany (6th January); St. Joseph (19th March); Liberation Day (25th April); Labour Day (1st May); Easter and Day after Easter; Ascension Day; Corpus Domini; Proclamation Day (2nd June); St. Peter & St. Paul (29th June); Assumption B.V.Maria (15th August); All Saints' Day (1st November); Victory Day (4th November); Immaculate Conception (8th December); Christmas Day (25th December); Boxing Day (26th December).

POLICE/FIRE/AMBULANCE: *Cagliari:* Police 658956; Fire 652222; Ambulance 656979.

Sarroch: Police 929063; Fire 652222; Ambulance 929024.

TELEPHONE: No telephone connection on board.

SHORE LEAVE: Allowed.

AUTHORITY: Capitaneria di Porto di Cagliari.

CATANIA (Sicily): 37.29 N. 15.06 E. (See Plan Book)

DOCUMENTS: Arrival report requested by Harbour Authorities. Also see "Augusta".

PILOTAGE: Master can communicate with Pilot on VHF Channel 16. Pilot boards at sight on harbour entry. International Code signals used to call Pilot.

ANCHORAGE: Vessel must remain on roads awaiting Pilot.

RESTRICTIONS: No restrictions on entry at night, except for tankers (either loaded or empty, as per harbour regulation). The tide at Catania is no more than 30 cm. Bar at entrance 30 ft.

MAX. SIZE: No limitation on the length and breadth but only on draft of vessel, provided same can be contained within the size of piers of Catania Harbour. See "Berthing" below.

HEALTH: The usual sanitary pratique as per all Italian ports is requested. Free pratique obtainable by radio prior arrival sending cable to "Sanimare Catania".

RADIO: The quickest way is to address messages to "Romaradio", better if adding to the telegraphic address the telex number of Agency, so that after very short time from reception at Romaradio the message is in Agents hands.

It is important that 72 *working* hours notice of ETA be passed to Agent.

TUGS: When Pilots are on board, they can call tugs by small radio-calling station. Very frequently the tug's Company, when seeing a big ship, join vessel at same time as Pilot. Tugs using ship's lines.

BERTHING:

Berth Nos.		*Length*	*Depth*
1 and 2	Molo Mezzogiorno, Oil berths	361 m.	30 ft. 6 in.
6	Molo Crispi, Silo berth	154 m.	30 ft.
7	,, ,,	130 m.	29 ft.
8	,, ,,	140 m.	29 ft.
9	,, ,,	130 m.	20 to 28 ft.
10 and 11	Sporgente Centrale	307 m.	30 ft.
12	Molo Centrale	120 m.	30 ft.
13	Sporgente Centrale	182 m.	30 ft. 6 in.
14	,, ,,	169 m.	29 ft.
17	,, ,,	142 m.	22 ft.
18	,, ,,	142 m.	22 ft.
19	,, ,,	156 m.	18 to 21 ft.
20	,, ,,	170 m.	16 ft. 6 in.
21	,, ,,	111 m.	19 ft. 6 in.
22	,, ,,	60 m.	16 to 20 ft.

STEVEDORES: As per actual Port Labour Regulations, in order to book gangs, stowage details must reach Agency not later than 11 o'clock of the day before ship's arrival, except for work to be done on Saturdays, Sundays and Mondays when application for gangs must be made on Friday.

The official load/discharge rate for general cargo is 50 tons per hatch per day (8 hours), but real output is higher. Increase for overtime, continuous shifts (0700–1330 hrs; 1330–2000 hrs; 2000–0230 hrs.). Night work, Sundays, national holidays, etc.

MEDICAL: Hospital facilities easily available. No advance notice required unless for emergency cases and for cases to be urgently treated during night and holidays.

TANKERS: 2 tanker berths are situated in line at Southern breakwater, called "Molo Mezzogiorno". There are 3 pipe-lines, diameters of 8 in., 6 in., 4 in. No discharge facilities for tank washing.

Tankers are not allowed to berth or unberth at night.

SALINITY: Average salinity of water inside the port is the same as the average salinity of Mediterranean.

FRESH WATER: Available at nearly all quays including bunker piers.

FUEL: Bunkers available and supplied only by pipe connection at Bunker pier (Molo Mezzogiorno). Max. rate 400 t.p.h.

CUSTOMS ALLOWANCES: Tobacco, for foreign ships not in coastal service in Italian Ports: 50 cigarettes per each crew member, for the first 24 hours of the ship's stay in port. Other cigarettes can be obtained for which an application to the Customs House is required. Spirits: 2 or 3 bottles per day (provided minimum 20 crew members).

CONSULS:

Austria
Belgium
Denmark
Finland
France
Germany
Greece
Nicaragua
Norway
Netherlands
Portugal
Spain
Sweden

REPAIRS/DRY DOCK: Small repairs can be carried out at Catania. No dry docks available.

AIRPORT: Very near important airport with regular international flights.

TIME: GMT plus 1 hour. In Summer time GMT plus 2 hours.

HOLIDAYS: Normally, during all holidays it is possible to work with extra payment.

TELEPHONES: Numbers of emergency services: Police 226741; Fire Brigade 227702; Sanitary Office 226262; Harbour Master 226762.

AUTHORITY: Capitaneira di Porto.

CIVITAVECCHIA: 42.05 N. 11.47 E.

DOCUMENTS: On arrival:

4 Crew Lists.
4 Lists Passengers in Transit.
4 Lists Passengers Disembarking.
2 Provisions Lists.
2 Lists of Crew Articles, including Tobacco, Cigarettes, Spirits, Radio, etc.

Manifest(s) and Bill(s) of Lading n/n covering all cargo on board.

It is recommended that particular care be exercised in giving the exact weight and number of tobacco, cigarettes, spirits, paper for cigarettes, cigars, cigarillos, coffee, sugar, salt, pepper, spices, cocoa and chocolate, etc., on board, as well as bunker quantities and lub. oil, thus avoiding fines in case the Customs guards in searching vessel subsequently should find any concealed.

PILOTAGE: Pilots are advised of vessel's arrival by port authorities and by Agents. Therefore accurate advance notice of ETA should be addressed by Master to Agents. Pilot usually boards vessel within 2 miles of port. Pilot station in port area.

ANCHORAGES: Any vacant place assigned by port authorities, taking into account vessel's draft. If port is congested vessels anchor at roads. Pilot assistance is recommended.

RESTRICTIONS: No restrictions are imposed upon entry. With the exceptions of particular individual cases to be submitted for perusal to harbour authorities, vessels may berth and sail at any time, weather permitting.

MAX. SIZE: Max. permissible draft: 29 ft.

HEALTH: Clearance is granted by radio; Master to cable Sanimare Civitavecchia 24 hours prior to vessel's arrival. Quarantine requirements are those prevailing in all other Italian ports.

RADIO: Communications to and from vessels are sent and received from Civitavecchia Radio.

TUGS: Tugs wait for vessel at port entrance. Tug assistance is necessary although not compulsory. Ship's lines have to be used.

BERTHING: Shore fenders keep vessel off the quay. Berths:

No. 2 for vessels up to 180 m. length, 28 ft. 6 in. draft.
No. 7 for vessels up to 160 m. length, 25 ft. draft.
No. 8 for vessels up to 240 m. length, 29 ft. draft.
No. 9 for vessels up to 130 m. length, 23 ft. 6 in. draft.
No. 10 for vessels up to 220 m. length, 29 ft. draft.
No. 11 for vessels up to 220 m. length, 29 ft. draft.

Grain Silo located at berth No. 8.

SPECIALISED CARGO HANDLING FACILITIES: Berth No. 8: grain silo of 35/40,000 tons capacity is available; this berth is equipped with 2 rail-suckers, 4 movable suckers and 1 elevator. Ore, coal, fertilisers, sulphur, etc. can be handled at quays No. 2/7/9/10 and 11. Structures for containers not available here, nevertheless small traffic might be practicable. Roll-on/roll-off traffic practicable. Liquid chemicals practicable. No facilities exist for LPG carriers.

STEVEDORES: To enable Agent to order gangs it is very important to obtain accurate ETA in good time.

From 0800 to 1200 hrs. and from 1300 to 1700 hrs., or from 0600 to 1230 hrs., from 1230 to 1900 hrs. and from 1900 to 0030 hrs. against payment of 32.50% extra.

Saturday: From 0600 to 1230 hrs. against payment of 32.50% extra; from 1230 to 1900 hrs. and from 1900 to 0030 hrs. against payment of a further increase of 25%.

Sunday: Work can be performed at overtime rates plus 50% extra from 0600 to 1230 hrs., from 1230 to 1900 hrs. and from 1900 to 0030 hrs.

Holidays: Work can be performed at overtime rates plus 150% extra from 0600 to 1230 hrs., from 1230 to 1900 hrs. and from 1900 to 0030 hrs.

MEDICAL: Not necessary to receive advance note of required medical attention. Hospital and clinical surgery available. Master to advise in advance of particular inoculations required.

TANKERS: Max. draft allowed 28 ft. 6 in. Max. length 180 m. Tankers are not permitted to enter port before sunrise and after sunset. Diameter of discharge lines 8–10 in.

FRESH WATER: Drinking water and water for boilers is supplied from pier by hoses. Average pumping rate 8–10 t.p.h.

FUEL: Bunkering can be effected by means of barges and/or tank-lorries at all quays. Grades available: fuel oil and gas oil.

GANGWAY/DECK WATCHMEN: Watchmen services recommended.

OPENING/CLOSING HATCHES: First opening and last closing normally carried out by crew.

CERTIFICATES: Requirements are those prevailing in all other Italian ports, e.g. Tonnage Certificate, Safety Equipment, Load Line, Deratting Certificate, etc.

CUSTOMS ALLOWANCES: Tobacco. Quantity permitted to each crew member: 50 grams to be smoked within first 48 hours. Wine and/or Spirits. 1 open bottle of spirits.

IDENTIFICATION CARDS: Required. Passes issued by local police.

CONSULS: There are no Consulates, but only Consular Agencies or Honorary Representatives for the following countries:

France	Tel. 23044	Spain	Tel. 24304
Sweden	Tel. 23109	Norway	Tel. 25207
Finland	Tel. 23134	Portugal	Tel. 23048

Nearest British Consulate is in Rome.

REPAIRS: Repairs of limited extent and importance may be carried out by 2 local workshops.

REPATRIATION: Facilities exist to effect crew changes and to arrange repatriations.

AIRPORT: Distance from Airport Leonardo da Vinci (Rome) 70 km.

TIME: 1 hour in advance in relation to GMT. Clock will be advanced 1 hour in Summertime, giving 2 hours advance of GMT.

HOLIDAYS: All Sundays, 1st and 6th January, 19th March, 25th and 28th April, 1st May, 2nd and 29th June, 15th August, 1st and 4th November, 8th, 25th and 26th December, Easter Monday, Ascension Day, Corpus Domini. Holiday work is subject to the authorisation of port authorities.

POLICE/AMBULANCE/FIRE: Police, 23729; Ambulance, 23382; Fire, 23333.

TELEPHONES: Can be connected on board vessels at quays No. 7 and 10.

DEVELOPMENTS: Availability of quay No. 0 dredging to 30 ft., length 180 m., equipped with 2 cranes of maximum lifting capacity of 35 tons each. Extension of outer breakwater and deepening of the basin.

The port is being developed to receive tankers up to 80,000 d.w.t.

AUTHORITY: Capitaneria di Porto.

FIUMICINO: 41.46 N. 12.13 E. (See Plan Book)

DOCUMENTS:

3 copies of Crew List.
Store Manifest.
List of Personal Effects.
Manifest of Cargo.

PILOTAGE: Vessel should await Pilot about 0.5 mile off the tanker loading platforms which are situated in the following positions:

Platform R1: Lat. 41° 45′ 06.64″ N. Long. 12° 09′ 15.73″ E.
Platform R2: Lat. 41° 44′ 37.44″ N. Long. 12° 10′ 04.79″ E.

ANCHORAGE: Vessels waiting to berth should anchor to the South of Platform R2, not less than 1 mile from the platform. The anchorage is not recommended during strong South or South-westerly winds, and in unfavourable weather conditions it is advisable for vessels to remain underway.

It is forbidden to use anchors in the near vicinity of the tanker berths, due to the presence of underwater pipe-lines. When approaching the moorings, anchors must be firmly secured in the hawse.

RESTRICTIONS: Pilotage and mooring is not carried out during hours of darkness. Unmooring possible day and night.

MAX. SIZE: Ships of any length can be moored.

At R1 platform, water depth 23 m., max. draft 54 ft.
At R2 platform, water depth 19.50 m., max. draft 46 ft.

From time to time it may be possible to allow greater drafts subject to Pilot's advice.

HEALTH: Sanitary pratique can be granted by radio cabling "Sanimare Fiumicino", 36 hours (48 hours in case of arrival a day after holiday) before arrival stating: last port, number of crew and good health of same, ship's flag – using international code.

RADIO: Advise Refinery of vessel's ETA 72 hours before arrival via Roma Radio. Confirm ETA 24 hours before arrival.

Vessels arriving for the first time at Fiumicino should also advise dimensions of vessel's manifold flange connections, as follows: distance from bow, distance from ship's side, height above deck, outside diameter, inside diameter, number of holes, distance between centre of opposite holes and diameter of holes.

Vessels should also communicate draft, cargo temperature, lifting power of derrick, voltage and type of current on board (AC/DC) and vessels loading should also advise quantity of ballast on board.

During cargo operations, the tanker will communicate by radio-telephone with the pumping station and the refinery.

VHF: Pilot station on VHF Channel 6. Listens during daylight hours only.

TUGS: Not required for mooring.

MEDICAL: Local doctor and hospitals available in Rome.

TANKERS: 2 offshore mooring platforms, R1 and R2, connected to sea-lines of 20 in., 28 in. and 36 in. diameters. Loading rates 600 to 1,200 cu.m. per hour. Rate of discharge 2,500 to 4,000 cu.m. per hour.

Mooring: Vessel to have ready on arrival: port derrick rigged for hose handling; boat-rope, pilot ladder, heaving lines and lifebuoys on both sides; 3 good mooring lines at the bow, each not less than 150 m. length.

Vessel is moored by the bow about 30 to 50 m. distant from the mooring platform. All ship's ropes are led back and secured on board to facilitate unmooring.

Hoses: Connecting and disconnecting hoses performed by refinery personnel, vessel to supply winchman and man the derrick. Derrick capacity to be at least 3 tons. Each platform is equipped with 2 floating hoses, about 200 m. long, which drift fully extended when berth is not occupied.

BALLAST: Raffineria di Roma can accept dirty ballast or tank washings up to a maximum of 15,000 tons. Recommended advise before arrival the quantity of ballast to be discharged. Ballast should be reduced to a safe minimum to save time at the mooring berth.

SALINITY: 25-28 grams per litre.

FRESH WATER: Supply by barge 100 tons per trip.

FUEL: Bunkers not available, only lubeoil in drums can be supplied.

CUSTOMS ALLOWANCES: 40 cigarettes per day for 3 days for each Crew member.

CONSULS: All Consulates and Embassies in Rome.

REPAIRS: Small repairs can be effected but no dry dock.

AIRPORT: International airport "Leonardo da Vinci" at Fiumicino.

TIME: GMT plus 1 hour.

REGULATIONS: Raffineria di Roma will hold vessel responsible for consequences of any pollution caused by oil leaking or discharged from the ship. Strictest precautions to be observed.

Engine to be kept ready to leave the berth in the shortest possible time.

Propeller movements are forbidden while vessel in berth, due to presence of floating pipe-lines.

WINDS: In the Fiumicino roads the strongest winds come from S.W., but all winds coming from S.E. to N.W. can cause such storms that can be dangerous both for moored ships and anchored ships.

Northern winds, being partially weakened by the coast, are dangerous only when exceptionally strong.

Usually storms begin with S.E. winds, which then turn South-westerly reaching their maximum force; then they usually turn Northerly or North-westerly, finally weakening; this cycle can endure from 3 days up to more than a week. However the above cycle does not always develop in this way, since the peculiar characteristic of this zone is the rapidity by which wind can change both in force and direction, as well as the sea possibility of becoming rough in a very short time. The stream almost always goes from S.E. towards N.W. at the speed of 0.5 to 1 knot. Owing to the Tiber's mouth, the stream can exceptionally increase in intensity, but due to the distance between terminals and shore, we have never had up to now any example of intensity increased to such a point as to be dangerous for mooring and anchoring ships. Tides are practically negligible; in fact the maximum difference between high and low tide is about 0.40 m.

GENERAL: The refinery personnel will set up floodlights on deck but power is to be provided by the vessel as is assistance in the setting up.

A refinery representative will remain on the vessel to supervise cargo inspection, loading/unloading and surveillance. He is to be provided with accommodation and meals.

A room is to be provided for the radio connecting vessel with the refinery.

A Raffineria di Roma S.p.A. representative will, upon boarding the vessel, require a letter, stating:

(a) the minimum discharge rate of crude oil, products or ballast or the maximum loading rate;
(b) the maximum back pressure to be maintained at ship's manifold;
(c) amount of cargo requested for loading vessel.

TERMINAL OPERATOR: Raffineria di Roma S.p.A.

AUTHORITY: Il Comandante del Porto.

GAETA: 41.13 N. 13.35 E. (See Plan Book)

PORT LIMITS: Although not reported on nautical charts, port limits may be considered as the seaward boundaries of the compulsory pilotage area.

DOCUMENTS:

6 copies Crew List
6 copies Passenger List
6 copies Cargo Manifest
3 copies Provisions Manifest (store list)
3 copies List of Crew Personal Effects
2 copies Arrival Report (on form submitted by Agents)
2 copies Maritime Health Declaration
Vaccination Certificates for sighting
Ship's Certificates including Italian Authority dues.

PILOTAGE: Compulsory for entering roads, docking and undocking. Seaward boundaries of compulsory pilotage area within 2 miles from Punta Stendardo, up to a line joining Punta Stendardo with Torre Scauri (line bearing about 65° from Punta Stendardo). Pilots meet vessel about 2 miles from Punta Stendardo and can be contacted by VHF (calling Channel 16, working Channel 12) 1 hour before vessel's arrival.

Advance notice to Pilots given by vessels Agent.

ANCHORAGES: Safe anchorage can be found outside the compulsory pilotage area or, according to Pilot's instructions, inside above said area.

RESTRICTIONS: No restrictions outside the compulsory pilotage area. Inside above area vessels to keep clear from prohibited anchorage areas, sea berth facilities and mooring buoys, mooring buoys for military vessels, oil jetty facilities and mussel beds.

Also see "Berthing".

MAX. SIZE: Inside compulsory pilotage area, max. permissible length, breadth, draft, within values of 200,000 d.w.t. class VLCC.

Also see "Berthing".

HEALTH: Pratique automatic for vessels coming from ports in Italy, U.K., France, Belgium, Holland, W. Germany, Greece and Spain.

Otherwise free pratique granted by local Health Officer who boards ships on arrival together with harbour officers, between 0700 hrs. and sunset. In order to facilitate boarding by officers at anchorage or berths, it is requested that vessels have a convenient accommodation ladder/gangway ready.

RADIO: 72, 48 and 24 hours definite notice to Agent through Roma Radio (IAR).

VHF: Port Authority, Pilots, Tugs, Oil sea berth, Oil jetty and Agency offices equipped with VHF; calling Channel 16.

TUGS: Tugs standing just inside Punta Stendardo, being called for service by the boarding Pilot. Ship's lines used.

Tug-boat assistance compulsory, for vessel over 1,600 g.r.t., for docking and undocking; stand-by tug compulsory, for vessel loading or discharging at oil jetty (but not at oil sea berth), from connection to disconnection of cargo hoses.

BERTHING: Oil sea berth for VLCC's discharging crude oil, Oil jetty for tankers discharging/loading crude oil and oil products, Dry cargo main quay "Caboto", Dry cargo pier "Genepesca", Dry cargo quay under construction expected to be operative about September 1978. Docking/undocking normally performed in daytime only with possible exceptions.

VLCC sea berth: owned by Messrs. S.I.O.G. (Societa' Italiana Oleodotti Gaeta) for class VLCC 200,000 d.w.t. discharging crude oil. Restrictions for vessels within above d.w.t. class not yet officially issued. Max. values of d.w.t., length, draft of vessels already called:

—Max. d.w.t.: 260,000 (VLCC Athene)
—Max. length: 349 m. (VLCC Agip Lazio)
—Max. draft: 20.30 m. (VLCC Agip Lazio)

S.I.O.G. sea berth consisting of 2 submerged mooring blocks and 5 mooring buoys fitted with mooring wires 44 mm. diameter and messenger wires 20 mm. diameter.

The S.I.O.G. sea berth submerged manifold (approximate position 41° 13′ 27″ N., 12° 36′ 23″ E.) is marked by a beacon-buoy with flashing red light. Two buoys are located to the W.S.W. of the mooring berth to indicate the berthing line (about 077°).

The pipe-line to the shore is 42 in. diameter, and about 3,150 m. length. Two partially floating cargo hoses 16 in. diameter having steel flanges 16 in. diameter, ASA 150, connected to the submerged cargo manifold, to be lifted on vessel's portside by ship's hose derrick required to have S.W.L. 10 tons.

One or 2 extra tugs (in addition to the 3 existing in the port of Gaeta) may be needed for berthing larger size vessels at the sea berth, said extra tugs to come from Naples with adequate advance notice.

G.I.P. Oil Jetty: Owned by Messrs G.I.P. (Gaeta Industrie Petroli) for tankers discharging/loading crude oil and oil products.

Restrictions:

Maximum permissible draft	48 feet
Maximum permissible distance between cargo manifolds and vessel's stern	450 feet
Maximum permissible height of above vessel's cargo manifold from sea level	49 feet

Tankers up to 60,000 d.w.t. normally berth and operate at G.I.P. oil jetty; tankers over 60,000 d.w.t. and up to 90,000 d.w.t. may be berthed at oil jetty or at sea berth according G.I.P. advice; tankers over 90,000 d.w.t. will find berth at sea berth.

G.I.P. oil jetty is a finger jetty with 3 berths: North berth with restrictions as above; South berth for vessels up to 39 feet draft; stern berth for small coastwise vessels.

North and South berths equipped with 4 articulated 8 in. steel pipe connections.

Dry cargo quay "Caboto": 106 m. long quay with max. offical draft limitation of 20 ft.; vessels up to 130 m. length, drafts up to 20 ft. fwd and 22 ft. aft, are normally accommodated.

Dry cargo pier "Genepesca": 50 m. long pier with 1 berth each side for vessels up to 15 ft. draft.

Dry cargo handling: Cargo normally handled – general cargo, clay, kaolin, fertilisers, animal-feed, frozen commodities, klinker, cement, steel rounds, steel coils, aluminium ingots, etc.

CRANES: 4 mobile dock cranes available, each having max. lifting capacity 30 tons (normal working capacity 15 tons).

STEVEDORES: Compagnia Lavoratori Portuali 'G. Caboto'. Gangs ordered by Agents dealing with cargo.

BALLAST: At all berths only clean ballast can be pumped out. G.I.P. oil jetty equipped with system for discharging ballast ashore through 8 in. connections and a 1600 m. long 10 in. pipe-line at a rate of about 400 – 450 t.p.h.

FRESH WATER: Of excellent quality supplied to ships at all berths but not at sea berth. At sea berth or at road, fresh water can be supplied by tug-boat but expensive.

FUEL: Supplies of Bunker "C" and Gasoil can be arranged ex-installation at G.I.P. oil jetty; a minimum quantity of 200 tons is required for fuel and 100 tons for Gasoil. At dry cargo berths bunkers can only be arranged by road tanker. Bunkers not available for vessels accommodated at sea berth.

REPAIRS: Minor steel and machinery repairs currently performed by local machine shops; major repairs may be effected by personnel and equipment from Naples.

DRY DOCKS: 2 dry docks for vessels up to about 70 m. length.

SURVEYORS: Lloyds, A.B.S. and other Classifications Societies Surveyors obtainable from Naples.

MEDICAL: Physician, Dentist, Eye and other Specialists available. Hospital and Nursing Home in Formia (7 km. from Gaeta); new hospital being built in Gaeta, expected to be operative in the near future. Inoculation service available. Vaccination Certificates issued. Extension of Deratisation Certificates granted.

CUSTOMS ALLOWANCES: 40 cigarettes and one opened wine/spirit bottle per man.

IDENTIFICATION CARDS: Shore passes issued by local police.

REPATRIATION: Facilities available for effecting crew changes and arranging repatriation.

AIRPORT: Nearest airports Naples (96 km.) and Rome (International airport 135 km.).

TIME: GMT + 1 hour October to April; GMT + 2 hours May to September.

POLICE/AMBULANCE/FIRE: Police station telephone numbers: 113 (emergency); 460031; 460474. Ambulances telephone numbers: 24361; 24461. Fire department telephone number: 460270; 460931.

TELEPHONES: Arrangements for placing telephone aboard vessels not available.

DEVELOPMENTS: New dry cargo wharf under construction, expected to be operative September/October 1978, depth of water 10 m.

AUTHORITY: Capitaneria di Porto, Gaeta.

AGENT: Italnoli, Lungomare Caboto, Palazzo Albani 3, 04024 – Gaeta, Italy. Cable Address: "Italnoli – Gaeta". Telex: 68050 Italgaet. Tel. 460572, 460915. *After Hours:* 460087, 460859.

GELA: 37.04 N. 14.15 E.

DOCUMENTS:

For Maritime Authority:
- Arrival Report.
- Crew List.
- Passenger List.
- Ship's Certificates, for sighting.

For Port Health:
- Maritime Declaration of Health (2 copies).
- Vaccination Certificates, for sighting.

For Customs:
- List of supplies and engine stores.
- Cargo Manifest enclosing Bills of Lading.

For Police:
- Passenger List (2 copies).
- Crew List (2 copies).
- Shore Passes for all Passengers and Crew.

PILOTAGE: Pilots are requested by International Code signals. (Flag or whistle acoustic signal, 2 long and 1 short blast). Telegraphic address: Piloti del Porto Gela. ETA required at least 2 hours before arrival. No VHF.

The pilot boat has black hull, white cabin with letter "P" painted in black on both sides. The pilot boat stationed near port island, Pilot boards about 1 mile off the port.

ANCHORAGE: Anchorage for vessels waiting Pilot about 1 mile West of the head of the Western breakwater, South of the 10 m. depth line. Small vessels may anchor to the West or East of the pier not less than 0.2 miles from the pier and in such a position as not to obstruct vessels berthing or leaving from the dock or the pier.

RESTRICTIONS: Entry only between sunrise and sunset.

MAX. SIZE: Dry Cargo vessels: 180 m. length, 30 ft. 6 in. draft. Tankers berthing at the Mole: 250 m. length 31 ft. draft. Sea Line Tanker terminal: 250 m. length, 44 ft. draft. Up to about 60,000 d.w.t.

HEALTH: No radio pratique. Free pratique can be given on board on request.

RADIO: Roma Radio, or Augusta Radio. Messages are forwarded quicker through Roma Radio.

TUGS: 1 stationed to West or East of the pier, depending on weather and tide. Use of tug lines is optional.

BERTHING: The Anic Pier has berths on both sides in depths of 30 to 31 ft. Jetty is 2,800 m. length, and is protected by a breakwater. 2 berths suitable for dry-cargo vessels of up to 10,000 d.w.t. are available at the jetty terminal platform.

At the Breakwater there are 2 berths suitable for tankers up to about 34,000 d.w.t., plus 4 other berths for smaller vessels. See "Tankers".

TANKERS: Anic Sea Line Terminal: situated about 1 mile off the breakwater, a crude oil discharge berth in depth of 15 m. served by 34-in. sea-line terminating in two 12-in. flexible hoses. No slop discharge facilities. At the breakwater, Berth Nos. 1 to 6 for loading refined products and LPG can accommodate vessels up to 34,000 tons with max. draft 31 ft. These berths are also used for discharging crude oil and naphtha.

Storage tanks situated up to about 15 m. above sea level.

STEVEDORES: Should be ordered 12 hours in advance. Ship's gear used in dry-cargo operations although 5-ton mobile cranes are available. 2 shore cranes are available fitted with grabs for discharge of bulk sulphur and phosphates.

MEDICAL: All assistance can be arranged at 2 hours notice to Agents. Hospital and private clinic available. Vaccinations and inoculations with relative certificates can be arranged.

DENSITY: 1024.

FRESH WATER: Available at all berths. Not available at Sea-Line Terminal.

FUEL: Usually available without notice. Bunker oil is only supplied at breakwater berths.

OPENING/CLOSING HATCHES: Optional to employ shore personnel.

CUSTOMS ALLOWANCES: As for other Italian Ports.

IDENTIFICATION CARDS: Required.

CONSULS: No local representation.

REPAIRS: Only minor repairs possible.

AIRPORT: Catania, 104 km. away, 8 flights a day to Rome.

TIME: GMT plus 1 hour. Summertime: GMT plus 2 hours.

HOLIDAYS: New Year's Day (1st January); Epiphany (6th January); St. Joseph (19th March); Liberation Day (25th April); Labour Day (1st May); Easter Monday Ascension Day; Corpus Domini; Proclamation Day (2nd June); St. Peter and St. Paul (29th June); Assumption B.V. Maria (15th August); Patron Saint (8th September); All Saints' Day (1st November); Victory Day (4th November); Immaculate Conception (8th December); Christmas Day (25th December); Boxing Day (26th December).

POLICE/AMBULANCE/FIRE: Police, tel. 30091; Ambulance, 37058; Fire, 30222.

SHORE LEAVE: Allowed.

DEVELOPMENTS: 2 additional berths at the new pier situated to the West of the Anic pier, suitable for vessels of up to about 7.31 m. (24 ft.) draft and used for loading ammonia and discharge of sulphuric acid.

AUTHORITY: Ufficia Locale Maritimo.

GENOA: 44.24 N. 08.54 E. (See Plan Book)

DOCUMENTS:
- 6 Crew Lists.
- 6 Passenger Lists.
- Provisions Manifest.
- Manifest of Crew Personal Effects.
- 3 Cargo Manifests.
- Arrival Report, completed on arrival.
- Maritime Declaration of Health Certificate, completed on arrival.
- Ship's Certificates including Italian Authority Dues.
- Vaccination Certificates for sighting.

PILOTAGE: Pilots advised of vessel's arrival by port authority and the latter by vessel's Agent. Therefore accurate ETA recommended. Pilotage compulsory for vessels over 500 g.r.t. To contact Pilots and pilot boats, VHF Channel 12. Time of working 24 hours. Pilots board vessel at about 1 mile off port entrance.

ANCHORAGES: In case of port congestion or awaiting Pilot, vessel may anchor outside port entrance, East of the fairway.

Shipmaster's Report: Port Control advised that from 1st June – 3rd September vessels should anchor to the West of the breakwater in 30 fathoms or more as anchorages to the East of the breakwater are considered unsafe during this period.

RESTRICTIONS: Tankers not usually berthed during night-time.

MAX. SIZE: Tankers: up to 46 ft. draft within port, and 500,000 d.w.t. at tower outside the port. Other vessels: 31 to 40 ft. draft. Also see "Tankers" and "Berthing".

HEALTH: Free pratique may be requested by radio to Sanimare, Genoa, between 12 to 6 hours before arrival, advising vessel's name, nationality, last port, number of passengers and crew and state of health on board. Pratique is automatic for vessels coming from ports in Italy, U.K., France, Belgium, Holland, W. Germany and Greece.

RADIO: Genoa Radio, call sign ICB. Agent uses same station when cabling to vessels.

TUGS: Tugs join vessel at port entrance. Ship's line used. 36 tugs available.

BERTHING: Pilot advises Master which side to berth. Shore fenders keep vessel off quay.

Mo Vecchio: 452 m. berthing length; 29–31 ft. permitted draft.

Silos Ponte Parodi: 200 m. berthing length; 36 ft. permitted draft.

Silos S. Limbania: 150 m. berthing length on both sides of the pier; permitted draft: 33 ft. East side, 36 ft. West side.

Ponte dei Mille: East side: 292 m. berthing length; 27–28 ft. permitted draft West side: 265 m. berthing length; 26–27 ft. permitted draft.

Ponte Andrea Doria: East side: 238 m. berthing length; 36 ft. permitted draft. West side: 233 m. berthing length; 36 ft. permitted draft.

Calata Oli Minerali: 474 m. berthing length (bow mooring); 24–36 ft. permitted draft.

Calata Stefano Canzio: 422 m. berthing length (bow mooring); 31–33 ft. permitted draft.

Calata Bettolo: 434 m. berthing length; 30 ft. permitted draft.

Ponte Rubattino: East side: 328 m. berthing length; 34 ft. 6 in. permitted draft. West side: 340 m. berthing length; 27–29 ft. permitted draft.

Ponte S. Giorgio: East side: 390 m. (will soon be in operation); 32 ft. permitted draft (will be 37 ft. 6 in.). West side: 264 m. berthing length; 30 ft. 6 in. permitted draft.

Ponte Ex Idroscalo: East side: 190 m. berthing length; 29 ft. permitted draft. Head: 190 m. berthing length; 35 ft. permitted draft. West side: 260 m. berthing length; 28–32 ft. permitted draft.

Ponte Ethiopia: East side: 255 m. berthing length; 32–33 ft. permitted draft. Head: 146 m. berthing length; 32 ft. permitted draft. West side: 399 m.berthing length; 29–31 ft. permitted draft.

Ponte Eritrea: East side: 388 m. berthing length; 29–31 ft. permitted draft. Head: 145 m. berthing length; 31 ft. permitted draft. West side: 398 m. berthing length; 29–31 ft. permitted draft.

Ponte Somalia: East side: 390 m. berthing length; 30–32 ft. permitted draft. Head: 165 m. berthing length; 34 ft. permitted draft. West side: 401 m. berthing length; 29–34 ft. permitted draft.

Ponte Libia (No. 1 Container Terminal) East side: 401 m. berthing length; 29–31 ft. permitted draft. Head: 167 m. berthing length; 34 ft. permitted draft. West side: 399 m. berthing length; 34–35 ft. permitted draft.

Ponte Canepa: West side: 397 m. berthing length; 27–30 ft. permitted draft.

Ponte Nino Ronco (No. 2 Container Terminal): East side: 400 m. berthing length; 38 ft. permitted draft.

Banchina Italsider: 500 m. berthing length; 40–44 ft. permitted draft.

CRANES: Over 300 cranes and elevators with lifting capacities ranging from 1 to 45 tons. Over 80 self-propelling cranes with lifting capacities ranging from 4 to 45 tons. 26 floating cranes with lifting capacities of up to 350 tons.

CONTAINER HANDLING FACILITIES: Ponte Libia: Depth alongside: 34–35 ft.; length of quay: 399 m. along Western side of the pier served by 2 portainers, and 167 m. on the Southern side not served by the portainers.

Fixed Equipment: 1 "Paceco-Vickers-Savigliano" crane having a maximum lifting capacity of 40 tons and the following main characteristics:

Gauge of crane gantry 27 m. (88 ft. 6 in.).

Maximum height of structures above wharf level 31 m. (101 ft. 7 in.).

Total length of travelling bridge 69 m. (226 ft. 4 in.).

Maximum seaward outreach 28.8 m. (94 ft. 3 in.).

Useful travel of spreader with bridge partially drawn back for crane working on the quayside 23.3 m. (76 ft. 4 in.).

Maximum height of spreader above wharf level 20.5 m. (67 ft. 2 in.).

Crane suitable to unload containers by 20 ft., 30 ft., 35 ft., 40 ft., spreaders; other cargoes by hook (capacity 40 tons); bulk material by bucket (capacity 15 tons).

1 "C.M.I." portainer having a maximum lifting capacity of 42 tons (50 tons by hook) and the following main characteristics:

Gauge of crane gantry 27 m. (88 ft. 6 in.).

Maximum seaward outreach 36 m.

Maximum height of structures above wharf level 20 m.

Useful travel of spreader with bridge partially drawn back for crane working on the quayside; 27 m.

Crane suitable to load/unload containers by 20 ft., 30 ft., 35 ft., 40 ft.; other cargoes by hook (capacity 50 tons).

1 Transtainer (gantry crane) having a maximum lifting capacity of 40 tons and a total rail length of 190 m.

Another Transtainer will be installed in the near future.

Stockyards with a total area of 70,000 sq.m.

Shed with loading platform and steel supporting frame 100 m. (328 ft.) long, 25 m. (82 ft.) wide and a total area of 2,500 sq.m. (26,910 sq.ft.).

Ponte Nino Ronco: Depth alongside: 38 ft. Length of quay along Eastern side of the pier where 2 container ships can operate simultaneously: 400 m.

Fixed Equipment: 2 "Paceco-Vickers-Reggiane" cranes having a maximum lifting capacity of 45 tons and the following main characteristics:

Gauge of crane gantry 27 m. (88 ft. 6 in.).

Maximum height of structure above wharf level 31 m. (101 ft. 7 in.).

Total length of travelling bridge 74.85 m. (245 ft. 6 in.).

Maximum seaward outreach 35 m. (114 ft. 8 in.).

Useful travel of spreader with bridge partially drawn back for crane working on quayside 28 m. (92 ft.).

Maximum height of spreader above wharf level 20.5 m. (67 ft. 2 in.).

Crane suitable to unload 20 ft., 30 ft., 35 ft., 40 ft., container using telescopic spreader; other cargoes by hook (capacity 45 tons); bulk materials by bucket (capacity 15 tons).

Independent in-and-out 6-lane customs checkpoint, with weighing plants, rail and road sidings to the Sampierdarena base network and to Lungomare Canepa respectively.

Check-point buildings covering total surface area of 875 sq.m. (9,418 sq.ft.) and of 9,620 cu.m. (339,728 cu.ft.) in volume, divided as follows:

Building No. 1 to accommodate Police, Customs guard, Italian State Railways, the heating plant and other services.

Building No. 2 to accommodate Port Authority, Customs and commercial offices which can be enlarged by 3,000 additional cu.m. (105,944 cu.ft.).

1 metallic shed with loading platform for both railway cars and lorries, for consolidation (groupage) operations, having an area of 1,400 sq.m. (15,070 sq.ft.).

Special paving which allows stacking of containers up to 5 high.

The Ronco Pier has the possibility of internal direct communications with Sampierdarena docks through the Calata Derna (Derna quay), the possibility of direct connection with the harbour elevated road through ramps at the end of the pier and the possibility of doubling the berthing places along the Western side of the pier.

Stockyard for a total area of 80,000 sq.m. (35,000 sq.m. enlargement will be completed in 1979).

Mobile Equipment (for both container terminals):

The two terminals are equipped with:

15 straddle carriers

1 side loader

10 big fork trucks (lifting capacity 10 tons)

70 trucks and tractors

70 trailers and flat cars (others available when necessary)

30 fork trucks (lifting capacity 2–3 tons) for stuffing and stripping (others available when necessary).

SPECIALISED CARGO HANDLING FACILITIES: See "Berthing" for max. draft.

Ro/Ro Terminals: 20 special berths at Ponte Calvi, Ponte A. Doria, Calata S. Lazzarino, Ponte Colombo, Ponte Assereto, Calata San Benigno, Calata Bettolo, Calata Bengasi, Calata Tripoli, Ponte Canepa and Calata Derna, 45,000 sq.m. parking areas.

Cotton: 2 warehouses at Molo Vecchio, totalling 42,000 sq.m. in area and a 85,000 bale capacity.

Grain Silos: There are 2: One at Santa Limbania (65,000 ton storage capacity – 600 t.p.h. unloading capacity). One at Ponte Parodi (45,000 ton storage capacity – 450 t.p.h. unloading capacity).

Maritime Passenger Stations: One at Ponte dei Mille and another one at Ponte Andrea Doria, capable of dealing with 5,000 passengers a day.

Three stations for Ro/Ro passengers at Ponte Calvi, Ponte Colombo and Calata Chiappella.

Animal Fats and Oils Depots: Plants at Ponte Assereto, Calata Sanita and Ponte Etiopia.

144 tanks having a total capacity of up to 53,000 tons.

14 barges with a total capacity of up to 12,000 tons.

Timber Terminal: 2 berths at Ponte ex Idroscalo, 50,000 sq.m. area yard.

Coffee: A special warehouse is available at Ponte Etiopia, covering 4,400 sq.m. (this area will soon be doubled). 25,000 sacks can be stored there.

Cellulose Terminals: 2 special berths at Ponte Eritrea and Ponte Somalia. 12,000 sq.m. of covered area.

Export-cargo Clearing Centre: Warehouse of 15,000 sq.m. equipped for the handling of 1,000 tons a day of parcels.

Wool: A special warehouse at Ponte Libia covering a 17,000 sq.m. area. 40,000 bale capacity.

Other Special Plants: Warehouses, depots, and special facilities for wine, salt, skins, bananas, coal.

TANKERS: Berths in Genoa Harbour suitable for tankers up to 750 ft. length, 34 ft. draft. Tankers discharging at Calata Sanita and Calata Olii Minerali are berthed stern to quay.

Multedo Harbour situated West of main harbour has the following jetties:

Multedo Pier – for vessels up to 588 ft. length, 31 ft. draft.
Pier "A" – for vessels up to 580 ft. length, 36 ft. draft.
Pier "B" – for vessels up to 850 ft. length, 43 ft. draft.
Pier "C" – for vessels up to 850 ft. length, 46 ft. draft.
Pier "D" – Presently accommodating tankers up to 46 ft. draft.

Discharge Rate: Maximum discharge rate for crude products:

Pier "A"	2,500/3,500 t.p.h.
Pier "B"	3,500/6,000 t.p.h.
Pier "C"	6,000/10,000 t.p.h.
Pier "D"	6,000/10,000 t.p.h.

Masters may speak direct to Pilots or Harbour Masters at Multedo Oil Berth in order to obtain latest information about berthing, etc., by calling on VHF Channel 6.

Buoy Terminal: A steel tower, set up about 2,800 m. off the Genoa Multedo Oil Dock in water 50 m. in depth is provided for the discharge of crude oil from supertankers up to 500,000 d.w.t. Unloading capacity 14,000 cu.m./h.

A 48 in. (120 cm.) submarine pipe-line connects the tower with the terminals of all the oil companies operating at the Multedo Oil Dock.

Technical Characteristics: The tower consists of a steel structure having the form of a truncated pyramid set into the sea-bed at a depth of 50 m. and supporting the following parts above the level of the sea:

A lower platform having quarters for the accommodation of personnel or the housing of the various services, the deck being at a height of 6.335 m. a.s.l. This platform is protected by a steel structure mounted on elastic supports, with wooden fenders topped with rubber buffers. The toroidal structure, externally to the rubber buffers, is 34.200 m. in diameter. Under the impact of a vessel, the ring will shift axially for a distance of 2 m. as a result of the system of shock absorbers which support the lower platform.

An upper platform 10.335 m. a.s.l. which carries the rotating arm for berthing tankers and the connection of the floating discharge hoses. The rotating arm reaches a height of 13.882 m. a.s.l. and is fitted with:

(a) a bollard capable of withstanding a horizontal pull of 360 tons;
(b) 2 pipes 24 in. in diameter running to a double universal joint at sea level for connecting the riser of the submarine line to the floating hoses linking tower and tanker; on the rotating part of the tower, the two 24 in. pipes are fitted with cut-off valves and may be connected one to the other by means of a by-pass with a gate valve;
(c) a 5-ton service crane;
(d) a lighted beacon and radar reflector at a height of 23 m.

Floating hoses for crude oil discharge: The two 24 in. pipes with which the riser connects on the tower are coupled by universal joints to 2 floating hoses of 24 in. diameter, with 16 in. terminals, each hose being about 310 m. in length and consisting of 29 sections of 10.67 m., of which the last 3 are of 16 in. diameter for connecting to the ship's manifold. They are fitted with a blank flange, a Camlock rapid-closing joint and a Keystone rapid cut-off valve that will ensure perfect tightness and rapid disconnection in an emergency.

The hose connections are exactly 90° left of the bollard with respect to the mooring vessel.

Signal lights and fog horn: The tower is equipped with a regulation flashing white light 23 m. a.s.l. and a fog horn.

The 2 floating hoses are marked at night by 5 red lights visible at a distance of 2 miles.

Request for berth: Mooring at the tower is generally reserved for tankers which, owing to their size and draft, are unable to use the Multedo Oil Dock and have applied for permission to the Port of Genoa Authority Oil Dock Management.

Order of berthing: Arriving tankers that are to work cargo at the tower and are awaiting authorisation to berth thereat must anchor in the roads.

The order of berthing is that of anchorage in the roads and, for vessels authorised to berth, according to the moment when arrival in the roads is signalled to the Port Authority's lookout station at the foot of the main lighthouse in Genoa harbour.

Should it be impossible to communicate with the lookout station, the time when communication is established with the Genoa-Multedo Oil Dock Operations Office over VHF radio, on the frequency that will be notified as soon as possible (normally Channel 6 – 156.3 mc/s.), indicating the point of anchorage or the ship's position, will serve for establishing the order of berthing.

Berthing at the tower will be authorised by the Oil Dock Management upon receipt of the Master's written or radioed assurance that the ship is fully efficient and ready to proceed to berth and commence discharge. The Oil Companies that are receivers of cargoes or in anyway interested as users of the Oil Dock should begin discharge within 4 hours of completion of mooring and continue without interruption, day and night.

Saving cases of proven *force majeure*, vessels moored at the tower must restrict berth occupancy to the time strictly needed for discharge operations and for ballasting.

Berthing at tower: Berthing at the tower will be authorised only weather permitting and must be carried out with the assistance of a Pilot. The Master may ask for the help of tugs, in the number needed to ensure the manoeuvre being executed safely.

Ships should moor using two 15 in. nylon hawsers 65 m. in length, supplied by the tower, each able to withstand a 300 ton pull. The end of each hawser is fitted with a 4.5 m. length of chain of which the last link, devoid of stud, will be made fast to the ship's bow structures for securing mooring ropes.

The section of chain outside the fairleads contains a safety element calculated for a breaking load of 200 tons.

The vessel's mooring structures: anchor plates with aperture for pin, quick release hooks, bollards, steel ropes, warping winches, etc., must be in fully efficient condition and able to withstand the stresses to which they will be subject once the mooring ropes have been made fast to them; they must furthermore allow for the ship's being unmoored at any moment by the crew.

As the mooring hawsers can break for accidental or other unpredictable causes before the limit of 200 tons is reached, despite the inspection normally made before the arrival of each ship, all tankers moored at the tower must at all times have their engines ready to move at full speed.

Safety distance around tower and pipe-line: No ship or other craft may station itself, anchor, fish, or carry out underwater or other activities in the area around the tower and pipe-line, boundaries of which are:

South: parallel 44° 23′ 30″ N.
North: the coast.
West: meridian 8° 49′ 40″ E.
East: meridian 8° 49′ 20″ E.

Excepting for tankers proceeding to the tower and the craft providing harbour services and assistance, or other craft which have been duly authorised, no vessel or whatsoever craft may sail within a radius of 800 m. of the tower.

Mooring and warping ropes: The 2 mooring hawsers will be secured to a bollard which is part of the rotating structure of the tower and about 14 m. a.s.l. When no vessel is at berth, the 2 hawsers float on the surface, supported by red and yellow luminescent sleeves.

The ends of the hawsers are secured to 2 luminescent red buoys which support the lengths of chain that are to be made fast aboard.

Before a tanker arrives, the Port Authority's personnel will make the ends of the chain of each mooring line fast to a big, floating polypropylene rope about 80 m. in length which the vessel must pick up so that she may be slowly warped in to the tower.

Vessel will be moored with the aid of a craft suitable for operations in the open sea.

Watches, emergency services and Master's contacts with personnel engaged in discharge: As though at anchor in the roads, vessels moored at the tower must continue to keep sea watches and retain on board the crew required to cope with any emergency manoeuvre, either for vacating the berth or to meet any other serious event involving the safety of the ship, persons and cargo.

Before commencing discharge, Masters should take steps to see that liaison ensuring rapid and reliable communication between the Oil Dock Management's representatives aboard, the Company interested with the discharge and the Master has been arranged.

Safety measures to keep vessel clear of tower: Vessels at berth must keep sufficiently clear of the outer ring of the tower to ensure that the bow bulb will not collide with the tower structures.

To this end, the Master must adopt all necessary measures and precautions and take such other steps as may be ordered by the Port Authority, including the use of the tender or, should that not suffice, of a tug in order to keep the vessel at a safe distance from the tower.

Vessels needing to activate propellers in order to heat turbines must keep revolution to the minimum and run engines astern.

Hose handling: While vessels are approaching and mooring at the tower, one of the craft will take the floating hoses in tow, arranging and keeping them in a position where they will not hinder manoeuvring.

On completion of mooring, the hoses will be brought alongside the vessel on the port side, so that the ends are level with the ship's manifold, and will be secured to the tackle of the cargo derrick in such a manner that the cargo receivers' personnel and the ship's crew may jointly hoist, connect and get the hoses ready and then begin discharge. Hoses must not be subjected to a pressure of more than 14 kg./sq. cm.

The ship's derrick should be able to lift at least 10 tons.

Stand-by tenders during discharge: During mooring and discharge and until sailing, the Port Authority will keep alongside or in proximity to the tower a stand-by tender of suitable size and power provided with the personnel, material and equipment that will ensure the proper functioning of the tower's facilities and provide any assistance that may be needed in the event of a spillage or other emergency.

Another smaller craft, duly equipped for the purpose, will be provided by the Port Authority for liaison between the Oil Dock, tower, tanker and tender and for transporting personnel or light materials.

The 2 craft will be equipped with continuous listening VHF radio and with anti-pollution and fire-fighting equipment.

Platform services: The services relating to the operation of the tower's fixed and mobile facilities are under the control of the Genoa-Multedo Oil Dock Management, which exercises them through its personnel on the spot.

The employee in charge of services on the tower will be in touch, by VHF radio, with the Oil Dock Management, informing the latter how discharge is proceeding and of any abnormality and receiving from the latter such instructions as may be necessary. Locally, he will keep in touch with the ship's Master and the representative of the Company interested with the discharge in order to facilitate operations in so far as he is responsible and comply with all requests that may result in advantages and in improving safety in general.

Personnel attending to ship's discharge: The Oil Company who is cargo receiver or anyway interested with the discharge and the Master, each within his own field of competence, will jointly supervise and be responsible for discharge and for connecting and disconnecting hoses.

A representative of the cargo receivers appointed for the purpose, will keep in constant touch with the company's booster station and the Oil Dock by means of VHF radio. He will act also in collaboration with the Master and the Port Authority's representative. For connecting and disconnecting hoses, the latter will make available the material and equipment provided on the tender.

Filling of hoses with water when not in use: For reasons of safety and to prevent pollution, the floating hoses must be kept full of water when not in use.

To this end, the 2 hoses are connected in the tower by means of the by-pass before the gate and non-return valves.

In agreement with the Master, the cargo receivers must drain the hoses of water before commencing discharge.

On completion of discharge, the cargo receivers must likewise flush out the hoses to remove all traces of oil, fill then with water, disconnect them, apply the blank flanges, close the Keystone cut-off valves and lower the hoses into the sea.

It is strictly forbidden:

(a) to introduce compressed air or any kind of gas into the hoses or the submarine pipe-line;

(b) to discharge the water from the hoses into the sea at the beginning of operations or that used for flushing the hoses on completion of operations.

During flushing, the cargo receivers must take all precautions against leakage or spillage of the water employed for the purpose.

Interruption of discharge operations for safety reasons: In the event of a deterioration of sea conditions, violent thunderstorms, trouble with the facilities that jeopardises safety, large scale pollution or other dangerous circumstances, the Management of the Oil Dock may, at its own unchallengeable discretion, order:

- immediate interruption of discharge;
- that the hoses be got ready for lowering into the sea;
- the adoption of all such measures as will enable the vessel rapidly to vacate the berth.

In agreement with the cargo receivers, vessels must therefore maintain a trim during discharge that will enable them to take to sea safely at any moment.

Prohibition to pollute. Cleaning up: Ships moored at the tower must not pollute the water with hydrocarbons, solid residues, or oil mixtures of any kind, nor effect gas-freeing or tank cleaning or transfer oil from one tank to another by means of temporary hoses or pipes slung over manholes or other tank apertures.

In the event of oil spills, the Oil Dock Management, without prejudice to the application of the penalties provided by law, will order the anti-pollution equipment of the craft standing by to come into operation at once, at the expense of whomsoever may be concerned, and the despatch of other equipment for cleaning up should it deem this necessary.

Bunkering and victualling: Bunkers, victuals, drinking water and stores must in general be taken aboard while awaiting berth in the roads. Such operations may also be effected with the vessel moored at the tower before or during discharge (but not during ballasting) according to the procedure prescribed by the Oil Dock Management and with observance of the precautions that are ordered.

Ships and any other craft coming alongside tankers must be provided with a sufficient number of strong fenders to prevent hull to hull contact and be fitted with spark arresters on all main and auxiliary engine exhausts.

Authorisation to go aboard: Persons needing to go aboard to do work or for other justified reasons must be provided with an authorisation issued by the Oil Dock Management.

Work on engines: It is forbidden to vessels moored at the tower to carry out works which put the engines out of action or reduce its efficiency.

Other work which cannot be delayed may be authorised exceptionally by the Oil Dock Management at its own discretion provided certain instructions and safety measures are observed.

Transhipments: Vessels moored at the tower may carry out transhipment of their cargoes only to vessels moored in the Oil Dock, for such purposes making use of the pipe-line.

Other regulations: Without prejudice to the regulations currently in force in the waters of the Maritime Department of Genoa, for all such matters as are not expressly provided for in the present regulations there shall be applied, to the extent to which they are applicable, the provisions of the Harbour Police and Safety Regulations for the Genoa-Multedo Oil dock, approved by order No. 10 of the President of the Port of Genoa Authority on the 30th September, 1968, the regulations for bunkering tankers in the Genoa-Multedo Oil dock, approved by decree No. 1384 of the President of the Port of Genoa Authority on the 1st September, 1966, of the Marine Services and Harbour Police Regulations approved by order No. 2 of the President of the Port of Genoa Authority on the 1st March, 1972, and the other laws and regulations in force in the Port of Genoa.

Penalties: Infringements of these regulations will be punished by application of the penalties provided in the Code of Navigation.

Safety rules to complied with during stay of tankers at sea terminal of Genoa-Multedo: The following are the principal safety rules that the Master is bound to strictly comply with and enforce during the stay of the ship under his command of Genoa-Multedo.

1. The main propelling machinery must be kept ready to move (standby) and there must always be available on board a sufficient number of crewmen to enable the ship to leave the berth immediately whenever ordered to by the Port of Genoa Authority (Consorzio autonomo del porto);
2. Vessel must have ready the accommodation ladder on starboard side and – on port side – the pilot ladder rigged forward of the poophouse;
3. Decks and surrounding waters must be properly lighted;
4. When mooring to platform anchors must never be dropped;
5. Vessel's firefighting equipment and the men in charge with its operations must always be ready for immediate action (in case of emergency). Men in drunken state must be watched and kept under supervision;
6. The ends provided with eyes of 2 strong 3.5 in./4 in. wire cables, length of which must be of 80/100 m. (260 ft./330 ft.) at least, must be placed hanging one fore and one aft to enable the ship to be towed out (to sea) in case of fire.
7. Unless authorised to the contrary and which will only be allowed in exceptional cases by the Oil Harbour Master, it is forbidden:

   (a) to carry out repair works, cleaning or gasfreeing of tanks or bunkers, etc.;

   (b) to carry out loading of cargo, water or other liquid products using hoses introduced through the cargo tanks lids.
8. It is strictly prohibited:

   (a) to keep fires of any kind on board, with the only exception of those for the service of ship's boilers and galleys if located in special rooms thoroughly protected against gas exhalations and far from the cargo lines;

   (b) to throw or pump overboard waterballast, bilge-water or water from any other source, that might pollute the port waters;

   (c) to cause escape of oil from the sea valves due to delay in starting the ballast pumps or any other reasons; to cause escape of oil due to leakage of pipes or valves on board; to provoke overflow of oil from cargo tanks. Accidental leakages on deck on deck must be collected into suitable receptacles and – with all precautions – poured again into the cargo tanks or carried ashore; all scuppers on the main deck and particularly those near the cargo manifolds must be plugged during the loading/unloading and ballasting operations;

   (d) the use of devices, tools and wrenches not made of non-sparking material, to connect or disconnect hoses, pipes or pipe fittings and to carry out work to any ship's equipment placed on deck or inside those spaces where the generation and/or presence of gas is possible;

   (e) to smoke on board except in those rooms approved by the Master and to throw overboard lighted matches or cigarettes;

   (f) the use of rocket signals, flares, etc.;

   (g) the use of electric hot plates, fans and other equipment which might produce sparks on deck or into those rooms having openings towards the cargo tanks;

   (h) the use of electric portable lamps and cables and of telephones not being explosion proof;

   (i) to keep open skylights, doors and hatches of spaces located in way of or near the cargo tanks;

   (l) to keep open the cargo tanks lids; to keep open butterworth openings.

   The ship's personnel should take care that all ullage openings and gas vents are provided with spark arresters and that the latter are sound. They also should take care that the spark arresters placed on the funnels and combustion gases exhausts are sound;

   (m) shifting of steel tools, winch manoeuvring, loading and unloading of materials, connecting and disconnecting of cargo hoses during the whole period in which sampling and gauging of cargo tanks is carried out;

   (n) to carry out loading and unloading operations during storms with lightning;

   (o) the idling of pumps. Ship's personnel should immediately stop pumps that – for any reason – should idle;

   (p) the blowing of boiler's tubes;

   (q) the coming onboard of unauthorised people.
9. All engine propelled boats approaching the vessel must be provided with spark arresters on the combustion gas exhausts.
10. During shifting operations into tanks:

    (a) radio apparatus must be switched off and all aerials set to ground;

    (b) cargo lines not in use must have all valves closed and manifolds are to be blank flanged.
11. Loading of ship's stores and equipment should be carried out from the extreme poop. In case the aforesaid operations have to be carried out on deck, near the cargo tanks and should it involve the handling of heavy or metallic materials anyway, all precautions relating to the case or those each time specified by the Oil Harbour Master, should be taken.

    As a general rule the above mentioned operations are not

X

allowed during the loading or ballasting of the ship. The crafts used for the transportation of the materials must approach the ship, stay alongside and move out without making use of the engine.

12. Tankers having on board inflammable or dangerous products, or – being empty or in ballast – having their tanks not certified gasfree, must hoist steadily and well in view, a red flag (letter "B" of the international code of signals) and by night a red light, which can be sighted from round the horizon.

BALLAST: Facilities exist for the collection and clearance of slops by means of special barges.

STEVEDORES: *Working hours:* General cargo: 3 shifts from Monday to Saturday: 0630–1300 hrs., 1300–1930 hrs., 1930–0100 hrs.

A fourth working shift is available from Monday to Friday in the period 15th March/15th November.

Coal, ore, grain: only the first 2 shifts. Italsider Pier: 24 hours daily in 3 shifts.

MEDICAL: All medical assistance available. Advance notice required for urgent cases only.

DENSITY: Varying from 10253 to 10263.

FRESH WATER: Available direct from quay at almost all berths. Supply by lighter, minimum 20 cu. m.

FUEL: All grades available. Delivered by barge. 48 hours notice desirable.

GANGWAY/DECK WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: First opening and last closing normally carried out by crew.

CUSTOMS ALLOWANCES: Tobacco. Customs allow a maximum of 50 cigarettes or 10 cigars, or 50 grams tobacco per person, as long as vessel stays in port. All cigarettes, cigars, etc. must be ready on arrival in a locker in order to be checked and sealed by Customs guards. Wine and/or spirits. Wine allowed any reasonable amounts. Spirits allowed 1 bottle for every 2 Crew members.

CARGO GEAR: Certificates must be in order, otherwise authorities may prevent vessel perform commercial operations, especially if using derricks.

IDENTIFICATION CARDS: Required. Shore passes issued by local police.

CONSULS:

CORRECT 7/78

Argentina
Austria
Belgium
Bolivia
Brazil
Chile
Colombo ia
Congo Brazzaville
Costa Rica
Cuba
Cyprus
Denmark
Dominica
Ecuador
El Salvador
Finland
France
Germany
Greece
Guatemala
Haiti
Honduras
Iceland
India
Indonesia
Ivory Coast
Lebanon
Liberia
Madagascar
Malta
Mexico
Monaco
Netherlands
Nicaragua
Norway
Pakistan
Panama
Paraguay
Peru
Philippines
Portugal
Senegal
Spain
Sweden
Switzerland
Thailand
Tunisia
Turkey
U.K.
Uruguay
U.S.A.
U.S.S.R
Venezuela

REPAIRS: All types of repairs available. Preferable have advance notice of requirements.

DRY DOCKS: 1 floating dry dock, lifting capacity up to 15,000 tons; 7 dry docks (largest dimensions 280×40×12.50 m.). Max. size 100,000 d.w.t.

REPATRIATION: All facilities available.

AIRPORT: Located at about 5 km from town. Served by regular lines, international services.

TIME: Local time in relation to GMT 1 hour ahead. Summer time further 1 hour ahead from May to September.

HOLIDAYS: New Year's Day (1st January); Liberation Day (25th April); Labour Day (1st May); Easter and day after Easter; Patron Saint's Day (24th June); Assumption B.V. Maria (15th August); All Saints' Day (1st November); Immaculate Conception (8th December); Christmas Day (25th December); Holiday (26th December).

Holiday work is available at overtime rates. Generally workers not available on 1st January, 1st May and 25th December. Saturday: work performed after 1200 hrs. is at overtime rates.

POLICE/AMBULANCE/FIRE: Police: tel. 113; 25.69.75; 26.13.95; Ambulance: tel. 59.59.51; Fire: tel. 25.25.25 – 25.80.21.

TELEPHONES: Telephones can be placed on board at the approximate cost of Lire 40,000 for the first 48 hours, and Lire 104,000 for 90 days.

DEVELOPMENTS:

Genoa Port Docks:

Works in progress:

Within the port of Genoa area, the more outstanding works are:

Construction of a 238 m. long wall closing the Eastern inlet of the "Galliera" breakwater;

Carrying out first stage of the new industrial zone including the construction of a giant floating-dock in pre-stressed-reinforced concrete for vessels of up to 350,000 d.w.t. A deep water (−22 m.) 350 m. long, service pier will also be built, together with 400 m. of new quays with 11–20 m. depth alongside and 80,000 sq.m. of connected areas;

Reconstruction of Calata San Lazzarino and Ponte Doria in order to acquire new space for the traffic of Ro/Ro vessels and the connected facilities;

The 125 m. long head quay of Ponte Assereto will be walled with basement at −8.50 m. below sea level. A new openwork pier 140 m. long and new yards 4,500 sq.m. in area to improve traffic within the Ro/Ro vessel zone will be built;

A third container terminal at Calata Sanita will have 669 m. of new berths, 525 m. of which will have 14 m. depth alongside and the remainder 9 m. Junction roads with Piazzale San Benigno and the existing motorway system will also be built along with an open area of 130,000 sq.m. and an 8,000 sq.m. area warehouse:

Conversion of Ponte San Giorgio into a high unloading output facility for bulk cargoes. This involves the complete remake of the road and railway networks and the installation on the Eastern quay of 2 elevators each having a 20 ton lifting capacity;

Enlargement of the pier for the handling of timber by closing and filling in the small basin, Ignazio Inglese, thus recovering a 30,000 sq.m. area;

Resetting of the Ponte Libia and Ponte Canepa zones where new yards for the handling of containers will be recovered;

Enlargement of the Nino Ronco container terminal where a new quay will be built having a total length of 473 m., 331 of which will have 13 m. depth alongside and the remainder 12 m. An adjacent 30,000 sq.m. storage area for containers will also be realised.

Besides the above listed works, there are others worthy of mention as follows:

Resetting of the Nos. 1, 2 and 3 dry-docks where 2 new cranes having 10 and 20 tons capacity will be installed;

Construction of a new office building for the Company of the industrial branch workers;

Construction of a new workshop for the maintenance of self-propelling cranes and locomotives;

Purchase of a new bridge-crane to be installed at Ponte Libia Container Yard. This will have a 54 m. span and a 45 ton lifting capacity.

Medium term works:

Rectification of the Calata Gadda and Calata Boccardo quays thus allowing a more efficient use for ship repair purposes;

Completion of the road and railway improvement works in the zone between the Molo Vecchio Dock and Ponte Morosini;

Enlargement of the Ponte Libia Container Terminal, where the check-point will be moved and the customs limit rectified thus allowing the recovery of a 4,500 sq.m. area;

Second stage of the improvement works at Ponte Canepa where some existing buildings will be demolished and the resulting area acquired for the container traffic.

Long term works:

Completion of the San Benigno area arrangement works.

Oil Harbour:

Works in progress: The cleaning plant will be improved and modified to comply with the IMCO Regulations.

Voltri Dock:

Works in progress:

Seaward filling in works will be continued;

The protection breakwater will be extended 500 m. Eastward;

Construction of the Western undersurge jetty (600 m.) and of a rocky slope connecting the jetty with the existing embankment (150 m.);

End-stretch of the seaward road connecting the material excavation area with the sea zone to be filled in.

Medium term works:

Include part of the works needed to carry out the first stage of the Voltri Dock which will have 8 berths for Ro/Ro vessels and a quay 850 m. long for container ships; this quay could be extended further Westward to a length of 1,250 m. As an alternative solution a large 16 hectare yard could be reclaimed at the Western end.

The total area, including the above mentioned yards, will be about 180 hectares.

AUTHORITY: Consorzio Autonomo del Porto di Genoa.

LA SPEZIA: 44.06 N. 09.49 E. (See Plan Book)

DOCUMENTS:

3 Crew Lists.
3 Passenger Lists.
1 Provisions List.
List of Parcels.
1 Cargo Manifest.
1 Bill of Lading.
All Ship's Certificates including Italian Anchorage Dues.

PILOTAGE: Compulsory. Pilot station situated on breakwater at entrance to Gulf. 1 hours notice to Pilots required for shifting, sailing vessel, Pilot boards incoming vessels at Torre Scuola.

ANCHORAGE: Safe areas available in depths 25 to 34 ft. Mud bottom, no tide. Tankers: if waiting berth required to anchor in Safety Zone immediately behind the breakwater. If this anchorage is occupied by 2 vessels later arrivals must anchor outside the Gulf.

RESTRICTIONS: Western entrance to Gulf is 400 m. wide with depth of 42 ft. 6 in. The dredged channel to the port is 42 ft. deep. Eastern entrance is 200 m. wide used by smaller vessels only.

MAX. SIZE: Limited only by draft; 33 ft. for the Mercantile Port and grain silos. For vessels proceeding to coal berth max. draft 30 ft. 4 in. For vessels proceeding to Enel Pier max. draft 35 ft.

Tankers up to 40 ft. draft accommodated.

HEALTH: Radio pratique may be requested to Sanimare-Laspezia before arrival. Pratique is automatic for vessels from Ports in U.K., France, Belgium, Holland, W. Germany, Greece and Italy.

RADIO: Genoa Radio – ICB or Marina Militare ICS. Radio telephone station at Leghorn, transmitting 2591 kHz., receiving 2182 kHz.

VHF: Pilot Service Channel 14, Port Control Channel 9, Harbour Master Channel 16, and boat service Channel 12.

TUGS: 7 tugs available up to 1,500 h.p. For large tankers, 4 tugs usually used.

BERTHING:

Garibaldi Quay, West Side: Length 510 m., with 3 berths for ships up to 10,000 d.w.t.: 27 ft. to 29 ft. draft.

Garibaldi Quay, East Side: Length 350 m. (of which 220 m. for ships up to 20,000 d.w.t.).

Malaspina Dock: Length 200 m. Depth 20–21 ft.

Paita Dock: Length 535 m. 3 berths for ships up to 22,000 d.w.t. and 29–30 ft. draft. The depth at No. 7 berth (grain silo) has been increased to 33 ft.

Italia Quay: East Side: Length 368 m. for vessels 18–19.5 ft. draft. No railway and no mechanical unloading equipment.

Dock: No. 8: (Projecting between Paita Dock and Customs Dock) Length 80 m. Depth 18 ft. No railway or mechanical equipment.

ENEL Quay: Length 200 m., max. depth 11.50 m. Max. size 22,000 d.w.t. 2 cranes each with capacity of 10 tons, also unloading systems for mineral oils.

TANKERS: Shell Pier, length 177 m., with 4 berths up to 39 ft. 6 in. depth.

SPI Buoy Terminal, situated 650 m. from San Bartolomeo shore. Vessels moor stern towards the shore. A crude oil discharge berth in depth of 11.50 m., suitable for tankers up to 36 ft. draft and 30,000 d.w.t. Other oil berths at ENEL Quay, depth 35 ft. SNAM terminal for loading situated in Panigaglia Bay. Length 498 m., depth alongside 39 ft. Berths for 2 vessels.

Safety regulations are handed to Master on arrival and must be strictly observed. No shore steam or electricity available. At Shell pier, no goods may be loaded from shore.

Slop discharge facilities available only at the Shell pier.

BULK HANDLING FACILITIES: Ferruzzi Grain Silos, capacity 39,450 tons, at Paita Dock. Discharge by 2 mechanical conveyors, capacity 250 t.p.h. each.

At Garibaldi Quay grain discharged by 4 vacuum-operated intake pipes, capacity 400 t.p.h. Capacity of silos, 30,000 tons. Length of quay 220 m., depth 35 ft. Will accept vessels of 30,000 d.w.t.

Coal conveyor system at Paita Dock, capacity 450 t.p.h. from colliers and 330 t.p.h. from other vessels. Capacity of silos 12,000 cu.m.

CONTAINER TERMINAL: Situated on the Eastern side of the Commercial Port. Owned by Contship of Cadenazzo. Crane for discharging and handling containers up to 40 ft. max. draft 18 ft.

CRANES:

Garibaldi Quay, West Side:

Berth No. 1: 3 bridge cranes, capacity 6 tons (hook and bucket operation).

Berth No. 2: 2 bridge cranes, capacity 6 tons (hook and bucket operation).
1 bridge crane, capacity 8 tons (hook and bucket operation).

Berth No. 3: 1 bridge crane, capacity 4.5 tons (hook operation).
2 bridge cranes, capacity 6 tons (hook and bucket operation).

East Quay:

Berth No. 9: 1 rail-mounted crane, capacity 3-6 tons (hook and bucket operation).

Malaspina Dock:

Berth No. 4: 1 loco-gantry crane, capacity 4 tons (hook only).
2 loco-gantry cranes, capacity 2 tons (hook only).
2 loco-gantry cranes, capacity 3 tons (hook only).

Paita Dock:

Berth No. 5: 2 overhead travelling cranes, 10 ton capacity, travel 120 m.

Berths No. 6 & 7: 4 jib cranes, capacity 3–6 tons (hook and bucket operation). 1 travelling bridge Goliath crane, for marble – hook only, capacity 30 tons. 1 self-propelled crane, capacity 1.5–9 tons, (hook and bucket operation).

STEVEDORES: Gangs to be ordered by 0700 hrs. for morning shift, and by 1300 hrs. for afternoon shift every normal day from Monday to Friday. For mechanised work the same routine is to be followed. Saturdays, morning is considered as overtime work (tariff plus 27.50%). On the afternoon of Saturday, time is considered as holidays and so are Sundays. Saturdays and Sundays shift to be ordered on Friday afternoon within 1530 hrs.

MEDICAL: All facilities available. Vaccination/inoculation can be arranged. Prior notice should be given if urgent attention required on arrival.

FRESH WATER: Available at most berths, or by barge.

FUEL: Can be taken concurrent discharge at Shell Pier and S.P.I. terminal. Supplied by barge at other berths.

IDENTIFICATION CARDS: Shore passes issued to crew.

CONSULS: Following countries represented at Spezia: Denmark, France, Finland, Holland, Norway, Portugal, Sweden.

REPAIRS: Naval and civil repair yards can undertake all types of work.

DRY DOCKS: Available only when not used for naval vessels: No. 5, 209.65 m. by 27.60 m.; No. 6, 210.20 m. by 23.10 m. Floating dock for 110,000 d.w.t.

TIME: GMT plus 1 hour.

HOLIDAYS: New Year's Day (1st January); Epiphany (6th January); St. Joseph (19th March); Liberation Day (25th April); Labour Day (1st May); Easter and Day after Easter; Ascension Day; Corpus Domini; Proclamation Day (2nd June); St. Peter and St. Paul (29th June); Assumption B.V. Maria (15th August); All Saints' Day (1st November); Victoria Day (4th November); Immaculate Conception (8th December); Christmas Day (25th December); Boxing Day (26th December).

SHORE LEAVE: Allowed.

AUTHORITY: Capitaneria di Porto.

LIVORNO (Leghorn): 43.33 N. 10.20 E.

(See Plan Book)

DOCUMENTS: Complete set of Manifests and B/Ls relative to cargo destined for this port. Complete set of Manifests of all cargo in transit. 3 Crew Lists. 3 Passenger Lists. All ship's documents.

ANCHORAGE: Anywhere between 1–1.5 miles from breakwater.

PILOTAGE: Sound signals for calling Pilot, 3 long blasts, or international signal "G". Pilot boards vessels 1 mile from breakwater.

RESTRICTIONS: No night berthing for tankers; no restrictions for tankers on sailing, when empty and up to 15,000 gross tonnage according to weather conditions.

MAX. SIZE: Max. draft for commercial port 34 ft. 6 in.; for oil carriers: 37 ft. 6 in. for tankers up to the length of 215 m. or 34 ft. 6 in. for tankers from 215 to 240 m. length.

HEALTH: To obtain free pratique by radio cable to "Sanimare", Livorno, advising all health particulars at least 12 hours before arrival.

RADIO: Roma Radio generally used for communications.

VHF: 24 hour service on Channel 16 and 14.

TUGS: Tugs normally join vessel at entrance of the port. Ship's lines used.

BERTHING: Alto Fondale, depth alongside 34 ft. 6 in.
Calata Orlando, depth alongside 28 ft. 6 in.
Calata Carrata, depth alongside 25 ft.
Calata Pisa, depth alongside 25 ft.
Calata Depositi Franco, depth 29 ft.
Calata Sgarallino, depth 28 ft. 6 in.

BULK HANDLING FACILITIES: Grain: discharging rate 1,000 to 1,500 m. tons per day.

Ore and coal bulk: discharged by shore elevators at Calata Orlando, discharging rate 1,500 to 2,000 tons per day.

TANKERS: 2 berths at Darsena Petroli for tankers up to 240 m. length, draft 39 ft. 6 in.

4 other tanker berths, for vessels up to 30 ft. draft.

Loaded tankers berth only in daylight hours, tankers may sail up to midnight.

No slop facilities available.

STEVEDORES: ETA required by Agent in order to arrange matters with stevedores at least 48 hours before arrival.

MEDICAL: It is advisable to give details of assistance required together with ETA cable. Hospital facilities available.

FRESH WATER: Available, by pipe-line. On other quays delivery by barge.

FUEL: All grades available from berth. Advance notice required 48 hours; supply subject to Owners' stem.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CERTIFICATES: All ship's certificates required.

CUSTOMS ALLOWANCES: Tobacco. 50 cigarettes, or 50 grams tobacco per man for the first 24 hours. Wine and/or Spirits. Only in consignment of the Master.

IDENTIFICATION CARDS: Issued by local police authorities.

CONSULS:

Denmark
Finland
France
West Germany
Greece
Haiti
Liberia
Monaco
Netherlands
Norway
Peru
Portugal
Spain
Sweden
Switzerland

REPAIRS: All types of deck and engine repairs are possible.

DRY DOCKS: Dry docks suitable to accommodate a Liberty type ship. A small floating dry dock for vessels up to maximum of 1,500 tons.

New Graving dock 350 m. × 56 m.

REPATRIATION: All necessary repatriations possible.

AIRPORT: Nearest at Pisa, distance about 20 km.; served by Alitalia and British Airways.

TIME: Local time is 1 hour ahead of GMT, and Summer time 2 hours ahead.

HOLIDAYS: 1st January, 6th January, 19th March, Easter Monday, 25th April, 1st May, 23rd May, 2nd June, 13th June, 29th June, 15th August, 1st November, 4th November, 8th December, 25th December, 26th December. On these days work can be arranged with an increase of 150%. Some of these holidays are liable to be abolished in 1977.

TELEPHONES: Only at some quays is it possible to place telephones on board.

AUTHORITY: Camera di Comercio Industria e Agricultura Livorno.

AGENT: G. Fanfani & Co., via Fiume 15, Livorno. Tel: 28151 (5 lines) after hours 804347 and 801931. Telex: 50006 Cables: FANFANICO.

MANFREDONIA: 41.37 N. 15.55 E.

DOCUMENTS:
5 Crew Lists.
3 Provision Lists.
3 Lists of Crew Possessions.
Customs Documents.
Cargo Manifests.
Bills of Lading.
Ship's Papers.

PILOTAGE: Compulsory for vessels over 300 tons. Pilot boards 1 mile off Mole di Levante. No VHF station.

ANCHORAGE: Good holding ground in 5 fathoms, 1 mile S.E. from Mole di Levante. Sheltered from all winds, except N.E. to S.E.

RESTRICTIONS: Depth 23 ft. at breakwater entrance, which is 1.25 cables wide. Depth 23 ft. alongside Mole di Ponette, for a length of 1,500 ft.

HEALTH: Pratique given at anchorage.

RADIO: Radio Roma, call sign "IAR".

TUGS: 3. Tugs make fast at anchorage and tow vessel into harbour (in the case of large vessels). Ships lines used.

STEVEDORES: 100 men available.

MEDICAL: There is a small hospital.

FRESH WATER: Available.

FUEL OIL: Not available.

GANGWAY/DECK WATCHMEN: Available, but unnecessary.

OPENING/CLOSING HATCHES: By crew.

CUSTOMS ALLOWANCE: 40 cigarettes per man. 1 bottle spirits.

IDENTIFICATION CARDS: Shore passes are issued by Police on arrival.

CONSULS: None.

REPAIRS: Only small repairs.

REPATRIATION: Can be arranged.

AIRPORT: Bari and Foggia.

TIME: GMT plus 1. Alterations to clocks are made from Spring to beginning of Autumn, then GMT plus 2 hours.

POLICE/AMBULANCE/FIRE: All services telephone 113.

TELEPHONE: Situated at Main Gate, end of Mole di Ponette.

SHORE LEAVE: No restrictions.

DEVELOPMENTS: Large future development expected. At present a new jetty is under construction, extends in a S.E. direction for 1.25 miles to seaward, about 0.5 mile east of Mole di Levante. Depth alongside this jetty will be 12 m. Owing to construction it is advisable, when arriving at night, to remain about 3 miles off until morning, when a closer approach can be made.

AUTHORITY: Harbour Master.

MESSINA: 38.11 N. 15.34 E.

DOCUMENTS: If vessel comes from foreign port, whenever possible, at least 1 copy of Crew List and Passenger List to be sent some days before her arrival, so that they can be delivered to police in advance. Required on arrival:
3 Crew Lists.
1 Provisions List.
3 Lists Passengers in Transit.
3 Lists Passengers Disembarking.
1 List of Articles – new and Customs-barred in possession each crew member – cameras, binoculars, radios, cigarettes, tobacco, new articles, etc. If on inspection articles or quantities not in conformity or in excess, Master responsible; articles removed and heavy fine imposed.

Copies of Cargo Manifest also to be prepared on arrival.

If Anchorage Dues already paid and still in force, the relative receipt to be shown to the harbour Authorities, together with other ship's papers and report of arrival to be delivered to them.

PILOTAGE: Pilot meets vessel at about 1 mile from port's entrance. On request he can meet vessel at a greater distance, but additional tariff to be paid. Pilotage through Messina Straights is available but not compulsory.

ANCHORAGES: Allowed outside harbour; at Paradiso's Bay, sufficient depths for safe anchorage existing. Advisable to request Pilot's assistance for indication of best anchorages.

RESTRICTIONS: For entering harbour during night-time ETA to be given in advance.

MAX. SIZE: Max. draft allowed: 33 ft. at passenger quay: Other berths 27 ft.

Max. length 200–300 m.

Tankers: Length 100 m., draft 27 ft.

HEALTH: Free pratique automatic for vessels coming from other Italian ports and quarantine flag not to be flown on entering. From other countries usual procedure applies.

RADIO: Contact through Rome Radio, Naples Radio, Augusta Radio, or Messina Radio.

TUGS: Not compulsory. Tugs join vessels at about 0.5 mile from entrance of harbour. If tug's lines used increase of 10% on tariff.

STEVEDORES: To enable Agent order gangs important obtain accurate ETA. Latest time to order gangs: normal shift 0730 hrs. for work in the morning; 1200 hrs. for work in afternoon; night shift 1600 hrs. same day – Saturday noon or Sunday at 1200 hrs. on Saturday.

Failure to give ETA results in cost of waiting gangs, charged to vessel.

Tonnage: Per gang in 8 hours: General cargo 50 ton – cereals 80 ton.

MEDICAL: Doctor can attend sick crew members or for vaccinations. Hospitals available.

TANKERS: There is an Esso bunkering station only. Small tankers from time to time discharge fuel oil, gasoline, etc.

FRESH WATER: All quays have water pipe-line connections and water may be supplied day and night (provided ETA given) directly from ashore by hoses; during Summer time water may be supplied from 0700 to 1100 hrs. only.

GANGWAY/DECK WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: May be carried out by the crew or stevedores.

CERTIFICATES:
Safety Certificate.
Wireless Safety Certificate.
Freeboard Certificate.
Deratisation Certificate.
Anchorage Duties Voucher.
Crew List.
Passenger List.
Construction Certificate.

CUSTOMS ALLOWANCES: 50 grms. tobacco for each seaman. Spirits: 0.75 bottle for all crew.

IDENTIFICATION CARDS: Required.

CONSULS:
Argentina
Great Britain
Norway
Sweden
Colombia
Holland
Peru
Germany
Panama
Denmark
Finland
Guatemala

REPAIRS: Almost all types of deck and engine repairs can be carried out.

DRY DOCK: Dry dock belonging to Italian Navy. If it is not engaged for warships it can be hired. Therefore application must be granted by the Marina Militare. Dimensions are as follows: 492 ft.×52 ft. 7 in. (bottom), 81 ft. 6 in.×24 ft. 8 in. (top).

Smaller floating dry dock available, but also belongs to Italian Navy. One graving dock, length 250 m., breadth 38 m.

REPATRIATION: No particular facilities existing; but necessary repatriation can normally be arranged.

AIRPORT: Reggio Calabria Airport – distance about 10 km. From Messina, Reggio Calabria can be reached in 15 minutes by hydrofoil boats, which run every half hour (about). Flights from Reggio Airport in Winter, 1 per day; in Summer, 2 per day.

TIME: In relation to GMT local time is an hour ahead. During Summer, from June to September, clocks are put 1 hour forward.

HOLIDAYS: Work can be arranged, provided timely notice is given, in following official holidays, paying the respective increase on normal tariff:

New Year's Day (January 1st); Epiphany (January 6th); March 19th; Easter Monday; 25th April; 1st May; Ascension Day; June 2nd; June 3rd; local religious holiday; Corpus Domini; 9th July; 15th August; 1st November; 4th November; 25th December; 26th December.

POLICE/AMBULANCE/FIRE: Police, 46830; Ambulance, 45070; Fire, 30222.

TELEPHONES: No arrangements exist.

SHORE LEAVE: Allowed.

AUTHORITY: Il Comandante Colonello di Porto.

MILAZZO (Sicily): 38.13 N. 15.16 E. (See Plan Book)

DOCUMENTS:
6 Crew Lists.
6 Passenger Lists.
Provisions Manifest.
Manifest of Crew Personal Effects.
Cargo Manifest.
Arrival Report – completed on arrival.
Maritime Declaration of Health Certificate – completed on arrival.
Ship's Certificates, including Italian Authority dues.
Vaccination Certificates for sighting.

ARRIVAL ADVICE: At least 24 hours notice of arrival to be passed to Agent in order to obtain allocation of berth from Port Authority. Consignees-Receivers as for Charter Party.

PILOTAGE: Pilot boards 1.5 miles off the berths. International Code signals used. Pilot can be contacted on VHF Channel 12. Compulsory for vessels over 500 g.r.t. (Berthing/Unberthing).

ANCHORAGE: There are 6 anchorages for tankers over 3,000 g.r.t.
No. 1 to 600 m. off the harbour green light – Bearing 034°
No. 2 to 920 m. ,, ,, ,, ,, ,, – ,, 091°
No. 3 to 3,870 m. ,, ,, ,, ,, ,, – ,, 097°
No. 4 to 3,050 m. ,, ,, ,, ,, ,, – ,, 101°
No. 5 to 1,200 m. ,, ,, ,, ,, ,, – ,, 036°
No. 6 to 1,600 m. ,, ,, ,, ,, ,, – ,, 065°

Anchoring prohibited within 1 mile of Refinery Wharves. Pilot can be used for anchoring but not compulsory.

RESTRICTIONS: Large tankers are berthed in daylight hours only, medium and small tankers all hours. Unberthing all hours.

MAX. SIZE: Tankers up to 326,000 d.w.t.

RADIO: Harbour Master Authority, Mediterranea Refinery, Pilot and Tugs may be contacted on VHF Channel 12. Harbour Master Authority may be contacted also on VHF Channel 16.

HEALTH: Free pratique on board may be requested on arrival by way of ship's Agents. It is perfecting the procedure to obtain free pratique by radio. Pratique is automatic for vessels coming from ports in Italy, U.K., France, Belgium, Holland, W. Germany and Greece.

TUGS: 6 tugs available, 2×2,500 h.p., and 4×1,000 h.p. Meet vessel 0.75 miles off berths. Obligatory, at least one for mooring/unmooring tankers over 3,000 g.r.t. Ship's lines used.

DRY CARGO FACILITIES: Ludovico Mazzullo Jetty, length 340 m., depth 22 ft.; Pennello Eolie Jetty, length 65 m., depth 23 ft.

MEDITERRANEA REFINERY FACILITIES: 10 berths for Tankers, distributed in 3 Jetties as follows:

No. 1 Jetty: (West Jetty) 500 m. long, for loading/unloading, with the following berths:

Berth No. 1 (West side – Outer end) – depth 48 ft.
Berth No. 2 (East side – Outer end) – depth 48 ft.
Berth No. 3 (West side – Inner end) – depth 16 ft.
Berth No. 4 (East side – Inner end) – depth 20 ft.

Arms: 12 in. and 8 in. – Ballast lines 2×10 in. – Cargo lines 20, 16, 12 and 10 in.

No. 2 Jetty: (Middle Jetty.) 650 m. long, for loading/unloading, with the following berths:

Berth No. 5 (West side – Middle) – depth 55 ft.
Berth No. 6 (East side – Middle) – depth 55 ft.

Arms:12 in. – Ballast line 1×20 in. – Cargo lines 2×40 in. (Crude oil) – 20, 16, 12 in. (Fuel oil) – 20 in. (Gasoil) – 12 in. (Virgin Naphtha) – 10 in. (Super Gasoline) – 10 in. (Normal Gasoline) – 10 in. (Kerosine).

Berth No. 5 bis (West side – Outer end) – depth 83 ft.
Berth No. 6 bis (East side – Outer end) – depth 75 ft.

Arms: 16 in. – Crude oil lines 2×40 in.

Berth No. 7 (West side – Inner end) – depth 20 ft.
Berth No. 8 (East side – Inner end) – depth 20 ft.

No. 3 Jetty: (East Jetty) 558 m. long, for loading/unloading under construction, with following berths:

Berth No. 9 (West side) – depth 45ft.
Berth No. 10 (East side) – depth 45 ft.

No. 1, 3, 4, 7 and 8 berths also LPG lines.

Vessels berth head out. Lines run to mooring dolphin ahead and astern. Anchor is compulsory only for small tonnage tankers. Tankers may use wire ropes only on the jetty mooring hook. On the bitts may use wire ropes only if the eyes are made of manila or nylon. For tankers alongside the jetty it is compulsory to have ahead and astern, outside, wire ropes with eye back.

MEDICAL: All facilities available.

FIRE WATCHMEN: Compulsory for tankers alongside the Refinery Mediterranea jetties. Number of watchmen onboard is variable, according to the cargo Class ("A", "B" or "C") loading/discharging and to the tankers g.r.t.

GANGWAY/DECK WATCHMEN: Watchmen service available. It is, however, recommended but not compulsory.

FRESH WATER: Boiler and drinking water supplied from the jetty. At anchorage by barge. Max. pumping rate 50 t.p.h.

FUEL: All grades available at Mediterranea Refinery berths, subject to prior notice. Also available at Milazzo Dry cargo harbour berths all grades available by tank or truck.

BALLAST: Ballast facilities available at Mediterranea's berths. Reception 1,000 t.p.h. No restrictions on capacity.

IDENTIFICATION CARDS: Shore passes given by local police.

TIME: GMT plus 1 hour. Summer-time: May to September GMT plus 2 hours.

HOLIDAYS: Cargo work can be arranged on every day.

REPAIRS: All types of deck/engine repairs possible. Experienced and established marine workshops available.

CUSTOMS ALLOWANCES: 50 cigarettes are allowed per man per day for the first 2 days.

CONSULS: No Consul in Milazzo. The nearest are in Messina for the following countries: Peru, Great Britain, Argentine, Norway, Uruguay, Chile, Denmark, Germany, Australia.

AIRPORT: The nearest is at Reggio Calabria where there are 3 regular flights per day. Reggio Calabria can be reached by car and by hydrofoil in about 2 hours. Catania airport also nearby, and may be reached by car or train in about 2 hours.

TELEPHONE: Connections possible at Refinery Wharves.

GARBAGE: Boats are available, and compulsory for vessels 24 hours after arrival.

SHORE LEAVE: Allowed but transit through the refinery area not permitted except in emergency. Boats are available for hire from wharves and anchorage to the landing pier in the port of Milazzo. Shore passes given by local police.

AUTHORITY: Ufficio Circondariale Marittimo and Mediterranea-Raffineria Siciliana Petroli, S.p.A.

MONFALCONE: 45.48 N. 13.32 E.

PORT LIMITS: A vessel is considered to be an "arrived ship" when it arrives within the anchorage zone, S.W. of Duino.

DOCUMENTS:

Arrival Report.
Crew List.
Passenger List.
Customs Documents.
Health Documents (only for vessels that are not arriving from the United States, and are members of the West European Union).

PILOTAGE: Pilotage service is the responsibility of the Harbour Office, and is carried out by local Pilots. Pilots are not supplied with radio equipment. Pilotage service has to be requested by radio via Trieste radio station, to the Harbour Office. Pilotage is compulsory for vessels over 400 g.r.t. Pilot boat is equipped with VHF and is stationed along the access channel or near to the channel entrance buoy. Pilot boards about one mile from the entrance buoy.

ANCHORAGE: Vessels awaiting entry to the port are required to anchor between Duino and Sistiana, about 3 miles from the entrance. At the port entrance the depth is about 10 m. The anchorage provides good shelter from winds from the first and fourth quarters. Good anchorage in sand and gravel.

RESTRICTIONS: Entry to port is permissible from daybreak to sunset. Entrance channel has depth of 12 m.

MAX. SIZE: Maximum permissible draft 24 ft. 3 in.

HEALTH: Vessels calling from countries that are not members of the West European Union are required to provide a Maritime Declaration of Health. In the event of any disease or epidemic on board, advice has to be sent to the Maritime Health Office by radio.

RADIO: Nearest coast station is Trieste Radio, through which all radio messages should be routed.

TUGS: Tug service is optional, but the Maritime Authority can make service temporarily compulsory.

BERTHING: 630 m. of berth length for discharging generals, and 120 m. berth length for discharging cereals. Depth alongside berths approximately 7 m. Berths are equipped with mobile cranes.

BUNK HANDLING FACILITIES: Silo berth is well equipped for discharging cereals.

TANKERS: The port receives tankers with cargoes for Enel.

DENSITY: Average 1027.

FRESH WATER: Available at all berths.

FUEL: Bukering is by barge or tank truck only.

CONSULS: None at Monfalcone, but available at Trieste.

REPAIRS: Minor repairs only.

GANGWAY/DECK WATCHMEN: Not compulsory, but available through Agent.

OPENING/CLOSING HATCHES: Opened and closed by ship's crew.

AIRPORT: Distance to airport 5 km. Two flights a day to Rome.

HOLIDAYS: 1st and 6th January, 19th March, 25th April, 1st May, 2nd and 29th June, 15th August, 1st and 4th November, 25th and 26th December, first day after Easter, Ascension Day, Corpus Domini Day.

POLICE/AMBULANCE/FIRE: Police 113 or 72715. Ambulance 72249. Fire 72222.

TELEPHONES: Not available to be placed on board.

SHORE LEAVE: Permitted.

AUTHORITY: Harbour Master.

NAPLES: 40.50 N. 14.17 E. (See Plan Book)

DOCUMENTS:

6 Crew Lists.
6 Passenger Lists.
Provisions Manifest.
Manifest of Crew Personal Effects.
Cargo Manifest.
Arrival Report – completed on arrival.
Maritime Declaration of Health Certificate – completed on arrival.
Ship's Certificates, including Italian Authority Dues.
Vaccination Certificates for sighting.

PILOTAGE: 15 Pilots and 3 motor launches. Pilot station Tel. 322.832 and 312.604.

ANCHORAGES: Approximately 70, having depths ranging from 11 to 15 m.

RESTRICTIONS: 2 port entrances of which the Western is 300 m. wide, the Eastern is 250 m. wide.

MAX. SIZE: Tankers up to 45 ft. draft.

HEALTH: Free pratique may be requested by radio to "Sanimare Naples" between 12 to 6 hours before arrival advising vessel's name, nationality, last port, number of passengers and crew, and state of health on board, Pratique is automatic for vessels coming from ports in Italy, U.K., France, Belgium, Holland, W. Germany and Greece.

TUGS: 19 tugs available as required to assist berthing.

CRANES:

Electric: 17 at 3 tons, 19 at 6 tons, 6 at 15 tons and 3 at 45 ton capacity.

Floating: 1 of 100 ton (Italian Navy) and 1 of 60 ton (SEBN).

BULK HANDLING FACILITIES:

Coal: Four 6 ton units with hourly payload of 400 tons.

Cereals: Five units with hourly payload of 520 tons.

Containers: One 40 ton container bridge crane at Flavio Gioia Pier, capable of a lift every 2 minutes.

TANKERS: The petroleum port is located at the far East area of the port of Naples and consists of the Vigliena Pier, Calata Progresso and Progresso Pier. The petroleum port is exclusively used for handling crude oil and petroleum products at its 11 berths, and several pipe-lines connect these berths with the Naples Refinery of Mobil Oil Italiana, the plant of Mobil Chimica Italiana and the bulk plants of Agip, Esso Standard Italiana and IIP (ex-Shell Italiana) which are all located in industrial area of Naples adjoining the petroleum port at a distance not exceeding 4 miles. The maximum size of crude tankers, fully loaded, which can be accommodated at Progresso pier is 90,000 d.w.t.

BERTHING:

	Berth No.	*Depth*
Molo Angioino Ponente	5	33 ft.
	6	35 ft.
	7	35 ft.
Molo Angioino Testata	8	35 ft.
Molo Angioino Levante	9	35 ft.
	10	35 ft.
	11	32 ft.
Calata Piliero	12	28 ft.
	13	28 ft.
	14	26 ft.
Pontile Immacolatella Vecchia	15	28 ft.
Calata Porta di Massa	16/17	30 ft.
	18	27 ft.
	19	27 ft.
	20	27 ft. 6 in.
Pontile Pisacane Ponente	21	31 ft.
	22	31 ft.
Pontile Pisacane Testata	23	31 ft.
Pontile Pisacane Levante	24	27 ft.
	25	28 ft.
Villa Popolo Ponente	26	24 ft.
Pontile Silos Ponente	27	32 ft.
Pontile Silos Levante	27	30 ft.
Villa Popolo Levante	28	28 ft.
Molo Carmine Ponente	29	29 ft.
	29	30 ft.
	30	29 ft.
Molo Martello	—	30 ft.
Molo Carmine Levante	31	25 ft.
	32	—
Testate Bacini	32	30 ft.
Cesario Console Ponente	33	26 ft.
Cesario Console Levante	34	26 ft.
	35	26 ft.
Calata Marinella	36	—
	37	27 ft.
	38	—
Vittorio Emanuele Ponente	39	—
	40	27 ft.
Vittorio Emanuele Levante	42	30 ft.
	43	29 ft.
Vittorio Veneto Calata	44	29 ft.
Flavio Gioia Ponente	45	27 ft.
	46	27 ft.
Flavio Gioia Testata	47	28 ft.
Flavio Gioia Levante	48	28 ft.
	49	30 ft.
Calata Granili	50	29 ft. 5 in.
Bausan Ponente	51	31 ft.
	52	31 ft.
Bausan Testata	53	31 ft.
Bausan Levante	54	29 ft.
	55	29 ft.
Calata Pollena	56	35 ft.
Calata Vigliena Ponente	57	27 ft.
Darsena Pellegrino	57	18 ft.
	57	18 ft.
Calata Vigliena Levante	58	28 ft.
Vigliena Ponente	59	31 ft.
	60	31 ft.
Vigliena Testata	61	25 ft.
Vigliena Pennello	62	25 ft.
	63	33 ft.
Vigliena Levante	64	38 ft.
	65	38 ft.
	66	38 ft.
Calata Progresso	67	25 ft.
Calata Progresso	68	25 ft.
Molo Progresso Ponente	69	47 ft.
Diga Curvilinea		17 ft. depth
Molo San Vincenzo	—	at 5 m. from quay

FRESH WATER: Water pipe-lines are connected to all wharves and piers in Port. Water barges available.

FUEL: All grades available. Delivered by barge subject to advance notice given.

REPAIRS: All types of ship repairs can be carried out by the shipyards of Soc. Esercizio Bacini Napoletani and Soc. Cantieri Pellegrino, at Pontile Vigliena.

DRY DOCKS: 3 graving docks with dimensions as follows:
Length 202 m., width 28.9 m.
Length 113 m., width 20.5 m.
Length 349 m., width 45 m.
In addition 2 floating docks:
Length 228 m., width 24 m.
Length 233 m., width 37 m., lifting capacity 28,000 tons

CONSULS: The following countries are represented in Naples:

Argentina
Belgium
Brazil
Denmark
Egypt
Finland
France
Germany
Great Britain
Greece
Indonesia
Liberia
Netherlands
Norway
Panama
Portugal
Spain
Sweden
Switzerland
Turkey
U.S.A.
Uruguay

CUSTOMS ALLOWANCES: 40 cigarettes and 1 opened bottle wine/spirits per man.

IDENTIFICATION CARDS: Shore passes given by local police.

AIRPORT: Capodichino Airport, situated 8 km. from city. Full international services.

POLICE/FIRE/AMBULANCE: Police Tel. 315032; Fire 330210; Ambulance 351450.

TELEPHONES: Telephone system permits the connecting up of the ships in all berths with the city network.

TIME: GMT plus 1 hour. Summer-time: May to September GMT plus 2 hours.

HOLIDAYS: Local and national holidays: New Year's Day (1st January); Liberation Day (25th April); Labour Day (1st May); Easter and day after Easter; Assumption B.V. Maria (15th August); Local Saints' Day (19th September); All Saints' Day (1st November); Immaculate Conception (8th December); Christmas Day (25th December); and 26th December.

DEVELOPMENTS: Over the three-year period (1975–1978) the port will be equipped with a container terminal. The facility will include: Quay of 650 m. Depth of water 12–15 m. (Bausan Quay). 2 anchorages West of Flavio Gioia Quay with a depth of water of 12 m. Container park of 35,000 sq. m. (S. Erasmo). A link with the National Railway Network. 2 cranes for 20 ft. and 40 ft. containers at Bausan Quay East and 2 cranes for 20 ft. containers at Bausan Quay West. A trans-European railway terminal operated by International Containers S.A. fitted with a Paceco-Vickers transtainer of 35 tons, lateral cranes of 35 tons and 7 tons, and fork-lift trucks.

AUTHORITY: Consorzio Autonomo del Porto di Napoli.

OLBIA Sardinia: 40.45 N. 09.31 E.

DOCUMENTS:
For Maritime Authority:
Arrival Report.
Crew List.
Passenger List.
Ship's Certificates, for sighting.
For Port Health:
Maritime Declaration of Health (2 copies).
Vaccination Certificates, for sighting.
For Customs:
List of Supplies and Engine Stores.
Cargo Manifest, enclosing Bills of Lading.
For Police:
Passenger List (2 copies).
Crew List (2 copies).
Shore Passes for all passengers and crew.

PILOTAGE: Pilots are requested by international code signals – Telegraphic address: Pilot – Olbia, at least 2 hours notice of arrival required. VHF of 15 Watt on pilot boat (Watch on Channel 16 – Working on Channels 6, 9, 12, 14) with service from 0500 hrs. till 0100 hrs. Pilot launch is wooden motor boat of 145 h.p. – speed 12 knots. Pilot boards 1 mile from lighthouse Isola Bocca. Vessels may anchor temporarily to await Pilot.

ANCHORAGE: In the roads of Golfo Aranci.

RESTRICTIONS: Between 0530 and 0630 hrs.; 2230 and 2330 hrs., kept free for entrance and exit of liners.

MAX. SIZE: Isola Bianca, max. draft 22 ft. Inner port, max. draft 20 ft.

HEALTH: Before arrival vessel to advise Agents if free pratique required, indicating state of health on board.

RADIO: The Port Authority listen on Channel 16 (VHF, range about 30 miles).

TUGS: 1 available, 1,050 h.p. service is optional, tug normally meets vessel in vicinity of Isola Bianca.

CRANES: 2 of 6 tons on rails in the inner port (at the Benedetto Brin Quay). 1 mobile of 15 tons.

STEVEDORES: Agents require ETA 24 hours before arrival in order to arrange gangs.

MEDICAL: Hospital facilities available. Vaccinations and inoculations can be done, except for yellow fever which must be done in Cagliari.

FRESH WATER: Available in inner port and Isola Bianca.

FUEL: Available only by barge, subject 2 to 3 days notice.

GANGWAY/DECK WATCHMEN: Service is optional.

OPENING/CLOSING HATCHES: Work is exclusively done by stevedores.

CUSTOMS ALLOWANCES: For first 48 hours, 50 grammes tobacco per person and 20 gm. for each successive day. Not permitted to take tobacco out of the docks. Reasonable amount wine/spirits allowed for normal consumption on board.

IDENTIFICATION CARDS: Shore passes required.

CONSULS: No local representatives.

AIRPORT: Olbia Airport is Olbia – Costa Esmeralda, 3 km. away. Regular services with Rome, Milan, Pisa, Bologna, and Nice (this last one in Summertime).

TIME: GMT plus 1 hour. Summertime GMT plus 2 hours from June to September.

HOLIDAYS: New Year's Day (1st January); Epiphany (6th January) St. Joseph (19th March); Liberation Day (25th April); Labour Day (1st May); Easter Monday, Ascension Day, Corpus Domini (variable date); Proclamation Day (2nd June); St. Peter and St. Paul (29th June); Assumption B. V. Maria (15th August); All Saints' Day (1st

November); Victory Day (4th November); Immaculate Conception (8th December); Christmas Day (25th December); Boxing Day (26th December).

Sundays – tariff plus 50%. Holidays – tariff plus 150%.

POLICE/AMBULANCE/FIRE: Police, 22081; Ambulance, 22394; Fire, 22222.

SHORE LEAVE: Allowed.

DEVELOPMENTS: Planned to dredge entrance to 10 m. depth.

AUTHORITY: Capitaneria di Porto.

ORISTANO BAY, Sardinia: 39.45 N. 08.30. E.

SHIPMASTERS REPORT:

Oristano Bay has many shallows, none marked with buoys. A good anchorage was obtained 2.5 miles from the port. The Bay is completely open to the West and with a S.W. to West wind the swell builds up. The perlite loading berth is a pier and a ship berths across the 'T' end of it, the ship being parallel to the beach. The berthing part itself is 120 ft. long and the loading chute can be raised to a height of 8 m. A vessel has to move on the pier for loading in different hatches, as the chute has a fixed base. I understand that although at the time there was hardly any swell in Bay, alongside there was considerable movement. The loading rate as quoted by the Agent is 500 t.p.h. Good communications were obtained with link calls on VHF through Cagliari Radio to the Agents. No answer was obtained on VHF to a Pilot or port service.

A new harbour is being built in the Bay as observed on the ship's radar. This consists of 2 breakwaters and a third breakwater extending at right angles across the entrance, with opening at both ends. In the Southern part of the Bay, there is a no anchoring and fishing area.

In the opinion of the Master the berth is not practical during the Winter months, as delays are caused by swell coming into the port. 1 vessel was at anchor for 3 days and sailed finally without loading.

PALERMO (Sicily): 38.07 N. 13.20 E. (See Plan Book)

DOCUMENTS:

6 Crew Lists.
6 Passenger Lists.
Provisions Manifest.
Manifest of Crew Personal Effects.
Cargo Manifest.
Arrival Report, completed on arrival.
Maritime Declaration of Health Certificate, completed on arrival.
Ship's Certificates including Italian Authority Dues.
Vaccination Certificates for sighting.

PILOTAGE: Compulsory for vessels over 499 gross tons. Pilot station keeps listening watch on VHF Channel 12. Pilot joins vessel 1 mile off port entrance. Pilot can be requested by International Code Signals. Pilot station and every Pilot equipped with walkie-talkie VHF set. In case of rough weather pilot boat will be in the bay and will lead ships through port entrance where Pilot will be able to board.

ANCHORAGE: It is advisable to use Pilot for anchoring in Palermo Bay.

RESTRICTIONS: No entry restrictions, but there is a daily ferry service to and from Naples arriving about 0700 hrs. and sailing at 2030 hrs. No vessel is allowed to leave or enter the port half an hour before arrival or sailing of this vessel.

MAX. SIZE: Draft max. is up to 44 ft. (13.40 m.) according to the quay. Tankers up to 15 m. draft.

HEALTH: Free pratique may be requested by radio to "Sanimare", Palermo, between 12 to 6 hours before arrival advising vessel's name, nationality, last port, number of passengers and crew, and state of health on board. Pratique is automatic for vessels coming from ports in Italy, U.K., France, Belgium, Holland, W. Germany and Greece.

RADIO: Naples Radio, call sign IQH, Roma Radio, call sign IAI, Cagliari Radio, call sign IDC. Palermo Radio, call sign IPP.

VHF: Port Captain listens on Channel 16 from 0800 – 2000 hrs.

TUGS: 4 tugs are available with up to 800 horse power. Tugs normally join vessel in the Bay. Ship's lines are used.

BERTHING:

Pier	*Length*	*Maximum draft* ft.	m.
Puntone	400	44.0	13.4
S. Lucia – South side	150	37.5	11.4
Crispi 1	115	37.5	11.4
Piave – North side	325	37.5	11.4
Piave – East side	85	37.5	11.4
Piave – South side	325	37.5	11.4
Crispi 2	110	37.5	11.4
V. Veneto – North side	325	37.5	11.4
V. Veneto – South side	325	27.5	8.4
Crispi 3	115	24.5	7.4
Sammuzzo	350	26.0	7.9
Molo South/North end	380	21.0	6.4

There are 6 roll-on/roll-off terminals and others are projected.

S. Lucia. Max. draft 27 ft. and used for discharge of timber, general, iron, steel and grain.

CONTAINER HANDLING FACILITIES: One 35 ton container crane with outreach of 25 m. height of spreader from quay 15 m. One 42 ton container crane with outreach of 35 m. height of spreader from quay 27 m. 1 straddle carrier (Belotti) self-propelled fitted with spreader; 2 fork-lifts (Hyster-Belotti) self-propelled fitted with spreader; tractors, trailers, fork lift-trucks,etc.

BULK HANDLING FACILITIES: There are 31 silos at Piave Pier with a total capacity of 27,000 tons. Discharge rate 150 t.p.h.

Wine: 11 storage tanks with total capacity of 1,500 cu.m.

Acid Fats: 8 storage tanks with total capacity of 3,000 tons.

CRANES: 4 electric cranes with capacity of 15 tons, max. outreach 25 m. and min. 7 m.

10 mobile cranes with capacities from 1–20 metric tons.

STEVEDORES: Gangs arranged through Agent. To be ordered before 0800 hrs. to start work in the morning, and not later than 1100 hrs. to start work at 1300 hrs.

Port Labour Capacity: (quantities of goods loaded/unloaded in 8 hours daily work employing all stevedores available).

Bulk cargo – 1,700 tons.
General cargo – 700 tons.
Containers – 100.
Full loaded trucks and vans carried by roll-on/roll-off ships – 240.

MEDICAL: Assistance will be given upon request. English-speaking doctors available.

TANKERS:

Oil Products and Crude Oil: Agip. Max. length 185 m., draft 32 ft., 25,000 d.w.t. Tankers drop anchors and are tied up at 2 buoys astern. Discharge rate 200–400 t.p.h.

Islom. Max. length 260 m., draft 40 ft., 96,000 d.w.t. Vessels are berthed alongside. North breakwater is used for loading and discharging fuel oil at discharging rate of 400 t.p.h.

Esso. Max. draft 15 m., no limitation for length. Vessel drops anchor and ties up at 2 buoys by stern. Discharging rate 600–700 t.p.h.

DENSITY: 1025.

FRESH WATER: Available at any quay by hoses or barges. By hose at 25 t.p.h., by barge 45 t.p.h.

FUEL: Fuel oil, gas oil and marine diesel available at the quays and by barge.

GANGWAY/DECK WATCHMEN: Not compulsory; usually number of watchmen required depends upon the Master.

OPENING/CLOSING HATCHES: Crew usually carry out this operation.

CUSTOMS ALLOWANCES: 40 cigarettes and one opened bottle wine/spirits per man.

IDENTIFICATION CARDS: Shore passes given by local police.

TIME: GMT plus one hour. Summertime: May to September, GMT plus 2 hours.

CONSULS: Belgium, Holland, France, Germany, Libya, Norway, Panama, Portugal, Spain, U.K., United States.

REPAIRS: Any type of repairs undertaken. Facilities are provided by Cantiari Navali Riuniti, and the shipyard employs over 5,000 workmen. There are four building slips, two of which can take vessels of 250 m. length. The slipways are serviced by cranes of up to 45 tons capacity, and which allow handling of prefabricated units up to 70 tons weight. There is a plate shop capable of machining about 80 tons a day, and which is equipped with all the latest machine, drilling and welding units. The engineering works are also equipped with the latest types of machinery enabling total dismantling and reassembly of engines.

DRY DOCKS: Floating dock, length 285 m., breadth 46 m. Suitable for up to 150,000 d.w.t.

Floating dock, length 194 m., breadth 30 m. Suitable for up to 36,000 d.w.t.

Graving dock, length 172 m. breadth 28 m. Suitable for up to 30,000 d.w.t.

Also see "Developments".

AIRPORT: Distance from Punta Raise Airport is about 20 km. Airport served by regular services.

REPATRIATION: Good facilities exist.

HOLIDAYS: New Year's Day (1st January); Epiphany (6th January); St. Joseph (19th March); Liberation Day (25th April); Labour Day (1st May); Easter Monday; Ascension Day; Corpus Domini; Proclamation Day (2nd June); St. Peter and St. Paul (29th June); Assumption B.V. Maria (15th August); All Saints' Day (1st November); Victory Day (4th November); Immaculate Conception (8th December); Christmas Day (25th December); Holiday (26th December).

Cargo work can be arranged on the above days.

POLICE/AMBULANCE/FIRE: Police, 233333; Ambulance, 231166; Fire, 212222.

TELEPHONES: Available if required, but only for local use.

SHORE LEAVE: Allowed.

DEVELOPMENTS: A graving dock suitable for up to 500,000 d.w.t. is under construction. Length of the new dock will be about 384 m. and breadth about 60 m. Also 1 drydock under construction for vessels up to 160,000 tons.

AUTHORITY: Capitaneria di Porto, Ente Autonomo del Porto.

PIOMBINO: 42.56 N. 10.33 E.

PORT LIMITS: Within one mile of Breakwater light.

DOCUMENTS:

3 copies of Crew List.
3 copies List of Passengers in Transit or Disembarking.
1 Customs List, including ship and crew articles (Master is responsible for any excess, less or more).
1 copy of Manifest and B/L of Cargo Discharging.
1 copy of Manifest for Cargo in Transit.

PILOTAGE: ETA to Agent in local time (GMT plus one hour). Summer-time May to September (GMT plus two hours).

Pilots embark E.S.E. from breakwater light, distance 1 mile or less according to weather conditions. Pilotage usually available at greater distance on request of ship or Agent. Being an open road, care should be given to provide shelter to Pilot embarking/disembarking facilities, especially in Southerly winds or a swell.

Pilot ladder according to Convention Safety of Life at Sea, and EMPA recommendations.

Southerly gales may prevent Pilot from embarking or even from approaching the ship; in this case pilot boat may guide limited size vessels to sheltered water and then embark Pilot (signals by lamp or flags "UF").

Pilots VHF will be activated in near future.

ANCHORAGE: Outside the harbour leaving entrance of dredged channel clear and ample sea room for intense traffic of car ferries to and from Island of Elba.

Pilot not compulsory, but available day and night on request of ship or Agent.

RESTRICTIONS: Berthing of ships over 35,000 d.w.t. unadvisable in darkness. Berthing may be restricted by Southerly gales also for smaller vessels. No restrictions on sailing but may be necessary to disembark Pilot at Portoferraio (Island of Elba). Considerable swell in the harbour during gales.

MAX. SIZE: Max. draft 39 ft., length 260 m., no breadth restriction. Can accommodate vessels up to 50,000 d.w.t.

HEALTH: Free pratique automatic for vessels coming from Continent, "Q" flag not to be flown on entering. From other countries, including Spain and Portugal, usual procedure applies. Not coming from Continent it is possible to request free pratique by radio to "Sanimare", Piombino, between 12 to 6 hours before arrival.

RADIO: Civitavecchia or Livorno Radio.

BERTHING: "Acciaierie di Piombino" (ex-Italsider) pier equipped for quick discharging of ore, coal, scrap, etc. – Berth No. 4 depth 39 ft. Berth No. 3 depth 35 ft. 6 in. Other commercial berths, max. depth 29 ft., equipped with mobile crane 10 tons. One berth (21 ft.) with roll-on/roll-off facilities.

STEVEDORES: To enable Agent to order gangs, it is important to radio accurate ETA. Latest time to order gangs: shift 0600–1400 hrs., 1700 hrs. day before, shift 2200–0600, 1700 hrs. same day, shift 1400–2200 hrs., 1100 hrs. same day. Failure to give precise ETA may result in ship losing 12–24 hours, and the cost of the gang not employed, about 70.000 lire.

MEDICAL: Doctor and dentist can attend sick crew. For yellow fever and smallpox vaccination doctor comes from Livorno.

FRESH WATER: Available at any pier, by pipe-line.

FUEL: Available by barge from Livorno.

OPENING/CLOSING HATCHES: Normally carried out by crew (if stevedores, extra charge).

CERTIFICATES:
- Certificate of Registry.
- Load Line.
- Safety Equipment.
- Radio Certificate.
- Deratisation Certificate.

CONSULS: No Consuls.

REPAIRS: Small repairs only undertaken.

REPATRIATION: It is possible to arrange repatriation.

HOLIDAYS: Cargo work can be arranged on all official holidays.

POLICE/AMBULANCE/FIRE: Police 31111 or 32222; Ambulance 36022; Fire 33333; Emergency call (all services) 113.

SHORE LEAVE: Allowed.

AUTHORITY: Il Comandante, Capitano di Porto.

PORTO EMPEDOCLE: 37.17 N. 13.32 E.

BERTHING: Two quays with max. draft 21 ft., and one pier max. draft about 28 ft. Berths used for loading salt, fertilisers and generals, and for discharging bulk phosphate. Salt is discharged at rate of about 250 tons per hatch/day using ship's gear, and about 1,000 tons per day ex-silos.

PORTO TORRES (Sassari): 40.51 N. 08.24 E.

DOCUMENTS:
- 4 Crew Lists.
- 1 Passenger List.
- 1 Maritime Health Declaration.
- 1 Arrival Report.
- 1 Crew Declaration.

PILOTAGE: International Code Signals are used to call Pilot. Pilot station telegraphic address, Corpo Piloti Porto Torres, tel. P. Torres 514936. The pilot boats carry international pilot signals. The Pilot normally boards about 1 mile from port entrance. On request, vessel can be boarded 3 miles off port entrance. Also see VHF.

ANCHORAGE: About 1 mile from the green light on head of West Mole in depths of 25 m.

RESTRICTIONS: The oil terminal is exposed to winds and swell from N.W. to N.E. Heavy N.E. swell may delay berthing of larger vessels. Vessels should be ready to leave the berth if necessary due to adverse weather conditions.

MAX. SIZE: Inner port: length 120 m., draft 7 m.; Outer port: length 150 m., draft 8 m.; West Mole: length 150 m., draft 8–10 m.

S.I.R. Terminal: Pier A, length no limit, draft 9 m.; Pier B, length no limit, draft 12 m.; Pier C, length no limit, draft 15 m.; Pier E, length no limit, draft 8 m.

S.B.M. mooring: up to 300,000 tons.

HEALTH: Pratique is given by the Port Medical Officer who boards all vessels coming from foreign ports. No Radio pratique at present. Pratique not required for vessels arriving from Common Market countries.

RADIO: Coastal radio station, Porto Torres Radio P.T., call sign "IZN", operating on 2182 kHz. A continuous service.

VHF: Pilots work on Channels 12 and 16. Launch service from anchorage to Oil berths work on Channel 6. It is also possible to call Porto Torres Radio on VHF Channel 16 (Calling and Safety), with continuous service on Channels 25, 26 and 27.

Captain of the Port on VHF Channels 16, 12, and 9 and 14 from 0800 – 2000 hrs.

TUGS: Join vessel about 0.5 mile from port or from S.I.R. Piers. Ship's lines normally used. 4 tugs available.

BERTHING: Tankers are only permitted to berth between sunrise and sunset, but may unberth at any time.

Dry-cargo vessels may enter at any time.

There are two ports, viz. New Port and Old Port. The New Port is comprised of the S.I.R. jetty, and the Old Port is that area bounded by the East and West breakwater moles, within which are the Inner and Outer harbours. The Inner harbour is composed of the general cargo wharves which have in service electrical cranes up to 9 tons capacity, and a heavy lift gantry crane of 30 tons capacity. The Outer harbour has oil berths at the West Mole, and general cargo berths at the East Mole in depths of up to 8.23 m.

STEVEDORES: There are two ordering times each day. The first at 0800 hrs. and the second at 1330 hrs. It is possible to order gangs outside normal working hours through ship's Agents.

TANKERS: S.B.M. located about 1.7 miles N.N.W. of S.I.R. Terminal in approx. position 40.52.5 N. 08.21.5 E. Suitable for up to 300,000 d.w.t.

New Port, consisting of the S.I.R. jetty with berths A, B, C and E and depths of water varying to allow ship drafts of between 9 and 15 m.

There are two lines of 20 in. and 10 in. diameter for deballasting ashore.

Old Port, the West Mole which forms the seaward limit of the (Outer) port has tanker berths in a depth of 7 m.

MEDICAL: All facilities available. Nearest hospital located at Sassari, 18 km. away.

DENSITY: Salt water.

FRESH WATER: Can be supplied in limited quantities to vessels in port and in the roads. All berths are fitted with fresh-water connections, but supply is unreliable due scarcity. Advance notice is required for deliveries by barge or from tugs.

FUEL: All grades available by pipe-line at S.I.R. piers. Elsewhere, can be supplied by barge, subject advance notice of 12 hours.

GANGWAY/DECK WATCHMEN: Authorised shore service available.

OPENING/CLOSING HATCHES: Normally done by crew, can be done by stevedores on request.

CUSTOMS ALLOWANCES: 40 grammes tobacco per man. Normal daily consumption wine/spirits allowed.

IDENTIFICATION CARDS: Not required.

CONSULS: No local consular representation.

REPAIRS: Only minor repairs can be effected locally.

REPATRIATION: Can be arranged through Agents.

AIRPORT: Nearest at Alghero-Fertilia, 34 km. away. Daily flights to main Italian cities.

TIME: GMT plus 1 hour. Summer-time, clocks advanced 1 hour between 24th May and 21st October.

HOLIDAYS: New Year's Day (1st January); Epiphany (6th January); St. Joseph (19th March); Liberation Day (25th April); Labour Day (1st May); Patron Saint (22nd May); Easter Day, Ascension Day, Corpus Domini (variable date); Proclamation Day (2nd June); St. Peter and St. Paul (29th June); Assumption B. V. Maria (15th August); All Saints' Day (1st November); Victory Day (4th November); Immaculate Conception (8th December); Christmas Day (25th December); Boxing Day (26th December).

POLICE/FIRE/AMBULANCE: Police tel. 514888; Fire, 31421; Ambulance, 54973. Sassari Fire Brigade, tel. 270521; Sassari Ambulance, tel. 242124.

SHORE LEAVE: Allowed. Shore passes are issued by Immigration.

AUTHORITY: Capitaneria di Porto Torres.

PORTO VESME (Sardinia): 39.12 N. 08.24 E.

DOCUMENTS: See "Genoa".

TUGS: Vessels normally require two tugs. One tug is available from Porto Vesme, and the second usually comes from Cagliari at a charge of about Lire 800.000 per trip plus Lire 40.000 per hour from two hours after arrival at Porto Vesme.

BERTHING: All bauxite cargoes are discharged at Eurallumina Quay, including all cargoes discharged for account Comalco. This is a private installation, operating with own personnel on a 24-hour shift basis. Out-turns may reach 10/15,000 tons per day. Depth of water on approach to Eurallumina reported to be 13 m., and permitted draft alongside the quay is 10.97 m. (36 ft.).

FUEL: Not available.

FRESH WATER: Available, but in short supply. Preferably vessels should arrive with sufficient water on board in order to avoid the heavy charges incurred in deliveries by tank-lorries.

SHIPMASTER'S REPORT: 1975.

Harbour: The harbour is protected by two moles between which there is a wharf. A channel marked by buoys leads to the entrance.

Documents: On arrival the following documents are required.

Declaration of Health.
2 Crew Lists.
1 Copy of last Port Clearance.
1 Copy Vaccination List.
2 Store Lists.
2 Personal Effects Lists.
1 Valid Derat Certificate.
All other ship's documents.

Radio Pratique: Unavailable.

Pilotage: For ships arriving the Pilot boards at 39.14 N. 08.19 E., but in severe North-Easterly gales the Pilot will board in Palmas Bay, position 39.00 N., 08.30 E. When leaving Port the Pilot leaves the ship abeam of Ghingetta Is., 3 cables off, position 39.11.05 N., 08.22.25 E. There is no Pilot V/L, the Pilot boards from a tug.

Radio: Cagliari (IDC). No VHF service for pilotage.

Tugs: Two permanent tugs of 1,750 h.p. are operating and other tugs are available from Cagliari when necessary, and advising four days before ship's ETA.

Mooring Boat: Available.

Depths of Water:

In the Channel	14 m.
Eurallumina Quay	12 m.
Alsar Pier	8.5 m.
Trade Quay	8.5 m.

Berthings: Eurallumina Quay (unloading point of bauxite vessels). Length 442 m. Height on surface of water 3.6 m. Large rubber sprung fenders 150 ft. apart are fixed to the quay. Double bollards 150 ft. apart.

Vessels using this quay usually berth starboard side to using the port anchor which is let go well off the berth.

Bauxite Discharging Rate: 10,000 m. tons/day. Discharging by grab.

Fresh Water: Available at the Trade Quay by tank cars. At Eurallumina Quay available at 15 cu. m./hr. (Boiler Water only). No fresh water available at Alsar Pier.

Bunkers: Available by barge from Sarroch, about 70 miles from Porto Vesme.

Repairs: Limited minor repairs only and giving notice by radio. For Radio and Radar available at Cagliari.

Ship Chandler: Available advising Agent.

Consuls: No foreign representation.

QUILIANO TERMINAL: 44.17 N. 08.28 E.

(See Plan Book)

LOCATION: Terminal is located in Vado Ligure Bay in approx. Lat. 44° 16′ 48″ N., Long. 08° 27′ 42″ E. between Savona Harbour and Capo Vado.

DOCUMENTS:

2 copies Store List.
2 copies Curios List.
8 copies Crew List.
4 copies Passenger List.
Clearance, not required.
1 copy Cargo Manifest.
Health Declaration. International Health Form to be filled out by Master on arrival.

Consignee Papers:

Bills of Lading (original and copy).
Certificate of Origin (original and copy).
Ullages report at the loading port.

PILOTAGE: Also see "Mooring".

Pilotage is compulsory. Vessels proceeding to the terminal must call off Savona Harbour to pick up Pilot.

Pilot station is located one mile off Savona Harbour breakwater in position approx. Lat. 44° 19′ 00″ N., Long. 08° 31′ 24″ E. and maintains VHF radio-telephone service (Channel 13).

Vessels are requested to have a proper pilot ladder securely rigged and long enough to reach the pilot launch; during night-time, adequate light must be rigged overboard for the Pilot to approach the side of the vessel and safely climb the ladder.

Vessels partially loaded must have the pilot ladder rigged in conjunction with the accommodation ladder.

When the vessel is berthed, the Port Authorities require the accommodation ladder on the starboard side.

ANCHORAGE: For vessels awaiting berth, the anchorage area is off Savona Harbour breakwater, or in the area East of berth in position approx. Lat. 44° 17′ 00″ N., Long. 08° 28′ 05″ E.

MAX. SIZE: The berth is established for a 70 ft. draft vessel, with min. keel clearance of 15 ft., making the safe manoeuvring depth 85 ft. (26 m.).

HEALTH: Master to request free pratique by radio 24 hours prior arrival to "Sanimare Savona".

RADIO/VHF:

Master to Radio "Sarpom Quiliano"

AAA	Blading quantity in long tons.
BBB	Slops, quantity water percentage, tank number.
CCC	ETA Quiliano upon departure last port.
DDD	Any ETA change exceeding 12 hours.
EEE	ETA Quiliano 72–24 hours prior arrival.
FFF	Draft of arrival at berth.

Ship-to-shore communications

Ship-to-shore communications, while the ship is berthed will be by portable VHF radio units used by Sarpom Marine Terminal Supervisor only. The use of the ship's radio station (except VHF set) and/or battery charging equipment is prohibited for safety reasons during cargo-ballast transfer operations. In event of normal ship-to-shore communications failure, an emergency system will be operated.

Free pratique. See "Health".

Radio Message

Local Agent will transmit the following standard message to all inbound vessels:

Standard Message No. 1 Sarpom Quiliano
Master ....

Please advise ETA draft other requirements stop please urgently inform:

AAA	Have two 16 in. ASA connections ready on standard manifolds all other flanges to be blanked and fully bolted stop if 16 in. not available advise size manifold connection.
BBB	Have boom hoisted on starboard side able to work abreast of main cargo manifolds certified lifting capacity 10 tons.
CCC	Vessel will be moored at a 7 buoys SBB using both bow anchors with . . . . shackles each side stop advise details/availability your mooring system stop mooring lines/wires of 150 fathoms each are required stop terminal preventer wires may be required.
DDD	Accommodation ladder to be ready on starboard side on arrival stop have pilot ladder ready on stbd side in connection with the accommodation ladder.
EEE	During entire stay at berth engine to be always on readiness and steam on deck to be kept open.
FFF	Have ullages, cargo temperatures and water measured and ready before arrival.
GGG	Advise main cargo pumps total water rate capacity stop failing to answer above details may result in operational delays accountable to vessel.

Important that a reply to this message be sent soonest after receipt.

TUGS: Tugs are generally stationed in Savona Harbour. In view of required time to reach the Terminal Area (about 20 minutes time in good weather conditions) sufficient notice should be given.

The principal characteristics of tugs are:

Luigi Noli: motor, 3000 h.p. – 50 tons bollard pull (Korte nozzle). *Fire equipment:* Equipped with "Sourbel" fire-fighting articulated arms. 1 monitor fore mast, 23 m. above sea level; 2 monitors main mast, 16 m. above sea level, water/foam range 120/90 m.

Carmelo Noli: Motor, 1,700 h.p. – 20 tons bollard pull. 1 monitor fore mast – 12 m. above sea level. 2 monitors main mast – 9 m. above sea level. Water/foam range 90/70 m.

Giuseppe Piaggio: Motor, 1,600 h.p. – 17 tons bollard pull. 2 monitors main mast – 9 m. above sea level. Water/foam range 90/70 m.

Capo Vado: Motor, 1,250 h.p. – 15 tons bollard pull. 2 monitors main mast – 9 m. above sea level. Water/foam.

Leon Pancaldo: Motor, 808 h.p. – 10 tons bollard pull. No monitors – fire hoses only.

Priamar: Motor, 650 h.p. – 9 tons bollard pull. No monitors – fire hoses only.

Riviera: Motor, no monitors – fire hoses only.

MOORING: The vessel will be boarded before mooring operations by a Sarpom Marine Terminal Supervisor (S.M.T.S.) who is an experienced captain. He will remain on board up to the time the harbour Pilot boards the vessel for unmooring operations and he will also act as co-ordinator of all ship/shore operations, providing local advice to the Master in any emergency that may arise.

Responsibility for the safe conduct of operations on board while in berth or in the area of Terminal rests with the Master, as solely responsible on behalf of the Owners of the vessel.

Vessels will be boarded by the harbour Pilot off Savona Harbour breakwater or at anchorage. All manoeuvring of ships proceeding to the Terminal and within the Terminal area will be done in accordance with the harbour Pilot advices. Vessels will proceed subsequently to Vado Bay with a course parallel to the coast, about 1.2 miles from shore, up to the terminal area.

A starboard turn will be taken, steering on the "approaching range line", leading to the buoys field. Another range line, crossing with above line, marks the position where the starboard anchor should be dropped. With the assistance of 4 to 5 tugs the vessel then backs into the berth.

The position of anchors is assumed for vessels of 980 ft. LOA and 13 shackles in the water. The Pilot according to current information can also do anticlockwise manoeuvring instead of above clockwise, in this case the first anchor to be dropped will be the port anchor.

It is recommended that at least the following number of shackles in the water should be used according to size of vessel:

(1) VLCC's above 140,000 d.w.t.	13
(2) Vessels 80 to 140,000 d.w.t.	11
(3) Vessels 50 to 80,000 d.w.t.	9

According to existing local weather conditions the first line to be sent out is generally on buoy N.7 or 6 (port side of vessel). The sequence of mooring operations will take place as suggested by harbour Pilot.

In expected or bad weather conditions, preventer wires will be picked up.

For vessels in the range of 50,000–90,000 d.w.t., according to existing and foreseen weather conditions and other factors, only five buoys instead of seven will be used.

Vessels must be moored to the entire satisfaction of the Pilot and Sarpom Marine Terminal Supervisor and must be ready at all times to put out more lines, to take in preventer wires using messenger lines, or to adjust lines or leave the berth as required by S.M.T.S. due to any change in the weather.

The Master of the vessel shall notify the Pilot of any special conditions, difficulties or peculiarities, such as defective equipment lines or gear, which might impose special hazards in connection with handling, mooring or discharging the vessel.

It is required that vessels test steering gear, engine room telegraph, whistle and all navigational equipment before any manoeuvre to or from the berth. The Pilot will decline to moor vessels if they are not equipped with satisfactory mooring equipment, lines, gear, etc.

The mooring boat has the following characteristics: LOA 12 m. – beam 4.20 m. – displacement 17 tons. Motor Diesel *Deutz* 150 h.p., can be overpowered up to 200 h.p.

A successful test of the boat power was carried out by towing 250 m. of two 38 mm. dia. wires at the same time.

N.B. Being an open roadstead, vessels must keep engines on stand-by during their stay in the moorings. No repairs to main engine may be undertaken in berth. Steam must be kept on deck in case an adjustment to anchor cables or mooring lines is found necessary.

The vessel's personnel are responsible for the safety of the vessel and must take all necessary precautions, whether or not so advised by the Pilot or S.M.T.S., having in mind the hazards of the operations because of the product being discharged, weather conditions and any other circumstances requiring special care or caution.

While a vessel is moored, all the vessel's personnel and vessel's operations must comply or be in accord with the Safety Rules as per form 1–49 Mar–B and others handed to Master on arrival, to ensure as far as possible the safety of the ship as well as the properties of Terminal. Unsatisfactory conditions will be reported to Sarpom Marine Terminal Supervisor who is empowered to reject the ship for future calls unless the reported deficiencies have been remedied.

Note: If in the opinion of the harbour Pilot and/or Sarpom Marine Terminal Supervisor the vessel is not equipped with adequate mooring facilities, lines or gears he will so inform the ship's Master and in such event the ship shall not be brought into the mooring until facilities, lines or gear, are deemed satisfactory.

BERTH: The sea bed at the berth is firm sand overlain by 1 to 2 m. of mud.

The berth is a conventional buoy mooring consisting of seven Langmar buoys designed for a 125 short ton load. Each buoy is equipped with a 40 mm. diameter preventer wire. Vessel is berthed with two anchors ahead and seven mooring lines to buoys round the stern. Moored vessels have their bow seaward heading S.E., 155° true.

As the mooring buoys are at distances from 500 to 650 ft. away when the ship is in position, vessels should have ropes of 200 fathoms ready for running out on each side of the after deck to warp ship into position. Where vessels are not so equipped, two ropes of 150 fathoms (or of such a length as to have the eye splice on board when in position), should be married together and flaked out on deck clear of all obstructions and ready for running.

Vessels not equipped with wire winches should have at least 15 mooring lines aft with diameter appropriate for the size of the vessel and a min. length of 150 fathoms with lashings ready for marrying one rope to another for running out. Combinations of wire synthetic lines are acceptable on the basis that 2 synthetic lines replace 1 wire.

Speed of running out and warping are often of vital importance when berthing, and experience has proved that the smaller diameter synthetic ropes of equivalent strength not only improve mooring time but often make mooring possible when the larger ropes fail. Max. circumference of such ropes should be 10 in.

Mooring wires on ship's winches are favoured at this terminal but it is recommended that the wire be not less than 1.625 in. diameter and at least 150 fathoms long, preferably 200 fathoms. Such winches must be solidly locked when in moorings; the tension feature is not acceptable. It is also recommended that the wire be secured on the drum in such a manner that it can be slipped without endangering personnel.

Where nylon tails are used, they should be spliced on the wire round a thimble.

When slipping wire has been found necessary, the mooring company launch will make every effort to recover and return it to the vessel.

Chain stoppers must be ready both sides of vessel and aft.

DISCHARGING: Ships will discharge through 2 strings of hoses, i.e.:

String No. 1 9 lengths 25 ft.×20 in. dia.
2 lengths 25 ft.×16 in. dia.
1 length 30 ft.×16 in. dia.

String No. 2 10 lengths 25 ft.×20 in. dia.
2 lengths 25 ft.×16 in. dia.
1 length 30 ft.×16 in. dia.

The weight to be lifted on each string is about 9 tons: they are invariably taken up on the starboard side. Both headers are equipped with fast uncoupling devices.

The submarine line connected by manifold to the above strings consists of 2 lines (one 32 in. dia. one 36 in. dia.) of about 3.470 m. length reaching the shore installations (Sarpom Depot) which has, at present, the capacity of 387.500 cu.m.

The max. discharging rate allowed is 13,000 cu.m/hr.= 81,600 bbls/hr. with a max. pressure at ship's rail of 150 p.s.i.=10.6 kg/sq. cm.

Raising, connecting, disconnecting and lowering of the hoses will be performed by shore personnel (7 men), who will remain on board throughout discharging operations, using a special motor-boat chartered by Sarpom.

The boat is fitted with anti-oil-pollution equipment. Vessel's crew are required to assist shore personnel handling the boom winch and to carefully inspect their hose boom equipment before arrival.

It is recommended that vessels send max. flow possible with due regard to safety, in order to expedite turn-around time, as well as to provide ballasting as quickly as possible.

N.B. The Sarpom Terminal maintains a vigorous tanker discharging safety programme. S.M.T.S. is authorised to suspend discharging operations in the event of any of the safety rules not being observed, or if any other danger is believed to exist. Tankers are expected to follow all safety regulations generally accepted and practised in the marine transport industry (IOTTSG Safety Guide).

The S.M.T.S. will advise the Cargo Officer or a responsible officer in due time when the switching of shore tanks, changes in discharging rates, etc. are required by the shore installation operations and for any emergency stop.

BALLAST: Vessels provided with segregated ballast will start ballasting as soon as possible during discharge operations. All vessels that are able to handle cargo and ballast simultaneously will be authorised to do so, after S.M.T.S. is satisfied that no sea pollution or cargo contamination might occur.

All efforts must be made to avoid the vessel remaining in completely light condition. Should a vessel neither be fitted with segregated ballast nor be able to simultaneously handle cargo ballast, S.M.T.S. in agreement with the Master may ask the vessel to stop discharge operations and start ballasting, after having inspected the tanks involved.

Ballast operations after completion of discharge must be reduced to the minimum required for safe handling of the vessel out of berth, which in fair weather conditions can be: propeller submerged and vessel trimmed 10 ft. by the stern. Ballast operation can continue at reduced speed during unmooring.

While the vessel is ballasting the S.M.T.S. in agreement with the Master will start singling-up by letting go all preventer wires and any other additional mooring lines not strictly required for a safe mooring. This, of course, taking in due consideration all weather and current conditions.

WEATHER: The bay, although sheltered from the strongest winds blowing from the fourth quadrant by high mountains coming down close to the coast, is subject to strong wind gusts from this quadrant, and the relative wind direction varies considerably in different parts of the bay at one time due to irregularities of the coastal heights.

The bay is open to Southerly winds and seas, and it is from this direction that seas and swells caused by strong wind between S.E. and South may interrupt marine operations. Delays in this area are mainly due to the impossibility of mooring a vessel under certain weather conditions than to withstand elements once she is moored. The berth current is part of the general offshore current stream and is not wind blown or tidal; its predominant direction is toward the S.W. and the maximum speed is 0.8–1 knots; generally currents do not exceed 0.5–0.6 knots. The faster currents are likely to occur more frequently during the Winter period; occasionally they reverse and set N.W. with a reduced velocity.

Tide is negligible and fog is rare.

In general, weather in the bay is seasonal. From May to October it is very good. The worst period is from October to December when winds and seas from South cause the maximum number of port closures.

From December to May the strongest winds are experienced from third and fourth quadrants but sea is usually smooth.

12 and 24 hour weather forecast data is available on request on a round-the-clock basis at the Terminal Office. In addition the Office is provided with "Murfax" type continuous long-range weather recording data, waverider receiver, and anemometer.

Broadcast weather reports for Mar Ligure, North Tirreno and Corsica are prepared by Navy Dept. of La Spezia and Air Force Weather Buréau. For Mar Ligure, they refer to Capo Mele (West of Vado Bay). Radiotelephone information concerning weather is also given on 2182 kc/sec. (Genova Radio Station). Weather reports transmitted on 1722 kc/sec. at 0135–0735–1935 hrs. GMT.

Weather forecast covering the following 12 hours is transmitted at 0135 hrs. and 1335 hrs. GMT.

VHF-weather information can be received through Genova Radio Station on Channel 25 at same periods as for radiotelephone.

Special Gale Reports:

Wireless: After 15/18 min. and 45/48 min. every hour on 500/487 kc/sec.

VHF: On Channels 16 and 25 at same times as above.

SIP (Telephone) – Genoa Weather Report, prepared by Air Force Dept. at Genoa Airport, is based on the Genoa Radio information plus local information received by planes or vessels along the coast from Capo Mele to La Spezia. The report is inserted on a tape recorder and it is amended according to latest information received.

This report can be received by telephone by simply dialling 010-5605 at the following times:

from 31/5 to 26/9 at 0600–0900–1200 hrs. (forecast validity up to 2400 hrs. same day)
at 1800–2000–2400 hrs. (forecast validity up to 0600 hrs. following day);
from 27/9 to 30/5 at 0600–0800–1400 hrs. (forecast validity up to 2400 hrs. same day)
at 2000–2400 hrs. (forecast validity up to 0600 hrs. following day).

In case of necessity the Air Force Weather Bureau can be called by 'phone (010-420341 ext. 275) at any time of the day or night, to obtain additional information about developments of the exisiting situation and forecasts.

FRESH WATER: Fresh water is supplied at the berth, with no limitation, through a 3 in. flexible hose (international flange) at rate of about 60 t.p.h.

FUEL: Bunkers are supplied by barge which moors portside alongside the vessel. Bunker requirement must be radioed to local Agent at least 48 hours in advance. For vessels expecting to arrive on Saturday or Sunday, the requirement must be forwarded not later than Thursday afternoon.

CUSTOMS ALLOWANCES: Present regulations allow each seaman to retain in his possession a max. of 40 cigarettes or the equivalent of tobacco or cigars, and 1 open bottle of spirits. The balance of all smoking items and spirits must be collected, listed and locked, and included in the Stores List.

MEDICAL: Doctors and hospital facilities are available at Savona.

CONSULS: Consulates for most nations maintain offices in Genoa (about 50 km. from Savona).

REPAIRS: Repair shops for minor repairs are available. For electronic equipment repairs, notice should be sent to the local Agent in due time.

SHORE LEAVE: Launches are sailing from Chevron Pier (located about 1 mile North of berth) and keep regular connection with tankers berthed at Sarpom's berth.

During bad weather the service is performed sailing from Porto Vado.

Sufficient personnel must be aboard at all times for letting go lines so that the vessel can clear the berth whenever required.

AGENCY: Sarpom does not perform any vessel agency functions. Owners of vessels calling at Sarpom Terminal must arrange their own ship's Agent.

AUTHORITY: Port Captain.

RAVENNA: 44.25 N. 12.12 E. (See Plan Book)

DOCUMENTS:

For Maritime Authority:
Ship Safety Certificates.
3 Crew Lists.
3 Passenger Lists.
For Customs:
1 Crew List.
1 Passenger List.
Cargo Manifest.
Bills of Lading.
1 Provisions List.
1 Customs Declaration of each Crew member.
For Maritime Health:
1 Crew List.
1 Passenger List.
Derat Certificate or Exemption.
Maritime Health Declaration.
For Police:
1 Crew List.
1 Passenger List.

PILOTAGE: Ordered by Agent in advance. Contact by radio telephone: Nos. 430453 and 430204 during office hours. Cables to Piloti del Porto, Marina di Ravenna. Pilot station and both pilot boats equipped with VHF, Channels 16, 9, 6 and 12. Pilot is embarked not less than 1 mile from head of breakwater. Vessel awaiting Pilot may anchor 1.5 miles from breakwater head. This anchorage is not secure in bad weather. Vessel bound for SAROM installation, embark Pilot at least 0.5 mile from the berths. Pilot launches have black hull with white band, white superstructure, 10 or 14 m. in length.

ANCHORAGE: Anchorage prohibited in vicinity of submarine pipelines and cables. Vessels waiting for a berth may anchor at a distance more than 1.5 miles from the outer breakwater head according to their draft and subject to weather conditons.

RESTRICTIONS: Berthing day and night from entrance to San Vitale Basin. Inner port daylight berthing only. The channel to the inner port is navigable one way only. Traffic signals are displayed to indicate when channel closed to incoming vessels.

MAX. SIZE: *Inner Port*, draft limited from 17 ft. to 17 ft. 6 in. depending on vessel's beam.

San Vitale, max. draft 28 ft. allowed from port entrance to San Vitale Basin.

Sarom (Oil Platform), length not limited, max. draft 36 ft.

Sarom (Oil Berth), length not limited, max. draft 36 ft.

SBM Terminal, length not limited, max. draft 44 ft.

Sarom (Oil Platform No. 4), Length no limit, max. draft 70 ft.

HEALTH: Pratique given by radio, on request to Sanimare Ravenna. Pratique is automatic for vessels coming from ports in Italy, United Kingdom, France, Belgium, Netherlands, Germany and Greece.

RADIO: Messages via Ancona Radio, Venezia Radio, or Trieste Radio. Ravenna VHF Radio Station operates on Channels 16, 25, 26, and 27.

TUGS: Available, join vessel in outer port. Ship's lines are used.

STEVEDORES: To be ordered before 1030 hrs. for afternoon work, and before 1630 hrs. for following morning.

MEDICAL: All facilities available.

TANKERS: No slop discharge facilities available. Dirty ballast may not be discharged within 50 miles of the port.

S.B.M. Terminal:

No. 3 Terminal (Ocean Berth) lies in position Lat. 44° 29′ N., Long. 12° 25′ E. It can accommodate vessels of any length but there is a max. draft of 44 ft.

Discharging by 10-in. flexible hoses connected to ship's port manifold.

Vessel lies stern to buoy heading Northward, using both anchors. These are backed up with a shore wire on each bow. At the stern shore wires are used and there are two breast lines on either side.

If the vessel has to anchor, this should be to the North of the buoy and not less than 3.5 miles from the coast. This gives good holding in mud and clay if plenty of cable is used, as there is occasionally a 2.5 to 3.0 knot Southerly current. Vessels should not anchor South of the buoy due to the presence of telegraphic cables and pipelines.

DENSITY: 1024.

FRESH WATER: Only available ex-wharf at San Vitale and at inner port piers. Barge available for deliveries to the Silos Piers and tanker terminals.

FUEL: Available by barge.

FIRE PRECAUTIONS: Tankers are given copy of port fire regulations on arrival. No repairs or gasfreeing to be carried out without permission of Port Authorities.

GANGWAY/DECK WATCHMEN: Optional, can be employed from shore if required.

OPENING/CLOSING HATCHES: Can be performed by ship's crew or by stevedores.

CUSTOMS ALLOWANCES: 50 cigarettes per man for first day in port. Wine/spirits, allowance is made for normal daily consumption on board.

IDENTIFICATION CARDS: Shore passes given by police.

CONSULS:

Norway	tel. 24.5.47
Sweden	tel. 22.6.39
Spain	tel. 24.0.14

REPAIRS: Minor engine repairs can be effected. Floating dry-dock available for up to 1,000 tons displacement.

REPATRIATION: Can be arranged.

AIRPORT: Forli Airport situated 25 km. away, with daily flights to Rome and Milan.

TIME: GMT plus 1 hour. From May to September, GMT plus 2 hours.

POLICE/FIRE/AMBULANCE: Police, tel. 22.4.66; Ambulance, 22.3.11; Fire, 22.2.22.

TELEPHONES: Can be installed on board at San Vitale berths.

SHORE LEAVE: Allowed. Launch service available for vessels in the roads.

AUTHORITY: Capitaneria di Porto Ravenna.

SALERNO: 40.40 N. 14.45 E. (See Plan Book)

DOCUMENTS: As for all Italian ports, i.e. all ship's documents in valid condition and Arrival Reports, to be filled upon arrival with the Port Authority's representative.

PILOTAGE: Pilot station keeps watch on Channel 16 VHF from 0600 hrs. – 2000 hrs., working Channel 12.

ANCHORAGE: Position of anchorage, about 1 mile W.S.W. of green flashing light (Main entrance).

RESTRICTIONS: Vessel cannot enter or sail from the harbour between 2100 and 0500 hrs.

MAX. SIZE: Vessel allowed to enter port should not exceed 200 m. in length or 27 ft. draft.

HEALTH: Free pratique not obtainable by radio. Usual formalities on berthing.

RADIO: All cables should be sent via "Napoli Radio" call sign "IQH".

TUGS: Lines must be supplied by the ship. Tugs position is near the intermittent light (green).

BERTHING: Five berths with depths from 19 ft. to 27 ft.

STEVEDORES: Stevedores are to be informed 24 hours prior to vessel's arrival.

MEDICAL: Medical Service should be requested in advance. Hospital facilities are obtainable.

DENSITY: Average salinity is 1025 inside port.

FRESH WATER: Fresh water available at all berths.

FUEL: Bunkers may be supplied from Naples by truck or barge. If large quantities are requested supply will be effected by barge from Naples.

CUSTOMS ALLOWANCES: Only 40 cigarettes on vessel's arrival.

This applies to officers and crew. The remaining stock will be sealed in vessel's bonded store.
CONSULS: No consular representatives exist in Salerno. Nearest at Naples.
REPAIRS/DRY DOCKS: No dry dock exists. Only small workshops attending minor repairs.
AIRPORT: The nearest airport is at Naples. Distance 70 km.
TIME: One hour ahead of GMT.
HOLIDAYS: Other than the national festivities, 21st September, a local holiday, being the Name Day of the town's Patron Saint.
TELEPHONES: Emergency phone number is: 113.
DEVELOPMENTS: Presently some works are in progress in order to obtain a further berth with deeper draft.

SAVONA (including Vado Ligure): 44.18 N. 08.29 E.

DOCUMENTS:

Arrival Report for Port Authority.
Cargo Manifest.
Provisions and Crew Personal Effects Manifest.
8 Crew Lists.
Safety Certificates.

PILOTAGE: Ordered through Agent. Telegraphic address: Piloti Porto di Savona. Pilot launch is black with white band. To call Pilot, use flag or light signals according to International Code. For vessels bound for Savona or Vado Ligure, Pilot boards about 0.5 to 1 mile S.E. of the red light at Savona port entrance.
ANCHORAGE: Depths of 25 m. Important limit: it is forbidden to anchor North of bearing 270° from red light between 1st October and 14th May. It is forbidden to anchor East of bearing 360° from the white light between 15th May and 30th September.
RESTRICTIONS: Night entrance is considered for each case depending on type of mooring and vessel's draft. At Savona berths, vessels on maximum draft berth in daylight at high tide. No restrictions on un-berthing.
MAX. SIZE: Savona inner port, max. draft 9 m.; Savona Silos, max. draft 10.50 m.; Vado Ligure Roads, depending on berth depth.
HEALTH: Request free pratique by radio from Sanimare Savona prior arrival.
RADIO: Genova Radio or Roma Radio, VHF at Harbour Master's Office (Tel. 386656).
TUGS: Available, join vessel in vicinity of Savona port entrance or at Vado Ligure just off the berth. Ship's line usually used. If tug line used, tariff plus 20% is charged.
BERTHING:

Savona: Funivie (S. Giuseppe), 32 ft. depth; Savona Silos S.p.A., 30 ft. depth.

Vado Ligure: Fornicoke Pier, 38 ft. depth; Esso berth, 32 ft. depth; Vadoil berth, 39 ft. depth; Shell berth, 31 ft. depth; Chevron berth, 31 ft. depth. Sarpom buoy berths, see "Quiliano Terminal".
BULK HANDLING FACILITIES: Grain: discharged at berth No. 17, rate 500 t.p.h.

Coal: discharged at Funivie, discharging rates ranging between 7,500 and 16,000 tons per day, depending on suitability of vessel for discharging facilities.
TANKERS: Sarpom Sea-Line Terminal, see "Quiliano Terminal".

At Chevron, Shell and Vadoil berths, tankers are moored stern to quay.

No slop discharge facilities available.
STEVEDORES: Ordered by ship's Agent, no separate ETA required.
MEDICAL: All facilities available.
DENSITY: 1025.
FRESH WATER: Obtainable at berths by pipe-line. Barge available for quantities in excess of 60 tons.
FUEL: All grades available by barge.
FIRE PRECAUTIONS: Watchmen on board tankers or vessels handling dangerous cargo.
OPENING/CLOSING HATCHES: Can be handled by ship's crew or stevedores.
CUSTOMS ALLOWANCES: Bond Sealed. Small quantity cigarettes and spirits permitted for consumption while in port.
IDENTIFICATION CARDS: Shore passes given by local police.
CONSULS:

Finland
France
Netherlands
Norway
Spain
Sweden

REPAIRS: All types of repairs possible.
HOLIDAYS: 1st January; 6th January; 19th March; 25th April; Easter Monday; 1st May; 7th May; 28th May; 2nd June; 29th June; 15th August; 1st November; 4th November; 8th December; 25th December and 26th December.
POLICE/FIRE/AMBULANCE: Police, Tel. 28868; Ambulance, 20104; Fire, 801801–802441.
TELEPHONES: Can be connected on board.
SHORE LEAVE: Allowed.
AUTHORITY: Capitaneria di Porto.

TARANTO: 40.29 N. 17.15 E.

DOCUMENTS:

6 Crew Lists.
6 Passenger Lists.
Provisions Manifest.
Manifest of Crew Personal Effects.
Cargo Manifest.
Arrival Report, completed on arrival.
Maritime Declaration of Health Certificate, completed on arrival.
Ship's Certificates including Italian Anchorage Dues.
Vaccination Certificates for sighting.

PILOTAGE: Piloting in Port of Taranto is compulsory for all vessels over 500 g.r.t. Vessels are taken 1 mile off S. Vito Cape Lighthouse. Also for shifting from berth to berth Pilot assistance is compulsory.
RESTRICTIONS: Entry allowed day and night.
MAX. SIZE: Tankers up to 72 ft. draft may berth at buoy mooring. Also see "Berthing".
HEALTH: Free pratique is automatic for vessels coming from Italy, France, Great Britain, Ireland, Germany, Belgium, Holland and Greece. From other countries it may be obtained via radio, by applying to "Sanimare Taranto" between 12 and 6 hours before arrival.

Smallpox vaccinations available. Yellow fever vaccinations could be arranged by calling Bari port doctor to Taranto with two days notice.
TUGS: Towage service is not compulsory and is supplied by one tug of 1,350 h.p., 2 tugs of 1,000 h.p., and one of 1,035 h.p. belonging to Rimorchiatori Napoletani. It is expected that the service will be improved in the future with a further tug of 1,920 h.p.
BERTHING: *Outer Harbour:* Quays No. 1/2, combined length, 1,050 ft. (32 m.); max. draft, 26 ft. 3 in. (8 m.); Quay No. 3, length, 820 ft. (250 m.); max. 27 ft. 10 in. (8.50 m.).

Italsider Pier: *Eastern side* (for discharge of ore, coal, steel scrap): length, 4,456 ft. (444 m.); depth alongside 52 ft. 6 in.; max. draft allowed 50 ft. Vessels up to 200,000 d.w.t. have berthed at Italsider Jetty No. 4. Length 1,353 ft. Depth alongside 80 ft. Discharge rate for iron ore (2 Dravo unloaders) 1600–2400 m.t.p.h. Discharge throughout 24 hours.

Western side (for discharge and loading of finished goods): length, 1,566 ft. (477 m.); depth alongside 33 ft.

Safety. During Winter time, berths are subjected to heavy swell which may force vessels to leave same, as the breakwater effectively protects only the Eastern side. However, work is now in progress to lay new breakwater, which should also render safe the Western side.

Head of the Pier: Width, 448 ft. (136.55 m.); max. length of vessel, 459 ft. (140 m.) or up to 525 ft. (160 m.), subject to vessels laying at Western and Eastern sides being berthed at not less than 164 ft. (50 m.) from head of pier; depth alongside, 32 ft. 8 in, (10 m.).

Cement Pier: Max. depth is 8.50 m.; suggested max. draft 8.20 m. (26 ft, 10 in.); max. vessel length acceptable, 120 m.; rate of loading (in bulk): up to 280 m./t.p.h.; (in bag): up to 35 m./t.p.h.
TANKERS: *Aviation Gasoline Oil Jetty.* Tankers moor with 2 anchors and with stern made fast to 4 buoys. Connection by stern. Vessel lifting up hoses (9 in.) from the jetty (breadth 9 ft., length 1,476 ft.). Length of pipe-line from 0.5 to 1.5 miles.

Access to vessel by boat. No water or bunkers available. Max. draft 25 ft. Night crossing of Mar Piccolo up to and from jetty is not allowed.

Navy Oil Jetty: Pier, terminating in 2 quays, which may accommodate 2 vessels each. Max. draft 33 ft., hoses 300 mm. Night movements allowed.

Petroleum Pier: Exclusively used for handling petroleum products at its 4 berths and is connected by several pipe-lines with Shell Italiana Refinery, as well as with the bulk plants belonging to Agip, and Industrie Chimiche De Gaeta, which are all located in the industrial area of Taranto adjoining to the petroleum port. Access to the pier is through a dock 350 m. long and 33 m. wide. The pier itself is 560 m. long.

Berth No. 1 and 2 (after berths), max, length of vessel, 175 m. (557 ft. 3 in.); max. draft, 9.50 m. (31 ft. 2 in.). Max. depth, 10 m. (32 ft. 9 in.). Bunkers from line, (8 in. hose, 10 in. pipe-line). Water, by barge. Loading arms, 2 of 10 in., 3 of 8 in.

Berth No. 3 and 4 (fore berths), max. length of vessel, 208 m. (682 ft. 5 in.); max. draft, 10.50 m. (34 ft. 5 in.); max. depth, 11.00 m. (36 ft. 1 in.). Bunkers and water, as per berths 1 and 2. Loading arms, 6 of 10 in.

Pier is fitted with 1 line for each product to be loaded (14 lines) and a 20 ft. line for ballast discharge. Any quantity of ballast may be received by the pier. Access to the pier for provisions only via boats.

Shell CBM. Shell terminal for discharge of crude oil is situated in Mar Grande North-east of St. Paul's Island. Distance 3,000 m., and bearing 048° from light at the head of St. Paul Breakwater. Vessels moor at Q buoys with port anchor down. Buoys are equipped with intermittent red lights and quick-release hooks.

The hoses (2×12-in.) are signalled by marker floats and have to be lifted by vessel with derrick capacity at least 8 tons. The terminal is connected with the refinery by a 34-in. pipe-line, 5 km long. Max. length acceptable 330 m., max. draft 72 ft., max. d.w.t. 200,000 tons.

2 tugs recommended for berthing with good weather and without North-westerly winds. Night mooring and unmooring allowed.

Agip/Anic Terminal: Vessels moor with 2 anchors and with stern made fast to 4 mooring buoys.

Maximum draft 26 ft. 3 in. (8 m.). Under rough weather conditions vessels may have to leave the terminal, position being exposed. No mooring at night allowed, while unmooring is permitted. Supplies, bunkers, water, and connections with vessel by barge.

For methanol, tank inspection is usually carried out in the road, before berthing.

Pozzi Ferrandina SPA Terminal: 3 sea lines, the hoses of which must be lifted from the sea bottom by ship's gears. 1 sea line (6 in.) is used to load methanol and 1 (6 in.) to load soda. Third (3 in.) sea line is for water. Port side hose connection. Pipe-line length 0.25 mile.

Vessels moor with starboard anchor and made fast to 3 buoys astern and 1 port. Night movements are not allowed. Max. draft 22 ft. Max. length 85 m.

Industrie Chimiche Di Gaeta, G.I.D. Terminal: Situated further West of Pozzi Terminal, it has 3 sea lines with hoses of 6 in. and 10 in., which have to be lifted from sea bottom.

Vessels moor with port anchor and make fast to 3 buoys astern and 1 buoy forward starboard. Max. draft 22 ft. Night movements not allowed.

BRIDGES: 1 bridge in inner harbour. Opening times: 0020–0420 hrs., 0830, 1510, 2110 hrs. Opening on Agent's request to Harbour Master (24 hours notice requested for day opening time). Max. speed in the canal, 6 knots.

STEVEDORES: Available. Normal working hours are from 0700 to 1500 hrs. For work performed in overtime/and/or holiday, the "Tariffs to the Workers" are increased as follows:

Day	*Shift*	*Increase*
Weekday	1500–2300 hrs.	40%
	2300–0700 hrs.	80%
Saturday	1100–1500 hrs.	40%
	1500–2300 hrs.	40%
	2300–0700 hrs.	80%
Sunday	0700–1500 hrs.	50%
	1500–2300 hrs.	80%
	2300–0700 hrs.	100%

DENSITY: 1029 and 1031. Tides negligible. Maximum variation 1 ft.

FRESH WATER: Available at all quays from 0700 to 1700 hrs. Also available by barge of up to 190 tons capacity.

FUEL: Available by barges from Agip; Shell and Sincat. 48 hours notice requested, aside from usual stemming.

Lubricating Oil. Available from Shell, Mobil and Esso.

FIRE PRECAUTIONS: Performed by fire brigade and compulsory to all tankers undergoing repairs/dry docking. It is requested and paid for by the shipyard, which afterwards charge same directly to the Owners.

GANGWAY/DECK WATCHMEN: Available. Hourly cost, lire 450 per, watchman used (lire 500 on Sunday and holiday).

OPENING/CLOSING HATCHES: Usually carried out by crew, but stevedores also carry out this operation at 1,202 lire per hatch.

CUSTOMS ALLOWANCES: 40 cigarettes and 1 opened bottle wine/spirits per man.

IDENTIFICATION CARDS: Required. Shore passes issued by local police.

CONSULS: Spain, France, Panama and Norway.

REPAIRS: All major repairs undertaken.

DRY DOCKS: 2 floating docks owned by Stabilimenti Navali with dimensions as follows:

	Dock No. 1	*Dock No. 2*
Length at support level	699 ft. 8 in.	808 ft. 4 in.
Length overall	765 ft. 4 in.	869 ft. 4 in.
Breadth at support level	121 ft. 3 in.	137 ft. 1 in.
Depth	29 ft. 8 in.	27 ft. 9 in.
Lifting capacities	28,000 tons	40,000 tons

Max. draft acceptable in channel leading to the shipyard is 33 ft.

REPATRIATION: Good facilities exist.

AIRPORT: Located at Grottaglio, 20 minutes by car from the city. It is served by 4 daily connections with Rome, and 1 to Naples.

TIME: GMT plus 1 hr. Winter. GMT plus 2 hrs. Summer.

HOLIDAYS: New Year's Day (1st January); Epiphany Day (6th January); Saint Joseph's Day (19th March); Liberation Anniversary (25th April); Easter Monday; Ascension Day (19th May); Corpus Domini Day (9th June); Labour Day (1st May); Republic Foundation's Day (2nd June); Saint Peter and Paul's Day (29th June); Assumption Day (15th August); All Saints' Day (1st November); National Unity Day (4th November); Immaculate Conception Day (8th December); Christmas Day (25th December); Saint Stephen's Day (26th December); Town Saint Patron's Day 10th May, at Taranto).

SERVICES: Compass adjusting, etc. available.

SHORE LEAVE: Allowed.

AUTHORITY: Il Comandante Colonello di Porto. Ministero della Marina Mercantile.

TORRE ANNUNZIATA: 40.45 N. 14.27 E.

DOCUMENTS and all General Information – refer to "Naples".

RESTRICTIONS: Mainly a fishing port with few facilities for larger vessels. Reported not to be suitable for larger vessels during winter months due to frequent high winds and heavy swell within the harbour.

MAX. SIZE: Length 472 ft., draft 30 ft.

TRIESTE: 45.39 N. 13.45 E. (See Plan Book)

PORT LIMITS: From Barcola (4 km. East of Capo Miramare) to Zaule, in the Muggia Bay. The roadstead is 18/24 m. deep. If readiness is declared before 1200 hrs. laytime commences at 1300 hrs. If readiness is declared between 1200 hrs. and 1700 hrs. laytime commences at 0800 hrs. the following day. The declaration of "readiness" is made when the ship docks at the operative pier or when the ship anchors in the roadstead.

DOCUMENTS:

For Customs:
2 Cargo Manifests.
1 Stores List.
1 Provisions List.
For Port Authorities:
Arrival Report.
2 Crew Lists.
3 Passenger Lists.
For police:
1 Crew List.
1 Passenger List.
Shore Passes, provided by Agents.
For Port Health:
Maritime Declaration of Health.

PILOTAGE: Compulsory for vessels over 499 g.r.t. Location of Pilot station for large tankers is in approximate position 45° 37′ N., 13° 43′ E.

For smaller vessels Pilot boards in approximate position 45° 39′ N., 13° 44′ E.

ANCHORAGE: No Pilot required to anchor in roads. Normal anchorage for vessels awaiting entry is to the West of Luigi Rizzo Breakwater where the holding ground has been reported to be poor.

MAX. SIZE: Tankers up to 1,000 ft. LOA, draft 54 ft. 3 in. and 160,000 S.D.W.T. at Siot Terminal berths No's 3 and 4.

HEALTH: Free pratique is granted by the local Health Officers who board the vessels on arrival together with Port Authorities. The pratique can also be requested by cable, addressed to "Sanimare – Trieste" and stating the port of origin, the number of crew and general health condition on board.

RADIO: Trieste radio call sign IQX, operating continuously. Radio Telephony and/or telegraphy can be used. RTF Channels 8, 12, 16, and 500. ETA to be sent 48 hours in advance to Agent. Any change of ETA of more than 1 hour should be reported.

TUGS: 10 tugs available up to 3,000 h.p. Tugs normally join vessel at pilot boarding station. Ship's lines used. Tug assistance is compulsory for tankers. Tugs equipped with VHF and foam fire fighting equipment.

BERTHING: Max. draft allowed at berths as follows:

Punta Franco, Vecchio, ore pier, 28 ft.; Other berths, 21 ft. Punto Franco, Nuovo, ore pier, 30 ft. silos, 31 ft. 5 in.; general cargo, 31 ft. Punto Franco, Scalo Legnami, 24 ft. Molo Martello, 30 ft., max. length of ship, 171 m. Italsider, berths, 45 ft.

Siot Terminal, 54 ft 3 in. Pontile Aquila, oil pier, 38 ft. Italcementi, berths, 30 ft. Vetrobel, berth, 30 ft. A.F.A., berth, 21 ft.

Mole No. 7 (Container Terminal)-, max. draft 52 ft.

SPECIALISED CARGO HANDLING FACILITIES: Wheat storage-bin for cereals and oil-seeds, capacity 30,000 tons, with 4 pneumatic unloaders. Auxiliary set, capacity 16,000 tons, with 3 pneumatic dockers.

Coals and minerals plant, Molo VI North, with 7 cranes and 2 bridge cranes.

Coals and minerals plant Italsider pier with two 25-ton unloaders.

Unloading, loading, alcohol and other liquid stowage plant, capacity 5,340 cu.m.

Maturity, conservation and disinfestation fruits and vegetables plant.

Refrigerant, capacity 3,700 tons.

Container Terminal: Quay length 650 m., total area 20 ha. 3 rail-mounted 42-ton gantry cranes (portainer) and other modern and special installations for unloading/loading, moving and parking containers.

Roll-on/Roll-off: 3 ramps.

STEVEDORES: The working hours for the harbour operations are: 1st turn from 0730 to 1400 hrs. 2nd turn from 1400 to 2030 hrs. On Sundays and holidays the 2nd turn is limited to ferry boats, container ships, unloading/loading of live animals, and to perishable goods operations. Customers can take advantage of a possible 3rd turn in the labour days, Monday to Friday, from 2100 to 0330 hrs.

Night work, Sundays and holiday work, the 2nd turn of Saturday and the continuation of the turn is considered as overtime work.

MEDICAL: All facilities available. Preferable order in advance if required on holidays.

TANKERS: No slop discharge facilities; no repairs allowed to tankers at loading/discharge berths; no trucks or lorries allowed at Aquila Oil Pier which can only be approached by motor boats.

Transalpine Pipe-line Terminal (Siot). The piers are orientated 067.5°–247.5° in direction of prevailing winds. Currents do not affect the berths sensibly.

Berths No. 1 & 2 (No. 1 Finger pier 1420 ft. LOA). Max. LOA 950 ft. Max. draft 54 ft. 3 in. Max. d.w.t. 100,000.

Berths No. 3 and 4 (No. 2 Finger pier, 1,475 ft. LOA). Max. LOA 1,000 ft. Max. draft 54 ft. 3 in. Max. d.w.t. 160,000.

Discharge of crude or products is via 3×16 in. unloading arms at berths No. 1, 2 and 3 and via 4×16 in. arms at berth No. 4. The shoreline is 36 in. at foot of pier enlarging to 42 in.

Discharge rates of 14,000 cbm/hr. are possible. Max. permitted pressure 150 p.s.i.

Fuel oil and marine diesel bunkers are available at all berths through 10 in. loading arms on each side of the discharging rack.

Fresh water available all berths and should be ordered through the Agent.

DENSITY: 1025.

FRESH WATER: Available by pipe-line at all berths. No barges available.

FUEL: All grades available, loading rate about 250 t.p.h. 48 hours notice required.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: Optional, but stevedores usually perform this operation for convenience.

CUSTOMS ALLOWANCES: 50 cigarettes for each man and one bottle wine/spirits between 5 men. Only one allowance given while vessel in port.

IDENTIFICATION CARDS: Shore passes are issued by local police.

CONSULS:

Austria	tel. 90891	Holland	tel. 61690
Belgium	tel. 37073	Honduras	tel. 95225
Brazil	tel. 35317	Lebanon	tel. 37370
Chile	tel. 28960	Sweden	tel. 29182
El Salvador	tel. 36556	Turkey	tel. 24393
Germany	tel. 37141	Uruguay	tel. 31664
Great Britain	tel. 35760	U.S.A.	tel. 30221
Greece	tel. 28278	Yugoslavia	tel. 24969
Guatemala	tel. 29551		

REPAIRS: All kinds of hull, deck and engine repairs can be carried out by Arsenale San Marco, Cantieri Alto Adriatico and other yards.

DRY DOCKS: dry docks available, the largest of which is 206.96 m. long; 30.0 m. wide, 27.60 m. depth and 8.25 m. sill depth.

REPATRIATION: No facilities.

AIRPORTS: 30 miles distant. Two flights daily to Venice/Milan and Rome for international connections.

TIME: GMT plus 1 hour. Summertime: GMT plus 2 hours.

HOLIDAYS: New Year's Day (1st January); Epiphany (6th January); St. Joseph (19th March); Liberation Day (25th April); Labour Day (1st May); Good Friday, Easter Monday, Ascension Day, Corpus Domini (variable dates); Proclamation Day (2nd June); St. Peter and St. Paul (29th June); Assumption B.V. Maria (15th August); All Saints' Day (1st November); St. Giusto (3rd November); Victory Day (4th November); Immaculate Conception (8th December); Christmas Day (25th December); Boxing Day (26th December); Cargo work can be arranged on the above days.

POLICE/FIRE/AMBULANCE: Police, tel. 113; Fire, 2222; Ambulance, 68888.

TELEPHONES: Can be installed on board.

SHORE LEAVE: Allowed.

DEVELOPMENTS: New dry dock 350 m. length under construction.

AUTHORITY: Ente Autonomo del Porto di Trieste.

VENICE: 45.26 N. 12.20 E.

DOCUMENTS: Minimum number of ship's papers required upon arrival:

By Port Health
2 copies Passenger List.
2 copies Crew List.

By Police
2 copies Passenger List.
2 copies Crew List.

By Ship's Agents
2 copies Passenger List
2 copies Crew List.
2 copies Cargo Manifest.

By Customs
2 copies Cargo Manifest.
2 copies Provisions and Stores List.

PILOTAGE: Pilot boards 2 miles from breakwater. Master can contact Pilot by VHF.

ANCHORAGE: Anchorage for large tankers will depend upon Master's discretion. However there is a good anchorage in position 45° 23' 30" N. 12° 34' 00" E.

RESTRICTIONS: Advisable to enter during daytime and with favourable tide. Vessel up to 29 to 30 ft. draft can enter at high water. Vessel of this size can berth alongside with use of a pontoon. Tankers; normally restricted to 31 ft. draft. Also see "Tankers".

HEALTH: Health Officer boards as soon as vessel is berthed. Pratique can be obtained by radio prior arrival. Radio request to Sanimare Venice through Trieste Radio.

TUGS: Tugs are available in plenty and will join vessel at breakwater and/or off Lido when proceeding to S. Nicolo. Ship's lines have to be used.

BERTHING: Banchina Piave have a total quayage of 2,760 ft. long with a depth of water varying from 25 to 26 ft. at low water.

Banchina Tagliamento have a total quayage of 2,500 ft. long with a depth of water varying from 26 to 29 ft. at low water.

Testata Marmi have a total quayage of 720 ft. long and 26 ft. depth of water.

Banchina Palazzo have a total quayage of 525 ft. long and a depth of water of 26 ft.

Banchina Isonzo have a total quayage of 2,360 ft. long with depth varying from 24 to 30 ft. at low water.

Testata Silos have a total quayage of 330 ft. long with a depth of water 21 ft. at low water.

Banchina S. Marte e Magazzini Generali Punto Franco (Free Port) have a total quayage of 2,950 ft. long with a depth of water varying from 21 to 23 ft. at low water.

Porto Marghera:

Leghe Leggere with a depth of water 27 ft. at low water.

Radice Molo "A" with a depth of water 27 ft. at low water.

Banchina Veneto with a depth of water varying from 22 to 25 ft. at low water.

Banchina Lombardia with a depth of water 28 ft. at low water.

Banchina Piemonte with a depth of 30 ft. at low water.

BULK HANDLING FACILITIES: Bauxite discharging at Montecatini and Molo Commerciale in Porto Marghera.

Discharge by crane grabs at rate of 2,000 tons per day at Montecatini, and 1,500 tons per day at Molo Commerciale. Vessels up to 28 ft. draft can be accommodated.

STEVEDORES: The Provveditorato al Porto Venice are exclusively entitled to manage all the commercial work in the harbour including stevedores. Vessel should en route ETA cable to Agent at least 48 hours prior vessels arrival to arrange gangs.

MEDICAL: Hospital facilities always available. No notice required in advance.

TANKERS: Tank washings cannot be disposed of inside port. Diameter of loading discharge lines 8 to 12 in.

One berth for tankers at San Leonardo can accommodate vessels up to 85,000 d.w.t. Max. draft is 43 ft. 3 in. Good discharging and no back-pressure. Speedboats up to Venice take about 40 minutes.

Discharging berths for tankers at Porto Marghera:

Darsena IROM, length 570 m., depth 30 ft. Tankers over 31 ft, draft require special approval.

Esso Pier: depth alongside 30 ft.
Shell Pier: depth alongside 30 ft.
Agip Pier: depth alongside 23 ft.

Port entrance of Malamocco, at point of the island of Lido, has been reopened where a canal 12 m. deep leads to Port of Marghera. This canal allows large tankers to proceed to coastal storage tanks without passing through urban centre of Venice.

DENSITY: Average salinity of water inside port 1020.

FRESH WATER: Available.

FUEL: All grades available and delivered by barge.

CUSTOMS ALLOWANCES: The Customs require from the ship a complete list in duplicate of Provisions and Stores. It is particularly important that the quantities of items such as tobacco, cigarettes, spirits, coffee, matches, pepper, salt, spices, cars, chocolate, should be given accurately. Customs Officers will supervise the issue while ship is in port. Amount of tobacco allowed out of Bond: 50 cigarettes per man for all foreign vessels except British and U.S.A. flags. 20 cigarettes per day per man on British and American flag vessels.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CONSULS: Following are Consulates maintaining their offices at Venice.

Argentine
Austria
Belgium
Denmark
Finland
France
Great Britain
Germany
Greece
Guatemala
Lebanon
Liberia
Norway
Holland
Panama
Peru
Portugal
Spain
Sweden
Switzerland
Uruguay

REPAIRS/DRY DOCKS: There are ample facilities for repairs. Following are particulars of Venice dry docks:

Minore	*Maggiore*	*Principe*	
298.8 ft.	526.3 ft.	820.3 ft.	extreme length
58.4 ft.	79.8 ft.	117.8 ft.	breadth of entrance
1.0 ft.	1.0 ft.	3.1 ft.	height of sill above bottom dock
19.7 ft.	29.6 ft.	36.0 ft.	depth on sill at high water.

AIRPORT: International Airport Marco Polo about 10 km. from Porto Marghera. Served by regular airlines.

TIME: GMT plus 1 hour. Summer Time from June to September.

HOLIDAYS: The public and port holidays are the following: 1st January; 6th January; 19th March; 25th April; Monday after Easter Day; 1st May; Ascension Day; Corpus Christi Day; 2nd June; 29th June; 15th August; 1st November; 4th November; 21st November; 8th December; 25th December; 26th December.

TELEPHONES: Telephones will be placed aboard the ship.

AUTHORITY: Il Comandante di Porto.

Ivory Coast

ABIDJAN: 05.18 N. 04.00 W. (See Plan Book)

PORT LIMITS: The pilotage zone, is limited by a circle with a 3.5 mile radius centred on the pier lighthouse of the West jetty of the entry canal.

DOCUMENTS: "All ships calling at Abidjan to discharge cargo will have to supply on arrival altogether 13 sets of cargo manifests and 4 sets of freighted manifests for each port of loading, as the administration no longer accepts reproductions of documents supplied by the agents. Furthermore, Masters are reminded to hand to agents on arrival, 6 crew lists, 4 stores lists, 4 bonded stores lists, 4 crew declarations, 6 passenger lists (even if nil), 5 animal lists (even if nil), 5 narcotics lists, (even if nil), 5 lists of ports of call and 1 vaccination list. Furthermore, the attention of Masters is drawn to the fact that the Customs Services are strictly enforcing the control regulations on incoming vessels and very heavy fines are imposed in cases of omission or mistakes in declarations of slop chests, stores lists etc".

PILOTAGE: About 1 hour before arrival ships equipped with VHF shall confirm to the Pilot station their correct hour of arrival off the Roads; then the boarding time for Pilot shall be communicated. It is essential that these times are clearly understood both by ship and Pilot station.

Ships shall stay in a position so they keep across the swell and the wind which both generally come from the South and they shall put the pilot ladder on the lee side, i.e. Port if steering Eastward, Starboard if steering Westward.

Pilotage is compulsory, except for shifting alongside quays. For ships leaving harbour or shifting within harbour limits, request for a Pilot should be made at the Harbour Master's Office at least 3 hours before sailing or shifting. For a night sailing or shifting, request must be made before 1700 hrs.

Warning: when embarking Pilot, keep well clear of sandbank extending from entrance to Vridi Canal.

ANCHORAGE: Vessels may anchor on the outer road in 20 to 30 m. of water, firm sandy bottom, also to the South and to the West of the West jetty of the Vridi Canal.

RESTRICTIONS: Ships may leave or enter Abidjan only between certain time limits. These limits are transmitted by Abidjan-Radio: on 500 kc/s on request; on short wave, at the beginning of each watch period.

MAX. SIZE: Until now the largest vessel admitted was 243 m. in length. Vessels with a length of 250/260 m. may be able to be admitted ultimately. At the present time, the maximum permissible draft is 31 ft. It will soon be increased to 33 ft.

HEALTH: Request for free pratique is given by the Agent to Port Health Authority, who will board vessel on arrival.

RADIO: Masters must radio through Abidjan – Radio their ETA and draft, 24 hours and again 6 hours before their arrival, to the Port Commandant (COMPORT) or in his absence, to the consignee. For a night arrival, the telegram must arrive at the station before 1700 hrs.

When at anchorage off Vridi canal, vessels should watch for signals from Vridi signal station, which keeps continuous watch, and advise them regarding the time the Pilot will board their ship. Port Captain's office and Vridi signal station keep a permanent watch on 156.6 Mc/s and 156.8 Mc/s. Agents may be obtained through Abidjan-Radio on 2182 kHz. Abidjan-Radio answers on 1813 kHz.

Shipmaster's Report: 1978

Abidjan Radio no longer broadcast Vridi Canal opening times for entry into port of Abidjan. This information can be received from Pilots Channel 12 or from local Agent. Canal opening times are only known 3 to 4 days ahead.

VHF: Channels 16 and 12 are used: 16 for security and 12 for general traffic. It is strongly advised to use Channel 12. This Channel is strictly reserved for the harbour traffic and ships wishing to talk to each other should do so on a ship to ship Channel (6 or 8).

RADAR: Is installed in the Harbour Master's office. Vessels can contact port radar by calling "Comport Abidjan" on VHF Channels 16, 12 and 11, or through Abidjan Radio, which keeps watch on Channel 16.

TUGS: Tugs join vessel at the port entrance. Towing lines are provided by the tug.

BERTHING:

Bananier Quay: (Banana Carrier Quay): Length 350 m., 2 berths, depth 7 m.

North Quay: Length 775 m., 5 berths (Nos. 1–5) from East to West, depth 10 m.

West Quay: 1,525 m., 10 berths Nos. 6 to 15 from North to South, depth 10 m.

South Quay: 1,550 m., 9 berths Nos. 16 to 24 from North to South, depth 11.5 m.

Roll-on/Roll-off Berth: Length 200 m. Depth 11.5 m.

A temporary roll-on/roll-off berth is located at the North Quay of the fishing harbour, length of the quay 350 m., depth 7 m.

A quay 90 m. long, situated on the South bank of the lagoon between the access canal and the discharge canal (Bietri Canal) extended by a system of piles, permits the mooring of vessels 140 m. long and with 26 ft. draft. This Quay is called 'Siveng Quay' and is reserved for the Company of the same name.

2 oil wharfs situated on the East bank of the access canal accommodate large vessels of more than 200 m. with a max. draft of 31 ft.

A "sea line" buoy situated off Port-Bouet can accommodate vessels having a length of 270 m., and a draft of 46 ft. and not exceeding 75,000 d.w.t.

Mooring buoys lined up in the North part of the port (Banco Bay) are used by vessels taking on timber.

The Quays of the port are not equipped with cranes, so loading and unloading operations are undertaken by vessels own gear.

SPECIALISED CARGO HANDLING FACILITIES:

Container Terminal: Currently in the course of construction, completion expected 1979, 3 berths each of 200 m. (Berths Nos. 22, 23 and 24), the area of the container park will be approximately 120,000 sq.m. A study with regard to equipping these quays with gantry cranes is being undertaken. At the present time, only Quay No. 22 is in service, the area of the container park is 60,000 sq.m. Loading and unloading of the containers is by ship's gear. Transport on the quays is made by trailers.

Roll-on/Roll-off berth: This berth will be completed in October 1979; it will be a park of approximately 40,000 sq.m.

Details of the ramp of the temporary berth, situated on the North quay of the fishing harbour are as follows: Width 17 m., height above chart datum 1.5 m., permissible loading 20 tons by pulley: The height of the quay above datum is 1.8 m.

Vessels arriving with cereals destined for "Grand Moulins D'Abidjan" are received at Berth No. 1, or they are given a berthing priority. Handling is by means of suckers and conveyor, average rate of discharge 150 t.p.h. The capacity of the silos is 30,000 tons. The "Grand Moulins" are also equipped to load pellets in bulk at this berth. They can also receive cereals for third parties; in this case the transporting vessel still benefits from the mooring priority.

The handling companies Transafric and Socopao are also equipped with suckers (Vigan pumps) for discharge of cereals. Evacuation is then made either by tipper lorries (Transafric) or by direct discharge under hangar (Socopao). The vessels are then directed to the ordinary berths and do not benefit from any mooring priority. The rates of discharge are in the order of 50 to 70 t.p.h.

Palm oil is usually taken on board at Berth No. 16 where 2 pipe-lines come from the oil depots. The diameter of these pipe-lines are 4 in., and the flow rate is 250/280 t.p.h. Vessels mooring at this berth do not have priority. These oils may be taken on board at any other berth by tankers.

Wine in bulk is also received at the ordinary berths and also discharged by tankers.

The timber yard is situated in the North part of the port. It is bordered by a quay of 380 m. from which the timber is put in the water or loaded on barges before being towed to the vessel on which it is to be loaded. The equipment of this park (yard) is as follows: 1 gantry crane of 20 tons and 1 of 10 tons, 1 derrick of 20 tons, 3 fork lifts of 16 tons, 1 fork lift of 7 tons.

The park for discharged timber is situated between the West quays and the fishing port; it is bordered by a quay of 350 m. called "Quai de Chalandge" (Lighterage Quay), depth 2.5 m. The equipment for this park comprises: 5 fork lifts of 10 tons and 1 of 12 tons.

The port has 2 floating cranes: one with 150 tons capacity and one of 25 tons capacity.

Mooring of tankers at the wharves of the Vridi Canal is made at slack water and departure at the end of high tide. It is also to be noted that, in spite of reinforced moorings, the mooring to these wharves is sometimes rendered impossible because of the heavy swell which builds up in the canal.

Prime materials for manufacture of fertilizers are received in bulk at the "Siveng Quay" where discharge is by derricks and suckers.

The banana carrier quays are provided with air conditioned and stocking hangers as well as necessary equipment for loading.

TANKERS: (Also see "Berthing".)

Shipmaster's Report: The Sea Line Berth at Port Bouet near Abidjan.

(a) Introduction: Vessel ordered to part discharge 21,000 tons of crude. With a max. draft of 48 ft. 6 in., this was the largest vessel to use these facilities; the previous largest being about 60,000 d.w.t. (1973).

(b) Approach from sea: Coast line is low with few distinguishing marks. Outline picked up at about 18 miles range (using Marconi Raymark), at about the same time as 100 fathom line was crossed. Coast is very steep-to with a pronounced rift in sea bed leading to canal entrance in Abidjan.

(c) Anchorage: Vessel anchored about 2 miles from sea line terminal at Port Bouet. The usual anchorage is to West of canal, which would permit a more suitable approach to the berth.

(d) Berth: The sea berth is situated about 1 mile S.S.E. of Port Bouet light. According to chart prepared by terminal authorities Societe Ivoirienne de Raffinage (SIR), the depths of water in the berth are 16 m. aft and 19 m. for'd, at chart datum. Members of the diving team and terminal representatives are of the opinion that there is greater than 1m. more water than indicated; this is backed up by observed soundings of for'd depth of 21 m., with a rise of tide of 0.5 m.

Moorings consist of four 6 in. shore wires from buoys aft; 4 similar wires for'd, 2 from buoys, 2 from the sea bed; both anchors are used with about 8 or 9 shackles of cable on each.

Hoses are connected on port side, 2×12 in. leading to a 1×24 in. × 5 km. sea line. Back pressure is limited to 7 kg./sq. cm. (about 100 lb. sq. in.). Berth is aligned to head into the prevailing Southwesterly wind. Unfortunately this places the vessel beam on to the current which is unpredictable in both magnitude and direction. After 9 years' experience at the berth, the diving team are unable to predict for a particular time if the current will run at all, or in what direction or at what strength. Current velocities of up to 2.5 knots are normal. If the current starts to run at this strength at an early stage of a berthing operation it is probable that the operation will have to be abandoned.

(e) Berthing: Approach to the berth is made on a heading of 145° in line with buoys A and B on SIR chart. During much of the approach the vessel is within 5 cables of the shore, but, with one exception, the depth of water is adequate.

When the vessel was between 1 and 2 ship's lengths from buoy A, in Grid reference position 579.030 393.280 on SIR chart, the under keel clearance was 15 ft., for several minutes. There was a very low, barely discernable, swell running, but the approach to the berth runs with this swell directly abeam, causing the vessel to roll an estimated 5°; the effect of this was to give a min. bilge clearance of 10 ft.

Berthing operation is routine, with some shore labour assisting with wires. No carpenters' stoppers are provided for wires, but two each end can be made fast on to the storage drums of the winches.

(f) Discharging: Limiting back pressure maintained by two cargo pumps running at 1,200 r.p.m. Discharge rate achieved was 2,237 t.p.h., which is usual for this berth.

(g) Bunkering: Bunkers are available in the berth in amounts greater than 500 tons. As bunkers are taken via the same sea line as cargo is discharged, the operation is somewhat clumsy and time consuming: crude in the sea line is displaced by fuel oil; the hose is shifted to bunker connection; bunkers are taken; the hose is reconnected to cargo manifold; the fuel oil in the sea line is displaced by crude oil. This sequence of operations took a total of eight hours. If a total discharge was planned, it might be advisable to take bunkers in the middle of the discharge, in order to obviate the need to use stripping pumps to displace the fuel oil in the sea line, amounting to some 1,200 tons.

STEVEDORES: Gangs must be ordered before 1700 hrs. on the previous day.

MEDICAL: All medical services and hospitalisation can be arranged without difficulty. Crew members are obliged to have valid certificates against smallpox and yellow fever.

DENSITY: Varies from 1025 in January to 1000 in November.

FRESH WATER: Supplied from the quay at the rate of 40 t.p.h. per hydrant. Can be supplied by barge.

FUEL: 1500 secs. fuel available from Abidjan Refinery. Advance notice required.

WATCHMEN: Services of shore watchmen are recommended.

HATCHES: Normally opened and closed by stevedores.

CUSTOMS ALLOWANCES: Each man allowed to retain 200 cigarettes and 1 bottle of alcohol.

IDENTIFICATION CARDS: Should be carried by crew going ashore.

CONSULS: The following countries are represented locally:

Algeria
Belgium
Brazil
Colombia
Congo
Denmark
Ethiopa
Finland
France
Gabon

Germany
Ghana
Great Britain
Italy
Israel
Japan
Korea
Lebanon
Liberia
Mauretania

Morocco
Netherlands
Nigeria
Norway
Sweden
Vietnam
Tunisia
A.R.E.
U.S.A.
U.S.S.R.

REPAIRS: All types of repairs can be effected. There is a floating dock with lifting capacity 2,000 tons.

REPATRIATION: Can be arranged.

AIRPORT: Local international airport with connections to all parts of the world.

TIME: GMT. No alterations during the year.

HOLIDAYS: 1st May and 7th December no work can be carried out. Other holidays which may be worked at overtime rates are: 1st January, Easter Monday, Whit Monday, Ascension Day, 1st November, Christmas.

POLICE/FIRE/AMBULANCE: Police, tel. 35.57.57; Fire, tel. 238/82; Ambulance, tel. 238/82.

TELEPHONES: Can be connected on board if requested for vessels moored at quays No. 1, 2, 4 and 5.

SHORE LEAVE: Allowed without restriction.

DEVELOPMENTS: The container and roll-on/roll-off terminal, presently in the course of being built will be completed around October 1979.

The port extension project of the LOCODJRO site (West bank of the Bay of Banco) will be constructed around 1980/1982.

AUTHORITY: Direction du Port D'Abidjan, Commandant du Port.

AGENT: Socopao Cote D'Ivoire, B.P. 1297. Abidjan. Tel. 32 02 11. Telex 3745, 3755, 3413. Telex (Maritime): 3562. Cables: "Freight Abidjan".

NOTES

Please also advise Shipping Guides Ltd.

Jamaica

KINGSTON: 17.57 N. 76.47 W. (See Plan Book)

DOCUMENTS:

For Customs Port Royal

2 Health Certificates (obtainable from Customs Port Royal).
2 Crew Lists.
2 copies Passenger Lists.
2 Dangerous Cargo Lists.
1 Ship's Register.
2 Crew Declaration (obtainable from Customs Port Royal).
2 Stores List.
International Certificates of Vaccination for each Crew member.

For Immigration

2 Crew Lists.
2 Passenger Lists.

For Agent

Bills of Lading covering all cargo on board.
2 Crew Lists.
2 Stores Lists.
5 Manifests.
Ship's Register, Safety Certificate and Load Line Certificate.

For Quarantine

1 Derat. Certificate.
International Certificates of Vaccination for Crew members.

PILOTAGE: Six hours advance notice to Agents required. Pilot boards vessel about 2 miles S.E. of Plumb Point Lighthouse. Contact Pilot station VHF Channel 11. Several small Pilot boats in use at present which come out from Kingston as required.

ANCHORAGES: Depth of ship channel 35 ft. recommended. 4 specified anchorages, namely A, B, C, D – these having to be reserved in advance. Also unlimited anchorage space towards Eastern end of harbour. Positions of these 4 specified anchorages as follows:

Anchorage A 221° distant from R.C. Cathedral Dome 14.4 cables.
Anchorage B 180° distant from R.C. Cathedral Dome 11.0 cables.
Anchorage C 168° distant from R.C. Cathedral Dome 10.7 cables.
Anchorage D 155° distant from R.C. Cathedral Dome 11.0 cables.

RESTRICTIONS: Entry – day or night. Rise and fall of tide, average range 10 in., occasionally 16 in. Strength of current in harbour 1.5 knots in some places. Main direction and average speed of prevailing winds E.S.E. 20 m.p.h. Months of max. rainfall (i) April/May, (ii) Sept., Oct. and Nov. Hurricane period June 15–November 15.

MAX. SIZE: Recommended max. draft into Port Royal 40 ft. for vessels of unlimited size. Main ship channel has max. recommended draft of 36 ft. 6 in. and is 800 ft. wide. Depth 39 ft. at MLO. Newport West has recommended draft of 32 ft. 6 in. with a turning basin of 1,500 ft. Esso Terminals has recommended max. draft of 34 ft. 6 in. Max. recommended draft of 32 ft. 6 in. to proceed Eastwards, from Esso Terminals, in harbour to anchorage or berths. Newport East has max. recommended draft of 27 ft. 6 in.

HEALTH: See "Documents".
Radio Pratique may be granted.

Pratique Procedure: The Customs Officer who boards vessel will indicate to Master when pratique granted, after he has checked all documents and placed under bond all excess tobacco and liquor on board. In respect of vessels arriving from restricted areas (e.g. Texas, U.S.A.) vessel will not be granted pratique at Port Royal but at berth after being sprayed (at berth) by Quarantine Officer. A vessel with suspected fever or disease on board should inform Agent before arrival. The Agent will advise Customs at Port Royal and Quarantine. The Quarantine Officer will tell Master whether to proceed to Quarantine Anchorage or to berth direct.

If a vessel obtains pratique at Kingston, automatic pratique granted to proceed to any other port in Jamaica.

RADIO: Cable Agents giving ETA, Draft, Passengers (if any), cash required. Call sign "KNRDO 6YI".

VHF: VHF Channel 16 – Kingston Radio. VHF Channel 11 – Pilotage.

TUGS: Tugs optional. Tug joins incoming vessel near berth. In case of emergency tug joins vessel wherever requested by master. Usually ship's lines used, but if tug's lines used there is no extra cost.

BERTHING: No specific requirements for berthing. If explosives on board a special permit is required from Harbour Master and Customs. Extract from Gunpowder and Firearms Law:

> "Twelve hours' notice shall be given by Agent of ship to Harbour Master or Principal Officer of Customs, as case may require, of intended arrival of a ship with Gunpowder and/or Dangerous Explosives on board, and such ship shall not be permitted to come alongside a wharf or any ship in Harbour or to break bulk until Harbour Master or Chief Officer of Customs, as case may be, is satisfied that Gunpowder and/or Dangerous Explosives are of such character and are so stowed, or are in opinion of Harbour Master or Collector of Customs, in such trifling quantity as not to be an element of danger, when proper Officer shall certify –
>
> (*a*) that in consideration of character, method of stowage, or quantity of such Gunpowder and/or Explosives it is safe for such ship to berth and proceed to discharge cargo without special precaution, or
>
> (*b*) that having regard to considerations aforesaid such ship should discharge such Gunpowder and/or Explosives into lighters or at place appointed under rules for special landing before being allowed to berth or break bulk in connection with landing or shipping of other cargo."

Kingston has a new port development in harbour West of the city. There are 11 berths (numbers 1–11) operated by two private wharf companies. Berths No. 1–9 equipped for Ro/Ro traffic. Max. depth of water in channel approaching and alongside berths is 35 ft. Recommended draft is 32 ft 6 in. Bunkering facilities available at all new berths.

Port Bustamante: Operated by Western Terminals:

Berth No.	Length	Depth
No. 1	525 ft.	26 ft.
No. 2	600 ft.	35 ft.
No. 3	600 ft.	35 ft.
No. 4	600 ft.	35 ft.
Operated by Kingston Wharves.		
No. 5	600 ft.	35 ft.
No. 6	600 ft.	35 ft.
No. 7	600 ft.	35 ft.
No. 8	600 ft.	35 ft.
Operated by Kingston Terminal Operators:		
No. 9	600 ft.	35 ft.
No. 10	600 ft.	40 ft.
No. 11	600 ft.	40 ft.

STEVEDORES: To enable Agent order gangs important to obtain accurate ETA from vessels. Time: 1200 hrs. the working day before vessel arrives. Shifts: 0700–1400 hrs., 1400–2100 hrs. Mondays to Fridays; 0700–1200 hrs. Saturdays. Sundays – full overtime.

Stevedores normally rig and open, but crew open McGregor hatches. All necessary gear supplied by stevedores except rain tents and special lifts requiring special gear, which vessel must supply. Average unloading rate 10/15 tons per gang hour for general cargo.

CARGO HANDLING: Wherry Wharf (a Sufferance Wharf) maintains a pier at Newport East for unloading lumber, corn and animal feed ingredients. The wharf is 200 ft. long and a depth of 29 ft. and an apron of 200×60 ft.

Jamaica Gypsum Limited: Jamaica Gypsum Limited operates a wharf at Harbour Head for the export of gypsum rock only.

There are 3 steel and concrete dolphins and 1 wooden dolphin. The concrete and steel dolphins are the principal docking structures. They are 161 ft. apart. The minimum draft currently available is 26 ft., but this could be increased at short notice to 29 ft. Vessels of 440 ft. length and 64 ft. beam are normally loaded. Bulk rock loading facilities capable of loading crushed gypsum at an average rate of 700-1000 t.p.h. are available.

There are no specialised berths on the public wharves for handling bulk cargoes. Although sulphur salt, caustic soda and grains have been discharged, consignees make their own discharging and storage arrangements.

Grains for the flour mill and feed factory are discharged at Shell Oil Pier and conveyed by the plant's own system into the factories. Berths 1 to 9 in Newport West are equipped for roll-on/roll-off traffic and containers. There is a mobile crane stationed on the docks capable of lifting 140 tons max. Liquid chemicals and LPG are handled by the oil companies at their private docks.

MEDICAL: Agents to be advised before arrival of vessel if emergency medical attention required. Hospital facilities available. If inoculation required Master to advise Agents prior arrival of vessel.

TANKERS: No specific requirements applicable to oil carriers. Reducers available to fit 12 in.–4 in. load/discharge lines. Slop (residue) discharge facilities available taking maximum 500 gallons. Gas free certificate required for tankers laying alongside Public Wharves in Kingston.

Texaco Caribbean Inc.:
Texaco Caribbean Inc. operates 2 wharves:

Eastern Terminal: Jetty 325 ft. long. Takes vessels up to 18,000 tons (gross). Maximum draft is 28 ft. at low tide, Berthing facilities provide 2 concrete dolphins supported by steel piles and 4 mooring buoys. 6 pipe-lines are run on the jetty for the receival of bulk petroleum products and the bunkering of vessels. No packaged goods are handled at this berth. Fresh water supplies are available.

Western Terminal: Jetty 643 ft. long. Takes vessels up to 18,000 tons (gross). Constructed with 2 concrete dolphins and wooden dock head. Berthing facilities provide 2 mooring buoys. Maximum draft at low tide is 28 ft. 6 in. Four product lines are run on the jetty to receive cargoes only. Fresh water is not available at this jetty. No packaged goods are handled at this berth. However, this berth is inactive at present.

Shell Company (W.I.) Limited: The Shell Company (W.I.) Ltd. has bunkering facilities at 2 wharves:–

Shell Installation: The wharf has a maximum draft of 32 ft. It is used for loading and unloading of goods in connection with the petroleum operations in Jamaica of the Shell Company (W.I.) Ltd. and also loading and unloading of goods in connection with Jamaica Flour Mills Limited. A complete range of bunkers is available.

Shell Bunkering Depot Newport West: A hydrant system with outlets at each berth provides a complete range of bunkers.

Esso Standard Oil S.A. Limited: Esso Standard Oil S.A. Limited operates 2 wharves:–

Esso Marketing Terminal: Maximum length of vessels – 600 ft. Maximum safe draft – 29 ft. Both day and night berthing possible. Fresh water is available. Bunkers available here are Heavy Fuel Oil (Bunker C), Marine Diesel, Auto Diesel and a wide range of intermediate bunkers.

Esso bunkering facilities are available at Newport West. Pipelines run from the nearby Esso Kingston Terminal to the berth at

Newport West providing Heavy Fuel Oil, Diesel Oil and intermediate ranges of bunkers.

Esso West Indies Limited (Refinery):
Operates 2 Wharves:

Esso Refinery Marine Dock:
Maximum length of vessels – 690 ft. Maximum safe draft 34 ft. 6 in. Fresh water is available and day and night berthing possible. The Esso Refinery Pier is used for receiving crude petroleum from tankers as feed stock for the Refinery through a 20 in. undersea pipe-line. A wide range of finished products is also delivered into tankers for export as well as for discharge at other ports on the island.

Esso Refinery Dry Cargo Dock: Maximum length of vessels – 400 ft. (Freighters) and 475 ft. (Tankers) with maximum safe draft of 18 ft. Fresh water is available. This dock is used for loading packaged and drummed lubricating oil on freighters for export to various countries throughout Central America and the Caribbean.

Other material exported here are lubricating oil in bulk and various grades of asphalt in drums.

DENSITY: Average density 1026. No tide.

FRESH WATER: Fresh water available at berth. Average rate of delivery 20 t.p.h.

FUEL: All grades (viscosities) available. At least 2 days advance notice required.

FIRE PRECAUTIONS: Fire boat available equipped for fighting harbour fires 24 hours per day. Also equipped fire engines situated within easy reach of docks available 24 hours a day.

GANGWAY/DECK WATCHMEN: Services of watchmen are recommended.

OPENING/CLOSING HATCHES: Hatches covered by Pontoon and Hatch Boards opened and closed by stevedores. McGregor hatches handled by crew.

CERTIFICATES:
Safety Certificate.
Ship's Register.
Load Line Certificate.
Test Certificates for derricks and cargo handling gear.

CUSTOMS ALLOWANCES: Tobacco, 2 oz. tobacco in any form (2 oz. pipe tobacco or 40 cigarettes) per day. Wine and/or spirits, 6 oz. or 0.5 reputed pint of spirit per day. 1 pint wine allowed Master and Officers only or as stated in the Articles under flag they fly.

CARGO GEAR: The usual certificates covering testing and inspection of all gear and equipment as required under Docks Regulation 1934 of Great Britain or by International Labour Organisation, will be acceptable.

IDENTIFICATION CARDS: No Identification Cards required.

CONSULS: Consuls not available on Saturdays and Sundays, except by special request.

	Kingston Tel. No.
Consular Offices	
British Information Service	24135, 22711
Canadian High Commissioner	65726–0
Trinidad and Tobago High Commissioner	65739, 65730
Embassies	
American Embassy	63645
Argentine Embassy	77616
Chinese Embassy	78161
Dominican Embassy	66676
French Chancery Embassy	79811
German Embassy	26551
Israeli Embassy	68768
Mexican Embassy	66891
Netherlands Embassy	69026–8
Panamanian Embassy	70042
Venezuelan Embassy	65519–0
Consular Offices	
Argentine Consulate	77616
Austrian Consulate General	25623
Belgium and Luxembourg Consulate	0353–259
Colombian Consulate General	42004
Costa Rican Consulate General	67285
Cuban Consulate	84564
Danish Consulate	36737
Finnish Consul	23006, 22519
German Embassy–Consular Section	26551–3
Greek Consul	23685
Guatemalan Consul	42966
Haitian Consulate General	25888
Hondurian Consul Ad Honorem	67285
Italian Consul	66981
Jordanian Consulate	82661
Lebanon Consulate	76465
Liberian Consul	27169
Mexican Consulate	66891
Nicaraguan Consul	22856
Norwegian Consul	22151
Peruvian Consul	76565
Salvadorian Consul	25780
Spanish Consul	22856
Swedish Consulate	36737
Swiss Consulate General	23347

REPAIRS: Minor deck and engine repairs possible by 2 firms. Pre-advice of 3 days recommended.

DRY DOCKS: Dry dock facilities available.

REPATRIATION: Facilities available for effecting crew changes.

AIRPORT: 10 miles from port and is served by regular airlines.

TIME: Local time is GMT minus 5 hours.

HOLIDAYS: Days when work is performed only on overtime rate: New Year's Day; Ash Wednesday; Easter Monday; National Heroes Day (third Monday in October); Boxing Day. Days when ports closed, no work performed: Good Friday; National Labour Day (May 23rd); Independence (first Monday in August); Christmas Day.

POLICE/AMBULANCE/FIRE: Emergency tel. numbers: Police 116; Ambulance 110; Fire 110. Commissioner of Police 79858–0. Radio Control Room 81261–2. Fire Brigade 22121. Fire Boat Station 27018.

TELEPHONES: Arrangements exist for placing telephones on board. The Jamaica Telephone Company to be advised by Agents 2/3 days before vessel arrives.

GENERAL: Bunkering Facilities: Bunkers are supplied by three firms: The Shell Oil Co. (West Indies) Ltd. Texaco Caribbean Inc. Esso Standard Oil S.A.

Ship's Chandlers: 3 ship's chandlers available.

Communications: Regular air services daily to London, New York and other European and American cities, and is therefore in excellent position to offer emergency facilities to vessels requiring urgent spares, crew replacements, etc. Vessels can anchor at Port Royal close by airport.

Customs: Vessels are searched thoroughly by Customs for *firearms* and contraband. Masters are held responsible by Customs for security of bonded stores, etc. Masters are therefore alerted to check security arrangements and to keep watch on bond whilst in port.

SERVICES: Compass adjusting services available. Although routine repairs to radar, radios and other electrical equipment are possible, technical services generally limited.

SHORE LEAVE: Crew members allowed on shore after vessel cleared by Immigration. Vessels arriving from some countries require special Government approval before shore leave permitted, but no restrictions are normally placed on vessels arriving from Western European, American or African countries.

REGULATIONS: Dogs are not permitted to land unless they have undergone quarantine or are imported from United Kingdom.

DELAYS: Normally there are no delays to vessels calling at the port.

AUTHORITY: Port Authority of Jamaica.

AGENT: Jamaica Freight and Shipping Co. Ltd., 80-82 Second Street, Newport West, Kingston 11. P.O. Box 167, Kingston, Jamaica. Tel. 923-9271-6 (six lines). Telex 2260. Cable address: Jashipco Kingston.

MONTEGO BAY: 18.30 N. 77.56 W. (See Plan Book)

DOCUMENTS, PILOTAGE and all general information: refer to "Kingston".

ANCHORAGE: There is one anchorage in Montego Bay which must be booked through the Harbour Master in Kingston. Depth 5 to 6 fathoms.

RESTRICTIONS: Entry – day and night. Rise and fall of tide, average range 10 in. No current in harbour. Main direction and speed of prevailing wind, N.E., 10 m.p.h. Subject in January–February to occasional 2–3 day spells of squalls with driving rain known as Northers which makes lying at the anchorage uncomfortable, but there is virtually no swell alongside the berths.

MAX. SIZE: Unlimited water at anchorage. The 1,500-ft.-long 400-ft.-wide straight channel has a min. depth of 34 ft. MSL, as does the 1,600 ft. diameter turning basin.

CLEARANCE: Customs, Health, Immigration offices are maintained at the port.

BERTHING:
Montego Freeport is a new port developed with 3 berths operated by Montego Wharves Limited, P.O. Box 303, Montego Bay.

Berth 2–600 ft. long, 34 ft. min. depth alongside, 7.5 ft above water line.

Berth 3–588 ft. long, 25 ft. min. depth alongside, 6.5 ft. above water line.

Berth 4–387 ft. long, 25 ft. min. depth alongside, 6.5 ft. above water line.

These berths are reached through a 1,500 ft. long straight channel 400 ft. wide dredged to a min. depth of 34 ft. There is 23,000 sq. ft. warehouse and an 87,000 cu. ft. cold storage facility adjacent to berth 2 with a wharf apron of 75 ft. Berths 3 and 4 are designed for roll-on/roll-off with 13 acres of bonded storage space adjacent. Berth 4 is used principally by cruise ships and is connected to a 5 acre duty free shopping complex by a 200 ft. long tree-lined walkway.

Montego Freeport Limited intends to build berth 1 in the next few years which will be a continuation of berth 2, creating 1,300 ft. of continuous berth face with ample space behind for expansion. The cold storage is planning on doubling its capacity.

TANKERS: No specific requirements applicable to oil carriers. Reducers available to fit 12 in.–4 in. load/discharge lines. Slop (residue) discharge facilities available taking maximum 500 gallons. One tanker berth, berth No. 2 minimum depth alongside 34 ft. MSL. Gas-free certificate required for tankers laying alongside.

DENSITY: Average density 1026. No tide.

FUEL: All grades (viscosities) available. At least four days notice required.

FRESH WATER: Can be supplied from the dock. 30 t.p.h.

MEDICAL: All facilities at St. James's Hospital.

SECURITY: Under the jurisdiction of the Montego Bay Police and also 24-hour patrols in the port area by private security guards.
CONSULS: No consular offices in Montego Bay. See "Kingston".
STEVEDORES: The Port is open 24 hours of the day. To enable Agents to order gangs, it is important to obtain accurate ETA from vessels. Time: 1200 hrs. the day before the vessel arrives. Shifts: 0700–1400 hrs., 1400–2100 hrs. Mondays to Fridays with option to extend the first shift to 1700 hrs. at single time; 0700–1200 hrs. Saturdays, thereafter at overtime. Details can be obtained from Montego Stevedoring Limited, P.O. Box 303, Montego Bay.
FIRE PRECAUTIONS: Equipped fire engines situated within easy reach of docks 24 hours per day.
IDENTIFICATION CARDS: Recommended for crew.
REPAIRS: There are no dry dock facilities, but minor repairs can be effected alongside.
AIRPORT: 5 miles from port. Donald Sangster International Airport served by regular airlines.
POLICE/AMBULANCE/FIRE: Police, tel. 119; Ambulance, tel. 110; Fire, tel. 110.
AUTHORITY: Montego Freeport Limited.

OCHO RIOS: 18.25 N. 77.07 W.

GENERAL: Reynolds Jamaica Mines must act as Agents for all vessels using the pier at Ocho Rios. *(a)* Tel. Ocho Rios 603. *(b)* Cable address is "Mines" Ocho Rios, Jamaica. *(c)* 72 hour and 24 hour ETA requested. *(d)* Radio telephone 2738 Kc/s open when calls expected at 0700, 1100, and 1500 hrs. local zone time.
PILOTAGE: Compulsory. Pilot meets vessel 1 mile N.E. of sea-buoy. On rare occasions when a local Pilot is not available expenses and detention must be paid for an outside Pilot.
MAX. SIZE: Max. LOA 850 ft. depth alongside pier 40 ft.
FRESH WATER: 50 c. per ton supplied from pipe-lines on the pier.
FUEL: Bunker "C" Fuel Oil – daily prevailing rate Kingston Harbour. Diesel Fuel Oil – per oil company suppliers Kingston.
REGULATIONS: (1) If any captain of any vessel or any other person shall throw or deposit, or permit to be thrown or deposited *(a)* any rubbish, earth, mud, stone, sand, ballast or other similar matter; or *(b)* any oil or mixture containing oil or oil residues, in any channel leading into or out of any harbour, or in any place within the limits of any harbour other than such place therein as shall be set apart for such purpose he shall be liable to a penalty not exceeding one thousand pounds. (2) No siren or steam whistle shall be sounded on any vessel in any harbour except for the purpose of making signals as laid down in the regulations for preventing collisions at sea, provided that any vessel may sound one warning blast of not more than five seconds duration before sailing. Any person committing a breach of the rules is liable for a penalty not exceeding 1,000 Dollars.
CARGOES: The Reynolds Jamaica Mines Pier is occupied about twice each week by ore carriers for 8 to 12 hours and about twice a month by sugar ships for indefinite periods.
TOURIST VESSELS: Tourist ships are accepted at Ocho Rios without Ministry of Finance approval in accordance with verbal instructions of the Collector at St. Ann's Bay, 19th September 1966, subject to the availability of berth at Reynold's option and: *(a)* Any guarantee to be only for Monday through Friday and for the hours 0700 to 1800. *(b)* Ocho Rios must be the first port of call in Jamaica of the ship on any particular voyage. *(c)* Signature of release form.
PASSENGERS: *(a)* Passengers disembark via shore gangways (2 if requested) direct to wharf situated in fence enclosed compound with guarded gate. Where lighterage is required a landing is available at the back of the wharf sufficiently large to be used by a 45 ft. tug. *(b)* Entry and clearance by Customs and Immigration are made at the pier. *(c)* Taxis are kept outside the gate. *(d)* Normally the Ocho Rios Chamber of Commerce set up a table on the wharf for the purpose of providing information and distributing literature on local musical groups to spend some time playing on the wharf for the benefit of the passengers.
AGENCY: *(a)* Normally Reynolds Jamaica Mines acts as sub-agent in Jamaica for vessels calling at Ocho Rios and bills for disbursements are directed to the Island agent for payment. *(b)* In cases where Reynolds Jamaica Mines acts as sole Agent for a vessel, a sum of money adequate to cover vessel's disbursements is requested from the owner or charterer to be deposited to Reynolds Jamaica Mines' account in advance.

PORT ESQUIVEL: 17.53 N. 77.08 W. (See Plan Book)

DOCUMENTS:
6 Crew Lists.
6 Passenger Lists.
Customs Documents:
4 Stores Lists.
Crew's Manifest of Declaration outside of Personal Effects.
4 Load Line Certificates.
4 Small Parcels Lists.
4 Customs Clearance from last port of call.
Fire Arms List.
Narcotics List.
List of live animals and meats on board vessel.
Health Documents:
International Certificate of Vaccination of all Crew members.
Maritime Declaration of Health.
Crew's Declaration of Health.
6 Manifests.
4 Bills of Lading.
Ship's Documents:
3 Stowage Plan of Cargo.
2 Deadweight Survey (Bulk carriers only).
Charter Party and any other specific documents of instructions relating to the loading or discharging of cargo.

PILOTAGE: Pilotage compulsory. Compulsory pilotage limit 2 miles to seaward of line drawn from Polink Point to Bare Bush Cay to Portland Cay to Portland Point. Cable advice 48 and 24 hours ahead of vessels ETA at Pilot station must be sent to vessel's Agent at Kingston, Jamaica.

One pilot boat *Silver Spray,* launch equipped with ship-to-shore radio communication: *(a)* One Marconi VHF – FM 30-watt output multi-channel set. *(b)* One Marlin HF – AM 75 output multi-channel set.

7/78 ok

VHF shore set manned 24 hours per day. Contact with Port or launch can be made on three international Channels – 16, 2 and 6.
ANCHORAGES: A. Seaward to East of Pilot station, depth in excess of 36 ft. B. Leeward of Pigeon Island – depth 36 ft. min. C. Eastward of entrance of main channel – depth 37 ft. 06 in. min.
RESTRICTIONS: Restriction of permissible draft to max. of 35 ft.
MAX SIZE: Max. permissible length 650 ft. and draft 35 ft. at low tide.
HEALTH: Pratique procedure requires presentation of undermentioned health documents: *(a)* International Certificate of Vaccination of all crew members. *(b)* Maritime Declaration of Health. *(c)* Crew's Declaration of Health. In event any suspected communicable disease or fever on board, Master required to advise Agents in advance.
RADIO: JAMINTEL "KNRDO 6YI".
TUGS: Pilot boat will be on standby during berthing operations of all vessels to assist in placing ship's lines on to pier.
BERTHING: Facilities for 2 berths – Eastern side and Western side of pier. Alumina bulkloading facilities on Western berth, rate 35,000 tons in 38 hours. Bulk alumina vessels given priority on Western berth. Both sides of pier used otherwise for vessels handling general cargo, loading or discharging fuel oil, caustic liquor, etc. Length of pier, East side 550 ft., West side, 600 ft.

Dolphin constructed at Head of pier for convenience of vessels turning around on arrival and departure. Dimensions 35 ft. long by 80 ft. wide. Additional berth, 250 ft. long, South-Western shoreline, with max. permissible draft of 17 ft. for this berth only.
SPECIALISED CARGO HANDLING FACILITIES: Eastern and Western berths equipped to handle receival of bulk cargoes, e.g. grain, soya meal, soya beans, salt, sulphur, etc., by using shore crane with grabs, vacuvators, vessel discharging by grabs or conveyor system. Bulk liquid chemicals handled as shown under "Tankers". Additional berth on South-Western shoreline now being used to handle small bulk grain, soya meal and soya bean carriers, and can be utilised for handling of roll-on/roll-off traffic and containerised cargo.
STEVEDORES: Cable advice to Agents in Kingston, Jamaica, 48 and 24 hours ahead of vessel's ETA at Pilot station for arrangements to provide stevedore and dock labour.
MEDICAL: Agents to be advised 48 hours ahead of vessel's ETA Pilot station of medical attention required, details of inoculations, vaccination/fever certificates, etc. Free ambulance service provided. Nearest hospital approximately 15 miles.
TANKERS: Both sides of pier equipped to handle receival and delivery of Bunker C oil, caustic liquor, sulphuric acid and molasses. Diameters of the load/discharge lines are:

Bunker C Oil	8 in.
Caustic liquor	10 in.
Sulphuric acid	4 in.
Molasses	12 in.
Water	4 in.

Max. permissible draft 35 ft.
DENSITY: 1025 subject to slight variation during heavy rainfall.
FRESH WATER: Max. of 300 metric tons available. Delivery made from storage tank at a rate of 40 to 50 metric t.p.h.
FUEL: Bunker C fuel oil is available from dock. Application to be made to Esso (W.I.) Ltd., through ship's Agent for supply of bunkers. Pumping rate approx. 130 metric t.p.h. Specification – Group 0 or Group 1 – Viscosity SSF at 122° F; 180–180 Flash P – M 190°F plus. Arrangements to supply other grades of fuel oil can be made on request of local Agents to Esso.
FIRE PRECAUTIONS: Strategically located fire hydrants throughout port and on pier. No special precautions apart from "No smoking" rule.
GANGWAY/DECK WATCHMEN: Service of watchman optional but not necessary. During time vessel is in port there is Customs guard on pier and strict security measures are carried out by port Security Force on personnel entering or leaving port compound which is surrounded by a chain-link security fence.
OPENING/CLOSING HATCHES: For bulk alumina vessels, opening and closing of hatches is done by crew members. For general cargo vessels, opening and closing of hatches may be done by crew members or on request to Agents, by stevedores.
SHIP CERTIFICATES:
Load Line Certificate.
Registration Certificate.

CUSTOMS ALLOWANCES: Tobacco: Each crew member including ship's officers, normally allowed by local customs authority 2 oz. of tobacco or 2 pk. of 20 or 25 cigarettes per day released from bond. Wine and/or Spirit: No limitations to use of wine on board. For spirits each crew member is allowed a part bottle per man.
CARGO GEAR: Local Agents provide necessary cargo gear. These are tested every 6 months in accordance with Factory Law and certificates issued for respective maximum lifting capacities.
IDENTIFICATION CARDS: Not necessary as the Passport will serve this purpose.
CONSULS: No consuls are available. Consular offices are located in Kingston approximately 30 miles away.
REPAIRS: Limited repairs may be undertaken.
DRY DOCKS: None.
REPATRIATION: Upon request, local Agents arrange crew changes and any necessary repatriation.
AIRPORT: Norman Manley International Airport approximately 40 miles away.
TIME: GMT minus 5.
HOLIDAYS: New Year's Day (1st January); Ash Wednesday (in accordance with calendar); Good Friday (in accordance with calendar); Easter Monday (in accordance with calendar); Labour Day (23rd May); Independence Day (first Monday in August); National Heroes Day (third Monday in October); Christmas Day (25th December); Boxing Day (26th December). These holidays are sometimes subjected to change in accordance with Government Proclamations.
1. No work is carried out on Good Friday and Christmas Day.
2. Work on vessels loading bulk alumina and discharging Bunker C oil and caustic liquor is usually carried out on other public holidays.
3. For general cargo vessels work is optional on public holidays except Good Friday and Christmas day, and only carried out on Master's request or in accordance with Terms of Charter Party.
POLICE/AMBULANCE/FIRE: Old Harbour Constabulary tel. 983–2255; Old Harbour Fire Brigade tel. 983–2276. An ambulance service is available for any crew member requiring medical attention. Several qualified doctors within a 6-mile radius of port. There is also a fire station.
TELEPHONES: Facilities do not exist for placing of telephones on board ship other than Magneto telephones. International telephone services available and scale of rates is as per schedule listed in Jamaica Telephone Company's Directory.
GENERAL: Port normal working days Mondays-Fridays 0730 to 1630 hrs. Overtime in excess of 8 hours per day or 40 hours per week, Monday-Friday at time and a half normal rate; Saturday between midnight and midnight time and a half normal rate, double time for hours worked on Sundays and two and one half times for hours worked on public holidays, between midnight and midnight. Rail facilities exist on Western side of the pier. Distance from fender to centre of rail line 17 ft. 09 in. Ship chandlering or any other requirements may be acquired through local Agents.
SERVICES: Special services are limited. Arrangements can be made through vessel's Agents for the port or local contractors to undertake these jobs.
SHORE LEAVE: Crew members usually granted shore leave by Immigration Authority for period vessel remains in port. Immigration Authority can, however, withdraw permission of shore leave to any individual crew member who, in their opinion, may be a security risk.
REGULATIONS: No unusual regulations.
DELAYS: The normal delays in berthing, loading or discharging or bunkering can be expected when the two berths are occupied.
AUTHORITY: *(a)* Alcan Jamaica Limited, Port Esquivel. A division of Aluminium Company of Canada Limited (Inc. in Canada).
(b) The Port Authority, Kingston.
AGENT: See Jamaica Freight and Shipping Co. Ltd. Kingston.

PORT KAISER: 17.52 N. 77.37 W.

DOCUMENTS:
6 Crew Lists.
4 Stores Lists.
Declaration of Crew Personal Effects.
Customs Clearance from Last Port.
Maritime Declaration of Health.
Vaccination Certificates for all crew members.
Cargo Documents.

PILOTAGE: Compulsory. Pilot boards about 1 mile seaward of the jetty. International code Pilot signals used.
ANCHORAGE: Recommended 1.5 to 2 miles off end of finger pier from South to S.W.
MAX. SIZE: Tankers up to 40 ft. draft.
HEALTH: Pratique granted by customs officers who board on arrival, after Master has completed Maritime Declaration of Health, and Crew's Declaration of Health. All crew members require valid vaccination Certificates. In event of suspected disease or fever on board Agent should be advised full particulars by radio before arrival.
RADIO: "KNRDO 6Y1."
TUGS: None available.
BERTHING: Tanker berth at the end of a finger pier. Pier head is adequately fendered and a holding off buoy is utilised if necessary because of swell. Vessels berth portside to the jetty. Both anchors used.

Finger pier is 610 ft. long. The berth is being dredged to 50 ft. depth.
TANKERS: Fuel and gas oil discharged, 8 in. hoses. No slop facilities.
DENSITY: 1025.
FRESH WATER: Not available.
FUEL: Not available.
CUSTOMS ALLOWANCES: 25 cigarettes and part bottle spirits per day per man.
CONSULS: Nearest at Kingston.
SHORE LEAVE: Allowed.
SHIPMASTER'S REPORT: October 1978.
Documents:
6 Crew Lists.
3 Store Lists.
2 Curio Lists.
1 Vaccination List.
1 Maritime Declaration of Health.
Load Line Certificate.
De-Rat Certificate.
Clearance from Last Port.
4 Notices of Readiness.

Pilotage: Pilot available and compulsory. Pilot station 1 mile S.W. of Pier.
Restrictions: Day and night berthing possible.
Max. Size: LOA, 650 ft. Beam 90 ft. Max. draft 36 ft.
Tugs: No tugs available. In an emergency nearest tugs at Kingston.
Berthing: Length of pier 700 ft. 1 shiploader, max. outreach 90 ft. and max. clearance under loader 46 ft. 2 shoots load 1 hatch (port and starboard). Loader movable along dock for 600 ft. Max. loading rate 1,100 short t.p.h. or 25,000 tons daily for bulk carriers. Loading carried out 24 hours a day.

Berth not very satisfactory in heavy swell and ships side rails are very prone to damage when loaded as large fenders (tractor tyres doubled up) hang over main deck and damage rails. Stevedores refuse to accept this damage.

Vessel only broke 1 mooring rope. Shore gangway used, of light aluminium construction which must be tended throughout. A hazard to get ashore or onboard.

When strong Westerly current running and Easterly winds blowing, Pilot informed me that it sometimes takes up to 7 hours to berth ships. When very heavy seas running, it is best to leave berth and return when weather improves.
Medical: 2 hospitals at Mandeville but seamen usually sent to Nursing Home.
Tankers: Fuel oil, diesel oil, sodium sulphate, caustic soda and sulphuric acid handled at the tanker berth.
Density: 1025–1026.
Fresh Water: Not available.
Fuel: Not available.
Time: GMT minus 5 hours. Except during Daylight Saving Time GMT minus 4 hours.
Repatriation: Reliefs and repatriation can be arranged through Kingston which is about 87 miles away by road. Reliefs flying out through Miami all lost their luggage for a while as it was booked right through to Jamaica. Advisable to book luggage to Miami, collect and clear through Customs and then re-check it in. U.S. visa also required even for transit through U.S.A.
Current: Usually Westerly at 2.5 to 3 knots.
Tidal Range: 1.5 ft.
Publications/Charts:
BA 260 Pedro Bank to the South Coast of Jamaica.
BA 258 Ports and Anchorages on the South Coast of Jamaica.
BA 446 Jamaica.
USA 26124 Portland Bight to Great Pedro Bluff (with plan of Port Kaiser).
NP 70 West Indies Pilot (N.W. Part) Vol. 1 with Supp. No. 4.

Tugs: The current runs at right angles to the steel girder type berth on stilts and makes it difficult to get the stern alongside so a powerful tug would have been of great assistance.
Working Hours: Office hours 0800–1600 but 24 hours when vessel in port.
Officials: Customs, Quarantine and Immigration officials boarded on arrival. The Quarantine official lives on board whilst vessel in port to ensure nothing is thrown into the sea.
Survey: Holds surveyed before loading for cleaniness and Certificate of Cleanliness issued. Draft survey taken before and after loading (6 ft. swell and rough seas at the time).
Laundry: Can be arranged but takes 2–3 days.
Provisions: Fresh provisions available from nearest country market at Mandeville. Market days – Wednesday, Friday and Saturday. Main stores can be ordered from Kingston but very expensive and trucking charge $150.
VHF: Channel 16 said to be monitored in Agents office at Port Kaiser, pilot boat and Dock Office Port Kaiser but not able to make contact when inbound.
AUTHORITY: Port Authority of Jamaica.

PORT RHOADES, Discovery Bay: 18.29 N. 77.24 W.

(See Plan Book)

DOCUMENTS:
5 Crew Lists.
2 Stores Lists.
1 Customs Clearance from last port.
2 Declaration of Crew Personal Effects.
1 Maritime Declaration of Health (available on arrival).
Vaccination Certificates for all crew members.
1 Copy of each cargo document.

PILOTAGE: Compulsory. ETA's should be cabled to "Kaisbaux Discovery Bay", 48, 24, and 12 hours before arrival.

Pilot will board vessel on arrival 2 miles outside channel, if berth is available.

ANCHORAGES: No designated anchorage. If berth is occupied, vessels will remain within a 3-mile area of the channel until berth is available. Docking instructions are given by VHF.

RESTRICTIONS: Entry may be at any time of day or night throughout the year.

MAX. SIZE: Max. permissible length, 660 ft.
Max. permissible breadth, 90 ft.
Max. permissible draft, 37 ft. 06 in.

PRATIQUE: Pratique inspection and clearance given on berthing. Notify "Kaisbaux, Discovery Bay" as soon as possible before arrival full details of any suspected disease or fever on board.

There is no radio pratique.

RADIO: Route all ETA's and cables via Kingston Radio or nearest radio station.

VHF: Channel 16, 24 hours a day. Channels 12, 13, 26 and 28 also available. Range 30 miles.

TUGS: None available. Pilot launch will assist in taking ship's lines during docking if required.

BERTHING: One finger pier, (position 18° 28′ 45″ N. 77° 24′ 20″ W.) adequate fenders, used by bauxite ships and tankers alike.

Ships loading bauxite must dock with the top of the hatch covering of the first hold to be loaded not more than 35 ft. above sea level.

Bauxite loading rate 4,000 t.p.h.

All loading hatches to be opened for inspection if weather permits.

Gangway to be rigged ready for lowering immediately on berthing.

STEVEDORES: All arrangements are made by Kaiser Bauxite Company for unloading/loading any general cargo.

MEDICAL: Medical facilities and hospital available in the vicinity.

TANKERS: Two fuel lines, hose 8 in. (pipe-line 12 in.) diameter. Back pressure 150 lb. One gas oil line, hose 8 in. (pipe-lines 6 in.) diameter. Back pressure 150 lb.

Tankers use same berth as bauxite vessels. It may be necessary at times for tankers to wait on bauxite vessels loading, or arriving, and tankers may have to vacate the berth before completion of discharging to make way for bauxite vessels which have absolute priority.

DENSITY: 1025.

FRESH WATER: Not available.

FUEL: Not available.

FIRE PRECAUTIONS: Usual non-smoking precautions with respect to tankers. Portable fire extinguisher available on pier.

GANGWAY/DECK WATCHMEN: To be provided by vessel.

OPENING/CLOSING HATCHES: To be done by ship's crew.

CERTIFICATES REQUIRED:
Load Line Certificate.
Registration Certificate.
Derating Exemption Certificate.

CUSTOMS ALLOWANCES: Tobacco: Each crew member, including officers, normal allowance 2 oz. tobacco or 2 pks. of 20 cigarettes per day released from bond. Wine: no limitations on use of wine on board. Spirits: Officers only are allowed part bottle.

IDENTIFICATION CARDS: Not required.

CONSULS: Nearest Consuls are in Kingston, 80 miles distant.

DRY DOCKS: No facilities in Jamaica for other than the smaller types of vessel (e.g. tug).

REPATRIATION: Can be arranged through ship's Agent.

AIRPORT: Montego Bay, 40 miles away; Kingston, 90 miles away.

Both are international airports, with several scheduled flights per day to U.S.A. and Europe.

TIME: GMT minus 5 hours.

TELEPHONES: No arrangements for ship-board connections.

AUTHORITY: Kaiser Bauxite Company, Discovery Bay, Jamaica.

SALT RIVER: 17.50 N. 77.10 W.

DOCUMENTS: Health Certificate. Crew List. Manifest. Bills of Lading and other ship's papers for cargo shipped, prepared by Wisco Wharves Limited, a subsidiary of The West Indies Sugar Company Limited.

PILOTAGE: Latest 12 hours prior arrival off Pilot station. Cable "Monymusk Lioneltown" giving name of vessel, ETA, date of arrival. Pilotage – optional, Barebush Cay; Compulsory, Pigeon Island; pilot boat at Salt River.

ANCHORAGE: 17° 49.58′ N.; 77° 8.40′ W.

RESTRICTIONS: No restrictions.

MAX. SIZE: Draft 30 ft.

HEALTH: Customs grant pratique.

RADIO: Cable Agents via Kingston Radio/6YI.

TUGS: Not applicable.

BERTHING: No berthing facilities.

STEVEDORES: 48 hours notice prior arrival of vessel. Commodity bulk sugar. Loading rate approximately 1,800 tons per day.

MEDICAL: No advance notice required.

FRESH WATER: Can be arranged if given sufficient notice.

FUEL: None available at port but can be arranged.

GANGWAY/DECK WATCHMEN: Customs guards.

OPENING/CLOSING HATCHES: Normally done by crew.

SHIP CERTIFICATES: Registered tonnage certificate on first call. Master's and Chief Engineer's certificates of Competency, also Loading Line Certificate.

CUSTOMS ALLOWANCES: Tobacco, determined by Customs. Wine and/or Spirit, determined by Customs.

IDENTIFICATION CARDS: Not required.

CONSULS: None.

REPAIRS: Not possible.

REPATRIATION: Can be arranged.

AIRPORT: Palisadoes International approximately 50 miles away and served by regular airlines.

TIME: GMT minus 5 hours.

HOLIDAYS: New Year's Day; Ash Wednesday; Good Friday; Easter Monday; Labour Day (23rd May); National Heroes Day; Independence Day; Christmas Day (25th December); Boxing Day. Work can be arranged on all public holidays except Good Friday and Christmas Day.

POLICE/AMBULANCE/FIRE: Police Vere 233; Ambulance Vere 337; No port fire brigade.

TELEPHONES: Radio communication ship to wharf can be arranged.

SHORE LEAVE: Crew members are allowed ashore.

DELAYS: Delays can be expected.

AUTHORITY: The West Indies Sugar Co. Ltd.

AGENT: The West Indies Sugar Company Limited, 5 Trevennion Park Road, PO Box 174, Kingston 5, Jamaica, W.I. Tel. 65927–8. Telex 13. Cable address: Head Office: "Wisco Kingstonja". Home Office: "Monymusk Lioneltown".

SAVANNA LA MAR: 18.12 N. 78.09 W.

DOCUMENTS: Declaration of Health Certificate forms obtainable from Supercargo. 4 copies Crew List, Stores List. Manifest, Bills of Lading and other ship's papers for cargo shipped prepared by Sugar Shipping Limited, a subsidiary of The West Indies Sugar Company Limited.

PILOTAGE: Latest 12 hours prior arrival off Pilot station. Cable "Wicaroo Frome" giving name of vessel, ETA, date of arrival, cash required. Diesel powered 88 h.p. launch painted black hull, red deck, white wheelhouse. District – Compulsory and Optional.

ANCHORAGE: 18° 11.27′ North; 78° 8.20′ West.

ENTRY RESTRICTIONS: No night entry or sailing.

MAX. SIZE: Draft 19 ft.

HEALTH: Maritime Declaration of Health prepared by Master and lodged with Customs. MOH is notified of any suspected illness and action taken. Pratique automatic.

RADIO: Cable Agents via Kingston Radio 6YI.

TUGS: Not applicable.

STEVEDORES: No particular ETA advice required. Commodity, bulk sugar. Average loading rate 1,500 tons per day.

MEDICAL: No advance notice required. Hospital facilities available. Smallpox vaccination by MOH and certificate issued.

FRESH WATER: No facilities.

FUEL: No port facilities, but can be arranged.

GANGWAY/DECK WATCHMEN: Customs guards.

OPENING/CLOSING HATCHES: Normally done by crew.

SHIP CERTIFICATES: Registered tonnage certificate on first call. Master's and Chief Engineer's Certificates of Competency, also Loading Line Certificate.

CUSTOMS ALLOWANCES: Tobacco, determined by Customs. Wine and/or Spirit, determined by Customs.

CARGO GEAR: No additional requirements. In use, grabs operated by ship's winches.

IDENTIFICATION CARDS: Not required.

CONSULS: None.

REPAIRS: Not possible.

REPATRIATION: Can be arranged.

AIRPORT: Montego Bay International approximately 32 miles away and served by regular airlines.

TIME: GMT minus 5 hours.

HOLIDAYS: See "Kingston".

POLICE/AMBULANCE/FIRE: Police Savanna la Mar 621; Ambulance 533; Fire 666 and 540.

TELEPHONES: Radio communication ship to wharf can be arranged during day only.

SHORE LEAVE: Crew members are allowed ashore.

DELAYS: Delays can be expected.

AUTHORITY: The West Indies Sugar Co. Ltd.

AGENT: The West Indies Sugar Company Limited, 5 Trevennion Park Road, PO Box 174, Kingston 5, Jamaica, W.I. Tel. 65927–8. Telex 13. Cable address: Head Office: "Wisco Kingstonja". Home Office: "Wicaroo Frome".

Japan

GENERAL: *Radio Pratique:* At ports where Radio Pratique is possible, vessels must be in possession of the Japanese Sanitary Inspection Certificate to obtain Radio Pratique and night-time entry. The certificate is only obtainable in Japan and is valid for 1 year.

Pollution: Effective 1975, the Marine Pollution Prevention Law requires any tanker of 150 tons gross and above which is loaded with an oil cargo to have materials for oil removal either on board, or aboard escort boats, or at a depot base. Depot bases are understood to have been established, and in this connection Owners, Time Charterers, or Masters are strongly recommended to contact their Agents at least 10 days prior to vessels' arrival Japan.

Requirements of Travelling Documents to Japan for Crew/Superintendent:

Crew Joining vessel

Max. Stay ashore	Travelling Document	Visa	Remarks
(1) Ordinary Case			
within 5 days	Seaman's Book or Passport	No	Special Landing Permit issued but valid for crew travelling direct to port where crew join ship.
over 5 days	Passport	Req'd	See names of Countries for which visa exempted
(2) New building			
within 30 days	Seaman's Book or Passport	No	See (1) Remarks
over 30 days	Passport	Req'd	See names of Countries for which visa exempted
(3) Purchase/Delivery			
Crew arrival before ownership changed within 10 days	Seaman's Book or Passport	No	Max. 10 days stay ashore permitted subject to Agents' submission of Sale of Contract and Export Licence. See (1) Remarks
Crew arrival before ownership changed over 10 days	Passport	Req'd	See names of Countries for which visa exempted
Crew joining ship before ownership changed	Passport	Req'd	See names of Countries for which visa exempted
Crew arrival after ownership changed	Same as (1) Ordinary case		
Superintendent			
(4) All cases	Passport	Req'd	See names of Countries for which visa exempted

Names of countries for which visa not required:

Within 30 days New Zealand.

Within 90 days Argentina, Bangladesh, Belgium, Canada, Chile, Colombia, Costa Rica, Cyprus, Denmark, Dominican Republic, El Salvador, Finland, France, Greece, Holland, Honduras, Iceland, Iran, Israel, Italy, Luxembourg, Malta, Norway, Pakistan, Peru, Portugal, San Marino, Singapore, Spain, Sweden, Tunisia, Turkey, Uruguay, Yugoslavia.

Within 180 days Austria, Federal Republic of Germany, Ireland, Mexico, Switzerland, United Kingdom.

Remarks: The above schedule is made out by Dodwell Tramp Agencies on general understanding with Immigration Authorities. However, the above details are not expressly stated in the text of the law but based on Immigration Control Order Article 16 which reads: Article 16. Permission for landing for Reshipping.

1. The Immigration Inspector may, in case an alien crewman desires to pass through Japan in order to reship on board another vessel in another port of entry in Japan, upon application of the carrier operating the vessel on which the alien crewman has arrived, and in case the alien crewman desires in order to become a crewman of a vessel in Japan, to land from another vessel, etc. and pass through Japan, upon application of the carrier operating the vessel in Japan, permit the landing for reshipping respectively.

2. In case the permission provided for in the preceding paragraph is given, the Immigration Inspector shall issue a permit for landing for reshipping to the crewman concerned.

3. In case the permission provided for in paragraph 1, is given, the Immigration Inspector may impose upon the crewman such restrictions regarding period of stay in Japan, route to be followed in transit, and any others which he may deem necessary in accordance with Ministry of Justice Ordinance.

In view of the foregoing, the contents of the schedule is not absolute and may be altered. In order to ensure that crew members are permitted to land Japan to join ships, please send Agent information well in advance on personal data of crewmember such as Full Name, Rating, Date of Birth, Passport or Seaman's Book Number together with Flight No. and Ship's ETA/calling port.

PILOTAGE: It is *compulsory for vessels over 10,000 g.r.t.* to take a Pilot to navigate the Uraga Channel. Application for this Pilot service must be made 24 hours and 6 hours in advance of actual ETA to the Uraga pilot station. At the same time compulsory pilotage has been extended to certain other areas in Tokyo Bay.

SHIPMASTER'S REPORT: August 1978.

It is possible to have the latest changes in ETA relayed by VHF to Inland Sea Pilot stations, for:

1. Wadamisaki via Kobe Port Radio on Channel 16, call "Kobe-Port", or Osaka Port Radio on Channel 16, call "Osaka-Port".
2. Sekisaki via Oita Port Radio on Channel 16, call "Oita-Port".
3. Hesaki, via Shimonoseki Port Radio on Channel 16, call "Shimonoseki Port".

These stations are very cooperative and they immediately give the latest information concerning boarding-time and place, as well as requirements concerning the pilot ladder.

AIOI: 34.46 N. 134.28 E. (See Plan Book)

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists, including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist watch, radio, firearms/swords, etc., (only at first port of call in Japan).

Ship's Agents will prepare: Inward/Outward Declaration. 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agents should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Inland Sea Pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to Pilot station. Inland Sea Pilot Association covers all inland sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from one of three Pilot stations dependent upon vessels last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations. Also see "Shipmaster's Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits). Position 34° 38′ N.; 135° 11′ E. Telegraphic address: "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse. (Vessels transitting Bungo Channel.) Position 33° 13′ N.; 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimonoseki) Straits. Position 33° 56′ 24″ N.; 131° 03′ 12″ E.

Aioi Dock Master not licensed to pilot vessels from outer harbour and boards at anchorage.

ANCHORAGES: Inside Aioi Bay. Max. 18 ft. draft.

A. True bearing 250° from Kabeshima post, distance 350 m.
B. True bearing 217° from Kabeshima post, distance 730 m.
C. True bearing 313° from Kasamatsu Iwa bench mark, distance 620 m.

RESTRICTIONS: Vessels may anchor any time day or night. Draft to be adjusted to enter dry dock per dockyard recommendation as follows:

Name of Dock	*Trim Recommendation*
No. 1 & 2 Dry dock	$\frac{\text{Vessel's LOA (mm.)}}{200}$ plus 500 mm.
No. 3 Dry dock	$\frac{\text{Vessel's LOA (mm.)}}{300}$ plus 500 mm.

MAX. SIZE: Max. size of ships to be accommodated as follows:

Dock	*LOA*	*LBP*	*Breadth*	*Draft*	*d.w.t. (LT)*
No. 1	238 m.	230 m.	33 m.	5.5 m.	73,000
	780 ft. 9 in.	754 ft. 7 in.	108 ft. 3 in.	18 ft.	
No. 2	156.1 m.	145 m.	19.5 m.	5.5 m.	14,000
	512 ft. 1 in.	475 ft. 8 in.	63 ft. 11 in.	18 ft.	
No. 3	341 m.	328 m.	54 m.	6.0 m.	300,000
	1118 ft. 9 in.	1076 ft. 1 in.	177 ft. 1 in.	19 ft. 8 in.	

HEALTH: Pratique to be obtained at another Port prior arrival Aioi.

At first port of call in Japan, vessel must obtain free pratique. Quarantine officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards and Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers health condition to respective Quarantine Office through ship's Agents prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agents through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi and Northbound to Nagasaki Radio respectively.

TUGS: Normally join vessel at anchorage inside Aioi Bay. Tug's lines always used without charge.

TANKERS: Must be fully gas-freed before arrival. No facilities for tank cleaning or gas freeing.

DENSITY: Average 1025/1026 Winter, and 1018/1020 Summer.

FRESH WATER: Available from jetty/dock.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at max. 7 days prior notice.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore, but no spirits.

CONSULS: None.

REPAIRS: Dockyard port. All repairs available. Specialist technicians obtainable from Kobe/Osaka area.

AIRPORT: Osaka (Itanii).

TIME: GMT plus 9 hours. Permanent.

POLICE/AMBULANCE/FIRE: Police 07912 or Aioi 2–0740; Ambulance/Fire 119 or Aioi 2–7128.

TELEPHONES: Placed aboard at IHI shipyard.

SERVICES: No special services at Aioi, but available from Kobe/Osaka.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Kamigori Doboku (Public works) Office.

AGENTS: See "Himeji"

AKITA: 39.45 N. 140.03 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
5 Crew Lists including Passport Nos.
5 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist watch, radio, firearms/swords (only at first port of call in Japan).

Ship's Agents will prepare Inward/Outward Declaration 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Ships Agents should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory but recommended, available daylight only. Boards off Akita 1 mile 280° from Akita lighthouse or off Funakawa 1 mile 140° from breakwater end light if required. 2 Pilots board if ship's gross tonnage exceeds 18,000. Cost 180% of pilotage.

ANCHORAGE: Off Akita, 2 miles 280° from Akita Lighthouse. Depth exceeds 20 m. Bottom – soft clay with mud. No buoys.

RESTRICTIONS: Pilot available daylight only.

MAX. SIZE: Max. draft available 9.6 m. in fairway. Size at berths, see "Berthing" Min. depth at extreme low water – In fairway – 10.0 m. At Anchorage – 20.0 m.

HEALTH: Officer stationed at Funakawa. Quarantine anchorage 39° 51′ N. 139° 53″ E. When impossible to inspect at Funakawa, i.e. during bad weather, attends off Akita.

RADIO: Niigata Radio when ship coming from South. Sapporo Radio when ship coming from East/North. Choshi Radio if long distance.

VHF: VHF Channel 16–156.8 mc/s. VHF Channel 12–121.5 mc/s. Operated by Regional Maritime Safety Headquarters – Harbour Master.

TUGS: 1 tug 2,000 h.p. available owned by local government. 1 tug 800 h.p. and 4 small tugs (150-250 h.p.) available, privately owned.

BERTHING:

Wharf	*Length (m.)*	*Depth (m.)*	*Berthing Capacity (g.t.)*	*Discharging*
Nakajima No. 1	160	9.0	10,000	Phosphate, Grain, Logs
Nakajima No. 2	185	10.0	15,000	Zinc Concentrates, Logs
Nakajima No. 3	185	10.0	15,000	Zinc Concentrates, Logs
North Pier	227	7.5	5,000	Coal, Potash, Ore, Logs
South Pier	227	5.5	3,000	Manure, Ore, Logs
Ohama No. 1	185	10.0	10,000	Logs
Ohama No. 2	235	10.0	15,000	Logs
Mukaihama No. 2	130	7.5	5,000	Logs
Mukaihama No. 3	185	10.0	15,000	Logs
Tohoku Seishi Chip Berth	210	10.0	35,000	Logs

STEVEDORES: Working time 0830–1630 hrs. every day.

Phosphate rock in bulk: 200–270 t.p.h. by shore crane, 50–70 t.p.h. by ship's gear.

Grain in bulk: 150–170 t.p.h. by shore crane, 40–60 t.p.h. by ship's gear.

Logs/lumbers: 200,000 BM per gang per day (Nanyozai), 80,000–100,000 per gang per day (Beizai).

Potash in bulk: 150–180 t.p.h. by shore crane, 50–60 t.p.h. by ship's gear.

Fertiliser in bag: 250–300 tons per day per gang.

Zinc concentrate in bulk: 140–160 t.p.h. by shore crane. 40–60 t.p.h. by Ship's gear.

MEDICAL: Hospital and treatment available.

DENSITY: 1020–1021. Tidal range 20/30 cm.

FRESH WATER: Available at every wharf. Rate 30 t.p.h.

FUEL: Domestic bunkers available. If bonded bunkers required, brought from Niigata, Hakodate.

GANGWAY/DECK WATCHMEN: Not compulsory, but available if required.

OPENING/CLOSING HATCHES: Stevedores open and close hatches. Cost per hour depending on cargo. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete before berthing.

CERTIFICATES: Ship's register to show Customs Inspector, ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance seems poor.

CUSTOMS ALLOWANCES: Only 50 cigarettes to take ashore. No spirits.

CONSULS: No Consuls, but 2 notary public offices.

REPAIRS: Minor repairs only.

REPATRIATION: Possible.

AIRPORT: Flights to Tokyo 2 or 3 times per day. 12 km. from port.

TIME: GMT plus 9 hours. No alterations during year.

HOLIDAYS: Local holidays: January 2nd, 3rd, July 21st, August 13th (p.m.), 14th, December 31st (p.m.) Other Sundays/Holidays Non working days.

POLICE/AMBULANCE/FIRE: Contact through Agents.

GENERAL: *Harbour Protection* – Breakwaters, South and North.

Weather Conditions past two years

	Spring	*Summer*	*Autumn*	*Winter*
Temp. on average	8.5°C	21.7°C	13.0°C	−0.5°C
Rainfall on average	122 mm.	171.3 mm.	120.5 mm.	133.5 mm.
Wind force and direction	4.0 E.S.E.	3.3 E.S.E.	4.1 E.S.E.	5.2 N.W.

Warehouse/Silo – 31 Warehouses/silos, area 28,450 sq.m. including fumigating warehouse/silos.

Stock Yards – 7 yards, 82,520 sq.m. for coal, ore, etc. 100,000 sq.m. for lumber/timber.

Services – Provisions – Available. Hold Cleaning – Available. Surveyor – from Funakawa/Niigata.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension if ship stays longer.

AUTHORITY: Akita-Kencho, Akita City.

AGENT: Sub-Agents of Dodwell & Co. Tokyo. Akita Kairiku Unso Co. Ltd. 5–9 Nishi 2-chome, Tsuchizaki-Minato, Akita-shi, Akita-ken. Tsuchizaki P.O. Box 8 Tel. Akita (0188) 45–0185/9. Telegraphic: "Kairiku Akita" Telex: 8422–24.

AMAGASAKI: 34.42 N. 135.24 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agents will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agents should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Usual for Pilot to embark at Kobe (Wada Point); however, if Master does not require a Pilot between Wada Point and Amagasaki, Pilot embarks off Amagasaki.

Cables: "Hanshinpilot Osaka" and "Hanshinpilot Kobe". One day's notice ETA required. Telephone through VHF. 3 Pilot boats at Osaka and 6 boats at Kobe with wireless communication with Pilot station. Pilot boards Kobe, Wada Point (Kobe quarantine anchorage). Amagasaki, 2.5–3 miles off Amagasaki. In case bad weather unable to take Pilot. Safe Pilot ladder required. Vessel waits for Pilot at anchorage as above.

ANCHORAGE: No quarantine anchorage; quarantine inspection only available at Kobe (Wada Point). Safe anchorage (approx.) position 34° 39′ 30″ N., 135° 20′ 18″ E. Draft 12.8 m.

RESTRICTIONS: Pilot not available after sunset.

MAX. SIZE:

	Kobe Steel Works (Ohgimachi Wharf)	*Kobe Steel Works (Ohama Wharf)*
Max. LOA	200.0 m.	176.81 m.
Max. breadth	No Limitation	No Limitation
Max. draft	11.70 m.	10.40 m.

	Public Wharf
Max. LOA	180.21 m.
Max. breadth	No Limitation
Max. draft	9.60

Daikyo Oil Jetty. Max. LOA 200 m., beam no restrictions, max. draft 10.6 m.

HEALTH: At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers

health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.
RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically West bound vessel to Choshi and North bound to Nagasaki Radio respectively.
TUGS: Tug usually joins vessel at anchorage off Amagasaki. Tug's line used for operation free of charge.
BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.
Public Berths:

No. 1	Length 170 m.	Depth 10 m.
No. 2	Length 185 m.	Depth 10 m.
No. 3	Length 158 m.	Depth 10 m.

CRANES: 2×10 ton cranes at the public wharves.
TANKERS: Daikyo Oil Jetty suitable for up to 33,000 d.w.t. Discharge rate 1,000 t.p.h. through one 14 in. pipe.
STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.
MEDICAL: No advance notice required unless urgent.
DENSITY:

	Ohgimachi Wharf	*Ohama Wharf*	*Public Wharf*
Winter	1023.5–1025.0	1020–1025	1025–1119
Summer	1022.0–1025.0	1013–1025	1017–1025

FRESH WATER: Available at any time.

	Kobe Steel Works Wharfs	*Public Wharf*
Methods	Shore line	Shore line
Sunday, Holiday	Daytime 40% up	40% up
	Before midnight 50% up	50% up
	After midnight 100% up	50% up

Daikyo Oil Jetty. Only available by barge from Kobe.
FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.

Bunkering at Oil Jetty prohibited.
GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

Compulsory for tankers working cargo at oil jetty.
OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.
CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.
CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.
CONSULS: No consulate in Amagasaki area.
REPAIRS: No dockyard. Minor repairs can be carried out on vessel alongside wharf.
REPATRIATION: Possible.
AIRPORT: International airport Osaka, 15 miles from Amagasaki.
TIME: GMT plus 9. No alterations made to clocks during year.
HOLIDAYS: Kobe Steel (Ore/Coal) Nil. Public Wharf (Scrap) 20th July.
POLICE/AMBULANCE/FIRE: Police 110; Ambulance 119; Fire 119.
TELEPHONE: No telephone installation service on board.
SERVICES: Compass adjustment can be carried out at anchorage.
SHORE LEAVE: Local Immigration Officers issue shore pass valid for only 3 days, but 3 days extensions possible if ship stays longer.
AUTHORITY: Port Administration Office.
AGENTS: Dodwell Tramp Agencies, Osaka. (see "Osaka".)

ANAN (Tachibana): 33.52 N. 134.40 E.

DOCUMENTS: and all general information, refer to "Shimotsu".
PILOTAGE: Not compulsory. Pilot can be arranged through Agent if required.
MAX. SIZE: Max. draft 10.50 m., limited by channel depth.
HEALTH: Closed port. If arriving directly from abroad, vessel should proceed to Shimotsu for health clearance. Immigration authorities attend from Komatsushima if required.
TUGS: One tug of 2,000 h.p. available.
BERTHING: Nippon Denko Wharf, 12 m. depth alongside. Unloading capacity 500 t.p.h.
FRESH WATER: Available from shore hydrants only.
FUEL: By barge from Hanshin area only.
AUTHORITY: Port and Harbour Department.
AGENT: See "Niihama".

AOMORI: 40.52 N. 140.45 E.

DOCUMENTS: and all general information, refer to "Hachinohe".
RESTRICTIONS: Day and night entry possible.
HEALTH: Free pratique granted at the anchorage.
TUGS: 2 tugs available, up to 800 h.p.
BERTHING:

Berth	*Length (m.)*	*Depth (m.)*	*Max. draft (m,)*	*Max. Size (g.r.t.)*
No.2 Wharf (2)	178	9.0	8.5	10,000
(3)	155	7.5	7.0	5,000
(4)	193	9.0	8.5	10,000
3,000 ton Pier	115	7.5	7.0	3,000
3,000 ton Pier	260	5.5	5.0	3,000
Tsutsumi Wharf	260	7.5	7.0	5,000
Aburakawa Lumber Port	200	4.5	4.0	5,000

CRANES: 2×35 tons, 2×18 tons and 1×13 tons.
FUEL: Can be supplied by barge from nearest stock port (Hakodate).
FRESH WATER: Available ex-wharf.
REPAIRS: Small repairs possible.
AUTHORITY: Port Administration Office.
AGENT: Sub-Agents of Dodwell & Co. Tokyo.
Narasaki Sangyo Co., Ltd., Hachinohe Branch, No. 3-3, 1-chome Numadate, Hachinohe-shi, Aomori-ken, Cable Address: Narasaki Hachinohe, Domestic Telex: 8229-60, Tel: (0178) 44-1433, Postal No.: 031.

ATSUMI: 34.40 N. 137.04 E.

DOCUMENTS, and all general information: refer to "Yokkaichi".
PILOTAGE: Compulsory; Pilot boards at the point 300° – 7 miles from Kamishima Lighthouse.
RESTRICTIONS: No possibility of passage through Nakayama Suido after sunset. However, vessels under 9 m. draft able to enter from Nojima South Passage.
MAX. SIZE: *Dolphin Pier:* 80,000 d.w.t., LOA 240 m., Max. draft 11.00 m.

SBM: 250,000 d.w.t., Max. draft 15.00 m.
CLEARANCE: *Quarantine:* Quarantine Office opened at Atsumi.

Immigration: Immigration Officials attending from Gamagori.
TUGS: Minimum 2 tugs required for mooring/unmooring due to strong current.
BERTHING: *Dolphin Pier:* Lat. 34° 39′ 36″ N. Lat. 137° 04′ 54″ E. 2.5 km from installation.

SBM: Lat. 34° 39′ 47″ N. Long. 137° 03′ 56″ E. 2 km from installation.

Shoreline: Dolphin Pier 2×12 in, discharge rate 1,000 t.p.h.
SBM 2×16 in, discharge rate 7,500 t.p.h.
FRESH WATER: At Dolphin Pier ex pipe-line (boiler water only). At SBM by barge.
FUEL: Bunkering permissible only at anchorage by barge.
DENSITY: 1025 at both berths.
AGENT: See "Yokkaichi".

CHIBA (including Yahata): 35.36 N. 140.07 E.

DOCUMENTS:

Ship's Register. Last Port Clearance. 3 Crew Lists including Passport Nos. 3 Passenger Lists. 1 Stores List.

1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agents will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.
PILOTAGE: Harbour Pilots are available at the anchorage. Vessels unfamiliar with the Uraga Channel are recommended by Maritime Safety Board to employ a Pilot who boards at Uraga Channel No. 1 light buoy. Tankers exceeding 100,000 d.w.t. and liquefied-gas carriers are strongly requested to observe this recommendation and also hire a guard boat.

Pilot not available after sunset.
ANCHORAGES: Quarantine anchorage on Northern part of Tokyo wan. Chart No. 1061, published by Maritime Safety Agency.

SIGNALS: Following signals exhibited at Chiba Lt. and Chiba Signal Station.

	By Night	*Remark*
Chiba Route	W. flash 2 secs.	Over 500 GT outwards — STOP.
	R. flash 2 secs.	Over 500 GT entering — STOP
	R. and W. flash 3 secs.	Over 10,000 GT entering or outwards — STOP.
	3R. and 3W. flash 6 secs.	Entering or outwards — STOP.
Ichihara Route	O G. O G.	Over 500 GT outwards — STOP.
	O R. O R.	Over 500 GT entering — STOP.
	O G. O R.	Over 10,000 GT entering or outwards — STOP.
	O G. O G. O R. O R.	Entering or outwards — STOP.

RESTRICTIONS: Chiba Harbour route. Depth of Water — 14.0 m. Width 250.0 m. Length 7,200 m.
Ichihara route. Depth 12 m. Width 250 m. Length 2,350 m.
Anegasaki route. Depth 16 m. Width 350 m. Length 1,450 m.

MAX. SIZE: See "Berthing".

HEALTH: Radio pratique available, requested through Agent. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera infected area within 10 days, Captain must advise crew and passengers' health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Chosi Radio or Nagasaki Radio which covers all ports in Japan. If specifically West bound vessel to Chosi and North bound to Nagasaki Radio respectively.

RADAR/VHF: No radar service. VHF call sign "Chiba Port Radio" Channel No. 12 156.6 mc/s (Simplex), Channel 14 156.7 (Simplex), Channel 16 156.8 (Simplex), Channel 20 161.6 (Duplex), Channel 22 161.7 (Duplex).

TUGS: Tugs join vessel at entrance of each waterway. Tug's line used.

BERTHING: Contact Agent for berthing arrangements on entry. No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Name of Berth		*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Capacity (d.w.t.)*	*Shore Cranes and Pipe-lines*
Toyo Seiyu Dolphin		160	12.0	12.0	50,000	Pneumatic U/L×1
Mitsubishi Mokuzai		180	12.0	12.0	50,000	Ship's gear
Keiyo Mokuzai		120	12.0	11.7	20,000	Ship's gear
Nisshin Seito Pier		150	12.0	12.0	25,000	Nil
Higashi Nihon Seito		150	12.0	12.0	20,000	330T Crane×2
Kyodo Silo Dolphin		150	12.0	12.0	50,000	Pneumatic U/L×3
Nihon Silo Dolphin		160	12.0	12.0	50,000	Pneumatic U/L×3
Shintozai Reizo		120	12.0	12.0	30,000	Ship's gear
Japan Tank Terminal		120	12.0	12.0	30,000	6 in.×4
Chuo Futo (A, B, C, D, E)		1,000	10.0	9.8	15,000	
Dezo Futo		390	7.0	7.0	10,000	
Kawatetsu Wharf	(A)	200	9.6	9.6	15,000	10T×1
	(B)	150	10.5	10.5	15,000	20T×3
	(C)	139	10.4	10.4	20,000	22T×1
	(E)	180	10.3	10.3	15,000	Nil
	(F)	270	12.0	12.0	50,000	16T×2
	(G)	167	9.4	9.4	20,000	9T×2
	(H)	167	9.4	9.4	20,000	10T×4
	(I)	167	9.4	9.4	20,000	
	(J)	169	8.9	8.9	10,000	Nil
	(L)	280	12.0	12.0	50,000	15T×2
	(M)	310	12.0	12.0	50,000	16T×2
	(OC)	245	10.5	10.5	20,000	15T×2
	(OD)	130	10.5	10.5	20,000	22T×1
New Berth	(EB)	350	18.0	17.0	200,000	60T×2
Fuji Koun		134	6.0	5.4	4,500	Ship's gear
Showa Denko		289	10.5	10.4	20,000	8T×1
Ichihara Public		240	7.2	7.2	5,000	
Fuji Sogyo		80	9.0	9.0	10,000	Ship's gear
Asahi Glass Pier		195	12.0	11.8	50,000	13.5T×2
Export Pier		172	5.4	4.5	6,000	
Maruzen No. 2 Dolphin		230	12.0	11.8	50,000	10 in.
Sea Buoy (IMODCO)			16.0	15.5	100,000	(LOA 290 m.)
Nissan Nisso Pier		150	10.5	10.0	20,000	(LOA 180 m.) Ship's gear
Kyokuto Oil Dolphin		100	14.0	14.0	100,000	12 in.×3
Mitsui Sekiyu		280	4.7	4.7	2,000	Ship's gear
Idemitsu No. 1 Dolphin		280	16.0	14.5	100,000	30 in. & 18 in.
No. 2 Dolphin		245	16.0	14.8	75,000	24 in. & 8 in.
No. 3 Dolphin		205	10.7	10.7	45,000	6 in.
Sumitomo Chibakagaku		350	10.5	9.6	12,000	Conveyor×2
(Chemical Tanker)		80	7.5	7.0	2,000	
Fuji Oil Dolphin		111	16.0	15.0	100,000	30 in. & 20 in.
Nihon Rinsan		260	10.5	10.2	25,000	375 t.p.h.×1
Keiyo Sea Berth		470	W20.5 E20.0	19.2 19.0	235,000	48 in.×3
Marubeni Sea Berth		405	14.0	13.5	60,000	

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agents to arrange stevedores. Vessel must constantly keep her Agents advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gears not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. (50% additional of basic stevedorage) 2100–0500 hrs. next morning (130% additional) Sundays/holidays (60% additional).

MEDICAL: No advance notice required unless urgent.

TANKERS:

Berth	*Product*	*Shorelines*	*Discharge Rate t.p.h.*
Kyokuto	Naphtha	12 in.×1	1,500
	Crude Oil	12 in.×2	5,000
	Fuel Oil	12 in.×2	2,000
Maruzen No. 2	Fuel Oil	10 in.×1	800
	Crude Oil	10 in.×1	1,500
	Naphtha	6 in.×1	800
Maruzen No. 10	Fuel Oil	12 in.×1	1,300
	Naphtha	12 in.×1	900
Maruzen No. 14	Butadeine (Loading)	10 in.×1	400
Keiyo Sea Berth (W)	Crude Oil	16 in.×3	8,000
Keiyo Sea Berth (E)	Crude Oil	16 in.×3	8,000
Fuji Oil	Crude Oil	12 in.×2	4,000
	Fuel Oil	8 in.×1	1,500
	Propane	12 in.×1	300
	Butane	12 in.×1	300
Idemitsu Oil No. 1	Crude Oil	12 in.×2	5,000
	Minus Oil	12 in.×2	3,000
	Fuel Oil	12 in.×2	3,000
Idemitsu Oil No. 2	Crude Oil	12 in.×2	4,000
	Fuel Oil	12 in.×2	1,500
	Propane	12 in.×1	1,000
	Butane	12 in.×1	1,000
Idemitsu Oil No. 3	Fuel	8 in.×1	800
	Naphtha	6 in.×1	500
	Lub. Oil	6 in.×1	500

FRESH WATER: Available by barge and shore line.

FUEL: Most grades available.

GANGWAY/DECK WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: Carried out by stevedores.

SHIP CERTIFICATES: See "Tokyo".

CUSTOMS ALLOWANCES: Tobacco — 200 cigarettes. Wine and/or spirits — 1 bottle.

CONSULS: None.

REPAIRS: All major repairs possible.

DRY DOCK: Mitsui Ship Building Yard 500,000 d.w.t. and 300,000 d.w.t. dry docks.

REPATRIATION: Possible.

AIRPORT: About 70 km. to Tokyo Airport.

TIME: Japan Standard Time (135° E.) = GMT plus 9. Permanent.

HOLIDAYS: New Year's Day (January 1st); Attaining the Age of Maturity Day (January 15th); State Foundation Day (February 11th); Vernal Equinox Day (March 21st); Birthday of Emperor (April 29th); Constitution (May 3rd); Children's Day (May 5th); Respect Day for the Aged (September 15th); Autumnal Equinox Day (September 24th); Gymnastic Day (October 10th); Civilisation Day (November 3rd); Labour Thanksgiving Day (November 23rd). Cargo work can be arranged at 50 – 100% extra on basic cost.

POLICE/AMBULANCE/FIRE: Police Tel. 110, Fire and Ambulance 119.

TELEPHONE: Facilities for placing telephones on board only at Chuo Pier.

SHORE LEAVE: Local Immigration offices issue shore pass valid for only 3 days, but 3 days extensions possible if ship stays longer.

AUTHORITY: Chiba Port Control Office.

AGENT: Sub-Agent of Dodwell & Co. Tokyo. Chiba Kaiun Sangyo Co. Ltd., 1-20, 3-Chome, Suehiro, Chiba. Cable: Chibamarine, Chiba. Tel. Chiba (0472) 61-3361. Telex: 3722-230.

ETAJIMA: 34.11 N. 132.29 E. (See Plan Book)

OPERATORS: C.I. Oil Terminal.

LOCATION: Name of berth, Ataka Sekija. Position, Lat. 34° 11′ 30″ N., Long. 132° 29′ 00″ E.

DOCUMENTS:
- Certificate of Registry.
- Safety Equipment Certificate.
- Derating Exemption.
- Clearance from Last Port.
- 10 Crew Lists.
- 2 Crew Customs Declaration (Japanese Form).
- 4 Stores Lists.
- 5 Slop Chest Lists.
- 1 Quarantine Declaration.

PILOTAGE: Compulsory. Pilot boards in Bungo Channel 3 miles South Seki Saki Lighthouse. Pilot station (33.13 N. 131.54 E.) equipped with light signal – no VHF. Pilot remains on board during pratique operations – also see "Tankers".

ANCHORAGE: See "Restrictions".

RESTRICTIONS: Controlling depths (MLW) are as follows: entrance 20 m.; channel 17 m.; anchorage 17 m.; berth 15 m.; The mean tidal range is 3 m. Nature of bottom is mud. Velocity of current: entrance 1 knot; channel 1.5 knots; anchorage 0.5 knots; berth 0.5 knots. Vessels may berth at any stage of the tide during the day.

MAX. SIZE: 80,000 d.w.t. Length 260 m. Draft 14 m. – 15.5 m. according to tidal conditions. Beam 40 m.

HEALTH: Available during daytime only in Kure or Iwakuni quarantine anchorage. Quarantine officers inspect galley, pantry and food stores. Pilot ladder used for boarding.

RADIO: Shimonoseki – Kobe.

TUGS: Five available and advised for berthing and unberthing. One forward and one aft, 3,000 h.p.

MEDICAL: Doctor available.

TANKERS: Pilot berths/unberths vessel.

It is dangerous to navigate at night.

Moorings: Forward 3 headlines	Aft 3 sternlines
2 breast lines	2 breast lines
2 spring lines	2 spring lines

Connections: 2 × 12 in. connected and disconnected by shore gang booms not necessary. Max. pressure required by shore is 7 kg/sq.cm.

Pumping rate: 5,000 k/l per hour expected.

Pipeline: Length 131.6 m.; 2 × 24 in.

Gangway: Pilot ladder used as not sufficient room for gangway.

Pollution: Berth is closed by floating pollution retain. Dimension 320 × 56 m.

Ballast: During ballast operations shore personnel remain on board to check for dirty ballast and a motor-boat watches for same purpose. There are no slop tanks or facilities for dirty ballast ashore.

Storage capacity: crude oil, 22,000 k/l × 4 tanks; heavy oil, 22,000 k/l × 2 tanks; refined oil, 22,000 k/l × 2 tanks.

DENSITY: Summer 1020, Winter 1025 average.

FRESH WATER: Available, any quantity, by water barge from Kure, 4 days notice required.

FUEL: Available.

FIRE PRECAUTION: Standard regulations.

REPAIRS: Facilities available – shore steam and electricity available.

DRY DOCKS: Available, lifting capacity 500,000 tons.

STORES: Laundry and provisions available.

CUSTOMS ALLOWANCES: 200 cigarettes, 1 open bottle of spirits and some beer.

Customs officers inspect crew cabins.

FUKUYAMA: 34.29 N. 133.21 E. (See Plan Book)

Located on central Northern coast of Setonaikai (Inland Sea) and on border of Hiroshima Prefecture and Okayama Prefecture.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agents will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agents should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Inland Sea Pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to Pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from one of two Pilot stations dependent upon vessel's last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as harbour Pilots up to berth or anchorage at destination.

Note: No VHF communication available with Inland Sea Pilot stations. Also see "Shipmasters Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits) Position 34.09° N. 135° 07.54′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse. (Vessels transitting Bungo Channel). Position 33° 13′ N. 131° 54′ E. Telegraphic address "Anjin Moji". In event bad weather, recommended vessels proceed shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

APPROACHES: Main approach channel (leading to raw material discharging berths and pipe loading berth). Depth 16 m. (52 ft. 6 in). Width 350 m. (1,148 ft.). Distance from quarantine anchorage to "A" berth, 9,500 m.

Pilot undertakes berthing vessels at "A", "B", "M" or "L" berths, with draft up to 16 m. Vessels drawing over 15.5 m. may berth at high tide.

Branch channel (leading to loading berths except pipe berth). Depth 11 m. (36 ft.). Width 300 m. (984 ft.). Distance from quarantine anchorage to Export berth No. 1: 11,500 m.

ANCHORAGES: Quarantine anchorage position: 34° 22.5′ N. and 133° 26.3′ E., an area of 750 m. radius.

RESTRICTIONS: Inland Sea (Setonaikai):

1. *Akashi Strait and Bisan Seto:* All vessels, over 200 m. LOA shall navigate on Bisan Seto in daytime only and also vessels over 250 m. LOA have to have an escort boat when navigating on Akashi Strait and Bisan Seto respectively in accordance with the Maritime Regulations.

2. *Kurushima Strait:* The vessels, over 200 m. LOA shall navigate on Kurushima Strait at slack water in daylight and vessels over 250 m. LOA have to have an escort boat when navigating on Kurushima Strait.

The draft restrictions are as follows: The permissible draft for LOA from 200 m. up to 250 m. shall be less than 13 m. and LOA from 250 m. up to 300 m. shall be less than 11 m.

Escort boat: 2 escort boats with VHF available. Max. speed 24 knots, cruising speed 18 knots.

MAX. SIZE:

NIPPON KOKAN K.K. – FUKUYAMA WORKS. Private Berths.
RAW MATERIAL BERTHS (Discharging Berths).

Berth	*Length and depth in metres*	*Max. size of vessels acceptable in d.w.t.*	*Cargoes discharged*	*Unloaders*
"L"	315 17.3	200,000	Coal and Ore	2 gantry cranes each with 1,500 t.p.h. discharging capacity. Average discharging rate per hour:
"M"	250 17.0			Iron Ore 1,200 tons with 1 crane. Coal 800 tons with 1 crane.
"A"	300 17	150,000	Coal and Ore	4 gantry cranes (available for both "A" and "B" berths) each with 1,500 t.p.h. discharging capacity. Average discharging rate per hour:
"B"	280 16	100,000		Iron Ore 950 tons with 1 crane. Coal 700 tons with 1 crane. Normally 2 cranes are used for a vessel
"E"	210 14	70,000	Mainly Coal	2 gantry cranes each with 750 t.p.h. discharging capacity. Average discharging rate: Coal 600 t.p.h. with 1 crane.
"F"	180 11	20,000	Mainly Coal for coastal vessels	2 level-luffing cranes each with 300 t.p.h. discharging capacity. Average discharging rate: Coal 500 t.p.h. with 2 cranes.
"S"	180	35,000	Pig Iron and Scrap for discharging and loading	3 level-luffing cranes each with 15 tons lift capacity. Average discharging rate per hour: Pig Iron 350 tons with 3 cranes. Scrap 300 tons with 3 cranes.

LOADING BERTHS:

Berth	*Length and depth in metres*	*Max. size of vessels acceptable in d.w.t.*	*Cargoes loaded*	*Loaders*
No. 1	234 11	20,000	Steel sheets, coils and plates	5 level-luffing cranes each with 30 ton lift capacity. Outreach 18 m.
No. 2	230 13	35,000	,,	Clear height average 18.5 m. from highwater level to crane hook.
No. 3	146 13	35,000	,,	1 gantry crane with 20 ton lift capacity. Outreach 22 m. Clear height 18 m. from highwater level to crane hook.
No. 4	250 13	35,000		2 level-luffing cranes with 40 ton lift capacity.
No. 5	100 13	35,000		1 gantry crane with 30 ton lift capacity.
Pipe	310 11	35,000	Steel Pipe	2 gantry cranes each with 20 ton and 50 ton lift capacity. Outreach 27.7 m. Ship's gear is concurrently used.

Berth No. 1, 2, and 3 are adjoining

Pipe berth is located in Kasaoka, Okayama Pre. (closed port).

HEALTH: Radio pratique available. At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards and Deratting Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers' health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound, to Nagasaki Radio respectively.

VHF: "Fukuyama Port Radio" on Channel 16 (0600–2000 hrs.).

TUGS: 5 tugs (3,200 hp) available in the Fukuyama Harbour. Additional tugs are available from other Inland Sea terminals.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agents, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

DENSITY: Summer 1016–1022. Winter 1025. The density not much affected by tide, which is maximum 3.84 m.

FRESH WATER: Available at any berth. Supply capacity about 30 t.p.h. However, for a vessel moored to a buoy or at anchorage, water barge comes from Mizushima.

FUEL: Bunkers by lighter from Kobe, Mizushima, Tokuyama or Moji area. Advance notice required.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Only minor repairs.

DRY DOCK: None. Available at Innoshima or Mukayima.

REPATRIATION: Possible.

AIRPORT: Okayama airport 70 kms. from Fukuyama which takes about 2 hours by car. 1 flight daily.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Report to Guardmen's office located at West Gate of Nippon Kokan.

TELEPHONES: No arrangements for placing telephone on board. Private telephones connecting with offices in the compound of the Fukuyama Works are placed at each of the raw material berths.

For vessels alongside export berths, private telephone available at foremen's office located on berth.

GENERAL: Fukuyama is a local and new port, developed along with the expansion of Nippon Kokan, Fukuyama Steel Works.

Ship repairs (except small ones) for machinery, radio, radar, etc., are all arranged by firms located in Tokyo, Osaka and Kobe.

SERVICES: Hold cleaning.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AGENTS: Sub-agents of Dodwell & Co. Ltd., Tokyo, Nissan Senpaku Ltd., Port Bldg., 1, Kokan-cho, Fukuyama-shi, Hiroshimaken. Cable address: Nissan Fukuyama. Domestic Telex: 6436–11; 6436–12 Nissan J. Tel.: Fukuyama (0849) 41–0535 and 0536.

FUSHIKI: 36.49 N. 137.03 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
6 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agents will prepare Inward/Outward Declaration, 2 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Pilot available any time during daylight. Not compulsory. No telegraphic address of Pilot station, therefore, direct advice to local Agent always required. Pilot meets vessels 029°, 2 miles off leading light, thence takes vessel to Quarantine Anchorage ground. Due to many fish-nets on both sides of fairway if requiring to come into Quarantine Anchorage without taking Pilot, necessary to advise Agent in advance. In case of bad weather and need to await outside port, recommend cruising in Toyama Bay until sea abates. Bay area too deep to anchor and also danger of fish-nets. When approaching position for Pilot, give exact ETA to Agent by using Niigataradio and/or VHF to Fushiki Harbour Master. Small wooden pilot boat painted yellow. No particular light or sound signals required.

ANCHORAGE: Safe at all seasons with depth from 8 to 11 m. Sand and clay bottom. Room at anchorage for at least 6 vessels over 5,000 gross tons.

RESTRICTIONS: Pilot not available during darkness. No restrictions on tide, because small tide in all seasons. If draft over port limitation, vessel enters port after making adjustment by lightening in Outer Harbour.

MAX. SIZE: Length 180 m., draft 31 ft. in Summer and 30 ft. in Winter. However, depth of port not always definite, being a river port and dredging operations always carried out to keep depth all year round. Tidal range is maximum 0.45 m. Depths at the berths expected to be 10 m. when dredging is completed in 1978.

HEALTH: Radio Agent for free pratique not less than 12 hours and not more than 36 hours before arrival, advising full details of vessel and health conditions on board. When free pratique is granted by radio, vessel will be required to submit the following documents to Quarantine Officer on arrival:

Maritime Declaration of Health.
Crew List.
Passenger List.

The following vessels will not be able to get radio pratique.

A vessel that has been in contact with an infected area or a suspected infected area within 15 days of arrival.

If a vessel has on board any case, or any suspected case, of infectious disease within 15 days of arrival.

If crew or passengers on board do not possess valid Smallpox Vaccination certificates.

If a vessel does not possess a valid Derat or Derat Exemption Certificate.

RADIO: (Also see "Pilotage".) Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Tugs normally join vessel at port entrance, but sometimes in Outer Harbour for large vessels. Narita-Maru (2,060 h.p.) and Nihonkai-Maru (1,800 h.p.) provide lines, free of charge and Raicho-Maru (760 h.p.) uses ship's line. Used only when Pilot on board.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agents mainly by radio.

Berth	*Length (m)*	*Depth*	*Permissible Draft*	*Capacity (g.t.)*	*Shore Cranes & Pipe-lines*
Left No. 1 Wharf	160	(see note below)		10,000	2×5 T
Left No. 2 Wharf	150			10,000	
Left No. 3 Wharf	185			10,000	
Left No. 4 Wharf	185			10,000	
Left No. 5 Wharf	90			1,000	
Right No. 1 Wharf	220			2×3,500	1×5 T
Right No. 2 Wharf	220			2×3,500	
Right No. 3 Wharf	185			15,000	1×8 T
Right No. 4 Wharf	185			10,000	
Right No. 5 Wharf	130			5,000	

Note: Depth becomes shallow with every rainfall. Therefore, recommended to contact the port authorities prior to vessel's call. See "Max. Size".

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agents, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

DENSITY: Average density between 1015 and 1019 in all seasons.

FRESH WATER: Available, from left wharf No. 1, 2 and 3, average 45 t.p.h. In other berths, to be supplied by barge, average 50 t.p.h.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. Bunkers will be lightered from the nearest bunker port at maximum 7 days prior notice.

DEVELOPMENTS: Right No. 4 wharf reconstructed, now 175 m. long, 10 m. deep, also Right No. 5 wharf, 130 m. long, 7 m. deep. Left No. 1 pier under reconstruction, when completed will be 185 m. length, 10 m. depth. Left No. 2 pier to be reconstructed and completed to same size as Left No. 1.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Minor repairs only.

DRY DOCKS: No dry docks. Nearest available in Toyama.

REPATRIATION: Possible.

AIRPORT: Toyama Airport about 35 km distance. 2 regular services a day. ANA only.

TIME: GMT plus 9. No alterations made to clocks during year.

HOLIDAYS: 1st May and New Year's Day.

POLICE/AMBULANCE/FIRE: Police, Fushiki Police Station, Takaoka (0766) 44–1500; Ambulance, Fushiki Fire Station, Takaoka (0766) 44–1122, or 119; Fire, Fushiki Fire Station, Takaoka (0766) 44–1122.

TELEPHONES: No facilities for placing telephones on board.

SERVICES: Hold cleaning available.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port and Harbour Dept.

AGENTS: Sub-agents of Dodwell & Co. Ltd., Toyko. Fushiki Kairiku Unso Co. Ltd., 6–6, Fushiki-Minato-machi, Takaoka-shi, Toyama-Ken. Tel. Takaoka. (0766) 44–1300. Telegraphic address "Fushikikairiku Fushiki". Telex: 5155–571/572.

HACHINOHE (Hachinoe): 40.32 N. 141.33 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits,

camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agents should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory, but arrangeable at Master's request. Pilot always arranged by Agent if Master requires, and vessel required radio Agent ETA 24 hours before arrival. Pilot boat has no facility to communicate with ship,, but flies pilot flag "H". Pilot boards at Quarantine Anchorage (Lat. 40° 32′ N. Long. 141° 32′ E.).

ANCHORAGE: Open sea anchorage. Depth of water: 10–15 m.

RESTRICTIONS: Pilot arrangeable only in daytime for entry (0630 – sunset) and 0630 hrs. to 2200 hrs. for sailing.

MAX. SIZE: Draft: 13.00 m. LOA: 296 m. Breadth: no restriction.

HEALTH: Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards and Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days., Captain must advise crew and passengers' health condition to respective Quarantine Office through ship's Agents prior to arrival and close all soil pipes before entering port.

Formalities will be carried out at the point 1,500 m. 335° from the light of North breakwater.

Radio pratique possible.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi and Northbound to Nagasaki Radio respectively.

TUG: Tug joins vessel inside breakwater.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Public:		
Wharf	*Depth*	*Berths*
(Cargo)		
Shirogane	10.0 m.	2
Shirogane	7.5 m.	1
Hachitaro	13.0 m.	2
	10.0 m.	2
	7.5 m.	2
(Tanker)		
Kawaragi	6.5 m.	2
Private:		
(Cargo)		
Mitsubishi	10.0 m.	1
Hachinohe	10.0 m.	1
Nitto Chemical	6.5 m.	1
(Tanker)		
Shell, Mobil, Idemitsu, Daikyo	6.5 m.	1

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

DENSITY: 1025.

FRESH WATER: Available from wharf and barge. 20 t.p.h. from barge (capacity: 60 tons). 30 t.p.h. from wharf. Overtime service: plus 30% for 1700–2200 hrs. and Sunday/holiday. Plus 50% for 2200–0500 hrs.

FUEL: Domestic oil except Bunker "C" is available, bonded oil will be brought from Tokyo, Yokohama or Hakodate with sufficient advance notice, when required.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Minor repairs such as welding, piping and lathing.

REPATRIATION: Possible.

AIRPORT: Nearest airport at Misawa.

TIME: GMT plus 9. No alterations made to clocks during year.

HOLIDAYS: 1st May, 21st August.

POLICE/AMBULANCE/FIRE: Police 43-4141 (Headquarters); 33–0237 (Water Police Station); Ambulance 119; Fire 119.

TELEPHONE: No facilities for placing telephones on board.

GENERAL: 1. Discharging ex-gearless vessel not available at anchorage because of no facilities. 2. In case vessel is moored to buoy, vessel required to prepare anchor chain (port or starboard anchor chain) prior to ship's arrival.

SERVICE: Surveyor: Tally. Hold cleaning. Radar service by Nippon Radar Service Co. Notary public.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

SHIPMASTER'S REPORT: 1975.

Pilotage: Compulsory. The Quarantine Anchorage is position 40° 32.9′ N. 131° 32.7′ E., bounded by a circle radius 2.5 cables. In view of the considerable new development vessels should obtain Japanese chart No. 65 if possible. Vessels navigating on B.A. charts can be met by pilot at a position 2 miles north of Same Kaku lighthouse, by prior arrangement.

Restrictions: Vessels may sail any time.

Max. Size: Draft 9.5 m. LOA 170 m. breadth no restriction (June 1975).

Health: Radio pratique can be obtained by all vessels holding valid Japanese Sanitary Inspection Certificate. (This rule applies to all Japanese Ports).

Tugs: A number of tugs are available.

Berthing: A number of new berths are now available. Dredging is in progress and available drafts can be expected to increase.

Airport: Two flights per day.

Developments: Reclamation, expansion, dredging etc., in progress.

AUTHORITY: Port Administration Office.

AGENTS: See "Aomori".

HAKATA: 33.36 N. 130.24 E. (See Plan Book)

DOCUMENTS:

Customs: When vessel arrives direct from foreign port, Customs officials will board vessel for search. The following documents are to be submitted.

Crew list, Passenger list, Store list, Manifest of crew personal effects (must be signed by individual crew member), Arms and ammunition list, Narcotics list, List of ports of call on current voyage, Discharging cargo manifest, Through cargo manifest, Declaration inward/outward (Form No. C2000).

The following will be checked on board:

Ship's registry, Last port clearance.

When vessel comes from Japanese port, Customs officials will not attend on board, except special case. The Master or Agents are to attend at Custom House for entry formalities with the following documents:

Discharging cargo manifest, Through cargo manifest, Declaration inward/outward, Ship's registry, Last port clearance, Documents entrusted with the Master by at previous port.

On vessel's departure, a clearance is issued by Customs, after confirming payment of tonnage dues.

Immigration: Immigration officials board vessel on her arrival in port to examine passports, discharge books and/or other equivalent travel documents and provide a 72-hour landing pass for crew members and passengers. One copy each of crew list and passenger list are required by them. Providing vessel's Agents with a Crew List beforehand will be a great help in expediting immigration business on vessel's arrival. When vessel stays in port more than 72 hours, the landing passes will be extended every 72 hours on application.

In the event that crew members, without entry visas, are to be landed for repatriation or transfer, Immigration will not permit their landing unless passage, by either sea or air, ensuring the prompt departure from Japan (within 72 hours) of these men have been booked, or unless the vessels to which they are to be transferred, arrive in Japan within 5 days.

PILOTAGE: Not compulsory, but necessary unless Master well acquainted with locality. Pilot embarks at quarantine anchorage; position 33° 38′ N. 130° 19′ 30″ E. Request for Pilot made through ship's Agent, Master reporting ship's ETA by radio giving accurate time of arrival at least 24 hours prior arrival, also any subsequent change. No VHF. In the event of rough sea, harbour tug-boat will be used.

ANCHORAGE: No anchorage in port.

RESTRICTIONS: No restrictions if vessel in free pratique and draft less than 10 m. No tide.

MAX. SIZE: No restrictions of length, breadth. Draft 11.10 m.

HEALTH: (a) Quarantine station: Sea area surrounded by the following lines.

1. The line connecting between the top of the Nokono-Shima and point "A" which is located on the sea in the direction of 90° and at the distance of 2,540 m. from the top of the Nokono-Shima. (The parallel of 33° 38′ 00″ N.)
2. The line connecting between point "A" and point "B" which is located on the sea in the direction of 0° and at the distance of 1,750 m. from point "A". (The Longitudinal line of 130° 20′ 00″ E.).
3. The line drawn towards the Nokono-Shima in the direction of 270° from point "B". (The parallel of 33° 37′ 06″ N.).
4. The coast line of the Nokono-Shima.

The centre of the quarantine anchorage: 33° 37′ 30″ N., 130° 19′ 30″ E.

(b) Quarantine service is rendered from sunrise to 1 hour before sunset.

(c) 'Q' flag should be hoisted until free pratique is granted.

(d) Vessels exceeding 20,000 gross tonnage can undergo quarantine on application when they berth alongside wharf.

(e) When vessel arrives from plague infected or suspected area within 10 days after she left such place, a 24-hour special quarantine is required. All sanitary scuppers must be closed and garbage not thrown overboard after vessel reaches 60 miles off inland sea areas.

(f) Radio pratique is applicable.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi and Northbound to Nagasaki Radio respectively.

TUGS: 2 tugs, 1,000 and 800 h.p. Normally join vessel when approaching wharf. Ship's lines used. If vessel over 15,000 g.r.t. an additional tug of 1,500-3,200 h.p. should be ordered from Moji or Wakamatsu.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Wharf	*Length (m.)*	*Depth (m.)*	*Capacity (g.t.)*
Central Pier			
Quay No. 5 and 6	362	10.0	15,000 × 2
Quay No. 4	150	9.0	10,000 × 1
Quay No. 3	250	7.8	10,000 × 1
Quay No. 2	250	7.8	6,000 × 2
Quay Nos. 9, 10 and 11	400	7.5	5,000 × 3
Suzaki Pier			
Quay Nos. 3 and 4	555	11.0	20,000 × 2
Quay No. 2	185	11.0	15,000 × 1
Quay No. 1	172	7.5	5,000 × 1
Quay 7-10	467	5.5	2,000 × 5
Quay Nos. 5 and 6	260	7.5	5,000 × 2
Hakozaki Pier			
Quay No. 5	240	12.0	30,000 × 1
Quay No. 4	185	10.0	15,000 × 1
Quay Nos. 1, 2 and 3	390	7.5	5,000 × 3
Quay Nos. 6, 7, 8 and 9	520	7.5	5,000 × 4

CARGO HANDLING FACILITIES:

Lighters: 2, Owners Mitsubishi Warehouse Co., tonnage 490

Automatic grain discharge facilities: Type: Pneumatic conveyor.

No.	*Capacity*	*Location*	*Owners*
1	150 t.p.h.	Central pier	Tofuku Flour Mills
1	100 t.p.h.	,, ,,	Municipal Office
2	210 t.p.h. ea.	Suzaki pier	Hakata-Ko Silo Co.
2	400 t.p.h. ea.	,, ,,	Municipal Office
1	100 t.p.h. ea.	,, ,,	Nisshin Flour Mills

Shore cranes:

No.	*Capacity*	*Location*	*Owners*
4	10 tons	Central pier (movable)	Ryugumi Sankyu Unyu Hakata Unyu Hakko Unyu
2	8 tons	Central pier (movable)	Nippon Express Hakata Koun
3	7 tons	Central pier (movable)	Ryugumi Hokushin Unyu Sogo Unyu
1	5 tons	Suzaki pier (movable)	Fukuoka Soko
1	5 tons	Suzaki pier (movable)	Fukuoka Soko
1	4 tons	Suzaki pier (movable)	Mitsubishi Soko

Average performance of loading/unloading:

Discharging:	Grain in Bulk	100/150 t.p.h.	by p. conveyor
		50 t.p.h.	by winch
	Crude rubber	30 t.p.h.	
	Sugar in bulk	50 t.p.h.	
	Lumber	30/35 t.p.h.	
	Frozen Horse Meat	20/25 t.p.h.	
Loading:	Fertilizers in bulk	60 t.p.h.	
	Tyres & tubes	60/65 Ms/tons	

Grain silos:

No.	*Capacity tons*	*Location*	*Owners*
46	15,000	Suzaki pier	Hakata-Ko Silo Co.
30	7,500	Suzaki pier	Nisshin Flour Mills
2	3,800	Central pier	Tofuku Flour Mills
1	40,000	Suzaki pier	Hakata-Ko Silo Co.
1	20,000	Suzaki pier	Hakata-Ko Silo Co.
1	17,000	Suzaki pier	Kamigumi Silo
1	40,000	Suzaki pier	Genkai Silo

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Normal working hours: 0800 to 1700 hrs.

Overtime work is possible by applying to customs at the following fees:

0000–0500 hrs.	350 Yen per hour
0500–0830 hrs. 1700–2200 hrs. and Sundays and Holidays	300 Yen per hour
2200–2400 hrs.	350 Yen per hour

No work can be arranged for on 31st December to 3rd January.

MEDICAL: No advance notice required unless urgent.

DENSITY: About 1024.

FRESH WATER: No water barge available. Hydrants: at Central, Hakozaki and Suzaki Pier. Rate of delivery: 10/20 t.p.h.

FUEL: Bonded bunker oil is not available at this port, but is to be lightered from other port. An adequate notice should be given to the suppliers in order to avoid delay in replenishment. The rate of delivery from oil barge is 80/100 t.p.h.

Suppliers	*Installation*	*Required notice*
Shell Sekiyu K.K.	Shimonoseki	2 days
Esso Oil co.	Shimonoseki	2 ,,
	Sakai	5 ,,
Mobil Oil Co.	Kokura/Moji	2 ,,
	Oita	3 ,,
Caltex Oil Co.	Shimonoseki	2 ,,
	Kudamatsu	3 ,,
Mitsubishi Shoji	Shimonoseki	2 ,,
	Iwakuni	3 ,,
	Kanokawa	3 ,,
C. Itoh & Co., Ltd.	Matsuyama	4 ,,
	Mizushima	4 ,,
Nissho Co.	Shimonoseki	2 ,,
	Matsuyama	4 ,,
Mitsui & Co., Ltd.	Oita	3 ,,
Nippon Mining Co.	Mizushima	4 ,,
Kanematsu Gosho	Kokura	2 ,,
	Tokuyama	3 ,,
Idemitsu & Co.,		
Marubeni Iida Co.		
Sumitomo Shoji	Tokuyama	3 ,,

FIRE PRECAUTIONS: Modern chemical fire service boat "Hiryu Maru" (30 tons).

CONSULS:

Hon. British Consulate, Kitakyushu Tel. 093-331-1311
American Consulate General, Fukuoka Tel. 092-751-9331
Republic of China Consular Agency, Fukuoka Tel. 092-761-3458
Republic of Korea Consulate General, Fukuoka Tel. 092-771-0461

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore but no spirits.

REPAIRS: Local workshop (fishing-boat repairs) available only for small repairs, so Agent for ocean-going vessel in Hakata arranges repairs from Moji or Tobata.

REPATRIATION: Possible.

AIRPORT: Fukuoka airport: Distance: about 20 minutes from Hakata port by car. JAL Domestic regular airline for Tokyo and Osaka. ANA Domestic regular airline for Tokyo, Osaka. Also, CATHAY and JAL airlines for Taipei, Hong Kong 4 times a week. Korean and JAL airlines for Seoul and Pusan daily except Sunday.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police/Ambulance tel. 110; Fire 119.

TELEPHONES: May be placed on board if 7 days notice given.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port Harbour Bureau.

AGENT: Sub-agents of Dodwell & Co. Ltd., Tokyo. Holme Ringer & Co. Ltd., Fukuoka Branch, c/o Mitsubishi Warehouse Co. Ltd., 2-30, Okihama-cho, Fukuoka. Telegraphic address "Ringer Fukuoka". Tel. 092-271 1292. Telex: 722-684 stating "For Ringer Fukuoka".

HAKODATE: 41.47 N. 140.42 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Stores List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's agents will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory, but in practice is necessary. Pilots available 24 hours a day and vessels able enter and leave port day and night. Pilots board about 1.5 miles S.W. of Breakwater Lt. Ho. Pilot-boat is small boat carrying flag "H".

The limit of Hakodate piloting district is the sea area surrounded by a line drawn from Obana Misaki to Kattoshi Misaki and the coastline.

ANCHORAGES: Quarantine anchorage outside Breakwater and care should be taken not to foul fishing nets. Good anchorage inside breakwater at East side of section 3 – depth 11 to 13 m.

RESTRICTIONS: Quarantine and Customs business between 08.00 and 17.00 hours only.

MAX. SIZE: Tankers up to 75,000 d.w.t. at S.B.M. Max. draft 13 m. Max. L.O.A. 250 m.

Also see "Berthing".

HEALTH: Radio Agent for free pratique not less than 12 hours and not more than 36 hours before arrival, advising full details of vessel and health conditions on board. When free pratique is granted by radio, vessel will be required to submit the following documents to Quarantine Officer on arrival:

Maritime Declaration of Health.
Crew List.
Passenger List.

The following vessels will not be able to get radio pratique:

A vessel that has been in contact with an infected area or a suspected infected area within 15 days of arrival.

If a vessel has on board any case, or any suspected case of infectious disease, within 15 days of arrival.

If a crew or passengers on board do not possess Valid Smallpox Vaccination Certificates.

If a vessel does not possess a valid Derat or Derat Exemption Certificate.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which covers all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: 1×500 h.p., 1×800 h.p., 1×1,100 h.p., 1×2,000 h.p. and 1×2,400 h.p. Tug line generally used.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agents mainly by radio.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Capacity (g.t.)*
North Wharf (North Side)	130	7.0	6.5	3,500
Central Wharf				
(North Side No. 1)	171	9.0	8.5	8,000
(North Side No. 2)	165	9.0	8.5	8,000
(South Side)	133	8.0	7.0	6,000
Bandai Wharf (Front Side)	185	9.0	8.5	8,000
(South Side)	130	7.5	7.0	6,000
No. 1 Buoy		9.0	8.0	8,000
No. 2 Buoy		10.0	9.5	10,000
No. 3 Buoy		10.0	9.5	10,000

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agents to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. (50% additional of basic stevedorage) 2100–0500 hrs. next morning (130% additional) Sundays/holidays (60% additional).

MEDICAL: No advance notice required unless urgent.

TANKERS: *Single-Buoy Mooring:* Asia Oil Company, sea berth suitable for up to 75,000 d.w.t. at Imodco Buoy.

Position: 41° 48′ 08″ N. 140° 40′ 57″ E.

Soundings: At site 15.5 m. In approaches to site, more than 15.5 m. The approach to terminal is free from obstructions.

There is one 20-in. crude line running 2,000 m. from shore to the buoy, and about 500 m. from shore line to the storage tanks.

Mooring: There is no night mooring. Unmooring is carried out from 0600 till 2400 hrs., and may be done by the Master of the ship without a Pilot.

A mooring/unmooring gang is provided for by Agent. Two launches and one tug are in attendance at the mooring. One launch will keep the hose clear while the other handles the lines. The tug is standing by and only pushes against bow or near the stern to keep the head of the vessel in position whilst mooring.

At least six good mooring lines are required, preferably each line to its own bollard. The lines are run single to the buoy. The position of the ship's bow from the buoy is about 40 m., when the distance from the buoy to ship's manifold is about 360 ft.

When mooring, it is requested that the propeller is completely stopped or otherwise turned astern.

Both bow anchors are to be hove well up in the hawse pipe and properly secured before reaching the buoy. Anchors are never to be used while on the buoy. They may foul the buoy's mooring cables and pipe-line on the bottom if released.

Floating Hose: There is one set of 12-in. floating hose for the discharge of crude only. The floating hose is about 600 ft. long from the buoy's manifold. The last two lengths are floating in doughnut-shaped plastic floats. The end is marked with an unlit marker buoy.

The hose connections are always made to the port manifold and are lifted with ship's gear. The hose when full of cargo and equipment weighs over one and a half tons. Information is required of the distance from ship's bow to ship's manifold, and the distance from ship's side to ship's manifold prior to arrival.

Standard flanges are used on the hose. OD 19 in. diameter of bolt-circle 17 in. with 12 bolt-holes size 0.875 in.

Discharging: The discharging should be arranged in such a way as to be able to take sufficient ballast into ship's tanks, when about half way during discharge; to be able to get the ship's head down to prevent the vessel from veering too widely, and run over the hose near the buoy, in case of unfavourable conditions.

Maximum allowed backpressure by shore is about 10 kg/sq.cm. During the discharge the main engine must not be immobilised as it may be used to keep the vessel clear of the buoy.

Stand-by Men: While on the buoy, the vessel will be required to provide sleeping quarters for four men, this includes the foreman who will remain on board throughout the entire operation. It is requested that the discharge officer be provided with meals. The other men are supplied with food from shore.

Discharge Rate: 1,800 k/l per hour.

DENSITY: Average 1025.

FRESH WATER: Available at piers ex-hydrants and by barge at anchorage. Supplier, Hakodate Municipal Office.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.

Fuel supplies for Hakodate are generally lightered from Tokyo Bay area and delays can be caused by weather conditions.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommended request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's register to show Custom Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gears maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Hakodate Dockyard Co., undertakes hull and engine repairs.

DRY DOCKS: No. 1. Capacity 15,000 g.t., length 180 m., breadth 22.45 m. depth 6 m. No. 2. Capacity 9,000 g.t., length 140 m., breadth 8 m., depth 6 m.

AIRPORT: Distant 20 min. by car.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police 110; Ambulance 119; fire 119.

TELEPHONES: Arrangeable on board.

SHORE LEAVE: Local Immigration officers issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port Administration Office.

AGENT: Sub-Agents of Dodwell & Co., Tokyo. Narasaki Sangyo Co., Ltd. c/o Kyoei Unyu Co., Ltd., No. 5–22, Kaigan-cho, Hakodate, Hokkaido. Cable address: "Funekyoei Hakodate". Domestic Telex: 9925–64. Tel. Hakodate (0138) 42–4121.

HIMEJI: (including Hirohata, Shikama, Mega and Aboshi): 34.47 N. 134.41 E. **(See Plan Book)**

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agents will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: See "Kobe". Vessels take Inland sea Pilot off Wada, Hesaki or Sekisaki; or from ports of Inland sea. No exact Pilot station and no checking point at port of Himeji (Mega, Shikama, Hirohata and Aboshi) but Agents arrange Pilot when vessel approaches upon receiving cable giving 24 hours advance notice. Pilot boarding positions as follows: Mega 34° 44′ N. 134° 42′ 15″ E. Shikama 34° 45′ N. 134° 39′ E. Hirohata 34° 44′ N. 134° 37′ E. Aboshi 34° 44′ N. 134° 34′ 10″ E.

No strict location of anchorage for vessel awaiting a Pilot in Himeji area, but should be as close as possible to port according to draft and communication.

ANCHORAGE: No strict boundary areas for anchorages. Anchor as close as possible to the port according to draft.

RESTRICTIONS: At ports of Mega, Shikama and Aboshi, no Pilot boarding between sunset to sunrise. Hirohata Pilot will board from sunrise to 22.00 hours for vessels less than 10,000 d.w.t. for entry, and less than 15,000 for departure, for piers No. 4, 5, 6, 7, 9 and 10 but other berths only from sunrise to sunset.

MAX. SIZE: Draft restrictions as follows:

Mega 11.80 m., Shikama 8.80 m., Hirohata 13.0 m. for central pier, 7.50 m. for Kamota pier (Pier No. 1–7), 9.45 m. for Tsuruta pier (Pier No. 10–14). 15 m. for No. 18 Pier. Aboshi 9.0 m.

Sea buoy mooring, max. draft 19 m. Max d.w.t. 250,000 tons.

HEALTH: No quarantine office at Himeji. At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards. Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically West bound vessel to Choshi and North bound to Nagasaki Radio respectively.

TUGS: Tug(s) normally join vesel when approaching, or at anchorage. Always use tug's lines without charges.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Wharf length*	*Max. LOA*	*Max. Draft*
Shikama			
Public pier No. 2	130 m.		7.50 m.
Public pier No. 3	170 m.		8.80 m.
Public pier No. 4	170 m.		8.80 m.
Public pier No. 5	170 m.		8.80 m.
Public Wharf No. 6	170 m.		9.50 m.
Satetsu pier	200 m.	160 m.	9.00 m.
Buoy No. 2	220 m.	160 m.	9.00 m.
Mega			
Idemitsu Oil Jetty			12.00 m.
Aboshi			
Aboshi Pier	185 m.	150 m.	9.00 m.
Buoy No. 1		175 m.	9.00 m.
Buoy No. 2		180 m.	9.00 m.
Hirohata			
Yumesaki Wharf (Pier No. 1–2)	280 m.		7.50 m.
Kamoda Wharf (Pier No. 3–7)	722 m.		7.50 m.
Central Wharf (Pier No. 9)	315 m.	265 m.	13.00 m.
Tsuruta Wharf (Pier No. 10–12)	503 m.		9.45 m.
Shioiri Wharf (Pier No. 13–14)	320 m.		9.45 m.
Pier No. 18	300 m.	320 m.	15.00 m.
Oil Berth	140 m.		7.50 m.
Buos			9.50 m.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1630 – 2130 hrs. 60% additional of basic stevedorage; 2130 – 0830 hrs. next morning 130% additional; Sundays/holidays 100% additional.

MEDICAL: No advance notice required unless urgent.

TANKERS: Idemitsu Kosan Kaisha Ltd., Himeji oil jetty where 1 berth only and max. 11.8 m. draft allowed. Shore discharging facilities two 12 in. diameter hose connections which connect to 18 in. diameter line for tank hoses. Acceptable max. 5 kg/sq.cm. on hose gauge, discharge rate abt. 2,000 l/t per hour. Discharge rate at the Sea Berth is 10,000 t.p.h. through 2×19 in. lines.

Note: Idemitsu Kosan Kaisha Ltd., Himeji, require following information prior to arrival for smooth berthing and connecting hoses: Height from sea to deck; Length from vessel's side to underneath of hose connections; Height from deck to connection of line; Diameter of connection.

DENSITY: Average density between 1025 and 1026 in Winter season and 1018 and 1020 in Summer season.

FRESH WATER: Idemitsu Oil Jetty, Shikama public pier and Hirohata pier able to supply fresh water from shore, but *No Water Barge available at Port of Himeji* therefore not able to supply fresh water at Satetsu pier (Shikama), Shikama buoy, Aboshi buoy or outside anchorage.

Port	*Average rate of delivery*
Mega	20–30 m/t per hour
Shikama	15–20 m/t per hour
Hirohata	15–20 m/t per hour

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passenger or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CARGO GEAR: See "Certificates" but no special requirements.

CONSULS: No consuls at Himeji, Shikama or Hirohata.

REPAIRS: Most minor deck and engine repairs available at port of Himeji; in case special technician required, should be called from Kobe.

DRY DOCKS: No dry dock available at port of Hijemi, Nearest dry dock Ishikawajima-Harima Heavy Industries Co. Ltd., Aioi, who have following dry docks. Also see Aioi.

	LOA	*LBP*	*Breadth*	*Depth*	*Capacity*
Dock No. 1	238 m. (780′9″)	230 m. (754′7″)	33 m. (108′3″)	5.5 m. (18′)	73,000 d.w.t. (LT)
Dock No. 2	156.1 m. (512′1″)	145 m. (475′8″)	19.5 m. (63′11″)	4.5 m. (14′9″)	14,000 d.w.t. (LT)
Dock No. 3	341 m. (1,118′9″)	328 m. (1,076′1″)	54 m. (177′1″)	6 m. (19′8″)	300,000 d.w.t. (LT)

REPATRIATION: Possible.

AIRPORT: About 60 km. to Irami Airport. Regular services.

TIME: GMT plus 9. No alterations made to clocks during year.

HOLIDAYS: At Aboshi, no work on 1st and 3rd Sunday. At Shikama, shore crane, no work on 1st and 3rd Sunday but gangs available for discharging and loading.

POLICE/AMBULANCE/FIRE: Police (Shikama) Tel. 35–1441; Ambulance (Shikama) 119 or 35-0119; Fire (Shikama) 119 or 35-0119.

TELEPHONE: No facilities for placing telephones on board.

GENERAL: No quarantine available at port of Himeji, therefore pratique to be obtained at other ports.

SERVICES: Tally, laundry, daily provisions by ship chandler available locally. All other service from Kobe or Osaka.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for 9 days, but 3 days extension possible if ship stays longer.

AUTHORITY: See "Amagasaki".

AGENTS: Sub-agents of Dodwell & Co., Tokyo. Shikama Kalun K.K., Minatomachi, Shikama-Ku, Himeji-shi. Tel. Himeji (0792) 35-0912. Telegraphic address "Shikamakaiun Himeji".

HIROSHIMA: 34.20 N. 132.25 E.

DOCUMENTS: See "Yokohama".

PILOTAGE: Inland Sea pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to Pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from one of three Pilot stations dependent upon vessel's last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations. Also see "Shipmaster's Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits). Position 34° 38′ N. 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse (vessels transitting Bungo channel). Position 33° 13′ N. 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimoneseki) Straits. Position 33° 56′ 24″ N. 131° 03′ 12″ E.

ANCHORAGES:

Anch-orage	*Location*	*From Ujina lighthouse Radius*	*m.*	*Conditions*	*Note*
"A"	N. 34° 20′ 59.5″ E. 132° 29′ 17″	56°	2,510 180	Draft – below 6 m. Length – below 120 m. Necessary P & S Anchor	
"B"	N. 34° 20′ 57″ E. 132° 29′ 02.5″	52°	2,200 180	Draft – below 7 m. Length – below 120 m. Same as "A"	
"C"	N. 34° 20′ 45″ E. 132° 29′ 24″	67°	2,467 180	Draft – below 8 m. Length – below 150 m. Same as "A"	
"D"	N. 34° 20′ 35.5″ E. 132° 28′ 28″	53°	1,070 180	Draft – below 10 m. Length – below 150 m. Same as "A"	Load & unload. Logs.
"E"	N. 34° 20′ 22.5″ E. 132° 28′ 29″	73°	910 200	Draft – below 12 m. Length – below 150 m. Same as "A"	Load & unload. Logs.
"F"	N. 34° 20′ 09″ E. 132° 28′ 29″	100°	890 200	Draft – below 12 m. Length – below 150 m. Same as "A"	Load & unload. Logs.
"G"	N. 34° 19′ 57″ E. 132° 28′ 36″	116.5°	1,190 200	Draft – below 12 m. Length – below 150 m. Same as "A"	Load & unload. Logs.
"H"	N. 34° 19′ 45″ E. 132° 28′ 44″	125.5°	1,150 200	Draft – below 12 m. Length – below 150 m. Same as "A"	Load & unload. Logs.
"I"	N. 34° 19′ 47″ E. 132° 28′ 08″	158°	900 300		
"J"	N. 34° 19′ 28″ E. 132° 28′ 18″	162°	1,500 300		
"K"	N. 34° 19′ 17″ E. 132° 29′ 43″	122°	3,280 700		Ship repairs.
"L"	N. 34° 18′ 58″ E. 132° 29′ 34″	132°	3,430 300		Ship repairs.
"M"	N. 34° 20′ 14″ E. 132° 25′ 35″	230°	3,550 300		Ship repairs.
"N"	N. 34° 19′ 56″ E. 132° 25′ 26″	262°	3,820 300		Ship repairs

Ujina Lighthouse is at South of Ujina-islet 34° 20′ 14″ N., 132° 27′ 55″ E.

RESTRICTIONS: Depth of approach to berth about 10 m. Pilots not available after sunset.

MAX. SIZE: Wharf (Hiroshima Prefecture Public Berth) No. 1 length 166 m., draft 9.7 m. (10,000 g/t vessel). No. 2, length 166 m.

Gaibo-Ganpeki (wharf for ocean-going vessel) length 337 m., depth alongside about 10 m., max. draft acceptable 9.70 m.

HEALTH: Usually vessels anchor at the quarantine anchorage, where the authorities board and grant free pratique.

TUGS: Join vessel at quarantine anchorages. Tug's lines used.

BERTHING:

Berth		*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Capacity*
10,000 Tons Wharf (Gaibo Wharf)	No. 1	170	9.2	10.0	No limit. Subject to Draft and Length
	No. 2	170	9.2	10.0	
	No. 3	170	9.7	10.0	
	No. 4	170	9.7	10.0	

STEVEDORES: Working hours: 0830 – 2100 hrs.
TIDES: Max. (spring tide) 3.9 m. Min. (neaps) 0.57 m.

Rate of current at flood tide generally 0.25 knot to N.E.; 0.5 knot at ebb tide to S.W. South area of Togeshima and Kannonsaki 0.25 knot at flood to S.S.E., and 0.5 knot at ebb tide to N.N.W.

FRESH WATER: By water barge (capacity: 330 m/t available). Additional charges made for overtime i.e. after 5 p.m., and Sunday, holidays and Saturday afternoon.

FUEL: Most grades of domestic and bonded oil available, delivered by barge.

CONSULS: No consul in Hiroshima. Nearest Osaka or Kobe. Marine note of protest can be attested by local notary public.

REPAIRS: All types of deck, electrical and engine repairs.

DRY DOCKS: Largest dry dock Taibi dry dock, Mitsubishi-Hiroshima Works, length 154 m., breadth 22.00 m., 10,300 g.t. Kanawa dry dock and Ujina dry dock available for 3,500 g.t. and 1,500 g.t. respectively.

AIRPORT: Hiroshima airport. Only domestic airlines every hour to Osaka and Tokyo.

POLICE/AMBULANCE/FIRE: Police (for emergency) 110; Ambulance 119; Fire 119.

TELEPHONE: No arrangements for placing telephones on board.

SERVICES: Any navigational apparatus can be serviced on request, Cargo holds cleaning services can also be carried out, but tank-cleaning and other services are to be arranged from Kobe.

REGULATIONS: Many seaweed and oyster beds near anchorages, therefore oil pollution precautions strictly observed.

AUTHORITY: Hiroshima-Kencho.

AGENTS: Sub-agents of Dodwell & Co. Ltd., Tokyo. Naigai Unyu Co. Ltd., 23–36, 2-chome, Kaigan-dori, Ujina Hiroshima-shi, Hiroshima-ken. Cable address: Naigai Hiroshima. Domestic Telex: 652–963 Naigai Hir. Tel.: Hiroshima (0822) 54–2421.

HITACHI: 36.30 N. 140.37 E.

DOCUMENTS: and all general information, refer to "Onahama".

PILOTAGE: Not compulsory. Pilot boards in approximate position 36° 28′ 39″ N. 140° 38′ 40″ E. (Quarantine Station). Pilot not available after sunset.

MAX. SIZE: Draft, 8.50 m. limited by channel depth.

PRATIQUE: Radio Pratique not available. Formalities carried out at Quarantine Station. (See "Pilotage").

TUGS: 1 tug of 180 h.p. and 1 tug of 700 h.p. available. A 2,000 h.p. tug will be brought from Kashima if required.

BERTHING:

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Capacity (g.r.t.)*	*Shore Cranes and Pipe-lines*
A	192	4.0	3.5	500	Nil
B	121	7.5	7.0	3,000	Nil
C	130	7.5	7.0	3,000	Nil
D	185	10.0	9.5	15,000	Unloader 2×150 t.p.h.
E	121	7.5	7.0	3,000	1×250 tons
F	97	4.0	3.5	400	Nil
G	50	5.0	4.5	500	Nil
H	50	5.0	4.5	500	Nil
I	130	7.5	7.0	3,000	Nil
J	165	9.0	8.5	10,000	Nil

STEVEDORES: Working hours: 0800 – 1630 hrs.

FRESH WATER: Available.

FUEL: Domestic oil is available; bonded oil will be brought from Yokohama, when required.

REPAIRS: Minor repairs can be undertaken.

AUTHORITY: Port Administration Office.

AGENT: Sub-Agent of Dodwell & Co., Tokyo. Hitachi Huto Co., Ltd. 3-10, 1-chome Kujimachi Hitachi-shi, Ibaragi-ken. Cable Address: Hitachi Futo, Hitachi Kujihama. Domestic Telex: 3645-543. Tel.: (0294) 53-4111. Postal No.: 319-12.

HOSOSHIMA: 32.25 N. 131.41 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Telegraphic address of pilot station "Pilot Hososhima". 48 and 24 hours advance notice of ETA required, and any change in ETA. Pilot boards at Hososhima Quarantine anchorage location, Hosohima lighthouse N.E. one mile off, position 32° 25′ 50″ N. 131′ 41′ 53″ E.

ANCHORAGE: Refer Japanese chart No. 1223 (Ozue-wan and Hososhima-Ko).

RESTRICTIONS: Strictly no entry after sunset.

MAX. SIZE: Max. permissible LOA 170 m., draft 31 ft. 10 in. (9.7 m.)

HEALTH: At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers' health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically West bound vessel to Choshi and North bound to Nagasaki Radio respectively.

TUGS: Join vessel in position 32° 26.5′ N. 131° 39.5′ E. Tug's lines to be used.

BERTHING:

Industrial Port	
Wharf No. 1	depth 9.80 m.
Wharf No. 2	depth 9.50 m.
Wharf No. 3	depth 5.70 m.
Wharf No. 4	depth 5.70 m.
Wharf No. 5	depth 7.50 m.
Wharf No. 6	depth 9.70 m.
Hyuga Refinery's Wharf	depth 9.90 m.
Sugar Plant Wharf (Dolphin)	depth 9.45 m.
Commercial Port	
Wharf No. 1	depth 5.8 m.
Wharf No. 2	depth 6.8 m.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gears not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1630 – 2130 hrs. (60%) additional of basic stevedorage; 2130 – 0500 hrs. next morning 130% additional; Sundays/holidays 100% additional.

MEDICAL: No advance notice required unless urgent.

DENSITY: Average 1025 in Winter, 1020 in Summer, subject to weather and tide current.

FRESH WATER: Available from dock, 20/30 t.p.h.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest stock ports at maximum 7 days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and net tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: No local representatives.

REPAIRS: None.

REPATRIATION: Possible.

AIRPORT: Nearest, Miyazaki airport about 2 hours drive from Hososhima. JAL and ANA lines.

TIME: GMT plus 9 hours. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police 110; Ambulance 119; Fire 119. Public telephone booth available near by the berth.

TELEPHONES: No facilities for placing telephones on board.

SHORE LEAVE: Local Immigration Officers issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port Administration Office.

AGENTS: Sub-Agents of Dodwell & Co. Ltd., Tokyo. Hakko Unyu Co. Ltd., No. 731, Kaigan-dori, Hososhima Hyuga-shi, Miyazaki-ken (883). Cable Address: "Ringer Hyuga". Domestic Telex: 776677 Hakko Hyuga. Tel.: Hyuga (09825)2–2185.

IHO: 34.45 N. 134.46 E.

NO VESSELS CALLING AT THE PRESENT TIME – FACILITIES NOT IN USE SINCE 1973.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Stores List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agents will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agents should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Inland Sea Pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from 1 of 3 pilot stations dependent upon vessel's last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as harbour Pilots up to berth or anchorage at destination.

Note: No VHF communication available with Inland Sea Pilot stations. Also see "Shipmasters Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits) Position 34° 38′ N., 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse. (Vessels transitting Bungo Channel). Position 33° 13′ N., 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible, having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimoneseki) Straits. Position 33° 56′ 14″ N., 131° 03′ 12″ E.

ANCHORAGE: Closed Port. Agent will arrange Anchorage position for discharging, with Authorities, but usual position Iho signal station, bearing 215° distant 3,000 m. (signal stn. 34° 44′ 58″ N., 134° 46′ 12″ E.).

HEALTH: Pratique must be obtained at another Port before calling Iho.

At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers' health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Not required. Discharging at Outer Anchorage.

TANKERS: Port is operated for oil discharging only. Discharge is into barges through 6 in. hoses at either side of vessel.

DENSITY: Average density is between 1025 and 1026 in Winter season and between 1018 and 1020 in Summer season.

FRESH WATER: Not available.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunker will be lightered from the nearest stock ports at maximum 7 days prior notice.

REPAIRS: Not available.

DRY DOCK: Nearest dockyard at Aioi.

AIRPORT: Nearest airport at Osaka.

TIME: GMT plus 9 hours, no alterations.

POLICE/AMBULANCE/FIRE: Police tel. 07944/2-3377; Ambulance, 119 or 2-2101; Fire 119 or 2-2101.

SERVICES: None. Nearest services available at Kobe/Osaka area.

AGENTS: See "Himeji".

IMABARI (Imahuru): 34.04 N. 133.00 E. (incl. Mategata). (See Plan Book)

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Inland Sea pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from 1 of 3 pilot stations dependent upon vessels last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination.

Note: No VHF communication available with Inland Sea Pilot stations. Also see "Shipmaster's Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits) Position 34° 38′ N. 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse. (Vessels transitting Bungo Channel), Position 33° 13′ N. 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki pilot station.

3. Hesaki, at East side of Kanmon (Shimonoseki) Straits. Position 33° 56′ 24″ N. 131° 03′ 12″ E.

ANCHORAGE: Anchorage outside breakwater, sufficient water, but on account fast current deemed not safe anchorage. Anchorage inside breakwater generally shallow, and sea area narrow for large vessels. To discharge logs only Temposan wharf available for vessels alongside berth where holding ground is good and depth of water is 7.50 m.

Vessels drawing over 7 m.: vessel can enter Mategata (open road) deemed to be most fitted place for vessels entry to discharge logs. Port of Mategata faces Aki-Nada and located near West entrance of Kurushima Channel; 132° 55′ E., 36° 06′ N., where holding ground good and depth of water 12–20 m. is kept.

RESTRICTIONS: No entry after dark.

MAX. SIZE: Temposan Wharf length 110 m., breadth no limit, draft 7 m. Mategata (open road) length no limit, breadth no limit, draft 10 m.

HEALTH: At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards and Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers' health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Temposan wharf: join vessel at sea anchorage, using tug's line without charge. Mategata (open road): no tug required in normal conditions.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio. Also see "Max. Size".

Kurashiki Wharf:

Section	*Length (m.)*	*Depth (m.)*
1	165	9.0
2	140	7.5
3	187	5.5
4	270	5.5

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

DENSITY: Temposan wharf 1015. Mategata 1015.

FRESH WATER: Fresh water not available but usually brought by barge from Onomichi (about 4 hours run to Imabari/Mategata). Rate of delivery 80 tons to 200 t.p.h. dependent on barge.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and net tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: See "Kobe".

REPAIRS: Only minor repairs.

DRY DOCKS: Not available at this port, the nearest ones are Kawasaki Heavy Industries Ltd., Sakaide; Hitachi Shipbuilding & Engineering Co. Ltd., Innoshima; and Mukaishima; dimensions of these docks as follows:

Kawasaki Heavy Industries Ltd., Sakaide. Dock No. 2 for 500,000 d.w.t. vessel. 450 m.×72 m.×12.3 m. It is not in action yet for ships to repair. Only used presently for shipbuilding and after services.

Hitachi Shipbuilding & Engineering Co. Ltd., Innoshima Dock, Dock No. 1 for 20,000 d.w.t. vessel. 175 m.×25.62 m.×9.10 m. Dock No. 3 for 130,000 d.w.t. vessel. 282.50 m.×47 m.×11.33 m.

Hitachi Shipbuilding & Engineering Co. Ltd., Mukaishima Dockyard, Dock No. 1 for 3,000 d.w.t. vessel. 86.18 m.×13.60 m. ×6.80 m. Dock No. 2 for 8,500 d.w.t. vessel. 125 m.×18 m.×7.40 m. Dock No. 3 for 25,000 d.w.t. vessel. 175 m.×29 m.×9 m.

REPATRIATION: Possible.

AIRPORT: No airport. Nearest airports are Matsuyama and Takamatsu where are All Nippon Airways.

TIME: GMT plus 9 hours. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police Tel. 110; Ambulance 119; Fire 119.

TELEPHONES: No facilities for placing telephones on board.

GENERAL: Mategata is a closed port. To conform with regulations, vessel obtains permission from Shikoku Maritime Bureau to enter.

Customs request vessels calling Mategata to obtain permission to enter at preceding port of call by paying charge at same rate of tonnage dues prior to arrival of vessel. Application undertaken by Agent.

No quarantine available. Nearest station Matsuyama. No Immigration. Officer comes from Niihama.

SERVICES: None.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port Administration Office.

AGENT: See "Matsuyama".

INNOSHIMA: 34.17 N. 133.11 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Stores List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords etc. (only at first port of call in Japan).

Ship's Agents will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in Transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Inland Sea Pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from one of three pilot stations dependent upon vessel's last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication with Inland Sea pilot stations. Also see "Shipmasters Report" before first port.

Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits) Position 34° 38′ N., 135° 11′ E. Telegraphic address "Anjin Kobe".

Sekisaki, 3 miles South of Sekisaki lighthouse (vessels transitting Bungo Channel). Position 33° 13′ N., 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible, having due regard to safety, to Sekisaki pilot station.

Kanmon Pilot boards at Mutsure (33° 58′ 15″ N., 130° 53′ 43″ E.) for passing Shimonoseki Strait to Hesaki where Pilot will be changed to Inland Sea Pilot.

Hesaki, at East side of Kanmon (Shimonoseki) Straits. Position 33° 56′ 24″ N., 131° 03′ 12″ E.

ANCHORAGE: No. 1. 14 m. deep, 1.4 miles off Hyakkan Island 180°. No. 2, 9 m. deep, 1.5 miles off Hyakkan Island 290°.

RESTRICTIONS: In general, mooring/unmooring and dry-docking in-and-out carried out in daytime only.

MAX. SIZE:

	Length	Breadth	Draft
(1) For mooring only	320 m.	× 50 m.	× 7 m.

(2) Max. draft for entering port: 9 m.
(3) Max. draft for mooring: 5–7 m. according to quay.

Current is N.E. at high tide, and S.W. at low tide at max. 2.5 knots.

HEALTH: In event vessel proceeding Innoshima direct from foreign port, vessel to receive pratique at Quarantine anchorage Kobe or Saganoseki (33° 15′ N., 131° 52′ E.) or Mutsure (33° 59′ N., 130° 53′ E.).

At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers' health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which covers all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Ship taken into port by Dock Master who joins ship at anchorage with tug-boat. Usually tug's lines used.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

TANKERS: Tank cleaning station operated by Setonaijai Tank Cleaning Company, can receive slops up to rate of 250 t.p.h.

MEDICAL: No advance notice required unless urgent. Hospital facilities available.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.

FRESH WATER: Available by barge.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: All facilities for major repairs.

DRY DOCKS: Hitachi Zosen:

	Length (m.)	Width (m.)	Depth (m.)	Capacity (d.w.t.)
Dock No. 1	175	25.60	9.10	21,000
Dock No. 2	282.50	47.00	11.30	130,000
Dock No. 3	260.00	57.00	11.10	100,000

AIRPORT: Hiroshima Airport or Okayama Airport (domestic only). About 2 hours by car from both airports.

TIME: GMT plus 9 hours. Permanent.

TELEPHONES: Telephone is available: Shipyard installs one telephone in accommodation and another one in engine room.

SHORE LEAVE: Local Immigration offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

SERVICES: The following services are available: Tank cleaning, Discharge of tank washings, Compass adjustment, Ship's chandler.

AUTHORITY: Mihara Doboku (Public Works) Office.

AGENT: Sub-Agent of Dodwell & Co., Tokyo. Hamaoka Kaiun Co., Ltd., 2207, Habu-cho, Innoshima-shi, Hiroshima-ken. Cable address: Hamaoka Innoshima; Tel.: Innoshima (08452) 2–1340/2. Telex: 6499–94.

ISHINOMAKI: 38.23 N. 141.16 E.

DOCUMENTS: and all general information, refer to "Ofunato".

PILOTAGE: Not compulsory. Pilots board at 38° 23′ 42″ N.; 141° 16′ 06″ E.

RESTRICTIONS: Channel depth 9 m. LW.

HEALTH: Radio pratique available. Formalities carried out at the Quarantine anchorage (38° 23′ 15″ N., 141° 17′ 05″ E.).

TUGS: Available from Shiogama (1×2,200 h.p.).

BERTHING:

Berth	Length (m.)	Depth (m.)	Permissible Draft (m.)	Capacity G/T	Shore Cranes & Pipe-lines
Minami Hama Wharf (1) (For chip carriers)	165	10.0	9.5	30,000	
Minami Hama Wharf (2)	165	9.0	9.0	10,000	
Minami Hama Wharf (3)	120	4.5	4.5	1,000	(2 berths)
Hiyori Wharf (1)	165	9.0	9.0	10,000	2× Pneumatic Unloaders
Hiyori Wharf (2)	380	4.5	4.5	1,000	(6 berths)
Nakajima Wharf	370	10.0	10.0	15,000	(2 berths)
Shiomi Wharf	300	4.5	4.5	1,000	(4 berths)
Jyujyo Wharf	70	6.0	6.0	1,000	1×Pipe-line
Tekkosha Wharf	50	4.5	4.5	500	1×Pipe-line

FUEL: Domestic oil is available; bonded oil will be brought from Shiogama, when required.

FRESH WATER: Available from shore and by barge.

REPAIRS: Minor repairs possible.

AUTHORITY: Port Administration Office.

AGENT: Sub-agent of Dodwell & Co., Tokyo. Nanko Unyu Co. Ltd., 13-banchi, Shiomi-cho Ishinomaki-shi, Miyagi-ken. Cable Address: Nanko Ishinomaki. Domestic Telex: 8628-60. Tel: (0225) 96-3815. Postal No.: 986.

IWAKUNI, Hiroshima Bay: 34.10 N. 132.11 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agents will prepare Inward/Outward Declaration, Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory. Pilots available at Quarantine Anchorage, when required.

Inland Sea Pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to Pilot station. Cable address "Ansin Moji". Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from 1 of 3 Pilot stations dependent upon vessels last port of departure and at Master's discretion. Pilotage available throughout, 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations. Also see "Shipmaster's Report before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits). Position 34° 38′ N. 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse (vessels transitting Bungo Channel). Position 33° 13′ N. 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimonoseki) Straits. Position 33° 56′ 24″ N. 131° 03′ 12″ E.

ANCHORAGES: 2 anchorages, 1 for "Quarantine" and repairing, etc., other for discharging logs.
(a) Quarantine 34° 10′ 28″ N., 132° 16′ 43″ E. min. depth 27 m.
(b) Discharging area 34° 11′ 12″ N., 132° 14′ 21″ E. min. depth 10 m.
Nature of bottom mud. Minimum bottom width no limit.

RESTRICTIONS: Day and night entry possible.

HEALTH: Radio pratique available. At first port of call in Japan vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Tugs normally join vessel at Quarantine area. Tug's lines to be used free of charge. 6 tugs available, 4×3,000 h.p. and 2×2,500 h.p.

BERTHING: No berthing from sunset to sunrise. At least 2 hours notice arrival necessary to reach berth, in event of direct arrival from foreign country.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*& Length (m.)*	*Capacity d.w.t.*	*Shore Cranes and Pipe-lines*
Public, Iwakuni North No. 3 Wharf	100	9.0	9.0	150	20,000	1×10T
Sanyo-Kokusaku Pulp Logs Pier	160	7.5	7.5	150	25,000	
Sanyo-Kokusaku Pulp Chips Pier		11.5	11.5	200	40,000	
Public, Iwakuni -10M Bussen-Futo	185	10.0	10.0	180	20,000	
Public, Iwakuni -5.5M Bussen-Futo	150	5.5	5.5	150	3,500	

MEDICAL: No advance notice required unless urgent.

TANKERS: Max. 150,000 d.w.t.; slop discharge pipe-lines.

	Max. d.w.t.	*Max. LOA*	*Max. safe draft*	*No. and diameter hoses*
Koa Oil Crude Pier	150,000	No limit	16.50 m.	12″×3
Koa Oil No. 3 Pier	20,000	250 m.	10.50 m.	8″×1
Kenei North No. 3 Pier	35,000	230 m.	9.00 m.	10″×2

Discharge rates:

Koa Oil Crude Pier	(Crude Oil)	6,000 t.p.h.
Koa Oil No. 3 Pier	(Low sulphur Fuel Oil)	600 t.p.h.
Kenei North No. 3 Pier	(Crude Oil)	500/800 t.p.h.

DENSITY: 1020.

FRESH WATER: Available at:
Koa Oil Private Crude Oil Pier.
Koa Oil Private Products Pier No. 3.
Public, Iwakuni North No. 3 Wharf.
Sanyo-Kokusaku Pulp Private Logs Pier.
Sanyo-Kokusaku Pulp Private Chips Pier.
Water barge arrangeable from Onomichi.

FUEL: Available ex-wharf, but not ex-barge. All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.

DEVELOPMENTS: New berth named "Muronoki Pier" under construction.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gears maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CARGO GEAR: See "Certificates" but no special requirements.

CONSULS: No consul but marine note of protest can be attended by local notary public.

REPAIRS: Minor repairs possible.

REPATRIATION: Possible.

AIRPORT: Hiroshima airport 45 km. (Abt. 2 hours).
For Osaka (TOA Airline) 0900 hrs., 1415 hrs., 1725 hrs., 2000 hrs.
For Tokyo 0750 hrs., 1100 hrs., 1355 hrs., 1510 hrs., 1755 hrs., 1905 hrs.

TIME: GMT plus 9 hours. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police 110 (just dial); Ambulance 119 (just dial); Fire 119 (just dial).

TELEPHONES: No arrangements available except Koa Oil.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port Administration Office.

AGENTS: Sub-agents of Dodwell & Co., Tokyo. Naigai Unyu Co. Ltd., Iwakuni Office, 7-35, 4-chome, Shinminato-cho, Iwakuni-shi, Yamaguchi-ken. Cable address: Naigai Iwakuni; Domestic Telex: 6672-39, Naigaiunyu Iwa; Tel.: Iwakuni (0827) 21-7115/6.

KAGOSHIMA: 31.35 N. 130.33 E.

DESCRIPTION: Port situated in Kagoshima Bay, the Southern part of Kyushu and consists of 3 sections as follows:

Main Harbour: divided into Inner Harbour sheltered by breakwaters which can accommodate up to 3,000 tonners, and Outer Harbour, (open roads) where large size vessels lie at anchor.

New Harbour: adjacent to Main Harbour on the South. This section also sheltered by breakwaters and a 10,000 tonner can be accommodated.

South Harbour: located about 6 kms. away from main harbour on South and used for small coasters.

DOCUMENTS:
Customs: When vessel arrives direct from foreign port, customs officials board for search. Following documents to be submitted:
Crew List.
Passenger List.
Manifest of crew personal effects (must be signed by individual Crew member).
Store List.
Arms and Ammunition List.
Narcotics List.
List of ports of Call on current voyage.
Discharging Cargo Manifest.
Through Cargo Manifest.
Declaration inward/outward.

Following will be checked on board: Ship's Registry; Last Port Clearance.

When vessel comes from Japanese port, Customs officials will not attend on board, except special case. Master or Agents to attend Custom House for entry formalities with following documents:
Discharging Cargo Manifest.
Through Cargo Manifest.
Declaration inward/outward.
Ship's Registry.
Last Port Clearance.
Documents entrusted with the Master by Customs at previous port.

On vessel's departure, a clearance is issued by Customs, after confirming payment of tonnage dues.

PILOTAGE: Not compulsory, but necessary unless Master well acquainted with locality. Pilot embarks at quarantine anchorage (see "Health"). Request for Pilot made through Agent. Master report by radio accurate ETA at least 24 hours prior to arrival.

ANCHORAGE: Ample good holding anchorage available in Outer Harbour. Depth: Over 9 m.

RESTRICTIONS: Berthing/unberthing possible day and night.

HEALTH: Radio Agent for free pratique not less than 12 hours and not more than 36 hours before arrival, advising full details of vessel and health condition on board. When free pratique is granted by radio vessel will be required to submit the following documents to Quarantine Officer on arrival:
Maritime Declaration of Health.
Crew List.
Passenger List.

The following vessels will not be able to get radio pratique.

A vessel that has been in contact with an infected area or a suspected infected area within 15 days of arrival.

If a vessel has on board any case, or any suspected case of infectious disease, within 15 days of arrival.

If crew or passengers on board do not possess valid Smallpox Vaccination Certificate.

If a vessel does not possess a valid Derat or Derat Exemption Certificate.

Quarantine:
(a) Quarantine station: Sea area within radius of 1,000 m. from centre, position 31° 33′ 25″ N., 130° 35′ 33″ E.
(b) Quarantine service rendered from sunrise to 1 hour before sunset.
(c) "Q" flag should be hoisted until free pratique granted.
(d) When vessel arrives from plague-infected or suspected area within 10 days after she left such place, 24-hour special quarantine required.

All sanitary scuppers must be closed and garbage not thrown overboard after reaching 60 miles off Japanese coast.

RADIO: Recommended Captain contacts Agent through Choshi Radio or Nagasaki Radio which covers all ports in Japan. If Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: 3 tugs, 3,000 h.p., 2,400 h.p. and 1,000 h.p.

BERTHING: No specific requirements. Pilot boarding time will be notified by Agent mainly by radio.

New Port (Kagoshima-Shinko). Sheltered harbour with main entrance 150 m. wide between S. breakwater (350 m.) and N. breakwater (150 m.). Sheltered anchorage in depth of 5.5–9.0 m. No mooring buoy. Berthage outside breakwater in depth of 9.0 m. and inside breakwater in depth of 5.5–9.0 m.

Piers: South pier (in foreign trade zone, for outbound vessels only):
165 m. long with 9.0 m. alongside, will take one vessel of about 10,000 g.r.t.
260 m. long with 7.5 m. alongside, two vessels less than 5,000 g.r.t.
120 m. long with 4.5 m. alongside, two vessels less than 500 g.r.t.
North pier (for inbound vessels):

125 m. long with 7.5 m. alongside will take one vessel of about 3,000 g.r.t.

160 m. long with 5.5 m. alongside two vessels less than 1,000 g.r.t.

60 m. long with 4.0 m. alongside one vessel less than 500 g.r.t.

160 m. long with 5.5 m. alongside two vessels less than 1,000 g.r.t.

Taniyama Harbour: South pier has been constructed, located about 10 kms. from main harbour on South and used for large coasters.

Berthing: Sheltered harbour with main entrance 200 m. wide between S. breakwater (780 m.) and N. breakwater (650 m.). Sheltered anchorage in depth of 5.5–13 m. No mooring buoy. Berthage inside breakwater in depth of 5.5–12.5 m. South pier (in foreign trade zone, for outbound vessels only).

Name of Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*
Taniyama Port (Sect. 1)	250	12.0	11.5
	260	7.5	7.0
	270	5.5	5.0
	550	5.5	5.0
South Port	520	4.5	4.0
	180	5.5	5.0

STEVEDORES: Maximum 10 gangs available. Working hours: 0830–1630 hrs. (st shift); 1630–2130 hrs. (2nd shift); 2130–0600 hrs. (3rd shift). No work can be arranged for 31st December and during New Year holidays (1st to 3rd January).

MEDICAL: Hattanmaru Hospital; Fukusaki Hospital; Nagata Dental Plant. No advance notice required unless urgent.

TANKERS: No tanker berths at Kagoshima, but Central Terminal Station (C.T.S.) in Kagoshima Bay. See "Kiire".

FRESH WATER: One 150-ton water barge available. Hydrants at wharves in main harbour. Rate of delivery: 50 t.p.h. from barge; 15–20 t.p.h. from hydrants.

FUEL: Domestic oil is available; bonded oil will be brought from Moji with sufficient advance notice, when required.

GANGWAY/DECK WATCHMEN: Not specifically required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores open/close hatches. Cost per hour depending on type of cargo. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete before berthing.

CERTIFICATES: Ship's register to show Customs Inspector registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears poor.

CUSTOMS ALLOWANCES: Only 50 cigarettes to take ashore but no spirits.

REPAIRS: Only minor repairs – Kikukawa Iron Works and Kagoshima Dockyard Co.

REPATRIATION: Possible. Also see "Regulations".

AIRPORT: Kagoshima Airport. Short distance from town.

TIME: GMT plus 9 hours. No alterations to clocks during year.

HOLIDAYS: See "Tokyo" (Also see "Stevedores").

SERVICES: Cargo Survey. Provisions and Stores. Fumigation – Toyo Fumigation attend from Moji on request.

WIND/TIDE: N.W. wind prevails in Winter season and Easterly wind in Summer. Wet seasons in April and July. Average tidal range 2.74 m. In the outer harbour, flood tide sets to North and ebb to South. Maximum speed of current 2 knots. Current in inner harbour is less than 0.25 knots.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 day, but 3 day extension possible if vessel stays longer. Also see "Regulations".

REGULATIONS: Immigration officials board vessel on arrival to examine passports, discharge-books and/or other equivalent travel documents and provide 72-hour landing passes for crew members and passengers. 1 copy each of crew list and passenger list required by them. Providing ship's Agent with a crew list beforehand will be a great help in expediting immigration business on vessel's arrival. When vessel stays in port more than 72 hours. the landing passes may be extended 72 hours on application. In the event that crew members, without entry visas, are to be landed for repatriation or transfer, Immigration will not permit their landing unless passage, by either sea or air, ensuring the prompt departure from Japan (within 72 hours) of these men has been booked, or unless vessels to which they are to be transferred, arrive in Japan within 5 days.

AUTHORITY: Kagoshima Kencho.

AGENTS: Sub-agents of Dodwell & Co. Tokyo. Kyoshingumi Co. Ltd., Agency Department, Zisaki, Zyonan-cho, Kagoshima-shi, Kagoshima-ken. Cable address: Kyoshingumico Kagoshima; Domestic Telex: 7822–46. Tel.: (0992) 26–7124, 26–7115.

KAKOGAWA: 34.42 N. 134.50 E. (See Plan Book)

Port is for sole use of the Kobe Steel Co. Ltd. Declared open port as of 1st May 1970, but vessels should first call off Kobe to obtain free pratique, Customs clearance and Pilot.

DOCUMENTS:

Ship's Register.

Last Port Clearance.

3 Crew Lists including Passport Nos.

3 Passenger Lists.

1 Stores List.

1 Declaration of Crew's Baggage, i.e. tobacco wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Pilot will board off Kobe when calling for free pratique and Customs clearance. Pilot will be arranged by Agent subject advance request and usual ETA advices.

HEALTH: Vessel must call off Kobe for free pratique. At first port call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers' health condition to respective Quarantine office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which covers all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

RESTRICTIONS: Mooring/unmooring conducted daylight hours only.

BERTHING:

	Length	*Depth*
Pier E-1	200 m.	15.00 m.
Pier E-2	200 m.	14.00 m.
Pier E-3	300 m.	14.50 m.
Pier E-4	400 m.	17.00 m.
Pier W-4	220 m.	7.60 m.
Pier W-5	260 m.	11.90 m.
Pier W-6	270 m.	11.90 m.
LPG Dolphin	77 m.	16.00 m.
Scrap Pier	250 m.	11.10 m.
South Pier	450 m.	6.80 m.

3 unloaders are presently available. 2 have capacity of discharging 1,500 t.p.h. and the third 700 tons.

Depth at low water is 17 m. in the fairway which is 400 m. wide.

MEDICAL: Treatment has to be arranged from Kobe.

FRESH WATER: Available from quay. Rate 50–80 t.p.h.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay, and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

REPAIRS: Arranged from Kobe.

REPATRIATION: Possible, through Kobe.

TIME: GMT plus 9 hours. No alterations made to clocks during year.

SHORE LEAVE: Local Immigration offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

SHIPMASTER'S REPORT:

When the vessel anchors off Kobe in the roads, "Kobe Harbour Control" will call on VHF Channel 16 and ask for anchoring time and position from Kobe headlight.

The maximum draft at Higashi Harima is 15.5 m.

Vessels always berth port side alongside. The gangway should be lowered as soon as possible to let the officials aboard.

The vessel loaded 112,000 metric tons in 60 hours, previously the same amount had been loaded a little quicker.

Bilge water, oil or garbage should never be thrown overboard because owners have to pay compensation to the Fishermen's Union.

Berthing takes place 2 hours before high water.

AUTHORITY: Kakogawa Doboku (Public Works) Office.

AGENT: See "Himeji".

KAMAISHI: 39.16 N. 141.55 E.

DOCUMENTS:

Ship's Register. Last Port Clearance. 3 Crew Lists including Passport Nos. 3 Passenger Lists. 1 Store List.

1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Pilot not compulsory, but arrangeable at Master's request. Pilot arranged by Agent and vessel required to radio Agent ETA 24 hours before ship's arrival. Pilot boat has no facility to communicate, nor particular light or sound signals, but flies Pilot flag "H". Pilot boards at 39° 16′ N. 141° 59′ E. 1 mile off Osaki Point. No alternative area in event bad weather.
ANCHORAGE: Up to four 30,000 d.w. tonners can safely anchor. Depth of water: 31–43 m. at Quarantine anchorage. 20–27 m. at discharging anchorage.
RESTRICTIONS: Vessel free in and out anytime.
MAX. SIZE: Draft 14 m. and LOA, 200 m. (656 ft.) Breadth no restriction. Vessels with draft exceeding 9 m. required to berth on high water.
HEALTH: Formalities will be carried out at the anchorage 500 m. outside of Harbour Line. (39° 15′ 3″ N., 141° 55′ 1″ E.)
RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.
TUGS: Tugs (2) join vessel at anchorage and tugs' lines used free of charge.
BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Capacity (g.t.)*	*Shore Cranes*
South Pier					
NSC No. 3 Old	230	8.4	8.4	13,000	1×7 T, 1×15 T
New	138	13.5	13.0	35,000	d.w. Unloader 700 T/hr.
NSC No. 4 Old	230	8.7	8.7	20,000	2×7 T, 1×17 T
New	138	14.0	14.0	55,000	d.w. Unloader 700 T/hr.
North Pier					

NSC Nos. 1 & 2 Not suitable for the vessel more than 5,000 G/T.

STEVEDORES : At least 24 hours prior notice excluding Sundays and holidays required in order for Agents to arrange stevedores. Vessel must constantly keep Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700-1900 hrs. 50% additional of basic stevedorage; 2100-0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.
MEDICAL : No advance notice required unless urgent.
DENSITY : Winter 1026-1027. Summer 1023-1024.
FRESH WATER : Available from wharf by hose. Rate of delivery: about 10-15 t.p.h. No water barge, but in case vessel requires water at anchorage, tugboat arrangeable for that purpose.
FUEL : Domestic diesel oil (Bunker A) is available. Bonded oil will be brought from Sendai or Yokohama with sufficient advance notice.
OPENING/CLOSING HATCHES : Stevedores carry out opening and closing hatches. Cost depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.
CERTIFICATES : Ship's register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.
CUSTOMS ALLOWANCE : Only allowed 50 cigarettes to take ashore but no spirits.
CONSULS : None.
REPAIRS : Minor repairs such as welding, piping, lathing works etc. only.
DRY DOCKS : None.
REPATRIATION : Possible.
AIRPORT : Hanamaki, distant 100 km. (2 hours by car). One flight between Hanamaki/Tokyo on Tuesday/Thursday/Saturday and two flights on Sunday/Monday/Friday by All Nippon Airline (ANA).
TIME : GMT plus 9 hours. No alterations made to clocks during year.
POLICE/AMBULANCE/FIRE : Police 2-4536 (Headquarter) and 2-3828 (Water Police Station); Ambulance 119; Fire 119.
TELEPHONES : No facilities for placing telephones on board.
SERVICES : Surveyor, Tally, Hold cleaning, Tank cleaning.
GENERAL : Discharging ex-gearless vessel not possible at anchorage.
SHORE LEAVE : Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.
AUTHORITY : Port and Harbour Dept.
AGENTS: Sub-agents of Dodwell & Co. Ltd., Tokyo. Narasaki Sangyo Co., Ltd., Kamaishi Branch, Kamaishi Building, No. 1-1, Hama-cho Kamaishi-shi, Iwate-ken. Cable Address: Narasaki Kamaishi. Domestic Telex: 8355-56. Tel.: (0193) 22-2731/2. Postal No.: 026.

KANDA: 33.47 N. 131.00 E.

RESTRICTIONS: Main channel length 11,080 m., width 200 m., depth 9 m.

Tidal range 3.2 to 3.3 m.

BERTHING: Main berths dredged to 9 m. alongside. Berths mostly used for importing lumber.

KANMON-KO (Kanmon Harbour).

According to Japanese Harbour Area Regulations, Moji, Shimonoseki, Kokura, Tobata, Wakamatsu and Yawata are respective sections included in one port namely Kanmon Harbour. The expression of the port as "Kamon" has been used in charter parties, where these six ports are considered to be one port. Vessel's movements within these ports is treated as shifting berth in the same port. Therefore, if vessels calls at more than 2 ports within this area, such calls are covered by one payment of tonnage dues. However, at Tobata, Wakamatsu and Yawata, port dues are levied in addition to tonnage dues.

Entry/departure procedures to Customs, Immigration and/or Harbour Master should be effected at each port, as those officials stationed individually at each port.

KANOKAWA: 34.11 N. 132.26 E.

DOCUMENTS:
Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.
PILOTAGE: Inland Sea pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from 1 of 3 pilot stations dependent upon vessels last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. *Note:* No VHF Communication available with Inland Sea Pilot stations. Also see "Shipmasters Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits). Position 34° 38′ N. 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse. (Vessels transitting Bungo Channel.) Position 33° 13′ N. 131° 54′ E. Telegraphic address "Anjin Moji". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimoneseki) Straits. Position 33° 56′ 24″ N. 131° 03′ 12″ E.

Inland Sea Pilots also attend Harbour Pilotage but if specifically required Harbour Pilot boards at Port entrance South side of Ohkurokamishima, Position 34° 10′ N. 132° 26′ E.
ANCHORAGES: Good holding ground. Entrance channel and Harbour Channels. Depths 18 m. min. Bottom mud and sand. Difference between quoted datum and chart datum about 2 m. (to be added). Harbour anchorage about 2 miles South of "T" head berth where vessel remains if waiting berth.
RESTRICTIONS: No berthing or unberthing between sunset and sunrise.
MAX. SIZE: Length 240 m., beam 30 m., draft 13 m., deadweight 125,000. See "Tankers".
HEALTH: Closed port. Vessel must call at another port (Such as, Matsuyama or Iwakuni) for Customs and Health clearance before entering Kanokawa. At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers' health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

N.B. Vessels destined to Kanokawa have called at Kure Quarantine Anchorage for free pratique and customs' clearance before proceeding to Kanokawa. The above practice is not only a loss of time (50 miles deviation) but dangerous for vessels to transit in a congested traffic area. In view of the above, the practice was amended and vessels from now on must call at Matsuyama or Iwakuni instead of Kure for Customs and Quarantine clearance.
RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically West bound vessel to Choshi and North bound to Nagasaki Radio respectively.
TUGS: Arranged from Kure. Normally join at Kanokawa Port entrance. Usually tug's lines used without extra charge.

TANKERS:

Berth	Length (m.)	Depth (m.)	Permissible Draft & LOA (m.)	Capacity	Pipe-lines
Mitsubishi Shoji Kanokawa No. 1	30	13.2	12×240	Less than 30,000 d.w.t.	See below
No. 3	130	15.4	14×270	Less than 125,000 d.w.t.	
Nos. 2 & 4		7.0		For Coastal Tanker use only, 5,000 d.w.t.	

Pipe-lines:	*No. 1*	*No. 3*
Size and number of manifold	1×12 in.	5×12 in.
Size and number of shore line	1×16 in.	2×24 in.
Max. back pressure on shore gauge	5.0 kg/sq.cm.	10.0 kg/sq.cm.
Average speed for discharging	2,000 kl/hr.	5,000 kl/hr.

DENSITY: 1023–1025 alongside berth. Rise of tide: Springs 3.4 m. Neaps 2.6 m.
FRESH WATER: Available at berth, ex-pipe-line. Average delivery rate – 20 t.p.h.
FUEL: Most grades of domestic and bonded oil obtainable by barge only at anchorage after completion of discharge, with 3 days advance notice.
CONSULS: None.
REPAIRS: See "Kure".
AIRPORT: Kure.
TIME: GMT plus 9 hours. Permanent.
POLICE/AMBULANCE/FIRE: Police 2005; Ambulance 2711; Fire 2711.
TELEPHONES: No arrangements available for placing telephones on board.
AUTHORITY: Ohgaki Doboku (Public Works) Office.
AGENTS: See "Kure".

KASHIMA: 35.54 N. 140.42 E. (See Plan Book)

DOCUMENTS:
Ship's Register.
Last Port Clearance.
5 Crew Lists including Passport Nos.
5 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.
PILOTAGE: Pilot called through Agent. Pilot boards about 2 miles to N.E. from the end of breakwater, in position 35° 58.5′ N. 140° 44′ E.
ANCHORAGE: No suitable anchorage at present Quarantine Anchorage located at section between 183° and 279° from the undermentioned centre within a circle of radius of 1,300 m. centering the position of 35° 57′ 19″ N., and 140° 42′ 30″ E., where depth of water, 18 m.
RESTRICTIONS: Pilot does not board vessel after dark.
MAX. SIZE: *Tankers:*

Berth	*Max. d.w.t.*	*Max. L.O.A.*	*Max. Safe Draft*
200,000 ton Sea Berth	200,000	No Limit	19.00 m.
100,000 ton Berth	100,000	No Limit	14.50 m.
70,000 ton Berth	70,000	No Limit	13.30 m.

Bulk carriers have entered with draft up to 44 ft.
HEALTH: Radio pratique is available if application in accordance with Japanese Regulations. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers' health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.
RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel to Choshi and Northbound to Nagasaki Radio respectively.
TUGS: Usually joins vessel at anchorage where Pilot boards; ship's lines used.
BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Sumitomo Metal	Depth	16.0 m.
Sumitomo Metal	,,	12.0 m.
Kashima Denkai	,,	16.0 m.
Kashima Sekiyu	,,	16.0 m.
Zenno Silo	,,	11.5 m.
Showasangyo Silo	,,	11.5 m.

MEDICAL: No advance notice required unless urgent.
TANKERS: Requirements prior to arrival: Manifold: position, number and external and internal diameters. Reducer: type (ASA or JIS etc.) and external and internal diameters. Bolt: diameter and number, also diameter of pitch circle. Pumping capacity. Ship's draft and ETA, to be received by 0900 hrs. every morning continued 3 days prior to day of arrival. Water requirement (because of necessity of pumping-up tank for preparation).
Discharge Rates:

Berth	*Product*	*Discharge Rate (t.p.h.)*	*Shoreline*
200,000 Ton Berth	Crude Oil	10/12,000	38 in.×1
			42 in.×1
100,000 Ton Berth	Crude Oil	4/6,000	24 in.×1
		4/6,000	26 in.×1
	Bunker	5/600	8 in.×1
70,000 Ton Berth	Naphtha White Kerosene	1,800	14 in.×1
	Minus Crude Oil	3/3,500	16 in.×1
	Fuel Oil	1,800/2,000	20 in.×1
	Crude Oil	3/3,500	20 in.×1
	Bunker	5/600	8 in.×1

DENSITY: 1025.
FRESH WATER: 50 metric t.p.h. from shore pipe, 50% additional for service between 0600–0800 hrs. 1700–2200 hrs. and during rainy and rough weather, also on Sundays and holiday. 100% additional for service between 2200–0600 hrs.
FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice. Bunkers are also available from Kashima Oil Co. with prior notice.
FIRE PRECAUTIONS: No special precautions, but water curtain made alongside dolphin in case, and there is an extinguisher-boat (15 gross tons, and airfoam system).
DEVELOPMENT: Port under construction. When completed, total length of wharf will be about 17 km. for about 30 big industries such as iron and steel works, oil refinery and chemical works, foodstuff and foodstuff industries, etc.
GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.
CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.
CUSTOMS ALLOWANCE: Only allowed 40 cigarettes to take ashore but no spirits.
IDENTIFICATION CARDS: Not required.
CONSULS: None.
REPAIRS: Arranged from Tokyo/Yokohama.
AIRPORT: Narita Airport (New Tokyo International Airport).
TIME: GMT plus 9 hours. No alterations made to clocks during year.
POLICE/AMBULANCE/FIRE: Police Tel. 110; Ambulance/Fire Tel. 119.
TELEPHONES: Not available for placing on board.
SERVICES: No equipment nor facilities, but compass adjusting and others arrangeable from Yokohama.
SHORE LEAVE: Local Immigration Offices issue shore pass valid for 9 days, extension possible for longer stay.
AUTHORITY: Kashima Port Development Office.
AGENTS: Sub-agents of Dodwell & Co. Ltd., Tokyo. Keiyo Shipping Agency Ltd., Kashima Office, 65-86 Kamisu, Kamisu-Machi, Kashima-Gun, Ibaraki-Ken. Cable Address: Keiyoshipkashima Itako Domestic Telex: 3658-926 Tel.: Kashima 02999 2-2193.

KAWASAKI: 35.32 N. 139.42 E.

Also refer to Yokohama.
PORT LIMITS: Consists of sea and rivers below the most downstream bridges bordered by the coastline, the line drawn between the administrative areas of Tokyo and Yokohama and the point 126°, 2,260 m. from the Hane-da light buoy, the line drawn 233°, 9,360 m. from the above-mentioned point, the line drawn 151° 30′ from the end point of Sakai Channel which divides Yokohama City administrative section from Kawasaki City. (The river of Tama is included.)
DOCUMENTS: *Quarantine Station*
Quarantine Declaration.
Crew List.
Passenger List.
Deratting Exemption Certificate and Vaccination List.
Immigration Office
All Seamen's Books and Passports.
Declaration Inward Outward of Vessel.
Crew List.
Passenger List.
Application for shore pass.
Custom House.
Last Port Clearance.
Ship's Register.
List of Tobacco.
Narcotics List.
Revolver List.

Declaration Inward Outward of Vessel.
Crew List.
List of Ship's Stores.
Cargo Manifest.
Passenger List.
List of Crew's Baggages or List of Personal Effects.
Through Cargo Manifest.

PILOTAGE: See "Yokohama".

RESTRICTIONS: Tsurumi passage 11.70 m. (high water); Kawasaki passage 12 m. (high water). At night except in an emergency, vessels over 500 g.t. shall not enter port between hours of sunset and sunrise unless permission previously obtained from Captain of the Port. Vessels over 500 g.t. may enter without prior notice in order avert sea disaster or other unavoidable circumstance.

Note: No vessel of more than 1,000 g.t. permitted enter through Kawasaki Passage from 0630 hrs. to 0900 hrs. No vessel of more than 1,000 g.t. permitted depart through Tsurumi Passage from 0630 hrs. to 0900 hrs.

MAX. SIZE:

Passage	*G.R.T.*	*LOA*	*Draft*	*Remark*
Kawasaki	—	up to 250 m.	12 m.	high water
	up to 50,000	—	11.7 m.	,,
Tsurumi	—	up to 250 m.	11.7 m.	,,
	over 50,000	up to 270 m.	11 m.	,,

Tankers:

Berth	*Max. d.w.t.*	*Max. LOA*	*Max. Safe Draft*
Keihin Kawasaki Sea Berth	200,000	No Limit	27.00 m.
Toa Nenryo Ohgishima Sea Berth	250,000	No Limit	20.50 m.
Toa Nenryo Pier	No Limit	250 m.	12.00 m.
Toa Nenryo Ukishima Sea Berth	100,000	No Limit	17.00 m.
Toa Oil No. 3 Factory	No Limit	225 m.	11.70 m.
Toa Oil No. 1 Pier	No Limit	225 m.	11.70 m.
General Sekiyu Seisei	No Limit	250 m.	12.00 m.
Mitsubishi Oil	No Limit	260 m.	11.00 m.
		225 m.	11.70 m.
Mitsubishi Shoji	No Limit	250 m.	12.00 m.
Nissho Iwai	No Limit	250 m.	12.00 m.
Idemitsu Oil	No Limit	200 m.	9.00 m.
Showa Oil	20,000	170 m.	8.30 m.

HEALTH: Available at Kawasaki (same procedure as Yokohama).

RADIO: Available at Kawasaki (same procedure as Yokohama).

VHF: VHF radio telephone station under joint control of Tokyo, Kawasaki, Yokohama and Chiba Port and Harbour Bureau. Call Sign. "Kawasaki Port Radio." This station covers all Tokyo Bay with radius 50 km. from location of transmitting antenna (Yokohama). Station keeps in touch with ships crossing in vicinity of Nojimasaki Point and is able to communicate with a ship that is a fairly long distance South of Jyogashima Island.

Channels, Class, Frequencies.

	Channel	*Class*	*Frequencies used by ship*	*Frequencies used by coast*
Calling	16	F3	156.80 Mc/s.	156.80 Mc/s.
Working	12	F3	156.60 Mc/s.	156.60 Mc/s.
	14	F3	156.70 Mc/s.	156.70 Mc/s.
	20	F3	sending 157.00 Mc/s. receiving 161.60 Mc/s.	sending 161.60 Mc/s. receiving 157.00 Mc/s.
	22	F3	sending 157.10 Mc/s. receiving 161.70 Mc/s.	sending 161.70 Mc/s. receiving 157.10 Mc/s.

Port official in charge of Marine Operation Section, Port and Harbour Bureau, City of Yokohama or Kawasaki or Tokyo Metropolis or Chiba Prefecture will give ships necessary instruction relating to Port Operations Services. No charge for communication in regard to Port Operations Services (Not commercial service).

If commercial service required, call "JBK" Tokyo on Channel 26.

TUGS: Normally join vessel at anchoring position. Ship's lines used.

BERTHING: Vessels of more than 1,000 g.r.t. having explosive or other dangerous cargo on board desiring to enter First Section of Kawasaki, and Fourth Section, Yokohama Quarter, shall report expected time of arrival off Tsurumi Passage in advance to Captain of Port. When intending shift berths within First Section of Kawasaki and Fourth Section, Yokohama or to depart, the estimated time of getting under way shall also be reported in advance to Captain of Port. Report shall be made by noon of day before estimated date of entry or getting under way.

Municipal Piers	*Depth*
1	7.5 m.
2	9.0 m.
3	10.0 m.
4	10.0 m.
5	10.2 m.
6	10.0 m.
7	10.0 m.

Besides above-listed piers, harbour has private piers with 70 berths capable of mooring vessels of up to 250,000 d.w.t.

STEVEDORES: Ordering of labour gangs is by 1600 hours of previous day.

MEDICAL: Contact Agent to arrange medical attention. Agent must present Arrival Notice to Quarantine Station in advance of vessels arrival. Hospital facilities available.

TANKERS:

Berth	*Product*	*Shorelines*	*Discharge Rate t.p.h.*
Keihin Kawasaki Sea Berth	Crude Oil	20 in.x2	9,000
Toa Nenryo Ohgishima Sea Berth	Crude Oil	16 in.×4	18,000
Toa Nenryo Pier	Fuel Oil	12 in.×2	2,000
Toa Nenryo Ukishima Sea Berth	Crude Oil	12 in.×3	6,000
Toa Oil No. 3 Factory	Fuel Oil	10 in.×3	1,000
Toa Oil No. 1 Pier	Crude Oil	10 in.×2	2,000
General Sekiyu Seisei	Crude/Fuel	12 in.×2	3,800
Mitsubishi Oil	Crude Oil	12 in.×2	4,500
	Fuel Oil	8 in.×1	1,200
Mitsubishi Shoji	Crude Oil	8 in.×2	1,200
	Fuel Oil	8 in.×2	850
Nissho Iwai	Fuel Oil (C)	10 in.×1	1,500
	Fuel Oil (A)	8 in.×1	1,000
Idemitsu Oil	Lub. Oil	6 in.×1	250
		8 in.×1	400
Showa Oil	Fuel	8 in.×2	500

TIDAL CURRENT: The littoral current running Westward along reclaimed industrial area of city is very slow and has rate of about 0.3 m. around the head of municipal wharf when tide is on the ebb.

FRESH WATER: Supplied at piers. Water supplied by water barge, overtime, Sundays and legal holidays.

Item	*Available at*	*Number of Hydrants*	*Capacity t.p.h.*
Pier	Nissin Seifun K.K.	1	25
	Hitachi Zosen K.K.	7	140
	Toyo Wharf Co. Ltd.	9	180
	Nippon Kokan K.K. Ogimachi	11	330
	Nippon Kokan K.K. Ogijima	2	20
	Bridgestone Gas Co. Ltd.	2	40
	Nippon Kokan K.K. Oshima	9	270
	Mitsui Wharf Co. Ltd.	9	180
	Idemitsu Kosan Co. Ltd.	1	30
	Municipal Berth	37	1,850
	General Oil Co. Ltd.	1	40
	Nippon Oil Gas Co. Ltd.	1	50

	Barge	*Loading Capacity (ton)*	*Remarks*
Water Barge	Hoei Maru No. 12 Kosho Maru	280 300	Operated by Water Bureau of Kawasaki City

DEVELOPMENTS: Plans for commercial wharf at Ohgishima. Ohgishima East Island will be reclaimed and wharf constructed with 20 berths for 15,000-ton vessels for international trade and 11 berths for 5,000-ton vessels for domestic trade.

GANGWAY/DECK WATCHMEN: Watchmen not necessary and not recommended.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

FUEL: All grades available.

CERTIFICATES: See "Yokohama".

CUSTOMS ALLOWANCES: Tobacco, 200 cigarettes, Wines/spirits, 1 bottle per person.

IDENTITY CARDS: Needed to get shore-pass.

CONSULS: See "Yokohama."

REPAIRS: All repairs possible.

DRY DOCKS: Hitachi Dockyard.

Dock Number	*Length*	*Breadth*	*Depth*	*Capacity*
No. 1	164 m.	22 m.	6 m.	7,000 g.t.
No. 2	220 m.	30 m.	10 m.	25,000 g.t.

AIRPORT: Distance from airport (Narita International Airport) 230 km. Airport served by regular airlines.

TIME: Akashi standard time 135° GMT plus 9 hours. Permanent.

HOLIDAYS: National holidays, Sundays. National holidays January 1, 2, 3, 15; February 11; March 21; April 29; May 3, 5; September 15, 23; October 10; November 3, 23; December 28, 29, 30, 31. Cargo work cannot be arranged on following days: December 31st; January 1st, 2nd, 3rd.

POLICE/FIRE/AMBULANCE: Police Kawasaki 26–9161; Ambulance Kawasaki 28–0963; Fire Kawasaki 28–5521.

TELEPHONES: Connection to ship. Charge for use.

SERVICES: Tank-cleaning. Compass adjusting. Direction Finder calibration.

SHORE LEAVE: Crew members allowed ashore after being issued with shore passes.

DELAYS: Awaiting favourable tide. Delay of Quarantine inspection.

SHIPMASTER'S REPORT: *The Tonen Ohgishima Sea Berth:*

1. Suggest Mikimoto Lighthouse used for end of passage as from there inwards to Uraga Channel (58 miles) heavy concentrations of traffic frequently experienced.

2. Entry to Uraga Channel for VLCCs permitted only during daylight (i.e. sunrise to sunset).

3. Pilot boards in vicinity Uraga No. 1 buoy from 1 of the 2 tugs which escort the vessel to Yokohama/ Kawasaki and requires fire fighting tug standing by at Uraga Buoys Nos. 1–6.

4. Deep draft signal to be displayed including the red flashing light and Code "First Substitute over Flag 'B' " and 2 black cylindrical shapes (0.6 m. × 1.2 m.) placed vertically (refer Maritime Traffic Safety Law).

5. ETAs (No. 1 Buoy Uraga) should be updated as promptly as possible. Considerable importance attached to the vessel's arrival/sailing time by Tokyo Wan Traffic Advisory Service Centre (TWTASC).

6. Vessel must anchor at Kawasaki Anchorage where Port Health boards (pilot hoist used).

7. Berthing/Unberthing Ohgishima Sea – berth during daylight only (sunrise to sunset).

8. Berthing pilots (2) embark at Quarantine Anchorage, 6 tugs all using nylon tow ropes with eye on bitts. Always port side alongside. Refer mooring diagram for details. No additional mooring ropes available on loan or hire from berth. Shore gangway, Chiksan arms 4×16 in. connections.

9. A spill boom completely surrounds the vessel on the berth. A comprehensive book (in English) of the Terminal Regulations placed on board on arrival. Tonen Company require a tape recording concerning oil pollution to be broadcast throughout the vessel's p/a system before cargo discharge commences.

10. Ullaging is witnessed by Oil Co. representative. Samples taken from all tanks necessitating the opening of tank hatches. All tanks dipped after discharging completed.

11. The loading of stores, provisions, etc. (either by crane or derrick) is not permitted on this berth. No restrictions on items being *carried* on board via the gangway, e.g. laundry. Necessary to anchor after discharging/ballasting to take on stores.

12. During severe weather conditions tug assistance was requested to stand by the vessel on the berth. Tugs cannot approach unless the spill boom is removed and this will only be removed if cargo discharge ceases and Chiksan arms disconnected.

13. A shore liberty boat was arranged through Agent. This service is to Yokohama, approx. 1 hour journey. A boat service to nearby Kawasaki is permitted and take 40 minutes. All boat services suspended when weather deteriorates. Shore passes issued by Immigration Authorities on board and must be collected in before vessel leaves berth.

AUTHORITY: Port & Harbour Bureau of Kawasaki Municipality.

AGENTS: See "Yokohama".

KIIRE: 31.23 N. 130.32 E. (See Plan Book)

DOCUMENTS:

Ship's Register.
Last Port Clearance.
5 Crew Lists including Passport Nos.
5 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: No particular regulations for navigating in Kagoshima Bay. Suggest enter Bay on course close to Osumi Peninsula. 3 Light Beacons South of oil piers for Ships approaching and manoeuvring. Bay pilots not provided but Mooring Master provided for assistance to Master for berthing without charge. No VHF available for ship-shore communication.

ANCHORAGES: Anchorage area ranges in depth from 30 to 60 m. Holding ground in these areas only fair; recommended vessels lie to long scope of chain. Locally tide rise approximately 3 m. in springs and 1.5 m. neaps. Maximum tide currents Northerly 0.32 knot, Southerly 0.47 knot. Ample anchorage and manoeuvring area N.E. of terminal.

RESTRICTIONS: Night entry and departure permitted subject to weather conditions. However, Harbour Master will not permit vessels loaded with oil cargoes to berth between sunset and sunrise.

MAX. SIZE: Max. draft at Nos. 1 and 2 berths – 18 m. acceptable 30,000–150,000 d.w.t. vessels. Max. draft at No. 3 berth – 28 m. acceptable 30,000–450,000 d.w.t. vessels. Max. safe draft at No. 4 berth 34 m. suitable for up to 700,000 d.w.t. Also see "Tankers".

HEALTH: Radio pratique available. Quarantine officers board the vessel either at the quarantine anchorage or at the pier, depending on availability of berth.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically West bound vessel to Choshi and North bound to Nagasaki Radio respectively.

TUGS: Mooring and unmooring assistance provided by two 4,200 h.p. CPP tugs and two 3,000 h.p. VSP tugs regularly stationed.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

MEDICAL: Advance notice required if arriving at weekend.

TANKERS:

Berth No.	Max. LOA	Connections	Discharge Rate
1	310 m.	5×12 in.	10,000 k/l (loading only)
2	310 m.	5×12 in.	10,000 k/l
3	350 m.	6×16 in.	20,000 k/l
4	400 m.	2×16 in.	5,000 k/l
		3×24 in.	10,000 k/l

DENSITY: 1025.

FRESH WATER: Water obtainable at berth on oil piers at rate of 40 tons per hour.

FUEL: Domestic oil is available from Kagoshima and bonded oil will be lightered from Moji area, when required.

FIRE PRECAUTIONS: Very strict Safety Regulations.

Disregard of regulations will result in stopping all loading or unloading operations and the vessel being ordered off berth for appropriate action to be taken.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Available Moji, Sasebo & Nagasaki.

DRY DOCKS: None.

REPATRIATION: Possible.

AIRPORT: Distance from airport about 2 hours by car. ANA and Towa airlines serve daily.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police station tel. 110; Fire brigade station is located at terminal and Ambulance available at that station.

TELEPHONE: Telephone placed on board at Terminal free of charge for inter-office communication.

SERVICES: All services available.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Nippon Oil Staging Terminal Co., Ltd.

AGENT: Sub-agents of Dodwell & Co. Ltd., Tokyo. Tokyo Tanker Marine Service Co. Ltd. 2856-5, Uenohama Aza Nakamyo Kiire-cho, Ibusuki-gun Kagoshima-ken. Cable Address: Tokmarine Ibusuki Domestic Telex: 7867-22 Tel.: (09934) 5-0171.

KIKUMA: 34.03 N. 132.51 E. (See Plan Book)

LOCATION: Sea Berth: 34° 03′ 34.2″ N., 132° 51′ 52″ E. Dolphin Berth: 34° 03′ 0.8″ N., 132° 51′ 21″ E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Inland Sea Pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to Pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from 1 of 3 Pilot-stations dependent upon vessel's last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot-stations. Also see "Shipmaster's Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits) Position 34° 38′ N. 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse. (Vessels transitting Bungo Channel). Position 33° 13′ N. 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot-station.

3. Mesaki, at East side of Kanmon (Shimonoseki) Straits. Position 33° 56′ 24″ N., 131° 03′ 12″ E.

ANCHORAGE: Lat. 34° 03′ N. Long. 132° 51′ E. Depth of water: 15–30 m. Anchorage located about 350 m. off beach. Holding ground good and Port faces Iyo-Nada and located Bungo channel. Current at berth and off shore very strong. During Winter months strong N.W. wind prevails.

RESTRICTIONS: Mooring and unmooring daytime only and to be carried out on flood tide.

MAX. SIZE: See "Tankers".

HEALTH: Closed port. Vessels should obtain pratique at Matsuyama. If Kikuma is first port of call in Japan, customs formalities will be carried out by Imabari Branch Customs Kikuma Port Guard Office.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically West bound vessel to Choshi and North bound to Nagasaki Radio respectively.

TUGS: Join vessel at sea anchorage, always using tugs line without charge. 2 to 4 tugs are required for berthing, depending on size of vessel. 3 tugs are normally used for unberthing.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

MEDICAL: No advance notice required unless urgent.

TANKERS: *Taiyo Oil Co. Terminal.* 2 tanker berths available.

Berth	*Max. d.w.t.*	*Max. LOA (m.)*	*Max. Safe Draft (m.)*	*Type Cargo & diameter/Number of shore pipes*	*Discharge rate t.p.h.*
Sea-Berth	125,000	280	20	Fuel oil 28 in.×1(12×2)	4,500
				Crude oil 28 in.×1(12×2)	4,500
Dolphin Berth	88,450	237	16	Fuel oil 24 in.×1(12×2)	4,500
				Crude oil 24 in.×1(12×2)	4,500
				Naphtha 12 in.×1	1,000

DENSITY: Anchorage 1015. Berth 1015.

FRESH WATER: Fresh water not available but usually brought by barge from Onomichi (about 6 hours run to Kikuma). Rate of delivery 80 tons to 200 t.p.h. dependent on barge.

FUEL: Can only be supplied by barge from Hanshin and Kanmon area, provided 5 days notice is given. All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from nearest bunker stock ports at maximum 7 days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: No consuls. The nearest Consulates in Kobe.

REPAIRS: Only minor repairs.

REPATRIATION: Possible. Nearest Immigration office situated at Matsuyama.

AIRPORT: Nearest Matsuyama and Takamatsu.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police 110; Ambulance 119; Fire 119.

TELEPHONES: No facilities for placing telephones on board.

GENERAL: As this port is a closed port, the undermentioned procedures required: In conformity with regulations vessel required to obtain special permission to enter from Shikoku Maritime Bureau.

Customs request vessel call at Kikuma to obtain special permission for entering at preceding port, by paying the charge at the same rate of tonnage dues.

Prior to arrival of a vessel, the above procedures will be undertaken by Agent.

No quarantine available, the nearest quarantine station is located at Matsuyama.

No Immigration office at this port (coming from Matsuyama).

SERVICES: See "Kobe".

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AGENTS: See "Niihama".

KIMITSU (Kisarazu): 35.22 N. 139.52 E.

(See Plan Book)

DOCUMENTS: Arrival

Quarantine service:

Maritime Declaration of Health – WHO form, 1 copy.
Crew List – free form, 1 copy.
Passenger List (if any) – free form, 1 copy.
Vaccination Certificate (smallpox & cholera), presentation.
Derating (Exemption) Certificate, presentation.
List of valid terms of Crew's Vaccination Certificate, presentation.

Immigration service:

Crew List – free form, 1 copy.
Passenger List (if any), – free form, 1 copy.
Seamen's Ledger, presentation.
Passport or Seamen's Book (all of them), presentation.

Customs Inspection:

Ship's Register, presentation.
Last Port Clearance, presentation.
Crew List – free form, 1 or 2 copies.
Passenger List (if any) – free form, 1 copy.
Store List (Japanese Customs form required).
Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan.)
List of ports of call including last foreign port.

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: *Berthing Pilot:* Will become compulsory as of January 1st, 1979 for foreign trade vessels over 10,000 gross tonnage. Application to be made to Yokohama pilot office, via local Agent. Pilot boards on Kisarazu Quarantine station or entrance of approaching passage. Available during daytime only.

Bay Pilot . . . . Uraga & Nakano-SE on entering: Bay Pilot became compulsory in January 1977 for foreign trade vessels over 10,000 gross tonnage. Application required 24 hours prior to entering by Cable to Anjin Yokosuku through Agent or direct. Pilot boarding position located on point 5.0 miles and 161° from Kannon Saki L.H. Available any time, if any notice delay, change must be cabled to Anjin Yokosuka.

On leaving: Application same as On Entering. Pilot boarding on pier or off harbour.

ANCHORAGE: Refer to Japanese Chart No. 1062 (middle part of Tokyo Bay). Kisarazu Quarantine Anchorage boundary:

Point A, 35° 24′ 6″ N. 139° 49′ 30″ E.
Point B, 85° 3,500 m. direction from A.
Point C, 355° 1,500 m. direction from B.
Point D, 265° 3,500 m. direction from C.
Position usually used: 35° 24.5′ N. 139° 50.5′ E.

HEALTH: At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port. A vessel may be berthed without a stay at the anchorage if Radio Pratique system used and permission of Chief of Quarantine Office.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

VHF: Port Radio Station at Yokohama works 24 hours. Channel 16.

TUGS:
6 tug boats belonging to Kimitsu tug boat station.

3,500 h.p.–4,000 h.p.	3 tugs
2,900 h.p.–3,500 h.p.	3 tugs
2,200 h.p.	1 tug

Another 16 tug boats listed belonging to Yokohama tug boat station.

3,500 h.p.–4,000 h.p.	2 tugs
3,000 h.p.–3,500 h.p.	4 tugs
2,500 h.p.–3,000 h.p.	2 tugs
2,000 h.p.–2,500 h.p.	8 tugs

Tug boat's lines used free of charge.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by VHF.

Centre Pier:

No. 1 – 4 Coastal chemical tanker, tug boat basin.
No. 5 Coastal Raw material discharging berth.
No. 6 Discharging berth of iron ore and coal. Max. draft 16.3 m. at high tide. Length of berth 304 m. Capable of 150,000 d.w.t.
No. 7 Discharging berth of iron ore and coal. Max. draft 18 m. at high tide. Length of berth 350 m. Capable for 200,000 d.w.t.
No. 8 Discharging berth of iron ore and coal. Max. draft 18 m. at high tide. Length of berth 422 m. Capable for 270,000 d.w.t.
No. 10 Coastal Limestone carrier berth.
No. 11, 12 Coastal tanker berth.

Centre pier unloader at No. 6 & 7 – 4 units each capacity 1500 t.p.h.
Centre pier unloader at No. 8 – unit capacity 2,500 t.p.h.

West Pier:

No. 1 – 6 Coastal small ships only.
No. 7 Loading berth of steel products. Max. draft 11 m. Length of berth 250 m. Capable for 30,000 d.w.t. Shore crane 1 unit 20 tons 1 unit 30 tons.
No. 8 Loading berth of steel products. Max. draft 11 m. Length of berth 250 m. Capable for 30,000 d.w.t. Shore crane 1 unit 30 tons 1 unit 20 tons.
No. 9 Loading berth of steel products. Max. draft 11 m. Length of berth 285 m. Capable for 30,000 d.w.t. Shore crane 1 unit 30 tons 1 unit 35 tons.
No. 10 Loading berth of steel products. Length of berth 230 m. Max. draft 11 m. Capable for 40,000 d.w.t. Shore crane 2 units each 30 tons.

East Pier:

No. 2 Loading berth of steel pipes. Max. draft 11 m. Length of berth 240 m. Capable of 30,000 d.w.t. Shore crane 3 units on No. 2 & No. 3 berth 30 ton.
No. 3 Loading berth of steel pipes. Max. draft 11 m. Length of berth 240 m. Capable for 30,000 d.w.t.
No. 4 – 13 Coastal ship use only for loading wire rod, angle bar, etc. and discharging materials.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost.

Average loading rates:	Coils 75 t.p.h.
	Plates 50–60 t.p.h.
	Pipes 40 t.p.h.
	Angle 40 t.p.h.
	Wire rods 15–25 t.p.h.
Average discharging rates:	Coal 700 t.p.h.
	Iron ore 750–800 t.p.h.
	1,500–1,600 t.p.h.
	(2,500 ton unloader)
	Manganese ore 600 t.p.h.
	Iron sand 900 t.p.h.
	Coke 700 t.p.h.

MEDICAL: No advance notice required unless urgent.

TANKERS: Only coastal tankers.

DENSITY: 1021-1025

FRESH WATER: Available from shore line. Rate of delivery 40-50 t.p.h.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at max. 7 days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches except steel hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CARGO GEAR: Usually load/unload by shore cranes.

CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 60 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Minor repairs only.

DRYDOCKS: None.

SURVEYORS: Nippon K.K.K., Kimitsu Branch.

REPATRIATION: Possible.

AIRPORT: Narita (Tokyo) International Airport is about 3 hours distant.

TIME: GMT plus 9 hours. No alterations made to clocks during year.

HOLIDAYS: No cargo loaded on January 1st. Cargo discharged on all holidays.

POLICE/AMBULANCE/FIRE: Kisarazu Police Station tel. 0438–23–4011; Kisarazu Fire Brigade and Fire Station tel. 0438–23–7121.

TELEPHONES: No telephones installation direct to vessels alongside wharf.

SERVICES: Provisions, Laundry, Ships store, Garbage, Hold cleaning, Navigation aids. Special service are called from Yokohama and Tokyo.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

GENERAL: Notification to Maritime Safety Agency:

According to Maritime Traffic Safety Law, The Master of large vessel (over 200 m. in LOA and 10,000 gross tons) is required to give to Regional Maritime Safety Agency an advance report of estimated time passing the traffic route and other matters and also requires to obey the instruction given by the Agencies.

Notification cable definitely to be given by 1200 hrs. (JST) on the day prior to entering, directly from Master or through local Agent. Any change in reported matters, to be reported 3 hours before the time of entering by radio communication or telephone.

Seaweed cultivation to be carried out in the vicinity of Nippon Steel Corporation Kimitsu Works so Master's co-operation with regards to the following items would be appreciated.

1. The discharge of oil or oily waste into the water is strictly prohibited by Marine Pollution Law and other related ordinance.
2. Proceeding to the cultivation area is prohibited.
3. Numerous buoys each exhibiting flashing yellow light have been established to mark the outer side-line of the seaweed cultivation area.
4. Bunkering possible daytime only (sunrise to 1 hour before sunset) in the port of Kimitsu.

AGENT: Sub-agents of Dodwell & Co. Ltd. Toyko. Chiba Kaiun Sangyo Co. Ltd., Kimitsu Office, c/o Kaiun Centre Kimitsu Works of Nippon Steel Corporation, No. 1, Kimitsu, Kimitsu-shi, Chiba-ken. Tel. Kimitsu (04395) 2-0800. Telegraphic "Chibamarine Kisarazu".

KINUURA: 34.50 N. 136.56 E. (See Plan Book)

DOCUMENTS:

- Ship's Register.
- Last Port Clearance.
- 3 Crew Lists including Passport Nos.
- 3 Passenger Lists.
- 1 Store List.
- 1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: When Pilot required, cable Agent at least 1 day before arrival with ETA. Pilot station located 34° 40′ N. 136° 58′ E. If ETA changes cable "Handakoun Handa Aichi" who pass messages to Pilot. Vessels anchor to await Pilot at above position. No VHF communication available. Pilot boats have no communication system.

ANCHORAGE: Kinuura anchorage located 34° 49′ N. 136° 57′ E. Depth of anchorage: Outside high tide bank about 38-39 ft., inside high tide bank about 32-33 ft.

RESTRICTIONS: Entry restricted only by draft; no other restrictions.

Channel Depths:

Channel	*Depth (m.)*
Entrance channel	9.0–12.0
Taketoyo channel	4.5
Sekitan channel	7.5 (Access to Wharf 10.0 m.)
Nishifuto channel	5.5
Handa channel	3.5
Shinkawa channel	4.5
Takahawa channel	4.5
Minami channel	4.0

MAX. SIZE: Depth at Chubu Nihon Grain Centre, 12 m. At other berths, 10 m.

HEALTH: At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically West bound vessel, to Choshi and North bound to Nagasaki Radio respectively.

TUGS: No tug required when vessels enter anchorage, only alongside wharves.

Pilot Boats – "Yahagi Maru" 1,600 h.p., "Shiomi Maru" 1,300 h.p. Tugs standby near wharves.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

	Length (m.)	*Depth (m.)*	*Capacity (d.w.t.)*	*No. Berths*
Takatoyo (Private)	350	13.0	40,000	1
,,	184	7.5	5,000	1
,,	218	5.5	2,000	4
,,	116	11.5	15,000	1
,,	50	5.5	1,000	1
,,	250	6.0	3,000	2
,,	500	6.0	3,000	4
,,	250	12.0	40,000	1
,, (Public)	180	4.5	700	3
,,	255	7.5	5,000	2
Handa (Public)	360	5.5	2,000	4
,,	520	7.5	5,000	4
,,	185	10.0	15,000	1
,,	185	10.0	15,000	1
,,	—	10.0	10,000	1
Takahawa (Public)	180	4.5	700	3
,,	150	10.0	15,000	1
,,	21	5.0	1,000	1
Hekinan (Public)	630	5.5	2,000	7
,,	130	7.5	5,000	1
,,	185	10.0	15,000	1
,,	300	6.5	2,000	3
,,	195.2	12.0	40,000	1
,,	162	12.0	40,000	1
,,	120	5.5	2,000	2
,,	150	10.0	15,000	1
,,	70	5.5	2,000	1
,,	52	8.0	6,000	1
,,	100	4.5	700	2

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gears not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

DENSITY: About 1023–1027.

FRESH WATER: Available, but only 1 water barge – capacity 50 tons. When vessels alongside Public Wharves, water can be taken from shore. Delivery rate: 50 t.p.h. but if more than 50 tons required barge returns to shore to load, therefore 1 trip takes about 3 hours.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.
CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.
CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.
CONSULS: None.
REPAIRS: None.
AIRPORT: None.
TIME: GMT plus 9 hrs. No alterations made to clocks during year.
HOLIDAYS: 20th July.
POLICE/AMBULANCE/FIRE: Police 110; Ambulance/Fire 109.
TELEPHONES: No telephones available to place on board.
SERVICES: None.
SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.
AUTHORITY: Kinuura Port Office.

AGENT: Dodwell & Co., c/o Handa Koun Kabushiki Kaisha 28, Hama-cho, Handa, Aichi-ken. Cable Address: Handakoun Handa Domestic Telex: 4563-626 H Koun J Tel.: Handa (0569) 21-2301.

KIN WAN (Okinawa): 26.22 N. 127.58 E.

(See Plan Book)

Kin Wan Port Services Company, Heianza Island.
DOCUMENTS:
Ship's Register.
Last Port Clearance.
3 Crew Lists, including Passport Nos.
3 Passenger Lists.
1 Stores List.
1 Declaration of crew baggage, i.e. tobacco, wines/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest, Cargo Manifest in Transit using specific forms. Therefore ship's Agents should be provided with necessary information about details of cargoes in advance.
APPROACHES: For those vessels which may not be provided with a large-scale chart the following suggestions are given as a guide to approaching the pilot station:

Vessels should make for the position 26° 26′ N., 128° 04′ E. (off the East coast of Okinawa) and from there should steer due West, passing No. 1 Buoy (fl. 4 sec., Ra. Refl.) abeam to port, distant about 1.25 miles. The Berthing Master will board VLCC's (150,000 d.w.t. plus) or any vessel which is a stranger to the port, when they are abeam of the buoy, but if circumstances should prevent this the vessel should continue on the Westerly course for a mile past the buoy and then alter course to 233 (T). About 3.25 miles on this new course brings the vessel approximately to the inner pilot station in 26° 24′ N., 127° 58′ E.

For the purpose of Traffic Separation and Control, the approach to Kin Wan Port is divided by a centre line joining the following positions:
1. 26° 26′ 00″ N., 128° 02′ 00″ E.
2. 26° 25′ 20″ N., 128° 00′ 00″ E.
3. 26° 23′ 30″ N., 127° 58′ 00″ E.

Vessels entering or leaving the port should keep to their own starboard side of this line.
PILOTAGE: Also see "Approaches".

Berthing Masters will normally board from a tug having a blue hull and cream upperworks, with a tall lattice mast bearing a number (1, 2, 3 or 4). Since the tugs have a fairly high freeboard, pilot ladders should be rigged with the bottom step about 6 ft. (2 m.) above the water-level, otherwise the lower steps may be crushed or damaged. Vessels with a freeboard exceeding 30 ft. are requested to rig the pilot ladder in conjunction with an accommodation ladder in the approved manner.

Masters of calling vessels are reminded of their obligation to comply with statutory rules and are requested to comply with International recommendations concerning pilot ladders. If the ladder is not safe, the Berthing Master may refuse to board and thus cause unnecessary delay to the ship.
ANCHORAGES: Recommended anchorages:
For mammoths in order of arrival:
M1: Lat. 26° 24′ 09″ N. Long. 127° 57′ 41″ E.
M2: Lat. 26° 24′ 49″ N. Long. 127° 58′ 15″ E.
M3: Lat. 26° 25′ 29″ N. Long. 127° 58′ 40″ E.
M4: Lat. 26° 26′ 08″ N. Long. 127° 59′ 05″ E.
(Subject Japanese Coastguard M.S.A. approval is obtained by Agent.)
For vessels 50,000 d.w.t.–150,000 d.w.t.
S1: Lat. 26° 23′ 38″ N. Long. 127° 57′ 29″ E.
S2: Lat. 26° 23′ 14″ N. Long. 127° 57′ 14″ E.
S3: Lat. 26° 22′ 50″ N. Long. 127° 56′ 59″ E.
Products anchorage: The area bounded by a line joining the following positions:
1. 26° 22′ 00″ N. 127° 56′ 29″ E.
2. 26° 22′ 13″ N. 127° 56′ 33″ E.
3. 26° 22′ 00″ N. 127° 57′ 19″ E.
4. 26° 21′ 51″ N. 127° 57′ 05″ E.

The holding ground is good in anchorages, but depths in the first groups between 22 and 25 fathoms; it is therefore recommended that at least 1 shackle of chain be walked back on the windlass before letting go the anchor.

Depths in the product anchorage vary between 10 and 14 fathoms.

Prohibited Anchorage: Owing to the existence of underwater pipe-lines, telephone cables and obstructions, anchoring is prohibited anywhere S.E. of a line joining the following 2 positions:
1. 26° 22′ 31″ N., 127° 58′ 08″ E. (i.e. the N.E. dolphin of the Sea Island)
2. 26° 21′ 37″ N., 127° 56′ 44″ E. (i.e. the N.E. dolphin of No. 3 berth on the Products Pier)

For berthing, Masters of vessels are requested to have the propeller submerged and vessel in a reasonable trim for ship-handling purposes (not exceeding 3.5 m.).
RESTRICTIONS: Berthing and sailing operations take place 24 hours a day with the exception that vessels do not berth on Nos. 4 and 5 between sunset and sunrise. However, the island of Okinawa recently reverted to Japanese control and it is possible that movements after sunset may be restricted in the future, especially if the anticipated increase in traffic takes place.

There are no specific restrictions on draft, but in order to ensure safe handling characteristics it is recommended that vessels arriving in ballast arrange that the propeller is fully submerged, with a stern trim not exceeding about 10 ft. Vessels which do not meet this requirement may be delayed in berthing until additional ballast has been run in.
MAX. SIZE: 5 berths are available for calling tankers. No. 1 berth can accommodate vessels up to 500,000 d.w.t., and No. 2 berth vessels up to 150,000 d.w.t. These 2 berths are situated at the offshore platform. Berths No. 3, No. 4, No. 5 are situated at the product dock. (Also see "Berthing").

Berth No.	*Max. d.w.t.*	*Least depth of water below datum*	*Remarks*
Sea Berth 1	500,000	102 ft.	
,, ,, 2	150,000	90 ft.	
Prod. Pier 3	60,000	50 ft.	Max. dist. stern to
,, ,, 4	20,000	36 ft.	manifold 320 ft.
,, ,, 5	10,000	30 ft.	

In addition to the above tanker berths a dry-cargo berth is also available. This berth is 110 m. in length and has a least depth of 22 ft. below Okinawa Datum.
HEALTH: At first port of call in Japan, vessel may obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset, and Captain to show all Vaccination Cards and Derating Exemption Certificate. In case vessel arrives from cholera-infected zone within 10 days, Captain must advise crew and passengers' health condition to Quarantine Officer through ship's Agent prior to arrival, and close all soil pipes before entering port.

No person other than port health and customs officer is allowed to board or disembark from a vessel until clearance has been obtained from Government Authorities.

Radio pratique is available to vessels in possession of valid certificates issued by the Japanese Government. For radio pratique procedures Owners are advised to consult with their Agents for details.
RADIO: When on route to the Kin Wan Port at Okinawa a vessel's ETA must be communicated to his Agent, 72, 48 and 24 hours prior to arrival. If VHF is not available arrival information can also be passed to your Agent by "Ship Telephone Service". Naha: 098854–5155.

It is important that ETA's are confirmed 12 hours before expected arrivals and amendments communicated when known.

VHF station "Kin Wan Tug" located on Heianza Island keeps a 24 hour listening watch on Channel 16 (156.800 mc/s) and Channel 13 (156.650 mc/s). Tel. 098967-8131 is also manned 24 hours per day.
RADAR: The port is not equipped with radar. Poor visibility may occur in heavy rain, but fog is rare. Coastlines and buoys within the bay give good echo returns on ship's radar. All tugs are fitted with radar, and on occasions vessels have been guided into the port by them in heavy rainstorms, the tug keeping close alongside within sight of the bridge, and communicating by VHF.
TUGS: 4 tugboats are stationed at the Terminal. The Berthing Master in consultation with the Master will decide the number of tugs required for each berthing operation and as stand-by tugs during the vessel's stay in port.

Vessels are berthed with the assistance of up to 4 tugs according to the vessel's size and weather conditions. Such tugs will either secure alongside, "American style", or will secure forward or aft by their towing hooks. Tugs' lines are always used. The tugs are of 2,400 h.p. and have twin C.P. propellers with independent Kort-nozzle rudders, and are manned by highly skilled crews. It should be noted that the port charges for vessels are a fixed amount based on deadweight tonnage, and this charge is not affected by the number of tugs used or not used. Masters may thus follow the Berthing Master's recommendations regarding tug requirements without having to consider what may well be dangerous economies.
READINESS: A vessel is "arrived" for notice of readiness purposes, when the Berthing Master boards or, if vessel proceeds to anchorage without a Berthing Master, when she drops her anchor.
BERTHING: In normal circumstances no lines are run out until the vessel is alongside the berth and in position. Tugs will hold her there whilst the mooring takes place, springs usually being run first, followed by breastlines, then head-and stern-lines. On the larger

berths all lines except springs are lowered to the water and taken to the dolphins by line-handling boats, where they are secured to quick-release hooks. Nothing is required in the way of pennants, tails or shackles. Springs are passed direct to the dolphins by heaving-lines.

Owing to the depth of water, anchors are not normally used when berthing at the sea-berth. However, the outboard anchor should in all cases be ready for emergency use.

Weather permitting, vessels secure starboard side alongside at No. 3 Berth. At Nos. 4 and 5 vessels can only berth starboard side to the pier, owing to the construction of the berths. Therefore if wind conditions do not permit of berthing in this way, the berthing will be delayed until the wind is suitable. At the sea-berth, mammoth vessels normally berth port side to the pier, but this is only to reduce the time taken for the operation, and they can be berthed starboard side to if conditions require it. Smaller vessels are berthed either way according to requirements and conditions.

The Marine Office is equipped with a Weather Facsimile Recorder, and Masters can obtain the latest information regarding possible storm conditions by contacting the Harbour Master on VHF Channel 14 or by calling 214 on the internal telephone system from the berths. When typhoons are imminent all cargo operations cease and vessels are required to vacate the berths and are recommended to proceed to sea.

Berth No. 1

Owners: Okinawa Terminal Company Ltd.

Position: 26° 22′ 25″ N., 127° 58′ 01″ E.

Depth: 30 m. (MLWS).

Max. Size: 385 m. LOA, 55 m. beam, 28 m. draft. 500,000 d.w.t.

Services: Fuel oil (bunkers), loading rate 2,800 kl/h, chicksan used. Fresh water available.

Loading Rates: Bunkers/HFO 3,000 kl/h, product 2,000 kl/h. All other products 4,000 kl/h. Max. pressure 250 p.s.i.

Berth No. 2

Owners: Okinawa Terminal Company Ltd.

Position: 26° 22′ 25″ N., 127° 58′ 01″ E.

Depth: 30 m. (MLWS).

Max. Size: 315 m. LOA, 45 m. beam, 20 m. draft.

Services: See Berth No. 1.

Loading Rates: See Berth No. 1.

Berth No. 3

Owners: Okinawa Sekiyu Seisei K.K.

Position: 26° 21′ 34″ N., 127° 56′ 40″ E.

Depth: 15.5 m. (MLWS).

Max. Size: 240 m. LOA, 35 m. beam, 13.5 m. draft.

Services: Fuel oil (bunkers) available, 70 kl/h. 6 in. hoses used. Fresh water available.

Loading Rates: Aviation, JP4 and Naphtha, 500 kl/h × 2 low sulphur FO 1,000 kl/h × 3. Fuel oil and diesel 1,000 kl/h. Max. pressure 15 kg/sq. cm.

Vessels normally berth starboard side to.

Berth No. 4

Owners: Okinawa Sekiyu Seisei K.K.

Position: 26° 21′ 29″ N., 127° 56′ 48″ E.

Depth: 11.5 m. (MLWS).

Max. Size: 175 m. LOA, 22 m. beam, 10 m. draft limiting condition 90 m. stern to manifold.

Services: Fuel oil available, rate 70 kl/h. Chicksan used. Fresh water available.

Loading Rates: Aviation, JP4, JP1, kerosene 500 kl/h × 2. Low sulphur F.O. 600 kl/h. diesel 1,000 kl/h, fuel oil "A" 1,000 kl/h. Maximum pressure 15 kg/sq. cm.

Vessels berth starboard side to.

Berth No. 5

Owners: Okinawa Sekiyu Seisei K.K.

Position: 26° 21′ 28″ N., 127° 56′ 58″ E.

Depth: 10 m. (MLWS).

Max. Size: 110 m. LOA, 17 m. beam, 8.5 m. draft limiting condition 10,000 d.w.t.

Services: Fuel oil, 6 in. hose, 70 kl/h diesel, 6 in. hose, 700 kl/h.

Loading Rates: JP4, JP1, kerosene, diesel and fuel oil "A" 700 kl/h. Max. pressure 20 kg/sq. cm. sulphur, 120 kl/h, max. pressure 15 kg/sq. cm. low sulphur fuel, 600 kl/h max. pressure 20 kg/sq. cm. LPG 200 kl/h max. pressure 27 kg/sq. cm.

Vessels berth port side to.

LOADING: Loading lines at the berths are as follows: (*Note:* Hoses are listed from N.E. to S.W.)

Berth No.	*Dia. (in.)*	*To handle*	*Type*
1	12	Bunker/HFO	Chicksan arm with Q/C
	16	Products	,, ,,
	16	Crude/HFO	,, ,,
	16	Crude/ballast	,, ,,
	16	Crude/ballast	,, ,,
	16	Crude	,, ,,
	16	Ballast	,, ,,
2	12	Bunker/HFO	,, ,,
	16	Product	,, ,,
	16	Crude/HFO	,, ,,
	16	Crude/ballast	,, ,,
	16	Crude/ballast	,, ,,
	16	Crude	,, ,,
3	4	Bunkers (DO, FO)	Flexible hose
	10	Ballast	Mechanical arm
	10	Naphtha/JP4/kero.	,, ,,
	10	Naphtha/JP4/kero.	,, ,,
	12	Ballast/LSFO	" "
	12	Low sulphur fuel	" "
	12	Low sulphur fuel	" "
	6	Bunkers (DO, FO)	Flexible hose
4	10	Ballast	Mechanical arm
	10	JP4, Jet A1, kero., naph.	" "
	10	JP4, Jet A1, kero., naph.	" "
	10	Automotive or marine diesel	" "
	10	Low Sulphur (FO)	
	6	Bunkers (DO, FO)	Flexible hose
5	6	Auto/marine diesel, kero.	" "
	4	LPG vapour return	" "
	6	LPG/propane/butane	" "
	6	Liquid sulphur	Mechanical arm
	6	Bunkers (FO, DO)	Flexible hose

During cargo transfer or ballast operation all vessels shall show signal flag "B" during the day, and a red light during the night.

Transfer operation shall not be started, or if started shall be discontinued by either the duty officer of the vessel or the Terminal supervisor, when any of the following conditions come to his attention:

(*a*) During severe electrical storms.

(*b*) If a fire occurs on the pier or on the vessel.

(*c*) If there is not sufficient competent personnel aboard the vessel or on the pier to safely handle cargo operation in progress.

(*d*) Should any condition develop which represents a hazard to the vessel or Terminal installation.

MEDICAL: Agents should be given advance notice of medical or dental attention required. Clinic and hospital facilities are available, and in emergencies helicopter evacuation is possible. There is also a Company ambulance on Heianza Island, for emergencies only. Telephone 319. If no answer, or at night, telephone 300. Or contact C.C.D. (Central Control Desk) on VHF Channel 16 or telephone 211.

DENSITY: The bay is open to the sea, and normal density is 1025.

FRESH WATER: Available.

FUEL: Heavy fuel is available at Nos. 1 and 2 Berths. All grades of bunkers are available at Nos. 3, 4 and 5.

CONSULS: At present the only Consulates on Okinawa are those of U.S.A. and Taiwan and Philippines.

REPAIRS: Only minor repair facilities are available in Kin Wan, for such small components as can be sent ashore, e.g. repairing of valves or piping, re-winding of electric motors.

DRY DOCKS: None.

GANGWAY/DECK WATCHMEN: Shore gangways are fitted at Nos. 1, 2 and 3, and are supplied free of charge. Ship's gangways must be provided at Nos. 4 and 5. Watchmen are not required since access to the berths is controlled by the Company's security guards at the installation gates.

REPATRIATION: Crew changes and/or repatriation can be arranged by the Agent.

AIRPORT: Kin Wan Port is about 2 hours by car from Naha airport (depending on traffic conditions) from where there are frequent services by several major airlines to all parts of the world via Tokyo, Honolulu, Taipeh or Hong Kong.

TIME: Local time is 9 hours ahead of GMT, unchanged throughout the year.

HOLIDAYS: Local holidays do not normally affect operations in the port. Bank Holidays are now basically the same as those in other Japanese ports.

POLICE/AMBULANCE/FIRE: Ambulance 319 or 300 after hours or 211 (C.C.D.) or VHF 16; Fire 319 or 300 after hours or 211 (C.C.D.) or VHF 16; Police inform C.C.D. by VHF Ch. 16 or tel. 211, or Harbour Master tel. 214.

TELEPHONES: Telephones are not placed on board, but for urgent ship's business arrangements can be made for calls to be placed through the Company switchboard.

SERVICES: Tank-cleaning alongside is prohibited, but facilities for discharge of tank washings are available. See "Pollution Control".

SHORE LEAVE: For reason of safety the Terminal and the Off-Shore Platform are restricted areas. However, ship's personnel and visitors to ships are permitted to disembark and embark via the dolphins, which are also the personnel landing areas. Loitering at the loading platform will not be permitted.

Unauthorized or apparently intoxicated or disorderly persons shall be prohibited from entering the pier and the Terminal.

Shore passes will be issued by the Agent. These passes must be surrendered to the Agent prior to the ship's departure, unless the vessel is bound for another port in Japan when they can, after stamping, be used in the second port. The pass is sufficient, and no other means of identification need be carried when ashore.

POLLUTION CONTROL: Gas-freeing is not allowed on tankships alongside the pier.

To minimise the chances of pollution *all* ballast, whether clean or dirty, *must* be discharged ashore, except that which is contained in independent "permanent" ballast tanks. Also all ballast loaded into cargo tanks must be taken from ashore, and not from the Bay. The shore ballast tank has a capacity of 550,000 barrels and is connected to all tanker berths.

Caution: The sea berth is surrounded by a new type of sink/float oil fence to contain any oil that may be spilled on the sea. This fence is moored in place by 36 anchors and ropes. Vessels are therefore warned against approaching this fence or using any anchors in the vicinity of the sea berth. Nor should they throw overboard any old wires, ropes or other rubbish which may foul or damage the fence or its moorings.

The Terminal will, in case of an oil spill, take such steps as may be deemed necessary to fight the pollution before it spreads. If the spill is due to faulty equipment or materials on the vessel or to negligency on the part of ship's personnel, the Terminal shall be indemnified for any expenses incurred in connection with the preventive action taken.

No ballast is to be taken from the Bay unless required for the ship's clean permanent ballast system. Ballast for cargo tanks will be supplied by the Terminal.

FIRE PRECAUTIONS: Smoking and use of naked lights is strictly prohibited on board vessels alongside the berths, except in those enclosed spaces aboard ship specifically designated by the Master as "Smoking Areas".

Fire wires of steel must be hanging over the side of the offside bow and quarter whilst alongside to enable tugs to connect readily in an emergency situation. The towing eyes should be maintained at water level.

Boiler tubes must not be blown whilst vessel is alongside and every precaution must be taken to prevent sparks and soot particles escaping from the funnel.

Mooring of boats or craft with mechanical propulsion alongside a vessel loading/discharging crude oil or in the process of ballasting, is not allowed, unless special permission has been given by the Terminal.

In case of a fire aboard a vessel alongside the pier the following sequence of procedure should be adhered to:

(a) "Kin Wan Tug" to be informed immediately.

(b) All cargo operations to cease forthwith.

(c) MOV's and gate valves on loading arms, nitrogen and battery limit valves to be closed as soon as possible.

(d) Dock personnel to stand-by for disconnecting loading arms, unberthing or fire-fighting in accordance with instructions issued by the Berthing Master or "Kin Wan Tug".

During an emergency situation on board a vessel alongside, the Berthing Master will be in charge of organising the preliminary fire-fighting assisted by "Kin Wan Tug". He is to make use of all available means at his disposal, such as tugboats, launches, personnel, terminal equipment and other facilities to assist the vessel and protect lives and Terminal installations. Should the Berthing Master be unavailable or unable to communicate, "Kin Wan Tug" will direct the preliminary fire-fighting.

Kin Bay area comes under the jurisdiction of the 11th District of the Japanese Coastguard and lies in Kin Nakagusuku Port. The telephone number of the Captain of the Port-Coastguard offices, 11th District is 098892-4874.

AUTHORITY: Maritime Safety Agency, 11th Maritime District.

AGENT: Connell Bros. Co. Ltd., PO Box 57, Naha, Okinawa. Tel. 098863-3991/4. Cables: Seabsea, Okinawa. Telex: Connell J. 79822.

KOBE: 34.40 N. 135.12 E. (See Plan Book)

DOCUMENTS:

Ship's Register.

Last Port Clearance.

1 Store List.

1 Declaration of Crew's Baggage.

4 Crew Lists.

4 Passenger Lists (if any).

Ship's Agents will prepare other documents such as Inward/Outward Declaration, Cargo Manifest, etc., using Japanese Custom's Forms.

PILOTAGE: *Tomogashima Channel Pilot (not compulsory):* Pilot boards 5–7 miles South of Tomogashima (approximately 34° 10′ N., 135° 00′ E.). Cable address: "Baypilot Kobe". If Bay pilot is required, please inform them 24 hours prior to vessel's arrival at Tomogashima Pilot Station.

Harbour Pilot: Pilot boards at quarantine anchorage at Wada-Misaki Point. Cable address: "Pilot Kobe". 24 hours prior notice is required. When vessel moors to buoy, chain cable should be prepared.

ANCHORAGES: Quarantine anchorage: Latitude 34° 38′ N; 34° 38.6′ N. Longitude 135° 10′ E; 135° 11′ E.

All vessels requiring anchorage for awaiting berth, repairs, bunkering etc., must obtain anchoring position from Harbour Master.

RESTRICTIONS: Quarantine officials are available during daylight hours. Berthing is not permitted after 2130 hrs.

MAX. SIZE:

Name of Berth	*Max. LOA (m.)*	*Max. Safe Draft (m.)*	*Depth at Berth (m.)*
Showa Sangyo	213	10.35	12.60
Tomen Silo	223	10.35	12.40
Zenno Silo	223	10.35	12.20
Kohnan Silo	245	10.71	12.20
Hanshin Silo	210	10.26	11.60

Also see "Tankers".

HEALTH: Quarantine officials board vessel from daylight to sunset at Quarantine Anchorage.

Radio pratique is available. Vessels must be in possession of a valid Japanese Sanitary Inspection Certificate.

Documents required: Deratting Exemption Certificate, Crew List, Passenger List, Maritime Declaration of Health and Vaccination Cards.

RADIO: Recommend Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically West-bound vessel to Choshi, and North-bound to Nagasaki Radios respectively.

Kobe-Radio details.

	Security and Port message	*Port message*	*Public message*
Call sign	JGD	Kobe Port Radio	JCK
Name of Station	Coast Station or Special Service Station	Kobe Port Radio	Kobe Radio
Station Owner	5th Regional Maritime Safety Headquarters	Kobe Municipality (its Port & Telegraph Harbour Bureau)	Kobe Central Office
Frequency	444 kc/s. 500 kc/s. 500 kc/s. 512 kc/s. International VHF Channels 12, 16	International VHF Channels 16, 12, 11, 18, 20. 24-hour service.	134.9 kc. 143 kc. 416.5 kc. 487.5 kc. 500 kc. 512 kc. 425 kc.

TUGS: Join vessel at entrance of fairway. Tug's lines used without extra charge.

BERTHING: Chains must be used in mooring to a buoy. Ship must not drop anchor near a buoy when it is moored to one. Ship brought head in alongside pier except in special cases. Some berths impossible to reach after sunset. Example: dolphin berths. This is why ships need to arrive outside breakwater before sunset.

See Tables pages 529 and 530.

BULK HANDLING FACILITIES: Hanshin Silo Company Berth, 11.60 m. depth alongside available for vessels up to 50,000 tons d.w.t. Discharge effected by 2 pneumatic unloaders with capacity 400 t.p.h. per unit.

Kobe Silo Berth, length 752 ft., depth alongside 41 ft. 2 mobile discharging units each with capacity of 500 t.p.h.

Kohan Silo Berth, length 214 m., depth alongside 12.2 m. equipped with 2 discharging units which can be used for grain, sugar, or general cargo, also 1 pnuematic unloader, with capacity 1,500 t.p.h. per unit.

In the current development programme a total of 7 container berths are to be provided at Kobe.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores.

MEDICAL: No advance notice required unless urgent. Hospital facilities available.

FIRE PRECAUTIONS: LPG tankers instructed by Maritime Safety Headquarters to strictly observe safety rules. Example: checking on what is carried by those who go aboard; banning ship's stores to be loaded on to ship which is working.

DEVELOPMENTS: Rokko Island is now under construction to the East of Port Island and expected to complete in 1985. The Port Island is to be completed in 1980.

WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: By Stevedores or crew, ship's option.

CERTIFICATES: Ship's Register to show Customs Inspector for registered gross and nett tonnage. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCES: Tobacco (per passenger or crew member). Temporary shore-leave up to 50 cigarettes (duty free); Disembarkation up to 200 cigarettes (duty free). Maximum allowable (only in case of disembarkation) up to 800 cigarettes duty free (however, 600 cigarettes – taxable).

Wines and/or Spirits: Crew member: When the ship at sea for more than 1 month, up to 6 bottles (1 bottle – duty free); less than 1 month up to 6 bottles (no duty free). Passengers: When a passenger travels for less than a fortnight up to 12 bottles (1 bottle – duty free); more than a fortnight up to 12 bottles (up to 3 bottles – duty free).

CONSULS: The following countries are represented by Consuls in Kobe and Osaka area:

Argentina
Australia
Austria
Belgium
Bolivia
Brazil
Central African Rep.
Chad
Chile
Costa Rica
Denmark
El Salvador
Finland
France
Germany
Great Britain
Greece
Guatemala
India
Indonesia
Italy
Ivory Coast
Korea
Malagasy Republic
Malta
Mexico
Netherlands
Norway
Pakistan
Panama
Paraguay
Philippines
Portugal
Singapore
Spain
Sri Lanka
Sweden
Switzerland
Thailand
Turkey
U.S.A.
U.S.S.R.

REPAIRS: All repairs possible.

Wharves and Mooring Dolphins for Large Vessels (Public)
E=East Side; W=West side; S=South side

Name		Length (m.)	Width of Apron (m.)	Fixed Depth of Water (m.)	Fixed Number of Vessels Coming alongside: Gross Tonnage	Fixed Number of Vessels Coming alongside: No. of Berths
Shinko Pier 1	W.	349	12	9.1	8,000	2
	E.	351	7.2–12	9.1	8,000	2
	S.	102	—	9.1	2,000	2
2	W.	351	6.7–12	9.1	8,000	2
	E.	351	6.7–12	9.1	8,000	2
	S.	102	—	9.1	2,000	1
3	W.	343	6.7–12	9.1	10,000	2
	E.	354	6.7–12	10.0–10.9	10,000	2
	S.	102	—	9.1	2,000	1
4	W.	576	12–12.5	10.0–12.0	15,000	3
	E.	644	8.9–13.0	10.0–12.0	20,000	3
5	W.	457	11.0	10.0–12.0	20,000 15,000	1 1
	E.	439	11.0	10.0	15,000	2
	S.	143	—	10.0	5,000	1
6	W.	441	11.0	10.0	15,000	2
	E.	436	11.0	10.0	15,000	2
7	W.	200	6.2	10.0	15,000	1
	F.	200	6.2	10.0	20,000	1
8	W.	400	6.5	10.0	10,000	2
	E.	400	6.5	10.0	10,000	2
Maya Pier 1	W.	588	20	10.0—12.0	20,000 15,000	1 2
	E.	400	20	10.0—12.0	20,000 15,000	1 1
2	W.	400	20	10.0—12.0	20,000 15,000	 1
	E.	400	20	10.0—12.0	20,000 15,000	1 1
	S.	192	10	12.0	15,000	1
3	W.	400	20	10.0—12.0	20,000 15,000	1 1
	E.	400	20	10.0—12.0	20,000 15,000	1 1
	S.	192	10	12.0	15,000	1
4	W.	400	20	10.0—12.0	20,000 15,000	1 1
	E.	580	20	10.0—12.0	20,000 15,000	3
	S.	192	10	12.0	15,000	1
Hyogo Pier 1	W.	436	5.4	7.2—9.0	10,000 5,000	1 2
	E.	623	5.4	7.2	5,000	4
	S.	127	—	7.2—9.0	3,000	1
2	W.	436	5.4	7.2—9.0	10,000 4,000	1 1
	E.	436	5.4	7.2—9.0	10,000 8,000 4,000	1 1 1
	S.	127		9.0	3,000	1
3	W.	250	13	7.5	6,000	2
	S.	150	15	9.0	5,000	1
Naka Pier	W.	632	8	5.5—9.0	2,000–10,000	4
	E.	210	8	9.0	8,000	1
Tohbu Home Trade Wharf	W.	451	15	5.5	2,000	5
	E.	1,156	15	5.5—6.0	2,000 3,000	7 5
	N.	361	15	5.5	2,000	4
Higashi-Kobe Ferry Terminal	No. 1	120	6	5.5	1,000	1
	No. 2	155	6	6.0	3,000	1
	No. 3	195	6	7.5	6,000	1
	No. 4	155	6	6.0	3,000	1
Nada Wharf	South Side					
	(W.)	135	5.4	6.3	2,000	1
	(E.)	510	5.4	4.5	700	6
Pier of Waste Oil Separation Facilities of Vessels		76	—	8.0	3,000	1

					Fixed Number of Vessels Coming alongside	
Name		*Length (m.)*	*Width of Apron (m.)*	*Fixed Depth of Water (m.)*	*Gross Tonnage*	*No. of Berths*
Suma Harbour	S.	180	15	5.5	2,000	2
	E.	90	15	5.5	2,000	1
Port Island	C. 1- 9	2,650	40	12.0	25,000	9
	L. 1-15	3,000	20	10.0	15,000	15
Port Island Dolphins for bunkering facilities		385	—	13.0	50,000 3,000	1 1
Kobe Fukae Ferry Terminal		170	16	7.5	8,000	1
Mooring Dolphins		1,800	—	10.0—12.0	(total) 84,000	9

Wharves for Large Vessels (Private)
E=East side W=West side S=South side

Mitsui Pier	W.	177	11	10.0	10,000	1
	E.	185	11	10.0	10,000	1
Takahama Wharf	W.	193	11	8.2	8,000	1
	E.	325	13	8.2	8,000	2
K.S. Nos. 1-5		1,527	1.5	9.5—13.0	10,000	5
Unclassified		6,377		4.5—13.0	500-150,000	51

(The column includes most of the private piers and of the fitting-out quays belonging to Kobe Shipyard & Engine Works of Mitsubishi Heavy Industries, Ltd. and Kawasaki Heavy Industries, Ltd.)

Mooring Buoys

The whole sea surface within the Port Limits is divided into 6 sections.

				Fixed No. of Vessels Coming Alongside	
Section	*Owner of Buoys*	*No. of Buoys*	*Buoy Number or Designations*	*No. of Vessels Moored*	*Gross tonnage*
No. 1	Kobe City Government	4	Nos. 31-34	4	8,000
No. 2	Kobe City Government	12	Nos. 1-12	12	2,000—20,000
	Kawasaki Heavy Industries Ltd.	2	A, B	2	3,000— 8,000
	Mitsubishi Heavy Industries Ltd.	2	C, D	2	4,000—18,000
No. 3	Shell Sekiyu Kaisha, Ltd.	4	Shell Buoy	1	70,000
	Maruzen Kanematsu and Esso Companies	4	MKS Buoy	1	50,000
No. 5	Kobe City Government	2	Nos. 21(A,B)	1	10,000

TANKERS:

The Port Island receives bunker oil from tankers into the terminal and delivers Intermediate 15 and MDO by pipe-line to vessels moored at Kobe Port Island. This berth is equipped with loading arms and utilises a boom completely surrounding the discharging tanker to prevent the spread of any oil spill.

Storage facilities consist of 3 tanks of 36,000 kl (226 mb) for Intermediate 15 and 2 tanks of 5,000 kl (31 mb) for MDO.

Pumping facilities consist of 3 pumps of 700 kl/hour (4,400 b.p.h.) capacity for Intermediate 15 and 2 pumps of 200 kl/hour (1,258 b.p.h.) capacity for MDO.

Special features include an automatic control system from a central control board, remote valve operation, remote tank gauges, communication equipment at each bunkering berth, flow meters for all deliveries, a chemical fire engine, a crane and a lorry for recovery of waste oil.

The terminal is open between 0900 and 1700 hrs. and availability at other times involves overtime.

(Tankers)

Name of Berth	*Max. d.w.t. (approx.)*	*Max. LOA*	*Max. safe Draft*	*Mooring–Pipeline–discharging rate*
Shell. Bunkers ex-barge only. No slop discharge facilities.	70,000	250 m.	12.6 m.	To 4 buoys. 1×24″, 1×12″ for F.O., D.O. Minas/Seria Waxy Residue. Average discharge rate (1 Pipe) 1,000 t.p.h. Max. (2 Pipe) 3,000 t.p.h. (mooring possible when tide runs towards West)
MKS. Bunkers ex-barge only.	40,000	234 m. (breadth 33 m).	11.20 m.	To 3 buoys. 2×16″ for F.O. and D.O. Average discharge rate 1,000 t.p.h. Max. 1,300 t.p.h. (mooring possible when tide runs towards West)
Mitsubishi Shoji (for L.P.G. tankers). Bunkers available ex-wharf; ex-barge at anchorage. No slop discharge facilities.	45,000	240 m.	10.35 m.	Alongside Pier. 2×12″ for F.O. and 1×12″ for D.O. Average discharge 800 t.p.h. per pipe. Max. 2,000 t.p.h.
Port Island Oil Berth	70,000	240 m.	10.98 m.	2×16″ for Fuel oil. Average discharge rate 2,000 t.p.h. Max. 3,500 t.p.h.

TIDE: Mean height of tide 1.030 m. Some of tanker berths in West part of port affected by tide. Currents less than 1 knot inside harbour.

DENSITY: Winter: 1023–1026. Summer: 1018–1022.

FRESH WATER: Supplied from the quays at rates of 40 to 50 cu. m. per hour. Three water barges available, largest with capacity 325 cu. m., can supply vessels at rates up to 300 cu. m. per hour.

Possible to supply fresh water at anchorage weather permitting. 24 hours prior notice is required.

FUEL: All grades are obtainable from major oil companies and supplied by barge.

DRY DOCKS:

Owner	*Name*	*Overall length* m.	*Width* m.	*Depth* m.	*Remarks*
Mitsubishi Heavy Industry Ltd.	Dock No. 4	290.0	41.2	13.0	Capacity 150,000 d.w.t.
Kawasaki Heavy Industry Ltd.	Dock No. 1	160.0	22.0	8.83	The largest ship docked: 215 m.×30.5 m.×6.8 m. Capacity for No. 4 – 50,000 d.w.t.
	Dock No. 2	94.0	15.4	14.8	
	Dock No. 3	172.8	26.0	13.0	
	Dock No. 4	215.0	33.5	11.0	

(Number of docks in Kobe)

Kobe Dockyard Engine Works Co. Ltd.	3 floating docks
Ishihara Shipyard Co. Ltd.	1 floating dock
Arata Dockyard & Engine Works Co. Ltd.	1 floating dock
Shikase Dockyard Ltd	1 floating dock
Mitsubishi Heavy Industries Ltd.	3 floating docks 1 dry dock
Kawasaki Heavy Industries Ltd.	2 floating docks 2 dry docks

SURVEYORS: Lloyds Register, Germanischer Lloyd, American Bureau of Shipping, Bureau Veritas, Norske Veritas, Nippon Kaiji Kyokai.

REPATRIATION: Possible.

AIRPORT: Osaka International Airport. Distance from Airport about 1 hour by car.

Domestic: Following regular airlines, Japan Air Lines, All Nippon Air Lines, Nihon Kokunai Koku, Toa Koku.

International: For Far East: Japan Air Lines 31 flights per a week, Thai International Air Lines 10 flights per a week, Cathay Pacific Air Lines 8 flights per a week, China Air Lines 11 flights per a week, Korean Air Lines 12 flights per a week, North-West Air Lines 7 flights per a week.

For Europe: Lufthansa 1 flight per week, British Airways 3 flights per week, Air France 2 flights per week.

For United States: Japan Air Lines 12 flights per week, Pan American 3 flights per week.

TIME: GMT plus 9 hours. No alteration to clocks throughout year.

HOLIDAYS: 1st January (New Year's Day); 15th January (Coming-of-Age Day); 11th February (National Founding Day); 21st March (Spring Equinox Day); 29th April (The Emperor's Birthday); 3rd May (The Constitution Day); 5th May (Children's Day); 15th September (Respect for the Aged Day); 23rd September (Autumn Equinox Day); 10th October (Health Sports Day); 3rd November (Culture Day); 23rd November (Labour Thanksgiving Day).

POLICE/AMBULANCE/FIRE: *Police* 110 Water Police Station tel. 33–2351, 33–2354, Ikuta Police Station 33–0044, Fukiai Police Station 23–4441, Hyogo Police Station 55–0051.

Ambulance: 119 Ikuta Fire Department 39–4994.

Fire: 119 Water Fire Department 33–9951, Ikuta Fire Department 33–4994, Fukiai Fire Department 29–0401, Hyogo Fire Department 56–6141.

TELEPHONES: Possible to place telephone on board.

SERVICES: Compass adjusting, radio/radar services, etc.

GENERAL: When typhoon approaching, Port captain requires ships to proceed outside breakwater.

SHORE LEAVE: Crew members free to go ashore with landing passes issued by Immigration Authorities.

DELAYS: 1. Weather condition (where strong wind prevents ships entering port). 2. Tide (berths in West part of port). 3. Berths where no ships permitted berth alongside at night. 4. Where a quarantine officer or Pilot being awaited. 5. Shortage of gangs, weather.

AUTHORITY: Port and Harbour Bureau.

AGENT: Dodwell Tramp Agencies, PO Box 557 Kobe Port, Kobe Meiji Seimei Building 3–7, Isogami-dori 8-chome Fukiai-ku, Kobe. Tel. (078) 251–0021. Telegraphic "Dodtramp Kobe". International Telex J 78826.

KOKURA: 33.54 N. 130.53 E. (See "Kanmon-Ko") (See Plan Book)

Kokura situated between Moji and Tobata. On the East is contiguous to Moji Port, on the West to Tobata Port and on the North it opens to the Kanmon Straits.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Inland Sea Pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to Pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from one of three Pilot stations dependent upon vessel's last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations. Also see "Shipmasters Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits) Position 34° 38′ N. 135° 11′ E. Telegraphic address: "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse (vessels transitting Bungo Channel). Position 33° 13′ N. 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimoneseki) Straits. Position 33° 56′ 24″ N. 131° 03′ 12″ E.

ANCHORAGE: Anchorage not in use as the area is being dredged for the purpose of navigation fairway.

RESTRICTIONS: Vessel enters port only within 1 hour before and after slack tide in daytime. No night departure.

MAX. SIZE: 18,000 tons gross., 10 m. draft.

HEALTH: At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards and Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers' health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi and Northbound to Nagasaki Radio respectively.

TUGS: See "Moji".

BERTHING:

Name of berth	*Length* m.	*Depth* m.	*Permissible draft* m.	*Capacity*
Murasaki Kawajiri Wharf	225	10.0	10.0	20,000
Sunatsu West Wharf	366	8.4	8.4	10,000
Sumitomo Metal West No. 1 Wharf	270	—	10.4	—
Hiagari Wharf				
No. 3	OA180	10	10	20,000
No. 4	OA180	10	10	20,000
No. 5	OA180	10	10	30,000
Ferry	270	5.5	5.5	5,000
No. 6	OA200	10	10	20,000
No. 7	OA200	10	10	20,000
Kanematsu Oil Pier	OA170	6.5	6.5	DW 18,000

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

(a) Max. 6 gangs are available.
Stevedores, regular employees 116, temporary labourers 109. Longshoremen 459.

(b) Lighters: Kokura Marine Transportation Co., lighters 25, tonnage 8,900 tons.

(c) Shore crane:

No.	*Capacity*		*Location*	*Owners*
2	10 tons		Sunatsu Wharf	Sumitomo Metal
1	6 tons		,,	Kokura Marine
3	12 tons	outreach 18 m.	Sumitomo Metal Wharf	Sumitomo Metal
3	35 tons		Hiagari Wharves Nos. 6 and 7	Shin Nihon Steel Corp.

(d) Floating crane: arrangeable from Moji.

(e) Average performance of loading/discharging:
Discharging: Iron ore 40/50 t.p.h./gang/hatch (by ship's gear). 200 t.p.h./gang/hatch (by shore crane). Coal 40/50 t.p.h./gang/hatch (by ship's gear). 100/150 t.p.h./gang/hatch (by shore cranes). Scrap steel, pressed 20 t.p.h./gang/hatch (by ship's gear). Ordinary 10 t.p.h./gang/hatch (by ship's gear). Bulky 5 t.p.h./gang/hatch (by ship's gear). Loading: Steel under 20 ft. long 25–30 t.p.h./gang/hatch, over 20 ft. long 15–20 t.p.h./gang/hatch.

(f) 2 shifts: 0800 to 1700 hrs. and 1700 to 0700 hrs. Normal working hours: 0800 to 1700 hrs. Refer to Moji for further information.

TANKERS: Also see "Berthing". At Kanematsu-Goshi Oil Refinery 1×8 in. and 1×10 in. diameter shore pipe-line. No slop facilities available.

DENSITY: 1025.

FRESH WATER: From hydrants at Sunatsu and Sumitomo Metal wharves, the rate of delivery per hour: 30 tons per hydrant. Also delivered by barge.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at max. 7 days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: See "Moji".

REPAIRS: See "Moji".

AIRPORT: All Nippon Airways, Kitakyushu, about 30 minutes by taxi from Kokura station to airport. Japan Air Lines, Fukuoka, and Cathay Pacific Air Lines. Fukuoka, about 1.5 hours by train and taxi from Kokura station to airport.

TIME: GMT plus 9 hours. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police 56–7171; Ambulance 119; Fire 92–4831.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

SHIPMASTER'S REPORT: 1975, Vessel discharged iron ore at Sumitomo Metal Industries.

Pilotage: Arriving from East. He Saki: Lat. 33° 56′ 24″ N. Long. 131° 03′ 12″ E. Arriving from West. Mutsure: Lat. 33° 58′ 30″ N. Long. 130° 53′ 00″ E.

Anchorage:

He Saki: Lat. 33° 56.2′ N. Long. 131° 02.9′ E. Depth 11.4 m.

Mutsure: Lat. 34° 00.0′ N. Long. 130° 52.5′ E. Depth 19.0 m.

Departing from He Saki anchorage to arrive to port of destination in Kanmon Straits in Slack Water and only in daylight.

Normally Pilot boarding 1 hour before tide change. Allowable Drafts to transit Kanmon Straits Max. 30 ft. anytime. Max. 32 ft. 10 in. at High Water.

Radio Pratique: Obtained if in possession of valid Sanitary Certificate and all Smallpox Certificates valid. Send cable to Agent with prefix RPM following the standard text.

Docking: Always Starboard side.

Anchor: Port anchor ready for emergency.

Fenders: Prismatic Rubber.

Gangway: Ship's Accomodation ladder.

Discharging Facilities: 3 Cranes – Capacity 180 t.p.h. each.

Departure from Dock: Undocking only in daylight and about 1 hour before slack water. 3 tugs are necessary for turning the vessel in the narrow basin to head out.

Under completion 2 Unloaders Canti-Lever, Bridge type with capacity of 1200 t.p.h. each.

AUTHORITY: Kita Kyushu Port Authority.

AGENT: See "Moji".

KOMATSUSHIMA: 34.00 N. 134.36 E. (See Plan Book)

DOCUMENTS:

Ship's Register.
Last Port Clearance.
6 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 5 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory. 3 authorised licensed Pilots available.

ANCHORAGES: Situated at Western corner of Komatsushima Bay and port protected by three breakwaters, North, East and South covering 396,700 sq. m. Depths of water at anchorages as follows: *(a)* Inside breakwater 8–10 m., *(b)* Outside breakwater 8–13 m., *(c)* Wharf 8.50 m.

RESTRICTIONS: Vessels must get permission and instructions where to anchor from Port Captain before arrival. Wharf and Inner harbour: entering and sailing usually only during day-time regardless tide and current. Outer harbour: Entry and sailing anytime.

MAX. SIZE: Anchorage inside breakwater: length no limit, breadth no limit, draft 8.60 m.

Anchorage outside breakwater: length no limit, breadth no limit, draft 8.60 m.

Wharf. (Suitable 10,000 d.w.t.). length 175 m., breadth no limit, depth 9 m.

Shinko Wharf: (Suitable 10,000 d.w.t.) Length 175 m. Draft 8.5 m.

Kanaiso Wharf. (Suitable 10,000 d.w.t.) Length 175 m. Draft 8.5 m.

Kanaiso Wharf. (Suitable 15,000 d.w.t.) Length no limit. Draft 10 m. after dredging.

HEALTH: Pratique to be obtained at Shimotsu prior arrival Komatsushima. At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Wharf and inner harbour: join vessel at sea anchorage, always using tug's line without charge. Outer harbour: no tug required in normal conditions.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by telegram.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gears not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1630–2130 hrs. 60% additional of basic stevedorage; 2130–0500 hrs. next morning special additional; Sundays/holidays 100% additional.

MEDICAL: No advance notice required unless urgent.

DENSITY: 1015.

FRESH WATER: Alongside berth: Can be supplied by shore line with capacity of 25 t.p.h.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock at maximum 7 days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None. Nearest consulates in Osaka.

REPAIRS: Only minor repairs up to 3,000 d.w.t..

DRY DOCKS: No dry dock. Nearest at Hitachi Shipbuilding & Engineering Co. Ltd., Chikko works, Osaka; Kawasaki Heavy Industries Ltd., Kobe and Mitsubishi Heavy-Industries Reorganised Ltd., Kobe Shipyard & Engine Works.

AIRPORT: Nearest airport Tokushima (10 miles North) where TOA Domestic Airlines, 9 flights to Osaka, 1 to Tokyo.

TIME: GMT plus 9 hours. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police tel. 110; Ambulance 119; Fire 119.

TELEPHONES: No facilities for placing telephones on board.

SERVICES: None.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port Administration Office.

AGENT: See "Niihama".

KUDAMATSU: 34.00 N. 131.52 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Inland Sea Pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from 1 of 3 Pilot stations dependent upon vessel's last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations. Also see "Shipmaster's Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits) Position 34° 38′ N. 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse (vessels transitting Bungo Channel). Position 33° 13′ N. 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimonoseki) Straits. Position 33° 56′ 24″ N. 131° 03′ 12″ E.

ANCHORAGE: Kudamatsu loading anchorage Lat. 33° 59′ 40″ N., Long 131° 51′ 20″ E.

RESTRICTIONS: No restriction for entry into and/or departure from anchorage during night and day time. But berthing/unberthing effected during daytime only.

MAX. SIZE: No restriction on length, breadth, and draft for any vessel entering port, but maximum safe draft for Nippon Oil Refinery Wharf 12 m. Max. d.w.t. 55,000 tons, and for Toyo Kohan Wharf 11 m.

HEALTH: Radio Agent for free pratique not less than 12 hours and not more than 36 hours before arrival, advising full details of vessel and health condition on board. When free pratique is granted by radio vessel will be required to submit the following documents to Quarantine Officer on arrival at Quarantine anchorage (33° 56′ N., 131° 51′ 30″ W.):

Maritime Declaration of Health.
Crew List.
Passenger List.

The following vessels will not be able to get radio pratique:

A vessel that has been in contact with an infected area or a suspected infected area within 15 days of arrival.

If a vessel has on board any case, or suspected case, of infectious disease within 15 days of arrival.

If crew or passengers on board do not possess valid Smallpox Vaccination Certificate.

If a vessel does not possess a valid Derat or Derat Exemption Certificate.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel to Choshi and Northbound to Nagasaki Radio respectively.

TUGS: Tugs normally join vessel proceeding to Nippon Oil Refinery Wharf at Lat. 33° 58′ 20″ N., Long 131° 53′ 30″ E. and proceeding to Toyo Kohan Wharf at Lat. 33° 59′ 40″ N., Long. 131° 51′ 20″ E. Tug's line used and charges for line's use is included in tug-boat operation charge. 8 tugs available, 2,000–4,000 h.p.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft & LOA (m.)*	*Capacity (g.t.)*	*Shore Cranes*
Nippon Petroleum					
South Pier		13.0	12.0	40,000	
West Pier	110	7.0	6.5×100	5,000	
Toyo Kohan Pier	270	9.0	8.0×200	8,000	1×12 T 1×20 T

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

TANKERS: At Nippon Oil Refinery 2×10″ shorelines. Indonesian Crude, 6/7000 t.p.h. P. G. Crude, 1,200 t.p.h. and Fuel Oil, 500 t.p.h.

DENSITY: 1025.

FRESH WATER: At anchorage, section II Kudamatsu: water barges available from Tokuama. Rate of delivery 50 t.p.h. At Nippon Oil Refinery and Toyo Kohan Wharf, hydrants are available. Rate of delivery 20 t.p.h.

FUEL: Major oil companies are represented and all grades of marine oil can be delivered, usually by barge.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gears maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Small repairs possible.

DRY DOCKS: Kasado Dockyard Co. Ltd.

Dry dock	*Length (m.)*	*Breadth (m.)*	*Depth (m.)*	*Docking capacity (g.t.)*
No. 1	152.10	22.71	8.90	10,884
No. 2	107.71	16.46	7.48	3,600
No. 3	220.00	37.00	11.00	34,497

REPATRIATION: Possible.

AIRPORT: Ube and Hiroshima airports: distance about 2 hours by train, and from Ube to Tokyo 1 flight per day and from Hiroshima 4 flights per day.

TIME: GMT plus 9 hours. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police 41–0615, emergency 110; Ambulance 41–2840, emergency 119; Fire 41–2840, emergency 119.

TELEPHONES: No arrangements exist for placing telephones on board.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port and Harbour Dept.

AGENT: Sub-agents of Dodwell & Co. Ltd., Sankyu Unyo Kiko K.K., 1379–14 Aza Yamzakiya, Oaza-Nishitoyoi, Kudamatsu-shi. Yamaguchi-Ken. Tel. Kudamatsu (0833) 43–0390. Telegraphic Address "Sankyuunyu Kudamatsu". Telex: 6754–67.

KURE: 34.15 N. 132.32 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc., (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Inland Sea pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to Pilot station. Inland Sea Pilot Association covers all Inland Sea Ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from one of three Pilot stations dependent upon vessel's last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations. Also see "Shipmaster's Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits) Position 34° 38′ N., 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse (vessels transitting Bungo Channel). Position 33° 13′ N., 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimonoseki) Straits. Position 33° 56′ 24″ N., 131° 03′ 12″ E.

ANCHORAGES:	*Minimum Depth*	*Minimum bottom width*	*Density of water*	*Nature of bottom*
Entrance Channel	20 m.	No limit	Summer Av. 1020	
Harbour Channel(s)	20 m.	No limit	Winter Av. 1025	Mud and sand

Depths refer to M.W.L. Difference between datum quoted and chart datum: about 2 m. (to be added) Rise of tide: springs 3.4 m. neaps 2.6 m.

Also Mooring buoys and Harbour Anchorage. (See "Berthing").

HEALTH: Radio pratique available. Vessels usually anchor at the quarantine anchorage where the authorities board and grant free pratique. Quarantine anchorage (approx. 34° 13′ 45″ N., 132° 31′ 00″ E.)

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Tugs normally join vessel at quarantine anchorage area. Tug's lines free of charge.

BERTHING: Pilots do not agree to berth or unberth outside period from sunrise to sunset. For berthing, at least 1.5 hours advance arrival necessary to reach berth before sunset. Mooring buoys: 3 buoys available in harbour for vessels less than 15,000 d.w.t. Harbour anchorage: 3 anchorages with good ground (mud) and suitable vessels up to 80,000 d.w.t. LOA 300 m.

Name of Berth	*Length (m)*	*Depth (m)*	*Permissible Draft (m)*	*Capacity (d.w.t.)*
Showa Municipal Pier No. 1	150	7.5	7.0×150	15,000
Nisshin Steel Mill No. 3	270	18.0	17.0	150,000

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notifed by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

TANKERS: No facilities.

FRESH WATER: For domestic and boiler, 330 k/tons per barge (1 barge available, at 3 days notice, from Kure City office), delivering rate about 100 k/t.p.h. (50% additional for overtime, Sundays/holidays and Saturday afternoon also additional to basic rate for outside harbour limit).

FUEL: Most grades of domestic oil are available, bonded bunkers will be brought by barges from Iwakuni, Tokuyama, Moji or Kobe with three days advance notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: No consul available, but marine note of protest can be attested by the local notary public.

REPAIRS: All types of deck and engine repairs are possible.

DRY DOCKS: (Ihi-Kure). Dimensions of No. 4 Dry Dock (length 338.3 m., width 43 m., depth 17 m.) – 160,000 d.w.t. No. 3 Dry Dock, for up to 800,000 d.w.t. (length 510 m., width 80 m., depth 13.5 m.).

REPATRIATION: Possible.

AIRPORT: Hiroshima airport, distance approximately 35 km. – 40 km. and about 60–90 minutes by car. Only domestic regular airlines available. 4 flights to Osaka and 6 to Tokyo, daily.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police (for emergency) 110; Ambulance 119; Fire 119.

TELEPHONES: No arrangements available for placing telephones aboard.

GENERAL: Kure is a local port which makes it difficult to arrange all requirements. At least 3 days notice helpful.

SERVICES: All navigational apparatus can be serviced as required. Cargo holds cleaning service can also be carried out, but tank-cleaning equipment and services to be arranged from Kobe area, otherwise through IHI Kure Shipyards.

SHORE LEAVE: Local Immigration Offices issue shore pass valiu for 3 days only, but 3 days extension possible if ship stays longer.

AUTHORITY: Port and Harbour Dept.

AGENT: Sub-agents of Dodwell & Co. Tokyo. Naigai Unyu Co. Ltd., 1-7, 1-chome, Naka-dori, Kure-shi, Hiroshima-Ken. Tel. Kure 0823 21-5181/7. Telegraphic "Naigai Kure". Telex: 6623-40.

KUSHIRO: 42.58 N. 144.21 E.

DOCUMENTS: Ship's Register. Last Port Clearance. 3 Crew Lists including Passport Nos. 3 Passenger Lists. 1 Store List. 1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: No telegraphic address. Previous advance notice, minimum 8 hours advance notice ETA and any alterations. Contact Pilot boat through Harbour office/tug boats with wireless telephones. Pilot boat has no radio telephone. Pilot boat waits at Quarantine anchorage (1,000 m. off and 280° from North Breakwater white light), and entrance of Breakwater during Winter period (December–March).

ANCHORAGE: Bottom sand and mud. Min. depth 9 m. in passage and 7.5 m. in anchorage. Depth over 29.5 ft. 162,075 sq. m., Section 2; Depth over 24.5 ft. 690,000 sq. m., Section 2 and 3; Depth under 24.5 ft. 393,600 sq. m., Section 3. Tidal range, average high-tide plus 1.533 m., average low-tide plus 0.154 m., average tidal difference plus 0.953 m.

RESTRICTIONS: Vessel allowed enter and sail day and night. Pilot assistance officially not compulsory but in practice necessary, and Pilot service available sunrise to sunset for entry and up to 2200 hrs. for sailing.

MAX. SIZE: See "Berthing".

HEALTH: Radio pratique available. Formalities will be carried out at the anchorage. Quarantine station 1,200 m. – 293° off Kushiro breakwater Red Lighthouse.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Usually join vessel at entrance of breakwater and ship's lines to be used.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio. All berths limited by depth in entrance channel.

Berth	*Length (m)*	*Depth (m)*	*Capacity d.w.t.*
Central Pier No. 1 & 2	340	9.0	10,000×2
No. 3	180	10.0	15,000×1
No. 4	130	8.0	10,000×1
No. 5	130	7.5	5,000×1
No. 6	130	7.5	5,000×1
North Pier No. 1 & 2	383	8.0	10,000×2
North Pier Tip	109	8.0	3,000×1
North Pier No. 3	148	8.0	6,000×1
New South Pier	130	7.5	5,000×1
South Pier	91	5.4	2,000×1
,,	218	7.5	5,000×1
Tanker Berth No. 1	161	8.0	6,000×1
No. 2	148	8.0	6,000×1

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gears not rigged on berthing, stevedores will do same for ships' crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

TANKERS: North Pier – 3 berths for 20,000 d.w.t.×2 and 18,000 d.w.t.×1. Hose-diameters 10 in.×1, 8 in.×3, 6 in.×3. South New Pier – 1 berth for 3,000 d.w.t. Hose-diameters 10 in.×1.

DENSITY: Average 1025 inner breakwater high-tide, and average 1022 low-tide.

FRESH WATER: Direct supply from the wharves or by barge.

FUEL: Domestic oil is available; bonded oil will be brought from Hakodate or Muroran with sufficient advance notice.

DEVELOPMENT: Total of 21 berths including 4 for up to 40,000 d.w.t. Industrial raw materials carriers will be built and port breakwater will be lengthened by 3,940 m.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None. U.S. Consul located in Sapporo city.

REPAIRS: Ordinary deck, engine and electrical repairs arrangable by the local factory.

DRY DOCKS: None; nearest located in Hakodate and Muroran ports.

REPATRIATION: Possible.

AIRPORT: Kushiro airport about 40 minutes taxi or direct connection bus from port area. Flight service daily, 2 flights for Tokyo and 1 flight for Sapporo.

TIME: GMT plus 9. No alterations made to clocks during year.

HOLIDAYS: 1st May.

POLICE/AMBULANCE/FIRE: Police HQ 23-7111 or emergency 110; Hospitals Kushiro Grand Hospital 41-6121, Kushiro Red-Cross Hospital 22-7171; Fire HQ 22-2156 or emergency 119.

TELEPHONES: No systems for arranging on board.

GENERAL: All port facilities services except wharfage applicable. Winter period additional charges 30%–50% while 1st December and 31st March (all Hokkaido ports same).

SERVICES: Arrangable from Muroran.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Kushiro-Shiyakusho.

AGENT: Sub-agents Dodwell & Co. Ltd., Tokyo, Narasaki Sangyo Co. Ltd., c/o Mitsuwa Transport Co. Ltd., Attn. Shipping Agency Dept., Minami Hama-cho, Kushiro-shi, Hokkaido. Tel. Kushiro (0154) 22-0903. Telegraphic "Mitsuwa Kushiro".

MAIZURU: 35.27 N. 135.19 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agents should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory. Pilots are available at the anchorage near Kanegasaki for vessels requiring Pilot services. Pilot station: 35° 32′ 00″ N., 135° 18′ 30″ E.
ANCHORAGE: Section 2, Depth 9 m. Section 3, 17 m.
RESTRICTIONS: Channel depth 12.0 m.
MAX. SIZE: See "Berthing".
HEALTH: Radio pratique available. Vessels usually anchor at the outer harbour where the authorities board and grant free pratique. No. 1 Quarantine Anchorage (Outer) 35° 30′ 15″ N., 135° 20′ 42″ E. No. 2 Quarantine Anchorage (Inner) 35° 29′ 15″ N., 135° 20′ 32″ E.
RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.
TUGS: Both ship's and tug's lines used. 3 tugs available, 1×1,600 h.p. and 2×100 h.p.
BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth		*Length* (m.)	*Depth* (m.)	*Permissible draft* (m.)	*Capacity* (g.r.t.)
No. 1 Pier		86	4.0	4.0	—
No. 2 Pier	No. 1 wharf	110	7.3	6.5	3,000
	No. 2 wharf	120	7.3	6.5	5,000
	No. 3 wharf	185	9.0	8.1	8,000
	No. 4 wharf	105	7.3	6.5	—
No. 3 Pier	No. 1 wharf	185	10.0	9.0	—
	No. 2 wharf	150	10.0	9.0	—
	No. 3 wharf	185	10.0	9.0	—
No. 4 Pier		185	10.0	9.2	15,000

Buoy		*Location*	*(m.)*	*Capacity* (g.r.t.)
Kita Buoy	No. 1	35° 27′ 22″ N., 135° 19′ 13″ E.	14	15,000
Ohgimi Buoy	No. 1	35° 30′ 28″ N., 135° 23′ 34″ E.	14	15,000
Katsura Buoy	No. 1	35° 28′ 38″ N., 135° 20′ 27″ E.	6	5,000
Taira Buoy	No. 1	35° 30′ 34″ N., 135° 23′ 34″ E.	6	5,000
	No. 2	35° 30′ 01″ N., 135° 23′ 27″ E.	8	12,000
	No. 3	35° 30′ 17″ N., 135° 23′ 31″ E.	14	15,000

Remarks: No. 1 pier is exclusively used by fishing boat. No. 2 pier, No. 4 wharf is exclusively used by domestic ferry boat. No. 2 pier, No. 3 wharf is only accessible for 130 m. when ferry boat is alongside at No. 4 wharf. Taira Buoys (No. 1–No. 3) are for discharging of logs/lumber only.
STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.
MEDICAL: No advance notice required unless urgent.
DENSITY: 1025.
FRESH WATER: Available from wharf and by barge.
FUEL: Domestic oil is available; bonded oil will be brought from Moji, with sufficient advance notice.
GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.
OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.
CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.
CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.
CONSULS: None.
REPAIRS: Possible.
DRY DOCKS: 246 m.×33.5 m.×12.5 m. Two others.
REPATRIATION: Possible.
AIRPORT: None.
TIME: GMT plus 9 hours. No alterations made to clocks during year.
POLICE/AMBULANCE/FIRE: Police 07736–5–0810; Ambulance 07736–5–2174; Fire 07736–5–2174.
TELEPHONES: Not possible to place telephones on board.
SERVICES: None.
SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.
AUTHORITY: Port and Harbour Dept.
AGENTS: Sub-agents of Dodwell & Co. Ltd., Tokyo. Iino Kaiun Kaisha Ltd., Maizuru Office, 18–5, Koaza Shimasaki, Oaza Matsukage, Maizuru-shi Kyoto-fu. Cable Address: Iino Maizuru. Domestic Telex: 5734–426 Maizuruiino Mai. Tel.: Maizuru (0773) 75–21112/7.

MATSUYAMA: 33.52 N. 132.42 E. (See Plan Book)

DOCUMENTS:
Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.
PILOTAGE: Inland Sea Pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from 1 of 3 pilot stations dependent upon vessel's last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations. Also see "Shipmaster's Reports" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits) Position 34° 38′ N., 135° 11′ E. Telegraphic address "Anjin Kobe".
2. Sekisaki, 3 miles South of Sekisaki lighthouse (vessels transitting Bungo Channel). Position 33° 13′ N., 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible, having due regard to safety, to Sekisaki Pilot station.
3. Hesaki, at East side of Kanmon (Shimonoseki) Straits. Position 33° 56′ 24″ N., 131° 03′ 12″ E.

ANCHORAGE: The port faces Iyo-Nada and located near Bungo Straits. Entrance open to Iyo-Nada towards West, but port protected by West breakwater and small island off Northern part of approaches where holding ground good. During Winter months strong N.W. wind prevails causing heavy swell at anchorage. Depth of water 17–25 m.
RESTRICTIONS: *Oil tanker berth.* Vessel drawing less than 12 m. can moor and unmoor at half-flood during daytime but vessels drawing 12 m. or more advised to await high water.

Dry cargo is logs only and cargo working carried out at anchorage of Umaiso and Yura Bay.

Yura Bay. Vessels no longer than 110 m. can berth. Daytime entry only regardless of tide and current.
MAX. SIZE: *Maruzen Oil Co. Ltd., Matsuyama refinery, Genyu Sambashi.* Max. 50,000 d.w.t. Max. LOA, no limit. Max. safe draft 12.00 m.

Umaiso Bays. Length of vessel 160 m.; breadth no limit; draft 15 m.

Yura Bay. Length 110 m.; breadth no limit; draft 10 m.
HEALTH: At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers' health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.
RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.
TUGS: For tankers: join vessel at Quarantine anchorage, using Tug's lines without charge. For dry cargo vessel, no tug required for berthing and unberthing in normal conditions.
BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

General cargo to be loaded/discharged at the following wharves in Matsuyama.

Berth section	*Length*	*Depth*	*Max. size* d.w.t.
Wharf No. 1			
Sect. 1	380 m.	9.5 m.	15,000
Sect. 2	230 m.	5.5 m.	5,000

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gears not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.
MEDICAL: No advance notice required unless urgent.
TANKERS: No advance notice of dia. of load/discharge lines required. See "Max. Size"

Manifold: 1×12 in. (Fuel Oil) 600 t.p.h. and 1×12 in. (Crude Oil) 1,500-2,000 t.p.h. Shorelines 18 in. and 20 in. respectively.
DENSITY: Anchorage 1015. Berth 1015.
FRESH WATER: *Maruzen Oil Co. Ltd., Matsuyama Refinery, Genyu Sambashi.* Can be supplied by shore line with capacity 25 t.p.h.

Anchorage: Can be supplied by 60 ton barge with capacity

60 t.p.h. Strong winds prevail during Winter months, when no water can be supplied.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice. Also see "Moji, Fuel".

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless ship's crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: Consulates in Kobe.

REPAIRS: Only minor repairs.

DRY DOCKS: None. Nearest at Kawasaki Heavy Industries Ltd., Sakaide; Hitachi Shipbuilding & Engineering Co. Ltd., Innoshima and Mukaishima, dimensions of those docks as follows:

Kawasaki Heavy Industries Ltd., Sakaide. Dock No. 2 for 500,000 d.w.t. vessel 450 m.×72 m.×12.3 m. Only used presently for shipbuilding and after services.

Hitachi Shipbuilding & Engineering Co. Ltd., Innoshima Dockyard. Dock No. 1 for 20,000 d.w.t. vessel 175 m.×25 m.×25.62 m.×9.10 m. Dock No. 3 for 130,000 d.w.t. vessel 282.50 m.×47 m.×11.33 m.

Hitachi Shipbuilding & Engineering Co. Ltd., Mukaishima Dockyard. Dock No. 1 for 3,000 d.w.t. vessel 86.18 m.×13.60 m.×6.80 m. Dock No. 2 for 8,500 d.w.t. vessel 125 m.×18 m.×7.40 m. Dock No. 3 for 25,000 d.w.t. vessel 175 m.×29 m.×9 m.

REPATRIATION: Possible.

AIRPORT: Domestic airport situated South of harbour. All Nippon Airways flights to Osaka and Tokyo.

TIME: GMT plus 9 hours. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police 110; Ambulance 119; Fire 119.

TELEPHONES: No facilities for placing telephones on board.

SERVICES: Only at Kobe.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days. 3 days extension possible if ship stays longer.

AUTHORITY: Port Administration Office.

AGENTS: See "Niihama".

MIIKE: 33.00 N. 130.23 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Compulsory; Pilots board at the point 32° 59′ N., 130° 23′ E. Outport Pilots board 1 mile off Kuchinotsu lighthouse, 32° 35′ N., 130° 12′ E. (Advise ETA Kuchinotsu 48 hrs. prior to arrival.)

ANCHORAGES: Lat. 33° 0′ 08″ N. Long. 130° 23′ 50″ E. Harbour limit within circle of 2,700 m. radius centring on lighthouse at West end of Northern breakwater. Roadstead affords safe anchorage, mud and sand.

RESTRICTIONS: Vessel shall dock or depart on high water. Ebb stream begins about half an hour before high water and runs to South for 6 hours. Max. current 3 knots at entrance of channel. Flood stream begins at about low water time and runs to North for 6 hours max. 3 knots at lighthouse. Channel 1800 m. long, 137 m. broad from jetty to jetty, 45.7 m. width at bottom.

MAX. SIZE: No limitation for breadth and length, but max. drafts are as follows: 30 ft. 6 in. up to 20,000 d.w.t.; 28 ft. 10 in. up to 25,000 d.w.t.; 25 ft. 7 in. up to 30,000 d.w.t.

HEALTH: Formalities will be carried out 2 miles off the lighthouse (33° 0′ 8″ N., 130° 23′ 50″ E.). Radio pratique available.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: 3 tugs available. 2×1,100 h.p.; 1×800 h.p.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Capacity*	*Shore cranes & pipe-lines*
North Quay (No. 6, 7, 8)	330	10.7	10.0	2 ×10,000	2×6 tons, 1×10 tons
Dock Pier	90	8.5	8.2	1 × 8,000	
Dock Quay	421	8.5	8.2	2 × 8,000	2 coal loaders
Quay No. 5	91	10.7	10.0	1 × 8,000	1 coal loader
New Quay No. 5	68	10.7	10.0	1 × 6,000	1 coal loader

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

DENSITY: 1025.

FRESH WATER: Available at wharf only. Delivery 20–25 t.p.h.

FUEL: Domestic oil is available; Bonded oil will be brought from Moji or Tokuyama, when required.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gears' maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: Consuls at Moji.

REPAIRS: Minor repairs only.

DRY DOCKS: See "Moji".

REPATRIATION: Possible.

AIRPORT: See "Moji".

TIME: GMT plus 9 hours. No alterations made to clocks during year.

HOLIDAYS: 15th August.

POLICE/AMBULANCE/FIRE: Tel. 110 and 119.

TELEPHONES: Available at stevedores' office at the wharf.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port Administration Office.

AGENTS: Sub-agent of Dodwell & Co. Ltd., Tokyo. Miike-ko Service Center K.K., 1, Shinko-cho, Omuta-shi, Fukuoka-ken. Cable Address: Ringer Omuta; Domestic Telex: 7444–12; Tel.: Omuta (09445) 3–3061.

MISUMI: 32.38 N. 130.27 E. (See Plan Book)

PORT LIMITS: The sea surrounded by the line from Seto-no-hana to the lighthouse on Oyano Island, the line from Togasaki on the same island to Daishiro-bana on Chizoku Island, the line from Daishiro-bana to Usagi-bana on Tobase Island, the line West to Tobase Bridge, and the coast.

DOCUMENTS: 3 Crew Lists, 3 Passenger Lists, 1 Manifest, 1 Customs, 1 Store List, 1 Health Document, 1 Bill of Lading.

PILOTAGE: Pilot Station (acting also as an Agent for foreign vessels).

Misumi Branch Office of the Nippon Tsuun K.K. located at Higashiko 1, Misumi-machi, Uto-gun, Kumamotoken. Tel: 09645-2-3121 or 2-3125.

Misumi Kaiun K.K. located at Higashiko 1, Misumi-machi, Uto-gun, Kumamoto-ken. Tel: 09645-2-3130, 2381 or 3278.

ANCHORAGE: Within port limits.

RESTRICTIONS: A Pilot is not available after dark, also his availability depends on the tidal conditions.

MAX. SIZE: Maximum d.w.t. 15,000 tons. The tidal difference between high and low water is great. (4 m).

HEALTH: All the necessary procedures must be taken at the Misumi Branch Office of the Nagasaki Quarantine Station.

RADIO: Not available.

VHF: Not available.

TUGS: 3 tugs owned by the Misumi Tsuun K.K., 2 tugs owned by the Misumi Branch Office of the Nippon Kaiun K.K.

BERTHING:

Quay	A	Length	137 m.	Depth	8 m.
,,	B	,,	160 m.	,,	9 m.
,,	C	,,	165 m.	,,	9 m.

CRANES: 1 zip crane (fixed) owned by the Kumamoto Prefecture. 3 zip cranes (fixed), 2 zip cranes (movable), 2 shovel loaders (movable) and 3 fork-lifts (movable) owned by the Misumi Kaiun K.K.

1 zip crane (fixed), 1 mobile crane (movable), 4 truck cranes (fixed) and 2 pay loader (movable) owned by the Nippon Kaiun K.K.

A vessel is not required to use her own gear along the quays A, B, and C, but is sometimes required to do so at the time of loading and discharging.

STEVEDORES: Advise Agent.

MEDICAL: Advise Agent.

FRESH WATER: Available from the water supply facilities operated by the Kumamoto Prefecture.

Charge: 150 yen per 1 cu.m. 180 yen per 1 cu.m. after business hours.

CONSULS: None.

REPAIRS: Only light repairs possible.

DRY DOCKS: Small docks for less than 1,000 tons.

SURVEYORS: Not available.

GANGWAY/DECK WATCHMEN: Service of watchmen is not necessary.

HATCHES: Opening and closing is done by the stevedores.

REPATRIATION: Misumi Branch Office of the Fukuoka Immigration Office arranges necessary repatriation.

AIRPORT: Kumamoto Airport (about 60 km. distance).

POLICE/AMBULANCE/FIRE: The Oyano Police Station Misumi Police Box located at Higashiko, Misumi-machi, Uto-gun, Kumamotoken. Tel: 09645-2-3150. Nishi Branch Station of UKI Fire Department located at Nakamura, Misumi-machi, Uto-gun, Kumamoto-Ken. Tel: 09645–2–2726.

TELEPHONES: There is no arrangements for placing telephone on board.

SHORE LEAVE: Shore passes are to be issued at the Misumi Branch Office of the Fukuoka Immigration Office.

DELAYS: Delays will be expected when quays are occupied by vessels or a Pilot cannot go on board because of the tidal conditions.

AUTHORITY: Misumi Port Office of the Kumamoto Prefecture.

AGENT: Holme Ringer & Co., Ltd. c/o Misumi Kaiun K.K. 3-1159, Oaza Misumiura Misumi-machi, Undo-gun Kumamoto-ken. Cable Address: Ringer Misumi. Tel: Misumi (096452) 3130.

MIYAKO: 39.39 N. 141.58 E.

DOCUMENTS:

For Quarantine

1 Statement by Ship's Master.
1 Crew List.
1 Passenger List (if any).
Yellow cards for all.
1 Derating Certificate.

For Immigration

1 Declaration of Inward Vessel.
Passport of Seamen's Book for all.
1 Crew List.
1 Application for shore pass.

For Customs

1 Last Port Clearance.
1 Declaration of Inward Vessel.
1 Crew List.
1 List of Crew's Baggage.
1 List of Ship's Store.
2 Cargo Manifest (Discharging).
1 Cargo Manifest (Through).
1 Certificate of Ship's Registry.

For Port Management Office

1 Declaration of Inward Vessel.

For Maritime Safety Base

1 Declaration of Inward Vessel.
1 Crew List.
1 Cargo Manifest (Discharging).
1 Cargo Manifest (Through).

Above documents to be prepared by Master before arrival.

Master to telegraph ETA and crew's health condition directly to Quarantine Miyako before arrival.

PILOTAGE: Pilot not compulsory but arrangable at Master's request. Pilot boards about 1,200 m. from Miyako breakwater light 130 degrees. Master must radio vessel's Agent of ETA 24 hours in advance, because neither telegraphic address of pilot station nor VHF available. In bad weather, wait instructions from Agent.

ANCHORAGE: Quarantine anchorage located at 39° 37′ 9″ N., 141° 59′ 35″ E. outside breakwater and care should be taken not to foul fishing nets.

RESTRICTIONS: Night entry and departure permitted subject to weather conditions.

MAX. SIZE: Draft 9 m. and LOA 175 m., breadth no restrictions. New pier "Fujiwara-futo" now under construction, draft 12 m. and LOA 240 m., breadth no restrictions.

HEALTH: Radio pratique available. Formalities carried out at anchorage.

RADIO: Recommended Master communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. Westbound vessel, via Choshi Radio, and Northbound via Nagasaki Radio.

TUGS: Normally join vessel on passage from anchorage. Tug's line used. One tug available 2,400 h.p.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Max. LOA* m.	*Max. draft* m.	*No. of wharf*	*Max. d.w.t.*
Desaki wharf	214	7.3	2	3,000
,, ,,	175	9.0	1	10,000
Lumber port buoy		8.0	1	
Fujiwara wharf	260	7.5	2	5,000
,, ,,	240	12.0	1	40,000

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additonal; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

TANKERS: No facilities.

DENSITY: Average 1019.

FRESH WATER: Available from wharf about 50 t.p.h. but no water barge. In case vessel urgently requires water at anchorage, tugboat arrangable for this purpose.

FUEL: Domestic oil is available; Bonded oil will be brought from Tokyo or Hakodate, when required.

DEVELOPMENT: New berth named "Fujiwara Pier" under construction.

GANGWAY/DECK WATCHMEN: Not especially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depends on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommended request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register, Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: 60 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Minor deck and engine repairs available.

DRY DOCKS: None.

REPATRIATION: Possible.

AIRPORT: Hanamaki Airport distant 150 km. from Miyako (2.5 hours by car). 1 flight between Hanamaki/Tokyo Monday/Thursday/Friday and Saturday and 2 flights Tuesday/Wednesday and Sunday by Toa Domestic Air Lines (TDA).

TIME: GMT plus 9 hours. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police 2-5011 (Headquarters) and 2-6037 (Water Police Station); Ambulance 119; Fire 119.

TELEPHONES: No facilities for placing telephones on board.

SERVICES: Surveyor, Tally, Hold cleaning, Tank cleaning.

GENERAL: Discharging ex-gearless vessel at wharf unavailable, because no shore crane for discharge.

SHORE LEAVE: Local Immigration Office issues shore pass valid for only 3 days; 3 days extension possible if ship stays longer. If vessel advises longer stay in port on arrival, Immigration can issue shore pass for 9 days.

AUTHORITY: Miyako Port Management Office.

AGENT: Sub-agents of Dodwell & Co. Ltd., Tokyo. Miyako Kowan Unso Kaisha, Ltd. No. 1-12, Rinkodori Miyako-shi, Iwate-ken. Cable address: Koun Miyako. Domestic Telex: 8344-08. Tel: (01936) 2-3501/5. Postal No.: 027.

MIZUSHIMA: 34.31 N. 133.45 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: *(a)* Inland Sea pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to Pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from 1 of 3 Pilot stations dependent upon vessel's last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations. Also see 'Shipmaster's Report' before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits). Position 34° 38′ N. 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse (vessels transitting Bungo channel). Position 33° 13′ N. 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimoneseki) Straits. Position 33° 56′ 24″ N. 131° 03′ 12″ E.

(*b*) Vessels over 50,000 d.w.t. or of draft of more than 12.5 m. are unable to pass through Kurushima Strait and required to transit Wadamisaki.

There are very narrow and crooked channels, such as the Kurushima Strait, maximum tidal current amounting to 10 knots; the Bisan Strait maximum tidal current amounting to 4 knots, and the Akashi Strait, maximum tidal current amounting to 6 knots.

(*c*) Harbour Pilot: Pilots of the Inland Sea Pilots Association are also employed for this pilotage if required, and Pilot boards at Mizushima Quarantine Anchorage (34° 26′ 30″ N. 133° 34′ 30″ E. approximate centre position of quarantine area). However, if an Inland Sea Pilot is employed at the above-mentioned Pilot stations, the same Pilot acts for harbour pilotage.

HEALTH: Radio pratique available. Formalities will be carried out at Quarantine Anchorage 34° 26′ N., 133° 44′ E.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which covers all ports in Japan. If specifically Westbound vessel to Choshi and Northbound to Nagasaki Radio respectively.

TUGS: Tugs normally join the vessel at the Quarantine Anchorage area. Usually tug's lines used free of charge.

BERTHING:

Max. d.w.t.	*Max. LOA*	*Max. safe draft*	*Discharging facilities*	*Discharge rate per hour/gang or unit*
Coal, Iron Ore and Scrap				
(A) *Tokyo Seitetsu*				
(i) A berth – 215 m.				
35,000	190 m.	at high tide 12.0 m.	Ship's gear only	Scrap 20 tons Pig Iron 30 tons
(ii) B and C berths – 300 m.				
20,000	150 m.× 2	9.0 m.	Crane 6 tons×2 Ship's gear	Scrap 30 tons Pig Iron 40 tons
(B) *Kawasaki Steel Corp., Mitzushima Works*				
C Berth				
45,000	445 m.	11.0 m.	28 Tns. Crane×2 22 Tns. Crane×1	
Takahashi-gawa Berth				
45,000	250 m.	11.0 m.	30 Tns. Crane×2	
D Berth – 400 m.				
35,000	No limit	11.0 m.	Ship's gear Shore crane 16 tons×1 17 tons×1	Scrap 15 tons Pig Iron 25 tons
E berth – 976 m.				
0 m. – 656 m. 110,000	No limit	14.80 m.	Unloader 1,500 tons×3	
657 m. – 976 m. 200,000	No limit	14.80 m. – at high tide		Coal 30,000 tons Iron ore 40,000 tons
Grain				
(A) *Nishi Nihon Grain Centre Mizushima Works*				
Nishinihon Wharf (Dolphin)				
60,000	230 m.	12.0 m.	Pneumatic unloader×2	400 tons per unit
(B) *Nishi-Futo*				
(i) 1 berth				
25,000	180 m.	10.0 m.	Ship's gear	Wheat 80 tons Soybean 70 tons
(ii) 2 berth				
15,000	130 m.	9.0 m.	Ship's gear	Wheat 80 tons Soybean 70 tons
(C) *Seto Futo Co. Ltd.*				
Seto Futo				
55,000	No limit	14.0 m.	Pneumatic unloader×1 Level luffing crane×2 Silo capacity 21,000 tons	400 tons per unit 500 tons per unit
Oil				
(A) *Mitsubishi Oil Co Ltd., Mizushima Refinery*				
(i) No 5 Pier (Dolphin)				
80,000	No limit	12.3 m.	Crude oil 12 in.×2 Fuel oil 12 in.×2 Diesel oil 6 in.×1	5,000 tons 1,000 tons 800 tons
(ii) No. 6 Pier (Dolphin)				
230,000	No limit	14.80 m.*	Crude oil 12 in.×3 Fuel oil 8 in.×1	7,000 tons 400 tons
(B) *Nippon Mining Co. Ltd., Mizushima Refinery*				
(i) No. 1 Pier (Dolphin)				
80,000	No limit	12.5 m.	Crude oil 12 in.×2 Fuel oil Diesel oil	4/5,000 tons 7/1,200 tons 600 tons
(ii) No. 2 Pier (Dolphin)				
230,000	No limit	14.80 m.*	Crude oil 12 in.×5 LPG 12 in.×2 Fuel oil 8 in.×1	8,000/12,000 tons 900 tons 400 tons
(C) *Asahi Kasei K.K. Mizushima Works*				
C-8 Pier (Dolphin)				
10,000 (g/t)	No limit	8.3 m.	Chemical (vapour line 4 in.×1) (cargo line 6 in.×1)	100/200 tons

*N.B.—Some allowance may be granted by Pilot depending on tidal condition. Depth of water (14.80 m.)+tide=ship's draft+keel allowance (ship's draft×0.1+0.5 m.).

ANCHORAGES: Anchorages available for small size vessels only, and not for large vessels. In case of large vessels waiting for berthing, these vessels shall wait at Quarantine Anchorage, at around Nabeshima, at nearby Sakatewan or off Kobe.

Around "Q" Anchorage Depth	15–18 m.
Around Nabeshima	,, 32–40 m. (temporarily suspended.)
Nearby Sakatewan	,, 32–41 m.
Off Kobe	,, 43–47 m.

RESTRICTIONS: (*a*) Entering and departing from port shall be in accordance with instructions to be given by Signal Station.

(*b*) No restriction imposed upon entering or leaving port during night-time, nevertheless such movements are next to impossible in consideration of the nature of the structures of the port. In addition Pilots refuse to board during night-time.

(*c*) Super-sized vessels, unable to enter except at high tide.

Pilots should be consulted in advance for draft exceeding 14.80 m.

MAX. SIZE: See "Berthing".

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notifed by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additonal cost. Overtime surcharges 1700–2100 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

TANKERS: See "Berthing".

DENSITY: Entrance channel Summer average 1020, Winter average 1023. Harbour channel Summer average 1019, Winter average 1025.

FRESH WATER: Available at berth, ex-pipe-line. Average delivery rate 20 k/t/hour. Water barges available, sent from Onomichi. Delivery rate approximately 50 k/tons per hour.

FUEL: Most grades available.

FIRE PRECAUTIONS: (*a*) Whenever necessary to repair vessel, the rule of "Strictly and Completely No Fire" is to be observed. (*b*) To keep sufficiently powered tugboat alongside vessel at all times when engine is under repair. (*c*) A written pledge to be submitted to Oil Company, promising to take full responsibility and to pay full indemnity by ship's Owners (in case of repairing vessel) if any accident has occurred by fault of the vessel.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gears maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: No consul available, but marine note of protest can be attested by the local notary public.

REPAIRS: All types of deck and engine repairs possible by Mitsui Shipbuilding and Engineering Co. Ltd., Tamano Works. Minor repairs possible by Nojima Senpaku Co. Ltd., Mizushima Works, Sonkyo Nainenki Seisakusho Co.

DRY DOCKS: No dry docks at Mizushima, but Mitsui Shipbuilding and Engineering Co. Ltd. Tamano Dock is the nearest from Mizushima, distance approximately 20 miles and navigation about 2 hours.

Mitsui Shipbuilding and Engineering Co. Ltd., Tamano Dock.

(*a*) Dimensions of largest dry dock No. 3 D Dock (length 672 ft. × width 103 ft. 3 in. × depth 32 ft.). (*b*) Number of small docks: 2.

AIRPORT: Okayama airport is the nearest from Mizushima, distance approximately 40 km. and takes about 40 minutes by car. Only domestic regular airlines available. 3 flights to Tokyo, daily.

TIME: GMT plus 9 hours. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police 110; Ambulance 119; Fire 119.

TELEPHONES: No telephone installation service on board.

SHORE LEAVE: Local Immigration offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

SERVICES: All navigational apparatus can be served, as requested, but technicians are to be sent from Kobe.

REGULATIONS: Quarantine Anchorage is outside harbour limits therefore (i) no persons allowed ashore from this anchorage, (ii) No supplies permitted to vessels and, (iii) No Agency services available.

AUTHORITY: Okayama-Kencho.

AGENT: Sub-agent of Dodwell & Co. Ltd., Tokyo. Naigai Unyu Co. Ltd., 1, 2-chome, Kaigan-Dori Mizushima, Kurashiki-Shi Okayama-Ken. Cables: Naigai Kurashikimizushima. Tel. Kurashiki (0864) 44–5211.

MOJI (Kitakyushu): 33.54 N. 130.58 E. (See Kanmon-Ko)

DOCUMENTS: When ship arrives direct from foreign port, customs officials will board vessel for search. Following documents to be submitted:

Crew List.
Passenger List.
Store list.
Manifest of crew personal effects (must be signed by individual crew member).
Arms and ammunition list.
Narcotics List.
List of ports of call on current voyage.
Discharging Cargo Manifest.
Through Cargo Manifest.
Declaration inward/outward (Form No. C2000).

The following will be checked on board:
Ship's Registry.
Last Port Clearance.

When ship comes from Japanese port, Customs Officials will not attend on board, except special case. Master or Agent to attend Custom House for entry formalities with following documents:
Discharging Cargo Manifest.
Through Cargo manifest.
Declaration inward/outward.
Ship's Registry.
Last Port Clearance.

Documents entrusted with the Master by Customs at previous port. On ship's departure, clearance issued by Customs, after confirming payment of tonnage dues.

ANCHORAGE:

	Depth	*Capacity (g/t)*
Tanoura	9.1 m.	20,000 tons×2

(No. 2 anchorage: 83° from Mojisaki light buoy, 1,770 m.)
(No. 3 anchorage: 80° from Mojisaki light buoy, 2,300 m.)

WIND, TIDE: Easterly winds prevail in warm seasons. North-westerly winds prevail in Winter season. Dense fog frequently prevails in Spring and Autumn.

Tidal range 3.07 m. Current near entrance of port runs Westward at flood and Eastward at ebb. Speed of current in vicinity of narrowest section of Straits sometimes reaches 7-8 knots. In stream of port, it is about 3-5 knots.

RESTRICTIONS: *(a)* Berthing: During daytime only. Swift tidal current prevails at buoy berths necessitating strong moorings, and in accordance with harbour rules, ships moor with anchor chains to buoy. Requisite chain preparations should be completed before ship leaving Pilot station. Occasionally large vessels drawing deep draft made to await high water and/or suitable current to berth alongside wharves.

(b) Departure: with adequate notice, no restrictions from anchorage and/or buoys. Night departure from wharves generally practicable, except when Pilot disagrees to ship-out; this will depend upon conditions of weather, tide, etc.

(c) Tug assistance may be required at Pilot's discretion for large vessel mooring to and/or unmooring from buoy, depending upon efficiency of engine and conditions of weather, tidal current, etc.

(d) Maximum draft to enter and passing through Kanmon Straits limited to 10 m.

MAX. SIZE:

Name of berth	*Length* m.	*Depth* m.	*Permissible draft and length overall* m.	*Capacity* g.t.	
Moji Wharf (public)					
No. 1 (No. 1–2)	450	8.7	8.5	15,000	
2		9.1	9.0	15,000	
3 (No. 3–7)	877	9.3	9.3	15,000	
4		9.3	9.3	15,000	
5		9.1	9.0	15,000	1×crane for grain cargo
6		9.3	9.3	15,000	
7		9.1	9.0	15,000	
8 (No. 8–9)	390		9.2	12,000	
9			9.2	12,000	
10	220	9.1	9.0	9,000	
11	195 (180)	9.0	9.0		
12 (No. 12–13)	345	8.6	8.5	15,000	2× pneumatic suckers
13		9.4	9.3	15,000	2× pneumatic suckers
Moji Buoy					
No. 1		10.1	9.6	15,000	
2		10.1	9.6	15,000	
3		9.4	9.3	15,000	
4		9.6	9.0	15,000	
5		—	—	—	
6	(160)	13.0	10.0	15,000	
7	(160)	13.0	10.0	15,000	
8		9.7	9.0	15,000	
9		9.5	9.3	10,000	Only usable when tidal current is under 5 knots
Tanoura Wharf					
No. 1	105	9.0	9.0		Banana centre
2	105	9.0	9.0		
3	185	10.0	9.6		Container berth
4	220	10.0	9.6		
5	170.4		9.0	10,000	
6	170.3		9.0	10,000	
7	181.1	9.0	9.0	10,000	
8	185	9.0	9.0	10,000	
Tanoura Anchorage No. 2 and 3		9.1	9.1	20,000	
Tanoura Buoy No. 1		9.1	9.1		
Tanoura Oil Berth (dolphin) (Mitsui Bussan and M-Iida Wharf)		9.1	9.1	33,000	

Tachinoura Wharf (public). Approximately 7 berths with depth of water between 10 and 12 m. under construction, No. 2 and 3 wharves completed, permissible draft 9.6 m.

Tankers: 1 tanker berth, Mitsui & Co. Berth "B". Max. d.w.t. 33,000 tons. Max. LOA, 200 m. Max. safe draft 9.10 m.

PILOTAGE: (1) *Harbour pilotage* compulsory for entry and departure, but not when vessel passing through Straits. Pilots embark East-bound vessels at Mutsure Quarantine Anchorage position half mile East Mutsure L.H. 33° 58′ 15″ N. 130° 53′ 43″ E. and West-bound vessels at Hesaki Quarantine Anchorage position 125°, 1,500 m. from Hesaki L.H. 33° 56′ 24″ N. 131° 03′ 12″ E. Two Pilots embark vessels exceeding 30,000 gross tons for entry and departure charging double pilotage.

(2) *Sea pilotage:* Vessels approaching from East can obtain Pilots by radio request made at least 24 hours in advance. Pilot embarks at position 3 miles South from Sekisaki L.H. 33° 13′ 00″ N. 131° 54′ 00″ E.

(3) Pilots should be kept closely advised of vessel's accurate ETA at pilot station. If any change in vessel's movements, Master requested to immediately communicate by radio or VHF to pilot offices directly or through Agent reporting revised ETA. Cable addresses of pilot offices are: Harbour Pilot "Kanmonpilot Moji", Inland Sea Pilot "Anjin Moji".

(4) *VHF:* Vessels keep in direct contact with port authorities with regard to arrival, berthing instructions and Pilot's requirements through VHF as follows:

(a) Call sign: Kitakyushu Port Radio (or Shimonoseki Port Radio).
(b) Location of Radio facilities: Transmitting and receiving station located at the top of Mt. Hinoyama, Shimonoseki.
(c) Type of wave: Channel: Simplex 16 (calling, responding); Simplex 12 (communicating); Simplex 14 (communicating); Duplex 20 (communicating). Output 50 W.
(d) Operating hours: 00.00–24.00 hrs.
(e) Communicating range: within a radius of 50 miles from the Hinoyama Station.
(f) Communicating language: Japanese/English.

HEALTH: Radio Agent for free pratique not less than 12 hours and not more than 36 hours before arrival, advising full details of vessel and health conditions on board. When free pratique is granted by radio vessel will be required to submit the following documents to Quarantine Officer on arrival:
Maritime Declaration of Health.
Crew List.
Passenger List.

The following vessels will not be able to get radio pratique:

A vessel that has been in contact with an infected area or a suspected infected area within 15 days of arrival.

If a vessel has on board any case, or any suspected case of infectious disease, within 15 days of arrival.

If crew or passengers on board do not possess Valid Smallpox Vaccination Certificates.

If a vessel does not possess a valid Derat or Derat Exemption Certificate.

(a) Quarantine Station at Western entrance: half mile East from Mutsure lighthouse 33° 58′ 15″ N., 130° 53′ 43″ E.

(b) Quarantine station at Eastern entrance: 125 degrees, 1,500 metres from Hesaki lighthouse 33° 56′ 24″ N., 131° 30′ 12″ E.

(c) Quarantine inspection not allowed inside port except when weather or other special reasons prevent quarantine boat from approaching ship at anchorage.

(d) "Q" flag should be hoisted until ship is in free pratique.

(e) Vessels exceeding 20,000 gross tonnage may undergo quarantine on application when they berth inside port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically West bound vessel to Choshi and North bound to Nagasaki Radio respectively.

TUGS: Normally join vessel at adequate position in judgment of pilot and tug for mooring. In operation, tug's line to be used for mooring and unmooring without any charge.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew.

Average loading/discharging:

Bulk cargo:	Coal	50 t.p.h./gang/hatch (dis)
	Iron ore	45–50 t.p.h./gang/hatch (dis)
	Grain	50 t.p.h./gang/hatch (dis)
Baled cargo:	Cement	50 t.p.h./gang/hatch (load)
	Fertilisers	40 t.p.h./gang/hatch (load)
	Grain	30–50 t.p.h./gang/hatch (load)
	General	40 t.p.h./gang/hatch (load)
Steel cargo:	Under 20 ft. long	25–30 t.p.h./gang/hatch (load)
	Over 20 ft.	15–20 t.p.h./gang/hatch (load)
Scrap steel:	Pressed	20 t.p.h./gang/hatch (dis)
	Ordinary	10 t.p.h./gang/hatch (dis)
	Bulky and awkward	5 t.p.h./gang/hatch (dis)
Lumber/logs:	Lumber	15–20 t.p.h./gang/hatch (dis)
	Logs	30 t.p.h. gang/hatch (dis)

2 shifts; 0800 to 1700 hrs. and 1800 to 0500 hrs. Normal working hours 0800 to 1700 hrs. Overtime work is possible by applying to Customs. No work can be arranged on 31st December and during New Year holidays (1st to 3rd Jan.). No work on 1st and 3rd Sunday of each month.

MEDICAL: No advance notice required unless urgent.

TANKERS: No slop discharge facilities. Mobil Oil berth situated at Okubo, near Tanoura. At vicinity of berth, the current runs towards West nearly all the time. Maximum rate of current 3 knots. Vessels berthed during period that tide sets to West, in day-time only. Mooring berth consists of 1 oil pier (length 80 m. width 5 m.) and 2 dolphins. Two 10-in. pipes connected to vessel; discharge rate 1,000 t.p.h.

FRESH WATER: Good fresh water supplied from water barges to vessels lying at buoys and/or anchorage; from hydrants to those alongside wharves. The rate of delivery per hour is 20–40 tons from hydrant and 50 tons from barge.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.

Bonded bunker oil is supplied by oil barges. The rate of delivery: 80-100 t.p.h.

Suppliers	*Delivery agents*	*Installation*	*Required notice days*
Shell Sekiyu K.K.	Uyeno Unyu.	Shimonoseki	1
Esso Oil Co.	General Bussan	Mutsure	1
		Sakai	4
Mobil Oil Co.	Nisshin Tanker	Kokura/Moji	1
		Oita	2–3
Caltex Oil Co.	Shimazu Kaiun	Shimonoseki	1
		Kudamatsu	2
Mitsubishi Shoji Kaisha	Nisshin Tanker	Mutsure	1
	Asahi Tanker	Iwakuni	3
	Tsurumi Yuso	Kanokawa	3
C. Itoh & Co.	Asahi Tanker	Matsuyama	3
	Chikko Kogyo	Mizushima	3
Nissho Co.	Nisshin Tanker	Mutsure	1
	Tsurumi Yuso	Matsuyama	3
Mitsui & Co.	Chikko Kogyo	Oita	2–3
Nippon Mining Co.	Nippon Tanker	Mizushima	3
Idemitsu & Co.	Nagai Kaiun	Tokuyama	2
Sumitomo Shoji Kaisha	Asahi Tanker		
Marubeni-Iida Co.			
Kanemusu-Gosho Co.	Nagai Kaiun	Kokura	1
	Asahi Tanker	Tokuyama	2

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommended request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore, but no spirits.

CONSULS: Honorary British Consulate concurrent with Honorary Swedish Consulate.

REPAIRS: Mitsubishi Heavy Industries, Ltd. Shimonoseki; Daiki Industries Co., Ltd. Moji; Kitakyushu Iron Works, Tobata.

DRY DOCKS: Refer "Shimonoseki".

REPATRIATION: Possible.

AIRPORT: Distance to Kitakyushu airport: 30 minutes by taxi and to Fukuoka airport; 2 hours by train and taxi.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police station (tel. 110) and Fire/Ambulance (tel. 119).

TELEPHONE: Telephone placed on board.

SERVICES: All services available, including hold cleaning and grain fitting.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days; but 3 days extension possible if ship stays longer. Immigration Officials board vessel on her arrival in port to examine passports, discharge books and/or other equivalent travel documents and provide 72-hour landing passes for crew members and passengers. One copy each of crew list and passenger list are required by them. Providing ship's Agent with a crew list beforehand will be a great help in expediting immigration business on ship's arrival. When ship stays in port more than 72 hours, the landing passes may be extended every 72 hours on application. In the event that crew members, without entry visas, are to be landed for repatriation or transfer, Immigration will not permit their landing unless passage, by either sea or air, ensuring the prompt departure from Japan (within 72 hours) of these men, has been booked, or unless the ships to which they are to be transferred, arrives in Japan within 5 days.

AUTHORITY: Kita-Kyushu Port Authority.

AGENT: Sub-agents of Dodwell & Co. Ltd., Tokyo. Holme Ringer & Co. Ltd., PO Box 72, 9-9, Minato-merchi, Moji-Ku, Kitakyushu. Tel. Moji (093) 331-1311. Telegraphic "Ringer Moji".

MURORAN: 42.20 N. 140.58 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare 2 Inward/Outward Declarations, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Arranged by Agent subject receipt of ETA advice at least 24 hours prior arrival. Pilot boards vessel about 1 mile outside breakwater. Not compulsory.

ANCHORAGE: Outside harbour limits: Subject notice having been given to Authorities prior arrival. Inside harbour limits: Permitted in any part.

MAX. SIZE: *Nissei Pier (Nippon Petroleum):*

Max. d.w.t.	*Max. LOA*	*Max Safe Draft*
*50,000	220 m.	10.80 m.
*30,000 (g.t.)		
100,000 Sea Berth (Under construction)	390 m.	16.00 m.

*For vessels of deadweight tons, gross tons and LOA in excess of above limits it is necessary to obtain entry permission from the Harbour Master, Pilot and the Refinery in advance.

Ore Carriers: Max. LOA, 300 m., max. draft, 16.0 m.

HEALTH: Vessels usually anchor at the sea area within a circle of radius 1,000 m. – directed 290° 4,200 m. from Daikokujima Lighthouse, where the authorities board and grant free pratique. Radio pratique also available.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which covers all ports in Japan. If specifically West bound vessel to Choshi, and North bound to Nagasaki Radio respectively.

TUGS: 10 tugs, up to 3,200 h.p. Usually meet vessel near Inner Harbour breakwater. 10% additional charge if tug's lines used.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Capacity (d.w.t.)*	*Shore Cranes*
Nippon Petroleum					
Nippon Sea Berth	370	16.5	16.0	100,000	"See Tankers"
Nippon Wharf (with dolphin)	67	11.0	10.8	20,000	
Motowanishi Wharf	176	10.2	9.7	12,000	1× 5 tons
Nippon Steel					
Wharf (A)	742	9.0	8.5	12,000	3× 3 tons
Wharf (B)	400	9.0	8.5	15,000	4× 8 tons
Nippon Steel (iron ore)	250	14.0	14.0	35,000	2×15 tons
Nippon Steel (iron ore)	300	16.5	16.0	160,000	1×21 tons
Nittsu Pier	150	9.0	8.5	10,000	2× 5 tons
Centre Pier	310	8.5	8.0	10,000	NIL
West Pier (No. 2)	360	9.0	8.5	10,000	NIL
Nikko Pier	185	8.0	7.5	7,000	NIL
Sakimori Wharf	185	10.0	9.2		1×10 tons

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent. Hospital facilities available.

TANKERS: See "Max. Size". N.P.R.C. Muroran Refinery. Discharge berth. About 25% of deadweight required in ballast.

Berth	*Product*	*Pipe-line*	*Discharge Rate*
50,000 d.w.t.	Crude Oil	1×12 in. 1×10 in.	4,000 k/l
30,000 g.t.	Fuel Oil	1×14 in.	1,500 k/l
	Diesel Oil	1×10 in.	1,200 k/l
100,000 d.w.t.	Crude Oil		5,000 k/l

DENSITY/TIDE: Density 1025. Rise and fall of tide about 4 ft.

FRESH WATER: Delivery at piers: Average rate about 40 t.p.h. Delivery by barge: Rate about 60 t.p.h.

FUEL: Available.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Only minor repairs available, but Hakodate dockyard able undertake all grades repairs.

AIRPORT: Domestic flights only from Chitose Airport – 100 km. from Muroran.

TIME: GMT plus 9 hours. Permanent.

POLICE/FIRE: Police Muroran 2-5191; Fire Muroran 2-2111.

TELEPHONES: May only be connected on board at No. 2–2 West Pier.

SHORE LEAVE: Local Immigration offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port and Harbour Bureau.

AGENT: Sub-agent of Dodwell & Co., Tokyo. Narasaki Sangyo Co. Ltd. 3–2, 3-chome, Kaigan-Cho, Muroran-shi, Hokkaido. Tel. Muroran (0143) 24-1314/6. Telegraphic "Narasaki Muroran".

NAGASAKI: 32.45 N. 129.52 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport/Seaman's Book Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory, but necessary unless Master well acquainted with locality. Pilot embarks in vicinity of Ioshima lighthouse, Lat. 32° 43′ 20″ N., 129° 46′ 43″ E. Pilot available any time, subject to adequate notice (no VHF system). All communication with Pilot through Agent. Pilot boat carries International signals. "G" flag in day-time and "Morse" signals at night to call Pilot. In event bad weather Pilot boards at anchorage off Megami.

ANCHORAGE: Megami anchorage located in Harbour Division No. 3 (within line between Kagenoo lighthouse and West end of Shirogashima) 60 ft. depth and capacity of 3 vessels of 20,000 d.w.t. Safe anchorage.

RESTRICTIONS: Berthing: During day-time only, except for emergency purposes. Entering into anchorage at Megami is generally permitted anytime with Harbour Master's permit. Departure: No restriction from buoy or wharf with adequate notice, but no night departure from Oil Terminals, except Hawashikane Oil Terminals of Doinkubi and Kozaki.

MAX. SIZE: Max. permissible length 1,200 ft., breadth 120 ft., draft 15.0 m.

Tankers:

Berth	*Max. d.w.t.*	*Max. LOA*	*Max. Safe Draft*
Hayashikane Oil Co. (Kozaki Depot)	42,000	—	10.00 m.
Hayashikane Oil Co. (Dinokubi Depot)	30,000	230 m.	15.00 m.
Mobil Oil Co. (Kibachi Depot)	22,000	200 m.	11.00 m.
Idemitsu Kosan (Kibachi Depot)	22,000	200 m.	11.00 m.
General Sekiyu (Otao Depot)	20,000	230 m.	15.00 m.

HEALTH:

(a) Quarantine station: Sea area surrounded by the following lines:

1. From Senbonyama beacon to Megami beacon.
2. From Megami beacon to Naginata lighthouse.
3. From Senbonyama beacon to Takaboko Island.

(b) Quarantine service is rendered from sunrise to one hour before sunset.

(c) Radio pratique is effective.

RADIO: Recommended Captain communicates with Agent through Chosi Radio or Nagasaki Radio which cover all ports in Japan. If specifically West bound vessel to Choshi and North bound to Nagasaki Radio respectively.

TUGS: Tugs normally join vessel at anchorage for swinging and/or at berth for assisting vessel. Tugs available: 3,500 h.p. owned by Dokai Tug Co.; 3,000 h.p. owned by Mitsubishi Shipyard; 2,880 h.p. owned by Kowa Kogyo Co.; 2,200 h.p. (2) owned by Kowa Kogyo Co.; 2,200 h.p. owned by Nagasaki Pref. Tug Association.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Wharf	*Length*	*Depth*	*Capacity*	*Crane*
Dejima	413 m.	9 m.	10,000 g.r.t. × 2 vessels	3 tons × 2 2 tons × 1
Yanagi	270 m.	12 m.	46,000 g.r.t. × 1 vessel	
Yanagi	185 m.	10 m.	7,000 g.r.t. × 1 vessel	

Buoy	*Ship's Length (O.A.)*	*Permissible draft*	*Capacity g.r.t.*
Nos. 1 – 2	270 m.	14 m.	105,000 × 1
Nos. 2 – 3	250 m.	14 m.	50,000 × 1
Nos. 3 – 4	200 m.	14 m.	20,000 × 1
Nos. 4 – 5	175 m.	14 m.	6,000 × 1
Otao Nos. 1 – 2	347 m.	21 m.	150,000 × 1
MHI MC–MD	256 m.	10 m.	25,000 × 1

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1630–2130 hrs. 60% additional of basic stevedorage; 2130–0500 hrs. next morning 150% additional; Sundays/holidays 100% additional.

CRANES: *Floating Cranes:* 300 tons owned by Kowa Kogyo Co.; 150 tons owned by Mitsubishi Shipyard; 100 tons owned by Shinko Kogyo Co.; 30 tons owned by Shinko Kogyo Co.

MEDICAL: No advance notice required unless urgent.

TANKERS:

Berth	*Product*	*Shoreline*	*Discharge Rate (t.p.h.)*
Hayashikane Oil Co. (Kozaki Depot)	Fuel Oil	8″×1	500
Hayashikane Oil (Dinokubi Depot)	Fuel Oil	8″×1	800
Mobil Oil Co. (Kibachi Depot)	Fuel Oil	8″×1	400 (Berthed alongside)
Idemitsu Kosan (Kibachi Depot)	Fuel Oil	8″×1 6″×1	400 400
General Sekiyu (Otao Depot)	Fuel Oil	8″×1	700 (Sea Buoy)

A slop discharge station operated by Nishi Nippon Tanker Service located at Ioshima with facilities for tankers up to 500,000 d.w.t. mooring to three 20-ton bollards. Receiving capacity 1,500 cubic metres per hour. The tank cleaning facilities can accept 10 vessels of 200,000 d.w.t. per month.

DENSITY: 1025.

FRESH WATER: Capacity of water barges: 500 tons, 135 tons and 58 tons. 3 barges in total. Rate of delivery: 100 t.p.h. Wharf hydrants at Yanagi and Dejima.

FUEL: Available ex-barge only. 3–5 days prior notice required by oil company.

FIRE PRECAUTIONS: No specific precautions.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore, but no spirits.

CONSULS:

French Consul Agency, tel. 23-1221
Portuguese Honorary Consul Agency, tel. 26-2311

REPAIRS: All types of repair can be carried out.

DRY DOCKS:

	Length	*Width*	*Depth*	*Capacity (g.r.t.)*
Koyagi Dock (MHI)	400 m.	100 m.	14.5 m.	250,000
No. 2 Dock (MHI)	335 m.	54 m.	9.5 m.	165,000
No. 3 Dock (MHI)	268 m.	37.2 m.	8.8 m.	65,000

SURVEYORS: *Classification Survey Association:* Nippon Kaiji Kyokai; Lloyd's Register of Shipping; American Bureau of Shipping; Norske Veritas; Bureau Veritas.

Cargo Survey Association: Nippon Kaiji Kentei Kyokai.

REPATRIATION: Possible.

AIRPORT: Distance 54 km. (centre of town to air terminal). Time 1.5 hrs. by car. All Nippon Airway have regular daily service with 7 flights for Tokyo and Osaka, and Towa Domestic Airway have regular daily service with 1 flight for Tokyo.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police 22-2141; Ambulance/Fire 22-3211 (Fire station).

TELEPHONE: Shore telephone can be installed on board vessel at both wharves of Yanagi and Dejima. Vessels at Mitsubishi Yards can communicate via shipyards' switchboard with town.

SHORE LEAVE: Local Immigration Officers issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Nagasaki Port Authority.

AGENT: Sub-agents of Dodwell & Co. Ltd., Tokyo, Nagasaki Warehouse Co. Ltd., 2–13, Dejima-Machi, PO Box 6, Nagasaki. Tel. Nagasaki (0958) 24–1261. Telegraphic "Nagasoko Nagasaki" Telex: 752322.

NAGOYA: 35.05 N. 136.53 E. (See Plan Book)

Situated at northern head of Ise Bay. Harbour protected by breakwater 8,250 m. in length stretching from Chita peninsula to bank of Kiso River at opposite side of harbour.

DOCUMENTS: *(a)* Quarantine (only when arriving from a foreign port); Maritime Declaration of Health, 1 Crew List, 1 Cargo Manifest, 1 List of Passengers (if any on board), Log Book and Registry should be readily available. *(b)* Customs: 1 Declaration Inward/Outward with ports of Call, 1 Ship's Registry, 1 Last Port Clearance, 1 Store List including arms and narcotics, 2 Manifests of Cargo for day charge (prepared by Agents), 1 Manifest of Through Cargo, 1 Crew List, 1 List of Passengers, 1 List of Crew's Baggage (only necessary if crew-members have to land personal effects ashore). *(c)* Immigration: 1 Crew List, 1 Notification of Arrival, Application for Shore-passes, 1 List of Passengers, 1 Notification of Departure (to be returned through Agents after sailing). *(d)* Harbour Master: 1 Crew List, 1 Declaration Inward/Outward with ports of Call. *(e)* Port Authority: 1 Declaration Inward/Outward with ports of Call.

PILOTAGE: Request Pilot and other services to JHY (Nagoya Port Radio Station) at least 5 or 6 hours prior arrival on frequency 500 KHz. JHY keeps watch also on 480 KHz. Pilot station near No. 1 and No. 2 channel buoys at entrance of harbour channel. When wind over 15 m/sec. Pilot boards inside High tide Breakwater. When very rough, Pilot taken on board East side of Kinjo Signal Station. Pilot not compulsory but desired. Pilot boat white painted with white and red funnel and letters "Pilot" on hull.

ANCHORAGE: The port boundary indicated by line connecting Oono Lighthouse (34° 55′ 49″ N., 136° 49′ 28″ E.), Ise Bay Light Buoy (34° 56′ 05″ N., 136° 47′ 44″ E.), Southwest corner of Nagoya High tide Breakwater (35° 1′ 54″ N., 136° 47′ 04″ E.) and the base point at Northwest of the same Breakwater (35° 00′ 54″ N., 136° 46′ 09″ E.). Quarantine Anchorage, located outside High tide Breakwater offers safe anchorage for vessels awaiting Pilot or quarantine service. Depth this anchorage area ranges from 10 to 20 m. Sea bed silty clay.

MAX. SIZE:

Tankers:

Berth	*Max. d.w.t.*	*Max. LOA*	*Max. Safe Draft*
Nisseki Terminal	34,000	195 m.	9.80 m.
Esso Standard	34,000	195 m.	8.80 m.
Maruzen Standard	20,000	80 m.	9.50 m.
Kanematsu-Gosho	34,000	200 m.*	9.50 m.
Mitsui	34,000	195 m.	9.50 m.
Mitsubishi Shoji	34,000	190 m.*	9.50 m.
Chita Futo	50,000	210 m.	11.70 m.
Idemitsu Chita Pier	100,000	—	14.00 m.
Nishi Nagoya Yusosho	30,000	200 m.	11.70 m.
Isewan Sea Berth	200,000	—	26.00 m. (Depth)
Toa Kyoseki	100,000	220 m.	14.00 m.

NB—Limitation 30,000 d.w.t. These lengths available when no vessel secured to neighbouring (RYNORU) berth.

Other vessels: 160,000 d.w.t., draft 14.0 m.

HEALTH: Radio Agent for free pratique not less than 12 hours and not more than 36 hours before arrival, advising full details of vessel and health conditions on board. When free pratique is granted by radio vessel will be required to submit the following documents to Quarantine Officer on arrival:

Maritime Declaration of Health.

Crew List.

Passenger List.

The following vessels will not be able to get radio pratique:

A vessel that has been in contact with an infected area or a suspected infected area within 15 days of arrival.

If a vessel has on board any case, or any suspected case, of infectious disease within 15 days of arrival.

If crew or passengers on board do not possess valid Smallpox Vaccination Certificates.

If a vessel does not possess a valid Derat or Derat Exemption Certificate.

RADIO:

JHY (Nagoya Port Radio Station). Service area: 100 miles. Frequency: 500 KHz. (also 480 KHz.). Working frequency: 486 KHz. *International VHF (Nagoya Port Radio).* Service area: 40 miles. Frequency: Simplex working frequencies Channels 12 and 16. Duplex working frequencies Channels 18 and 20.

To be given prior arrival: Name; Capacity; draught and length; Port of departure; Last port; Time arrival outer port; time passing Kamishima Signal Station; Grade of cargo; Grade of dangerous cargo (if any); Health of crew.

TUGS: Usually join at point where vessel directs course toward allocated berth. Tug's lines normally used without charge.

MEDICAL: Hospitals conveniently located near port.

BULK HANDLING FACILITIES: Kinjo Container Terminal has 2 berths with a depth of water 10.5 m., overall berth length of 400 m. Coal pier can accommodate ships up to 10,000 tons. Depth of water 9 m.

Nippon Steel Corp., has 1 berth for handling of iron ore with 350 m. long wharf and a depth of water 14 m., 2 berths for ore and/or coal with a 500 m. long wharf and a depth of 13 m., 1 berth for scrap iron with 140 m. wharf and a depth of water 13 m.

Grain handling facilities include Wharf No. 8, 173 m. long and 10 m. deep. Tohama Wharf 135 m. long and 10 m. deep. Nisshin Wharf 150 m. long and 12 m. deep. Tokai Silo Wharf 190 m. long and 14 m. deep. Toyo Grain Wharf 170 m. long and 13 m. deep. Chita Futo Wharf 160 m. long and 12 m. deep.

TANKERS: 53 oil tanker berths over 1,000 tons including 2 offshore berths (Sea Berth) of depth: 26 m. for 200,000 ton tankers.

Berth	*Product*	*Shoreline*	*Pumping rate (t.p.h.)*
Nisseki Terminal	Diesel Oil	8″×1	600
	Fuel Oil	12″×2	1,000
Esso Standard	Diesel Oil	6″×1	700
	Fuel Oil	6″×2	700
Maruzen Standard	Diesel Oil	4″×1	150
	Fuel Oil	8″×1	500
Kanematsu-Cosho	Diesel, Fuel	8″×1	1,000
Mitsui	Diesel Oil	6″×1	700
	Fuel Oil	6″×1	700
Mitsubishi Shoji	Fuel Oil	8″×1	1,000
Chita Futo	Diesel, Fuel	8″×1	1,000
Idemitsu Chita Pier	LPG/Crude	20″×4	2,000
Nishi Nagoya Yusosho	Fuel Oil	12″×1	1,000
Isewan Sea Berth			18,000 k/l
Toa Kyoseki	Crude	Free size×4	2,000

DENSITY: 1020.

WATER: Water supplied direct from pier.

FUEL: All grades fuel available. Delivered by barge only.

DEVELOPMENTS: Main Channel 14 m. deep and 350 m. wide will be enlarged to 17.5 m. deep. Secondary Channel 10 m. deep and 300 m. wide will be dredged to 12 m. deep and 400 m. wide.

Anchorage area 9 m. deep at present will be deepened to 10 m.

Kinjo Pier Development: 14 berths with 10 m. will be constructed.

CONSULS: The following countries are represented in Nagoya: Ecuador, France, Netherlands, Korea, Mexico, Portugal, Sweden, Thailand.

GANGWAY/DECK WATCHMEN: Not compulsory but recommended.

OPENING/CLOSING HATCHES: Normally carried out by crew. When stevedores do this work charges are made.

CUSTOMS ALLOWANCES: For crew (per landing): 60 cigarettes, 1 bottle of spirit when sailing period exceeds one month, 2 bottles over three months.

For passengers: 3 bottles of spirit; 200 cigarettes or 50 cigars; 2 ounces of perfume; 1 watch of which price is not over Y30,000; other items of which total price is under Y100,000.

CREW IDENTIFICATION CARDS: Required.

REPAIRS: All types repairs possible. Repairs by Ishikawajima-Harima Heavy Industries Co. Ltd., Nagoya Shipyard.

DRYDOCKS: Ishikawajima-Harima Heavy Industries Co. Ltd., Nagoya Shipyard: Length 150 m., width 24.2 m., capacity 13,000 g.r.t.

Chita Shipyard of Ishikawajima-Harima Heavy Industries Co., Ltd. (IHI), length 810 m., width 92 m., capacity 250,000 g.r.t.

AIRPORT: Nagoya Airport, 20 kilometres from Port. 3 JAL (Japan Air Lines) flights for Hong Kong, 2 flights for Manila (weekly), 3 JAL flights to Seoul and 3 KAL flights to Seoul.

HOLIDAYS: National Holidays: New Year's Day (Jan. 1st), Adults Day (Jan. 15th), Foundation Day (Feb. 11th), Vernal Equinox Day (Mar. 21st), Emperor's Birthday (Apr. 29th), Constitution Day (May 3rd), Children's Day (May 5th), Respect for The Aged Day (Sept. 15th), Autumnal Equinox Day (Sept. 23rd), Health Promotion Day (Oct. 10th), Culture Day (Nov. 3rd), Labour Thanksgiving Day (Nov. 23rd). Cargo handling not arranged on December 31st, January 1st, 2nd and 3rd, and July 20th (Maritime Day).

TIME: JST (Japan Standard Time), 9 hours ahead of GMT.

POLICE/AMBULANCE/FIRE: Police 110, Ambulance 119, Fire 119.

TELEPHONES: Telephone can be arranged on board ships berthed at most wharves. For application call 652-7581. Telegram 971-4222, Time 117, Weather 177.

AUTHORITY: Nagoya Port Authority.

AGENT: Sub-agent of Dodwell & Co.. Goyo Kaiun Kaisha Ltd. 3-4, Irifune 2-chome Minato-ku, Nagoya-shi Aichi-ken. Cable Address; "Shipgoyoh Nagoya". Domestic Telex: 446-3113 SPGOYO J. Telephone No.: (052) 651-5171.

NAHA, Okinawa: 26.12 N. 127.40 E. (See Plan Book)

DOCUMENTS:

Ship's Register.

Last Port Clearance.

3 Crew Lists, including passport numbers.

3 Passenger Lists.

1 Stores List.

1 Declaration of Crew's Baggage, i.e. tobacco, wines/spirits, camera, wrist-watch, radio, firearms/swords, etc. (Only at first port of call in Japan.)

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest, Cargo Manifest in transit using specific forms. Therefore Ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Pilot services compulsory. Pilot boards in position 26° 13′ 49″ N. 127° 38′ 20″ E. International Pilot signals used.

RESTRICTIONS: Vessels entering Naha Port are controlled by the limiting depth in the entrance channel of 9.6 m. Entry possible daylight only.

MAX. SIZE: Length and beam not limited. Max. draft 9 m.

HEALTH: Radio pratique possible. Formalities will be carried out at the dock side.
RADIO: Recommended communicate with Agent through Choshi Radio or Nagasaki Radio, which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio, respectively.
TUGS: 6 tugs available, 210-3,000 h.p.
BERTHING:

Berth	Length (m.)	Depth (m.)	
North Side			
A	33.5	4.5	
B	152.5	4.5	
D	121.5	4.5	(Tanker & barge bunkering)
F	198.0	7.5	(Gen. cargo/black oil)
G	193.0	8.5	(Gen. cargo/black oil)
I	68.5	9.0	
South Side			
No. 1	175.0	9.5	Military Port
No. 2	152.5	9.5	
No. 3	152.5	9.5	
No. 4	152.5	9.0	
No. 5	152.5	9.5	
No. 6	152.5	9.5	
No. 7	183.0	9.5	
No. 8	61.0		
No. 9	152.5		
No. 10	152.5	4.4	

Naha Shinko (New port)

Berth	Length (m.)	Depth (m.)	Number of Berth
No. 2	70	5.0	1 berth
No. 3	420	7.5	3 berths
No. 4	420	7.5	3 berths
No. 5	420	11.0	2 berths
No. 6	450	11.0	2 berths

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores.
MEDICAL: All medical and hospital facilities available.
TANKER: Two berths for tankers at North side of commercial port.
Berth F—7.5 m. depth alongside.
Berth G—8.5 m. depth alongside.
FRESH WATER: Available at the berths at a rate of 20 t.p.h.
FUEL: Fuel oil No. 5 and diesel oil are available ex-wharf at a rate of 2,000 bbls. per hour.
OPENING/CLOSING HATCHES: Stevedores will carry out this work. Cost per gang according to type of cargo. Recommend stevedores for this work unless crew can complete it before berthing.
CUSTOMS ALLOWANCES: Each man allowed take 50 cigarettes ashore, but no spirits.
REPAIRS: Facilities available for minor repairs. One 100 ton floating crane owned by U.S. Army.
TIME: GMT plus 9 hours all year round.
SHORE LEAVE: Local immigration office issues shore pass valid for three days, but extension possible if ship stays longer.
AUTHORITY: Naha Trade & Commerce Bureau.
AGENT: Sub-agent of Dodwell & Co., Connell Bros. Company, Ltd., PO Box 57, Naha, Okinawa. Cable address "Seabsea Naha". Telex J 79822. Telephone (0988) 57–0391–95.

NAOETSU: 37.11 N. 138.14 E.

DOCUMENTS:

1 Inward Declaration of Vessel.
1 Cargo Manifest.
1 Through Cargo Manifest.
1 List of Provisions and Stores.
1 List of Tobacco and Personal Effects.
7 Crew Lists (preferably airmailed in advance).
2 Passenger Lists.

PILOTAGE: Pilot embarks at quarantine anchorage to take vessel directly to berth during daytime. All transmitting and receiving through Niigata Radio Station (call sign JCF, Type of Wave: 438454) or Choshi Radio Station and/or Nagasaki Radio Station. Cable Agent one week's notice of ETA and accurate ETA 24 hours before arrival, thereafter advising any change in arrival time. No Pilot boat. Pilot uses tug-boat.
ANCHORAGE: Half-circle drawn at a point of 37° 11′ 31″ N., 138° 13′ 59″ E. (lighthouse) with radius 1,600 m.
RESTRICTIONS: Berthing and unberthing daytime only.
MAX. SIZE: LOA 160 m. draft 9.50 m. in Summer, and 9.00 m. in Winter.
HEALTH: Radio pratique available. Formalities will be carried out at the anchorage. Quarantine Station 321° – 2,200 m. (Latitude 37° 11′ 45″ N., Longitude 130° 14′ E. 700 m. radius) from Naoetsu Lighthouse.
RADIO: Niigata Radio Station: JCF. Nagasaki Radio Station: JOS. Choshi Radio Station: JCS.
VHF: Channel 16.
TUG: Normally joins vessel at entrance of port. Ship's lines used. One tug 750 h.p. One tug 1,800 h.p. will be brought from Niigata when required.

BERTHING:

Berth	Length (m.)	Depth (m.)	Permissible Draft (m.)	Capacity (d.w.t.)	Remarks
West Wharf No. 1	185	10.0	8.9	15,000	1 Unloader
West Wharf No. 2	185	10.0	8.9	15,000	2 Tower Cranes
South Pier No. 1	105	6.0	5.5	3,000	
South Pier No. 2	105	6.0			Passenger Boat Station
South Pier No. 3	128	6.0		1,500	
South Pier No. 4	120	4.5			Fishing Boat Station
Centre Pier No. 1	130	7.5	7.0	3,000	
Centre Pier No. 2	185	10.0	8.9	15,000	
Lumber Pier	185	10.0	8.9	15,000	
East Pier No. 1	185	10.0	9.0	15,000	
East Pier No. 2	185	10.0	9.0	15,000	
East Pier No. 3	185	10.0	9.0	15,000	
Tanker Berth N	105	6.0		3,000	
Tanker Berth L	150	6.0		2,000	

STEVEDORES: ETA, draft and hatch cargo quantities to be advised before arrival. Main bulk commodities: unloader crane (1) 150 t.p.h.; tower cranes (3) 120–130 t.p.h. and equipment.
MEDICAL: No notice required except in emergency, and attendance on Sundays/holidays.
DENSITY: 1023–1025.
FRESH WATER: Available from shore. 30 t.p.h.
FUEL: Domestic oil is available; Bonded oil will be brought from Moji or Hakodate, with sufficient advance notice.
GANGWAY/DECK WATCHMEN: No professional watchmen available.
OPENING/CLOSING HATCHES: Longshoremen if shipowner guarantees payment of operation charges.
CUSTOMS ALLOWANCES: Tobacco: Each crew member allowed to retain for his private use 200 cigarettes, 50 cigars, 250 grams of tobacco, etc. Wine/and/or Spirits: 1 bottle of liquor, to last one week.
IDENTIFICATION CARD: Passport and/or seaman book required.
CONSULS: None.
REPAIRS: Minor repairs only.
REPATRIATION: Necessary documents to be submitted to Immigration and Customs Authorities in Naoetsu.
AIRPORT: Niigata. 2.5 hours by train. One flight per day to Tokyo.
TIME: GMT plus 9 hours. Permanent.
HOLIDAYS: No work 31st December and 1st, 2nd and 3rd January. Subject to gang's on other holidays.
POLICE/AMBULANCE/FIRE: Police 110; Ambulance/Fire 119.
TELEPHONE: No facilities for placing telephones on board.
GENERAL: During Winter and bad weather, hire of nylon rope (100 mm.) desirable in order to avoid hull damage. Rope owned by Naoetsu Agency Association. Charge made for use.
SERVICE: Technicians for repair and/or adjustment of radar or wireless despatched from Niigata or Tokyo. Hold and/or tank cleaning operations by shorehands available, however gangs are from Niigata.
SHORE LEAVE: Crews allowed ashore within limit of Joetsu City.
DELAYS: Due to port congestion.
AUTHORITY: Port Administration Office.
AGENTS: Sub-Agents of Dodwell & Co. Ltd., Tokyo. Niigata Rinko Kairiku Unso K.K. 9–11, 2-Chome, Minato-cho, Johetsu-shi, Niigata-ken. Tel. Naoetsu (02554) 43–4207. Telegraphic "Rinko Naoetsu". Telex 3252–468 Naoetsu Kaiun Unso.

NAOSHIMA: 34.28 N. 133.58 E.

PILOTAGE: Not compulsory; Inland-sea Pilots are available at Wada-Misaki or Hesaki (off Moji).
RESTRICTIONS: Daylight berthing and unberthing only.
HEALTH: Radio pratique not available. Vessels usually anchor at Wada-Misaki (off Kobe) or nearest quarantine port, where the authorities board and grant free pratique.
TUGS: None. Tugs from Mizushima are available.
BERTHING: Mitsubishi Metal Wharf: Length 165 m. Depth 10.0 m. Max. draft 10.0 m. Max. size: 20,000 g.r.t.
FUEL: Domestic oil is available; Bonded oil will be brought from Kobe, when required.
FRESH WATER: Water barge will be brought from Okayama, when required. (1×50 tons).
REPAIRS: Small repairs can be undertaken.
AGENTS: See "Tamano".

NIIGATA: 37.54 N. 139.04 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory. Pilot embarks at Quarantine Anchorage (37° 58′ N., 139° 03′ E.) to take vessel directly to berth during daytime. All transmitting and receiving normally effected through Niigata Radio Station (call sign: JCF, Wave: 438454), or Choshi Radio Station and/or Nagasaki Radio Station. Radio ETA one weeks notice and accurate ETA at least 24 hours before arrival. Notify any changes to ETA.

ANCHORAGE: Anchorage is a rectangle located North-west of lighthouse at West breakwater in a distance of 1,600 m. covering an area of about 160,000 sq. m. North 37° 57′ 37″ East 139° 04′ 00″. Depth: 18-24 m. Bottom: fine sand.

Safe Anchoring: Warning and instructions have been given by Niigata Harbour Master to secure safety of vessels anchoring off Niigata Port especially in winter season, when the port is greatly affected by N.W. gale.

1. Vessels anchoring outside the breakwater within the Harbour limit must maintain their position Westside of N.W. line drawn from Niigata Lighthouse (Fl. R. sec. 13 m. 12 miles) and must avoid the vicinity of the mouth of the Shinano River or Showa Oil Co.'s Sea-berth (which is connected with shore facilities by submerged pipe-lines).

2. Vessels anchoring outside the breakwater must maintain their positions in the sea area where the depth of water is 25 m. or more. This rule does not apply to vessels waiting for quarantine inspection and/or Pilot. Vessels under 10,000 gross tons should also keep a sufficient distance from shore.

3. Vessels over 10,000 gross tons with dangerous cargoes or oil anchoring outside the breakwater must advise their positions to the Harbour Master by radio.

4. Vessels anchoring outside the breakwater, must keep a bridge watch unless they are equipped with radio. (According to the governing law, any vessel staying outside the breakwater is treated as a navigating vessel even if she is within the harbour limit).

5. Vessels waiting at anchorage must keep watching weather forecast. In case bad weather is reported, the following necessary actions should be taken; namely, officers on duty, confirmation of ship's position, engines on standby, the use of extra anchors, sheltering, etc.

6. In case a vessel requires shelter from N.W. wind in Winter, it is suggested that such vessel proceed to Sado Island and anchor off Morotsu Port, Akadomari Port, Sado Island South Coast or Sado Channel.

7. When approaching the entrance of the port, a vessel can be drawn too close to the East Breakwater or the shallows existing East of the port entrance by force of N.W. gale, N.E. current and river flow. Therefore, vessel must enter from N.W. of Niigata Lighthouse, approaching from Quarantine Anchorage and alter course as West Breakwater Lighthouse and Niigata Port Light Beacon are seen in a line. It is dangerous for vessel to anchor at any areas East of Shinano River.

8. Prior to arrival, Japanese Charts No. 1155A, 122 and 1197 or substitutes should be provided on board. Charts 1181, 1198 may also be needed.

RESTRICTIONS: Berthing and unberthing daytime only. Entry and/or departure at time authorised by Port Authority. Shinano fairway from port entrance to Rinko wharves, depth 11 m. to 12 m.

MAX SIZE: *Tankers:*

Berth	*Max. d.w.t.*	*Max. LOA*	*Max. Safe Draft*
Nisseki Dolphin	36,000	210 m.	10.40 m.
SBM (Sealine Buoy)	120,000	—	21.00 m.
Rinko "B" Pier	40,000	210 m.	11.00 m.
Rinko "C" Pier	40,000	210 m.	11.00 m.
Rinko "E" Pier	20,000	170 m.	10.00 m.

Bulk Carriers: Max. LOA 230 m. Max. beam,, 32 m. Max. draft, 11.0 m.

HEALTH: Radio pratique available. Vessels usually anchor at the point 37° 58′ N., 139° 03′ E., where the authorities board and grant free pratique.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. West bound vessel to Choshi, and North bound to Nagasaki Radio respectively. (Also see "Pilotage").

TUGS: Tugs normally join vessel at position of fairway. Towing operations are done by ship's lines. 7 tugs available, 150 h.p. – 1,800 h.p.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Higashi: West Pier, depth alongside 12 m.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

TANKER: Slop (residues): No discharge facilities.

Berth	*Product*	*Shoreline*	*Discharge Rate (t.p.h.)*
Nisseki Dolphin	Crude Oil	16″×1	700/1,500
	Fuel Oil	12″×1	600/1,000
SBM	Crude Oil	20″×1	3,000
Rinko "B"	Crude, Fuel	10″×2	600/1,500
Rinko "C"	Crude, Fuel	10″×2	800/1,000
Rinko "E"	Crude, Fuel	8″×1	600

DENSITY: Average in Rinko wharves approx. 1006. Average in Municipal wharves approx. 1005.

FRESH WATER: Available from all wharves. Cannot be supplied at anchorage during the winter season.

FUEL: Domestic oil is available; bonded oil will be brought from Hakodate or Moji with 7 days advance notice.

DEVELOPMENTS: The reclamation of land for Niigata East Port completed in 1975. One public berth is ready for about 15,000 d.w.t. class vessel. One shore crane with about 570 M/T discharging capacity for ore in bulk per hour.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore, but no spirits.

CONSULS: None.

DRY DOCKS: No facilities for ocean going vessel.

REPATRIATION: Possible.

AIRPORT: 5 km. Round service Japan Domestic Air Line.

TIME: GMT plus 9. No alterations made to clocks during year.

HOLIDAY: 22nd August.

POLICE/AMBULANCE/FIRE: Water Police Station 44–2269; Ambulance Station 119; Fire Station 119; Main Police Station 110.

TELEPHONES: No facilities for telephones on board available.

SERVICES: Hold cleaning by longshoremen available.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

REGULATIONS: Oil carriers can receive bunker by oil barge and/or shoreline except when discharging cargo.

AUTHORITY: Port and Harbour Bureau.

AGENTS: Sub-agents of Dodwell & Co. Ltd., Tokyo. Niigata Rinko Kairiku Unso K.K., 2-Chome, Rinko-cho, Niigata-shi, Niigata-ken. Tel. Niigata (0252) 74–5181. Domestic Telex 3122–501. Telegraphic "Rinkokairiku Niigata".

NIIHAMA: 33.58 N. 133.16 E. (See Plan Book)

DOCUMENTS:	*No. of copies*
For Quarantine	
*1. Statement by Ship's Master	1
*2. Crew List	1
*3. Passenger List (if any)	1
*4. Yellow Cards for All	
*5. Derating Certificate	
For Immigration	
1. Declaration of Inward Vessel	1
*2. Passport or Seamen's Book for All	
3. Crew List	1
4. Application for Shore Pass.	1
For Customs	
1. Declaration of Inward Vessel	1
*2. Crew List	1
*3. List of Tobacco	1
*4. List of Crew's Baggages	1
*5. List of Ship's Stores	1
6. Cargo Manifest (Discharging)	1
*7. Cargo Manifest (Through)	1
*8. Certificate of Ship's Registry	1
For Harbour Master	
1. Declaration of Inward Vessel	1
*2. Crew List.	1
For Harbour Office	
1. Declaration of Inward Vessel	1

1. Master to telegraph ETA and Crew's Health Condition directly to Quarantine Niihama before arrival.

2. *To be prepared by Master before arrival. Others to be made up by Agent with assistance of Master on arrival.

PILOTAGE: Inland Sea Pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to Pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from one of three Pilot stations dependent upon vessel's last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations. Also see "Shipmasters Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits) Position 34° 38′ N., 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse (vessels transitting Bungo Channel). Position 33° 13′ N., 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimonoseki) Straits. Position 33° 56′ 24″ N., 131° 03′ 12″ E.

ANCHORAGES: Approved anchorage area just inside harbour limit. A circle drawn at a point 33° 59′ 18″ N., 133° 16′ 31″ E. with radius of 430 m. where holding ground good and depth of water 12–15 m. No buoy moorings. Harbour protected by breakwater.

TIDE: (Springs) Max. 263 cm.; min.: –9 cm. (Neaps) max. 182 cm.; min.: 136 cm.

RESTRICTIONS: Pilot does not take vessel in during darkness. Vessel has to wait if depth during low water 8.50 m. is insufficient to pass channel.

MAX. SIZE: See "Berthing".

HEALTH: Quarantine Inspectors go aboard during day. Master to keep waste until Quarantine inspected in event of any suspected disease or fever on board after entered Japan.

RADIO: Choshi Radio, Nagasaki Radio.

TUG: Joins vessel at Quarantine anchorage or Section II, always using tug's lines without charge. "Niihama Maru" 700 h.p. If more powerful tugs required, can be obtained from Matsuyama or Mizushima.

BERTHING: Harbour Pilot operates during day.

Berth	*Length*	*Depth*	*Berthing restrictions*
"A"	Anchorage	8.0 m.	Draft 8.0 m. LOA 120 m.
"B"	Anchorage	9.3 m.	Draft 9.0 m. LOA 165 m.
"B-3" Wharf	103 m.	10.0 m.	Draft 9.5 m. LOA 170 m.
"K-4" Wharf	120 m.	9.1 m.	Draft 9.0 m. LOA 160 m.
"K-6" Wharf	200 m.	14.0 m.	Draft 13.0 m. LOA 200 m.
Kuroshima Buoy	Anchorage	11.0 m.	10,000 d.w.t. or less
"N-4" Wharf	80 m.	7.0 m.	Draft 7.5 m. LOA 110 m.
"N-8" Wharf	110 m.	9.3 m.	Draft 9.0 m. LOA 150 m.
Juki	85 m.	5.0 m.	Draft 5.0 m. LOA 100 m.

Berth A: Public berth for general purposes, no buoy, just anchorage. However, vessel anchoring at this berth sometimes ordered by port authority to shift in order vessel approaching or leaving berth No. 4 may pass.

Berth B: Owned by Sumitomo Chemical Co. Ltd., Niihama Works and used for loading of fertiliser and discharge of phosphate and muriate of potash. Possible to use for general purposes with permission by Sumitomo Chemical Co. Ltd., Niihama Works through Agent. Vessel moors stern to wharf with 2 anchors about 4 shackles each.

CRANES:

Berth "B3"	2× 5 tons
Berth "K4"	3× 5 tons
Berth "K6"	2×25 tons

One 250-ton and one 50-ton floating crane.

LOADING/DISCHARGE RATES:

Average rate of Discharging Cargo:

Alumina	150 – 170 t.p.h. by pneumatic apparatus
Anthracite coal	50 – 70 t.p.h. by ship's gear
Bauxite	700 – 800 t.p.h. by 2 shore cranes
Chemical Oil	200 – 250 t.p.h. by ship's pump
Copper Concentrates	70 – 100 t.p.h. by ship's gear 130 – 150 t.p.h. by shore crane
Logs	600,000–800,000 BFM/day by ship's gear
Nickel Concentrates	70 – 90 t.p.h. by ship's gear 130 – 150 t.p.h. by shore crane
Phosphate	70 – 90 t.p.h. by ship's gear
Potash	40 – 60 t.p.h. by ship's gear
Salt in bulk	50 – 70 t.p.h. by ship's gear 80 – 100 t.p.h. by shore crane

Average Rate of Loading Cargo:

Alumina in bag	50 – 60 t.p.h. by ship's gear
Alumina in bulk	170 – 180 t.p.h. by pneumatic apparatus
Ammonium Nitrate	50 – 60 t.p.h. by ship's gear
Anode Paste	100 – 120 t.p.h. by shore crane
Fertiliser in bag	50 – 60 t.p.h. by ship's gear
Fertiliser in bulk	80 – 100 t.p.h. by ship's gear

MEDICAL: Hospitals and medical facilities available week-days only.

TANKERS: No facilities for oil carriers.

DENSITY: Entrance 1023 (rate of tide, 1 knot); channel 1022; anchorage 1021.

FUEL: Bunkers in bond available from main ports or oil stations in tranship. 2 days notice.

FRESH WATER: Water is available from the berths "K-4" and "K-6" only after normal working hours – 10 t.p.h. Water is not available from any other berths. A 70-ton barge is available, it can supply 300 tons per day.

DEVELOPMENTS: Sumitomo Chemical Co. Ltd., Kikumoto Works, intend to make another Bauxite berth available for large size vessel (suitable for vessels up to 50,000 d.w.t.).

Sumitomo Metal Mining Co. Ltd., Niihama reclaiming land adjacent to Western harbour limit of port of Niihama to construct additional refinery for producing copper with a berth for 25,000 ton vessel to discharge copper concentrate. Final date of completion unknown.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Stevedores.

CUSTOMS ALLOWANCES: Only 50 cigarettes to take ashore. No spirits.

CARGO GEAR: Valid Cargo Gear Certificate sometimes required by stevedores when cargo gear maintenance appears to be poor.

CONSULS: None. Nearest in Kobe.

REPAIRS: Minor repairs only. Main engine piston overhauling possible.

DRY DOCKS: None. For nearest see "Matsuyama".

REPATRIATION: Arranged by Agent.

AIRPORT: None. Nearest at Matsuyama and Takamatsu. All Nippon Airways – 11 flights per day to Osaka and one to Tokyo.

TIME: GMT plus 9 hours. Permanent.

HOLIDAYS: National Holidays: New Year's Day, January 1st; Adult's Day, January 15th; Foundation Day, February 15th; Vernal Equinox Day, March 20th; Emperor's Birthday, April 29th; Constitution Memorial Day, May 3rd; Children's Day, May 5th; Respect-for-age Day, September 15th; Autumnal Equinox Day, September 23rd; Physical Culture Day, October 10th; Culture Day, November 3rd; Labour Thanksgiving Day, November 23rd.

Local holidays: New Year's Day (Lunar Calendar), January 30th; May Day, May 1st; Memorial Day of the Sea, July 20th; Bon Festival (Lunar Calendar), August 8th; Autumnal Festival, October 17th-18th.

Vessels may enter/leave *except* January 1st, and cargo work can be done as usual at overtime rates on above national/local holidays *except* for *Niihama* December 31, January 1, 2, 3, and October 17, 18.

Vessels may enter/leave port at overtime rates and cargo work will be done up to 1700 hrs. (day-time) against surcharges.

No cargo will be handled: *Niihama* December 31, January 1, 2, 3, and October 17, 18. No ship's movement (as well as cargo handling) can be done on January 1st.

POLICE/AMBULANCE/FIRE: Police 110; Ambulance/Fire 119.

TELEPHONES: No facilities for placing telephones on board.

GENERAL: *Quarantine:* Hiroshima Quarantine Office, Niihama Detached Office, Nishibara-cho, Niihama, tel. Niihama 2–3966.

Customs: Kobe Customs, Niihama Branch Customs, Nishibara-cho, Niihama, tel. Niihama 2–3405.

Immigration: Niihama Port Station, Takamatsu Immigration Office, Nishibara-cho, Niihama, tel. Niihama 2–2672.

Maritime Bureau: Sanbashi-dori, Niihama, tel. Niihama 2–2855.

Maritime Safety Agency: Nishibara-cho, Niihama, tel. Niihama 2–3879.

Emergency Procedure: No Harbour Master radio available, therefore cable Agent. Telephone sub-agent since one person will be in attendance even during night, who in turn will contact person in charge.

Salvage: No salvage tug stationed, nearest from Kure.

SHORE LEAVE: Crew allowed ashore with pass.

AUTHORITY: Port and Harbour Bureau.

AGENT: Sub-agents of Dodwell & Co. Ltd., Tokyo. Sumitomo Warehouse Co. Ltd., 2–5, Sobiraki-cho, Niihama-shi, Ehime-ken. Cable Address: Sumitomosoko Niihama. Domestic Telex: 584–4432. Tel.: Niihama (0897) 37–1101.

NISHIHARA (Buckner Bay), Okinawa: 26.14 N. 127.50 E. (See Plan Book)

LOCATION: The Nansei Sekiyu Ltd. Refinery is located in Nishihara village on the East coast of Okinawa, towards the Southern end of Nakagusuku Bay (Buckner Bay). Also see "Max. Size". There is also a Nihon Sekiyu Terminal-SBM about 1 mile North of the NSS SALM.

DOCUMENTS:

3 Manifests
6 Crew Lists
1 Passenger List
1 Store List
1 Personal Effects List
Ship's Register
International Loadline Certificate
Safety Equipment Certificate
Derating Examination Certificate
Last Port Clearance

For Customs, Quarantine and Agent use

Each crew member will be issued with an Official Pass, which must be returned prior vessel sailing.

PILOTAGE: Normally vessels will be expected to enter Nakagusuku Bay through entrance marked Tatsu Kuchi, and pick up Berthing Master inside bay – South of Tsuken Jima. Inside bay Berthing Master requests that vessel keeps South of buoy marking Chikunigaa Shoal. Berthing shall be carried out daytime only.

A safe convenient Pilot ladder is to be provided for the Berthing Master. Berthing Master stays aboard vessel throughout discharge.

MAX. SIZE: For crude vessels a single point mooring (SALM – Single Anchor Leg Type Mooring), capable of handling vessels from 90,000 d.w.t. to 270,000 d.w.t. is established in approximate position Lat. 26° 14′ N. Long. 127° 49.7′ E. about 2.5 miles offshore.

Products are shipped from a pier connected to the shore – the pier has 2 berths, 1 for vessels up to 65,000 d.w.t. and 1 for small vessels up to 4,000 d.w.t.

PRATIQUE: Port Officials will board vessel after berthing.

RADIO: Crude vessels discharging at Nishihara should report ETA at Pilot station (26° 13′ N., 12 ° 52′ E.) 72, 48, 24, 12 hours prior arrival. Berthing instructions and time of Pilot boarding will be relayed by a telegraph appointed Agent, refinery has no VHF radio.

Weather reports essential – particularly during typhoon season.

Naha Radio – JCX medium wave 500 kHz. Traffic lists broadcast at odd hours GMT. Short wave 6470 kHz, traffic lists broadcast at even hours GMT.

ANCHORAGE: Navigation and anchorage in the waters near the NSS product pier and crude berth will in so far as possible be restricted to those ships directed into these waters by Berthing Master. In the interest of safety, ships will not enter the restricted area unless so directed by Berthing Master. The restricted area is within the following boundaries:

Beginning at a point described as 26° 13′ 33.88″ N. Lat. and 127° 47′ 30.24″ E. Long. (N. 25,074.89, E. 29,145.48); thence running S. 60° 00′ 00″ E. a distance of 200 m. to an angle point described as Lat. 26° 13′ 30.62″ N., Long. 127° 47′ 36.48″ E. (24,974.89, N. 29,318.69 E.); thence running S. 35° 40′ 45″ E. a distance of 1,170 m. to an angle point described as 26° 12′ 59.69″ N. Lat., 127° 48′ 00.98″ E. Long. (N. 24,024.88, E. 30,000.82); thence running N. 45° E. a distance of 3,350 m. to a point on the circumference of a circle described as 26° 14′ 20″ N. Lat., 127° 49′ 30″ E. Long.; thence running to the right a distance of 3,710 m. along said circumference, which is described by a radius of 1,060 m. with its centre located at 26° 13′ 56.18″ N. Lat., 127° 50′ 00.00″ E. Long. (N. 25,771, E. 33,300) to a point on the circumference described as 26° 13′ 30″ N. Lat., 127° 50′ 22″ E. Long. thence running S. 48° W. a distance of 1,780 m. to the Naka Sone buoy located at 26° 12′ 54.2″ N. Lat., 127° 49′ 37.5″ E. Long. thence running S. 53° W. a distance of 1,940 m. to the Wara reef located at 26° 12′ 17.7″ N. Lat., 127° 48′ 45.0″ E. Long., thence running W. 18° N. a distance of 2,810 m. to a buoy located at 26° 12′ 44″ N. Lat., 127° 47′ 07″ E. Long., thence running N. 17° W. a distance of 710 m. to a point at 26° 12′ 46.42″ N. Lat., 127° 47′ 56.61″ E. Long., (23,616.16, N. 29,880.55 E.).

TUGS: Two tug boats and a launch are available for assistance in mooring or departing. The Berthing Master in consultation with the Master will decide the number of tugs required for the berthing operation and for standby during the time at berth.

CRUDE BERTH: Single buoy mooring with vessel secured by 2 heavy polypropylene lines from buoy. Lines connected to chains through Bow Mooring Pipe and secured inboard. Chains secured direct to Brega Pin or by double mooring wire or mooring rope (Polypropylene over 8 in.) to bollards, port and starboard side of forecastle head. There is 85 ft. of water at buoy position. Vessels may remain in berth in winds of up to 50 m.p.h.

Floating hoses, 2×24 in. to 2×20 in. connected to 2×16 in. are connected on vessel's port side. There is a 42-in. line from buoy to shore. The maximum pumping rate is 75,000 b.p.h.

PRODUCT PIER: A 290° orientation of the pier allows tankers to approach the berth in a ballasted condition in either of 2 opposite directions. Vessels of 4 m.d.w.t. size and above will be handled at Berth No. 1 and smaller vessels at Berth No. 2.

The water depth at the pier is approximately 47 ft. The extreme tidal variation is +7.9 ft. to –1.0 ft. and maximum storm tide will add approximately 3 ft. The maximum current is less than 1 knot.

Berth No. 1 is equipped with 1–16 in. loading arm for clean products and 2–16 in. loading arms for dark products. Each of these all-metal hydraulically controlled loading arms is fitted with a remotely operated coupling device to connect to a nominal 10 in. ASA, DIN or BS flanged connection without bolting.

Berth No. 2 is equipped with 2–6 in. loading arms for dark products. These arms are part metal, part hose and are fitted with flanges to be bolted to a nominal 6 in. ASA, DIN or BS flanged connection.

Bunker fuel is available at both berths through meters and 4 in. hose connections.

Each berth is provided with a gangway.

Vessels will deballast through the loading arms into a 24 in. ballast water line leading to refinery tankage. Under no circumstances should a vessel discharge any ballast water directly to the bay.

Fire protection at the pier consists of a foam concentrate tank and proportioning pump, a fire water pump and distribution system, fixed combination water–foam monitors and air–foam play-pipes.

TIME: GMT plus nine hours.

SHORE LEAVE: Shore leave is permitted – launch service may be arranged but is at vessel's expense.

AUTHORITY: Nansei Sekiyu K.K., Nishihara Refinery, Okinawa.

OFUNATO: 39.03 N. 141.44 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory but recommended as many fishing obstructions in the harbour. Pilot boards about two miles from entrance of Ofunato Bay, at 38° 59′ N. and 141° 48′ E., where depth 35 m. (but not after dark). Master must radio vessel's Agent of ETA 24 hours in advance, because neither telegraphic address of pilot station nor VHF available.

ANCHORAGE: Not suitable in stormy weather. Depth of water at anchorage 30 to 40 m. Quarantine anchorage located between radius 500 m. of 38° 59′ N. 141° 48′ E.

RESTRICTIONS: Depth of water at entrance of passage 14 m., oil tanker's draft restricted to 11 m. and draft of log and coke carriers restricted to 8 m. Depth of water alongside wharf 9 m. at mean level.

MAX. SIZE: *Tankers:* Kamei Oil Piers Max. d.w.t. 35,000 Max. L.O.A., 210 m. Max. Safe draft 11.0 m.

Log and Coke Carriers: Max. LOA 180 m., max. draft 8.0 m. Tidal range 1–1.4 m.

HEALTH: Radio pratique available. Formalities carried out at the anchorage.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically West bound vessel to Choshi and North bound to Nagasaki Radio respectively.

TUGS: Small tugs 800 h.p. and 600 h.p. available. Large tugs (2,400 h.p.) can be arranged from Kaimaishi with advance notice, they usually join vessel about 400 m. in front of jetty and discharging wharf. Ship's lines used if necessary.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gears not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

TANKERS: One tanker berth. Product handled, Diesel Oil. Shoreline, 8″×2. Discharge rate, 800 t.p.h.

DENSITY: Average density 1020.

FRESH WATER: Available from shore installation. Supply 10 – 15 tons per hour.

FUEL: Domestic oil is available; Bonded oil will be brought from Yokohama or Hakodate, with sufficient advance notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore, but no spirits.

CONSULS: None.

REPAIRS: Minor deck and engine repairs available.

DRY DOCKS: None.

REPATRIATION: Possible.

AIRPORT: Hanamaki Airport about 17 km. from Ofunato. All Nippon Air Lines; two flights between Hanamaki/Tokyo every day.

TIME: GMT plus 9. No alterations made to clocks during year.

TELEPHONES: No facilities for placing telephones on board.

GENERAL: Discharging ex-gearless vessel at wharf unavailable, because no shore crane for discharge.

SERVICES: Surveyor: NKKK and Kentei Shin Nihonsha. Hold and tank cleaning. Provisions/Laundry/Water. Bunker: Domestic diesel oil available.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days; 3 days extension possible if ship stays longer.

AUTHORITY: Ofunato Port Office.

AGENT: Sub-agents of Dodwell & Co. Ltd., Tokyo. Morita & Co. Ltd., No. 108 Chayamae, Ofunato-cho, Ofunato-shi, Iwate-ken. Cable Address: Morita Ofunato. Domestic Telex: 8382-32. Tel.: (01922) 6-5131. Postal No.: 022.

OITA: 33.17 N. 131.40 E. (See Plan Book)

DOCUMENTS: When ship arrives direct from foreign port, customs officials will board the vessel for search. The following documents are to be submitted:–

Crew List.
Passenger List.
Store List.
Declaration of Crew's baggage. (Must be signed by individual Crew member).
Arms and Ammunition List.
Narcotics List.
List of Ports of Call on Current Voyage.
Discharging Cargo Manifest.
Through Cargo Manifest.
Declaration Inward/Outward (Form No. C2000).

The following will be checked on board:–

Ship's Registry.
Last Port Clearance.

When ship comes from Japanese port, Customs officials will not attend on board, except special case. The Master or Agents are to attend at Customs House for entry formalities with the following documents:–

Discharging cargo Manifest.
Through cargo manifest.
Declaration Inward/Outward.
Ship's Registry.
Last Port Clearance.
Documents entrusted with the Master by Customs at previous Port.
Store List.

On ship's departure, a clearance is issued by Customs, after confirming payment of tonnage dues.

No customs house open outside office hours except when advance notice given.

Immigration: Immigration Officials board vessel on her arrival in port to examine passports, discharge books and or other equivalent travel documents and provide 72-hour landing passes for Crew members and passengers. 2 copies each of crew list and passenger list are required by them. Providing ship's Agents with a crew list beforehand will be a great help in expediting immigration business on ship's arrival. When ship stays in port more than 72 hours, the landing passes may be extended every 72 hours on application.

In the event that Crew members, without entry visas, are to be landed for repatriation or transfer, Immigration will not permit their landing unless passage, by either sea or air, ensuring the prompt departure from Japan (within 72 hours) of these men have been booked, or unless the ships to which they are to be transferred, arrive in Japan within 5 days.

PILOTAGE: Not compulsory.

Harbour and sea pilotage are not compulsory, but foreign vessels are recommended to take Pilot from Sekisaki at the position 3 miles South from Sekisaki lighthouse: 33° 13′ N., 131° 54′ E. to the berth via Quarantine station and vice-versa. However, the Master of the vessel may also obtain Pilot at Oita anchorage or Oita quarantine anchorage.

Request must be made at least 24 hours in advance and Pilot should be kept closely advised of vessel's accurate ETA at pilot station. If there is any change in vessel's movements, the Master is requested to immediately radio to the Pilot office directly or through Agents reporting the revised ETA. The cable address of the pilot office is "Anjin Moji".

ANCHORAGES:

No.	Depth (m.)	Capacity (g.r.t.)	Position	Remarks
No. 1	37–38	Under 20,000	33° 16′ 26″ N. 131° 38′ 44″ E.	Within radius of 100 m.
(265°, 3,400 m. from Tsurusaki Hakuchi Breakwater East Lighthouse "A" point).				
No. 2	52–53	Over 100,000	33° 17′ 09″ N. 131° 42′ 00″ E.	680 m. to No. 3 Buoy
(59°, 1,960 m. from "A" point).				
No. 3	48–50	50,000/100,000	33° 17′ 04″ N. 131° 42′ 26″ E.	590 m. to No. 4 Buoy
(70°, 2,490 m. from "A" point).				
No. 4	45–46	20,000/50,000	33° 16′ 52″ N. 131° 42′ 44″ E.	630 m. to No. 5 Buoy Draft up to 15 m.
(80°, 2870 m. from "A" point).				
No. 5	35–40	Under 30,000	33° 16′ 40″ N. 131° 43′ 03″ E.	580 m. to No. 6 Buoy Draft up to 13 m.
(88°, 3,300 m. from "A" point).				
No. 6	35	Under 30,000	33° 16′ 29″ N. 131° 43′ 22″ E.	Draft up to 10 m.
(93°, 3,800 m. from "A" point).				
Shin Nittetsu Anchorage		5,000×3 3,000×3	33° 16′ 26″ N. 131° 39′ 15″ E. (Centre)	Draft 6–40 m.
Quarantine Anchorage	25–43 m.		33° 16′ 00″ N. 131° 46′ 00″ E. (Centre)	

*It is necessary to obtain permission from Harbour before vessel's arrival.

RESTRICTIONS:
Berthing: During daytime only.
Departure: Night departure from wharves in generally impracticable, except vessels at Sea-berth and Seihin berth can depart up to 2000 hrs. However, this will depend upon condition of weather, etc.

MAX. SIZE: See "Berthing" and "Tankers".

HEALTH:

(a) Quarantine Station: 33° 16′ 00″ N., 131° 46′ 00″ E.

(b) Quarantine inspection is not allowed inside port except when weather or other special reasons prevent the quarantine boat from approaching ship at anchorage.

Quarantine is effected in berth for a vessel more than 3,000 g.r.t., provided the vessel possesses valid (i) derat exemption/fumigation certificate. (ii) all crew/passengers are healthy. (Radio message from ship's Master for these items are required 2 days in advance).

(c) Quarantine service is rendered from sunrise to 1 hour before sunset.

(d) "Q" flag should be hoisted until ship has free pratique.

(e) When ship arrives from plague infected or suspected area within 10 days after she left such place, a 24 hour special quarantine is required.

All sanitary outlets must be closed and garbage must not be thrown overboard after ship reaches 60 miles off Japanese Coast.

(f) Radio free pratique possible.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

VHF: Vessel can keep in direct contact with port authorities in regard to their arrival, berthing instructions also Pilots requirements, etc., through VHF, the details of which are as follows:–

(a) Call sign: Oita Port Radio.

(b) Location of radio facilities: The transmitting and receiving station is located at the top of Mount Tohmiyama, Saganoseki (Sekisaki)

(c) Channel: Simplex 16 (Calling)
12 (Communicating)
14 (Communicating)
Antenna power: 50 W.

(d) Operating Hours: 0600–2000 hrs.

(e) Communicating range: Within a radius of 100 km. from the station at sea.

TUGS: Operator: Oita Rinkai Kogyo.

Tug	g.r.t.	H.P.
*Yuhi Maru	276	3,200 Schneider
*Kakuho Maru	199	3,500 C.P.P. Kort Nozzle
*Ryusei Maru	199	2,400 Z-Peller.
Udo Maru	141	2,000
Morita Maru	177	2,000
*Hikita Maru	274	3,200 Z-Peller
*Daiho Maru	293	3,200 Z-Peller
Nagata Maru		3,000

It is a practice to use tug's line for berthing/unberthing.
*Fire extinguishing apparatus equipped.
Kyushu Oil Co., own a special boat equipped with an extinguisher system and station same when a tanker berthing/unberthing at their expense.

BERTHING:

Wharf	Length berth (m.)	Max. LOA (m.)	Max. Safe Draft (m.)	Capacity (d.w.t.)	Public or Private
Sumiyoshi					
No. 1	185	160	9.10	10,000×1	Public
No. 2	185	160	9.20	10,000×1	Public

(Larger size vessels can be accommodated at Nos. 1–2 wharves, using 2 berths)

Wharf	Length berth (m.)	Max. LOA (m.)	Max. Safe Draft (m.)	Capacity (d.w.t.)	Public or Private
Otozu:					
E–3	240	200	11	Under 30,000	Private (Nippon Steel Corp.)
E–4	200	170	11	Under 30,000	
E–5	200	170	12	Under 50,000	,, ,,
E–6	200	170	12	Under 50,000	,, ,,
E–7	200	170	12	Under 50,000	,, ,,

(Larger size vessels (max. 50,000 d.w.t. and 250 m. length O.A.) can be accommodated at the wharves, using 2 berths).

Control tower for vessel's entry/departure to and from Otozu Hakuchi is located at the end of Otozu Hakuchi, close by lighthouse.

Wharf	Length berth (m.)	Max. LOA (m.)	Max. Safe Draft (m.)	Capacity (d.w.t.)	Public or Private
Sea-Berths:					
N–1	310 (plus 125 m. dolphin)	350	22	50,000/200,000	Private (N.S.C.)
N–2	310 (plus 140 m. dolphin)	350	25	5,000/300,000	Private (N.S.C.)
N–3	350 (plus 140 m. dolphin)	350	22	50,000/100,000	Private (N.S.C.)
N–4	210	180	20	5,000/30,000	Private (N.S.C.)

STEVEDORES: *Stevedoring Companies:*

Nippon Express Co. – maximum 4 gangs are available.
(at Sumiyoshi public wharves – Tsurusaki Kairiku Unyu – maximum 4 gangs are available)

Hirohata Kaiun Kaisha – maximum 2 gangs are available for loading steel products (for export) at Nippon Steel Corp.

Tsurusaki Kairiku Unyu – maximum 2 gangs are available for loading steel products (for export).

Nippon Express Co. – maximum 2 gangs are available for discharge steel scrap and pig iron.

Kamigumi Co. – 3 gangs are available for discharging iron ore/coal.

Working Hours:

(a) At Sumiyoshi public wharves: 0800 to 1700 hrs. (No work on Sundays and holidays. No work can be arranged New Years holidays).

(b) At Nippon Steel Works (coal/iron ore) 3 shifts, 0600–1400, 1400–2200, 2200–0600 hrs.

At Nippon Steel Works (loading steel products) 3 shifts/actual nett working:

1.	0700–1100 hrs. meal 1100–1145 hrs.	
	1145–1500 hrs. oiling crane: 0700–0715 hrs.	7.00 hrs.
2.	1500–1800 hrs. meal 1800–1845 hrs.	
	1845–2215 hrs. oiling crane: 1500–1515 hrs.	6.15 hrs.
	2215–0200 hrs. meal 0200–0245 hrs	
3.	0245–0700 hrs. oiling crane: 2215–2230 hrs.	7.45 hrs.
		21.00 hrs.

Average loading/discharging rates:

Bulk cargo:

Iron Ore (sinter)	1600 t.p.h./crane/hatch (dis.)
Coal	1300 t.p.h./crane/hatch (dis.)
Steel Scrap:	1000 tons per day per crane (dis.)
Pig Iron:	2700 tons per day per crane (dis.)
Logs:	30 t.p.h./gang/hatch (dis.)
Steel Cargo: HR. Coil	200 t.p.h./gang/hatch (load)

CRANES:

Shore cranes:

1. Sumiyoshi public wharves— no crane available.
2. N.S.C. loading wharves — 50 t×1, 30 t×3, 20 t×3: (for HR. Coil)
   — 50 t×1, 35 t×1: (for M.S. Plate)
3. N.S.C. Sea-Berth — 81 t×3

Floating Crane: 40 tons capacity available.

MEDICAL: Hospitals available. No advance notice required unless urgent.

TANKERS: Private berths: 24 hours operations.

Kyushu Oil Jetty (Dolphin Style):

Length of berth 480 m, max. LOA 350 m., Max. draft 20.10 m. Capacity 5,000/270,000 d.w.t.

A submarine type rubber oil fence is stretched around the berth.

5 unloading arms are installed on the unloading platform and can be connected directly to ship's manifold. 4 of these unloading arms are 12 in. diameter and used for discharging crude oil/fuel oil.

The other arm is 6 in. in diameter and used for bunkering. Nominal capacity for discharging crude oil is 10,000 Kl/hr. and for bunkering, 450 Kl/hr.

Following information required 3 days before arrival: Manifolds, type, size, number and distance between, also pump capacity.

Showa Yuka Naphtha Berth: (Dolphin) Length of berth 400 m. max. LOA 300 m. Max. draft 15 m. Capacity 5,000/70,000 d.w.t.. Product handled – Naphtha. Rubber oil fence provided at berth.

DENSITY: (Average):

1.023 in Summer season at Sumiyoshi.
1.023 in Summer season at Sea-Berth.
1.021/1.023 in Summer season at Otozu Hakuchi.
1.024 in Winter season at Sumiyoshi.
1.025 in Winter season at Sea-Berth.
1.021/1.025 in Winter season at Otozu.

FRESH WATER: Good fresh water is supplied from hydrants to vessel alongside wharves. The rate of delivery:

At Sea-Berth 30/50 t.p.h. Hydrants every 103 m. (12 hydrants).

At Otozu Wharf: 35/45 t.p.h. hydrants are every 50 m. (21 hydrants).

At Sumiyoshi Public Wharf: 25/30 t.p.h. hydrants every 100 m. (3 hydrants).

At Kyushu Oil Jetty: 25/30 t.p.h. (only 1 hydrant is available. 1 days advance notice required.

At Showa Yuka 70,000 d.w.t. Naphtha Berth: 25/30 t.p.h. 1 hydrant available. 1 days advance notice required.

150 tons water barge available at Oita for period of about 2 years from September, 1978 and in addition to this, oil barge (tank separated for fresh water) of 40 tons capacity available for emergency case.

FUEL: Bonded bunkers supplied by oil barges (except vessel at Kyushu Oil Jetty where rate of delivery is 450 kl/hr.

The rate of delivery: 200/500 t.p.h.

Suppliers	*Delivery agents*	*Installation*
Shell Sekiyu K.K.	Ueno Unyu	Shimonoseki
Esso Oil Co.	Nisshin Tanker	Shimonoseki
Mobil Oil Co.	Nisshin Tanker	Shimonoseki/Oita
Caltex Oil Co.	Shimazu Kaiun	Shimonoseki/Oita
Mitsubishi Shoji	Sanem Shoji	Mutsure/Iwakuni
		Kanokawa
Mitsui & Co.	Chikko Kogyo	Oita
C. Itoh & Co.	Asahi Tanker	Matsuyama
	Chikko Kogyo	Oita
Nissho-Iwai Co.	Nisshin Tanker	Mutsure
		Matsuyama
Nippon Mining Co.	Nippon Tanker	Mizushima
Idemitsu & Co.		
Sumitomo Shoji	Asahi Tanker	Tokuyama
Marubeni Corp.		
Kanematsu-Gosho Co.	Nagai Kaiun	Kokura
	Asahi Tanker	Tokuyama

Fuelling is permitted only during the hours of daytime, observing as always the strict precautions against oil spills into the harbour.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board. Available from Moji.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore, but no spirits.

CONSULS: None.

REPAIRS: 2 companies available.

DRY DOCKS: None.

SURVEYORS:

(a) Classification survey association:

Nippon Kaiji Kyokai	(Moji)
Lloyds Register of Shipping	(Nagasaki or Shimonoseki)
American Bureau of Shipping	(Shimonoseki)
Bureau Veritas	(Fukuoka)
Norske Veritas	(Kobe)

(b) Cargo survey association:

Lloyds Agents	093–331–1311
Nippon Kaiji Kentei Kyokai NKKK	58–3951
Shin Nippon Kentei Kyokai	27–4111
Far East Superintendence Co., Ltd.	58–9225
Japan Inspection Co.	58–7020

REPATRIATION: See "Documents – Immigration".

TIME: GMT plus 9 hours. No alteration made to clocks during year.

POLICE/AMBULANCE/FIRE: Police tel. 110; Ambulance and Fire 119.

TELEPHONES: No telephones can be placed on board.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

According to new Customs regulation, ship's Crew members are requested to land ashore by designated Micro bus or launch from ship at Sea-berth and by launch from ship at Seihin wharves via Customs house.

AIRPORT: Oita Airport: approx. 56 km. to the airport via land. Approx. 16 miles to the airport via sea (hovercraft). (Hovercrafts run between Oita City and the New Oita airport). Domestic line only, Toa Domestic Airlines and All Nippon Airways.

GENERAL: *Japan Maritime Disaster Prevention Centre:*

Tsurusaki Kairiku Unyiu K.K. are appointed by the Japan Maritime Disaster Prevention Centre as base for stock piling and use of the materials for removal of discharged oil.

Restrictions: It is prohibited to pump out bilges, to throw overboard sweepings, waste or garbage of any kind and cleaning dust out of holds, whilst the vessel is in port or in pilotage waters according to regulations. Also, not permitted to wash ship's deck and painting ship's outside shell platings.

Services: The following are available: Laundry, hold cleaning, fumigation, deck and engine stores, provisions, dunnage, Japanese charts (HO and BA charts available from Yokohama and Kobe respectively with adequate notice.).

DEVELOPMENTS: Land reclamation continues in 3 areas. Public wharves as well as private wharves will be constructed.

AUTHORITY: Port and Harbour Bureau.

AGENTS: Sub-Agents of Dodwell & Co. Ltd., Tokyo. Tsurusaki Kairiku Unyu K.K., 1000, Oaza Misa, Oita City, Japan. Postal Code 870-01. Tel. 0975–21–6111/9. Cables: Tsurukai Oita. Telex: 7723-89 Tsurukai.

OMISHIMA (Ohmishima) Inokuchi Port:
34.16 N. 133.00 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Inland Sea pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to Pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from one of three Pilot stations dependent upon vessels last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea pilots also act as harbour pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea pilot stations. Also see "Shipmasters Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits). Position 34° 38′ N. 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse (vessels transitting Bungo channel). Position 33° 13′ N. 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimoneseki) Straits. Position 33° 56′ 24″ N. 131° 03′ 12″ E.

ANCHORAGE: Omishima Island located at centre of the Inland Sea and lies between Ehime and Hiroshima prefectures. Eastern part of island, Inokuchi surrounded by deep water where holding ground good. Oil company located at Inokuchi. No strong winds.

RESTRICTIONS: No restriction on entry; however mooring and unmooring to be carried out during day-time, regardless of tide and current.

MAX. SIZE: *Tankers:* Maruzen Pier, max. d.w.t. 20,000 tons. Max. LOA 230 m. Max. safe draft 9.40 m. However only vessels of 7,000 d.w.t. to discharge white oil, also coasters call to load.

HEALTH: At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from day-light to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Join vessel at sea anchorage, always using tug's line without charge.

TANKERS: No advance information of loading/discharge lines required. No loading facility. Only one berth available for discharge. Product handled, Fuel Oil. Shoreline, 1×10″ Discharge Rate, 400 t.p.h.

DENSITY: Anchorage 1025. Berth 1025.

FRESH WATER: Not available but usually brought by barge from Onomichi (about 3 hrs. run to Omishima). Rate of delivery 80 tons to 200 tons per hour which depends on barge.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore, but no spirits.

CONSULS: No consuls. Nearest Consulates are in Kobe.

REPAIRS: Minor repairs only.

REPATRIATION: Possible.

AIRPORT: Nearest at Matsuyama and Takamatsu.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police 110; Ambulance 119; Fire 119.

TELEPHONES: Not available.

GENERAL: Closed port. To conform with regulations vessel obtains special permission from Maritime Bureau and Customs at Takamatsu to enter.

Customs request vessels calling Omishima to obtain permission to enter at preceding port of call by paying charge at same rate of tonnage dues prior to arrival. This procedure undertaken by Agent. No quarantine station, nearest at Matsuyama. Immigration officer comes from Niihama.

SHORE LEAVE: Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AGENT: See "Niihama".

ONAHAMA (Iwaki City): 36.56 N. 140.55 E.

The port is protected by breakwater, 8,200 ft. long and is open to the South.

DOCUMENTS:

Ship's Register.

Last Port Clearance.

3 Crew Lists including Passport Nos.

3 Passenger Lists.

1 Stores List.

1 Declaration of Crew's baggage, i.e. tobacco wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: No means of communication with Pilots and vessels should arrange pilotage by advising Agent of ETA. Not compulsory; Pilots are available at the anchorage (36° 53′ 05″ N. 140° 54′ E.) for vessels requiring Pilot services.

For Tankers at 36° 52′ 05″ N. 140° 54′ 00″ E.

ANCHORAGE: Just outside No. 1 West breakwater. Depth of water 14–22 m.

RESTRICTIONS: Restriction only by ship's draft. Depths of water alongside wharves 9 and 10 m. at low tide, and rise of tide is about 1.40 m. highest. Berthing daylight only. Unberthing anytime.

MAX SIZE: *Tankers*: Sea Berth: Max. 80,000 d.w.t. Depth 15.0 m. Max. safe draft, 14.00 m. (Also see "Berthing").

HEALTH: Radio pratique available. Formalities will be carried out at anchorage (36° 53′ 05″ N., 140° 54′ E.).

RADIO: Recommended Captain communicates with Agent through Chosi Radio or Nagasaki Radio which covers all ports in Japan. If specifically West bound vessel to Chosi and North bound to Nagasaki Radio respectively.

TUGS: Normally join vessel on passage from anchorage. Vessel's lines used. 4 tugs available, 1×2,400 h.p., 1×2,100 h.p and 2×800 h.p.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Capacity (d.w.t.)*	*Shore Cranes*
No. 1 Pier No. 3	150	9.0	8.5	10,000	1×6 T 1×7 T
No. 2 Pier No. 1	165	9.0	9.0	10,000	1×8 T
No. 2	185	10.0	9.7	15,000	1×8 T
No. 3 Pier No. 1	175	10.0	9.7	15,000	1×8 T
No. 2	175	10.0	9.7	15,000	1×8 T
No. 3	175	10.0	9.7	15,000	1×8 T
No. 4	175	10.0	9.7	15,000	1×8 T
No. 4 Pier No. 1	90	4.5	4.0	1,000	
No. 2	200	10.0	9.7	15,000	
No. 3	200	10.0	9.5	15,000	
No. 4	80	6.0	5.5	3,000	
No. 5	80	6.0	5.5	3,000	
No. 6	80	6.0	5.5	3,000	
Fujiwara Pier (Logs Disch.) No. 2 & 3	225	10.0	9.7	15,000	
Fujiwara Pier No. 1 (Logs Disch.)	185	10.0	9.7	15,000	
Fujiwara Pier No. 4 (Logs Disch.)	120	6.5	6.2	5,000	

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gears not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

TANKERS: Sea Berth: Product handled, Naphtha and Crude Oil. Shoreline 16″×2. Discharge rate 9,000 k/l per hour. Bunkers not available ex-pipe-line.

DENSITY: 1025.

FRESH WATER: Available from shore lines, at about 30 tons per hour. Additional 30% for overtime service; 1700–0800 hrs., Saturday afternoon, Sunday and holiday.

FUEL: Domestic oil is available; bonded oil will be brought from Yokohama with sufficent advance notice, when required.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnage. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Minor repairs only.

DRY DOCKS: None.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Iwaki (02465); Police 3–3141; Ambulance and Fire, 119.

TELEPHONES: No facilities for connecting on board.

SHIPMASTERS REPORT: June 1975

The port is protected by breakwaters, 1 running North and N.E. 11,170 ft. long and 1 running Westerly and W.S.W'ly 5,520 ft. long, the latter which affords some protection from Southerly swell. *Pilotage:* The Pilot boards at the main breakwater entrance. If possible, obtain Japanese Port Chart No. 63 and approach Chart No. 68.

Anchorage: If awaiting Pilot anchor approximately 1 mile E.S.E. of the Southern extremity of the East breakwater.
Max. Size: Several new berths have recently opened, including No. 5 and No. 6.
Health: The centre of the Quarantine anchorage is located 6 cables S.E. from the Southern extremity of the East breakwater. Radio pratique is accepted if a Japanese Sanitary Inspection Certificate is held.
AUTHORITY: Onahama Port Administration and Harbour Construction Office, Fukushima Prefecture.
AGENT: Sub-agent of Dodwell & Co. Ltd., Tokyo. Onahama Kairiku Unso Kaisha, Ltd., 36 Tatsumi-cho, Onahama, Iwaki-shi, Fukushima-ken. Cable Address: Kaiun Iwaki. Domestic Telex: 8922-80 Onakai J. Tel.: (0246) 53-3221/6. Postal No.: 971.

ONOMICHI-ITOZAKI (incl. Mihara, Matsunaga): 34.20 N. 133.16 E.

DOCUMENTS:
- Ship's Register.
- Last Port Clearance.
- 3 Crew Lists including Passport Nos.
- 3 Passenger Lists.
- 1 Store List.
- 1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declarations, 1 Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.
PILOTAGE: Inland Sea pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to pilot station. Inland Sea Pilot Association covers all Inland Sea Ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from one of three pilot stations dependent upon vessels last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations. Also see 'Shipmaster's Report' before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits). Position 34° 38′ N. 135° 11′ E. Telegraphic address "Anjin Kobe".
2. Sekisaki, 3 miles South of Sekisaki lighthouse (vessels transitting Bungo Channel). Position 33° 13′ N., 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.
3. Hesaki, at East side of Kanmon (Shimoneseki) Straits. Position 33° 56′ 24″ N. 131° 03′ 12″ E.

Inland Sea Pilot also berths vessels at anchorage berth (if Matsunaga Bay – logs), or pier in Itozaki district (Mihara section).
ANCHORAGES: Draft limitations: Itozaki-Mihara 7.5 m. Matsunaga Bay 8.5 m. Tidal range: Maximum (+) 3.91 m. Minimum (−) 0.09 m. Capacity for 3×20,000 ton vessels.
RESTRICTIONS: Entry possible anytime, sailing possible up to 2000 hrs.
HEALTH: Radio pratique not available. Vessels usually anchor at Wada-Misaki (off Kobe), or Hesaki (off Moji), where the authorities board and grant free pratique.
RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.
TUGS: Brought from Fukuyama, Mizushima or Kure, when required.
BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft and Length overall (m.)*	*Capacity (G/T)*
Municipal Nishigosho Pier	404	6.5	5.0×130	2,000
Municipal Shinhama Pier	250	5.5	4.5×100	2,000
Matsunaga Bay (Anchorage)		5.0–10.0		1×10,000 1× 6,000 1× 3,000

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.
MEDICAL: No advance notice required unless urgent.
TANKERS: No facilities.
FRESH WATER: Available. Method of delivery (1) Barge. (2) Pier. Additional charge for overtime work and in event of bad weather.
FUEL: Domestic oil is available; Bonded oil will be brought from Kobe, Kanokawa, Hirohata or Moji.
OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.
CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.
CUSTOMS ALLOWANCE: Only allowed 40 cigarettes to take ashore but no spirits.
REPAIRS: Minor repairs possible.
CONSULS: None.
REPATRIATION: Possible.
AIRPORT: Nearest, Tokyo International Airport.
TIME: GMT plus nine hours. Permanent.
POLICE/AMBULANCE/FIRE: Police 110; Ambulance/Fire 119.
TELEPHONES: No arrangements for placing telephones on board.
SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extensions possible if ship stays longer.
AUTHORITY: Port and Harbour Dept.
AGENT: Sub-agent of Dodwell and Co. Chugoku Kaiun Kaisha Ltd., Onomichi Chuo-Sanbashi Bldg., No. 10–3, Tsuchido 2-chome, Onomichi-shi, Hiroshima-ken. Cable Address: Chugokukaiun Onomichi. Domestic Telex: 6422-15. Tel.: Onomichi (0848) 22-3141/4.

OSAKA: 34.39 N. 135.26 E. (See Plan Book)

DOCUMENTS:
- Ship's Register.
- Last Port Clearance.
- 3 Crew Lists including Passport Nos.
- 3 Passenger Lists.
- 1 Store List.
- 1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.
PILOTAGE: 24 hours notice required. Telegraphic address: "Hanshinpilot Osaka". VHF contact on Channels 12, 16, 19, 20. Agents operate Channel 26. Three 15-ton Pilot boats with radio equipment to pilot office. Pilot boards anywhere within harbour limits. In event bad weather Pilot boards just inside breakwater when acknowledgement obtainable from Master. If awaiting Pilot, anchor inside harbour limits as near as possible to breakwater.
ANCHORAGES: Sections Nos. 7 and 8. Section 7 is quarantine anchorage. Section 8 for other vessels. Harbour Master allocates anchorage position prior vessel's arrival which radioed to Master by Agent. Max. draft about 42 ft.
RESTRICTIONS: Vessels only permitted enter from sunrise to 2000 hrs. However, order avoid danger, some wharves (oil wharf, Nakayama wharf and various shipyards where there is not enough space to conduct berthing operation), accept vessel only until sunset. Max. depth 39 ft. 4 in., Wharf No. 49.

Depth restrictions at other berths depend upon berth allocated. But less than 39 ft. 4 in.
MAX. SIZE: Max. permissible length, 750 ft., draft 34 ft. 6 in. Also see "Tankers".
HEALTH: Vessel requiring free pratique requested cable directly to "Quarantine Station", Osaka informing ETA, date of departure from last port, name of last port, number of crew and health condition. At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from day-light to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days Captain must advise crew and passengers health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

Radio Pratique is available only for a vessel which possesses Valid Sanitary Inspection Certificate issued by the Japanese Government.
RADIO: Osaka Port Radio, 24-hour VHF service on Channels 16, 12, 19 and 20. Osaka Harbour Radar has 24-hour navigation aid and weather information service. Contact by VHF Channels 16, 14 and 22.
TUGS: Tugs join vessel just before harbour entrance. Tug's lines used, no extra charge.

BERTHING: No specific requirements. Pilot boarding time will be notified by VHF or radio.

Wharf	Wharf Length (m.)	Water Depth (m.)	Mooring Capacity		Main Cargoes Handled
			Gross tons	No. of Ships	
North Port Wharf 1	250	10.0	10,000 500	1 1	Bulk
North West Wharf 2	120	5.5	1,000	1	Bulk
Umemachi West Wharf	673	12.0 9.0	30,000 20,000 7,000	1 1 1	Coal, General Cargoes Oil, LPG
Umemachi Pier	395	10.0	10,000	2	Bulk, Oil
Sakurajima Wharf	335	10.0	7,000 10,000	1 2	General Cargoes
Ajikawa Pier North Wharf	482	5.5	1,700	5	Passengers, General Cargoes
Ajikawa Pier West Wharf	120	5.5	1,000 500	1 1	General Cargoes
Ajikawa Pier South Wharf	312	6.5	2,000 1,000	2 1	General Cargoes
Ajikawa Wharf 2	360	10.0	10,000 8,000	1 1	General Cargoes
Ajikawa Wharf 3	178	10.0	10,000	1	General Cargoes
Osaka Port Silo Wharf	92	11.0	13,000	1	Bulk Grains
Ajikawa Wharf 1	320	10.0	10,000 3,000	1 1	General Cargoes, Bananas
Tempozan Wharf	130	7.5	3,000	1	Passengers, General Cargoes
Ajikawaguchi Wharf	185	10.0	10,000	1	General Cargoes
Central Pier North Wharf	210	11.0	13,000	1	General Cargoes
Central Pier South Wharf	210	10.0	10,000	1	
Wharf 1	500	10.0 5.5	10,000 700 500	2 1 1	General Cargoes
Wharf 2	341	10.0	10,000 5,000	1 1	General Cargoes
Wharf 5	382	9.0	6,000 500	2 1	General Cargoes, Salt, Bulk, Cement
Wharf 6	359	10.0	10,000	2	General Cargoes
Wharf 7	361	10.0	10,000	2	General Cargoes
Wharf 8	336	7.5	3,000 1,000	2 1	General Cargoes, Bulk Cement
Wharf 10	617	5.5–9.0	7,000 5,000 3,000 1,000	1 1 2 1	Steel
Taisho Pier 1 North Wharf	471	5.5	1,000	5	General Cargoes
Wharf A	1,040	7.5	3,000	8	General Cargoes
Wharf B	550	7.5	3,000	4	Paper, Pulp, General Cargoes
Wharf D	580	7.5 5.5	3,000 1,000	2 3	General Cargoes, Autos
Wharf E	821	7.5 5.5	3,000 1,000	2 5	Passengers, Autos General Cargoes
Wharf G	540	5.5	1,000	6	Steel, General Cargo
Wharf I	450	5.5	1,000	5	General Cargoes
Wharf J	240	12.0	20,000	1	Food
Containership Wharf No. 1 (C 1)	250	12.0	25,000 D/W	1	General Cargoes
Containership Wharf No. 2 (C 2)	250	12.0	25,000 D/W	1	General Cargoes 2×30.5 ton Gantry cranes
Containership Wharf No. 3 (C 3)	300	12.0	35,000 D/W	1	General Cargoes
Containership Wharf No. 4 (C 4)	250	12.0	25,000 D/W	1	General Cargoes
Contanership Wharf No. 5 (C 5)	300	12.0	35,000 D/W	1	General Cargoes
Ferry Wharf F 1	165	7.5	8,000	1	Passengers, Autos, General Cargoes
F 2	130	6.0	3,000	1	
F 3	148	6.0	3,000	1	
F 4	165	7.5	8,000	1	
F 5	165	7.5	8,000	1	
F 6	130	6.0	3,000	1	
F 7	230	10.0	10,000	1	
Heavy Load Wharf R 3	240	12.0	25,000	1	Heavy Cargoes

CONTAINER FACILITIES: Berths C1, C2, C3 and C4 each equipped with container handling gantry cranes. Berth C1 equipped to handle Roll-on/Roll-off.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gears not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

TANKERS: No slop discharge facilities. Wharf No. 49, Sakurajima Oil Wharf, max. LOA 210 m, max. safe draft 11.60 m. Product handled, Fuel oil, diesel oil. Minas Waxy. Shoreline 1×12in. Discharge rate 1,000 t.p.h.

Wharf No. 25. Max. LOA 210 m. Max. safe draft 10.30 m. Product handled, Fuel oil. Shoreline 1×14in. Discharge rate, 850 t.p.h.

DENSITY: Outside anchorage: 1023–1025. Near breakwater: 1020–1022. Average density inside breakwater 1020. Wharves near estuaries (Aji river, Shirinashi river, Kizu river and etc.): 1016–1020.

FRESH WATER: Methods of delivery: by barges or pipe-line. Rate of delivery: 200 ton barges – 4; 160 ton barges – 1; 60 ton barges – 1; Total – 6.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at max. 7 days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore, but no spirits.

CARGO GEAR: See "Certificates", but no special requirements.

CONSULS: The following consulates available in Osaka:

Great Britain	Denmark	Mexico
Spain	Korea	

REPAIRS: All grades repairs possible.

DRY DOCKS: Mitsui Shipbuilding & Engineering Co. Ltd., Fujinagata Works, No. 1 dock size 446 ft. 2 in.×55 ft. 2 in., depth 17 ft. No. 2 dock size 541 ft. 2 in.×66 ft. 2 in., depth 23 ft. 5 in.

Hitachi Shipbuilding & Engineering Co. Ltd., No. 1 dock size 653 ft. 5 in.×88 ft., depth 34 ft. 3 in. No. 2 dock size 547 ft. 6 in.×75 ft. 3 in., depth 28 ft. 3 in.

Namura Shipyard Co. Ltd., No. 1 dock size 590 ft. 3 in.×90 ft. 1 in., depth 29 ft. 4 in. No. 2 dock size 478 ft. 7 in.×72 ft. 1 in., depth 29 ft. 1 in.

Sanoyasu Dockyard Co. Ltd., No. 1 dock size 508 ft. 3 in.×71 ft. 1 in., depth 24 ft. 2 in. No. 2 dock size 367 ft. 3 in.×55 ft. 6 in. depth 22 ft. 8 in.

AIRPORT: One hour required from Osaka Port to Osaka International Airport by car (about 25 km. distance). Regular airlines:

Overseas Lines, Japan Airlines, Cathay Pacific Airlines, China Airlines, Thai International Airlines, North West Airlines, Pan American Airlines, British Airways, Korean Airlines, Lufthansa Airlines, Scandinavian Airlines.

Domestic Lines, Japan Airlines, All Nippon Airways, Toa Airways.

TIME: GMT plus 9. No alterations made to clocks during year.

HOLIDAYS: Public 20 July; Sakurajima Nil; Silo Wharf 20 July; Nakayama Steel Nil.

POLICE/AMBULANCE/FIRE: Police tel. 110; Ambulance tel. 119; Fire tel. 119.

SERVICES: All services available.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port and Harbour Bureau.

AGENT: Dodwell Tramp Agencies, Osaka Kagaku-Seni Kaikan, 39, 5-chome, Kawara-machi, Higashi-ku, Osaka. International Telex: J63250. Cable Address: Dodtramp Osaka. Domestic Telex: 522-3948. Telephone: (06) 203-5151.

OTARU: 43.12 N. 141.01 E. (See Plan Book)

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Pilot district fixed by Ministry of Transport. Limit of Otaru piloting district is sea area surrounded by line drawn from Kayashiba-misaki to Horaiso-misaki and coast line. Licensed Pilots stationed in office from 0900 to 1700 hrs. When Pilot observes pilot signal or is requested by any other means he comes out to ship at once. Boarding place about one mile from North B.W. Lt. H. 70°. Pilot boat painted white and carries International Code flag "H" at forecastle deck. "Otaru Pilot" registered cable address for Otaru Pilot Association.

ANCHORAGE: Depth of water inside breakwater is 3.6 to 19.0 m. (average 9.4 m.) and nearly everywhere, except some Southern parts, good anchorage. Sea area, outside breakwater, also good holding for anchors, but be careful not to foul fishing nets. Around quarantine anchorage is best anchorage of ship staying outside breakwater.

RESTRICTIONS: Quarantine and Customs business between 0800 hrs. and 1700 hrs. Pilot: Vessel allowed to enter and leave day and night. Pilot assistance officially not compulsory but in practice necessary, and Pilots available 24 hours.

MAX. SIZE: *Buoys:* Four mooring buoys available for large vessels.

Pier and wharves: Four piers, two wharves, and one coal pier. Also No. 5 pier now under construction.

Mooring Buoys

Buoy Nos.	6
Position from North B.W. Lt.	218′ 650 m.
Buoyance (ton)	15
Available capacity (g/t)	12,000

Cargo handled: grain, soyabeans, timber, fertiliser, foodstuffs.

Piers and Quays

	Length (m.)	*Depth of water* (m.)	*Capacity* (g/t)	*Main usage*
Pier No. 1:				
Berth No. 1–2	339	8.7–10.0	10,000×1 6,000×1	General cargo
3	127	7.5–9.0	3,000×1	Ore
4–5	293	8.1–9.4	6,000×2	Grain
Pier No. 2:				
Berth No. 7–8	293	8.7–9.8	6,000×2	Banana and GC
9	126	7.9–8.5	3.000×1	GC
10–11	293	8.0–9.5	6,000×2	GC and grain
Pier No. 3:				
Berth No. 13–14	343	8.3–10.0	6.000×1 10,000×1	GC, grain and Lumber
15	127	8.3–10.0	3,000×1	GC, grain and
16–17	361	8.3–10.0	10,000×2	Lumber
Pier No. 4: (Central Piers)				
Berth No. 1–2	540	7.5–10.0	3,000×1 10,000×1	GC GC
3	260	10	10,000×1 1,000×1	GC Ore
4–5	400	7.5–10.0	20,000×1 3,000×1	Grain GC
Wharf A:				
Berth No. 6	128	5.3–7.3	1,000×1	GC
18	129	5.2–5.7	1,000×1	GC
Sakai-machi Quay				
Berth No. 1–2–3	352	6.2–7.3	2,000×3	GC
Umaya-machi Quay				
Berth No. 1–2–3	392	6.6–7.5	3,000×2	Oil, cement, GC

HEALTH: See Hakodate.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Two tugs available for large vessels. Tugs M/S "Sakura Maru" 147 g/t 1,000 h.p. M/S "Tatwiea Maru" 38 g/t 180 h.p. Both belong to city's Harbour Bureau.

Position: Tug boat waits and joins vessel near appointed berth according to Agent's request. Tug's line in general use.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 100% additional.

MEDICAL: No advance notice required unless urgent.

TANKERS: Available berthing for small vessels only, 1,000 g/t and usual berthing 300–500 g/t. Japanese tankers only. Draft: max. permitted 7.2 m. discharging: about 100 k/t per 1 hour.

DENSITY: Average 1025.

FRESH WATER: Good drinking-water at all piers and wharves. Two water barges (both 150 tons) available when off shore in harbour. International code flag "YJ" used as "I want fresh water".

Remarks: Charges for water supply outside office hours (1700–0830) increased by 50% of basic. Very bad weather add 50%.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.

FIRE PRECAUTIONS: No smoking at tanker berth, Umaya Machi Ganpeki No. 1 and No. 3 berth.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 20 cigarettes to take ashore, but no spirits.

CONSULS:

American Consulate, Sapporo in Sapporo City only.
Tel. 011-221-5121.

U.S.S.R. Consulate, Sapporo in Sapporo City only.
Tel. 011-561-3171.

Korean Consulate, Sapporo in Sapporo City only.
Tel. 011-621-0288.

REPAIRS: All type of deck and engine repair are possible.

DRY DOCKS: None.

REPATRIATION: Possible.

AIRPORT: Distance from airport to Agent's office at Otaru about 80 km. Service bus air station in Sapporo to airport by each airline. Charge: Y200. – Flights: JAL (from Chitose airport to Tokyo airport) 14 times per day. ANA (from Chitose airport to Tokyo airport) 13 times per day. Kokunai Koku twice per day.

TIME: GMT plus 9. No alterations made to clocks during year.

HOLIDAYS: Stevedores do not work on 1st May.

POLICE/AMBULANCE/FIRE: Tel. Police 110; Ambulance and Fire 119.

TELEPHONES: Arrangable on board.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port and Harbour Bureau.

AGENT: Sub-agents of Dodwell & Co., Tokyo. Narasaki Sangyo Co. Ltd., Otaru Branch, Mitsui Bldg., 1–9 1-chome, Ironai-cho, Otaru-shi. Tel. Otaru (0134) 23-3281. Telegraphic "Narasaki Otaru". Telex: 9526-40.

OWASE: 34.04 N. 136.15 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare 2 Inward/outward Declarations, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Ocean-going vessels calling at Owase have cargo destined to Toho Oil, Owase Refinery only. There is no local Pilot Association in this port and the Oil Refinery's Dock Master boards all vessels as a Pilot. Pilot boarding time is passed to ship by ship's Agents after consulting with Pilot (Dock Master) and he boards vessel 1 mile East of Toto Island.

ANCHORAGE: Quarantine Anchorage position is 34° 4′ 13″ N. 136° 16′ 43″ E. Depth Water 60–80 m. Radius 500 m. However, it is not advisable for vessels to stay there for a long time as there are many fishing boats nearby.

RESTRICTIONS: According to Agreement between Fishery Association and Oil Refinery, ship's movement is prohibited at night.

MAX. SIZE: See "Tankers".

HEALTH: Radio pratique available. Formalities carried out after entering the port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which covers all ports in Japan. If specifically Westbound vessel to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Tugs usually join vessel at Harbour Limit (near Sabaru Island) and tug's line is used. Tugs come from Nagoya.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

MEDICAL: No advance notice required unless urgent. Hospital facilities available.

TANKERS: *Toho Oil Owase Pier:* Depth of water 17.3 m. Max. d.w.t. 150,000. Max. LOA, 260 m. Max. safe draft 16.50 m. Product handled, crude oil. Shoreline 2×12 in. Discharge rate, 4,000 k/l per hour.

Toho Oil Sea Berth: Depth of water 21.0 m. Max. d.w.t. 210,000. Max. LOA, 350 m. Max. safe draft 19.00 m. Product handled, crude oil. Shoreline 2×20 in. Discharge rate 8,500 k/l per hour.

FRESH WATER: Fresh water can be supplied to the vessel from pipe at Quay. Supply Capacity 30 t.p.h.

FUEL: Domestic oil is available; Bonded oil will be brought from Nagoya, Yokohama, Chiba or Kobe.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS/REPAIRS/AIRPORT: None.

TIME: GMT plus 9 hrs. Permanent.

TELEPHONES: Emergency numbers, Owase Police Office (05972); 2–0004; Owase Fire Station (05972) 2–2020; Owase Hospital (05972) 2–2118. No facilities for placing telephones on board.

SHORE LEAVE: Local Immigration offices issue shore pass valid for only 3 days, but extension possible if ship stays longer.
AUTHORITY: Port and Harbour Dept.
AGENT: See "Yokkaichi" (Uyeno Unyu Shokai).

SAKAI: (Including Senboku and Hannan Port). 34.34 N. 135.27 E. (See Plan Book)

DOCUMENTS:

Ship's Register.
Last Port Clearance.
7 Crew Lists including Passport Nos.
2 Passenger Lists.
1 Store List
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (if first port of call in Japan).

Ship's Agent will prepare inwards/outward Declaration, 1 Cargo Manifest in transit using specific form. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Cable address "Hanshinpilot Osaka". 24 hours notice required. VHF (Osaka Port Radio), Chanel 16, JBD Osaka Radio, Channels 25, 26 and 27. Three boats capacity 15 tons, 147 h.p. Pilot boards anywhere within harbour area, but preferably at quarantine anchorage – sector No. 7. Bad weather: unable to take Pilot. Boarding measures: Safe Pilot ladder. Anchorage for vessel waiting Pilot: as Pilot boarding area.

Inland sea Pilot cable address: "Anjin Kobe" can also be used for following wharves: Kansai Oil Co. Ltd., Sakai Wharf; Koa Oil Co. Ltd., Sakai Wharf.

ANCHORAGE: Quarantine inspection carried out at quarantine anchorage Sect. No. 7 where max. draft 12.5 m. Vessels with draft over 12.5 m. have to obtain free pratique at other ports.

RESTRICTIONS: Entry not possible after sunset. Sailing possible anytime but Pilots not available after sunset.

(a) Arrival notice for ships over 500 tons gross must be given to Harbour Master 48 hrs. prior to arrival.

(b) Entrance passage draft limitation: 11.20 m.

MAX. SIZE:

Name of Wharf (Jetty)	*Max. draft* (m.)	*Max. LOA* (m.)
Nippon Steel Wharf 3-A/3-B	14.0	255
,, ,, ,, 2-H	10.2	181
Ube Kosan Wharf (Export)	9.0	130
,, ,, ,, (Import)	10.2	174
Public Wharf 3 & 6	9.0	160
,, ,, 1, 2, 4, 5 only for vessel less than 500 tons		
Osaka Seiyosho Wharf	9.0	144

Tankers:

Name of Berth	*Max. d.w.t.*	*Max. LOA (m.)*	*Max. Safe draft (m.)*
General Wharf	130,000	290	15.50
Kansai Oil Jetty	130,000	320	15.50
Koa Sekiyu Crude Oil	150,000	320	15.50
Ube Kosan, Sakai "D" Wharf	20,000	170	9.20
Marubeni Sakai	50,000	250	12.50
Kansai Oil Jetty (LPG)	160,000	320	15.50
Mitsui Toatsu (LPG)	50,000	200	14.00
Osaka Gas Semboku Jetty (LNG)	37,000	230	10.00

HEALTH: Radio pratique available. Vessels usually anchor at the quarantine anchorage in Osaka, where the authorities board and grant free pratique.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

BERTHING:

Sakai:

Berth	*No.*	*Water Depth (m.)*	*Total length (m.)*	*No. of berths*	*Ship tonnage (D.W.T.)*
Shiohama wharf	1	7.0	120	1	4,000
Ohama wharf	1	4.5	60	1	700
,, ,,	2	5.5	270	3	2,000
,, ,,	3	7.0	240	2	4,000
,, ,,	4	9.0	165	1	10,000
,, ,,	5	10.0	370	2	15,000
,, ,,	6	7.5	130	1	5,000
Senboku:					
Matsunohama wharf	1	5.5	540	6	2,000
Komatsu wharf	1	5.5	360	4	2,000
,, ,,	2	7.5	390	3	5,000
Shiomi wharf	1	4.5	480	8	700
Hannan:					
Kishiwada wharf	1	10.0	185	1	15,000
,, ,,				1	20,000
,, ,,				1	15,000
Mooring buoys				1	10,000
,, ,,				1	5,000
Kaizuka wharf	1	−6.5	202	2	2,000

There are many additional berths with depth of 2m. – 4m.

TUGS: Join vessel at anchorage under instruction or attending Pilot. Tug lines used, cost in tug hire.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agents to arrange stevedores. Vessel must constantly keep her Agents advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agents, the orderers must pay for waiting time. If cargo gears not rigged on berthing, stevedores will do same for ship's crew at additional cost. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

TANKERS:

Berth	*Product*	*Shoreline*	*Discharge Rate (t.p.h.)*
General Wharf	Fuel Oil	12 in.×3	7/8,000
	Crude Oil	12 in.×3	9,000
Kansai Oil	Fuel Oil	10 in.×1	600
Jetty	Crude Oil	36 in.×1	7/8,000
Koa Sekiyu Crude Oil	Fuel/Crude	32 in.×1	5,000
Ube Kosan, Sakai "D" Wharf	Naphtha	12 in.×1	700
Marubeni Sakai	Fuel Oil	16 in.×1	2,500
Oil Terminal	Minas Oil	18 in.×1	2,500
Kansai Oil	Propane	12 in.×1	1,000
Jetty (LPG)	Butane	10 in.×1	1,000
Mitsui Toatsu	Propane	12 in.×1	1,000
(LPG)	Butane	12 in.×1	1,000
Osaka Gas Semboku Jetty (LNG)	LNG	8 in.×5	2,000

DENSITY: Osaka Gas Wharf and Nippon Steel Corporation Wharves 1020 to 1025.

All other wharves, 1010 to 1025.

FRESH WATER: Minami Hakuchi anchorage by barges. All other wharves by shore line.

FUEL: Most domestic and bonded fuels available.

GANGWAY/DECK WATCHMEN: Recommended and compulsory for tankers working cargo.

OPENING/CLOSING HATCHES: Stevedores open and close hatches with terms subject to charter party.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: Each man allowed 200 cigarettes to take ashore but no spirits.

CARGO GEAR: See "Certificates" but no special requirements.

CONSULS: None.

REPAIRS: See "Osaka".

DRY DOCK: Hitachi Shipbuilding & Engineering Co. Ltd., Sakai Shipyard, Dock No. 2, length 455 m., width 63 m., depth 11 m., capacity 400,000 d.w.t.

REPATRIATION: Possible.

AIRPORT: International Airport Osaka, 45 km. distant.

TIME: GMT plus 9 hrs. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: See "Osaka".

TELEPHONES: Available except Nippon Steel Wharf and Public Wharf.

SHORE LEAVE: Local Immigration Officers issue shore-leave pass valid for 3 days, but a 9-day pass is obtainable in case where a vessel stays in port for longer period.

DEVELOPMENTS: 40 berths under construction at Sakai-Seaboku. Max. depth 12 m. 58 berths under construction at Hannan, depths from 4 m.–7.5 m.

AUTHORITY: Port Administration Office.

AGENTS: See "Osaka".

SAKAIDE: 34.19 N. 133.51 E. (See Plan Book)

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc (only at first port of call in Japan).

Ship's Agents will prepare Inward/Outward Declaration, Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Inland Sea pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to Pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from one of three Pilot stations dependent upon vessels last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. Also see "Shipmasters Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits) Position 34° 38′ N.; 135° 11′ E. Telegraphic address "Anjin Kobe".
2. Sekisaki, 3 miles South of Sekisaki lighthouse (vessels transitting Bungo Channel). Position 33° 13′ N. 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.
3. Hesaki, at East side of Kanmon (Shimonoseki) Straits. Position 33° 56′ 24″ N. 131° 03′ 12″ E.

ANCHORAGE: Port located on North coast at East part of Shikoku Island in Inland Sea.

Boundaries and Areas. Area bounded by line joined with three points, East corner of Sosha river mouth, Mamako-Hana of Semi Jima and Tako-Saki of Shotsuji-Yama.

Depth of water inside harbour limit: 11 m. outside harbour limit: 13 m.

RESTRICTIONS: Vessels entering and/or leaving during daytime only at wharves; but done day and night at sea anchorage provided favourable weather conditions prevail.

MAX. SIZE: East section of Centre pier, length 160 m., breadth no limit, depth 9 m.

West section of Centre pier, length 110 m., breadth no limit, depth 7.50 m.

Mitsubishi Chemical Industries wharf, length 250 m., breadth no limit, depth 12 m.

Anchorage inside breakwater, length no limit, breadth no limit, depth 7–9 m.

Anchorage outside breakwater, length no limit, breadth no limit, depth 10 m.

Tankers: Asia Kyoseki Pier No. 1 – 195,000 d.w.t.

HEALTH: At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from Cholera infected area within 10 days, Captain must advise crew and passengers health condition prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

VHF: *Shipmaster's Report:* There is a VHF radio station at Sakaide in position 34° 21′ 00″ N. 133° 51′ 00″ E. Watch is kept from 0600 to 2000 hrs. each day, using Channel 16. The radio station will indicate where to anchor if there is a delay in berthing.

TUGS: Wharves. Join vessel at sea anchorage, using tug's line without charge. Sea anchorage. No tug required in normal conditions.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agents mainly by radio.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.

MEDICAL: No advance notice required unless urgent.

TANKERS: Asia Kyoseki refinery No. 2 pier. Depth 13 m. Product handled, Crude oil. Shorelines 2×20 in. (One for high sulphur and one for low sulphur). Discharge rate 2,000 t.p.h.

Asia Kyoseki Pier No. 1 (Sea Berth) for VLCCs, depth alongside 19.6 m.; 2×16 in. connections. Max. unloading rate 10,000 k/l.p.h.

DENSITY: Inside harbour limit 1025. Outside harbour limit 1025.

FRESH WATER: Sea anchorage. No water barge available but usually brought from Onomichi (about 4 hrs. run to Sakaide). Rate of delivery 80 tons to 200 tons per hour dependent on barge.

Centre pier: can be supplied by shore line with capacity 25 tons per hour.

Mitsubishi Chemical Industries wharf: Can be supplied by shore line with capacity 60 tons per hour.

FUEL: All grades of bonded bunkers are stocked in Tokyo, Ise Bay, Osaka and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at max. 7 days prior notice.

FIRE PRECAUTIONS: No specific precaution.

DEVELOPMENTS: There is a Sea-Berth under construction.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per gang per hour depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificate sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore, but no spirits.

CARGO GEAR: See "Certificates", but no special requirements.

CONSULS: None. See "Kobe".

REPAIRS: Only minor repairs.

DRY DOCKS: Kawasaki Heavy Industries Ltd., Sakaide, which is suitable to dry dock. Dock No. 2 for 500,000 d.w.t. vessel. 450 m.×72 m.×12.3 m. Not yet in action for ship repairs. Only used at present for ship building and after services.

REPATRIATION: Possible.

AIRPORT: No airport. Nearest Takamatsu, All Nippon Airways 11 flights to Osaka and one to Tokyo.

TIME: GMT plus 9. No alterations made to clocks during year.

HOLIDAYS: National Holidays – see "Niihama". Local Holidays: New Year's Day (Lunar Calendar) January 30th; May Day May 1st; Memorial Day of the Sea July 20th; Bon Festival August 8th.

No ship's movement can be effected on January 1st, 2nd and 3rd, August 8th and October 15th.

POLICE/AMBULANCE/FIRE: Police 110; Ambulance 119; Fire 119. Sakaide Maritime Safety Base, 6–2858.

TELEPHONES: No facilities for placing telephones on board.

GENERAL: Mitsubishi Chemical Industries Co. Ltd., Sakaide Works. As wharf of above works located outer harbour limit of Sakaide port, the undermentioned procedures required: In conformity with regulations, vessel required to get special permission for entering into closed port, which will be given from Shikoku Maritime Bureau.

Customs request vessel calls Mitsubishi Chemicals wharf to obtain special permission for entering. If tonnage dues paid prior arrival, this procedure will be attended to by Agent.

Waiting anchorage: Avoid Bisan Seto Boundary according to special water zone navigation order. Imperative to exclude water surfaces with established Fishery Privilege.

Vessels waiting to berth at centre pier are lightened at anchor.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port Administration Office.

AGENTS: See "Niihama".

SAKATA: 38.57 N. 139.48 E. (See Plan Book)

Located at mouth of Mogami River. Strong wind blows from Japan Sea November to March.

In Winter season, wave height between 3 to 5 m., length 70 to 80 m. and period 7 to 10 seconds. Current South to North along coastline at 0.15 m. sec.

TIDAL RANGE:

Higher high water	+40 cm.
Spring tide high water	+28 cm.
Neap tide high water	+24 cm.
Mean sea level	+20 cm.
Neap tide low water	+16 cm.
Spring tide low water	+12 cm.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Stores List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc., (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory but required. Order Pilot through Agent. Pilot boards about 600 m. off port entrance. In bad weather, wait instructions from Agent.

ANCHORAGE: All sea areas available for anchorage. No prohibited anchorage areas. Pilot station and quarantine anchorage position 38° 56.5′ N., 139° 48.0′ E.

RESTRICTIONS: Ship movements in daytime only.

MAX. SIZE: Restricted by depth alongside West Pier, 10 m.

HEALTH: At first port of call in Japan, vessel must obtain free pratique. Quarantine Officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera-infected area within 10 days, Captain must advise crew and passengers' health condition to respective Quarantine Office through ship's Agent prior to arrival and close all soil pipes before entering port.

RADIO: Niigata. Call sign JCF. Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which covers all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: One of 800 h.p. and one 2,000 h.p.

BERTHING:

Name	*Depth*	*Length*	*No. Berths*
East Pier	7.5 m.	260 m.	2
West Pier	10.0 m.	185 m.	1
Ohama Pier	9.0 m.	330 m.	2
Sodeoka Pier	7.5 m.	390 m.	3
Buoy (Logs only)	10.0 m.	230 m.	1
Kominato Wharf	10.0 m.	370 m.	2
Sumikei Wharf (Private)	10.0 m.	260 m.	1

STEVEDORES: Working hours: 0800 to 1700 hrs.

Phosphate rock in bulk handled at a rate of 200 to 250 t.p.h by shore cranes.

Logs, 1,400 cu.m. per day are handled by ship's gear.

Rice, 900 to 1,000 tons per day loaded by ship's gear.

Manganese ore in bulk, 150 t.p.h. by shore crane, 120 t.p.h. by truck crane, 60 t.p.h. by ship's gear.

MEDICAL: No advance notice required unless urgent. Medical facilities available at Sakata City Hospital.

TANKERS: Draft not to exceed 8.5 m.

FRESH WATER: Available only from wharf at a rate of 25 t.p.h.

FUEL: Bunkers lightered from Hakodate provided at least 7 days' notice given.

GANGWAY/DECK WATCHMEN: Not specially required, unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCES: 200 cigarettes and three bottles of spirits per man.

CONSULS: Korean Consulate Tel. 0222–21–2751. Consul: Mr. Cho Kian.

REPAIRS: Minor repairs only.

REPATRIATION: Crew replacement conducted basis "landing for transfer to another vessel".

AIRPORT: Yamagata Airport, situated 105 km. from Sakata. Two flights per day.

TIME: GMT plus 9 hours. No alterations.

HOLIDAYS: Public offices closed on Sundays and National holidays. Cargo work every day except 1st, 2nd and 3rd January.

POLICE/AMBULANCE/FIRE: Police (urgent) 110; (usual) 2–6611; Ambulance (urgent) 119; Fire (urgent) 119; (usual) 2–3214.

TELEPHONES: No facilities for placing on board.

SERVICES: Compass adjustment.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 day extensions possible if ship stays longer.

AUTHORITY: Sakata Port Management Body.

AGENT: Sub-agent of Dodwell & Co., Tokyo. Sakata Kairiku Unso Co., Ltd., P.O. Box 35, 6–19, 2-chome, Funaba-cho, Sakata-shi, Yamagata-ken. Cable Address: Kairikusakata Sakata. Domestic Telex: 8733–08, Tel.: Sakata (0234) 22–1801.

SASEBO: 33.10 N. 129.43 E. (See Plan Book)

DOCUMENTS: See "General – Customs and Immigration".

PILOTAGE: Compulsory. Vessel should keep Pilot closely advised through Agent, of ETA Pilot station at least 24 hrs. prior arrival and any subsequent change. Pilot boards vessel 1 mile N.W. Kogosaki lighthouse. (33° 06′ N. 129° 38′ E.). In bad weather, Pilot will board at 33° 05′ 48″ N. 129° 40′ 24″ E.

Telegraphic address of Port Captain "JNK" 500 kc/s (Sasebo Maritime Safety Office).

ANCHORAGE: Ample good holding ground in inner harbour, but is controlled by U.S. Navy and only following anchorage available for commercial vessels: No. 3 Section, Depth 10 m.-37 m. Capacity (g/t) 20,000 tons and over × 20.

RESTRICTIONS: Entry and departure from sunset to sunrise only allowed under extenuating circumstances subject to Port Captain's special permission (MSTS chartered vessels excepted). No particular restrictions upon draft or tide conditions. Berthing during day only. Controlling depth of water – in the passage 23-54 m., at anchorage 10-37 m.

WEATHER: South-westerly winds prevail in Summer, while Northerly blows frequently in other seasons. Max. wind velocity recorded 26.1 m/sec. In early Spring dense fog prevails, but renders navigation impossible only for 7 days or so.

Tidal range 2.6 m. Current rate max. 1.5 knots in vicinity of harbour entrance at rising tide. At ebb tide, it flows in opposite direction and is faster than during flood, but not so strong as to hinder navigation.

MAX. SIZE: See "Berthing". No particular limitation for entering port. For berthing however, acceptable length, draft and breadth will be decided case by case in accordance with conditions of each berth consulting with Pilots, U.S. Navy and Port Captain. No tanker installations outside port.

HEALTH: See "Moji". Quarantine station: 33° 05′ 30″ N., 129° 42′ 00″ E. 1.5 mile East of Kogosaki lighthouse. Quarantine service from sunrise to 1 hour before sunset. "Q" flag should be hoisted until free pratique granted. When vessel arrives from plague and cholera infected or suspected area within 10 days (plague) and 5 days (cholera), 24-hour special quarantine required. All sanitary scuppers must be closed and garbage not thrown overboard after vessel reaches 60 miles off Japanese coast. Vessel chartered by MSTS or USN (GAA, T/C, CVC, V/C) shall be cleared by U.S. Navy Quarantine and service available after sunset also.

RADIO: See "Yokohama".

TUGS: Normally join vessel about 0.5-1 hour prior berthing and tug's lines used. Charge for use of lines included in tug hire.

BERTHING:

Wharf	Length m.	Depth	Capacity (g/t)	Cargo	Remarks
Iorizaki	80.5	32′	20,000×1	Oil	Under U.S. Navy's control
Motofune No. 1	79.5	32′	20,000×1	,,	,, ,, ,,
Motofune No. 2	79.5	32′	20,000×1	,,	,, ,, ,,
Akasaki No. 1 & 2	298.0	40′	20,000×2	,,	,, ,, ,,
Akasaki No. 3	219.0	40′	20,000×1	,,	,, ,, ,,
Yokose	88.0	45′	20,000×1	,,	,, ,, ,,
India Berth No. 1	254.4	31′	20,000×1		For repairs
,, ,, No. 2–3	363.5	31′	20,000×2	Repairs	
,, ,, No. 4–6	575.5	31′	20,000×3	Repairs and general cargo	
,, ,, No. 7–8	363.5	31′	20,000×2	General cargo	
,, ,, No. 9	151.5	31′	20,000×1	General cargo	

No. 1–5: Exclusive use of SSK (Shipyard)

No. 6–9: Under control of the U.S. Navy. No. 6 and 7 berths can be used for commercial vessels, subject to the U.S. Navy's permission.

Wharf	Length m.	Depth	Capacity (g/t)	Cargo
Maehata Gaibo No. 1	185.0	33′	20,000×1	Grain and general cargo
Ekiura Wharf	150.0	16′	1,000×2	General cargo
Hizukushi Wharf	103.0	15′	500×2	,, ,,
Maehata Wharf	143.0	15′	500×3	,, ,,
Maehata Gaibo No. 2	190.0	36′	25,000×1	Grain and general cargo

No. of Buoy	Depth	Capacity (g/t)
10		Over 10,000
23	9–23 m.	5,000 to 10,000
7		Under 5,000

These buoys also controlled by U.S. Navy and their use for commercial purposes subject to U.S. Navy's permission, except following buoy which is free for commercial vessels:

	Depth	Capacity (g/t)
No. 9	27 ft.	5,000×1

STEVEDORES: Maximum 10 gangs available.

Classification	Regular employees	Temporary labourers
Stevedores	100	150
Longshoremen/Warehousemen	100	200

2 shifts: 0800–1700 and 1800–0700 hrs. Normal working hours: 0800–1700 hrs. Overtime work possible by applying to Customs. No work can be arranged during New Year holidays (1st to 3rd January), 31st December and 1st May.

TANKERS: Diameter of lines: 8 in. No slop (Residue) discharge facilities. Number of tanker berths as follows:

Berth	Length	Depth	Remarks
Akasaki No. 1, 2, 3.	517 m.	40′	under U.S. Navy's control
Motofune No. 1 & 2.	159 m.	32′	under U.S. Navy's control
Iorizaki	80.5 m.	32′	under U.S. Navy's control
Yokose	88 m.	45′	under U.S. Navy's control

DENSITY: 1025.

FRESH WATER: Available by barge 1 each of 200 and 100 tons. Rate of delivery 30-60 t.p.h./barge. Water from hydrant at India Berth Nos. 6, 7, 8 & 9. Rate of delivery 25 t.p.h./hydrant.

FUEL: No stock of bonded oil, but lightered from other ports. Adequate notice required order avoid delay. Rate of delivery from barges 100/200 t.p.h.

Suppliers	Installation	Notice required days
Shell Sekiyu K.K.	Nagasaki	3
	Shimonoseki	4
Esso Oil Co.	Shimonoseki	4
	Sakai	6
Mobil Oil Co.	Kokura/Moji	4
	Oita	5
Caltex Oil Co.	Shimonoseki	4
	Kudamatsu	5
Mitsubishi Shoji Kaisha	Shimonoseki	4
	Kanokawa	5
C. Itoh & Co.	Matsuyama	5
	Mizushima	5
Nissho-Iwai Co.	Shimonoseki	4
	Matsuyama	5
Mitsui Bussan Kaisha	Oita	5
Kanematsu-Gosho Co	Kokura	4
Idemitsu Kosan Kaisha	Tokuyama	5
Marubeni-Iida Co.		
Sumitomo Shoji Kaisha	Tokuyama	5

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES; Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo maintenance appears to be poor.

CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.

CARGO GEAR: Shore cranes:

No.	Capacity	Location	Owners
1	250 tons	India Berth No. 5	S.S.K.
2	15 tons	India Berth No. 3 & 4	S.S.K.
1	15 tons	India Berth No. 7 & 8	U.S. Navy
2	10 tons	India Berth No. 1 & 4	S.S.K.
1	1 ton	Hizukushi Wharf	Nishi Kyushu Whse. Co.
1	4 tons	Maehata Wharf	Sasebo City

Floating cranes:

No.	Capacity	Owners
1	15 tons	S.S.K.
1	12 tons	S.S.K.

IDENTIFICATION CARDS: See "General – Immigration".

CONSULS: None.
REPAIRS: All deck and engine repairs possible.
DRY DOCKS: Sasebo Heavy Industries Co. Ltd. No. 3, dry dock: Length 370 m. Width 70 m. Depth 15 m. Max. ship (d.w.t.) 300,000. Another 5 dry docks available.
AIRPORT: Itazuke Airport, Fukuoka, about 120 km. (about 220 min. by taxi). Served by regular airlines. Nagasaki Airport, Nagasaki, about 50 km. (about 70 min. by taxi). 7 flights daily (All Nippon Airways).
TIME: GMT plus 9 hours. No alterations to clocks throughout year. **POLICE/AMBULANCE/FIRE:** Police Station: Sasebo 23-7161 (if emergency: 110). Ambulance Sasebo 23-5121 (Sasebo Fire Station). Fire Sasebo 119 (Sasebo Fire Station).
TELEPHONES: No facilities exist for placing telephones on board.
GENERAL: *Customs:* When vessel arrives direct from foreign port, Customs officials board for search. Following documents to be submitted. Crew List, Passenger List, Store List, Manifest of crew personal effects (must be signed by individual crew member). Arms and ammunition List, Narcotics List, List of Port of call on current voyage, Discharging Cargo Manifest, Through Cargo Manifest, Declaration inward/outward (Form No. C2000). Following will be checked on board. Ship's Registry, Last port clearance.

When vessel comes from Japanese port, Customs officals will not attend on board, except special case. Master or Agents to attend at Customs House for entry formalities with following documents. Discharging Cargo Manifest, Through Cargo Manifest, Declaration inward/outward, Ship's Registry, Last Port Clearance, documents entrusted with the Master by Customs at previous port.

On vessel's departure, clearance issued by Customs after confirming payment of tonnage dues.

Immigration: Immigration officials board vessel on arrival to examine passports, discharge books and/or other equivalent travel documents and provide a 72-hour landing pass for crew members and passengers. Two copies each of crew list and passenger list are required by them. Providing vessel's Agent with these documents beforehand will help in expediting immigration business on arrival. When vessel in port more than 72 hours, landing passes will be extended every 72 hours on application.

In event that crew members, without entry visas, to be landed for repatriation or transfer, Immigration will not permit their landing unless passage, by either sea or air, ensuring prompt departure from Japan (within 72 hours) of these men has been booked, or unless vessels to which they are to be transferred, arrive in Japan within 5 days. Services are rendered from 0900 hrs. to 1700 hrs.
MEDICAL: Hospital: U.S. Station Hospital (for U.S. military personnel only). Sasebo Dojinkai Hospital. Bussaka Dental Hospital. Tanaka Dental Hospital.
SERVICES: Hold cleaning. Compass adjusting. Fumigation.
AUTHORITY: Sasebo Harbour Administration.
AGENTS: Sub-agents of Dodwell & Co. Ltd., Tokyo. Nishikyushu Warehouse Co. Ltd., Tategami-cho, Sasebo-shi, Nagasaki-ken. Tel. Sasebo (0956) 24–6161. Telegraphic "Ringer Sasebo".

SHIMIZU: 35.01 N. 138.31 E. (See Plan Book)

DOCUMENTS: *Quarantine* (only when arriving from a foreign port):
1 Maritime Declaration of Health.
1 Crew List.
1 List of Passengers (if any on board).
Log Book and Registry, Certificate of Vaccination and Deratting Certificate (or Deratting Exemption Certificate) should be readily available.

Customs:
1 Declaration Inward/Outward of vessel.
1 Ship's Registry.
1 Last Port Clearance.
1 Store List including arms and narcotics.
2 Manifests of Cargo for discharge (prepared by Agents).
1 Manifest of Through Cargo.
1 Crew List.
1 List of Passengers.
1 Declaration of Crew's Baggage (only necessary if crew-members have to land personal effects ashore).
1 Parcel List.

Immigration:
2 Crew Lists.
1 Application for Shore-passes.
2 Lists of Passengers.
1 Declaration Inward/Outward of vessel.

Harbour Master:
1 Declaration Inward/Outward of vessel.

Port Authority:
1 Declaration Inward/Outward of vessel.

PILOTAGE: Pilotage should be arranged through Agent by VHF (Shimizu Port Radio, Channel 16, 12, 14, 20), or vessels requiring Pilot should hoist signal flag 'G'. Pilot Station: on the point 043° – 1500 m. from Shimizu Lighthouse (the lighthouse: 35° 00′ 24″ N. 138° 32′ 00″ E.)
ANCHORAGES: See Section 3 on Chart of Shimizu.
MAX. SIZE: Dry-cargo max. draft 12 m. Length and breadth no restriction.
HEALTH: Free pratique automatic calling at another Japanese port. Radio Pratique available.

RADIO:

Mode	Name of Station Call sign	Transmitting Frequency (kHz)	Class & Power (W)	Working Hour	Receiving Frequency	Use
MF	Shimizu Radio JGQ	500	A1 250 A2 550	H24	Public Telegram 468 kHz	Call & Reply
		486	A1 250 A2 550		Harbour Service 480 kHz	Communication
		512	A1 250 A2 550			Call & Reply

VHF:

Name of Station	Frequency (Channel No.)	Class & Power (W)	Type of Operation	Use
Shimizu Port Radio	16	$F_3$50	Simplex	Call & Reply
	12		Simplex	Communication (priority for urgency)
	14		Simplex	Communication
	20		Duplex	Communication

TUGS: Normally join in-coming vessels near Pilot station. Tug's lines usually used no extra charge.
BERTHING: See Table page 557.

CARGO HANDLING FACILITIES:

Wharf	Type	Capacity	Number
Okitsu No. 2 Wharf	Gantry (travelling)	30.5 tons	2
	Transtainer (travelling)	30.5 tons	2
Sodeshi No. 1 Wharf	Belt-Conveyer	140 t.p.h.	2
Sodeshi No. 2 Wharf	Unloader	400 t.p.h.	2
	Belt-Conveyor	1,000 t.p.h.	2
Shimizu Wharf	Jib Crane (portable)	3 tons	1
	Belt-Conveyor	150 t.p.h.	1
Hinode Wharf	Jib Crane (portable)	5 tons	1
	Jib Crane (fixed)	50 tons	1
Fujimi Wharf	Unloader (fixed)	180 t.p.h.	3
	Pneumatic unloader (travelling)	300 t.p.h.	2
	Belt-conveyor	450 t.p.h.	1
	Cement Unloader	470 t.p.h.	1
Suzuyo Warehouse Wharf	Pneumatic Unloader (fixed)	80 t.p.h.	1
	Pneumatic Unloader (fixed)	50 t.p.h.	1
Honen Oil Dolphin	Pneumatic Unloader	156 t.p.h.	2
	Pneumatic Unloader	300 t.p.h.	1
Nihon Light Metal Wharf	Unloader	150 t.p.h.	2
	Air Slide	150 t.p.h.	1
	Loading Arm	1,400 t.p.h.	1
	Loading Arm	500 t.p.h.	1

SPECIAL CARGO HANDLING FACILITIES:
Container Berth: Okitsu No. 2 wharf No. 11 – No. 12, depth 12 m. length 440 m. (2 berths), 2 gantry cranes (capacity 30.5 tons each), 2 transtainers (capacity 30.5 tons each).
TANKERS: Toa-Nenryo Sea-Berth (7 berths); max. permitted draft 22 m., max. capacity 250,000 d.w.t. Diameter of discharge lines; 16 in. and 32 in.
STEVEDORES: Normally latest time to order gangs 1500 hrs. previous day.
MEDICAL: No advance notice required unless urgent.
DENSITY: 1023–1024.
FRESH WATER: Most berths supply by shore installations, otherwise barge.
FUEL: All grades of oil delivered by barge only.
FIRE PRECAUTIONS: Harbour fire-fighting corps with a fire-fighting boat.
GANGWAY/DECK WATCHMEN: Service of watchmen optional but not necessary.
OPENING/CLOSING HATCHES: Opening and closing of hatches may be done by Crew members or on request to Agent by stevedores.
CERTIFICATES: Ship Registry, Radio and Safety equipment Certificate, Derating Exemption Certificate, etc.
CUSTOMS ALLOWANCES: Tobacco: 60 cigarettes permitted. Wine or spirits, according to the length of voyage: none within 1 month voyage, 1 bottle over 1 month, 2 bottles over 3 months.
IDENTIFICATION CARDS: Passport or Seaman's Book.
CONSULS: None.
REPAIRS: Most repairs and overhauls possible.
DRY DOCKS: Kanazashi Shipyard (largest dry dock 120 m.× 18.6 m., 5,000 tons).
AIRPORT: 263 km. from Narita International Airport, 180 km. from Haneda.
TIME: GMT plus 9 hours. Permanent.
HOLIDAYS: No work from December 31 to January 3 and Shimizu Port Festival Day (Aug. 5).
POLICE/AMBULANCE/FIRE: Police 110; Ambulance 119; Fire 119; Water Police 52-0200.
TELEPHONE: Available on board, cost of connection: 45,000 yen plus actual expenses.
SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days but 3 days extension possible if ship stays longer.
DEVELOPMENTS: Sodeshi No. 1 wharf is under construction. Planned or scheduled completion date is 1980. This wharf will be provided with 4 berths for 30,000 d.w.t. class vessels (water depth 12 m.) and 5 berths for 5,000 d.w.t. class vessels (water depth 7.5 m.). Specially for container ships a 720 m. long straight berth is

BERTHING:

Public wharf	Berth	Depth (m.)	Length (m.)	Max. Size (d.w.t.)	Main Usage
Okitsu No. 1 Wharf	No. 2 – No. 3	10.0	370	15,000	General Cargo
Okitsu No. 2 Wharf	No. 4 – No. 5	5.5	181	2,000	General Cargo
	No. 6 – No. 9	10.0	740	15,000	General Cargo
	No. 10	7.5	168	5,000	General Cargo
	No. 11 – No. 12	12.0	440	30,000	Containers
	No. 13 – No. 14	10.0	370	15,000	Automobiles
Sodeshi No. 1 Wharf	No. 1 – No. 4	4.5	240	700	
	No. 5	7.5	135	5,000	
	No. 6 – No. 7	12.0	450	30,000	
	No. 12 – No. 15	7.5	520	5,000	
Sodeshi No. 2 Wharf	No. 16	10 – 12	330	30,000	Wood-chips
	No. 17	9.0	165	10,000	Petroleum
	No. 18	7.5	72	1,000	Petroleum
Ejiri Wharf	No. 1 – No. 5	6.5	472	3,000	Fish & Shell
	No. 6 – No. 7	4.5	149	700	Fish & Shell
	No. 8 – No. 12	4.5	149	700	Fish & Shell
	No. 13 – No. 16	4.5	262	700	Fish & Shell
	No. 17 – No. 18	6.5	185	3,000	Fish & Shell
Shimizu Wharf	No. 1 – No. 5	4.5	323	700	Steel materials Soybean Grounds
Hinode Wharf	No. 1 – No. 2	7.3	226	5,000	General Cargo
	No. 3	9.0	183	10,000	General Cargo
	No. 4 – No. 5	10.6	411	20,000	General Cargo
Fujimi Wharf	No. 1 – No. 2	4.5	120	700	Ballast, Sand
	No. 3 – No. 4	9.0	330	10,000	Wood-chips
	No. 5	11.0	185	20,000	Grain, Cement
	No. 6 – No. 7	9.0	329	10,000	Sugar, Raw Cotton
Anchorage Mooring Basin Buoy	Orido	5.0–10.5	344, 100 m.^{2} 3 Buoys	10,000 – 20,000	
Anchor Ground	Sodeshi	4.5	81,400 m.^{2}	Under 700	
Private:					
National Railway Wharf		7.3	266	5,000	Cement
Toa Nenryo Sea-Berth		22.0		250,000	Crude Oil, Petroleum
Honen Oil Dolphin		11.0		40,000	Grain, Molasses
Suzuyo Warehouse Wharf		4.5	48	700	Grain
Suzuyo No. 1 Pier		5.0	27	1,000	Petroleum
Nihon Light Metal Wharf		8.0–11.0	410	32,000	Bauxite Ore, Alumina, Heavy Oil
Nakayama Steel-Works Wharf		5.0	41	1,000	Steel Materials
Nippon Kokan Wharf		4.5–6.5	892	34,000	
Kanazashi Shipyard Wharf		4.5–5.5	490	20,000	
Miho Shipyard Pier		5.5–6.0	277	8,000	
Kowan Dock Pier		7.0	20	500	

under construction. It will be equipped with 3 gantry cranes. Total area of this wharf is 410,00 sq.m. of which 120,000 sq.m. of the East side will be allotted as a container yard.

SHIPMASTER'S REPORT: 1976.

Vessel 250,000 d.w.t., proceeding to Tonen Sea Berth.

Suggest "End of Passage" about 10–15 miles North of Omea Saki Light. Fairly high density traffic, particularly South of entrance to Suraya Wau.

Suraya Wau can be entered at any time day or night.

Pilot boards 1,500 m. 043° from Fukiai Light.

Deep draft signals to be displayed including the red flashing light.

Berthing/unberthing during daylight hours only.

Four tugs used, all with own lines with eye on the bitts. Vessel berthed port-side alongside heading 016° (T). Moorings used: 4 headlines, 3 breast lines and 2 springs, similar moorings required aft. Excellent shore gangway provided. Loading arms: 4×16-in. Chicksan.

A spill boom is placed around the vessel whilst alongside. Safety and pollution regulations placed onboard on arrival. Tape recording of the Terminal regulations played over the ships P.A. system before discharge commences. The Terminal representatives hold a safety meeting on board prior to discharge with the Master, Chief Engineer and Chief Officer.

Ullaging is witnessed by shore staff, samples and water dips taken.

Shore liberty boat arranged by Agent, journey ashore takes about 15 minutes.

AUTHORITY: Shimizu Port Administration Office.

AGENT: Sub-Agent of Dodwell & Co. Ltd. Suzuyo & Co., Ltd. 12, 3-chome Irifune-cho, Shimizu-shi, Shizuoka-ken. Cable Address: Suzuyo Shimizu. Domestic Telex: 3965-671, 672, 677 Suzuyo Smz. Tel.: Shimizu (0543) 53-3111/3914 and 52-1398.

SHIMONOSEKI (including Mutsure):

33.57 N. 130.58 E. (See Kanmon-Ko) **(See Plan Book)**

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agents should be provided with necessary information about details of cargoes in advance.

PILOTAGE: See "Moji".

ANCHORAGE: Nishiyama anchorage located off Hikoshima Island, on Western end of Honshu Island. Max. draft 9.5 m. capacity 10,000×2.

Mutsure anchorage: undermentioned area is open port. The sea area surrounded by:

(*a*) Line connecting Daibahana on Takenoko Island and top of Wagora Island.
(*b*) Line connecting top of Wagora Island and Udonohama on Mutsure Island.
(*c*) Coastline between Udonohama and Unoishibana on Mutsure Island.
(*d*) Line connecting Unoishibana and Anse-no-Shiri in Shimonoseki.
(*e*) Line connecting Anse-no-Shiri and point at 370 m. from Daibahana on the line connecting Daibahana and top of Wagora Island.
(*f*) Line Long. 130° 54′ E.

Anchorage includes a part of quarantine anchorage and Mutsure oil berth; depth 10-25 m.

RESTRICTIONS: See "Moji".

MAX. SIZE:

Wharf	Numbers	Length	Depth	Capacity (g/t)
Western wharf	(3–4)	340 m.	6.5 m.	15,000×1
Daiichi Pier	(9–10)	330 m.	8.5 m.	24,000×1
	(12)	330 m.	8.0 m.	13,000×1
Daini Pier	(15–16)	340 m.	8.5 m.	15,000×1
	(17)	210 m.	9.1 m.	25,000×1
	(18–19)	260 m.	7.0 m.	5,000×2
	(20)	185 m.	9.0 m.	13,000×1
	(21)	185 m.	9.4 m.	13,000×1
	(24)	185 m.	9.5 m.	15,000×1
	(25)	185 m.	10.0 m.	15,000×1

For tank installations, see "Tankers".

HEALTH: See "Moji".
RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically West bound vessel to Choshi and North bound to Nagasaki Radio respectively.
VHF: See "Yawata".
TUGS: See "Moji".
BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.
BRIDGES: Kanmon Suspension Bridge was built in 1973 across Hayatomo Channel (narrowest place in Kanmon Strait, width of fairway 530 m.) between Shimonoseki and Moji. The height of the bridge from sea level is 61 m.
STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agents to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.
MEDICAL: No advance notice required unless urgent.
TANKERS: Shell oil berth situated at Hikoshima, on Southwestern end of Honshu, facing Moji across Kanmon Strait. In vicinity of berth, flood tide sets to East, ebb tide to West, current about 5-6 knots. Mooring berth consists of 4 buoys, approximately 140 m. offshore, space between buoys being approximately 270 m.

Max. dimensions of vessel which can be safely accommodated are 18,000 d.w.t., length OA 170 m., breadth unlimited, draft 9 m. Product handled, fuel oil. Shoreline 1×8 in. Discharge rate 500 t.p.h.

Vessels only berthed or unberthed when tide sets to West during daytime only. In approaching berth, as vessel comes against tide, full engine power and tug assistance required. One 10 in. pipe connected to vessel; discharge efficiency per hour 500-600 kl.

Nissin Tanker Pier located about 610 m. South of Mutsure lighthouse. At this berth, West-going current stronger than East-going and ship taken to berth only on Westerly current, with stern towards South. Most suitable berthing time is 2-3 hrs. after commencement of West-going current. Max. dimension of vessel which can be accommodated at this berth is 100,000 d.w.t., LOA 250 m., draft 11 m. Product handled, fuel oil. Shoreline 2×8 in. Discharge rate 1,500 t.p.h.
DENSITY: 1025.
FRESH WATER: Good fresh water supplied either from water barge or from hydrants alongside wharves. Rate of delivery from water barge 50 t.p.h. and from hydrants 40-50 tons.
FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice. Also see "Moji, Fuel".
DEVELOPMENTS: At present, No. 18 wharf, mostly reclaimed land, used for ferry boat service linking Shimonoseki to Pusan, which opened service June 1970. After completion of reclamation, further 3 berths (Nos. 19, 20 & 21) will be equipped for larger vessels, where maximum draft planned 10 m.
GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.
OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can can complete it before berthing.
CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.
CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore, but no spirits.
CARGO GEAR: See "Certificates", but no special requirements.
CONSULS: Korean Consul, Tel. (66) 5341.
REPAIRS: All types of repairs possible.
DRY DOCKS: Mitsubishi Heavy Industries Ltd. 4 dockyards (Nos. 3 & 4 for smaller vessels).
Hayashikane Shipbuilding K.K. 3 dockyards (Max. 1,100 g.t.).
Towa Shipbuilding K.K. 1 dockyard (Max. 1,000 g.t.).
Mitsubishi Heavy Industries Ltd.
Dimensions of dock

	Length m.	*Breadth m.*	*Draft m.*
No. 1 Dock	164.13	25.0	7.04
No. 2 Dock	150.10	20.0	6.88

Max. size of vessel for docking

	Length m.	*Breadth m.*	*Draft m.*
No. 1 Dock	160.00	22.50	5.50
No. 2 Dock	143.00	19.30	5.00

REPATRIATION: Possible.
AIRPORT: Approx. 80 km. to Fukuoka airport; about 1.5 hrs. by train. Approx. 18 km. to Kitakyushu airport; 40 minutes by taxi.
TIME: GMT plus 9. No alterations made to clocks during year.
POLICE/AMBULANCE/FIRE: Police station 110; Ambulance/Fire Station 119.
TELEPHONE: Possible to place telephone on board.
SERVICES: All services available.
SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.
AUTHORITY: Port and Harbour Bureau.
AGENTS: See "Moji".

SHIMOTSU (including Kainan): 34.06 N. 135.08 E.

DOCUMENTS:
Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agents should be provided with necessary information about details of cargoes in advance.
PILOTAGE: Pilot request to be given to pilot station through Agent. Advance notice of ETA: 72 hours and 24 hours before arrival. No VHF available. Pilot usually attends by tug boat. No special pilot boat. Pilot boards 34° 07′ 25″ N. and 135° 06′ 45″ E. No alternative area in event of bad weather. Location of anchorage for awaiting pilot – 34° 07′ 25″ N. and 135° 06′ 45″ E., as pilot station.
ANCHORAGES: Quarantine anchorage, 20 m. depth.
RESTRICTIONS: Entry daytime only.

Yura Bay: Vessels no longer than 110 m. berth. Daytime entrance only regardless of tide and current.
MAX. SIZE:

	Max. d.w.t.	*Length*	*Draft*
Tonen O-1	236,000	No limit	18.50 m.
Tonen E-1	70,000	No limit	12.50 m.
Maruzen Buoy Berth	35,000	230 m.	9.50 m.
Maruzen Jetty 5	50,000	250 m.	11.60 m.
Fuji Kosan Jetty 9 (Kainan)	70,000	250 m.	12.50 m.
Fuji Kosan Ohsaki Sea Berth	245,000	—	24.00 m.

Also see "Tankers".
HEALTH: Radio pratique available.

Formalities will be carried out at the undermentioned positions which will be specified by Harbour Master.
1. 34° 07′ 09″ N., 135° 06′ 20″ E.
2. 34° 08′ 09″ N., 135° 06′ 28″ E.
3. 34° 08′ 25″ N., 135° 05′ 47″ E.
4. 34° 08′ 33″ N., 135° 06′ 49″ E.
5. 34° 09′ 00″ N., 135° 06′ 29″ E.
6. 34° 08′ 48″ N., 135° 07′ 30″ E.
7. 34° 09′ 14″ N., 135° 07′ 27″ E.

RADIO: Recommended Captain communicates with Agents through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound, to Choshi, and Northbound, to Nagasaki Radio respectively.
TUGS: Tugs join at Quarantine anchorage, tug lines used.
BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agents mainly by radio.
MEDICAL: No advance notice required unless urgent.
TANKERS: There are no slop facilities.

Berth	*Product*	*Shorelines*	*Discharge Rate t.p.h.*
Tonen O–1 Jetty	Crude Oil	2×12 in. 3×16 in.	12,000/4,500
Tonen E–1 Jetty	Crude Oil	2×12 in.	2,500
	Fuel Oil	1×10 in.	2,000
Maruzen No. 5 Jetty	Crude Oil	1×14 in.	1,500
Maruzen Buoy Berth	Fuel Oil	1×10 in.	500
	Lube Oil	1×10 in.	500
Fuji Kosan Jetty 9 (Kainan)	Crude Oil	2×12 in.	3,500
	Fuel Oil	2×10 in.	800

DENSITY: Average density 1012.
FRESH WATER: Available at every berth except Fuji Kosan Sea Berth, by shore lines, rate about 25 metric tons per hour. Also available by barge.
FUEL: Most grades of domestic and bonded oil are available. If bunkering is carried out at anchorage, guard boat and oil fence will be required by harbour regulations.
CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.
CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore, but no spirits.
IDENTIFICATION CARDS: Not required.
CONSULS: None.
REPAIRS: Only minor deck and engine repairs.
DRY DOCKS:

Yura Dockyard: Mitsui Shipping & Engineering Co. Ltd. have constructed a 350,000 d.w.t. new dockyard in Yura, 50 nautical miles South of Kobe 33° 57′ 30″ N. 135° 07′ 00″ E. Vessels calling at Yura port are requested to note the following information:

Tonnage dues should be paid at Wakayama since Yura is closed port.

Dock Master boards at position 280 degrees 2,000 m. from Arijima lighthouse for entering Yura and Pilot is not required.

Vessel is requested to wait at Wakayama Anchorage if dry dock or wet basin is not available.

Vessel is requested to call at Shimotsu for free pratique if necessary.
REPATRIATION: Possible.
AIRPORT: Osaka International Airport.
TIME: GMT plus 9 hrs. No alterations made to clocks during year.
POLICE/AMBULANCE/FIRE: Police 110 and Ambulance/Fire 119 (in case of emergency).
TELEPHONES: No facilities for placing telephones on board.
SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.
AUTHORITY: Port Administration Office.

AGENTS: Sub-Agents of Dodwell & Co., Tokyo: Shimamoto Kaiun K.K., Kowan Kaikan, 3066, Shimotsu, Shimotsu-cho, Kaisogun, Wakayama-ken. Cable address: Shimamoto Wakayama Shimotsu. Domestic Telex: 5542-749 Shima St. J. Tel: (07349) 2-0141.

SHIOGAMA (Including Sendai): 38.20 N. 141.03 E.

DOCUMENTS:
Ship's Register.
Last Port Clearance.
3 Crew Lists including passport numbers.
3 Passenger Lists.
1 Stores List.
1 Declaration of Crew's Personal Effects.

Agent should be provided with necessary information to prepare Inward/Outward Declarations and Cargo Manifests.
PILOTAGE: Not compulsory but can be arranged at request of Master. Pilot not available after dark. Pilot boards at Fairway Buoy "A", position 38° 13′ 15″ N. 141° 08′ 15″ E.
ANCHORAGE: Depth: 28 m. Bottom: Rock and sand. Anchorage not suitable in rough weather and as no sheltered anchorage nearby it is advisable for vessels to proceed offshore.
RESTRICTIONS: *For vessels entry into and sailing from Sendai:* Priority of entry and sailing from the port is given to ferries. Entry and sailing of other vessels is restricted to times outside ferry schedules. Entry of tankers controlled by Tohoku Oil Refinery Co. Ltd. under supervision of Harbour Master.
MAX. SIZE: See "Berthing".
HEALTH: Radio pratique available.
Sendai: Formalities will be carried out at the quarantine anchorage (38° 13′ 03″ N., 141° 06′ 42″ E.)
Shiogama: Formalities will be carried out at the quarantine anchorage.
RADIO: Choshi Radio or Nagasaki Radio.
BERTHING:
Sendai:

Berth	*Length (m)*	*Depth (m)*	*Permissible Draft (m)*	*Capacity (g/t)*	*Cranes (tons)*
Tohoku Oii Pier		18.0	17.0	150,000	
12 m. Public Berth	240	12.0	11.5	20,000	
10 m. Public Berth	185	10.0	9.5	18,000	
Azuma Seiko (Private)	300	12.0	11.5	20,000	2×30 1×10
Fujisawa Seiko (Private)	300	8.0	7.5	10,000	1×30

Shiogama:

Berth	*Length (m)*	*Depth (m)*	*Permissible Draft & Length*		*Capacity (g/t)*	*Shore Cranes*
			(m)	*Overall (m)*		
Teizen No. 1 (T.1)	160	9.0	8.5	170	18,000	
No. 2 (T.2)	160	9.0	8.5	170	15,000	
No. 3 (T.3)	130	7.5	7.0	120	10,000	
No. 4 (T.4)	130	7.5	7.0	120	10,000	
Higashi Wharf (E.1,2,3)	330	7.0	7.0	—	10,000	1×3 t.
Naka Wharf		7.5	7.0	130	5,000	1×2 t.
(E. side)(M. 4,5,6)	270	4.6	4.0		1,000	
Naka (W. side)(M. 7,8)	170	4.5	4.0	—	1,000	
Naka (N. side)(MN)	169	5.5	5.0	—	2,000	
Nishi Wharf (W)	326.6	4.5	4.0	—	1,000	

TANKERS: *Tohoku Oil LPG Pier:* Vapour Line: 1×8 in., Liquid line connection (Propane) 2×12 in., Butane 1×12 in., Depth alongside 17.0 m. Dolphin berth situated in 17 m. depth of water. Length between dolphins, 125 m.

Vessel discharges through two 16 in. Chiksan loading arms each capable of receiving 4,000 t.p.h. Also 1×8 in. Chiksan loading arm for bunker.

There are no facilities for dirty ballast.
Storage capacity:

Crude Oil:	102,000 K/L×5 55,000 K/L×1
Fuel Oil:	31,000×5

New Sendai Oil Pier: Report received August 1978.
Position: 38° 16′ N., 141° 02′ E.

Pilot available at quarantine anchorage, position 38° 13′ N., 141° 06′ E. Fresh water available. Depth alongside 18 m. Permissible draft 17.0 m. Max. size 150,000 g.r.t.
FRESH WATER: Supplied by shore line at 40 t.p.h.
FUEL: *Sendai:* Domestic oil is available; bonded oil also available from Tohoku Oil K.K.

Shiogama: Domestic oil is available; bonded oil will be brought from Yokohama or Sendai, when required.
TIME: GMT plus 9 hours. No alterations during the year.
DEVELOPMENTS: 15 public wharves under construction to accommodate vessels of 15,000 – 40,000 d.w.t. for discharging and loading of general and bulk cargoes. Depth alongside 10 – 12 m.
AUTHORITY: Port Administration Office.

AGENT: Okimiya Transport Inc. 13-24, 2-chome Minatomachi, Shiogama-shi, Miyagi-ken. Cable address: Oki Shiogama. Domestic Telex: 8592-49 Oki Inc. Tel: (02236) 4-1161. Postal No. 985.

TAGONOURA: 35.08 N. 138.42 E.

PORT LIMITS: Commences 5 cables from the harbour entrance. A vessel is considered an "arrived ship" at this point.
DOCUMENTS: As for "Shimizu".
PILOTAGE: Ordered 24 hours in advance through Agents. If possible vessels should obtain Japanese Chart 1075 for the approaches and Japanese Harbour Plan No. (P) 98. Two fixed green leading lights visible 13 miles lead the ship through the entrance on a bearing of 323.5° True. Vessels should approach on this transit until 1 mile off the breakwater entrance which is marked by an occ. G. 6 second 12 mile light on the West breakwater and a occ. R. 6 second 13 mile light on the East breakwater. The Pilot will board from a tug 1 mile from the entrance. 2 tugs will attend for the entrance transit.
ANCHORAGE: Due to the steep nature of the coast no roadstead anchorages are available. In the event of having to wait for Pilot or weather to moderate it is necessary to steam outside the entrance.
RESTRICTIONS: The allowable draft should be verified with the Agents before arrival as this does vary, the average being 6.5 m. alongside the berth. The entrance channel has a minimum depth of 9 m. at all times.
MAX. SIZE: LOA 600 ft., beam 100 ft. These extremes are likely to be increased as the port develops.
HEALTH: Radio pratique is available if vessel holds a valid Japanese Sanitary Inspection Certificate, if not then quarantine will be cleared at Shimizu.
RADIO: Chosi radio. When nearing Shimizu a call can be made via Shimizu Radio VHF requesting them to telephone ETA to Tagonoura Pilot.
TUGS: 2 tugs normally required. These are ordered from Shimizu in advance by Tagonoura Agents. The same applies on departure.
BERTHING:

Berth	*Length (m)*	*Depth (m)*	*Permissible Draft (m)*	*Capacity (g/t)*
Yoshiwara Wharf No. 1	167	9.0	9.0	10,000
2	125	7.5	7.5	5,000
Chuo Wharf 1 & 2	410	9.0	9.0	2×10,000
3 & 4	250	7.5	7.5	2× 5,000
5 & 6	120	4.5	4.5	2× 1,000
Asahi Kasei Wharf	170	9.0	9.0	10,000
(Private)	80	7.5	7.0	1,000
Fuji Wharf No. 1, 2 & 3	375	7.5	7.5	3× 5,000
4	115	6.5	6.5	3,000
Suzukawa Wharf	560	5.5		6× 2,000

SPECIALISED CARGO FACILITIES: Tagonoura handles bulk phosphates, etc. Also liquid chemical carriers and tankers.
BRIDGES: None.
STEVEDORES: Private arrangements. Working hours: Weekdays 0830–2130 hrs. Labour not available 1st and 3rd Sundays of each month or January 1st–3rd or August 4th.
MEDICAL: Hospital and immediate services available.
TANKERS: Specific details unknown.
DENSITY: 1021
FRESH WATER: Unlimited. Available on the berth, rate less than 15 t.p.h. cost Yen 100 per ton.
FUEL: All grades and lubricants available from Chiba and Toyko.
REPAIRS: Minor repairs only available.
DRYDOCK: None.
SURVEYORS: Available at short notice from Shimizu, all societies.
GANGWAY/DECK WATCHMEN: Available but not necessary.
HATCHES: Opened and closed by crew.
CUSTOMS ALLOWANCES: As per "Shimizu".
CARGO GEAR: Ship's gear.
REPATRIATION: Possible. Frequent train services to Toyko.
AIRPORT: Haneda, Toyko.
TIME: J.S.T. GMT plus 9 hours throughout.
TELEPHONES: Available on the wharf only.
SERVICES: All services available at short notice from Shimizu or Toyko.
SHORE LEAVE: Possible.
IDENTIFICATION CARDS: 3 day passes issued, extended if necessary.
GENERAL: Vessel called 26th June to 2nd July discharged 10,000 tons phosphate rock.
DEVELOPMENTS: Deepening of the harbour and further berth development is in progress.
AUTHORITY: Tagonoura Port Administration.

AGENTS: Sub-Agent of Dodwell & Co., Tokyo. Suzuyo & Co., Ltd. Tagonoura Office, 1-179, Suzukawa, Fuji-shi, Shizuoka-ken. Cable address: Suzuyotago Fuji. Domestic Telex: 3925-446. Suzuyo Tagonoura Fuji. Tel: (0545) 33-0310.

TANABE: 33.44 N. 135.21 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists, including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory, but if required Agent to be advised 72 hours prior arrival. No pilotage sunset to sunrise. Anchorage waiting for Pilot 33° 42′ N.; 135° 19′ E. Pilot station 2,200 m. 315° from Banshono-hana lighthouse. Depth, 38 m.

ANCHORAGE: Waiting anchorage, 1,900 m. 40° from Banshono-hana lighthouse. Depth, 19 m. Bottom, sand and mud.

RESTRICTIONS: Max. draft, 9.5 m. (31ft.), high tide. Usual draft, under 8.5 m. (28 ft.).

HEALTH: Vessels usually anchor in the port of Owase or Shimotsu, where the authorities board and grant free pratique.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: If required, ordered from Wakayama subject 3 days advance notice. Tug's line used, no extra charge.

BERTHING: 2 buoy-berths, depth 10 m. and 7.5 m.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700-1900 hrs. (50% additional of basic stevedorage), 2100-0500 hrs. next morning (130% additional). Sundays/holidays (60% additional).

MEDICAL: No advance notice required unless urgent.

DENSITY: About 1.03.

TIDE: Tidal range. Maximum plus 2.13 m. Minimum minus 0.21 m.

FRESH WATER: Available by water-barge, capacity 30 tons. Daytime delivery only to buoy berths. 48 hours notice required.

FUEL: Bonded oil will be brought from Shimotsu or Kobe, when required.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo aboard.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Minor repairs only.

AIRPORT: Shirahama Airport about 25 km. distant. Domestic flights only, daily to Tokyo, Osaka, and Nagoya.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Tanabe police office, tel. 0739-22-1226; Ambulance, Chu-o Hospital, tel. 0739-22-8383; Fire department, tel. 0739-22-0931.

SERVICES: None available locally but obtainable from Osaka.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port Administration Office.

AGENTS: Sub-agents of Dodwell & Co. Ltd., Tokyo. Shimamoto Kaiun K.K., 193 Kamiyashiki, Tanabe-shi, Wakayama-ken. Tel. Tanabe (0739) 24-2424. Telegraphic, Shimamoto Tanabe. Telex 5562-103.

TOBATA: 33.55 N. 130.51 E.
(See Kanmon-Ko).

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Compulsory. Harbour Pilots and Inland Sea Pilots are available at the Pilots station or quarantine anchorage. Mutsure Pilots station. Lat. 33° 59′ 30″ N., Long. 130° 53′ 00″ E.

ANCHORAGES: No. 5 Section, Wakamatsu. Depth: 9–11 m. Capacity (g/t) 15,000×2. Quarantine anchorages also used when necessary.

WIND/TIDE: South-easterly winds prevail in the warm seasons and North-westerly winds in the Winter season. The maximum velocity recorded in the past being 18 m./sec. The tidal range is 2.145 m. The current at the channel leading to new port runs Southward at the flood and Northward at the ebb. The maximum speed of the current is about 3 knots. There is no current in the dock.

RESTRICTIONS:

(a) Vessels exceeding 20,000 tons gross may berth only within one hour before and/or after slack tide. Vessel's under 20,000 tons gross may berth regardless of current, if it does not exceed 5 knots.

(b) Night entry: Vessels under 10,000 gross tons may berth at Nos. 1, 2, 3 and 8 wharves until 2200 hrs. in Summer season and 2100 hrs. in Winter season, subject to Harbour Master's permission and Pilot's agreement.

(c) Night departure: Vessels under 20,000 gross tons allowed to sail from Nos. 1, 2, 3, 8 wharves and Nos. "A", "B", "C" buoys until 2200 hrs., regardless of current, provided they are moored with bow outward.

(d) Least depth in channel, 14.0 m.

MAX. SIZE: See "Berthing".

HEALTH: Formalities will be carried out at the anchorage. Quarantine station 105° – 2,800 m., (800 m. square) from Mutsure Lighthouse.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Two tugs join vessel at entrance of harbour (in front of harbour signal station). Vessels exceeding 20,000 tons gross require 3 tugs. One of them will join vessel at Mutsure leading into main harbour and 2 join vessel at entrance of port (in front of harbour signal station).

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*LOA (m.)*	*Shore Cranes*
(Ore Pier)					
Wharf No. 1	200	10.5	10.5		4×30 t.
2	200	11.0	11.0		
3	250	13.0	13.0		
4		17.0	16.0	315	
(Coal Pier)					
Wharf No. 8	267	11.5	11.5	250	2×10 t.
9	267	9.5	9.5	170	
Buoy No. A		9.5	9.5	180	—
B		11.5	11.0	200	—
(Loading Pier)					
Uchiura No. 5 Wharf	190	8.5	8.5	175	1×25 t. 1×10 t.
Shoko Wharf Tobata	150	8.5	8.5	150	
Shin Nittetsu Kagaku (RI)		7.0	7.0	110	
Sakaigawa Public Wharf (RS)		7.1	7.0	120	
Hibikinada Mitsui Kozan Coking Ind.		13.0	12.2	250	

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. (50% additional of basic stevedorage), 2100–0500 hrs. next morning (130% additional), Sundays/holidays (60% additional).

MEDICAL: Kinjyo Hospital, Yawata; Shimada Surgical Hospital, Yawata. No advance notice required unless urgent.

DENSITY: Average density in the port is about 1019–1021 in Summer season, 1025–1026 in Winter season.

FRESH WATER: Available in connecting lines from shore side at wharves Nos. 1, 2, 3, 8, 9. No. of hydrant 5 4 5 5 5. At buoys: from barges, arranged from Wakamatsu. Rate of delivery: 55–70 t.p.h., ex-hydrant, 60 t.p.h., barge. Overtime (0500–0800 hrs.) (1700–2200 hrs.), 50% add.; (2200–0500 hrs.), 100% add.; bad weather, 50% add.; Sundays and holidays, 50% add.; minimum quantity at Tobata, 30 tons; minimum quantity at Mutsure, 50 tons.

FUEL: Domestic oil is available, bonded oil will be brought from Moji, Ube or Ohita with sufficient advance notice, when required.

FIRE PRECAUTIONS: No tanker berth. Each tugboat equipped with fire extinguishing system for attending emergencies on request.

DEVELOPMENTS: No. 4 Wharf completed. Depth of water about 17 m., but also 2nd plan for 19 m. Berthing capacity, over 150,000 d.w.t.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo aboard.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: See "Yawata".

REPAIRS: All types of deck and engine repairs possible afloat.

DRY DOCK: No dry dock.

REPATRIATION: Possible.

AIRPORT: See "Yawata".

TIME: GMT plus 9 hours. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Tobata Police Office, tel. 093-87-4321; Wakamatsu Water Police, Tobata Branch, tel. 093-87-1561; Ambulance/Fire: Tobata Fire Department, tel. 093-87-2621.

TELEPHONES: See "Yawata".

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Kitakyushuko Kanti-Kumiai.

AGENTS: Sub-agents of Dodwell & Co. Tokyo. Holme Ringer & Co. Ltd., 2nd Floor, Service Center Bldg., Outside West Gate, Tobata Works, Nippon Steel Corp., Kawashiro-cho, Tobata-ku, Kitakyushu-shi, Fukuoka-Ken. Cable Address: Ringer Tobata. Domestic Telex: Ringer Kik 7145–75. Tel.: (093) 861–0221, 871–1561 (Ext. 5678).

TOKUYAMA: 33.59 N. 131.45 E.

Port situated in Yamaguchi Prefecture on Western part of mainland, facing Seto Inland Sea. Surrounded by Oshima peninsula on the East, by Otsu-Shima and Uma-Shima (islands) on the S.W. and by the land on the North Forms a grand bay with deep water suitable for shelter. Sen-Shima and Kurokami-Shima (islands) lying in harbour, divide it into Tokuyama section and Tonda section.

DOCUMENTS:

(a) Customs. When vessel arrives direct from foreign port, Customs officials will board her for search. The following documents are to be submitted:

Crew List.
Passenger List.
Store List.
Manifest of Crew Personal Effects (must be signed by individual crew member).
Arms and Ammunition List.
Narcotics List.
List of Ports of Call on current voyage.
Discharging Cargo Manifest.
Through Cargo Manifest.
Declaration Inward/Outward (Form No. 02000).

The following will be checked on board: Ship's Registry, Last Port Clearance. When vessel comes from Japanese port, Customs officials will not attend on board, except special case. Master or Agent are to attend at Custom House for entry formalities with the following documents:

Discharging Cargo Manifest.
Through Cargo Manifest.
Declaration Inward/Outward.
Ship's Registry.
Last Port Clearance.
Documents entrusted with Master by Customs at previous port.

On vessel's departure a clearance is issued by Customs, after confirming payment of tonnage dues. Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

(b) Immigration. Immigration officials attend from Tokuyama. They board vessel on arrival to examine passports, discharge books and/or other equivalent travel documents, and provide 72-hour. landing passes for crew members and passengers. One copy each of Crew List and Passenger List are required by them. Providing ship's Agent with a Crew List beforehand will be a great help in expediting immigration business on vessel's arrival. When vessel stays in port more than 72 hours., the landing passes will be extended every 72 hours. on application. In event that crew members, without entry visas, are to be landed for repatriation or transfer, Immigration will not permit their landing unless passage, by either sea or air, ensuring the prompt departure from Japan (within 72 hours.) of these men has been booked, or unless vessels to which they are to be transferred, arrive in Japan within 5 days.

PILOTAGE:

Inland Sea Pilot (Sekisaki/Tokuyama): Not compulsory. Agent gives 24 hrs. notice to Pilot Association Moji, and advice if ETA changed. (Master to cable "Anjin Moji" in case ETA changed and believes that his advice, if relayed by Agent, will not reach in good time; for example, at night before date of arrival at Sekisaki). Location: 3 miles South of Sekisaki lighthouse (33° 13′ N., 131° 54′ E.). Pilot boards on vessel's arrival at pilot station day and night. No alternative area in event of bad weather. No VHF.

Harbour Pilot (Tokuyama Harbour or Tokuyama-wan): Not compulsory. Pilot boards in Tokuyama-wan at quarantine anchorage, or other anchorage to pilot to berth. Master who has not taken Pilot at Sekisaki should enter harbour without Pilot (no pilot station at entrance). Master to inquire position for anchoring from Agent prior arrival. Agent will advise Master in consideration of vessel's size, draft or nos. Of other vessels, especially supertankers in port.

ANCHORAGE: Quarantine anchorage, 34° 01′ N. 131° 46′ E., depth water 36 ft. Deeper water of more than 60 ft. about 2 miles S.W. of quarantine anchorage where quarantine board supertankers. If harbour congested, vessels, especially supertankers, anchor outer harbour. In this case quarantine go to outer harbour if advised by Master or Agent. In emergency or unable contact Agent, vessel can talk with Harbour Master by VHF, Channel 16, calling "Tokuyama Hoan". No restriction for entry into and/or departure from the anchorages after nightfall.

MAX. SIZE: Biggest recorded vessel to enter, 215,000 d.w.t., 64 ft. draft.

Tankers:

Berth	*Max. d.w.t.*	*Max. LOA (m)*	*Max. Safe Draft (m)*
Idemitsu Kosan Sea berth	No limit	No limit	19.50
Idemitsu Kosan Ohura No. 3 Jetty	50,000	250	12.00
Idemitsu Kosan Ohura No. 4 Jetty	50,000	250	12.00
Idemitsu Kosan	70,000	300	12.00
Idemitsu Kosan Centre Pier	35,000	220	11.00
Nippon Seiro Nishigamori Jetty	18,000	180	11.00

HEALTH: Radio Agent for free pratique not less than 12 hours. and not more than 36 hours. before arrival, advising full details of vessel and health conditions on board. When free pratique is granted by radio vessel will be required to submit the following documents to Quarantine Officer on arrival:

Maritime Declaration of Health.
Crew List.
Passenger List.

The following vessels will not be able to get radio pratique:

A vessel that has been in contact with an infected area or a suspected infected area within 15 days of arrival.

If a vessel has on board any case, or any suspected case of infectious disease, within 15 days of arrival.

If crew or passengers on board do not possess Valid Smallpox Vaccination Certificates.

If a vessel does not possess a valid Derat or Derat Exemption Certificate.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Join inside harbour. For supertankers outer harbour if requested. Tugs' lines used. 8 tugs available, up to 4000 h.p.

BERTHING: Also see "Tankers". No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

(a) Wharf	*Length (m.)*	*Depth (m.)*	*Capacity (g/t)*	*Cargo*
Tokuyama Soda Salt Pier	117	10.5	15,000×1	Salt
Tokuyama Soda Cement pier	162	10	2,500×1	Cement
Toyo Soda Fertiliser pier	160	9.5	10,000×1	Fertiliser
Toyo Soda Salt pier	110	10	15,000×1	Salt
Toyo Soda Salt pier	60	8	4,000×1	Salt
Toyo Soda Cement pier	125	10	10,000×1	Cement
Nisshin Seiko pier	66	5	1,000×1	Steel
Public Chikko wharf	200	6	3,500×1	General
Public Harumi wharf	140	7.5	7,000×1	General

(b) Buoy	*Depth (m.)*	*Capacity (g/t)*	*Cargo*
Sea Berth	20.0	100,000	Oil
Nippon Seiro berth	12	20,000	Oil

(Refer to Oil Terminals)

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. (50% additional of basic stevedorage), 2100–0500 hrs. next morning (130% additional), Sundays/holidays (60% additional).

Loading/Unloading facilities

(a) Gangs: Maximum 20 gangs are available.

Classification	*Regular Employees*	*Temporary labourers*
Stevedores	160	180
Longshoremen	80	60

Tokuyama Kairiku Unso Kabushiki Kaisha; Kamigumi & Co. Ltd.; Toyo Koun Co. Ltd.; Sankyu Transportation & Engineering Co., Ltd.

(b) Lighters: No lighter is available, but semi-motor schooners are arrangeable in case of need.

(c) Shore crane: None.

(d) Floating crane: No. 1. Capacity, 100 tons. Owners, Maruike Kaiun (from Kudamatsu).

(e) Average performance of loading/unloading: Loading: Cement in bags, 55–65 t.p.h./gang; Soda ash in bags, 40–50 t.p.h./gang; Fertilisers in bags, 55–65 t.p.h./gang. Discharging: Salt in bulk, 65–75 t.p.h./gang.

Working hours: 1 labour shift. Normal working hours: 0800 to 1700 hrs. Overtime is possible by applying to Customs. No work can be arranged for during New Year holidays (1st to 3rd January).

MEDICAL: No advance notice required unless urgent. Hospital: Asanoumi Hospital, Asami Hospital, Ono Dental Plant.

TANKERS: No slop facilities.

Berth	*Product*	*Shoreline*	*Discharge Rate (t.p.h.)*	*Hoses*
Idemitsu Kosan	Crude Oil	36"×1	10,000	16"×2, 14"×1
Sea berth		30"×1		Flexible, 8 ton derrick for each hose.
Idemitsu Kosan	Crude Oil	18"×1	5,000	12"×2
Ohura No. 3 Jetty				Chiksan joint.
Idemitsu Kosan	Crude Oil	18"×1	5,000	16"×2, 14"×1
Ohura No. 4 Jetty	Fuel Oil	14"×1	4,000	Flexible.
	Diesel Oil	14"×1	4,000	12"×2 Chiksan joint, 8 ton derrick for each flexible hose.
Idemitsu Kosan	Crude Oil	24"×2	5,000	Chiksan joint.
	Fuel Oil	30"×1	4,000	12"×2. Total
	Naphtha	24"×1	3,000	4 Chiksan.
Idemitsu Kosan	Crude Oil	18"×1	2,000	8"×2 Flexible.
Centre Pier	Fuel Oil	12"×2	1,500	
	Diesel Oil	10"×1	1,500	
	Kerosene	10"×1	800	
	Naphtha	14"×1	1,000	
Nippon Seiro	Raw Oil	12"×1	700	8"×1 Flexible.
Nishigamori Jetty	Fuel Oil	10"×1	500	

Idemitsu Sea berth: is located in Tokuyama Bay at the position of 33° 59.5′ N., 131° 46.1′ E., consisting of 7 mooring buoys. 130,000 d.w.t. tanker can be accommodated at this berth, being moored to buoys fore and aft. 4 powerful tug boats and 2 line boats are engaged in berthing/unberthing. The depth of water is 20 m.

Nippon Seiro Refinery: The mooring berth consists of 1 oil pier and 2 mooring buoys, to which vessel is moored fore and aft, keeping about 15 m. off the pier. The depth of water is 12 m.

Nippon Geon Wharf (25 ft.) (for LPG).

DENSITY: Salt. 1025.

FRESH WATER: Water barges available, 1 each of 450 tons, 350 tons and 160 tons. Hydrants at Idemitsu Central pier, Toyo Soda wharf. The rate of delivery: 50 t.p.h. from barge, 20 t.p.h. from hydrant.

FUEL: Major oil companies are represented and all grades of marine oil can be delivered usually by barge.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Minor repairs only.

DRY DOCKS: Kasado Dockyard in Kudamatsu-wan, entrance three miles E. of Tokuyama-wan entrance. Largest dry dock for 50,000 tonners and four other dry docks/building docks.

AIRPORT: Hiroshima (about 2.5 hours. by taxi/train), Ube (2 hours. by taxi/train) 2 flights a day.

TIME: GMT plus 9 hours. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police, tel. 110; Ambulance and Fire, tel. 119.

TELEPHONES: No facilities for placing on board.

SERVICES: From Moji, Kobe or Osaka.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Port and Harbour Bureau.

AGENT: Sub-agents of Dodwell & Co. Ltd., Tokyo. Holme Ringer & Co. Ltd., c/o Sankyu Transportation & Engineering Co. Ltd., Shunan Branch, 12-7 Chikko-cho, Tokuyama-shi, Yamaguchi-ken. Cable address: "Ringer Tokuyama" Domestic Telex: 6765-93 Sankyu J. Tel.: Tokuyama (0834) 22-0039.

TOKYO: 35.43 N. 139.45 E. (See Plan Book)

DOCUMENTS:

4 copies Inward/Outward Declaration – (Form C.2000 prepared by Agent).

1 copy Berth Application (normally prepared by Agent).

3 Cargo Manifest (Form C.2030 prepared by Agent).

1 List Ship's Stores (Form C.2040).

2 Parcel List.

5 Passenger Manifest (Form C.2070).

5 Crew Manifest (Form C.2060).

1 Statement by Master (Form C.2020).

1 Declaration for Payment Tonnage Dues (prepared by Agent).

1 Maritime Declaration of Health.

1 Application for Shore Passes (prepared by Agent).

2 Baggage Lists (Form 5370).

PILOTAGE: 12 hrs. advance notice of ETA required. Pilot boats named Musashi, Takao, Tsukuba and Awase. No light or sound signals, use ship's radio in case necessity arises. Address: Tokyo Pilot Association, 3-26-82 Kaigan, Minato-ku, Tokyo (at the Southern tip of the Shibaura Wharf). Tel. (453) 1691.

Pilot boards vessel outside harbour. Vessel awaits Pilot around "Quarantine Anchorage".

Vessels requiring a Pilot for the Uraga Channel should radio request to Anjin Yokosuka advising ship's details and arriving time at No. 1 Uraga Channel light buoy. Uraga Channel Pilot embarks three/five miles S.S.E. of Kannonsaki lighthouse, and will disembark on arrival at destination port limits. Applications for Uraga Channel Pilot should reach pilot office 24 hrs. before vessels arrival at No. 1 Uraga Channel light buoy.

Vessels of 10,000 gross tons or more should give "Notification of Traffic" to ensure safety of their navigation in or near Uraga Suido and Nakanose traffic routes (normally by Agent).

ADVANCE APPLICATIONS: Passenger ships and large vessels using mooring facilities must submit applications for use of facilities to port managers (the Port and Harbour Bureau of Tokyo Metropolitan Government) through shipping firms or Agents 3 days before entry into port so that they may have berths designated.

When they want to use anchorage facilities, they must submit applications for use of anchorage areas to Tokyo-Yokohama Port Director (the Port and Harbour Section of the Tokyo Maritime Safety Agency) to have anchorage sites designated. Small vessels of less than 300 gross tons do not need to submit anchorage application.

When ships of over 500 gross tons want to enter port at night (from sunset to sunrise), must submit applications in advance to Port Director and receive permission. Copy of written permission given to captain of ship when ship has entered port.

A ship carrying explosives or any other dangerous cargo must submit 2 copies of application in advance for permission to use port to Port Director. Such ships required to stay outside port in No. 3 Area. However, they will be allowed to enter port when Port Director considers it allowable.

RESTRICTIONS: No. 1 fairway is long and narrow (4,200 m. × 300 m.) and carries considerable traffic. Vessels under 500 tons not permitted use fairway when vessel over 5,000 tons is in transit. Depth in channel 12 m.

DEPARTURE PROCEDURE: Ship over 300 tons departing must hoist signal in daytime and 2 white lamps at night and make two prolonged blasts of whistles or siren 30 minutes before starts to move and then act according to signals given by signal station on Shibaura Quay. Departure notice must be submitted to Maritime Safety Agency and port managers (Operations Section of Port and Harbour Bureau). Foreign ships must submit required documents in addition to above notice to Tokyo Custom House, Immigration Control Office

ANCHORAGES: See "Advance Applications".

Quarantine anchorage on starboard hand of No. 1 fairway.

Sector A triangular sea area formed by line passing through point 180° and 400 m. from light buoy No. 16 and point 105° and 240 m. from same light buoy. Accommodates one 1,000 ton class ship or 2 ships of 500 ton class or smaller.

Sector B circular area with radius 120 m. from point 295° and 380 m. from tide signal post of No. 3 Daiba. Accommodates one 1,000 ton class ship.

Sector C (263,330 sq.m.) is a space between Harumi Wharf and Toyosu Wharf. Accommodates five 2,000 ton class vessels.

Sector D (141,350 sq.m.) sea area enclosed by line drawn from point 217° and 400 m. from Northwestern tip of Tsukishima Fishery Base through No. 8 mooring buoy. No. 15 buoy and Southern tip of Tsukishima Fishery Base. Accommodates 5 vessels smaller than 1,000 tons, but 2 if vessels larger than 700 tons.

MAX. SIZE: (Draft) General/Bulk: 9.30 m. for buoys; 9.30 m. for Shinagawa and Harumi; 8.50 m. for Toyosu; 10.00 m. for Gochi No. 13 and 15. Passenger vessels up to 20,000 gross tons or cargo vessels up to 20,000 d.w.t.

(Tide). Vessels of said size will not be affected by tide. Largest vessels to enter: 38,914 d.w.t.

Tankers: One berth, Tokyo Gas Wharf. Max. d.w.t. 25,000. Max. LOA, 205 m. Max. safe draft 9.70 m.

HEALTH: Radio Agent for free pratique not less than 12 hrs. and not more than 36 hrs. before arrival, advising full details of vessel and health condition on board. When free pratique is granted by radio vessel will be required to submit the following documents to Quarantine Officer on arrival:

Maritime Declaration of Health.

Crew List.

Passenger List.

The following vessels will not be able to get radio pratique:

A vessel that has been in contact with an infected area or a suspected infected area within 15 days of arrival.

If a vessel has on board any case, or suspected case, of infectious disease within 15 days of arrival.

If crew or passengers on board do not possess valid Smallpox Vaccination Certificate.

If a vessel does not possess a valid Derat or Derat Exemption Certificate.

Medical inspection of plants: When a report is received in advance from a ship by telegraph or other means of communication, Tokyo Office of the Yokohama Plant Disease Prevention Station must be notified by telephone or verbally in request for an on-the-spot inspection of plant in question.

Medical inspection of animals: When a report is received from a ship in advance by telegraph or other means of communication, the Tokyo Branch or the Haneda Branch of Animal Disease Prevention Station must be notified by telephone or verbally in request for an on-the-spot inspection of the animals.

RADIO: Vessels entering are watched at all times at Torigasaki, the entrance gate to Tokyo Bay, and record of passing the point is taken. As each ship passes point, this is immediately communicated by VHF radio telephone to head office of Tokyo Signal Communications Company. From here news communicated on normal telephone or on exclusive direct call telephone to interested parties (also see "VHF").

Recommended Captain communicates with Agents through Choshi Radio or Nagasaki Radio which covers all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

VHF:

A. Transmitting antenna:	Located 39° 26′ N. 139° 39′ E.
B. Type:	Single communication – Yagi type. Plural communication – corner reflector type.
C. Direction:	Southern part of entrance to Tokyo Bay and Port of Tokyo.
D. Frequency class:	F3.
E. Frequency:	Single communication – 156.6 mc/s., CH 12 156.7 mc/s., CH 14 156.8 mc/s., CH 16 (for calling, answering and safety) Plural communications – 161.6 mc/s., CH 20 161.7 mc/s., CH 22
F. Antenna power:	50 W.
G. Call sign:	Tokyo Port Radio.
H. Range:	Approx. 1,000 km (straight range) S.E. side – About 20 nautical miles South of Mojimazaki. S.W. side – About 5 nautical miles North of Oshima Island. North side – Tokyo Port and Chiba port.
I. Operating time:	All times.

Ship telephone: Uses VHF and is a service between navigating or anchored ships and subscriber telephones on land, and between ships connected via base station on land. Communicating sphere approximately 50 to 100 km. from base station. Base stations located so as to allow communication with any ship sailing along Japanese coasts.

Charges for device: Y1,000 for 1 telephone set and actual cost for use by ship.

Service charges: (in case Japan Telegraph and Telephone Public Corporation installed the unit) Y22,000 a month for long term, Y1,100 a day for short term.

Call charges: Within specified call area for ship telephone in general – Y90 up to 3 minutes and additional Y30 per minute after the 3 minutes.

TUGS: The port has 2 tug companies: (i) Toko Service Co. Ltd., 3-25-8, Kaigan, Minato-ku, Tokyo. Tel. (452) 4781. (ii) Shibaura Tsusen Co. Ltd., 3-1-3, Kaigan, Minato-ku, Tokyo. Tel. (455) 1461. Upon notification to either, tugs will be waiting in neighbourhood of scheduled berth. Ship's lines to be used.

BULK HANDLING FACILITIES: Containers handled at 2 berths at Shinagawa Wharf equipped with gantry cranes lifting capacity 30 tons and 37.5 tons.

There are also 8 container berths at Oi Wharf equipped with 16 gantry cranes of 30.5 tons capacity.

STEVEDORES: Advance advices should be made 24 hours at latest before vessel's arrival order arrange necessary gangs.

Discharge rates (approx.):

(a) Iron, steel and scrap, using crane or magnet, about 1,000 tons/day.

(b) Coal, crane and bucket, 1,500/2,000 tons/day.

(c) Ores, grabs and bulldozers, 1,000 tons/day.

(d) Timber, 1,000 tons/day.

(e) Grain, crane with bucket or suction, 1,000 tons/day.

MEDICAL: Hospitals, clinics and all specified facilities. Advance notice not necessary.

TANKERS: No slop discharge facilities (see "Services"). One tanker berth only. Products handled, Naphtha and Crude oil. Shorelines, one 12 in. for each product. Discharge rates 1,000 t.p.h. (Naphtha) 900-1,000 t.p.h. (Crude).

BERTHING: Any vessel entering port required to:

(1) Submit 1 each of "Declarations Inward/Outward of Vessels" to TMG and TMSA. See "Documents". (2) Submit "Application for Berth" to TMG. See "Documents" (3) Submit "Application for Designation of Anchoring Site" to TMSA (Form No. 13) regarding anchoring area. Berthing will be in order of arrival, passenger and special cargo vessels excepted.

Name of Wharf	*Length (m.)*	*Depth (m.)*	*No. of Berths*
Shinagawa	1,143	9.6	6
Shinagawa	476	6.8	3
Shibaura	910	8.0	6
Hinode	564	5.5	6
Takeshiba	103	6.7	1
Takeshiba	206	6.7	2
Harumi	Dolphin-3 (24 m.)	9.0	1
Harumi	132	9.0	1
Harumi	132	9.6	1
Harumi	797	9.0	5
Harumi	190	9.6	1
Harumi	456	9.4	2
Toyosu	140	7.0	1
Toyosu	210	7.0	1
Toyosu	200	8.5	1
Toyosu	Dolphin-7 (250 m.)	9.7	1
Oi Marine Products Wharf	450	12.0	2
Land Lot No.15	400	10.0	2
Keihin Port Development	500	12.0	2
Oi Wharf	1,800	12.0	6
Liner Wharf Reclaimed Land	1,800	10.0	9

There are many private wharves and other smaller public wharves in use and under construction.

FRESH WATER: Water supply from hydrant by Tokyo Metropolis, and waterboat by private management.

(a) Water supply on wharves		
Application	Bureau of Port and Harbour Offices in charge of each wharf.	
Work of water supply	Tokyo Port Service Association.	
(b) Water supply by water boat		
Extra charge	Overtime from 0600 to 0800	50%
	from 1700 to 2200	50%
	from 2200 to 0600	100%
	Special district	50%
	Festal day	50%

In the case of less than 20 tons per time, it will be considered 15 tons supply.

FUEL: All grades available. 24 hrs. notice required.

FIRE PRECAUTIONS: (Tankers).

1. Must enter port at dead slow speed preceded by patrol boat of TMSA, 1 tug boat each side of vessel and followed by fire patrol boat.

2. Engine to be kept ready for immediate use in case of emergency.

3. Tow lines to be placed over bow and stern with eyes close to water surface.

Note: No vessels allowed alongside a tanker during loading or discharging.

DEVELOPMENTS: 27 public wharves, 2 car ferry berths, 7 timber berths, 12 berths for dangerous cargo and 6 specialised berths to be constructed.

GANGWAY/DECK WATCHMEN: Necessary only in the case of valuable cargo.

OPENING/CLOSING HATCHES: Normally by crew.

CUSTOMS ALLOWANCES: (Tobacco) 200 cigarettes a week. (Wine and/or spirits) 760 cc's per crew member per week.

IDENTIFICATION CARDS: Not required.

CONSULS: Most countries have embassies and consuls in Tokyo.

REPAIRS: All grades of repairs available.

DRY DOCKS: Largest dry dock: length 180 m.; width 24 m.; depth 7.27 m. Capable of accommodating vessel of 16,750 gross tons. Also 1 other dry dock for ocean-going vessels.

REPATRIATION: All facilities. Many hotels.

(1) Tokyo Seamen's Club, 1-4-9 Kaigan, Minato-ku, Tokyo, Tel. (433) 5688.

(2) Tokyo Shibaura Seamen's home, 1-11-8, Shibaura, Minato-ku, Tokyo. Tel. (451) 3249.

(3) Kaiko-ryo, c/o Tokyo Central Wholesale Market, 5-2-1, Tsukiji, Chuo-ku, Tokyo. Tel. (541) 0934.

AIRPORT: Distance to new Tokyo International Airport (Narita Airport), approx. 75 km.

TIME: GMT plus 9 hours. Permanent.

HOLIDAYS: National Holidays: New Year's Holidays (Dec. 31st–Jan. 3rd); New Year's Day (Jan. 1st); Adult Day (Jan. 15th); Foundation Day (Feb. 11th); Vernal Equinox Day (around Mar. 21st); Emperor's Birthday (Apr. 29th); Constitution Commemoration Day (May 3rd); Children's Day (May 5th); Respect-for-Age Day (Sept. 15th); Autumnal Equinox Day (around Sept. 23rd); Tokyo Festival (Oct.

1st); Physical Education Day (Oct. 10th); Culture Day (Nov. 3rd); Labour Thanksgiving Day (Nov. 23rd).

No cargo work on 1st or 3rd Sundays of each month, and no work from 31st December to 3rd January inclusive. Cargo work can be arranged on all other days including National Holidays.

POLICE/AMBULANCE/FIRE: Tokyo Water Police, 1-11-12, Kaigan, Minato-ku, Tokyo. Tel. (433) 2411. Call Fire Stations for ambulances. Tokyo Water Fire Station, 5-1-23, Kachidoki, Chuo-ku, Tokyo. Tel. (531) 3121-3.

TELEPHONES: (also see "VHF").

Installed on ships moored at piers or jetties to allow telephone communications between ships and subscriber telephones on land and between ships.

SERVICES: Two tank cleaning companies available with barges of capacity 100 tons for disposal of residues. All other usual services available.

SHORE LEAVE: Crew members allowed ashore upon ship Master's request to Tokyo Immigration Office if have valid passports or seaman's pocket ledgers. In case a crew member has a criminal record or has been expelled from Japan, he will not be allowed ashore.

PORT REGULATIONS: Maintenance of order in Port of Tokyo is under the responsibility of TMSA in accordance Port Regulation Law. In case of an occurrence of disaster, TMSA and the Tokyo Water Fire Station will take charge of refuge, rescue and fire fighting.

DELAYS: Congestion in the port. Bad weather.

AUTHORITY: Bureau of Port and Harbour, Tokyo Metropolitan Government.

AGENTS: Dodwell Tramp Agencies, CPO Box 297, Togin Building, 4-2, 1-chome, Marunouchi, Chiyoda-ku, Tokyo. Tel. (03) 211-2141. Telegraphic: Dodtramp Tokyo. International Telex: J22274, J22602 and J24469.

TOMAKOMAI: 42.35 N. 141.35 E.

PILOTAGE: Not compulsory. Pilots board at the point of 500 m. off from breakwater.

RESTRICTIONS: Berthing and unberthing possible day and night.

MAX. SIZE: See "Berthing".

HEALTH Radio pratique available. Vessels usually anchor at Tomakomai, where the authorities board and grant free pratique.

TUGS: 1×4,000 h.p. 3×3,200 h.p. 1×3,000 h.p.
1×2,600 h.p. 1×1,220 h.p. 1×1,440 h.p.
1×1,100 h.p. 1× 380 h.p.

BERTHING:

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Capacity (G/T)*	*Remarks*
Commercial Port					
South Pier					
No. 1	185	10.0	9.5	15,000	Generals
No. 2	185	10.0	9.5	15,000	Containers & Generals 1×30 ton gantry crane
No. 3	195	11.0	10.5	30,000	Wood Chip & Generals
West Pier					
No. 1, 2, 3, 4	165	9.0	8.5	10,000	Generals
North Pier					
No. 1 & 2	130	7.5	7.0	5,000	Car, Containers & Generals
No. 3 & 4	90	5.5	5.0	2,000	Generals
East Pier					
No. 1, 2, 3	165	9.0	8.5	10,000	Coal only
No. 4	165	9.0	8.5	10,000	Cargo Ferry Boat & Generals
No. 5 & 6	135	9.0	8.5	10,000	Bulk & Generals
Industrial Port					
Kaihatsu Ferry Pier	476	8.5	8.0	8,000	Ferry Boat only
Nippon Light Metal					
Central Pier	200	14.0	12.5	30,000	Bauxite & Metal 2×18 ton Unloader
East Pier	120	10.0	9.5	15,000	Alumina & Metal
Central North Pier					
No. 1	180	10.0	9.5	15,000	Logs only
No. 2	130	7.5	7.0	5,000	Containers & Generals
No. 3	130	7.5	7.0	5,000	Bulk & Generals
No. 4	90	7.5	7.0	5,000	Bulk & Generals
Mokuzai Koku Dolphin					
No. 1 and 2		10.0	9.5	15,000	Logs only
Denka & Hinode Pier	300	10.0	9.5	20,000	Phosphate & Others
Soda Group					
Pier A	300	10.0	9.5	15,000	Salt & Others
Pier B	190	10.0	9.5	15,000	Sodium-Hydroxide, Ethylene & Others
Tomakomai Chemical Pier	330	10.0	9.5	15,000	Sulphuric Acid & Ore 1×3 ton Unloader
Central South Pier					
No. 1	240	12.0	11.3	20,000	Grain & General Pneumatic Unloader×2
No. 2	185	10.0	9.5	15,000	Bulk & Generals
Uufutsu Pier					
No. 1	240	12.0	11.5	30,000	Wood Chip & Generals
No. 2	185	10.0	9.5	15,000	Wood Pulp & Generals
No. 3	130	7.5	7.0	5,000	Bulk & Generals

TANKERS:

Oil Berths:

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Capacity (G/T)*
Idemitsu Oil Pier				
Dolphin		14.0	12.5	35,000
Dolphin		7.5	7.0	5,000
Maruzen/Showa Pier				
Dolphin	345	7.0	6.5	3,000
Nisseki/General Pier				
Dolphin	265	7.0	6.5	3,000
BS/Kyodo Pier				
Dolphin	225	7.0	6.5	3,000
Kyodo Oil Terminal Pier	260	7.5	7.0	5,000
Kyodo Karyoku Pier (Dolphin)		7.5	7.0	5,000
Sea Berth:				
Idemitsu Oil Sea-berth		23.0	22.0	250,000

FUEL: Domestic oil is available, bonded oil will be brought from Hakodate with sufficient advance notice, when required.

FRESH WATER: Available from shore or barge.

REPAIRS: Minor repairs possible.

AGENT: Sub-Agents of Dodwell & Co., Tokyo.

Narasaki Sangyo Co., Ltd. Tomakomai Marine Branch, 13-24, 2-chome Motonakano-machi, Tomakomai-shi, Hokkaido. Cable Address: Narasaki Tomakomai. Domestic Telex: 9842-10 Narasaki Tom. Tel: (0144) 35-2131.

TOYAMA: 36.46 N. 137.13 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
6 Crew Lists, including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory. No telegraphic address for Pilot station, but Pilot arranged through Agent whom keep advised ETA which may be sent through Niigata Radio. Pilot boards 1 mile off East breakwater from small tug. In event bad weather recommend remain outside port until weather clears. Pilot available daytime only.

ANCHORAGE: The harbour at the Jintsu river mouth is always calm. Covers about 125 acres, with depths of from 16.5 ft. to 33 ft. over mud and sand. Room at anchorage for at least 4 vessels over 5,000 gross tons. Anchoring position for ocean tankers is 36° 48′ N.; 137° 14′ E.

MAX. SIZE: See "Berthing" and "Tankers".

HEALTH: Radio pratique available. Formalities carried out at Quarantine anchorage.

RADIO: (Also see "Pilotage"): Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Usually join vessel at port entrance but can join outside harbour for large vessels. Used only when Pilot aboard.

"Narita Maru" – 2,060 h.p. uses own lines free of charge.
"Nihonkai Maru" – 1,800 h.p. uses own lines free of charge.
"Raicho Maru" – uses ship's lines.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth		*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Capacity (g.r.t.)*	*Shore Cranes (tons)*
Public:						
Wharf No.	1	185	10.0	9.0	10,000	1×5
	2	185	10.0	9.3	10,000	1×3
	3	185	6.5	6.5	3,000	
	4	160	8.5	8.0	8,000	
	5	180	5.5	5.0	2,500	
	6	90	6.0	5.5	2,000	
	7	130	7.5	7.4	5,000	
	8	130	7.5	7.4	5,000	
	9	50	4.5	4.5	500	
No. 1 Dolphin		21	5.0		1,000	
No. 2 ,,		17	6.0		1,500	
No. 3 ,,		12	5.0		1,000	
Private:						
Onoda Cement						
Silo		100	7.0			
Hokuden Dolphin		17	6.0		1,500	

MEDICAL: No advance notice required unless urgent.

TANKERS: Max. size: 200,000 d.w.t., Max. LOA, no limit, and Max. safe draft 19 m. for Sea Berth of Nihonkai Sekiyu K.K., Toyama. Two lines, diameters 16 in. Reducing pieces supplied as necessary. Discharge rate 7,500 t.p.h.
DENSITY: 1015–1019 min./max.
FRESH WATER: Available ex-wharf at Nos. 1, 2, 3, 4 and 5 wharves; average 40 t.p.h. Other berthing positions supplied by barge which ordered from Fushiki and is filled up at Toyama.
FUEL: Domestic oil is available; Bonded oil will be brought from Moji with sufficient advance notice when required.
FIRE PRECAUTIONS: Nihonkai Oil Co., Toyama, issue Safety Regulations to Master on arrival tanker sea-berth.
GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.
OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.
CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.
CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore but no spirits.
CONSULS: Nil.
REPAIRS: Minor repairs only.
DRY DOCKS: Nihonkai Juko Co. Ltd., Toyama. No. 1 dock, used for construction. No. 2 dock, ship-building capacity: length, 104 m.; width 15 m.; depth, 1.8 m. Size of dock: length, 112 m.; width, 14.6 m.; depth, 4 m. Max. building capacity, 4,000 g.r.t. No. 3 dock, ship-building capacity: length, 150 m.; width, 20.8 m.; depth, 5 m. Size of dock: length 168.2 m.; width, 21.88 m.; depth, 9.2 m. Max. building capacity, 10,750 g.r.t.
AIRPORT: Toyama airport, distance about 10 kms. Two daily flights.
TIME: GMT plus 9 hours. Permanent.
POLICE/AMBULANCE/FIRE: Police, Toyama North Police Station, Toyama (0764) 37–7171; Ambulance, Toyama Iwase Fire Station, Toyama (0764) 37–7141 or 119; Fire, Toyama Fire Station, Toyama (0764) 37–7141.
TELEPHONES: No facilities for placing on board.
SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.
AUTHORITY: Toyama-Kencho.

AGENTS: Sub-Agents of Dodwell & Co. Ltd., Tokyo. Fushiki Kairiku Unso Co., Ltd., Toyama Port Office, 82, Higashiiwase-Irifune-cho, Toyama-shi, Toyama-ken. Cable Address: Fushikikairiku Fushiki. Tel.: (0764) 38–1100.

TOYAMA SHINKO: 36.47 N. 137.10 E.

DOCUMENTS:

- Ship's Register.
- Last Port Clearance.
- 6 Crew Lists including Passport Nos.
- 3 Passenger Lists.
- 1 Store List.
- 1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agents will prepare Inward/Outward Declaration, 2 Cargo Manifests and 1 Cargo Manifest in transit using specific forms. Therefore ship's Agents should be provided with necessary information about details of cargoes in advance.
PILOTAGE: Pilot available any time during daylight. Not compulsory. No telegraphic address of Pilot station, therefore, direct advice to local Agent always required. Pilot meets vessels 209° 2 miles off leading light of Fushiki Port, thence takes vessel to Fushiki Quarantine Anchorage ground, due to many fishing-nets on both sides of fairway. No Quarantine Anchorage ground established presently at Toyama-Shinko, therefore, every vessel obtains free pratique at Fushiki. If requiring to come into Quarantine Anchorage without taking Pilot, necessary to advise Agent in advance. In case of bad weather and need to await outside port, recommend cruising in Toyama Bay until sea abates. Bay area too deep to anchor and also danger of fishing-nets. When approaching position for Pilot, give exact ETA to Agent by using Niigata Radio and/or VHF to Fushiki Harbour Master. Small wooden pilot-boat painted yellow. No particular light or sound signals required. Even if the vessel already obtained free pratique in other port, need to approach the aforesaid position for Pilot, because of no Pilot position located in Toyama-Shinko.
ANCHORAGE: No anchorage at Toyama-Shinko, therefore, if vessel required to await for berth or some other reason, use Fushiki Outer Anchorage ground where safe at all seasons with depth from 8 to 11 m. Sand and clay bottom. Room at anchorage for at least 6 vessels over 5,000 gross tons.
RESTRICTIONS: Pilot not available during darkness. No restrictions on tide, because small tide in all seasons. If draft over port limitation, vessel enters port after making adjustment by lightening in Outer Harbour in Fushiki.
MAX. SIZE: Length 200 m., draft 34 ft. Tidal range is max. 0.45 m.
HEALTH: Formalities will be carried out at Fushiki quarantine anchorage.
RADIO: (also see "Pilotage"). Recommend Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.
TUGS: Tugs normally join vessel at port entrance, but sometimes in Fushiki Outer Harbour for larger vessels. Maritia-Maru (2,060 h.p.) and Nihonkai-Maru (1,800 h.p.) provide lines, free of charge and Raicho-Maru (760 h.p.) uses ship's line. In case public tug, i.e. Nihonkai-Maru and Raicho-Maru used, always require Pilot on board.
BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Capacity (d.w.t.)*
Public				
No. 1 Wharf	280	12.0	11.0	80,000
	(14.0 m. in near future)			
No. 2 Wharf	185	10.0	9.5	15,000
No. 3 Wharf	185	10.0	9.5	15,000
No. 4 Wharf	185	10.0	9.5	15,000
No. 5 Wharf	130	7.5	6.5	5,000
No. 6 Wharf	130	7.5	6.3	5,000
Private (Log carrier only)				
Toyama Sangyo	373	10.0	9.0	15,000
Zoshima No. 1	200	10.0	9.0	15,000
Zoshima No. 2	155	7.5	7.0	5,000
Zoshima No. 3	210	8.0	7.5	8,000
Toyama Futo West	70	6.0	5.5	3,000
Toyama Futo East	170	8.0	7.5	8,000
Koike Mokuzai	171	10.0	9.0	15,000
Chuetsu Mokuzai	140	8.0	7.0	5,000

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. 50% additional of basic stevedorage; 2100–0500 hrs. next morning 130% additional; Sundays/holidays 60% additional.
MEDICAL: No advance notice required unless urgent.
DENSITY: Average density between 1015 and 1019 in all seasons.
FRESH WATER: Available, from wharves No. 1, 2, 3, 4, 5 and 6 average 10 t.p.h. In other berths, to be supplied by barge, average 50 t.p.h.
FUEL: Domestic oil is available; Bonded oil will be brought from Kanmon area, with 1 week advance notice, when required.
GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.
OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.
CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.
CUSTOMS ALLOWANCE: Only allowed 50 cigarettes to take ashore, but no spirits.
CONSULS: None.
REPAIRS: Minor repairs only.
DRY DOCKS: No dry docks. Nearest available in Toyama.
REPATRIATION: Possible.
AIRPORT: Toyama Airport about 25 km. distance. Two regular services a day. ANA only.
TIME: GMT plus 9 hours. No alterations made to clocks during year.
HOLIDAYS: 1st May and New Year's Day, most probably from 31st December to 3rd January.
POLICE/AMBULANCE/FIRE: Police, Shinminato Police Station, Shinminato (07668) 2–3141; Ambulance, Shinminato Fire Station, Shinminato (07668) 2–3175; Fire, Shinminato Fire Station, Shinminato (07668) 2–3175.
TELEPHONES: No facilities for placing telephones on board.
SERVICES: Hold cleaning available.
SHORE LEAVE: Local Immigration Officers issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer. Attending from Fushiki Immigration Office, Fushiki, due to no office in Toyama-Shinko.
AUTHORITY: Toyama-Kencho.

AGENTS: Sub-agents of Dodwell & Co. Ltd. Tokyo, Fushiki Kairiku Unso Co. Ltd., 6–6 Fushiki-Minato-machi, Takaoka-Shi, Toyama-ken. Head Office in Fushiki; Takaoka (0766) 44–1300/9 and Toyama-Shinko Branch; Shinminato (07668) 4–3330. Telegraphic address: Fushikikairiku Fushiki, only to Fushiki Head Office.

TSUKUMI: 33.05 N. 131.52 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists, including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory, but recommended unless Master well acquainted with locality. Pilot embarks vessel at anchorage, position 33° 05′ 30″ N. 131° 54′ 00″ E. Request for Pilot made through Agent; Master to report ETA 24 hours prior arrival.

ANCHORAGE: Good holding anchorage available; depth of water about 25 m. Loading and/or unloading of cargo usually effected alongside wharves and in event of loading/unloading at anchorage, when rough weather prevails, difficulty sometimes experienced on account of swell from open sea. Therefore suggested that vessel anchor as close to shore as possible consistent with safety.

RESTRICTIONS:

(a) Berthing: Night entry or berthing after nightfall, though not impractical (depending on weather) is not recommended unless special arrangements (stevedores, etc.) necessitate vessel's immediate berthing.

(b) Departure: Night departure allowed, weather permitting, and subject Pilot's agreement.

MAX. SIZE: See "Berthing".

HEALTH: Vessels usually anchor in the bay of Saganoseki or Saiki, where the authorities board and grant free pratique.

RADIO: Recommended Captain communicates with Agents through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: 2 tugs, each 1,800 h.p.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agents mainly by radio.

Berth	*Length (m)*	*Depth (m)*	*Permissible Draft (m)*	*Capacity (g/t)*
Todaka Pier No. 1	125	10.0	10.0	6,000
No. 2	125	9.0	9.0	6,000
Nittetsu Pier	160	10.5	10.5	23,000
Noshima Wharf	164	9.5	9.0	10,000
No. 2 Wharf	121	8.5	8.0	6,000
No. 1 Wharf	82	8.0	8.0	3,500
Noshima Pier	168	16.0	16.0	60,000

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. (50% additional of basic stevedorage), 2100–0500 hrs. next morning (130% additional), Sundays/holidays (60% additional).

MEDICAL: No advance notice required unless urgent.

DENSITY: Average density about 1024.

FRESH WATER: Available from shore; water barge will be brought from Saiki, when required.

FUEL: Bonded oil will be brought from Moji or Matsuyama, when required at anchorage.

FIRE PRECAUTIONS: By Marine Security Guards.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo aboard.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: Nil.

REPAIRS: Local workshop available only for minor repairs.

REPATRIATION: Possible.

AIRPORT: Oita Airport; one hour from Tsukumi by train. Regular airlines: ANA, JDA, TAW.

TIME: GMT plus 9 hours. No alterations to clocks during year.

HOLIDAYS: 14th–16th August.

POLICE/AMBULANCE/FIRE: Police, 110; Ambulance/Fire, 119.

TELEPHONES: No facilities for placing telephones on board.

SERVICES: No special services available, but if required will be arranged by Agent who calls from another port.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extensions possible if ship stays longer.

AUTHORITY: Usuki Doboku (Public Works) Office.

AGENT: Sub-agents of Dodwell & Co. Tokyo. Azuma Shipping Co. Ltd., Nakatsuru Bldg., 2nd Floor, 15–5, Semento-machi, Tsukumi-shi, Oita-ken. Cable Address: Ringer Tsukumi. Domestic Telex: 7755–77. Tel.: Tsukumi (09728) 2–2144.

TSURUGA: 35.40 N. 136.03 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists, including Passport Nos.
3 Passenger Lists.
1 Stores List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Daylight hours only. Pilot arranged through Agent. Await Pilot at quarantine anchorage (see "Anchorages").

ANCHORAGES: Quarantine anchorage is best area for anchoring to avoid heavy weather (being protected from the North by mountains). Position 35° 40′ 08″ N., 136° 02′ 55″ E.

HEALTH: Radio pratique available. Formalities carried out at Quarantine anchorage.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which covers all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Join ship inside breakwater and use tug's line.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*LOA (m.)*	*Capacity (g.r.t.)*	*Shore Cranes (tons)*
Tsuruga Cement Wharf (T.C.W.)	150.0	7.5	—	150.0	6,000	1×18.5
Kanegasaki W. (K.W.) (Public)	205.0	9.5	8.6	180.0	18,000	1× 6.4
Railway W. (R.W.) (JNR)	163.6	8.5	7.8	120.0	6,000	1×30.0 1× 5.0
Horai Wharf (H.W.) (Public)	390.0	7.3	6.8	180.0	2×4,000	—
Kawasaki-Matsue Wharf (K-M.W.)	370.0	10.0	9.2	250.0	20,000	1× 8.5

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. (50% additional of basic stevedorage), 2100–0500 hrs. next morning (130% additional), Sundays/holidays (60% additional).

MEDICAL: No advance notice required unless urgent.

TANKERS: No facilities for big tankers.

DENSITY: Average density through year 1023.

FRESH WATER: Available from wharf, and by barge.

FUEL: Bonded oil will be brought from Moji with sufficient advance notice, when required.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspectors ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear's maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Minor repairs only.

AIRPORT: Distance 1 hour by train. 2 flights daily to Tokyo.

TIME: GMT plus 9 hours. Permanent.

POLICE/AMBULANCE/FIRE: Police, 2–4000; Ambulance and Fire, 119.

TELEPHONES: Not available for placing on board.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

SERVICES: Hold cleaning.

AUTHORITY: Tsuruga Port Office.

AGENT: Sub-Agents of Dodwell & Co., Tokyo. Tsuruga Kairiku Unso Kaisha Ltd., P.O. Box 11, 10–2, Sakura-machi, Tsuruga-shi, Fukui-ken; Cable Address: Kairiku Tsuruga, Domestic Telex: 5176–693, Tel.: Tsuruga (07702) 2–3111.

UBE 33.56 N. 131.15 E. **(See Plan Book)**

DOCUMENTS

Ship's Register.
Last Port Clearance.
3 Crew Lists, including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agents should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Not compulsory but recommended unless Master well acquainted with area. No Harbour Pilot stationed at Ube but Inland Sea Pilot will attend.

Inland Sea pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hrs. notice. Urgent correction of ETA outside business hours should be cabled direct to Pilot station. Inland Sea Pilot Association covers all inland sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from one of three Pilot stations dependent upon vessel's last port of departure and at Master's discretion. Pilotage available throughout 24 hrs. and 72 hrs. advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as Harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits). Position 34° 38′ N. 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse. (Vessels transitting Bungo Channel). Position 33° 13′ N. 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimoneseki) Straits. Position 33° 56′ 24″ N. 131° 03′ 12″ E.

ANCHORAGE: Sea bottom is mud.

	Depth 4–7.5 m.	7.5–10 m.
Sheltered	73,000	233,100 sq. m.
Unsheltered	12,175,500	680,000

RESTRICTIONS:

(a) Outer harbour: No restriction.

(b) Inner harbour: Berthing/unberthing is practicable only during daytime.

(c) Deep draft vessels may berth at high water only.

MAX. SIZE: See "Berthing" and "Tankers".

HEALTH: At first port of call in Japan, vessel must obtain free pratique. Quarantine officers will attend vessel only from daylight to sunset and Captain to show all Vaccination Cards, Derating Exemption Certificate. In case vessel arrives from cholera infected area within 10 days, Captain must advise crew and passengers health condition to respective Quarantine Office through ship's Agents prior to arrival and close all soil pipes before entering port.

RADIO: Recommended Captain communicates with Agents through Choshi Radio or Nagaskai Radio which cover all ports in Japan. If specifically Westbound vessel to Choshi and Northbound to Nagasaki Radio respectively.

TUGS: "Naruto Maru" 2,800 h.p. stationed at Ube. Other tugs available from Moji or Tokuyama. Tug's lines used at no extra charge.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agents mainly by radio.

Wharf	*Length*	*Depth*
Public Okinoyama Wharf	370 m.	10 m.
Public Shibanaka Wharf	185 m.	10 m.
Ube Cement wharf	247 m.	9 m.
Ube Kosan Chisso wharf	188 m.	9 m.
Ube Kosan Urea wharf	223 m.	9 m.
Ube Kosan No. 2 pier	131 m.	9 m.
Central Glass wharf	162 m.	9 m.

Wharf for Limestone:

Name of wharf: Okinoyama Limestone Wharf (Ube Kosan No. 5 Wharf). Length of wharf 165 m. Maximum safe draft 11.00 m. Maximum d.w. tonnage 30,000 tons. Fairway 300 m. wide, 2.25 miles long, 8.80 m. deep, with shallow spot 8.40 m. at low water. Accessible max. draft 10.50 m. Facilities Loaders × 2; 1,500 tons per unit/hour. Entry and Departure Berthing/unberthing is practicable only during daytime. Deep draft vessel may unberth at high tide only.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agents advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agents, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. (50% additional of basic stevedorage), 2100–0500 hrs. next morning (130% additional), Sundays/holidays (60% additional).

MEDICAL: No advance notice required unless urgent.

TANKERS: Seibu Sekiyu Co. Refinery.

(a) Geographical Location: 33° 49′ 48″ N. 131° 13′ E. 163°, 11,400 m. from Motoyama Misaki.

(b) Entry Permission: Sea berth located outside harbour limit of Ube port and treated as a closed port. Vessels therefore required to obtain special permission for entry from Customs at any open port prior to arrival.

(c) Restrictions: Max. 230,000 d.w.t. Max. LOA, 325 m. Max. safe draft 19.5 m.

(d) Diameter/No. of shore pipes: Float-sink hose: 16 in.×2 lines connecting to manifold; sub-marine hose: 20 in.×2 lines; sub-marine pipe-line: 48 in.×1 line.

(e) Discharging Rate: 7,800 t.p.h. (Crude oil).

DENSITY: 1025.

FRESH WATER: *(a)* Water barges available from Moji and supply about 50 t.p.h. *(b)* Water from wharf supply at Central Glass Ube Cement and Ube Chisso wharves.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at max. seven days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: None.

REPAIRS: Sasebo Heavy Industries Co., Ltd., Moji; Kitakyushu Iron Works, Tobata; Ube Dockyard Co., Ltd.

DRY DOCKS: None.

AIRPORT: 30 mins. by road.

TIME: GMT plus 9 hrs. Permanent.

POLICE/AMBULANCE/FIRE: Police 110; Ambulance/Fire 119.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 day extension possible if ship stays longer.

SERVICES: All services available.

AUTHORITY: Yamaguchi-Kencho.

AGENTS: Sub-agents of Dodwell & Co. Ltd., Tokyo.

Dry Cargo: See "Moji".

Tankers: Uyeno Unyu Shokai, Yamaguchi Branch Office, Oaza Nishioki, Onoda-shi, Yamaguchi-ken; Cable address: Uyenoshell Ube, Domestic Telex: 6845–42, Tel. Ube (0836) 88–1171.

UNO 34.29 N. 133.57 E.

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists, including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Inland Sea pilotage should preverably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to pilot station. Inland Sea Pilot Association covers all inland sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from one of three pilot stations dependent upon vessels last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations. Also see "Shipmaster's Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transitting Kii Straits). Position 34° 38′ N.; 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse. (Vessels transitting Bungo Channel.) Position 33° 13′ N.; 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki Pilot station.

3. Hesaki, at East side of Kanmon (Shimonoseki) Straits. Position 33° 56′ 24″ N.; 131° 03′ 12″ E.

ANCHORAGE:

Harbour anchorage	*Bottom*	*Depth*	*Position from Tobisu Beacon*
No. 1 anchorage	Sand and/	18.0 m.	320°–800 m.
No. 2 ,,	or Sand/Shell	14.0 m.	300°–750 m.
No. 3 ,,		21.0 m.	40°–1,200 m.
No. 4 ,,		18.0 m.	150°–500 m.
No. 5 ,,		29.0 m.	23°–850 m.
No. 6 ,,		18.0 m.	25°–1,300 m.
Mitsui			
No. 1 anchorage		Same No. 1 anchorage	328°–700 m.
No. 2 ,,		,,	293°–600 m.
No. 3 ,,		,,	252°–600 m.

RESTRICTIONS: Pilots not available after sunset.

MAX. SIZE:

No. 1 Pier: 150 m. from South end, draft limit 8.5 m.; 120 m. from above to North end, draft limit 7.5 m.

No. 3 Pier: Depth of approaches, 15–20 m.; length of berth, 150 m.; depth alongside berth, 13 m.; max. draft acceptable, 10 m.; max. length acceptable, 150 m.; max. width acceptable, 20 m.

Mitsui Kindoku (HIBI), Private Pier: Depth of approaches, 16–20 m.; length of berth, 176 m., d.w.t. 30,000 tons; max. draft acceptable, 12 m.; max. length acceptable, 176 m.

HEALTH: Vessels usually anchor at Wada-Misaki (off Kobe), where the authorities board and grant free pratique.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

TUGS: Tugs join vessel at out-harbour area. Tug's lines used.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Permissible Length Overall (m.)*	*Capacity G/T*
No. 1 Pier	270	7.5–8.5	8.0	150	10,000
No. 3 pier	185	10	9.5	150	10,000

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. (50% additional of basic stevedorage), 2100–0500 hrs. next morning (130% additional), Sundays/holidays (60% additional).

MEDICAL: No advance notice required unless urgent.

TANKERS: None.

DENSITY: Winter 22.7; Summer 23.98.

FRESH WATER: Available at pier No. 1 (40 t.p.h.) ex-shore pipe. Available by water barge, 50 tons capacity from Okayama.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: No consuls available, but marine note of protest can be attested by local notary public at Okayama.

REPAIRS: All types of deck and engine repairs possible.

DRY DOCKS:

Dry dock	*Length*	*Width*	*Depth*	*d.w.t.*
No. 1	545 ft. 6 in.	76 ft. 1 in.	26 ft. 9 in.	20,500
No. 2	560 ft.	74 ft. 1 in.	26 ft. 9 in.	19,000
No. 3	670 ft.	103 ft. 3 in.	32 ft.	46,000

Tamano: Mitsui floating dock, max. size 150,000 d.w.t.

REPATRIATION: Possible.

AIRPORT: Okayama Airport 25 km. Only domestic airlines; 3 flights to Osaka, via Tokyo, daily.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Police (for emergency), 110; Ambulance, 119; Fire, 119.

TELEPHONES: No arrangements for placing telephones on board.

GENERAL: 3 days notice of special requirements essential.

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Tamano Port Administration Office.

AGENTS: Sub-Agents of Dodwell & Co. Ltd., Tokyo. Naigai Unyu Co. Ltd., Shokokaikan Bldg. 7350, Chikko Kaigan-dori Tamano-shi, Okayama-ken (706). Cable Address: Naigai Tamano. Domestic Telex: 5946–869. Tel.: (0863) 31-2211.

WAKAMATSU: 33.54 N. 130.48 E.

(See "Kanmon-Ko").

DOCUMENTS:

Ship's Register.
Last Port Clearance.
3 Crew Lists, including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: Compulsory. Harbour Pilots and Inland Sea Pilots are available at the pilot station or quarantine anchorage. Mutsure Pilots station: 33° 59′ 30″ N., 130° 53′ 00″ E. Inland Sea pilotage should preferably be arranged through Agent by cable via Nagasaki Radio giving 72 hours notice. Urgent correction of ETA outside business hours should be cabled direct to pilot station. Inland Sea Pilot Association covers all Inland Sea ports. Pilotage not compulsory but recommended in view of great number of islands causing navigational hazards. Pilots obtained from 1 of 3 Pilot stations dependent upon vessels last port of departure and at Master's discretion. Pilotage available throughout 24 hours and 72 hours advance notice preferred, thereafter advising any alterations. Most Inland Sea Pilots also act as harbour Pilots up to berth or anchorage at destination. *Note:* No VHF communication available with Inland Sea Pilot stations. Also see "Shipmaster's Report" before first port.

1. Wadamisaki, at entrance to Kobe (vessels transmitting Kii Straits). Position 34° 38′ N.; 135° 11′ E. Telegraphic address "Anjin Kobe".

2. Sekisaki, 3 miles South of Sekisaki lighthouse. (Vessels transitting Bungo Channel). Position 33° 13′ N.; 131° 54′ E. Telegraphic address "Anjin Saganoseki". In event bad weather, recommended vessels proceed for shelter as near as possible having due regard to safety, to Sekisaki pilot station.

3. Hesaki, at East side of Kanmon (Shimonoseki) Straits. Position 33° 56′ 24′ N.; 131° 03′ 12″ E.

ANCHORAGES: No. 5 section, Wakamatsu. Depth 9-11 m. Capacity (g/t), 15,000×2. Also quarantine anchorage.

RESTRICTIONS: Pilots not available after sunset. Entry and Sailing are controlled by the one-way signals as follows: *Entry:* 0800 to 1100 hrs.; 1300 to 1500 hrs. 1 hour before sunset to sunset. *Sailing:* 1100 to 1300 hrs.; 1500 hrs. to 1 hour before sunset. Sunset to 0800 hrs. Easterly winds prevail in warm season, dense fog prevails sometimes in Spring and Winter, but generally clears in a few hours in the morning. Tidal range about 1.5 m. and current in leading channel about 1.5–2.5 knots, but no current in port. Due to narrow channel leading to main harbour and shallow water at entrance of channel, length and draft of vessels are generally limited as follows:

Buoy: Ship's length overall, 165 m.; draft, 8.5 m.; 11,000 g.r.t

Fairway leading into main harbour about 200 m. wide and 2 miles long, running parallel to a breakwater and reclaimed land. In this channel, as in main harbour and fairway, vessels observe only one-way traffic and on an outgoing signal from the shore, wait outside for outgoing vessel until channel is cleared. Vessels with draft of more than 7 m. can enter/depart only at high tide. Entry permitted only from sunrise and vessel to be berthed before sunset. Night departure prohibited.

MAX. SIZE: See "Berthing".

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth and Wharves	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Permissible Length Overall (m.)*	*Capacity (g.r.t.)*	*Shore Cranes (tons)*
Buoy B	210	7.6	7.6	165	*No limit	—
Buoy C	220	8.5	8.4	160	*No limit	—
Buoy E	160	8.1	8.1	160	*No limit	—
Buoy H	150	6.4	6.4	110	2,500	—
Buoy I	150	7.0	7.0	110	3,000	—
Buoy J	150	6.5	6.5	110	3,000	—
Buoy K					1,000	—
Buoy L	220	8.6	8.5	165	*No limit	—
Buoy M	150	6.0	6.0	110	2,000	—
Buoy N	200	6.7	6.7		7,000	—
Buoy O	160	7.4	7.3	130	5,000	—
Buoy P					1,000	—
Makiyama	140	7.0	6.8	140	*No limit	1×3, 2×2.3
Asahi Glass	150	8.5	8.5	150	,,	1×3, 1×2
Tobata Shoko (TW)	150	8.5	8.5	150	,,	—
Mitsubishi						
(Coal) OKG	160	8.4	8.4	160	,,	2×4
Chemical Ind.						
OKJ	180	8.3	8.3	160	,,	1 ship loader
Kurosaki OD1	140	8.0	8.0	140	,,	—
Kokyo Wharf						
OD2	120	7.0	7.0	120	,,	—
Dolphin Wharf						
HD 1 (Logs)		8.4	8.4	160	,,	—
HD 2 (Logs)		8.4	8.4	160	,,	—
HD 3 (Logs)			9.0	160	,,	—

*Subject to draft.

HEALTH: Radio pratique available. Formalities will be carried out at the anchorage. Quarantine station 105° – 2,800 m. (800 m. square) from Mutsure Lighthouse.
RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specially Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.
TUGS: 2 tugs join vessel under Wakato bridge at corner of fairway leading to main harbour.
BRIDGES: Wakato bridge. Height of mast limited to 38 m. for passing under bridge.
STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. (50% additional of basic stevedorage), 2100–0500 hrs. next morning (130% additional), Sundays/holidays (60% additional).
MEDICAL: No advance notice required unless urgent.
TANKERS: No tanker berths.
DENSITY: Average density in port about 1019–1021 in Summer season; 1025/1026 in Winter season.
FRESH WATER: Available. Rate of delivery: 50–60 t.p.h. ex-barge. Minimum quantity at buoy, 10 tons; minimum quantity at No. 5 sec., 30 tons.
FUEL: Domestic oil is available; bonded oil will be brought from Moji, Ube or Ohita with sufficient advance notice, when required.
FIRE PRECAUTIONS: No tanker berth. Each tugboat is equipped with fire extinguisher system for attending emergency case at request.
DEVELOPMENTS: Land reclamation N.E. Wakamatsu for discharge wharves (coal/iron ore). Depth to be 12 m.
GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.
OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.
CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.
CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore but no spirits.
CONSULS: See "Yawata".
REPAIRS: All grades deck and engine repairs afloat.
DRY DOCKS: None.
AIRPORT: See "Yawata".
TIME: GMT plus 9 hours. Permanent.
POLICE/AMBULANCE/FIRE: Wakamatsu Water Police, tel. 093-76-2731; Wakamatsu Police Office, tel. 093-97-2731; Ambulance/Fire: Wakamatsu Fire department, tel. 093-76-4031; Defence/rescue department, tel. 093-76-4353.
SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.
AUTHORITY: Kitakyushuko Kanti-Kumiai.

AGENT: See "Tobata".

WAKAYAMA: 34.13 N. 135.08 E. (See Plan Book)

DOCUMENTS:
Ship's Register.
Last Port Clearance.
3 Crew Lists, including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.
PILOTAGE: Wakayama-Shimotsu licensed Pilots. ETA advices to Agent. Pilot boards 1,500–2,500 m. off Wakayama breakwater. Chart Nos. 1150 and 1143 (Japanese Maritime Safety Board). No pilot boat. Pilot boards from tug.
ANCHORAGE: For waiting Pilot and/or berth. (Nature of bottom, sand mixed with mud.) (Sumitomo Metal Ore Carrier): Four anchorage points for large vessels over 30,000 tons gross are provided by the Port Authority. Agents must apply for one when required. The position of each from the lighthouse (flashing white) in the Southern sector of the port is as follows:
"A" – 3,000 m. – 255°
"B" – 3,500 m. – 272°
"C" – 4,100 m. – 283°
"D" – 4,800 m. – 292°

Other vessels are required to anchor in position (approx.) 34° 13′ 30″ N., 135° 06′ 30″ E. or nearer the shore if possible. (Wakayama Log Carrier): 2,000 m. 245° and 230° from Red lighthouse; depth about 22 m.
RESTRICTIONS: Pilot available daytime only. Channel depth, (Southern Section) 9.0 m; (Northern Section) 14.0 m.
MAX. SIZE: (Wakayama Log Carrier): South Section, LOA 160 m., 20,000 d.w.t. draft 9.0 m.; LOA 200 m., 35,000 d.w.t., draft 10 m. (Sumitomo Metal Pier, South Section): LOA 250 m., 140,000 d.w.t., draft 14.0 m.
HEALTH: Radio Agent for free pratique not less than 12 hours and not more than 36 hours before arrival, advising full details of vessel and health condition on board. When free pratique is granted by radio vessel will be required to submit the following documents to Quarantine Officer on arrival:
Maritime Declaration of Health.
Crew List.
Passenger List.
Vaccination List.
The following vessels will not be able to get radio pratique:
A vessel that has been in contact with an infected area, or a suspected infected area within 15 days of arrival.
If a vessel has on board any case, or suspected cases, of infectious disease within 15 days of arrival.
If crew or passengers on board do not possess valid Smallpox Vaccination Certificate.
RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio or Kobe Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio or Kobe Radio respectively.
TUGS: Tug assistance normally commences from outer harbour. Tug lines used and charge included in towage. 8 tugs available, up to 3,000 h.p.
BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.
STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1630–2130 hrs. (60% additional of basic stevedorage), 2130–0400 hrs. next morning (130% additional), 0400–0830 (60% additional), Sundays/holidays (100% additional).
MEDICAL: No advance notice required unless urgent.
TANKERS: No tanker berth.
DENSITY: 1025–1030.
FRESH WATER: Available alongside and Water boat, capacity 90 tons.
FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at maximum 7 days prior notice.
GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo on board.
OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. Cost per hour per gang depending on type of cargoes. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.
CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.
CUSTOMS ALLOWANCES: Only allowed 200 cigarettes to take ashore for one week but no spirits.
CONSULS: None.
REPAIRS: Minor repairs only. Suwa Shipyard Co., Ltd Tel. 0734-31-1694.
DRY DOCK: None
REPATRIATION: Possible.
AIRPORT: Itami, Osaka, about 3 hours by car.
TIME: GMT plus 9. No alterations made to clocks during year.
POLICE/AMBULANCE/FIRE: Police, 110; Ambulance/Fire, 119.
SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 9 days, but 9 days extension possible if ship stays longer.
AUTHORITY: Wakayama-kencho.

AGENTS: *Wakayama North Port* (Sumitomo Steel Mills), Sumikin Kaiun Co. Ltd., c/o Sumitomo Kinzoku K.K., 1850, Minato, Wakayama City. Tel. Wakayama (0734) 55-5151. Telegraphic, "Shipsumikin Wakayama".
Wakayama South Port (Lumber/log discharge), Shimamato and Co., Ltd., 5-7, Chikko, Wakayama City. Tel. Wakayama (0734) 22-5111. Telegraphic, "Shimamoto Wakayama".

YAWATA: 33.52 N. 130.49 E.

(See "Kanmon-Ko").
DOCUMENTS:
Ship's Register.
Last Port Clearance.
3 Crew Lists, including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits,

camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: *Harbour pilotage:* Compulsory for entry and departure but not when passing through straits. Pilots embark Eastbound vessels at Mutsure quarantine anchorage (see "Moji"), Westbound vessels at Hesaki quarantine anchorage (see "Moji"). Two Pilots embark vessels exceeding 20,000 gross tons, charging 180% pilotage.

Sea pilotage: Vessel approaching from East obtain Pilot by radio request made at least 24 hours in advance. Pilot embarks 3 miles South from Sekisaki lighthouse; 33° 13′ N.; 131 54′ E.

Pilots should be kept closely advised of accurate ETA Pilot station. If any changes, Masters requested radio immediately to Pilot offices direct or through Agent reporting revised ETA. Cable addresses of Pilot offices: Harbour Pilot, "Kanmonpilot Moji". Inland Sea Pilot, "Anjin Moji". Require 24 hours notice of ETA, but can attend with 2–3 hours notice in emergency cases.

ANCHORAGES: No anchorage at Yawata, but quarantine anchorage used in essential cases. See "Quarantine".

RESTRICTIONS:

(*a*) Because of narrow channel leading to Yawata and shallow water at entrance of channel, length and draft of vessel limited, except for berthing at Nishi-Yawata wharf, where 20,000 gross tonnage with 200 m. length overall and 8.3 m. draft may be accommodated. Limits:

	Wharf	*Buoy*
Length (overall)	166 m.	155 m.
Draft	8.5 m.	8.5 m.
Gross tonnage	10,000 tons	10,000 tons

Vessel slightly exceeding above may be berthed at the Pilot's discretion, subject weather conditions and efficiency of engine, steering, etc.

(*b*) Fairway leading into main harbour about 200 m. wide and 2 miles long, running parallel to breakwater and reclaimed land. In this channel, as in main harbour and fairway to Yawata, vessels observe one-way traffic and, on a "not-clear" signal from shore, wait outside for outgoing vessels to clear channel. Vessels with draft of more than 7 m. can enter/depart only at high tide.

(*c*) Entry permitted only from sunrise and vessels to be berthed before sunset. Night departure prohibited.

(*d*) Wakato suspension bridge crosses channel between Tobata and Wakamatsu. Height of bridge from water line at fairway 42.675 m. at spring high tide; height of mast of vessels passing under bridge limited to 38 m.

(*e*) Easterly winds prevail in warm season. N.W. winds in Winter. Dense fog sometimes in Spring and Winter, but generally clear in morning. Tidal range about 1.2 m. Tidal current in channel about 1.5 to 2.5 knots, but no current in port.

(*f*) Port privately owned and controlled by Nippon Steel Corp.

MAX. SIZE: See "Berthing".

HEALTH: See "Moji".

(*a*) Quarantine station at Western entrance: 0.5 mile East of Mutsure lighthouse 33° 58′ 15″ N., 130° 53′ 43″ E.

(*b*) Quarantine station at Eastern entrance: 125°, 1,500 m. from Hesaki lighthouse 33° 56′ 24″ N., 131° 30′ 12″ E.

(*c*) Quarantine inspection not allowed inside port except when weather or other special reasons prevent quarantine boat from approaching ship at anchorage.

(*d*) Quarantine service is rendered from sunrise to one hour before sunset.

(*e*) "Q" flag should be hoisted until ship in free pratique.

(*f*) Vessels exceeding 20,000 gross tonnage may undergo quarantine on application when they berth inside port.

(*g*) When ship arrives from plague-infected or suspected area within 10 days after she left such place, 24 hours special quarantine required. All sanitary scuppers must be closed and garbage must not be thrown overboard after ship reaches 60 miles off Japanese coast.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

VHF: Vessel can keep in direct contact with port authorities in regard to arrival, berthing instruction, etc, through VHF, details as follows:

	Kitakyushu (Moji)	*Shimonoseki*
(*a*) Call sign:	"Kitakyushu port radio"	"Shimonoseki port radio"

(*b*) Location of radio facilities: The transmitting and receiving station located at top of Mt. Hinoyama, Shimonoseki, for the above both radio.

(*c*) Type of wave:

Channel:	Simplex 16 (Calling, responding)	16 (Calling, responding)
	Simplex 12 (Communication)	12 (Communication)
	Simplex 14 (Communication)	14 (Communication)
	Duplex 20 (Communication)	20 (Communication)
Outport:	50 W.	50 W.

(*d*) Operating hours: 0600–2000.

(*e*) Communicating range: Within a radius of 50 miles from the station.

(*f*) Communicating language: English and Japanese.

TUGS: 2 tugs join vessel at corner of fairway leading into main harbour. Ship's lines used when vessel berths.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Berth	*Length (m.)*	*Depth (m.)*	*Permissible Draft (m.)*	*Length Overall (m.)*	*Shore Cranes tons*
(Ore Wharf)					
Wharf No. 14	150	9.0	8.0	100	—
15	150	9.0	8.0	120	—
16	150	9.0	8.5	147	2×12
17	150	9.0	8.5	147	—
18	179	9.0	8.5	166	2×12
(Coal Wharf)					
Wharf No. 19	180	9.0	8.5	166	1× 5
20	180	9.0	8.5	166	1× 5
(Scrap or Pig Iron Wharf)					
Nishiyawata					
Wharf No. 2	120	9.0	8.5	100	2×40
No. O.B.2	220	9.0	8.5	200	—
Buoy No. 4	220	9.0	8.5	155	Nil.
5	—	9.0	8.5	145	Nil.
6	—	9.0	8.0	123	Nil.
10	—	9.0	8.5	156	Nil.
12	—	9.0	8.5	134	Nil.
14	—	9.0	8.0	100	Nil.

Note: Capacity for the above, no limit subject to draft and length.

BRIDGE: See "Restrictions".

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by the Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. (50% additional of basic stevedorage), 2100–0500 hrs. next morning (130% additional), Sundays/holidays (60% additional).

MEDICAL: No advance notice required unless urgent.

TANKERS: No tanker berth.

DENSITY: Average density in port about 1020–1022 in Summer season, 1024–1025 in Winter season.

FRESH WATER: At buoys: Water barges available from Wakamatsu, rate of delivery about 50 t.p.h. At wharves: (No. 16, 17, 18, 19, 20 and Nishi-Yawata wharf.) From hydrants: 25–40 t.p.h. For supply at Nishi-Yawata wharf, 1 day prior notice required. Overtime charge: (0500–0800 hrs.) (1700–2200 hrs.), 50% add.; (2200–0500 hrs.), 100% add.; bad weather 50% add.; Sundays and holidays, 50% add. Minimum quantity at Yawata, 10 tons. Minimum quantity at Mutsure anchorage, 50 tons.

FUEL: Domestic oil is available; Bonded oil will be brought from Moji, Ube or Ohita with sufficient advance notice, when required.

FIRE PRECAUTIONS: No tanker berth. Each tugboat is equipped with fire extinguisher system for attending emergency cases.

DEVELOPMENTS: All the present discharging berths (wharves) for coal, ore (including Nishi-Yawata scrap wharf) converted to loading berths.

GANGWAY/DECK WATCHMEN: Not specially required unless passengers or valuable cargo aboard.

OPENING/CLOSING HATCHES: Stevedores carry out opening and closing hatches. If any time lost by ship's crew doing this work, stevedores charge ship for waiting. Recommend request stevedores for this work unless crew can complete it before berthing.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gear maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS: British Consul, who is also acting Swedish Consul, is stationed with Holme Ringer, Moji (tel. 093-33-1311). American Consul stationed at Fukuoka (tel. 092-75-9331). Korean Consul stationed at Fukuoka (tel. 092-77-0461).

REPAIRS: All types of deck and engine repairs possible.

DRY DOCKS: No dry dock available.

REPATRIATION: Possible.

AIRPORT: Fukuoka Airport; approx. 70 kms.

(*a*) International line:

JAL, for Pusan (Tuesday and Thursday);
for Taipei-Hongkong (Monday and Thursday);
CPA, for Taipei-Hongkong (Wednesday and Saturday);
KAL, for Pusan-Seoul (Mon., Tues., Wed., Fri., and Sat.).

(*b*) Domestic line:

JAL and ANA, regular service.

Kitakyushu airport; approx. 20 kms. Flights often suspended by heavy rain and fog.

(*c*) Domestic line:

ANA, regular service.

TIME: GMT plus 9. No alterations made to clocks during year.

POLICE/AMBULANCE/FIRE: Yawata Police Station, tel. 093-67-6631; Wakamatsu Water Police, Yawata Port branch, tel. 093-67-0611; Ambulance/Fire, Yawata Fire Department, tel. 093-67-4831.

TELEPHONES: Nippon Senpaku Tsushin K.K. available at Moji (tel. 093-33-1089). In case of Mutsure anchorage, extra boat charge and personnel expenses will be incurred. Due to insufficient number of telephones require adequate advance notice for installation. Suitable ship's electrical voltage; DC–22/28 v. AC–100 v. 110 v. 120 v. (to keep at least within 10 v.).

GENERAL: Whenever vessel takes bunkers in port, advisable to close deck scuppers' holes before pumping in order to avoid overflow oil into sea.

SERVICES: Tank cleaning, sand blasting (Fuji Co., Tobata), chemical cleaning (Fuji Co., Tobata). Hold cleaning (Tsuyama Kosan K.K., Yawata; Fuji Co., Tobata). Compass adjusting (Kajiwara Koki, Shimonoseki). DF calibration (Nippon Radio Co., Tobata). Life-raft servicing and inspection (Kikutani Sengu, Shimonoseki; Marinair International, Kobe; International Marine, Kobe; Marine International; Yokohama and Tokyo); this service requires name of maker in advance. Radio and radar repairs available, but requires name of makers/type of the machine in advance. Laundry (Sunrise Cleaning, Tobata; Moji Dry Cleaning, Moji). Watchmen service available. Charts: only Japanese charts available locally; BA and HO charts can be obtained from Kobe and Yokohama respectively, with adequate notice. Grain fitting (Ushio Co., Moji; Fuji Sobi, Moji); this work is usually carried out at Moji (public port). Fumigation (Toyo Fumigation Co., Moji), this work is not permitted at Yawata but at Moji. Floating crane, capacity 200 tons (Kondo Kaiji, Wakamatsu; Nichibei Kosan). Diver (Nippon Salvage Co., Moji; Tsuyama Kosan, Wakamatsu). Salvage service (Nippon Salvage, Moji) Painting service (Fuji Co.).

SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days, but 3 days extension possible if ship stays longer.

AUTHORITY: Kitakyushuko Kauti-Kumiai.

AGENTS: See "Tobata".

8PT Bold CAPS.

YOKKAICHI: 34.57 N. 136.38 E. (See Plan Book)

DOCUMENTS: See "Yokohama".

PILOTAGE: Not compulsory; Pilot available at 34° 56′ 15″ N.; 136° 40′ 40″ E. Vessels requiring Pilot cable Agent at least a day ahead advising exact ETA Pilot station.

Wireless station for communicating with entering ships and for other port business, call signal JCZ. Radio wave in use is A1.A2 500 kc/s. and A1.A2 486 kc/s., output A1 50 W. and A2 110 W. Zone of communication about 100 km.

Yokkaichi signal station also equipped for assigning berths to entering ships and for other port business. VHF communication available, call signal Yokkaichi Port Radio, Channel 16. Working Channel 14, 0600 to 2000 hrs. any day.

ANCHORAGE: Vessels anchor 34° 56′ 15″ N., 136° 40′ 40″ E. where authorities board and grant free pratique; max. depth 13 m.

RESTRICTIONS: Entry restricted by vessel's draft and pratique. Max. draft inside port 12 m. Quarantine Authority attend vessel usually from dawn to sundown on any day. Berthing daytime only. Unberthing any time except tankers daytime only.

MAX. SIZE: Max. permissible draft inside port 12 m.

Tankers:

Berth	*Max. d.w.t.*	*Max. LOA (m.)*	*Max. Safe Draft (m.)*
Showa Outer SBM	275,000	No limit	19.30
Showa Inner SBM	170,000	No limit	16.00
Showa Wharf "E"	45,000	211	10.00
Daikyo SBM	230,000	No limit	9.50
Daiyo Umaokoshi Pier	60,000	245	9.80

HEALTH: Request for radio pratique to be addressed to Agents not less than 12 hrs. before arrival.

TIDE: Tidal current of Ese Bay runs Northward along East side of Mie Pref. and turns round at mouth of Kiso River and runs Southward for Chita peninsula.

Tidal level:		Tidal level (average)
	High tide	+7.74 ft.
	Mean tide	+4.30 ft.
	Low tide	+0.00 ft.

TUGS: Normally stand-by to assist vessel inside breakwater of entrance to fairway; tug's lines used.

BERTHING:

Berth No.	*Depth (m.)*	*Length (m.)*
1	8.0	161.0
2–3	8.5	245.0
4–5	9.0	215.0
6	3.0	179.0
8	10.0	190.0
9	10.0	200.0
10	5.5	200.0
11	10.0	200.0
12	5.0	140.0
13	11.0	245.0
14	10.0	220.0
15	10.0	220.0
16	7.5	114.0
17–18	5.5	163.0
19–21	5.0	210.0

SPECIALISED CARGO HANDLING FACILITIES: *Bulk Cargoes:* No. 2 wharf has a cereal silo which can store 56,840 tons of imported grain. Two pneumatic unloaders with unloading capacity of 300 t.p.h. per machine at the Northern berth of the pier to connect the silo with conveyors.

Containers: One deep-sea container berth of 280 m., quay length and minimum water depth of 12 m., incorporating a ro-ro ramp. Two 37.5 ton and 44.5 ton Hitachi container cranes. Container yard and marshalling yard area of 58,750 sq.m. Three TCM straddle carriers, 3 forklift trucks (10–25 tons), 15 tractors, 35 trailers. Container freight stations at Asake 5,940 sq.m. Wool centre 46,768 sq.m.

Liquid Chemicals/LPG Carriers: Private berth.

Facilities of Container Terminal:

1. Total area 58,750 m.
2. Container berth: Length 280 m., depth 12 m., mooring capacity 25,000d.w.t.×1 berth.
3. Cargo handling equipment: Ramp-way 1 unit, container cranes 2 sets, one 44.5 tons, one 37.5 tons.
4. Transport machine: Straddle carrier, 3 units, one 40 ft., two 20 ft.; fork lift 3, one 25 tons, one 20 tons, one 10 tons.
5. Container yard: Container yard 6 yards, 29,730 m. refrigerated container yard, one yard 1,275 m.
6. Other relevant facilities: Chassis yard 5,740 m.; wool centre 46,768 m.; cold store 4,664 m.; meat centre 3,335 m.

Tankers:

Berth	*Product*	*Shoreline*	*Discharge Rate (t.p.h.)*
Showa Outer SBM	Crude Oil	16 in.×2	4,500/6,500
Showa Inner SBM	Crude Oil	12 in.×2	4,500/5,000
Showa Wharf "E"	Naphtha	12 in.×1	500/900
	Fuel Oil	12 in.×1	500/900
	Kerosene (Load)	10 in.×1	300/500
	Lub. Oil (Load)	3 in.×1	200/300
Daikyo SBM	Crude Oil	16 in.×2	4,500/6,000
Daiyo Umaokoshi Pier	Crude Oil	12 in.×2 (Chiksan)	3,000/4,000
	Fuel Oil	12 in.×1 6 in.×1	700/900
	Kerosene (Load)	6 in.×2	380/400

DENSITY: Average 1025.

FRESH WATER: Available, rate of delivery 50 t.p.h. from shore pipes at Government wharves; 100 tons from barge; before 2200 hrs. additional cost 50%; after 2200 hrs. additional cost 100%.

FUEL: Most domestic and bonded oil available, ex-barge. Min. five days notice required.

CONSULS: None.

REPAIRS: Minor repairs only.

AIRPORT: No airport.

POLICE/AMBULANCE/FIRE: Police, tel. 110; Ambulance/Fire, tel. 119.

TELEPHONES: Telephone can be arranged from shore connection at Government wharves. No connections at tanker berths.

GENERAL: Lightening: Not allowed, except a cargo of oil or chemicals.

SERVICES: Technicians for vessel's instruments can be arranged from other ports.

REGULATIONS: Under adverse weather conditions:

1. If a typhoon is reported approaching, and upon advice from refinery representative, loading or unloading operation will be suspended and vessel will leave berth to a designated area for refuge.
2. During a violent thunderstorm, cargo work will be stopped upon receiving order from refinery, and vent-line valves securely closed.
3. During stormy weather, with gusty winds condition, Master shall follow weather reports closely and shall endeavour to prevent any accidents by taking all possible precautions, such as reinforcing mooring ropes and arranging adequate emergency personnel to stand-by for any emergency.

Liability for Accidents: If accident is judged by Maritime Safety Office and Port Captain to be ship's fault, either through negligence of these Safety Regulations or otherwise, Master shall immediately cease operations, if necessary, and simultaneously follow in good faith the instructions of refinery and Port Captain, and take all necessary actions. Master shall inspect and verify cause of accident in the presence of refinery representative and ship's Agent, and shall be held responsible for reporting the accident, in writing, to the parties concerned. Until this is completed and full agreement reached with refinery representatives, the vessel shall not leave the jetty, unless otherwise requested. For actual confirmation of the accident, and damage liability, Public Surveyor (Messrs. Japan Marine Inspections Co. Ltd.) is fully entitled to inspect the accident.

AUTHORITY: Yokkaichi Port Authority.

AGENTS: Sub-agents of Dodwell & Co. Ltd., Tokyo.

Dry Cargo Vessels: Yokkaichi Warehouse Co. Ltd., 6, Chitose-cho, Yokkaichi Mie-ken. Cable address: "Sodo Yokkaichi". Domestic Telex: 4948–179 Yonso J. Tel. Yokkaichi (0593) 53–5211.

Tankers: Uyeno Unyu Shokai Yokkaichi Office c/o Showa Yokkaichi Sekiyu K.K. 1, Shiohama-cho, Yokkaichi-shi Mie-ken. Cable address "Uyenoshell Yokkaichi". Domestic Telex 494–8276. Tel. Yokkaichi (0593) 45–2271/8.

YOKOHAMA (incl. Negishi and Tsurumi): 35.27 N. 139.38 E. (See Plan Book)

DOCUMENTS:
Ship's Register.
Last Port Clearance.
3 Crew Lists, including Passport Nos.
3 Passenger Lists.
1 Store List.
1 Declaration of Crew's Baggage, i.e. tobacco, wine/spirits, camera, wrist-watch, radio, firearms/swords, etc. (only at first port of call in Japan).

Ship's Agent will prepare Inward/Outward Declaration, 1 Cargo Manifest and Cargo Manifest in transit using specific forms. Therefore ship's Agent should be provided with necessary information about details of cargoes in advance.

PILOTAGE: As Yokohama/Kawasaki a busy port, all movements – entering, leaving port and shifting within port – regulated by Harbour Authorities, and Agent has to make application for movement one day before, also tugboat(s) arranged through Agent. If any change necessary to arrangement already made, two hrs. notice sufficient to make rearrangement with Pilot. If Pilot required at area off Ashika Shima Lt. Bn. in Tokyo Bay for passing Uraga Strait, 24 hrs. prior notice required for dispatching Pilot. (In rough sea Pilot cannot be obtained in that area.) No station pilot boat; Pilots use small launches and often make use of tugboat when it is employed at same time, for embarking and disembarking especially when sea rough. In either case, launch or tugboat with Pilot on board displays "H" flag or lights prescribed in International Regulations. Pilot for Yokohama/Kawasaki port picked-up off Yokohama fairway entrance buoys No. 1 and No. 2, but in case ship has to wait for berth, usually does not take Pilot and proceeds to anchorage shown on chart as "Quarantine Anchorage" or as near as safety permits, and anchors. In this case Pilot boards at anchorage. If anchor or picks-up Pilot inside harbour limit, pilotage cheaper because assessed on two stages; "From Bay to Sea" and "From Sea to Berth", but Master requested to anchor outside fairway. Vessel to provide properly approved Pilot ladder.

Uraga Channel:

Vessels requiring a Pilot for the Uraga Channel should radio request to Anjin Yokosuka, advising ship's details and arriving time at No. 1 Uraga Channel light buoy. Uraga Channel Pilot embarks 3 to 5 miles S.S.E. of Kannonsaki lighthouse, and will disembark on arrival at destination port limits. Applications for Uraga Channel Pilot should reach pilot office 24 hrs. before vessels arrival at No. 1 Uraga Channel light buoy.

Recommendations: To be followed by tankers of 100,000 d.w.t. or more when they navigate through the Uraga Channel with cargo loaded:

1. Twelve hrs. and three hrs., respectively, before such a vessel expects to pass the Uraga Channel No. 1 light buoy, it should report the following items to the Yokohama Maritime Safety Division. Also, after the three-hours-in-advance report, it should keep its radio station open. This, however, is not required if the vessel is South bound:
   - *(a)* Name of vessel.
   - *(b)* Signal letters, d.w.t. tonnage, type and quantity of cargo, name of port intended to enter (not required in a three-hours-in-advance report).
   - *(c)* Availability of international VHF transmitter-receiver equipment aboard.
   - *(d)* Time at which the vessel expects to pass the Uraga Channel No. 1 light buoy.
2. Refrain from sailing through the Channel when visibility is poor (less than about one nautical mile).
3. Avoid sailing through the Channel at night unless it is essential to do so.

   Follow any instruction that may be issued from the Director of the Yokohama Maritime Safety Division as to the time for sailing through the Channel.
4. Maintain look-out at stem.
5. Between the neighbourhood of the Uraga Channel No. 2 light buoy and that of the Uraga Channel No. 5 light buoy, avoid overtaking other vessels (weighing about 500 g.r.t. or more) unless it is essential to do so.

ANCHORAGES: 12–26 m. in quarantine anchorage, and 26–34 m. in other areas. For details refer to chart published by Hydrographic Division of Japan MSA.

RESTRICTIONS: Entry or departure or movement inside port not allowed from sunset to sunrise, but ships less than 15,000 g.r.t. without dangerous cargo can be given special permission to enter, leave port and move inside the port (only in Yokohama). In Kawasaki, which is very narrow and long, no special permission given. Depths of shallows in Yokohama, Tsurumi and Kawasaki fairways 11.6, 11.2 and 12.0 m., and Pilot Association make these the max. drafts accessible to the berths inside the respective fairways. Ship with max. draft of 11.6 m., when entering Yokohama through Yokohama fairway, has to wait for tide.

STEVEDORES: At least 24 hours prior notice excluding Sundays and holidays required in order for Agent to arrange stevedores. Vessel must constantly keep her Agent advised of ETA. If stevedores cannot commence loading/unloading at time notified by Agent, the orderers must pay for waiting time. If cargo gear not rigged on berthing, stevedores will do same for ship's crew. Overtime surcharges 1700–1900 hrs. (50% additional of basic stevedorage), 2100–0500 hrs. next morning (130% additional). Sundays/holidays (60% additional).

MAX. SIZE: *Tankers:*

Name of Berth	*Max. d.w.t.*	*Max. LOA*	*Max. safe draft*
Keihin Yokohama (Sea berth)	No limit	No limit	19.50 m.
Shell Oil (Main Jetty)	No limit	180 m.	10.00 m.
General Sekiyu	No limit	182 m.	9.30 m.
Mobil Oil	No limit	176 m.	9.45 m.
Asia Oil No. 5	No limit	No limit	12.00 m.
Nisseki Koyasu	No limit	250 m.	12.00 m.
Nisseki Negishi A (E.)	No limit	310 m.	17.00 m.
Nisseki Negishi B	No limit	250 m.	13.60 m.
Shell	No limit	260 m.	11.70 m.

HEALTH: Radio Agent for free pratique not less than 12 hrs. and not more than 36 hrs. before arrival, advising full details of vessel and health conditions on board. When free pratique is granted by radio, vessel will be required to submit the following documents to Quarantine Officer on arrival:
Maritime Declaration of Health.
Crew List.
Passenger List.

The following vessels will not be able to get radio pratique:

A vessel that has been in contact with an infected area or a suspected infected area within 15 days of arrival.

If a vessel has on board any case, or any suspected case of infectious disease, within 15 days of arrival.

If crew or passengers on board do not possess valid Smallpox Vaccination Certificates.

If a vessel does not possess a valid Derat or Derat Exemption Certificate.

RADIO: Recommended Captain communicates with Agent through Choshi Radio or Nagasaki Radio which cover all ports in Japan. If specifically Westbound vessel, to Choshi, and Northbound to Nagasaki Radio respectively.

VHF: Call sign Yokohama Port Radio. (See details under "Kawasaki/VHF").

MEDICAL: No advance notice required unless urgent.

TANKERS: Masters of tankers seldom requested to fit reducing pieces before arrival for connection of shore lines since oil installation have own appliances. Two slop disposal facilities, one in district No. 5 in Yokohama which is private enterprise and can dispose of dense residues, and one in District No. 1 in Kawasaki which is run by Kawasaki city and can dispose of diluted slop or oily ballast. (Also see "Max. Size").

Berth	*Product*	*Shoreline*	*Discharge Rate (t.p.h.)*
Keihin Yokohama Sea Berth	Crude	16 in.×3	10,000
Shell Oil	Gasoline	8 in.×2	850
Main Jetty	Chemical	8 in.×1	150
General Sekiyu	Fuel	8 in.×3	1,000
(Tsurumi Terminal)	Others	6 in.×1	200
Mobil Oil	Clean Oil	6 in.×2	1,000
(Tsurumi Terminal)	Dirty Oil	8 in.×1	1,200
Asia Oil No. 5	Crude	8 in.×2	2,000
	Fuel	8 in.×1	900
	Minas	8 in.×1	800
Nisseki Koyasu	Crude	12 in.×2	3,000
Nisseki Negishi A (E.)	Crude	12 in.×3	7,500
	Fuel	12 in.×1	3,500
Nisseki Negishi B	Fuel	12 in.×2	3,500
Shell Sekiyu	Fuel	12 in.×3	1,200
	Crude	12 in.×3	4,800

TUGS: Under control of Pilot, compulsory in Yokohama/Kawasaki for foreign ships, and normally join ships in fairway between outer breakwater and Lt. Hos. and Entrance Lt. Buoys. If ship is at anchor in quarantine area or near to it, tug(s) joins ship at anchor. Usually two tugs used for mooring and/or unmooring, but depends largely upon special conditions of berth and weather conditions. Tug's lines used and charge included in towage.

BERTHING: No specific requirements. Pilot boarding time will be notified by ship's Agent mainly by radio.

Mooring Buoys:

District	*Mooring Capacity*	*No. of Berths*	*Buoys*	*Depth (m.)*
1st District	1,000 G/T	1	A.C.	5.5–12.0
	1,500	2	H1.H2	
	2,000	1	H3	
	7,000	2	No.12.13	
	12,000	1	No.11	
	15,000	7	No.1.2.3.4.5.6.7.8.9.10	
2nd District	12,000	1	No.20.21	9.7–11.5
	15,000	2	No.22.23.24.25	
	30,000	1	D6	
3rd District	1,000	3	N1 N2 N3 N4	6.5–12.0
	15,000	4	No.30.31.32.33.36.37.38	
	20,000	1	No.43.44	
5th District	10,000	2	KM1 KM2 KM3	10.0

Private Piers: (Deeper than 4.5 m.)

District	*Piers and Wharves*	*Length (m)*	*Depth (m)*	*Mooring Capacity (T)*	*Number of Berths*	*Kind of Cargo*
TSURUMI-WARD	Asia Sekiyu Wharf No. 3	140	7.5	4,000	1	Oil Products
	No. 4	26.5	6	2,000	1	L.P.G.
	No. 5	95.7	12	43,000	1	Crude Petroleum
	No. 6	140	7.5	5,000	1	Oil Products
	Asahi Glass Co. Ltd. Pier	108	5	1,300	1	Glass, Silica
	Ajinomoto Co. Ltd. Pier	113	9	10,000	1	Grain
	Azuma Kaiun Pier	50	7	3,000	1	Steel Materials
	Ensuiko Berth	100	9.5	27,000	1	Sugar Cane
	Osaka Cement Co. Ltd. Pier	95	7	5,000	1	Cement
	Kobe Seikojo Co. Ltd. Yokohama Pier	58.5	4.5	1,200	1	Steel Materials
	Showa Sangyo Co. Yokohama Pier	163	9.3	21,000	1	Grain
	Showa Sekiyu Pier	70	7	5,000	1	Petroleum
	Shell Sekiyu Co. Sea Berth	280	12	80,000	1	Petroleum
	No. 1 Pier	175	10	30,000	1	Petroleum
	No. 2 Pier	80	5	1,000	1	Petroleum
	General Sekiyu Co. Tsurumi Pier	29.3	8.5	20,000	1	Petroleum
	Daito Yugyo Yokohama Pier	90	7	4,000	1	Petroleum
	Daikoku Warehouse Co. Pier	104	6	1,500	1	Steel Materials
	Tokyo Electric Power Co. Ltd.					
	Yokohama Power Plant Pier No. 1	30	7	5,000	1	Heavy Oil
	No. 2	30	7	5,000	1	Naphtha
	Tokyo Gas Co. Ltd. Tsurumi Wharf	228	5.5	1,000	1	Coal
	Tokyo Gas Co. Ltd. Tsurumi Wharf	180	6	2,000	2	Coal
	Suehiro Wharf	140	6.5	6,000	1	Coal
	Tokyo Shibaura Electric Co. Ltd. Pier No. 1	31	5	3,000	1	Electrical Machine
	No. 2	36	6	1,500	1	Electrical Machine
	Naigai Yuso Pier	41	5	1,000	1	Oil Products
	Nippon Futo Warehouse Co. Ltd. Pier	26	6	1,500	1	Oil
	Nitto Kagaku Ltd. Yokohama Pier No. 1	36	5	1,600	1	Crude Petroleum
	No. 2	38	5	2,000	1	L.P.G.
	No. 3	28	5	1,600	1	Sulphur
	No. 4	26	5	1,600	1	Chemical
	Nippon Kokan Co. Ltd. Keihin Iron Works Wharf	172	5.5	1,500	1	Gravel
	Nippon Kokan Co. Ltd. Keihin Iron Works Wharf	118	4.5	1,200	2	Steel Materials
	Ogishima Product Wharf A	250	7.5	3,000	2	Steel Materials
	B	266	11.5	20,000	1	Steel Materials
	C	267	12.5	30,000	1	Steel Materials
	Nippon Kokan Co. Ltd. Tsurumi Dock Yard					
	East Pier	295	7.5	190,000	1	For Ship Equipment
	West Pier (South)	260	6	120,000	1	For Ship Equipment
	(North)	140	4.5	3,000	1	For Ship Equipment
	Pier	50	7.5	15,000	1	For Ship Equipment
	Mitsubishi Kogyo Co. Cement Pier	122	7.5	4,000	1	Cement
	Mobil Sekiyu Co. Ltd. Pier	103	9.5	24,000	1	Petroleum
	Ogishima Sekiyu Kiechi Co. Sea Berth	Buoy	23	200,000	1	Crude Petroleum
KANAGAWA-WARD	Sangyo Shinko Co. Pier	55	6	1,700	1	Steel Materials
	Showa Denko Co. Ltd. Yokohama Work Pier	279	10	21,000	1	Ore
	Dolphin	72	9	5,600	1	Ore
	Nippon Seifun Co. Ltd. Pier	163	9	15,000	1	Grain
	Nisshin Transportation & Warehousing Co. Pier	256	9	19,000	1	Grain
	Nippon Kokan Co. Ltd. Asano Dock Yard A	105	5.5	4,200	1	For Ship Equipment
	B	93	9	8,300	1	For Ship Equipment
	D	90	8	8,300	1	For Ship Equipment
	E	252	8	113,000	1	For Ship Equipment
	H	170	8	20,000	1	For Ship Equipment
	Nippon Petroleum Refining Co. Ltd.					
	Yokohama Refinery Pier A	250	12	80,000	1	Crude Petroleum
	B	75	7	2,400	1	Oil Products
	C	165	8	21,000	1	Oil Products
	E	75	6	1,800	1	Oil Products
	F	75	7	1,500	1	Oil Products
	D	90	6	2,000	1	Oil Products
	Yokohama Warehouse Co. Ltd.					
	Suzushige Wharf No. 1	300	12	30,000	1	General Cargoes
	No. 2	99	10	15,000	2	General Cargoes
	No. 3	304	8	7,000	3	General Cargoes
	National Government Silo Pier	130	9	20,000	1	Grain
	Nippon Telephone Telegraph Pier	130	7.5	3,000	1	For Marine Cable Ship
NISHI-WARD	Asahi Kigyo Co. Pier	47.5	5	4,500	1	Cement
	Mitsubishi Heavy Industries, Ltd.					
	Yokohama Ship Yard Pier No. 1, 2	247	6	100,000	1	For Ship Equipment
	No. 5	115	7.5	6,000	1	For Ship Equipment
	No. 6	223	7	165,000	1	For Ship Equipment
	No. 7	165	6	90,000	1	For Ship Equipment
NAKA-WARD	Kokusai Futo Co. A, B Berth	348	17.6	180,000	1	
	C	190	8.5	3,000	1	Salt, Silica, Grain
	F, G	185	6.5	500	3	
	H Pier	54	6.5	2,000	1	Ore
	Kokusai Cable Ship Pier	35	7	2,000	1	For Marine Cable Ship
	Sumitomo Kinzoku Kogyo Co. Pier	185	7	6,000	2	Steel Materials
	Nippon Express Co. Honmoko Pier	208	11	20,000	1	Steel Materials
	Nissan Honmoku Wharf No. 1–2	360	10	18,000	2	Car
	No. 3	110	4.5	3,000	1	Car
	Mitsui & Co. Ltd. Honmoku Wharf	208	11	35,000	1	Car, Timber
	Mitsubishi Heavy Industries, Ltd.					
	Honmoku Works No. 1	334	9	120,000	1	For Ship Equipment
	No. 3	416	9	200,000	1	For Ship Equipment
	No. 4	463	7	200,000	1	For Ship Equipment
	Yokohama Maritime Safety Agency Pier	85	10	2,000	1	For Patrol Vessel

Private Piers: (Deeper than 4.5 m.)

District	*Piers and Wharves*	*Length (m)*	*Depth (m)*	*Mooring Capacity (T)*	*Number of Berths*	*Kind of Cargo*
ISOGO-WARD	Ishikawajima-Harima Heavy Industries Co. Ltd.					
	Yokohama 2nd Works No. 1 Jetty (South)	223	7	200,000	1	For Ship Equipment
	(North)	181	6	30,000	1	For Ship Equipment
	No. 3 Jetty (South)	250	8	200,000	1	For Ship Equipment
	(North)	256	9	300,000	1	For Ship Equipment
	No. 4 Jetty (South)	205	17	100,000	1	For Ship Equipment
	(North)	255	8	100,000	1	For Ship Equipment
	Ube Kosan Co. Pier	180	8.5	15,000	1	Cement
	Kanto Ryoko Concrete Kogyo Co. Pier	12.5	5	1,000	1	Cement
	Kokan Kenzai Co. Pier	65	6	2,000	1	Steel Materials
	Electric Power Development Co. Isogo Wharf	140	7.5	6,000	1	Coal
	Tokyo Gas Co. Ltd. Negishi Wharf	100	12	50,000	1	L.N.G. Heavy Oil
	Nippon Petroleum Refining Co. Ltd.					
	Negishi Refinery Pier A	420	17	150,000	2	Crude Petroleum
	B	104	13	50,000	1	Oil Products
	C2–4	99×3	7	3,000	6	Oil Products
	D1–4	90×4	4.5	500	8	Oil Products
	H1–3	103.5×3	7	3,500	6	Oil Products
	H4	125	8	5,000	2	Oil Products
	H5	140	9	5,000	2	Oil Products
	Lubricating Oil Pier	90	4.5	700	2	Lubricating Oil
	L.P.G. Pier	20	5	500	1	L.P.G.
	Sulphur Pier	30	6	1,000	1	Sulphur
	Asphalt Pier	23	6	1,500	1	Asphalt
	Nisshin Oil Mills Ltd. Isogo Pier	260	12	60,000	1	Grain
	Domestic Pier	50	12	1,700	1	Heavy Oil
	River Steel Co. Ltd. Pier	19	5	1,000	1	Steel Materials
	Suisan Kosha Pier	45	6	800	1	Fishery Products
KANAZAWA-WARD	Asahi Kigyo Co. Suzuegumi Warehouse Co. Pier	188	11	20,000	1	Alcohol, Cement
	Asahi Kigyo Co. Suzuegumi Warehouse Co. Pier	45	7	700	1	Alcohol, Cement
	Keihin Wharf Co. Ltd. Yokohama A	259	12.5	50,000	1	Car
	B	146	9.5	12,000	1	Car
	Daikoku Soko Co. Pier	80	7	2,000	1	Steel Materials
	Toyota Car Pier	110	6.5	3,000	1	Car
	Maruzen Sekiyu Co. Pier	23	7.2	1,000	1	Oil Products
	Maruzen Sekiyu Co. Pier	40	7.2	5,000	1	Oil Products
	River Steel Co. Ltd. Pier	75	6	1,000	1	Steel Materials
	River Steel Co. Ltd. Pier	145	6	3,000	1	Steel Materials

Public Piers

Piers	*Length (m.)*	*Depth (m.)*	*Mooring capacity (g/t)*	*Number of berths*	*Remarks*
Yamashita Pier	1,860	10.0	20,000 15,000	1 9	
Osambashi Pier	966	10.0–12.0	10,000	6	Alternative mooring 45,000 ton class one berth 25,000 ton class two berths 10,000 ton class one berth
Shinko Pier	1,783	7.2–10.2	20,000 15,000 10,000 4,000 3,000	1 1 6 2 1	Berth No. 7 is used by U.S. Army
Takashima Pier	888	7.3–10.0	15,000 6,000 3,000	2 2 2	
Yamanouchi Pier	402	8.0	6,000	3	
Detamachi Pier	520	7.5	5,000	4	
Mizuho Pier	1,259	9.0–10.0	15,000 8,000	5 2	This pier is used by U.S. Army
Honmoku Pier	5,435	5.5–12.0	2,000 15,000	1 26	Includes 3 Container Berths
Kanazawa Timber Pier	185	10.0	15,000	1	For Timber Ships
Honmoku Container Terminal	1,123	12.5	25,000 35,000	2 2	Container Berths (Keihin (Tokyo Bay) Port Development Authority)
Daikoku Pier	800	10.0	15,000	4	General Liner Berths (Keihin (Tokyo Bay) Port Development Authority)

DENSITY: Average approx. 1023.

FRESH WATER: Available at Honmoku Pier, Yamashita Pier, Osambashi Pier, Shinko Pier, Takashima Pier, Yamanouchi Pier, Mizuho Pier, Detamachi Pier and 4 Automatic Vending Machines. Water barge with 280 tons capacity also available.

FUEL: All grades of bonded bunkers are stocked in Tokyo Bay, Ise Bay, Osaka Bay and Kanmon Port. At all other ports bunkers will be lightered from the nearest bunker stock ports at max. 7 days prior notice.

FIRE PRECAUTIONS: Oil installations in Yokohama/Kawasaki generally do not allow bunker barge to come alongside ships moored to their berths.

CERTIFICATES: Ship's Register to show Customs Inspector ship's registered gross and nett tonnages. Valid Cargo Gear Certificates sometimes required by stevedores when cargo gears maintenance appears to be poor.

CUSTOMS ALLOWANCES: Only allowed 50 cigarettes to take ashore but no spirits.

CONSULS:

American Consulate-General	tel. 681–0841/2
Her Britannic Majesty's Consulate	,, 201–1540/2
Consulate of France	,, 201–1840
Consulate-General of Argentine Republic	,, 7410–4194
Consulate-General of the Republic of China	,, 641–3641/5
Consulate of Brazil	,, 641–0097
Consulate-General of the Republic of Panama	,, 641–8549
Consulate-General of Peru	,, 641–0022
Consulate of the Republic of Korea	,, 201–4531
Honorary Consulate of Paraguay	,, 401–6343
Honorary Consulate of the Netherlands	,, 651–1661/9
Honorary-Consulate-General of El Salvador	,, 211–1371
Royal Swedish Honorary Consulate	,, 201–4171
Royal Thai Honorary Consulate	,, 641–1361
Royal Norwegian Honorary Consulate	,, 641–7361
	,, 691–6583
Royal Greek Honorary Consulate-General	,, 681–1713

REPAIRS: Any kind of repairs can be effected at this port.
DRY DOCKS: The largest dry dock, owned by Ishikawajima-Harima Heavy Industries Ltd. (and another six smaller dry docks owned by Mitsubishi Heavy Industries Ltd., Nippon Kokan K.K.). Max. length, 1,161 ft. 5 in.; breadth at entrance, 183 ft. 8 in.; height of sill above bottom dock,, 5 ft. 3 in.; depth on sill at high water, ordinary spring tides, 20 ft. 3 in.
REPATRIATION: Possible.
AIRPORT: Haneda International Airport 25 km. and served by many regular airlines.
TIME: GMT plus 9 hrs. No alterations made to clocks during year.
HOLIDAYS: Only observed at Public terminals.
POLICE/AMBULANCE/FIRE: Police, 110; Ambulance, 119; Fire, 119.
TELEPHONES: Telephones can be placed on board.
SERVICES: Almost all requirements by ships could be met, if time permits.
SHORE LEAVE: Local Immigration Offices issue shore pass valid for only 3 days; but 3 days extension possible if ship stays longer.
DEVELOPMENTS:
Daikoku Pier Construction Project:
The following construction works are now under way just off Daikoku-cho of Tsurumi Ward:
1. A 2-berth pier of 600 metres long, with the depth of water of 12 metres, to accommodate container vessels of 35,000 ton class.
2. A 11-berth pier of 2,200 metres long, with the depth of water of 10 metres, for liners of 15,000 ton class.
3. A 2-berth pier of 480 metres long with the depth of water of 12 metres for tramps of 30,000 ton class.
4. A 4-berth pier of 520 metres long with the depth of water of 7.5 metres for coastwise vessels of 5,000 ton class.
5. An island-like pier with loading and unloading places.

As for the 11-berth pier for liners as mentioned above, four berths are already in use. This will be followed soon by the commissioning of two berths out of the four for coastwise vessels.

It may be noted that a project to make on this pier a green zone that will provide a recreation place and an athletic field for the benefit of port workers and citizens is now being undertaken. The athletic field is already open for public use.

Honmoku Pier (For Construction Materials) Construction Projects:
With a view to ensuring stabilized supplies of construction materials in good quantities by sea from distant places, a pier with one berth of 185 metres long with the depth of water of 10 metres for vessels of 15,000 ton class is now under construction adjacent to D jetty of the Honmoku Pier.

Land Reclamation Project (near the Honmoku Pier):
For the purpose of securing land for piers and creating a green zone and, at the same time, acquiring the ground where to dispose of the city refuse, this project aims at reclaiming land in front of D jetty of the Honmoku Pier by burying dredged soil and sand, unwanted mud and soil and general wastes that do not pollute the environment. It will reclaim land for further improvement of piers and make a park and a green zone for the benefit of citizens. A jetty for fishing will also be provided.

Kanazawa Reclamation Project:
A reclamation work will be carried out in the sea in front of Kanazawa Ward, in accordance with the city redevelopment plants. A modern industrial zone will be formed on this reclaimed land and many factories that are now scattered in the city, whose locations are undesirable from an environmental view point, will be urged to be relocated to this zone. Thus, while improving the conditions in the city area and various city facilities, the project aims at realizing an ideal industrial complex where new and relocated factories will be given sufficient guidance and assistance to have highly modernized facilities that will be free from any pollution problem.

Land for housing for employees of the relocated factories will be secured, as also the land for public facilities to ensure the smooth functioning of the city. In addition, a marine park will be made, where the people can enjoy the beauty of nature and take quiet repose.
AUTHORITY: Port and Harbour Bureau.
AGENTS: Dodwell Tramp Agencies, PO Box 271, Yokohama Port, 5th Floor, Minato Building, 33, 3-chome, Hon-ho, Naka-ku, Yokohama. Tel. (045) 201-6991. Telegraphic, Dodtramp Yokohama. International Telex. J47721.

YOKOSUKA: 35.17 N. 139.40 E.

DOCUMENTS:
Customs:
Port Call Notification.
Cargo List.
List of Crews dutiable possessions.
Passenger List.
Crew List.
Ship's Nationality Certificate.
Port Departure permission paper.
Immigration:
Crew List.
Port Call Notification.
Passport or Crew Pocket Book.
Quarantine:
Declaration of Health.
Crew List.
Passenger List.
Plant Protection Station:
Plant Importation Inspection Application.
Maritime Safety Agency:
Port Call Notification.
Application for Loading, Transfer and Unloading of Explosives and Combustibles.
Application for Transport of Explosives and Combustibles.
Port Authority:
Port Call Notification.
Application for use of Facility.
PILOTAGE: In applying for Pilot at time of entry and departure, Pilot station should be contacted 24 hours in advance of beginning of Pilotage through Agent. 44 Pilots available. Pilot boat has telephone.
ANCHORAGES: At 4th District of Yokosuka Port. Depths 10–30 m.
RESTRICTIONS: The 1st, 2nd and 3rd District of Yokosuka Port under compulsory pilotage districts.
Possibilities of Entry or Sailing after Sunset:
Nagura Pier:
Entry – 0600 to 1800 hrs.; Sailing – 0600 to 2200 hrs.
Yokosuka Shin-ko:
Entry – 0600 to 1700 hrs.; Sailing – 0600 to 1700 hrs.
MAX. SIZE: See "Berthing".
HEALTH: Radio pratique available. Authorities board at anchorage. Quarantine station to be informed in advance name of last port, ship's name, tonnage, number of crew, number of passengers, ship's nationality, etc. In event any suspected disease, Agent should be advised. When isolation of ship needed, it will be transferred to Nagahama Quarantine Station in Yokohama.
RADIO: Local radio station.
TUGS: Can be arranged through Agent. Tugs normally join vessel in 3rd District when vessel enters Nagaura and New Port, and in 7th District when it enters Kurihama. Tug's lines to be used. Charge for tug's lines included in charge for tug.
BERTHING: Agent submits application for berth to Port Authority (Nagaura and Kurihama port offices and Yokosuka New Port Wharf Company).

Berth	Length (m)	Depth (m)	Permissible Draft (m)	LOA (m)	Capacity (d.w.t.)
Nagaura Pier 1	150	9.0	9.0	150	18,000
2	200	10.0	9.6	180	18,000
3	60	6.0	5.0	50	1,500
Buoy No. 1 A×B		9.5	9.0	140	10,000
No. 3 A×B		10.5	9.5	160	12,000
No. 4 A×B		13.0	11.7	200	40,000
No. 5 A×B		13.0	11.7	200	40,000
No. 6 A×B		11.5	10.5	185	20,000
Yokosuka Shinko					(g.r.t.)
Pier 1	130	7.5	7.5	120	5,000
2	90	5.5	5.5	80	2,000
3	90	5.5	5.5	80	2,000
Wharf 1	200	10.0	10.0	200	15,000
2	200	10.0	10.0	180	15,000

STEVEDORES: Agent will arrange stevedores.
MEDICAL: Agent can arrange doctor who understands foreign languages.
TANKERS: No berthing facility for commercial tankers. Only U.S. Naval Base, Yokosuka, has berthing facilities.
FRESH WATER: Available by barge or ex wharf. 50% additional charge in case of bad weather or out of office hours.
FUEL: Most grades of domestic and bonded oil are available from Yokohama or Kawasaki.
GANGWAY/DECK WATCHMEN: Agent arranges watchmen.
OPENING/CLOSING HATCHES: Stevedores or crew carry out this work.
CUSTOMS ALLOWANCES: Tobacco: 2 packets per day. Spirits: 1 bottle when more than 1 month voyage; 2 bottles when more than 6 months voyage.
CONSULS: None.
REPAIRS: Dockyards available for all repairs.
DRY DOCKS: 1 – 475×19.5 ft.; 1 – 352×15.75 ft. 5 large-size slips; 1 rigging wharf.
REPATRIATION: No facilities exist. If necessity occurs, Yokohama Immigration Office will attend.
AIRPORT: 40 km. to Tokyo International Airport.
TIME: GMT plus 9 hours. No alterations during year.
HOLIDAYS: Cargo work usually daytime. On Saturday afternoon and Sunday, National holidays, Municipal Inauguration Anniversary, and December 31, January 1, 2 and 3 no cargo work.
POLICE/AMBULANCE/FIRE: Police, 110; Ambulance/Fire, 119.
TELEPHONES: Facilities now underway.
GENERAL: Port situated in city confines, a portion of port is used by JMSDF and also by the U.S. Navy according to Japan-U.S. Security Treaty.
AUTHORITY: Yokosuka City.
AGENT: Sub-Agent of Dodwell & Co., Tokyo. Sagami Unyu Kabushiki Kaisha, Taura Minato-Machi, Yokosuka-shi, Kanagawa-ken. Cables: Sagami Yokosuka Taura. Tel. Yokosuka (0468) 61–3111. Telex 3852–528.

Jordan

AQABA: 29.31 N. 35.01 E.

DOCUMENTS:

1 copy Freighted Manifest, stating all details.
6 copies Unfreighted Manifest.
2 copies of Unfreighted Manifest not showing shippers nor consignees but weights and measurements.
1 set of non-negotiable Bills of Lading.

All Manifests should bear the following clause: "This is to certify that the above vessel has not called and is also not scheduled to call at any Israeli ports nor is owned by any Israeli Company, also it is not included in the Black List." All the above documents are to be airmailed to the Agent's Head Office in Amman and not Aqaba.

Documents required by the authorities for free pratique:

7 copies Crew List.
7 copies Passenger List.
1 copy Stores List.
1 copy Crew Declaration List.
1 copy Vaccination List.

The following forms to be filled:

2 copies of Maritime Declaration Form.
1 Customs Declaration Form.
2 copies Vessel's Specification Form.
1 copy Pilotage Form.

The following documents to be produced for checking:

(a) Log Book.
(b) Ship's Registry Certificate.
(c) Derating Certificate.

PILOTAGE: Compulsory Pilotage in that area of Aqaba Bay North of an imaginary line 270° from Al-Breij Point. Ships in harbour requiring a Pilot should by day hoist "G" flag below a ball or shape, one hour before ship is ready to move; and "B" flag by night with a red over white. The sound signal is four long blasts. Advance notice of the ship's requirement of pilot service should be given to the Agent who will advise the Harbour Master or his representative. It should be noted that vessels may proceed to sea from the anchorage without taking a Pilot, but for ships leaving the berths alongside, pilotage is compulsory, and the signals described above should be made.

ANCHORAGE: About 0.5 miles from shore in depths of 15 to 30 fathoms. Ships awaiting discharge can easily anchor in deep water anchorage which can accommodate 25 ships or more.

MAX. SIZE: Up to 20,000 d.w.t. Max. draft 32 ft. Phosphate loading berth: up to 50 ft. draft.

TUGS: The tugs available at Aqaba are only for towing barges and handling ship's line during berthing but no salvage tugs are available.

HEALTH: A ship arriving from sea should, in addition to the "G" flag for Pilot, hoist its signal letters and "Q" flag to request free pratique if it is healthy. If there are passengers to land, "I" flag should be hoisted. The port doctor boards the vessel together with a representative of the Port Dept., Customs Dept., Passport Dept., and Police. If the vessel has to anchor first, boarding the vessel takes place at anchorage. If the vessel berths alongside, then the aforementioned representatives board the vessel. Health certificates of crew and passengers are required.

RADIO: Aqaba Radio station call sign JYO. Watchkeeping hours GMT 0500 to 1700. Station has transmitting frequencies presently only 500 and 477, however, 2182, 2612.5, 4326.5, 6479, 8723 are reserved.

Station can receive on all M/F and H/F frequencies. Station listens continuous, 500 kc/s. at present; will listen 6200 to 6300 A1 H to H plus 10.

VHF: Aqaba Port Control at Harbour Master's office listen from 0700 to 2400 hrs. local time on VHF Channel 16, working Channels 10 and 12 for service messages. Pilots listen VHF Channel 16.

BERTHING:

General Cargo Berth: Three medium-size ships or two large ships can berth alongside. The depth is 10 m. (32 ft.) at low tide.

Phosphate Loading Berth: The berth is 210 m. long and 32 ft. depth. It is situated South of the General Cargo Berth and is especially built to load phosphate. The berth is designed to accommodate ships of up to 20,000 d.w.t. In addition, pipes have been laid to supply petroleum to a nearby tank farm for the occasional import of some petroleum products. There are two main berthing dolphins with a loading tower in between, and mooring dolphins at each end. The loading tower is connected with a conveyor belt feeding the tower from two silos with a 20,000-ton capacity each. There is a short retractable boom and telescopic trunk which can be travelled forward up to a distance of 9 m. from the berthing face to plumb the centre of the hold of a ship. The loading capacity is 500 t.p.h. The guaranteed loading rate by the Phosphate Company is 2,000 tons per weather working day of 24 hours. Vessels should arrive at the berth with as large an amount of water ballast as possible, both to facilitate berthing (as there is no tug) and to reduce the height from water-line to hatch coaming. This height should not exceed 30 ft.

Bulk Export Berth "B": Is 180 m. long with 15.5 m. (50 ft.) depth of water at low water spring tides and is designed for berthing and loading 100,000 d.w.t. bulk carriers. The travelling ship-loader has a capacity of 1,500 tons of phosphate per hour and provision is made in the design for the installation in the future of a second similar shiploader to give a total loading capacity of 3,000 t.p.h. Phosphate for loading into ship is weighed on a continuous recording belt weigher (accuracy +0.5% between 25% and 150% of rated capacity) and is loaded through a telescopic pivoting feed chute. Clearance above high water level is 18 m.

Lighters Wharf: The Lighters Wharf has a length of 215 m. and a width of 10 m. and a depth of about 9 ft. About 10 lighters can be discharged alongside.

Floating Berths: 2 berths. Each designed for one general cargo vessel 15,000 d.w.t. and 30 ft. draft, or 2 general cargo vessels of about 3,000 d.w.t. and 2 Roll-on/Roll-off ships each of 7,000 d.w.t. Also see "Developments".

STEVEDORES: Stevedoring Company's working hours are from 0800–1600 hrs. Work has to start at 0700 hrs. and end at 1600 hrs.; therefore, there are two compulsory overtime hours in the morning, from 0600 to 0800 hrs. and 1 hour in the afternoon, i.e. from 1600 to 1700 hrs.

Ships Working Hours: Ships can work round the clock, depending on Captains' option and the number of ships available in port. Opening hatch of a ship is allowed up to 2200 hrs. and subject to Port Authority agreement. Friday is the official weekly holiday, however, work is carried on, on the ships.

TANKERS: Berth in daylight hours only.

MEDICAL: The Health Section of Aqaba Port Department gives all medical services required and responds to any urgent call by radio before arrival. A government hospital is available and is satisfactorily staffed by doctors. A doctor may be called on board at any time day or night, to attend to sick crew or passengers by arrangement with the Agent.

FRESH WATER: Can be supplied to ships berthed alongside.

FUEL: Bunkering is inadvisable. In case of necessity, fuel oil can be transported from the refinery in Zerka by tank lorries with a capacity of 12 tons each. Three day's notice must be given in order to arrange transport.

GANGWAY/DECK WATCHMEN: Customs provide a guard who has to be given full board and lodging. Ships are also supplied by local watchmen through Agents.

HOLIDAYS: Arbor Day (January 15th); Arab Summit Conference Day (January 17th); *Thil-Hijja 10, Eid El Adha (January 14th); Arab League Day (March 22nd); *Moharram 1, Islamic New Year (March 3rd); Independence Day (National Day May 25th); *Rabi' El Awal 12, Prophet's Birthday (April 13th); H.M.'s Accession to the Throne (August 11th); Birthday of Crown Prince Hassan (September 5th); *Rajab 27, Al-M'raj Al Sharif (May 24th); Birthday of H.M. the King (November 14th); Arab Renaissance Day (November 22nd); *Shawal 1, Eid El Fitr (November 26th).

*Dates fluctuate due months being lunar months.

CONSULS: No consul or vice-consul available at Aqaba. All Consular Offices in Amman, the Capital.

TIME: GMT plus 2 hours.

REPAIRS: A shipyard has been established to build fishing boats and trawlers, barges, tugboats and undertake minor repairs. Welding can also be carried out.

DRY DOCKS: No dry docks are available at Aqaba.

AIRPORT: From Aqaba Air communication: Alia, (The Royal Jordanian Airlines) to Amman 4 flights weekly. Distance to Amman International Airport, 355 kms.

GENERAL: Masters are warned that during the Winter months strong Southerly gales can develop within two hours followed by swell. In such case it may be necessary to unberth the vessel, and it should be noted that there is no tug available for this operation. Vessels in the anchorage in such weather conditions should not hesitate to weigh anchor if there is a possibility of dragging, and proceed out of the bay until the weather moderates.

DEVELOPMENTS: 4 general cargo berths under construction. It is estimated that the construction will take about 2 years, total length of the 4 new berths is 720 m.

AUTHORITY: Aqaba Port Department, Ministry of Transport, Ports, Railways and Airports in Amman.

NOTES

Please also advise Shipping Guides Ltd.

Kenya

MOMBASA: 04.04. S. 39.40 E. (See Plan Book)

DOCUMENTS:

Health Certificates: Forms obtainable from Pilot.
6 Crew Lists.
10 Passenger Lists.
Dangerous Cargo Lists.
Ship's Register.

PILOTAGE: ETA through ships' Agents, 48 hours' notice. VHF Channel 12 (Mombasa Radio VHF Ch. 16). Pilot boat 72 ft. ex-Admiralty launch, white. No signals for Pilot – call on VHF 12 (Mombasa Pilots) or by signal lamp to lighthouse. Pilot boat position one mile outside turning buoy on Ras Serani leads (301°) except for deep-load tankers (over 35 ft.) when pilot boat position one mile from turning buoy on Mackenzie leads (327°). No special bad weather regulations. Pilot ladder 6 ft. from water – must have manropes – light at night.

ANCHORAGES: No safe outer anchorage.

RESTRICTIONS: No tidal restrictions. Entry for dangerous cargo restricted to daylight. Entry for tankers over 650 ft. restricted to daylight.

MAX. SIZE: Length 820 ft. Draft 40 ft.

HEALTH: Radio Port Health Officer, Mombasa, giving last port of departure, ETA Mombasa, condition of crew, any sickness on board, passengers. Must have Q Flag until doctor visits vessel or until Pilot passes information to lower flag.

RADIO: Mombasa Radio Coast Station M/F, H/F, W/T & R/T and VHF R/T Services:

Station 5ZF (W/T) 500–524 kc/s.; traffic list 0100, 0500, 0900, 1300, 1700, 2100; Continuous watch; listening freqs. 500 kc/s.

Station 5ZF2 (W/T) 8710.4 kc/s.; traffic list 2018; schedules 2018–2030, OBS only 0000–0030, 0600–0630, 1200–1230, 1800–1830; listening freq. 8354–8374 kc/s.

Station 5ZF3 (W/T) 13065 kc/s.; traffic list 0448, 0830, 1518; schedules 0448–0530, 0830–0900, 1518–1545; listening freq. 12531–12561 kc/s.

Station 5ZF4 (W/T) 17175.2 kc/s.; traffic list 1248; 1248–1315; listening freq. 16708–16748 kc/s.

Station (R/T) 2595, 2181 kc/s.; traffic list 0603, 1203; schedules 0600–0630, 1200–1230; continuous listening watch outside Skeds 2182 kc/s.; listening freq. 2182 kc/s.

Station (R/T) 4409.4 kc/s.; traffic list 0533, 1303; schedules 0530–0600, 1300–1330; listening freq. 4104.4 kc/s.

(R/T) 8805.6 kc/s.; traffic list 0633, 1233; schedules 0630–0700 1230–1300; listening watch on 8255.6 kc/s 0330–1530 listening freq. 8255.6 kc/s.

Mombasa Radio also provides continuous R/T service on VHF for the benefit of ships in and around Mombasa within radius of 30 miles. Channel 16 for calling and Channels 26 and 27 for working. All times in GMT.

TUGS: Tugs join vessel inside harbour between Ferry and Kilindini reef. Tug lines no additional charge.

BERTHING: All berths fendered. Nos. 89 and 10 and Shimanzi Oil Terminal berths, no berthing on ebb tide, with range of 6 ft. or more. Kipevu Oil Terminal berthing on first of ebb with tankers over 650 ft.

CARGO HANDLING No. 9 berth has been arranged for bulk export of soda ash. No berths for roll-on/roll-off traffic but a site is being considered. No container berth is available, but certain facilities at berths No. 16 and 17 available for containerised cargo in 1976.

Mbaraki cement berth for bulk export of cement clinker and automated loading of cement in bags is now in operation.

Shimanzi oil terminal now handles all imports of bulk vegetable oil as well as all other oil products except crude oil.

Bulk cargoes are at present handled by grabs, railway wagons, and lorries.

STEVEDORES: ETA preferably 48 hours in advance in order to arrange gangs. Advisable notify Habour Master ETA and also give quantity of cargo to be loaded and/or discharged and other matters of importance.

MEDICAL: In emergencies necessary to receive advance notice. Hospital facilities available. Inoculations required – smallpox (compulsory), yellow fever (endemic zones in Africa and South America), cholera (all ships from Asia).

TANKERS: Discharge and load white oils at Shimanzi. Discharge and load Heavy oils at Kipevu.

Shimanzi Oil Terminal: T-head jetty with 200 ft. long berthing head. Depth alongside 32 ft. LWOST. Bunkers and fresh water available. Slop reception facilities for up to 6,000 tons.

Kipevu Oil Terminal: T-head jetty with 225 ft. long berthing head. Tankers up to 65,000 d.w.t. berth at dolphins alongside jetty head; depth alongside 44 ft. LWOST. Max. length 820 ft. Max. draft 40 ft.

DENSITY: 1025.

FRESH WATER: Available at all berths in stream ex-tug at Harbour Master's discretion or barge of 140 tons capacity. 30 t.p.h. on quay.

FUEL: *Main Quay Berths:* Marine fuel oil, viscosity 1500 seconds. Marine diesel fuel. Gas oil cannot be delivered by pipe-line at these berths but delivery can be made up to only 10 tons by bulk lorries at extra delivery cost. Minimum 48 hours' notice required. Quantities of 10 to 30 tons can be made by rail tank wagon if 48 hours advance notice given. Thin fuel oil viscosity below 1500 secs. can be delivered at all berths through Fisher blender. Only 1 Fisher blender available and can deliver fuel to only 1 vessel at a time.

Shimanzi Oil Terminal: All grades, i.e. fuel oil, marine diesel, gas oil and thin fuel oil (through Fisher blender).

Cased Oil Jetty: Only marine diesel and gas oil can be delivered at this jetty.

Kipevu Oil Terminal: Only fuel oil of viscosity between 1500 secs. and 3500 secs available. Fuel oil viscosity below 1500 not available. At least three days clear notice required by EA Oil Refineries for arranging bunker delivery. Not possible to deliver any marine diesel or gas oil either ex pipe-line or rail tank-wagons/bulk lorries at this berth.

GANGWAY/DECK WATCHMEN: Watchmen available for gangway and deck and recommended.

OPENING/CLOSING HATCHES: Normally done by stevedores except Macgregor type hatches.

CERTIFICATES: Normal port requirements for safety cargo equipment.

CUSTOMS ALLOWANCES: Tobacco, 200 cigarettes for each crew member for 8 days. Wine and/or Spirit, 8 small bottles of beer for each crew member for 4 days.

CARGO GEAR: All cargo gear supplied by stevedores.

IDENTIFICATION CARDS: Not required.

CONSULS: The following countries are represented in Mombasa: Germany, British High Commission, India, Belgium, Denmark, France, Italy, Norway, Sweden, Netherlands, Greece.

REPAIRS: Normal running repairs.

DRY DOCKS: Vessels up to 2,000 tons, length 320 ft., beam 50 ft. New dry dock for vessels up to 18,000 g.r.t. Length of dock 590 ft., width of entrance 80 ft. All repair facilities available. Mobile cranes up to 12 tons and fixed cranes up to 30 tons capacity.

REPATRIATION: Possible. Facilities available.

AIRPORT: About 7 miles from port. Served by regular airlines. Mombasa/Nairobi 4 flights a day. Mombasa/Dar-es-Salaam 4 flights a day. From Nairobi regular lines all over world.

TIME: GMT plus 3 hours.

HOLIDAYS: Weekdays: 3 shifts – 0700–1500 hrs. 1500–2300 and 2300/0600 hrs. Saturday: 2 shifts – 0700–1230 and 1230–1800 hrs. Sundays: 1 shift – 0700–1500 hrs. New Year's Day; Good Friday; Easter Monday; Labour Day (1st May.); Madaraka Day (1st June); First Monday in August; Kenyatta Day (20th October); Independence Day (12th December); Christmas Day; Boxing Day (26th December).

Also for persons belonging to Islamic Faith: Idd ul Azha and Idd ul Fitr. 1st May (Labour Day) and Christmas Day are normally only holidays on which port closed except for necessary pilotage of ships in and out and for dealing with mails, passengers and their baggage, livestock and perishables. On other public holidays restricted working at Mombasa may be carried out at overtime rates. Overtime rates also apply on Saturdays after 1500 hrs. and on Sundays, and to third shift between 2300–0600 hrs.

POLICE/AMBULANCE/FIRE: In Port Area – Police 567 444; Ambulance 33; Fire 333.

TELEPHONES: Telephones supplied on board. Charges include cost of local calls. Telephone essential per port regulations.

SERVICES: All solvents for tank cleaning available. Repairs to Gyro compass, radar and most other electronic aids to navigation. Compass adjusting by arrangement with port.

SHORE LEAVE: All crew members allowed ashore and to travel except those from Socialist countries who must stay on Mombasa island. This does not include Tanga and Dar-es-Salaam.

PORT REGULATIONS: White tankers and vessels carrying explosives enter port daylight only. No vessels carrying explosives or dangerous cargo allowed to berth at Main Quay.

DELAYS: Normally one or two days for loading and discharging and for bunkering. Usually no waiting days.

SHIP'S OFFICER'S REPORT: The Boarding Customs require crew declarations on their special form duly signed by each individual member of crew. The excess private property, or the items not required during the ship's stay in port, are to be collected and placed in a locker or room and sealed by the Customs. This seal has to be kept intact even in the case of the vessel sailing from Tanzania to Kenya or vice versa. On arrival at the next port, the previous Custom's seal is replaced by the local authorities. No new crew declaration is needed if once filed at first port. However, it is recommended that an extra copy of the crew declaration is kept on board as a record in case it is requested by the local authorities.

AUTHORITY: Kenya Ports Authority.

AGENT: East African Commercial and Shipping Company, Kilindini Road, PO Box 95103. Tel. 26251/2. Telex 21151. Cables "Kenship, Mombasa".

Korea (North)

CHUNGJIN 41.43 N. 129.42 E.

DOCUMENTS:
8 Crew Lists.
2 Vaccination Certificates.
2 Lists showing currency, gold and valuables in possession of crew members.

The following information should be radioed to port authorities before arrival:
Number and nationality of crew.
Name of last port.
Ports called at during last month.

PILOTAGE: On reaching North Korean waters, vessels required to give a position report every 3 hours to KCSA Chungjin. Pilot and Port Authorities board in position 41.30 N. 130.05 E. where vessels should await Pilot. Water depth too deep to permit anchoring.

ANCHORAGE: No possibility of anchoring outside harbour limits.

CLEARANCE: On arrival in port, the radar, echo sounder, main and emergency transmitters and all optical equipment is sealed. An inspection team board the vessel to verify currency and valuables declarations. Seamen's Books required to be stamped with landing pass.

BERTHING: Berth No. 1 max. draft 24 ft. Berths 2 and 3 max. draft 27 ft. Berths No. 4 and 5 max. draft 28 ft.

CARGO GEAR: Vessels loaded and unloaded by ship's gear. At berths 4 and 5 there is a conveyor belt facility for coal loading.

SHORE LEAVE: Seamen not allowed to visit other vessels, or leave the harbour area.

Unauthorised money changing forbidden, and it is prohibited to take Korean currency out of the country.

No bathing in harbour area.

HAEJU (Haijuube) 37.59 N. 125.42 E.

SHIPMASTER'S REPORT: August, 1978

DOCUMENTS: Same as Nampo, but Korean Forms must also be filled in on arrival.

PILOT STATION: B.A. Chart 1258. Situated between following points:

37° 40′ 30″ N.	125° 35′ 00″ E.
37° 42′ 00″ N.	125° 35′ 00″ E.
37° 42′ 00″ N.	125° 32′ 24″ E.
37° 40′ 30″ N.	125° 32′ 24″ E.

The ship should anchor and wait. It is imperative to anchor within Pilot Station Area, which is used by North and South Korea, otherwise the Authority will not board the vessel. Approaches to Haeju are not covered by B.A. Charts, Korean (Nos. 15–1354, 1328, 1329) not obtainable. Pilot boards together with Quarantine and Immigration officer. The inspection starts immediately, all crew must have Seaman Book for identification. Food stores and pantries also inspected. Pilotage is carried out depending on tide and ship's draft, daytime only. Berthing at slack tide. After berthing arrival inspection continues (Harbour Master, Custom, Coast Guard).

ANCHORAGE: Ships sometimes complete loading at the Anchorage in position 37° 55.5″ N., 125° 46′ E., depth 11.4 m., but probably swinging space for one ship only. Ships waiting for berth anchor in the vicinity of the wharf. With no chart it makes the situation difficult, as there are no lights or light buoys. Position only obtained by radar. One anchor used due to strong tide which sometimes reaches 4 knots.

ARRIVAL ADVICE: The arrival notice to be sent to KZSA Haeju giving all particulars same as Nampo. first contact via Haeju Coast Radio Station, call sign HMJ, to be made 48 hours before arrival. Earlier contacts via Shanghai Radio.

RADIO: Haeju Radio, call sign HMJ.

BERTH: Old berth described in China Sea Pilot, Vol. III, page 540. Extension works in progress. Shore cranes. Depth at low water about 6.8 m.

EXPORTS: Zinc concentrates, cement from the new factory connected with Port by conveyor belt.

FRESH WATER: From hydrant alongside, at anchor by barge (dredger).

FUEL: In restricted quantities, price unknown.

SERVICES: Provisions and Laundry, available through Seamen's Club.

AUTHORITY: Port Master and Harbour Master.

AGENT: The Ocean Shipping Agency of the DPR Korea, Cable KZSA.

NAMPO (Chinnampo): 38.43 N. 125.25 E.

(See Plan Book)

Shipmaster's Report No. 1

DOCUMENTS:
8 Crew Lists.
2 Vaccination Lists.
2 Lists showing currency, gold and valuables in possession of crew. Bonded stores must be declared but not sealed.

ARRIVAL ADVICE: The following information should be radioed to KNSA Nampo before arrival:

(1) ETA Nampo Station, Lat. 38° 37′ 30″ N., Long. 124° 49′ 30″ E.
(2) Nationality.
(3) Gross Registered Tonnage.
(4) Net Registered Tonnage.
(5) Deadweight.
(6) Length overall.
(7) Height of Freeboard.
(8) Speed.
(9) Last Port of Call.
(10) Colour of ship's hull.
(11) Number of crew and passengers.
(12) Hatch Loading/Discharging cargo Plan.
(13) Draft.
(14) Ship's position together with ETA 24 hours before arrival within area connected positions 37° 00′ N. 124° 30′ E., 38° 08′ N., 123° 35′ E., and 39° 50′ N., 124° 07′ E. Also vessel should advise position and time passing above connected lines.

PILOTAGE/ANCHORAGE: Pilot and Port Authorities (Quarantine Officer and Immigration Officers) board at position 38° 37′ 30″ N. 124° 49′ 30″ E. where vessels should anchor awaiting Pilot.

Night pilotage prohibited, according to port regulations.

CLEARANCE: After embarkation of Port Authorities at Nampo Station the Radar, Echo sounder, VHF, DF, Radio Room and all optical equipment is sealed. On arrival in Port, Customs Officers board the vessel and together with Immigration Officers search the whole ship.

Seamen's books required to be stamped with landing pass, also seamen's books are taken ashore by Immigration Authorities for formalities.

BERTHING: Coal berth can accommodate vessels up to 20,000 d.w.t. There are 2 conveyor belts for coal loading but 1 only can work at a time. Conveyor belts are not movable, the vessel has to shift. Vessels loaded and unloaded mostly in the roads by ship's gear. There are 3 other berths but have no information.

RADIO: Nampo Radio. Call sign HML.

FRESH WATER: Only available by barge.

TIME: GMT plus 9 hours.

SHORE LEAVE: Seamen allowed to go ashore by boat or bus only. Seamen are not allowed to leave harbour area. In order to visit other vessels in port, application should be made to Immigration Authorities.

GENERAL: *Currency:* It is prohibited to take Korean currency out of the country.

Bathing: Prohibited.

Fishing: Prohibited.

Provisions: Limited quantities available at the Seamen's Club.

Shipmaster's Report No. 2

Information covering Nampo, North Korea, previously known as Chinnampo. See in connection with this B.A. Chart 1257 and 1656, China Sea Pilot III.

The following general information was produced by the navigating officers of a vessel in 1974.

NAVIGATIONAL INFORMATION: Pilot boarding point now 38° 37′ 5″ N., 124° 49′ 5″ E. Wreck at 37° 38′ 2″ N., 124° 48′ 2″ E., 3 masts above water at all states of tide. Radar echo good at 6 miles. Buoy – old position 37° 37′ 4″ N., 124° 51′ 4″ E., moved to 37° 37′ 2″ N., 124° 50′ 7″ E.

Light Sei To – flash every 23 sec. Visible for 8 miles
Light buoy at 37° 37′ 4″ N., 124° 53′ 6″ E., flashes 18 sec.
Light Shimai To flashes 18 sec.
Light San extinguished
Light Chiri extinguished
Light Hi To extinguished
Light at 38° 41′ 7″ N., 125° 18′ 1″ E., (Bachishin) flashes 30 sec.
Light at Nanryoki extinguished
Light at 38° 43′ 3″ N., 125° 24′ 6″ E., extinguished.

PILOTAGE, ANCHORAGES, INSPECTION AND CLEARANCE: The Pilot boarding point is at the same time the outer limit of Nampo Harbour and the clearing inwards point. To await Pilot and further instructions before proceeding into Nampo, vessels must wait here. Information can be obtained via coastal radio Nampo (details in Nautical Wireless Service Standing Instructions), VHF is not available.

The anchorage at the pilotage waiting point is good, and the bottom is a thin layer of grey mud with clay underneath it. With wind from the S.W., there is a slight swell. Depth of water between 25 m. and 26 m., vessels should anchor with a chain length of at least 100 m. on the capstan and calculate adequate room for swinging, since there is a very strong tidal flow at all states of the wind and weather, running up to 4 kn. according to our observations.

The Pilot comes on board with clearance authorities. As pilot cutter (also no VHF) a normal tug is used, which in Winter is also used as an ice-breaker. The tug does not display a Pilot's flag, only the national flag. The hull of the tug is black, superstructure white with large Korean characters on the front of the bridge. Pilotage only available during daylight hours.

At clearance inwards point (pilotage boarding point) all binoculars, including bridge binoculars, and photographic equipment is gathered together and sealed for the total time in port. It is only released after the Pilot leaves the vessel on departure from the port. Likewise all echo-sounding, radar, direction finding equipment is sealed. The use of such equipment and filming and photography in North Korean ports is completely forbidden.

From the clearance inwards point the journey to the anchorage in front of the town is usually at full speed for most of the way. The anchorage is selected by the Pilot. The Pilot gives a good impression and from our observations knows his job well. However, one can only expect very rudimentary English from him. The same applies to the clearance authorities who have only a very few words of English. Clearance proceeds slowly but is carried out very correctly.

GENERAL INFORMATION: When at anchor in front of the town, further official authorities come on board. These check the whole ship, and go through the deck and engine room areas accompanied by one chosen member of the crew. Whilst the ship is being examined, all other crew members must remain in their cabins. The crew member accompanying the authorities must have his seaman's book with him as identification. When the authorities leave the ship finally they take the log away, and bring it back after a few days. Going ashore is permitted, but normally only in the port area. There is a seaman's hostel there. Travel further inland is possible, but only by giving 24 hours prior notice to Immigration via the ship's Agent. Also from time to time it is possible for crew members to fly out, but this must be arranged via the state shipping Agent. Visits to other ships is also possible, but only by giving 24 hours prior notice to Immigration. Radios and cassette recorders may not be taken on land or even on deck. Their use is only permitted within the ship and cabins. Fresh water and fresh food are available. In the roads, water is delivered by water boats. Removal of rubbish is also possible by due notice through the Agent, and is even possible at the anchorage. Boat manoeuvring can likewise take place, but it must be reported, and may only take place in the vicinity of one's own ship.

For clearance inwards, the following documents are required:

7 crew lists.
1 list of items in possession of crew divided into gold, valuables, money, signature.
1 vaccination list.
1 maritime declaration of health.
1 passenger list, even if none on board.
1 narcotics list.
1 list of tobacco and personal goods.

The authorities bring a list of provisions with them and fill it out after declaration on board. Stores, such as alcohol and cigarettes are not sealed.

The health authorities place greatest score by cleanliness of toilets, refrigerators, food stores, kitchens, pantries, hospital and first-aid station.

Generally, it may be stated that the ship's broker and Agent speak and understand good English, but from the authorities normally one can expect no knowledge of Western languages.

The port roads offer anchorages for at least 15 sea-going vessels and enough room for swinging. However, in each case at least 170 m. chain should be allowed so that the vessel lies securely. The tidal current, in accordance with our observations, runs at a good 4 kn. The anchorage bottom is good and comprises grey mud. The depths of water shown in the charts are, in accordance with our observations, roughly correct.

To the West of the port on the town shore there is a large shipyard with a mobile gantry crane over a slipway under construction. The slipway is about 150 m. long. Normally, the crane is at night directly on the bank (high water mark) is illuminated and thus constitutes a good bearing, particularly at night, since otherwise no long-range port lights are available.

The position of the crane is about 34° 43′ 2″ N., 125° 24′ 1″ E. This area where the shipyard is located is designated as "Iron works" in chart 1656 map of Chinnampo Ko. The waterside there no longer has an inlet, but has been straightened out, and building work is still in process. See plan section of "Guide".

Likewise building works are in progress along the whole shore line between the shipyard and Nampo Ki. The shore line is also straightened here, and to all appearances has been developed as anchorage and repair yard for the Korean Navy. The 2 red/black buoys to the South of the iron works in the chart are no longer there. In this area there is only a small fixed buoy for guard boats and fishing craft.

In the middle of Shienshin Island there is a 9-storey white hotel, which is a good landmark by day.

The tidal pole in front of Nampo Ki is no longer available. On the Southern end Nampo Ki is a bunker with a small house on top. The lower part of the house is pink and the upper part white. The West pier of Hibatsu To has 5 mobile port cranes, with lifting capacity up to 5 tons. At the Southern end of the pier are 2 new large warehouses. A floating crane is available with a capacity of about 160 tons. On the Western pier is likewise a small warehouse and 2 mobile port cranes (up to 5 tons). At the Southern end of the Western pier, are two berths for deep sea freighters with a good 9 m. water depth N.W. alongside. At the Southern part of the Western pier there is a good 8 m. of water along a length of some 210 m. At berth 1 (West pier, Southern berth), vessels up to 32 ft. draft can go alongside in normal water conditions. The depth of water in the inner part of the port could not be exactly determined, but judging by the vessels there must be about 5 m.

The old coal pier has a berth with at least 10 m. depth of water. East of this pier is also a further coal pier, equipped also with conveyor belts and about 10 m. depth of water alongside.

For berthing and unberthing there are one large and three small tugs available. The large tug acts as pilot craft and for the authorities to visit for clearance. It has been previously described.

From our observations, in the inner roads loading and unloading rarely takes place. There are only a few lighters available. As the port is overloaded, a long waiting time must always be allowed for (at least 14 days).

Medical care for crew members here is somewhat difficult, since one tries with all means to avoid having to have the crew member transferred beyond the confines of the port. In this connection, the doctor comes only once on board and a decision is taken as to whether or not a visit to hospital is necessary. For such a hospital visit one has further to go through the Agent to the authorities to obtain permission to go beyond the port area.

Below are some soundings of the roads. The vessel's draft = 8.35 m. Times in GMT. Wind in degrees and knots. First bearing is Nampo Ki, second bearing is the pier light, fixed red, in front of the east pier:

Weather	*Bearing*	*Time*	*Measured depth, taking into consideration vessel's draft* m.
15° 8 kn.	344°, 38°	2330	21.15
100° 8 kn.	355°, 42°	0130	19.93
360° 5 kn.	355°, 39°	0715	15.97
340° 5 kn.	343°, 37°	0900	18.41
070° 9 kn.	340.5°, 38.5°	2330	21.15
060° 5 kn.	343°, 39.5°	0100	21.46
Circulating 5 kn.	324°, 41°	0430	16.88
270° 13 kn.	339°, 37°	0000	21.46
300° 20 kn.	357°, 40.5°	0300	19.93
290° 10 kn.	345°, 40°	0840	18.43
Circulating 5 kn.	360°, 45°	0640	16.58

The pier structures have shuttering walls at the bottom, and the upper part is composed of equal-shaped stone blocks. At the mooring points fenders are composed of car tyres strung together on wires. The pier itself is in a satisfactory condition. Rail connection is available, and lorries may run along it. Water connections are also available. As the two cranes on pier berth No. 1 have very large beams, they are often positioned between two hatches and then work the two hatches alternately.

Loading and unloading is made difficult since it is not possible to obtain precise information as to the number of gangs, the time they will turn up for work, whether they will work with their own equipment or with cranes or with the mobile cranes available. It continually happens that suddenly port workers will appear or disappear, although shortly beforehand the Agent will inform to the contrary.

Telephone connections with Europe are possible. Connections can be obtained at the Seaman's Club in the port after 1600 hrs. On average it takes an hour to get through. It is advisable always to try to get a line to Moscow, and then ask for the required connection oneself in English from the Moscow operator. This noticeably hastens the connection. Comprehension is at times very bad, calculation of charges is dreadful, and one must be prepared to pay three or four times the price as would appertain for a similar call in Europe.

The local currency is the Won. 1 US dollar = approx. 2.15 Won. In the Seaman's Club all customary Western currencies can be changed into Wons.

Loading rigging can be positioned from the ship. If for example this has to be done at night, it must be discussed in advance with the Agent as to whether this has to be done by the ship or the port personnel. If the rigging is done by the port personnel, it must be checked carefully.

Clearance outwards occurs in the harbour roads and not at the pier. It takes a good 3 to 4 hours. Here also, all crew members must be in their cabins for checking purposes, and if the authorities require it, personnel must be available to guide them around the ship. On leaving the port, yet another list must be presented of currency which each crew member has spent in Korea.

They are only interested in foreign currency which has been exchanged for Wons in the Seaman's Club, since Wons may not be exported.

On the journey out from the port, the Pilot is accompanied by an assistant and member of the coastguard. The latter, shortly after coming on board, removes all seals from apparatus sealed when coming into port. The Pilot leaves the vessel at a position 38° 35′ 5″ N. and 124° 55′ 5″ E.

Herewith some soundings, taking into consideration draft of vessel. First bearing – pier light East side Hibatsu To – fixed red. Second bearing chimney at 38° 44′ 1″ N. and 125° 25′ 9″ E. (shown on the chart as Chy.)

GMT	*Weather*	*Bearing*	*Line sounding* m.
0030	Calm	338°	21.78
	1022 mb	43°	
0130	Calm	338°	
	1022	42°	24.79
0430	Changeable	335.5°	21.03
	1022	40°	
0530	250° 14 kn.	312°	
	1022	38°	24.18

Korea (Republic of South)

GENERAL:

Foreign flags: Ministry of Transportation issued following instructions regarding entry and exit of foreign flag vessels in South Korea waters.

Item 1: Director, local Marine Bureau shall not grant permission on entry of foreign flag vessels under ownership of North Korea, North Vietnam and Red China.

Item 2: Director, local Marine Bureau shall not grant permission on entry of foreign flag vessel bound for North Korea or falling short of 90 days of departure from ports of North Korea.

Item 3: No restriction shall be applied on entry of foreign flag vessels unless same appertained to above clauses in accordance with internationally accepted practices.

CHINHAI: (Jinhae)

SHIPMASTER'S REPORT: 1977

LOCATION: 35° 09′ N., 128° 40′ E. (Town); 35° 07′ N., 128° 42′ E. (Pier).

DOCUMENTS:

8 Cargo Manifests.
8 Crew Lists.
4 Stores Lists.
3 Lists of Crew's Personal Effects. Tobacco/Spirits.
1 Vaccination List.
1 Health Declaration.
2 Currency Lists.

All documents are Standard Form. Although currency lists are required, there are no restrictions on importing or exporting either Korean or other currencies.

PILOTAGE: Pilotage not compulsory but recommended. Pilots are ordered through Agents and board vessel about 10 cables West of Kadok Do Island. VHF not available. No pilotage during night hours. Pilot boat is a wooden launch exhibiting International pilotage signals.

ANCHORAGE: Recommended 7 cables in Northwesterly direction off Tongdu Mal Lt. Ho. (Kadok Do.). Depth 25 m. Good anchorage is sand and mud. Quarantine anchorage is located about 1 mile N.N.W. from Chori Som Island.

RESTRICTIONS: Curfew effective from 2400 hrs. until 0400 hrs. daily.

HEALTH: Radio pratique not available. Pratique granted after inspection.

RADIO: Pusan Radio, call-sign "HLP".

TUGS: Required for mooring and unmooring. 2 tugs available of 600 and 1,000 h.p.

BERTHING: Chinhai is a principal naval base. Vessels drawing up to 17 ft. can be accommodated alongside inner harbour.

A buoyed channel with a depth of 36 ft. MHW leads from East of Madang So, to the only berth available for deep-sea vessels about 1.5 miles N.E. The berth, about 660 ft. in length, belongs to the Chinhai Chemical Co. and can accommodate vessels with a maximum draft of 34 ft.

Depth-sounding alongside showed at least 43 ft. 3 in. at HW. (officially 34 ft.). Distance from HW level to deck of pier 2.10 m. Bottom thick mud, and density 1025.

Vessels not exceeding 34 ft. saltwater draft berth 2 hours prior HW., and discharging commences immediately.

The berth is equipped with 1 grab only, and with conveyor-belt to nearby factory. The berth is used for discharging phosphate and potash, and very few general cargoes are handled. Discharge rate for phosphate is a maximum of 8,000 tons per 24 hours, with average of 6,200 tons.

STEVEDORES: Work is continuous throughout 24 hours including Sundays, and without mealbreaks.

MEDICAL: Attention available.

FRESH WATER: Available ex-barge from Masan, Min. 200 tons at US $3.00 per ton.

FUEL: Available ex-barge from Masan.

CONSULS: Nearest at Pusan.

REPAIRS: Minor repairs only.

GANGWAY/DECK WATCHMEN: Available and recommended.

REPATRIATION: Possible from Pusan.

CUSTOMS ALLOWANCES: No restrictions. Stores remain unsealed.

TIME: GMT plus 9 hours. No alterations.

AUTHORITY: Masan District Marine Bureau.

DAIPORI (Daepo): 38.10 N. 128.36 E.

Vessels bound for Daipori to load iron ore must first call at Mukho for quarantine and customs clearance.

Pilotage from Mukho to Daipori, distance of 50 miles, is not compulsory, but recommended.

INCHON: 37.29 N. 126.38 E.

DOCUMENTS: *Purser's Report:*
Arrival:

8 Crew Lists.
4 Cargo Manifests.
4 Stores Lists (Bond and shop).
4 Crew Customs Declaration.
4 Narcotics List.
4 Arms and Ammunitions List.
4 Ports of Call Lists (last 90 days).
4 Vaccination List.
2 Money Lists.
4 Passenger Lists (Marked Nil).
Derat Certificate or exemption.

All the above lists are typed on ship's plain paper.

Coasting on Korean Coast: At each port after the first, one requires the same papers but only 2 copies of each, with the exception of the Crew List, of which 5 copies are required.

Vessels with hazardous cargo must complete application to carry hazardous cargo and an application for anchorage of hazardous cargo vessel.

PILOTAGE: There are 2 Pilot stations for entering Inchon:

Ando At the Ando Light some 38 miles off Inchon, position 36° 58′ N. and 126° 10′ E. located in entrance to Channel approaching Inchon from the Yellow Sea. 48 hrs. advance notice to Agent required for vessels requesting to meet Pilot at Ando. Customary boarding point for deep-draft vessels.

Palmido – Pilotage from Palmido to Inchon or Inchon to Palmido is compulsory. This Pilot station is at Palmido Island and Light, some 8 miles off Inchon, position 37° 21′ N. and 126° 31′ E.

ANCHORAGE: *Anchorage A.* Commercial anchorages available for 9 vessels. The position of each anchorage is as follows:

Number	*Position*	*Draft acceptable*
A–1	37° 29′ 56″ N. 126° 36′ 05″ E.	42 ft.
A–2	37° 29′ 32″ N. 126° 36′ 02″ E.	31 ft.
A–3	37° 29′ 15″ N. 126° 35′ 44″ E.	39 ft.
A–4	37° 28′ 56″ N. 126° 35′ 25″ E.	33 ft.
A–5	37° 28′ 33″ N. 126° 35′ 20″ E.	29 ft.
A–6	37° 28′ 11″ N. 126° 36′ 08″ E.	42 ft.
A–7	37° 27′ 57″ N. 126° 35′ 30″ E.	28 ft. (Coaster only)
A–8	37° 27′ 48″ N. 126° 35′ 04″ E.	42 ft.
A–0	37° 27′ 23″ N. 126° 35′ 40″ E.	26 ft. (Coaster only)

Only 2 anchorages, as specified below, are allocated for vessels carrying logs to be discharged rafting in stream:

A–2E	37° 29′ 28″ N. 126° 36′ 08″ E.	28 ft.
A–3E	37° 29′ 07″ N. 126° 36′ 02″ E.	32 ft.

A sudden congestion of log vessels could cause undue delay in waiting berth.

Anchorage B. Available for 12 vessels. This anchorage is used mostly for military cargoes, partly used as quarantine anchorage and/or for commercial and Army vessels awaiting berth.

Number	*Position*	*Draft*
B–1	37° 27′ 22″ N. 126° 34′ 59″ E.	35 ft.
B–2	37° 26′ 54″ N. 126° 34′ 45″ E.	39 ft.
B–3	37° 26′ 24″ N. 126° 34′ 35″ E.	37 ft.
B–4	37° 25′ 55″ N. 126° 34′ 24″ E.	37 ft.
B–5	37° 25′ 27″ N. 126° 34′ 13″ E.	37 ft.
B–6	37° 24′ 58″ N. 126° 33′ 58″ E.	40 ft.
B–7	37° 28′ 00″ N. 126° 35′ 25″ E.	34 ft.
B–8	37° 26′ 30″ N. 126° 35′ 11″ E.	35 ft.
B–9	37° 26′ 01″ N. 126° 35′ 02″ E.	36 ft.
B–10	37° 25′ 32″ N. 126° 34′ 51″ E.	40 ft.
B–11	37° 25′ 08″ N. 126° 34′ 36″ E.	42 ft.
B–12	37° 24′ 28″ N. 126° 33′ 50″ E.	44 ft.

Anchorage C. Available for 8 vessels. This anchorage is used either for quarantine, vessels awaiting berth, or for vessels (military) discharging/loading dangerous cargoes.

Number	*Position*	*Draft*
C–1	37° 24′ 29″ N. 126° 34′ 26″ E.	26 ft.
C–2	37° 24′ 07″ N. 126° 34′ 17″ E.	30 ft.
C–3	37° 23′ 07″ N. 126° 34′ 08″ E.	35 ft.
C–4	37° 21′ 21″ N. 126° 33′ 55″ E.	42 ft.
C–5	37° 24′ 37″ N. 126° 34′ 52″ E.	42 ft.
C–6	37° 24′ 10″ N. 126° 24′ 45″ E.	30 ft.
C–7	37° 23′ 47″ N. 126° 34′ 36″ E.	42 ft.
C–8	37° 23′ 25″ N. 126° 24′ 21″ E.	42 ft.

RADIO: Address of Radio Station and call sign, Inchon Radio (HLC).

RESTRICTIONS: A peculiarity of Inchon port is the wide tidal range, i.e. max. 30 ft. difference between the low and high tides. Because of the extreme tidal range in Inchon Harbour and the strong tidal currents which result, the importance of maintaining strict surveillance of the vessel's mooring lines is emphasised. In this regard, the ship's officers and crew must be diligent in the performance of their duties. All vessels to discharge or load commercial cargoes should invariably obtain prior permission for berthing/anchoring from the Inchon District Marine Bureau at least 24 hrs. before arrival, then proceed to a nominated anchorage in the stream under direction of a compulsory Pilot.

HEALTH: The Quarantine Anchorage is located outside the harbour limit, at anchorages No. B–4, B–5, B–6, B–10, B–11, B–12, or C–1 to C–8, the position and depth of which are noted above. A vessel which sailed from an "Affected Zone" and not passed 10 days thereafter is compelled to receive 24 hrs. quarantine before entering the discharging anchorage. Quarantine is available only for the period from sunrise to sunset.

TUGS: Tankers berthing at Kyung In Energy Co. Terminal normally require three tugs for berthing and two for unberthing. All tugs operated by Korean Navy.

BERTHING: The port consists of the "Outer Harbour" and "Inner Harbour" which are separated by two islands called Wolmido and Sowolmido, which are connected by a bank. The Outer Harbour, comprising downstream of the Han River, is used as Stream Anchorages for commercial ocean steamers.

A new tidal basin constructed in the area of the present inner harbour. The dock will include entire area of the present Inner Harbour which would provide a total 1,400,000 sq.m. of water area; 3,820 m. of berthing pier including 1,160 m. of (Container Pier and max. 12 m. or 39 ft.) depth. This new dock is directly connected with the terminal of the Seoul-Inchon Highway. After completion the new dock would accommodate a total of 240,000 tons of vessels alongside the piers simultaneously, as follows:

50,000 tonners 1 ship
20,000 tonners 3 ships
10,000 tonners 6 ships
8,000 tonners 8 ships
5,000 tonners 1 ship

TANKERS: *Kyung In Energy Co. Terminal*
Designed for 50,000 d.w.t. over 50 ft. depth at LW. The marine terminal is situated at 37° 30′ 12″ N. 126° 36′ 19″ E. The face of the dolphin fendering system is on a bearing of approximately 347° true.

The vessel will be berthed alongside the main and secondary berthing dolphins with the vessel's hull against the fenders, which are an integral part of the dolphins. All the dolphins are equipped with electric capstans and quick-release mooring hooks. A navigation light and fog horn is located on the Southern Exterior Mooring Dolphin (Exterior Mooring Dolphin No. 1). A navigation light is also located on Exterior Mooring Dolphin No. 2 on the N. side of the terminal facilities. When a vessel of the 50,000 d.w.t. class is moored to the terminal, the bow and stern lines will perform the function of the breast lines. Therefore, the spring lines must be led out through the chocks on board which will provide sufficient leads ahead and astern to restrict the movement of the vessel along the face of the dolphins. In this regard, due consideration must be given to the rise and fall of the tide.

Loading Arms: There are three "Continental-Emsco" loading arms situated on the loading platform. The one to the extreme North and the middle one of the three are for the discharge of crude oil. Both are fitted with 16-in. swivel connections having 150 pound flanges. The loading arm to the extreme South is for the loading of naphtha and is fitted with a 12-in. 150-pound flange. The loading arms are designed for a working pressure of 100 p.s.i.

During the connecting and disconnecting of the loading arms to the vessel, the loading arms will be manipulated and positioned by shore personnel. During the period of time when the loading arms are connected to the vessel's manifold, they will be in the "float" position and will be self-adjusting.

General Information:

Under no circumstances should any member of the ship's crew activate or operate the controls for the loading arms. Authorised shore personnel will perform this function.

The "Continental-Emsco" loading arms will tolerate only a min. amount of transverse movement by the vessel in either direction. In other words, the movement of the vessel along the face of the dolphins is restricted. For this reason, it is mandatory that the vessel be kept in position, and that the mooring lines be properly tended. It is the responsibility of the vessel to maintain sufficient deck crew on duty to properly tend the mooring lines, and to ensure that the vessel maintains proper position relative to the loading arms.

Discharging Crude Oil:

The distance from the loading platform to the tanks is approximately 2.2 kms. (1.4 miles). A 30-in. block valve is situated near the location where the trestle joins the island causeway. Block valves are also installed in the pipe-line system near the inlet to each of the crude oil storage tanks.

There are three crude oil storage tanks on Yul Do Island. Each has a capacity of 200,000 barrels. The tanks are 48 ft. in height with an overflow at 46 ft. There are no check valves in the crude oil pipe-line system. Thus, the vessel must take precautions against back-filling due to head pressure on the system.

It may be necessary to discontinue the discharge of crude oil when changing from one tank to another ashore. The vessel will be given adequate notice for the stoppage of the ship's cargo pumps.

Ballast:

It is unlawful to discharge dirty or oily ballast water into the waters of Inchon Harbour. Severe penalties may be invoked against the vessel by the Republic of Korea in the event of pollution of harbour waters.

The centre loading arm provides a dual function. It is used for discharging ballast from the vessel as well as for the discharge of crude. The ballast flows through a 12-in. pipe-line to the ballast storage tank on Yul Do Island. This tank has a capacity of 30,000 barrels, and is situated about 1.1 kms. (0.68 miles) from the loading platform.

Loading Naphtha:

Naphtha is stored in two mainland storage tanks each of which has a capacity of 125,000 barrels. Three pumps provide the flow for shipping naphtha. Each pump has a capacity of 1,600 g.p.m. (2285 BHP). The pumps are on independent circuits. Thus, the loading rate of the naphtha can be governed by the number of pumps used.

The pipe-line from the pumps to the loading platform is 18 in. and is reduced to 12 in. on the loading platform. A block valve is located in the 18-in. pipe-line near the point where the island causeway joins the trestle. Another block valve is provided in the 12-in. pipe-line on the loading platform.

The pumps which are used for shipping naphtha can be stopped from the Marine Terminal Loading Platform, but they must be started from the mainland. Under normal conditions the vessel's deck officer on watch should give the terminal personnel 10 minutes notice prior to requesting that the loading rate be reduced, and the same notification prior to the completion of loading. As previously stated, the pumps can be stopped from the loading platform in case of an emergency.

The approximate distance from the mainland naphtha storage tanks to the loading platform is 5.4 kms. (3.35 miles).

Regulations:

1. Sufficient number of crew members are to be on duty at all times to properly tend the mooring lines and ensure that the position of the vessel is maintained alongside of the dolphins.
2. Except in the case of an emergency, the deck officer on duty shall give the terminal personnel at least 10 minutes notice prior to changing the loading rate of the naphtha, and at least 10 minutes notice prior to the completion of loading cargo.
3. Under no circumstances is the vessel's main propulsion engine to be disabled, or are any repairs to be undertaken while the vessel is moored to the marine terminal.
4. The vessel's fire-fighting equipment is to be kept ready for immediate use. A sufficient number of hoses shall be led out forward and aft to provide full deck coverage.
5. Lights must be provided by the vessel to illuminate the water area in the vicinity of the bow, stern and off-shore side.
6. Smoking will be permitted in such *Interior* spaces as may be designated by the vessel's Master. However, smoking will not be permitted on any open deck areas.
7. The loading of ship's stores and supplies will not be permitted during the time ballast is being discharged, or naphtha is being received by the vessel.
8. Ullage hole screens are to be used at all times while bulk oil transfer operations are in progress.
9. Galley ranges, unless electric, are not to be used while the vessel is loading naphtha.
10. Except for the period of time actually required for passengers to embark or disembark from a launch, no boats, launches or vessels will be permitted to moor alongside a vessel which is berthed at the marine terminal.
11. Safety practices which are common to marine terminals on a world-wide basis will apply.

Honam Buoys: Lat. 37° 29′ 00″ N. and Long. 126° 36′ 03″ E., draft acceptable 30 ft., at East side of A-3 anchorage. This berth is the private facility of the Honam Oil Refinery Co. (joint company with Caltex) for discharge of their own petroleum products. Consisting of 4 mooring Buoys and sub-marine pipe-lines.

Union Oil Terminal, 42 ft. depth alongside. Berthing/unberthing in daytime slack water only.

MEDICAL: Launch is provided in emergency call to evacuate sick men. Modernised hospital is available. Provincial and Christian hospital.

STEVEDORES: There are 12 stevedoring companies with:
162 wooden barges (16,200 tons) – total capacity 34,200 tons.
60 steel barges (18,000 tons) – total capacity 34,200 tons.

DENSITY: Varies between 1022 and 1024.

FRESH WATER: Can be supplied by lighter, max. quantity 250 tons in 10 hrs. Earliest advance notice essential.

FUEL: Available by barge only.

CUSTOMS ALLOWANCES: One carton cigarettes or 1 lb. of tobacco, and 1 bottle wine or spirits allowed, each man.

IDENTIFICATION CARDS: Crew required to carry valid identification cards at all times.

REPATRIATION: Facilities for crew changes or repatriation.

GANGWAY/DECK WATCHMEN: Ship security guard is required. Stream charge 30% additional.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CONSULS: None.

REPAIRS: Deck and engine repairs possible. Floating cranes up to 60 tons capacity.

AIRPORT: 20 miles from port. Regular flights to Japan.

POLICE/FIRE/AMBULANCE: Police Officer (2) 0568; Fire Depot (2) 119; Medical Centre (2) 2535.

TELEPHONES: Portable communication facility is available.

TIME: Korean Standard Time. 9 hours ahead of GMT. No alterations during year.

HOLIDAYS: 1st January, 1st March,, 5th April, 6th June, 17th July, 15th August, 3rd October, 9th October, 24th October, 25th December.

GENERAL: Tide condition is critical, swift currents (high tide: 9 to 10 m.) special attention is required.

ACCOMMODATION LADDER: Essential for Port Officials on entry. Also for tanker berth no access allowed through plant. Rig on port side.

SHORE LEAVE: Launch service required, also local curfew ashore 2400 to 0400 hrs., on launches and craft 1900 to 0600 hrs.

DELAYS: Can be caused by bad weather.

SHIPMASTERS REPORT: 1974

Approaches: Inchon, the port for Seoul, the capital of South Korea, is situated in Lat. 37° 28′ 20″ N., Long. 126° 37′ 09″ E., and is approached from the South through the Yellow Sea. From Kyoknyolbi Do (Clifford Is.) LH. a course should be set to pass 1 mile North of An Do LH., in the vicinity of which the pilot boat will be waiting. Pilotage is not compulsory from this point but is recommended and the Pilot should be ordered at least 48 hours before arrival through the Agent, in Inchon.

From An Do vessels proceed via the Dong Soodo (East Channel) which is very winding and narrow in places. All lighthouses on this part of the Korean coast appear to show lights of very low power, the range of visibility appears to be about one quarter of that shown on charts and in the Admiralty Light List.

Pilotage is about 38 miles to the Inchon anchorage for deep-sea vessels, about three hours steaming. The Pilot was good even in thick fog, and all Pilots seem to speak reasonable English. The Pilot launch is fitted with VHF.

The anchorage is extensive, with room for about 30 ocean-going vessels, holding ground is good and no trouble was experienced in currents of 5 knots, although even stronger currents are experienced at Spring tides.

The port: Can be divided into three sections according to location and function; the inner dock, outer harbour and Northern shoreline.

The Inner Harbour basin is presently operated for the accommodation of cargo ships up to 50,000 d.w.t. The outer harbour, of new construction, is largely for coastal and fishing vessels of less than 500 tons, and is located just outside and to the S.W. of the inner basin.

The Northern shoreline, North of the closed basin has unloading facilities at many private plants. These are lighter berths.

With the completion, in May 1974, of the new lock system and second tidal basin, the berthing facilities in the port have changed the cargo handling capacity from 1,420,000 tons to 6,270,000 tons per year by providing 3,820 m. length of quay and container berths.

Within the inner harbour is the first tidal basin (the older lock system dating from 1923). This basin is accessible through the new lock system.

Lock Particulars:

	For 50,000 d.w.t. vessels	*For 10,000 d.w.t. vessels*
Lock chamber	1 base	1 base
Total length	381.0 m.	288.25 m.
Usable length to Inner gate	280.0 m.	183.00 m.
Outer gate	310.0 m.	208.00 m.
Width	36.0 m.	22.50 m.
Height from sill	18.5 m. from sill	18.50 m. from sill
Height	19.0 m. from bottom	19.00 m. from bottom
Number of gates	3 sets	3 sets
Length of gates	38.0 m.	24.50 m
Width of gates	8.3 m.	6.40 m.
Height of gate	18.5 m.	18.50 m.
Weight per gate	1,050 tons	590 tons
Time required for opening–closing	5 min.	3 min.

The Inner Harbour has berths for 27 vessels as summarised below:

Pier	*Length* (m.)	*Berthing capacity* d.w.t. (vessels)	*Cargo type*
Pier No. 1	454	4,500 (3)	Dry cargo
Pier No. 2	1,425	2,000 (4)	Dry cargo and bulk cargo
		20,000 (1)	" " " "
		8,000 (5)	" " " "
Pier No. 3	1,250	8,000 (4)	Steel products
		10,000 (2)	" "
		20,000 (1)	Heavy cargo
Pier No. 4	1,160	10,000 (1)	Dry cargo and containers
		20,000 (1)	" " " "
		30,000 (1)	" " " "
		40,000 (1)	" " " "
		50,000 (1)	" " " "
Pier No. 7	786	50,000 (2)	Bulk grain

Equipment in use (August 1974): Tug boats, 2 of 2,000 h.p.; 3 of 3,600 h.p.; Floating cranes, 1 of 75 tons capacity; 1 of 30 tons capacity; Container crane, 1 of 30 tons capacity. Bulk Grain: Pier 7 elevator with conveyor facilities; capacity 800 t.p.h.

Additional equipment planned: Tug boats, 4 of 7,000 h.p. Floating cranes, 1 of 100 tons capacity; 1 of 70 tons capacity. Container cranes, 4 of 35 tons capacity.

Further expansion is planned for the Northern side of the inner harbour. When completed there will be an additional 800 m. of quay at Pier 6 and 780 m. at Pier 8. This will add a total of 10 new berths for vessels from 5,000 to 50,000 d.w.t.

The Port of Inchon is administrated, managed and operated by the Government, represented by the Inchon District Marine Bureau (IDMB) in the Ministry of Transportation.

Decisions on administration and operation of the port, particularly to daily activities, are made by the Director, District Marine Bureau of the above Ministry.

Port activities, such as cargo in transit sheds, or in storage and port facilities of Government property, are in the custody of the Association of Port Management. This Association is formed from members of the various port users associations and was formed in 1972, under the control of the Minister in charge of Port Operations.

Port service companies and Stevedoring companies are still privately owned.

Repatriation and relief of crew members was made without any apparent difficulty. Flights to and from the U.K. being routed through Tokyo.

SHIPMASTERS REPORT: 1975:

The Ando pilot vessel is equipped with VHF Channel 16. If berthing in the tidal basin it is necessary to use vessel's sewage tank or sanitary tanks provided from ashore. Immigration require 2 copies of crew list forwarded before arrival to Agents, also require ports of call list for previous 3 months. If any crew member is caught smuggling in South Korean ports the vessel is liable to be detained indefinitely.

AUTHORITY: Inchon Marine Bureau.

KUNSAN (including Changhang): 35.55 N. 126.45 E.

The Port of Kunsan is situated on the Southern mouth of the Kum River which flows into the Yellow Sea, and North Changhang.

DOCUMENTS:

6 copies Report (Ent/Departure).
6 copies Crew List.
6 copies Passenger List.
2 copies Crew Personal Effects List.
3 copies Passenger Luggage List.
2 copies Store List.
9 copies Manifest (Dis./Loading) only.

NOTICES: All vessels bound for Korean ports should give an ETA to the local Agents 27 hours prior arrival. This is essential to enable the Agents to notify the Port Authorities and arrange Pilot if necessary.

RESTRICTIONS: Vessels should enter during daylight hours only. Many small Korean fishing and cargo boats in this area display dim navigation lights or none at all at night. Pilot is not compulsory but all vessels calling at this port recommended employ a Pilot in view of the hazardous channel and tidal difficulties. Controlling depth 8 ft. at Bar. Keel clearance of 2 ft. required.

PILOTAGE: The Pilot station is situated at the Southern side of Piun Do (Hiyo To) Island the correct position of which is at 35° 56′ N. and 126° 27′ E.

The boarding point near Piun Do is about 14 miles from Kunsan. Pilot to be ordered at least 24 hours in advance. Pilots cannot board in rough weather. Due to constantly changing bottom conditions, vessel should not attempt to enter without Pilot.

ANCHORAGE: Outer anchorage about 5.5. miles West of Kunsan for vessels drawing up to 28 ft.

Inner anchorage off Kunsan suitable for vessels of 21 ft. draft.

RADIO: Kunsan Radio, call sign HLN operating on 500 and 484 kHz.

MAX. SIZE: Draft 18 ft. to 27 ft. dependent on height of tide.

TUGS: 5 tugs with respective capacity of 300 h.p. (1) 150 h.p. (2) and 80 h.p. (2) are available. 1 floating crane with capacity of 30 tons owned and managed by the Korea Dredging Corp. is available.

BERTHING: The port is controlled by Kunsan District Marine Bureau and all vessels come under jurisdiction of Kunsan Custom House. The anchorages in stream inner harbour can accommodate 1 or 2 vessels less than 1,000 gross tons, and outer anchorage (Yubudo Anchorage) accommodates 1 ocean going vessel drawing about 28 ft. There are 5 pontoon piers (3 for Kunsan and 2 for Changhang) each of which can accommodate an ocean-going vessel with maximum draft of 27 ft.

STEVEDORES: There is 1 stevedoring company with 14 wooden barges, 3 steel barges and 3 tug boats. Discharging capacities: average records per day of 24 hours: coal 1,500 tons; grain and wheat 1,600 tons; fertilizer 1,300–1,400 tons; cement 1,000–1,100 tons; lauan log 500,000 B/F. Daytime only.

MEDICAL: Crew members should be in possession of health certificate showing vaccinations for smallpox and typhoid. In case health certificate has expired, the person(s) will be vaccinated/inoculated by a quarantine doctor.

CURFEW: In Korea the curfew is still effective from 2400 to 0400 hrs. every day.

TIME: Korean Standard Time, GMT plus 9 hours.

HOLIDAYS: Public Holidays – New Year (January 1-3); Independence Movement Day (March 1); Labour Day (March 10); Arbor Day (April 5); Memorial Day (June 6); Constitution Day (July 17); Liberation Day (August 15); Nation's Foundation Day (October 3); National Alphabet Day (October 9); United Nations Day (October 24); Christmas Day (December 25). (Can be worked if requested.)

Local Holidays. Work cannot be carried out on Lunar New Year's Day and the Moon Festival, about 15th August.

SHORE LEAVE: Crew shore passes will be issued by Port Immigration Office.

AUTHORITY: Kunsan Maritime Bureau.

MASAN: 35.11 N. 128.33 E.

DOCUMENTS:

6 copies Report (Ent/Departure).
6 copies Crew List.
6 copies Passenger List.
2 copies Crew Personal Effects List.
2 copies Store List.
9 copies Manifest (Dis./Loading only).

PILOTAGE: Not compulsory, but inadvisable to enter without Pilot. Pilots available at Pusan, to be ordered by Agent at least 24 hours in advance. Pilot station at Kaduk Do. A berthing/unberthing pilot available at Masan.
NOTICES: All vessels bound for Korean ports should give ETA to the local Agents 27 hours prior arrival. This is essential to enable the Agents to notify the Port Authorities and arrange a Pilot if necessary.
MAX. SIZE: The maximum draft admissible for entrance is 26 ft.
TUGS: 1 tug boat of 1,000 h.p., owned and managed by Masan District Marine Bureau available. Also 6 private tugs.
ANCHORAGE: Mooring capacity at anchorages: A-1, A-2, A-3 Depth 30 ft.; A-4, A-5, A-6 Depth 24 ft.; A-7, A-8 depth 23 ft. Quarantine Station A Depth 36 ft.
BERTHING:

	Depth (m)	*Length (m)*	*Max. Size*	*No. of Berths*
Pier No. 1	8.0	445	8,000	2
Pier No. 2	5.0	385	500	2
Pier No. 3	11.0	210	20,000	1
	11.0	210	20,000	1*
Pier No. 4	11.0	240	20,000	1*
Electric Power Plant Pier	6.5	115	3,000	1
Central Lighters Wharf	1–2	1,022	—	—

*Under construction.
STEVEDORES: Korea Express Co., 8 barges (1,000 tons), 1 tug (145 h.p.); Hyopshin Stev. Co., 6 barges (1,000 tons), 1 tug (180 h.p.).
Discharging capacity – average records per day (24 hours).

Coal	in bulk	1,000 tons
Cement	in bags	1,000 tons
Grain & Wheat	in bulk	1,000 tons
Fertiliser	in bags	1,000 tons
Steel Scrap	in bulk	750 tons

MEDICAL: Crew members should be in possession of health certificate showing vaccinations for smallpox and typhoid. If the health certificate has expired, the person(s) will be vaccinated/inoculated by a quarantine doctor.
CURFEW: In Korea the curfew is still effective from 2400 to 0400 hrs. every day.
TIME: Korean Standard Time. GMT plus 9 hours.
HOLIDAYS: Public Holidays:
New Year (January 1–3); Independence Movement Day (March 1); Labour Day (March 10); Arbor Day (April 5); Memorial Day (June 6); Constitution Day (July 17); Liberation Day (August 15); Nation's Foundation Day (October 3); National Alphabet Day (October 9); United Nations' Day (October 24); Christmas Day (December 25).
SHORE LEAVE: Crew shore passes will be issued by Port Immigration Office. Extension of shore passes should be made every 72 hours.
AUTHORITY: This port is controlled by Masan District Marine Bureau, under jurisdiction of Masan Custom House.

MOKPO: 34.37 N. 126.23 E.

DOCUMENTS:

- 6 copies Report (Ent./Departure).
- 6 copies Crew List.
- 6 copies Passenger List.
- 2 copies Crew Personal Effects List.
- 3 copies Passenger Luggage List.
- 2 copies Stores List.
- 9 copies Manifest (Dis./Loading only).

PILOTAGE: Pilots stationed at Kasado Island, 34° 27′ N. 125° 02′ E. 30 miles from Mokpo. 24 hours notice to Agent required to arrange Pilot. Although not compulsory, vessels strongly recommended not to enter without Pilot.
NOTICES: All vessels bound for Korean ports should give an ETA to the local Agents 27 hours prior to arrival. This is essential to enable the Agents to notify the Port Authorities and arrange a Pilot if necessary.
RESTRICTIONS: Mokpo is located at the South-Western end of the Korean peninsula. The port is at the mouth of the Yungsan River which flows through the Yungsan peninsula. Kasako Island protects this port from heavy winds and swell. The Yungsan River provides 5 anchorages where 5 vessels of Liberty type can berth at a time. The port is 30 miles from the pilot station off Ksasdo Island, in position 34° 27′ 20″ N. and 125° 02′ 05″ E.

Tide Information: max. tide level at high water 4.5 m.; min. tide level at high water 2.8 m.; average tide level at high water 3.5; Max. tide level at low water 0.5 m.; Min. tide level at low water 1.3 m.; Average tide level at low water 0.7 m.
ANCHORAGE: Five anchorages in depths from 11 m. to 20 m. Anchorage Nos. 2, 3, and 4 are better than No. 1 and 5 for discharging cargo because No. 1 is sometimes very dangerous due to strong tidal currents.
TUGS: Three tugs available, up to 150 h.p.
RADIO: Mokpo Radio. Call sign HLM operating on 500 and 484 kc/s.
BERTHING: Sam Hak Do Pier, length 168 m. and width 18 m., where only one 8,000 ton ocean-going vessel can operate in 13 m. depth.
STEVEDORES: There are 3 stevedores companies with 28 wooden barges (1,680 tons), 7 steel barges (1,200 tons) and 3 tug-boats.
MEDICAL: Crew members should be in possession of Health Certificate showing vaccinations for smallpox and typhoid. In case the Health Certificate has expired, the person(s) will be vaccinated/inoculated by a quarantine doctor.
FRESH WATER: Available at rate of 150 tons per day. 24 hrs. notice required.
CURFEW: In Korea, the curfew is still effective from 2400 to 0400 hrs. every day.
TIME: Korean Standard Time, GMT plus 9 hrs.
HOLIDAYS: Public Holidays; New Year (January 1st-3rd); Independence Movement Day (March 1st); Labour Day (March 10th); Arbor Day (April 5th); Memorial Day (June 6th); Constitution Day (July 17th); Liberation Day (August 15th); Nation's Foundation Day (October 3rd); National Alphabet Day (October 9th); United Nations Day (October 24th); Christmas (December 25th). Work can be arranged on all above holidays. Local Holidays; No work can be done on Lunar New Year or on the Moon Festival about August 15th.
SHORE LEAVE: Crew shore passes will be issued by Port Immigration Office. Extension of shore passes should be made every 72 hrs.
AUTHORITY: Mokpo District Marine Bureau.

MUKHO: 37.33 N. 129.07 E. (See Plan Book)

PORT LIMITS: The port limit is established by lines joining the following points:

A.	37° 33′ 12″ N.	129° 07′ 25″ E.
B.	37° 33′ 12″ N.	129° 08′ 12″ E.
C.	37° 32′ 00″ N.	129° 08′ 23″ E.
D.	37° 32′ 00″ N.	129° 07′ 02″ E.

DOCUMENTS:

- 6 Crew Lists.
- 6 Passenger Lists (In case of any passenger aboard)
- 3 Store Lists
- 3 Personal Effect Lists
- 3 Cargo Manifests (In case of any cargo on board)
- 2 Port Itinerary Reports (For the last 6 months)

PILOTAGE: Compulsory and 3 licensed Pilots are available from 0500 hrs. to 2200 hrs., and usually join ship in position Lat. 37° 32′ 30″ N., Long. 129° 08′ 25″ E.

VHF Radio is available for contacting pilot station.
ANCHORAGE: Outer Harbour offers anchorages for the vessel awaiting docking order with a rocky and sandy bottom.

Vessels lying anchored in this anchorage which is open roads, are recommended to pay attention to weather conditions. The depths vary from 9 m. to 26 m.
RESTRICTIONS: Pilot for entering inner harbour is available from 0500 hrs. to 2200 hrs. due to close of port and curfew.

The max. available depth of inner harbour is 8.5 m. or 28 ft. The max. tidal range is 0.4 m.
MAX. SIZE: The max. permissible length, breadth and draft for entering inner harbour is as follows:

Length – 180 m. Breadth – 25 m. Draft – 8.5 m.
HEALTH: Pratique is automatic. For pratique it is necessary to prepare the following documents: Yellow cards. Deratting certificate and/or Deratting Exemption Certificate. In the event of any suspected disease or fever on board it should be reported without delay to Quarantine Station and/or Agent in Mukho.
RADIO: Shore Radio Stations: Seoul Radio, Kangreung Radio, Busan Radio and Mokpo Radio.

Mukho harbour Network 6MF2.
VHF: Call sign "Mukhoradio" Channel 16 for calling station. Channel 26 for communication.
RADAR: None.
TUGS: 2 tugs of 1,000 h.p. each equipped with their own towline are available.
BERTHING: *No. 1 Pier.* (Exclusively for loading Coal/Graphite in bulk).

Berth A: Exclusively for loading Coal/Graphite in bulk. Length 100 m. Available draft at LW 7.5 m. 2 lines of belt conveyor and 2 loaders, height above HWL. 7 m. Loading rate per loader per hour 300 metric tons.

Berth B: Exclusively for loading Coal/Graphite in bulk. Length 110 m. Permissible draft at LW 8 m. 2 lines of belt conveyor and 2 loaders, height above HWL. 7 m. Loading rate per hour per loader 400 metric tons.
No. 2 Pier: Exclusively utilized for Naval and Coast Guard ships. Length 140 m. Depth available 4 m.
No. 3 Pier: For loading bulk cement, bagged cement and cement clinker in bulk, and loading/unloading general cargoes. Length 330 m. Available draft at LW 8.5 m. or 28 ft. 1 line of conveyor and 1 loader (air slider) for loading bulk cement. 2 lines of belt conveyor and 2 loaders for loading bagged cement. 1 line of belt conveyor and 1 loader for loading cement clinker in bulk. Available height above HWL 8 m. Loading Rate: Bulk cement 400 metric tons per hour. Bagged cement 1,500 metric tons per day per loader. Cement clinker 350 metric tons per hour.
Loading rate for General Cargo as follows:
Average discharging rate per hour/gang:

Steel material	Various	30 Metric tons
Machinery	Case	30 tons
Grain	Bulk	25 metric tons
Gypsum	Bulk	25 metric tons
Coke	Bulk	15 metric tons
Fertilizer	Bag	20 metric tons

Average Loading Rate per hour/gang:

Iron Ore	Bulk	20 metric tons

No. 4 Pier: For loading bulk cement and loading/unloading general cargoes. Length 150 m. Permissible draft at LW 7.5 m. 1 line of belt conveyor and 1 loader (air sliding chute) for loading bulk cement. Height above HWL 8 m. Loading Rate: Bulk Cement 400 metric tons per hour. Loading rate of general cargoes same as at No. 3 Pier. Discharging rate of general cargoes same as at No. 3 Pier.

Central Pier: For loading/unloading general cargoes. Length 120 m. Permissible depth at LW 6.5 m. No shore facilities. Loading/unloading general cargoes same as at No. 3 Pier.

CRANES: Mobile Cranes 1×20 ton and 1×30 ton.

BULK CARGO FACILITIES: No discharging facilities. Loading facilities see "Berthing".

STEVEDORES: Vessels bound for this port are to radio Agent Shipper/Consignee and Harbour Master, at least 24 hours prior to arrival, draft on arrival, description/quantity of cargo.

Average Discharge Rate per gang/hour:

Steel materials	Various Types	30 tons
Machinery	Case	30 tons
Grain	Bulk	25 tons
Ores	Bulk	25 tons
Fertilizer	Bag	20 tons

Average Loading Rate per gang/hour:
(Only with labourer hands – manually)

Ores	Bulk	20 tons

Average Loading Rate per gang/hour:
(By shore loading facilities)

Coal/Graphite	Bulk	350 tons
Cement	Bulk	350 tons
Cement	Bag	60 tons
Cement Clinker	Bulk	350 tons

MEDICAL: Several hospitals available.

TANKERS: No facilities.

DENSITY: Average salinity of water in the port is 1.025.

FRESH WATER: Supply of fresh water available by water barge and from shore water works.

Supply at pier	50 t.p.h.
Supply by barge	100 tons per day

FUEL: Most grades of domestic and bonded oil available with 4 days prior notice.

FIRE PRECAUTIONS: None.

CONSULS: None.

REPAIRS: None.

DRY DOCKS: None.

SURVEYORS: Classification surveyors are in Seoul and/or Busan.

GANGWAY/DECK WATCHMAN: Owners/Master's option.

HATCHES: First Opening/Final Closing by crew and intermediate handling by stevedores.

CUSTOMS ALLOWANCE: Cigarettes: 1 carton. Wine /Spirit: 2 bottles.

CARGO GEAR: Shore loading facilities see "Berthing". No heavy lift cranes.

REPATRIATION: Possible.

AIRPORT: No airport locally, however there is an express bus service between Mukho and Seoul.

TIME: GMT plus 9 hours.

HOLIDAYS: *Official Holidays are as follows:*

The New Year Day	1st January	Work cannot be arranged
Independence Movement Day	1st March	Can be arranged
Memorial Day	6th June	Can be arranged
Constitution Day	17th July	Can be arranged
Independence Day	15th August	Can be arranged
National Foundation Day	3rd October	Can be arranged
Hangul (Korean Alphabet) Day	9th October	Can be arranged
Armed Forces Day	1st October	Can be arranged

Festival Days:

Lunar Calendar New Year	1st January (Lunar)	Work not possible
Labour Day	10th March	Work possible
Children's Day	5th May	Work possible
Buddha's Birthday	8th April (Lunar)	Work possible
Moon Festival Day	15th August (Lunar)	Work not possible
Christmas Day	25th December	Work possible

POLICE/AMBULANCE/FIRE: Police – 3112. Ambulance – 3900. Fire – 119, 3005.

TELEPHONES: None.

SERVICES: None. Should be arranged from Busan/Inchon.

SHORE LEAVE: Possible, curfew in effect from 2400 hrs. until 0400 hrs.

IDENTIFICATION CARDS: Shore passes are issued for every Crew member who wishes to go ashore.

REGULATIONS: No particular regulations.

DELAYS: Normal delays.

DEVELOPMENTS: The Port of Bukpyong, 3 miles Southward of Mukho, is under construction and will be completed in mid-1979, and will be able to accommodate as follows:

After 1st stage construction in 1979:

2× 5,000 d.w.t.	2× 8,000 d.w.t.
1×10,000 d.w.t.	4×20,000 d.w.t.

After completion of 2nd stage construction in 1981:

12× 5,000 d.w.t.	2× 8,000 d.w.t.
4×10,000 d.w.t.	4×20,000 d.w.t.
1×50,000 d.w.t.	

GENERAL: None.

AUTHORITY: Mukho District Maritime & Port Authority.

POHANG: 36.01 N. 129.24 E. (See Plan Book)

PORT LIMITS: The sea within the line joining the position of Yeonam Southern Cape 129° 25′ E. to that of 35° 59′ 50″ N. 129° 27′ 30″ E.

DOCUMENTS: See "Busan".

PILOTAGE: Compulsory, 4 licensed pilots available.

ANCHORAGE: 4 anchorages in depth 12 m. – 22 m. With muddy and sandy bottom.

MAX. SIZE: The first pier depth 16 m. Length 930 m. Max. d.w.t. 100,000.

The second pier depth 5.5 m. – 12 m. Length 840 m. Max. d.w.t. 50,000.

The third pier depth 5.5 m. – 9.5 m. Length 440 m. Max. d.w.t. 5,000.

The fourth pier depth 11 m. – 12 m. Length 420 m. Max. d.w.t. 30,000.

The fifth pier depth 7.5 m. – 11 m. Length 695 m. Max. d.w.t. 50,000.

The sixth pier depth 5.5 m. Length 220 m. Max. d.w.t. 2,000.

HEALTH: Certificates required.

TUGS: 3 tugs available of 3,000 h.p. The tugs are stationed at the third pier.

BERTHING: Quay height above sea level: 3 m. at high tide and 2.8 m. at low tide. Total quay length 3,575 m.

REPATRIATION: All facilities available for crew changes.

CRANES: 12 Shore cranes. (Lifting capacities 3,138 t.p.h.)

CUSTOMS ALLOWANCE: Tobacco: 400 cigarettes. Wine: 1,500 cc.

HOLIDAYS: New Year's Day – 3rd January, 1st March, 5th April, 5th May, Buddha's Birthday, 6th June, 17th July, 15th August, 3rd October, 9th October, Christmas Day.

POLICE/AMBULANCE/FIRE: Police 2-3419. Fire 119. Ambulance 2-5269.

FRESH WATER: Can be supplied alongside the quay or by water barge.

SHORE LEAVE: Crew members allowed ashore.

IDENTIFICATION: Seaman's book is sufficient.

AIRPORT: Kimpo 200 km. Kimhae 150 km.

FUEL: All grades obtainable from oil companies.

SERVICES: Sub-agents. Ship's laundries, etc.

MEDICAL: 2 hospitals available.

SHIPMASTER'S REPORT: 1975.

Pilot: Usually boards the vessel after anchoring in position 36.03 N., 129.26 E.

Anchorage Position for Quarantine Clearance: Same as for Pilot.

Berthing; Entry and departure are only permissible during daylight hours, vessels are not allowed to berth at night.

Fresh Water; Available at all times ex-wharf without limit on quantity taken.

SHIPMASTER'S REPORT: 1975.

Approaches: There are no British Admiralty Charts covering this port. The coastal approach to Yongil Man can be made on Chart BA 3666, thereafter an American Chart No. 95166 (formerly HO 3257) is suitable for making the approach to the quarantine anchorage.

There are no offlying dangers, and depths shelve gradually from the entrance to the head of the bay.

A good lookout should be maintained for fishing nets which are very profuse.

Quarantine: Port Health officials board at the quarantine anchorage – Position 36° 02′ N., 129° 26′ E., in a depth of 19 m. No radio pratique available.

If vessel arrives at night, officials board at daybreak next morning. No port movements during the hours of darkness.

Notice of Readiness: Accepted at time of free pratique granted.

Pilotage: Pilot boards with port health at anchorage. Pilot stated that our vessel 72,072 d.w.t. was too big for the port, which was designed for max. size 50,000 d.w.t. However, no difficulties experienced, berthing in calm weather conditions. Berthing and sailing in daylight hours only.

Entrance Channel: Entrance to harbour is made via dredged channel, commencing between two buoys, (No. 1 & 2), about 200 ft. apart, situated about 1 mile off Southern breakwater head.

Axis of approach channel, from midway between the buoys to midway between the breakwater heads, is a straight line 259° True.

Dredged depth in the channel is stated to be not less than 13 m. However, according to the echo sounder, depth beneath keel was never less than 11 ft. until vessel entered the harbour basin, when further depth recording was impossible due to 'noise' from propeller wash caused by astern movements, obscuring echo sounder signal propagation. As the vessel's draft was 36 ft. 08 in. min. depth of water was therefore 47 ft. 08 in. = 14.5 m. approx. This was verified on the outward passage. The 13 m. min. probably refers to the basin within the harbour entrance.

Tide: The rise and fall of tide is only about 1 ft.

Tugs: There are only 2 tugs available, both very weak. Pilot kept complaining that the tugs were inadequate for a vessel of this size, which was a fair assessment.

Berth: See sketch (Plan) for depth alongside POSCO mineral quay. Min. depth at berth stated to be 12 m. = 39 ft. 04.5 in. Max. permissible draft 11.2 m. = 36 ft. 09 in. Density was 1026.

Loaded vessels berth head in, starboard side alongside. Can prepare accommodation ladder starboard side before arrival.

The face of the quay is protected by permanent heavy-duty rubber fendering.

Moorings: A min. of 3 headlines, 1 breastline, and 2 backsprings, each end, is recommended. Although the port is well sheltered from the prevailing W. – N.W. winds, it is wide open to the N.E. from which strong gales can suddenly develop.

Discharge: 2 modern transporter grabs discharge into a conveyor belt system. Discharge rate overall about 1,100 t.p.h., on a 24 hour basis. Holds were well swept clean on completion.

A meticulous draft survey was held upon arrival and after completion, to verify Bill of Lading.

Fresh Water: Plentiful supply from pipe line on the quay. Apply to Agent for services of waterman.

Customs: The bond is not sealed, but a Custom's Officer is stationed on board at the gangway throughout.

Curfew: A curfew is in operation in South Korea, from 2400 hrs. to 0400 hrs.

Shore Leave: The crew are not allowed to pass through the steelworks, going ashore. A liberty boat must be hired, which plies between the end of the quay and Pohang town pier, about a half hour run.

Last boat returning to ship at night leaves the town at 2200 hrs. First boat in the morning leaves at 0600 hrs. Shore passes issued on arrival.

Documents: The following arrival papers are required:—

Quarantine Declaration and Vaccination List.
14 Crew Lists.
3 Stores Lists.
3 Crew's Effects Declarations.
10 Cargo Manifests in Metric Tons.

N.B. The cargo manifests can be made up on board by typing on plain paper, but quantities must be stated in *metric tons.*

Agent: Pohang Shipping Agency Co. (Teladdress "Pohangship Pohang"), are sub-agents for Young Jin Shipping Co. Ltd; Seoul, (Teladdress "Three Young Seoul"). The Agent was very helpful and attentive.

Repatriation: Possible. A complete Chinese crew change (25 men) was carried out during vessel's stay, plus one officer to the U.K.

Communications: There is no Telex system in Pohang. Cables are passed by telephone to General Agents in Seoul, for onward transmission. There is no problem arranging telephone communication with the U.K., but it is not possible to reverse the charges. (call collect). Average waiting time about 1 hour.

Repair Facilities: Most engine and hull repairs can be carried out. There are 4 repair firms available, but it is advisable to take the Agent's advice as 3 of these firms are very small, with limited manpower. Materials not immediately available, can be brought by road from Pusan, about 3 hours journey. Lloyd's Hull & Engine Surveyors based in Pusan.

Future Port Developments: Work is at present in progress on the construction of a new bulk-handling facility, seaward of the present installation. The approach channel to the new facility will have a min. depth of 16 m., and the berths will be capable of taking vessels of up to 100,000 d.w.t., at drafts of up to 14 m. Scheduled for completion in 1977.

SHIPMASTER'S REPORT: 1975.

Port Limits: By a line drawn from 36° 04′ 10″ N., 129° 25′ E., to 35° 59′ 50″ N., 129° 27′ 30″ E., Korean Chart No. 135 Pohang Harbour and Approaches refers.

Documents: See "Pusan" (Busan).

Pilotage: Pilots board either at the Quarantine anchorage or off the channel entrance as required. Pilotage within the harbour breakwaters is compulsory. No VHF available but Pilots are equipped with transceivers for port operations.

Anchorages: In roadstead, open to the N.E. in depths of 15 to 20 m. – Numerous mooring buoys and marker buoys for reclamation are in the vicinity. Vessels should anchor to seaward until a Pilot boards.

Restrictions: Vessels may arrive and sail from the roadstead at any time, but in daylight only if using the inner harbour.

Max. Size: No restriction in the roadstead, 12 m. in the inner harbour.

Pratique: It is advisable to give advance notice of pratique. Pratique is granted to vessels anchored in a circular quarantine anchorage, radius 500 m., the centre of which is located in 36° 03′ 20″ N., 129° 25′ 25″ E.

Radio: All messages to Pohang should be routed through Busan Radio HLP.

Tugs: A number of tugs are available, the 2 largest being 2,500 h.p. each. Tugs join the vessel at the breakwater entrance.

Approaches: Vessels using B.A. Chart 3666 should find flashing seabuoy in the entrance to Yon Iru Bay located in position 36° 05′ 50″ N., 129° 30′ 35″ E., and from there steer a course 227° True (6.8 miles) to the inner harbour fairway entrance, which is marked by two buoys marked 1 and 2 and QK FL. G. and FL. R. 3 seconds, respectively each visible 5 miles. An anchorage should be found close seaward of the entrance buoys whilst awaiting a Pilot.

Berthing: A number of inner harbour berths are available at depths ranging between 8 and 12 m. datum.

The entrance fairway has a min. depth of 12.4 m. Harbour developments are still in progress.

Stevedores: Arranged through Agents. Advance notice desirable.

Medical: Available.

Fresh Water: Limited quantities available by barge, if advance notice given.

Fuel: None.

Consuls: None.

Repairs: Only repairs of a minor nature can be undertaken.

Drydock: None.

Surveyors: Lloyds available from Busan.

Gangway/Deck Watchmen: Not required.

Opening/Closing Hatch: By Crew.

Customs Allowance: See "Busan".

Repatriation: Not available.

Airport: Busan (Suyeng).

Shore Leave: Permitted, but even if vessel berthed alongside, launch service must be used.

Identification: Shore Passes.

Curfew: 2400–0400 hrs.

Developments: Considerable reclamation and harbour developments in progress.

General: Last call of vessel was July 1975. B.A. Chart No. 3666 does not show the new port of Pohang at all but can be used for approach work. Korean Chart No. 135 should be obtained if possible.

AUTHORITY: Pohang District Maritime and Port Authority.

PUSAN: 35.07 N. 129.02 E.

DOCUMENTS:

9 Cargo Manifests.
3 Transit Cargo Manifests.
8 Crew Lists.
8 Passenger Lists.
4 Passenger Baggage Lists.
4 Mail Lists (forms supplied by Agent).
5 Parcels Lists (forms supplied by Agent).
2 Arms-Narcotics Lists.
2 Tobacco Lists.
2 Currency Lists.
4 Stores Lists.
4 Crew Personal Effects Lists.

Immigration: All Seamen's Books examined and shore passes made out. These passes to be carried at all times when ashore. Strict curfew from 0000 hrs. to 0400 hrs.

CERTIFICATES:

Derat. Certificate or Exemption.

Inoculation and Vaccination Certificates for all crew members.

PILOTAGE: Professional Pilot service is available at Pusan and contact can be made by telephone No. 6-1346 or 6-1743. Necessary for arriving vessel to notify Pilots of arrival 24 hrs. in advance. VHF unavailable. Formal address is: 73 2-Ka, Choong-Gu Taigyo-Ro, Pusan, Korea. Blast signal from vessel used to call Pilots. Pilot station position 35° 05′ 5″ N. 129° 05′ E.

Pilotage is compulsory and available day and night. Pilot boards off the entrance to the outer harbour. Pilot boat is white launch with pilot signals. Tugs cannot be employed unless Pilot is on board.

HEALTH: Pratique granted to vessels anchored in a circular quarantine anchorage located in outer harbour. Quarantine inspection can be arranged by day or night if sufficient advance notice given although regular hours are sunrise to sunset. Valid smallpox and cholera certificates required. Inoculations against typhoid and typhus may be required depending on prevalent conditions.

ANCHORAGES:

Designation	*Depth*	*Capacity*
S-anchorage	8-9 m.	6 vessels of 300-2,000 t.
E-anchorage	11-12 m.	6 vessels of 8,000-12,000 t.
N-anchorage	7-10 m.	18 vessels of 500-6,000 t.

RESTRICTIONS: Vessel having called at Communist ports within 6 months of contemplated entry of Pusan needs to obtain permission of authorities.

MAX. SIZE: No restrictions on length or breadth of a vessel. Draft should be less than 10 m. when vessel is alongside a pier, or 12 m. when anchored at an anchorage.

RADIO: Pusan Harbour Radio Station: call sign, HLP. Frequency, 500, 434 kc/s. operation round the clock.

Cable Harbour Master 12 hrs. in advance, advising ETA, last port and max. draft. If name of Agent is included, the Harbour Office will inform Agents.

VHF is now available.Calling Channel 16. Working Channel 14. Call sign "Harbour Control". Range about 12 miles.

A radar has been sited at the Harbour Office to help vessels approaching in poor visibility.

TUGS: Tugs join an arriving vessel at immediate interior to breakwater, Pusan Harbour, Ship's own lines are used.

BERTHING: Normally in daylight only.

	Length	*Beam*	*Draft*
Pier No. 1	407 m.	115 m.	28 ft.
Pier No. 2	407 m.	116 m.	28 ft.
Quay way No. 2	645 m.	—	27 ft.
Pier No. 4	556 m.	145 m.	29 ft.

STEVEDORES: On basis using full gangs per day, the capacity is : 1,000 L/tons on general cargo; 1,200 L/tons on grains; 1,500 L/tons on anthracite or coal.

TANKERS: A T-head oil pier extends about 700 ft. on the S.E. side of the North harbour. Least depth at pier head is 32 ft. Used by tankers servicing Korea Oil Corporation.

DEVELOPMENTS: Dredging of the approach channel to piers to about 36 ft. Dredging Northern section of harbour to 29 ft.

MEDICAL: Service is available at short notice.

FRESH WATER: Available. Rate of water supply, 80 L/t.p.h. Supplied at pier, or by barge.

FUEL: Availability on Bunker "A", Bunker "C", LRFO, LO and diesel oil.

FIRE PRECAUTIONS: Port has separate anchorage for tankers. Port requests for compliance with regulation not to contaminate waters with inflammable substances, e.g. petroleum products. Tankers are prohibited to clean tanks in port.
GANGWAY/DECK WATCHMEN: This service is available.
OPENING/CLOSING HATCHES: Usually carried out by stevedores.
CUSTOMS ALLOWANCES: One carton cigarettes or 1 lb. of tobacco, and one bottle wine or spirits allowed, each man.
IDENTIFICATION CARDS: Crew required to carry valid identification cards at all times.
CONSULS:

Consul, Republic of China (Formosa)	Tel. 4-0276
Consul, Japan	,, 22-0135

REPAIRS: All repairs can be effected.
DRY DOCKS:

Name of facility	*Capacity*	*Location*
Korea Ship Building Eng. Corp. No.1	5,000	Pusan
Korea Ship Building Eng. Corp. No.2	10,000	Pusan
Korea Ship Building Eng. Corp. No.3	100,000	Pusan
Dae Sun Ship Building Corp.	4,000	Pusan

REPATRIATION: No facilities.
AIRPORT: Airport is at Suyeng about 12 km. from Pusan. Japan-bound plane takes off once a day.
TIME: Korean Standard Time. 9 hrs. ahead of GMT. No alterations during year.
HOLIDAYS: 1st-3rd January; 1st March; 10th March; 5th April; 6th June; 17th July; 15th August; 3rd October; 9th October; 24th October; 25th December.

On above holidays vessels can be discharged and loaded with permission to work granted by the Customs Authority on request.

Local holidays when no work may be performed are: New Year's Day in Lunar Calendar, and the Moon Festival (15th August) in Lunar Calendar.
POLICE/AMBULANCE/FIRE: Police, 22-0863/2497; Ambulance, Pusan Quarantine Station, 6-1371, 4-5736.
TELEPHONES: "Port Telephone Service" operates for purpose of serving communication on board-shore.
SERVICES: Adjustment of compass, available.
SHORE LEAVE: Allowed.
DELAYS: Port congestion is experienced occasionally.
AUTHORITY: Pusan District Marine Bureau.

ULSAN: 35.27N.129.23E. (See Plan Book)

DOCUMENTS:
3 copies of Manifested Parcels on board.
3 copies of the Store List.
3 copies of List of Narcotics on board.
3 copies of List of Arms and Ammunition on board.
3 copies of List of Vessel's Foreign Currency.
3 copies of List of Crew's Foreign Currency.
3 copies of List of Vessel's Tobacco, Cigarettes, Spirits, etc.
13 copies of the Crew List.
3 copies of List of Crew's Personal Effects, Tobacco, Cigarettes, Spirits, etc.
Crew's Vaccination Certificates.
Deratisation Exemption Certificates.
Clearance from Last Port.
10 copies of List of Landing Passengers, if any.
10 copies of List of Passengers in Transit, if any.
3 copies of List of Passengers Baggage.

PILOTAGE: The seaward approaches to the Imodco Terminal mooring site are free of underwater obstructions and existing landmarks and navigation aids are adequate. Depth of water not less than 65 ft. in approaches. The Imodco Terminal can be approached with the summit of Pongdae San bearing 333° true. When in position the following navigation fix will obtain at the mooring site:

Pongdae San (summit)	bearing 333° true	distance 2,915 yd.
Pongjin Hang Light (end of breakwater)	" 053° true	" 4,770 yd.
Chuck To (centre cut)	" 255° true	" 3,800 yd.

A good radar echo will be obtained from the tanks ashore at approximately 20 miles, the Imodco buoys at a distance of 8 miles, and the small buoys, marking the floating hose heading off the Imodco buoy, at 1.5 miles.

Lights ashore, lights on the Imodco buoys and on the small buoys appear to be unreliable.

After clearing Customs a Harbour Pilot will board the vessel to direct it to the buoy and conduct the mooring operations if required. There is no night mooring. However, unmooring is carried out during darkness as well as in daylight.
ANCHORAGE: Anchor the vessel about 1 mile South-east of the buoy, if the weather permits. In this location it is less difficult to find vessel, when in fog. Do not anchor less than 1 mile from buoy, and under no circumstances can the anchors ever be used on approaching the buoy terminal, chain cables and pipe-lines are located at this site and anchoring is strictly prohibited.
HEALTH: Entry prediction to be supplied to quarantine authorities by vessel's Agent 24 hrs. before arrival. Master required to complete Health Declaration when officer boards on arrival. Free pratique is automatic when coming from another Korean port.
RADIO: There is no marine radio telephone at Ulsan to communicate with on radio telephone frequency. A small transreceiver on shore can communicate with attendant launch.
BERTH DESCRIPTION: 2 berths at single buoy moorings.
No. 1 Imodco Buoy
Position: Lat. 35° 27′ 15″ North, Long. 129° 23′ 30″ East.
Description: A 12.5 m. red and white vertically striped buoy.
Lights: On buoy; alternate flashing red and white every 12 sec., visibility 5 miles or more. Duration of each flash 4 sec.
On hose; there are 3 red flashing marker lights equally spaced along 675 ft. hose, visible for 2 miles.
All of the above lights are activated by photoelectric cells.
Radar Reflector: On buoy's mast.
Foghorn: A 2-sec. blast, period 20 sec., range 1 mile. Must be turned on at the buoy.
Soundings: 11 fathoms in buoy area.
No. 2 Imodco Buoy
Position: Latitude 35° 26′ 44″ North, Long. 129° 23′ 20.5″ East.
Description: A 12.5m. red coloured buoy.
Lights: On buoy; has a range of at least 5 miles, on hose; as for No. 1 Imodco buoy.
Foghorn: A battery powered foghorn with a range in excess of 0.5 mile.
DRY CARGO BERTHS:

Commercial harbour mainly serves export of chemicals, fertilisers and by-products of the refineries. The harbour lies about 4 miles in from the sea and there are 4 berths available with depths up to 33 ft.

Quarantine/Pilot station situated in position 35° 27′ 26″ N., 129° 24′ 30″ E.

Entrance at night is not permitted. Only 1 tug is available. Water is available. No VHF. Max. tide in harbour is 1 ft.
BERTHING: 2 launches are in attendance during mooring and unmooring operations. 1 launch will keep the hoses clear and the other handles the mooring rope. Both bow anchors are to be hove well up in the hawse pipes and properly secured before reaching the buoy. Anchors are never to be used while on the buoy, they can foul buoy cables and pipe-line on the bottom if released.

No. 1 Buoy. The vessel will be moored with 4 to 5 ropes off the bow. No rope used from the well decks. 1 rope will be run single to the buoy to heave the vessel in proper position, all other lines will be used double by sending one end out through the port or starboard bow chock and hove back through the opposite side of the bow chock, sufficient slack is brought on board so that a complete set of turns can be securely placed on the bollard. A good messenger rope about 3.5 in. to 4 in. circumference, at least 400 ft. in length, will be required to heave the lines around the mooring arm on the mooring and back on the vessel. The first line used single will be doubled up last.

No. 2 Buoy. The vessel will be moored with 2 nylon lines, 250 ft. in length, floating off the buoy. 2 of the ship's mooring ropes will be run to the buoy to heave the vessel in proper position. At about 40 yd. distance from the buoy a good messenger rope will be required to pick up the floating ropes one by one. When the floating ropes are made fast on board, 1 of the 2 ship's ropes sent to the buoy will be doubled up.
HOSES: *No. 1 Buoy.* There are 2 sets of 12 in. hoses and 1 set of 8 in. hose. The 2×12 in. hoses are for crude oil and the 8 in. hose for gas oil. The hoses are 675 ft. in length from the buoy manifold and are floating in plastic doughnut shaped floats. The hose connections are always made to the port manifold, and are lifted one at a time to the ship's manifold. Each hose, when full of cargo and equipment, is over 1.5 tons in weight.

No. 2 Buoy. There are 2 strings of 16 in. hoses, each 945 ft. in length. The final 70 ft. of hose is reduced to 12 in. to permit lifting by the tanker's lifting gear. The hose connections are made to the starboard manifold of the vessel.
BUNKERS AND WATER: Available by barge only.
BALLASTING: After the vessel has been somewhat more than half discharged, the vessel should be ballasted to a safe margin, to draw not less than 12 to 13 ft. forward. This will avoid the vessel yawing widely on the buoy with strong winds and assist in avoiding contact with the buoy and hoses. Vessel will moor about 120 ft. from buoy.
CUSTOMS ALLOWANCES: One carton cigarettes or 1 lb. of tobacco, and one bottle wine or spirits allowed, each man.
IDENTIFICATION CARDS: Crew required to carry valid identification cards at all times.
REPATRIATION: Nearest facilities for crew change or repatriation are at Pusan.
TIME: Korean Standard Time, 9 hrs. ahead of GMT. No alterations during year.
HOLIDAYS: 1st January; 1st March; 5th April; 6th June; 17th July; 15th August; 3rd October; 9th October; 24th October; 25th December.
SHORE LEAVE: Allowed up to midnight.
GENERAL: Vessels arriving at Ulsan should radio to Agent at Pusan 4 days in advance information on size of vessel's manifold connections, as the adapters, if required, will have to be made by the Korea Oil Corp. This applies mainly to vessels arriving at Ulsan for the first time or in case there has been any alteration to the manifold since the last arrival.

While on the buoy the vessel will be required to provide sleeping quarters and linen for about 8 to 10 men; this includes the discharging Master and his apprentice. The standby men include launch-men and riggers; these men connect and disconnect hoses and are mainly kept on board for emergency.

The discharging Master will remain with the vessel during its entire operation on the buoy. Under certain conditions, should it become necessary, they may ask the vessel for meals; however, food for standby men is generally furnished from ashore.

The ship's engines must remain ready for immediate use.

CHIEF OFFICERS REPORT: 1975

Vessels Particulars:
Length Overall — 162.18 m. Breadth — 22.8 m.
Summer Draft — 10.382 m. Summer d.w.t. 21,705 m./tons.

Dry Cargo Berths

Anchorage: Local Agents generally wireless the quarantine anchorage position which is approx. 1.5′ W.N.W. from the position shown on BA Chart No. 898. Care should be taken while anchoring as there are innumerable fishing floats, nets, etc. North of 35° 28′ N., and West of 129° 23.7′ E.

Restrictions: No pilotage between sunset and sunrise. Curfew from 0000-0400 hrs.

Pilotage & Berthing: The standard of pilotage was generally good. Pilot arranged by Agents and embarks at quarantine anchorage after vessel is cleared by authorities. 1 anchor is used while going alongside. 1 tug of unknown h.p. and 2 mooring boats assist while berthing. 4 berths are available:-

No. 1 Pier — Length 300 m. Depth variable (see plan)
No. 2 Pier — Length unknown. Depth supposed to be 36 ft.
No. 3 Pier — Length 165 m. Depth 29 ft.
No. 4 Pier — No details known.

Local authorities themselves do not have any idea as to the actual depths alongside. It is advisable to sound the bottom twice daily especially at No. 1 Pier as the depths were found to vary almost every 10 ft. Cargo is loaded/discharged by vessels cargo gear. Rate of loading Bagged Urea is approx. 400 m/tons per gang per day. Working hours are normally between 0700 hrs. and 1900 hrs. every day, Saturdays and Sundays included. Only on National Holidays no cargo is worked. Discharge of Bulk Sulphur and Gas/Product Carriers is around the clock. A vessel carrying 28,000 tons of Bulk Sulphur was discharged in 5 days. There is 1 crane and conveyor belt on No. 1 Pier only for handling Sulphur. It was observed that sometimes small coasters were loaded/discharged by mobile cranes.

Stevedores: Ulsan Port has a rule that a gang engaged for one particular hatch will only work that hatch from start to finish and will not work any other hatch, not even the other end of the hatch if the hatch has more than 1 set of derricks. Gangs have to be ordered before noon for the next day.

Medical — Local hospital used, patients normally taken there by watchmen.

Density — Apparently varies. Once 1016 was obtained while 10 days earlier 1020 was obtained.

Fresh Water — Available from barge whose capacity appears to be 150 tons. At least 24 hours notice necessary. Charges approx. 150 Won/Ton. (1 U.S. $ = 480 Won approx.)

Fuel — Not available.

Repairs — Facility available but rates exorbitant.

Dry Docks — Hyundai Shipyard located at Ulsan. Builds VLCC's but we have no information regarding details.

Watchmen — Essential on foreign vessels. Arranged by Agents.

Hatches — As per charter party but suggest use own crew as labour are only experienced with wooden hatchboards.

Repatriation — Usually done through Seoul which is about 5 hours away by bus. We changed Radio Officers and experienced no difficulty.

Telephones — Placed on board, but only for local calls via exchange.

Services — Only 1 shipchandler who handles everything including providing watchmen, laundrymen, etc.

Identity Cards — Shore pass issued for Ulsan valid for 3 days. To be renewed every fourth day. Usually done by watchmen who collect all passes and go to Immigration Office.

Surveyors — Lloyds can be arranged from Busan.

General — Ulsan is a very busy port with a large amount of local and Japanese coastal traffic. Local Agents keep trying to shift bigger vessels ahead and astern to try and squeeze in small coasters. It is advisable to strictly adhere to the charter party rules at all times in this port to prevent delays and expense on vessels account.

AUTHORITY: Korea Oil Corporation, Ulsan.

YOSU: 34.44 N. 127.45 E. (See Plan Book)

(A) SINGLE BUOY MOORING, HONAM OIL REFINERY
(B) PRODUCT WHARF, HONAM OIL REFINERY
(C) NAKPO WHARF, NAMHAE CHEMICAL CORPORATION
(D) PIER, DAE SUNG METHANOL PLANT
(E) DRY CARGO, YOSU HARBOUR

DOCUMENTS:

- Last Port Clearance.
- Register.
- 12 copies of Crew List.
- 12 copies of Passenger Manifest.
- 3 copies of Store List.
- 3 copies of Bonded Store List.
- 3 copies of Arms and Ammunition List.
- 3 copies of Livestock List.
- 1 copy of Vaccination List showing dates of last smallpox and yellow fever vaccination, etc.

PILOTAGE: There are 2 pilot stations. Pilot station for vessels of less than 30,000 g.r.t. is located at Lat. 34° 44′ N., Long. 127° 49′ E., and for more than 30,000 g.r.t., such as crude tankers, is located at Lat. 34° 39′ N., Long. 127° 58′ E.

Vessels calling at Yosu must cable the exact time of arrival at the pilot station to ship's Agent and Harbour Pilot's office. VHF Radio for calling Agent is Channel 16, name Agent and switch to Channel 26 to talk.

MEDICAL: ETA to be supplied to quarantine authorities by vessel's Agent 24 hours before arrival. Master required to complete Health Declaration when officer boards on arrival. Free pratique is automatic when coming from another Korean port.

There are medical facilities in Yosu town. Inoculations and vaccinations can be arranged by the quarantine doctor.

The Quarantine Stations are located at Lat. 34° 42.5′ N., Long. 127° 52.7′ E., for deep drafted vessel and Lat. 34° 45.2′ N., Long. 127° 46.3′ E., for less drafted vessel. The Quarantine inspection can be made at other than the above location depending on the situations. The inspection takes place during daylight.

RADIO: See "Radio" in section "A".

TUGS: Available, up to 2,000 h.p.

DENSITY: 1025.

FRESH WATER: Fresh water is available for delivery to ships.

FUEL: Bunkers available by barge subject to advance notice being given.

REPAIRS: There are repair facilities in Yosu.

CUSTOMS ALLOWANCES: One carton cigarettes or 1 lb. of tobacco, and one bottle wine or spirits allowed, each man.

REPATRIATION: Crew changes or repatriation can be arranged.

TIME: Korean Standard Time, GMT plus 9 hours. No alterations during year.

HOLIDAYS: 1st, 2nd and 3rd January, 1st March, 10th March, 5th April, 5th May, 6th June, 17th July, 15th August, 1st October, 3rd October, 9th October, 25th December. 1st January (Lunar Calendar), 8th April (Lunar Calendar), 15th August (Lunar Calendar).

IDENTIFICATION CARDS: Crew required to carry valid identification cards at all times.

SHORE LEAVE: Shore leave for ship's personnel is arranged by ship's Agent and the local authorities.

(A) SINGLE BUOY MOORING, HONAM OIL REFINERY

GENERAL DESCRIPTION: The 10 m. diameter IMODCO Single Buoy Mooring Terminal is located at the approximate position of Lat. 34° 51′ N., Long. 127° 47.3′ E. The terminal is modified to provide a safe mooring for tankers up to 200,000 d.w.t. under the environmental condition of about 40 knots maximum wind speed.

MAX. SIZE: The safe depth of Samg i channel which is located 4 miles South of the Terminal is 19 m. at about LLW.

The tidal rise in this area is 2 to 3.5 m. at high tide. Therefore, the terminal accepts tankers having draft up to 19 m.

NAVIGATIONAL AIDS: Vessels calling Honam Oil Terminal should have charts No. 242 and 209 published by the Republic of Korea Hydrographic office. Within the area, there is no port radar service.

NOTICE OF READINESS: Notice of Readiness will be tendered and accepted at the time when the vessel is in all respects ready for cargo operations and in accordance with charter party agreed.

BERTHING: Mooring operations are done jointly by ship's crew on the forecastle and mooring gang from Yosu on mooring boat.

The vessel shall prepare 2 strong messenger lines of more than 50 m. each and pass them to the mooring boat. The mooring gang will tie the vessel's messenger lines to 18 in. Buoy ropes' messenger lines. Upon signal from mooring gang, vessel will heave in both mooring ropes up to chafing gear of the ropes on deck and make fast to the vessel's bollards by the 8 turn method.

Normally starboard rope is heaved in first and or both port and starboard ropes are heaved in simultaneously.

It is compulsory to moor with 18 in. Buoy ropes. For the use of these ropes Honam Oil charges a nominal fee for each call at the SBM.

CONNECTING HOSES: The vessel must install two 16 in. ASA type flanges to her starboard manifolds, rig starboard derrick doubled and capable of lifting up to 10 tons of weight prior to berthing and have standing by a derrick operator and responsible ship's officer at her manifolds upon berthing.

Connecting/disconnecting cargo hoses will be done by shore team. The team leader will co-ordinate with ship's cargo officer for cargo hose handlings.

DISCHARGING: Discharging should be commenced by the signal of Terminal representative. The Terminal receiving facilities have a working pressure of 225 p.s.i. with safety factor of 7:1, but the pumping pressure must be raised gradually and then the pressure should be raised up to 225 p.s.i. at ship's manifolds. The vessels are required to find out discharging rate at least every 4 hours.

SHIP'S READINESS: During discharging the international code flag "B" shall be displayed from a topmast signal halyard during daylight hours. During hours of darkness, a red light shall be displayed, visible at a distance of at least 1 mile and show an unbroken light all around the horizon. The vessel's engines must be ready while discharging at a moment's notice and the Master is responsible for having sufficient officers on duty both on bridge and in engine room to take action immediately upon instructions from Honam Oil representative.

In order to avoid riding up on the buoy and the cargo hoses, astern movements of the vessel are required. For turbine vessels when for various reasons, the Chief Engineer officer is unable to completely stop his engines, the r.p.m. must be kept at a minimum by using the turning gear. The propeller must also propel the vessel astern only. Vessels which are not able to conform with these regulations should advise Honam Oil representative in writing. In addition to the lights usually displayed, vessels discharging cargo during darkness, will illuminate the area around the ship and especially the IMODCO Buoy to the satisfaction of the terminal representative in order that any oil on the surface of the sea may be readily detected and appropriate action taken. Vessels should provide suitable floodlights for working on deck during night operation.

BALLAST: There are no facilities for reception of dirty ballast. It is the ship Master's responsibility to see that no oil or oily ballast is spilled or pumped overboard from his ship. Drip-pans must be used at all times and all scuppers must be plugged. The waters in or adjacent to the terminal must not be polluted and only oil-free bilge water may be discharged at the terminal. If, during inspection or during progress of discharging, it is revealed that the vessel's tanks are not oil-tight, she will be refused further discharging facilities.

SAFETY: Sufficient officers and crew personnel must always be on board to attend to the vessel and to cargo. Power must be available at all times on deck winches and windlass while the vessel is in the moorings.

The presence of unauthorised craft alongside is extremely hazardous, and Masters are requested to require all unauthorised craft to clear the vessel's side prior to commencement of cargo discharging. Master should shut down all cargo operations during severe electrical storms and under any circumstances which imperil the cargo operation.

While bunkering barge is alongside the crude tanker, it is required that ship's Master shall check mooring lines, fenders or engines of bunkering barge or other safety items.

RADIO: In Korea there are 4 coastal radio stations, Pusan, Inchon, Mokpo and Yosu as listed in International communication publications. Vessels calling Yosu would call Pusan, Mokpo, and Yosu.

For the vessels visiting Honam Oil Refinery, it is recommended to call Mokpo coastal station, call sign HLM and address to: Honam Oil Yosu Refinery Telex number K762 or K764, via: Mokpo Radio. The Mokpo Radio keeps telex operation network with telex room of Honam Oil Yosu Refinery and messages can be handled within half an hour during the service hours of Honam Oil Yosu Refinery Telex room (weekdays: 0830–1930, Saturday: 0830–1500, Sunday/Holiday: off-service). Also vessels within VHF voice radio range of about 100 km to Yosu, call Ch-16 (Simplex), Switch to Ch-26 (Duplex) and then ask for vessel Agent, Harbour Pilot or Honam Oil Yosu Refinery. Honam Oil Yosu Refinery provides the telephone service every day from 0830 to 2300 hrs. local time with telephone number 3141-9. (Terminal representative located on extension 279 for office hours, 370 for out of office hours).

The communications from tanker to shore when moored at the IMODCO Buoy will be made by ferry boat and refinery matters are made by transceiver handled by refinery personnel on board.

AUTHORITY: Honam Oil, Yosu Refinery.

(B) PRODUCTS WHARF, HONAM OIL REFINERY

BERTHING: The 4 products berths are located in approximate position 34° 51′ 38″ North, 127° 44′ East, in East-West direction and designed to accommodate 4 tankers simultaneously viz. No. 1 and No. 4 berths for about 5,000 d.w.t. tankers, No. 2 for 3,000 d.w.t., and No. 3 for 20,000 ton tankers. No. 3 berth is under modification and installation of Chicksan loading arm. The Honam Oil Product Wharf is designed to moor and unmoor tankers on a 24-hour basis, depending on the condition prevailing at the time and the Master's judgement. The wharf is well and sufficiently illuminated for night work.

Minimum mooring line requirements are:

Forward: 3 headlines	Aft: 3 stern lines
1 spring line	1 spring line
1 breast line	1 breast line

In strong wind 1 more head and 1 more stern line are required.

The direction of the tidal stream in the vicinity of the products wharf is nearly rectilinear and parallel to the berths, the flood running in a 272° direction and the ebb in an 084° direction. The maximum velocity is 2.5 knots or more. The duration of the ebb stream is about 6.75 hours, and the flood stream 5.5 hours.

The tidal range is about 4 m. Therefore, ship's crew must adjust vessel's ropes with tidal height so as to avoid damage to the ropes.

MAX. SIZE: There is shallow water of about 10 m. depth at LLW en route approaching the channel to the wharf. With this depth of water, the Terminal limits vessel's draft to less than 32 ft.

CONNECTING HOSES: It is the policy of the Honam Oil Refinery Co., Ltd. that the ship's crew shall be responsible for the connecting and disconnecting of the cargo hoses at the ships manifold. The wharf crew will operate the cargo hose winches.

FRESH WATER: Vessels requiring fresh water request required amount of water to ship's agent in advance.

LOADING: The refinery can furnish loading at 5,000 b.p.h. or more. The Chief Officer should, however, state the loading rate he requires which should be maximum consistent with safety at all times. A qualified deck officer should, however, be on deck during the entire loading operation. The international code flag "B" shall be displayed from the signal yard-arm during daylight hours. A red light shown during hours of darkness. Lines for loading and deballasting are as follows:

Product	*Lines Dia., inches*
LPG	6
Regular gasoline	10
Military and Premium gasoline	12
Kerosene/JA–1	10
Naphtha	10
JP–4	12
Solvent	6
Diesel	12
LRFO/NSFO	10
Bunker–C	14
Bunker–C	12
Asphalt to Cosmos Wharf	3
Bunker–A	10
Ballast water	10
LPG Vapor return	3

REPAIRS: There are no repair facilities and also repairs are not allowed on the product wharf. In the event of emergency cases, Honam Oil will assist in carrying out repairs under the supervision of refinery's safety personnel to expedite vessels from the wharf and a quick turn around.

RADIO: See "Radio" in section "A".

AUTHORITY: Honam Oil Refinery.

(C) NAKPO WHARF, NAMHAE CHEMICAL CORPORATION

A straight berth which could accommodate one 50,000, one 30,000 and two 20,000 d.w.t. vessels is located at about Lat. 34° 51′ 40″ N., Long. 127° 44′ 40″ E. The wharf is handling raw material by 800 tons crane and product of fertilizer by 300 tons crane.

(D) PIER, DAE SUNG METHANOL PLANT

Located close to the product wharf of Honam Oil Refinery at about Lat. 34° 51′ 30″ N., Long. 127° 44′ 05″ E. Maximum vessel size and draft are about 4,400 d.w.t. and 5.5 m. respectively.

(E) DRY CARGO PORT

PIERS: 3 piers are located in Yosu town at about Lat. 34° 44.3′ N., Long. 127° 45.3′ E. and consist of No. 1, No. 2 and No. 3 Piers.

RESTRICTIONS: No. 1 Pier is used for only small vessels. No. 2 Pier for the vessels of less than 20 ft. draft and max. draft of No. 3 Pier is 26 ft. At anchor draft up to 35 ft.

CARGO-HANDLING FACILITIES: Crane barge of 30 tons capacity is available.

RADIO: See "Radio" in section "A".

AUTHORITY: Local Port Authority, Yosu.

NOTES

Please also advise Shipping Guides Ltd.

Kuwait

KHOR-EL-MUFATTA: 28.39 N. 48.23 E.

DOCUMENTS: The only document required for this port is copy of the Cargo Manifest.
PILOTAGE: No pilotage available.
ANCHORAGE: Vessels anchor to seaward side of black and white conical shaped buoy which is situated 2 miles to the East of the Khor. Mufatta is some 55 miles by sea from the port of Kuwait. The flashing lights marked on the charts at the entrance to the Khor have been discontinued.
HEALTH: Before arrival vessels required pass following items to Agent (about three or four days prior to ETA). Name of vessel, Nationality, ETA, Last Port of Call, tonnage, quarantinable disease on board (if any) infectious disease (if any), sick persons, death, and any requirements.

ETA should be notified again 24 hours before arrival.
RADIO: No separate radio service for this port and all communication to Agent to be made through Kuwait Radio 9 KK.
TUGS: None.
BERTHING: Ship discharged in open roadstead.
STEVEDORES: Sent from Kuwait. At least 48 hours notice required.
MEDICAL: Facilities available only at Kuwait.
DENSITY: Salt water.
FRESH WATER: Not available.
FUEL: Can be arranged at Mina Abdulla. Mina-al-Ahmadi.
FIRE PRECAUTIONS: No equipment for fire-fighting.
GANGWAY/DECK WATCHMEN: Can be arranged through Agent.
CERTIFICATES: All usual documents such as Ship's Manifest, Bill of Health, Crew List, Clearance from last port, Store List, Bonded Store List, etc.
CUSTOMS ALLOWANCE: (Tobacco) No restrictions. (Wine and/or Spirits) Alcoholic beverage strictly prohibited to be held out of bond. Master allowed keep limited quantity in cabin.
CARGO GEAR: Ship's gear used for discharging.
IDENTIFICATION CARDS: Not needed.
REPAIRS: None.
REPATRIATION: Can be arranged via Kuwait.

Seamen arriving Kuwait Airport to join vessels at Partitioned Zone ports can obtain transit visa at airport, if Agents arrange to submit necessary guarantee to Immigration Authorities confirming that they are in transit and joining vessels calling at Kuwait and/or Partitioned Zone. In order to meet the crew at airport and arrange transit visa, cables confirming their arrivals and flight numbers are to be sent to Agents to reach them at least 24 hours before arrival of crew.

Marine Superintendent of Owners, or Owners' representatives and businessmen visiting Kuwait must have valid visas. Such visas can be obtained from Kuwait government's diplomatic missions abroad.
AIRPORT: Kuwait Airport served by regular airlines.
TIME: GMT plus 3 hours.
HOLIDAYS: New Year's Day; Eid al Fitr; Accession to the Throne; Eid al Haj; 1st Muharram; Prophet's Birthday; Rajab.
TELEPHONE: Cannot be arranged on board.
PROVISIONS: Foodstuffs, beverages, tobaccos, etc., available from ships chandlers in Kuwait in limited kinds and quantities. Prices more expensive than town of Kuwait due to long transportation. Ship's Agent should be advised by cable well in advance.
SPECIAL SERVICES: Swedish Welfare for Seamen, Lloyds Surveyor, Butterworth tank cleaning machines and equipment, and under-water cleaning.
SHORE LEAVE: Not limitations.
AGENT: See "Shuwaikh".

MINA ABDULLA: 29.02 N. 48.11E. (See Plan Book)

LOCATION: Mina Abdulla bounded on South by parallel of Lat. 28° 55′ N. on the East by Long. 48° 18′ E. and on North by a line joining following points:

(1)	29° 01′ 45″ N.	48° 09′ 25″ E.
(2)	29° 01′ 45″ N.	48° 10′ 06″ E.
(3)	29° 02′ N.	48° 10′ 18″ E.
(4)	29° 02′ N.	48° 18′ 00″ E.

FLAG: Every merchant ship when entering or leaving port between sunrise and sunset shall fly her national flag and national flag of Kuwait and, when entering port, shall fly her signal letters. All vessels required to fly Kuwait flag on foremast during daylight hours. Flags may be obtained from Agent.
APPROACHES: 2 oil-loading berths supplied by 3 pipe-lines are situated here. A number of large tanks define tank farm area. A refinery stands to S.W. of tank farm. The flare is conspicuous. Other conspicuous objects in area are the radio tower, Mosque Minaret and the 4 leading beacons for 2 berths. These are lit for night berthing by 3 white lights on each beacon in the form of triangles, the beacon lights for Berth No. 1 are occulting every 5 seconds, the lights of No. 2 Berth are fixed.

When a vessel is ready to enter at the same time as another vessel is ready to leave the port, the outgoing vessel shall have priority over the incoming vessel, subject always to the provisions of the International Regulations for Preventing Collisions at Sea and to the requirements of safe navigation.
DOCUMENTS: Before leaving Kuwait the Master shall be responsible for obtaining a Port Clearance Certificate. The documents necessary for vessels to enter and leave Mina Abdulla are:
Enter
Ship's Mainfest.
Bill of Health.
Crew List.
Clearance from Last Port.
Light Dues Certificate.
Clear
Register.
Load Line Certificate.
Radio Certificate.
Safety Certificate.
Last Port Clearance.

Masters and Agents of vessels shall, when called upon by a Customs Officer or Marine Officer, produce any documents relative to the landing or shipment of their vessel's cargo in the port. The Master or his representative is required to hand to the Company a written Notice of Readiness to load.

Discharging certificates of oil cargo loaded from Kuwait and Partitioned Zone ports are to be sent to vessels' local Agents immediately duly attested by the Customs Authorities and Arab Consulate covering full quantity as per Bill of Lading.

If a vessel, which has not submitted the certificate for the previous voyage, calls for the second time, she will be allowed to load and sail only after paying a cash deposit of KD 2,000.

In order to avoid delay in berthing, loading and outward clearance for vessels, all owners must give instructions to Agents at discharging ports to forward relevant cargo discharge certificates to Agents at loading ports without delay.
PILOTAGE: Mooring Master normally meets vessels within 1.5 miles of terminal sea berths and will act as Pilot and as Company's Representative and remain on board during vessel's stay in port. Vessels requested to have Pilot ladder of an approved pattern, safely and securely rigged, ready for immediate use, and long enough to reach Mooring Master's launch. When it is necessary for a vessel to anchor before being berthed she should do so in the recommended anchorage area. Two 45 ft. tugs painted blue with white superstructure assist berthing by running mooring lines to stern buoys. The Pilot boat has a blue hull and white superstructure and is radar equipped. The name "Independent" is on each bow and stern.

Vessels with a Mooring Master on board shall display International Code Flag "H" in a prominent position whilst manoeuvring under his advice, and shall, if so instructed by Mooring Master, display a flag indicating berth to which vessel is proceeding.
ANCHORAGES: Vessels requiring anchor for any reason in port limits should do so within area enclosed between positions:

29° 02′ N.	48° 14.3′ E.
29° 02′ N.	48° 15.1′ E.
29° 01.2′ N.	48° 15.1′ E.
29° 01.2′ N.	48° 14.1′ E.

or within reasonable proximity to the East if congestion arises in anchorage area.

All vessels and craft within the port shall be navigated with care and caution, at a speed, and in a manner which shall not endanger the safety of other vessels or craft. In particular, special care and caution is to be observed in passing vessels or craft of the following category: weight-lifting or deeply-laden craft, vessels which are mooring or moored at terminal buoys, vessels or craft in tow and vessels or craft engaged on diving, dredging, grabbing, pile-driving or construction work, survey operations or the removal of obstructions.

All vessels within the port shall anchor, or moor and unmoor, when and where required by the Marine Officer, and shall be moved from place to place as required and by such means or appliances as may be ordered by the Marine Officer.

Vessels or craft shall not anchor near any submarine lines within the port limits, unless engaged on work which, in the opinion of the Marine Officer, necessitates their doing so.
MAX. SIZE: Vessels of unlimited length can be accommodated. Approximately 90,000 d.w.t. tankers fully loaded up to a maximum draft of 46 ft. on arrival, calling for bunkers only, can be accommodated. Vessels in the 200,000 d.w.t. class can be accommodated arriving in ballast condition for loading part cargoes up to a max. sailing draft of 51 ft. or for normal bunkering requirements when remaining in ballast.
HEALTH: Quarantine regulations administered by Kuwait Government's Quarantine Medical Officer. Pratique granted at anchorage or berth.

Vessels calling at Mina Abdulla are requested to send following information to "Health Shuaiba Port":
(1) Name of vessel.
(2) Last port of call.
(3) Health condition of crew.
(4) Validity of Smallpox and Cholera Certificates.
(5) Request for Free Pratique.

No craft, other than one having on board the Mooring Master or Port Health Officer, may approach any vessel entering the port and no other person may board any such vessel until free pratique has been granted.

Adequate covers shall be placed over all overside discharges.

Masters shall be responsible for ensuring that no unhealthy or offensive matter is deposited from their vessels on port premises.

Any such matter so deposited that is, or becomes offensive, or, in the opinion of the Port Health Officer, injurious to health, may be removed, confiscated or destroyed and the place of deposit cleaned or disinfected on the direction of the Marine Officer at the expense of the Master responsible.

Any vessel, having on board offensive goods, or goods which, in the opinion of the Port Health Officer, are injurious to health, may be ordered to leave the port by the Marine Officer.

No ashes, refuse or other objectionable matter shall be thrown overboard from any vessel either on to any premises or into any waters of the port.

RADIO: Master shall inform "Mina Abdulla Marine" at least 72, 48 and 24 hours notice of time of arrival via Kuwait Government Coastal Radio Station, call sign "9KK".

MOORING: Mooring Masters may decline to moor any vessel if in his opinion it is not equipped with satisfactory mooring facilities, lines and gear, etc.

Vessels shall provide such tackle as may be required for loading or discharging cargo.

Vessels berthed at sea terminals shall provide not less than 6 good quality mooring ropes and/or wire hawsers aft, each not less than 120 fathoms in length. An eye shall be spliced in ends of ropes to secure lines to pelican hooks on buoys. 2 insurance wires are provided in each berth. Ships must have both anchors ready for immediate use each with minimum of chain as follows:

Below: d.w.t. 10,000, 8 shackles. Between: d.w.t. 10,000–20,000, 9 shackles; 20,000–30,000, 10 shackles. Above: d.w.t. 30,000, 11 shackles; 40,000, 12 shackles. Above 60,000, 13 shackles; and above 80,000, 16 shackles. The term shackles is to be interpreted as a length of 15 fathoms. Masters shall be responsible for seeing that a strict watch is kept on their vessel's moorings to prevent ranging.

BERTHING: Master shall, before berthing, advise Marine Officer of any special damage or disability to the vessel. No. 1 Berth Lat. 29° 01′ 16″ N., Long. 48° 11′ 52″ E. approximately, situated about 2 miles offshore in 43 ft. water LWOST over sand and coral with fair holding ground. A spar-buoy painted yellow with black bands marks end of submerged steel pipe-lines. A common bunker line to the berths, off-branches approximately 1,000 ft. South of Berth No. 1 and runs in to meet the direct line from shore to this berth. Ends of attached loading hoses marked by can-buoys on either side of the Spar. 4 mooring buoys in Berth No. 1 and 5 in Berth No. 2 painted red and silver located in an arc, 1–2 cables approximately E.S.E. through South of S.S.W. from spar-buoys for vessel's stern moorings. Ship's anchors only are used forward No. 2 Berth (situated approximately half a cable South and 9 cables East of Berth No. 1); Lat. 29° 01′ 0″ N., Long. 48° 12′ 51″ E. approximately. Depth of water in Berth No. 2 is 56 ft. LWOST over mud and clay which is excellent holding ground.

LOADING: Terminal has facilities to load at max. rate of 1,500 t.p.h. in Berth No. 1 and 2,800 t.p.h. in Berth No. 2, but this loading rate can be achieved only when vessel is furnished with appropriate equipment.

Caution: The incoming oil stream is pumped from shore and it is extremely dangerous to close a ship's valve against the incoming oil stream. Such a procedure creates an excessive pressure, which may damage submarine lines, ship's pipe-lines or the terminal facilities. Vessels will be held liable for damages resulting from failure to observe this precaution.

Raising, connecting, disconnecting and lowering of submarine hoses will be performed by shore crew as advised by Mooring Master who will remain on board while ship is mooring, loading or discharging and unmooring. Vessels will provide winch drivers and remove such manifold blanking flanges and fit reducing pieces as required.

Deck hose connections from submarine lines as follows:

Cargo: 10 in. ID, working pressure 150 p.s.i., fitted with 150# ASA steel flanges. Bunker flanges 8 in. ID, working pressure 150 p.s.i., fitted with 150# ASA steel flanges.

Loading and discharging of petroleum vessels shall not be undertaken without permission of Marine Officer.

Loading and discharging of petroleum vessels shall not commence until:

(1) Master or Chief Officer has certified to Marine Officer that all necessary valves are open and that vessel is in proper condition to receive or discharge cargo.

(2) Master or Chief Officer has certified to Marine Officer that all ship's sea valves are closed or blankflanged except those required for water circulation purposes, and that these regulations are being and will be observed.

(3) Ship's tanks have been inspected by an authorised inspector and passed as suitable for loading.

Throughout period of loading and discharging operations, following conditions shall be observed:

(1) A responsible ship's officer shall be on watch on board at a point near tanks which are receiving oil during process of loading. The company's staff have received instructions to stop loading immediately whenever this rule is disregarded.

(2) A capable member of ship's crew shall be stationed by ship's tank valves which are receiving oil during loading.

(3) All pipe-lines and hoses shall, while rigged for loading or discharging petroleum, be directly and continuously earthed and kept constantly under supervision.

(4) No petroleum shall be allowed to escape or overflow.

(5) The following signals will be observed, as well as the radio communications, between ship and shore:

Signal Flag by Day		*Light Signal by Night*
	Starting	
1 Red Flag	Slow Speed	1 Red Light
2 Red Flags	Full Speed	2 Red Lights
	Stopping	
1 Red Flag	Slow Speed	1 Red Light
All Flags Down	Stop	No Lights

(6) When normal ship-to-shore communication fails, the emergency signal to stop the oil flow will be a continuous blast on the ship's whistle until the oil ceases to flow. Steam or air should never be shut off from whistle during loading. When practical, means should be provided for blowing the whistle from the after section of the cat walk. Whenever an Emergency Whistle Signal is used, all loading operations in the berths will be shut down until normal communication is restored. For this reason it is requested that ships in the area refrain from using ship's whistle for other than essential purposes.

Load Lines: Masters are warned that their load lines are subject to scrutiny by the port officer from Mina-al-Ahmadi on completion of loading or bunkering. It is in their own interest therefore, to observe the regulations, as vessels are liable to be delayed and have to pump ashore or be fined if overloaded, and Port Clearance withheld.

BALLAST: As soon as practicable after arrival, all vessel's tanks will be inspected for evidence of oil in ballast. During discharge of ballast, similar inspections will continue. If evidence of oil appears at any of these inspections, the ship must return at once to a point not less than 100 miles from the coastline and there completely discharge all oily or dirty ballast.

Masters will be required to sign a declaration certifying that any water ballast intended for discharge from vessel is clean and free from oil. Arrangements are being made by the Company for dirty ballast disposal facilities to be supplied in the future, if and when required, by vessels in this port.

POLLUTION: Cases of discharging dirty ballast or oil spillages will be investigated and vessels are liable to fines and/or detention. Vessels shall not discharge into the water of the port any part of the content of their cargo, slop, or ballast tanks or bilges which is liable to pollute these waters. Masters shall ensure that pipe-line and equipment are clean before using them for discharging anything into the water of the port. Scuppers shall be plugged effectively and no leakage or spillage of petroleum on board shall be allowed to leak or be swept overboard.

The State of Kuwait has stringent laws in force concerning the pollution of the sea by oil. The following are 2 amended paragraphs of this law:

Paragraph 1, Art. 4. "A person responsible for any pollution as described in Articles 1 and 2 shall be punished by a fine of not less than 1,500 and not more than 6,000 Dinars. In the event of his committing a similar crime within a period of 1 year from the date of his conviction, such a person shall be punished by a fine of not less than 3,000 and not more than 6,000 Kuwaiti Dinars, and in the event of his committing yet another crime within a year from this last conviction he shall be punished by a fine of 6,000 Kuwaiti Dinars."

Paragraph 3, Art. 6.. "The person responsible for pollution may suspend the detention order against the ship on payment, as a cash guarantee, of 6,000 Kuwaiti Dinars to the official entrusted with the execution of such order."

TIDE: The maximum tidal range is 10 ft. 6 in. and velocity of tide is from 0.5 to 2 knots.

DENSITY: 1025.

MEDICAL: Patients will in normal course of events be treated by Quarantine Medical Officer on board. Neither medical nor hospital facilities are provided by the Company. However, in cases of emergency those requiring urgent hospitalisation may be taken by vessel's Agent.

FUEL: Fuel oil bunkers can be loaded in either berth at a max. rate of 500 t.p.h, thus raising the max. loading rate of either berth by 500 t.p.h. for fuel oil cargoes only.

FRESH WATER: Cannot be supplied at Mina Abdulla. In case of utmost need Agent may hire a barge with a capacity of 100 tons of fresh water from Kuwait, and send to Mina Abdulla.

CUSTOMS: Import of firearms and ammunition is forbidden. Under Kuwait Law No. 46, it is an offence to sell or trade liquor within the State of Kuwait. Any person convicted for selling, purchasing, giving away, accepting or acquiring in any manner, liquor or any intoxicating drinks for the purpose of trading and marketing shall be punished by a maximum 3 years imprisonment and a maximum fine of KD 300 or by only 1 of the 2 aforesaid penalties. Alcoholic beverage is strictly prohibited to be held out of bond. Master allowed to keep limited quantity in his cabin.

CONSULS: See "Shuwaikh". The American Consulate is situated just outside Kuwait town, some 30 miles from the terminal.

REPAIRS: No facilities.

REPATRIATION: Seamen arriving Kuwait Airport to join vessels at Kuwait ports can obtain transit visa at airport, if Agents arrange to submit necessary guarantee to Immigration Authorities confirming that they are in transit and joining vessels calling at Kuwait. In order to meet the crew at airport and arrange transit visa, cables confirming their arrivals and flight numbers are to be sent to Agents to reach them at least 24 hours before arrival of crew. Marine Superintendent of Owners, or Owner's Representatives and businessmen visiting Kuwait must have valid visas. Such visas can be obtained from Kuwait Government's diplomatic missions abroad.

AIRPORT: Kuwait.

TIME: GMT plus 3 hours.

PROVISIONS: Aminoil does not provide any chandlering facilities. Masters of vessels calling at Mina Abdulla must arrange for supplies through ship's Agent. Foodstuffs, beverages, tobaccos, etc., are available from ship chandlers in Kuwait in limited kinds and quantities. Prices a little more expensive than in Kuwait due to long transportation. Ship's Agent should be advised by cable well in advance.

CERTIFICATES: See "Documents". There is no organisation for dealing with Deratisation Certificate at Mina Abdulla. Agents are responsible for presentation of Oil-discharging Certificate to Customs Authorities as guaranteed by them. All Cargo Discharge Certificates duly attested by the Arab Consulate are to be sent to Agents directly.

SHORE LEAVE: At present, crews not allowed ashore at Mina Abdulla, and this rule will be strictly adhered to.

REGULATIONS: Main engines shall always be kept ready for immediate use. Steam pressure shall be maintained at min. necessary to operate auxiliaries and to manoeuvre in case of need. Deck steam is to be maintained at all times.

Engine repairs which may prevent working of main engines may only be undertaken with written permission of Marine Officer.

Master shall at all times retain on board sufficient crew to work vessels.

Vessels shall have both anchors ready for immediate use on arrival and departure.

Vessels berthed at sea terminals shall not carry out engine trials without permission of Marine Officer.

Vessels berthing during hours of darkness must if available provide a portable light of an approved gas-tight pattern capable of being placed on either quarter of vessel to illuminate vessel's mooring ropes sufficiently for mooring boat.

Vessels shall provide an efficient accommodation ladder and boat rope for port authorities and, during hours of darkness, shall install adequate approved lighting for same. Failure to comply with this may lead to inward clearance being delayed by authorities, thus incurring delays to vessel.

No swimming in vicinity of vessels or from vessels in berth is allowed.

SHIPMASTER'S REPORT: December 1978

Berth No. 1: This berth is now reserved for loading of naphtha only. Loading rate 1,500 t.p.h. Cargo line is 10 in.

This berth is also fitted with a line of 8 in. for fuel oil bunkers. Rate for bunkering: 500 t.p.h.

Berth No. 2: This berth is operated for loading either crude oil or fuel oil.

The cargo line is 10 in. Loading rate: 2,800 t.p.h.

This berth is also fitted with a line of 8 in. for fuel oil bunkers. Rate for bunkering: 500 t.p.h.

For loading of crude oil cargoes, only the cargo line is used and the actual loading rate is 2,800 t.p.h.

For loading of fuel oil cargoes, both cargo and bunker lines are used simultaneously, and the loading rate is increased to 3,300 t.p.h.

At the end of loading operations, the cargo line is flushed when a different grade of cargo is to be loaded on the following vessel.

AUTHORITY: Kuwait National Petroleum Co., Mina Abdulla.

AGENTS: See "Shuwaikh".

MINA-AL-AHMADI: 29.04 N. 48.09 E.

OPERATORS: Kuwait Oil Company Ltd.

LOCATION: Port of Mina-al-Ahmadi is open roadstead situated on Western shores of the Gulf.

PORT LIMITS: From the shore at Lat. 29° 02′ 50″ N. Eastward to Long. 48° 09′ 42″ E. Thence in a S.E. direction to position Lat. 29° 02′ 45″ N., Long. 48° 09′ 47″ E. then in an Easterly direction towards Long. 48° 11′ 30″ E. and the Northerly limit 29° 10′ 00″ N. from the shore to 48° 11′ 30″ E.

FLAG: National flag of Kuwait is to be flown at foremast head during vessel's stay in port.

NAVIGATIONAL AIDS:

Current hydrographic information may be obtained by radio from the "Middle East Navigation Aids Service, Bahrain".

Lights and Fog Signals

A fog signal on the extreme South end of South Pier with characteristics of one 3-second blast every minute. Approx. position Lat. 29° 04′ 05″ N., Long. 48° 10′ 00″ E.

A fog signal situated on the North Pier with a characteristic of 2.5-second blast, 3-second silence, 2.5-second blast, 3-second silence, 2.5-second blast, 46.5-second silence, Approximate position 29° 07′ 24″ N., 48° 09′ 00″ E.

A fog signal situated on the Sea Island with a characteristic of 2×3 second blasts every 90 seconds. Approximate position 29° 06′ 48″ N., 48° 17′ 29″ E.

DOCUMENTS:

1. To obtain clearance inwards, following documents required by Agents:
   - (i) Ship's Register.
   - (ii) Safety Equipment Certificate.
   - (iii) Safety Radio Certificate.
   - (iv) Load Line Certificate.
   - (v) Last Port Clearance.
   - (vi) Two copies of Crew List showing names, nationalities and passport/seamen's book numbers.

Items (i) to (v) are returned to Master together with Port Clearance (valid 24 hours only) prior to sailing.

2. Customs boarding officers require following:
   - *(a)* One copy of Crew List.
   - *(b)* Log Books covering period from last visit.
   - *(c)* Completed Customs Declaration Form (supplied by boarding officer).
   - *(d)* List of Ports visited with arrival and departure dates since last visit (form also supplied by boarding officer).
   - *(e)* Completed Ballast Form (form also supplied by boarding officer).

3. Immigration officials require the following:
   - *(a)* Valid Passport or Seamen's Book – the latter is preferable for landing.
   - *(b)* Letter of Guarantee from Agents (iv above).
   - *(c)* Two copies of Crew Lists.

4. Early Departure Procedure. KOC Documents Section are now operating an Early Departure Procedure to cut down delays in documentation. Masters may opt to use this scheme, full details of which can be obtained from KOTC.

5. Discharge Certificates: Discharging certificates of oil cargo loaded from Kuwait and neutral zone ports are to be sent to vessels' local Agent immediately, duly attested by Customs authorities and Arab Consulate covering full quantity as per Bill of Lading.

If a vessel, which has not submitted the certificate for the previous voyage, calls for the second time, she will be allowed to load and sail only after paying a cash deposit of KD 2,000.

In order to avoid delay in berthing, loading and outward clearance for vessels, all owners must give instructions to Agent at discharging ports to forward relevant cargo discharge certificates to Agent at loading ports without delay.

PILOTAGE: Vessels should arrive with sufficient clean ballast for safe manoeuvring under prevailing weather conditions. Under certain conditions the Pilot, after consulting the Harbour Master, may require additional ballast to be run in before berthing.

All berthing, unberthing and manoeuvring of vessels within the port limits, restricted area and prohibited anchorage must be done under the supervision of a KOC Pilot.

It is the duty of the Master to inform the Pilot of any special conditions, difficulties, or peculiarities whatsoever pertaining to his vessel which might impose hazards in connections with the handling, mooring, unmooring, loading or discharging of the vessel.

ANCHORAGES: The suggested anchorages in the port of Mina-al-Ahmadi have been laid out to facilitate shipping in general. These anchorage areas are outside of the port limits and clear of the prohibited anchorage and restricted areas. Depths in the anchorages range from 10 to 15 fathoms, the seabed is of sand and soft coral with mud patches and affords good holding ground.

Incoming vessels are assigned berths by the Harbour Master in accordance with time of arrival, type of cargo required, size of vessel and loaded draft. Endeavour is made to berth vessels on arrival and Masters will be advised, prior to arrival, of the pier at which they will berth. If a berth is not available, vessels will be requested to anchor in one of the three anchorages as follows:

1. To the North-East of the Sea Island and outside of the restricted area.
2. To the East of the North Pier, outside of the port limits and to the North of the prohibited anchorage.
3. To the East of the South Pier, outside of the port limits and between the Southern limit of the prohibited anchorage and the Northern port limit of Shuaiba Port.

To the East of the port limits exists a prohibited anchorage and a restricted area which embraces the Sea Island and submarine-feeder pipe-lines.

Positions of these areas are:

Prohibited anchorage	29° 05′ 00″ N.		29° 05′ 00″ N.
	48° 11′ 30″ E.	to	48° 15′ 00″ E.
	29° 07′ 00″ N.		29° 07′ 00″ N.
	48° 11′ 30″ E.		48° 15′ 00″ E.
Restricted area	29° 05′ 00″ N.	to	29° 05′ 00″ N.
	48° 15′ 00″ E.		48° 20′ 00″ E.
	29° 09′ 00″ N.		29° 09′ 00″ N.
	48° 15′ 00″ E.		48° 20′ 00″ E.

HEALTH:

Vessels calling at Mina-al-Ahmadi are requested to radio the following information to "Health Minahmadi Port":

(1) Name of vessel
(2) Last port of call
(3) Health condition of crew
(4) Validity of Smallpox and Cholera Certificates
(5) Request for Free Pratique

Free pratique will be considered at the discretion of the Quarantine Officer, and vessels must hoist the yellow flag unless they are informed by Agent or Harbour Control that free pratique has been granted.

Regulations.

(i) All vessels must exhibit quarantine signals until quarantine formalities are completed or free pratique granted. By day, International Code Flag "Q"; by night, red light over white light. No person other than the Pilot is allowed to board any vessel either alongside pier or at anchorage until pratique has been granted.

(ii) Valid smallpox Vaccination Certificates for all crew members and passengers are required. Valid Cholera Certificates will be required from travellers coming from infected areas with the exception of children under one year.
(iii) Ratguards must be fitted to all moorings – this is being rigidly enforced.
(iv) Maritime Declaration of Health Form (supplied by boarding quarantine officer) to be completed.
(v) One copy of Crew List containing dates of vaccination and inoculation is required.
(vi) International Certificates of Vaccination and Inoculation to be available for inspection if required.
(vii) Details of air-conditioning available in vessel (form supplied by boarding officer).
(viii) A valid Deratisation Certificate must be produced. Facilities are available locally for renewal.

RADIO:

1. *Station:* All radio communications to the Company should be quoted in Greenwich Meantime and should be routed through Kuwait Coast Station 9KK, details of which are given below:

412G Al Kuwait (9KK) 29° 10′ 09″ N., 47° 45′ 42″ E.

Frequency			*Hours*
(9KK) 430*, 450, 500	A1, A2	2 kW.	0300–2100
(9KK2) 4,287	A1	0.75 kW.	On request
(9KK3) 6,370	A1	0.75 kW.	On request
(9KK4) 8,525	A1	0.75 kW.	0300–2100
(9KK5) 12,895	A1	0.75 kW.	0300–2100
2,182, 2,200, 2,750	A3	0.1 kW.	0300–2100

*On request.

Procedure: Transmits traffic lists on 450 kc/s. each even hour; 8,525 and 12,895 kc/s. each odd hour plus 35, listens for 30 mins. thereafter: 2,750 kc/s. each odd hour plus 05.

2. *ETA:* 96 hours before arrival Masters should transmit to Kuoco through Al Kuwait Radio (9KK) the following information required by Kuwait Oil Company.

1. ETA.
2. Cargo and Bunkers required.
3. Notice of any repairs which may immobilise vessel.
4. Any special requirements regarding cargo documents.
5. Max. loading rate and ballast discharge time, special loading instructions if any.

The ETA should be confirmed 24 hours before arrival. The Master should also provide Agent with following information prior to arrival:

1. ETA.
2. Last port of call.
3. Any sickness on board.
4. Number of crew members unprotected against smallpox.
5. Number of crew to see doctor or dentist.
6. All requirements – provisions, supplies, lubricating oils, repairs, stores, machinery for landing, crew repatriation, etc.

3. *Radio Beacon:* A low power radio beacon call sign "9KU" frequency 312.6 kc/s. is situated at Lat. 29° 04′ 13.4″ N., Long. 48° 08′ 27.5″ E. Code transmissions are repeated every 20 minutes commencing on the hour throughout the 24 hours as follows: 9KU repeated 3 times for a period of 20 seconds followed by a dash for 20 seconds alternately for a whole period of two minutes.

VHF: A short range VHF radio telephone Port Control system is in operation and continuous watch is maintained on International Channel 16. Port Working Channels are:

Channel	*Function*
11	General Port Working
12	Pilot and Tugs North/South Pier/Sea Island
13	Sea Island Loading
14	Pilot and Tugs North/South Pier/Sea Island
26	Public Correspondence
27	Public Correspondence

Vessels bound for Mina-al-Ahmadi should contact Port Control calling "Mina South Pier signal" on Channel 16 a few hours before arrival.

N.B As Channel 16 is reserved for Calling, Safety and Emergency, vessels should refrain from using this Channel unnecessarily.

NOTICE OF READINESS: *(a) Vessels Berthing Direct from Sea:* The vessel will be advised by VHF or signal lamp. "Berthing on arrival" and the "Notice of Readiness time" will be taken as the time the Pilot boards the vessel.

(b) Vessels Anchoring and Awaiting Berth: When a berth is not available, or in the absence of any communication from the shore the time of NOR is taken as the time the vessel anchors in the roads. Time of anchoring, together with position relative to South Pier Control, should be advised to the Harbour Master by VHF or through 9KK as soon as possible. All vessels at anchor are required to be ready to berth on receipt of one hour's notice from the shore; this notice will be given by VHF or lamp and vessels should ensure an efficient watch is maintained to receive this notice.

(c) Cancellation of NOR: If after receiving one hour's notice a vessel is not ready to berth when Pilot boards, at the expiry of that notice the original NOR will be cancelled and the Pilot withdrawn. The new NOR will be the time the vessel indicates to the shore that she has rectified the defect that originally prevented her from berthing. As vessels are normally berthed in strict order to NOR time a vessel could lose considerable time through not being ready, and Masters should ensure that delays of this nature do not occur.

TUGS: KOC maintain 6 diesel tugs for port use. 4×1,500 h.p. with a bollard pull of 24 tons, and 2×2,500 h.p. with a bollard pull of 30 tons. 4 tugs normally maintained on duty at all times. Hire charges for the services of Pilots, tugs and rope launches are covered by comprehensive port charges. Under normal operating conditions, no tug or other craft will come alongside the vessel before the Pilot boards; ship's personnel must not signal for tugs or other boats to come alongside.

MOORINGS: When at berth, vessels must be moored to entire satisfaction of Pilot. Vessels must be ready at all times to put out extra moorings as requested by pier personnel or dictated by weather changes.

Mina-al-Ahmadi is subject to sudden fierce squalls; winds of 70 knots have been recorded, therefore vessel's mooring lines must be checked frequently to prevent excessive movement of vessel in berth. Experience has shown that wholly synthetic moorings have too much elasticity and allow vessel to range or drift away from the berth during periods of adverse weather. Whilst these moorings are acceptable as head/stern ropes, it is felt that the ideal breast moorings should be of wire or a wire rope combination with the end being sent ashore fitted with a synthetic pennant or tail. This type of mooring provides the necessary elasticity while still being able to hold the vessel in position. All vessels moored with automatic tension winches must set the manual brakes on these winches.

BERTHING: Vessels can berth at any time of the day and night. Berths are allocated depending on shipping position and size of vessel and the berthing position is advised by VHF. All vessels must establish contact with Signal Station or Sea Island Control before anchoring to ascertain position indicating the NOR time. Vessels should remain at one hour notice for berthing at all times and maintain an efficient watch on VHF.

There are 2 piers, 6 buoy moorings (seaberths) and a Sea Island.

South Pier. The South Pier is connected to the shore by an approach trestle, this trestle leaves the shore in position 29° 04′ N., 48° 09′ E., and runs seaward in an 071° 26′ direction for a distance of 4,200 ft. (1,280 m.). The "T" head is formed by the oil pier running Northwards in a 341° 26′ direction for 2,805 ft. (655 m.) and the general cargo/oil pier running Southwards in a 174° 26′ direction for 1,076 ft. (328 m.). The pier is a steel piled structure with a wooden deck, 24 ft. above LWOST. The South Pier has 6 oil-loading berths, plus 2 berths which can be used for general cargo or L.P.G. loading; details of these berths are as follows:

Limiting Depths and Berth Lengths

Berth	*Depth at LWOST*	*Nominal Length*
1	48.0 ft.	660 ft.
2	47.0 ft.	675 ft.
3	47.0 ft.	705 ft.
4	50.5 ft.	765 ft.
5	41.5 ft.	765 ft.
6	43.5 ft.	705 ft.
9	44.0 ft.	615 ft.
10	49.0 ft.	1,050 ft.

All berths except Nos. 1 and 10 are equipped with 10 in. cargo lines and 8 in. bunker lines. No. 1 and 10 berths are equipped for loading LPG each comprising a 16 in. loading line and a 10 in. vapour return line and a 6 in. circulating line. No. 9 is only equipped for bunkers and dry cargo.

North Pier. The North Pier is situated 3.5 nautical miles North of the South Pier and connected to the shore by an approach trestle which runs seaward from 29° 07′ 04″ N., 48° 08′ 10″ E. in a direction of 071° for a distance of 4,754 ft. (1,449 m.); the head is formed by the oil pier which runs Northward in a direction of 341° for a distance of 2,304 ft. (702 m.). The pier is a steel piled structure with a wooden deck, 20 ft. above LWOST. The North Pier has 4 oil-loading berths details of which are:

Limiting Depths and Berth Lengths

Berth	*Depth at LWOST*	*Nominal Length*
11	59 ft.	1,008 ft.
12	58 ft.	1,296 ft.
15	57 ft.	792 ft.
16	57 ft.	740 ft.

Berths 11 and 12 each have 4×12 in. cargo hoses, 1×12 in. Chiksan arm for naphtha loading and 2×8 in. bunker hoses. Berths 15 and 16 each have a Chiksan loading unit consisting of 4×12 in. cargo arms and 2×8 in. bunker arms. To facilitate the connecting of hoses on Berths 11 and 12, North Pier vessels are requested to retain sufficient ballast so that their manifold height above zero ft. tide does not exceed 60 ft.

MAX DRAFT

Sea Island Terminal. The loading platform of this new terminal is located in position 29° 06′ 48″ N., 48° 17′ 29″ E., approximately 7.4 miles East of the North and South Piers. This terminal is a steel piled structure in 94 ft. of water (LWOST). It consists primarily of a central loading platform with control tower, 6 mooring and 4 breasting dolphins, all interconnected by catwalks. The terminal, which lies in 330°–150° direction, is some 1,620 ft. in length. The height above datum of the loading platform is 44 ft.

Control Room on this terminal is about 90 ft. above water level.

2 vessels can berth at the same time but loading is possible one at a time, and the crude oil is fed by a 48 in., and heavy fuel oil bunkers by a 20 in., submarine pipe-line from shore. Navigational lighted buoys lettered A, B and C have been installed to mark the run of these pipe-lines. Other than heavy fuel oil no other bunkers available. Light fuel, marine diesel are not available at the Sea Island Terminal. Therefore vessels berthing at Sea Island requiring light fuel oil and marine diesel should inform Sea Island Control prior to berthing to avoid any possibility of delays. Sea Island berths each fitted with 4×16 in. cargo lines and 2×12 in. bunker lines.

Sea Berths: These berths are no longer in use and the buoys and moorings have been withdrawn.

Manifold Loading Connection Sizes. North Pier cargo flanges are 12 in. and bunker flanges 8 in. standard 150# ASA. South Pier cargo flanges are 10 in. and bunker flanges 8 in. standard 150# ASA. Sea Island Terminal cargo flanges are 16 in. and bunker flanges 12 in. standard 150# ASA.

Reducers. All vessels using the port of Mina-al-Ahmadi, should be equipped with reducing spools to fit these loading connections. These fittings should be in place prior to berthing to help expedite the vessel's turn-around time.

Slops. A 6 in. slop-line is available on all berths on North and South Piers for reception of slops. For first 3 hours use of this facility is free, for each additional hour or part thereof, a charge is made. Reception of slops is necessarily slow and a vessel may be considerably delayed in having to pump slops ashore. Vessels are therefore expected to arrive with clean ballast and Masters are asked to certify that all tanks and lines have been thoroughly washed unless "load on top" techniques are being operated.

CRUDE/PRODUCT LOADING RATES: The following table shows the crude products available at each berth and the nominal loading rates:

Cargo	*Available at berths*	*Nominal t.p.h.*	*Maximum potential*
Crude Oil	Sea Island 20 and 21	15,000	
Crude Oil	11, 12, 15 and 16	7,200	12,000
Crude Oil	2, 4 and 5	3,800	7,000
Crude Oil	3 and 6	3,200	5,000
Crude Oil	1 and 10	2,800	2,800
Heavy Fuel Oil	11, 12, 15 and 16	2,000	
Heavy Fuel Oil	4, 5 and 6	2,700	
Heavy Fuel Oil	3	1,100	
Heavy Fuel Oil	1, 2, 9 and 10	500	
Light Fuel Oil	11, 12, 15 and 16	600	
Light Fuel Oil	3, 4, 5 and 6	1,100	
Light Fuel Oil	1, 2, 9 and 10	500	
Admiralty FO	3, 4, 5 and 6	1,200	
Diesel Oil	11, 12, 15 and 16	250	
Diesel Oil	1, 2, 3, 4, 5 and 6	500	
Diesel Oil	9 and 10	250	
Gas Oil	1, 3, 4, 5 and 6	1,500	
KLD	1, 2 and 4, 11 & 12	1,400	
PPO	1 and 2	300	
KNG	1, 2 and 4, 11 & 12	1,400	
Bulk-LPG	1 and 10	1,000	

Note: All blended cargoes containing crude oil as one of the components can be loaded at any berth.

FUEL: Heavy, light and diesel fuel can be supplied on all berths except the Sea Island, where only heavy fuel is available. Approx. Specifications:

	API	*Viscosity*	*Sulphur content*
Heavy Fuel	15.2–15.8	2,900–3,400	4.0 or less
Light Fuel	19.0–20.0	600	3.5 or less
Diesel Fuel	35.5–36.5	36	1.5 or less

LUBRICATING OILS: The stock of marine products of BP, Shell and Gulf Oil are maintained at Mina-al-Ahmadi and requests indicating the quantities are to be made in advance. All drums are to be handled during deballasting or before loading. Vessels will not be allowed to load more than 9 drums after loading unless under special circumstances and depending on shipping congestion. No bulk luboil delivery service available in Kuwait.

DRY CARGOES: Dry cargo vessels will either discharge into lighters in the anchorage or alongside South Pier at Berths No. 9 or No. 10, subject availability of berths.

Cargo Cranes. Portal cranes of 5 tons capacity on Berths 9 and 10, also a stiff-leg derrick with a lift of 54 tons on Berth No. 10A. However, vessels are expected to have their own cargo equipment ready for use in case this gear is required.

Explosives. Cargo vessels carrying explosives are not allowed alongside piers.

Barges. Company barges available for use in discharging dangerous cargoes or other cargo in the anchorage.

Stevedores. Agents will arrange stevedores to work cargo whilst KOC will provide launch, barge and shore labour.

THE ABOVE INFORMATION IS INCLUDED FOR INTEREST ONLY. IN JANUARY 1979 THE PORT AUTHORITIES AND K.O.C. (KUWAIT OIL CO.) ADVISED THAT DRY CARGO DISCHARGING NO LONGER PERMITTED BECAUSE OF THE CURRENT LPG PROJECT.

K.O.C. CARGO IS NOW BEING DIVERTED TO SHUAIBA ANCHORAGE WHERE DISCHARGING EFFECTED INTO BARGES EXCEPT DURING BAD WEATHER CONDITIONS WHEN VESSELS ARE BROUGHT ALONGSIDE IN SHUAIBA PORT.

MEDICAL: Patients will normally be treated at State Quarantine Clinic, where doctors are on duty between 0800–1200 hrs. and 1500–2000 hrs. daily. In emergencies doctors are available any time. Patients requiring hospital treatment will be transported by Agents to either KOC hospital in Ahmadi or to State hospital in Kuwait. Dental treatment can be arranged by Agents.

FRESH WATER: Fresh water is not normally available except in emergency cases but in the Summer it will be difficult to obtain. However, vessels must send in their requirements well in advance to ascertain possibility of supply from Shuwaikh anchorage. This will be subject to draft restrictions, deviation, delay depending on availability of suitable barges and previous port commitments to other shipping and additional port charges.

DEEP WATER DEPARTURE CHANNEL: A comprehensive survey was carried out to determine the route of the departure channel for the larger and deep draft vessels leaving the port of Mina-al-Ahmadi in a loaded condition. This channel is some 28 miles in length; it extends from the Sea Island Terminal to Madaira Reef and is marked by 21 light buoys and 2 light beacons, one established on Taylor Rock and the other on Madaira Reef. In addition to the above aids, Madaira Reef Light Vessel has been re-positioned further to the East and renamed Ahmadi to act as a fairway mark. Water depth in the departure channel is from 91 ft. to 100 ft. and above. Two shallow patches, one is about 9 miles from Sea Island with a minimum 91 ft. and the second is 14 miles from Sea Island with 92 ft. minimum water. Vessels which by reason of their draft are confined to this deep water channel and consequently hampered in their freedom to manoeuvre, will exhibit the following signals:

(i) *By day.* A black cylinder 4 ft. long by 2 ft. in diameter exhibited where it can best be seen.

(ii) *By night.* Four red lights vertically disposed spaced 3 ft. apart with an all round visibility of 4 miles exhibited where they can best be seen.

The exhibition of these signals in no way absolves any vessel from taking all appropriate action to avoid collision as required by the International Rules and Regulations for Preventing Collisions at Sea, but if a deep draft vessel is in doubt that an approaching vessel is not giving her sufficient room to manoeuvre she should indicate such doubt by giving at least five short and rapid blasts on her whistle.

Vessels having less draft should, when able to do so, give way to vessels exhibiting and sounding these signals and indicate this intention by giving one short blast followed immediately by 1 long blast on the whistle. Normal sound signals for vessels in sight of another should then follow.

Anchoring and fishing are forbidden within the deep water departure channel.

The departure channel is marked by the following buoys and beacons:

Number/ letter	*Type*	*Position N/Lat.*	*Position E/Long.*	*Character*	*Port star-board/ middle ground*	*Vis. (0.85) (miles)*
	Buoy					
1	200/3L	28° 57′ 33″	48° 46′ 18″	QK.FL.W	S	6.2
2	,,	28° 56′ 23″	48° 46′ 04″	IQFl.R	P	4.0
3	,,	28° 57′ 23″	48° 41′ 52″	FL.W.10	S	7.4
4	,,	28° 56′ 41″	48° 41′ 12″	FL.R.10	P	4.6
5	,,	28° 58′ 23″	48° 39′ 00″	FL.W.5	S	7.2
6	,,	28° 57′ 38″	48° 37′ 49″	FL.R.5	P	4.4
7	,,	29° 00′ 54″	48° 32′ 59″	FL.W.10	S	7.4
8	,,	29° 00′ 09″	48° 32′ 31″	FL.R.10	P	4.6
9	,,	29° 00′ 38″	48° 31′ 07″	FL.W.5	S	7.2
10	,,	29° 00′ 27″	48° 31′ 53″	IQFl.R	P	4.0
11	,,	29° 01′ 20″	48° 28′ 52″	FL.W.10	S	7.4
12	,,	29° 00′ 22″	48° 31′ 27″	FL.R. 5	P	4.4
13	,,	29° 02′ 18″	48° 25′ 34″	FL.W. 5	S	7.2
14	,,	29° 00′ 13″	48° 30′ 51″	Gp. FL. (3) R. 10	P	4.3
15	,,	29° 05′ 27″	48° 21′ 25″	QK.FL.W.	S	6.2
16	,,	29° 01′ 40″	48° 26′ 38″	IQFl.R	P	4.0
18	,,	29° 01′ 46″	48° 25′ 44″	FL.R. 5	P	4.4
20	,,	29° 01′ 53″	48° 24′ 50″	Gp.FL.(3) R.10	P	4.3
22	,,	29° 03′ 18″	48° 22′ 53″	FL.R.5	P	4.4
24	,,	29° 05′ 05″	48° 20′ 26″	FL.R.15	P	4.75
26	,,	29° 05′ 50″	48° 19′ 15″	IQFl.R.	P	4.0
A	,,	29° 05′ 38″	48° 11′ 30″	QK.FL.R.	MG	3.6
B	,,	29° 05′ 59″	48° 13′ 15″	QK.FL.W	,,	6.2
C	,,	29° 06′ 21″	48° 15′ 00″	QK.FL. R.	,,	3.6
Taylor Rock	Beacon	29° 01′ 20″	48° 34′ 33″	IQFL.W	—	7.3
Madaira Reef	Beacon	28° 56′ 03″	48° 46′ 22″	FL.R. 5	—	11.2
Ahmadi	Light vessel	28° 56′ 00″	48° 53′ 00″	FL.12 sec.	40 Ft.	11.0

CUSTOMS: Customs officials will board vessels to inspect log books to ascertain violation of Israeli Boycott Rules and seal the liquor bond during stay in berth. An accurate list of alcoholic drinks in *Bonded Store* only is to be presented to the officials sealing the bond and the seal is not to be broken until vessel leaves the port.

(i) Personal effects mainly required for personal use and not for re-sale or purpose of commercial gain are allowed free of duty. However, all other goods are subject to a 4% ad valorem duty (CIF value). Suppliers invoices and Certificate of Origin are required for clearance.

(ii) Importation and the sale of alcoholic beverages is strictly prohibited.

(iii) All goods for landing from tankers must be declared to boarding Customs Officer and necessary documentation completed.

(iv) Israeli goods, goods made by companies having interest or branches in Israel, Israeli vessels and vessels trading with Israel are boycotted and not allowed entry into Kuwait.

IMMIGRATION:

(i) Nationals of all friendly countries normally allowed to land. Israelis forbidden entry into Kuwait.

(ii) Transit visas should be obtained from Kuwait Embassies and Consulates abroad. However, in emergencies entry visas can be arranged at airport.

(iii) Transit passengers having valid connecting airline ticket to next port are allowed to land without visas up to 24 hours, extendable to 48 hours if required.

(iv) Seamen of all friendly countries normally allowed to land in transit to join vessels, without visas but on Agents guarantee. Advance information regarding names, nationalities, age, sex, etc. is required by Agents in order to facilitate reception and immigration clearance. *N.B.* Thursdays and Fridays are Company holidays.

(v) Seamen allowed to land for hospitalisation, repatriation, transfer, etc., on a written undertaking that all expenses are met by Agents on behalf of Owners.

(vi) Passports must be valid for Kuwait for citizens of all countries. Stateless persons are required to have a visa before arrival in Kuwait.

CONSULS: Most friendly countries maintain Embassies or Consulates in Kuwait Town.

TIME: Kuwait State bases local time on the 45th meridian (GMT plus 3 hours). This time is in force the whole year.

SERVICES: To avoid delay all vessels advised to cable Agent of all their requirements in advance, giving full details:

Repairs

(a) *Ship Repair.* All running repairs are undertaken through local contractors.

(b) *Radar/Radio and Electronic Equipment.* Maintenance service of this equipment is available through KOTC whose engineers/technicians are available for service on request.

Supplies. Supply of chemicals, paints, spare parts and provisions are available through local Agents.

Laundry. Laundry service is available on advance notice.

Oil Inspection. E. W. Saybolt & Co. maintain an independent inspection service.

Seamen Centre. This service is now centred only on South Pier, open to visiting seamen from 0700–2200 hrs. daily. Film exchange facilities are available at the South Pier.

Classification Societies. Lloyds Register of Shipping has a Resident Surveyor in Kuwait and maintains an office with Kuwait Maritime & Mercantile Co., who attend marine and non-marine work. Other societies have non-exclusive surveyors and their services can be obtained through KOTC.

Divers. Divers services are available, including underwater hull cleaning service, through KOTC.

SHORE LEAVE: Ship's personnel and passengers not permitted ashore for any purpose whatsoever until pratique granted. All shore leave is contingent upon compliance with quarantine regulations and, under limited conditions and hours, shore leave may be granted. Masters should consult Agents to obtain the necessary passes.

REGULATIONS:

(a) *Local laws.* The laws of Kuwait are in force at the port of Mina-al-Ahmadi. Masters and crew members are advised for their own protection to abide by them. Comprehensive regulations governing the use of the port are promulgated in Law No. 21 of 1961. Masters of visiting vessels should acquaint themselves with this law.

(b) *Pollution.* The State of Kuwait has stringent laws in force concerning the pollution of the sea by oil. The following are two amended paragraphs of this law:

Paragraph 1, Art. 4. "A person responsible for any pollution as described in Articles 1 and 2 shall be punished by a fine of not less than one thousand and five hundred and not more than six thousand Dinars. In the event of his committing a similar crime within a period of one year from the date of his conviction, such a person shall be punished by a fine of not less than three thousand and not more than six thousand Kuwait Dinars, and in the event of his committing yet another crime within a year from this last conviction he shall be punished by a fine of six thousand Kuwait Dinars".

Paragraph 3, Art. 6. "The person responsible for pollution may suspend the detention order against the ship on payment, as a cash guarantee, of six thousand Kuwaiti Dinars to the official entrusted with the execution of such order."

(c) *Certificates.* All vessels must comply with International Safety Regulations and ensure that ship's certificates, i.e. Safety Radio, Safety Equipment and Load Line are valid. Facilities are available for renewal or extension providing proper notice is given. At least 48 hours should be allowed *excluding* Thursdays, Fridays or other local holidays.

(d) Load Line Regulations are strictly enforced, vessels overloaded will not be allowed to sail and subject to lengthy delay awaiting suitable facilities for pumping ashore. No facilities for pumping cargo ashore from Sea Island are available.

(e) A Cargo Discharge Certificate for cargo loaded from Kuwait each voyage is to be presented to the Customs and Ports in Kuwait through the Agents within 4 months from sailing and these certificates are to be signed and stamped by local Customs officials and authenticated by an Arab Embassy or Consulate in the country of discharge.

PORT TAX: New tax introduced by the State of Kuwait at the rate of 45.25 fils (KD. 0.4525) calculated on ship's g.r.t. and outward clearance is subject to payment of their dues before departure.

Declaration of g.r.t. and n.r.t. details essential to avoid overcharge.

Early Departure Procedure:

EDP Cargo Documentation System is offered to all ships. Those vessels not accepting this system of documentation are unberthed to anchorage to await documentation and therefore subject to delay in sailing until documents are ready and delivered on board by launch. Weather conditions may prolong such delays on occasions.

AGENT: For all tankers loading/discharging or sundry errands on a sole agency basis. Address: Kuwait Oil Tanker S.A.K. (Agency Branch), P.O. Box Fahaheel No. 7055, Kuwait. Telex: 4201, 4202. A/B MINATANK KWT. Tel. 911753/5; 911758/9; 911811. Cables: "Minatank Kuwait."

KOTC Agency is also connected with direct short range telephone VHF system and continuous watch is maintained on Channel 16. Working channels are and can be reached by calling "Minatank". Channel 16, calling only. Channel 26, Agency working. Channel 27, Agency Working.

For dry cargo vessels: See "Shuwaikh".

MINA SAUD: 28.45 N. 48.24E. (See Plan Book)

LOCATION: Mina Saud located just South of Ras Az Zaur approximately 23 miles 244° from Madaira Light Vessel. Terminal connected to field and production centre at Wafra, 31 miles to N.W., by 16-in, and 10-in. oil pipe-lines, and 8-in. gas line.

The most conspicuous object at the terminal is the refinery flare, in position 28° 44′ 13″ N. 48° 23′ 19″ E. Other objects conspicuous to the navigator are: Northern Radio Mast, Lat. 28° 44′ 32″ N. Long. 48° 23′ 38″ E. surmounted by a fixed red light at night; Az Zaur Beacon 28° 44′ 28″ N. 48° 23′ 40″ E. a 30 ft. high frame exhibiting flash every 5 seconds.

OPERATORS: Mina Saud Marine Terminal operated by Getty Oil Company (hereinafter referred to as the Company) 7 days a week. Weather and other circumstances permitting, ships will be loaded, moored and unmoored at all hours of the day. Company representatives available at all times to discuss with Master any problems affecting vessel turnaround.

FLAG: All vessels required to fly Kuwait flag at foremast during daylight hours. Flags may be obtained from Agents.

APPROACHES: Vessels on passage direct to Mina Saud up Gulf should pass about 1 mile South of Madaira Reef light-vessel, thence make good a course of 242° to an anchorage off Mina Saud in 9 fathoms.

DOCUMENTS:

Ship's Manifest.
Bill of Health.
Crew List.
Clearance from Last Port.
Passengers Manifest, if any.
Store List.
Bonded Store List.

Agents are responsible for presentation of oil discharging certificate to Customs authorities as guaranteed by them. All cargo discharge certificates duly attested by Arab Consulate to be sent to the Agents directly.

Cargo documentation carried out by Terminal. Masters will greatly assist Terminal Staff by prompt provision of ship's tank ullages on completion of loading.

PILOTAGE: Vessels boarded by Mooring Master either on approach or at anchorage. Mooring Masters are Licensed Masters Foreign Going. They act in an advisory capacity to Master and have expert knowledge of local conditions.

Mooring Master will pilot the vessel into the berth, supervise the mooring and unmooring, and advise Master with respect to the connecting and disconnecting submarine hose. A ship's deck officer must be on the bridge at all times while ship is manoeuvring, and deck officer must direct ship's crew in all hose handling. During loading operations Mooring Master will act as Company's representative

ANCHORAGE: Centre of anchorage area recommended is in position 090° from Flare 4.3 miles, which has good holding ground with mud and sand bottom.

Prohibited anchorage area defined as follows: beginning at refinery flare 060° 3.5′ thence 180° 1.75′ thence 270° 3.0′ to refinery flare.

MAX. SIZE:

Guidance for Maximum Dimensions:

	Berth No. 1	*Berth No. 2*
LOA	800 ft.	1200 ft.
Beam	No limit	No limit
Max Sailing Draft	41 ft.	52 ft. (56 ft.*)
Max. d.w.t. (for full cargo) approx.	50,000†	approx. 140,000†
Min. depth in berth	43.6 ft.	55.8 ft. (48.5 ft. on inshore bar)
Min. depth on exit route	43.6 ft.	53.8 ft.

*Tidal loading to 56 ft. allowed in suitable conditions.

†Larger vessels are allowed for part cargo or bunkers providing other parameters are satisfied.

HEALTH: Vessels calling at Mina Saud are requested to include the following information.

(1) Name of vessel
(2) Last port of call
(3) Health condition of crew
(4) Validity of Smallpox and Cholera Certificates.
(5) Request for Free Pratique or details or any cases or suspected cases of infectious diseases during the last four weeks.

Free pratique will be considered at the discretion of the Quarantine Officer and vessel must hoist the yellow flag unless informed by Agent or Harbour Control that free pratique has been granted.

RADIO: W/T messages routed via Kuwait Radio, call sign 9KK on

500 kHz. Kuwait radio transmits traffic lists on 450 kHz at 25 minutes past every even hour and on 8525 kHz and 12895 kHz at 35 minutes past every odd hour.

VHF Service maintained by Mina Saud Marine. Listening on Channel 16 (156.8 mHz). Operating hours: 0700 to 1200 and 1300 to 1600 local time.

Masters are requested to advise ETA 72 hours before arrival Mina Saud, and to confirm this when 24 hours distant from the Port.

It will assist if the following information is passed to "Gettymar Mina Saud" before vessel's arrival.

Arrival draft and expected max. sailing draft.

Bunker fuel requirements in metric tons or U.S. bbls. at 60° F.

Cargo requirements in long tons or U.S. bbls. at 60° F.

Confirmation that only clean ballast is to be discharged and expected deballasting time.

ETA should be confirmed 24 hours before arrival.

When berthed at Mina Saud Contact with the shore is maintained by VHF R/T portable units supplied by the Company.

TUGS: None.

READINESS: Notice of Readiness will be accepted by Company within terms of Charter Party or Contract when known, otherwise during ordinary business hours, which shall be between 0700 and 1800 local time except on Fridays and Public Holidays.

Laytime to commence 6 hours after time of acceptance or upon commencement of loading, whichever occurs first, except that when Notice of Readiness received before 1600 hrs. local time the 6 hours shall be continuous, but if received after 1600 hrs. then such 6 hours shall be daylight hours, daylight hours for such purpose being between 0600 and 1800 hrs. local time.

If after giving Notice of Readiness, vessel is delayed in getting into berth or in loading, such delay shall not count as used laytime unless delay shall be due to default of Company. On completion of loading, laytime shall cease upon disconnecting cargo hoses.

Should Company Mooring Master be handed a Notice of Readiness out of business hours and before commencement of loading he will note it as "Received" at that time, for acceptance by the Company at earliest recommencement of business hours, or at time of commencement of loading, whichever shall be first.

If Notice of Readiness given after latest accepted nominated lifting date, laytime shall not commence before commencement of loading.

BALLAST: Vessels must have enough clean ballast to permit safe manoeuvring under any conditions.

Mooring Master will advise when ballast discharge may commence. Inspection of ship's tanks for suitability to receive cargo carried out by Mooring Master or by qualified petroleum inspectors if required.

GEAR: For handling 12 in. and 10 in. strings of hoses ship's derrick should have a minimum safe working load of at least 5 tons. Outreach overside should be at least 5 ft.

2 lengths of 1 in. diameter good quality rope each of 20 fathoms in length should be available for use as slip ropes for flexible hoses.

Reducers should be available for connection of hoses to ship's manifold and to ship's bunker line connection.

Company provides snub lines of manilla and wire rope for hanging off hoses.

In the event that ship's derrick gear is inadequate for loads required, a work barge can be made available. Charge for this barge, including positioning and personnel, is equivalent of 150 U.S. Dollars per hour (approx.).

BERTHING: There are 2 loading berths, each conventional multi-buoy moorings which are connected by a 20 in. submarine line for cargo and a 12 in. submarine line for bunker fuel. Each berth has two 12 in. cargo hoses, and a 10 in. hose for bunkers. Hose connections should be prepared for one 12 in.×150 ASA standard hose on forward side of manifold and one 10 in.×150 ASA standard hose on after side of manifold (10 in. hose is normally utilized for loading cargo after completion of bunkers).

In cases where bunker connection is forward of cargo manifold, (necessitating crossing of flexible 10 in. bunker hose over the top of 12 in. cargo hose) 10 in. cargo connection is prepared forward of 12 in.

The outer berth, 073°-2.6 miles from refinery flare, is equipped to take vessels of up to approx. 140,000 d.w.t. for full cargo. Larger vessels can be accommodated for bunkering only or part cargo. Max. draft allowed is 52 ft. In exceptional circumstances tidal loading to 56 ft. is allowed. See Appendix below.

Appendix A. Mina Saud Tidal Loading Procedure December, 1975: Assuming 1000 ft. ship has berthed. Starboard anchor between 150 ft. and 300 ft. South of starboard anchor marker and one ship's length (1000 ft.) inside, (Course make good 270°T). Starboard anchor ranged along bottom and port anchor let go when 11 – 12 shackles out on starboard. i.e. 1000 ft. West of starboard (allowing for slack). Vessel would be in berth with between 8 – 10 shackles on each anchor.

When letting go at HW with ebb tide and heaving port anchor. V/L should manage to remain in at least 16.4 m. charted depth, heading about 340°T with stern in line with, or to seaward, of manifold marker buoy.

Every effort should be made to pick up port anchor without slacking too much on starboard anchor. Ideally, last shot of port cable is dragged home whilst starboard cable is fairly tight, so that when port anchor is aweigh vessel swings to starboard and presents her port side to the ebb, thus regaining a mid berth position. (Sometimes necessary to put engines ahead in order to clear manifold marker hose buoys).

Pilot should endeavour to have vessel heading North when starboard anchor is aweigh. Vessel should then steam North or slightly West of North in order to maintain a distance of approx. 1000 ft. from starboard anchor marker buoy. Vessel should start turn to starboard (bearing in mind ebb tide) when abeam of starboard anchor marker buoy, and endeavour to turn on radius of about 1000 ft. with starboard anchor marker buoy at centre. A course of 66°T should be made good until deep water is reached. If this procedure is followed, the min. depth should be not less than 16.4 m. (chart datum).

Note: 16.4 m. exists in berth and on exit channel. Close attention must be paid to vessel's position, as depths of less than 16 m. are in close proximity to exit channel.

Vessel should finish loading cargo or bunkers at least three hours before HW. Thus ensuring maximum height of tide for bottom clearance plus ebbing tide for easier control. (Ebb tide usually commences 2 hours before HW).

Divers should be utilised to check clearance at LW or some convenient time before ship is committed to a tidal loading. (In case of tidal anomaly).

16.4 m. must be reckoned governing depth. (53.8 ft.) and "Alaska Getty" must never be loaded to max. draft unless it is certain that she will sail with at least 1.8 m. of tide above chart datum.

For other vessels calculate thus:-16.4 + height of tide then subtract 1 m. Result will be max. allowable draft (only if weather conditions are ideal).

eg. Alaska Getty
16.4
+ 1.8 ht of tide
18.2
1.0 clearance
17.2 allowable draft (56 ft. 05 in.)

It must be borne in mind that mentioned clearances are the absolute minimum that can be tolerated in ideal conditions.

Seismic survey indicates feasibility of dredging or burying pipelines should it ever be necessary and also indicates good anchor holding power potential throughout area. *End of appendix.*

The inner berth, 073°–2.0 miles from refinery flare, has a min. depth of 44 ft. at lowest low water and can accommodate vessels up to 800 ft. in length. Max. draft allowed is 41 ft.

MOORING: *(a)* Port is an open roadstead and ships must be prepared to use main engines, unmoor and leave at any time.

(b) Mooring and unmooring carried out during day or night, as required. Except mooring at Berth 1, during daylight only.

(c) Vessels moored to ebb tide stream at both inner and outer berths.

Resilience in mooring achieved by weight of clump anchor and catenary of chain cable. A quick release hook connects ship's ropes to the buoy.

(d) Both port and starboard anchors should be lowered clear of hawse pipes and ready for instant letting-go from brakes.

Spar buoys established to mark starboard and port anchor dropping positions.

(e) 9 good quality synthetic ropes should be flaked ready for running from the stern. After anchoring, as vessel proceeds astern in Berth, quarter lines are run by Company launch and secured to quick release hooks on quarter buoys.

(f) When securely moored in correct position for handling hoses, each anchor should have about 8 shackles out and it is advisable that tankers using these submarine berths be provided with not less than ten 15 fathom lengths of cable on each anchor.

(g) Masters are requested to ensure that power to deck machinery and sufficient seamen to operate it are immediately available at all times when in berth.

LOADING: Submarine line marked by permanent buoy at each berth, and marker buoys fitted to all hoses.

Recovery of flexible hoses is by fleeting with ship's tackle making use of beckets fitted to recovery chain.

"Ship's Stop" is invariable rule except in an emergency. Ship must give reasonable stand-by time to Mooring Master, 15 to 20 minutes, to alert Terminal staff on shore for closing gauges.

Loading rate at present averages 1,500 t.p.h. Max. 2,000 t.p.h.

MEDICAL: In emergency only. For normal cases, Agent arranges visit to Port Health Doctor.

FRESH WATER: Not available.

FUEL: Bunker fuel (Max. 1500 secs Redwood No. 1 equivalent to 180 Cst.) at loading berths through 12 in. submarine line with single 10 in. flexible hose, at Berth 1, and 10 in. hose at Berth 2.

FIRE PRECAUTIONS: Masters are responsible for enforcing "No Smoking" regulations for their vessels and Mooring Master will stop loading if he considers them to be inadequate or if they are not being obeyed. Smoking in Company craft in the berths is forbidden.

CUSTOMS: Alcoholic beverages strictly prohibited to be held out of bond. Master allowed to keep limited quantity in his cabin.

It is important to remind Owners and Masters that all goods, either landed or embarked, must be cleared by Agent through local Kuwait Government Customs.

Import of firearms and ammunition forbidden.

CONSULS: See "Kuwait."

REPAIRS: No regular repair facilities available. However, fully qualified divers are available from Terminal. Underwater cutting gear and welding equipment available.

Services of divers and equipment are available at rates to be arranged for the job and agreed by Superintendent of Marine and Terminal Operations, Mina Saud.

Repairs to main engines must not be carried out in the berth without permission of Superintendent of Marine and Terminal Operations. Normally vessels requiring to immobilise engines will be anchored well clear of other ships.

REPATRIATION: Crew changes normally effected through Kuwait.

Seamen arriving at Kuwait Airport to join vessels at Partitioned Zone ports can obtain transit visa at the airport, providing Agents have arranged to submit the necessary guarantee to the Immigration Authorities confirming that they are in transit and joining vessels in the Kuwait Sector of the Partitioned Zone. In order to meet the crew at airport and arrange transit visa, cables confirming their arrivals and flight numbers are to be sent to Agents to reach them at least 24 hours before the arrival of the crew.

Marine Superintendent of Owners, or Owner's representatives and businessmen visiting Kuwait must have valid visas. Such visas can be obtained from Kuwait Government's diplomatic missions aboard.

TIME: GMT plus 3 hours. Permanent.

WEATHER: In Summer months of June, July and August light to moderate Northerly and North-westerly winds are general rule at Mina Saud. Occasional strong N.W. winds of Gale force. Strength and duration governed by strength of S.W. monsoon blowing outside the Gulf.

During Autumn and early Winter months fine weather is generally experienced associated with moderate N.E. monsoon prevailing outside the Gulf. Occasional 'Shamals' (N.W. winds) occur.

In late Winter period and Spring, strong S.E. winds with moderately heavy seas frequently experienced at Mina Saud. These are due to approach of low pressure systems from Atlantic and Mediterranean Sea spreading Eastwards across Levant and Iraq.

TIDES: Tide cycle is combination of diurnal and semi-diurnal tides giving a Higher High, Lower High, Higher Low and Lower Low waters during a 24 hour period.

Range of tide is average 7.5 feet at Springs and 5 feet at Neaps.

Commencement of ebb stream (direction 190°) after High water may be taken as 2 hours before predicted time of High water at Mina Saud published in Admiralty Tide Tables.

Main direction of flood and ebb streams are 010° and 190° respectively. Direction is extremely variable between Lower High Water and Higher Low Water period. Average direction during this period about 045°.

Tides subject to meteorological conditions and may be affected in height by more than 3 ft. in extreme circumstances. Times of High and Low water may also be considerably affected.

The Mooring Masters have access to information from the Marine Meteorological Station at Mina Saud.

STORES: Provisions and stores are available from Kuwait. Requirements should be arranged with Agents through Kuwait Radio prior to arrival at Mina Saud.

SHORE LEAVE: Can be arranged through agent.

AUTHORITY: Getty Oil Company, Mina Saud.

AGENTS: See "Shuwaikh."

Communication is by road by personal visit of agency staff. Distance about 50 miles.

SHUAIBA: 29.02 N. 48.08 E. (See Plan Book)

PORT LIMITS: Shuaiba port limits defined as follows:

North: This separates port of Shuaiba and Mina-al-Ahmadi and is defined by the point of intersection of the coast line with Lat. 29° 02′ 50″ N. in an Easterly direction until it intersects Long. 48° 09′ 42″ E. Thence in a South-easterly direction to the intersection of Lat. 29° 02′ 45″ N. and Long. 48° 09′ 47″ E. Thence in an Easterly direction along Lat. 29° 02′ 45″ N. seawards to Long. 48° 15′ 07″ E.

East: Long. 48° 15′ 07″ E.

West: Coast line.

South: This separates port of Shuaiba and Mina-al-Abdullah and is defined by the point of intersection of the coast line with Lat. 29° 01′ 45″ N. Extends due East till Long. 48° 09′ 59″ E. and runs on 45° direction to Lat. 29° 02′ 00″ N. then due East on that line until Long. 48° 15′ 07″ E.

All vessels within Port Limits should fly their national flag at the after part of the vessel and the Kuwaiti national flag at the fore.

DOCUMENTS: 10 copies of Cargo Manifest (3 copies duly signed by Agent at loading port) and one copy each of hatch list and stowage plan. Also 2 copies of Crew List to be presented to Customs Office.

N.B. A copy of complete set of Inward Manifests and a copy of the Stowage Plan covering cargo for discharge at Shuaiba has to be passed to Authorities by Agents at least 24 hours before vessels expected time of arrival, otherwise berthing likely to be delayed.

PILOTAGE: Pilotage is compulsory and requests for Pilots should be made to Shuaiba Port Communications Centre (call sign "Shuaiba Port" on Channel 16).

ANCHORAGE: Lat. 29° 02′ 24″ N., Long. 48° 12′ 18″ E. Depth is 18.5 m. with good holding ground.

MAX. SIZE: See "Berthing".

HEALTH: Vessels calling at Shuaiba are requested to send the following information to "Health Shuaiba Port".

(1) Name of vessel
(2) Last port of call
(3) Health condition of crew
(4) Validity of Smallpox and Cholera Certificates
(5) Request for Free Pratique

Free pratique will be considered at the discretion of the Quarantine Officer, and vessels must hoist the yellow flag unless they are informed by Shuaiba Port Communications Centre that free pratique has been granted.

RADIO: Submit ETA well in advance and confirm ETA 24 hours before arrival to Agents or Harbour Master through Radio Kuwait (9KK). When within range ships should contact Shuaiba Port Communications Centre ("Shuaiba Port") on Channel 16. The Port Communications Centre maintains a 24 hours watch on Channel 16 and will allocate either Channel 13 or 9 as a working frequency. ETA's should contain details of arrival draft.

TUGS: 3 tugs of 2,100 h.p. are available. The use of tugs is mandatory whenever directed by the Pilot or Harbour Master.

BERTHING:

The port consists of 3 main parts as follows:

Main Cargo Quay Mole: Permits berthing of ships on both sides. The Eastern side consists of 2 berths Nos. 4 and 5 having a total length of 350 m. The Western side consists of 3 berths: Nos. 1, 2 and 3 having a total length of 500 m.

Berth No. 1	maximum allowable draft	8.4 m.
Berth No. 2	,, ,, ,,	9.75 m.
Berth No. 3	,, ,, ,,	10.67 m.
Berths No. 4 and 5	,, ,, ,,	6.7 m.

Usage of berths 4 and 5 is restricted to good weather conditions only.

Small Craft and Barge Harbour: Situated South-west of the Main Cargo Quay Mole and comprising 3 berths accommodating vessels of less than 4 m. draft:

(i) Berth No. 1	Length	100 m.
(ii) Berth No. 2	,,	200 m.
(iii) Berth No. 3	,,	175 m.

Berth No. 3 is reserved for fishing vessels.

Oil Pier: Situated in deep water to the East of the main cargo quay mole and is connected to the Main Quay by an approach pier of 1,000 m. length. The Oil Pier consists of 4 berths, Nos. 1 and 3 on the North-easterly face of the Oil Pier, Nos. 2 and 4 on the South-west face. Dolphins are situated at the Northerly and Southerly ends of the Oil Pier to facilitate the berthing of larger tankers without difficulty. Oil products such as fuel oil, marine diesel, kerosene, aviation fuel, naphtha and gasolene can be loaded. Liquid ammonia can also be loaded at the Oil Pier.

Tankers of the following lengths and drafts can be accommodated at the Oil Pier as follows:

Oil Pier No. 1 up to 300 m. in length, draft 13.71 m.
Oil Pier No. 2 up to 213 m. in length, draft 12.19 m.
Oil Pier No. 3 up to 300 m. in length, draft 13.71 m.
Oil Pier No. 4 up to 213 m. in length, draft 12.19 m.

Tankers of more than 300 m. in length, but restricted to a draft of 14.02 m., will be considered by the Authority but strictly on a case-by-case basis.

The allocation of berths is at the sole discretion of the Port Manager.

The Harbour Master's Office, Port Communications Centre, Customs, Immigration and Port Health are all situated at the Main Cargo Quay Mole.

SHORE FACILITIES: Main Cargo Quay Mole: Berths 1, 2 and 3 are equipped with 5 travelling electric cranes of 3 and 5 tons capacity.

All berths are fitted with bunker lines for fuel and fresh water.

STEVEDORES: Stevedores will be provided by ship's Agent. Vessels will be required to maintain a minimum daily tonnage dependent on the type of cargo they are carrying.

Permission for the landing of heavy lifts on the quay must be obtained from the Port Manager each time in advance. On the quay pieces up to 300 tons have been discharged.

MEDICAL: Advance notice required if medical attendance needed on board.

DENSITY: 1025.

FRESH WATER: All berths fitted with fresh water connections and a fresh water barge will shortly be available. Vessels can obtain water according to requirement.

FUEL: The Kuwait National Petroleum Co. KSC, Kuwait, supply marine fuel and diesel oil at cargo wharves and oil jetty at Shuaiba. Specifications as under:

	FO 1500	*FO 600*	*MDO*
Ash % wt. max.	0.5	0.5	0.01
Pour point ° C (° F.) max.	10 (50)	2 (50)	2 (35)
Specific Gravity 60/60 ° F max.	0.99	–	–
Sulphur % wt. max.	3.8	3.5	1.8

Bunker nominations may be arranged through Kuwait National Petroleum Co. (U.K.) Ltd., 25 St. James Street, London S.W.1: cables: "Kunpetco", London S.W.1. Telex: 261998 or KNPC, PO Box 70 Safat, Kuwait. Telex: KNPC 2006 KT, KNPC 2689 KT and KNPC 2457 KT. Tels: Kuwait 449400, 443486, 437427. At least 3 days notice required.

Facilities on main quay mole for bunker fuel, gas oil and marine diesel oil in berths 1 through 5. No barges.

DEVELOPMENTS: The Port of Shuaiba will be extended by adding another finger pier and a marginal berth. The first phase, starting from December, 1976, will consist of a marginal multi-purpose berth and three finger berths. Water depth for all berths will be 14 m.

The extension consist of a piled trestle of 108 m. in length which incorporates a mooring dolphin, a piled berthing structure of 282 m. in length providing one berth on its seaward side for tankers of max. 13.7 m. draft and one berth on its landward side for tankers of max. 12.8 m. draft and a piled trestle and mooring dolphin at the Southern end of 56 m. in length.

GANGWAY/DECK WATCHMEN: Watch to be maintained by ship's crew.

OPENING/CLOSING HATCHES: Opening and closing of hatches normally carried out by stevedores on liners, and by ship's crew on charter vessels.

CERTIFICATES: All usual documents such as:

Ship's Manifest.
Crew List.
Clearance from Last Port.
Passenger Manifest.
Store List.
Bonded Store List.
SOLAS Certificates.
Bill of Measurements, etc.

CUSTOMS ALLOWANCES: Tobacco. No restrictions. Wine and/or Spirit. Alcoholic beverage strictly prohibited to be held out of bond. Master allowed to keep limited quantity in his cabin.

IDENTIFICATION CARDS: Passport or seamen's book necessary.

CONSULS: See "Shuwaikh".

REPAIRS: Small repairs can be arranged if sufficient notice is given.

DRY DOCK: No dry dock available.

REPATRIATION: Can be arranged. Entry visa regulations have been enforced in Kuwait, and the following is roughly the procedure in respect of crew changes.

1. Seamen arriving at Kuwait Airport to join vessels at Kuwait and Partitioned Zone ports can obtain transit visa at Airport if Agents arrange to submit necessary guarantee to Immigration Authorities confirming that they are in transit and joining vessels calling at Kuwait and/or Partitioned Zone. Agents meet crew at airport and arrange transit visa, cables confirming their arrivals and flight numbers are to be sent to Agents to reach them at least 24 hours before arrival of crew.

2. Marine Superintendent of owners, or owners' representative and businessmen visiting Kuwait must have valid visas. Such visas can be obtained from Kuwait Government's diplomatic missions abroad.

TIME: GMT plus 3 hours.

HOLIDAYS: New Year's Day (1st January), Kuwait National Day (25th February). The following Islamic holidays are celebrated but dates are subject to alteration: Prophet's Birthday, Prophet's Ascension, Eid Al Fitr, Eid Al Haj and 1st Muharram.

TELEPHONES: Telephone sockets fitted on North side of Main Quay Mole for convenience of vessels requiring a telephone on board.

SPECIAL SERVICES: The services of Classification Society Surveyors, Tank Cleaning Operators, Compass Adjusters, Divers and Underwater Cleaning and D/F Calibration Adjusters are available in the area.

SHORE LEAVE: Permitted.

PORT REGULATIONS: The following are excerpts of some of the more important port regulations:

Fire fighting appliances to be kept in readiness for immediate use.

Pumping or discharging in any way into the sea oil fuel tanks, bilges, dirty ballasts, etc., is prohibited.

Disposal of garbage over the side of the ship into the harbour is prohibited.

The presence of a Pilot on board a vessel shall not relieve the Master of his responsibility regarding the safety of the vessel. The Port Authority shall have the right to claim against a vessel for any damage caused by that vessel to berths, shore installations, tugs, buoys, etc.

The Harbour Master or his deputy may order a vessel to leave the berth at short notice in the case of emergency, bad weather, etc.

Vessels carrying explosives or dangerous cargoes must declare quantities and categories of same when they report their ETA.

Crew members are prohibited from swimming within the harbour.

Lowering into the water of ship's life-boats, launches or life-rafts is prohibited without the written approval of the Harbour Master or his deputy.

Mooring of ship's life-boats, launches or life-rafts to navigational marks and buoys is prohibited.

Due regard shall be given to the safety of divers when they are working within the Port Limits. Engines should be stopped when approaching their working area at a circle of 150 m. The launch attending divers displays the International flag letter "ABLE" during diving operations.

AGENT: For dry cargo vessels only: International Shipping Agency Limited, POB Safat No. 20637, KIC Building, 1st Floor, Safat Square, Kuwait, State of Kuwait. Tel. 441860 to 441862. Telex: 2208 (answerback "Isaship KWT") and 2396 (answerback "ISATUG KT"). Cables: "Shipagent, Kuwait").

In the case of tankers agency services are provided by the Kuwait Oil Tanker Company.

SHUWAIKH (Kuwait Harbour): 29.21 N. 47.56 E.

(See Plan Book)

PORT LIMITS: According to the General Port Rules (1959) the Seaward Limits comprise all waters in the area confined by line drawn in direction 000° from Ras Al Ajuza, (Lat. 29° 23′ 27″ N., Long. 48° 00′ 24″ E.) to the parallel of Lat. 29° 30′ 00″ N. Hence in direction 230° to Ras Al Ashairij Lat. 29° 23′ 15″ N., Long. 47° 51′ 00″ E. For the seaward boundaries of the Port within which a vessel is considered to be on "arrived ship", refer to "Anchorage".

DOCUMENTS:

Customs:

2 Copies of Crew List and passengers, with their nationalities.
1 copy of Store List.
1 copy of Crew Personal Property List.
Deck Log Book (if vessel calling first time, then all the log books which are available on board).
1 copy of Customs form (which will be given by Customs).

Immigration:

2 copies of Crew List with their nationality.
2 copies of Passenger List (if passengers on board), with their nationality.
All seamen's books or Crew/Passengers Passports.
A certificate signed by the Master, stating that there are no Stowaways on board.

Quarantine:

1 copy of Crew List.
1 Copy of Vaccination List.
All Vaccination Books.
1 set Quarantine Forms (which will be given by Quarantine Officer).

Port Clearance:

Ship's Registry.
Load Line.
Safety Equipment Certificate.
Safety Radio Certificate.

Port Surveyor:

Valid Liferaft Certificate (with annual renewal and survey).

Co-ordination Office: The listed documents below, should be handed to the Co-ordination Office, at least 48 hours before the ship's arrival.

6 copies of the Cargo Manifest, 3 copies duly signed by the Agent at loading Port.
1 copy of the Cargo Stowage Plan.
2 copies of Cargo List, in detail.
2 copies of Dangerous Cargo List.
1 copy of Transit List.

PILOTAGE: Pilotage service available and request for Pilot should be made to Port Signals Station, or to look-out Signal Station when in use. Ships proceeding through the dredged channel to Shuwaikh are boarded by the Pilot in the anchorage. Pilotage not compulsory in the outer anchorage.

ANCHORAGE: Ships may take up anchor berth in the outer anchorage, without the Pilot.

Because of congested anchorage, and for the benefit of all concerned, the outer anchorage (BA Chart 1214) was divided in the areas, and the approach waterway of three quarters of a mile in width from Ras Al Ardh to anchorage and vice versa, is left free for navigation.

Ships bound for Kuwait, in order to *discharge their cargo* should anchor in the area marked by the following co-ordinates, and in the depth of water, according to their drafts.

Lat. 29° 25.0′ N.	Long. 47° 58.7′ E.
Lat. 29° 27.0′ N.	Long. 47° 58.7′ E.
Lat. 29° 27.0′ N.	Long. 48° 02.5′ E.
Lat. 29° 25.0′ N.	Long. 48° 02.5′ E.

Ships which have *no cargo* for Kuwait, and calling only for fresh water, provisions, crew changing, transhipments or any other reason, but discharging cargo, should anchor:

North of Parallel 29° 25.0′ N. and East of meridian 48° 03.0′ E.

If mentioned anchorage area described is congested the ship could take temporary anchorage:

North of Parallel 29° 24.0′ N. and East of Meridian 48° 05.5′ E.

But change their position to the area described, immediately as opportunity occurs.

The ship should leave the anchorage immediately after they have received the facilities, and proceed to the anchorage of the Port, they are bound for.

Ships which have received instructions of possibility of berthing in the morning, should change their position to the area reserved, marked by the following co-ordinates:

Lat. 29° 25.0′ N.	Long. 47° 57.6′ E.
Lat. 29° 27.0′ N.	Long. 47° 57.6′ E.
Lat. 29° 27.0′ N.	Long. 47° 58.7′ E.
Lat. 29° 25.0′ N.	Long. 47° 58.7′ E.

When the movement is confirmed the vessel should hoist:

By Day: "G" Flag over a Black Ball or Shape.
By Night: A White Light over a Red Light, visible all round.

Note: (1) The Master shall advise the Harbour Master and/or the Pilot for any damage or disability to the ship under his command, *before berthing.*

Ship unable to comply with the berthing instructions, should notify the Harbour Master in ample time of their inability to do so, by VHF, Visual Signals or via Kuwait Radio:

500 kHz 9 KK 4 – 6381 kHz
450 kHz 9 KK 6 – 8525 kHz

Any ship sailing from the outer anchorage for any reason, should notify the Kuwait Harbour Control that she is sailing and give the reason *and not adhering to any instructions from the Agent.*

The Area North of Parallel 29° 25.0′ N. and West of Meridian 47° 57.6′ E., is reserved for ships of *National*

Fleet, who require repairs, waiting for orders, changing the crews, etc.

(2) The Harbour Master may direct any vessel to move from one berth to another, or vacate a berth as circumstances demand.

(3) a. A ship whose turn is defined in the Morning Meeting, and whose Agent is notified, and upon calling her no reply is received shall be prohibited from her turn for *3 days*, and after its elapse will be given another turn.

b. A ship which is defined as a temporary one on the record in the Morning Meeting, and upon calling, is not ready shall be prohibited from taking her turn for *2 days*, after which it will be given a normal turn.

c. A ship which is registered and then sails, if she delays her return for her specified turn for berthing will be prohibited for *15 days*, as delay penalty.

MAX. SIZE: Max. draft at berths Nos. 1 to 8, 31 ft. 6 in. (32 ft. at Spring tides), and 27 ft. at dolphins. These drafts allow 2 ft. of water under the keel. Tidal range is about 2.8 m. (9 ft.). Berthing draft dependent upon tidal conditions at time of arrival, and vessels exceeding 27 ft. have to wait for tide.

HEALTH: Vessels calling at Shuwaikh Port must send the following information to "Health Port Shuwaikh" by cable:

(1) Name of vessel
(2) Last port of call
(3) Health condition Crew members
(4) Validity of Smallpox and Cholera Certificates
(5) Request for Free Pratique

Vessels arriving at outer anchorage must hoist Q Flag, and keep it hoisted until Free Pratique is granted.

Free pratique will be granted usually at anchorage, and in some cases alongside, at the discretion of the Quarantine Officer.

No person, except the Pilot, shall board the vessel, before Pratique is granted.

RADIO: *Signal Station:* (Call Kuwait Harbour Control)

There is Lookout Signal Station at Ras Al Ajuza (Lat. 29° 23.3' N., Long. 47° 59.8' E.) and a Port Operation VHF/RT Service at the same position. The VHF/RT is a Single Frequency Simplex Service, operating in Channel 13 (156.650 mc/s), 12 (156.600 mc/s) and 11 (156.550 mc/s) working restricted to messages relating to the Movements and Safety of Ships.

All Vessels arriving, should establish contact with either one of these Stations as soon as possible by VHF or Visual Signals:

Tel: 443788 – 435873 Telex: 2733

Kuwait Coastal Station (9 KK) operates from 0600 hrs. up to 2400 hrs.

Radio Station:

2182 kHz	8802.4 kHz
2765 kHz	13182.5 kHz
2750 kHz	17328.5 kHz
4434.9 kHz	22699.0 kHz
6518.6 kHz	

Radio Telegraphy – 9 KK:

9 KK	9 KK 2 — 4299 kHz
500 kHz	9 KK 4 — 6381 kHz
450 kHz	9 KK 6 — 8525 kHz
	9 KK 8 — 12895 kHz
	9 KK20 — 12925 kHz
	9 KK22 — 16995 kHz
	9 KK23 — 22304 kHz

For Kuwait: Only English and French languages are accepted, for the other countries all languages are accepted.

Charges per word for Kuwait
QSJ CC 50 ctm.
LL nil
Telex: 2230 Tel: 449151 – 449157

Marine Communications

This Service links the ship directly with their Agent or Principal in Kuwait and the Call for this Branch is "Kuwait Maritime".

The "Kuwait Maritime" Service covers all the ship's calls with Kuwait and abroad.

The procedure is as follows:

Agent to Ship

Call by telephone No. 108 Kuwait Maritime, asking for connection, giving the Name of the Ship, and her Call Sign.

The Kuwait Maritime operator will contact the ship for you on Channel 16 (156.800 mc/s) and then transfer to vessel's frequency for communication.

Ship to Agent or Abroad

Call "Kuwait Maritime" on VHF Channel 16 (156.800 mc/s) and ask to be connected to Agent or abroad.

HARBOUR MASTER'S REQUIREMENTS:

Masters of all vessels calling to Shuwaikh Port (Kuwait) are requested to notify the Harbour Master by cable, 24 hours prior of their arrival via Kuwait Radio, in addition to their ETA and draft, the following:

Ship's Discharging Gear in order (most important).

Cargo which cannot be handled by Ship's Gear (if any).

Any Explosives, Inflammable or Hazardous Cargo.

If such cable is not received a questionnaire issued by the Harbour Master, should be duly filled and signed by the Master of the vessel, prior to berthing, which will be presented by the Ship's Agent, after the "Free Pratique" is granted.

This could cause delays in List Turn.

When approaching "Anchorage" the vessel should hoist the ship's "Call Sign" and "Quarantine Flag".

Masters should advise the Harbour Master of any special damage of disability to the ship under his command before berthing. A ship when entering or navigating the Dredged Channel, shall have both anchors ready for immediate use.

REGISTRATION PROCEDURE: (To register turn for berth, before proceeding to another Port).

On arrival at Kuwait Anchorage, Master to contact Kuwait Harbour Control by VHF or Visual Signals stating his wish to register.

The vessel should not leave until the registration is confirmed by Kuwait Harbour Control, which accepts registration 24 hours a day.

A stowage plan and manifest must be shown to the Port Authority before Registration.

TUGS: Join vessel entering dredged channel, Tug's lines used. The use of tugs by ships manoeuvring within Shuwaikh port limits under direction of Harbour Master or Pilots. Number of tugs used for each movement: *(a)* 2 tugs for ships exceeding 400 ft. in length. *(b)* 1 tug for ships between 250 ft. and 400 ft. in length.

6 tugs available, 2 of 750 h.p., 1 of 1,000 h.p. and 3 of 1,400 h.p. Use of tugs is compulsory.

BERTHING: The present Port consists of 18 deep water wharfs each 190–200 m. long.

14 of these berths have −10 m. depth (B.A. Chart Datum), and remaining 4.0 – 8.50 m.

2 dolphin berths with depth alongside of −8.50 m. below B.A. Chart Datum, and capable to take ships up to 185.0 m. in length.

3 shallow berths with depth alongside of 6.65 m. below B.A. Chart Datum, and capable of taking ships up to (1 × 121 m. and 2 × 195 m.).

Ships may under certain circumstances and at the Port Authority discretion, divert to Shuaiba Port, during the congestion periods.

There are 3 basins known as:—

Small Craft Harbour:	431.58 m. × 91.43 m.
Yacht Basin:	76.19 m. × 76.19 m.
Maintenance Basin:	118.86 m. × 82.90 m.

The entrance to Small Craft Harbour and Yacht Basin is 60.95 m., and to Maintenance Basin is 41.45 m.

These Basins are dredged to a depth of −3.35 m., and are used at present mainly by Barges, Tugs, Launches, Yachts, Security Boats and Navigational Aids Craft.

Berth turn is decided at a port meeting, held in the morning on all port-working days. With the exception of the dolphin berths, berthing takes place any hour, day or night.

1. Notification of vessels arrival. According to port regulations a questionnaire issued by the Harbour Master, duly filled in and signed by the Captain of the vessel, is to be submitted to the port prior to berthing. In many cases vessels arrive and obtain berth immediately and thus there is no possibility of presenting the questionnaire to Authorities in time. In order avoid berthing delays Masters should cable following information to the Harbour Master directly, 48 hours before arrival:
   (a) ETA.
   (b) Total cargo for discharging Kuwait.
   (c) Distribution quantity each hatch.
   (d) Declaration hazardous, inflammable and explosives cargo, and guns and ammunition.
   (e) Declaration all vessels winches in good working condition and cargo clear for discharging at Kuwait.
   (f) Draft fore and aft.

We quote below specimen cable covering the above:

"Vessel XXX ETA Kuwait 21/8 0600 local quantity discharging 1,400 tons general hatch one 300 hatch two 300 hatch three 250 hatch four 300 hatch five 250 no hazardous, inflammable explosives guns ammunition stop All winches derricks good working condition draft fore 24 ft. Aft 27 ft.".

The above cable sent to the Harbour Master will facilitate berthing vessel on time. ETA to be reconfirmed before 24 hours, if any change.

2. Vessels with a cargo of up to 400 measurement tons will be given priority alongside pier.
3. Vessels carrying up to 500 tons weight will be given priority to discharge at the buoys providing heavy lifts do not exceed 20 tons, or vessel does not carry reefer cargo.
4. A vessel that intends to stay in the anchorage in Kuwait until her turn will be allowed to shift over-stowed cargo while waiting.
5. Liners carrying cement in bags will still be considered as liner ships. Thus they will not be taken out to wait their turn at the cement berth.

CRANES:

Berth		*3 Tons*	*6 Tons*	*Grain Elevator*
No.1	General Cargo	3	1	—
No.2	General Cargo and Grain	3	1	Discharging Rate 150 t.p.h.
No.3	General Cargo and Fuel	3	1	—
No.4	General Cargo	3	1	—
No.5	General Cargo	3	1	—
No.6	General Cargo	3	1	—
No.7	General Cargo	3	1	—
No.8	General Cargo and Passengers	3	1	—

Floating Crane: A self propelled Floating Crane 100/25 tons capacity is available, and could be hired on request.

At 10.5 m.	100 tons
At 12.5 m.	80 tons
At 16.5 m.	60 tons
At 20.5 m.	40 tons
At 23.5 m.	35 tons
At 25.0 m.	25 tons

Total Jib's length is 47 m., less 3.3 m. base.

Maximum weight to be loaded on the crane platform is 200 tons at one time but this depending on availability of space.

Draft at full equipped condition is 1.8 m.

Berth	*3 tons*	*6 tons*	*30 tons*
No. 9 General Cargo	3	1	—
No. 10 General Cargo	3	1	—
No. 11 General Cargo	3	1	—
No. 12 General Cargo and Containers	3	1	
No. 13 General Cargo and Containers	3	1	Container Handling Crane
No. 14 General Cargo and Ro-Ro	3	1	—
No. 15 Perishable Goods	4	1	—
No. 16 Refrigerated Cargo	2	—	—
No. 17 Refrigerated Cargo and Cattle	2	—	—
No. 18 Cattle and Transhipment	2	—	—

Maximum Loads on Wharves:

Berth No. 1	3 tons per sq.m.
Berth No. 2-8	600 lbs. per sq.ft.
Berth No. 9-18	3 tons per sq.m.
Fishing Piers	1.5 tons per sq.m.

STEVEDORES: Aboard ship will be provided by the Agent. Labourers in barges and ashore will be provided by the Port of Kuwait but under ship's responsibility as for breakage, pilferage, etc.

Working Hours: 0600-1300, 1500–2230; Overtime 1300-1500, 2200-2400 hrs. Overtime is compulsory for all vessels. On Fridays, only work on vessels which are to be completed during the day.

DISCHARGE RATES: Allowing for stoppages, non-working periods, etc. and, considering 4 or 5 gangs employed, the average discharging rates are as follows:

Tanker cargo (fuel oil)	300 t.p.h., 7,200 tons per day.
Bulk cargoes (grain)	150 t.p.h.
General cargo	300–400 tons per day.
Cement	1,750–2,000 tons per day.
Bag cargoes	800–1,000 tons per day.
Steel (bundles)	600–750 tons per day.
Timber (soft wood)	500 tons per day.
Timber (Teak wood)	400 tons per day.

MEDICAL: Masters to radio prior arrival if medical attendance required on board. Hospital facilities available.

A rescue vessel, 90 ft. and 20 knots speed, equipped with surgery, operating theatre and all medical appliances is maintained by the Ministry of Health.

DENSITY: 1.028 (Winter); 1.036 (Summer).

FRESH WATER: Berths Nos. 1–7 have fresh water connections and water can be supplied by pipe-line. Rate 20/25 t.p.h.

In addition to water available alongside the berths by pipe-line and hose, water may be supplied by barge to ships alongside dolphin berths.

KNFC water tenders with capacity 1,200 tons and 200 tons are also authorised to supply vessels in outer anchorage, on request of Shipping Agents. There are 3 companies supplying water to the ships in outer anchorage.

FUEL: No coal bunkers are available.

In addition to the full facilities afforded at Mina-al-Ahmadi and Shuwaiba, light bunker fuel oil specific gravity 0.9339 – viscosity 570 sec. (300 t.p.h.), and marine diesel oil, specific gravity 0.8448 (200 t.p.h.), can be supplied alongside the deep water berths Nos. 1 to 7, while vessels are discharging, and provided nomination for supply has been made to K.N.P.C. London Office, B.P. Trading Ltd., or Gulf Eastern Co., London.

Gas oil, specific gravity 6.83, (25 t.p.h.) available on No. 6 and No. 7 berths.

Small quantities of gas oil may be supplied by tanker truck to the berths and lubrication oils are available.

FIRE PRECAUTIONS: Shuwaikh Fire Brigade is responsible for all fire fighting in port areas and storage areas. There is also a fire station situated near the Small Boat Harbour, where the 3 fire fighting tenders are berthed. A salt water main for the fighting services is laid at all berths. There are two 90 ft. fire fighting tenders capable of pumping 5,000 gallons of water per minute from 4 nozzles. In addition they can pump 900 gallons of foam per minute. The 98 ft. fire fighting tender is capable of pumping 9,000 litres of water per minute and 650 litres of foam, and the capacity of her pump is 4,500 litres of water or 143.5 litres of oil. The tender has 8 nozzles for water and 2 nozzles for foam. These modern fire-fighting units are equipped with radio, radio-telephone, radar etc.

DEVELOPMENTS: The Port will extend to the North-East and North providing an extra 26 berths and depths up to 42 ft. at A.C.D. Also the channel for tow-ways, depth up to 33 ft. at A.C.D. will be enlarged.

GANGWAY/DECK WATCHMEN: Available, but not necessary in port area.

OPENING/CLOSING HATCHES: Opening and closing of hatches is normally carried out by the stevedores on liners, and by ship's crew on charter vessels.

CUSTOMS ALLOWANCES: Tobacco: No restrictions. Wine and/or spirit allowance: Alcoholic beverage is strictly prohibited to be held out of bond. Master allowed to keep limited quantity in his cabin.

CERTIFICATES: A survey of life rafts may be carried out unless vessel's safety certificates indicate that life rafts were surveyed less than 12 months previously.

CARGO GEAR: Ship's gear and cranes used for discharging. Slings can be hired from the port.

IDENTIFICATION CARDS: Passport or seaman's book necessary.

CONSULS:

Embassies:

Algeria	519987	Oman	514380
Bulgaria	531181	Pakistan	532100
China	423871	Qatar	513599
Egypt	519955	Saudi Arabia	531155
France	516144	Spain	512722
Fed. Republic of Germany	423031	Sudan	519299
India	530612	Syria	530163
Iran	533220	Tunisia	817366
Iraq	533466	Turkey	530761
Italy	810514	UAE	518381
Japan	424051	UK	432040
Jordan	533500	USA	424156
Lebanon	519765	USSR	431422
Libya	518188	Yemen Arab Rep.	518855
Morocco	813700	Yugoslavia	810821

Consulates:

Austria	333550	Paraguay	435147
Costa Rica	238048	Sweden	816583
Cyprus	433075	Switzerland	431142
Denmark	251397	The People's Democratic	
Norway	124912	Rep. of Yemen	517898

Charge D'Affaires:

Belgium	512440	Netherland	420268
Czechoslovakia	514451	Norway	433735
German Democratic Rep.	817055	Poland	510355

Commercial Attaches:

Hungary	519615	Rumania	519640

REPAIRS: Small repairs can be arranged if sufficient notice is given. Repair facilities available for Gyro, Radar and electronics.

DRY DOCK: Floating dock capacity 33,000 tons. Syncrolift, capacity 3,150 tons.

SURVEYORS: Lloyds Register of Shipping (Kuwait); American Bureau of Shipping (Bahrain); Bureau Veritas (Bahrain); Norske Veritas (Bahrain).

REPATRIATION: Can be arranged. Seamen arriving at Kuwait Airport to join vessels at Kuwait ports can obtain transit visa at the airport, if Agents arrange to submit the necessary guarantee to the Immigration Authorities, confirming that they are in-transit and joining vessels calling at Kuwait.

In order to meet the crew at airport and arrange transit visa, cables confirming their arrivals and flight numbers are to be sent to Agents to reach them at least 24 hours before arrival of crew. Marine Superintendent of Owners, or Owners' Representatives and businessmen visiting Kuwait must have valid visas. Such visas can be obtained from Kuwait Government's diplomatic missions abroad.

AIRPORT: Served by regular airlines. Airport 17 km. from town.

HOLIDAYS: New Year's Day, Id Al Fitr, National Day (February 25), Mount Arafat Day (Wakfa), Id Al Adha, New Hijra Year, Birthday of Prophet Mohammad, Isra walma'raj. The above days are subject to alteration.

No overtime work allowed on holidays and Fridays.

EMERGENCY CALLS:

	Tel. No.
Harbour Master	810754 Office 819772 833600 Residence 832433
Assistant Harbour Master	873053 Office 819800 430712 Residence
Assistant Harbour Master	818498 Office 610535 Residence
Assistant Harbour Master	816025 Office 874084 Residence
Berthing Master	810439/814595
Signal Stations:	
Shuwaikh	810446
Ras Al Ajuza	443788/435873
Fire Station Shuwaikh	813501/817573
Fire Boats	816777
Quarantine Doctor	813535/811344/ 820432
Hospital "SABAH" Exchange	815000
Hospital "SABAH" Emergency Ward	815000/424
Police Station, Shuwaikh	435042/870027
Coast Guard	813711
Immigration Shuwaikh	813676
Customs Shuwaikh	810319

TELEPHONES: Cannot be arranged on board.
PROVISIONS: All kinds of food available at reasonable prices.
SERVICES: Swedish Welfare for Seamen. Lloyd's Surveyor. Butterworth Tank Cleaning Machines and Equipment and also under-water cleaning.
SHORE LEAVE: Permitted.
REGULATIONS: The State of Kuwait has stringent laws in force concerning the pollution of the sea by oil. The following are two amended paragraphs of this law:

Paragraph 1, Art. 4. "A person responsible for any pollution as described in Articles 1 and 2 shall be punished by a fine of not less than one thousand and five hundred and not more than six thousand Dinars. In the event of his commiting a similar crime within a period of one year from the date of his conviction, such a person shall be punished by a fine of not less than three thousand and not more than six thousand Kuwaiti Dinars, and in the event of his committing yet another crime within a year from this last conviction he shall be punished by a fine of six thousand Kuwaiti Dinars".

Paragraph 3, Art. 6. "The person responsible for pollution may suspend the detention order against the ship on payment, as a cash guarantee, of six thousand Kuwaiti Dinars to the official entrusted with the execution of such order."

The Master shall advise the Harbour Master and/or Pilot of any special damage or disability to the ship under his command before berthing or unberthing.

A vessel in outer anchorage receiving a Movement Order in writing, by signal or VHF, and awaiting the Pilot, shall carry:
By day: "G" Flag, over a black ball or shape.
By night: A white light over a red light.

Ships that receive instructions to berth at specified hours and not adhering to these instructions could lose their turn and be liable to pay charges for the time lost at the berth, and facilities arranged for and not used due to such delay.

Ships that receive instructions to unberth at specified hours and not adhering to these instructions, i.e. retarding the movement of incoming ship, will be liable to pay charges for time lost at the berth and the facilities for the incoming ship, and not used, due to such delay.

Ships unable to comply with the berthing or unberthing instructions should notify the Harbour Master in ample time of their inability to so do by VHF, visual signals, personally or through Agent.

A ship entering or navigating within the dredged channel or inner basin shall have at least 1 anchor ready for immediate use.

The Master of a ship alongside Shuwaikh wharf or dolphin berth, shall ensure that:

(a) Vessel not allowed to use VHF to any vessel except to call Kuwait Harbour Control or Kuwait Maritime.

(b) A safe and proper accommodation ladder to the quay is provided, adequately lit during the hours of darkness.

(c) A Quartermaster or watchman is stationed on deck, in charge of the ship's gangway, who shall inform the Master or the Duty Officer whenever required by the Port Authority Officials, and shall check that no authorised persons will enter the officer's or crew's accommodations.

(d) The crew or watchman to attend the mooring ropes and lines, and shall cause their adjustment from time to time, as necessary on the rise and fall of the water.

(e) That no substance, matter or material is thrown overboard, either into the water or on to the wharf.

(f) That no engine repairs are undertaken which would prevent the movement of the vessel under her own power, without first obtaining the permission of the Harbour Master.

(g) That all pipe discharges on that side of the ship nearest to the wharf are either adequately and properly covered to prevent their effluent falling on to the wharf, or their use discontinued while the ship remains alongside.

(h) It is forbidden to jettison or ballast other than clean water or pump out the bilges or oil of any description within the port limits.

(i) All ships loaded with petroleum or crude oil at the wharf shall have the end of a steel hawser of sufficient strength, paid out to the water edge, at the offshore bow and quarter, to enable tugs to take the vessel to place of safety with the least possible delay.

(j) The Master shall at all times retain on board sufficient crew to work his ship.

(k) Ratguards to be fixed to all ship's mooring ropes.

(l) The Master shall not shift his vessel while alongside the wharf, prior to receiving permission from the Harbour Master or Berthing Master.

(m) The Master shall not connect water hoses to the water supply points and take water on board before receiving permission from the person in charge of water distribution.

(n) The Master shall report to the Harbour Master or Berthing Master any incident, accident or unusual happening on board his ship.

The Master not complying with the above-stated Port Rules, shall be liable to suffer the penalties prescribed for contravention.

Warning: Port tugs are supplied with nylon and polypropylene hawsers, which require particular attention when securing to ship's bollards, in order that they do not slip. Extra turns than normal on the bollards are recommended.

Ships that receive instructions to unberth at specified hours and do not adhere to these instructions, i.e. retarding the movement of incoming ship, will be liable to pay charges for time lost at the berth and the facilities arranged for the incoming ship, and not used due to such delay.

Ship unable to comply with the berthing or unberthing instructions should notify the Harbour Master in ample time of their inability to do so, by VHF, Visual Signals, personally or through Agents.

Ship's Life Boats:

In the Harbour: It is prohibited to use the ship's boats for transportation or boat-drill.

In the Outer Anchorage: It is permitted to use the ship's boats for transportation, but the crews land *only at Niga's Dhow Harbour* situated in Lat. 29° 22.7′ N. Long. 47° 58.2′ E. and every Crew member must have in his possession a valid passport or seaman book.

TIME: GMT plus 3 hours.
AUTHORITY: Government of Kuwait, Ministry of Communications.
AGENT: International Shipping Agency Limited, POB Safat No. 20637, KIC Building, 1st Floor, Safat Square, Kuwait, State of Kuwait. Tel. 441860164. AO 510901. Telex: 2208 (Answerback "ISASHIP KWT"). and 2396 (Answerback "ISATUG KT"). Cables: "Shipagent Kuwait".

NOTES

Please also advise Shipping Guides Ltd.

Lebanon

BEIRUT (Beyrouth): 33.54 N. 35.30 E.

DOCUMENTS:

Manifests should be visaed by Lebanese Consul at ports of shipment, or at any port *en route* where there is a Lebanese Consul. If on account of non-existence of Lebanese Consul at ports of shipment or at any of these *en route* the manifests are not visaed, then such consular visa dues are collected at Beirut.

5 Copies of Cargo Manifests.
2 Store Lists.
5 Passenger Lists.
2 Lists of Cigarettes and Tobacco. (See "Customs Allowances").

PILOTAGE: Agent arranges Pilot via Harbour Master. Agent therefore to be kept well informed of ETA, 48 hrs. and 24 hrs. prior arrival. Pilot boat white with red funnel. Sound signals, 2 long and 1 short or contact can be made via VHF to Harbour Master. Pilot boards outside main breakwater. Assistance of Pilot outside daily normal hours, Sundays and official holidays, will be cost calculated at 100% more. Official normal working hours for pilotage station as follows: from 1st October up to 30th April, 0700 till 1700 hrs.; from 1st May up to 30th September, 0700 till 1800 hrs., For tankers outside harbour, the pilotage dues will be 100% extra.

ANCHORAGE: In roads outside breakwater.

RESTRICTIONS: No particular restrictions. Pilot normally available between sunrise and sunset otherwise by special agreement.

MAX. SIZE: Max. draft in port 13 m. No limitation to breadth or length.

HEALTH: Health Authorities board in roads. Health form obtainable from Agent or doctor. Smallpox and yellow fever certificates required for ships coming from Far East and Red Sea. Owners should check with Agents respecting any recent imposition of anti-epidemic regulations and requirements for additional injections for Crew members.

RADIO: Cables via Beirut Radio to and from Agent.

VHF: VHF Channels 13 and 16, Frequency 156.6 and 156.7.

TUGS: Tugs of 1,000 h.p. join vessel inside port when necessary. Ship's lines to be used.

BERTHING: If port congested priority given to vessel already registered. Passenger-tourist vessel and cargo for Army have priority. Harbour capable of berthing 24 ships simultaneously and 3 moored on buoys, discharging into barges. All discharging is by ship's gear.

Dock No. 1. Surrounded by quays Nos. 1,2,3. Depth of water varies between 3 and 8 m. Parts of quay No. 1 and quay No. 2 with 3 m. depth of water are reserved for floating units of port company and for launches of Harbour Master and pilotage service. Slipway of 1,000 tons capacity and workshops.

Dock No. 2. Surrounded by quays Nos. 4,5,6,7, with water depths varying between 8 and 10.5 m. On quay No. 5 berthing priority is given to passenger ships, while the other quays are for cargo vessels.

Dock No. 3. Surrounded by quays Nos. 8,9,10,11, with depths varying between 10.5 and 13 m. All these quays can berth ships bringing general cargo. At quay No. 8 of 13 m. depth, priority of berthing is given to grain ships.

Grain Silo At the present time bulk grain ships are unloaded by means of removable suction machines, which can be installed on the ships and deliver the grain to lorries for direct transport. There is a 60,000 metric tons capacity silo. Ships will be unloaded by means of 2 gantry type suction machines, mobile on rails with a capacity of 6×100 t.p.h. An eventual extension is already designed which would increase capacity of silo to 105,000 tons.

Containers: A ship's Master advises that containers should be loaded on one side of the vessel and vessel berth that side to the berth as crane unable to reach outboard side.

STEVEDORES: Ordered by Agent. No ETA to Stevedores necessary. Working hours, 0800-1200, 1300-1600. Otherwise overtime on Sundays and on official holidays.

MEDICAL: Master to advise Agent by cable prior to arrival if medical attendance required.

DENSITY: 1025

FRESH WATER: The port company has equipped all quays with hydrants. Ships moored on buoys can also be supplied with water from cistern barge. By shore installation or by barge. Delivery rate 20/25 t.p.h. Outside harbour double price per barge.

FUEL: Fuel, gas oil, diesel obtainable. 48 hrs. notice required.

FIRE PRECAUTIONS: Special berths for tankers.

DEVELOPMENTS: Discussions about a fourth basin.

GANGWAY/DECK WATCHMEN: Available and recommended.

OPENING/CLOSING HATCHES: For liners, by stevedores, otherwise per agreement.

CUSTOMS ALLOWANCES: (Tobacco) 40 cigarettes per Crew member (Master 2-3 cartons). Customs very strict, and will search crew cabins. Regulations are as follows:

1. That the quantity of tobacco to be allowed on board vessels upon their arrival at a Lebanese port, will be fixed on the basis of 2 packets per Crew member, passenger per day and to be calculated on a maximum period of 4 months, if the vessel emanates from an American, Asian or African port -not central Africa; and for 2 months if the vessel last port of call is in Europe, Central Africa or Mediterranean, which will be deducted from the quantity, and, on the same basis the consumption by the Crew members and passengers during their trip, and this to start from the last port of call, until arrival at a Lebanese port. That the number of passengers to be taken into account on a tourist vessel, will be the number of berths the vessel can accommodate and not the number of passengers actually on board. As to cargo vessels, the actual number to be accounted for will only be the Crew members and the Master of the vessel.

2. In the event that it is the first call of the vessel at a Lebanese port and not aware of such regulations, and it was found onboard her an excess quantity to the actual one allowed, as indicated above, a Proces Verbal will be established for the excess quantity found and the cigarettes placed under seal. An undertaking is also to be obtained from either the Owners and/or her Agents to the effect that they will submit a certificate, within 1 month, to be issued by the relevant Customs Authorities of the next port of call of the vessel after a Lebanese port. While the seizure on the vessel will be lifted when a Bank Guarantee equalling the amount of fine and dues is placed, or a personal guarantee from the Agent – if solvable – and in the event that the undertaking is not fulfilled the usual penalties will be inflicted according to the Law.

3. In the event the vessel is aware of such restriction, and for one reason or another, she is carrying an excess quantity, this excess must be, as per offical regulations, shown on the manifest legalised and issued at the last port of call touched by the vessel prior to Beirut. Any excess found over and above such declaration will be considered as smuggling and the law will be applied.

Wine and/or Spirits: 1 bottle per Crew member. Captain allowed 3/4 bottles.

CARGO GEAR: Ship's gear to be used but mobile cranes can be hired. Shore cranes except for mobile cranes only available at quay No. 9 and 11. Floating crane of 120 tons available.

IDENTIFICATION CARDS: Shore pass given to each Crew member. Passport and seaman's book to remain in Captain's care.

CONSULS: Most countries have consulates.

REPAIRS: Most types of repairs carried out.

DRY DOCKS: None except for 500/1,000 tonner.

REPATRIATION: Very good facilities for repatriation.

AIRPORT: About 10km. distant, served by regular airlines.

TIME: GMT plus 2 hrs. Summertime, GMT plus 3 hrs.

HOLIDAYS:

Holidays	*Date*	*Days*
New Year's Day	January 1	1
Al-Adha (Kurban Bairam)	Varies	2
Ashoura	"	1
New Year (Islamic)	"	1
Arab League Day	March 22	1
Good Friday	Varies	1
Easter Monday	"	1
Good Friday (Orthodox)	"	1
Easter Monday (Orthodox)	"	1
Labour Day	May 1	1
Martyr's Day	May 6	1
Ascension Day	Varies	1
Mohamed's Birthday	"	1
Assumption Day	August 15	1
All Saints' Day	November 1	1
Independence Day	November 22	1
Ramadan	Varies	2
Christmas Day	December 25	1

Port closes completely: New Year's Day, Al-Adha, Easter Monday, Labour Day, Independence Day, 1st day of Ramadan and Christmas Day. On other holidays, day work in port carried out against overtime payment.

POLICE/AMBULANCE/FIRE: Telephone numbers: Police 16, Ambulance 18, Fire 17.

TELEPHONES: On request by shipping agency, berthed ships can be connected to telephonic network of city.

SERVICES: Tank-cleaning equipment. Facilities for discharge of tank-washings, compass adjusting, laundry, etc., available.

SHORE LEAVE Crew allowed onshore.

DELAYS: 1. Unavailability of berth or barges due congestion mainly during Winter months (December to April). 2. Vessel already registered will lose turn if not returned to port in time. 3. Barge ordered for bunkering might be occupied if vessel's arrival delayed.

SHIPMASTERS REPORT: 1978.

Navigation Buoy: "The buoy off the end of the breakwater has been replaced in approximately the same position as the original buoy. The present buoy is painted green with a 'cone top mark'. Although the buoy is a light buoy the flash was not observed. On no account should the vessel pass between the end of the breakwater and the buoy as rubble is being dumped to extend the breakwater. The actual dumping position is marked.

The local Pilots are now working VHF Channel 16 from the Harbour Office".

AGENT: Gulf Agency Co. (Lebanon) Ltd., PO Box 4392, Beirut, Lebanon. Cable address: "Gacship" Beirut. Telex 20906 (Answerback "GAC 20906 LE" or Athens 216344. Telephones, 296733, 256516. AO 453957. Office in El Arz Street, Modern Building.

CHEKAA: 34.20 N. 35.43 E.

Port is used for cement loading and discharge of sulphates.

ANCHORAGE: Safe anchorage in Chekaa Bay.

MAX. SIZE: Draft up to 26 ft. 6 ins. (in calm weather) alongside quay. In event of swell, vessel required to leave quay and anchor in bay.

LOAD/DISCHARGE: 800/1,000 metric tons per 24 hours.

AGENT: See "Beirut".

RAS SELAATA: 34.16 N. 35.39 E.

Port is used for discharge of sulphates and sulphuric acid.
MAX. SIZE: Up to 21 ft. draft (in calm weather) alongside pier which has 2 cranes.

AGENT: See "Beirut".

SIDON 33.30 N. 35.21 E. (See Plan Book)

GENERAL
BERTH No. 1 HAS BEEN TAKEN OUT OF SERVICE AND ALL MOORING BUOYS HAVE BEEN REMOVED. THE SUBMARINE LINE IS STILL THERE.

BOTH THE WHITE AND THE RED SEABUOY ARE MISSING.

OPERATORS: Trans-Arabian Pipe-line Company, Sidon Terminal. The Company transports crude oil from Saudi Arabia via pipe-lines and exports from terminal South of Sidon (Saida). Terminal operates 24 hrs. a day, 7 days a week.
FLAG: All vessels required to fly Lebanese Ensign on foremast during daylight hours. Lebanese flags may be obtained from ship's Agent.
LOCATION: Sidon Terminal is open, unsheltered roadstead, situated immediately North of Zahrani River, about 5 miles South of city of Sidon (Saida), Lebanon. It is approximately 35 miles South of Beirut, and 17 miles North of Tyre.
DESCRIPTION: Terminal's Tank Farm consists of 23 storage tanks situated East of terminal at 360 ft. (average) above sea level. Marine and administrative offices, a laboratory for testing stocks, 2 large and 2 small storage tanks all located within area just above sea level. An "L"-shaped pier for harbouring Company's marine craft extends approximately 1,000 ft. from shore near Southern end of berthing area.
NAVIGATIONAL AIDS: Terminal sea buoy approximately 1 mile Westward of mooring berths in 98 ft. of water. Position 33° 32′ 02″ N.; 35° 19′ 16″ E. Buoy painted white and exhibits flashing white light every 4 seconds (flash 0.3 seconds, eclipse 3.7 seconds). Lantern 11 ft. above water and visible 8 miles. Mooring Master will board vessels within 2 miles to Westward of this buoy. Vessels should not enter inside restricted area described by a line joining South-west buoy and North-west buoy with terminal sea buoy unless so directed by Mooring Master.

Radio beacon tower located 1,200 ft. back from beach, South-east of moorings. Occulting red light (about 30 flashes per minute) mounted on top, elevation 184 ft. above sea level; position 33° 30′ 04″ N.; 35° 20′ 31″ E. Tower also marked with 2 sets fixed red lights located respectively 45 and 90 ft. below occulting red light. Radio beacon is automatic and operates on 24 hr. basis on frequency of 296.5 kc/s, with "SAD" as the identifying call sign. It will signal 2 times over a 10-second period and then give a constant 1,000 cycle tone for 72 seconds. Tower is of cage-type construction, painted red and white. About 2.5 miles South-west of terminal sea buoy and approximately 2 miles offshore is rocky shoal with approximately 32 ft. of water over it. Outside this shoal is a lighted buoy, painted red, in 51 ft. of water, showing flashing red light every 4 seconds (flash 0.3 seconds, eclipse 3.7 seconds). This buoy moored in 33° 30′ 21″ N.; 35° 18′ 04″ E. Lantern 11 ft. above water and visible 5 miles. Vessels approaching from Southward should keep offshore until radio beacon tower bears 100° true before hauling-in.

"Sailing Directions for the Mediterranean" (U.S. Navy Hydrographic Office Publication No. 154A Vol. IV) reads in part: "*Caution:* As the coast between Saida and Tyre, 20 miles South-South-westward, is bordered in places by rocks and shoal water extending as far as 1 mile offshore, it should not be approached closer than 1.5 miles, nor within depths of less than 16 fathoms."

Unlighted, white painted spar buoys mark North-west and South-west corners of restricted area. North-west buoy in 78 ft. of water and located approximately 33° 33′ 35″ N.; 35° 21′ 13″ E. South-west buoy in 57 ft. of water and located approximately 33° 30′ 20″ N.; 35° 19′ 36.5″ E. During darkness terminal range lights and mooring buoy marker lights may be visible. These lights are located inside the restricted area.

A conspicuous water tank (painted in black and white vertical bands) on a tower located 33° 29′ 27″ N.; 35° 21′ 10″ E., the top of which has elevation of 460 ft. above sea level. Location is seaward of centre oil storage tanks.

There are a number of smaller radio towers to North-west and South-west of beacon tower. South of terminal, at Medreco Refinery, is a conspicuous black stack located 33° 29′ 31″ N.; 35° 20′ 08″ E. A little further North-west from this stack is a tall pipe painted aluminium with a flare on top at 33° 29′ 35″ N.; 35° 20′ 03″ E.
DOCUMENTS:
Health Declaration: International Health Form to be filled out by Master on arrival.
Cargo Manifest: No cargo arrival manifest required, as same usually prepared by local Agent.
Clearance: No clearance required.
Crew List: 4 copies required on arrival.
Passenger Manifest: If any passengers on board.
Store List: 2 copies.
Bonded Store List: 2 copies. Present regulations at Sidon Terminal allow each seaman to retain in his possession a maximum of 40 cigarettes or the equivalent weight of tobacco or cigars. The balance of all smoking items must be collected and carefully listed prior arrival. This list will be checked by Customs before sealing lockers. If any discrepancies, vessel subject to a fine.

PILOTAGE: Vessels to be moored at Sidon will be boarded by Mooring Master of Company within 2 miles to seaward of terminal sea buoy. Mooring Master will advise Ship's Master on approaches to berth, mooring, unmooring, connecting and disconnecting submarine hoses and in all other operations within berthing area. All manoeuvring of ships within berthing area shall be done only in accordance with advice of a Tap-line Mooring Master, subject to the understanding that in all cases and circumstances Master of the vessel being manoeuvred shall remain solely responsible, on behalf of vessel's owner, for safety and proper manoeuvring of vessel. Ship's Master or qualified deck officer must be on bridge at all times while ship is manoeuvring.

Vessels must have a pilot ladder safely and securely rigged, and all vessels over 45,000 d.w.t. should have an accommodation ladder rigged in combination with pilot ladder for safe boarding of Mooring Master and Government officials. Pilot ladder should be abaft and close to accommodation ladder so that Mooring Master, after climbing a few steps, can use accommodation ladder for remaining climb. Since hoses handled on port side at Sidon, it is advisable to rig ladders on starboard side. If at night, adequate lighting must be rigged over-side for Mooring Master to approach side of ship and climb ladder safely.

Note: Vessels having special rigs, such as hoisting equipment on short sections of pilot ladder, are not required to rig pilot/accommodation ladders per the above.
ANCHORAGE: For vessels awaiting berth, good anchorage just W.S.W. of terminal sea buoy in 16 to 20 fathoms, sandy bottom. Vessels should under no circumstances anchor North of terminal sea buoy as depths are excessive for safe anchoring.
MAX. SIZE: Berths Nos. 1 and 4 depths 47 ft., and berths Nos. 2 and 3 depths approx. 67 ft. Tankers up to 150,000 d.w.t. or approx. 55 ft. draft are considered max. size which should be handled during Winter months at Sidon, and then only if vessel meets all of below recommended requirements. Otherwise, vessels of over 100,000 d.w.t. should not be nominated for liftings at Sidon during period November-March.

Based on previous experience, sudden and severe storms of long duration are not expected from April through October. Vessels over 150,000 d.w.t. may, therefore be accommodated during this period. However, prior to acceptance of nomination of vessels over 150,000 d.w.t. Tapline requires advance information regarding max. draft, vessel's equipment and location of manifold in reference to distance from stern of vessel which should not exceed 450 ft. Acceptance or rejection will be made after evaluation of above data by Sidon Marine personnel.

Summary of Recommendations for Vessels over 40,000 d.w.t.:

1. Capable, efficient and reliable anchor windlass(es).
2. Fifteen shots on starboard chain – thirteen shots on port chain are satisfactory.
3. Mooring wire winches, 1 on aft well deck, 3 on poop deck, 200 fathoms wire on each, with adequate number of manila or synthetic ropes to double up as needed.
4. Capability of lifting 16 in. hose string – 6.5 tons static weight.
5. Suitably located hang-off bits.
6. Capability of keeping vessel in a reasonable safe ballast condition (November-March) by permanent ballast or loading while deballasting, or a combination of both.
7. Ship's manifold located not more than 400 ft. from stern.

HEALTH: Rules governing quarantine of vessels are same as found in other ports.
RADIO: *(a) Facilities.* Tapline has own ship-to-shore radio telegraph, and VHF radio telephone station at terminal. This station is not open to commercial traffic. Services limited to traffic between Tapline and tankers within 3 days' sailing time from terminal. Messages to or from tanker agents classed as "Commercial" and must be routed via Radio Orient, a commercial radio station. Its call sign is ODR.

Sidon Radio, call sign ODA 3, transmits (CW) on 8502.5 kHz at 0700, 1100 GMT, the traffic list; 12840 kHz at 0730, 1130 GMT, the traffic list; 424 kHz for traffic upon request. Listens on 8534-8374 kHz for replies and calls and on 8374 for traffic. Will listen on 8476 kHz for traffic upon request; 12531-12561 kHz for replies and calls; 425, 454, 468 and 480 kHz upon request. Keeps watch only between 0500-1300 GMT on 500 kHz.

Radio Orient Beirut, call sign ODR, transmits (CW) on 8702 kHz and 13101 kHz simultaneously half-past each hour beginning at 0630 until 2130 hrs. GMT, the traffic list; 524 kHz each hour beginning at 0600 hrs. until 2100 hrs. GMT, the traffic list. Listens on 8534–8374 kHz and 12531–12561 kHz for replies and calls each hour from half-past the hour until the hour; 500 kHz 0600 to 2200 hrs. GMT and 425, 454, 468 and 480 kHz from the hour until half-past the hour for replies and calls. Keeps watch only between 0600–2200 hrs. GMT on 500 kHz.

(b) Advice of Arrival. It is important that ships establish radio contact with Tapline Station ODA3 when 3 days distant from Sidon and maintain this contact at regular intervals until just prior to arrival at the terminal. All ships should send a 72-hour ETA message to Tapline, giving the best estimate of ship's arrival time, a statement of bunker requirements and other relevant information. Shorter notice may result in berthing delay. Further ETA messages should be sent when vessel is 24 hours and 12 hours distant and to cover any other time changes occurring in the original ETA or those subsequent thereto. The 12-hour ETA should include a statement regarding "ship's readiness to load" on arrival, and time required to discharge clean ballast after ship is moored. A further contact when 4 hours away is desirable for exchange of weather data and

mooring schedule. Vessels failing to give minimum of 12 hours arrival notice may be subject to delays in acceptance.

(c) Ship-to-Shore Communications. Ship-to-shore communications, while ships are in moorings, will be by portable VHF radio units used by the Mooring Master only. The use of the ship's radio station (except Channels 16-14) and/or battery charging equipment is prohibited for safety reasons during cargo transfer operations.

In the event of normal ship-to-shore communications failure, the (ship's) emergency whistle signal should be used.

(d) Radio Message. Upon first contact with inbound tanker, ODA3 will transmit a detailed message of advice.

It is important that a reply to this message be sent soonest after receipt. Also requested that all vessels forward their local weather observations to this station while approximately 100 miles and again 50 miles Westward of Sidon when approaching and also upon departure during period November 1 to March 31. This data is used to assist in preparation of terminal weather forecasts and radio contact may be useful in event Tapline needs to furnish any information to vessel after its departure.

VHF: Tapline VHF radio telephone system operates on international Channels 14 and 16, 156.7 mc/s and 156.8 mc/s respectively. Channel 16 used to establish contact while all traffic handled on Channel 14. Tapline guards these channels on a 24 hour basis, and contact can generally be made at distances up to 100 miles from terminal. Conversations on these channels will be carried out in English language only.

Mooring Master only will be in direct charge of portable VHF ship-to-shore radio communications.

BERTHING: 5 buoys in berth No. 1 and 7 buoys in each of berths No. 2, 3 and 4. During winter months vessels over 40,000 d.w.t. usually moored in berths No. 2 or No. 3. These berths approx. 1 mile to 1.5 miles from shore. Berths numbered 1 to 4 from South to North. Vessels moored on 1 heading (West) basis using both bow anchors with max. possible spread of anchors to increase ship's anchor beam holding components. Ship's stern moored to cylindrical buoys fitted with release hooks, using 7 ropes (or wires) to respective mooring buoys. Permanent moorings consist of 7 steel cylindrical buoys in each berth. (5 buoys in No. 1 berth.)

Certain mooring buoys in all berths fitted with 1.5 in. diameter preventer wires, one end of which is secured to mooring buoys. When required, other end is brought on board vessel by a messenger line after ship moored in position. Preventer wires supplemental to ship's regular moorings during adverse conditions. Ships should have chain stoppers for handling these wires.

BALLAST: Masters are warned that no dirty ballast or bilge water may be discharged within an area extending 100 nautical miles seaward of the Lebanese coastline. All pipe-lines, sea suctions, strainers and pumps that are to be used for the discharge of clean ballast must be flushed clean prior to entering the 100 mile zone. Except for oil retrieved under "load-on-top" procedures, Masters must assure themselves that all oil tanks, pipe-lines and pumps are free of all traces of oil.

The terminal has no facilities for receiving oily ballast. A vessel must have sufficient ballast for safe manoeuvring. However, by carefully watching the weather, especially in the Summer months, by frequent interchange of weather information and berthing instructions, and, by a knowledge of the behaviour of his own vessel, a Master may desire to arrive at the terminal with min. ballast thereby lessening any possibility of infringement of the pollution restrictions of this section, and also reducing time in berth.

As soon as practicable after arrival and prior to acceptance, all the vessel's tanks will be inspected for evidence of oil in ballast tanks. Inspection will continue during discharge of ballast. If evidence of oil appears at either of these inspections, the ship must return at once to a point not less than 100 miles from the coastline and there accomplish the necessary tank cleaning. Any vessel required to return to a position at least 100 miles offshore for the purpose of discharging dirty ballast, cleaning tanks or for any similar reason, automatically nullifies any Notice of Readiness already tendered, and at the same time loses any priority held for loading. On return from sea, vessel will be entered for loading at the time of the second arrival, when a new Notice of Readiness will be tendered.

Vessels discharging dirty ballast within the prohibited 100 mile zone may be subjected to action by the Lebanese Government. In addition, ship's owners and charterers will be promptly notified of any violation.

Masters are also warned that ship's garbage or trash should not be dumped within 50 miles from the Lebanese coast.

LOADING: *(a) Readiness:* Tenders to load will normally be accepted and berths assigned to vessels in order of arrival, provided vessels have nominations for cargo valid at the time, carry clean ballast and are in all respects equipped and ready to moor. In event berthing delayed on account weather, vessels will ordinarily keep their loading priority in order of arrival. Vessels required to leave port area on account of weather (port closed), should keep in contact with terminal via radio in order that they will be available when weather moderates. Company will make every effort to load vessels on arrival, or as promptly as berth is available, weather permitting. Notice of readiness will not be accepted unless vessel ready to load. Arrival time will be considered as time Mooring Master boards vessel underway or time vessel anchors, whichever occurs first.

(b) Connecting-up. Ships loaded by means of submarine pipelines. Weight of the 16 in. hose in No. 2 berth about 6.5 tons; weight of 12 in. hose in No. 3 berth about 5 tons; and weight of 12 in. hoses in No. 1 and No. 4 berths about 4 tons. Hoses lifted by ship's gear on port side. Detail of flange templates shown in drawings below. Ships should provide manifold fittings to allow connection of flanges shown.

DETAIL OF 16", 12", 8" & 6" HOSE CONNECTIONS FROM SUBMARINE HOSE TO SHIP

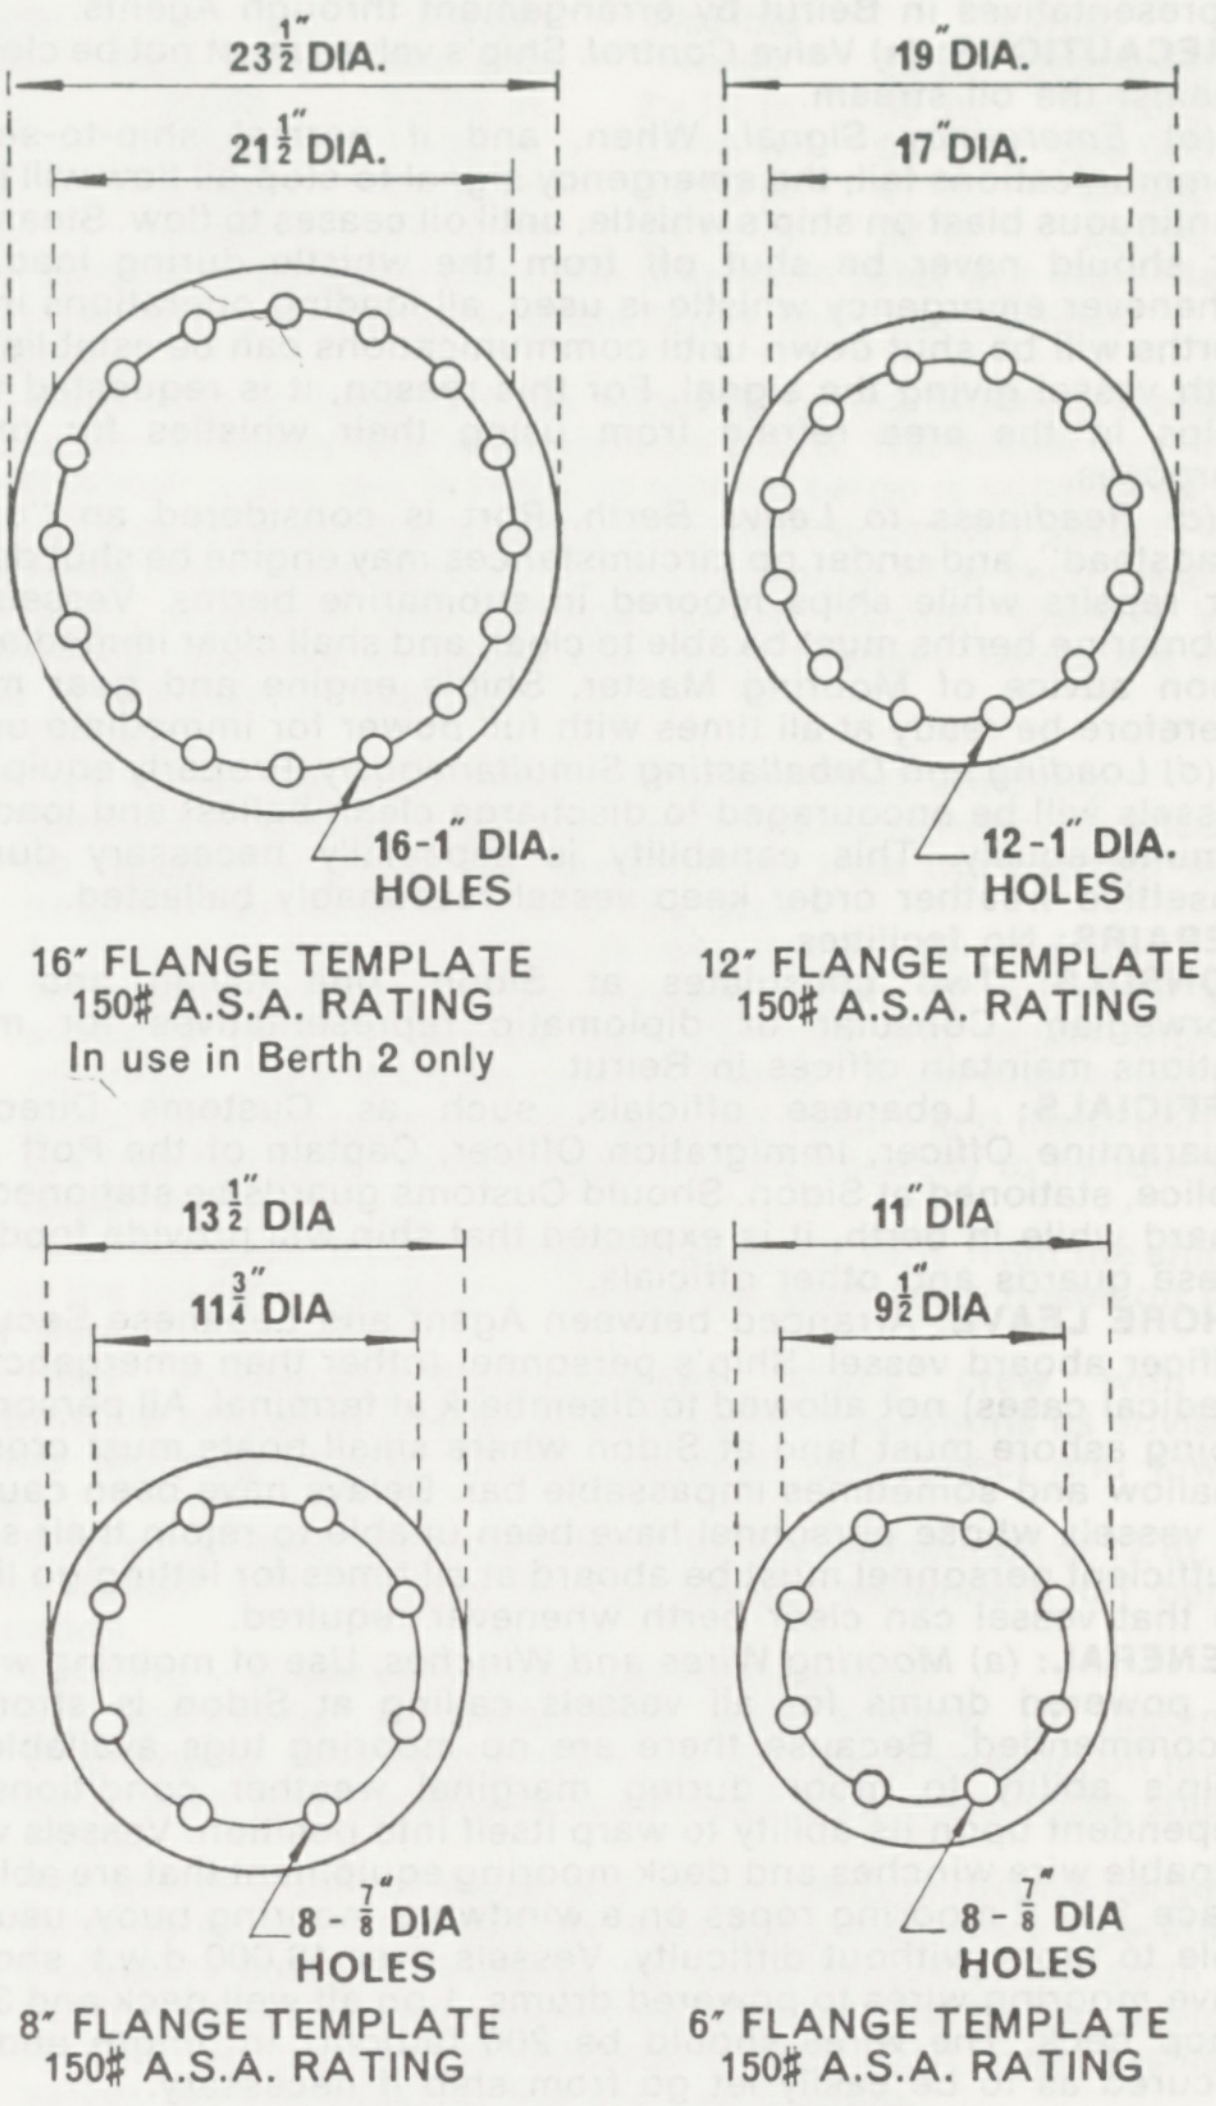

16" FLANGE TEMPLATE
150# A.S.A. RATING
In use in Berth 2 only

12" FLANGE TEMPLATE
150# A.S.A. RATING

8" FLANGE TEMPLATE
150# A.S.A. RATING

6" FLANGE TEMPLATE
150# A.S.A. RATING

Mooring Master advises ship's personnel in lifting, connecting, disconnecting and lowering of hoses. A ship's deck officer must be present, and must direct ship's crew in all hose handling. There must be sufficient crew on deck to perform this work.

(c) Rates: Loading is by gravity flow from tank farm which is approximately 360 ft. above sea level. Loading rates as follows (approximate maximum):

	Rates (BPH)	
Berth	*With 1 Hose*	*With 2 Hoses*
1	17,000	29,000 (12 in. hoses)
2	40,000	70,000 (16 in. hoses)
3	27,000	43,000 (12 in. hoses)
4	25,000	37,000 (12 in. hoses)

Order save ship's time and to ballast vessel as quickly as possible, as well as to make berth available for others, it is requested that ships receive oil as fast as it can be delivered, with due regard for safety. The removal of any restrictions, such as strainers, etc., is recommended.

MEDICAL: Neither medical nor hospital facilities provided by Tapline. Private doctors and hospital facilities available at Sidon and Beirut. Agents acquainted with situation and can make necessary arrangements.

If unable make radio contact, then vessels requiring emergency medical assistance should hoist International Code Flag "W" in daylight, and at night, send "W" (· – –) on blinker light to attract immediate attention, the same signal "W" (· – –) should be given on ship's whistle in either day or night hours. Signal should be repeated until acknowledged visually by either another ship in berth; from shore station or from Company launch. As soon as signal is received, terminal officials will advise ship's Agent as soon as possible of the emergency medical aid required.

DENSITY: Salinity of the sea is same as open Atlantic Ocean. Temperature ranges from 60°F. to 85°F. (15.6°C to 29.4°C.) depending on season.

FRESH WATER: Not available.

FUEL: Bunker fuel loaded at rate of 3,000–5,000 b.p.h. through 8 in. deck hose. Bunker connection should be located near ship's cargo manifold. Ships calling at Sidon to load crude oil should arrange for bunker fuel nominations through one of the offtaker companies well in advance of arrival. Bunker fuel will not be delivered until Tapline has received a firm nomination. Bunker fuel will be loaded as promptly as circumstances permit, but Tapline assumes no liability for any delays incurred by a vessel in berthing or loading bunker fuel. Maritime lubricants available, through marketing representatives in Beirut by arrangement through Agents.

PRECAUTIONS: *(a) Valve Control.* Ship's valves must not be closed against the oil stream.

(b) Emergency Signal. When, and if normal ship-to-shore communications fail, the emergency signal to stop oil flow will be a continuous blast on ship's whistle, until oil ceases to flow. Steam or air should never be shut off from the whistle during loading. Whenever emergency whistle is used, all loading operations in all berths will be shut down until communications can be established with vessel giving the signal. For this reason, it is requested that ships in the area refrain from using their whistles for other purposes.

(c) Readiness to Leave Berth. Port is considered an "open roadstead", and under no circumstances may engine be shut down for repairs while ships moored in submarine berths. Vessels in submarine berths must be able to clear, and shall clear immediately upon advice of Mooring Master. Ship's engine and gear must therefore be ready at all times with full power for immediate use.

(d) Loading and Deballasting Simultaneously. Properly equipped vessels will be encouraged to discharge clean ballast and load oil simultaneously. This capability is especially necessary during unsettled weather order keep vessel reasonably ballasted.

REPAIRS: No facilities.

CONSULS: Two consulates at Sidon, one Italian and one Norwegian. Consular or diplomatic representatives for most nations maintain offices in Beirut.

OFFICIALS: Lebanese officials, such as Customs Director, Quarantine Officer, Immigration Officer, Captain of the Port and Police, stationed at Sidon. Should Customs guards be stationed on board while in berth, it is expected that ship will provide food for these guards and other officials.

SHORE LEAVE: Arranged between Agent and Lebanese Security Officer aboard vessel. Ship's personnel (other than emergency or medical cases) not allowed to disembark at terminal. All personnel going ashore must land at Sidon where small boats must cross a shallow and sometimes impassable bar. Delays have been caused to vessels whose personnel have been unable to rejoin their ship. Sufficient personnel must be aboard at all times for letting go lines so that vessel can clear berth whenever required.

GENERAL: *(a) Mooring Wires and Winches.* Use of mooring wires to powered drums for all vessels calling at Sidon is strongly recommended. Because there are no mooring tugs available, a ship's ability to moor during marginal weather conditions is dependent upon its ability to warp itself into position. Vessels with capable wire winches and deck mooring equipment that are able to place 1 or 2 mooring ropes on a windward mooring buoy, usually able to moor without difficulty. Vessels over 40,000 d.w.t. should have mooring wires to powered drums, 1 on aft well deck and 3 on poop deck. The wires should be 200 fathoms in length and so secured as to be easily let go from ship if necessary.

(b) Ropes. Vessels should have 2 suitable, best quality mooring ropes of 200 fathoms each located on aft part of after well deck for use on either port or starboard side, 3 (min.) suitable, best quality mooring ropes of 200 fathoms each and 3 additional ropes of 150 fathoms each on poop deck plus properly located warping winches and bitts. Vessels equipped with mooring wire winches on poop deck may reduce required "additional" ropes accordingly. Wires are not used on port side of aft well deck due to possible fouling of wire with hose or pipe-line underwater facilities. In this position a suitable, best quality mooring rope must be used. 2 ropes of 200 fathoms each recommended, to be used on either side while mooring, and used on port side only for securing ship in berth.

AUTHORITY: Trans-Arabian Pipe-line Company.

AGENTS: Gulf Agency Co. (Lebanon) Ltd., Sidon, Lebanon. Cables: "Gacship", Sidon. Tel. 720715. AO 453957. Telex: 20906 Beirut or Athens 216344.

For communication and operational reasons address all your correspondence and cables to head-office in Lebanon: Gulf Agency Co. (Lebanon) Ltd., POB 4392, Beirut, Lebanon. Telephones: 256516, 296733. Cables: "Gacship", Beirut. Telex: 20906 (answer back: GAC 20906 LE.) or Athens 216344.

TRIPOLI: 34.28 N. 35.49 E. (See Plan Book)

(a) DRY-CARGO PORT.

Manifests should be visaed by Lebanese Consul at ports of shipment, or at any port *en route* where there is a Lebanese Consul. If on account of non-existence of Lebanese Consul at ports of shipment or at any ports *en route* the manifests are not visaed, then such consular visa dues are collected at Beirut.

DOCUMENTS:

1 Legalised copy of Cargo Manifests.
5 copies of Cargo Manifests.
2 Store Lists.
5 Passenger Lists.
2 Lists of Cigarettes and Tobacco (see "Customs allowances").

PILOTAGE: Agent arranges with Harbour Master, therefore keep Agent closely advised ETA. Harbour Master may also be contacted on VHF Channel 13 (frequency 156.6) and 16 (frequency 156.7).

ANCHORAGE: Good anchorage.

MAX. SIZE: Depth at entrance 22.5 ft. Max. draft alongside berth 22 ft. 6 in.

HEALTH: Health authorities board in roads. Health form obtainable from Agent or doctor. Smallpox and yellow fever certificates required for ships coming from Far East and Red Sea. Owners should check with Agents respecting any recent imposition of anti-epidemic regulations and requirements for additional injections for Crew members.

RADIO: Cables via Beirut Radio to and from Agent.

BERTHING: New pier about 600 m. length. 2 berths. 4 shore cranes suitable for vessels up to about 7,000 tons only. 2 heavy-lift cranes, capacities 25 and 50 tons. Lighters available for discharging alongside vessel. Ship's gear often used for discharging.

STEVEDORES: Ordered by Agent. No ETA to stevedores necessary. Working hours, 0800–1200, 1300–1600, otherwise overtime included on Sundays and on official holidays.

MEDICAL: Master to advise Agent by cable prior to arrival if medical attendance required.

DENSITY: 1025.

GANGWAY/DECK WATCHMEN: Available and recommended.

OPENING/CLOSING HATCHES: For liners by stevedores, otherwise per agreement.

CUSTOMS ALLOWANCES: Tobacco. 40 cigarettes per crew member. Customs very strict, checking crew cabins. Regulations are as follows:

1. That the quantity of tobacco to be allowed on board vessels upon their arrival at a Lebanese port will be fixed on the basis of 2 packets per crew member, passenger per day, and to be calculated on a maximum period of 4 months, if the vessel emanates from an American, Asian or African port – not Central Africa; and for 2 months if the vessel's last port of call is in Europe, Central Africa or Mediterranean, which will be deducted from the quantity, and on the same basis the consumption by the crew members and passengers during their trip, and this to start from the last port of call until arrival at a Lebanese port.

That the number of passengers to be taken into account on a tourist vessel will be the number of berths the vessel can accommodate and not the number of passengers on board. As to cargo vessels, the actual number to be accounted for will only be the crew members and the Master of the vessel.

2. In the event that it is the first call of the vessel, at a Lebanese port and not aware of such regulations, and it was found on board her an excess quantity to the actual one allowed, as indicated above, a Proces Verbal will be established for the excess quantity found and the cigarettes placed under seal. An undertaking is also to be obtained from either the Owners and/or her Agents to the effect that they will submit a certificate, within one month, to be issued by the relevant Customs Authorities of the next port of call of the vessel after a Lebanese port. While the seizure of the vessel will be lifted when the Bank guarantee equalling the amount of fine and dues is placed, or a Personal Guarantee from the Agent – if solvable – and in the event that the undertaking is not fulfilled, the usual penalties will be inflicted according to the law.

3. In the event the vessel is aware of such restriction, and for one reason or another she is carrying an excess quantity, this excess must be, as per official regulations, be shown on the manifest legalised and issued at the last port of call touched by the vessel prior to Beirut.

Any excess found over and above such declaration will be considered as smuggling and the law will be applied.

Wine and/or spirits: 1 bottle per crew member; Captain allowed 3/4 bottles.

CARGO GEAR: Ship's gear to be used. A floating crane maximum lift 50 tons is available.

IDENTIFICATION CARDS: Shore pass given to each crew member. Passport and seaman's book to remain in Captain's care.

CONSULS: Most countries have consulates in Beirut.

AIRPORT: Beirut.

TIME: GMT plus 2 hours. Summertime, GMT plus 3 hours.

HOLIDAYS:

Holidays	*Date*	*Days*
New Year's Day	January 1st	1
Al-Adha (Karban Bairam)	Varies	2
Ashoura	Varies	1
New Year (Islamic)	Varies	1
Arab League Day	March 22nd	1
Good Friday	Varies	1
Easter Monday	Varies	1
Good Friday (Oriental)	Varies	1
Easter Monday (Oriental)	Varies	1
Labour Day	May 1st	1
Martyr's Day	May 6th	1
Ascension Day	Varies	1
Mohamed's Birthday	Varies	1
Assumption Day	August 15th	1
All Saint's Day	November 1st	1
Independence Day	November 22nd	1
Ramadan	Varies	2
Christmas Day	December 25th	1

AGENT: Gulf Agency Co. (Lebanon) Ltd., Customs Street, Tripoli, Lebanon. Cables: "Gacship", Tripoli/Lebanon. Telephone: 625771 after hours 600101, 600102. Telex: 20906 Beirut or Athens 216344. Head Office: Beirut (which see).

(b) OIL TERMINAL.

OPERATORS: Lebanese Oil Installations, Tripoli.

DOCUMENTS: See "Section A – Dry-cargo Port".

PORT LIMITS: There are three spar-buoys to indicate the limits of the Company's Sea Terminal boundaries.

The location of these buoys is as follows:

1st, Lat. 34° 30′ 03″ N. Long. 35° 52′ 30″ E.
2nd, Lat. 34° 29′ 42″ N. Long. 35° 52′ 26″ E.
3rd, Lat. 34° 29′ 03″ N. Long. 35° 51′ 04″ E.

PILOTAGE: The company's Mooring Masters will meet tankers 2 miles N.E. of Tripoli Breakwater Head. Tankers of 40,000 d.w.t. and over should have rigged, when in light condition, an accommodation ladder lowered to about 12 ft. above water. This can be adjusted to suit conditions. A pilot ladder should be rigged immediately abaft the accommodation ladder, to within 2 ft. above the water. This will enable Pilot to ascend pilot ladder clear of launch and then step on to the lower platform of the accommodation ladder. United Kingdom Merchant Shipping (Pilot Ladders) Rules are relevant.

ANCHORAGE: Good anchorage immediately W.N.W. of No. 4 sea berth buoys.

MAX. SIZE: Least depth of water available in berth, and swinging circle, after deducting 6 ft. for the height above sea bed of the sea line and cradle is as follows: No. 1 Berth, 62 ft.; No. 2 Berth, 66 ft.; No. 3 Berth, 53 ft.; No. 4 Berth, 38 ft. The swinging circle is defined as 1.5 ship's lengths from dropping position of ship's inshore anchor. The approximate draft limits quoted are based on an under-keel clearance, in the berths, of 6 ft.

VLCC's will be handled in Berth No. 2 and loaded to a draft of 60 ft. During the period April to October, and subject to the Master and Mooring Master being satisfied that weather conditions permit loading to a reduced under-keel clearance of 4 ft., then the loaded draft may be increased to 62 ft.

HEALTH: See "Section A – Dry-cargo Port".

RADIO: The Lebanese Oil Installations Limited, Tripoli, must be informed 48 hours prior to arrival of a vessel's ETA, quantity of cargo required, maximum loading rate, SWL of derrick for lifting hoses and confirming that the ballast for discharge in port waters is clean. Communication with Iraq Petroleum Company, Limited, should be by cable addressed to "Petriraq, Tripoli, Lebanon", or direct to Tripoli Terminal Radio Station.

Tripoli Terminal Radio Station. Call Sign – ODC 8.

Waveband	*Hours (GMT)*	*Watch Details*
	0800–0830	ODC 8 Broadcast Traffic List and calls ships on 8514 kc/s. Listens on 8354–8374.
	1200–1230	Will transmit on 12831 kc/s. on request.
High Frequency	1600–1630	
	2230–2300	
	0000–2400	Monitor 500 kc/s. for calls and answers only.
	0730	Broadcast on 500 kc/s. QSW 442 kc/s.
	0730–0800	Transmit Traffic List on 442 kc/s., receives ship frequencies – 425, 454, 468, 480 and 512 kc/s.
	1130	Broadcast call on 500 kc/s., QSW 442 kc/s.
	1132–1200	Transmit Traffic List on 442 kc/s., receives on normal ship frequencies – 425, 454, 468, 480 and 512 kc/s.
Medium Frequency	1530	Broadcast call on 500 kc/s., QSW 442 kc/s.
	1532–1600	Transmit Traffic List on 442 kc/s., receive on normal ship frequencies – 425, 454, 468, 480 and 512 kc/s.
	2200	Broadcast call on 500 kc/s., QSW 442 kc/s.
	2202–2230	Transmit Traffic List on 442 kc/s., receive on normal ship frequencies – 425, 454, 468, 480 and 512 kc/s.
	2232	Broadcast call QSY QSX 500 kc/s.

Cables to Agents may be routed through Beirut radio.

VHF: Tripoli:

Equipment: Fixed Station sited in Terminal Building and used by Control Room.
Call sign: Tripoli Control
Range: Approximately 15 miles.
Frequency: Transmitting on 163.6 mc/s.
Receiving on 159.1 mc/s.
Watches: Continuous.

Mobile Station

Equipment: Portable, battery operated, carried aboard vessel with Mooring Master.
Call sign: Ship's name (before mooring), or Berth No. (after mooring).
Range: Approximately 8 miles.
Frequency: Transmitting on 159.1 mc/s.
Receiving on 163.6 mc/s.
Watches: Continuous, whilst Mooring Master on board.

Notes

1. Tripoli also keeps a continuous watch on the international calling frequency of 158.8 mc/s. This has a range of approximately 15 miles and its call sign is "Tripoli Control".
2. The VHF System is not connected to the main telephone switchboard and only selected shore stations have access to it.

TUGS: There is no tug at Tripoli.

BERTHING: *Sea Line Berths.* 4 berths numbered from N.E. to S.W. specifications as follows:

Berth No.	*Max. t.p.h.*	*Fixed Sea Line*	*Strings of Flexible Hoses*	*Approximate Limits*	
				Draft	*Deadweight*
1	5,000	2×24 in.	2×16 in.	56 ft.	140,000
2	7,000	1×32 in.	2×16 in.	50 ft.	250,000
3	6,000	1×32 in.	2×16 in.	47 ft.	87,000
4	1,500	2×12 in.	2×12 in.	32 ft.	25,000

As loading is by gravitation, the maximum rates are dependent upon availability of suitable shore tanks and loading lines.

LOADING:

1. *Readiness to Load,* will be received by the Mooring Master, who is the Company Representative on board. The advice from the vessel which states she is ready to receive cargo is considered as final, and as indicating that every operation necessary aboard the vessel has been completed. As soon as possible after such a signal has been received, and without further advice, loading will commence. Damage to hoses can occur if ship's valves are not open at the start of loading.

2. *Derricks*

(a) Two hoses are connected on the port side amidship.

(b) Derricks or cranes reaching over the hose connection should be capable of lifting the flexible hose from the sea-bed to a height of up to 30 ft. above the deck.

(c) A minimum SWL of 5 tons is required for 12 in. hoses.

(d) The faster loading berths equipped with 16 in. hoses are available only to vessels with derricks and tackle with a minimum "Safe Working Load of 7 tons". Such vessels will be given berthing priority when queuing occurs and these berths are free but other vessels have not the capacity to handle the larger hoses.

3. *Hose Hang-off Bitts* are required at about 10 ft. from the ship's rail at the loading manifold to secure the submarine hoses on the port side.

4. *Hose Connection/Disconnection.* Ship's crew with a responsible officer in charge to perform all operations as advised by the Mooring Master, to lift, connect, disconnect and lower hoses.

5. *Ship's manifold* – to be prepared for the connection of 12 in. or 16 in. hoses with flanges of 150 series, dependent on berth allocation.

6. *Loading – Supervision and Commencement*

(a) All operations in connection with starting of loading, discharging, switching of tanks on board and topping-off must be directly and personally supervised by a responsible ship's officer.

(b) The advice from the vessel that she is ready to receive cargo is considered as final, and as indicating that every operation necessary aboard the vessel has been completed. As soon as such a signal has been received, and without further advice, loading will commence. Damage to hoses can occur if ship's valves are not open at the start of loading.

Caution: The oil loading stream to the ship is controlled on shore and it is extremely dangerous if a ship's valve is closed against the flow of oil.

To prevent excessive pressure from surge in ship and shore lines, ship's valves must not be shut-off against the stream, and when switching tanks, ship's valves must be closed slowly. Vessels will be held liable for damages resulting from any mal-operation of valves on board.

7. *Tank Dips.* During loading frequent checks should be made by the responsible ship's officer to ensure that cargo is entering the designated cargo tanks only and that there is no escape of oil into pump-rooms or through sea and overboard discharge valves. Particular care must be exercised by ship's personnel in "Topping-off" tanks and towards completion of loading to ensure that the terminal is given timely advice of any decrease in loading rate required. Adequate "standby" notice must be given before the final "stop".

8. *Loading Operations*

(a) The Mooring Master will not transmit any loading instructions to the shore until the responsible ship's officer is satisfied that the hoses are connected correctly and that all valves have been set for receiving cargo.

(b) Loading rates requested by the vessel or quoted by the terminal will be the peak or maximum rate at any time during the loading period.

(c) While in berth, ships should be ready to move under their own power in the event of their breaking adrift, catching fire, fire in adjacent berths or other emergency. No repair should be carried out while in berth which would immobilize the ship or impair her fire-fighting efficiency.

Failure to vacate the berth on completion of loading may result in delays to other vessels, demurrage, and loss of throughput which shall be accountable to the vessel.

(d) The Mooring Master will advise the Master of the ship as to any signals needed for local requirements.

(e) The Mooring Master brings a portable radio on board for ship to shore communication.

DENSITY: 1025.

FRESH WATER: May be available at anchorage before berthing, but it is expensive.

FUEL: Fuel oil is available at Berths 2 and 3. The 12 in. bunker hose is raised on the port side of the vessel. Bunkering rates are 300 to 400 t.p.h.

CUSTOMS ALLOWANCES: See "Section A – Dry-cargo Port".

GENERAL:

1. *Ballast*

(a) Vessels should arrive with sufficent clean ballast for safe handling of vessel under prevailing weather conditions.

(b) Ballast water must be clean and a declaration signed by the Master and delivered to the terminal to this effect. Vessel's scuppers must be effectively plugged and leakage or spillage of oil aboard ship must not be swept or washed overboard.

(c) *Pollution of the sea – warning.* It is an offence to discharge dirty ballast or pump out bilges. The authorities are very strict and your attention is drawn to the Lebanese Notice to Mariners No. 23/1 of 29th July 1965, and to the volume entitled "International Conference on Prevention of Pollution of the Sea by Oil", issued by IMCO London.

In the event of your vessel discharging dirty ballast or spilling oil, cost for cleaning the pollution, third party claims and port fines shall be borne by the vessel.

It is recommended that vessels carry an adequate amount of dispersants with means of application in case of oil spills.

2. *Gear to be provided by the ship*

(a) Anchor to be fitted with marker buoys and 20 fathoms line.

(b) 4 good mooring lines of not less than 150 fathoms each and of suitable size for the vessel. 2 additional 150 fathoms lines securely tailed to the first lines for cases where 150 fathoms may not reach to the stern buoys initially.

(c) For vessels of 50,000 d.w.t. and larger, powered mooring winches with 200 fathoms of wire rope.

(d) 4 suitable rope stoppers to be available aft.

(e) 2 good chain stoppers for use on 5.5 in. circumference wires (preferably carpenter's patent stoppers).

(f) 2 good 4.5 in. circ. boat ropes 200 ft. long placed one on each side of the vessel.

(g) 2 good ropes, 15 fathoms × 3.5 in. circ. and 2 heaving lines for lowering hoses.

3. *Lighting.* Manifold and poop mooring areas should be adquately lit to enable night mooring and loading operations to be carried out with safety. Sea area around the ship to be illuminated.

4. *Deck Watch.* A deck watch must be maintained at all times the vessel is in berth. In addition to its normal duties, the watch must inspect the hose connections and area around the ship against oil spillage, pollution, and prevent unauthorised persons from boarding your vessel.

5. *Boarding of vessel.* The control of persons boarding your vessel is the ship's responsibility. Boarding should be restricted to Company employees on duty and to persons authorised by the Port Authorities as advised by your Agents.

6. *Stores/Provisions* or other items should not be received or discharged whilst loading is in progress. Launches other than the Company's mooring launch, should not lie alongside the vessel.

7. *Tanker Safety.* Masters are at all times responsible for the application of all safety precautions as prescribed in the International Oil Tanker and Terminal Safety Guide.

8. *IOTTSG Safety Check List.* The Tanker Safety check list must be completed after inspection of each item prior to commencement of and during loading. The Mooring Master is authorised to stop all loading operations should he consider that the safety of lives and property is endangered by the infringement of safety rules.

9. *Action in case of Emergency.* In the event of a fire, oil spillage or other emergency on the vessel,

The Emergency Signal is:—

3 or more blasts of not less than 10 seconds duration each on whistle or siren supplemented by a continuous ringing of the general alarm bells.

AGENT: Gulf Agency Co. (Lebanon) Ltd., Customs Street, Tripoli, Lebanon. Cables: "Gacship", Tripoli/Lebanon. Telephone: 625771 after hours 600101, 600102. Telex: 20906 Beirut or Athens 216344. Head Office: Beirut (which see).

NOTES

Please also advise Shipping Guides Ltd.

Leeward Islands

BASSETERRE, St. Kitts: 17.18 N. 62.43 W.

(See Book Plan)

DOCUMENTS:
- 3 copies of Crew List.
- 3 copies of Passenger List.
- 1 copy High Duty Cargo List.
- 1 copy Crews' Personal Effects List.
- 1 copy Clearance from last port.
- 2 copies Ship's Stores List.
- 7 copies Manifest.
- 2 copies Bills of Lading.

PILOTAGE: No pilotage required.
ANCHORAGE: Harbour at Basseterre is an open roadstead and safe anchorage will be found at a distance of 0.25 to 0.5 mile from the shore opposite the piers in the centre of the town.
RESTRICTIONS: None.
MAX. SIZE: A vessel of any size may be admitted. Anchorage position will depend on the draught of the ship.
HEALTH: The Harbour Master boards all vessels on arrival at port and inspects the clearance from the last port. If there are no health problems the vessel is immediately granted pratique. If there is suspected disease or fever on board pre-notification is recommended. If this is done the Harbour Master will have a Medical Officer with him when he boards the ship on arrival.
RADIO: Contact is through Barbados Radio, call sign 8PO.
TUGS: Not needed.
BERTHING: Ships anchor off shore or if max. draft does not exceed 10 ft. vessel may berth at the 450 ft. long cargo pier.
CRANES: 2 ton lift, mobile (Neal); 5 ton lift, mobile (link-belt); 10 ton lift, mobile (Jones).

All cranes used on cargo pier for offloading barges ferrying cargo from ship to shore.
STEVEDORES: ETA should be advised 24 hours before arrival of vessel, also tonnage to be discharged and number of gangs required. Discharging rate: 15 tons per gang per hour on bags. 6 tons per gang per hour on general cargo.
MEDICAL: Advance notice if possible – hospital facilities available. Valid Vaccination Certificate for passengers disembarking but not for intransit or cruise ship passengers.
DENSITY: No tides. Density normal for a West Indian Island.
FRESH WATER: Not available.
FUEL: No bunkering facilities.
GANGWAY/DECK WATCHMEN: Not required.
OPENING/CLOSING HATCHES: Done by stevedores.
CUSTOMS ALLOWANCES: Half pound tobacco or 200 cigarettes. Wine and/or Spirit, 1 bottle.
IDENTIFICATION CARDS: Not needed.
CONSULS: Netherlands, France, Dominican Republic.
REPAIRS: The sugar factory has a well-equipped shop for machine, welding and maintenance work. They can assist with most engine repairs.
DRY DOCKS: None.
REPATRIATION: Crew changes and repatriation can be arranged.
AIRPORT: 2 miles from town with regular daily connections to Antigua and Puerto Rico where onward passages to Canada, the U.S.A., Great Britain and Europe can be arranged.
TIME: GMT minus 4; no alteration.
HOLIDAYS: New Year's Day (January 1st); Statehood Day (February 27th); Good Friday; Easter Monday; Whit Monday; Queen's Birthday (date fixed by announcement annually); August Monday; Prince Charles' Birthday (November 14th); Christmas Day (December 25th); Boxing Day (December 26th).
POLICE/AMBULANCE/FIRE: Police 999; Fire 999; Ambulance (Hospital) 2515.
TELEPHONES: None available.
DEVELOPMENTS: A deep-water harbour and improved cargo handling facilities are being planned.
AUTHORITY: Comptroller of Customs.
AGENT: S. L. Horsford & Co. Ltd., PO Box 45, Basseterre, St. Kitts, W.I. Cable address: Horsford, St. Kitts. Telex: 822 HORSFD SKB KC. Tel. Shipping Manager, Office 2616, Home 2101; Secretary, Office 2429.

St. JOHN'S, Antigua: 17.7 N. 61.52 W.

(See Plan Book)

DOCUMENTS:
- 4 Crew Lists.
- 6 Passenger Lists.
- 1 Customs Declaration.
- 1 Declaration of Health.
- 6 Copies of Manifest.
- Port clearance from previous port.
- 3 Copies of B/L.
- 1 Copy Crew Personnel Curio List.
- Fumigation and Deratisation Exemption Certificate.

PILOTAGE: Compulsory. Messages should be received by Agents 48 hours in advance. Pilot boat may be identified by pilot flag.

Pilot boards at entrance of channel if vessel is proceeding to Deep Water Harbour. If vessel proceeding to Oil Berth, Pilot boards 2 miles North of Sandy Island.
PORT LIMITS AND COMPULSORY PILOTAGE AREA: All the waters enclosed by an imaginary straight line running due West from Weatherills Point forming the Northern boundary, by an imaginary straight line running due North from Shipstern Point forming the Western boundary and by the coastline running from Weatherills Point to Shipstern Point forming an Eastern and Southern boundary.
ANCHORAGE: Open seas just outside inner harbour. Depths exceeding 50 ft.
RESTRICTIONS: No restrictions on entry, difference in tide is negligible. Channel is 8,000 ft. long and 300 ft. wide, dredged to 35 ft.
MAX. SIZE: At present vessels of any size can anchor in outer harbour. The New Deep Water pier is 1,200 ft. long and depth alongside is 35 ft., a turning basin of 1,200 ft. diameter is available. Oil carrier's berth at Oil Refinery Pier (Sea Island) is 34 ft. of water subject to sea conditions or at "Sea Berth" in calm water exceeding 45 ft. Tidal Range is negligible.
HEALTH: Pratique granted at berth. Suspected disease or fever should be notified by cable in advance.
RADIO: Cable and Wireless (W.I.) Ltd. Barbados Radio 8PO.

Tugs fitted with VHF equipment. Harbour Master's office equipped with VHF and HF equipment. West Indies Oil Company Marine Centre keeps constant watch on VHF Channel 16/6 and HF 2182.
TUGS: 2 tugs of 1,500 h.p. available.
BERTHING: No special requirements.
STEVEDORES: 48 hours notice required to arrange gangs.
MEDICAL: Required medical attention should be cabled in advance to Agents. Hospital facilities available, smallpox vaccination required.
TANKERS: At Oil Refinery Pier several product pipe-lines of 10, two 8, 6 and 4 in., one 16 in. crude line, one 3 in. fresh-water line. 36 ft. mean low water, acceptable draft 32 ft. (deeper draft subject marine terminal approval). At Seabuoy one 10 in. Bunker C line, one 16 in. crude line; 5 mooring dolphins secure vessel in position. Acceptable draft 45 ft. No slop residue discharge facilities available.
DENSITY: 1025.
FRESH WATER: Available from Deep Water Pier and by barge in conjunction with bunker fuel deliveries.
FUEL: Normally all grades of marine fuel are available; ex wharf at Oil Refinery and by barge to vessels at St. John's Harbour and adjacent offshore bunkering area. Bunker nominations should be placed with West Indies Oil Company; Antigua. Cable "WIOC." Telex AK 112. Tel. 20141 or 21207. Oil Company will act as Agent for vessels calling solely for bunkers if requested.
FIRE PRECAUTIONS: No smoking or cooking at docks.
GANGWAY/DECK WATCHMEN: Not necessary. Available on request.
OPENING/CLOSING HATCHES: No set custom for opening/closing.
CERTIFICATES: All certificates should be on board but it is required to show Deratisation Exemption Certificate, L.S.A., Load Line.
CUSTOMS ALLOWANCES: 1 carton cigarettes. 1 bottle (26 oz.) spirits.
IDENTIFICATION CARDS: Not required.
CONSULS: French, Danish, Netherlands and Swedish Consulates.
REPAIRS: Limited engine and hull repairs available.
DRY DOCKS: None. Slipway at English Harbour suitable for small yachts and small vessels of up to 120 ft. in length, 150 tons displacement, 21.6 ft. beam, draft 11 ft. Tel. 31056.
AIRPORT: Airport is 4 miles from docks in city and served by international airlines such as BA, BWIA, Air Canada, LIAT, Eastern, Prinair, Barbuda Wings, Seagreen Air Transport, Air B.V.I., Caribbean Air Services, Guyana Airways, Carib West.
TIME: Local time is GMT minus 4. No alterations made to clocks during the year.
HOLIDAYS: 1st January; Good Friday; Easter Monday; Labour Day (1st Monday in May and no work is possible); Whit Monday; August Monday; Carnival Holiday (Tuesday following August Monday); State Day (1st November); Christmas Day; Boxing Day; H.M. Queen's Official Birthday observed either first or second Saturday in June.
POLICE/AMBULANCE/FIRE: Police 20045, Ambulance 20251, Fire 999.
SHORE TELEPHONE CONNECTION: Available.
AUTHORITY: Port Manager, Antigua Port Authority.
AGENT: Geo. W. Bennett, Bryson & Co. Ltd., PO Box 162, St. John's, Antigua. Telegraphic address "Bennett". Telex: 128 Brysons AK. Tel. 21200 or 20170, after hours 20246. Estate & Shipping Agents, Liner Agents, General Commission Merchants, Insurance Agents, Lloyd's Agents, Travel Agents, Stevedoring Contractors.

Liberia

COURTESY FLAG: Masters of vessels should check with the Pilot the correct times for raising and lowering the courtesy flag as heavy fines are imposed if raising and lowering is carried out at the wrong time. It is also advisable to carry a spare courtesy flag aboard the vessel.

BUCHANAN: 05.54 N. 10.04 W. (See Plan Book)

DOCUMENTS:
1 copy Clearance from last Port of Call.
1 copy Health Declaration.
6 copies Number of Passengers.
6 copies Cargo Manifest (even in ballast).
6 copies Crew List.
3 copies Store List (ship).
3 copies Personal Effects List.
1 copy Vaccination List.

PILOTAGE: The ship shall be considered to have arrived at Port of Buchanan when she cuts a circle with a 3 nautical miles radius from the beacon on the main breakwater head (Fl "G" 3-sec.). Lamco provides pilotage. Pilot boarding approximately 1.5 miles off the main breakwater, bearing 095°/110°. Pilot ladder on port side.

ANCHORAGE: If waiting for Pilot, anchor 2 miles off main breakwater.

RESTRICTIONS: Harbour traffic hours – towage and pilotage (ore ships), 0000–2400 hrs. General cargo ships (tankers), 0700–2300 hrs.

MAX. SIZE: See "Bulk Handling Facilities".

RADIO: Dakar Radio, and on ship's telephone working frequency if stated in sailing telegram from last port of call. Buchanan Harbour will call on 6520 kHz 4 days before ETA at 0830 hrs. GMT, or when within 200 miles call Buchanan Harbour on 2182 k/c at 0800 hrs. GMT. Communications with ore ships per HF, call 2182 k/c. Traffic, 2638 k/c, 2738 k/c. VHF, call Channel 16. Traffic, Channel 9, 11, 12 and 14.

HEALTH: Customs, health and passport inspection normally takes place at the berths. Quarantine signal must not be hauled down before "Free Pratique" is received. If diseases are suspected on board contact the Port Authorities or Agents by radio for instructions. After call at other Liberian ports where free pratique has been granted, Port Health will not board here.

TUGS: Lamco provides towage with two tugboats 1,640 h.p. and one tugboat 3,300 h.p. Tugs join vessel about 0.5 mile North of red buoy.

BERTHING: Number of berths for sea going vessels, 4. Length of quays, 2,800 ft. with 50-100 ton bollards and properly fendered. Depth of 33 ft. at commercial quay (at MLWS).

BULK HANDLING FACILITIES: *Deep Water Basin at Buchanan Ore Loading Quay.* With the completion of the deep water basin at the Ore Loading Quay the water depth alongside the quay is increased from 12.95 m. to 14.00 m. below the zero level of the General Elevation System.

The required keel clearance is still 3 ft. for ships up to 125 ft. beam. The max. permissible draft alongside the quay is thus:

$$14.00 \text{ m.} - \frac{(\text{Beam in feet } 0.3)}{123} \text{ feet} + \text{tide}$$

Tidal range:
MHWS = +1.18 m. above zero level of the General Elevation System
MLW = +0.05 m. above zero level of the General Elevation System
MLWS = +0.15 m. below zero level of the General Elevation System

Because of the necessity to save a rock shelf to support the sheetpiling of the cells when blasting and dredging the deep water basin, new fenders have been installed at the quay in order to keep the bilges of the vessels well clear of those rocks. The new fenders have a diameter of 1.20 m. against 0.55 m. of the old fenders. A ship loaded to maximum permissible draft can have a list of 5° without touching the rock slope but since she would touch the bottom with a list of about 3° such lists will not be tolerated.

Height of Shiploader: 16.5 m. above the water level at MHWS. A 2.0 m. safety margin is normally sufficient. Maximum shiploader outreach (including throw) from the new fenderline is 22.8 m. whereby a 44 m. wide vessel can be loaded. Loading rate 6,000 t.p.h.

It must be clearly understood that the sailing drafts are unchanged. The width of the deep water basin is only 60 m. It gives however, the great advantage of being able to continue loading without stopping for low water, whereby loading can often be completed 12 hours earlier than without the deep basin.

An even greater advantage is probably the increased safety, should a large ship develop engine trouble after she has exceeded the former maximum permissible low water draft, in which case operators have no alternative but to pull vessel out at HW as "dead ship" which could very easily result in a major accident with enormous economic consequences. Now operators can let vessel remain alongside over the next low tide without any risk.

STEVEDORES: As early as possible advance notice of ETA required latest by 1500 hrs. on day preceding arrival if a weekday. Or Saturday before noon if arrival on Sunday. Shore working hours: Ore handling: Monday 0700 hrs. through Sunday 0700 hrs.: general cargo handling, 0700–1200 hrs., 1230–1500 hrs., overtime 1500–2300 hrs., and 2300–0700 hrs.

MEDICAL: Hospital and medical care is provided; advance notice should be given in serious cases. Smallpox, yellow fever and cholera vaccinations are compulsory to enter the Republic. Vaccination book is required.

TANKERS: One tanker berth for discharging only. Hose connections are: 6 in. and 10 in. Max. draft 30 ft.

DENSITY: Varying but around 1020/25.

FRESH WATER: Fresh water is available, ex-quay only, rate is 20 t.p.h. Subject to availability.

FUEL: No bunker facilities available.

GANGWAY/DECK WATCHMEN: Available.

OPENING/CLOSING HATCHES: Performed by stevedores.

REPAIRS: No commercial facilities available. In cases of emergency Lamco might assist with minor repairs.

CUSTOMS ALLOWANCES: Direct sales from ships are strictly forbidden.

IDENTIFICATION CARDS: Not required.

CONSULS: Swedish Vice-Consul only; however, most countries are represented either by Embassy or Consul at Monrovia.

REPATRIATION: Can be arranged.

AIRPORT: Roberts International Airport about 1 hour ride by car; several connections to the rest of the world.

TIME: GMT; no alterations during the year.

HOLIDAYS: January 1st; January 7th; February 11th; Second Wednesday in March; March 15th; Second Friday in April; May 14th; July 26th; August 24th; First Thursday in November; November 29th; December 1st; December 25th. Special holidays as proclaimed from time to time by the Liberian Government. No work will be performed on January 1st, July 26th and December 25th.

GENERAL: Two Customs officers stay on board the ship during ship's entire stay and they should be given meals in the Officers' Mess and if necessary night quarters.

POLICE/FIRE/AMBULANCE: No phone available; however the Lamco Plant Protection Force should be contacted; one officer is normally assigned to each quay/gate.

SHORE LEAVE: Apart from South African and Rhodesian citizens, who are not allowed ashore, no restrictions.

DELAYS: Generally, no major delays have occurred. For ore carriers and tankers the tide may occasionally involve 24/36 hours waiting time depending on the size of ships expected to load: general cargo ships; no delay.

AUTHORITY: Port Operators: Lamco J. V. Operating Company.

AGENTS: All ore carriers must employ LJVOC as their Agent.
Other vessels:
Scanship (Liberia) Inc., PO Box 19, Buchanan, Tel. 3255. Telex via Monrovia 4281.

MONROVIA: 06.20 N. 10.50 W. (See Plan Book)

DOCUMENTS:
4 Crew Lists.
4 Passenger Lists or Statements "Nil" if none aboard.
2 Manifests for Customs. This should state ballast if no cargo aboard.
4 List of Ports of call from commencement of voyage with date of calls.
1 International Health Declaration.
1 List of dates of smallpox, yellow fever and cholera vaccination.
4 Store Lists.
2 Crew Custom Declarations.
Immigration now stamp all seamen's discharge books or passports.
2 Livestock Lists.

PILOTAGE: Pilot is compulsory. Pilot ordered through local Agent. 24 hours or minimum 12 hours notice of ETA by Radio Telephone on 2182 kcs. Pilot instructs ship through signal tower or direct on VHF Channel 16.

Pilot comes out from inside breakwaters by pilot launch, displaying "H" flag and "Pilot" in large black letters on side of the launch. Pilot will inform ship by VHF which direction to proceed to meet the pilot launch. Vessels should always keep clear of the Fairway Channel, as very large bulk carriers sail on deep draft.

ANCHORAGE: Good unlimited anchorage space available on roadstead S.W. of Leading Line, from 7 to 10 cables from Southern breakwater end, depth 7 to 10 fathoms. Anchorage safe but subject to moderate South-westerly swell during rainy season, April to October.

RESTRICTIONS: Pilot service is day and night. Loaded oil tankers berth in daylight hours only. Deep loaded vessels i.e. 40 ft. draft and over are restricted to tide for berthing and sailing. Maximum draft for main ore piers is 45 ft. Vessels up to 860 ft. length can be accommodated at these piers. No restriction on beam except that carriers with beam in excess of 126 ft. may experience difficulty in loading with present loading gantries. Bulk carriers of 90,000 tons d.w.t. and over will berth only in daylight hours.

MAX. SIZE: See "Restrictions" and "Berthing".

HEALTH: Vessels entering must fly International Code flag "Q". Port Health Officials board upon berthing. Pratique automatic for vessels having cleared at other Liberian ports, but vessel must still clear Customs.

RADIO: The Freeport of Monrovia maintains a continuous listening watch on HF 2182 kcs and VHF Channel 16. Vessels are to call Freeport 24 hours or minimum 12 hours, giving ETA before arrival. Cables should be routed to Agents through Government radio station, ELC or via French Cables through Dakar or Abidjan.

TUGS: 3 tugs of 1700 h.p. available. Join vessels just inside breakwater entrance. For berthing, tug lines used; for sailing, ships lines often used. One additional tug, 3,000 h.p. is expected to join the fleet in September 1978.

BERTHING: Ships are discharged by their own gear. Mobile cranes of up to 40 tons are available.

Vessels loading at the Iron Ore Piers are limited to a maximum draft of 45 ft. and sail from 2 hours before high water up to high water. However, ships over 90,000 tons will sail from 2 hours before high water up to 30 minutes before high water. Vessels proceeding to the Bunker Pier are limited to a maximum draft of 32 ft. Tankers discharging at the Crude Oil Berth are limited to 38 ft. draft and a maximum length of 700 ft. Tankers at this berth moor by means of two anchors and starboard side to the breasting dolphin with the stern fast to the mooring dolphin. Discharge is by means of submarine and floating pipe-line connected to the starboard side midships. Fishing Pier has a 90 ft. wide channel and maximum draft of ships berthing there is limited to 16 ft. and maximum length of 240 ft. The main General Cargo Pier is 2,000 ft. long, and vessels up to 625 ft. in length can be berthed. The maximum permissible draft at this pier is 30 ft., at which draft vessels will berth on the tide, that is 2 hours before high water till high water.

STEVEDORES: Several stevedoring companies. Port Authority handles all cargo on shore and accepts cargo ex-ship's hook only.

Stevedores gangs have to be ordered the day before required, therefore essential for Agents to receive ETA messages in sufficient time.

MEDICAL: Whenever possible Masters should cable Agents if require medical attention especially when arriving week-ends or during night. Hospital facilities available. Port Health require smallpox and yellow fever vaccinations for crew members.

TANKERS: See "Restrictions" and "Berthing".

DENSITY: Density varies with the tide. Also varies during rainy season as river flow increases. Varies from 1009 to 1024 oz. per cu. ft. with average of approx. 1019 oz. per cu. ft.

FRESH WATER: Available only on marginal wharf and three Iron-ore Piers by means of hoses from shore. Average rate of delivery approx. 20 t.p.h. Water also available at the LRC Pier.

FUEL: Light diesel oil and heavy fuel oil available and these can be blended to specification by supplying oil company. Fuel and diesel only available on bunkering pier.

GANGWAY/DECK WATCHMEN: Private security men are engaged by the Agent. Port security also maintain regular patrol.

OPENING/CLOSING HATCHES: Normally done by stevedores.

CUSTOMS ALLOWANCES: Tobacco, reasonable quantities for consumption while in port. Wine and/or Spirit, as tobacco.

IDENTIFICATION CARDS: Not required, but seamen's books are endorsed aboard by Immigration.

CONSULS: Majority of foreign countries have Consuls.

REPAIRS: Limited deck and engine repairs can be carried out by private companies.

DRY DOCKS: One very small floating dock capable of lifting 300 tons with max. draft of 8 ft. This dock is used for small coastal craft and only accepts very limited outside work. There is also a synchrolift of about 250 tons, owned by private fishing company.

REPATRIATION: Repatriation of crews is possible.

AIRPORT: Roberts Field International Airport 45 miles distant. Served with daily international flights to Europe and America.

TIME: GMT.

HOLIDAYS: Many official holidays during year but cargo work carried out those days on overtime rates. Port closes 3 times a year: 26th July (Independence Day), Christmas Day and New Year's Day.

POLICE/AMBULANCE/FIRE: Port Authority have own Security Force and Fire Service, situated in port area. There is also an ambulance service.

TELEPHONES: There are no facilities for telephones on board.

SERVICES: Hull, deck and engine surveys can be obtained through Lloyd's, German Lloyds, B.V., Norske Veritas, America Bureau Agents and most of the other classification societies.

SHORE LEAVE: No restriction on shore leave.

AUTHORITY: National Port Authority.

AGENT: Scanship (Liberia) Inc., PO Box 209. Tel. 221634, 221636. Telex 4281. Cables: "Scanship Monrovia".

SINOE: 04.59 N. 09.03 W.

DOCUMENTS:

1 copy Health Declaration
2 copies Store Lists
2 copies Vaccination Lists
2 copies Cargo Manifests
1 copy Clearance Last Port
2 copies Crew Declaration Forms
1 copy Stowaway List
5 copies Crew List
5 copies Kru Boy List — if any onboard
4 copies Ports of Call
4 copies Narcotics Lists
4 copies Passenger Lists
4 copies Animal Lists
4 copies Arms/Ammunition Lists

PILOTAGE: Not compulsory but recommended, and NPA Pilot available. No night pilotage. On approach Agent or Sinoe Pilot can be contacted by VHF Channel 16/2182 SSB Radio. Pilot boarding 1.5 miles off the harbour. No official Pilot Boat available but Pilot using small tug belonging to Scanship.

ANCHORAGE: Anchorage can be obtained in a depth of 7 fathoms about 8 cables West of Blubarra Point — bottom mud and sand.

MAX. SIZE: Max. length which can be accommodated alongside Pier, 400 ft. and Max. draft on departure from Pier 18 ft. 6 in. Max. length for a vessel moored across Basin, 500 ft. and max. draft on departure 23 ft.

HEALTH: Boarding party including Port Health Officials clear vessels while still in anchorage. Even when a vessel has called at another Liberian Port prior to Sinoe Port Health still boarding.

RADIO: Monrovia Radio.

VHF: See "Pilotage".

TIDES: Average 4 ft.

TUGS: 1 NPA tug 600 h.p. and 2 Scanship tugs 180 h.p. and 220 h.p. respectively.

BERTHING: Alongside Pier only 1 ship of max. length 400 ft. plus a small vessel of up to 175 ft. can be accommodated. Salt water only. Cargo handling to be carried out by vessel's own gear, however, NPA mobile crane available max. 10 tons capacity.

BULK CARGO FACILITIES: Cargo handled-forestry products only i.e. logs, boules, sawn timber and plywood.

SPECIALISED CARGO HANDLING: Only equipment available for handling forestry products plus a very limited quantity of general cargo plus rubber.

STEVEDORES: Advisable to cable number of gangs workable, 24 hours prior of arrival. Vessels working full capacity gangwise are loading per 24 hours 500-1,000 cu.m. depending on type of forestry products and whether loading in basin or alongside.

MEDICAL: Medical facilities available to a very limited extent. All normal vaccinations possible. International vaccination card required.

TANKERS: Only facilities for small coastal tankers of max. LOA 180 ft. available moored alongside main pier.

DENSITY: Pure Salt.

FRESH WATER: Small quantities can be supplied by the NPA tugboat only.

FUEL: Small quantities of Diesel can be obtained but it is not advisable to rely on supply.

CONSULS: Nil.

REPAIRS: No facilities.

DRY DOCK: No docking facilities.

SURVEYOR: Nil, but surveyor can be called from Monrovia.

GANGWAY/DECK WATCHMEN: Not compulsory but recommended.

HATCHES: Opening/closing normally carried out by crew.

CUSTOMS ALLOWANCES: 200 cigarettes/1 bottle spirits per crew member, but depending on duration of stay.

CARGO GEAR: Always by ship's gear.

REPATRIATION: Possible through Monrovia Airport (Robertsfield). Small airstrip 5 miles from Sinoe Harbour with daily connections to Monrovia by small charter planes or small planes operated by Air Liberia.

TIME: GMT.

HOLIDAY: Only days where no work can be carried out are 24th August and 25th December.

POLICE/AMBULANCE/FIRE: NPA has ambulance and limited fire fighting equipment.

SHORE LEAVE: No restrictions.

IDENTIFICATION CARDS: Not required.

REGULATIONS: Vessels deemed unfit by NPA (derricks lifting capacity too low in the opinion of the Authority, or in an apparent poor condition, etc.) might be refused entry to port. This especially applies when a congestion is faced at Sinoe, and it is feared by the Authority that such a vessel is unable to handle an acceptable daily tonnage.

During 1976 several vessels have been rejected by NPA on the above grounds.

DELAYS: During the rainy season a heavy swell running into the harbour is frequently encountered, causing mooring lines to part, forcing vessel alongside to shift to the basin/roads awaiting more favourable conditions. Hurricane hawsers recommended.

DEVELOPMENTS: An 80 m. extension to the Pier is planned and expected to be commenced during 1977.

GENERAL: Vessels should not expect to be able to purchase provisions at Sinoe apart from a limited variety of tinned foods.

AUTHORITY: National Port Authority.

AGENT: See 'Monrovia'

Libya

GENERAL: All ports:

CLEARANCE: ETA to be advised to Port Authority 24 hours before arrival, including the following information: Ship's Name, type, Nationality and port of Registry; Owner, Master and Agent names; Gross and Net tonnage; Ship's length and draft forward and aft; Expected duration of stay in the port; Last port of call, tonnage, quantity and kind of cargo for discharging and loading; Full details of any dangerous liquids or cargo; Number of passengers and crew; Health situation.

Before arrival at the outer limits of the port, vessel requested to hoist the following signals: Flags of her call-sign; Flag of Quarantine; Flag of ship's Nationality; The Libyan Flag on the foremast; Red Flag during daylight and Red light during night-time, if carrying explosives or any inflammable cargo; Pilot Flag and the international flag code signals must be respected.

PILOTAGE: Pilotage is compulsory for all vessels. Pilot boat will meet ships outside the harbour. Ships should wait for Pilot at anchor outside the harbour if weather is good. In case of bad weather, after getting permission from Harbour Master ships may enter the harbour at their own risk and anchor inside.

TUGS: Tugs are available at all Libyan Ports.

HEALTH: The following documents to be provided for the doctor: A valid Fumigation Certificate; International Vaccination Certificate for every person on board; Health Certificate for any animal or bird on board. No automatic free pratique between the Libyan Ports.

CUSTOMS ALLOWANCES: 200 cigarettes for each crew member or passenger. All kinds of alcoholic drinks are forbidden, even wine and beer, and to be kept in the store under the customs seal. Also arms, perfume, saccharine and all kinds of anaesthetic. The sum of 10 Libyan dinars allowed for each crew member. All Libyan and Foreign currency to be declared in the currency declaration. All personnel effects and electronics to be declared in the crew declaration.

BLACK LIST: Libyan law prohibits vessels from having on board any goods or containers of Israeli origin. Any vessel having such goods or containers on board on arrival in the harbour will be liable to heavy fine and confiscation of the goods or containers. The Libyan Authorities may, moreover, refuse to clear the vessel.

DOCUMENTS: *On arrival:* Last Port clearance; Full sets of cargo documents; Copies covering consignment; Certificate of origin; Bills of Lading, etc. 8 copies of Crew List; 8 copies of Passenger List; 7 copies of Cargo Manifest; 3 copies of Cargo Plan; 1 copy of Crew Declaration; 1 copy of Currency Declaration; 1 copy of Store List.

During the first 24 hours of arrival: Valid certificates to comply with all the International conventions in force for the State whose flag the ship is flying. Certificate of Registry. For the National ships, moreover, the official log book, engine log book and ship's articles.

REGULATIONS: Foreign currency not to be taken ashore. Crew members visits between ships are not allowed without the prior permission of custom and immigrations. Ship's lifeboats are not to be used within harbours limits without the prior permission of the authorities. No engine repairs to be carried out in port whilst alongside or at anchor in the port without prior permission of authorities. Movements of ships in the port are not allowed without instructions. Using ships propellers whilst in port is not allowed without permission. Ships whistles not to be used without good reason. Cleaning funnels or making smoke whilst in port is strictly forbidden. Ship's gangway to be in position at all times whilst alongside. Rats guards to be fixed all times on every rope. Painting or scraping the outer hull of the ship not to be carried out without prior permission of authorities. Duty officer to be on board all the time accompanied by sufficient crew.

For tankers or vessels laden with dangerous cargo; moreover, the mentioned hereabove: Red flag to be hoisted in daylight and red light to be on in the night-time. No movements allowed between sunset and sunrise for such ships. Electricity to be off from ships holds whilst loading or discharging. Towing wires with suitable shackle to be ready fore and aft. Smoking and any kind of fire are strictly forbidden on deck. All steps for safety to be carried out.

POLLUTION: Pollution of any kind is strictly forbidden. Any ship causing any kind of pollution will be liable to heavy fine.

BERTHING PRIORITY: The berthing priority scheme, according to law, as follows: 1) Passenger ships. 2) Animal ships. 3) Liner and mail ships. 4) Cargo ships. 5) Tankers and dangerous cargo ships. Ships with cargo of less than 300 tons, may not have to comply with the scheme; subject to Harbour Master's decision.

OPENING/CLOSING HATCHES: To be done by crew.

IDENTIFICATION CARDS: Seaman's book or Discharge book, Passports, Identity Cards — all should be valid.

HOLIDAYS: Friday is the weekly day off. Revolution day (1st Sept. yearly); Evacuation days (28th March, 11th June, 7th October; yearly), Syrian Revolution day (8th March, yearly); Sudanese Revolution day (25th May, yearly); Egyptian Revolution day (23rd July, yearly); Hijra New Year (1st Moharam, Muslim year); Ashoura (half day, 10th Moharam, Muslim Year); Mohammadan birthday (12th Rabih Awel, Muslim Year); Israa Wa Merag (half day, 26th, Rajeb, Muslim Year); Eid El-Fitr (1st, 2nd & 3rd Shawal, Muslim Year); Eid El-Adha (9th, 10th. 11th, & 12th Zi Al-Heja, Muslim Year).

TIME: Local time at all the seasons is GMT plus 2 hours.

SURVEYORS: The following addresses are Agents for the mentioned Classification Societies and may be contacted for the necessary surveys on request:–

Lloyd's Register of Shipping: P.O. Box 111115 Tripoli. Telephone: 74383. Telegraphic Address: LLOYDSREG Tripoli Libya.

Bureau Veritas: Tripoli: Orfelli Agencies, 109 – 1st September Street, P.O.B. 2283, Telephone: 35338 and 37398, Telegraphic address: Shetaf Tripolilibia.

American Bureau of Shipping: Tripoli: Libyan Arab Shipping, Baghdad Street, Andalus Building, P.O.B. 882, Telephone: 41712 and 39358, Telegraphic Address: Arabship Tripolilibia, Telex 20033 Arabship.

Germanischer Lloyd: Tripoli: Johs Rieckermann, Baghdad Street, Andalus Building, P.O.B. 2121, Telephone: 37021 and 31069, Telegraphic address: Rieckermann Tripolilibia.

Registro Italiano Navale (RINA): Tripoli: Mr. Mahmoud Gamar, c/o Libyan Arab Shipping Co., Baghdad Street, Andalus Building, P.O.B. 2325, Telephone: 41712 and 39358, Telegraphic address: Gamarin Tripolilibia.

MINE FIELDS: The following areas are prohibited area and dangerous for navigation due to mines:

1) 32° 52.78′ North & 13° 24.6′ East
32° 57.67′ North & 13° 24.46′ East
32° 57.67′ North & 13° 18.00′ East
32° 53.82′ North & 13° 22.30′ East

2) 32° 53.70′ North & 13° 20.61′ East
32° 55.93′ North & 13° 18.00′ East
32° 55.93′ North & 13° 15.00′ East
32° 54.45′ North & 13° 15.00′ East

3) 32° 37.00′ North & 23° 13.00′ East
32° 14.50′ North & 23° 31.00′ East
32° 10.50′ North & 23° 28.50′ East
32° 37.50′ North & 23° 7.50′ East

ATTENTION: It is imperative that vessels contact the wireless stations on the Libyan coast at a distance of 30 miles from the proceeding port, giving the ship's position. Ships winches and cargo gear should be in good order otherwise they will be liable to heavy fine if any delay occurs.

FLOATING DOCK: See "Tripoli".

AUTHORITY: General Ports and Lights Authorities, Tripoli

AZZAWIYA: 32.48 N. 12.42 E.

Also refers to General All Ports.

LOCATION: Azzawiya Oil Terminal is situated about 50 km. West of Tripoli.

PORT LIMITS: Vessels are considered to be an "Arrived Ships" and (subject to charter party terms) lay time will commence, when the ship is approximately 2 miles off the S.A.L.M. berths.

DOCUMENTS: Masters are advised to have the following documents prepared before arrival in order to expedite ship's clearance:

(a) Crew List.
(b) Customs documents.
(c) Health documents.
(d) Bills of Lading.
(e) Ship's papers and certificates.

PILOTAGE/APPROACHES: Vessels are advised to anchor in a position 1.5 miles (NW) North West of S.A.L.M. Berth No. 1 to await Pilot and Agent/Customs clearance. Vessels must keep clear of the area deemed to be the pilotage area and not approach the berth closer than 1 mile without receiving Harbour Master's permission. Admiralty charts indicate an anchorage symbol in position:

Lat. 38° 49′ 00″ N. Long. 12° 42′ 00″ E.
and Flare symbol in position:
Lat. 32° 47′ 25″ N. Long. 12° 42′ 00″ E.

Azzawiya Oil Terminal is adjacent to the flare. Tankers are warned that it is unsafe to remain at anchor during adverse weather conditions and to keep to northward of Lat. 32° 50′ N.

While at berths, tankers must have main engines ready for immediate use at all time. Sudden, and violent changes of weather may occur at any time, and vessels may be required to leave berths at very short notice. Pilot and service craft are available during day hours only until further notice.

RESTRICTIONS: Vessels must have sufficient ballast for safe manoeuvring and must not be trimmed more than 3 ft. by the stern.

If in opinion of the Marine Superintendent or the Mooring Master, the ship has insufficient ballast, she may not be allowed to berth.

The discharge of dirty ballast is strictly prohibited.

HEALTH: Local Authorities will board vessels to grant pratique. Vessel must report any suspected disease or fever to local Health Authorities. There are shore facilities to treat serious injuries or major accidents.

RADIO/VHF: Call sign: "Azzawiya Control".

Azzawiya Control keeps 24 hours watch on Channels 16 and 22.

Vessels approaching the anchorage area must give the following information when possible:

(a) Ship's name and flag.
(b) Cargo nomination (if available).
(c) Distance between ships rails and manifold.
(d) Manifold sizes and derrick capacities (S.W.L.).

Cargo transfer is carried out through VHF Channel 12 and/or

Storno Walkie Talkie radios as the situation may require under the Mooring Master's Supervision.

Tankers should have the port derrick rigged before berthing and capable of lifting 10 tons if nominated for S.A.L.M. berths and 7 tons for C.B.M.2.

BERTHING: There are 3 off-shore berths with the following descriptions:

1 *Conventional buoy mooring berth:* Named C.B.M. No. 2 (Clean product berth). Lat. 32° 48′ 07″ N. Long. 12° 42′ 52″ E.

Vessels will lie in this berth on a heading of 318° (T) approximately. Using 2 anchors, each with about 7 shackles in water. Depth of water 21 m. approximately. Size of vessels allowable for this berth is 5,000–20,000 d.w.t. The berth is 1,200 m. offshore.

2 *S.A.L.M. Berths:* (Single anchor leg mooring) for crude imports/fuel exports.

S.A.L.M. No. 1: Buoy is moored approximately 1,900 m. offshore with an average depth of 26 m. in position:

Lat. 32° 48′ 29″ N. Long. 12° 41′ 55″ E.

the berth is designed for vessels of 10,000 to 100,000 d.w.t. but not limited on size.

S.A.L.M. No. 3: Buoy is moored approximately 1,500 m. offshore with an average depth of 30 m. in position:

Lat. 32° 48′ 23.8″ N. Long. 12° 41′ 08.7″ E.

The berth is designed for vessels of 15,000 to 140,000 d.w.t. but not limited to the above mentioned sizes.

No lights have been installed as yet to mark C.B.M. No. 2.

S.A.L.M. berths No. 1 and No. 3 are each equipped with a radar reflector and navigation light installed on the buoy deck with the following characteristics:

Colour: 1 white, 1 amber.

Code: Each transmitting morse letter "U" every 12 secs.

On all these berths, hose connection is carried out by ship's crew under Mooring Master's supervision.

GENERAL: No shore leave. No crew changes for non Libyan flag vessels. Fire and Safety regulations will be strictly enforced at all times. No fuel, diesel, fresh water or supplies available. Lifeboat not to be lowered in water.

BENGHAZI: 32.06 N. 20.03 E.

Also see "General" before first Port.

PORT LIMITS: The water area existing within the actual breakwater and that which may fall within any new breakwater eventually constructed up to the bridge across the shallow water basin at the Eastern side.

b) The water area known as the navigational channel outside the harbour commencing as from the harbour entrance along the distinguishing marks of the channel for a distance of 1 mile (2 km.).

RESTRICTIONS: Vessels are not permitted to enter harbour between sunset and sunrise.

MAX. SIZE: All types of ships with 27 ft. draft and less in Wintertime and 28 ft. and less in Summertime are safe to enter the harbour.

RADIO: Benghazi Port Radio, from 0800 to 1800 hrs., call sign 5AV, R/T 2182 V.H.F. Channel 16.

BERTHING:

Quay No.	*Length* m.	*Depth* m.
1	310	9
2	280	9
3	170	9
Libya No. 1	40	5.5
Libya No. 2	130	5.5
Libya No. 3	115	5.5
F.J. No. 1	135	5.5
F.J. No. 2	135	5.5
F.J. No. 3	135	8

Note: F.J. No. 3 not in use at the present time.

STEVEDORES: All stevedoring operations and formalities to be done by Agent, 2 stevedoring companies will be formed in the near future.

CRANES: Electric floating crane available up to 100 tons.

MEDICAL: All facilities available.

FRESH WATER: Available by barge and alongside. Should be obtained from Port Authority through ship's Agent.

FUEL: Available through Agents. A notice of 48 hours needed, advisable for Chief Engineer to check what grades are available.

REPATRIATION: Facilities exist without difficulty.

AIRPORT: Benina airport situated 29 km. away.

DEVELOPMENTS: Port extension project expected to be decided in the near future.

WATCHMEN: Compulsory, provided by Port Authority.

CONSULS: France, Germany, Greece, Italy, Saudi Arabia, Tunisia, Syria, U.K., U.S.A., U.S.S.R.

REPAIRS: Minor repairs are possible. Also see "Tripoli".

POLICE/AMBULANCE/FIRE: Police 99, Ambulance: 2131, 2132, 2281, Fire: 5555, 5599.

SHORE LEAVE: Allowed after free pratique, Custom and Immigration formalities completed.

AUTHORITY: Port Manager and Harbour Master.

DERNA: 32.45 N. 22.40 E.

Also see "General" before first port.

PORT LIMITS: The water area existing within the actual breakwater and an imaginary line connecting the end of the breakwater and the damaged breakwater existing at the Southern side.

b) The water area known as the navigational channel outside the harbour commencing as from the harbour entrance for a distance of 1 km

RESTRICTIONS: Vessels are not permitted to enter harbour between 2100 and 0600 hrs.

MAX. SIZE: Depth of Inner Bay – 8 m., Entrance – 9 m. and Outer Channel 10 m.

RADIO: Recommended that radio messages for Agents be sent via Malta Radio or any other near coast station.

BERTHING: Old Quay, Length 120 m., depth 6 m. New Quay, length 240 m., depth 9 m.

STEVEDORES: All stevedoring operations and formalities to be done by Agent. 2 new companies will be formed in the near future.

TANKERS: Max. size 18,000 d.w.t. Max. draft 11.5 m. if weather conditions permit.

MEDICAL: Available.

FRESH WATER: Available alongside, to be supplied by Port Authority through ship's Agents.

FUEL: Available through Agents, a notice of 24 hours needed. Advisable for Chief Engineer to check what grades are available.

REPATRIATIONS: Available via Benghazi.

DEVELOPMENTS: Port extension project under construction.

WATCHMEN: Compulsory, provided by Port Authority.

CONSULS: Nearest consuls situated at Benghazi.

REPAIRS: Not available. See "Tripoli".

POLICE/AMBULANCE/FIRE: Call Port Manager, 2063 and 2074.

SHORE LEAVE: Allowed after free pratique, Custom & Immigration formalities completed.

AUTHORITY: Port Manager and Harbour Master.

ES SIDER: 30.38 N. 18.22 E. (See Plan Book)

(Also refer to "General – All ports").

DOCUMENTS: Oasis acts on behalf of tankers loading at Es Sider and shall prepare all crude oil loading documents. Arab Shipping Company is contracted by Oasis for all normal agency duties. This agency is currently the only agency used by the four Owner Companies.

After a tanker arrives at the anchorage or is moored in a berth, an agency representative will come aboard, accompanied by Libyan Customs Officials and Immigration Police. The agency representative will present certain clearance forms to the Master, which should be completed as soon as possible. After these forms have been signed by the Master, they shall be returned to the agency representative, who shall make the necessary distribution.

Crude oil loading documents shall be prepared by the Oasis documentation group prior to and during loading operations, to expedite their final completion. When the tanker has been loaded, the documents shall be completed and endorsed by the Customs Officer and by the representative of the Ministry of Petroleum Affairs. The documents shall then be distributed aboard the tanker and elsewhere, in accordance with previously arranged standard documentation schedules.

The tanker shall be considered clear to depart Es Sider when the crude oil loading documents have been delivered to the Master.

Libyan Customs Authorities:

(*a*) List of the crew with a declaration of their personal belongings (form supplied by the Customs Authorities).

(*b*) List of tanker's stores.

(*c*) List of passengers.

(*d*) Six copies of Cargo Manifest for cargo to be discharged at Es Sider.

(*e*) One copy of Cargo Manifest for cargo in transit.

Blank copies of "Certificate of Discharge" are placed on board every vessel at Es Sider. These certificates must be endorsed by the Customs, or other recognized authority, on completion of discharge. One completed certificate must then be forwarded to the Libyan Customs Authorities according to the instructions contained in the "Certificate of Discharge". At least one further copy should be retained on board, to be produced to the Customs on any subsequent voyage to a Libyan port. Failure to produce the certificate may result in delays to loading, or even rejection of the vessel by the Libyan authorities.

PILOTAGE: Vessels to be moored, anchored or manoeuvred will only be boarded within the recommended anchorage area. The Mooring Master will advise the Master on approaches to berths, mooring, unmooring, connecting and disconnecting the hoses and in all operations within the anchorage or berthing area. All manoeuvring of ships shall be done only in accordance with the advice of an Oasis Mooring Master, subject to the understanding that in all cases and circumstances the Master shall remain solely responsible for the safety and proper manoeuvring of the tanker.

Tankers not equipped with pilot hoists shall provide a pilot ladder, or ladders, constructed and placed in accordance with Chapter V 1960 Safety of Life at Sea Convention. Tankers having a large freeboard are requested to use a combination of pilot ladder and accommodation ladder, which is also in accordance with the above Convention.

The Mooring Master shall be in direct control of all tanker communications while in the Terminal area. Any unauthorized communications will result in the immediate cessation of all operations excepting clearing of the berth. Such tanker immediately nullifies its Notice of Readiness.

APPROACHES: Coastal landmarks in the area are as follows:

(*a*) The most prominent landmark is a water tower in the terminal area which is painted white and is 180 ft. above sea level. This water tower is located at 30° 38′ 00″ N. Lat. and 18° 21′ 01″ E. Long.

(*b*) A radio antenna tower which is 624 ft. above sea level is located at 30° 35′ 48″ N. Lat. and 18° 24′ 12″ E. Long. At night the tower is lighted with five red lights, vertically arranged. The top light and the fourth from the top flash simultaneously every second. Lights two, three and five are fixed. (Occasionally only 2 or 3 red lights).

(*c*) A radio antenna tower which is 395 ft. above sea level is located at 30° 36′ 56″ N. Lat. and 18° 16′ 55″ E. Long. At night this tower is lighted by an occulting red light, flash two seconds, eclipse one second, and there is a fixed red light halfway up the mast. It is flanked by two dish shaped aerials.

(*d*) There is a water tower at Ras Lanuf Terminal with a highest elevation of 179.5 ft. above sea level located at 30° 30′ 42″ N. Lat. and 18° 32′ 22″ E. Long. It is white in colour. A white light, characteristics:– flash two every 5 seconds, height above sea level 163 ft., is mounted on the seaward side. There is also a fixed red air warning light on the top of the structure.

(*e*) An omnidirectional aircraft radio beacon is situated at 30° 37′ 29.8″ N., 18° 21′ 07.7″ E. transmitting "OJ" 5 times every 60 seconds.

Range lights and mooring buoy marker lights will appear and disappear with unscheduled frequency. These lights are for the use of the Mooring Masters at the Terminal and should be disregarded by any tankers using the Terminal.

ANCHORAGE: Recommended anchorages at Es Sider within the seaward perimeter of a circle having a radius of 3,000 ft. centred at 30° 40′ 20″ N. Lat. and 18° 24′ 30″ E. Long. The anchorage area has a sandy bottom with a depth of approximately 100 ft.

Ships can make this anchorage with Radio Tower "B" bearing 183° in 16 fathoms. Great care should be taken approaching anchorage from the North or Northwest to give mono-moorings a wide berth.

MAX SIZE: The following are the approximate berth limitations:–

	Length	*Draft*
No. 1 Berth	920 ft.	51 ft.
No. 2 Berth	890 ft.	51 ft.
No. 3 Berth	950 ft.	51 ft.
No. 4 Mono Mooring	1150 ft.	62 ft. 6 in.

Max. beam 158 ft. Max. d.w.t. 250,000

Note: The max. length overall is 1150 ft. The max. draft to which vessel can load in good weather is 62 ft 6 ins., and when vessel lies within 30° of loading line. During adverse weather causing vessel to roll and pitch, draft may be restricted to 58 ft. The max. draft limitation in good weather is due to depth to top of loading line being 63 ft. at distance of 1900 ft. from buoy.

Length, beam and d.w.t. could all be extended provided draft does not exceed 62 ft 6 ins.

All the above limitations are based upon standard tankers in normal weather conditions.

Oasis reserve the right to vary the above limitations, depending on vessel's freeboard, (OBO's – ore/oil vessels, etc.) and also the prevailing weather conditions.

RADIO: Oasis maintains direct communication with Tripoli Radio, details of which are shown in publication 205 of the U.S. Hydrographic Office and are included in the Berne Lists. Oasis also maintains a VHF station at Es Sider Terminal.

Cables should be addressed to: Oasisoil Tripolilibya. Cables addressed in this manner will be received directly by the Oasis communications centre in Tripoli and relayed immediately by voice radio or teletypewriter to the terminal at Es Sider.

Within 6 hours of clearing its last port for its voyage to Es Sider, each tanker shall provide the Terminal with the following information by cable addressed to Oasisoil Tripolilibya:

(*a*) The name of the tanker.
(*b*) The name of the port from which the tanker last cleared.
(*c*) The date and hour of the ETA at Es Sider Terminal.

When the Master of the tanker en route to Es Sider is of the opinion that his tanker is within 72 hrs. of arrival at Es Sider, he shall notify the Terminal by cable addressed to Oasisoil Tripolilibya, providing the following information:

(*a*) The name of the tanker.
(*b*) ETA at Es Sider.

When the Master of the tanker en route to Es Sider is of the opinion that his tanker is within 24 hrs. of arrival at Es Sider, he shall notify the Terminal by cable addressed to Oasisoil Tripolilibya, providing the following information:

(*a*) The name of the tanker.
(*b*) ETA at Es Sider.

When the Master of the tanker en route to Es Sider is of the opinion that his tanker is within 12 hrs. of arrival at Es Sider, he shall notify the Terminal by cable addressed to Oasisoil Tripolilibya, providing the following information:

(*a*) The name of the tanker.
(*b*) ETA at Es Sider.

4 hrs. before the Master expects to arrive at Es Sider to receive a Mooring Master on board, he shall notify the Terminal by cable addressed to Oasisoil Tripolilibya, and also pass the same by VHF radio, providing the following information:

(*a*) The name of the tanker.
(*b*) Precise ETA at Es Sider.

If the tanker is equipped with a FM radio-telephone in the 156–162 mc/s band, communications may be established with the Es Sider Terminal dispatcher by calling on Channel 16, 156.8 mc/s. This frequency is monitored continuously. The range of the Terminal station is approximately 100 miles.

When the Master submits his first ETA to the Terminal he shall indicate the time he expects to need for discharge of ballast.

ARRIVAL PROCEDURE: Tenders to load crude oil cargo will normally be accepted and berths will be assigned to tankers in order of arrival, provided they have valid nominations for cargo and carry clean ballast, if any, and are in all respects equipped and ready to berth. In the event that berthing is delayed on account of weather, tankers will normally keep their position in line. Tankers required to leave Terminal area on account of weather (port closed) shall maintain contact with the Terminal via Tripoli Radio or VHF so they will be available when the weather moderates. Oasis reserves the right to load tankers out of turn following the return of good weather, to the extent that such loading "out of turn" does not materially delay the loading of other tankers in line. Further, Oasis reserves the right to decline to berth a specific tanker if its condition or facilities are unsafe for berthing or loading, even though the Terminal may be open to other tankers. Oasis Marine Superintendent's decision shall be final.

As soon as practical after arrival, all tanks will be inspected for evidence of oil in ballast. Similar inspections will continue during discharge of ballast. If evidence of oil appears at any time, the tanker shall be rejected forthwith and shall not again be accepted until it is shown the ballast can be properly discharged.

If during inspection or during progress of loading it is revealed that tanks are not tight or that oil is leaking from the tanker, it shall be rejected from further loading. Tanker shall not be later accepted for loading unless satisfactory evidence of repair is submitted, duly certified by Lloyds or ABS Surveyors, or other recognized surveyors.

Upon arrival at the Terminal of Es Sider in recommended anchorage, the Master shall give notice of readiness to load by wireless or VHF but not before one or other of the following events shall have transpired:

(*a*) The Master shall have received the Mooring Master on board; or
(*b*) The Master shall have dropped anchor in the anchorage.

However, the notice of readiness shall not be accepted unless the tanker is in every respect ready to load.

In reporting readiness to load, the Master of any vessel arriving at Es Sider for the first time shall state whether the flanges on the manifold of his vessel are such as to permit hose connections without modification.

A tanker shall have sufficient ballast for safe handling. Careful watch of the weather, frequent interchange of information between the tanker and the Terminal and the knowledge of the behaviour of his tanker may permit the Master to bring his tanker with minimum of ballast and thereby reduce the possibility of violating sea pollution requirements.

HEALTH: Tankers shall fly "Q" on arrival by day and display a red light over a white light at night to indicate quarantine conditions.

TUGS: Not required. Oasis maintains launches to assist in berthing tankers. These are under the direct supervision and control of the Mooring Master.

BERTHING: Three open roadstead submarine sea loading berths are available for loading crude oil at flow rates up to 40,000 barrels per hour. These berths are of the seven-buoy type. The berth headings are North. The fourth berth is a mono-mooring buoy with a flow rate of 30,000 b.p.h. In all four berths ships should pick up hoses on the port side.

The central spar buoy of the Easternmost loading berth at Es Sider is located at 30° 38′ 58″ N. Lat. and 18° 22′ 43″ E. Long. The middle of the three loading berths at Es Sider is located at 30° 39′ 06″ N. Lat. and 18° 22′ 06″ E. Long. The Westernmost loading berth at Es Sider is located at 30° 39′ 35″ N. Lat. and 18° 21′ 53″ E. Long. All conventional berths are approximately one mile from shore and in approximately 65 ft. of water. The mono-mooring is located at 30° 40′ 31.5″ N. Lat. and 18° 21′ 43.7″ E. Long. It is about two miles from the shore in approximately 80 ft. of water.

Tankers shall have at least eight good synthetic fibre lines of not less than 9 ins. circumference and at least 120 fathoms in length, with an eye spliced in each end. These lines shall be placed out free for running, three on the after end of the after well deck, and five on the poop deck. The three lines on the well deck shall be married together so that if the need arises the double length can be run on either side of the tanker.

After the tanker is securely berthed, the submarine hose shall be lifted amidships on the port side. The base lift may weigh up to five tons. Hoses shall be lifted and connected by the tanker crew. The Mooring Master shall advise the tanker's officer-in-charge concerning lifting techniques; however, the responsibility for all operations shall remain with the officer.

Mono-mooring: Vessels are normally moored by two bow lines only, these being provided by Oasis. A selection of wire strops and shackles will also be placed on board for mooring purposes. Mooring lines are hove in until the length of chafing chain is brought inboard. According to the mooring arrangements, the Mooring Master will advise on the method of securing the vessel. Ship's wires or ropes may be required to back up mooring equipment supplied by Oasis. Smits towing brackets will be utilized when fitted. Under no circumstances shall the weight of the ship be taken on lead-in ropes.

On advice from Oasis that a vessel is to load on the mono-mooring, she will have the following ready before the Mooring Master boards:

(a) Port side derrick to be rigged ready to lift various wire strops, shackles, and hose securing equipment. This equipment will be placed on board at the same time as the Mooring Master, or as soon as possible thereafter, who will advise on its disposition.

(b) Forward, the vessel should have ready two good synthetic fibre mooring lines, at least 9 ins. circumference, two good 4 in. circumference rope messengers at least 400 ft. long, or two 3 in. wire messengers of the same length, each fitted with a suitable screw shackle. Also a crowbar, spikes and hammers.

(c) No moorings will be required aft.

(d) The vessel shall make a lee on the port side.

It is essential on this berth that the hoses be picked up immediately mooring operations are complete. On advice from the Mooring Master, part of the ship's crew must be standing by at the port manifold for this operation.

Hose lifting and connecting operations are basically the same as in conventional berths, except that hose strings are floating.

Vessel's engines must be ready at all times, and under no circumstances is the propellor to be turned ahead without prior consent of the Mooring Master. Failure to comply with this may result in cessation of operations, and possible rejection as being unsuitable for a single point mooring.

In adverse weather, a continuous lookout may be required on the forecastle head, by a responsible person, to keep watch on the moorings.

In adverse weather the Mooring Master may require cargo to be loaded, in the initial stages, into the forward compartments and this should be complied with when requested.

Vessels are encouraged to load and deballast at the same time where this is possible. In the case of vessels with permanent ballast tanks, this ballast should not be started without first consulting the Mooring Master.

LOADING: Shore Stops: If it is requested by the Master of the tanker that the cargo flow should be stopped from the shore at a predetermined tonnage, it must be clearly understood that Oasis Oil Company of Libya, Inc. will not be held responsible for any error and that in the case of overloading, the excess cargo cannot be pumped back ashore.

Vessels are encouraged to load and deballast at the same time.

BALLAST: There is absolutely no provision at the Es Sider Terminal for dirty ballast. Tankers with dirty ballast shall be rejected and all costs accruing therefrom shall be for the tanker's account.

It is the Master's responsibility to see that no oil of any kind is pumped or spilled overboard from his tanker. This includes oily water from bilges, residuals from previous voyages or any other matter that may result in pollution of the sea. Owners and Masters are invited to examine all laws concerning pollution of the sea, especially in regard to the Mediterranean Sea area. Inspections may be made by the Libyan Ports & Lights Authorities, whose opinion of the cleanliness of the ballast shall be final.

The waters in and adjacent to the Terminal of Es Sider must not be polluted, and only clean oil-free ballast may be discharged anywhere inside of a line 100 miles to seaward and roughly parallel to the Libyan Coastline.

Prior to acceptance all tanks will be inspected for evidence of oil in the ballast and during discharging similar inspections will continue.

Masters are warned that when disposing of dirty ballast outside Libyan waters, all pipe-lines, sea-suctions, strainers and pumps that are later to be used to discharge clean ballast, must be flushed clean so that there will be no chance of even a small amount of pollution when the clean ballast is pumped out.

Any vessel required to return to a position at least 100 miles offshore, for the purpose of discharging dirty ballast, cleaning tanks or for any similar reason, automatically nullifies any Notice of Readiness already tendered and at the same time loses any priority held for loading. On return from sea, vessel will be entered for loading at the time of the second arrival, when a new Notice of Readiness will be tendered.

Master's attention is directed to Es Sider Notices concerning oil pollution and to the serious consequences of discharging dirty ballast, besides having his tanker rejected.

MEDICAL: Doctor will only attend vessel if patient unable to attend clinic ashore. Accommodation ladder required.

FRESH WATER: Not available.

FUEL: Not available.

REPATRIATION: No facilities exist for crew change or repatriation.

TIME: GMT plus 2 hrs.

REPAIRS: When a tanker is in or near the berth, its engines shall remain ready with full power for immediate use. Engine repairs shall not be performed near any berth.

WATCHMEN: Not less than one capable deck officer and three able seamen shall be available on the deck at all times. No person under the influence of alcohol shall be allowed on deck. The Mooring Master's opinion on the sobriety of an individual shall be final.

CUSTOMS ALLOWANCES: Cigarettes, cigars, tobacco, spirits, wines, beers, perfume, arms, ammunition, saccharine, and certain other items shall be placed under Libyan Customs seal from the time of arrival in port until such time as the tanker has left territorial waters. Each officer and crewman is allowed the following ration for each day the tanker is in port: *(a)* 25 cigarettes per day, or 25 grammes of tobacco or 25 grammes of cigars. *(b)* One litre of beer or 0.5 litre of wine. *(c)* Special provisions are sometimes made for the Master.

CONSULS: Consulates are located in Tripoli, which is approximately 650 km. by road from Es Sider. Some countries having Consulates are: Algeria, Argentina, Belgium, Brazil, Chad, Czechoslovakia, Denmark, Finland, France, Ghana, Greece, India, Italy, Japan, Jordan (represented by Indian Embassy), Kuwait, Lebanon, Morocco, Nigeria, Nationalist Republic of China, Pakistan, Saudi Arabia, Spain, Sudan, Syria, Sweden, Switzerland, Tunisia, Turkey, United Kingdom, United States of America, Union of Soviet Socialist Republics, Venezuela, West Germany and Yugoslavia.

GENERAL: When a Mooring Master and his assistants (launch crews and possibly apprentice Mooring Masters) are assigned to a tanker, the tanker shall supply them with meals at the same time and in the same manner as comparable personnel of the tanker. No special meals or special foods shall be required. The terminal will keep this item to a basic minimum. The intent is that the furnishing of meals to Oasis personnel be kept to the minimum.

No boats may be lowered into the water, except in an emergency.

Adequate deck lighting must be available for night mooring and loading. A good floodlight will be required to illuminate the area around the submarine and cargo hose connections during hosing and loading operations. During the discharge of ballast at night, the sea area around the vessel must be adequately lighted. If vessel is berthed on mono-mooring buoy, in addition to the foregoing, lights MUST be provided on forecastle head and over bow to facilitate supervision of moorings.

Stores of any sort shall not be handled while tanker is under "Notice of Readiness". No stores shall be handled while the tanker is in or near a berth.

Use of anchor marker buoys recommended.

Should any tanker or craft become an obstruction in any part of the Terminal or approaches thereto, or in any area of the submarine pipe-line. Oasis shall be empowered and shall have the right to take any steps it may deem necessary to remove the obstruction without notice to the owners. All expenses of such removal shall be borne by the tanker or craft or by those owning it at the time of the accident causing the obstruction, and Oasis shall be entitled to reimbursement by them for any such expenses incurred by it.

Power must be available at all times on all deck winches and on anchor windlass while the vessel is in the moorings.

If mooring wire winches are used, wires should be secured so as to enable them to be quickly let go from the vessel without damage.

Only in an emergency shall the tanker manifold valves be closed against crude flow, and then only with the Mooring Master's consent.

Should communications fail, the cessation of loading may be effected by a continuous sounding of the ship's whistle. This procedure will then stop the loading of all tankers in the area.

The bridge and/or control area shall not be locked nor otherwise arranged to prevent immediate entry at all times by the Mooring Master.

In adverse or marginal weather conditions Mooring Master may request that extra personnel be placed on duty on deck for tending moorings or hoses as required. Masters are advised to comply with this request.

The Mooring Master shall witness the plugging of all scuppers. Failure to plug scuppers shall result in the tanker's rejection.

The presence of unauthorized craft alongside a tanker will render it unacceptable. It shall be the duty of the tanker's personnel to clear all such craft away from the tanker.

When tankers are loading or discharging crude oil or ballast, and while tank tops are open or ullage plugs are open, boiler tubes shall not be blown. Every precaution shall be exercised to prevent sparks escaping through the funnel or stack or from the galley stack. The Mooring Master may demand all fires extinguished if he deems it necessary for safety.

Under the interpretation accorded to the Libyan "Boycott of Israel" Law, it is considered to be a violation thereof if a vessel calling at a Libyan terminal has on board any item of Israeli origin, irrespective of the nature thereof, including but not limited to manufactured products, fruit and vegetables, as well as empty crates, cartons, bottles and paper wrappings, regardless of the country where any of the foregoing was obtained. The law is strictly enforced, and the minimum penalty for violation thereof normally includes a fine and confiscation of all such items. Fines can exceed $1,000.

SHORE LEAVE: None of the officers and none of the crew of any tanker shall be permitted shore leave at Es Sider.

AUTHORITY: Operated by Oasis Oil Company of Libya, Inc. Owned by The National Oil Corporation of Libya, Amerada Petroleum Corporation of Libya, Continental Oil Company of Libya and Marathon Petroleum Libya Limited.

MARSA AL HARIGA: 32.04 N 24.00 E.

(See Plan Book)

(Also refer to "General–All ports").

LOCATIONS: Marsa al Hariga Oil Terminal is located on the South side of the harbour of Tobruk, approximately 1 mile Eastward of Marsa al Hariga.

OPERATORS: Arabian Gulf Exploration Company.

APPROACHES: Vessels bound for the terminal should approach the harbour of Tobruk from the North-East with the lighthouse on Tobruk Point bearing 238° (true). In daylight this lighthouse should be kept in line with the conspicuous German War Memorial on the South side of the harbour.

When about 4 miles from Tobruk Point, course should be altered to 224.5° (true) to bring the leading lights on Marsa Umm esc-Sciausc in line. This course should be maintained until the vessel is close to the outer buoy, where one of the company's Berthing Masters will board.

Deep-drafted vessels sailing from the terminal should avoid navigating North-Westward of the leading line from Marsa Umm esc-Sciausc, owing to the presence of shoal water off Tobruk Point.

DOCUMENTS:

A. Customs Requirements. On the arrival of a vessel, the Tobruk Customs Authorities will require from the Master of the vessel:

4 copies of a Crew List.
2 copies of a List of Ship's Stores.
2 copies of a Declaration of the Crew's Personal Belongings, including currency, cigarettes, gifts, etc.
4 copies of a Passenger List.

B. Harbour Master's Requirements. On the arrival of a vessel, the Tobruk Harbour Master will require from the Master of the vessel:

1 copy of a Crew List.
1 copy of a Passenger List.
1 copy of the Ship's Manifest.
1 copy of a Port Declaration (form will be made available to each vessel on arrival).

PILOTAGE: Vessels coming to and departing from the Terminal will be berthed and unberthed by Berthing Masters provided by the company, subject to the understanding that in all circumstances the Master shall remain solely responsible on behalf of his Owners for the safety and proper navigation of his vessel.

Berthing Masters will board at the Outer Buoy.

ANCHORAGES: If a berth is not immediately available on a vessel's arrival off the harbour of Tobruk, the vessel will be advised by the company where she is to anchor.

Anchorage position for tankers waiting to be berthed is 1.5 miles N.E. of the Outer Buoy.

MAX. SIZE: Two berths are located at the end of a T-head jetty which extends some 700 ft. from the shore. There is a min. depth alongside of 60 ft. and approach to and departure from the berth can be made in not less than this depth of water. Max. draft 52 ft. freeboard at any time whilst deballasting must not exceed 40 ft.

A buoy berth is situated some 1,200 ft. from the shore approximately 1,800 ft. West of the Jetty Berth No. 2. There is a min. depth in the buoy berth and its approaches of 49 ft.

HEALTH: The Libyan Authorities will grant clearance by radio of a vessel coming to the terminal. Radio messages requesting clearance should be sent not earlier than 48 hours prior to vessel's arrival off the harbour of Tobruk and should give the details required in the Maritime Declaration of Health which must also be completed.

COURTESY FLAG: On entering the territorial waters of the Libyan Arab Republic which commence 6 miles off the coast of Libya, vessels should if possible, hoist the Libyan flag, and in any event the Libyan Flag must be hoisted before entering the harbour of Tobruk. Should a vessel arrive without a Libyan Flag on board, one may be obtained from the Company's Berthing Master when he boards at the Outer Bay.

ARRIVAL MESSAGES: In addition to their arrival messages to Agent, vessels must pass an arrival message to the terminal via the company's radio station giving at least 72 hours notice of ETA and advising their estimates of:

(*a*) The quantity of cargo (in long tons) to be loaded at the terminal.
(*b*) The cargo loading rate (in long tons) per hour.
(*c*) The quantity of ballast (in long tons) to be discharged ashore at the terminal.
(*d*) The ballast discharge rate (in long tons).

If, subsequent to advice of their ETA there is any material change, a further ETA message must be passed via the company's radio station.

RADIO: Tobruk Radio 5 A1 (MF & HF). Position: 32° 02′ N. 24° 00′ E. Frequency: 420, 500 A1, A2, 0–5 kW. 4241 kHz at 2130 GMT, 8480 kHz at 1730 GMT, 16963 kHz at 0930 and 1330 GMT. All using A1 0–5 kW.

Note: Station owned by Arabian Gulf Exploration Company. Company telegraphic address: "Injaz Tobruk". All times given are GMT. Station keeps watch on 500 kc/s. during 24 hours.

TUGS: For berthing and unberthing at the terminal, vessels will be required to use the 2 diesel tugs which are available at the terminal. Each of these diesel tugs has a bollard pull of approximately 25 tons.

BERTHING: *Jetty:* Vessels will berth on the jetty starboard side alongside, depending on the prevailing weather conditions, though starboard side alongside is preferred. Each berthing head is "T" shaped and is protected by 4 breasting dolphins.

All moorings, except the backsprings to the outer breasting dolphins at Jetty Berth No. 1, attached to quick release hooks.

Buoy Berthing: Berthing/unberthing in daylight only.

Vessels will berth heading East or West depending on the prevailing weather conditions, though head East is preferred. The moorings consist of four buoys, 1 buoy being on each bow and 1 buoy on each quarter.

In addition to the vessel's mooring of 2 ropes to each buoy, the mooring wires provided by the company to each buoy must be utilised and vessels moored to the satisfaction of the company.

The company's Berthing Master will remain on board the vessel whilst the vessel is in the buoy, to supervise and co-ordinate the ballast discharging and loading operations.

HOSES: *Jetty:* Ship-shore connections, 4 flow booms with suspended rubber hoses, diameter of hoses 12 in. Flange size and rating 12 in. ASA 150. Full range of standard adapters available.

Buoy Berth: Ship-shore connections, 3 flexible hoses, 2 crude oil loading, 1 ballast discharging, diameter of hoses 12 in. Max. lift from ship's equipment 5 tons. Flange size and rating 12 in. ASA 150.

PNEUMATIC OIL BARRIER: Although it is emphasised that all precautions must be taken by vessels to avoid any leakage or spillage of oil into the harbour the berths are each protected by a pneumatic oil barrier to contain any oil which may, due to unavoidable circumstances, get into the harbour waters.

A pneumatic oil barrier consists of a pipe-line which is laid on the harbour bed around the berth. Through this pipe-line is pumped compressed air which escapes from the pipe-line via small holes in it. As a result of this escape, the surface of the water above the pipe-line is forced upward to form a "mound" of water which encloses the berth and prevents any spillage from spreading.

While vessels are berthing and unberthing the barrier will be kept in operation and the disturbance on the surface of the water will indicate the position of the pipe-line. To avoid damage to the pipe-line, it is essential that vessels do not drop their anchors in this vicinity.

BALLAST: Vessels should make every effort to arrive at the terminal with clean ballast and with the minimum quantity for safe handling under prevailing weather conditions.

All ballast must be discharged into shore tanks provided by the company, unless it is clean ballast, carried in tanks which are completely isolated from the vessel's cargo system. However, the discharge of such ballast into harbour waters must not be commenced until the ballast has been inspected by a company official, and he has certified that it is in order to commence discharge.

Ballast can be accepted into the company's store tanks at rates up to 6,000 t.p.h. from the jetty berths and 1,500 t.p.h. from the buoy berth. Ballast is discharged ashore over the jetty by way of a loading boom. Ballast is discharged ashore from the buoy berth through a separate 24-in. ballast discharge line connected to a 12-in. flexible hose. Max. quantity 35,000 tons.

LOADING: Cargo loading at each jetty berth is by means of four 16-in. flow booms to which 12-in. flexible hoses are attached. Cargo loading at the buoy berth is by means of a 34-in. submarine line to which two 12-in. This system permits a max. loading rate of approximately 8,000 t.p.h. over each jetty berth, and 4,000 t.p.h. through the buoy berth. The actual loading rate for a particular vessel will be determined prior to the commencement of loading by agreement between the Master and the Company.

The following signals will be exhibited by a vessel whilst in the buoy berth to indicate the nature of the operation taking place, and to provide a second channel of communication should VHF contact be broken between ship and shore.

	Day	*Night*
Deballasting	Code Flag N	1 green light
Slow loading	1 red flag	1 red light
Full loading	2 red flags	2 red lights
Stop	flags lowered	lights out
Require launch	Code Flag L	signal lamp
Fire emergency	Continuous sounding of short blasts on whistle or siren	

These signals will also be repeated ashore from a mast situated on top of the main administration office building, which is situated opposite the buoy berth.

Jetty: Method: gravity loading, max. head 360 ft. rate regulated to requirements. Loading rates: 2 lines each 4,000 t.p.h. Two 8,000 t.p.h. max.

Buoy Berth: Method: gravity loading, max. head 350 ft. rate regulated to requirements. Loading rate 4,000 t.p.h.

SAFETY: A copy of the Regulations will be given to Master when Company's Berthing Master boards at outer buoy. Masters should make themselves thoroughly acquainted with these Regulations, strict observance of which is required by the Company.

In the event of any infringement of the Regulations, operations may be stopped and, if so, will not be recommenced until the Company is satisfied that appropriate action has been taken by the Master to comply with all the Regulations. The Company also reserves the right to unberth a vessel in the event of a continued or blatant disregard of any of the Regulations. Any loss or expense to the Company resulting from an infringement of the Regulations and, in particular, in the event of an infringement leading to an interruption of operations and/or unberthing of a vessel, will be for the account of the Owners.

FRESH WATER: Not available.

FUEL: Not available.

REPAIRS: No shore facilities for carrying out repairs to vessels either at the terminal or at Tobruk.

CONSULS: No Consulates at Tobruk and the nearest locations of Consular officials are as follows:

Benghazi – 445 kms. from Tobruk: France, Germany, Greece, Italy, Saudi Arabia, Tunisia, United Kingdom of Great Britain and Northern Ireland, United States of America, U.S.S.R.

Derna – 175 kms. from Tobruk: Turkey.

El Berda (Beida) – 260 kms. from Tobruk: Belgium, United States of America.

CUSTOMS ALLOWANCES: Cigarettes, cigars, tobacco, matches, spirits, wines, beer, perfume, arms, ammunition and saccharine have to be locked up under Customs' seal from time of vessel's arrival in harbour of Tobruk until time of departure.

Whilst in harbour, each member of crew allowed following: 200 cigarettes (the Master will be allowed 400); half bottle spirits (the Master will be allowed 1 bottle); 4 bottles of beer or wine per man per day.

No fixed allowances for cigars and tobacco.

Libyan law prohibits vessels from having on board any goods or containers of Israeli origin. Any vessel having such goods or containers on board on arrival in the harbour of Tobruk will be liable to a heavy fine and confiscation of the goods or containers. The Libyan Authorities may, moreover, refuse to clear the vessel.

REGULATIONS:

1. *Ship's Garbage.* Whilst within limits of harbour of Tobruk the throwing overside of ships' garbage is prohibited.
2. *Ships' Radio.* Once vessel berthed at Terminal the use of her radio will not be permitted.
3. *Ships' Boats.* Use of ships' boats not permitted within limits of harbour of Tobruk.

MARSA EL BREGA: 30.25 N. 19.34 E.

Also refer to "General – All Ports".

FLAG: All ships should fly the Libyan flag when inside territiorial limits. They should make sure that they have a Libyan flag on board before leaving the last port of call. Failure to fly the Libyan flag may result in a heavy fine.

Libyan Law does not permit ships using Libyan waters to retain Israeli flags, stores or literature pertaining to Israel on board, even though these may be normally part of the vessel's navigation equipment.

DOCUMENTS: Customs and Immigration officials will board the vessel, except in adverse weather. All relevant documents are supplied by the Mooring Master and on completion of mooring the Master will fill in, sign and stamp the papers. These will then be handed over to the authorities before clearance for loading is granted.

Letters on ships' business should be addressed to Esso Standard Libya Inc., P.O. Box 385, Essofield, Marine, Tripoli, Libya, and should be marked "Marine Documentation Section".

Vessels calling at Marsa el Brega should have the following documents in addition to the ship's register.

Customs and Ports and Lights Authorities Forms:

A. Port Declaration – Form P.L. 7 (1 copy)

B. (Title in Arabic) Inward Report – Form C.L. 128 (3 copies)

C. Cargo Manifest Inward – Form C.L. 1 (3 copies)

D. Report Outwards – Form C.L. 4 (3 copies)

E. Crew Manifest Inwards – Form C.L. 31 (2 copies)

F. Export Manifest Form C.L. 155 (6 copies)

G. Certificate of Discharge for last cargo of Libyan crude. If vessel has not called at a Libyan port since October 18, 1973, then a letter is required from the Master, addressed to the Ministry of Petroleum, stating that he undertakes to mail the Certificate of Discharge, for the present cargo, from the Port of discharge.

It is essential that the certificate of discharge on board the vessel must be clearly signed and stamped by the Authorities at the port receiving the last Libyan cargo. Vessels may incur delays or be refused loading permission where this is not complied with.

Required when ships clear inwards, lists each member of the crew and all goods held (e.g. liquor, cigarettes, cameras, money, etc.) with crew member's signature opposite name or rank. This form is ordinarily supplied in advance so that it may be completed prior to arrival at Brega. Ships making their first call at Brega must necessarily complete after arrival, but will then receive advance forms for future calls.

Cargo ships also require ship's cargo manifest form (3) with same information as C. above.

Ship's Forms required by Customs:

A. Crew List – ship's form (3 copies)

Submitted for inward clearance and containing the following information:

List of crew members, type of vessel, nationality, date of arrival, place from which arrived, destination, and estimated date of departure. Sign and stamp with ship's stamp.

B. Stores List – Ships form (2 copies)

A list of ship's stores required when ship clears inward. Sign and stamp with ship's stamp.

C. Clearance from Last Port – Port's form (1 copy)

Required for inward clearance to load at Brega. Must be properly signed and stamped by officials of port of previous call. There are exceptions on requirement for this clearance dependent on ship, nationality and last port of call.

Other Forms: (Not required of cargo ships)

A. Report of Cargo and Ship's Ullages (original)

B. Tanker Time and Loading Report (original)

(A mimeograph original to be signed by the Master and returned to ship's Agent).

C. Certificate of Cargo Discharge (4 copies)

Master signs and stamps 1 copy at bottom of form, and returns it ashore.

Additional 3 copies are completed by Master at port of discharge and stamped and signed by Customs authorities. 1 copy should then be air-mailed to Ministry of Petroleum, Tripoli. The second copy air-mailed to Marine Superintendent, c/o Essofield. Marine Division, P.O. Box 385, Tripoli, and the third copy retained on board for presentation when the vessel next calls at Brega.

Notes on Ship's Documentation:

Agencies: E.S.L.I. no longer supply an agency service. Vessels should nominate Universal Shipping Agency, which is a government agency for all vessels calling at Libyan oil ports. In the event that Universal Shipping Agency has not been nominated, the Master will be required to sign a letter nominating them before permission to load can be given.

Information required by Esso Standard Libya Inc. prior arrival

The Owner, Charterer or Agent should airmail or cable following to Esso Standard Libya Inc., PO Box 385, Esso Field, Marine, Tripoli, cable address Essoship Tripoli:

(1) Name and flag of vessel.
(2) Dimensional characteristics, e.g. overall length, beam and max. draft.
(3) Total tonnage, number and type of products or cargo on board.
(4) Number and size cargo hose connections on either side and distance in feet of each from the bow.
(5) Safe working load of derricks in vicinity those connections.
(6) Number of shackles of chain (90 ft. shots) on each anchor.
(7) Whether or not VHF fitted.

Information concerning dimensional characteristics need not be included in letter or cable after first call.

LOCATION: Marsa el Brega is located in the South-Eastern part of the Gulf of Sirte in Lat. 30° 25′ 0″ N., Long. 19° 34′ 3″ E. It is an open bay contained between Ras Magdar and an unnamed headland some 3 miles to the West.

The Brega sea buoy is located in Lat. 30° 27.55′ N., and Long 19° 35.1′ E. A bow mooring oil loading fixed structure is located in Lat. 30° 26.0′ N., and Long. 19° 33.9′ E., with a fixed red light exhibited at a height 93 ft. above mean sea level. In addition, the structure is lighted by floodlights. Brega is radar controlled with the shore installation scanner in position 30° 25′ 02.5″ N., and 19° 34′ 55.6″ E. The height of the scanner tower is 112.2 ft. The Radio Beacon is located in Lat. 30° 25′ 00″ N., and Long. 19° 34′ 14″ E. The call sign is "M.B." and it operates continuously on a frequency of 403 kc/s.

A single point mooring is located in position Lat. 30° 26′ 45.26″ N., and Long. 19° 34′ 01.40″ E. A single flare is located in position 30° 24′ 31.9″ N., and 19° 35′ 49.7″ E. Three other flares are located approximately 700 ft. to the West and S.W. The flares when burning can be seen at extreme distances. Numerous lighted and unlighted navigational and mooring buoys are located within the restricted area shown on BA Chart 3350.

PILOTAGE: The services of a Pilot/Mooring Master are provided without charge. He will normally board the vessel in the vicinity of the Brega buoy and will advise the Master on approaches to the berths, mooring and unmooring, connecting and disconnecting cargo hoses, and all other operations within the berthing area. Vessels are cautioned not to enter the restricted area mentioned above without the services of a Brega Pilot/Mooring Master. Pilot ladder must conform to international safety standards.

HEALTH: Quarantine signals must be displayed upon entering Brega port limits in accordance with international practice and shall be continuously displayed until pratique is granted.

ANCHORAGE: Anchorages located 0.5 mile N.E. to East of Brega buoy in 12 to 18 fathoms. *Vessels should not remain at anchor in bad weather.* Vessels not permitted to anchor within 0.5 mile of the channels into the bay and inner harbour.

RADIO: Vessels bound Marsa el Brega not required call Tripoli for inward or outward clearance. Radio messages should be sent through Tripoli (via Malta if beyond communication range of Tripoli) and ETAs should be sent at least 48 hours but preferably 72 hours in advance. Master should state whether ETA in GMT or local time.

Unless 24 hours notice of ETA is received by "Essoship, Tripoli", Notice of Readiness will not be accepted.

As cable office closed between midnight and 0800 hrs., allowance for delays in receipt of radio messages due to this and other causes should be made when sending ETAs and other urgent traffic.

Esso Standard Libya Marine Terminal equipped with short-range Radio/VHF Telephone Port Control System. The following procedure should be adhered to: Vessels approaching Brega and equipped with VHF should call Brega Port Control on Channel 16. Channel 16 is reserved for "Calling", "Safety", "Emergency". When contact made, vessel will be allocated one of the four working channels: Channel 13, Channel 12, Channel 9, Channel 6. Esso Libya's Pilot launch is equipped to operate on these channels. Portable radio sets available for vessels not fitted with VHF.

TUGS: Esso Standard Libya Inc. maintains tugs and mooring launches to assist vessels to moor and unmoor.

BERTHING: Tankers: *Connecting of Cargo Hoses:* All cargo hoses used in the sea berth and at the bow mooring have 12 in. American Standard flanges. The hose used on No. 5 berth SPM has 16 in. American Standard flanges. Raising, connecting, disconnecting, and lowering of the hoses used in all berths will be performed by the ship's crew as advised by the Pilot/Mooring Master who will remain on board while the ship is in the mooring. Vessels should arrive with port derrick topped and ready for use.

Ballast: Esso Standard Libya Inc. has no facilities for the discharge of dirty ballast in Brega. Accordingly, all ships must arrive with clean ballast. International oil pollution regulations must be strictly observed by all ships while in Libyan waters.

Vessels should have sufficient ballast aboard for safe manoeuvring, but should not arrive excessively ballasted. The propellor should be submerged and the vessel trimmed not more than 8 ft. by the stern.

Vessels not properly ballasted will not be berthed in order of arrival and will not have their Notice of Readiness accepted.

Loading and Deballasting Simultaneously: Vessels properly equipped will be encouraged to discharge clean ballast and load oil simultaneously subject to the loading rate being reasonable, and that this procedure does not unduly delay the discharge of clean ballast.

Mooring Ropes: Tankers calling to load at the crude/naphtha sea berth should be equipped with a minimum of eight 10 in. circ. fibre or synthetic mooring ropes in good condition, not less than 120 fathoms in length. Mooring wires of equivalent strength are acceptable. A fibre or synthetic mooring rope in good condition must be available for towing vessels into berths by tug. It is recommended that 3 ropes be ready for use on the main deck. One on each side and one amidships joined to the others.

Crude Tanker Sealine Berths Nos. 1 and 4:

Berths 1 and 4 are now out of service. The crude pipe-lines to these berths are still in position as charted.

Crude Tanker Sealine Berth No. 2:

The least depth of water in this berth is 44 ft. The 30 in. crude line is approx. 8,000 ft. long with one hose string. Crude oil is loaded by gravity or pumps and rates up to 22,000 b.p.h. can be obtained. When berthed the tanker is heading 330° true with both anchors out forward, and 6–700 ft. of chain on each anchor. The stern is secure to 5 mooring buoys fitted with quick-release hooks. The submarine hoses are picked up amidships on the port side of the tanker and the vessel's derricks should have a safe working load of 5 tons.

A naphtha line with a single 12 in. connection is laid in this berth, the shore line being 24 in. In the event that a vessel loads naphtha, then both crude hoses will be taken on board first before connecting the naphtha hose. In good weather, Berth No. 2 can safely accommodate a 65,000 d.w.t. tanker with the following principal dimensions: 65,000 d.w.t.; length, 800 ft.; beam unrestricted, up to 42 ft. draft in good weather. Gravity of sea water about 1030.

Crude Tanker Sealine Berth No. 3 – bow mooring:

The bow mooring is located in approximately 95 ft. of water, and consists of a fixed pylon surmounted by a revolving boom from which hangs a submerged oil-loading pipe arm. The main structure has a diameter of 130 ft. and is 97 ft. above mean sea level at its highest point. The pylon is surrounded by a fender ring which is mounted on vertical steel piles. The revolving boom is 76 ft. in length from the centre of the pylon to the end. The loading arm hangs from a ball joint at the end of the boom and is approximately 560 ft. in length, terminating in a hose handling platform on the outer end. The hose platform is kept at the level of the ship's deck by means of a compressed air ballasting and deballasting system. Four 12 in. hoses hang from the platform. Vessels are normally berthed port side to the platform. Derricks should have a safe working load of 5 tons. A maximum loading rate of 65,000 b.p.h. may be realised with the loading pump in operation.

Vessels are moored in position using 2 head ropes to the bollards on the boom and with two 6 in. nylon back spring mooring lines to the hose-handling platform. In addition, a 6 in. nylon snubber line is used to keep the platform alongside the ship. In bad weather conditions two additional headlines consisting of 12 in. "Samson" nylon are available. Vessels with the following principal dimensions can be accepted: 100,000 d.w.t., overall 1,000 ft., beam unrestricted, draft 48–49 ft., bow to manifold not to exceed 434 ft. Larger vessels may be accepted with prior approval.

Crude Tanker Sealine Berth No. 5 – Single Point Mooring:

No. 5 SPM is located in approx. 140 ft. of water and is in position 30° 26′ 47″ N., 19° 34′ 01.4″ E. The mooring consists of a monobuoy to which are attached 2×15 in. synthetic lines. These are shackled to a single 3 in. chain partly around which is a flotation cover. On the end of the chain is a 9 in. polypropylene line.

Mooring is effected by heaving the polypropylene through the bow as near the centre lead as possible until the chain is on board, and then shackling two 12 in. perlon strops to open links in the chain. The strops and shackles will be placed on board with the Pilot and vessels are advised to have the port derrick ready to hoist the gear on board at that time. The vessel is also required to have a good 3.5 in. to 4 in. messenger line of at least 75 fathoms in length, ready for use on the fo'c'sle head.

The 48 in. pipe-line is approx. 11,850 ft. long, terminating at the underbuoy structure on the seabed. Crude is loaded through one string of self-floating 24 in. hose with one 16 in. over-the-rail hose to the ship's manifold. Vessel's derricks should have SWL of 10 tons and if necessary be double rigged. The weight of a normal lift for connection to the ship's manifold amounts to less than 5 tons. This is for a hose free of oil, which is usually the case. Vessels with the following principal dimensions can be accepted in this berth: 300,000 d.w.t. Length beam and draft unrestricted. Flow rate 48,000 b.p.h.

Berths Nos. 3 and 5:

Vessels entering the restricted area on the approach to, mooring and leaving, these two berths must at all times have their anchors firmly secured. No anchor work may be carried out at any time whilst a vessel is in this area.

Product Tanker Berth:

Tankers loading refined petroleum products to Marsa el Brega will be berthed at the product dock. Products will be loaded through a number of small pipe-lines approximately 2,000 ft. long. 3 in. or 6 in. hoses are provided according to the grades of oil being loaded. Vessels assigned to load at this berth must be suitably equipped with mooring ropes and have derricks capable of lifting 2 tons.

Vessels cannot be berthed or remain alongside the breakwater except in fine weather. The breakwater is equipped with resilient fendering and ample mooring points. Tankers will be berthed by an Esso Standard Libya Pilot/Mooring Master. Two tugs are available, and a launch will run the mooring lines. In good weather vessel with the following principal dimensions can be accepted: Overall length 500 ft., beam unrestricted, draft 26 ft. max.

Gas Docks: Two types of processed gas are loaded in Marsa el Brega: liquefied natural gas (LNG); pressurized liquefied petroleum gas (Press. LPG).

These are loaded on 2 piled berths situated on the Southeastern part of the harbour.

There are dolphins to head, stern and breast lines.

The springs are secured to the central pier and in addition springs from the pier are also made fast. Vessels alongside the gas jetties must be ready to leave at short notice.

On the North or "A" jetty the following products are loaded: Press. LPG and LNG. On "B" jetty: Press and LNG. There is also a caustic facility on "B" jetty. Minimum depth alongside the gas jetties is 37 ft.

Acid Dock:

There is a small berth to deal with sulphuric acid.

Dry Cargo Dock:

To nominate vessels, carrying cargo for Esso Standard Libya, for direct call at Marsa el Brega, prior approval must be obtained from Esso Europe Inc., Traffic Coordination, 50 Stratton Street, London, W.1., England. Telex No: EURESSPUR, 21221/5. The approval of the Operations General Manager, Brega, is required for any other vessel.

Notice of ETA Port Brega must be given 72, 48 and 24 hours prior to the vessel's arrival. Master of vessel should also advise number of stevedore gangs required.

A Roll-on/Roll-off facility can be used by suitable vessels at times when the product jetty is not occupied. Vessels dimensions should not exceed those described above for the product jetty.

Vessels assigned to discharge dry cargo at Marsa el Brega will be berthed alongside the dry cargo dock by an Esso Standard Libya Pilot/Mooring Master. The min. depth alongside and in the approach is 30 ft. Two tugs are available. A mooring launch will be available to run mooring lines. The dry cargo dock is fitted with resilient fendering and ample mooring points. During Winter it may be necessary to leave the berth during bad weather, and the Master is responsible for any damage sustained by the jetty and/or his vessel. A Pilot/Mooring Master will be standing by at all times.

All mooring ropes should be in good condition and none should have more than one short splice in the useable length. Crew shall keep the moorings tendered and properly lighted day and night. Shore ropes are also available when necessary.

Ships shall provide their own gangways and the crew shall keep them lighted and tendered, day and night. Ships must be equipped with adequate unloading gear. All cargo will be off-loaded with the use of ship's gear. When weather permits, derricks should be topped at sea prior to arrival. Due to the increase in cargo vessels calling at Brega, considerable delay may be experienced. Vessels carrying Esso cargoes have priority over all other vessels.

The length of the dry cargo dock is 650 ft. The max. size ship which can be accommodated is 500 ft. overall, beam unrestricted, *max. draft 26 ft.*

MEDICAL: There are limited medical and no dental facilities at Marsa el Brega. Personnel requiring urgent medical treatment may obtain it, but this will only be undertaken in serious cases. Masters of vessels arriving at Marsa el Brega who require medical treatment should give advance notice of their requirements by radio whenever possible.

FRESH WATER: No fresh water is available.

FUEL: No bunkers are available.

REPAIRS: No repairs are allowed to ship's engines while vessels are moored in the berths. Ship's engines should be ready for use on short notice in case the vessel has to vacate the berth suddenly because of bad weather. There are no repair facilities for ships available at Brega.

REPATRIATION: Crew members cannot pay off or leave the vessel at Marsa el Brega except in cases of emergency. Even in an emergency, it should be noted that seamen's Books are not valid under the Libyan law. A valid passport is required, and with adequate notice by radio it is possible to obtain an exit visa for a crew member leaving in an emergency.

SHORE LEAVE: Passengers and crew members are not permitted to land for reasons other than emergencies.

PORT REGULATIONS:
Cargo vessels:
The following restrictions, conditions, rules and priorities shall be observed by Masters, Consignees and Agents of Non-Esso cargo vessels calling at Marsa el Brega.

1. The permission of the Operations General Manager must be obtained before a non-Esso cargo vessel can discharge. The Operations General Manager also designates certain priorities which may change from time to time. Agents of cargo ships must keep in touch with Marine Superintendent who will advise them of the priority assigned to their vessel.
2. Maximum vessel draft 26 ft.
3. Maximum length overall 500 ft.
4. No repairs may be carried out to the propulsion machinery during the unloading operation and the ship must remain mobile and be ready to manoeuvre at all times.
5. Vessels must be equipped with their own unloading Gear.
6. Unloading must be from ship to truck and no marshalling arrangements can be made available inside the reserved area. The unloading operations must be completed rapidly.
7. Unloading operations may not be performed except during daylight hours as determined by the Marine Superintendent.
8. Loading trucks will be required to adhere strictly to Esso's safety rules, particularly while operating within the limits of the Industrial area.
9. Arrangements for the entrance and movement of the stevedoring personnel must be coordinated with Esso's Industrial Security Division. No housing or victualling will be provided for stevedoring personnel. All expenses, costs, remunerations and compensations associated with this activity will be borne directly by the company concerned.
10. The stevedores will be held responsible for cleaning up after completion of unloading.
11. No victual, water supply or bunkering service is available for vessels calling at Brega.
12. Advance notification must be given to Esso's Marine Division at least 10 days prior to arrival of vessel at Marsa el Brega. ETA of vessel to be notified 72 hours prior to arrival and confirmation and reconfirmation 48 hours and 24 hours respectively prior to arrival.
13. A system of priorities for cargo vessels entering Brega is in operation as follows: 1st – Esso cargo, 2nd – N.O.C. and contractors' cargo, 3rd – other vessels. This system will apply even though this requires interruption of operations of vessels already berthed.
14. Weather and sea conditions, particularly during the period December to April of each year, impose severe restrictions on the cargo pier usage. Among these restrictions are the discontinuation of unloading and the unberthing of the ships as a safeguard against ship and berth damage.

One hour's notice will be given to Masters should it be deemed necessary to vacate the berth due to bad weather.

15. Esso shall not be held reponsible for any waiting period or delay (demurrage) related to the entry of cargo ships, nor be liable for any costs or compensation in that connection, regardless of the circumstances.
16. Esso shall not be held liable for any loss, damage or injury that may occur to any property or persons whatever the cause thereof as long as they are related to or resulting from the use of the port. Such loss, damage or injury shall be the liability of the Master, Consignee or Agent irrespective of whether they are real or alleged. The above named shall also undertake to indemnify Esso for any such losses and damages and to hold Esso harmless from any liability that may arise as a result thereof.
17. All vessel movements will be subject to the control and direction of Esso's Marine Division Superintendent.

GENERAL: *Provisions:* There are no fresh or dry provisions available at Marsa el Brega, and Esso Standard Libya cannot undertake to obtain supplies from Benghazi.

Mail: The Ship's Agency will handle all official and crew ship's mail which should be passed to the Mooring Master before the vessel sails.

Harbour Work: Dredging is in continual progress in the vicinity of the inner harbour. Vessels are cautioned not to enter the restricted area (B.A. Chart 3350) without the services of a Brega Pilot/Mooring Master.

Master of cargo/product vessels calling at Marsa el Brega are cautioned that seaweed in suspension is present in the inner harbour area, and all precautions should be taken to avoid blockage of main engine room intakes.

All offshore loading is controlled by the VHF ship/shore radio. The Mooring Masters are equipped with portable VHF sets and the vessel will be assigned a frequency when the Mooring Master boards. In the event of total failure of ship/shore radio communication during loading, the ship should sound the emergency signal comprising a succession of short blasts on the ship's whistle. All loading operations will then cease until radio contact with the shore has been re-established.

DEVELOPMENTS: Work on the Eastern side of the harbour, comprising a new breakwater and facilities for the export of ammonia, methanol and urea are in the process of completion. A cargo jetty has been incorporated into the complex with a frontage of 1,000 ft. Limited movement of methanol and ammonia is in progress. On completion, it is hoped to be able to berth tankers of up to 36 ft. draft and 700 ft. length overall. The minimum depth in the new complex is designed to be 42 ft. 6 ins.

AUTHORITY: Esso Standard Libya Inc.

QASR AHMED (Misurata): 32.22 N. 15.13 E.

(See Plan Book)

GENERAL: The first stage of the harbour will be opened to the traffic in June 1978. The harbour is enclosed by 2 rubble mound breakwaters armoured by tetrapods. The North breakwater extends 1,400 m. due East from Ras Zarrugh Lighthouse and East breakwater extends 1,800 m. due North from the shore near the prominent radio station about 2 km. South of the North breakwater. There are lights on the breakwater roundhead. On the North breakwater a white flashing light (0.5 sec.) every 5 secs. The Ras Zarrugh lighthouse at the foot of the North breakwater is a square tower with black and white vertical stripes surrounded by a white metal framework. The structure is 8 m. high and is on the top of a 16 m. hill. The light is flashing white (0.5 secs.) every 5 secs. with a range of 8 miles.

There is a radio mast 7.6 miles W.N.W. of Ras Zarrugh with fixed red flashing lights. Harbour entrance leading lights are not yet installed. The harbour entrance channel is 150 m. wide dredged to a depth of 12 m., it has a fairway buoy 500 m. outside of the entrance with radar reflector, fog bell and white light flashing (0.3 sec.) every 3 secs.

Inside the entrance there is turning circle, diameter 470 m. dredged to 12 m. and marked with 4 buoys with white lights flashing (0.1 sec.) every 1 sec.

Inside the harbour a dredged area 920 m.×200 m. to a depth of 11 m. leads due South alongside the berth.

Directions: Keep 2–3 miles offshore before turning due West for entrance.

Currents: Predominantly N.W. at mean rate of 0.5 to 0.75 knots but in Winter winds can reverse the flow and induce S.E. set in excess of 1 knot.

PILOTAGE: Compulsory, Pilot will board about 1 mile outside the port entrance.

ANCHORAGE: Bearing approximately 270° to lighthouse on Ras Zarrugh 13 m. depth 1 mile (2 km.) offshore but holding ground is poor and it is advisable to leave anchorage at signs of onset of bad weather.

RADIO: A temporary VHF radio station will be operated on Channel 16.

BERTHING: There are 6 berths totalling 1,120 m. of concrete quay dredged to 11 m. with timber fenders and bollards at 150 m. intervals, the quay deck is at elevation of 2.25 m. The berths include a Ro/Ro facility.

CRANES: Shore crane of 50 tons available and in the near future floating cranes of 100 tons will be available.

FRESH WATER: Available alongside and by barge.

FUEL: Not available.

MEDICAL: Facilities available. There are hospitals in the town of Misurata 12 km. from the port and a first aid post in the harbour.

STEVEDORES: See "Tripoli".

REPATRIATION: Possible.

AIRPORT: Tripoli Airport situated about 220 km. from Misurata.

CONSULS: Nearest consuls are at Tripoli.

SERVICES: All kinds of food and soft drinks are available except alcoholic drinks and pork.

SHORE LEAVE: Allowed after free pratique, customs and immigration formalities completed.

REPAIRS: See "Tripoli".

POLICE/AMBULANCE/FIRE: Call Port Manager Tel. 21101 & 21094.

SHIPMASTER'S REPORT: December 1977.

Chart: British Admirality Chart No 3353 "Ras Ashdir to Sirte".

A mole has been constructed from Ras Zorog in an East direction, the length of which is approximately 1,100 m.

A second mole extends from the shore in a Northerly direction, approximately 1,800 m. in length. Entrance to the harbour is between the outer ends of both moles.

Wharves and sheds are being built along three quarters of the length of the Northerly direction mole, and around the South part of the inner harbour perimeter. At the time of the visit by this vessel about 350 m. of quay was completed, with depth alongside of 11 m.

All the construction work appears to be done by Yugoslavian labour. The "Overseer" acted as Pilot and was a very able and pleasant person. All questions regarding cargo and fresh water, provisions, etc were dealt with by him. He supplied 10 tons of fresh water by road tanker, and organised a visit from a ships' chandler for a small quantity of fresh salad and potatoes.

There are two small tugs which were used in berthing under the Pilot's direction. These were very necessary owing to a number of obstacles in the harbour (divers boats, pipes, etc.). The Pilot's knowledge of English was limited and it is most necessary for the ship's Master to judge his intentions carefully.

Without a doubt the port of Misurata when open for commerce will be a very useful port, although a small port (inside harbour space was roughly estimated to be about 1,500 × 700 m.). The Pilot advised that it was expected to be opened about the middle of 1978.

The vessel anchored off the port entrance at 0800 hrs. and Pilot boarded at 1100 hrs., vessel berthed shortly afterwards. Discharge of 208 tons of construction material from No.1 hold commenced at 1330 hrs., and ceased at 2400 hrs. for the day. Work resumed at 0930 hrs. on the following day, and was completed at 1330 hrs. A mobile shore crane was used throughout for discharge into lorries. All labour was Yugoslavian.

All Agency work was attended to by our Tripoli Agent, who arrived onboard at 1700 on day of arrival. As Tripoli was our next port, he was most helpful in advising our berthing prospects at that port, and delivering ship's mail.

The entering and clearing formalities were attended to by two Customs Officers. They advised that there was strictly no shore leave for the crew. All accommodation was diligently searched including the Master's for alcohol, and none whatever was allowed to be in crew's possession. However when all was found to be in order, on request a small amount of bond stores was released for Christmas.

The vessel departed at 1600 hrs. for Tripoli where the Agents estimate of 2 – 3 days waiting (although there were 50 ships at anchor) proved to be correct.

SHIPMASTER'S REPORT: March 1978.

As will be noted on the Plan, work is still in progress on the Southern Mole. More warehouses are to be erected there, also a grain silo. On the Western shore of the harbour more berths are to be constructed possibly for containers, but nothing is finalised yet.

Misurata is to be principally a Ro/Ro port specialising in transit cargoes. A nearby motorway runs in a Southerly direction for 1,000 miles into Central Africa.

There will be facilities for conventional cargoes. Dredging is in progress in the Western part of the harbour in preparation for the new berths. The area is being marked by red marker buoys. The port is scheduled to open in June/July this year and to date there are no services excepting Customs who attend to all the Entering and Clearing formalities. All pilotage being performed by the Master, the contractors work boats will act as tugs if requested.

Documentation is similar to requirements for other Libyan ports also the same strictness regarding alcohol. All Officers and Ratings were allowed to retain a small quantity of beer, all other alcoholic drinks being placed under Seal.

AUTHORITY: Port Manager and Harbour Master.

RAS LANUF: 30.31 N. 18.35 E. (See Plan Book)

(Also refer to "General All Ports").

Sirtica Terminal

DOCUMENTS: Customs will require:

4 Crew Lists.
1 Crew Declaration of personal belongings (including cigarettes etc.)
2 Stores Lists.
1 Passenger List.

Crew Lists and Crew Declaration of personal belongings must be on the approved Libyan Government Documents. Vessels are advised on their initial visit to the port to obtain sufficient forms for future visits. Also required are:

6 Copies of Cargo Manifest for Ras Lanuf Discharge.
1 Copy of Cargo Manifest for transit cargo with a summary.
1 Copy of Passenger Manifest.

A copy of a certificate of discharge of the last cargo loaded at a Libyan port is required. Said certificate to be duly signed and stamped by Custom Authorities at the discharge port. Blank forms will be delivered with the cargo documents.

Clearance from the last port of call will be required by the Government authorities. The police will require 4 copies of a Crew List and a Passenger Manifest if any passengers on board.

PILOTAGE: It is most important that ships establish communications with the terminal not less than 72 hours prior to arrival, giving estimated time of arrival. Further ETA signals should be sent when the vessel is 24 hours, 12 hours and 4 hours distant or any time a change of 1 hour in original ETA occurs. These messages should state specifically whether ETA is given in GMT or local time. The 72-hour signal should include the following: ETA, last port of call, if any sickness on board and if vessel has clean bill of health. Cargo quantity and grades expected to be lifted in net long tons at 60°F. The 12-hour signal should include definite indication as to whether the vessel is ready to load or not and should also include information on the time she will require to discharge ballast after arrival. Precise time of arrival should be given when the ship is 4 hours distant from the terminal.

Vessels to be moored at Ras Lanuf will be boarded by Mooring Master in the close vicinity of the suggested anchorage area mentioned below. The Mooring Master will advise the Ship's Master on approaches to berths, mooring, unmooring, connecting and disconnecting the hoses and in all operations within the mooring area.

Terminal sea buoy, colour red with radar reflector and bell is located in approximately Lat. 30° 32′ 40″ N. Long. 18° 34′ 38″ E. Vessels in the vicinity of the port should not navigate or anchor inside of a bearing 120°–300° running through this buoy position.

ANCHORAGE: Suggested anchorage area is within a 3,000 ft. radius of position Lat. 30° 33′ 00″ N., Long. 18° 35′ 40″ E. in approximately 90 ft. of water.

MAX. SIZE: Conventional berths: up to 60 ft. draft; up to 130,000 d.w.t.

Single Point Mooring: up to 75 ft. draft, up to 265,000 d.w.t.

HEALTH: By day – fly flag "Q" and by night display red light over white light for Quarantine Service.

Libyan Customs, Federal Police and Immigration Officials will board the vessel as soon as possible after arrival to give inward clearance and "pratique" services. Libyan Government Regulations are strictly enforced. The vessel should have a clean Bill of Health or equivalent document from the last port of call. The vessel's Master and all members of the crew shall possess International Certificates of Health showing valid smallpox Vaccination Certificates.

RADIO: Direct communication by radio between ship and shore is by VHF International Maritime Mobile Radio-telephone Service to Ras Lanuf Oil Movements Control Centre. All communication between ship and terminal should be by way of this station. ETA messages to Mobilpro, Tripoli, Libya, via Tripoli Radio (call sign 5AT). Ras Lanuf Oil Movements Control Centre keeps continuous watch on VHF Radio-telephone Channel 16 (156.80 mc/s), Channel 14 (156.70 mc/s) and Channel 11 (156.55 mc/s). Vessels approaching the port should make contact on Channel 16 when shore will request her to switch to Channel 14. This Channel will also be used by terminal Marine Section for internal use and tanker mooring control. Channel 11 is reserved for communications between ships in mooring and Terminal Oil Movements Control Centre and should only be used for general purposes after obtaining clearance from Oil Movements Control on Channel 16. This is a safety measure since oil flow to ships is controlled through Channel 11 and therefore it must be clear at all times in case of need to stop oil flow for any cause. Channel 16 is for calling and safety use only.

TUGS: Not required. The company maintain launches to assist in mooring and unmooring vessels. These are under the direct supervision and control of the Mooring Master.

BERTHING: There are 4 submarine loading pipe-lines which terminate in the following approximate positions which are each marked by an unlit white spar buoy.

Berth No. 1: Lat. 30° 31′ 35″ N., Long. 18° 34′ 37″ E., from which a submarine pipe-line runs to shore on a bearing of approximately 224°. Depth of water at spar buoy 70 ft.

Berth No. 2: Lat. 30° 31′ 55″ N., Long. 18° 33′ 58″ E., from which a submarine pipe-line runs to shore on a bearing approximately 197°. Depth of water at spar buoy 70 ft.

Berth No. 3: Lat. 30° 32′ 18″ N., Long. 18° 33′ 19″ E., from which a submarine pipe-line runs to shore on a bearing of approximately 198°. Depth of water at spar buoy 73 ft.

Berth No. 4: Lat. 30° 31′ 50″ N., Long. 18° 36′ 06″ E. – a Single Point Mooring buoy in 95 ft. of water.

Raising, lowering, connecting and disconnecting of submarine hoses, as well as all other labours and duties on shipboard, will be performed by the ship's crew under direction of the Mooring Master.

LIFTING HOSES: After the vessel is securely moored the submarine hose will be hoisted on the port side. Berths No. 1 and 2 are each equipped with 2×12 in. loading hoses, the weight of each hose lift being approximately 5 long tons. Berth No. 3 is equipped with 2×12 in. loading hoses the weight of each hose lift being approximately 5.75 long tons. Therefore, all lifting equipment and tackle should have a safe working load of at least 6 long tons. Hoses are lifted by ship's gear and crew, and all connecting of hoses will be done by them. The lifting derrick, equipment, tackle, etc., should be topped off and ready on arrival.

The SPM is equipped with two 16-in. loading hoses.

MEDICAL: No medical services (except in case of emergency and subject to a doctor being available) or other services are to be expected at Ras Lanuf.

FRESH WATER: Not available.

FUEL: Not available.

REPAIRS: When a ship is in the moorings or vicinity, its engines must remain on standby with full power for immediate use. Deck machinery shall be kept in instant readiness. *Positively no repairs of any sort will be permitted in the moorings.*

CUSTOMS ALLOWANCES: Cigarettes, cigars, tobacco, matches, spirits, wines, beers, perfume, arms, ammunition, saccharine and possibly other items have to be locked up under Customs seal from time of arrival of ship in port until time of leaving territorial waters. Each person is allowed 25 cigarettes per day of stay or 25 grams of tobacco or cigars in lieu. Each man allowed 1 litre of beer or half litre of wine per day. Special allowances are made for Master under special circumstances.

CONSULS: The only consulates are located in Tripoli which is 670 km. by road from Ras Lanuf. These consist of U.S.A., British, Danish, Dutch, French, German, Greek, Indian, Italian, Norwegian, Spanish, Russian (U.S.S.R.), Turkish, Yugoslavian.

REPATRIATION: Crew members cannot pay off or leave the vessel at Ras Lanuf except in cases of extreme emergency. Even in an emergency it should be noted that Seamen's Books are not valid under the Libyan law. A valid passport is required.

BALLAST: Positively no provision is made for dirty ballast. Any ship arriving with dirty ballast will be rejected and all costs accruing therefrom will be to the ship's account. Notice of readiness shall not be accepted until vessel returns with clean ballast and tanks fit to receive cargo. She will on second arrival tender a new notice of readiness to load.

TIME: Libyan local time is GMT plus 2 hours.

GENERAL: No stores, foodstuffs or goods whatsoever of Israeli origin may be on board any ship calling at Ras Lanuf.

Penalties: Fine, confiscation of goods and possibly more. The Libyan Government strictly enforces this law.

Whilst arriving fly the Libyan Ensign (plain green).

Due to the existence in these waters of the fish commonly called "Weaver" fish, ship's crew are urged to exercise extreme caution in fishing whilst lying off the port area. There have been several cases of poisoning by these fish, all of which were distressingly painful, caused by contact with the fins.

SHORE LEAVE: Not allowed.

AUTHORITY: Mobil Oil Libya Limited, Tripoli.

TOBRUK: 32.04 N. 24.00 E.

Also refer to General – all ports.

PORT LIMITS: The complete water area existing within Tobruk Bay or that water area existing to the West of an imaginary line commencing as from Tobruk Peninsula up to the coast to the South.

It is formed of 3 areas inside the Bay, namely Marsa Tobruk, the proposed naval base and Marsa Al-Hariga Oil Terminal.

MAX. SIZE: Max. draft: 29 ft., max. length: 400 ft.

RADIO: Tobruk Radio (Station operated by Arab Gulf Oil, Operating times 0900/0930, 1300/1330, 1700/1730, 2100/2130 hrs.) 5AL: 420, 425 and 500, VHF (24 hours) Channels 12, 16 and 19.

BERTHING: Berths in Tobruk Harbour:

Quay No. 3: Length 82 ft. draft 11 ft.

Quay No. 4: Berth 1: length 560 ft. draft 20 ft.
Berth 2: Length 395 ft. draft 28 ft.
Berth 3: Length 410 ft. draft 30 ft.

TANKERS: Refer to "Marsa Al Hariga".

STEVEDORES: All stevedoring operations and formalities to be done by Agents. 2 companies to be formed in the near future.

MEDICAL: Available.

FRESH WATER: Not Available.

FUEL: Not available.

REPATRIATION: Available via Benghazi.

DEVELOPMENTS: Port extension project under study.

REPAIRS: Not available; see "Tripoli".

AUTHORITY: Port Manager and Harbour Master.

TRIPOLI: 32.54 N. 13.13 E.

Also see "General" before first port.

PORT LIMITS: (a) The water area existing inside the actual breakwater and that which may fall within any new breakwaters eventually constructed in accordance with the Port Developments Project.

(b) The outer water area known as the navigational channel commencing as from the harbour entrance along the distinguishing marks of the channel for a distance of about 1 mile.

RESTRICTIONS: Any containers arriving on ro/ro ships should be on trailers.

MAX. SIZE: All types of ships with 27 ft. draft and less are safe in harbour.

RADIO: Tripoli Radio (coast station — 24 hours), 5AT, 476 and 500 kc/s, R/T 2182 and 2197, VHF Channels 16 and 6.

Tripoli Port Radio (24 hours), 5AI, 500 kc/s, R/T 2182, VHF Channels 10, 12 and 16.

BERTHING:

	Quay No.	*Length ft.*	*Depth ft.*
Main Port:	5.5	200	11
	6 East	200	13
	6 West	220	13
	7	400	18
	8	400	22
	9	400	23
	10	450	22/25
	11, 12 & 13	930	22
	Victory	550	22
	F.J. STB.S.	200	10
	F.J. PT.S.	200	9
	Japanese	4,823	19.7
Karamanly:	1 & 2 (oil)	450	27
	3	400	22
	4	400	18
	5	300	15
	F.J. STB.S.	250	14
	F.J. PT.S.	250	16.5

STEVEDORES: Two companies available.

CRANES: Electric floating crane available up to 100 tons.

MEDICAL: All facilities available.

FRESH WATER: Available by barge and alongside, should be obtained from Port Authority through ship's Agent.

FUEL: Available through Agent. A notice of 24 hours needed, advisable for Chief Engineer to check what grades are available.

REPATRIATION: Crew changes are possible.

AIRPORT: A number of major air lines operate to and from Tripoli airport which is about 27 km. from the city.

DEVELOPMENTS: Port extension project under construction.

WATCHMEN: Available.

CONSULS: Algeria, 34631; Belgium, 37797; Bulgaria, 35733; China, 32300; Denmark, 39413; France, 33526 & 33527; Germany, 33827 & 30554; Pakistan, 40072; Poland, 31768; Saudi Arabia, 30486; Spain, 35463 and 33275: Sudan, 39181 and 39182; Sweden, 32343; Switzerland, 32416; Greece, 36978 and 36689; India, 41835; Iraq, 34235; Italy, 34131; Jordan, 32707; Kuwait, 40282 and 40281; Lebanon, 33733 and 32289; Malta, 38081 and 38082; Morocco, 34239 and 40188; Netherlands, 41549 and 41550; Syria, 31783; Tunisia, 31051/2; Turkey, 37728; U.S.S.R., 30554; U.K., 31191/5; U.S.A, 34020 to 34029; Venezuela, 36838; Yugoslavia, 34114 & 33392.

POLICE/AMBULANCE/FIRE: Main port call; 39111, 35010, 31518. Karamanli wharf call: 30378, 35010, 31518.

SHORE LEAVE: Allowed after free pratique, custom and immigration formalities completed.

DRYDOCK: *Floating Dock:*

Length over platform	136.700 m.
Length over pontoon	121.200 m.
Moulded outer breadth	30.600 m.
Inner clear breadth	23.400 m.
Depth of pontoon at CL	3.100 m.
Height of keel blocks	1.200 m.
Depth of water above KB	6.400 m.
Lifting capacity	5,000 tons

Spare parts to be supplied by ship's owner. 3 kinds of marine paint are available.

AUTHORITY: Port Manager and Harbour Master.

ZUARA: 32. 55 N. 12.07 E.

Also see "General" before first port.

PORT LIMITS: a) The water area existing between the actual breakwater and that which may fall within any new breakwater eventually constructed.

b) The water area known as the navigational channel existing outside the harbour entrance for a distance of about 0.5 miles (1 km.).

RESTRICTIONS: Port for ships laden with direct delivery cargo only.

MAX. SIZE: Ships up to 13 ft. draft and 65 m. length are safe in the harbour.

RADIO: Tripoli Radio and Port Radio use VHF Channel 16.

BERTHING:

Quay No.	*Length*	*Depth*
Shore quay	2 ships	13 ft.
F.J. Stb.S.	165 ft.	13 ft.
F.J. Pt.S.	165 ft.	13 ft.

STEVEDORES: 2 companies available.

MEDICAL: Available.

REPATRIATION: Possible

AIRPORT: Tripoli Airport situated about 127 km. from Zuara.

DEVELOPMENTS: Port extension project under study.

CONSULS: Nearest consuls are at Tripoli.

REPAIRS: Not available, see "Tripoli".

POLICE/AMBULANCE/FIRE: Call Port Manager, Tel: 025305.

SHORE LEAVE: Allowed after free pratique, custom and immigration formalities completed.

AUTHORITY: Port Manager and Harbour Master.

ZUEITINA: 30.51 N. 20.00 E. (See Plan Book)

(Also refer to "General – All Ports")

LOCATION: The Terminal Light float, moored in position 30° 56′ 00″ N. 20° 00′ 00″ E., has a red hull with a red tower; it shows at night a white light flashing "Z" every ten seconds. A prominent landmark is the radio mast (height 451.5 ft. above sea level) in position 30° 49′ 57.6″ N. 20° 03′ 05.5″ E.; it displays at night three red lights in a vertical line – the top light flashing, the two lower fixed. The top light is on top of the mast (which is 400 ft. above the base), the middle light is 266 ft. above the base, and the lowest light is 133 ft. above the base. At night flares at the Liquid Petroleum Gas Plant, in position 30° 54.2′ N. 20° 05.4′ E., can be seen from a considerable distance; by day a column of smoke emanating from this position is also conspicuous. Fourteen large oil tanks, painted white, near the foot of the Radio mast, are prominent landmarks.

Positions of Moorings:

"Alpha" berth	30° 53′ 30″ N.	20° 01′ 05″ E.
"Bravo" berth	30° 52′ 18″ N.	20° 01′ 24″ E.
"Charlie" berth	30° 52′ 08″ N.	20° 00′ 11″ E.
"Delta" berth	30° 50′ 56″ N.	20° 00′ 26″ E.
"Echo" berth	30° 50′ 16.4″ N.	19° 59′ 16.1″ E.

FLAGS: When arriving at Zueitina by day, ships must display, in addition to their own national ensigns, the Libyan flag and the appropriate quarantine signal. Throughout the ships' stay, during daylight hours, they must display the Libyan flag, their own national ensigns and, when applicable, the International Code signals "B", "H" or "G", and the appropriate quarantine signal.

DOCUMENTS: Soon after vessel's arrival, a Custom's officer will board, accompanied by a Company employee, who will act on behalf of the ship and its Agent, as well as on behalf of the Company, in the execution of essential business. The following documents, signed by the Master and imprinted with the ship's official stamp, are required by the Customs official for the Customs and Immigration Departments and for the Port and Lights Authority:

2 copies Entering and Leaving Territorial Waters Certificates.
2 copies Report Inwards Certificates.
2 copies Crew Declarations of Dutiable Goods.
2 copies Crew Declaration List.
2 copies Report Outwards Certificates.
3 copies Boycott Certificates.
2 copies Stores Lists.
5 copies Crew Lists.
1 copy Clearance from Last Port of Call.
2 copies Tanker Characteristics Certificates.
1 copy Certificate of Discharge, from the Discharge Port Authorities, of the last cargo loaded in Zueitina.

With the exception of the Crew Lists and the Stores Lists and the clearance from the Last Port, the above forms will be provided by the Company clerk.

It is important that the Master should be able to produce a properly authenticated certificate of discharge covering the last cargo loaded into the ship in Zueitina. If for some reason he is not in possession of such a certificate, he must write a letter of explanation which includes the pertinent extracts from the ship's logbook, append his own signature to it and stamp it with the ship's official seal, and address it to the Ministry of Petroleum, Es Zueitina. If the explanation for failure to produce the certificate is considered satisfactory the ship may be permitted to load. If there appears to be any suspicion that the last port was not as stated, the ship will be turned away.

If the vessel has not previously loaded in Zueitina, the Master is required to confirm this fact in an official letter, stating also the ship's last port of discharge and giving an undertaking that the cargo about to be loaded will not be discharged in any of the countries to which the Arab embargo extends.

The Mooring Master will, after boarding, lose no time in informing Zueitina Marine that he has received one or other of these foregoing documents from the Master, which he will, at the first opportunity, send ashore for delivery to the Ministry of Petroleum representative. This will ensure that there is no unnecessary delay in the commencement of loading.

On completion of loading, the Company's clerk will again board the ship with the cargo documents which are to be signed by the Master. The clerk has to deliver to the Master one copy of each document for his own use and one copy for consignee and bring the rest of documents ashore with him.

1 Bill of loading
2 Cargo manifest
3 Time sheet
4 Certificate of Origin
5 Master's receipt
6 Export manifest

all of which forms are provided by the Company or by the Agency. He will also take ashore any letters to be posted. On occasions, a customs official will visit the ship with the documentation clerk prior to sailing to ensure that the seals which were put on the bonded stores lockers have not been tampered with before the ship has left Libyan waters.

The documentation formalities prior to the ship's departure, are usually completed whilst the ship is unmooring from the berth, or just after it has left the berth, hove to with the Mooring Master still aboard. Sometimes, however (and particularly after the loading of "Agip" cargo), the processing of the papers ashore may take longer than usual, and the ship may have to anchor to await the clerk's eventual arrival, in which case the Mooring Master will direct it to a safe anchorage before disembarking. Zueitina Marine will then inform the Master when the launch bearing the clerk is about to leave the Small Craft Harbour, in order that the anchor may be weighed, and a lee side presented to the launch.

For information relating to ships' movements at Zueitina Terminal, such as arrival times, delays in berthing, quantities of cargo loaded in their vessels, tanker owners and agents, should contact Occidental International Oil, Inc. 16 Palace Street, London SW1E 5BQ. Telephone 01-828 5600.

ACCEPTANCE PROCEDURE: *Notice of Readiness, Laytime etc:*

Vessels Loading Crude Oils: A vessel for which a berth is available on arrival will be boarded by the Mooring Master at the Terminal Light float and, providing that the vessel is in all respects ready to commence loading (except for the necessary de-ballasting time), the Notice of Readiness will be accepted at the time of the Mooring Master boarding, subject to the provisos – a, b, c and d, below.

If the vessel is not in all respects ready to proceed to the berth, with main engine and auxiliaries fully manoeuvrable, mooring ropes on deck, anchors, windlasses, winches, etc., in good working order and readiness, it will not be accepted until the Mooring Master is satisfied that all these conditions are met.

A vessel which has been instructed by Zueitina Marine to anchor in the roadstead on arrival should, after doing so, inform Zueitina Marine of the precise anchorage time, which time will, for the purposes of berthing order and the Port Log, be considered as the vessel's arrival time. According to the practice of the port, acceptance of the Notice of Readiness will coincide with this arrival time, providing:–

(a) that it is within the hours of daylight – deemed to be from 06.00 hrs. l.t. to 18.00 hrs. l.t.,
(b) that it is not a Public Holiday, or a Friday (the Libyan Sabbath), unless the vessel is actually handled on that day,
(c) that the port is open, and
(d) that the vessel has been nominated to load.

An exception to clause (a) above, is when conditions allow of night berthing, in which case the vessel will be accepted when the Mooring Master boards, or, should the vessel have been at anchor, when the anchor is aweigh, providing that the Mooring Master is then on board.

In the case of a vessel arriving without nomination, the Notice of Readiness will be accepted when notification of her nomination has been received at the Terminal, subject to provisos (a), (b) and (c) above, and instructions from the Company's Operations Department. On occasions when the Company deems it advisable to berth a vessel prior to the date of the nominations, acceptance of the Notice of Readiness will be at the time the Mooring Master boards, providing that the anchor is then aweigh.

In addition to clauses (a), (b) and (c) and (d), above, vessels will not necessarily be accepted when arriving at a time ahead of, or behind, their last scheduled Estimated Time of Arrival, especially if such acceptance would be at the expense of a vessel that has arrived within its nominated period.

Vessels Loading Liquid Petroleum Gas: A Liquid Petroleum Gas Tanker's Notice of Readiness will be accepted on arrival, provided that:

(a) the port is open ("port" meaning, in this case, the LPG berth),
(b) that it is not a Friday (the Moslem Sabbath) or an official holiday, unless the ship is actually handled on that day,
(c) that it is not during the night hours – deemed to be, at the LPG berth, between 18.00 hours and 06.00 hours (local time) – unless the ship is actually handled during that period,
(d) that the ship does not arrive on the same day, or clash with the loading of, another LPG tanker chartered under a LINOC contract,
(e) that the ship's tanks are in such a state of readiness, i.e., requiring no cooling, no purging, that loading can be commenced at *full rate* immediately the hoses are connected,
(f) that the arrival time does not differ appreciably, either before or after, from the last signalled ETA sent by the ship and received at the Terminal, and
(g) that the vessel has been nominated to load.

When a Liquid Petroleum Gas tanker does arrive whilst the port is closed, the Notice of Readiness will be accepted at the time of the opening of the port, subject to provisos (b), (c), (d), (e), (f), and (g).

The N.O.R. of an LPG loader arriving on a Friday or on an official holiday, or during the aforesaid night hours, will be accepted at 06.00 hours (local time) on the first subsequent working day, subject to provisos (a), (d), (e), (f) and (g).

An LPG tanker arriving on the same day as an LPG tanker scheduled to load under a LINOC contract, or whose loading would clash with an LPG tanker scheduled to load under a LINOC contract, will have its N.O.R. accepted on the completion of hose connection, subject to provisos (e) and (f).

PILOTAGE: A Mooring Master will board the vessel in the close vicinity of terminal Light float and advise Master on all manoeuvres relative to berthing, connecting and disconnecting the hoses, and in all operations within the anchorage or berthing area.

Vessels of 40,000 d.w.t. and upwards should have a pilot ladder long enough to reach the Mooring Master's launch rigged just abaft the accommodation ladder, in such a manner that the Mooring Master can transfer to the accommodation ladder when about 10 ft. from sea level. Ladders must be strong, clean, and in good state of repair and conform to international requirements. In cases where the ladder(s) fails to conform with these requirements, the Mooring Master will decline to board until an adequate ladder has been provided. A good lee should be made, to allow the launch to come alongside the Mooring Master to board safely. (Note: Ships which have been instructed to berth at the S.P.M's, and need to take the Company's gear aboard, should have the ladder(s) rigged on the port side, in order that they may take it aboard from the Mooring Master's launch with the working derrick as soon as the Mooring Master has boarded.)

The Mooring Master may require the vessel to unberth at any time he deems it necessary for the safety of the vessel, or the installations, or both, or because of infringements of the Port Rules by the vessel.

As soon as practicable after boarding, the Mooring Master will inspect the mooring and lifting equipment and the ballast, and not until he has assured himself that the equipment is adequate, and the ballast clean, will the ship be accepted. His opinion of the adequacy of the gear, and of the cleanliness of the ballast, shall be final.

ANCHORAGE: Vessels awaiting the Mooring Master, whether for berthing in the crude oil berths or alongside the LPG berth, should heave to in the close vicinity of the Terminal Light float. If they are obliged, or instructed to anchor, they should do so in the recommended anchorage, which is within the radius of a circle centred in position Lat. 30° 55′ N., Long. 20° 01′ E. Under no circumstances should they anchor South of the 30° 54′ 00″ parallel. Whilst at anchor, they should exercise the utmost vigilance, and should keep in VHF radio-telephone with the Terminal at all times. If heavy weather necessitates them heaving up anchor and proceeding to sea, Zueitina Marine must be informed accordingly.

RADIO: Cable Address: OXYPORT OXYLIBYA TRIPOLILIBYA (via Tripoli Radio) OXYOIL LONDON (via Portishead Radio). 72 hours prior to arrival at Zueitina, Masters should advise the Company of their vessels' ETA, by cables sent both via Tripoli and via Portishead Radio to the addresses given above. They should subsequently confirm or amend them when they are 48 hours and again when they are 24 hours distant from the Port.

(Cables to Agents advising of ETAs should be sent in addition to, and *not* in place of, those sent to OXYPORT, TRIPOLI and OXYOIL, LONDON.)

Cables should include the quantity and grade of cargo to be loaded, the last port of call and destination, Bill of Health status and details of any sickness on board. Estimated times of arrival should be given in GMT. (Libyan Standard Time is GMT plus 2 hours.).

Masters of vessels equipped with VHF radio-telephones should contact Zueitina Marine on Channel 13 or Channel 16 when within range, and give a firm calculated time of arrival at the Zueitina Light float. They should also again inform Zueitina Marine duty officer of the quantity and grade of cargo required, the last port and the destination. They should confirm that they have in their possession a certificate of discharge for the last cargo loaded into their ships in

Zueitina or, in cases of ships arriving in Zueitina for the first time, that they have ready for the Ministry of Petroleum a letter which certifies that the cargo which they are about to load will not be discharged in any country against which the Arab Oil Embargo extends. In vessels paying their first visit to the Terminal, Masters should also inform the duty officer of the size and type of the manifold connections (i.e. 12 in. A.S.A., or 10 in. European, etc), and whether or not they have on board heavy wires and shackles for mooring at the mono-buoys.

(N.B. It is important that all ships arriving at Zueitina are fitted with VHF radio-telephones, capable of operating on the main working Channels. Without VHF communications, Zueitina Marine cannot always know with accuracy a vessel's arrival time, and as a result that vessel might well lose its loading turn and be subjected to an appreciable – and, with VHF, avoidable – delay in consequence.)

An aerial radio beacon is located on the N.E. arm of the Small Craft Harbour, in position 30° 54′ 05″ N., 20° 04′ 12″ E., intended as an aid to navigation for aircraft flying to and from Zueitina airstrip. The beacon transmits continually the call sign ZUE, on 369 kHz: the signal, which is omni-directional, has a range in excess of 100 miles.

HEALTH: Pratique will be granted by the Custom's official. He will examine the ship's logbook, and will inspect and seal the bonded storerooms.

All ships must display the appropriate quarantine signal until given pratique.

TUGS: No tugs available to assist berthing.

BERTHING: The sea terminal consists of five berths for loading crude oil products, two of which – "Bravo" and "Delta" – are conventional buoy moorings, and the others – "Alpha" "Charlie" and "Echo" – are "single-point moorings", or "mono-buoys". Conventional buoy moorings "Bravo" and "Delta" are approximately 2.5 miles offshore, with an average depth of 70 and 80 ft. respectively. 42 in. (ID) submarine lines connect the berths to the shore installations. To the header at the seaward end of each of these submarine lines are connected two strings of flexible reinforced rubber hoses, laid on the sea bed and buoyed when not in use. The forward of the two strings is made up of (from the header) three 30 ft. lengths of 24 in. i.d. hose, two 30 ft. lengths of 20 in. i.d. hose, and seven 30 ft. lengths of 16 in. i.d. hose. The after string is similar, but with one less length of 16 in. i.d. hose. To the seaward extremity of each hose string is fitted a 16 in. to 12 in. A.S.A. reduction flange. When the ship has berthed, each hose string is towed in to the ship's side below the manifold by the attendant launch, to be hove up by crane or derrick and bolted to the ship's connections, *invariably on the port side.* Where the ship's connections differ from the 12 in. A.S.A. flange on the hose, suitable reduction spools must be fitted. The weight to be lifted on each hose is approximately 7 tons.

Single-point moorings, "Alpha", "Charlie" and "Echo" are all approximately 3 miles offshore, in an average depth of 100 ft. of water. The submarine pipe-lines to "Alpha" and "Charlie" berths are of 48 in. i.d., that to "Echo" berth, 42 in. i.d. Particulars of the strings of hoses from the header to the ship's manifold are described in detail in the chapter on "Single-point Moorings". As in the conventional buoy berths, *the hoses are always taken up on the port side,* and the connecting flange on the hose is 12 in. A.S.A. pattern. The weight to be lifted is approximately 7 tons, but this is to some extent dependent on the ship's freeboard.

Mooring Equipment: As a guide to Masters who intend to save time and labour, especially in these days of reduced "general purpose" crews, by equipping their ship with the requisite mooring gear, the following standard requirements is suggested:

(a) Two (2) flexible steel slip wires, 1.75 in. dia., 5.5 in. circumference, 130 ft. in length, or longer if the distance from the fairlead to the bitts is such that 130 ft. would be insufficient to make fast safely. Such slip-wires will have an eye spliced in one end only.

(b) Two (2) screw-pin or threaded bolt and nut, bow shackles, bow size 2.5 in., pin diameter 2.75 in., minimum width, jaw to jaw, 4 in.: breaking strain 150 tons.

Single-point Moorings. The "Mono-buoy" is a large cylindrical buoy (weight 106 tons), divided by steel bulkheads into four water-tight compartments, through the centre of which emerges the loading hose. The perimeter of the buoy, to which the buoy-to-ship moorings are attached, is a turntable which revolves on bogies round the centre – hose-supporting – section, in such a manner that the vessel berthed on the buoy will always lie head to wind. The minimum depth of water within the swinging radius of the largest ship envisaged at the buoy is approximately 95 ft.

To the mono-buoy is attached a 240 ft. length of chain cable, made up of 2.375 in. U3 steel studded links, and supported in polyeurathene buoyancy collars, at the seaward end of which is a "chafing chain". This "chafing chain" is 20 ft. long and of similar construction to the main chain, but with three open links at the end: it is detachable for periodic renewal. To the end of the chafing chain is attached the "approach rope" – a 200 ft. length of 10 in. circumference plaited polypropylene which, when not in use, is allowed to float out free from the buoy.

The ship approaches the buoy from downwind, taking care to keep the wind right ahead. (Adequate ballast should be retained aboard to provide manoeuvrability.) When sufficiently close, the crew will lower to the attendant launch the end of a good mooring rope, to the eye of which has been attached a stout nylon lashing, about 2 fathoms long. This mooring rope should be passed out through a central panama lead, if a suitable one exists, or over a fairlead on the port bow. (When the ship is fitted with a bulbous bow, a line put out through a central lead, should be brought back down the bow and then lowered to the water, to avoid the possibility of the launch, when coming in to collect the end of the rope, coming into contact with the bulb). Meanwhile, two heavy 5.5-in. circumference flexible steel slip wires have been made fast in readiness – one on each bow, if the line is being hove through a central panama lead, both on the port side (and preferably on different sets of bitts) if the port fairlead is being used – in such a manner that there is an adequate number of turns around the bitts and that the end of the eye reaches to approximately 10 ft. and 10 ft. 09 in. respectively from the fairlead. When the chain comes aboard, it is quickly secured to the wires by two 150 tons B.S. shackles, which are bolted through two of the open links in the chafing chain. The strain on the approach rope (which had followed the ship's rope round the drum-end of the windlass) is now released, and the weight allowed to come on to the wires, shackles chain, and buoy composite: the approach rope is then "turned-up" as an additional mooring and the ship is now all fast in the berth. Ship's tension wires, or other mooring lines, should also be shackled or lashed to the chain, for added security.

When leaving the berth, the ship's additional moorings are first detached from the chain, any slack which is in the approach rope is taken in and that rope made fast very securely. The slip wires are then slacked off slowly and carefully until the strain comes on to the approach rope. (When strong winds have tightened the mooring, it will probably be necessary to put the engine slow ahead before attempting to do this). The shackles can then be taken adrift, freeing the wires, and the approach rope slacked off until the chain reaches the water – care being taken to ensure that it is not allowed to fall across the hoses. The engine is then put astern, and the rope allowed to pay out easily (with half a turn around the bitts to stretch it clear) as the ship leaves the buoy.

(Reminder – unlash the ship's rope from the approach rope before unmooring from the buoy!)

Loading. Rate of loading is between 32,000 and 50,000 b.p.h.

Conventional Buoy Moorings. In berths "Bravo" and "Delta" the ship is berthed with two anchors streamed out ahead and mooring lines to buoys round the stern and quarters. In addition, to all buoys except No. 4 (right astern) there are attached 5.5 in. circumference steel wires, laid on the sea bed, buoyed, when not in use — in all but the most settled weather these are brought into the ship by the mooring launch, hove up and made fast on board. Vessels should have ready a good 3.5 in. rope messenger to take up these wires, and strong chain stoppers, or "carpenter's stoppers", for use when securing them.

Before the ship reaches the berth, there should be three good mooring lines ready on the after end of the main deck, two of which have been securely married in readiness to be sent away first, to warp the ship round. At least seven good ropes should be ready for running out from the poop, with lashings ready in case one rope has to be married to another. Plaited polypropylene ropes, at least 120 fathoms long and of a diameter and strength appropriate to the size of the vessel, are recommended: large manilla ropes, slow and cumbersome to handle, are definitely unsuitable for berthing under these conditions.

Synthetic ropes on automatic winches are favoured in this port, but it is recommended that they be at least 150, and preferably 200, fathoms long. The winches must be capable of being firmly locked when in the moorings — any tension feature is not permissible.

When it has been necessary to slip moorings in order to leave the berth quickly and without the assistance of the mooring launches, the Company will make every effort to recover them and to return them to the vessel as soon as possible. Normally the Company makes no charge for recovering anchors and moorings, but it reserves the right to do so under exceptional circumstances.

In the conventional buoy moorings, in order that ships may be securely moored against beam winds and with sufficient chain leading ahead to ride out heavy swells, it is recommended that they be equipped with ample chain on both bower anchors. Experience gained in sea berths suggests that the chain required on each anchor should be more than the length of the ship. In vessels of 100,000 d.w.t., for which the berths were designed, it is recommended that there should be 14 shackles (1,260 ft.) of chain on each anchor. A minimum acceptable amount of chain is 10 shackles (150 fathoms) for the safety of the ship and the company's installations. Anchor marker buoys should be used.

HOSES: The lifting, lowering, connecting and disconnecting of the cargo hoses will be done by the tanker's personnel in accordance with the advice and directions of the Mooring Master. Ship's derricks and deck winches should be capable of operating with a safe working load of 7.5 tons and preferably 10 tons. Vessels with inadequate hose-lifting equipment will be rejected. All derricks should be fitted with "preventer-guys" in addition to normal guy tackles. The port derrick must be rigged and ready for use on arrival. In addition ships leaving SPM should have the starboard derrick ready, too, in order to facilitate the discharge of the mooring gear on the lee side.

Sets of bitts, or strong staghorns, for hanging off the hoses, must be provided, suitably located near the manifold.

On the surface, extending from the buoy (to which it is connected by a Chiksan swivel (a universal joint), is a hose string comprised of 21 (at "Echo") 25 (at "Alpha" and "Charlie") 30 ft. lengths of 24 in. i.d. floating hose, culminating in a floating junction box: from the other side of this junction box emerge two strings of four lengths of

16 in. i.d. hose. The end ones – the "over-rail" hoses – are fitted with 16 in. to 12 in. A.S.A. reduction flanges, which, after the hose has been hove aboard, are bolted or clamped to the ship's manifold.

For V.L.C.C.s, additional lengths of floating hose are inserted if necessary.

LOADING: *Occidental crude oils and debutanized condensate:* The principal cargo loaded at Es Zueitina Terminal is Occidental Field Blended Crude Oil, pumped in from the Company's wells, two hundred and twelve kilometres inland, but in addition certain other grades of Crude Oil are loaded, namely, Occidental Medium Crude, Occidental Premium Crude, and Occidental Debutanized (Stabilized) Condensate. Also loaded are Liquid Petroleum Gas products, Butane and Propane (LPG) see "LPG Loading Berth", and "Agip" Buattifel Crude Oil, from the wells of Agnezia Generale Italiana Petroli, in concession 100.

The following pertinent data will, we believe, be of interest to tanker owners and operators, Masters and Mates, and to refinery operatives in the discharging ports:-

Occidental Field Blend
Average A.P.I. 40.1
Average Specific Gravity 0.8246
Pourpoint +35
Reid Water Vapour Pressure +5.2 p.s.i. at 100° Fah.
H_2S less than 5 p p m.
Flash Point below 60° Fah.
Average loading temperature on board 108° Fah.
Barrels per long ton at 60° Fah. 7.741

Occidental Medium Blend
Average A.P.I. 36
Average Specific Gravity 0.8448
Pourpoint +85
Reid Water Vapour Pressure +5.0 p.s.i. at 100° Fah.
H_2S less than 5 p p m
Flash Point below 60° Fah.
Average loading temperature on board 98° Fah.
Barrels per long ton at 60° Fah. 7.582

Occidental Premium Crude
Average A.P.I. 43.5
Average Specific Gravity 0.8086
Pourpoint +30
Reid Water Vapour Pressure +5.6 p.s.i. at 100° Fah.
H_2S less than 5 p p m
Flash Point less than 60° Fah.
Average loading temperature on board 108° Fah.
Barrels per long ton at 60° Fah. 7.922

Occidental Debutanized (stabilized) Condensate and Debutanized Condensate:
Average A.P.I. 78.0
Average Specific Gravity 0.6706
Pourpoint −60° Fah.
Reid Water Vapour Pressure 11.0 p.s.i. at 100° Fah.
H_2S less than 1 p p m
Flash Point less than 0° Fah.
Average loading temperature on board 75° Fah.
Barrels per long ton at 60° Fah. 9.555

The grades of cargoes to be loaded will affect the berthing schedule, irrespective of the chronological sequence of vessels' arrival times.

It is recommended that vessels take the maximum flow with due regard to safety, in order to both expedite the turn-round time and to obtain the bottom-weight to counteract the possible effect of local winds which frequently spring up with little warning.

Care must be taken not to overload, as there is no provision whatsoever for cargo once loaded to be pumped back ashore.

Warning is given of the danger of closing hoses against an incoming oil flow. Such a procedure may create excessive pressures which result in damage to loading hoses, sea lines, and other Terminal equipment. Vessels which ignore this warning and do in consequence cause such damage will be held responsible for all costs incurred for the renewal or restoration of the damaged equipment.

The attention of Masters is drawn to Safety Precautions, wherein they are reminded of their responsibilities for ensuring that all persons aboard their ships are cognizant with the hazards involved in the loading operations, and with the need for strict observance at all times of the Fire and Safety Rules. Debutanized Condensate, in particular, is a highly volatile fluid which must be treated with the utmost prudence.

(N.B. particulars of cargoes included in the foregoing are for information only and do not constitute a guarantee of quality.).

Loading – A.G.I.P "Buattifel" Crude: Because of its high wax content – 37% – A.G.I.P. "Buattifel" Crude Oil, (hereafter referred to as "Agip") has to be maintained at a very high temperature throughout its entire transit from the wells to the Terminal system, and thence via the sea lines to the berth and the loading vessel: it will arrive on board at approximately 140° Fah., and the heating coils in the cargo compartments must be motivated in readiness and be capable of keeping the oil at above this temperature.

Two berths "Bravo" and "Charlie", have been modified for the loading of Agip cargoes – ships may be moored in either of these berths but because of the considerable heating problem involved only one of the berths at a time can be used for loading Agip cargo. Through the submarine lines to "Bravo" and "Charlie" central "gut" lines have been inserted – at "Charlie" berth where the sea line is 48 inches diameter, the gut line is of 18 inches diameter, and at "Bravo" – sea line 42 inches diameter – the diameter of the gut line is 16 inches. These two gut lines (which are, of course, tied in ashore with the Terminal tank and metering and pumping complex) terminate 20 ft. from the headers at the seaward ends of the sea lines. The area between the outside of the gut line and the interior wall of the sea line is called the "annulus". To the headers (from which emanate the strings of flexible hoses which are ultimately bolted to the ship's manifold connections) are fitted remote control hydraulic valves, operative from the loading station within the Terminal.

Immediately prior to the berthing of the prospective Agip loading ship, hot Occidental crude oil is circulated from its storage tank, through the gut line, and back through the annulus, heating the entire system. Once the ship is securely moored, preparations are made to replace the hot "Oxy" oil with hot Agip oil. (60,000 barrels is the full line content at "Charlie", 33,600 barrels at "Bravo"). This process will take about four hours, and ship and shore must work in conjunction to ensure that the deballasting and the recirculation of the line with hot Agip oil are completed at about the same time. This is of vital importance, for once the line system is filled with hot Agip cargo it cannot remain in circulation for more than one hour. If the ship is not then ready to receive it, the Agip oil must be replaced by Oxy oil, and only after this has been circulated round the line can the line be again replenished with another circulation of Agip oil. This entire process may take about twelve hours – a wastage of time which neither the Terminal nor the ship operators can afford to contemplate with unconcern.

When ship and shore are ready to begin loading, the remote control valves are opened and, at a very slow rate, the cold Oxy oil which has been in the flexible hoses is loaded – 1,500 barrels at "Charlie", 300 barrels at "Bravo".

At this point, the loading officer in the ship will transfer the cargo to other tanks to avoid intermingling of the two types of crude, for now hot Agip is entering the ship's system, from the gut line. Loading continues at a slow rate until the contents of the gut line – 6,000 barrels at "Charlie", 3,600 at "Bravo" – have been pumped into the ship, after which the loading of the Agip, at normal rate, is through the annulus only. (The gut line is, at this point, filled with Oxy oil, which will remain static throughout the loading of the Agip cargo).

With about 2,000 barrels of Agip cargo to go to completion, loading is stopped in order that the ship's loading officer may check his ullages and calculations. When, in "Bravo" there are 300 barrels to go, in "Charlie" 1,500 barrels, loading is again stopped briefly: this marks the completion ashore of Agip cargo being pumped into the circuit. Now the Oxy oil in the gut line is pumped into the flexible hose strings, so that when the required quantity of Agip oil has been loaded into the vessels, the hose strings – from the headers to the terminal flanges, disconnected from the manifold – are filled with Occidental crude oil, which will not solidify whilst the hoses lie dormant under the sea. Similarly, the Agip crude oil in the annulus of the sea line is pumped back into the tank ashore and replaced throughout the system by Occidental crude.

The foregoing explanation pertains to vessels loading Agip cargo only, taking the minimum essential Occidental oil solely as a line flush. If, however, a ship requires a part cargo of Occidental crude, it will load that after completing the Agip cargo, except for that small quantity used as the line flush at the commencement.

A.G.I.P. "Buattifel" Crude, particulars:-
Average A.P.I. 41.0 at 60° Fah.
Average Specific Gravity 0.806
Wax Content 37%
Pourpoint +95
H_2S Nil
Flash Point 68° Fah. (ABEL)
Average Loading Temperature on board 140° Fah. to 150° Fah.
Barrels per Long Ton 7.9 (approximate)

(N.B. The above data is for information only and does not constitute a guarantee of quality).

LPG LOADING BERTH: *Berth, location and nature:* The LPG loading berth is S.S.W. of the Small Craft Harbour, inside Tre Scogli reef. It is designed for vessels of approximately 700 ft. in length, with a cargo capacity of 32,000 cu.m. The maximum permissible loaded draft (1977) is 28 ft., but dredging operations scheduled for early in 1978 will eventually allow ships to be loaded to a maximum draft of 32 ft.

The channel through the reef, between Trinity Beacon (black tripod structure, group flash 4, green, every 10 seconds) and Wafeya Beacon – Scoglio Sud – (red skeleton tower, group flash, 6 every 10 seconds) runs in a 315° (T) – 135° (T) direction: it is marked by two leading marks, the front one in position 30° 53′ 16″ N., 20° 03′ 42″ E., and the rear one 750 m. (2,460 ft.), 135° (T), from this position. Both marks are black steel pylons with black and red oblong grid topmarks: the front one shows at night an amber light flashing every 1.5 seconds, whilst the rear one shows an amber occulting light, the period of light being six seconds every ten seconds. A small white spar buoy, showing at night a quick flashing red light, marks the turning position for ships approaching or leaving the berth.

The loading platform is of structural steel, supported on concrete piles, and faced with heavy rubber fenders. Ships are berthed alongside four breasting dolphins (two of which are incorporated into the loading platform), with other mooring dolphins ahead and astern and on the inside bow and inside quarter. Ships approaching the berth swing round on the port anchor and about six shackles of chain – when moored, the chain is hove tight and, with a swamp wire on the port quarter, provides an additional safeguard.

Only one loading line is used, with a connecting flange of 12 in. A.S.A. It is hove on board the ship with the ship's derrick or crane, or radial davit. There is no return vapour line.

Such is the location of the berth – fully exposed to winds from most directions but sometimes protected partially by the reef from the worst effects of the swell – that on occasions LPG tankers cannot be berthed although the crude oil berths in the harbour are operational. And vice versa. Consequently, with regard to Port Closure Time, the LPG berth is regarded as a separate entity from the main harbour.

Arrival: On first contacting Zueitina Marine by VHF (Channel 13 or 16), the Master of an LPG tanker should, in addition to giving his ETA at the Terminal Light Float, inform Zueitina Marine of his last port, the intended port of discharge after leaving Zueitina, the quantity and grade of cargo required, the temperature at which he wishes the cargo to be loaded, the size of the ship's manifold connections, and whether or not he has aboard a certificate of discharge for the cargo loaded in Zueitina.

If the vessel is to berth on arrival, the Mooring Master will board in the close vicinity of the Terminal Light Float. If the ship is instructed to anchor, the Master should do so in the recommended anchorage.

Pratique, Customs Formalities: If the ship has been obliged to anchor, pratique and Customs formalities may be dealt with in the anchorage. Alternatively, they may be attended to on board after the ship has berthed.

For information regarding documents required on arrival, Customs and Immigration procedure see "Documents".

Loading: For a ship which needs tank purging and cooling prior to loading, the minimum rate will be approximately 100 barrels per hour. Inert gas is not provided at Zueitina Terminal – the vessel must provide inert gas for purging after previous cargoes other than butane or propane. The ship will not be loaded until the air has been purged to a maximum oxygen content of 0.5%. When loading has commenced, the minimum rate permitted by the Libyan Ministry of Petroleum is 1,500 barrels per hour. The maximum rate available is between 6,000 and 7,000 barrels per hour. For "topping off", the rate can, within these limits, be adjusted to the requirements of the loading officer. Arrangements can be made in advance for the LPG plant to stop loading when the desired quantity has been metered into the ship, or alternatively, the ship's loading officer can instruct the Terminal to stop loading when he sees that the correct amount has been received aboard.

Loading operations on board are the responsibility of the ship's personnel. The Master's attention is particularly drawn to the Terms of Acceptance as detailed in the "Tanker Loading Advice" letter which he has signed, and to the "Zueitina Marine Terminal, Fire and Safety Rules".

The loading platform – abreast of the ship's manifold and within easy hailing distance – is manned at all times during loading operations, and the ship *must* maintain a continuous verbal contact with the loading operative. In addition, VHF contact between ship and loading installations must be maintained on Channel 12. In the event of any emergency – fire, leakage, parting of moorings, etcetera – the operative on the platform can stop the loading by remote control.

Unberthing in bad weather: Should deteriorating weather conditions necessitate the vessel leaving the berth quickly, a Mooring Master will be speedily available at all hours.

Cargo Particulars: The following data will, we believe, be of interest to Masters and Mates and operators of vessels loading LPG products:-

Propane
Average A.P.I. 146
Average Specific Gravity 0.510
Reid Vapour Pressure 175 p.s.i.g.
Free Water Nil
Copper Strip Corrosion 1a
Flash Point less than 0° Fah.
Average Loading Temperature −43° Fah. (−42° Cent.)
Barrels per Metric Ton at 60° Fah. 12.3 (approx).

Butane
Average A.P.I. 114.2
Average Specific Gravity 0.576
Reid Vapour Pressure 48 p.s.i.g
Free Water Nil
Copper Strip Corrosion 1a
Flash Point less than 0° Fah.
Loading Temperature at Ship's Request, within Ranges +18° Fah. (−8° Cent.) to +35° Fah. (+2° Cent.)
Barrels per Metric ton at 60° Fah. 10.8 (approx.)

(N.B. The foregoing data is intended for information only, and does not constitute a guarantee of quality.)

Departure: Immediately after completion of loading, the manifold connections are unbolted and the loading arms retracted. Shortly afterwards the Mooring Master will board and, with the assistance of adequate mooring boats, unberth the ship and pilot it through the reef to a safe anchorage in the outer harbour before disembarking.

When the documents pertaining to the ship's loading have been completed ashore, a clerk will take them out to the ship. (On occasions he will be accompanied by a customs official, boarding the ship to ensure that the seals which were put on bonded storerooms on arrival have not been tampered with before the ship has left Libyan territorial water.) It is customary for Zueitina Marine to inform the ship's Master when the documents clerk leaves the Small Craft Harbour, so that the anchor may be hove up and a lee side presented to the launch.

After the documentation formalities have been completed on board, the Master is required to pass by VHF to Zueitina Marine the official sailing time of his ship.

MEDICAL: Medical facilities are limited to emergency cases only. Under certain circumstances, however, the Terminal medical practitioner will give advice to Masters by VHF in cases where Crew members appear to be suffering from undiagnosed ailments. If it is essential for a sick person to be landed, the ship's Agent must first obtain the approval of the Government authorities.

The sick person when coming ashore must be accompanied by an officer or other responsible person able to speak English, and both the patient and the person accompanying him must be in possession of passports. (Not seamen's discharge books, which are not recognised in Libya).

FRESH WATER: No fresh water available.

FUEL: No bunkers available.

REPAIRS: There are no engineering repair shops.

REPATRIATION: Only in an emergency can any crew member be paid off. Seamen's discharge books are not recognised in Libya. Crew members are advised to have a valid passport in their possession in case of emergency.

CUSTOMS ALLOWANCES: Each member of the crew is allowed 25 cigarettes, or 25 grammes of tobacco, one litre of beer, or half a litre of wine, for every day of the ship's stay in port. Other tobacco and cigarettes, wines, beers and spirits, as well as matches, arms and ammunition, and saccharine, will be retained under seal whilst the ship is in Libyan waters.

CONSULS: There are consulates in Benghazi for most of the maritime nations. Those nations not represented in Benghazi are represented in Tripoli.

BALLAST: Because of the exposed position of the sea berths, it is essential that vessels arrive with sufficient ballast for safe handling, having due regard to existing weather and sea conditions. Experience has shown that a fair estimate of the amount required is one third of the summer deadweight. A tanker found by the Mooring Master to be insufficiently ballasted will be rejected. However, it is imperative for the safety of the ship and of the installation that deballasting should be as speedy as possible, to reduce the period wherein the ship is most vulnerable to any sudden deterioration in the weather. It is, indeed, to the advantage of everyone concerned if the ship is able to commence loading as soon as the hoses are connected, deballasting simultaneous with the loading of the cargo. In cases when it is essential to complete the deballasting before loading can start, and deballasting time in excess of six hours will be deducted from the lay time.

As there are at Zueitina no facilities for discharging it ashore, vessels must arrive at the Terminal with clean ballast: all lines, pumps, and strainers must have been flushed out prior to arrival within one hundred miles of the Libyan coastline.

The Mooring Master will inspect ship's ballast on boarding, and he has the power to reject any vessel that he deems would cause pollution in the Terminal waters. A vessel so rejected must procee
to a position over one hundred miles from the coast, re-ballast, a
return only when the ballast is completely clean. A new notic
readiness must then be tended, and the loading turn w
counted as from this second arrival.

The sea area round the ship shall be adequately lig
frequent inspection by the Mooring Master will be mad
ballast discharge. Any pollution whatever, includir
discharge, will be cause for rejection. Similarly, any
causing pollution during loading will be cause for rej
vessel rejected on these grounds will not be re-acce
satisfactory evidence of repairs has been certified by
surveyor.

On completion of deballasting, all unused cargo
must be blanked off, sea valves closed and lashed, de
securely plugged, and drip pans placed below the
connections. All the requirements listed on the Com
and Fire Precautions Check Form must be seen to be
before loading is commenced.

In the event that the Company has to settle any thi
as a result of damage to property caused by pollution
any way to a vessel, the Company will have
reimbursement by those responsible for the vessel
incurred.

WEATHER: Weather conditions in Zueitina are ge
The temperature during the Winter seldom falls
Fah.), and in the Summer, even at midday, is rarel
C. (95° Fah.). The prevailing winds are North-We
mid-Summer months, the land-and sea-breeze
very apparent: a North-Westerly wind springs up
sometimes to reach near-gale force by lat
gradually dying away during the evening. At
wind begins to blow off the land – again so
breeze or near-gale – before falling away comp
During the Spring and Autumn, and in the
there are frequent prolonged periods of ca
However, in Spring especially, and again i

periods may be interrupted by the onset of the "gibli", an off-shore wind which, like the "khamsin" wind in Egypt, springs up with little warning to reach gale intensity, laden with sand and dust to such an extent that visibility is reduced to a few yards.

In the Winter months, prolonged periods of strong North-Westerly gales, with very heavy seas and high swells, accompanied by frequent rain squalls, are experienced. Even after the strong winds have subsided, long, high swells may continue for several hours to prevent mooring operations. Such North-Westerly gales are usually accompanied by a sharply rising barometer, and follow the passing of a cold front, with winds from the West.

Rainfall is confined to the Winter months only. Fog is rare, though it does occasionally occur in the Spring and Summer around dawn, generally dissipating after two or three hours.

GENERAL: Vessels are advised not to have on board any articles whatsoever of Israeli origin. If anything of such a nature is found it will be confiscated and the ship be liable to a fine and possibly to a delay for further investigation.

Goods – and, in particular, alcohol and tobacco – must not be taken from ship to shore, or from ship to ship.

Being an open roadstead, vessels must keep engines in a state of immediate readiness. No repairs to main engine may be undertaken in berth. Steam or electric power must be available on deck in case adjustments to anchor cables or mooring lines are found necessary. Power must be available on ship's whistles and sirens. Ship's boats must not be lowered into the sea and detached from the falls. Swimming is prohibited. The Mooring Master (and, when applicable, his assistant(s)) assigned to a tanker, will remain on board until after the vessel has loaded, unmoored, has completed documentation formalities and has cleared the Company's installations and is safely heading for the open sea. During the time he is aboard he is to be provided with accommodation suitable for one of Master Mariner status, and with palatable meals.

SHORE LEAVE: No shore leave is permitted.

AUTHORITY: Occidental of Libya Inc.

AGENCY: All ships must have an approved Agent to look after their interests. As from 1st June, 1978, all shipping agencies in the Socialist People's Libyan Arab Jamaharaya have been superceded by one nationalised company, known as The Universal Shipping Agency.

At Tripoli, the address is, Post Office Box 3703, Tripoli. Tel: Tripoli 40566 and 39631; Telex: 20263; Cables: UNISHIP TRIPOLI.

At Benghazi, the address is 98 Omar Mukhtar Street, Benghazi. Tel: Benghazi 91705 and 95008; Telex: 40101; Cables: UNIVERSAL BENGHAZI.

Ships bound for Zueitina may contact the Agent there by communications sent to either of these addresses. However, cables of estimated time of arrival sent to the Agent should be in addition to, and not in place of, those sent to OXYPORT, OXYLIBYA, TRIPOLILIBYA. Total charges are 750 Libyan dinars for the first 30,000 tons summer deadweight, or part thereof, plus 2 dinars 500 Dirhams for every 100 tons or part thereof in excess of 30,000 tons, plus 2% of the total sum in revenue stamps.

NOTES

Please also advise Shipping Guides Ltd.

Madeira

FUNCHAL: 32.38 N. 16.55 W. (See Plan Book)

DOCUMENTS:

- Maritime Declaration of Health Form.
- 5 Crew Lists.
- 12 Lists of Passengers finally landing.
- 5 Lists of Passengers in transit.
- 1 List of Stores and Provisions, including Deck and Engine Stores.
- 1 List of Contents of shops on board.
- 6 Copies of Manifest of Cargo for discharge.
- 2 Copies of each B/Lading of Cargo for discharge.
- 1 Copy of Manifest of Cargo in Transit.
- 1 List of Passengers finally landing, visaed by Portuguese Consul at original port.

All other entry and clearance documents are arranged by the Agents.

PILOTAGE: Vessels should radio their ETA to Agents who order Pilot. 24 hours notice requested. Pilot launch flies "H" flag during day. Exhibits bright white light over red at night. To request Pilot on approach by day fly international "G" flag, or give 2 long and 1 short blast on whistle. At night flash 2 long 1 short. For vessels berthing alongside Pilot boards in bay; for vessels anchoring Pilot does not board but pilot launch indicates where vessel should anchor. Pilot boat equipped with radio telephone on 2182 and 2341 kHz.

Also VHF, Channel 16 (calling) and Channel 6 (working).

ANCHORAGE: Permitted anchorage within 800/900 m. East from end of breakwater or 300/500 m. South of breakwater within a limit of 400 m. from shore.

RESTRICTIONS: None.

MAX. SIZE: No limit to size of vessels which can anchor, but all anchorage positions should be indicated by pilot launch. For vessels berthing alongside quay max. permissible length 990 ft. max. draft 36 ft. Oil carriers discharge at buoys at Praia Formosa 3 miles to West of Funchal. Max. length of oil tankers than can berth at oil discharge buoys 665 ft. max. draft 36 ft.

HEALTH: Free Pratique may be arranged by Master sending wireless message addressed "Port Doctor Funchal" – "Request free pratique arriving . . . from . . . sailing to . . . number passengers . . . landing . . . number passengers in transit . . . number of crew . . . all well. Master."

In event suspected disease or fever on board Master should wireless either Port Doctor direct or to ship's Agents, who will inform Port Doctor. The Master will then be instructed what further action he is to take.

When vessel other than of national flag arrives after calling at another port in same country usual procedure applies, i.e. Masters' radio for free pratique or pratique granted by Doctor visiting in bay.

RADIO: Maderia Radio Station call sign CUB 500 k/cs. Same station normally used by Agent when communicating with vessel.

TUGS: Two tugs each of 1,000 /1,100 h.p. – bollard pull 18 tons – are available.

N.B. Vessels up to 2,000 gross tons are not obliged to use tugs.
Vessels of between 2,000 and 15,000 gross tons are obliged to use one tug.
Vessels over 15,000 gross tons are obliged to use two tugs.

BERTHING:

Quay No. 1 Length 139 m., depth 6 m.
Length 41 m., depth 7 m.
Length 19 m., depth 8.5 m.
Quay No. 2 Length 425 m., depth 11 m.
Quay No. 3 Length 347 m., depth 11 m.

STEVEDORES: When ships require labour, Agents must be notified before 1600 hrs. on working days and on Sundays and holidays before 1100 hrs., after these hours labour not available for last minute engagement. On Christmas Eve work stops at noon even if ships loading or discharging. No labour available Christmas Day, New Year's Day or Easter Sunday.

Grain cargoes can only be worked from 0800 hrs. to 2000 hrs. daily including Sundays, and a maximum of 4 gangs only can be worked simultaneously.

Bulk cargoes such as potash and fertilizers need to be bagged on board. Receivers supplying the bags – and this generally applies to grain. Bulk cement, clinker and granulated plaster is discharged by grabs.

MEDICAL: Advance notice is required by Agents for any medical attention required. Hospital facilities available. No inoculations required.

TANKERS: Diameter of connection of discharge lines 8 in. into pipe-lines of 12 in. diameter for black fuel and 10 in. diameter for white fuel. 1 anchorage buoy berth with max. draft of 36 ft.

DENSITY: Salt water.

FRESH WATER: Available at anchorage and ex quay.

Three barges available, with total capacity of 450 tons. Delivery hoses ex barge or ex quay are of 2.5 in. diameter, and there are nozzles of various sizes. Rate of delivery ex barge – 50 t.p.h. per barge. Delivery ex quay, said to be about 60 tons per lead per hour, but this can be slow, according to the number of ships being supplied, and the amount of water in the city storage tanks and may require to be supplemented ex barge in case of big quantities or supplies required within limited time.

FUEL: Fuel oil available from 3,500 seconds Redwood 1 to 200 seconds Redwood 1. Also marine diesel and gas oil. 12 hours (min. notice) required.

FIRE PRECAUTIONS: At discharging buoys usual non-smoking precautions.

GANGWAY/DECK WATCHMEN: Gangway watchmen recommended.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CUSTOMS ALLOWANCES: Tobacco, Wine and Spirits: Moderate supplies allowed for personal use during ship's stay.

CARGO GEAR: No specific local safety regulations. Vessels discharging must provide strops, slings and nets. Lifts over five tons must be effected by ships gear.

10 mobile cranes are available.
1 crane – 6 tons at 12 m., 3 tons at 24 m.
3 cranes – 5 tons at 20 m.
3 cranes – 3 tons at 12 m.
1 crane – 15 tons at 13 m.
1 crane – 45 tons at 3 m.
1 crane – 20 tons at 3 m.

A floating crane is available which can lift up to 27 tons from the water line up to 8 m. This same crane can lift up to 20 tons from the water line to 12 m.

IDENTIFICATION CARDS: Required.

CONSULS:

Austria	21057	W. Germany	20338	Peru	21375
Belgium	20255	Greece	20824	Spain	20535
Brazil	20355	Guatemala	20824	Sweden	20121
Costa Rica	24888	Holland	20317	Switzerland	22101
Denmark	22031	Italy	23890	United Kingdom	21221
Dominica	21057	Monaco	20041	United States	23309
Finland	20596	Norway	20541	Uruguay	20535
France	21445	Panama	20091	Venezuela	24050

REPAIRS: Repair yard available which can carry out most engine repairs on board except removing or replacing main engines. Hull work limited to removing riveting or replacing hull plates above water line, electric and oxy-acetylene welding. Most electrical work can be effected but notice required in regard to materials necessary. Foundry where castings can be made up to one ton weight.

DRY DOCKS: None.

REPATRIATION: Limited facilities for crew changes. Necessary repatriations can be made.

AIRPORT: At Santa Cruz, 20 km. East of Funchal. Service between Funchal and Lisbon operated by national airline TAP, 19 flights weekly Funchal/Lisbon/Funchal.

TIME: GMT maintained throughout year.

HOLIDAYS: New Year's Day (totally unworkable); Easter Sunday (totally unworkable); Municipal Holiday (local) (workable, 50% overtime); Camoes Day (workable, 50% overtime); Corpus Christi (workable, 50% overtime); The Assumption (workable, 50% overtime); Proclamation of the Republic (workable, 50% overtime); All Saints (workable, 50% overtime); Independence of Portugal (workable, 50% overtime); The Immaculate Conception (workable, 50% overtime); Christmas (totally unworkable).

Workers' Day, Portugal Day and Good Friday are also totally unworkable.

Saturday is an ordinary working day. December 24 (workable up to 1500 hrs. only).

POLICE/AMBULANCE/FIRE: Police 22022; Ambulance 22122; Fire 21163.

SHORE LEAVE: All crew visiting shore must be in possession of special Landing Card, plus Identity Cards, Discharge Books or Passports, which must be shown to Immigration Officer at gangway. Crew Landing Cards must be stamped by Immigration Officer before crew can proceed ashore.

DEVELOPMENTS: The Port Authority commenced construction of new jetties in 1976 with completion of the first phase in September 1978.

Phase 1: Construction of 290 m. of berthing space, depth 6–8 m.
Phase 2: Two roll-on/roll-off berths, length 270 m. and 170 m.
Phase 3: Construction of a Marina.

AUTHORITY: Capitania do Porto.

Malagasy Republic

DIEGO SUAREZ: 12.12 S. 49.19 E.

Shipmaster's Report (Survey vessel): 1975.

DOCUMENTS:

Documentation on Arrival:

Malagasy Customs require:
2 Crew Lists.
1 Copy Personnel Manifest (any form will do).
1 Nil Cargo Return.
1 Bonded Stores List.

Immigration/Police:
2 Crew Lists.
Inspect all Discharge Books and Passports.
An undertaking that all men will carry their Identification when ashore.

Port Health:
2 Crew Lists.
3 Vaccination and Inoculation lists very carefully inspected.
2 Copies of their own Maritime Health Declaration Form, copy of which becomes Inward Clearance, after stamping ashore.

Agents:
2 Crew Lists.
Ship's register to lodge ashore.

Documentation on Departure:

A gentleman from the Port Junta visits in plain clothes with the Agent and will wish to see:
Cargo Ship Safety Construction Certificate.
Safety Equipment Certificate.
Safety Equipment Record of Inspection Certificate.
Safety Radio Certificate.
Load Line Certificate.
Ships Register (held by the Agent).

After checking all these an Outward Clearance Certificate will be presented. One is then free to leave the Port, the Agent having given an undertaking that all Port dues have been paid.

APPROACHES/PILOTAGE: Tides run fast in the Orangea Pass, but seem to follow the pattern as per the Admiralty Pilot. Until experience is gained it should only be taken in the hours of daylight. There are numerous natural transit marks available to the navigator, all very clearly described in the 'Pilot'. For this reason it would be essential to take this in fine visibility. Pilots can be taken at Cape Mine but this can be difficult and dangerous in the S.E. Trade season and ships are advised that they can proceed on into the Bay right up to Port Antsirana Point.

ANCHORAGE: There are many splendid anchorages available in this vast Bay. Vessel anchored 2 cables off the N.W. corner of the wharf at Antsirana, to conduct formalities for Customs, etc.

RADIO: Tananarive Radio handles HF traffic and Diego Suarez can handle MF and VHF. English is not understood. Port Antsirana Pilots are available spasmodically on Channel 16.

BERTHING: Good modern berthing, plenty of tugs. 1 pier only about 1,500 ft. long operated by SCOM. Not actually used by vessel which went straight into the Dry Dock.

FRESH WATER: Good quality water available at the Pier and at the Dry Dock. No water barge.

FUEL: It appears that they like to have at least a week's notice. Gas oil is available through the Agent or through Shell. There is a bunker barge but this can be unreliable unless several week's warning is given. Bunker available by bowser and pipe-line at the main wharf.

We were unable to find any lubricating oil at all. Several weeks warning is necessary. All fuels and oils should be ordered through London.

MEDICAL: Great attention was paid by the Port Health Authorities and services asked for were promptly dealt with especially out of date inoculations. There is a hospital with Doctors and the necessary surgeries.

DRYDOCK:

Length overall	199.05 m.	653.00 ft.
Subdivided into sections	128.96 m. 70.09 m.	424.00 ft. 229.00 ft.
Breadth at Bottom	28.40 m.	93.00 ft.
Breadth at Coping	36.60 m.	120.00 ft.
Depth at sill and blocks at MHWS	10.42 m.	34.40 ft.

Yard Services: Nothing was too much trouble for any of their staff attending this ship. Power was a bit of a problem but they did everything to help. Fire mains, fresh water, cranes were all good. Toilets and shower-rooms were more than adequate especially after we were given our keys and had them cleaned.

Workshops: A modern well equipped yard with every conceivable service from an iron foundry to upholstery shops. A clean, well kept set of shops including the building of small craft. The Engineers of this ship were very favourably impressed with the shops and technical services.

SURVEYORS: We were informed that there is no Lloyd's Surveyor in the country but often when required Lloyd's Representative flies up from Durban. Sometimes it is agreed that the resident Bureau Veritas Surveyor will substitute. M. Cavanas lives in Tananarive.

AIRPORT: Air services are available each day to connect with the international Air France flights to Orly from the local airfield about 8 miles from the town.

GENERAL:

Launches: Numerous launches are abounding throughout the harbour. Owned by the Dock Company, the Port Junta and one by the Agent, who charges FMg 2,500 for a round trip out to the anchorage (c £5.00).

Laundry: A laundry man did call but we were unable to offer him any business. He said he would need at least two and a half days to complete a complete ship's wash.

Shore Amenities: Generally a very popular Port for Officers, Scientists and Crew. The absence of large hotels would be felt if the whole ship's company had to be present for a long period.

Hotel de la Poste and the Hotel Nouvelle have each about 15 bedrooms air conditioned, and ordinary. Bed and Continental Breakfast with air conditioning FMg 1,500.00 – FMg 2,500.00 – not more than £5.30 per night. They have excellent dining rooms and good French cooking.

Bathing facilities by taxi at beaches and clubs some 7 or 8 miles from town.

AGENTS: S.C.A.C. Madagascar, Box Poste 384, Malagasy Republic, Diego Suarez, Madagascar. Telephones: Diego Suarez 147. Telex: 93102.

FORT DAUPHIN: 25.02 S. 47.02 E.

DOCUMENTS:

Manifest of Cargo for discharge.
Manifest of Cargo in transit.
Ship's Stores List.
List of Passengers Landing.
Crew List.
Franchise Certificate (for mail-carrying vessels).

PILOTAGE: The port is an open roadstead and pilotage not required.

ANCHORAGE: In depths of 8 m. Vessels anchoring are charged with port dues.

RESTRICTIONS: Port is normally used by coastal trading vessels. In case of liners handling cargo exceeding 150 tons, special permission required which is obtained by Agent.

HEALTH: Pratique should be requested from the Health Department, tel. 36.

RADIO: Fort Dauphin Radio, call sign 5RD, between 0400 and 1630 hrs. GMT on following frequencies: 458, 500, 2182 and 2712 kHz.

TUGS: None available.

BERTHING: There are no berths alongside. Vessels work cargo at anchorage.

STEVEDORES: Arranged by the Fort Dauphin Lighterage Company. Advance notice of ETA required to arrange gangs. Average loading/discharging rate is 10 tons per hold per hour.

MEDICAL: 2 hospitals available in the town.

TANKERS: 1 buoy berth for tankers.

FRESH WATER: No water barge. Only small quantities can be supplied in emergency.

FUEL: Not available.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Opening and closing hatches carried out by stevedores.

CUSTOMS ALLOWANCES: 1 carton of cigarettes per man. No alcohol.

CONSULS: No local representatives.

REPAIRS: Only facilities available for repairing lighters.

REPATRIATION: No facilities for effecting crew changes.

AIRPORT: Situated 5 kms. from the port, 4 regular flights per week.

TIME: GMT plus 3 hours all year round.

HOLIDAYS: Days on which work is normally carried out with overtime payment: Easter; Ascension Day; Whitsun; Assumption; Christmas.

Official holidays on which work can be arranged by special permission: 1st January; 1st May; 26th June (Independence Day); 14th October; Festival of the Republic.

FIRE/POLICE/AMBULANCE: Police Tel. 49; Fire 19; Ambulance 36.

SHORE LEAVE: Not permitted.

AUTHORITY: Service des Ports' Phares et Balises, Tananarive.

AGENT: SCAC Madascar BP 425, Tananarive. Tel. 228–64. Cables: "Freight Tananarive". Telex 22864.

MAJUNGA: 15.44 S. 46.20 E.

DOCUMENTS:

List of Crew Members.
List of Passengers.
Customs Documents.
Health Documents.
Manifests.
Bills of Lading.
Ship's papers.

PILOTAGE: Vessels requiring Pilot must apply by cable to Majunga Harbour Master's office at least 24 hours before arrival. Pilot embarks at Narcissus buoy.

ANCHORAGES: Indicated to ship's captain by cable from Majunga Harbour Master's office.

RESTRICTIONS: Ship's can enter day and night. Max. draft allowed 10 m.
MAX. SIZE: No restriction except for max. 10 m. draft.
HEALTH: Pratique automatic when vessel comes from a Madagascar port. Pilot is health agent.
RADIO: Radio Majunga.
STEVEDORES: Vessel informs Agent by telegraph 24 hours in advance of number of gangs needed.
MEDICAL: Hospital available.
TANKERS: 1 berth, max. draft 10 m.
FRESH WATER: Unlimited drinking water.
CERTIFICATES: See "Tamatave".
CUSTOMS ALLOWANCES: See "Tamatave".
CONSULS: French and Greek consulates.
REPAIRS: Minor repairs only.
REPATRIATION: All facilities available.
AIRPORT: Served by regular airlines; 7 km. from town.
TIME: GMT plus 3 hours.
HOLIDAYS: Catholic and official holidays. Commercial transactions possible on public holidays.
POLICE/FIRE/AMBULANCE: Police 24–85; Fireman 13; Hospital 29–15.
AUTHORITY: Harbour Master.

AGENT: S.C.A.C. Madagascar, B.P. 256, Majunga. Tel. 23.87. Telex: 62710. Cables: Freight Majunga.

TAMATAVE: 18.08 S. 49.22 E. (See Plan Book)

DOCUMENTS:

Health
International Maritime Certificate of Health.
List of Passengers disembarking.
Crew List.

Police
List of Passengers disembarking.
Crew List.

Customs
Ship's Register.
3 sets Cargo Manifests.
Crew List.
2 Stores Lists.
2 Lists of Crew disembarking.
2 Lists of Crew transitting.
2 Lists of Passengers disembarking.

Port
2 sets Cargo Manifests.

Agents
1 set Cargo Manifests.
List of Passengers disembarking.
Crew List.

PILOTAGE: Compulsory. No telegraphic address. Ships advise Agents hour of ETA. Pilots informed by Agents. Due to the breakwater being extended the South Pass is temporarily closed to all traffic. When completed, the extension will render the Pass so narrow that only small coastal vessels can use it.

The East Pass is now permanently in use for large vessels. The pilot boat waits on the East Pass range approximately 3.3 miles S.S.E. of Prunes Island Lighthouse. The pilot boat is fitted with a small, portable VHF set (Channels 16 and 27) but its effective range is only about 5 miles.

ANCHORAGES: No special anchorage. If no berth available on ship's arrival, Pilots put ships at best anchorage, according to draft and length of ship, between Reef and shore.
RESTRICTIONS: No restrictions. Ships enter and sail day and night any time. Max. tide only 3 ft.
MAX. SIZE: For roads, max. length about 200 m. (concerns only passenger ships). For cargo vessels max. length 180 m.; max. draft 31 ft. 2 in. (9.5 m.).

For tankers, max. LOA 230 m., max. beam 31 m., max. draft 12.20 m. in salt water. Distance from stern to manifold 110 m.

HEALTH: Quarantine message sent to Agents who inform Health Service. "Q" flag must be hoisted if health satisfactory. Captain presents maritime declaration of health. Health Officer and Immigration board at Quarantine anchorage.
RADIO: Tamatave Radio, call sign 5RS. VHF frequency (16) 156.80 – (26) 161.90 – 168.95.
TUGS: 1 tug of 1,750 h.p. and 2 tugs of 250 h.p. available to assist berthing.
BERTHING: 3 berths for deep-sea ships and 2 berths for coastal ships. Ships moored at berth in order of arrival and according length and draft. Mooring has to be very strong, due to swell that may sometimes enter harbour when S.E. trade winds are strong, or if cyclone in vicinity. Mooring by 2 chains and special nylon lines furnished by harbour. Swell is so dangerous that ships have to go to anchorage or put to sea until weather improves.
CRANES: 3 ton and 6 ton cranes available for hire. Floating crane 80 ton capacity also available.
STEVEDORES: ETA to Agents must give hatches, tonnages, and all information about cargo.

Working hours: 1st shift 0700 – 1400 hrs., 2nd shift 1400 – 2100 hrs. On Sundays there is one shift 0700 – 1400 hrs. at overtime rates.

MEDICAL: Preferable to inform Agents in advance. All hospital facilities available – smallpox vaccinations.
TANKERS: 1 refinery imports crude oil and exports fuel and refined oils. Tankers moored using anchors forward, and moorings aft.

Diameter of lines 12 inches. No slop discharge facilities. If tanks are to be washed, slops must be discharged outside harbour.

Shipmaster's Report: A brief description of the berthing manoeuvre is as follows:

About 350 m. from the berth, let go starboard anchor and swing around to starboard with the assistance of a tug, slacking the cable all the time. As vessel completes swing, let go Port anchor, then slack down both anchors. Vessel usually finishes up with about 9 shackles on each anchor. Aft, vessel secures with 4 lines from the starboard quarter to the buoy and 4 lines from the port quarter to the quay. The mooring operation takes about 2.5 hours and unmooring about 1.5 hour.

Facilities:

1. One 12 in. rubber hose, connected always from the starboard side. You can expect 4-5 hours for connecting up the hose and about 2-3 hours for disconnecting.
2. The shore tanks are situated about 5 km. from the vessel, and have a total storage capacity of about 100,000 cu.m. The tanks are located about 4 m. above sea level, the heights of the tanks being approximately 13 m.
3. The main pipe-line is 20 in. diameter by 5 km. long.
4. Maximum back pressure permitted is 6-7 kg. However in view of the length and size of the line it is very difficult to obtain such a pressure, even with all 3 pumps going all out. Understand from the refinery Superintendent that maximum back pressure so far attained was 4 kg. The back pressures are monitered by gauges fixed on the manifold and on the quay.
5. The maximum draft permitted at the Tanker mooring is 40 ft. Fully laden tankers arriving can berth only in daylight hours. However 24 hour sailing is possible.
6. The cargo discharging operations are as follows: The main pipe-line is kept constantly filled with bunker fuel and has a capacity of approximately 1,000 cu.m. After connecting up vessels commence discharge of their crude. The bunker fuel in the line is thus pushed back and stored in a separate tank ashore. The vessel then continues to discharge her full cargo. After completing discharge, all tanks are inspected and a dry certificate obtained. The refinery then pushes back the pipe-line crude (1,000 cu.m.) and about 1,200 cu.m. of bunker fuel, which must be stored on the ship in separate tanks. Thereafter, the vessel must discharge all crude, and finally the bunker fuel. Thus the pipe-line is constantly kept filled with bunker fuel. The drawbacks to the vessel are obvious. 3 individual stripping operations are involved viz. stripping the crude during completion of discharge, stripping of pipe-line crude stored in the ship and stripping of the bunker fuel.
   Note: Capacity of shore pumps (when transferring oil back to ship) is 800 t.p.h.
7. Communications: A telephone is installed aboard for communication between ship and shore. This however never seems to be at its best when you need it most. Other difficulties are the language barrier (French being spoken). Notwithstanding, the slow rate of discharge obtainable, helps to offset in part the lack of communications.
8. Out-turn quantities: It is understood that these are checked by sounding shore tanks.
9. Bunkers are available on 24 hours notice. Range Redwood 1,000–1,500 seconds.
10. Diesel oil is available, however as the supply barge has been out of commission for sometime now, supply cannot be depended upon.
11. Fresh Water available.
12. Connection and disconnection of the cargo pipe-line is undertaken by the refinery personnel.

DENSITY: 1023.5.
FRESH WATER: Delivered by water-boats at rate of about 100 t.p.h.
FUEL: Available alongside. Gas oil and diesel oil at 70 t.p.h. Fuel oil at 110 t.p.h.

Vessels at anchorage may be serviced by fuel barge of 250 tons.

FIRE PRECAUTIONS: 1 fire-boat stationed near tankers.
GANGWAY/DECK WATCHMEN: Recommended. Very low cost.
OPENING/CLOSING HATCHES: Booms always operated by crew. If hatches are Macgregor type, by crew; otherwise by stevedores.
CERTIFICATES: Safety certificates (3), Derating or Exemption Certificate, Register, Load Line Certificate.
CUSTOMS ALLOWANCES: 200 cigarettes. Wine/Spirits. 1 opened bottle.
IDENTIFICATION CARDS: Only seaman's papers required.
CONSULS:

France	2721	Dutch	2632
Great Britain	2680	Swedish	2136
Norway	2549	Danish	2615

REPAIRS: Only small repairs possible.
REPATRIATION: Possible, arranged by Agents.
AIRPORT: Served by regular airlines. 1 flight a day by Air Madagascar to Tananarive and 4 to 6 flights a week from Tananarive to Africa and Europe.
TIME: Local time GMT plus 3 hours.
HOLIDAYS: 13 holidays per year. Cargo work cannot be arranged on holidays but can be on about every second Sunday.
TELEPHONES: 2 connections at 2 berths used for passenger ships, but may be requested by other ships.

GENERAL: 14 cranes of 3 tons each. 1 floating crane for max. 120 tons weight. Small tugs and lighters for ships operating on roads. 1 port launch and some private launches for crews of ships at anchor.
SHORE LEAVE: Permitted.
DELAYS: Not fixed. When all berths occupied, ships wait at anchorage.
AUTHORITY: Port Autonome de Tamatave.
AGENT: SCAC Madagascar, Rue du Capitaine-Shoel, BP 411, Telex: 55610. Tel. 320–48; 320–49; 326–80; 326–81. Cables: "Freight Tamatave"

NOTES

Please also advise Shipping Guides Ltd.

Malaysia

DUNGUN, Malaya: 04.47 N. 103.27 E.

DOCUMENTS:

Register.
Last Port Clearance.
10 copies Crew List.
6 copies Passenger List (if any).
6 copies Stowaway List (if any).
2 copies Stores List (including Firearms and ammunition).
2 copies Dutiable Liquor and Tobacco List.
2 copies Crew Declaration List (cameras, radios, etc.).
2 copies Cargo Manifests.

PILOTAGE: Extra charge for pilotage outside normal office hours and holidays. Ocean vessels should anchor about 0.8 miles S.E. of Tg. Dungun Lighthouse.

ANCHORAGE: On arrival vessels required anchor about one mile outside berthed ships to obtain pratique. Accommodation ladder must be rigged on lee side to allow Port Authorities to board.

CUSTOMS: Customs Office hours 0830 to 1630 hrs. (Thursday afternoons, Fridays and holidays excepted).

IDENTIFICATION CARDS: Every member of crew must produce Identity Document or Shore Leave Pass at Customs House when landing and again when returning to vessel.

SHORE LEAVE: No seaman may proceed more than 3 miles from Dungun Customs House. The Immigration Officer has authority to limit or prohibit Shore Leave in all cases.

KOTA KINABALU (Jesselton), Sabah: 06.00 N. 116.05 E. (See Plan Book)

DOCUMENTS:

Documents to be produced on arrival:
Port Clearance from Last port.
6 copies Inward Cargo Manifests.
2 copies Hatch List, *or*
1 copy Stowage Plan.
9 copies Crew Lists.
9 copies Passenger Lists.
2 copies Bonded Store Lists (incl. Arms and Ammunition Lists).

In addition, the Master has to complete a Shipping Arrival Report Form and a Maritime Declaration of Health Form.

Notes: (a) If vessel arrives from any port outside those declared infected.

(b) These 2 copies (Inward Cargo Manifests) must be certified by the Master as follows: "I hereby certify that to the best of my knowledge and belief this manifest is complete and correct. . . . . Master".

To be Supplied to Ship before Departure:
1 set Agents Outward Manifests.
2 copies Passenger Lists for Immigration.*
1 copy Passenger Lists for Customs.*
1 set Manifests for Customs.*
*To be supplied by Agent.

If vessel departs to a port outside Sabah, 2 copies outward crew list are also required for Immigration.

PILOTAGE: Pilot normally available between 0600 and 1800 hrs. only. Written application must be submitted 12 hours in advance.

ANCHORAGES (also see "Health"):

Special Anchorages and Prohibited Areas

(1) *Prohibited anchorage:* No vessels shall anchor as to swing within 3,000 ft. of the F.R.G. light on the N.N.E. end of the Authority wharf in approx. position Lat. 05° 59′ 51″ N. Long. 116° 04′ 30″ E. Vessels under 150 ft. in length may anchor within this area, East of a line joining the F.R.G. light and Gueritz shoal light beacon.

(2) *Prohibited Area:* Except with the previous permission in writing of the Authority, no logs or timber shall be allowed to lie afloat within the area – Eastward of a line drawn in a 172° direction from Grieve Reef Beacon.

(3) *Explosives and Dangerous Goods Anchorage:* Vessels having explosives and Dangerous Goods on board shall anchor within a line drawn from a position in Lat. 06° 01′ 21″ N. Long. 116° 05′ 45″ E. thence in a 360° direction for 6.5 cables thence in a 270° direction for 10 cables thence in a 180° direction for 6.5 cables thence in a 090° direction for 10 cables to the starting point.

(4) *Dangerous Petroleum anchorage:* A vessel having dangerous petroleum on board shall anchor within a line drawn from a position in Lat. 06° 00′ 42″ N., Long. 116° 05′ 45″ E. thence in a 270° direction for 10 cables thence in a 360° direction for 6.5 cables thence in a 090° direction for 10 cables thence in a 180° direction for 6.5 cables to the starting point.

(5) *Quarantine Anchorage:* A vessel which is required to proceed to a quarantine anchorage shall anchor within an area bounded by a radius of 3 cables from a position in Lat. 06° 01′ 34″ N. Long. 116° 03′ 46″ E.

RESTRICTIONS:

1. Entering. Vessels with dangerous cargo such as benzene are not allowed to stay alongside wharf or to berth after 1800 hrs. Vessels arriving from any port within hours of day-light not allowed to berth until they see the signals at the Customs House directing them. This applies equally to vessels arriving on schedule as well as unscheduled vessels and any infringement of these regulations can have very serious consequences. Master of ship not sailing within 48 hours after port clearance to report to Harbour Master reason for not sailing, and, if so required obtain a fresh port clearance.

2. Shifting. The Authorities must be informed prior to shifting.

3. Immigration. No person may leave ship before clearance has been given by Customs/Immigration officers.

4. Currency. There is no restriction on amount of currency which can be brought into this State but max. amount allowed to be taken out is Mal $100. Foreign exchange must be conducted through recognised banks.

HEALTH: (Also see "Regulations"). *(a)* Sabah Government are signatories to WHO convention on Quarantine regulations. Port Health Doctor will not board unless vessel comes from infected port. Instead, Maritime Declaration of Health to be filled-out and handed to Boarding Officer of Health Department who will require 1 copy of crew list and 1 copy of passenger list. Vessels should cable Agent prior arrival advising last port of call and whether vessel is healthy. Pratique normally cabled to ship but if unreceived, vessel need not proceed to Quarantine anchorage unless coming from infected port.

(b) Vessels arriving from ports outside the State will anchor until boarded by Authorities unless previously instructed by telegram to come alongside.

RADIO: (Also see "Health"). Information required before ship's arrival: Manifest, stowage plan, number of gangs required, amount of water required, Pilot requirements. Local radio call sign "Control K.K.".

TUGS: Tug 280 h.p. available to assist vessels berthing and unberthing without a Pilot at inner berth. Ship's lines used.

BERTHING: Wharf T-shaped; outer berth 647 ft. long with min. depth of 25 ft. Inner berth 475 ft. long with min. depth of 21 ft.; 2 godowns 28,000 and 30,000 sq. ft. floor area respectively. Sabah Ports Authority operates one 10-ton crane, 22 towing tractors, 43 6,000-lb. forklifts, one 7-ton forklift, 76 trailers of capacity ranging from 3 to 6 tons. Heavy Lifts up to 6 tons received into Sabah Ports Authority trailers, up to 17 tons could be received into railway wagons, beyond 17 tons overside discharge into landing craft. Sabah Ports Authority landing ramp capable of accepting loads of up to 30 tons. Bulk handling limited to petroleum and bitumen into private installation by pipe-line.

New Wharf: Rectangular island wharf 700 ft.×400 ft.

The particulars of the berths are as follows:

Berth No.	*Length (ft.)*	*Depth (ft.)*
1	700	30
2	400	24
3	400	24
4	260	24

Covered storage: one transit shed 72,000 sq.ft.

STEVEDORES: Stevedores provided by SPA; labour supplied for working in ships' holds and on ships' winches (if required). For cargo delivered direct ex-wharf consignee provides wharf labour; cargo for Sabah Ports Authority godown labour provided by Sabah Ports Authority.

Working hours/days: Ships can be worked on all days except for 11 state and national holidays when port closed completely. Working hours 0730 to 1130 hrs.; 1300 to 1700 hrs.; 1800 to 2200 hrs. Work beyond these hours possible by application. Additional charges payable.

Deliveries 0730 to 1630 hrs. except Sunday.

Loading/discharging rate: General cargo excluding vehicles and liquid cargo 17.60 B/L tons per gang hour. Palletised (unit-load) cargo 27.4 B/L tons per gang hour.

CARGO: (Also see "Berthing").

1. Tally: The Agent can provide tally clerks at ship's expense.

2. Inward cargo: Ship's responsibility ceases as soon as consignees take delivery ex-sling.

3. Transhipment cargo: Transhipment cargo handles via Port Authority Godown.

4. Outward cargo: All cargo is brought to the ship alongside wharf either by tractors and trailers.

5. Special cargo regulations:

(a) Dangerous cargo. Vessels carrying explosives as cargo: All vessels arriving at, or remaining within the limits of, any port with explosives on board shall fly the gunpowder flag at the foremast.

No vessel having explosives on board shall, without the permission in writing of the Harbour Master, come or remain within 500 yards of the shore or any other vessel:

Provided that such a vessel may, with the written permission of the Harbour Master, come and remain within such limit where:

(i) such explosives are wholly and exclusively of Class V (Fulminate) or Class VI (Ammunition) or both such classes in the second schedule; and

(ii) the total quantity of such explosives does not exceed two thousand pounds; and

(iii) such explosives are carried in a properly constructed magazine duly certified as such by a British Board of Trade Surveyor or by an officer fulfilling similar functions appointed by a Government of any British possession or the vessel has a certificate from one of Her Majesty's Inspectors of Explosives or from an Officer fulfilling similar functions appointed by the Governments of Singapore, the Federation of Malaysia or Hong Kong and approved by the Governor that all the explosives on board such vessel have been properly stored and the Master of such vessel further certifies in writing that no other dangerous cargo is carried by the vessel; or where:

(iv) such explosives are wholly and exclusively explosives of one or any of Class III (Nitro-compound), Class IV (Chlorate mixture) or Class VII (Firework); and

(v) The total quantity of such explosives does not exceed three thousand pounds.

No such explosive shall be landed, shipped or transhipped between sunset and sunrise without the previous permission in writing of the Harbour Master. Any Master of a vessel offending against the provisions of this section shall be liable to a fine of one thousand dollars.

(b) Livestock. Pigs or cattle may not be loaded or discharged on any wharf without permission of the S.P.A.

MEDICAL: Medical Officer of Health: Medical Services Department, tel. 54303. Vaccination and inoculation (incl. Yellow Fever) can be arranged via Agent at any time during working days. In case of death on board, Agent and Harbour Master as well as the Police to be informed.

FRESH WATER: Can be supplied from wharf. Supply rate is 25 tons per hose per hour.

FUEL: Not available.

CONSULS: British Tel. 54056; Indonesian Tel. 54100; Japanese Tel. 54698.

HOLIDAYS: Working on Sundays/holidays is possible against overtime payment. No work will be done on Chinese New Year's Day, Hari Raya Puasa and Christmas Day.

POLICE/AMBULANCE/FIRE: Police 999, Ambulance 54911.

GENERAL: Ship Chandlers: All kinds of stores and provisions available.

Recreation Facilities. Two cinemas in town which show English films frequently. Three tennis courts available and football matches may be arranged. Sports Club is next to town Padang, about half a mile from wharf and golf and yacht clubs situated on beach at Tanjong Aru, 4 miles from town.

Surveyor: Harrisons & Crosfield (S) Ltd. are Lloyd's Sub-Agents and can arrange a surveyor provided prior warning is given.

Fumigation: No facilities.

SHORE LEAVE: Crew members allowed ashore after inspection by Immigration Officer.

REGULATIONS: *(a)* Arrival and Departure. 1. The owner or Agent of every vessel other than a small ship intending to call at a port shall, as soon as possible, and in any case not later than 36 hours prior to the estimated time of arrival of the vessel, give notice in writing to the Authority of such arrival and, if so desired, the requirement for a berth at a wharf.

2. The notice under this regulation shall be in a form prescribed by the Authority and shall contain full particulars regarding the cargo to be discharged and loaded, the embarkation and disembarkation of passengers, heavy lifts, special or perishable cargo, hazardous and dangerous goods (whether to be discharged at the port or not), and any other matters of importance relating to the working or safety of the vessel in the port.

3. The Master of every vessel entering or leaving a port between sunrise and sunset shall cause to be hoisted the national colours and the signal letters, if any, of the vessel. The national colours shall be exhibited from 0800 hrs. to sunset whilst the vessel remains in port.

4. The Master of every vessel arriving from outside the State of Sabah shall exhibit the Immigration and Quarantine signals contained in the First Schedule and shall also at the request of a Customs officer hoist the Customs signals. Such signals shall remain exhibited until the appropriate officer has given permission for them to be lowered.

5. No vessel shall approach within 600 ft. of any other vessel exhibiting the Immigration, Health or Customs signals.

6. No person other than a Pilot may board or disembark from any vessel until the vessel is cleared inwards and the Immigration, Quarantine and Customs signals have been lowered.

7. Every vessel entering a port shall be anchored or efficiently secured to a wharf or buoy before commencing the loading or discharging of cargo and/or the embarkation or disembarkation of passengers.

8. No vessel shall leave any port unless in possession of a valid Port Clearance issued by or on behalf of the Director of Marine.

(b) Special signals.

Significance	*By Day*	*By Night*
Immigration (for ships not carrying passengers)	International Code Signal "2 5"	Two green lights, 6 ft. apart, hoisted vertically where best seen.
Immigration (for ships carrying passengers)	International Code Signal "3 4"	Two green lights, 6 ft. apart, hoisted vertically where best seen.
Quarantine (vessel is Healthy request pratique)	International Code Signal "Q"	Nil
Quarantine (vessel is suspect)	International Code Signal "Q Q"	A red light over a white light and a separate hoist of red light over a green light and hoisted vertically 6 ft. apart where best seen.
Quarantine (vessel is infected)	International Code Signal "Q L"	
Quarantine (not received pratique)	Nil	A red light over a white light 6 ft. apart hoisted vertically where best seen.
Request Police Assistance	International Code Signal "S T"	A green over a white light, 6 ft. apart hoisted vertically where best seen.
Request Medical Assistance	International Code Signal "W"	A red light over a green light, 6 ft. apart, hoisted vertically where best seen.

(c) Priority. First come first served.

AUTHORITY: Sabah Ports Authority.

AGENT: Harrisons & Crosfield (Sabah), Limited. Telegraphic address "Crosfield". Tel. Shipping Department 52458; Vessels at wharf 52300–54400.

KUCHING, Sarawak: 01.34 N. 110.21 E.

(See Plan Book)

DOCUMENTS:

Port Clearance to be surrendered to Customs when boarding.

Crew Lists and Passenger Lists, 2 copies for Immigration Department, 2 copies for Kuching Port Authority, 3 copies for Customs, 1 copy for Port Health Officer.

List of Ship's Stores (2 copies for Customs).

List of Ammunition (3 copies for Customs).

Health Documents (Vaccination Certificates and Cholera Inoculation Certificates to be examined by Health Inspector).

Manifests (3 sets for Customs, 5 sets for Kuching Port Authority, 1 set for Health Inspector).

Customs: Permit to go alongside a legal landing place or an ocean-going vessel within the port limits is required by Customs 24 hours prior to berthing.

PILOTAGE: Pilot can be applied for through Agents or by direct cable to Marine Dept. giving at least 24 hours notice of ship's arrival time at Tanjong Po. Telegraphic address, "Shipping Kuching". Pilots are embarked either at the position, marked on B.A. Chart 1822, off Tg. Po or at Sejingkat by vessels proceeding further up river to the wharves operated by Kuching Port Authority. Pilot boat "Alor" equipped with VHF.

In rough weather it may be necessary for a ship to follow or meet the pilot launch at the junction of Embang and Senari leads. Pilots for the Batang Lupar, Triso or Lingga Anchorages are also normally embarked off Tanjong Po by arrangement.

APPROACHES: The seaward approach to Kuching port is restricted by the presence of two bars; Outer Bar at a depth of 16 ft. below datum, and the Inner Bar at 15 ft. below datum. The max. depth of high water over the Bar, which occurs at springs is about 31 ft., whilst at neap high waters this decreases to approximately 28 ft. The tidal range is 5 to 17 ft. There are also numerous rocks and shoals in the river.

ANCHORAGES: *(a)* Tanjong Po Anchorage: 045° one mile from Tanjong Po line. Area of safe anchorage is 0.25 mile radius. Depth 6 fathoms. *(b)* Sejingkat Anchorage: For vessel up to 550 ft. long with max. draft 25 ft.

Examination Anchorage: The examination anchorage is re-established off Sejingkat in an area bounded by:—

(a) A line, marking the outer limit, drawn 345° from the Channel Beacon in position Lat 01° 34′ 51″N., Long. 110° 26′ 41″ E.

(b) A line, marking the inner limit, drawn 343° 30′ from the Inner Measured Mile Beacon in position Lat. 01° 34′ 50″ N., Long. 110° 26′ 13″ E.

Vessels are recommended to anchor in the Northern half of the area and shallow draft vessels should berth as close to the Northern bank of the river as is practicable.

Vessels should advise the Marine Signal Station of their arrival using VHF Channel 20. Movement of vessels up river will be controlled from the Marine Signal Station or Marine Office. In order to receive information, vessels should keep watch on VHF Channel 20.

Vessels carrying dangerous cargo will be examined in the existing explosives anchorage.

RESTRICTIONS: Tide restriction and max. draft 17 ft. at high tide. Not advisable to enter port at Tanah Puteh at night.

MAX. SIZE: Max. permissible length overall for vessel entering port at Tanah Puteh is 435 ft. and max. draft 17 ft. Max. overall length for oil carriers proceeding to oil installation at Baiwak Wharf, Pending Point is 400 ft., and max. draft 22 ft. At Pelabuhan Datuk Sim Kheng Hong, the LOA of ship permissible is 550 ft. with a max. draft of 25 ft.

RADIO: ETA cable to ship's Agent can be sent to Department of Communications, Kuching. Code words, Kuching Radio.

VHF direct communication with Port Authority, Channel 16, calling and safety, Channel 20 port operations. Channel 26 public correspondence. Pilot boat and Marine Department also equipped with VHF. Range 25 to 30 miles from Kuching port.

TUGS: 3 tugs, 2 of 1,000 h.p. and 1 of 164 h.p.

BERTHING: Application for berth must be made by Agents at least 24 hours before berthing. Facilities: at *Tanah Puteh* 800 ft. wharf of the deck on piles with shore-bridge type with 122,000 sq. ft. of Covered Storage Space and 195,000 sq. ft. of Open Storage Space; at *Pelabuhan Datuk Sim Kheng Hong* 860 ft. marginal wharves with 82,000 sq.ft. Covered Storage Space and 100,000 sq. ft. of Open Storage. Feeder Container Services are available but ship must provide lift on/lift off gear for ship/shore and vice versa operations. Max. shore facilities – 14 tons gross per container.

STEVEDORES: Gangs required for working vessel for weekdays must be ordered by Agents before 1530 hrs. prior to ship's working the following day. Gangs required for working vessel on Sundays or public holidays must be ordered before 1000 hrs. prior to ship's working on Sundays and public holidays.

MEDICAL: Necessary for Agents to receive advance notice of required medical attention at least 24 hours before arrival. Hospital facilities available. Crew should possess Cholera inoculation and Vaccination Certificates.

TANKERS: Tankers berth at Biawak Wharf, Pending Point, for discharge of their oil. Diameter of pipe line 8 in. Only one tanker can berth at a time and max. draft is 25 ft.

DENSITY: 1008 oz. per cubic ft.

FRESH WATER: Available and can be supplied to vessel alongside Authority's Wharf by hose about 25 tons per hour.

FUEL: High-speed diesel fuel oil can be supplied to vessel by making arrangement with either Shell or Esso Oil installation at Biawak.

GANGWAY/DECK WATCHMEN: Not usually available. Ship should provide own watchmen.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CERTIFICATES: Ship's should possess all relevant certificates on board in case required for reference.

CUSTOMS ALLOWANCE: Tobacco: 1 oz. tobacco or 25 cigarettes or 8 cigars permitted for each crew member daily. Up to three days ration in port. Wines and/or Spirits, eighth qt. bottle of spirits or 0.25 qt. of beer or 1 qt. of wines is permitted for each crew member daily. Up to 3 days' ration in port.

CARGO GEAR: Ship provides own gear especially for handling heavy lifts, vehicles, etc. Rope slings, pallets and safety nets, etc., will be provided by the Authority.

IDENTIFICATION CARDS: Required.

CONSULS: Indonesian.

REPAIRS: Minor repairs to vessels only.

DRY DOCKS: Not suitable for sea-going vessels. Coastal vessels up to 220 ft. long.

REPATRIATION: Facilities available.

AIRPORT: Airport about 6.5 miles from port at Tanah Puteh. It is served by regular airlines which operate two flights daily except on Wednesday and Sunday when 3 flights.

TIME: Local time eight hours ahead of GMT.

HOLIDAYS: Port work can be arranged on all official holidays on overtime rates except Chinese New Year Day, Hari Raya Puasa Day, International Labour Day, (1st May), Dayak Festival Day (1st June), and Christmas Day, during which the port at Tanah Puteh and Pending will be closed.

POLICE/AMBULANCE/FIRE: For emergency call, tel. 999 is applicable to all these three services. Individual call: Central Police Station, 22181; General Hospital, 23151; Fire Station, 21033.

TELEPHONES: Telephones can be provided free of charge on board vessel occupying Authority's berths at Tanah Puteh Wharf.

SHORE LEAVE: Crew members are allowed ashore provided permission is granted by Immigration Department.

REGULATIONS: Refer to Sarawak Merchant Shipping Ordinance and Kuching Port Authority's Ordinance and Bye-laws.

DELAYS: At present ships can normally secure a berth within 24 hours of arrival if tide is right.

AUTHORITY: Kuching Port Authority.

KUNAK, Sabah: 04.41 N. 118.15 E. **(See Plan Book)**

Sabah Government Requirements

(a) Customs will treat port as sufferance wharf as defined in Section 2 of Customs Ordinance (Cap. 33), with control from Lahad Datu. Agent will be required to make application to Customs for sufferance facilities in respect of each vessel, on appropriate form. Officer-in-Charge of Customs, Lahad Datu will arrange to send a supervising officer with ship; this officer will attend vessel's inward and outward Customs clearance. Transport, food and shelter of Customs Officer are for vessel's account, though it is envisaged that his transport can be concurrent with boarding and departure of the Pilot, i.e. per Marine Department launch.

(b) Immigration requires that vessel shall be cleared inwards and outwards in Lahad Datu. As Marine Department launch will be required to run mooring lines at Kunak, it will not be available to transport Immigration Officer who will *not* accompany vessel. His transport will therefore be a matter for Agent to arrange.

(c) Medical will grant pratique by radio by Medical Officer, Lahad Datu: whose right to carry out full inspection is not affected thereby. This will only be exercised, it is anticipated, when vessel has called at an infected port within prescribed period. Radio messages should therefore give this information, e.g. "Malay Maru Hongkong Twentieth Tokyo Thirtieth Manila Second All Well Request Pratique Master".

(d) Marine Dept. in the case of a vessel arriving from foreign ports will ultimately place a Pilot on board in Lahad Datu, if requested.

(i) Pilot will receive vessel's arrival report and sight her last port clearance. Pilotage will commence at any such point on route as Master may request, at rates laid down in the Merchant Shipping (Fees) Regulations, 1961. The Pilot launch carrying berthing crew will arrive in advance of vessel at Kunak and assist in making fast.

(ii) As there is no accommodation available at Kunak, the Pilot it is hoped, can be accommodated on board ship during her stay.

(iii) Return to Lahad Datu will follow as in sub-para (i) with the Pilot issuing Port Clearance on completion of Immigration formalities.

(iv) Requests for Pilot should be made *at least* 24 hours in advance to Marine Sandakan via Sandakan Radio, 9WHZ1. Initially this service will be offered from Sandakan, and ships proceeding Kunak from there will retain the Pilot on board. Ships from foreign ports will be served by air; charges to their account. There is now a Pilot based at Tawau, who will berth vessels at Kunak.

For information the port limits of Lahad Datu are "a line drawn from Tanjong Melandong on the South-west point of Darvel Peninsula to the most Westerly point of Sakar Island and thence to the mainland, etc." From this it can be seen that large vessels need not enter the narrow waters of the inner bay.

BERTHING: 1. Wharf consists of,

(a) A raised cement platform 30 ft. × 30 ft. on wooden piling.

(b) Three lazy piles with rubber fendering situated 20 ft. from the front edge of the platform and 125 ft. in each direction from the centre of the platform.

(c) Two cement mooring dolphins 20 ft. × 20 ft. situated 350 ft. each side of the platform and 50 ft. from the rear edge of the platform.

(d) A metal jetty approach 10 ft. wide × 350 ft. long.

(e) A coral bund 24 ft. wide at the base and approximately 16 ft. wide at the top.

(f) Mooring Buoy placed 600 ft. off head of jetty.

2. Depth of water alongside: Minimum depth of water outside the lazy piles is in excess of 35 ft. datum.

3. Bulk oil will be pumped from installation along a metal pipe via coral bund and metal jetty. At a point approximately 15 ft. before cement platform the pipe bifurcates and the two terminals are situated two-thirds the way along each side of platform. To these terminals will be attached a flexible steel hose for connection with ships. Hose will be provided by shippers, and is 400 ft. long if required.

4. Pumping capacity. Maximum overall rate of pumping palm oil will be 100 t.p.h. Palm oil pipe is of 6 in. diameter.

AUTHORITY: Port Manager, Tawau.

AGENT: Harrisons & Crosfield (Sabah) Ltd., PO Box 131, Sandakan, Sabah, Malaysia. Telegraphic address "Crosfield Sandakan". Tel. 2141. Code-Bentley's Second Phrase.

LABUAN, Sabah: 05.17 N. 115.15 E. **(See Plan Book)**

Island of Labuan is 12 miles long and 7 miles wide lying off N.W. coast of Borneo at entrance to Brunei Bay. It is part of State of Sabah and is only 4.5 miles from mainland and some 77 miles from the State Capital of Kota Kinabalu.

DOCUMENTS:

(a) On arrival, when vessel has arrived from ports outside Sabah, Health Officer, Boarding Officer, Customs and Immigration or their representatives will board vessel. Agent cannot board until ship has been cleared.

(b) Health Officer will require Maritime Declaration of Health duly completed together with one copy of passenger list and one copy of crew list whenever vessel's last port of call has been outside State of Sabah.

(c) Boarding Officer will require one copy of Shipping Arrival Report, one copy of passenger list and one copy of crew list. He will also inspect various Certificates such as Load Line, Life Saving Equipment etc.

(d) Following is summary of documents required:

	Customs	*Immi-gration*	*Boarding Officer*	*Agent*	*M.O.*
Passenger List	2	2	1	1	1
Crew List	2	2	1	1	1
Store List	2	—	—	1	—
Maritime Declaration of Health	2	—	—	—	1

(e) To be supplied before Departure:

Manifests as necessary.

Captain's copies of Bills of Lading.

Port Clearance.

Customs Clearance.

Certificate of *(a)* Buoys and Lights Dues and *(b)* Port and Harbour Dues.

PILOTAGE: Pilot available if adequate notice given but pilotage not compulsory. Vessels normally berth between 0600 and 1800 hrs., unberthing at any hour, day or night, provided that notice of such movements received between 0800 and 1600 hrs.

ANCHORAGES: Good anchorage for large vessels in a least depth of five and three-quarters fathoms South and S.E. of No. 6 Beacon.

Quarantine. Vessels arriving from an unhealthy port should proceed to quarantine anchorage for pratique. This anchorage is bounded on North by a line drawn 090° from Harbour Shoal Beacon to Eastern Harbour Limit; South by a line drawn between S.W. point of Papan Island and Enoe Beacon; on West by Eastern Boundary Limit of Explosives Anchorage (as under). If vessels arriving from healthy port and healthy themselves, they need not proceed to Quarantine Anchorage.

Explosives. No vessels having explosives on board may come or remain within 500 yards of shore or of any other vessel; such vessels shall fly Gunpowder Flag at foremast, and should anchor in Explosives Anchorage which is within a line drawn from Enoe Beacon to Harbour Shoal Beacon thence in 090° for 6 cables thence in 180° direction until it joins line between S.W. point of Papan Island and Enoe Beacon.

Dangerous Petroleum. A vessel having dangerous petroleum on board shall anchor within a line drawn from Harbour Shoal Light beacon in a 360° direction for 2,500 ft., thence in a 090° direction for 3,600 ft., thence in a 180° direction to join Northern boundary limit of Explosives Anchorage.

Prohibited Anchorage. No vessel shall anchor within 2,000 ft. from the light of Southernmost dolphin of Liberty Pier.

RESTRICTIONS: Tides. Subject to diurnal inequalities but usually one high water and one low water a day. Average high water is 6.5 ft. and low water 3 ft. above datum of soundings.

Clearance. Port is open from 0600 to 1800 hrs. although vessels can be cleared later than 1800 hrs. on application provided they are sighted from Papan Lighthouse at 1800 hrs.

HEALTH: See "Regulations" and "Anchorages".

RADIO: Information required before ship's arrival. ETA Labuan, with as much prior notice as possible. Number of gangs required Quantity of fresh water required. Whether Pilot required for berthing.

Labuan has no radio facilities and messages are received via Kota Kinabalu, Miri, Singapore, etc.

Port VHF Service operates on Channels 16 and 12, between 0530 and 2400 hrs.

TUGS: One tug, 750 b.h.p., twin screw, available to assist with berthing and unberthing.

BERTHING: 1. Wharves.

(a) Liberty Wharf – A permanent concrete wharf, measuring 800 ft. with dolphins 100 ft. off each end – least depth of water is 28.5 ft.

(b) Victoria or Small Ships' Wharf (marked on Chart as H. & C.'s Wharf). A wooden structure – length 270 ft. with min. depth of 12 ft. No longer useable except by kumpits. No vehicles allowed on wharf.

(c) New Shell Installation Wharf. Concrete jetty 170 ft. long with two dolphins at each end with a total length between of 700 ft., least depth of water 31 ft.

(d) Brown & Root Jetty – A timber decked jetty with following dimension:

Length of main jetty – 160 ft., width 40 ft.
Length of causeway – 476 ft., width 22 ft.
Least depth alongside approximate 28 ft.
Max. load (proven) – 800 lb./sq.ft.
Max. single approximate 100 short tons.

2. Buoys: No mooring buoys in Labuan.

3. Monsoons. N.E. monsoon prevails from December to April and S.W. monsoon from middle of May to middle of October. Harbour is well sheltered from both monsoons.

4. Flags and Berthing Signals:

(a) When entering port vessel should fly Signal Letters, Mail Flag if applicable, and "G" flag if requiring Pilot, and also Quarantine Flag.

(b) Berthing Signals. Following berthing signals will be used at Labuan and will be displayed from Flagstaff in Harbour Office in vicinity of Liberty Wharf, Victoria Harbour. A red and white chequered flag and International Code numbered pendant will indicate berth number allocated. Berth numbers have been allocated as follows:

(c) Berth and Pendant No.

1. Esso Wharf.
2. LCT. Landing Ramp.
3. Victoria Wharf (small ships) S.E. Section.
4. Old Liberty Wharf (inner section).
5. Old Liberty Wharf (outer section).
6. New Liberty Wharf (inner section).
7. New Liberty Wharf (outer section).
8. Brown & Root Jetty.
9. Shell Installation Jetty.
10. Anchor.

On receipt of berthing signal, vessel should acknowledge in the usual manner with the answering pendant and proceed to berth.

(d) Tidal Signal. A tidal signal consisting of a cone and ball is hoisted in conjunction with berthing signal showing state of tide at berth indicated. A cone point down signifies flood tide (West-going), a cone point up ebb tide (East-going), a ball slack water.

(e) Facilities. Max. single load without special precautions on Old Liberty Wharf is 25 tons and New Liberty Wharf is 650 lbs/sq. ft. i.e. 180 tons four axle vehicles. Any load over this figure will require to be distributed over two or more panels of 10 ft. by 10 ft. each according to weight. However, special arrangements must be made prior to discharge, and Agent should be consulted in advance.

STEVEDORES: Supplied by contractors as arranged by Agent. Working hours 0800–1200 hrs., 1300–1700 hrs. Working outside these hours on Sundays and Public holidays is overtime.

CARGO: 1. Inward. Inward cargo is tallied out of ship on to wharf or into lighter. Damaged cargo is surveyed on the spot, otherwise no liability of the vessel is acknowledged. Discharge is carried out after permission has been obtained from Customs after manifest of inward cargo has been deposited. Cargo is delivered to consignees against production of relative Bill of Lading. Ship's responsibility to consignees ceases at ship's side but, in the case of shortlanded cargo, reasonable proof must be given to Customs that the cargo has not been landed. A shortlanded Memo certified by the Chief Officer is usually accepted as proof.

2. Transhipment. After discharge of cargo from the 1st carrier, transhipment cargo is placed under supervision of Customs, unless it is possible to arrange direct transhipment into small coastal vessel. Customs do not accept responsibility for cargo in Customs Bond.

3. Refrigerated. Only small quantities of refrigerator cargo loaded or discharged.

4. Explosives. Explosives must be discharged into lighters under police escort and transported to an approved police store. A licence for their importation must be obtained from the police prior to arrival of cargo, and harbour and police authorities must be informed of arrival of explosives in port either for discharge or as through cargo.

MEDICAL: Hospitals. Not possible for Government Medical Officer to visit ships but patients can be sent to Cottage Hospital. Four 1st class beds, 10 2nd class beds, 46 3rd class beds.

Dentist. A Government Dental Clinic, located in Cottage Hospital area. In addition, a dentist is available in town.

TANKERS: See "Berthing".

FRESH WATER: Only available in small quantities (usually 30 tons maximum) and at restricted hours.

FUEL: Bulk furnace oil and high speed diesel usually available but 48 hours notice of requirements must be given.

FIRE PRECAUTIONS: In case of fire, the Harbour Master, OCPD, and Agent should be telephoned immediately. A mobile gas turbine fire pump is available.

CONSULS: None.

REPAIRS: Slipways of up to 500 tons displacement, and Marine Department can undertake minor repairs.

POLICE/AMBULANCE/FIRE: Medical Officer 224; Asst. Commissioner of Customs 201; OCPD 400; Police Station 297; Hospital 222.

GENERAL: *Surveyors.* Harrisons & Crosfield are Lloyd's Sub-Agents in Labuan and may appoint a surveyor as necessary.

Ship Chandlers. Fresh fruits, vegetables and fish available and price list can be obtained from ship chandler through Agent. Cold storage with limited supplies.

Recreation Facilities. If owners pay a monthly subscription to the Labuan Recreation Club, ship's crew are automatically members. Football and cricket, etc., can usually be arranged on application to Agent. Two cinemas in town which show American, English, Chinese, Malayan and Indian films.

Good beaches all round island, however, it is strongly recommended that bathers should remain in shallow water. It is not considered safe to bathe from the ship.

Victoria Hotel situated in town. All rooms air-conditioned and have private bathrooms or showers attached. Lodging house accommodation available in town for Chinese Crew members.

REGULATIONS: *(a)* Arrival and departure. 1. The Owner or Agent of every vessel other than a small ship intending to call at a port shall, as soon as possible, and in any case not later than 36 hours prior to the estimated time of arrival of the vessel, give notice in writing to the Authority of such arrival and, if so desired, the requirement for a berth at a wharf.

2. The notice under this regulation shall be in a form prescribed by the Authority and shall contain full particulars regarding the cargo to be discharged and loaded, the embarkation and disembarkation of passengers, heavy lifts, special or perishable cargo, hazardous and dangerous goods (whether to be discharged at the port or not), and any other matters of importance relating to the working or safety of the vessel in the port.

3. The Master of every vessel entering or leaving a port between sunrise and sunset shall cause to be hoisted the national colours and the signal letters, if any, of the vessel. The national colours shall be exhibited from 0800 hrs. to sunset whilst the vessel remains in port.

4. The Master of every vessel arriving from outside the State of Sabah shall exhibit the Immigration and Quarantine signals contained in the First Schedule and shall also at the request of a customs officer hoist the Customs signals. Such signals shall remain exhibited until the appropriate officer has given permission for them to be lowered.

5. No vessel shall approach within 600 ft. of any other vessel exhibiting the Immigration, Health or Customs signals.

6. No person other than a Pilot may board or disembark from any vessel until the vessel is cleared inwards and the Immigration, Quarantine and Customs signals have been lowered.

7. Every vessel entering a port shall be anchored or efficiently secured to a wharf or buoy before commencing the loading or discharging of cargo and/or the embarkation or disembarkation of passengers.

8. No vessels shall leave any port unless in possession of a valid Port Clearance issued by or on behalf of the Director of Marine.

(b) Special signals.

Significance	*By Day*	*By Night*
Immigration (for ships not carrying passengers)	International Code Signal "2 5"	Two green lights, 6 ft. apart, hoisted vertically where best seen.
Immigration (for ships carrying passengers)	International Code Signal "3 4"	Two green lights, 6 ft. apart, hoisted vertically where best seen.
Quarantine (vessel is Healthy request pratique)	International Code Signal "Q"	Nil
Quarantine (vessel is suspect)	International Code Signal "Q Q"	A red light over a white light and a separate hoist of red light over a green light and hoisted vertically 6 ft. apart where best seen.
Quarantine (vessel is infected)	International code Signal "Q L"	
Quarantine (not received pratique)	Nil	A red light over a white light 6 ft. apart hoisted vertically where best seen.
Request Police Assistance	International Code Signal "S T"	A green over a white light, 6 ft. apart hoisted vertically where best seen.
Request Medical Assistance	International Code Signal "W"	A red light over a green light, 6 ft. apart, hoisted vertically where best seen.

AUTHORITY: Harbour Master.

AGENT: Harrisons & Crosfield (Sabah) Limited, PO Box No. 7, Labuan, Sabah, Malaysia. Telegraphic Address "Crosfield". Tel. 218, 219.

LIMBANG, Sarawak: 04.48 N. 115.05 E.

Limbang is the principal town of the Fifth Division and is situated 8 miles above the entrance of the Limbang River. There is an anchorage for ocean-going steamers 5 miles below the Limbang bar buoy with a least depth of 26 ft.

Depth on Bar. The least depth reported on the bar is about 2 ft. with a highest rise of 12 ft. The channel is marked by stakes with red/white and black/white topmarkers and a flashing light buoy Fl.1 sec. at the entrance.

Every vessel arriving in quarantine shall fly or show the appropriate International Quarantine signal; and no person other than a Pilot, Port Officer, Port Health Officer, Immigration Officer or Officer of Customs shall board the vessel; and no person shall disembark therefrom until the vessel has been cleared by the Port Health Officer.

The Master of every vessel of over 15 tons about to depart from a port for any place outside Sarawak shall cause the "Blue Peter" (International Code Flag "P") to be hoisted, during daylight hours, for at least twelve hours before the vessel is due to sail, or if the vessel is in port for less than 12 hours, for the period of her stay in the port.

(1) The Master or the Agent of every vessel about to depart from a port shall, on demand by the Port Officer, produce for inspection the Port Clearance.

(2) The Port Clearance shall be in the form of an endorsement on the form of clearance prescribed under the Customs Ordinance or in such other form as may be approved by the Director.

A vessel arriving in, leaving from or shifting berth within a port shall hoist her signal letters, if any, whilst under way.

LUMUT Malaya: 04.14 N. 100.38 E.

SHIPMASTER'S REPORT: 1977.

DOCUMENTS:

Customs:

3 Crew lists.
3 Passenger lists.
3 Dutiable stores statements.
3 Discharging manifests (NIL Return required).
2 Personal effects lists.
2 Lists cargo in transit.
2 Lists arms & ammunition (NIL certificate required).
Last port clearance.
3 Copies loading manifests.
Register, load line & De-rat documents.

Immigration:

2 Crew lists.
2 Passenger lists.
2 Health forms.

Boarding Agent:

1 Report of arrival.
1 Crew list.
1 Passenger list.
1 Arms & ammunition list (NIL return required).

The Agent at Singapore informed me that Immigration clearance may be hurried along if two crew lists can be posted to them from the previous port, providing that the Smallpox certificates are all up to date and that the vessel is not coming from an infected area.

PILOTAGE: Pilot boarding position 4° 10′ 30″ N., 100° 35′ E., which is one mile South of Pangkor Island S.E. Point light. Berthing and unberthing will only be carried out during daylight hours and at slack water or beginning of flood tide. Pilot comes from Penang for berthing and unberthing. Pilot leaves vessel at Hospital Point on departure. Pilot launch painted blue with white superstructure and named "King Miller". Pilot rates:— $900 in & out, launch fee $150 & service fee $400 covering travel, accommodation, meals etc.

ANCHORAGE: Just inside harbour limits, 7 cables South of S.E. Point light in about 12 fms. Bottom said to be sand & shells and reputed good holding ground.

MAX. SIZE: Max. length on grain berth 575 ft.

Max. draft into port 30 ft. 6 in. salt water on Spring tides. This is due to a bar at the entrance of Dinding River and a rather sharp turn around buoy of 125° to miss rocks marked by unlit buoy. (Lloyd Rocks B. A. Chart 792 vicinity of River Passage).

RADIO: *ETA's:* Sent through Penang or Singapore Radio to Flourmill Kuala Lumpur and ship's Agents. 72, 24 & 12 hours notice required. Agents will keep Flourmill Lumut and Pilots informed. Authorities like 5 days notice of a vessels impending visit.

VHF: There are no VHF communications in the port or with pilot boat.

TUGS: There are no tugs at Lumut — nearest Penang (small) and Singapore (large).

BERTHING: Port side to at Malaysian Flour Mill Private Wharf in position 4° 16′ N. 100° 39.5′ E., ship's head in. Depth of water at wharf is 32 ft. 06 in. A modern wharf supporting one moveable discharging elevator. Conveyor belt runs under wharf.

South side of dock is used by coastal tankers and has 20 ft. of water. Dock is of concrete construction with heavy wood and steel girder fendering which is rubber mounted. End of wharf has a separately fendered concrete construction which is fitted with rubber shock absorber.

STEVEDORES: Mill employs own stevedores and work continues throughout 24 hours. No cargo work on Sundays. Discharge rate is about 118 m.t.p.h. with 2 suckers (wheat). Reported to be about 100 m.t.p.h. with corn.

MEDICAL: Doctor in Lumut and Sitawan (7 miles from Lumut). Local hospital usually has large queue, therefore better to attend private doctor.

DENSITY: Water is brackish both at anchorage and berth. About 1022 ozs/cu. ft. at berth.

FRESH WATER: Available on berth arranged through Flour Mill.

FUEL: By special arrangement only and brought to ship in road tankers. Cargo cannot be discharged while bunkering as the trucks are not able to pass under or by the grain discharger (Agent informed me that two weeks notice required for bunkers). Fuel and diesel supplies come from Lahat about 50 miles from Lumut but there are many Customs problems re-clearance.

REPAIRS: Minor repairs only, firms can be called in from Kuala Lumpur or Singapore.

GANGWAY/DECK WATCHMAN: Private wharf and protected area - no shore watchman required on board -only ship's watchman for ropes and safety. Shore mill patrol is armed with shotgun.

REPATRIATION: No problems but make sure travel documents i.e. passports, are valid.

AIRPORT: Nearest local airport is Ipoh and then fly or by road to Kuala Lumpur International Airport. Ipoh is about 1.5 hours drive and Kuala Lumpur 6 hours drive.

TELEPHONE: None on berth, nearest is in Flour Mill entrance hall but very noisy due to mill working.

SHORE LEAVE: Local leave only, except with special permission and pass. Boats to be laid on by ship for crew shore leave to Lumut and this is about a 20 minute boat ride to shore. Charges – 0700 to 1800 hrs. $15, and 1800 to 0700 hrs. $20 per trip. A boat from the anchorage may be laid on and this costs $75. Boat service is run by Mr Loo Yean Lai, No. 3, Damar Laut, Lumut – He can usually be found on waterfront by Customs office.

GENERAL: The Flourmill is situated on the N.E. side of Lumut about 40 miles by road and 20 minutes by launch from Lumut town. There is a good canteen at the Flourmill which serves European, Chinese and Muslim foods, soft drinks and beer. Ship's personnel are allowed and welcome to use these facilities.

There are only two reasonable hotels in Lumut, Dinding Hotel which has only three rooms air conditioned, and The Rest House which is not air-conditioned. If possible book in advance especially on Saturdays, Sundays and Holidays.

Football matches can be arranged and Customs, Flourmill etc. are all very keen to play ships visiting the port. Hire of the football pitch which is in the centre of town and very good is only $5.

A soya bean mill is expected to complete construction in 1980/1981 and will use the same wharf for discharge.

Customs: Allowances very small – 75 cigarettes per man for three days and one bottle of spirits for eight men every three days. Customs office is on shore near to ferry berth. One and sometimes two, customs men remain on vessel throughout and accommodation is to be provided for them.

Immigration: No immigration if from Malaysian ports but clearance required when from foreign.

Tide: Ebbs for 5.25 hours on berth. Tides times are based on Port Kelang – difference is minus 1 hr. 40 mins. Rise and fall about 2 m. – see Admiralty Tide Tables and Admiralty N.P. 214, Malacca Strait and Southern Approaches to Malacca Strait. Atlas of Tides and Tidal Streams.

Provisions/Stores: Limited supplies available. Fruit and vegetables are available in season from local supply and are reputed to be reasonably priced. Some fruit and vegetables imported and may be expensive. Chandlers T/A Hin Wah Siong Tiam are the local (only) chandlers.

Laundry; Arranged by Chandler (see above), takes about three days as is done by hand.

Charts: BA 1009 Perak River & Approaches when approaching from South and BA 792 Dinding River & Approaches with inset covering flour mill wharf.

MALACCA, Malaya: 02.15 N. 102.15 E.

DOCUMENTS:

1. *Harbour Master's Office, Marine Department*

(a) "Report of Arrival of Vessel" on prescribed Form (Marine 28) obtainable from Harbour Master's Office on arrival.

(b) One copy Passenger List, specifying names and nationalities and required to report any casualties, accidents, births or deaths that have occurred during the voyage to the passengers, crew, ship or cargo.

(c) Port Clearance from last port and copy of Manifest of Cargo to be discharged.

(d) List of all arms and explosives on board.

(e) In the case of a British or Malaysian vessel and vessels belonging to a nation not having a Consular Officer at the port produce to Port Officer the Certificate of Registry and ship's Articles.

(*f*) All ship's certificates such as Safety Equipment Certificate, Radio Certificate, Load Line Certificate, Safety Construction Certificate, Ship's Registry, Passengers' Certificate, Derating Certificate and all Certificates of Competency of all Officers on board.

(*g*) Crew List.

2. *Immigration Authorities*

(*a*) Crew List (3 copies).

(*b*) Passenger List (3 copies).

(*c*) Produce all passengers passports/visas.

(*d*) Produce all seamen's cards.

(*e*) Forms A and B – "Immigrant and Emigrant" obtainable from Immigration Department on arrival.

3. *Port Health*

(*a*) Crew List showing last date of vaccination.

(*b*) Passenger List, showing the last date of vaccination.

(*c*) Produce all seamen's and passengers' vaccination cards.

4. *Customs Department*

(*a*) Crew List (2 copies).

(*b*) Passenger List (2 copies).

(*c*) Personnel Effects List (2 copies).

(*d*) Cargo Manifests (2 copies).

(*e*) Last Port Clearance.

(*f*) Bonded Stores List (2 copies).

(*g*) Full and correct statement of dutiable goods carried as ship's stores (2 copies).

(*h*) Customs Form CD 15 obtainable from Customs Department on arrival.

APPROACHES: No difficulty from North or South. No sand bar at river mouth. Harbour open all year round.

PILOTAGE: None. See "Developments".

ANCHORAGES: For ocean-going and coastal vessels anchorage between 1—1.5 miles off Malacca Harbour. Between 3–6 fathoms depth. No specific prohibited anchorage.

TUGS: None.

BERTHING: None. Discharging into lighters at anchorage. See "Developments".

STEVEDORES: Discharging cargo capacity per day – 1,000 tons.

MEDICAL: Modern Government hospital. All surgical and medical facilities available.

FRESH WATER: None. See "Developments".

FUEL: None.

DEVELOPMENTS: A deepwater berth – least depth alongside 36 ft. is due to open early 1979. Jetty "T" head connected to shore at Tanjung Bruas (approx. position 02° 13′ N. 102° 09′ E.) by approach bridge. Length of berth 368 ft. Fresh water supply will be provided at the berth.

A prohibited anchorage area will be established off the jetty "T" head.

Quarantine and Explosives Anchorages will also be designated.

Pilotage will be available for vessels berthing at the deepwater berth.

CUSTOMS ALLOWANCE: Tobacco, cigarettes 25 in number per man per day, or cigars, 8 in number per man per day, or Tobacco, 1 oz. per man per day, or snuff, 1 oz. per man per day.

Wine and/or Spirit: Spirit, eighth of a quart per man per day, or wines, 1 quart per man per day, or beer or stout, 1 quart per man per day.

REPAIRS/DRY DOCKS: None.

HOLIDAYS: Official holidays in the state as follows: New Year's Day, 1 day; Chinese New Year's Day, 2 days; Muslim New Year's Day, 2 days; Wesak's Day, 1 day; His Majesty's Birthday, 1 day; Prophet Mohammad's Birthday, 1 day; His Excellency Governor's Birthday, 1 day; Malaysia Day, 1 day; Deepavali, 1 day; Hari Raya Huji, 2 days; Christmas Day, 1 day. No cargo is worked on any of the above gazetted public holidays – port closed.

AIRPORT: Batu Berendam, 6 miles from port – commercial airlines daily.

AUTHORITY: Marine Department, Malacca and Port Dickson.

MIRI, Sarawak (incl. Lutong): 04.26 N. 113.55 E.

Miri Roads is an open roadstead in a shallow bay, bounded at North by Tanjong Baram and at South by Tanjong Lobang.

PORT LIMITS: Outer: within an area to Northward of Lat. 04° 22′ N., Eastward of Long. 113° 55′ 30″ E. and Southward of Lat. 04° 31′ N.

DOCUMENTS: (*a*) *Health.* Vessels exempted from inspection (see "Health") should deliver to Berthing Master on arrival, a Declaration of Health, Last Port Clearance and 2 Crew and Passenger Lists.

(*b*) *Inward Clearance* (also see "Anchorage"). All vessels calling Miri Roads for passengers or cargo must be cleared by Immigration and Customs and, if necessary, by Port Health.

Inward clearance effected only between 0600 and 1800 hrs. and following signals must be shown: if passengers carried, flags "3" and "4"; if no passengers carried, flags "2" and "5"; if free pratique requested, flag "Q".

Following papers will be required on arrival for inward clearance:

Port Health:

Declaration of Health.

1 Crew List.

1 Passenger List, inward and through.

Customs Boarding Officer:

As above, if not boarded by Health Officer, and 2 Inward Cargo Manifests.

(*c*) *Outward Clearance.* For vessels that have called to lift bunkers only at Lutong Moorings, clearance will be issued by Berthing Master.

Other vessels will be issued a Port Clearance by Customs Officer on board who will require: 1 Outward Manifest and, if any embarked, 1 Outward passenger list.

APPROACHES: The loom of gas flares on Seria Oilfields 30 miles N.E. of Miri are a general guide at night but should not be used as a bearing because flares movable within area of oilfield and liable to be extinguished at any time. Following bearings exist. By night, three lighthouses:

(*a*) *Tanjong Baram* 04° 35′ 47″ N. 113° 58′ 25″ E. white single light 680,000 candle power, visibility 17 miles, elevation 120 ft. in grey steel lattice tower, group flash three every twenty seconds.

(*b*) *Lutong* 04° 28′ 30″ N. 113° 59′ 46″ E., white single light, 13,500 candle power, visibility 10 miles, elevation 80 ft. in grey steel lattice tower, group flash two every ten seconds.

(*c*) *Tanjong Lobang* 04° 21′ 48″ N. 113° 57′ 36″ E., white single light 20,150 candle power, visibility 18 miles, elevation 155 ft. in grey steel lattice tower, 60 ft., flash one every ten seconds.

By day, above lighthouses difficult to distinguish and following may be used for day-time bearings:

(*a*) Lutong radio mast F.R 210 ft., position 04° 26′ 25″ N. 113° 59′ 54″ E.

(*b*) Tanjong Lobang radio masts as marked on chart.

PILOTAGE: No official Pilot stationed at Miri but Shell Company provide Berthing Masters to moor vessels at their Lutong Moorings (see "Tankers").

ANCHORAGE: For cargo, passengers or clearance. It is recommended that vessels anchor close inshore directly opposite Miri River Mouth, but caution must be exercised as sudden squalls and swell up to 4 ft. can occur, for which allowance should be made.

Cargo usually worked into or from wooden lighters of 30 to 35 tons capacity. Swell often restricts work to landward side only and swell or wind often make it difficult to work Hatch No. 1 in some vessels. Accommodation ladder should be lowered on landward side to enable shore personnel to board.

Prohibited Anchorage and Berthing Area. From (*a*) 4° 30′ 54″ N.; 113° 56′ 19″ E. in a 090° direction to the shore; and from (*a*) to (*b*) in 4° 27′ 30″ N.; 113° 47′ 01″ E., thence in a 090° direction to the shore.

HEALTH: Every vessel arriving in quarantine shall fly or show the appropriate International Quarantine signal; and no person other than a Pilot, Port Officer, Port Health Officer, Immigration Officer or Officer of Customs shall board the vessel; and no person shall disembark therefrom until the vessel has been cleared by the Port Health Officer.

Free pratique granted without health inspection to vessels calling to lift bunkers only at Lutong Moorings, provided ship healthy. Vessels with unclean bill of health or vessels which have not declared themselves healthy in their arrival notice telegram are subject to normal Port Health inspection procedure. Therefore of utmost importance that arrival notice is sent not less than 24 hours before arrival and contains all information requested (see "Radio") in order to prevent unnecessary delay.

RADIO: Miri Control call sign 9 WW21, frequency 500 kc/s., operates at following hours local time: 0900–0930, 1300–1330, 1700–1730, 2100–2130. Present station has a limited range and if difficulty is experienced making contact, vessels should pass messages through other stations, such as Singapore radio, or through other ships in close vicinity of Miri.

Arrival notice must be telegraphed at least 24 hours before arrival and should contain following information:

All vessels

(*a*) expected time of arrival (local time GMT plus 8 hours);

(*b*) name of last port of call and next port of call, if not previously advised;

(*c*) whether or not ship is healthy.

For bunkers

(*d*) quantity of bunkers required, in long tons at least 48 hours notice is required;

(*e*) provisions or medical attention required, if any.

For cargo

(*f*) tonnage to discharge, if any;

(*g*) number of gangs required to load;

(*h*) number of winchmen required to load.

Passengers

(*i*) number of passengers to disembark.

BERTHING: Cargo vessels – see "Anchorage", oil carriers – see "Tankers".

MEDICAL: Treatment of urgent cases available on shore subject weather conditions. Early notice should be telegraphed of medical requirements.

TANKERS: Lutong Terminal position 04° 30′ N., 113° 57′ E. (approx.). Open sea berths lying about 3 miles offshore just Northward of Lutong River mouth. Berthing any hour day or night. Await Berthing Master in area bounded by lines joining following positions: 04° 25′ N. 113° 56.25′ E.; 04° 25′ N. 113° 55′ E.; 04° 26.25′ N. 113° 55′ E.; 04° 26.25′ N. 113° 56.25′ E.

Pilot ladder should be rigged for Berthing Master, and starboard derrick near fuelling connection should be topped-up and rigged to lift heavy equipment required for mooring and connecting pipe-lines and which has to be taken on board before proceeding to mooring berth.

Moorings are in a prohibited area which must not be entered without a Berthing Master of Sarawak Shell Oilfields Limited on board.

Berth	*Max. length*	*Max. draft*
SBM 1	600 ft.	40 ft.
SBM 2	750 ft.	40 ft.
SBM 4	820 ft.	44 ft.

No slop discharge facilities.

FRESH WATER: No fresh or boiler water available.

FUEL: No ex-barge facilities but bunkers obtained from Lutong Terminal.

Nos. 2 and 4 Sealines. Available for bunkering dry-cargo vessels. Ship's spring wire will be used to haul ends of mooring wires on board and mooring winches should be double gear and in all respects ready for use. All other gear for mooring and connecting pipes is brought on board with Berthing Master at Pilot Station. Bunkers will be supplied through 8-in. flexible hose brought up on starboard side amidships and appropriate flange on ship's connection should be removed in advance. Berthing Master will remain on board throughout bunkering operation and will leave after vessel has unberthed. Mooring and unmooring operations each require about 1.5 hours and bunkering rate usually 45–75 t.p.h.

CUSTOMS ALLOWANCES: Bonded Store on vessels other than those berthing at Lutong Moorings for bunkers only and exempted from formal clearance, sealed by Customs after allowing a daily ration for duration of stay in port.

1 Customs Officer will remain on board all vessels anchored in Miri Roads and accommodation, if necessary, should be arranged for them. The Agents' staff will remain on board throughout all cargo operations and it would be highly appreciated if meals could be supplied to them and to the Customs Officer in view of the long time occupied travelling by launch between ship and shore.

AIRPORT: Distant 10 miles. Daily flights.

TIME: GMT plus 8 hours. Permanent.

SHORE LEAVE: It is regretted that both passengers and crew must be dissuaded from coming ashore other than for medical attention, owing to weather and tidal restrictions.

REPAIRS: No facilities for repairs.

LUBRICANTS: Generally, lubricants not available but in emergency certain grades sometimes obtainable in very limited quantities.

PROVISIONS: Limited fresh provisions and ex-bond stores available for which vessels should give 72 hours notice of requirements so that arrangements can be made to secure the required supplies.

REGULATIONS: The Master of every vessel of over 15 tons about to depart from a port for any place outside Sarawak shall cause the "Blue Peter" (International Code Flag "P") to be hoisted, during daylight hours, for at least 12 hours before the vessel is due to sail, or if the vessel is in port for less than 12 hours, for the period of her stay in the port.

(1) The Master or the Agent of every vessel about to depart from a port shall, on demand by the Port Officer, produce for inspection the port clearance.

(2) The Port Clearance shall be in the form of an endorsement on the form of clearance prescribed under the Customs Ordinance or in such other form as may be approved by the Director.

A vessel arriving in, leaving from or shifting berth within a port shall hoist her signal letters, if any, whilst under way.

POLICE/AMBULANCE/FIRE: Tel. 999.

AUTHORITY: Marine Officer, Marine Dept., Miri.

AGENT: Lloyd's sub-agents in Miri. The Borneo Company (M) Sdn. Bhd. Postal address PO Box No. 60, Miri, Sarawak. Tel. office: 3365, 3366, 3367; out of office hours: 3261, 3344. Telegraphic address "Borneo Miri".

The Borneo Co. (M) Sdn. Bhd. operate their own launches and a representative will board vessels as soon as possible after arrival.

PENANG, Malaya: 05.25 N. 100.21 E. (See Plan Book)

DOCUMENTS:

The report of arrival (provided in Marine Shipping Ordinance, 1952).

A copy of Passenger Statistics on prescribed forms.

A List of Crew Members.

A List of Passengers.

Evidence of last port clearance.

All Ship's Documents (safety equipment, deratisation, radio, load line and register).

Maritime Declaration of Health.

International Health Certificate for passengers and crew.

Vaccination List, for Smallpox and Cholera, for passengers and crew.

Departures: Port Clearance Certificate signed by the Port Health Officer, to be shown to the Port Officer issuing clearance.

For oil tankers, a copy of Ship's Manifest to be submitted. Ship carrying explosives, Captain required to fill prescribed form "D" stating quantity of explosive cargo ship is carrying together with copy of Ship's Manifest.

PILOTAGE: Vessel approaching port has to send telegram to Pilot Office direct (cable address "Pilots Penang") or to ship's Agent stating "ETA North Channel Light Float" or in case of South Channel "ETA Pulau Rimau". Draft of vessel to be given. Pilot Office may be contacted through Penang Telephone Exchange on VHF Channel 16 to local telephone No. 63313. At least 6 hours advance notice should be given before arrival at Pilot point.

Pilot boats have a blue hull, varnished upperworks with "Pilot" written in bold letters on both sides of boat.

Pilot is usually taken on board, for North Channel, in vicinity of North Channel Light Float and for South Channel, in vicinity of Rimau Wreck Buoy 1 mile South of Pulau Rimau Lighthouse.

Vessels awaiting tide can anchor, in case of North Channel, in area shown by pecked lines marked anchorage area in Chart No. 1366. For South Channel ship can anchor in vicinity of Rimau Wreck Buoy. During bad weather, provided draft suitable, vessels sometimes requested enter and take on Pilot at Erskine Buoy.

Pilotage is compulsory for all vessels navigating in pilot district of Penang with the exception of fishing vessels and vessels of below 600 g.r.t.

Shipmaster's Report: The KRA lightvessel, on the Outer Kra Bank to the South of the South Channel, is non-existent.

The Pilot station is now equipped with VHF but operates on Channel 12 only. The Pilot Launch is also equipped likewise, as is a car that transports the Pilots from their homes to Batu Maung Point where they board the launch. It takes them exactly 1 hour from their homes until they are aboard a vessel at Rimau Buoy, therefore a minimum 2 hour notice is adequate.

One Pilot advised me not to approach the South Channel at any time if the vessel's draft is over 24 ft. He stated that the bar to the S.W. of Rimau Buoy has not been surveyed for many years and that possible silting may leave it on a lesser depth than the chart suggests. The approach to the North Channel is safe.

ANCHORAGES: The anchorage for foreign going steamers (other than those carrying dangerous cargo or quarantine ships) is Southward of the S.W. corner of the Man of War Anchorage (shown on Admiralty chart by pecked lines) and Eastward of a line drawn from this point to the Northern white mark buoy and thence 180°. Vessels must moor so as to swing clear of these lines at all states of tide.

The anchorage for coasting power vessels is Southward of a line drawn 270° from the Northern white mark buoy and Westward of a line drawn 180° from this buoy. Vessels must swing clear of these lines at all states of the tide.

RESTRICTIONS: No entry restrictions imposed other than those dictated by state of tide and draft of vessel.

MAX. SIZE: No limitations of size of vessel except for draft. North Channel chart datum 26 ft. South Channel chart datum 21 ft. Vessels of up to 32 ft. can use port but must wait for high water.

RADIO: Penang Radio, call sign 9–MG.

VHF: Vessels can communicate direct to Pilot Office via VHF operated on Channel 12 VHF within a range of 15 miles. A separate VHF network links the tugs, launches and the Commission's personnel working on board vessels in the roads.

TUGS: May be required to berth vessel at Butterworth Wharves in Port Penang. Tug joins vessel when at close proximity to wharves. Usual for tug's lines to be used.

2 tugs available, 1,320 b.h.p. and 1,200 b.h.p. Also 1 small tug of 440 b.h.p. and 1 tow-boat of 174 b.h.p. available to tow lighters to and from vessels.

BERTHING: There are 2 wharves, viz. Swettenham Pier on the island of Penang and Butterworth Wharves on the Mainland.

Swettenham Pier: 2 ocean berths of 360 m. length with 10 m. of water alongside. There is 168 sq. ft. of covered storage accommodation.

Butterworth Wharves; 6 ocean berths of 1,046 m. length with 10 m. of water alongside. There are 5 transit sheds of 148,000 sq. ft., 7 storage godowns of 261,000 sq. ft. an open sided timber shed of 90,000 sq. ft. and 140,000 sq. ft. of open storage area. 9 godowns of 384,000 sq. ft. near the port area are leased to private companies. Berth No. 6 is a container berth with Roll-on/Roll-off facilities.

SPECIALISED CARGO-HANDLING FACILITIES: No special berths for handling bulk cargo. 2 of the berths at Butterworth Wharves are designed to handle containerised cargo when such facilities are required. At Swettenham Pier and Butterworth Wharves there are vegetable oil bulking installations. Pipe-lines are connected from the installations to the wharves.

CONTAINER HANDLING FACILITIES: The port is equipped with modern container handling facilities to handle both 6 m. and 12 m. containers. These container facilities are available at the Butterworth Wharves and they include a 6.7 hectare marshalling yard with storage space for 2,400 containers, a container freight station of 3,900 square metres, 2 units of straddle carriers for handling both 6 m. and 12 m. containers, 20 power points for refrigerated containers and prime movers with 6 m. and 12 m. trailers. To assist in the working of vessels which do not have lifting facilities, there is also a mobile boom crane with the capacity to lift 6 m. containers at 24 m. radius and capable of plumbing the hatch of vessels.

Additional container handling equipment which will be available by the end of 1978 includes a container gantry crane, 2 transtainers, 2 heavy duty 25 tons capacity forklift trucks, 14 prime movers with 8 units 12 m. trailers and 11 units 6 m. trailers and 6 units short-mast forklift trucks for container freight station operations.

Haulage of containers inland and between the Island and Butterworth Wharves is catered for by Kontena Nasional, a private haulage company.

CARGO HANDLING EQUIPMENT: At Butterworth Wharves one mobile crane of 30 tons capacity, 14 mobile cranes of 2-to 3-ton capacity, 62 fork-lift trucks of 6,000 lb. capacity, 3 fork-lift trucks of 13,000 lb. capacity and 28 LPG fork-lift trucks for hatch work. At Swettenham Pier 1 mobile crane of 10-ton capacity, 2 electric cranes of 3-ton capacity, 8 fixed and mobile cranes and 25 fork-lift trucks. Scores of tractors and trailers make up the rest of the mechanised cargo-handling equipment of the Commission.

LIGHTERAGE: In the event of a vessel working in the Roads, lighterage is available for the transport of goods to and from the vessel. There are about 229 lighters operated by private companies and twenty 150-ton lighters by the Commission for lightering of cargo in the Port. In the case of the Commission's lighters, lighterage is only undertaken for import cargo.

STEVEDORES: Stevedores can only be provided by stevedore contractors at short notices but normally a min. of 12 hours will be required. Shipping Agents normally make these arrangements with stevedoring contractors.

MEDICAL: Advance notice is necessary if medical attention is required so that arrangements can be made with Medical Department by Agents.

TANKERS: 2 tanker berths. Esso Wharf, 27 ft. at low water. Caltex Wharf, 35 ft. at low water. Mud bar approach to Caltex Wharf is 29 ft. at low water. Tankers also occasionally call at Swettenham Pier to deliver oil to City Council Power Station.

FRESH WATER: Available at all times. Delivery can be by means of hydrants at berths or by water-boats to vessels anchored in Roads. Rate of delivery is approximately 40 t.p.h.

FUEL: Fuel available from private oil companies at 24 hours notice. Limited quantities of fuel can be supplied by barges to vessels in the Roads.

GANGWAY/DECK WATCHMEN: Services of a watchman recommended.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

IDENTIFICATION CARDS: Needed only when a crew member is discharged after hospitalisation or when he is repatriated.

REPAIRS: Minor repairs can be undertaken.

DRY DOCKS: Dry docks not available for ocean carriers. Slipways available for vessels of 700 nrt with dimensions of 190 ft. × 40 ft.

REPATRIATION: Facilities exist for effecting crew changes and arranging necessary repatriation.

AIRPORT: Distance from port to airport approximately 11 miles. Served by both international and local airlines.

TIME: 7.5 hrs. ahead of GMT. No alteration to clocks during year.

HOLIDAYS: 3 port holidays a year: Hari Raya Puasa, Hari Raya Haji and National Day.

POLICE/AMBULANCE/FIRE: Dial 999.

TELEPHONES: A telephone is placed on every ship that berths alongside. This is one of services provided under a common charge known as the wharf service charge.

SERVICES: All types of minor marine servicing is available. Provided by private firms. Some of the services are draft survey, general conditioning of ship, valuation of ship, accident survey, inspection of refrigeration, radar adjusting service, compass adjusting and tank-cleaning facilities.

SHORE LEAVE: Allowed.

REGULATIONS: Free port, and as such, when a vessel calls at port, Customs search party may go on board vessel to search for contraband goods.

DEVELOPMENTS: The Penang Port Commission is undertaking several expansion projects to meet the anticipated growth of cargo traffic in the port and to provide specialised cargo handling facilities. They include:

(i) A Bulk Cargo Terminal at Prai to provide an efficient and modern dry and wet bulk cargo handling facility. Shore facilities for storage of both wet and dry bulk cargo together with a deep water wharf for vessels to directly load and discharge cargo will also be made available. The wharf frontage will have a draft of 10 m. and will be connected to shore facilities by conveyor belts, pipes and a 1,220 m. long jetty. This terminal is expected to be ready by mid-1979.

(ii) A vegetable oil tanker pier of open dolphin supported structure will be constructed Southwards from berth No. 1 Butterworth Wharves into the Prai River estuary, to provide a specialised facility to handle the increasing volume of bulk vegetable oil exports. Construction of the pier will begin in late 1978 and will be operational by late 1979.

(iii) An engineering study into the feasibility of deepening the North Channel is now underway. The project partly financed by the U.S. AID is looking into the feasibility of deepening the North Channel which is presently too shallow to permit bulk carriers and container vessels with drafts in excess of 32 ft. to enter the port.

The Consultants after completing Phase I of the study have concluded that the Channel can be effectively dredged to a depth of between 30 and 40 ft. A.C.D. The Consultants are now proceeding with Phase II of the study which involves trial cut experiments and the addition of a Hydraulic Model Test.

(iv) The Commission will be appointing Consultants in late 1978 to conduct a feasibility study towards locating a new port site for the Port of Penang. This is in response to the fact that the demand for facilities in the port will increase rapidly in the future and the existing capacity and the available capacity from the planned port projects to be implemented in the short term will be insufficient to meet the demand beyond 1981/82, especially in the case of general and unitised cargo. Under the new proposed site, provision will be made to accommodate the port's estimated requirements for the next 50 years.

DELAYS: Rain is only factor that may delay a ship's discharging or loading operations.

AUTHORITY: The Penang Port Commission.

PORT DICKSON, Malaya: 02.31 N. 101.47 E.

DOCUMENTS:

1. *Harbour Master's Office or Marine Department*
   - (a) "Report of Arrival of Vessel" on prescribed Form (Marine 28) obtainable from Harbour Master's Office on arrival.
   - (b) One copy, Passenger List, specifying names and nationalities and required to report any casualties, accidents, births or deaths that have occurred during the voyage to the passengers, crew, ship or cargo.
   - (c) Port Clearance from last port and copy of Manifest of Cargo to be discharged.
   - (d) List of all arms and explosives on board.
   - (e) In the case of a British or Malaysian vessel and vessels belonging to a nation not having a Consular Officer at the port, produce to Port Officer the Certificate of Registry and ship's Articles.
   - (f) All ship's certificates such as Safety Equipment Certificate, Radio Certificate, Load-line Certificate, Safety Construction Certificate, Ship's Registry, Passengers' Certificate, Derating Certificate and all Certificates of Competency of all Officers on board.
   - (g) Crew List.
2. *Immigration Authorities*
   - (a) Crew List (3 copies).
   - (b) Passenger List (3 copies).
   - (c) Produce all passengers passports/visas.
   - (d) Produce all seamen's cards.
   - (e) Forms A and B – "Immigrant and Emigrant" obtainable from Immigration Department on arrival.
3. *Port Health*
   - (a) Crew List showing last date of vaccination.
   - (b) Passenger List showing the last date of vaccination.
   - (c) Produce all seamen and passengers' vaccination cards.
4. *Customs Department*
   - (a) Crew List (2 copies).
   - (b) Passenger List (2 copies).
   - (c) Personnel Effects List (2 copies).
   - (d) Cargo Manifests (2 copies).
   - (e) Last Port Clearance.
   - (f) Bonded Stores List (2 copies).
   - (g) Full and correct statement of dutiable goods carried as ship's stores (2 copies).
   - (h) Customs Form C.D.15 obtainable from Customs Department on arrival.

APPROACHES: Deep water approach channel from N.W., marked by four light buoys, presents no difficulties and is clear.

PILOTAGE: The Port Dickson area does not constitute a Compulsory Pilotage District under provisions of Merchant Shipping Ordinance, 1952. Private pilotage services are, however, operated by Shell and Esso for vessels making use of their respective marine installations. Mooring Master boards tankers at Banbeck Shoal Buoy.

Ship's Officer's Report: Pilot boards one mile off Fairway Buoy. However, vessels of less than 30,000 d.w.t. holding Admiralty Chart No. 1140 may be requested to proceed inwards, Pilot boarding at No. 1 Buoy. Coasters proceeding to Headlands Jetties may be required to do own pilotage.

ANCHORAGES: *(a)* Good anchorage may be obtained in depths from 15 to 20 fathoms, Westward and South-Westward of Tanjong Kamunin. Small vessels may obtain anchorage in depths from 4 to 5 fathoms North-Eastward of Pulau Arang Arang, but holding ground is poor.

(b) Prohibited Anchorage Area indicated by pecked lines on chart and described under Port (Negeri Sembilan) (Amendment) Rules, 1963. This area contains a tanker SBM, with extensive ground tackle and floating hose attachments, which is connected to the shore by a submarine pipe-line. Passage between the buoy and the shore is also prohibited.

RADIO: *Ship's Officer's Report:* Send ETA 96 hours and 24 hours in advance. Two hours before arrival keep listening watch on Channel 16. Shell Oil Terminal on VHF Channel 16 and 9. Cargo operations are carried out on Channel 9.

TUGS: No tug-boats available.

MAX. SIZE: Up to 47 ft. draft at S.B.M. terminal.

BERTHING: Port installations at Port Dickson comprise the following:

A small boat harbour contained in the curve of the stone approach to the Railway Jetty which affords little shelter against Southerly winds dries out at low water.

The Shell Jetty – property of the Shell Refining Co. (Malaysia) Ltd. (Private). Reinforced concrete jetty 700 ft. with "T" head 170 ft.×36 ft.

The Esso Jetty – property of the Esso Standard Malaya Ltd. (Private). Reinforced concrete island jetty 200 ft.×24 ft.

The Railway Jetty – property of the Malayan Railway Administration. Stone pier 600 ft. length terminating in a crosshead 150 ft. long with steel piling and wooden deck.

The Joint Shell/Esso single-buoy Tanker Mooring and Crude Oil Discharging Terminal.

Stone ramp on foreshore usable by lighters at high water.

MEDICAL: District hospital with 150 beds.

TANKERS: Shell/Esso Single Buoy Mooring for crude discharge into submarine pipe-line. Refineries produce petroleum products for export. Deballasting facilities up to 35,000 barrels capacity.

Esso Product Jetty: Berth is constructed of reinforced concrete. The island jetty is 200 ft.×24 ft. with 4 off-lying mooring buoys inshore for mooring purposes. Accommodation for one vessel on outer face only.

Max. LOA 575 ft.; max. draft 34 ft.; max. size 19,500 d.w.t.

Shore connections:
1×20 in. black oil/ballasting
1×16 in. white oil line
1×10 in. LPG line
1× 4 in. inert gas line
1 crane to handle hose

FRESH WATER: Available at Shell and Railway jetties.

FUEL: Bunker fuel-oil available. No diesel.

DEVELOPMENTS: Proposal to enlarge facilities and to provide deep-water berths.

CUSTOMS ALLOWANCES: Tobacco, cigarettes 25 in number per man per day, or cigars 8 in number per man per day, or tobacco 1 oz. per man per day, or snuff 1 oz. per man per day. Wine and/or spirits, spirit .175 qt. per man per day, or wines 1 qt. per man per day, or beer or stout 1 qt. per man per day.

REPAIRS/DRY DOCKS: None.

HOLIDAYS: Official holidays in the state as follows: New Year's Day, 1 day; Chinese New Year's Day, 2 days; Muslim New Year's Day, 2 days; Wesak's Day, 1 day; His Majesty's Birthday, 1 day; Prophet Mohammed's Birthday, 1 day; His Excellency Governor's Birthday, 1 day; Malaysia Day, 1 day; Deepavali, 1 day; Hari Raya Huji, 2 days; Christmas Day, 1 day. No cargo is worked on any of the above gazetted public holidays – port closed.

AIRPORT: None.

AUTHORITY: See "Malacca".

PORT KELANG, Malaya: 03.00 N. 101.24 E.

(See Plan Book)

PORT LIMITS: All the waters in the Klang Straits, the Klang River, Sungei Aur, Selat Lumut, Sungei Langat and other waterways contained within the parallels 2° 58′ N. and 3° 05′ N. and the meridians 101° 20′ E. and that passing through Connaught Bridge i.e. 101° 28′ 30″ E. approximately including all piers, jetties, landing places, wharves, quays, docks and other similar works whether within or without the line of high water mark, any position on the shore or bank within 50 yards of high water mark subject to any rights of private property therein.

APPROACHES: Ships from and to Penang enter and leave the port by the North Klang Straits, and ships from and to Singapore enter and leave by the South Klang Straits. The entrance channel at the North Klang Straits is dredged to 36 ft. below datum. A very large deep water anchorage for ships is available at the North Klang Straits. For ships entering the Old Port, the permissible draft is 28 ft. and 22 ft. plus the height of tide through the North Klang Straits and South Klang Straits respectively.

DOCUMENTS: *(a) For Agent.* Vessels required to fill in arrival report which may be obtained from Agent at Singapore or Penang or Boarding Agent on arrival. This should be completed and handed to Boarding Agent together with last Port Clearance and one copy each of Crew List and Passenger Lists for submission to Marine Department.

Vessels should have ready and hand to Boarding Agent on arrival the following:
Arrival Report.
Last Port Clearance.
Two copies of Crew List.
Two copies each of Disembarking and Transit Passenger Lists (if any).
List of Explosives, dangerous cargo on board.

Following documents should also be handed to Boarding Agent on arrival and will be returned to vessel after perusal by Marine Department:
Malaysian Light Dues Receipt (if any).
Ship's Register.
Radio Safety Certificate.
Safety Equipment Certificate.
Load Line Certificate.
Deratisation Certificate.

Port Health Officer now requires all vessels arriving from foreign ports to submit an "Entry Declaration" on form Health 43, on the International "Maritime Declaration of Health" form or on a similar copy, and this should be handed to Boarding Agent, together with copy of crew list, in cases where vessels are not in Quarantine, in which case doctor does not attend on board.

Note: Endorsement of Port Clearance must be obtained from Port Office at Marine Office before a fresh Port Clearance can be issued by local Customs Authorities and handed to vessel before sailing.

(b) Immigration
2 copies Crew List.
2 copies Passenger List (Disembarking and Transit).
(c) Customs
2 copies Customs List (CD.15).
1 Crew List.
1 Passenger List.

FLAGS: The Malaysian Flag. Flag "Q" meaning Health Clearance required. *Flag 2/5 meaning No passengers on board, or *Flag 3/4 meaning Passengers on board. Pennant Zero is not required since Boarding Officers do not board the ship on arrival. Flag H meaning Pilot on board. (*Applies only to vessels arriving from foreign ports, which now includes Singapore.)

Note: Except for vessels under way, no vessel in port may use its siren except in case of an emergency when no other means of communication is available. The Authorities strictly enforce this rule and vessels infringing it become liable to heavy fine.

PILOTAGE: Available 24 hours a day. Pilotage compulsory.

(a) Application. Piloting carried out by Kelang Port Authority. Masters to cable "Pilots Port Kelang" giving ETA and point of arrival, i.e. Pintu Gedong or Pulau Angsa and draft at least 4 hours before arrival, as Pilots will not leave shore until confirmation received from vessel. Both North and South Channels are well marked and Pilots consider it quite safe to arrive and depart at any hour.

Vessels approaching this port normally apply through Agent, giving ETA Pintu Gedong, Pulau Angsa or Deep Water Point, together with draft and port of departure.

(b) VHF. If vessels wish to communicate direct all pilot boats are fitted with VHF for use between pilot office, pilot boats, pilot boat to pilot boat and where necessary to vessels arriving at this port. Operated on Channel 12 of International Maritime VHF radio telephone bands, and of a range of 20–25 miles.

(c) Recognition. Pilot boats painted orange and have white superstructure.

(d) Boarding. Unless advised otherwise Pilots will be ordered to board vessels at Pulau Angsa (North Channel), or Pintu Gedong South of the Seaward Bar Buoy.

Pilot ladders should be of approved Standard pattern internationally used.

(e) Waiting for Pilot. Location for a vessel awaiting Pilot is at Pintu Gedong 5 cables South of Seaward Bar Buoy, at Pulau Angsa 1 mile East of Pulau Angsa Island, and at Deep Water Point where anchorage is available according to number of vessels already anchored.

ANCHORAGES: Per latest Admiralty charts. Vessels may load timber and ore from privately owned junks at Deep Water Point Anchorage. In exceptional cases and with permission of Port Authority it is also possible to work with Authority Lighters at Deep Water Point.

RESTRICTIONS: (See "Max. Size"). Pintu Gedong, the Southern Channel Pilot Station, there is a restriction, of which vessels will be advised when giving their ETA.

MAX. SIZE: Max. length of vessels using South Port (old port) is: dry cargo vessels, 565 ft. LOA with draft of 32 ft., tankers, up to 560 ft. LOA and draft 32 ft. Tidal conditions govern movements of all vessels over 500 ft. LOA in the South Port but not at the North Port (new port). Vessels of up to 621 ft. can be berthed under any conditions at the North Port but only under special tidal conditions at the South Port.

At the North Extension Wharves, container ships of 950 ft. can be berthed.

HEALTH: Port Health Officer will board vessels arriving from infected ports, or carrying deck passengers at Deep Water Point between 0700 and 1800 hrs. All ships arriving from foreign ports should ensure that all on board hold valid smallpox vaccination documents.

All vessels should include in arrival cables confirmation that all well on board and also that all health papers in order. It should be understood that the health papers referred to include deratisation, or deratisation exemption Certificate.

RADIO: ETA cables normally routed via Singapore or Penang as no radio station in Port Kelang. Such messages when received are transmitted by telephone to Agents/and or Pilots at Port Kelang.

VHF: (See "Pilotage"). Ship to shore telephones available at all berths at North Klang Straits, and VHF sets available for ships in moorings. Klang Exchange keeps a 24-hour watch on Channel 16 and will connect the vessel to any telephone receiver ashore. For local calls the cost is $1.92 for three minutes (approx.).

TUGS: Supplied by Port Authority and normally "stand by" vessels berthing at wharves as and when required. Tugs towing use ship's lines, tugs pushing use their own lines. 5 tugs available to assist in berthing and unberthing and are equipped with fire-fighting appliances and radio communications system. When vessels berth or unberth at wharf tugs ordered by Agent in consultation with Pilots and once in attendance are charged for whether used or not. Tugs also used to swing vessels in stream which are stemming ebb tide on departure. In addition 3 smaller tugs used to tow lighters to and from vessels.

BERTHING: There are 2 ports viz: the South Port or Old Port and the North Port. Vessels berthing in the South Port (Old Port) are governed by tidal conditions which vary considerably. Vessels over 525 ft. LOA are usually berthed port side to on the ebb and then only when tides are favourable. There is usually no objection to vessels unberthing from the wharf at night although generally speaking vessels will not be berthed at night. As a general rule discharging vessels will berth at North Port (North Klang Straits) and loading vessels in the stream in the South Port (Old Port).

(a) South Port. 3 ocean wharves of 2,190 ft. length with 30 ft. of water alongside, 2 coastal shipping wharves of 650 ft. with 20 ft. of water alongside, 5 swinging buoys, and 2 anchorages. 3 to 4 vessels of not more than 250 ft. in length and with drafts of up to 18 ft. can be accommodated at North Shore anchorage.

(b) North Port (North Klang Straits) Wharves. 4 ocean wharves with total length 2,490 ft. Each berth 580 ft. long, with 202 ft. Concrete wharves with a safe working load of 4 cwt. per square foot and a maximum point load of 10 tons. Draft alongside all 4 wharves 30 ft. Rail track on wharf apron. In addition 4 container wharves, each 1,050 ft. long and 1 conventional cargo wharf 700 ft. long have been built and are now in operation. The wharf aprons are 260 ft. wide. Depth of water alongside is 45 ft. There are 4 container cranes on the container wharves. If there are no container ships in port, these wharves will be used by conventional vessels.

Depth of water alongside is 45 ft. Container stacking yard is 28 acres. Freight station measures 600 ft.×120 ft.

Container Handling Equipment: 2 container cranes of 35 tons capacity each (which can handle 800 containers a day).

16 straddle carriers of 30 tons capacity each.

20 prime movers.

12 × 20 ft. and 10 × 40 ft trailers.

53 forklifts.

2 tugs of 2,700 h.p. each.

(c) General.

Facility		*Depth Below New A.D.C.* (ft.)
North Klang Straits Approach		36
Pintu Gedong Bar		22
Labohan Garap Bar		25
No. 1 Wharf	580 ft. length	35
No. 2 Wharf	580 ft. length	35
No. 3 Wharf	550 ft. length	30
No. 4 Wharf	480 ft. length	20
No. 5 Wharf	350 ft. length	20
No. 6 Wharf	400 ft. length	20
No. 7 Wharf	570 ft. length	10–15
No. 8 Wharf	700 ft. length	35
No. 9 Wharf	1,050 ft. length	45
No. 10 Wharf	1,050 ft. length	45
No. 11 Wharf	580 ft. length	30
No. 12 Wharf	580 ft. length	30
No. 13 Wharf	580 ft. length	30
No. 14 Wharf	580 ft. length	30
No. 15 Wharf	550 ft. length	30
No. 16 Wharf	700 ft. length	38
No. 17 Wharf	700 ft. length	38
No. 18 Wharf	700 ft. length	38
No. 24 Wharf	700 ft. length	36
No. 25 Wharf	700 ft. length	36
No. 1 Buoy	on 600 ft. swing	23
	on 500 ft. swing	30
No. 2 Buoy	on 600 ft. swing	23
	on 500 ft. swing	29
No. 3 Buoy	on 600 ft. swing	17
	on 500 ft. swing	26
No. 4 Buoy	on 600 ft. swing	20
	on 500 ft. swing	25
No. 5 Buoy	on 600 ft. swing	24
	on 500 ft. swing	24
No. 6 Mark	on 600 ft. swing	30
	on 500 ft. swing	30
No. 7 Mark	on 600 ft. swing	30
	on 500 ft. swing	40

Distance between buoys is as follows:

Distance between No. 1 buoy and No. 2 buoy 1,200 ft.
Distance between No. 2 buoy and No. 3 buoy 1,200 ft.
Distance between No. 3 buoy and No. 4 buoy 1,200 ft.
Distance between No. 4 buoy and No. 5 buoy 1,300 ft.

The above distances allow for slackness in pendants at low water. The depths listed combined with tidal predictions for current year give actual depth of water.

STEVEDORES: Almost all timber loaded from private junks for which no lighter gangs needed. Average working rate, subject to stow, for timber in loose pieces is 4–6 t.p.h., and in bundles 6–8 t.p.h. Not more than 2 lighters or "tongkangs" may lie alongside any vessel abreast of each other and not more than 2 lighters shall be moored astern of a vessel.

Rubber, latex in drums, etc., loaded by Port Authority and lighter/wharf gangs are required. Average working rate for these commodities is 14 t.p.h.

The average rate of discharge at North Port (North Klang Straits) wharves is 14–16 t.p.h.

On-board stevedores provided by the Port Authority. Requirements for the 1st shift should be made known by 1300 hrs. the previous day and for 2nd shift by 1000 hrs. same day and the 3rd shift not later than 1130 hrs. the same day.

Working hours throughout the port: 1st shift 0700 to 1500 hrs. (meal break 1100–1200 hrs.). 2nd shift 1500 to 2300 hrs. (meal break 1900–2000 hrs.). 3rd shift 2300 to 0700 hrs. (meal break 0300–0440 hrs.).

MEDICAL: A number of private doctors in Port Kelang and it is often not necessary to give any advance notice of medical attention being required. In event of vessel requiring urgent medical attention on arrival, advisable for Master to cable Agent in advance. At present 2nd class medical facilities available in Kelang and 1st class facilities only available in Kuala Lumpur. As vessels arriving at Port Kelang normally do so after calling at Penang or Singapore no inoculation, vaccination or fever certificates are required unless either Singapore or Penang is declared an infected port.

TANKERS: Tankers always berth port side to on ebb and near slack water. Vessels with bulk liquid cargoes to load or discharge will berth at wharves 1, 2, or 3. When a number of pumping vessels in port, vessels will usually occupy these wharves only for the time it takes to complete pumping and may then have to shift to stream or another wharf. Three of the ocean wharves are provided with facilities for handling liquid cargo. Liquid cargoes now being handled are: latex, palm, coconut oil, petroleum products, alkane, tallow and fuel oil.

Shell Company has a private jetty on which vessels up to 320 ft. in length with drafts not exceeding 20 ft. can be berthed.

DENSITY: Varies considerably with state of tide and heavy monsoon rains.

FRESH WATER: Waterboat, capacity 200 tons, available to supply vessels in South Port (Old Port) and at Deep Water Point with fresh water. As much notice as possible should be given if waterboat required. At North Port (North Klang Straits) water available from wharf. Pumping rate about 20–25 t.p.h.

FUEL: Bunkers are available.

FIRE PRECAUTIONS: In respect of tankers loading or discharging inflammable cargo, necessary to have wharf cordoned off and "No Smoking" signs exhibited prominently. Port Fire Brigade required to be on stand-by at wharf whilst operation in progress. Vessel may not disable engines whilst alongside wharf and shall have axes ready in event has to leave wharf urgently and necessary to cut ship's lines. Port Fire Service on duty 24 hours a day throughout year. Service is capable of fighting all types of fire whether on land or on sea. Fire service has following equipment: 3 fire engines, 1 Land Rover fire engine, 2 trailer pumps, 3 fire fighting tugs.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CUSTOMS/IMMIGRATION: Customs Officer will board vessel soon after arrival to seal the "Bonded stores". For vessels staying in port some time it is usual to issue three days supply – a further issue may be made on request after three days.

Immigration Officer will clear vessels arriving from foreign ports on all days between 0700 and 2100 hours. No one may board or leave or approach within one cable length of such vessel without special permission until vessel has been cleared by Immigration Officer and Immigration Signal is hauled down. No Immigration formalities required for vessels arriving from or leaving for other West Malaysian ports (Malacca and Penang).

IDENTIFICATION CARDS: Advisable that members of crew carry identification cards when leaving ship.

CONSULS: Consulates/Embassies/High Commissions in Kuala Lumpur (28 miles from Port Kelang).

Embassy of the United States of America.
Australian High Commissioner's Office.
Belgian Embassy
Consulate of Brazil
British High Commission
Burmese Embassy
Canadian High Commission
Consulate of the Republic of China
Royal Danish Embassy
Consulate of Finland
Embassy of France
West German Embassy
Indian High Commission
Embassy of the Republic of Italy
Embassy of Japan
Embassy of the Republic of Korea
Royal Embassy of Netherlands
New Zealand High Commission
Consulate of Norway (at Penang only)
Consulate of Panama (at Penang only)
Pakistan High Commission
Embassy of Philippines
Singapore High Commission
Royal Swedish Embassy

REPAIRS: Slipping facilities for repair of lighters and smaller tugs available. No facilities for major repairs to ships.

DRY DOCKS: None.

REPATRIATION: Crew changes and repatriation must be arranged by Agent. Harbour Master attends signing-on and signing-off of the crews on ship's articles.

AIRPORT: Subang International Airport approximately 20 miles from port on main trunk route to Malaysian capital of Kuala Lumpur and served by regular domestic flights and international flights.

HOLIDAYS: Port Closing Days. *Hari Raya Puasa; *Chinese New Year; Malaysia Day (31st August); *Deepavali; Christmas Day (25th December). *Dates subject to changes as festivals coincide with Mohammedan, Chinese and Hindu calendars.

TELEPHONES: At North Port (North Klang Straits) Wharves telephones installed on board if required. At wharves in South Port (Old Port) there is always a telephone within easy reach at Wharf Office.

GENERAL: *(a)* Ship-Shore Communication. When vessels are berthed in stream or at Deep Water Point a 24 hour launch service can be supplied. Arranged by Agent in consultation with Master to suit requirements of ship.

Vessels permitted use own boats with proper navigation lights at night.

(b) Seamen's Club. "Mariner's Club" for officers and seamen outside No. 3 Gate of South Port. Club has swimming pool and bar.

(c) Diving. Diving services available for salvaging lost cargoes, examining underside of ships, etc. Divers capable of deep-sea diving down to 120 ft.

DEVELOPMENTS: Construction of 3,500 ft. of wharves expected to be ready by 1980.

AUTHORITY: Kelang Port Authority.

ROMPIN (Kuala Rompin): inc. Pahang, Malaya: 02.43 N. 102.30 E.

DOCUMENTS:

Register.
Last Port Clearance.
7 copies Crew List and 4 for Agent.
5 copies Passenger List (if any).
5 copies Stowaway List (if any).
2 copies Stores List (including firearms and ammunition).
2 copies Dutiable Liquor and Tobacco List.
2 copies Crews Declaration List (cameras, radios, etc.).
1 copy Vaccination List.

Masters of vessels to fly the necessary following flags on arrival as required under Section 448 of the Merchant Shipping Ordinance and Sub-Section (9) of the Federation Port Rules, 1953.

(1) The Federation of Malaysia Flag.
(2) The Pennant "O" Flag (Request Port Officer).
(3) The "Q" Flag (request Port Health Officer).
(4) The Pennant "2"; "5" Flags if no passengers and "3"; "4" Flags if there are passengers on board (Immigration).

PILOTAGE: Compulsory to the loading berths. Extra charge for pilotage outside normal office hours and holidays.

ANCHORAGE: On arrival, vessels required to anchor about 1 mile outside berthed ships to obtain pratique. An accommodation ladder must be rigged on lee side to allow Port Authorities to board.

READINESS: Notice of readiness cannot be accepted until vessel is in free pratique, Customs Inward Examination completed, and in all respects ready to load.

LOADING. *(a)* Ladders. Masters particularly advised to see that a sound and adequate ladder provided at each lighter to allow labourers engaged in loading to pass to and from ship with no undue risk. Regulations are provided in the Merchant Shipping Ordinance, Section 445, Sub-Section (O) which takes care of this requirement and failure to take adequate precaution in seeing regulation is observed may result in serious consequence to those responsible.

Masters requested to ensure that in addition to ladders for labourers, an extra ladder, preferably a clean pilot ladder, be made available at all times for the Agent for boarding. This ladder should be made fast on lee side, just forward of any scuppers in vicinity, and a heaving line from ship's rail made fast to bottom rung. When ladder not in use, bottom of ladder can be pulled up a few feet with heaving line to prevent labourers from using it or damage from lighters.

(b) Winches. All winches must be in single gear at all times.

(c) Derricks. Practice to work 2 sets of derricks to 1 lighter where practicable.

(d) Trimming. No manual trimming undertaken.

(e) Damages. In the event of your vessel sustaining damage by stevedores during loading, you are requested to inform the clerk and foreman on board immediately and as soon as practicable confirm same in writing to the Eastern Stevedoring Co. Ltd., Kuala Rompin, with copies to Hong Kong & Eastern Shipping Co. Ltd., Hong Kong, and Malay States Shipping Ltd., Kuala Rompin. It is important that full details of damage are given, together with measurements whenever possible.

Minor damage has occurred on vessels due to hatch beams not being bolted or lashed. Masters therefore requested ensure all beams adjoining working parts of hatches either bolted or lashed, otherwise stevedores will repudiate liability for any damage incurred.

OPENING/CLOSING HATCHES: Removal and replacement of hatch beams and covers must be done by ship's crew. Ship's Officers should see that any tween-deck beam removed is replaced before ore reaches that height.

CUSTOMS: Customs office hours 0830 to 1630 Monday to Friday, 0830 to 1300 hrs. Saturday.

IDENTIFICATION CARDS: Every member of crew must produce Identity Document or Shore Leave Pass at Customs House when landing and again when returning to vessel.

HOLIDAYS: New Year's Day; Hari Raya Puasa, 2nd day; Chinese New Year, 2nd day; Hari Raya Haji, 2nd day; First Day of Muharram; Vesak Day; Birthday of Sultan of Pahang; Birthday of H.M. The Yang Di-Pertuan Agong; Birthday of Prophet Muhammad; Malaysia Day; Deepavali; Christmas Day.

Note: Where a holiday falls on a Sunday, the following day will be observed as a holiday, and if such latter day is already a holiday, then the day following shall be a public holiday.

GENERAL: *(a) Scrap Iron.* Steel mills in Japan complain from time to time of finding pieces of scrap iron in the iron ore cargoes. If this scrap is not found it will cause serious damage to the plant and occasion considerable delay to production: furthermore, should scrap iron enter the machinery there is always the possibility of it endangering life, and several fatal accidents have been attributed to this cause.

The assistance of officers and crew is requested in reporting any scrap iron they see being loaded, advising shippers into which hold it went and number of the lighter it came from to enable us to take appropriate action.

(b) Whistle, Radio. Wireless Transmitters, Whistles and Sirens etc., must not be used by vessels at anchor off Kuala Rompin.

(c) Stores. Bonded stores can be obtained from Kuala Lumpur and Kuantan at prices roughly same as Singapore. Essential, view Customs formalities, that Masters give Malay States Shipping Ltd., Kuala Rompin 6 days prior notice of requirements.

SHORE LEAVE: No seaman may proceed more than 3 miles from Kuala Rompin Customs House. The Officer in Charge Customs, as acting Immigration Officer, has authority to limit or prohibit shore leave in all cases.

MINOR PORTS

SABAH, including Kudat, Lahad Datu and Semporna: (See Plan Book)

DOCUMENTS: 8 copies all usual documents.

PILOTAGE: Applications normally made by Shipping Agents with advance notice of 24 hours prior to actual time that Pilot services required. Pilot boats between 30-40 ft. length and equipped with VHF/AM Sets – 80.4 Mc/s. frequency. Pilot station at Port Office and location for vessel awaiting Pilot is within port limit.

ANCHORAGE: All ports within bays, therefore provide safe anchorages.

RESTRICTIONS: No restrictions for vessels entering port at night.

MAX. SIZE: All ports unlimited, cargo worked at anchor.

HEALTH: To obtain pratique, arrange with Shipping Agent. Pratique for vessel entering, after calling at another port in same state, is not required. Anchor in quarantine anchorage if vessel is suspect and display following signals: *By Day:* International Code Signal "QQ". *By Night:* A Red light over a White light and a separate hoist of Red light over a Green light. Hoisted vertically 6 ft. apart where best seen.

RADIO: Singapore Radio recommended.

BERTHING: Application for berthing has to be made within 24 hours prior to actual time that berthing is required. *Details and Requirements:* Name of vessel, gross and net tonnage, length overall, draft (fore and aft), ETA at berth, ETD from berth, nature and tonnage of cargo to be discharged/loaded. No priority for berthing ships and the turn is, first come first served.

Kudat: L-shaped wharf with 2 berths. Western berth – length 370 ft. min. depth 21 ft. Eastern berth – length 300 ft, min. depth 21 ft.

Lahad Datu: L-shaped wharf with 2 berths. Outer berth, length 200 ft. min. depth 32 ft. Inner berth, length 130 ft. min. depth 30 ft.

Semporna: T-shaped wooden wharf with 2 berths. Outer berth, length 150 ft. min. depth 26 ft. Inner berth, length 127 ft. min. depth 20 ft.

STEVEDORES: Arrangement of stevedores should be made with 48 hours notice to Shipping Agent. Average load/discharge rate: General cargo, 15–20 tons per hatch per hour; cement 20-30 tons per hatch per hour.

MEDICAL: Arranged on arrival by Shipping Agent.

DENSITY: Average density in the ports 1020.

FRESH WATER: Available at Government General Cargo Wharves at a rate of 20 t.p.h.

DEVELOPMENTS: Lahad Datu, having new port installation and wharves facilities.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Normally by stevedores.

CERTIFICATES: Registry, Load Line, Radio, Safety Equipment and Derating Exemption.

CUSTOMS ALLOWANCE: Tobacco, Wine and/or Spirits: no control and up to discretion of Officers of Customs and Excise.

CARGO GEAR: Ships gear used.

IDENTIFICATION CARDS: Not needed.

CONSULS: At Kota Kinabalu.

REPAIRS: Marine Department operates engineering workshops at Labuan and Sandakan. Some private firms also undertake small engine and deck repairs.

DRY DOCKS: No dry docks available in the State. Marine Department has 3 slipways in Labuan which are capable of shipping vessels of 60 tons, 200 tons and 500 tons displacements. 1 in Sandakan for vessel up to 120 tons.

REPATRIATION: Normally arranged by Agents.

AIRPORT: Most airports in State between 2–5 miles from the town.

TIME: Local time is 8 hours ahead of GMT. No alteration to clocks.

HOLIDAYS: Cargo work can be arranged if necessary during official holidays, but not for Hari Raya Puasa, Chinese New Year and Christmas Day.

POLICE/AMBULANCE/FIRE:

	Fire/Police	*Hospital*
Kudat	333	335
Lahad Datu	81999	81522
Semporna	599	—

SERVICES: No services available for cleaning tanks, but compass adjusting can be arranged with officers of Marine Department, Labaun.

SHORE LEAVE: Allowed.

DELAYS: Due to weather conditions only.

AUTHORITY: Sabah Ports Authority.

SANDAKAN, Sabah: 05.50 N. 118.07 E.

(See Plan Book)

FLAGS: Signal letters, Mail flag (if any mail on board for discharge); "Q" flag is essential if Sandakan is the first Sabah port at which a vessel calls. If ship carrying passengers it should fly immigration signals Nos. 3 and 4; if no passengers Nos. 2 and 5.

DOCUMENTS: 5 sets of Inward Manifest in the prescribed form to be airmailed to Agent to arrive at least 48 hours before the vessel.

(a) To be Produced on Arrival:

1 Sabah Lights and Harbour Dues form
2 Manifest in the prescribed form
3 Crew List
1 Last Port Clearance
3 Stores List
3 Passenger List
3 Arms List
3 Narcotics List
2 Parcels List

(b) Required by Agent:

2 sets of Inward Manifests for all inward cargo
5 sets of Transhipment Manifests for all cargo to be transhipped at Sandakan.
2 copies of Hatch List.
1 copy of Passenger List.
1 copy of Crew List.
1 copy of List of Arms and Ammunition.
1 copy Narcotics List.
1 copy Stores List.

(c) To be Supplied to Ship before Departure:

Manifests, as required by vessels.
Captain's copy of B's/Lading.
Port Clearance and Customs Clearance.
Sabah Lights and Harbour Dues form.

(d) Immigration: Immigration Officer will board vessel on arrival and clear her inwards. No restrictions on crew and/or passengers going ashore. Immigration require 2 copies of crew list and 2 copies of passenger list. Vessels cleared inward until 1800 hrs. only. If there are special circumstances arrangements can be made to clear vessels inward after this time.

(e) Marine Department: Shipping Arrival Report to be signed by Master of Vessel.

PILOTAGE: Pilotage not compulsory but if required the Harbour Master acts as Pilot. At least 24 hrs. notice should be given and position where Pilot is required to embark (i.e. the bar buoy or within harbour limits) should be included in the message. Pilot station tel. 3128.

ANCHORAGES: For loading timber: A black and white conical buoy situated 1.2 miles S.W. from Government Wharf indicates the anchorage. It is important that vessels should anchor as close to this buoy as possible, when anchored further from shore it may take up to an hour longer for launches towing rafts of timber to reach ship and in addition there is less shelter from wind and weather and consequently raftsmen have to cease work earlier.

For discharging: Unless it is intended to come alongside the wharf, vessels discharging should anchor 4 cables due South of wharf. Wharf is 750 ft. long with dolphins placed 100 ft. from each end giving a total length of 950 ft. If discharging into lighters and loading log timber simultaneously vessels should proceed to Timber Anchorage.

RESTRICTIONS: *(a)* Shifting: Vessels may not berth alongside after dark without special permission but they may leave the wharf, having given prior notice.

(b) Special Cargo Regulations: No vessel with dangerous cargo may be alongside after sunset, except at discretion of Harbour Master. No dangerous cargo may be discharged simultaneously with general cargo except with permission of Harbour Master. Livestock: subject to approval of Veterinary Authority. Certain animals, including cattle, are prohibited imports and exports except under licence.

MAX. SIZE: Draft restriction is 25 ft. on the Bar plus the height of tide, mean high water being about 6 ft.

HEALTH: (Also see "Radio" and "Regulations"). If Sandakan is first port of entry into Sabah a vessel must proceed to quarantine anchorage until cleared by Health and Immigration Officials.

The Sabah Government are signatories to the WHO convention on quarantine regulations. If vessel comes from outside State of Sabah then Port Health Authority will require to board in quarantine anchorage before vessel can proceed to wharf or timber anchorage. If, however, vessel is not coming from an infected port pratique may be granted providing vessel cables Agent prior arrival advising last port of call and whether vessel healthy. Pratique normally cabled to ship but if unreceived, vessel must proceed to quarantine anchorage.

Port Health Authority require completed copy of Maritime Declaration of Health, and copies of Crew, Passenger and Narcotics Lists.

RADIO: (Information required before ship's arrival). ETA, number of passengers, health situation, Manifest, amount of water required. Vessels not allowed to use their radio in port.

VHF: Marine signal station keeps watch on VHF Channel 16, from 0530 to 2000 hrs.

TUGS: A tug of 337 b.h.p. stationed at Sandakan.

BERTHING: (Also see "Anchorages").

(a) Mooring: The numbers of a vessel which is berthing alongside will be shown from signal station on Eastern end of Customs House. In addition, a cone indicating tidal stream will be hoisted pointed end of cone down indicates flood tide and pointed end up indicates ebb tide. Linesmen are on hand to receive a vessel's lines, a mooring boat will be provided by Marine Department if it is necessary to send lines to dolphins. Government Wharf, least depth 21 ft.

(b) Buoys: No mooring buoys.

(c) Lighters: No lighter fleet. The timber companies have their own lighters and scows which can sometimes be hired if not being used by these companies.

Rectangular Island Wharf: The particulars of the berths are as follows:

Berth No.	*Length (ft.)*	*Depth (ft.)*
1	700	30
2	540	24
3	250	18
4	400	24

Covered Storage:

(a) One transit shed 90,000 sq.ft. at new port site.

(b) One 8,100 sq.ft. and two 20,000 sq.ft. godowns at the old port site in town.

Equipment: New equipment only listed below:

(a) 10 towing tractors.
(b) 17 6,000 lb. forklifts.
(c) 26 5-ton trailers.

STEVEDORES: Stevedoring in hands of Port Authority who supply gangs as required.

(a) Working hours, 0730–1130 also 1130–1300 (overtime), 1300–1700 also 1700–2200 (overtime). Gangs ordered at least 12 hours before a vessel arrives.

(b) Overtime. When working in stream, overtime usually from 1100 to 1200 and 1800 to 2200 hrs. Application for permission to work overtime must be made to Customs not later than 1500 hrs. on the afternoon that overtime is to be worked or 1100 hrs. on Saturday for weekend overtime.

(c) Working Sundays and holidays. Work is normally carried out Sundays and it is sometimes possible to arrange for work on some public holidays, principal exception being Chinese New Year. Application must be made to Customs for permission to work Saturday afternoons, Sundays and public holidays.

(d) Rate. Log loading is good, comparing more than favourably with other Borneo ports. Rate of loading about 800 cu. ft. hoppus (20 B/L tons) per gang hour for logs, and 6 B/L tons per gang hour for sawn timber. Discharging general cargo about 10 tons per gang hour.

CARGO: (a) Tally: Tally clerks supplied by Agent if required. Sawn timber tallied on to scows by timber companies' clerks and tallied into ship by ship's tally clerks. Ship responsible for total number of pieces of timber shown on Mate's receipts. Letters of Credit do not allow the clause: "A quantity said to be" to be inserted on the B/Lading. Log timber tallied into ship by checking against specifications supplied by timber companies.

(b) Inward Cargo: Is tallied out of ship on to wharf or into lighter. Local watchmen can be supplied by Agent if necesary but it is generally found to be more satisfactory if these duties are carried out by crew. Damaged cargo is surveyed on the spot, otherwise no liability of vessel is acknowledged. Discharge carried out after permission has been obtained from Customs after manifest of inward cargo has been deposited. Cargo is delivered to consignees against production of relative Bill of Lading. Ship's responsibility to consignees ceases at ship's side but, in the case of short-landed cargo, reasonable proof must be given to Customs that cargo has not been landed. A short-handed Memo certified by Chief Officer is usually accepted as proof.

(c) Heavy Lifts: Usually landed overside on flat-top scows for delivery to private jetties, where they are man-handled to required site. Occasionally consignees provide low-loaders.

(d) Transhipment Cargo: After discharge of cargo from first carrier, transhipment cargo placed under supervision to Ports Authority, unless it is possible to arrange direct transhipment into small coastal vesels.

(e) Outward Cargo: Main export is log timber and is towed out to loading vessels in rafts, each one accompanied by 2 raftsmen. Loading is on a single swinging derrick with gun tackle; the other derrick being used for pulling the logs into position in the holds. Vessels should have, if possible, 2 snatch blocks available at each hatch where log timber is being loaded. Sawn timber loaded in normal manner from scows and lighters. Documents required are shipping order issued by Agent and list of specifications supplied by timber companies. Other exports are rubber, copra, coconuts, palm oil, jungle and sea produce.

(f) Refrigerated cargo: Only small quantities of refrigerated cargo loaded or discharged. No formalities or certificates being required other than compliance with normal Customs regulations. Inward fridge cargo is confined to foodstuffs, meat, etc., and outward to frozen prawns.

(g) Explosives: Explosives must be discharged into lighters under police escort and transported to an approved police store. A licence for their importation must be obtained from police prior to arrival of cargo, and Harbour and Police authorities must be informed of arrival of explosives in port either for discharge or as through cargo.

(h) Damaged Cargo: Ship's survey should be carried out at ship's side on all cargo discharged in a damaged condition and Chief Officer should note extent of damage, and sign certifying same. Cargo coming alongside in a damaged condition should be noted and M/R claused accordingly. Chief Officers are reminded that it is most unwise to load any copra which is rain or salt water damaged.

MEDICAL: *(a)* Hospitals: Duchess of Kent Hospital will receive sick seamen or officers. Three classes of wards, also isolation wing. Hospital equipped to carry out normal surgery.

(b) Inoculation: PHO will vaccinate or inoculate crew members at Duchess of Kent Hospital.

(c) Death on Board: PHO and police to be informed immediately. They will then make an investigation into cause of death. If satisfied that death was due to natural causes, a certificate will be issued, and arrangements may then be made for interning the body. Harbour Master must also be informed in the case of seamen.

TANKERS: Two bulk oil installations at Karimunting (Pavitt Point). Esso, with storage capacity of 2,080 tons and Shell, with storage capacity 15,730 tons.

Jetty extends 550 ft. from shore, is 128 ft. long with mooring dolphins 125 ft. from each end. Min. depth alongside 24 ft.

New oil berth, 1,000 ft. length between dolphins, with central discharging pier. Least depth alongside 30 ft. This berth also used for loading palm oil in bulk.

FRESH WATER: Can normally be supplied from wharf at rate of 20 t.p.h. No water boat. Occasionally water is not available and, at such times, Agent warns Principals in advance.

FUEL: No facilities for supply of fuel oil bunkers. Limited quantities of lubricants can be obtained in drums and bulk diesoline available at Shell jetty.

FIRE PRECAUTIONS: No fire-floats and in case of a vessel alongside, fire brigade should be summoned by dialling 999. The OCPD should be informed also.

WATCHMEN: No regulations regarding use of watchmen, who, however, can be supplied if required. There have been only very isolated reports of pilferage in Sandakan.

CONSULS: At Kota Kinabalu. Contact using Kota Kinabalu numbers.

DRY DOCKS/REPAIRS: No dry docks and very limited repair facilities. Marine Department slipway on Berhala Island is capable of taking ships up to 300 tons. Castings, forgings, welding, etc., can be done at this slipway. Permission to repair main engine of a vessel alongside the wharf should be obtained from the Port Manager, Sabah Ports Authority.

POLICE/AMBULANCE/FIRE: Ambulance: Duchess of Kent Hospital, tel. 2111; Police/Fire: Police Station Emergency, tel. 999.

GENERAL: *(a) Surveyors:* Harrisons & Crosfield (Sabah), Sdn. Bhd. are Lloyd's Agents, neither Bureau Veritas nor the American Bureau of Shipping are represented.

(b) Fumigation: No facilities.

(c) Ship Chandlers: All kinds of stores and provisions can be supplied at reasonable prices.

(d) Call Signals and Call Flags: (i) Continuous watch kept by signal station during day-light hours. In emergency such as serious injury or fire a ship should hoist appropriate International Code signal and blow whistle or siren to attract attention. Apart from these circumstances and for purposes of navigation vessels are prohibited from using sound signals for any other reason.

(ii) Signals for attracting Public Service Launch: By day: International Code Pendant No. 8. By night: three red lights vertical. Owing distance of anchorage from jetty these signals often indistinguishable by hire launches unless they are cruising in the harbour. Regular launch services can be arranged if required by Master. No restrictions against a vessel using its own launch or motor lifeboat but it must not land anywhere other than at Customs wharf.

(e) Recreation Facilities: Three cinemas in town which show English-language films. Cricket, football, and hockey matches can be arranged with local teams and several tennis courts available. Only suitable swimming beaches at Berhala Island at mouth of harbour. Yacht Club and Golf Club for members only, but several Shipping Companies pay Corporate Membership fee which enables all officers and first-class passengers to use club. Recreation Club offers facilities for large variety of sports and entertainment; visitors must be accompanied by a member. Churches in town for Anglican, Catholic and Lutheran worship.

REGULATIONS: 1. Arrival and Departure. The Owner or Agent of every vessel other than a small ship intending to call at a port shall, as soon as possible, and in any case not later than thirty-six hours prior to the estimated time of arrival of the vessel, give notice in writing to the Authority of such arrival and, if so desired, the requirement for a berth at a wharf.

2. The notice under this regulation shall be in a form prescribed by the Authority and shall contain full particulars regarding the cargo to be discharged and loaded, the embarkation and disembarkation of passengers, heavy lifts, special or perishable cargo, hazardous and dangerous goods (whether to be discharged at the port or not), and any other matters of importance relating to the working or safety of the vessel in the port.

3. The Master of every vessel entering or leaving a port between sunrise and sunset shall cause to be hoisted the national colours and the signal letters, if any, of the vessel. The national colours shall be exhibited from 0800 to sunset whilst the vessel remains in port.

4. The Master of every vessel arriving from outside the State of Sabah shall exhibit the Immigration and Quarantine signals contained in the First Schedule and shall also at the request of a customs officer hoist the Customs signals. Such signals shall remain exhibited until the appropriate officer has given permission for them to be lowered.

5. No vessel shall approach within 600 ft. of any other vessel exhibiting the Immigration, Health or Customs signals.

6. No person other than a Pilot may board or disembark from any vessel until the vessel is cleared inwards and the Immigration, Quarantine and Customs signals have been lowered.

7. Every vessel entering a port shall be anchored or efficiently secured to a wharf or buoy before commencing the loading or discharging of cargo and/or the embarkation or disembarkation of passengers.

8. No vessel shall leave any port unless in possession of a valid Port Clearance issued by or on behalf of the Director of Marine.

9. Special signals.

Significance	*By Day*	*By Night*
Immigration (for ships not carrying passengers)	International Code Signal "2 5"	Two green lights, six ft. apart, hoisted vertically where best seen.
Immigration (for ships carrying passengers)	International Code Signal "3 4"	Two green lights, six ft. apart, hoisted vertically where best seen.
Quarantine (vessel is Healthy request pratique)	International Code Signal "Q"	Nil
Quarantine (vessel is suspect)	International Code Signal "Q Q"	A red light over a white light and a separate hoist of red light over a green light and hoisted vertically six ft. apart where best seen.
Quarantine (vessel is infected)	International Code Signal "Q L"	
Quarantine (not received pratique)	Nil	A red light over a white light six ft. apart hoisted vertically where best seen.
Request Police Assistance	International Code Signal "S T"	A green over a white light, six ft. apart hoisted vertically where best seen.
Request Medical Assistance	International Code Signal "W"	A red light over a green light, six ft. apart, hoisted vertically where best seen.

AUTHORITY: Sabah Ports Authority.

AGENT: Harrisons & Crosfield (Sabah), Sdn. Bhd. Telegraphic address "Crosfield". Tel. 2141 ext. 51–54 (Shipping Department). Code – Bentley's Second Phrase.

SARAWAK COASTAL PORTS

Coastal anchorages at Sibuti, Niah and Suai, 28, 30 and 47 miles S.W. of Miri respectively are being used increasingly for the export of round logs, good holding ground is to be found approximately 3.5 miles offshore in 30 ft. of water. Caution should be observed in the event of sudden wind squalls from the West.

Vessels destined for coastal ports should report to Miri for Customs and Immigration Clearance.

Every vessel arriving in quarantine shall fly or show the appropriate International Quarantine signal; and no person other than a Pilot, Port Officer, Port Health Officer, Immigration Officer or Officer of Customs shall board the vessel; and no person shall disembark therefrom until the vessel has been cleared by the Port Health Officer.

The Master of every vessel of over 15 tons about to depart from a port for any place outside Sarawak shall cause the "Blue Peter" (International code Flag "P") to be hoisted, during day-light hours, for at least 12 hours before the vessel is due to sail, or if the vessel is in port for less than 12 hours, for the period of her stay in the port.

(1) The Master or the Agent of every vessel about to depart from a port shall, on demand by the Port Officer, produce for inspection the port clearance.

(2) The Port Clearance shall be in the form of an endorsement on the form of clearance prescribed under the Customs Ordinance or in such other form as may be approved by the Director.

A vessel arriving in, leaving from or shifting berth within a port shall hoist her signal letters, if any, whilst under way.

SEJINGKAT (Sungei Sarawak), Sarawak: 01.35 N. 110.26 E.

Anchorage off Kampong Sejingkat approximately 14 miles from mouth of river and 3 miles below Pending Point. (See "Kuching".)

Main timber loading point for the First Division of Sarawak. Loading used to be seasonal due to log rafts having to be towed from felling areas along coast. Since this is not possible during North-east monsoon season shippers now stockpile during favourable weather and loading continues throughout monsoon period.

Vessels up to 550 ft. length and 25 ft. draft regularly use anchorage. No facilities for obtaining fuel or fresh water.

Pilots may be picked up off Tanjong Po in the area marked "Pilots" on Admiralty Chart 1822 or at Sejingkat. In rough weather it may be necessary for a ship to follow or meet the pilot launch at the junction of Embang and Senari leads. Pilots for the Batang Lupar, Triso or Lingga Anchorages are also normally embarked off Tanjong Po by arrangement. The Kuching pilot launch is fitted with "Hague Plan" VHF radio for ship to Pilot communication.

Every vessel arriving in quarantine shall fly or show the appropriate International Quarantine signal; and no person other than a Pilot, Port Officer, Port Health Officer, Immigration Officer or Officer of Customs shall board the vessel; and no person shall disembark therefrom until the vessel has been cleared by the Port Health Officer.

The Master of every vessel of over 15 tons about to depart from a port for any place outside Sarawak shall cause the "Blue Peter" (International Code Flag "P") to be hoisted, during daylight hours, for at least 12 hours before the vessel is due to sail, or if the vessel is in port for less than 12 hours, for the period of her stay in the port.

(1) The Master or the Agent of every vessel about to depart from a port shall, on demand by the Port Officer, produce for inspection the port clearance.

(2) The port clearance shall be in the form of an endorsement on the form of clearance prescribed under the Customs Ordinance or in such other form as may be approved by the Director.

A vessel arriving in, leaving from or shifting berth within a port shall hoist her signal letters, if any, whilst under way.

SIBU, Sarawak (incl. Binatang and Sarikei): 02.24 N. 111.56 E.

Sibu is the major town in the Third Division of Sarawak. There are 2 inward routes *(a)* via Paloh River and *(b)* via Rajang River. Sibu is 51 miles from the sea via Paloh, and 70 miles via Rajang.

(a) Paloh Entrance: This route to Sibu is almost exclusively used by overseas vessels and the use of a Pilot is recommended, they having knowledge of other ship movements in the river (see "Pilotage").

The Outer Bar limits the draft to 17 ft. during the Landas (N.E. monsoon) or to 20 ft. during the summer months. The depth on the axis of the channel is now 11.5 ft. chart datum. The 2 buoys are fitted with radar reflectors and the Fairway Buoy is visible for a distance of 10 miles. Care should be taken transitting the channel against being set to the Northward by the ebb tide as there is a 7 ft. patch in position 2° 29.2′ N. 111° 10.5′ E. The entrance to the Kuala is marked by a light beacon at Tanjong Sedi on the North bank of the river.

Strong cross currents and swell especially during the N.E. monsoon period (November to March) necessitate caution when entering.

An inner bar with a least depth of 12 ft. exists where the Paloh joins the Seredeng at Tanjong Gelang. This crossing is marked by unlit transits and being sheltered no allowance is necessary for swell.

Vessels can cross the Outer Bar at night then anchor off Tanjong Sedi to await daylight.

(b) Rajang Entrance: Draft for crossing Outer Bar is governed by state of tide with an allowance for swell together with depth of 19 ft. below ACD. Vessels drawing 29.5 ft. have successfully crossed this Bar. However, this draft will only give access to the Deep Water Anchorage at Tanjong Mani and vessels proceeding further up river are restricted as follows:

(i) Deep water anchorage in Rajang River situated at Tanjong Mani. Has a capacity for about 6 large ships (500 ft.) and 4 small ships (300 ft.), it is normally used for loading logs. (See separate information for "Tanjong Mani".)

(ii) From Tanjong Mani inwards there is a Bar situated about 3 miles below Sarikei with a least depth of 13 ft. below ACD thus limiting drafts to 23 ft.

(iii) From Sarikei to Binatang, the next port, the river is winding with some shallow patches with depths of 15 to 18 ft. below ACD.

(iv) Proceeding from Binatang towards Tanjong Pendam and thence to Sibu vessels are limited to 13 ft. draft and 200 ft. length.

(v) Leba'an corner, 15 miles below Sibu is the junction of the 2 routes used by sea-going vessels bound for Sibu. A certain amount of shoaling has taken place here at the approach from the Rajang channel and it has been found necessary to restrict the length of vessels using this route (Rajang) to 200 ft. with a draft of 13 ft. This route is generally used by the smaller overseas vessels trading from Singapore, etc. There is an obstruction off Tanjong Ensurai approximately 6.25 miles up river from Leba'an bend which has a least depth over it of 15 ft. Caution should also be exercised when rounding Tanjong Bindje due to 3 shoals across the river, 1 of which has a least depth over it of 11 ft.

Note: River Igan and Sungei Kut. The River Igan affords access to Sibu from the North. It is approximately 60 miles long and depth over the bar is 4 ft. with an average rise of 5 ft. Ocean-going oil tankers of up to 2,000 tons displacement entering the river from the Sibu end discharge at Sungei Meral Oil Wharf about 3 miles from Sibu.

The largest vessel to use this wharf was the Japanese vessel Nisso Maru of 1,566 gross tonnage, 264 ft. overall length with a draft of 16 ft. Larger vessels using this wharf are not envisaged due to the wharf position and structure.

DOCUMENTS: Port Clearance to be surrendered to Customs when boarding.

Crew lists and passenger lists, 2 copies for Immigration Department, 2 copies for Rejang Port Authority, 2 copies for Customs, 1 copy for Port Health Officer.

List of ship's stores (2 copies for customs).

List of ammunition (2 copies for customs).

Health Documents (Vaccination certificates and Cholera Inoculation Certificates to be examined by Health Inspector).

PILOTAGE: *(a)* Kuala Paloh. Pilots usually embarked off Tanjong Sedi, however, if master requires a Pilot to board at Fairway Buoy he should indicate this in his ETA telegram.

Ship Masters wishing to use Paloh channel should state this clearly in their ETA messages.

(b) Rajang River (Tanjong Mani, Sarikei, Binatang and Sibu). Pilots normally embarked, weather permitting in buoyed channel West of Jerijeh lighthouse but it may be necessary for a ship to follow the pilot launch to sheltered water inside turning buoy. This applies mainly to larger ocean ships calling at Tanjong Mani and smaller vessels on a first visit, but a Pilot may be picked up anywhere to suit provided clear and precise information is given in the arrival telegram. A few of the more frequently requested points are off South Jerijeh Beacon, Rajang Village and for upriver berths, Tanjong Mani itself, or even as far up as Tanjong Delima. The Rajang Pilot launch "Raya" is fitted with "Hague Plan" VHF radio for ship to Pilot communication.

Application for Pilots should be made giving 24 hours' notice of arrival to "Shipping", Sibu or to "Shipping", Sarikei, for Sibu and Tanjong Mani ports respectively. Ships proceeding to Sibu and requiring a Pilot should indicate positively in their arrival telegram which channel they wish to use by adding "Paloh" or "Rajang" in the text, bearing in mind the max. length via Rajang is 200 ft.

ANCHORAGES: *(a)* See "Tanjong Mani".

(b) Sibu Anchorage. Some foreign-going vessels load, with Customs permission, at the mid-stream anchorage when Customs wharf is congested.

(c) Restricted Anchorages.

(i) Abeam of Loba Selemit on the true right bank of the Rajang River in position 02° 08′ 22″ N. 111° 16′ 35″ E. for loading and discharging dangerous goods.

(ii) The Anchorage defined by a line running 045° 2.6 cables from position 02° 16.89′ N. 111° 49.28′ E. on Pulo Kerto, thence 135° 8 cables to position 02° 16.5′ N. 111° 50.4′ E. thence 225° 1.9 cables to shore on Pulo Kerto. For loading and discharging dangerous goods other than petroleum.

(iii) The berth alongside the Sungai Merah Wharf in position approximately 2 miles downstream from the junction of the Rajang/Igan River on the true right bank. For loading and discharging petroleum.

MAX. SIZE: Largest vessel to berth Sibu was 7,372 gross tons and overall length 450 ft.

Deepest drafted vessel to berth Sibu was 22 ft. 6 in.

HEALTH: Every vessel arriving in quarantine shall fly or show the appropriate International Quarantine signal; and no person other than a Pilot, Port Officer, Port Health Officer, Immigration Officer or Officer of Customs shall board the vessel; and no person shall disembark therefrom until the vessel has been cleared by the Port Health Officer.

BERTHING: *(a)* Principal wharves at Sibu.

1. Main wharf 1,500 ft. long (incorporating the former Lighterage Wharf) with min. depth alongside 20 ft.
2. Burong Apu wharf 250 ft. long with a least depth of 17 ft. Used for larger coastal craft.
3. Floating landing stages 576 ft. long with least depth of 4 ft. Used for smaller coastal and river craft.
4. Upstream of the public wharves several private wharves are used for timber and general cargo.
5. Sibu-Sungei Merah oil wharf is "T"-shaped with a berthing face of 73 ft. and a least depth alongside of 15 ft. It can accommodate vessels up to 245 ft. long and 15 ft. draft.

(b) Sarikei. Wharf 198 ft.×30 ft. long, can accommodate vessels up to 2,000 d.w.t. up to 23 ft. draft. There is an old Customs Godown on shore and a new transit shed with total area of 13,600 sq. ft.

(c) Binatang. Wharf 158 ft. long by 20 ft. wide with a least depth alongside of 15 ft. There is a transit shed of 5,300 sq. ft.

STEVEDORES: The Rajang Port Authority provide all labour necessary for loading and discharging at Sibu, Sarikei and Binatang.

REPAIRS: 5 shipbuilding (up to 100 gross tons in size) and repairing yards near Sibu. These deal mainly with repairs to wooden or steel coastal and river craft. 1 yard has a slipway capable of taking vessels up to 500 gross tons.

GENERAL: Small quantities of diesel oil bunkers available, also provisions and fresh water. Principal exports rubber, pepper, timber and sago.

REGULATIONS: The Master of every vessel of over 15 tons about to depart from a port for any place outside Sarawak shall cause the "Blue Peter" (International Code Flag "P") to be hoisted, during day-light hours, for at least 12 hours before the vessel is due to sail, or if the vessel is in port for less than 12 hours, for the period of her stay in the port.

(1) The Master or the Agent of every vessel about to depart from a

port shall, on demand by the Port Officer, produce for inspection the Port Clearance.

(2) The Port Clearance shall be in the form of an endorsement on the form of clearance prescribed under the Customs Ordinance or in such other form as may be approved by the Director.

A vessel arriving in, leaving from or shifting berth within a port shall hoist her signal letters, if any, whilst under way.

AUTHORITY: Rajang Port Authority.

TANJONG MANI, Sarawak: 02.09 N. 111.21 E.

Rejang River entrance. The least depth on the bar remains at 19 ft. The entrance is well lit by two lighthouses and one light beacon and the bar is marked by two light buoys.

Tanjong Mani. This is a deep water anchorage 16 miles from the river entrance, mainly used by vessels loading timber.

Size of vessels using Tanjong Mani limited only by depth on bar. Ten ships can be safely accommodated at anchorage at any time, roughly six large (500 ft. length) and four small (300-400 ft.). So far no ship has been delayed awaiting a berth though eight or nine ships anchored there at the same time is now a regular feature. Vessels up to 29 ft. 6 ins. draft have crossed the bar.

Pilots are normally embarked, weather permitting, in the buoyed channel West of Jerijeh lighthouse but it may be necessary for a ship to follow the pilot launch to sheltered water inside the turning buoy. This applies mainly to the larger ocean ships calling at Tanjong Mani and smaller vessels on a first visit but a Pilot may be picked up anywhere to suit provided clear and precise information is given in the arrival telegram. A few of the more frequently requested points are off South Jerijeh Beacon, Rejang Village and for upriver berths, Tanjong Mani itself, or even as far up as Tanjong Delima. The Rejang pilot launch Layang Laut, is fitted with "Hague Plan" VHF radio for ship to Pilot communication.

Application for Pilots should be made giving 24 hours' notice of arrival to "Shipping", Sarikei.

Anchorage. Abeam of Loba Selemit on the true right bank of the Rejang River in position 2° 08′ 22″ N. 111° 16′ 35″ E. is restricted to loading and discharging any dangerous goods.

SHIPMASTER'S REPORT: According to Pilot the above mentioned anchorage is Rejang Village Anchorage, while the true Tanjong Mani Anchorage is in position 02° 09′ 40″ N., 111° 20′ 50″ E. Our vessel, 26,933 d.w.t. LOA 176.75 m. and draft of 24 ft. 07 in. anchored in position 02° 09.8′ N., 111° 21.2′ E.

TAWAU, Sabah: 04.15 N. 117.53 E. (See Plan Book)

PORT LIMITS: A line drawn from Batu Tinagat on the Mainland to the boundary mark on Sebatik Island between Indonesian Borneo and Sabah (Malaysia) and thence through the island to Burs Point on the Mainland, and thence intersecting all waterways to the West of Burs Point, entering the Serudong River.

DOCUMENTS:

(a) To be Produced on Arrival:

Customs

2 Manifests in prescribed form.
2 Crew Lists.
1 Last Customs Clearance.
2 Stores Lists.
2 Passenger Lists.
2 Arms Lists.

Marine

1 Marine Dept. Boarding Report, required to be completed.
1 Last Port Clearance.
1 Crew List.
1 Passenger List.

Agent

4 (2 for SPA) Manifests in the prescribed form
1 Crew List.
1 Passenger List.

Immigration

2 Crew Lists.
2 Passenger Lists.

Travel Control Office

2 each. Crew Lists and Passenger Lists.

(b) To be Supplied to Ship before Departure:

Manifests, as required by vessel.
1 Port Clearance and 1 Customs Clearance.
3 copies of Passenger List.

PILOTAGE: A Pilot is available from 0600 to 1800 hrs. for berthing vessels given reasonable notice (48 hours). Not compulsory.

ANCHORAGES: Good anchorage in 8 fathoms 1,000 yd. to 1,300 yd. W.N.W. of wharf; and 350 yd. South there is an anchorage in 8.5 fathoms.

Petroleum Anchorage. An area bounded by parallels of 04° 15′ N. and 04° 16′ N. and meridians of 117° 51′ E. and 117° 52′ E. This area is to be marked "Petroleum Anchorage".

Explosives Anchorage. An area bounded by parallels of 04° 12′ N. and 04° 13′ N. and meridians of 117° 52′ E. and 117° 53′ E. This area is to be marked "Explosives Anchorage".

Quarantine Anchorage. An area bounded by parallels of 04° 12.5′ N. and 04° 13.5′ N. and meridians of 117° 54′ E. and 117° 55′ E. This area is to be marked "Quarantine Anchorage".

RESTRICTIONS: *(a)* Communication ship/shore when lying on roads: Regular launch services difficult to arrange if required by Master. No recognised signals for summoning a launch, as distance between small boat jetty and anchorage is too great for flag signals to be recognised. No restrictions against a vessel using its own launch or motor life-boat apart from fact that it must not land anywhere other than at Ports Authority Wharf.

(b) Explosives: No vessel carrying explosives shall come within 500 yards of shore or any other vessel except with written permission of Port Manager which will be given provided that:

(i) quantity does not exceed 2,000 lb. of explosives of Class V and VI and are carried in a certified magazine, and there is no other dangerous cargo on board as certified in writing by the Master.

(ii) quantity does not exceed 3,000 lb. and are exclusively of one of the following classes III, IV or VII.

Danger flag must be flown by day and a red light by night.

HEALTH: *(a)* Quarantine. The Sabah Government are signatories to WHO convention on Quarantine regulations. Port Health Doctor will not board, unless vessel comes from an infected port. Instead Maritime Declaration of Health is to be filled out and handed to Boarding Officer of Marine Department, who will require one copy of crew list and one copy of passenger list. Vessels should cable Agent prior arrival advising last port of call and whether vessel healthy.

(b) Immigration. Immigration officer will board vessel on arrival and clear her inwards. No restrictions on crew and/or passengers going ashore. Immigration will require 2 copies of crew list and 2 copies of passenger list. Vessels are cleared inward until 1800 hours only. If there are special circumstances arrangements can be made to clear vessels inward after this time.

RADIO: Information required prior arrival, ETA Tawau with as much prior notice as possible. Number of gangs required. Quantity of fresh water required.

VHF: A Maritime VHF radio telephone service now operates in the Port of Tawau on Hague Plan Channels 16 and 12.

Continuous listening watch is kept on Channel 16 and the station is operative between the hours of 0600 and 2000 daily.

Vessels are requested to make use of the above facility for notifying ETA, pilotage requirements etc. Berth availability will be notified on vessel's call.

TUGS: No tugs available.

BERTHING: *(a)* Wharf Light at Tawau in position on North-west end of wharf, 04° 14′ 32″ N. 117° 52′ 56″ E.

(b) Tides/Linesmen. The numbers of a vessel which is berthing alongside will be flown from signal station. In addition a cone, indicating tidal stream will be hoisted, pointed end of cone down indicates flood tide and pointed end up indicates ebb tide. Linesmen are on hand to receive a vessel's lines; a motor boat can be hired to assist in berthing if prior advice is given.

(c) New Wharf. Consists of a 220 ft. long approach causeway extending from a reclamation area and a 630 ft. long wharf, 40 ft. wide with a dolphin in line +100 ft. off each end. Least depth 20 ft.

(d) Monsoon. During strong wind from S.E. and S.W. ships are liable to range alongside wharf, and during S.W. monsoon sea breeze may make it difficult for ships to leave wharf in the afternoon.

(e) Buoys: No mooring buoys in Tawau.

(f) Lighters: No lighters available except a few wooden and steel lighters owned by Bombay Burmah Trading Corpn. Ltd. and Borneo Abaca Limited. Hire of these lighters can be arranged when they are not being used by owners, which is seldom.

SPECIALISED CARGO-HANDLING FACILITIES: None. Can handle palletised cargo only.

STEVEDORES: *(a)* Stevedoring in the hands of Sabah Ports Authority who will supply gangs as required.

(b) Working hours 0730–1130 hours, 1300–1700 hours, 1800–2200 hours.

(c) Overtime: Overtime working hours are from 1800 to 2200 hours. Application must be made to Customs one day in advance; double rate charged.

(d) Sundays and holidays: Work normally carried out on Sundays and holidays, the only exception being Chinese New Year. Application must be made to Customs for permission to work Saturday afternoons, Sundays and public holidays.

(e) Rates: General cargo about 8 tons per gang/hour (loading/discharging).

CARGO: *(a)* Special Cargo Regulations: No vessel with dangerous cargo may be alongside after sunset except at discretion of Port Manager. No dangerous cargo may be discharged simultaneously with general cargo except with permission of Port Manager.

Heavy lifts usually landed overside on to flat-top scows. Customs bonded store is available with about 4,000 sq. ft. of space including Customs Liquor and tobacco store. There are no private bonded warehouses to date. There are no facilities for handling or storing bulk cargoes in any quantity.

Livestock: Subject to approval of Veterinary Authority, certain animals including cattle are prohibited imports and exports except under licence.

(b) Damage. Ship's survey should be carried out on all cargo discharged in a damaged condition and Chief Officer should note extent of damage, and sign, certifying same. Cargo coming alongside in a damaged condition should be noted and M/R claused accordingly. Chief Officers are reminded that it is most unwise to load any copra which is rain or salt water damaged.

(c) Tally: Tally clerks can be supplied by Agent if required, on receiving advance notice.

(d) Inward. Inward cargo is tallied out of ship onto wharf or into lighter. Damaged cargo surveyed on the spot, otherwise no liability of the vessel is acknowledged. Discharge carried out after permission has been obtained from Customs after manifest of inward cargo has been deposited. Cargo delivered to consignees against production of relative Bill of Lading. Ship's responsibility to consignees ceases at ship's side, but, in the case of short-landed cargo, reasonable proof must be given to Customs that cargo has not been landed. A short-landed Memo certified by Chief Officer is usually accepted as proof.

(e) Transhipment. After discharge of cargo from first carrier, transhipment cargo is placed under the supervision of the Customs, unless it is possible to arrange direct transhipment into small coastal vessel.

(f) Outward. When vessels berth alongside, packages are brought by motor transport and lighters; when in roads, by lighters.

(g) Refrigerator. Only small quantities of refrigerator cargo loaded or discharged. No formalities or certificates being required other than compliance with normal Customs regulations. Inward refrigerator cargo is confined to foodstuffs, meat, etc., and outward to frozen fish.

(h) Explosives. Explosives must be discharged into lighters or immediately on arrival onto wharf under police escort and transported to an approved police store. A licence for their importation must be obtained from police prior arrival of cargo, and Harbour and Police authorities must be informed of arrival of explosives in port either for discharge, or as through cargo.

TANKERS: Shell jetty, least depth 14 ft.
Also see "Shipmaster's Report".

MEDICAL: *(a)* Hospitals. Government General Hospital is only hospital in town, and will receive any sick seamen or officers. 3 classes of wards, but first class ward can only accommodate 2 persons. Hospital is equipped to carry out normal surgery.

(b) Inoculation. Port Health Officer will vaccinate or inoculate Crew members at General hospital.

(c) Port Health Officer. General Hospital, General Office 73533, 72191. Medical Officer-in-Charge 71206. M.O.'s Residence 72239.

FRESH WATER: Can only be supplied at wharf. 24 hours notice should be given of a vessel's water requirements. Usual rate of supply is about 15 t.p.h. A water barge is available but no guarantee of availability.

FUEL: Not available except diesoline in drums.

FIRE PRECAUTIONS: No fire floats and in the case of a vessel alongside catching fire, the fire brigade should be summoned by dialling 2999. The OCPD should also be informed.

CONSULS: At Kota Kinabalu.

REPAIRS: No facilities.

POLICE/AMBULANCE/FIRE: *(a)* Police/Fire, Tel. 999; Ambulance/Hospital 73533.

(b) Accidents: Hoist a two-flag signal and give a blast of the whistle to call attention of signal station. Police and the hospital should be informed immediately of any untoward incident.

GENERAL: *(a) Surveyors:* Harrisons & Crosfield (Sabah) Ltd., as Lloyd's sub-Agents, may appoint a Surveyor if a survey is requested.

(b) Fumigation: No facilities.

(c) Ship Chandlers: Fresh vegetables obtainable in limited quantities early every morning from vegetable market.

(d) Priority: Vessels are berthed on a "First come first served" basis. Vessels with palletised cargo get priority.

(e) Watchmen: These can be supplied if required.

REGULATIONS: *(a)* Arrival and Departure. The Owner or Agent of every vessel other than a small ship intending to call at a port shall, as soon as possible, and in any case not later than 36 hours prior to the estimated time of arrival of the vessel, give notice in writing to the Authority of such arrival and, if so desired, the requirement for a berth at a wharf.

2. The notice under this regulation shall be in a form prescribed by the Authority and shall contain full particulars regarding the cargo to be discharged and loaded, the embarkation and disembarkation of passengers, heavy lifts, special or perishable cargo, hazardous and dangerous goods (whether to be discharged at the port or not), and any other matters of importance relating to the working or safety of the vessel in the port.

3. The Master of every vessel entering or leaving a port between sunrise and sunset shall cause to be hoisted the national colours and the signal letters, if any, of the vessel. The national colours shall be exhibited from 0800 hrs. to sunset whilst the vessel remains in port.

4. The Master of every vessel arriving from outside the State of Sabah shall exhibit the Immigration and Quarantine signals contained in the First Schedule and shall also at the request of a Customs Officer hoist the Customs signals. Such signals shall remain exhibited until the appropriate officer has given permission for them to be lowered.

5. No vessel shall approach within 600 ft. of any other vessel exhibiting the Immigration, Health or Customs signals.

6. No person other than a Pilot may board or disembark from any vessel until the vessel is cleared inwards and the Immigration, Quarantine and Customs signals have been lowered.

7. Every vessel entering a port shall be anchored or efficiently secured to a wharf or buoy before commencing the loading or discharging of cargo and/or the embarkation or disembarkation of passengers.

8. No vessel shall leave any port unless in possession of a valid Port Clearance issued by or on behalf of the Director of Marine.

(b) Special signals

Significance	*By Day*	*By Night*
Immigration (for ships not carrying passengers)	International code Signal "2 5"	Two green lights, 6 ft. apart, hoisted vertically where best seen.
Immigration (for ships carrying passengers)	International Code Signal "3 4"	Two green lights, 6 ft. apart, hoisted vertically where best seen.
Quarantine (vessel is Healthy request pratique)	International Code Signal "Q"	Nil
Quarantine (vessel is suspect)	International Code Signal "Q Q"	A red light over a white light and a separate hoist of red light over a green light and hoisted vertically 6 ft. apart where best seen.
Quarantine (vessel is infected)	International Code Signal "Q L"	
Quarantine (not received pratique)	Nil	A red light over a white light 6 ft. apart hoisted vertically where best seen.
Request Police Assistance	International Code Signal "S T"	A green light over a white light, 6 ft. apart hoisted vertically where best seen.
Request Medical Assistance	International Code Signal "W"	A red light over a green light, 6 ft. apart, hoisted vertically where best seen.

SHIPMASTER'S REPORT: 1976
Government Oil Wharf:
Position: 04°15.5′ N. 117° 50′ E. 2 miles N.W. of Main Cargo Pier. Least depth in channel from sea to berth — 30 ft. Vessels to be ballasted to 1/3rd deadweight. Density, 1025. Vessel docks daylight only, undocks anytime at any stage of tide. Anchorage 0.5 mile S.W. of jetty. 5 lengths of ship's hose required. Manifold, 10 in. Length of shoreline 3,000 ft. All products handled. Shore booster pump cannot be used. No steam.

Pilot boards at Quarantine Anchorage. 48 hours notice required. No tugs available. Accommodation ladder required for Quarantine but not at berth.
Fresh water available ex-barge. Other services available. Fresh provisions, repairs, Machine Shop, Airport, Lloyd's Surveyor, Telex, Doctor, Hospital, Laundry, Groceries and Meats. No slop tanks.

AUTHORITY: Port Manager, Sabah Ports Authority.

AGENT: Harrisons & Crosfield (Sabah) Ltd., Dunlop Street. Telegraphic address: "Crosfield". Tel. Manager 72624.

NOTES

Please also advise Shipping Guides Ltd.

Malta

VALLETTA: 35.54 N. 14.31 E.

DOCUMENTS: Pratique deposition to be filled by Master on arrival, form supplied by the boarding Customs Officer. 3 Crew Lists. 2 Bonded Store Lists and 1 list of dutiable items belonging to crew on arrival. 3 Passenger Lists.
PILOTAGE: Compulsory. Pilot boards at Fairway Buoy weather permitting. Pilot available at all hours for small ships, daylight hours for large vessels. Sea Pilot berths vessel for civil berths, Malta Dry Docks or Buoy Berths. In bad weather Pilot boards inside entrance. Vessel's ETA should be given to Agent at least 12 hours' prior arrival to order Pilot. Pilot boat located near Customs House. Pilot boat not equipped with VHF.
ANCHORAGES: Sea anchorage off Grand Harbour. To East of line, Fairway Buoy to entrance, medium to poor holding ground. To West of line, holding ground excellent.
RESTRICTIONS: Min. depth entrance channel (over wreck) 52 ft. Harbour channels – Bighi Bay 58 ft., French Creek 43 ft., Marsa 32 ft. Nature of bottom entrance channel rock and mud. Harbour channels mud. Harbour entrance and approaches affected by current – in N.W. winds there is a set of up to 0.5 knot from N.W. to N.E. Port is subject to closure in gregale (N.E. gale) conditions – Winter months occasionally, not more than 4 times a year.
MAX. SIZE: Discharging Berths – New Quay.
Berths 1, 2, 3. Min. water depth alongside berth 32 ft. Max. length acceptable 350/400 ft. Max. draft acceptable 30 ft.
Berth 4. Min. water depth alongside berth 32 ft. Max. length acceptable 550 ft. Max. draft readily acceptable 30 ft.
HEALTH: Port Medical Officer grants pratique when boarding on arrival. Accelerated pratique can be granted through Pilot provided crew all in good health and ship has not called any infected port during last 15 days, and is coming from a European port.
RADIO: Radio call sign 9HD. Radio telephony working frequency 2625 kHz. Listening watch 2182 kHz.
RADAR/VHF: No radar service available. VHF available by Malta Dry Docks. Frequency 156.8/156.55/157.9 Mc/s. Call sign Malta Dry Docks. Range 10 miles. Master can call signal station on VHF Channels 16 or 12.
TUGS: Join vessel just inside harbour entrance. Lines at discretion of ship's Master.
BERTHING: No specific requirements necessary. Can berth at any time but subject size of vessel and weather conditions. Ro/Ro and container facilities available.
CRANES: 1×60 ton floating crane, 1×60 ton mobile crane, 1×20 ton mobile crane. Additional mobile cranes with capacity up to 15 tons.
STEVEDORES: Ordered by Agents. At least 24 hours notice required.
MEDICAL: Notice must be given to Agent soon as possible to make necessary arrangements. Hospital facilities available. Crew must be in possession of inoculation/vaccination certificates, etc.
TANKERS: Vessels must be gas-free except at tank-cleaning berth, where ships with not more than 2 tanks gas free are allowed. Slop (residue) discharging facilities available. No. of tanker berths: Parlatorio Wharf (Navy) Max. draft 35 ft.; max. length 650 ft. Marsaxlokk – has Saptan Dolphin (Navy) max. draft 34 ft.; max. length 650 ft.
FRESH WATER: Unlimited amount ex barge between 20 to 80 t.p.h. 24 hours notice required.
FUEL: Bunker Berth – Sea Malta Co. Ltd. at new quay. Grades handled include MFO. MDO. TFO. GO. Max. draft 32 ft. 48 hours notice required. Bunkering berth also used for discharging cargo and available when not occupied by discharging vessel.
FIRE PRECAUTIONS: Precautions according to Petroleum Ships Regulations. Civil tugs partly equipped with fire fighting equipment but not well trained.
GANGWAY/DECK WATCHMEN: Not compulsory but recommended.
OPENING/CLOSING HATCHES: Opening by stevedores. Closing of hatches by crew. Stevedores can close hatches at extra cost.
CERTIFICATES: Ship's Register; Load Line Certificate; Derat Certificate.
IDENTIFICATION CARDS: Not needed.
CONSULS:

	Tel.
American	623653 620424 623216
Austrian	29182 627356
Belgium	625071 28180
Danish	624858
Finnish	621788
French	31107 35856
German	33415
Greek	625192
Haiti	624713
Ethiopian	624713
Korea	22372 22780

	Tel.
Italian	621985 621986 621988
Israel	33094
Netherlands	624858
Norwegian	625488
Oman	40404
Peruvian	624687
Polish	24306
Portugal	624400
Monaco	625488
Spain	625071 28180
Swedish	624858
Switzerland	27750
Turkish	626589
Liberian	620431
Japanese	620434

CUSTOMS ALLOWANCES: 200 cigarettes allowed for each crew member. Wine and/or Spirit, None to crew except Captain, at Customs' discretion.
CARGO GEAR: Factory Act Book for Cargo Gear. Cargo work cannot commence unless certificates valid.
REPAIRS: All types of deck and engine repairs possible.
DRY DOCKS: Malta Dry Docks Corp. operates 5 dry docks up to 861 ft. length, 130 ft. 6 in. wide.
Red China Drydock under construction. Capacity 300,000 d.w.t. Lenght 360 m. Width 62 m. and depth 10.72 m.
SERVICES: Tank cleaning and underwater hull cleaning undertaken by Malta Dry Docks Corp.
REPATRIATION: Facilities exist for crew changes and repatriation by air.
AIRPORT: 4 miles from port. Served by British Airways, Alitalia and Air Malta daily to London and Rome.
TIME: GMT plus 1 hour in Winter. Summer time kept from April till September.
HOLIDAYS: New Year (1st January); St. Paul's Shipwreck (10th February); St. Joseph's Day (19th March); Good Friday (no work performed at all on this holiday and in the afternoon of Tuesday Carnival); St. Joseph the Worker (1st May); Ascension Day (date changes); St. Peter and St. Paul (29th June); Assumption of B.V. Mary (15th August); National Day (8th September); All Saints Day (1st November); Immaculate Conception (8th December); 13th December (Republic Day); Christmas Day (25th December) (no work performed at all).
POLICE/AMBULANCE/FIRE: Police 26934; Ambulance 21251; Shore Fire Brigade 24001.
TELEPHONES: Can be arranged in Dry Docks berth, and on buoys.
GENERAL: Important that tankers are gas-free before entering, and that cargo vessels do not carry explosives.
AUTHORITY: Superintendent of Ports, Valletta.

AGENT: Kirton & Co. Ltd. 38 Lascaris Wharf, Valletta, Malta. Telegraphic address: "Kirton", Valletta, Malta. Tel. 624360. After hours 20599 or 26388. Telex MW 241. Sole and exclusive Agents for Lambert Brothers Ship Agencies Ltd.

NOTES

Please also advise Shipping Guides Ltd.

Marianas Islands

GUAM, (Apra Harbour): 13.26 N. 144.39 E.

DOCUMENTS: Guam is part of the American Trust Territories in the Western Pacific and official documentation is as for mainland U.S. ports, including visaed crewlist completed at port of departure prior to Guam. Vessels should have a stock of American Crew Lists Form 1-148 and Form 1-95A. The American Alien Crewman Landing permit is acceptable and preferred. This is the plastic identification card previously issued on the U.S. coast.

Required on arrival:
- Vaccination Cards.
- Visaed Immigration Crew List.
- 4 Crew Lists.
- 4 Passenger Lists.
- 1 Store List.
- Clearance from last port.
- Cargo papers.

Have ready Immigration Form 1-94 for each passenger and Form 1-95A for each alien unless they have 1-184 plastic Identification Card. Shore Passes not required. Crew Customs Declaration not required.

PILOTAGE: It is advisable to have on board U.S. charts for Guam: C & GS 4197 Apra Harbour. 4198 Guam Approaches.

Pilot usually boards at Quarantine Anchorage, or just inside breakwater. When requested will board outside, weather permitting. Pilot mandatory in Inner Harbour. Pilot available at all times.

ANCHORAGE: Harbour -range 084° True, 2 green lights. Strong set across harbour entrance, Navy recommends 10 knots entering. Quarantine Anchorage at Middle ground, Outer Harbour, depth 45 ft.

RESTRICTIONS: The Harbour Master of the Port Authority of Guam, is in complete control of the approaches to Guam and it is essential to obtain clearance and permission to enter Guam from "Harbour Master" Port Authority, call sign KUF–810 at least 24 hours prior to arrival. Permission is readily granted with the condition to request permission again two hours prior to arrival at Guam. This time from Guam controls, call sign KUF–810 and NRV (USCG).

HEALTH: If from suspect port, Inspector boards at anchorage or at pier for thorough check. Grants Pratique.

RADIO: Harbour Master Radio Station, call sign KUF–810 ship/shore watching 24 hours. Use of USCG Station "NRV" for best service if unable to reach KUF–810 due to limitation of range. Prior to arrival call Channel 16 upon approaching Alpha Hotel (VHF) for further instruction giving ETA (account harbour traffic).

VHF: Masters of vessels approaching should keep watch on Channels 16 and 13.

BERTHING: Vessels may berth Port or Starboardside upon request of the Master or Agent at F–3, 4, 5 except F–6 Portside to 1 large tug and 1 small tug normally used. Ship's gangway is required. Local information from Pilots states that after completion of this oil berth, a submerged wreck was discovered, said to be a 500 ft. long cargo vessel, and lies across and below the vessel in this berth, on the Eastern side of the jetty. It is advisable not to drop anchors -should they have to be used – until vessel has passed over the wreck. There have been instances of forward springs or breastlines becoming fouled in this wreck during operations.

HOSES: 4×10 in. flexible hoses connected by ship's crew. 2×20 in. lines.

IMMIGRATION:

1. *Prior to Departure for Guam:*
   - A. Visaed Crew List: Prepare 1 Crew List on U.S. Form 1-418 and have it visaed by a U.S. Consulate at a port prior to Guam. Without this, crew shore leave may be denied.
   - B. Passengers must have a valid passport and also must have an appropriate U.S. Visa whether landing or not on Guam.
   - C. Intransit passengers do not need U.S. visa if the Owners of the vessel have signed a contract called "Immediate and Continuous Transit Agreement" with the Commissioner of Immigration at Washington, D.C.
   - D. Obtain a supply of U.S. Form 1-84 for passengers and U.S. Form 1-95 for Crew.
2. *Prior to Arrival at Guam:*
   - A. Passenger List, Form 1-418 prepare 3 copies of Passenger List on U.S. Form 1-418 for Immigration, Customs and Agent.
   - B. Passenger Landing Card Form 1-94 these to be presented by passenger with passport.
   - C. Crewmen's Landing Permit Form 1-95A prepare or have on hand 1 U.S. Form 1-95A for each alien crew member. Not required if crew member is a permanent resident with U.S. I-184 laminated "*Crewmen's Landing Card*", not required of U.S.A. Citizens. Please present Form I-95A in appropriate Seaman's passport or identification book. Form I-95A can be used repeatedly for future arrivals of same crewman on same ship.
3. *Upon Arrival at Guam:*
   - A. U.S. Federal Immigration Inspector boards upon arrival at pier, must see all passengers with their passport and Form I-94 and all crew members with their passport or identification books and Form I-94A or Form I-184.
   - B. Passengers and crew are required to be ready for inspection immediately upon docking at Guam.
   - C. No shore leave and no mail distributing and no visitors or stevedores may board until this Immigration inspection is complete. The Inspector will advise Master when he has completed his inspection of passengers and of crew.
4. *Prior to Departure from Guam:*
   - A. Intransit Passengers: pick up from intransit passengers the Form I-94 and hand to Agent before departing from Guam. These must be returned by Agent to U.S. Immigration as passenger departure records.
   - B. Alien crew member joining at Guam pick up from them the Form I-94 which they used to enter the U.S.A. These must be returned to U.S. Immigration by Agent as permanent records.

SECURITY: Guam Government Official usually boards at pier, examines vaccination cards (smallpox vaccination required) and inspects Steward's stores and slop chest. Also represents U.S. Customs. Requires 1 Crew List, 1 Passenger List, 1 Store List, Clearance from last port, later issues new clearance from Guam which Agents bring to ship. Normally does not seal stores or slop chest.

MARINE GUARD: Required when docked at Ammunition Pier, requires Crew List.

U.S. COAST GUARD: Marine Inspection and Shipping Commissioner Services. Requires 1 Crew List. Checks official log book and arrival draft.

FUEL: Mobil Petroleum can supply black oil or truck diesel, but no marine diesel. Requires ship move to their pier, no commercial fuel barge. Unable supply fuel while Ammunition vessel or Bulk Cement vessel working. Possible to supply by truck/trailer to other piers. Navy special (Black Oil) and marine diesel available from Navy on emergency basis only, sufficient to reach next bunkering port. Cash payment required in advance of delivery. Will not normally supply commercial vessels. Navy barge available.

FRESH WATER: Very good, available any quantity, meter service. No water barge.

STORES: No ship chandler, order through Agent. Available but considered expensive. Produce from U.S.A., Milk is recombined in quart cartons, White, Chocolate or Buttermilk. Order milk day prior to delivery. Tropical fruits seldom available. Ice in blocks or cubes. Prices wholesale, except under 1 case lots when at retail. Delivered to ship's gangway or hook.

LAUNDRY: Also dry-cleaning available, U.S.A. prices. 1-day service extra. Delivered to ship's gangway or hook.

MEDICAL: Foreign ships use Guam Memorial Hospital or Catholic Medical Centre or other clinics in town. American ships use U.S. Naval Dispensary in Harbour area, or in emergency U.S. Naval Hospital near Agana, 10 miles distant. Certificates required signed by Master. Patient returns to vessel by taxi at vessel's expense. Dispensary Hours for merchant seamen Monday to Friday 0800-1500 hrs. At other times, if emergency, use the U.S. Navy Hospital. Doctors will not normally visit ships.

Dentists: Private dentists only. Usual hours 0900-1700, Saturday to 1200 hrs.

REPAIRS: Commercial Yard, Dillingham Maritime Services Yard available. Navy Yard, repairs by U.S. Naval Ship Repair Facility (SRF), subject to prior Navy commitments, and requires cash deposit in advance. Payment to be made for work done successfully or not. "No Cure No Pay" does not apply.

TIME: G.M.T. plus 10 hours. When on Daylight Saving Time, G.M.T. plus 11 hours.

POLICE/FIRE/AMBULANCE: Ambulance U.S. Naval Dispensary, Harbour Area, 339-4224/4227; Fire, 22222; Police – Naval Station Security, Harbour Area, 333-2968; Police – Guam Civilian Police, Agana 777-9611

AUTHORITY: Harbour Master, Port Authority of Guam.

NOTES

Please also advise Shipping Guides Ltd.

Martinique

FORT DE FRANCE: 14.36 N. 61.04 W.

(See Plan Book)

PORT LIMITS: The straight lines joining Pointe des Negres, the South extremity of Fort St. Louis and Pointe d'Alet.

DOCUMENTS:

Maritime Declaration of Health.
4 Crew Lists.
2 Provisions Lists.
2 Lists of Passengers in Transit.
5 Lists of Passengers Disembarking.
2 Lists of Crew Personal Effects.
2 Vessel's Particulars Declarations.
2 Cargo Manifests.

PILOTAGE: Call Pilot by International Code flag "G" or by sounding "G" on whistle. Pilot launches are painted black. The Pilot joins vessel on arrival at Pointe des Negres. If Pilot not available, vessel must anchor in the Baie des Flamands East of Point des Negres to await Pilot.

ANCHORAGE: In Baie des Flamands in front of the town. Depths of 10—14 m.

MAX. SIZE: Length 190 m. Draft 10 m. See also "Tankers".

Quay	*Max. Draft*
Quai Quest	7.50 m.
Quai Quest Tableau	6.00 m.
Quai des grands cargos	7.50 m.
Darse	7.00 m.
Annexes	8.00 m. Aft. 6.60 m. Forward
Tableau Tourelles	8.00 m.
Tourelles	9.15 m.
Hydrobase	9.15 m.
Batellerie	4.80 m.
Appontement des Carrieres	15.00 m.

HEALTH: Request free pratique by radio or can be obtained on arrival when Master completes Health Declaration and presents Health Certificates.

RADIO: Fort de France Radio, call sign FFP. ETA message to Agent required 24 hours before arrival on working days or 48 hours on holidays. Message to include number of crew on board.

TUGS: None available.

BERTHING: Alongside quay. Max. depth 10 m. Roll-on/roll-off berth operational.

MEDICAL: Doctor and hospital facilities available.

TANKERS: *Petrol Pier:* depth alongside 17 m., can accommodate tankers up to 65,000 dwt. Crude discharge through 2×12-in. Chiksan Arms, capacity 4,500 t.p.h.

Vessel's displacement is limited by strength of the dolphins.

Refinery Berth: depth alongside 7.50 m. for loading products, fuel, gas oil, kerosine at a rate of 150 t.p.h.

DENSITY: About 1028.

FRESH WATER: Available from quay in unlimited quantity. Rate 50-80 t.p.h.

FUEL: All grades available subject to 12 hours advance notice.

GANGWAY/DECK WATCHMEN: Recommended. Performed by Crew members.

OPENING/CLOSING HATCHES: Can be performed by crew.

CUSTOMS ALLOWANCES: 200 cigarettes per man. All alcohol to be declared.

IDENTIFICATION CARDS: Not necessary.

CONSULS:

Belgium
Colombia
Cuba
Denmark
Germany
Haiti
Italy
Netherlands
Norway
Panama
Portugal
Spain
Sweden
U.S.A.
Venezuela

REPAIRS: Minor repairs possible.

DRY DOCK: 1×200 m. length, 21 m. wide. Equipment restricted.

REPATRIATION: Facilities for crew change and repatriation.

AIRPORT: 7 miles from the port, served by regular airlines.

HOLIDAYS: 1st January, Shrove Tuesday, Ash Wednesday, Easter Monday, 1st May, Ascension Day, Whit Monday, 14th July, 15th August, 1st November, 25th December.

POLICE/FIRE/AMBULANCE: Police, tel.: 17 and 43-06; Fire/ Ambulance, tel. 18 and 22-64.

AUTHORITY: Capitainerie du Port.

NOTES

Please also advise Shipping Guides Ltd.

Mauritania

NOUADHIBOU: (Port Etienne):

POINT CENTRAL: 20.49 N. 17.03 W.

PILOTAGE: Compulsory for vessels calling at Point Central.

An outer pilot station is situated in the vicinity of No. 2 Buoy, bearing 037° distance 4.4 miles from Fairway Buoy No. 0 (position LAT= 20° 40′ N., Long. 17° 04′ 30″ W.). Also see "Shipmaster's Report (1977)".

The inner pilot station is 1 mile from the mineral wharf bearing East.

DOCUMENTS:

3 Crew Lists.
2 Store Lists.
2 Crew Declaration Lists.
2 Passenger Lists (even if "NIL").
2 Ports of Call Lists of the last 30 days.
1 Health Declaration.
1 Vaccination List.

Maritime Gendarmerie: Officers of the Maritime Gendarmerie of Nouadhibou may come on board. They mainly control if the Mauritanian flag (must be flown day and night) is hoisted and check very closely the concordance between the Ship's Articles, the Seamen Books and the Crew List.

If any difference is found between these three documents a fine may be given to the ship.

Immigration/Police: Crew members are not allowed to go ashore without a safe conduct given by the police. The list of the men asking to go ashore has to be given to Agent on arrival.

Money: On principle, the foreign money is not allowed in Mauritania, but Agent may change money into local currency.

No Mauritanian money (Ouguiya) may be kept on board and if the crew have not spent their local money they have to give it back to the Agency (100 Ouguiya about £1; 100 Ouguiya about 1 Fc.).

ANCHORAGE: Ships waiting can anchor N.E. of No. 2 Buoy, distance 1 mile in 20 m. of water, good holding ground. Another anchorage on the roadstead, the wharf bearing N.W./N.N.W. distance 1 mile can be used by ships prior to berthing.

RESTRICTIONS: Minimum depth of water below chart datum is 17 m. in the buoyed channels and swinging area. Outer channel width is 400 m. but it varies from 250 to 400 m. for the inner channel; the radius of the swinging circle being 500 m.

Shipmaster's Report: Daylight sailing only.

MAX. SIZE: Not to exceed 310 m. in length and 47 m. in breadth, the extreme reach of the shiploader arm being 28.5 m. from ship's side. At the limit an extreme breadth of 48 m. could be accepted after advice from the DCFP. If possible drawing should be sent prior to acceptance.

The recommended draft for large vessels in ballast, or partially loaded is 12 m. on arrival. Smaller ships should have on board a quantity of ballast equal to half their cargo capacity.

Maximum freeboard under shiploader arm is 14 m. With hatch covers opening crosswise (abreast) the maximum freeboard must be understood as the height from sea level to the upper part of hatch covers.

On departure a draft of 15.85 m. is usually admitted but 16.15 m. is accepted according to the stage and range of the tide at the time of sailing.

Essential: All vessels greater than 100,000 d.w.t., which have never visited the port before must have prior approval of the DCFP.

HEALTH: Free pratique is usually granted after vessel has berthed. Smallpox and yellow fever vaccination certificates required.

TUGS: None available.

BERTHING:

Mineral Wharf: The ore loading terminal of "Societe Nationale Industrielle & Miniere" de Mauritanie (SNIM) is located at mid distance between the Cap Blanc and Nouadhibou, geographical position: Lat 20° 49′ N., Long. 17° 02′ W. It consists of a platform, 20 m. wide oriented North and South, resting on 8 big dolphins, 13 m. in diameter each and 32 m. distant one from the other. The platform supports a conveyor belt and one single shiploader. The maximum travel of the shiploader from one end of the rails (railway) to the other is 165 m.; the virtual loading capacity would be 5,000 t.p.h. while the actual output varies from 2,000 to 3,000 t.p.h. according to ship's size and on condition there is only one quality and grade of ore to load.

To maintain a depth below LLWT (lowest low water astronomical tides) of 16 m. at the berth, ships are laid against 2 big outrigger pontoons leaning on the dolphins and protected on the ships side by heavy but efficient rubber rollers acting as shock-absorbers.

Ships are generally made fast port side to the quay, coming alongside with the help of the anchors which should be kept at the ready.

TANKERS: *Oil Wharf:* It consists of a light platform placed on top of 3 dolphins of the same diameter as above but 64 m. apart, adjoining the mineral wharf to the Southward. A wooden decking supports the oil pipes which are connected abreast of dolphin No. 10 to the tanker lying portside to the quay, the stern is made fast to a mooring buoy.

DENSITY: Point Central 1026–1027.

FRESH WATER: Not available.

FUEL: Not available at the moment. An oil refinery is being built and production should start in 1978.

MEDICAL: There are hospital and medical facilities at the port.

CUSTOMS: Regulations are very strict, and a careful declaration of all bonded stores must be made before berthing. Ships have been fined for quantities in excess or missing even when small.

GENERAL: (a) Radiotelegrams stating the date and ETA at pilot station and addressed to Snim-Cominor Nouadhibou should be transmitted 72 and 24 hours beforehand via Nouadhibou coast radio station (5 TA) working hours 0800 – 1800 or Dakar (6 VA) hours: continuous.

Shipmaster's Report 1977: Telegrams to Agents through Dakar Radio 6 VA only.

(b) It is of interest to pilots when coming on board, to know whether the ship is powered by a steam-turbine or diesel engine whether the propeller is left or righthand and if it is a variable pitch propeller, how she behaves when the engine is running astern.

GANGWAY/DECK WATCHMEN: Recommended as stowaways try to board at night.

SHIPMASTER'S REPORT: (1975), Vessel 169,000 d.w.t.

Iron Ore Marine Loading Terminal:—

Approach to Cap Blanc and Baie du Levrier: Approach was from the Southward. From Dakar the course was laid to cross the 100 fathom line at 20° 04′ N. 17° 41′ W., this being a precipitous shelf, when crossed with D.F. bearings from the Radio Beacon at Port Etienne gave a reasonable fix. Vessel than steamed across the main flow of North/South traffic at quite a broad angle heading for the landfall buoy 6 miles West by South of Cap Blanc. A dense concentration of fishing vessels extending Westwards from Banc Vilmorin offered little hindrance to our landfall. the light of Cap Blanc lighthouse was visually observed in the pre-dawn darkness at 26 miles and radar contact of Cap Blanc was established at 23 miles. The landfall buoy fitted with a radar reflector, gave radar contact at 15 miles.

Pilotage: A Pilot boards in the vicinity of No. 2 Fairway Buoy from a black-hulled, white superstructure, 40 ft. high-speed motor launch with "Pilote" written on the side. VHF contact is made on Channel 16, working frequency Channel 14. Call "Nouadhibou Pilot". The Pilot, a Frenchman, had a good understanding of English and proved to be very competent. The transit inwards and through the Passe du Levrier was at half speed but the last mile towards the berth only an occasional Dead Slow ahead movement was made to maintain steerage way.

Tide/Currents: Berthing for large vessels is on the ebb tide with a Southerly set of about 1 knot. South of the headland the set is to the Eastwards again about 1 knot i.e. directly across the channel. Unberthing is made on the flood tide setting Northerly along the jetty again about 1 knot. Rise and fall is in the region of 1.6 m.

Wind: Ranges from North by West to North by East (May). During darkness it abated to about Force 3 but from early morning through to sunset gusted up to Force 6 causing a short steep sea to run. The Pilot stated that in August and September Easterly winds often occurred hence the placing of 2 mooring buoys about 1 cable off the berth to assist vessels warping clear when leaving.

Tugs: None available.

Quay: Stout cylindrical rubber fenders are chained to the sides of 2 floating pontoons laying to the quay face. An adequate number of bollards are placed along the length of the quay. 3 dolphins, connected by a catwalk, extend the Southern length of the quayside for ship mooring purposes.

Moorings: When approaching and lying off the jetty 2 motorized mooring boats will run ashore 1 synthetic fibre rope (no wire ropes at this stage) from forward and 1 similar rope from the Poop. Vessel is then to warp alongside with these 2 lines aided by helm and small engine movements. Once alongside a spring from the after extremity of the Poop is to be sent away and a forward spring. Vessel secured to the berth with 1 headline to a mooring buoy North of the jetty, 3 forward breast lines, 1 forward spring, 2 stern lines, 2 after breast lines 1 spring from the Poop, and 1 spring from the normal position on the after deck.

Gangway: The accommodation ladder could not be used because of the space between the pontoons lying between ship's side and the quay. A pilot ladder was the means of access to the after pontoon from which access could be obtained to the quay.

Depths alongside: At the first low water soundings were taken around the ship and when reduced to chart datum — obtained from a monthly tide table loaned by the Pilot – a least depth of 15.6 m. was sounded 45 m. East of the quay about 100 m. South of the quays Northern end. A least depth of 16.2 m. was found on the inboard side with depths generally about 18/19 m. elsewhere.

Draft: Maximum permitted for berthing 12 m. Maximum permitted draft for sailing is 16.16 m. (53 ft.) on high water or 52 ft. at any state of the tide.

Airdraft: Maximum 14.5 m. In our case several thousand tonnes of hold ballast had to be taken once secure alongside, this delayed loading for 5 hours.

Shiploader: This is a single conveyor belt fed gantry having a range of travel of 165 m. along the quay but the loading arm has no facility to slew horizontally. It can only be luffed in the vertical plane. The maximum outreach was stated to be 23 m. which combined with the airdraft limitation of 14.5 m. made it extremely difficult to plumb the centre of the holds. For the majority of our loading period the ship had a port list (this was exaggerated by the free surface effect of the 4 ballasted holds). To keep the loading arm from fouling the ship's structure and assisting the arm to plumb centre all the port side side-rolling hatch lids were only partially opened.

Shifting: This had to be done on 2 occasions but was successfully achieved by hauling on the 2 spring wires aft and 1 headline to warp a distance of 6 m. forward and heaving on the forward spring and stern lines to warp 26 m. aft. The shifting was necessitated by the fact that the distance centre to centre of our extreme loading hatches was 191 m.

Agency: This was conducted by SNIM, Societe Nationale Industrielle & Miniers, their telegraphic address is "Snimport – Nouadhibou".

Documents: Required are:

4 Crew Lists.
2 Store Lists.
2 Crew Declaration Manifests.
2 Vaccination Lists.
3 Passenger Lists.
3 Ports of Call of the Last Month Lists.
2 Ballast Manifests.

The latter 3 lists can be made on 1 sheet of paper (in triplicate). No Maritime Health Declaration was asked for. All these documents were passed to the Agent, no Customs, Port Health, Immigration or Police visited the ship. Although some crew members were without Yellow Fever vaccination certificates this posed no problem, with the Agent, he declared no vaccinations can be done here. Nor can the De-rat Exemption Certificate be renewed.

Port Restrictions: The Agent warned that crew members could not use pounds sterling, U.S. dollars, Dutch guilders or other foreign currency ashore for fear of confiscation by the "authorities". The local currency is the Ouguiya, 100 of which are on par with £1 (approx.).

Port Capacity: The pilot stated previous largest ships had been:
(i) *"Atland"* Obo Swedish 84,229 g.r.t.
(ii)*"Thor"* Bulk German 79,270 g.r.t.
(iii) *"Lilyprima"* Obo Italian 72,68 g.r.t.

However, our claim to be the largest vessel to call being 169,080 d.w.t. is unsubstantiated. The Agent claims a shipment of 139,000 metric tonnes is the largest cargo exported from the port.

Loading Rate: The installation foreman claimed a rate of 4,000 t.p.h. Our rate, allowing for the frequent short stoppages, was 2,813 t.p.h.

Ore: The grade "Siliceous Iron Ore Fines XBF" was extremely dusty. About 10 grades of ore are available from 3 different mines.

Water Density: From our observations at low water 1024 ozs. cu. ft. and at high water 1025 ozs. cu. ft.

Cargo Figures: All tonnages quoted this port are metric tonnes. Ship's figure was about 1,300 tonnes less than the shore quantity, however, the ship's figure was accepted and the foreman stated the shore installations were usually 1% high of the ship figure. Ship was loaded to the maximum draft of 53 ft. but a great deal of difficulty was experienced reading the draft due to the seaway.

Unberthing: This was carried out on the flood tide and only during daylight. Single up to the 2 spring wires aft, using small astern movements and helm movements which aided by the anchor will cant the head from the quay. When the anchor is aweigh, slip the springs and steam ahead of the jetty then using full ahead power and starboard rudder followed by full astern power the vessel is swung well within the turning area to head seawards.

Depths in Channel: Except for the area of the channel abreast Cap Blanc lighthouse where less than 1 m. beneath the keel the remaining parts of the channel showed 3-4 m. underkeel clearance.

Conclusion: It would appear impractical to enter ships of a larger physical size than ourselves at this port because of airdraft/outreach limitations, draft restriction and manoeuvrability problems. Although we were fortunate in having a trouble-free berthing and unberthing procedure serious problems could be foreseen if a vessel had a main engine failure or a sudden deterioration of the weather occurred during these manoeuvres.

Copy of notice received from SNIM Agents Nouadhibou:
To avoid any problem with the Authorities, kindly note the following instructions:

Documents required on arrival:
4 Crew Lists
2 Store Lists
2 Crew Declaration Lists
3 Passengers Lists (even "Nil")
3 Ports of Call Lists of the Last Month
2 Manifests "In Ballast"
1 Health Declaration
2 Vaccination Lists

Customs: The Mauritanian Customs Officers check very closely the provisions on board. Any difference (more or less) may lead to a fine including the confiscation of the excedent goods. Then please give on arrival to your Agent lists of provisions strictly exact.

Maritime Gendarmerie: Officers of the Maritime Gendarmerie of Nouadhibou may come on board. They mainly control if the Mauritanian flag is up and check very closely the concordance between the Ship's Articles, the Seamens' Books and the Crew List. If any difference is found between these 3 documents a fine may be given to the ship.

Immigration/Police: The crew members are not allowed to go ashore without a safe conduct given by the police. The list of the men asking to go ashore has to be given to your Agent on arrival.

Money: On principle, foreign money is not allowed in Mauritania, but your Agent may change your money into local currency. Non-Mauritanian money (Ouguiya) may be kept on board and if crew has not spent the total of their local money they have to give it back to the Agency (100 Ouguiya = £1) (10 Ouguiya = 1 Fc.)

SHIPMASTER'S REPORT: (1977). The landfall buoy 6 miles West-by-South from Cape Blanco does not exist. Buoy No. 0 approx. position 20° 40′ N., 17° 04.7′ W. has been removed.

SHIPMASTER'S REPORT: (June 1978). The following is a brief account of the port which is in addition to the information supplied in the "Guide", which may be read as being correct. The port, formerly Port Etienne, is in Mauritania, I found travellers are afforded every courtesy. There are two flights per week from Paris via Air Africa who are very good. The flights arriving here on Tuesday and Thursday. The plane returning from Dakar Wednesday and Friday. Spare parts can be landed here and taken out to the ship with minimum of Customs formalities though it would prove to be an expensive exercise. It must also be pointed out that it is not always possible for the plane to land here due to high cross winds and resultant sand storms at the runway, in which case the plane then proceeds to Dakar direct.

Custom Authorities are most interested in the amount of foreign currency brought in as there is a strict levy on this, care must be exercised in this respect. They are also most interested in the stores on board the ship and these must be strictly accounted for precisely.

The town itself of which I did not visit is a separate community from the mining town itself. The mining town itself is self-sufficient and both French and Mauritanians live here. There is a hotel, which is practical and clean with reasonable food. There is also a club with tennis courts, a post office, power station and cinema and a hospital where major surgery can be carried out. There is also an oil refinery which is uncompleted. Refined products are imported via a modern berth. Bunkers and fresh water are available here but in limited quantities and I would imagine costly.

There are no tugs. According to the Agent wireless telegraphy may be used alongside the berth although there is a Telex ashore. I found the Agent to be most helpful.

I was assured that seamen joining or leaving here do not require a visa only a passport and discharge book are required, of which I personally was never asked to produce.

The iron ore mine is approximately 650 miles from the loading berth, all the ore coming by rail and attacks are frequent by bandits and guerillas. This can cause lengthy delays to the ship as very little ore is stockpiled.

Loading is carried out by one loading arm which pours approximately 4,000 tonnes per hour. Weights loaded can be measured ashore and have proved to be quite accurate, however it is normally the practice to accept the ship's figures.

AUTHORITY: Societe Nationale Industrielle et Miniere (SNIM).

NOUADHIBOU HARBOUR: 20.54 N. 17.03 W.

LOCATION: Position of Trading Port 20° 53′ 48″ N., 17° 03′ 10″ W.

PILOTAGE: Not compulsory, effected by SNIM/Cominor. Pilotage not available at night.

RESTRICTIONS: Depth of buoyed Channel 24 ft. Anchorage strictly prohibited in the Channel.

TUGS: One tug, 150 h.p.

BERTHING: Pier of 115 m. length connected to shore by a 150 m. long bridge.

Outside general berth for ships with a 24 ft. draft and a 160 m. max. length. According to certain vessel's accommodations, the extreme hatches cannot be discharged through quayside.

Inside berth for ships with a 15 ft. max. draft and a 80 m. max. length.

The maximum payload authorised on the bridge connecting the pier to the warehouses and the storage areas being limited to 10 tons, all heavy lifts over 10 tons are to be compulsorily discharged on lighters.

Lighterage Piers: Southern quay = length 80 m; depth 10 ft. Western quay = 150 m; depth 10 ft.

The Southern quay is connected to SNIM/Cominor railroad network, allowing the loading of heavy lifts on railcars.

2 covered sheds: totally 3,500 sq.m.

1 area with macadamized roads offering 30,000 sq.m. of storage connected to SNIM/Cominor railroad system.

Lighterage: Compulsory for any ship whose characteristics do not allow a safe berth.

Compulsory for any loading or unloading of heavy lift over 10 tons

Not compulsory in case berths are occupied and if manpower and equipment are still available.

STEVEDORES:

Working Hours. Normal hours: from 0800 to 1200 and 1400 to 1800 on Monday to Friday.
From 0800 to 1200 on Saturday
Overtime: from 0700 to 0800 hrs., 1200 to 1400 hrs. and 1800 to 2000 hrs. on Monday to Friday.
From 1200 to 2000 hrs. on Saturday
From 0800 to 2000 hrs. on Sunday and holidays.

Night work after 2000 hrs. is not normally foreseen during Ramadan period, during this period, the work stops at 1800 hrs.

There is no work on the following holidays: New Year's Day (Jan. 1); Tabaski (El Aid) (variable date); El Mouloud (variable date); Labour Day (May 1); Africa Liberation Day (May 25); Korite (El Fatar) (variable date); Independence Day (Nov. 28); Christmas (Dec. 25); 1st Moharam (variable date).

The holidays corresponding to the Islamic holidays are calculated from Arabic calendar.

FRESH WATER: Only available for small vessels.

FUEL: Only available for small vessels.

GENERAL: *Winds* mainly N./N.E. in the morning N./N.W. in the evening. Wind force: variable from August to January rather strong from February to July. Tidal current running North during Flood, and South during Ebb (1.5 to 2.5 knots).

Swell 0.80 m. max. Strong surge alongside all berths.

Rise and Fall High water 2.35 m. Low water 0.35 m. difference = 2 m.

NOUAKCHOTT: 18.02 N. 16.02 W.

LOCATION: Nouakchott Wharf is situated in position 18° 02′ 08″ N., 16° 01′ 43″ W., being about 7 km. S.S.W. of Nouakchott.

All vessels anchor off the port and movement of cargo is undertaken by barges and lighters.

WIND: The direction of the wind varies from N.N.W. -N.E. The predominant winds affecting navigation are from the N.N.W.

The rapid onset of bad weather should be noted. When conditions are bad vessels should weigh anchor and proceed seaward as the coast offers no natural shelter.

CURRENTS: There is an almost permanent N.-S. current running at about 0.5 knot; it reverses S.-N. on a few days during the year.

SWELL: 2 kinds of swell have been observed: Local swell due to the coastal winds, varying from N. to N.W. in dry weather, and turning between N.W. and S.W. during the wet season.

ANCHORING ROADS CONDITIONS: The periods during which climatic conditions are liable to upset work are as follows: Strong swell, January/March; rain, July/August/September.

This virtually allows the port to be used during 200 days in the year.

WORKING CONDITIONS: Vessels must locate themselves as closely as possible, where they can anchor without risk, to the wharf, within the limits of their drafts (generally between 0.5 and a 0.25 miles), in line. At the lighterage quay there is a depth of water of 7 m.-8.5 m. It is preferable for a ring of lines to be placed in advance around the sides of the vessel to which barges may tie up.

Experience shows that the tonnage unloaded currently by the wharf is 400 to 500 t.p.d. where goods in sacks are concerned. It is possible to work 2 vessels at once, but each 4 will only work half of this tonnage.

Work is currently carried out on board by private companies, and on land, in the launches and lighters by the Wharf Organisation personnel.

As far as wharf personnel are concerned, during working days, the normal working hours are from 0800 to 1600 hrs.

Overtime day hours are from 1600 to 1900 hrs.

Night time working is considered to apply between the hours of 1900 and 0600 hrs. (currently impossible).

It should be noted that there is an overtime hour at the beginning and end of work, which is the time required to launch or bring barges on to the landing-stage.

RECOMMENDATIONS TO CAPTAINS OF VESSELS: Vessels must be at all times capable of gaining the open sea rapidly, since bad weather comes up very quickly, and the coast affords no natural protection.

WHARF: The working platform is 86 m.×21 m. and lies in a N.W.-S.E. direction; it is connected to the shore by a gangway 246.5 m. length and 7 m. wide.

The wharf is designed to take a load of 2 lorries of 25 tons (2 axles of 10 tons and 1 axle of 5 tons) or an overload of 1 ton/sq. m.

The wharf manager's office together with Police, Customs and radio office are located on the shore.

WHARF EQUIPMENT: 3 cranes with capacities of 20, 8 and 5 tons respectively.

FLOATING EQUIPMENT: 1 launch of 50 hp, 2 launches of 100 h.p. 10 steel barges, internal dimensions 10 m. × 3 m. × 1.25 m. with capacity for 20 tons cargo. 1 steel barge, internal dimensions 13 m. × 4 m. × 1.35 m. with capacity for 30 tons cargo.

LAND EQUIPMENT: Goods are transported from the wharf to the storage area by 18 trailers each with a capacity of 8 tons. The port is also equipped with 2 tractors of 80 h.p. and 5 fork-lift trucks with capacity of 3.5 tons.

TANKERS: Dakar oil companies are presently building a hydrocarbon oil depot about 400 m. North of the wharf.

The depot will be fed from tankers by means of 2 sea-lines of 900 m. length.

SHIPMASTERS REPORT: August 1978.

The following is to be read in conjunction with the information above.

Currents: Reversal of current is unpredictable and may last for several days on each occasion.

Anchoring Roads Conditions: While in the main the holding ground is good, there appears to be patches of hard sand where the anchor cannot take hold.

Working conditions: It is practical to work 4 vessels at once plus one of up to 5,000 tons d.w.t. at the new extension to the pier.

Present (August 1978) hours for ships at anchor are 0800 to 1600 hrs. (Ramadan) but Sunday overtime can be worked if vessel gives authority. It seems that this is very expensive as so many are involved.

At the pier extension work has been observed from 0800 to 2400 hrs. and a mobile crane is available there to assist ship's gear.

Wharf Equipment: There are 7 cranes with various capacities, two being used for lifting out barges for repairs and to house the tug launches at night. The mobile crane is backed up by some 8 small fixed jib carriers.

Tankers: The sea berth North of the pier is in operation.

Documentation: See "Nouadhibou".

Customs Control: The officer will not board until the Agent has entered the vessel with the necessary documents, hence there will always be a time interval between arrival and being boarded for inspection. So financial loss must be expected accordingly.

General Observations: Due to the lack of any VHF or similar communication system, it is difficult to assess the true performance of this port. It is most uncomfortable for any vessel of more than 7,500 tons d.w.t. unless the barges are prepared to come out to 7 or more cables from the pier. In the recommended anchorage the effect of swell and surf is such that the vessel frequently swings through a wide arc and the chances of breaking out the anchor are very real. The erratic current direction may also swing the ship towards the pier hence the above opinion. Other vessels may also anchor so as to swing across one's own cable and anchor.

NOTES

Please also advise Shipping Guides Ltd.

Mauritius

PORT LOUIS: 20.09 S. 57.30 E. (See Plan Book)

PORT LIMITS: The commercial area of the port is the area inside the port bounded by the entrance buoys and the shore line of the inner harbour. Vessels at the outside anchorage lie within the limits of the port defined by an imaginary line joining Pointe Aux Sables and Pointe aux Pimentes. In this area commercial activities are restricted to bunkering, ship repair and the landing of passengers or personnel.

PILOTAGE: Compulsory for vessels over 100 tons register. Vessels are piloted inwards and outwards at any time of the day or night if circumstances permit. Inward bound vessels are met about a mile seaward of the Entrance buoys though they may, in some circumstances have to be boarded at a greater distance offshore.

ANCHORAGE: Open roadstead with anchorages for vessels of any draft. Admiralty Chart No. 713 refers.

MAX. SIZE: Harbour entrance depths from 42 ft. to 119 ft. Channel – dredged to 40 ft.

RADIO: The Port Master requires to be notified of the date of the vessel's arrival, the length and draft and purpose of call, by radio as soon as it is possible for Master to communicate with Harbour either:

1. By CW transmission through the Government Radio Station (3 BA) at Vacoas on 500 kc/s.
2. By R/T transmission through Port Louis Harbour Radio Station (3 BB 3) on 2182 kc/s.

VHF: Port Louis Harbour Radio Station is equipped with VHF and maintains 24-hour watch on Channel 16.

TUGS: 2×830 h.p. diesel-engine tugs, *Betty Des Mascareignes* and *Winnie Des Mascareignes.* These tugs are available for deep-sea towage and salvage and are fitted with fire-fighting equipment, R/T and VHF. 3 smaller tugs of 320 h.p are also available for harbour work and fitted with VHF.

BERTHING:

Quay D, length 485 ft., depth alongside 31 ft. 06 in. Can take 1 vessel up to 600 ft. overall, draft 30 ft. 06 in.

West Quay, length 400 ft., depth alongside 38 ft., designed for white oil and fertiliser discharge.

Quay C, length 396 ft., depth 18 ft. alongside for a length of 310 ft. Can take 1 vessel up to 300 ft. length, and 17 ft. draft.

Buoys: 7 berths capable of taking ships up to 36 ft. max draft; 4 berths capable of taking ships up to 25 ft. max. draft; 1 berth capable of taking ships up to 19 ft. max. draft; 3 berths capable of taking ships up to 20 ft. max. draft, max. length 350 ft.; 2 berths capable of taking ships up to 16 ft. max. draft; max. length 225 ft. Vessels of 36 ft. are berthed in Quarantine Berth in No. 4E, No. 2E, No. 2W, and No. 5W. Distance between buoys at entrance 1.5 cables.

SPECIALISED CARGO-HANDLING FACILITIES: LPG carriers berth at Quay D; there are no full containerisation facilities. Containers are handled by ships gear at West Quay, where Roll-on/Roll-off vessels are also handled.

Bulk Cargo: Cement Discharging facilities. Rate of discharge 500 t.p.h. Max. draft 34 ft., max. length 592 ft.; capacity of Silo; 18,500 metric tons.

STEVEDORING: Undertaken by private contractors. Approximate rate of loading per day of 8 hours: Sugar in bags, 200 tons per gang per day; sugar in bulk, 200 tons per gang per day; general cargo, 60 tons per gang per day; rum in drums, 100 tons per gang per day; bales hemp, 100 tons per gang per day.

Working hours: Monday to Fridays from 0700 to 1500 hrs., Saturdays from 0700 to 1300 hrs. Overtime can be carried out on weekdays up to midnight and up to 1600 hrs. on Sundays and public holidays.

MEDICAL: Arrangements for medical attendance should be made through ship's Agent. Private clinics available.

FRESH WATER: Fresh water supplied by barges at any berth between 0700 and 1600 hrs. Arrangements can be made for supply before 0700 and after 1600 hrs. on payment of overtime. The rate is about 25–30 t.ph. 4 barges of 50, 75, 85 and 110 tons respectively are available.

FUEL: Gas oil, marine diesel and furnace oil obtainable. (Arrangements must be made in advance between Owners and the Shell Co., BP, or the Anglo-Iranian Oil Co.) The pumping capacity of the installations at Port Louis for furnace oil is between 150 and 200 t.p.h., and for marine diesel oil and gas oil 50 t.p.h. Marine diesel oil and furnace oil (35 secs. to 1,000 secs.) is supplied at Quay "D". Furnace oil 1,000 seconds only is supplied on No. 5 West berth.

A 400-ton bunkering barge available to supply vessels in harbour and outside anchorage.

DEVELOPMENTS: The overall port development project comprised the construction of 3 deepwater quays, mooring dolphin, transit sheds, administrative and workshop buildings, quay and storage facilities for bulk sugar operations. The first new quay has already been completed and construction of the other quays and sheds is in progress. The preliminary works for the construction of the Bulk Sugar Terminal have also started.

REPAIRS: Almost any type of repair can be undertaken in Port Louis.

DRY DOCK: Stevenson dry dock. Largest vessel that can be docked: 326 ft.×48 ft., with a max. draft of 16 ft.; vessels of up to 358.5 ft.×50 ft. can also be docked, but at least 15 days notice should be given.

CONSULS: *Consulates:* Belgian, Danish, Dutch, Finnish, German (Federal Republic), Norwegian, Portuguese, Spanish and Swedish. *Embassies:* French, Malagasy, American, Russian and Pakistan. *High Commission:* British and Indian.

HOLIDAYS: 1st January (New Year's Day), 22nd January (Cavadee); 6th February (Chinese Spring Festival); 18th February (Id-El-Adha); 6th March (Maha Shivaratree); 12th March (Independence Day); 1st May (Labour Day); 29th October (Divali); 1st November (All Saints' Day); 1st December (Id-El-Fitr); 25th December (Christmas Day).

POLICE/FIRE: Police, tel. 999; Fire, tel. 999.

TIME: Local time GMT plus 4 hours.

AUTHORITY: Mauritius Marine Authority.

NOTES

Please also advise Shipping Guides Ltd.

Mexico

ACAPULCO: 16.50 N. 100.00 W.

DOCUMENTS:

Health Clearance from previous port.
Health Pratique.
4 Stores Lists.
4 Lists of Crew's Personal Effects.
12 Crew Lists.*
2 Passenger Lists.*
12 Manifests of cargo for the port.*

*One copy to be visaed by Mexican consul..

PILOTAGE: Pilot is ordered by Agent on the basis of Master's ETA, which should be given accurately at least 24 hrs. before arrival. Pilot boards at the port limits, approx. 1 mile from the entrance.

ANCHORAGE: Vessels may anchor in the middle of the bay as indicated by the Pilot. Depths up to 150 ft.

RESTRICTIONS: The Bay of Acapulco is a natural harbour surrounded by mountains, approx. 4 miles across at its widest part and 2.5 miles across at its narrowest. There are 2 entrances, 1 called Boca Grande and the other called Boca Chica.

Boca Grande is between Punta Siclata on Isla de la Roqueta and Punta Bruja. The channel is 3,000 m. wide with a depth of 31 fathoms in mid-channel.

Boca Chica Channel, between Isla de la Roqueta and the Peninsula of Las Playas is 300 m. wide with a depth of 14 fathoms in mid-channel.

MAX. SIZE: For berthing alongside max. draft 28ft. 6in.

HEALTH: When vessel arrives at the port the following Authorities will board: Port Health Authority, Customs and Immigration, accompanied by the ship's Agent.

RADIO: Coastal station of Acapulco receiving on 8374 kHz in daytime and on 4180 kHz at night. Transmitting on 8514 kHz in daytime and 4250 kHz at night. Radiotelephone receiving and transmitting on 2715 kHz during the day and on 2182 kHz from 2000-0600 hrs. local time. VHF service available from 0630 to 2300 hrs.

TUGS: 1 tug is required for berthing. Tug's line used.

MEDICAL: Agent should be advised by radio in advance if any medical assistance required. Hospital facilities available.

TANKERS: Tanker moorings operated by Petroleos Mexicanos situated on the Eastern side of the bay. It is strictly prohibited to discharge oily residues in the bay or within 40 miles of the port.

FRESH WATER: Can be supplied by hoses from the quays, rate about 15 t.p.h.

OPENING/CLOSING HATCHES: Is performed by stevedores.

CUSTOMS ALLOWANCES: Crew members are only allowed to retain cigarettes, tobacco and liquor sufficient for their own consumption while vessel is in port.

IDENTIFICATION CARDS: Crew members should carry a passport.

CONSULS:

Denmark	Tel. 2.11.11	Italy	Tel. 2.25.10
France	" 2.43.83	Norway	" 2.19.56
Great Britain	" 2.29.21		

REPAIRS: Minor engine repairs can be effected. No dry docks, only a slipway for vessels up to 100 tons.

REPATRIATION: Can be arranged.

AIRPORT: International Airport situated 22 km. from the port, daily flights to all parts of the world.

TIME: GMT minus 6 hrs. all through the year.

HOLIDAYS: The following holidays can only be worked in case of emergency: 1st January; 5th February; 21st March; 1st Mas; 5th May; 16th September; 12th October; 25th December; and in addition 23rd May, Anniversary of the Stevedores' Union.

POLICE/FIRE/AMBULANCE: Police tel. 2.00.40; Fire 2.00.42; Ambulance (Red Cross) 2.02.41. and/or 2.00.88.

TELEPHONES: Cannot be connected on board the ship but Master may make calls from the quay.

SHORE LEAVE: Allowed.

AUTHORITY: Capitania de Puerto.

AGENT: Representaciones Maritimas, S.A. c/o Ricardo Careaga E Hijos, S. De R. L., C.M. Aleman No. 187-31 3er Piso, P.O. Box 256. Acapulco, Gro. Mexico. Tel.: 2 23 35. Telex 017 516 Cables: "Maritimex".

COATZACOALCOS: 18.08 N. 94.25 W.

PORT LIMITS: From the centre of the channel at the bar with a radius of 0.5 mile to seaward.

DOCUMENTS:

Customs:

Cargo manifest, original and 4 copies visaed by Mexican Consul at place of origin. If no cargo carried for this port a certificate and 2 copies stating the fact.
Stores List, original and 1 copy.
Personal Effects List, original and 1 copy if vessel is arriving from another Mexican port. Customs release from that port must be produced.

Port Captain:

Clearance from last port.
2 copies Crew List.
3 copies Manifest of cargo for this port.

Immigration:

Crew List, original and 1 copy, bearing consular visa.
Passenger List, original and copy, visaed by consul.
All Crew Passports or I.D. Cards.

Health:

2 copies Crew List.
2 copies Passenger List.
Crew Vaccination Certificates.
Derat Certificate.
When vessels are anchored beyond the breakwater authorities board from the pilot launch.

The following must be made available for inspection.

Registration Certificate of Vessel.
Certificate of Inspection of Deck Machinery.
Certificate of Inspection of Machinery.
Freeboard Certificate.
Tonnage Certificate.
Radio Certificate.
Radio-telephony Certificate.
Emergency Procedure in the Case of Abandoning Ship.
Emergency Procedure in the Event of Fire.
Vessel Insurance Policy.
Copy of the Charter Party (where applicable).

PILOTAGE: Compulsory. Pilot meets vessel off the jetties at Coatzacoalcos Estuary. Master should give Agent information not less than 24 hours prior arrival stating vessels name, flag, and ETA as well as draft.

Pilot boat black hull, white housing and red deck. 2 launches *Alcion* and *Vencedora*. The sound signal for calling the Pilot is 2 long blasts and 1 short blast. The light signal is a blue Bengal light.

There is a new cutter *Siriux*. The pilots' office has VHF radio station, listening out on Channel 16.

ANCHORAGE: Vessels may anchor between 0.5 mile and 1.5 miles off the breakwater or at the Master's discretion.

MAX. SIZE: Max. draft crossing the bar is 37 ft. The Pajaritos Channel to the bar reaches 42 ft. (will shortly be 45 ft.)

Free Zone: Max. length during the day 200 m., at night 125 m. Max. draft. 31 ft.

Pajaritos: Max. length 225 m. Max. draft 37 ft.

HEALTH: Pratique never given by radio. Vessels granted free pratique when berthed alongside if no contagious illnesses aboard.

RADIO: Telegraphic transmitter type TH 600-M with an open sea range of 500 miles radius, frequencies of 512, 500, 432, and 419.5 kc/s. Telephonic transmitter type TSB-500-Be with approx. range of 500 km., frequencies of 2.182, 2.270, 2.542 and 2.665 kc/s. RDF transmitter type TT-1017-B with approx. range of 300 miles, frequency 312 kc/s. Transmitter/Receiver for radiotelephony VHF type VFD-50PT/PR, with approx. range of 50 miles, frequencies in Simplex operation: Channel 12-156.6 mc/s and Channel 16. International call-up 156.8 mc/s. Duplex operation: Channel 26. Transmission 161.9 mc/s and reception 157.30 mc/s Channel 27. Transmission 161.95 mc/s and receiving channel 157.35 mc/s. At the moment, there is a point to point link-up with national and coastal telegraphs, as well as teleprinters for national and international service No. 078-835 (the latter is said already to be installed and will shortly be operating normally).

TUGS: The Free Zone has the "Servicios Portuarios del Istmo de Tehuantepec S.A de C.V., owners of the tugs *Quetzalcoatl* 2,400 h.p., *Olmeca* 1,600 h.p. and *P.L.M.8* with 600 h.p. for operations in the Free Zone and the Pajaritos Terminal, the first being able to undertake salvaging work due to extensive range of action.

A tug is obligatory for mooring, unmooring or changing position in the port roads. 1 tug for vessels of 2,500 g.r.t. and 2 tugs for vessels larger than 4,000 g.r.t. The signal for calling up tugs is 2 long and 2 short blasts on the vessel's siren. The signal for the tug to withdraw is 1 short, 1 long and 3 short. The tug will repeat the signal to indicate that it has been heard. Tugs are fitted with VHF radio listening out on Channel 16 and during working on the channel which the tug captain is ordered to use.

BERTHING: *Free zone:* This has a quay length of 1,900 m. (1, 2, 3, 4, 5, 6, 7, 8,) with varying depths of water from 29 to 31 ft. All necessary services for vessels are available. During the day, vessels up to 200 m. overall length can manoeuvre, and at night only vessels up to a max. length of 125 m.

Restrictions: Night service is suspended during times of strong currents in the Coatzacoalcos river.

Pajaritos Terminal: In this terminal PEMEX has 3 quays operating and 1 being constructed, those operating being PX1E and PX1W with operational depth of 33 ft. and 30,000 tons gross with lengths of 200 m. PX2E and PX2W with operational depths on the Eastern side of 33 ft. and with 37 ft. on the Western side, admits vessels of 225 m. overall length and 35,000 g.r.t. The Provisional Quay admits vessels with 37 ft. draft. and 35,000 g.r.t. At this terminal, Pemex exports crude oils, fuel oils, and at the PX1E quay ethylene is loaded specifically. In the Western part of the lagoon, there is a manoeuvring basin with a radius of 300 m.

F.F.M. Quay: In the Eastern part of the Lagoon of Pajaritos, the Empresa Fertilizantes Fosfatados Mexicanos S.A. have their plants and a quay of 425 m., running E. — W., this quay being used for discharge of phosphoric rock in 4 mobile hoppers. Also, liquid sulphur is discharged, phosphoric acid is loaded, as are sulphuric acid and superphosphates. It has an operational draft of 33 ft., and takes vessels of 35,000 g.r.t.

STEVEDORES: No ETA advice necessary. Free Port: Straight working hours: from 0800 to 1200 and from 1400 to 1800 hrs. Overtime 100% overcharged according Tariffs. Latest times to order gangs: 0730, 1330 and 1730 hrs. Straight time above hours Monday through Saturday. Sunday and holidays allowed to work except "Legal Holidays". Loading and discharging rates: 25 tons gang/hour using ship's derricks. No shore cranes available. Loading sulphur by conveyor belts at 500 t.p.h., working around the clock.

Private FFM Berth: Loading or discharging operations performed by their own personnel working 24 hours per day. Rate of loading by conveyor belt: 500 t.p.h. Rate of discharging 1,100 tons per day with ships gear.

MEDICAL: Hospital facilities available. Inform Agent in advance if treatment required. Smallpox vaccination certificates inspected on arrival. If certificates expired crew members are re-vaccinated at Health Department.

TANKERS: Also see "Berthing". Tankers regularly moor in the Pajaritos Roads. There are 4 large quays for mooring 7 vessels up to 233 m., with max. draft at the quay of 33 ft.

The provisional Quay has 2 lines of operation of 24 in. with 3 points 8 in. for crude oil and 1 other of 8 in. for crude oil.

DENSITY: Averages 1012.

FRESH WATER: Available at berths in Free Port area, delivered by 1.5 in. hose. Loading rate about 8 t.p.h.

FUEL: Fuel can be supplied at Coatzacoalcos port by tank-trucks when vessels need small quantities. Petroleos Mexicanos (PEMEX) has at Nanchital a loading terminal which is about 3 miles up-river from Coatzacoalcos (max. draft 27 ft. 6 in.) where Bunker C fuel available.

Diesel oil only available at Minatitlan, about 17.5 miles up-river from Coatzacoalcos (max. draft 21 ft.). If vessel bunkers at Nanchital or Minatitlan there will be at least 1 day delay and heavy extra expenses.

Gas freeing equipment for Gas tanker at Nanchital.

DEVELOPMENTS: The entrance channel up to Pajaritos roads has been dredged up to 42 ft. The quays in the Free Zone have been completely reinforced, vessels up to 31 ft. draft being able to come alongside. The warehouses for general cargo at quays 2 and 3 have been completed, with a covered area of 4,000 m. and normal loading capacity of 10,000 cu. m. There are sufficient open areas for positioning heavy loads or machinery. Apart from the lighthouse on the Gavilan Hill, in the Allende area (left bank), the port has light towers indicating the main entrance channel, another 2 to indicate the channel leading to Pajaritos roads. All 4 have flashing lights. The branch leading onwards to the Free Zone is indicated by a small tower with flashing white light. The lights of the promontories of the 2 headlands;— the East light is green, and the West light is red. The channel is marked with black coloured buoys with odd numbers, on the port side entering, and red with even numbers on the starboard side. Both sets of lights are of the flashing type. When continuing upstream towards Nanchital or Minatitlan, the bridge has to be passed under. Its characteristics are: Length 1,375 m. vertical clearance with the bridge up 35 m., with the bridge down 8.84 m. Horizontal clearance which can be used: 60 m. To have the bridge raised, vessels must give 3 long and 2 short blasts on the siren.

CUSTOMS ALLOWANCES: No restriction for free use on board.

CONSULS: Norway and Netherlands.

REPAIRS: Minor repairs may be effected. No dry dock available.

AIRPORT: At Minatitlan, about 40 minutes car drive away. 2 regular flights to Mexico City.

TIME: 6 hours behind GMT.

HOLIDAYS: No work performed on following legal holidays: January 1st; March 21st; May 1st; May 5th; September 16th; October 12th; November 20th; December 25th; and December 1st every six years when Federal Government changes President.

TELEPHONES: No facilities for placing telephones on ships.

POLICE/AMBULANCE/HOSPITAL: Police tel. 2 01 22, Red Cross 2 02 85; Hospital 2 00 30.

SHORE LEAVE: Possible. Crew must have I.D. cards or passports Passengers must have passports.

AUTHORITY: Port Captain.

AGENT: Representaciones Maritimas, S.A. Calle Juarez 320 Altos Coatzacoalcos, Ver. Tel. 2 01 71. Telex 078 822. Cable: "Maritimex", Coatzacoalcos.

LAZARO CARDENAS: 17.59 N. 102.10 W.

(See Plan Book)

PORT LIMITS: Area within limits of anchoring described below. For "Arrived Ship". Pilotage limits 1 mile off to seaward from breakwaters.

DOCUMENTS:

- 7 Crew Lists
- 2 Vaccination Lists
- 1 Sanitary Health Declaration
- 3 Stores Lists
- 2 Personal Effects Lists
- Clearance From Last Port
- Voyage Memorandum, showing also Ships Registry
- Derratisation Certificate and Cargo Gear Certificate regarding cargo
- 5 Cargo Manifests
- 5 Bills of Lading.

PILOTAGE: 24 hours advance notice through coastal station, addressed to "Puerto" Lazaro Cardenas, Mich. A VHF watch on Channel 16 is maintained Monday to Friday, 0800 to 1900 hrs. and at any time previously requested by ship's Agent. VHF range 45 miles. Pilot will board normally either 1 mile off the breakwater or at the anchorage, and at Master's request further out if required. In the event of heavy sea, vessel will be instructed accordingly via VHF.

ANCHORAGE: Imaginary circle 1 mile in diameter whose centre is located 1.5 mile South of breakwater with depths ranging from 8 fathoms on the North edge of circle to 20 fathoms on the South. Very good holding ground, care should be taken not to anchor on, or near leading line (304°) due to a submarine canyon with over 100 fathoms depths at 1 mile off the breakwater.

RESTRICTIONS: Vessels up to 200 m. LOA and up to 35 ft. salt water draft may enter or leave the port 24 hours a day, larger vessels or those with deeper draft only with daylight. Vessels with over 42 ft. salt water draft must wait for tide.

HEALTH: Port Health Officer will normally board vessel along with Pilot, pratique can also be granted by VHF radio. Automatic pratique is granted when coming from another Mexican port.

RADIO: Radio Maritima Manzanillo "XFM" and Radio Maritima Mazatlan "XMA" are recommended coastal stations through which to route ETA's. Initial contact on 2182 kHz.

VHF: At port, 25 watt 45 mile range. Channels 6, 16, 26, 11, 12, 13 and 69. Initial contact to be made on Channel 16, manoeuvring on Channel 6, port operations on Channels 11, 12 and 13.

RADAR: No radar service available.

TUGS: 1 tug stationed permanently at port 1,900 h.p. twin-screw. Tug's lines used, no charge for lines. Vessels over 50,000 tons displacement should apply to Manzanillo for other tug through Agent. A second tug is scheduled to be available early 1979.

BERTHING: The quay of "Metales Y Minerales" is the only one in service, 650 m. (2,132 ft.) of usable berthing length with depth alongside from 45 ft. to 47 ft. salt water. Shore cranes and sometimes ship's gear used for steel products. Significant cargoes are coal in bulk, coke-breeze, pig iron and finished steel products, also fuel oil.

BULK CARGO FACILITIES: Berth No. 2 of quay mentioned above has a shore crane clam-bucket type 250 t.p.h. capacity capable of loading and unloading. Depth alongside 45 ft. salt water. Clearance from boom to MLLW 35 m.

CRANES: In addition to the crane on berth No. 1 a container crane 40 tons lifting capacity is available. Clearance from boom to MLLW, 31.2 m. also 3×75 ton movable cranes (self-powered) can work anywhere on quay, 2 additional mobile cranes of 20 ton capacity are available.

SPECIALISED CARGO HANDLING FACILITIES: Berth No. 1 can handle containers and heavy lifts up to 40 tons. Berth No. 2 can handle bulk and ores.

BRIDGES: No bridges.

STEVEDORES: Agents will arrange for stevedores upon receipt of ETA.

MEDICAL: Advance notice required by Agents when medical assistance required, emergencies can be routed via VHF at pilot station (Channel 16). 2 hospitals and 2 clinics with a total of 40 beds available plus a new hospital scheduled late 1978 with 50 bed capacity will accept seamen. Smallpox vaccination required, yellow fever and cholera vaccination desirable.

TANKERS: All berths have 10 in. diameter lines to discharge fuel-oil.

DENSITY: Highly variable, can range from 1024 in dry season to 1012 in rainy season.

FRESH WATER: Available. 3 in. pipe on all piers (American standard thread), but is recommended to boil it, for drinking purposes.

FUEL: No fuel available for vessels, only diesel of specific gravity 0.85 available in trucks.

FIRE PRECAUTIONS: Tankers should fit a good ground connection to quay and have 2 lines hanging fore and aft ready for emergency towing.

CONSULS: No consuls available at present.

REPAIRS: Small and medium size repairs can be done at the workshop of the steel works if previous advice sent to Agent.

DRY DOCKS: No dry docks available.

SURVEYORS: One independent surveyor available for draft surveys, on/off hire and damage, can be contacted through Agents.

GANGWAY/DECK WATCHMEN: Neither necessary nor recommended.

HATCHES: Normally done by crew members, can be done by stevedores at ship's request.

CUSTOM ALLOWANCES: There are no regulations. It is according to the Master's judgement for his needs for the stay in the port.

CARGO GEAR: Normally done with ship's gear but shore cranes are available upon request. Heavy lift cranes up to 40 tons.

REPATRIATION: All facilities for crew changes.

AIRPORT: Zihuatanejo Airport, nearest 135 kms. 5 daily flights to Mexico City with connections to all parts of the world.

TIME: GMT minus 6 hours.

HOLIDAYS: 1st January, 5th February, 21st March, 1st May, 16th September, 20th November, 25th December, 1st December. (Every 6 years when there is President change.)

POLICE/AMBULANCE/FIRE: Police 2-0154, Ambulance 2-05-75, Fire 2-03-33 ext. 1020 and 1000

TELEPHONE: No shore connection available.

SERVICES: Only ship chandler and laundry.

SHORE LEAVE: Crew members allowed shore leave, without any special permit.
IDENTIFICATION CARDS: Seaman's book is sufficient.
REGULATIONS: No special regulations.
DELAYS: No delays expected.
DEVELOPMENTS: General cargo berth, completion scheduled for mid 1979, 150 m. long., 12 m. depth. Phosphoric rock terminal, completion scheduled early 1980, 300 m. long, 14 m. depth. Grain terminal completion scheduled late 1979, 280 m. long, 14 m. depth.
GENERAL: Salinity in basin and docks always changing and subject to tides and river flow, recommend taking at least 5 samples from keel to surface to get an adequate average of salinity.
AUTHORITY: Superintendent of Port Operations.

MANZANILLO: 19.03 N. 104.20 W.

DOCUMENTS:
14 Crew Lists.
20 Passenger Lists.
Derat Certificate.
Vaccination Certificate for each crew member.
Cargo Manifest and one copy to be visaed.
8 additional copies of Cargo Manifest, unvisaed.
10 Bills of Lading, one copy to be attached to each cargo manifest.

PILOTAGE: Pilot station cannot be contacted by radio, and Pilots are ordered by Agents basis Master's ETA.

Pilot boat is black with white wheel-house on which is painted letter "H". International Code signals used. Pilot normally boards vessel about 1 or 2 miles from breakwater but if requested in advance the pilot boat will come out to 5 or 6 miles. Pilot cannot board in rough weather. Vessels waiting for Pilot may anchor about 2 - 3 miles N.W. of breakwater in depths of 12-15 fathoms.
ANCHORAGE: Vessels may anchor in the whole North part of the Bay where depths are 12-15 fathoms at a distance of 1 - 2 miles from the coast.
RESTRICTIONS: Vessels may enter at any time day or night.
MAX. SIZE: No limitation for anchoring in the bay. For mooring alongside, max. length 200 m., max. draft 32 ft.

Also see "Tankers".
HEALTH: Port Health Officer and Immigration Officers board vessel at anchorage. Passengers and crew may be required for inspection. All passengers and crew members must possess Smallpox Vaccination Certificates.
RADIO: Coastal station Manzanillo Radio, call sign XFM, operating 0600-1800 hrs. local time.
TUGS: 1 tug available, compulsory to use tug when mooring alongside. Tug will join vessel as ordered by the Pilot.
BERTHING: Vessels may berth at both sides of the pier or at the North end of the pier.
STEVEDORES: Advise Agent in advance number of gangs required. Discharge rate approximately 20-25 t.p.h. per gang.
MEDICAL: Agent should be advised in advance if medical attendance required on board. Hospital facilities available.
TANKERS: 2 berths available, max. length 650 ft. No restriction on beam. Max. draft: N.E. side 31 ft. (Forward) and 38 ft. (Aft). S.E. side 33 ft. (Forward) and 38 ft. (Aft).
FRESH WATER: Should be ordered in advance. Rate of 10 t.p.h. Vessels must furnish own steam for pumping, 2 inch coupling. No barges available for delivery at anchorage.
FUEL: Should be ordered in advance: All grades available. May be expensive due Customs fees.
DEVELOPMENTS: Improvements are in progress to accommodate vessels up to 30,000 tons with a draft of 40 ft.
GANGWAY/DECK WATCHMEN: No shore service available.
OPENING/CLOSING HATCHES: Normally performed by crew members.
CUSTOMS ALLOWANCES: Each crew member may retain 1 carton of cigarettes, and 1 bottle wine/spirits for his own use. No alcohol may be taken ashore.
IDENTIFICATION CARDS: Identification cards or shore passes are necessary for crew going ashore.
CONSULS: Nearest are at Colima and Guadalajara.
REPAIRS: Only repairs to auxiliary machinery can be effected. At Guadalajara hull repairs may be effected provided dry dock not required.
REPATRIATION: Can be arranged.
AIRPORT: Local airport only for internal traffic.
TIME: GMT minus 6 hrs. all the year round.
HOLIDAYS: The following holidays can only be worked in case of emergency: 1st January; 5th February; 21st March; 1st May; 5th May; 16th September; 12th October; 25th December; and in addition 23rd May, Anniversary of the Stevedores' Union.
POLICE/FIRE/AMBULANCE: Police Tel. 4; Fire 23; Ambulance 96.
TELEPHONES: Cannot be connected on board ships.
SHORE LEAVE: Permitted, except for crews of Russian, Cuban and Communist Chinese vessels.

Crew members required present their identity cards to Immigration at the gangway. Crew members left behind by vessel must be covered by 10,000 Pesos bond to guarantee repatriation expenses.
AUTHORITY: Capitania de Puerto Edifico Federal.

MAZATLAN: 23.11 N. 106.26 W.

SHIPMASTER'S REPORT: August 1977.
DOCUMENTS:
Port Clearance from previous port.
4 Store Lists.
12 Crew Lists.
2 Passenger Lists or Nil Passenger List.
(All to be stamped by Mexican Consul or a representative of a friendly country.

On arrival the following officials board:
Port Health Authority.
Customs.
Agricultural Department Authority for checking ships provisions, mainly vegetables.
Doctor for checking 'meat' in the fridge room.
Immigration.
Ships Agent.
Port Authority representative.

The (provisions) meat room is sealed after inspection by the doctor, every morning the seal is broken and resealed after the days provisions are taken out.
PILOTAGE: Pilots can be contacted on VHF Channel 16. Pilots board in position 23° 10′ 24″ N., 106° 26′ 24″ W. with Creston Island light bearing 116° (T) × 0.4 miles.
APPROACHES: The approach is clear with no obstructions except Piedra Negra rock which is just 7 ft. above the water. Vessel should head for Creston Island light, keeping at least 2 cables clear of Piedra Negra rock.
ANCHORAGE: Anchorage is not in the position marked on the British Admiralty Chart. I was told about this by the Pilot when he boarded. The anchorage is now shifted and a vessel should anchor East of a line drawn North/South through the Eastern tip of Island Chivas, East and clear of Piedra Negra rock but outside the 10 fathom line. The holding ground is not good. Creston Island light is a very powerful light, but its characteristic is now Fl. white every 8 sec. and not as marked on the chart.
RADIO: Mazatlan has a coastal radio station but only works on Medium frequency.
TUGS: Only 1 tug is available, if a second tug is required it has to be called from another port.
BERTHING: There are 4 berths:

No. 1	213 m. length	9.0 m. depth alongside.
No. 2	210 m. length	8.5 m. depth alongside.
No. 3	214 m. length	9.0 m. depth alongside.
No. 4	351 m. length	10.0 m. depth alongside.

TANKERS: Max. draft 29 ft. and LOA 590 ft., however tankers of 629 ft. LOA have discharged.
STEVEDORES: Gangs work from Mondays to Saturdays from 0800 to 1700 hrs. Any work after 1700 hrs. till 0700 hrs. next day and from 1700 hrs. on Saturday till 0700 hrs. Monday is overtime. Cotton bales are loaded at the rate of 85 to 90 bales per hour per gang. The bales stow at 29/30 cu.ft. per bale.
FUEL: Can be supplied, but has to be arranged in advance through PEMEX (Petroleos Mexicanos) office in New York. Diesel oil is normally supplied by trucks.
FRESH WATER: Can be obtained at any time and is supplied by hoses (ships hoses) from the quay at about 9 Pesos per ton.
STORES: Provisions are available, however it is difficult to get a variety and frozen vegetables are not available.
MEDICAL: Assistance available.
IDENTIFICATION CARDS: Not required, crew can go ashore, there are no restrictions, but all passports and seamen's books are kept in the custody of the Master.
REPATRIATION: Can be arranged via Mazatlan Airport or Mexico City.
TIME: GMT minus 7 hours throughout the year.
SHIPMASTER'S REPORT: December 1978.
Pilotage: Pilot compulsory. Pilot boards 1.5 cables of the South breakwater. ETA's and ammendments to be sent as soon as possible after leaving previous port.
Restrictions: Vessels can enter and leave day and night. However, they can only sail on the flood tide. Tidal range approximately 3ft.
Tugs: Tugs available but power not known.
VHF: Pilot, Port Authority and Agent on Channel 16.
Services Available: Fresh water (must be boiled for drinking). Fresh provisions. Airport (3 miles from city). Salvage Surveyor. Laundry service. Bunker fuel oil. Doctor and Hospital. Groceries and meats.
Density: 1020.
Charts: U.S. Chart 21301 B.A. Chart 3060.
Ship Anchored: 4 cables S.W. of Cerro del Creston Light in dense morning fog, depth 13 fathoms.
Pilot Boat: Low power, black hull with white superstructure, only came out to ship when the fog cleared. Requested first a gangway to board but afterwards changed his mind for a pilot ladder in view of a slight swell. Pilot boat also handled the ships mooring lines at the berth.
Breakwater: Quite narrow to pass through.
Buoys: Mostly all covered in guano.
Berth No.3: As there was a bulk carrier on the next berth the ship had to overhang the berth by approximately 12 m. However there were bollards on shore away from the quay to provide suitable leads for stern lines. The quay was low lying approximately 3 m. above the water with 1 m. max. rise and fall of tide.
Note: Admirality Tide Tables do not give any data for this port other than its range. U.S. tide tables give all required information.

Depth of Water: Average depth after sounding round hull was approximately 9.5 m., shallowest depth 8.5 m.
Officials: There is a Customs and Police gate on the quay.
Cargo Work: The ship loaded from refrigerated road trucks. The labour set their own derricks and took out the beams and plugs. However, it was over two hours before the first sling came onboard. Meal breaks were long necessitating the covering of open decks with plastic sheets to keep the cold air in. The cargo was not stowed very well, most of it was very crooked with large gaps between the deckhead and cargo. Gross hourly cargo rate is approximately 8 t.p.h.
Pilfering: There did not appear to be much pilfering. Keeping the offshore doors and the store rooms locked is a good precaution.
Early Morning Fog: On two mornings we had fog, clearing between 1030 and 1200 hrs.
Fresh Water: Available alongside the berth, appears to have no meter on it and we had to use our own hose and coupling. However pipe was left connected and we could top up whenever required.
Painting: No objection was made to painting the ship's side from a painting punt.
Life Boat: Starboard life boat was used for a trip to the beach, boat however should not be landed because of the heavy swell.

MINATITLAN: 17.54 N. 94.35 W.

DOCUMENTS: See "Coatzacoalcos."
PILOTAGE: See "Coatzacoalcos Pilotage." Port about 17.5 miles up-river from Coatzacoalcos. Vessels are piloted either up-river or down-river to and from Minatitlan.
ANCHORAGE: Only at Coatzacoalcos. At Minatitlan river is narrow and anchorage not permitted.
RESTRICTIONS: Vessels may enter harbour only in daylight. Latest time for entry and sailing to and from Minatitlan is 1500 hours.
HEALTH: Pratique never given by radio. Vessels granted pratique at anchor at Coatzacoalcos. Vessels must prepare accommodation ladder, to be boarded by port authorities.
MAX. SIZE: Max. LOA at Pemex berths: 475 ft. Max. LOA at Fiscal berth: 440 ft. No breadth restrictions at both. Max. draft permitted: 21 ft. in fresh water.
TUGS: 1 tug required to accompany vessels past the Coatzacoalcos Bridge. Tugs rejoin vessels in the river on arrival at berth. Tug's lines used. For vessels over 2,000 g.r.t. 1 tug required, over 3,000 g.r.t. 2 tugs required.
BERTHING: Normally vessels dock starboard side to. Petroleos Mexicanos (Pemex) has 8 berths for tankers, where they can load crude, fuel oil, gasoline benzene, xylene, metaparaxylene, toluene and other petroleum derivates. Fiscal berth has a length of 80 m. depth alongside of 22 ft. Actually only used to discharge bulk harmless fertilisers. Discharge performed by elevator at a rate of 800 tons per 24 hours, also by ship's gear using buckets at a rate of 200 tons per day per hatch.
TANKERS: No ballast to be discharged in the river. All ballast to be discharged to shore tanks through 2×6 in. pipe-lines.
STEVEDORES: No ETA advice necessary. Agent or Receivers of cargo order gangs to discharge. Straight working hours from 0700 to 1500 Mondays through Saturdays. Latest time to order gangs 0645 and 1445 hrs.
DENSITY: Averages 1006.
MEDICAL: Hospital facilities available.
FRESH WATER: Available at all berths, but is not recommended.
FUEL: Marine diesel oil and Bunker "C" obtainable at Pemex berths. Bunker "C" also obtainable by barge, and diesel oil only by tank truck.
CUSTOMS ALLOWANCES: No restrictions. Free use on board. 2 Customs guards remain on vessel while alongside.
DEVELOPMENTS: Constant programmes for more berths, sheds, dredging and equipment are under way, but rather slow.
REPAIRS: No dry docks available, but small repairs can be done in shore repair shops.
AIRPORT: About 15 minutes car drive away. Regular flights to Mexico City.
TIME: 6 hours behind GMT.
TELEPHONES: No facilities for placing telephones on ships.
AGENTS: See "Coatzacoalcos".

MORRO REDONDO, Cedros Island: 28.03 N. 115.11 W. (See Plan Book)

LOCATION: Morro Redondo: Bulk Salt Terminal 28° 10′ N. 115° 11′ W.
PORT LIMITS: The limits of the port consist of the federal and maritime zones found between the parallels of 28° 02′ 40″ North Latitude and 28° 09′ North Latitude on the Eastern coast of Cedros Island.
DOCUMENTS:
3 Crew Lists in Spanish, visaed by Mexican Consulate in previous port.
12 Ordinary Crew Lists.
3 Stores and Provisions Lists.
3 Lists of Crew Effects.
1 List of Crew Vaccinations.
Clearance from Last Port.
Certificate of Registry.

The authorities such as Port Health, Customs and Immigration together with the Agent will board after the vessel has berthed. Only in exceptional circumstances will the authorities board at anchor or off the berth.
PILOTAGE: Pilot arranged by Agent on the basis of ships ETA. Pilot boards when ship is within 1 to 3 miles of the berth, from a small MFV type pilot launch, painted black with white cabin and red deck. No radio.
ANCHORAGES: Good holding ground is found 1–3 miles North of the berth in 20 to 35 fathoms with the ship loading tower in line with the Morro Redondo lighthouse.
RESTRICTIONS: None. Vessels enter and clear 24 hours a day on a first come first served basis. Height of chute above MLLW is 48 ft.
MAX. SIZE: Minimum depth alongside 17 m. Largest ship to date 160,000 d.w.t.
HEALTH: Pratique granted by local doctor who boards on arrival. Requires Crew Vaccination Certificates and Master's Declaration of Health.
RADIO: Vessels can transmit and receive through KFS San Francisco Radio or KOK Los Angeles Radio.
VHF: Loading installation calls VHF Channel 16 when ship is expected and gives any information at this time. VHF is not normally manned so further communication is unreliable.
RADAR: None.
TUGS: 4 tugs are available ranging from 2,500 h.p. to 3,200 h.p. each. 2 tugs are normally used for berthing, 1 tug for unberthing. Tugs' lines at no extra charge.
BERTHING: 1 berth only consisting of dolphins, also large mooring buoys, 1 ahead and 1 astern, each about 600 ft. distance from berth. 2 mooring ropes must be bent together each end to reach buoys.
CRANES: None.
BULK CARGO FACILITIES: Port is solely for the purpose of loading solar salt in bulk. Loader is belt and spout type and is fixed in position. Vessel must be shifted from hatch to hatch by ship's crew.
STEVEDORES: No special requirements. Average loading rate 2,000 t.p.h.
MEDICAL: No advance notice required, doctor will attend on board at dock. Limited hospital facilities available. Vaccination Certificates for small-pox required.
DENSITY: 1026.
FRESH WATER: Not available.
FUEL: Not available.
FIRE PRECAUTIONS: No special requirements.
CONSULS: None.
REPAIRS: No repairs possible.
GANGWAY/DECK WATCHMEN: Shore gangway only, electrically operated and tended by stevedores. Deck watchmen required.
HATCHES: Opened and closed by ship's crew.
CARGO GEAR: One fixed loader only, controlled by stevedores.
REPATRIATION: Possible, with advance notice to Agent.
AIRPORT: Close to berth. Average 3 flights per week to mainland.
TIME: Standard time GMT minus 8 hours. Daylight saving time GMT minus 7 hours from last Sunday in April to last Sunday in October.
HOLIDAYS: Cargo is worked every day of the week including Sundays and holidays.
TELEPHONES: No telephone contact with mainland.
TELEGRAPH: Government public telegraph services available in village about 11 km. from port.
SHORE LEAVE: Allowed. No special shore passes required.
OPERATOR: Exportadora de Sol S.A.

NANCHITAL: 18.00 N. 94.27 W.

DOCUMENTS: See "Coatzacoalcos."
PILOTAGE: See "Coatzacoalcos Pilotage." Port about 3 miles up-river from Coatzacoalcos.
ANCHORAGE: See "Coatzacoalcos Anchorage."
RESTRICTIONS: Vessels may enter Coatzacoalcos only with daylight. Navigation from Coatzacoalcos to Nanchital remains closed from 1630 to 0700 hrs.
MAX. SIZE: Max. LOA 580 ft. No breadth restrictions. Max. draft permitted 27 ft. 06 in.
HEALTH: See "Coatzacoalcos."
TUGS: When vessels proceed to Nanchital, 1 tug accompanies to pass the Coatzacoalcos bridge, according to Port Regulations. Tugs again join vessels when arriving at Nanchital berths. Tug's lines used. For vessels over 4,000 g.r.t. 2 tugs used.
BERTHING: Normally vessels dock port side alongside. When current and circumstances permit vessel is turned around and docked starboard side to. There are 2 docks at Nanchital, called Old Pier and New Pier. Both to load crude oil, No. 6 fuel oil by pipe-line of 6 in. and up to 10 in. Mooring, unmooring, connecting and disconnecting hoses performed by Pemex own labourers.
MEDICAL: Hospital facilities available only at Coatzacoalcos.
BALLAST: Special regulation for tankers that no ballast water to be discharged in the river. Deballasting performed by 2 pipe-lines of 6 in. diameter to shore tanks.
DENSITY: Average 1006.
FRESH WATER: Available at both berths but is not recommended for drinking.
FUEL: Available only at the Pemex Oil Terminal at any time.
DEVELOPMENTS: Constant programmes for more berths, sheds, dredging and equipment are under way, but rather slow.

CUSTOMS ALLOWANCES: No restrictions. Free use on board. 2 Customs guards stay on board. Vessel to provide them boarding and lodging.
CONSULS: None.
REPAIRS/DRY DOCKS: No dry docks available, but small repairs can be done in shore repair shops.
AIRPORT: At Minatitlan, about 1 hour car drive away. 2 regular flights to Mexico City.
TIME: 6 hours behind GMT.
TELEPHONES: No facilities for placing telephones on ships.
AGENTS: See "Coatzacoalcos".

PROGRESO: 21.17 N. 89.39 W.

DOCUMENTS:

Crew List visaed by the Mexican Consul and 7 simple copies.
Derat Exemption Certificate.
Valid Smallpox Vaccination Certificates for all crew and passengers.
Passports or Seaman's Book for all crew.
Clearance from last Port of Call.
Passenger List visaed by Mexican Consul and 7 copies.
6 Stores Lists.
7 Manifests.
7 Bills of Lading (2 to be visaed).
Tonnage Certificate.
Certificate of Free Pratique.

PILOTAGE: Compulsory. Pilot boards about 3.5 miles North of the lighthouse from a fast launch. International signals to be used to call Pilot day and night. ETA should be passed to Agent via radio station at least 24 hours before arrival.
ANCHORAGE: Vessels waiting for a berth anchor 3 miles off the Fiscal quay. The anchorage is marked on Chart H.O. 0966.
RESTRICTIONS: No night restrictions. Also see "Max. Size". No facilities for tankers.
MAX. SIZE: Max. LOA, 190 m. Max. draft 16 ft. (arriving), 16 ft. 06 in. (sailing).
HEALTH: The doctor boards the vessel at the quay. Where illness or fever is suspected on board, international rules are followed. If the vessel is arriving from another Mexican port, there is no health inspection. Radio pratique is not obtainable.

Authorities require Smallpox Vaccination Certificates for all crew and passengers, and valid Derat Exemption Certificates. No radio pratique prior to arrival obtainable.
RADIO: Progreso Radio XFN works from 0600 to 1900 hrs. every day and listens on frequencies 2,182 kc/s. and Channel 16 VHF on radio-telephony and 500 kc/s. on radio-telegraphy. Working frequencies are 2,756 kc/s., Channel 14, Channel 13 and Channel 12 VHF for radio-telephony, and 420 and 429 kc/s. on radio-telegraphy. ETA can be passed through this station 24 hours in advance.
TUGS: No tugs available.
BERTHING: One pier heading 355° true. Berth available on both sides, East and West, with 204 m. length on each side, and both with 18 ft. depth alongside.
STEVEDORES: No ETA advice necessary if stowage plan received in advance by Agent. Otherwise, ETA advice for gangs required 6 hours prior to arrival. Stevedores' General Cargo discharging and loading rate about 12 tons per gang/per hour.
MEDICAL: Attention available. The port has a clinic. Hospitals are situated in Merida.
TANKERS: No facilities.
DENSITY: Average 1015.
FRESH WATER: Available from pier by hoses. Fresh water is treated in the plant.
FUEL: Bunkers are available. Delivery by tanker truck equipped with pumps. Diesel and fuel supplied. Agent requires 24 hours notice.
FIRE PRECAUTIONS: No smoking allowed aboard vessels.
GANGWAY/DECK WATCHMEN: It is not necessary. Sometimes Masters require them.
OPENING/CLOSING HATCHES: This work is normally carried out by stevedores, but sometimes is carried out by crew in order to save time in loading or unloading.
CUSTOMS ALLOWANCES: Any quantity to be used on board is permitted.
IDENTIFICATION CARDS: Not necessary, but crew must carry passport or Seamans I.D.
CONSULS: The Consular Offices are located in Merida, the capital of State of Yucatan (20 minutes from Progreso by taxi):

Cuba	tel. 1 66 77	Lebanon	tel. 1 77 76
France	tel. 1 60 13	Switzerland	tel. 1 75 00
Germany	tel. 1 21 77	USA	tel. 1 60 30
Great Britain	tel. 1 67 99		

REPAIRS: Small repairs can be carried out in shore shops. No dry docks available.
REPATRIATION: There are facilities for effecting crew changes and arranging necessary repatriation. All matters are handled by the Office of Immigration.
AIRPORT: International Airport in Merida, about 30 minutes from Progreso by taxi. Daily services to Miami, Fla., by Pan American World Airways and New Orleans La., every 2 days. Other flights to Central America, Jamaica, and Germany.
POLICE/AMBULANCE/FIRE: Police 5 00 26.
HOLIDAYS: January 1st; February 5th; March 21st; May 1st (Labour Day); September 16th (Independence Day); November 20th (Revolution Day); December 1st (every 6 years); December 25th; It is possible to work, paying 100% additional.
TELEPHONE: It is not possible to place telephones on board.
SHORE LEAVE: Crew members are allowed ashore.
AUTHORITY: Harbour Master (Captain of the Port).

AGENT: Representaciones Maritimas S.A., c/o Fernando Patron Nicoli, 27th Street No. 112, Progreso, Yucatan, Mexico. No Telex. Tel. 5 00 52.

PUERTO MADERO: 14.41 N. 92.27 W. (See Plan Book)

LOCATION: Puerto Madero is located in approximately 14° 41′ N., 92° 27′ W., about 18 miles N.W. of the Ocos River. Tapachula, with a population of about 50,000, is 25 km. from Puerto Madero and connected by a good road.
DOCUMENTS:

10 Spanish Crew Lists.
10 Passenger Lists.
10 Store Lists (Spanish).
10 Cargo Manifests.
6 Arrival Report.
10 Bills of Lading for Puerto Madero.
6 Crew Customs Manifests.
1 W.H.O. Form (supplied by Quarantine Officer).

Vessels are boarded on arrival by 13 officials. The Agent acts as interpreter.

All papers must be correct. Immigration Officer checks crew list against all passports.
PILOTAGE: Pilot boards off the entrance from yellow surf boat fitted with outboard motor, not fitted with radio. Pilot speaks good English.
ANCHORAGE: A good anchorage can be obtained in soft mud between 1 and 2 miles S.W. of the breakwater head in about 7 fathoms. This anchorage, being exposed, is liable to strong swell from seaward.
HEALTH: All Smallpox Certificates individually examined.
RADIO: Salina Cruz.
BERTHING (Port under construction): There are 2 reaches, an expansion basin and a turning basin with a general cargo berth and a banana berth. For the present the general cargo berth only can be used. The project depth is planned to be 10 m. throughout – channels and turning basin. The max. draft the port is expected to handle will be 27 ft. At the present time the depth is 9.0 m. and permitted draft 8.0 m. Even in calm weather there is a good swell running and this dissipates in the expansion basin between the first and second reaches of the channel.

The first reach is entered on a heading of 045°(T) and passes between the breakwaters which are 650 m. in length and constructed of smashed rock and are visible on radar at 20 miles.

The semi-submerged wreck of a dredger lies close N.W. of the Northern breakwater. A flashing green light is exhibited from a lattice work tower on the Northern breakwater while a flashing red light is exhibited from a similar tower on the Southern breakwater. Although the breakwaters are 350 m. apart, an 80 m. channel exists in the centre. The least reported depth is 30 ft. This channel continues for a further 650 m. on the same course of 045°(T). To assist in steering 2 range lights and a day beacon are being constructed.

The second reach is entered on a heading of 000°(T) and narrows to a width of 50 m. and is 600 m. in length. The projected width of this reach is 80 m. At the end of the second reach the channel again turns to 045°(T) and great care must be exercised in negotiating this turn. A small yellow buoy marks the Southeastern side of the channel. The turn towards the berth is very tight and difficult without a tug. The berth itself has a reported length of 150 m.

The turning basin off the dock is reported to be 600 ft. but in actual fact is only 520 ft.

Upon leaving, turning the vessel short round is hazardous even with the help of small tug (750 h.p.).

Pilot who is also dredging Master appeared ready to take over once the turn is completed.
FRESH WATER: Available
REPAIRS: Very minor repairs can be undertaken but very expensive.
GENERAL: Extra meals for about 6 people. Agent will not sign for free issue or extra meals.

Advisable for all vessels entering this port to be well stocked with mosquito repellent.

Crew passes are not necessary for shore leave.

Fresh fruit and vegetables good quality and price, available from Tapachula 20 miles away.

Ship chandler and laundry service available.

The only reliable communications are via United Brands, Boston. They forward all ETA's etc. by telephone.

A teleprinter is located in the Fruit Agent's office but is only available during weekday working hours.
SHIPMASTER'S REPORT: February 1977.
Documents:

10 Spanish Crew List (7 Certified).
12 Passenger List (5 Certified).
6 Store List (6 Certified).
6 Priced Shop List.

6 Cargo Manifest (8 Certified with Bills of Lading for Puerto Madero Cargo).

6 Arrival Reports.

2 Health Part 1 and 2.

2 Crew Customs Manifest.

All the above papers were taken.

Officials: Immigration Officer boarded *with the Pilot*, checked all I.D. Cards and Passports against the Crew List.

15 People boarded on arrival, all in uniforms, i.e. Army, Navy, Police, Quarantine and Port Captain.

All bonded lockers were sealed as well as the beer room. All store rooms were checked.

Meals were provided for 11 people. 2 Customs Guards remained on board at all times, a room is required for them at night.

Pilotage: Compulsory. Pilot boards from a large, black hulled launch with a red superstructure, about 0.5 miles off the entrance.

Pilot speaks good English.

Approaches: New light structure, painted in red and white bands, and lying 0.3 miles North of entrance is conspicuous from seaward.

This light is expected to be in operation as from mid-February 1978, and will have the characteristics of the old one, lying 1 mile North, viz. Flash every 30 seconds. 2 rubble breakwaters 350 m. apart with red and green lights at their seaward ends are also conspicuous on Radar. All ranges into the port are marked with beacons and lights.

Turning basin is 280 m. in diameter, with a depth of approx. 10 m.

1 tug of 800 h.p. assists berthing, which is difficult. Berthing and unberthing should not be attempted during hours of darkness, nor when sea breeze is so strong as to hinder the attempt, Tidal streams outside the port are influenced by the wind. Tidal information is based on Standard Port of La Union, with a Secondary Port of Champerico, Guatemala, being used for Puerto Madero.

Anchorage: Anchorage may be obtained off the Port S.S.W. of the entrance about 0.5 to 1.5 miles off in mud, good holding ground.

Vessel arrived off the port in late January.

A heavy swell may however be experienced with a passage of a "Tehuantepecer" or of a Tropical Revolving Storm passing far out in the Pacific.

Depths in the roadstead may be between 12 to 16 m.

Max. Size: Max. size of vessel handled LOA 145 m. Beam 22 m. Draft 7.5 m.

Radio: Advise ETA 48 and 24 hours prior to arrival via any Mexican Coastal station.

Tugs: One tug of 800 h.p. assists in docking and undocking.

Berthing: One wharf at present in use, of 150 m. length, bulkhead type well fendered, depth alongside 10 m. on completion of dredging programme. Proposal for dredging out another wharf at right angles to the first also of 150 m. length and 10 m. depth, this to take place within the next 2 years.

1 Naval facility wharf in side channel and basin, pier 60 m. in length, depth alongside approx. 5 to 6 m.

Fishing pier also 60 m. long depth alongside 4 to 5 m. No other details known.

Cargo Handling: Ship's Gear, supplemented by 2 conveyor belt systems suitable for cartoned or boxed cargo.

Cranes: None, but mobile tower cranes may be obtained from Tapachula given sufficient notice.

Medical: Medical services available at Tapachula and San Benito, the Hospital will accept seamen.

Fresh Water: Fresh water laid on to principal pier, approx. delivery 12 t.p.h. Should be treated before drinking.

Fuel: Fuel pipe-line is built below principal wharf, but as yet, January 1977, is not connected to any fuel terminal. Fuel Oil may be obtained by road transport for the time being.

Repairs: Only minor repairs at present.

Communications: Road Service to Tapachula, thence air services are readily available to Mexico City, thence to all parts of the world.

Plans are in hand to build a large Airport complex near to Puerto Madero.

No port radio as yet, but future plans call for a Radio Station, and eventually Port Office will have VHF facilities.

Services: Provisions available from Tapachula if notice given. Deratting not available.

Consuls: There is a British Consul at Tapachula.

SHIPMASTER'S REPORT: August 1977.

Documents: Clearance from last port.

12 Crew Lists.
4 Store Lists.
4 Personal Effects Declaration.
1 Health Declaration.
2 Passenger Lists.
Ship's Register.
Deratting Certificate.

Pilotage: Pilot boards vessel 1 mile West of breakwater. Pilotage is compulsory. 48 and 24 hours notice to "Empresa de Servicios Portuarios de Puerto Madero".

Anchorages: 1.5 miles West of the breakwater in 8 fathoms of water.

Restrictions: No entering of port after 1800 hrs. No leaving of port before 0600 hrs.

Max. Size: Access channel 1,750 m. long, 10 m. deep, with an 80 m. wide bed. Turning basin 280 m.×325 m. and 8.5 m. deep. Pier 151 m. long, depth alongside 8.5 m. Pier equipped with cylindrical rubber fenders.

Tugs: 2 tugs available from November 1977.

Berthing: Loading and discharging operations with ship's gear. Dry bulk 28 m.t./hook hour (average). Sheds to handle banana shipments and conveyor belts, handling with side-ports system and average loading speed of 1,700 boxes per hour.

Fresh Water: Available from pier.

Gangway/Deck Watchmen: Security service rendered.

Time: GMT minus 6 hours all through the year.

Airport: International airport in Tapachula.

Services: The following services can be found in Tapachula City, Chis., 23 km. away from the port: Ship chandler service, mechanical and electric repair shops, hospital, telephone, telegraph and telex.

SHIPMASTER'S REPORT: October 1978.

Pilotage: Compulsory. Pilot boards 1 mile S.S.W. of North Breakwater, 24 hrs. and 12 hrs. notice required.

Restrictions: Limits of channels and Turning Basin are not marked. Daylight berthing and unberthing only.

Max. Size: LOA. 160 m. Beam 25 m. Draft 27 ft.

Anchorage: 0.5 – 1.0 mile from North Breakwater, depth 45 ft.

Health: Quarantine Officials require 24 hrs. and 12 hrs. notice of vessels arrival.

Radio: Salina Cruz.

VHF: Pilot and Port Authority on VHF Channel 16.

Tugs: One tug, 750 hp.

Berthing: General Cargo Berth: 2,200 m. from entrance. Max. size. LOA – 160 m., Beam 25 m. and max. draft 27 ft. Vessels size limited by width of turning basin. Least depth of water from sea to berth 9.0 m.

There are 6 hoppers available for bulk cargoes. No Ro-Ro facilities. No floating cranes. Security is good, berth surrounded by wire fence with only one entrance.

Density: 1025.

Consuls: British Vice-Council in Tapachula.

Services available: Fresh water; Fresh provisions (with 24 hours notice); Telex (at Tapachula); Doctor and Hospital; Airport (at Tapachula) 2 flights daily to Mexico City; groceries and meals (24 hours notice).

AUTHORITY: Capitania de Puerto, Puerto Madero.

AGENTS: Jose Antonio Tellez, Central Norte 125, P.O. Box 198, Tapachula, Chiapas (Province), Mexico. Tel. Office 612–40, Home 622–54.

Fruit Agent: Jose Leyba, P.O. Box 311, Tapachula, Chiapas (Province), Mexico. Tel: 615–31.

ROSARITO: 32.20 N. 117.05 W. (See Plan Book)

SHIPMASTER'S REPORT:

GENERAL: There is no port chart or approaches to Rosarito.

There are 3 sea berths only, 2 using anchors and stern buoys, and 1 single point mooring platform due to come into service Summer 1976. There is a continuous Westerly swell (July) and the berth is very exposed. Discharging a full cargo, it is advisable to commence ballasting as soon as possible to maintain a reasonable draft. There is no objection to this by the receivers.

DOCUMENTS: As for other Mexican ports re visaed Crew Lists etc. Suppliers in Curacao supplied all cargo documents with correct number of copies.

PILOTAGE: Pilot boards about 1 mile West of the berths from a black pilot launch equipped with VHF Channel 9. He speaks good English. The Boarding Officer boards with the Pilot. He speaks no English. The Pilot and Boarding Officer remain on board throughout cargo operations, also pilot/mooring launch is at hand at all times. All cargo operation liaison with the shore is by VHF operated by the Boarding Officer, who also does all Customs, Immigration work, etc., with the Pilot as interpreter.

APPROACHES: Straight forward, with a shelving bottom and ample depth of water up to the berths. Anchorage was found about 1.2 miles off the South buoy berth in 14 fathoms with good holding. Approach in poor visibility, common at this time of year, presented little difficulty once a position of berths is ascertained. Coronado Islands are good radar targets for position fixing.

RADIO: Communications to Agents in Ensenada through Manzanillo Radio XFM and then Ensenada Radio XFE on HF.

Petroleos Mexicano (PEMEX), the Charterers, have their own station at Rosarito which supplies berthing instructions etc. Station XIB83 working on 8690 mHz and 500 kHz. They also keep a listening watch on VHF Channel 9.

OPERATIONS: Local flag tonnage gets preference for the berths. This should have little effect with the single point mooring coming into operation shortly, giving 2 product berths.

The pipe-line is handled by ship's staff. All ullaging etc. done by ship's staff. A comparison between ship's figures, Bladings and shore figure is made on completion of discharge, before clearance is issued by the Boarding Officer.

No difficulty was encountered in maintaining the requested back pressure of 6 kg. at the manifold using 1/2 pumps. Liaison with the shore is excellent, by Boarding Officer on VHF with hourly checks.

SUPPLIES: No bunkers or fresh water. Provisions can be obtained in small quantities but are difficult to get on board and expensive. Medical assistance can be obtained ashore, but again with the difficulty in getting ashore it would be only in a serious case.

AGENTS: Only communication was on the second day by VHF but did not attend on board ship. This may be explained by the fact that due to the heavy swell it is difficult and sometimes dangerous to clear the breakwater by boat. This is endorsed wholeheartedly by Officers joining the vessel. However they were well attended by the Agent ashore. It is recommended that this port is not used for reliefs unless absolutely necessary. There was no shore leave allowed by me due to this.

SAN CARLOS: 24.47 N. 112.08 W. (See Plan Book)

PORT LIMITS: The limit of the port is up to parallel 24° 39′ 41.5″ N. which passes through the position of the East buoy of the channel entrance on Mexican Chart F.H.614.

DOCUMENTS:

Port Captaincy:
Clearance from Last port
Crew List.
List of Passengers.
Voyage memorandum including dates and ports visited during the previous 3 months.

Ports Operations:
Stowage plan.
Certificate of cargo handling equipment on board.
List of pecularities of the vessel.

Health:
List of Vaccination Certificates of the crew.
List of Vacination Certificates of passengers for the port.
Certificate of deratting or exemption.

Immigration:
Visaed crew list.
List of passengers for the port, also visaed.

Maritime Customs: Vessels without cargo, and arriving from abroad:
Declaration of arrival in Ballast.

Vessels coming from abroad with cargo for the port:
General Manifest for the port.
List of passengers for the port.
List of explosives, corrosives, inflammables for the port, visaed.

Vessels coming from a Mexican port to load:
Customs clearance.

Vessels coming from a Mexican port to unload:
Customs Clearance.
Cargo Manifest, visaed.
List of passengers for the port.
List of explosives, corrosives, inflammables for the port.

Inspection of Animal Health:
List of meats (tinned or fresh or refrigerated or in deep freeze).

Vessels bringing animals to the port:
Veterinary Health Certificate.
Transport Permit.
List of Meats (See above).

Inspection of Vegetable Health:
When products are not brought for discharge: Deratting Certificate or Exemption.

When products brought for discharge:
Deratting Certificate or Exemption.
Vegetable Health Certificate.
Importation Permit from the Secretariat of Agriculture and Cattle breeding of Mexico.

PILOTAGE: The port captaincy has VHF Channel 16 for receiving ETA's. The Pilot comes on board vessels by motor launch from San Carlos two miles from the entrance to the channel.

ANCHORAGES: Any location between meridians 112° 05.0′ W. and 112° 03′ W. and parallels 24° 38.5′ N. and 24° 37.5′ N. depths approximately 105 ft., sandy bottom.

RESTRICTIONS: With 26 ft. draft, vessels may navigate the Channel between buoys 'C' and 'D' to '5' and '8'. With a tidal rise of 4 ft., vessels enter and leave with a draught of 30 ft. at high tide.

MAX. SIZE: LOA. 600 ft. beam 100 ft. and draft 30 ft.

HEALTH: When coming from abroad, hoist the yellow flag. Inspection is effected when the vessel is berthed or at the inner anchorage. If the vessel is coming from another Mexican port, the health authority's visit is not necessary.

TUGS: None available.

RADIO: La Paz Coastal Radio: Call sign "XFK".

VHF: Port Captaincy on VHF Channel 16, operates between 0800 and 1800 hrs.

RADAR: This service does not exist.

BERTHING: The 'L' shaped quay is made of concrete and has 102 m. of berthing length. There are two "Dukes of Alba" making up a length with the quay for berthing of 204 m. Also there are two mooring buoys, one at each end of the berth. The minimum depth at low water is 37 ft. in the berthing area. Loading and discharging is effected using the vessel's own gear. It is possible to work in 2 or 4 gangs, according to the type of vessel and cargo.

CRANES: None.

BULK CARGO FACILITIES: On the quay there are installations of "CONASUPO" with a tower for shipment of grain, located in the angle of the 'L'. The grain generally shipped is wheat at the rate of 200 t.p.h. The height of the end of the grain output tube above sea level at full tide is 12 m.

SPECIALISED CARGO HANDLING FACILITIES: Vessels berth at the same quay as above with ammonia, unloading by means of installations located in the angle of the 'L'. These installations are owned by Fertimex.

BRIDGES: None.

STEVEDORES: Vessel's Agent submits a request 24 hrs. in advance for stevedoring services through the Superintendent of the Port Operations. Three products are mainly handled in the port: cotton at a rate of 90 bales per hr. gang. Bulk wheat at a rate of 200 t.p.h., bagged at the rate of 25 t.p.h. Fertilizers in bags at a rate of 25 t.p.h. Since the mechanical equipment on shore is sufficient for 2 gangs in the case of cotton, stevedores are requested for this number of gangs. As far as wheat is concerned, the loading rate drops to 80 t.p.h. when the warehouse has little wheat in it.

Stevedores work from 0800 hrs. to 0200 hrs. of the following day i.e. they work 18 hrs in 24 hrs.

MEDICAL: There is a civil hospital in Ciudad Constitucion 45 minutes away from San Carlos. There is a telephone service available for calling ambulances. There are 6 doctors in the port.

TANKERS: No facilities.

DENSITY: 1023.

FRESH WATER: This is supplied when the vessel is berthed. There are various 2 in. hydrants. The rate of supply is 10 t.p.h., and the approximate cost is 6.90 Mexican Pesos per ton.

FUEL: Moderate quantities of diesel oil can be supplied, and it is brought by road tanker from La Paz, the vehicles themselves pumping supplies to the vessel.

CONSULS: There are no consuls in the port.

REPAIRS: There are workshops at Ciudad Constitucion 45 minutes away by road.

DRYDOCKS: None.

GANGWAY/DECK WATCHMEN: This service does not exist.

HATCHES: Hatches are opened and closed by the stevedores.

SURVEYORS: None.

CUSTOMS ALLOWANCES: Tobacco, wine and spirits are placed under seal.

CARGO GEAR: For loading and discharge, ships' gear is used. There are no cranes in the port.

REPATRIATION: There are Immigration Authorities in the port. There are no hotels, however, there are several in Ciudad Constitucion and in La Paz. La Paz, is the capital of the State of Southern Lower California, and is approx. 3 hrs. away by road.

AIRPORT: None in the port. Airport at La Paz where there is an international airport called General Marquez de Leon.

TIME: Time is that of meridian 105° W. There are no seasonal time changes.

HOLIDAYS: 1st January, 5th February, 21st March, 1st May, 16th September, 20th November, 25th December, and 1st December (every 6 years). These dates are all obligatory.

POLICE/AMBULANCE/FIRE: In the port there are municipal and prison police, telephone No. 25. Ambulance and fire fighting services come from Ciudad Constitucion.

TELEPHONES: No service for installing phones on board vessels, but in the port there is a telephone service for communications with any part of the world.

SERVICES: None available.

SHORE LEAVE: No restrictions.

IDENTIFICATION: Seaman's book is sufficient.

REGULATIONS: No naked lights when there is cotton in the port or ammonia is being discharged.

DELAYS: As there is only one berth, there are times when the berth is occupied, but this does not occur often. Berthing is done in shifts.

DEVELOPMENTS: At the moment, there is no programme.

GENERAL: *Post Office:* At the moment, there is no Post Office in San Carlos.

Telegraph Office: There is a telegraph office but the service is not for maritime traffic. For such purpose, vessels must send their ETA via La Paz Coastal Radio Station.

SHIPMASTER'S REPORT: 1976.

Documents:
Visaed Crew List by Mexican Consul and 9 copies.
Visaed Cargo Manifest from each loading port and 4 copies.
Derat Exemption Certificate.
Valid Smallpox Certificates for all on board.
Passport or Seamen's Book for all on board.
Clearance from last port of call.

Approaches: A very strong current was experienced running from S.E.-N.W. when entering Bahia Magdalena at Pta. Redondo. Caution should be exercised making this approach, because currents can be strong and unpredictable in this area.

Pilotage: Compulsory. Pilot boards in Lat. 24° 39′ N. Long. 112° 05′ W. from small boat with outboard engine.

Anchorage is also good in this position should it be necessary to await Pilot or berth. The 2 buoys marking the entrance make good radar targets and are distinctive.

Restrictions: Channel must be navigated at suitable time of tide giving careful consideration to vessel's draft, in order to clear numerous shallow patches. Max. draft to date of vessel navigating channel was 30 ft. 4 in. on top of high water.

Radio: La Paz Radio (XFK) 500 kHz and 441 kHz. Working hours appear to be uncertain, but there is a working arrangement with Agent to transmit messages free of charge.

Charts: Chart used to navigate channel was Mexican No. FH. 614. Masters are strongly advised to obtain this chart.

Berthing: 1 pier 420 ft. long.

Fresh Water: Available at pier at 10 t.p.h.

Communications: Very poor. No telex, No telephone and no cable service. Telephone available at Villa Constitucion 57 kms. away by paved highway. Plans are in force to introduce a telephone service in the fairly near future.

Consul: If consular advice is required it is best to contact the British Embassy in Mexico City. Tel. 5 11 48 80.

Laundry Service: None.

Ship Chandler: None. A pick-up wagon can be supplied by Agent to obtain essential stores from supermarket at Villa Constitucion.

AUTHORITY: Capitania de Puerto de San Carlos.

TAMPICO: 22.16 N. 97.47 W. (See Plan Book.)

PORT LIMITS: Vessels in Mexican ports are considered to be arrived vessels as soon as permission to moor has been granted by the Port Authorities.

Permission to tie up will be granted on the quay or whilst in midstream, and occasionally during periods of very good weather a vessel is authorised to anchor in the port entrance.

DOCUMENTS:

1 Crew List visaed by Mexican Consul.
9 simple copies of Crew List.
1 Visaed Cargo Manifest from each loading port.
4 simple copies of Cargo Manifest.
1 Visaed Passenger List or visaed Statement to the effect of no passengers, and 5 simple copies.
2 copies of Store List.
2 copies of Personal Effects List.
Derat Exemption Certificate.
Valid Smallpox Vaccination Certificates for all crew and passengers.
Passports or Seaman's Books of all crew.
Clearance from Last Port of Call.
3 copies of lists of packages containing explosives, inflammable or corrosive materials.

PILOTAGE: Pilot ordered by Agent who requires 24 hours notice of vessel's arrival. Pilots board vessels 2 miles off the breakwater. Vessels may anchor about 2 miles off the breakwater waiting for Pilot. Pilots have radio-telephone, frequency 2182 and VHF Channel 16.

ANCHORAGE: About 2 miles East of breakwater in 40-60 fathoms of water.

RESTRICTIONS: There are no restrictions for movements at night. The drafts of the vessels will be governed by the mooring zones in which they are working. The depths at these berths are as follows:

*Free Zone Quay	30 ft.
Minera Autlan Quay	32 ft.
Petroleos Mexicanos Quay	30 ft.
Mexican Gypsum Quay	26 ft.
Metals and Minerals Quay	29 ft.
Anahuac Cement Quay	23 ft.

The navigation channel to the Mexican Petroleum Maritime Terminal has a depth of 38 ft. and that to the Free Zone 31 ft. *This depth is subject to constant dredger maintenance, the draft being reported weekly to the Ship Agents.

MAX. SIZE: The max. length is 656 ft. There are no restrictions for beam, The drafts will be those admissible in the corresponding berth used.

HEALTH: No radio pratique. Pratique granted after docking and presentation of documents to Port Authorities. In case of disease or fever on board, Master to give notice to Agent before arrival.

RADIO: Tampico has a coastal station with frequency 2182, as have the Port Captain, the Pilots' office and Gulf Tugs' office. All have the same frequency and VHF Channel 16.

TUGS: 3 tugs are available, intended solely for port manoeuvres, comprising *Guayalejo* 2,000 h.p., *Tamesi* 1,000 h.p., and *Panuco* 800 h.p. Also Petroleos Mexicanos have tugs whose power varies between 1,000 and 3,000 h.p.

BERTHING:

1 berth at the Minera Autlan quay where manganese is moved by moving belt at the rate of 1,200 t.p.h.

5 berths at the Pemex Quay, where oil and its derivates are moved at the rate of 600-800 t.p.h., by means of 4 in., 6 in., 8 in., and 10 in, pipes.

1 berth at the Mexican Gypsum quay where calcium sulphate is moved by moving belt at the rate of 500 t.p.h.

2 berths at the Metals and Minerals Quay, where bulk minerals are moved by 4 moving belts at the rate of 125 t.p.h. per belt.

1 berth at the Anahuac Cement quay, where bulk cement is moved by means of 10 in. pipes at the rate of 250 tons per pipe, there being 2 ducts.

7 berths at the Tampico Free Zone, where general cargo is moved at the rate of 20 t.p.h. per gang.

Berth	*Length*
1	145 m.
2	145 m.
3	145 m.
4	145 m.
5	145 m.
6	145 m.
7	180 m.

Depth alongside 10.5 m. Official fresh water draft 9.14 m.

All quays have lighting for night operation and telephone facilities.

STEVEDORES: No ETA advice necessary of Stowage Plans received in advance by Agent, otherwise ETA advice for gangs appreciated 48 hrs. prior to arrival. Stevedores general cargo discharging and loading rate about 20 t.p.h. per gang. Mineral loading at Metals Pier about 125 t.p.h. per belt (2 conveyor belts available to service both berths).

MEDICAL: Hospital facilities available. No advance notice required.

TANKERS: See "Berthing". Dirty ballast is received ashore.

DENSITY: Average 1006.

FRESH WATER: Available on written request from ship's Agent. Drinking water delivered by pump at the rate of 12 cu.m. per hour.

FUEL: Available preferably at the Petroleos Mexicanos Quays, although with 1 week's advice prior to arrival this service can be provided at the public service quays.

CUSTOMS ALLOWANCES: No allowances to be taken ashore, but reasonable amounts of tobacco and spirits are allowed to be taken out of bond, but to be kept on board for use of crew and passengers only.

CONSULS: Belgium, Brazil, Great Britain, Peru, Germany, Holland, Norway, Sweden, Italy, Uruguay and Lebanon.

REPAIRS/DRY DOCKS: There is a floating dock with capacity up to 4,000 gross tons, where hull repairs can be effected, as can work on steering system, machinery, marine auxiliaries and other equipment of less importance.

There are specialist workshops attached to the dock.

GANGWAY/DECK WATCHMEN: No watchmen necessary. Customs guard keeps watch at gangway while vessel alongside.

REPATRIATION: In the port there is an office of the Administrative Secretariat, where the repatriation of any crew member can be negotiated. This negotiation will be for the account of the ship's Agent, who is required to deposit a bond of $20,000 per person.

AIRPORT: At a distance of 10 km. from the port, there are regular flights to Monterrey, Nuevo Laredo, and Mexico City with connections in any direction.

TIME: GMT minus 6 hours.

HOLIDAYS: January 1st; February 5th; March 21st; May 1st; September 16th; November 20th; December 25th; December 1st every 6 years.

FIRE/AMBULANCE/POLICE: Fire Department 2 12 22; Red Cross 2 13 33; Police 2 11 57; Police (Jail) 2 10 32.

DEVELOPMENTS: Constant programming for more space at wharves, sheds, warehouses, continuous dredging and increasing capacity of operational equipment.

AUTHORITY: Superintendency of Port Operation.

AGENTS: Representaciones Maritimas, S.A., Edificio Luz -Piso 5 Despacho 523, Tampico, Tamps. Mexico. Tel. 2 34 77 and 2 46 62. Telex 01430. Cable: "Maritimex, Tampico."

VERA CRUZ: 19.12 N. 96.08 W. (See Plan Book)

PORT LIMITS: Area bounded by the reef lighthouses outside the breakwater.

DOCUMENTS: See "Coatzacoalcos".

PILOTAGE: Compulsory, advise Agent 24 hours before arrival giving name, flag, ETA and draft.

The Port Captain is to be given a min. of 2 hours' notice by the Agent. This to be done between 0800–1800 (Pilot office hours). Orders for Pilots between 1800-0800 hrs. to be made between 0800–1800 hrs.

The Pilot normally boards within the port limits, but if his services are requested outside such limits the Pilot will proceed to the location, i.e. the anchorage.

The pilot launch leaves from a "T" shaped pier when expected vessel is sighted. The launch has a black hull with white superstructure and false funnel painted black.

ANCHORAGE: In good weather, vessels may anchor in the outer area off the port, in the case of bad weather, to the South of the Isle of Sacrifices (Isla de Sacrificios). If the vessel prefers to anchor within the port limits, it must request the services of the Pilot and on anchoring for its own account within this sector must pay the fees due to the pilotage service.

RESTRICTIONS: In normal weather conditions there are no restrictions on entry and departure, the sole consideration being the draft of the vessel, since if this exceeds 29 ft. the time of the tide must be taken into consideration, and also after a strong North wind, a vessel drawing more than 24 ft. must wait for the tide. Depth in access channel 10.5 m.

MAX. SIZE: Length 200 m., at berth nos. 4 and 6 or the oil terminal.

HEALTH: The International Health Office gives a 24-hour service for the arrival and departure of vessels. To obtain free pratique on arrival of vessels there is a medical inspection, with submission of the Maritime Health Declaration, signed by the Captain, and examination of documents of Derat Certificate, certificates of vaccination of the crew and passengers; smallpox, cholera, yellow fever, (dependent upon the location from which the ship has come). Examination of crew members or passengers who might be declared as suffering from contagious illnesses. With these formalities fulfilled, free pratique is granted. Free pratique can be granted by radio, provided it is considered that the vessel's arrival will not give rise to the introduction or propagation of illnesses covered by the regulations, and that also the following requirements are fulfilled:

1. Exercise of greater epidemiological vigilance in respect of illnesses covered by International Health Regulations.
2. The Captain's radiogram must be presented to the International Health Delegation 8 hours in advance and must invariably fulfil all the stipulations as set out in the attached form.
3. Without prejudice to the foregoing, the Health Doctor or whomsoever he may designate, and where it is considered appropriate, shall go on board for the purpose of receiving the Maritime Health Declaration so that enquiries and verifications as may be considered necessary may be carried out.

Once the vessel has called at a national port, in subsequent national ports the requirements for obtaining free pratique will not be required, provided there does not exist on board any alteration in the health conditions as established in the Maritime Health Declaration.

Medical service to crew members and passengers on board foreign flag vessels is provided by doctors and private hospital institutions, through the intermediary of the consignee ship's Agent.

For possible handling of disease covered by the Health Regulations (smallpox, cholera, yellow fever, bubonic plague), there are isolation wards in the Official Hospitals "Aquiles Serdan" and "Regional de Veracruz".

The Office of International Health has immunisation services required for the diseases covered by the Regulation, which are certified on special international forms, with any cost, to crew members and passengers.

RADIO: Radio station Vera Cruz Radio, call sign XFU. Transmits on 420 and 451 kHz. and listens on 425, 454, 463 and 480 kHz. Also VHF Chanels 12, 16, 26 and 27.

TUGS: 4 tugs available, 810, 900, 1,000 and 1,200 h.p.; tugs' lines used at no extra charge. Tugs join vessels inside breakwater.

BERTHING:

Berth	*Capacity*	*Length (m.)*	*Depth (m.)*
No. 1	2 vessels	361.00	10
No. 2	2 vessels	431.00	9 to 10
No. 4	5 vessels	795.00	9 to 10
No. 6	5 vessels	725.00	9 to 11
No. 7	5 vessels	548.00	6 to 8
Marginal	3 vessels	682.00	9 to 10
Pemex	2 vessels	958.00	10

STEVEDORES: *Handling rates:* General cargo, 12 tons/per hook hour. Bulk cargo, 30 tons/per hook hour.

BULK HANDLING FACILITIES: Handling of grain at a mechanised plant, with storage capacity of 25,000 tons and an average discharge rate of 250 t.p.h. and loading rate of 400 t.p.h.

Handling of bulk sugar by mechanised installations, with storage capacity of 40,000 tons and an average loading rate of 800 t.p.h.

Handling of aluminium, coal brickettes, cement, latex, crystallised honey, chemical products, vegetable oils and crude oil.

MEDICAL: Doctors, dentists and hospital facilities available (see "Health").

TANKERS: Petroleos Mexicanos berth located in Northern part of port. Max. draft 28 ft. Berthing for 2 vessels of 170 m. LOA. Berth provides 5×8 in. lines for discharge of rerined product and 2×12 in. lines for fuel oil.

DENSITY: 1025.

FRESH WATER/FUEL: Available.

Berth	*Location*	*Water connection*	*Diesel connection*
Pier No. 1	North	4 at 2.5 in.	
	Head		
	South	3 at 2.5 in.	
Pier No. 2	North	3 at 2.5 in.	3 at 6 in.
	Head	2 at 2.5 in.	1 at 6 in.
	South	3 at 2.5 in.	3 at 6 in.
Pier No. 4	North	7 at 2.5 in.	2 at 6 in.
	Head	2 at 2.5 in.	3 at 6 in.
	South	8 at 2.5 in.	4 at 6 in.
Pier No. 6	North	3 at 2.5 in.	
	Head	2 at 2.5 in.	
	South	6 at 2.5 in.	5 at 6in.
Coasting	North	6 at 2.5 in.	
	Head	1 at 2.5 in.	
	South	5 at 2.5 in.	
Marginal	Single	4 at 2.0 in.	9 at 3 in. 1 at 2 in.
P. Mex.	Single	7 at 2.5 in. A.P.	6 at 8 in. refined
		1 at 4.0 in. C/I 2 at 3.0 in. C/I 4 at 2.5 in. C/I	10 at 12 in. fuel-oil

CONSULS:

Belgium
Brazil
Costa Rica
Cuba
Denmark
Dominican Republic
El Salvador
Finland
France
Guatemala
Great Britain
Honduras
Holland
Norway
Panama
Spain
Sweden
Switzerland
U.S.A.
West Germany

REPAIRS: Hull and machinery repairs can be effected by "Astilleros de Veracruz" (Vera Cruz Shipyard Company).

DRY DOCKS: "Astilleros de Veracruz S.A." has 4 docks, 2 floating and 2 dry docks. The largest of them is Floating Dock No. 4 with the following characteristics:

Length on stocks	169.210 m.
Internal useful beam	30.400 m.
Height of keel stocks	1.400 m.
Max. draft on keel stocks	8.200 m.
Lifting capacity	30,000 d.w.t.

Dock No. 2: with capacity for vessels up to 10.000 tons

Useful length	154.000 m.
Useful beam	19.400 m.
Draft	5.180 m.

Served by a 45 ton capacity crane

Floating Dock No. 3: with 3,000 ton capacity lifting capacity

Useful length	25.900 m.
Useful beam	13.550 m.
Draft	5.800 m.

Served by 2 (two) cranes of 10 ton capacity each.

Dry Dock No. 1

Length	45.720 m.
Useful beam	7.920 m.
Draft	2.130 m.

SURVEYORS: Lloyds, Norske Veritas and Germanischer Lloyd.

GANGWAY/DECK WATCHMEN: Available if required.

OPENING/CLOSING HATCHES: Mechanical hatches usually opened by crew, otherwise by stevedores.

CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle of spirits per man and will attend as necessary for further issues.

CARGO GEAR: Piers 1 and 2, 4×20 tons, 6×10 ton, 3×5 ton and 10×4 ton mobile cranes. Various cranes at piers 4 and 6. 2 floating cranes available max. lift 46 tons.

REPATRIATION: Possible, arranged by Agent.

AIRPORT: 8 km. from Vera Cruz, flights daily to Mexico City.

TIME: GMT minus 6 hours all year round.

HOLIDAYS: During the year the following holidays are observed: 1st January, 5th February, 21st March, 1st May, 5th May, 16th September, 12th October, 20th November and 25th December.

POLICE/FIRE/AMBULANCE: Police – 2.28.23, Fire brigade – 2.25.00, Red Cross – 2.01.40.

TELEPHONES: Available on most piers but not on vessels.

SERVICES: Provisions, laundries, and dunnage available. Garbage must be removed every 48 hours.

SHORE LEAVE: Possible.

DEVELOPMENTS: A new petroleum quay is to be constructed to take 2 tankers of 40,000 tons.

Container berth under construction, a transtainer, portainer crane and other equipment will be acquired in the near future.

GENERAL:

Government Secretariat – Local Administration Office

In accordance with the stipulations of Article 75 of the General Local Administration Law, vigilance of foreign crew members in vessels of any nationality tied up in national ports, together with visits or stays by the said crew members will be subject to the following requirements:

I. Heads of Local Government will designate accordingly personnel who will carry out vigilance of the vessel, in accordance with the provisions of Section II of Article 29.

II. Crew members may visit ports during the stay of the vessel, provided they deposit at the Local Administration Office their identity documents which for such purpose may be issued to them and their passports and other documents, all of which will be returned to them on re-embarkation.

III. Shipping companies, their Agents or consignee firms, for all legal purposes shall be responsible for the complete embarkation of crew members and for the costs involved in repatriating any who may remain behind after the vessel sails. When a crew member wishes to stay in the country, he must obtain documentation in compliance with one of the categories as set out in the appropriate Law and Regulations.

SHIPMASTER'S REPORT:

Documents:

1 Visaed and 9 Plain Spanish Crew Lists.
1 Visaed and 5 Plain Passenger Lists.
1 Visaed and 2 Plain Spanish Stores Lists.
2 Crew Customs Declarations.
5 Cargo Manifests.
1 Arrival form.

The Customs require a complete list of all shop goods priced in U.S. Dollars, failure to produce this will cause confiscation and $10,000 fine. The Customs thoroughly check bond and beer locker and seal same. All storerooms are also checked.

The Agricultural Inspector insists that all dry stores are fumigated and kept under seal for 24 hours. All refrigerated stores – except U.S.A. meat is sealed up.

Pilotage: Pilot boards 1 mile W.N.W. of Angeguda de Adentro Light beacon from black boat flying pilot flag.

Tugs: 2 tugs available for berthing.

Restrictions: Port open day and night. Prevailing Northerly winds are sometimes too strong to allow ships movement in harbour.

Health: Health authorities board after berthing.

Radio: ETA to be sent 48 hours in advance via XFB Cuidad de Carmen. Agent orders Pilot.

Fuel: Bunker C and Diesel are available. A mixing machine is being installed to supply intermediate. Bunkers are supplied from most quays and are expensive for foreign ships.

Consul: There is a British Consul.

Repairs: There are 3 drydocks and all repairs can be done.

Surveyors: There are Lloyds and N.B. Surveyors available.

Airport: The airport is 6 km. from Vera Cruz with twice daily flights to Mexico city.

AUTHORITY: Port Captain.

Monaco

NOTES

Please also advise Shipping Guides Ltd.

MONACO: 43.44 N. 07.26 E. (See Plan Book)

PORT LIMITS: The seaward boundaries of the port are materialized by the 2 breakwaters at the Eastern entrance.
DOCUMENTS:
2 Crew Lists.
2 Passenger Lists – 3 Landing Passenger Lists.
2 Store Lists.
1 Manifest (cargo).
1 Bill of Health.
Ship's Register.
PILOTAGE: ETA via Monaco Radio – Channel 16, 12, 23, 15, within range. Pilot boat is a small white tugboat with a black "P" painted on the hull. Meets vessels 1 mile radius from the harbour entrance.
ANCHORAGE: One half mile East of the Southern breakwater lighthouse. Depth at the anchorage 68 m.
MAX. SIZE: Max. length 130 m. Stern to the pier on the West side or alongside the North quay, only from October to March and with 8 days notice. Max. draft allowed: West Pier 8 m; North Quay, 6 m.
HEALTH: Health Declaration must be handed to the Customs. If coming from neighbouring countries (France, Italy, Spain) not requested.
RADIO: Monaco Radio VHF Channel 16. Port operations Ch. 12. Public telephone calls Channel 23 and 25.
RADAR: No port radar service.
TUGS: Pilot boat 96 h.p. available without notice. 1 tug boat 200 h.p. and 1 tug boat 450 h.p. Available without notice.
BERTHING: All 3 quays plus inner sides of the breakwaters and Western "T" pier are available for mooring yachts stern to. The port may be congested during the Summer season. The possibility remains of anchoring off the dock.
MEDICAL: There is a state hospital fully equipped for surgery etc.
FRESH WATER: Can be supplied at all berths alongside the quay. If vessel on roads water may be provided by barge up to 500 tons per day, with one week notice. Tel. Cannes 39.36.12.
FUEL: There is a fuel berth in port for yachts. No heavy fuel.
CONSULS: Most countries are represented in Monaco.
CUSTOM ALLOWANCES: Same as in French ports.
REPAIRS: Only for yachts.
DRYDOCKS: None.
REPATRIATION: Good railway connections.
AIRPORT: Nice – Cote d'Azur. Distance 25 km.
TIME: May to September GMT plus 2 hours. Other months GMT plus 1 hour.
HOLIDAYS: New Year – National Holiday, (Jan. 27); Easter Monday, (May 1st); All Saints Day – His Serene Highness' birthday Nov. 19. Harbour services work on Sundays and Holidays.
POLICE/FIRE/AMBULANCE: Maritime police Quai Antonie 1st Tel. 30.22.39; Ambulance/Police Secours Tel. 17; Fire brigade Tel. 18.
TELEPHONE: Available at all berths.
SERVICES: Engine repairs. Electronics. Maintenance for yachts. 220 volts available at all berths. TV aerial sockets at all berths free of charge.
SHORE LEAVE: Crew members allowed ashore.
DEVELOPMENTS: New yacht harbour now under construction.
REGULATIONS: *Recommendations to Ship-Owners, Masters and Crew Members:* Ship-owners, Masters and Crew members are strongly requested not to dispose of hydrocarbon, household refuse and other rubbish into the Monaco harbour (i.e. cartons and mainly plastic containers).

Used motor oils and other petroleum residues must be transferred into tanks exclusively provided for this purpose at the beginning of the North and South jetties and on the landing stages facing the Rainier III swimming pool.

These tanks are signposted with panels bearing the words "Huiles Usees" (used oil) in red letters on a white background.

Household refuse and other rubbish are to be put into garbage containers located around the harbour throughout the year. Furthermore, during the Summer, special individual bags are made available free of charge to all in-coming vessels.

Those responsible for ships equipped with used water tanks or bilges are requested to empty these containers off the coasts of the Principality at a minimal distance of 3 miles.

Those whose ships are not equipped with these used water tanks are requested not to dispose of their used water during their stay in the Monaco harbour, and to use the sanitary installations and facilities made available to them within the harbour.

Offenders infringing the above provisions will be penalized in accordance with the stipulations of Law No. 954, dated April 19, 1974, dealing with the fight against water and air pollution.
AUTHORITY: Captain J.B. Cornelius – Harbour Master .

Morocco

AGADIR: 30.25 N. 09.38 W.

DOCUMENTS:
Health Declaration.
4 Cargo Manifests.
6 Stores Lists.
6 Crew Lists.
6 Passenger Lists.

PILOTAGE: Compulsory. Pilot boards at port entrance. International code signals used.

ANCHORAGE: Good anchorage in open roadstead.

MAX. SIZE: Up to 29 ft. draft.

HEALTH: Pratique given immediately after berthing when port doctor boards.

TUGS: 2 tugs available, 1 × 350 h.p., 1 × 1,275 h.p.

RADIO: Agadir Radio operates 24 hours a day.

BERTHING: Alongside pier: berth 475 m. long, 9 m. depth; berth 380 m. long, 6 m. depth.

MEDICAL: Doctor and hospital facilities available.

FRESH WATER: Available from pipe-line at berths.

FUEL: Fuel and gas oil available from pipe-lines at berths.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

STEVEDORES: ETA required 24 hrs. in advance to arrange gangs.

OPENING/CLOSING HATCHES: Performed by stevedores.

CUSTOMS ALLOWANCES: Crew allowed normal daily consumption of tobacco, wine and spirits.

IDENTIFICATION CARDS: Required.

CONSULS: France, Spain, Belgium and Portugal represented locally.

REPAIRS: Small machinery and electronic repairs can be effected.

POLICE/FIRE/AMBULANCE: Police, tel. 23-49; Fire, tel. 22-43; Ambulance, tel. 19.

HOLIDAYS: 1st January, 6th January, 19th March, Maundy Thursday, Good Friday, 1st May, Ascension Day, Corpus Christi, 29th June, 18th July, 25th July, 5th August, 15th August, 12th October, 1st November, 8th December, Christmas Day. Work may be arranged on all holidays except Good Friday.

SHORE LEAVE: Allowed.

AUTHORITY: Director del Puerto.

CASABLANCA: 33.36 N. 07.37 W. (See Plan Book)

PORT LIMITS: Vessels considered as "arrived" when passing buoy CA 5 in position 33° 37′ 05″ N. 7° 35′ 02″ W.

DOCUMENTS:
Certificate of Registration.
Cargo Manifests.
Crew Lists.
Passenger Lists.
Customs Declaration.
Bill of Health.
Ship's Entry Declaration.
International Tonnage Certificate.

PILOTAGE: Compulsory for all merchant vessels of 100 tons and over, in the area between the meridians 7° 37′ 10″ W. (the root of Jetee Moulay Youssef) and 7° 33′ 50″ W. (Table d'Oukacha) and South of the parallel 33° 37′ 4″ N. Pilotage is available day and night. The Pilot meets vessel at the CA5 buoy.

A red flag displayed at the signal station by day indicates that the Pilot cannot come out, on account of the sea, but vessels may enter the port at their own risk, and the Pilot will await them under the shelter of jetee Moulay Youssef. Should bad weather prevent the Pilot from coming out, a vessel should not attempt to enter the harbour at night. The Master may contact the Pilot station for port radar service by VHF Channel 12.

ANCHORAGE: The anchorage outside Casablanca harbour is partially protected from winds between S. and W. but a Westerly swell finds its way into the bay. With a heavy Westerly or North-westerly swell the anchorage becomes dangerous.

The holding ground in most places outside the harbour is poor, but a berth with good holding ground may be obtained in a depth of 13 fathoms N. of jetee Moulay Youssef. There are numerous anchorage berths in the harbour, some at mooring buoys, in depths up to 12 m. 8 (42 ft.).

MAX. SIZE: Max. length permissible, about 884 ft.; max. breadth permissible, about 105 ft.; max. draft permissible, about 32 ft.; but normally 30 ft. for berthing alongside. Tankers: up to 34 ft. draft.

HEALTH: Masters must fill in the declaration of health and display the "Q" flag, to obtain pratique. In the event of any suspected disease or fever on board, Masters have to warn their Agent before the ship's arrival.

RADIO: The name of radio station for ETA cables to Agents, receivers, etc., is Casablanca Radio.

TUGS: There are 6 tugs of 800–1,500 h.p. 3 of them are sea-going tugs fitted with modern salvage apparatus. Normally tugs join the vessel at port entrance. To call them, 4 long blasts and 1 short for one tug, 4 long blasts and 2 short for 2 tugs, etc. Ship's lines are mostly used.

BERTHING: To arrange berth, ETA message should be given 24 hours before the ship's arrival.

Mooring. When making fast to the jetty by the stern, the anchor should be let go at a sufficient distance from the jetty to allow for a good scope of hawsers.

Vessels are recommended to secure with special 10-in. coir hawser tailed with wire. It is recommended to moor head to the swell, but in bad weather a vessel should be ready to leave at short notice.

CARGO HANDLING: Phosphate loading: up to 5,000 t.p.h. Depth alongside 32 to 26 ft.

Grain Handling: discharging 800 t.p.h., loading 400 t.p.h. Depth at silo berths 30 ft.

Containers: straddle carrier for handling up to 20 ft. containers.

Roll-on/roll-off: three berths for roll-on/roll-off vessels, depth 30 ft.

STEVEDORES: There are 13 stevedoring companies. Normal working days are in two shifts (from 0700 to 1500 hrs. and from 1500 to 2300 hrs.). Ship's Agents arrange gangs in connection with stevedores. Two daily orders (at 1100 and 1600 hrs.) are made to fix the number of gangs.

MEDICAL: It is necessary for Agent to receive advance notice of required medical attention. Hospital facilities available. Only smallpox vaccination certificates are required.

TANKERS: There are 4 tanker berths, *(a)* one for Import and Export of white products and max. permitted draft 34 ft. (Berth P3). *(b)* three berths for Import and Export of black products. These berths (No. 60, 61 and 62) are situated inside the harbour, vessel's draft should not exceed 30 ft.

FIRE PRECAUTIONS: Two firemen remain on board tankers while vessel berthed alongside. One fireman is required for other vessels carrying dangerous cargo.

FRESH WATER: Numerous feeders along berths. Also delivery by barges is possible.

FUEL: All grades available. Ex-wharf or by barge.

CONSULS: The following countries are represented by consuls in Casablanca:
Austria
Spain
Italy
Haiti
Finland
Great Britain
Greece
Germany
Norway
Sweden
Yugoslavia
Brazil
Netherlands
Algeria
Argentina
Belgium
Denmark
France
Poland
Panama
U.S.A.
Portugal

GANGWAY/DECK WATCHMEN: It is necessary to have watchmen on board. They are hired by the ship's Agent.

OPENING/CLOSING HATCHES: This work is normally carried out by stevedores.

CUSTOMS ALLOWANCES: 200 cigarettes are permitted for each crew member to be held out of bond.

IDENTIFICATION CARDS: Needed.

REPAIRS: Only small repairs and dry docking works are carried out.

DRY DOCKS: One large dry dock, 152 m. long and 22 m. wide (lifting power 10,000 tons). Three slips for ships up to 700 tons.

REPATRIATION: Facilities exist for effecting crew change and arranging any necessary repatriations.

AIRPORT: Distance from airport, 25 miles. International connections.

POLICE/AMBULANCE/FIRE: Police, 2210–74 or 19; Ambulance, 15; Fire, 15.

TELEPHONES: Only arrangements for placing telephones on board passenger ships are possible.

SHORE LEAVE: Crew members are allowed ashore.

AUTHORITY: Directeur du Port.

AGENT: Lasry Maroc, 61, Avenue de l'Armee Royale, Casablanca. Telex: 21949–21092. Tel.: 2688–75 – 2669–46. Cables: "Jolasry".

EL JADIDA (Mazagan): 33.15 N. 08.31 W. (See Plan Book)

DOCUMENTS: As for "Casablanca".

PILOTAGE: Arranged by Agent, basis vessels ETA given in advance. Pilot boards about 2 miles from the port entrance.

ANCHORAGE: About half a mile from head of North jetty in depths of 13 to 14 m. Hard rock bottom covered in sand. Holding ground is fair only.

RESTRICTIONS: The port comprises an entrance channel 50 m. wide and an outer harbour area 7 hectares, partially dredged to 3 m. depth to make a waiting basin. In the Southern part of the outer harbour is a quay, called the barge quay, 120 m. long, dredged to 6 m. depth.

MAX. SIZE: No limitations for vessels anchoring. For entering harbour, max. length 80 m., draft 5 m., entering at high water.

RADIO: No local radio station. Use Casablanca Radio for messages to Agent.

TUGS: Available. Normally join vessel 2 miles from port entrance.

CRANES: Two electric cranes and 1 diesel crane available.

MEDICAL: Hospital facilities available. Vaccinations can be arranged.

FRESH WATER: Available at the quay.

FUEL: Can be supplied subject to 24 hours notice.

WATCHMEN: Recommended to employ watchmen.

OPENING/CLOSING HATCHES: Work performed by ship's crew.

CONSULS: The only consular representatives are those of France and Portugal.

REPATRIATION: Can be arranged via Casablanca.

REPAIRS: Small repairs can be done on board, or parts sent to Casablanca. One small dry dock reserved for Port Authority vessels and fishing boats.
AIRPORT: Nearest commercial airport is Nouasseur. The airport at Camp Cazes, Casablanca, operates for internal flights only.
HOLIDAYS: Sundays and holidays, except for National holidays, can be worked on payment of overtime.
POLICE/AMBULANCE/FIRE: Police, tel. 19; Ambulance, tel. 15; Fire, tel. 15.
TELEPHONES: Cannot be connected to vessel, but telephone situated on the quay.
AUTHORITY: Ingenieur des Travaux Publics.

KENITRA: 34.17 N. 06.30 W.

Situated on the left bank of the Oued Sebou, 17 km. from the Atlantic.
PILOTAGE: Pilotage is compulsory for entering and leaving port. Vessels must wait outside the port entrance for the tide. It is possible to enter from 2 hours before until 1 hour after high water during the night, and from 3 hours before until 2 hours after high water during the day. The Pilot boards vessels at river mouth. The Pilot will be on station 2 hours before high water.

On arrival at the Roads or after 0830 hrs., call the Pilotage Department and advise arrival time at the Roads and draft.

Pilotage Department on VHF Channel 16 and 2182.
RESTRICTIONS: From the mouth of the river up to the port is a dredged channel. Depths are 4.20 m. during neap tides and 5.40 m. during spring tides. Height of tide during neap tide is 2.60 m. Height of tide during spring tide is 3.80 m. The constant is 1.60 m.

During the Winter it is recommended to stay outside the port in strong squalls. Ships are advised by Kenitra port radio of the possibilities for entering port.

Between November and April there is a total of 6 or 7 individual days when the port is closed to navigation, due to weather conditions.

Vessels are berthed and unberthed in daytime only at present time.
RADIO: Messages to ship's Agent should be sent through Casablanca Radio. In the ETA message to Agent, also advise vessel's draft. There is a radio station at Kenitra for port use only. Watch-keeping hours are only during high water, on 2182 k/Hz.
TUGS: Two tugs of 250 h.p. and one of 130 h.p.
BERTHING: The outer port used only by trawlers, and a mooring quay of 360 m. length belonging to the Royal Moroccan Navy. The length of main quay is 870 m. and includes 10 berths. In addition to the above there is a jetty for wine vessels, and a jetty for oil tankers.
FRESH WATER: Supplied alongside the quays.
FUEL: There are supplies of diesel oil, gas oil and petrol in the port. These products supplied by tanker lorry along the quay.
REPAIRS: There are workshops for small running repairs in the port. There is a slipway for ships up to 400 tons.
CONSULS: The Consular representatives at Kenitra are those of Belgium, France, Portugal.
AIRPORT: The nearest commercial airport is that of Rabat-Sale and there is a small airfield at Kenitra.
AUTHORITY: Directeur du Port.
AGENT: Consortium Industriel Commercial Maritime, 19 Boulevard Imam Ali, Kenitra. Tel. 21 39, 28, 37, 22 56 (2 lines). Telex: 31030 Boutrans 31966 Incomar. Cables: "Incomar Kenitra".

MELILLA: 35.18 N. 02.57 W.

DOCUMENTS:
Health Declaration.
4 Cargo Manifests.
2 Stores List.
5 Crew Lists.
5 Passenger Lists.
PILOTAGE: Compulsory for vessels over 500 tons. ETA to Agent required at least 10 hours before arrival to arrange Pilot. Pilot boards at anchorage near port entrance. International code signals used.
ANCHORAGE: Half a mile East of port entrance, in depths of 14 to 20 m.
RESTRICTIONS: Entrance normally in daylight only. In case of emergency vessel may enter at night.
MAX. SIZE: Up to 32 ft. draft.
HEALTH: Pratique obtained immediately after berthing when vessel boarded by health officials.
TUGS: One tug of 550 h.p. available.
MEDICAL: Doctors and hospital facilities available. Vaccinations can be arranged.
TANKERS: One oil berth for tankers up to 32 ft. draft.
FRESH WATER: Available at all quays.
FUEL: Available subject to advance notice.
GANGWAY/DECK WATCHMEN: Available. Consignee Agents have their own watchmen for goods on the quay.
OPENING/CLOSING HATCHES: This work is carried out by stevedores.
CUSTOMS ALLOWANCES: Crew allowed normal daily consumption of tobacco, wine and spirits.
IDENTIFICATION CARDS: Required.
CONSULS: France and Italy are represented locally.
REPAIRS: All types of engine and hull repairs can be effected for smaller vessels.
REPATRIATION: All facilities available.
AIRPORT: Situated 1 km. from the city. 3 daily flights to Malaga, except on Sundays.
HOLIDAYS: 1st January, 6th January, 19th March, Maundy Thursday, Good Friday, 1st May, Ascension Day, Corpus Christi, 29th June, 17th July, 18th July, 25th July, 15th August, 12th October, 1st November, 8th December, Christmas Day. Work may be arranged on all holidays except Good Friday.
POLICE/FIRE/AMBULANCE: Police, tel. 1741 or 1744; Fire, tel. 1693; Ambulance, tel. 1441.
TELEPHONES: It is possible to arrange for a telephone to be placed on board.
SHORE LEAVE: Allowed.
AUTHORITY: Ingeniero Director del Puerto.

MOHAMMEDIA: 33.45 N. 07.22 W. (See Plan Book)

DOCUMENTS:
Bill of Health.
3 Crew Lists.
3 Passenger Lists.
3 Provisions Lists.
Manifests and Ship's Papers for Agent.
PILOTAGE: Compulsory for vessels entering or leaving the harbour or shifting berth. Pilot available for vessels arriving during night and wishing to enter the basin when conditions are possible.
ANCHORAGE: Three good anchorages in depths of 11 to 6.5 fathoms about a mile N.E. of the entrance, and N.W. and S.E. of the pipe-line area.
RESTRICTIONS: Vessels with a draft over 15 ft. wishing to berth in the basin, are obliged to wait for tide.
MAX. SIZE: Sea line installation: tankers up to 45,000 tons d.w.t.
Imodco Buoy Berth: tankers up to 100,000 tons d.w.t.
For the basin: max. length 150 m., max. draft 6.9 m. (22 ft. 8 in.).
HEALTH: Port sanitary control officer boards immediately after arrival for pratique delivery. In the event of any suspected disease or fever on board, it is necessary to advise by radio to Agent 24 hours before arrival. Pratique is automatic after calling at another port of Morocco.
RADIO: Casablanca Radio station.
TUGS: There are no tugs but 3 Pilot boats of 150 h.p. will assist vessels if necessary, or tugs can be ordered from Casablanca.
BERTHING: Vessels up to 150 m. in length and drawing up to 6.9 m. (22 ft. 8 in.) at Spring tides and 5.4 m. (18 ft.) at Neaps.

Quay No. 1 has a length of 70 m. with a depth of 8.50 m. (28 ft. alongside).

Quay No. 2 has a length of 170 m. with a depth of 5.50 m. (18 ft. alongside).

Quay No. 6 has a length of 60 m. with a depth of 6.00 m. (19 ft. 8 in. alongside).
TANKER BERTHS: Single buoy mooring located in position 33° 44′ 01″ North, 7° 23′ 02″ West in depth of water 70 ft. Diameter of swinging area: 850 m. The buoy is marked by a white light flashing once every 3 seconds, also equipped with radar reflector and fog horn, which sounds, once every twenty seconds.

Vessels may be berthed by day or night. Mooring is effected by 2 floating nylon ropes, each 40 m. long, made fast to the fore end of the vessel.

The buoy is connected to a floating crude oil line, 20 in. diameter, with two flexible hoses of 16 in. diameter. One flexible hose of 8 in. diameter is available for discharging refined products. There are no facilities for discharge of slops or dirty ballast.

There is also a conventional buoy berth, in depth of 50 ft. Diameter of discharge lines 14 in. No slop discharge facilities.

Smaller tankers may also berth at harbour quay No. 1.
STEVEDORES: The loading and discharging capacity of general cargo or timber is 300 tons per day. Gangs are arranged by the stevedores according to the cargo plan given by the consignee to the harbour authorities.
MEDICAL: There is the hospital in Mohammedia, and other hospitals and clinics in Casablanca (16 miles away). Vaccinations can be arranged.
DENSITY: 1025.
FRESH WATER: Water can be supplied at any time alongside the quays at the rate of 15 t.p.h. There is no fresh-water supply to the offshore tanker terminals.
FUEL: Available from Casablanca at 48 hours notice.
FIRE PRECAUTIONS: All tankers are confined by gates and watched over by special firemen.
GANGWAY/DECK WATCHMEN: Services of watchmen are recommended.
OPENING/CLOSING HATCHES: This work is normally carried out by crew. When carried out by stevedores the cost is charged.
IDENTIFICATION CARDS: Passport required and police permit for leaving the harbour.
CONSULS: There is no consul in Mohammedia. All are in Casablanca.
AIRPORT: The nearest airport for international flights is Nouasseur. Casablanca Airport operates internal flights only.

HOLIDAYS: 1st January; 1st May; 3rd March; 18th November; and any other religious holidays which are not at regular dates. Only on two days (1st January and 1st May) no cargo work can be arranged.
POLICE/AMBULANCE/FIRE: Police, 21.51; Ambulance/Fire, 15.
SHORE LEAVE: Allowed.
AUTHORITY: RAPC, Port de Mohammedia.

SAFI: 32.19 N. 09.12 W.

DOCUMENTS: Clearance procedure is very simple. 3 Crew Lists, 1 Personal Effects Lists, 3 Passenger Lists and 1 Stores Lists only are required. Other documents are presented on berthing.
PILOTAGE: Arranged by vessel's Agent, to whom a correct ETA should be given. There is VHF radio contact with the pilot station and Harbour Master's office. The pilot boat is located inside the harbour and the Pilot boards in the anchorage. Pilot ladder only is required.
ANCHORAGE: Recommended anchorage is S.W. of harbour entrance. Safe holding ground for 25,000 d.w.t. vessels. Vessels should keep port entrance clear.
MAX. SIZE: Vessels with a draft of more than 28 ft. and up to a max. of 30 ft. enter and sail at higher water.
HEALTH: Health Officer boards shortly after berthing but Agent must be advised before arrival if suspected disease or fever on board. Health clearance in one Moroccan port holds good for the next.
RADIO: Casablanca Radio for normal traffic or Safi Radio for local R/T traffic. Harbour Radio VHF Channel 16.
TUGS: Tugs stand by vessel inside breakwater and, usually, ship's lines are used.
BERTHING: Vessels berth in order of arrival. Port used for export of manganese and barytes. No night entry after 1900 hrs.
STEVEDORES: Gangs are arranged by vessel's Agent. Night work is possible from 1800 to 2200 hrs. and, very exceptionally, until 2400 hrs.
MEDICAL: Advanced notice of required medical attendance is advisable but not essential. Modern hospital and clinic are available. Smallpox vaccination only is necessary except when vessels have called at cholera and yellow fever ports.
TANKERS: Only small tankers used in this port. White products and gas oil imported; no export. Ammoniac tanker berth max. draft high water 30 ft.
DENSITY: Density varies between 1024 and 1026.
FRESH WATER: Availability not limited, by hoses from quay.
FUEL: Limited supplies gas oil; diesel available but must be stemmed. Fuel oil and large quantities diesel, gas oil can be delivered by tanking lorry from Casablanca.
GANGWAY/DECK WATCHMEN: Watchmen necessary. One watchman day and night.
OPENING/CLOSING HATCHES: Normally done by crew but can be arranged by stevedores with advance notice.
CUSTOMS ALLOWANCES: 200 cigarettes, and one open bottle of spirit allowed each man. Bond is sealed and heavy fines are imposed by Customs for smuggling.
IDENTIFICATION CARDS: These are needed.
CONSULS:

Denmark,	Tel. 30.39	Portugal,	Tel. 23.58
Finland,	Tel. 31.40	San Salvador,	Tel. 28.76
France,	Tel. 27.97	Sweden,	Tel. 29.06

REPAIRS: Major repairs not possible; small workshops only for repairing fishing boats.
REPATRIATION: Repatriation by air or sea through Casablanca, 150 miles away.
AIRPORT: Nearest at Novasseur, served by principal European airlines.
HOLIDAYS: On the following holidays no work is possible: 1st January (New Year's Day); 3rd March (Coronation Day); 1st May (Labour Day); 18th November (Independence Day). Other Moslem and Christian holidays are subject to last minute decisions as far as tariff is concerned, but work can be arranged.
TELEPHONES: No telephones can be placed on board. Public telephone available on the quay during working hours only.
GENERAL: Masters are strongly advised to take local currency from their Agent. Landing of foreign currency encourages black market transactions and incurs confiscation and heavy fines as well as delays by the Customs authorities.
SHORE LEAVE: Police permits are required by Liberty men and are delivered by Immigration Authorities.
AUTHORITY: Capitainerie de Port.

TANGIER: 35.47 N. 05.48 W. (See Plan Book)

PORT LIMITS: Vessels considered to be an "arrived ship" subject to Charter Party terms, on passing the line joining Pointe de Malabata, 35° 48′ 53″ N. 05° 45′ 00″ W. and the mouth of l'Oued el Youd, 35° 47′ 26″ N. 05° 50′ 00″ W.
DOCUMENTS: Required on arrival:
- Health Declaration.
- 2 Crew Lists.
- 7 Cargo Manifests.
- 5 Lists of Passengers Disembarking.
- 4 Lists of Passengers in Transit.

Required on departure:
- 5 Cargo Manifests.
- 5 Manifests of Passengers Embarking.

PILOTAGE: Pilotage is compulsory for ships of more than 50 g.r.t. for entering, leaving and shifting in harbour. Vessels arriving during the night must anchor outside the port, and are boarded by the Pilot after 0600 hrs. the following morning. Pilot on VHF Channel 16. Vessels should advise arrival 6 hours in advance.
ANCHORAGE: There are good anchorages to the East and Southeast of the breakwater head in depths of 10–16 m.
RESTRICTIONS: The harbour area between the breakwater and the extremity of the main pier has a min. depth of 9 m. Max. height of tide is 2.40 m., min. height is 0.10 m. West to S.W. winds from October to May. N.E. to Easterly winds from May to October, often very strong (the Levante).
TUGS: The port owns 4 tugs, 1,500, 500, 375 and 250 h.p. respectively. 2 of these tugs are equipped with fire-fighting equipment.
BERTHING: The port is protected by a breakwater 1,300 m. long on which is a tanker terminal dredged to 9 m. depth, 290 m. of quay dredged to 9 m., 160 m. of quay dredged to 8.50 m. and 100 m. of quay dredged to 5 m. These last 2 berths, which are reserved, the first for large car ferries and the second for the Gibraltar Ferries, are equipped with special ramps for disembarking vehicles.

In the South of the dock enclosed by the breakwater is a pier at which are 2 berths, 1 of 330 m. length dredged to 9 m. over 130 m. length and with 6 m. depth over 200 m. length. The other berth is dredged to 4 m. depth over 100 m. length and to 3.50 m. depth over 100 m. length.

In the Western part of the harbour there is a jetty of 100 m. length with berths on both sides each having depths of 6.50 m. This jetty is used by passenger ferries and is equipped to serve vessels discharging vehicles at the stern.

The port also includes a small jetty called the Yacht Jetty with depths varying from 2 m. at its foot to 3.50 m. at the jetty head. The small harbour inside the jetty includes the quays of the fishing port, the Yacht Club and barge berths.
FRESH WATER: Replenishment of fresh water can be made at all times alongside the quays at the rate of 30 t.p.h.
FUEL: There are no refuelling installations at the quays. Only very small quantities can be supplied by tanker lorries belonging to the oil companies.
STEVEDORES: Normal working hours are from 0800–1200 hrs. and from 1400–1800 hrs. Ships may be loaded and discharged outside these hours on payment of overtime. Usual loading and discharging rates are as follows: 15–18 t.p.h. goods in sacks; 12–15 t.p.h. for bales; 10 t.p.h. for general cargo; 7–8 t.p.h. for cork.
REPAIRS: There are no facilities for repairs in the port.
AUTHORITY: Regie d'Aconage du Port de Tanger.
AGENT: Lasry Maroc (Tangier), 4 rue de la Mediterrannee, Tangier. Telex: 33064. Tel. 335–75–325–76. Cables: "Jolasry".

NOTES

Please also advise Shipping Guides Ltd.

Mozambique

BEIRA: 19.46 S. 34.50 E. (See Plan Book)

PORT LIMITS: Vessels are considered to be "arrived ships" when they enter the pilotage area, i.e. when they enter to within a radius of 5 miles from the pilot boat. The custom of the port is that vessels are in "free pratique" only when they have entered port and have been cleared by the Immigration Authorities. Immigration will only clear vessels in port.

DOCUMENTS:

Customs Clearance from last port.
Health Certificate.
6 Crew Lists.
6 Lists Passengers in Transit.
7 Lists Passengers Disembarking.
2 Stores Lists.
2 Lists Deck Stores.
2 Lists Cargo in Transit (main items of cargo only).
6 copies of Manifest of Beira Cargo.

PILOTAGE: Compulsory for all ships other than naval vessels. Ship's name, ETA and draft should be radioed via Beira Radio, call sign CRS, 24 hrs. in advance to Port Captain Beira and owner's Agent.

The pilot boat – black hull, grey upperworks, black funnel with white "P" – is stationed 19° 52′ 47″ S., 34° 57′ 21″ E. Pilot boat call sign CRL H – W/T: listens on 500 kc/s., replies on 480 kc/s., – R/T: listens on 2,182 kc/s., replies on 2,341 kc/s. – VHF: frequency 156.6 Mc/s. (Channel 12).

Unless instructed to the contrary by the pilot boat, vessels with a draft under 25 ft. anchor by "P" buoy, 19° 52′ 47.3″ S., 34° 57′ 21.1″ E., and vessels with draft over 25 ft. anchor between "P" and "A" buoys, 19° 56′ 20.1″ S., 35° 02′ 44″ E.

In bad weather pilot boat may leave above position and enter port. In such cases vessels should anchor as indicated above, weather permitting.

ANCHORAGES: At Bar, "P" and "A" buoys as indicated above. There is anchorage for 4-6 ships, depending on size, in inner harbour off Cabedelo sand-pit.

RESTRICTIONS: Ships with draft 16 ft. and under can enter at any time. Ships with draft over 16 ft. generally enter 2 hrs. either side of high water.

MAX. SIZE: Max. permissible length about 800 ft. Max. permissible drafts between 33-36 ft. at springs, about 27-29 ft. at neap tides.

HEALTH: Vessel to radio "Sanidade Maritima", Biera, their ETA and "All Well". If "All Well", Health Certificate given by Pilot.

RADIO: Vessels to route messages through Beira Radio – call sign CRS. Agents radio ships through same station. Naval Radio Station – call sign CRX 3 available for distress signals.

TUGS: Join incoming vessels at inner anchorage, about 1 mile distant from quays. Ship's lines used. 4 tugs available, up to 3,200 h.p.

BERTHING: No night berthing done unless with prior consent of Chief Pilot, otherwise no specific requirements.

Pungue Wharf:

Berth No.	*Max. Depth (ft.)*	*Length of Berth (ft.)*	*Cranes (Electric)*	*Max. Jib. Ext. (ft.)*
1	28	580	2× 6 tons 4× 3 tons	55
2	29	530	2× 6 tons 4× 3 tons	55
3	29	530	3× 6 tons 3× 3 tons	55
4	30	530	2× 6 tons 3× 3 tons	55
5	30	530	2×3.5 tons 1× 5 tons 1× 3 tons	55
6	32	540	1×10 tons 5× 5 tons	75
7	32	540	1×10 tons 5× 5 tons	75
8	30	630	—	Coal/Ore Berth
9	30	550	1×10 tons 5× 5 tons	75
10 (Oil Berth)	31	550	1×20 tons 5× 5 tons	75

Range of Tides: 15–21 ft. Maximum depth of water should only be taken as an approximate guide as actual depths are dependent on the port dredging programme. Maximum permissible draft for turning ships round at or off the wharfs is 30 ft.

Chiveve Cais; length, 446 m.; depth, max. 10 m., min. 3 m.

CARGO-HANDLING FACILITIES: There is a mechanical ore appliance at No. 8 Berth Pungue Wharf, used mainly for minerals like chrome, etc. This appliance has an average loading rate of 400 t.p.h. It is equipped with only one spout.

Mobile Cranes: 25 cranes with capacity 1-10 tons.

Electric Cranes: See "Berthing"– Pungoe Wharf.

Steam Cranes: 19 cranes at Chiveve Wharf with capacity 3-20 tons.

Molasses: Storage tanks, capacity 18,000 tons. Served via No. 8 Berth.

Vegetable Oils and Tallow: 3 tanks×400 tons capacity.

STEVEDORES: Ordered by Agent. Vessels should advise Agent their ETA at least 12 hrs. in advance (weekdays), 24 hrs. in advance (week-ends).

Port Cargo Working Hours:

Normal	– Weekdays	– 0700–1100 1300–1700
	Saturdays	– 0700–1100

Overtime – The remainder of the day and up to 1700 hrs. on Sundays is considered overtime and is compulsory. All vessels are required to work full overtime including Saturdays and Public Holidays as ordered by Port Authorities. The only time when no work is carried out is from 1700 hrs. on Sundays to 0700 hrs. on Mondays.

MEDICAL: No advance notice required for medical attention, unless urgent assistance necessary. Hospital facilities available. Crew members and passengers should be in possession of valid smallpox and yellow fever certificates (cholera certificate too if from cholera area) on international forms. Vaccination/fever inoculations and certificates may be obtained ashore if required.

TANKERS: Discharge lines white and black oils, 2×10-in. lines feeding into 12 and 14-in. lines leading to storage tanks. Also a 22-in. discharge line for crude oil. No slop discharge facilities. 2 tanker berths, max. permitted drafts about 31 ft.

DENSITY: In harbour area allow 3 to 4 in.

FRESH WATER: Available at all Pungue Wharf berths, pumping rate about 50 t.p.h. Also available from water barge.

FUEL: Fuel oil 1,000 Secs R. viscosity, marine diesel 43.1 Secs R., diesel 34.1 Secs R. 3-4 days advance notice required. Bunkers delivered when alongside, no bunkering barge available.

GANGWAY/DECK WATCHMEN: Compulsory to employ watchmen to prevent pilferage.

OPENING/CLOSING HATCHES: Can be done by either crew or stevedores. Often done by crew.

SHIP CERTIFICATES: Tonnage Certificate to be produced to Pilot, as certain port dues are based on vessel's registered tonnage.

CARGO GEAR: All gear supplied by stevedores except rope slings, rain tents, and spreaders for heavy lifts.

IDENTIFICATION CARDS: Required. Passport if possible, otherwise Seamen's Book.

CONSULS: British (Tel. 22032), Belgium (23284), France (24074), Greece (23898), Holland (23174), Italy (22197), Malawi (24312), Norway and Denmark (22091), Panama (271519), Swiss (23137), South Africa (271251).

REPAIRS: Most types of deck and engine repairs are possible, but major repair jobs are not undertaken.

DRY DOCKS: 1 dry dock 115×17×8.5 m., suitable for ships up to 5,000 tons, LOA 377 ft. and max. beam 55ft.

REPATRIATION: Facilities exist for nationals of those countries maintaining diplomatic relations with Mozambique. A valid passport is necessary as Immigration authorities do not recognise a Seamen's Book as being a valid travel document.

AIRPORT: Beira Airport situated 7 miles from sea port. Regular flights to all destinations.

TIME: Local time 2 hrs. ahead of GMT. No alterations made to clocks during year.

HOLIDAYS: New Year's Day (1st January); National Day of Portugal (10th June); Corpus Christi (variable date); Assumption (15th August); Beira City Holiday (20th August); Republic Day (5th October); All Saints' Day (1st November); Restoration of Republic (1st December); Immaculate Conception (8th December); Christmas Day (25th December); No cargo work on 1st January and 25th December; on other holidays work continues normally in the port.

POLICE/AMBULANCE/FIRE: Port Police (Tel. 22920); Ambulance (22442); Fire (22222).

TELEPHONES: Can be placed on board. These telephones must only be used for local calls, not trunk calls.

GENERAL: Beira port works 24 hrs. per day, 7 days a week (except 1st January and 25th December) and overtime working is compulsory.

SERVICES Services available for tank cleaning, compass adjusting, minor repairs to radar and radio.

SHORE LEAVE: Crew members are allowed ashore, excepting nationals of those countries not maintaining diplomatic relations with Mozambique.

DELAYS: Generally no delays, but sometimes 24-48 hours delay following rain or bunching of arrivals.

MAPUTO: 25.59 S. 32.36 E.

DOCUMENTS:

6 Crew Lists.
1 Stores List.
6 Passenger Lists.
Last Port Customs and Port Clearance.
1 List of Ports of Call.
1 Health Declaration (given by Pilots on arrival).
1 Entrance Report (given by Pilot on arrival).
1 Customs Entrance (given by Agent on arrival).
1 Railway Statistics Form (given by Agent on arrival).

PILOTAGE: Compulsory. Channels in 24-hour use, but sailing after 2400 only by special arrangement with Immigration. Berthing only during day-light. Pilot station about 26 miles from Maputo wharf if South entrance used; 55 miles if North entrance used.

Pilot granted only if 16 hours' notice of ETA given.

On arrival vessels can contact Pilot on VHF Channel 16 (working on Channel 12).

The pilot ladder is used together with the accommodation ladder in order that the Pilot has a climb of 9 ft. on the pilot ladder.

IMMIGRATION CLEARANCE: Inwards: 0600–1800 hrs. only inside harbour proper. Outwards: 0600–2400 hrs. except in special circumstances.

N.B. Vessels at the pilot station cannot obtain pratique because this includes Immigration clearance and can therefore be considered as not having arrived or not being in all respects ready to load.

ANCHORAGE: Inside harbour: One each for vessels drawing 33, 31, 27 and 26 ft. respectively. Six for vessels between 17 and 19 ft. Vessels delayed in berthing are brought in from pilot station at port's convenience.

RESTRICTIONS: Berthing during day-light only. Unberthing 0600 hrs. to 2400 hrs. with exceptions of Matola piers where ships can only unberth during day-light. Ships over 650 ft. may not pass through dredged Channels at night. Ships up to 23 ft. may sail at any time, any tide up till midnight. Thereafter arrangements to be made with the Pilot Department for ETD.

MAX. SIZE:

	Max. *LOA*	*Depth* *L.W.O.S.T.*
General Cargo Wharf	750 ft.	22 ft.–34 ft.*
Matola Oil Pier	750 ft.	32 ft. 6in.
Matola Ore Appliance	820 ft.	40 ft. but governing draft is at the North Bar.*

*Maximum drafts published by Port Authorities. Approximately 34 ft. 5 in. to 37 ft. 2 in. depending on tide.

HEALTH: Pratique granted by Pilot unless disease prevalent on board when Masters should telegraph "Saude" Maputo.

RADIO: Advice of arrival 16 hours before to the Port Captain or Chief Pilot and Port Health should be sent through the station CRX (Naval), operating 24 hours on 500 kc/s., replying on 437 kc/s., also 2000 to 0500 hrs. GMT on 8356 to 8376 kc/s. (replying 3642 kc/s.) and 0800 to 2000 GMT on 12534 and 12564 kc/s. (replying 1299 kc/s.). All other non-official messages through station CRL, operating 0200–1800 GMT on 6 Mc/s. at even hours, 0400 to 1800 GMT on 4 Mc/s. at even hours plus 30 minutes (answering on 4259 kc/s.). Continues watch 0200–0400 GMT on 4 Mc/s. Radio telephone through CRL on 2132 kc/s. at even hours plus 45 minutes 0600–1700 GMT answering on 4415 kc/s.

VHF: Pilot boat (Inhaca Station) and port radio operate on Channel 16 (calling) and Channel 12 (working) from 0530 to 1830 hours.

TUGS: 4 tugs available, 3,200 h.p., 3,200 h.p., 1.500 h.p. and 1,200 h.p.

BERTHING: Carried out at all times between 0000–0600 hrs. at the Main wharves. At Matola Ore berth vessels must berth only at permissible times according to tides.

Main Wharf: All facilities owned and operated by Caminhos de Ferro de Mocambique (CFM), except stevedoring.

Dimensions: Wharf is in an uninterrupted line running roughly N.E./S.W., accommodating 12–15 vessels. Length: 3,033 m.

For loading or discharging bulk grain there are 2 Buhler machines at a berth with 33 ft. depth of water LWOST. About 120 t.p.h. A recent vessel averaged 2,900 tons per day.

Coaling Appliance: The coaling appliance can berth vessels of LOA 750 ft., beam 91 ft. 10 in. and a max. draft of 34 ft. 06 in.

The best loading rate, in theory, is about 10,000 tons per day, however, in practice, allowing for shunting trucks, warping ship, etc., average rate is about 7,500 tons per day.

The length of the chute is 181 m. and it operates between angles of 46° and 58° to the perpendicular. At 46° the tip of the chute is 4.80 m. above wharf level and 9.50 m. from the wharf edge. At 58° the tip of the chute is 7.60 m. above wharf level and 11.80 m. from the wharf edge. At lowest spring tide the water at the coaling berth is 5.90 m. below wharf level and at highest spring tide 2.15 m., the difference between max. extremities being 3.75 m.

Sugar Terminal: The daily intake capability of installation is 2,000 metric tons and it has storage facilities in three sheds with a capacity of 40,000 metric tons each. It has a nominal loading capacity of 750 metric tons. The stowage within each hold is done by means of a telescopic trough and a mechanical distributor (projector) and is capable of projecting the sugar in various angles and distances. Max. reach of the jib is 17 m. Min. reach of the jib (in use) is 11.50 m. and the limit of inclination of the jib (in use) is ± 15° Max. draft alongside is 33 ft. 06 in.

	Depths alongside:
Berth A	30 ft.
Berth B	32 ft.
Berth C	30 ft.
Berth D	31 ft.
Berth D3	31 ft.
Coal Tip	33 ft.
Berth Frigo	30 ft.
Berth G	33 ft.
Berth H	33 ft.
Wharf extension	40 ft.

LPG Carriers: Berth at Matola Ore Berth.

Timber: Vessels berth at Matola, Post No. 1 (P.I.). Max. draft 32 ft. Max. LOA, 600 ft. Vessels over 550 ft. LOA and draft over 25 ft. berth and sail during daylight hours only.

CRANES: *Electric cranes:* 82 units with capacity 3 to 20 tons. *Mobile cranes:* 63 units with capacity 4 to 12 tons.

Heavy lift crane with capacity of between 60–80 tons.

STORAGE CAPACITIES:

Ore and Coal dumps: Gorjao Wharf.

	tons
Coal	96,000
Ores	600,000
Copper	40,000
Vermiculite	4,000
Steel, Beams and Billets	46,000
Vanadium	7,000

Oil: Storage capacity 200,000 tons.

Molasses: 4 tanks, capacities 6,000, 9,000, 11,000 and 7,000 tons.

Fruit: 7,500 tons (1.133 cu. m./ton) in 100 chambers.

Fish: 200 tons.

Ore: Matola. Capacity 1.3 million tons. Loading speed for iron ore 1,500 t.p.h. and chrome ore 750 t.p.h. (via trucks) and 1,200 t.p.h. (ex bins).

Sugar: See "Berthing".

Containers: Containers and steel handled at the New Wharf Extension (Length 3,000–3,500 ft.). 20 ton cranes available, also 20 ton fork lifts for moving steel. Ro-Ro vessels will be handled from the beginning of 1979.

STEVEDORES: *Working Hours:*

Normal:	Weekdays:	0700–1100, 1300–1700
	Saturdays:	0700–1100.
Overtime:	Weekdays:	1900–2300, 0000–0600.
	Saturdays:	1300–1700, 1900–2300.
	Sundays:	All day.

Overtime is compulsory on a daily basis (including Saturdays and Sundays) from 1900–2300 hrs.. and from 0000–0600 hrs.

The responsibility for overtime costs should be clearly defined in the Charter Party, normally 50/50 between charterers and owners.

TANKERS: Matola Mineral Wharf, 40 ft. LWOST, max. length of vessel 820 ft. Matola Oil Jetty, 32 ft. 6 in. LWOST, max. length of vessel 750 ft.

Dolphin berth at Matola (P3) has been erected for tankers. Max. draft 35 ft. Max. LOA 750 ft.

FRESH WATER: Available at all berths, not available ex-barge.

FUEL: Vessels can be supplied from pipe-lines whilst working at all berths, including the Matola Appliance and Tanker jetty, but excluding the new wharf extension, where pipes have been laid but the system is not yet ready for delivering bunkers. The rate of delivery varies between 300 to 500 tons per hour depending on the type of vessel taking bunkers. At present, supplies of gas oil and marine diesel oil are not in very plentiful supply, recommended to stem as far in advance as possible.

MEDICAL: No advance notice required for medical attention, unless urgent assistance necessary. Hospital facilities available. Crew members and passengers should be in possession of valid smallpox and yellow fever certificates (cholera certificate too if cholera area) on international forms. Vaccination/fever inoculations and certificates may be obtained ashore if required. Men for sick parade must first go through the port doctor whose hours are week-days 0800–1130 hrs. and 1400–1730 hrs.; Saturdays 1000–1130 hrs., but always available on an emergency call.

REPAIRS: No dry dock except for small coasters. Facilities for most normal work, except underwater rivetting, cutting and welding, and shaft balancing.

DEVELOPMENTS: Administration are considering the construction of a deep-sea port on the coast between Inhaca Island and the Natal border. This port will be mainly used by coal and iron-ore carriers and have a capacity of approximately 6 million tons per annum.

CONSULS:

U.S.A.
U.K.
France
Norway
Sweden
Switzerland
Italy
South Africa
Brazil
Germany
Spain

IDENTIFICATION CARDS: Crew and passengers are issued with Immigration Boarding Permits and they must be carried at all times. (Such permits to be returned to Immigration Officer prior to sailing.)

WATCHMEN: Strongly recommend employing services of a local watchman, who will also control visitors and labour passes.

OPENING/CLOSING HATCHES: Can be done by either crew or stevedores. Often done by crew.

CERTIFICATES: Tonnage Certificate to be produced to Pilot, as certain port dues are based on vessel's registered tonnage.

REPATRIATION: Facilities exist for nationals of those countries maintaining diplomatic relations with Mozambique. A valid passport and visa is necessary as immigration authorities do not recognise a Seaman's Book as being a valid travel document.

AIRPORT: About 5 miles from centre of town.

CUSTOMS ALLOWANCES: Bonded stores are usually not sealed.

HOLIDAYS: No cargo work on 1st January and 25th December, on other holidays, work continues normally in the port.

TIME: Local time 2 hours ahead of GMT. No alterations made to clocks during the year.

SHORE LEAVE: Crew members are allowed ashore, from 0600–2400 hrs. excepting nationals of those countries not maintaining diplomatic relations with Mozambique.

TELEPHONES: A telephone will be placed on board the vessel.

GENERAL: Crew and passengers not to take photographs in the dock area. Permission through Agent required to lower any boats or gear overside into the water or on to the wharf.

Do not immobilize main engines or carry out engine trials at the wharf until permission has been obtained by the Agent as the Authorities require vessels to maintain sufficient steam for main engines to be used at 2 hours notice.

Customs guards to be supplied with meals and accommodation whilst at inner anchorage and alongside the LM wharf otherwise cost per guard will have to be paid by Agent on Owner's behalf.
AUTHORITY: Capitania do Porto de Maputo.

MOZAMBIQUE: 14.58 S. 40.45 E.

DOCUMENTS:
- Customs Clearance from last port.
- Port Clearance.
- Health Certificate.
- 6 Crew Lists.
- 6 Passenger Lists in Transit.
- 7 Passenger Lists Disembarking.
- 2 Stores Lists.
- 2 Lists Deck Stores.
- 2 Lists Cargo in Transit (main items of cargo only).
- 6 copies of Manifest of Mozambique Cargo.

PILOTAGE: One Pilot available, 24 hrs. Pilot boat is black and grey. Ships take Pilot near buoy No. 2 (Red Buoy) placed off Goa Island. At night ships should send Morse signals with Aldis lamp to the middle of Mozambique Island (location of Port Office). ETA should be given as soon as possible to Pilot station off Mozambique Island and/or to ship's Agent.
ANCHORAGES: When waiting for Pilot, or in reason of their draft (more than 30 ft.) ships may drop anchor off red buoy No. 2 (0.5 miles seawards). Depths between 60 and 90 ft. Bottom with sand and some broken coral; current from North to South, sometimes up to 4 knots.
MAX. SIZE: Only ships with drafts less than 30 ft. can cross the bar and enter the Port.
HEALTH: Quarantine flag should be flown, even after calling at other ports in this country. Health Certificate given by Pilot.
RADIO: Radio Mozambique call sign CRQ. Also available Maputo or Beira Radio Stations.
TUGS: Tugs are not necessary in this port.
BERTHING: No quay berths. Vessels work cargo at anchor.
STEVEDORES: All requirements on this purpose must be sent to the Agent.
MEDICAL: Medical assistance can be given at any time, even to vessels unable to cross the bar because of draft. Hospital with adequate facilities, and emergency services available.
FRESH WATER: Always available in any quantity. Supplied by barge of 40 tons capacity.
FUEL: Small quantities available.
OPENING/CLOSING HATCHES: By stevedores.
CARGO GEAR: Vessels anchor in bay and load and discharge by lighter and barges.
IDENTIFICATION CARDS: Required.
CONSULS: No local representatives.
REPAIRS: Light repairs can be effected.
REPATRIATION: All facilities available.
AIRPORT: Situated about 7 km. from Mozambique. Connections to Beira and Maputo every day.
HOLIDAYS: 1st January; 2nd March; 1st and 10th June; 15th August; 5th October; 1st November; 1st December; 8th December; 25th December. Cargo handling can be arranged on these days.
POLICE/AMBULANCE/FIRE: Maritime Police, Customs and Agents will always be on board during stay.
TELEPHONES: No telephones, but walkie-talkies are available; arrange with Agent.
AUTHORITY: Capitania do Porto de Mocambique.

NACALA: 14.32 S. 40.37 E.

PORT LIMITS: The line joining Ilha Goman to Cabo Columulomo Light at the entrance of Bay of Fernao Veloso.
DOCUMENTS:
- Customs Clearance from last port.
- Port clearance from last port.
- Health Certificate.
- 6 Crew Lists.
- 6 Lists Passengers in transit.
- 7 Lists Passengers Disembarking.
- 2 Stores Lists.
- 2 Lists Deck Stores.
- 2 Lists Cargo in transit (main items of cargo only)
- 6 copies of Manifests of Nacala Cargo.
- 2 Lists of Dangerous Cargo.

PILOTAGE: Permanent and compulsory for entering harbour. Pilot boat situated at harbour entrance.
ANCHORAGE: Fine natural harbour. Entrance half a mile wide, depths up to 60 m. Good anchorage for any size vessels. Sand and mud bottom.
MAX. SIZE: For anchoring, no restrictions. For berthing, up to 31 ft. draft.' **RADIO:** Radio Naval Nacala operates permamently on 2182 kHz.
HEALTH: Vessels to radio "Sanidade Maritima", their ETA and "All Well" (or otherwise). If "All Well", Health Certificate given by Pilot.
TUGS: One available, 1,000 h.p.
BERTHING:
Old Wharf: There is a pier with berths for four vessels with a length of 426 m.

Depths:	Wharf 1: 24 ft.		
	,, 2: 21 ft.		
	,, 3: 30 ft.		
	,, 4: 30 ft.		
Cranes:	12 cranes available		9×5 tons
			2×10 tons
			1×20 tons

New Wharf: There is a pier to berth two vessels.
Depth: 45 ft.
Cranes: There are no shore cranes available at this stage.

CRANES: 12 electric cranes with capacity 1 to 20 tons. 1 Floating crane with capacity of 25 tons. 16 Mobile cranes with capacity 2 to 7 tons.
STEVEDORES: Working hours 0700 to 1100 hrs., 1300 to 1700 hrs. Overtime 1900 to 0600 hrs.. Two local stevedoring firms.
FRESH WATER: Available from hydrants on the quay at the old wharf.
FUEL: Available from connections on the quay. Must be ordered well in advance. Only Gas oil available.
MEDICAL: No advance notice required for medical attention, unless urgent assistance necessary. Hospital facilities available. Crew members and passengers should be in possession of valid smallpox and yellow-fever certificates (cholera certificate too if from cholera area) on international forms. Vaccination/fever inoculations and certificates may be obtained ashore if required.
GANGWAY/DECK WATCHMEN: Compulsory, under supervision of Immigration Department.
OPENING/CLOSING HATCHES: Can be done by either crew or stevedores. Often done by crew.
CERTIFICATES: Tonnage Certificate to be produced to Pilot, as certain port dues are based on vessel's registered tonnage.
REPATRIATION: Facilities exist for nationals of those countries maintaining diplomatic relations with Mozambique. A valid passport is necessary as immigration authorities do not recognise a Seaman's Book as being a valid travel document.
TIME: Local time 2 hours ahead of GMT. No alterations made to clocks during year.
SHORE LEAVE: Crew members are allowed ashore, excepting nationals of those countries not maintaining diplomatic relations with Mozambique.
HOLIDAYS: New Year's Day (1st January); National day of Portugal (10th June); Corpus Christi (variable date); Assumption (15th August); Nacala City Holiday (16th September); Republic Day (5th October); All Saints' Day (1st November); Restoration of Republic (1st December); Immaculate Conception (8th December); Christmas Day (25th December). No cargo work on 1st January and 25th December; on other holidays work continues normally in the port.
DEVELOPMENTS: A new pier: length 462 m., depth 45 ft. under construction. It will be equipped with 14 cranes with 5, 10 and 20 tons capacity.
AUTHORITY: Capitao do Porto de Nacala.

PEMBA: 13.00 S. 40.28 E.

DOCUMENTS:
- 6 Crew Lists.
- 6 Lists of Passengers Disembarking.
- 6 Lists of Passengers in Transit.
- 1 Master's Declaration.
- 1 Stores and Provisions List.
- 1 Health Declaration.
- 5 Sets Cargo Manifests.
- 2 Sets non-negotiable Bills of Lading.
- Clearance Documents from last port.

PILOTAGE: It is necessary to order by radio request to Agent 14 hours before arrival.
ANCHORAGE: Vessels may anchor South of the dock about 300 m. off. Other suitable anchorages will be indicated by the Pilot.
RESTRICTIONS: Vessels may enter with Pilot at any hour day or night.
MAX. SIZE: Draft up to 27 ft. 6 in. for berthing.
HEALTH: In case of contagious disease on board, the Port Health Authorities must be advised in advance.
RADIO: Send messages through Beira radio.
TUGS: None available
BERTHING: One berth, length 182 m., depth alongside 28 ft.
STEVEDORES: In ETA message to Agent, indicate number of gangs required and advise quantity and description of cargo for discharge.

MEDICAL: In case of urgency advise Agent by radio before arrival. Hospital facilities available. Vaccinations can be performed.
FRESH WATER: Available.
FUEL: Available.
GANGWAY/DECK WATCHMEN: Not necessary as there is a permanent guard on board.
OPENING/CLOSING HATCHES: Performed by stevedores.
CUSTOMS ALLOWANCES: Bond is not sealed and no restrictions made.
IDENTIFICATION CARDS: Required by police.
REPATRIATION: Can be arranged.
AIRPORT: Situated 7 km. away. Flights to Beira and Maputo daily.
TIME: GMT plus 2 hours. No alterations during the year.
HOLIDAYS: No work performed from 1700 hrs. Christmas Eve until 0600 hrs. 26th December; no work performed from 1700 hrs. New Year's Eve until 0600 hrs. on 2nd January. Work may be arranged on the following holidays: 1st January, 3rd February, 7th April, 1st May, 25th June and 25th September.
POLICE/FIRE/AMBULANCE: Police, tel. 2828; Hospital, tel. 2211.
SHORE LEAVE: Allowed. Except for nationals of countries not maintaining diplomatic relations with Mozambique.
AUTHORITY: Capitao do Porto de Pemba.

NOTES

Please also advise Shipping Guides Ltd.

Nauru Island

NAURU: 00.32 S. 166.56 E.

DOCUMENTS:

International Declaration of Health, 1 copy.
Clearance from last port.
Crew Lists, 2 copies.
Passenger Lists, if any, 2 copies.
Manifest, 1 copy.

PILOTAGE: Pilotage is available on request without charge; Masters are advised to avail themselves of this service. It is necessary that Masters, through Radio Nauru, inform telegraphic address Nauruphos Nauru of ETA 48 hours before arrival, confirming or altering this 12 hours before arrival. Nauruphos will reply through Radio Nauru on receipt of second message giving time for the vessel to close in to 0.5 mile West of loading plants, where Pilot will board. In case of adverse weather or congestion, Masters will be notified by radio, or by VHF Channel 16, 156.8 Mc/s with range of about 40 miles. Vessels are handled inwards in daylight only, and should fly flag when approaching island. A safe and clean pilot ladder should be provided, a good lee made for the Pilot to embark.

ANCHORAGES: No anchorages are available owing to the extreme depths of water. Vessels waiting normally drift off and return at daybreak or when instructed to do so.

RESTRICTIONS: Tide and draft have no bearing on entry but it is normal not to handle vessels into berth in darkness. However, vessels are unmoored at all hours.

MAX. SIZE: Vessels have been handled up to an overall length of 630 ft. Beam should not exceed 90 ft., but there are no draft limitations.

HEALTH: Masters of vessels approaching Nauru are required to send a telegram addressed to the Quarantine Officer, Nauru within 24 hours of arrival. The telegram should state the name of last port, date, presence of any infectious disease. On receipt of telegram, the quarantine officer will send reply indicating whether or not pratique is granted. It is still necessary to fill out the International Declaration of Health and hand this to Boarding Officer after berthing.

RADIO: Nauru Radio station, call sign C2N. Should, through atmospheric conditions, difficulty be found in raising Nauru, it is suggested that the message be passed through Sydney or any other convenient coastal station. Port Radio VHF, calling Channel 16, working Channel 12, permanent service.

TUGS: No tugs available for berthing.

BERTHING: Such special requirements which relate to berthing in the port are contained in a Letter of Advice to Ship Masters issued by the BPC. Shore labour normally boards the vessel with the Pilot to assist in mooring to the buoy system.

STEVEDORES: As stevedoring is carried out by Nauruphos, no separate advice is required. Loading rate of bulk phosphate is as high as 3,000 t.p.h.

MEDICAL: Medical treatment can be given at short notice. Limited hospital facilities are available, and emergency surgery can be carried out. Smallpox vaccination is required, and cholera if the vessel has come from an infected area.

TANKERS: Lengths and drafts as for bulk phosphate vessels. 8 inch discharge line to shore storage tanks.

DENSITY: Normal salt water all states of tide.

FRESH WATER: Island water is imported, and water will be supplied only in cases of emergency.

FUEL: Island stocks are imported for use in the phosphate industry, and only limited quantities of heavy fuel or diesel oil can be made available in cases of extreme urgency.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Carried out by crew.

SHIP CERTIFICATES: Deratisation certificate only.

CUSTOMS ALLOWANCE: No restrictions apply.

CARGO GEAR: Cargo gear should be up to the standard demanded in Australian ports.

CREW IDENTIFICATION CARDS: Some form of identification, passport, discharge book, or identity card should be carried by Crew members.

CONSULS: An Australian Representative is resident on the Island.

REPAIRS: The phosphate industry requires good workshop facilities of various kinds for maintenance of their own heavy plant and such workshops are kept busy at all times. Small repairs such as welding, brazing, lathe work, etc., can be carried out, but only when essential to allow the vessel to proceed on its voyage. Main engines cannot be immobilised whilst the vessel is moored to any section of the buoy system.

REPATRIATION: Repatriation can be arranged. No facilities for crew changes.

AIRPORT: Air Nauru operates a twice weekly service to Melbourne and Hong Kong. Other routes include Fiji, Majuro, Japan, Samoa, Vila, Honiara and Taiwan.

TIME: Local time is GMT plus 11.5 hours. No alterations during the year.

HOLIDAYS: Christmas Day, New Year's Day, and Good Friday are normally closed holidays. Other National holidays occur during the year but normally work carries on, on these days.

POLICE/AMBULANCE/FIRE: All emergencies are handled by the Harbour Masters, one of whom remains aboard the vessel throughout the time the vessel is attached to the mooring system.

TELEPHONES: Telephones are put aboard for the use of island staff working the vessel.

SERVICES: No special services available.

SHORE LEAVE: This may be granted at the discretion of the Master but should in all cases terminate at 1700 hrs.

PORT REGULATIONS: No vessel may immobilise main engines whilst moored to the buoy system. Main engines should be on instant readiness, deck power should be available at all times, and the vessel must proceed to sea when instructed to do so by the Harbour Master.

DELAYS: Normally no delays should be expected. Vessels could wait a day, or possibly 2 due to port congestion, but this seldom happens; delays can occur due to adverse weather, the duration of which is unpredictable.

AUTHORITY: The Harbour Master, appointed by The Nauru Phosphate Corporation, Nauru.

NOTES

Please also advise Shipping Guides Ltd.

AMSTERDAM: 52.22 N. 04.54 E. (See Plan Book)

PORT LIMITS: Notices of Readiness will only be accepted (subject to C/P terms) if vessel has actually arrived at Amsterdam, which means that vessels have to enter from sea and pass the locks at Ijmuiden, proceeding through the North Sea Canal to Amsterdam. There are various buoys and quays available where vessels can be moored waiting for final discharging berth.

DOCUMENTS:

Health Certificate. Forms obtainable from sea Pilot.
Crew List in triplicate.
2 copies of Crew Manifest for cigarettes, cigars, spirits, etc., belonging to crew.
Passenger List in triplicate.
1 copy of Manifest.
1 copy of Bills of Lading.
Dangerous Cargo List.
Ship's Register.
1 copy Stores List.

PILOTAGE: Pilotage is compulsory. A pilot vessel cruises at sea in the vicinity of Ijmuiden between the light whistle buoy and the moles.

In order to avoid delays, Masters who require a Pilot must advise their ETA not less than 4 hours in advance to "Pilotage Ijmuiden". This advice must be amended, if vessel's ETA changes more than 2 hours from the original advice.

The text of the message must contain: *(a)* the words "ETA-pilot", *(b)* expected time arrival (group of 4 figures) in middle European time, *(c)* draft with indication of unit applied, *(d)* port of destination.

"Pilotage Ijmuiden" can be informed via Scheveningen Radio or via VHF Channel 12. Pilotage and navigation is possible at night.

Pilotage by Helicopter: When the pilot service by pilot cutter has been suspended owing to weather conditions it is possible to take a Pilot on board vessels by helicopter. Helicopter pilotage is carried out for vessels which have an obstacle free hoisting area on deck of min. 15 ft. diameter. Deck plans should be provided in advance.

Restrictions:

1. Min. visibility 800 m. at 150 ft. above sea level.
2. Max. wind force 10 (55 kts.).
3. Severe turbulence and icing conditions at or below 150 ft.

Pilot Ladders: Pilots strictly adhere to regulation 17b, Chapter V of the International Convention for the Safety of Life at Sea, which reads as follows:

"Whenever the distance from sea level to the point of access to the ship is more than 30 ft. (9 m.), access from the pilot ladder to the ship shall be by means of an accommodation ladder or by another equally safe and convenient means."

ANCHORAGE: Anchoring in Ijmuiden outer harbour, North Sea Canal and in harbour of Amsterdam is prohibited.

RESTRICTIONS: Entry possible at night. Official max. draft is 43 ft. (salt water). By permission of Government Harbour Master at Ijmuiden it is possible to enter with max. draft 45 ft. (S.W.). Such permission to be applied for at least 14 days prior to arrival.

MAX. SIZE: Vessels proceeding to Amsterdam have to pass locks at Ijmuiden. Dimensions of Northern lock (biggest): 1,312 ft. long, 164 ft. wide 49 ft. 2 in. deep.

RADIO: Cable Agents giving ETA draft, cash and other requirements via Scheveningen Radio/PCH.

RADAR/VHF: Harbour radar is installed at Ijmuiden. In bad visibility radar assistance will be given for incoming ships day and night. A radio portophone is provided by Pilot. Direct communication between incoming and outgoing ships and commanding post of locks is possible by means of VHF radio telephone, Channel 11. Government patrol boats are also equipped with VHF installations. The Radio-Radar Station (Redeplot) can also be contacted via VHF Channel 12 before approaching Ijmuiden.

Gemeentelijk Havenbedrijf (Port Management) on VHF Channel 14 day and night.

TUGS: Sea-going tugs available between piers at Ijmuiden assisting vessels, into locks or outer harbour. Harbour tugs available in locks assisting vessels to Amsterdam. The rates include use of tug hawser.

BERTHING: Possible at night. If no berth available vessels may be moored on buoys.

BRIDGES: Vessels proceeding to Oil Harbour, Coen Harbour, Vlot Harbour and installations in Eastern part of port pass railway bridge over North Sea Canal at Zaandam. Notices indicating distance from bridge have been placed at 500 m. at either side and notices to stop at 150 m. at West side and 225 m. at East side. When bridge closed Masters must stop their ships and must on no account proceed unless signal is given that passage is allowed. Bridge is opened regularly in accordance with time-table of Netherlands Railway.

STEVEDORES: In order to enable Agents to order gangs in time it is recommended to keep Agents duly informed about ETA. No ETA to stevedores necessary.

MEDICAL: If immediate medical assistance will be required in the locks at Ijmuiden, Agents must receive advance notice.

BULK HANDLING FACILITIES: *Grain:* The Silo installation of IGMA at Vlothaven depth alongside 49 ft. 3 in., has main jetty 1,200 ft. length to accommodate 2 vessels up to 80,000 tons d.w.t. Ships unloaded by 4 mobile pneumatic suckers, with capacity 400 t.p.h., and 3 floating elevators. Daily discharge capacity about 17,000 tons.

On discharging side maximum gear height above water line 92 ft. On loading side maximum gear height above water line 36 ft.

Ore, Coal, etc: NV Overslagbedrijf Amsterdam in West harbour, quay 2,600 ft. length, max. draft 45 ft. (SW).

Discharging rate of gear up to 60,000 (Coal) and 100,000 (Ore) tons per 24 hours. Loading rate about 2,000 t.p.h.

Maximum outreach of loading and discharging gear 164 ft.; max. height of loading discharging gear above water level 80.5 ft. Four high speed gantry cranes in use.

NV Havenbedrijf Rietlanden Quay length 2,500 ft. depth 35 ft. Capacity about 15,000 tons per day.

Phosphate: Albatross Fertiliser Works Jetty, depth alongside 31 ft. Two grab cranes with daily capacity of 7,000 tons.

Containers: Length of quay 1,088 m. Roll-on/roll-off berth: 140 m., depth alongside quay 36 ft.

The berth is equipped with 3 gantry cranes with lifting capacity of 50 tons and 1 multi-purpose crane with a capacity of 30 tons and 4 cranes with a capacity of 5 tons.

Ferry Terminals (Roll-on/Roll-off terminals): Scandia Terminal in the Suezhaven, 10.5 nautical miles from the sealocks in Ymuiden. Total area 50,000 sq. m., marshalling area 28,000 sq. m., quay length 400 m. shed space 2,300 sq. m., modern passenger building.

Combined Terminals Amsterdam B.V. (C.T.A.)

Berth No. 1: Length 250 m. Depth 13 m.
No. 2: Length 215 m. Depth 11.5 m.
No. 3: Length 140 m. (Ro/Ro) Depth 11.0 m.
No. 4: Length 290 m. Depth 11.0 m.

Equipment: 2 Portainers, capacity 50 tons. 2 rail-mounted dock cranes capacity 30 tons at 20 m. outreach and 12 tons at 40 m. outreach. 2 rail mounted transtainers, capacity 35 tons and 45 tons. 40 reefer points.

Another terminal is located in the Coenhaven, 11 nautical miles from the sea-locks in Ymuiden. It is equipped with a ramp with movable link span (twin construction), 40 ft. wide and 63 ft. long and has 2 more berths for roll-on/roll-off vessels. The water depth is 33 ft. The terminal also includes a passenger hall (1,000 sq. m.), 3 ha (7.5 acres) of parking space and ample shed space. A mobile container crane (35 tons capacity), side-loaders (20 tons), tug musters, slave trailers, flats, containers and fork-lift trucks are available.

Molasses: Tradax–2 jetties, max. draft 11.30 m. receiving capacity 1,000 t.p.h. Max. d.w.t. 65,000 tons (approx.). Connections 8 in.

Minerals: Eggerding & Co. B.V. Length of quay 400 m. Depth alongside 33 ft. Discharge is carried out by floating cranes.

TANKERS: *Ijmond B.V.:* 1 jetty for 2 vessels of 100,000 tons. Max. draft 44 ft. 6 in. Pipe-line connection 6 in. and 8 in. Receiving rate 2,000 t.p.h. Loading rate 2,000 t.p.h. depending on grade and condition. Fresh water available from jetty, fuel by barge. Stores by barge or trucks. (Jetty not accessible to trucks). Dirty ballast by barge.

Mobil: 2 jetties, 1 for vessel of 30,000 tons and another for vessel of 80,000 tons. Max. draft 44 ft. 6 in. Pipe-line connections 10 and 12 in.

One jetty for coast tankers or LPG tankers up to 2,500 tons.

The receiving rate for crude oil is 4,000 cu. m./hr. The loading rate varies from 400–1,900 cu.m/hr. depending on grade.

Fresh water available from jetty. Fuel available, pipe-line 8 in. Facilities available for dirty ballast if vessel to load at berth. Max. capacity 10,000 tons. Stores by barge or truck (Jetty not accessible to trucks).

Amatex: 4 jetties, depth alongside 32–41 ft. Pipe-line connections 6 in. – 12 in.

Receiving rate, 4–1,200 t.p.h. depending on grade and back pressure, if any. The loading rate is about 1,000 t.p.h. depending on grade.

Fresh water available by barge. Fuel available by barge. There are facilities for dirty ballast under special conditions. Stores mainly by truck (Jetties not accessible to trucks).

Comos: Two jetties, depth alongside 42 ft. Pipe-line connections 8 in. and 12 in. Four jetties available for seagoing vessels and barges up to a max. draft 14 ft. 9 in.

The receiving capacity is about 2,000 t.p.h. and loading rate up to about 1,000 t.p.h.

Fresh water available by barge. Fuel available by barge or pipe-line. Stores by truck. There are no facilities for dirty ballast.

Smid & Hollander: One jetty for receiving crude oil, max. draft 36 ft. 2 in. Fresh water and fuel available by barge. Stores by truck (Jetty not accessible to trucks).

Noord Europees Wijnopslagbedrijf B.V.: One jetty, depth alongside 20 ft. Fresh water and fuel available by barge. Stores by truck.

DENSITY: Amsterdam is not a tidal port. The water is brackish to fresh.

FRESH WATER: Drinking and boiler water can be supplied by barge, or if connection available, from shore. Price depends on quantity ordered.

FUEL: All grades of fuel are available. Advance notice 48 hours.

FIRE PRECAUTIONS: No repair work to be carried out to tankers without permission of Harbour Authorities. Usual non-smoking precautions, etc.

GANGWAY/DECK WATCHMEN: Not required. Dependent on commodity of cargo.

OPENING/CLOSING HATCHES: Liner vessels by crew or by stevedores, payable per man per hour. Tramp vessels as per Charter Party.

CERTIFICATES:
Ship's Register.
Usual Cargo Certificate.
Safety Radio.
Safety Equipment Certificate.
Crew Roll.
All usual certificates required for navigation.

CUSTOMS ALLOWANCES: Tobacco: 200 cigarettes per man or equivalent of tobacco or cigars. Wine and/or Spirits: 5 litres of wine per man. Spirits: total 5 litres for the whole ship.

CARGO GEAR: Usual cargo certificate.

IDENTIFICATION CARDS: Not needed.

CONSULS: Nearly all countries have established consulates at Amsterdam.

REPAIRS: All types of deck and engine repairs are possible including gas-freeing and tank-cleaning.

DRY DOCKS: NDSM: 4 dry docks, largest of which length 817 ft. breadth 120 ft., depth 28 ft. Capacity 72,000 d.w.t.

ADM: 5 floating docks largest of which length 677 ft. breadth 97 ft. 6 in., lifting capacity 40,000 tons d.w.t.

Other floating docks available for vessels up to 4,500 tons.

REPATRIATION: Facilities for repatriation of crew to any destination are available.

AIRPORT: Distance to Schiphol Airport (served by regular airlines) 15 km.

TIME: GMT plus 1 hour. No alterations during the year.

HOLIDAYS: New Year's Day; Easter Monday; Queen's Birthday (April 30th); Ascension Day; Whit Monday; Christmas Day and Boxing Day.

Cargo can be worked during these days subject to labour being available at premium rates.

POLICE/AMBULANCE/FIRE: Police 222222; Ambulance 355555; Fire 666666.

TELEPHONES: Telephone connections on board are only possible on certain quays (passenger ships). It is possible to rent portable mobilophones.

SERVICES: 1 tank cleaning installation, compass adjusting/direction finder calibration, representatives of all leading radio installations, radar and other nautical instruments available.

SHORE LEAVE: Crew members allowed ashore.

DELAYS: Usually no congestion.

AUTHORITY: Gemeentelijk Havenbedrijf Amsterdam. (Port Management of Amsterdam)

AGENT: Wm. H. Muller & Co. Amsterdam B.V., "Havengebouw", 7 De Ruyterkade, P.O. Box 182, 1000 AD, Amsterdam. Telegrams "Mineral" Telex 12058. Tel. (020) 26 34 56.

DELFZIJL: 53.20 N. 06.54 E. (See Plan Book)

LOCATION: On the estuary of the River Ems, opposite Emden.

DOCUMENTS: See "Rotterdam".

PILOTAGE: Pilot boats normally cruise at Wester-Ems buoy. During bad weather they withdraw into estuary, but never further than Borkum Roads. Pilot boats listen on Channel 6 and pilot office on Channel 14 VHF; distance from pilot station to Delfzijl 32 miles. Pilot service compulsory for all vessels drawing over 22 dm. Foreign vessels may call Pilot on 2182 kHz. and Netherlands vessels on 2391 kHz. Traffic between the cutter and the vessel will be held on 1657 kHz.

Approaching vessels from sea should inform the Pilot commissioner of their ETA in M.E.T. with a notice at least 4 hours in advance via Scheveningen – Radio (PCH); the pilot cutter may be informed via VHF.

The ETA message should contain the following details: *(a)* ETA Pilot Westereems (time in M.E.T. in a group of 4 figures); *(b)* Draft; *(c)* Port of destination.

Departing vessels should apply for a Pilot at least one hour before ETD; the request should be made to the office of the Inspector of Pilotage.

Pilotage from Delfzijl to Emden is not compulsory. On request however a Pilot may be put at the Master's disposal for a trip to Emden. This is not applicable for a trip from Emden to Delfzijl or Eemshaven.

ANCHORAGE: Vessels up to 4,000 tons d.w.t., which for some reason have to anchor outside the piers can do this East of the harbour entrance near Oterdum. Anchorage is situated within the following area: a line connecting the buoys BW 13 – BW 15 – BW 26 – PS 2. Request for anchorage at the office of the Harbour Master, VHF Channel 14. Larger vessels should seek an anchorage in the Doekegat. There is no anchorage inside the harbour.

ENTRANCE: New harbour entrance lies opposite the village of Oterdum about 5.2 m. South-east of the old entrance. The new entrance extends to reach the deep water of the Bocht van Watum, and lies at a point about 600 m. West of the dredged channel between the Bocht van Watum and the Oostfriese Gaatje near Paapsand Sud.

New harbour entrance has an initial depth of N.A.P. –10 m., and a bottom width of 200 m. The harbour channel has the same depth, and a width of 100 m.

Depths: All depths are indicated in relation to N.A.P. LLWS at Delfzijl lies 2.03 m. below N.A.P. (Normal Amsterdam Level).

Tides: The rise at Springs is 3.05 m. and at Neaps 2.35 m. Tidal movement is diurnal with an average range of 2.7 m.

MAX. SIZE: The new harbour entrance has a depth of 8 m. at LLWS. Vessels drawing up to 9 m. can enter under normal HW circumstances; a keel clearance of about 1 m. will be maintained. Masters of vessels with large draft are recommended to contact the Pilot Service in good time with regard to the water level to be expected near Paapsand-Sud and in the Zeehavenkanaal. In the harbour "always afloat" can be guaranteed along the entire length of the Handelskade West for vessels with a draft up to 8.7 m. See "Depths" above.

TUGS: Tugs up to 900 h.p. available. Additional tugs can arrive within 3 hours from Emden.

RADIO: Cable to Agents via Radio Scheveningen. PCH.

VHF: The Harbour Master's office is equipped with a VHF installation, Channel 14. The station is constantly manned.

BRIDGES: Bridge to the Damsterhaven may always be worked. Bridge to the Oosterhornhaven will be handled from Monday to Saturday. On Sunday bridge may be opened on special request.

BERTHING: The Outer Harbour is divided into 3 communicating basins: Handelshaven, Balkenhaven and Zeehavenkanaal.

Handelshaven, in the western part of the Outer Harbour, has a deepwater quay, 520 m. long, with a depth of 11 m. alongside, 2 mooring buoys in a depth of 11 m. also jetties 110 and 130 m. in length, with a depth of 7 m. alongside.

Balkenhaven, East of Handelshaven, has depths of 8.5 m. to 5.5 m.; there are berths at several mooring buoys for small sea-going vessels.

Zeehavenkanaal is the eastern part of the Outer Harbour and is being developed as a deep-sea harbour; it has a depth of 11 m. There are several private mooring facilities in the Sea Harbour Channel, from West to East:

a. Private quay of Wagenborg Terminal B.V. with a depth of 7 m.;
b. Private jetty of the Alcohol Factory with a depth of 12 m. Tankers up to 25,000 tons d.w.t. can be accommodated here. Depth alongside 12 m.;
c. Private jetty of AKZO is equipped with a loading station with a loading capacity of 500 tons salt/hour. Ships up to 25,000 tons d.w.t. can be accommodated here; depth alongside 12 m.;
d. Private jetty of the Methanol Chemie Nederland (M.C.N.) equipped with a loading station with a loading capacity of 500 tons of methanol per hour. Tankers up to 20,000 tons d.w.t. can be accommodated here; depth alongside 10 m.;
e. Private jetty of the Aluminium Factory equipped with cranes is able to accommodate ships up to 30,000 tons d.w.t. Depth alongside is 12 m.

The Oosterhornhaven behind the dyke is a basin with a total length of 3,100 m. and a width of 60 m.

Navigating Oosterhornhaven is prohibited for vessels having an LOA exceeding 75 m. and/or having a maximum beam exceeding 12.50 m. and for having a draft exceeding 4.50 m., unless a special permission is obtained from the Harbour Master subject to certain conditions.

Amongst others there are mooring facilities located in this canal alongside the yard of Azko and Methanol Chemie, equipped with loading installation and a tanker jetty.

The Eemskanaal:
Several private mooring facilities are located here. These are the following:

Name	*Type*	*Suitable for*
Jonker's Terminal	Potatoflour, bulk term	Coasters
Aankoop Centrale	Grain elevator	Coasters
Terminal Delfzijl	Timber Terminal	Coasters
C.Z.G.B.	Stevedores	Coasters
B.P.	Oil storage	Inland vessels
Gulf	Oil storage	Inland vessels/Coasters
Eemsmond	Cement factory	Inland vessels
Jansen Continental	Grain elevator	Coasters

The Sea Locks:
The link between the Outer Harbour and the Eemskanaal and also the Oosterhornhaven of the port area is formed by the provincial sea locks. Sea-going vessels up to 6,000 tons d.w.t. with a beam of 16 m., a length of 120 m., and a draft of up to 5 m. can use these locks. As this will generally apply to vessels in ballast, the locks for this size of vessel are only of importance for the Groningen shipyards.

For loaded vessels, the limit lies between 2,000 and 2,200 tons d.w.t. In the Outer Harbour of the locks sufficient berths have been provided for vessels waiting to pass through the locks.

Dimensions of locks:

The Western (small) lock has a length of 123 m. at falling tide and 81 m. at rising tide, a width of 7 m., a depth of sill outside 4.2 m. inside 2.4 m.; across each lock head lies a bascule bridge. The Eastern (large) lock has a length of 120 m., a width of 16 m., depth of sill 5.4 m.; across each lock head lies a drawbridge. The opening times of the locks are continuous on weekdays.

Sheds and warehouses:
There are several sheds and warehouses (total capacity: 3,250 sq. m.); also open storage. Grain silo with a storage capacity of 2,000 tons loose and 500 tons in bags. Also several private sheds, warehouses and grain silos.

CRANES: There are about 15 shore cranes with capacities up to 12.5 tons and a floating 60-ton crane.

STEVEDORES: *Working hours:*

	Combination of shifts possible:
Morning shift 08.00 – 12.00	*1. Morning shift+afternoon shift*
Afternoon shift 13.00 – 17.00	*2. Afternoon shift+evening shift*
Evening shift 17.30 – 21.30	*3. Evening shift+1st night shift*

1st night shift 22.00 – 02.00 *4. 1st night shift+2nd night shift*
2nd night shift 02.30 – 06.30 *5. Extra shift+morning shift*
Extra shift 03.30 – 07.30 *Double shift:*
from 05.00 – 13.30 and
from 13.30 – 22.00
Each shift half an hour's break

Work on Saturdays and Sundays:
Work on Saturdays and Sundays can be arranged in the same manner as this is done in the ports of Rotterdam and Amsterdam, *viz.* in consultation with the stevedores.
DENSITY: Ranging between 1007 and 1020, depending on the tide.
FRESH WATER: Water obtainable alongside the quays or can be delivered by motor tankers.
FUEL: Fuels in limited quantities for coasters are always available. For bunkering of larger vessels, arrangements should be made in advance.
GANGWAY/DECK WATCHMEN: According to police regulations, Master has to keep watchmen on board.
AIRPORT: Eelde (Groningen).
OPENING/CLOSING HATCHES: Normally carried out by ship's crew.
CONSULS:

At Delfzijl		*At Groningen*	
Denmark	tel. 05960–16333	Belgium	tel. 050–138222
Finland	tel. 05960–16800	Germany	tel. 050–139922
France	tel. 05960–13778	Norway	tel. 050–189444
Sweden	tel. 05960–16333	Spain	tel. 050–137879

REPAIRS: Most engine and deck repairs can be carried out by two local shipyards.
DRY DOCKS: Dry-docking is limited to ships up to 3,000 d.w.t. with a draft not exceeding 32 dm. For larger vessels, dry-docking facilities exist in the nearby port of Emden (Germany).
CERTIFICATES: The tonnage certificate should be shown to Harbour Master on first call every year.
HEALTH, MEDICAL ATTENDANCE, HOLIDAYS, LOCAL TIME, CUSTOMS ALLOWANCES: See "Rotterdam".
REGULATIONS: *Regulations for arrival and departure of sea-going vessels:*

1. The arrival of a sea-going vessel, other than vessels passing through the port, must be reported in writing by the Master, or his local representative at the Harbour Master's office twenty-four (24) hours prior to arrival;
2. The declaration of arrival must contain:
   a. name and flag of vessel,
   b. nature and amount of the cargo to be discharged and/or loaded;
   c. dangerous goods, according to the IMCO code;
   d. last port of call;
   e. ETA and next port of call.
3. Declaration of arrival must be made on the special forms or per teleprinter (53299 HSDDZ);
4. At least three hours before departure the Master, the shipping company or its local Agent must notify the Harbour Master's office of the intended departure, stating the estimated time of departure and the destination of the vessel.

AUTHORITY: Port of Delfzijl Authority.
AGENTS: Maritima Scheepvaart en Handelmaatschappij B.V., De Vennen 52, Delfzijl. Tel (05960) 18989. Cables "Maritima". Telex 53153.

DORDRECHT: 51.49 N. 04.40 E. (See Plan Book)

DOCUMENTS: See "Rotterdam".
PILOTAGE: Compulsory. Vessels have to enter New Waterway at Hook of Holland and proceed to Dordrecht via this New Waterway and the River Oude Maas. Masters of vessels bound for Dordrecht should state destination in ETA message as Pilots for Dordrecht embark from pilot cutter at roads. Deep-draughted vessels may have to exchange Pilots just inside breakwaters at Hook of Holland. (See Rotterdam "Ordering a Pilot").
ANCHORAGE: At sea off Hook of Holland (see "Rotterdam"). No anchorage between entrance to New Waterway and Dordrecht.
RADIO/RADAR/VHF: No radar service on River Oude Maas or Dordrecht.
RESTRICTIONS: Max. LOA 175 m. Max. breadth 23 m. Max. draft 29 ft. 6 in. Max. breadth is discussable as 25.90 m. could be allowed. For tankers min. visibility 500 m. (1,640 ft.). For dangerous cargoes, see "Rotterdam". The Pilot will decide the number of tugs required for passage on the Oude Maas, usually a min. of 3–4.
TUGS: Tugboats ordered by Pilot when entering New Waterway. Tugs normally meet vessels at Dordrecht.
CRANES: 2 Transporting bridges 15 tons each, 2 Portal cranes 12.5 tons each, 1 Portal crane 7 tons, 1 Floating crane 7 tons, 3 General cargo cranes 6, 5 and 3 tons capacity.
BRIDGES: Bridges across the River Oude Maas are opened day and night. Sea traffic has preference over shore traffic.
STEVEDORES: Working hours: 0730 hrs on Monday until 1400 hrs on Saturday.
TANKERS: Oil installation of Gebr. Broere N.V. has seven tanker berths. Max. draft 9.0 m. There are other tanker berths for small tankers. No slop (residue) storage facilities.
REPAIRS: Yards of various capacities available for all types of repairs.
FRESH WATER: At oil installations fresh water can be supplied from shore. Or supply by waterboat.
FUEL: Available by barge.
CONSULS:
Denmark tel. 32177 Norway tel. 32177 France tel. 33231.
Other consulates at Rotterdam at 20 km. distance.
POLICE/AMBULANCE/FIRE: Tel. Police 30333; Ambulance and Fire 33333.
AIRPORT: Rotterdam and Amsterdam airports at a distance of 30 and 90 km. respectively served by regular airlines.
PILOT CUTTERS, HEALTH, MEDICAL ATTENDANCE, BUNKERS, CUSTOMS ALLOWANCES, HOLIDAYS: See "Rotterdam".
TIME: GMT plus 1 hour. Summer plus 2 hours.
AUTHORITY: Havendienst der Gemeente Dordrecht.
AGENTS: See "Rotterdam.

EEMSHAVEN: 53.27 N. 06.50 E. (See Plan Book)

LOCATION: On the Western shore of the River Eems, about 15 km. N.W. of Delfzijl.
PILOTAGE: See "Delfzijl".
ANCHORAGE: Near the Western mole of the Eemshaven is an anchorage with a depth of about 16 m.
RESTRICTIONS: The entrance channel Doekegatkanaal has a depth of 12 m. thus enabling ships with draft up to about 12 m. to enter at HW. Plans exist to increase the possible draft to about 13 m.
Tides: The rise at Springs is 3.05 m. and at Neaps 2.35 m. Tidal movement is diurnal with an average range of 2.7 m. (all approx.).
Depths: All depths are indicated in relation to N.A.P. LLWS at Delfzijl lies 2.03 m. below N.A.P. (Normal Amsterdam Level).
BERTHING: The harbour is divided into 4 communicating basins:
Doekegatkanaal: Has a depth of 14 m. at the entrance and 12 m. further on. The bottom width at the moles is 300 m. at 14 m.; the minimum width is 275 m. at 12 m. At the end of the Doekegatkanaal is a turning basin with a diameter of 500 m. and a depth of 12 m.
Wilhelminahaven: East of the turning basin is a special basin for tankers with a depth of up to 17 m. and a bottom width of 200 m. This basin has a length of 600 m. Mooring facilities will be constructed by future industries.
Julianahaven: Located West of the turning basin. This basin has a length of 1,200 m. and a width of 250 to 300 m. ultimately. The depth of this basin varies between 14 and 17 m.

To the South of this basin a quay has been constructed with a length of 600 m. and a width of 300 m. The quay is equipped for general and unitised cargo handling to be handled with 2 cranes with a maximum lifting capacity of 20 tons and 1 crane with a lifting capacity of 30 tons. A Ro-Ro ramp is incorporated in the construction of this quay.
Emmahaven: Has been constructed South of the quay and West of the swinging basin. This basin with a length of 600 m. and a width of 130 m. has been dredged to 10 m.
SUPPLIES: Fuel oil and provisions should be arranged in advance.
REGULATIONS: See "Delfzijl".
AUTHORITY: Port of Delfzijl Authority.
AGENT: See "Rotterdam".

FLUSHING: 51.27 N. 03.35 E. (See Plan Book)

DOCUMENTS:
2 Crew Lists.
2 Passenger Lists.
1 Store List.
1 Personal Effect List.
Ship's Register.
1 Manifest or Bill of Lading.
PILOTAGE: Position of pilot cutters in the Scheldt Estuary: Pilotage is compulsory.

Wielingen (Southern approach) or via Scheur: Vessels approaching the Scheldt estuary from the English Channel pass the lightvessels Sandettie Banks and West Hinder. The Belgian pilot cutter *Wandelaar* is stationed near Buoy A1 at 51° 22′ N. and 02° 53′ E. This cutter has a black hull with a white number on her bow, a yellow funnel with black top and flies a red flag with the letter "P" in white.

A vessel bound for Flushing to discharge, bunker, load, to embark or disembark passengers or for repairs will be provided with a Dutch Pilot, who will take the vessel into harbour. Other vessels for Flushing (sheltering, awaiting orders, unplanned repairs, etc.) will be provided with a Belgian Pilot to Flushing-Roads, where a Dutch Pilot comes on board to take the ship into harbour.

Oostgat (Northern approach): Vessels approaching the Scheldt estuary from the North can take a Pilot in the vicinity of the S.B.Z. lightbuoy (51° 42.3 N. and 03° 14.3′ E.) where a Dutch pilot cutter is stationed, flying a blue flag with the letter "L" in white. As a rule vessels bound for Flushing are provided with a Dutch Pilot.

ETA Messages: Masters' telegrams via Scheveningen Radio, call sign P.C.H., are passed on to Agents 24 hrs. a day, week-ends inclusive.

For this reason it is advisable that Masters communicate with Agents via Scheveningen Radio, via which station Agents also route their messages to vessels.

Vessels bound for the River Scheldt should cable, at least 4 hours in advance, their:

1. ETA "Wandelaar" (Southern Approach) to: "Pilotage Ostend", via Ostend Radio (OST):
2. ETA "Steenbank" (Northern Approach) to: "Pilotage Flushing", via Scheveningen Radio (PCH).

The ETA message should contain the following details: *(a)* the words "ETA Pilot Wandelaar or Steenbank". *(b)* ETA central European time shown in a group of four figures. *(c)* draft (S.W. or FW) with indication of unit applied. *(d)* port of destination and berth.

Pilot cutters may be contacted on VHF Channel 6.

During bad weather both pilot cutters shift to Flushing Roads.

APPROACHES:
Approaches to the Scheldt Estuary are:

	Depth MLWS	*Max. Draft SW Neap*	*Spring*	*Keel Clear-ance*
S. Channel:				
Wielingen	25 ft.	32 ft.	34 ft. 5 in.	5 ft.
Scheur	35 ft. 6 in.	43 ft. 5 in.	46 ft.	5 ft.
N. Channel:				
Oostgat	25 ft. 6 in.	30 ft.	32 ft.	5 ft.

ANCHORAGE: The roads of Flushing offer a safe and spacious anchorage with a sandy bottom. Vessels anchoring in the roads are recommended to do so Southward of the Koopmanshaven (the Western harbour of Flushing) at not less than 0.75 of a mile from the Northern Coast. In this part of the roads depths vary from 10 m. (33 ft.) to 26 m. (85 ft.).

The greatest depths and the strongest tides are encountered on the Southern part of the roads. When lying there vessels are less exposed to the risk of collision in foggy weather etc. and are well away from vessels proceeding up and down the river, manoeuvring for the purpose of landing and/or embarking Pilots, and from ferry boats crossing between Flushing and Breskens.

At the Northern part of the roads the tidal stream slackens gradually until HW is reached and under normal conditions of tide and wind the ebb stream is already felt along the shore from half an hour after HW until 1 hour after LW. From 1 hour after LW the flood tide sets in again and is felt until shortly after HW.

At the South side of the roads the tidal stream is running until slightly over an hour after HW when the stream slackens and turns. Two hours after HW the stream is running in NW direction gradually veering West.

MAX. SIZE: *Flushing East Harbour:* Entrance 34 ft. 4 in. at MLWS. A depth of 38 ft. planned alongside the quay.

Max. draft at Buoys at entrance 43 ft.

Outer Harbour: West side, max. draft 33 ft. (To be deepened to 40 ft. LWOST in 1978).

Inner Docks: Max. depth 24 ft.

Total: Max. length 280 m., max. draft 49 ft. (S.W.), max. d.w.t., 100,000 tons. However, draft is controlled by the depth in the approach channels.

HEALTH: No certificates required. In event of any disease or fever contact Agents.

RADIO: All messages to Agents via Scheveningen Radio.

Flushing Radio can be reached by VHF Channel 14. Harbour tugboats and pilot cutters operate on VHF Channel 6.

RADAR/VHF: Port radar service, none. River service under consideration. Flushing Radio Channel 14. Every 5 min. each hour this station transmits information regarding visibility, water-level, hindrances, anchorages, etc. Harbour tugs Channel 6.

TUGS: Join vessels in Flushing roads. Vessel's lines usually used. No extra for tug lines. For contract holders 5% reduction.

BERTHING: *Outer Harbour:* West side, quay of 1,150 ft. long, depth of water 33 ft. LWOST. Quay height above sea level 2 m. at high tide and 7 m. at low tide. In Northern part of Outer Harbour a landing stage with length of 360 ft. Depth at low tide 20 ft. Depth at HW 29 ft.

Flushing East Harbour: Quay length 1,740 ft. Depth 38 ft. LWOST.

Inner Docks: A double lock and sluice give access from Outer Harbour to inner docks and canal through Walcheren. Largest lock length 455 ft., width 72 ft., depth on still LWOST of 17.5 ft. The other lock is 213 ft. long, 26 ft. wide, and 10 ft. deep. Sluice 113 ft. wide, 28 ft. deep. Constant depth of water at quay 24 ft.

STEVEDORES: Provided by N.V. Haven Van Vlissingen (Port of Flushing Limited). Tel.: 01184–15070. Telex: 55137.

MECHANISED CARGO HANDLING: Quay length 1,700 ft. equipped with 2 portainers suitable for handling 20 up to 40 ft. containers.

Roll-on/Roll-off service between Flushing and Sheerness. Service twice a day. Vessels berth in the Outer Harbour at the Olau Line Terminal. At Flushing-East, Ro-Ro facilities for deep sea vessels.

TANKERS: Vessels carrying over 4,400 gallons of combustible liquids with a flash point up to 21° C., or over 22,000 gallons with flash point up to 55° C. require Harbour Master's permission for entry.

Two discharging berths alongside the quay. Discharge lines three of 8 in. diameter with capacity of about 2,000 t.p.h.

Total: See "Max. Size".

One jetty for tankers up to 100,000 d.w.t. and three jetties for barges and coasters with depth of 20 ft. and 30 ft.

Connections:

Commodity	Loading arms
Fuel oil	2×12 in.
Clean products	2×10 in.
Bunkers (fuel oil only)	1× 8 in.

The two fuel oil loading arms can also be used for the discharge of crude oil. The loading arms are hydraulically operated.

Deballasting: One 12 in. and one 10 in. loading arm can also be used for the discharge of dirty ballast water in unlimited quantities at the rate of about 1,000 t.p.h.

Capacities: Discharging rate of crude oil 3,000 t.p.h. and the loading rate of fuel oil about 2,700 t.p.h.

Supplies: Water obtainable from jetty. Bunkers by barge. Stores by small vehicles max. axle load 12 tons.

MEDICAL: Two hospitals available.

DENSITY: About 1024.

FRESH WATER: Can be supplied either alongside the quay or by water boat. Possible to supply fresh water in Flushing roads weather permitting.

FUEL: All grades obtainable from major oil companies and supplied by barge only.

Economical bunkering arrangements can be made at the sheltered anchorage Schaar van Everingen, a few miles up river from Flushing. No harbour dues. Max. draft HW Neaps 42 ft. Springs 45 ft.(S.W.).

DEVELOPMENTS: In Flushing E. the quay of 1,300 ft. length to be extended by 140 m. with depth alongside 38 ft. LWOST.

GANGWAY/DECK WATCHMEN: Available but not compulsory or necessary.

OPENING/CLOSING HATCHES: On liners by crew or stevedores, ship's option.

CERTIFICATES: On arrival, ship's register only.

CUSTOMS ALLOWANCES: 200 cigarettes for each member of crew and total on board out of bond 5 litres spirits and 100 litres wine.

CARGO GEAR: The port is equipped with modern mobile cranes, which can be used both in the outer harbour and in the inner docks, with the following capacities:

2 cranes 25 tons	2 cranes – 10 tons
3 cranes – 12 tons	1 crane – 8 tons

Floating cranes are available with capacities of 225, 75, 40 and 8 tons.

IDENTIFICATION CARDS: Not required.

CONSULS:

Belgium	tel. 66989	Germany	tel. 01188–1764
Denmark	tel. 14272	Norway	tel. 12272
France	tel. 12373	Sweden	tel. 16828

REPAIRS: All repairs possible.

DRY DOCKS: Largest (Graving) 712 ft. 5 in., width 98 ft. 4 in. Draft 28 ft. 6 ins., 45,000 d.w.t. and 4 smaller docks.

REPATRIATION: All facilities available for crew changes; good railway connections.

AIRPORT: Rotterdam (Zestienhoven) 125 km.; Brussels (Melsbroek) 150 km.; Amsterdam (Schiphol) 180 km.

TIME: GMT plus one hour.

HOLIDAYS: New Year's Day (January 1st); Easter Monday; Queen's Birthday (April 30th); Ascension Day (May 15th); Whit Monday; Christmas Day (December 25th); Boxing Day (December 26th).

Work can be arranged on above days, however dependent upon permission of the Docker's Inspection.

POLICE/AMBULANCE/FIRE: Police 3333; Ambulance and Fire 2323.

TELEPHONES: Not possible to place telephones on board except for vessels berthing at the shipyard "De Schelde".

SERVICES: Compass Adjuster; Radio/radar services also calibration of the Direction Finder, Seamen's Home (Mission to Seamen); Lloyd's Sub-agents; Ship's Laundries.

SHORE LEAVE: After clearing inwards, crew members are allowed to go ashore without special permission.

AUTHORITY: *Outer Harbour:* N.V. Haven van Vlissingen.

E. Harbour: The Port Authority of Flushing.

AGENT: Wm. H. Muller & Co. Scheepvaartagenturen B.V., 16 Boulevard de Ruyter, P.O. Box 81, 4380 AB Flushing. Tel.(01184) 12171. Telex 55068. Cables "Mineral".

GRONINGEN: 53.15 N. 06.34 E. (See Plan Book)

The port is connected with the Ems Estuary via the Eemskanaal and the lock at Delfzijl.

DOCUMENTS: Clearing is done at Delfzijl.

PILOTAGE: For the approach of the lock see "Delfzijl".

The length of the lock is 120 m. and the width 16 m. Depth over sill at low water 3.9 m. and at canal level 6.07 m.

On the locks canal-pilots are available but pilotage on the canal is not compulsory. The length of the canal is 14 miles and it has a least depth of 5.2 m. There are 3 bridges all 16 m. wide.

MAX. SIZE: Maximum size for ships passing lock and navigating canal; beam 13 m. and draft 4.5 m. (Vessels with greater beam and draft possible with permission of the Canal Authority.)

TUGS: Available at Delfzijl and Groningen.

BERTHING: *Hunzehaven:* South side 300 m. quayage, railway connected, max. draft 4.5 m., two grab cranes 3.5 ton, two general cargo cranes 3 ton.

Oosterhaven: North side 150 m. quayage, max. beam 12 m., max. draft 3.6 m., two grab cranes 3 ton.

Deense haven: Three mooring buoys, max. draft 4.5 m.

Eemskanaal: Private silo max. beam 12 m., max. draft 3.9 m. private timber yard max. beam 12 m., max. draft 3.6 m.

Van Starkenborghkanaal: Private silo max. beam 9.6 m., max. draft 2.9 m. private timber yard max. beam 9.6 m., max. draft 2.9 m.

CRANES: Floating sheerlegs up to 250 tons.

STEVEDORES: Available.

MECHANICAL CARGO HANDLING: Silo's with equipment for bulk-handling of grain on Eemskanaal and Van Starkenborghkanaal.

MEDICAL: 3 hospitals available.

FRESH WATER: Supplied by Authority's water boats.

FUEL: By barge only.

CERTIFICATES: On arrival, ship's register only.

CONSULS: Belgium, tel. 138222; Norway, tel. 189444; Spain, tel. 137879.

REPAIRS: All repairs possible at Delfzijl.

DRY DOCKS: Transverse slipway at Delfzijl.

AIRPORT: Eelde, 10 km. from Groningen, daily services to Schiphol.

TIME: MET.

HOLIDAYS: New Year's Day, Easter Monday, Queen's Birthday (30th April), Ascension Day, Whit Monday, Christmas Day, Boxing Day.

POLICE/AMBULANCE/FIRE: Police tel. 121212; Ambulance tel. 123456; Fire Brigade tel. 123456.

TELEPHONES: Can be placed on board alongside Hunzehaven quay.

AUTHORITY: Harbour Master, Gemeentelijk Havenbedrijf.

IJMUIDEN (YMUIDEN): 52.28 N. 04.34 E. (See Plan Book)

Also refer to "Amsterdam"

DOCUMENTS:

2 Personal Effects Lists.
2 Stores Lists.
3 Crew Lists.
3 Passenger Lists.
Declaration of Health.

PILOTAGE: On entering and leaving Ijmuiden Government pilotage is compulsory. A pilot vessel with Pilots cruises at sea in the vicinity of Ijmuiden between the light whistle buoy and the moles.

In order to avoid delay, Captains, who require a Pilot must advise their ETA not less than 4 hours in advance to "Pilotage Ijmuiden". This advice must be amended, if vessel's ETA changes more than 2 hours from the original advice.

The text of the message must contain:

a. The word "ETA-Pilot".
b. Expected time arrival (group of 4 figures) in middle European time.
c. Draft with indication of unit applied.
d. Port of destination.

"Pilotage Ijmuiden" can be informed via Scheveningen Radio or via VHF Channel 12. Pilotage and navigation are possible at night.

Pilot Ladders: Pilots strictly adhere to Regulation 17b, Chapter V of the International Convention for the Safety of Life at Sea, which reads as follows:

"Whenever the distance from sea level to the point of access to the ship is more than 30 ft. (9 m.), access from the pilot ladder to the ship shall be by means of an accommodation ladder or by another equally safe and convenient means".

Pilot from Helicopter: When the pilot service per pilot cutter has been suspended owing to weather conditions it is possible to take a Pilot on board vessels by helicopter. Helicopter pilotage is carried out for vessels which have an obstacle free hoisting area on deck of minimum 15 ft. in diameter. Deck plans should be provided in advance.

Helicopter rates:

Dfl. 4,080. – per flying hour.
Dfl. 225. – per sling transfer.
Dfl. 318. – overtime from 1800 until 0600 hrs. and on Sundays and holidays.

Restrictions

1. Minimum visibility 800 m. at 150 ft. above sea level.
2. Maximum wind Force 10 (55 kts.).
3. Severe turbulence and icing conditions at or below 150 ft.

Harbour Master's office can be contacted by VHF Channel 11 to obtain information for safe navigation and rapid locking. In adverse weather vessels may receive radar assistance from Port Operations for entering harbour.

ANCHORAGE: Vessels may anchor off Ijmuiden outside the breakwaters.

MAX. SIZE: For North Sea Canal, entrance lock 1312 ft. long, 164 ft. wide. 49 ft. 02 in. depth. Density: 1016.

The official maximum draft to enter Ymuiden is 43 ft. salt water. Vessels with a draft of 43 ft. to 45 ft. salt water may enter Ymuiden and proceed to Amsterdam after special permission thereto has been given by the Government Harbour Master at Ymuiden. Such permission to be applied for well in advance.

HEALTH: Pratique granted automatically on arrival after completion of Maritime Declaration of Health. In case of suspected disease on board notify Agent by radio before arrival advising full details.

TUGS: Available. Meet vessel in harbour entrance if required.

BERTHING: Coal and ore cargoes discharged to Blast Furnace and Steel Works Company in Outer Harbour.

Quay 1: Length of quay: 1,360 ft. Depth alongside quay: East part 31 ft. at LLWS, West part 37 ft. at LLWS.

Opposite the quay there are 3 dolphins available where one vessel can wait for a loading/discharging berth (up to 34 ft. draft).

Equipment:

2 cranes, lifting capacity 30 tons, max. outreach 57 ft.
1 crane, lifting capacity 30 tons, max. outreach 63 ft.

Finished products such as rolling mill products, pig-iron, cast iron, steel ingots, slabs and coils are handled.

Quay 2: Length of quay: 1,800 ft. Depth alongside quay: 48 ft. 09 in. at LLWS. Max. draft; the entrance to Outer harbour is accessible to vessels up to 43 ft. draft and with special permission of the harbour authorities up to 45 ft. draft.

Equipment:

3 bridgecranes, lifting capacity 40 tons each, max. outreach 115 ft. 2 conveyor belt systems (capacity 6,000 t.p.h.).

Despatch:

About 45,000 tons iron ore per 24 hours. About 30,000 tons coal per 24 hours.

Quay 3: Length of quay: 825 ft. Depth alongside quay: 37 ft. LLWS. On this quay exclusively steel products will be loaded.

Equipment:

2 cranes with a capacity of 60 tons each. Outreach 70 ft.

Inner harbours: These harbours are mainly used for loading or discharging smaller vessels having drafts between 13 ft. and 21 ft. 6 in.

Finished products such as rolling mill products, pig-iron, cast iron, steel ingots, slabs, coils but also fertilisers are handled.

DEVELOPMENTS: Proposed new outer port to be built South of South Harbour Entrance Mole to accommodate vessels up to 62 ft. draft.

STEVEDORES: *Working Hours:* In the Outer harbours round the clock, also on Sundays and holidays.

In the Inner harbour round the clock except from 1400 hrs. on Saturdays until 0600 hrs. on Monday.

FRESH WATER: Available from quay.

FUEL: Available by barge.

MEDICAL: Doctors, hospital and all services available.

REPAIRS: Possible.

CUSTOMS ALLOWANCES: 200 cigarettes for each crew member; 5 litres spirits for whole ship.

CONSULS, DRYDOCKS: And all general information; refer to "Amsterdam".

AUTHORITY: Rijkshavendienst Ijmuiden.

AGENT: See "Amsterdam".

ROTTERDAM: 51.55 N. 04.24 E. (See Plan Book)

DOCUMENTS: Maritime Declaration of Health, obtainable from River Pilot. Crew list in duplicate on special Dutch forms, obtainable from Agents. Ship's Register. Store list. Crew custom declaration showing quantity cigars, cigarettes, tobacco, spirits, wine, radios, cameras, etc., and souvenirs for each Crew member.

Crew and passenger lists to show date of last vaccination against smallpox, for vessel coming from suspect zone within last 14 days.

TOVALOP Certificate (tankers with over 2,000 tons of oil products on board).

DEEP SEA PILOTAGE: See "Brixham" or "Cherbourg".

PILOTAGE: River pilotage compulsory from sea to harbour area and vice versa, except vessels in ballast drawing less than 7 ft. 3 in.

Harbour pilotage compulsory from fairway to berth in harbour area and vice versa, except for vessels under 475 g.r.t.

Pilot Cutters: Cruising continuously, day and night, off entrance to New Rotterdam Waterway, one North of line North Mole/Maasbuoy and one near Maasbuoy. Characteristic signals:

1. By day pilot flag, being a blue flag with white letter "L", displayed from main top mast.
2. At night, lights as prescribed by Regulations for Preventing Collisions at Sea.
3. During bad visibility the fog signal prescribed by rule 15 of these Regulations.

Ordering a Pilot:

1. Vessels bound for New Rotterdam Waterway should cable, at least 4 hours in advance, ETA pilot station, gross tonnage and draft to:
   (a) Pilotage Hook of Holland via Coastal Station Scheveningen Radio (PCH) or
   (b) Coastal Station Maassluis Radio (Radio Dirkzwager) by VHF Channel 12 (Port operations) or
   (c) Station Pilot Maas at Hook of Holland by VHF Channel 20.

This ETA notification shall, with due observance of the aforementioned 4 hours period, be rectified if the ETA will be more than 2 hours later than the ETA last reported.

Without prejudice to this provision the Master shall indicate his requirement for a Pilot by displaying the prescribed visual signals when his vessel arrives within visual range of the pilot vessel.

The ETA message shall contain:

(a) The words "ETA Pilot"
(b) ETA (group of 4 figures) in Central European Time
(c) Draft of vessel including unit of measurement (feet or decimetres)
(d) Port of destination.

Please note that vessels which do not comply with the above-mentioned regulations and fail to state their ETA timely or accurately, may only be provided with a Pilot 4 hours after their arrival at the pilot station, provided that other vessels which reported themselves correctly will not be delayed.

2. Vessels bound for Port of Dordrecht should also state their destination, as Pilots for Dordrecht embark from pilot cutter on roads.
3. Vessels bound for Europoort should also adopt following procedure:

(a) Vessels equipped with VHF should notify via Channel 12 or 14 their ETA pilot station at least 1 hour in advance to Maassluis Radio Dirkzwager.
(b) Vessels not equipped with VHF should cable same information to Europoort Rotterdam via Scheveningen Radio (PCH).

On arrival at pilot station vessels requiring Pilot are to display following signals, separately or together:

1. *By day,* International code signal "G". Pilot flag, viz., vessel's National Flag with white border from foremast.
2. *By night,* Morse signal "G" by flash light. Blue lights at intervals of 15 minutes. A bright white light shown just above bulwark for 1 minute at short intervals.
3. *During bad visibility.* At least 3 seconds after the normal fog signal the international code signal "G". Pilot vessel will answer: the normal fog signals, followed after at least 3 seconds by international code signal "H" (I have Pilot on board).

Pilotage for deep draft vessels and helicopter Service:

Vessels drawing 57 ft. (SW) and over must make use of the "Eurochannel" between the "Euro One Buoy" and the "Centre Maas Buoy". Pilots are embarked as follows:
up to 57 ft. SW – at the pilot station near the Centre Maas buoy
57 ft.–68 ft. SW – by helicopter:
(a) in rendezvous position 52° N. 03° E.
(d) at the VLCC anchorage off Hook of Holland.

For vessels drawing over 57 ft. (SW) 1.5 times the pilotage tariff Sea – Hook of Holland is applicable.

Helicopter pilotage is regularly carried out for vessels which have an obstacle-free hoisting area on deck of min. 15 ft. in diameter. Deckplans should be provided in advance.

Restrictions:

1. Min. visibility 800 m. at 150 ft. above sea level.
2. Max. wind force 10 (55 kts.).
3. Severe turbulence and icing conditions at or below 150 ft.

Pilot ladders: Whenever the distance from sea level to the point of access to the ship is more than 30 ft. (9 m), access from the pilot ladder to the ship shall be by means of an accommodation ladder or by other equally safe and convenient means.

ANCHORAGES: Recommended anchorages:

1. South of the Maas Centre Buoy
2. Vessels drawing 57 ft. or more at the approximate position 52° 00′ N. 03° 00′ E.
3. Emergency anchorage for deep-draft vessels NW of Maas Centre Buoy.

RESTRICTIONS: Dangerous Goods:

General Information:

Regulations are based on several Governmental laws and Municipal bye-laws.

The "Dangerous Goods Department" of the Municipal Port Management is the centre where all information on dangerous goods on board vessels is collected, administrated and distributed to those concerned.

Inspection on board vessels berthed in the Port of Rotterdam will be carried out mainly by inspectors of the Municipal Dangerous Goods Department, although in certain cases (e.g. explosives), Governmental Dangerous Goods Inspectors are in charge as well.

For detailed information the following Regulations should be consulted:

Rotterdam Port Bye Laws (Havenverordening Rotterdam)
Order of the State Secretary for Traffic and Public Works No. A5/071054 of 31 Dec. 1971
(Beschikking van de Staatssecretaris van Verkeer en Waterstaat Nr. A5/071054 31 Dec. 1971)
Notice to shipping of the Governmental Harbour Master No. 40/1974 (Bekendmaking aan de scheepvaart No. 40/1974)
Notice to shipping of the Dept. of Public Works No. 50/1967 (Bekendmaking aan de scheepvaart No. 50/1967)

From these Regulations the following significant obligations have been extracted:

1. Signals:

Vessels carrying:

a. any quantity of explosives;
b. more than 10,000 kg. gross per class in packages indicated in the IMDG Code with a danger label as poisonous goods of Class 2, Class 3, Class 6, or Class 8;
c. all gases in bulk as mentioned in IMCO Class 2;

Additional Restrictions

d. chemicals in bulk as mentioned in Chapter VI of the IMCO Code for the construction and equipment of ships carrying dangerous chemicals in bulk should hoist the following signals before entering the Rotterdam Waterway area:
   I. by day: the International signal "B";
   II. by night: 2 red lights at the same level at a distance of 1 m.

2. Prior Notification:

Masters of vessels carrying:

a. dangerous goods as mentioned above;
b. more than 1,000 kg. gross weight per substance of the goods mentioned under 1.b. in packages;
c. more than 5,000 litres of inflammable liquids;
d. the commodities mentioned in app. I, above quantities as stated in the list, shall report these commodities to the Dangerous Goods Dept., of the Municipal Harbour Master 24 hours before arrival.

3. Explosives:

There is a restriction on the carriage of explosives by ships, dependent on kind, quantity and stowage of the explosives.

Permission to deliver explosives is given by the Minister of Transport.

Captains of vessels are advised to make sure whether such a permission has been granted.

4. Dangerous Cargo List:

Apart from these obligations the Rotterdam Port Bye Laws prescribe that a vessel having any dangerous cargo on board is prohibited from being in the harbour unless there is a list on board and an identical list has been submitted to the Harbour Master, stating the correct technical names, IMCO class flashpoint if below 61° C and the stowage of these materials.

5. Operational Notice:

Masters of vessels showing the signals as mentioned above ("B"-flag or 2 red lights) shall give notice to "Post Waterweg" on VHF Channel 14.

This notice shall be given at least half an hour but not more than 1 hour before the ship enters the Rotterdam Waterway area.

This can be done sailing from sea, sailing downstream the Oude Maas or from a berth.

This notice shall contain: ship's name, position, destination and expected time of entering or leaving the Rotterdam Waterway area.

Should there be considerable alteration in this time, "Post Waterway" should be notified again 30 minutes in advance.

After the first notice and during the further voyage on the Rotterdam Waterway, VHF Channel 14 should be kept on stand-by listening watch should be kept on.

When visibility is less than 500 m., ships may be prohibited from navigating the Rotterdam Waterway.

6. Pilotage:

Ships carrying:

a. more than 1,000 kg. explosives (IMCO Class 1), liable to mass explosion;
b. substances of IMCO Class 2, Class 3 (not miscible with water) or Class 6.1 in bulk, must have a Pilot on board when entering the Rotterdam Waterway area. At least 24 hours before arrival and 1 hour before departure the following particulars shall be given to the Governmental Harbour Master via the H.C.C. (Harbour Co-ordination Centre);
   1. Name and call sign;
   2. Nationality;
   3. Gross tonnage and draft;
   4. Nature and quantity of dangerous cargo;
   5. Berth;
   6. ETA/ETD;
   7. Agent.

Incoming ships shall also give notice 4 hours before arriving at the Pilot Cruising Station stating:

1. Name and call-sign;
2. Draft;
3. ETA;
4. The code word "IMCO".

by radio telegram via the Netherlands Coastal Radio Station (PCH) addressed to: "Pilotage Hook of Holland" or by VHF on Channel 12 to "Maassluis Radio" (Dirkzwager).

Navigation on the Rotterdam Waterway might be prohibited if circumstances make this necessary.

WRONG ORDER

Alterations:

In the course of 1979 the regulations on the transport of dangerous goods as well as the communication system for the Rotterdam Waterway area may be changed. These changes will be duly announced.

Dangerous are: a. Explosives; b. Radio-active materials;
c. The undermentioned goods.

A

Remarks:

a. Particular berths are the Eemhaven basins and the harbour basins to the West of them on the South bank of the New Rotterdam Waterway.
b. Liquid dangerous cargoes in bulk only in the oil harbours.

Fog: Tankers will not be allowed to manoeuvre in fog, i.e. in visibility of less than 500 m. (1,640 ft.).

Entry times: Depend on prevailing circumstances, as follows:

Europoort: Tankers:
up to 61 ft. (SW) draft – Any time.
over 61 ft. (SW) draft – 1 hour before until 2 hours after high water at Hook of Holland.

(continued on page 676).

Name of dangerous goods or group of dangerous goods	*Quantity above which they are considered being dangerous**	*Quantity that may be loaded or discharged at each berth by one ship***
1. chlorine	200 kg.	1,000 kg.
2. phosgene	200 kg.	1,000 kg.
3. fluorine	200 kg.	1,000 kg.
4. hydrogen cyanide	500 kg.	5,000 kg.
5. hydrogen sulphide	500 kg.	5,000 kg.
6. carbon disulphide	500 lit.	5,000 lit.
7. hydrogen bromide	1,000 kg.	10,000 kg.
8. hydrogen chloride	1,000 kg.	10,000 kg.
9. hydrogen fluoride	1,000 kg.	10,000 kg.
10. sulphur dioxide	1,000 kg.	10,000 kg.
11. methyl bromide	1,000 kg.	10,000 kg.
12. acetone cyanohydrin	1,000 lit.	40,000 lit.
13. acrylonitrile	1,000 lit.	40,000 lit.
14. acrolein	1,000 lit.	40,000 lit.
15. allyl alcohol	1,000 lit.	40,000 lit.
16. allyl chloride	1,000 lit.	40,000 lit.
17. epichlorohydrin	1,000 lit.	40,000 lit.
18. acetonitrile	1,000 lit.	40,000 lit.
19. dimethyl sulphate	1,000 lit.	unlimited
20 chloropicrin	1,000 lit.	,,
21 bromine	1,000 lit.	,,
22. lead alkyls	2,000 lit.	,,
23. cyanides	2,000 lit.	,,
24. nitrate of ammonium	100,000 kg.	,,
25. highly poisonous pesticides in solution	2,000 lit.	,,
26. chlorosulphonic acid	1,000 lit.	,,
27. ethylene dichloride (dichloro ethane)	1,000 lit.	,,
28. sulphuric acid with more than 85% acid (H_2SO_4)	400,000 lit.	,,

WRONG ORDER

* Obligation to report to the Harbour Master at least 24 hours before arrival.
** For bigger amounts apply to the Harbour Master.

INSERT (A)

ADDITIONAL RESTRICTIONS (CONT'D)

Vulcaanhaven Vlaardingen: Between 33 and 39 ft. at slack high tide only.

Botlek:

(*a*) Between 33 ft. and 37 ft. any time except between 4 hours and 1 hour before high water at Rotterdam.

(*b*) 37 ft. and 39 ft. at slack low or at slack high water, depending on circumstances.

(*c*) 39 ft. to 44 ft. only at slack high water.

Vessels with a length over 200 m. (656 ft.) can only enter at slack tide.

Waalhaven:

Same as Botlek, but vessels with a draft of 39 ft. fresh water, which are over 800 ft. in length, must first discharge part cargo in Botlek from where, after draft has been reduced to 37 ft. fresh water, they can be shifted to Waalhaven.

Other basins: Any time.

MAX. SIZE:

Entrance and river area	*Channel width in m.*	*Max. SW draft (High tide)*	*Keel-clearance*
Euro 1 buoy – Euro 5A	600	68 ft.	20%
Euro 1 buoy – Euro 5A	1,200	65 ft.	20%
Euro 5A buoy – Maas centre	600	68 ft.	17.5%
Euro 5A buoy – Maas centre	1,200	65 ft.	17.5%
Maas centre buoy – Entrance	600–400	68 ft.	15%
Entrance – Europoort	400–350	68 ft.	10%
Entrance – Botlek	250	44 ft.	10%
Botlek – Waalhaven	250	40 ft.	10%
Waalhaven – Rijnhaven	200	34 ft.	10%

(A)

Vessels drawing over 57 ft. have to report at least 6 hours before arrival at the rendezvous point to "Traffic Centre Hook" (TCH) at Hook of Holland via coastal radio station "Scheveningen Radio" (PCH). The message should contain the following particulars:

a. name and call sign
b. gross tonnage and max. draft in SW.
c. ETA rendezvous point
d. statement of nautical instrument (gyro, radar, VHF, Decca, Mark XII or XXI.)

Also see "General".

Shifting: Vessels which have been partly discharged at Europoort/Maasvlakte terminals should arrive at the Botlek entrance half an hour before high tide at Rotterdam. The following rules in view of length and draft apply:

Max. length overall	*Max. draft allowed*
up to 260 m.	44 ft. SW
260–270 m.	42 ft. SW
270–280 m.	41 ft. SW
280–300 m.	39 ft. SW

HEALTH: Master has to fill in and sign Maritime Declaration of Health which is handed to him by Pilot. Vessels subject to medical inspection have to hoist flag signal according to Pilot's orders.

RADIO: Recommended radio station: Scheveningen Radio, call sign PCH, via which station also Agents send messages to vessels.

RADAR/VHF: Chain of 7 shore-based radar stations permits navigation during all weather conditions. Radio and radar station Pilot Maas, at Hook of Holland, communicates via VHF Channel 20.

VHF range = about 15 miles.

Radar range = about 14 miles in S.W. and West direction, and 10 miles in North direction.

Masters are requested to call this station, especially during bad visibility, well in advance of arrival at pilot station. Pilot Maas provides vessels within range with nautical information and acts as a link with pilot cutters.

Radio and radar station, known as "Rijkshavendienst Waterway", located in Europoort now operates a 24-hour service. It acts as communication post for safety for shipping outside entrance to New Waterway and on Waterway. The station can be contacted by inward bound vessels, but must be contacted by vessels before departure from Europoort by VHF Channel 14, call-sign "RHD Waterway". Station also gives nautical information on situation on New Waterway every half hour via VHF Channel 14 in English.

Radar assistance provided on Channel 3 from CARW Separation Buoy into Europoort and vice-versa.

TUGS: Tugs normally join vessel on river when nearing the basin where vessel will be accommodated. Vessel's towing lines used. On departure from Europoort the tow ropes, fastened to the stern, must be supplied by the tugs.

BRIDGES: New Waterway connects port of Rotterdam with North Sea, without any locks or bridges. Only to reach some shipyards, situated East of Rotterdam, vessels have to pass the "Maas-Bridges" (Koningshaven), which are on working days opened at regular times.

GENERAL CARGO FACILITIES:

	Max. FW draft at LW	*Length of quay*	*No. of cranes*	*Capacity in tons*
Schiehaven	9.0 m. (29 ft. 6 in.)	640 m. (2,100 ft.)	8	5—17.5
Lekhaven	10.0 m. (32 ft. 10 in)	855 m. (2,790 ft.)	8	5—25
Merwehaven	10.0 m. (32 ft. 10 in.)	603 m. (1,978 ft.)	8	5—25
Maashaven	9.0 m. (29 ft. 6 in.)	750 m. (2,460 ft.)	11	5—25
Waalhaven, Pier 1	10.5 m. (34 ft. 6 in.)	860 m. (2,817 ft.)	13	5—25
Princess Beatrixhaven Gen. cargo section Open storage area Banana installation	10.0 m. (33 ft.)	733 m. (2,405 ft.)	9 4 banana elevators 80,000–100,000 cartons of 20 kg. per 7.75 hours.	5—17.5
Waalhaven, Pier 6	11.0 m. (36 ft. 00 in.)	771 m. (2,526 ft.)	7	12.5—30
Parkhaven } Offshore Pier	8.0 m. (26 ft. 03 in.)	443 m. (1,453 ft.)		
Jobskade } Offshore Pier	8.5 m. (28 ft.)	168 m. (551 ft.)		
Jobshaven } Offshore Pier	8.0 m. (26 ft. 03 in.)	354 m. (1,161 ft.)		

The 17.5/25 ton cranes are mainly used for the handling of containers and steel. In combination these cranes can lift 28 tons. The 30-ton cranes are mainly used for the handling of logs and pipes. In combination these cranes can lift 48 tons.

BULK HANDLING FACILITIES: Also see Tables on pages 677 and 678.

Europees Massagoed – Overslagbedrijf (EMO), B.V.: (European Bulk Transhipment Company (EMO) B.V.) Also see "Tables".

World's largest bulk transhipment and storage installation is situated on the Maasvlakte, which has been reclaimed from the North Sea. Fully loaded ore carriers up to 270,000 d.w.t. can be handled.

EMO B.V. is an executing company which concludes transhipment contracts, primarily for ores and secondly for coal. Participants in this company are: Frans Swarttouw; S.H.V. Nederland; August Thyssen-Hutte A.G.; Manufrance; Ruhrkohle. A.G. Messrs. EMO operate 2 transhipment installations:

1. Maasvlakte terminal – E.K.O.M. (Erts Kolen Overslag Maasvlakte).
   Participants: Frans Swarttouw
   Manufrance
   S.N.V. (Transport – en Handelmaatschappij Steenkolen Utrecht B.V.)

A conveyor belt system connects the discharging pier in the Mississippi haven with the barge loading section in the Hartelhaven and with the loading installation for railway wagons, both direct and via the stockpiling area.

Technical data:

Discharging pier – quay length 650 m. (2,231 ft.); max. draft (HW) – 65 ft. SW.

Loading section for barges – quay length 700 m. (2,296 ft.); max. draft – 17 ft. FW.

Max. discharging rate – 6,000 tons of ore per hour.

Average discharging rate – 3,000 tons of ore per hour.

Loading rate railway wagons – 3,000 tons of ore per hour.

Outreach discharging gear – 45 m. (148 ft.).

(continued on page 678)

BULK HANDLING FACILITIES: *(continued)*

Installation		Quay-length (m.)	Max. depth at MLW		Equipment	Discharging rate (t.p.h.)		Max. outreach discharging gear	Max. height of gear above MHW	Loading rate (t.p.h.)	Max. outreach loading gear	Capacities	
1. EMO B.V.	disch. section	650	62 ft.	SW	2 unloaders (future: 3)	Max.	6,000	45.00 m. (148 ft.)	30.00 m. (100 ft.)			Storage	6 million tons
Maasvlakte Terminal – EKOM					conveyor-belts 2 stacker/reclaimers	Average	3,000					Transfer	18 million tons
	loading	500	20 ft.	FW	2 loading machines 1 wagon loading inst.					Max. 14,000	20.00 m. (65 ft. 8 in.)		
Botlek terminal	disch. section	250	42 ft. 8 in.	SW*	2 unloaders	Max.	2,000	19.50 m. (64 ft.)	19.00 m. (62 ft.)			Storage	1.3 million tons
Botlek B.V.		250	38 ft.	SW	conveyor-belt 1 stacker	Average	1,600					Transfer	9 million tons
	loading	200	29 ft.	SW	1 reclaimer 2 loading machines 1 wagon loading inst.					Max. 4,400 Average for vessel up to 15,000 d.w.t.	20.00 m. (65 ft. 8 in.)		
2. Europoort C.V.	disch. section	645	59 ft.	SW	3 unloading towers	Max.	6,900	34.75 m. (114 ft.)	24.00 m. (78 ft. 8 in.)			Storage	3.5 million tons
					conveyor-belts 4 stacker/reclaimers	Average	4,500					Transfer	15 million tons
	loading	550	20 ft.	SW	2 loading machines					Max. 6,000	18.10 m. (59 ft. 4 in.)		
3. Europoort Silo B.V.		230	52 ft. 6 in.	SW	2 unloading towers conveyor-belts, silos loading installation	Max.	2,400	26.00 m. (85 ft.)	20.00 m. (65 ft. 8 in.)	Max. 1,600 for vessels up to 60,000 d.w.t.	24.00 m. (78 ft. 8 in.)	Silo Transfer	100,000 tons 2-3 million tons
4. G.E.M. Europoort	disch. section	580	61 ft.	SW	4 shore elevators	Max.	3,400	28.00 m. (91 ft. 7 in.)	23.80 m. (77 ft. 10 in.)				
		370	44 ft. 8 in.	SW	4 floating elevators	Max.	2,800	26.50 m. (86 ft. 8 in.)		Max. 2,400 up to 30,000 d.w.t.		Silo	65,000 tons
	loading	2×170	26 ft.	SW	8 loading pipes	Max.	4,800						
5. G.E.M. Botlek	disch. section	2×245	42 ft. 6 in.	SW*	5 shore elevators	Max.	2,100	20.00 m. (65 ft. 8 in.)	18.00 m. (59 ft.)			Silo	60,000 tons
					conveyor-belts and silos 5 floating elevators	Max.	2,000						
	loading	2×142	32 ft.	SW	6 loading pipes					Max. 1,600 up to 25,000 d.w.t.	13.50 m. (44 ft. 4 in.)		
Chemiehaven (derivatives)		220 (vessels' length)	32 ft.	SW	2 chain transporter machines	Max.	1,000	13.70 m. (45 ft.)	13.30 m. (43 ft.)				
6. Frans Swarttouw	disch. section	548	42 ft. 8 in.	SW*	2 transporter bridges	Max.	1,400	44.50 m. (146 ft.)	25.20 m. (82 ft. 10 in.)	If direct overboard dependent on size oncarrying barges	If direct overboard see discharging gear		1.5–2 million tons open storage 23 steel silos 3 sheds
St. Laurenshaven		345	39 ft. 4 in.	SW	1 transporter bridge	Max.	650	40.80 m. (134 ft.)	16.50 m. (54 ft. 3 in.)				
Botlek					2 transporter bridges	Max.	450	38.00 m. (124 ft. 8 in.)	15.20 m. (49 ft. 10 in.)				
					2 cranes	Max.	400/ 650	32.00 m. (105 ft.)	35.80 m. (117 ft. 6 in.)				
	loading	180	23 ft.	SW	2 loading machines					Max. 1,000	16.50 m. (54 ft. 2 in.)		
Frans Swarttouw		626 quay	34 ft.	FW*	3 transporter bridges	Max.	1,950	42.00 m. (138 ft.)	16.00 m. (52 ft. 6 in.)				0.9 million tons open storage and silos
Vulcaanhaven		buoys	39 ft.	FW	4 electric cranes	Max.	500	36.00 m. (118 ft.)	18.00 m. (59 ft.)	Phosphates	Phosphates		
Vlaardingen					1 bulk loading machine					Max. 600	20.00 m. (65 ft. 8 in.)		
7. S.H.V. Waalhaven pier 5		345	36 ft.	FW	4 transporter bridges	Max.	1,400/ 1,600	39.00 m. (128 ft.)	14.00 m. (46 ft.)	Ex stock-pile 500. Ex barges 150/400	When loading ex barges max. beam of vessel amounts to 106 ft.		80,000 tons coal

*Max draft allowed at HW in Botlek 44 ft. SW, under certain conditions 45 ft. SW and in Vulcaanhaven 39 ft. FW Bulk cargoes are also handled at the buoys in all basins by means of floating cranes of Messrs. Aegir and S.H.V.

Grain Handling Facilities:

	Max. draft	*Quay length*	*Number of elevators*	*Total disch. capacity*	*Silo capacity (tons)*
1. Grain Elevator Company (G.E.M.)					
a. Beneluxhaven, Europoort					
1. Discharging pier, outside	61 ft. SW	580 m.	4	3,400 t.p.h.	65,000
Discharging pier, inside	44 ft. 8 in. SW	370 m.			
2. Coaster pier for the simultaneous loading of 4 coasters or 2 vessels up to 8,000 d.w.t.	26 ft. SW	2×170 m.		8 loading pipes	
3. Dintelhaven, 3 barge piers each for the loading of 2 barges simultaneously				4,800 t.p.h.	
b. Botlek discharging section:	42 ft. 6 in. SW	2×245 m.	5	2,100 t.p.h.	60,000
loading section:	32 ft. SW	2×142 m.			
c. Chemiehaven	32 ft. SW	225 m.	2	1,000 t.p.h.	
d. Maashaven – Silo	26 ft. FW	150 m.	5	700 t.p.h.	90,000
2. Europoort Silo B.V.					
Beneluxhaven, Europoort	52 ft. 6 in. SW	230 m.	2	2,400 t.p.h.	100,000
				Capacity per elevator	
3. Floating Equipment					
a. Grain Elevator Company			17	300-400 t.p.h.	
			3	800 t.p.h.	
b. Grainwave B.V.			2	400 t.p.h.	
			1	600 t.p.h.	

Total annual discharging capacity of the Grain Elevator Comp. (G.E.M.): 25 million tons.

Max. height of gear above MHW – 30 m. (98 ft.).
Storage capacity – 8 million tons.
Transhipment capacity – 18 million tons per year.
2. Botlek Terminal – Botlek B.V. "See Table".

Ertsoverslagbedrijf Europoort C.V.:
This transhipment installation, specialised in the handling of iron ore, is situated between Caland canal (left), and Dintelhaven (right).

Participants in this installation, partly via their Dutch sister companies, are: August Thyssen-Hutte A.G.; Fried. Krupp-Huttenwerke A.G.; and Mannesmann A.G.

A conveyor belt system connects the discharging pier in the Caland canal with the barge loading section in the Dintelhaven, both direct and via the stockpiling area. For further details of this installation see "Table."

Technical data:
Quay length discharging section 645 m. (2,116 ft.).
Max. draft allowed at MLW – 59 ft. SW.
Max. capacity – 6,900 t.p.h.
Average discharging rate – 4,500 t.p.h.
Outreach discharging gear – 34.75 m. (114 ft.)
Max. height of gear above MHW – 24 m. (78 ft. 8 in.)
Storage capacity – 3.5 million tons
Transhipment capacity – 15 million tons/year.

Berthing possibilities for bulk carriers and OBO's:
Beneluxhaven: Europoort Silo B.V. 1; G.E.M.-Europoort 3-4.
Botlek: G.E.M. installation 2; G.E.M. buoys 1; Buoy No. 21 1.

At the G.E.M.-Europoort terminal it will be possible to discharge vessels of up to 200,000 d.w.t. Conveyor belts (1 per elevator) will transport the grain at a capacity of 800 cu. m. per hour to a central building with automatic weighing machines.

Grain Loading:
Grain loading into vessels of up to 25,000 d.w.t. can be effected both by means of floating elevators, ex-barges, and at the G.E.M.-Botlek shore installation.

SPECIALISED CARGO-HANDLING FACILITIES:
Container Terminals:
Prinses Beatrixhaven: Max. draft 36 ft. (SW).
Prinses Margriethaven: Max. draft 42 ft. (FW).
Prins Willem Alexanderhaven: Max. draft 40 ft. (SW), 41 ft. 04 in. (SW) permitted alongside whilst handling cargo. 2 and 3 are operated by E.C.T., capacity 500,000 containers. Length of quay, 3,000 m. Operates 14 container cranes, 4 used exclusively by Sea/land. Also handles roll-on/roll-off vessels.
Waalhaven (Pier 7): Max. draft 12.2 m. (40 ft.) (FW). Operated by Multi Terminals Unitcentre B.V. operates 5 container cranes, capacity 60 tons. Length of quay 800 m.
Waalhaven (Pier 2): Max. draft 10.36 m. (36 ft. FW). Operated by Multi Terminals Waalhaven B.V. Multi-purpose terminal with Ro/Ro ramps, length 1,500 m. Cranes: 19×5 tons, 4×17.5 tons, 2×36 tons and 2×60 tons.
Waalhaven-Heyplaat: Max. draft 9.6 m. (31 ft. 06 in. FW). Multi-purpose terminal. Length 790 m. Ro/Ro ramp. 5×40 ton cranes.

L.A.S.H.: Vessels discharge and load at buoys in Waalhaven. Average permissible draft at buoys 36 ft. (FW). Max. draft at Buoys 6, 12 and LASH buoys, 40 ft. (SW).

Esso Chemie N.V.: The fertiliser plant in Europoort produces ammonia, urea, nitric acid, calcium ammonium nitrate.

Max. size: 39,000 d.w.t., length 690 ft., draft 42 ft. 06 in. in SW.

CUSTOMS ALLOWANCES: Spirits: first arrival each month, 5 litres per vessel plus 1 bottle per man. Otherwise, 0.75 litre per man with a max. of 5 litres per vessel. Wine: 5 litres per man.

Each Crew member permitted out of bond 200 cigarettes, or 25 cigars, or 500 gm. tobacco.

TANKER BERTHS:

Europoort

Installation	*Basin*	*No. of berths*	*Max. SW draft*	*Hoses*
Shell (No. 104)	Beneluxhaven	1	68 ft.	4 at 16 in.
(No. 103)	4th Petr. haven	1	57 ft.	4 at 16 in.
(No. 102)	4th Petr. haven	1	52 ft.	4 at 12 in.
(No. 101)	4th Petr. haven	1	46 ft.	4 at 12 in.
Maatschap	4th Petr. haven	2	46.5 ft.	3 at 12 in.
(Chevron/Esso)	5th Petr. haven	2	68 ft.	3 at 16 in.
Gulf	5th Petr. haven	1	53 ft.	4 at 12 in.
		1	47 ft.	5 at 10 in.
		1	42 ft.	
B.P.	6th Petr. haven	2	68 ft.	4 at 12 in.
		1	43 ft.	4 at 10 in.
		1	40 ft.	4 at 10 in.
		2	38 ft. and 32 ft.	
Maatschap Europoort Terminal	7th Petr. haven	2	68 ft.	4 at 16 in.
Europak	7th Petr. haven	2	68 ft.	4 at 16 in.
Matex Europoort	7th Petr. haven	1	68 ft.	
		1	39 ft.	
MOT	8th Petr. haven	2	68 ft.	
Botlek				
Esso	3rd Petr. haven	2	38 ft.	2 at 10 in.
		1	38 ft.	
Tank Terminal Rotterdam	Torontohaven	4	42 ft.	
Nieuwe Matex	3rd Petr. haven	6	39.5 ft. (FW)	4, 6, 8, 12 and 16 in.
	Vlaardingen	3	37 ft. (FW)	
Paktank	3rd Petr. haven	4	39.5 ft. (FW)	4, 8 and 14 in.

Pernis (Max. LOA 810 ft.)

Installation	*Basin*	*No. of berths*	*Max. draft*	*Hoses*
Paktank	2nd Petr. haven	2	37.5 ft. FW	10 and 14 in.
Panocean	1st Petr. haven	2	32.8 ft. FW	8 and 10 in.
Shell	1st Petr. haven	7	39.5 ft. FW	4 at 8 in.
	2nd Petr. haven	7	39.5 ft. FW	4 at 8 in.
Chevron/ Texaco	2nd Petr. haven	1	32 ft. FW	3 at 12 in.
		1	35 ft. FW	3 at 12 in.
Mobiloil	2nd Petr. haven	1	33 ft. FW	6 and 8 in.

No facilities for discharging dirty ballast at Mobiloil, Chevron/Esso at 5th Petrol Haven, Tank Terminal Rotterdam, Panocean and Paktank.

No bunkers (ex-installation) at Mobiloil, Tank Terminal Rotterdam, Panocean and Matex Europoort.

Maasvlakte: No restrictions on length or beam. On entering tugs are made fast just inside the breakwater. On departure tugs hawsers must be used aft. Max. draft 68 ft. Two berths available. Storage capacity 4.3 million tons. No bunkers available ex-installation. Shore facilities for dirty ballast available.

DENSITY: *Europoort* – At high water 1025; at low water 1022.
Botlek – At high water 1014; at low water 1001.
Waalhaven and other basins in the Rotterdam port area: at high

water 1004; at low water 1000. All depending upon amount of fresh water carried down river.

STEVEDORES: Normal working hours:

1. *Bulk cargoes except grain:* Monday 0730 – Saturday 1400 hrs. uninterruptedly.

2. *Bulk grain:* Monday–Friday 0730–1130; 1200–1600 hrs. Saturday 0730–1130; 1200–1530 hrs. Nightshifts: Monday–Thursday 1630–2030; 2100–0045 hrs. Friday 1630–2030 hrs.

3. *General cargo:* Monday–Friday dayshifts 0730–1600 hrs. Nightshifts: 1630–0045 hrs.

4. *Oil:* Continuously, including weekends, except the oil storage companies Pakhoed and Nieuwe Matex, which work from Monday till Friday during daytime only, unless overtime arrangements are made.

Agents should be kept closely advised of vessel's position. In view of ordering gangs for next morning/evening Master's final ETA message is required before 1400 hrs. For work on Monday mornings a final ETA is required before Friday 1400 hrs.

MEDICAL: All medical facilities available. Advance notice only in emergency or if attendance required during week-end.

OPENING/CLOSING HATCHES: On liners by stevedores. On tramp vessels by crew; stevedores lifting beams.

FRESH WATER: Can be supplied ex quay at many berths. Where no shore connections are available and at buoys: by waterboat.

Fresh water can also be supplied in the Roads off the Hook of Holland, weather permitting.

FUEL: All types of oil bunkers can be supplied by means of barges or ex shore installations for tankers. Coasters can take bunkers ex installation during their inward or outward passage. Advance notice is required for vessels which are only 24 hours or less in port and for bunkering during week-ends.

FIRE PRECAUTIONS: No floating objects are allowed alongside tankers during discharge or loading of dangerous cargoes and during ballasting.

DEVELOPMENTS: Adaption of the approach channel and harbour mouth for ships with a draft up to 72 ft. is in preparation.

On Maasvlakte, new container facilities, a coal terminal and LNG/LPG storage are being contemplated.

General cargo handling will benefit from a redevelopment scheme for the pre-1939 port area.

Preparatory studies are carried out in view of the replacement of the shore based radar chain by a highly sophisticated vessel traffic management system.

GANGWAY/DECK WATCHMEN: Recommended.

CERTIFICATES: Ship's Register and Derating Exemption Certificate.

CONSULS:

Austria	10 Westerlaan	Tel: 642621
Bangladesh	55 Calandstraat	Tel: 363781
Belgium	11 Koningin Emmaplein	Tel: 363633
Bolivia	94 Meent (Minervahuis II)	Tel: 333444
Brazil	45 Stationsplein (Groothandelsgebouw)	Tel: 119656
Cape Verde Islands	125 Rochussenstraat	Tel: 366977
Costa Rica	106 Meent	Tel: 130320
Cuba	45 Stationsplein (Groothandelsgebouw)	Tel: 128970
Cyprus	56 Westerstraat	Tel: 131809
Denmark	27 Westerkade	Tel: 360440
Dominican Republic	133e Schiekade	Tel: 670444
El Salvador	28 Parklaan	Tel: 365500
Finland	28 Parklaan	Tel: 365500
France	57 Eendrachtsweg	Tel: 116315
German Fed. Republic	36 Parklaan	Tel: 365133
United Kingdom	18 Parklaan	Tel: 361555
Greece	187a Schiedamsesingel	Tel: 332400
Guatemala	132 Meent (Beursgebouw, room 517)	Tel: 120070
Haiti	51 Mecklenburglaan	Tel: 138937
Honduras	5 Westplein	Tel: 362700
Iceland	25 Scheepmakershaven	Tel: 117580
Ireland	23 Willemskade	Tel: 143322
Italy	24 Eendrachtsweg	Tel: 139361
Japan	89 Coolsingel	Tel: 632818
Luxembourg	44 Kraandrijverstraat	Tel: 845011
Morocco	42 Eendrachtweg	Tel: 143088
Mexico	45 Stationsplein (Groothandelsgebouw)	Tel: 126084
Monaco	48 Westersingel	Tel: 363666
Nepal	160 Gordelweg	Tel: 656566
Nicaragua	292 Kleiweg	Tel: 185185
Norway	12 Willemskade	Tel: 144488
Pakistan	31 Westerkade	Tel: 360877
Panama	723 Weena (Groothandelsgebouw)	Tel: 138512
Paraguay	5d Gedempte Botersloot	Tel: 139801
Peru	321 Mathenesserlaan	Tel: 770946
Philippine Republic	21 Houtlaan	Tel: 176319
Portugal	18 Willemskade	Tel: 111540
Spain	19c Delftsestraat	Tel: 133400
Sweden	6 Westblaak	Tel: 132835
Switzerland	723 Weena (Groothandelsgebouw)	Tel: 139535
Tunisia	30 St. Jobsweg	Tel: 763099
Turkey	67 Eendrachtsweg	Tel: 132270
United States of America	1 Vlasmarkt	Tel: 117560
Uruguay	75 Coolsingel	Tel: 118382

REPAIRS: Yards of various capacities are available for new building, engineering and all types of repairs.

DRY DOCKS: Largest dry dock for vessels up to 500,000 d.w.t. with tank cleaning installation for largest vessels.

REPATRIATION: All arrangements for crew changes and repatriation can be made.

AIRPORT: Rotterdam airport Zestienhoven (distance 6 km.) and Amsterdam airport Schiphol (distance 70 km.) are served by regular airlines.

TIME: During Winter GMT plus one hour. During Summer GMT plus 2 hours.

HOLIDAYS: New Year's Day; Easter Monday; Queen's Birthday (30th April); Ascension Day; Whit Monday; Christmas Day (25th December) no work; Boxing Day (26th December).

POLICE/AMBULANCE/FIRE: Police head office tel. 14.31.44; Alarm and accidents tel. 14.14.14; Ambulance tel. 13.50.00; Fire tel. 29.29.29.

TELEPHONES: At major shipyards, oil and grain terminals telephone is placed on board without extra charge.

DEGASSING/CLEANING: Free translation of circular issued 17th April 1973 by the Docks Industry of the Municipality of Rotterdam, reads: Safety requirements in regard to degassing/cleaning of tanks and/or holds on board ocean tanker vessels.

A recent accident during cleaning activities of tanks having contained combustible gases or liquids, poisonous or not, has resulted in the following directives to maintain the safety and to protect the environment in the dock area.

The articles 55 and 56 of the Port Regulations Rotterdam (Municipal Gazette 1971, No. 3) prescribed a written consent of the Port Superintendent for degassing/cleaning. To obtain such a written consent on behalf of an ocean tanker vessel, the Captain should apply to the Office of the Port Superintendent, Department of Dangerous Substances, at least 24 hours before the actual cleaning. Conditions may be made in respect of, and amongst other things:

(*a*) safe cleaning procedure, and
(*b*) presence of an expert.

To that effect an investigation may be held on board as to a safe rinsing procedure, and relevant subjects, in consultation with the ship's management.

A statement may be demanded from the Captain stating whom he charges with the supervision of the activities. From this person expertise is demanded, to the satisfaction of the Port Superintendent. This "Expert" may be a member of the ship's crew, respectively a person to be designated by the Owner (e.g. a laboratory expert). Without the express consent of the Port Superintendent cleaning must not be started.

These measures have become effective at once and are applicable to all ocean tanker vessels, of which the tanks to be cleaned have contained a combustible liquid as its last contents with a flash-point lower than, or equal to, 55° C.

For ships berthed at a shore tank-cleaning station and handled by that company, the cleaning-company concerned shall be liable for a safe treatment and consequently no separate consent shall be required.

In the following summary, the ship's data necessary to obtain a consent has been stated.

The cleaning of tanks, as indicated in this circular, is not permitted without the consent of the Port Superintendent of Rotterdam. Concerning stench-causing substances further directives will be issued.

It will be tried to restrict the delays possibly occurring as a result of this new regulation minimum.

Summary: By "degassing" to be understood: Degassing or ventilating a tankage, steaming or cleaning and the activities related thereto.

Reporting: At least 24 hours before commencement of the cleaning activities the ship (ship's Agent) should make a request by Telex to the Port Superintendent of Rotterdam (Port co-ordinating centre) to obtain a consent pursuant to Art. 55 or 56 Port Regulations Rotterdam. 35 Lloydstraat, Rotterdam. Telex: GEVST 25720.

The following data should be stated when making the application: (1) name ship; (2) nationality; (3) tonnage in g.r.t.; (4) name Agent; (5) berth where cleaning is to be carried out; (6) indication of tanks to be cleaned; (7) correct technical denomination of the last 2 products carried in these tanks; (8) expected time of commencement cleaning; (9) cargo still on board; (10) by whom cleaning will be carried out (ship's own crew respectively name cleaning company); (11) destination slush (remaining on board respectively discharge to . . .).

GENERAL: The following was received from Agent in December 1978.

New reporting procedure for deep draft vessels:

Vessels drawing over 174 m., (57 ft.) SW and/or over 250 m. in length, have to make use of the approach channels "Eurogeul" and "Maasgeul". Such vessels should report their ETA 6 hours prior to their arrival at the Pilot "rendezvous" location in position Lat. 52° N. Long. 03° E. by means of a radio telegram to "Traffic Centre" Hook of Holland (TCH) via Scheveningen Radio (PCH). This telegram is at the same time valid as ETA message to "Pilotage Hook of Holland" for the supply of a Pilot.

The telegram should contain:

a. Name and call-sign
b. GRT and deepest SW draft
c. ETA at "rendezvous" position
d. Confirmation of the following equipment in good working order:
   1. Gyro compass
   2. Radar installation and VHF operational on Channels 6, 14 and 20
   3. Decca receiver mark 12 or 21 provided with a connection for the Brown Pattern Indicator (Brown Box Connection).

If a T.O.R. installation is on board the "Traffic Centre Hook" messages can be relayed via Dirkzwager's "message-relay and ships reporting station", telex No. 26751 "dirk nl". Dirkzwager will deliver the message to all parties concerned.

Example: Message from s/t "Meta" to "Traffic Centre" Hook of Holland:

Trafficcenter hookofholland
meta pjuk ETA 52n03e 8/12 1300 lt grt 105532.47 maxdraft 61feetsw gyrocompass radar vhf channels 6 14 20 decca receiver mark 12 fully operational brownbox connection

Upon departure we, as Agents, have to give 6 hours notice to "Traffic Centre Hook", tel. 01819-12411. This notice, which can be given via Dirkzwager as well, should state the following details:

1. Estimated time of sailing.
2. Draft.
3. Cargo.

Inspection of International Safety Certificates:
As from January 1st, 1979 Harbour Pilots on board foreign vessels entering the port area of Rotterdam will keep a check on the presence of valid international safety certificates according to the "International Convention for the Safety of Life at Sea 1960" and the "International Convention on Loadlines 1966".

This check will be executed on behalf of the State Shipping Inspection to which Harbour-Pilots have to report. The Harbour-Pilots entrusted with this inspection are in the possession of an authorisation provided with photograph issued by the State Shipping Inspection (Scheepvaartinspectie). Should the reporting of a Harbour-Pilot be negative, any measures to be taken will solely remain the task and responsibility of the State Shipping Inspection.

"Off Port Notice" clause:
Large grain vessels still often have to wait off the port for a berth. For that reason a proper "Off Port Notice" clause is still recommended in order to avoid loss of time and sometimes heavy shifting expenses.

Control on delivery of cargo:
At Rotterdam, bulk grain cargoes are mainly discharged direct overboard into receivers' barges. Therefore, a careful supervision by an independent control company is recommended so as to make sure that no cargo is delivered to receivers before original Bills of Lading have been presented.

AUTHORITY: Havenbedrifzj der Gemeente, Rotterdam.

AGENT: Wm. H. Muller & Co. Scheepvaartagenturen B.V., Westerlaan 1, P.O. Box 770, 3000 AT Rotterdam. Tel. 010-36.43.00. Telegrams: "Mineral". Telex 21245 (3 lines).

TERNEUZEN: 51.20 N. 03.50 E. (See Plan Book)

LOCATION: At mouth of the ship canal from the River Scheldt to Ghent. Lat. 51° 20′ 14″ N., Long. 3° 49′ 39″ E.

DOCUMENTS: Also see "Rotterdam". Customs clearance takes place in the docks, except vessels bound for Belgium. Clearing of ships comprises the production of a document signed by the Master, accompanied by the following documents in triplicate: Cargo and Crew Manifest, and Stores List. Masters are requested to have Crew List completed beforehand to avoid delay in the lock.

PILOTAGE: Compulsory for all sea-going vessels entering, leaving, and navigating inland waterways. Sea Pilot meets inward vessels at buoy A1, 51° 22.00′ N. 2° 53.24′ E. for ships entering by Wielingen channel; or at Middensteen Bank buoy, 51° 39.30′ N. 3° 19.00′ E. for ships entering by the Oostgat channel.

In Wielingen channel Belgian and Dutch Pilots available. In Oostgat channel a Dutch pilot cutter is stationed. Belgian pilot boat carries at the masthead a red flag with a white letter P, the Dutch pilot boat has a blue flag with a white letter "L". Communicate with pilot cutter by VHF Channel 6.

Warning: In approaches Masters may encounter fishing boats steaming a parallel course about 300 ft. apart. The net is being towed between the two vessels. If there is danger of fouling the net, the fishing vessels will display by day International Code flag D, or by night a searchlight from each vessel.

ANCHORAGE: Vessels anchor outside fairway where depth is at least 49 ft. Mud bottom and good holding ground.

RESTRICTIONS: No restrictions on night entry.

MAX. SIZE: Controlling depth 31 ft. 4 in. Keel clearance 3 ft. 0 in. Height of tide 12 ft. to 15 ft. A vessel of max. draft 40 ft. 6 in. can reach Terneuzen in most circumstances.

Ships not exceeding the following dimensions are allowed to pass through west lock and canal: length 230 m., breadth 31 m., draft in fresh water (canal) 11.75 m.

With special permission: length 245 m., breadth 33 m., draft in fresh water (canal) 12.25 m.

HEALTH: Arriving vessels are only subject to medical examination when arriving from countries where contagious diseases reported or when such cases suspected on board. Medical Officer will board in Terneuzen roads or Outer Harbour.

RADIO: Communicate via Flushing radio Channel 14, 156.70 mHz. 24-hour watch kept. From five minutes past every hour to ten minutes past the hour switch to Channel 16 for traffic list and navigation reports.

Communicate before entering the West outer harbour Terneuzen by VHF Channel 11 (156.55 kHz), 24 hours watch kept.

Each hour a weather bulletin, navigation reports and warnings are given.

TUGS: Towage not compulsory. Tugs can be ordered from Terneuzen tugboat company or Towage and Salvage Union Ltd. respectively by Channel 13, 156.65 mHz, and Channel 3, 156.15 mHz. Stations manned continuously for ordering tugs and general information.

BERTHING: The port has three outer harbours: West, East and Ferry. The West harbour has two locks (West and Middle), which is mainly used by sea-going vessels. The East harbour has one lock (East lock) for inland craft, while the Ferry harbour (no locks) is used mainly by fishing craft and yachts. Ships not exceeding the following dimensions are allowed to pass through the West lock and canal: length 245 m., breadth 33 m., fresh water draft (canal), 12.25 m. Middle lock is under construction and cannot be used. East lock: ships of a length 139 m., breadth 23 m., fresh water draft (canal), 3.50 m. can pass. There are four harbours on the East bank of the canal situated about one mile South of Terneuzen locks. *Noorderkanaalhaven* (Northern Canal Harbour) length of North Quay, 170 m., maximum draft 5.50 m.; South quay, 192 m., maximum draft 5.50 m.; in the middle of the harbour maximum draft 7.50 m. *Zuiderkanaalhaven* (Southern Canal Harbour) length of North quay, 225 m., maximum draft 2 m.; South quay, 230 m., maximum draft 5.75 m.; in the middle of the harbour maximum draft 8.25 m. and 5 m.

Massagoedhaven (Bulk Harbour) length of quay 504 m., maximum draft 12.25 m. and 6.50 m. *Zevenaarhaven* (Zevenaarharbour) length of North quay 421 m., maximum draft 8.25 m.; South quay, 259 m., maximum draft 8 m., in the middle of the harbour maximum draft 9.50 m. *Sluiskil* (sub-port, about four miles South of Terneuzen) length of quay, 775 m., maximum draft 10 m. to 10.50 m. *Sas van Gent* (sub-port, on the canal about seven miles South of Terneuzen) length of quay, 210 m., maximum draft 7.50 m.

There are several sheds and warehouses, total capacity 160,000 sq. ft., also open storage, total capacity, 100,000 sq. ft. Grain silo with a storage capacity of 10,000 tons. Vessels up to 80,000 d.w.t. which for some reason have to anchor outside the piers can do so on the River Scheldt near buoy No. 27. Ships with maximum draft of 40 ft. 6 in. can reach Terneuzen under practically all circumstances.

Cranage: 12 movable cranes of 5 tons capacities; three floating cranes, one 8.5 tons and two 16 tons; one floating derrick of 40 tons. At Sluiskil there are two coke-loading plants, three cranes of 15 tons and four loading bridges. Sas van Gent has two 5 ton cranes. Water and provisions available.

Container and Ro-Ro facilities: Ro-Ro harbour, width 24 m., maximum draft 6.75 m. Ro-Ro berth Zevenaarharbour South, width 15 m., maximum draft 9.50 m. Ro-Ro berth Zevenaarharbour-North, width 28 m., maximum draft 8.25 m. In Zevenaarharbour a Ro-Ro berth for two vessels, depth 10 m. and 7.50 m.

Ore and Bulk Cargo Facilities: Available at the Massagoedharbour.

MEDICAL: Two modern hospitals available.

FRESH WATER: Available from water barge.

FUEL: Fuel oil and lubricating oil available from lighter or tanker barge. Bunker coal available by prior arrangement.

GANGWAY/DECK WATCHMEN: Available. Tariff increase 100% on Sundays and holidays.

OPENING/CLOSING HATCHES: Can be effected by crew or stevedores.

CUSTOMS ALLOWANCES: See "Rotterdam".

IDENTIFICATION CARDS: Not required.

REPAIRS: Terneuzen Shipbuilding Yard situated at junction of East and West Canal branches. Able carry out hull and engine repairs. Floating cranes and diving equipment available.

DRY DOCKS: Dry-docking only possible for coasters, length 345 ft. width 39 ft. 6 in., draft 11 ft. 6 in.

TIME: GMT plus one hour.

HOLIDAYS: See "Rotterdam".

SERVICES: Repairs of radio radar, etc., can be effected.

SHORE LEAVE: Allowed.

DEVELOPMENTS: Plans made to widen and deepen Outer Harbour, also extension to southern Canal Harbour and Zevenaardok Harbour.

AUTHORITY: Havenschap Terneuzen.

AGENT: See "Flushing".

VLAARDINGEN: 51.54 N. 04.20 E.

On the Waterway about 5 miles from Rotterdam.
DOCUMENTS: See "Rotterdam".
PILOTAGE: Harbour pilots are always available.
TUGS: Available.
BERTHING: *Old harbour (municipal):* For tugs and inland craft. Depth at entrance 10 ft. at LW. Total length of quay 2,000 m.
Koningin Wilhelminaharbour (municipal): Depth 12 to 17 ft. at LW. Length of quay 1,300 m.
Vulcaan harbour (private): Suitable for vessels up to a draft of 10 m. (33 ft.) at LW. Stevedoring by: Frans Swarttouw's Havenbedrijf.

Length of quay for cargo-handling: 750 m. Phosphate loading jetty (on riverside) for barges 140 m. 3 electric 16-ton cranes, 3 electric 6-ton cranes and two 5-ton mobile-cranes. Belt conveyors on phosphate jetty. Large shed with a capacity of 30,000 tons and 6 storage tanks with a total capacity of 90,000 tons for various bulk cargoes.
Nieuwe Matex Wharfs (private): 3 berths for sea-going vessels on riverside up to 35 ft. draft at LW. Several berths for barges and coasters on innerside of jetty up to 22 ft. draft.

Large tank installation; bonded warehouses. 424 storage tanks (total) capacity 450,000 cu.m. for vegetable and mineral oils, molasses, latex and chemicals.
Lever's Soap Company Jetty (private): Jetty 75 m. max. draft 10 ft. at LW. (no harbour dues).
N.V. Van Neerbos Ind. en Handel My. Jetty (private): Length of jetty 70 m., max. draft 10 ft. at LW. 1 electric 3-ton crane.
Royal Shell Jetties (private): 4 jetties, length 25 m. each, with berths for vessels up to 12 ft. draft. Tank installation for mineral oils; 77 tanks, total capacity 412,640 cu.m.

Harbour dues by arrangement.
Windmill Fertilizer Works Harbour (private); Length of harbour 300 m. max., draft 11 to 14 ft. at LW. One jetty on riverside, length 105 m. Max. Draft 16 ft. at LW. Harbour dues by arrangement.
FRESH WATER: Available by barge.
FUEL: Available by barge.
REPAIRS: *Ship Repair Yard "H.V.O."* All kinds of repairs undertaken. Dry dock for vessels of 4,000 and 900 d.w.t. in Koningin Wilhelminaharbour. Broadside slipway of 400 ft. (cap. 3,500 tons) in Vulcaanharbour (Western part). Outfitting quay of 1,100 ft. length.
Machinefabriek Kreber: Builders and repairers of boilers, engines and various kinds of dredgers.
AIRPORT: Rotterdam Airport (designed for international short and medium haul air traffic) lies at a distance of 10 km. from the Vlaardingen port area.
AUTHORITY: Municipal Harbour Master.

NOTES

Please also advise Shipping Guides Ltd.

Netherlands Antilles

BARCADERA, Aruba: 19.29 N. 70.00 W.

(See Plan Book)

The industrial harbour of Aruba, situated three miles S.E. of Oranjestad.
DOCUMENTS: Documents and all general information, refer to "Orangjestad".
PILOTAGE: Compulsory.
RESTRICTIONS: Harbour open day and night. Depth of water in entrance and throughout harbour is 36 ft. Swinging basin width 1,000 ft.
MAX. SIZE: Max. LOA 232 m., max. draft 33 ft.
TUGS: Available.
BERTHING: 1,150 ft. of dockside accommodation.
FRESH WATER: Not available.
FUEL: Can be supplied.
AUTHORITY: See "Oranjestad".

BONAIRE TERMINAL (Brasil): 12.13 N. 68.23 W.

(See Plan Book)

OPERATORS: Bonaire Petroleum Corporation N.V. Transhipment Terminal receives crude oil shipped from its source in Very Large Crude Carriers (VLCCs). The crude is stored in tanks on shore and reloaded into large and medium range tankers for subsequent unloading at a refinery or other terminal.
LOCATION: The steel jetty is situated on the South coast of the northern portion of the Island of Bonaire in Lat. 12° 13′ 12.9″ N. and Long. 68° 23′ 17.2″ W.
DOCUMENTS:

3 Crew Lists.
1 Stores List.
1 List of personal effects of crew leaving.
1 Medicine and Drugs List.
Health Certificate from last port.

PILOTAGE: Compulsory. The Pilot-Berthing Master will board the vessel at the established arrival point in Lat. 12° 10′ N. and Long. 68° 25′ W., which is 3.6 miles, 208° True from the jetty.

The Pilot will embark from one of the tugs or launches assigned to assist the vessel in the berthing operation. The Pilot will assist the Master in every way possible to manoeuvre the vessel from the arrival point into the berth with the assistance of the 2 or in case of a VLCC 3 tugs and utilizing the services of 1 or 2 mooring launches to run mooring lines from the vessel to the breasting and mooring dolphins.
ANCHORAGE: There is no anchorage area at Bonaire for tankers; therefore, if the berth is occupied, vessels will be appropriately instructed to remain within radio/telephone (VHF Channels 16 and 13) radius pending advice with respect to a clear berth or other advices.
NAVIGATION: Navigable waters surrounding Bonaire Island are clear; however, the coasts of the Island are steep-to and should be avoided. The currents in the offing and off the points of the Island set Westward. On days with little wind a weak current sets to the Westward, generally parallel with the coast from Kralendijk Roads toward Wekoewa Point and parallel to the coast line in way of the jetty. It is urged that reference be made to the British Admiralty South American Pilot Volume V or United States HO Pub. 22 Sailing Directions for the West Indies Volume II or equivalent publication of the Netherlands Government.

Lacre Point, on which a light is shown, is at the Southern extremity of Bonaire. A light is situated on Boca Spelonk, the Eastern mid-point of the Island. Seroe Bentana Light, situated near the Northern extremity of the Island, is visible for approach from the N.E. through N.W. South of 250°/070° on the West side of the Northern end of the Island this light is obscured and then jetty lights and Radio Netherland Towers may be used for bearings.

Prevailing winds are the E.N.E. trade winds.
HAZARD ZONE: *Radio Transmitting Installation:* Vessels approaching Bonaire should remain clear of an area within a radius of 3 nautical miles from the Radio Netherlands Towers situated on the Island of Bonaire in Lat. 12° 13′ N. and Long. 68° 19′ 15″ W. This area is noted as a danger area due to strong radiation from the powerful radio transmitters on shore. Bonaire Terminal is situated sufficiently West of this area to be well clear of any radio radiation influence.
RADIO: When a vessel leaves its loading port, the shipper should advise the date of anticipated arrival at Bonaire. For vessels departing from remote loading ports, the estimated arrival date should be revised at least once each week while the vessel is en route.

A government wireless/telegraph station operates daily from 0700 to 2130 hrs. local time (1100 to 0130 GMT). Vessels bound for Bonaire should route their messages for Bonaire through Curacao Radio (PJC).

Arrival Advice: The Master should advise his estimated time of arrival not less than seventy-two (72) hours in advance, again forty-eight (48) hours in advance and again twenty-four (24) hours prior to arrival, and this last message should be revised if an unusual change in the estimated time of arrival should occur. Wireless telegraph messages of this nature must be sent to the ship's Agent who, in turn, will immediately relay the information to the Terminal management.

The text of any one of the arrival advices should contain the following data in addition to the declared time of arrival:

1. Draft of vessel, fore and aft.
2. Available fittings, i.e. number and diameter of connections at deck manifold system for prompt connecting of two 24 in. and/or two 12 in. steel swivel loading arms.
3. Any conditions which may affect loading or unloading operations.
4. Any unusual condition which may require abnormal attention prior to berthing.

VHF: International VHF Maritime Band Communication should be commenced within a radius of thirty (30) miles from the Terminal, or more, if possible. The Terminal may be called on International VHF Channel 16 (156.800 mHz). When radio/telephone contact with the Terminal has been established, communication should then be shifted to Channel 13 (156.650 mHz).

After initial radio/telephone contact has been established, radio/telephone communication with the Terminal will remain on Channel 13. This will include communication with the two tugs and the two mooring launches on standby, all of which will be available to assist the vessel into the berth.

Mooring, Unmooring VHF Communication: Communication on Channel 13 during the immediate approach and mooring procedure will be confined rigidly to berthing operations which includes all directives from the Berthing Master to the tugs, the mooring launches and the jetty. The only messages which may interfere with these communications will be those caused by an extreme emergency.

After the vessel has been secured in the berth and the Berthing Master has cleared all berthing operations, communication on VHF Channel 13 will be secured and all base VHF receivers will be returned to guard Channel 16 pending an emergency or when the Berthing Master resumes his function for a departing vessel. It is to be noted that hand radio/telephone sets transmit and receive only on Channel 13. The base sets in the terminal office and on each of the tugs and launches is equipped with radio/telephone equipment for transmitting and receiving on Channels 16 and/or 13.

Radio/Telephone UHF (Private Frequency): Communication between the platform and the vessel and the Terminal before, during and after transfer of product will be via portable intrinsically safe, hand carried, radio/telephones on a private UHF frequency.

Radio/Telephone VHF Resume use Departing: When the vessel is ready to depart and the Berthing Master has boarded and resumes his function, VHF radio/telephone communication will again be established on International Maritime Channel 13 between the vessel's bridge, the 2 or 3 tugs, the 2 mooring launches and the jetty so that the casting off operation may be properly accomplished.

Radio Telephone – Guard Call Channel 16: After the Berthing Master disembarks and the tugs are dismissed, and the vessel has departed full away, it is expected the vessel will resume a guard watch on Channel 16. The terminal station may be called on Channel 16 and/or 13.
TUGS: Tug assistance is compulsory. Mooring launches are available.
HEALTH: There are no health formalities; however, a health certificate from the last port must be presented to the Agent for submission to local health authority.
CUSTOMS/IMMIGRATION: When the vessel is secure in the berth and the gangway is landed on deck, the Immigration Officer, the Customs Officer and the Agent will board to attend formal entry of the vessel.

Immigration: Two copies of the crew list are to be ready for presentation to the Immigration Officer. Crew members must all be presented for Document check without delay or interruption of vessel's operation. Terminal gate watchmen are required to check all personnel re-entering the terminal. Therefore, appropriate crew passes are to be issued to each Crew member prior to shore leave.

Customs: The Customs Officer will require one crew list, one stores list, one list of personal effects for those crew men leaving the vessel at Bonaire and one list of all medicines and drugs. The Customs Officer with the assistance of the ship's Agent will prepare the Inward Clearance document. This document is to be signed by the Master. Upon completion of the above formalities, the vessel is declared free and shore leave may be granted.
BERTHING: The least depth of water in way of Berth No. 1 is 110 ft. (33.5 m.).

Mooring Facilities: Berth No. 1 consists of an operating platform 132 ft. 10 in. (40.48 m.) long facing the sea and 94 ft. (28.65 m.) wide toward the shore with two 24 in. and two 12 in. swivel jointed steel loading arms for the transfer of petroleum products. The waterfront side of the platform is 22 ft. 3 in. (6.787 m.) inside and away from the ship's side.

Breasting Dolphins: There are 6 breasting dolphins, 4 of which are designed for the vessel to rest against and to which forward and back spring lines are to be secured to heavy quick-release mooring hooks. At each end of the system of breasting dolphins there is one landing dolphin offset to allow a vessel 5° off the parallel line to land against the berth system. These are noted "a" for the offset dolphin and the main dolphin is noted "b". The dolphins are numbered from No. BD1a and BD1b in the West and through BD2, BD3 and BD4b and BD4a to the East. The centre line of the berthing facility is 17 ft. 5 in. (5.3 m.) East of the centre line of the operating platform. This point is well marked on the seaward panel of the platform with a 4 in. wide white reflecting vertical stripe. BD2 and BD3 are each

135 ft. (41.148 m.) West and East of this white vertical stripe. BD1b and BD4b are each 80 ft. (24.384 m.) further West and East respectively, from BD2 and BD3.

Mooring Dolphins: Inshore 215 ft. (65.532 m.) perpendicular from the berthing line are 6 mooring dolphins. These dolphins are numbered from MD1 in the West to MD6 in the East MD3 and MD4 are each 350 ft. (106.680 m.) West and East from the centre line of the mooring structure system noted by the white vertical stripe on the seaward face of the operating platform. MD2 and MD5 are each 250 ft. (76.200 m.) West and East respectively, from MD3 and MD4. MD1 and MD6 are each again 250 ft. (76.200 m.) West and East respectively, from MD2 and MD5.

Capstans: On each of the breasting and mooring dolphins there is a small capstan with sufficient power to heave up on to the deck of the dolphin a ship's mooring line for securing to the heavy quick-release hooks.

Mooring Lines: Prior to coming alongside, the vessel must have all mooring lines on station and available on that side which will be to the berth. Bearing in mind that the product transfer is via steel swivel loading arms, it is imperative that the forward and back spring lines be adequate to maintain a minimum fore and aft motion of the vessel to remain within the limitation of the envelope of the loading arms.

Spring Lines – Breasting Lines: The first lines lead out will be the forward and back springs after which the forward and after breasting lines lead to the appropriate mooring dolphins, and then the bow and stern lines lead to the appropriate mooring dolphins. The procedure may be altered in accord with physical equipment on the ship, weather and sea conditions, along with other circumstances, all subject to the Berthing Master's requirements and combined approval of the Master and terminal management.

Mixed Mooring Lines Prohibited: Mixed moorings are prohibited, i.e. a wire and a fibre rope in parallel service is undesirable due to unequal elasticity. All mooring lines must be so arranged that loss of effect cannot occur when slacking off or heaving in one line, as required, due to the rise or lowering of the vessel during discharge or loading of cargo.

Mooring Machinery – Deck Winches: All deck machinery used for the heaving in and control of mooring lines must be operable. A vessel having deck machinery in poor state of maintenance to that point where mooring lines cannot be hove tight or brakes that tend to slip under tension will be sufficient reason to require consideration of terminal management to refuse connecting of the steel loading arms, or if same are already connected and the mooring lines become insecure, all transfer of product will be stopped and the steel loading arms disconnected pending correction of the mooring situation.

Surge-Tension Controls Prohibited: Wire mooring lines not on winch drums are not to be used for spring lines. Mooring wires secured on surge and tension controlled winches are prohibited. All mooring lines must be secured positively, i.e. on winch drums with the brake properly drawn tight or properly secured on bitts.

Power to Deck Machinery: At no time during the period the vessel is in berth is the power to operate deck machinery to be shut off.

Motion of Vessel in Berth: The vessel, while loading arms are connected, must not be permitted any motion alongside or away from its proper position in berth.

Surveillance of Mooring Lines: Mooring lines must remain under constant surveillance during unloading and loading operations. Failure to ease tension on mooring lines during unloading or failure to maintain proper tension on mooring lines while loading will be sufficient reason to stop transfer of product.

Fire Warp – Emergency Towing Wire: After the vessel is all fast fore and aft, an emergency wire of suitable quality and strength to tow the vessel should be positioned on the offshore bow and the after offshore quarter of the ship. This towing wire should be so secured that the eye may be readily picked up by a towing vessel. It is required that the length of the wire hawser should be not less than one-half again that of the highest freeboard of the vessel at the point of its location on the ship where the ship end is well fast on bitts.

EMERGENCY SIGNAL: In the event of any form of emergency such as fire, bursting of transfer piping, overflow of vessel's cargo tank, etc., the Operating Platform emergency signal will be an intermittent signal on the general alarm system for not less than 15 seconds.

The vessel will use its own emergency signals in the event of any emergency on board. To coordinate any emergency procedure, the personnel on the Operating Platform must be advised of the vessel's emergency signals.

In the event of any emergency either on board the vessel or the operating platform all oil transfer must be stopped and all oil transfer valves closed.

LOADING: *Electric Bond – Earthing:* Prior to manoeuvring the loading/unloading steel mechanical loading arms toward the vessel from the Operating Platform, the electric bond wire must be connected to a clean metal contact on the vessel's oil cargo transfer system.

The electric bond wire shall not be disconnected until the loading/unloading mechanical arms have been disconnected and manoeuvred well clear of the vessel.

The flame proof switch on the jetty will remain open until the electric bond wire has been connected to the ship. Prior to disconnecting the electric bond wire from the ship, the flame proof switch on the jetty will have been opened.

Connection to Oil Transfer Piping Systems: In the berth there are two 24 in. and two 12 in. steel pipe swivel jointed loading/unloading arms. This equipment is entirely controlled from the deck of the Operating Platform. Connection of the fittings requires clean flat faced flanges on the vessel's oil transfer piping deck manifold, using a proper gasket, to ensure a secure tight connection.

Cargo and Ballast Transfer: Before transfer of cargo or ballast may be started, the Chief Officer and the Terminal Representative will ensure that all necessary controls and safety measures have been attended. A Declaration of Inspection is to be signed by a responsible Ship's Officer and the Terminal representative certifying that all precautionary measures have been taken, that all equipment used in the transfer operation is in proper order and that all concerned are in agreement on the proper procedure of the operation.

Discharge of Cargo: Upon advice from the Terminal Marine Supervisor to the Ship's Officer in charge that oil transfer may be started, the Officer will arrange for the initial flow to be slow with sufficient pressure to permit inspection of all transfer piping and connections for any leakage. When the terminal personnel advise they are receiving product, the flow may be increased to the rate agreed upon.

Completion of Cargo Discharge: After all cargo tanks have been drained and the pumps have lost suction and the discharge of cargo has been declared finished, the flow of product will have stopped. With the agreement between the Ship's Officer and the Terminal Marine Supervisor, the oil transfer valves on the Operating Platform will be closed. All product remaining in the unloading arms will be drained back into the vessel. If the vessel's pipe-line system does not allow the complete draining of the unloading arm, then arrangements must be made to drain the arm into a container or via a drain hose led into a cargo tank. *No product will be permitted to drain out onto the open deck of the vessel!* After the arms have been completely drained, they may be disconnected and the ends blanked off to prevent any drippage of oil.

Loading of Cargo: Upon advice from the Ship's Officer in charge that oil transfer may be started, the Terminal Marine Supervisor will arrange for the initial flow of product into the vessel. When the Ship's Officer advises that he is satisfied that product is flowing in accord with the loading programme, he will advise the terminal personnel and the flow will be increased to the rate agreed upon.

Communication, Audible, Visual: Constant contact with the personnel on the Operating Platform during the topping off procedure is mandatory! The rate of flow of product is to be adjusted to that point where complete control is constant and that in the event of an emergency immediate shut down will not create any pressure surge on the shore transfer piping.

Topping Off of Cargo Tanks: Every precaution must be observed to avoid over-filling of any tank or causing any listing of the vessel. Observance of the trim by the stern shall be constant to avoid any undue strain upon the vessel's longitudinal structure. The cargo tanks and pipe-lines thereto on most tankers are segregated into groups. One tank in each group should be selected for the overflow relief tank by maintaining the level of liquid considerably lower than the other filling tanks to permit prompt relief of that tank reaching an overfilled level.

Completion of Loading: After all cargo has been loaded all product remaining in the loading arms will be drained into the vessel. If the vessel's pipe-line system does not permit complete draining of the loading arms, then arrangements must be made to drain the arm into a container or via a drain hose led into a cargo tank. *No product will be permitted to drain out onto the open deck of the vessel!* After the arms have been drained they may be disconnected and the ends blanked off to prevent any drippage of oil.

BALLAST: *Ballast Loading:* Should the vessel have permanent ballast tanks with entirely separate pipe-lines and ballast transfer system sea water ballast may be loaded in accord with the Master's requirements.

Sea water ballast is not to be loaded into any cargo tanks or through any oil transfer system while there is any cargo on board the vessel. In the event of an emergency, special arrangements must be agreed upon with the terminal management for the loading of ballast into any cargo tanks before all of the cargo has been completely discharged.

The vessel's Senior Officer in charge will personally supervise the arrangement of the pumproom system for the ballasting operation. The Public Cargo Inspector will accompany the Officer into the pumproom to break the seals on the sea suction valves.

No sea suction valve may be opened until all down coming pipe-lines have been drained and are completely free of product and the down coming valve closed. In most instances the pumps should be operating just prior to opening the sea suction valve.

Ballast loading will be under the entire control of the ship's personnel and it is expected that all normal loading precautions will be observed.

Deballasting: En route to Bonaire the vessel should have thoroughly cleaned certain appropriate tanks for the containment of clean ballast for discharge overboard. Only dirty ballast (oil contaminated sea water) and tank cleaning slops are to be discharged into the terminal's ballast receiving system.

Ballast, Oily Water, Discharge: Under no circumstances will dirty ballast water be discharged overboard within a radius of 50 miles from any Netherlands Antilles Island.

Ballast Discharge to Shore; The quantity of ballast to be discharged into the terminal will be measured prior to commencement of discharge. After the steel loading arm to be used has been connected to the ship's manifold, the discharge of ballast water will be accomplished in the same manner as the discharge of cargo.

Tank Bottoms and Slops: Upon completion of the deballasting operation, all of the vessel's tanks will be inspected and approved for the reception of cargo. The sea suction valves will then be sealed in the closed position by the public inspector or by a Bonaire Petroleum Corporation N.V. representative. Any bottoms and slops remaining must have the approval of terminal management prior to "loading on top".

MEDICAL: Modern facilities are available for medical and dental treatment. A "Medical Service Request" form must be signed by the Master for crew members requiring medical or dental attention.

In the case of crew members having to be left behind at Bonaire for hospitalization or otherwise, Master must sign authorization guaranteeing expense of attention rendered and repatriation.

FUEL: Bunkers for steam propelled tankers are available

Bunker Transfer: During the period of time the vessel is in berth, the transfer of bunkers from one tank to another is prohibited. All bunkers to be consumed while in port must be available in that tank from which bunkers are normally consumed.

FRESH WATER: Fresh water on Bonaire is desalinized sea water and the supply is minimal. Small quantities may be supplied upon advance notice.

REPAIRS: There are no repair facilities on the Island of Bonaire. Upon sufficient advance notice, special service personnel and minor mechanical repair work may be arranged from Curacao. Transportation for such service personnel is via scheduled airline.

POLICE/AMBULANCE/FIRE: Tel. 8000.

CARGO INSPECTION: Along with the Government Boarding Officers the representative of the petroleum inspecting organization mutually engaged by the Shipper and Bonaire Petroleum Corporation N.V. will board the vessel for the purpose of gauging the cargo tanks, obtaining the temperature of the cargo and obtaining required samples. His function is to protect the interest of the vessel as well as the Shipper and the consignee. Every assistance is to be rendered to expedite his function on board the vessel. An Officer should accompany the Inspector while on board and should assist by making available all information requested such as cargo tank calibration tables, etc. Cargo transfer may not be commenced without the approval of the Inspector.

Completion of Discharge of Cargo – Inspection: Upon completion of discharge of the cargo, the Inspector will examine all of the cargo tanks and will sign the tank inspection certificate.

Loading Cargo, Inspection: In the case of a vessel arriving to load cargo, the Inspector will examine all of the cargo tanks to determine the condition of the cargo tanks for reception of the cargo. Upon completion of loading all of the cargo, the Inspector will gauge the cargo tanks, take temperatures and samples as required.

Incomplete or Part Cargo: In the event the vessel does not complete the discharge of cargo, or does not load a full cargo, the Inspector will board the vessel to gauge the cargo tanks to record the amount of cargo in the vessel after transfer operations have been completed.

Cargo Pumproom Sea Suctions: Prior to loading or unloading the Public Inspector will certify that the sea suction valves connected to the vessel's oil transfer system are closed, lashed and sealed. *Do not lock these valves under any circumstances.* These valves are to be sealed in the *Closed* position and sufficiently lashed so they may not open due to vibration or any other reason.

STORES/PROVISIONS/LAUNDRY: All stores and provisions are imported into the Island of Bonaire; however, small quantities of provisions may be obtained. There are no deck and engine stores available. Upon sufficient advance notice, small items not available on Bonaire may be obtained from Curacao.

Laundry service in small quantities may be arranged for through the ship's Agent.

DEVELOPMENTS: Second jetty under construction for vessels up to 80,000 d.w.t. Depth alongside will not be less than 55 ft.

SHIPMASTERS REPORT: 1977. *In his report the Master called the port – "Brasil".*

Documents:

5 Crew Lists.
3 Stores Lists.
3 Personal Effects Lists.
1 Vaccination List.

Immigration Officer acts on behalf of Quarantine service. State of health on board to be given in 72 hour ETA message.

Services:

Fresh water by truck from Kralendijk and very expensive. Very limited quantities of shipchandlery supplies. No deck or engine stores. Gas oil limited and by drums only. Bunker "C" only. Lube oil limited to some brands and limited supply by drums. Water and fuel oil chemical treatment available. Radio Holland Service Engineer available. Repair men can be flown in from Curacao. Very limited laundry service. If required at least 4 days notice advisable. Tankers from Mediterranean, Africa and Gulf should give ETA's 10 and 5 days as well as 72/48/24 hours, any of which to give arrival draft F & A, number and diameter of connections, any condition affecting loading or discharging, ballast quantity, clean or otherwise and slops quantity, Pilot advised that 10 days longest, so far, that vessel waited off for berth. Have adequate fresh water on board for this contingency.

Berthing: No. 1 Jetty: Least depth alongside 110 ft. Loading/discharging Chiksans 2 × 24 in. and 2 × 12 in. Max. Size 500,000 d.w.t.

No. 2 Jetty: Least depth alongside 60 ft. Loading/Discharging Chiksans 3 × 12 in. Max. size 80,000 d.w.t. Product handled: Crude. Max. pressure; 125 p.s.i.

VHF contact with BOPEC on Channel 16 at 25 miles, then standby on Channel 13 for instructions. On berth VHF supplied to maintain shore contact with control who pass messages to Agent at Kralendijk.

Immobilising of engines or transfer of bunkers not permitted on berth.

Port side alongside always.

BULLEN BAY, Curacao: 12.11 N. 69.01 W.

(See Plan Book)

Bullen Bay is an open bay on the South coast of Curacao, 8 miles N.W. of Willemstad.

DOCUMENTS: Documents and all General information, refer to "Willemstad".

PILOTAGE: Pilotage is compulsory and rendered day and night. There is no resident Pilot at the Bay anymore. Ships arriving are piloted by government Pilots supplied from Willemstad. Ships leaving are piloted by Pilots employed by the Curacao Oil Terminal.

Pilot Station: 1 mile S.W. of Cape St. Marie (that is the cape on the West side of Bullen Bay).

Communications: Ships destined for Bullen Bay are to inform Traffic Control at Willemstad (call "Fort Nassau" on VHF Channel 16) and also Curacao Oil Terminal at Bullen Bay (VHF Channel 11) of their approach. The Pilots at Bullen Bay operate on VHF Channel 9.

ANCHORAGE: There is no anchorage in the bay. Ships that have to wait for berth are to remain in the vicinity within VHF radio range.

MAX. SIZE: 500,000 d.w.t. on full draft LOA 1,350 ft.

TUGS: Compulsory. There are 2 tugs of 3,852 h.p. with 53 and 60 tons bollard pull and 1 tug of 2,500 h.p. with 35 tons bollard pull, stationed at Bullen Bay. 2 tugs will assist the tankers on their arrival and departure. 3 tugs will assist the VLCC's on their arrival and 2 tugs will assist on their departure.

BERTHING: *Curacao Oil Terminal:* Curacao Oil Terminal (COT) located at Bullen Bay facilitates economical trans-shipment of Eastern hemisphere crude arriving in very large crude carriers (VLCC's) for storage and on-carriage in smaller ships to draft restricted U.S. ports.

Jetties: Ships moor port side alongside.

Tanker jetties from East to West:
No. 1: 250,000 d.w.t. four 12 in. connections, heading 196°
No. 2: 70,000 d.w.t. four 12 in. connections, heading 177°
No. 3: 100,000 d.w.t. four 12 in. connections, heading 146°
No. 4: 540,000 d.w.t. four 16 in. connections, heading 129°
No. 5: 100,000 d.w.t. four 12 in. connections, heading 127°
No. 6: 350,000 d.w.t. four 16 in. connections, heading 124°

The tugboat jetty is located between Jetties No. 2 and 3.

Total tank capacity: 17,750,000 barrels.

1 –	1,000,000 barrels capacity –	1,000,000
16 –	750,000 barrels capacity –	12,000,000
6	375,000 barrels capacity	2,250,000
38 –	small tanks capacity –	2,500,000

Pipe-lines: Main track consists of 5 strings of 36 in. pipe. The jetties carry 2 strings of 36 in. pipe in a loop. The loading rate is up to 12,000 t.p.h. Tankers' discharge rate is up to 25,000 t.p.h.

Deballasting: Capacity 4,000 t.p.h. per jetty. Ballast treatment produces affluent of less than 20 parts per million (20 ppm) oil content.

Throughput:

Transhipment	1,200,000 barrels per day
Refinery import	250,000 barrels per day

Operators: Curacao Oil Terminal NV, PO Box 660, Willemstad, Curacao, Netherlands Antilles. Telex No. Curacao 1175.

FRESH WATER: Fresh water available at the piers.

FUEL: Bunker facilities for all grades are available at a rate of 3,800 barrels per hour.

NAVIGATIONAL AIDS: There is a leading range of 43° True bearing on the West side of the bay for ships entering the bay, running 851 m. (approx. 4.5 cables) clear of the shore near Cape St. Marie, with red daymarks and a green and (yellowish) red light at night.

AUTHORITY: Harbour Master of Curacao.

CARACAS BAY, Curacao: 12.04 N. 68.52 W.

Caracas Bay is an open bay on the South coast of Curacao, 6 miles S.E. of Willemstad. This port, mainly used by tankers, bunker ships and big passenger liners, is specially fitted as an oil terminal.

DOCUMENTS: Documents and all general informations, refer to "Willemstad".

PILOTAGE: Pilotage is compulsory and rendered day and night. There is no resident Pilot at the bay. Ships at Caracas Bay are piloted by government Pilots supplied from Willemstad.

Pilot station: 1 mile SW of Lijhoek (that is the cape on the West side of Caracas Bay).

ANCHORAGE: There is no anchorage in the bay.

MAX. SIZE: Vessels with a max. overall length of 1,050 ft. and max. draft of 45 ft. can be accommodated. Max. depth 47 ft.

VHF: Ships destined for Caracas Bay are to inform traffic control at Willemstad (call "Fort Nassau" on VHF Channel 16) of their approach. There is no VHF radio station at Caracas Bay.

TUGS: Tugboats operate from Willemstad. Tug assistance only for ships arriving. Tugs are automatically provided:

1 tug for tankers up to 20,000 gross tons.
2 tugs for tankers above 20,000 gross tons.
1 tug for cargo and passenger ships exceeding 16,000 g.r.t. and 600 ft. length.
2 tugs for cargo and passenger ships exceeding 30,000 g.r.t.
Ships leave without tug assistance.

BERTHING: 2 piers owned by "Shell Curacao Ltd." are built at the East side of the bay, naturally protected from prevailing wind and sea, with depths up to 47 ft. alongside. Vessels dock directly with their port-side along the piers. Pier No. 2, with a depth alongside of 47 ft., and pier No. 3, with a depth alongside of 47 ft., are newly built concrete piers/quays, modern and equipped for handling oil in bulk, with enough platform to serve also as passenger terminal. The biggest cruise ships moor along these piers regularly.

The oil is transported through pipe-lines from the refinery at Willemstad to the storage tanks at Caracas Bay. 2 ships can bunker simultaneously. New electrically-driven centrifugal pumps, metering and blending equipment at the bay stand for efficiency to reduce bunkering time. Subject only to the capacity of ships receiving connections, loading rates up to 2,000 t.p.h. of bunker oil can readily be achieved.

FUEL: The piers are built as oil piers, modern and equipped to supply any kind of bunker or lubricating oil to any vessel.

FRESH WATER: Fresh water can be obtained via pipe-line on the wharves.

STEVEDORES: Lighters and longshoremen are supplied from Willemstad.

REPAIRS: Small repairs can be done at the bay through working barges alongside.

GENERAL: Clearance, port administration, port charges and regulations are the same as at Willemstad.

AUTHORITY: Harbour Master, Curacao.

FUIKBAY, Curacao: 12.03 N. 68.50 W.

Fuikbay, on the South coast of Curacao, 7 miles South-east of Willemstad, is an inland bay with a 147 ft. wide navigable entrance. The depth of this harbour is 26 ft.

DOCUMENTS: Documents and general information, refer to "Willemstad".

PILOTAGE: Pilotage is compulsory.

RESTRICTIONS: As a rule vessels only enter this port during daylight. Sailing can take place day and night.

ANCHORAGE: There is an anchorage area in the West side of the bay.

MAX. SIZE: Vessels can enter and leave with a max. draft of 24 ft. and a max. length of 360 ft.

BERTHING: This bay is mainly used as a loading terminal of the "Mining Company Curacao" for export of phosphate rock mined out of the "Tafelberg". There is one berth under the conveyor which transports the phosphate rocks from shore into the holds of the vessel alongside. Depth alongside is 28 ft. There is also a 84 ft. berth available for handling explosives or other cargo, usually named Westwerf. Only small vessels with a max. draft of 8.25 ft. can come alongside. Vessels with more draft can moor with the help of floats between ship and quay.

The piers are privately owned by "Mining Company Curacao" situated on private territory of this company.

FUEL: This port has no bunker facilities, so vessels bound for this port must take bunkers in Caracasbay or Willemstad before or after calling at this port if bunkers are desired.

GENERAL: Other services such as tugboats, repairs, power, etc. are rendered from Willemstad. 5-ton mobile crane available.

AUTHORITY: Harbour Master, Curacao.

KRALENDIJK, (including Salina) Bonaire: 12.09 N. 68.17 W.

(See Plan Book)

DOCUMENTS:

	Customs	Immigration	Agent
Passenger list	1	2	2
Crew list	1	2	2
Personal effects list of crew	1		
Store list	1		
Curio list	1		

PILOTAGE: Pilot service is compulsory. Pilot meets vessels 1.5 miles S.W. of the berths. Pilot boat flies blue flag with letter "L" by day and red over white light at night.

ANCHORAGES: Unlimited. Depth 30 ft. and over.

RESTRICTIONS: Notify the Agent at least 24 hrs. in advance. No tide.

MAX.SIZE: Length 1,050 ft., also see "Berthing".

INWARD CLEARANCE: Inward clearance is effected on board immediately on docking. Immigration Officer arrives on board immediately after docking. Passengers disembarking at Bonaire must present themselves for documents check.

Customs Officer boards immediately after docking and together with a representative of the Agency's Shipping Department the inward clearance document of the vessel (in ballast or with cargo in transit, as the case may be) is prepared and signed. This document must be signed by the Master. Occasionally the Customs Officer may insist that the Master sign in his presence. Only upon completion of the above formalities, usually carried out in a very short time, is the vessel declared free and passengers and crew may go ashore. It is recommended that one of the public rooms be made available for the purpose of inward clearance in order to avoid congestion in the purser's office.

HEALTH: No health formalities.

RADIO: A Government Radio Station operates daily from 0700 to 2400 hrs. In case of emergency Bonaire Radio can be contacted by telephone. Vessels bound for Bonaire should route their messages for Bonaire through Curacao Radio (PJC). The Government Radio and Telephone Station maintains daily telephonic communication with Curacao, also with the United States, Europe, etc.

VHF: Call sign "Bonaire Pilots". Calling Channel 16. Working Channel 11. Rescue operations Channel 6. Watchkeeping 0800 – 1700 hrs. except Saturdays, Sundays and holidays. Plans being made for 24-hour service.

TUGS: Three 4,300 h.p. tugs are available. The Agent should be notified in advance if a tug is required, in order to make the necessary arrangements with the Petroleum Company.

BERTHING:

North Pier:

Berthing space	225 ft.
Depth	34 ft. alongside at LW
Height	6 ft.

Max. permitted load factor on pier is 2,000 kilos per sq. m.

Vessels of max. 30,000 g.r.t. or a max. length of 738 ft. are allowed to berth alongside.

Southern Pier:

Length	394 ft.
Width	46 ft.
Depth	50 ft.alongside
Height	6 ft.
Length of connecting bridge from shore to pier	199 ft.
Width of connecting bridge from shore to pier	68 ft.
Max. LOA	1,050 ft.

Mooring facilities:

A: Double Mampaey easy-release electrical capstans (100 tons each)
B: Two (2) bollards 50 tons each
C: Double Mampaey easy-release electrical capstans (100 tons each)
D: Bollards of 50; 25 and 10 tons (every 20 m.)

Fendering: Vredestein Gigant Fenders; Block fenders and D-fenders (made of rubber).

Roll-on/roll-off Facilities: At the South pier a small Ro-Ro platform for "coaster-size" ships and small "landing-craft" type. Max. permitted load factor 2,000 kilos p.sq.m. Depth 5 m.

Off the Harbour Office between the North pier and the South pier a Ro-Ro pier for ships up to 3,000 gross and/or a max. length of 90 m. Max. permitted load factor unlimited. Depth 6 m. Max. size: LOA 300 ft. Draft 16 ft.

For the mooring and unmooring at the pier shore labourers are engaged by Agents at the expense of the shipping line. Motor-boats are available for running lines.

Salina: This port is situated 4 miles South of Kralendijk and is owned by the Antilles International Salt Co., loading of salt in bulk only can be carried out at this pier.

Vessels of approximately 40,000 tons d.w.t. can be accommodated.

Depth alongside 45 ft. The Pilot will board vessels destined for this port 1.5 miles West of the jetty, from a motorboat displaying the signals as referred to for Kralendijk.

STEVEDORES: There are no regular stevedores (longshoremen) available in Bonaire. For cargo handling operations ordinary labourers are engaged by the Agents for account and risk of the ship.

Working Hours: Monday-Friday 0700-1200 hrs. and 1300-1600 hrs. Overtime possible.

MEDICAL: Modern facilities are available for medical and dental treatment. A "Medical Service Request" form must be signed by the Master or other authorised officer for crew members requiring medical or dental treatment. In case of crew members having to be left behind at Bonaire for hospitalisation or otherwise, Master must sign an authorisation guaranteeing expense of treatment and repatriation.

FRESH WATER: Limited quantities of fresh water from the Government Water distillation and power plant can be supplied at the pier.

FUEL: On advance request, bunkers are delivered by craft at rates comparable to those in Curacao or Aruba.

GANGWAY/DECK WATCHMEN: Watchmen are not necessary but recommended; Overtime as usual.

OPENING/CLOSING HATCHES: This work is normally carried out by crew.

IDENTIFICATION CARDS: Passengers. No landing cards required, but some ships carrying a large number of passengers furnish landing cards to passengers for their own control of passengers returning on board. Crew. No landing cards required.

REPAIRS: There are no facilities for carrying out major repairs.

HOLIDAYS: The following are the official holidays observed in Bonaire: New Year's Day (Jan. 1st); Good Friday; Easter Monday; Queen's Birthday (April 30th); Labour Day (May 1st); Ascension Day; Whit Monday; Kingdom Day (December 15th); Christmas Day (December 25th); Second Christmas Day (December 26th). Religious holidays: August 15th (Assumption Day); November 1st (All Saint's Day).

TIME: 4 hours. slow of GMT. No summer time kept.

AIR SERVICES: There is a good daily airplane service between Bonaire and Curacao. 3 or 4 flights a day with good connections at Curacao with the international services to and from many parts of the world.

CUSTOM OFFICERS ON BOARD: 1 or 2 Customs Officers will remain on board during the vessel's stay in port. Such officer(s) must be furnished meals at regular meal hours.

TELEPHONES: Telephone connection can be placed on board ships at the pier.

POLICE/AMBULANCE/FIRE: Police, tel. 8000; Ambulance, 8000; Fire, Tel. 8000.

GENERAL:

Live Animals: The importation of dogs, cats, horses and certain other animals is permitted, provided these animals are accompanied by a certificate issued at place of origin by a licensed Veterinarian, stating that the animal in question is free from any contagious disease.

Dogs must have, in addition, a certificate of Rabies Inoculation. All animals imported (including birds) will moreover be examined on arrival.

Prohibited Imports: The importation of the following is strictly prohibited: Parrots and parakeets, absinth, explosives, firearms, ammunition and firework, except with prior permission from local authorities. All kinds of narcotics and drugs, the sale and use of which is regulated by International Conventions, except for legitimate use by and for sale to drugstores by duly accredited importers. Unauthorised reprints of copyrighted scientific and literary works of art. Copper, bronze and nickel coins, except for account of the Government of the Netherlands Antilles. Obscene printed matter.

Immigration Law: All passengers disembarking in Bonaire as temporary visitors, for business purposes, on vacation, or in transit to other destination, must be in possession of:

(a) Valid passport/birth certificate.
(b) One passport photograph.
(c) Smallpox vaccination certificate, not over 3 years old.
(d) A return ticket, through ticket or passenger-order to next destination outside of the territory of the Netherlands Antilles.
(e) All documents and visas necessary for continuing to next destination or return to place of origin.
(f) Sufficient means to be able to support themselves during their stay in the territory.

No visa is required from a Netherlands Consul on any of the aforementioned documents.

AUTHORITY: Harbour Master, appointed by the Island Government of Bonaire.

ORANJESTAD, Aruba: 12.31 N. 70.02 W.

(See Plan Book)

DOCUMENTS:

Clearance from last port.
Deratisation Exemption Certificate.
Ship's Register.
Manifest of Cargo (or ballast), or Bills of Lading for import goods and transit goods separately.
Crew List (4 copies).
List of Stores on Board (2 copies).
Consignee Mail (if cargo for discharge).
Passenger List (if any passengers).

The passenger list must carry full names, ages, sex, nationality and occupation of passengers landing at Aruba. The ultimate destination of in-transit passengers must also be shown on the passenger list.

Deratisation Exemption Certificates can be renewed at Oranjestad, Barcadera and St. Nicholas.

Outward clearance, cargo documents and list of outgoing passengers are delivered on board by the Agent's representative, thereby making it unnecessary for Masters to visit the Customs Office to obtain outward clearance.

PILOTAGE: Masters are requested to advise Agents of their expected time of arrival at least 48 hours in advance. Arrival messages should include advice regarding cash or other requirements. This information is particularly necessary in order to give prompt attention to vessel's requirements and to avoid delay after arrival.

Pilots are government employees and pilotage is compulsory for vessels from 50 g.r.t. upward entering or leaving the harbour. Pilots board inbound vessels within 2 miles of shore. The Agent's representative will arrange for Pilots to board vessels as necessary. Inbound vessels should close the West entrance of the harbour as near as prudently possible and make a lee to facilitate the Pilot's boarding.

Every vessel arriving or departing must provide and properly secure a pilot ladder which conforms with the standards of construction normally accepted by international safety standards. Failure to provide such a ladder may result in the Pilot's refusal to board a vessel.

ANCHORAGE: Anchorages, suitable even for deepest draft vessels, are located outside the protecting reef along the whole length of the Western and S.W. coast. The depth of water ranges from 10 to 35 fathoms. Because of the sharply shelving nature of the bottom in this area, it is recommended that the services of a Pilot be obtained in taking up an anchorage. Ships are anchored only during daylight hours.

TUGS: A tugboat of 1,000 h.p. is available for assisting vessels to and from the docks. The tug-boat is fitted out with radio-telephone which is open on 2182 mc. while tug is in operation.

MINIMUM DRAFTS: For tankers arriving or sailing in ballast the following minimum drafts are required for manoeuvring under normal weather conditions:

G.R.T.	*Forward*	*Aft.*
16,600 (T-2)	8 ft.	18 ft.
18,000	8 ft.	18 ft.
27,000-30,000	10 ft.	20 ft.
30,000-36,000	14 ft.	22 ft.
37,000	14 ft.	24 ft.
46,000	16 ft.	26 ft.

MAX. SIZE: The harbour itself has a depth of 36 ft. at MLW. The safe salt water draft approved for entering and leaving is 33 ft. Vessels normally enter via the West channel and depart via the East channel.

HEALTH: The port doctor will visit an arriving ship only if there is a case of quarantinable disease on board, if the ship has no clean bill of health or if one of the preceding ports of call has been declared to harbour a quarantinable disease. The Netherland Antilles bill of health is free of charge.

RADIO: Shore station for R/T communication with 24-hour service. VHF Channel 16, 156.80 mHz (calling); Channel 11, 156.55 kHz (working channel).

HF 2182 kHz, 2558 kHz (working frequency transmitter), 2158 kHz (receiving frequency SSB).

BERTHING: In total there are 4,070 ft. of dock length available to accommodate ocean-going vessels and 1,090 ft. of dock for small craft, of which:

1,720 ft. with 36 ft. of water alongside
2,350 ,, ,, 34 ,, ,, ,,
460 ,, ,, 16 ,, ,, ,,
230 ,, ,, 10 ,, ,, ,,
400 ,, ,, 6 ,, ,, ,,

STEVEDORES: Stevedoring is performed at a fairly fast rate compared with other ports in the Caribbean area. All cargo has to be handled with ship's tackle, while on the docks and in the warehouses fork-lift trucks are used for transportation of merchandise. General cargo is handled at an average of 8 tons per gang per hour.

MEDICAL: Excellent medical and dental attention is available at any hour of the day or night to crew members of all vessels.

FRESH WATER: Boiler and drinking water of purest quality is supplied by hose from the docks at a rate of 200 t.p.h. (in special cases 400 t.p.h.).

FUEL: The port of Oranjestad is an official Esso bunker station. All grades of bunker fuels can be supplied from shore tanks at a rate of 1,500 barrels an hour. A minimum of 48 hours advance notice is required.

REPAIRS: There are no facilities at Aruba for major ship repairs. Local workshops can do repairs of minor nature. Preliminary advice regarding such minor repairs should be included in ETA messages and work requisitions for repairs should be prepared for handing to the Agent's representative immediately upon arrival.

Radar, radio and gyro repairs can be carried out. However, it is important that Masters radio in their requirements as early as possible and give a brief reference as to the nature of the breakdown or fault of the equipment concerned.

While alongside vessels must be prepared to move at 1 hour's notice. Engine repairs to the effect of demobilizing the vessel may only be carried out with special permission.

SURVEYORS: Representatives of the American Bureau of Shipping, the Lloyd's Register of Shipping and the Norske Veritas are resident in the area. Masters may request the surveyors' services through the Agent.

BALLAST: Vessels must arrive with sufficient ballast to permit safe handling. All vessels should enter port with clean ballast that can be pumped over board when alongside, as it is prohibited to pump dirty ballast into the harbour.

GANGWAY/DECK WATCHMEN: An efficient and continous watch must be maintained on deck and in the engine-room of all ships while in port, and a sufficient number of men must be on board at all times to move vessels either for harbour operations purposes or in emergency situations.

OPENING/CLOSING HATCHES: This work is normally carried out by the crew.

AIRPORT: The port of Oranjestad – the commercial and tourist harbour of Aruba – is only 5 miles by road from the jet airport. The connection by air with the U.S.A. and Europe are very good and rather frequent (TCA, KLM, VIASA); other airlines operating in Aruba are: ALM, LAV, Aerocondor, and Caribbair.

POLICE/AMBULANCE/FIRE: Police, Oranjestad, tel. 1000; Ambulance, Oranjestad, tel. 2010/1234; Fire Alarm, tel. 00.

CONSULS: The following countries have consular representatives at Aruba:

Brazil
Chile
Colombia
Costa Rica
Denmark
Dominican Republic
Great Britain
Guatemala
Haiti
Italy
Lebanon
Liberia
Nicaragua
Norway
Panama
Peru
Portugal
San Salvador
Spain
Sweden
Switzerland
Venezuela
West Germany

Necessary for Masters of Panamanian and Italian flag vessels to visit Consulates at Oranjestad to present documents and receive despatches. Other Consulates have similar requirements. Masters may check with Agent for clarification.

DEVELOPMENTS: Landing stage for roll-on/roll-off vessels with depth alongside 33 ft. under construction near Harbour Office.

TIME: Local time is 4 hours slow of GMT. Vessels are requested to use local time in ETA messages and when dealing with their Agents.

CUSTOMS GUARDS: Local authorities assign 1 or more Customs guards to each vessel during its stay in port; the charges for guarding are for the account of the vessel. These officials must be provided with meals on board at regular meal hours.

SHORE LEAVE: Under normal circumstances no restrictions are imposed by the Government Immigration Authorities on shore liberty. Masters are requested to endeavour to have all crew members on board prior to departure time, so that the ship will have no delay in sailing.

AUTHORITY: Eilandgebied Aruba, Haven en Loods Dienst.

PHILIPSBURG, St. Maarten: 18.05 N. 63.10 W.

Philipsburg, capital of Netherlands St. Maarten, lies in a well-protected bay in the S.E. corner of the island. The only obstruction to the harbour is "Proselyte Reef" or "Man-of-War-Shoals", located 17° 56′ N. 63° 04′ W., with a min. depth of 2.5 fathoms. Entrance to the harbour can be accomplished by passing either to the North or the East of this reef.

DOCUMENTS:

Crew List: Immigration 1 copy.
Agent 1 copy.
Passenger List: Immigration 1 copy.
Agent 1 copy.
Store List: None required.
Ship's Register: Pilot will require to see this document for obtaining the official tonnage.

Note: No special form is prescribed for the above documents, consequently these may be made out in Company's regular form. No consular visa required on any of the above documents.

Immigration: Immigration officer boards ship immediately after docking. Passengers and crew are usually free to disembark immediately after boarding.

Agency Personnel: Agency personnel boards immediately after vessel is docked together with Immigration Officer.

PILOTAGE: Pilotage is compulsory and performed by Government pilots. Ships bound for the pier at Philipsburg should await the Pilot at a max. distance of 1 mile from the line Point Blanche -Fort Amsterdam.

Pilot Ladder: Jacob's ladder, in clean and sound condition is sufficient.

Time to Berth: From pilot station to pier, about 15 to 30 minutes.

ANCHORAGE: Ample suitable anchorage area available with sufficient depths of water for several large ships simultaneously.

If and when the pier is already occupied by another cruise-ship, cruise-ships can proceed to anchorage, in which case communications between ship and shore to be by ships' own launches.

For ships proceeding to anchorage, pilotage is also compulsory.

RADIO: The Government radio and telegraph service operates daily from 0700 L.T. to 2400 L.T. worldwide.

Radio Telephone: VHF Channel 10 and 155.925 mHz.

ETA Messages: ETA messages should be sent to Agent preferably in local time at least 24 hrs. in advance and any changes occurring thereafter should be advised.

Use of Ship's radio in port: Prohibited.

TUGS: None available.

BERTHING: The new concrete pier at Philipsburg is located at Point Blanche in Great Bay and has a length of 210 m., with an additional 60 m. of berthing space, located at a 60° angle to the finger pier. Min. depth is 34 ft. of water. 4 fenders of steel spring and rubber are located along the berthing space.

Height from sea-level to the deck of the pier at high tide is 4.02 m., at low tide 4.48 m. Ship will lie with port side to the pier.

Mooring and Unmooring: 3 dolphins are located in an extended line of the berthing space for mooring. Min. required size of openings in shackles is 40×50 cm. Mooring boat is available.

Equipment: Cranes are available with a capacity of 20 tons max. Forklifts up to 8 tons and sufficient flat-bed trailers and low-buoys are also available.

STEVEDORES: There are 3 gangs available. Each gang has a total of 9 workers.

MEDICAL: Government physicians are available in Philipsburg and there is also a small, but up-to-date hospital operated by the Netherlands Antillean Government. A "Medical Service Request" form must be signed by the Master or other authorised officer for crew members requiring medical treatment.

Dental facilities available.

FRESH WATER: Available.

FUEL: No facilities for carrying out repairs except for radio and radar (Radio Holland).

SURVEYORS: There is a representative of Lloyds on the island.

AIRPORT: The island is served by A.L.M. (Dutch Antillean Airlines), Air France, Eastern Airlines, K.L.M. (Royal Dutch Airlines), L.I.A.T. (Leeward Island Air Transport), Prinair.

There are direct, almost daily flights, to and from New York and Miami connecting to other major places.

TIME: 4 hours slow of GMT.

HOLIDAYS: The following Official holidays are observed in St. Maarten: New Year's Day (January 1st); Good Friday (varies); Easter Monday (varies); Queen's Birthday (April 30th); Labour Day (May 1st); Ascension Day (varies); Whit Monday (varies); St. Maarten Day (November 11th); Kingdoms Day (December 15th); Christmas Day (December 25th); Boxing Day (December 26th).

TELEPHONE: Service from ship to shore is not available.

GENERAL:

Ship's Bars and Shops: No restrictions and these may remain open for business while in port.

Laundry: Available.

Wind: Prevailing winds on the island between the months of March and December are East to South, velocity 6 to 10 knots. Between December and March winds are generally North to East at a velocity of 8 to 15 knots.

Tide: The tidal range in Philipsburg is at most 2 ft., but regularly not more than 1 foot.

Current: The current outside Philipsburg harbour changes from Easterly to Westerly, with a max. velocity of 2 knots. At the Pier the current generally runs from North to South, with an average velocity of 0.5 knot.

Gangways: No gangways are available from the pier and ship's gangways will have to be used.

Ship's Launches: There are no restrictions on the use of ship's launches.

Stores: Available.

Garbage: No disposal facilities available.

Port Health: No regulations or requirements.

Customs: None.

AUTHORITY: Harbour Master.

AGENTS: S.E.L. Maduro & Sons (Windward Island) Inc., Emmaplein, PO Box 63, Philipsburg, St. Maarten N.A. Telegraphic Address: Maduroship Stmaarten. Tel 2202/2207.

SAN NICOLAS, Aruba: 12.26 N. 69.55 W.

(See Plan Book)

DOCUMENTS/HEALTH and all General Information, refer to "Oranjestad".

PILOTAGE: (Inner Harbour) Pilotage is compulsory. Pilot boards off West Entrance within 2 miles of the shore. Inbound vessels are expected to approach the entrance as near as prudently possible and make a lee to assist Pilot boarding.

A pilot service for anchoring off Lago Aruba terminal during the hours of darkness is now available upon the Master's request, providing radar and echo sounder are functioning properly.

RESTRICTIONS: The port is open for day and night navigation, allowing vessels to enter and leave at any hour. The East and West channels are 45 ft. deep. The safe salt water draft approved for entering and leaving is 41 ft. Vessels normally enter via the West channel and depart via the East channel.

RADIO: Radio-telephonic communication is possible on wavelength of 156.70 VHF (Channel 14). Calling and listening Channel 16. Call sign "Lagomarine".

TUGS: 2 diesel-powered tugs are used for berthing and unberthing.

MAX. SIZE: *Reef Berths:* Tankers up to 550,000 d.w.t. No. 2, depth alongside, 105 ft. MLW. Also see "Reefberth"

Inner Harbour: 100,000 d.w.t.

BERTHING: All port facilities are controlled by Lago Oil and Transport Company.

The max. limitations for vessels using San Nicolas facilities are:

Berths	*Length (ft.)*	*Beam (ft.)*	*Salt water max. draft (ft.)*	*Bow to manifold (ft.)*	*Approx. Deadweight*
1 South	745	UNL	39	376	50,000
1 North	740	110	39	356	50,000
2 South	800	110	40*	400	50,000
2 North	780	110	39	356	50,000
3 South	900	130	41	440	90,000
3 North	850	120	40	390	80,000
West Pier	650	UNL	32	350	25,000
HDS Pier	600	UNL	30	UNL	30,000

(dry cargo only)

Note: *2 South – 40 ft. mean draft with recommendation load with 1 foot trim by stern or 39 ft. 6 in. forward and 40 ft. 6 in. aft.

The max. entering draft is 41 ft. even keel salt water. The following is the suggested ballast draft for vessels.

MDWT	*Fore (ft.)*	*Aft (ft.)*
10–20	8	18
20–30	10	20
30–40	14	22
40–50	14	24
50–100	16	26

REEFBERTHS:

VLCC anchorage: When anchoring is necessary, Masters of VLCCs may wish to anchor in the following position; 12° 24′ N., 70° 07′ W., approx. 12 miles West of San Nicolas Harbour in approx. 25 fathoms.

Pilot Station: 2 to 3 miles West of San Nicolas Harbour entrance. When Pilot is boarding, the vessel should be on an Easterly course with a speed of not more than 2 knots.

Embarking Pilot, Loaded VLCCs: On the port side with either pilot hoist or conventional pilot ladder.

Ballast VLCCs: On the port side with a combination of accommodation ladder and conventional pilot ladder, or with only accommodation ladder.

Disembarking Pilot, Loaded VLCCs: On the starboard side with either pilot hoist or conventional pilot ladder.

Ballast VLCCs: On the starboard side with combination of accommodation ladder and conventional pilot ladder, or with only accommodation ladder.

Tugs: Normally 4 tugs used for tankers over 220,000 d.w.t. 2 on long lines, 1 forward and 1 aft and 2 alongside starboard side. Tugs lines used.

Docking: Always portside to, with starboard anchor ready, walked out to 1 shackle in the pipe.

Approach Velocity: RB and RB II are equipped with a doppler system. Contact between doppler operator and pilot is by VHF radio, Channel 12. RB I and RB II are equipped with "traffic lights"

Approach velocity 00–12 ft./min.=green.
12–20 ft./min.=amber.
above 20 ft./min.=red.

When the vessel is receding, the light is always green.

Mooring Launch: Used for all lines, except for the spring lines fore and aft. Forward moorings first, after moorings second.

Mooring Capstans: All mooring and breasting dolphins are equipped with capstans, 2 ton pull capacity, 100 ft./min. line hauling capacity.

Max. Size:

	MDWT	*Max. LOA (ft.)*	*Beam*	*Depth (ft.)*	*Max. draft (ft.)*	*Pier Heading*	*Approach angle*
RB I	40–400	1200	UNL	80	75	130° true	15°
RB II	40–550	1400	UNL	105	95*	114° true	10°

*With an approach angle of less than 10° draft up to 100 ft. can be permitted.

Sailing Draft Ballast VLCCs: abt. 25 ft. fore and 35 ft. aft.

Lines and Winches: Mooring lines assumed to be 1.625 in. dia. steel wire with a breaking strength of 90–100 tons.

Mooring winches assumed to have about 25 metric tons heave capacity and 55 metric tons brake holding capacity (minimum).

Combination of a wire and a synthetic line to a single dolphin will not be permitted.

Mooring lines must not be stressed beyond 55% of their breaking strength.

Self tensioning is not permitted. Automatic winches should be used on manual brake.

Synthetic tails on wires should have a higher breaking strength than the wire to which they are connected. The eyes of the tails should be protected from abrasion with suitable coverings, and tails should be connected to wires with suitably designed shackles.

A max. of only 2 layers of line to be allowed on working or tension drum of split drum winches.

Current and Wind: Current is less than 0.2 of a knot 90% of the time. Wind is less than 20 knots 70% of the time, and less than 25 knots 97% of the time.

Wind direction		*Current direction*	
True	*% of time*	*True*	*% of time*
20°– 40°	2	40°– 70°	24
50°– 60°	6	100°–110°	17
70°– 80°	33	140°–240°	10
90°–100°	40	260°–290°	24
110°–120°	13	320°–340°	25
140°–170°	1		
220°	5		

Wind tolerance: At 30 knots steady, loading will be discontinued, and the loading arms will be drained, engine to be confirmed ready for use.

At 35 knots steady, arms will be disconnected and tugs will be called out

Loading Arms: RB I; four 16 in. cargo arms with 16 in. bolted flange connections. One 8 in. bunker arm (No. 5 arm, the most Westerly arm). RB II; five 16 in. cargo arms with 16 in. connections.

Discharge/Loading Lines: RB I 36 in., 3,000 ft. long. RB II 56 in., 4,000 ft. long.

Radio Contact: Contact between Loading Master, control room, marine office by VHF and UHF. Particulars will be given by loading Master.

Bunkers: RBI; through bunker arm (No. 5). RB II; through No. 1 or No. 5 loading arms with reducers.

Water: Available on RB I and RB II only in an emergency.

Provisions: By launch; to be taken on board by ship's lifting gear on the port quarter.

Shore Leave: No pedestrian traffic allowed between ship and main gate. Arrangements for crew transportation can be made with Agent, or by calling the Marine Office.

FRESH WATER: Fresh water can be supplied ex-wharf.

FUEL: All grades of bunkers available.

Sea Berth: Vessels arriving for bunkers only with a draft greater than 41 ft. must use the Reef Berths. As the berth is used for crude oil trans-shipment bunkering vessels can expect delays. Also the following considerations apply:

1. Vessels working cargo have priority over vessels bunkering.
2. In assigning tugs, vessels working cargo take priority. (3 to 4 hours tug service required at the sea berth.)
3. Mooring launches require 48 and 24 hours notice.
4. Vessels using the Reef Berths must have 12 good mooring lines. All mooring winches and equipment will be inspected and must be in good order. Vessels may not be docked if equipment is faulty.
5. In the event of marginal weather, deep draft vessels calling for bunkers may not be docked.

REPAIRS: A local workshop can do minor repairs.

PORT FIRE PROTECTION: The port of San Nicolas is very well equipped with modern equipments for fire-fighting and fire prevention.

BALLAST: Tankers must arrive with a maximum of 20% dirty ballast to pump ashore. Shore reception facilities are limited. 80% clean ballast to go overside after inspection. Ship's arriving with more than 8% of their d.w.t. dirty ballast will be put to anchor to clean ballast, delay for owner's account. Clean ballast will be discharged overboard after docking. Slops can be discharged to the disposal facilities ashore but "sour" slops can only be received at Reef Berths.

SPECIAL REGULATIONS: Strict compliance with Harbour Safety Regulations is mandatory. Stringent regulations prohibit the transportation of alcoholic beverages through Lago refinery and harbour area. No liquor or beer may be taken on board or removed from vessels except only bonded stores ordered by the Master.

SHORE LEAVE: As all ship's personnel when going ashore have to walk over the docks and the company's concession, nobody is allowed to leave the docks without a proper pass. Passes which are valid for the day of issue and the following day only, entitle personnel to proceed from the dock at which their ship is berthed to the main refinery gate and vice versa. Shore passes are not valid for the refinery area.

POLICE/AMBULANCE/FIRE: Police, 5000; Ambulance, 5050; Fire, 00.

AUTHORITY: Lago Oil and Transport Co.

SINT MICHIELSBAY, Curacao: 12.09 N., 69.01 W.

Sint Michielsbay, on the South coast of Curacao, 5 miles N.W. of Willemstad, is an open bay, naturally protected from prevailing winds and sea.

PILOTAGE: Compulsory.

ANCHORAGE: In the bay 650 ft. out of the coast in 130 ft. water is laid a mooring buoy, which gives a good anchorage to vessels which, because of dangerous cargo, quarantine or because of a defect cannot enter another port of Curacao.

BERTHING: Vessels moored with their stern to the buoy and their bow anchors are heaved out to hold the foreship from the coast.

REPAIRS: Repairs or handling cargo can be carried out by way of barges. A landing jetty for barges is available.

GENERAL: Other services as tugboats, lighterage, stevedoring, etc. are rendered from Willemstad.

AUTHORITY: Harbour Master, Curacao.

WILLEMSTAD/EMMASTAD, Curacao: 12.06 N. 68.56 W. (See Plan Book)

DOCUMENTS:

For Immigration:

2 copies of Crew List.
2 copies of List of Passengers Landing at Curacao (if any).
2 copies of List of Passengers in Transit (if any).

For Customs:

1 copy List of Stores (deck, engine and steward department).
Manifest of Cargo for Curacao, if any, in duplicate, on special form called "Vrachtlist".
Manifest of Cargo for Curacao, in transit, for trans-shipment to other ports, if any, in duplicate.
Manifest of Cargo on Board, in transit, if any, in duplicate.
2 copies of Tally Books of Cargo for discharge at Curacao, if any.

If the ship is in ballast only the store-list is required.

1 copy Crew List.
1 copy Passenger List landing at Curacao.

PILOTAGE: Pilotage is compulsory. Rendered day and night. Pilots are government officials and are stationed at Willemstad. The Harbour Master is also the head of the Pilot Service.

Vessels should stay 1 mile off-shore S.W. of the harbour entrance and await Pilot. The Pilots motor boat does not carry any distinct signals. (No blue flag and no red and white lights.)

ANCHORAGE: As a rule there is no anchorage area in the harbour of Willemstad, but in the Eastern part of the Schottegat there is a dolphin with mooring buoy on each side available to await berth or orders for limited time subject to permission and conditions from the Harbour Master.

4 vessels, 2 vessels alongside each other can be safely moored at these buoys. Depth: 40 ft.; distance between each buoy and dolphin 1,000 ft. Furthermore, in the Southern part of the harbour a set of 2 dolphins can accommodate 2 vessels with length up to 600 ft. and a max. draft of 20 ft.

RESTRICTIONS: The harbour of Willemstad consists of a 1,400 yd. long and min. 270 ft. broad channel, the Santa Anna Bay, with depths from 50 ft. to 79 ft. and an adjacent inner bay, the Schottegat, a 150-acre body of water with a depth of more than 10 ft. and a max. of 79 ft.

The navigable portion of the entrance of the port is 865 ft. wide, marked on either side by a light-buoy, and the min. depth is 50 ft.

Required minimum draft for tankers arriving, shifting and sailing:

g.r.t.	fwd. ft.	aft. ft.
up to 11,000	10	16
11,000–15,000	11	18
15,000–19,000	13	19
19,000–25,000	14	20
25,000–29,000	15	21
29,000–35,000	17	23
35,000–43,000	18	24
43,000–45,000	19	25
45,000–47,000	20	25
47,000–50,000	21	26
50,000–55,000	22	28
55,000–60,000	22	29
60,000–65,000	23	30
65,000–70,000	23	31
more than70,000	24	32

Maximum trim for tankers: 10 ft. by the stern, 2 ft. by the head.

BRIDGES: Santa Anna Bay is crossed by 2 bridges, the Queen Emma floating pontoon bridge and the new, fixed bridge.

The pontoon bridge opens day and night for in and outgoing vessels. There will no longer be any waiting period at the harbour entrance. Automobile traffic will be diverted to the new bridge and those on foot will have continuous ferry service available. Ships will have overall preference for openings.

The new fixed bridge, dominating Willemstad's skyline and the entrance to Schottegat Bay, is 185 ft. high, (clearance 180 ft.) enabling the biggest vessels to pass under. The bridge is of box girder construction and is open to automobile traffic only. Glare-proof lights are installed to prevent interference with light signals that harbour pilots rely on when bringing a ship through the channels.

Tankers passing through the Santa Anna Bay must have all tank-lids properly closed, even if they are gas free. This is a harbour regulation.

MAX. SIZE: Length 1,000 ft., draft 45 ft.

RADIO: Port Operations Station (Operated by Harbour Authorities): Location, Fort Nassau. Call sign, Fort Nassau. Frequencies, International Channels 16 (156.80 Mc/s.), calling and safety; 12 (156.60 Mc/s.), working, first choice; 14 (156.70 Mc/s.). Watchkeeping, 24 hours on Channel 16. Type of operation, Simplex, Frequency modulated. Range, 20 to 25 miles.

Main Private Station (Operated by Shell Curacao N.V.): Location, on the Zwartberg. Call sign, Shell Curacao. Frequency, international Channel 25 (receiving, 157.25 Mc/s.); (transmitting, 161.85 Mc/s.). Type of operation, Duplex working, frequency modulated; operated by remote control from Shell's telephone exchange; ask operator for connection with party desired. Range, 20 miles. Watch-keeping, 24 hours on Channel 25; normal daily business, 0730 hrs. till 2400 hrs.; urgent business only, 2400 hrs. till 0730 hrs.

Tug Base Station: Location, on the Zwartberg. Call sign, Marine Department – for tug movements only and in an emergency to direct the tugs. Watchkeeping during office hours. Central Post – for tug movements only. Watchkeeping 24 hours. Shell Curacao – for emergency calls to tugs only after having been alerted on Channel 25. No watchkeeping. Frequency, International Channel 14 (156.70 Mc/s.). Operation, Simplex – frequency modulated. Operation by remote control from Shell's Marine Department, Central Post and telephone exchange.

Tug Mobile Stations: Location, 1 on each tug. Call sign, Balau, Drado, Lima and Jaro. Frequency, International Channels 16, 12, 14, 9, 8 and 6. Watchkeeping, 24 hours on Channel 14. Operation, Simplex – frequency modulated.

Curacao Drydock Co. – VHF Channel 6. SEL Maduro and Sons Inc. – VHF Channel 10.

HEALTH: The port doctor will visit only if there is a case of quarantinable disease on board. The Netherlands Antilles Bill of Health is free of charge.

TUGS: Compulsory for all tankers exceeding 3,000 g.r.t. Tankers exceeding 700 ft. overall length must make one tug fast forward before entering.

L. Smit & Co. International Tug Service has a permanent ocean towage and salvage base in the port of Willemstad. There is always a powerful salvage tug at the station which has been especially equipped to deal with casualities and a harbour tug of 2,500 h.p. with 35 tons bollard pull. Shell Curacao has stationed here three harbour tugs, all 2,250 h.p. with 30 and 34 tons bollard pull.

BERTHING: There are berths on either side of the Santa Anna Bay North of the pontoon bridge, with depths varying from 18 to 33 ft. alongside, generally used for bunker, cargo and passenger ships.

On the Eastern side four wharves: the Handelskade, depth 18 ft.; the Kleinewharf, depth 24 ft.; Grotewharf, depth 31 ft.; and Salazar, depth 24 ft.

On the Western side six wharves: the Matheywerf, depth 23 ft.; Westwerf S., 25 ft.; Westwerf N., 36 ft.; Nieuwewerf, 33 ft.; Motetwerf, 33 ft.; Oranjewerf, 19 ft.

In the Schottegat there are seven more berths, generally used for bunker, cargo or passenger ships.

Prins Hendrikwerf which closes the Western corner Santa Anna Bay/Schottegat, has a depth of 35 ft.; however, ships with a draft of more than 35 ft. can be moored by way of placing rafts of 10 ft. width between vessel and the quay.

At the Eastern part of the Schottegat are the Admiral Brion Wharves, which has 3,000 ft. docking space available with 34 ft. depth alongside.

In the Schottegat on the peninsula of Asiento are situated the 14 piers owned by Shell Curacao Ltd., which are mostly used by tankers; however, other vessels are enabled to use these wharves for bunker facilities. Pier No. 1 may be used for general cargo.

The names and the depths alongside these piers from West to East are: Pier I, 27 ft.; Piers II and III, 33 ft.; Pier IV, 40 ft.; Pier V, 45 ft.; Pier VI, 39 ft.; Pier VII, 33 ft.; Pier VIII, 45 ft.; Margrietpier (two berths), 34 ft.; Pier IX, 33.5 ft.; Pier X, 32 ft.; Pier XI, 18 ft.

The Schottegat also has about 5,000 ft. of quay available for repairs. The names of the wharves, lengths and depths alongside are: Beatrix I and II, 1,300 ft. – 21 ft.; Beatrix III, 400 ft. fore 10 ft., aft 35 ft.; Beatrix IV, 350 ft. – 31 ft.; Beatrix V and VI, 1,000 ft. – 32 ft.; Repair Quay, 1640 ft. – 35 ft.

Storage capacity for liquid petroleum products is 4,600,000 tons in tanks of Shell Curacao Ltd.

Docking of cruise ships in Willemstad harbour: The following piers are regularly used by cruise ships and cargo ships:

Nieuwewerf, Motetwerf: West side St. Anna Bay. Type: quay. Construction: sheet piling, concrete top, stelcon plates floor. Length: 1,200 ft. Draft: 33 ft. Height above water: 4 ft. One transit shed each: Nieuwewerf, width 65 ft., length 216 ft., area 14,000 sq. ft. Motetwerf, width 65 ft., length 216 ft., area 14,000 sq. ft. Open space area 200,000 sq. ft. One warehouse facility 6,500 sq. ft.

Oranjewerf: On West corner St. Anna Bay/Schottegat. Type: quay. Construction: iron piles, concrete top,concrete floor. Length: 418 ft. Draft: 19 ft. Height above water: 6 ft. Special bunker pier, cargo handling mostly via lighters alongside.

Admiral Brion Wharves: Nos. 1, 2, 3, 4, 5 and 6 situated at the East side Schottegat. Type: quay. Construction: sheet iron cells with concrete top, asphalt floor. Total length: 3×1,000 ft. Depth: 34 ft. Height above water: 5 ft. One transit shed: width 65 ft., length 330 ft., area 21,000 sq.ft. Open space area 510,000 sq.ft. A special platform for Ro/Ro ships has been constructed. Maximum draft: 33 ft.

Kleinewerf, Grotewerf, Salazarwerf: East side of St. Anna Bay. Type: quay. Construction: sheet piling, concrete top, asphalt floor. Total length wharf: 1,470 ft. Maximum draft alongside 24–31 ft. Height above water: 2 ft. One transit shed, width 65 ft., length 330 ft., area 21,500 sq. ft. Open space area 154,000 sq. ft.

SLOP RECEPTION FACILITIES: Available at all Shell Terminals.

FRESH WATER: Fresh water for drinking purposes and use in boilers is available day and night in sufficient quantities at all wharves. Fresh water is also delivered alongside by means of water barges, delivery rate 50/100 t.p.h.

FUEL: Besides the Shell piers there are two bunkering installations: namely, the "Admiral Brion Wharves" comprised of six berths and the "Motet" bunkering installation comprised of four berths.

The "Admiral Brion Wharves" bunkering installation is directly supplied from the refinery by means of two pipe-lines with diameters of 12 and 8 in. The pipe-lines run the full length of the piers, each with five bunkerpits, from which the oil can be delivered directly to the ships via a mobile blending unit if this is required. The capacity of the pipe-line and the pumps is 600 t.p.h. for fuel oil and 300 t.p.h. for diesel oil. Gas oil is also available.

The bunkering facilities of the "Motet" installations in Otrabanda, which are comprised of seven storage tanks and pumping facilities, are supplied through two pipe-lines of 12 and 6 in. diameter from the refinery. The rate of delivery, by gravity and pumps, is 600 t.p.h. for fuel oil and 500 t.p.h for diesel oil.

Modern fuel blending facilities are available at all installations in Willemstad.

REPAIRS: The Curacao Drydock Company Inc. has repair yards, two graving docks and one floating dock laid out in the Schottegat.

The largest graving dock is 919 ft. long, width of entrance between wheel fenders 152 ft. and a depth of water over sill of 27 ft. 10 in. Suitable for up to 120,000 d.w.t. Movable cranes of 25 and 75 tons lifting capacity are fitted alongside the dock.

The Curacao Drydock Company Inc. has 6,000 ft. of repair wharf with varying depths up to 40 ft. Cranes alongside up to 75 tons lifting capacity. A floating crane with capacity of 30 tons and a mobile truck crane of 140 tons also available.

Electric shore-power A.C., D.C. 110, 220 or 440 volts can be supplied directly from shore at wharves of Shell Curacao Ltd. and at other wharves from generators on barges. Shell can also supply steam directly from the shore at a pressure of 8–15 kg/cm.

STEVEDORES: Gangs must be engaged between 0600 and 0630 hrs. for the day, on weekdays and Saturdays. For work on Sundays and holidays, gangs must be ordered between 0600 and 0630 hrs.

on Saturday or the workday preceding the holiday. Masters of vessels carrying out cargo operations are consequently recommended to advise Agents their ETA well in advance of above deadlines.

TIME: Curacao time 4 hours slow of GMT.

HOLIDAYS: New Year's Day, Carnival Monday (February), Good Friday, Easter Monday, Queen's Birthday, Labour Day, Ascension Day, Kingdom Day, Christmas Day, Second Christmas Day. "No work", holidays for cargo operations: New Year's Day, Good Friday, Labour Day and Christmas Day.

GENERAL: Customs Officers remain on board on duty during the vessel's stay in port. They must be fed by the ship and are entitled to the equivalent of officers mess or first-class dining saloon.

REGULATIONS: Both anchors should be ready for immediate use. Defects of engines, steering gear, anchor gear and other defects which influence manoeuvring abilities of the vessel should be reported before entering, to the Harbour Master. Vessels carrying explosives must obtain a permit from the Harbour Master before entering.

AIRPORT: There are daily international flights from Dr. Albert Plesman Airport.

ALM: Frequent daily trips to Aruba and Bonaire. Daily flights to Miami and New York. Regular air services to St. Maarten, Caracas, Maracaibo, Colombia, Haiti, Sto. Domingo, Puerto Rico, Trinidad and Paramaribo.

Eastern Airlines: Daily flights to Puerto Rico and transfers to all points.

American Airlines: Daily flights to New York and transfers to all points.

VIASA: Regular scheduled flights to Caracas, Sto. Domingo, Paris and Amsterdam.

Aerocondor: Daily flights to Colombia.

LAV: Many daily flights to Caracas.

KLM: Daily flights to Amsterdam, Lisbon, Madrid, Frankfurt and Zurich.

Ferry: Ferry's Del Caribe S.A. runs a regular service with a new modern ferry which carries 1,200 people and 120 automobiles. This ferry has regular service between Curacao and Coro, Venezuela on Monday, Tuesday, Wednesday and Thursday. On Thursday the ferry also goes to Aruba and Punto Fijo, Venezuela.

DEVELOPMENTS: There is a Container Terminal under construction South of Admiral Brion Wharves. Length of quay 480 m. Total area 90,000 sq.m. Terminal is due to come into operation in late 1980.

AUTHORITY: The Harbour Master. (Who is also General Manager of the Harbour and Pilot Service.)

AGENT: SEL Maduro & Sons (Curacao) Inc., Maduro Plaza, POB 304, Willemstad, Curacao, Netherlands Antilles. Tel. 76900. Telex: 1092 Selms NA. Cables: "Maduroship".

NOTES

Please also advise Shipping Guides Ltd.

New Caledonia

NOUMEA: 22.16 S. 166.27 E. (See Plan Book)

DOCUMENTS:
Ship's Register.
Safety Certificates.
Cargo Manifests.
List of Dangerous Cargo.
Passenger List.
Crew List.
Crew Personal Effects List.
Bonded Stores List.

PILOTAGE: Compulsory for vessels over 60 m. LOA. ETA to Port Captain and Pilots required 24 hours in advance. The two access channels to Noumea are Boulari channel (Amadee light) and Havannah channel. Pilot boats are wooden launches about 15 m. long equipped with VHF. Harbour Master's office and pilot station on Channel 16 during office hours.

Boulari Channel: Pilot boards 1 mile off, on the alignment of the Amadee high and low lights.

Havannah Channel: Pilot boards off Goro light on the alignment of the leading lights on Cap N'Dua.

In bad weather, pilot launches will remain on these leading lines, but as close as possible to the channel entrances.

Pilot should be ordered at least 6 office hours before departure or moving.

ANCHORAGES: Available in the outer and inner roads of Noumea, as indicated by the Pilot. Prohibited zones are marked on the chart.

RESTRICTIONS: Vessels may enter and anchor at any time, mooring may be effected at night.

MAX. SIZE: Tanker buoy berths designed for 20,000 d.w.t., and SBM for tankers of 100,000 d.w.t. Draft limited to 14.80 m. by a bar between the reef and the port.

HEALTH: Unless vessels have signalled that there is suspected disease or fever on board, free pratique is given automatically by radio request to the Capitaine du Port or by the Pilot.

RADIO: All messages by coast station Noumea, call sign FJP. Harbour Master's office equipped with VHF, Channels 16, 12 and 14, operated during normal working hours.

TUGS: Tug's service is compulsory. One tug of 1,200 h.p. and 1 of 500 h.p. available to assist.

BERTHING: At old Port Authority quay, draft limited to 7.50 m. New quay of 700 m. to accept vessels up to 10 m. draft and over 200 m. length. Private berths of Nickel Company are dredged to accommodate 10 m. draft.

STEVEDORES: Service provided by four private companies. 2 or 3 days' notice required to arrange work.

MEDICAL: Doctors, hospital, and 3 private clinics available. Smallpox vaccinations are compulsory.

TANKERS: Buoy berth, max. draft 48 ft. 6 in. Shell berth (at Nickel Company), max. draft 10 m. at HW.

DENSITY: 1026.

FRESH WATER: Supplied by pipe-line at the quays; rate, 40 t.p.h.

FUEL: Several grades available from Shell, Mobil and Total.

GANGWAY/DECK WATCHMEN: Recommended, but not compulsory.

OPENING/CLOSING HATCHES: Can be performed by stevedores if required.

CUSTOMS ALLOWANCES: 200 cigarettes per man. Additional allowance can be made after 10 days. Max. 3 bottles spirits per man. Wines and beer not limited.

IDENTIFICATION CARDS: Recommended that crew carry Seamen's Books.

CONSULS: Australia, Belgium, Indonesia, Italy, Japan, Norway and New Zealand are represented locally.

REPAIRS: Many engine, hull and electronic repairs can be effected. Slipway for small vessels.

REPATRIATION: All facilities available for crew change and repatriation.

AIRPORT: Tantouta Airport situated 50 km. from Noumea. Several connections a week to all parts of the world.

TIME: GMT plus 11 hours. No alterations during the year.

HOLIDAYS: 1st January, Easter Monday, 1st May, Ascension Day, Whit Monday, 14th July, 15th August, 1st November, 11th November, 25th December. Work may be arranged on Sundays and holidays.

POLICE/AMBULANCE/FIRE: Police, Tel. 17; Fire, Tel. 18; Ambulance, Tel. 721.21.

SHORE LEAVE: Allowed.

SHIPMASTER'S REPORT:
Communications: Radio W/T. Short wave service and MF service very good. First message to state which passage used – Draft – Tonnage – and nature of dangerous cargo, this should be sent at least 24 hours before arrival, Agent and Harbour Master required this message.

Radio Telephone. Service available.

VHF. Available to Harbour Office and Pilot Station during office hours 0715 to 1115 hrs. and 1330 to 1730 hrs. Monday to Friday 0800 to 1100 hrs. on Saturdays. Pilot vessel when at Havannah Passage keeps VHF watch one hour before the last given ETA. In our case we made contact with the pilot vessel when 12 miles from Havannah Passage. If at anchor VHF contact to Agents can be made via Harbour Office.

Pilotage: Boarding ground. Canal de Havannah. The Pilot boards the vessel when on the leads, but inside the reef, when the vessel is off Port Goro. The three leading lights stand out well at night time, each light is individually powered in case of failure, in our case they were seen 25 miles away. During strong S.W'ly winds the Pilot will board in the lee of Loro Reef. As the leads do not stand out so well in day time, night time seems to be the best arrival time. This channel has been swept to a depth of 34 ft. Strong cross currents can be expected at the entrance to Havannah Passage.

Anchorages. See CHINPACS for area dangerous due to mines. Otherwise vessel anchors Grande Rade.

Quarantine. Pratique granted by Pilot, Health Signal not required unless notifiable sickness on board.

Controlling Factors: Berthing times. Vessels are now berthed at any time, the usual side to being Starboard side, a 1,200 h.p. tug being used to assist.

Depth of Water. The least sounding taken at No 1 Berth was 32 ft., the other two berths are said to have 33 ft. of water at them.

Length. No limit at berth.

Berthage. 700 m. at the New Wharves.

Stevedoring. Working time. 0700 to 1100 hrs. then 1300 to 1700 hrs. and overtime from 1800 to 2200 hrs. The labour will also clean out the hatches provided one gang is actually working cargo, otherwise they stop when cargo work is all finished. Saturday is not an overtime day. Only Sunday is an overtime day. Good Friday and Easter Saturday are considered normal working days. The Stevedoring is good, with a fast working rate, but I regret to state that some pillage took place. As regards unprotected cars, the most minor marks were claimed against the vessel, these were repudiated.

Documents:
1 Cargo Manifest.
1 List of Dangerous Cargo.
2 Crew Lists.
1 Crew Personal Effects List, this list to include currency held, (French Forms accepted).
1 Bonded Stores List.
1 Health Form.

AUTHORITY: Port Autonome de Noumea.

New Zealand

GENERAL: All ports.

The New Zealand Ministry of Agriculture and Fisheries requires a Shipmaster's Bond and Guarantee (Form Ag.L35) to be completed in triplicate if vessel is carrying animals, i.e. cats, dogs, fish, birds, etc.

In addition all overseas vessels are required to complete in duplicate a Meat Locker Declaration (Form Ag.L36).

All foods of an agricultural nature are held by Customs Department until they have been inspected and a Permit to Land (Form Ag.G.78) issued by the Ministry of Agriculture and Fisheries.

Crews signing off are required to check with the Port Agriculture Officer and obtain Release/Treatment of any agriculture items which they wish to take ashore.

AUCKLAND: 36.51 S. 174.45 E. (See Plan Book)

PORT LIMITS: South of a line drawn due West from Rangitoto beacon.

DOCUMENTS:

3 Copies Passenger List.
3 Copies Crew List.
1 Copy Search List (Form 2).
1 Copy Stores List (Form 3).
1 Copy Prohibited and Restricted Immigrants.
1 Copy Poisons List.
1 Copy Animals and Birds List.
1 Copy List of Firearms (not cargo).
1 Copy Arrival Manifest (Form 1), plus 2 for other ports visited (Reg. Form 16 refers).
1 Copy of List showing the gross tonnage of cargo for discharge in New Zealand.
3 Copies Shipmaster's Bond and Guarantee (Form Ag.L35).
2 Copies Meat Locker Declaration (Form Ag.L36).

PILOTAGE: Vessel approaching port to give 24 hours notice by radio. A second notice confirming or amending first to be sent 4 hours before expected time. Signal Station on Mt. Victoria, call sign "Auckland Harbour Radio", calling frequency 2182 kHz, working frequency 2012 kHz. VHF, call sign "Auckland Harbour Radio", Channel 12 and 16. Continuous listening watch on Channel 16.

Pilot launch is 64 ft. long, single mast, painted white. Name is *Akarana*. Standard flag and lights are shown. Word "Pilot" painted in black on white above cabin. Pilots board 1 mile North of Rangitoto Beacon, but will proceed farther when necessity arises. Good pilot ladder with manrope required to within 5 ft. of water-line with proper lighting at night. Heaving lines will be needed for mail.

ANCHORAGE: For vessels waiting Pilot: Gulf Anchorage No. 1 bearing 000° distance 2 miles; No. 2 bearing 006° distance 2.5 miles; No. 3 bearing 012° distance 3 miles. Bearings and distances from Rangitoto Beacon.

All inner anchorages in pilotage area can be indicated by Pilot. All anchorages are in 11 to 18 fathoms with good holding ground.

RESTRICTIONS: Ships may enter harbour at any time of day or night. Main channel has least depth of 11 m. chart datum. Vessels with greater draft must wait for tide to make and enter at Harbour Master's orders. Tankers not berthing immediately on arrival anchor as directed at one of Gulf Anchorages.

MAX. SIZE: No limits, within reason, on the length or breadth. Controlling depth at chart datum: entrance 11 m.; Rangitoto Channel 11 m.: anchorages 9.8 to 18.29 m.; berths 6.09 to 12.20 m.

HEALTH: 12–24 hours before arrival time, despatch message to Port Health, Auckland. Message to state ETA, last port, and date of departure therefrom, number of crew, number of passengers and state of health and indicate if there is a doctor amongst the crew. 12 hours before arrival confirm ETA.

Doctor boards by way of vessel's shipside gangway (not pilot ladder) when in harbour. This gangway to be ready immediately on arrival in order to avoid any delay. A responsible person should meet doctor at head of gangway and conduct him to appropriate person.

Papers required:
Completed Maritime Declaration of Health.
De-rating Certificate.
Complete Crew List with dates of last smallpox vaccination.
N.B. Crew and Passenger Lists to be certified as being correct by the Master.
List of Addresses of Disembarking Passengers.
List of Dangerous Cargo on board.

Pratique is granted initially, and covers all subsequent coastal movements in New Zealand for that voyage. Radio pratique can be granted only after prior approval from New Zealand Health Department.

Vessels requesting pratique should exhibit appropriate International Code Signals by day and night until pratique is granted.

RADIO: Station for routing traffic to the Auckland area is Auckland Radio. Call sign ZLD. Working both W/T and R/T on continuous watches.

VHF: See "Pilotage".

RADAR: Radar station with range of 72 km. located on Mt. Victoria 36° 49′ 42″ S., 174° 47′ 57″ E. Masters may call on radio telephone and request particulars of their bearing and range as shown on radar screen. Responsibility for the use of this information rests entirely with Master of vessel.

TUGS: 4 tugs available. Tugs join vessel East of Eastern Tide Wall. Tugs supply lines at no extra charge.

BERTHING: Tankers berthing at Eastern Tide Wall, BP Depot, must berth in accordance with weather and tidal conditions. Tankers must arrive at Pilot station not later than half an hour before sunset, otherwise berthing will be postponed until following morning.

Depth of water: Bledisloe 10 m.; Captain Cook 8–10.5 m.; Eastern Tide Wall 10–10.5 m.; Hobson 4–6 m.; Jellicoe 9–11 m.; Kings 8.5–9.5 m.; Marsden 2.8–8 m.; Princes 9–11 m.; Queens 9–10.5 m.; Wynyard 8–11 m.; Freyberg 10–11 m.; Fergusson 11–12.2 m.

CRANES: At Fergusson Container Terminal there is 1 twin lift container crane of 45.72 tonnes capacity and 1 single lift container crane of 40.64 tonnes capacity. In the conventional cargo port quay-side cranes of 3 or 5 tonne capacity are provided at all except 2 berths. At the bulk fertiliser berth there are six 5 tonne capacity multi-wire grabbing cranes and at the bulk sugar berth there is a 5 tonne capacity gantry grabbing crane. Self propelled floating crane 101.6 tonnes capacity.

BULK CARGO FACILITIES: *Cement:* A special berth is provided where bulk cement is discharged pneumatically via pipe-line to privately owned silos. Depth at chart datum 6.0 m., quay length 94 m.

Sugar: Bulk sugar is discharged at Chelsea Wharf. This wharf is equipped with a 5 tonne capacity gantry grabbing crane and a conveyor system connected to the refinery store. Depth at chart datum 9.9 m. Quay length 91 m.

1 berth is set aside for the discharge of bulk fertiliser bases. Six 5 tonne capacity multi-wire grabbing cranes and 6 rail mounted hoppers of 10.7 cu.m. capacity are available. Depth at chart datum 11.0 m. Quay length 335 m.

4 other berths can also be made available for discharge of dry bulk cargo as required.

SPECIALISED CARGO HANDLING FACILITIES:

Tanker Terminals: 2 berths are at a continuous quay 486 m. long, depth at chart datum 9–11.0 m. The third is a dolphin berth, depth at chart datum 10.5 m. All the berths are connected by pipe-line to adjacent tank farms.

Container and Ro/Ro Facilities: Fergusson Wharf Container Terminal: Quay length 457 m. Depth at chart datum 12.2 m. The terminal is equipped with 2 Vickers Hoskins/Paceco gantry container cranes, a single lift of 40.64 tonnes capacity and a twin lift of 45.72 tonnes capacity. Total back-up area of the terminal is 15.46 ha. of which 11.16 ha. is used for container handling and storage and 4.30 ha. is used for container repairs and LCL containers. Included in the latter area is the Monash Street Container Base which provides 7,432 sq.m. of covered transit storage for LCL cargo. Rail exchange sidings are located immediately adjacent to the terminal. There are power outlets for 872 refrigerated containers. Container terminal equipment includes 15 straddle carriers (plus 2 on order), seven 20–25 tonne capacity fork lift trucks with top lift attachments as well as various tractors, trailers and smaller fork lift trucks. The terminal is operated by the Auckland Harbour Board.

Bledisloe Roll-on Terminal: Quay length No. 1 berth 137 m., No. 2 berth 224 m. Depth at chart datum 9.5 m. Each berth is equipped with a link span with a fork lift axle load capacity of 56.9 tonnes and a low loader capacity of 182.9 tonnes. No. 2 berth can accept ships equipped with a port quarter ramp. A total back-up area of 4.8 ha. is provided including a cargo shelter of 4,000 sq.m. and rail exchange sidings. The terminal is operated by Union Steam Ship Company.

BRIDGES: Navigation in daylight hours only under Auckland Harbour Bridge. Navigation span is 138 ft. to 131 ft. above MHWS for 250 ft. each side of centre. Only ships berthing at Chelsea Wharf sugar berth need pass under the bridge.

STEVEDORES: Labour commences at 0730 hrs. In order to ensure labour for this time ETA should be received at Agent's office before 1500 hrs. previous day, or before 1500 hrs. previous Friday for a Monday start. Delays on radio messages may be up to 3 hours.

MEDICAL: In case of urgent medical attention being required, Agents can arrange for doctor to board in stream at any notice. Hospital and ambulance services available 24 hours. If any smallpox vaccinations have expired this must be included in ETA advice.

TANKERS: See "Special Cargo Handling Facilities".

Any size pipe-lines can be used, oil companies have all reducing pieces needed.

No facilities for slop discharge.

DENSITY: Always 1025.

FRESH WATER: Fresh water always available. Delivery rate 100 t.p.h., through canvas hoses. AHB supplies all equipment.

FUEL: Light fuel oil, diesel, gas oil and heavy fuel are available. To be ordered in ETA notice.

FIRE PRECAUTIONS: In addition to usual precautions, Class I tankers are under extra security with a nightwatchman from Harbour Master's staff in addition to the normal tanker guard.

CONSULS: (Consuls, Trade Commissioners, etc.): Australia, Belgium, Brazil, Britain, Costa Rica, Denmark, El Salvador, Fiji, Finland, France, Germany (West), Greece, Ireland, Italy, Japan, Korea (South), Nauru, Netherlands, Norway, Peru, Philippines, Portugal, Sweden, Switzerland, Tonga, Turkey, U.S.A., Venezuela, Western Samoa.

REPAIRS: Any ship repairs can be carried out. A slipway can take vessels of 600 tons displacement and up to 64 m. LOA.

DRY DOCKS: Max. size of vessel that can be accommodated in Calliope dry dock is 181.35 m. LOA and 19.6 m. beam. Water on sill at MHWS 10 m.

SURVEYORS: American Bureau of Shipping, Bureau Veritas (Paris), China Corporation Register of Shipping, Det Norske Veritas, Germanischer Lloyd, Lloyds Register of Shipping, Nippon Kaiji Kyokai, Registro Italiano Navale, USSR Register of Shipping.

GANGWAY/DECK WATCHMEN: Watchmen are necessary. Best to use crew.

OPENING/CLOSING HATCHES: Crew can open completely mechanical hatches only. All other hatches opened by waterside workers.

CERTIFICATES: Register, De-ratissation, Load Line, Safety Equipment, Safety Radio, Articles of Agreement, are main Certificates required.

CUSTOMS ALLOWANCES: 1 bottle of spirit (in use) *or* 1 bottle of wine (in use) *and* 12 quart bottles (or the equivalent) of beer, 200 cigarettes *or* half a pound of tobacco *or* 50 cigars. For ship use only. To be declared on Search List. Also gifts up to a total value of $10.0 may be landed.

CARGO GEAR: Preventer guys must be entirely wire. All blocks and shackles must be moused. Safety strops on all heel blocks. All wires, ropes, chains and blocks to have Certificate of Test.

REPATRIATION: All facilities exist for repatriation.

AIRPORT: 23 km. from harbour to airport. Served by all major international airlines.

TIME: Local time is GMT plus 12 hours, add 1 hour for Summertime, October to March.

HOLIDAYS: Only the Container Terminal works during the following holidays. New Year's Day (1st January); Good Friday; Easter Monday; Anzac Day (25th April); Queen's Birthday (first Monday in June); Labour Day (fourth Monday in October); Christmas Day; Boxing Day; Waitangi Day early February. In addition, each Province has an Anniversary Day and a Waterside Workers' Picnic Day. In Auckland these are in last half January.

POLICE/AMBULANCE/FIRE: All emergency services are called through one telephone number. Dial 111 and state service required.

TELEPHONES: Telephones at all berths. Cost is $2.30 fee phone per day, plus the cost of any overtime incurred in connecting or disconnecting any such telephone. Telephones (coin operated) may be hired for use of crew on application to Post Office.

SERVICES: Services include tank cleaning, compass adjusting, all cargo surveying, average adjusting, etc. Tank washings may be pumped to road tankers.

GENERAL: *Refuse Disposal:*

It is important that no refuse be allowed to pass into tidal waters either directly or indirectly. This is covered by strict Government Regulation.

Masters should ensure that refuse is lowered into refuse boat "Manui" and not thrown into boat from any great height.

No refuse will be collected from stern of vessel as this is hazardous for collection craft. A suitable site in way of the flat side of the vessel on off shoreside should be chosen.

SHORE LEAVE: Crew members may go ashore.

IDENTIFICATION CARDS: Not required.

REGULATIONS: All guests aboard vessel in the evening must have passes signed by the Master. All visitors' passes expire at 2300 hrs. All ships in port are subject to the Rules and Regulations contained in the Harbours Act 1950, and the By-laws of the Auckland Harbour Board. On first visit to the Port copies of these and other relevant Regulations are supplied to ships.

DELAYS: During 1977 average delay 1.5 days for container ships but with completion of extensions towards the end of 1978 these will be eliminated. Seldom any delays awaiting other berths.

DEVELOPMENTS: Extensions to Fergusson Wharf Container Terminal are under construction which will: increase the quay length to 610 m. provide an additional land area of 5.855 ha. provide facilities for an additional 610 refrigerated containers. A third Vickers Hoskins/Paceco container crane is scheduled to be commissioned at Fergusson Wharf Container Terminal in late 1978. Construction is in progress on the first stage of a 20 ha. Inland Container Terminal at Wiri 22.5 km. from the port. Interim facilities are being prepared at Freyberg Wharf to provide additional accommodation for quarter-ramp Ro-Ro vessels.

AUTHORITY: Auckland Harbour Board.

BLUFF: 46.37 S. 168.22 E. (See Plan Book)

DOCUMENTS: See "Auckland".

PILOTAGE: Pilotage is compulsory. Pilots board vessels from a launch within a 3-mile radius of signal station on Stirling Point, and always well to seaward of 6 fathom line. Arrangements regarding boarding will be made by radio-telephony or wireless-telegraphy.

Vessels, other than those which are exempt from pilotage, must not proceed inside Bluff Foreshore Light without a Pilot.

Pilots do not usually board vessels between sunset and sunrise except in reasonable weather.

Caution: Vessels stopping to pick up a Pilot are particularly warned not to approach entrance shoal too closely, especially during flood stream as stream sets strongly on to entrance shoal, North-eastward.

Coastal Pilots: Coastal Pilots are available on 24 hours notice for piloting service from Tairoa Head to Milford Sound.

ANCHORAGE:

Southward of Stirling Point: In fine weather, vessels missing tide may anchor in 10 to 12 fathoms with Stirling Point lighthouse bearing about 356° and Dog Island lighthouse bearing about 108°.

Eastward of Dog Island: A good anchorage for vessels delayed longer than 6 hours awaiting to enter Bluff is situated 5 miles East of Dog Island.

RESTRICTIONS The safest time to enter the harbour is at slack water. Strict attention should be paid to signals passed from the signal station on Stirling Point. No vessel should attempt to enter without a Pilot, unless possessing local knowledge.

Least depth in fairway is 28 ft. on Northern edge of Channel Rocks; also 25 ft. (about 1 cable West North-westward of the tidal beacon).

MAX. SIZE: Length, 620 ft., overall beam, 95 ft. Maximum draft permissible in approach channel: 30 ft. 0 in. at HW, 22 ft. at LW. The Board has been carrying out extensive blasting and dredging in the entrance channel and it is anticipated that a further increase in the present port draft of 30 ft. in the entrance channel will be made but this will be publicised at the time when it can be confirmed.

HEALTH: Radio pratique available at Berth.

RADIO: A signal station is situated on Stirling Point and is connected by telephone with harbour officials. A continuous watch is maintained and vessels can communicate by the International Code of Signals or the Morse Code. There is a radio-telephone at signal station. Call sign is "Bluff Harbour Radio", calling frequency is 2,182 kc/s, and the working frequency is 2,012 kc/s. VHF radio having Channels 16 and 12. Watches are maintained from 33 to 40 minutes past the hour, every hour. After radio-telephone contact has been established further listening watches can be made by mutual agreement.

TUGS: Two tugs are available. Both twin-propulsion Voith Schneider vessels of 1,200 i.h.p. and 15.3 tons static pull and 2,600 h.p. and 30 tons. Both vessels are equipped for fire fighting and salvage.

BERTHING:

	Berth No.	*Dredged depth L.W. (draft 2 ft. less or maximum)* ft.	in.
Island Harbour:			
	1	26	
	2	26	
	3A	30	
	3	35	
	4	35	
	5	35	
	6	25	
Town Wharves:			
	11	31	6
	12	29	6
	14	26	6
Tiwai Wharf:		38	

STEVEDORES: Agents require ETA in advance to arrange labour for cargo handling.

MEDICAL: Port doctor available through Agents. Nearest hospital is at Invercargill City, 16 miles from Bluff. Medical service whilst at sea; through Awarua radio.

TANKERS: Tankers are berthed at No. 11 berth only, Town wharf. Side connections are to be used. Only 1 pipe-line connection on wharf.

It is not permitted to commence the discharge of oil cargoes during the hours of darkness. No vessel carrying a cargo of motor spirit or having discharged such cargo will be handled during the hours of darkness.

Oil cargoes for Tiwai Point discharged at Tiwai Wharf.

DENSITY: 1025.

FRESH WATER: Available alongside all berths.

FUEL: Bunkering facilities are available. Boiler fuel is supplied by 8 in. diameter pipe-line located at No. 11 berth, Town wharf. Delivery rate 240 t.p.h. Limited quantities of coal, light diesel oil and lubricating oil can be arranged for delivery by road or rail to the wharves.

GANGWAY/DECK WATCHMEN: Available.

OPENING/CLOSING HATCHES: Usually carried out by stevedores, unless automatic then by crew.

CUSTOMS ALLOWANCE: See "Auckland".

IDENTIFICATION CARDS: Not required.

REPAIRS: Major repair work can be undertaken by the following: 2 small machine shops at Bluff; a foundry at Invercargill; a slipway for vessels of up to 500 tons displacement at Bluff. A diver is available for underwater inspections through agents.

REPATRIATION: Facilities exist.

AIRPORT: Internal air services from City Airport, Invercargill, 16 miles by road. Connecting with international airports of Christchurch, Wellington and Auckland.

TIME: GMT plus 12 hours. Summer Time GMT + 13 hrs. from November to February inclusive.

HOLIDAYS: Christmas Day; Boxing Day; New Year's Day; Second of January; Watersiders' Picnic Day (4th Monday, January); Good Friday; Easter Saturday (except by special arrangement); Easter Monday; Easter Tuesday; Labour Day; Anzac Day; Reigning Sovereign's Birthday.

POLICE/AMBULANCE/FIRE:

	Tel. (Emergency)	*(Other)*
Ambulance	Bluff 111	Ingrill 4119
Police	Bluff 111	8844
Fire Brigade	Bluff 111	

TELEPHONES: By arrangement, all vessels can be connected with telephone system.
SERVICES: Compass adjusting, refuse collection daily.
SHORE LEAVE: Allowed.
AUTHORITY: Southland Harbour Board.

GISBORNE: 38.42 S. 178.02 E. (See Plan Book)

PORT LIMITS: All of Poverty Bay within a line from the Northern point of Young Nick's Head to Tuaheni Point.
DOCUMENTS: See "Auckland".
PILOTAGE: Telegraphic address – Harbour Master, Gisborne. Advance notice – 24 hours of ETA and further confirmed at 4 hours of ETA. VHF Channel 12.

Pilot boat is painted white with word "Pilots" on both sides, 45 ft. in length; exhibits pilot flag or lights. Pilot boards on line of leads (332°) 2 miles from breakwater light.
ANCHORAGE: Vessels awaiting Pilot and berth anchor with Tuaheni Light bearing 084° 3.2 miles in 10 fathoms of water.
RESTRICTIONS: Vessels may be berthed at night according to size, draft and weather conditions.
MAX. SIZE: Maximum length, 570 ft. OA. Beam, No restriction. Draft, 29 ft. at HW, 25 ft. at LW; there can be slight variations according to heights of tide and weather conditions.
HEALTH: Same procedure as "Auckland".
RADIO: Auckland Radio ZLD, Wellington ZLW.
RADAR/VHF: Radar service available – arrangements can be made through Signal Station by means of VHF Channel 12.
TUGS: Tug joins vessels in channel outside breakwater. Normally use ship's lines; if tug's lines used, no extra charge.

A twin screw Schottel Rudder/Propeller 22 m. steel tug is in service. Bollard pull 14 tonnes, 1,000 h.p.
BERTHING: 700 ft. at 32 ft. depth LW; 1,400 ft. at 18 to 20 ft. depth LW.
Moorings: Shore hawsers placed on vessels on arrival.
SPECIALISED CARGO FACILITIES: Two 1,000 tons for bulk grain etc. silos behind No. 7 berth and a conveyor for loading grain etc. in ships. Loading rate 400 t.p.h. There is also a fish unloader, rate 40 t.p.h.
STEVEDORES: Advice of ETA and particulars of stowage required in order that required number of gangs can be ordered. Hours of work, Monday to Friday, 0700–1200 hrs., 1300–1800 hrs.; Saturday, 0700–1200 hrs.
MEDICAL: No advance advice required for medical attention. Full hospital facilities available.
TANKERS: Tankers discharge fuel oil and bitumen.
DENSITY: 1025 at all stages of tide.
FRESH WATER: Available by 2.5 ins. hoses at approx. 40 t.p.h. per hose.
FUEL: Fuel is at present only available by rail tanker and should be ordered through ship's Agent in advance.
DEVELOPMENTS: It is expected that present overseas berth will be increased from 700 ft. to 1,300 ft. within about 3 years.
GANGWAY/DECK WATCHMEN: Ships at present provide own watchmen.
OPENING/CLOSING HATCHES: Stevedores normally carry out this work.
CUSTOMS ALLOWANCE: See "Auckland".
IDENTIFICATION CARDS: Not required.
CONSULS: None.
REPAIRS: Normal maintenance repairs.
DRY DOCKS: One 400 ton slipway.
REPATRIATION: Full facilities available for effecting crew changes and repatriation. However, no seaman's pool operating at Gisborne. Replacement crew must be obtained from either Auckland or Wellington.
AIRPORT: 3.5 miles. Regular internal service.
TIME: Standard Time is related to the meridian of 180° *East*, i.e. 12 hours ahead of GMT.
AUTHORITY: Gisborne Harbour Board.

LYTTELTON: 43.35 S. 172.42 E. (See Plan Book)

PORT LIMITS: All those tidal waters of the Port of Lyttelton comprised within the area enclosed by the arc of a circle having a radius of 3 nautical miles from the Northernmost point of Adderley Head.
DOCUMENTS: Customs procedure. Overseas vessels, on arrival in New Zealand, should have following papers ready to produce to Customs Officers:

Particulars of Ship's Certificates.
List of Persistent Oils (Tankers only).
Notification of Liability to pay entry tax (Fishing vessels only).
Register.
Names of Owners and Agents.
Crew List.
Passenger List.
List of Prohibited or Restricted Immigrants.
Search List.
Stores List.
List of any stock or birds on board.
List of Poisons.
List of Firearms.
Statement of excess Tonnage of Cargo.
Statement of quantity of Fuel Oil in double bottoms.
Declarations by Passengers arriving in New Zealand.
Baggage Declarations by Passengers for duty purposes.

On departure for overseas, Master or his Agent is required to produce:

Manifest of Cargo.
Stores List.
Crew List.
Passenger List (if any).
Clearance from the Marine Department (if a British ship).

A home trade vessel under *transire* is required to produce her cargo book to Collector of Customs and such particulars as to passengers, crew, and cargo as the Collector may at any time demand. Cargo book shall contain name and port of registry of ship, Name of Master, and date of arrival at, and departure from each port. Particulars as to dates of arrival and departure must be entered not later than 24 hrs. after time of such arrivals and departures.
PILOTAGE: Masters requiring services of a Pilot must notify Harbour Master of their estimated time of arrival and max. draft not later than 1600 hrs. on day prior to arrival (Monday to Friday). If estimated time of arrival is on a Saturday, Sunday or any public holiday which falls on a Monday, notification must be given before 1600 hrs. on previous Friday. International Code of Signals or Morse Code used for communicating with signal station. Station also equipped with radio telephone. Call sign is "Lyttelton Harbour Radio", calling frequencies is 2182 kc/s and working frequencies are 2012 and 2162 kc/s, a continuous listening watch being maintained. Radio telephone equipment also installed in the tug, pilot cutter and Harbour Master's office, and same call signs, frequencies and watches are employed. VHF in operation on International Channels 12, 14 and 16.

Pilot vessel is 16.46 m. in length. Equipped with radar, radio telephone and echo sounder. The pilot vessel is located at the tug wharf in inner harbour and any vessel awaiting arrival of the Pilot, should anchor about 1.5 miles to seaward of Godley Heads, in a depth of 16 m. to 18 m. and await instructions.

The limit of pilotage is a line joining Godley and Adderley Heads. Every facility must be provided to ensure safe boarding of the Pilot.
ANCHORAGES: *Camp Bay:* Permission must be obtained from the Harbour Master before using this anchorage and draft of vessel is restricted to 8.5 m. All vessels drawing more than 8.5 m. whether awaiting a Pilot or not must use the outside anchorage. Vessels using Camp Bay anchorage should anchor with the anchorage lighted leading beacons situated on the Southern shore of Camp Bay, in transit, bearing 195.5°. Each beacon is painted white and exhibits a fixed red light. Vessels may anchor to the Westward of this bearing but must not proceed Westward of a line bearing 345° from the rear anchorage beacon.
Note: Anchoring in or near the dredged channel which extends 2 km inside Heads is not permitted.
RESTRICTIONS: Cargo vessels not berthed during hours of darkness, except at Cashin Quay.

Tankers are berthed during hours of daylight only. All vessels can depart from their berths during hours of darkness. Vessels holding pilotage exemptions may also enter or depart during the hours of darkness.

The following are the controlling depths at mean low water springs, mud bottom in each case;

entrance to port 14.6 m.
dredged channel 11.30 m.
inside anchorage 11.0 m. (Camp Bay)
approaches to berth 11.3 m.–9.8 m.
alongside berths 12.20 m.–8.60 m.

MAX. SIZE: Max. draft permissible for entering or leaving: 11.28 m. at high water and 9.75 m. at low water. Vessels drawing less than 9.75 m. can enter at any state of the tide. Max. size permissible for entry: length 260 m. at Cashin Quay, any additional length contact Harbour Master, 230 m. at Inner Harbour. No limit on vessel's beam.
HEALTH: Master of every ship about to enter a New Zealand port shall, not later than 12 hrs. and not earlier than 24 hrs. before expected time of arrival at that port, inform Port Health Officer by radio of last port of call, date of departure therefrom, and state of health of vessel.

Arrival of vessels. On arrival, vessel showing International Code quarantine signal, should proceed to inspection to await arrival of Port Health Officer. Inspections are normally carried out at berth.

Radio pratique. Certain ships may be granted pratique by radio and hence need not be visited by a Port Health Officer, provided that medical officer carried as part of ship's complement.

Maritime Declaration of Health. Master of all vessels arriving in New Zealand from any port beyond New Zealand shall complete and deliver to Port Health's Officer a maritime declaration of health countersigned by the ship's medical officer, if required.

Crew List and Passenger List. Master of every ship liable to quarantine should be prepared to furnish Port Health Officer a list of all passengers, showing in respect of each passenger, name, sex, race, age, and port of embarkation; and a list of crew giving the name, race, and rating of each member.
RADIO: Wellington Radio, call sign ZLW; Awarua, call sign ZLB; or Auckland, call sign ZLO.
TUGS: Normally join vessel at Parsons Rock Beacon. Tug lines are used, charge for which is included in the overall hire for tug. Number of tugs required depends on type of vessel and draft.
BERTHING: Requirements for berthing at berths 2, 3, 4, 5, 6 and 7

for vessels over 1,000 tons net are; bow out, the anchor to be used and gangway turned in until vessel secured at berth.

STEVEDORES: Waterside labour can be ordered after arrival of ship at 0630 hrs. up to 0900 hrs. For work on Saturdays orders must be placed by 0900 hrs. Friday. Saturday afternoon work to be ordered by 1030 hrs. Saturday.

For supplementary hours labour must be requisitioned by 1500 hrs. previous Friday and confirmed by 0700 hrs. Monday and daily.

SPECIALISED CARGO HANDLING FACILITIES:

No. 1 Breastwork, Inner Harbour: Grain silos. 2,000 tons capacity, 250 t.p.h. loading rate for coastal shipments.

No. 1 Cashin Quay: Bulk Loading Facilities: Woodchips, grain, etc.

Gladstone Pier, East: Bulk cargo discharges: 5×5-ton electric cranes, 3×100-ton mobile bulk hoppers.

No. 2 West: Roll-on/Roll-off Coastal and Trans-Tasman Cargo Terminal.

No. 2 Jetty West, Inner Harbour: Roll-on/Roll-off, Passengers and Cargo Terminal.

MEDICAL: Hospital facilities are available at Christchurch, 9 miles from port, and international regulations apply in regard to inoculations, vaccinations, etc. Agents can be notified at any time of medical allocation required, preferably with 24 hours notice.

TANKERS: All tankers berth alongside oil wharf in Inner Harbour. One berth only is available with a max. draft of 11.28 m. A 10 in. line is used for discharging and loading with suitable fittings for reduction to 8 in. Slop or oily residue facilities are not available.

Oil hoses can be connected and disconnected during hours of darkness with Harbour Master's permission. Side connections are connected to discharging arms situated at the middle of the oil wharf.

Berthing is generally starboard to, head out.

DENSITY: 1025, salt water.

FRESH WATER: Available at all berths delivered by hose at a discharge rate of 20 t.p.h.

FUEL: Bunkering facilities available: Oiler fuel oil, supplied by 4 in. and 6 in. diameter bunker hose connected to an 8 in. diameter pipeline, located on the oil wharf.

FIRE PRECAUTIONS: Tankers are not permitted to immobilise engines at the oil wharf. Repairs may be carried out at other wharves with Harbour Master's permission. Boiler and galley fires are not required to be extinguished when loading or discharging. All scuppers are to be plugged and cemented in case of spillages.

DEVELOPMENTS: The new container terminal at Cashin Quay No. 3 was first used by "ACT 2" in June 1977 and has the following facilities: Heavy duty berth 285 m., depth alongside 12.2 m., draft 11.28 m., terminal area 8ha, container slots 1600 stacked two high, reefer electrical connections 546, one Paceco 40 tonne single-lift container crane, seven Clark No. 520 straddle carriers – forklifts, container washing and repairs, CFS – No. 2 transit shed 6680 sq.m., Operator – Lyttelton Harbour Board.

GANGWAY/DECK WATCHMEN: All ships must be provided with a watchman whilst at oil wharf; a shore watchman is also required. Watchmen can be ordered at any time by contacting Seamen's Union at Lyttelton.

OPENING/CLOSING HATCHES: This work is carried out by waterside labour.

CUSTOMS ALLOWANCES: 8 ounces and/or 200 cigarettes per man. 1 bottle of wine and/or 1 bottle of spirits per man.

IDENTIFICATION CARDS: Passes are necessary at oil wharf but not required otherwise.

CONSULS: At Christchurch.

Australia	66-221	Japan	60-446
Belgium	77-905	Netherlands	65-669
Denmark	899-099	Norway	65-079
Finland	60-709	Sweden	65-179
France	60-085	U.S.A.	65-864
Italy	62-799		

REPAIRS: Major work can be undertaken at Lyttelton where a machine shop and foundry are available.

DRY DOCK: A graving dock is available for vessels up to 6,500 gross tons and dimensions of dock are floor length 137.15 m., top length 146.75 m., top width 25 m., entrance width 18.90 m., width in way of ships bilge 16.61 m., sill depth at MHWS 6.63 m. A patent slip is available for vessels up to 231 tons.

REPATRIATION: Facilities are available.

AIRPORT: Distance from Christchurch – 6 miles, served by regular airlines.

TIME: Local time is 12 hrs. ahead of GMT, no alteration to clocks.

N.Z. daylight time from 0200 hrs. (NZST) on last Sunday in October until 0200 hrs. (NZST) on the first Sunday in March – 13 hours ahead of GMT.

HOLIDAYS: Holidays throughout year shall be New Year's Day; Anzac Day; Provincial Anniversary Day; Waitangi Day; Good Friday; Easter Monday; Labour Day; Birthday of Reigning Sovereign; Christmas Day; Boxing Day; and the Harbour Board's employees picnic day (to be held on same day as the Waterside Workers' Union picnic day. No cargo work is carried out on these days.)

POLICE/AMBULANCE/FIRE: For emergency calls from ships telephones, dial 111 and ask the operator for service required.

TELEPHONES: Arrangements can be made with Harbour Master for telephones to be placed on board.

SERVICES: Tank-cleaning and tank-washing facilities are available as well as a compass adjuster.

SHORE LEAVE: Crew members are allowed ashore.

AUTHORITY: Lyttelton Harbour Board, Christchurch.

NAPIER: 39.29 S. 176.54 E. (See Plan Book)

DOCUMENTS: See "Auckland".

PILOTAGE: Vessels should advise ETA and draft to Harbour Master Napier 24 hours prior to arrival, ETA to be confirmed or amended 4 hours before original ETA or 4 hours before arrival, whichever first.

VHF pilot boat and watchtower. Listen Channel 16. Work Channel 12.

Pilot boat 45 ft. long, painted white, funnel green over blue with white dividing band and red spoked wheel on white disc and black top. Pilot boards inward vessels on main leads 1 mile East of roadstead buoy.

ANCHORAGES: Anchorage 1 mile East of roadstead buoy. 9 fathoms. Bottom sand and mud.

RESTRICTIONS: Vessels are berthed between 0500 hrs. and sunset. Vessels up to 26 ft. draft may berth at any state of tide.

MAX. SIZE: Max. length OA 680 ft,; beam, no limit; draft, 30 ft. with extension to 31 ft. Subject to beam of vessel and prevailing conditions.

Tanker and bulk carriers berthed at 31 ft. draft. Subject to prevailing conditions and being able to commence discharge immediately on arrival.

Also see "Developments".

HEALTH: Cable port health Napier 24 hours before arrival. Doctor will board on arrival.

RADIO: Cables should be routed through Wellington Radio ZLW. Radio telephone -Napier Watchtower listens 2182 kc/s for 15 mins. Call sign "Napier Harbour Radio" at following times; 0400, 0800, 1200, 1600, 2000, 2400 hrs., and by arrangement. Working frequency is 2162 kc/s. VHF listening watch as above for R/T and continuous during office hours.

TUGS: Two tugs, take tugs' lines inside breakwaters.

BERTHING: Vessels at max. draft limited to HW. Notification must be received before 1500 hrs. on Friday for any shipping movement over weekend and 1500 hrs. on day preceding public holidays.

SPECIALISED CARGO FACILITIES: Wood pulp store situated adjacent Higgins Wharf South, area 126,000 sq. ft. with 27 ft. clear height.

Bulk fertiliser store adjacent Higgins Wharf, capacity 60,000 tons.

Electric power and storage for 240×20 ft. reefers. 30,000 sq. ft. container packing and unpacking shed. 4 acre paved dry box yard. Serviced cleaning yard for 20×20 ft. reefers. Tank for tallow and edible oils being built.

STEVEDORES: ETA required for discharge ships 24 hours before arrival. Loading ships 48 hours before arrival with proposed stowages and vacant spaces. Advice number of gangs able to work. All work done by ship's gear.

MEDICAL: No prior notice required for medical attention. Hospital facilities available. Advice would be needed of any contagious disease on board in advance.

TANKERS: Standard size discharge lines. All connections supplied by oil companies. Five berths, max. draft 31 ft.

DENSITY: 1025.

FRESH WATER: Available all berths 20T per hour per hose.

FUEL: 220 and 1,000 p/sec. Oil available ex-pipe-line at 110 t.p.h. L/Marine diesel and gas oil ex-road tanker. All at immediate notice. Lubricating oil available. 1 weeks notice. No residue service available.

FIRE PRECAUTIONS: Watchman supplied on wharf at ship's expense when tankers discharging.

GANGWAY/DECK WATCHMEN: Cargo watchmen supplied on request at current award rates.

OPENING/CLOSING HATCHES: Hatches normally opened and closed by stevedores unless automatic type.

CERTIFICATES:

Ship's Register
Health Certificate
Cargo Safety Certificate
Radio Safety Certificate
Load Line Certificate

CUSTOMS ALLOWANCES: See "Auckland".

IDENTIFICATION CARDS: Not required.

REPAIRS: First class service available.

REPATRIATION: On arrangement with Customs and vessel's Agents.

AIRPORT: Hawke's Bay Airport, served by internal airline 3 miles from port.

TIME: GMT plus 12 hours.

HOLIDAYS: New Year's Day; 2nd January; Picnic Day (last Monday in January) (vessels berthed but cargo not worked on any of these holidays); Anniversary Day (2nd to last Monday in January); Good Friday; Easter Monday; Anzac Day (25th April); Queen's Birthday (1st Monday in June); Labour Day (nearest Monday 25th October); Christmas Day; Boxing Day.

POLICE/AMBULANCE/FIRE: Emergency telephone 111.

TELEPHONES: Connection all berths.

SHORE LEAVE: No restrictions.

DEVELOPMENTS: Entrance channel being dredged to 12 m. (outer) and 11.5 m. (inner) and basin to 11 m. Kirkpatrick reclamation continuing. Kirkpatrick wharf being extended. Tanks for tallow and edible oils being built. Draft to be extended to 10 m. with later extension to 10.7 m.

AUTHORITY: Hawkes Bay Harbour Board.

NELSON: 41.17 S. 173.17 E. (See Plan Book)

PORT LIMITS: Within 3 miles radius of Nelson Lighthouse.
DOCUMENTS: See "Auckland".
PILOTAGE: Compulsory for vessels of 100 n.r.t. and over. If possible 24 hours notice of ETA to Harbour Master. Confirm ETA before 1600 hrs. Friday if arriving during weekend or public holiday.

Radio telephone 2182 kc/s. and 2162 kc/s., call sign "Nelson Harbour Board" Listening watch 10 minutes every 4 hours commencing at 0000 hrs. After contact has been established a further listening schedule can be arranged.

VHF on Channel 16 listening and Channel 12 working. Pilots board inward-bound vessels about 1.5 to 2 miles to seaward of main entrance.

Anchorage awaiting Pilot in depth about 30 ft., mud, with Boulder Bank lighthouse bearing 130° distance 8 cables. Pilot vessel 40 ft. planing hull, speed 18 knots, painted orange.
ANCHORAGES: Anchorage as indicated in pilotage or further seaward according to weather conditions, draft and length of stay at anchor.
RESTRICTIONS: Vessels may enter, berth, unberth, or leave during hours of darkness. Overseas vessels (over approx. 380 ft.) enter port on flood tide and usually swing and berth port side to.
MAX. SIZE: Max. permissible length 630 ft. Beam no limit. Draft limits 28 ft. Max. draft at Main Wharf is 26 ft.
HEALTH: Doctor clears vessel after berthing. Pratique automatic after clearance at first port. If suspected disease or fever on board advise Medical Officer of Health, Nelson, by radio and await instructions.
RADIO: ZLW Wellington Radio; ZLB Awarua Radio; ZLD Auckland Radio.
TUGS: Two tugs available, joins vessel inside harbour. Tug's own line used on berthing. Tugs are equipped for fire-fighting.
BERTHING: Vessels should endeavour to make their arrival as early on flood tide as possible.
SPECIALISED CARGO-HANDLING FACILITIES: Facilities are available at one general cargo berth for discharging motor spirits and oil. Another berth is used for loading wood chips pneumatically (the loading equipment is owned by Nelson Pine Forest Limited, Nelson). Common user Roll-on/Roll-off Link span.
STEVEDORES: Labour ordered 0700 hrs. for weekday work; 0900 hrs. Friday for Saturday work. ETA should be received by Agents before these times.
MEDICAL: Advise Agents of any medical attention required, giving up to 24 hours notice. Hospital facilities are obtainable. Smallpox vaccination certificates are required.
TANKERS: Diameter of discharge pipe, 10 in. white products; 8 in. black oil. No slop discharge facilities. Oil tanker berth, one only. Max. draft at berth 26 ft.
DENSITY: Average sea water, 1025.
FRESH WATER: Obtainable at any time. Approximately 20 t.p.h. delivery rate.
FUEL: Marine fuel oil, gas oil. Notice required, 24 hours.
GANGWAY/DECK WATCHMAN: Watchman necessary but usually provided by ship's crew. Shore watchman can be engaged if requested by vessel. Cost in accordance with national award.
OPENING/CLOSING HATCHES: By stevedores only.
CUSTOMS ALLOWANCES: See "Auckland".
IDENTIFICATION CARDS: Not required.
REPAIRS: Deck and engine repairs are possible. (No underwater damage repaired.)
DRY DOCKS: Slipway available for up to 1,500 ton vessels.
REPATRIATION: Facilities exist.
AIRPORT: Distance 3 miles. Served by internal airline only.
TIME: GMT plus 12 hours. Daylight saving in Summer months, advance clocks 1 hour.
HOLIDAYS: New Year's Day (1st Jan.); 2nd Jan.; Picnic Day (usually near end Jan.); Anniversary Day (1st Monday in Feb.); New Zealand Day (6th February); Good Friday; Easter Monday; Queen Elizabeth II Day (1st Monday in June); Labour Day (4th Monday in October); Christmas Day; Boxing Day. No cargo work on these days.
POLICE/AMBULANCE/FIRE: Police 88309; Ambulance 88299; Fire 81589; Emergency calls, dial 111.
TELEPHONES: Can be connected on board.
SHORE LEAVE: Allowed.
SHORE POWER: 400 v., 3 h.p. 50 Hz, 60 amps max.
AUTHORITY: The Nelson Harbour Board.

NEW PLYMOUTH, Port Taranaki: 39.03 S. 174.03 E. (See Plan Book)

PORT LIMITS: All waters contained within the area of a circle with radius 2.5 nautical miles whose centre is the trig station on Mount Moturoa in position 39° 03′ 56.8″ S. 174° 01′ 44.9″ E.
DOCUMENTS: *Customs:* See "Auckland".

Agriculture: Shipmaster's Bond List. Meal Locker Declaration Form AGL 36 (2 copies).

Health: Maritime Declaration of Health (issued by Port Health Officer).
PILOTAGE: Compulsory. Telegraphic address "Harbour Master, New Plymouth". 3 days notice preferable with 1 day confirmation. VHF Channel 16. R/T 2182 kc/s.

Pilot boat white with buff deckhouse, either "Rawinia" or "Pilot" in black on side. Pilot taken on board about 1.5 miles due North of Main Breakwater Head.
ANCHORAGE: Vessels can anchor to the West of a line due North from the Main Breakwater head seaward of the 10 fathom line. Good holding on sandy bottom. Not recommended in Northerly weather conditions.
RESTRICTIONS: Ships not berthed during hours of darkness although permitted to sail. Draft max. 30 ft. (9.15 m.) may be exceeded after prior consultation with Harbour Master. Ships under 21 ft. not affected by state of tide. In range 21 ft. to 30 ft. (9.15 m.) time of berthing relevant to high tide.
MAX. SIZE: Max. size 700 ft. (213.4 m.) overall, breadth no limit.
HEALTH: Port doctor boards on arrival at berth. In event of suspected disease on board, will board in pilotage area. Pratique automatic if vessel has already called at another New Zealand port.
RADIO: Radio telephone system operates watches for 15 minutes every 4 hours from midnight. Call sign New Plymouth Harbour Radio, call frequency 2182 kc/s. Working frequency 2012 and 2162 kc/s. 24 hour watch maintained on VHF Channel 16. ETA cables generally received through Wellington Radio. All outward messages routed through Wellington Radio.
TUGS: One tug available. 700 h.p.
BERTHING: In general all ships are swung in basin coming alongside berth stern first. Shore moorings are used.

Breakwater: Length, 122 m.; width, 10 m.; depth alongside LWOST, 5.5 m. For use by oil field barges, supply vessels and fishing vessels. Road transport only.

Moturoa Wharf: Length, 335 m.; width, 27.4 m.

East side of wharf: 1 berth 260 m. long, depth alongside LWOST 10 m. Four 3 tonne portal cranes (5 tonne at reduced radius) 1 berth 76 m. long, depth alongside LWOST 4.9 m.

West side of wharf: 1 berth 137 m. long, depth alongside LWOST 7.9 m. Bunkering point on No. 2 berth. All classes of bulk oil may be discharged at No. 2 berth. Road and rail transport may be used to load and discharge dry cargo.

Newton King Wharf: Being demolished and replaced with jetty for tanker use only. During reconstruction only one tanker berth available on this wharf. Expected completion 1980.

Blyde Wharf: West side of the wharf: length, 426 m., width of apron, 19 m.; width including open storage, 82 m.; depth alongside LWOST, 11 m. Three 2 tonne portal cranes. Rail and road transport may be used to load and discharge cargo. Open hard standings for transit cargo storage are available, a small container facility is provided.

East side of the wharf: Length, 80 m.; width, 5.5 m. and 13.4 m.; depth alongside LWOST, 5.5 m. Road transport only. For use by oil field supply vessels.

One mobile Lima heavy lift crane capacity 70 tons at 12 ft. from wharf edge to 25 tons at 40 ft. from wharf edge available at No. 2 berth, with restricted loading may be used on Blyde No. 1 also.
STEVEDORES: Labour must be engaged between 0700–0900 hrs. Monday to Friday. Agents should be advised ETA at least 24 hours, preferably 72 hours, in order arrange cargo if vessel loading. Normal cargo working hours Monday–Friday 0700–1200, 1300–1700 hrs. Saturday 0700–1200 hrs. Supplementary hours may be worked Monday–Friday. 1700–2300 hrs. if labour available. No work on Sundays.
MEDICAL: Hospital services available.
TANKERS: Black oils 10 in. pipe-line; white oils 8 in. pipe-line. 3 of 4 berths available for tankers, max. draft 30 ft. (9.15 m.). Private deballasting tank available 8,000 tonnes. Condensate S.G. 0.7738 Loading rate about 1,250 t.p.h.
DENSITY: Sea water.
FRESH WATER: Available all berths from main supply at about 100 t.p.h. Cost 42 cents per metric ton.
FUEL: Light fuel oil pipe-line connected all berths, except Blyde Wharf. Gravity fed at about 100 t.p.h. Can be arranged at 24 hours notice.
FIRE PRECAUTIONS: Tanker berths closed to public with Harbour Board watchman in attendance.
DEVELOPMENTS: New reclamation of 23 acres providing berths for 2 overseas vessels. Is now fully operational. These berths are suitable for handling heavy lifts, PAD type roll-on/roll-off vessels, limited container use and a container cleaning installation is provided.
GANGWAY/DECK WATCHMEN: Available but not necessary.
OPENING/CLOSING HATCHES: Stevedores must carry out this work.
CERTIFICATES:

Normal Safety Certificates.
Ship's Register.

CUSTOMS ALLOWANCES: See "Auckland".
IDENTIFICATION CARDS: Not required.
CONSULS: None available locally.
REPAIRS: All repairs except underwater work of a major nature.
REPATRIATION: Facilities exist.
AIRPORT: Is 7 miles from city, 10 miles from port. Served by domestic service only, 2 flights Northbound and Southbound each daily.
TIME: 12 hours ahead of GMT. N.Z. Daylight time observed.
HOLIDAYS: New Year's Day; Stevedores Picnic (4th Wednesday January); Provincial Anniversary Day (2nd Monday March); Good Friday; Easter Monday; Anzac Day (25th April); Queen's Birthday (1st Monday June); Labour Day (4th Monday October); Christmas Day; Boxing Day.
POLICE/FIRE/AMBULANCE: Telephone numbers respectively, 75449, 75505, 75439.
TELEPHONES: Can be connected on board.

GENERAL: Ship's garbage must be in covered containers supplied by Harbour Board and removed daily. Any meats on board vessel on arrival which have been supplied from other than Australia or New Zealand will be sealed off and fresh supplies obtained.
SHORE LEAVE: No restriction.
AUTHORITY: Harbour Master, Taranaki Harbours Board.

AGENT: Newton King Ltd., Shipping Department, 232 Devon Street East, (PO Box 244), New Plymouth, New Zealand. Telegrams, "Kingship". Tel. 75719 (10 lines) Business, 83174 Residence. Telex, N.Z 3275, Answerback "Newking".

ONEHUNGA: 37.03 S. 174.31 E.

PORT LIMITS: All that area of water contained within an area bounded to seaward by an arc of a circle 4 miles radius from the Southern extremity of Paratutai Island.
DOCUMENTS: See "Auckland".
PILOTAGE: Not compulsory, but arrangements can be made with the Harbour Master at Auckland to supply the services of a Pilot if required. A Pilot will then board a vessel off Te Priau, situated about 2 miles N.E. of South Head main light.

Pilotage District: All those waters of the Manukau Harbour contained within a line drawn 180° to the South shore from Jackie Hill on Kaiteke Point 015.5° – 2.85 miles approximately from the Southern extremity of Paratutai Island.

The signal station is equipped with both medium frequency and VHF radiotelephone. Call sign is "Manukau Habour Radio" and VHF Channel, 10, 11, 12, 13, 14 and 16.

Listening watches are maintained as follows—
0800 to 0830 – Call 2182 kHz, work 2012 kHz.
0830 to 0900 – Calling and working 2012 kHz.
1800 to 1830 – Calling 2182 kHz, working 2012 kHz.
1830 to 1900 – Calling and working 2012 kHz.
0800 to 0900 – VHF Channel 16.
1800 to 1900 – VHF Channel 16.
Other times by arrangement.

Note: Should a vessel be crossing the bar during the scheduled watch periods, the signalman will be working on 2012 kHz with that vessel and not listening on 2182 kHz.

Vessels equipped with radiotelephone must maintain contact with the signal station while working the bar.

Weather conditions permitting, information concerning bar conditions will be supplied on request to the signal station. Such information can only be regarded as a guide, as observations are made from the signal station which is situated about 5 miles from the bar and elevated 243.84 m. (800 ft.).

Radiotelephone – Onehunga: A radiotelephone is installed at the office of the Officer-in-Charge at Onehunga. The call sign is "Onehunga Harbour Radio" and the working frequency 2012 kHz.

Vessels equipped with radiotelephone, when within Puponga Point, must maintain a listening watch on 2012 kHz for information relative to berthing, harbour traffic or other harbour conditions.

No regular watches are maintained.
ANCHORAGES: After crossing the bar it is not advisable to anchor until after rounding Puponga Point, if proceeding to Onehunga; or after rounding Kauri Point (situated about 15 miles S.E. of Puponga Point), if proceeding to the Southward.

Prohibited anchoring and fishing area: Within an area extending 2 miles from Destruction Gully front beacon in a 182° direction and having a width of 152 m. (500 ft.) on each side of the transit of Destruction Gully beacons.

Prohibited Anchorage: Within 91 m. (300 ft.) of a sewage submarine pipe-line laid in a 152° direction across Wairopa Channel about 1 mile Westward of Onehunga Wharf. On the Northern shore, 2 white triangular beacons, each bearing the word "Sewer" in black letters, mark the middle of the prohibited anchorage. The pipe-line lies approximately 3 m. (10 ft.) to the Eastward of the beacons when in transit.

Prohibited Anchoring and Fishing Area: Anchoring and fishing are prohibited within an area bounded by a line commencing at the South end of Renton Road (Lat. 37° 00.08′ S., Long. 174° 45.2′ E.); thence running 180° for 2,590 m.; thence 090° for 5,291 m.; thence 050° to the shore. The Northern boundary commences at Nganui Point (Lat. 37° 00′ S., Long. 174° 48.4′ E.); thence 090° to the opposite shore.

The above area, adjacent to Auckland International Airport, is marked by following lights and beacons, bearings and distances from Aero light (37° 00′ 48″ S., 174° 47′ 31″ E., approx.).
Light F. 058° 45′ – 1,936 m.
Beacon 259° 30′ – 3,185 m.
Beacon 220° 45′ – 2,848 m.
Beacon 183° 15′ – 1,890 m.
Beacon 143° – 2,317 m.
Light Beacon Qk. Fl. 239° – 3,642 m.
Light Beacon Fl. R.2 secs. 122° 45′ – 3,466 m.
Light Beacon Fl. R.2 secs. 112° 45′ – 3,261 m.
Light Beacon Fl. R.2 secs. 108° 30′ – 2,453 m.
RESTRICTIONS: Berthing and unberthing during the hours of darkness is not recommended.

	Controlling Depths Below Chart Datum	*Nature of Bottom*
Entrance to port (Southwest Channel)	5.48 m.	Sand.
Anchorages	5.486 m. – 7.62 m.	Mud, Shell, and sand.
Channel	3.048 m.	
Approaches to berth	3.048 m.	
Berth (Onehunga)	3.3 m. – 4.7 m.	

MAX. SIZE: LOA, 95 m. Beam, No limit. Draft 4.7 m.
HEALTH: See "Auckland".
RADIO: See "Auckland".
VHF: See "Pilotage".
RADAR: No radar.
TUGS: 1 twin screw *Manukau* is available. 52.5 tonnes gross, 400 b.h.p., static pull 3.5 tonnes. Tug is equipped with both medium and VHF Radiotelephone.
BERTHING: The principal wharf is situated at Onehunga and is a ferro-concrete structure 293 m. in length which includes a launch jetty of 17 m. at the Eastern end, and with a width of 49 m. A grid for the use of small craft has been constructed immediately North of the wharf. There are small jetties at Cornwallis and Grahams Beach.

The deck level of the wharf is 6.401 m. above chart datum.

The wharf is connected to the railway system and the distance from the outside face of the wharf to the centre of the railway track is 3.73 m.
CRANES: No quay-side cranes. Two 12.5 tonne capacity mobile cranes available. For heavier loads cranes available for hire from outside port.
BULK CARGO FACILITIES: Eastern end of quay is equipped with a pipe-line for the discharge of bulk cement to adjacent privately owned silos.
SPECIALISED CARGO HANDLING FACILITIES: No facilities.
BRIDGES: None.
STEVEDORES: Arranged by Agents. See "Auckland".
MEDICAL: See "Auckland".
TANKERS: No facilities.
DENSITY: 1025.
FRESH WATER: Available.
FUEL: Boiler fuel oil, diesel oil, and lubricating oil are available from tank wagons; delivery at the rate of 13,500 litres per hour through a 50 mm. hose. Coal is not kept in stock but can be obtained.
CONSULS: See "Auckland".
REPAIRS: Outside firms are available to do machine shop and foundry work.
DRY DOCKS: No facilities.
SURVEYORS: See "Auckland".
GANGWAY/DECK WATCHMEN: See "Auckland".
HATCHES: See "Auckland".
CUSTOMS ALLOWANCE: See "Auckland".
CARGO GEAR: See "Auckland".
REPATRIATION: Full facilities exist.
AIRPORT: 8 km. from port. Served by major international airlines.
TIME: See "Auckland".
HOLIDAYS: See "Auckland".
POLICE/AMBULANCE/FIRE: All emergency services are called through one telephone number. Dial 111 and state service required.
SERVICES: No special services.
SHORE LEAVE: Crew members may go ashore.
REGULATIONS: See "Auckland".
IDENTIFICATION CARDS: Not required.
DELAYS: Seldom any delays.
DEVELOPMENTS: None currently in progress.
AUTHORITY: Auckland Harbour Board.

OPUA: 35.19 S. 174.07 E. **(See Plan Book)**

PORT LIMITS: Commencing at Northern extremity of Cape Wiwiki, thence by a right line to the Eastern extremity of the Nine Pins, thence by a right line to the North Western extremity of Cape Brett.
DOCUMENTS: See "Whangarei".
PILOTAGE: Compulsory Southward of a line from the Western extremity of Kororareka Point following a true bearing of 253° towards the flagstaff at Waitangi Treaty House. Pilotage shall be optional within the waters contained Northward of the above mentioned line and Westward of a line commencing from the Eastern extremity of Tapeka following a 350° True bearing to the Eastern extremity of the Black Rocks, thence in 271° True direction to the mainland. Pilots are available all hours day and night subject to prior minimum notice of 24 hours being received during normal weekday working day. Second notice confirming or amending first to be sent 4 hours before expected arrival. The Pilot supplies Harbour By-laws. Pratique, Agriculture and Customs clearance is normally undertaken on arrival at berth. Pilot vessel under private contract – No VHF contact — Pilot from Whangarei.
ANCHORAGE: Renown Anchorage as per Bay of Islands Chart N.Z. 5122.
RESTRICTIONS: Veronica Channel dredged to 7 m. at Chart Datum. Maximum Draft is 8.53 m.
RADIO: See "Whangarei".
TUGS: Available by arrangement with Northland Harbour Board, Whangarei. At least 72 hours notice required.
BERTH: Total length 214 m., width 12.5 m., overseas berthage on Eastern side of wharf. Depth at berth is 9.45 m. at MLWS. Wharf is serviced by rail.
CARGO HANDLING: Ships own gear. 2 permanent gangs available subject to Stevedore requirements as per Whangarei.
MEDICAL: Hospital and Ambulance at Kawakawa, 8 miles from Opua. Port Doctor at Paihia, 5 miles away.
DENSITY: 1025.
FRESH WATER: Fresh water available – 200 tonnes in storage. 35 cents per 1,000 litres.

FUEL: By arrangement with Oil Companies via road transport.
CUSTOMS ALLOWANCE: See "Whangarei".
CONSULS: See "Whangarei".
REPATRIATION: See "Whangarei".
TIME: See "Whangarei".
HOLIDAYS: See "Whangarei".
POLICE/AMBULANCE/FIRE: See "Whangarei".
TELEPHONES: Telephones available.
SHORE LEAVE: See "Whangarei".
SURVEYORS: See "Whangarei".
AIRPORT: See "Whangarei".
REGULATIONS: See "Whangarei".
DELAYS: See "Whangarei".
AUTHORITY: Northland Harbour Board.

OTAGO, (includes Dunedin, Port Chalmers and Ravensbourne): 45.46 S. 170.43 E. **(See Plan Book)**

DOCUMENTS: See "Auckland".
PILOTAGE: Address "Herbour Master, Dunedin." Through coastal radio stations ZLW (Wellington) or ZLB (Awarua) giving ship's name, draft, and ETA. First message 72 hours out, revise 24 hours out: if from another New Zealand port (coastwise) similar message as soon as possible after leaving that port. Subsequent contact with port private radio station Taiaroa Heads on 2182 kc/s. or VHF Channel 16. Pilot boat is 55 ft., white launch, also fitted with same frequencies, which meets vessels as required but does not remain on station otherwise. Boarding position is with Taiaroa Head Lighthouse bearing 170° distant 2 miles; good anchorage with Taiaroa Head Lighthouse bearing 160° – 2 miles, depth 12 fathoms. Pilots can always board in this vicinity provided Master has ship under way at slow speed and obeys Pilot's instructions. Vessels arriving to work general cargo should endeavour to embark Pilot by 0500 hrs. in order to be alongside berth ready to take labour on board at normal commencing hour of 0700 hrs.
ANCHORAGES: With Taiaroa Heads Lighthouse bearing 160° distant 2 miles, good holding ground in all weathers, safe except in very strong Easterly gales which are extremely rare. If this position is already occupied by another vessel, there is ample room close Westward, Northwestward, and Northward. Depths 12 to 16 fathoms.
RESTRICTIONS: Tankers proceeding to or from the oil jetty at Dunedin make passage of the upper harbour in daylight hours only. Otherwise ships are not boarded between midnight and 0500 hrs. as no working time is gained by so doing, unless vessel requires HW for transit.
MAX. SIZE: For berthing at *Port Chalmers:* Max. draft 38 ft. at high water, 34 ft. at low tide. Channel is worked as required by circumstances; it is not restricted to slackwater. Max. size of ship 850 ft. length, larger vessels will be considered individually.

For berthing in the upper harbour at *Dunedin* or *Ravensbourne*, max. draft 26 ft. high water, 21 ft. zero tide; max. length 603 ft.
HEALTH: Master to radio to Port Health Officer (entry port in N.Z. only) 24 hours before ETA requesting free pratique or declaring adverse state of health. Agents will advise Port Health Officer and Health Department inspectors who will board vessel on arrival, alongside actual wharf if free pratique requested. N.Z. regulations will require sealing of domestic meat chambers and purchase of local meats for use coastwise.
RADIO: Through Awarua Radio ZLB or Wellington Radio ZLW.
RADAR/VHF: Port radio station at entrance Taiaroa Head (Harbour Radio) maintains 24-hour watch on R/T 2182 kc/s. and VHF Channel 16. Radar operated at station on request has range in excess of 20 miles to North and East.
TUGS: Tugs used in vicinity of wharves turning, berthing and unberthing, etc. Tug's lines used without charge.
BERTHING: Some restrictions for larger vessels berthing with flood tide at Beach St. Wharf Port Chalmers.
STEVEDORES: Labour for Saturday work must be ordered by 0830 hrs. Fridays, otherwise by 1430 hrs. for following day. Advise Agents of firm ETA in time to judge this. Evening shift work to 2300 hrs. can be arranged when labour available.
MEDICAL: Emergency medical services and full hospital services always available at short notice. Emergency advice by radio available. Top priority given arrangements for landing urgent cases for medical treatment.
TANKERS: Diameter of lines 8 in.; minor slop facilities only; one tanker discharge berth 700 ft. long, 28 ft. depth alongside at low water. Max. size ship 603 ft. long; draft for channel transit 26 ft.
DENSITY: Harbour density 1024 all states of tide.
FRESH WATER: Fresh water available all berths, approx. delivery rate 20 t.p.h.
FUEL: Bunkers available at oil berth; all grades up to 1,000 secs. Redwood.
DEVELOPMENTS: George St. Wharf Port Chalmers will have a second Portainer Gantry crane in operation in March, 1979.
GANGWAY/DECK WATCHMEN: Shore watchman not normally required except at entry to oil jetty, such watchman arranged for by oil company. Ships required to maintain own gangway surveillance.
OPENING/CLOSING HATCHES: Automatic hatch gear may be operated by ship's personnel. Manual hatches by shore labour only.
CERTIFICATES: Normal cargo gear and equipment certificates as required for British ports; also Fumigation (Rats) or Exemption Certificate.
CUSTOMS ALLOWANCES: See "Auckland".
IDENTIFICATION CARDS: Not required for British subjects. Alien identification cards to be retained on board in case of need.
CONSULS: Consular agencies France, Norway, Denmark, Sweden, Germany, Italy, Netherlands, Portugal.
REPAIRS: All types deck and engine repairs possible; good machine shops, etc.
DRY DOCKS: None.
REPATRIATION: Repatriation arrangements can be made.
AIRPORT: Dunedin is served by all internal main airlines with connections to overseas via Christchurch, Wellington and Auckland. Airport 35 minutes from Dunedin City by car.
TIME: N.Z. Standard Time throughout year is GMT plus 12 hours, except that Summer time now operates from last Sunday in October to first Sunday in March. (Add 1 hour).
HOLIDAYS: As for all N.Z. ports, i.e. January 1st and 2nd; Good Friday and Easter Monday; Anzac Day (April 25th); 1st Monday in June; Labour Day (Monday, nearest October 24th); Christmas Day and Boxing Day; Waterside Picnic day (Wednesday at end January). Where New Year and Christmas holidays coincide with Saturdays and/or Sundays, holidays are taken following Monday and/or Tuesday. General cargo not worked on these days nor on Sundays: tankers discharge 365 days: ships arrive and depart regardless of holidays. Container ships worked all days except Good Friday and Anzac Day.
POLICE/AMBULANCE/FIRE: Police 76012; Ambulance 77111; Fire Brigade 79111; Hospital 76740; Emergency (serious) dial 111 and ask for any service needed.
TELEPHONES: Slot telephones can be put on board with all local calls free, others by cash in slot.
GENERAL: No special moorings are required. Harbour, though tidal, is landlocked and there is no surge at any berth. Tide rise averages 6 ft. above datum (extremes 5 ft and 8 ft.).
SERVICES: Radar and gyro compass technicians available. Good shop and providore facilities. Compass adjuster usually available.
SHORE LEAVE: Crew members not restricted ashore.
REGULATIONS: No special local regulations, but all N.Z. ports have very strict rules for garbage collection and disposal, etc. and against oil spillage.
DELAYS: Ample berths normally available. Occasional delays for labour shortage or wet weather (rainfall average 30 in. per year). Small quantities bunkers available ex-tank wagons at any berth. Larger quantities obtainable by shifting to oil jetty outside cargo work hours or as otherwise convenient.
AUTHORITY: Otago Harbour Board.

PICTON: 41.17 S. 174.00 E. **(See Plan Book)**

PORT LIMITS: A straight line drawn in a 303° direction from Paparoa Point on Arapawa Island to the opposite shore of the mainland. A straight line drawn between East Head and West Head, Tory Channel Entrance.
DOCUMENTS: See "Auckland".
PILOTAGE: Pilotage is compulsory inside a straight line drawn in a 180° direction from Snake Point to the opposite shore, including all the waters of Tory Channel. Pilotage in the Outer Reaches of Queen Charlotte Sound and in Pelorus Sound is optional. Unless otherwise requested, Pilot will board vessels between Long Island and Motuara Island. By arrangement with the Harbour Master, Pilots will board vessels 7 cables East of Snake Point, where a Pilot is not required in the optional pilotage area. By arrangment with the Harbour Master, vessels may enter and leave via Tory Channel, subject to weather, when Pilot will board and leave 1 mile S.E. of West Head Light. Application for a Pilot must be made at least 4 hours before the estimated time of arrival. For vessels arriving at night or during the weekend, application should be made no later than 1530 hrs. on the last previous working day. Pilot boat 14.6 m. in length equipped with VHF radio Channel 16. Call sign "Picton Harbour".
ANCHORAGE: Except during strong N.W. winds, there is a good anchorage Northward of Mabel Island in 16 fathoms for vessels of all sizes.

Quarantine Anchorage. Within the navigable area to Westward of Mable Island enclosed between the foreshore and a line from Kaipupu Point 047° to the Western extremity of Mable Island, thence 349° to Wedge Point. Vessels not in quarantine can use this anchorage.
RESTRICTIONS: Controlling depth in approaches to anchorage is 13 m. MLWOS.
MAX. SIZE: Max. length 201 m. Draft, 11 m. aft, 8 m.–10 m. forward depending on length. Vessels of this size can berth at any state of the tide. Longer vessels may be accommodated by arrangement with the Harbour Master.
HEALTH: First entry at a New Zealand port pratique is granted after vessel berths provided she has a clean bill of health from her last port, otherwise vessel would anchor in the quarantine anchorage, where port Health Officer would board. Once clear at the first port in New Zealand no further pratique is required.
RADIO: Port is equipped with medium frequency and VHF, call sign "Picton Harbour Radio", calling frequency 2182 kc/s. Watch is maintained Monday to Friday, 0900 to 0933, 1140 to 1203, 1540 to 1603 hrs. daily and at other times by arrangement. In addition the following schedule is maintained for communication with the

road/rail ferries: 0103, 1140, 1640, 2020, 2050 hrs. Sundays only: 1603 hrs.

TUGS: None.

BERTHING: One overseas wharf 240 m. length with accommodation for two vessels. Depth at wharf up to 11.58 m.

2 road/rail ferry berths 152 m. long with modern terminal facilities for roll-on/roll-off traffic.

STEVEDORES: Agents will provide gangs and other facilities provided Master gives prior notice of his requirements.

MEDICAL: It is necessary for Master to give his Agent as much advance notice as possible. Two doctors reside in the port. Hospital at the port and the main hospital at Blenheim, 35 km. by road. Ambulance service available.

DENSITY: 1025.

FRESH WATER: Supplies available at 30 t.p.h. Cost 75 cents/1,000 gals.

FUEL: By tank wagon only.

GANGWAY/DECK WATCHMEN: Required by general harbour regulations and is generally carried out by ship's deck hands.

OPENING/CLOSING HATCHES: Performed by stevedores.

CUSTOMS ALLOWANCES: See "Auckland".

CARGO GEAR: Marine Department control this and regulations are issued accordingly. These regulations are very similar to those in the United Kingdom.

IDENTIFICATION CARDS: Not required.

CONSULS: These are stationed at Wellington. (See "Wellington".)

REPAIRS: Small repairs undertaken by three companies.

REPATRIATION: Crew changes can be made.

AIRPORT: Woodbourne -22 miles by road from Picton, served by feeder services to Wellington – Christchurch. Local seaplane service from Picton Harbour.

TIME: GMT plus 12 hours, Daylight saving time, plus 1 hour, in force from October to March.

HOLIDAYS: New Year's Day, Anniversary Day, Good Friday, Easter Monday, Labour Day, Sovereign's Birthday, Christmas Day, Boxing Day, Anzac Day, Watersiders' Workers Picnic Day, New Zealand Day.

POLICE/AMBULANCE/FIRE: Police, tel. 439; Ambulance, through doctor or in case of emergency tel. 207; Fire, ring exchange operator.

TELEPHONE: Facilities exist to place telephones on board.

SHORE LEAVE: Allowed.

AUTHORITY: Marlborough Harbour Board.

TAURANGA (Mount Maunganui):

37.39 S. 176.11 E. **(See Plan Book)**

PORT LIMITS: An arc of a circle of 2 nautical miles radius running from the landward boundary of the foreshore on Matakana Island, and thence into the Bay of Plenty to a position intersection of a right line with North Rock Light, bearing 273°; thence to North Rock Light; thence in a 180° direction to the landward boundary of the foreshore, and having as its centre, trig. station A, Mount Maunganui, Block 6 Tauranga Survey District.

DOCUMENTS:

3 Crew Lists
3 Passenger Lists
1 Search List (on regulation form)
1 Bonded Store
1 Gift List
1 Inward Report Check List (C. Form 98)
1 Declaration by Master of Restricted Immigrants
1 M.O.T. Declaration of Safety Certificate
1 Maritime Declaration of Health
1 Cargo Manifest (for each Port of discharge)
1 De-Rat
1 Clearance, Last Port
1 Poisons on Board
1 Firearms on Board
1 Ship's Papers

PILOTAGE: Pilotage is compulsory for merchant vessels of over 100 tons net tonnage; Pilot boards vessel about 2 miles N.E. of North Rock light structure. If due to adverse weather conditions, the Pilot is unable to embark, the pilot launch may, in certain circumstances, lead the vessel into smoother waters and embark abreast No. 2 light buoy. All vessels inward bound must give 24 hours notice by radio of their expected time of arrival off the port limits. If bound from Auckland or near ports, vessels send their expected time of arrival immediately on departure from that port.

A second message confirming or amending the first is to be sent 4 hours before the ETA. Should, however, the vessel expect to arrive later than her 24-hour message, her 4-hour message shall be sent 4 hours before the ETA given in her original message.

All communications, which should be addressed to "Harbour Master, Tauranga", will be attended to at all hours of the day or night.

The pilot launch, which is 15 m. in length, is painted white and equipped with R/T 2182 kHz, 2162 kHz, and 2012 kHz, VHF Channels 16, 14, 12, 8 and 6, and radar.

Vessels awaiting to enter Port may find suitable anchorage in 12 fathoms, 2 miles N.E. of Mount Maunganui. The holding in sand and shell is good in all but extreme conditions.

ANCHORAGES: 3 sheltered anchorages are situated in the Western Channel of Tauranga Harbour, these include the Quarantine and Explosive Anchorage, and are available for vessels of 152 m, and a maximum draft of 6.86 m. (H.W.).

RESTRICTIONS: Vessels may enter, berth, unberth, or depart during hours of darkness in fine weather, Tankers are handled during daylight only except tankers in ballast and gas free which may sail at night. Vessels over 95 m. generally enter or depart on HW or LW slack.

MAX. SIZE: Max. length permissible is 225 m. (229 m. at Harbour Master's discretion), no restrictions on beam. Max. arrival and departure draft at high water is 10.7 m. and at low water 9.20 m.

HEALTH: Radio notification to be sent to "Port Health Tauranga", ragarding state of health of crew and ETA 24 hours before arrival.

Pratique is granted by Port Health Officer on arrival. Notification should be made by radio to Port Health in case of suspected disease or fever on board.

Pratique is automatic if vessel has been previously cleared at another New Zealand port. Radio pratique may be granted isn case of passenger vessels or such vessels as carry a doctor on board.

RADIO: Nearest coastal radio station to Port of Tauranga is "Auckland Radio" – call sign ZLD.

The Harbour Board Watch Office, call sign "Tauranga Harbour Radio", is fitted with VHF and R/T; a continuous listening watch is maintained on Channel 16 and 2182 kHz.

RADAR/VHF: Radar is fitted to the pilot launch and 1 tug. VHF is fitted to both tugs and pilot launch. Channels 16, 14, 12, 8 and 6 available.

TUGS: 2 tugs are available, each with a bollard pull of approximately 28 and 15 tons. They usually join inward vessels in the vicinity of the Harbour entrance. Tug's lines are normally used, for which there is no extra charge.

BERTHING: Berthing normally takes place 30 minutes after negotiating harbour entrance at HW or LW slack. The quay type concrete wharf 1842 m. in length, (nominally eleven berths), is fitted with wooden spring piling and rubber buffers. A linkspan is situated in the centre of the wharf area.

STEVEDORES: ETA to stevedoring companies is usually worked in conjunction with ETA to Harbour Master.

MEDICAL: Unless specifically required for arrival, Agents do not require advice. Local medical practitioners are consulted and services of one public and one private hospital are utilised. Smallpox certificates are required.

TANKERS: Discharge of black and white products is done through a single 2540 mm. pipe-line. The flexible connection between the discharge lines and ship is 2030 mm. There are no slop facilities available. Chemical tankers are loaded and discharged at the same berth, No. 9, where the max. permissible draft is 9.75 m.

DENSITY: Salt water, 1025.

FRESH WATER: Fresh water is supplied by pipe-line at 20 tonnes per hour, prior arrangements must be made with the Harbour Master for quantities in excess of 1,000 tonnes.

FUEL: Bunkering connections are placed at Nos. 1, 2, 3, 4, 5, 6 and 9 berths. Quantities of L.F.O., 200 secs, Redwood No. 1 and H.F.O. 1,000 secs, Redwood No. 1 can be supplied by prior arrangement with the Oil Companies.

FIRE PRECAUTIONS: In addition to the normal precautions, a fence is erected around tankers to prevent unauthorised access to the berth. A Watchman from the Harbour Master's Staff is also placed on duty at the gate. Both tugs are equipped for fire-fighting.

DEVELOPMENTS: An increase of draft to 10.67 m. is planned for in the near future.

GANGWAY/DECK WATCHMEN: Ship's watchmen are usually employed by overseas ships.

OPENING/CLOSING HATCHES: Usually performed by stevedores.

CUSTOMS ALLOWANCES: 200 cigarettes or 250 grams tobacco. 1 part bottle of spirits or wine.

IDENTIFICATION CARDS: Not required.

REPAIRS: All types of engine and deck repairs are possible. A slipway can take vessels of 610 tonnes displacement and up to 56 m. length.

REPATRIATION: All facilities exist.

AIRPORT: The airport is situated 1.6 km. from the wharf and is served with regular internal flights to other main centres where overseas flights may be connected with.

TIME: GMT plus 12 hours.

HOLIDAYS: New Year's Day; 2 January; Picnic Day and Anniversary Day, both in latter part of January; Waitangi Day, 6 February; Good Friday; Easter Monday; Anzac Day, 25 April; Queen's Birthday, 1 June; Labour Day, 26 October; Christmas Day and Boxing Day (12 days).

POLICE/AMBULANCE/FIRE: All connected through automatic exchange, Emergency No. 111.

TELEPHONES: Telephones are placed on board all ships when they arrive.

SERVICES: Local compass adjusters and Surveyors are available. Ships stores can be provided by local Providore firms. Fumigation can be arranged. Ships' garbage is collected daily. No facilities for discharge of tank washings exist.

SHORE LEAVE: Crew are permitted ashore at Master's discretion.

AUTHORITY: Bay of Plenty Harbour Board. Mount Maunganui.

AGENT: Russell & Somers (Bay of Plenty) Limited, 194 Maunganui Road, POB 5087, Mount Maunganui. Tel. 53059. Telex: 2942 "Lumberco". Cables: "Rusticated" Mount Maunganui.

TIMARU: 44.24 S. 171.19 E. (See Plan Book)

DOCUMENTS: See "Auckland".

PILOTAGE: Pilotage is compulsory, and Pilots are available day and night. A vessel requiring a Pilot should remain 1.5 miles seaward of Eastern Extension Mole, near and to South of entrance beacon. Vessels should not proceed Northward of line of leading lights on Benvenue Cliff.

ANCHORAGES: A vessel should anchor in a depth of not less than 12.8 m., sand, and Eastward of harbour light structure, and not within 1.5 miles of Eastern Extension Mole.

RESTRICTIONS: Tidal conditions may affect the time of entering harbour.

MAX. SIZE: Length, 198 m. O.A. 227 m. if fitted with bow and stern thrusters; beam, No limit; Max. permissible draft 9.1 m. HWOST. Time of berthing vessels of over 6.4 m. draft will depend on tidal conditions and at Harbour Master's discretion.

HEALTH: Due to exposed nature of anchorage, incoming vessels are examined and pratique is granted after a vessel berths. In event that vessel is quarantined, she will be required to return to anchorage without any contact being made with shore.

RADIO: Timaru Harbour Board has a radio telephone station equipped with both medium frequency and VHF installations.

Call sign "Timaru Harbour Radio", calling frequency 2182 kc/s., working frequency 2162 kc/s. Fixed watches maintained for a period of 15 minutes every 4 hours, e.g.: 0345–0400, 0745–0800, 1145–1200, 1545–1600, 1945–2000, 2345–2400 hrs. (New Zealand Standard Time) and at other times mutually arranged. VHF call sign is "Timaru Harbour", Channels 6, 12, 16.

TUGS: 1 tug, 1100 h.p. and Pilot launch/tug, 200 h.p. available.

BERTHING: Berthing space available, 947 m. with 9.75 m. at LWOST, 197 m. with 9.29 m. at LWOST. and 378 m. with 8.48 m. at LWOST. Loading and unloading by ship's gear; railway lines on all wharves. Rail to Christchurch and Dunedin.

SPECIALISED CARGO-HANDLING FACILITIES: *All weather mechanical loaders:* 4 all-weather mechanical meat loaders. Each machine is capable of loading 720 units per hour, to a max. of 2,500 units per hour. Also butter, cheese, frozen vegetables can be handled. Can be used to unload suitable cargoes e.g. fruit.

Roll-on/Roll-off facilities available for coastal vessels.

BULK HANDLING FACILITIES: Two silos with total holding capacity of 2,200 tonnes. Loading rate, 300 tonnes/hr. into vessel; into silo 120 tonnes/hr. A modern bulk handling installation with 7 silos providing storage for 8,500 tonnes of lucerne or 9,500 tonnes of grain. Loading in rates by road and/or rail transport, up to 300 tonnes per hour. Ship loading rates, lucerne 680 tonnes per hour, grain 800 tonnes per hour. Inert gas protection provided for lucerne. Wharf conveyor has maximum belt rate of 1,000 tonnes per hour. Plant able to handle lucerne, all grains and certain types of minerals.

Fertilisers and Sulphurs discharged through 6 mobile hoppers 27 cu.m. capacity each.

CRANES: One 20 tonne mobile crane, one 20 tonne crawler crane, one 6.7 ton crawler crane.

STEVEDORES: Gangs must be ordered before 0700 hrs. weekdays, and before 0900 hrs. Friday for Saturday work.

MEDICAL: Full medical facilities are available as required, including an excellent public hospital.

TANKERS: 1 tanker berth, discharge through 8-in. hoses.

DENSITY: Specific gravity 1025 at all states of tide.

FRESH WATER: Available at all berths, delivered at up to 25 t.p.h.

FUEL: Bunkers available, heavy and medium fuel oil. 24 hours advance notice required.

FIRE PRECAUTIONS: When tankers are discharging, access to wharf is prohibited except to those holding passes. Fire-fighting equipment is placed in readiness on wharf.

GANGWAY/DECK WATCHMEN: Available if required.

OPENING/CLOSING HATCHES: Carried out by stevedores.

CUSTOMS ALLOWANCES: See "Auckland".

IDENTIFICATION CARDS: Not required.

SURVEYORS: Lloyd's Surveyor – Captain A. Grieve.

REPAIRS: Most deck and engine repairs can be undertaken.

REPATRIATION: Facilities exist for effecting crew changes and arranging necessary repatriations.

AIRPORT: Two flights each day to and from Wellington. Christchurch International Airport is 160 km. north of Timaru.

TIME: Approximately March–October New Zealand Standard Time (GMT plus 12). Approximately November–February New Zealand Daylight Saving Time (GMT plus 13). Actual dates of changeover to and from Daylight Saving Time decided annually.

HOLIDAYS: New Year's Day; 2nd January; Picnic Day (port holiday Monday of the week in which 29th January falls); New Zealand Day, (6th February); Good Friday; Easter Monday; Anzac Day (25th April); Queen's Birthday (first Monday in June); Dominion Day (third Monday in September); Labour Day (last Monday in October); Christmas Eve (work ceases midday); Christmas Day; Boxing Day. Work can be arranged only by private negotiation on a voluntary basis.

POLICE/AMBULANCE/FIRE: Emergency No. 111 and ask operator for service required. Other than emergency calls: Police, 84-199 Timaru; Ambulance, 80-467 Timaru; Fire Brigade, 7089 Timaru.

TELEPHONES: Can be supplied to vessels at all berths.

SHORE LEAVE: Allowed.

DEVELOPMENTS: The depth in the entrance channel is being deepened to 9.75 m. LWOST. Container terminal due for completion in June 1978. Discharge and loading by ships equipment. Containers handled by crane/ships gear. Terminal in operation in June 1978. Suitable for multi purpose vessels. Container cleaning and inspection facilities available.

AUTHORITY: Timaru Harbour Board.

WANGANUI: 39.57 S. 175.00 E. (See Plan Book)

PORT LIMITS: Arc of a circle of 3 nautical miles radius centred at the flagstaff at Castlecliff, sited 39° 56′ 49″ S. 174° 59′ 23″ E.

DOCUMENTS: See "Auckland".

PILOTAGE: If Wanganui is first N.Z. port, initial application for Pilot and vessel's ETA should be passed to local Agent by radio through one of three Post Office radio stations. If not first N.Z. port, this information should be given to local Agent by Agent at previous port. Final details settled when R/T contact made between pilot station and ship.

Pilot launch "Karere", LOA, 41 ft. painted white, high midship wheelhouse. Pilot boards at anchorage position. International signals for Pilot should be used if no R/T contact made.

ANCHORAGES: One anchorage for vessels awaiting to enter.

RESTRICTIONS: Port worked day or night at high water when bar conditions are suitable.

MAX. SIZE: Length 350 ft., beam no limit, draft dependent on bar depths at particular time but usually 15 ft. max. at high water springs. No installations outside main port area.

HEALTH: See "Auckland".

RADIO: Wellington Radio ZLW. R/T frequencies 2182, 2162, 2012.

VHF: Channels 16 and 14.

TUGS: No tug available. Pilot launch used for swinging.

BERTHING: Berthing takes place at high water slack.

SPECIALISED CARGO-HANDLING FACILITIES: *No. 6 Berth:* pipeline for bulk cement connecting wharf with adjacent silos.

No. 1 Wharf: direct handling into cool store for fruit.

Portable hoppers used for bulk cargoes to load directly into railway wagons.

There are no facilities for containers, roll-on/roll-off traffic, liquid chemicals or LPG carriers.

CRANES: One mobile crane, capacity 4 tons.

STEVEDORES: Requirements for labour should be given with ETA and request for Pilot. At least 24 hours notice required.

MEDICAL: 24 hours notice required if possible. Hospital facilities available. Inoculations, certificates, etc.

DENSITY: 1020 at HW. 1005 at LW. These figures vary greatly according to amount of freshwater in river.

FRESH WATER: Plentiful supply through wharf hose connections. Rate of delivery depends on height of ship's filling pipe above wharf level.

FUEL: All grades available but ship has to pump out of road tankers. Amount of notice depends on grade required.

DEVELOPMENTS: Development plan in course of preparation but as yet no details of size of any possible new installations or draft increases.

GANGWAY/DECK WATCHMEN: Watchman necessary, either crew member or shore watchman.

OPENING/CLOSING HATCHES: Carried out by stevedores.

CUSTOMS ALLOWANCES: See "Auckland".

IDENTIFICATION CARDS: Not required.

REPAIRS: Minor deck and engine repairs possible.

REPATRIATION: Facilities exist but more easily accomplished at a main port.

AIRPORT: About 6 miles. Airport caters for internal services only.

TIME: N.Z. Standard Time (12 hours in advance of GMT). N.Z. Daylight time (13 hours in advance of GMT) is kept from last Sunday in October until first Sunday in March.

HOLIDAYS: As Auckland, except Anniversary Day holiday which is that held in Wellington Province. No cargo is worked on these days.

POLICE/AMBULANCE/FIRE: Ambulance, 53909; Police, 54488; Fire Brigade, Wanganui, 58505; Fire Brigade, Emergency 111.

TELEPHONES: Arrangements can be made for placing telephones on board.

SHORE LEAVE: Allowed.

DELAYS: Fresh onshore winds could make entrance unworkable for a vessel waiting to enter. Cargo work stops in rain and in unusually strong wind. Bunkering would be slow if large amount of bunkers required.

AUTHORITY: Wanganui Harbour Board.

WAVERLEY HARBOUR, North Island: 39.50 S. 174.37 E.

LOCATION: Waverley Harbour is located on the West coast of the North Island of New Zealand in the Northern end of the South Taranaki Bight.

PORT LIMITS: Waverley harbour is defined as being all that area of water bounded by the line of mean high water spring tides, and having as its seaward limit the arc of a circle of 2 nautical miles radius centred at 39° 49.6′ S. 174° 36.5 E, near the mouth of the Wairoa Stream.

DOCUMENTS: Besides the Port Health Doctor, other Government personnel boarding the vessel by helicopter for inward clearance are: 1 Port Health Officer, 1 Customs Department Officer, 1 Agriculture Department Officer.

Port Health Officer will inspect Deratisation Certificate and (possibly with Agriculture Officer) inspect food store rooms, refrigerated spaces, galley, pantry, etc.

Customs Officer: The Customs Boarding Officer acts for the Immigration Department and the Marine Department and will inspect the following ship's documents: Register, Loadline Certificates, Safety Equipment Certificates, Radio Certificates.

The following documentation is required on Inward Clearance:
1 copy Form 1A General Declaration
1 copy Form 1B Cargo Declaration
1 copy Form 1C Crew List
1 copy Form 1D Passenger List
1 copy Form 3A Ship's Stores List
1 copy Reg Form 2 Search List
1 copy Declaration re Safety Certificates
1 copy List of Poisons
1 copy List of Firearms

For Outward Clearance (Customs):
2 copies Form 1A General Declaration
2 copies Form 1B Cargo Declaration
2 copies Form 1C Crew List
2 copies Form 1D Passenger List
2 copies Form 3A Stores List
1 Passenger Arrival Card for any Crew or Passenger leaving vessel.

Agriculture Officer: on arrival:
2 copies of Ship's Meat Locker
Reg. 1966 Agl. 36.

The Boarding Officer will inspect the vessel's meat locker and inspect the garbage containers.

Australia, United States, Canada and New Zealand meat not loaded in the place of origin, and Japanese meat will be sealed up on vessel's arrival by the Agriculture Officer.

At sailing time, the Agriculture Officer may attend to check on garbage, sealed lockers, etc., together with the Customs Officer, who issues the Port Clearance, to check if all crew are aboard, and that the Bonded Stores Seal is intact.

NAVIGATION AIDS: SBM – radar reflector, white flashing light, one flash every 9 seconds, range 6 miles.

Leading Lights: In transit bearing 355° 33′.

Range Lights: In line bearing 312° 03′.

All four light towers are of louvred timber construction, painted white with vertical centre line painted red.

The pumphouse building immediately to the West of the two leading lights is prominent with a radar visibility to 15 miles.

PILOTAGE: Pilotage is compulsory for Waverley Harbour and under control of the Waverley Harbour Master.

It has become customary for vessels to await the Pilot in a position 2 miles South of the SBM. Vessels equipped with VHF will be contacted accordingly when within range. Information on weather conditions and time of Pilot boarding will be advised through this media.

Due to the nature of the coastline adjacent to Waverley Harbour and the weather conditions experienced, the transportation of the Pilot (and other port official personnel) is effected by helicopter, from a pad adjacent to the Administration building. It must be ensured that radio antennas running respectively from foremast to bridge and bridge to aft, as the case may be, are lowered clear in good time prior to the arrival of the helicopter and the landing area cleared of loose gear and portable foam fire equipment properly charged, available for immediate use at the landing area.

Berthing to the S.B.M. is normally effected in daylight only, dependent on weather conditions, visibility and flying conditions being acceptable to the helicopter pilot and in concurrence with the Master of the vessel.

For night flying a wind sock will be erected for the helicopter pilot's observation of wind direction, and vessel is to be floodlit overall.

ANCHORAGE: The recommended anchorage off the port is a rectangular area 0.75 miles East and West, and 1 mile North and South of a position 3 miles South of the SBM. The bottom is sandy in 11 to 12 fathoms and the holding ground is reported fair.

A safe anchorage for vessels having to leave the buoy and/or to await suitable weather to moor to the buoy is recommended in Golden Bay. Distance is approximately 90 miles S.W. of Waverley, the approaches are clear and the lights on Farewell Spit and Separation Point, of 15 miles and 12 miles respectively, most reliable. The holding ground is good and depth of water 15 to 16 fathoms.

WEATHER: The Harbour and SBM is exposed to the West through South to South-east. The swell conditions caused by Westerly and South-westerly weather are considerably reduced by the shallow ground to the Westward, but Southerly swell rolls in unhindered. Very sudden changes of weather are experienced on this coast with the rapid movements Eastward of cold fronts over the Tasman Sea.

PRATIQUE: Vessels arriving at Waverley on consecutive voyages Japan/New Zealand and with all personnel holding valid International Certificates for smallpox should radio to "Health, Wanganui" 24 hours before arrival Waverley, advising number of passengers and crew, and "All Healthy" in which case pratique is automatically granted without any acknowledgement to the vessel.

If a vessel has any suspected diseases on board and if any crew member does not hold a valid International Certificate for smallpox, this information should be stated in the radio message to "Health, Wanganui". The Port Health Doctor will then attend on board on arrival for inspection of all International Health Certificates, and carry out vaccinations as required.

The doctor will supply on arrival N.Z. Maritime Declaration of Health Form H-Q2 for completion by the vessel. It is customary to procure an additional form for the following voyage to facilitate easy inward health clearance thereafter.

RADIO: There is no Government Radio Station at Waverley. Vessels trading to Waverley use ZLD Auckland Radio, ZDB Awarua Radio, or ZLW Wellington Radio.

Advice of Arrival: Vessels to radio ETA to "Wavemarine" Waverley on departure from last port, and 48 hours and 24 hours prior to arrival.

In addition to the vessel's ETA to "Wavemarine", arrival draft and details of the hatch loading plans should be advised.

Vessels equipped with VHF should listen in on Channel 14 (156.7 mHz) when in range of Waverley Harbour.

Base Station is at the Shiploading Pump Station, on board the tender vessel *Otapiri* and a remote control unit is fitted in the main administration building. Mobile units are also employed during the loading operation.

Base Station Channels are:
Channel 6 – 156.3 mHz Intership.
Channel 9 – 156.45 mHz Private and Loading.
Channel 14 – 156.7 mHz Port Operations/Docking.
Channel 16 – 156.8 mHz Safety.

Meteorological information for shipping is broadcast by the Coast Radio Stations ZLW, ZLB and ZLD at frequent scheduled times. ZLW broadcast by radio telegraph on 417.5 kHz, ZLD 487.5 kHz.

BERTH DESCRIPTION: The single point mooring buoy of 11 m. diameter is moored in 57 ft. at low water, 1.5 miles from the shore in position 39° 51′ 02.2″ S. 174° 35′ 52.14″ E.

BERTHING: Vessels will be secured to the S.B.M. by a single 21 in. nylon hawser with chafing chains at each end.

When the carrier approaches the buoy, the tender vessel "Otapiri" will receive a 3 in. messenger rope from the carrier. "Otapiri" will then shackle the messenger to a 10 in. polypropylene pick-up rope. The carrier heaves the messenger and pick-up rope inboard until the chafing chain passes through the bull nose.

Dedicated ships secure the chafing chain to a quick release hook fitted for this purpose.

Ships without a quick release hook should advise "Wavemarine" by radio on departure from last port.

It is essential that two or three good heaving lines be available with the messenger rope in the first instance to pass to the tender vessel, to avoid any delays in mooring.

HOSES: The floating loading hose string comprises eleven 35-ft. lengths of hose, with the shipboard end supported by a steel buoy. After mooring is completed the tender vessel will tow around the floating hose underneath the pick-up derrick, plumbed over the manifold connection on the port side of the foredeck abaft the forecastle head. The pick-up buoy of the hose-end will have shackled into it a 30-ft. length of polypropylene, of 7 in. circumference, to which is attached a 100-ft. length of 2.25 in. circumference for passing to the vessel. The 7-in. polyprop is hove up to the rail and hooked into the vessel's cargo hook. The flange elbow with attached camlock coupling is then hove up and connected to the vessel's deck hose manifold. The hose is presently supported on the ship's derrick and stayed fore and aft after coupling up has been completed.

It has been estimated that after the iron sand slurry has been loaded, and the excess water decanted from the surface of the cargo, that the bulk density of the iron sand should be 190 lb. to the cubic foot.

LOADING: All compartments to be loaded should be clean with all drain sumps and double bottom butterworth hole filter places clear.

If weather conditions permit, the vessel should arrive with the after hatch lid of each hold open to facilitate visual inspections of the hold decanting eductors.

FRESH WATER/FUEL: Not available.

REPAIRS: Emergency repairs can be arranged, including radio.

MEDICAL: The Port Health Doctor is a qualified doctor of medicine and can be acquainted of any medical problems affecting any crew member; the necessary arrangements can then be made for treatment aboard or ashore, as convenient.

CUSTOMS ALLOWANCES: See "Auckland".

CONSULS: There are no consular representatives at the port of Waverley.

REPATRIATION: Lists of personal effects, accounts of wages, etc., of any vessels' personnel left ashore, hospitalised or deserted, should be available to Agent as early as possible.

A letter of authorisation is required if the Agent is to provide accommodation, meals, medical attention, transportation or travel expenses, and/or cash advances for account of vessel.

SHORE LEAVE: Shore leave for vessel's personnel is not practicable.

GENERAL: No Port Authority personnel remain on the vessel during the loading period at the SPM Buoy.

The Marine Department require that all vessels, while moored, "shall at all times be kept in readiness to proceed to sea".

The Pilot who is the loading master for Waipipi Iron Sands Limited will accept the Notice of Readiness for the vessel, and acts as Agent for all the vessels requirements. It is customary for the Pilot/Loading Master/Agent to be accommodated on board the vessel during her period on the buoy.

Whistle signals in an emergency may be used for medical, police, etc., as required.

Storing is accomplished by helicopter, cost of which is borne by the ship.

No garbage is to be thrown over the side of the vessel whilst she is on the New Zealand coast and moored to the buoy. Garbage must be retained on board and not dumped until the vessel is one day's steaming clear of the Northern point of New Zealand.

AUTHORITY: Waipipi Iron Sands Limited.

WELLINGTON: 41.18 S. 174.46 E. (See Plan Book)

PORT LIMITS: All the waters comprised within the harbour of Wellington having as their outward seaward limit the arc of a circle running from the landward boundary of the foreshore at Fitzroy Bay and thence into Cook Strait and thence to the landward boundary of the foreshore at Island Bay, such arc being an arc of a circle 3 nautical miles radius and having its centre at a point on the Outer Rock in the harbour of Wellington.

DOCUMENTS:

Port Health Authorities.

Maritime Declaration of Health (1 copy).

Crew List, stating name, rank, sex, nationality and date of smallpox vaccination. (1 copy).

Port Health Officer will also wish to sight each member of crew's smallpox Vaccination Certificate.

Current International Derating Exemption Certificate.

Customs Authorities. See "Auckland".

Agent.

Crew List, stating name, occupation, rank, sex and nationality (1 copy).

Freight Manifest (3 copies).

Note: Manifests should be airmailed by loading port to arrive in New Zealand at least one week prior to vessel's arrival.

Stowage Plan, airmailed same as Manifest (2 copies).

Agricultural Authorities.

Port Agriculture Inspection Instructions – Ship's Meat Locker Regulations 1966.

PILOTAGE: Compulsory, pilot vessel is not normally cn station outside entrance, and all vessels requiring a Pilot are required to give 24 hours notice by radio of their expected time of arrival off port limits. A second notice confirming or amending the first is to be sent 4 hours before expected time of arrival. In event of a ship expecting to arrive earlier than the time given in 24-hour message, 4-hour message shall be sent 4 hours before the new expected time of arrival. Should vessel expect to arrive later than her 24-hour message, her 4-hour message shall be sent 4 hours before expected time of arrival given in her original 24-hour message. All communications which should be addressed "Harbour Master, Wellington", will be attended to at all hours of the day or night.

Should it not be possible to give previous notice of arrival it may be up to 1.5 hours after a vessel is sighted by signal station on Beacon Hill before a Pilot can board.

Pilots normally embark or disembark South of Pencarrow Head, but in the event of heavy Southerly weather, it may be necessary to embark or disembark Pilot in smooth water at or near the compulsory limit.

ANCHORAGES: Depth in anchorages up to 60 ft.

Fairway. Within portion of harbour lying inshore and to Westward of a line drawn from Easternmost point of Oriental Bay, in a 344° direction, to Kaiwharawhara Shore.

Inner Anchorage. Within portion of harbour laying between the Eastern boundary of fairway anchorage and a line drawn from Point Jerningham, in a 354° direction to Kaiwharawhara Shore.

Outer Anchorage. Within portion of harbour Eastward of inner anchorage.

Note: Vessels anchoring in outer anchorage should take up a position well up towards Kaiwharawhara.

Explosives Anchorage: Within that portion of the harbour contained in a circle with a radius of 0.3 nautical miles having as its centre a point bearing 000° true, distant 1.45 nautical miles from Point Halswell Light Beacon or in such other place within the Harbour of Wellington as may be specified by the Harbour Master on any occasion having regard to weather conditions.

Caution: It is advisable when anchoring (especially when in light draft) to drop two anchors in an Easterly and Westerly direction, veering from 75 to 90 fathoms of cable, as it frequently blows hard with heavy gusts of wind off the high land that surrounds harbour, causing a vessel to sheer about. In very strong winds a ship will lie much easier by having both anchors down. A strict watch should be kept.

Prohibited Anchorages. Anchorage is prohibited within 500 ft. of the jetty situated on the N.E. side of Somes Island.

RESTRICTIONS: Controlling channel depth is 37 ft. 09 in. below chart datum. All vessels may enter, berth, unberth, or depart during the hours of darkness. Tankers do not usually berth or depart during the hours of darkness. Berthing is carried out at any state of the tide.

Tides: Rise of tide varies between 0.75 m. and 1.35 m. Tidal rate neaps 2 knots, springs 2.5 knots.

MAX. SIZE: Max. draft 33 ft. LW with no swell. Size no limit.

HEALTH: *Health Officer's Examination Ground.* Within that portion of the harbour contained in a circle with a radius of 0.2 nautical miles, having as its centre a point bearing 347° (true), distant 0.56 nautical miles from Point Jerningham Light Beacon or in such other place within the Harbour of Wellington as may be specified by the Harbour Master on any occasion having regard to weather conditions. Until pratique has been granted vessels arriving from ports beyond New Zealand must not proceed inwards beyond the limits of this area.

RADIO: Medium frequency; Call sign is Wellington Harbour Radio, calling frequency only 2182 kHz, working frequency 2012 kHz. Vessels working on the port and calling 2182 kHz should listen for reply on 2012 kHz. A continuous watch is maintained on 2182 kHz.

VHF: Call sign "Wellington Harbour Radio", on Channel 16. Working Channel 12 and Channel 14. A continuous watch is maintained on Channel 16.

Port operations. Vessels equipped with radio-telephone when within harbour limits must maintain a listening watch on 2182 kHz or Channel 16 to ensure immediate contact if required. Only calls for information on harbour conditions, berthing or safety of navigation will be accepted.

Vessels are notified of their berth by radio telephone (VHF or MF) or morse lamp from Beacon Hill (viz Wellington Harbour Control). On occasions this may be confirmed by Pipitea Tower.

Note: Beacon Hill and Pipitea Wharf signal stations, pilot launches and tugs are equipped with both medium frequency and VHF radio-telephone. Harbour Master's Office and all Pilots are equipped with VHF radio-telephone.

TUGS: The Harbour Master may direct the Master of any vessel to engage the services of a tug, and also direct the manner in which the tug shall be used. 3 × 2,700 b.h.p. Voith Schneider tugs, guaranteed bollard pull 28/31 tons, speed 12 knots, also equipped for fire fighting and salvage duties. The tugs are owned by Wellington Harbour Board.

BERTHING:

	Berth No.	Length of wharf metres	Maximum length of vessel metres	Maximum draft metres
Overseas Passenger Terminal	2	238	213	10.3
Overseas Passenger Terminal	3	259	244	10.3
Taranaki Street Breastwork	—	233	152	7.0
* Taranaki Street Terminal	—	152	152	8.2
Queen's	1	224	No limit	8.2
,,	2	93	85	7.3
,,	3	92	85	5.8
,,	4	114	122	7.0
,,	5	79	76	5.5
Waterloo	2	114	107	6.7
,,	3	107	122	6.7
†Inter Island	2	150	143	7.9
,, ,,	3	213	183	8.5
Glasgow	1	84	67	4.9
,,	2	218	213	9.8
,,	3	240	229	10.1
King's	1	91	67	4.9
,,	2	251	244	10.1
,,	3	240	229	10.1
Thorndon Container	1	292	No limit	11.3
Thorndon Container	2	292	No limit	11.3
Aotea Quay	—	1,122	No limit	10.7
‡Rail/Road Ferry Terminal	1	143	142	9.8
Rail/Road Jetty	—	68	61	6.4
‡2nd Rail/Road Ferry Terminal	2	147	142	10.1
Petone	—	111	107	4.3
Point Howard	—	158	182	10.0
Seaview Wharf	1	254.3	213.4 (At present)	12.8
Burnham	—	256	No limit	9.1
Miramar East	—	140	122	7.0
Miramar West	—	165	170	8.2

*Linkspan variable width 5 flaps to 20 ft. max.

†Linkspan.

‡Linkspan facilities served by rail.

DEVELOPMENTS: Containers:

Thorndon Container Wharf situated South of Aotea Quay breastwork has a quay length of 584 m. for two berths, depths at low water 12.5 m. Three container gantry cranes, one transfer terminal container crane, eighteen straddle carriers, five fork lifts, one travel lift, six 20 ton container trailers and thirteen battery fork lifts for vanning operations.

The Wellington Container Terminal area for handling up to 100,000, 20 ft. containers annually will be 60 acres (24.3 hectares) comprising 40 acres (16.2 hectares) operating and marshalling area, 10 acres (4 hectares) rail and road access 9 acres (3.6 hectares) depot working buildings etc. 1 acre (0.4 hectare wash area).

Container stacking: General cargo 2,309, reefer 1,376, empties 1,824, total 5,500 two high.

Tankers: Seaview Wharf under construction is an oil tanker wharf 97.5 m. in length, berthing dolphins 190 m. apart, mooring dolphins 213 m. apart, size of vessel 213 m. maximum, designed for vessel draft of 12.8 m. (See harbour entrance max. draft).

Kaiwharawhara: Future reclamation for bulk handling container and roll-on berths.

TANKERS: Tankers can berth alongside Point Howard Wharf, Aotea Quay, Burnham and Miramar Wharves. Side connections are to be used at all wharves. During hours of darkness pipe-line must not be disconnected without first obtaining permission from Harbour Master. All precautions must be taken to avoid oil pollution of harbour. Scuppers must be plugged and sawdust kept at hand in case of spillage.

Point Howard and Seaview wharves are exposed to weather and in the event of a Southerly gale special attention must be paid to vessel's moorings.

No facilities are provided for discharge of tank washings other than when a vessel is on the floating dock.

Details of pipe-lines serving these wharves are as follows: Miramar Wharf, one 8 in. pipe, one 12 in. pipe; Point Howard Wharf, two 10 in. pipes, one 6 in. pipe, four 8 in. pipes, one 9 in. pipe, two 4 in. pipes (chem. products); Aotea Quay, one 8 in. pipe, one 12 in. pipe; Burnham Wharf, one 12 in. (jet fuel).

DENSITY: 1025.

FUEL: Available at tanker discharging wharves.

FRESH WATER: Available at all wharves, delivered by hose (4 hoses per vessel max.), 50 t.p.h.

DRY DOCKS: *Floating dock.* A floating dock capable of lifting vessel of 17,272 tonnes displacement is available.

Slipway: Patent slipway available to accommodate vessel up to 508 tonnes.

Floating Crane. Harbour board has an 80-ton revolving and self-propelling floating steam crane of sufficient radius and height to serve the largest vessels when floating in light draft conditions.

REPAIRS: Major repairs can be undertaken. There are machine shops and foundries. Diving equipment and the services of trained divers are available for underwater inspections and repairs. Marine Radio and Radar Services, compass adjusters.

GANGWAY/DECK WATCHMEN: Shore watchmen available.

OPENING/CLOSING HATCHES: Work normally carried out by stevedores. Only time crew are to open and close top hatches is when advised by stevedore. In case of hydraulic hatches in tweendecks, crew are to open and close, not stevedores.

STEVEDORES: Available. No particular ETA advice required except as normally sent by Master.

MEDICAL: 4 hour's notice is sufficient for Agent to mobilise the service concerned. For minor attention it is sufficient that Master advises Agent on arrival. Hospital facilities are available. Current International Certificates of Vaccination against smallpox are required by the Authorities.

CERTIFICATES: Customs Department require ship's Register on arrival. Marine Department require:

- Load Line Certificate.
- Tonnage Certificate.
- Certificate of Registry.
- Convention Certificates, i.e.
  - Safety Equipment Certificate.
  - Safety Radio-telegraphy Certificate.
  - Safety Construction Certificate.
  - Exemption Certificate (if any).
  - If passenger ship, Passenger and Safety Certificate.
  - Cargo Gear Register.
  - Certificates for all Cargo Gear, i.e. runners, spans, shackles, swivels, etc.
- Deratification Certificate.

CUSTOMS ALLOWANCES: See "Auckland".

IDENTIFICATION CARDS: Not required.

CONSULS: Arab Republic of Egypt, Argentina, Australia, Austria, Belgium, Great Britain, Canada, Chile, People's Republic of China, Czechoslovakia, Denmark, Ecuador, Finland, France, Federal Republic of Germany, Greece, Iceland, India, Indonesia, Ireland, Italy, Japan, Republic of Korea, Malaysia, Mexico, Netherlands, Norway, Papua New Guinea, Philippines, Singapore, Poland, Portugal, Romania, South Africa, Switzerland, Thailand, U.S.A., U.S.S.R., and Yugoslavia.

REPATRIATION: Facilities are available for crew changes and arranging any necessary repatriations.

SHORE LEAVE: Crew members are allowed shore leave at all times.

AIRPORT: Situated 4.5 miles S.E. of City Wharves by road; regular internal and Australian services.

TIME: Local time is GMT plus 12 hours in Winter, (Daylight saving during Summer months).

HOLIDAYS: New Year's Day (1st January); 2nd January; Wellington Province Anniversary Day (22nd January); Waterside Workers Union Picnic Day (generally observed on Monday of the week 29th January falls); New Zealand Day, (6th February); Good Friday; Easter Monday; Anzac Day (25th April); Sovereign's Birthday Observance (first Monday in June); Labour Day (fourth Monday in October); Christmas Day (25th December); Boxing Day (26th December).

Note: Pilotage services available public holidays. Container vessels at container berths work on public holidays.

POLICE/AMBULANCE/FIRE:

	Routine	*Emergency*
Wharf Police	723-000	Dial 111 and ask operator for service required
Ambulance	722-999	
Fire Brigade	850-188	

TELEPHONES: Vessels may be connected to telephone system at city berths by application to the Harbour Master.

GENERAL Garbage may only be disposed of in accordance with strict Government regulations. The normal method of disposal is overside to self-propelled garbage vessel in special cans supplied. Daily collections are made or as arranged through the Harbour Master.

SERVICES: *Shore Electricity:* Available at all berths. Type AC, voltage 230-400, cycles 50, amperage 60.

AUTHORITY: Wellington Harbour Board.

WHANGAREI: 35.45 S. 174.21 E. (See Plan Book)

PORT LIMITS: From a point due South of the summit of Sentinel Rock, thence to a point 5 cables due East of Sentinel Rock, thence to a point 5 cables due East of Bream Head, thence to a point 5 cables due East of Tutukaka Head, thence to Tutukaka Head.

DOCUMENTS:

- 3 copies Passenger List.
- 3 copies Crew List.
- 1 copy Search List (Form 2).
- 1 copy Stores List (Form 3).
- 1 copy Prohibited and Restricted Immigrants.
- 1 copy Poisons List.
- 1 copy Animals and Birds List.
- 1 copy List of Firearms (not cargo).
- 1 copy Arrival Manifest (Form 1).
- 1 copy List showing the gross tonnage of cargo for discharge in New Zealand.

PILOTAGE: Compulsory. Pilots embark on the line of leads 141°/321° at the seaward extremity of Pilotage District, i.e. up to 1.5 miles South-eastward of the Fairway Buoy. In heavy Easterly weather, it may be necessary for pilot vessel to lead ship in through the Outer Channel and embark in the lee of Frenchman Island.

Pilots are available all hours day and night subject to prior minimum notice of 24 hours being received during normal week-day working hours. Second notice confirming or amending first to be sent 4 hours before expected arrival. The Pilot supplies a set of Harbour bylaws. Pratique, agriculture and customs clearance is normally undertaken on arrival at berth.

Pilot boat is equipped with VHF. Working frequency is Channel 12, but Channels 6, 8 and 16 are also fitted. Pilot vessel *Manaia* – call sign ZM3830; pilot vessel *Ngapuhi* – call sign ZM2146. Range approximately 20 miles. *Manaia* painted blue, varnished housing, yellow funnel: *Ngapuhi* painted blue, white housing, yellow capping rails – pilot ladder with manropes required.

ANCHORAGE: Is situated 5 to 10 cables. Eastward of the Fairway Buoy in 12 to 20 fathoms of water in the section enclosed by the Fairway Buoy bearing 225° T to 315° T. Holding ground good in fine sand, but exposed to Easterly weather.

Harbour Anchorage. At Marsden Point, 2 cables West of Passage Island light, in 5 fathoms of water. Max. draft 24 ft. Good holding ground, sand and shell bottom.

RESTRICTIONS: Controlling depth in entrance channel 50 ft. MLWS. Depth in upper harbour channel maintained at 28 ft. MLWS.

MAX. SIZE: Marsden Point: Oil Refinery dolphin berths, LOA no restriction, draft 50 ft., Cargo berth LOA 600 ft., draft 28 ft.

Port Whangarei: LOA 600 ft., draft 31 ft.

HEALTH: All vessels examined by Health Officer on arrival.

RADIO: The station is Marsden Point, Whangarei. Call sign "Whangarei Harbour Radio" Continuous 24-hour watch is maintained on VHF Channels 16 and 12, range 40 miles. Medium frequency, listening watch on 2182 kc/s., working frequency range 200 miles. Station transmits on 2012, 2045, 2162 and 4139 kHz.

RADAR: Tugs and pilot boat *Manaia* fitted with radar.

TUGS: Available. Tugs equipped with VHF. Tugs usually secure to vessels entering in vicinity of Frenchman Island. Numbers of tugs normally used are 1 tug for vessels up to 25,000 tons d.w.t., 2 tugs for vessels up to 45,000 tons d.w.t., 3 tugs for vessels up to 65,000 d.w.t. 4 tugs over 65,000 d.w.t. Unberthing: 1 tug is normally required for vessels under 25,000 d.w.t., and 2 tugs for all other vessels, subject weather conditions.

BERTHING: Marsden Point Oil Berths (2) – operated by the New Zealand Refining Company, Marsden Point. LOA no restriction, max. draft 50 ft.

Marsden Point Cargo Berth (1), LOA 600 ft., max. draft 28 ft.

Port Whangarei berths (3), LOA 600 ft., max. draft 31 ft.

1 Berth LOA 400 ft., max. draft 20 ft.

Portland berths (3), bulk cement berth LOA 270 ft., max. draft 18.5 ft.; cargo berth LOA 350 ft., max. draft 18.5 ft.

SPECIALISED CARGO HANDLING FACILITIES: Portland bulk cement loading jetty. Port Whangarei, 7 portable hoppers for use discharge of bulk cargoes. Cargon system of butter loading.

STEVEDORES: Confirmation of arrival time 4 hours before ETA or revised ETA, whichever is earlier is required. Notice of arrival during a week-end or public holiday must be given not later than 1400 hrs. on the last working day preceding arrival.

MEDICAL: Hospital and dental services available.

TANKERS: Are berthed at all hours day and night. Vessels of 30,000 tons d.w.t. and upwards are usually berthed portside to berth at slack water, and should position ship's gangway 20 ft. upstream of hose connections prior to arrival.

Slop reception facilities are available. Diameter of load and discharge line 10 in. ASA.

DENSITY: 1025.

FRESH WATER: At Northland Harbour board wharves by hose 20 t.p.h. at 30 cents per 1,000 litres. Refinery jetties limited and arranged by refinery.

FUEL: Available from berths (viscosities 3,500 secs. red 1. 1,500 secs. red 1 and MDO).

OPENING/CLOSING HATCHES: Usually carried out by stevedores.

CUSTOMS ALLOWANCE: Tobacco: 200 cigarettes or 0.5 lb. tobacco or 50 cigars permitted each crew member. Wine/spirit: one opened bottle wine/spirits for each crew member.

A New Zealand flag ship arriving from overseas may have a concessionary allowance.

IDENTIFICATION CARDS: Refinery passes are required when berthed at the Refinery wharves. Passes are brought on board by Agent.

CONSULS: None.

REPAIRS: Most repairs undertaken.

DRY DOCKS: None. 1 slipway capable of receiving vessels up to 1,500 tons d.w.t.

REPATRIATION: Facilities exist.

TIME: GMT plus 12 hours. Daylight saving time observed from early October to early March.

HOLIDAYS: The following are recognised holidays: New Year's Day; 2nd January; Anniversary Day (usually last week January); New Zealand Day (6th February); Good Friday; Easter Monday; Anzac Day (25th April); Sovereign's Birthday (First Monday in June); Labour Day (fourth Monday in October); Christmas Day; Boxing Day; Waterside Workers Picnic Day.

POLICE/AMBULANCE/FIRE: Telephone 111 for emergency, and ask for service required.

TELEPHONES: Available at wharves.

SHORE LEAVE: Allowed.

FIRE PRECAUTIONS: Fire fighting tug on duty 24 hours a day. Tankers to have fire wires fore and aft.

SURVEYORS: Lloyds – New Zealand Government, Marine Division of the Ministry of Transport.

AIRPORT: 8 miles from Port Whangarei; regular daily internal flights.

SERVICES: Tank cleaning, radio and radar repairs. Compass adjuster from Auckland.

REGULATIONS: Issued by Pilot on arrival.

DELAYS: Tidal delays and berth vacancies.

AUTHORITY: Northland Harbour Board.

NOTES

Please also advise Shipping Guides Ltd.

Nicaragua

CORINTO: 12.30 N. 87.11 W. (See Plan Book)

ARRIVED SHIP: Vessels are considered as arrived only after having negotiated the entrance channel and are safely inside the proper harbour; vessels at the Pilot station are not considered as having arrived.

DOCUMENTS:
For the official clearance, the following authorities will board the vessel:

The Port Captain
The Public Health Delegate
The Delegate from the Ministry of Agriculture and Livestock
A representative of the Port Authority
Two Customs Officers
A representative of the steamship agency.

Each vessel must present documents legalised by the Nicaraguan Consul from the port of origin of the cargo as well as from the last port of call before Corinto. The documents required are the following:

	Legalised	Non-legalised
From the port of origin of the cargo:		
Cargo Manifest	3	18
Bills of Lading	—	2
Tally Books	—	14
From the last port of call:		
Manifest	3	18
Clearance	1	—
Crew List	—	6
Passenger List	3	6
Stores List	—	6
Health Declaration	—	1
Voyage Memorandum	3	10

In the cases where there is no Nicaraguan Consul at the port of origin of the cargo or at the last port of call, the documents may be legalised by the Consul of a friendly nation or can be certified by some competent authority of the port certifying that there is no Nicaraguan Consul in said port. When a vessel brings cargo for Corinto from the last port of call, then it must also bring both sets of documents mentioned above, the manifest in the second group being replaced by the Cargo Manifest.

Once these documents are satisfactorily received, the vessel is declared in "free pratique" or rather, officially cleared and numbered by the Port Authorities; it will then blow.

Vessels are cleared, numbered and attended in their successive order of arrival with the exception of vessels loading perishable cargó (bananas). In Corinto there is no preferential treatment given to these vessels since they operate on their own special berth.

To clear the vessel for sailing, the only requirement is the presentation of a Customs Solvency Certificate and the Clearance for the next port of call extended by the Port Captain.

Customs: Customs assigns two Customs Guards to each vessel docked or anchored, the vessel being under the obligation to provide these guards three meals daily. Besides meals, guards on anchored vessels must be given a cabin since watches are made in shifts.

PILOTAGE: The Port Authority must receive in writing from Agents advice regarding vessels ETA 72 hours prior to vessels arrival and a confirmation 12 hours. There is no VHF apparatus in use, therefore all advice must be sent through Agents by cable via Balboa or Limon station. Pilotage is compulsory on all vessels exceeding 500 gross registered tons or exceeding 7 ft. draft. Pilot boards 1 mile off Isla de El Cardon.

ANCHORAGE: The anchorage inside the harbour can accommodate 6–10 vessels, depending on size and draft.

RESTRICTIONS: The port is open 24 hrs.; however, entry is restricted in accordance with tide and vessels draft. Access channel and turning basin dredged to 13.35 m. Due allowance should be made for heavy swell if necessary. Speed limit 8 knots in Corinto Bay, and 5 knots in the vicinity of berths or other craft.

MAX. SIZE: Maximum permissible length 650 ft., 80 ft. beam. Draft controlled by depth of water in approach channel and state of swell.

HEALTH: After entry and vessel has berthed or anchored, 3 long blasts are given requesting free pratique; after these blasts the Authorities board the vessel together with the Agent's representative and proceed with distribution of the documentation. In the event of any suspected disease on board, the action to be taken will be given by the Representative of the Health Department. There is no automatic pratique even though vessel is proceeding from another port in the same country.

Although the port is open 24 hours, vessels arriving after 2100 hrs. are not boarded by the authorities until 0600 hrs. the following day, unless the vessel will berth and commence operations immediately. This being the case, free pratique is granted regardless of the hour. This arrangement is restricted to 0100 hrs. as gangs are not allowed to commence operations after that hour.

RADIO: ETA cables are generally routed via NBA Balboa Station or TIM Limon station, and received through Tropical Radio & Telegraph or All America Cable.

VHF: The Port Authority will soon have in operation, a VHF station to communicate directly with all vessels nearing the port. This radio station will become operative sometime during this year (1978).

TUGS: Compulsory for berthing and unberthing. The tug joins vessel just after vessel passes Buoy No. 7. Tug's lines are generally used: however, at times ship's lines are used. There is no charge for use of tug's lines. 1 tug of 1,100 h.p. and one launch of 167 h.p. available.

BERTHING: There is no preferential berthing, and berthing is indicated by the Port Authority. Vessels are attended to in the manner "first come first served".
Berthing facilities are as follows:
1. Container Pier, length 240 m. Depth alongside 13.35 m. (Designed for 25,000 d.w.t. vessels).
2. Concrete Pier (Container Pier extension of this Pier). Length 370 m. (2 berths). Depth alongside 13.35 m.
3. A special berth with conveyor-belt system for loading of carton boxes such as bananas, frozen meat, as well as the handling of inbound and outbound cargoes such as fertiliser and cottonseed meal. Bananas can be loaded into 4 hatches at one time at a rate of 4,500 boxes per hatch per hour. Depth alongside at low water is 35 ft.

Port Authority equipment includes fork-lift trucks with capacity up to 7,000 lb. and 3 barges (2×60 ton and 1×80 ton capacity).

CRANES: Two mobile cranes, capacity 75 tons and 12.5 tons.

STEVEDORES: *Working Hours:* The Port gives service 24 hours a day under the following schedule:
From 0700 to 1200
From 1300 to 1800
From 1900 to 2400
From 0001 to 0600

Each shift is of 8 hours. Meal hours are from 0600 to 0700; 1200 to 1300 and 1800 to 1900. The first shift commences at 0700 and is completed at 1600; the second shift is from 1600 to 2330. When a vessel announces with sufficient anticipation its intention to work during night-time continuously until the following day then a second shift does not work a full 8 hours but is relieved at 2200 hours and completely new gang takes over from 2200 until 0600 the following day.

When a vessel does not wish to work during the entire night, it may do two things: (1) Suspend all operations at 2330; (2) Work with the gangs of the second shift up until 0230 hours of the following day after which time the gangs of said second shift cannot continue working. Normally gangs are called at the following fixed official hours: 0630, 0930, 1230, 1530, 1830 and 2130, however on special occasions and with the approval of the syndicate, it is possible to integrate gangs at any hour of the day.

Average Cargo Handling Rates:

Exports:	Tons of 1000 kilos per gang hour
Cottonseed meal in bulk	48
Raw sugar in bulk-dumped by hand	48
Cottonseed in bags	45
Coffee in bags	45
Sesameseed in bags	45
Cotton in bales of 250 kilos each	40
Frozen meat	28
Lumber	12

Imports:	Tons of 1000 kilos per gang hour
Drums	40
Wire rolls	40
Bulk cargo (discharged by clam-shells)	35
Fertilisers – insecticides in bags	30
Vehicles (by weight)	30
Paper rolls	27
Wheat (by aspirators)	20
Oats (by aspirators)	15
General cargo	15

MEDICAL: There are several doctors in the port and most of the Agents have a particular doctor to their service. Hospital facilities are also available. No particular inoculation is required.

TANKERS: The only tankers which frequent this port are those of Esso Standard, Parcel Tankers and the Athel Line. There is one tanker berth; depth alongside 13.35 m. and each of the above-mentioned companies have their particular load/discharge lines.

The Esso tankers only discharge oils, the Athel tankers load out molasses, the Parcel tankers discharge solvents and occasionally others load out cotton seed oil.

There are 9 lines belonging to the consignees ranging from 4 in. to 12 in.

Loading rates:		Tons (1000 kilos) per hour
Molasses	12 in. pipe	140
Bunker or asphalt	8 in. pipe	409
Aviation gasoline	6 in. pipe	237
Hexane	6 in. pipe	240
Aromatics	6 in. pipe	203
Chemical Products	6 in. pipe	210
Turpentine	6 in. pipe	125
Coconut oil	4 in. pipe	60
Lubricants	4 in. pipe	45
Tallow	4 in. pipe	35

DENSITY: (Average) Rainy season 1014, dry season 1020.

FRESH WATER: Fresh water is available and is supplied from connections on the pier, by gravity, at a rate of approximately 10 t.p.h.

FUEL: Corinto cannot supply bunkers. In emergencies small quantities of bunkers and/or diesel oil may be supplied by private firms.

DEVELOPMENTS: Projected installation of bulk handling plant, additional warehouses and extension of pier 1,500 ft. with 2 transit sheds, new administration building, stevedores shed, equipment shed and repair shops; redesigning of range lights and buoys and increasing amount of same, also area for Industrial Park. Completion expected 1978.

A 40 ton container handling crane, 70,000 lb. capacity front loader, tractors and trailers have been ordered for the container berth.

GANGWAY/DECK WATCHMEN: After entering, 2 Custom Officers are placed on board all vessels and their meals must be furnished on board.

OPENING/CLOSING HATCHES: If vessel is equipped with regular hatch boards or pontoons, stevedores open and close hatches as well as swing out booms. However, if covers are of the McGregor type or mechanical, the crew has to do the job.

CERTIFICATES: Ship's Registry Certificate is required from ships making their first call at the port.

CUSTOMS ALLOWANCE: There is no limit on tobacco allowance to be held out of Bond but crew members are only permitted to take 2 packages of 20 cigarettes ashore. Crew not permitted to take any alcohol ashore. Anyone trying to do so will be subjected to heavy fine through Master of their vessel.

IDENTIFICATION CARDS: Crew members allowed ashore if they wish to do so after being previously identified by means of a seaman's book or a passport. This document is kept by the Customs Guard at the foot of the gangway and given back to the Crew member when he returns to the vessel.

CONSULS: In Corinto

Colombia
Costa Rica
Denmark
Ecuador
El Salvador
France
Honduras
Mexico
Sweden
Venezuela

REPAIRS: There are no shipyards; no large-scale repairs available. Small motors and generators may be repaired in shops in Corinto and Chinandega.

AIRPORT: The airport at Managua is approximately 150 km. from the port and served by regular airlines with daily flights.

REPATRIATION: Can be effected.

SERVICES: *Provisions:* There are several ships chandlers operating in the port who are in position to supply vessels with provisions necessary and required by stewards, engine or deck departments.

Laundry: The same ships chandlers can take care of any amount of laundry. Drycleaning can be done by these suppliers in the nearby city of Chinandega.

Cleaning: There are special gangs of labourers in the port who work on vessels doing odd jobs such as cleaning, chipping, painting, etc.

Transportation: For anchored vessels, there is a very efficient ship-to-shore launch service.

There is taxi service available for transportation by day or night to any part of the country. There is an air-conditioned express bus service between Corinto and Managua under the following schedule:

From Corinto	0400 hrs. arrive Managua	0645 hrs.
From Corinto	0600 hrs. arrive Managua	0845 hrs.
From Managua	1445 hrs. arrive Corinto	1800 hrs.
From Managua	1745 hrs. arrive Corinto	2030 hrs.

Hotels: There is a small third-class hostel in the port, however in the city of Chinandega there is the Hotel Cosiguina with all the modern conveniences and facilities desired. Chinandega is connected to Corinto by a modern highway.

TIME: Local time is Central Standard Time, GMT minus 6 hours. There are no alterations during the year.

HOLIDAYS: Official holidays are: January 1st (New Year's Day); Holy Thursday; Good Friday; May 1st (Labour Day); May 3rd (Local Patron Saint's Day); July 14th (Annullment Chamorro-Bryan Treaty); September 14th (San Jacinto Independence Battle Day); September 15th (Independence Day); October 12th (Columbus Day); December 25th (Christmas Day).

In accordance with regulations, no work will be done on these days, however, from experience, we know that with the only exception of May 1st (Labour Day), all other holidays are workable under special arrangement.

POLICE/AMBULANCE/FIRE: Police 269; Ambulance 313; Fire 421.

SHORE LEAVE: Allowed. See "Identification cards".

AUTHORITY: Autoridad Portuaria de Corinto.

PUERTO CABEZAS: 14.01 N. 83.23 W.

DOCUMENTS:

1 Clearance from Last Port.
10 Voyage Memorandums.
11 Crew Lists.
10 Passenger Lists.
10 Stores Lists.
1 Bill of Health.
12 Ballast Manifests.
13 Manifests of Cargo.
4 Bills of Lading.
10 sets Tally Books.

PILOTAGE: ETA required 24 hours before arrival at the port. The Pilot uses a boat with an outboard motor and boards about one mile off the port. Agent advises the Pilot the date of arrival, he goes out when he sees vessel.

ANCHORAGE: Vessels can anchor about 0.5 mile South of the wharf. Depths in anchorage 20-22 ft.

MAX. SIZE: Max. length, 400 ft. Draft 19 ft. 6in. Difference between high and low tide is 18 in.

HEALTH: The inspection takes place on arrival. It is not necessary when the vessel comes from some other port in Nicaragua.

RADIO: The Nipco has a radiophone for personal use, but they make contacts with vessels. The frequency is 2738. It is better to use or send radiogram via Radio Tropical in Managua.

TUGS: There is no tug service.

BERTHING: There is wreck in front of the wharf. The location is: 14° 0′ 57″ North, 82° 22′ 4″ West, 1,200 yd. from wharf end.

STEVEDORES: The Agent advises stevedores arrival of vessel. They discharge 8 tons of general cargo each hatch (one gang) per hour.

MEDICAL: Not necessary to advise the need of a doctor, only for emergencies. One hospital and two other doctors, apart from the official doctor of the port.

TANKERS: There are 2 pipes of 6 in. diameter on the wharf. There is no special berth for oil tankers.

DENSITY: 1025.

FRESH WATER: The fresh water is carried to the wharf by truck or from one pipe on the wharf. The boiler water gets to the vessel by the pipe on the wharf.

FUEL: Gasoline, diesel oil and lubricants are supplied by Texaco. Arrangements are made at the arrival of the vessel.

GANGWAY/DECK/WATCHMEN: It is not obligatory. It is customary to have two custom guards in the gangway.

OPENING/CLOSING HATCHES: The opening and closing of hatches is done together by the crew of the vessel and the stevedores.

CUSTOMS ALLOWANCES: Each of the crew can take 2 packs of cigarettes with the seal broken, and one bottle of wine or liquor opened.

IDENTIFICATION CARDS: Not needed, just passport or seaman's book.

CONSULS: Only consul of Panama available locally.

REPAIRS: Minor repairs only can be effected.

REPATRIATION: It is possible and only a passport needed. Necessary to go to the capital by air, thence to any part of the world.

AIRPORT: Distance of airport from wharf is about 2 kilometres. Service every day to the capital except Sundays and holidays. The name of the only airline is Lineas Aereas de Nicaragua (Lanica).

TIME: Local time is Central Standard Time, GMT minus 6 hours.

HOLIDAYS: Holidays are 1st January; Holy Thursday; Good Friday; 1st May; 14th July; 14th and 15th September; 12th October and the 25th December.

SHORE LEAVE: The crew is allowed to go ashore after the vessel is received by the Authorities.

DEVELOPMENTS: A hydrographic survey has been completed in the port zone and surrounding area to establish the best place for future port facilities or whether expansion should be made to the existing port. This survey is being effected in view of projected installation of paper and pulp industry and forthcoming development of agricultural and mineral products which could be exported through the port.

The Port Authority is taking the necessary steps to get technical and financial help to make a general survey of the zone in order to find an adequate and/or protected site to place the new port installations. Port plans are combined with the paper and pulp industry, which is supposed to be installed in the next few years.

DELAYS: Delays in berthing can be expected from bad weather.

AUTHORITY: Autoridad Portuaria de Puerto Cabezas.

PUERTO SOMOZA: 12.12 N. 86.46 W.

DOCUMENTS:

Clearance from previous Port.
6 copies Voyage Memorandum.
6 Stores Lists.
6 Passenger Lists or negative declaration, 3 to be visaed.
6 Crew Lists.
8 Cargo Manifests, 3 to be visaed.
8 Tally books.
6 Lists of Mail, Explosives or Drugs if carried.

9 crew lists and 6 store lists should be despatched by the Nicaragua Consul at loading port if possible, otherwise they are forwarded by Agents from the Panama Canal.

PILOTAGE: Optional by local Pilots. Leading lights are installed, at the entrance to the port, prominently sited on a hill. Several buoys indicate exact anchorage positions.

Tankers: A Pilot is provided by the oil company in agreement with the Panama Canal Authority. Pilot boards about 0.5 mile West of the sea berth.

ANCHORAGE: About 1.75 miles off port entrance, depth is 30 ft. at low water, and about 45 ft. at high water.

RESTRICTIONS: Port is open day and night without exception.

MAX. SIZE: Tankers at Sea Line Terminal up to 850 ft. length and 41 ft. draft.

HEALTH: Port Health inspector boards all vessels on arrival.

RADIO: There is a radiotelephone installation at the Customs office. No VHF.

TUGS: Not available for manoeuvring vessels. 5 small tugs employed for shifting lighters.

BERTHING: No quays for ocean-going vessels. Vessels work cargo to lighters at the anchorage.
STEVEDORES: Port has 4 gangs of 40 men each for boarding vessels.
TANKERS: *Sealine Terminal.* The sea berth is situated in approximate location 12° 10′ N. 86° 49′ W., about 2 miles off shore in a depth of 47 ft. There are 5 mooring buoys, 2 at the bows and 3 at the stern of the vessel. The first lines to the buoys should each consist of 2 good ropes lashed end to end to effect the length required. 5 lines are normally used at each end of the vessel.

Strong winds may delay berthing or cause vessel to vacate the berth once moored. Sailing at night is not recommended for safety reasons. The discharge hose is lifted on the port side by ship's crew.
MEDICAL: Doctor available in case of emergency. Nearest hospital at Leon, 35 km. away.
FRESH WATER: Not available for supply to ships.
FUEL: Not available for supply to ships.
OPENING/CLOSING HATCHES: Normally performed by stevedores. Mechanically operated hatches are opened by ship's crew.
CUSTOMS ALLOWANCES: Each crewman allowed two packets of cigarettes. No wine/spirits allowed to be taken ashore.
IDENTIFICATION CARDS: Seaman's Book required for going ashore.
CONSULS: Nearest at Leon, 35 km. distant.
REPAIRS: Small items for repair can be sent to Leon, 35 km. away.
REPATRIATION: No facilities for crew changes. If crew member left behind, Agents are responsible for his repatriation at vessel's expense.
AIRPORT: Las Mercedes international airport at Managua, 75 km. away.
TIME: Central standard time, GMT minus 6 hours. No alterations.
HOLIDAYS: All holidays can be worked.
POLICE/FIRE/AMBULANCE: Police available locally. Nearest fire and ambulance stations are at Leon, 35 km. away.
SHIPMASTER'S REPORT: 1976. Port authorities board the vessel at 0600 hrs., either at outer anchorage or at discharging anchorage. There is no night work performed unless the vessel reaches discharging anchorage with last daylight.

In general, stevedores are well acquainted with handling cars. Vessels carrying cars, for Pto. Somoza should avoid loading No. 1 hatch for this port. As there is a permanent swell at anchorage, barges cannot lie safely under No. 1 hatch.

There is a Pilot available, on request, who also acts as stevedore-foreman.
SHIPMASTER'S REPORT: 1978
Approach: Coastwise from the North, no difficulties being encountered.
Anchorage: Vessel anchored in position with the rear leading light bearing 088°(T) – 2.1 miles, starboard anchor used, 4 shackles in 8 fathoms of water.

It is advisable to run in to the anchorage slightly to the North of the leading line, thus avoiding the shoal patches on and to the Southward of the line. The anchor should, however, be let go right on the leads, otherwise the vessel will be required to shift anchorage, as happened in our case.

Buoyage was as per B.A. Chart 1960.
Point Penas del Tiscuco: Now has a large power station on it, not shown on the Chart. This is a good land mark when making the port. The shape of the point, as observed on Radar, appeared slightly different from the shape shown on the Chart.
Pilotage: Pilot is available if required, but was not used. I would advise a deep-draft vessel to take a Pilot.
Communications: For long distance communications, it is best to maintain radio watches.

The Charter's Agents have a VHF set in their Office at Corinto and contact can be maintained for day to day matters in this way.
Charter's Agents: They have a resident water clerk at Pto. Somoza, who can be contacted on Channel 27, VHF. He is available from 0800 to 1200 hrs. and from 1400 to 1800 hrs.

Under normal circumstances, a representative from Corinto will meet the vessel on arrival and visit her prior to departure, but this was not possible on this occasion.
Documents required: As per "Guide to Port Entry".
Officials: Were helpful. 1 Customs guard is on duty at all times, but the Guards are regularly relieved from the shore and the ship is not required to provide accommodation for them.
Cargo Work: Continuous and fast. Large, modern lighters, towed by powerful tugs, were used. Due to the swell, these lighters ranged heavily alongside. Although the lighters were well fendered, several indentations were caused in the ship's side. Delays due to lack of lighters were minimal.

Rate of discharge, net of delays, was 60 tons per gang hour, steel coiled rod.
Pratique: Granted on arrival.
Provisions: Not purchased.
Fresh Water: Unobtainable.
Shore Leave: Under normal circumstances, can be arranged by catching a ride on the lighters.
AUTHORITY: Administracion de Aduana. Puerto Somoza.

NOTES

Please also advise Shipping Guides Ltd.

Nigeria

GENERAL

Documents: The Port Authorities have to be provided with 7 copies of the Cargo Manifest 14 days before the vessel berths, otherwise berthing will not be possible.

In the near future 12 copies of the Cargo Manifest and 5 copies of the Freighted Manifest will be required.

Shipmaster's Report: 1978.

No ship is to enter Nigerian waters unless issued with a Ship's Entry Number. Issuing Authority, not known.

BONNY: 04.26 N. 07.09 E. (Inshore Terminal)
04.11 N. 07.14 E. (Offshore Terminal)

(See Plan Book)

OPERATORS: The Shell-B.P. Development Company of Nigeria Ltd.

DOCUMENTS:

7 Crew Lists.
3 Vaccination Lists.
3 Maritime Declaration of Health.
8 Lists of Last Port of Call (6 weeks).
6 Lists of Birds & Animals.
7 Passenger Lists.
1 Stores List.
1 Personal Effects List.
2 Arms & Ammunition Lists.
1 Clearance Last Port.

Agent: Requires NPA lights and buoy dues form.

PILOTAGE: *Inshore berths:* Pilotage is compulsory. Pilots board off Fairway Buoy; incoming ships must *not* enter Bonny Channel without a Pilot on board.

Offshore berths (SBMs): Berthing Master will board vessel on arrival or at anchorage, and remains on board throughout and acts as loading master. On arrival at anchorage contact Berthing Master on VHF Channel 14 call sign "Ocean Berthing Master".

N.B. also contact Bonny Terminal on Channel 14 on arrival at Offshore anchorage to ensure vessels arrival etc. is recorded.

ANCHORAGES: *Inner Berths:* West of Fairway Buoy in 8–9 fathoms.

Outer Berths: 3 miles South of manifold platform in position 4° 11.2′ N. 7° 14.2′ E.

Vessels must not proceed inshore of this position without a Pilot. When at anchor listening watch must be kept on VHF Channel 14 and this Channel must not be used for intership communication.

RESTRICTIONS: Berthing not possible at night at the Inner berths.

The maximum draft to which a vessel can load at Bonny is governed by three factors *viz.*

1. Datum Depth in Bonny Channel.
2. Height of the tide.
3. The underkeel clearance allowed.

Datum depth of the Bonny Channel is dependent on the amount of dredging; at the present time Datum depth is 38 ft. 6 in.

Tide is variable but the relevant factor is the height of the tide at the time the vessel will transit the Channel. The underkeel clearance allowed is dependent on the time of the year and is related to the height of the swell expected to be encountered in the Bonny Channel.

The present allowances are as follows.

(January 1st–February 15th

		ft.	ins.
1/1-15/2	=	2	6
16/2-15/3	=	2	9
16/3-31/3	=	3	0
1/4-30/4	=	3	3
1/5-15/5	=	3	6
16/5-31/5	=	3	9
1/6-31/8	=	4	0
1/9-15/9	=	3	9
16/9-30/9	=	3	6
1/10-15/12	=	3	3
16/10-31/10	=	3	0
1/11-15/12	=	2	9
16/12-31/12	=	2	6

Thus it can be seen that the max. draft at any particular time is equal to:

Datum Depth plus Height of Tide minus Underkeel Clearance Allowance.

A typical calculation would be as follows:

		ft.	in.
Datum Depth	=	38	6
Height of Tide	=	+ 7	0
		45	6
Underkeel Clearance Allowance		3	9
Max. Draft	=	41	9

MAX. SIZE: *Inshore Terminal:* Min. size approximately 18,000 tonnes or 161 m. (530 ft.). Max. length 269 m. (850 ft.). Max. beam no restriction. Max. draft, see "Restrictions".

Offshore Terminal: Min. size 45,000 tonnes s.d.w.t. Max. size 300,000 tonnes s.d.w.t. Max. length no restriction. Max. beam no restriction. Max. Draft 22.8 m. (75 ft.).

HEALTH: Q-flag to be shown on arrival, except if from another Nigerian port, yellow fever and small-pox inoculations compulsory. In case of suspected disease on board, advance notice to Agent advisable. Valid Yellow Fever and Smallpox Certificates to be produced for all crew members. Also Deratisation Exemption Certificate.

RADIO: Original ETA message should be sent via Lagos Radio to the Lagos Agents at least 72 hours before arrival. 48 hours before arrival at the Fairway Buoy a further ETA message should be sent to Lagos Agents. When anchored at the Fairway Buoy contact Bonny Terminal on Channel 14, passing date and time of arrival (same for Harbour Master Bonny), keeping watch on VHF Channels 14 and 16. Failure to comply with the requirements for ETA messages may result in delays in berthing the ship.

BERTHING: *Inshore Terminal:* There are 4 berths (CBMs) designated A, B, C and D, from upstream. A, C and D consisting of 5 buoys (1 astern, 1 on each quarter, 1 ahead and 1 on the inshore bow). A, C, D are flood tide berths. B is ebb and flood tide berth consisting of 6 buoys, the 6th buoy is on the offshore bow or quarter depending on which direction the ship is berthed.

Tankers berth on the flood tide (or ebb at berth B) using the offshore ships anchor as an additional mooring point. Ships moor by means of 40 mm. wires (provided by the Terminal) one 40 mm. wire is picked up from each of the buoys and ship's ropes are not normally used. Mooring is carried out by ship's crew; and care must be taken to ensure that the mooring wires are laid out in a seamanlike manner to prevent runs and kinks forming in the wires. Mooring wires must not be kept on tension winches, but stoppered off by means of Carpenter's stoppers provided by the Terminal, and then "turned up" on the bitts. Two men from the Terminal are put on board the vessel to assist the ship's crews position and set up the Carpenter's stoppers.

Vessels must be equipped with hose-handling derricks with a SWL lifting capacity of not less than 5 tonnes.

Vessels must arrive with clean ballast.

Load-on-top system operates at Bonny, but slops cannot be accepted ashore. Maximum loading rate: 5,000 t.p.h.

Grades handled: both light and medium crudes.

Offshore Terminal: Two SBMs fitted with two 16-in. double nylon mooring lines and 1 hose string terminating in two 16-in. diameter end hoses.

No. 1 SBM is S.S.W. of the Platform. No. 2 SBM is S.S.E. of the Platform and they are designated Bonny West and Bonny East respectively.

Berthing effected under guidance of berthing master and local assistant who both remain on board throughout loading operations. Accommodation for both to be provided. Whilst berthed a mooring rope must be ready on the poop deck so that the mooring launch (line boat) may, in the event of the vessel riding up on the SBM, make fast and tow to re-align vessel.

Vessels must be equipped with hose handling derricks with a capacity of not less than 7 tonnes.

Vessels must arrive with clean ballast.

Load-on-top system operates at Bonny but slops cannot be accepted ashore. Max. loading rate: Light crude 61,712 bbls.p.h.; Medium crude 58,400 bbls.p.h.

HOSES: *Inshore Terminal:* Vessels should endeavour to present two 12-in. diameter 150 ASA connections on the port side of the vessel when berthing at A, C, D, berths. On B berth two 16-in. 150 ASA connections should be provided on the port or starboard sides of the vessel – dependent on whether the vessel is berthing on ebb or flood tides. Vessel's hose handling derrick to be rigged and plumbed overside. Hoses will be connected by shore labour, but winchmen must be supplied to operate the ship's lifting gear. The derrick runner must be equipped with a suitable hook. The estimated weight of each hose string at berths A, C and D, when lifting with the ship in light condition is between 3 and 5 tonnes. Ships fitted with only 5 tonne derricks should exercise care when lifting to avoid shock loads. On "B" the estimated lifting weight is between 5 and 7 tons.

Weight of Hoses: Indication only of approximate weights of hose strings in tonnes (including fittings, floats, and pick-up buoy). Assumed total lift of 7.6 m. (25 ft.) above deck level and vessel in light draft condition with hoses full of crude oil SG 0.850.

d.w.t.	*16 in.* *I.D. Hoses* tonnes	*12 in.* *I.D. Hoses* tonnes
100,000	8.3	4.9
70,000	7.5	4.5
50,000	7.3	4.4
35,000	7.1	4.2
18,000	6.3	3.7

Offshore Terminal: Port or starboard side amidships (dependent on which SBM is used). Vessels should endeavour to present two 16-in. standard 150 ASA connections on arrival. Ships crew are required to connect and disconnect the hoses under the advice of the berthing master and/or his assistant. A derrick SWL at least 7 tonnes must be rigged ready on both port and starboard sides and plumbed clear of this side. Derrick runner must be equipped with suitable hook.

Weight of Hoses: Indication only of approximate weights 16-in. I.D. hose strings in tonnes (including fittings, floats, and pick-up buoys with all hoses full of crude oil SG 0.850. Assumed lift is 7.6 m. (25 ft.) above deck level, with vessel in light draft condition.

d.w.t.	tonnes
200,000	8.9
100,000	8.1
70,000	7.3
50,000	7.0
35,000	6.9

SHORE LINE SYSTEM: *Inshore Terminal:* Crude oil is loaded at berths A, C, D via 32 in. submarine lines and 2 strings of flexible hoses each consisting of 3 lengths of 16 in. hose and 3 lengths of 12 in. hose at the ship end, and via a 28 in. submarine line and 2 strings of 16 in. flexible hose at berth B. Reducers are made available by Terminal on request.

Offshore Terminal: Vessels load through SBM from shore through a 48 in. diameter line, thence through a 24 in. diameter floating hose which is terminated by a "Y" piece and two 16 in. diameter hose tails which connect to the ships manifold. Loading rates up to 8,000 t.p.h. may be expected. The 48 in. submarine loading line from the Terminal is some 20 miles in length, therefore great care must be exercised during loading when ships valves are manipulated to avoid pressure surges. Pressure recorders are normally fitted at the spool piece between ships manifold and tail end of the hose string to monitor pressure changes generated on board the vessel.

BALLAST: No facilities for dirty ballast, no tank cleaning facilities.

MEDICAL: Hospital at Bonny.

DENSITY: *Inshore Terminal:* 1015 at Low Water particularly during rainy season.

Offshore Terminal: Salt.

FRESH WATER: Available by barge at rate of 15 t.p.h. 48 hours advance notice required as barge comes from Port Harcourt.

FUEL: Available only by barge from Port Harcourt.

CUSTOMS ALLOWANCES: 200 cigarettes per man per 7 days. 1 wine or 1 btl spirit per officer per 7 days.

IDENTIFICATION CARDS: Crew to carry passport or seaman's book whilst ashore.

CONSULS: Nil.

REPAIRS: Nil. See "General".

REPATRIATION: Possible via Port Harcourt and Lagos.

AIRPORT: 28 miles by river, to Port Harcourt, then 7 miles by road, twice daily to Lagos, no international flights.

TIME: GMT plus 1, no change.

POLICE/AMBULANCE/FIRE: Contact Via Harbour Master or Shell/BP, VHF 14 or 16.

SHORE LEAVE: Not permitted.

GENERAL: Accommodation ladder must be rigged – used in conjunction with pilot ladder at offshore terminal – and for direct access in inshore terminal. Limited medical assistance available but in extreme emergencies only. Treatment of minor ailments and vaccinations etc. is under no circumstances available. It may be possible in the event of an accident to obtain medical advice. Contact terminal VHF Channel 14 in first instance. Pollution of the sea by dirty ballast bilge discharge or any other means will result in heavy fines, or in severe cases, imprisonment. Any attempt on the part of the boarding officers to persuade the Master to supply more than normal representation should be resisted. In the event of any problem arising over such a matter full details should be *reported to the Agent.* Nigerian flag to be flown. Air letter forms are not acceptable unless with Nigerian stamps.

Delays: Inshore berths: None.

Offshore berths: Worst weather period June–September when heavy swell may be encountered.

Immobilisation of engines: Not permitted at the berth. Not permitted at SBMs. Not advised at sea anchorage due to indifferent holding ground and the existence of obstructions and foul ground in the vicinity.

Loading: Ships are required to load cargo as rapidly as possible by day and night in accordance with the terms of their charter parties.

This means that ships are expected to load as fast as Shell-BP can supply or they can safely receive. The question of how fast a ship can load is the responsibility of the Master having regard to his Owner's instructions, the charter party and the experience of ship's personnel. However, as further guidance and in absence of any instructions to the contrary, ships are expected and nominations of vessels are accepted by Shell-BP on the understanding that ships will be able to accept a bulk loading rate per hour of not less than ten per cent of the summer deadweight of the vessel.

At offshore berth the Berthing Master acts as Loading Master during loading operations and is provided with walkie-talkie radios to ensure adequate ship/shore communication.

Loading Masters visit each vessel, and Masters are requested to co-operate in the completion of the Shell-BP Tanker Port Performance Time Sheet by ship and shore personnel at all terminals. Only crude oil is handled at Shell-BP terminals, loading temperatures and specific gravities of the two grades of crude, Bonny Light and Bonny Medium are reasonably constant and are approximately:

Bonny Light	0.823 at loading temperature
Bonny Medium	0.890 at loading temperature

Early Departure Procedure: A modified early departure procedure is in operation at Bonny Offshore Terminal. Masters are requested to sign all documents in blank, retaining in their possession Masters' consignee copies. On completion of loading, the berthing Master will supply Masters with a copy of the figures required for the completion of the retained documents. Masters requested to complete these before the departure of the vessel. Customs and Agency representatives will normally board vessels during the daylight hours. Depending on other commitments of the offshore launch, it may be necessary to request Masters to provide temporary accommodation for these officials.

AUTHORITY: Nigerian Ports Authority.

AGENT: Alraine (Nigeria) Ltd., 26 Creek Road Apapa. POB 265, Apapa. Tel. 47770. Telex 21 244. Cables: "Freight Lagos".

BRASS RIVER (Offshore Terminal): 04.04 N. 06.17 E.

SHIPMASTER'S REPORT: 1976.

DOCUMENTS:

1 Maritime Declaration of Health.
2 Vaccinations Lists.
6 Crew Lists.
4 Passengers Lists.
2 Stores Lists.
2 Personal Effects Lists.
4 Arms and Ammunitions Declarations.
4 Lists of Animals and Birds.
4 Lists of Ports of Call (last 6 weeks).
Clearance last port.

APPROACHES: Coast line is well defined on high definition radar at a distance of 12 to 15 miles and sounding machine will assist efficently while approaching.

Terminal consists of a central platform showing two flashing lights (one red and one white) – letter "U".

Two SBM's: No. 1 situated 1 mile East of the platform is equipped with a Racon (letter "A"). No. 2 situated 1 mile West of the platform.

PILOTAGE: Berthing Master will board the vessel 2.5 miles North East of the platform. Contact "Brass Terminal" on VHF Channel 16 for berthing instructions and immediately on anchoring to ensure that vessel's arrival is recorded.

ANCHORAGE: 2.5 miles N.E. of the platform.

RESTRICTIONS: Vessels berth in day hours only.

MAX. SIZE: About 250,000 d.w.t.

PRATIQUE: Agent, Health and Customs Officers board at same time as Berthing Master.

RADIO: ETA to be given via Lagos Radio, 120, 72, 48 and 24 hours before arrival at the Terminal anchorage.

TUGS: None available.

BERTHING: Effected under the guidance of Berthing Master assisted by a party of 4 Nigerian people and ship's crew.

Whilst berthed a mooring rope must be ready on the poop deck so that the mooring launch, in the event of the vessel riding up on the SBM, may make fast and tow to realign the vessel.

Each SBM is fitted with 2 nylon mooring ropes connected on a single chain and two hose strings with 16 in. end hoses. Position of hoses connection: amidship port side. Vessel should endeavour to present on arrival 2×16 in. connections on port side. A derrick of 7 to 10 tons SWL with a suitable hook must be rigged ready on port side.

MEDICAL: No facilities but assistance may be given on an emergency basis.

FUEL: Not available.

FRESH WATER: Not available.

DENSITY: About 1025.

REPATRIATION: No crew changes possible.

SHORE LEAVE: Not permitted.

GENERAL: Crude oil handled is: Light Nigerian Crude API=44.0. Temperature about sea temperature, R.V.P.=10.5. Two of the four Nigerian crew stay on the forecastle head and maintain security watch throughout loading operations. Accommodation must be provided for Berthing Master and 2 men. Accommodation ladder is not required. Pilot ladder or pilot hoist are more suitable because of the swell. Immobilization of engine is not permitted at SBM's.

Early Departure Procedure: Masters are required to sign all documents in blank. On completion of loading, seals are controlled by customs officer and Agents complete Master's and Consignee's copies of documents whilst ship is disconnecting and leaving berth.

TERMINAL OPERATOR: The Nigerian AGIP Oil Co. Ltd.

BURUTU (inc. Warri): 05.21 N. 05.31 E.

DOCUMENTS:

7 Ports of Call Lists.
5 Crew Lists.
5 Kroo boy Lists.
2 Animal Lists.
2 Arms and Ammunition Lists.
9 Manifests.
2 Summaries.
1 extra Manifest for transhipment cargo.
3 Stores Lists.
2 Crew Declarations.
2 Inward Reports.
2 NPA Master's Declaration.
2 NPA ship's particulars.
1 Customs Clearance.
1 Declaration of Health.
1 Vaccination List.

PILOTAGE: No compulsory pilotage. local Pilots or rather river guides, available at Escravos. No communication is possible with these guides from Burutu.

ANCHORAGES: 1 anchorage known as "the pool", opposite Okorodudu Town; max. draft for pool anchorage 14 ft. MLWS. Further anchorage at Forcados for vessels waiting to proceed to Burutu or Warri.

MAX. SIZE: Restricted only by draft. Official depth 21 ft. MLWS, governed by actual depth on Escravos bar which does vary from time to time and being dredged for increased draft. Latest information always available from Nigerian Ports Authority, Lagos.

HEALTH: International pratique regulations prevail. Pratique *not* necessary when coming from another port in Nigeria.
RADIO: Station, Port Burutu. Watch kept from 0730–1200, 1400–1700 hrs. on week-days and 0730–1200 hrs. on Saturdays on 2182 kc/s R/T and Channel 16 VHF.
TUGS: No tugs available.
BERTHING: No specific requirements to berthing. Berth number is hoisted on flagpole situated on No. 4 berth. Ships berthed in order of arrival.

Warri		*length (m.)*	*draft (m.)*
1	Buoys Fore and Aft	160	6.4
2	Buoys Fore and Aft	191	6.4
3	Single Buoy	No limit	6.4
4	Main Wharf	160	6.4
5	Canal Berth	322	6.1

Burutu

Two vessels normally berth alongside the wharves. The main wharf being some 750 ft. in length and a smaller wharf of some 300 ft. There is plenty of water alongside these berths and the depth that a vessel can load to is controlled by the Burutu flats which are 13 ft.

One 25 ton and 6×2 ton diesel cranes available for handling lighters only.
STEVEDORES: Advice given on radio during transit Escravos-Burutu is quite adequate. Normal rates approximately 13/15 ton per hook hour.
MEDICAL: Fully equipped hospital under supervision of resident medical officer situated at Burutu.
TANKERS: Only small coastal tankers use Burutu to periodically replenish bulk tanks, which have capacity for 1,800 tons gas oil and 900 tons fuel oil, used primarily for consumption by local vessels.
DENSITY: Fresh water.
FRESH WATER: Limited amount available in wet season from shore line at rate of 4 t.p.h.
FUEL: No fuel available.
FIRE PRECAUTIONS: Small fire station situated in port area. No specific fire precautions required.
GANGWAY/DECK WATCHMEN: Considered advisable have gangway/deck watchmen.
OPENING/CLOSING HATCHES: Normally carried out by stevedores, except in ships fitted with Mcgregor hatches.
CUSTOMS ALLOWANCE: 200 cigarettes; part bottle.
IDENTIFICATION CARDS: Either discharge books, or passports advisable.
CONSULS: No consulates at Burutu.
REPAIRS: Dockyard has four slipways which can accommodate most creek and river vessels up to tonnage of 600 tons. Management of dockyard in hands of qualified engineers who are able carry out afloat, hull and/or machinery surveys as required. Limited deck, hull and engine repairs can be carried out.
REPATRIATION: Facilities exist for individuals but not for crew changes.
AIRPORT: Small airstrip 1.5 hours away by launch, where daily scheduled flights by small twin-engined aircraft operate to Lagos.
TIME: GMT plus 1.
HOLIDAYS: See "Lagos".
POLICE/AMBULANCE/FIRE; No telephone numbers – all these services available in port area.
TELEPHONES: Facility available for connecting telephones on board.
SHORE LEAVE: Crew members allowed ashore.
DEVELOPMENTS: A wharf, length 1,300 m. with 6 berths under construction at Warri.
AUTHORITY: Nigerian Ports Authority, Burutu.

AGENT: Intertrans (Nigeria) Ltd., 4 Khalil Road, POB 374, Warri. Tel. Warri 341. Telex via Lagos 21.244. Attention Warri.

CALABAR: 04.57 N. 08.27 E.

Situated on right bank of Calabar River, 42 miles from sea.
DOCUMENTS, and all general information, refer to "Lagos".
PILOTAGE: Not compulsory, but the services of the Harbour Master can be requested for pilotage duties.
MAX. SIZE: The max. recommended draft for vessels using the port of Calabar is 5.94 m., which is, at present, governed by a depth of water on Duke Town Crossing of 3.66 m. Max. LOA 160 m.
BERTHING:

Berth	*Length (m.)*	*Max. Draft. (m.)*	*Remarks*
Pool Anchorage	—	—	3 Ocean going vessels
Jackson Wharf	27	5.79	1 Coastal going vessel
Milerio Wharf	61	7.32	1 Ocean going vessel
Ivy Warf	41	4.27	1 Ocean going vessel
Cement Wharf	75	5.79	1 Ocean going vessel

FRESH WATER: Available.
AIRPORT: At Calabar.
AUTHORITY: Nigerian Ports Authority.
AGENTS: Intertrans (Nigeria) Ltd. P.O. Box 10, Calabar. Tel: 175. Telex: via Lagos 21244. Att: Calabar.

DEGEMA (Including Abonnema): 04.44 N. 06.46 E.

LOCATION: Degema and Abonnema are very close to each other on the Sonbreiro River and are divided by a Creek through which launches and small craft sail to Port Harcourt.
PILOTAGE: Compulsory through Boler Creek. Pilots embark at Bonny.
BERTHING: The ports are approached from Bonny via Boler Creek, which has a depth of 4.88 m. at HW. Anchorages for 3 vessels in harbour to load/discharge, max. draft 16 ft. (limited by depth of Boler Creek). Cargo is handled by lighters.

Bulk Oil Plants of Nigeria Ltd. operate a berth for the loading of bulk palm oil onto main line vessels.
AUTHORITY: Harbour Master, Port Harcourt.

ESCRAVOS: 05.30 N. 05.00 E. (See Plan Book)

DOCUMENTS: Required and brought out by Pilot:

4 Nigerian Ports Authority/Masters Declaration.
2 Customs and Excise (Form C 13).
4 Ship's Report (Gulf) }on behalf of Agent.
2 Requests for Service }on behalf of Agent.

The sailing clearance will be completed after B/L figure of cargo loaded is available, and will be delivered to the ship before sailing.
PILOTAGE: Compulsory. Boarding area is in a position 3 miles W.N.W. of the berth operation platform.

Supervisor Pilot's Report: From my personal experience here at the Tank Farm, I can add that in poor visibility or when Tankers approaching this Terminal are having difficulties with their Radars, I am guiding them to proper anchorage using a small R.D.F. which is located at the local airport – Heliport in the Tank Farm and used by local aircraft traffic. The signal comes as "ES" (·   ···) on 305 kcs and gives a good bearing from a distance of 30 miles. This is not an official Navigational Aid, but I have used it successfully for many years and besides, when you have nothing else in the area, this is a great help to obtain a line-position.
NAVIGATION AIDS: Berth Operations Platform is a conspicuous steel structure 85 ft. high and is approx. 1 mile from Berth No. 2, between the berth and the shore. On top of this structure is a heliport, which at night is surrounded by red lights. In the event of a power failure a green intermittent light will be shown from one corner of the seaward side of the platform.

A RACON reflector is mounted on this platform for easy identification of the Gulf Sea loading area. Radar transmission from the incoming vessel triggers the RACON Unit which responds with the Morse Code letter "G" (– – ·), followed by a solid tail. This signal is observed visually on the ship's radar screen and appears very close to the point where the radar echo of the berth operations platform itself should appear.
ANCHORAGE: Vessels required to anchor on arrival will anchor in position approx. 3 miles W.N.W. of the berth operations platform, i.e. in a position Lat. 05° 31′ 00″ N., Long. 04° 57′ 30″ E., or as otherwise instructed.

On approaching the terminal, VHF contact can be established with the Mooring Master on Channel 16 and the vessel will be advised of which berth has been nominated for her cargo. At the same time, the vessel will be advised where the Mooring Master will board. In cases where VHF contact is not made, the vessels will remain in the anchorage area until such time as contact is made by radio or the pilot boat. Vessels are advised to anchor only in the stated area due to the existence of submarine pipe-lines in other areas.

Anchorage is forbidden in the mooring area.
RESTRICTIONS: Mooring and unmooring operations will be undertaken by day and by night under normal weather conditions.

Notice of Readiness will be accepted by the Company representative on arrival providing that the ship is in all respects ready to load.
MAX. SIZE: The Escravos Terminal consists of two Single Buoy Mooring Berths Nos. 2 and 3 only, the conventional Sea Berth (Berth No. 1) having now been de-commissioned.

The location of the Sea Terminal Berth No. 2 (SBM) for vessels up to 100,000 d.w.t. is off the North of the Escravos River in a position Lat. 5° 30′ 37″ N., Long. 4° 59′ 25″ E., and has a min. depth of water of 72 ft. at LWS.

Berth No. 3 (SBM) for 350,000 d.w.t. vessels is situated 4.25 miles W.S.W. of No. 2 berth in a position Lat. 5° 29′ 29″ N., Long. 4° 55′ 54″ E., and has a min. depth of 105 ft. at LWS.
RADIO: Vessels bound for Escravos must advise their ETA to Gocon, Lagos, 72 hours and 24 hours before arrival -the message to contain the vessel's name, ETA, Master's name. A 24-hour watch is maintained on VHF Channels 10 and 16, in the Senior Mooring Master's Office, and ships are usually able to make contact on this Channel at a distance of 20 to 30 miles on the seaward side of the Berth Operations Platform. Channel 10 is used for internal traffic and ship berthing operations.
MOORING: Before arrival at the pilot boarding area, it will be necessary to ensure that the following moorings are ready for use on arrival at the berths:

Four mooring ropes – buoyant lines if possible, e.g. polypropylene, on the forecastle head.

When the vessel is within reasonable distance of the buoy, 2 ship's lines will be carried by the mooring launch to the floating buoy lines and secured to same, these lines will then be heaved aboard. As the buoy ropes come clear of the water it will be noted that chains are attached to them. These chains are to be secured to the bitts in such a manner that the nylon is outside of the extreme length of the ship; i.e. so that the chains will absorb any chafing if the buoy line crosses the bow. There are two buoy lines.

Power must be available at all times on deck winches and windlass while vessel is at the berth.

A mooring line must be available aft, secured to the bitts and of sufficient length to enable a tug-boat to pick up the eye and tow on it to realign the vessel if necessary. If available, a buoyant line is also preferred in this position.

CARGO: Nigerian Light Crude -API 37° approx. Temperature 85° F. (fairly steady throughout the year).

HOSES: Lifting, connecting, disconnecting, lowering and other handling of hoses will be performed by the ship's crew, as advised by the Company representative, and where possible the Company will provide a pipe-line gang to assist the ship's crew. At all times handling of hoses will be performed by the ship's crew, as advised, and a deck officer must be in attendance.

Both derricks must be rigged and ready for use on arrival and vessels are cautioned that the weight of each hose is at least 5 tons under favourable conditions. Where possible, it is requested that the derrick runner is on one winch and the topping lift on another, as this will make the hose-handling operation much smoother and faster. In any case, members of the ship's crew will be required to operate the winch or winches.

As no equipment will be supplied from the shore; it is essential that all vessels nominated for this port have an adequate supply of gaskets, nuts, bolts, spanners, tools, etc. ASA reducers for use with the Camlock connections can be supplied in an emergency in the standard sizes. Failure to have these items will lead to delay in berthing and could even lead to a situation where the vessel was not accepted by the port. Such delays would be for the ship's account.

Berth No. 2: Loading is through an SBM which is approx. 33 ft. in diameter and held in position by 4 chains secured to piles sunk into the seabed. 1×24 in. floating hose is secured to buoy and has 2×12 in. tailing pieces attached to it with 12 bolt holes ASA 150 flanges; they are also fitted with Camlock connections.

Berth No. 3: Is a larger version of No. 2 and more heavily moored with 8 chains secured to piles sunk into the seabed. There is 1×24 in. floating hose with 2×12 in. tailing pieces. These are ASA flanges with Camlock connections, similar to those at Berth No. 2.

BALLAST: *Deballasting and Loading Procedures:* Vessels proceeding to Escravos to load must arrive with sufficient clean ballast for safe manoeuvring. A vessel arriving with dirty ballast will incur costly delays as it is not permitted to discharge dirty ballast to the sea. The "Load on top" system is accepted at this port and vessels are requested to arrive with the slop tank "settled out" as far as is possible and so avoid any chance of pollution of the Terminal waters from this particular tank.

The Nigerian Government has very strong views on pollution and vessels are warned that a very careful watch is kept at all times to ensure that pollution does not take place, or that if pollution should occur it is controlled as quickly as possible.

All vessels are cautioned to keep a close watch on the floating hose (or hoses) towards the end of deballasting, as it is possible, under certain conditions of weather and tide for the hose to become trapped under the fore-foot of the vessel. Should this situation appear likely to arise vessels are requested to attempt to keep the fore-foot submerged by transfer of water or bunkers, etc. If the hose becomes foul, it must be disconnected and towed clear causing considerable delay to the vessel.

During the hours of darkness it is requested that searchlights from bridge wings and approved floodlights be used to illuminate the surrounding water to facilitate detection of oil and assist generally in loading operations. Vessels are advised that failure to supply sufficient lighting could result in cargo operations not being allowed during the hours of darkness. Such delay would be for the ship's accounts.

After the ballast tanks have been inspected and found to be satisfactory, deballasting will commence on the advice of the Company Representative. When all the ballast has been discharged, the tanks will again be inspected and if ready for cargo a dry certificate, if presented, will be signed by the Company representative. In any case, cargo will be loaded when both ship and shore are ready to commence operations. In no circumstances will the vessel be expected to load at a faster rate than that requested by the Master. It is the ship's responsibility to check that the requested loading rate is not being exceeded. The Company for their part will make every effort to maintain the requested rate and will advise of any alteration of loading rate immediately; prior warning being given if circumstances permit.

Simultaneous Deballasting and Loading: In order to reduce the turn around time at this Terminal, but with close attention to safety, vessels will be permitted to load cargo and discharge ballast simultaneously, provided that no contamination of cargo or pollution of the Terminal waters can occur. Vessels desirous of adopting this method of loading can do so, but will be required to advise the Company in writing, stating that the vessel accepts full responsibility if this method of loading results in contamination of cargo and/or pollution of the Terminal waters.

Throughout the deballasting and cargo operations, a deck officer must be on deck with sufficient crew members to safely handle the operation. Company representatives will be on board throughout to co-ordinate terminal and marine operations and will be in constant communication with the terminal by portable and/or ship's VHF sets. Before loading commences the amount of cargo required must be given to the Company Representative in writing and the Terminal will, in conjunction with the vessel, arrange to stop the flow of cargo at this predetermined figure.

THERE ARE NO FACILITIES AVAILABLE TO DISCHARGE EXCESS CARGO SHOULD THE VESSEL OVERLOAD.

The Company Representative will advise on the detailed procedure for shutting down and disconnecting, but briefly, after cargo is completed and oil has ceased to flow, loading valves on the shore and Berth Operation Platform (BOP) will be closed. Then and not before, the vessel's manifold valves may be closed.

Do not close ship's valves against incoming oil as such procedure creates excessive pressure which may damage hoses, terminal facilities, or ship's piping.

Figures taken after completion will be passed to the shore by VHF and a ship/shore difference obtained. On request, full sets of cargo papers will be prepared and delivered to the Master as speedily as possible. However the briefer form of documentation is used at this terminal, and the remainder of the documents will be forwarded by airmail. At the same time the Company will arrange clearance for the vessel.

Loading signal to be displayed is the International Code flag "B" from a conspicuous halyard during the hours of daylight. During the hours of darkness a red light visible all around the horizon at a distance of at least one mile is to be exhibited.

REPAIRS: No facilities of any kind are available at this port.

Under no circumstances are engine repairs or the immobilisation of main engines permitted within the port limits.

REPATRIATION: Not permitted except in grave emergency and then only if the person concerned holds all the necessary valid certificates and documents, e.g. valid Smallpox, Cholera and Yellow Fever Certificates.

WEATHER AND CURRENTS: Wind and swell are mostly from a South-westerly direction. The weather is generally good from November to May, but is unfavourable during the wet season, i.e. May to November. For approximately 75% of the year the current sets in a N.N.W. direction and for the remainder of the year it is reversed, i.e. S.S.E. The strength of the current varies from 0.5 to 1.5 knots, and the currents frequently reverse direction very quickly causing the vessel to yaw (swing) heavily at the berth.

FRESH WATER: Not available.

FUEL: Not available.

MEDICAL: Not available except in an emergency.

STORES: Stores are not available at this Terminal and urgent spares/equipment forwarded by air can take up to three (3) weeks to clear formalities. In view of this it is essential that Gulf be advised of the airway bill number at the earliest opportunity to avoid further delays.

NATIONAL FLAG: Available from the Company.

GENERAL: In view of the exposed location of the berths, the Mooring Master and pipe-line gang will have to remain on board throughout the vessel's stay at the berth and, therefore, it will be necessary for the vessel to arrange food and accommodation for this period. A pipe-line gang will usually consist of four men, but this number may be varied at the discretion of the Company.

It is assumed that the Mooring Master will be accommodated in the Pilot Room; but where such a room does not exist on board, then accommodation equivalent to a minimum standard required for a Senior Officer is to be provided. In the case of meals, due allowance and provision is to be made for the fact that irregular hours of work by day and night may be involved.

TIME: Local time is GMT plus one hour throughout the year.

SHORE LEAVE: In view of the isolated positions of the buoy moorings (approx. 15 and 19 miles from shore) Masters are strongly advised not to grant shore leave. The weather and swell conditions could result in persons being injured either embarking or disembarking from the vessel, and in addition the boat journey will take approx. 2-2.5 hours. Should the weather deteriorate, it could mean delay to the vessel as outward clearance would not be granted until all the crew were on board the vessel. As the terminal does not own any suitable boats, it would be necessary for the vessel to charter one for shore leave purposes.

In view of the foregoing, the terminal does not recommend shore leave being granted.

AUTHORITY: Gulf Oil Company (Nigeria) Limited.

FORCADOS (Offshore Terminal): 05.10 N. 05.10 E. (See Plan Book)

DOCUMENTS:

Port Health:

4 copies Crew List.
3 copies Vaccination List.
3 copies Maritime Declaration of Health.
5 copies List of Last Ports of Call (6 weeks).
4 copies List of Animals and Birds.
4 copies Passenger List.

Customs:

1 copy Crew List.
1 copy List of Last Ports of Call (6 weeks).
2 copies List of Animals and Birds.
1 copy of Passenger List.
1 copy Stores List.
1 copy Personal Effects List.
2 copies Arms and Ammunition List.
1 copy Clearance Last Port.

Agent:
2 copies Crew List.
2 copies List of Last Ports of Call (6 weeks).
2 copies Passenger List.
Vaccination booklets for all crew members to be produced.
Deratisation Exemption Certificate to be produced.

APPROACHES: An efficient sounding machine and a high definition radar will assist in making the terminal for the first time. A heavy cluster of radar echoes from the Escravos area may be recorded on passing the 100-fathom line. On making the 20-fathom line, it is reported that the coastline from North Point to Moore Point and from South Point to Ajamabri shows on the radar screen with good chart comparison.

Once the vessel's position is ascertained and the course for Forcados adopted, the first and most obvious sighting, at night, will be that of the platform, which is marked with numerous fixed lights at several levels. The platform, which also serves as a helicopter platform, is in close proximity to the two SBM's.

PILOTAGE: Berthing Master will board vessel on arrival or at anchorage, and remains on board throughout. Contact Berthing Master on VHF Channel 8. Call sign "Forcados Pilots". *N.B.*: Also contact "Forcados Terminal" on Channel 8 immediately on anchoring to ensure that vessels arrival is recorded and that berthing turn will be in correct sequence.

ANCHORAGE: 3 miles West of or 2 miles N.W. of Production Platform in position 5° 10′ 17″ N. 5° 10′ 42″ E.

Vessels must not proceed inshore from these positions without a Pilot. When at anchor a listening watch is to be maintained on Channel 8 and this Channel must not be used for ship-to-ship exchanges.

Note: A 14-mile 48 in. pipe-line extends from the coast at South Point near Forcados to the manifold Platform and hence to the SBMs. Vessels are warned not to anchor in the vicinity of the pipeline.

RESTRICTIONS: Vessels berth at any state of tide, night or day.

MAX. SIZE: Min. size 45,000 tonnes. Max. size 254,000 tonnes. Max. freeboard during loading 60 ft. No restriction on length and beam. Max. draft 65 ft.

PRATIQUE: Health and Customs Officers board at a convenient hour come from Forcados, 20 miles distant from the buoys. Normally travel by high-speed launch, but may occasionally use helicopter.

RADIO: ETA to be given via Lagos Radio, 72 hours before arrival and re-confirm 48 hours before vessel's ETA at the terminal anchorage.

TUGS: No tugs required and none available.

BERTHING: Effected under guidance of Berthing Master and/or local assistant who both remain on board throughout loading operations. Accommodation for both to be provided. Whilst berthed a mooring rope must be ready on the poop deck so that the mooring launch (line boat) may, in the event of the vessel riding up on the SBM, make fast and tow to realign vessel.

There are two SBMs each fitted with two 15 in. nylon moorings and 1 hose string 840 ft. long with 2×16 in. end hoses. No. 1 SBM is South of platform and No. 2 is West.

Position of hose connections: Amidships port or starboard side depending on seasonal conditions. Vessels should endeavour to present 2×16 in. (400 mm.) (150 ASA) connections on arrival. Ship's crew are required to connect and disconnect the hoses under the advice of the Berthing Master and/or his assistant. A derrick, SWL at least 7 tonnes, must be rigged ready on both sides and plumbed clear of ship's side. Derrick runner must be equipped with suitable hook.

Weight of Hoses: Indication only of approximate weights 16 in. I.D. hose strings in tonnes (including fittings, floats, and pick-up buoys) with all hoses full of crude oil SG 0. 850. Assumed lift is 7.6 m. (25 ft.) above deck level, with vessel in light draft condition.

d.w.t.	tonnes
200,000	8.9
100,000	8.1
70,000	7.3
50,000	7.0
35,000	6.9

Loading: Load-on-top system operates at Forcados but slops cannot be accepted ashore. Maximum loading rates 11,000 t.p.h.

A single grade of crude oil is handled which is known as "Forcados Blend".

Shore Line System: Vessels load through SBM from shore through 48 in. line to SBM. The 48 in. submarine line to the SBM is some 14 miles in length, therefore great care must be exercised during loading when ships valves are manipulated to avoid pressure surges. Pressure recorders are normally fitted at the spool piece between ships manifold and tail end of the hose string to monitor pressure changes generated on board the vessel.

MEDICAL: No facilities for medical attendance but assistance may be given only on an emergency basis.

FUEL: Not available.

FRESH WATER: Not available.

DENSITY: Approximately 1025.

REPATRIATION: No crew changes possible.

SHORE LEAVE: Not permitted.

GENERAL:

Loading: Ships are required to load cargo as rapidly as possible by day and night in accordance with the terms of their charter parties.

This means that ships are expected to load as fast as Shell-BP can supply or they can safely receive. The question of how fast a ship can load is the responsibility of the Master having regard to his Owner's instructions, the charter party and the experience of ships' personnel. However, as further guidance, and in absence of any instructions to the contrary, ships are expected and nominations of vessels are accepted by Shell-BP on the understanding that ships will be able to accept a bulk loading rate per hour of not less than ten per cent of the summer deadweight of the vessel.

At offshore berth the Berthing Master acts as Loading Master during Loading Operations and is provided with "walkie-talkie" radios to ensure adequate ship/shore communication.

Loading Masters visit each vessel, and Masters are requested to co-operate in the completion of the Shell-BP Tanker Port Performance Time Sheet by ship and shore personnel at all Terminals. Only crude oil is handled at Shell-BP terminal, loading temperature and specific gravity of the grade of crude. Forcados Blend is reasonably constant and is approximately: 0.856 at loading temperature.

Immobilization of engines: Not permitted at SBMs. Not advisable at sea anchorages as many obstructions if vessel drags anchor.

Restrictions which may cause delays: Weather. Worst period June–September when heavy swell may be encountered.

Early departure procedure: A modified early departure procedure is in operation at Forcados offshore terminal. Masters are requested to sign all documents in blank, retaining in their possession Master's consignees copies. On completion of loading, the Berthing Master will supply Masters with a copy of the figures required for the completion of the retained documents. Masters are requested to complete these before the departure of the vessel. Customs and agency representatives will normally board vessels during daylight hours. Depending on other commitments of the offshore launch, it may be necessary to request masters to provide temporary accommodation for these officials.

WATCHMEN: Whilst berthed at an SBM, a security watch must be kept on the forecastle head by member(s) of the ship's crew throughout the hours of darkness and advise Berthing Master on the approach of local small craft.

SHIPMASTER'S REPORT: The SBM's are situated about 11 miles offshore.

Moorings: Starboard derrick topped and doubled up. If accommodation ladder rigged then on port-side. Not necessary for vessels up to 50,000 d.w.t.

Hoses: All sizes of reducers available.

TERMINAL OPERATOR: The Shell-B.P. Petroleum Development Co. of Nigeria Ltd.

LAGOS (including Apapa and Tin Can Island): 06.27 N. 03.24 E.

DOCUMENTS:
7 Ports of Call Lists.
5 Crew Lists.
5 Kroo Boy Lists.
2 Animal Lists.
2 Arms and Ammunition Lists.
9 Manifests.
2 Summaries.
1 Extra Manifest for Trans-shipment Cargo.
3 Stores Lists.
2 Crew Declaration.
2 Inward Reports.
2 N.P.A. Master's Declaration.
2 N.P.A. Ship's Particulars.
1 Customs Clearance.
1 Declaration of Health.
1 Vaccination List.

PILOTAGE: Compulsory. Hoist "G" flag. Agent to give notice of ETA to Harbour Master as early as possible. Contact Pilot by VHF Channel 16. No pilot boat stationed outside. 24 hour service available.

ANCHORAGES:

	Length	*Draft*
Pool 1	480 ft.	24 ft.
Pool 2	600 ft.	28 ft.
Pool 3	450 ft.	26 ft.
Pool 4	450 ft.	26 ft.
Badagry Creek	380 ft.	22 ft.

Vessels not permitted to remain at anchor at Pool 1 during hours of darkness due to poor holding ground.

4 vessels, maximum length 380 ft. can anchor at Badagry Creek Anchorage. Max. draft 22 ft.

RESTRICTIONS: Draft only. Vessels of more than 600 ft. LOA are not allowed to be brought into the port. Depth over bar 9.14 m. at LW.

MAX. SIZE: See "Berthing".

HEALTH: Port Health Officer boards vessel on arrival. ETA's must be advised by ship or Agent direct to Port Health. Pratique automatic when from Nigerian port. Also see "General".

RADIO: Messages routed through Lagos Radio.

Continuous VHF watch on Channel 16 maintained in Harbour Master's office. Contact Signal Station by VHF Channel 16.

TUGS: No specific joining position, depending on tide and on Pilot's request, otherwise close to berth. Normally ship's line used. 2 tugs 1,280 h.p., 3 tugs 1,490 h.p. and several smaller for towing lighters. 24 hour service available. Also see "General".

BERTHING: Cargo for Apapa and Lagos should be stowed separately on all liner ships as the Apapa wharves have rail connections to the North, and the customs wharf only receives cargo for Lagos locally.

No specific arrival time is required for berths, except for Petroleum Wharf where tankers need high water. Berthing on ebb tide required for Fish Wharf and Ijora Wharf:

Berth	*Max. Length (m.)*	*Max. Draft (m.)*
No. 1	152	8.23
No. 2	142	8.23
Nos. 3, 4, 5, 7, 9, 10, 11, 12 and 13	152	8.23
No. 6	183	8.23
No. 7A	122	8.23
No. 14	220	8.23
Lighter Berth	116	4.88
Fish Wharf	85	5.79
B.O.P. (Lever Bros.)	152	7.62
P.W.A. (for ocean going tankers)	177	7.62
P.W.A. (Inner – for coasters)	96	4.88
Ijora Wharf	122	5.79
Anchorage No. 1 pool	146	7.32
Anchorage No. 2 pool	183	8.53
Anchorage No. 3 pool	137	7.92
Anchorage No. 4 pool	137	7.92
Marine Mooring Buoy No. 1	152	7.92
Marine Mooring Buoy No. 2	140	7.92
Marine Mooring Buoy No. 3	140	7.93
Marine Dolphin Buoy	76	5.79
Plus 22 Mooring Buoy Berths		
Berth 15, 16	250	11.50

Tin-Can Island Port, Lagos: Tin-Can Island Port (TCIP) is situated N.W. of Apapa, North of Badagry Creek. TCIP was opened in October, 1977 is self-contained operational unit with 5,000 kw. diesel generating station.

Accommodation: Area 73 hectares, quay length of 2.5 km. Extensive quay apron 40 m. wide with berthing capacity for 10–15 vessels depending on size of vessels.

Roll-on/Roll-off facilities: Bulk berth for handling bulk commodities. Two service berths for tugs and light crafts; quayside depth of 11.5 m. below mean Springtide water level (MSLW), although ultimate depth will be 13.5 m.

Dredged Channel is 200 m. wide with Turning Basin.

Two fresh water wells (250 m. deep) with purification plant.

Ten quayside cranes – 8 of 6,000 k. at 28 m. radius, 2 of 10,000 k. at 25 m. radius, transit sheds and warehouse each of 7,000 sq.m. area.

CRANES: 35 quay cranes from 2.5 to 5 tonnes capacity; 2 floating cranes of 50 and 100 tonnes capacity; 77 mobile cranes from 6 to 50 tonnes capacity; 307 forklift trucks; 93 tractors; 5 freight lifters; 16 conveyors and 188 trailers.

STEVEDORES: Available. First shift: 0730–1530 hrs.; 2nd shift: 1530–2330 hrs.; 3rd shift: 2330–0730 hrs. Overtime is paid for extra duty.

MEDICAL: Agents to be given advance notice of medical attention required as early as possible. Hospital facilities available. International Certificates of smallpox and yellow fever required.

TANKERS: One berth operated by the Port Authority. Length 177 m. Max. draft 7.62 m. No night berthing. Water and bunkers available. (Subject to tidal restriction).

DENSITY: 1012.

FRESH WATER: Delivery by barges at between 20 to 40 t.p.h. Advance notification needed.

FUEL: Fuel oil available, coal bunkers obtained from Ijora Wharf. A guarantee of sufficient bunker to last the period of stay on a berth will be one of the conditions to be satisfied before a vessel is allocated a berth.

FIRE PRECAUTIONS: Tankers and vessels with explosives: fireboat always in attendance with fire-control depot ashore working in conjunction with the Harbour Master on VHF Channel 16. Port area tugboats also equipped for fire fighting.

GANGWAY/DECK WATCHMEN: Advisable, available if required.

OPENING/CLOSING HATCHES: Stevedores/crew.

CUSTOMS ALLOWANCES: Tobacco allowance: 200 cigarettes per person, re-issue after 8 days. Wine/Spirit: 1 part bottle, re-issue to officers after 4 days.

IDENTIFICATION CARDS: Passports or identity cards.

CONSULS: Most countries maintain Embassies/High Commissions or Consuls.

REPAIRS: Major repairs available.

DRY DOCKS: Authority maintains large, well-equipped dockyard, which, while primarily for maintenance of Authority's own fleet, provides facilities to commercial interests. In installation is modern floating dock which has lifting capacity of 4,000 tons. Max. draft 18 ft. Synchro-lift available lifting capacity 100 tons max.

In addition to facilities offered by Authority's dockyard, major shipping agencies in port maintain dockyard installations, including slipways for raking smaller vessels and lighters; can provide first-aid repair for main line vessels.

Bull Nose – No. 1 – can accommodate a vessel of 380 ft. in length and max. draft 16 ft. 6 in.

Bull Nose – No. 2 – can accommodate a vessel of 250 ft. in length and max. draft 16 ft. 6 in.

REPATRIATION: Facilities available for effecting crew changes and arranging any necessary repatriations.

AIRPORT: Ikeja 14.4 km. from port, served by regular airlines.

TIME: GMT plus 1 hour.

HOLIDAYS: Fixed: New Year's Day (1st January); National Day (1st October); Christmas Day (25th December); Boxing Day (26th December). Variable: Good Friday; Easter Monday; Eid-El-Fitir Festival; Eid-El-Kebir Festival; Maolud Nabiyyi (Mohammed's Birthday). Port closed on National Day, Good Friday and Christmas Day.

POLICE/AMBULANCE/FIRE: Police Apapa 45798, Lagos Custom 20030; Ambulance Apapa 41341/227; Fire Apapa 41741, Lagos Custom 20777, General Emergencies 199.

TELEPHONES: No arrangements for telephones on board.

SERVICES: Small services available.

SHORE LEAVE: Crew members allowed ashore after clearance by Port Health and Immigration Authorities.

DEVELOPMENTS: *3rd Wharf Extension*: There is a 1,500 m. long quay under construction with 6 berths, some for container traffic and Ro/Ro.

GENERAL: Notice issued by the Harbour Master in May, 1976: Will all ships' Agencies note that from the date of this circular letter, Lagos Radio has been instructed to reject any telex messages from any ship addressed to the Harbour Authority unless the itemised particulars are included:

(a) Ship's name.
(b) Ship's call sign.
(c) Ship's Agent's name.
(d) Ship's length overall.
(e) Ship's tonnage loaded.
(f) Ship's draft.
(g) Nature of cargo (i.e. cement, general cargo, etc.).
(h) Last port of call.

Notice issued by the Nigerian Federal Ministry of Health in May, 1976:

Please communicate to all Masters that request for radio pratique either by international sanitary codes or otherwise must state clearly the following:

(a) Last port of call;
(b) number of crew;
(c) vaccination and inoculation of crew;
(d) date and time of arrival;
(e) condition of ship;
(f) number of passengers onboard;
(g) name of Agent.

AUTHORITY: Nigerian Ports Authority.

AGENT: Alraine (Nigeria) Ltd., 26 Creek Road, Apapa, Lagos. P.O. Box 265. Tel. 47 770. Cables "Freight Lagos". Telex 21244.

PENNINGTON OFFSHORE TERMINAL:

04.15 N. 05.36 E. **(See Plan Book)**

All vessels required fly Nigerian Ensign on foremast.

OPERATORS: Texaco Overseas (Nigeria) Petroleum Company.

LOCATION: The floating storage vessel, designated as "Special Purpose Vessel (SPV) 367001", is a 367,000 barrel storage hulk fabricated from the forebodies of 2 tank vessels and is approximately 740 ft. in length. The SPV is moored to SPM-A, one of two single point mooring berths:

1. SPM-A is located approximately 20 miles off the mouth of Fishtown River in a position
Lat. 4° 14′ 35.2″ N.
Long. 5° 36′ 53.2″ E.

2. The Export Tanker Buoy (SPM-B) is capable of accommodating vessels up to 250,000 d.w.t. and is located at
Lat. 4° 15′ 0.0″ N.
Long. 5° 36′ 10.5″ E.

on a bearing of North 60° West and a distance of approximately 5,000 ft. from SPM-A. The minimum water depth at SPM-B is approximately 88 ft.

APPROACHES: Incoming tankers should make their terminal approach from a westerly direction to a point not less than 2 miles seaward of the Export Tanker Berth. At this location the Mooring Master will board the vessel.

DOCUMENTS: Following documents required by Customs and Health Officials.

Last Port Clearance.
1 copy Vaccination List.
1 copy Stores List.
1 copy Crew Declaration.
4 copies Crew List.
4 copies Passenger List.
4 copies Animal List.
4 copies Ports of Call (last 6 weeks).
2 Arms and Ammunition List.
24 copies Notice of Readiness.
24 copies Dry Tank Certificate.
24 copies Ship's Ullage Report.

Government officials representing various departments may, at their discretion, board the vessels in the Terminal area.

PILOTAGE: (see "Approaches") The Company Mooring Master, together with Customs Officials will board incoming vessel about 2 miles seaward of the Terminal Export buoy. Vessel's Master will be advised on approach to the berth details in respect of mooring, unmooring, connecting and disconnecting hoses, loading operations and departure from the berth.

Vessels requested to have pilot ladder safely and securely rigged for immediate use, and long enough to reach the Mooring Master's launch. A light line should be ready to take on board the Mooring Master's radio and/or briefcase.

The Mooring Master will remain on board during loading operations and he will be in direct control of all ship communications while in Terminal area.

MAX. SIZE: Max. d.w.t. 250,000 tons.

RADIO: All vessels to be loaded at the Terminal must cable ETA to "Topcon, Lagos", 96 hours and 24 hours prior arrival. The Company in Lagos will then notify Senior Mooring Master on board Special Purpose Vessel.

Ship to "SPV 367001" communication, while vessels are in the export tanker berth will be by portable VHF radio-telephone units, provided by Terminal . The Company Mooring Master will advise ship's Master regarding emergency whistle signals set up for use in event radio-telephone units become inoperative. Use of ship's radio station and/or battery charging is prohibited while loading is in progress.

VHF: As soon as possible prior to arrival, vessels should establish direct communication with the Terminal (SPV 367001) on VHF International Calling Channel 16 (156.8 mHz).

TUGS: *SPM Vessels:* The Terminal will have available 2 line handling vessels and one SPM-Hose maintenance vessel. These 3 vessels are under the control of the Mooring Master and are used to assist the mooring of the Tanker as required. These service vessels are not available to the Tanker for any other work.

READINESS: The Company will make every effort to load vessels upon arrival, or as promptly as berth is available, weather permitting.

"Notice of Readiness" will be accepted as at time of arrival, provided vessel is in all respects ready to load. Arrival time will be considered as at time Mooring Master boards vessel, or time vessel anchors off the terminal, which ever occurs first.

Mooring Master may reject a vessel if in his judgment she is not properly equipped or suitably manned, or if, upon inspection, he deems her to have dirty ballast or tanks unsuitable for cargo. However, Company will not issue any certificate or representation purporting to state that vessel's tanks, pipes and pumps and appurtenances are clean or acceptable for receiving cargo nor will the Company assume any responsibility for "contamination of cargo aboard ship caused by condition of ship's tanks, pipes, pumps or appurtenances".

The vessel shall have in readiness 2 nylon ropes with a minimum diameter of 2 in., each approximately 200 ft. long and each terminated with 2×2.25 in. joining shackles to attach and retrieve the SPM mooring lines.

Vessels must be adequately equipped with blocks, tackle and booms to hoist the floating hose string in a safe, efficient and expeditious manner. Vessels must also have an adequate supply of nuts, bolts, gaskets and wrenches to connect cargo hoses system.

BALLAST: Absolutely no provision is made for dirty ballast. Vessels with dirty ballast will be rejected and all costs therefrom will be to the vessel's account.

It is the Ship Master's responsibility to see that no oil or oily ballast is pumped or spilled overboard. Drip pans must be used at all times and all scuppers must be plugged. The waters in and adjacent to the Terminal must not be polluted, and only clean oil-free ballast and/or bilge water may be discharged at the Terminal.

As soon as practicable after arrival, and prior acceptance for loading, all vessel's tanks will be inspected for evidence of oil in ballast, and during discharge of ballast, similar inspections will continue. If evidence of oil appears at these inspections, the vessel may have to vacate berth. Upon return, vessel will be obliged to tender new "Notice of Readiness".

If, during first inspection or during process of loading it is revealed that vessel's tanks are not oil-tight, she will be rejected, or refused further loading.

In addition to lights usually displayed, vessels discharging ballast or loading cargo during darkness will illuminate area around the ship to satisfaction of Mooring Master, in order that any oil on the surface of sea may readily be detected and appropriate action taken. Vessels unable to illuminate sea satisfactorily may not discharge ballast during darkness. Vessels should provide suitable floodlights for working on deck during night operations.

In the event any vessel should accidently discharge dirty ballast or spill oil in the vicinity of the Terminal, the Company shall have the right to take any action that may be necessary to clean up or remove any contamination or pollution resulting from such discharge of dirty ballast or spillage. In addition, the Company shall have the right to settle any claims of third parties arising from such contamination or pollution. All costs and expenses incurred by the Company to carry out the cleaning up of such contamination or pollution or the settlement of third party claims, shall be the joint and several liability of the Vessel, its Owners and Managers, and the Company shall be entitled to claim reimbursement accordingly in any jurisdiction.

Vessels properly equipped will be encouraged to discharge clean ballast and load simultaneously.

BERTHING: All manoeuvring within loading berth area is to be done only in accordance with advice of Company Mooring Masters, subject to understanding that in all cases and circumstances Master of vessel being manoeuvred shall remain solely responsible for safety and proper manoeuvring. Vessel's Master or a qualified Deck Officer must be on bridge at all times during manoeuvring.

EXPORT TANKER BERTH FACILITIES: The Export Tanker Buoy is a conventional SBM which is 10 m. in diameter and held in position by 6 chains secured to piles sunk in the seabed. Two mooring hawsers and a single floating hose string extends from the buoy.

CONNECTING MOORING LINES: When the Vessel is within reasonable distance of the SPM-B, 1 ship's line will be carried by a line handling launch to the floating buoy line and secured. This line will then be heaved aboard. As the buoy ropes come clear of the water it will be noted that chains are attached to them. One chain is to be secured to the bits in such a manner that the nylon is outside of the extreme length of the ship; i.e. so that the chain will absorb any chafing if the buoy line crosses the bow. There are 2 buoy lines. Power must be available at all times on all winches and windlass while Vessel is at the berth.

LOADING: During loading, the International Code Flag "B" shall be displayed from top-mast signal halyard during daylight hours. During hours of darkness, a red light shall be displayed, visible at a distance of at least 1 mile, and showing unbroken light all around the horizon.

Raising, connecting, disconnecting and lowering of submarine hoses will be performed by vessel's crew under direction and supervision of an appropriate vessel's Officer as advised by the Mooring Master, who will remain on board while the vessel is in moorings.

After vessel securely moored the floating hose will be lifted to rail amidships. The weight of the lift is approximately 5 tons and is lifted with vessel's gear on starboard side. The Mooring Master advises vessel's personnel in the lifting, connecting, disconnecting and lowering of the hose system. A vessel's Deck Officer must be present, and direct the crew in all hose handling. There must be sufficient crew on deck to perform this work.

The vessel's Master is responsible for own vessel at all times. The max. loading rate is about 15,000 b.p.h. and Company mooring Master will advise in respect to loading pressures and hazards, but will not direct loading except as may be necessary to protect Terminal facilities. Manipulation of vessel's valves is direct responsibility of vessel's personnel.

Prior to commencement of loading, Chief Officer will assure the Mooring Master that sea suction valves are *closed* and he will make note to that effect in Mooring Master's log before cargo loading started. Final ullaging and computation of cargo will be done by an Officer of the vessel who will hand this information to Mooring Master for transmittal to Officer in charge on board "SPV 367001" for use in comparing metered-out cargo.

Caution. – The incoming oil stream is controlled on board the "SPV 367001" and it is extremely dangerous to close a cargo valve against the incoming stream. Such a procedure creates excessive pressure, which may damage hoses, piping or Terminal facilities. Vessels will be held liable for damages resulting from failure to observe this precaution.

Emergency Signal. – When normal ship-to-"SPV 367001" communications fail, the emergency signal to stop the flow of oil will be a continuous blast on the whistle until oil ceases to flow. Steam or air should never be shut off from the whistle during loading. Whenever emergency whistle is used, all loading operations will be shut down until communications can be re-established.

Terminal Stops. – Request for the Terminal to stop the flow of cargo at a predetermined tonnage must be made in writing. Requests must include statements that the Company will not be held responsible for any error and in case of overloading, the excess cargo cannot be pumped back to the "SPV 367001". Some delays are always incurred when such a shore stop request is made.

SAFETY: Vessel's personnel responsible for safety of vessel, and must take all necessary precautions whether or not so advised by Mooring Master. Any safety precautions imposed by Company Mooring Master, and so disregarded by ship's Officers or Crew, will be considered just cause for rejection of vessel and all expenses and liabilities related thereto will be for account of the tanker.

Not less than 1 Deck Officer and 3 seamen shall be available on deck at all times while vessel in moorings.

Power must be available at all times on deck winches and windlass while vessel in moorings.

Presence of unauthorized craft alongside is extremely hazardous and Masters are requested to require all unauthorized craft to clear vessel's side prior to ballast pumping and cargo loading.

Mooring Masters are authorized to shut down loading operations during severe electrical storms, if another vessel or craft of any description comes alongside the loading vessel, and under any other circumstances which imperil loading operations.

MEDICAL: Medical assistance on an emergency basis only.

REPAIRS: No facilities of any kind are available. Pennington Offshore Terminal is considered an open roadstead and under no circumstances may engines be shut down for repairs while a vessel is moored in the Export Tanker Berth. The Vessel must be able to depart from the berth immediately on instructions to do so.

WEATHER/CURRENTS: Wind and swell are mostly from a Southerly direction. The weather is generally good from November to May but is unfavourable during the wet season months of May to November. The currents are irregular and at times strong. The Mooring Master will provide the Master with this information when boarding the vessel.

FRESH WATER: Not available.

FUEL: Not available.

STORES: Not available.

REPATRIATION: Not permitted except in grave emergencies.

SHORE LEAVE: Not permitted.

GENERAL: Cargo inspection services are available from E. W. Saybolt and Co. S.A. who have offices in Lagos. The use of this service will be for account of vessel or Consignee.
AGENCY: The Company does not perform general agency functions. Owners of vessels calling at the Terminal may arrange for their own Agents, although due to the location of the Terminal there are no Agent's offices in the area. For this reason the Company will arrange for the minimum agency service necessary to document and clear vessel and export cargo through Nigerian Customs. Costs of this Agency service will be charged back to appropriate parties.

PORT HARCOURT (incl. Okrika): 04.46 N. 07.00 E.

DOCUMENTS:
9 Crew Lists.
9 Passenger Lists.
6 Arms and Ammunition Lists.
6 Livestock Lists.
7 Ports of Call Lists.
2 Bonded Store Lists.
3 Vaccination Lists.
10 Manifests.
2 Bills of Lading.
2 Crew Declaration (Special Lists).

PILOTAGE: Compulsory from Bonny Fairway buoy, 24 hour service. The Pilot Station for Port Harcourt is at Bonny, 15 miles from Fairway Buoy, 28 miles from Port Harcourt. The Harbour Master keeps watch on VHF Channels 16 and 14 and on 2182 from 0700 hrs. to 1800 hrs. As there presently is no radio station at Port Harcourt Masters should cable their Lagos Agent with a 48 hours ETA asking the Lagos Agent to pass the information to Port Harcourt. Pilot boards at Fairway Buoy from pilot-cutter green hull, stone colour superstructure.

Position of Fairway Buoy: 4° 12′ 56″ N., 7° 00′ 28″ E.

It should be noted that Bonny is an Oil Terminal and as such heavy traffic of tankers is continuous. In extreme circumstances vessels may be requested by Harbour Master to pass the channel from Fairway Buoy at Bonny, and anchor at Bonny without a Pilot, in which case latest Notices to Mariners should be studied in order not to damage oil pipe-lines in prohibited anchorage areas.
ANCHORAGES: Position West of Fairway Buoy, depths 8–9 fathoms.
RESTRICTIONS: Night pilotage available for tankers at Bonny only. Vessels for Okrika and Port Harcourt can only navigate during daylight.

Bonny channel is 11.73 m. deep and Okrika is 9.14 m. deep at Chart Datum.
MAX. SIZE: Max. draft is 7.62 m. at HW, minimum depth in approaches 5.49 m. Datum. Max. length 600 ft., no restrictions on beam. Ebb tide reaches a max. of 3 knots off the berths and 2.5 knots in the river, flood tide 2.5 knots off berths and in the river.

Berth No.	*Length (m.)*	*Max. Draft (m.)*	*Remarks*
1	158	7.92	
2	158	7.92	
3	158	7.92	
4	110	7.92	
5	128	7.92	
6	134	7.92	
7	134	7.92	
8	137	7.62	Coal berth with conveyor to storage hoppers.
9	143	7.62	B.O.P. berth for loading palm oil by direct pipe-line and unloading explosives.
10	137	6.71	Kidney Island.
11	137	6.71	Timber Buoys.
12	107	6.55	Pool Anchorage.
Lighter Berth	8	1.83	
Tanker Buoys	244	6.71	

HEALTH: Q-flag to be shown on arrival, except if from another Nigerian port, Yellow fever and smallpox inoculations compulsory. In case of suspected disease on board, advance notice to Agent advisory.
TUGS: One tug available, 1,490 h.p.
BERTHING: *Main Quay:* The main Quay is 3,459 ft. long and capable of berthing 7 vessels.

The old quays at Port Harcourt have been completely reconditioned to enable them handle bigger ships. Dredging in front of these quays is in progress and when completed ships with drafts of up to 29 ft. will be able to use these berths.

B.O.P. Berth. This berth lies outside the Quay area, and is for the loading of palm oil by means of a direct pipe-line from the installation of Bulk Oil Plants (Nigeria) Limited. It consists of a central "T" jetty with dolphins and is capable of berthing vessels up to 480 ft. in length. It is also used for the discharge of explosives as such cargo is not permitted to be handled across the general cargo Quay.

Oil is supplied by a 6-in. diameter pipe at a maximum rate of 250 t.p.h.

Okrika Oil Refinery: Okrika lies on the Bonny River, 56 km. from the sea. The approach over the bar is by a channel 12.8 km. in length, dredged to a depth of 11.58 m. Chart Datum. The river from Bonny to Okrika has been dredged as necessary to a depth of 8.84 m. Chart Datum. The bar channel and river are well buoyed with light buoys, port and starboard. There are also beacons in the river. Jetty at the oil refinery suitable for berthing coastal and ocean tankers up to 33,000 d.w.t. The jetty is "L" shaped with a square dolphin at the end of the arm. Ocean tankers secure on the outside of the jetty making fast to two sets of mooring dolphins each end. The coastal vessels and barges are berthed on the inside of the jetty. Oil is supplied via gantry hoses on either side.

Max. draft limit for tankers sailing from port 9.75 m., draft for berthing 7.92 m.

Fresh water available from the jetty.

The tug based at Port Harcourt is available if required.

Pilotage is compulsory from the Fairway Buoy to the Refinery Jetty except for Naval vessesl and vessels of less than 1,000 tonnes whose Master holds a licence issued by the Nigerian Ports Authority. All vesels using the Refinery Jetty will berth and unberth on the flood tide only during daylight hours until further notice.

Radio message for vessels proceeding to Okrika are sent to Port Harcourt Radio after initial contact with Bonny Radio.

Coal handling facilities: Facilities for loading coal have been completed and a conveyor capable of loading about 60 t.p.h. is working. Max. draft at the coal berth is 7.62 m. This berth is situated at the Northern end of the Port, berth No. 8.
STEVEDORES: Gang requirements and hatch distribution should be included in 48-hours ETA cable to Agent. Discharging general cargo 8 tons per gang/hour, cement 15 tons per gang/hour, bagged cargo 20 tons per gang/hour, loading produce 15–20 tons per gang/hour.
MEDICAL: Doctors available 24 hours, but limited supply of medicaments. Yellow fever, cholera and smallpox vaccination required.
DENSITY: Appx. 1015.
FRESH WATER: No restriction, from barge (15 ton/hour). From quay low pressure, max. 8 ton/hour.
FUEL: Most standard lubricants available, fuel available by barge only. Requirements by 48-hours ETA cable.
GANGWAY/DECK WATCHMEN: Recommended.
OPENING/CLOSING HATCHES: Normally by crew.
CUSTOMS ALLOWANCES: 200 cigarettes per man per 7 days. 1 wine or 1 bottle spirits per officer per 7 days.
IDENTIFICATION CARDS: Crew to carry passport or seaman's book whilst ashore.
REPAIRS: Only very minor repairs available, no spares.
REPATRIATION: Possible via Lagos.
AIRPORT: Port Harcourt 11.2 km. from port. Twice daily flights to Lagos, no international flights.
TIME: GMT plus 1 hour, no changes during the year.
HOLIDAYS: See "Lagos".
POLICE/AMBULANCE/FIRE: All can be contacted by tel. 999.
SHORE LEAVE: Allowed provided crew carry passport or seaman's book.
DEVELOPMENTS: Four berths are planned on a new site at Port Harcourt.
SHIPMASTER'S REPORT: 1977.
The ETA for this port should be sent via Lagos Radio, but much earlier than 48 hours. Better as soon as possible, for communication between Lagos and the out-ports is poor.

The normal practice at the moment is that the Master enters the Bonny River himself after permission from Bonny Harbour Master. The anchorage position on Bonny roads is given by Harbour Master and vessel can proceed as far as buoy 1A. (A few miles up Bonny River).

Discharging at Port Harcourt not only occurs alongside, but from Dawes Island upwards to Port Harcourt. Ships are discharged while laying at anchor. No buoys available. The cement cargo ships especially are discharged this way.

At Dawes Island the Bonny River Pilot leaves the ship and is replaced by a Port Harcourt Pilot.

Tugs are not available for mooring.
AUTHORITY: Nigerian Ports Authority.
AGENT: Alraine (Nigeria) Limited, PO Box 622, Port Harcourt, tel. 8059, 8062, 8053. Telex Freight Lagos 21244 attention – Port Harcourt.

QUE IBOE: 04.20 N. 07.59 E. (See Plan Book)

LOCATION: The Terminal is located on the Eastern side of the estuary of the Que Iboe River in approximate position Latitude 4° 33′ 00″ N., Longitude 7° 59′ 30″ E.

The crude oil storage facilities consist of seven tanks each of 500,000 barrels capacity.
DOCUMENTS:
Crew Lists with passports and Certificates of Vaccinations available for inspection.
Stores List.
Crew Personal Effects List.
Manifest of Cargo.
Arms and Ammunition List.
List of Animals.
List of Ports of call during last 21 days.
If the vessel has a clearance for another port the deviation cable has to be shown to the Customs Officer.

PILOTAGE: Vessels loading at Que Iboe will be boarded by a Company Mooring Master either at the anchorage or where directed.

The Mooring Master will advise the ship's Master in regard to the approaches to the berth; and the mooring, unmooring, connecting, disconnection of hoses, departure from the berth and loading operations.

All vessels must have upon arrival a pilot ladder in good, clean condition safely and securely rigged. A vessel arriving with freeboard of 30 feet or more must use its accommodation ladder in conjunction with the pilot ladder unless a "pilot hoist" or similar arrangement is available.

In the event that a vessel is deemed by the Mooring Master to be improperly or insufficiently equipped with adequate mooring facilities, lines or gear, then he shall so inform the ship's Master. In such an event the vessel will not be brought into the mooring until satisfactory gear or equipment is provided.

ANCHORAGE: Numerous submarine pipe-lines and structures exist in the approaches and close vicinity of the loading berths.

Under no circumstances whatsoever should vessels anchor except in the approved anchorage described below.

The safe Anchorage Area is located two (2) miles Southeast the Berth operation platform (BOP) and clear of the SPM between the parallels of Latitude 4° 10′ North and 4° 13′ North and meridian 8° 03′ East and 8° 07′ East. Vessels bound for the Que Iboe Terminal should proceed with extreme caution from the Southeast to the safe Anchorage Area. If uncertain of the vessel's position because of poor visibility stay Southeast and clear of the safe Anchorage Area until visibility is good.

HEALTH: Pratique may be granted by radio (Lagos Radio). Quarantine officials board vessel at the berth.

MAX. SIZE:

Berth	Length	Beam	Draft
No. 1 (SM)	850 ft.	No Limit	45 ft.
No. 2 (SPM)	No restriction	No Limit	75 ft.

RADIO: Vessels proceeding to load at Que Iboe must radio:

1. MOBIL OIL, Lagos indicating their cargo requirements and ETA 5 days prior to arrival. When their passage time is such as to not permit a 5-day ETA then the maximum possible advance notice of arrival and cargo requirements must be given.
2. MOBIL OIL, Lagos, confirming or amending the ETA given in (1) above at 72 hours and 24 hours prior to arrival.
3. The Nigerian Government Port Health Officer at Lagos at least 72 hours before arrival advising the following:
   - (a) Vessel's name and call sign.
   - (b) ETA Que Iboe
   - (c) Approximate cargo tonnage to be loaded
   - (d) Number of crew and whether healthy or not
   - (e) Whether or not a doctor on board
   - (f) Requesting free pratique.

If the request for free pratique is granted the Port Health Officer will so advise th vessel by radio.

In addition, as soon as possible prior to arrival vessels should establish direct communication with the Terminal ("Que Iboe Control") on VHF international calling Channel 16 (156.8 mHz). After initial contact communication will continue on Channel 14 (156.7 mHz).

Vessels not equipped with VHF R/T equipment or whose equipment is not fully functional should advise MOBIL OIL, Lagos, at the time of their ETA messages previously referred to.

The (BOP) Berth Operation Platform is fitted with a racon and transmits the Morse signal "K" (—·—). All vessels equipped with 3 cm radar will be able to pick this up on their radar screen.

TUGS: None. Terminal launches assist in berthing.

BERTHING: The tanker loading facilities consist of two berths: No. 1 Berth: A 7-point spread mooring (SM) located in a position Latitude 4° 20′ 19″ N., Longitude 8° 00′ 11″ E., approximately 12 nautical miles South of the terminal tank farm. Depth of water at the manifold 65 feet.

No. 2 Berth: A single point mooring (SPM) buoy located in a position Latitude 4° 13′ 05″ N., Longitude 8° 02′ 45″ E., approximately 19.4 nautical miles S.E. of the terminal tank farm. Depth of water at the manifold 85 feet.

Vessels loading at Que Iboe will normally berth at the SPM. From time to time and at the discretion of the Mooring Master vessels of up to 80,000 SDWT will be berthed at the Spread Mooring.

All vessels must be adequately provided with bollards or cruciforms and suitable leads to facilitate the hanging off of the hoses during the lifting operation. All vessels loading at Que Iboe must have two bower anchors and a minimum of 10 working shots of chain attached to each anchor.

All vessels must be equipped with adequate on-deck and overside lighting. A spotlight should be rigged on the bridge when berthing during the hours of darkness.

To assist in the vessel's turnaround, tankers should have all booms and cargo gear rigged on the port or starboard side as advised by radio from the Terminal before the ship is boarded by the Mooring Master.

Berthing Requirements: No. 1 Berth. Vessels of less than 80,000 Summer d.w.t. should be equipped with booms, cranes or derricks to safely lift 12 inch and 16 inch I. D. hoses from a 65 ft. water depth. Submarine hose taken aboard on the starboard side.

Vessels must have at least eight (8) good ropes, preferably non-stretch synthetic lines, at least 120 fathoms in length. Three of the eight lines should be prepared at the after end of the main deck forward of the poop in the following manner: one line on each side of the ship and one in the centreline with the ends of the centre rope married to the inboard ends of the port and starboard ropes so that if necessary a double or treble length can be run on either side of the ship without delay. The other five ropes should be located on the poop deck. The use of nylon or other mooring lines having a high stretch factor should not be used in this berth.

Mooring buoys No. 2, 4 and 6 are provided with preventer wires. These preventer wires are to be taken aboard and secured as directed by the Mooring Master.

Anchor buoys should be attached to the bower anchors.

Berthing Requirements: No. 2 Berth. All vessels proceeding to the SPM must secure their anchors with chain stoppers or compressors. Floating hoses taken aboard on the port side.

The moorings have been designed in general accordance with the recommendations of the SPM Forum. The mooring lines consist of two 15 inch braided polypropylene strops each 160 ft. long.

In order to have the mooring lines aboard, the vessel should have ready on the forecastle a rope messenger at least 5.5 inches in circumference and a minimum length of 120 fathoms. The messenger is led through a fairlead, large enough to permit the entry of a 4.25 in. dia. chafing chain, on port side or centre line down to the water clear of the ship's bow. This messenger should have a good lashing attached to the eye.

The Terminal Launch crew then make this fast to a 300 ft.×10 in. plaited polypropylene buoy approach or pick up rope and then the ship is hove steadily towards the buoy until the chafing chain lies across the fairlead. The chafing chain then will be shackled to a heavy wire strop, which has been placed over a suitable set of bitts. The wire strops and shackle are provided by the Terminal and put on board as the ship approaches the buoy.

HOSES: *Tanker on Light Draft: Weights of hose strings for multi-buoy moorings:* Indication only of approximate weights of hose strings in *long tons* (including fittings) with all hoses full of crude oil S.G.0.850. Assumed total lift 25 ft. above deck level.

Water Depth in Berth (feet)

Size of Tanker	16 in. I.D.	70 ft.	60 ft.	12 in. I.D.	70 ft.	60 ft.
100,000 d.w.t.	Hoses	8.6	8.4	Hoses	5.1	5.0
70,000 d.w.t.	,,	7.8	7.6	,,	4.6	4.5
50,000 d.w.t.	,,	7.7	7.4	,,	4.5	4.4
35,000 d.w.t.	,,	7.5	7.2	,,	4.4	4.3
18,000 d.w.t.	,,	6.7	6.4	,,	3.9	3.8

Tanker on Light Draft: Weights of Hose strings for SPM: Indication of hose strings approximate weights of hose strings in *long tons* (including fittings and floats) with all hoses full of crude oil S.G. 0.850. Assumed total lift 25 ft. above deck level.

	Inside Diameter of Hoses	
Size of Tanker	16 in.	12 in.
200,000 d.w.t.	8.8	5.2
100,000 d.w.t.	8.0	4.7
70,000 d.w.t.	7.2	4.2
50,000 d.w.t.	7.0	4.1
35,000 d.w.t.	6.8	4.0
18,000 d.w.t.	6.0	3.6

LOADING: The Mooring Master will inspect the vessel's cargo tanks and will sign the dry certificate prior to the commencement of loading.

Hose connection and disconnection must be carried out by the ship's crew under the supervision of a suitable qualified Officer acting on the advice of the Mooring Master.

Ship's loading manifolds should be prepared for two 12 inch hose connections prior to arrival at the Que Iboe Terminal. Sundry equipment should include tools to connect the hoses, nuts, bolts, gaskets and rope strops as none of these items are supplied by the Terminal. All 12 inch hoses have ASA flanges.

The Notice of Readiness will be signed by the Mooring Master on behalf of the Company. The time for giving the Notice of Readiness is the time of the vessel's arrival at the usual anchorage, or the time of boarding of the Mooring Master, whichever is the earlier. Notice of Readiness will not be accepted unless the vessel is ready to load.

Loading rates will vary according to conditions but can be expected to be up to 30,000 bbls per hour at the Spread Mooring and up to 65,000 bbls. per hour at the SPM.

Information as to the anticipated loading rate should be obtained from the Mooring Master who will also advise the expected specific gravity and loading temperature.

The maximum possible notice in regard to slowing the loading rate for "topping off", etc. should be given to the Mooring Master.

Pressure Surges: Because of the long lengths and large diameters of the pipe-lines, ships' loading valves must not be closed against the flow of oil. Vessels provided with mechanically or hydraulically operated valves whose closing time is less than thirty seconds must advise the Mooring Master accordingly. In such circumstances the loading rate may have to be reduced.

BALLAST: There are no facilities for the shore reception of ship's ballast. Vessels are accepted for loading on the express understanding that only clean ballast will be discharged into the sea.

Masters are required to sign oil pollution advice form letters on arrival. If a vessel is observed to be discharging dirty ballast, then it may be liable to prosecution or penalty and all further discharge will cease. The discharge of oil from bilges or other spaces is similarly strictly prohibited.

A vessel must have sufficient ballast for safe manoeuvring into the berth.

FRESH WATER: Not available.

FUEL: Not available.
STORES: Not available.
MEDICAL: Only emergency medical facilities.
TIME: Nigerian local time is GMT plus 1 hour throughout the year.
CUSTOMS ALLOWANCES: 200 cigarettes per man. Beer, no limit. 1 bottle of spirits, officers only.
REPATRIATION: Crew changes not possible.
GENERAL: *Agency:* The Company will handle documentation requirements for vessels loading at the Terminal. It does not carry out general vessel agency functions.

Early Departure Procedure: The Early Departure Procedure will be used at the Que Iboe Terminal.

Courtesy Ensign: All vessels must exhibit the Nigerian National Ensign from the foremast or as appropriate while in the vicinity of the moorings.

"B" Flag: During loading, the International Code Flag "B" must be displayed from a topmast signal halyard during daylight hours. During hours of darkness a red all around light must be displayed where it can best be seen.

Communications at the Berth: The primary system of communication with the Terminal while in berth shall be through the Mooring Master by means of portable VHF units provided by the Company.

Safety Precautions:

(a) The ship's engines must remain ready with full power for immediate use. No repairs of any sort will be permitted in the moorings.

(b) Fire Fighting equipment shall be in instant readiness throughout the vessel and additional extinguishers available at the loading manifold. Fire hoses must be connected at all fire stations and ready for immediate use.

(c) Not less than one deck officer and three seamen shall be available on deck at all times while vessel is in moorings.

(d) Power must be available at all times on all deck winches and on anchor windlass while vessel is in moorings. Vessels moored to SPM will be required to go astern when using turning gear.

(e) All deck scuppers must be plugged tight before connecting the submarine and deck hoses, and remain plugged until all hoses are disconnected.

(f) Adequate deck lighting must be available for night mooring and loadings. A good floodlight will be required to illuminate the area around the submarine and cargo hose connections during cargo loading operatings. During the discharge of ballast and loading of cargo at night, the sea area around the vessel must be adequately lighted.

(g) No transistor radio sets or other electrical appliances may be used on deck unless certified for use in hazardous petroleum areas.

(h) Smoking will not be permitted on deck whilst in the moorings and will only be permitted in places approved by the Mooring Master. All alleyway doors to passageways, leading to deck areas are to be kept closed during cargo transfer operations.

(i) The I. O. T. T. S. G. Check List will be used jointly by vessel's staff and Mooring Master in order to arrive at a mutually agreed safety standard.

AUTHORITY: Mobil Producing Nigeria, Lagos.

SAPELE (incl. Koko): 05.55 N. 05.42 E.

PORT LIMITS: Escravos Fairway Buoy.
DOCUMENTS:

Crew List.
Port of Call List.
Passenger List.
List of Arms and Ammunition.

These documents required by Following Government Departments: Collector of Customs, Customs Preventive Service, Ports Health Authority, Police Authority/Immigration, Nigerian Produce Marketing Co., Nigerian Ports Authority NPA also require Inward and Outward Masters' Declarations Manifests, Bill of Lading, etc.
PILOTAGE: Not compulsory, but local river guides available at Escravos on request.
ANCHORAGES: No laid-down areas.
RESTRICTIONS: None under normal conditions.
MAX. SIZE: Max. permissible length 239.57 m., draft 16.5 ft. plus tide for the day, minus Master's underkeel clearance.
HEALTH: Normal International Regulations, but between ports in Nigeria nothing required.
RADIO: ETA and ETD best passed via Lagos Radio to Lagos Agents, who in turn advise local Agents. Port Authority operate VHF Channels 16, 14, 13, 12, 11 and 9.
TUGS: None available.
BERTHING: Mooring/unmooring normally done in daylight hours.
Sapele:

Berths	*Type*	*Berth Length (m)*	*Depth (m)*
1	Anchorage/Stern to Buoy	164.592	7.315
2	Anchorage/Stern to Buoy	168.250	7.620
3	Anchorage/Stern to Buoy	239.573	6.706
4	Anchorage/Stern to Buoy	177.699	6.706
5	Anchorage/Stern to Buoy	175.565	7.315
6	Anchorage/Stern to Buoy	208.483	7.620
7	Anchorage/Stern to Buoy	151.790	7.620
8	Anchorage/Stern to Buoy	117.043	7.925
9	Anchorage/Stern to Buoy	151.790	6.706
10	Anchorage/Stern to Buoy	96.926	7.925
11	Anchorage/Stern to Buoy	Old/not used	—
12	Anchorage/Stern to Buoy	—	5.486
13	Anchorage/Stern to Buoy	160.934	6.706
14	Anchorage/Stern to Buoy	208.483	6.706
15	Anchorage/Stern to Buoy	160.934	6.706
16	Anchorage/Stern to Buoy	224.942	6.096
17	Anchorage/Stern to Buoy	202.997	7.010
18	Anchorage/Stern to Buoy		5.791
A.T. & P.	Wharf I	122	4.88
A.T. & P.	Wharf II	122	4.67

Koko: One wharf length 137.16 m., depth 7.315 m. Also see "Shipmaster's Report".
STEVEDORES: Handled by Shipping Agents.
MEDICAL: Local general hospital.
TANKERS: Only small coastal tankers.
DENSITY: River water almost fresh at all states of tide.
FRESH WATER: None available.
FUEL: None.
GANGWAY/DECK WATCHMEN: Supplied by Shipping Agents.
OPENING/CLOSING HATCHES: Either by crew or stevedores.
CUSTOMS ALLOWANCE: (Tobacco/wine allowance): 200 cigarettes per person per week. 1 bottle per officer per week.
CARGO GEAR: No extra requirements.
IDENTIFICATION CARDS: Seamen's identity card.
CONSULS: None.
REPAIRS: No facilities.
DRY DOCKS: None.
REPATRIATION: By road to Lagos/Benin and international airways.
AIRPORT: Benin 52 km., internal only.
TIME: GMT plus 1 hour.
HOLIDAYS: Port closed only Christmas Day, Good Friday and Republic Day.
POLICE/FIRE: Police Sapele 19. No fire service.
TELEPHONES: No facilities exist for placing on board.
SERVICES: None.
SHORE LEAVE: Allowed.
DEVELOPMENTS: There is a proposal for a development of a new Port with 6 berths (Wharf) of 250 m. There will be increase in draft after the completion of the Port.
SHIPMASTERS REPORT: 1977 (Koko).
Documents: Livestock list also required.
Pilotage: Request Creek Pilots through Escravos Pilot on VHF Channel 16. The Pilots are local fishermen and race each other to the vessel to offer their services. They will not proceed beyond the breakwater. Special care must be taken when entering, as many of the buoys are out of position.

A strong NW'ly current runs by the breakwater, also there is a heavy swell which makes steering difficult.

Draft varies but seems to be not less than 18 ft. at LW, to 24 ft. HW. In Escravos not only a Pilot boards the ship but a helmsman too. The latter is quite useful especially in the narrow part of Nanacreek.

Koko has a VHF station Channel 16 for port operations.

Cargo shed capacity is insufficient, so more often than not this shed is full and cargo is discharged into "direct delivery". But because of the bad infrastructure of this port and the frequent lack of lorries, this discharge is a slow operation (sometimes less than 100 tons per day).

Ships waiting for berthing at Koko can anchor downstream or upstream of the berth. The anchorage is good and the "creekpilots" stay on board, i.e. they stay till the ships return to Escravos, where they boarded.
Repatriation: By road to Warri and there by small plane to Pt. Harcourt or Lagos.
AUTHORITY: Nigerian Ports Authority.
AGENT: Alraine (Nigeria) Ltd. Private Mail Bag 4030, Sapele Tel. 177. Telex: Lagos 21244.
N.B. Correspondence should be addressed to Warri office, see "Burutu".

Norway

AGOTNES: 60.25 N. 05.01 E. (See Plan Book)

DOCUMENTS:
1 General Declaration.
2 Cargo Declarations.
1 Stores List.
1 Health Declaration.
1 Personnel Effects.
2 Manifests.

PILOTAGE: Usual entrances to port at Korsfjord and Fedje.

Provisions for Advance Reports in connection with the ordering of Pilots. Issued by the Director of Pilotage.

1. Vessels approaching from the sea and desiring a Pilot should order the Pilot at 24 hours notice insofar as possible and confirm arrival at pilot station at 2 hours notice.

The advance order can be sent in the following manner:

a. From ships at sea over radio direct to the sea pilot watch (calling frequency 2182 kc/s from 2 minutes past until 10 minutes past each full hour, or over VHF-radio-telephone, calling frequency 156.80 mc/s, Channel 16).

b. From ships at sea over coastal radiostation to pilot station or pilot office.

c. From broker or shipowner over telephone to sea pilot station or to any pilot office which will immediately convey the report to the sea pilot station.

2. Vessels lying in port and desiring Pilot will order the Pilot from the nearest pilot office during its office hours and if possible at 4 hours notice.

3. Vessels approaching from the sea as well as vessels lying in port shall, when making an advance order state the name and destination of the vessel and whether or 2 Pilots are desired.

4. The Pilots will on the whole be despatched to the ships in accordance with the advance orders, and vessels are therefore requested to comply with the foregoing rules as far as possible in order to avoid having to wait for Pilot.

5. The international provisions for summoning Pilots by signal flags or blue lights, etc., are still in force, but should in future be used as a supplement to the radio communications or as the sole communication in emergencies.

ANCHORAGE: About 1,600 ft. North of CCB quay, depths from 29 to 74 m.
MAX. SIZE: Water depths up to 60 ft. at quayside.
HEALTH: No Certificates required. In event of any disease or fever, contact Agents.
RADIO: All messages to Agents via Bergen or Rogaland Radio.
VHF: Bergen Radio on Channel 16 or direct on Channel 10.
TUGS: Available upon request. Vessel's lines usually used. No extra charge for tug's line.
BERTHING:
West side, quay of 100 m. long. Depth of water 60 ft.
East side, quay of 105 m. long, Depth of 14 m.
North West side, quay of 120 m. long. Depth of 7.2 m.
CRANES: 1 Mobile crane 280 tons lifting capacity. 1 Mobile crane 50 tons lifting capacity. 1 Mobile crane 40 tons lifting capacity. 2 Mobile cranes 25 tons lifting capacity. Also 45 tons floating crane available upon request.
BULK CARGO FACILITIES: For drilling mud and cement only.
SPECIALISED CARGO HANDLING FACILITIES: Loading/unloading carried out by Mobile cranes and trucks.
BRIDGES: Bridge between Knarrevik and Drotningsvik. Height at mean level 50 m.
STEVEDORES: Provided by Coast Centre Base.
MEDICAL: 4 hospitals available (Bergen).
DENSITY: About 1024.
FRESH WATER: Can be supplied alongside the quay.
FUEL: Gasoil No. 0401 can be supplied alongside the quay.
CONSULS: (in Bergen). Belgian, Brazilian, British, Danish, Finnish, French, Greek, Islandic, Dutch, Panama, Peruvian, Portuguese, Spanish, Swiss, Swedish, Turkish, German, Uruguay, Austrian.
REPAIRS: All repairs possible.
DRY DOCKS: Available in Bergen. 3 Dry docks 365 ft. long with 12.5 – 21 ft. depth on blocks.

1 floating dock for vessels up to 10,000 g.r.t. and 2 smaller floating docks. Largest vessel 51,839 g.r.t.

Draft 34 ft. 4 in. Drafts up to 35 ft. can be accommodated.

SURVEYORS: Lloyds, A.B.S. and Norske Veritas.
GANGWAY/DECK WATCHMAN: Not necessary.
OPENING/CLOSING HATCHES: Normally carried out by crew.
CUSTOMS ALLOWANCE: 0.75 litres of spirit and 200 cigarettes for each member of the crew.
REPATRIATION: All facilities available for crew changes.
AIRPORT: 35 km. from Bergen Airport served by regular airlines.
TIME: GMT plus 1 hour.
HOLIDAYS: New Years Day (January 1st); Maundy Thursday; Good Friday; Easter Monday; May 1st; May 17th; Ascension Day; Whit Monday.
POLICE/AMBULANCE/FIRE: Bergen 002; Bergen 003; Bergen 001 respectively.
TELEPHONES: No arrangements for connection on board ships. Telephone box on quayside.
SERVICES: Compass adjuster, Radio/Radar service. Also calibration of the Direction Finder, Ships laundries.
SHORE LEAVE: After clearing inwards, crew members are allowed to go ashore without special permission.
AGENTS: A.S. Coast Center Base Ltd. & Co. 5363 Agotnes. Tel: (05) 21 66 80. Telex: 42 835 ccb n. Cable: Ceeceebee.

ALESUND: 62.27 N. 06.09 E. (See Plan Book)

DOCUMENTS:
1 Crew List.
1 Passenger List.
1 Customs Documents.
1 Health Documents.
3 Manifests.
3 Bills of Lading.
1 Ship's Papers.
1 Stores Lists (provisions).

PILOTAGE: From open sea, Pilot is taken on board at Rundo pilot station. Watch 24 hours a day. To be called 3-4 hours before ETA by VHF 16, or radio.
ANCHORAGE: On the North side of the town in Valderhaugfjorden in depths of 20 m. to 60 m.; bottom, sand and mud.

On the South side of the town in Aspovagen in depths of 20 m, to 40 m., bottom mud.

RADIO: Alesund Radio 2182. VHF 16. Harbour Office is manned 24 hours. Tel.21425.
TUGS: Meet vessel normally before entering the harbour, or by order.
BERTHING: At the Southern Harbour there are the following commercial quays:

Storneskaia: East side, length 85 m., depth 13 m. to 7 m. On this side Ro/Ro berth available. South side, length 150 m., depth 13 m, Warehouse cap. 1,600 sq. m.

Prestekaia: South side, length 220 m., depth 13 m. West side, length 43 m., depth 5 m. min. Warehouse cap. 4,100 sq. m.

Skutevika: Special quay for fishing vessels, length 300 m., depth 6 m. Only mooring on N.E. side. Quay, length 40 m., depth 7 m.

Sjogata: Mooring quay, length 200 m., depth 9 m. At Northern Harbour there is one commercial quay.

Skansekaia: North side, length 190 m., depth 13 m. South side, length 150 m., depth 5 m. This quay forms protection for a small inner harbour with several smaller quays.

STEVEDORES: Obtained by Agent who requires ETA 12 hours before ships arrival.
CRANES: Mobile crane to lift 18 tons available. Floating to lift max. 100 tons available.
CONTAINERS: Depot for *C.T.I.* containers.
FRESH WATER: Available.
FUEL: Bunkering facilities from all major oil companies. Loading by barge or pipeline at berth.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: This work is normally carried out by crew.
CUSTOMS ALLOWANCE: Tobacco: 200 cigarettes. Wine/Spirit: 1 bottle of spirits.
IDENTIFICATION CARDS: Not required.
REPAIRS: Available. Floating dock 380 ft. by 50 ft. to lift 3,000 tons. Three patent slips for vessels up to 700 tons.
AIRPORT: Alesund airport, Vigra. Passenger flights (three times a day) to and from Oslo, Trondheim, Bergen.
TIME: GMT plus 1 hour.
HOLIDAYS: 1st May; 17th May.
POLICE/AMBULANCE/FIRE: Police 21321; Ambulance 23348; Fire 014.
TELEPHONES: No arrangements for placing telephones on board.
AUTHORITY: Alesund Havnevesen.

ALVIK: 60.26 N. 06.24 E.

Alvik located in inner part of Hardangerfiord. Ferrosilisium works. Vessels from abroad may call Haugesund for inward Customs' clearance.
DOCUMENTS: See "Bergen".
PILOTAGE: Compulsory. Belonging to Bergen Customs' district.
BERTHING: Quay No.1, length 80 m. 2 cranes, 7.5 and 9.5 tons. Quay No. 2, length 90 m. 1 crane 7.5 tons.
AUTHORITY: See "Bergen".

ARDALSTANGEN: 61.14 N. 07.42 E.

Ardalstangen: Aluminium works. Located in innermost part of Sognefiord. 61° 14′ 03″ N. 7° 42′ 28″ E.
DOCUMENTS: See "Bergen".
PILOTAGE: Compulsory. Belonging to Bergen Customs' district and unless otherwise arranged beforehand vessels from abroad must call at Bergen for inward clearance.
BERTHING: 1 quay 600 ft., 29 ft. depth alongside; 1 quay 210 ft., 18 ft. depth alongside.

Cranes up to 50 tons capacity. Ice free.

TRAFFIC: About 500 ships loading and discharging.
AUTHORITY: See "Bergen".

ARENDAL: 58.28 N. 08.46 E. (See Plan Book)

DOCUMENTS: See "Bergen".
PILOTAGE: The Pilot boat *Arendal* is stationed at Arendal. Contact may be made on VHF/RT or telephone 21347–23668 or out of office hours via Kristiandsand or Tjome Radio.
ANCHORAGE: Safe anchorage ground is readily available and there are numerous mooring places for vessels not docking alongside the quays.
MAX. SIZE:

	Depth Feet	Length Metres
Nye Tollbodkaien	33	230
Batterikaien	33	110
Hotellbryggen	30	77
Malmkaien	28	30
Stenkaien	26	110
Utstikkerkaien Barbu	24	58
Fryselagerkaien	22	76
Jaktekaien	20	50
Gamle Tollbodkaien	20	45
Kallevigs Brygge	20	43
Langbryggen	15	120
Ferjekaien	26	30

No tide even in exceptional weather conditions, increase in water level never exceeds 3 ft.
TUGS: Two small tugs. 500 h.p. and 300 h.p.
RADAR/VHF: Radar at Pilot station. VHF see "Pilotage".
CRANES: 2×3 ton electric cranes on rails at Nye Tollbodkaien. At Vindholmen, 1 crane 100 tons capacity and 1 crane 60 tons capacity.
MEDICAL: Advance notice required for medical attention.
FRESH WATER: Available all quays.
FUEL: Advance notice required.
GANGWAY/DECK WATCHMEN: Recommended.
OPENING/CLOSING HATCHES: Crew or stevedores.
CERTIFICATES: Normal International Certificates required.
CUSTOMS ALLOWANCE: 200 cigarettes, 1 bottle spirits.
IDENTIFICATION CARDS: Not required.
CONSULS: Sweden, Denmark, Finland.
REPAIRS: Port has well-equipped workshop to carry out engine repairs as well as hull work above water line.
AIRPORT: Kjevik 60 km.
TIME: GMT plus 1 hour.
POLICE/AMBULANCE/FIRE: Police 22030; Fire Station 22255.
TELEPHONES: Can be placed aboard.
AUTHORITY: Harbour Master.

BERGEN: 60.24 N. 05.19 E. (See Plan Book)

DOCUMENTS:
1 Provision List.
1 List of Bonded Stores.
1 Health Declaration.
2 Manifests.
2 Crew Lists.
2 Passenger Lists.
Certificate of Tonnage.
Dangerous Cargo List.

PILOTAGE: Compulsory. Main entrance to port at Marsteinen Lighthouse (pilot station) 60° 24′ N. 5° 18′ 50″ E. 24 nautical miles from town, but vessels from South may enter at Skudesnes (88 nautical miles) and from North at Fedje pilot station (32 nautical miles). VHF Channel 16. Practically no tide. Port free of ice throughout whole Winter and well sheltered from all winds. Sound signals for Pilot, 3 long and 1 short. Harbour pilotage not compulsory but advisable.
ANCHORAGE: Puddefiord. Good holding grounds. Depth 10 to 50 fathoms of water.
RESTRICTIONS: Vessels can enter day and night.
MAX. SIZE: Max. draft 35 ft. Vessels up to 50,000 tons have been berthed at Dokkeskyaersquay. Oil installation up to 30,000 d.w.t.
HEALTH: See "Documents". If vessel carries quarantine flag on contagious diseases, radio communication should be sent to Agents for instructions, otherwise no special regulation.
RADIO: Communication to Agent should be sent through Rogaland Radio or Bergen Radio.
VHF: VHF radio for port operations. Call sign "Bergen Port Radio".
TUGS: 2 tugs, each 1,000 h.p. available. Ship's lines to be used, contractors Bergen Steamship Co. Tugs normally join vessel at Puddefiord or subject to requirements.
BERTHING: Berthing instructions from Harbour authorities through Agent's office.
CONTAINER FACILITIES: Container terminal at Dokkeskjaerskai area. The quay is 90 m. long with a depth of 9 m. at MW. It is intended for bow/stern loaders and is equipped with a ro/ro bridge with an axle load of 60 tons and 13,000 sq.m. area for storage and container handling.
BRIDGES: A bridge between Knarrevik and Drotningvik is completed. Height of bridge from the water will be 50 m. at mean water level. Bridge position will be 5 miles from harbour in the entrance to port from South.
STEVEDORES: Stevedoring arranged by Agents subject to requirements. 24 hours notice, important obtain in good time accurate ETA. Ordinary working hours at port 0730-1530 hrs. Saturdays until 1300 hrs.
CRANES: 15 shore cranes, lifting capacity 6 tons.
MEDICAL: Masters to advise by radio prior arrival if medical attendance required on board. Hospital facilities available.
TANKERS: Discharge lines usually 6 and 8 in. No slop (residues) discharge facilities. Number of tanker berths 5: Shell, Esso, Fina, Mobil Oil, and BP. Max. drafts 30 ft.
DENSITY: Salt water.
FRESH WATER: From all quays and wharves with exception of some oil berths where water barge necessary.
FUEL: All grades of diesel, fuel and gas oil including lubricating oil available at all wharves in main entrance. Supplies also from barge subject reasonable notice.
FIRE PRECAUTIONS: No special precautions. Special harbour fire-fighting boat. As usual no smoking permitted during discharge operation.
GANGWAY/DECK WATCHMEN: Obtainable subject inquiry for 12 hours watch from 1900 to 0700 hrs.
OPENING/CLOSING HATCHES: Crew allowed to open and close hatches.
SHIP'S CERTIFICATES: All certificates to be on board. Ship's tonnage certificate to be produced to Custom authorities upon arrival.
CUSTOMS ALLOWANCE: Tobacco, 20 cigarettes per day or 20 gramme tobacco per crew member. Wine and/or Spirit, 1 bottle spirit or wine for consumption on board allowed per crew member.
IDENTIFICATION CARDS: Not required.
CONSULS:

Belgian	233 873	Panama	200 011
British	210 990	Peruvian	218 028
Danish	215 000	Portuguese	218 140
Finnish	230 700	Spanish	214 192
French	230 050	Swiss	215 115
Guatemala	214 493	Swedish	219 760
Greek	215 090	Turkey	210 105
Icelandic	219 680	German	219 984
Italian	218 135	Uruguay	213 307
Dutch	256 000	Austrian	210 173

REPAIRS: All repairs possible.
DRY DOCKS: Major: Bergens Mekaniske Verksteder. Minor: Mjellem & Karlsen Verksted A/S, Bergen. 6 patent slips and 1 dry dock, 365 ft. long. Floating dock for vessels up to 20,000 tons d.w.
REPATRIATION: All facilities available.
AIRPORT: Flesland Airport, 12 miles outside Bergen. Bus service from town, daily connections with Earope and U.S.A.
TIME: GMT plus 1 hour.
HOLIDAYS: General holidays: New Year's Day (January 1); Maundy Thursday; Good Friday; Easter Monday; Labour Day (May 1); Ascension Day; National Holiday (Sunday in May); Christmas Eve (December 24); Christmas Day (December 25); Boxing Day (December 26); New Year's Eve (December 31).
POLICE/AMBULANCE/FIRE: Police 002; Ambulance 003 or 210 185; Fire 001.
TELEPHONES: Telephones may be installed on board during ship's stay at Dokkeskjaesquay or Skoltegrunnsquay if required.
SERVICES: Compass adjusting, laundry, ship chandlers for delivery of provisions and bonded stores. Radar servicing for following types: Decca, Nera, RCA, AEI, Raytheon, Kelvin Hughes, Therma Sperry. Service arranged through port agent.
SHORE LEAVE: No restrictions.
DELAYS: Under normal conditions, no special delay should be expected.
AUTHORITY: Bergen Havnevesen.

BODO: 67.17 N. 14.24 E.

DOCUMENTS:
2 Store Lists.
2 Crew Lists.
2 Lists Crew's Personal Effects.

PILOTAGE: Sea Pilot North of Fleinvaer Island position 67° 12′, N. 13° 48′ E. White Pilot boat with VHF Channel 16. Harbour Pilot outside breakwater head – 24 hours notice.
ANCHORAGE: Outside breakwater. According instructions from Sea or Harbour Pilot. No draft limitation.
RESTRICTIONS: None – weather permitting.
MAX. SIZE: Max. 18,000 d.w.t. for oil carriers with max. draft 32 ft. Otherwise max. draft 22 ft. along quays for coal, salt and warehouse goods.
RADIO: Bodo Radio/LGP. VHF Harbour office and Bodo Radio.
TUGS: Not available.
BERTHING: Usually on arrival – otherwise harbour Pilot will bring instructions from Agent or Port Authorities.
STEVEDORES: Ordered by Agents – working day and night.
MEDICAL: 24 hours notice of medical attention required. Hospital facilities available.
TANKERS: Shore lines, 6, 8 and 12 in., 2 berths, slop facilities not available, max. draft 32 ft. Fresh water available.
DENSITY: 1025.
FRESH WATER: Available all quays.
FUEL: All kinds bunkers and oil without notice from two installations.
GANGWAY/DECK WATCHMEN: Available, but not compulsory.
OPENING/CLOSING HATCHES: Normally by crew.
CERTIFICATES: Ship's Register Certificates.

CUSTOMS ALLOWANCES: 200 cigarettes or 150 gr. tobacco and half bottle of spirit.
CARGO GEAR: No additional requirements. Ship's gear to be used except for discharging coal, coke and salt where special cranes used.
IDENTIFICATION CARDS: Not required.
CONSULS:

Sweden	20115	Finland	20010
France	21000	Germany	20089
Denmark	21070		

REPAIRS: Minor deck and engine repairs possible.
DRY DOCKS: None.
REPATRIATION: Good facilities.
AIRPORT: 2 km. distant. Regular airlines.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: 1st May and 17th May (national holiday) Cargo work may be arranged.
POLICE/AMBULANCE/FIRE: Police 20020; Ambulance 22360; Fire 22622.
TELEPHONES: No arrangements for placing telephones on board.
GENERAL: Imports oil, coal, coke and salt. Exports fish, herring meal, herring oil.
SERVICES: Compass adjusting, all kinds of nautical instruments. Ships' chandler.
SHORE LEAVE: No restrictions.
AUTHORITY: Bodo Havnevesen.

BREVIK: 59.03 N. 09.43 E. (See Plan Book)

PORT LIMITS: Port limits begin in Langesundfjorden, 2 nautical miles S.E. of Brevik.
DOCUMENTS:
Crew List.
Tobacco and Spirit List.
Cargo and Stores List.
3 copies of Manifest.
Declaration of Health List.
PILOTAGE: Langesund Pilot Station – call sign LHXP. 24 hours prior notice and 2 hours before arrival. VHF Channel 16 – radio telephone 2182. Pilot boat located 1 mile S.E. of Langoytangen Lighthouse (pos. 58° 59′ 30″ N., 9° 45′ 30″ E.).
ANCHORAGE: At Helgerofjorden, 2 miles East of Langoytangen Lighthouse. Depths 15–25 fathoms.
RESTRICTIONS: No entry restrictions, except in bad visibility.
MAX. SIZE: Tankers: LOA 600 ft. Beam 85 ft. Max. Draft 32 ft. Others: LOA 600 ft. Beam 85 ft. Max. draft 34 ft.
HEALTH: Pratique obtained when alongside wharf; arranged by customs.
RADIO: Rogaland Radio, call sign LGQ.
TUGS: Tugs not normally used in Brevik. 1 tug, 1200 h.p. and 1 tug 3000 h.p. used for tankers.
STEVEDORES: 24 hours prior notice required for ordering gangs.
BULK HANDLING: 1 berth handling bulk cargo, situated at Norcem, half a mile North of Brevik. Cargo: Cement and cement-clinker. Length of berth: 200 m. Depth alongside 36 ft.
No other berths handling bulk cargoes.
MEDICAL: No advance notice required for medical attention.
TANKERS: Discharging hoses 8 in. diameter. No slop discharge facilities. 2 tanker berths draft 32 ft.
DENSITY: Brackish water, density from 1012 to 1023.
FRESH WATER: Hoses from shore, capacity 10 t.p.h.
FUEL: All grades available.
GANGWAY/DECK WATCHMEN: Watchmen available but not compulsory.
OPENING/CLOSING HATCHES: Normally carried out by crew members.
CERTIFICATES: Ship's Register, and Derat. Certificate required.
CUSTOMS ALLOWANCES: 200 cigarettes per man. 1 bottle of spirit per man.
IDENTIFICATION CARDS: Not needed.
REPAIRS: All types of repairs possible (deck and engine).
REPATRIATION: Can be arranged.
AIRPORT: Fornebu – Oslo airport – 100 miles, served by regular airlines.
TIME: GMT plus 1 hour. No alterations during the year.
HOLIDAYS: New Year's Day; Day before Good Friday; Good Friday; Easter Monday; May 1st; Ascension Day; May 17th; 25th and 26th December. No work done on these days.
POLICE/AMBULANCE/FIRE: Police 51040; Ambulance 70111; Fire 71171.
TELEPHONES: Can be placed on board at no extra cost.
SHORE LEAVE: Crew members allowed ashore.
AGENT: Stiansen & Wiborg A/S, P.O. Box 85, 3951 Brevik. Tel. (035) 70040 and 70833. Telex 16338 AB–STIWI N. After hours Tel: (035) 70835 and (035) 70833. Cables: "STIANSEN", "WIBORG"

BRONNOYSUND: 65.30 N. 12.13 E.

DOCUMENTS: See "Bergen".
PILOTAGE: Pilot ordered through Harbour Office tel. 78. Cable address "Losforman".
ANCHORAGE: Prestoytaren. 65° 29.0′ N. 12° 11.5′ E. Depth 28 ft. to 180 ft.
MAX. SIZE: Largest ship approximately 5,000 g.r.t. Depth at Port Authorities quay 18 ft. to 24 ft. LWOST.
At tanker installations:

A/S Norwegian Esso	16 ft. LWOST
A/S Norske Shell Central fishing port	15 ft. LWOST
A/S Braendselolje, Salhus	16 ft. LWOST
A/S Algea Produkter	14 ft. LWOST
Central fishing port	15 ft. LWOST

RADIO: Rorvik radio station call signal: "LGY". Hours of attendance 0800 to 2100 hrs.
TUGS: None.
BRIDGES: Bronnoysund Bridge, max. clearance – 30 m. spring high tide.
VHF: Bronnoysund Port Radio. Channel 16 – 156.800 mHz; Channel 12 – 156.600 mHz primary work; Channel 14 – 156.700 mHz secondary work; Channel 13 – 156.650 mHz pilotage work.
STEVEDORES: Bronnoysund Discharge and Loading Society tel. 301.
MEDICAL: Nearest hospital Sandnessjoen 67 km.
FRESH WATER: Delivered by hose to all Port Authority Berths.
FUEL: Delivered to all berths, 24 hour service.
GANGWAY/DECK WATCHMEN: Watchmen at gangways and pilot ladders optional. Can be ordered through Bronnoysund Discharge and Loading Society.
OPENING/CLOSING HATCHES: Usually by port workers.
CUSTOMS ALLOWANCES: Master 400 cigarettes or 40 grams tobacco; all other crew 200 cigarettes or 20 grams tobacco. Wine/spirits; Master 2 litres; all other crew 0.75 litre.
IDENTIFICATION CARDS: Crew to possess identification card with passport photo.
CONSULS: None.
REPAIRS: Limited deck and engine repairs. Turner's shop and welder's shop available.
AIRPORT: Regular traffic North and South daily.
TIME: GMT plus 1.
HOLIDAYS: During Sunday and holidays not permitted discharge/load between 1000 to 1300 hrs., but dispensation can be obtained.
POLICE/AMBULANCE/FIRE: Police 45 and 450; Ambulance 28; Fire 19 and 106.
AUTHORITY: Harbour Master.

DRAMMEN: 59.45 N. 10.13 E. (See Plan Book)

DOCUMENTS:
Bill of Health.
2 Crew Lists.
2 Passenger Lists.
2 Customs Lists for crew members and passengers.
Bills of Lading.
3 Manifests for every port of discharge.
PILOTAGE: Give 6 hours notice by R/T 2182 kc/s or VHF Channel 16 to "Faerder Pilot". Coast stations "Tjome Radio" LGT or "Farsund Radio" LGZ can also be used. Harbour Pilots ordered through ship's Agents. Harbour pilotage is not compulsory.
ANCHORAGES: Pilot service supplies information regarding anchorages.
RESTRICTIONS: Svelvikstrommen Channel, depth 10 m. equipped with beacons and radar reflectors for safe navigation.
During ice-breaker season, which may last from end-December, to middle-March, ice breaker is in radio contact with port and with ships needing assistance.
MAX. SIZE: Max. draft for main harbour 30 ft., otherwise no restrictions.
HEALTH: International procedure followed to obtain pratique. In case of suspected diseases or fever inform Port Authorities, tel. 81 88 90. When arriving from a Norwegian port pratique automatic.
RADIO: Tjome Radio, call sign "LGT" Farsund Radio, call sign "LGZ". Oslo Radio, call sign "LGO". R/T 2182 kc/s. or VHF Channel 16 can also be used.
Port Authority maintains VHF radio-telephone watch 24 hours. Call sign "Drammenhavne Radio". Not on holidays.
TUGS: Under normal conditions not necessary except for large vessels, but available on request. Normally ship's hawsers or lines used for towing. Tugs ordered through Agent.
RADAR/VHF: VHF Channel 16, 12 and 11 when communicating with Drammen Port Authorities. No port radar service.
TANKERS:
Tronstad Berth
Wooden quay 92 m. long, max. draft 32.81 ft. (10 m.). Fresh water available.
Pipeline connections: Gas oil 8 in.; light fuel oils 9 in.; asphalt 8 in.
Holmen South Berth
Concrete quay, max. draft 29.53 ft. (9 m.). Fresh water available.
Pipeline connections: Gas oil 8 in.; light fuel oils 8 in.; paraffin 6 in. heavy fuel oil 4 in.
B.P. Berth, Solumstrand
9 m. wide quay at end of pier, max. draft 16.4 ft. (5 m.).
Pipeline connections: Light gas oil 6 in.; petroleum 4 in.; white spirit 3 in.; propane 2 in.
Bakketomta Berth, Lierstranda
Concrete quay, 23 m. long, max. draft 16 ft. (4.88.m.).
Pipeline connections: Super petroleum 8 in.; petroleum 8 in. light fuel oil 8 in.; gas oil-paraffin 6 in.; white spirit 4 in.

Esso Berth, Solumstrand

Concrete quay, 23 m. long, max. draft 16 ft. (4.88 m.).

Pipeline connections: Light fuel oil 6 in. and 4 in.; gas oil 6 in.; petroleum 6 in. and 4 in.

BERTHING: *Main Harbour*

Quays	*Depth Alongside (ft.)*	*Length (ft.)*	*Use*
Tollbukaia	21	328	Coastal/local traffic.
Krankaia	21	660	General cargo/paper
Myrakaia	22	478	Coal. Pyrites. Gen. Cargo
Langbrygga	23	837	Paper. General Cargo
Tjomekaia	23	526	Paper
Holmen South	30	1,330	Gen. Cargo. Air conditioned
Roll-on/Roll-off Holmen South	25	*	Cars, Trailers, Containers
Holmen East	24	330	Paper
Roll-on/Roll-off Holmen East	20	200	Cars, Trailers, Containers.
Risgarden	30	500	Cars Trailers Containers
Roll-on/Roll-off	30	†	
Tronstadkaia	30	†	For Tankers
Roll-on/Roll-off Tronstadkaia	30	‡	Fork-lifts Unit Load

*Special arrangement for stern and bow ramps
†Size of vessels decided by max. draft 30 ft.
‡Special arrangements for ramps (small ships)

Container and Ro-Ro Facilities: Three and Ro-Ro quays for containers, vehicles and trailers.

Fruit Storage 21,600 sq. ft. Airconditioned fruit-storage.

Also see "Tankers".

STEVEDORES: Labour must be ordered latest 1530 hours day before arrival. Saturdays before 1230 hrs. Working hours: Monday to Friday from 0700 to 1600 hrs. with breaks from 0900 to 0930 hrs. and 1300 to 1330 hrs.

Saturday from 0700 to 1300 hrs. with break from 0900 to 0930 hrs.

Overtime can be arranged through Agent.

MEDICAL: In case of emergency, notice regarding required medical treatment must be given as soon as possible. First class hospital facilities available. No special inoculation or fever certificates necessary, except those according to international health regulations.

DEPTHS: Chart depths vary only slightly owing tidal fluctuations. Exceptional conditions, such as snow melting in Spring, heavy rainfall and prevailing strong Southerly or Northerly winds will cause stronger currents and a variation in water levels.

FRESH WATER: Delivery by hose available anywhere at any time.

FUEL: Tronstad berth: gas oil 200 sec. Holmen S.: fuel 2000 sec., marine diesel 200 sec. Bakketomta Lierstrand: Bunkering by tanklorry possible if necessary. Esso Solumstrand: gas oil visc. 1,2 at 20 degrees cel.; diesel visc. 1,7 at 20 degrees cel. Lubricating greases and oils available.

FIRE PRECAUTIONS: International danger signals and precautions practised. Wires for towing must be ready for immediate use. In case of fire on board or in vicinity, vessel must leave quay and harbour as soon as possible.

GANGWAY/DECK WATCHMEN: Watchmen recommended, through Agent.

OPENING/CLOSING HATCHES: If necessary hatches can be opened or closed by stevedores, but usually by crew.

CERTIFICATES: Usual ship's certificates according to international regulations.

CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes/100 grams of tobacco allowed weekly. Wine or Spirits, 1 bottle wine or spirits usual weekly allowance.

CARGO GEAR: International Safety Regulations followed.

CRANES: 12 electric cranes 3-10 tons, 2 mobile cranes 10-50 tons, 2 electric cranes for discharging of coal, capacity 500 t.p.d. each.

IDENTIFICATION CARDS: Not required.

CONSULS:

Belgium	tel. 831485	Germany	tel. 819780
Denmark	,, 833650	Sweden	,, 838670
Finland	,, 832985		

All other consulates situated in Oslo.

REPAIRS: Shipyard facilities for all kinds of deck and engine repairs available.

DRY DOCKS: 2 floating docks, 20,000 and 3,000 tons capacity. Nearest dry docks in Horten and Oslo. Distance by sea respectively 24 miles and 46 miles.

REPATRIATION: All facilities available.

AIRPORT: Nearest airport Oslo Airport, Fornebu, situated 16 miles by road from Drammen. Regular services to all parts of the world.

TIME: GMT plus 1 hour. Permanent.

HOLIDAYS: On Saturdays work stops at 1230 hrs., but if ships can be finished, loading and discharging is continued to 2230 hrs.

All Sundays; 1st January; Maundy Thursday; Good Friday; Easter Monday; 1st May; Ascension Day (17th May); Whit Monday; Christmas Day; 26th December.

On Easter, Whit, Christmas, and New Year's Eve work stops at 1400 hrs.

POLICE/AMBULANCE/FIRE: Fire-alarm accidents 832020; First-aid station 831585; Hospital 834585; Police 838170; Taxi 835060.

TELEPHONES: Telephones can be connected if ordered.

GENERAL: Notice will be given to local Agents regarding changes or new developments which can affect usual procedure in port.

SERVICES: Ice-breaker assistance available during winter months.

SHORE LEAVE: No restrictions on shore leave when all formalities in order.

DELAYS: Delays may occur, when very heavy traffic cause shortage of labour.

AUTHORITY: Drammen Havnevesen.

EGERSUND: 58.27 N. 06.00 E.

DOCUMENTS: Health Certificate (forms obtainable from Customs when entering harbour). Crew List, Dangerous Cargo List, Ship's Register. Vessels bound for Egersund must be provided with document signed by Master, setting out specification of cargo to be discharged Egersund, also quantities all provisions and stores on board. Document must include name, tonnage, port of registration, last port, next port, and number of crew and passengers on board.

PILOTAGE: Pilot – if necessary – to be ordered latest 3 hours prior arrival pilot station. Order to be given to Pilot office – telephone 91.328 or to ship's Agent, giving ETA, name of vessel, gross tons, where Pilot required, draft in feet, and discharging/loading place. Vessels entering Egersund liable to inward and outward pilotage dues, mileage money according distance piloted; and pilot dues, whether services of Pilot used or not. Pilot station lying on Eigeroy – and Pilot available for Southern and Northern entrance, from pilot boat. Southern entrance mostly used, max. draft 31 ft. In case of using Northern entrance, ship has to pass bridge between Eigeroy and the continent. Max. height 23.5 m. Max. draft 16 ft.

ANCHORAGE: Any place in harbour available for anchorage. Especially used is Hovlandsviken – 36 ft. draft.

MAX. SIZE: Largest vessel which has entered Egersund – 25,000 d.w.t. Max. draft 31 ft. In harbour there are 2,000 ft. of quayage with 18–27 ft. alongside.

RADIO: Rogaland Radio and Farsund Radio.

TUGS: Not available in Egersund.

STEVEDORES: Ordered by Agent – no ETA to stevedores necessary. Time for ordering gangs for next morning must be given by 1300 hrs. day before.

FRESH WATER: Can be delivered at most discharging/loading places.

FUEL: Gas oil and Light Marine Diesel oil available.

GANGWAY/DECK WATCHMEN: Available – but not compulsory.

OPENING/CLOSING HATCHES: Crew allowed open and close.

CERTIFICATES: On first call Registered Tonnage Certificate necessary – thereafter not required unless gross/net tonnage changed.

CUSTOMS ALLOWANCE: (Dependent size – destination, etc.) each crew member is allowed 100 cigarettes, 20 cigars or 100 grams tobacco and one bottle spirits.

CARGO GEAR: No additional requirements. One 150-ton crane, one 30 ton crane and some mobile cranes 5-15 tons available.

IDENTIFICATION CARDS: Not required.

CONSULS: Denmark and Sweden.

REPAIRS: All minor repairs possible. Service station for electronic aids.

HOLIDAYS: Work can usually be arranged on all holidays.

POLICE/AMBULANCE/FIRE: Police 91.600; Fire 91.500; Hospital/Ambulance Tel: 044-90022

AUTHORITY: Egersund Havnevesen.

FLORO: 61.31 N. 05.02 E.

DOCUMENTS:

2 Manifests.
Crew List.
Provisions List.
Health Document.
Passenger List.

PILOTAGE: Nearest station Fedje (60° 51′ N., 04° 37′ E.). Distance to Floro harbour about 52 nautical miles. Pilot boat a white-painted cruiser-type marked "LOS" on both sides of bow.

Fixed watch on Fedje island covers both Holmengra and Hellesoy. VHF Channels 8, 12 and 16 on M. wave. Listening first 10 minutes of every hour. ETA 24 hours before arrival. Telegram "Feielos". If bad weather, Pilot to be picked up on Eastern side of Fedje Island.

ANCHORAGE: No anchorages close to pilot station. Floro harbour: space of about 1 sq. km., depths from 15 to 30 fathoms.

RESTRICTIONS: Tide difference about 1.5 m. Max. draft entering Floro harbour 36 ft.

MAX. SIZE: Entering Floro harbour: No restrictions in main harbour concerning length and breadth. Max. draft berthing: "Gunhildvagen" (herring factory) 25 ft. and length of 120 m.

NB. – "Gunhildvagen" lies outside main harbour, and has narrow entrance. Weather permitting, ships of 100 m. length and breadth 20 m. can pass.

BERTHING: *Vestlandske Kjopelag:* A bulk grain/molasses terminal for vessels up to 6,000 d.w.t. Berth length, 100 m. Depth alongside 7.0 m. Storage capacity 20,000 tons of Grain/Molasses.

Fugleskjaerskaia: The deep-sea pier to the West of Fugleskjaerskaia is in operation. Fugleskjaerskaia now offers 500 m. of pier frontage, depth from 16 ft. to 43 ft. New section: 36 m., 18 ft. depth; 140 m., 33 ft. depth; and 1 berth 43 ft. depth.

The extension of Fugleskjaerskaia provided 14,000 sq.m. new cargo handling space. A shed of 1,200 sq.m. is now being erected, and is expected to be put to use in January 1979. A Ro/Ro facility is also provided, max. axle load 60 tons.

STEVEDORES: ETA before 1600 hrs. for gangs required next morning.

MEDICAL: Hospital close to harbour, and available any time.

TANKERS: Harbour is only used by small tankers, about 500 to 1,000 reg. tons.

FRESH WATER: Only available alongside berth. Delivery about 30 t.p.h., possibility of 60 t.p.h.

FUEL: Ordinary fuel. Diesel and gas oil delivered by truck. Ships up to about 1,000 reg. tons receive oil-bunkers directly by berthing bunker station.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Mostly done by crew.

CREW IDENTIFICATION CARDS: Not required.

CONSULS: None.

REPAIRS: Most repairs possible.

DRY DOCKS: None. There is a new berth at Ankerlokken Shipyard. Length 100 m. Depth alongside 9–10 m.

AIRPORT: Regular service with DeHaviland Twin Otters, 5 flights to Bergen and 2 to Aalesund each day. (Runway 860 m.).

TIME: GMT plus 1 hour.

HOLIDAYS: Cargo work can be arranged any time, holidays included.

POLICE/AMBULANCE/FIRE: Police 42101; Ambulance 41011; Fire 41000.

TELEPHONES: Can be arranged on board alongside wharf.

SHORE LEAVE: Permitted.

SERVICES: Servicing for all kinds of ships navigation instruments can be arranged, except adjusting radio bearings.

AUTHORITY: Harbour Master. Floro Havnevesen.

AGENT: K. Jansen, Shipping Agent, Stevedore, Shipbroker. Telephones: (057) 42303 A.O (057) 42222–42277. Cable: Shipping. PO Box 15.

FREDRIKSTAD 59.12 N. 10.57 E.

DOCUMENTS:

Bill of Health.
2 Crew Lists.
2 Passenger Lists.
2 Custom List for Crew members and Passengers.
Bill of Lading.
3 Manifests for each port of discharge.

PILOTAGE: Compulsory. Pilot boarding at Faerder Lighthouse, 59.2 N. 10.32 E. Agents report vessel's ETA to pilot station and vessel to give a couple of hours' notice by R/T 2182; kc/s. or VHF Channel 16 to Faerder Pilot. Coast station Tjome Radio LGT or Farsund Radio LGZ can also be used. Harbour Pilot and tugs, when necessary, will be arranged by Agents to meet at Belgen.

ANCHORAGES: Safe anchorage for larger vessels Belgen, East entrance. For smaller vessels anchorage to be pointed out by Pilot or Harbour Master.

RESTRICTIONS: Max. draft, East entrance 36 ft.; West entrance, 17 ft. Otherwise no restrictions.

HEALTH: See "Documents".

If vessel carries Quarantine Flag for contagious diseases, radio communication should be sent to Agent for instructions, otherwise no special regulations.

RADIO: Communication to Agent through Tjome Radio or Rogaland Radio.

TUGS: Three tugs, 750 h.p. and 1,200 h.p. Stronger tugs can be ordered from Oslo if necessary.

BERTHING: As instructed by Harbour Master through Agent, depending on vessel's draft and size.

East River Berths:

Oera Quay:

Southern part, max. draft 36 ft.
Northern part, max. draft 33 ft.

Denofa Lilleborg Quay:

Max. draft 33 ft., 5 m., off the quay.

Additional facilities:

4 warehouses, each at 2,000 sq.m. with cooling 300 sq.m.
4 ordinary cranes up to 10 tons.
1 mobile harbour crane up to 36 tons.
2 Ro/Ro terminals with an open area of about 40,000 sq.m.

STEVEDORES: To be arranged by Agent subject to requirements. 24 hours notice important to obtain in good time accurate ETA.

Ordinary working hours 0700 to 1530 hrs.; Saturday until 1230 hrs. Bulk cargoes are usually discharged in shifts until Saturday 2200 hrs., in the extent stevedores available.

MEDICAL: Master to advise by radio prior arrival if medical attendance required on board. Hospital facilities available.

TANKERS: Discharge pipe-lines usually 6 and 8 in. No slop (residues) discharge facilities. Tanker berths are at BP and Denofa/Lilleborg.

Sulphuric Acid is loaded at Oera Quay.

DENSITY: Brackish water, 2.7% salt water.

FRESH WATER: From shore or by barge.

FUEL: All grades available. For larger quantities, delivery arranged by barge.

GANGWAY/DECK WATCHMEN: Obtainable.

OPENING/CLOSING HATCHES: Crew members allowed to open and close hatches.

SHIP'S CERTIFICATES: To be produced to Customs Authorities on arrival.

CUSTOMS ALLOWANCES: *Tobacco:* 20 cigarettes or 20 grs. tobacco per man, per day. *Wines/Spirits:* 1 bottle of spirits or wine for consumption on board per crew member.

IDENTIFICATION CARDS: Not required, except at the quay of Defona/Lilleborg, when Master, upon arrival, will receive a sufficient number of cards for filling-in for each crew member, to be shown when passing the gate.

CONSULS: Danish, French, Finnish, Dutch, Swedish.

REPAIRS: All repairs possible.

DRY/FLOATING DOCKS:

A/s Fredrikstad mek Verksted: Dry dock 945 ft. length, 126 ft. breadth, 25 ft. draft when docking. Floating dock, 900 tons, 181.6 ft. length, 52.6 ft. breadth, 14 ft. draft when docking.

Sarpsborg mek Verksted: Floating dock, 3,000 tons, 380 ft. length, 55 ft. breadth, 18 ft. draft when docking.

REPATRIATION: All facilities available.

AIRPORT: Fornebo, Oslo, 110 km. From Fredrikstad. Frequent connection by train.

TIME: GMT plus one hour.

HOLIDAYS: New Year's Day (1st January); Maundy Thursday; Good Friday; Easter Monday; Labour Day (1st May); Ascension Day (11th May); Constitution Day (17th May); Christmas Eve; Christmas Day; New Year's Eve.

POLICE/AMBULANCE/FIRE: Police, tel. 17700; Doctor, tel. 13333; Hospital, tel. 11080; Ambulance, tel. 13000; Fire, tel. 12345.

TELEPHONES: May be installed on board at the quay of Oera.

SERVICES: Compass adjusting, laundry, ship chandler for delivery of provisions and bond stores.

SHORE LEAVE: No restrictions.

GLOMFJORD: 66.50 N. 13.57 E.

DOCUMENTS:

3 Crew Lists.
Customs List.
Shipping Manifest.
Health Statement.
Bill of Lading.
Ship's Certificate of tonnage.

PILOTAGE: Pilot station, approach from South, is Aasvaer, Lat. 66° 17′ N. Long. 12° 18′ E., VHF/radio telephone, frequency 2182.

Pilot station, approach from North, is Fleinvaer, Lat. 67° 13′ N., Long. 13° 42′ E. Order Pilot over Bodo Radio, tel. Bodo 22115.

ANCHORAGE: No berth for anchoring in Glomfjord but possible anchor at Sandaabukten close to Glomfjord.

MAX. SIZE: Quay length 317 m. and depth 8 m.

HEALTH: Health certificate – only for first port in Norway.

RADIO: Sandnessjoen or Bodo Radio station.

VHF: On quay. Call: Hydro Glomfjord Port station on Channel 16.

TUGS: None.

BERTHING: No specific requirements relating to berthing.

STEVEDORES: In accordance with Charter Party.

MEDICAL: Medical aid in Glomfjord, and hospital in Bodo.

TIDE: Difference between high and low water about 3m.

FRESH WATER: Alongside quay.

FUEL: None.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CERTIFICATES: Usual certificates.

CUSTOMS ALLOWANCES: 200 gr. tobacco or 200 cigarettes per man. 0.75 litre spirits or 0.75 litre wine per man.

CARGO GEAR: Discharging by cranes on quay. Loading by conveyor.

IDENTIFICATION CARDS: Usual passport necessary.

CONSULS/REPAIRS/REPATRIATION: None.

AIRPORT: Airport in Bodo.

TIME: GMT plus 1 hour. Permanent.

HOLIDAYS: See "Drammen".

POLICE/AMBULANCE/FIRE: Police station 52147 Glomfjord.

TELEPHONES: On quay.

REGULATIONS: No particular or unusual regulations. Control by passing gate between dock area and surrounding field.

SHIPMASTER'S REPORT: 1976

Anchorage: The nearest anchorage to the berth, which is part of Norsk Hydro's chemical plant is Sandabukta, about 6 miles away. It is safe and sheltered and the Agent will board there. Communication with Glomfjord is by VHF Channel 16 or via the local boatman with whom private arrangements for shore leave are possible.

Clearance: Ship is boarded on arrival at the anchorage by the Glomfjord Customs officer who also acts as Immigration and Port Health.

Weather: This vessel called at Glomfjord in April but weather conditions were not attractive. Frequent snow squalls reduced visibility to zero but were usually short-lived.

Pilotage: There are no harbour Pilots at Glomfjord. If proceeding direct to berth, sea Pilot will put ship alongside. If awaiting berth at Sandabukta anchorage, Pilot leaves there and it is normal for ships to complete the passage unaided. A Pilot can be obtained from Bodo but is not always available. If another ship is arriving at the anchorage, Pilot will transfer.

AUTHORITY: Norsk Hydro a.s. Glomfjord Fabrikker.

HALDEN: 59.08 N. 11.25 E. (See Plan Book)

DOCUMENTS: See "Bergen".
PILOTAGE: Pilot boat at Faerder light station. Pilot boat at Herfol Losstation-Hvaler. Ordering usually over Radio Land Station. Tjome Radio = LGT (also VHF). Signals according to ordinary international requirements. Exact area for Pilot boat: Faerder light station (Store Faerder); Herfol pilot station; Hvasser pilot station.
ANCHORAGE: At Faerder light station in Oslofiord-Singlefiorden West side.
RESTRICTIONS: No special restrictions but larger vessels have to take necessary care with passing Svinesund. The tide current altering according to high and low water time.
MAX. SIZE: For the harbour inside Svinesund (Main Harbour) length 560 ft., beam 70 ft., draft. 25 ft.
HEALTH: Pratique, ordinary.
TUGS: If wanted; outside Sponviksskansen light with the entrance to Svinesund. Usual, ship's lines.
RADIO: All radio services over Tjome Radio-Land Station (use the ordinary international frequency — (600-705-800 m.).
BERTHING:

Quay	*Depth* (ft.)	(m.)
Ytre Molbrygge	23	7.2
Indre Molbrygge	23	7.2
Jernbanebryggen	22	6.9
Krankaien	27	9.0
Brokaien	23	7.2
Sundsbryge	16	5.3
Felleskjopet	16	5.0
Corn Silo	12	3.8

TANKERS: Max. 20,000 d.w.t. are received.
FRESH WATER: Available; good quality.
FUEL: Available.
FIRE PRECAUTIONS: According to Harbour regulations.
GANGWAY/DECK WATCHMEN: Not required.
OPENING/CLOSING HATCHES: Carried out by crew.
IDENTIFICATION CARDS: Required.
REPAIRS: Only small repairs carried out.
DRY DOCKS: None.
REPATRIATION: No facilities.
AIRPORT: Nearest Fornebu-Oslo.
TIME: 1 hour behind GMT.
POLICE/AMBULANCE/FIRE: Fire 81212; Police 82250.
TELEPHONES: None available for shipboard use.
SHORE LEAVE: Allowed.

HAMMERFEST: 70.40 N. 23.40 E. (See Plan Book)

DOCUMENTS: See "Bergen".
PILOTAGE: Entering from sea, a state Pilot is compulsory as one has to pass through prohibited sea area. Pilot should be ordered 4 hours in advance, and boards ship at Tarhalsen (situated at Eastern-most tip of Soroy island). Harbour Pilot boards outside harbour breakwaters.
ANCHORAGE: Anchoring in harbour or as appointed by the state Pilot or harbour Pilot.
MAX. SIZE: Alongside quay ships up to 30,000 g.r.t., with draft max. 30 ft. For anchorage no limitation.
RADIO: Hammerfest Radio, equipped with VHF.
TUGS: None.
STEVEDORES: Normal working hours: Monday–Friday 0700–1630 hrs.
MEDICAL: Hospital facilities available at Hammerfest.
TANKERS: Discharge line 8 in.
DENSITY: Salt water.
FRESH WATER: Capacity 300 t.p.h. at Harbour Board quay, no water barge.
FUEL: All grades, except heavy fuel oil, available.
CUSTOMS ALLOWANCES: See "Stavanger".
IDENTIFICATION CARDS: Not needed.
CONSULS: French, Danish, Finnish, Icelandic, Netherlands and Swedish Vice-Consuls.
REPAIRS: Slipway for smaller ships, up to 200 ft. Only minor repairs and radar repairs available.
DRY DOCKS: None.
REPATRIATION: Daily connection by ship and air.
AIRPORT: Hammerfest Airport. Regular service several times a day.
AUTHORITY: Hammerfest Havnevesen.

HARSTAD: 68.48 N. 16.39 E.

PORT LIMITS: Inside a straight line from Trondenes Church to Stangnes Light.
DOCUMENTS:

2 Crew Lists.
2 Passenger Lists.
Derat Certificate.

PILOTAGE: If entering via Andenes, 12 hours advance notice of ETA in order to arrange Pilot. If entering via Lodingen, 2 hours notice. VHF Channel 16 both at Lodingen and on pilot-cutter at Andenes.
ANCHORAGE: Inside harbour limits, fairly good anchorages available, Pilot will assist.
RESTRICTIONS: No restrictions, only all foreign ships must have a Coast Pilot on board in inland waters.
MAX. SIZE: Any sizes can anchor in harbour.
HEALTH: In case of suspected disease doctor has to be called by radio before entering. After calling at another Norwegian port and no disease, pratique is not necessary.
RADIO: Routing of ETA cables to Agents at Harstad is best over Harstad Radio. VHF installed at Harbour Office.
TUGS: Two small tugs available.
MEDICAL: No advance notice required. Hospital facilities available. No medical information required if no suspected disease on board.
SPECIALISED CARGO-HANDLING FACILITIES: Two coal bunkering stations; draft about 24 ft.; equipped with cranes running on rails. No other specialised docks.
TANKERS: Two berths. Esso 33 ft. Norol 36 ft.
TIDE: Rise in tide about 6 ft.
FRESH WATER: Available at most quays.
FUEL: All grades available. In the Winter 3–4 hours notice required.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: By crew.
CERTIFICATES: Usual International certificates.
CUSTOMS ALLOWANCE: Tobacco: 200 cigarettes or equal amount of tobacco. Wine and/or Spirits: Spirit half a bottle per person.
IDENTIFICATION CARDS: Not needed.
CONSULS: Per Kind & Son – Iceland. O. Galschiodt – Finland. Kr. Holst – Denmark.
REPAIRS: All types of repairs possible.
DRY DOCKS: 1 dry dock 110 m. long, 17 m. wide.
REPATRIATION: Facilities available.
AIRPORT: New airport in operation at Evenes, about 1 hour's drive from Harstad by road.
TIME: GMT plus 1 hour.
HOLIDAYS: Cargo work can be arranged on holidays, except 1st and 17th May, Easter Day and Christmas Day.
POLICE/AMBULANCE/FIRE: Tel. 62010–62000–61122.
TELEPHONES: Available, can be arranged by Agent or Dockyard.
SERVICES: Harbour Office, Tel. 62880 62892. Compass adjusting.
SHORE LEAVE: Allowed.
AUTHORITY: Harstad Havnekontor.

HEROYA: 59.07 N. 09.38 E.

DOCUMENTS:

Clearance documents – forms obtainable from Custom officers on arrival.
Derating Certificate.
Bill of Lading.
Manifest.
2 Crew Lists.
Ship's Register.

PILOTAGE: Ships Agent gives ETA Pilot station 24 hours before arrival and direct to Pilots 2 hours before arrival. Telegraphic address: Pilotstation, Langesund. VHF Channel 16 to be used when contacting Pilots. Pilot boards at Steingrunnen light buoy Langesund bay, 58° 55′ N.; 09° 44′ E. Flag, sound and morse signal: G. Pilotage compulsory for all foreign vessels but dispensation can be obtained for smaller Scandinavian vessels.
ANCHORAGES: All anchoring at Frierfjorden.
RESTRICTIONS: No restriction on night entry except for large vessels when Pilots prefer daylight.
MAX. SIZE: Max. draft 32 ft. 6 in., max. length 600 ft. entering Kjorttingen between Langesund and Brevik.
HEALTH: See "Documents". Norwegian Health Certificate required on clearance inwards.
RADIO: Cable Agents giving ETA, draft and cash required via Tjome Radio/LGT or Farsund Radio/LGZ.
TUG: Tugs join at berthing place. Ship's lines used.
BERTHING: No specific requirements relating to berth.
CARGO HANDLING FACILITIES: On the East side of the river, a berth of 800 ft. length, 20 to 21 ft. alongside. A new quay for vessels up to 10,000 tons, 26 to 27 ft. depth, specially for handling bulk cargoes.

No berth equipped for handling roll-on/roll-off traffic, but berth available for liquid chemical and LPG carriers.

Oil pier Norsk Hydro A/S, vessels up to 20,000 d.w.t.
Main quay Norsk Hydro A/S, length 1,838 ft., draft 26 ft. to 34 ft. 6 in.
Western quay Norsk Hydro A/S, length 1,263 ft., draft 26 ft. to 32 ft. 6 in.

CRANES:

Main quay Norsk Hydro A/S:
4 cranes reaching 10-11 m. outside quay border capacity 6 tons.
2 cranes reaching 18 m. outside quay border capacity 6 tons.
3 elevators for loading of bagged cargo reaching 16 m.
Western quay Norsk Hydro A/S:
2 cranes reaching 18 m. outside quay border capacity 7 tons.
1 crane reaching 15 m. outside quay border capacity 8 tons.
1 crane reaching 9 m. outside quay border capacity 3 tons.
3 elevators for loading of bagged cargo reaching 8 m.
Deep Water Jetty:
2 cranes reaching 16 m. outside quay border capacity 10/12 tons for bulk cargo only.
1 crane capacity 5 tons for handling of stores, etc.

BRIDGES: Brevik bridge max. height 45 m. Porsgrunn bridge only when proceeding to Menstad, Borgestad, Waterloo and Skien,

liftbridge with breadth of 30 m. Sound signals for passing bridge inward, 1 long and 2 short. Outward signals, 1 long and one short.
STEVEDORES: Ordered by Shippers/Receivers or Agents.
MEDICAL: All medical assistance to be arranged via Agents.
TANKERS: Discharge lines 4 in., 6 in., 8 in.
DENSITY: Brackish 4–6 in. allowance.
FRESH WATER: Obtainable various quays.
FUEL: All grades available.
FIRE PRECAUTIONS: Tankers discharging, smoking only by officers in saloon, crew in messroom.
GANGWAY/DECK WATCHMEN: Available but not compulsory.
OPENING/CLOSING HATCHES: Crew normally open and close. Otherwise according Charter Party.
CERTIFICATES: Registered tonnage certificate; Derating certificate. Otherwise normal international certificates.
CUSTOMS ALLOWANCES: 400 cigarettes for the Master and 200 for each crew member. *Wine and/or spirits,* 4 bottles spirit for Master and half bottle for each crew member.
CARGO GEAR: No additional requirements, but using vessel's rain tents.
IDENTIFICATION CARDS: Only necessary at quays belonging to Norsk Hydro. Special identification cards will be delivered to Master on arrival.
CONSULS: Belgium 20083 (Skien), Denmark 50069, Germany 25093 (Skien), Holland 22742 (Skien), Finland 52620.
REPAIRS: Repairs possible.
DRY DOCK: Draft 14 ft., length 155 m., breadth 20 m., also 4 smaller docks.
REPATRIATION: Facilities exist for effecting crew changes and repatriation.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: New Year's Day, Maundy Day, Good Friday, Easter Eve (half day), Easter Monday, Christmas Eve (half day), Christmas Day, 26th December, New Year's Eve (half day).
POLICE/AMBULANCE/FIRE: Police 51040; Ambulance 51070; Fire 51522. Other numbers: Pilot station 73135; Tug station 50844; Norsk Hydro Central 51120; Porsgrunn Bridge 52492; Custom House 54540; Taxi 54112; Harbour office: 52308.

HORTEN (on West Side Oslo Fjord): 59.24 N. 10.28 E.

DOCUMENTS: Health Certificate, Provision List, etc., all forms obtainable from Customs Officer boarding on arrival. Ship's International Register and 2 copies of Manifest (with or without freight).
PILOTAGE: Compulsory for foreign ships over 50 grt. Pilot station at Hvasser (Sandosund) outer Oslofjord, tel. Hvasser 178 via Tjome Radio, VHF Channel 16 and RT 2182 kc/s. Cutter or motorcruiser at Faeder lighthouse bearing 3 miles North-N.E. White hulls with word LOS in black letters. Pilot usually ordered through Agent. Inner Harbour, Horten, compulsory Harbour Pilot ordered through Agent.
ANCHORAGE: Langgrunn outside Horten. Up to any size vessel.
RESTRICTIONS: No restrictions night entry, but inner harbour at Horten only entered with Harbour Pilot on board.
MAX. SIZE: Ships up to max. length 900 ft. (anchored moorings outside jetty). Deep-water Wharf, length of N.E. side 530 ft. Draft 28 ft.
HEALTH: See "Documents". Advise Agent if suspect any disease or fever.
RADIO: Cable Agent giving ETA via Tjemeradio. Local Harbour Master's Office can be contacted by VHF Channels 14 or 16. Hortens Brygge's "Pilotboat" when in service VHF Channel 16.
TUGS: Tugs if required use ship's line. Tugs ordered through Agent.
BERTHING: Max. draft alongside quay 28 ft.
STEVEDORES: Ordered by Agents.
MEDICAL: No special notice required, but preferred if urgent. Local hospital-Horten Sykehus tel. 43191.
TANKERS: Tank Cleaning Installation for slop discharge. Draft 23/40 ft. at oil jetty.
DENSITY: About 1022.
FRESH WATER: Available at most berths and from lighter.
FUEL: All grades. Direct from Installation and also by lighter. If large quantities, give earliest possible notice.
FIRE PRECAUTIONS: Usual restrictions and No Smoking inside Cleaning Installation gate.
GANGWAY/DECK WATCHMEN: Available, not compulsory.
OPENING/CLOSING HATCHES: Usually opened/closed by vessel's crew.
CERTIFICATES: Ship's International Register and usual certificate.
CUSTOMS ALLOWANCES: Tobacco, 200 cigarettes or 250 grammes tobacco 200 leaves cigarette paper for persons over 15 years only. Wine and/or Spirit, Spirit of max. 60% 1 bottle (0.75 litre) and 1 litre wine (1.25 bottle) – 2 litres of wine if no spirits and 2 litres of beer (for persons over 21 years only).
CARGO GEAR: No additional requirements except when extra heavy lifts (20 tons).
IDENTIFICATION CARDS: Not needed.
CONSULS: Only Finnish Consul in Horten tel. 42189, but most important consulates in Tonsberg – 18 kilometre distant. British Vice-Consul, Tonsberg tel. 11605, Dutch Vice-Consulate 13224.
REPAIRS: Any kind can be carried out.
DRY DOCKS: Dry docks for vessels up to about 60,000 d.w.t.. at A/S Horten Verft.
REPATRIATION: Crew changes, etc., can be arranged.
AIRPORT: Nearest international Airport is Oslo Airport (Fornebu), but charter flights may be arranged to and from Sandefjord Airport – any size of plane, and small aircraft at Jarlsberg Airfield. Distance to Sandefjord about 30 kilometre, to Jarlsberg about 18 kilometre.
TIME: GMT plus 1 hour. No alterations during year.
HOLIDAYS: New Year's Day; Thursday before Good Friday; Good Friday; Easter Monday: 1st May; 7th May; (Ascension Day); 17th May; Whit Monday; Christmas Day; 26th December. 24th December is half holiday – work stops at noon or 1300 hrs.
POLICE/AMBULANCE/FIRE: Horten for immediate help phone 000 covering Police, Ambulance and Fire.
TELEPHONES: Can be placed on board at Deepwater Wharf, the Cleaning Installation and the Dockyard (A/S Horten Verft) at comparatively cheap rates.
GENERAL: A/S Horten Verft are licensed Sulzer builders. Important Electronic Industry.
SERVICES: Tank cleaning and facilities for discharge of tank washings. Adjusting of all kinds of ship's instruments.
SHORE LEAVE: Crew members are allowed on shore.
REGULATIONS: Compulsory harbour Pilot when calling at Inner Harbour and yard (A/S Horten Verft).
DEVELOPMENTS: Committee at present working with plans for building more berths for ferries and traffic.
AUTHORITY: Harbour Master. Horten Havnekontor.

HOYANGER: 61.10 N. 06.04 E.

Hoyanger – Aluminium Works – located North of Bergen in outer part of Sognefiord. 61° 10′ 18″ N. 6° 04′ 07″ E.
DOCUMENTS: See "Bergen"
PILOTAGE: Compulsory. Belonging to Bergen Customs district and unless otherwise arranged beforehand vessels from abroad must call Bergen for inward clearance.
LENGTH OF QUAY: 360 ft. Depth alongside: 27 ft. Cranes. Ice free.

HUSNES: 59.52 N. 05.46 E. **(See Plan Book)**

DOCUMENTS:
3 Crew Lists.
2 Passenger Lists.
2 Bills of Lading
2 Manifests.
PILOTAGE: No pilotage in port. Sea Pilots in stations at Skudesnes, Kvitsoy (or Kopervik) and Utsira.
ANCHORAGE: 59° 53′ N. 05° 45′ E. in 20 m.
MAX. SIZE: 70,000 tons.
HEALTH: Custom authorities to be advised on entrance.
RADIO: Best radio stations: Rogaland Radio. ETA to Receiver's cable address: "Soeratuminium, Husnes".
TUGS: Normally not necessary. If wanted, can be ordered from Bergen or Haugesund.
BERTHING: 240 m. Depth alongside: South 10 m., North 17 m. 2 cranes, on quay, each 8 tons at 20 m. and 1 pneumatic gear for discharging alumina. Capacity 5,000 tons per 24 hours.
STEVEDORES: Normal working time: Monday–Friday 0700 – 1530 hrs.
MEDICAL: Hospital at Stord (about 1 hour by ferry and car).
TANKERS: Discharging line 9 in.
FRESH WATER: Available, direct from quay to ship. Charge Nkr 100, plus Nkr 1.0 per ton.
FUEL: None available.
GANGWAY/DECK WATCHMEN: Crew.
OPENING/CLOSING HATCHES: To be carried out by crew.
CARGO GEAR: Per Norwegian safety regulations for loading and discharging.
IDENTIFICATION CARDS: Crew need cards signed by Master.
CONSULS: None.
REPAIRS: Only small workshops.
DRY DOCKS: None.
REPATRIATION: No facilities for obtaining new crew (Haugesund or Bergen).
AIRPORT: Bergen–Flesland. 2 – 2.5 hours from Husnes to Bergen by hydrofoil, and 0.5 hours by plane.
POLICE/AMBULANCE/FIRE: Alarm telephone number 121 or 65.
TELEPHONES: Agent has one telephone, which can be placed on board. (No. Kvinnherad 71436.)
SERVICES: No services at quay. Tank cleaning at Bergen, compass adjusting at Haugesund.
SHORE LEAVE: Permitted. Crew required proceed direct from quay to gate of plant.
AUTHORITY: *Shippers/Receivers:* Sor-Norge Alumium a/s.

AGENTS: Sor-Norge Aluminium A/S – Husnes. Mr. Rossland, Tel. Kvinnherad 054-71122. Telex 42420

KIRKENES in Bokfjord: 69.36 N. 30.03 E.

DOCUMENTS:
3 Crew Lists.
Bill of Health.
Bill of Lading.
Ship's Certificates.
PILOTAGE: Pilot to be notified 4 hours in advance, boards vessel at Oksebaasen, and to be contacted over Channel 16 VHF. Pilot vessel carries white flag "H".

ANCHORAGE: As directed by Pilot.
MAX. SIZE: Oil carriers 20,000 d.w.t., draft 33 ft. Iron ore carriers 150,000 d.w.t. draft 54 ft.
HEALTH: If any contagious sickness quarantine to be informed by radio.
RADIO: Vardo Radio.
TUGS: Available 2,200 h.p. Join vessel within harbour basin. Tugs' lines to be used.
BERTHING: Vessel to employ harbour Pilot.
MEDICAL: Agents to receive advance notice of required medical attention. Hospital facilities available.
TANKERS: Diameter of load/discharge lines 8 in. Max. draft 33 ft.
DENSITY: Specific weight of water at 17.5 centrigrades=1.02622–1.011 (varies very much with time of year).
FRESH WATER: Available, delivered through pipes from quay.
FUEL: None.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Must be carried out by crew.
CUSTOMS ALLOWANCES: (Tobacco), 100 cigarettes or 100 gram tobacco for each crew member. (Wines/Spirits), 1 opened bottle of hard liquor, 1 opened bottle of wine, Reasonable amount of beer.
CARGO GEAR: 2 cranes, 20 and 75 tons.
IDENTIFICATION CARDS: Not needed.
CONSULS: Sweden, Finland, West Germany.
REPAIRS: No repairs possible.
DRY DOCKS: None.
REPATRIATION: Facilities exist for crew changing, but normally no crew available. Arranging repatriation possible.
AIRPORT: Distance to airport 10 km. Airport served by regular airlines, 2 flights per day.
TIME: GMT plus 1. Permanent.
HOLIDAYS: 1st May, 17th May. Work carried out if permission given by the authorities.
POLICE/AMBULANCE/FIRE: Fire alarm 91942; Ambulance 91701; Police 91151.
TELEPHONES: Ship's telephone connections available.
SERVICES: Compass adjusting.
SHORE LEAVE: Crew members allowed ashore.
AUTHORITY: Aktieselskabet Sydvaranger.

KRAGERO: 58.52 N. 09.25 E.

DOCUMENTS:
Ship's Register.
Passenger List.
Crew List.
1 List of Articles – radios, cigarettes, tobacco, spirits, etc.

If on inspection, articles or quantities not in conformity or in excess, Master responsible, articles removed and heavy fine imposed.
PILOT: Has to be ordered by Agent on given ETA. The Pilot boat will be at the light buoy 1 hour ahead of time given. Listening on Radio 2182 kc/s or VHF Channel 16. Calling "Pilotboat Kragero".
ANCHORAGE: Almost anywhere in the Fjord, watch out for sign of waterpipes and telephone cables.
RESTRICTIONS: Weather permitting, draft up to 26 ft.
RADIO: Tjome Radio station or Farsund Radio Station.
TUGS: Only small tugs in harbour, tugs available from nearby town order to be given 24 hours in advance.
STEVEDORES: To be ordered by Agent. Notice to be given before 1530 hrs. for next morning, or 3 hours before work to start.
MEDICAL: Doctor and hospital facilities available.
FRESH WATER: Available at centre quay.
FUEL: May be available with trucks ordered from nearby town.
OPENING/CLOSING HATCHES: To be carried out by crew.
CUSTOMS ALLOWANCES: 100 cigarettes or 50 cigars. One bottle wine or spirits per man.
CONSULS: France Tel: 81555. Denmark Tel: 81055. Netherlands Tel: 81020.
REPAIRS: Small repairs may be available.
DRY DOCKS: For ships up to 350 dwt.
AIRPORT: Kristiansand 170 Km. away. Oslo 200 Km.
HOLIDAYS: Work can be arranged on most Holidays, except New Year's Day, Easter Day, 1st and 17th May and Christmas Day.
TELEPHONES: Police, 81401. Ambulance, 81436. Fire and First Aid 81200. On most berths telephones are available.
SHORE LEAVE: No restrictions.

KRISTIANSAND S.: 58.09 N. 08.00 E. (See Plan Book)

DOCUMENTS:
3 Cargo Manifests for Customs
Tobacco/Spirits List
Bill of Health (if arriving from outside Scandinavia)
Passenger List for Immigration
No Crew List required

PILOTAGE: Oksoy Pilot Station. Compulsory pilotage for non-Norwegian ships, 2 hours notice minimum, contact on ordinary shipping channel, or VHF call channel 16, Pilot boat marked "LOS" on each bow, international light or sound signals, Pilot boarding between Oksoy and Gronningen Lighthouse, no special anchorage for vessel awaiting a pilot, but pilots available around clock.
ANCHORAGE: Several good and safe anchorages in inner and outer harbour for vessels of any size.
MAX. SIZE: Any size in harbour. Max. 24,000 gross tons at quay.
RADIO: Kristiansand Radio. Call sign LGR. Farsund Radio LGZ.
RADAR: At Oksoy Pilot Station.
VHF: Port Radio, Channels 16, 12 and 14.
TUGS: Lekterkompaniet. Signal: L, Tel. 21195. 3 tug-boats 700–180–180 h.p. A/S Sorslep. Tel. 22590. Night: 29521. 2 Tugs 725–325 h.p. 1 mooring boat.
BERTHING:

Berth	*Depth at MLW (ft.)*
Railway and Car Ferry Terminal	20
Car Ferry Terminal	26
Car Ferry Terminal	26
Coastal Berths (4)	16–26
Roll-on/Roll-off Terminal	30
Fishing Harbour	20
Tug Terminal	12
Grain, Concrete and Overseas Terminal	33 (North end) 40 (Mid-section) 60 (South end)
Oil Terminal	40
Overseas Ro/Ro Terminal	30
General Cargo Terminal	30

STEVEDORES: ETA to Agents who arrange stevedoring.
MEDICAL: Hospital in Kristiansand. Doctor available around clock.
TANKERS: B.P. Bunker Station. 1 Berth depth 33 ft. Shell Bunker Station Odderoy, 1 Berth depth 31 ft.
FRESH WATER: Available from quays and water barges.
FUEL: All grades up to 2000 sec. available at short notice.
GANGWAY/DECK WATCHMEN: Available if required.
OPENING/CLOSING HATCHES: Normally carried out by crew, but can be done by stevedores.
CUSTOMS ALLOWANCES: 200 cigarettes or equivalent tobacco for each crew member per 10 days and 1 bottle spirits.
CONSULS:

Sweden	Tel. 26160	France	Tel. 26210
Denmark	,, 23097	Netherlands	,, 26990
Finland	,, 29596	Greece	,, 24446
Great Britain	,, 24452	Iceland	,, 21068
Germany	,, 22455	Portugal	,, 29616
Spain	,, 21040		

REPAIRS: All types of deck and engine repairs possible.
DRY DOCKS: Largest dry dock; length 689 ft. width, 100 ft. width at entrance, 95.9 ft. Depth 25 ft. for vessels up to 13,000 d.w.t.
REPATRIATION: Can be arranged.
AIRPORT: Situated 17 km. from harbour, served by regular air lines.
TIME: GMT plus 1 hour, permanent.
TELEPHONE: Police, 29500; Ambulance, 26200; Fire, 21010. Possible to place telephone on board at some quays.
AUTHORITY: Kristiansand Havnevesen.

KRISTIANSUND N.: 63.07 N. 07.43 E.

DOCUMENTS:
1 Crew List.
1 Passenger List.
1 Customs Document.
1 Health Document.
1 Ship's Papers.
1 Stores List.
3 copies Manifest.
3 copies Bill of Lading.

PILOTAGE: From open sea. Pilot is taken on board at Grip Lighthouse. Watch 24 hours a day. Vessels approaching from the sea and desiring a pilot should order the Pilot at 24 hours notice as far as possible.
RADIO: From ship at sea via Kristiansund Radio (LFK) or Alesund Radio (LGA) direct to the Sea Pilot. Watch calling frequency 2182 or by VHF radio-telephone, calling Channel 16. Harbour Office is manned day and night, telephone 71483.
ANCHORAGE: Several good and safe anchorages in inner and outer harbour for vessels of any size.
MAX. SIZE: Max. depth alongside quay 40 ft., length of all quays about 900 m.
TUGS: None, but small motor vessels assist when required.
BERTHING:

Storkaia	length 330 metres,	depth 19-40 ft.
Holmakaia	,, 100 ,,	,, 34 ,, (East side)
,,	,, 80 ,,	,, 24 ,, (South side).

BRIDGES: Sorsund Bridge 140 m. wide, 38 m. high. Nordsund Bridge 50 m. wide, 28 m. high.
STEVEDORES: Obtained by Agents provided ETA given 12 hours before arrival.
FRESH WATER: Delivered from quay or from water boat.
FUEL: All grades available.
GANGWAY/DECK WATCHMEN: Available but not necessary.
OPENING/CLOSING HATCHES: This work will normally be carried out by crew, but can be done by stevedores.
CUSTOMS ALLOWANCES: For each man – 200 cigarettes, 1 bottle of spirits for 10 days.
IDENTIFICATION CARDS: Not required.

CONSULS: Following countries are represented at Kristiansund N.:

Finland Italy Spain
France Netherlands Sweden
Germany (FDR) Portugal Uruguay
Great Britain Denmark

REPAIRS: All kinds of repairs may be effected, deck and engine. Patent-slips for vessels up to 250 ft. long, crane-lift up to 40 tons. Ice-free harbour.

REPATRIATION: All facilities available.

AIRPORT: Kristiansund Airport, Kvernberget. Passenger flights 3 times a day to Oslo. 2 flights a day to Trondheim and Bergen. Situated about 4 miles from centre of Kristiansund N. (about 15 minutes by car).

TIME: GMT plus 1 hour.

HOLIDAYS: 1st May and 17th May.

POLICE/FIRE/AMBULANCE: Police, tel. 75000; Ambulance, tel. 72011; Fire, tel. 71000.

TELEPHONES: May be installed during the ship's stay at the quay.

SERVICES: Laundry, ship-chandlers for delivery of provisions and bonded stores, and servicing for all kinds of ship's navigation instruments can be arranged.

SHORE LEAVE: Allowed.

AUTHORITY: Harbour Master, Kristiansund N. Havnevesen.

LARVIK: 59.03 N. 10.02 E. (See Plan Book)

PORT LIMITS: The offical port limits for the port of Larvik is a line from Stensnes in East to Rodbergodden in West. Notices of Readiness for loading or discharging, however, will be accepted when the vessel is anchored in any of the anchorages in inner Larvik Fjord.

DOCUMENTS:

Maritime Declaration of Health.
Tolliste i.e. tobacco & curio list for total number of crew.
1 "Varefortegnelse med proviantliste", i.e. cargo & provisions list. (2 copies required for bulk cargoes).
"General-varefortegnelse", i.e. list of general cargo – 3 copies required.
3 Ship's Manifest.
3 Bills of Lading.

Customs Officer will accept tobacco & curio lists, also provision lists filled in on foreign forms, if all goods correctly stated.

PILOTAGE:

1. Vessels approaching from the sea and desiring a Pilot shall order the Pilot at 24 hours notice insofar as possible and confirm arrival at pilot station at 2 hours notice:
   (a) by telephone or telegram from ship to the pilot office concerned or sea pilot station over an official coastal radio station.
   (b) by telephone or telegram from broker/shipowner to the pilot office concerned or sea pilot station.
2. For direct connection between ships desiring Pilot and the pilot service, VHF-radio telephone Channel 16 (156.8 mHz) shall be used for calling and reply, and a VHF-radio telephone ship-to-ship Channel or harbour Channel shall be used for conversations.
   Ships not equipped with VHF-radio telephone may use the distress and calling frequency 2182 kHz for calling pilot vessel, but both the ship desiring Pilot and the pilot vessel shall in such cases immediately turn to ship-to-ship frequency. At such connections minimum transmission effect shall be used.
3. Vessels lying in port and desiring Pilot will order the Pilot from the nearest pilot office during its office hours and if possible at 4 hours notice.
4. Vessels approaching from the sea as well as vessels lying in port shall, when making an advance order, state the name and destination of the vessel and whether one or two Pilots are desired.
5. The Pilots will on the whole be despatched to the ships in accordance with the advance orders, and vessels are therefore requested to comply with the foregoing rules as far as possible in order to avoid having to wait for Pilot.
6. The international provisions for summoning Pilots by signal flags or blue lights, etc., are still in force but should in future be used as a supplement to the radio communications or as the sole communication in emergencies.
7. These provisions came into force on the 1st January 1971.

Description of pilot boat: white painted, teak wheelhouse,, 2 masts, "Los" on both sides of bow. Light and sound signals: international signal "G" with flag, sound or light. Exact area where pilot vessel situated when on station: "Rakke" sound and light buoy, 5 cables off. In poor weather Pilot will board vessels off "Ramsholmflu" light and bell buoy. If Pilots not available, pilot vessel will conduct vessels to safe anchorage.

Please note: The following temporary changes regarding the pilot service. From October 1st 1976 and until further notice the pilot station is keeping radio watch all days between hours 0900 to 2000 hrs. only. All vessels requiring Pilot to enter the Port of Larvik should advise their requirements and give their ETA's during said hours.

ANCHORAGE: Safe anchorages at end of fjord, West side. Masters should consult Pilots and/or charts before anchoring. Ample water and good holding ground for all sizes of vessels.

MAX. SIZE: Largest vessel berthed at Larvik Canal Quay, LOA 644 ft. 8 in., breadth 83 ft. 3 in., max. draft 32 ft. 6 in.

HEALTH: Advise Agents of any suspected disease or fever on board by radio or telephone before entering. Vessel will then anchor in anchorage and be boarded by state doctor. When vessel is healthy, Custom Officer will grant pratique.

RADIO: Tjome Radio LGT, Rogaland Radio LGQ.

TUGS: No tugs at Larvik. Tugs to be ordered via ship's Agents from Fredrikstad or Porsgrunn. If tugs required Agents should be given 12 to 24 hours notice. Tugs join vessel in fjord off harbour breakwater. Extra charges for use of tug's lines.

BERTHING:

Revquay West (Vester Revkai): Length 118 m. Depth alongside 9 m. Newest quay for general and miscellaneous cargo. New warehouse, measuring 1600 sq. m. Asphalted area outside measuring 10,000 sq. m. Railway track.

Adjacent to this quay is the roll-on/roll-off berth. Max. length vessels 150 m. Depth alongside 8 m.

Kanalquay (Kanalkaia): Kanalquay North – length 335 m. Depth. 10 m. Kanalquay West – length 120 m. Depth 6 m. Kanalquay South — length 90 m. Depth 5 m.

Facilities available at Kanalquay and Revquay West: Railway tracks, 4 portable electric cranes, capacity 6-23 tons, 3 mobile cranes, capacity 14-30 tons. Portable pneumatic grain discharging plant, capacity 85,000 tons. Warehouses measuring 4,000 sq. m.

Outdoor storage area: 20,000 sq. m.

East Pier (Ostre Brygge): Length 130 m. Depth 8 m. New Ferry quay with roll-on/roll-off facilities. Car park for 560 cars or 52 lorries/trailers 18 m.

West Pier (Vestre Brygge): Depth—east side 6 m. West side 7 m. Ferry quay with roll-on/roll-off facilities on both sides. Good parking. Passenger terminal. Customs.

Private Wharves; Treschow-Fitzoe Pulp Quays—West side: Length 50 m. Depth alongside 5 m. East side: Length 90 m. Depth alongside 6.3 m.

B.T. Transport A/S: Length 50 m. Depth 3-11 m.

STEVEDORES: Gangs to be ordered before 1600 hrs. and cranes before 1500 hrs. for following day. During office hours 2 hours notice required.

MEDICAL: No advance notice required, unless in urgent medical cases and when ambulance needed. No particular inoculations required.

TANKERS: For larger oil-tankers for asphalt works, 8 in. connections required; for coasting vessels, 6 in. connections used. Fuel oil and diesel oil shipped in coastal vessels require 6 in. connections; kerosene, white spirit and gasoline, 4 in. connections. No slop tanks. 2 berths for tankers, 1 for larger vessels and 1 for coasters. Max. draft in both berths 32 ft. 6 ins.

DENSITY: Salt water, brackish at times.

FRESH WATER: Delivered by hose from wharf.

FUEL: Fuel oil, gas oil, diesel oil, delivery rate by tank lorry 20 t.p.h.

FIRE PRECAUTIONS: Any vessel discharging benzine must have city fireguard on watch. 30 m. clearance required to next vessel. Ships loading explosives require fireguards on watch on board.

GANGWAY/DECK WATCHMEN: Not compulsory, but recommended for larger overseas vessels.

OPENING/CLOSING HATCHES: Usually done by ship's crew.

CERTIFICATES: Vessels must have all usual International Certificates, no special certificates required.

CUSTOMS ALLOWANCES: Every crew member allowed one bottle wine or spirits, and 200 cigarettes out of bond for use in port. This allowance is for 10 days. After this period new tobacco allowance is granted, but no new spirit issue.

CARGO GEAR: No additional requirements.

IDENTIFICATION CARDS: Not required.

CONSULS: Danish, tel. 84040, French Vice-Consulate tel. 82 030, Swedish and Dutch Vice-Consulates tel. 82 090, Finnish Vice-Consulate tel. 81 000.

REPAIRS: Minor deck and engine repairs only.

REPATRIATION: Facilities for effecting crew changes and necessary repatriation by railway, continental ferry and by air.

AIRPORT: Distances from airport: Skien, regular service to Oslo 40 km. Torp, charter planes, 35 km. Fornebu, 130 km., world-wide service. Private airport open for small aircraft at Larvik.

TIME: Local time, GMT plus one hour. Permanent.

HOLIDAYS: New Years Day; Ash Thursday, Good Friday; Easter Monday; May 1st & 17th; Ascension Day; Whit Monday; Christmas Day; Boxing Day.

POLICE/AMBULANCE/FIRE: Tel. Police 82204, Ambulance 81234, Fire 81288.

TELEPHONES: Arrangements exist for placing telephones on board; charges 40 kr. for one week's hire plus cost of phone calls.

AUTHORITY: Port Manager, Havnefogden, Larvik Kommune.

LILLESAND: 58.15 N. 08.23 E.

DOCUMENTS:

Health Certificate.
Crew List.
Cargo List.
Manifest.
Passenger List.
Bill of Measurement.
Derat Certificate.

PILOTAGE: Ships arriving from South and West cable: Okso Pilot station, VHF Channel 16. Pilot to be taken on board at Okso Pilot station or if bad weather, inside Okso.

Ships arriving from East cable: Merdo pilot station, VHF Channel 16. Pilot to be taken on board at Torungen, or if bad weather, inside Merdo. Pilot boat is 45 ft. long and marked "Los".
ANCHORAGE: Tingsakerfjorden – depth 40 m.
MAX. SIZE: See "Berthing".
RADIO: Cable Agent giving ETA via Farsund or Tjome Radio.
TUGS: Normally join at Kristiansand. Tugs lines to be used.
BERTHING: The Kokkenesquay – Kokkeneskaia. Length 80 m. with free water at both ends. Depth 10 m. There is 1 crane with a maximum lifting capacity of 30 tons. Petroleum-coke and sand discharged by crane and grab about 60 t.p.h.

The Langquay – Langbrygga. Length 70 m. with free water at the deepest end, depth 10 m. reducing at inner to 2 m.

The Fosbaekquay – Fosbaekkaia. Messrs. H. Bjorum – Norfloat A/S quay. Length 50 m. with free water at both ends, depth 10 m.
STEVEDORES: Gangs to be ordered before 1600 hrs. for the following day and day before holidays 1320 hrs. During office hours 3 hours' notice required.
FRESH WATER: Delivery by hose from quay.
FUEL: None available.
GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: May be performed by ship's crew.
CUSTOMS ALLOWANCES: 200 cigarettes or 250 gram of tobacco, 0.75 litre of spirits and 1 litre of wine.
IDENTIFICATION CARDS: Not required.
CONSULS: Denmark, telephone 262.
REPAIRS: Some small repairs possible and electrical repairs.
DRY DOCKS: None.
AIRPORT: About 30 km. to airport.
HOLIDAYS: New Year's Eve no work after 1230 hrs.; New Year's Day no work; Maunday Thursday, Good Friday no work; Easter Eve no work after 1230 hrs.; Easter Sunday no work; Easter Monday, May 1st and 17th no work; Ascension Day no work; Whitsun Eve no work after 1230 hrs.; Whit Sunday 1st no work; Whit Sunday 2nd, Christmas Eve no work after 1230 hrs.; Christmas Day no work, and December 26th no work.
POLICE/AMBULANCE/FIRE: Police 170; Ambulance 18; Fire Brigade call the switchboard.

MAALOY: 61.55 N. 05.07 E. (See Plan Book)

DOCUMENTS:

- 2 Crew Lists.
- 2 Passenger Lists.
- 1 Health List.
- 3 Manifests.
- 1 Bill of Lading.
- Goods Lists including Stores, 3 if general cargo and 1 if goods or oil in bulk.

PILOTAGE: Harbour Pilot available, ordered from Harbour Office, tel. 51278. No coastal Pilots in harbour. Coastal Pilots ordered from Bergen through Maaloy Skipsekspedisjon, tel. 51303, and must be requested at least 24 hours before arrival.
ANCHORAGE: Good holding ground in about 17 fathoms of water 300 m. off-shore from middle of harbour.
MAX. SIZE: Entrance from South through main channel 33 ft. and entrance from North about 60 ft. The main quay 420 ft. long and from 24 to 36 ft. deep alongside. No cranes available at the dock.
RADIO: No radio or VHF stations. Nearest radio station, Aalesund Radio and Floro Radio.
TUGS: No tugs operate in Harbour.
CARGO HANDLING: Special berth equipped with a roll-on/roll-off berth in connection with quay 225 ft. long, from 18 to 36 ft. depth alongside.
STEVEDORES: From Maaloy Skipsekspedisjon.
MEDICAL: Nearest hospital Nordfijordeid Sykehus, 1 hour by car.
FRESH WATER: Available at main quay and delivered from a fresh-water line at quay.
FUEL: Bunkers available from Esso, Shell, B.P. and Mobil Oil. Three bunker barges available.
GANGWAY/DECK WATCHMEN: Available in the harbour.
OPENING/CLOSING HATCHES: Done by crew.
CUSTOMS ALLOWANCE: Tobacco: Wine/Spirits: 200 cigarettes or 100 gram tobacco. 1 bottle of spirit and 1 bottle of wine.
CONSULS: No consuls.
REPAIRS: Minor repairs only possible.
AIRPORT: Nearest airport Floro, 1 hour by boat, and Flesland Airport (Bergen) 8 hours night service by sea. Air route Bergen-Maaloy every day except holidays.
TIME: GMT plus 1 hour.
HOLIDAYS: 1st January; Easter Sunday; Easter Monday; Thursday and Friday before Easter; 1st May; 17th May; Whit Sunday and Whit Monday; Christmas Day and Boxing Day.
POLICE/AMBULANCE/FIRE: Police tel. 51-175; Fire and Ambulance contact telephone station.
TELEPHONES: Can be placed on board and cost same as on shore.
SERVICES: No tank cleaning services available. Compass adjusting.
SHORE LEAVE: No restrictions about shore leave.
AUTHORITY: Harbour Master.

MANDAL: 58.02 N. 07.29 E.

DOCUMENTS:

- Bill of Measurement.
- General Cargo List (two copies).
- Cargo and Provisions List (ship's stores).
- Derating Certificate.
- Maritime Declaration of Health.
- Tobacco list.

PILOTAGE: Pilot station on Oksoy lighthouse outside Kristiansand. Telephone 32834 via Kristiansand radio.
ANCHORAGE: Mannefjorden. Depth approx. 30 ft. Bankefjorden, shallow entrance with approx. depth 15 ft.
MAX. SIZE: Ship up to approx. 12,000 g.r.t. No tide problems. Oil carriers to installations outside main port area up to 20,000 tons.
HEALTH: Contact Agent for pratique.
RADIO: Farsund Radio or Kristiansand Radio.
TUGS: One small 200 h.p. tug available in harbour. Heavier tugs must be ordered from Kristiansand at 5 hours notice.
BERTHING: Mandal main harbour is Kleven, situated 1 km. East of Mandal town. There is also some kind of a harbour in Mandal River, running through town. River entrance is shallow, 14 ft. In South-easterly strong winds it can be impossible to go up the river. Kleven harbour is a good harbour in all weather conditions. There is 1 × 90 m. quay 30 ft. deep and 1 × 45 m. quay 17 ft. deep.
STEVEDORES: 6 hours notice to Agents to arrange gangs.
MEDICAL: No advance notice required. Hospital facilities available.
DENSITY: 1026.
FRESH WATER: Delivered by local firemen. Rate of delivery 20 t.p.h.
FUEL: At Oil installation inside Harbour limit.
GANGWAY/DECK WATCHMEN: Not required.
OPENING/CLOSING HATCHES: Normally carried out by crew.
CERTIFICATES: Certificate of Nationality.
CUSTOMS ALLOWANCE: Tobacco: 200 gr. Tobacco or 200 cigarettes. Wine and/or Spirits: 2 litre alcohol for ship's Master, .75 litre for crew.
IDENTIFICATION CARDS: Not needed.
CONSULS: Sweden 62521; Finland 61288; Denmark 61799.
REPAIRS: All types of deck and engine repairs can be carried out.
DRY DOCKS: None.
AIRPORT: Kristiansand Airport at Kjevik. Distance from Mandal 64 km. Airport served by regular airlines.
TIME: GMT plus 1 hour.
HOLIDAYS: The only holidays that one cannot arrange cargo work Christmas Eve (after 1400 hrs.), Christmas Day, Easter Day, 1st May, 17th May (Independence Day). The rest of the year cargo work can be carried out day and night.
POLICE/AMBULANCE/FIRE: Police 61211; Ambulance 61113; Fire 61112.
TELEPHONES: Telephones available at quay.
SERVICES: No services for tank cleaning. Compass adjusting and all kinds of electronic repairs.
SHORE LEAVE: No restrictions.
AUTHORITY: Mandals Havnevesen.

MO-I-RANA: 66.19 N. 14.08 E.

PORT LIMITS: The vessel is considered to be an "arrived vessel" when within the Haukneset port lighthouse – about 2 nautical miles from the port.
DOCUMENTS:

- 1 Cargo List.
- 1 Stores List.
- 1 Sealing Certificate.
- 1 Health Certificate.
- 2 Crew Lists.
- 2 Passenger Lists.

(All Forms obtainable from Customs by clearance on board).
PILOTAGE: Asvaer pilot station 66° 17′ N. – 12° 09′ E. (lighthouse). Order preferably through Agent or direct to station 24 hours before arrival. 2 boats: L/K "Asvaer" and L/K "Asvaer II" both painted white, 2 yellow masts and yellow funnel. "LOS" painted in black on both sides. Radio (frequency 2182) and VHF Channel 16. Pilots embark at Asvaer Lighthouse. Pilots advise alternative place or anchorage if necessary. Pilot compulsory unless vessel ballasting for loading at another port in Norway.
ANCHORAGE: In the fjord at Utskarpen Bay to be advised by sea Pilot. Anchorage in the inner harbour to be advised by the harbour Pilot.
HEALTH: See "Documents". No animals allowed on shore.
RADIO: From South; Rogaland Radio/LGQ, LGW, LGB. Within 24 hours off; Rorvik Radio/LGD. From North; Vadso/LGV or Hammerfest/LGI or Tromso/LGE or Bodoe Radios/LGP.
VHF: At harbour office call sign. "Mo Port Radio" Channel 16. At A/S Norsk Jernverks quay call sign. "Jernverks quay" Channel 16.
TUGS: Available and recommended for vessels above 13,000 d.w.t. 24 hours notice to be given. Ships' lines used.
BERTHING: Harbour Pilot recommended but not compulsory for small vessels. Details given through Pilot/Harbour Pilot.

Koksverket Pier	37 ft. depth alongside
Town Pier	25 ft. depth alongside
Jernverket Pier (Steel)	26 ft. depth alongside
Andfiskaa Pier	23 ft. depth alongside

CARGO-HANDLING FACILITIES: The harbour has the following facilities for handling cargoes, Norsk Koksverk A/S pier depth 36 ft.; length 427 ft. and 295 ft., North and South side handling following cargoes: ore, coal, coke, tar, bensol, ammonia and oil.

A/S Norsk Jernverk Quay: handling ore, coke, steel products and general cargoes. Length of quay, 823 ft.; depth 25 ft. A/S Bleivassli Gruber Pier, length 115 ft.; depth 23 ft. Has equipment and elevator for handling pyrites – fast loading. The Town Quay (Harbour Board Quay), length 823 ft. and depth 18 to 26 ft., handling general cargoes of all kind, with up to 15-ton lifts.

STEVEDORES: Ordered by Agents preferably in office hours 0900–1600 hrs. Exact time for commencement of work to be arranged with Agent. Vessels to pay for waiting hours for workers if delay not reported. If such report after office hours, vessel to pay for 2 hours.

MEDICAL: If in need of doctor/dentist preferably inform Agent from sea if vessel stays only 1 day.

FRESH WATER: Available at all piers from shore installations.

FUEL: All types available.

GANGWAY/DECK WATCHMAN: Available but not compulsory.

OPENING/CLOSING HATCHES: Crew allowed to open/close.

CUSTOMS ALLOWANCES: Per 10 days in Norway per crew member – 200 cigarettes or 200 gr. tobacco and 2 packages cig. paper, and 1 bottle spirits.

CARGO GEAR: Winchmen from shore required acc. to local tariffs.

REPAIRS: Small damages can be repaired.

AIRPORT: 12 km. to local airport "Rana Airport" connection with Bodoe (North) twice per day and Trondheim (South) twice per day.

TIME: GMT plus hour permanent.

HOLIDAYS: New Year's Day; Thursday before Good Friday; Good Friday; Easter Monday; Labour Day; National Day (17th May); Ascension Day; Whit Monday; Christmas Day and Second Christmas Day. No work can be arranged on any of these days.

TELEPHONES: Accidents/hospital: 51233; Ambulance: 51510; Fire: 51222 and Police: 51122.

SHORE LEAVE: No restrictions.

AUTHORITY: Port Manager, Mo Havnevesen.

MOLDE: 62.44 N. 07.10 E.

DOCUMENTS:

Health Certificate.
Crew Lists.
Passenger List.
Dangerous Cargo List.
Ship's Register.

PILOTAGE: Telegraphic address "Alesund Radio". Address of pilot station "Rundo".

ANCHORAGE: A well-protected harbour. Depth from 15 to 20 fathoms. Tide rises about 6 ft.

MAX. SIZE: Passenger vessels of 25,000 g.r.t. berth at Storkaia.

RADIO: Alesund Radio.

VHF: Molde Harbour Radio, Channel 16 and 12.

TUGS: None. Tugs called from Alesund.

BERTHING: Depths alongside quay 25 to 32 ft. LW.

A new port, 2 km. from the town. Two quays with roll-on/roll-off ramps. Depth alongside No. 1 – 6 m. and No. 2 – 12 m.

CRANES: 150 ton crane and 20 ton mobile crane.

STEVEDORES: Available, ordered by Agents.

MEDICAL: Hospital available.

FRESH WATER: By shore installation.

DENSITY: 1025.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: By crew or stevedores.

IDENTIFICATION CARDS: Not required.

REPAIRS: Most repairs possible.

SURVEYORS: Norske Veritas.

POLICE/AMBULANCE/FIRE: Police 51111; Ambulance 52011; Fire 51100.

AIRPORT: Aaro Airport, 4 km. from town.

SHORE LEAVE: Possible, no restrictions.

AUTHORITY: Molde Havnevesen, Molde.

MONGSTAD: 60.49 N. 05.02 E.

OPERATORS: Oil refinery operated by Rafinor A/S & Co., Mongstad, which company is owned by Norsk Hydro A/S, Norsk Olje A/S and Den Norske Stats Oljeselskap A/S (Statoil).

DOCUMENTS:

3 copies Crew List.
1 copy Crew Effects Declaration.
2 copies Ships Stores Declaration.
1 copy Health Declaration.
1 Passenger List (if any).

IMCO standard forms in most cases required.

On ship's arrival the following documents must be available: Letter of Registry, Outward Clearance from last port of call, Deratting or Deratting Exemption Certificate, and Certificates of Insurance for Civil Liability for Oil Pollution Damage. Non-member registered ships of the International Convention on Civil Liability for Oil Pollution Damage, 1969, must after 30th June, 1976, carry a Certificate issued by Maritime Directorate, PO Box 8123, OSLO-Dep., Oslo, Norway. Before this date Certificates issued by Denmark, Sweden and U.K. covering non-Convention registered ships, will be recognised.

PILOTAGE: Compulsory. Vessels will be berthed/unberthed by pilots from Fedje Pilot station (Position 60° 51′ N., 04° 39′ E.). Contact pilots on VHF Channel 16, 2/3 hours notice required.

ANCHORAGE: North-west of refinery area. However, not well sheltered and holding ground not good. No anchorage for VLCC's.

MAX. SIZE: Draft limitation at Crude Jetty 72 ft.

HEALTH: International procedure followed to obtain pratique. In case of suspected disease or fever on board, the port authorities to be informed in advance.

RADIO: Cable Agent ETA, cash, bunkers, personnel, bonded stores, or other special requirement. For the refinery's guidance also cable flange dimensions on ships' headers, cargo quantities acceptable and order of loading, quantity of clean ballast and estimated time for discharge, size of cargo to be discharged and max. pumping rates, max. acceptable loading rates, quantity of tank washings and estimated time for discharge.

TUGS: Two tugs of 2,650 b.h.p., each – bollard pull 36.5 tons situated at the refinery. Additional tugs available from Bergen.

BERTHING:

Berth No. 1 (for crude) – draft limitation 72 ft., length 124 m. – min. depth 125 ft.

Berth No. 2 (products) – draft limitation 38 ft., length 69 m. – min. depth 59 ft.

Berth No. 3 (products/coasters) draft limitation 22 ft., length 36.5 m. – min. depth 25 ft.

Berth No. 4 (petrol coke) draft limitation 21 ft., length 50 m. – min. depth 24 ft.

CARGO HANDLING FACILITIES:

Berth No. 1 – 4 × 16 in. plus 2 × 16 in./10 in. Woodfield autoflowbooms.

Berth No. 2 – 4 × 10 in. plus 2 × 8 in. Autoflowbooms.

Berth No. 3 – 2 × 8 in. plus 2 × 6 in. Autoflowbooms.

BALLAST: Deballasting facilities available at jetty Nos. 2 and 3. Tankage capacity 27,000 cu. m. All ballast to be discharged ashore.

MEDICAL: Medical attention available. Hospital facilities at Bergen.

DENSITY: Salt water.

FRESH WATER: Available from the jetties. Cost per ton Nkr. 2.50.

FUEL: All grades available.

FIRE PRECAUTIONS: Special safety regulation forms given when berthed.

CONSULS: Consuls available at Bergen from the following countries: Austria; Belgium, Brazil, Denmark, Finland, France, Great Britain, Greece, Iceland, Italy, The Netherlands, Panama, Peru, Portugal, Spain, Sweden, Switzerland, Turkey, Uruguay, West Germany.

REPAIRS: Repair shop facilities available. Repair work must not be commenced without the agreement of the Port Captain.

SURVEYORS: The following Classification Societies represented by Surveyor at Bergen: American Bureau of Shipping, Bureau Veritas, Det norske Veritas, Germanisher Lloyd, and Lloyd's Register of Shipping.

GANGWAY/DECK WATCHMEN: Available.

CUSTOMS ALLOWANCES: 200 cigarettes or 200 grammes tobacco and 1 bottle spirit or 2 bottles of wine, each man.

REPATRIATION: All facilities. Bus or Taxi transport to international airport.

AIRPORT: Flesland Airport, approx. 86 km. (54 miles) distance from Mongstad. Distance Bergen to Mongstad approx. 45 km.

TIME: Central European time i.e. GMT plus one hour.

POLICE/AMBULANCE/FIRE: Police telephone Knarvik 350504 and 350505. Ambulance and Fire fighting brigade available at the refinery.

TELEPHONES: No telephones on board. Long distance calls to be arranged via Agent. Local calls from Gatehouse.

SHORE LEAVE: Allowed.

IDENTIFICATION CARDS: Shore passes delivered on board on arrival.

PORT REGULATIONS: *Moorings:* Mixed moorings in the same direction are not allowed. Wire ropes shall have nylon "tails" not longer than 12 m. Nylon "tails" are available for purchase. Due to occasionally heavy swell in the fiord, particular attention is paid to the moorings.

AUTHORITY: Rafinor A/S & Co.

AGENT: Berle & Petersen A/S, N-5153 Fonnes (Norway), Telex: 42261 mogfs n, Tel.: Fonnes 186 (later this year to be changed to (47 5) 368523).

Head Office: Berle & Petersen A/S, P.O.B. 895, N-5001 Bergen. Telex: 42650 bepet n, Tel.: (47 5) 232010.

MOSJOEN: 65.51 N. 13.11 E. (See Plan Book)

DOCUMENTS:

Health Certificate.
Crew List.
Passenger List.
Ship's Register.
Cargo List.
Bonded Store List.

PILOTAGE: Pilot station at Asvaer, location 66° 15′ 9″ N. 12° 18′ 03″ E. Telegraphic address: Pilot Station, Asvaer. VHF Channel 16. Telegraph ETA 24 hours prior to arrival. Piloting around clock.

ANCHORAGES: Hellesvik. Location 66° 01′ 30″ N. 12° 54′ 20″ E.

RESTRICTIONS: No restrictions night entry. If draft above 33 ft. enter on high tide and commence discharging immediately.
HEALTH: Free pratique given automatically when "Q" flag not to be flown.
MEDICAL: Master to advise prior to arrival if medical attention required. Hospital facilities available.
RADIO: Rorvik Radio LGD.
TUGS: Stationed at Sandnessjoen. Have to be ordered through Agents 24 hours prior to arrival. Normally used by vessels above 20,000 d.w.t.
BERTHING: Draft above 33 ft. berthed only on high tide and commence discharging immediately. No restrictions on length and breadth.

Crane for bulk cargo (alumina), capacity 300 t.p.h. Mosjoen Aluminiumverk, private berth. Maximum outreach from quay – 15 m.

No other special facilities (roll-on/roll-off facilities may be constructed).
STEVEDORES: Ordered through Agents. No ETA to stevedores necessary.
DENSITY: Brackish in port.
FRESH WATER: Supplied from installations at berth.
FUEL: Gas oil, delivered by lorries.
GANGWAY/DECK WATCHMEN: Available, but not compulsory.
OPENING/CLOSING HATCHES: Performed by vessel's crew.
CUSTOMS ALLOWANCE: 1 bottle spirits, 200 cigarettes, 200 gr. tobacco.
IDENTIFICATION CARDS: Not required.
CONSULS: None.
REPAIRS: Minor repairs possible.
TIME: GMT plus 1 hour. No alterations during year.
HOLIDAYS: New Year's Day; Good Friday; Maunday Thursday; Easter Monday; Workers' Day (1st May); 17th May; Ascension Day; Whit Monday; Christmas Day; Boxing Day.
POLICE/AMBULANCE/FIRE: Fire 70222; First Aid 70800; Police 71611.
AUTHORITY: Mosjoen Havnevesen.

NAMSOS: 64.28 N. 11.30 E.

DOCUMENTS:
Crew list.
2 Passenger lists.
2 Health Certificates.
Manifests.
Ship's papers.
PILOTAGE: Sea pilot stationed at Namsos. Contact through Rorvik Radio. Pilot boat: white painted 46 ft. long. Usual signals. Pilot boards at 64° 38′ N. 10° 51′ E. Pilot can be ordered by ship's Agent.
ANCHORAGE: Good anchorage inside harbour.
MAX. SIZE: Vessels up to 15,000 d.w.t. have entered harbour. 3 small oil berths with depth 18 ft. L.W.
HEALTH: Normal Norwegian regulations.
RADIO: Rorvik Radio. No radar or VHF service in the harbour.
TUGS: No tugs in Namsos. 1 tug stationed at Bangsund and can be hired.
STEVEDORES: Notify day before arrival to arrange gangs.
TANKERS: 3 tanker berths 18 ft. alongside L.W.
DENSITY: Average density 1020 in Spring, and in Summer 1015.
FRESH WATER: Available by hose. Capacity 10-15 t.p.h.
FUEL: All grades available.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Stevedores operate hatches.
CERTIFICATES: Usual international certificates.
IDENTIFICATION CARDS: Not needed.
CONSULS: None.
REPAIRS: Small repairs available.
REPATRIATION: Organized by seamen's office.
AIRPORT: 4 km. from town. Regular service twice a day South and North.
TIME: European standard time. GMT plus 1 hour.
POLICE/AMBULANCE/FIRE: Police 72151; Ambulance 72500; Fire 72000.
TELEPHONES: Can be placed on board.
SHORE LEAVE: Crew allowed ashore.
DELAYS: None expected.
AUTHORITY: Namsos Havnevesen Boks.

NARVIK: 68.26 N. 17.25 E. (See Plan Book)

DOCUMENTS:
Health Declaration in Norwegian form (if not available another form is possible).
6 Crew Lists.
1 Provision List.
1 Private Customs List.
Passenger List.
PILOTAGE: Tranoy Pilot station. Position 68° 11′ N. 15° 34′ E. Pilots request 24 hours notice. Cable address: Tranoy Pilot station. Before arrival pilot station Pilots should be called on VHF Channel 16.

Distance from Tranoy to Narvik is 46 miles. The Harbour Pilot will board and assist during berthing.
ANCHORAGE: Narvik Harbour. Pilot will advise anchorage.
RADIO: Cable Agents giving ETA, draft and cash required. Radio station: Rogaland Radio/LGB but other stations can be used.
RESTRICTIONS: No restrictions on night entry.
TUGS: Must be employed for tankers. 3 tugs available, capable of assisting vessels up to 250,000 d.w.t.
HEALTH: Free pratique, otherwise see "Documents".
BERTHING: Max. depth alongside 13.5 m. at LWOST, max. draft on sailing 13 m. A deeper sailing draft may be permitted if tide and weather conditions are favourable but the Master will be liable for any damage caused by a vessel with draft over 13 m.

2 boom-type shiploaders are available, on each side of the pier. If 2 vessels are loading simultaneously, 1 on each side of the pier, then only 1 loader may be used by each vessel. The designed capacity of each loader is 4,500 t.p.h. but average capacity of each loader is 2,000/3,000 t.p.h. depending on quality and kind of ore to be loaded.

Maximum outreach from fender line is 15 m. The height from the water to the top of the vessel's coaming must not exceed 13 m. (Pier 3) and 11 m. (Pier 4).

The length of the ore pier is 250 m. on the outside (No. 3) and 220 m. on the inside (No. 4).

The shiploaders are able to travel over a distance of 145 m. so larger vessels (65,000 tons d.w.t.) may have to shift during loading operations. The length of the vessel from the bow (or bulbous bow) to the aftermost loading point must not exceed 202 m.

The limit on beam is 37-38 m. for ore/bulk carriers and 39-40 m. for OBO vessels (approx.)

A stowage plan is to be handed to the Agent and foreman on arrival, stating the quantity in metric tons and loading rotation of the hatches, also the estimated draft on sailing.

Weighing: Electronic conveyor weighing with an average accuracy better than ±0.15%.

New Ore Pier No. 5:

The quay is 208 m. long and has a water depth of 27.5 m. which allows tonnages of about 350,000–400,000 d.w.t. In the first stage only 1 ship's loader will be built but room will be left for an additional one. The loading capacity is 11,000 tons of ore or 7,500 tons of pellets per hour.

Vessels of up to 150,000 tons will be loaded without shifting the vessel. Larger vessels will have to be shifted alongside during loading.

Fagerneskaien: Situated in the Southern part of the harbour, may be used by iron ore vessels during repairs, etc. Length of quay 230 m. Depth alongside at LW 15 m.
STEVEDORES: Ordered by Agent. Not necessary to contact stevedores.

Working hours: Ordinary working hours 24 running hours, except Saturday 2200 to Sunday 0600 hrs.

Loading does not take place on the following holidays:

December 24th	1300 hrs.	– December 26th	2200 hrs.
December 31st	1300 hrs.	– January 1st	2200 hrs.
Maundy Thursday	1400 hrs.	– Easter Monday	2200 hrs.
Whitsun Eve	1400 hrs.	– Whit-Monday	2200 hrs.
April 30th	2200 hrs.	– May 1st	2200 hrs.
May 16th	2200 hrs.	– May 17th	2200 hrs.

DENSITY: 1020.
FRESH WATER: Ore berth has supply of fresh water. Otherwise delivery by tugs.
FUEL: Only clean oil (diesel) and lubricating oil available.
GANGWAY/DECK WATCHMEN: Available but not compulsory.
OPENING/CLOSING HATCHES: May be handled by ship's crew.
CUSTOMS ALLOWANCES: 200 cigarettes or 250 grams tobacco and 0.75 litre spirit or 2 bottles of wine. Must be declared on Customs list together with radios, tape recorders, binoculars, etc.
IDENTIFICATION CARDS: Not required.
CONSULS: Swedish, Danish, British, West German.
REPAIRS: Only small deck and engine repairs possible.
DRY DOCKS: None.
AIRPORT: Bardujoss 3 hours bus trip from the port. South-bound planes twice a day.
TIME: GMT plus 1 hour.
HOLIDAYS: New Year's Day; May 1st; May 17th; Easter; Christmas Day; December 26th.
POLICE/AMBULANCE/FIRE: Police 41060; Hospital 44044; immediate help 4300 (only at night time); Ambulance 43600; Fire 41122.
LAUNCHES: The Agent will supply a time table and tickets on arrival. If a launch is required, the "B" flag or red light should be displayed from the signal mast.
TELEPHONE: Local and long-distance calls can be ordered via Harstad Radio on VHF (Channel 16).

Vessels alongside the piers may hire a telephone but continuous telephone watch should then be kept on board.
SHORE LEAVE: Allowed.
AUTHORITY: Harbour Master, Narvik Havnevesen.

OSLO: 59.54 N. 10.43 E. (See Plan Book)

DOCUMENTS:
Maritime Declaration of Health.
Sealing Certificate.
2 Crew Lists.
2 Passenger Lists.
2 Lists Crew Personal Effects.
Provisions List.
3 Cargo Manifests.
Certificate of Tonnage.
Dangerous Cargo List.

PILOTAGE: Compulsory. Pilot boards at Faerder Lighthouse, 50 miles from docks. Give 6 hours notice by R/T 2182 kHz or VHF Channel 16 to "Faerder Pilot".

ANCHORAGE: Good sheltered anchorage in Western Harbour Basin, depths up to 20 m.

RESTRICTIONS: Vessels may enter at any time. No tide or current.

MAX. SIZE: Vessels up to 34 ft. draft may berth at Filipstad Quay and Sjursoya Quay.

Tankers: Up to 36 ft. draft at Oslo, or 38 ft. draft at Fagerstrand.

HEALTH: International procedure followed to obtain pratique. In case of suspected disease or fever on board, inform the Harbour Master's office in advance. When arriving from a Norwegian port, pratique is automatic.

RADIO: Communicate through Oslo Radio, call sign LGO. Harbour Master's Office equipped with VHF, Channel 16.

TUGS: Sufficient tugs available for all requirements.

BERTHING: Instructions given from Harbour Master. Masters of ships are requested to send their ETA to the Harbour Master's Office through Oslo Havne radio, VHF Channel 16.

Filipstad Quay: up to 11 m. depth alongside.
Sjursoya Quays: up to 11 m. depth alongside.
Vippetangen: up to 10 m. depth at Pier No. 1.
Pipervika: up to 8 m. depth at Akershus Pier.
Bjorvika: up to 7.30 m. depth at Lang Quay.
Bispevika: up to 11 m. depth at Sorenga Pier.
Gronlia: up to 8.50 m. depth alongside.
Kongshavn Quays: up to 6 m. depth alongside.
Bekkelaget: up to 10.80 m. depth alongside.

BULK CARGO FACILITIES: Container traffic handled at Filipstad, Bekkelaget and Sjursoya North.

Sorenga Pier equipped for palletised cargo handling and containers, ro/ro.

8 new berths for roll-on/roll-off traffic. Cranes for ISO-container and other container handling equipment, quay cranes and mobile cranes of 30 tons capacity.

Sjursoya North: cement, phosphate, grains, molasses and containers.
Sjursoya South: gasoline and oil, propane and gas.
Bekkelaget North: molasses, general cargo and oil.
Sorenga: coal, coke, sulphur, china clay and leca.
Pier 3: grains and sugar.
Kongshavn: building material, coal and phosphate.

STEVEDORES: Arranged by Agents. Working hours 0700-1600 hrs., Saturdays overtime is voluntary.

TANKERS: Also see "Slagen".

Oslo: Oil pier at Sjursoya, depth alongside 12 m. A tug required to stand by during discharge.

Fagerstrand: Terminal operated by Norske Braendselolje A/S situated in Oslo fjord, 12 miles S. of Oslo. 1 berth for tankers up to 30 ft. draft.

1 berth for tankers up to 38 ft. draft.

MEDICAL: All facilities available. Masters to advise by radio prior to arrival if medical attendance required on board.

DENSITY: Salt water, 1025.

FRESH WATER Available by pipeline from all quays.

FUEL: All grades available, ex-wharf at many quays. Can be delivered by barge.

FIRE PRECAUTIONS: 2 boats fully equipped with fire-fighting equipment.

CUSTOMS ALLOWANCES: 200 cigarettes allowed weekly, 1 bottle spirit weekly, for each man.

CARGO GEAR: International Safety Regulations to be observed.

IDENTIFICATION CARDS: Not required.

CONSULS: Following countries are represented at Oslo:

Austria
Bangladesh
Benin
Bolivia
Canada
Chile
Colombia
Costa Rica
Cyprus
Denmark
Dominican Republic
Ecuador
Ethiopia
Finland
France
Great Britain
Greece
Guatemala
Haiti
Honduras
Indonesia
Ireland
Ivory Coast
Jordan
Korea
Lebanon
Lesotho
Liberia
Lichenstein
Luxembourg
Monaco
Morocco
Nicaragua
Pakistan
Panama
Paraguay
Peru
Philippines
Portugal
Salvador
Soviet Union
South Africa
Spain
Sweden
Thailand
Tunisia
Uruguay
Venezuela

REPAIRS: All types of hull and machinery repairs can be effected.

DRY DOCKS: 1 ship repair yard managing a total of 3 floating docks with lifting capacity of up to 19,000 tons, max. length 665 ft.

1 graving dock; length 564 ft. depth 23 ft.

REPATRIATION: All facilities available without restrictions.

AIRPORT: Fornebu Airport situated 8 km. from city centre. Regular services to Europe and U.S.A.

TIME: Local time, GMT plus 1 hour all year round.

HOLIDAYS: January 1st; Good Thursday; Good Friday; Easter Monday; May 1st; May 17th; Whit Monday; Christmas Day; Boxing Day.

No cargo work normally on Saturday, Sunday and Holidays.

POLICE/FIRE/AMBULANCE: Police, tel.: 33.12.90; Fire, tel.: 42.99.00; Ambulance, tel.: 20.10.90.

TELEPHONES: Can be placed on board vessels at most quays.

SHORE LEAVE: No restrictions.

DEVELOPMENTS: Extensions of the land areas in the port by approx. 200,000 sq. m. Quay extensions of 1,000 m. Storage halls in hills, 100,000 sq. m. or more, sheds and service buildings.

AUTHORITY: Port Director, Oslo Havnevesen.

RISOR: 58.43 N. 09.14 E.

DOCUMENTS:

3 Crew Lists.
3 Customs Lists.
Ship's Register.
Bill of Lading.

PILOTAGE: VHF Channel 16. 45 ft. long boat "Los" on both sides. Will be instructed by Pilot over VHF.

ANCHORAGE: In 15 fathoms depth.

MAX. SIZE: 10,000 d.w.t., draft 28 ft.

RADIO: Farsund and Tjomoy Radio. VHF Channel 16. No radar.

TUGS: No tugs for berthing.

STEVEDORES: Available 24 hours notice of ETA required.

FRESH WATER: Available by pipe-line at berth.

FUEL: Not available.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: May be performed by ship's crew.

CUSTOMS ALLOWANCE: Tobacco: Wine/Spirits: 200 cigarettes per crew member for 10 days. 3 bottles spirit for ship's Master only for 10 days.

IDENTIFICATION CARDS: Not needed.

CONSULS: French and Swedish.

REPAIRS: No shipyard.

AIRPORT: 10 miles; every day service.

TIME: GMT plus 1 hour.

HOLIDAYS: Work can be arranged by 100% overtime.

TELEPHONES: Can be arranged on board.

AUTHORITY: Harbour Master, Risor Havnekontor.

SARPSBORG: 59.17 N. 11.07 E.

DOCUMENTS:

2 Crew Lists.
2 Passenger Lists.
1 Health Certificate.
3 Manifests.
1 Bill/Lading.
2 Tobacco/spirit Lists.

PILOTAGE: Pilot ordered by Faerder Losstasjon or Herfol Losstasjon via Tjome Radio. Harbour office can be contacted by VHF. Pilotage compulsory for all vessels of 100 g.r.t. and over.

ANCHORAGE: Between Struten Light and Stromtangen Light.

MAX. SIZE: 24 ft. draft.

HEALTH: No particular action necessary, but Agent to be informed.

RADIO: Tjome Radio.

VHF: Harbour Master's office, Channels 16 and 12. Day and night service.

TUGS: Small harbour tug available.

BERTHING: A roll-on/roll-off berth has been built to handle vessels of up to 6,000 tons gross. Depth alongside 28 ft. Vessels will moor alongside the old Alvim pier enabling them to work through the side doors and stern doors.

STEVEDORES: Ordered through Agent.

MEDICAL: If medical attention necessary Agent must be informed in advance.

FRESH WATER: Only at Alvim Kai, average 15 t.p.h.

FUEL: Fuel obtained only with tank cars.

GANGWAY/DECK WATCHMEN: No gangways from shore. Watchman can be obtained.

OPENING/CLOSING HATCHES: Carried out by crew.

CUSTOMS ALLOWANCES: 100 gr. tobacco or 200 cigarettes per crew member. Wine 1 litre per member or 1 bottle of spirit.

IDENTIFICATION CARDS: Have to be used for Melloes Quai only.

CONSULS: Denmark, Finland, Iceland, Sweden, Greece, all have vice-consulates.

REPAIRS: Deck and engine repairs possible.

DRY DOCKS: One for 3,100 tons d.w.t.

REPATRIATION: No facilities.

AIRPORT: Fornebu Airport 110 km. from Sarpsborg. Served by regular airlines.

TIME: GMT plus 1 hour.

HOLIDAYS: 1st January; 1st May; 17th May; 25th/26th December. No work on these days.

POLICE/AMBULANCE/FIRE: Police 52000; Ambulance 52040; Fire 51234.

TELEPHONES: No arrangements exist for placing telephones on board.

SHORE LEAVE: No restriction.

AUTHORITY: Harbour Master, Sarpsborg Havnevesen.

SAUDA: 59.40 N. 06.22 E. (See Plan Book)

DOCUMENTS:
Health Certificate.
Crew List.
Derating Certificate.
Ship's Register.

PILOTAGE: Skudefjorden Pilot Station, tel. 047-58337 (or Pilot boat "Skudefjord" on VHF). Kvitsoy, position 59° 05' N., 05° 20' E.

ANCHORAGES: Safe anchorages everywhere in Sauda Harbour area.

RESTRICTIONS: No restrictions night entry – but sea Pilots usually refuse to take in vessels over 10,000 d.w.t. between 1800 hrs. and 0600 hrs. during Winter time, November-January.

MAX. SIZE: Draft 30 ft. – but vessels over 30 ft. are allowed to get alongside at owner's own risk. Length no restriction. Breadth, 75 ft.

RADIO: Cable Agents giving ETA, draft and cash requirement via Rogaland Radio. No VHF station at Sauda.

TUGS: Not necessary.

BERTHING: May take place at any time provided quay available.
(1) Import Quay: 250 m. long. 2 unloading towers with a capacity of about 3,500 tons ore per day.
(2) Export Quay: 115 m. long. 2 loading cranes with a capacity of about 1,600 tons ferro alloys per day.

STEVEDORES: Ordered by Agents. Normal working hours 0700–2300 hrs. and on Saturday 0700–1200 hrs.

MEDICAL: Masters to advise by radio prior arrival if medical attendance required aboard. Modern hospital.

DENSITY: Brackish in port area, average salinity 2.39%.

FRESH WATER: Good fresh water available, delivery irrespective of quantity.

FUEL: No fuel available at Sauda, must be ordered from Stavanger.

GANGWAY/DECK WATCHMEN: Available, but not compulsory.

OPENING/CLOSING HATCHES: Crew allowed open and close.

CERTIFICATES: Registered Tonnage Certificate required.

CUSTOMS ALLOWANCES: Tobacco, 200 cigarettes per crew member (Captain double up). Wine/Spirit, 3 bottles for Captain and 1 bottle either spirit or wine for each crew member.

CARGO GEAR: No additional requirement.

IDENTIFICATION CARDS: Admittance cards to be filled in to pass the gate.

CONSULS: No consulates at Sauda. Nearest in Stavanger.

REPAIRS: Minor repairs possible.

DRY DOCKS: No dry dock at Sauda. Nearest in Stavanger and Haugesund.

REPATRIATION: Any repatriation may take place.

AIRPORT: Stavanger and Haugesund.

TIME: GMT. plus 1 hour.

HOLIDAYS: New Year's Day; Maundy Thursday; Good Friday; Easter Monday; Labour Day (May 1st); National Day (May 17th); Ascension Day; Whit Monday; Christmas Day; Second Christmas Day (December 26th) (no work on these days).

POLICE/AMBULANCE/FIRE: Police 52300; Ambulance 52811; Fire 52200.

TELEPHONE: If wanted, telephone may be placed on board (apparatus No. 52163) free of charge.

REGULATIONS: Strictly prohibited throw wastes or garbage into sea within port area.

DELAYS: All vessels loaded/unloaded in turn, very seldom any congestion in port.

AUTHORITY: Sauda Havnestyre.

AGENT: Electric Furnace Products Co. Ltd., 4201 Sauda, Norway. Tel. 52561 or 52570. Telegram "Saudecia". Telex 33166 EFPCO N.

SKIEN (incl. Menstad): 59.12 N. 09.38 E.

DOCUMENTS: Clearance documents, forms obtainable from Customs Officers on arrival.
Deratisation Certificate.
Bill of Lading.
Manifests.
2 Crew lists.
Ship's Register.

PILOTAGE: Ship's Agent gives ETA pilot station 24 hours before arrival and direct to Pilots 2 hours before arrival. Telegraphic address: Pilot station, Langesund. VHF Channel 16 to be used when contacting Pilots. Pilot boards at Steingrunnen light buoy, Langesund bay, 58.55 N. 09.44 E. Flag, sound and morse signal "G". Pilotage compulsory for all foreign vessels but dispensation can be obtained for smaller Scandinavian vessels.

BRIDGES: On passage from sea, vessels pass Porsgrunn where there is a lifting bridge with breadth 30 m. Signals for passing bridge inward: 1 long and 2 short sound signals. Outward signals, 1 long and 1 short sound. There is also a bridge at Brevik: Max. height 45 m.

TUGS: One tug available.

BERTHING: Between Porsgrunn and Skien, Norsk Hydro have loading place, Menstad, for vessels up to 425 ft. length and max. draft 18 ft. 06 in.Between Menstad and Skien Grain Silo for vessels with max. length 425 ft. and max. draft 18 ft. 06 in. At Skien vessel's length must not exceed 335 ft. and max. draft 18 ft. 06 in.

DENSITY: At Menstad and Skien practically fresh water.

STEVEDORES: Ordered by Agents.

FRESH WATER: Obtainable.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

RADIO: Tjome Radio/LGT or Farsund Radio/LGZ.

OPENING/CLOSING HATCHES: By crew or stevedores.

CUSTOMS ALLOWANCES: 400 cigarettes and 4 bottles spirit for the Master. 200 cigarettes and half a bottle spirit for each crew member.

CONSULS: Belgium, Holland, Sweden, Germany, Finland.

REPAIRS: All repairs possible. Dry dock: Lifting capacity: 2,000 tons. Radar/radio services can be arranged through Agents.

MEDICAL: All medical assistance to be arranged via Agents.

TIME: GMT plus 1 hour. Permanent.

HOLIDAYS: New Year's Day; Maundy Thursday; Good Friday; Easter Eve (half day); Easter Monday; Labour Day (1st May); Ascension Day; National Holiday (17th May); Whit Monday; Christmas Eve (half day); Christmas Day; (26th December), New Year's Eve (half day).

REPATRIATION: Facilities exist for effecting crew changes and repatriation.

RESTRICTIONS: No restrictions on night entry for vessels of above mentioned sizes.

AIRPORT: International at Oslo and Skien airport.

AUTHORITY: Skien Havnevesen.

SLAGEN: 59.20 N. 10.31 E. (See Plan Book)

Oil refinery pier operated by A/S Norske Esso, Norge.

DOCUMENTS:
Four Crew Lists.
Manifest of Crew Personal Effects.
Stores List.
Cargo Papers.
Bill of Health.
Ship's Register.

PILOTAGE: Compulsory for all foreign vessels. Pilot embarks from white painted cutter with the name "LOS" on the side at a position 3 miles N.N.E. of Ferder lighthouse. Call Ferder Pilot station at least 2 hours in advance via VHF Channel 16, working Channel 13, or via Tjome Radio on medium wave. Due to deep water there are no convenient anchorage available in vicinity of the Pilot station.

ANCHORAGE: N.N.W. of pier head. Particulars regarding anchorage will be given by Pilot.

MAX. SIZE: Tankers up to 350 m. length and 66 ft. draft can be berthed.

HEALTH: Clearance is effected on arrival. International procedure followed to obtain pratique. In case suspected disease or fever on board inform port authorities in advance.

RADIO: 72 hours prior to arrival at Pilot station, radio Agent ETA, cash, bunkers, personnel, bonded stores, or other special requirements. ETA should be repeated 48, 24 and 12 hours prior arrival Pilot station. All radio messages should be transmitted via Rogaland Radio, and when within closer range via Tjome Radio. When Pilot has embarked, contact should be established with Slagen Harbour Office via VHF Channel 16 or 14 for exchange of information prior to berthing, such as berth availability, current, wind, draft, ballast to be discharged, etc.

TUGS: Are available up to 4,000 i.h.p. Tankers over 20,000 d.w.t. required to have tug standing by throughout discharging operations. The charge for standby tug is to owner's account.

BERTHING: The East side of the pier (crude side) is used for loading and discharging. The West side (product side) is used for loading products only. Berth No. 1. Shore based gangway for use on VLCC's.
Berth No. 1 and crude berth – max. length 350 m., max. draft 66 ft.
Berth No. 2 max. length 192 m., max. draft 34 ft.
Berth No. 3 for coasters and barges.

HOSES: Crude oil berth: Four 12 in. lines, max. pressure 200 psig.

Berth No. 1:	One	10 in.lines for		dirty oils	
	Two	10 in.	,, ,,	clean products	
	One	8 in.	,, ,,	fuel (bunker)	
	One	4 in.	,, ,,	LPG	
	One	3 in.	,, ,,	,,	
Berth No. 2:	One	12 in.line for		clean products	
	Two	8 in.	,, ,,	,,	,,
	One	10 in.line for		dirty products	
	One	6 in	,, ,,	,,	,,

BALLAST: Shore ballast capacity 100,000 bbls. All ballast to be discharged ashore.

POLLUTION: A submersible oil boom has been installed enclosing the oil pier. Normally, the boom rests on the sea-bed, but when needed it will be raised to the surface using compressed air.

The oil boom and its system of anchorage will be damaged by vessels' anchors. In order to ensure that the oil boom is operable at all times, and to avoid expensive repairs, which will be charged to the ship responsible for the damage, great care should be taken in connection with manoeuvres along the Slagen pier, which will require the use of anchors.

The drawing of the pier shows the position of the oil boom and the anchorage system. Except for emergency situations, anchors should not be used within the shaded area.

All manoeuvres to and from berths should be discussed with the Harbour Office (Slagen Harbour Radio, Channel 14). The Harbour Office will give you information regarding current strength and setting.

Approach to Berth 2, and Berth 3 if Berth 2 is not occupied, is facilitated by the fendered sliding front.

MEDICAL: Medical attention and hospital facilities available.

DENSITY: Occasionally brackish.

FRESH WATER: Available from pier.
FUEL: All grades available.
FIRE PRECAUTIONS: Special safety regulation forms given when berthed.
GANGWAY/DECK WATCHMEN: Oil Pollution/Safety Inspector placed on board all vessels over 20,000 d.w.t.
CUSTOMS ALLOWANCE: 200 cigarettes/or 200 grammes tobacco and 1 bottle spirits for each man.
IDENTIFICATION CARDS: Gate pass delivered to ship when berthed.
CONSULS: Denmark, Finland, France, Great Britain, Netherlands, Spain, and Sweden have representatives in Tonsberg. W. German consul in Sandefjord. All countries represented in Oslo.
REPAIRS: All kind of ship repairs can be undertaken by nearby ship yards. Service for radio, gyro, radar, echo sounder, data bridge, etc. available. Also classification surveyors representing NV, LR or AB can be called upon.
DRY DOCKS: Available at Sandefjord about 35 miles from Slagen.
REPATRIATION: Changes of crew are available. Transportation by train and plane from Oslo (about 100 km. from Slagen), passenger lines from Oslo. Hotel accommodation available at Tonsberg (10 km. from Slagen).
TIME: GMT plus 1 hour.
HOLIDAYS: New Year's Day; Maunday Thursday; Good Friday; Easter Monday; Labour Day (1st May) 17th May; Ascension Day; Whit Sunday and Whit Monday; Christmas 25th and 26th: Discharging/loading all days.
POLICE/AMBULANCE/FIRE: Police Tonsberg 13355; Ambulance/Fire local at the refinery.
TELEPHONES: Available at berth.
SERVICES: Tanker cleaning services available at Horten, about 15 miles from Slagen.
GENERAL: No ship may immobilize its engines, steering gear, etc. whilst alongside Slagen Jetty.
SHORE LEAVE: Crew members allowed to go ashore.
AUTHORITY: A.S. Norske Esso, Tonsberg.
AGENCY: Several shipbroker firms are established in Tonsberg and may be called upon as acting Agents for owners and/or charterers. A/S Norske Esso, S & T Dept. act as general Agent for all Exxon owned tonnage, cable address "Essoship" Tonsberg.

STAVANGER: 58.58 N. 05.44 E. (See Plan Book)

DOCUMENTS:
Declaration of Health, 1 copy.
List of Goods, including stores, 1 copy.
Crews Lists of Goods liable to duty, 1 copy.
List of Goods, 2 copies for each port of discharge. All Bills of Lading to be entered with marks, numbers, weight and quantity.
General List of Goods, one copy.
A form for entering ports of call where discharging will take place.

PILOTAGE: Vessels approaching from sea and desiring a Pilot should order at least 24 hours notice in so far as possible and confirm arrival at Pilot station at 2 hours notice. Advance order can be sent in following manners:
(*a*) From ships at sea over radio direct to sea Pilot watch (calling frequency 2182 kc/s, from 2 minutes past until 10 minutes past each full hour, or over VHF radio-telephone calling, frequency 156.80 mc/s; Channel 16).
(*b*) From ships at sea over coastal radio station to Pilot station or Pilot office.
(*c*) From broker or shipowner over telephone to sea Pilot station or to any Pilot office which will immediately convey report to sea Pilot station.

Vessels lying in port and desiring Pilot will order Pilot from nearest Pilot office during its office hours and if possible at 4 hours notice.

Vessels approaching from sea as well as vessels lying in port shall when making an advance order state name and destination of vessel and whether 1 or 2 Pilots are desired.

Pilot will be despatched to ships in accordance with advance orders, and vessels are therefore requested to comply with foregoing rules as far as possible in order to avoid having to wait for Pilot.

International provisions for summoning Pilots by signal flags or blue lights, etc., are still in force, but should in future be used as a supplement to radio communications or as sole communication in emergencies.

Pilots are taken on board at:

A. *Feistein Lighthouse*, 19 miles South of Stavanger, or in bad weather 6 miles North of lighthouse under the lee of Rott.

B. *Skudefjorden*, 18 miles N.W. of Stavanger. In bad weather under the lee of Karmoy or Kvitsoy, as weather permits.

Pilot boats are stationed at Tananger and Skudesneshavn. No boats are out cruising.

RADAR/VHF: Radar service for inner harbour. At Kvitsoy Pilot station radar service may be obtained over VHF Channel 16.
ANCHORAGE: Found in the Byfjord, 3 nautical miles North of Stavanger. Harbour pilots recommended when anchoring.
MAX. SIZE: Largest depth alongside goods and passenger quays is 30 ft. Depth alongside oil refinery 16.5 m. Max. draft for tankers, 48 ft.
TUGS: Normally not used.
BERTHING: The coasting and the foreign trade is located in the Western harbour, comprising the 2 main quays, namely the Skagen Quay and the Strand Quay. These quays measure 1,600 m. with depths alongside 24 to 30 ft.

The quays are equipped with one 6-ton crane and eight 3-ton cranes. A floating crane with a lifting capacity of 65 tons available.

Grain: Rogaland Felleskjop: Capacity for storing 72,000 tons quay length 190 m., depth alongside 48 ft. Discharging capacity 200 t.p.h. Stavanger Havnesilo: Storing capacity 140,000 tons, quay length 170 m., depth alongside 51 ft. Discharging capacity 500 t.p.h.

Roll-on/roll-off: Traffic is offered by a ferry berth constructed for ships up to 5,000 g.r.t., depth alongside 26 ft.

Offshore oil-exploration bases: Aker-Norsco A/S at Risavik, Tananger North Sea Exploration Services A/S, Dusavik.

STEVEDORES: No particular ETA advices required.
MEDICAL: Agents should get advance notice to secure speedy service. Hospital facilities available.
TANKERS: Discharge at Sola refinery terminal where there are 3 berths, depth alongside up to 16.5 m. It is intended to enlarge these facilities to accommodate 200,000 d.w.t. vessels with restricted draft.

Esso Norske: 3 nautical miles South of central harbour, depth alongside 45 ft.

Norske Shell A/S: 14 nautical miles S.W. of central harbour, depth alongside 38 ft.

Norske Braendselolje A/S: 7 nautical miles South of the central harbour.

Texaco Oil: 1 nautical mile from central harbour, depth alongside 25 ft.

A/S Kulimport: Coal and coke. Length of wharf 116 m., depth alongside 27 ft.

DENSITY: 1025, no change in relation to state of tide.
FRESH WATER: Delivered from quay or from water boat.
FUEL: Normal grades available without advance notice.
GANGWAY/DECK WATCHMEN: Not required.
OPENING/CLOSING HATCHES: Usually carried out by crew.
CUSTOMS ALLOWANCE: Tobacco: 20 cigarettes per day. Wine and/or Spirit: 2 bottles of wine or 1 bottle of brandy.
CONSULS: Germany, C. Middelthon, Tel. 21.040; Denmark, Leifbuch Hansen, Tel. 27.575; U.K. Colin W. Peck, Tel. 23.652; Sweden, Charles R. Bergensen, Tel. 27.500.
REPAIRS: All kinds of repairs available.
DRY DOCKS: One, 545 by 75 by 24 ft. Marine slipway up to 1,500 d.w.t.
AIRPORT: 10 km. from port. Airlines to Continent, U.S.A.
TIMES: GMT plus 1 hour. No alterations during year.
HOLIDAYS: 1st January; Maunday Thursday; Good Friday; Easter Monday; 1st May; 17th May; Whit Monday; Christmas Day and Boxing Day.
POLICE/AMBULANCE/FIRE: Police Tel. 31.520; Ambulance 21.500; Fire 22111.
TELEPHONES: There are arrangements for placing telephones on board.
SHORE LEAVE: No restrictions.
AUTHORITY: Stavanger Havnevesen.
AGENT: C. Middelthon's Dampskibsexpedition, Skansegt. 13–15, POB 27, 4001 Stavanger. Tel. 21040. After office hours: 24936; 32541 Telex: 33034 "Cmdex".

SUNNDALSORA: 62.41 N. 08.36 E.

DOCUMENTS:
2 Crew Lists
2 Passenger Lists
Declaration of Health
General Declaration
Cargo List
Cargo Manifest
Personal Effects List

PILOTAGE: Telegraphic address of Pilot Station: "Grip Pilot". Description of Pilot Boat: White hull, orange wheelhouse, length 43 ft., speed 18 knots. The Pilot has to be taken on board 1 nautical mile East of Grip Lighthouse (Latitude: 63° 14′ N., and Longitude: 07° 37′ E.), no alternative area. No anchorage for vessel awaiting Pilot.
ANCHORAGE: Poor conditions in the Sunndalsfjord. Possible to anchor at Freifjord and Bolgsvaet West of Kristiansund.
RESTRICTIONS: No restrictions.
MAX. SIZE: Max. draft 34 ft.
HEALTH: "Declaration of Health" to be issued before arrival.
RADIO: Rogaland Radio and (20–30 hrs. before arrival) Alesund Radio.
VHF: For inner harbour on Channel 16 (normally in use when mooring).
RADAR: No Port Radar Service.
TUGS: Not available in Sunndalsora. Nearest Alesund, steaming time about 12 hours. Tugs only required when Pilot/Master find it necessary.
BERTHING: Length of quay: 1,007 ft. Low water depth: 34 ft. Load/discharge normally by shore equipment.
CRANES: 2×6 tons, 1×10 tons and 1×50 tons.
BULK CARGO FACILITIES: 1 grab crane 280 t.p.h.
SPECIALISED CARGO HANDLING FACILITIES: None.
BRIDGES: None.
STEVEDORES: No notice required.

MEDICAL: Doctors available in Sunndalsora. Nearest hospital: Kristiansund or Molde (60 miles from Sunndalsora).
TANKERS: The usual rules for tankers to be complied with.
DENSITY: Average density of the port 1019 – 1020.
FRESH WATER: Available.
FUEL: Available in smaller quantities (from Mobil and BP).
FIRE PRECAUTIONS: No specific precautions.
CONSULS: None. Nearest Kristiansund: Great Britain, Denmark, Finland, France, Holland, Portugal, Sweden, West Germany.
REPAIRS: Only small repairs can be carried out.
DRY DOCKS: None.
SURVEYORS: Nearest Kristiansund (Norske Veritas) and Bergen (Lloyds).
GANGWAY/DECK WATCHMEN: Not required.
HATCHES: Opening/closing to be carried out by crew.
CUSTOMS ALLOWANCE: Quantity permitted for each Crew member to be held out of bond: 200 cigarettes or 200 grams tobacco, 1 bottle spirit and 1 bottle of wine.
CARGO GEAR: Load /discharge effected by shore gear.
REPATRIATION: Crew changes and repatriation possible.
AIRPORT: Kvernberget (Kristiansund) and Aro (Molde), both at 60 miles distance and with regular air service.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: May 1st and May 17th. No cargo work can be arranged on those days.
POLICE/AMBULANCE/FIRE: Police Tel.: 91166, Ambulance (doctor) 91479, Fire 91122, Lifeguard 91933.
TELEPHONE: On request, telephone may be rented from Ardal og Sunndal Verk a.s.
SERVICES: Not available. Nearest Kristiansund or Molde.
SHORE LEAVE: Crew members allowed ashore.
IDENTIFICATION CARDS: Ardal og Sunndal Verk a.s. demands identification cards, obtained from Dock Master.
REGULATIONS: Forbidden to take photographs within boundaries of Ardal og Sunndal Verk a.s.
DELAYS: Usually no delay if notice of arrival given to Agent in good time.
DEVELOPMENTS: No developments expected in foreseeable future.
GENERAL: No cargo on Saturday and Sunday.
AUTHORITY: Sunndal Havnevesen, Sunndalsora.

SVOLVAER: 68.14 N. 14.35 E.

DOCUMENTS:
2 Crew Lists.
2 Passenger Lists.
Custom Documents.
Stores List.
Manifest.
Bill of Lading.
Ship's Papers.
Valid Deratisation Exemption Certificate.
Ships arriving from Finland, Denmark, and Sweden need Customs permit from last port.

PILOTAGE: Vessel approaching Svolvaer may call Bodo Radio, 2182 kc/s. by radio asking for Svolvaer harbour pilot. Telegraph ETA Svolvaer 24 hours before arrival. All communication with harbour pilot boat is via Bodo Radio. No VHF. Exact position for pilot boat is 68° 11′ 30″ N. 14° 36′ 00″ E. In the event of bad weather call Lodingen Pilot station, position 68° 24′ 00″ N. 16° 02′ 00″ E., via Bodo Radio for further information. Different types of pilot boats are used, but usually the pilot boat flies pilot flag. No special requirements for boarding, except usual pilot ladder.
ANCHORAGES: Boundaries for safe anchorage 68° 13′ 36″ N. 14° 37′ 00″ E., 68° 13′ 48″ N. 14° 36′ 12″ E. Depth in area about 25 fathoms.
RESTRICTIONS: Ships of 2,000 tons or more berthing at daylight only.
MAX. SIZE: Max. permissible length 520 ft., draft 30 ft.
HEALTH: Pratique is automatic given by radio. Vessel only required fly yellow flag. In event of any suspected disease or fever on board call Svolvaer Harbour Master by telephone via Bodo Radio (2182 kc/s.).
RADIO: Call Bodo Radio by R/T 2182 kc/s. or VHF-Channel 16. Svolvaer Harbour office VHF-Channel 16.
TUGS: No tugs available.
STEVEDORES: All information regarding gangs, loading and discharging rates can be obtained by calling ship's Agent in Svolvaer via Bodo Radio.
MEDICAL: Hospital facilities available.
TANKERS: There are 2 discharging berths for oil carriers in Svolvaer. Diameter of lines at B.P. berth 6 in. and 8 in., at Shell 8 in. At the Shell berth tankers moor stern to and discharge through stern lines.
DENSITY: Density in port is 1025.
FRESH WATER: Is delivered from piers by hose with a rate of about 20 t.p.h. Water is not available at B.P. berth.
FUEL: All kinds of fuel oil are available.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Normally done by ship's crew but can also be done by stevedores.
CERTIFICATES: Ship's Register Certificates.
CUSTOMS ALLOWANCE: Tobacco: Quantity for each crew member is 20 cigarettes or 20 gr. tobacco and 20 leaves cigarette papers per day. Wine and/or Spirit: For crew members 1 bottle spirit or wine (0.75 litre) for each passenger 0.25 litre.
IDENTIFICATION CARDS: Not required.
CONSULS: Swedish and Italian consulates. Lloyd's sub agent.
REPAIRS: Nearly all types of engine and deck repairs. Both for internal combustion and turbine engines.
DRY DOCKS: No dry docks in port, only slipways for ships up to 160 ft.
REPATRIATION: Facilities for effecting crew changes are available.
AIRPORT: Four km. from town. Nearest main airport is Bodo.
TIME: Local time is GMT plus 1 hour.
HOLIDAYS: Official holidays stated by Norwegian Government.
POLICE/AMBULANCE/FIRE: Call telegraph station Svolvaer.
TELEPHONES: Phones on pier.
GENERAL: Svolvaer is the main port in Lofoten Island, and a typical fishing harbour. Radar-Decca-Radio and VHF service, and all other electrical services can be executed.
SERVICES: Compass adjusting.
AUTHORITY: Harbour Master Svolvaer.

THAMSHAVN (Thamshamn): 63.20 N. 09.52 E.

DOCUMENTS:
Health Certificate.
Crew List.
Passenger List.
Store list.
Bill of Lading.
3 Manifests.

PILOTAGE: 24 hours prior arrival Grip, Pilots can be ordered by cable to "Loskontoret, Kristiansund N." or by telephoning Kristiansund Pilot Office, tel. 74333 during office hours, and 71481 private. Pilots can also be ordered by radio through Kristiansund Radio or through Agents. Use Channel 16 for VHF., contact to Kristiansund Pilot Office, or pilot boat. Pilot boat equipped with radio telephone 2182, carries red and white flag during day and white and red light during night.
ANCHORAGE: Vessels should anchor 150 m. off piers where depth between 26 and 30 m. Anchoring between piers and buoys is not permitted.
MAX. SIZE: Depth at Import Quay 20 ft. MLW. Ships of 28 ft. draft can load at Pyrites Quay.
RADIO: Vessel should route ETA cables to Agent through Rogaland Radio or Aalesund Radio.
TUGS: No tugs needed or available.
BERTHING: Berthing only between 0700 and 2400 hrs.
CARGO HANDLING: 1 berth is specially equipped for handling of pyrites in bulk. Ships of 28 ft. draft can load at the pyrites quay. Loading by conveyor. There are no berths equipped for containers or roll-on/roll-off traffic, nor berths handling liquid chemicals or LPG carriers.
STEVEDORES: Arranged by Agent. No ETA to stevedores necessary.
MEDICAL: Hospital facilities available.
FRESH WATER: Available, delivered from berth.
FUEL: No fuel supplies available. Nearest port for such supplies is Trondheim.
GANGWAY/DECK WATCHMEN: Not compulsory, and this service is left to the discretion of the Master.
OPENING/CLOSING HATCHES: By crew.
CERTIFICATES: Ship's Register.
CUSTOMS ALLOWANCES: Each crew member allowed 20 cigarettes on shore. When leaving ship, 200 cigarettes and 1 bottle of wine or 1 bottle of spirit permitted.
IDENTIFICATION CARDS: Not required.
CONSULS: Nearest consul available in Trondheim.
REPAIRS: Only small repairs can be carried out.
DRY DOCKS: None.
AIRPORT: Nearest airport, Vaernes, 62 miles N.E. Served by regular airlines with several flights per day.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: January 1st; Easter Holidays; Ascension Day; Whit Monday; 1st and 17th of May; December 25th and 26th.
POLICE/AMBULANCE/FIRE: All mentioned services obtained through Agent or by contacting local telephone exchange.
TELEPHONES: No facilities for placing telephones on board ships.
SERVICES: Provisions available.
SHORE LEAVE: Permitted.

TONSBERG: 59.16 N. 10.25 E.

DOCUMENTS:
Ship's Register.
Crew Lists.
Customs Manifest for each crew member (cigarettes, spirits, etc.).
Store List. Cargo Papers. Health Certificate.

PILOTAGE: Sea pilots obtainable from Ferder pilot station. Pilots normally take vessels to berth; also harbour pilot on the spot.
ANCHORAGES: Good anchorages at Byfjorden and Traela; anchorages for large vessels are found in Narverodbukten and Husoyflaker.
MAX. SIZE: 18 ft. draft for East entrance and 21 ft. draft for West entrance. Up to 30,000 tons in ballast.

RADIO: Cable ETA via Tjome Radio prior arrival.
TUGS: Are available.
BRIDGE: 1 bascule bridge over East entrance. Working days open 0600 to 2100 hrs., holidays 0900 to 1700 hrs. Signal 1 long and 2 short to open bridge. Opening can also be arranged by VHF during night-time. Horizontal clearance 88 ft., depth 22 ft.
MEDICAL: Medical, dental and hospital facilities available.
DENSITY: Occasionally brackish.
FRESH WATER: Available from hydrants at quays.
FUEL: Delivered by lorry.
GANGWAY/DECK WATCHMEN: Available on request.
CUSTOMS ALLOWANCE: 200 cigarettes or tobacco and 1 bottle spirits, for each man.
CONSULS: Britain, France, Netherlands, Finland, Denmark, Sweden and Spain. All vice-consuls.
REPAIRS: All types of repairs available.
DRY DOCKS: At Kaldnesmek, a shipyard for total length of 515 ft. The shipyard is building ships up to about 50,000 d.w.t.
REPATRIATION: Available by train from Tonsberg, plane and passenger lines from Oslo (about 100 km. from Tonsberg). Fairly good hotel accommodation in Tonsberg.
TIME: GMT plus 1 hour.
HOLIDAYS: New Year's Day; Maundy Thursday; Good Friday; Easter Monday; Labour Day (1st May); 17th May; Ascension Day; Whit Monday, Christmas (25th and 26th December). Mostly no working.
POLICE/AMBULANCE/FIRE: Police 13355; Ambulance 13370; Fire 11656.
TELEPHONE: Lines available on board vessel.
SERVICE: Mostly all services or equipment available from Tonsberg or Oslo. Inform prior arrival.
SHORE LEAVE: Crew members allowed to go ashore.
DELAYS: Ice during January and February, but port kept open by ice breakers.
AUTHORITY: Harbour Master, Tonsberg Havnekontor.

TROMSO: 69.39 N. 18.58 E.

DOCUMENTS:
Trade Certificate.
Tonnage Certificate.
Certificate of Nationality.
Number of Crew and Passenger Lists.
Customs and Health Documents.
Manifest and Bills of Lading.
PILOTAGE: Telegraphic address of pilot station is "Tromso Pilot Station". Order latest 12 hours before arrival.
ANCHORAGE: Depth at anchorage is 15-35 m.
RESTRICTIONS: No restrictions on night entry.
RADIO: Tromso Radio VHF Channel 16–26. Harbour Office Channel 16 and 12. 20 miles from town.
TUGS: If necessary, join vessel North or South end of harbour.
BERTHING: Ships can berth at quay, depths up to 34 ft., lengths of quay 100–200 m. (New harbour, Breivika), equipped for container handling, truck 20 tons.
BRIDGES: Tromso Bridge, 60 m. wide, 36.5 m. high.
Sandnessundet Bridge, 120 m. wide, 41 m. high, dredged min. depth 10.4 m.
STEVEDORES: Ordered by Agent. No ETA to stevedores necessary.
MEDICAL: Master to advise by Radio prior to arrival if medical attention required aboard. Hospitals in town (University).
TANKERS: There are 4 oil berths:
Norol – 20 ft. depth.
Mobil Oil – 17 ft. depth.
Esso – 31 ft. depth.
Shell – 39 ft. depth.
FRESH WATER: Most berths supplied by pipeline.
FUEL: All grades available.
FIRE PRECAUTIONS: Ordinary restrictions.
GANGWAY/DECK WATCHMEN: Available but not compulsory.
OPENING/CLOSING HATCHES: Crew allowed to open and close.
CUSTOMS ALLOWANCE: Crew members 200 cigarettes or 20 cigars or 100 grams tobacco, and 1 bottle spirits.
IDENTIFICATION CARDS: Not required. Seaman's book.
CONSULS:

Belgium	81074–82417	Sweden	85090–81336
Denmark	81148–82310	Germany	81088–85665
France	81144–85663	Italy	85040–82604
Great Britain	84050–82395	Netherlands	85040–82604

REPAIRS: All engine and instrument repairs. Shipbuilders' Yard.
DRY DOCKS: 4 slip-ways 80–222 ft. 1 small dock.
AIRPORT: 5 km. from town.
TIME: GMT plus 1 hour.
HOLIDAYS: No work on New Year's Day and Christmas Day.
POLICE/AMBULANCE/FIRE: Police 85080; Ambulance 81100; Fire 81122. Port Pilot Station 81191–82537.
SURVEYORS: Lloyds, N.V.
SHORE LEAVE: Permitted.
REGULATIONS: Harbour Pilot compulsory. Speed in port waters max. 6 knots. Ships size passing Tromso Bridge max. 7,000 tons displacement.
DELAYS: Minor delays only.
SERVICES: Compass adjusting, stores, etc.
AUTHORITY: Port Manager.

TRONDHEIM: 63.25 N. 10.24 E.

DOCUMENTS: See "Bergen".
PILOTAGE: Harbour Pilot: Havne Kontoret, Tel. 28015 or VHF Channel 16.
RESTRICTIONS: The fjord is very deep and easy to enter. The channel is clear and ice-free throughout the year.
MAX. SIZE: Controlled by depth at berth. See below.
HEALTH: Call "Havne Kontoret" by radio for free pratique.
RADIO: Orlandet Radio (also VHF).
TUGS: Arranged by Agent.
BERTHING:

River Harbour	Quays	1–10	Depth alongside up to	26 ft.
Outer Harbour	,,	12–18	,, ,, ,, ,,	18 ,,
Inner Harbour	,,	19–24	,, ,, ,, ,,	20 ,,
Ilha Pier		26–32	,, ,, ,, ,,	29 ,,
Pier II	,,	A–D	,, ,, ,, ,,	33 ,,
Rosenborg Quay	Length	630 ft.	,, ,, ,, ,,	16.5 ft.
Thaulow Quay	,,	187 ,,	,, ,, ,, ,,	15 ,,
Transit Quay	,,	411 ,,	,, ,, ,, ,,	29 ,,
Coal Crane Pier	,,	700 ,,	,, ,, ,, ,,	23 ,,

BRIDGES: Skansen Bridge, Jernbanebrua, and Brattor Bridge divide Inner Harbour.
STEVEDORES: Available.
MEDICAL: All facilities available.
TANKERS: Berth Depth 9–12 m. Total length of quays 270 m. easy access. Mobil, Esso and Shell installations.
FRESH WATER: By hose from quay.
FUEL: Available.
CUSTOMS ALLOWANCES: 200 cigarettes and 1 bottle spirit, 1 bottle wine allowed each man.
IDENTIFICATION CARDS: Required.
CONSULS:

Belgium	Tel. 19 100	Ireland	Tel. 22 861
Costa Rica	,, 30 000	Italy	,, 32 080
Denmark	,, 20 580	Holland	,, 29 590
Finland	,, 20 025	Portugal	,, 20 361
France	,, 28 526	Great Britain	,, 35 590
Germany	,, 29 644	Spain	,, 20 689
Greece	,, 29 771	Sweden	,, 31 000

REPAIRS: All types of deck and engine repairs are possible.
DRY DOCKS: 1 available with capacity of 3,600 d.w.t. and a floating dock for vessels of 8,000 d.w.t.
REPATRIATION: Can be arranged.
AIRPORT: 35 km. away from port. Regular airlines.
TIME: GMT plus 1 hour.
HOLIDAYS: Christmas (2 days); Easter, (4 days); 17th May; Ascension Day; Whitsun, (2 days).
POLICE/AMBULANCE/FIRE: Police 27500; Ambulance 21-510; Fire 21-505.
SHORE LEAVE: Allowed.
DEVELOPMENTS: Plans for reconstruction of outer Basin with new bridges also planned.
AUTHORITY: Trondheim Havnekontor.

VADSO: 70.04 N. 29.45 E. (See Plan Book)

DOCUMENTS:
Trade Certificate.
Tonnage Certificate.
Certificate of Nationality.
Number of Crew and Passenger Lists.
Customs and Health Documents.
Manifests and Bills of Lading.
PILOTAGE: Vessels approaching from sea and desiring Pilot should order at 24 hours notice and confirm arrival at Pilot Office, Vadso, at 2 hours notice. The advance order can be sent over coastal radio station to Pilot Office, the Harbour Master, Vadso, tel. Vadso 51235 or 51143. Harbour Pilot has to be taken on board in position Lat. 70° 45′ N. Long. 29° 41′ E. VHF Channel 16.
ANCHORAGES: Anchorage for vessels up to 400 tons in basin, with depths varying between 14 and 21 ft. Larger vessels anchor W. of the mole in 16 to 20 m. Outer harbour inside breakwater, inner harbour, further to East. Entrance to inner harbour is by buoyed and lighted channel 1,560 ft. long and 115 ft. wide, this has been extended by the addition of a fishery basin 750 ft. long 800 ft. wide. Outer harbour is 1,000 ft. long, 700 ft. wide, depths 15 to 30 ft.
MAX. SIZE: Max. length of vessel 300 ft. and breadth 45 ft. Draft 16 ft. Ship about 3,000 g.r.t.
HEALTH: Health documents necessary.
RADIO: Call Vadso Coastal Radio Station, through which contact by telephone Agent or Harbour Master or Vadso Harbour on VHF Channel 16.
STEVEDORES: Stevedores arranged. Agent telephone 51395 Vadso.
TANKERS: Only small tankers can discharge. Discharging berth only for 500 g.r.t. tankers, draft 13 ft.
FUEL: Gas and diesel oil. Water available on all quays.
GANGWAY/DECK WATCHMEN: Watchmen necessary. Master can use ship's crew as gangway and deck watchmen. Not necessary to use watchmen from the Watchmen Service.

CUSTOMS ALLOWANCE: Tobacco: Wine/Spirit: For 10 days, each crew 200 cigarettes, or 200 grams tobacco. 0.25 litre spirit, for each crew member.
CONSULS: Finland, tel. 51225 Vadso.
REPAIRS: Only smaller types of deck and engine repairs are possible.
AIRPORT: Vadso Airport 4 km. from port. Widero flights 4 times per day.
TIME: Local time, GMT plus 1 hour.
POLICE/AMBULANCE/FIRE: Police 51271 or 51593 Vadso; Ambulance 51845 or 51691 Vadso; Fire 51122 or 51554 Vadso.
AUTHORITY: Vadso Havneseven.

NOTES

Please also advise Shipping Guides Ltd.

Oman, (Sultanate of)

MINA-AL-FAHAL: 23.39 N. 58.32 E. (See Plan Book)

DOCUMENTS:

Required on arrival (provided by vessel):
2 copies Crew List and 2 copies of Vaccination List.

All other necessary papers will be supplied on arrival by the Berthing Master.

PILOTAGE: The Berthing Master will board incoming tankers off Fahal Fairway Buoy, or as directed by VHF. Tanker should arrive at this position, make a good port lee, and take way off.

Harbour steaming is deemed to start at this point. The port side derrick should be rigged and crew standing by at the derrick ready to lift the mooring equipment from the launch when the Berthing Master comes on board.

The pilot access should be in good condition, clean and ready on the port side. Tankers of 70,000 tons Summer deadweight and above in ballast or partly loaded condition should have either a pilot hoist or a combination of accommodation ladder and pilot ladder rigged.

ANCHORAGE: If a vessel is required to anchor the information will be passed by VHF. The normal tanker anchorages are:–

A. Fahal Is. Lt. Brg. 015° × 1.0′
B. Fahal Is. Lt. Brg. 045° × 1.3′
C. Fahal Is. Lt. Brg. 075° × 1.0′
D. Fahal Is. Lt. Brg. 115° × 1.0′

The coastal tanker anchorage is:–
Fahal Is. Lt. Brg. 340° × 1.1′

Cargo ship anchorage area:–
A. Fahal Is. Lt. Brg. 340° × 2.0′
B. Fahal Is. Lt. Brg. 345° × 1.6′
C. Fahal Is. Lt. Brg. 000° × 1.7′
D. Fahal Is. Lt. Brg. 015° × 1.6′

Ships proceeding to an anchorage within the Port Area should pass North of Fahal Island and under no circumstances enter the prohibited area unless instructed to or accompanied by a Mina al Fahal Berthing Master.

RESTRICTIONS: Open sea approaches.

MAX. SIZE: No length limitation. Draft up to 96 ft. Tankers up to 550,000 d.w.t. can be accommodated.

HEALTH: When advising ETA, include in message whether any sickness on board.

Port Health Officer boards with Berthing Master, this Officer will carry out any necessary vaccinations. 'Q' flag to be flown until pratique granted.

RADIO: ETA messages should be sent to Petromar Muscat via Muscat Radio (call sign A4M). If no contact can be established with Muscat Radio, the message should be sent through an alternative coast station such as Bahrain Radio.

The message should contain the following information.

(a) ETA in local time and date in plain language to avoid multilation.

(b) Whether there is any sickness on board.

(c) Whether any crew require medical treatment and very briefly the nature of the complaint.

(d) Last port of call.

VHF communications should be established as soon as possible calling Fahal Control on Channels 19 or 12. The range is about 80 miles to the Northward but only 20 miles to Eastwards because of screening by mountains. Channel 19 area basically long range while the working Channel is Channel 12 and is manned 24 hours a day by either Fahal Control or Fahal Pilots. The station may call vessels on Channel 16, although a permanent watch on Channel 16 will *not* be maintained. The mooring launches are also equipped with Channels 16 and 12 but mooring operations are carried out using UHF radio sets.

TUGS: None available and not required.

BERTH DESTINATION: 3 single buoy moorings with floating hose strings. SBM lights are ISO.W.

SBM No. I: Crude export and marine fuel oil import and export. This buoy is served by 2 × 30 in. submarine crude lines and 2 × 10 in. submarine fuel lines each 10,300 ft. long.

The floating crude hoses are 2 × 810 ft. long × 20 in. reduced to 16 in. for manifold connection. Same hoses are used for Fuel Oil imports these lines having a displacement connection ashore for emptying the crude content. Bunkering is by a single 12 in. hose 820 ft. long.

This buoy is capable of handling any vessel up to 229,000 d.w.t. tonnes and under the deadweight if sailing draft will not exceed 64 ft.

SBM No II: For crude and bunker export and is served by 1 × 40 in. submarine crude line and 2 × 10 in. submarine fuel oil lines each 13,980 ft. long. The floating crude hoses are approx. 2 × 1,100 ft. long x 20 in. reduced to 16 in. at manifold connection. Bunkering is by a single 12 in. floating hose. Maximum size ship 550,000 d.w.t. tonnes and max draft of 96 ft.

SBM No. III: Fuel export only served by two 10 in. submarine hoses each 8,003 ft. long. The floating hose is one 8 in. line approx. 700 ft. long. Max. size of ship is 100,000 tons and under this deadweight if sailing draft will exceed 46 ft.

Loading crude is by gravity and rates vary. If loading from upper tank farm 9,000 t.p.h. but only 5,500 t.p.h. if loading from lower tank farm.

Bunker rate is approx. 450 t.p.h. bunker discharge at SBM-I maximum 3,000 t.p.h. maximum back pressure 150 p.s.i.

BERTHING: Vessels berth head to buoy and are provided with 2 x 4.5 in. mooring snotters picked up from the mooring launch when the pilot boards. Vessels over 230,000 d.w.t. tonnes are provided with two 15 in. × 80 ft. nylon braidline snotters. Connection at SBM-I and III is to two 12 in. plaited nylon lines 150 ft. long; at SBM-II to two 15 in. plaited nylon lines 150 ft. long. A suitable messenger rope should be provided by ship. An Assistant Berthing/Loading Master will advise in all mooring and hose connection operations which are carried out by ships staff.

HOSE CONNECTIONS: Ships port side derrick must plumb over relevant manifold. This derrick should be ready on arrival at the pilot boarding area to pick up the mooring gear and reducers (if necessary) safety chains etc. for hose connection. Derrick to be in good condition and be rigged for a SWL of a minimum of 10 tons for SBM-I and II and 5 tons for SBM-III.

BALLAST: No facilities for reception of dirty ballast.

Tankers should arrive with clean ballast, lines and pumps and no oil should be released into the sea.

MEDICAL: Medical treatment can be given by Petroleum Development (Oman) Ltd.'s medical staff to crews of ships on Time Charter to Shell International Marine on ships using P.D. (O) Ltd.'s tanker agency facilities. A charge of R.O.17 is made per hour for launch hire and transport facilities. Dental treatment available but at least 24 hours notice required.

REPAIRS: It is not permitted to immobilise main engines whilst moored to the SBM's; under no circumstances should the propeller be turned in the ahead direction.

DENSITY: Approximately 1026.

FRESH WATER: Not available.

FUEL: Fuel oil only available. Limited store facilities and at least 24 hrs. notice is required.

A wide range of marine lubricants is available and is supplied in drums. At least 24 hours notice is required for supplying lubricants.

REPATRIATION: Crew changes are possible at Mina-al-Fahal provided the Agent receives 72 hours notice (excluding Fridays and Holidays), (24 hours notice if using Petroleum Development as Agent) giving full particulars of embarking/disembarking crew, such as full name, nationality, place and date of berth, passport/seaman's book number with date and place of issue and expiry date, and also destination for repatriation of disembarking crew members, to enable Agents to obtain necessary permits and arrange air passages.

N.B. If the information required as above is received on a Thursday or a day preceding a holiday, the time mentioned of 72 hours will not be sufficient as no permits can be obtained from the Authorities during holidays.

Note: No crew changes possible at this time (November 1976) as a Government Decree has been issued cancelling crew changes until the present hi-jacking security procedures have been relaxed.

TIME: GMT plus 4 hours all year round.

SHORE LEAVE: Not possible.

GENERAL: *Liquor.* Trading in liquor strictly prohibited and no alcoholic drink should be offered to Arab nationals.

AUTHORITY: Petroleum Development (Oman) Limited.

AGENT: See "Port Qaboos" (Mutrah).

Petroleum Development (Oman) Ltd. can also act as Agent. Petromar Muscat are on VHF Channel 12.

PORT QABOOS (Mutrah): 23.37 N. 58.34 E. (See Plan Book)

Muscat has ceased to be a commercial port and instead vessels now call at Port Qaboos.

PORT LIMITS: From the level of high water springs at a point near Ras Kab at Long. 58° 33.2′ East on a line due North to Lat. 23° 41′ North;

Thence due East to Long. 58° 35.6′ East;
Thence due South to Jazirat Muscat;
Thence in a generally Southerly direction by the line of high water on the Western side of Jazirat Muscat to Pinnacle Rock;
Thence S.W. to the Easternmost point of Siraz al Gharbiyah;
Thence by the line of high water springs to the point of commencement.

DOCUMENTS:

Required on Arrival:
4 Copies Crew List.
1 Copy Maritime Health Declaration form with ports of call from commencement of voyage.
2 Copies Vaccination List.
6 Copies Passenger List.
3 Copies in transit Passenger List.
3 Copies Hatch List.
5 Hazardous Cargo Lists.
3 Heavy Lift Lists.

To be airmailed in advance:
5 Copies Cargo Stowage Plans.
9 Copies Cargo Manifest.
1 Copy Freight Manifest.

Customs and Immigration requirements for vessels entering and leaving ports: 24 hours advance notice, cargo manifest and passenger list, crew personnel declaration. No cargo vessel is allowed to enter until immigration formalities are completed off the port.

PILOTAGE: Compulsory for vessels other than exempted vessels as defined in Port Rules and Regulations.

Arrival notice requirements: ETA, LOA, draft 72 hours, 48 hours, 24 hours before arrival. Berthing and unberthing – 24 hours a day.

MAX. DRAFT: Depth of entrance channel at LAT. 35 ft. 06 in. (10.8 m.). Also see "Berthing".

TUGS: Three twin screw tugs, 1,400 h.p., 1,600 h.p. and 2,000 h.p.

APPROACH: Port Qaboos has a very open approach with a deep water anchorage. The hilly coast is radar conspicuous. Lights on Fah Is., Jazirat Muscat and the Breakwater make night navigation fairly simple. There is no appreciable current once inside the bay.

Vessels approaching from a North or Westerly direction; pass North of Fahal Fairway buoy situated in position Lat. 23° 41′ 00″ N., Long. 58° 33′ 12″ E.

Vessels approaching from an Easterly or Southerly direction; pass North of Jazirat Muscat.

Prohibited Entry Area: The whole of the bay of Khawr Muscat, South of a line between Ras Kalbuh and Ras Muscat.

ANCHORAGE: Vessels should anchor Northwest of the breakwater within the area enclosed by the following perimeters:

1. A line extending 060° (T) from Port Qaboos breakwater.
2. The Western most extremity of Port Qaboos.
3. A line extending 325° (T) from Muscat forward leading light after crossing perimeter (1).

All areas described above are clearly defined in the current edition Admiralty Chart No. 2869.

Prohibited Anchorage Area: The area enclosed by the following perimeters is a prohibited anchorage area:

North boundary:	The parallel of Lat. 23° 41′ 00″ N.
East boundary:	The meridian of Long. 58° 36′ 00″ E.
South boundary:	Sultanate of Oman coastline.
West boundary:	Muscat forward leading light bearing 145° (T) from seaward and Port Qaboos breakwater light bearing 240° (T) from seaward.

Severe penalties are imposed for vessels infringing the above prohibited areas.

HEALTH: International Health Regulations apply. Pratique may be granted by the Harbour Master on receipt of following information:

1. All Smallpox/Cholera vaccinations valid.
2. Valid Derat Certificate.
3. No sickness on board.
4. No sickness at last Port.
5. Country of origin and date of departure.

Pilot will issue Health Form on boarding. Port Health require:

1 Crew List
1 Vaccination List
Valid Derat Certificate
Last Port Clearance

RADIO: Port control can be contacted on VHF Channel 16 or Channel 14 or on R/T via Muscat Radio. Hours of operation 0700 – 1800 hrs. except Friday when hours of operation depends on actual movement in the Port.

BERTHING: There are 9 deep water berths: 3 coaster berths and 1 berth for launches. The berths vary in length from 76 to 228 m. and are sheltered by a breakwater on one side and cliffs on the other. Nine berths can take vessels of up to 36 ft. draft and the remaining 3 are reserved for shallow draft vessels drawing 12/16 ft. of water.

Supporting the berths are 9 modern transit sheds facing broad uncluttered aprons, providing both covered and open storage space. Two berths front directly on to large open areas ideally suited for rapid discharge of containers and oversized units requiring direct delivery.

Berth	*Length*		*Depth at LAT*		
No.	*(ft.)*	*(m.)*	*(ft.)*	*(m.)*	
1	600	183	41	12.5	
2	600	183	41	12.5	
3	750	228	32	9.8	
4	600	183	30	9.1	
5	600	183	30	9.1	
6	650	198	29.5	9.0	
7	600	183	24	7.3	To be dredged to 30 ft.
8	600	183	24	7.3	To be dredged to 30 ft.
9	450	137	13	4.0	
10	500	152	13	4.0	
11	600	183	26	8.0	
12	250	76	10	3.1	
13	500	152	7	2.2	

Nos. 1 and 2, 4, and 5, 7 and 8 berths are "in line", therefore larger vessels can occupy part of a second berth when necessary.

Transit sheds and cold storage facilities: 9 transit sheds and 1 cold store adjacent to the port, capacity of cold store 3,000 tonnes plus cool rooms, blasting facility and ice making plant. Facilities for electrical connection of refrigerated containers with Kheops and Wilco Plugs.

SPECIAL HANDLING FACILITIES: Bulk Cement Silos: Capacity 6,000 tons, supplied by underground pipe line from the berth.

Grain Silos: Capacity 30,000 tons supplied by quayside underground conveyor from the berth.

In conjunction, 2 km. from the port, a highly automated mill produces various flour and animal feed products for local consumption and export.

The port has modern container and Ro-Ro handling equipment, including a Mafi-type roll trailer system, backed up by mobile cranage of up to 150 tons capacity.

A plan to convert one of the existing berths to a specialised container berth is now under consideration.

At present containers can only be accepted from self-sufficient vessels. Containers are transported by trailers and handled in stacking area by mobile crane or forklift truck. Reliance Mercury Tractors of 160 b.h.p. with Mafi-type trailers are available for Ro-Ro vessels. Lash and BACAT service.

CRANES: 10 Mobile Cranes 3 tons – 25 tons, 1 Mobile Crane 70 tons, 1 Mobile Crane 150 tons, 81 Fork Lift Trucks 4,000 lbs. – 16,000 lbs. Trailers and Tractors are also available.

There are no fixed quay cranes.

STEVEDORES: The labour position is fair, except in the date-picking season June to August.

Landing rates: bagged cargo 4/600 tons per day; general 200 tons per day; timber 100/150 tons per day during fair weather provided no congestion on jetty and if cargo stowed in more than 3 hatches.

Working Hours:

Saturdays/Wednesdays	Day Shift	0700 — 1300	
		1300 — 1500	Lunch Break
		1500 — 1700	
		1700 — 1900	On overtime
	Night shift	2000 — 2300	
		2300 — 2400	Tea break
		2400 — 0600	
Thursdays	Day Shift	0700 — 1400	
	Night shift	2000 — 2300	
		2300 — 2400	Tea break
		2400 — 0600	
Fridays	No Day Shift		
	Night shift	2000 — 2300	
		2300 — 2400	Tea break
		2400 — 0600	

MEDICAL: Port Clinic and Government hospitals available.

CONSULS: Egypt, France, Germany, Iran, India, Jordan, Kuwait, Pakistan, Qatar, Sudan, UAE, UK, U.S.A.

FRESH WATER: Available at all berths.

FUEL: Gas oil only on berths. Other fuels can be supplied by arrangement with owners Agent. Marine lubricating oils available.

SERVICES: Fresh and dry provisions from chandler. Limited availability of ship and engine room stores.

GANGWAY/DECK WATCHMEN: A Port Services Corporation watchman will be present on board throughout the stay of the vessel in port, and the vessel must provide him with food and accommodation during the stay. The same is applicable in the case of tally staff.

REPATRIATION: Is now possible if Masters give full particulars of the seamen to be repatriated by telegram at least 72 hours earlier. This also applies to embarking crew members. The 72 hours notice is not enough in the case of a Friday, or any other holiday which falls in between.

CUSTOMS ALLOWANCES: Vessels will no longer be permitted to have free use of their stores (Tobacco goods, Alcohol, etc.) whilst in the confines of the port.

On arrival in port, an allowance will be given by the Customs Boarding Officer and the surplus stores will then be placed under Customs Seal.

The allowance will be:
200 cigarettes or 50 cigars or 250 gms. tobacco.
One bottle (1 litre) alcoholic spirit.
One bottle (1 litre) wine.
24 cans beer.
Various used personal effects such as radios, cameras, etc.

Should a vessel remain in port for more than 4 days, an issue of stores will be given upon request being made to the Customs Authorities.

These Regulations also apply to ships at the Anchorage.

SHORE LEAVE: Crews are only allowed ashore between the hours of 0700 – 1900.

GENERAL:

Ships arriving at Port Qaboos:

Ships may approach Port Qaboos without a Pilot as far as the perimeter of the limits of the port. No ship shall proceed through the entrance to or from the port without the permission of the General Manager or the Harbour Master.

All ships, other than expected ships, shall be under the pilotage of a Pilot appointed by the Port Authority when under way within the limits of the port. The ship shall have rigged and ready for use a Pilot ladder of modern pattern, in good repair and provided with reliable manropes. Such Pilot ladder shall be well illuminated between dusk and daybreak. The ship shall have a boat-rope ready rigged from the break of the forecastle to abaft the Pilot ladder.

No ship shall enter or leave Port Qaboos unless her draft marks are correctly shown and clearly visible.

Every ship shall at all times when entering, navigating in or leaving the port have both anchors ready for immediate use.

Ships proceeding to berth at the port premises shall have no list and shall be trimmed upright.

Before entering Port Qaboos every ship shall hoist the following flags: The ship's signal letters. The "Q" flag, International Code, unless the Port Health Officer has previously given pratique. The "H" flag, International Code, denoting that a Pilot is onboard. The "I" flag, International Code, if the ship is carrying passengers.

Until pratique has been granted communication between ship and shore shall be made by: Flag hoist, using the International Code of signals, Morse Code, by signal light, or radio-telephone on approved frequencies, which will be promulgated for use for such purpose.

Conduct: The Master or Owner of every ship shall be held directly responsible for the proper conduct and behaviour of the crew of such ship while in the port and for strict observance of the laws of the Sultanate of Oman, particularly those laws concerning the sale, transference or consumption of any narcotic or alcoholic or intoxicating drink of any kind.

Flags: Every merchant ship within Port Qaboos between the hours of sunrise and sunset shall fly her national flag and the national flag of the Sultanate of Oman.

Repairs: The Master of any ship wishing to carry out major engine repairs or adjustments, which will affect the mobility of the ship whilst in the port shall make written application to the Harbour Master so to do. The Harbour Master shall give his permission or otherwise in writing.

Safety of ships and persons: The Master of every ship anchored or moored in the port or berthed at the port premises shall, unless the Harbour Master concede some relaxation in this port rule, at all times retain on board sufficient crew to work or move the ship.

Ships berthing and unberthing at the port premises: No person shall swim from any ship berthed at the port premises.

No person shall make fast or anchor any country craft or boat of any kind at any quay, wharf, pier or landing place or at any steps provided thereat in the port premises except with the prior permission of the Harbour Master.

Pollution: It shall be unlawful to throw, discharge or deposit, or cause, suffer, or procure to be thrown, discharged or deposited, either from or out of any ship, barge or other floating craft of any kind, or from the shore, wharf, manufacturing establishment or mill of any kind, any refuse matter or other substance of any kind or description whatever into the waters of the harbour; and it shall be unlawful to deposit, or cause, suffer or procure to be deposited, material or any kind in any place, or on the bank of any water, where the same shall be liable to be washed into such water, either ordinary or high tides, or by storms or floods or otherwise, whereby navigation within the corporate limits of the harbour shall or may be impeded or obstructed, provided that nothing herein contained shall extend to, or apply to, or prohibit operations in connection with the improvement of the port of Qaboos or the construction of public works considered necessary and proper by the Port Authority and provided further than nothing herein contained shall extend to, apply to, or prohibit the depositing of any material above mentioned in such navigable waters within such limits as may be defined, and under such conditions as may be prescribed by the proper officer of the Sultanate of Oman.

It shall be unlawful for any person, or corporation to deposit, place, or discharge into the waterways of Port Qaboos, either directly or through private or public sewers, any sanitary sewage, butcher's offal, garbage, dead animals, gaseous liquid or solid matter, oil, gasoline, residium of gas, calcium chloride, trade waste, tar or refuse or any other matter, which is capable of producing floating matter or scum on the surface of the water, sediment in the bottom of the waterways, or the odours and gases of putrefaction.

Vessels discharging ballast, oil from bilges or tanks or solid matter into the waters of Port Qaboos will be reported to the pollution control officer and be subject to a fine of R.O. 500.00 for each offence, imposed by and payable to Port Qaboos. Such fine shall be in addition to any other fines, which may be levied for the same offence by the Sultanate of Oman.

Ships Leaving Port Qaboos: Port Rules applying to ships arriving at Port Qaboos apply equally, in so far as they are relevant, to ships leaving the port.

Merchant ships shall fly the "P" flag International Code, for 24 hours before sailing from the port.

The Port Authority may refuse to give the Master of any ship outward clearance, unless and until all charges due in respect of the ship and any penalties, to which the ship or her Master are due, have been paid or secured to the satisfaction of the Port Authority.

The Working of Cargo at Port Qaboos: Ships may be permitted to discharge or load cargo in the anchorage if a berth is not available at the port premises or if in the opinion of the Port Authority the ship's cargo is more suitable for handling to or from barges or lighters.

The Master or Owner of any ship shall be held responsible for any loss or damage arising from careless or improper slinging of cargo onboard such ship.

Any cargo, cargo-handling equipment or ship's gear, which may be dropped overboard shall at once be reported by the Master or appointed officer to the Port Authority and shall be immediately recovered by the ship's personnel if it is reasonably possible so to do. Failing this, it may be recovered by the Port Authority at the ship's expense. The Port Authority shall not be responsible for any damage to or loss of cargo, equipment or gear so recovered.

The Master of every ship discharging or loading cargo in the port, whether at anchor or berthed alongside shall provide drinking water for all cargo handling labour and all other persons appointed and directed to be on board such ship in connection with the discharge or loading of cargo.

If the labour or transport allocated or engaged for the purpose of landing, loading or transshipping cargo from or to any ship is not fully continuously employed by reason of a fault or action attributable to such ship, the expenses incurred thereby shall be paid by such ship.

In the event of any accumulation of cargo or goods upon the quay or jetty or in a lighter for any cause that may appear reasonable to them, the Port Authority may require the ship discharging such cargo or goods to suspend or reduce the rate of discharge of such cargo or goods.

The Port Authority may refuse to permit cargo to be landed from any ship until suitable shed or open storage space or other accommodation is or becomes available for such cargo.

Delivery of cargo or goods shall not be deemed to have been made to the Port Authority until such cargo or goods have been brought into the port premises and until the Port Authority accepted delivery of such cargo or goods and have issued an official receipt therefor to the Master of the ship discharging such cargo or goods or to the ship's Agent or to any other person duly authorised so to do, conveying such cargo or goods to the port premises.

AUTHORITY: General Manager, Port Services Corporation Ltd., Muscat.

AGENT: Gulf Agency Co. (Oman) W.L.L., PO Box 3740, Ruwi, Sultanate of Oman. Tel. Mutrah 734888, 772703. After Hours 702249. Telex 3284 ("Gacship MB"). Cables "Confidence", Muscat. VHF Channel 16. Call sign "Confidence Muscat".

PORT RAYSUT (Salalah): 16.56 N. 54.01 E.

PORT LIMITS: The water limits of the port are bounded by the parallels of 16° 55′ 30″ N. and 16° 56′ 50″ N., and by the meridian 54° 01′ 30″ E. to the Eastward. To the West the limit follows the coastline from its Northern interception with the headland of Ras Raysut.

The land limit to the port area follows the line of the outer security fence across the neck of the Ras Raysut headland.

DOCUMENTS: See "Port Qaboos".

PILOTAGE: Compulsory, except for vessels less than 100 n.r.t., Port Authority craft and vessels of the Oman Navy.

ANCHORAGES: Anchorage positions at the present time will be given to all vessels upon reporting by VHF radio. Anchorage positions are set with 0.5 miles between each ship in a minimum of 10 m. of water for large vessels, less depth of water as required for coaster vessels. All ships are anchored per their draft in consideration for maximum safety.

RESTRICTIONS: Due to the fact that the Port is presently undergoing major expansion, ships are requested not to enter the anchorage after darkness. No ship movements are permitted after darkness except in case of an emergency. Vessels arriving in the area after nightfall are requested to anchor no nearer than 2 miles from the Eastern breakwater.

The expansion programme which dictates these restrictions is due for completion in March 1980 and until that time all restrictions will remain valid.

MAX. SIZE: At the present time the maximum size of vessel permitted to enter the port for discharge at the berth is: draft, 18 ft. and length, 300 ft.

Vessels arriving under these conditions of max. draft and length will be brought to the berth only during high tide. Any larger size vessels will be handled at anchorage using barges. Barges are provided free of charge to vessels arriving on liner terms, all other vessels will negotiate barge charges.

HEALTH: Quarantine procedures are followed and all ships upon arriving must fly flag "Q" until completion of quarantine procedures. Public health requires certificates for smallpox, cholera and yellow fever.

RADIO: For advance ETA data the port must be notified via Agent. For more accurate ETA within 3 to 4 hours VHF Channel 16. Channel 16 has range of about 60 to 70 miles depending on weather. Call: Port Raysut Anchorage Control.

VHF: VHF radio has a range of about 60 to 70 miles depending on weather conditions. The radio station is manned from 0800 to about 2300 hrs. daily. All ships arriving must contact the Port on VHF Channel 16, call sign "Port Raysut Anchorage Control". The operator will require the following information:

1. Ship's name – spelt out.
2. Maximum draft.
3. Overall length of vessel.
4. Type of cargo being delivered.
5. Anchorage time.

After formalities are completed on Channel 16, all vessels will be directed to switch on to VHF Channel 12 for Port movements and operations. This Channel is the Internal Port Control Channel for Pilots, Tugs and enquiries to the Port or Shipping Agents. VHF Channels 10 and 6 are also available for special usage or alternative Channel for 12 when required.

Upon completion of cargo discharge all vessels must call on VHF Channel 16 and report to anchorage control their departure time and next port of call. The contact with the port anchorage control at this time is very critical as the contractor is doing under water blasting and the operator of the VHF radio is kept informed of the blasting schedule.

RADAR: None available in the port at this time.

TUGS: Two workboats are in use in the port. They deliver the Pilot to the vessel and accompany the vessel into berths. The workboats are on VHF Channel 12.

BERTHING: There are two berths available at present. Berth No. 1 is 250 ft. long (being extended) and can accept a vessel of 300 ft. in length with the max. draft of 18 ft. on a high tide entry. Berth No. 2 is 350 ft. long but will only accommodate vessels of 16 ft. max. draft on high tide entry. No ships are berthed at low tide. All vessels operating at the berths are discharged by shore equipment, exceptions to this do arise but not as a general rule. All vessels operating in the anchorage must use ship's gear and must provide their own winch operators.

CRANES: There are 5 mobile cranes in the port operating in the range of 2 to 5 tons. There is one mobile crane rated at 15 tons. There is one mobile crane rated at 20 tons. There is one mobile crane rated at 30 tons. There is one mobile crane rated at 70 tons. The cranes are placed at any berth as requirements become necessary.

BARGES: 3×350 ton barges are used by ocean-going vessels in deep water anchorages. Vessels arriving under liner terms receive free barge facility. Vessels arriving under charter, terms are negotiated as to charges for barge facility.

SPECIALIZED FACILITIES: There are no special facilities at this time. Ro/Ro services are carried out in the existing port at present. However such vessels must meet the standard requirements for entry to the berth. There are no bulk handling facilities.

BRIDGES: None.

STEVEDORES: Arrangements must be made through the Agent for max. notification of arrival to arrange gangs. Minimum notification 24 hours. All cargoes handled. Normal working hours from Saturday to Wednesday 0700 to 1500 hrs. Thursday from 0700 to 1300 hrs. with no lunch break.

Working hours are subject to change during the month of Ramadhan.

Overtime would be charged to hours worked outside the normal working hours. Overtime will be worked at the request of the Agent and will be worked on Fridays and public holidays at special request.

MEDICAL: Agents handle all medical matters. A hospital is available in the town of Salalah (17 miles away). Also see "Health".

TANKERS: At this time closed to tankers. Other than those in present service.

FRESH WATER: For vessels at berths, Agents must arrange for tank truck delivery from Salalah. For ships at anchor there is no means of fresh water delivery at this time.

FUELS: Available to ships at the berth, must be arranged by the Agent.

FIRE PRECAUTIONS: Nothing at this time beyond standard precautions.

CONSULS: None available at present.

REPAIRS: No facilities at present.

DRY DOCKS: None available.

SURVEYORS: Lloyd's representative is Oman United Agencies in Salalah.

GANGWAY/DECK WATCHMEN: Not required except as deemed necessary by the Captain of the vessel and then he must supply his own.

HATCHES: Opening and closing hatches is normally done by the crew but arrangements may be made with the port for provision of this service. Agents can advise.

CUSTOMS ALLOWANCES: Usage and sale of tobacco and all alcoholic beverages are not permitted to shore based personnel. Notices of special changes in the rules are provided by the Agents upon arrival.

CARGO GEAR: Normally handled by shore equipment and shore gear. Any special lifting equipment required must be provided by the vessel. Ships in the anchorage are normally expected to supply all gear required. The port has rental gear for those vessels requiring same.

REPATRIATION: This is not normally permitted at this port but on special consideration arrangements may be made by the Agent for this service. Crew changes may not be effected at this port at the present time.

AIRPORT: Salalah Airport is serviced by special charter flight from Gulf Air on a once daily schedule. The special schedule is operating between Salalah and Muscat. From Muscat, international flights are available.

TIME: Time local is GMT plus 4 (Delta Time).

HOLIDAYS: All Muslim holidays are observed. Working hours are reduced during the period of Ramadhan. Special National days celebration is held from 17th to 21st November each year. Working of overtime may be arranged during most of the holiday periods, Agents can advise.

POLICE/AMBULANCE/FIRE: The port has police available at the port at all times. Fire and ambulance service must come from Salalah at this time. The port has the only telephone service and the police located within the port also maintain telephone service. Required numbers are familiar to all persons in these two areas.

TELEPHONES: For any long distance calls Omantel maintains office in Salalah where calls may be placed and paid for. For local calls the port will permit the use of port phone on a limited basis.

SERVICES: None available at this time.

SHORE LEAVE: Captain, First Officer and Chief Engineer are permitted restricted shore leave but all other members of the crew are restricted to the ship or port area.

IDENTIFICATION CARDS: Seamans book or passport are sufficient for those persons going ashore.

REGULATIONS: No vessel shall enter the port area unless authorised by the Harbour Master. The Harbour Master may at his discretion refuse to allow vessels, with the exception of vessels in distress, to enter the port, and may order from the port any vessel with the exception of vessels unfit for sea, which does not have business within the port, or is in breach of these Regulations.

No vessel shall anchor, or weigh anchor or move within the port area except when and where required by the Harbour Master.

No water ballast which is not free from oil or other harmful contaminants, shall be discharged into the waters of the port area. In case of the pumping of bilges or pollution by oil or harmful contaminants into the waters of the port area, the vessel will be responsible for any fines imposed by the Port Authority and any compensation or other damages.

Should fire break out aboard any vessel the Master should make an immediate signal either by a continuous sounding of long or short blasts on the ship's whistle or siren or by ringing of a fire bell.

In cases of adverse weather it is the sole responsibility of the Harbour Master to decide whether the sea conditions are suitable for handling cargo with barges in the Anchorage or whether the day will be declared a "Weather non-working day".

Masters shall be responsible for the adequate provisions of safety equipment and lights on board whilst cargo is being handled.

Conveyance of alcoholic liquor, other than manifested cargo under Customs supervision, from any vessel to the shore or from one vessel to another is prohibited.

No unauthorised person may enter the port area. Visitors to vessels are prohibited except by permission of the Harbour Master.

Ship's personnel and passengers are not permitted ashore except by permission of the Immigration Authorities and the Harbour Master.

Every merchant vessel in port shall fly her national flag, and the national flag of Sultanate of Oman, between sunrise and sunset.

DEVELOPMENTS: The port is at the present time undergoing major expansion which is expected to be completed in March, 1980. Due to this expansion programme day to day alterations must be made in the ports decisions regarding vessels and their cargo. The port will keep all vessels in the area advised by VHF radio as to any changes or movements required. It is important that at this time all vessels in the port or anchorage areas maintain a radio watch on VHF as instructed upon their arrival.

GENERAL: See above. The port operates on a year round basis today with the exception of vessels requiring barging. All barging is closed from mid-June to late September depending on the sea state. Coaster vessels are berthed on a year round schedule but must be prepared to leave the berth under hurricane conditions.

SHIPMASTER'S REPORT: May 1978.

Best Anchor Position: Easternmost rock off Ras Risut bearing 195°T×1 mile for vessels up to 30 ft. draft (B.A. Chart No. 3784).

Documents: Derat Certificate. Last port clearance. Vaccination list. (Bond not sealed).

Pilotage: Only vessels up to 300 ft. length with maximum draft of 17 ft. are berthed alongside. Pilotage is compulsory.

Radio: Send ETA, draft, LOA, g.r.t., n.r.t., cargo to discharge, last port, to: General Manager, Port Raysut, Salalah, Sultanate of Oman, giving 48 hours, 36 hours, 24 hours notice.

Barges: There are 3×250 ton barges, into which cargo is discharged at anchorage. Two more such barges are expected by end of 1978. These are flat top dummy barges on which cargo is stowed by fork-lift. Fork-lifts are available at anchorage.

Labour: A gang consists of 10 men. They are government employees. Presently port is short of gangs. Vessel must supply own men to operate winches.

Fresh water: Available only at berth. Supplied by trucks at the rate of USD 7.5/ton. NOT available at anchorage.

Provisions: Presently the port Quarantine Officer does shipchandling. However it is better to buy the provisions from a supermarket.

Shore Leave: Crew can go ashore from anchorage either by shore tugs which tow the barges or by ship's lifeboat. Must carry passports/CDCs. Taxis available to go into town of Salalah which is at a distance of 25 km.

Airport: Daily flight to Muscat.

Telex-Telephone-Cable-Posts: Facilities available by "Cable & Wireless" offices.

Hospital: Very good.

Workshop: Nil.

Fuel Oil: Not available.

General: Cargo is not worked during the monsoon period due to heavy swell, i.e. from 1st week of June to end of September.

Cost of barges at anchorage is 1 Rial per ton of cargo loaded. Such charges to be paid by the ship or her Agent prior to ship's departure.

Presently 6 berths are under construction which are expected to be ready by end of 1980. These will accommodate vessels up to 32 ft. draft.

AUTHORITY: Directorate General of Communications, Salalah, Sultanate of Oman.

AGENT: See "Port Qaboos".

Pakistan

KARACHI: 24.49 N. 66.59 E.

DOCUMENTS: *Required before vessel's arrival:*
2 copies Freight Manifest.
2 sets Bills of Lading.
3 copies Stowage Plan.
2 copies Passenger Manifest.
3 copies Cargo Manifest.
3 copies Hatch Lists.
1 copy Exception Lists.
6 copies Passenger Lists.
With vessel:
2 copies Cargo Manifest.
Last Port Clearance Certificate.
6 copies each Passenger List, disembarking and transit.
2 copies List of favour parcels.

The following special Pakistan forms are brought on board by Agent for completion on arrival:
2 Customs Arrival Reports.
2 Opium and Dangerous Cargo Certificates.
2 Ship's Currency Lists.
6 Deck Cargo Certificates.
1 Company's Arrival Report.
1 Ship's Crew Advance (if required).
1 Expiry date of Ship's Certificate.
1 Same Bottom or Intransit Cargo.
1 Water Indent.
*10 Crew Lists.
3 Stores Lists.
3 Property Lists.
7 Cargo Gear Information Forms.
*If this is ready prior to arrival, please attach to this form.

Metric weights and measures to be used on Particulars of Cargo, Tonnage Certificates, Stevedoring Bills, Manifests and Bills of Lading.

PILOTAGE: Pilotage is compulsory for ship of 200 n.r.t. and upwards. Pilot boards at the Outer Anchorage.

Vessels are piloted day and night, subject to tides, length and draft, to berths lying on the East and West of the fairway, which is 4.27 miles long. Pilotage distance is about 5 to 6 miles.

ANCHORAGE: Outer Anchorage where ships await berth safe except during the S.W. monsoon from mid-May to September. During monsoon no anchorage is recommended. Vessels should anchor a safe distance outside the breakwater within Lighthouse bearings 045° and 025°. Depth of water at the anchorage is about 9 fathoms.

RESTRICTIONS: Datum depth is 27 ft. Vessels with a draft in excess of 32 ft. are not permitted to enter Karachi due to varying depths at berths, and silting in the ship channel.

Berthing at any time, except vessels with bridge aft which permitted daylight only.

Sailings permitted during flood tide only. Tankers with LOA over 525 ft. Permitted to sail on flood tide during daylight hours only. Vessels with bridge aft permitted to sail on flood tide during daylight hours only.

MAX. SIZE:

	Length	*Draft*
Bulk carriers and general cargo (dry cargo)	945 ft.	32 ft.
Bulk oil tankers, white oil product	550 ft.	32 ft.
Bulk oil tankers, black oils.	650 ft.	32 ft.
New oil pier No. 4	800 ft.	32 ft.

HEALTH: The Port Health Authorities give automatic clearance on receipt of a "clean" standard quarantine message and this will be conveyed by the Pilot. However, ships from Yellow Fever areas must be cleared during daylight hours by the Port Health Officer on arrival alongside. On sailing to ports outside India and Pakistan, a medical inspection takes place on the day before sailing. It is, in theory, necessary for a member of the crew to be present at this inspection, although usually the inspection is only a formality. All vessels required obtain Immigration Clearance on arrival.

All vessels which have touched any port or ports between Port Sudan and Durban, on the East Coast of Africa, including these ports, are considered "suspected" vessels on account of Yellow Fever and Jigger and may not have communication with the shore till cleared at berth by the Port Health Officer, who attends only between sunrise and sunset, except in special circumstances. The incubation period for Yellow Fever under the rules is given as 9 days, but vessels arriving later than 9 days are still not free from quarantine because there is no incubation period for Jigger.

RADIO: Port Authorities equipped with VHF radio-telephone, calling Channel 16, working Channel 12. Control Station call sign "Manora Pilot Control".

Vessels should establish radio contact with control station as soon as they are within VHF range.

Use of Channel 12 is restricted to the following: Ships while entering harbour are to maintain watch on Channel 12 as soon as Pilot boards. Ships in harbour scheduled to sail are to keep a listening watch half an hour before sailing till their clearance from the port.

"Intercommunication with the ships, other than Pilot Control, at outer anchorage or ships in harbour on Channel No. 12 and 16 is strictly prohibited. The Manora Pilot Control Station is equipped with multi-channel VHF Radio Telephone sets which are operating on International Maritime Channels 8, 9, 11, 12 and 16 subject to above restrictions."

TUGS: There are five diesel tugs all owned by Port Trust. Four tugs have bollard pull varying from 10 to 18 tons and one tug has 27 tons bollard pull.

Towage inside the harbour is rendered by Port Trust on signal from Pilot. Towage is not provided outside the breakwater except in very special circumstances at the discretion of the Deputy Conservator, subject to weather permitting and availability of tugs on special terms and conditions.

BERTHING: There are 17 berths at East Wharves, total quayage 8,622 ft. Berth Nos. 1 to 17 are on a concrete quay wall of the latest type. All berths are rail-served. Berth lengths vary from 470 ft. to 550 ft. Available depths vary from 26 ft. to 31 ft. There are 8 berths at West Wharf and their length varies from 550 ft. to 700 ft. Depths available vary from 29 ft. to 31 ft.

There are three Bulk Oil Piers having length of 425 ft., 644 ft. and 750 ft. which can accommodate tankers of overall length between 525 ft. and 650 ft. Also see "Tankers".

Moorings: Three moorings of 700 ft. each and one Lash Mooring of 1,000 ft. have been laid and are commissioned for accommodating the vessels of sizes between 600 ft. and 850 ft. respectively.

STEVEDORES: Working Hours: Monday through Thursday and Saturday, day shift: 0730–1130 and 1230–1630 hrs. On Fridays day shift: 0730–1230 and 1400–1630 hrs. Mondays through Saturday, night shift: 1900–2300 and 2300 to 0330 hrs. next day.

Overtime periods: 0330–0630, 1130–1230, 1630–1830 hrs.

TANKERS: Mineral oils discharged at the Bulk Oil Pier, 3 berths, and at West Wharf berth 20. Heavy grades may be discharged at the steamer wharves but dangerous petroleum only at the Oil Pier.

Vegetable oils are handled at both the terminals mentioned above, and at East Wharf berth 9.

New Oil Pier No. 4: Completed 1978. Max. LOA 800 ft., max. beam 100 ft., max. loaded draft 32 ft., max. size 75,000 d.w.t. and 95,000 tons, max. gross displacement.

Slop reception facilities: Not available.

Also see "Berthing".

FRESH WATER: Fresh water is available at East and West Wharves and at Oil Piers. The ships at Moorings are supplied fresh water by barges.

FUEL: In addition to coal, 3 grades of petroleum are available – furnace oil, light diesel oil and high speed diesel oil. Furnace oil can be supplied by pipe-line at all berths. Light diesel only at berths 1 to 4. At other berths supply is made by tank wagons and lorries. Large quantities can be supplied by pipe-line at the Bulk Oil Pier only.

REPAIRS: Repairs can be carried out at the anchorage except in the monsoon season. 2 ship repair jetties are available in the port. In addition, Karachi Shipyard and Engineering Works Ltd. provide all kinds of repair and ship-building facilities.

DEVELOPMENTS:
(i) New Railway Yard for serving West Wharf berths is under construction.
(ii) A new road bridge serving 17 East Wharves Berths is under construction in replacement of the existing century-old Napier Mole Bridge connecting Keamari with the City.
(iii) New high throughput storage facilities have been added to the Port in 1976 comprising of 16,000 tons Transit Sheds at Berth No. 23, and 8,000 tons Transit Sheds at Berth No. 3.

Port Qasim: New port under construction 30 miles South-east of Karachi. The first phase of Port Qasim, to be completed in 1979-80. It includes construction of 7 multi-purpose berths and 1 steel mill terminal to handle iron ore and coal for the Karachi Steel Mills, and dredging of the approach channel to take vessels of up to 50,000 d.w.t.

The first 4 multi-purpose berths are expected to be available within 2 years to take ships of up to 50,000 d.w.t. The second phase of the port will be completed in 1984-85 and will add 12 high throughput berths.

HOLIDAYS: Eid-ul-Azha; Muharram; Defence of Pakistan Day (23rd March); Eid e Miland un Nabi; Independence Day (14th August) Defence of Pakistan Day (6th September); Jamat-ul-Wida; Eid-ul-Fitr; Anniversary of Death of Quaid-e-Azam; Christmas Day (25th December).

TIME: GMT plus 5 hours all year round.

AIRPORT: Karachi Airport, 7 miles from city. International connections to all parts of the world.

SHORE LEAVE: Shore passes are granted by Immigration Authorities when they first go on board and must be returned on departure of the vessel. These passes permit entry/exit to the docks until 11 p.m. This latter regulation is not strictly enforced.

Indian crew are not allowed ashore except in emergency. An Immigration policeman will remain on board in port where Indian crew are carried. This policeman will ask for some sort of accommodation. This need only be given if it does not cause inconvenience to the ship.

GENERAL: The Karachi Port Authorities advise that in order to avoid delays to ships requiring abreast berths for working cargo, it has been decided not to berth more than 1 vessel for receiving supplies of fresh water and bunkers. Ships due to call at Karachi are therefore *recommended to arrive with sufficient fresh water and bunkers to last for two or three weeks from the date of arrival at the outer anchorage.*

AUTHORITY: Karachi Port Trust.

Panama

AGUADULCE: 08.14 N. 80.30 W. (See Plan Book)

LOCATION: The port of Aguadulce is located 4.5 km. from the coast on the Palo Blanco inlet in the Bay of Parita, Pacific coast of Panama.

The port consists of a single quay 70 m. long used mainly for shipment of bulk sugar and molasses to ports in the U.S.A.

DOCUMENTS: The same documents are required and the same procedures are followed as for Almirante, Armuelles and Bahia las Minas. See "Almirante".

PILOTAGE: There is an official pilotage service with Pilots available 24 hours a day. Pilotage is compulsory for all vessels greater than 150 tons g.r.t., wishing to enter and leave the port. To request the Pilot, the vessel's Agent must make arrangements with the National Port Authority. The pilot station is in Aguadulce. Vessels can also ask for Pilot by calling the National Port Authority on Channel 12 VHF.

The Pilot launch is blue, with a white superstructure and flies a blue pennant. Vessels can communicate with the launch on Channel 12 VHF.

ANCHORAGE: Vessels must await the Pilot at the anchorage located near the sea buoy which is painted white with a white light flashing every 2 seconds. Position of the buoy is Lat. 08° 13' N., Long. 80° 25' W. Depth of water at the buoy's location is 22 ft., average low tide, and in places one mile to the N.E. it increases to 30 ft.

RESTRICTIONS: The port is on an inlet. It has an access channel 13 km. long from the sea buoy. The width of the channel varies from 200 m. in its widest part down to 75 m. at its narrowest.

The channel is marked by buoys which are lit and in accordance with the uniform lateral signalling system, and coming from the sea the buoys on the starboard are red with even numbers and red light and those to the port side are black with odd numbers and white lights.

The port is tidal and vessels may only enter and leave on the high tide. At low water the access channel has depths of less than three feet for which reason the max. draft permitted in the port is 19 ft. with 18 ft. high tides. Furthermore, inside the inlet there are fairly sharp curves which do not permit entry of vessels greater than 100 m. overall length and 2,500 g.r.t. tons. In the future it is planned to dredge the access channel to provide minimum depths of 10 ft. at low tide.

HEALTH: As with other Panamanian ports, the doctor boards the vessel with the other officials of the reception commission. If there is any infectious illness on board, the Captain must communicate this to the Port Authority by VHF Channel 12.

VHF: The Port Authority has VHF equipment. Call on Channel 12. It operates throughout the day.

TUGS: None available.

BERTHING: There is a main quay 70 m. long with an average low water depth of 10 ft. There is also a small quay 30 m. long which is not used. The quay has a fender system. There is also a dolphin type quay for shipment of molasses, and a 50 m. berth for sugar carriers, which has automatic sugar loaders.

No loading equipment available. Unloading must be by ship's gear. There are belt type sugar loaders. Mobile cranes can be contracted in Aguadulce.

There are two storage tanks for molasses of 1,000,000 and 500,000 gallons capacity respectively.

There are also open air facilities for storage of general cargo.

STEVEDORES: Loading and unloading work is carried out by a gang of local workmen contracted by the ship's Agent, via their representative.

FRESH WATER: Available via tanker lorries. No supply via pipes in the port.

FUEL: None available.

POLICE/AMBULANCE/FIRE: Available in the town of Aguadulce 5 km. from the port.

REPAIRS: No facilities.

PROVISIONS: Supplies available in Aguadulce.

TIME: GMT less five hours.

CONSULS: None; the nearest are in Panama City 193 km. from the port by road.

MEDICAL: Hospital in Aguadulce.

CUSTOMS ALLOWANCES: See "Almirante".

TELEPHONES: Telephonic communication from the port by public telephone by micro-wave to any part of the world. No facilities for phones on board vessels.

DENSITY: Approximately 0.9971 gm/c.c. at 85° F.

SHORE LEAVE: No restrictions.

REPATRIATION: There are Immigration Officials on the quay. Repatriation presents no difficulty.

COMMUNICATIONS: The port is connected to the town of Aguadulce by an asphalt highway 5 km. long.

Aguadulce is connected to Panama City by road, the capital being 193 km. distant.

AIRPORT: At Aguadulce there is a small airstrip. There is an airport at Chitre 60 km. from Aguadulce and where a local airline effects two trips between this town and the airport of Paitilla in Panama.

AUTHORITY: National Port Authority.

ALMIRANTE (Bocas del Toro): 09.18 N. 82.23 W. (See Plan Book)

LOCATION: Located in Almirante (Bocas del Toro) Bay, on the N.E. end of the Atlantic coast of Panama.

The Port of Almirante consists of a pier 305 m. long used for loading bananas. The port is used principally by reefer vessels coming from Europe and bound for European ports.

The port was built by the United Brands Company and later transferred to the Government. Currently, it is rented by United Brands but is administered by the National Port Authority.

DOCUMENTS:

2 General declarations.
1 Clearance from previous port.
5 Cargo manifests or declaration that no cargo is carried.
2 Crew lists.
4 Passenger lists or declaration that no passengers are carried.
2 Supplies declarations for crew or declaration that there are no supplies.
2 Crew personal effects declarations.
1 Maritime Health Declaration.
2 Mail lists.
1 Bill of lading (1 copy of each).

The above documents must be presented by the Captain of the vessel when the reception commission boards the ship, this commission comprising the following: Port Authority, Customs, Immigration, Health (Doctor), Vegetable Health and National Guard.

Once the reception commission finds the documents to be correct, free pratique is given enabling the vessel to commence operations.

PILOTAGE: Pilotage is compulsory for vessels entering Almirante.

The service is provided by a private Pilot who has his station in the town of Bocas del Toro. To request his services, the Agent must make arrangements with the Port Administration. Vessels using Almirante frequently take the Pilot on board in the Bay of Almirante, in front of the town of Bocas del Toro. The pilot cutter is blue with white superstructure, and has VHF radio. To communicate with the cutter, call up on Channel 12 VHF.

In January 1979, the Port Authority will establish an official pilotage service, and all arrangements for the services of the Pilot must be made with the Port Authority. For vessels arriving for the first time in Almirante, they must anchor outside the entrance of Bocas del Toro aligned at 150° to 180° to Toro Point and 8 cables off. At this point, they must await the Pilot.

ANCHORAGES: Within the Bay of Almirante there are good locations with depths up to 90 ft.

In front of the quay there is space to anchor with depths of 50–60 ft.

RESTRICTIONS: The entrance channel has a minimum depth of 30 ft. and is marked by buoys and light floats as indicated on the Port Nautical Charts. Also see "Developments".

Shipmaster's Report: The water depths on passing Bocas del Toro are greater than 30 ft. as you follow the charted course lines.

Proceeding at a reduced speed consisting of "dead slow" and "stop", with enough manoeuvrability, to minimise the vessel's pitching, you can enter or leave the Bocas del Toro with a draft of 26 ft. without any difficulties.

On entering and leaving I was forced by cargo circumstances to berth with a 26 ft. deepest draft, and never had less than 10 ft. below my vessel's keel (deepest section), at low water.

MAX. SIZE: There are no restrictions as to beam and size of vessel; but as far as draft is concerned this must not exceed 30 ft.

Bocas del Toro can be entered and left with drafts of 29 ft. without difficulty.

HEALTH: The doctor on boarding the vessel with the Reception Commission receives his documents and declares free pratique.

In the event of illness on board, Agent must be advised by VHF radio and this will be passed on to the doctor.

RADIO: Cables for and from the Agent are sent by radio operated by Tropical Radio Telegraph Co. The Port Authority has VHF and SSB equipment. The SSB equipment operates on the call-up frequency of 7447.5 kHz.

VHF: VHF communications can be made on Channel 12 at a distance of 30 miles from the port. Furthermore, United Brands Co. has VHF equipment which receives calls on Channel 16.

TUGS: None available.

BERTHING: A banana quay 653 ft. long with a single mooring frontage and with 4 automatic banana loaders. It is recommended that vessels moor on the starboard side. Also there is a general cargo quay 350 ft. long which has pipes for discharge of refined oil. The max. depth at the quays is 30 ft.

STEVEDORES: Loading work is carried out by the local Workers Union. The Agent must make contact with United Brands Co. for these workers.

FRESH WATER: Available throughout the year. The pumping capacity is 2–3 t.p.h.

FUEL: Not available.

REPAIRS: No facilities for repairs to vessels.

PROVISIONS: Obtainable in the local market; but it is preferable for provisions to be obtained in Colon.

TIME: GMT minus 5 hours.

CONSULS: Costa Rica, El Salvador, Honduras, Nicaragua.

MEDICAL: A modern hospital is available in Changuinola 20 kms. from Almirante. Almirante also has a small hospital.

CUSTOMS ALLOWANCES: The customs offices are in the port vicinity. Permitted quantities are 2 packs of cigarettes of 20 packets each per crew member and 2 bottles of whisky or other alcoholic drink per crew member for consumption on board.

TELEPHONE: There is a micro-wave telephone service to Panama and other places in America. The Port Authority has telephones in their offices, but there are none available for installation on vessels.

OPENING/CLOSING HATCHES: Carried out by stevedores.
DENSITY: 1.022 gm./cu.cm.
SHORE LEAVE: No restrictions.

POLICE/AMBULANCE/FIRE: Available in Almirante.
REPATRIATION: Can be effected without difficulty.
AIRPORT: There is a small airport at Changuinola 21 kms. from Almirante, which connects the province of Bocas del Toro with the rest of the Republic. There are 2 flights a day between the airport of Changuinola and Tocumen in Panama City. Changuinola is connected with Almirante by railway.

DEVELOPMENTS: It is planned (for the end of 1979) to reposition the buoys marking the port entrance channel for the purpose of obtaining a minimum depth of 32 ft. along the whole of the port access channel.

SHIPMASTER'S REPORT: October 1978.
Position: 29° 17.4′ N., 82° 23.5′ W.
Pilot: Compulsory. The boarding position of the Pilot varies, however he usually boards in the region of No. 10 Beacon. If he should be moving another vessel at the time of arrival, he requests vessel to proceed towards the berth and he will board the vessel about 1 mile off the berth. Occasionally he will board vessel as far out as Cape Toro. Notice of arrival is required 24 hours in advance via the Chirique Land Co.
Restrictions: Vessels able to enter and leave at any stage of the tide. It is not recommended to manoeuvre in hours of darkness as the lights on the buoys are not reliable in the Bocas Del Toro Channel. Max. size vessel at the Banana berth is 650 ft. and the deepest draft 26 ft. Bocas Del Toro has a buoy channel least depth 30 ft.
Health: Quarantine officials require 24 hour notice of arrival.
Tugs: No tugs available.
Radio: NBA (Balboa); WAX; WNU (Slidel).
VHF: Pilot and Port Authority on VHF Channel 16. Agent on Channel 16 and 14.
Berthing: The Banana berth has 4 elevators. Distance from Bocas Del Toro to the berth is 17 miles. Max. size of vessel that can safely berth is 650 ft. Deepest draft is 32 ft. alongside, however there is a 27 ft. patch about 200 ft. off the berth. (See Plan Book). Draft limited to a max. of 26 ft. The channel from sea to berth is said to be swept to 30 ft. The nature of the bottom at the berth is sand and mud with occasional patches of coral.
Consuls: Honduras, El Salvador and Costa Rica.
Services available: Fresh water (however pressure very low during the day); Fresh provisions; Repair facilities (Small); Machine shop; Small air strip; Doctor and hospital.
General:
Bocas del Toro Channel: Prior to arrival confirm with Chiriqui Land Co. (Agents) that all buoys are in position and none missing. Channel is swept to a depth of 30 ft. but as can be seen on American Chart 28044, just North of No. 5 buoy a 25 ft. patch exists and the opposite side a 28 ft. patch. "Salen" confirmed max. safe draft is 26 ft.

On occasions quite a heavy swell is present causing vessel to pitch, on the way out it is usually noticable about No. 5 Buoy.
Pilots: There are 3 Pilots, all live at Bocas. They use a small open type "dug out" boat with an outboard engine. Reputed to do 9 knots. They usually board off No. 10 beacon. Our Pilot required the port accommodation ladder. The others use the pilot ladder. They leave at the same place near beacon No. 10.
Mooring at Banana Pier: Morning time is usually the best, quiet, no wind, but by mid-afternoon it is usually blowing off the berth. Difficulty arises as there are no tugs and no mooring boats to take the lines. Good idea to have some extra light heaving lines ready with weights on the end.
Cargo: If Almirante is the last port for loading insist on filling No. 1 hatch before No. 5 (have only got 4 elevators). This guarantees any cartons "shut out" or rejected by the quality control will leave No. 5 light and not No. 1. This helps the draft situation.
Cargo gear: Have derricks lifted ready and the starboard banana lids open all the way down. Leave the port ones closed.
Fresh Water: Usually none available November to April, but the rest of the year it is about 2 t.p.h. They had a booster pump but at present it is burnt out. During the day the pressure is not good enough to reach the tanks, night time is a little better. Good idea to arrive with starboard side empty as they do not have enough hose or pressure to reach the port side.
Contract Work: Contractor Mr. Julio Wood. Very good for engine room scavenge spaces. Only average for painting on deck as they are not used to stages. They have no paint floats. Rate U.S. Dollars 1.50 per man/per hour. Foreman 2 Dollars. Vessel also has to pay 13% social security.
Recreation: A trip to a banana plantation can be arranged via the office, also includes the packing section and Banana Puree factory. Leave the ship at 0700 hrs. Train goes at 0730 hrs. to Farm 8. Had party of 16 and met by school bus. The club house has golf course, tennis courts and large swimming pool. Worth taking swimming gear.

In Almirante, crew are made welcome at the "Lions Club" which has a Ten Pin Bowling alley. Film shows on Thursdays and Saturdays all free of charge.

AUTHORITY: National Port Authority.

BAHIA LAS MINAS (Colon): 09.24 N. 79.49 W.

(See Plan Book)

LOCATION: Situated 11 km. to the East of the entrance of the Panama Canal on the North Coast.
DOCUMENTS:
2 General declarations.
1 Clearance certificate from last port of call.
5 Cargo manifests, or declaration to the effect that no cargo is carried.
4 Passenger lists, or declaration that no passengers are onboard.
2 Supply lists, or declaration that no supplies are carried.
2 Lists of Crew's personal effects, or declaration that none carried.
1 Maritime health declaration.
2 Mail lists or declaration that no mail is carried.
2 Crew lists.

PILOTAGE: Compulsory for all vessels entering the port and is offered by the Pilots of the Marine Department of the Refineria Panama S.A.

Vessels must await the Pilot beyond buoy No. 1 painted white, with a flashing white light every 3 seconds. The best position for anchoring is near buoy No. 1 in position Lat. 09° 25′ 30″ N. Long. 79° 49′ 35″ W. where there is a depth of 63 to 66 ft.

Vessels wishing to enter the port may call up the Port Authority on VHF Channel 12 or Refineria Panama on VHF Channel 16.

The Pilot craft has a black hull and white superstructure. When weather conditions are bad, a tug is used for boarding vessels.

The boarding ladder is placed in accordance with conditions of the sea.

Vessels may also ask for a Pilot via their Agents who will communicate the request to Refineria Panama. In this case, they must give an ETA 12 hours in advance.

RESTRICTIONS: The port of Bahia las Minas is mainly an oil port, specialised in importing crude oil and exporting refined products, being operated from an oil aspect by Refineria Panama S.A., and administered by the National Port Authority.

Apart from the tanker quays, there is a small quay for handling general cargo, length 90 m. This quay is administered and operated by the National Port Authority. The access channel to the port has a width varying from 300 m. in its widest part to 100 m. in its narrowest part, and a minimum depth of 40 ft. at the tanker quays. However, the general cargo quay can only take vessels of up to 23 draft. Tidal variation in this port is less than 1 ft., and so there are no restrictions for entry and leaving relating to tides.

The port access channel is marked with light buoys positioned in accordance with the International Buoy System, i.e. coming from the sea, buoys painted red with red light on the starboard side, and buoys painted black with white light on the port side.

MAX. SIZE: The port can be used by vessels up to 240 m. LOA at its tanker installations and their draft may not exceed 40 ft.

The general cargo quay can be used by vessels up to 152 m. LOA and 23 ft. draft. However, restrictions in vessels' lengths vary when the quay is used by Ro/Ro vessels which tie up by the bow or the stern, and in this case vessels up to 600 ft. length are permitted.

HEALTH: When a vessel arrives it must hoist the yellow flag of the International Signalling Code. Free pratique will be granted by the reception commission after handing over of documents (See "Documents".) In the case of illness on board, this must be communicated to the vessel's Agent so that he may pass on the information to the Authorities. The vessel may not moor or carry out any operations until the doctor has come on board and verified that the illness does not constitute any danger.

RADIO: Vessels may communicate via the coastal station of the Panama Canal. Generally speaking, the same ships' agencies operating in the Canal Zone are those who represent vessels arriving at Bahia las Minas.

VHF: The Port Authority has VHF equipment at Colon which operates 24 hours a day on Channels 12 and 16.

For calls to the Port Authority, Channel 12 must be used. Refineria Panama also has VHF radio equipment and calls must be made via Channel 16.

RADAR: There is no radar service.
TUGS: Refineria Panama S.A. supplies this service to vessels which may require it. There are 4 tugs available. Generally, tugs work at the bow and stern of the ship, and lines must be fixed by the vessel's crew.
BERTHING:

Quay	*Length*	*Depth (Average low tide)*
Tanker quay	140 m.	40 ft.
2 lighter quays (refined products)	75 m. each	20 ft.
General cargo quay	90 m.	23 ft.

CRANES: There is no cargo handling equipment on the general cargo quay. All unloading must be by ship's gear.
SPECIAL CARGO FACILITIES: The dry cargo quay is used by Ro/Ro vessels making regular trips between Miami and Panama. The port offers unloading and loading services to these vessels.

The oil quays have special equipment for unloading and loading oil and its derivates.

STEVEDORES: These are provided by the Colon Port Workers' union, and must be contracted by the ship's Agent.
FRESH WATER: Available.
FUEL: Pipe-lines are available at all oil quays, but no such facility is available at the general cargo quay.

PROVISIONS: These can be obtained in the town of Colon via local suppliers, the Agent making the necessary arrangements.
DENSITY: 1.0212 grams per cu.cm. at 85° F.
TIME: Local time is GMT less 5 hours.
CONSULS: U.K., Norway, South Africa, Sweden, Denmark, Finland.
MEDICAL: Hospital available in the town of Colon 15 minutes from the port.
TELEPHONE: None available for connection to vessels. Available in the Port Authority offices. Tel: 42-1658.
AIRPORT: There is a small runway at Colon. At Panama, 90 kms. from Colon, is the airport of Tocumen, which is an international airport, served by the main world airlines.
HOLIDAYS: 1st January, 10th January, Mardi Gras, 1st May, 11th October, 2nd and 3rd November, 8th and 25th December.
POLICE/AMBULANCE/FIRE: Available in Colon. Refineria Panama has a small fire brigade, and also in the town of Colon, 15 kms. away, there is a fire brigade.
REPATRIATION: This can be done without difficulty via the Immigration offices.
SHORE LEAVE: No restrictions; but due to the distance between the port and Colon, a taxi service must be used. The tariff in a Refineria Panama taxi to Colon is approximately 5 U.S. dollars.
SERVICES: No special services offered. In the ports of the Canal Zone it is possible to have compass adjustments, laundry, chemicals, etc.
AUTHORITY: National Port Authority.

BALBOA: Canal Zone, 08.58 N. 79.34 W. (See Plan Book)

(N.B. For items not listed below, see "Panama Canal".)

RESTRICTIONS: Port open throughout 24 hours.
MAX. SIZE: Harbour limitations generally unrestricted as to length and beam. Depth about 40 ft. low water. Vessels in excess of 38 ft. 6 in. draft not handled during period 2.5 hours before and 2 hours after low water.

Tankers working cargo restricted to 700 ft. length and 36 ft. salt water draft.
TUGS: Available and assigned for berthing by Pilot. Tug's lines used at no extra charge.
BERTHING: No specific requirements as to arrival times. Nine berths available.

(Pleasure yachts under 65 ft. length, may be permitted to dock at Panama Canal Yacht Club or Balboa Yacht Club after clearance by Boarding Officer and after Master has received permission from Port Captain, Customs authorities and Yacht Club Officials concerned. Chief Customs Inspector shall have authority to grant or deny such permission at his discretion.)

Rodman Naval Station: Piers can accommodate vessels of 700 ft. length and up to 39 ft. draft for oil discharge, bunkers or stores.

Panama Canal Co. Dock:

Dock	*Usable length*	*Maximum S.W. draft*
4	492 ft.	30 ft.
6	742 ft.	36 ft.
7	1,058 ft.	34 ft.
8	470 ft.	26 ft.
14	775 ft.	36 ft.
15	1,146 ft.	40 ft.
16	742 ft.	38 ft.
18–A	500 ft.	39 ft.
18–B	500 ft.	35 ft.
18–C, D	1,000 ft.	40 ft.

STEVEDORES: Endeavour arrange arrival to avoid cost of "stand by" as Agent arranges gangs for 0700 hrs. or 1700 hrs. commencement.
TANKERS: One berth for vessels up to 40 ft. draft.
FRESH WATER: Available.
FUEL: Bunker "C", diesel, light fuel and light diesel available at Government wharves from commercial companies. Rate of delivery 2,000 bbls. per hour.

Vessel's personnel are to connect and disconnect all fuel lines aboard the vessel. The vessel is also to supply necessary fittings to match U.S. standard 4 in. and 6 in. 150-pound flanges.

A bunkering area has been established in the Pacific Anchorage.
REPAIRS: Emergency repairs possible.
DRY DOCK: Length 1044 ft., generally reserved for Canal Company vessels, but arrangements may be made for emergency dry-docking.
POLICE/AMBULANCE/FIRE: Emergency tel. 110; routine Police business 2-1277.
TELEPHONES: May be placed aboard through arrangement with Port Captain.
SHORE LEAVE: Generally permitted.
CUSTOMS: Customs and Immigration Inspection Service available Monday to Saturday from 0700 to 1700 hrs. Charges for such service after hours and on Sundays and holidays set forth in Panama Canal Tariff. Number of Inspectors required will be determined by Chief Customs and Immigration Inspector of port.
DELAYS: Delays in berthing, load or discharge or bunkering are minimal and infrequent. Eight hours is considered excessive.
AUTHORITY: Panama Canal Company.

AGENT: C. Fernie & Co., Inc. PO Box 212. Cable Address: "Fernie-Balboa". Also VHF. Telephone Nos.: Balboa 5657-5371. After office hours telephone numbers: Panama 21-2629, Panama 22-1037.

All correspondence should be addressed to Cristobal, Canal Zone.

COLON: 09.21 N. 79.54 W. (See Plan Book)

LOCATION: Located in the Bay of Limon, the port of Colon is completely separated from the port of Cristobal (Panama Canal Zone). It is a port, completely under the jurisdiction and operation of Panama. It is constituted by Quay No. 3 in the area of Fort Jessep.
GENERAL:
Shelter: All the quays are protected from the sea by the breakwater which protects the canal entrance in the Atlantic sector.
General description: The port of Colon (Quay No. 3) is used by small vessels of length not greater than 100 m. engaged in coasting trade between Colon and Bocas del Toro, and international trade between Colombia and Panama.
Port maritime access: The Colon port access is the same as that which leads to the port of Cristobal in the Canal Zone.
Nature of bottom: Soft mud and clay.
DOCUMENTS: The same documents are required and the same procedures are followed as at Bahia las Minas.
PILOTAGE: No pilotage service at Colon. Vessels berth and unmoor under the orders of their Masters.
RESTRICTIONS: The port is restricted to vessels of length not greater than 100 m. due to the size of the quays. Draft at the berths varies from 8.5 to 20 ft., which also restricts the size of vessels.
Aids to navigation: The port entrance channel has no aids of its own for navigation. Maritime accesses are however marked clearly by the Panama Canal Authority.
HEALTH: Same as Bahia las Minas.
RADIO: Vessels can communicate with the Port Administration on Channel 12 VHF.
TUGS: None at Quay No. 3, but they may be contracted in the Canal Zone.
BERTHING:

Berth	*Length*	*Depth (average low tide)*
Quay 1	55 m.	16 ft.
Quay 2	58 m.	16 ft.
Quay 3	82 ft.	10 ft.

STEVEDORES: All loading and unloading operations are carried out by the Union of Port Workers of Colon. The ship's Agent must make the necessary arrangements.
CRANES: None.
FRESH WATER: Available.
FUEL: Available at the quay by pipe-line. Also Refineria Panama supplies fuel in the Bay of Colon by means of lighters.
PROVISIONS: Available in Colon.
DENSITY: 1.0212 grams cu. cm. at 85° F.
TIME: GMT less 5 hours.
CONSULS: Norway, UK, Sweden, Denmark, Finland.
MEDICAL: In the town of Colon.
TELEPHONE: Available in the offices of the National Port Authority. Telephone 47-9181.
POLICE/AMBULANCE/FIRE: Available in Colon.
DEVELOPMENTS: *Container Port Project:*

Description: The container port project at Coco Solo is located on the opposite side to the town of Colon, adjacent on the Eastern side to the Bay of Manzanillo and on the South side with the area occupied by the Naval Base of Coco Solo which will be returned to Panama in accordance with the Torrijos-Carter Treaties of 7.9.1977.

CHARACTERISTICS OF THE CONTAINER PORT OF COCO SOLO: This modern terminal for the mooring, loading and discharge of container vessels will be developed in 2 main stages. In Stage 1, which consists of the supply of a quay for containers and 2 quays for Ro/Ro vessels, and Stage 2 consisting in the supply of 2 container berths and 2 quays for Ro/Ro vessels. It is hoped that Stage 1 may serve traffic expected between 1981 and 1986 and Stage 2 for projected traffic between 1986 and 1991. The total estimated cargo handled by the port in 1981 is 520,000 tons, and 752,000 in 1986.

Access to the port will be by means of an access channel 4.2 km. long by 150 m. wide with an average depth of 11.5 m., at the end of which will be built a handling dock whose diameter will be 430 m. in Stage 1 and 500 m. in Stage 2, with an average depth of 11.1 m. and 12.3 m. respectively.

The area available for development of Stages 1 and 2 is approx. 37 hectares which includes areas for storing containers and trailers, buildings and areas for future expansion. 16.2 hectares are covered by the development of Stage 1 and 6.8 hectares for Stage 2. The area of the buildings and the handling facilities is 6 hectares, there remaining available 8 hectares for a future expansion of the port.

The container storage area in Stage 1 will have a capacity for 1,500 t.e.u., which will increase to 2,100 t.e.u. within 5 years of operation. In the second stage, this same area will have a capacity for 2,100 t.e.u., which will be increased to 3,100 t.e.u. by 1991.

The length of the container berths will be 240 m. in Stage 1 and 500 m. in Stage 2, with an approx. draft of 11.1 m. and 12.3 m. respectively. The draft of the berths for Ro/Ro vessels will be 8.1 m. in both stages.

The port will have all necessary services for its operation, efficiency and safety such as: aids to navigation, control systems, and will offer all services to vessels using the port such as drinking water, maintenance workshops, firefighting services, loading and unloading services, bunkers, and towing services. There will also be all public services, lighting, electricity, water and telephones.

Container Port at Coco Solo

1. *Access Channel*	*Stage I*	*Stage II*
Length	4,300 m.	the same
Width	150 m.	the same
Draft	11.5 m.	12.72 m.
2. *Manoeuvring Dock*		
Diameter	430 m.	500 m.
Draft	11.1 m.	12.32 m.
3. *Vessel Capacity*		
T.E.U.	1,200	1,800
Draft	11.1 m.	12.32 m.
4. *Berths*		
Container berth	1	2
Dimensions	240×24 m.	500×24 m.
Draft	11.1 m.	12.32 m.
Ro/Ro berth for stern discharge	2	2
Draft	8.1 m.	8.1 m.
5. *Dredging*		
Volume dredged	2,650,000 cu.m.	1,600,000 cu.m.
6. *Storage Areas*		
Containers	8.2 Ha. (1,500 – 2,100 t.e.u.)	15 Ha. (2,100 – 3,100 t.e.u.)
Ro/Ro	8.0 Ha. (400 trailers)	8.0 Ha. (510 trailers)
7. *Tug Services*		
Number of tugs	2	information
Power	2,000 h.p.	not available

8. *Cargo Handling Equipment*
1 40-ton container crane
3 'transtainers'
1 fork lift with 60,000 lb. capacity
2 fork lifts with 25,000 lb. capacity
8 tyred tractors
15 20/40 ft. container combination chassis
8 fork lift with 5,000 lb capacity
1 fork lift with 25,000 lb. capacity (general usage)
3 platform trailers
1 fuel truck
1 service lorry
1 line marker
1 mechanical sweeper for cleaning purposes
1 firefighting truck

AUTHORITY: National Port Authority.

CRISTOBAL: Canal Zone, 09.21 N. 79.54 W. (See Plan Book)

(N.B. For items not listed below, see "Panama Canal".)

PORT LIMITS: Ship's arrival time is normally determined by their passage between the breakwater lights. Those that anchor outside the breakwater by arrangement with the Port Captain are timed as arrived when they drop anchor.

PILOTAGE (Also see "Panama Canal"): Pilotage into Cristobal not compulsory, although services of Pilot outside breakwater are available on request.

Vessels arriving outside Cristobal Breakwater who have requested an outside Pilot are required to *heave to and make a good lee.*

A pilot ladder rigged with appropriate spreaders and well illuminated at night to be provided by vessel. Accommodation ladders not acceptable for embarking Pilots outside breakwater.

Marine Director's Notice to Shipping Agents No. 8–74:

1. A vessel shall, weather permitting, have both an accommodation ladder and a pilot ladder rigged and ready for use upon arrival in Canal Zone Waters.
2. The pilot ladder shall conform to Regulation 17, Chapter V of the International Convention for the Safety of Life at Sea 1960 (SOLAS) and to all additional recommendations of the International Maritime Consultative Organisation (IMCO).
3. The accommodation ladder may be turned in and secured after the Pilot has boarded the vessel in the anchorage, provided the freeboard does not exceed 9 m. (30 ft.). If the freeboard exceeds 9 m., the accommodation ladder may not be turned in until the last Panama Canal employee boards prior to arrival at the locks.
4. A pilot hoist may be used provided the design and construction of the hoist and ancillary equipment are of such a standard as to ensure an effective and safe means of embarkation and disembarkation. The pilot hoist should only be used when:
   (a) A conventional pilot ladder is rigged and ready for immediate use but triced up well clear of the hoist;
   (b) A lifeline attached to a safety stop and a lifebuoy fitted with a self-igniting light are ready for immediate use.

ANCHORAGE: Vessels will ordinarily proceed to anchorage area according to length and draft unless otherwise directed. Arriving vessels expected anchor as far to South and inward from main channel in their anchorage area as is consistent with safety. Vessels anchoring in non-designated areas may be required to move.

Anchorage Area "A". For all ships with a deep salt-water draft of not less than 34 ft. and not in excess of 39 ft. Minimum charted depth is 40 ft.

This area starting at Lat. 9° 23′ 21″ N., Long. 79° 55′ 21″ W.,
thence to Lat. 9° 22′ 48″ N., Long. 79° 56′ 15″ W.,
thence to Lat. 9° 22′ 14″ N., Long. 79° 56′ 15″ W.,
thence to Lat. 9° 21′ 56″ N., Long. 79° 55′ 48″ W.,
thence to Lat. 9° 21′ 25″ N., Long. 79° 55′ 48″ W.,
thence to Lat. 9° 21′ 25″ N., Long. 79° 55′ 21″ W.,
thence due North to starting-point. However, restricted area North and East of Buoy 2, as charted, must be observed. Explosive sector charted in this area to be avoided whenever possible.

Anchorage Area "B". For all ships with salt-water draft under 32 ft. Minimum depth is 29 ft. Explosive sector restricted to vessels carrying explosives or specially designated vessels. All ships of such length are under no circumstances swing into Anchorage Area "A".

This area starting at Lat. 9° 22′ 48″ N., Long. 79° 56′ 15″ W.,
thence to Lat. 9° 22′ 32″ N., Long. 79° 56′ 41″ W.,
thence to Lat. 9° 21′ 42″ N., Long. 79° 56′ 41″ W.,
thence to Lat. 9° 21′ 52″ N., Long. 79° 56′ 00″ W.,
thence to Lat. 9° 21′ 25″ N., Long. 79° 56′ 00″ W.,
thence to Lat. 9° 21′ 25″ N., Long. 79° 55′ 48″ W.,
thence to Lat. 9° 21′ 56″ N., Long. 79° 55′ 48″ W.,
thence to Lat. 9° 22′ 14″ N., Long. 79° 56′ 15″ W.,
thence due North to starting-point.

Anchorage Area "C". Required pilotage waters for inbound vessels.

This area starting at Lat. 9° 21′ 25″ N., Long. 79° 55′ 21″ W.,
thence to Lat. 9° 21′ 25″ N., Long. 79° 56′ 00″ W.,
thence to Lat. 9° 20′ 48″ N., Long. 79° 55′ 57″ W.,
thence to Lat. 9° 20′ 27″ N., Long. 79° 55′ 21″ W.,
thence due North to starting-point. Restricted area East and South of Buoy 2, as charted, must be observed.

Anchorage Area "D". For all ships of over 350 ft. in length and a deep salt-water draft of less than 35 ft. except where minimum charted depth is 32 ft.

This area starting at Lat. 9° 23′ 19″ N., Long. 79° 55′ 15″ W.,
thence to Lat. 9° 22′ 55″ N., Long. 79° 54′ 21″ W.,
thence to Lat. 9° 22′ 22″ N., Long. 79° 54′ 21″ W.,
thence to Lat. 9° 22′ 02″ N., Long. 79° 54′ 55″ W.,
thence to Lat. 9° 22′ 02″ N., Long. 79° 55′ 15″ W.,
thence due North to starting-point.

Anchorage Area "E". For all ships less than 350 ft. and small craft. Minimum charted depth of water is 24 ft.

This area starting at Lat. 9° 22′ 55″ N., Long. 79° 54′ 21″ W.,
thence to Lat. 9° 22′ 27″ N., Long. 79° 53′ 54″ W.,
thence to Lat. 9° 22′ 22″ N., Long. 79° 53′ 54″ W.,
thence to Lat. 9° 22′ 22″ N., Long. 79° 54′ 21″ W.,
thence due North to starting-point.

Anchorage Area "F". For small craft and yachts. Pilotage for this area will be decided by Cristobal Port Captain, based on merit of each individual case. Under no circumstances may a vessel proceed to this area prior to being cleared by Boarding Officials. (Bounded by Channel Buoy "3" by a direct line through Buoys "A," "B," "C," "L4," "L2" and return to Buoy "3".)

Outer anchorage area. Established North-West of Cristobal breakwater have the following co-ordinates: Commencing at Lat. 09° 23′ 14″ N. Long. 79° 55′ 21″ W. (West breakwater light); thence to 09° 24′ 40″ N. 79° 56′ 00″ W. (buoy "A", whistle sea buoy); thence to 09° 24′ 40″ N. 79° 57′ 00″ W.; thence to 09° 23′ 14″ N. 79° 57′ 00″ W.; thence due East to starting point.

During periods of harbour congestion, large, deep-draft vessels and/or any vessel so directed may anchor outside the breakwater in the approved area. Such vessels must advise Cristobal Signal Station, by VHF Channel 12, the time of passing sea buoy, in order to establish order of transit. Masters will be given a definite time to enter the breakwater, where the vessel will be met by transit Pilot(s) and boarding officials.

Vessels must strictly adhere to the breakwater entry times as given, in order that transit schedule can be maintained.

Prohibited Anchorage. Eastern side of channel, Canal Zone waters South of Lat. 9° 22′ 02″ N. to Mole Buoy in order to give clear access to Colon Harbour. Also, no vessel or craft may proceed South of Latitude 9° 21′ 25″ N. prior to being cleared by Boarding Officials. No vessel may anchor with any part of the vessel in the main channel or closer than 300 yards to either East or West breakwater lights.

In cases due to harbour congestion, any vessel may be directed to anchor to Westward outside breakwater entrance and given an order as to the time it is to pass through the breakwater entrance.

RESTRICTIONS: Port open throughout 24 hours.

MAX. SIZE: Harbour limitations generally unrestricted as to length and beam. Draft 40 ft.

RADIO: The Port Captain may be contacted via VHF Channel 12. Commercial telephone calls and messages to Agents may be made via Panama Radio, VHF Channel 16.

TUGS: Available and assigned for berthing by Pilot. Tug's lines used at no extra charge.

BERTHING: No specific requirements as to arrival times. Fifteen cargo and bunkering berths.

Cristobal Harbour Controlling Depths:

Dock	Berth	Usable Length (ft.)	Max. S.W. Draft (ft.)	Max. Lgth. of Ship at Max. Draft (ft.)	Beam Limit (ft.)	Total Lgth. Avail. of Dock Face (ft.)	Remarks
6	AB	800	40		None	1030	F.O. HDO-Water
6	B		36		None		
6	CD	1030	40		None	1030	F.O. HDO-Water
7	AB	800	40		None	977	F.O. HDO-Water
7	B		36		None		
7	CD	1000	40		None	1000	F.O. HDO-Water
7	E	240	33		None	240	Water
8	AB	600	40		None	990	F.O. HDO-Water
8	B		30		None		
8	CD	1010	40		None	1010	F.O. HDO-Water
9	AB	950	37		None	1068	FO-HDO-LDO-Water
9	B		28		None		
10		423	30	600	None	423	FO-HDO-LDO-Water
14		460	29	500	None	460	
15		900	35	700	90	900	
16	AB	1070	42		None	1070	FO-HDO-LDO-Water, Gasoline
16	CD	1070	40		None	1070	FO-HDO-LDO-Water, Gas, 16D, no LDO
16	E	458	29.5	300	None	458	FO-HDO-LDO-Water, Gasoline
Mindi		275	26	492	None	275	No Services

STEVEDORES: Endeavour arrange arrival to avoid cost of "stand by" as Agent arranges gangs for 07.00 hrs. or 17.00 hrs. commencement.

TANKERS: Four berths available.

FRESH WATER: Available from piers.

FUEL: Bunker "C", diesel, light fuel and light diesel available at Government wharves from commercial companies. Rate of delivery 2,000 bbls. per hour.

The Southern part of Anchorage C, Cristobal Harbour, has been designated a limited bunkering area for vessels whose draft is too great to use the East breakwater bunkering area.

Pilotage is compulsory out and into this area for vessels and bunkering barges.

Also see "Balboa".

REPAIRS: Emergency repairs possible.

DRY DOCK: Length 386 ft., breadth 60 ft., depth over blocks 20 ft. 6 in. MLW.

POLICE/AMBULANCE/FIRE: Emergency number 110. Routine Police business 3–2111.

TELEPHONES: May be placed aboard through arrangement with Agent.

SHORE LEAVE: Generally permitted.

CUSTOMS: Customs and Immigration Inspection Service available Monday to Saturday from 0700 hrs. to 1700 hrs. Charges for such service after hours and on Sundays and holidays set forth in Panama Canal Tariff. Number of inspectors required will be determined by Chief Customs and Immigration Inspector of port.

DELAYS: Delays in berthing, load or discharge or bunkering are minimal and infrequent. 8 hours is considered excessive.

AUTHORITY: Panama Canal Company.

AGENT: C. Fernie & Co., Inc. PO Box 5042, Cable address: "Fernie-Cristobal". Telephone Nos.: Cristobal 43-3393 (5 lines). Telex Nos.: ITT–3482020, TR–9211 "Fernie Pa". Also VHF. After office hours telephone numbers. Cristobal 2468, Cristobal 2568.

PANAMA CANAL (entering Cristobal or Balboa) (See Plan Book)

§ Indicates Panama Canal – Code of Federal Regulations Number.

REGULATIONS: The following are some of the important Canal Regulations.

§101.2 Boarding of arriving vessels:

(a) Arriving vessels that are subject to quarantine inspection and arriving vessels that are exempt from quarantine inspection due to compliance with §61.171 of this chapter and intend to transit the Canal without first docking normally will be boarded upon arrival. The boarding will occur inside the breakwater at the Atlantic entrance to the Canal or off the seaward end of the dredged, marked channel at the Pacific entrance. It will be performed by a Panama Canal boarding officer in accordance with the procedures and during the boarding hours established for the respective ports by the Canal authorities. When such vessels are not boarded immediately upon arrival, they shall anchor in a designated anchorage area and await the boarding officer.

(b) Arriving vessels that are exempt from quarantine inspection due to compliance with §61.171 of this chapter and intend to dock at their port of arrival may proceed to the dock without awaiting a boarding officer. Customs, Immigration and admeasurement functions relating to such vessels will be performed by a boarding officer after the vessel docks.

(38 FR 3963, Feb. 9, 1973)

§101.3 Functions of the Boarding Officer:

The boarding officer shall perform the functions of admeasurer for the purpose of determining Panama Canal tolls; shall make inspections for the purpose of insuring compliance with quarantine, immigration, and customs laws and regulations; and shall act as deputy shipping commissioner for seamen aboard US flag vessels pursuant to 2 C.Z.C. 1381 and 1382, 76A Stat. 48.

§101.4 Measurement of vessel making maiden transit:

A vessel that arrives after 2000 hrs. and is to make her maiden transit will normally be admeasured on the following day.

§101.5 Compliance with quarantine and immigration instructions:

(a) In the case of vessels subject to quarantine inspection, all persons shall comply strictly with instructions from the boarding officer until such time as pratique is granted.

(b) In the case of vessels subject to immigration inspection, all persons shall comply strictly with instructions from the boarding officer in all matters concerning immigration inspection; and, until the vessel has been granted immigration clearance, no person other than the boarding officer and the Pilot shall go aboard or leave the vessel unless authorised to do so by the Boarding Officer.

§101.6 Identification signals:

Every vessel shall hoist its signal letters when approaching and entering a terminal port, and those arriving at night shall promptly signal their names, by flashing light, to the signal station. This communication of the vessel's name by signal letters or flashing light is mandatory even though the vessel communicates by voice radio. The signal station on Flamenco Island is equipped with voice radio for communication with vessels approaching the Pacific entrance to the Canal on the following frequencies: International Calling and Distress 2182 kc/s and Panama Canal Company 2846 kc/s.

§101.1 Visual-signal stations at Canal approaches:

The established visual-signal stations with which vessels may communicate upon arriving at the Canal approaches, by means of International Code and flashing light, are located on the seaward end of Pier 6, Cristobal, and on Flamenco Island at the Pacific entrance. Such stations are also utilised to assist in control of traffic at the terminal ports. The signal station at Flamenco Island is also equipped with voice radio.

Cross Reference: See Part 123 for provisions respecting radio communication by vessels prior to arrival and while they are in Canal Zone waters.

§103.7 Temporary holding of vessels:

The Canal authorities may hold a vessel for the purpose of investigating any claims or disputes that may arise, or any formal or informal complaint or allegation of a violation of the laws of the Canal Zone or of the United States or of the provisions of this chapter. A vessel may also be held until, in the opinion of the Canal authorities, its tenderness, trim, list, cargo, hull, machinery, and equipment have been put into such condition as will make the vessel reasonably safe for her passage through the Canal. No claim for damages shall be allowed or considered because of any such temporary holding of vessels.

§103.8 Order of transiting of vessels:

The Canal authorities may dispatch vessels through the Canal in any order and at any time they may see fit. Priority of arrival at a terminal does not give any vessel the right to pass through the Canal ahead of another that may arrive later, although order of arrival will be consideration in determining the order of passage.

§103.4 Load and trim:

(a) A vessel shall not be permitted to transit the Canal if she: (1) Has a list of more than 10 degrees; (2) Is so tender or otherwise so loaded as to dangerously affect her stability or manoeuvrability; or (3) Is so trimmed as to dangerously affect her manoeuvrability.

(b) A vessel having a list of between 3 degrees and 10 degrees, or which is so loaded or so trimmed as to adversely affect her manoeuvrability, may be permitted to transit in the discretion of the Port Captain, provided the Master thereof, in the presence of the Pilot, signs an undertaking, for the said vessel, her owners, operators, or any other persons having any interest in her, and for himself, releasing the Panama Canal Company from and indemnifying it against, any loss, damage, or liability incurred by the Panama Canal Company.

§103.10 Vessels required to be equipped with certain indicators:

(a) All vessels in excess of 150 ft. in length shall be equipped with properly operating rudder-angle and engine-revolution indicators in the wheelhouse so located and illuminated as to be readily visible to a Pilot.

(b) All vessels with beams in excess of 80 ft. shall be equipped with properly operating rudder-angle and engine-revolution indicators in the wheelhouse and on each bridge wing so located and illuminated as to be readily visible to a Pilot.

(c) All vessels in excess of 150 ft. in length which are equipped with variable pitch propellers shall have properly operating pitch indicators in the wheelhouse so located and illuminated as to be readily visible to a Pilot.

(d) All vessels with beams in excess of 80 ft. which are equipped with variable pitch propellers shall have properly operating pitch indicators in the wheelhouse and on each bridge wing so located and illuminated as to be readily visible to a Pilot.

(e) Any vessel which fails to meet the requirements of this section may be denied transit. If the Canal authorities decide that the vessel can be handled without undue danger to equipment or to personnel, notwithstanding her failure to comply with other requirements of this section, the vessel may be allowed to transit after the Master thereof, in the presence of the Pilot, signs an undertaking for the vessel, her Owners, Operators or any other persons having any interest in her, and for himself, releasing the Panama Canal Company from and indemnifying it against any loss, damage or liability incurred by the Panama Canal Company.

§103.22 Vessels at fuel berths:

A vessel at a fuel berth shall keep up steam and be ready to move on short notice unless special authority to the contrary has been obtained from the Canal authorities.

§103.23 Vessels at wharves; fire watch; gangways:

A vessel lying at any pier, dock, or wharf shall at all times keep a satisfactory watch for fire and have suitable fire-fighting apparatus ready for immediate use. Any such vessel shall also keep each gangway which is in use, whether such gangway has been supplied by the vessel or by the Panama Canal Company, properly illuminated when necessary, and properly secured at all times, moving or adjusting the same to allow for rise and fall of the tides and/or other changed circumstances. In addition, a safety net shall be properly rigged beneath each gangway.

§103.27 Clear view forward from the bridge and steering light requirement for certain vessels:

(a) A vessel may not be navigated in Canal Zone waters unless there is a clear, unobstructed view forward from the bridge.

§109.5 Ship's gear to be ready during transit; test:

Before beginning transit of the Canal, a vessel shall have hawsers, lines and fenders ready for passing through the locks, for warping, towing, or mooring as the case may be; and shall have both anchors ready for letting go. The Master shall assure himself, by actual test, of the readiness of the vessel's main engines, steering gear, engine room telegraphs, whistle, rudder-angle and engine-revolution indicators, and anchors. During the transit, at all times while a vessel is underway or moored against the lock walls, her deck winches, capstans, and other power equipment for handling lines, as well as her mooring bitts, chocks, cleats, hawse pipes, etc., shall be ready for handling the vessel, to the exclusion of all other work.

OIL POLLUTION: Every vessel subject to the Federal Maritime Commission's oil pollution financial responsibility requirements, must maintain on board and make available to Panama Canal Company boarding inspectors the original or copy of its certificate. Any vessel that does not have the necessary certificate on board will not be permitted to transit the Panama Canal.

If pollution occurs the Master's appearance in court may be required with possible heavy fine and attendant delays.

DOCUMENTS: All documents listed below shall be ready for immediate delivery to boarding inspector when he boards vessel upon each arrival of vessel in Canal Zone.

Documents required	*From ships which transit Canal but do not take on or discharge passengers or cargo at Canal Zone ports (number of sets)*	*From ships taking on or discharging passengers or cargo at Canal Zone ports (number of sets)*
(1) Ship's information and quarantine declaration (Panama Canal Form 4398)	1	1
(2) Clearance from last port	*1	*1
(3) All certificates of a sanitary nature	*1	*1
(4) Passenger list: Passengers transitting only (on Panama Canal Form 20)	**2	**2
(5) Passenger list: Passengers for discharge (on Panama Canal Form 18–9)	0	**4
(6) Crew list (on Panama Canal Form 1509–10)	2	2
(7) Store list	†1	†1
(8) Cargo declaration (Panama Canal Form 4363)	1	‡1
(9) Manifest of local cargo	0	4
(10) Panama Canal tonnage certificate	1	††1
(11) National register	1	1
(12) General arrangement, capacity, tank and engine room plans	‡1	††1
(13) Report of structural alterations and of changes in use of tanks or other spaces since last transit	1	††1
(14) Declaration by all vessels except ships of war of all arms and munitions of war aboard. Explosives are declared separately	**2	**2
(15) Declaration as to vessel's port(s) of departure, destination, and ports of call, within the last three months, with the corresponding actual or approximate dates	1	1

*For examination and possible retention.

**Not required unless such persons or cargo are carried.

†Required if ship during transit is laid up for repairs, regardless of whether passengers or cargo are taken on or discharged.

††Not required unless ship transits Canal.

‡For taking up and subsequent return through Agent or otherwise.

Documents required at ports. In case a vessel takes on or discharges passengers or cargo at only 1 Canal Zone port and does not transit Canal, documents indicated in column 2 are required. In case a ship docks or takes on or discharges passengers or cargo at both Cristobal and Balboa, or at a port other than port of entry, all documents in column 2 are required at first port and, in addition, 4 copies of document (9) required at second port.

Crew List. For purposes of additional identification of Crew members, all copies of crew list shall include for each seaman the serial number of his certificate of identification, continuous discharge book, passport or other satisfactory identifying documentation. In addition, the given name and middle initial, as well as family name, shall be shown for all seamen.

Passenger list. All copies of passenger lists shall be accurate and legible and shall be delivered to boarding inspector. The list shall show passengers in alphabetical order. Passengers who are to be discharged at Canal Zone ports shall be listed separately from other passengers aboard who are only to transit Canal. In event any passenger listed for discharge fails to disembark, or any passenger listed for transit disembarks, notice shall be given promptly by Master through his ship's Agent to Port Captain and a supplementary passenger list (same number of copies as is required for an original list of disembarking passengers) showing required information concerning such passengers shall be furnished promptly to Chief Customs Inspector prior to clearing Canal Zone waters.

(It is understood that "Advance Documents" are no longer required by Authorities. However, Agents request copies of Crew and Passenger Lists in advance, which should, if possible, be airmailed from last Port).

PILOTAGE: *§105.4 Pilotage changes:* Pilotage for vessels in transit through the Canal is free; but whenever any vessel, while in Canal waters, discharges or receives freight or passengers, or remains for the purpose of effecting repairs, or makes either terminal a port of call, it is liable for the applicable port pilotage charge established by the Canal authorities.

§105.5 Pilotage beyond Atlantic Breakwater

Should a vessel desire a Pilot to meet it outside the Atlantic breakwaters, such vessel shall remain there and make signal to that effect.

§105.6 Status and function of Pilot

The Pilot assigned to a vessel shall have control of the navigation and movement of such vessel.

§105.1 Pilots required

(a) Except as provided by §§105.2 and 105.3, no vessel shall pass through the Canal, enter or leave a terminal port or manoeuvre within the Canal Zone waters lying inside the Canal entrances without having a Panama Canal Pilot on board.

(b) Normally, a vessel will, unless advised to the contrary by the Port Captain, be boarded by the Panama Canal Pilot inside the breakwater at a point North of the Mole Beacon at the Atlantic entrance and in the Merchant Vessel Anchorage to seaward of Buoys 1 and 2 at the Pacific entrance.

(c) Normally a Pilot will relinquish control of the navigation and movement of a vessel proceeding seaward when the vessel passes the Mole Beacon, Atlantic entrance, or Buoys 1 and 2, Pacific entrance. A Pilot shall not, however, relinquish control at the Mole Beacon of a Northbound vessel which is to anchor in Limon Bay, but shall take the vessel to anchor.

Shelter for Pilots: Purpose of platform is to provide a shelter from sun and rain for Pilots working near bow of vessel and to provide adequate visibility around the locks to reduce danger of damage.

Platforms are required on:

(a) All vessels that are 100 ft. or more in extreme beam with bridge aft; and

(b) All vessels that are 95 ft. to 99.9 ft. extreme beam with bridge 600 ft. or more from the bow measured at the outside of the wheelhouse at the centreline.

Platform to be erected at position which is farthest forward at extreme beam and not more than 6 in. inboard from the vertical plane of shell plating. 1 on each side of the vessel. Awning made of suitable material. Deck of wood or other suitable material with non-skid surface.

Vessels equipped with previously approved design may continue to use platforms of that design until they require replacement.

Further inquiries on this subject should be directed to Port Captain Balboa/Cristobal.

The vessels mentioned above require 4 Pilots, 2 forward and 2 aft, when transitting the locks of the canal.

STEERING LIGHT: All vessels with the bridge more than 250 ft. from the stem must have a steering light at or near the stem. The light may be any colour except white, green or amber, must not be visible forward of the beam, and must be of such an intensity and so fixed as to be clearly visible from the navigation bridge.

ANCHORAGES: No vessel shall anchor within navigable waters of Canal Zone in other than a designated anchorage.

1. *Merchant Vessel Anchorages.* (a) *Atlantic entrance merchant vessel anchorage.* An area to the West of the Canal channel bounded as follows: Starting at a point "A", located in position 9° 21′ 25″ N., 79° 55′ 31″ W., and marked by gas buoy No. 2, thence 900 yd. 270° true to a point "B" located in position 9° 21′ 25″ N., 79° 55′ 58″ W., thence to lighted buoy "1", thence to lighted buoy "H", thence due North to a point "C" located in position 9° 22′ 07″ N., 79° 56′ 41″ W., thence 2,800 yd 59° true to a point "D" located in position 9° 22′ 50″ N., 79° 55′ 29″ W., and thence to the starting-point. The line extending due West from the Cristobal Mole through lighted beacon No. 1 and lighted buoy No. 2 (9° 21′ 25″ North) marks the Southern limit of the anchorage area. No vessel shall pass this line without having been passed by the boarding officer and without having a Canal Pilot on board.

(b) *Gatun Lake anchorage basin.* An area immediately East of the Canal channel line, bounded by a line extending to a point 450 yd., 120° true from the East wing-wall at the South end of Gatun Locks, thence 690 yd., 148° true to flashing white lighted buoy "A" thence 700 yards, 070° true to flashing white lighted buoy "1" thence 1,130 yards, 148° true to quick flashing white lighted buoy "3" thence 2,800 yards, 224° true through fixed white lighted buoy "5" and black can buoy "7" to the Canal channel line at flashing white lighted buoy "9"; the channel prism being the Westerly boundary line of the anchorage area.

(c) *Pacific entrance merchant vessel anchorage.* An area bounded as follows: beginning at a point in position 8° 51′ 50″ N., 79° 30′ 00″ W., marked by a lighted whistle buoy which is painted with alternating black and white vertical stripes and which shows short-long flashing white light every 8 seconds, i.e. light 0.4 seconds, eclipse 0.4 seconds, light 1.6 seconds, eclipse 5.6 seconds; thence due East to Long. 79° 28′ 00″ W.; thence due North to Lat. 8° 54′ 31″ N., thence due West toward Flamenco Island Light to a point 8° 54′ 31″ N., 79° 30′ 46″ W.; thence S.W. touching the N.W. corner of San Jose Rock to position 8° 53′ 27″ N., 79° 31′ 23″ W., marked by canal-entrance lighted buoy No. 2, thence S.E. to the point of beginning.

2. *Anchorage areas for ships loaded with hazardous cargoes.*
(a) *Atlantic end.* Area included in rectangle 1,000 yd. wide immediately South of West breakwater, starting at a point on West breakwater 1,000 yd. from West Breakwater Light and thence extending Westward 2,000 yd. along breakwater.
Cristobal: Grade "A" Explosives Anchorage (over 5 tons) and all LNG and LPG Tankers loaded or not Gas free.
Area bounded by:

Lat.	09° 24′ 40″ N.	Long.	79° 57′ 00″ W.
Lat.	09° 24′ 40″ N.	Long.	79° 56′ 29″ W.
Lat.	09° 23′ 53″ N.	Long.	79° 56′ 29″ W.
Lat.	09° 23′ 53″ N.	Long.	79° 57′ 00″ W.

(b) *Pacific end.* Area South of Naos Island bounded on the East by a line drawn South (True) from entrance gas buoy No. 1; on the South by a line drawn East (True) from Tortolita Island, and on the North and West by the curve of 30 ft. depth.

Vessels carrying explosive cargoes shall anchor in the explosive anchorage areas, on arrival at the Canal Zone, and there await instructions.

MAX. SIZE: N.B. The following paragraphs serve as an approximate guide to permitted size of vessel in transitting Canal, but Owners and Operators should always seek official clarification and ruling from: The Marine Director's Office, Panama Canal Company, Box 5012, Balboa, Canal Zone.

MARINE DIRECTOR'S NOTICE TO SHIPPING AGENTS No. 27-76
SUBJECT: Size and Draft Limitations of Vessels
REFERENCE: (a) Marine Director's Notice to Shipping Agents No. 1-75 dated January 17, 1975.
ENCLOSURES: (1) Bilge radius versus safe draft.
(2) Bilge information needed prior to initial transit.

1. Reference (a) is cancelled.

2. *Definitions.*
TFW: Tropical fresh water of Gatun Lake, density 0.9954 gms/cc at 85° F. (Transition to fresh water frequently alters the trim of large vessels 3 in. to 4 in. by the head.)
Published TFW maximum draft: Deepest point of immersion in Gatun Lake waters as promulgated by the Marine Director because of Gatun Lake level or by limitations deemed necessary because of restrictions in the Canal.
Maximum authorised transit draft: Deepest point of immersion in TFW of a particular vessel permitted at anytime, Gatun Lake level and Canal restrictions permitting.
Commercial Vessel: A self-propelled vessel other than a naval, military or other public vessel.
Integrated tug-barge combination: A barge that is specifically configured to receive a tugboat and with the tug, becomes, in effect, a single self-propelled unit.
Non-self-propelled vessel: A vessel which either does not have an installed means of propulsion, or has an installed means of propulsion which is not functioning during transit.
Barge: A flat-bottomed vessel of full body and heavy construction without installed means of propulsion.

3. *Maximum authorised transit draft* of vessels with draft in excess of 35 ft. 06 in.

Prior to the initial transit of a vessel whose transit draft will exceed 35 ft. 06 in., Owners, Operators, or Agents must supply in full the information required in enclosure (2) and request the maximum authorised transit draft for the vessel (deepest point of immersion TFW) from Port Captain, Balboa or Port Captain, Cristobal, depending on the arrival port, not later than 2 weeks prior to loading of the vessel. This request will be returned with the approved maximum authorised transit draft stamped thereon.

4. *Draft during initial transit.*
The initial transit is permitted at the maximum authorised transit draft. After the initial transit, unless the vessel's Agent or Owner is notified of any restrictions imposed by Canal authorities, this maximum authorised transit draft will remain in effect.

5. *Minimum transit drafts, measured in salt water.*
All vessels transiting the Canal should have sufficient ballast to permit safe handling during transit. The following are minimum salt water drafts for ships anticipating transit.

Length	*Minimum Drafts*
Up to 425 ft.	–Trimmed so Pilot can see the ranges over the forecastle from centre of navigation bridge
Over 425 ft.	– 8 ft. forward, 14 ft. aft, TSW
Over 475 ft.	– 18 ft. forward, 20 ft. aft, TSW
Over 525 ft.	– 20 ft. forward, 22 ft. aft, TSW
Over 580 ft.	– 22 ft. forward, 24 ft. aft, TSW
Over 625 ft.	– 24 ft. forward, 26 ft. aft, TSW

Drag must not adversely affect manoeuvrability.

6. *Maximum length.*
a. The maximum length overall including bulbous bow for a commercial vessel acceptable for regular transit is 900 ft., except passenger and container ships may be 950 ft. overall.
b. The maximum length for integrated tug-barge combination acceptable for regular transit is 900 ft. overall including tug. Tug-barge combination must transit together as one unit with the tug supplying the propelling power.
c. The maximum aggregate overall length for non-self-propelled vessels acceptable for transit is 850 ft. including accompanying tugs. Accompanying tugs must lock through with the non-self-propelled vessel.

7. *Maximum beam.*
a. The maximum extreme beam for a commercial vessel and the integrated tug-barge combination acceptable for regular transit is 106 ft.
b. Wider commercial vessels including integrated tug-barge combination up to an extreme beam of 107 ft. may be permitted to transit on a one-time delivery basis only with the deepest point of immersion not exceeding 37 ft. TFW.
c. The maximum extreme beam for non-self-propelled vessels (other than integrated tug-barge combinations) acceptable for transit is 100 ft.

8. *Previous Approvals and Delivery Transits.*
Vessels approved for regular transit prior to this Notice whose maximum beam or length slightly exceed the limits set forth in paragraphs 6 and 7 may continue to transit on a regular basis. After the date of this Notice approval will not be given for transit of other commercial vessels whose extreme beam exceeds 106 ft. by any amount except for vessels transiting on a one-time delivery basis.

9. *Release from liability.*
Masters of vessels will be required to execute a form undertaking to release the Panama Canal Company from liability in case of accident and to indemnify the Company for damages sustained in the following instances:
a. When a vessel transits at less than the minimum drafts in paragraph 5, has a list in excess of three degrees, or is so loaded or trimmed that manoeuvrability is adversely affected.
b. When a vessel transits on a one-time delivery basis with extreme beam exceeding 106 ft.

10. *Denial of transit.*
Vessels will be denied transit under the following circumstances:
a. When the vessel's maximum point of immersion exceeds its maximum authorised draft.
b. When the vessel's maximum point of immersion exceeds the published TFW maximum draft then in effect.
c. When the length overall including bulbous bow exceeds that stated in paragraph 6 above unless the vessel was approved for regular transit prior to this Notice.
d. When the extreme beam exceeds that stated in paragraph 7 above by any fractional amount however minor unless the vessel was approved for regular transit prior to the date of this Notice.
e. Unusual vessels requiring both lock lanes simultaneously.

11. *GENERAL.*
a. Vessels of 100 ft. beam and over whose list, trim or handling characteristics are such as to endanger themselves, Panama Canal appurtenances and/or a third party, may have such further limitations placed on them as Canal authorities deem necessary to insure reasonable safety.

b. The draft of non-self-propelled barges 550 ft. or more in length may be limited, when in the opinion of Canal authorities, such limit is necessary to insure reasonable safety.

c. Vessels may transit with deck cargo protruding over one side only not to exceed 15 ft., but the maximum beam, including protrusions must not exceed 85 ft.

d. Non-self-propelled vessels, other than integrated tug-barge combinations, will be accepted only on an individual basis; advance permission for initial transit as a non-self-propelled vessel is required. Displacement of these vessels is limited to 35,000 tons and the draft requirements of paragraph 5 are applicable. Riding crews must be provided in sufficient numbers, as required by the Port Captains, to safely handle towboat lines and boarding ladders, and to assist in mooring.

e. The numerous constraints affecting the transit schedules of vessels and tows make it important that information provided in advance of the initial transit of the vessel include a capacity plan, general arrangement plans, engine room plans, and whenever possible, a photostatic copy of national register, load line certificate and Panama Canal tonnage certificate. This advance information will minimise the time spent aboard the vessel by Panama Canal officials before commencement of the initial transit.

Enclosure 1.

TABLE OF LIMITING DRAFTS DUE TO BILGE RADIUS CONTACTING CHAMBER BATTERS

(Allows for 6 in. thick rubber fenders on lock walls at batter locations).

Radius of Turn of Bilge (feet)

in.	1 ft.	2 ft.	3 ft.	4 ft.	5 ft.
0	35 ft. 08 in.	36 ft. 06 in.	37 ft. 04 in.	38 ft. 02 in.	39 ft. 00 in.
1	35 ft. 09 in.	35 ft. 07 in.	37 ft. 05 in.	38 ft. 03 in.	39 ft. 01 in.
2	35 ft. 10 in.	36 ft. 08 in.	37 ft. 06 in.	38 ft. 04 in.	39 ft. 02 in.
3	35 ft. 10 in.	36 ft. 08 in.	37 ft. 06 in.	38 ft. 05 in.	39 ft. 03 in.
4	35 ft. 11 in.	36 ft. 09 in.	37 ft. 07 in.	38 ft. 05 in.	39 ft. 03 in.
5	36 ft. 00 in.	36 ft. 10 in.	37 ft. 08 in.	38 ft. 06 in.	39 ft. 04 in.
6	36 ft. 01 in.	36 ft. 11 in.	37 ft. 09 in.	38 ft. 07 in.	39 ft. 05 in.
7	36 ft. 02 in.	37 ft. 00 in.	37 ft. 10 in.	38 ft. 08 in.	39 ft. 06 in.
8	36 ft. 03 in.	37 ft. 01 in.	37 ft. 11 in.	38 ft. 10 in.	
9	36 ft. 03 in.	37 ft. 01 in.	38 ft. 00 in.	38 ft. 10 in.	
10	36 ft. 04 in.	37 ft. 02 in.	38 ft. 00 in.	38 ft. 10 in.	
11	36 ft. 05 in.	37 ft. 03 in.	38 ft. 01 in.	38 ft. 11 in.	

Example: To find draft of ship having a radius-of-turn-of-bilge of 4 ft. 4 in. read across top of table to column headed 4 ft. thence down column opposite 4 in. – read 38 ft. 5 in.

Note: Dead Rise not included in above tabulations and must be added to above readings.

Enclosure 2.

INFORMATION NEEDED PRIOR TO INITIAL TRANSIT THROUGH THE PANAMA CANAL

Bilge Information

Name of vessel .... Date ....
Authorised Tropical Fresh Water Load Line ....
Admeasurer .... Certified as Correct ....
Master – Owners – Agents
1) "A" – Half breadth of vessel to outside of shell ....
2) "R" – Radius of turn of bilge (ft. & in.) ....
3) "DR" – Dead rise at side of vessel (in.) ....

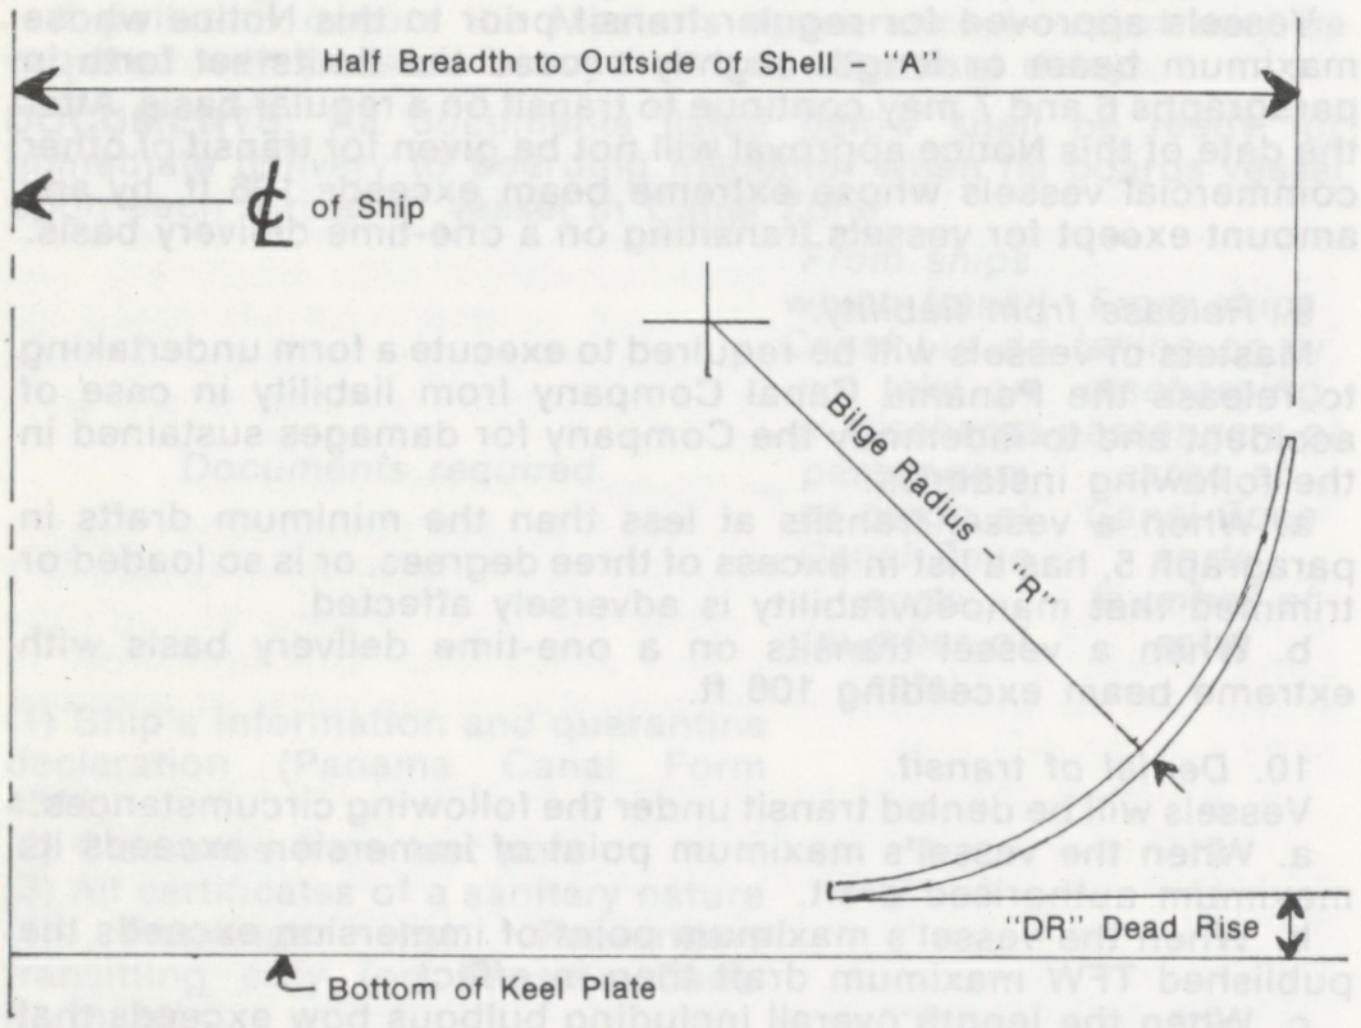

Notes:

1. The Panama Canal Company is not responsible for damage to bilge keels resulting from transit through the locks.

2. On an off centre lockage with the vessel touching the lock wall, the turn of the bilge will clear the lock-wall batters at the most critical point as shown in Enclosure (1).

HEALTH: Application for radio pratique is available to all vessels arriving in Canal Zone waters. Radio pratique is a quarantine clearance by radio, based upon information from the vessel prior to its arrival at Balboa or Cristobal and past experience with the vessel and its personnel. A limited number of vessels will be sampled for compliance with the required standards of health and sanitation on board. The sampling will generally be done on a random basis and will provide a measure of the success of the programme.

It should be emphasised that radio pratique applies only to the quarantine section of the required forms and documents for the Panama Canal. All vessels must still complete the required boarding forms, and in most cases, be prepared to receive the Panama Canal Boarding Inspector on arrival in Canal waters. Such forms as crew and passenger lists, ship's information forms, and the cargo declaration must always be completed for presentation to the Panama Canal officials.

Attached is a listing of the items to be reported prior to arrival in the Canal Zone. The information is similar to that now required of vessels requesting radio pratique in U.S. ports. In addition, there are some special circumstances in the Canal Zone that make additional information necessary.

The manner of reporting the information required should be clear and orderly as specified in 35 CFR, section 123.4, listing information required in advance. The request for radio pratique should originate from the Master and can be submitted directly by radio or through the vessel's local Agent. The local Agent should submit his request with all the required information to the Quarantine Office at the port of arrival of the vessel. The local Agent will be notified when radio pratique is granted or refused and the Agent will communicate this information to the ship.

It is hoped that vessels will take advantage of radio pratique when arriving for transit or docking at the Canal Zone ports of Balboa and Cristobal, and that in as many instances as possible it may be able to grant this time saving privilege.

Radio Pratique Programme

1. *General*

(a) The granting of radio pratique is a Health Bureau responsibility designated to the Division of Public Health. (35 CFR 61.264) which see below.

§61.264 Radio Pratique; vessels only.

The quarantine officer in charge may grant pratique by radio to a vessel upon the basis of information regarding the vessel, its cargo and persons aboard, received prior to arrival of the vessel, when in his judgement, and in accordance with instructions by the Chief, Division of Preventive Medicine and Quarantine, the entry of the vessel will not result in the introduction, transmission or spread of communicable diseases.

(b) In order to process the details of this programme more expeditiously, communication may be held between the quarantine offices and the ship's Canal Zone Steamship Agent representing the vessel hereinafter called local Agent.

(c) All vessels coming to the Panama Canal may request radio pratique by means of the ETA radio message or through the ship's local Agent.

(d) Requests for radio pratique may be submitted to the quarantine office at the port of arrival at least 24 hours and not more than 48 hours before vessel is scheduled to arrive.

2. *Specific Requirement for Each Voyage*

(a) The vessel will be maintained free from rats and vermin.

(b) The Derating Certificate or Derating Exemption Certificate must be valid (i.e. date of issue not more than 180 days prior to date of arrival at the Panama Canal).

(c) Vessels arriving within 15 days from the ports designated in the Aedes Aegypti Indices Bulletins must be disinfected with the aerosol described in the Aedes Aegypti Indices Bulletin No. 8, 1970.

(d) The restrictions imposed in 61.281 through 61.302, "Importation of Certain Things", Title 35 CFR, must be strictly adhered to and followed.

3. *Action taken by the Quarantine Offficer in Charge**

(a) Radio pratique *may* be granted by the quarantine office upon request from the vessel or through the ship's local Agent representing the vessel provided it is documented by ship's radio.

(1) If the information requested in the Appendix hereto is complete; *and,*

(2) If the Quarantine Officer in charge* is of the opinion that the vessel is reasonably free from any condition either from a health or sanitation standpoint that might introduce illness into the Canal Zone.

(b) Radio pratique may be denied by the Quarantine Officer in charge:

(1) If the requested information is incomplete; or,

(2) If the Quarantine Officer in charge* feels that medical or sanitary reasons prevail requiring careful inspection upon arrival of the vessel.

*Or designated representative.

4. *For Sampling and Surveillance of Compliance Purposes*

After the information supplied by the Shipmaster has been reviewed the Quarantine Officer in charge* will advise the ship's local Agent concerned whether radio pratique has been granted or denied and if any restrictions or limitations have been imposed. He will also inform the Marine Traffic Controller, and the Immigration and Customs office whether radio pratique has been granted or denied.

*Or designated representative.

5. *Action taken by Ship's Local Agent*

(a) The ship's local Agent may submit requests for radio pratique to the quarantine office if the vessel has not done so by radio. The information required is listed in the Appendix hereto. Such requests should be submitted, properly documented by ship's radio, not later than 24 hours before the vessel is scheduled to arrive nor earlier than 48 hours before the expected arrival of the vessel.

(b) The ship's local Agent will advise the vessel which he represents whether radio pratique has been granted or denied; and any restrictions or limitation imposed.

6. *Action taken by Panama Canal Company Boarding Inspectors*

On vessels that have been granted radio pratique, the Panama Canal Company Boarding Inspector will:

(a) Ascertain that the Ship's Master has completed the Ship's Information and Quarantine Declaration (Form 4398) *except* the "quarantine data" portion at the bottom of the form; and,

(b) Otherwise process the vessel (e.g. for Immigration, Customs, Admeasurement, and any other non-quarantine requirements) without any further questioning on quarantine matters. This processing may be either in the bay or at the dockside at the discretion of the Admeasurer Watch Supervisor. By agreement with the Chief Immigration Service, passengers that are disembarking from vessels may be processed by the Immigration Service at the docks.

(c) Vessels that are denied radio pratique or have failed to request radio pratique, will be cleared through Quarantine by the Panama Canal Company Boarding Inspector in the prescribed routine manner.

7. *Action taken by Shipmasters*

(a) Shipmasters should request radio pratique directly by radio or

through the Agent representing them in the Panama Canal Zone and supply the information requested in the Appendix hereto.

(b) Shipmasters should take cognizance of the requirements listed in paragraph 2, "Specific requirement for each voyage", above.

(1) If granted radio pratique, they may enter the anchorage area or a Canal Zone port flying the quarantine flag; they must however comply with any restrictions or limitations imposed by the Quarantine Officer in Charge.

(2) Unless the boarding of docking vessels is scheduled to take place at the pier, vessels *must* await boarding by a representative of the Panama Canal authority.

(3) If denied radio pratique, vessels must be cleared for Quarantine in the prescribed routine manner; that is enter the Canal Zone waters or a Canal Zone port flying the Quarantine Flag and must await processing by the Panama Canal Company Boarding Inspector.

(4) It is important that the Shipmasters remember that in all instances all forms regularly required are to be completed prior to arrival for presentation to the Boarding Inspector.

Appendix

Information required by Quarantine Officer in Charge from Shipmaster requesting radio pratique through ship Agency representing him at the Panama Canal.

Full name of vessel.
Country of registry.
International radio call letters.
Estimated date of arrival and port.
Whether docking at Balboa or Cristobal and reason therefor.
List of ports of call within past 15 days prior arrival.
Report any illness or communicable diseases on board.
Report any death occurring on board since departure from last port and cause, if known or suspected.
Report the number of smallpox vaccinations required.
Report the number of passengers to be disembarked and port of disembarking (e.g. Cristobal or Balboa).
Report the date of the Derating Certificate or Derating Exemption Certificate.
Record the number, kind, and origin of all animals aboard and if any are scheduled for disembarking.
Report the origin or source of the meat in the ship's stores.

Only vessels in the following categories need still be subject to "on board" public health clearance upon arrival at Canal Zone ports:

A. Vessels which, during the 15 days prior to arrival in the Canal Zone ports, have or have had on board passenger or crews with any of the following conditions or symptoms of illness:

1. Temperature of 100° F (38° C) or greater *(a)* which persisted for 2 days or more: or *(b)* which was accompanied or followed by any one or all of the following: rash, jaundice, glandular swelling; *or*
2. *Prolonged diarrhoea* (lasting 1 full day or more).

B. Occurrence of death on board for any reason.

C. Vessels which have been in a country infected with smallpox during the 15 days prior to arrival in the Canal Zone.

D. Vessels which have been in a country infected with plague in the 60 days prior to arrival in the Canal Zone.

RADIO: Balboa Naval Radio NBA.

1. *Signal Stations.* (a) Visual-signal stations established for communication on arrival Canal approaches by International Code and/or flashing light, at seaward end of Pier 6 Cristobal, and on Flamenco Island at Pacific entrance.

(b) Flamenco Island and Cristobal Signal Station also contactable on VHF Channel 12 frequency 156.6 Mc/s., and R/T 2182, 2638 and 2846 kc/s. – call letters WHC.

(c) Vessels of 85 ft. beam and above awaiting transit at Balboa anchorage should keep VHF radio watch on Channel 12 for transit orders.

(d) Arriving ships may communicate with Port Captain's Office, Cristobal through Cristobal Signal Station Radio communication is maintained on international maritime VHF Channel 12 (156.6 Mc/s.) through "Cristobal Radio".

2. *Advance information required by radio from vessels approaching Canal.* Vessels approaching Canal should communicate by radio to the Port Captain, through Balboa Radio Station, call letters NBA, at least 48 hours in advance of arrival in Canal Zone, the information required below. If radio communication can be established earlier than 48 hours in advance of arrival, required information should be furnished at time such communication is first practicable.

(a) All items of information listed below, unless previously communicated through Agents or otherwise to Canal authorities, shall be transmitted to Port Captain using phonetic alphabet letters to identify items, as follows:

ALFA – The Panama Canal Identification Number of the vessel.

BRAVO – Estimated date and time of arrival, port of arrival and request for Canal transit if desired.

CHARLIE – Estimated draft upon arrival, in feet and inches (fore and aft).

DELTA – Any changes in the vessel's name, country of registry, structure, or use of tanks that have occurred since the vessel last called in Canal Zone waters.

ECHO – Will the vessel dock at Balboa or Cristobal? What is the reason for docking? If it is for cargo operations, fuel or water, give the tonnage involved in each case. Is there any other reason the vessel will not be ready to transit upon arrival? What is the reason?

FOXTROT – The nature and tonnage of any deck cargo.

GOLF – If the vessel is a tanker, state names and grades of cargo carried. State names and grades of the cargo last carried in each empty tank which is not gas free.

HOTEL – If the vessel is carrying explosives as cargo, state the grade of each explosive and the amount, in tons of each grade.

INDIA – Quarantine and immigration information:

(1) Is radio pratique desired?

(2) State the ports at which the vessel has called within 15 days preceding its arrival at the Canal Zone.

(3) State all cases of communicable disease aboard and the nature of the disease or diseases, if known.

(4) The number of deaths which have occurred since departure from the last port and the cause of each death, if known.

(5) The number of smallpox vaccinations required.

(6) The number of passengers disembarking and their port of disembarkation.

(7) The number of ports of origin of any stowaway and a brief description of the identity papers of each stowaway.

(8) The number, kind and country of origin of any animals aboard. Are any animals to be landed?

(9) The country of origin of all meat, whether carried as cargo or as ship's stores.

(10) Has the vessel called at a port in any country, infected with foot-and-mouth disease or rinderpest during its present voyage? Countries considered to be infected are:

(a) All countries East of the 30th Meridian West longitude and West of the International Date Line except Australia, Channel Islands, Fiji, Greenland, Iceland, Japan, New Zealand, Northern Ireland, Norway, Republic of Ireland.
(b) All countries of South America;
(c) Curacao (the Leeward Islands of the Netherlands Antilles);
(d) Cuba;
(e) Martinique;
(f) Guadaloupe.

(11) Specify whether the vessel has a valid Derating Certificate or a Derating Exemption Certificate issued 180 days prior to arrival.

The following additional information shall be transmitted via radio to the Port Captain from all vessels as applicable:

(1) Vessels approaching from the Pacific shall report actual time of passing Cape Mala, or the latitude of Cape Mala, and the vessel's speed.

(2) Vessels approaching from the Atlantic shall report 12 hours prior to arrival at Cristobal any change of 1 hour or more in the expected time of arrival.

(3) Any other matters of importance and interest.

Timely receipt of the above information will facilitate the transit or docking of arriving vessels. Failure to comply with these reporting requirements may subject a vessel to delay since vessels which do comply will receive priority of service and handling over those which do not.

DENSITY: On several occasions vessels arriving for transit have been found to be over authorised draft after entering Gatun Lake. Overdrafts in these instances have been caused, it is believed, by assuming fresh water densities different from what actually exists in Canal.

Using distilled water as 1.000 at 3.98°C, water densities have been determined to be as follows:

	Density	
Location	*Gm./cc. 85°F*	*Lbs./ft³ 85°F*
(a) Gatun Lake*	0.9954	62.21
(b) Miraflores Lake†	0.9971	62.32
(c) Balboa Anchorage‡	1.0219	63.87
(d) Cristobal‡	1.0212	63.76

*Fresh water.
†Brackish water.
‡Salt water.

BOILER WATER: May be taken without charge from Gatun Lake subject Pilot's permission and draft.

FRESH WATER: Available Balboa or Cristobal cost about 48 cents per 100 cu. ft.

CERTIFICATES: See "Documents". *(a)* If a valid Derating Certificate or Derating Exemption Certificate is not produced with respect to any arriving vessel the quarantine officer shall:

(1) If he is satisfied that vessel is free of rodents or is kept in such a condition that number of rodents on board is negligible, issue a Derating Exemption Certificate; or

(2) If he is satisfied that a Derating Exemption Certificate should not be issued with respect to such vessel, require derating of vessel.

(b) When, pursuant to paragraph *(a)* (2) of this section, derating has been completed to satisfaction of quarantine officer, he shall issue a Derating Certificate.

CUSTOMS: *Hours:* The regular hours for the Customs inspection of baggage of landing passengers and for the Customs supervision of landing passengers are from 0700 to 1700 hrs. daily, excluding Sundays, and holidays. Such Customs services may be furnished during other hours, or on Sundays and holidays, only upon the request of the Master or authorised Agent.

2. *Marine Protests.* Marine notes of protest may be made and extended by Masters of American vessels before Customs officers without charge.

3. *Allowances.* Tobacco, Wine and/or Spirits at Master's discretion sufficient for immediate consumption. Alcohol not permitted to be taken ashore.

CONSULS:

Great Britain: British Consulate, Colon Office 38-7-7060;

Norway: Royal Norwegian Consulate General: Consul General for Panama, R. P., Terence O. Ford, Office: 28-25-2347. Residence: 28-24-1884.

Norwegian Consul, Cristobal, G. R. Morland, Fenton Bldg. 3-2819.

Norwegian Consul for Pacific Side, Canal Zone, Arne Hauge, Office 2-1965.

Republic of South Africa: Consul for the Republic of South Africa, Henry I. Darlington, Office: 28-23-0834. Residence: 28-23-6779.

Sweden: Royal Swedish Consulate General, Edificio Melinda, Via Argentina, Panama 28-23-9694.

Denmark: Royal Danish Consulate General, Consul General for Panama and Canal Zone, W. Ishoy, Office: 28-25-0524. Residence: 28-24-1537.

Royal Danish Consulate for Colon and Canal Zone, George R. Downing, Office: 38-7-1870. Residence: 3-2361.

Finland: Finnish Vice-Consul, Cristobal/Colon, Donald Francey, Fenton Bldg. 3-1781.

REPATRIATION: Crew members, of vessels other than vessels of United States registry or enrolment signed on before a shipping commissioner, may be discharged in Canal Zone only with consent of the Immigration Service. Before such consent may be given, the Chief Immigration Inspector at port concerned shall be furnished a memorandum in triplicate showing name, age, nationality, and rating of the crew members proposed to be discharge.

When crew members are signed on a vessel, other than crew members signed on a vessel of United States registry or enrolment by a shipping commissioner in the Canal Zone, a memorandum in triplicate showing name, age, nationality, and rating of crew members signed on shall be furnished to Chief Immigration Inspector at the port concerned.

Arriving crew members and particularly visiting Superintendents should if possible possess Panamanian visas.

AIRPORT: Tocumen International Airport located outside Panama City, 18 miles from Balboa; 48 miles from Cristobal, served by all major scheduled international airlines operating in Southern hemisphere.

HOLIDAYS: Sunday, January 1; February 22, Good Friday; May 30; July 4; First Monday in September; November 3; November 11; Thanksgiving Day; December 25; and such other days as may, pursuant to law, be declared to be holidays.

TIME: EST. No alterations to clocks necessary throughout the year.

LOCKS: Gatun Locks (Atlantic side) raise and lower vessels 85 ft., Miraflores (nearest to Pacific) 54 ft. and Pedro Miguel (Pacific side) 31 ft.

AUTHORITY: Marine Director, Panama Canal Company.

AGENT: See "Cristobal".

PUERTO ARMUELLES (Chiriqui): 08.17 N. 82.52 W. (See Plan Book)

LOCATION: Puerto Armuelles is located on the Pacific coast of the Republic of Panama.

Puerto Armuelles is a port solely used for the export of bananas, is operated by United Brands Co., and administered by the National Port Authority of Panama.

DOCUMENTS: Same documents and the same procedure as Almirante.

PILOTAGE: United Brands Company has a Pilot who is available 24 hours of the day. Pilotage consists in mooring the vessel at the quay from the anchorage, for which the vessel must position a ladder on the port side. The pilot launch is white and has no VHF radio. The mooring operation is fairly complicated and United Brands provide a gang of men who board the vessel and manipulate the cables used in the mooring process. Mooring at the quay is always done on the starboard side of the vessel and the bow must be pointing out to sea.

The Pilot must be contacted by the ship's Agent and requested by the vessel by VHF radio on Channel 12 to the Port Authority or Channel 16 to United Brands Co.

ANCHORAGE: Vessels may anchor half a mile from the pier, where there are depths of 120 ft. However, due to the great depth of water in front of the quay, care must be taken in letting out the anchor, it being necessary to find places where the water is not so deep.

It is recommended that for Captains of vessels arriving for the first time in the port ask for the Pilot when anchoring.

There is no type of aid to navigation indicating the best place to anchor.

RESTRICTIONS: Puerto Armuelles is located in the Bay of Charco Azul, where there are great depths making it unnecessary to have aids to navigation. Access to the port is free of sandbanks or any other obstruction to navigation. There are therefore no restrictions for vessels wishing to enter the port, except on the quay itself.

HEALTH: The vessel is boarded by the doctor in the operation of clearance. In the event of illness on board, the Port Authority must be advised on VHF Channel 12 and the vessel must wait at the anchorage for the doctor's visit.

RADIO: A radio service exists via telegraphic cables operated by Tropical Radio Telegraph Co. The Port Authority has VHF/FM equipment which receives calls on Channel 12. United Brands Co. also has VHF and receives calls on Channel 16. The range of these stations is 50 nautical miles. The Port Authority also has SSB equipment which takes calls on frequency 7447.5 KHz.

TUGS: None available.

BERTHING: The quay consists of a pier with a single berth 137 m. long and 40 ft. minimum depth. Vessels must moor on the starboard side.

The quay has 4 banana loaders with a loading capacity of 42 boxes of bananas per minute, each weighing 42 pounds. There is no other type of loading equipment.

Since the quay is located in a position open to the sea a set of 3 mooring buoys is used to keep vessels away from the N.E. side of the pier.

STEVEDORES: Loading and discharging work is carried out by the Union of Port Workers. The vessel's Agent must contract the services of the workers via United Brands Co.

FRESH WATER: Supplied at the rate of 2 t.p.h.

FUEL: Diesel fuel can be supplied by pipe-line from the pier.

REPAIRS: No facilities available.

PROVISIONS: Can be obtained locally or in the town of David 100 kms. away.

TIME: GMT less five hours.

CONSULS: Costa Rica, Nicaragua, Colombia.

MEDICAL: There is a modern hospital in Armuelles.

POLICE/AMBULANCE/FIRE: Available in Armuelles.

CUSTOMS ALLOWANCES: See "Almirante".

TELEPHONE: Micro-wave connects Armuelles with any country in America or Europe. No facilities for telephones on board vessels.

OPENING/CLOSING HATCHES: Carried out by port workers.

DENSITY: 1.0219 gm/c.c. at 85°F.

SHORE LEAVE: No restrictions.

REPATRIATION: Can be effected without difficulty.

AIRPORT: Armuelles has a small airstrip for light aircraft. However, the town of David 100 kms. away by road from Armuelles has a larger airport. There are 2 daily flights by local commercial lines between David and the airport of Tocumen in Panama; thus repatriation can be effected without difficulties.

AUTHORITY: National Port Authority.

VACAMONTE: 08.52 N. 79.40 W. (See Plan Book)

LOCATION: The fishing port of Vacamonte (under construction) is located 27 km. S.W. of Panama City, in Arraijan District, Province of Panama. The port has been programmed to begin its operations on April 1st, 1979.

FACILITIES: The following facilities will be available:

Shrimp fleet: 2 jetties that will permit 8 vessels to unload shrimp simultaneously and/or servicing. 2 service jetties for water and fuel facilities and to carry out minor repairs, with a capacity of 48 vessels. 1 synchrolift with a capacity of 250 tons and 1 ship repair yard for 20 vessels.

Fresh Fish Market: Will have 1 marginal jetty with a capacity to berth 8 vessels simultaneously to unload fish and for servicing.

The Vacamonte fishing port has access to Panama City and to the interior of the country by the Inter-American Highway. In addition to this, at present a modern expressway is being constructed to connect Panama City with the port and with the City of Chorrera.

Vacamonte will be considered within a few years, as the most complete port for the operations of the International Tuna Fleets.

Initially the port will have a cold storage room with a capacity for 3,000 tons. Its "T" shape jetty will permit the unloading of 4 tuna vessels or more with drafts of 7.0 m., if they moor at berth bow to stern.

Fuel and fresh water will be available.

Ship chandlers will be available from Panama City, 30 minutes away by road.

Vacamonte is located 20 kms. Southwest of Balboa. Panama City is served by a modern airport with connections all over the world.

Papua New Guinea

GENERAL:

APPLICABLE TO ALL PORTS IN PAPUA NEW GUINEA
(See also details under individual ports) **(See Plan Book)**

DOCUMENTS: International conditions i.e. at the first port of call in Papua New Guinea the following inward Customs documents are required to be handed to Customs Department within 24 hours of ship's arrival.

- 3 Copies Inward Passenger List.
- 7 Copies Inwards Customs Manifest.
- 3 Copies List of Crew.
- 3 Copies Articles in private possession of officers and crew Form 5.
- 3 Copies Stores List.
- 2 Copies Immigration Restriction Ordinance List (Form 6) being complete list of passengers disembarking and in transit.

If other than first port of call:

- 3 Copies Inward Passenger List.
- 7 Copies Inwards Customs Manifest.

Outward Customs Clearance from last port of call.

RESTRICTIONS: Night berthing is not recommended, but is possible at the discretion of the Port Authority.

HEALTH:
(a) Vessels Arriving Directly from Australia. Pratique is given by radio to vessels which voyage directly from Australia to a Papua New Guinea port, Master of vessel notifies Quarantine Officer at the port of entry to which he is proceeding of ETA, the number of passengers and crew and whether there is any sickness aboard. This notification from Master is sent not longer than 24 hours and not less than 12 hours of ETA. If there is no sickness aboard a reply is sent stating that pratique is granted, and when a vessel arrives the actual pratique form is delivered to Master of vessel or to Collector of Customs to hand to Master. Full pratique is given.

(b) Vessels Arriving from a Foreign Port. All vessels which arrive from a foreign port must anchor in the designated position and await arrival of a Quarantine Officer who boards the vessel by himself – no other person (except a Pilot) is to be allowed on board vessel until pratique has been granted. If a Pilot is on board he must remain on board until pratique is granted.

Smallpox: All passengers and crew are required to be in possession of a valid International Certificate of Vaccination against smallpox on arrival in the country.

Cholera: All passengers and crew are required to be inoculated against cholera if the vessel is expected to arrive at a port in the country within 7 days of leaving an area where cholera is either endemic or is present.

Note: The presence on board of a qualified doctor will normally assist in the granting of pratique.

RADIO: 2 radio stations are available.
(a) Port Moresby Radio – Call sign P2M operating between the hours of 2100 – 1000 hrs. GMT.
(b) Rabaul Radio – Call sign P2R operating 24 hours per day.
These stations are generally used for all contact with agents or Government Departments, etc.

VHF: VHF services are available in three (3) ports only.
(a) Port Moresby on Channel 16 – Call sign "Fairfax Harbour" for the Pilot and "Moresby Harbour Control" for the Port Office.
(b) Lae on Channel 16 – Call sign "Lae Harbour Control".
(c) Anewa Bay on Channels 6, 12 and 15 – Call sign "Anewa Bay Pilots".
Normal working hours are 0745 till 1606 hrs. local time, except for Anewa Bay where hours are 0700 till 2300 hrs. local time

RADAR: No port radar services exist in Papua New Guinea.

TUGS: Berthing. Tugs are available in Port Moresby and Anewa Bay. A small tug is also available in Lae but is low powered.

CRANES: There are no wharf mounted cranes in Papua New Guinea, however, mobile cranes are available in most main ports capable of lifting up to 20 tonne containers. Shippers are advised though to check this before shipping and with heavier loads prior advice and approval must be sought from the relevant Port Authority.

BULK CARGO FACILITIES: Except for Anewa Bay (copper concentrate) and the Jant Wharf at Madang (Woodchip), no bulk cargo facilities exist in Papua New Guinea. (Details of the above are given in the appropriate port summaries).

CONSULS: The following Consulate and Commission services are available.

American Consulate General, P.O. Box 3492, Port Moresby.	Phone 242726
Australian Consulate General, P.O. Box 1180, Lae.	Phone 423000
Australian High Commission, P.O. Box 9129, Hohola.	Phone 259333
British High Commission, P.O. Box 739, Port Moresby.	Phone 243331
Commonwealth Secretariat, P.O. Box 914, Port Moresby.	Phone 243825
Fiji Honorary Consulate, P.O. Box 6144, Boroko.	Phone 254185
German Honorary Consulate, P.O. Box 1549, Boroko.	Phone 256311
Indonesian Embassy, P.O. Box 7165, Boroko.	Phone 253116
Italian Consulate, P.O. Box 276, Lae.	Phone 422593
Embassy of Japan, P.O. Box 3040, Port Moresby.	Phone 242855
Netherlands Honorary Consulate, P.O. Box 1626, Boroko.	Phone 255149
New Zealand Commission, P.O. Box 1144, Boroko.	Phone 242031
Phillipines Consulate, P.O. Box 172, Port Moresby.	Phone 242703
Sweden Honorary Consulate, P.O. Box 1228, Boroko.	Phone 255411

MEDICAL: Medical attention is available in most Papua New Guinea Ports, however as much advance notice as possible should be given by contacting the nearest radio station.

DRY DOCK: No dry dock or major repair facilities exist in Papua New Guinea.

GANGWAY WATCHMEN: Not usually necessary.

HATCHES: Opening/closing usually carried out by crew.

CUSTOMS ALLOWANCES: Entry regulations permit 200 cigarettes or 1lb of tobacco, and 40 oz of wines or spirits.
Crew members may hold 200 cigarettes and 1 carton of beer (or 1 bottle of spirits) out of bond per week.

CARGO GEAR: Wharf equipment supplied by stevedores, load/discharge by ship's gear.

REPATRIATION: Possible, but not recommended.

TIME: Local time in all port is 10 hours ahead of GMT.

HOLIDAYS: The only days on which cargo cannot officially be worked are Good Friday and Christmas Day.

TELEPHONES: Not available at present for ship to shore connection.

SHORE LEAVE: Crew members are allowed ashore.

IDENTIFICATION CARDS: Generally a seamans book is held at the main entrance to the port. Individual passes are not normally required for crew.

BERTH RESERVATIONS: A berth reservation system applies for all overseas vessels at all Papua New Guinea Harbours Board ports.
At Anewa Bay cargo vessels must vacate berth for concentrate carriers.

AITAPE: 03.08 S. 142.21 E. (See Plan Book)

(See General section on Papua New Guinea ports).

PILOTAGE: Not available.

TUGS: Not available.

RADIO: Communications not available.

BERTHING: Position of wharf 03° 08.51′ S., 142° 21.24′ E. Length of berthing head 18.3 m. (60 ft.). Width 6.2 m. (20.3 ft.). Height of deck above L.A.T. 2.5 m. (8.3 ft.). Minimum depth of water at L.A.T. at wharf head 4.3 m. (14 ft.) – subject to seasonal change. Maximum tidal range 1.4 m. (4.6 ft.)

STEVEDORES: *Working hours:* 0700 – 1200 hrs., 1300 – 1800 hrs.

FRESH WATER: Not available to ships.

FUEL: Not available.

CUSTOMS ALLOWANCE: 200 cigarettes or 250 grams tobacco. 1 litre of spirits or 1 litre of wine or 6 beers (total 4.5 litres) for each 7 days. Aitape is not a port of entry.

AUTHORITY: Port Manager.

ALOTAU: 10.19 S. 150.27 E. (See Plan Book)

(See General Section on Papua New Guinea Ports)

PORT LIMIT: Seaward Boundary: From a position in 10° 20′ S. 150° 26′ E. bounded on the West by a straight line due North to the coastline. From the same point bounded on the South by a straight line due East to a position in 10° 20′ S. 150° 28′ E. thence bounded on the East by a straight line due North to the coastline.

PILOTAGE: Pilotage is not compulsory. There are no pilots stationed at Alotau but a pilot will attend from Port Moresby given 48 hours notice of the ship's estimated time of arrival.
Pilot boarding ground: With the light structure on the extreme West point of Sanderson Bay bearing 030° (T) distant 1,000 m.
ETA to be sent not less than 12 hours prior to arrival via Port Moresby Radio (P2M) and to be confirmed not more than 5 hours and not less than 4 hours prior to arrival again via Port Moresby Radio (P2M).

ANCHORAGE: There are no recommended anchorage areas for large vessels in the vicinity of Alotau.

TUGS: Not available.

BERTHING: Overseas wharf is 93 m. long, height of deck above L.A.T. 2.4 m., minimum depth of water at face at L.A.T. 10.0 m. Tidal range 1.1 m. (3.5 ft.).
Vessels may berth either port or starboard side to at the discretion of the Port Authority.
Load/discharge is by ship's own gear (except under special arrangement).
Coastal Wharf: Length 55.8 m. (183 ft.). Minimum depth of water 4.9 m. (16 ft.).

STEVEDORES: 72 hours notice preferred, but a minimum of 24 hours required.

TANKERS: Discharge facilities are not available.
FUEL: Road tanker available from Caltex.
FRESH WATER: Available in limited quantities and restricted periods of the year. Prior application to be made to the Port Manager.
REPAIRS: No facilities available.
AIRPORT: Gurney Airport approximately 20 km. from Alotau is served regularly but not daily.
POLICE/AMBULANCE/FIRE: Police: Alotau 555. Hospital: (No separate Ambulance) Alotau 525. Fire: Service shortly to be in operation.
DELAYS: Delays at Alotau are most unlikely.
DEVELOPMENTS: Alotau is a new port and no further developments are likely in the foreseeable future, except a coastal barge ramp.
GENERAL: Covered Storage Area for Overseas Cargo – 1,874 sq.m. Open Storage Area – 7,640 sq.m.
AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Alotau.

ANEWA BAY: 06.11 S. 155.32 E.

(See General Section on Papua New Guinea Ports)

PORT LIMIT: Seaward Boundary: A line joining the Southern end of Takenupei Island and Karikiberia Shoal.
PILOTAGE: Compulsory. The pilot boarding ground is North of a line joining Takenupei Island and Karikiberia Shoal.
ANCHORAGE: Anchorages are available at Port Authorities advice.
VHF: Anewa Bay Pilots Channel 6, 12 and 16.
TUGS: Available.
BERTHING: Wharf is 77 m. long with mooring dolphins 59 m. Eastward and 59 m. Westward. The maximum draft permitted alongside is 12 m. and a d.w.t. of 40,000 tonnes.

Vessels may berth either port or starboard side to although normally the latter. Load/discharge is by ship's own gear (except under special arrangement).

STEVEDORES: The Port Authority operate their own stevedoring functions.

Working Hours: 0700–1500 and 1500–2300 hrs.

TANKERS: A bulk oil discharging gantry is sited at the Western end of the overseas wharf. Mooring dolphins are located 59 m. and 107 m. Eastward and 59 m. Westward of the wharf.
FUEL: Bunker facilities are not available.
FRESH WATER: Available up to a limit of 250 tonnes delivered at a rate of 25 t.p.h., subject to seasonal availability.
REPAIRS: No facilities available.
AIRPORT: Aropa airport is 32 km. distant and is served daily by Air Nuigini.
POLICE/AMBULANCE/FIRE: Police: 951222. Ambulance: 956166. Fire: 951333.
DELAYS: Delays are only likely if an ore carrier should make port and the consequent priority system is applied.
DEVELOPMENTS: Enlargement of general cargo facilities are planned by the Port Authority.
GENERAL: Covered Storage: 5,130 sq.m.
SHIPMASTER'S REPORT: 1975

Documents:

Crew List. (2 Copies of Papua & New Guinea forms to be filled in on arrival at pilot station).

Ship's Stores List. (2 copies of P.N.G. forms to be filled in on arrival at pilot station).

Crew Declaration Form: – (2 copies of P.N.G. Form 5 – Articles in Private Possession of Officers & Crew to be filled in on arrival at pilot station).

Vaccination Certificates of all crew members for sighting.

Pilotage: Two Pilots, employees of the Bougainville Copper Company Ltd., are available 24 hours a day. Pilot boards in position 06° 07′ S. 155° 35′ 18″ E. Pilot vessel is a small tug called the "Loloho", which has a dark blue hull and white superstructure. Pilots listen on VHF Channels 6 and 16. ETA's will have been passed to the Pilots by the ship's Agents, as per charter party, but pilot boat should be advised by VHF when vessel is two hours and one hour respectively from Pilot station. Channel 6 is monitored by Pilots Monday–Friday, 1730–0215 hrs. and when vessels are expected. Pilotage is compulsory.

Max. Size: Restriction mainly on draft. Least water on berth is 40 ft. Although the problem has not as yet arisen, max. length is also restricted to about 700 ft.

Pratique: Immigration officer boards as vessel berths. International Code of Signals "Q" flag should be exhibited on arrival off port. Same officer deals with customs clearance.

Radio: ETA's to Pilots are best routed through Rabaul Radio, call sign P2R, who will pass the message direct to the Pilot office. Honiara Radio may also be used for messages to the ship's Agents.

Tugs: Only one tug, the "Loloho", is available. This is a very small tug which "assists" vessels when berthing and unberthing. No lines used. Tug of little use to larger vessels.

Berthing: Only one berth in the port, with a least depth of 40 ft. alongside. The berth is used for the loading of copper concentrates and the discharge of general cargo and containers. Vessels intending to load copper concentrates should ensure that their hatch covers are not more than 36 ft. above the water line on arrival, to enable the loader to be positioned over her holds. In some cases ballast hatches may have to be left filled until after loading has commenced. The berth is approached at an angle of 45° and a mooring boat will take one head rope ashore first. The back spring should be sent ashore by heaving line as soon as possible. All vessels berth starboard side to the quay. The berth itself is 250 ft. long. Dolphins stand 175 ft. Westward and 135 and 310 ft. Eastward of the ends of the wharf. The ore loader is not a movable fixture, and vessels are required to shift up and down the wharf to facilitate loading concentrates at the requisite hatches. When leaving the wharf the vessel is sprung off, using one head rope and the backspring.

Stevedores: Normal cargo hours for vessels loading are 0600 – 2300 hrs. but in cases where required cargo will be worked 24 hours a day. Stevedores are employees of the Bougainville Copper Company. Approx. loading rate for concentrates 750/1,000 t.p.h. Stevedores will render all possible assistance in shifting ship. For vessels discharging, mobile cranes capable of lifting up to 140 tonnes are available. Shore gangway is normally used.

Medical: There are good hospital facilities in both Anewa Bay itself and also in nearby Kieta. Advanced notice of required medical attention not normally necessary.

Tankers: Tankers are also discharged at Anewa Bay's only wharf. As with other vessels, draft is restricted to 40 ft., and length to about 700 ft.

Density: Varies between 1022 and 1025 according to season and amount of rainfall recently experienced.

Fresh Water: Available on the wharf except during periods of drought. Supplied by 3 in. hose at approximately 60 t.p.h. Can only be supplied at main wharf (not at Dolphins) and it is therefore sometimes necessary when loading concentrates to wait until after hatches are being loaded before hose can be put aboard.

Fuel: Not available.
Consuls: None.
Repairs: No facilities.
Dry Docks: None close by.
Surveyors: None.
Hatches: Steel hatch covers to be opened and closed by crew.
Customs Allowances: 200 cigarettes and one bottle spirits per person.

Repatriation: Regular flights from Kieta Airport (24 kms. distant) to Port Moresby, where possible to link up with international flights. Repatriation can therefore easily be arranged from this port.

Time: GMT plus 10 hours.

Shore Leave: All crew members are allowed ashore. No shore passes required.

Delays: No delays normally experienced, but possible up to 24 hours max.

General: Berth very exposed to S.E'ly winds. Moderate ground swell experienced on berth at times. Considerable rain experienced throughout the year, mainly during the night and early morning.

AUTHORITY: Bougainville Copper Ltd., Panguna, Bougainville. Port Superintendent/Harbour Master, Arawa, Bougainville.

BUKA: 05.26 S. 154.40 E. (See Plan Book)

(See General Section on Papua New Guinea Ports)

PILOTAGE: Not available.
TUGS: Not available.
RADIO: Not available.
BERTHING: Wharf position: 05° 26′ S., 154° 40.4′ E. Length 31.4 m. (103 ft.) Width 5.2m. (17 ft.). Berthing dolphins 9.2 m. (30 ft.) off each end. Height of deck above MLW 2.22 m. (7.3 ft.). Minimum depth of water at MLW 3.65 m. (12 ft.).
FRESH WATER: Not available.
FUEL: Not available.
CUSTOMS: Not Port of Entry.
AUTHORITY: Port Manager, Kieta.

DARU: 09.04 S. 143.12 E. (See Plan Book)

(See General Section on Papua New Guinea Ports).

PILOTAGE: Not available.
RADIO: Not available.
TUGS: Not available.
BERTHING: Position of wharf: 09° 04′ S. 143° 12.6′ E. Length of wharf head 29.6 m. (97 ft.). Average width 12.2 m. (40 ft.). Height of deck above LAT – 4.8 m. (15.7 ft.) min. depth of water LAT 2.4 m. (8.0 ft.)

The wharf head is connected to the shore by a wharf bridge length 120 m. (394 ft.) and causeway 220 m. (720 ft.).

FRESH WATER: Not available.
FUEL: Available by road tanker. Supplier – Caltex.
CUSTOMS: Port of Entry.
AUTHORITY: Port Manager.

KAVIENG: 02.35 S. 150.48 E. (See Plan Book)

(See General Section on Papua New Guinea Ports)

PORT LIMIT: Seaward Boundary.

Large vessels should approach from the Nusa Channel where the port limits are as follows:

From the beacon on Cape Siwusat by a straight line 220° (T) to the extreme North point of Usien Island thence by a straight line due West to position in 2° 37.87′ S., 150° 44.57′ E., thence by a straight line due North to the Western extremity of Edmago Island. From the Eastern extremity of Edmago Island the line of the port limit crosses the Eickstedt Passage in the direction 253° (T) to the Southern extremity of Nago Island.

PILOTAGE: Pilotage is not compulsory but a Pilot will attend from Rabaul given 48 hours notice of the ship's estimated time of arrival.

Pilot Boarding Ground: The Eastern extremity of Edmago Island bearing due North 900 m.

ETA to be sent not less than 12 hours prior to arrival via Rabaul Radio (P2R) and to be confirmed not more than 5 hours and not less than 4 hours prior to arrival again via Rabaul Radio (P2R).

ANCHORAGE: Anchorage may be obtained in sand depth 20 m. in a position East Reef Light structure bearing 042° (T) distant 890 m.

RADIO: Not available.

TUGS: Not available.

BERTHING: Overseas wharf is 93.8 m. long, height of deck above L.A.T. 2.7 m., minimum depth of water at face at L.A.T. 7 m. Tidal range 1.2 m.

Vessels may berth port or starboard side to at the discretion of the Port Authority.

Load/discharge is by ship's own gear.

STEVEDORES: 72 hours notice preferred, but a minimum of 24 hours required. Working hours: Day shift 0800–1200, 1300–1600 hrs. Evening shift 1600–1900, 2000–2400 hrs.

FUEL: Bunker facilities available for diesel at wharf from Caltex and Shell

FRESH WATER: Available in limited quantities, prior application to be made with the Port Manager.

REPAIRS: No facilities available.

AIRPORT: Kavieng airport is some 5 km. from the wharf and is served by daily Air Nuigini flights.

POLICE/AMBULANCE/FIRE: Police: 941222. Ambulance: 941234. Fire: 941222.

DELAYS: Delays at Kavieng are most unlikely.

DEVELOPMENTS: Development of Kavieng port is not envisaged at present.

GENERAL: Covered Storage Area: 750 sq.m. Open Storage Area: 3,000 sq.m.

AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Kavieng.

KIETA: 06.13 S. 155.38 E. (See Plan Book)

(See General Section on Papua New Guinea Ports).

PORT LIMIT: Seaward Boundary

By a straight line bearing 328° (T) from a point in 6° 10′ S., 155° 42.3′ E., on the seaward edge of Gero Reef to a point in 6° 07.1′ S., 155° 40.4′ E., thence due West to a point at the Northern most extremity of Banaru Reef.

PILOTAGE: Compulsory – Daylight hours only.

Pilot boarding ground: 6° 07.6′ S., 155° 40.3′ E.

ETA pilot boarding ground not less than 12 hours prior to arrival via Port Moresby Radio (P2M) or Rabaul Radio (P2R). Confirm or amend ETA not more than 5 hours but not less than 4 hours prior to arrival again via Port Moresby or Rabaul. No VHF facility.

ANCHORAGE: There are no recommended anchorages for large vessels in Kieta harbour.

VHF: Listening watch maintained during working hours and when ships are expected during non-working hours. Call: Kieta Port Control. VHF Channels: 16, 12, 8, 6.

TUGS: 450 h.p. tug available for hire from Bougainville Copper Pty at Anewa Bay.

BERTHING: Overseas wharf 122 m. long, height of deck above L.A.T. 3.0 m., minimum depth of water at face at L.A.T. 7.5 m. Tidal range 1.7 m.

Vessels may berth either port or starboard side to at the discretion of the Port Authority.

STEVEDORES: 72 hours notice preferred, but a minimum of 24 required. Working hours: Day shift 0800–1200, 1300–1600. Evening shift 1600–1900, 2000–2400.

FUEL: Diesel available from road tanker. Supplier: Shell.

FRESH WATER: Not available to overseas vessels. Coastal vessels may be supplied depending on availability and following prior arrangement with the Port Manager.

AIRPORT: Aropa airport is some 19 km. from the port and is served daily by Air Nuigini.

POLICE/AMBULANCE/FIRE: Police: 951222. Ambulance: 956166. Fire: 951333.

DELAYS: Delays can occur occasionally at Kieta but of fairly short duration rarely exceeding 48 hours.

DEVELOPMENTS: A recent extension to the overseas wharf completes the main development programme for the next few years.

GENERAL: Covered Storage: 2,230 sq.m. Open Storage: 14,720 sq.m.

AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Kieta.

KIMBE: 05.33 S. 150.09 E. (See Plan Book)

(See General Section on Papua New Guinea Ports)

PORT LIMIT: Seaward Boundary.

A line from Gigo Point due North for 1,695 m., thence in a straight line due East for 6,821 m., thence in a straight line due South for 2,438 m. to the Eastern extremity of Telagavu Point.

PILOTAGE: Pilotage is not compulsory but a Pilot will attend from Rabaul given 48 hours notice of the ship's estimated time of arrival.

Pilot boarding ground: 5° 28.7′ S., 150° 13.9′ E.

ETA to be sent not less than 12 hours prior to arrival via Rabaul Radio (P2R) and to be confirmed not more than 5 hours and not less than 4 hours prior to arrival again via Rabaul Radio (P2R). No VHF facility.

ANCHORAGE: There are no recommended anchorage areas for large vessels in the vicinity of Kimbe.

BERTHING: Overseas wharf is 60.9 m. long, height of deck above L.A.T. 3.1 m., min. depth of water at outer face at L.A.T. 10.7 m.

Vessels may berth either port or starboard side to at the discretion of the Port Authority.

Load/Discharge is by ship's own gear (except under special arrangement).

STEVEDORES: 72 hours notice preferred, but a min. of 24 required. Working hours: 0800–1200, 1300–1600, 2000–2400 hrs.

TANKERS: Discharge facilities only, for oil products. Palm oil loading over main wharf.

FRESH WATER: Available on request from Port Manager at a rate of 25 t.p.h., but may be restricted at times during the year.

FUEL: Diesel available by road tanker from Shell and Caltex.

AIRPORT: Hoskins airport is approx. 30 km. distant and is served by Air Nuigini several times a week.

POLICE/AMBULANCE/FIRE: Police: 935022. Ambulance and Fire: No services available.

DEVELOPMENTS: No further development is planned for the port in the near future.

GENERAL: Covered Storage: 745 sq. m. Open Storage: 6040 sq.m.

AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Kimbe.

LAE: 06.48 S. 147.11 E. (See Plan Book)

(See General Section on Papua New Guinea Ports)

PORT LIMIT: From a position Lat. 6° 44′ 12″ S., Long. 146° 59′ 52″ E. 175° T. for 2.2 cables, thence 270° T. for 9.3 cables, thence 017° T. to the shore. Time of arrival at Sugarloaf Anchorage, if berth is not immediately available, is accepted as time of arrival in port.

The Port Limits are due for revision.

PILOTAGE: Pilotage is compulsory – 24 hours a day.

Pilot Boarding Ground: 1,800 m. E.S.E. of Main Wharf.

ETA at Pilot boarding ground not less than 12 hours prior to arrival via Port Moresby Radio (P2M) or Rabaul Radio (P2R). Confirm or amend ETA not more than 5 hours and not less than 4 hours prior to arrival (VHF Channel 16 – call Lae Port Control then to Channel 12 or 6 for working Channels.)

ANCHORAGE: Safe anchorage is available about 3 miles from Main Wharf in the Huon Gulf Area, called Sugarloaf Anchorage, at approximately 1.5 miles offshore between beacons:

Northern Beacon: Lat. 6° 47′ 10″ S., Long. 146° 57′ 20″ E.
Southern Beacon: Lat. 6° 48′ 20″ S., Long. 146° 57′ 06″ E.

Holding ground is good and 11 fathoms is found just South of the line with Northern Beacon bearing West True 1.5 miles distant. The depth varies within a fathom or two in seasons on account of the soft bottom.

Medium sized vessels up to 100 m. LOA may find safe anchorage 1.5 cables from N.W. end of the Overseas Wharf in position 6° 44′ 03″ S., 156° 48′ 8″ E. Depth of water 9.14 m.

RESTRICTIONS: Except for LPG and tankers, vessels berth and sail any time of the day or night, depending on availability of berths and number of vessels waiting for a berth.

RADIO: Radio contact is made through Port Moresby Radio or Rabaul Radio on 6280 kc/s.

VHF: Call sign "Lae Port Control", Channels 16, 12, 8 and 6. Watch maintained during normal working hours and outside hours when a vessel is expected.

TUGS: A 450 h.p. tug and 2×6.4 m. steel work boats are available for running lines to wharf and shore bollards.

BERTHING: Overseas wharf is 430 m. long, height of deck above L.A.T. 2.7 m., min. depth of water at face at L.A.T. 11.0 m. Max. draft 9.7 m.

Vessels may berth either port or starboard side to at the discretion of the Port Authority. Provided anchorage in Milfordhaven Bay is clear, ample swinging room is available off the N.W. end of the Wharf.

Load/discharge is by ships own gear (except under special arrangement).

STEVEDORES: 72 hours notice preferred, but a min. of 24 required. Working hours: Day shift: 0800–1200, 1300–1700, 1800–2200. Evening shift: 2200–0200, 0300–0800 (limited gangs).

Advise number of gangs required, hatch tonnages and information of any particular heavy lifts or awkward cargo.

MEDICAL: Maximum possible notice should be given so that full arrangements can be made with regard to hospitalisation, etc. Full hospital facilities are available approximately 2.5 miles from the wharf.

TANKERS: Discharge and bunkering facilities are available for all ship requirements (See Developments).

FUEL: Available.

FRESH WATER: Sometimes restricted but generally available at the rate of 30 t.p.h.

REPAIRS: Only minor repairs can be carried out.

SURVEYORS: Lloyds Agent.

AIRPORT: Lae airport is at present only 3 km. from the main wharf, however the opening of a new airport at Nadzab will be approx. 30 km. distant. Serviced daily by Air Nuigini flights.

POLICE/AMBULANCE/FIRE: Police: 422222. Ambulance: 421211. Fire: 424333.

Fire alarms are connected to the Gatehouse which has a direct telephone link to the Police station for emergency purposes.

DELAYS: Lae is the largest and busiest of the country's ports (except for Anewa Bay) and at times delays for up to 48 hours can be expected.

DEVELOPMENTS: A new tanker discharge and bunkering facility is to be constructed at the East end of the main wharf.

Future development is based on the concept of a tidal basin to the West of the existing facility.

GENERAL: Covered Storage: 13,622 sq. m. Open Storage: 37,000 sq. m.

SHIPMASTER'S REPORT: 1978

Approaches: No difficulties were encountered either approaching or leaving. There is deep water close to the shore. Muddy water from the outflow of the Markham River is encountered off the port, but is of no navigational significance.

Wharf: Modern, well-fendered and convenient. Currents and tides alongside are irregular and unpredictable, being almost entirely influenced by the discharge from the Markham River. A tanker berth, consisting of concrete dolphins, is under construction close Eastwards of the main wharf and a pile-driving barge is operating. When berthing, some vessels use the off-shore anchor but under normal conditions this appears to be unnecessary and can in fact be something of an embarrassment when leaving. We did not use either anchor or tugs, weather conditions being good. Powered line boats are available and were used. There is a depth of water alongside of about 11 m.

Anchorage: The usual anchorage is as described in Pacific Islands Pilot Vol. 1, 9th Edition and Supplement No. 5 of 1976. We lay quietly to the port anchor in 30 m. of water, with 4.5 shackles in the water, in position with the Northern of the 2 beacons shown on Chart Aus. 385 bearing 268°(T) distant 2.1 miles approximately.

It is not customary to take a Pilot for the anchorage.

Pilotage: Compulsory when berthing and unberthing.

Tugs: There are 3 in the port, privately owned. As most of their income is derived from sources other than berthing and unberthing ships, their availability is uncertain. No doubt a vessel requiring a tug or tugs would be able to make advance arrangements.

Communications: Vessel came from Gladstone, Queensland, and our advices were sent through P2M, Port Moresby Radio, no difficulties being encountered.

Pilots and Harbour Control are available on Channel 16, VHF, when shipping movements are expected.

Documents required:

5 Passenger Lists
5 Crew Lists
7 Inward Customs Manifests
3 Lists of Crew Effects
3 Stores Lists
2 Arms and Ammunition Lists

We were able to obtain local forms prior to arrival, and experienced no problems. Also see 'Pratique'.

Officials: The Bond and Beer Rooms are sealed on arrival. The Customs stuck rigidly to the rules and confiscated any undeclared goods, particularly alcohol, cigarettes and what they judged to be pornographic literature. No fines were levied nor charges brought.

The Port Authority allocates berths and decides priorities for vessels.

During our stay, and for a considerable period prior to then, the port had been very busy.

Depending upon the nature of her cargo and the rate of discharge, it is possible for a vessel to reserve a berth in advance.

Because such a vessel arrived when we were alongside and neither our cargo nor our rate of discharge brought us into the berth reservation category, we were obliged to go out to anchor until a berth again became available.

Cargo Working: Our cargo for Lae consisted of 1,524 tonnes of bulk wheat in No. 1 hatch and 9 containers, the heaviest of which was 19.76 tonnes, on No. 2 hatch. The containers were discharged in 3 hours 20 minutes by ship's gear, no problems being encountered.

Our grain cargo was discharged in 36 hours, including time taken rigging and unrigging the sucker and adjusting the length of the suction pipe. Thus, an average rate of 42.3 m/t.p.h. was achieved.

Grain is discharged by means of a portable sucker, weighing approximately 3.5 tonnes, placed on the hatch lids, where it stays throughout discharge. From the sucker, the grain is transferred to a hopper ashore and from there to lorries that transport it to the Mill, about 1 km. away. No significant delays on account of a lack of transport were encountered.

Working Hours: The standard working day is from 0800 hrs. to 2400 hrs. On 2 occasions, once successfully, attempts were made by receivers to start work at 0700 hrs.

The vessel being on Voyage Charter, receivers made strenuous efforts to arrange for discharge after midnight, but without success. They are also investigating making grain discharge an all-weather operation. This could easily be achieved by rigging a tent over the sucker and open portion of the hatch, but whether Union and/or Government Rules would permit this is another matter.

Pratique: If coming from Australia or New Zealand, pratique is not required, nor is a Health Declaration. Nevertheless, radio pratique was requested but no reply was received.

Provisions: Available but very expensive. We stocked up prior to departure Gladstone and this proved to be a wise decision.

Fresh Water: Available from the wharf, at a rate of 15 tonnes per hour. This is well water and not used by the local residents, who collect the rainwater off their roofs. To be on the safe side it was treated with Chloride of Lime.

Repairs: Only minor repairs can be undertaken. We called in a local firm for some non-urgent burning and welding work, but they were unable to do anything due to a products tanker discharging astern of us. The Chief Engineer reports that appearances suggest that competent work would be done, but that prices would be rather high.

Currency: The unit of currency is the Kina. On June 23rd, 1978, the Kina was worth Australian $1.2232 and 75.29 pence sterling.

Weather: Was hot and humid, with temperatures ranging from 23.2°C to 28.2°C. During the afternoons a South-Easterly breeze, about Force 2-3 usually came up, dying away in the evenings. Rain showers were prevalent, night and morning.

Health: Local residents confirmed that malaria is present at Lae and the usual precautions were taken on board.

AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Lae.

LORENGAU: 02.01 S. 147.16 E. (See Plan Book)

(See General Section on Papua New Guinea Ports)

PORT LIMIT: Seaward Boundary.

From the Eastern extremity of Hauwei Island by a straight line due North for 2,050 m., thence by a straight line due East for 2,920 m., thence by a straight line due South for 2,000 m. to the Old Light House on Ndrilo Island.

PILOTAGE: Pilotage is not compulsory but a Pilot will attend from Madang given 48 hours notice of the ship's intention to call at Lorengau.

Advice from an officer of the P.N.G. Defence Force may be obtained for vessels proceeding to Lombrum Naval Base.

Pilot Boarding Ground: Within 400 m. radius of a position with Ndrilo Island Old Light House bearing 127° (T) distant 1,850 m.

ETA to be sent not less than 12 hours prior to arrival via Port Moresby Radio (P2M) or Rabaul Radio (P2R) and to be confirmed at not more than 5 hours and not less than 4 hours prior to arrival. No VHF facility.

ANCHORAGE: Anchorage may be obtained in soft mud in depths of about 30 m. anywhere in Seeadler Harbour but an anchorage in position Bear Point 210° (T) 2,600 m. is recommended.

BERTHING: Nabu wharf at Lorengau is 15.2 m. long with a berthing dolphin 25.9 m. from the Northern end of the wharf. The height of the deck above I.S.L.W. is 2.9 m., minimum depth of water at face at I.S.L.W. 5.1 m.

Nabu wharf is not suitable for large ships but overseas vessels occasionally use the wharf at Lombrum Navy Base in position 2° 02.1′ S., 147° 22.6′ E., which now lies within the declared port of Lorengau.

Berthing at Nabu wharf may be delayed during the N.W. season, December–March.

STEVEDORES: 72 hours notice preferred, but a minimum of 24 required.

TANKERS: Discharge facilities are available at Nabu wharf.

FRESH WATER: Limited supplies available, prior application to be made to the Port Authority.

FUEL: Diesel available from Caltex or Mobil.

AIRPORT: Momote airport is some 45 kms. from Lorengau and is served by Air Nuigini but not daily.

POLICE/AMBULANCE/FIRE: Police: Lorengau 22. Ambulance and Fire: No services available.

DELAYS: Delays at Lorengau are most unlikely.

DEVELOPMENTS: No development for the port is envisaged in the near future except for the erection of a transit shed.

GENERAL: Covered Storage: 780 sq. m. Open Storage: Very little.

AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Lorengau.

MADANG: 05.12 S. 145.49 E. (See Plan Book)

(See General Section on Papua New Guinea Ports)

PORT LIMIT: Seaward Boundary.

By a straight line due East from the Easternmost extremity of Kramket Island to position 5° 11.9′ S., 145° 51.5′ E., thence due South to position 5° 13.5′ S., 145° 51.5′ E., thence by straight line due West to a point on the Easternmost extremity of the Kalibobo (Schering) Peninsula known as Cape Kusseron.

PILOTAGE: Compulsory – Inwards during daylight hours only. Outwards during the hours 0600–2400 hrs.

Pilot Boarding Ground: Within 400 m. radius of a position with the Coastwatchers lighthouse bearing 260° (T) distant 1,800 m.

ETA pilot boarding ground not less than 12 hours prior to arrival via Port Moresby Radio (P2M) or Rabaul Radio (P2R). Confirm or amend ETA not more than 5 hours but not less than 4 hours prior to arrival again via Port Moresby or Rabaul.

ANCHORAGE: Anchorage area is inside the Dallman Passage in the area to the North of the main channel bounded by Beliau Island to the West and Kramket Island to the East. Depth of water, 40 m. Good holding ground in soft mud. Ships should not proceed to anchorage area without Pilot's advice.

VHF: "Madang Port Control" Channels 16, 12, 8 and 6. Listening watch during normal working hours and when vessels expected outside normal hours.

BERTHING: Overseas wharf 137.1 m. long, height of deck above I.S.L.W. 3.1 m., minimum depth of water at face at I.S.L.W. 10.1 m.

Vessels may berth either port or starboard side to at the discretion of the Port Authority.

Load/discharge is by ship's own gear (except under special arrangement).

A separate facility to serve woodchip vessels (and Caltex tankers) only is situated within Binnen Harbour West of the main wharf facilities.

STEVEDORES: 72 hours notice preferred, but a minimum of 24 required. Working hours: 0800–1200, 1300–1800 and 1900–2400.

TANKERS: Discharge at main wharf for both Shell and Mobil. Caltex discharge by floating pipe-line while moored at the Jant woodchip facility.

FUEL: Diesel and diesel fuel available by road tanker from Shell, Mobil and Caltex.

FRESH WATER: Only very limited supply available dependent on season, prior arrangement must be made to Port Authority.

REPAIRS: A coastal slipway at Madang but only minor deck repairs could be carried out to overseas vessels.

SURVEYORS: Lloyds agents, The Manager, Burns Philp (N.G.) Ltd., P.O. Box 605, Madang.

AIRPORT: Madang airport is 6 km. from the port and is served daily by Air Nuigini.

POLICE/AMBULANCE/FIRE: Police: 822222. Ambulance: 822022. Fire: 822777.

DELAYS: Although there is only one overseas berth at the main wharf, Madang delays are not common and are of short duration when they do occur.

DEVELOPMENTS: A new coastal facility has been completed, and when traffic justifies expenditure an extension of the overseas wharf Eastward will be undertaken.

GENERAL: Covered Storage: 25,000 sq.m. Open storage: 5,575 sq.m.

AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Madang.

ORO BAY: 08.54 S. 148.29 E. (See Plan Book)

(See General Section on Papua New Guinea Ports)

PORT LIMIT: Seaward Boundary.

From the extreme North point of the mainland on the South side of the entrance to Port Harvey by a straight line due North for 2,935 m. thence by a straight line due West for 2,760 m. to the coastline.

PILOTAGE: Pilotage is not compulsory but a Pilot will attend from Port Moresby or Lae given 48 hours notice of the ship's intention to call at Oro Bay.

Pilot Boarding Ground: Within 300 m. radius of a position with the North corner of Oro Bay wharf bearing 225° (T) distant 1,850 m.

ETA to be sent not less than 12 hours prior to arrival via Port Moresby Radio (P2M) and to be confirmed not more than 5 hours and not less than 4 hours prior to arrival. No VHF facility.

ANCHORAGE: In sand and mud at 15 m. depth may be obtained on the leading marks 239° (T) distant 400 m. from the North corner of the wharf.

BERTHING: Wharf is 60.3 m. long, height of deck above I.S.L.W. 2.5 m., min. depth of water at outer face at I.S.L.W. 11.4 m.

Vessels may berth either port or starboard side to at the discretion of the Port Authority.

Load/discharge is by ship's own gear (except under special arrangement).

Berthing may be delayed during the N.W. season, December – March.

STEVEDORES: 72 hours notice preferred, but a min. of 24 required.

TANKERS: No discharge facilities exist at present.

FUEL: Diesel available by road tanker from Shell and Caltex.

FRESH WATER: Not available.

AIRPORT: Popondetta airport is 40 km. from the port and is served by Air Nuigini,but not daily.

POLICE/AMBULANCE/FIRE: Police: 297122. Ambulance: No service available. Fire: 297122.

DELAYS: Delays at Oro Bay are most unlikely.

DEVELOPMENTS: The area around Popondetta is being developed as major palm oil plantations and this could eventually lead to expansion of the port.

GENERAL: Covered Storage: 739 sq.m. Open Storage: 4645 sq.m.

AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Popondetta.

PORT MORESBY: 09.28 S. 147.08 E. (See Plan Book)

(See General Section on Papua New Guinea Ports)

PORT LIMIT: Seaward Boundary.

A straight line bearing 300° (T) from a point at the South Western extremity of Nateara Reef to a point at the Southernmost extremity of Sinari Reef.

PILOTAGE: Pilotage is compulsory – 24 hours a day.

Pilot boarding ground: Within 300 m. radius of a position Basilisk Beacon bearing 065° (T) distant 1,500 m. *OR* in bad weather the pilot boarding ground will be withdrawn inside the Basilisk Passage to a position Basilisk Beacon 220° (T) 950 m.

ETA at Pilot boarding ground not less than 12 hours prior to arrival via Port Moresby Radio (call sign P2M).

Confirm or amend ETA not more than 5 hours and not less than 4 hours prior to arrival (VHF Channel 16 – call Moresby Pilot thence switch to Channel 12 for working Channel).

ANCHORAGE: Vessels may, subject to permission being granted by the Pilotage Authority, proceed inwards without a Pilot to an anchorage area in the outer harbour centred in position North Point Manubada Island 090° (T) 1275 m.

Depth of water 27 m. Good holding ground in soft mud and sand.

TUGS: A tug of 650 h.p. available for hire from private operator.

VHF: Call sign "Moresby Port Control" Channels 16, 12, 8 and 6. Listening watch during normal working hours and outside hours when vessel expected.

BERTHING: Overseas berth is 213.3 m., height of deck above. L.A.T. 4.4 m., min. depth of water at outer face at L.A.T. 7.6 m., 4.6 m. on the inner North Eastern arm, 3.8 m. on the inner South Western arm.

The wharf is a "T" head structure and vessels may berth either side to at the discretion of the Port Authority.

Load/discharge is by ship's own gear.

STEVEDORES: 72 hours notice preferred, but a minimum of 24 hours required. Working hours: Day shift: 0800–1200, 1300–1700, 1800–2200 hrs. Night shift: 2200–0200, 0300–0700 (limited gangs).

TANKERS: Tankers may discharge at Oil Company buoys N.W of the wharf area, max. draft 13 m. The discharge is through submarine pipe-lines.

FUEL: Diesel for overseas vessels is by road tanker only.

FRESH WATER: Available at the rate of 20 t.p.h.

REPAIRS: A small slipway for coastal vessels only is situated adjacent to the main wharf.

AIRPORT: Jacksons Airport, Papua New Guinea's only international airport is 13 km. from the wharf and is served by flights to and from Australia daily, to Manila weekly as well as daily flights to all main internal centres.

POLICE/AMBULANCE/FIRE: Police: 252222, 255555, 242000. Ambulance: 256822. Fire: 242255, 255188, 253400.

DELAYS: The main wharf can only just cope with two overseas vessels and consequently in peak periods delays can be expected up to 48 hours.

DEVELOPMENTS: A new deep sea berth backed by land fill reclamation is planned for the area North of the present facility.

GENERAL: Covered Storage: 4710 sq.m. Open Storage Area: 11,150 sq.m.

AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Port Moresby.

AGENTS: Burns Philp (N.G.) Ltd., P.O. Box 75, Port Moresby. Telex NE 22116. Cables: "Burphil Port Moresby".

Agents at all Papua New Guinea Ports.

RABAUL: 04.12 S. 152.10 E. (See Plan Book)

(See General Section on Papua New Guinea Ports)

PORT LIMIT: Seaward Boundary.

By a straight line due South from a point on the Easternmost extremity of Matupi Island for 4,375 m. to a position in Lat. 4° 16.8′ S., Long. 152° 11.8′ E., thence by a straight line due West to a point on the S.E. extremity of the land known as Vulcan.

PILOTAGE: Compulsory – 24 hours a day.

Pilot Boarding Ground: With Matupi Island light house bearing 360° (T) distant 1,800 m.

ETA at pilot boarding ground not less than 12 hours prior to arrival via Rabaul Radio (P2R). Confirm or amend ETA not more than 5 hours and not less than 4 hours prior to arrival (Rabaul Radio – (P2R)).

ANCHORAGE: There are no recommended anchorage areas for large ships, but anchorage in approx. 30 m. of water may be obtained in good holding ground in a position lower leading light bearing 015° (T) distant 1,110 m.
TUGS: 2×12 m. workboats (165 h.p.) available for hire from Private Operator.
VHF: Call sign "Rabaul Port Control" Listening watch during normal working hours and when vessel expected outside normal hours. Channels 16, 12, 8 and 6.
BERTHING: There are two overseas berths. Bay Road wharf is 152.4 m. long, height above M.L.W. 2.8 m., min. depth of water at L.A.T. 10.2 m.

Blanche Street Wharf is 121.9 m. long. Height of deck above M.L.W. 2.8 m. Minimum depth at L.A.T. 7.9 m.

Vessels may berth either port or starboard side to at either wharf at the discretion of the Port Authority.

Load/discharge is by ship's own gear (Except under special arrangement).
STEVEDORES: 72 hours notice preferred, but a min. of 24 hours required.

Working Hours: Day shift: 0800–1200, 1300–1600 hrs.
Evening Shift: 1600–1700, 1800–2400 hrs.
Limited work after midnight.
TANKERS: Discharge facilities are available for overseas vessels at the Blanche Street Wharf.
FUEL: Diesel fuel and distillate available by road tanker from Shell, Mobil and Caltex.
FRESH WATER: Available at a rate of 25 t.p.h., supply sometimes restricted. Prior arrangement to be made with the Port Authority.

Fresh water also available by private barge, capacity 150 tons for vessels at anchor.
REPAIRS: Only light deck repair facilities available.
SURVEYORS: Lloyds Agent, Burns Philp (N.G.) Ltd., P.O. Box 87, Rabaul.
AIRPORT: Rabaul airport is 4 km. from the port and is served daily by Air Nuigini.
POLICE/AMBULANCE/FIRE: Police: 922222. Ambulance: 922162. Fire: 921411.
DELAYS: Delays at Rabaul are unlikely.
DEVELOPMENT: The only development planned at Rabaul for the next few years are new coastal facilities.
GENERAL: Covered Storage: 9,640 sq.m. Open Storage: 18,600 sq. m.
AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Rabaul.

SAMARAI: 10.36 S. 150.39 E. (See Plan Book)

(See General Section on Papua New Guinea Ports)
PORT LIMITS: Seaward boundary.

From a point on the Northernmost point of Samarai Island due North for 800 m. thence due West for 1,300 m. thence due South for 1,000 m. thence due East for 1,000 m. to a point on the N.W. coast of Samarai Island.
PILOTAGE: Pilotage is not compulsory but a Pilot will attend from Port Moresby given 48 hours notice of the ship's intention to call at Samarai.

Pilot boarding ground: within 300 m. radius of a position with the North corner of Samarai main wharf bearing 180° (T) distant 1,850 m.

ETA to be sent not less than 12 hours prior to arrival via Port Moresby Radio (P2M) and to be confirmed not more than 5 hours and not less than 4 hours prior to arrival. No VHF facility.
ANCHORAGE: There are no recommended anchorage areas for large vessels in the vicinity of Samarai.
BERTHING: Overseas wharf is 93.2 m. long, height of deck above LWOST 2.7 m., minimum depth of water at LWOST 7.8 m. Due for demolition in 1978.

Vessels may berth either port or starboard side to at the discretion of the Port Authority.

Load/discharge is by ship's own gear.
STEVEDORES: 72 hours notice preferred, but a minimum of 24 hours required.
TANKERS: Discharge only at main wharf.
FUEL: Diesel available by pipe-line. Supplied by Shell.
FRESH WATER: Very limited quantities available at times, prior arrangements to be made with Port Authority.
AIRPORT: There is no airport at Samarai. The nearest airport is at Gurney, outside Alotau.
POLICE/AMBULANCE/FIRE: Police: Samarai 225. Ambulance (Hospital) Samarai 222. Fire: No service available.
DELAYS: Delays at Samarai are most unlikely.
DEVELOPMENTS: A new coastal facility is being designed for Samarai and after construction the port will be closed to overseas vessels.
GENERAL: Covered Storage: 390 sq.m. Open Storage: 140 sq.m.
AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Samarai.

VANIMO: 02.41 S. 141.18 W. (See Plan Book)

(See General Section on Papua New Guinea Ports).
PILOTAGE: Not available.
TUGS: One tug 150 b.h.p.
BERTHING: Position of wharf: 02° 41.09′ S, 141° 17.84′ E. Length, 18.7 m. (61.5 ft.); width 6.1 m. (20 ft.). Minimum depth alongside at L.A.T. 4.9 m. (16 ft.).
FRESH WATER: Not available to ships.
FUEL: Distillate available by road tanker.
AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Vanimo.

WEWAK: 03.34 S. 143.38 E. (See Plan Book)

(See General Section on Papua New Guinea Ports)
PORT LIMIT: Seaward Boundary.

From Wewak Point by a straight line due North for 2,900 m. thence by a straight line due East for 3,725 m. thence by a straight line due South for 4,780 m. to a point 800 m. due East of Cape Boram, thence to Cape Boram.
PILOTAGE: Pilotage is not compulsory but a Pilot will attend from Madang given 24 hours notice of the ship's intention to call at Wewak. A Pilot will shortly be stationed at Wewak.

Pilot Boarding Ground: With Cape Boram bearing 180° – 4,000 m.

ETA to be sent not less than 12 hours prior to arrival via Port Moresby Radio (P2M) or Rabaul Radio (P2R) and to be confirmed not more than 5 hours and not less than 4 hours prior to arrival.
ANCHORAGE: There are no recommended anchorage areas for large vessels in the vicinity of Wewak.
VHF: Call sign: "Wewak Port Control". Channels 16, 12, 8 and 6. Listening watch maintained during working hours and outside normal working hours when vessels expected.
BERTHING: Overseas wharf is 73.1 m. long, height of face above Chart Datum is 3.5 m., min. depth of face at Chart Datum is 6.7 m.

Vessels may berth either port or starboard side to at the discretion of the Port Authority.

Load/discharge is by ship's own gear.

Berthing may be delayed during the N.W. season December – March.
STEVEDORES: 72 hours notice preferred, but a minimum of 24 hours required.

Working Hours: Day shift: 0800–1200, 1300–1600. Evening shift: 1600–1900, 2000–2400. 2 hours extension to finish possible.
TANKERS: No discharge facility exists.
FUEL: Diesel available by road tanker, supplier Mobil.
FRESH WATER: Only available by road tankers.
AIRPORT: Wewak airport is 5 km. from the port and is served daily by Air Nuigini.
POLICE/AMBULANCE/FIRE: Police: 862222. Ambulance: 865188. Fire: 865055.
DELAYS: Delays at Wewak are unlikely but if they do occur are of short duration.
DEVELOPMENTS: The only planned development is to widen the pile causeways leading to the main wharf.
GENERAL: Covered Storage: 1,500 sq.m.
Open Storage: 2,320 sq.m.
AUTHORITY: Papua New Guinea Harbours Board, Port Moresby. Port Manager, Wewak.

Peru

ATICO: 16.14 S. 73.43 W.

Atico is an open roadstead and unprotected. The main activity is the loading of fishmeal.
PILOTAGE: Not available.
ANCHORAGE: Vessels anchor in the open roads.
TUGS: 1 available.
LIGHTERS: 3 available, 100 tons each.
CRANES: None.
STEVEDORES: See "Pimentel" for working hours and overtime rates.

There are 2 gangs available.
MEDICAL: Available at Mollendo.
FRESH WATER: Not available.
FUEL: Not available.
GENERAL: *Swell Period:* Heavy swell in the Winter months, June–September.
AGENTS: See "Callao".

CALLAO: 12.03 S. 77.10 W. (See Plan Book)

DOCUMENTS:

Airmail copies must be presented to Port Authorities 72 hours before arrival of vessel as otherwise vessel will be fined. No docking is allowed until Cargo Manifests and Cargo Plan are presented.

Vessel copies to be delivered on Clearing vessel inbound on arrival when Health, Customs and other Authorities board.

	By Air	*By Sea (With the Vessel)*
Cargo Manifests, including additionals. Must be faithful copies of Bills of Lading descriptions	5	*7
Same Manifests, but freighted	5	2
Cargo Manifests covering cargo shortshipped but manifested on previous vessels calling at Callao	5	*7
(If Master Stencils are airmailed, the required number of Manifests will be printed)		
Transit Cargo Manifests	–	3
Freighted copy of each Bill of Lading	–	4
List of Containers with their numbers	2	2
Content List, each Container, properly identified with marks, numbers and Bills of Lading numbers	2	2
Dangerous Cargo Lists showing complete description of goods, Flash Point, IMCO Classification, Type of Label, marks, numbers and Bills of Lading numbers	3	3
Transit Dangerous Cargo Lists	3	3
Mail Manifests	5	5
Passenger Lists	1	*10
Transit Passenger Lists	–	*10
Tally Books	–	16
Stowage Plan	3	–
Consolidated Stowage Plan, prepared or checked on board	–	3
Visaed Tonnage Certificate or General Declaration from First Port receiving cargo for Peru and every port of call thereafter	–	1
Health Clearance, last port of call	–	1
Vaccination List	–	*1
General Declaration	–	*7
Crew List	–	*10
Crew Personal Effects Declaration	–	*3
Store List	–	*4
Sealed Consular Documents addressed to Customers, in envelope	–	1

*Must be made out on LAFTA Forms.

PILOTAGE: Pilots must be requested by Agent and board ships outside of port at anchorage. Various pilot launches painted white, black and red.
ANCHORAGE: Very large area to the West of entrance buoys.
RESTRICTIONS: Vessels of up to 32 ft. draft may enter at any time. Vessels of more than 32 ft. draft must enter at high water. Pilots available 24 hours.
MAX. SIZE: Length and breadth practically unlimited, draft 32 ft. plus height of tide making allowance for keel clearance.
HEALTH: Cable Agent requesting free pratique. Agent must be notified in advance if any illness or disease suspected on board. Free Pratique is hardly ever given unless Health Officer and Captain of the Port and other Officers board.
RADIO: Radio Costera, OBC3, 460, 500, 8546, VHF 16 and 14 (Peruvian Navy 24 hours).

Arrival Advice: 24 hours Notice of Arrival should be sent to the Captain of the Port and the Agent.
TUGS: Port Authority Tugs join vessel once inside mole, 1 or 2 as required, using vessel's lines, later passed to pier. 4 tugs available 2 at 175 h.p. 1 at 500 h.p. and 1 at 800 h.p.
BERTHING: There are 9 piers with a total of 24 berths, 22 for large vessels, and 2 for coasters.

The various berths of the port can be subdivided into areas for their appropriate usage as follows:

	Quays	*Berths*
General cargo	1, 2, 3, 4, 5	1A, 1B, 2A, 2B, 3A, 3B, 4A, 5A, 4B.
Dry bulk cargo	11, 9	11A, 11B, 11C, 9A, 9B, 9C.
Liquid bulk cargo (Oil derivates)	7	7A, 7B.
Minerals	5	5B, 5C, 5D, 5F.
Logistic supplies and coastal vessels	9, 10	9D, 10A, 10B.

All piers except the petrol pier are connected to railway system for unloading and loading to railway wagons.

Within port limits anchorages can be used for discharge of livestock, scrap and occasionally for general cargo after permission obtained from the Port Authorities.

Berths 5B, 5C, 5D and 5E are equipped with conveyor belts for shipping granulated bulk ore.

Berths 9A, 9B and 9C have a conveyor belt for shipping fishmeal in pellets.

For discharge of grain, there are three pneumatic mobile suction towers and silos with a capacity up to 23,000 tons. The average rate of discharge of the pneumatic towers is 100/150 tons per hour for two towers and 300 for one tower.
STEVEDORES: No particular advice necessary but Agent must receive Stowage Plan beforehand to advise Port Authority of planned operation.

Working Hours: 1st shift 0700–1200 hrs. and 1300–1600 hrs. 2nd shift 1700–2400 hrs. Both are compulsory, except 2nd shift on Sundays and Holidays. 3rd shift 0100–0700 hrs., optional, except after Sundays and Holidays when not worked. There is an additional charge of 25% for the 3rd shift.

Lighters: In the port, a lighter service is provided by private concerns to enable vessels to discharge at moorings, and thus reduce the time they are at the quays.
CRANES: There are a number of cranes with lifting capacity from 4 to 50 tons. The Callao Naval Base has a floating crane with a lifting capacity of 80 tons, which can be called upon if necessary.
MEDICAL: Advance information as to sick crew members not required but helpful. Ample first class facilities in the Lima area. Smallpox vaccination cards required.
TANKERS: *Petroleum Pier: Pier No. 7:* Max. depth 35 ft., however, depth in approaches to berth is 33 ft. at HW and 31 ft. at LW, max. length about 200 m.

There are numerous loading and discharge pipe-lines of different diameter to handle oil derived products.

These lines can be used simultaneously at the berths A and B, but also depending on store facilities on shore or delivery into trucks.

Discharging pressure of the lines: 100 lb. per sq. in. for 12 to 22 in. lines. On the pipe-line of 6 inches it is possible to reach a pressure of 250 lb. per sq. in., for discharge of LPG.

Connections: There are connections from 4 to 10 in. for all kind of flanges.

Water: Supply of water is possible, 40 t.p.h.

Discharge of ballast or slops inside mole prohibited. Tankers loading Fishoil must arrive free of ballast.
DENSITY: Sea water.
FRESH WATER: All berths equipped with fresh water supply at an average rate of 30 t.p.h.
FUEL: The following are available from Petroleos del Peru, Bunker "C" 3,500 seconds, Petroperu No. 5 (intermediate 4) 400 seconds, Diesel 2 (marine diesel) 100 seconds.
FIRE PRECAUTIONS: Use of Port Authority Fire Equipment mandatory during discharge of petroleum products with charge for service. Safety equipment charge accessed to all vessels on tonnaged moved.
GANGWAY/DECK WATCHMEN: Recommendable.
CERTIFICATES: All may be required but normally only the deratting certificate is asked for. If Ratguards are not used on all lines, vessel liable to fines.
CUSTOMS ALLOWANCE: Any amount over normal consumption usually cause difficulties including searching.
CARGO GEAR: No additional requirements.
IDENTIFICATION CARDS: Supplied by Agent and stamped by Immigration. Authorisation required for all crew members.
CONSULS:

A.R.E.
Argentina
Austria
Belgium
Bolivia
Brazil
Canada
China
Colombia
Costa Rica
Denmark
Dominican Republic
Ecuador
El Salvador
Finland
France
Germany
Great Britain
Greece
Guatemala
Haiti
Holland
Honduras
India
Israel
Italy
Japan
Jordan
Lebanon
Mexico
Nicaragua
Norway
Panama
Paraguay
Poland
Portugal
Spain
Sweden
Switzerland
Uruguay
U.S.A.
U.S.S.R.
Venezuela
Yugoslavia

REPAIRS: Normal Deck and Engine repair facilities available through private companies in Lima and Callao.

DRY DOCKS: Major repairs can be undertaken by the Naval Industrial Department, including careening and repairs in dock.

(*a*) Dry dock – length 632 ft., width 82 ft., depth 21 ft.
(*b*) Floating dock 107 – length 408 ft., width 48 ft., depth 20 ft.
(*c*) Floating dock 106 – length 288 ft., width 46 ft., depth 14 ft.

SURVEYORS: Lloyd's Register of Shipping, ABS, R.I., and N.V.

REPATRIATION: All foreign crew members who do not have Peruvian Visas which only obtainable abroad, must be repatriated by quickest means (Air) by Agent, paying all detention expenses. Peruvian and foreign crew members available.

AIRPORT: Lima/Callao within city limits has regular direct international service to North and South America, Europe and Far East.

HOLIDAYS: Only 1st May when work is not available.

AUTHORITY: Port Captain, Terminal Maritimo de Callao.

AGENT: "La Hanseatica" S.A. General Agents, Ship Agents, Brokers, Enrique Canaval Moreyra 340, floor 9 and 10, Lima 27 (San Isidro), PO Box 3049, Lima 1. Tel. 406447. Cable "Hanseat". Telex 25279–20029–20464.

CHANCAY: 11.35 S. 77.16 W. (See Plan Book)

Chancay is an unprotected open roadstead about 31 miles North of Callao. The main activities are the loading of fishmeal and discharging of fertilisers.

PILOTAGE: Compulsory. The Port Captain currently acts in this capacity.

ANCHORAGE: There is a good anchorage, in 5 and 8 fathoms of water, on a sand and mud bottom, located in the outer area of the bay, which is 1 mile long by 0.5 miles wide.

RADIO: *Arrival Advice:* 24 hours Notice of Arrival should be sent to the Captain of the Port and the Agent.

TUGS: 2 Tugs of 56 h.p.

BERTHING: There is a pier for loading barges.

LIGHTERS: 12 lighters with a capacity of 40 tons each.

CRANES: 2×14 tons capacity.

STEVEDORES: The same system applies here as throughout the Republic, the tariff only altering according to the number of workers employed.

3 shifts and 2 more if necessary.

MEDICAL: Medical consultations possible.

FRESH WATER: Not available.

FUEL: Not available.

AUTHORITY: Port Captain.

AGENT: See "Callao".

CHIMBOTE: 09.05 S. 78.37 W. (See Plan Book)

Chimbote is a berth port with possibilities to load and discharge from and into lighters if berths are not available. Main activity: Loading of fishmeal and minerals; discharging of iron, steel, and general cargo.

DOCUMENTS:

For Entry

2 Entry Declarations (Form No.1).
1 Departure License of the last foreign port en route.
1 Maritime Health Declaration (Form No. 2).
2 Passenger Lists with entry baggage (Form No. 3).
1 Consular Roll of the last foreign port en route.
1 Consular Passenger List of the last foreign port.

Customs Administration

1 Original Cargo Manifest(s) with the Consular stamp. (Form No.4).

The envelope(s) from the Consul, enclosing copies of the Consular invoices, bill of lading and cargo manifest for the port with the Consular stamp.

1 Cargo Manifest (Form No.4).
1 Cargo Manifest of cargo, but with further destination for another national or foreign port (Form No. 4).
1 Cargo Manifest in transit.
1 Gross or Net Tonnage Certificate, with Consular visa.
1 Unaccompanied Baggage List (Form No. 5).

Customs

1 Entry Declaration (Form No. 1).
1 Cargo Manifest(s) for port without Consular visa (Form No. 4).
1 Manifest of Cargo for port, but with further destination for another national or foreign port, without Consular visa (Form No. 4).
2 Passenger Lists with entry baggage (Form No.3).
2 Not Accompany Baggage Lists (Form No. 5).
1 Crew Personal Effect List.
1 Store List, food and spirits.
1 Mail List.

Port Administration

1 Entry Declaration (Form No.1).
1 Passenger List with entry baggage (Form No. 3).
1 Not Accompany Baggage List (Form No. 5).
3 Cargo Manifests for the port, without the Consular visa (Form No.4).
3 Manifests of Cargo for port, but with further destination for another national or foreign port, without Consular visa (Form No. 4).
3 Sets of Bills of Lading.

Refer to "San Juan" for further information on Consular endorsement.

PILOTAGE: Compulsory. Official Pilot boards vessels at entrance to bay and leads ship to appropriate anchorage according to draft. Private Pilot to moor to the quays of the "Corporacion Peruana del Santa" and to "Sogesa". Vessels enter the inner roadstead, through Southern side of each channel. Depart through Northern side of channel.

ANCHORAGE: Good anchorages in bay according to draft. Anchorages are of mud and sand. Best place to anchor ship of medium draft is inner side of Paso del Norte, 6 fathoms deep, near port and safe. Another good anchorage for ship of medium draft is with Island bearing 170° and Rosas Blancas bearing 275°, 6 fathoms deep.

HEALTH: Health authorities board on arrival.

RADIO: Hablanaves Radio at Talara and Trujillo (Buenos Aires), Radio Costera at Callao.

Arrival Advice: 24 hours Notice of Arrival should be sent to the Captain of the Port and the Agent.

TUGS: 6 private, 3 of 80 h.p., 1 of 60 h.p. and 1 of 165 h.p. and 1 of 180 h.p. The Port Authority has two tugs, 1 of 400 h.p. and 1 of 200 h.p.

BERTHING: 3 piers available.

No. 1 Pier: Length 158 m., width 16 m., depth alongside 27 ft. – 28 ft.

No. 2 Pier: Used only for the loading and discharge of lighters (fishmeal). Length 54 m., width 18.40 m. Average depth 4.5 m.

No. 3 Pier: Operated by Siderperu. Length 265 m., width 25 m., depth alongside 28 ft. – 31 ft. There are two bridges for discharging coke and minerals by clamp. (Total capacity 300 t.p.h.)

LIGHTERS: 12 for dry cargo: 2 at 150 tons and 10 at 50 tons. 10 tanklighters with a total capacity of 1,300 tons.

CRANES: 5 cranes: 3×17 tons, 1×13.8 tons and 1×6.25 tons capacity.

STEVEDORES: See "Callao".

MEDICAL: Agent arranges emergency attention. Hospital and private clinic available.

TANKERS: Three zones for load/discharge of fish-oil and lubricants. Ship loads fish-oil by barges being anchored. Discharge of fuel when ship anchored to buoys by means of submarine lines.

FRESH WATER: Two barges to supply fresh water to ships, one of 40 metric tons and other one of 25 metric tons. Fresh water available at Pier No. 1.

FUEL: Available by tanker lorries if special arrangements are made.

DEVELOPMENTS New quays to be built.

GANGWAY/DECK WATCHMEN: The services of watchmen are necessary.

OPENING/CLOSING HATCHES: This job is carried out by stevedores.

CUSTOMS ALLOWANCE: Tobacco: 10 packets per person per week. Wine and/or Spirits: With approval of Customs, within normal consumption.

CARGO GEAR: Vessel's derricks used, the quay has fixed crane for 50 metric tons and three mobile cranes for 15 tons.

IDENTIFICATION CARDS: Needed for both crew and passengers.

CONSULS: Only the Vice-Consul of Spain and Panama.

REPAIRS: Only minor repairs are possible.

REPATRIATION: Facilities for crew changes and arranging any necessary repatriation.

AIRPORT: Port has landing place for planes, but it is only for national use, not for international flights.

TIME: GMT minus 5 hours, all year round.

HOLIDAYS: Cargo work can be arranged on holidays with an extra 100% charge over basic pay. The only exception is 1st of May, on which cargo work cannot be arranged.

TELEPHONES: No arrangements for placing telephones on board. They are about 50 m. from ship.

SHORE LEAVE: Crew members allowed ashore.

REGULATIONS: Not allowed to use wireless when ship is in port. Nor allowed to put any boat on the water without permission of Capitania del Puerto. Not allowed to throw any waste or litter into bay. Not allowed to make unnecessary sound signals.

GENERAL: *Swell Period:* February/March and June/October.

AUTHORITY: Capitan de Puerto – Direccion Capitania de Puerto Chimbote.

AGENT: See "Callao".

CONCHAN: 12.10 S. 77.00 W.

Tanker Buoy berth about 30 miles South of Callao.

DOCUMENTS: Tankers calling at Conchan must first call at Callao anchorage to be received and cleared by Authorities. Not necessary to call at Callao after discharge as clearance is simultaneous with reception.

PILOTAGE: Private Pilot boards vessel at Callao anchorage and either remains on board or returns to take vessel out, as required by Master.

BERTHING: Vessels moor to buoys. One submarine line of 16 in. reducing to 12 in. at vessel's connection, running 1,000 m. from shore opposite Conchan refinery.

LAUNCH: Launch service between Conchan and Callao or Conchan and Fish Pier at Barranco, southern suburb of Lima during vessel's stay in port.

GENERAL: Two Customs police and two refinery employees board at Callao and remain on vessel during discharge.

AGENT: See "Callao".

ETEN: 06.56 S. 79.52 W.

Eten is about 348 miles North of Callao. The port is an unprotected open road. All cargo operations are undertaken by lighters. The main activities are the export of sugar and import of fertiliser and general cargo.

PILOTAGE: Not available.

ANCHORAGE: Vessel anchor about 0.5 mile off the Mole Head in 7–8 fathoms, near the anchorage place of the lighters mooring out at sea, if draft requires, as loading progresses.

RADIO: *Arrival Notice:* 24 hours Notice of Arrival should be sent to the Captain of the Port and the Agent.

TUGS: 4 tugs of 80 h.p. each.

LIGHTERS: 13 lighters with a total capacity of 635 tons.

BERTHING: There is a pier for handling barges.

CRANES: 3 steam cranes, 2 × 2 tons and 1 × 15 tons. 1 diesel crane of 3 tons capacity.

STEVEDORES: See "Pimentel".

FRESH WATER: Not available.

MEDICAL: There is a hospital at Chiclayo 15 km. from the port.

CONSULS: Vice-consul of the Netherlands.

GENERAL: *Swell periods;* Eten being an unprotected open road port it frequently occurs that the port has to be closed due to heavy swell. The swell comes up suddenly and is not subject to any specific period, but it occurs more frequently during June/September and the Easter week.

AGENT: See "Callao".

GENERAL SAN MARTIN: 13.48 S. 76.17 W. (See Plan Book)

PISCO: 13.43 S. 76.14 W.

PILOTAGE: Compulsory.

RADIO: *Arrival Advice:* 24 hours Notice of Arrival should be sent to the Captain of the Port and the Agent.

TUGS: 16 tugs available. 10–800 h.p.

BERTHING: 1 quay with 4 berths each 175 m. in length. Max. draft 32 ft. (25,000 tons). Cargo is loaded by portable conveyor belts.

LIGHTERS: 28 wooden lighters for general cargo, total capacity 1,800 tons. 5 steel lighters (not immediately available), total capacity 600 tons. 3 lighters for liquid cargoes, total capacity 500 tons.

CRANES: 1×13.61 tons, 1×22.68 tons and 1×6.25 tons capacity.

STEVEDORES: *Working Hours:* 0800–1200 hrs., 1300–1700 hrs., 1800–2400 hrs., 0100–0700 hrs.

109 stevedores available.

MEDICAL: There is a hospital available.

TANKERS: *Submarine Pipe-line:* The pipe-line belongs to Petroperu. Position 13° 36′ 20″ S., 76° 15′ 54″ W. Length of pipe-line 700 m., diameter 8 in. Pilotage is compulsory. Depth of water 7.5 fathoms. Pumping rate 70-75 t.p.h.

FRESH WATER: Available.

FUEL: Not available.

AGENT: See "Callao".

HUACHO: 11.07 S. 77.37 W.

Huacho is an unprotected open roadstead about 69 miles North of Callao. The main activity is the loading of fishmeal and minerals and discharging of fertilisers.

PILOTAGE: Not available.

ANCHORAGE: Vessels anchor in open roads.

RADIO: *Arrival Advice:* 24 hours Notice of Arrival should be sent to the Captain of the Port and the Agent.

TUGS: 4 tugs available, 1 each at 50, 60, 72 and 180 h.p.

LIGHTERS: 29 lighters, total capacity 1,450 tons.

BERTHING: There is a pier for mooring barges, length 223 m.

CRANES: 3×13.60 tons each.

STEVEDORES: See "Pimentel" for working hours and overtime rates.

4 gangs of 9 men each available.

MEDICAL: Assistance available.

FRESH WATER: Not available.

FUEL: Not available.

GENERAL: *Swell Period:* Frequently during the Winter months (May–September).

AGENT: See "Callao".

HUARMEY: 10.06 S. 78.10 W.

Huarmey is an unprotected open roadstead for the loading of fishmeal.

PILOTAGE: Not available.

ANCHORAGE: Vessels anchor in the open roads.

RADIO: *Arrival Notice:* 24 hours Notice of Arrival should be sent to the Captain of the Port and Agent.

TUGS: 4 tugs available, 2 × 145 h.p. and 1 each at 120 h.p. and 165 h.p.

LIGHTERS: 18 at 50 tons each.

CRANES: 1 of 2 tons capacity and 1 mobile crane.

STEVEDORES: See "Pimentel" for working hours and overtime rates.

3 gangs of 9 men each available.

MEDICAL: Assistance available.

FRESH WATER: Not available.

FUEL: Not available.

GENERAL: *Swell Period:* June to August.

AGENT: See "Callao".

ILO: 17.39 S. 71.21 W. (See Plan Book)

DOCUMENTS:

6 Entry Declarations.
4 Passenger Lists (disembarking).
4 Passenger Lists (in transit).
3 Personal Effects Lists.
3 Stores Lists.
1 Maritime Health Declaration.
3 Sets Cargo Manifest.
10 Cargo Manifest.

Refer to "San Nicolas" for further information on Consular endorsement.

PILOTAGE: No pilot station; there is a Pilot in the Capitania del Puerto, who should be notified in advance by Agents. Two hours notice of ETA required. Pilot boards at anchorage 800 m. from extension of the SPCC quay.

ANCHORAGES: 400 m. to the North of the end of the SPCC quay, in 15 fathoms depth.

MAX. SIZE: See "Berthing".

HEALTH: Pratique given by Captain of the Port. In cases of suspected illness a doctor should be requested in advance. When the ship arrives from another Peruvian port free pratique is automatic.

RADIO: Cables connect with National Communications network. ETA sent to Port Authority and to Agencies.

TUGS: 1×690 h.p. tug available.

BERTHING: Berthing anytime. There are two piers, one belonging to Southern Peru Copper Corp. and one to ENAPU.

SPCC: Two vessels are able to berth alongside. Length of pier 520 ft., width 60 ft. Depth alongside varies from 35 ft. to 50 ft.

ENAPU: Length of pier 300 m., width 27 m. Depth alongside varies from 18 ft. to 60 ft. Vessels able to berth both sides. South side depth 18 ft. at inner end, 54 ft. at outer end. North side depth 24 ft. inner end, 60 ft. outer end.

STEVEDORES: Stevedores come under the Capitania del Puerto and are ordered by Agents. *Loading Rates:* Copper sheets loaded 65 metric t.p.h. Fish-flour loaded at 100 metric t.p.h. in an 8-hour shift.

Working Hours: 0700-1200, 1300-1600, 1700-2400, 0100-0700 hrs., ten gangs available of nine men each.

MEDICAL: Medical assistance ordered by Agents. Hospital "El Centro de la Salud", and the Saint Geronimo Hospital.

TANKERS: *At Ilo:* Discharge line diameter 10 in., 2 lines, connection to the ship's manifold 8 in., connection and flexible line, working pressure 100 lb. A buoy mooring berth.

Depth of water 40 ft. pumping rate 80-90 t.p.h. Vessels of Petroperu have preference.

Punta Tablones: Discharge line diameter 12 in., connection to the ship manifold 8 in. Flexible connection line, working pressure 100 lb. or 400 barrels per hour. A buoy mooring berth.

Max. length 750 ft. Depth of water 40 ft.

DENSITY: Salt water.

FRESH WATER: Available.

FUEL: None available.

DEVELOPMENTS: Terminal quay of 900 ft. long is now being built.

GANGWAY/DECK WATCHMEN: Watchmen provided by Agents when necessary.

OPENING/CLOSING HATCHES: Strictly forbidden for the crew; must be done by stevedores.

CERTIFICATES: When the ship comes from foreign port it is compulsory to produce Certificate of Gross Tonnage.

CUSTOMS ALLOWANCE: Tobacco: 10 packets per person. Wine and/or Spirits: Sufficient for meal times. Normal crew consumption only.

IDENTIFICATION CARDS: Agents arrange for cards to be signed by Port Authority for each crew member.

CONSULS: None.

REPAIRS: Some minor repairs.

REPATRIATION: There are facilities for effecting crew changes and arranging any necessary repatriation. Those who are going to be repatriated must have a permit from the Port Authority to be allowed ashore.

AIRPORT: Ilo Airport, 8 kms. Scheduled flights twice a week on Tuesdays and Saturdays and regular airport in Tacna at 1.5 hours by taxi, scheduled flights twice daily to Lima.

TIME: GMT minus 5 hours. No alterations during the year.

HOLIDAYS: 1st January (New Year); Maundy Thursday and Good Friday (change every year); 1st May (Labour Day); 29th June (Saint Peter and Saint Paul); 28th and 29th July (Motherland Days); 30th August (Saint Rosa of Lima); 1st November (All Saint Day); 8th December (Our Lady); 25th December (Christmas).

Holidays which are not in the Calendar but are considered Holidays with reference to payments to the workers: 6th January (King's Day); 19th March (Saint Joseph); Corpus Christi (it varies every year); The evening of the 24th June (India man day); 30th July (Motherland Day); 15th August (Feast of the Assumption); 24th September (Las Mercedes); 12th October (Race Day); 27th November (Tarapaca Battle); 9th December (Ayacucho Battle).

POLICE/AMBULANCE/FIRE: Southern Copper Corporation operate fire service. Police, Tel. No. 3; Ambulance, tel. No. 3.

TELEPHONES: No arrangements for placing telephones on board.

SHORE LEAVE: Crew members allowed ashore and identify themselves with cards signed by Capitania del Puerto given through ship's Agents.

GENERAL: Tank cleaning and well cleaning must be done 5 miles leeward of port. Not allowed to unload explosive cargo.

DELAYS: Only delays when quay is occupied by two ships. In the load/unload operations the port can attend to 4 ships simultaneously and 4 more when new quay (that is now being built) is finished.

AUTHORITY: Capitan del Puerto, who is a Navy Officer.

AGENT: See "Callao".

LA PAMPILLA: 11.55 S. 77.09 W.

Tanker Buoy Berth about 30 miles North of Callao.

DOCUMENTS, ETC.: As for Callao.

Tankers calling at La Pampilla must first call Callao anchorage to be received and cleared by Authorities. Not necessary to call Callao after discharge as clearance simultaneous with reception.

PILOTAGE: Pilot boards vessel at Callao anchorage and either remains on board or returns by launch to take vessel out, as required by Master.

BERTHING: Vessels moor to buoys. 1 submarine line of 18 in. reduced to 10 in. at vessel's connection running 1,500 m. from shore opposite La Pampilla refinery. Max. size 200,000 d.w.t. or 250,000 d.w.t. with part load.

LAUNCH: Launch service between La Pampilla and Callao during vessel's stay in berth.

GENERAL: 2 Customs police and 2 refinery employees board at Callao and remain in vessel during discharge.

AGENT: See "Callao".

MATARANI: 17.00 S. 72.07 W. (See Plan Book)

Matarani is a berth port. Main activity: loading of minerals, wool, coffee, skins, tin-ingots, discharging general cargo. Matarani is an important transhipment port for cargo to and from Bolivia.

PILOTAGE: Compulsory.

RADIO: *Arrival Advice:* 24 hours Notice of Arrival should be sent to the Captain of the Port and the Agent through Radio Station in Naval Station, frequencies as per Calloa.

TUGS: 1 at 780 h.p., 1 at 690 h.p. and 1 at 800 h.p.

BERTHING: 1 quay with 4 berths. Length 540 m., width 20.15 m. Vessels of 570 ft. length can berth. Depth alongside 30 ft.

Berth 1A, 1B and 1C each 150 m. length. Berth 1D presently length 90.50 m., but being lengthened to 132.9 m. length.

CRANES: 5 at 10 tons, 4 at 6.25 tons and 1 at 20 tons lifting capacity.

MEDICAL: A hospital is available.

STEVEDORES: *Working Hours:* 0800–1200, 1300–1700, 1700–2400, 0000–0600 hrs.

9 gangs available of 15 men each.

FRESH WATER: Available.

FUEL: Not available.

GENERAL: *Swell Period:* From June to August.

AGENT: See "Callao".

PACASMAYO: 07.24 S. 79.35 W.

DOCUMENTS:

3 copies Voyage Log Extract.
2 originals and 5 copies of Entry/Exit Declaration, endorsed by Consul.
8 copies of Passenger Lists for the Port.
8 copies of Transit Passenger List.
4 copies of Store List.
4 copies of Personal Belongings Manifest.
13 copies of Cargo Manifest.
1 Maritime Health Declaration.
2 Crew Lists.
1 Vaccination List.
When this is the first Peruvian port, Gross Tonnage Certificates.
When having cargo for the port, Statement of Cargo, endorsed by Consul.
When Pacasmayo is the first or last port called, Lists or Manifests of cargo in transit (2 copies each).

Refer to "San Juan" for further information on Consular endorsement.

PILOTAGE: The port has no Pilots because it is an open bay. Vessels have free pratique after boarding by port officials.

ANCHORAGE: To the South of an East-West line from the quay as there are obstacles to the North.

APPROACHES: Reference points are the lighthouse of Cruz Punta Pacasmayo with a range of 12 miles, and during the day the cylindrical tower of cement factory with a height of 50 m. situated in the S.E. of the bay. On the head of the quay there is also a small iron tower of 9 m. height with a permanent red light of 2 miles visibility. The quay is very old and only flat boats can moor.

MAX. SIZE: Wide anchorage without problems concerning length or breadth. Recommended draft 4 fathoms, but it is possible to find 6, 8 or 10 fathoms towards the West. Current from South to North at an average of 6 knots.

HEALTH: Sanitary control is carried out by the health doctor who comes on board with port officials. Normally, captains notify any suspected illness or any other information by telegraph.

TUGS: They only operate to bring or take out flat bottomed barges once the vessel is moored.

BERTHING: Vessels anchor in open bay. There is an Iron Quay for the use of barges, length 533 m., width 10 m., depth at west end 3 m.

LIGHTERS: 9 lighters with a total capacity of 400 tons.

CRANES: 1×1 tons, 2×3 tons.

STEVEDORES: Agents order the number of gangs required. These gangs work at a tariff hour/ton and the amount is controlled by the Port Captain. The number of gangs (9 men each) depends on loading/discharging speed required and on the number of holds and winches available, For overtime rates see "Pimentel".

MEDICAL: Can be provided by Centro Preventivo del Area de Salud or by Hospital Regional de Chepen, 35 km. from port (150 beds).

DENSITY: Salt water.

FRESH WATER: Not available.

FUEL: Not available.

DEVELOPMENTS: When the mines of Micchiquillay (copper) start working, the embarking capacity of the port has to be 100,000 tons per month, consequently it is planned to build a quay for minerals or otherwise a floating island 6 miles from the port for embarking in gross raw materials by pipe-lines.

OPENING/CLOSING HATCHES: These operations are carried out by the stevedores.

SHIP CERTIFICATES: Deratisation or Fumigation Certificate; Vaccination Certificate for Crew and Passengers; Tonnage Certificate when coming from abroad.

CUSTOMS ALLOWANCES: Only tobacco, wines, spirits required for normal consumption, which must be included in vessel's stores list.

CARGO GEAR: Ships gear used.

IDENTIFICATION CARDS: Not required unless leaving the vessel.

CONSULS: There are no Consuls in the port.

REPAIRS: There is a small workshop in the port for minor repairs such as soldering, etc. There is no foundry.

DRY DOCKS: Nearest at Callao.

REPATRIATION: Members of crew of passengers can be repatriated subject to Port Authorities permission and passport control.

AIRPORT: There is a small emergency airport 2 km. from the port where planes can land.

TIME: GMT minus 5 hours. During the 3 months of Summer clocks advance 1 hour.

HOLIDAYS: Holidays have been restricted. The national official holidays are: 27th and 28th July (National Independence Days); 1st January (New Year); 25th December (Religious Fete); Maundy Thursday and Good Friday; variable days and 1st May (Workers' Day).
POLICE/AMBULANCE/FIRE: Police 2126; Ambulance 2225; Fire 2081.
TELEPHONES: It is not possible to instal telephones on board. Communication by walkie-talkie radio.
GENERAL: Fresh and dry provisions can be supplied, such as meat, poultry, vegetables and fruits.
SERVICES: There is no tank-cleaning equipment and the discharge of tank washing and any other kind of garbage is forbidden, for the bay is a bathing area.
SHORE LEAVE: Allowed.
DELAYS: The vessel is anchored on arrival. Delays can occur due to heavy sea or rain in case of cement loading.
AUTHORITY: Captain of the Port.
AGENT: See "Callao".

PAITA: 05.05 S. 81.07 W. (See Plan Book)

DOCUMENTS:
- 5 copies Peruvian "Declaracion de Entrada".
- 13 Crew Lists.
- 5 Cargo Manifests, from each port where cargo loaded, or negative.
- 5 copies of each Bill of Lading.
- 3 Personal Effects Lists.
- 13 Stores Lists.
- 1 Tonnage Certificate from first and last port.
- 1 International Maritime Health Certificate.
- 13 Passenger Lists, disembarking, or negative.
- 13 Passenger Lists, in transit, or negative.
- 1 Clearance from last port.
- 1 Sealed envelope from Peruvian Consulate addressed to Customs.

(Documents should be visaed by Peruvian Consulate.)
PILOTAGE: Compulsory. There are two Pilots, on 24 hour service. Arranged by Agent. The boat is an old disembarking launch, hoisting blue flag with a white "P" Pilot will board after free pratique has been granted by Port Captain and Health authorities.
ANCHORAGE: Recommended 5° 04′ S. 81° 07′ W.
RESTRICTIONS: Draft restricted to 31 ft. at low water.
MAX. SIZE: Length and breadth practically unlimited.
HEALTH: Agent will notify Health Authorities about the vessel's arrival.
RADIO: Recommended Balboa Radio.
Arrival Notice: 24 hours Notice of Arrival should be sent to the Captain of the Port and Agent.
TUGS: 1 tug of 850 h.p., 1 tug 360 h.p. and one launch 60 h.p. used by the Pilot.
BERTHING: One finger pier, length 475 m. width 36 ft. Four berths available, depths are as follows:

No. 1A (North-west Berth)	32.0 ft.
1B (North-east Berth)	32.0 ft.
1C (South-west Berth)	23.8 ft.
1D (South-east Berth)	22.9 ft.

A safety margin of 3 ft. should be observed. It is advisable to request (from Pilot) berths "B" or "D", if empty, due to the prevailing winds. The berths have good fenders.
Cranes with capacity of 25,000, 15,000 and 10,000 lbs. available.
STEVEDORES: Arranged by Agent at 24 hours notice.
Working Hours: 0800-1200, 1300-1700, 1700-2400 and 0000-0700 hrs.
Night Work: Possible, as long as it is ordered in plenty of time.
10 gangs of 9 men each available per shift.
MEDICAL: There is a local hospital with all facilities.
TANKERS: There are 4 mooring buoys 0.25 m. East of the finger pier. Facility is the property of Petro-Peru. Oil loaded and discharged by submarine pipe-line.
DENSITY: 1030.
FRESH WATER: There are 3 drinking water hydrants on each side of the pier. Vessels require pumps to take on water from the storage tank (capacity 14 tons).
FUEL: Not available.
FIRE PRECAUTIONS: Port Authority fire equipment stationed at the end of the pier.
STORES: Fresh provisions available.
GANGWAY/DECK WATCHMEN: Available on request.
CERTIFICATES: Not requested.
CUSTOMS ALLOWANCE: Two cartons and one bottle per person.
CARGO GEAR: No additional requirements.
IDENTIFICATION CARDS: Not required.
CONSULS: Ecuador.
REPAIRS: No facilities.
REPATRIATION: Allowed on request to the Port Captain.
GENERAL: Painting and chipping ship's side restricted. Very strict concerning rat-guards, throwing of garbage, etc.
AIRPORT: Piura, airport 55 km. with domestic flights to Lima International Airport.
HOLIDAYS: 1st May only.
AUTHORITY: Captain del Puerto.
AGENT: See "Callao".

PIMENTEL: 06.50 S. 79.56 W. (See Plan Book)

Pimentel is an unprotected open road port, loading/discharging only from/into lighters. Clearance is possible day and night, including Sunday and holidays, but of course with overtime additionals. Main activity: Sugar export, import of fertilisers and general cargo.
PILOTAGE: Not available.
ANCHORAGE: Vessels usually anchor about 1.5 miles off the Pier Head in 7-8 fathoms, near to the anchorage place of lighters mooring out at sea if draft requires, as loading progresses.
RADIO: *Arrival Notice:* 24 hours Notice of Arrival should be sent to the Captain of the Port and the Agent.
TUGS: 2 at 82 h.p., 2 at 120 h.p. and 2 at 134 h.p.
LIGHTERS: 15 lighters with a total capacity of 1,170 tons.
CRANES: On the mole there are 3 diesel cranes each 3 ton capacity, 3 steam cranes with 4, 6 and 15 ton capacity. Max. dimensions of Cargo 27 ft. (length)×15 ft. (wide)×21 ft. (height).
STEVEDORES: *Working Hours:* 0700–1100 and 1300–1700 hrs. Overtime (plus 100%) 1100–1300 and 1700–2400 hrs. Overtime (plus 200%) 0000–0700 hrs.
On Sundays and holidays an additional 100% to the above-mentioned tariffs.
MEDICAL: There is a hospital at Chiclayo 15 km. from the port.
TANKERS: *Submarine Pipe-line:* Diameter 8 in. max. draft 18 ft. 1 pipe-line for clean products and 1 for dirty products. Length of pipe-line 1,770 m.
FRESH WATER: Not available.
FUEL: Not available.
CONSULS: Vice-consul of the Netherlands.
SURVEYOR: Mr. Manuel S. Reyes H., sub-agent of Lloyd's of London.
GENERAL: *Swell Periods:* Pimentel being an unprotected open road port it frequently occurs that the port has to be closed due to heavy swell. The swell comes up suddenly and is not subject to any specific period, but it occurs more frequently during June-September and the Easter week.
AGENT: See "Callao"

PUERTO CHICAMA: 07.42 S. 79.26 W.

Puerto Chicama is about 295 miles North of Callao. Fishmeal is loaded from lighters in an open roadstead.
PILOTAGE: Not available.
ANCHORAGE: Vessels anchor about one mile from the Mole.
RADIO: *Arrival Advice:* Advise general Agents in Lima who will telephone Port Agents.
TUGS: 3 tugs available, 1 of 65 tons and 2 of 80 tons each.
BERTHING: 1 Pier, length 324 m.
LIGHTERS: 20 lighters with a total capacity of 1,000 tons.
CRANES: 4 cranes, 2 of 2 tons, 1 of 4 tons and 1 of 6 tons.
STEVEDORES: Working hours are from 0700-2400 hrs. These hours may be exceeded to complete loading. Five gangs of 9 men are available.
FRESH WATER: Not available.
FUEL: Not available.
GENERAL: *Swell Period:* During the months of June, July and August.
AGENT: See "Callao".

SALAVERRY: 08.13 S. 78.59 W. (See Plan Book)

DOCUMENTS: See "Callao".
PILOTAGE: Compulsory.
RESTRICTIONS: Harbour entrance is sand and liable to silting. Advisable to check draft requirements in advance, as depths are subject to latest dredging. Designed depths: Entrance channel 11.0 m. Basin 10.0 m. Berths 11.0 m.
MAX. SIZE: Approx. 25,000 d.w.t. with up to 29 ft. draft. Draft varies greatly and quickly due to heavy constant sanding, although dredging is practically continuous.
HEALTH: Cable Agent requesting free pratique. Agent must be notified in advance if disease suspected on board.
RADIO: *Arrival Advice:* 24 hours Notice of Arrival should be sent to the Captain of the Port and the Agent.
TUGS: 4 tugs available, 1 each at 690 h.p., 190 h.p., 85 h.p. and 40 h.p.
BERTHING: *No. 1 Pier:* Length 225 m. Vessels able to berth both sides. Max. draft 28 ft. There are pipes installed for the discharge of liquids and loading of molasses and alcohol.
No. 2 Pier: Length 230 m. Vessels able to berth both sides. Max. draft 28 ft. This pier is specially for the loading of sugar in bulk, 2 loading bridges available, loading rate 300 metric t.p.h. each.
STEVEDORES: *Working hours:* 0700–2300. Sugar and molasses in bulk loaded 24 hours a day. 10 gangs available of 9 men each.
CRANES: 1×22.68 tons, 1×13 tons, 2×6.25 tons and 1×4.5 tons.
MEDICAL: At Trujillo, 15 km. from the port.
TANKERS: *Submarine Pipe-line:* Length 700 m., diameter of 10 in., depth 26 ft.
FRESH WATER: Available. Capacity of shore tank 800 tons.
FUEL: Not available.
REPAIRS: Workshops available.

GANGWAY/DECK WATCHMEN: Recommended.
CUSTOMS ALLOWANCE: Any amount held over normal consumption may result in Customs search being imposed.
IDENTIFICATION CARDS: Supplied by Agent and stamped by Immigration. Required for all crew members.
HOLIDAYS: Only 1st May when work is not available.
CONSULS: Nearest at Callao/Lima.
GENERAL: Due to constant swell and undertow which, during Winter months, May/September, may even close port, it is recommended vessel moor with greatest possible number of synthetic lines which must be constantly adjusted, otherwise usual line breakage will increase.

AGENT: See "Callao".

SAN NICOLAS: 15.14 S. 75.14 W. (See Plan Book)

DOCUMENTS:

Clearance	1
General Declaration (Form ALALC/OEA 1)	5 for arrival 5 for departure
Cargo Manifest. Only when authorities require it. (Form ALALC/OEA 2)	4 for arrival
Crew List (Form ALALC/OEA 3)	5 for arrival 5 for departure
Store List/Bazaar List (Form ALALC/OEA 5)	5 for arrival
Personal Effects Declaration	3 for arrival
Maritime Declaration of Health	2 for arrival
*Passenger List (Form ALALC/OEA 4)	6

*This document is not to be presented when vessel is not carrying passengers or cargo.

No Peruvian Consul Visa required when the vessel is in ballast.
The following documents should be available for inspection:
Ship's Papers.
Valid Fumigation or Exemption Certificate.
Crew's Identity Documents.
International Vaccination Certificates of all persons aboard.
List with following data: date and port of issue of ship's register, date and port of issue of Health Certificate, date of vessel's building and yard, list of ports of call with dates during previous 4 months.

PILOTAGE: Pilotage is compulsory for berthing. No vessel may proceed to pier until permission to berth has been granted. No vessel is permitted to berth alongside Hierro Peru Enterprise pier without an authorised Docking Pilot on board. While loading, during periods of heavy swells and surge a Hierro Peru Pilot will be on board permanently. Masters are requested to make arrangements and facilities available.

Upon arrival in port, vessels must anchor not less than 0.75 miles from the dolphin and wait for reception. Official time of arrival is the time of anchoring. The starboard accommodation ladder must be rigged for Port Officials and Hierro Peru representatives. Ships approaching San Nicolas must fly their national, Peruvian, call letters and quarantine flags. Vessels proceeding to San Nicolas to load iron ore will radio Hierro Peru, Lima, Peru, cable address Hierro Peru, Telex No. 200005 PE HIERROPE, their ETA 5 days – 72/48 hours and again at 24 hours prior to arrival; when vessels have direct contact with station "OAS", a pre-stowage hatch list in long tons must be radioed to Agent, giving tonnage per hatch and loading sequence. The coast radio station "OAS" located in San Juan Bay should be contacted as soon as vessel is within range. Berthing instructions and other messages from Agent at San Nicolas will be transmitted via this station. Radio contact must be made 48 hours prior to arrival, specially on week-ends and holidays.

BREAKWATER: A 2,410 ft. long breakwater has been built in order to reduce the effects of the swell alongside the pier. The breakwater is at the West side of the pier 875 yards of distance on the South end, and does not run parallel to the pier, but at N. 36° 35′ 28″ E. angle. The North end of the breakwater is 1,430 ft. from the North end of the dolphin, but the perpendicular distance from the pier to the closest point of the breakwater is only 1,090 ft.

At the North end of the breakwater there is a lighthouse with the following characteristics: 1 green flash light, visibility 4 miles.

BUOYS: At the East side of the pier 1 small buoy with a white flash every 4 seconds is located at half a mile True bearing 045° from head of Hierro Peru pier marking 60 ft. line depth.

ANCHORAGE: The anchorage recommended for vessels waiting for berth is in inner portion of the bay, East of meridian through San Nicolas Point in depths of 15 to 20 fathoms. When anchoring, it is essential to leave sufficient sea room, about 0.75 miles for ships to manoeuvre in and about the berth.

Wreck of M/S *Templar* lies in position: Lat. 15° 13′ 27″ S., Long. 75° 15′ 01″ W. The obstruction lies in approximately 150 ft. of water. Clearance above the obstruction is 60 ft. Do not anchor in the vicinity of the wreck.

RADIO: Coast Radio Station "OAS" is located in port of San Juan and serves both San Juan and San Nicolas. This station listens on 500 kc/s. 1200/1400 GMT, 4345 kHz 0130–0200 GMT, 6,510 kHz 0045–0100 GMT, 8,680 kHz 0000/0045 – 0100/0115 – 1200/1230 – 1600/1630 – 2000/2100 GMT, 16,968 kHz 0115/0130 – 1330/1400 – 1630/1655. It handles traffic on 410, 425, 444, 448, 454, 468, and 480 kc/s. Antenna output is 300 w.

There is a transmitter with the following frequencies schedule:
4,365 kHz – GMT 0045; 0100; 1000; 0200.
8,680 kHz – GMT 0000/0045; 1200/1230; 1600/1630; 2000/2100
16,978 kHz – GMT 1330/1400; 1630/1700; 2100/2200 listening on 4, 8 and 16 mHz.

TUGS: 2 small tugs available at 150 h.p.
BERTHING: *Pier and Mooring Facilities:* The pier is located at the South side of the bay and is built on a North-South direction. It is constructed of steel pipe-lines with deck 1,000 ft. long and 50 ft. wide. The deck is 11 ft. 3 in. above mean low water.

At the pier head, a mooring dolphin has been constructed to make fast the stern lines of any vessel bigger than 900 ft. overall length, the diameter 50 ft. Distance from Northern end of pier to Northern end of dolphin 198 ft.

There is a wooden retractile fender around the dolphin of 7.5 ft. wide. There are 3 big bollards, 2 pelican hooks and an electric winch to make fast the stern lines. There is also a connecting bridge from the pier to the dolphin, which is 148 ft. long.

There is a fendering system on both sides of the pier consisting of wood pilings and a continuous rail of laminated lumber and rubber cylinders which keep vessels 5 ft. from the concrete pier. On the West side of the pier (ore-loading side) there are 28 mooring cleats, 12 bollards and 3 double mooring bitts. At the centre of the pier-head there is 1 bollard. On the East side of the pier there are 23 cleats, 2 bollards and 1 double mooring bitt. The loading berth on the West side of the pier has been deepened.

The original depth in the berth was 42 ft. at the shore end and 59 ft. at the seaward end. The new depth is 62 ft. all alongside the pier and up to 300 ft. Westward from the pier fender, except in the place known as anchor pocket which is located between the pier-head and the dolphin. The anchor pocket is 70 ft. deep, 250 ft. long and 300 ft. wide. When docking the 2 anchors are let go in that pocket where enough water exists to prevent any collision of the ship with her own anchors.

The East side of the pier still has the original depth.

The bottom alongside is mud and sand. The ore ship loader has a pier straddle clearance height of 14 ft. and width of 12 ft. thus restricting the size of cargo parcels placed on the pier when the gantry is positioned inshore.

Berthing and Mooring: Vessels calling at San Nicolas for the discharging of general cargo must berth on the East side of the pier with the starboard side of the ship to the pier. Such vessels use their own regular mooring lines. Only ore in slurry form is loaded at this side through 20 in. pipe-lines.

Ore vessels berth at the West side of the pier with the port side of the ship to the pier. In addition to the vessel's own regular mooring lines, heavy surge lines are compulsory for all vessels loading iron ore. Wires are not permitted as moorings to the pier except when attached to tension winches.

VERY IMPORTANT: While vessels are alongside the pier, engines must be ready for immediate use. Sufficient crew must be on deck at all times to tend mooring lines and heave in the slack as loading progresses. Failure to do so may result in a discontinuance of loading and the vessel being moved out from the berth.

Loading and Unloading: Loading is generally carried out at the rate of about 4,000 long tons p.h. If vessels stops the loading for a period over two (2) hours and there is another vessel waiting for loading turn, the vessel will be undocked and shifted to the anchorage area. The tariff for each operation of docking and undocking is US$ 0.07 per gross ton. The tariff of use of pier is US$ 0.02 per gross ton per day of 24 running hours. These are government tariffs subject to change. Vessels arriving with 50 tons of cargo or less may have a choice of barge rental while at anchor in the bay or have pier discharge subject to loading operation or other cargo vessels discharging at the pier.

Loading: Prior to commencement of loading the Master or Chief Officer will deliver to the port Agent a pre-stowage plan with the following information:

Total cargo required, calculated tonnage per hatch, sequence of loading, fuel on board, water and stores on board in long tons, and calculated draft and trim upon completion of loading.

Tonnage on board at any stage of the loading is available from the Loading Master, the Pilot on board, or at the scale house at the upper end of the pier. In order to avoid last minute delays, it is very important that a constant check be made of vessel's draft, ballast left to discharge and cargo on board during the entire loading. Any change in tonnage of cargo required must be reported to the Port Agent or Loading Master not later than when there is approximately 2,000 long tons remaining for completion of loading, and always in writing.

It is convenient to check drafts, ballast and tonnage of cargo on board each time the loading gantry shifts from one hatch to the next. While loading is actually in progress in a hatch, no loading interruptions are permitted except in case of emergency. At the termination of each pouring, a slip stating cargo loaded and draft readings, will be delivered to the Chief Officer.

In calculating the tonnage required to fully stow a hold, it should be remembered that cargo is spout trimmed only. No trimmers are available at San Nicolas.

Vessels will depart from the pier immediately upon completion of loading. The Pilot will take the vessel out from the berth. If the Master wants to anchor in San Nicolas Bay prior to proceeding to sea, he must advise the Pilot who will in turn advise suitable anchorage. The Master will advise the Pilot of the estimated time of departure in order that this may be reported to the Port Captain.

Delays of port operations, as well as delays of other vessels waiting to berth, caused by a vessel which for any reason is not prepared and able to move from the pier when so ordered, are chargeable to the vessel which causes the delay.

Clearance papers, bills of lading, statement of facts and all necessary papers for clearance of the vessel will be delivered shortly after completion of loading, outside of the pier by boat. This can be accomplished while the vessel is being moved from the berth, or at anchor, but never alongside the pier when other vessels are waiting for loading turn.

Slurry: For the new flow system a 20 in. diameter pipe-line has been installed and vessels adapted for slurry transportation can load either at the East or West side of the pier, depending on size and draft of the vessel. Hourly loading rate has not been determined so far but is expected to make over 2,000 long tons p.h.

CRANES: Nil.

MEDICAL: All medical attention may be arranged.

STEVEDORES: *Working Hours:* 0800–1200, 1300–1700, 1800–2400, 0100–0700 hrs.

TANKERS: On the West and East side piers there are 3 raisers to which 3×8 in. diameter hoses can be connected to a main pipe-line of 16 in. diameter for the discharging of bunkers C. Flanges are U.S. Standard (ASA). Location on the pier is for midship connection on vessels. Maximum pressure permissible is 125 lb. p.s.i. and maximum temperature 150° F. The length of the 16-in. pipe-line from the manifold on the pier to the storage tanks is 4,985 ft. There are 2 storage tanks of 66,995 bbls. gross capacity each and 1 storage of 251,423 bbls. gross capacity. Total capacity 385,413 bbls. The height of the tanks above MLW is 142 ft. to the bottom and 190 ft. to the top of the tanks. The intakes to the tanks are at the top.

Diesel oil discharged on the East side of the pier, using one hose to an 8-in. diameter pipe-line. Flanges are U.S. Standard (ASA) with 8 bolt holes. The length of the 8 in. pipe-line from the hose connection to the storage tanks is 3,577 ft. Maximum permissible pressure is 125 lb. p.s.i. There are 2 diesel oil storage tanks of 7,342 bbls. gross capacity each (total capacity 14,684 bbls.).

The height of the tanks above MLW sea level is 145 ft. to the bottom of the tanks and 177 ft. to the top of the tanks. Intakes to the tanks are at the top. There is no booster pump on the pipe-line.

There is a crew on the pier to sling the hoses; the vessel's crew is required to operate the winch, boom, hoist the hoses on board, and connect same to vessel's manifold.

BALLAST: Special attention is called to ballast requirements of vessels which do not need ballast in order to enter under the loading boom. Such vessels are required to carry sufficient ballast for safe handling during berthing. It is permissible to discharge clean ballast at the pier. Air draft is 39 ft.

FRESH WATER: None available.

FUEL: None available.

GANGWAY/DECK WATCHMEN: Recommended by crewmen to prevent stowaways.

OPENING/CLOSING HATCHES: Stevedores/crew.

CARGO GEAR: Ore-loading boom extends 60 ft. from face of pier fender, and can be retracted from this position to a minimum length of 29 ft. Gantry with loading boom is mobile. Range of its mobility is 885 ft. starting at a point 110 ft. from the head of the pier. Shifting of vessels during loading is therefore not required. Height from water to underside of boom is 41 ft. Vessels must be ballasted so that height of any coaming or any other objects in the vicinity of the hatch where loading is to start will not exceed 39 ft. above waterline.

IDENTIFICATION CARDS: Required.

CONSULS: At Lima.

REPAIRS: Except in extreme emergency, repairs cannot be effected at this port.

TELEPHONES: None available.

REPATRIATION: In cases where crew changes are to take place in San Nicolas, at least 7 days advanced cable notice is required to obtain the necessary Immigration authorities permission. The advanced cable must set forth name, nationality and passport number.

HOLIDAYS: See "Ilo".

GENERAL: Official hours for port officials are from 0700 to 1100 and 1300 to 1800 hrs. Upon request, port officials will board vessels at any time day or night, Sundays and holidays included. Office hours are from 0800 to 1700 hrs. Monday to Friday, Saturday 0800 to 1200 hrs. Overtime for such service is for account of vessels.

Emergency Signals: A number of short blasts on the whistle indicates an emergency. The whistle will not be used except for emergency in accordance with Peruvian regulations.

SHORE LEAVE: Shore leave may be granted at the Master's discretion. All crew members must be issued ship's passes before proceeding ashore. These must be shown to the Immigration authorities when required. Peruvian laws and Immigration Regulations must be strictly adhered to in order to avoid unnecessary difficulties. Crew members are not permitted to travel 100 km. outside of San Nicolas. – San Juan port areas without written authorisation or pass from the Master approved by Immigration authorities.

REGULATIONS: Cargo holds must be properly cleaned. In this respect special care must be taken where vessels prior to their arrival at San Nicolas have carried the following cargoes: Gypsum, Phosphate, Pyrite, Coal, Sulphur, Silica, Aluminium, Sand, Gravel, or Quartz, or any other ore containing Arsenic, Phosphorus, Sulphur, Silica, Aluminium, or Copper. Prior to commencement of loading, cargo holds will be inspected by a representative of the Shippers. It is recommended that the Master or a ship's officer accompany the cargo hold inspector during the inspection.

AGENT: Agentes Navieros San Nicolas, S.A. P.O. Box 1229 Lima. Cables: "Agnav Sannicolas".

SUPE: 10.48 S. 77.45 W.

Supe is about 84 miles North of Callao. Cargo operations are undertaken in an open unprotected roadstead. The main activities at the port are the loading of fishmeal and discharging of fertilisers, cellulose and chemical products.

PILOTAGE: Not available.

ANCHORAGE: Vessels anchor in the open roads.

RADIO: *Arrival Advice:* 24 hours Notice of Arrival should be sent to the Captain of the Port and the Agent.

TUGS: 8 tugs available, 1 of 65 h.p., 2 of 85 h.p., 4 of 134 h.p., and 1 of 165 h.p.

BERTHING: There is a pier for mooring barges length 331.5 m.

LIGHTERS: 32 (14 of wood and 18 of steel) for dry cargo only. The capacity of the lighters varies from 50 to 100 tons. Total capacity being 2,100 tons.

CRANES: 3×9 tons and 1×11 tons.

STEVEDORES: See "Pimentel" for working hours and overtime rates.

5 gangs of 9 men available.

MEDICAL: There is a hospital at Barranca.

TANKERS: *Submarine Pipe-line:* One line 10 in. diameter for dirty products and one line 8 in. diameter for clean products. Depth of water 48 ft. At Paramonga there is a 10 in. line, depth 36 ft.

FRESH WATER: Not available.

FUEL: Not available.

GENERAL: *Swell Period:* June/August.

AGENT: See "Callao".

TALARA: 04.35 S. 81.17 W.

DOCUMENTS, and all general information, refer to "Callao".

PILOTAGE: Compulsory. In the vicinity of Talara there are several off-shore oil drilling platforms and near the entrance to the port there is a shallow of 24 ft.

ANCHORAGE:

Summer	04° 34′ 09″ S.	81° 17′ 36″ W.	9.25 Fathoms
Winter	04° 34′ 12″ S.	81° 17′ 29″ W.	10 Fathoms
3rd Place	04° 34′ 03″ S.	81° 17′ 42″ W.	6-10 Fathoms

RADIO: Arrival Notice should be sent at least 24 hours before arrival to Captain of the Port and Agent via the government radio station OAH. Station on 500kc/s. from 0800 to 2400 hrs.

TUGS: 1×13.5 h.p.

BERTHING: At Talara there are two berths for loading fuel and water; one is a regular quay, the other a petroleum berth in which vessels lie, moored to dolphins alongside hose platform.

Quay length 385 ft., depth alongside 18 ft. to 34 ft.

Petroleum berth, length 585 ft., depth alongside 34 ft.

Talara is mainly a bunkering port as it is the main port for the Northern Peru Oilfields. The little general cargo discharged is done at the quay; bunkering being done at the quay and at the dolphin berths.

Larger vessels load/discharge into lighters at anchorage. Seven lighters are available, total capacity 1,400 tons.

CRANES: 3×5 tons, 1×31 tons and 1×22.5 tons.

TANKERS: See "Berthing".

Submarine Pipe-lines: 12-in. diameter. Vessels with a max. draft of 36 ft. can moor to the pipe-line.

STEVEDORES: It is possible to work 24 hours a day with interruptions at meal hours. Three gangs of 16 men each available. Overtime only charged for Sundays and holidays at 50%.

FRESH WATER: Available alongside berths.

FUEL: Available alongside berths. Bunker "C" 3,500 seconds, Petroperu No. 5 (Intermediate 4) 400 seconds, Diesel 2 (marine diesel).

MEDICAL: A private clinic is available.

CONSULS: Panama and Nicaragua.

REPAIRS: Minor repair facilities.

GENERAL: Smoking is prohibited on deck, at the piers and near the refinery installation.

AGENT: See "Callao".

Philippines

GENERAL:

DOCUMENTS: *To be submitted in all Government & Private ports:*
1 copy of Quarantine Pratique.
6 copies of the Inward Cargo Manifest for all cargoes to be discharged in the Port.
2 copies of Cargo Storage Plan or Hatch List.
3 copies of Store List.
3 copies of Passenger List.
4 copies of the Crew List.
4 copies of the Crew Declaration List.
3 copies of Bonded Store List.
3 copies of Firearms and Ammunition Inventories.
3 copies of List of Drugs and Narcotics.

Original copies of all through cargo manifest destined to other ports to be deposited with the Customs Inspector on board and to be returned to the Master prior to the departure of the vessel.

Clearance from the last port.

SHORE LEAVE: Nationals of countries with whom the Philippines maintains diplomatic relations are allowed ashore after securing a pass from the Immigration Officer in the Port.

REGULATIONS: We quote below pertinent sections of PPA Administrative Order No. 13–77 regarding PPA General Port Regulations on Arrivals/Departures of Vessels and Berthing Regulations:

Article II – Arrivals and Departures

Section 4. *Notice of Arrival* – The Owner or Agent of every vessel other than a vessel of 100 g.r.t. or less, intending to call at a port shall, within the time specified in Section 29 of these Regulations, prior to the ETA, give notice in writing to the Authority of its arrival, and make application for a berth if it is intended to berth at the wharf, pier, or anchorage within the Port, Port District or harbour limits.

Section 5. *Particulars to be furnished* – The notice of arrival and the Application for a Berth shall be a form prescribed by the Authority and shall contain full particulars regarding:
(a) Name of vessel and its flag.
(b) The Gross Registered Tonnage (g.r.t.) and Net Registered Tonnage (n.r.t.).
(c) Draft, LOA, and beam.
(d) Names of the Owner, Master, ship's Agent in the port of call.
(e) ETA and ETD of vessel.
(f) Tonnage of cargo to be discharged and loaded.
(g) Dangerous Cargo (Whether to be discharged or not).
(h) Number of passengers, disembarking and embarking.
(i) Any other pertinent information relating to the working (e.g. heavy lifts) or safety of the vessel in the port.

Section 6. *Hoisting of National Colours* – The Master of every vessel entering or leaving a port between sunrise and sunset shall cause to be hoisted its national colours and signal letters, if any. The national colours shall continue to be exhibited while the vessel remains in port.

Section 7. *Immigration and Quarantine Signals* –
(a) The Master of every vessel arriving from a foreign port shall exhibit the Customs, Immigration and Quarantine signals as prescribed by those government agencies. Such signals shall remain hoisted until the proper officer has given the permission to lower those signals.
(b) No vessel other than an authorised vessel shall approach within 200 m. to a vessel which is exhibiting the Immigration, Health, or Customs signals. An authorised vessel shall mean an Immigration, Health, Customs, Pilot Launch, or Philippine Coast Guard (PCG) vessel.
(c) No person other than a Pilot or authorised government officer(s) may board or disembark from any vessel coming from a foreign port until the vessel is cleared by the Immigration, Quarantine, Customs and PCG officers and the respective signals have been lowered.

Section 8. *Securing of Vessel before Discharge/Loading* – Every vessel entering a port shall be anchored or properly secured to a wharf, pier, or buoy before commencing the loading or discharging of cargo, and/or the embarkation or disembarkation of passengers.

Section 9. *Port Clearance* – No vessel shall leave a port unless in possession of a valid PPA Port Clearance issued by, or on behalf of, the Authority, in addition to the requirements of other government agencies and the final clearance issued by the PCG.

Article IV – Berthing

Section 29. *Berthing Regulations* –
(a) The allocation of a berth belonging to, or operated by, the Authority shall be at the Authority's discretion.
(b) A vessel shall be considered for berthing allocation only after the Agent of said vessel has filed an application for berth.
(c) All applications for berthing at pier/wharf/anchorage shall be submitted 24 hours before arrival for vessels on scheduled runs and 36 hours for tramping vessels (without regular schedules). In either case application should be filed within sufficient allowable time.
(d) All applications received after berthing meeting shall be deliberated upon the following day before the actual arrival of the vessel.
(e) No vessel shall be berthed or unberthed alongside a wharf or pier belonging to, or operated by, the Authority without its permission or contrary to its directions, nor shall any vessel occupy a berth other than the berth allocated to said vessel.
(f) First-come-first-served basis shall be the general rule in determining berthing priorities of vessels, subject to the exceptions hereunder provided. Vessel's arrival will mean the time a vessel drops anchor at the Anchorage Area when there is no available area or the time a vessel reaches the Port's Boarding Area when a berth is available.
(g) When the available berthing space is inadequate for berthing a larger vessel having the priority to berth, the smaller vessel next in priority which can be accommodated shall be allowed to berth on condition that should additional space be made available such that the larger vessel can be accommodated, the smaller vessel shall be moved to the anchorage to allow the larger vessel to berth.
(h) The Pilot manoeuvring a vessel to berth shall be advised by the Authority as to the position or berth which the vessel will occupy and the vessel shall comply with the directions or instructions therefor of the Authority and/or the Pilot.
(i) When a vessel scheduled to berth encounters some mechanical troubles thereby restraining said vessel from docking, an allowance of one (1) hour shall be given for repairs. If after the lapse of this grace period, said vessel is still inoperative, the priority to berth shall be passed on to the vessel having the next priority to berth.
(j) Vessels with berthing priority but scheduled to depart the following day shall be allowed to berth to allow passengers to disembark. Provided, however, that said vessel shall pull-out from berth to give way to passenger vessel scheduled to depart on the same day.
(k) Any vessel intending to berth solely for the purpose of loading fresh water, bunkering or victualling, before such vessel will be able to depart for another port, shall be given priority over other vessels, provided that such stay shall not exceed the time fixed by the Authority.
(l) Government-owned vessels on official business, vessels of foreign government not engaged in foreign trade, vessels under stress, and vessels carrying perishable articles or goods shall be given berthing priority over other vessels.
(m) Whenever practicable, passenger liner or tourist vessel shall, subject to the discretion of the Port Manager/OIC, also be given priority of a limited number of hours stay at berth over purely cargo vessel.
(n) Berthing priority of any vessel shall not be waived in favour of another vessel.
(o) Vessels waiting for cargoes shall be moved to anchorage to allow the next vessel to berth. However, said vessel shall be allowed to berth again, provided that cargoes for loading are ready, unless another vessel is allowed to take the berth temporarily by the Authority.
(p) Domestic vessels may be allowed by the Authority to dock at berths designated for foreign vessels if there are no other vessels waiting to dock at such berths.
(q) Shut-down time caused by heavy rains and other major calamities or accidents which will stop work on a vessel shall be excluded from the time limitation prescribed herein. However, breakdown of lifting gear and also loading of fresh water, bunkering and victualling which should be done simultaneously with cargo handling operations shall not be considered as reason for time extension.

ANTIMONAN: 14.00 N. 121.55 E. (See Plan Book)

SHIPMASTER'S REPORT: 1976.

Berth in position 14° 00′ 30″ N., 121° 55′ 30″ E. Vessel required to be ballasted to one third deadweight. Tidal range 6 ft. Nature of bottom at berth, mud and sand. Density 1025. Anchorage 0.5 mile S.E. of jetty.

Terminal Information: Ship's hoses used to rail only. Length of shoreline, 3,000 ft. diameter 8 in. Products handled at the berth, coconut oil and pellets of copra.

Port Information: Pilotage compulsory. Notice of 24 hrs. and 12 hrs. required. Pilot boards from a small catamaran flying the pilot flag. Boarding position 2 miles S.W. of the port. Vessel is able to enter or leave at any stage of the tide. Vessel cannot enter after dark and it is not advisable to leave after dark as some of the piles on the sea bed near the jetty are broken. Also there are no navigation lights in the bay and many vessels are fishing. Max. LOA 650 ft. Max. beam 100 ft. Max. draft 44 ft. No tugs available. Radio station used, Manila, though messages delayed in receipt at Antimonan.

Facilities available. Fresh water in small quantities for cash. Fresh provisions, groceries and meats in small amounts, doctor and hospital.

No repair facilities, laundry, fuel or slop facilities.

Improvements: The face of the jetty is being piled and breasting dolphins created. Completion expected by mid 1977.

At the present time a barge is inserted between the ship and jetty as the piling is broken.

APARRI (Including Port Irene, San Vicente, Claveria and Divilacan): 18.22 N. 121.38 E. (See Plan Book)

PORT LIMITS: Quarantine anchorage or loading point.

DOCUMENTS: *Before the vessel's arrival:*
Submit/transmit to Philippine Ports Authority (PPA-PMU) Aparri, the vessel's Notice of Arrival, at least 48 hours before ETA for foreign vessels and 24 hours before ETA of domestic vessels.

Upon vessel's arrival:
Submit to PPA-PMU-Aparri a copy of the following documents:
Inward Foreign Manifest (for foreign vessels); Coasting Manifest (for domestic vessels)
Passenger Manifest
Crew List
Stowage Plan/Hatch List
Transit Cargo/Manifest (if any)
Oath of Master
Vessel's Roll Book – to be temporarily filed
Vessel's Information Sheet – to be accomplished

Before Vessel's departure:
Submit to PPA-PMU-Aparri a copy of the following documents:
Outward Foreign Manifest (for foreign vessels); Coasting Manifest (for domestic vessels)
Passenger Manifest
Transit Cargo Manifest (if any)
Oath of Master

Entrance and clearance formalities in the traditional sense of the terms of foreign and domestic vessels shall remain with the Bureau of Customs until Port Management Unit's own clearance is duly stamped in the Manifest and after all port charges, fees, dues and other charges had already been paid.

Payment of charges leviable against the vessel and cargo shall be made either in cash, Manager's or Cashier's Check to the Port Management Unit.

Notice must be transmitted to Port Management Unit Office of Aparri when Export Entry is processed and Wharfage fee is paid to the Philippine Ports Authority – Manila.

PILOTAGE: ETA to be sent to Aparri Pilotage Station, Aparri, Cagayan.

Pilot Boat is a motorised launch.

ANCHORAGES:

Port of Aparri: Boundaries – Lat. 18° 22′ 39″ N., Long. 121° 35′ 33″ E. Depth – 11 fathoms.

Port Irene: Boundaries – The portion between Nulton Pt and Batulinao Pt. This bay known as Casambalangan. Depth – 12 m.

San Vicente Port: Boundaries – Lat. 18° 30′ 43″ N. Long. 122° 08′ 26″ E. Depth – 15 fathoms.

Sub-port, Claveria: Boundaries – Between Centenela and Lacaylacay Pt. Depth – 15 fathoms.

Port of Divilacan: Depth – 11 fathoms.

RESTRICTIONS: Enter channel at daytime only.

RADIO: RCPI. TELEFAST. PT & T. TELECOM. All in Aparri, Cagayan.

VHF: RCPI. TELEFAST. PT & T. TELECOM. All in Aparri, Cagayan.

RADAR: Pagasa Weather Bureau Radar, located in Bukig, Aparri, Cagayan.

TUGS: Available at Claveria, Aparri and Port Irene.

BERTHING:

Port of Aparri: Anchorage area. Ship's-side loading and ship's own gear. Cargoes handled at Shipper's log pond.

Port Irene: One available berth. Ship to pier with ship's derricks. Cargoes to be handled at a specified reclaimed area.

San Vicente: Anchorage area.

Sub-port, Claveria: Anchorage area. Ship's-side loading and ship's own derricks. Cargoes handled at Shipper's warehouse log pond.

Port of Divilacan: Anchorage area. Ship's-side loading and ship's own gear. Cargoes handled at Shippers log pond.

CRANES: Truck mounted cranes.

BULK CARGO FACILITIES: None.

SPECIALISED CARGO HANDLING FACILITIES: None.

BRIDGES: No bridges.

STEVEDORES: North Luzon Stevedoring and Lighterage Service, Aparri, Cagayan.

MEDICAL: Aparri Hospital.

TANKERS: River stream-draft 16 ft. Discharge lines are through depot discharging pipe-lines Aparri, Cagayan.

DENSITY:
Port of Aparri – 30%.
Port Irene: Salt.
San Vicente Port: 30%
Sub-port, Claveria: 30%
Port of Divilacan: 30%

FRESH WATER: None.

FUEL: Diesel, gasoline and kerosene.

FIRE PRECAUTIONS: None.

CONSULS: None.

REPAIRS: None.

DRY DOCKS: None.

SURVEYORS: None.

GANGWAY/DECK WATCHMAN: Available from Stevedore in Aparri.

HATCHES: Normally carried out by crew and stevedore.

CARGO GEAR: Cranes.

REPATRIATION: With permission of Bureau of Immigration, Aparri, Cagayan.

AIRPORT: Flights Monday, Wednesday and Friday.

TIME: GMT + 8 hrs.

HOLIDAYS: Philippines Ports Authority, operations personnel served Special and legal holidays.

POLICE/AMBULANCE/FIRE: No telephone. Aparri Integrated National Police Station, Aparri, Cagayan. Aparri Emergency Hospital, Aparri, Cagayan. Aparri Fire Department, Aparri, Cagayan.

TELEPHONES: None.

SHORE LEAVE: Request permission from the Bureau of Customs.

SERVICES: None.

IDENTIFICATION CARDS: Issued by the Bureau of Customs and Philippine Ports Authority.

REGULATIONS: See "General" before first port.

DELAYS: Weather conditions.

AUTHORITY: The Collector of Customs, Bureau of Customs, Aparri, Cagayan.

BATAAN, Limay: 14.30 N. 120.38 E.

See "General" before first port.

PILOTAGE: Pilotage is compulsory, pilots assigned by the Manila Pilots Association. Pilot boards vessel just off the berth.

ANCHORAGE: There is a good anchorage with depth of 9.1 m.–11.3 m.

RESTRICTIONS: Approaches are open deep water. Vessels may berth and unberth at any hour and any stage of the tide. Keel clearance of 10 ft. required.

MAX. SIZE: LOA 1,000 ft. Max. draft 50 ft.

RADIO: Manila Radio. At the berth, shore communication with vocaline JRC 475 transceivers on 465 Mc/s.

HEALTH: Port health officials board with the Pilot. Radio request for free pratique can be made prior arrival.

TUGS: Available.

BERTHING: *Crude berth:* Conventional buoy mooring, tankers moor to eight buoys, in depth of 60 ft. Hoses may be connected on either side. 4×12-inch hoses for crude oil discharge.

Products Pier: Inner berth depth 13 ft. Outer berth depth 32 ft. Can accommodate vessel up to 530 ft. length. No slop discharge facilities available.

Private Piers

	Length (m.)	Width (m.)	Depth (m.)
Bataan Refining Corp.	343.20	15.90	9.90 to 30.00
Planters Products	317.99	n.a.	14.60
LPG Pier	24.60	3.00	5.40

DENSITY: 1025.

MEDICAL: Doctor and hospital facilities available. Advance notice required of any medical attention needed.

FRESH WATER: Not available at berth. Can be supplied by barge.

FUEL: Bunkers, fuel and diesel, obtainable from berth, advance notice required.

REPAIRS: No facilities available.

CERTIFICATES: Those required are.
Certificate of Registration.
Certificate to Operate.
Certificates of Officers and Engineers (Licenses).
Officers and Crew-Seaman's book.

CUSTOMS ALLOWANCE: 200 cigarettes for each crew member, and one bottle of liquor for each crew member.

IDENTIFICATION CARDS: Essential.

REPATRIATION: Effecting crew changes and arranging necessary repatriation are carried out by the Immigration Office in the port with the assistance of the ship Agent and the Foreign Embassy concerned.

TIME: Local Civil Time is 8 hours ahead of GMT. This time reckoning is constant throughout the year.

HOLIDAYS: New Year's Day (1st January); Bataan Day (9th April); Holy Thursday (variable); Good Friday (variable); Labour Day (1st May); Independence Day (12th June); Republic Day (4th July); All Saints' Day (1st November); National Heroes Day (30th November); Christmas Day (25th December); Rizal Day (30th December). When any holiday falls on a Sunday, the following day (Monday) is by law considered a public legal holiday. As a general rule, employees of the government in the Philippines do not work on Saturdays. Cargo work on board vessels on these holidays can be arranged.

GENERAL: Customs Inspector and two guards accommodated on board during vessels stay.

AUTHORITY: Bureau of Customs.

BATANGAS, Luzon (including Tabangao): 13.45 N. 121.03 E.

See "General" before first port.

PORT LIMITS: Batangas Harbour embraces all waters of Batangas Bay extending seaward up to an imaginary line connecting Cazador Point and Matuco Point.

DOCUMENTS: Upon arrival, the following papers should be forwarded to the authorities:
2 Crew lists (visaed).
3 List of Stores, Deck, Engine, Stewards Dept.
3 List of Stores, Firearms, Medicine and Narcotics.
6 Personal Effects Declaration.
6 Inward Manifest.
8 Ordinary Crew List.
Clearance from last port of call

PILOTAGE: Pilotage for shifting from quarantine anchorage, docking and undocking compulsory for all vessels engaged in foreign trade. The vessel is met by the harbour pilot approximately 2 miles South of the wharf. Pilotage for entering the Batangas harbour and anchoring in the quarantine anchorage is optional but pilotage for shifting therefrom or changing in the stream is compulsory for vessel engaged in foreign trade. At least 48 hours before ships arrival, advise ship's Agents of estimated time of arrival (ETA).

Visual Signals, "I need a Pilot" – The single hoist of the International Code flag "G".

Sound Signals – "I need a Pilot" – the International Morse Code "G" or 2 prolonged blast, followed by 1 short blast of the ship's siren.

Pilot Launch: 25 GRT white with a black "P" at both sides of bow and with International Code Flag "H" hoisted. At night time, all around white light on top of a red light in a vertical line, with green and red sidelights.

APPROACHES: "Suggested Approach" From the South between Matuco Point and Malajibomanok Islands, with an opening of 3.5 miles. White flashing beacon on Malajibomanok Island duration 0.3 seconds every 10 seconds visible for 8 miles in clear weather. Islands and point can be approached within 0.5 mile.

Landmarks and Coastal Lights: Government pier at Bo. Sta. Clara may be approached safely from either direction paralleling its face. Batangas church dome, Bauan church bell tower, refinery stacks and columns and wharves are good landmarks. Batangas lighthouse is Gp. F. (3) green every 5 seconds.

ANCHORAGE: All vessels entering Batangas harbour shall show their colours and signal letters shall be kept flying until the vessel is boarded by the proper officials within two (2) miles before arriving at the designated quarantine anchorage.

1. 13° 45′ 06″ N. 121° 02′ E. Quarantine
2. 13° 45′ 13″ N. 121° 02′ 14″ E. for vessels less than 1,000 g.r.t.
3. 13° 45′ 06″ N. 121° 02′ E. for vessels over 1,000 g.r.t.
4. 13° 45′ 30″ N. 121° 01′ 55″ E. for vessels over 3,000 g.r.t.
5. 13° 45′ 30″ N. 121° 01′ 42″ E.
6. 13° 46′ N. 121° 01′ 15″ E. for Caltex wharf
7. 13° 43′ 35″ N. 121° 02′ 50″ E. for Shell wharf
8. 14° 42′ 54″ N. 121° 03′ 06″ E. for Pacific flour mills pier
9. 14° 46′ 18″ N. 120° 58′ 15″ E. for Batangas Bay Terminals, inc. pier.

MAX. SIZE: See "Berthing and "Tankers".

TUGS: Tug service is not furnished by the two oil refineries. The use of a tug for berthing and unberthing is required. Although a tug is normally available at Batangas it may be necessary to dispatch a tug from Manila. Accordingly, it is important for Masters of vessels to provide at least 48 hours advance notice of ETA to ensure the availability of the tug boat.

BERTHING: Berthing may be done any time during the day or at night and Masters should exercise their own judgement in this respect. Vessels moor either port or starboard side to, depending on prevailing conditions.

Batangas Govt. pier:

	Length (m.)	*Width (m.)*	*Depth (m.)*
Pier I	127.5	15	9.00
Pier II	105.0	15	7.50 wharf
	48.0	12	
Pier III	84.0	15	2.67

Bauan and Mainaga pier:

Bauan: Latitude: 13° 46′ 48″ N.
Longitude: 121° 04′ 06″ E.
Mainaga: Latitude: 13° 35′ 48″ N.
Longitude: 120° 57′ 12″ E.

Alternative loading or discharging ports, but only in cases when there is congestion at the government piers at the Port of Batangas.

Pacific Flour Mill: Location: The area contained from the Southernmost pile of the Shell Refinery to the area West of Little Tabangao River extending 1 mile Westward.

Max. Size: LOA 492 ft., draft 45 ft.

Pier: Length 93 m. with 142.5 m. causeway, width 7.5 m., depth 14 m.

Special Regulations:

(A) That a navigational and mooring area of 0.5 mile from the Northernmost and Southernmost mooring dolphins of the PFM pier be free from fish traps and other fishing devices.

(B) That a freeway from incoming and outgoing vessels from the PFM pier be kept free from all fish traps of any forms, and/or any other fishing devices that may obstruct navigation for a distance of 0.5 mile North and South of the PFM pierhead outside of the 50 ft. depth contour approach to the pier.

Batangas Bay Terminal, Inc: Pier facilities: 3 breasting dolphins 80 m. apart; 2 fender piles (wooden) and 2 mooring dolphins. Causeway 290 m. long.

Max. Size: LOA – 700 ft. Draft – 39 ft.

Location: The Batangas Bay Terminal, Inc. located at 13° 47′ 00″ N., and 120° 59′ 02″ E. It is in Bo. Bolo, Bauan, Batangas, the total area (shoreland) is 5.5 hectares and 18 hectares (foreshore) land.

Special Regulations:

(A) That the area contained between the S.W. site of the BBTI for a distance of 1 mile from shoreline North and South be entirely free permanently from all forms of fishing devices.

(B) That a distance of 100 yards around the pier be entirely free from all forms of fish traps, fish corrals, fish weirs, etc. and it be "Off Limits" to all unauthorised persons, including fishermen and those travelling by bancas underneath the said pier.

Luzon Stevedoring Corporation (Sta. Rita pier):

Max. Size: LOA – 340 ft. Draft – 14 ft. Pier: Length – 97 m. Width – 4.87 m. Depth – 18 m.

Luzon Stevedoring Corporation (Energy Base):

Max. Size: LOA – 426 ft. Draft – 25 ft.

All vessels proceeding to Batangas should radio either Caltex or Shell, whichever is their destination, their estimated time arrival at Batangas as early as possible, but not less than 96 hours before arrival, amending this ETA subsequently if it varies more than 2 hours from the original estimate in order to arrange towing gangs with the Luzon Stevedoring Corporation.

Vessels Loading Sugar: See "Iloilo – Shipmaster's Report".

STEVEDORES: Stevedoring is usually handled by Luzon Stevedoring Corporation.

MEDICAL: Both refineries have small hospitals for handling emergency cases. Should any ship's personnel need prolonged hospitalisation, arrangement will have to be made to transfer the patient to Manila or to the Provincial Hospital of Batangas where suitable medical attention is available. Dental treatment can be obtained from local dentists in the town of Batangas.

TANKERS: *Shell Refinery, Tabangao*. Jetty 1; two hoses of 10 in. diameter. Jetty 2; 4 arms of 12 in. diameter. Slops acceptable at 500 t.p.h. up to limit of 3,000 tons.

Two wharves with the following dimensions:

(a) Length 336 m. Concrete	(b) Length 700 m. Concrete
Width 9 m.	Width 9 m.
Depth 15 m.	Depth 15 m.

Crude oil is delivered by tankers of up to about 75,000 d.w.t.

Caltex Refinery Wharf. The Caltex Refinery including the island wharf is located North of the government pier and at night can be distinguished by illumination lighting on its structures and red aviation warning lights at the top of the columns. A gas flame at the top of the 150 ft. flare stack is also visible several miles from shore. The Caltex wharves are adequately lighted to facilitate night berthing or unberthing operations if desired. LOA – 755 ft. Draft – 41 ft. Jetty designed for 45,000 d.w.t.

Location: Lat. 13° 48′ 24″ N. Long. 121° 01′ 00″ E.
Lat. 13° 46′ 12″ N. Long. 121° 01′ 36″ E. (service wharf)

Construction: 2 wharves with the following dimensions:

T-Head: Length – 84 m. Width – 13 m. Depth – 14 m. with 2 mooring buoys 244 m. apart parallel to the berths facing the shoreline.

Island Wharf: 2 breasting dolphins 91 m. apart. Length – 16 m. Width – 12 m. Depth – 27 m. with unloading platforms installed in between the dolphins and provided with 2×125 ton quick release hooks and 2×125 ton bollards.

Crude oil is delivered by 200,000 to 300,000 d.w.t. supertankers.

Special Regulations:

(A) That a distance of 100 yd. around each of the 2 wharves (including island wharf) be entirely free from all forms of fishing devices such as "bonbons", fish corrals, fish weirs etc., and that it be "Off Limits" to all unauthorised persons, including fishermen and those travelling by bancas within the areas.

(B) That a navigational and mooring area of 0.5 mile North and South respectively of the limits stipulated be likewise free from fish traps and other fishing devices, but with option to fishermen to fish with hooks or with bancas within the said area provided that they do not come within 100 yd. around the jetty.

(C) That a freeway incoming and outgoing vessels from the Shell Refinery piers be kept free from "bonbons" and/or any other fishing devices that may obstruct navigation for a distance of 0.5 mile North and South of the jetty head outside of the 50 m. depth contour approach to the jetty.

DENSITY: 1.026.

FRESH WATER: Fresh water is available to vessels loading, unloading or bunkering at Batangas Port. It is delivered to the vessel through hose connections. The water satisfies the physical and chemical requirements for drinking water.

FUEL: Bunkers are available from the 2 refineries. Prior advice should be given through the ship's Agent.

FIRE PRECAUTIONS: At both refineries smoking or open fires are prohibited on the wharves or on vessels alongside or within 100 yards of either wharf. Furthermore, each vessel's personnel is responsible for the safety of its own ship at all times.

CUSTOMS ALLOWANCE: Sufficient amount for crew's consumption while in port.

IDENTIFICATION CARDS: Not required in the Port of Batangas.

CONSULS: Consulates are stationed in Manila.

REPAIRS: Keppel, Philippines: (Finger Pier) Total berth of 300 m. with deep water, provides facilities for repair of vessels of up to 5,000 d.w.t.

Cranage: 1×5-ton travelling crane on floating deck; 2×37-ton crawler cranes; 1×12-ton mobile crane.

Hull shop: 80 m.×22 m. covered workshops equipped with 2 units 10-ton overhead travelling crane; 1×750 ton×6 m. long flanging press; 1×500-ton hydraulic portal press.

Machine shop: 80 m.×14 m. covered workshop equipped with 1×5-ton overhead travelling crane, 1×10 m. long×800 m. swing lathe, other lathes, milling machines, drilling machines, etc.

Electrical shop: Facilities for electrical repairs, rewinding, insulation repairs, etc., other shops are pipe and carpenter shop to give full range of services for new constructions and repairs.

DRYDOCKS: Keppel, Philippines has its floating dock with the following data of information: Max. length of vessels, 110 m.; Max. beam of vessels, 19 m.; Max. draft of docking, 5 m.

REPATRIATION: Pre-arrangement by ship's Agent and/or Master of the vessel and the Immigration Officer assigned on board the vessel.

AIRPORT: At Manila.

TIME: GMT plus 8 hours.
HOLIDAYS: New Year's Day (January 1st); Holy Thursday; Good Friday; Labour Day (May 1st); Independence Day (June 12th); R.P.U.S. Friendship Day (July 4th); Bonifacio Day (November 30th); Christmas Day (December 25th); Rizal Day (December 30th); Special holidays declared by the President of the Philippines are also included. If any other legal holiday falls on Sunday the following day is observed as a holiday. Cargo handling work can be arranged on any or all holidays with the vessel's Agent.
POLICE/AMBULANCE/FIRE: PPA Port Police: 725-2882. National Customs Police: 725-2971. Batangas City Police: 725—2125. Ambulance: 725-2890. Fire Department: 725-2470.
TELEPHONES: At present placing telephones on board foreign vessels is not available; however, telephone service is available on the jetty of both refineries.
GENERAL: Discharge of ballast: No dirty ballast may be dumped into the territorial waters of the Republic of the Philippines. The refineries have provisions for off-loading a limited amount of oil water ballast. Rat Guards: Rat Guards shall be placed on all mooring lines to the wharves and piers.
AUTHORITY: Philippine Ports Authority.

BISLIG, Mindanao: 08.14 N. 126.22 E.

See "General" before first port.
PILOTAGE: Vessel should send direct advice to the Pilot or through its Agents 48 hours prior or at the very least 24 hours before ETA by commercial telegraphy.

There is no VHF operated by the Pilot.

Pilot boat is painted black (hull) and white (bridge and mast). International Code Signals used to call Pilot.

Pilot station is located at Lat. 8° 11.4′ N., Long. 126° 21.2′ E.

Pilot boat will be located (if by prior advice/arrangement by Master requiring specific service of meeting vessel outside of entrance and conducting vessel through channel to inner harbour) at Lat. 8° 16.85′ N., Long. 126° 26.50′ E. or 340°, 2.35 miles off Sanco Pt. Lighthouse.

Pilot will always board a vessel (outside of entrance) via the Pilot's or Jacob's ladder on the leeward side of the vessel.
ANCHORAGE: While waiting for a Pilot, the recommended anchorage (at entrance) is at Lat. 8° 16.1′ N., Long. 126° 26.1′ E. on or about this position and/or within an area of 0.5 miles radius from this point.

Quarantine anchorage or inner harbour is based on the point Lat. 8° 12.9′ N., Long. 126° 22.0′ E. to within 0.25 miles radius from this point as centre, otherwise 1 mile North of BBLCI Pier's end.

Working anchorage at stream. When vessel is through with all the port formalities, she has to go to a working area for loading/unloading operations, thus:

BBLCI. Vessels will anchor at least within a 0.5 mile radius from the tip of BBLCI pier.

PICOP. Is especially preferred during N.W. monsoon at least within a 0.5 mile radius from the foot/base of PICOP breakwater.

Bislig Bay. In general is bounded by a line from *(a)* Sanco Pt. to *(b)* Mawes I. to the N.W., thence to *(c)* the town of Bislig to the S.W., thence to *(d)* the village of Mangagoy to the S.W., and back to *(a)* Sanco Pt.
MAX. SIZE: 30 ft. at PICOP Pier.
HEALTH: Any vessel can be given free pratique if upon inspection everybody is healthy, vessel is clean and all certificates of vaccination are complete. However, if there is a suspicious quarantineable disease, a probationary pratique should be issued and after 6 days, if it was found out that there was no quarantineable disease at all, free pratique will be issued.
RADIO: RCPI, Clavecella and CRC.
TUGS: Tugs normally meet vessel with Pilot at the 5 miles limit and assist Pilot in docking, using ship's lines. 5 available. 4 at 225 h.p., 1 at 112 h.p.
BERTHING: Berthing is on a first-come first served basis. During the N.E. monsoon berthing is in daylight only for precautionary measures.

BBLCI and PICOP maintain 2 piers and 1 marginal pier.

BBLCI: Pier Position 8° 11′ 51″ N., 126° 21′ 55″ W. This is an all concrete pier 800 ft. long and 30 ft. wide with berthing space of 550 ft. on each side. Max. draft 28 ft. at seaward end, 22 ft. at shore end. Both sides are protected by dolphins constructed of pile fenders and large tyres as absorbers. Largest vessel to berth at pier at present is 18,500 tons gross. Lumber, veneer, plywood and logs are loaded at this pier.

BBLCI Marginal Pier. For vessels of less than 1,000 tons gross and 10 ft. draft.

PICOP Piers:

	Length (m.)	*Width (m.)*	*Depth (m.)*
Pier I (concrete)	244	8.0	8.8
Pier II	130	17.7	9.1

There are several patches of reefs projecting N.W. of the channel from Sanco Point to the fairway leading to the PICOP Piers. The port therefore should be entered only during daylight.

January, February and March, the season of the N.E. monsoon, makes it difficult for approaching and securing ship because of strong winds and heavy seas.
CARGO HANDLING FACILITIES: Both companies have ample equipment. Fork lifts, lighters, mobile cranes max. lift 50 ton (BBLCI), and 75 ton (PICOP), sideloaders, trucks and trailers.
STEVEDORES: ETA should be advised 2 days before ship's arrival stating workable hatches and gang requirement for berthing and gang arrangement.

20 gangs available, shifts change at 0600 and 1800 hrs. when port is full. If only few ships in port change at 0600, 1500 and 2300 hrs.
MEDICAL: It is necessary for the Agent to receive advance notice if there is serious medical attendance and hospitalisation. However, less serious medical attendance does not need notification. Port of Bislig has hospital facilities with complete smallpox, cholera, El Tor and typhoid vaccine available.
DENSITY: About 1.025 with tendency to become heavier during dry season and on flood tide.
FRESH WATER: Available at East end of BBCLI Pier. The connection is 2 in., situated 100 ft. from the approach, discharge rate 20 g.p.m.
FUEL: Small quantities available. BBLCI maintain 3 tanks for Caltex.

1. Bunker oil tank	30,000 bbls.
2. Diesel oil tank	11,300 bbls.
3. Gasoline tank	5,100 bbls.

Tank trucks available to deliver oil and gasoline.
DEVELOPMENTS: More berthing facilities are on the programme for the next 3 to 5 years when the pulp and paper mill is in operation. Installation of more log-processing plants to increase shipments.
GANGWAY/DECK WATCHMEN: P1.00 per hour for at least 3 men.
OPENING/CLOSING HATCHES: Rigging of booms is done by ship's crew, while opening and closing of hatches is carried out by stevedores.
CUSTOMS ALLOWANCE: 200 cigarettes and 1 bottle liquor for each man.
IDENTIFICATION CARDS: Needed.
REPAIRS: May be made to ship's gear and equipment by arrangement with BBLCI. The company have an engine repair shop, machine shop and foundry.
AIRPORT: 5 kms. distant; daily flights.
TIME: Local Standard Time is 8 hours ahead of GMT.
HOLIDAYS: On Christmas Day; New Year's Day and Good Friday. Cargo work may be arranged.
GENERAL: Engineering supplies available from BBCLI and PICOP. Dunnage available through BBCLI. Provisions available through chandler or market 1 km. from BBCLI Pier.
SHIPMASTER'S REPORT: June 1978

Bislig Bay – East coast of the Philippines – 8° 15′ N., 126° 25′ E.

Apart from the B.A. Charts Philippine Charts 4627 and 4664 were used. (Available at Manila).

Directions: Experienced an insetting current along the coast before entering the bay. For High and Low water Bislig Bay see A.T.T. Hinatuan, No. 5057.

- (a) The tower at Sancopoint has been destroyed though the foundation (5 m. high) is still visible when not obscured by trees when entering the bay.
- (b) All buoys have disappeared.
- (c) Beacon B was blown away but beacons A & C are conspicuous.
- (d) Prominent Hill of 920 ft. in the direction of 230° was invisible because of morning mist.

Kept beacon "A" on bearing 205° till beacon "C" was 130° and the small island of Agonoy 270°. One way of keeping clear of the shallow depths near the entrance.

Altered course to 230° and steered for the Quarantine Anchorage when Agonoy was 320°.

There is one Pilot available. Pilotage is compulsory. He embarked halfway between Sanco Point and the anchorage from a prao, displaying a large H-flag.

Berthed starboard side to to the East side of the pier with starboard anchor one shackle in the water slacking away when necessary. Observed a noticeable swell on the other side of the pier.

Moored with 3 headlines and 1 spring forward. Two springs from Hatch VI leading forward and 2 lines from the fore-end of Hatch No. V, Hatch No. VI could not be accommodated alongside the wharf. Inferring not to stow any Bislig cargo in that hatch. It is possible but this hampers the despatch as cargo has to be driven by fork lift truck from the deck of Hatch VI to Hatch V.

Two small mooring boats assist in the berthing. On departure these 2 boats assisted in pushing the vessel around.

The normal Quarantine telegram, as for other countries, is not necessary for the Philippines.

Two cabins are required for Immigration and Customs.

Connection with shore: Via the offside gangway and prao. There is a curfew from midnight till 0600 hrs.

Cargo handling: The width of the wharf and the lack of fork lift trucks slowed down operations. Another factor is the presence of another discharging or loading vessel alongside the other side of the pier.

Agency: Agent from our Manila Office flew from Manila to assist the local offices.

Fruits and vegetables available.
AUTHORITY: Collector of Customs.

CAGAYAN DE ORO: 08.30 N. 124.40 E.

SHIPMASTER'S REPORT: June 1978

Anchored 4.75 cables, 337° from the lighthouse. (F.R. 58 ft.) lowered 4 shackles into the water and after dropping slacked away to 7 shackles in the water in 50 fathoms of water.

Moored portside to owing to the distribution of the cargo in hatches Nos. V and VI. The Pilot prefers to berth starboard too.

Fore and aft springs, use nylon ropes (no wires, to facilitate the handling by the boatcrews). Small tugs push vessel alongside. Anchor lowered with 1 shackle in the water, slacking away when necessary.

Cargo handling was good. Pallets were nicely stacked on the wharf. Provisions, vegetables and fruit, available.

Recommendation: Arrivals at daylight only. Consult Agents before signing papers.

CEBU, Cebu Island: 10.18 N. 123.53 E.

(See Plan Book)

See "General" before first port.

GENERAL:

Port of Cebu City: General Description:

Situated at the city frontage between Cebu and Mactan Island. 4,474 m. of quayside (including international and domestic zones).

3 finger piers at 155×32.8 m. The international zone has a length of 451 m., excluding the 2 finger piers.

3 government transit sheds on each pier with a total area of 6,264 sq.m.

Total port area is 423,245 sq.m.

Further, Cebu Harbour has 3 Port Districts as follows:

Port District of Cebu:

(a) The National Main Port.
(b) The Ludo Private Port.

Port District of Mandaue:

(a) The Mandaue Municipal Wharf.
(b) The Ouano Private Wharf.
(c) The San Miguel Corp. Private Wharf.
(d) The Fil Oil Depot Private Wharf.
(e) The Matimco Private Wharf.

Port District of Mactan:

(a) The General Milling Corp. Private Wharf.
(b) The Opon Municipal Wharf.
(c) The Mobil Oil Depot Private Wharf.
(d) The Caltex Oil Depot Private Wharf.
(e) The Shell Island Depot Private Wharf.

PORT LIMITS: The Port Limits of Cebu define as: Cebu Harbour as that portion of the Strait between Mactan Island and the Island of Cebu within the following boundaries: an imaginary line extending from Bantolinao Point, Mactan Island, due North (true) to the Island of Cebu; and an imaginary line extending from Lauis Ledge, Mactan Island, to Lipata Point, Island of Cebu.

DOCUMENTS: *For Entry:*

7 Copies of the Inward Foreign Manifest listing therein all cargoes to be discharged in the port.
4 copies of the Cargo Stowage Plan.
3 copies of the Store List.
3 copies of Bonded Store List.
3 copies of Firearms and Ammunition List.
3 copies of List of Drugs and Narcotics.
3 copies of Passenger List.
3 copies of Crew List.

The original copy of the manifest for all through cargo destined for other ports to be deposited with the Customs Inspector on board.

For clearance:

3 copies of Post Office Clearance (for mail discharged or loaded).
3 copies of Request for Clearance.
5 copies of B.C. Form 101 (Customs Inspector report on departing vessel).
5 copies of B.C. Form 98 (Clearance of Vessel to Foreign Port).
5 copies of B.C. Form 198 (Oath of Master).
3 copies of Quarantine Clearance.
1 copy of Plant and Animal Quarantine Clearance.
7 copies of B.C. Form 88 (Outward Foreign Manifest).
6 copies of B.C. Form 88–A (Statistical Supplement).
5 copies of Master's Oath covering list of officers on board.
5 copies of Crew List.

PILOTAGE: At least 48 hours before arrival, the shipmaster shall transmit to the ship's Agent in Manila through the Coastal Station, Manila Radio (DSZ, operated by the Association of International Shipping Lines), a message indicating the ship's position and the estimated time of arrival (ETA).

In turn, the ship's Agent shall pre-arrange the meeting time at the designated boat station through a telegram to the Cebu Harbour Pilots' Association.

Boat Station No. 1:

One mile off Black Buoy No. 1 in the vicinity of Bantolinao Lighthouse, Mactan Island for foreign vessels coming from the North of Cebu Harbour.

Boat Station No. 2:

One mile off Lauis Ledge, Mactan Island for foreign vessels coming from the South of Cebu Harbour.

For confirmation of arrival within the next 24 hours, the ship's Master may use Radio Marine Station "DYM" to contact the Harbour Pilots and the Port Authority, since VHF communication facilities are not available for the time being.

For possible contact with the harbour Pilots or the Port Authority of Cebu, the approaches are not covered by radar aid, nor by VHF communication, but by watchtower located at Cebu Customs Building.

Visual Signals: Request for Pilot. The single hoist of the international code flag "G".

Sound Signals: Request for Pilot. The international morse code "G" or 2 prolonged blasts, followed by 1 short blast of the ship's whistle.

Pilot Boats:

During night-time:
1. All around white light on top of a red light in a vertical line.
2. Side lights.

During daytime:

A motor launch of approximately 20 gross tons, with the single hoist of the international code flag "H".

ANCHORAGE:

(a) 1st Anchorage: In front of Pier 3 in position, Lat. 10° 17.8′ N., Long. 123° 54.90′ E. Depth MLLW=4 fathoms.

(b) 2nd Anchorage: In front of William Lines Warehouse in position, Lat. 10° 18.0′ N., Long. 123° 55.25′ E. Depth MLLW=5 fathoms.

(c) 3rd Anchorage: In front of Aboitiz Terminal in position, Lat. 10° 18.2′ N., Long. 123° 55.5′ E. Depth MLLW=6 fathoms.

South Stream:

(a) 1st Anchorage: Opposite Ludo Wharf in position, Lat. 10° 16.88′ N., Long. 123° 53.43′ E. Depth MLLW=6 fathoms.

(b) 2nd Anchorage: N.E. of Cawit Island in position, Lat. 10° 16.54′ N., Long. 123° 53.33′ E. Depth MLLW=8 fathoms.

(c) 3rd Anchorage: Lat. 10° 16.17′ N., Long. 123° 53.28′ E. Depth MLLW=6 fathoms.

(d) Explosive Anchorage: South of Lipata Point, West of Lauis Ledge.

Anchorage Instructions:

(a) Only 3 vessels of 600 ft. overall length can anchor at the anchorage with a safety margin for dragging and swinging during bad weather with 4 shackles in the water recommended for safe anchorage.

(b) For each vessel of 600 ft. overall length with 4 shackles of anchor chain in the water, approximate turning circle radius is 960 ft.

RESTRICTIONS:

1. Foreign ships are not allowed to pass the North Channel, due to the bridge between Madaue and Opon. However, ships of 80 ft. vertical height from MLW and length of 300 ft. may pass with utmost care.

2. Draft limitation of 40 ft. for Cebu Channel while port established berthing spaces vary from 10 ft. up to 30 ft.

3. Ballast, oil are prohibited to be discharged within the Cebu Harbour and Philippine waters.

MAX. SIZE: See "Berthing".

HEALTH: Pratique obtained after Quarantine personnel have boarded, mustered crew and passengers, and examined ship's health documents. Pratique automatic if vessel coming from another Philippine port.

RADIO: Globe Mackay & Radio Corp. Call letters DZM. *(Other call letters and frequencies available).*

Working frequencies: 4328 kc/s., 6492 kc/s., 8656 kc/s., 12984 kc/s.

Listening frequencies: 425 kc/s. and 500 kc/s.; 6265.5–6258.5 kc/s.; 8354–8374 kc/s.; 12531–12561 kc/s.

Master may contact Cebu Stevedoring Company through Channel 1 (156.7 Mc/s.) and Channel 2 (157.8 Mc/s.) VHF.

TUGS: The Cebu Harbour Pilots Association has available tugs of varying h.p. When additional h.p. is required, Cebu Stevedoring Co. can provide tugboat with h.p. ranging from 350 to 690 h.p.

BERTHING: Berthing may be done at any time during the day or at night and Masters should exercise their own judgment in this respect. Vessels moor either port or starboard side to, depending on prevailing conditions.

Port of Cebu: Berthing of vessels engaged in foreign trade are limited to moor only at the following berthing areas.

(a) National Main Port:

Berth Number	*Length of Berthing space (m.)*	*Draft Limitation (ft.)*
7	193	30
8	258	18
Pier 1 South side	153.65	25
Pier 1 North side	153.65	25
Pier 2 South side	155.65	25
Pier 2 North side	155.65	25

(b) Ludo Private Port: Berthing of vessels engaged in foreign trade at Ludo Private Port are moored to concrete dolphins running N.E. or S.W. of the Ludo pier. Draft limitation: 40 ft.

Port Establishment of Mandaue: Berthing of vessels engaged in foreign trade are not allowed at Mandaue. Draft limitation: 12 ft.

Port Establishment of Madan: Berthing of vessels engaged in foreign trade are allowed at General Milling Corporation Private Wharf, and Shell Island Depot Private Wharf.

Port District	Draft Limitation (ft.)
General Milling Corp. Pvt. Wharf	25
Opon Municipal Port	15
Mobil Oil Depot	25
Caltex Oil Depot	25
Shell Island Depot	30

Cebu is a principal port of entry open to both foreign and domestic trade.

The port of Cebu was taken over by the PPA in April, 1977.

Other Ports of Entry under PMU-Cebu.

I. Mactan. Another port of entry, N.E. of the Port of Cebu City. Considered as an industrial port, it has jurisdiction over all of Mactan, Shell and Olango islands. Average ship call is 145 vessels (foreign and domestic) per month.

Other ports of entry under the jurisdiction of PPA–Mactan but owned by private entities are:

General Milling Corporation – A 275 m. private marginal wharf with an average depth of 12.20 m. Foreign vessels usually carry raw wheat materials for processing at GMC mills.

Mobil Oil Philippines – 97 m. long with an average depth of 9.90 m. Has total storage capacity of 424,162 bbls. Used exclusively by tankers.

Caltex – Shell – 156.34 m. long with total storage capacity of 273.750 bbls.

II. Tagbilaran. Situated at the S.W. portion of the island-province of Bohol, the Tagbilaran Port has a total area of about 10,393.48 sq.m. Average depth is 3.28 m.

Pilotage is compulsory which is handled by the Tagbilaran Harbour Pilots Association.

Philippine Sinter Corporation (PSC) Private Port: Situated in Garcia Hernandez, S.E. of Bohol and is 53 km. from Tagbilaran City.

III. Other private ports which also serve as Ports of Entry.

Atlas Consolidated Mining & Development Corporation (ACMDC). Under the jurisdiction of the PPA Subport of Toledo, this private port caters to ocean-going vessels which unload imported machinery and equipment, anhydrous ammonia, sulphuric acid among others. While those exported are copper concentrates and pyrite cinders.

Durano Private Port in Danao, Cebu.

APO Cement Corporation Private Port in Tina-an, Naga, Cebu.

BRIDGES: The Opon-Mandaue bridge crossing the North channel is completed and open to traffic. According to Cebu Pilots Association, clearance is 76 ft. at HW and 80 ft. at LW.

STEVEDORES: Ordered by Agents, no ETA to stevedores necessary from Master.

Cranes, forklifts, trucks, tugs, barges and lighters are used for cargo handling and are mostly owned by private contractors.

MEDICAL: No advance notice to Agents needed. Hospital facilities available anytime.

TANKERS: See "Berthing".

FRESH WATER: Most berths supply by shore installation, otherwise by barge or trucks.

FUEL: Fuel oil can be obtained by arrangement with the different oil installation on Mactan Island.

FIRE PRECAUTIONS: Tankers discharging: smoking only allowed in saloon (officers), crew in the messroom.

DEVELOPMENTS: Reclamation project at the North side of Cebu.

GANGWAY/DECK WATCHMEN: Services of watchmen necessary subject/Master's recommendation.

OPENING/CLOSING HATCHES: Stevedores, with aid of ship's crew.

CUSTOMS ALLOWANCE: (Tobacco) 1 carton a week for each crew member. (Wine and/or Spirits) 1 bottle a week for each crew member.

IDENTIFICATION CARDS: Required by Immigration Authorities.

CONSULS: Norwegian 9–77–20; Chinese 7–45–85; American 7–31–51.

REPAIRS: Minor repairs possible.

DRY DOCK: Cebu Shipyard – max. 1,000 d.w.t. only.

REPATRIATION: Facilities available.

AIRPORT: Distance 7 miles from port and regularly served by all domestic airlines.

TIME: Local time based on the 120 East meridian. GMT plus 8 hours.

HOLIDAYS: Cargo can be arranged during holidays, which are the following: New Year (January 1st); Maundy Thursday; Good Friday; Bataan Day (April 9th); Labour Day (May 1st); Independence Day (June 12th); Republic Day (July 4th); Bonifacio Day (November 30th); Christmas Day (December 25th); Rizal Day (December 30th).

DELAYS: Berthing on North side of piers depends upon tide and current. South side of piers, vessel can dock any time.

AUTHORITY: Philippine Ports Authority.

DADIANGAS (General Santos City): 06.06 N. 125.09 E.

DOCUMENTS:

4 Crew Lists.
3 Stores Lists.
3 Crew Personal Manifests.
Last Clearance.
Ship's Register, etc.

Immigration:

1 Visaed Philippine Crew List (and 1 copy).

Port Health:

Deratisation or Exemption Certificate.
International Health Form.
1 List of Vaccination Certificates – must be valid.
1 Crew List.

Department of Agriculture:

Certificate stating vessel free from Kaphra beetle.

PILOTAGE: Pilotage compulsory. Pilot boards about 0.5 miles from the berth. Uses a white painted launch as a rule. If berth occupied, Pilot takes vessel to anchorage off the town.

ANCHORAGE: Very deep water. Vessel lowers 7 or 8 shackles on the port anchor as vessel approaches shoreline. Anchor then takes hold on reef. This is about 200 ft. from shore, when vessel has swung stern-to.

RADIO: Messages regarding ETA, etc. are sent through Manila Agent.

TUGS: Not available.

BERTHING:

Government Marginal Wharf:

Length 215 m. concrete.
Width 9 m.
Depth 23 m.

Private Piers:

	Length (m.)	Width (m.)	Depth (m.)
Dole Philippines	145	18	11.5
General Milling Corp.	38	9	12.6

REPATRIATION: Possible, but very difficult via Manila.

AIRPORT: Wharf is approximately 7 km. from airport with Monday, Wednesday, Friday and Sunday flights to Manila.

MEDICAL: Small hospital in town.

STEVEDORES: 1 company only. Ship's gear used and a loading rate of about 1,500 tons per day. Exports are: fresh fruit, canned pineapple and concentrated pineapple juice.

CUSTOMS ALLOWANCE: 200 cigarettes and 1 bottle of spirits per man.

SHORE LEAVE: Allowed.

FUEL: None available.

DEVELOPMENTS: Rehabilitation of the existing wharf and extension of 300 m. including reclamation area completed 1977.

GENERAL: 1 Customs Inspector and 2 guards to be given accommodation and meals. When a vessel is expected, the Agent usually contacts VHF Channel 16 from a vessel alongside.

AUTHORITY: Philippine Ports Authority, General Santos City.

DAVAO: 07.04 N. 125.38 E. (See Plan Book)

See "General" before first port.

PORT LIMITS: Normally referred to as the "Davao Harbour", it embraces all that portion of Davao Gulf bounded by an imaginary line drawn from Dumalag Point (7° 1.5′ N. and 125° 34.25′ E.) running East (true) to the Western shoreline of Samal Island, thence by the shoreline of Samal Island to Bassa Point (7° 12′ N. and 125° 42.25′ E.); thence by an imaginary line running straight to Gill Point (7° 15.25′ N. and 125° 50.17′ E.) and thence by the shoreline of the mainland (Mindanao Island) to Dumalag Point, the place of commencement.

DOCUMENTS: Required on entry

The Philippine Ports Authority (PPA):

2 Inward Foreign Manifest
1 Cargo Stowage Plan and Hatch List
1 Passenger List
1 Crew Declaration List

The Bureau of Customs (BOC):

7 Inward Foreign Manifest
5 Cargo Stowage Plan and Hatch List
5 Stores List
5 Bonded Stores List
5 Firearms and Ammunitions List
5 Drugs and Narcotics List
5 Passenger List
5 Crew Declaration List
Clearance from last port of call.

PILOTAGE: Pilotage is compulsory for all vessels of foreign registry of 100 gross tons and over.

The Davao Pilotage District covers all ports and harbours beginning from Malalag, Davao del Sur along the coastline Northward and turns up to Baganga Bay in Davao Oriental facing the open Pacific.

All vessels entering the Davao Harbour pass through the Northwestern part of Davao Gulf sheltered by the Western coastline of Samal Island and the Davao Mainland.

An approaching vessel is easily sighted at this part of the gulf from Sta. Ana Pier (7° 4.60′ N. and 125° 35.5′ E.) where the Pilot station is located. Pilot's boarding position is at 7° 2.0′ N. and 125° 39.0′ E., a point approximately 3 miles before the designated Anchorage Areas Nos. 1 and 2.

From the anchorage area, vessels docking/anchoring at the following ports and anchorage loading points within the harbour limits navigate through Pakiputan Strait following the designated fairway.

Public berth: Sasa Wharf.

Private berth: Legaspi Oil Co. (LEGOIL) Wharf; TEFASCO Wharf; TADECO Wharf; Hijo Plantation, Inc. (HPI) Wharf; MCP Wharf; NIDC Wharf; Shell Jetty; Mobil Jetty; Caltex Jetty.

Wharves & Piers Within Davao Pilotage District:

Names	Location	Controlling Draft	Length Overall	Approx. Heading	MLLW Elevation (sea level)	Remarks
Caltex Jetty	Pakiputan Strait	23 ft. 00 in.		030°/210°		Private owned/oil berth
Mobil Jetty	,,	32 ft. 00 in.		041°/221°		Private owned/oil berth
Legaspi Oil Wharf	,,	32 ft. 07 in.	640 ft.	042°/222°	14 ft.	Private owned/coco oil, copra & general cargo
NIDC Wharf	,,	28 ft. 00 in.	99 m.	032°/212°	10.5 ft.	Private owned/coco oil, copra & banana berth
Shell Jetty	''	34 ft. 00 in.		032°/212°		Private owned/oil berth
Sasa Wharf	South 32	24 ft. centre	515 m.	007°/187°	12 ft.	Gov't Wharf/Gen. Cargo
Sta. Ana Pier	Sta. Ana	12 ft. inner end	220 ft.	270°	10 ft.	Gov't. Pier/Gen. Cargo
BCI Conveyor Berth	Ilang	30 ft.				Private/cement berth
MCP Wharf	Ilang	S-32 ft. N-27 ft.	280 ft.	347°/167°	15 ft.	Private & Gen. Cargoes
Panabo (Tadeco Wharf)	Biawa	35 ft.	386 ft. 94 ft. (410)	050°/230°	14 ft.	Private/banana berth
Madaum (Hijo) Wharf	Hijo	31.5 ft fwd	308.3 ft.	318°	14 ft.	Private/banana berth, molasses & gen. cargo
Malalag Wharf	Malalag	17 ft.	105 ft.	N/S	8 ft.	Government Wharf
Mati Wharf	Mati	24 ft.				Government Wharf
TEFASCO						

Working Anchorages: Maco Anchorage; Mabini Anchorage; Tambongon Anchorage; Bunawan Anchorage; Tibungco Anchorage.

A total of six launches are regularly used by the Harbour Pilots distinctively painted red and white with a number preceded by "P" at their bows and fly a small Philippine flag and a red and white flag. Three Pilots are posted to attend to all pilotage needs of vessels on an 8-hour shift schedule for 24 hours. The Pilot launches are stationed at Sta. Ana Pier, Sasa Wharf and HPI Wharf.

ETA Notices: The Master of the vessel sends a radio message to the ship's Agent in Manila through the Coastal Radio Station (DSZ) Manila, operated by the Association of International Shipping Lines containing the advance shipping information as follows: Name of vessel; port of destination and discharging/loading point (public or private wharf, at anchorage or at berth); ETA; LOA; estimated draft whilst alongside (in feet); nature and tonnage of cargo for discharging; special berthing or cargo handling gear/equipment requirement.

The Ship's Agent in Manila consequently relays this shipping information at the earliest possible time to the ship's Agent at the Port of Davao either by long distance telephone, telegram or telex. Where the vessel does not have a local Agent, necessary messages are sent to the harbour Pilot and government agencies directly involved and its supercargo from Manila normally comes a day ahead of the vessel.

No VHF facility is available to facilitate ship to shore communication link.

Benefitting from the shelter provided by Samal Island and the mainland that surround in considerable proximity, Davao Harbour has constantly been calm and all vessels can take Pilots at the aforementioned boarding area throughout the year.

The following signals are recognised by all Pilots:

To ask for a Pilot by day:
- The Pilot jack hoisted at the fore;
- The international code signals or P.T.

To ask for a Pilot by night:
- The pyrotechnic light, commonly known as blue light every 15 minutes;
- A bright white light, flashed or shown at short or frequent intervals just above the bulwark for about a minute at a time;
- The international code signal P.T. by flashing lights.

ANCHORAGE: The Davao Harbour is adequately provided with convenient and safe anchorages with widely rocky bottom. These are situated at both sides of the fairway with Anchorage No. 1 fronting Samal Island towards the East and Anchorage No. 2 to the West.

Vessels anchoring nearest the area in the Southern vicinity of Sta. Ana Pier (Anchorage No. 2) should do so at a point at least 1 mile from the shoreline within a 1 mile stretch along the shoreline beginning from Sta. Ana Pier. Anchoring at Anchorage No. 1 towards the Western shoreline of Samal Island should be done from a point moving South approximately 0.50 mile from its inner limit and 1 mile from the Western coastline of Samal Island.

RESTRICTIONS: Upon entering the harbour limits, especially at night-time there are no restrictions. Agents must give prior advice to the Port authority.

MAX. SIZE: Generally, length and breadth of any vessel does not pose a problem in entering the approaches of the Port of Davao, however, berthing in individual ports varies on the ports' facilities and characteristics as listed: See table above.

HEALTH: Ships will clear for quarantine upon arrival at the Port of Davao. Quarantine officials will normally board the vessel at anchorage area 2 miles South of Sta. Ana Pier. No pratique is issued to vessels entering after calling at another port in the same country.

RADIO: All messages from vessels to Agents can be sent via Apo Communication Service – HF frequency DXF and VHF-DXF-6. VHF radio communication facilities in port operation at the port not available. Generally, the Master of the vessel sends a radio message to the ship's Agent in Manila through the coastal Radio station (DSZ) Manila, operated by the Association of International Shipping Lines and the ship's Agent in Manila consequently relays this shipping information at the earliest possible time to the ship's Agent at the Port of Davao either by long distance telephone, telegram or telex.

TUGS: The use of tug for berthing and unberthing is required. Tugs are normally available from the Davao Pilots Association and the Luzon Stevedoring Corporation (LUSTEVECO). It is important for the Masters of vessels through their Agents to provide at least 24 hours notice of ETA to ensure availability of tug boats. Pilot's boarding position: Lat. 7° 02′ 00″ N.; Long. 125° 39′ 00″ E.

BERTHING: Berthing can be done with the aid of a Harbour Pilot anytime during the day or at night. Vessels moor either port or starboard to depending on the prevailing conditions and characteristics of the individual port facilities (see "Max. Size").

CRANES: Shore cranes are available to work at Sasa Wharf or at any private or government port within the vicinity, for example:

Lusteveco	1 unit 25 tons lifting capacity
Red Ball Express	1 unit 20 tons lifting capacity
Tefasco Wharf	1 unit 20 tons lifting capacity 1 unit 60 tons lifting capacity
Lorenzo Shipping (Sta. Ana Pier)	1 unit 25 tons lifting capacity

Heavy lift floating cranes are not available.

BULK CARGO FACILITIES: Bulk cargoes can be loaded/discharged at the following wharves: Sasa Wharf, Legaspi Oil Mill Wharf, Tefasco Wharf, MCP Wharf, Malalag Wharf, and BCI Wharf.

For details of port facilities see "Max. Size" Maximum loading/discharge rates – 10 to 12 tons per gang hour.

SPECIALISED CARGO-HANDLING FACILITIES: Port facilities servicing the banana industry – (1) HPI Wharf, Madaum, Davao del Norte; (2) TADECO Wharf, Panabo, Davao del Norte; (3) MCP Wharf, Ilang, Davao City; (4) NIDC Wharf, Sasa, Davao City.

Port facilities servicing copra/by-products and other agricultural products – (1) Legaspi Oil Wharf, Sasa, Davao City; (2) NIDC Wharf, Sasa, Davao City; (3) Sasa Government Wharf, Sasa, Davao City.

Port facilities handling containers using the vessels' cranes or booms (derricks) and if requested by the Agent using shore cranes – (1) Sasa Government Wharf, Sasa, Davao City; (2) TEFASCO Wharf, Ilang, Davao City.

Berth facilities handling chemical or LPG carriers – (1) Shell Jetty, Sasa, Davao City; (2) Mobil Jetty, Sasa, Davao City; (3) Caltex Jetty, Sasa, Davao City.

STEVEDORES: Agents of all vessels entering the Port of Davao should apply for berthing/anchorage permit 24 hours before ETA. Ship master should provide details of all cargoes carried on board.

Arrastre/Stevedoring Operators servicing the following ports/berths – (1) Sasa Government Wharf: Luzon Stevedoring Corp. (Stevedoring – Foreign); Davao Veterans Arrastre and Port Services, Inc. (Arrastre-Stevedoring – Foreign); Tri-Port Services (Stevedoring – Foreign); Filipinas Port Services, Inc. (Arrastre-Stevedoring – Domestic); (2) Sta. Ana Pier: Filipinas Port Services, Inc. (Arrastre-Stevedoring – Domestic); (3) MCP Wharf: Mindanao Terminal & Brokerage Services Corp. (MINTERBRO) – (Arrastre-Stevedoring – Foreign); (4) TADECO Wharf: MINTERBRO (Arrastre-Stevedoring – Foreign); (5) HPI Wharf: MINTERBRO (Stevedoring – Foreign); Madaum Arrastre Corp. (Arrastre – Foreign); (6) TEFASCO Wharf: TEFASCO Arrastre-Stevedoring – (Foreign and Domestic); (7) LEGASPI Oil Wharf: Loblercan Arrastre-Stevedoring Services – (Foreign and Domestic).

MEDICAL: Five hospitals available.

TANKERS: Shell Jetty – 2 hoses of 6 and 10 in. in diameter; Mobil Jetty – two hoses of 8 in. in diameter; and Caltex Jetty – 2 hoses of 6 and 8 in. in diameter. These jetties can accommodate tankers with 100,000 d.w.t. Normally, all major oil companies in the Port of Davao receive their supply from Bataan and Batangas Refineries in Luzon, P.I. These companies have only depots for finished oil products ready for distribution to local dealers.

Capacities: Loading and discharging rates of finished oil products (fuel) at the minimum of 500 barrels/hour and maximum of 2,000 barrels/hour.
DENSITY: Average salinity – 1025.
FRESH WATER: Fresh water is available to all vessels entering the Port of Davao. It is delivered through truck-mounted water tanks alongside the quay or barge tankers to service vessels in the anchorage area.
FUEL: All grades are available except for bunkering at Mobil Jetty, while at Shell and Caltex Jetties all grades are also available with bunkering and other special fuel.
FIRE PRECAUTIONS: Normally, all oil companies compounds are off limits to unauthorised persons. Prior approval from the oil company management is needed before any vessel can dock at their jetties.
CONSULS:

Japanese Consulate	Tel: No. 7-37-81
Indonesian Consulate	Tel. No. 7-84-86
Chinese Consulate	Tel. No. 7-44-33

REPAIRS: Limited types of deck, all engine repairs and electrical services are available at Davao Shipyard Corporation and other machine shops in the vicinity.
DRYDOCKS: Largest 300 ft., width 30 ft., maximum 1,600 g.r.t. and 2 smaller docks.
SURVEYOR: Marine surveyor available – R. J. del Pan Mindanao Surveyors, Inc. representing Lloyds, A.B.S., N.K.K., Cargo and Marine Engineers, P&I Club, G.L. and Cargo Gear Bureau.
GANGWAY/DECK WATCHMEN: Service of watchmen is recommended. Minimum cost per watchman – Philippine P.4.50 per hour.
HATCHES: Normally, opening/closing of hatches is carried out by the stevedores.
CUSTOMS ALLOWANCES: Each crew member of foreign vessels calling at the Port of Davao is permitted to bring out supplies to be held out of bond if an article cost not more than P.10.00 (per article). Generally, sufficient amount for crew's consumption while in port.
CARGO GEAR: Ship's cargo handling equipment is usually used in loading and discharging. This gear must be in operative condition and in a state of readiness for use at a moment's notice. However, at least 24 hours before ETA, Agent's advice is needed when to use heavy lifts or shore cranes.
REPATRIATION: In order that proper arrangements can be made in case of repatriation, the Master should send message to ship's Agent 24 hours before ETA. Message should give the detailed names of crew to be repatriated and their destination. Available air/water transportation.
AIRPORT: Sasa Airport 3 km. from Sasa Government Wharf. It is served by regular airline (Philippine Air Lines); domestic flights only.
TIME: GMT plus 8 hours.
HOLIDAYS: New year's Day (Jan. 1st); Holy Thursday; Good Friday; Bataan Day (April 9th); Labour Day (May 1st); Independence Day (June 12th); Fil-American Friendship Day (July 4th); National Heroes Day (Nov. 30th); Christmas Day (Dec. 25th); Rizal Day (Dec. 30th). Special holidays declared by the President of the Philippines are also included. If any other legal holiday falls on Sunday, the following day is observed as a holiday. Cargo handling work can be easily arranged on any holiday with the shipping Agent.
POLICE/AMBULANCE/FIRE: Police Tel: No. 7-26-48; Ambulance Tel: No. 7-27-31; Fire Tel: No. 07.
SHORE LEAVE: Crew members are issued shore pass by the Bureau of Immigration Officers.
IDENTIFICATION CARD: Seaman's Book is sufficient.
SERVICES: Radio/Radar services; ship's laundries and chandling (food).
DEVELOPMENTS: Sasa Government Wharf – quay of 515 m. is being extended Northward for 405.16 m.; cementing of working area, and construction of 1 unit transit shed expected to be finished by end of 1979.
SHIPMASTER'S REPORT: September 1977.
Documents:

14 Copies	Inward Foreign Manifest
12 Copies	Crew List
8 Copies	Passenger List
8 Copies	Narcotic List
8 Copies	Personal Effects List
10 Copies	Store List
5 Copies	Vessel's General Information
8 Copies	Money List
8 Copies	List of Arms and Ammunition
8 Copies	Parcel List
1 Copy	Clearance from last port
2 Copies	Quarantine Declaration
8 Copies	Plant List
8 Copies	List of Animals

Note: Narcotic List, Money List, List of Ammunition and Arms, List of Plants and Animals may be on the same sheet.
Radio/VHF Communications:
APO Communications DXF and Marphil Radio. The Agents Maritime Company of Phil and Everett Steamship Company are equipped with VHF in their offices.
Berthing (for bananas):
1. Madaum Pier – Del Monte bananas (a new pier under construction)
2. Panabo Pier – Chiquita bananas
3. Bacnotan – Del Monte bananas
4. NIDC Pier – Dole bananas.

Berthing (for general cargo):
Max. draft North 24 ft. Centre 24 ft. and South 32 ft. max. length 555 m. A new pier for container vessel and general cargo under construction and expected to be ready in course of the next 12 months.
Medical/Hospital/Clinics: Davao Doctors' Hospital; San Pedro Hospital; Mt. Apo Hospital; Brokenshire Hospital; Davao Gen. Hospital (Government owned). All hospitals located in Davao City.
Identification Card: Not required.
Shore Leave: Curfew hour from 2400 (0000) up to 0400 hrs.
Repatriation: Expensive. Crew to be escorted by one Immigration Officer from Davao City to Manila and all expenses including overtime of Immigration Officer to be charged to Owner's account.
Holidays: New Year – Jan 1st; Bataan Day – April 19th; Labour Day – May 1st; Independence Day – June 12th; Fil-Am Day – July 4th; All Saints Day – Nov. 1st; Bonifacio Day – Nov. 30th; Christmas Day – Dec. 25th; Rizal Day – Dec. 30th.
Bunkers: Fuel, diesel and lube oils available but clearance takes a long time.
Shipchandler/Laundry: Available, prices reasonable.
Working Gangs for Painting Cleaning etc: Foreman: regular time – Peso 3.50/hour; overtime – Peso 5.25/hour. Ordinary workers: regular time – 2.90/hour; overtime – 4.35/hour.
Other charges: Meals. Foreman require 3 meals per day; ordinary require 2 meals per day. Transportation included in working hours.
Repairs of Ship's Instruments: Radar – any type; Radio – any type; Gyro – any type.
Ship Repairs: Minor.
Developments: At the Samal Island (North side) a large ship wharf is under construction.
Time: Standard time minus 8 hours on GMT (but 1977 was the first year with Summer time which commenced in March until September.)
AUTHORITY: Philippine Ports Authority, Port Management Unit (PMU), Davao City.

HONDAGUA, Luzon Island: 13.56 N. 122.14 E.

SHIPMASTER'S REPORT: 1974.
APPROACHES: B.A. Charts 3806 and 3475, neither of which are of very much assistance. There are no navigational marks by night, but the water is deep and we made a comfortable approach by Radar.
PILOTAGE: Minimum 12 hours notice required. Pilot boards at Siain, a village 10 miles West of Hondagua on the North coast of the mainland. Pilot boat is a small dug-out canoe fitted with outriggers and an outboard motor, and by day exhibits the pilot flag, and at night a single white light similar to a normal fishing canoe. Pilot shouts to attract attention when close to the vessel at night.
DOCUMENTS: Officials embark at Siain but not before 0630 hrs. due to curfew. Accommodation ladder required. All documents required as for first port of entry, excepting quarantine which is not performed twice.

10	Ships Store Lists.
8	Crew Personal Effects lists.
12	Crew Lists.
3	Health Declarations.
2	Visaed Crew Lists.
2	Plant Quarantine Lists.
2	Animal Lists.

Officials disembark again at Siain with the exception of the 3 Customs Officers, who remain on board and who require meals and accommodation.
TUGS: Not available.
BERTHING: One berth only, for grain discharge and for coastal tankers supplying fuel to the Mill. Berth lies East/West with approx. depth at L.W. East Dolphin 28 ft., Elevator about 34 ft. 6 in., and West Dolphin about 39 ft. The berth is thought not to be suitable for vessels exceeding 500 ft. L.O.A. The dolphins are of timber-pole construction, and the elevator is concrete. Arrival and departure from the berth is during daylight only. Mooring arrangement is 2 headropes to buoy, 2 breastropes to shore, spring-wire to bollard on elevator, 4 sternlines to concrete dolphin, and 1 spring-wire to bollard on elevator. An old landing-barge is used as a mooring boat, but this has only one engine on the port side and is not very manoeuvrable. A motorised dug-out canoe also assists, but is not powerful enough to pull a line very far. The elevator has two discharging suckers, but these are fixed and the vessel has to be shifted hatch to hatch. Combined capacity about 80 tons per hour which could be improved, but foundations of conveyor-belt system damaged by earthquakes.
FRESH WATER: Available at berth but not of very good quality. Ship's hoses required.
AIRPORT: None. There is a train service to Manila, about a six-hour journey.
CURFEW: Area is under Martial Law. Curfew from 2300 to 0600 hrs.

ILIGAN. Mindanao: 08.14 N. 124.14 E.

(See Plan Book)

PILOTAGE: Pilotage for docking and undocking at government and privately owned piers/wharves for foreign vessels is compulsory. For domestic vessels pilotage is necessary only when docking. The Harbour Pilot meets the vessel 1 to 2 miles NW of the pier. Vessels coming from foreign ports intending to dock at any of the private piers will first anchor at designated anchorage area for boarding formalities.

ANCHORAGES: Upon takeover by PPA in August 1977, anchorage areas were designated. Moreover, when private piers were turned over by the PPA in November 1977, some other anchorage areas were drawn to cope for the needs of foreign vessels. Anchorage areas are found at least 0.5 to 1 mile from beaches and wharves and the average depth varies from 37 m. to 56 m. The characteristics of the bottom near the beach is muddy. Beyond 0.5 mile is good holding ground of sand and gravel. In case of strong SW winds, vessels may resort to the natural protection of the mountains of Initao and Kiwalan.

RESTRICTIONS: See "Berthing".

MAX. SIZE: Max. LOA 150 m. Max. Draft 25 ft. and 15,000 d.w.t. at Pier No. 3 (For foreign-going vessels).

HEALTH: Vessels clear quarantine upon arrival from foreign port. Health Officer boards the vessel 2 miles off the pier at designated quarantine area.

TUGS: The Iligan Harbour Pilot's Association owns 2 tugs both serving the domestic and foreign vessels. The use of tug is necessary especially when docking and undocking foreign vessels on government and private piers. Additional tugs are also available if the Harbour Pilot thinks necessary. It is important that the Masters of vessels/shipping Agents notify the Harbour Pilot at least 48 hours in advance of vessels arrival to ensure the availability of tugs.

BERTHING: Berthing for domestic vessels may be done anytime of the day or night. Foreign-going vessels berth during daylight hours and undock at anytime.

	Length	*Width*	*Depth*
Pier No. 1 (Concrete)	96 m.	12 m.	4 m.
Pier No. 2 (Concrete)	96 m.	12 m.	3 m.
Pier No. 3 (Concrete)	240 m.	15 m.	6.5 m.

STEVEDORES: Domestic and foreign-going vessels proceeding to Iligan should cable their Agents or representatives as to their ETAs, at least 24 hours prior to arrival in order that the stevedoring company may assign sufficient number of gangs to the vessel. Later, if the ETA is revised, shipping Agent should immediately notify the arrastre and stevedoring firm of change. The arrastre and stevedoring firm that controls the government pier in Iligan is handled by the Iligan Merged Arrastre and Stevedoring Corporation (IMASCO).

FRESH WATER: Fresh water is available to vessels loading or unloading at Pier No. 1 and 3 which is equipped with connection direct from the City Waterworks.

FUEL: Bunkers are available provided prior notice is given through the ship's Agent.

INDENTIFICATION CARDS: Not required.

CONSULS: In Manila.

REPATRIATION: Local Immigration takes care of any repatriation or disembarkation provided advance notice and they are given names and destination of each Crew member.

AIRPORT: Baloi Airport 15 km. Cagayan de Oro Airport 110 km.

TIME: GMT plus 8 hours.

HOLIDAYS: New Year's Day (January 1st); Holy Thursday and Good Friday (movable); Labour Day (May 1st); Independence Day (June 12th); RP-US Friendship Day (July 4th); Thanksgiving Day (September 21st); Christmas Day (December 25th); Rizal Day (December 30th); Special holidays declared by the Prime Minister of the Philippines are also included. Legal holidays which fall on Sundays are observed the following day. Cargo work can be arranged on any or all holidays with the vessel's Agent.

POLICE/AMBULANCE/FIRE: Police Tel. 101. City Hospital Tel. 20593. Fire Dept. Tel. 103

GENERAL: It is necessary during berthing and unberthing that the ship's engines, tackle and all other gear be in an operating condition and in a state of readiness for use at the moment's notice as required.

TELEPHONES: Placing of telephones on board foreign vessels is not available at present except offices located inside the port zone.

SHIPMASTER'S REPORT: 1974

Approaches: B.A. Chart 3426. This is of not very much use as an approach chart as the scale is too small. However, the water is deep and therefore it does not matter too much. On this voyage we made an approach in darkness and solely on Radar. The only navigational light, a fixed red, being very hard to distinguish.

Pilotage: The Pilot boards about 1 mile N.W. of the piers. Pilot boat is a river-type launch about 50 ft. in length with a grey hull and a white funnel.

Anchorage: 2 cables from old-harbour piers. 7 shackles in 50 fathoms.

Radio: No VHF facilities.

Officials: Iligan is a Port of Entry. Officials board at the anchorage. Accommodation ladder required. Usual procedures take about 1 to 1 hour 30 minutes.

Documents:

20 Ship's Stores Lists.
14 Crew Personal Declarations.
3 Vaccination, and inoculation dates.
3 Ports of Call and dates for previous 3 months.

Immigration: Before leaving last foreign port for the Philippines, obtain 4 official Crew List Forms from the Philippine Consul. Complete these forms and have them visaed by the Consul who will retain 2, and return 2 to the ship. Passes are required for crew members going ashore.

Customs Allowance: 1 bottle and 200 cigarettes per person. 3 Customs officers live on board all the time, and require accommodation and meals.

Tugs: Up to 4 tugs available if required, but it is advisable to give notice of requirements well in advance, since these tugs may be engaged in towing barges elsewhere around the island.

Berthing: Quinalang Cove: 1 grain discharge berth. Depth at berth 40 ft. and ample room for a vessel of 600 ft. L.O.A. Discharge is by sucker direct to the Silo. There are 2 suckers with a combined average discharge rate of 100 t.p.h., but suckers are located in fixed positions requiring the vessel to be shifted hatch to hatch. Berth is well-fendered, with a shore gangway. Stevedores supply a good hatch-tent for working in the rain. 1 bulk-copra loading berth, 600 ft. in length and draft said to be 32 ft. 1 bulk-cement loading berth, reported to be capable of accommodating vessels of 25,000 g.r.t.

Camp Overton: Located South of Iligan, there is reported to be a steel-loading berth to accommodate vessels of 750 ft. length, and 36 ft. draft.

Fresh Water: Available at most berths.

Shore Leave: Crew members should take special care when proceeding ashore, and should not carry cameras or wear wristwatches etc. It is advisable to return aboard before darkness.

Airport: About 20 miles distant. Daily flights to Cebu and Manila.

Stores: Fresh fruit available, also good supply of seafood.

Repairs: Only very minor repairs can be undertaken.

Time: GMT plus 8 hours.

SHIPMASTER'S REPORT: September 1976.

Coconut Oil Berth: Located at "Quinalong Cove" Lat. 08.17 N. 124.15 E. Least depth of water in channel from sea to berth – 40 fathoms. Mean tidal range 5 ft. Density 1025. Nature of bottom at berth – mud. Vessels can berth in daylight only, unberthing anytime.

Anchorage: 3 cables S.W. of City Pier. Depth at L.W. 70 fathoms, cable should be "walked out".

Vessels hoses used, length of shoreline 300 m., size 12 in. No shore booster pumps used. Products handled, coconut oil and coconut products.

Pilotage: Compulsory. Pilot requires 24 hours notice and boards 1 mile N.W. of City Pier.

Max. size of vessel that can enter the port of Iligan is 100,000 d.w.t. and draft 45 ft. Keel clearance required, about 2 ft.

5 small and medium size tugs available.

Nearest consuls are in Manila.

Facilities available: Fresh water, 5 t.p.h. Fresh provisions. Laundry.

No slop tanks, surveyor, repair facilities, fuel.

Documents:

2 Visaed Crew Lists (Philippine) from previous port. If diverted at sea, a copy of the diversionary cable required.

6 Ordinary Crew Lists
6 Personnel Effects Lists
6 Store Manifests
6 Parcel Lists
6 Arms Lists
6 Mail Lists
6 Narcotics Lists
6 Animal Lists
6 Plant Lists
6 Cargo Manifests
6 Transit Manifests
6 List of Ports
6 Currency Lists

There is a cabin search by 4 Customs Officers, accompanied by 2 Ship's Officers. They collected an undeclared radio and two cameras. They did not impose any fine, as they said they had been courteously treated, and this was the vessel's first visit.

3 Customs Officers remain aboard, and have to be fed.

SHIPMASTER'S REPORT: June, 1978.

To avoid having to anchor in very deep and unsafe places organise the arrival time for daylight.

The wharf's construction has been completed though the depths alongside do not facilitate the berthing of large ships. Near the centre of the wharf is a patch of 15 ft. (see sketch).

An anchor is lowered to 1 shackle in the water and after dropping slacked away when necessary. This is to facilitate unmooring. A small tug assists. No. V and VI hatches overhung the quay.

AUTHORITY: Philippine Ports Authority.

ILOILO, Panay: 10.41 N. 122.35 E. **(See Plan Book)**

See "General" before first port.

PORT LIMITS: Also see "Anchorage" – last paragraph. Iloilo Harbour is defined as that portion of Iloilo Strait within the following boundaries: an imaginary line extending from the Northern bank of Dumangas River, Island of Panay, across Iloilo Strait to Navalas Point on the Northern coast of Guimaras Island; thence along the N.W. and West shore of Guimaras Island to Luzaran Point thence along an imaginary line extending from Luzaran Point to the South bank at the mouth of Siuaragan River in the municipality of San Joaquin, Province of Iloilo, Island of Panay. Thence along the Southern shore line of the Island of Panay to the North bank of Dumangas River, the point of commencement.

DOCUMENTS:

Bureau of Customs:

1. On Arrival:
    - 7 Inward Foreign Manifests
    - 3 Crew Lists
    - 3 Personal Effect Lists
    - 3 Store Lists
    - 3 Arms and Ammunition Lists
    - 3 Narcotics Lists
    - 3 Mail Lists
    - 3 Bonded Stores Lists
    - 3 Passenger Lists
    - 3 Storage Plan (if vessel has cargoes to be discharged)
    - 2 Bills of Lading
    - 1 Clearance from last port of call.
2. On Departure:
    - 4 Statistical Supplement (for vessels leaving directly for a foreign port).
    - 7 Outward Foreign Manifests.

Philippine Ports Authority:

1. On Arrival.
    - 2 Inward Foreign Manifests
    - 2 Passenger Lists.
2. On Departure:
    - 2 Outward Foreign Manifests.

PILOTAGE:

1. Application (notice) for pilotage services is usually made by a shipping Agent at least 24 hours before the vessel's arrival. Notice may also be tendered via a commercial telegraph office addressed to Iloilo Harbour Pilot Association, Muelle Loney St., Iloilo City. the Pilot Association does not own any VHF radio.

2. The Pilot Association owns 5 standard-designed pilot boats, with one being utilized as water taxi for vessel's crew intending to go on shore leave.

3. Request for pilotage services may be done in either of the following ways:
   (a) 2 long and 1 short blast of the vessel's whistle.
   (b) Continuous flashing of blue light during night time.
   (c) Display of the international "G" flag during daytime.

4. There are 2 Pilot stations where the Pilot may be taken aboard, namely:
   (a) Sinapsapan Point at the South entrance, 8 miles from the port.
   (b) Nabalas Point at the North entrance, 12 miles from the port.

5. With respect to the boarding and safety measures, the Pilot requires a sturdy and reliable pilot ladder.

ANCHORAGE: (proposed)

The anchorage of the Port of Iloilo is that portion of Iloilo Strait within the following boundaries: an imaginary line extending from Balabago Point, Island of Panay across Iloilo Strait up to Cabugao Point on the Northern Coast of the Island of Guimaras, thence along Northwest and West Shore of Guimaras Island to Bondulan Point; thence along Southern shore line of the island of Panay to Balabago Point, the Point of commencement.

Note: A vessel is considered "arrived" after it drops anchor at any point within the boundaries described above.

RESTRICTIONS: Generally, a vessel may enter the port from the Pilot station at any time of the day or night. However, said entrance of the vessel is restricted by the draft of the vessel and the tide at the time of entrance. At MLLW, only vessels with a maximum draft of 28 ft. may enter or depart from the port. At high water (5 ft.) vessels with a maximum draft of 33 ft. may enter or depart from the port.

MAX. SIZE: Foreign pier has a total length of 345 m., berth 2 (100 m.) has a controlling draft of 33 ft. alongside at MLLW.

HEALTH: The port has 1 Quarantine Doctor. Quarantine formalities are done while vessel is at the Quarantine Station. Notice for quarantine formalities is usually given by the shipping Agent 24 hours before the vessel's arrival.

The following documents are necessary for presentation to the Quarantine Officer on arrival.

A. On arrival:
   1. Deratting Exemption Certificate. (If expired or about to expire, the same could be renewed at the port for a period of 6 months).
   2. International Certificate of Vaccination. (If expired or about to expire, vessel crew could be vaccinated locally).
   3. Maritime Declaration of Health. (Form to accomplish available locally).

Above documents are necessary for the issuance of Free Pratique.

B. On departure:
   1. Quarantine Clearance for Outgoing Vessels. (A fee of P4.00 or approximately $0.53).

Free pratique is issued at the first port of call. It becomes automatic if the vessel intends to call at another port within the Philippines.

RADIO: Coastal Marine Radio Station:

Location: 10° 41.4′ N. 122° 32.8′ E.
Call Sign: DYV
Frequencies: 8632 kHz. 0000 GMT – 0400 GMT
0600 GMT – 0900 GMT
12948 kHz. 0900 GMT – 1130 GMT
VHF Channel 16

Also private telegraph companies with international relaying stations; Central Radio Communications, Radio Communications of the Philippines., Inc.

VHF: Vistranco has a VHF radio, but is out of order and being repaired (1978) . Frequency: Channel 1 – 156.8 megahertz, Channel 2 – 156.65 megahertz.

TUGS: Tugboats usually join vessels for docking and undocking operation. The services may be provided by the pilot's boat or tugboats of the Visayan Stevedoring & Transportation Corp. The charge is P150.00/tug during daytime and P180.00/tug during nighttime.

BERTHING: Also see "Shipmasters Report".

The port has a foreign pier near the mouth of Iloilo River. It has a length of 300 m. divided into 3 berths of 100 m. each. The maximum draft alongside the pier at MLL is 28 ft. However, a vessel may be loaded up to the draft of 31 ft. (at MLL) with the use of a mule barge.

Usually, loading and discharging are done with the use of the vessels own gear, except catch-all nets and crane for heavy lift cargoes which may be provided by the Stevedore operator.

The arrestre operator is capable of handling general and heavy lift cargoes, cargoes in bags (like sugar, fertilizers, cements, copra cake, etc.). Bulk loading may be done also by "bleeding" cargoes in bags directly into the vessel's hold.

CRANES: 1 crawler crane with 15-ton capacity owned by private arrestre. The Ministry of Public Highways has 4 heavy-lift cranes of 25 tons capacity.

BULK CARGO FACILITIES: Within the harbour limit of the port is sugar bulk-loading installation situated at Jordan, Guimaras Island. The berth is capable of accommodating a vessel with a LOA of 182 m. and a draft of 35 ft. at MLL.

Loading is done with the use of a mechanical conveyor which has a rated capacity of 400-500 metric tons per hour. The discharging gear has a maximum height of 30 ft. above HWL.

Cargo handled in this berth is exclusively sugar in bulk.

SPECIALIZED CARGO-HANDLING FACILITIES: the port is *not* specially equipped for handling containers or roll-on/roll-off traffic.

LPG facilities at Petron.

STEVEDORES: An advice of 24 hours before the vessel's ETA is required to prepare the gangs necessary to perform stevedoring services. Stevedoring services can average at the rate of 900 – 1,000 metric tons of loading/unloading per 24 hours.

MEDICAL: The port itself does not own any medical facilities. However, within the City itself are 6 modern hospitals which could be used by the vessel's sick crew. Vaccinations and innoculations may be done by the Quarantine doctor who also issues corresponding certificates for the same.

TANKERS: Bunker is handled through 6-inch pipe-lines; however, Petron load bunker through a 4-inch pipe. "White oil products" are handled through 8-inch pipes. There are 2 privately owned oil-water separators.

Types of oil available: premium, regular, automotive diesel fuel oil, kerosene, and bunker C; rate of delivery: 10–12 t.p.h.

FRESH WATER: Fresh water can be supplied by a private supplier, Springwater Marine Services, Iloilo City. Water is supplied to the vessel while at anchorage or at berth from a water barge at the rate of 15–20 M.T./hour. cost is P16.00 ($2.13) per metric ton. Water is safe and potable.

FUEL: Bunker fuel and fuel oil (of any desired viscosity) are available and can be supplied by Philippine Shell Petroleum Corp., Lapuz, Iloilo City. It can be delivered either by barge or by road tanker at the rate of 10–12 t.p.h. An advance notice of 24 hours prior to delivery is necessary.

CONSULS: British, at Hongkong and Shanghai Bank.

REPAIRS/SERVICES: The Iloilo Dock and Engineering Company offers the following major services: marine construction and repairs, conversion, machine shop, electronics' navigational equipment installation and repairs, steel fabrication, sandblasting, engineering and project consultation. Other services offered: marine salvage, stevedoring and longshoring, lighterage, towing-harbour, inter-island and ocean warehousing and in-transit handling.

Radar:

Repair of ships radar may be done by Louman & Sons Technical Service Inc. The company is capable of repairing radar, radio transmitter and receiver, fathometer and steering system. Usually contacted by the ship's Agent.

DRYDOCKS: Largest drydock at Ideco is Shipway 1: Length 587 ft., width 56 ft. depth (draft at MLLW, 10 ft. without keel blocks, capacity 2,500 L.T. there are 4 other smaller docks, and several side berths.

SURVEYORS: Local Marine Surveyor, Delpan.

WATCHMEN: Watchmen are optional, however if the Master so desires, watchmen can be hired.

HATCHES: Opening/closing of vessels hatches and securing the vessel's derricks, are usually done by the stevedores.

CARGO GEAR: Load/discharge is effected by ship's gear; as of October, 1978, there is no special cargo equipment except for heavy lift cranes.

CUSTOMS ALLOWANCES: Vessels crew are permitted an individual allowance of 1 bottle of whisky and 1 carton of cigarettes per week. However, if necessary, the Master may request the Collector of Customs through the Customs Inspector on board for a further issue within the week.

REPATRIATION: Crew changes and repatriation may be effected by the local Regional Office of the Immigration Commission with the approval of its head office in Manila.

AIRPORT: An all-weather airport situated about 7 kms. from the pier. Regular Iloilo – Manila flight is 3 times a day. Other flights Iloilo – Cebu, Iloilo – Davao.

TIME: GMT plus 8 hours.

HOLIDAYS: *Legal Holidays:* Sundays, January 1st, (New Year's Day); April 9th, (Bataan Day); May 1st, (Labour Day); June 12th, (Independence Day); July 4th, (Phil.-American Friendship Day); November 30th, (National Heroes Day); December 25th, (Christmas Day); December 30th, (Rizal Day).

Note:

1. Special Public Holiday may be issued by the Prime Minister.
2. Under Philippine Law, if a legal holiday falls on Sunday, the following day (Monday) is also a holiday.

Regular working days in the Philippines are Monday through to Friday. Holidays notwithstanding, the Master/Agent may request continuance of stevedoring work after proper notice has been made with the stevedoring company.

POLICE/AMBULANCE/FIRE: Police Tel. 7-55-21; Fire Tel. 7-30-11; 7-49-89; Ambulance Tel. 7-25-61; 7-24-41.

TELEPHONES:

PLDT (Tel Co.) can install a telephone on board a vessel at berth with the following charges:

P200.00	Deposit for the instrument, refundable upon return of the instrument.
74.41	rate/month
45.00	for services
3.00	electrician's fee
322.41	Total charges

SERVICES: See "Repairs".

SHORE LEAVE: Shore leave is granted after the issue of shore passes by the local official of the Commission on Immigration.

IDENTIFICATION CARDS: Identification card is not necessary for the issue of shore passes. Visaed crew list will suffice.

DELAYS: Occasional congestion of the port may delay vessels berthing. Bunkering may be done whether the vessel is at anchorage or at berth.

DEVELOPMENTS: The mouth of the Iloilo River is scheduled to be dredged to an average depth of 9.15 m. As of September, 1978, it has been dredged to an average depth of 6.5 m. at MLLW level. The foreign pier is likewise scheduled to be dredged to an average depth of 9.15 m. As of September, 1978, berth No. 2 at the foreign pier (100 m. long) has a controlling draft of 10 m. at MLLW level. Total completion of work expected in middle of 1979.

GENERAL: Vessel's ETA has to be relayed to Philippines Ports Authority, Iloilo at least 24 hours before arrival.

SHIPMASTER'S REPORT: 1977

There are 3 ports where bulk sugar loading facilities exist, Pulupandan, Iloilo and Batangas Bay. Ships first call at Pulupandan on Negros Island, approximate position Lat. 10° 31′ 30″ N., Long. 122° 47′ 36″ E. and load up to a draft (SW) of 29 ft. The rate of loading by using 1 trimmer is about 300–400 tonnes per hour. Pilotage is compulsory and the Pilot boards in a position (approx.) Lat. 10° 27′ 24″ N., Long. 122° 46′ 12″ E. After completion of port formalities, the vessel is berthed alongside the Bulk Sugar Installation with a stationary conveyor.

The vessel then proceeds to Iloilo for loading upto 32 ft. This vessel, which is 675 ft. in length, loaded bulk sugar in hatches 2, 4, 6, 7 and 8. It was possible to load in hatch No. 1 also. The loading is done from a fixed conveyor with 2 trimmers and the loading rate is between 400–500 tonnes per hour. Finally the vessel proceeds to Batangas Bay and after the usual formalities, goes alongside the Batangas Bay Terminals Inc. (BBTI) at Bolo – Bauan – Batangas, where there is no draft restriction. The loading rate is about 300–400 tonnes per hour. Loading is done from a fixed conveyor with one manually operated trimmer. Pilotage is compulsory and ships awaiting Pilots can anchor either at Santa Rita or Santa Clara (Batangas City) or Tabangas.

The main sugar crop is brought to Iloilo, known locally as Sugar City, because it is the main sugar exporting port, from Negros Island, where most of the sugar farms and factories are situated. The sugar for export at BBTI is brought from factories around Laguna Bay by trucks. The Stowage Factor for bulk sugar worked out to between 40–41.

AUTHORITY: Philippine Ports Authority, Iloilo City.

JOLO: (Jolo Island) 06.03 N. 121.00 E. (See Plan Book)

See "General" before first port.

DOCUMENTS: 4 copies each of Crew Lists; Passenger List; Import Cargo Manifest; Oath of Master and a copy of Vessel's Information Sheet.

PILOTAGE: Pilots are stationed at nearby Zamboanga City. Advice of ETA at least 3 days before is requested to facilitate arrangement of pilotage service.

ANCHORAGE: Anchorage areas are NW of Jolo Wharf and West of Caltex Depot.

MAX. SIZE: Main wharf; Draft 4 m. LOA: 60 m. At Caltex, Mobil and Petron Oil depot: LOA: No limit; Draft: 6 m.

HEALTH: Ships will be cleared by quarantine officers upon arrival at anchorage.

RADIO: Local Port Authority is equipped with SSB radio linking all Port Authorities nationwide. Ships may send message through Radio Communications of the Philippines, Inc. which has international connections.

BERTHING: Berthing space at main wharf is reserved for large foreign vessels; Max. permissible draft at MLLW is 4 m. (SW); Cargo handling by ship's own gear; Cargo may be worked at open storage and direct delivery only.

STEVEDORES: 24 hours advice before ETA is required. Stevedores provided by Sulu Dockhandlers and Forwarders, Inc.

MEDICAL: 2 hospitals are available.

TANKERS: The private wharf of Sulu Agro Industrial Corporation within the port limit is due for completion in late 1979. It is designed to handle Crude coco oil.

FRESH WATER: Supplied by Sulu Water Works Authority with 4 in. piping all along the main wharf.

FUEL: Supplied by Petron Philippines, Inc.

FIRE PRECAUTIONS: Dangerous cargoes are worked at assigned berthing area.

CONSULS: In Manila.

REPAIRS: Minor repairs maybe undertaken by and within the vessel itself after permission is sought and granted by the Port Authority.

GANGWAY/DECK WATCHMEN: Customs Guard and Customs Inspector are on routine and continuous guard.

HATCHES: May be opened by stevedores.

CUSTOMS ALLOWANCES: Minimum quantity for personal use permissible only on board.

TIME: GMT plus 8 hours.

AIRPORT: Jolo Airport, flights to Zamboanga only, 2 flights a day.

HOLIDAYS: Cargoes are worked on holidays.

POLICE/AMBULANCE/FIRE: Central telephone system connects port Authority with Police, Ambulance and Fire Departments.

SHORE LEAVE: Curfew hour is from 2200 to 0400 hours. Crew members are allowed ashore. Identification cards not necessary.

REGULATIONS: No discharge of ballast oil in any territorial waters of the Philippines.

DELAYS: Delays in cargo handling: Rain.

DEVELOPMENT: Private wharf of Sulu Agro Industrial Development Corporation at Southwestern end of Port Limit is due for completion in late 1979.

AUTHORITY: Port Manager, Philippine Ports Authority, Port of Jolo, Sulu.

JOSE PANGANIBAN, Luzon: 14.18 N. 122.40 E. (See Plan Book)

See "General" before first port.

DOCUMENTS:

Inward Coasting Manifest.
Hatch Plan or Stowage Plan.
Vessel's Information Card.

PILOTAGE: Pilotage is compulsory. ETA advise should be sent to the Harbour Pilot Association, Legazpi City at least 36 hours before vessel's arrival. The vessel is met by the Harbour Pilot about 2 km. from the wharf aboard a boat displaying a pilot flag.

ANCHORAGE: Within Tanay Strait but not less than 500 m. from existing wharf.

RESTRICTIONS: Present port facilities could only allow vessels at anchorage considering the draft limitation and length of the pier.

MAX. SIZE: LOA – 230 m. Draft – 30 ft.

HEALTH: Vessels clear quarantine on arrival at Jose Panganiban Harbour. Quarantine Officers will normally board the vessel 2 km. from the wharf.

BERTHING: Present port facilities have been damaged by typhoon. Only 75 m. of the wharf is usable for berthing purposes. Length of quay – 75 m. width – 12 m. Max. depth of water – 30 ft. Quay height above sea level – 2 m. at high tide and 5 m. at low tide. Average rate of loading/discharging – 18 tons per gang hour. Storage area – 1.15 hectares.

CRANES: The port is not provided with shore cranes. Each vessel calling at the port is required to use her own gear.

STEVEDORES: Bicol Port Services.

MEDICAL: 1 government hospital located in the town about 3 km. from the wharf.

FRESH WATER: Can be provided by means of lorries and pipelines.

FUEL: All grades except premium gasoline obtainable from major oil depots and supplied by lorries alongside.

GANGWAY/DECK WATCHMEN: Available but not compulsory or necessary.

HATCHES: Opening and closing of hatches are part of stevedores work or at the Master's option.

REPATRIATION: All facilities available for crew changes; good land and air connections.

AIRPORT: At the capital town of Daet, Camarines Norte.

TIME: GMT plus 8 hours.

HOLIDAYS: New Years Day (Jan. 1st); Holy Thursday; Good Friday; Labour Day (May 1st); Independence Day (June 12th); P.I.U.S. Friendship Day (July 4th); Bonifacio Day (Nov. 30th); Special holidays declared by the Prime Minister of the Republic of the Philippines are also included. If any other legal holiday falls on a Sunday the following day is observed as a holiday. Cargo work can be arranged on any or all holidays with the vessel's agent.

SHORE LEAVE: Crews are allowed ashore in company of an Immigration Agent.
DEVELOPMENTS: Repairing of damaged wharf and water pipe-lines.
GENERAL: Vessels intending to call at Jose Panganiban shall apply for a berth space at least 24 hours before arrival. No dirty ballast may be dumped into the territorial waters of the Philippines. Rat guards shall be placed on all mooring lines. Berth allocation is on a first-come-first-served basis.
AUTHORITY: The Supervising Officer, Philippine Ports Authority.

LEGAZPI: 13.10 N. 123.45 E. (See Plan Book)

See "General" before first port.
DOCUMENTS:
Inward Coasting Manifest.
Hatch Plan or Stowage Plan.
Vessel's Information Card.
PILOTAGE: Pilotage is compulsory. ETA advise should be sent to the Harbour Pilot Association, Legazpi City at least 24 hours before vessel's arrival. The vessel is met by the harbour pilot about 2 km. Northeast of the wharf aboard a boat displaying a pilot flag.
ANCHORAGE: Within the Albay Gulf outside the imaginary line within the vicinity of Legazpi Port from San Roque Lighthouse to the East breakwater with depths varying from 80 ft. to 100 ft. with good holding grounds. The bottom is generally of sand and coral.
RESTRICTION: Present port facilities allow for 1 vessel at a time considering the draft limitation and length of the pier.
MAX. SIZE: Legazpi Port: LOA – 120 m.; Draft – 25 ft. Leg Oil Company: LOA – 230 m.; Draft – 35 ft.
HEALTH: Vessels clear quarantine on arrival at Legazpi Harbour. Quarantine officers will normally board the vessel 2 km. Northeast of the wharf.
RADIO: Following Stations are normally used:

RCPI	FILTEL
TELEFAST	CLAVECILLA
CRC	

TUGS: No tugs available. Motor launch is used to attend to mooring and unmooring.
BERTHING: Only the end of the wharf is usable by foreign vessels considering the draft limitation and constricted manouvring area. Legazpi Oil Company, Private Pier is, however, capable of accommodating vessels of any type and tonnage.
Legazpi Port: Length of quay 328 m. Width 30 m. Max. depth of water 30 ft. Quay height above sea level 2 m. at high tide and 5 m. at low tide. Average rate of loading/discharging 15.95 tons per gang hour.
Legazpi Oil Company, Private Pier: Length of quay 100 m. Width 10 m. Max. depth of water 60 ft. Quay height above sea level 3 m. at high tide and 6 m. at low tide. Average rate of loading/discharging 83.33 tons per gang hour. Facilities are suitable for handling of bulk copra, pellets, copra cakes and copra crude oil by conveyor and pipe-lines.
CRANES: The port has no shore cranes. Each vessel calling is required to use her own gear.
STEVEDORES: *Legazpi Port:* Provided by Legazpi Arrastre and Stevedoring Corporation (LASCORP) Tel. 2295.
Legazpi Oil Company, Private Pier: Provided by NORLEINCO Arrastre Services.
MEDICAL: 1 government hospital and 6 private hospitals available.
FRESH WATER: Can be provided by means of lorries.
FUEL: All grades obtainable from oil depots and supplied by lorries alongside.
GANGWAY/DECK WATCHMEN: Available but not compulsary or necessary.
HATCHES: Opening and closing of hatches are part of stevedores work or at the master's option.
REPATRIATION: All facilities available for crew changes; good land and air connections.
AIRPORT: 5 km. from port area. Flights to Manila twice a day.
TIME: GMT plus 8 hours.
HOLIDAYS: New Year's Day (January 1st); Holy Thursday; Good Friday; Labour Day (May 1st); Independence Day (June 12th); P.I.U.S. Friendship Day (July 4th); Bonifacio Day (November 30th); Special holidays declared by the Prime Minister of the Republic of the Philippines is also included. If any other legal holiday falls on a Sunday the following day is observed as a holiday. Cargo work can be arranged on any or all holidays with the vessel's agent.
POLICE/AMBULANCE/FIRE: Police, Tel. 4222; Ambulance, Tel. 4432; Fire, Tel. 2333.
TELEPHONES: Placing of telephones on board can be arranged with the local telephone company (MATELCO).
SHORE LEAVE: Crews can be allowed ashore in company of an Immigration Agent.
DEVELOPMENTS: Dredging of the port basin to an average depth of 25 ft.
GENERAL: Vessels intending to call at Legazpi shall apply for a berth space at least 24 hours before arrival. No dirty ballast may be dumped into the territorial waters of the Philippines. Rat guards shall be placed on all mooring lines. Berth allocated is on a first-come first-served basis.
AUTHORITY: The Port Manager, Philippine Ports Authority.

MANILA, Luzon: 14.35 N. 121.58 E. (See Plan Book)

See "General" before first port.
PORT LIMITS: Manila Harbour is defined as that portion of Manila Bay within the following boundaries:

A line extending from the Vitas Estero due west (270°) to its intersection with a line running south (180°) to Sangley Point Light, thence along this latter line towards Sangley Point Light until its intersection with a line running northeast (075°) to the northwest corner of the airport site to the shore to the mouth of the Vitas Estero, the place of commencement. (Philippine Coast Pilot, Part 1, Coast and Geodetic Survey, 1968 edition, p.5–92).

However, Port of Manila jurisdictional district includes that of the Pasig River and the Limay and Mariveles Sub-ports.
DOCUMENTS:
Passenger List
Crew List
Inward Foreign Cargo Manifest
Stowage Plan
Visa for Crew
Smallpox Certificate.
PILOTAGE: Pilotage in and out of Manila Harbour and to the piers and into the Pasig River is compulsory.

Agents or owners of vessels calling at the Port of Manila shall inform the Pilot of their vessel's arrival. Agents can contact the Pilots Association through Channel 13, 24 hours a day including Sundays and Holidays. Pilots are available day and night.

The pilot boat is a white vessel with a big letter "P" and the number of the boat painted red at the forward end of the vessel. It is usually located in the vicinity of quarantine anchorage where port formalities are conducted.

During bad weather, the pilot boat is located inside the breakwater upon the expressed permission of port authorities.

Foreign vessels are boarded outside the breakwater while inter-island vessels at buoy No. 1 near the entrance to the Pasig River and off the lighted buoy north of north breakwater.

Notice of vessel's arrival shall be made at least 24 hours before their arrival.

Lights exhibited when a vessel has a Pilot on board are white over red together with other regular navigational lights. Otherwise, only navigational lights are displayed.

During typhoons and bad weather, Pilots require vessels to rig the pilot or accommodation ladder on the lee side.
ANCHORAGES: Vessels which for any reason do not intend to enter either harbour or the river immediately on arrival may anchor anywhere outside of the entrance channel. There is also deep water anchorage inside the breakwater. Anchorage is regulated by the Harbour Operations, Port of Manila, Philippine Ports Authority.

Quarantine Anchorage: The Manila Quarantine Anchorage is bounded as follows: Beginning at the Manila Outer Harbour Lighted Buoy 1, approximate position Lat. 14° 33′ 09″ N., Long. 120° 54′ 04″ E. thence 000°, 2,360 yards to position Lat. 14° 34′ 23″ N., Long. 120° 54′ 00″ E., thence on a range of 076° 24′ (Customhouse in line with City Hall Tower), 4,000 yards to approximate position Lat. 14° 34′ 50″ N., Long. 120° 56′ 14″ N., Long. 120° 56′ 00″ E., thence 242° 30′, 4,440 yards to the Manila Outer Harbour lighted Buoy 1, the point of commencement.
Forbidden Anchorage: Anchorage is prohibited in that portion of Manila Bay known as the Cable Area which is defined as follows: From a point approximately at Lat. 14° 33′ 42″ N., Long. 120° 59′ 05″ E., the junction of the breakwater forming the south side of the Yacht Basin with the shore of Manila Bay, thence along the breakwater to its end, from its end 255° to 3.65 miles north of Sangley Point Light, thence 66° to the shore of Manila Bay.

Explosives Anchorage: Vessels having gasoline, dynamite or other highly inflammable or explosive compounds onboard are not permitted to berth at piers or wharves until such cargo has been discharged. Such cargo must be discharged into lighters from vessels at the anchorage within the circle with a radius of 175 yards centered in Lat. 14° 35′ 15″ N., Long. 120° 54′ 05″ E.

Other Special Anchorages: Lighters, scows, cascos and similar craft are prohibited from anchoring east of the breakwater, Manila Harbour, except in the following designated places:

(a) South of the new Luneta, inside of vessels' anchorages, but only in cases of urgent necessity and with special permission from the Surveyor of the Port.

(b) Along the east side of the west breakwater and within 85 yards of it, and well clear of the fairway leading to the Engineer Island slipways and well clear of the manoeuvring space ordinarily needed by vessels docking or leaving the oil wharf. No craft shall moor along the breakwater beyond the sharp bend of the breakwater towards the gap.

(c) In the Inner Basin (Engineer Island) east and well clear of the fairway and then only in case of urgent necessity. It is provided that such craft during severe typhoon weather with special permission of the Surveyor of the Port, may anchor temporarily in the Inner Basin west of the fairway, but well clear of the vessels.

Others: 1. No vessel shall anchor or moor in any prohibited anchorage nor use an anchor in that area except for the purpose of assisting in berthing alongside or unberthing.

2. No vessel shall anchor in, or use an anchorage, other than for the purpose for which the anchorage is designated or intended.

3. No vessel shall anchor, berth, moor or lie:
(a) in the approaches to a port.
(b) In any principal fairway.
(c) In such a manner as to obstruct the approach to anchorage or pier/wharf used by other vessels.

(d) In a cable reserve area, or in any special anchorage indicated on the chart of the Port or Port district except for the purpose specified.

(e) In a position which is likely to foul a vessel which is anchored, moored, or made fast to a buoy.

RESTRICTIONS: 1. No explosives or dangerous goods shall be loaded or discharged between the hours 1800 and 0600 without the permission of the Authority.

2. No vessel or harbour craft with explosives or dangerous goods on board shall remain alongside any other vessel or craft, pier or wharf or other physical landing place between the hours 1800 and 0600 without permission of the Authority.

3. No person shall smoke and no fire or naked light, other than navigation or signal lights prescribed by the Collision Regulations, shall be allowed on board any vessel or harbour craft which has or is about to receive on board any explosives or dangerous goods.

MAX. SIZE: The maximum permissible vessel size inside the port is 9.4 m. draft, 450 m. length and 220 m. breadth. Beyond these measurements, vessels can be allowed only during high tide.

HEALTH: There are three types of pratique that can be obtained at the port: Free pratique, provisional pratique and radio pratique.

Foreign vessels calling at the port are inspected by Immigration officers. When all the quarantine rules and regulations are complied with and the vessels found free of any quarantinable or communicable diseases, free pratique is obtained by the vessel.

On the other hand, if some of the conditions above are not satisfied, a provisional pratique is given by the Quarantine.

Radio Pratique is provided to army and navy ships on the following grounds:

1. A doctor is among the crew of the ship.
2. There is no member of the crew sick of any disease.
3. Vaccination certificates of the crew are in order and valid.
4. The vessel is not from a sick area.

For vessels calling at the Port of Manila, but already coming from another port of entry in the Philippines, Pratique is automatic. However, if somebody aboard the vessel is sick during the voyage, pratique shall still be obtained.

RADIO: The particular radio station to be used by a vessel to route ETA cables to agent is at the descretion and selection of the vessel.

VHF: So far, VHF facilities are not yet available at the Port. However, vessels can use Channel 16, the International calling frequency through Radio Manila on the following schedules:

0730–2100 hrs. – on ordinary days
0730–1700 hrs. – on Sundays and Holidays.

RADAR: No existing Port Radar Service.

TUGS: Tugs normally join vessel inside the breakwater.

BERTHING: There are five finger piers at South Harbour.

Pier 3: 4 berths available. Depth of water: Berth No. 1, 2 and 3 – 30 ft. Berth No. 4 – 21–25 ft. cargoes handled – containerized cargoes and general cargoes.

Pier 5: 5 berths available: Berth 1 – 23–28 ft. Berth 2 – 28–31 ft. Berth 3: 31 ft. Berth 4: 28–31 ft. Berth 5: 24–28 ft. cargoes handled – general cargoes and containerized cargoes.

Pier 9: 5 berths available. Berth 1: 23–28 ft. Berth 2: 23–28 ft. Berth 3: 31–30 ft. Berth 4: 23–28 ft. Berth 5: 23–28 ft. cargoes handled – general cargoes and containerized cargoes.

Pier 13: 7 berths available. Berth 1: 27–28 ft. Berth 2: 28–30 ft. Berth 3: 31–32 ft. Berth 4: 32 ft. Berth 5: 25–32 ft. Berth 6: 27–28 ft. Berth 7: 23–28 ft. cargoes handled – containerized and general cargoes.

Pier 15: 5 berths available. Berths 1 and 2: 35 ft. Berth 3: 32 ft. Berth 4: 30–32 ft. Berth 5: 23–30 ft. cargoes handled – general and containerized cargoes.

Both self-sustaining and non-sustaining vessels can be accommodated at South Harbour.

The following are the quay lengths: Pier 3 – 802.53 m. Pier 5 – 825.25 m. Pier 9 – 873.62 m. Pier 13 – 950.28 m. Pier 15 – 888.46 m.

CRANES: None.

BULK CARGO FACILITIES: See "Berthing".

SPECIALIZED CARGO HANDLING FACILITIES:

1. One Roll-on/Roll-off ramp with 50 long tons capacity at Pier 13.
2. Three gantry cranes with 35 tons capacity. One at Pier 3. Two at International Port.
3. One Manitowoc Crane with 70 tons capacity.

Liquid cargoes are not handled at South Harbour.

BRIDGES: None.

STEVEDORES: Arranged by vessel's agent prior to arrival.

MEDICAL: Notice from shipping agents is required at least 24 hours in advance. There is one hospital clinic available at the port – the Roberto S. Oca Hospital Clinic located at Gate 4, South Harbour.

For quarantinable diseases, there is a 12-bed hospital, the Quarantine Isolation Centre is located at the airport.

With regards to certificates, only smallpox certificates are needed.

TANKERS: Tankers are very seldom accommodated at the Port. The Limay and Mariveles Sub-ports received tankers.

Rosario: Filoil refinery sea berth: Is located at the entrance to Manila Bay position: Lat. 14° 26′ 30″, Long. 126° 46′ 40″. This position is 2.5 miles off the shore of Rosario, Province of Cavite.

The mooring area is marked by 6 mooring buoys. A ship's guide buoy marks the point where the ship's starboard anchor will be dropped upon entry into the berth. 4 other buoys inside the berth at midport mark the end of the submarine pipe-line, centre of ship's manifold and the hose ends respectively. The bearing of the centre of the berth is N. 65° E. The depth is 50 ft. at high tide and 45 ft. at low tide approximately.

The weather is quite good during the dry season, but is unfavourable during monsoon season (May to November). Wind and swells are mostly from a S.W. direction and usually prevalent during monsoon season.

It is emphasied that vessels moored at the berth must be in good condition to clear the berth immediately in case of an emergency. Ship's engines and gear must be ready with full power for immediate use. Ship's personnel should be at their stations at all times during mooring, unmooring and cargo unloading operations.

Radio: Filoil Makati office may be contacted by dialling telephone Nos. 87-40-61 and 87-40-71. The Rosario refinery may be contacted by dialling telephone Nos. 47-95-51 and 47-95-53.

Communication from the sea berth with the refinery, Filoil's launch and Filoil representative on board is through VHF radio. If VHF radio fails, the Filoil launch will be despatched to bring the message either way.

Filoil representative on board maintains a radio watch and constant communication with the shore for general purposes and emergencies.

Luzon Stevedoring Company tugboats also maintain a constant radio communication with their representative at the shore. In case of emergency, messages can be relayed via these tugs.

Ship's Agent: All vessels carrying crude or other cargoes for discharge at Filoil refinery sea berth must appoint their local ship's Agent who will provide them with the necessary ship husbandry services.

Notice of Arrival: They must report their estimated time of arrival to Filoil Refinery Corporation, cable address' "Filoil", Manila, Philippines, 3 days after leaving port of loading and 72 hours before arrival at Manila.

Pilot and Boarding Parties: Pilots are arranged for by the ship's Agent. Generally, Pilots board the tanker at the Manila anchorage to assist the Master to moor in the berth and leaves at the sea berth after berthing.

Filoil representative boards the tanker 1 mile before the sea berth, but if it is the first voyage, he boards the tanker together with the Port and Government authorities at Manila anchorage.

Tugs: Tugboat service is arranged for by ship's Agent. Tugs generally come from Manila. Give at least 48 hours notice when ordering tugs.

Quarantine, Customs and Immigration: Manila is the port of entry for the Rosario sea berth. Therefore, entry and clearance must be arranged by the Ship's Agent at Manila. Boarding officers board the vessel in the Quarantine anchorage prior to arrival within the mooring area. Pertinent government officials should be given sufficient time,usually not less than 24 hours Monday to Friday, and 48 hours Saturday and Sunday. Generally, entry and clearance can be arranged by the Agent who should advise Customs well in advance of the vessel arrival.

Ballast, Bilge and Garbage Disposal: There are no ballast facilities at the refinery. Masters are advised that in Manila Bay, the Harbour-Pollution regulations are rigidly enforced. Therefore no bilge water, oil contaminated water, garbage or similar refuse which may pollute the sea water in any way, is to be discharged overboard while the vessel is within Manila Bay and approaches thereto. The staff at Rosario are required to report any violation of this Philippine Merchant Marine regulation.

Launch Service: Regular launch service for crew transportation is not available and has to be arranged through ship's Agent. The Luzon Stevedoring launch is used to run lines, assist in picking up cargo hoses, etc. Filoil's owned or hired launch is for the exclusive use of Filoil representative and personnel boarding the vessel; however, transportation may be arranged through Filoil representative in cases of emergency.

Medical: Medical attention can be arranged by the ship's Agent. There is a clinic at the refinery. The nearest hospital is 0.5 miles from the refinery.

Heading for the Sea Berth: As soon as government clearance (pratique) is granted, vessel lifts anchor and heads for Rosario sea berth, a distance of about 16 land miles from Manila anchorage.

Vessel Mooring Gears and Facilities: The vessel's bow is secured in the moorings by the use of both bower anchors. Therefore, ship must have both bower anchors ready for immediate use, each with a minimum of 150 fathoms of chain. Anchors, chains and anchor windlass must be in good condition and capable of heaving ship ahead with the chain or letting 1 chain go out on the run while heaving in on the other. Mooring buoy No. 6 can be used instead of port anchor if 3 mooring lines are hooked up.

Vessels must be equipped with 10 in. manila or better mooring lines of not less than 8 in. circumference and not less than 90 fathoms in length of each line. 2 lines are required for each of 6 mooring buoys, 5 of which are aft to secure the ship's stern position. Therefore, 5 lines are to be available on the fantail for mooring to buoys Nos. 1, 2, 3, 4 and 5.

Vessels having wire moorings secured on warping winches with surge valve and brake are acceptable. Warping winches must be adequate to handle mooring line under heavy strain. Efficient stopper lines must be readily available to "stop" mooring lines for transfer from winch to bitts without loss of tension.

All chocks other than roller (if free) shall be fitted with chafing gear to protect lines before berthing operation commences, endeavouring to install chafing gear after the ship has been moored has proven impracticable. Old fire hoses or substitute is suggested.

If in the opinion of the Pilot, the vessel's mooring facilities, lines and/or gear are inadequate, he will inform the Master and Filoil representative, and in such event the vessel will not be allowed to enter the moorings until such conditions are deemed satisfactory.

Docking procedure: To moor, the vessel approaches the mooring heading due South. When in proper position, the starboard anchor is dropped and the chain allowed to run until vessel crosses the mooring area to a point where the port anchor is let go or when the mooring lines are dropped to buoy No. 6. Then the engines are backed and the vessel with the assistance of the tug, manoeuvred into the mooring area where after lines are run to the 5 mooring buoys and then the anchor chains are brought tight simultaneously with the securing of the stern to the mooring buoys. The vessel is then heading due West parallel with the tide current flow.

When secured in the berth, vessel should not be closer than 10 m. from the end of the submarine pipe-line. Bower anchor chains should have spread of not less than 30 degrees on either side of the ship's imaginary fore and aft line extended forward. Stern buoy moorings should be set as taut as possible and anchors form an approximate angle of 300° with water line.

Submarine Hose Lifting Gear and Manifold Connection: The derrick on the port side in way of the hose connection must be rigged to lift not less than 5 tons. The topping Lift shall be available to raise or lower the boom as required and the winch and whip shall be of a quality and nature to lift the hose exactly and evenly. The hose and fittings are considered to weigh 3 tons. The hose connecting gang and its supervisor are form Luzon Stevedoring Company and are under contract to Filoil. They will use the ship's machinery to raise the 2×10 in. hoses from the bottom and secure same to the ship's side. They will also disconnect the hoses and lower same to the bottom of the sea after completion of discharging of cargo. The ship's manifold must have 10 in. flanges for connection to 10 in. submarine hoses.

Safety Rules and Regulations:

Mooring lines must be in good condition and kept tight at all times.

Sparking smoke stacks must not be permitted. If for any reason a stack catches fire or emits live sparks, cargo operations must be stopped immediately on this and adjoining vessels.

Throw nothing overboard from deck or portholes while at sea berth.

During cargo and/or ballast operations, vessels shall show red flag by day and red light by night. No smoking amidships during cargo and/or ballast operations.

No chipping, repairs, welding or hot work is allowed on any vessel while at sea berth unless special permission is given and a safety permit obtained. The ship must always be ready to sail out at a moments notice.

Pumping crude oils must be stopped during electrical storms or if lightning appears in close vicinity.

In case of fire, shut down all pumping and sound alarm. Disconnect hoses so as to be ready to shift from berth. All vessels at berth must have main engines ready for use. Water, foamite and steam are never to be used on electrical fires. Use dry chemical or Pyrene. Use foamite, water fog, steam CO_2 or dry chemical on oil fires.

Avoid spilling oil on deck. If any oil is spilled, it must be cleaned immediately. Gasoline or naphtha is not to be used for cleaning.

Only Underwriter's laboratory approved flashlights permissible use in methane and air misures by the U.S. Coast Guard are to be used for loading, discharging, ballasting and/or repair work on vessels.

Ullage screens are to be kept in place during cargo and/or ballast operations.

Tugboats are not to be allowed alongside while discharging cargo or ballast.

No extension cord or portable cables which are connected to an electric power source shall be used on deck in way of cargo or fuel tanks unless vessel is certified gas-free.

Fire hose shall be laid out and suitable fire extinguishers available. Failure to comply with any of the above rules will result in the vessel being shut down. Sufficient copies are to be presented to the Master so that they may be posted in various places about the vessel. It is the Master's responsibility to see that these rules and regulations are enforced.

Discharge of Cargo; After hoses are connected the Filoil representative will, after communication with the refinery, advise commencement of pumping. In the beginning the rate is to be slow and the Filoil representative will advise when pumping rate is to be increased to maximum. Discharge of cargo may be stopped due to adverse weather conditions. In which event, the hoses are disconnected and the submarine hose lowered to the sea bottom. Cargo discharge will be resumed when the adverse weather moderates.

Crude oil discharge through 2×10 in. hoses 255 ft. long through a 10 in check valve and 10 in. gate valve then into the 24 in. pipe-line which is 2.5 miles in length. The height of the shore tanks (foundation) above sea level if 15.5 ft. Pressure at the ship's side must not be less than 60 lb. Maximum pressure allowed is 120 lb. at the ship's side.

Stripping – Tank Draining: To keep a discharge time to a minimum, tanks should be stripped into one of the ship's tanks and the final stripping shall be from only one tank.

Board and Lodging Accommodation: Sufficient accommodation and meals are requested to be available and prepared for the Filoil's representative in the officers' quarters. He will remain with the vessel until casting off or until relieved to be of assistance to the crew.

DENSITY: Variable.

FRESH WATER: Fresh water is available from floating barges.

FUEL: This depends upon the requirement of the vessel. However, as to the quantity, the Philippine Government can only sell vessels sufficient for it to reach the next port of call.

FIRE PRECAUTIONS: Except for the "Absolutely Non-Smoking Area", there are no other regulations.

REPAIRS: Only minor repairs possible.

DRY DOCKS: No drydock at the Port of Manila. There is one however at a nearby sub-port, also within the jurisdictional area of the Port of Manila, at the Bataan Shipyard and Engineering Corporation.

SURVEYORS: None.

GANGWAY/DECK WATCHMEN: This service is available whenever needed.

HATCHES: Stevedores usually open and close hatches. In special cases, when the vessel is of a different model and the hatches are constructed differently, crew members are requested to assist stevedores.

CUSTOMS ALLOWANCES: The only allowable quantity of goods to be held out of bond is that which the member of the crew can use personally. Usually, one or two bottles of wine and a pack of cigarettes. Those brought out from the vessel beyond this will be considered for commercial consumption and will therefore be charged.

CARGO GEAR: See "Specialized Cargo Handling facilities".

REPATRIATION: Shipping Agent can arrange this with the Bureau of Immigration.

AIRPORT: The nearest airport is the Manila International Airport, about 8 kms. from the Port of Manila. This is served by regular airlines.

TIME: GMT plus 8 hours (Summer Time GMT plus 9 hours April–June).

HOLIDAYS: There are about 11 national holidays in the Philippines. Working days are from Monday to Friday, for government employees, and Monday to Saturday, for private employees. However, the Port of Manila does not observe any of these holidays or non-working days. Operations at the port are on a day-to-day basis and no holidays.

POLICE/AMBULANCE/FIRE: Police: 59-90-11; 59-43-44; 59-63-36; 59-64-49. Ambulance: 59-60-61;50-30-11. Fire: 47-77-17; 88-00-58; 25-56-80; 87-21-20.

TELEPHONES: Arranged by vessel's agent from the Philippine Ports Authority.

SERVICES: Apart from the usual services of the port, others are ship salvage, laundry and container leasing.

SHORE LEAVE: Crew members are allowed ashore as long as sufficient members of the crew are left onboard to manage the vessel in case of unforeseeable incidents. This is necessary in order that the vessel can be removed from berth or anchorage.

IDENTIFICATION CARDS: Shore passes are issued by the Bureau of Immigration.

REGULATIONS: No particular or unusual regulation are observed at the port.

DELAYS: The expected delays are: During inclement weather, some difficulty may be encountered in berthing.

And when some of the specialized cargo handling facilities have failures.

DEVELOPMENTS: An additional three berths at the International Port (94 hectare area) will be in use by 1979. This will become the container terminal and bulk cargo complex for the port. It is expected to handle not less than 17,000 containers daily when in full operation.

Two giant gantry cranes have been installed at the International Port. A further gantry crane will be installed in the area in 1979.

AUTHORITY: Philippine Ports Authority (PPA).

MASAO (Including Nasipit): 09.06 N. 125.22 E. (See Plan Book)

See "General" before first port.

PORT LIMITS: First proposal: From Bolo-bolo Point to Carmen, Agusan Norte.

Granted: Bolo-bolo Point up to Anakan area.

Pending approval: Bolo-bolo Point to Sipaca Point.

DOCUMENTS:

4 Crew Lists
4 Passenger Lists
2 Store List
4 Stowage Plan
2 Personal Effect List
2 Inward Cargo Manifest
1 Ship's Information.

PILOTAGE: Telegraphic address: Masao Pilots Butuan City.

ETA: Ocean going vessels – 24 hours notice. Coastal vessels – 12 hours notice.

Pilot boat description: Upper structure white; lower structure, black with a letter "P" at the bow. During night time, when a vessel requires a Pilot, particular light used is permanent red at the uppermost portion of the boat and a flashing white light.

Location of Pilot Station: In Masao, but they have office at San Francisco St., Butuan City near the Butuan R. C. Wharf.

No alternative area in the event of bad weather as it is an open sea.

Location of anchorage for vessel awaiting a Pilot is at Quarantine Anchorage Area 9° 00′ 30″ N. and 125° 28′ 15″ E.

ANCHORAGES: Depth of safe anchorage: 75 m. deep along the shore line.

Masao Anchorage Berth:
Anchorage No. 1: 9° 01′ 05″ N., 125° 29′ 50″ E.
Anchorage No. 2: 9° 01′ 00″ N., 125° 29′ 40″ E.
Anchorage No. 3: 9° 00′ 55″ N., 125° 29′ 30″ E.
Anchorage No. 4: 9° 00′ 45″ N., 125° 29′ 20″ E.
Anchorage No. 5: 9° 00′ 35″ N., 125° 29′ 00″ E.
Anchorage No. 6: 9° 01′ 15″ N., 125° 29′ 45″ E.
Anchorage No. 7: 9° 01′ 10″ N., 125° 29′ 35″ E.
Anchorage No. 8: 9° 01′ 04″ N., 125° 29′ 25″ E.
Anchorage No. 9: 9° 00′ 55″ N., 125° 29′ 05″ E.
Anchorage No. 10: 9° 00′ 50″ N., 125° 28′ 55″ E.

RESTRICTIONS: None.

MAX. SIZE: Masao: No limit.

Nasipit: Maximum possible length of vessels is 550 ft., breadth, 65 ft., maximum mean draft is 25 ft.

TUGS: Tug assistance is only available at the port of Nasipit, if needed.

BERTHING: No berthing facilities available. All vessels anchor at specified anchorage areas. Also see "Max. Size".

CRANES: None.

BULK CARGO FACILITIES: None.

STEVEDORES: The Arrastre/stevedoring contractor for the Port of Masao is the Masao Integrated Port Services, Inc. (MIPSI). Its area of operation starts at Masao anchorage and along the coastline 125° 25′ East of the municipality of Buenavista, Barrio Masao, Lumbocan, Magallanes, Cabadbaran, Tubay up to Agusan-Surigao coastline boundaries including Magallanes Bay up to Kayukanan Creek.

ETA advise required to arrange gangs at least 4 hours before arrival.

MEDICAL: Hospital facilities available:
1. Butuan General Hospital
2. Butuan Maternity and Children's Hospital
3. City General Hospital and Medical Centre.

DENSITY: Average salinity of water in the port and surrounding anchorage area is 1.010–1.012.

FRESH WATER: Supply of fresh water can only be made possible through the use of barges. Water supply is also available at the sub-ports of Nasipit and Butuan.

REPAIRS: Only minor repairs can be undertaken.

HATCHES: Opening or closing of hatches is normally carried out by stevedores.

AIRPORT: A few kilometers from the city is the Bancasi Airport which caters to domestic flights to and from Cebu and Manila; while the Philippines Aero Transport Inc., has a daily flight to and from Cagayan de Oro City.

HOLIDAYS: New Year's Day (January 1st); Holy Thursday, Good Friday and Easter Sunday; Labour Day (May 1st); Independence Day (June 12th); Fil-American Friendship Day (July 4th); National Heroes Day (November 30th); Christmas Day (December 25th); Rizal Day (December 30th).

POLICE/AMBULANCE/FIRE: Police: 22-224; 115; Fire: 114; Ambulance: 24-14.

TELEPHONES: Not possible to place telephones on board.

SERVICES: Ship chandling service available at Lumbocan and Butuan city.

SHORE LEAVE: After clearing inwards, crew members are allowed to go ashore without special permission.

AUTHORITY: The Philippine Ports Authority; Port Management Unit; Port of Masao, Butuan City.

MASBATE: 12.35 N. 123.61 E. (See Plan Book)

DOCUMENTS:
Inward Coasting Manifest.
Hatch Plan or Stowage Plan.
Vessel's Information Card.

PILOTAGE: Pilotage is compulsory. ETA advise should be sent to the Harbour Pilot Association, Legazpi City at least 36 hours before vessel's arrival. The vessel is met by the Harbour Pilot about 2 kms. from the mouth of the channel of Masbate Bay aboard a boat displaying a Pilot's flag.

ANCHORAGE: Within Masbate Pass, but not greater than 500 m. from the mouth of the channel leading to Masbate Bay. The area within the Masbate Bay could only be used during emergencies and typhoons.

RESTRICTIONS: Present port facilities can only accommodate 1 vessel at a time due to draft limitation and physical length of the wharf.

MAX. SIZE: LOA – 300 m.; Draft – 28 ft.

HEALTH: Vessels will clear quarantine on arrival at Masbate harbour. Quarantine officers will normally board the vessel once it is inside Masbate Bay.

BERTHING: The entire berth length of the wharf could be utilised for the loading or unloading of cargoes. Length of quay 180.0 m. Width 10 m. Max. depth of water 30 ft. Quay height above sea level 2 m. at high tide and 4 m. at low tide. Average rate of loading/discharging 20 tons per gang hour.

CRANES: None available.

STEVEDORES: Provided by Masbate Consolidated Arrastre, Inc.

MEDICAL: One government hospital and three private hospitals.

FRESH WATER: Available by special arrangements.

FUEL: All grades obtainable from Caltex depot in the area and supplied by lorries alongside.

GANGWAY/DECK WATCHMEN: Available, but not compulsory.

HATCHES: Opening and closing of hatches are part of the stevedores work or at the Master's option.

REPATRIATION: All facilities available for crew changes; good sea and air connections.

AIRPORT: Three kilometres from port area. One flight to Manila daily.

TIME: GMT plus 8 hours.

HOLIDAYS: New Year's Day (January 1st); Holy Thursday; Good Friday; Labour Day (May 1st); Independence Day (June 12th); P.I.U.S. Friendship Day (July 4th); Bonifacio Day (November 30th); Special Public Holidays declared by the Prime Minister of the Republic of the Philippines is also included.

If any other legal holiday falls on a Sunday the following day is observed as a Holiday. Cargo work can be arranged on any or all holidays with the vessel's Agent.

POLICE/AMBULANCE/FIRE: Police and ambulance can be contacted through the local PPA office.

TELEPHONES: Placing of telephones on board can be arranged with the local telephone company (PILTEL).

SHORE LEAVE: Crews can be allowed ashore in company of an Immigration Officer.

DEVELOPMENTS: Extension of the wharf by 80 linear metres.

GENERAL: Vessels intending to call port at Masbate shall apply for a berth space at least 24 hours before arrival. No dirty ballast may be dumped into the territorial waters of the Philippines. Rat guards shall be placed on all mooring lines. Berth allocation is on a first-come first-served basis.

AUTHORITY: The Supervising Officer, Philippines Ports Authority.

PUERTO PRINCESA: 09.44 N. 118.43 E. (See Plan Book)

See "General" before first port.

Puerto Princesa, a large irregular inlet between Bancaobancaon Point and Panagtaran Point, is 2 miles wide at the entrance, extending about 6 miles in a Northwesterly direction. Coral reefs about 0.5 mile wide making out on the entrance points narrow down the navigable width of the channel to about 1 mile, depths of 34 fathoms (62.2 m.), shoaling to 9 fathoms (16.5 m.) in the vicinity of the pier. The major portion of the Northwestern and Western part of the bay is mostly shoal. The shoreline is generally fringed with mangroves and fronted by mud flats. The surrounding land consists of extensive wooded plain, backed by a high mountain chain. Several small rivers navigable by launches and small boats empty into the bay. The inner part of the harbour is a good typhoon anchorage.

PORT LIMITS: About 1 mile South of the pier. This is the entrance to the inner harbour of Puerto Princesa.

PILOTAGE: Pilots can be contacted by radio message through the shipping Agent not less than 24 hours of ETA indicating among others the following information:
1. Name of vessel
2. Name of shipping lines
3. Country vessel is registered
4. Type of vessel
5. Overall length
6. Draft
7. GRT
8. Volume of cargo to be discharged and storage required
9. Nature of cargo
10. Passengers disembarking, transit and embarking if any.

When Pilot is aboard the pilot boat, an international flag "P" will be seen flying at her foremast.

ANCHORAGE: Vessels not going alongside the T-shaped pier may anchor Southwestward of Princesa Point in 12 to 16 fathoms (21.9 to 29.2 m.), mud bottom. A better protected anchorage may be had in 9 to 10 fathoms (16.5 to 18.3 m.) about 400 yards Northward of the end of the pier.

RESTRICTIONS: At night, in approaching Puerto Princesa from offshore, the lights in the vicinity of Canigaran, Northward of the entrance, may cause some confusion to strangers as they are visible long before the Puerto Princesa Light can be seen. The port light which is fixed red, visible 7 miles over an area of 041°, only becomes visible close in and just off the mouth of the harbour. At daytime a course Southward of the range Thumb Peak-Tidepole Point clears the reef on the North side of the entrance. Mount Beaufort on range with Tidepole Point clears the reef on the South side.

MAX. SIZE: Vessels not going to dock alongside the pier may anchor at 9 to 10 fathoms or 12 to 16 fathoms. For vessels going to dock alongside the T-shaped pier, permissible length and draft are the following: Length – 126 ft. (39.4 m.) draft – 27 ft. (8.2 m.)

HEALTH: Quarantine doctors are assigned in the Port to board the vessel and check any suspected disease or fever.

RADIO: Vessels at sea usually send their radio messages through the Association of International Shipping Lines in Manila to their Agents.

VHF: Not available.

RADAR: No radar station in the port.

TUGS: Tug service can be availed of by communicating with the local shipping Agent.

BERTHING: The town has a T-shaped concrete pier with a berthing face of 126 ft. (38.4 m.) Depths are 27 ft. (8.2 m.) alongside and 31 ft. (9.4 m.) about 6 yards off the face. The Northern and Southern ends of the "T" have depths of 11 ft. (3.3 m.) and 15 ft. (4.5 m.) respectively. The inshore arms of the T has depths of 11 ft. (3.3 m.) at each berth. Sailboats and other shallow vessels berth on each side of the concrete approach. The wooden piles, are 8 ft. (2.4 m.) and very close together, are about 120 yards N.E. of the offshore end of the pier. Vessels coming alongside should exercise caution to avoid these piles. Typhoon signals are exhibited from a pole at the foot of the pier.

CRANES: No cranes available.

STEVEDORES: Advise Agent on volume of cargo to be discharged, storage required and nature of cargo.

TANKERS: May drop anchor at anchorage area.

FRESH WATER: Water supply on a limited quantity.

FUEL: Diesel oil, gasoline and kerosene may be purchased in drums and tins.

FIRE PRECAUTION: No smoking is allowed when vessels are refuelling within a radius of 100 m.

CONSULS: Consuls from foreign countries in Manila.

REPAIRS: No repair facilities.

DRY DOCKS: For small boats only.

SURVEYORS: Lloyds and other classification societies in Manila.

GANGWAY/DECK WATCHMAN: Watchman can be hired from local Security Agencies of the Port.

HATCHES: Opening/closing of hatches is usually done by stevedores.

CUSTOMS ALLOWANCES: Quantity permitted for each crew member to be held out of bond are the following: Cigarettes – 5 packs. Liquor – 1 bottle.

CARGO GEAR: Loading/unloading is effected by ship's gear.

REPATRIATION: No facilities.

AIRPORT: The airport is about 2 miles from the pier with a schedule of two flights from Manila and back daily.

HOLIDAYS: The following are the Philippine National Holidays: January 1 – (New Year's day), Maundy Thursday, Good Friday, April 9 – (Bataan Day), May 1 – (Labour Day), June 12 – (Independence Day), July 4 – (Fil-Am Friendship Day), November 30 – (National Heroes Day), December 25 – (Christmas Day). Cargo handling operations may be arranged on these days at overtime rates.

POLICE/AMBULANCE/FIRE: Puerto Princesa town has all these facilities. There is a provincial hospital in Puerto Princesa. Private practising physicians and drugstores are available.

TELEPHONES: The town is connected to Manila by postal and radio communication but no telephone shore connection facilities for vessels docked at the pier is available.

SERVICES: No special services available.

SHORE LEAVE: Crew members are allowed ashore provided they always carry with them their Seaman's book or Passport.

IDENTIFICATION CARDS: Seaman's Book is sufficient for crews to identify them when ashore.

DELAYS: Due to lack of some Port facilities, delay in berthing, loading, discharging and bunkering is sometimes experienced.

DEVELOPMENTS: A proposed extension of 30 m. on the Northern end of the pier and 47.57 m. on the Southern end. Reclamation at the Southern foot of the causeway.

AUTHORITY: The Collector of Customs.

SAN FERNANDO, Luzon: 16.37 N. 120.18 E. (See Plan Book)

See "General" before first port.

APPROACHES: Vessels enter the harbour through a channel marked by 2 buoys and 2 range lights 144.5° (fixed green and red light flashing every 3 seconds.).

PILOTAGE: Pilotage is compulsory. Vessel is met at mouth of harbour by Pilot boat that flies a red flag with letter "P" in white. Pilot then brings the vessel to Quarantine Anchorage. Conventional signals are used to call Pilots.

ANCHORAGE: Located at centre of the bay with 8 to 9 fathoms and good holding ground. In the event of rough weather or strong moonsoon wind, vessels in the harbour are brought here for safety.

RADIO: No direct radio communication system with vessels at sea is available in the locality. Ship Masters report ETA to agent in Manila who relay message to San Fernando by telex or commercial radiogram. The PMU San Fernando may be reached by Long Distance telephone 25-57 or SSB radio transceiver 8776.5 kHz.

Arrival advance: 48 hours before ETA, ship agent files request for berth at PMU office indicating: ETA, draft, LOA and breadth, consignee or shipper, type of cargo and stowage, dangerous cargo, (if any). Heavy lifts, (if any), number of hatches to be worked, vessel is self sustaining or not.

24 hours before arrival or earlier, upon receipt of Master's advice by telegram, a berthing schedule is issued by the PMU. Copies are furnished to: Pilot, consignee/shippers, Arrastre-stevedoring contractor, ship agent.

MAX. SIZE: Size of vessels that could be serviced is controlled by depth along quay:

Pier	Depth Pier Head	Depth Shore End	Length	Width
Gov't. RC	54 ft.	12 ft.	600 ft.	60 ft.
Shipside, Inc.				
Timber	60 ft.	30 ft.	850 ft.	80 ft.
Philex Conveyor	32 ft.			

HEALTH: Immediately after vessel anchors at Quarantine Anchorage, quarantine officers board and clear vessel. Imported grain will be fumigated on board vessel at anchorage.

Boarding formalities: Members of party are BOC inspector and guards, Immigration, Philippine Coast Guards, pratique is then issued to indicate vessel as "arrived" and subject to Charter Party terms, laytime will commence.

TUG: 1 tugboat owned by Shipside, Inc. of 1,100 h.p. engine equipped with Kort Nozzle, is available for assisting, docking and undocking and launch service. Tug assistance during docking and undocking at the Shipside Pier is compulsory while its use at the Government and Philex Piers are at the option of the harbour pilot. A shipping company may bring in tugboat to assist its own vessel.

Tug lines are available at no extra cost. Conventional signals are used by Pilot and Master of tugboat.

Tug assistance rates: 0800 to 1700 hrs, regular time – others, overtime.

BERTHING: See "Max. Size".

STEVEDORES: Stevedores, longshoremen, checkers and watchmen for the 2 piers are provided by:

Government Pier – Northern Carriers Corp. Shipside pier – Shipside, Inc.

Stevedores, checkers, etc. are non-union members. Any number of gangs can be ordered on 3 hours notice. Stevedores work on 3 shifts:

1st Shift – 0000 hrs. to 0800 hrs.
2nd Shift 0800 hrs. to 1600 hrs.
3rd Shift – 1600 hrs. to 2400 hrs.

Sundays, holidays and nights, stevedores are paid overtime rates. Christmas, New Year's Day, Easter Sunday, Good Friday and Maundy Thursday, stevedores will work on double pay.

TANKERS: The 4 oil terminals maintaining tank farms in the port zone are Petrophil, Caltex, Shell and Mobil. They operate a common set of pipe-lines for white and black oil product passing under the government and Shipside Piers. PMU policy is 1 tanker discharging at 1 pier at a time. A "boom" is available at the quay side.

MEDICAL: 3 modern hospitals staffed by trained physicians and specialists and half a dozen clinics. These are open 24 hours.

FRESH WATER: Fresh water available at both piers along side the quay via pipe-lines. Pumping rate: 8 t.p.h. – Summertime. 12 t.p.h. – Rainy days.

Water samples are tested weekly at the Wallace US Air Force Station at Poro, San Fernando.

FUEL: Bunker and other, POL product obtainable and supplied by lorries.

FIRE PRECAUTION: Water pipe-line alongside the quay can be converted to a fire hydrant by manipulating the valves to suck sea water. The oil terminals in the area maintain chemical fire fighting equipment, a "boom" to contain oil spillage and "light water". Voice of America, Wallace US Air Force Station, and the Airport all within a 3 kms. radius to the piers, maintain modern fire trucks.

REPAIRS: Atlantic Gulf and Pacific Co. of Manila operates ship repair facilities including 2 drydocking slipways. A 100 ton floating crane and a fleet of mobile cranes from 25 to 80 tons capacity are among their equipment.

GANGWAY/DECK WATCHMEN: Available from Arrastre contractor upon request of ship agent.

SURVEYORS: Available from Manila, 270 km.

HATCHES: First open and last close normally carried out by crew. Stevedores operate the hatches when it rains.

CARGO GEAR: Arrastre operators maintain complete loading/discharging gear for bulk, general cargo and heavy lifts. Also available are:

11 units — Forklifts, 1 to 8 tons capacity.
2 units — Mobile crane, 25 tons capacity.
1 unit — Floating crane, 100 tons capacity.

IDENTIFICATION CARDS: For control of persons inside the port zone and for security, I.D. should be available when requested by guards.

AIRPORT: San Fernando Airport is 3 km. South of Pier. Philippine Air Lines serve the port with 3 flights weekly.

TIME: GMT plus 8 hours.

HOLIDAYS: New Year's Day (January 1st); Holy Thursday, Good Friday; Labour Day (May 1st); Independence Day (June 12th); RP-US Friendship Day (July 4th); All Souls Day (November 1st); Bonifacio Day (November 30th); Christmas (December 25th); Rizal Day (December 30th).

POLICE/AMBULANCE/FIRE: Police, Tel. 25-77. Hospitals/Ambulance, Tel. 28-44, 23-55, 26-16; Fire Dept. Tel. 24-88; Phil. Constabulary Tel. 25-28.

TELEPHONES: Vessels docked at Shipside Pier may request telephone connection.

GENERAL: *Discharge of ballast.* No dirty ballast may be dumped into the territorial waters of the Republic of the Philippines.

Rat guards: Rat guards shall be placed on all mooring lines to the wharf.

Refuse: May be collected by a truck at P25.00 per trip.

Accessibility: Port is accessible by road, rail and air transportation.

Provisions: Fresh vegetables can be supplied directly from the vegetable capital of the Philippines (Baguio City).

Rest, Recreation: Beach resorts with miles of clean beach just minutes away by car. First class hotels with swimming pools, air conditioned rooms. Baguio City, Summer Capital of the Philippines is 70 kms. East and 5,500 ft. above sea level. A golf course at Camp John Hay, the R & R centre of US Servicemen can be used by civilians.

SHORE LEAVE: Crew members are allowed to go ashore without special permission.

AUTHORITY: PPA, PMU San Fernando.

TABACO: 13.41 N. 123.68 E. (See Plan Book)

DOCUMENTS:

Inward Coasting Manifest.
Hatch Plan or Stowage Plan.
Vessel's Information Card.

PILOTAGE: Pilotage is compulsory. ETA advice should be sent to the Harbour Pilot Association, Legazpi City at least 24 hours before vessel's arrival. The vessel is met by the Harbour Pilot about 2 kms. from the wharf aboard a boat displaying a Pilot's flag.

ANCHORAGE: Within the Tabaco Bay but not less than 500 m. from the existing facility.

RESTRICTIONS: Berthing space is limited due to its physical length and the existence of a shipwreck at the Northern end of the wharf.

MAX. SIZE: LOA – 300 m.; draft – 28 ft.

HEALTH: Vessels clear quarantine on arrival at the Tabaco Harbour. Quarantine officers will normally board the vessel 2 kms. from the existing wharf.

BERTHING: The existing facility can accommodate two foreign-going vessels of regular size at one time. Length of quay 270 m. Width 12 m. Storage area 2 hectares. Max. depth of water 30 ft. Quay height above sea level 2 m. at high tide and 5 m. at low tide. Average rate of loading/discharging, 22 tons per gang hour.

CRANES: 2 shore cranes available with capacities of 20 and 25 tons. For heavy lifts, vessels are required to use their own gear.

STEVEDORES: Provided by Tafworks Arrastre Corporation.

MEDICAL: 1 government hospital and 2 private hospitals.

FRESH WATER: Can be provided by pipe-line or hoses from the port facilities.

FUEL: All grades obtainable from major oil depots at Legazpi City which is approximately 27 kms. from the port area and supplied by lorries alongside.

GANGWAY/DECK WATCHMEN: Available, but not compulsory.

HATCHES: Opening and closing of hatches is part of the stevedores work or at the Master's option.

REPATRIATION: All facilities available for crew changes.

AIRPORT: At Legazpi City.

TIME: GMT plus 8 hours.

HOLIDAYS: New Year's Day (January 1st); Holy Thursday; Good Friday; Labour Day; (May 1st); Independence Day (June 12th); P.I.U.S. Friendship Day (July 4th); Bonifacio Day (November 30th); Special Holidays declared by the Prime Minister of the Republic of the Philippines are also included. If any other legal holiday falls on a Sunday the following day is observed as a holiday. Cargo work can be arranged on any or all holidays with the vessel's Agent.

POLICE/AMBULANCE/FIRE: Police and Fire, Tel. 222; Ambulance, Tel. 215.

TELEPHONES: Placing of telephones on board can be arranged with the branch office of the local telephone company (MATELCO).

SHORE LEAVE: Crew can be allowed ashore in company of an Immigrations Agent.

DEVELOPMENTS: Salvaging of the shipwreck at the Northern end of the wharf, extension of the existing facility by 120 m.

GENERAL: Vessels intending to call at the port of Tabaco shall apply for a berth space at least 24 hours before arrival. No dirty ballast may be dumped into the territorial waters of the Philippines. Rat guards shall be placed on all mooring lines. Berth allocation is on a first-come first-served basis.

AUTHORITY: The Supervising Officer, Philippines Port Authority.

TACLOBAN: 11.15 N. 125.00 E. (See Plan Book)

See "General" before first port.

PILOTAGE: Notice of ETA of vessel must be given at least 24 hours in advance and must be sent through cablegram direct to Collector of Customs, Tacloban City.

ANCHORAGES: Safe anchorage: low tide, 17 ft. draft; high tide, 19 ft. draft; area for anchorage, 300 ft. length.

ENTRY RESTRICTIONS: At the discretion of the Collector of Customs.

MAX. SIZE: Permissible length 300 ft. Draft low tide, 17 ft.; high tide, 19 ft.

HEALTH: Pratique is only necessary and required in the first port of entry; it is automatic when entering ports in the same country or state.

RADIO: Radio communication of the Philippines, Inc., Manila.

TUGS: Ship's Agent arranges tug's lines with watchmen.

BERTHING: Inform Customs Collector at least 24 hours before ETA of vessel so that berthing space can be reserved.

STEVEDORES: ETA advices should be furnished to stevedores through ship's Agent.

MEDICAL: Advance notice of required medical attention to ship's Agent essential.

FRESH WATER: Fresh water available delivered by water-tank truck.

FUEL: Not available.

GANGWAY/DECK WATCHMEN: Necessary for safety of vessel. Ship's Agent makes all necessary arrangements.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CERTIFICATES: All documents required by International Shipping Rules and Regulations.

CUSTOMS ALLOWANCE: One carton cigarettes per week for each man. Wines/spirits at the discretion of the Collector of Customs.

IDENTIFICATION CARDS: Needed for inspection by Immigration Officer.

REPAIRS: Not possible.

REPATRIATION: Immigration Officer effects crew exchanges and arranging necessary repatriations.

AIRPORT: Distance from airport, 9 km., and is regularly served by airlines.

TIME: GMT plus 8 hours. No alterations during the year.

HOLIDAYS: Depending upon agreement with stevedores, work may be performed during holidays.

POLICE/AMBULANCE/FIRE: All departments are within one minute's call from the harbour.

TELEPHONES: Can be connected on board if required.

AUTHORITY: Collector of Customs.

TANAUAN: 11.06 N. 125.01 E. (See Plan Book)

SHIPMASTER'S REPORT: 1976

N.I.D.C. Coconut Oil Pier: Location of berth 11° 06′ 15″ N. 125° 01′ 30″ E. The berth is 7 miles from the Pilot boarding point. Least depth of water in channel from sea to berth, 32 ft. At berth bottom is mud and sand. Density 1025. Docking and undocking in daylight only at any stage of tide.

Anchorage 1.5 miles North of Mariquitdaquit Light. Terminal Information: Use shore hoses. Length of pipe-line – 3,000 ft. connection at manifold – 8 in. Shore-booster pump not used. No steam. Product handled, coconut oil.

Port Information: Pilotage compulsory. Pilot requires 12 hours and 24 hours notice. Pilot boards 1 mile North of Mariquidaquit Island and comes from Tacloban. It is unsafe to enter and leave after dark. Vessels can enter and leave any state of tide. Max. LOA 1,000 ft. Max. beam 90 ft. Max. draft 31 ft. No tugs available. Vessel able to berth and unberth without aid of tugs.

Facilities available: Fresh provisions available from Tacloban, a small town, 20 km away. Chandler requires payment in cash for goods.

Airport at Tacloban. Doctor and hospital available. Groceries, meats and laundry available.

No fresh water, repairs, Lloyds surveyor or fuel available.

ZAMBOANGA: 06.54 N. 122.04 E. (See Plan Book)

See "General" before first port.

PILOTAGE: Vessels approaching the port use International Code Signals for calling Pilot.

Pilot Station: Telegraphic address is Zamboanga Pilots, Zamboanga City. Estimated time of arrival (ETA) must be radioed 24 hours in advance. Pilots always on duty. Pilot boat is wooden launch painted white with red trimmings and displaying the pilot flag. The exact area where a Pilot will board vessel is in the vicinity of Little Sta., Cruz Island, for vessels coming from West, and near the vicinity of Rio Hondo for vessels coming from East. Alternative area in the event of bad weather is in the vicinity of Zamboanga Pier at a distance of at least 1 mile either way. Vessels awaiting Pilot should not necessarily drop anchor, provided 24 hours notice of their ETA is given by local Agents or the Master, to the Zamboanga Pilots, for a Pilot is *always* on duty.

ANCHORAGES: Owing to the steep bank, strong currents and hard, uneven bottom, there are no good anchorages off Zamboanga. However, anchorage may be made anywhere Southward of the wharf at a distance of about 3 cables from shore Eastward of an imaginary line from the Tide Indicator, at a depth of between 25 and 30 fathoms and giving 7 shackles of chain in the water. This will hold vessel even at strongest current of 6 knots. In the event of very bad weather the vessel should transfer her anchorage to Caldera Bay, which is approximately 7 miles West of the anchorage area.

MAX. SIZE: No limits for anchoring. For berthing, up to 32 ft. draft.

HEALTH: Quarantine Officer will board the vessel for the necessary inspection of all crew on board. Thereafter he issues pratique, if and when he finds that there is no disease or fever on board. The pratique is valid until after the vessel departs to a foreign port.

RADIO: Universal Telecommunication Service, the Capitol Radio Telecommunication, the Telefast Radio Communication, the Radio Communications of the Philippines and the Telecom, operated by the National Government for receiving and transmitting radio messages. Night and day services.

TUGS: The position where tugs normally join the vessel is in the stream and the usual ship's lines or tug's lines are used. There is no charge collected for the use of the tug's lines.

BERTHING: The Zamboanga Government wharf is about 800 ft. long with a depth at the latest survey of the following: East end 30 ft.; mid-section 25 ft. and West end 21 ft. There is a private wharf at Baliwasan and vessels of 15,000 g.r.t. can dock there with the following limitations: Draft forward must not exceed 32 ft.; draft aft must not exceed 36 ft., upon completion of loading. Vessels docking at this wharf can only be docked at *flood* tide (current running East to West) and can only be undocked in the same manner.

2 anchors must be used in berthing and vessels lay alongside the concrete pier port-side-to. This wharf in Baliwasan is for loading coconut oil and copra pellets only.

TANKERS: There are 4 oil depots at Gavilan Pt. and at Baliwasan. (Shell, Mobil, Esso and Caltex.) Max. tonnage of 4,000 gross with a draft of not more than 18 ft. can be moored for discharge.

STEVEDORES: The Master of the vessel shall wire to the local Agents of the vessel so that a contract could be made with the shipper to arrange gangs.

MEDICAL: It is necessary for Agents to receive advance notice of required medical attention. Hospital facilities are available at all times. Inoculations are also required by the Quarantine Officer upon boarding a vessel.

FRESH WATER: Fresh water can be obtained only at night-time due to low pressure. If there is no available space at the Zamboanga Pier the vessel has to wait at the anchorage for a berthing space to get water supply.

FUEL: Fuel, diesel, and crude oil available.

FIRE PRECAUTIONS: Smoking is entirely prohibited on board a tanker entering this port. The Master must advise all persons boarding his vessel.

DEVELOPMENTS: Improvements are carried out every year to the local wharf adding additional berths and dredging to increase draft.

GANGWAY/DECK WATCHMEN: The services of watchmen are necessary to foil looters from boarding the vessel.

OPENING/CLOSING HATCHES: Normally opening and closing of the hatches are done by the crew, and if the job is done by stevedores the vessel has to pay.

CUSTOMS ALLOWANCE: 200 cigarettes per man. Upon arrival in port the cigarettes are sealed in a bonded store by the Customs authorities, and can be opened only upon permission granted by the Collector of Customs.

IDENTIFICATION CARDS: All crew members to have identification cards for immediate identification in case of trouble while the crews are on shore.

CONSULS: None available.

REPATRIATION: Effecting crew changes and arranging necessary repatriation are carried out by the Immigration Office in the port with the assistance of the ship Agent and the foreign Embassy concerned.

AIRPORT: Distance from Zamboanga Pier to the airport is 3 km. Served by regular airlines. There is a daily flight from Zamboanga to Manila by Philippine airlines. Airport open to International flights.

TIME: Local Civil Time is 8 hours ahead of GMT. This time reckoning is constant throughout the year.

HOLIDAYS: Cargo work can be arranged with the Stevedoring Company through the shipper to work during holidays, including Sundays.

POLICE/AMBULANCE/FIRE: Police Department, tel. 06; Ambulance, Zamboanga General Hospital, tel. 08; and Fire Department, tel. 00.

TELEPHONES: Telephones cannot be installed on board when docked at the pier as is not allowed by the City Government.

SERVICES: Special services may be available, e.g. tank-cleaning equipment, facilities for discharge of tank-washings, compass adjusting, through representations to be made with the shipper or local Agent of the vessel.

AUTHORITY: The Collector of Customs.

NOTES

Please also advise Shipping Guides Ltd.

Poland

GDANSK: 54.21 N. 18.39 E. (See Plan Book)

ICE: Efforts made to keep port open all year round. Only in very severe winter are difficulties experienced.

DOCUMENTS:
12 Copies Cargo Manifest.
2 copies Bills of Lading.
Discharge Books to be collected for presentation.
Ship's Register.
Maritime Declaration of Health.
Ship's Articles/Crew List.
Deratisation Certificate or exemption from Sanitary Certificates, covering food cargoes and/or of animal origin, destined for discharge here.
Specification of Dangerous Cargo even if in transit.
2 Stowage Plans.

PILOTAGE: Compulsory. Boarding in Gdansk road. Gdansk Pilot station available on VHF, Channel No. 14.

ANCHORAGE: Gdansk roads up to buoys NP1, NP2. No tides.

RESTRICTIONS: Approaches 36 to 40 ft. depth.

MAX. SIZE: Max. size of vessels permitted to enter: draft, 33 ft. brackish water; Max. LOA 220 m. Also see "Tankers" and "Bulk Handling Facilities".

HEALTH: Maritime Declaration of Health to be presented on arrival. In the event of suspected disease, the vessel should wire to "Quarantine Gdandsk", or via Agents.

RADIO: Messages should be sent via Gdansk Radio.

RADAR/VHF: Port Radar Service acting with Pilot station, contactable on VHF Channel No. 14.

TUGS: Join in Gdansk roads. Vessel's lines must be used. Tugs compulsory for all vessels over 2,000 g.r.t.

BERTHING: Max. draft mentioned below is to be taken as normal water level. No tide.

Name of quay	*Length*	*Max. Draft*
King Wladyslaw IV Basin	1,190 m.	29 ft. 06 in.
Defenders of Westerplatte	1,442 m.	33 ft. 06 in.
Oliwskie	1,278 m.	31 ft. 00 in.
Defenders of Polish Post Office	330 m.	33 ft. 06 in.
Ziolkowski (Ro-Ro)	123 m.	20 ft. 00 in.
Iron Ore and Coal Quays	1,612 m.	32 ft. 02 in.
Administration Quay	80 m.	19 ft. 02 in.
20th Anniversary Quay	1,076 m.	32 ft. 00 in.
Timber Terminal	510 m.	25 ft. 09 in.
Chemist's Quay	250 m.	32 ft. 00 in.

CRANES: Floating cranes of 26–100 tons capacity. Many portal cranes up to 8 tons capacity.

BULK HANDLING FACILITIES: Bulk and liquid sulphur handled at Post Office Defenders Quay.

Coal/Ore quays equipped with 7×16-ton cranes and 10 ore bridges of 15 tons capacity. Grain elevator at Anniversary of the Republic Quay.

A conveyor system for fertilisers in bulk 20 ton grab cranes at Chemists Quay.

In the event of no accessible berth and/or grain elevator not being available, such bulk cargoes discharged by grabs. Vessels should be suitable for grab discharge.

North Port Bulk terminal: Coal-handling facilities capable of receiving vessels up to 100,000 d.w.t. max. daily loading rate 50,000 tons. Max. draft 49 ft. 03 in.

STEVEDORES: As gangs for the following day must be ordered before 1100 hrs., vessel's ETA should reach the Agents relevantly in advance.

Stevedores work 24 hours per day, which is considered to be between 2300 to 2300 hrs. following day. First shift from 2300 to 0700 hrs., second shift from 0700 to 1500 hrs., third shift from 1500 to 2300 hrs. Port works Sundays nd holidays at premium rates.

MEDICAL: No special notice required. Full hospital facilities available.

TANKERS: Oil Terminal at North Port.

Location: Southern part of the Gulf of Gdansk, Latitude 54° 21′ N. and Longitude 18° 40′ E. approximately. Vessels to use the roads between the end of peninsula Hel and anchorage South of Latitude 54° 25′ N., approximately 0.5 mile North of the terminal. Imports crude oil, exports fuel and refined oils, as well as other products of the Gdansk Refinery. No facilities for handling liquified gases.

Facilities: One L-shaped jetty for berthing consists of one main platform and four main dolphins, fitted with quick release hooks. The main platform is fitted with gangway tower and seven movable handling arms for loading and discharging purposes. Only one mooring place available. The jetty accessible for vessels having minimum 260 ft. (about 35,000 d.w.t.) and maximum 1,000 ft. length and 49 ft. draft. For towing purposes there are available two 2,500 h.p. and two 1,650 h.p. diesel tugs, if necessary further 1,200 h.p. tugs are at hand. All tugs equipped with fire fighting equipment.

Cargo Handling Equipment: The seven mobile handling arms, Luceat Production, are used as follows: No. 2, 3 and 4 for discharging of crude oil, speed about 10,000 cu.m/hr. No. 1 and 5 for loading bunker oil and water, efficiency about 2,000 cu.m./hr. No. 6 and 7 loading liquid fuels and refined products 2,000–2,500 cu.m./hr. Loading pressure of vessels pumps should not exceed 14.5 kg./sq.cm. at any time.

For the time being, as terminal is still under construction, no facilities for handling of vessels ballast water available.

Services: Marine diesel and fuel oil available at the jetty. Storage tanks located in the neighbourhood of the terminal and connected with central pipe-line system of Poland. Laboratory, for testing purposes and repairing facilities available.

DENSITY: Salt content: 0.54%

FRESH WATER: Available at hydrants.

FUEL: Heavy, intermediate and thin fuels, marine diesel oils and gas oils available ex-shore installation or lighter. 48 hours notice required.

GANGWAY/DECK WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: Normally carried out by stevedores, crew allowed to handle.

CERTIFICATES:
Load Line Certificate.
Cargo Gear Certificates.

CUSTOMS ALLOWANCE: For 3 days – 160 cigarettes or 30 cigars or 150 gm. tobacco per crew member. Master is allowed double ration. 1 bottle wine and 1 bottle of spirits per crew member for each 3 days. Master is allowed double ration.

IDENTIFICATION CARDS: Each member must be in possession of a valid Discharge Book/Sailor's Book, and will receive a separate shore permit issued by the Immigration Authorities, entitling him to go ashore within the area of Gdynia/Sopot/Gdansk.

CONSULS:
Chinese People's Republic Consulate General, tel. 41-64-76.
German Democratic Republic Consulate General, tel. 41-43-66.
Soviet Consulate General, tel. 41-06-13.

REPAIRS: All types of deck and engine repairs performed by specialised ship repair yard.

Floating docks: No. 1, 6,400 tons lifting capacity, dim. 135×25.20 m. No. 2, 8,000 tons lifting capacity, dim. 156×27.20 m. No. 3, 11,000 tons lifting capacity, dim. 176×28.00 m. 1 floating jack of 1,700 tons capacity and 3 minor docking pontoons.

REPATRIATION: Crew change and repatriation can be arranged.

AIRPORT: Gdansk Airport.

TIME: Middle European Time, which is 1 hour ahead of GMT throughout the year.

HOLIDAYS: New Year's Day (January 1st); Easter Sunday (movable); Easter Monday (movable); Labour Day (May 1st); Corpus Christi (movable); National Holiday (July 22nd); All Saints' Day (November 1st); St. Barbara, only for workers loading coal. (December 4th); Christmas Day (December 25th); Second Christmas Day (December 26th). On Christmas Eve and New Year's Eve, work is generally suspended at 1500 hrs. In justified and approved cases, overtime on Sundays and holidays is arrangeable.

TELEPHONES: Available on most general cargo quays.

GENERAL: Cargo is handled around the clock in 3 shifts of 8 hours each. Saturdays are full working days. Sunday and holiday interruptions last from 2300 on Saturdays or days before holidays, and terminate at 2300 on Sundays or holidays.

POLICE/FIRE/AMBULANCE: Police: Gdansk-Nowy Port, Wladyslawa IV-3, tel. 31-48-61; Ambulance: Gdansk-Wrzeszcs, Al. Zwyciestwa 49, tel. 41-10-00; Fire: Gdansk-Nowy Port, Na Zaspy 57, alarm phone tel. 41-22-22.

AUTHORITY: The Port of Gdansk Authority.

AGENT: Morska Agencja, Harbour Office Gdansk, Oliwska 35 – Gdansk-Nowy Port. Tel. 430-921 (day and night service). Telex: 051-641.

GDYNIA: 54.32 N. 18.34 E. (See Plan Book)

ICE: Efforts made to keep port open all year round. Only in very severe Winter are any difficulties experienced.

DOCUMENTS:
10 copies Cargo Manifest.
2 copies B/Lading.
Discharge Books to be collected for presentation.
Ship's Register.
Ship's Articles/Crew List.
Maritime Declaration of Health.
Deratisation Certificate.
Sanitary Certificates covering food cargoes and/or of animal origin, destined for discharge here.
Specification of Dangerous Cargo (even if in transit).
2 Stowage Plans.

PILOTAGE: Compulsory. Boarding in Gdynia Roads. Gdynia Pilot station available on VHF in Channel No. 12. Traffic around the clock.

ANCHORAGE: Gydnia Roads at buoy GD, up to 200-500 m. off port entrance. No tides.

RESTRICTIONS: Depth in main entrance 46 ft.

MAX. SIZE: No limit on length, max. draft 37 ft. 04 in. at French Quay, also see "Berthing".

HEALTH: Maritime Declaration of Health to be presented on arrival. In the event of suspected disease the vessel should wire "Quarantine Gdynia" or via Agents.

RADIO: Message should be sent via Gdynia Radio. Port Radar Service acting with the Pilot station, contactable on VHF, Channel No. 12, Gdynia. Contact Agent VHF Channel 7.

TUGS: Join vessel in Gdynia Roads. Vessel's lines must be used.

BERTHING: Max. draft is at normal water depth.

Name	*Length*	*Max. Draft*
Pomeranian Quay	629 m.	27 ft. 11 in.
Silesian Quay	434 m.	26 ft. 11 in.
Swedish Quay	715 m.	30 ft. 06 in.
Danish Quay	562 m.	26 ft. 11 in.
Dutch Quay	397 m.	33 ft. 06 in.
Finnish Quay	190 m.	32 ft. 02 in.
Polish Quay	1,130 m.	29 ft. 03 in. –34 ft. 09 in.
Rotterdam Quay	310 m.	28 ft. 03 in.
Indian Quay	1,018 m.	30 ft. 02 in. –32 ft. 02 in.
Peace Fighters Quay	817 m.	30 ft. 02 in.
Czechoslovakian Quay	214 m.	28 ft. 03 in.
Romanian Quay	864 m.	31 ft. 06 in.
Hungarian Quay	215 m.	33 ft. 02 in.
French Quay (passenger terminal)	510 m.	37 ft. 04 in.
Wenda Quay	80 m.	27 ft. 03 in.
Yugoslavian Quay	183 m.	32 ft. 02 in.

CRANES: Floating cranes of 26–100 tons capacity and many portal cranes up to 8 tons capacity. Also available cranes of 11.5, 15 and 16 tons capacity. Mobile cranes 12.5–35 tons available.

BULK HANDLING FACILITIES: Container terminal at Polish Quay equipped with 2×40-ton multi-purpose cranes.

Grain elevator at Indian Quay. A special terminal at the same quay for handling aluminium oxide in bulk, through floating elevators.

Bulk cargoes handled by grabs at other quays.

4 floating elevators available. 2×320 t.p.h. and 2×100 t.p.h.

STEVEDORES: Gangs for the next day must be ordered by 1100 hrs., vessel's ETA should reach the Agents relevantly in advance.

MEDICAL: No special notice required. Full hospital facilities available.

TANKERS: Berth in No. 3 basin. up to 35,000 d.w.t., brackish water.

DENSITY: Salt content: 0.73%.

FRESH WATER: Available ex-hydrants.

FUEL: Heavy, intermediate and thin fuels, marine diesel oils and gas oils available ex-shore installation or lighter. 48 hours notice required.

GANGWAY/DECK WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: Opening/closing hatches normally carried out by stevedores, but crew allowed to handle.

CERTIFICATES:

Load Line Certificate.
Cargo Gear Certificates.

CUSTOMS ALLOWANCE: For each 3 days – 160 cigarettes or 30 cigars or 150 g. of tobacco per Crew member. Master is allowed double ration. 1 bottle wine and 1 bottle spirits per Crew member for each 3 days. Master is allowed double ration.

IDENTIFICATION CARDS: Each member must be in possession of a valid Discharge Book and will receive a separate shore permit issued by the Immigration Authorities entitling him to go ashore within the area of Gydnia–Sopot–Gdansk.

CONSULS:

Belgian V. Consulate	tel. 20–39–83
Brazilian V. Consulate	tel. 21–61–31
Dutch Consulate	tel. 20–06–85
Finnish Consulate	tel. 51–50–52
Italian V. Consulate	tel. 21–51–15

REPAIRS: All types of deck and engine repairs performed by specialised ship repair yard. Container repairs undertaken.

DRY DOCKS: 2 floating docks of a lifting capacity of 3,500 and 1,200 tons. 12 slipways of 150 tons lifting capacity each.

REPATRIATION: Crew change and repatriation arrangeable.

AIRPORT: Gdansk Airport, situated 20 km. from Gdynia.

TIME: Middle European Time, which is 1 hour ahead of GMT, kept throughout the year.

HOLIDAYS: New Year's Day (January 1st); Easter Sunday (movable); Easter Monday (movable); Labour Day (May 1st); Corpus Christi (movable); National Holiday (July 22nd); All Saints' Day (November 1st); St. Barbara (only for workers loading coal) (December 4th); Christmas Day (December 25th); Second Christmas Day (December 26th). On Christmas Eve and New Year's Eve work is generally suspended at 1500 hrs. In justified and approved cases overtime on Sundays and holidays is arrangeable.

POLICE/FIRE/AMBULANCE: Police: Gdynia, Chrzanowskiego 6, tel. 21–61–12; Ambulance: Gdynia, Zwirki i Wigury 14, tel. 20–00–02; Fire: Gdynia, Chrzanowskiego 17, Alarm 20–68–86.

TELEPHONES: Available on most general cargo quays.

GENERAL: Cargo is handled around the clock in 3 shifts of 8 hours each. Saturdays are full working days. Sunday and holiday interruptions last from 2300 hrs. on Saturdays or days before holidays and terminate at 2300 hrs. on Sundays or holidays.

DEVELOPMENTS: Container terminal at Helsinki Quay will be operational 1979–80.

Ro/Ro berth at Danish Quay will be operational 1979-80.

Ro/Ro berth at Rotterdam Quay will be operational in 1979.

AUTHORITY: Port of Gdynia Authority.

AGENTS: Morska Agencja, *Head Office*, Pulaskiego 8 – Gdynia. Tel. 21–49–51 (9 lines) – working from 0730 to 1530 hrs. Telex: 054–301. Cables: "MAG Gdynia".

Harbour Office Gdynia, Rotterdamska 3 – Gdynia. Tel. 20–37–04 (day and night service). Telex: 054–376.

SZCZECIN: 53.25 N. 14.32 E. Including Swinoujscie, 53.55 N. 14.15 E. (See Plan Book)

DOCUMENTS:

12 copies of Cargo Manifests.
2 copies B/Lading.
Tonnage Certificate.
4 copies of Crew List.
Passenger List.
Maritime Declaration of Health.
Provision List.
Deratisation Certificate.
Sanitary Certificate covering food, cargoes and/or of animal origin destined for discharge here.
Specification of Dangerous Cargo (even if in transit).
2 copies Stowage Plans.

PILOTAGE: Contact pilot station, VHF Channel 12, Working. Channel 26 or 27, call sign Polbroker. Light and sound signals used according to international rules. The Pilot is taken on board at the anchorage. Pilot compulsory.

MAX. SIZE: Max. draft at Swinoujscie, 42 ft.; max. draft at Szczecin, 28 ft.; max. length at Swinoujscie, 250 m.; max. length at Szczecin, 200 m.

HEALTH: All ships arriving Szczecin from South of Cap Finistere are subject to sanitary inspection.

RADIO: Szczecin Radio, SPE 2182 mHz. Medium frequencies.

TUGS: For ships over 1,500 g.r.t., 1 tug compulsory. Over 3,000 g.r.t., two tugs compulsory. Normally tugs join the vessel at the limits of the port of Szczecin to Kra quay.

BERTHING: Swinoujscie: *Dockers Quay:* quay length 215 m., depth alongside 11.20 m. This quay is for bulk cargoes. Storage space is available. 7-10 ton cranes.

Miner's Quay: Quay length 360 m., depth alongside 12.80 m. Suitable for ships of 35,000 to 65,000 d.w.t. There is a modern coal handling installation with a capacity of 33,000 tons per day and coal storage of over 440,000 metric tons, fully mechanised.

King Wladyslaw IV Quay: Quay length 190 m., depth alongside 9.45 m. This quay is for lighterage and part unloading.

Chemist Quay: Quay length 375 m., depth alongside 11.60 m. This quay is for bulk fertiliser.

Szczecin:

Quay	*Length*	*Depth alongside*
Katowickie	434 m.	8.5 m.
Chorzowskie	290 m.	8.5 m.
Gliwickie	260 m.	8.5 m.
Bytomskie	330 m.	8.5 m.
Coal Conveyors Jetty	320 m.	8.5 m.
Walbrzyskie	263 m.	8.5 m.
Gornoslaskie	282 m.	8.5 m.
Noteckie	315 m.	6.1 m.
Sosnowieckie	100 m.	6.4 m.
Parnica	300 m.	5.8 m.
Czechoslovakian	950 m.	8.5 m.
Grain	200 m.	8.5 m.
Rumanian	600 m.	7.9 m.
Hungarian	612 m.	7.9 m.
Greek	630 m.	5.8 m.
Soviet Union	323 m.	4.9 m.
Albanian	89 m.	7.0 m.
Turkish	104 m.	3.9 m.
Starowka	537 m.	5.8 m.
Huk	267 m.	6.4 m.
Regalica	210 m.	5.5 m.
Bydgoskie	110 m.	4.8 m.
Poznanskie	65 m.	4.8 m.
Jugoslavian	100 m.	5.4 m.
Polish	260 m.	8.5 m.

BULK HANDLING FACILITIES: Coal conveyor belts with loading capacity 800 t.p.h.

2 grain elevators capacity 50,000 tons.

At Swinoujscie, 2 automatic conveyors for coal capacity 2,000 t.p.h.

STEVEDORES: 24 hours ETA required to arrange gangs.

MEDICAL: Doctors and hospital facilities available.

TANKERS: Max. draft at Swinoujscie, 34 ft.; max. draft at Szczecin, 21 ft. All empty tankers have to give 24 hours ETA advice whether they are gasfree and name of last cargo carried. No residue discharge facilities.

DENSITY: 1000.

FRESH WATER: Available from water boat, or directly from a quay hydrant. For deliveries of less than 5 tons, the minimum charge is as for 5 tons of water. For the supply of water on Sundays and holidays a surcharge of 25% to be levied.

FUEL: All grades of Shell fuel oil and Castrol marine lubricants.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: Normally opened by crew.

CUSTOMS ALLOWANCE: Each man -160 cigarettes and 1 bottle of spirit. Master allowed double.

CARGO GEAR: No additional requirements; all gear supplied by stevedores except rain tents.

IDENTIFICATION CARDS: Each member must be in possession of a valid Discharge Book and will receive a separate shore permit issued by the Immigration Authorities entitling him to go ashore within the city area.

CONSULS: Swedish Consulate, Soviet Union Consulate, Czechoslovak Consulate, German D.R. Consulate and Cuban Consulate.

REPAIRS: All types of deck and engine repairs. 2 ship repair yards.
DRY DOCKS: Floating docks with lifting capacity of 8,200 tons 5,500 tons 3×1700 tons, 650 tons.
REPATRIATION: Crew changes and arranging repatriation can be done.
AIRPORT: 45 km. from Szczecin. Regular flights to Warsaw. From Warsaw communication to every main airport in Europe.
TIME: GMT plus 1 hour; no alterations.
HOLIDAYS: New Year's Day (January 1st); Easter Monday; Labour Day (May 1st); Victory Day (May 9th.); Corpus Christi; National Holiday (July 22nd); All Saint's Day (November 1st); Christmas Day (December 25th); Boxing Day (December 26th).

On Christmas Eve and New Year's Eve work is generally suspended at 1500 hrs. In justified and approved cases overtime on Sundays and holidays is arrangeable.
POLICE/FIRE/AMBULANCE: Police, 997; Ambulance, 999; Fire Brigade, 998.
SHORE LEAVE: Allowed.
AUTHORITY: Harbour Master, Sea Ports Complex Szczecin and Swinoujscie.

AGENT: Morska Agencja w Szczecinie, 4 Batorego Square POB 70-207, Szczecin, Tel. 46948, 45235, Telex: 0422147, 0422148, 0422149.

Harbour Office at Szczecin – day and night service tel. 39113, 89742, Telex: 0422235.

Harbour Office at Swinoujscie – tel. 3821. Telex: 0422330.

NOTES

Please also advise Shipping Guides Ltd.

Portugal

AVEIRO: 40.39 N. 08.45 W.

PORT LIMITS: A vessel is considered "arrived" when she is 2 miles from the roads entrance.

DOCUMENTS: Health Certificate.
5 Crew Lists.
4 Lists of Passengers Disembarked.
2 Lists of Passengers in Transit.
5 Cargo Manifests.
1 Manifest of Cargo in Transit.
1 Provision List and Spares.

PILOTAGE: Send ETA to Agent by cable, 24 hours before arrival. Entrance depending on sea conditions and ship's draft. Contact Aveiro Pilots frequency 2182 and listen on frequency 2132 on the following periods: 0905/0915, 1105/1115, 1505/1515, 1705/1715 hrs. local time.

Pilots can be contacted by VHF Channel 16 during the same periods.

Pilot boat displays white flag, surrounded by narrow blue stripe, with black "P" in the centre. Pilot to be taken on board about 1 mile West of harbour entrance; vessel awaiting Pilot can anchor there, if weather permits.

Pilot station, located close to Aveiro lighthouse, hoists black cylinder on signal mast when entry not possible due to bad weather or any abnormal cause. Pilot boat has radar that can assist vessels during approach to harbour entrance.

ANCHORAGES: Anchor W. of North Pier, at a distance of more than 0.75 mile.

RESTRICTIONS: Subject tide and bar conditions. Entering and sailing only during daylight.

MAX. SIZE: Max. draft between 16 to 18 ft. dependent on tide. Max. length 90 m.

HEALTH: Free pratique automatic for vessels coming from other Portuguese and Continental ports. Vessels coming from other countries; Health Certificate must be delivered to Agent.

RADIO: Call Aveiro Pilots during the hours above indicated, under "Pilotage". Radio station is Lisboa Radio.

TUGS: 2 tugs. 1 of 200 h.p. and 1 of 500 h.p.

BERTHING: A quay with 1,300 ft. length for handling general cargo; 10 gangways in concrete for ocean fishing boats; 4 electrical cranes of 3, 6 and 12 tons and 11 mobile cranes for cargo-handling up to 8 tons.

SPECIALISED CARGO-HANDLING FACILITIES: A terminal for handling wine, chemicals and turpentine, another for handling liquid combustibles and chemicals.

STEVEDORES: Advise Agent 24 hours before vessel's arrival.

MEDICAL: Hospital and clinics in town. Advance notice not required. Required vaccination certificate, and when ship comes from affected regions, also yellow fever certificate.

TANKERS: Private quay of SACOR used by small-sized tankers.

DENSITY: About 1028.

FRESH WATER: Supplied by barges or tank-car or water net system. 20 t.p.h.

FUEL: Only diesel available. Smaller quantities supplied from trucks. Otherwise, from SACOR's private quay (pipe-line).

DEVELOPMENTS: Dredging harbour entrance.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: Work usually done by crew.

CUSTOMS ALLOWANCE: 125 grams tobacco, and 1 bottle wine/spirits for each man.

CREW IDENTIFICATION CARDS: Crew members going ashore will need a special card issued by State Police. Ship's agent takes these cards aboard, where they are filled in accordance with crew list. See "Lisbon".

CONSULS: Nearest Oporto, 60 km.

REPAIRS: All repairs can be carried out.

DRY DOCKS: 1 Drydock (100 m.×18 m.) for vessels up to 3,000 d.w.t. and 1 floating dock for vessels up to 1,200 d.w.t.

REPATRIATION: No difficulties for crew repatriations.

AIRPORT: Pedras Rubras (Oporto Airport) at about 60 km., with 2 flights per day to Lisbon and 1 flight per week to London.

Lisbon Airport at 250 km. is served by regular airlines covering all the world.

TIME: From 1st October to 1st April – GMT. From 1st April to 1st October – GMT plus 1 hour.

HOLIDAYS: New Year's Day; Liberty's Day (25th April); Portugal's Day (10th June); Workers' Day (1st May); 16th May (Municipal holiday); Corpus Christi (movable); Proclamation of the Republic (5th Oct.); All Saint's Day (1st Nov.); Independence of Portugal (1st Dec.); Immaculate Conception (8th Dec.); Christmas Day. No work allowed on Christmas Day and New Year's Day.

POLICE/FIRE/AMBULANCE: Police 22022; Ambulance 115; Fire 22333.

TELEPHONES: None available on board.

SHORE-LEAVE: Crew allowed ashore.

DELAYS: As a tidal port, arrivals respectively sailings subject tides. Delays may occur owing to bad weather especially the Winter months.

AUTHORITY: Capitania do porto de Aveiro. Junta Autonoma do Porto de Aveiro.

AGENTS: A. J. Goncalves de Moraes, Lda, 49 Av. Dr. Lourenco Peixinho, Aveiro. Tel. 24550. Telex 22690. Cables: Amoras. After hours Tel. 24666. Shipping and Forwarding Agents, Chartering and Brokers, Insurance Agents, Stevedoring.

FIGUEIRA DA FOZ: 40.09 N. 08.52 W.

DOCUMENTS:
Health Certificate (the Pilot supplies form).
5 Crew Lists.
4 Lists of Passengers Disembarking.
2 Lists of Passengers in Transit.
5 Cargo Manifests.
1 Manifest of Cargo in Transit.
Provision and Spares List.
2 copies each Bill of Lading.

PILOTAGE: Compulsory. Send ETA to Agent by cable 24 hours before arrival. Convenient try arrive 1 hour before high tide. Call Figueira-Pesca frequency 2182 and listen on frequency 1785 or 1834. Await Pilot 0.5 mile from the piers. VHF Channel 16 is being used experimentally.

ANCHORAGES: South of N.W. Azimuth of North Pier, at a distance of more than 0.5 mile.

RESTRICTIONS: No services during night.

MAX. SIZE: Max. draft 12 ft. Max. length 65 m.

HEALTH: Free pratique authorised for vessels coming from other Portugese Continental ports. For vessels coming from other countries, Health Declaration supplied by the Pilot must be filled in.

RADIO: Figueira — Pesca listens on 2182 Khz permanently, except between 1900 hrs. (on Saturday) till 0100 hrs. (On Monday).

TUGS: 2 tugs available, 200 h.p. and 120 h.p.

BERTHING: The port is in the mouth of the Mondego River. The anchorage is on sand and outside the harbour.

Concrete Quay: Length 360 m. Depth 6 m. Cranage: 3 electric – 2×6 ton at 20 m. and 1×3 ton at 16 m. 4 mobile – 1×1.8 ton at 12 m. and 3×1.5 ton at 8 m.

Wood Quay: Length 140 m. Depth 3 m. Cranage: 1×6 ton crane.

Tidal Harbour: Water area 6 ha. Length of quayage 600 m.

Depths on Bar: M.H.W.S.T. 3.8 m. M.H.W.N.T. 3.00 m.

There is about 320 m. of quayage for small ships and fishing craft.

STEVEDORES: Advise agent 24 hours before arrival.

MEDICAL: No prior advice is necessary. All medical facilities available.

DENSITY: About 1028.

FRESH WATER: Each quay has its own installations.

FUEL: Only diesel available.

DEVELOPMENT: Dredging in progress.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: Work usually done by crew.

CUSTOMS ALLOWANCE: No limit, but must be declared.

IDENTIFICATION CARDS: See "Lisbon".

CONSULS: France, Spain and Great Britain.

REPAIRS: There is a shipyard and repair facilities, also a shipway for ships up to 4,000 tons.

REPATRIATION: No difficulty in crew repatriations.

TIME: From last Sunday in September till last Sunday in March (GMT) and the rest of the year GMT plus 1 hour.

HOLIDAYS: New Year's Day; Good Friday; 25th April; 1st May; Corpus Christi (movable); 10th June; 15th August; 5th October; All Saint's Day (1st November); 1st December; 8th December; 24th December; 25th December.

Also holiday on 24th June.

POLICE/FIRE/AMBULANCE: Police 22022; Ambulance 22122; Fire 22122.

SHORE LEAVE: Crew allowed ashore.

DELAYS: As a tidal port, arrivals and sailings subject tides. Delays may occur owing to bad weather especially during Winter months.

AGENTS: A. J. Goncalves de Moraes, Lda., 262-Rua da Republica, Figueira da Foz — Portugal. Tel. 22584. Telex: 13207. Cables: Amoras. After office hours: 25016 and 24666 ("Aveiro" network). Shipping and Forwarding Agents, Chartering and Brokers, Insurance Agents, Stevedoring.

LEIXOES and OPORTO (Douro River):

(See Plan Book)

Leixoes: 41.11 N. 08.43 W. Oporto: 41.09 N. 08.37 W.

DOCUMENTS:
Health Certificate.
5 Crew Lists.
Provision List — ship and individual.
Tobacco Declaration and Entrance Forms supplied by Agent on arrival.
5 Manifests and 2 copies of each B/L concerning cargo to be discharged.
1 Transit Manifest if cargo in transit exists.

PILOTAGE: Available day and night in Leixoes, but in Oporto only between sunrise and sunset, and then dependent upon sea conditions. Vessels must communicate their ETA a minimum of 12 hours ahead and confirm again 4 hours in advance. Departures must be communicated 2 hours ahead between 0800 and 1800 hrs. This must be done via the Radar Station.

Pilot boat recognition:

By day – black hull, with the letter "P" painted in white. Also a flag may be hoisted which is white, lined in blue, and with a black letter "P" in the centre.

By night – a white light at the top of the mast forward and lower down a red light.

Call-up signals by ship's siren:

To call Pilot – Letter "G" in morse, or Letter "O".

To call pilot launch – Letter "O" in morse.

ANCHORAGES: Leixoes in the roads or outer-harbour. Douro in the roads or river.

RESTRICTIONS: Douro: subject tide and bar conditions.

MAX. SIZE: Douro River: Max. draft 14 ft. and length about 60 m. subject to Bar and weather conditions.

Leixoes: Can accommodate tankers up to 52 ft. (However this may be reduced until a wreck has been removed, also max. LOA 200 m. until wreck removed) and cargo ships of 31 ft.

HEALTH: Free pratique authorised for vessels coming from other Portuguese Continental Ports. For vessels coming from other countries Health Declaration supplied by the Pilot must be filled in, and delivered to the Agent.

RADIO: Leixoes Naval Radio Station listens 2182 kHz and works on 2182, 2097, 2566, 2657, 4474.5 and 7510 kHz, or through Lisbon Radio Station.

RADAR/VHF: Estacao da Radar de Leixoes, Contacts radar/VHF. Range 50 miles. Channel 16, 13, 12 and 29.

TUGS: Normally join the vessel: *At Leixoes:* 6 tugs, 875–2,800 h.p. In the outer harbour up to 700 g.r.t., no tug required; from 700 up to 1,800 g.r.t. 1 tug compulsory. Over 1,800 g.r.t., 2 or more tugs required.

At Douro River: as a rule service necessary on arrival/sailings. Thus join the vessel after passing the bar.

BERTHING *Outer Harbour:* The depth of water at the entrance and in the centre of the outer harbour is 10.00 m. at MLWST; Maximum rise of tides 3.99 m.; Minimum rise of tides 0.07 m.; Total water area 117.36 ha.; Breadth of entrance (harbour) 220.05 m.; Breadth of entrance (Dock No. 1) 113.00 m.

Dock No. 1: Length of North Quay 487 m.; South Quay 551 m.; Maximum draft 29 ft.

Dock No. 2: Length of North Quay 670 m. and South Quay 743 m.; Maximum draft 30 ft.

South Mole: Length of Quay 370 m.; Maximum draft 22 ft.

Dock No. 2 South Container Terminal: This facility has a quay length of 125 m. with a depth of water alongside of 30 ft. There is a total area of 5.5 hectares (13.59 acres) of which 4.5 hectares (11.12 acres) are used for container marshalling and storage. It is equipped with one 30-ton Liebherr container gantry crane with an outreach of 24.38 m. (80 ft.), four 30-ton Karricon 3043 straddle-carriers, capable of stacking three high, two 35-ton side-loaders, capable of stacking two high, and two 12-ton container transporters.

CRANES: *Dock No. 1:* One 94-ton crane, two 5-ton cranes, eight 3-ton cranes and one 15-ton crane.

Dock No. 2: Two 15-ton cranes and thirty-one 5-ton cranes.

South Mole: Six 5-ton and one 2.5-ton crane.

BRIDGES: Bridge at Leixoes between Dock 1 and Dock 2 opening regularly.

STEVEDORES: Ordered by Agents according berth and cargo.

MEDICAL: Masters to advise by radio prior to arrival if medical attendance is required on board. Hospital facilities available.

TANKERS: *Berth A:* This is outside the outer harbour; depth of water 17.00 m.; deadweight capacity 120,000 tons. Max. draft 52 ft. Also see "Max. Size".

Berth B; This is within the outer harbour; depth of water 9.70 m.; deadweight capacity 27,000 tons. Max. draft 29 ft.

Berth C: Located within the outer harbour; depth of water 5.70 m.; deadweight capacity 5,000 tons. Max. draft 17 ft.

DENSITY: 1026.

OPENING/CLOSING HATCHES: Work always done by crew.

CERTIFICATES: Ship register.

Safety Radio.

Safety Equipment.

Load Line and Derating Certificates.

IDENTIFICATION CARDS: See Lisbon.

CONSULS:

Austria	Tel.	312328	Holland	Tel.	24867
Belgium	,,	25956	Italy	,,	26243
Brazil	,,	24463	Japan*	,,	690961
Chile	,,	28421	Mexico	,,	54151
Colombia	,,	22037	Nicaragua	,,	29731
Denmark*	,,	933655	Norway	,,	27243
Dominica	,,	21938	Peru	,,	23435
Ecuador	,,	16753	Spain	,,	25213
France	,,	23349	Sweden	,,	27243
Germany	,,	65132	South Africa	,,	22277
Great Britain	,,	684789	Turkey	,,	64547
Greece	,,	22277	*On the coast.		

REPAIRS: All types of deck engine and electrical repairs can be carried out.

DRY DOCKS: Only small dry docks available for fishing-boats.

REPATRIATION: No difficulties for crew changes or repatriations.

AIRPORT: Distances: Oporto 17 km., Leixoes 7 km. Airport served twice a day through Lisbon Airport.

TIME: GMT plus 1 hour and no alterations during the year.

HOLIDAYS: New Year's Day; Good Friday; 25th April; Labour Day; Portugal's Day (10th June); Corpus Christi (movable); Ascension Day (15th August); Proclamation of the Republic (Oct. 5th); All Saints' Day (Nov. 1st); Independence of Portugal (Dec. 1st); Immaculate Conception (Dec. 8th); Christmas Day.

POLICE/AMBULANCE/FIRE: Leixoes Police 9951706; Oporto Police 28266; Ambulance 115; Fire Brigade Oporto 484121, Leixoes 930018 or 932701.

TELEPHONES: Only available on certain quays.

SERVICES: Limited tank-cleaning may be performed. Discharge of tank washings subject port authorisation. Compass adjusting possible. Diver service available.

SHORE LEAVE: Crew allowed ashore.

DEVELOPMENTS: *Oporto:* The Douro Bar to be dredged during 1978.

Leixoes: Construction of No. 4 Dock. Length 503 m. (North side) and 544 m. (South Side). Width 120 m. Depth 12 m.

Surfacing and draining of open sea area North of No. 4 Dock.

Construction of Container Terminal with 2 quays. 1 quay – length 360 m., depth 10 m. for vessels up to 25,000 d.w.t. and equipped with 2 gantry cranes of 35 ton capacity. Second quay – length 145 m., depth 6 m. for vessels up to 5,000 d.w.t. which may be converted for Ro/Ro traffic if justified. Open areas adjacent to the quays will cover 6 hectares.

Routine dredging of the docks, Douro Bar and manoeuvring area and approaches to Tanker Berth "A".

AUTHORITY: Administracao dos Portos do Douro e Leixoes.

AGENTS: A. J. Goncalves de Moraes, Lda., Rua da Nova Alfandega, 18 — POB 185 — Porto, Portugal. Tel. 28741 (14 lines) Telex: 2-23811, 2-22420. After office hours; 9620694. Cables: Amoras. Shipping and Forwarding Agents, Chartering and Brokers, Insurance Agents, Stevedoring.

LISBON: 38.43 N. 09.11 W. (See Plan Book)

PORT LIMITS: A vessel is considered to be an "arrived vessel" when, after entering the Tagus Estuary, she has left behind the alignment between the Torre of S Juliao and the Torre of Bugio.

DOCUMENTS:

Health Certificate.

6 Crew Lists.

10 Passenger Lists.

2 Lists of Articles held by the crew: cameras, binoculars, radios, cigarettes, spirits, etc.

2 Stores Lists.

All to be signed by ship's Master.

Certificates for vessels up to 500 tons: – tonnage register, loading and navigation certificates. For vessels over 500 tons: – tonnage register; loadline; radio; safety equipment and navigation certificates.

Cargo Documents:

10 Manifests.

3 sets of Bills of Lading.

For cargo in transit: 2 Manifests.

PILOTAGE: Compulsory. Pilot boat anchored outside the river at Cascais Bay, day and night, but Pilot can also board vessel inside the river at Belem Station.

Pilots are to be requested not less than 6 hours or more than 24 hours prior to the ship's arrival, by a radiogram addressed to "Pilotos Lisboa", or by a radio call direct to the pilot boat stating ship's name, estimated time arrival at the pilotage area, the station where ship wants to take Pilot, and vessel's draft. Any vessel failing to correct her ETA or arriving more than 2 hours after her ETA may have to wait at Cascais before a Pilot is available to board.

Pilots can be contacted by VHF Channels 13 and 16, on permanent watch, and by radio-telephone 2182 kHz.

MAX. SIZE: Depth alongside piers varying between 15 and 34 ft.

HEALTH: Ordinary visit made at central area with vessel anchored, from 0800 hrs. to sunset. Master may ask for free pratique to get ship moored immediately on arrival. For this, necessary to cable the Health Authorities, addressing cable as follows: Estacao Maritima de Lisboa, Rocha do Conde de Obidos, max./min. respectively 15/6 hours prior to the ship's arrival. Text of cable: "ship's name, nationality, code (MIBDU), day and time of arrival" signed by the Master.

RADIO: ETA to be advised by Master, to Agent, 24 and 12 hours before ship's arrival. Lisboa Radio: call sign CUL, medium and short waves by code 720, 22, 24. By VHF Channels 5, 9, 21, 16 and 19.

BERTHING: Subject to berth availability.

SPECIALISED CARGO-HANDLING FACILITIES: *Container Terminal* at Santa Apolonia equipped with two portainers of 30 tons each, side loaders, semi trailers, tractors, etc., depth 8.5 m.

Roll-on/roll-off Terminal at Alcantara for ferry boats and cargo.

Grain Elevators and Silos at Poco do Bispo operated by Instituto dos Cereois. Unloading by elevator up to 400 t.p.h.

Ore Terminal: At Barreiro there is a terminal for unloading ore from railway wagons to lighters, intended for carrying ore, in particular, to the national steel works (Siderurgia Nacional).

Cement Storage Terminal: This is at Poco do Bispo and is operated by Secil.

STEVEDORES: Ordered by Agents according berth and cargo.

MEDICAL: Masters to advise by radio prior arrival if medical attendance required on board. Hospital facilities available.

TANKERS: Shell and Petrogal berths exposed to 9 knots HWST current. Essential to use good new mooring lines.

Cabo Ruivo Terminal: This is operated, on a concession basis, by Soponata and has depths of 11 m., capable of mooring tankers up to 65,000 d.w.t. alongside its jetty.

Fuel Oil Facilities: The port of Lisbon fuel oil installations belong to private companies and are concentrated along both banks of the Tagus at the following points:

Sacavem and Cabo Ruivo (with oil refinery facilities), Montijo, Barreiro, Santa Iria, Porto Brandao, Porto dos Buchos.

DENSITY: 1025.

FRESH WATER: Usually supplied by barge unless vessel lying alongside a pier where water provided.

FUEL: Shell, Esso, Petrogal. These companies can supply through their own barges or alongside their private bunkering stations on pier.

IDENTIFICATION CARDS: Crew members going ashore will need a special yellow card issued by Agent and stamped with police visa. The cards are supplied by Agent to be completed on board in accordance with crew list particulars. With these shore passes Crew members may circulate between Lisbon and Cascais, and Lisbon and Sintra.

Master and/or Owners will be fined Esc. $1,000 for any Crew member found ashore without that card. A double fine will be imposed in case of recurrence.

Similar cards, but white, are required for passengers in transit.

CONSULS: Practically all countries are represented in Lisbon.

REPAIRS: There are several repair work-shops. The biggest is Lisnave Shipyard with several docks, one for vessels up to 300,000 tons and a new dock where vessels up to 1,000,000 tons can be repaired.

AIRPORT: Within the Lisbon area. Regular International services.

REPATRIATION: No difficulties for crew changes or repatriation.

POLICE/AMBULANCE/FIRE: Maritime Police 608104; Ambulance 115; Fire 322222.

TIME: September 24th–March 26th – GMT. March 26th–September 24th – GMT plus one hour.

HOLIDAYS: 1st January; 24th March; 25th April; 1st May; 25th May; 10th June; 15th August; 5th October; 1st November; 1st December; 8th December; 25th December.

DEVELOPMENTS: In a second stage of the Santa Apolonia container terminal there will be a new wharf of 500 m. length, with water depths of 13.5 m. and a close levelled paved ground area of nearly 50,000 sq. m. which is in advance phase of construction. This terminal will have, when completed, an 850 m. long wharf and a close paved area of 75,000 sq.m.

This second stage will also include two roll-on/roll-off berths, as well as lift-on/lift-off equipment. It is operated by the Port Authority.

AUTHORITY: Administracao Geral do Porto de Lisbon.

AGENTS: A. J. Goncalves de Moraes, Lda., 22, Rua do Alecrim – Lisbon-2. P.O. Box 2772. Tel. 364943-366671. After hours Tel: 2750594. Telex 12296/7/8. Cables: Amoras. Shipping and Forwarding Agents, Chartering and Brokers, Insurance Agents, Stevedoring.

SETUBAL: 38.30 N. 08.55 W.

DOCUMENTS:

5 Crew Lists.
5 Passenger Lists.
Personal belongings of the Crew (portable radio, binoculars, cameras, etc).
Store List.
Health Declaration.

For cargo: Dangerous Cargo List. Cargo Manifest. Transit Cargo Manifest (if any). Copy of B/L.

PILOTAGE: The pilotage service is supplied exclusively by the "Corporacao de Pilotos do Rio e da Barra de Setubal" which runs a permanent service.

To assure prompt attention requests for Pilots must be made in the following manner:

Entries: To send at least 6 hours beforehand a radiotelegram or a radiotelephone message preferably on S.S.B./AM to Pilotos de Setubal giving the name of the ship, ETA and draft.

This information must be confirmed on VHF or IF two hours before the ship arrives at the bar.

Departures and movement in the River: Between 0800 hrs. and 1800 hrs. on weekdays and 0800 hrs. and 1300 hrs. on Saturdays. Sundays and holidays, to communicate by telephone or on VHF with the "Estacao de Pilotos de Setubal" at least one hour beforehand, giving the name of the ship, the time and place where the Pilot is required and the service needed.

Only in cases of emergency will requests be accepted outside these hours.

To effect requests for Pilots, the Corporacao de Pilotos de Setubal use the following means of communication:

VHF — Listening permanently on Channel 16 (156.80 m/cs.) being able to reply on any of the following Channels as requested: 6, 8, 13, 16, 18, 22, and 73.

IF — Listening in permanently on 2182 kc/s., replying Pilotos de Setubal on 2132 kc/s., their working frequency. Once contact has been established ships must change to this frequency. Communications can be made in SSB or AM according to the equipment of the ship.

Telephone of CTT — No. 22914.

The Pilots embark by motor launch based in Setubal and waiting near the fort at Portinho da Arrabida when necessary and the weather permits.

To increase speed and safety on embarking and disembarking, ships of more than 4,000 tons gross, when light, and those of greater capacity in any condition, unless they have a door in the side or other modern means for Pilots to board and leave, and if the weather permits, should lower the gangway to about 3 m. above sea level and fix a rope-ladder so that it stays alongside the lower platform of the gangway.

Bad weather from the South, causing breaking waves at the edge of the shoals, sometimes prevents the pilotage service from operating.

In such conditions, ship must contact the Pilotos de Setubal to discover the state of the bar and limitations imposed on the pilotage service.

ANCHORAGE: Only inside harbour with a Pilot aboard.

RESTRICTIONS: No restrictions on night entry. At low tide vessels only up to 22 ft. draft. Max. draft 27 ft., length/breadth no restrictions.

HEALTH: Free pratique automatically given when ships come from other Portuguese port. Otherwise, Health Certificate is to be handed over to Health Authorities during clearance procedures.

RADIO: Call through Lisbon Radio.

TUGS: 5 available.

STEVEDORES: Ordered by the Agent some time in advance.

MEDICAL: Prior to arrival and in order not to delay ship's clearance, Master should inform by radio if medical assistance required, this only in case of contagious or epidemic diseases.

TANKERS: Shell Maritime installation with private pier. Discharge lines 4 in., 6 in. and 8 in.

DENSITY: About 1026.

FRESH WATER: Supplied from shore to all piers.

FUEL: Ordinary fuel available at Shell Installation to ships holding contract with Shell; or fuel supplied from lorry if ship holds contract with other company.

FIRE PRECAUTIONS: No smoking on deck or piers.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: By crew unless otherwise specified in C/P. Stevedores usually help.

CUSTOMS ALLOWANCE: About 200 cigarettes and 2 bottles of spirits per man.

CARGO GEAR: Supplied by stevedores.

IDENTIFICATION CARDS: Supplied and filled in by the Agent. Crew members cannot leave Three Castles area (Setubal-Palmela-Sesimbra) without a special permit from Customs Guards obtained through Agency.

CONSULS:

Finland	tel. 26018
France	" 24612
Spain	" 22018

REPAIRS: All types available. Lisnave shipyard and dry docks at Lisbon within about 50 miles.

DEVELOPMENT: Setenave is presently building a Shipyard for new building and repairs for very large ships in the estuary of Setubal.

The facilities will consist of: 1 repair dock for ships up to 1,000,000 d.w.t. 1 repair dock for ships up to 350,000 d.w.t. New building berth for ships up to 700,000 d.w.t.

REPATRIATION: All facilities.

AIRPORT: Nearest at Lisbon, about 50 miles away.

TIME: From September 26th to March 26th — GMT. From March 26th to September 26th — GMT plus 1 hour.

AUTHORITY: Junta Autonoma do Porto, Setubal.

AGENT: — A. J. Goncalves de Moraes, Lda., 281, Av. Luisa Todi-Setubal. Tel. 22399. Telex 16212. Cables: Amoras. After office hours: 2750594. Shipping and Forwarding Agents, Chartering and Brokers, Insurance Agents, Stevedoring.

VIANA DO CASTELO: 41.41 N. 08.50 W.

DOCUMENTS: Health Declaration.

3 Crew lists.
Provision list (ships and individual).
Tobacco Declaration and Entrance Forms supplied by Agents on arrival.
2 Manifests and 1 copy of each Bill of Lading concerning cargo to be discharged.
1 Transit Manifest if cargo in transit exists.

PILOTAGE: Always compulsory. ETA should be given to Agent with ample notice. Signals; during the day Flag "G" of International Code, and at night 3 long whistles. Boats black with white cabins. Pilots to be taken on board in outer or inner harbour respectively with bad or good weather.

ANCHORAGES: Outer or inner harbour according to weather conditions.

RESTRICTIONS: Entering and sailing only during daylight unless exceptionally good weather.

MAX. SIZE: Max. draft 15 ft. on HWST and 13 ft. on HWNT, with good sea conditions. Max. breadth 13 m.

HEALTH: Free pratique authorised for vessels coming from other Portuguese Continental ports. For vessels coming from other countries Health Declaration must be filled in and delivered to the Agents.

RADIO: Call Viana do Castelo Pilots frequency 2182 kc/s. and listen on 2132 kc/s.

TUGS: No tugs.

BRIDGES: 1 bridge which allows entrance/sailing at any time.

STEVEDORES: Ordered by Agents 8 hours in advance.

MEDICAL: No prior advice is necessary.

FRESH WATER: Supplied by shore installations.

FUEL: Only small quantities of gas-oil can be supplied.
GANGWAY/DECK WATCHMEN: Available but not compulsory.
OPENING/CLOSING HATCHES: Work usually done by crew.
CUSTOMS ALLOWANCE: No limit, but must be declared.
IDENTIFICATION CARDS: Required.
CONSULS: France 22412. Spain 23018.
REPAIRS: All types of deck, engine and electrical repairs can be carried out.
DRY DOCKS: Three dry docks available.

	Length	*breadth*	*draft*
Dock 1	203 m.	34.0 m.	18 ft.
Dock 2	127 m.	18.5 m.	18 ft.
Dock Eng. D. Pacheco	104 m.	11.0 m.	16 ft.
Fitting Dock	190 m.	65.0 m.	21 ft.

No special equipment for tank washing is available.
REPATRIATION: No difficulties for crew repatriation.
AIRPORT: Nearest Oporto airport at 55 km.
TIME: From September 26th to March 26th – GMT. From March 26th to September 26th – GMT plus 1 hour.
HOLIDAYS: 1st January; Holy Friday; 25th April; 1st May; Corpus Christi; 10th June; 15th August; 5th October; 1st November; 1st, 8th, 24th and 25th December.
POLICE/AMBULANCE/FIRE: Tel. 115.
SHORE LEAVE: Crew allowed ashore.
AUTHORITY: Junta Autonoma dos Portos do Norte.

VILA REAL DE SANTO ANTONIO:
37.10 N. 07.26 W.

DOCUMENTS:
- 2 Health Certificates.
- 3 Crew Lists.
- 1 List of Passengers in Transit.
- 2 Lists of Passengers Disembarking.
- 2 Dangerous Cargo Lists.
- 1 Ship's Register.
- 1 Tonnage Certificate.

PILOTAGE: Black boat, wooden hull, white "P" at bow. Stationed near buoy No. 1 (harbour entrance). All sea-going vessels entering or leaving harbour are obliged to avail themselves of the services of a Pilot. Latest 24 hours before prior arrival cable "Corporacao dos Pilotos de Vila Real de Santo Antonio" or to Agent. Departing vessels should apply for their Pilots at least 6 hours before the time of departure.
MAX. SIZE: Entrance channel 4,000 m. long, has a depth of 4 m. (12 ft.) at LW. Vessels drawing up to 5.5 m. (16 ft.) can enter under normal circumstances 1 hour before HW, a keel clearance about 1 ft. will be maintained.
TUGS: Tugs up to 105 h.p. available.
BERTHING: 1 pier 300 m. long. Depth at pier 20 ft.
STEVEDORES: Ordered by Agents. ETA to stevedores is necessary. No work allowed on Sundays.
MEDICAL: Inoculations in hospital Marques Pombal -Vila Real de Santo Antonio.
FRESH WATER: Obtainable alongside quay.
FUEL: Gas-oil can be supplied in small quantities.
GANGWAY/DECK WATCHMEN: Compulsory.
OPENING/CLOSING HATCHES: Crew allowed open and close.
CUSTOMS ALLOWANCE: About 200 cigarettes and bottle of spirits per man.
CONSULS:
Britain, Falconer, Rua Dr. Oliveira Salazar, No. 4
Netherlands, Matias Gomes, Avenida da Republica, 73
France, Santiago Ponce Medeiros, Avenida da Republica, No. 114
Finland, Emilio Garcia Ramirez, Avenida da Republica, No. 133
Greece, Jose Rodrigues Marques, Avenida da Republica, No. 109
Italy, Mario Parodi, Avenida da Republica, No. 11
REPAIRS: There is 1 small ship-repair yard at Vila Real de Santo Antonio.
HOLIDAYS: 1st January; Holy Friday; April 25th; 1st May; 10th June; 15th August; 5th October; 1st November; 1st December; 8th December; 25th December.
POLICE/AMBULANCE/FIRE: Police 66; Ambulance 202; Fire Brigade 202.
AUTHORITY: Junta Autonoma dos Portos and Delegacao Aduaneira de Vila Real de Santo Antonio.

NOTES
Please also advise Shipping Guides Ltd.

Puerto Rico

AGUADILLA: 18.26 N. 67.10 W.

DOCUMENTS:

1 copy of Inward Foreign Manifest (U.S. Customs Form 5727-A), Cargo for San Juan.
1 Stores List.
1 Crew Purchase List.
1 Passenger List (if any).
1 Crew List (U.S. Form 1-418).
1 copy of Ships in Transit Cargo Manifest.
Clearance from Last Port.

PILOTAGE: Mayaguez's Pilots provide service in Aguadilla. Advise ETA in good time to Aguadilla Terminal.

RESTRICTIONS: Open port, very deep, safe in good weather. Cold fronts from North cause very heavy swells. Cannot berth during this kind of weather.

MAX. SIZE: 600 ft. long, 36 ft. draft.

HEALTH: Advise arrival to Aguadilla Terminal Inc. for free pratique.

BERTHING: The Aguadilla Shipping Terminal operates a bulk sugar-loading facility. Sugar-loading vessels tie-up on mooring buoys. There is 40 ft. or more depth at the outer end of the bulk sugar-loading berth. Ship ties up to 4 buoys and two bollards at main tower. Spring lines needed for shifting. Terminal boat handles lines, no charge; ship's lines not less than 600 ft. long.

MEDICAL: 24 hours notice preferred; 90 miles for nearest hospital except emergencies.

TANKERS: Molasses tankers -10 in. connection (loading only). Only sugar and molasses loaded at the only loading facility available. Rate 66 t.p.h. sugar; 500 t.p.h. molasses.

There is also a mooring buoys and pile clusters berth for the tanker traffic that supply aviation gas for Borinquen Airport.

FRESH WATER: Available. 2 in. pipe-line with meter, 40 c/ton.

GANGWAY/DECK WATCHMEN: Usually crew members are used.

OPENING/CLOSING HATCHES: Performed by stevedores.

CERTIFICATES/CUSTOMS ALLOWANCE: U.S. Customs regulations.

IDENTIFICATION CARDS: Required to go ashore.

CONSULS: No local representation.

REPATRIATION: Can be arranged.

AIRPORT: 20 minutes drive. Regular airlines.

TIME: Atlantic Std. Time, 4 hour less than GMT. No alterations during year.

HOLIDAYS: Refer to "San Juan".

SHORE LEAVE: Allowed.

DELAYS: No delays unless another ship is already berthed.

AUTHORITY: Puerto Rico Ports Authority, Harbour Master.

GUANICA: 17.57 N. 66.54 W.

DOCUMENTS/GENERAL INFORMATION: Refer to "Ponce".

PILOTAGE: Port operations are under the control of the Captain of the port. Pilot services are available day and night, by previous arrangement with Guayanilla Pilots.

ANCHORAGE: Harbour is located 8 miles Westward of Guayanilla Bay. Though small, it is one of the best hurricane harbours in Puerto Rico.

TUGS: Available from Guayanilla.

BERTHING: Pier facilities are owned by the Guanica Central and used for bulk sugar shipments and limited general cargo operations. On the East side of the harbour entrance there is a reinforced concrete bulkhead wharf 700 ft. long with depths of 28 ft. alongside for the handling of bulk fertilisers. Small craft landings and facilities are along the boulevard fronting the beach.

FRESH WATER: Available in limited quantities for emergencies only.

FUEL: Available by trucks from Ponce.

MEDICAL: Medical assistance is available; if hospitalisation is required for any crew member, it will probably be necessary to arrange for admittance to a Ponce hospital.

CONSULS: None available locally, nearest at Ponce, Puerto Rico.

AUTHORITY: Port Captain, Puerto Rico Ports Authority.

GUAYANILLA: 18.00 N. 66.46 W. (See Plan Book)

Oil Terminal owned by Commonwealth Oil Refining Co.

DOCUMENTS/GENERAL INFORMATION: Refer to "San Juan".

PILOTAGE: Port operations are under the control of the Captain of the port and pilot services are available day and night.

ANCHORAGE: It is the largest hurricane harbour and one of the best in Puerto Rico. Available for vessels of any draft. The harbour is protected at its entrance by extensive reefs which extend a mile or more offshore. The entrance channel between these reefs is about 1.5 miles long and about 0.4 mile wide.

MAX. SIZE: Tankers up to 680 ft. LOA, with max. draft 35 ft. 6 in. forward and 38 ft. aft.

TUGS: Available 24 hours daily, as requested by vessel.

BERTHING: Fuel dock. 2×680 ft. berths with 36 ft. 06 in. depth alongside. Mooring buoys placed to assist in clearing dock and mooring dolphins. No slop disposal facilities. The Union Carbide Company has berthing facilities for barge operations.

New port facilities for Commonwealth Oil Refining Co. and Pittsburgh Plate Glass are owned by the Puerto Rico Ports Authority.

FRESH WATER: Available whenever requested by the vessel.

FUEL: Available only whenever arranged by owners of the vessel and/or charterers prior to arrival.

MEDICAL: Medical service is available; hospitalisation at Ponce, which is only 15 minutes distance.

CONSULS: None available locally; nearest at Ponce, Puerto Rico.

AUTHORITY: Commonwealth of Puerto Rico — Harbour Master. Port facilities are operated and owned by the oil refinery.

JOBOS (Aguirre): 17.56 N. 66.13 W.

DOCUMENTS/GENERAL INFORMATION: Refer to "Ponce".

PILOTAGE: The Port of Jobos is served by the Pilots of Port Ponce. Services must be arranged in advance.

ANCHORAGE: A fine land-locked harbour, located on the South coast, approx. 42 nautical miles Eastward of Ponce and 20 miles West of Point Tuna. Anchorage inside the bay is Southward of the pier in depths of 19–24 ft. soft mud bottom.

RESTRICTIONS: The principal entrance is from Westward between Morrillo Cay and Ratones Cay.

TUGS: No tug-boats available.

BERTHING: To the West of the sugar pier (not in use) is a concrete barge dock 632 ft. in length with a buoyed access channel for the receipt of fuel oils for the Water Resources Authority.

FUEL: No bunkers are available.

MEDICAL: Medical assistance is available; if hospitalisation is required for any crew member, it will probably be necessary to arrange for admittance to a Ponce hospital.

CONSULS: None available locally; nearest available at Ponce.

AUTHORITY: Puerto Rico Ports Authority.

LAS MAREAS: (Guayama) 17.55 N. 66.10 W. (See Plan Book)

The Puerto de las Mareas Terminal is located on the South side of the island of Puerto Rico. It is located approximately 26 nautical miles East of the port of Ponce. The nearest city is Guayama. All vessels calling at Phillips Puerto Rico Core Inc., Puerto de las Mareas Terminal should be consigned to Phillips Puerto Rico Core Inc., and all official documents for such ships should show them so consigned. In conformance with port regulations, no vessel will be allowed to tie up alongside a pier without having first obtained a berthing permit from the Ports Authority Captain of the port.

DOCUMENTS: The following documents are required by the Customs and Immigration Authorities for entry and clearance:

Master's Oath (Original and 1 copy).
Stores List (Original and 2 copies).
Crew Purchasing List (Curio List) (Original and 2 copies).
Inward Foreign Manifest (Original and 3 copies).
Quarantine Free Pratique (will be furnished by Doctor).
Deratisation Certificate (in date).
Crew List (1 certified and 2 not certified copies).
Clearance from Last Port (depends on sailing port).
Crewmen Landing Permits (for each Crew member without the plastic Form I-189).
Passenger List (if any passengers).

The Passenger List must show full names, sex, age, nationality, and occupation of passengers landing at Puerto de las Mareas. The ultimate destination of in-transit passengers must also be shown in the passenger list.

Deratisation Certificates can be renewed at the port.

In most cases, outward clearance and cargo documents can be delivered on board by the Ship's Agent, making it unnecessary for Masters to obtain such clearance in person from the U.S. Customs Office.

PILOTAGE: The use of Pilots is compulsory for all vessels, with the exception of American Flag vessels bound to or arriving from a U.S. port which may dispense with Pilots provided the vessel has on board a deck officer qualified and licensed by the United States Coast Guard, as a harbour Pilot for Puerto de las Mareas. Vessel's Agent will arrange for Pilot, upon notification in the arrival notice, who will board inbound vessels off the entrance to the harbour about 1 mile off-shore.

When approaching the dock and channel, vessels must have one anchor, to be designated by the Pilot, free of the hawse pipe and ready for quick release if necessary to stop the vessel.

Every vessel requiring a Pilot must provide, properly rigged and secured, a pilot ladder which conforms to international safety standards. When picking up or dismissing the Pilot, the vessel must heave-to and provide a lee with the pilot ladder rigged on the lee side.

Pilotage services available day and night.

APPROACHES: The harbour is entered through a channel 250 ft. in width and its narrowest portion, bearing N. 25° E. It is protected on the Eastern side by a rubble mound breakwater extending approximately 700 ft. from the shore line. The dredged channel extends out to the 40-ft. depth contour and has a width at this contour of approximately 900 ft., narrowing to 250 ft. approximately 2,100 ft. inshore from the 40-ft. contour. The 250-ft. wide portion of the channel is approximately 1,000 ft. long. At the inshore end of the 250-ft. wide channel, the harbour itself extends for a length of 2,300 ft. and a maximum width of 950 ft. The harbour has a depth of 38 ft. below mean low water. The above dimensions are given to the bottom of the channel; the sides of the channel and the harbour are sloped at 1 in 3.

NAVIGATIONAL AIDS: (A) Seabuoy: The Seabuoy is located 300 ft. West of the centre line of the channel 2 miles offshore from the end of the rubble mound breakwater. It displays a white light through 360° flashing 0.4 second on and 3.6 second off. The buoy is painted with black and white vertical stripes and is fitted with a radar reflector.

(B) Channel Marker Buoys: 2 lighted channel marker buoys are provided, located 550 ft. on either side of the centre line of the channel, 2,024 ft. offshore from the end of the rubble mound breakwater. These are lighted and marked as follows:

(i) Port-to (inbound vessels). This buoy has a 360° green light, flashing 0.5 second on and 2.0 seconds off. It is equipped with day-boards 3 ft. square, and painted black with green reflective perimeter.

(ii) Starboard-to (inbound vessels): This buoy is a 360° red light, flashing 0.5 second on and 2.0 seconds off. It is equipped with triangular day-boards 4 ft. by 4 ft., painted red.

(Both these buoys are located at the 40-ft. depth contour.)

(C) Channel Marker Navigation Lights: There are 4 channel marker navigation lights, 3 of which are located on piling, and 1 on the end of the rubble mound breakwater.

(i) Port-to (inbound vessels): This marker is located on piping 400 ft. from the centre line of the channel, 2,024 ft. inshore from the channel marker buoys. The light is located 20 ft. above MLW, and is displayed through 360°. It is a green light, flashing 0.5 second on, 2.0 seconds off. The marker is fitted with 3 ft. square day-boards, painted black with reflecting green perimeter.

(ii) Starboard-to (inbound vessels): This marker is located on a tower at the end of the rubble mound breakwater, 50 ft. above MLW. The light is displayed through 360°, red, flashing 0.5 second on and 2.0 seconds off. The marker is equipped with 4 ft. by 4 ft. red triangular day-boards.

(iii) Port-to(inbound vessels): This marker is located 175 ft. from the centre line of the channel 1,000 ft. inshore from the end of the rubble mound breakwater. It is equipped with a green light showing through 360°, flashing 0.5 second on and 2.0 seconds off. The light is located 20 ft. above MLW. The marker is equipped with 3 ft. square day-board, painted black with green reflective perimeter.

(iv) Starboard-to (inbound vessels): This marker is located 175 ft. from the centre line of the channel, 1,295 ft. from the end of the rubble mound breakwater, and is mounted on piling with the light 20 ft. above MLW. It is equipped with a 360° red light, flashing 0.5 second on and 2.0 seconds off. The marker is equipped with red day boards 4 ft. by 4 ft. triangular in shape.

(D) Obstruction Light: This light is mounted on the turning dolphin and displays a 360° steady red light.

(E) Range Lights: The front range light is mounted on a tower located on the centre line of the channel. It consists of a set of double red aircraft warning lights 75 ft. above MLW. It is fitted with 4 ft. by 8 ft. day-boards, painted with red-orange reflective coating. The light is located 3,500 ft. inshore from the end of the rubble mound breakwater.

The back range light is located on the centre line of the channel, 5,500 ft. inshore from the end of the rubble mound breakwater. The light consists of a set of double red aircraft warning lights, 110 ft. above MLW. The tower is fitted with 6 ft. by 12 ft. day-boards painted with red-orange reflective coating with a 3 ft. white stripe down the centre.

RESTRICTIONS: The entrance channel has a depth below MLW of 40 ft. and the harbour itself has a depth of 38 ft. below MLW. Shipmasters are cautioned that swells in the approach channel can increase the draft of their vessels, therefore caution must be exercised in entering the channel in periods of heavy weather.

RADIO: Agents of vessels or owners or its representatives should advise Phillips Puerto Rico Core Inc. by telex, cable or telephone, 72 hours, 48 hours, and again 24 hours before their expected arrival at the sea buoy.

ITT Telex No. 385347 "Philcorgya".
Puerto Rico Communication Authority-Telex No. 347.
Telephone (809) 864-1515.

Incoming vessels should advise the Agent by radio 48 hours and again 24 hours before their expected arrival at the sea buoy. Coast stations available for such advice are:

Lantana Radio (WOE) -Lake Worth, Florida. (Equipped with RCA automatic land-line circuit direct to New York City, San Francisco, California and Washington, D.C.)

New York Radio (WNY) -New York City. (Equipped with RCA automatic land-line circuit direct to New York City, San Francisco, California, Washington, D.C. Also equipped with teletypewriter (TWX) for direct communication with steamship companies in the United States having this equipment.)

Chatham Radio (WCC) -Chatham, Massachusetts. (Equipped with RCA automatic land-line circuit direct to New York City, San Francisco, California, Washington, D.C.)

San Juan Radio (WCT) -Radio Corporation of Puerto Rico Marine Station, Transmits at 2530 kc/s., receives at 2134 kc/s., watch at 2182 kc/s.

In addition to the above commercial radio facilities, incoming vessels may contact the port through facilities on tug stationed at the port. These facilities are as follows:

HF radio: range 2 to 300 miles. 2182 kc., working frequencies 2638 and 2738.
VHF radio: range 30 miles. Channel 16 (156.8 Mc/s), working frequency Channel 14 (156.7 Mc/s).
SSB radio: 12 Mc/s, 8 Mc/s, 4 Mc/s.

Vessels diverted to Puerto de las Mareas must furnish the required 48-hour and 24-hour notices of arrival, unless notice of diversion is received when less than 48 hours before anticipated arrival, in which case the notice of arrival will be given as soon as notice of diversion is received. In such cases, however, Phillips Puerto Rico Core Inc. reserves the right to refuse to load or unload such vessels if tankage is not available for the cargo, or if cargo is not available to loading.

TUGS: As a safety measure, Masters of vessels calling at Las Mareas are advised to engage tugboat assistance on arrival, turn ship around, and tie up alongside the pier, heading bow out to sea. Arrangements for the use of tugboats should be made well in advance of vessel's arrival of the sea buoy.

BERTHING: The dock at the terminal consists of a finger pier approximately 1,122 ft. in length inside the harbour with a tanker loading berth on each side. The finger pier consists of a cargo platform 45 ft. by 90 ft., with fitted fender piling and dolphins. The cargo platform is connected to shore by a driveway 12 ft. 6 in. wide. The mooring and breasting dolphins outboard of the cargo platform are connected to each other and to the platform by a walkway. No launches are required to handle mooring lines. The top of the cargo platform is 12 ft. above MLW level. Water depth alongside the finger pier is 38 ft. at MLW. There is no current at the dock or in the harbour.

The fender system and breasting dolphins are designed to withstand the forces exerted by a vessel of 81,300 tons displacement approaching the dock with a velocity component perpendicular to the dock face of 0.30 ft. per second.

Bollards for mooring lines are provided on the breasting dolphins, the mooring dolphins and the turning dolphins. Each of the bollards and their associated dolphins are designed to withstand 120,000 pounds of mooring line tension.

Vessels will be required to vacate berths promptly on completion of loading or discharging cargo. Permission to use a berth when not loading or discharging cargo may be granted under special circumstances, and must be requested in writing to captain of the port.

Vessels will be allowed 1 hour in which to vacate the berth after completion of cargo handling, to start when the last hose is disconnected.

Three hours will be allowed for ballasting at the berth after completion of discharging cargo. Vessels awaiting cargo papers and/or Customs clearance must vacate the berth on expiration of allowed time and move to anchorage to wait for delivery of the papers.

If the vessel fails to vacate the berth on the expiration of the allowed time, it will be held liable for payment of any demurrage and/or damages incurred by Phillips Puerto Rico Core Inc., as a result of delays to other vessels waiting berths, or for any other consequence of its failure promptly to vacate the berth.

Turning basin 1,100 ft. wide and 1,060 ft. long, outboard of the turning dolphin, is provided. The turning basin has a depth over its entire area of 38 ft. at MLW. The turning dolphin at the end of the finger pier is designed to assist vessels in turning in the basin. Normal procedure will be for vessels to enter the harbour and turn prior to docking. In the case of loaded vessels entering the harbour, they may, at the Master's discretion, wait until they have discharged, and turn just prior to leaving the harbour.

HURRICANES: The South coast of Puerto Rico is subject to winds of hurricane force, accompanied by abnormally high tides, during the late Summer and Fall. In the event of such abnormal conditions, vessels may be required to put out additional moorings, or if necessary, to suspend all operations and put to sea until normal conditions prevail.

MEDICAL: U.S. Public Health Service doctors will be available for attendance on vessels at Puerto de las Mareas, upon receipt of notice 48 hours prior to arrival. If hospitalisation is required for any crew member, arrangement could be made through the ship's Agent with hospitals located in the municipality of Guayama. Ambulance service can be furnished through request to Agent.

TANKERS: The various cargoes available at the Puerto de las Mareas terminal include motor fuel, cyclohexane, benzene, paraxylene, orthoxylene, mixed xylenes, paraffinic naphtha, and other special products. Feedstock for Phillips Puerto Rico Core Inc. facilities is naphtha, and there is a fuel oil unloading line. Cargo handling is accomplished through various sizes of lines, as follows:

Product	Hose size (in.) (each side of dock)	Line size (in.)	Loading/ discharging rate with one pump
Naphtha feedstock	4-8	20	13,700 bph
Motor fuel	3-8	20	12,000 bph
Motor fuel	2-8	12	5,700 bph
Benzene	1-8	12	2,000 bph
Cyclohexane	1-8	10	3,000 bph
Mixed xylene	1-8	12	3,400 bph
Orthoxylene (high purity)	1-6	8	800 bph
Orthoxylene (standard purity)	1-6	8	2,600 bph
Paraffinic naphtha	2-8	16	7,500 bph
Paraxylene	1-6	8	2,000 bph
Toluene	1-8	8	2,000 bph
Fuel oil	1-8	12	2,000 bph
Ballast	1-8	8	3,000 bph
Domestic water	1-2	2	7 tph

CONNECTING/DISCONNECTING HOSES: A crew will be provided by the terminal to connect and disconnect hoses on the ship. Vessels are requested to have blanks removed from the cargo lines and hose handling booms rigged on arrival at the dock.

READINESS: Notice of Readiness to load or discharge is warranty that the vessel is in all respects ready to receive or discharge cargo, and that the vessel's equipment is ready and capable of loading or discharging petroleum or petrochemical products. Phillips Puerto Rico Core Inc. reserves the right to refuse to accept such notice of readiness if, upon inspection, the vessel is found not to be ready to receive or discharge cargo. Vessels will be accepted loading or discharging on a "first come, first served" basis. Vessels may tender notice of readiness upon arrival, berth or no berth, according to the terms of the charter party or contract of affreightment under which they have been engaged.

BALLAST: Ship's Masters are reminded that they are prohibited by Puerto Rico law from pumping dirty ballast overboard when within the Puerto Rican limits. Facilities are provided for disposing of dirty ballast ashore at Puerto de las Mareas. Vessels provided with separate clean ballast systems completely segregated from the cargo system and reserved for clean ballast only, may pump ballast overboard from such systems while at the dock, provided the tanks are inspected and approved for such pumping by the Dockmaster. Heavy fines are enforced for any discharge of dirty ballast, and due to the limited area of harbour, any violations will be quickly detected and reported.

Ballast is pumped ashore through an 8-in. line, capable of receiving at a pressure at the ship's rail of 100 psi. The ballast facilities are sufficient to accommodate 30,000 barrels of dirty ballast. Vessels are requested to arrive with minimum of dirty ballast.

FRESH WATER: Available at the dock in limited quantities.

FUEL: No bunkers available at Puerto de las Mareas. In an emergency, bunkers may be delivered by barge from Ponce. In such cases, however, special permission must be obtained from the Harbour Master to take bunkers from the barge while loading or discharging cargo. Lubricating oils may be obtained from Ponce.

STORES: May be ordered through the ship's Agent for delivery at the terminal, but must be ordered at least 48 hours prior to vessel's arrival.

CONSULS: Consular representatives of the following nations are available in Ponce:

Venezuela	Dominican Republic	Spain
France	Netherlands	Sweden
Panama	Honduras	

Further information can be obtained through the Agent.

REPAIRS: Complete repair and dry dock facilities are available in San Juan. Limited facilities for emergency repairs are availabe at Ponce. Requests for such services should be made to the Agent 24 hours prior to arrival.

SURVEYORS: There are no classification society surveyors stationed at Puerto de las Mareas, but they are available on call from Ponce or San Juan. Requests for survey services should be made through the vessel's Agent at least 24 hours prior to arrival.

CARGO INSPECTION: Representatives of Chas. Martin Inspectors of Petroleum Inc. will be available for cargo quantity and quality inspection as required. Address: POB 1017, Guayama, Puerto Rico 00654. Telephone: (809) 864-0428, 864-1515.

CUSTOMS: U.S. Customs and Immigration Authorities will board vessels at the dock, except in unusual circumstances, in which case they will board the vessel at anchor outside the harbour. The vessels will be required to furnish an accommodation ladder.

American Flag vessels will not require Customs entry or clearance unless arriving or departing to a foreign port.

HEALTH: The usual regulations concerning sanitation apply to the Harbour of Puerto de las Mareas. The use of rat guards on all lines is compulsory, under penalty of fines for failure to comply. Trash and galley refuse may not be dumped into the waters of the harbour and must be kept on board until the vessel has sailed. Discharge of toilets and bathrooms into waters of the harbour is prohibited. Sanitary facilities are provided on the dock for use by Crew members while their vessels are at berth.

FIREARMS: All firearms and ammunition should be shown on the stores list and may not be removed from the vessel during its stay in Puerto Rican waters. Any violations of this regulation will result in fines and confiscation of firearms and ammunition.

SAFETY: The provisions of Part 35 "Operations" of the Rule and Regulations to Tankvessels, Subchapter D (CG-123) published by the U.S. Coast Guard are in force at Puerto de las Mareas, and must be observed under penalty of fine and imprisonment as provided therein.

Particular attention is called to the following safety precautions:

(1) Vessels must be, and remain, in readiness to sail from the dock at any time. In the event of engine repairs, which might interfere with such readiness to sail, being required, written permission must be obtained from the Harbour Master before such repairs may be undertaken.

(2) Scuppers must be plugged during cargo-handling operations.

(3) Absolutely no smoking or open lights will be permitted on the dock or open decks.

(4) Screens in good conditions must be used over gauging hatches when not actually gauging.

(5) Operations may be suspended at the discretion of the Master, or may be required to be suspended by the Harbour Master, during severe electrical storms.

(6) In the event of a breakdown of communications between dock and the shore terminal during loading operations, and the need to shut off the flow of cargo to the vessel, an emergency signal consisting of a continuous sounding of the ship's whistle shall be given. The signal shall not be discontinued until the flow of the cargo has been shut off.

(7) An electrical bonding cable will be provided from the dock to the ship. This bonding cable must be firmly secured to a clean metal surface of the vessel's hull or cargo piping before hoses are connected, and must remain in place until the hoses are disconnected.

Violations of these and other safety regulations, as described in Parts 35 of Subchapter D will result in the suspension of cargo-handling operations by the Harbour Master, or the PPRC dock personnel or safety inspectors, without recourse. Such suspension of cargo operations will continue until the violations are corrected or the safety hazards removed.

MAIL: Official and personal mail may be addressed to the vessel in care of the Agent, and will be delivered to the vessel by the Agent on arrival. The Agent will accept official and personal mail from the vessel, and will ensure its delivery to the local U.S. Post Office, upon receipt of a mail transmittal slip to support disbursements.

SHORE LEAVE: Normally, there are no restrictions on shore leave. In order to avoid sailing delays, due to late return of Crew members, Masters are requested to ensure that all Crew members are aboard at sailing time.

Crew of foreign vessels must present valid passports, current individual International Vaccination Certificates, and a copy of Form I-95, properly filled out, in order to be passed through the terminal gates.

Taxi service is available from Guayama and may be called from the gate.

AUTHORITY: Puerto Rico Ports Authority; port facilities operated by Phillips, P.R. Core, Inc.

MAYAGUEZ: 18.13 N. 67.12 W.

DOCUMENTS: If vessel staying less than 24 hours:

Crew List.
Stores List.
Cargo Manifest.
Crew Purchase List.
Valid Load-line Certificate.
Ship's Register.
Clearance from Previous Port.

Vessels working cargo. 2 sets of documents to be prepared as follows:

Original:
1 copy of Inward Foreign Manifest (U.S. Customs Forms 5727-A), Cargo for San Juan.
1 Stores List.
1 Crew Purchase List.
1 Passenger List (if any).
1 Crew List (U.S. Form 1-418).
1 copy of Ship's in Transit Cargo Manifest.
Clearance from Last Port.

Duplicate:
Same as original except the in-transit Cargo Manifest.
If vessel has on board cargo for another American port, an extra copy of the original Cargo Manifest is required.
Crew members to declare individually all articles such as souvenirs, etc.

Agents require:
3 sets of Bills of Lading.
2 copies of Manifest (for San Juan only).
1 copy of Crew List.
1 copy of Stores List.
1 copy of Crew Purchases List.
1 copy of Narcotics List.
1 copy of Passengers List.

Certificates:
Valid Load Line Certificate.
Ship's Register.
U.S. Tonnage Tax Certificates (if any).

PILOTAGE: Ships Agents must make arrangements with Captain of the Port Office at Mayaguez Pier well in advance, not less than 24 hours, of arrival of vessel at harbour entrance. Pilot boats are painted black (hull) and white (topside) as required, showing the letter "P" on each bow. Pilots board 1 to 2 miles offshore of sea buoy depending on weather conditions. Pilot service available day and night.

ANCHORAGES: Close to the entrance channel and boundaries. Sufficient depths for larger vessels.

RESTRICTIONS: The bay is easily entered day or night and is a good harbour in any weather, except in a hurricane. The harbour is 3.8 miles wide, and offshore is protected by shoals which extend across the harbour entrance in a general North by West direction.

The principal channel is about 0.4 mile wide, with depths at the entrance of about 47 to 120 ft. and it is marked by lighted buoys and the range. Depth in the inner channel is approximately 30 ft. and close alongside the pier from 28 to 29 ft.

MAX. SIZE: Cargo vessels 600 ft. or more in length call at the port. Safe draft for operations at the wharf is 27 ft.

RADIO: Communication to all points, including ships at sea, is available through commercial systems. Cables-Telex via RCA Communications, Inc., a global service of Radio Corporation of America. ITT World Communications, Inc., tel. 830-3316. Puerto Rico Telephone Company, local and overseas communications services, 129 and 128.

TUGS: Not used at Mayaguez Port.

BERTHING: Berthing permit required from the Ports Authority. The Puerto Rico Ports Authority operates the terminal facilities which consist of a bulkhead wharf approximately 1,200 ft. long, apron width, 30 ft., and transit sheds. There are other berthing facilities in the port which are owned by the tuna packing plants.

STEVEDORES: Arrangements are made by the ship's Agents or representatives.

MEDICAL: The Agent should know in advance any medical needs so that he can make the necessary arrangements with the U.S. Public Health Service. Good medical and hospital services available.

TANKERS: See "Port of Guayanilla". Regular calls from Esso and Texaco to unload fuel by means of barges in order to supply tanks on land by means of pipes located at berthing facilities.

FRESH WATER: Available at pier facilities alongside the berth in 4 outlets to supply any amount required at any time. Hose connections of 2.5 in. or less, maximum pressure.

FUEL: All grades available.

FIRE PRECAUTIONS: Standard fire and safety precautions throughout. U.S. Coast Guard regulations.

DEVELOPMENTS: it is planned to locate a heavy lift crane on the berth facility.

GANGWAY/DECK WATCHMEN: Ship provides own gangway watchmen.

OPENING/CLOSING HATCHES: By stevedores.

IDENTIFICATION CARDS: Required to go ashore.

CONSULS: Dominican Republic, France, tel. 832-4322. Others at San Juan.

REPAIRS: Call San Juan facilities where complete salvage equipment is available. Service to other ports of the island.

REPATRIATION: Arranged by ship's Agents.

AIRPORT: Mani Airport, 15 minutes from pier, served by regular airlines daily from Mayaguez to San Juan.

TIME: GMT minus 4 hours all year round.

HOLIDAYS: Refer to "San Juan".

POLICE/AMBULANCE/FIRE: Telephone numbers: Police, 343-2020, 832-2300; Ambulance, 832-0496, 832-3212; Fire, 343-2330, 832-2330.

TELEPHONES: Can be arranged by Puerto Rico Telephone Company.

SHORE LEAVE: Allowed.

AUTHORITY: Puerto Rico Ports Authority.

PONCE: 17.58 N. 66.37 W. (See Plan Book)

DOCUMENTS: If vessel staying less than 24 hours:
Crew List.
Stores List.
Cargo Manifests.
Crew Purchase List.
Valid Load Line Certificate.
Ship's Register.
Clearance from Previous Port.

Vessels working cargo: 2 sets of documents to be prepared as follows;

Original:
1 copy of Inward Foreign Manifest (U.S. Customs Form 5727-A), Cargo for San Juan.
1 Stores List.
1 Crew Purchase List.
1 Passenger List (if any).
1 Crew List (U.S. Form 1-418).
1 copy of Ship's in Transit Cargo Manifest.
Clearance from Last Port.

Duplicate:
Same as original except the in-transit Cargo Manifest.
If vessel has on board cargo for another American port, an extra copy of the original Cargo Manifest is required.
Crew members to declare individually all articles such as souvenirs, etc.

Agents require:
3 sets of Bills of Lading.
2 copies of Manifest (for San Juan only).
1 copy of Crew List.
1 copy of Stores List.
1 copy of Crew Purchases List.
1 copy of Narcotics List.
1 copy of Passengers List.

Certificates:
Valid Load Line Certificate.
Ship's Register.
U.S. Tonnage Tax Certificates (if any).

PILOTAGE: Port operations are under the supervision of the Captain of the Port and pilot services are available day and night.

ANCHORAGE: Harbour is protected from the prevailing Easterly trade winds by enclosing reefs. To the Southward the harbour is exposed and for this reason is not safe in a hurricane.

RESTRICTIONS: Depths: Entrance channel 36 ft.; turning basin, 31 ft.; anchorage, 40 ft.

MAX. SIZE: Max. draft 29 ft.

BERTHING: The municipal pier is a concrete and steel construction 430 ft. long by 100 ft. wide, with a steel and cement transit shed. The municipality has also built a concrete bulkhead wharf extending East-West for 2,260 ft. from the pier. To the North of the bulkhead wharf there is a manoeuvring basin 30 ft. deep. Depth alongside: Pier 1A, 30 ft.; Pier 2, 29 ft. 6 in.; Pier 3, 30 ft.; Pier 4, 30 ft.; Pier 5, East-side, 33 ft.; Pier 5, West-side, 32 ft.

FRESH WATER: Water is available whenever ordered in advance for 24 hour daily service or at request during office hours.

FUEL: Available by pipe-line: (Texaco only) diesel, gas oil, No. 6 fuel oil. By trucks (Chevron, Shell, Esso).

MEDICAL: Ambulance permanently available at dock area, hospital and doctors service available as requested to the Agent.

CONSULS:
Colombia
Denmark
Dominican Republic
France
Honduras
Holland
Panama
Spain
Sweden
Switzerland

REPATRIATION: Arranged by ship's Agents.

TIME: GMT minus 4 hours.

HOLIDAYS: Refer to "San Juan".

DEVELOPMENTS: The expansion of the 260 ft. N.-S. bulkhead is completed and length increased to 600 ft. There is a 76 ton gantry crane in operation.

The Trailer wharf is completed. A container crane will be installed early 1979.

The Port Board is working on the development of a dry dock for ship repair.

AUTHORITY: Captain of the Port. Muelles Municipales de Ponce.

SAN JUAN: 18.28 N. 66.07 W. (See Plan Book)

DOCUMENTS: Foreign vessel calling for fuelling purposes and staying less than 24 hours:
Crew List. (Form I-418).
Stores List. (C.F. 1303).
Cargo Declaration. (C.F. 1302).
Crew Effects Declaration. (C.F. 1304).
Valid Load Line Certificate.
Ship's Register.
Clearance from Previous Port.

No Customs formal entry or clearance is required if vessel departs before 24 hours and transacts no other business related to cargo or passengers.

Vessels working cargo. 2 sets of documents to be prepared as follows:

Original:
1 copy of Inward Foreign Manifest (U.S. Customs Form 5727-A), Cargo for San Juan.
1 Ship's Stores Declaration. (C.F. 1303).
1 Crew Effects Declaration. (C.F. 1304).
1 Passenger List (if any).
1 Crew List (U.S. Form I-418).
1 copy of Ship's in-transit Cargo Manifest. (C.F. 1302).
Clearance from Last Port.

Duplicate:
Same as original except the in-transit Cargo Manifest.
If vessel has on board cargo for another American port, an extra copy of the original Cargo Manifest is required.
Crew members to declare individually all articles such as souvenirs, etc.

Agents require:
3 sets of Bills of Lading.
2 copies of Manifest (for San Juan only).
1 copy of Crew List.
1 copy of Stores List.
1 copy of Crew Purchases List.
1 copy of Narcotics List.
1 copy of Passengers List.

U.S. Customs clearances: Documents required:
Cargo Declaration Outward with Commercial Forms C.F. 1302-A.
Crew List in duplicate (American vessels only).
(Functions of admeasurement and documentation of American

vessels are performed by the office of Marine Inspection, U.S. Coast Guard Base, San Juan, Puerto Rico).

Consular clearances for the Dominican Republic:

- 5 copies of Crew List.
- 5 copies of List of Weapons and Ammunitions on board.
- 5 Lists of Passengers.

Consular clearances for Venezuela:

- 6 copies of Store List.
- 8 copies of Crew List.
- 7 copies of Passengers List.

Purser shall supply the Agents with necessary information to fill the inward and out bound cargo reports which have to be filled at Customs House after departure of the vessel.

Customs Inspector requires:

- Valid Load Line Certificate.
- Ship's Register.
- U.S. Tonnage Tax Certificates (if any).

PILOTAGE: Compulsory. Pilots available day and night. Ships' Agents must make arrangements with Pilot station well in advance – not less than 24 hours – of arrival of vessel at harbour entrance. Pilot boats are painted black (hull) and white (topside). Show the letter "P" on each bow. Pilots board 3 miles offshore of sea buoy. Call Pilot station on Channel 16 VHF. There is no inner anchorage for incoming vessels to wait for the Pilot.

ANCHORAGES: Deep draft anchorage "E", on the S.W. shore of Isla Grande, is for vessels awaiting Customs or quarantine, and no vessel shall remain more than 24 hours without a permit from the Puerto Rico Ports Authority and U.S. Coast Guard Captain of the Port. Restricted Anchorage "F" (Fox), shoreward of the West margin of Anegado Channel, is for vessels discharging explosives. No vessel shall anchor without a permit from the Captain of the Port. Anchorage "D", East end of San Antonio Channel, is for yachts, schooners and small craft.

RESTRICTIONS: Besides the harbour entrance channel (Bar Channel) and the main ship channel (Anegado Channel) with depths of 42 ft. and 36 ft., respectively, there are 4 other navigable channels in the inner harbour:

The Army Terminal Channel, which runs in a straight North to South direction is approximately 1 mile long and 300 ft. wide. Charted Depth in the Army Terminal Channel and alongside Piers 1 and 3 is 35 ft., safe draft 33 ft. Depth in other channels varies 30 to 32 ft. and alongside pier facilities 28-30 ft.

The Puerto Nuevo Channel, approximately 1 mile long, 300 ft. wide, with an average depth of 32 ft.

The Graving Dock Channel, approximately 1 mile long, 300 ft. wide, with an average mid-channel depth of 30 ft.

San Antonio Channel, approximately 1.5 miles long, 300 yards wide, mid-channel average depth 35 ft.

MAX. SIZE: Cargo vessels 750 ft. in length call regularly at the Port of San Juan. Channel to tanker's berth, 36 ft.

RADIO: Radio communication to all points, including ships at sea, is available through commercial systems. Cables, Telex via RCA Communications, Inc., a global service of Radio Corporation of America, tel. 723-6170, San Juan, Puerto Rico.

The signal station at Fort San Cristobal in San Juan harbour is manned around the clock for radio-telephone communication with incoming and outgoing ships traffic. Transmitting vessels can communicate with the station through 156.8 mHz (Channel 16) for call and reply and working Channel 14, 156.7 mHz.

Vessels approaching to enter San Juan Harbour shall remain outside not less than 3 miles Northerly of the harbour entrance to pick up the Pilot, and vessels about ready to depart shall inform the signal station via radio-telephone of their intentions.

TUGS: Caribe Tugboat Corp., tel. (809) 723–6164, and Port San Juan Towing Company, tel. 724-2360, operate a fleet of tug-boats. Tugs join vessel just inside harbour entrance. Tugs available day and night with sufficient notice.

Use of tug-boats compulsory for docking and undocking vessels 8,000 tons displacement and over unless equipped with bow or side thrusters.

BERTHING: All vessels must request and obtain well in advance before arrival a berthing permit from the Ports Authority.

Pier 1: North shore of the harbour, in the Old San Juan waterfront, East of Customs Building and next Westerly to the ferryboat landing. Modern twin berth, 770 ft. long, double deck, cruise and passenger vessels terminal, pierside passenger and baggage gangways, elevators, parking and shopping. Water and light facilities available.

Ferry Terminal: Next Easterly to Pier 1. Ferry terminal for the San Juan-Catano ferry fleet.

Pier 3: North shore of the harbour, Old San Juan waterfront next Easterly to the ferry terminal. Tourists ships terminal similar to Pier 1. Depths in the approaches and alongside tourist piers 35 ft.

Wharf No. 6: An extension of the open bulkhead Easterly of Pier 3 marginal wharf, 940 ft. long, accommodates cruise and passengers vessels. Water and light facilities available.

Pier 7: Northerly continuation of Pier No. 6; 472 ft. long, 1 berth, general cargo pier. 15,000 sq.ft. transit shed area.

Pier 8: East of Pier 7, finger pier, 3 berths, general cargo pier. Transit shed area and other covered storage 175,508 sq.ft. open area 40,000 sq.ft. Water and light facilities available.

Pier 9: East of Pier 8. Finger pier, 3 berths, general cargo pier. Net storage space pier shed 133,738 sq.ft. open area 40,000 sq.ft. Water and light facilities available. South berth is a tug–barge terminal.

Pier 10: North shore of San Antonio Channel. East of Pier 9. Finger pier, 1 berth, tug and barge terminal. No transit shed space. Water, fuelling facilities and light available.

Wharf No. 11: East of Pier 10, marginal wharf, 1 berth, 580 ft. of bulkhead, general cargo pier. Transit shed area 100,000 sq.ft. ample back area. Water and light facilities available.

Wharf No. 12: An extension of Wharf No. 11 Bulkhead 550 ft. long, wide apron, 15,000 sq.ft. transit shed area, 37,000 sq.ft. open storage. General cargo wharves. Water and light facilities available.

Wharf No. 13: Prolongation of Wharf No. 12: 28,000 sq.ft. transit shed area, 55,000 ft. open storage area, general cargo wharf. Water and light facilities.

Pier 14: Extension of Piers 12–13 bulkhead; marginal wharf, general cargo pier, wide apron. 446 ft. long, 40,000 sq.ft. transit shed area, ample marshalling area. Water and light facilities available.

Frontier Base Pier: Navy facility operated by the Puerto Rico Ports Authority under contract. 2 berths for sea-going vessels. Depth alongside 30 ft. Principally used for berthing of cruise vessels and conventional ocean carriers handling open storage cargo.

Isla Grande Terminal: South shore of San Antonio Channel. General cargo wharf. 1,500 ft. long bulkhead. Wide aprons. Transit shed 32,000 sq.ft. with 240,000 sq.ft. of paved open area. Easterly section of bulkhead for shallow draft vessels.

Container terminals:

(a) In Westerly section P.R. Maritime Shipping Authority lift-on-lift-off trailership terminal; bulkhead wharf 1,320 ft. long. Wide apron, ample trailers marshalling yards. 2×45 tons capacity container handling cranes. Paved marshalling area approximately 1,800,000 sq.ft.

(b) On the South shore, berthing facilities, 300 ft. bulkhead wharf with adjacent areas for TMT's roll-on/roll-off operations. Shoreside concrete ramp extending out seaward. Tug-barge operation, loading and unloading through bow and side ramps. Max. draft approximately 18 ft.

(c) Interisland Intermodal Inc. roll-on/roll-off shoreside ramp, barge-tug operation; loading and unloading at bow. Max. draft 18 ft.

U.S. Navy property under lease and operated by the Puerto Rico Ports Authority.

Pier 15/16: General cargo pier. Dry dock, floating dock, ship repairs, foundry. 1 wooden floating dry dock of 1,000 tons capacity. Floating crane 25 tons lifting capacity. 4 mobile cranes 45 tons capacity. Reinforced concrete graving dock. Fuel and water available. United States Navy installation under lease to Abarca Dry Dock and Marine Terminals for commercial ship repair and dry-docking operations. Bulkhead wharf and finger pier used by commercial vessels.

Puerto Nuevo Docks: Terminals "A" and "B" marginal wharves. 2×500 ft. berths. 102,000 sq.ft. transit shed area. 2 cargo sheds. 30 ft. depth alongside. General cargo piers. Limited open storage area.

Trailership Terminals: (3 at Isla Grande port zone, above, 10 at Puerto Nuevo port zone. Berths C, E, F, G, H, J, K, L, M and N and West side Army Terminal).

Berth "C": P.R. Maritime Shipping Authority's roll-on/roll-off terminal. Shoreside movable ramps for side loading and unloading. Extra wide pier platform, ample trailer marshalling yards. 30 ft. depth alongside, approximately. Length 600 ft. Width of apron 40 ft.

Berth "D": 100,000 sq. ft. of transit shed space for break-bulk operations and cargo stripping. Marginal wharf 40 ft. wide, 600 ft. long. Ample cargo shed used for distributing cargo coming in trailers for different consignees. Ample trailer marshalling yard. 30 ft. depth alongside, approximately.

Berths "E", "F", "G", "H", "J", "K", "L", "M" and "1/2 N": 600 ft. each, continuous bulkhead wharves, lift-on/lift-off operation. Max. draft alongside 30 ft. Extra wide pier platforms. Ample trailer marshalling yards. Five 25 ton capacity pierside cranes are installed at Berth "E" to "H".

Army Terminal Pier: Finger pier; 3 berths. Approximately 50,000 sq. ft. transit shed area. East and West berths 600 ft. each. North berth 200 ft. Under the control of the Ports Authority. West side, ramp for roll-on/roll-off operation.

Isla de Cabras Pier: Explosives handling pier at Isla de Cabras. Ports Authority property.

Bulk Grain Handling Facilities: Berthing, silos and other shoreside installations for the receipt of shipments of bulk grains (Nebraska Mills, California Rice Mills, Red Seal, etc.).

STEVEDORES: Arranged by the ship's Agents.

MEDICAL: Medical attendance and services are available for seamen at the United States Marine Hospital in San Juan (out-patients). The Presbyterian Hospital handles internal cases.

TANKERS: Caribbean Oil Refinery pile clusters berth, max. permitted draft 33 ft.; Navy Oil Pier, max. permitted draft, 29 ft.

FRESH WATER: Most of the piers have adequate installations to supply water.

FUEL: Served in barges either alongside the vessel at the pier or at anchor. Other combustible liquids are delivered in tank trucks by Shell, Esso and Texaco.

REPAIRS: Abarca Dry Dock and Marine Terminals handles dry docking and major vessel's repairs. San Juan Shipyard and Marina, at Isla Grande, and Vaello Shipyard at La Puntilla, Catano, operate marine railways for dry-docking and repairs of small vessels. The Puerto Rico Lighterage Company handles minor ship repairs.

DEVELOPMENTS: 2 additional trailership berths are under construction at the Puerto Nuevo port sector.

GANGWAY/DECK WATCHMEN: Ship provides own gangway watchmen.

OPENING/CLOSING HATCHES: By stevedores.

IDENTIFICATION CARDS: Required to go ashore.

CONSULS:

Belgium	tel. 725-3179	Honduras	tel. 723-5230
Bolivia	„ 723-0180	Italy	„ 722-4344
Colombia	„ 722-3562	Panama	„ 767-2175
Denmark	„ 725-3885	Holland	„ 723-1442
El Salvador	„ 723-9160	Mexico	„ 724-7812
Finland	„ 722-0283	Sweden	„ 725-1842
France	„ 722-3415, 725-4279	Uruguay	„ 723-1787
		Venezuela	„ 725-4055
Great Britain	„ 767-4435	Spain	„ 722-1045
Dominican Rep.	„ 725-9550, 722-4422	Germany	„ 725-5912, 722-2595

REPATRIATION: Arranged by ship's Agents.

AIRPORT: On outskirts of port area, served by regular airlines.

TIME: GMT minus 4 hours.

HOLIDAYS: *New Year's Day (January 1st); Three Kings' Day (January 6th); De Hostos Birthday (January 11th); Washington's Birthday (February, Third Monday); Emancipation Day (March 22nd); *Good Friday; De Diego's Birthday (April 16th); Memorial Day (May, Last Monday); *Independence Day (July 4th); Munoz Rivera's Birthday (July 17th); *Constitution Day (July 25th); Barbosa's Birthday (July 27th); *Labour Day (September, First Monday); Columbus Day (October 12th); Veteran's Day (November 11th); Discovery of Puerto Rico (November 19th); *Thanksgiving Day (November, Last Thursday); Elections Day (November every 4 years); *Christmas Day (December 25th). Any holiday falling on Sunday is observed on the following Monday.

*No cargo operations on these dates.

POLICE/AMBULANCE/FIRE: Police, 343-2020; Ambulance, 765-9700; Fire, 343-2330.

A Ports Authority ambulance stationed at Pier 14 is available for emergency service.

SHORE LEAVE: Possible, however, Form I-95 is to be prepared.

AUTHORITY: Puerto Rico Ports Authority.

AGENT: Continental Shipping, Inc. P.O. Box No. S-2467 San Juan, P.R. 00903. Cable: Conship. Telex: R.C.A. (325) 2770. Tel. (809) 725-2532.

YABUCOA: 18.02 N. 65.48 W. (See Plan Book)

Man-made harbour and channel located at the S.E. corner of Puerto Rico. Berthing facilities for deep draft tankers and a barge dock. Port and shoreside installations for the receipt and shipment of fuel oils and liquid chemicals for the Puerto Rico Sun Oil Company, a petro-chemical complex and barge dock and shoreside facilities for Union Carbide Graphite of Puerto Rico.

Facilities consist of the following: Ship channel 500 ft. wide, 40 ft. depth. Turning Basin. Dock and operating platform for a max. of 100,000 d.w.t. tank vessels. Mooring, breasting and turning dolphins. Catwalks. Additional dock appurtenances (fire-fighting equipment, protective jetty, etc.). Pilot services available day and night and tugboats available.

AUTHORITY: Captain of the Port, Puerto Rico Ports Authority.

NOTES

Please also advise Shipping Guides Ltd.

Qatar

DOHA: 25.17 N. 51.32 E.

DOCUMENTS: The following documents will be required at this port:

Agents:
1 copy of the Arrival Report (Supplied by the Agent on boarding).
1 copy of the Crew List.
1 copy of the International Declaration of Health.
1 copy of the Passenger List (if applicable).

Port Health:
1 copy of Crew List.
1 copy of Dates and Types of Inoculations.
1 copy if the International Declaration of Health.

Immigration:
4 copies of Lists of Passengers Landing (if applicable).

Customs:
Bonded Store List (Bond will be sealed but issues are available).
Port Clearance Certificate should be procured before the vessel sails.

PILOTAGE: Application for a Pilot should be made through the Agent in Bahrain at least 24 hours before arrival.

Pilot station keeps a VHF watch 24 hours a day on Channel 16. Call sign DOHA PORT. Similar watch kept on R/T 2182 K/cs.

Pilot boat proceeds to the vicinity of the Doha Outer Buoy, position 25° 17′ 06″ N. 51° 41′ 26″ E. when the pilot is required. Pilot launches are painted white. When the vessel is underway the Pilot requires a pilot ladder complete with manropes. When the sea is calm and the vessel is at anchor the accommodation ladder may be used.

ANCHORAGES: Near the Outer Buoy and Southerly from it only. Min. depth of water 5 fathoms.

RESTRICTIONS: Compulsory pilotage for all vessels of 14 ft. draft or more. Naval vessels exempted. Depth of water in entrance is 27 ft. plus tide and the min. depth of water required under the keel for manoeuvring in the channel is 3 ft.

Max. draft for normal or average high waters is 28 ft. 9 in.

MAX. SIZE: Max. length 525 ft., max. breadth 75 ft. max. draft 28 ft. 9 in. Vessels of 560 ft. have been accepted in favourable conditions.

HEALTH: The International Flag signals for pratique must be flown and remain up until the vessel is cleared by the Port Health Authorities. A Port Health Official will board the vessel in the anchorage or at the Deep Water Jetty when the vessel is alongside. There is no automatic or radio pratique available.

RADIO: ETA and Agents messages should be routed through Bahrain Radio. Radio-telephone communications through Doha Port signal station. Calling and listening 2182 kHz. Working frequencies, 2638 kHz, 2738 kHz, 2570 kHz.

TUGS: 7 Government tugs are normally available to assist in berthing operations. The only exception being when the tug is under repair.

BERTHING:
5 Berths – Total length 960 m.; Depth alongside 9.1 m.
5 Berths – Total length 893 m.; Depth alongside 7.5 m.

Outer and inner dredged approach channels, 8.2 m. and 9.1 m. Depth (C.D.). Wharves for smaller craft: West Inner Wharf 207 m., Collins Jetty 135 m.; Country Craft Jetty 287 m.; Fish Factory Wharf 60 m. Depths 2.5 m. to 6.0 m. (C.D.).

Transit storage areas at landward end of approach causeway with extensive paved open storage and transit sheds giving 16,722 sq.m. cover.

New transit storage area under construction, on extended main quay with extensive paved open storage, 5 transit sheds giving 30,000 sq.m. cover, a cold store of 500 tonnes capacity, and services. Completion late 1978 into mid-1979.

Normally berthing and unberthing to and from the deep water jetty is not at any time without certain reservations:
(*a*) Draft and trim of vessel.
(*b*) Height of tide.
(*c*) Visibility from Navigation Bridge.
(*d*) Prevailing weather conditions.

The duty Pilot has the option to berth or unberth a vessel at his discretion after consultation with the Senior Pilot, when the above mentioned conditions are unfavourable.

STEVEDORES: ETA advice is required on the number of gangs workable. Advance notice is required for any heavy lifts (say in excess of 10 tons) and the consignees name if possible as special arrangements have to be made for handling. Average discharge rate is 75 tons per hook day.

MEDICAL: Unless an emergency no advance notice is required. Hospital facilities do exist and a doctor will visit on request. Current Vaccination and Cholera Certificates are required.

DENSITY: The density of the water is salt (1025) at all states of the tide.

FRESH WATER: Fresh water is available in small quantities (50 tons) at the anchorage and larger quantities when alongside the jetty and is supplied by motor tankers.

FUEL: At present time no fuelling available.

GANGWAY/DECK WATCHMEN: The Public Security Department (Police) post a guard at each gangway, but it is advisable the ship also supplies a watchmen. Before landing *every* crew member must lodge his passport or seamen's identity card with the guard when alongside the jetty and at the dock Police Station when at the anchorage.

OPENING/CLOSING HATCHES: This work may be carried out by either crew or stevedores, but usually by the latter.

CUSTOMS ALLOWANCE: Qatar is ''dry'' and no official allowance is made. The bond is sealed on the ship's arrival.

CARGO GEAR: No additional requirements apart from those required by International Law.

IDENTIFICATION CARDS: Discharge Books or Passports are required to be handed to the Police before any crew member may proceed ashore.

CONSULS: The following countries maintain embassies in Qatar:

Iran	U.S.A.	Jordan
Great Britain	Egypt	Yemen
Saudi Arabia	France	Netherlands
Kuwait	India	Tunisia
Iraq		

REPAIRS: Only minor repairs can be carried out. Metal-locking, bottom brushing and underwater welding.

REPATRIATION: Crew changes can be carried out. The Agents will require to know the names, discharge book or passport numbers and necessary information of dates, etc. well in advance for the authorities. Repatriation is normally by air, but Asian crews can be repatriated to Pakistan and India by sea.

AIRPORT: It is about 3 miles from the port to the airport. There are regular flights to Europe, U.K. and India by British Airways, M.E.A. Air India, P.I.A. etc.

TIME: The standard time in Qatar is GMT plus 3 hours.

HOLIDAYS: The holidays in Qatar are usually religious and therefore fall on movable dates. As far as shipping is concerned there are only two days when work is not possible under any circumstances.

POLICE/AMBULANCE/FIRE: Police 4646; Ambulance 5151; Fire 5252.

TELEPHONES: Telephone available at the new Jetty. No. 25782.

GENERAL: Particular attention must be paid to:
(1)The Qatari flag must be flown at all times at the fore mast.
(2) Liquor is not allowed ashore and it is a serious offence to offer alcohol to a Qatari.
(3) Smoking is not permitted in any public places during the month of Ramadan.

SHORE LEAVE: Shore leave is permitted after the Immigration Authorities have cleared the ship and given permission, in writing, on the Crew List. Seamens' documents or passports must be deposited with the police at the gangway and retrieved on returning aboard.

AUTHORITY: Port Department, Ministry of Communications & Transport.

AGENTS: Gulf Agency Co. (Qatar) Ltd., P.O. Box 326, Doha, Qatar. Tel: 25138, 25139. Telex: 4259,

HALUL ISLAND: 25.38.55 N. 52.25.33 E.

Halul Terminal S.B.M. **(See Plan Book)**

Qatar national flag should be flown during hours of daylight.

DOCUMENTS: Master required provide 2 copies of crew list and show Light Dues receipt. All other necessary papers will be supplied on arrival, by Berthing Master.

PILOTAGE: Berthing Master will board incoming vessels in approximate position with Halul lighthouse bearing 270°×2.5 miles (that is to the Eastwards of the island) only. Vessels are requested *not* to pass to the Westwards or the Southwards of the island when approaching the anchorage or pilot cutter, as this is a hazardous area due to numerous underwater pipe-lines. Masters requested provide a good lee for the launch to facilitate boarding of Berthing Master and the lifting on board of equipment.

ANCHORAGE: To the Eastwards of Halul Island centred in a position with Halul lighthouse bearing 270°×2.3 miles. Depth about 80 ft. and bottom sand.

MAX. SIZE: SBM No. 1 up to 65 ft. draft (240,000 tons). SBM No. 2 up to 100 ft. draft (500,000 tons).

HEALTH: If sickness on board, details should be included in ETA message. No Doctor on Halul. In emergencies the services or advice of Company's Medical Officer based in Doha may be obtained. If Medical Officer or patient has to be flown to or from Doha, the tanker concerned will be charged for helicopter hire. Round trip is approximately £80.

RADIO: Vessels should establish communications with Q.P.P.A. (Offshore Operations), Doha, at least 48 hours before arrival Halul Terminal, giving ETA local time and quantity of cargo required in metric tons. Message to ''Petroqat Doha'' via Bahrain Radio. Any changes in ETA should be passed via Bahrain Radio, or if within range through station ''A7S'' (see below).

A private radio station, call sign''A7S'', operated by Q.P.P.A. (Offshore Operations) situated in position 25° 17′ 12″ N. 51° 34′ 39″ E. A continuous listening watch maintained on 500 kHz. Incoming tankers should listen for the ''A7S'' traffic list which is transmitted on 438 kHz at 0400, 0800, 1200 and 1600 hrs. GMT after first calling on 500 kHz. Other details shown in Admiralty List of Radio Stations Volume 1.

A standard information cable is passed to all incoming tankers by station A7S (Alpha-seven-Sierra).

Ship's radio station must not be used while tanker moored to SBM.

VHF: A VHF station on Halul Island, call sign ''Halul Control'', maintains a continuous watch on the International Marine Band, Channel 6. The station has a range of approximately 50 miles and incoming tankers should establish communications with this station as soon as possible. Ship-to-shore communication during loading is by portable VHF Radio telephone provided by the terminal.

TUGS Not available.

BERTHING: Approach is from the open sea, passing to the Eastwards of Halul. There are 2 single buoy moorings. No. 1 SBM in position 25° 39′ 00″ N., 52° 25′ 55″ E. fitted with 2×810 ft.×16 in. floating hose strings and connected to 1×30 in, shore submarine and one double 15 in.×150 ft. nylon floating mooring lines from the buoy. This berth will primarily accommodate vessels up to 120,000 d.w.t., but however, may be used for larger vessels if required. Loading rates of up to 8,000 cu.m. may be given. No. 2 SBM in position 25° 38′ 36″ N., 52° 27′ 35″ E. fitted with 2×885 ft.×24/20 in. floating hose strings and connected to 2 double 15 in.×150 ft. nylon mooring lines from the buoy. This berth will accommodate vessels of over 120,000 d.w.t. with up to a draft of 100 ft. Loading rates of up to 15,000 cu.m. will be given. In both berths, mooring lines from the buoys are secured on the forecastle head using equipment provided by the terminal. A suitable messenger rope should be ready for use. No moorings are used aft. The Berthing Master will advise in detail the mooring procedure.

Hose Connections: No. 1 SBM amidships port side 2×16 in. hoses. Hose derrick should be rigged to lift at least 10 tons and 2×16 in. reducers should be fitted on the port side only.

No. 2 SBM amidships, starboard, side 2×20 in. hoses. Hose derrick must be rigged to lift at least 10 tons and 2×20 in. reducers should be fitted on starboard side only.

Hose connection carried out by ship's personnel with advice from Berthing Master. Tankers *not* permitted to immobilise main engines or auxiliaries whilst moored to SBMs.

DENSITY: At berth, 1028/1030 (approximately).

CARGO: Flash point below 32° Fahrenheit.

H_2S content. Masters should refer to the International Oil Tanker and Terminal Safety Guide Section 1. 4. 2. on the subject quoted here for easy reference.

1.4.2. Hydrogen Sulphide – H_2S. Hydrogen sulphide has a disagreeable odour characteristic of rotten eggs which quickly deadens the sense of smell so that a dangerous concentration may be present which cannot be detected by odour.

If exposure to hazardous concentrations of this gas is likely to occur, appropriate safety precautions should be taken. Suitable respiratory protection should be available during ullaging and sampling.

The TLV is given as 10 p.p.m. but concentrations in enclosed spaces should be reduced as far below this level as practicable and if men are to work without breathing apparatus, a nil concentration should be achieved before entry is permitted and effective ventilation should be maintained.

On tankers regularly committed to the carriage of sour crude, H_2S gas indicators should be provided.

It is important to realise that the concentration of H_2S can be measured and expressed in two different ways.

the p.p.m. in the liquid, by weight;

the p.p.m. in the air, by volume.

Producing and processing departments at terminal often use the liquid measure for H_2S content, and this could be confusing to tanker officers who usually think of H_2S as expressed in air volume measure. There can be a vast difference between the two measures. The measure in air is higher and can be very much higher. For example, chemists have measured a concentration of 7,000 p.p.m. (deadly) in the vapour stream coming out of ullage opening when a tank is being topped off with a crude oil containing only 70 p.p.m. H_2S in the liquid. Therefore, it is of vital importance to appreciate that a sour crude can release a lethal concentration of H_2S into the air.

The following guide to the effects on exposed persons of various atmospheric concentrations of H_2S gives some indication of its dangers:

Measured in air by volume	
50 to 100 p.p.m.	Eye and respiratory tract irritation after exposure of 1 hour.
200 to 300 p.p.m.	Marked eye and respiratory tract irritation after exposure of 1 hour.
500 to 700 p.p.m.	Dizziness, headache, nausea, etc., within 15 minutes; loss of consciousness and possible death after 30 to 60 minutes exposure.
700 to 900 p.p.m.	Rapidly produces unconsciousness and death occurs a few minutes later.
1000 to 2000 p.p.m.	Death is apparently instantaneous.

Apparent death from H_2S is not irreversible as prompt and efficient artificial respiration may restore life.

The terminal should advise the Master if the cargo to be loaded contains H_2S in concentrations which cause the gases vented during loading to be hazardous if inhaled. When handling cargo with noticeable H_2S content or when ballasting after discharge of such cargo, it is recommended that the following precautions should be taken.

The officer supervising the operations should keep a sharp watch on personnel for signs of fatigue or distress.

Lifelines, breathing apparatus and resuscitator should be readily available.

Loading through the pumproom should be avoided where possible to reduce the possibility of H_2S contamination of the pumproom atmosphere.

Gas should be vented through the cargo tank venting system and, if open ullaging is necessary, the ullage plugs should be kept open only for a minimum period of time.

When ullaging tanks, personnel should work in pairs and stand at right angles to the wind direction in relation to the ullage opening.

Personnel should not enter a pumproom without first starting the ventilation, checking that there is no gas present, and without someone else standing by. If any gas concentration is recorded, a self-contained breathing apparatus should be worn.

Other spaces into which H_2S may have been drawn should be ventilated and checked before entry.

Persons overcome by H_2S should be moved to a gas free area immediately and artificial respiration should be administered at once.

Gas tests should be made on deck and in accommodations at regular intervals and particularly during the topping-off periods. If concentrations exceed 10 p.p.m. inside the accommodations or 50 p.p.m. on deck more than 10 ft. from a gas outlet, the loading rate should be adjusted and if this does not result in a decrease of the gas concentration, loading should be stopped until conditions have improved or other suitable measures are taken.

During discharge, the pumproom bilges should be kept dry.

During loading or ballasting operations, conspicuous notices warning of potential danger should be posted on deck and at pumproom entrance, and at the entrance to any other space which could be affected.

TIME: Local time is GMT plus 3 hours.

FRESH WATER: Not available.

FUEL: Not available.

REPAIRS/STORES/LAUNDRY: Not available.

TANK CLEANING: No facilities available and ships must arrive with clean ballast, lines and pumps.

CUSTOMS: Trading in liquor is *strictly* prohibited and no alcoholic drink should be offered to Arab nationals.

SHORE LEAVE: Not permitted.

AUTHORITY: Qatar Petroleum Producing Authority (Offshore Operations).

UMM SAID: 24.54 N. 51.34 E. (See Plan Book)

DOCUMENTS:

Health Declaration.
Crew Lists.
Light Dues Receipt.
Other necessary papers supplied on arrival.

BUOYED CHANNEL: All vessels wishing to navigate the Umm Said buoyed channel must obtain prior clearance from Umm Said Control who can be contacted on VHF Channels 14 or 16 or by Telex via Bahrain Radio, addressed to Petroqat Umm Said. This precaution is essential to avoid unexpected encounters with deep-laden oil tankers.

APPROACHES:

Umm Said Approaches

Light Buoys	*Latitude North*	*Longitude East*	*Shape*	*Colour*	*Light*
Kareinein (K)	25° 24′ 18″	51° 56′ 16.4″	Pillar	Red with Letter K and Radar Reflector	Fl. 10 sec.
Mishut (M)	25° 15′ 51″	51° 46′ 43.4″	Pillar	Black with White Letter M	Gp. Fl. (2) 20 sec.
Wakrah (W)	25° 09′ 17″	51° 41′ 50.4″	Can	Red and White vertical stripes with Letter W	Gp. Fl. (3) 20 sec.
Hul (H)	25° 02′ 49″	51° 41′ 50.4″	Can	Red with Letter H	Gp. Fl. (4) 20 sec.
No. 1	25° 01′ 01″	51° 42′ 6.4″	Conical	Black	Fl. 6 sec.
No. 2	25° 00′ 55″	51° 42′ 15.9″	Can	Red	Fl. R. 5 sec.
No. 3	25° 00′ 40.6″	51° 42′ 13.1″	Conical	Black	Fl. 1 sec.
No. 4	25° 00′ 36,3″	51° 42′ 22.9″	Can	Red	Fl. R. 1 sec.
No. 6	24° 59′ 44″	51° 42′ 26.4″	Can	Red	Gp.Fl. (2) R 10 sec.
No. 7	24° 58′ 10″	51° 42′ 29.4″	Conical	Black	Fl. 6 sec.
No. 8	24° 58′ 18″	51° 42′ 37.4″	Can	Red	Fl. R. 6 sec.
No. 9	24° 56′ 39″	51° 42′ 4.4″	Conical	Black	Gp. Fl. (3) 15 sec.
No. 10	24° 56′ 35″	51° 42′ 20.4″	Can	Red	Gp. Fl. (2) R. 10 sec.
No. 11	24° 55′ 42,5″	51° 42′ 11.9″	Conical	Black	Fl. 2 sec.
No. 12	24° 55′ 43″	51° 42′ 20.9″	Can	Red	Fl. R. 2 sec.
S.E. Arrif	24° 53′ 38″	51° 43′ 4.4″	Conical	Black	Gp. Fl. (3) 15 sec.
S. Arrif	24° 51′ 02″	51° 40′ 57.4″	Conical	B.W. Cheq.	Fl. 5 sec.
No. 1	24° 52′ 29″	51° 40′ 2.4″	Conical	Black	Gp. Fl. (3) 15 sec.
No. 2	24° 53′ 36″	51° 39′ 54.4″	Can	Red	Fl. R. 6 sec.
No. 3	24° 54′ 11″	51° 39′ 53.4″	Conical	Black	Fl. 2 sec.
No. 4	24° 54′ 7.3″	51° 39′ 47.4″	Can	Red	Gp. Fl. (3) 15 sec.
Turning Buoy	24° 54′ 41″	51° 39′ 19.4″	Can	R. W. Cheq.	Fl. R. 3 sec.
E. Anchorage	24° 54′ 23″	51° 36′ 20.5″	Can	Red	Gp. F. (2) R. 10 sec.
S. Anchorage	24° 52′ 53″	51° 33′ 51.4″	Can	Red	Fl. R. 6 sec.
M.B. 1	24° 53′ 57.6″	51° 33′ 36.0″	Conical	White	Fl. 5 sec.
M.B. 2	24° 54′ 16.8″	51° 34′ 13.8″	Conical	White	Fl. R. 5 sec.
M.B. 3	24° 54′ 19.8″	51° 34′ 37.8″	Conical	White	Fl. 5 sec.

Approach to Umm Said Terminal: With Halul Island peak astern steer 235° for a distance of 31.5 miles to (K) 'Kareinein' light buoy in position Lat. 25° 24′ 18″ N., Long. 51° 56′ 16.4″ E., thence 226°, 12 miles to (M) 'Mishut' light buoy in position Lat. 25° 15′ 51″ N., Long. 51° 46′ 43.4″ E.

From 'Mishut' light buoy steer 214° for a distance of 8 miles to (W) "Wakrah" light buoy, leaving this light buoy on the port hand.

From "Wakrah" light buoy steer 180° for a distance of 6.4 miles, to (H) "Hul" light buoy leaving this buoy to port.

From a position of two cables West of (H) "Hul" light buoy, steer 164° for a distance of 1.9 miles to pass between Nos. 1 and 2 Outer Channel buoys, thence 158° 30', 0.3 miles to pass between Nos. 3 and 4 Outer Channel buoys, thence 178°, 0.9 miles to leave No. 6 Outer Channel buoy on port hand, thence 173°, 1.6 miles to pass between Nos. 7 and 8 Outer Channel buoys, thence 191° 30', 1.6 miles to pass between Nos. 9 and 10 Outer Channel buoys, thence 176°, 0.8 miles to pass between Nos. 11 and 12 Outer Channel buoys.

From a position midway between Nos. 11 and 12 Outer Channel buoys, steer 157° for a distance of 2.2 miles, leaving "S.E. Arrif" buoy on the starboard hand, thence 217° for a distance of 3.25 miles, leaving "S. Arrif" buoy on the starboard hand.

After rounding "S. Arrif" buoy, steer 335° for a distance of 1.7 miles, passing close West of No. 1 Inner Channel buoy, thence 003°, 1.1 miles, passing close East of No. 2 inner Channel buoy.

From a position close East of No. 2 Inner Channel buoy, steer 348°, 0.5 miles to pass between Nos. 3 and 4 inner Channel buoys thence 323° to round "Turning" buoy, leaving this buoy on the port hand.

From "Turning" buoy steer a course to enter either the "Large Tanker Anchorage" or "Small Tanker and Freighter Anchorage" as applicable. The Northern limit of the Large Tanker Anchorage is a straight line joining the "Turning" buoy and "East Anchorage" buoy positions.

Masters of vessels are requested *not* to anchor outside these areas and to keep the fairway clear at all times.

Outward Passage: The reverse track is followed as for the inward passage described above.

Speed must be reduced before rounding the "Turning" buoy and the passage in the Inner Channel must be made at slow speed to avoid increase of draft due to "draw down" or "heel under helm".

The Outer Channel should also be taken at moderate speed to avoid "draw down" and "canal action" when passing close to shoal patches.

Charts: Admiralty Chart No. 3787 – Ras Abu al Mishut to Fasht al Arrif.

Admiralty Chart No. 3950 – Fasht al Arrif to Ras Laffan.

Depths: In the Outer Channel there are least depths of 37 ft. (11.28 m.) in the vicinity of Nos. 1 and 2 buoys, 3 and 4 buoys and Nos. 9 and 10 buoys.

Between the Outer and Inner Channel the depth varies from 40 ft. (12.2 m.) at Nos. 11 and 12 Outer Channel buoys through 72 ft. (22.0 m.) and 78 ft. (23.8 m.) between "S.E. Arrif" and "S. Arrif" buoys to 47 ft. (14.3 m.) close to No. 1 Inner Channel buoy.

In the Inner Channel the least depth is 38 ft. (11.6 m.) between Nos. 3 and 4 Inner Channel buoys.

From the Inner Channel to the Anchorage the depths vary from 43 ft. (13.1 m.) between the Channel and "Turning" buoy to 48 ft. (14.6 m.) at the Anchorage.

Tidal Conditions: In general the flood stream sets to the S.S.W. and the ebb stream to the N.N.E. the rate being up to two knots at Springs.

Cross sets will consequently be experienced in the channel, more particularly in the Northern part of the Outer Channel, between the Outer Channel and "S.E. Arrif" buoy and between "S. Arrif" buoy and the "Turning" buoy. It should be noted that at the Outer Channel entrance the flood stream continues to set to the Southward for some time after the tide has started to fall.

Tides: The tides in this area have a large diurnal component and at times there is only one high water and one low water in the twenty-four hours. This irregularity is more pronounced at Umm Said than at the Outer Channel entrance for which predictions are made.

In December the higher high water, or the only high water during periods of single day tides, occurs between 0500 and 1400 hrs.; in March between 2200 and 0900 hrs.; in June between 1800 and 0100 hrs. and in September between 0900 and 2100 hrs.

At Umm Said there are a few days in the year when the tide does not rise above 5 ft. (1.52 m.) and there are considerable periods each day when the predicted height of the tide is greater than 3 ft. (0.91 m.).

In the vicinity of Nos. 3 and 4 Inner Channel buoys, High Water occurs about 1 hour after High Water at the Outer Channel entrance and the rise of tide is slightly more than at the Outer Channel entrance.

The Higher High Water is normally 5 ft. (1.52 m.) or better rising to 8 ft. (2.44 m.) at exceptional Springs.

Abnormal Meteorological conditions may affect all the above tides by ±2 ft. (0.61 m.).

PILOTAGE:

Inward: Except on special request Pilots are not provided for the inward passage. Vessels should proceed to the appropriate anchorage, having first received clearance from Umm Said Terminal to enter channel. This is to ensure that all outward bound vessels are aware of traffic movements in channel. Pilot will board incoming vessels at "W" Wakrah Buoy, if requested.

Outward: Compulsory for all vessels carrying flammable, toxic, or dangerous cargoes.

Tankers of 40,000 d.w.t. and over should have rigged, when in light condition, an accommodation ladder lowered to about 12 ft. above the water. This can be adjusted to suit conditions. A Pilot ladder should be rigged immediately abaft the accommodation ladder, to within 2 ft. above the water. This will enable Pilot to ascend Pilot ladder clear of launch, and then step on to lower platform of accommodation ladder. Vessels should comply with the current U.K. Merchant Shipping (Pilot Ladders) Rules.

When automatic Pilot hoists are used for embarking and disembarking a responsible English-speaking officer must always be in attendance.

Pilotage is compulsory for dry cargo ships bound for Umm Said anchorage. Pilotage performed by Doha Pilots.

ANCHORAGE: Eastern Anchorage. Depth 48 ft.

RESTRICTIONS: Mooring and unmooring normally restricted to daylight hours.

MAX. SIZE: Draft of laden tankers leaving Umm Said controlled by depth at outer end of Outer Channel. This is 3~~7~~6 ft. (11.28 m.) below Chart Datum and Zero of Predictions. Tide rarely falls below 1 ft. above datum, so that there is normally 3~~8~~7 ft. (11.58 m.) or more in the channel.

Experience shows that even under the worst weather conditions there is no appreciable movement on larger ships in Outer Channel. As deep-draft vessels always reduce speed between Nos. 3 and 4 Inner Buoys and in Outer Channel, there is very little "draw down". Deep-draft vessels should endeavour to pass between Nos. 1 and 2 Outer buoys at higher high water for the Outer Channel entrance. In general, limitations are as follows:

(*a*) Ships drawing 35 ft. (10.67 m.) or less can sail at any time on any day.
(*b*) Ships drawing 36 ft. (10.97 m.) will rarely have to use tides.
(*c*) Ships drawing 37 ft. (11.28 m.) will usually have to use tides.
(*d*) Ships drawing 38 ft. (11.58 m.) always have to use tides.
(*e*) Ships drawing 39 ft. (11.89 m.) will occasionally be neaped.
(*f*) Ships drawing 40 ft. (12.19 m.) will be neaped 120 days ± a year.
(*g*) Ships drawing 41 ft. (12.15 m.) can sail occasionally. The best months are June and July.
(*h*) Ships drawing 42 ft. (12.80 m.) are not worth programming as on the few days when predictions indicate they could sail, meteorological conditions may well cut the tides.

Underkeel Clearance: The following table stipulates the *minimum* underkeel clearance for vessels using the Umm Said Channels entering inward and departing outward.

Vessels up to 99,999 d.w.t.	—	3 ft. Clearance
Vessels from 100,000 to 149,999 d.w.t.	—	4 ft. Clearance
Vessels over 150,000 d.w.t.	—	5 ft. Clearance
L.P.G. Carriers (all sizes)	—	5 ft. Clearance

Navigation in shallow waters: The navigation of deep drafted vessels at high speeds in shallow waters introduces certain hazards. Pilot/Mooring Masters and Masters of ships should be guided by the following:

(*a*) Due consideration should be given to the effect of draw down at speed on vessel's draft in shallow water, bearing in mind vessel's trim.
(*b*) If possible, confirm actual height of tide against predictions and if not, bear in mind that after strong winds the actual height of tide may be reduced and extra caution must be exercised for a few days during and after bad weather.
(*c*) Ensure accuracy of vessel's draft reading, including the midship drafts, having in mind the tendency of vessels to sag and the adverse effect of a small list.
(*d*) Reduce to a minimum safe speed to pass over and near shoal areas.
(*e*) Reduce to a minimum safe speed when negotiating turns in order to reduce heel under helm.
(*f*) Note that list can mean an appreciable increase in draft.
(*g*) When strong tidal streams are running across a channel, extra vigilance is required, and allowance made for set, particularly at reduced speed, to ensure vessel proceeds along mid-channel.

HEALTH: (Quarantine and Medical Clearance). The Medical Officer of Qatar Petroleum Company Ltd. will carry out these duties. Medical attention to Masters and crews of ships provided by Q.P.P.A. Medical Officer when asked for by Master.

RADIO: When advising their ETA ships must state their last port of call within the previous 21 days and report any sickness on board. If the last port of call is Bahrain or Ras Tanura, the previous port must be stated.

Vessels are requested to inform Petroqat, Umm Said by cable of their ETA at (W) Wakrah Light buoy and whether or not Pilot required, 72 hours and confirm 24 hours prior to their arrival. It should be clearly indicated that times quoted are in GMT. They should also state the quantity of cargo, in long tons, and the maximum loading rate required.

These cables should be addressed to Petroqat, Umm Said, and passed via the Bahrain Coast Radio Station.

VHF: The Umm Said Terminal is equipped to operate on five channels of the International Maritime Mobile Telephone Service as follows:—

Channel No.	Transmit/Receive Frequency mc/s
9	156.45
11	156.55
12	156.60
14	156.70
16	156.80

A continuous listening watch is maintained on Channels 16 and 9, the call sign being "Umm Said" and the range of station is approximately 50 miles.

Berth Radio Frequency: Tanker berthing/loading operations are carried out using Pocketfones on a frequency of 155.975 mc/s transmit and receive. These Pocketfones are classed intrinsically safe and also have the facility of use on Channels 14 and 16.

TUGS: Given sufficient prior notice a tug can usually be made available on request.

BERTHING: Pilots act in same capacity as Mooring Masters in the berthing of vessels, after which they supervise raising of flexible hoses and connection to ship's manifold. During loading operation they act as company's representatives.

Vessel's crew are expected to assist with hose connecting.

North Berth is a Single Point Mooring in Position 24° 53′ 37.2″ N., 51° 34′ 54″ E. connected to the shore installation by a 36 in. submarine pipe-line. The seaward end of the pipe-line and buoy terminates in two 16 in./12 in. flexible floating hoses. Vessels are moored by a single hawser from bow to buoy.

The following equipment should be carried by each vessel:

(i) One 4 in. circumference × 40 fathom messenger rope ready for use at the bow together with mooring lines of suitable size ready for use.

(ii) One good boat rope at least 200 ft. long ready at accommodation ladder position.

(iii) Derrick or crane rigged over the starboard side manifolds should be capable of lifting 16 in./12 in. floating hose to a height of up to 30 ft. above deck (S.W.L. 10 tons).

(iv) Reducers or adaptors if necessary to be bolted to 2 ship's flanges so as to take 12 in. hoses.

Warning: Ship's anchors must never be used within 0.5 mile of this berth or the 36 in. submarine pipe-line and must therefore be well secured at all times.

The South Berth consists of a Conventional Buoy Mooring, connected to the shore by a 24 in. submarine pipe-line. The seaward end of the pipe-line terminates in two 12 in. flexible hoses. Vessels are moored at this berth by ship's anchors and mooring buoys. The following equipment should be carried by each vessel.

(i) Port and starboard anchors to be fitted with marker buoys and sufficient line. This will facilitate recovery of anchor in the event of loss.

(ii) 2 good boat ropes at least 200 ft. long ready for use on each side.

(iii) A good line by the pilot ladder for hauling on board equipment such as hose clamps, wrenches, reducers and elbows.

(iv) 4 good mooring lines aft, of a suitable size for the vessel on which they are used. Each line should consist of 120 fathom hawser, tailed by a similar hawser and ready to run out when required.

(v) 2 good mooring lines forward similar to the after lines for use on breast buoy.

(vi) 2 good rope stoppers to be available forward. 4 good rope stoppers to be available aft.

(vii) Derricks or cranes reaching over the hose connection should be capable of lifting 12 in. flexible hose from the sea-bed to a height of up to 30 ft. above deck (S.W.L. 5 tons).

(viii) Reducers or adaptors to be bolted to ship's flanges, so as to take 12 in. hose.

(ix) Carpenter's stoppers are provided on loan by Q.P.P.A. for use with Authority's 4.75 in. wires, and chain stoppers should not be used.

Note. Where a vessel has 2 or more loading connections, the ship's flanges should not be less than 4 ft. apart.

TERMINAL INFORMATION:

Berth	*Max. t.p.h.*	*Fixed sea-line*	*Overrall hoses*
North (SPM)	4,300	One – 36 in.	Two – 12 in.
South (CBM)	3,800	One – 24 in.	Two – 12 in.

Depth of water: Available depth of water at seaward end of sea-line is as follows:

North Berth (SPM)	65 ft. (19.6 m.)
South Berth (CBM)	44 ft. (13.41 m.)

An allowance of 8 ft. for South Berth has been made for height of sea-line end cradle above the sea bed.

Berth limitations:

North Berth (SPM) –	Bow to manifold 590 ft.
South Berth (CBM) –	Head North – All vessels under 900 ft.
	Head South – All vessels under 1,100 ft.

After the vessel has been securely moored in berth, the hoses are lifted and connected to the ship's manifold.

The Mooring Master will not transmit any loading instructions to the shore until the officer-in-charge of the deck is satisfied that the hoses are connected correctly and that all valves have been set for receiving cargo.

While in berth, ships should be ready to move under their own power in the event of their breaking adrift, catching fire, fire in adjacent berths or other emergency. No repairs should be carried out while in berth which would immobilise the ship or impair her fire-fighting efficiency.

The Mooring Master will instruct the Master of the vessel as to any signals needed for local requirements.

The Mooring Master brings a portable radio to the ship.

The radio may not be used for private conversation. Use of the ship's radio while at the loading berth is strictly prohibited.

When loading is completed, hoses will be disconnected and lowered, under the supervision of the Mooring Master.

Ships will then proceed to an anchorage allocated by the Mooring Master or direct to sea.

L.N.G. Jetty: This is a 'T' type jetty with breasting dolphins flanked either side by 2 mooring dolphins. Water depth at the berth is 42 ft. Chart Datum.

BULK HANDLING FACILITIES: A Government Jetty has been constructed in Umm Said Bay connected to a Fertiliser Production Plant and grain mill. There are facilities alongside the quay for loading bulk urea and bagged urea; for loading refrigerated liquid ammonia; discharging bulk grain.

Vessels up to 60,000 d.w.t. may be accepted alongside.

The jetty is 700 ft. long, 100 ft. wide; the deck level being 20 ft. 3 in. above. Admiralty Chart datum. There is a least depth of 40 ft. alongside.

Government Pilots provide berthing assistance. See "Doha".

Operational Equipment:

Ammonia Arm: One 10 in. liquid ammonia loading arm and one 6 in. vapour loading arm at a fixed point serving the North berths.

Ship Loaders: 2 loading mobile machines (ship loaders) serving the whole of South side of the jetty, one of which is capable of loading bulk urea.

Grain Unloading: 6 unloading points for connecting 2 mobile grain unloading machines.

Conveyor: System for export of bagged and bulk urea and import of grain.

Crane: 10-ton swl dockside mobile crane serving the whole of the North side of the jetty.

Also see "Developments"

CARGO:

1. Flash Point. Flash point of Qatar crude is below 32° Fahrenheit.

2. H_2S Content. Qatar crude contains concentrations of H_2S (sulphuretted hydrogen). This is an evil-smelling poisonous gas which can be lethal depending on concentration of gas in the air inhaled. It can be detected normally by smell, but a high concentration of the gas rapidly paralyses sense of smell and may lead to a false sense of security. It is, therefore, important that when the presence of the gas is detected the area or compartment concerned must be left with all possible despatch until adequate ventilation can be carried out. *The explosimeter will not detect this type of gas.* The foregoing should be dealt with in the light of experience where large quantities of crudes of this type have been carried without accident and we do not wish to exaggerate the dangers. The under-noted precautions have been evolved as necessary to provide against a possible accident.

(a) During loading gas should only be allowed to escape via the agreed venting arrangements.

(b) When ullaging tanks, personnel should keep windward of the tank opening and avoid breathing fumes as much as possible. If H_2S is inadvertently inhaled the man should leave the area and not return until his sense of smell has been restored.

(c) No one should enter any pump room or any compartment where gas could collect unless another person is standing. by.

(d) Lifelines, breathing apparatus and resuscitator should be readily available.

(e) As a precautionary measure, the gas ejector for the pump room should be put into operation at any time entry is made into this space whilst the possibility of H^2S gas entering pump room from cargo or empty tanks exists.

LOADING:

Readiness. Notice of Readiness will be received by Authority Representative provided vessel ready to load. Lay time will commence as stipulated in the export agreement between purchasers and vendors. A full cargo is deemed to be the maximum cargo which can be loaded in your ship at Umm Said consistent with safe underkeel clearance on sailing, as advised by Mooring Master.

The Authority will make every effort to load tanker on arrival provided berth available and weather permitting.

Advice from vessel which states she is ready to receive cargo is considered as final, and as indicating that every operation necessary aboard vessel has been completed. As soon as possible after such a signal has been received, and without further advice, loading will commence. Damage to hoses can occur if ship's valves are not open at the start of loading. To prevent excessive pressure from surge to ship/shore connections, ship's valves should be operated slowly.

Full cargo is deemed to be the maximum cargo which can safely be loaded in the vessel at Umm Said. Completion of loading is subject to the normally accepted tolerances above or below the required cargo.

Tank Dips. During loading, hourly checks of vessel's tanks shall be made by ship personnel to determine cargo loaded for comparison with shore figures if required. This is to prevent loss of oil through a leaking hose and particularly applies at night when seepage of oil can remain unobserved.

Inspection of vessel's tanks will be made by a ship's officer before loading and, if required, by a Q.P.P.A. Representative. Opening dips and closing ullages will be taken by ship's personnel and the quantity of cargo calculated.

Particular care must be exercised by ship's personnel, towards completion of loading, in the "Topping off" of tanks to ensure that the Terminal is given timely advice of any decrease in pumping rate required. Adequate "Stand-by" notice should be given before the final "Stop".

Loading Pumps. Two 1,200 h.p. pumps are used to load crude oil and it is important to note that any rapid changes in the oil velocity may cause pressure surges in the loading system. A pressure surge may rupture the flexible hoses connected to your vessel spilling dangerous quantities of crude oil onto the decks or surrounding areas. To avoid these risks, valve operations and tank switching should be done with extreme care. Please ensure that 15 minutes notice is given for "Slow Speed" and/or "Stop" instructions.

BALLAST: When a vessel enters port waters in ballast, the ballast water for overside discharge *must be clean* and a declaration signed by the Master and delivered to the representative of the Terminal to this effect. Oily wastes, oily water or other refuse must not be discharged overboard in port waters. Vessel's scuppers must be effectively plugged and leakage or spillage of oil aboard ship must not be swept or washed overboard whilst in port waters.

The attention of Masters is drawn to the volume entitled "International Conference on Prevention of Pollution of the Sea by Oil" 1962 and subsequent publications issued by the International Maritime Consultative Organisation.

Vessels are subject to heavy fines and liabilities for claims arising from pollution of the sea and shore areas.

In Umm Said the "load on top" system is normal procedure and Masters of all tankers are required to certify quantity of slops on board and their intention of "loading on top". If "load on top" system is not used the Master will be required to certify adequate reasons for not doing so, e.g., vessel drydocked in last port, etc.

(a) Essential that vessel is adequately ballasted to ensure safe handling and manoeuvring. Please comply with Mooring Master's requests as to ballast quantity and disposition.

(b) Umm Said is an open roadstead and subject to sudden changes in weather. On occasions it is of great advantage to commence loading whilst discharging ballast or prior to completely deballasting to avoid having the vessel in a flying light condition.

(c) All pump-room seacocks must be closed before commencement of loading.

FUEL: Bunkers not available.

FRESH WATER: Not available.

CUSTOMS ALLOWANCE: The State Laws of Qatar are very strict about the import of liquor and its consumption both on the mainland and on vessels in the harbour. No employee, whether senior or junior, is permitted to import any liquor direct or to bring any liquor ashore from vessels, and under no circumstances should liquor be offered for consumption on your vessel to any Q.P.P.A. employee unless he is of senior staff status. At the present time vessels enjoy the privilege of not having to seal their liquor stocks whilst in port, but you will readily appreciate that this privilege would be withdrawn if the above rules are not strictly observed whilst vessel is at Umm Said.

REPATRIATION: Immigration/Transit facilities for arriving or departing ship personnel are good. Ample notice should be given on passport details to ensure minimum delay to travelling personnel.

DERATISATION: No facilities.

DISCHARGE CERTIFICATE: The Master of every vessel loading at Umm Said is handed a Discharge Certificate for completion by the Customs or Port Authority at port of discharge and return by air mail to Qatar Petroleum Producing Authority (Onshore Operations), P.O. Box 10070, Umm Said within 40 days of sailing from Umm Said. Instructions regarding the cable to be sent after discharging a cargo loaded at Umm Said must be strictly followed. It must be emphasised that failure to comply with this requirement may result in delay or even boycott of the vessel upon return to Qatar. It is therefore in best interest to ensure that Agent at port of discharge attends to despatch of this certificate with least possible delay. Airmail should be used for Certificate posting.

SECURITY: The Government of Qatar and the Authority are anxious to ensure that unauthorised persons do not board vessels loading at Umm Said. Vessel's co-operation is requested in checking the identity of all persons boarding.

Vessels are particularly advised to keep all points of access to vessel under surveillance at all times, and to provide maximum night illumination of vessel insofar as the safety regulations permit.

A State Police Launch is present in the area and may be available for assistance if required.

DEVELOPMENTS: The new Umm-Said port, opened in 1977, has a total water frontage of 4.5 km. of which 2.5 km. has been developed to provide deep-water berths and a harbour for small craft. Three berths at the Northern end having 15.5 m. minimum depth of water at MLLW are reserved mainly for the requirements of Qatar Steel Company and two berths at its Southern end having 13.0 m. minimum depth of water are reserved mainly for the requirements of Qatar Petrochemical Company. Three additional berths having 13.0 m. and two berths having 10.0 m. minimum depth of water at MLLW are available for specialised and general cargoes.

Inner approach channels and manoeuvring areas have been dredged to serve all berths in the new Port.

In addition there are wharves under construction which will be used by general cargo vessels, Ro/Ro vessels, car carriers and container vessels.

A chemical plant is also being constructed.

AGENT: Agency carried out by Qatar Petroleum Producing Authority.

NOTES

Please also advise Shipping Guides Ltd.

Reunion Island

POINTE DES GALETS: 20.55 S. 55.17 E.

(See Plan Book)

PILOTAGE: Compulsory for all vessels of over 50.0 m. LOA. Pilot is normally ordered by ship's Agent, or in particular cases by the Harbour Master if contacted by VHF beforehand. Pilot launch carries regulation pilot signals. Pilot boards at the entrance to the port about 1 mile from the breakwaters.

APPROACHES: *Channel and Buoyage:* The leading line 102° 30' for entry is determined by day, but 2 rectangular white signs, bordered in red with a thick black line denoting the centre line. At night the leading line is 2 red lights. In the channel the depth is 10 m., 70 m. wide and is buoyed by 4 spars, 2 on each side.

The leading marks for access to the North Port, South and Fishing Port, respectively 009°, 189° and 260°, are marked as shown below:–

North Port:– by day, 2 red rectangular signs, with a thick white line marking the centre line, at night, 2 fixed red lights.

South Port and Fishing Port:– 2 rectangular white signs with a black vertical line marking the centre line by day. 2 fixed green lights by night.

ANCHORAGE: There are 3 anchorages in the roads near the port.

(*a*) In Baie de St. Paul in depths of about 40 m., well marked and safe except in very strong swell.

(*b*) South of the port entrance in the immediate approaches, depths of 40 m., only used in fine weather and calm sea.

(*c*) In Roads of La Possession unmarked anchorage and little used.

If vessel requires a Pilot for anchoring, then anchorage dues are incurred. Vessels anchoring by their own means do not incur charges.

RESTRICTIONS: Manoeuvring is best done in the evening because during the day a wind can make movement difficult. The current in the channel varies in strength (between 1 and 2 knots) and direction. Its direction can only be determined by careful observation during the approach. As a consequence ships should be ready to anchor on instruction from the Pilot while transiting the channel. Vessels swing in the outer port using starboard anchor.

MAX. SIZE: Under certain conditions, the topography of the port and jetties access is limited to the sizes below:–

North Port: length 173 m., draft for entry 7.5 m. with preliminary agreement of the Harbour Master, after a first call at South Port. Departure draft fixed by the Harbour Master.

South Port: length 180 m. if draft less than 7.50 m.
175 m. if draft less than 8.50 m.
160 m. if draft less than 9.00 m.
(On departure only)

Fishing Basin: length 55 m. draft 4.50 m.

Otherwise entry or departure will depend on the pilots advice. Normally entry only occurs at the following times depending on the season.

Maximum daylight 0500 hrs. – 1845 hrs.
Minimum daylight 0600 hrs. – 1800 hrs.

RADIO: Saint Denis Radio. Harbour Master's Office equipped with VHF. Call on Channel 16.

TUGS: Only used to assist vessel manoeuvring in the port. Tugs join vessel in outer harbour. Ship's lines always used.

BERTHING: Berth assigned by Harbour Master, basis vessel's length and draft. Tankers berth in the outer harbour at dolphin berth. No slop facilities.

Fore Port: (Channel: 70 m. usable width. Turning circle 300 m. Dredged to 10 m. Berth H, 175 m. long, dredged to 10 m.).

North Port: Access lock: 30 m. width, 10 m. depth.
Berth 1: 160 m. length, 8.50 m. depth.
Berths 2, 3, 4: total length 366 m., 9.00 m. depth.
Berth 5: 150 m. length, 8 m. depth.
Berth 6: (National Marine Berth) 140 m. length, 6 m. depth.
Berth 7: 210 m. length, 9 m. depth.

South Port: Berths 8, 9: Each 190 m. length, 10 m. depth.
Berth S: 120 m. length, 10 m. depth.

Fishing Basin: 6 berths, 70 m. length, 5 m. depth.

The depths above are dredged depths.

Facilities for handling 22 ton containers.

CRANES: No shore cranes. Floating cranes with 100 tons capacity available.

STEVEDORES: Normal working hours 0700–1700 hrs.

DENSITY: 1025.

FRESH WATER: Available by pipe-line at the quays. Rate 10 t.p.h. Not available at tanker berth.

FUEL: All grades of fuel and marine diesel available at berths Nos. 8 and 9.

MEDICAL: Doctor and hospital facilities available.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Normally performed by ship's crew.

REPAIRS: Only minor repairs can be effected.

REPATRIATION: All facilities available for crew change and repatriation.

AIRPORT: 30 km. away, daily connections to Africa and Europe.

TIME: GMT plus 4 hours. No alterations during the year.

HOLIDAYS: No cargo work on May 1st or November 1st. Can be worked at overtime rates on January 1st, Easter Monday, Whitsun, July 14th, August 15th and December 25th.

TELEPHONES: Police 22.00.17, 22.08.22. Ambulances 18 or 22.03.16 (Private), Fire 18, Harbour Master 22.08.22. Telephones can be placed onboard at all berths.

IDENTIFICATION CARDS: Seaman's Book sufficient.

DELAYS: General cargo rates 500–1,000 tons per day depending on category and conditions.

SHORE LEAVE: Crew are allowed to go ashore.

SHIPMASTER'S REPORT: September 1978.

Documents: 1 Crew personal effects list, 1 Crew list, 1 Bonded stores list. Declaration of Health (Supplied on arrival).

Pilotage: Pilotage compulsory. Pilot boards 1 mile off breakwater, minimum of 24 hours notice required.

Anchorage: At Saint Pauls Bay, 5 cables offshore in depth of 20 fathoms – the water is too deep further offshore.

Restrictions: Vessels can enter and leave at any stage of the tide during daytime. Max. beam for North Port 22 m.

Max. Size: Length 180 m. with draft 7.15 m., length 175 m. with draft 8.5 m. and length 160 m. with draft 9.0 m.

Tugs: 1 tug available and required for berthing and unberthing in the North Port.

Radio: Radio station – Saint Dennis Radio "FFD".

VHF: Pilot and Port Authority Channel 16.

Special Bulk Facilities: Bulk sugar berth – rate 400 t.p.h. No quay cranes – no Ro/Ro facilities. Facilities for handling containers. Storage space for containers under construction.

Fresh Water: Available.

Repairs: Limited facilities.

Services: Provisions, Bunker fuel, diesel available.

AUTHORITY: Capitain du Port.

AGENT: SCAC La Reunion P.O. Box 705, 97474 Saint Denis De la Reunion, Tel. 21.01.32., Telex 0961 37.

NOTES

Please also advise Shipping Guides Ltd.

Romania

CONSTANTZA: 44.12 N. 28.41 E. (See Plan Book)

DOCUMENTS: As soon as vessel is boarded by the border control commission, the Master fills in a form of declaration in 4 copies, which together with Stowage Plan, Cargo Manifests, Sanitary Certificates, is handed to representative of the Agency. Also following documents are to be handed over at Harbour Master's Office:

Derating Certificate.
Certificate of Nationality.
Tonnage Certificate.
Safety Equipment Certificate.
Load Line Certificate.
Safety Radio-telegraph Equipment Certificate.
Ship's Register.
Safety Construction Certificate.

N.B. These documents will not be returned to the vessel until sufficent funds, in U.S. dollars, have been deposited by Owners to cover all vessel's disbursements.

Crew Lists and Passenger Lists must be typed in several copies (up to 7).

Purser's Report: 1976.

The Authorities require all the ship's certificates, discharge books, health declaration, and vaccination certificates. At least 10 copies of crew list, personal declaration and 2 copies of stores list containing all items of foodstuff, bonded goods and canteen.

PILOTAGE: Upon arrival in roads, a cable must be sent through radio coast station to Agent, stating hour of arrival and asking for Pilot. If entrance is not possible immediately due congestion Agent will call back the vessel advising when Pilot may board near the port entrance in order to berth vessel.

A pilot is required for shifting in port, even for warping along the quay. Pilot-boat has black hull with "Pilot" in white on sides, and white upperworks. Pilots operate 24 hours a day on VHF Channel 14 only.

MINEFIELDS: Danger Area No. 3B (Constantza South). The area enclosed by the coast and by lines joining the following positions:

(a)	44° 09.81′ N.	28° 38.25′ E.	*(b)*	44° 08.99′ N.	28° 39.96′ E.
(c)	44° 08.50′ N.	28° 39.96′ E.	*(d)*	44° 08.50′ N.	28° 54.01′ E.
(e)	44° 00.17′ N.	28° 54.01′ E.	*(f)*	44° 00.17′ N.	28° 39.88′ E.

Danger Area No. 3A (Constantza North). The area enclosed by the coast and by lines joining the following positions:

(a)	44° 21.79′ N.	28° 41.19′ E.	*(b)*	44° 21.79′ N.	28° 52.69′ E.
(c)	44° 21.14′ N.	28° 54.01′ E.	*(d)*	44° 10.19′ N.	28° 54.01′ E.
(e)	44° 10.19′ N.	28° 42.18′ E.	*(f)*	44° 10.48′ N.	28° 42.16′ E.
(g)	44° 10.99′ N.	28° 40.76′ E.	*(h)*	44° 09.77′ N.	28° 39.55′ E.

ANCHORAGE: Anchorage areas in Constantza roads are just near the new port works in an area up to 44 ft. depth. Length and breadth have no special restrictions. Actual official permitted draft for tankers 30.6 ft. will be soon improved in new tanker berths. Constantza anchorage – East approach Nr. 2. Approach is between limits of Danger Areas Nos. 3B and 3A. Width 1.7 miles, length 15.3 miles, direction 270°–090°. Centre line joins following positions.

C1: 44° 09.35′ N. 29° 02.20′ E. At 17.5 miles on bearing 091° 12′ from Constantza main lighthouse (nr. 1.5).

C2: 44° 09.35′ N. 28° 41.00′ E. At 2.25 miles on bearing 099° 12′ from Constantza main lighthouse (nr. 1.5).

On this approach non-degaussed vessels with a max. draft 12 m. may navigate.

MAX. SIZE: Vessels up to a max. draft 35 to 36 ft. may berth in Constantza. See "Tankers".

TUGS: Tugs normally join vessel near port entrance assisting them until berthing.

RADIO: Constantza coast radio station, call sign YQ1, frequency 462 kc/s. Operation – daily starting at 0650, 1250 and 1850 hrs. GMT.

TANKERS: 5 oil wharfs under construction capable of berthing tankers up to 80,000 d.w.t.

MEDICAL: Crew members are offered medical assistance on all working days between the hours of 0900–1200 and 1300–1700 hrs.

GANGWAY/DECK WATCHMEN: Watchmen recommended for special general cargoes. Cost will be arranged through Agent.

CUSTOMS ALLOWANCE: Small quantity permitted for each crew member out of bond but may be renewed if vessel stays longer in port.

REPAIRS: Largest dry dock in Constantza has 15,000 tons lifting capacity, second dock up to 8,000 tons.

TIME: Local time is GMT plus 2 hours.

HOLIDAYS: Official holidays in Romania: New Year's Days (1st and 2nd January); Easter Orthodox Monday (April); Labourer's Days (1st and 2nd May); Liberation Days (23rd and 24th August); Anniversary of Socialist Revolution (7th and 8th November); Christmas (25th and 26th December); Proclamation of the Republic (30th December).

STEVEDORES: Working hours 0800–1700 and 2000–0500 hrs. Saturday afternoons, afternoon of days before holidays, Monday mornings and days after holidays until 0800 hrs. usually exempted in C/P although work may be effected. Loading and discharging are generally effected by shippers and receivers, respectively at their own expense and they may work also on holidays, Sundays and Saturday afternoons, no overtime expenses being charged to the vessels for shore labourers but without payment of overtime to vessel's crew and without counting the time.

SHORE LEAVE: On completion of border inspection, crew can go ashore taking their Seaman's Books (or Passports) and the permits they receive from the soldier at the gangway. The permits must be returned to soldier upon coming back on board. In the event that crew members desire to visit another place outside Constantza they must inform Agent.

GENERAL: From the time a vessel enters the territorial waters of Romania until she leaves the respective zone, i.e. 12 miles, it is compulsory to fly the Romanian flag. Ships that call at Constantza for the first time and have not got the Romanian flag on board must have it ordered through the Agent immediately upon berthing.

SHIPMASTER'S REPORT: Rate of exchange is "Tourist Rate" which is approximately 3 times official rate. It is illegal to take Romanian money into or out of the country, any money which has not been spent must be returned to Agent in front of Customs when clearance is being given.

Any stages, gantlines or painting scows must be taken inboard at night. First opening and closing of hatches are for ship's account. Motor-boats operate a "taxi" service in harbour at a cost of 8 Lei per person per trip.

Bunkering barge *nr Monteoru* delivers oil at approximately 60 metric t.p.h. Control will only issue clearance after all cargo work, bunkering, etc., is completed.

At Mineral Berth iron ore is discharged by 2 large Gantry Cranes operating grabs, each working at approximately 200 t.p.h. Rate of discharge is frequently disrupted by shunting of railway trucks – 2 tracks serve five berths.

GENERAL: Following is an extract from "Notice to Sailors" issued by authorities at Constantza:

1. Crew members are required to observe international rules covering work protection, port sanitation and customs regulations, and in addition, Romanian law, both within the port and outside that area.

2. In order to avoid accidents concerned with port equipment, cranes, trucks, tractors and trains etc., crew members walking inside the port area are permitted to walk only on the main streets and between the berths where their vessels are moored, and/or to entrance/exit No. 1, the Navlomar Agency, the Harbour Station, the Navlomar tax-free shop or the Seamen's clinic.

3. Crew members are required to enter or leave the port area at gate No. 1.

4. Crew members are required to be back aboard their vessels by 0400 hrs.

5. Crew members wishing to visit other zones in the country are required to obtain a visa from the ship's Agent.

6. Transportation with the port by motor-boat which leaves the Harbour Station every fifteen minutes and calls at all berths in the port, is available subject to crew members being in possession of the proscribed ticket issued by ship's Agent and duly signed and stamped by the ship's Master.

7. The tax-free shop is located next to the Harbour Station. All purchases must be retained aboard under customs control until the vessel has sailed.

8. It is forbidden, either to bring-in or to take-out Romanian currency. Such currency is obtainable from Navlomar Agency at Master's request and for Owner's account. All Romanian currency remaining in crew members possession must be returned to the Master before sailing, and the Master is required to return the currency to Navlomar.

9. The port Polyclinic is available for medical attention to crew members at the following times: Monday, Wednesday and Friday, between 1300 and 1600 hrs. Tuesday, Thursday and Saturday, between 0800 and 1300 hrs. In cases of emergency, assistance is obtainable by telephoning 16528.

10. Crewmail and messages are delivered daily by ship's Agents, and outgoing crewmail is collected for despatch at the same time.

AGENT: Navlomar Shipping Agencies, Telex 014-259. Cables "Navlomar Constantza".

SULINA (including Galatz and Braila): 45.09 N. 29.39 E.

DOCUMENTS: Within maximum 1 hour from fulfilment of arrival formalities the Master or Chief Mate reports at the Harbour Master's Office where he hands the following documents:

Certificate of Nationality.
Tonnage Certificate.
Safety Equipment Certificate.
Load Line Certificate.
Safety Radio-telegraphy Equipment Certificate.
Safety Construction Certificate.
Cargo Gear Certificate.

The above certificates are to be valid and not to expire before ship's sailing the port, Load Line Certificate and Cargo Gear Certificate not to be older than 12 months, and same remain with the Harbour Master until ship's departure when returned through the representative of the Agency that accompanies the Control Commission on departure.

PILOTAGE: Notice of arrival to Pilot station at Sulina is to be sent in due time through Navlomar Sulina.

Sulina – S.E. approach nr. 5. Width 1.6 miles. Length 7 miles. Direction 146°–326°. Centre line joins the following positions:

S1: 45° 03.01′ N., 29° 53.4′ E. At 11.5 miles on bearing 124° 24′ from Sulina lighthouse (nr. 1.20).

S2: 45° 08.9′ N., 29° 47.9′ E. At 5.75 miles on bearing 095° 42′ from Sulina lighthouse (nr. 1.20).

Thence on the No. 01 Sulina black light and whistle buoy, and afterwards on the line of Sulina Entrance leading lights (301° 12′) into Sulina Channel and so to harbour. On this approach non-degaussed vessels with max. draft 7 m. may navigate.

The port of Galatz is situated on the left side of the Danube 79 miles from the Black Sea.

RESTRICTIONS: Vessels calling at Danube ports are obliged to wait in roadstead of Sulina, at least 1 mile away from the black buoy (a black floating cylinder marked "01" in white, which is lighted at night by green flashing light). All vessels both entering and going out of Sulina channel as well as during navigation in the channel and Danube, are obliged to have on board a Danube Administration Pilot. As a rule, entering and leaving the Sulina channel, as well as navigation in the channel, is prohibited after night-fall.

MAX. SIZE: The draft at Sulina bar is 23 ft. passable. Any other changes of official draft are broadcast daily, at 1150 hrs. on 1935 m. long wave. Galatz: Max. passable draft River Danube is 23 ft. (7.01 m.) for vessels up to 180 m. LOA.

MINEFIELD: Danger Area nr. 7 A (Sulina). The area enclosed by the coast and by lines joining the following positions:

(a)	45° 13.27′ N.	29° 40.42′ E.	*(b)*	45° 11.77′ N.	29° 41.42′ E.
(c)	45° 09.17′ N.	29° 57.22′ E.	*(d)*	45° 07.37′ N.	29° 57.22′ E.
(e)	40° 03.07′ N.	29° 54.82′ E.	*(f)*	45° 03.07′ N.	29° 39.34′ E.

CLEARANCE: On arrival in Sulina harbour vessel has to stop to complete border and sanitary formalities and after vessel has completed same, with Danube Administration Pilot on board, proceed to destination. After the vessel has completed manoeuvring to come alongside berth, she is boarded by the sanitary commission. If the vessel has passed the sanitary inspection she is boarded by border control commission which includes a representative of the Agency, the latter assisting the Master in fulfilling arrival formalities and facilitating meeting of any requirements on ship's part. The Master fills in a form of declaration in 3 copies which together with the Stowage, Plan, Cargo Manifest, etc., are handed to representative of the Agency upon his leaving ship. A supplementary declaration is to be completed by the Master, stating: 1. Who supports disbursements expenses (name, mail address, telegraphic address, number of telex). 2. Who supports the supplies of bunkers, provisions other services, etc. (name, mail address, telegraphic address, number of telex).

RADIO: Constantza – coast radio station. Call signal YQ1, frequency 462 kc/s. Operation daily, starting with 0650, 1250 and 1850 hrs. GMT. Contents of transmission: meteorological and navigation notices. Weather forecasts are broadcast in clear English or codified; radio notices to mariners and navigation warnings are broadcast in Romanian, Russian and English.

BERTHING: After arrival in Galatz roads and port Pilot boarded, the berthing of the vessel is done as ordered by the Port Authorities according to the possibilities of operation (loading/discharging) and to the availability of berths.

MEDICAL: Crew members are offered medical assistance if necessary when the Master requests, and they have to come to the Agency Office between 0800 and 0900 hrs. every day, except Sundays and holidays.

STEVEDORES: Working hours: 0700–1500 and 1500–2300 hrs.

CUSTOMS ALLOWANCE: For releasing cigarettes from Customs seal it is necessary to notify the Agent who, in turn, will arrange with the Customs House. Attention is drawn to the fact that bringing into or taking Romanian currency out of the country is prohibited. According to requirements of crew, the Master gets from Agent any sum of Romanian currency. The respective sum is charged in the disbursements account at official exchange rate +200% premium granted to seamen. Before departure from port the Master is obliged to return to Agent the sums of Romanian currency unspent against receipt. The sums are returned in front of the representative of the Customs during the control for departure.

OPENING/CLOSING HATCHES: Opening and closing of the hatches is to be performed by crew whenever requested due to weather conditions.

CARGO GEAR: Rigging of derricks, the good working condition of the winches and derricks, are permanent obligations of the vessel according to requirements of working gangs. The hatch ways must be opened or closed to their full size. The removable beams or covers shall always be stowed on deck on the side where work is not being carried on, so that they may not hinder working gangs or cause accidents. During operations, the vessel is recommended to close the hatches with rain tents, ship's property, if bad weather. If cargo handling gear gets out of order during operations, the waiting time of workers is charged against vessel and such time lost for breakdown of winches not to count as laytime.

SHORE LEAVE: On completion of border inspection crew can go ashore taking their Seamen's Books (or Passports) and the permits they receive from the soldier at the gangway. The permits must be returned to the soldier upon coming back on board. In the event that Crew members desire to visit another place of Galatz they shall inform the Agent.

GENERAL: From the time a vessel enters the territorial waters of Romania until she leaves the respective zone, i.e. 12 miles, it is compulsory to fly the Romanian flag. Ships that call at Galatz for the first time and have not got the Romanian flag on board must have it ordered through the Agent immediately upon berthing at Sulina Harbour. Throwing garbage overboard or pumping out dirty ballast or bilge water is allowed only beyond the territorial waters of Romania. Non-observance of these rules may result in fines varying between 3,000 and 10,000 lei imposed by the Harbour Master.

AGENT: Navlomar Shipping Agency.

Galatz: 20, 13 Junie. Telex 225. Cables "Navlomar Galatz".

Braila: 2 Imparatul Traian. Telex 10. Cables "Navlomar Braila".

NOTES

Please also advise Shipping Guides Ltd.

St Lawrence Seaway

ST. LAWRENCE SEAWAY (See Plan Book)

DOCUMENTS: For Agent in Montreal, 3 unfreighted copies of Complete Manifest for Seaway Toll purposes covering all cargo to be discharged in the Great Lakes.

The St. Lawrence Seaway Authority requires one Transit Declaration Form. Also for cargo to or from overseas one unfreighted copy of the complete Manifest is required.

In first U.S. port, a "Traveller" is made up by the Customs Inspector with the following documents:

2 complete sets of U.S. Cargo Manifests, plus 6 copies for Agents.
1 set Manifest of Cargo for first U.S. port.
4 Stores Lists.
4 Personal Effects Lists.
4 Firearms and Ammunition Lists.
4 Crew Lists, Form 1–418.
4 Narcotics Lists.
4 Vessel's Itinerary Lists.
Vessel's Registry and copies of Paid Tonnage Tax Certificates.
Health Pratique.
Clearance from previous port.
2 sets Bills of Lading.
3 copies Stowage Plan.

In subsequent U.S. ports the following are required:

5 sets Manifest of Cargo for that port.
The Traveller and Permit to Proceed issued in previous port.
2 Stores Lists.
2 Personal Effects Lists.
2 Firearms and Ammunition Lists.
2 Crew Lists.
2 Narcotics Lists.
2 Sets Bills of Lading.
3 copies Stowage Plan.

Vessels navigating St. Lawrence Seaway are required to complete applications for:

(1) Certificate of financial responsibility.
(2) Certificate of Insurance, form FMC 225,
(3) Oil discharge assurity Bond, form FMC 226,
(4) Guarantee in respect of liability for discharging oil, form FMC 227.

These applications have to be filed with the Secretary of the Federal Maritime Commission before a certificate is issued. The oil pollution liability certificate should be retained aboard the vessel.

ICE ADVISORY SERVICE: Ships inbound from seaward between December 15th and April 15th should advise the Ice Information Officer, Sydney, 36 hours prior to entering Cabot Strait, stating their position, destination, whether loaded or in bulk. This procedure will facilitate the passing of ice information to the ship as necessary. Ice information is also available from radio stations at Halifax, Seven Islands, Wirringate and Grindstone. The Canadian Broadcasting Corporation Maritime Network also broadcasts ice information daily during the winter navigation season. Supplementary ice information may also be obtained from the Canadian Marine Service Icebreakers.

During the ice season, radio broadcasts of ice information are made twice daily from Marine radio stations as follows: Cape Race, Newfoundland; Fox River, Quebec; Mont-Joli, Quebec; Halifax, Nova Scotia.

PILOTAGE: The first Pilot station when entering the St. Lawrence River is at Les Escoumins, 80 miles West of Father Point. This Pilot will take the ship to the Quebec Pilot station 121 miles to the West. Off Quebec a new Pilot boards to take the ship to Trois Rivieres, where there is another change of Pilot for the remaining trip to Montreal.

Pre-clearance: Vessels intending to transit the St. Lawrence Seaway must be pre-cleared by a representative who shall assume responsibility to the authority for payment of all tolls and charges to be incurred.

Application for pre-clearance Form SLS 429 may be obtained from the St. Lawrence Seaway Authority, Cornwall, Ontario, or from the St. Lawrence Seaway Development Corp., Massena, New York.

RESTRICTIONS: The average navigation season in the Montreal–Lake Ontario section of the St. Lawrence River is from April 1st to December 18th.

Locks Nos. 1 to 7: length 262.13 m., width 24.38 m., depth 9.14 m., channel depth 8.23 m.

Welland Canal Locks: No. 1: length 263.65 m., width, 24.38 m. Nos. 2 to 7: length 261.82 m.; width, 24.38 m. No. 8: length, 420.62 m.; width, 24.38 m.; channel depth 8.23 m.

St. Mary's River Locks: MacArthur: length, 243.84 m.; width, 24.38 m. Poe: length, 365.76 m.; width, 33.53 m.; depth, 9.75 m. Davis: length, 411.48 m.; width, 24.38 m. Sadin: length, 411.48 m.; width, 24.38 m. Canadian: length, 274.32 m.; width, 17.98 m. The channel depth (lower end) to the Canadian Lock is 6.10 m., with a normal depth of 5.56 m. over the sill. As Easterly gales raise, and Westerly gales lower the water levels below the Lock temporarily, it is recommended that Masters of larger vessels ascertain the available depth from the canal office prior to locking.

Speed Limits: 8.6 knots upbound, 10.4 knots downbound in the Beauharnois Canal; 7.7 knots Port Weller Harbour and Welland By-Pass Channel; 6.1 knots in all other canals. The speed limits vary from 8.6 knots to 15.5 knots in most remaining sections of the St. Lawrence River; Lower Detroit River 10.4 knots; St. Clair River 7.7 knots to 10.4 knots, St. Mary's River 8.6 knots to 13.0 knots. Speed limits are detailed in a seaway notice issued early in the year.

MAX. SIZE: Length 222.5 m., beam 23.16 m. (including permanent fenders), draft 7.92 m. Masts must not exceed 35.66 m. above water level.

HEALTH: All ocean-going vessels must obtain a free pratique before entering the Seaway. Vessels entering the Seaway direct may receive quarantine inspection and clearance from the Canadian authorities at Montreal while at anchor awaiting entrance to the Seaway.

RADIO: *Notice of Arrival.* Master must give at least 24 hours notice to commander, 9th Coast Guard District, Cleveland, Ohio, of the vessel's ETA at Snell Lock. Also at least 24 hours notice of ETA at first U.S. discharge port is required.

Welland Canal: Whenever an approaching vessel arrives at calling-in-point (CIP) 15 or 16 it must call Seaway Welland on Channel 14, 156.7 mHz. It shall inform the Traffic Control Centre of its destination. The Traffic Controller will obtain the particulars required before transit is permitted and will give the necessary dispatch information to the vessel.

Great Lakes: It is recommended that vessels within a radius of 30 nautical miles of a shore station use their FM transmitting and receiving equipment to ensure better connections. This pertains especially to vessels at anchor or in the proximity of a port or berth.

Radio Stations: Buffalo, New York, marine operator. Port Burwell, Ontario, marine operator. Geneva, Ohio, marine operator. Loraine, Ohio, marine operator. Rogers City, Michigan, marine operator.

IDENTIFICATION CARDS: In the first U.S. port, the immigration officer requires an alphabetical crew list made up on Form 1–418 and visaed by the American consul in the last overseas port. This crew list should contain the name of every crew member on board. Also needed are 3 copies of this crew list on the same form. The Immigration Officer will require all seamen's books and passports, to issue the completed crew landing permits made out on Form 1–95A. The Master will be given a crew list receipt which will indicate the names of crew members detained on board, if any. In case a crew member is detained on board, he cannot go ashore, and at irregular times an officer of the Immigration Service will check if the crew member is on board. A fine of $1,000.00 will be imposed on the vessel for each detained Crew member who is not on board.

TUGS: Whistle signals differ from those in international usage and are as follows:

1. Ship to Tug: 1 Long and 1 short (—.) = ship ready to proceed, O.K. or all right. 1 Long and 2 Short (—..) = let go the bow tow-line. 1 Long and 3 Short (—...) = let go the stern tow-line.
2. Both Ship to Tug and Tug to Ship: 1 Short(.) = work propeller ahead when stopped, *or,* stop propeller when working, either ahead or astern. 2 Short (..) = work propeller astern. 3 Short (...) = slow down or check. 4 Short (....) = work propeller strong in the same direction it is working at the time the signal is blown. 5 or more Short blasts (.....) = the standard danger signal.

SEAWAY EQUIPMENT: *Radio-telephone Equipment:* All vessels, other than pleasure craft of less than 19.81 m. in overall length, must be equipped with VHF radio telephone equipment, in addition to the FM equipment otherwise required. The radio transmitters must have sufficient power output to enable the vessels to communicate with Authority Stations from a distance of 26 nautical miles and must be fitted to operate from the wheelhouse and to communicate on 156.55, 156.6, 156.65, 156.7 and 156.8 mc/s.

Stern Anchors: Every vessel of more than 106.68 m., the keel of which was laid after January 1, 1975 is required to be equipped with a stern anchor.

Propeller Direction in Alarms: Vessels in excess of 79.25 m. in overall length shall be equipped with propeller direction and shaft r.p.m. indicators or visible and audible wrong-way propeller direction alarms located in the wheelhouse and in the engine-room.

Sewage and Galley Waste Disposal Systems: Sewage retention tanks and galley waste grease traps are required for vessels not otherwise equipped with containers for ordures. At Montreal, or at Port Colborne, vessels without retention tanks intending to call at Chicago must put on board chemical toilets which are offered for rental by 2 chemical companies. 2 to 10 chemical toilets are required for each ship at a rental charge of $75.00 each per trip into the Lakes.

Oily Water separators: Vessels which cannot contain waste oil products are required to be equipped with oily water separators or other such equipment for the extraction of oil products from waste water before discharge.

Rudder Angle Indicators: Vessels in excess of 79.25 m. in overall length shall be equipped with rudder angle indicators located in the wheelhouse.

Gyro Compass: It is recommended that vessels be equipped with a gyro compass.

Radar Equipment: It is recommended that vessels be equipped with radar.

Vessels not fitted for the Seaway as prescribed above, will incur expenses for the rental, installation and removal of compulsory fittings.

REGULATIONS: For additional information on regulations and procedures, Masters and Owners are urged to refer to the Seaway Handbook and Seaway Notices.

AUTHORITY: The St. Lawrence Seaway Authority.

St. Pierre and Miquelon

ST. PIERRE: 46.47 N. 56.10 W. (See Plan Book)

DOCUMENTS: Formalities completed on arrival. Advise Port Service beforehand of vessels ETA, length, tonnage and draft.
Declaration of Health.
Derat Certificate.
2 Crew Lists.
2 Passenger Lists.
2 Cargo Manifests of any cargo to be discharged.
2 Crew Declarations (tobacco, liquor, souvenirs).
Certificate of Registry.

PILOTAGE: Contact Pilot 1 hour before arrival calling TXU by radio telephone on 2182 kc/s. or VHF Channel 16. Permanent watch kept. Pilot boats equipped with VHF Channel 12, radar, and radio-telephone. Pilot launch available at entrance to N.E. channel in position 46° 48′ N. 56° 08′ W. in the vicinity of the Land Fall Buoy.

Pilot launch named *Radar*, length 45 ft. The hull is black and superstructure white with "Pilote" painted on each side. Pilot launch carries the International Signals for pilot launch day and night.

When the weather is bad contact Pilot on Channel 12 for instructions.

Pilot is compulsory for vessel of 150 g.r.t. and over.

ANCHORAGE: In the roads, depth 13 m., not secure in strong East winds.

Shipmaster's Report: The anchorage in the roads where fish is loaded ex-trawlers is absolutely not secure, even with moderate winds from any direction, and engines should be on stand-by continuously. Several ships have gone on the rocks in a matter of minutes.

MAX. SIZE: Max. draft 8 m. New Port: max. length 110 m. Old Port: max. length 70 m. Channel depth 5 m. below chart datum.

HEALTH: If suspected disease on board contact St. Pierre Health Service, tel. 279.

Masters of vessels arriving at St. Pierre may obtain free pratique via TXU. Message to be sent to Harbour Master Saint Pierre 12 hours before arrival.

In the message the Master has to specify name of vessel, total number of crew member,. where ship coming from, and if everybody on board healthy; in these conditions flag "Q" is not necessary on arrival, but if any suspected disease or fever on board, advise Health Authority as well as Agent, and stand by instructions for berthing. Flag "Q" has to be flown on arrival in the roads.

RADIO: St. Pierre Radio, call sign TXU, receiving on 2182 kc/s. transmitting on 2410 kc/s.

Masters of vessels arriving are requested to send their ETA to Harbour Master Saint Pierre 12 hours before arrival and corrected by a further message if necessary. The ETA should be GMT. Also advise maximum draft and length.

Saint Pierre Radio is equipped with VHF Channels 16, 24 and 26 and maintains permanent watch on Channel 16.

TUGS: No tugs available but the pilot launch (230 h.p.) will assist on Master's request.

BERTHING: Mole du Commerce; length 170 m., depth alongside 8.50 m.

Quai de Peche: length 135 m., depth alongside 6 to 7 m.

Mole Frigorifique: 3 berths, No. 1; 120 m. length, 7 m. depth. No. 2; 85 m. length, 6 m. depth. No. 3; 120 m. length, 5.5 m. depth.

Old Port: Quai de la Douane: length 123 m., depth 6 m.

Quai de l'Alysse: length 50 m., depth, 6 m.

Pilot will inform Master of berthing prospects and any special requirements.

STEVEDORES: ETA notices are to be sent to Agent 24 hours prior arrival. Stevedore in Saint Pierre is Paturel Freres (tel. 604 and 295). Cable Address "Reltupa Saint Pierre". Telex Reltupa 20 QN.

Approximately 100 men are available for working on board vessels when loading/discharging or transhipping in the port. Crew are allowed to work only when no gangs are available.

One normal shift 0730 to 1600 hrs. every week-day, Saturday 0730 to 1200 hrs.:

Day overtime, Saturday 1200 to 1600hrs.

Night overtime, every day after 1600 until 2400 hrs.

Extra overtime, night after 2400 until 0700 hrs., and Sundays and holidays.

Work done with ship's derricks.

It is requested that a net be put under the gangway before starting work.

Pallets, slings, fork-lift and crane (5 tons) available at a charge.

TANKERS: 1 berth alongside dolphins in depth of 8.50 m.

MEDICAL: All facilities available.

FRESH WATER: Available at berths. Supplied by hoses, rate 25 cu.m./hr.

FUEL: Only diesel oil SG 825/840 at 15° C available at all berths.

OPENING/CLOSING HATCHES: Normally carried out by crew.

IDENTIFICATION CARDS: Each man to carry passport or seamen's book.

CONSULS: Local representatives for Canada, Netherlands, Norway, Portugal and Spain.

REPAIRS: Small repairs can be effected. Floating dock, capacity 750 tons, for vessels up to 13 ft. 6in. draft.

REPATRIATION: Can be arranged.

TIME: GMT minus 3 hours all the year round.

AMBULANCE: Telephone: 279.

AIRPORTS: Connections from St. Pierre to Sydney (Nova Scotia) International Airport.

TELEPHONES: Not possible to place telephones on board. It is possible to contact the shore on Channel 16 via Saint Pierre Radio.

SERVICES: Compass adjusting, radar repairs, radio, Decca, Loran and gyro-compass repairs and maintenance possible.

AUTHORITY: Officier de Port.

NOTES

Please also advise Shipping Guides Ltd.

Saudi Arabia

TRAVEL FROM BAHRAIN: Travel is permitted from Bahrain to Saudi Arabia, *provided* travellers *(a)* hold a valid International Vaccination Certificate showing that the holder was immunised at least 5 days before travelling to Saudi Arabia, but not more than 3 months previously; *(b)* that any traveller proceeding to Saudi Arabia from Bahrain should have taken the prescribed doses of Tetracycline over the 48-hour period immediately before travelling. The fact that the passenger has taken the Tetracycline should be certified by the Bahrain Health Department.

DAMMAM: 26.30 N. 50.12 E. (See Plan Book)

LOCATION: Situated on the East coast of Saudi Arabia, in the Arabian Gulf.

FLAG: In addition to the quarantine signals which are to be shown until pratique is granted, the Saudi Arabian Flag must be flown from vessel's foremast while in port of Dammam.

DOCUMENTS: In order to cope with Port, Customs and Agent's requirements, following documents should be submitted to the Port Management at least 48 hours prior to arrival of vessel at Dammam port:

12 copies of Cargo Manifest for each port of loading, all typed, stamped and signed.
2 copies of Freight Manifest.
3 copies of Hatch List.
3 copies of Stowage Plan.
1 copy of each non-negotiable Bill of Lading.
List of Dangerous Cargo on board, if any.

The particulars of the certificates required by the SOLAS regulations are entered on the Ports Form on the arrival of the vessel at the anchorage and the certificates are sighted after berthing. Also see "Health".

PILOTAGE: Pilotage at Dammam port is compulsory. Manoeuvring of vessels in the vicinity of pier or in anchorage will always be performed under supervision of a Dammam port Pilot.

The Dammam port Pilot will board vessels off No. 1 Buoy which is located in position 26° 33′ 53″ N., 50° 11′ 36″ E. and will then pilot vessels to anchorage or berth at pier.

ANCHORAGE: The approach anchorage area is situated South of parallel 26° 34′ 00″ N., and may be demarcated on the East by the 6 fathoms contour starting in proximity of Buoy No. 1 coming up to Buoy No. 3, and thereafter remaining West of line drawn from light Buoy No. 3 to Beacon No. 6. On the West, the approach anchorage area extends within the 6 fathom contour, starting from Beacon No. 4 and Beacon No. 6.

The vessels anchored in approach anchorage are required to keep fairway clear for access to and from port.

WEATHER: The peninsula of Saudi Arabia is almost of an equatorial climate. In Winter the temperature is rather low but in Summertime it rises over 50 degrees Centigrade. Rain is generally scarce. During major part of year, but especially during Summer, the relative humidity is high. From July to September it frequently exceeds 85%.

Winds in this area are not predictable for more than a few hours. They vary in strength and direction, although prevailing winds are from N.W.

TIDE: The Diurnal tide rise at port of Dammam is approximately 8 ft. at springs, and 5 ft. at neaps. Currents generally drift with tide, and run in or out of the port in counter clockwise rotation. Depending on weather conditions and other contributing factors, these currents are slow moving at all times, speed reaching maximum of 3 knots.

MAX SIZE: See "Berthing".

HEALTH: In accordance with international practice, quarantine signals must be displayed by all vessels approaching Dammam port. These signals shall be displayed continuously until pratique granted. Such signals are the following: Sunrise to sunset – Quarantine Flag; Sunset to sunrise – Signal Lights – red over white.

The Quarantine Officer will board the vessel either at anchorage or at pier. Documents required for immediate inspection are the following:

International Maritime Health Certificate (from the last port).
Valid Deratisation or Deratisation Exemption Certificate.
Crew List (3 copies).
Passenger List, if any.
Valid Smallpox Vaccination Certificates (of a date not exceeding 3 years) for all crew members and passengers.
Valid Cholera Certificates (of a date not exceeding 3 months) for all crew members and passengers.
Valid Yellow Fever Certificates for all crew members and passengers.
Certificates of Inoculation against any communicable diseases prevailing at the ports of departure.
Ship's Log Books.

RADIO: (Also see "Agents"). Vessels bound to Dammam are required to notify their Agents 72 hours steaming-time prior to arrival, giving ETA in GMT, total weight tons of cargo for discharge at Dammam, number of workable hatches, Max. arrival draft and overall length of the ship. ETA notice should then be confirmed 48 hours and again 24 hours before arrival.

Vessels' messages to Agents can be given by contacting via wireless Aramco Radio Station "HZY" on 500 kc/s, which station provides free of charge service.

Shipmaster's Report (1978): "Agents request that the following information be included in the 24 hour ETA radio message so they can prepare entry papers before the vessel's arrival:

1. Master's Name.
2. Port of Registry.
3. Nationality of Ship.
4. Gross and Nett Tonnages.
5. Length Overall.
6. Total Crew.
7. Last Port of Call.
8. Next Port of Call.
9. Tonnage of cargo to be discharged Dammam.
10. Number of 20 ft. containers to discharge.
11. Number of 40 ft. containers to discharge.

VHF: VHF system has been installed in the Port Control Tower. Its international calling and answering frequency is on Channel 16. Working frequencies are Channels 19, 6 and 13. Masters of vessels on approaching Dammam are required to obtain permission from the Port Control prior to entering the Port Limits.

The limits of Dammam Port begins from Buoy No. 1 extending to the whole of inner harbour.

The Masters of vessels are required to give the following information to the Port Control before dropping the anchor.

(a) Name of the Vessel
(b) Type and visual markings
(c) Draft and Length
(d) Nationality of the Vessel
(e) Agent in Dammam
(f) Details of Cargo

TUGS: In all there are 10 high powered Tug Boats available in the port. Two of them are 1450 h.p. and two 1350 h.p. The remaining are between 800 to 950 h.p. They are available to assist vessels in mooring or unmooring. Whenever such assistance is provided, Master and crew of tug shall, in the performance of such services as they render to the vessel, become and be deemed to be the Agents and servants of the Owners and/or charterers of the vessel assisted.

BERTHING: The Port has 22 working berths. Their lengths and depths are as follows:

	Length m.	*Depth m.*
Berths 1, 2 and 3	240	14
Berths 4, 5, 11, 12 and 13	180	12
Berths 6, 7 and 8	150	9
Berth 9	178	9
Berth 10	215	11
Berths 14 to 20	180	12
Berths 21 to 22	240	14

Other Port Facilities: Tugs – 10, barges – 36, from 600 tons to 150 tons capacity, forklifts – 349, lifting capacity 25 tons to 2 tons, mobile cranes – 96, lifting capacity 155 to 15 tons. Trailers – 96, 25 tons each. Shore cranes on Berths 6 to 9 – 12 having the lifting capacity of 3 tons each and 3, lifting capacity of 6 tons each.

For the present the remaining 18 berths have no shore cranes, however 48 new electric cranes are under the process of installation. 24 will have 15 tons lifting capacity and the remaining 24 will have 6 tons lifting capacity.

A floating crane of 200 tons, lifting capacity has been recently acquired by the port.

Priority: It is the policy of the Port to berth vessels at available berths in order of each vessel's arrival and registration at Dammam Port on the basis of "First come first served".

However, at the sole discretion of the Port Authority, deviation from this rule can be made in order to place a particular vessel in the berth best suited to the kind of cargo to be discharged from that vessel. The criteria for making decisions to berth vessels out of turn will be:

1. The vessel is carrying cargo such as livestock or fresh fruits and vegetables (not frozen) which would be damaged or impaired by a berthing delay.
2. To best accommodate vessels in those berths which result in the most efficient utilisation of port facilities to the end that total port discharge rate will be maintained at the highest practical level.
3. Car Carriers:– Provided the Agents have obtained clearance from the Customs. One car carrier at a time will be given priority berthing.
4. Ro-Ro Vessels:– Will be berthed within 24 hours of arrival subject to the berth not being used by another Ro-Ro vessel (1 Ro-Ro vessel at a time will be given priority berthing).

Registration. Incoming vessels are assigned berth on a "first come, first served" basis. Every possible effort is made to berth vessels immediately upon arrival. If no berth available, vessels will be listed "in turn" in accordance with time of arrival at anchorage, pratique granted and presentation of cargo documents to the Port Authorities.

In the event of long delay in berthing due to port congestion or otherwise, vessels once "in turn", may be allowed to register and proceed for any other Gulf port for any intended purpose, and return thereafter to Dammam still keeping their position "in turn". In order, however, that a registered vessel may be still considered in turn, is necessary that she return to Dammam within the time limit intimated to the Master at time the ship was cleared out. Failure to return to Dammam within such time limit, will automatically result in loss of ship's turn and being listed at the bottom of waiting list.

Special Berths: Berth No. 14 is earmarked for handling Ro-Ro ships and has special arrangements for stern docking ships. The ramp limitations for stern docking ships is 9.75 m. Berth No. 22 is earmarked for handling container ships. Two travelling gantry cranes of 40 tons lifting capacity have been installed on it for handling containers.

Covered Storage Area: At present there are 14 covered warehouses at the main pier and East port. Area of 6, 7, 8 and 9 warehouses is 4,800 sq. m. each, and area of 4, 5, 12, 13, 14, 15, 16, 18, 19 and 20 warehouses is 5,600 sq. m. each. In addition to these there are 14 storage sheds in the old customs area, their total floor area is 22,031 sq. m.

Open Storage Areas:

2 and 3 zones	85,000 sq. m.
4 and 5 zones	40,000 sq. m.
6, 7, 8, 9 and 12 zones	70,000 sq. m.
Customs, tie yard	778,350 sq. m.

There is no refrigerated store in the port.

DISCHARGE RATES:

Commodity	*D.W.T./Gross/hr*
(a) Bags Cements	20.41
(b) Other Bagged Cargo	9.92
(c) General	11.17
(d) Steel Works	15.38
(e) Bundles of Steel Bars	16.00
(f) Pre-Slung Units	22.41
(g) Pre-Pallitised Units	15.00

STEVEDORES: Stevedoring operations at Dammam are performed by licenced Stevedoring Companies. Charges are levied on weight/measurement basis, in accordance with current tariff.

MEDICAL: Masters may obtain medical attention for ship's personnel from port doctor who may in case of serious illness or injury recommend treatment to local hospitals. The port doctor ordinarily will treat minor illness or injuries on board ship.

Masters of vessels at sea may use services of Aramco Radio Station "HZY" without charge to obtain medical advice at any time.

WATER: Well water is obtainable at certain piers.

Both well water and distilled water in limited quantities, may be also obtainable in Ras Tanura but only in conjunction with and during bunkering operations. The maximum quantity of distilled water obtainable is 15 tons per vessel.

Fresh water also available from private barge.

FUEL: Vessels requiring bunkers have to call at nearby port of Ras Tanura where bunkers facilities are operated by Aramco. No bunkers supplied however unless a nomination is made available at Ras Tanura through Aramco New York. To obtain such nomination, Owners/Charterers/Operators are required to handle the necessary arrangements in advance of time directly with Aramco New York or one of its off-takers.

Fuel oil and marine diesel available from private barges.

CUSTOMS: All materials to be either exported from or imported into Saudi Arabia are subject to examination by Customs Authorities. The importation of the following articles is completely banned.

(a) Alcoholic beverages, including beer and wines.
(b) Narcotics.

Trafficking of the above items between ship and shore is strictly prohibited, regardless of whether they are alongside the piers or at anchor.

The following articles can be imported after obtaining permission from the authorities concerned.

(1) Explosives
(2) Fire Arms
(3) Antiques
(4) Religious material not pertaining to the Muslim faith.

CONSULS: Except for the U.S. Consulate-General residing in Dhahran, no other foreign consulates are available.

DEVELOPMENTS:

Plans and Projects: Under phase 4 programme 16 more berths will be constructed (22 – 38) at West port, 9 berths will be 180 m. long, 12 m. deep and 7 berths will be 240 m. long and 14 m. deep.

3 berths (23, 24 and 25) have been designated for handling container vessels. 2 berths (35 and 36) will have stern ramp facilities and designated for Ro-Ro vessels.

Under phase 4 programme is also included construction of 6 covered warehouses, floor area of each will be 41×40 m. and 6 open side warehouses with similar floor area will be constructed.

Proposed Container Terminal: The container facilities planned to be provided on berth No. 23 and 25 will have 4 wharf mounted cranes of 40 tons capacity capable of lifting containers up to 40 ft. in length and their travel will extend up to full length of berths 23 to 25. The terminal area varies in length from 380 m. to 450 m. and will be about 30 acres.

Berth No. 23 is to be provided with retaining quay wall to handle Ro-Ro vessels with stern ramps. Berth 26 will have sufficient depth and is suitably located in relation to berths 23 – 25, to be utilised as container berth if required.

Shore cranes are being installed on berths Nos. 23 – 26 and will commence operation by January 1979.

REPAIRS: Relatively limited repair service is available from local business concerns and replacement parts are practically unavailable.

Deep-sea divers, operating from modern and well-equipped diving boats, are available at Dammam.

A Lloyds representative is available in Dammam.

AIRPORT: Very good airlines facilities available. Daily departures for any part of the world.

TIME: GMT plus 3 hours all year round.

POLICE/AMBULANCE/FIRE: Emergency Numbers: Ambulance (Port Hospital) – 3151. Port Fire Station – 2111. Police – 97.

SHORE LEAVE: Ship's personnel and passengers are not permitted ashore until permission is granted by immigration and police authorities. The necessary arrangements can be made by ship's Agent on Master's request. While in port, the vessel's personnel is under jurisdiction of the Law of Saudi Arabia.

AUTHORITY: Port Director-General, Dammam Port Management.

AGENT: Gulf Agency Co. Saudi Arabia, POB 86, Airport Post Office, Dhahran, Saudi Arabia, Cables "Confidence Bahrain" stating for Dammam or "Confidence Dammam". Telex: 601069 ("GAC SJ"). Telephone: Normal working hours 22238 and 23426. After office hours 23526 and 23822.

Vessels equipped with VHF, can communicate, when within range, with Agent on stand-by Channel 16 by calling "Confidence Dammam". Voice contacts may be also established via VHF, on the same channel as above, with Ras Tanura office, by calling "Confidence Ras Tanura". Once contact is established on Channel 16, communication will continue by switching on available working Channels as directed.

JEDDAH: 21.28 N. 39.11 E.

LOCATION: The port stands to S.W. of the city, on an island called Jazirat al Mafsaka approximately 600 acres in area. The island is connected with mainland by a causeway.

The harbour is sheltered by several long lines of coral reefs and islands. The access is through 2 narrow channels.

PORT LIMITS: The limits encompass all waters, islands, channels, passages, piers, wharves, jetties, landing-places, sheds, warehouses, workshops, basins, slipways and bridges, etc., contained within the parallels extending from shore seaward to 39° 06′ East Long. and between 21° 27′ and 21° 31′ North Lat. including Qaham and the approach beacons, Mismari and Shib el Kabir.

CLIMATE: Tropical desert, hot climate. Humidity very high during Summer months, but Winter is mild and pleasant. Rainfall is negligible and does not exceed more than 3 to 4 in. per annum.

General direction of wind is mostly N.W., mild in intensity. Winds of gale force occur very rarely. The effect of high winds when they do occur in the harbour is not felt due to barrier reefs breaking force of waves. Waves inside harbour not generally above 1 to 2 m., although waves up to 6 m. may sometimes occur beyond outer reef.

Tides of Indian Ocean do not affect Red Sea due to construction of the Bab-el-Mandab. There is, however, a local semi-diurnal tidal oscillatory motion of the sea along its length, giving a high tide at one end and at the same time a low tide at the other. Jeddah Port is hardly affected by these tides and there are almost no currents produced by these movements.

The variation between Summer and Winter water levels is approximately 50/60 cm. only.

Visibility in the port area is generally good, occasionally obstruction to vision occurs due to dust, but such occurrences are seldom of long duration.

DOCUMENTS:

2 Crew Lists.
2 Passenger Lists.
Last Port Clearance.
Vaccination Certificates.
Stores List.

Prior to the vessel's arrival the following documents are required for translation and submission to the various authorities:

7 copies Cargo Manifest.
1 copy Freight Manifest.
2 copies Stowage Plan.
2 copies Hatch List.
1 copy each non-negotiable Bill of Lading.
7 Lists of Dangerous Cargo, whether for discharge or in transit.

Cargo Documents:

1. All vessels calling at Jeddah Port are, from 1st March, 1977, required to produce 5 copies of Manifest in English and 10 copies in Arabic, together with 2 copies of a complete cargo Stowage plan and 2 copies of Hazardous Goods List to the Customs Authority Jeddah Port. These documents shall be presented as early as possible as no permission to discharge will be granted until the completeness and accuracy of the documents have been checked.

2. All cargo for Jeddah discharge shall be manifested in the name of the vessel actually carrying the cargo to Jeddah. Where transhipment has taken place the name and port of loading of the original carrier shall be incorporated in the Manifest and the relevant Bill of Lading.

3. All Manifests lodged in the port of Jeddah shall be identical copies of the same Master Manifest. Should supplementary Manifests or corrected Manifests need to be lodged the same number of copies in both languages as the original Manifest shall be produced.

4. In respect of barge carrying vessels the Manifests, Stowage Plans and Hazardous Cargo Lists shall be accompanied by a list stating the registered number of each barge to be off-loaded. This shall be produced prior to the discharge of barges from mother ship.

5. All parties are asked for their co-operation in respect of the depositing of all the above mentioned documents in order that the congestion free situation in Jeddah Port may be maintained.

Vessels are requested to provide the following information together with cargo Manifests.

1. Detailed statements covering alcoholic drinks shipped onboard for other destinations also their stowage particulars onboard.

2. In case of no alcoholic drinks shipped onboard for other destinations owners requested also to telex Agents this effect.

This information required 48 hours prior to vessels arrival.

PILOTAGE: The Pilot station is off Kaham Beacon (Lat. 21° 27′ 02″ N., Long. 39° 06′ 32″ E.). Pilotage is compulsory and available 24 hours a day. Pilots do not usually keep station unless expecting a vessel.

ANCHORAGE: If vessel arrives Pilot station too late for entry, anchorage may be made 0.5 mile North or South of the Kaham Beacon.

Arriving vessels will remain at Outer Anchorage until turn for berthing, or proceeding into Inner Anchorage for discharge into lighters.

RESTRICTIONS: No navigational aids marking approaches to port, and therefore there is no night navigation. A lighthouse and lighted marker buoys are scheduled for positioning in the development of the new port.

Only Saudi nationals are allowed to board vessel.

HEALTH: Doctor boards vessel before arrival at berth and grants free pratique.

(a) Cholera: All arrivals from infected or endemic areas are required to possess a certificate showing 2 injections made not less than 7 days and not more than 30 days before arrival. For re-vaccination carried out within 6 months of a recorded vaccination or re-vaccination, a single injection renders the certificate valid for a further 6 months.

In addition, arrivals must submit a certificate dated not more than 7 days before their departure recording the negative results of stool culture. This certificate must be delivered by a licensed laboratory and attested by the Health Authority.

(b) Smallpox: All arrivals are required to submit a valid vaccination certificate in accordance with International Sanitary Regulations.

(c) Yellow Fever: All arrivals from infected or endemic areas are required to submit a valid vaccination certificate in accordance with International Sanitary Regulations.

(d) Mecca: All Muslim crew members who wish to visit Mecca and Medina should have in their possession 2 recent passport-size photos. These should bear the crew member's name and C.D.C. number to enable Agent to obtain permission for the pilgrimage. Crew members must also have in their possession the above-mentioned medical certificates, otherwise permission may not be granted to them to visit Mecca and Medina.

RADIO: Masters should give their Agents an ETA not later than 48 hours before arrival. Jeddah Radio "HZH" operates on 500 kc/s. with limited working hours.

TUGS: There are 2 port department tugs 1 of 1,000 and 1 of 700 h.p. These tugs are supplied free for assisting berthing/unberthing of vessels.

REGISTRATION: System in effect.

BERTHING: Berthing Priority. Generally priority in order of arrival, but also following priorities:

(a) Vessels in distress.
(b) Vessels carrying pilgrims and passengers.
(c) Vessels carrying army stores and equipment.
(d) Vessels instructed to have a special priority by the Ministry of Communications.
(e) Vessels carrying livestock.
(f) Vessels carrying explosives and other dangerous goods.
(g) Vessels carrying freezer cargo, fruit, vegetables and perishable goods, foodgrains and flour.
(h) Vessels carrying less than 100 tons of cargo.
(i) Regular mail vessels.

In the inner harbour there is a finger pier connected to the main quay by a Trestle Bridge. The pier accommodates large vessels with a draft of 29 ft. on the Southern side and 32 ft. on the Northern side.

The main quay consists of 8 berths for large vessels with a depth of 30 to 34 ft. alongside. These berths have large warehouses adjacent to each berth. There are 3 more berths which are used by coasting vessels.

Reefer container facilities expected to be available in January 1979 - Maximum capacity 192 TEU.

Facility available only to users of MTI Terminals at Berth Nos. 16, 35 and 36. - Fittings are carrier Kheops Type E 816–129 with socket type R3211, 440–460v., 60 cycles.

Roll-on/Roll-off: Max. draft 8.0 m. Length of berth, 170 m. (4 vessels can berth at one time). Height of Quay, 7.0 m. No linkspan, no tide.

Container Vessels: Berth No. 36 equipped with two container gantry cranes.

The following is part of a Jeddah Port Administration Circular to all Agents in the port.

1. Cellular Container vessels, if self-sustained by ships gear and required shore handling equipment can be considered for preferential berthing on Fridays, when general cargo vessels are not being worked. If a general cargo vessel is displaced by a preferential vessel on a Friday, the general cargo vessel must be back on the berth and working by 0800 hrs. Saturday whether or not the preferential vessel has completed.

There are presently 10 berths available. Vessels are assigned priority by the Government on the basis of national requirements and generally includes vessels carrying passengers, animals, foodstuffs, reefer cargoes and national defence items. There is also a commitment to discharge lift-on/lift-off automobile carriers on Fridays.

In this respect kindly note that Ro/Ro vessels are given preferential berthing — not priority — on the basis that they occupy only a short length of quay, if their cargo is on some form of trailers, or in Containers which can be rapidly placed on trailers, or is wheeled equipment which can be rapidly transported to the Ro/Ro park without congesting the berth.

2. Containers may be handled from barges fitted with ramps, capable of working in a similar manner to Ro/Ro vessels.

3. The operator must supply sufficient lift trucks of required capacity to handle loaded Containers of the vessel and the shore area, as well as sufficient road transport to move the containers from the vessel to the allocated shore area.

4. Allocated shore areas for transit cargoes and not for storage.

5. The Head of Jeddah Customs has instituted a procedure for the rapid clearance of full Containers for one consignee, destined to Jeddah or up-country. Agents are requested to familiarize themselves with this procedure.

6. Failure to move Containers rapidly from an allocated shore area could result in delay in berthing a following vessel of the same line.

7. Kindly note that for several months to come, operators will be required to provide lift trucks for loading Containers on to road transport for delivery to consignees.

8. The Port is preparing suitable land area for the handling and distribution of loaded Containers and a separate area for empty Containers. Handling equipment has been ordered, but, until further notice please be guided by this Circular.

9. Lines presently shipping Containers to Jeddah are requested to confirm their frequency of service and number of units per voyage.

Lines planning expansion of existing services, or the introduction of new services are requested to send details to the Jeddah Port Administration in order to allow proper planning and discussion with the Line concerned to ensure maximum utilization of space and facilities and avoid lengthy delays.

BULK HANDLING FACILITIES: *Grain:* Facilities for handling and storing grain will be available early 1979. Storage capacity 120,000 tons. Discharge rate 500 t.p.h. and loading rate 120 t.p.h. Facilities located adjacent to Berth No. 9.

Cement: Will be handled at Berth No. 18 (Rolaco) and Berth No. 19 (Redec). Capacity about 14,000 tons per day.

STEVEDORES: *Working Hours:* Normally every day except Friday, first shift 0700–1600 hrs., second shift 1800–2400 hrs. Arrangements can be made to work overtime outside these periods. Discharging on barges can be continuous.

BARGES: The Port Department operates about 16 barges of capacities 200 to 400 tons. These are supplied free to the vessels and are used for off-loading steel, drums, heavy lifts and marble.

Sambouks are used for discharging timber and are supplied free but private barges may be used to expedite for which a charge will be made.

TANKERS: The Petromin Jetty can take 2 vessels at its floating pipe-lines. Vessels moor to 2 anchors with stern moorings to buoys. This is solely an oil berth used for discharging/loading tankers and bunkering other vessels.

Also see "Shipmaster's Report No. 2".

CRANES: There are sheerlegs situated on the tip of the finger pier with a lifting capacity of 40 short tons. Vessels can use this appliance for the discharge of heavy lifts.

In addition there are several port department mobile cranes with capacities from 3 to 200 tons used for rehoisting cargoes discharged on barges and handling cargo in the storage areas. These are not normally available to ships. With the exception of heavy lifts discharged by sheerlegs all cargo is handled by ship's gear.

Floating crane 200 ton capacity available.

MEDICAL: Doctors, dentists, eye specialists and hospitals are available.

FRESH WATER: Only available alongside berths as no water barges are available. Rate about 25 t.p.h.

FUEL: Owners requiring bunkers should ask their normal suppliers to arrange the stem through Arabian-American Oil company, New York. The latter will advise their Jeddah office who will in turn confirm the stem with Petromin. Spot bunkers are usually available on cash payment. If the Petromin Jetty is occupied by tankers, vessels requiring bunkers will have to wait until the berth is vacant. Private barges can also supply bunkers and prices are reasonable with no shifting expenses incurred.

Also see "Shipmaster's Report No. 3 and No. 4".

FIRE PRECAUTIONS: A fire-float is available.

REPAIRS: Very limited, due to the difficulty of enabling non-port workers to enter the port area. Facilities exist for repairs to Decca radar.

GANGWAY/DECK WATCHMEN: 2 coastguards are stationed permanently on board and require accommodation and food. Coastguards keep constant check on liquor seals and may search personnel going ashore.

CUSTOMS ALLOWANCE: The consumption of alcohol including beer is prohibited. Ship's bonded stores are sealed by the Coastguard after the vessel has been granted free pratique. Any alcohol found after this will be confiscated and a fine imposed of Riyals 1,000.00 per bottle and possible imprisonment for the offender(s).

REPATRIATION: Several flights daily from Jeddah. A visa is required for entering or leaving the country.
AIRPORT: Situated close to the city. A new airport is under construction about 40 km. to the North.
TIME: GMT plus 3 hours.
HOLIDAYS: Every Friday is a holiday, although vessels can be worked from 0700 to 1000 hrs. to finish, at overtime rates.
SERVICES: Good laundry and ship-chandlering facilities.
SHORE LEAVE: Permitted.
IDENTIFICATION CARDS: Discharge books or passports must be left at the gate, and collected when re-entering the port area.
GENERAL: The Saudi Arabian flag (in good condition) must be flown from 0600 hrs. to sunset.

Communications by cable are lengthy, and about 3 days should be allowed to receive a reply to a cable. Exterior telephone calls require 1 day's notice.

Vessels carrying explosives for discharge Jeddah or any other port are not permitted to berth inside harbour. Such vessels will be discharged at the Outer Anchorage and must be capable of discharging all cargo with ship's gear.
DEVELOPMENTS: By 1982 a total of 45 berths will be available. New facilities will include 7 berths with depths of 14.0 m., enabling the port to handle bulk carriers up to 80,000 d.w.t. (1980) and Third generation container vessels (1978). The approach channel is to be dredged to 16.0 m.

SHIPMASTER'S REPORT No. 1: 1975
Berths: These are good, well fendered, and have depths of 33 ft. alongside most of them.
Anchorages: These are both protected and restricted by the series of coral reefs off the port. Due to congestion, the anchorages are very crowded and it is necessary for ships to moor rather than lie to single anchor. Holding ground is not good and when the afternoon breezes blow strongly it is sometimes prudent to have engines on stand by. At night it is frequently calm and fenders are required as ships make contact.
Bunkers: Bunkers are available by barge. On this vessel's last call ships calling at Jeddah for bunkers only were waiting up to 3 days. On our first call, although bunkers were ordered in good time, they were not delivered at all.
Tugs: There seems to be 2 harbour tugs and a number of smaller ones for towing lighters etc. They seldom appear when ordered, this was confirmed by the pilots.

On our last call, although ship was manoeuvring with difficulty, tugs were not available either for entering port or berthing.
Pilots: Pilots are excellent. Pilot boat waits in El Hariq, North of Qaram Reef. Under no circumstances will Pilot meet ships further out. Departing, Pilot leaves in "Middle Gateway" or before.
Navigation Aids: Port only operates in daylight and there are no lights. The airport radio beacon is very useful especially as in the reduced visibility so often encountered in the Red Sea, nothing is seen visually until the ship is inside the outer dangers.

There are a number of chimneys and water towers visible to the North of the port, but these are not marked on the charts.

The radar picture can be misleading when compared with the coastline on the chart. The strongest echo is given by the anchored ships.

Qaram beacon is lying on its side at present. The wreck on the next reef to the South, which looks like a small ship under way, is usually seen first.
Agency Service: All requests for water, cash, shore labour etc. must be made in good time. At anchor, Agent's launch visits only infrequently. On vessel's last call, Agents did not board ships in the anchorage at all, even though the ship was in a certain amount of trouble. The normal practice seems to be for the Master to go to the agency office himself to chase things up. The office staff are all most pleasant and helpful.

There is good telex communication, except on Fridays, but telephone calls to UK are all but impossible. By local custom, the agency closes at 1400 hrs., reopens at 1900 hrs. daily.

SHIPMASTER'S REPORT No. 2: 1976. Report on New Clean Oil Terminal.
Charts Required: BA 2599 Approaches to Jeddah BA 2577 Jeddah Harbour.
Pilot Station: Lat. 21° 27′ 15″ N. Long. 29° 06′ 00″ E.
Position of New Clean Oil Terminal: Lat. 21° 26′ 55″ N. Long 39° 09′ 20″ E.
Approach to Terminal: Through Middle Gateway, Inner Gateway then South for 10.5 cables.
Depths: Least depth in approach channel 50 ft. and at berth 40 ft.
Moorings at Berth: Both anchors down with 6 shackles of cable on each. 8 Stern lines to buoys, viz 2 lines on each quarter to stern buoys. 2 Quarter lines on Starboard side to Starboard Quarter buoy. 1 line from main deck to Starboard Quarter buoy. 1 line from main deck to Port Quarter buoy.
Cargo Hoses: 3×8 in. Floating cargo hoses connected to Port side manifolds, viz, one for Mogas/Jet fuel, one for A.D.O./Kero and one for Fuel oil. Shore ends of hoses connected to manifolds on causeway. Shore line sizes given as Mogas/Jet Fuel 8 in. A.D.O./Kero 12 in. and Fuel Oil 12 in.
Back Pressure: Back pressure allowed 100/115 p.s.i. giving the following discharge rates. Mogas/Jet Fuel 160 m/t.p.h., A.D.O. 320 m/t.p.h., Kero 340 m/t.p.h. Fuel Oil 300 m/t.p.h.
Bunkers: Fuel Oil and Diesel Oil are shipped at berth after discharge of cargo.
Fresh Water: Not available at berth.
Accommodation Ladder: Rigged on Port side.
Shore Leave: By boat, takes 20 mins to cover the 1 mile distance. No one is allowed to land on the causeway.
Seamens' Identification: To leave dock area seamen must deposit their Seamans I.D. Card, C.D.C. Book or passport at the dock gate. Documents are picked up on return to dock gate.
Communications: Jeddah Radio H.Z.H. can be contacted on 500 kHz. and no traffic lists are sent.

Jeddah Port is now operating a VHF Station "Jeddah Signal Station" which can be contacted on VHF Channel 16, but meantime is only concerned with berthing of dry cargo ships. This VHF station is British manned, but is not in contact with Pilots by radio or telephone.
Tanker Operations Communications: Jeddah Oil Refinery can be contacted on VHF Channel 11 when approaching Pilot station and will pass messages to Agent and inform Pilot when requested to do so. Unfortunately information supplied by using this method is not always reliable as sometimes they don't know what tanker movements are scheduled. Usually Pilot will take vessel into anchorage if discharging berth is not available. No berthing operations are conducted in the Port of Jeddah between the hours of sunset and sunrise.

SHIPMASTER'S REPORT No. 3: July 1977. Bunkering Large Tankers:

The bunker vessel was calling us on Channel 16 as soon as we were clear of the Gulf of Suez. We contacted him about 300 miles away and gave an ETA. Despite these long ranges it was very difficult to contact him when we were approaching the port. The Master speaks reasonable English, and said he was coming out to us and would come alongside on our starboard side.

Our vessel was stopped in the water and the bunker vessel was soon sighted coming towards us. The "Al Jawhara" about 3,000 d.w.t. is registered at Jeddah and manned by South Koreans. They have air-fired heaving lines with soft padded weights at the end. They have adequate fenders and mooring lines and the berthing operation took only 15 minutes. The weather conditions were ideal with no wind or swell. They advised their maximum pumping rate was 800 long t.p.h. During the 8 hours we were bunkering we did not drift any appreciable amount, despite a force 3 wind blowing most of the afternoon from the N.N.W.

The Master of the bunkering vessel intimated that he would not come outside in the future. A vessel of our size, LOA 886 ft. and draft 59 ft. would, in my opinion, have to anchor well South of Qaham beacon. The anchorage area to the West of Qaham beacon was fairly crowded although there were, apparently, fewer ships there than usual.

The Agent boards the vessel and requires a copy of the Crew list. No other officials boarded.

SHIPMASTER'S REPORT No. 4: May 1977.

Vessel anchored in the Outside anchorage (Qaham beacon bearing 137° True × 1.1′) brought up with 6 shackles on the port anchor in 35 fathoms of water, and in a stiff Northerly breeze this seemed to suffice.

Contact was made with the Jeddah signal station when about 30 miles away. Approaching from the South the high rise buildings of Jeddah show clearly at 48 miles on the radar screen. The first visual object sighted was the beacon on Mismari Reef. There is also a wreck on the reef which comes into view at the same time. On this passage along the coast we remained outside 100 fathoms at all times. The coastline South of Jeddah is very sandy and low and does not show readily on the radar. The aero beacon at Jeddah gives a strong signal on the D.F. and can be recommended for an approach bearing. The high rise buildings of the city came into view at about 20 miles.

We were ordered to anchor and await the Pilot outside Quham Reef. The Agents representative arrived unannounced at about 1500 hrs. by launch. He collected the papers for entry and brought with him copies of the papers in Arabic which are required for the Port Authority, Customs and Doctor. He explained that when he received the clearance he would inform the Pilot station. It is necessary to have a Pilot to enter the outer gateway which lies between Jahan Reef to the North and Quham Reef to the South. There is no pilotage from 1800 hrs. to 0700 hrs. in the morning. Our Pilot arrived on board with very little notice at 1100 hrs. He took the ship to the S.W. anchorage and anchored her with Quham Reef beacon bearing 307°(T)×0.82 miles. He explained that with only 14 Pilots employed and with cargo vessels taking priority over bunkering vessels that would account for our delay in entering the harbour. We anchored in 18 fathoms with six shackles on the starboard anchor.

The bunker vessel "Vitoria" arrived alongside at 1515 hrs. with heavy oil only. She commenced bunkering at 1610 and completed at 2210 hrs. for 740 tonnes H.O. The "Vitoria" is quite a sizeable craft with the appearance of a small coaster. She has tyre fenders over the side and in the stiff Northerly breeze ranges freely, however with ample fuel hose there was no movement at the ship's fitting.

The diesel fuel was delivered by a small barge which tied up alongside our port side. The barge arrived at 1630 hrs. and commenced pumping at 1715 to 2030 hrs. for 132 tonnes. The barge then returned to base for a new load and returned to the vessel at 0635 hrs. He bunkered from 0705 to 0855 hrs. for 74 tonnes. His maximum lifting is 150 tonnes. This was not made clear to us by the Agent so any vessel requiring more than 150 tonnes of D.O. will require two lifts plus. The name of the bunkering firm was El Howi. We did not require any fresh water and as it costs 20 U.S. dollars a ton it is not recommended.

There was no shore leave from the anchorage and no cash was drawn. Bum boats are not allowed in the harbour by the Harbour Authorities. A providore called by in his boat but we required no stores.

The pilot boat is a large white craft with raised cabin three-quarter length and has "Pilots" written in black on the side of the cabin. A traffic list is broadcast at 0700 hrs. each morning for ship's berthing. They use Channel 16 for calling and Channel 12 for relaying messages. The Agent states they are not allowed to have a VHF Channel. It would be much better if they did have their own channel for direct communication. The ship's radio station must close when the papers are signed for entry. It is a very busy port with a lot of commercial traffic and also bunkering ships are increasing in number. There were approximately 65 ships at anchor and alongside. The Pilot informed me it was optional to have a Pilot for sailing and as it was very straight forward I sailed on completion of bunkering without having a Pilot. We were under way at 1000 hrs. for a total detention time of 44 hours 3 minutes.

Our vaccination certificates were all in date for three years. But we had no cholera or yellow fever certificates. With going to the outside anchorage I do not think they are too concerned but I think if the vessel had to go alongside for cargo work the authorities would be stricter about the certificates.

The Authorities normally call on board but with the wind blowing fresh they allowed the Agent to come out to collect the papers. The Agent's representative, spoke excellent English and was most helpful. He endeavoured to obtain a Pilot for us after clearing the ship inwards but was unable to do so in the time remaining before 1800 hrs. Therefore I think it is important to be off the port before 1000 hrs. if the vessel is to enter the port. The roadstead anchorage is about 4 miles from the piers and the launch that is used for transporting the Agent is slow. The Agent delivered the clearance before the bunkers were delivered and was in attendance prior to our departure.

ETA's and information sent via Aden Radio 72 hours in advance of arrival. Jeddah only has medium wave station and can be contacted 24 hours in advance of arrival.

Messages sent to Agent and Port Health Jeddah Port Administration: Sample message to Port Health: Vessels name, call letters, British ship ETA 1500 Saturday 7th for bunkers only gross tonnage 7,740 nett, 4234 Last port Lyttelton N.Z. Sailed 16th April Next port of call Patras Greece Crew 42 All well Doctor onboard All crew have smallpox vaccination certificates Stop Vessel has not called at any port infected with cholera or yellow fever.

Master

Documents: Papers required at Port of Jeddah.

Customs:		
Ship's form	Crew List	1 Copy
Ship's form	"NIL" Firearms List	1 Copy
Ship's form	Crew Customs Declaration	1 Copy
Ship's form	Stores List for all Departments	1 Copy
Ship's form	List of Bond and shop	1 Copy
Saudi form	Master's Declaration of spirits	2 Copies
Saudi form	"Israel Boycott"	1 Copy
Immigration:		
Saudi form	Passport Control Office Form 13/14	1 Copy
Ship's form	Crew List	2 Copies
Ship's form	"NIL" Passenger List	1 Copy
Port Control:		
Ship's form	Crew List	1 Copy
Saudi form	Arrival report Port and Lights Administration	4 Copies
Saudi form	Departure report Port and Lights	4 Copies
Doctor:		
Ship's form	Crew List	1 Copy
Ship's form	Vaccination List, Smallpox-Cholera-Yellow Fever	1 Copy
Saudi form	Health Declaration	2 Copies

Agent assists with Saudi forms and has spare copies. Ship's radio must be closed down after signing forms.

AUTHORITY: Saudi Government Railroad Organisation.

AGENT: Gulf Agency Company (Saudi Arabia) Ltd., King Abdul-Aziz Street, POB 2038, Jeddah, Saudi Arabia. tel. 31481, after hours 39434. Telex: 401047 ("GACSHIP SJ"). Cables: "GULFAGENCY".

Copies of correspondence to the Jeddah Office should be sent to Ras Tanura Office.

JIZAN (Gizan): 16.54 N. 42.31 E. (See Plan Book)

ARRIVAL ADVICE: Send ETA's to Agents at Jeddah, also to Jeddah Port Management or Saudi Ports Authority in Riyadh stating "Please forward to Jizan Port Management immediately".

MAX SIZE: Max. draft alongside 19 ft. Max. draft at anchorage 26 ft. Roll-on/Roll-off vessels accepted up to a length of 140 m.

BERTHING: 2 berths available each length 125 m. Roll-on/Roll-off vessels have to discharge with ship's own gear.

BARGES: 2 self-propelled barges with capacity of 400 tons available.

PORT REGULATIONS: *Cement in bags.* Stowage shall be in the square of the hatch, from the bottom layers to the top all bags must be left in pre-slung state in nylon straps having either a canvas or polyethylene base capable of withstanding the load. At least 25% of a bagged cement shipment must be pre-slung.

Financial penalties will be imposed on any vessel failing to comply with these instructions. In addition to these financial penalties Jizan Port Management has authority to expel any vessel and forbid from ever again entering any port of the Kingdom of Saudia Arabia, or can remove any ship from the berth until corrective measures are completed to the satisfaction of Jizan Port Management.

STEVEDORES: Working hours 0730 hrs – 1500 hrs.

CRANES: 4×5 tons, also 2 floating cranes with capacity of 500 tons.

FRESH WATER: Available.

FUEL: Diesel oil available.

DEVELOPMENTS: Dredging of the harbour, outer basin, and approach channel, and reclamation of surrounding land. Construction of 2 berths with a total length of 320 m. and a depth of 10 m. Construction of 2 breakwaters, 3,000 m. in length. Erection of a transit shed, a power substation, port and customs building and other necessary facilities. The 2 berths will be completed by the end of 1978 thus enabling port to receive large ships. When the new berths have been constructed the existing berths will be destroyed. A temporary berth has been built in order to provide berth facilities for barges during construction time.

AUTHORITY: Jizan Port Management – Saudi Ports Authority.

AGENT: See "Jeddah".

JU'AYMAH: 26.56 N. 50.03 W. (See Plan Book)

Also see "Ras Tanura" for Repatriation, Medical, Shore Leave, etc.

OPERATORS: Arabian American Oil Co.

FLAG: In addition to the quarantine signals which are to be shown until pratique is granted, the Saudi Arabian flag must be flown from the vessel's foremast while at Ju'aymah. Vessels should provide themselves with this flag before arrival but, if circumstances render this impossible, such flag may be purchased from the vessel's Agent.

The Saudi Arabian flag is properly displayed when the writing appears on top and the sword on the bottom.

CHARTS AND PUBLICATIONS: Surveys conducted by both American and British authorities in recent years have resulted in the publication of a number of charts of the Port of Ras Tanura and its approaches. The U.S. Defence Mapping Agency hydrographic charts are as follows:

No. 62414 – Approaches to Ras Tanura.
No. 62415 – Channels to Ras Tanura.
No. 62416 – Anchorages of Ras Tanura and Ad-Dammam.

Vessels making for Ras Tanura should be equipped with the latest issue of the above-mentioned charts or the corresponding British Admiralty charts. In addition, it is advisable to supplement the information shown on these charts with other charts of the Gulf and publications such as Sailing Directions and List of Lights.

Current hydrographic information may be obtained by radio from "Middle East Navigation Aid Service (MEGULITE), Bahrain".

IMPORTANT FEATURES:

Ras Tanura Port – General:

1. Aramco Harbour Pilots and Mooring Masters moor, unmoor and supervise the movement of all vessels in the vicinity of the piers, sea islands and buoy mooring berths. Normally, no charge is made for this service.

2. Safety rules are strictly enforced. Receipt of "Instructions to Vessels and Conditions of Use of Port" must be acknowledged before a vessel will be berthed. A thorough vessel inspection will be performed prior to loading to ensure conformity with safety requirements.

3. Aramco maintains a radio station (call letters HZY) for the exchange of messages with ships. All incoming tankers should establish early contact with this station, at least 72 hours before arrival, in order to exchange ETA data, traffic lists, weather advice, port closure advice, etc.

4. When a vessel is scheduled to load cargo at both the Ras Tanura Terminal and the Ju'aymah Terminal, Aramco reserves the right to advise the vessel at which berth the loading shall start and finish.

5. Display of quarantine signals on approach to Ras Tanura or Ju'aymah Terminal must be maintained until pratique has been granted. Ships cannot be berthed until the radio quarantine message has been received. The flag of Saudi Arabia must be flown both day and night throughout the vessel's stay in port.

6. To permit more rapid ship turnaround, an Early Departure Procedure is available. This service provides for a quick departure of the vessel after loading, without the necessity of waiting for the delivery of documents at anchorage. This special service should be requested from the ship's agent at the earliest opportunity.

7. The possession and/or consumption of alcoholic beverages is prohibited within the Kingdom of Saudi Arabia. All alcoholic beverages including beer, table wines and liquors are to be under lock and key during the vessel's stay. Vessels anchored at the anchorages or moored at the piers, sea islands or SPM's are considered to be in the Kingdom of Saudi Arabia. Local officials may carry out inspections to confirm that all alcoholic beverages are kept in locked ship's stores during the vessel's stay.

8. Saudi Arab Government regulations prohibit the taking of photographs of *any* installation at the Port of Ras Tanura. Considerable delay to vessels may be incurred due to governmental investigations of violations of this regulation.

9. No medical facilities are available at the Ju'aymah and Ras Tanura Terminals. Requirements for medical assistance or hospital service should be addressed to the ship's Agent. The Aramco radio station HZY may be used at any time, without charge by vessels at sea, to obtain medical advice.

Ju'Aymah Terminal:

1. The Ju'aymah Terminal loading facilities are located approximately 20 miles N.N.W. of the Ras Tanura Terminal and 7 miles offshore in Saudi Arabian waters. These facilities consist of an oil metering and manifolding platform, a terminal control platform and 6 single point mooring berths.

2. Line handling during mooring and unmooring and connecting and disconnecting of the cargo and bunker hoses are to be performed by the crew of the loading tanker under instructions from the Pilot/Mooring Master.

3. Unless otherwise instructed, vessels must arrive at Ju'aymah with propellers almost covered, and trimmed not more than 8 ft. by the stern.

4. Water, galley fuel and diesel fuels are not available at the Ju'aymah Terminal loading buoys.

5. Small craft are not allowed in the vicinity of the tanker and no one is permitted to board or leave a tanker *while cargo loading operations are in progress.* Should it become urgent to board or leave a tanker for any reason during cargo loading, the Pilot/Mooring Master must be contacted to request permission to shut down the cargo loading operation while the small craft is alongside.

DOCUMENTS: Some of the tankers which will load at Ju'aymah will have called at Ras Tanura first and will have been cleared by Saudi Arabian Government authorities there. The Ras Tanura Quarantine, Customs and Coast Guard clearances will continue in effect at Ju'aymah and no further Goverment formalities will be required. *Seals placed on ships stores at Ras Tanura must remain intact until the tanker has completed loading at Ju'aymah and been completely cleared for departure.*

Those tankers which call only at Ju'aymah will require appropriate arrival clearances. After loading operations are completed at the time of unmooring the tanker must have on board port clearance documents, bill of lading and export manifest. (See "Ras Tanura").

To permit more rapid ship turnaround, an Early Departure Procedure is available by which a ship may clear the port and depart without the necessity of waiting for the delivery of documents at anchorage. Use of this special service is encouraged and it should be requested and arrangements with the Agent should be made at the earliest opportunity. *When operating under Early Departure Procedure, it is imperative that, after departure, HZY Traffic Lists be copied until cargo quantities are resolved and the ship's Agent is authorised to approve documents.*

Arrival Documentation:

The following documents are required for immediate inspection by the boarding Saudi Arab Government officials:

(a) International Maritime Declaration of Health (1 copy from last loading to be surrendered).

(b) Valid deratization or deratization exemption certificate.

(c) Crew list.

(d) Passenger list.

(e) Smallpox vaccination certificates, of date not exceeding 3 years, for all passengers and Crew members.

(f) Certificates of inoculation against any communicable diseases prevailing at the ports of departure.

(g) A complete set of log books covering the period since the vessel's last call at Ras Tanura. In the case of a first visit, Saudi Arab Government officials may require that log books cover the period from the date the vessel's first sailing or from April 25, 1952, whichever date is most recent.

Port Clearance and Cargo Documents: The port clearance documents consist of the following:

(a) Permit of Departure: This form (in English) is filled out with information supplied by tankers in their quarantine radio message.

(b) Port Clearance Application. This form (in Arabic) is filled out with information from the Permit of Departure form.

(c) Saudi Arabian Government Port Clearance. This official port clearance form (in Arabic) must be filled out with information provided by the Port Clearance Application.

Both the Permit of Departure and Port Clearance forms are to be aboard the tanker at the time of unmooring.

The cargo documents consist of the following:

(a) Bill of Lading. This is an Aramco prepared document. The required information, except for the cargo quantity, will be filled prior to the arrival of the tanker and a copy will be given to the Master by the ship's Agent upon arrival of the ship. After the ship finishes loading, Shipping and Documentation Unit will radio the cargo quantities to the Master who will fill in these quantities on this copy of the Bill of Lading and will instruct his Agent to sign, on the Master's behalf, the original Bill of Lading.

(b) Export Goods Manifest. This is a Saudi Arabian government document required for every ship which has loaded cargo in Saudi Arabia. The Master will receive from the ship's Agent the original export goods manifest forms covering each consignment of cargo loaded. It is imperative that the Master deliver these papers to the consignee upon arrival at the discharge port(s).

PILOTAGE/ANCHORAGE: The Northern Holding Anchorage and Ju'aymah Pilot Boarding Area have been laid out to expedite shipping and provide ready access to the Ju'aymah berths. The anchorage area varies in depth from 12 to 28 fathoms (72 to 168 ft.) and holding ground is only fair.

Arriving vessels which have anchored at the Northern Holding Anchorage should immediately advise Aramco, via radio HZY, of the following information:

(a) Time of arrival at the anchorage area (in GMT).

(b) Approximate position in the anchorage area.

They should then contact Aramco Terminal Planning office and Ras Tanura Pilot Office by VHF radio Channel 16 if vessel is equipped with VHF.

NAVIGATION AIDS:

Light Beacon: "J1" – black and white Gp. Fl. (3) every 8 secs. Radar reflector position: 27° 02.0′ N. 50° 07.8′ E.

Light buoys: (all fitted with radar reflectors):

"J2" – Can red – flash red every 6 sec. Position 27° 01.9′ N. 50° 10.8′ E.

"J3" – Conical black – flash white every 10 sec. Position: 27° 00.4′ N. 50° 07.3′ E.

"J4" – Can red – group flash (3) red every 12 sec. Position: 26° 57.45′ N. 50° 09.8′ E.

"J5" – Conical black – group flash (3) white every 12 sec. Position: 26° 58.7′ N. 50° 04.6′ E.

"J6" – Can red – flash red every 5 sec. Position: 26° 54.6′ N. 50° 07.8′ E.

"J7" – Conical black – flash white every 6 sec. Position: 26° 58.7′ N. 50° 02.7′ E.

"J8" – Pillar red – flash red every 3 sec. Position: 26° 54.35′ N. 50° 03.6′ E.

"JE" (Exit buoy) – Can red – flash white every 2 sec. Position: 27° 10.5′ N. 50° 12.6′ E.

"JD" (Departure buoy) – Can red – flash white every 4 sec. Position: 27° 10.5′ N. 50° 24.2′ E.

Red light float: marked "Ju'aymah"

Red – flash white every 10 sec. Racon x-bands (3 cm.) – code response Morse letter Zulu – response pulse length is 22 ml, sweep time is 48 sec. Position: 27° 10.5′ N. 50° 36.0′ E.

Ras Tanura Channel

Light buoy: (Mid-Channel Marker at Caution Area):

"RT 1" – Spherical black – intermittent quick flash white. Position: 26° 56.2′ N. 50° 12.6′ E.

A Northern holding anchorage: area bounded by:

	North	*East*
(a)	27° 08.5′	50° 13.5′
(b)	27° 08.0′	50° 20.0′
(c)	27° 02.05′	50° 17.0′
(d)	27° 03.0′	50° 11.5′

Ras Tanura channel caution area: area bounded by:

	North	*East*
(e)	26° 58.7′	50° 13.0′
(f)	26° 57.0′	50° 15.2′
(g)	26° 54.7′	50° 13.0′
(h)	26° 56.6′	50° 10.7′

Ju'aymah Pilot boarding area: area bounded by:

	North	*East*
(i)	26° 58.7′	50° 13.0′
(j)	26° 56.5′	50° 10.7′
(k)	26° 58.0′	50° 09.5′
(l)	27° 01.0′	50° 10.7′

INBOUND TRAFFIC PROCEDURES: Arriving tankers which will be loading at Ju'aymah, should proceed as follows:

(a) Vessel with no Special Instructions: The vessel should make for a position approximately 2 miles North of Ras Tanura Light Float position 27° 05.6′ N. 50° 57.5′ E. and then enter the inward channel. This will take the vessel past the Approach Buoy to the Entry Buoy. The vessel should then proceed to the Northern Holding Anchorage. The anchor time and position should be passed to the Aramco Terminal Planning Office and Ras Tanura Pilot Office.

(b) Vessel Proceeding to Ju'aymah: The vessel should make for a position approximately 2 miles North of the Ras Tanura Light Float position 27° 05.6′ N. 50° 57.5′ E. and enter the inbound channel. Proceed past the Approach Buoy and Entry Buoy and make for a point approximately 2.5 miles N.E. of Buoy 3A position 26° 56.3′ N. 50° 11.5′ E., and proceed into the Ju'aymah Pilot Boarding Area. The vessel should notify Ras Tanura Pilot Office on passing the Ras Tanura Light Float and will in turn be advised of berthing prospects. Should the Pilot not be boarding immediately on the vessel's arrival, the vessel may be instructed to anchor in the Pilot Boarding Area, and to pass the anchoring time and position to the Ras Tanura Pilot Office.

(c) Vessel Proceeding from Northern Holding Anchorage to Ju'aymah: On receiving instruction to proceed to Ju'aymah, the vessel should heave up anchor and re-enter the inbound channel making for a point approximately 2.5 miles N.E. of Buoy 3A position 26° 56.3′ N. 50° 11.5′ E. and proceed to the designated Ju'aymah Pilot Boarding Area. If the vessel has been advised that the Pilot will not board immediately on arrival, it may be instructed to anchor in the Pilot Boarding Area and await further instructions. The anchoring time and position should be passed to the Ras Tanura Pilot Office.

(d) Vessel Proceeding from Ras Tanura to Ju'aymah: The vessel should depart Ras Tanura and follow the departure channel towards the mid-channel marker buoy, R.T.1, position 26° 56.2′ N. 50° 12.6′ E. The vessel should proceed into the Ju'aymah Pilot Boarding Area, *exercising due diligence in this area.* If the vessel has been advised that the Pilot will not board immediately on

arrival, it may be instructed to anchor in the Pilot Boarding Area and await further instructions. The vessel should inform Ras Tanura Pilot Office of its anchor time and position.

(e) Vessel Proceeding from Ras Tanura to Northern Holding Anchorage: The vessel should leave Ras Tanura and follow the departure channel observing the separation scheme to the Approach Buoy, 27° 06.5′ N. 50° 42.0′ E. and then proceed to the Northern Holding Anchorage. The vessel should inform Ras Tanura Pilot Office of its anchor time and position and await further instructions.

DEPARTURE FROM JU'AYMAH: A separate departure channel has been provided for all vessels using the Ju'aymah facilities. The Pilot will disembark and the vessel will proceed via the departure channel between Light Beacon J 1, 27° 02.0′ N. 50° 07.8′ E. and J 2 buoy 27° 01.9′ N. 50° 10.8′ E. The vessel should then proceed towards the exit buoy JE 27° 10.5′ N. 50° 12.6′ E. and from there set an Easterly course North of JD buoy 27° 10.5′ N. 50° 24.2′ E. to the Ju'aymah Light Float, 27° 10.5′ N. 50° 36.0′ E.

MAX. SIZE: 750,000 d.w.t.

HEALTH: In accordance with international practice, quarantine signals must be displayed by all vessels approaching Ju'aymah. The following signals must be displayed continuously until pratique is granted:

Sunrise to sunset – Quarantine flag
Sunset to sunrise – Signal lights, red over white

Radio Pratique: A modified radio pratique procedure is in use at Ju'aymah. Port conditions permitting, vessels supplying requested quarantine information (see "Radio" 50 word message) may be berthed on arrival and proceed with normal cargo loading operations prior to arrival on board of a Quarantine Officer. Extensive delay can be incurred by vessels failing to supply requested information promptly.

The Quarantine Officer may board vessels awaiting berth in the prescribed anchorage area; however, vessels proceeding directly to a berth will be boarded after being tied up.

Pier personnel are normally allowed on board prior to arrival of the Quarantine Officer.

Vessels at anchor awaiting berth should not rig an accommodation ladder, but instead should be prepared to provide, at short notice, an accommodation ladder rigged in conjunction with a pilot ladder. At night, adequate lighting must be provided.

RADIO: It is required that vessels contact "Aramco Ras Tanura" via HZY and provide a minimum of 3 notices of ETA information at about 72, 48 and 24 hours "steaming time" from the Northern Holding Anchorage. Shorter notices may result in delays and failure to give at least 24 hours notice will result in an addition to allowable laytime in the event a demurrage claim is filed against Aramco.

When it has been determined that a vessel will be loading at the Ju'aymah Terminal, the vessel may be contacted via HZY providing supplementary instructions and requesting any required additional information.

It is imperative that vessels departing under Early Departure Procedure monitor HZY and copy traffic lists after departure until cargo quantities are resolved and the Agent is authorized to approve documents.

Also see "Ras Tanura".

Radio Communications and Messages: The Arabian American Oil Company owns and operates a marine radio station whose call letters are HZY. Radio station HZY is maintained for the purpose of transacting Company business with "in-or-outbound vessels" and is open 24 hours daily. Station HZY will also accept and forward messages concerning ship's agency matters to Agents. However, agency messages to Masters are not permitted. There is no charge for either incoming or outgoing messages.

The marine transmitting antenna of HZY is located at:

Latitude – 26° 18′ 36″ N.
Longitude – 50° 07′ 12″ E.

Due to its inland location Masters are strongly advised NOT to use this antenna for radio direction finding purposes since inaccurate bearings will be obtained due to coastal refraction.

All vessels must endeavour to keep HZY fully advised regarding estimated times of arrival at Ras Tanura, as well as times of actual arrival and position in the anchorage. It is required that vessels provide HZY with a minimum of 3 notices of ETA information, at about 72, 48 and 24 hours "Steaming Time" from Ras Tanura. Shorter notices may result in berthing delay. If loading part cargoes at other Arabian Gulf ports prevents a vessel from furnishing an accurate ETA, steps should be taken to dispatch a message either direct or through the ship's Agent giving the best estimate possible at the time. This message should then be followed by an accurate ETA immediately upon departure for Ras Tanura. Failure to give at least 24 hours notice will result in an addition to allowable laytime in the event a demurrage claim is filed against Aramco.

Upon first contact with all inbound tankers HZY will transmit the following 2 standard messages of 188 and 50 words:

188 Word Message:

Master Rastanuraradio/HZY

Contact HZY soonest advising One ETA GMT Rastanura Two any later changes Three Agents name and requirements Four arrival departure draft fore and aft Five arrival displacement tonnage Six deballasting hours Seven maximum loading rate full-stop Vessel urged to accept highest possible loading rate stop Vessels loading cargo advise previous cargo and if cargo or residue aboard to be co-mingled with Rastanura cargo fullstop If VHF aboard call Aramco pilot station for anchoring, boarding and berthing instructions when 100 miles out on 156.8 Channel 16 or 156.7 Channel 14 stop If no VHF aboard contact HZY 500 kHz and copy traffic lists on odd hours for berthing instructions stop On arrival anchorage advise HZY official readiness time and anchored position stop Radio messages without charge fullstop Pilots require sufficient clean ballast for manoeuvring with propellors almost covered and trim limited to 15 feet for Ras Tanura terminal and 8 feet for Ju'aymah terminal stop Imperative all ships operating under early departure procedure copy Aramco HZY traffic list after departure until cargo quantities are resolved and Agent is Authorized to approve documents.

ARAMCO

50 Word Message

Master Rastanuraradio/HZY

Please advise any epidemic diseases or illness onboard and status of crews international certificates of immunization and all ports called past thirty days also destination stop Agent stop Flag stop Net registered tonnage stop Vessel will not be allowed to berth until this information is received.

ARAMCO

It is important that the Master send a reply to the above 2 messages soonest after receipt.

Traffic list transmitting times and frequencies of HZY are as follows:

Transmits on 12811.3 kHz on even-hours GMT from 0600 to 1400 GMT, and on 8480 kHz on even-hours GMT from 1600 to 0400 GMT.

Listens on 12 mHz common Channels 5 and 6 or 8 mHz common Channels 5 and 6 after traffic list transmissions, until all calls have been cleared. HZY then maintains watch on 12 or 8 mHz common Channel 5 until the next scheduled traffic list.

Transmits on 16960 kHz at 1000 GMT and picks up calls in the 16 mHz band until all traffic is cleared.

Transmits on 430 kHz on all odd-hours GMT after call-up is made on 500 kHz. An alternate working frequency of 521 kHz may also be used during busy periods.

Ras Tanura local time is GMT plus 3 hours.

Weather advice, port closure information, hydrographic notices and traffic lists are "dualled" on 430 kHz and 8480 kHz at 0430 GMT and at 1630 GMT. It is requested that all vessls forward their local weather observations to this station, either in code or plain language, to assist in preparation of the Arabian Gulf forecasts.

There is no charge for incoming traffic or for weather observations from vessels.

Messages to ship's Agents are handled by HZY, free of charge. However, the shipping Agents are not permitted to use HZY for outgoing traffic. Address the message to Aramco and indicate the Agent's name as the first word of the text.

There is an aircraft radio beacon, call sign RT, which transmits on 335 kHz and is located at:

Latitude – 26° 37′ 36″ North
Longitude – 50° 09′ 47″ East.

VHF radiotelephone Channel 10 for radar advisory service, and Channels 14 and 16 are available for ship-to-shore communication at Ras Tanura. Channels 14 and 16 are monitored 24-hours-a-day in the Aramco Terminal Planning Office which is located in Dhahran, approximately 25 miles South of Ras Tanura. Harbour Pilots can be contacted on Channels 14 and 16. VHF equipped vessels should try to contact the Aramco Terminal Planning Office when they are within 100 mile range of the port and while at anchor. Use of VHF while alongside the oil piers to contact the Aramco Terminal Planning Office, Pilots, or Agents is permitted.

To facilitate contacting a vessel after departure, it is important that vessels copy HZY traffic lists for several days after leaving Ras Tanura.

There is a Saudi Arabian wireless station located in Dammam; however, this station does not handle marine traffic.

Radio Silence at Piers: The main wireless and radar equipment of any ship must not be operated while the vessel is alongside the oil piers. Use of VHF while alongside the oil piers to contact the Aramco Terminal Planning Office, Pilots, or Agents is permitted.

VHF: See "Radio"

RADAR: *Radar Surveillance Advisory System.*

A Radar Surveillance Advisory System is available to provide informational assistance and to monitor the movements of all ships calling at the Port of Ras Tanura. All ships entering the Ras Tanura Traffic Separation Scheme shall contact the Ras Tanura Pilot Office on VHF Channel 16 and maintain continuous VHF watch on Channel 10 during their entire stay in the Ras Tanura Port and anchorage areas.

In addition to identifying, tracking and monitoring ship movements to and from the Ras Tanura and Ju'aymah Terminal areas, the following services may be provided to vessel's Masters:

(a) Advise upon channel and port conditions, congestion, weather, tides, navigational aides, etc.
(b) Advise upon the movement of other vessels, dangerous manoeuvring situations, and vessels violating port regulations.
(c) Advise upon port regulations pertaining to movement of deep draft departing vessels and priority of vessels movements. (It may be necessary for incoming vessels to reduce speed to permit safe passage of outgoing deep draft vessels.)
(d) Advise upon berthing prospects and anchoring conditions.

The Radar Surveillance Advisory System has been established in order to increase the safety of ships navigating in the Ras Tanura and Ju'aymah areas. However, it is an information and advisory service only, and in no way assumes control of or responsibility for ships navigating in the area.

TUGS: There are two mooring launches available.

BERTH DESCRIPTION AND FACILITIES: Ju'aymah is an Aramco crude oil and fuel bunker loading facility designed for loading and topping-off deep-draft tankers. The port area is located approximately 20 miles N.N.W. of Ras Tanura and 7 miles offshore in Saudi Arabian waters.

The offshore platforms consist of the following:

(a) An Oil Platform (130 ft. by 390 ft.) located in 50 ft. of water at Lat. 26° 54.8′ N. and Long. 50° 01.2′ E. This platform receives crude oil and fuel bunkers from the onshore storage tanks through 4×56 in. submarine crude pipe-lines and 2×24 in. submarine bunker pipe-lines, each being about 35,770 ft. long. The crude oil and bunkers are metered on this platform. The platform is well lighted with general purpose lighting. In addition, 1 fixed white light has been established on each corner of the platform, with a range of visibility of approximately 5 miles.

(b) A control platform (70 ft. by 70 ft.), located 150 ft. North of the Oil Platform and connected to it by a walkway bridge, houses the communications and radar equipment, testing laboratory, offices, control system and meteorological equipment. This platform is marked by a fixed red aircraft warning light.

6 single point mooring buoys have been established. Crude oil and bunkers are received at each buoy from the oil platform through 1 bunker and 2 crude oil submarine lines which are connected to the buoy by flexible submarine hoses. The floating hoses, which extend approximately 1,100 ft. from each buoy, consist of 2×24 in. crude loading hoses with 16 in. tail hoses, except for Berth No. 34 which has 20 in. tail hoses. Each berth has 1×12 in. bunker loading hose, each with ANSI flanges for connection to the ship's manifold. The max. loading rates through each buoy are 110,000 b.p.h. for crude oil and 5,000 b.p.h. for bunkers, except Berth No. 34 where the loading rate for crude is 130,000 b.p.h. Each buoy is marked by a flashing light with a range of visibility of approximately 5 miles.

The 6 mooring berths at Ju'aymah are as follow:

(a) Ju'aymah Berth No. 31 located at Lat. 26° 55.6′ N. and Long. 50° 02.4′ E. Min. water depth in the berth is 93 ft.

(b) Ju'aymah Berth No. 32 located at Lat. 26° 56.4′ N. and Long. 50° 02.1′ E. Min. water depth in the berth is 102 ft.

(c) Ju'aymah Berth No. 33 located at Lat. 26° 57.0′ N. and Long. 50° 02.7′ E. Min. water depth in the berth is 103 ft.

(d) Ju'aymah Berth No. 34 located at Latitude 26° 56.6′ N. and Longitude 50° 04.3′ E. Minimum water depth in the berth is 124 ft.

(e) Ju'aymah Berth No. 35 located at Latitude 26° 55.6′ N.aand Longitude 50° 03.6′ E. Minimum water depth in the berth is 112 ft.

(f) Ju'aymah Berth No. 36 located at Latitude 26° 55.6′ N. and Longitude 50° 04.9′ E. Minimum water depth in the berth is 122 ft.

The tank farm with all its associated facilities is located along the coast of Ras Al Ju'aymah, 11 miles N.W. of the Ras Tanura Refinery. A small boat pier for the use of pilot boats, mooring launches and Agents' launches is located 8 miles N.W. of the Ju'aymah Tank Farm.

BERTHING PROCEDURE: A Pilot and a Mooring Master will board the arriving tanker asssigned a berth at Ju'aymah at the Pilot Boarding Area located approximately 8 miles East of the Ju'aymah berths. They will carry portable VHF radio sets to be used while on board the tanker for communications with the Ju'aymah Control Platform and the mooring boats. They will advise the Master on all manoeuvres and operations relative to berthing, connecting and disconnecting the hoses and unberthing.

The services of the Pilot and Mooring Master and of the mooring launches and their crews are provided without charge and upon the express understanding that they become the Agents and servants of the Owners and/or charterers of the vessel in every respect. Aramco shall not be responsible and shall be held harmless from all liability for any damage resulting from or caused by any action taken, order given or decision made (or any omission thereof) by the Pilot, Mooring Master or launch crew, or in any respect to the handling of such vessel. Damage or injury to any Aramco facility, equipment or personnel by any vessel calling at any loading terminal of the Port of Ras Tanura shall be the responsibility and liability of the Owners and/or charterers of the vessel.

Mooring equipment and other equipment supplied at Ju'aymah will be lifted aboard the tanker from the mooring launch which transports the Pilot and Mooring Master to the Pilot Boarding Area. This equipment will include such things as special mooring gear to be used at the bow, various gaskets, bolts, tools, adapter spool pieces (when required); and portable radios to be used for communications with the Ju'aymah Control Platform during loading operations.

A number of forms related to the oil loading operation will be carried aboard the tanker by the Pilot and Mooring Master. These include a form for description of pertinent parts of the tanker's loading manifold, an ullage calculation sheet for use by the First Officer of the loading tanker and forms for maintaining a log of the berthing, loading and unberthing operations. One form entitled "Instructions to Vessels and Conditions of Use of Loading Facilities" outlines the conditions of the use of the loading facilities and must be signed by the Master of the tanker prior to the start of the berthing operation.

During the approach and while mooring, the tanker's anchors *must* be secured by stoppers to prevent accidental dropping with subsequent damage to the loading buoy mooring chains or the undersea pipe-lines. Mooring boats will normally assist in the berthing, mooring and hose handling operations. A boat will approach the tanker's bow, take the messenger line and secure it to the end of a 10 in. polypropylene "pickup" line from the mooring arrangement. The "pickup" line will be hove through the centre of port mooring chock until the chafing chain is in the chock. A 15 in. nylon strop which previously will have been secured to the tanker's bollards will then be secured to the chafing chain using a 3 in. bow shackle between the strop and the chafing chain. On tankers equipped with a Smit's towing bracket or brackets, the chafing chain will be secured to an open link in the bracket using a bow shackle. *Mooring and unmooring, connecting and disconnecting of the cargo and bunker hoses is to be performed by the crew of the loading tanker under the direction of the Pilot and Mooring Master.* Communications between the Pilot and the Mooring Master or the bridge and forecastle will be by means of portable VHF radio.

PRELOADING PROCEDURE: Upon completion of berthing, a Pilot/Mooring Master, who will remain on board throughout the loading and unberthing of the tanker, will carry out activities related to Aramco safety requirements and planning, and monitoring of the loading operation.

In order to avoid delays in connecting hoses, tankers scheduled to load cargo and bunkers at Ju'aymah should have an adequate number of reducing spools to fit 20 in., 16 in. and 12 in. standard 150 lb. ANSI flanges on the portside manifold.

Aramco is a member of the Oil Companies International Marine Forum and participates vigorously in a programme developed to ensure adequate safety aboard tankers during the time they are at Aramco piers or berths. A part of this programme involves use of a check list by the Mooring Master to make a thorough inspection of tankers both prior to and during loading operations. This programme is in effect at Ju'aymah, and Mooring Masters who board tankers will be making necessary inspections, posting authorised smoking locations, issuing letters of protest for violations, and shutting down loading or refusing to load a tanker if unsafe conditions are not adequately corrected.

BALLAST REQUIREMENTS: Due to the exposed location of the Ju'aymah berths, tankers scheduled to load crude at Ju'aymah should arrive with adequate clean ballast for safe handling having due regard for existing weather and sea conditions. Tankers will be required to arrive with propellers almost covered and sufficient clean ballast tanks available to allow a trim of 8 ft. by stern. Masters should contact Ras Tanura Pilot Office for weather conditions at the loading facilities.

Aramco is particularly interested in having vessels complete the deballasting operation promptly after berthing in order to minimise time at berth. Simultaneous loading and deballasting is encouraged on properly equipped vessels. Owners/operators or charterers of vessels requiring time to deballast in excess of what Aramco considers standard will be so notified by letter with a copy to the Master.

Discharge into the sea of oil or oil base products in combination with ballast water is not allowed. Since the Ju'aymah Terminal does not have facilities to receive any oil residues or oily ballast water, tankers arriving with such materials on board will be sent to anchorage to await further orders unless the vessel agrees to load on top of such material or unless the ship's Master agrees to segregate such materials in a separate tank. Ships which release oil or oil residues including oily ballast water in either berth or anchorage area will be held responsible for all clean up costs.

LOADING PROCEDURES: The oil loading operation will be controlled by VHF radio voice communications between the Mooring Master on the loading tanker and the Ju'aymah control platform. All operations including switching of tanks and topping off must be directly and personally supervised by a ship's officer. The max. crude loading rate at any of the berths will be 130,000 b.p.h.

Upon being informed by the loading tanker's personnel that the tanker is ready to start loading, the Mooring Master will request the loading operation to proceed according to previously agreed plan with respect to start-up rates, max. loading rates and topping off rates. Need for emergency shut down of loading aboard the tanker must be communicated via VHF from the loading tanker to the Ju'aymah control platform.

In the event of the failure of the VHF communications system, the tanker will sound 5 long blasts on the ship's whistle followed by 1, 2, 3, 4, 5, or 6 short blasts for a tanker at berth 31, 32, 33, 34, 35 and 36 respectively. Loading operations will be stopped and will not be resumed until communications have been re-established.

UNMOORING PROCEDURE AND DEPARTURE: Upon completion of loading, documentation procedures, disconnection and removal of hoses, the tanker will be unberthed by the Mooring Master. To unmoor from the buoy, the pickup rope is taken to the winch and the weight is taken off the chain. The chain is then unshackled and the rope is slacked as the tanker backs out of the berth. The end of the pickup rope is cast off and floats free.

Upon completion of unmooring, the tanker will make a lee, the mooring and hose connecting equipment will be transferred to the mooring launch and the Pilot/Mooring Master will disembark.

The tanker will then be free to leave the port via the Ju'aymah Departure Channel if the Early Departure Procedure is being followed and all cargo and port clearance documents are completed and on board. Otherwise, the tanker must proceed to the Northern Holding Anchorage to await port clearance and document delivery by ship's Agent.

FUEL: Bunkering facilities are operated by Aramco, and fuel bunkers are available at all berths at Ju'aymah Terminal. Vessels are expected to provide adequate advance notice of bunker requirements in order to avoid possible delays.

Vessels taking only bunkers are urged to call at Ras Tanura *prior* to loading cargo elsewhere to avoid delays caused by draft and berth assignment problems.

Masters employing the services of the various bunkering services from the Port of Dammam are not permitted to bunker their vessels within the operating area of the Port of Ras Tanura.

DENSITY: 1025.

POLLUTION: Discharge into the sea of oil or oil base products either alone or in combination with ballast water is not allowed. Since the terminal does not have facilities to receive any significant amount of oil residues or oily ballast water, tankers arriving alongside with such materials on board will be sent to anchorage to await further orders unless the vessel has prior clearance to load on top of such material or unless the ship's Master agrees to segregate such materials in a separate tank. Ships which release oil or oil residues including oily ballast water in either berth or anchorage area will be held responsible for all clean-up costs. The ship's Master shall be expected to acknowledge by his signature receipt of a Pollution Letter of Protest, informing him that a pollution incident attributable to his ship has occurred and that clean-up cost will be billed to the ship Owners.

All incidents of oil discharge to the sea are investigated and documented and these reports are provided to the Saudi Arabian Government officials in accordance with their requirements.

GENERAL: *Oil Inspection:* Independent oil inspection service is available at Ras Tanura and Ju'aymah by the following agencies:

(a) B & R Redwood, Orchard Sea, Winkfield, Nr. Windsor, Berks., England.

(b) Charles Martin, Inspectors of Petroleum, Inc., 61 Broadway, New York, New York 10006, U.S.A.

(c) E. W. Saybolt and Co., S.A., 400 Swenson Drive, Kenilworth, New Jersey 07033, U.S.A

(d) G. Watson Grey, Harrisons Wharf, London Road, Purfleet, Essex, England.

The American Bureau of Shipping, Norske Veritas, and Lloyds of London maintain a marine surveyor at Manama on Bahrain Island.

Ship Agencies: Vessels calling at Ju'aymah should address all ship's business messages to their Agent through "Aramco HZY". Matters concerning provision supply, minor repairs, local medical or hospital services, mail, crew changes, etc. are to be handled by the ship's Agent.

Time Zone: The company generally bases its local time on the 45th meridian (3 hours East of Greenwich). In order to avoid any confusion, all communications should be quoted in GMT.

Arab League Ban: All member states of the Arab League prohibit the export through their ports of any material consigned to Israel. Further, all ships having called at Israeli ports subsequent to April 25, 1952, are banned from Saudi Arabian ports.

Security Patrol Boat: An Aramco Security Patrol Boat will patrol the Ju'aymah offshore area.

Saudi Arabian Government Regulations: Saudi Arabian Government Regulations are strictly enforced, and Masters having any doubts concerning the interpretation of these regulations are urged to consult their Agent. While in port, whether at anchorage or at berth, the vessel's personnel are under the jurisdiction of Saudi Arabian laws.

The taking of photographs while the ship is in the Port of Ras Tanura is prohibited by the Saudi Arabian Government.

All alcoholic beverages, including beer, table wines and liquors are to be under lock and key during a vessel's stay in port. The possession and/or consumption of alcoholic beverages is prohibited in Saudi Arabia. Penalties are severe and major delays to vessels can be incurred by Government investigations of violations.

Port Officials: Saudi Arabian Government Authorities – Customs, Quarantine, Coast Guard, and Port Officials – have offices at various locations at the Ras Tanura Terminal, Ju'aymah Terminal and Rahima. The ship's Master shall make all necessary contact with the Saudi Arabian Government authorities through the ship's Agent.

A United States Consulate General is established near Dhahran, approximately 50 miles South of Ras Tanura.

A British Embassy is established on Bahrain. It is very difficult, however, to contact Bahrain by shore telephone from Ras Tanura or Ju'aymah, and Masters having business there usually arrange to call at the Port of Sitrah (sometimes spelt Sitra).

Inbound Clearance: The ship's Agent will develop information necessary to fill in clearance application and port clearance forms. Cargo requirements will be reconfirmed, and information required to expedite mooring, hose connection and other operational details will be exchanged with the Ras Tanura Pilot Office on VHF radio prior to the tanker's arrival at Ju'aymah.

Import – Export Customs: All materials to be either exported from or imported into Saudi Arabia are subject to examination by customs authorities. The importation of certain articles is strictly prohibited. Such articles include:

— Explosives and firearms, including air rifles.
— Implements of war of any kind, including antiques.
— Alcoholic beverages, including beer and wines.
— Religious matter not pertaining to the Moslem faith.
— Playing cards and gambling devices.
— Narcotics.

Trafficking in these items between ships also is strictly prohibited, whether the ships are at anchor or at berth. The Saudi Arabian Government forbids trafficking between ship crews and shore personnel.

Swimming: Or other activities involving life boats in the vicinity of a tanker are not permitted.

SAFETY REGULATIONS: *General:* The Port of Ras Tanura (including the Ju'aymah Loading Facilities) maintains a vigorous safety programme. Aramco is a member of the Oil Companies International Marine Forum and as such follows the procedures recommended by this organisation. As is done at other Gulf oil ports, the Pilot/Mooring Master as terminal safety representative will discuss in detail with the tanker Master, each item of the "Declaration by Master" which reviews safety requirements and procedures. Prior to start of loading cargo and at several times during the loading, the Pilot/Mooring Master, in company with one of the ship's officers, will check to ensure that safe loading practices are being observed.

Emergency Procedures: In the event of a fire or explosion on board a vessel which is berthed at a Ju'aymah buoy, the course of action to be followed will depend upon the particular facts and circumstances of the incident. It is impossible to indicate exactly what practices will be applied before an evaluation of the specific emergency situation can be made by the Pilot/Mooring Master. His decisions will be based on the following principles:

(*a*) An evaluation of the particular emergency will be made by the Pilot/Mooring Master. His decision as to course of action will be based on the location, type and extent of fire, or explosion, taking into account tide and wind conditions, buoy location and proximity of other vessels.

(*b*) Circumstances permitting, a burning vessel will not be permitted to remain moored to the buoy, and the Master will unmoor the vessel when directed to do so by the Pilot/Mooring Master.

(*c*) Assistance will be rendered by available launches, tugs and other craft to the extent possible, as requested by the Pilot/Mooring Master.

(*d*) Prime consideration governing action to be taken will be to protect personnel, terminal facilities and other vessels, and to contain and control the emergency.

Should a fire or explosion occur at a buoy mooring, the oil loading platform or control platform, all cargo operations will be stopped and all vessels should stand by to disconnect and unmoor when so instructed by the Mooring Master, or when the need to take such action becomes self evident.

The signals for emergency are a continuous ringing of the ship's alarm bells supplemented by 6 short blasts followed by 1 long blast of the ship's whistle or siren. Assistance may be summoned on VHF Channel 16. Location, nature of emergency and type of assistance required should be given.

It is the responsibility of the tanker's personnel to watch its tanks at all times and to give ample warning to reduce the loading rate or shut off the pumping.

Precautions Against Static Ignition: Tanks must be gas-free within 0.4 of the lower flammable limit before loading kerosene, kerosene-type jet fuel, and white diesel. Crude oil and all other products except RLPG may be loaded into tanks which are either gas-free or non-gas-free. Ships' tanks and lines must be free of water. Splash filling is prohibited. Loading rates for kerosene and kerosene-type jet fuel will be reduced as follows:

(a) Loading is commenced at a rate not to exceed 1,000 b.p.h. per cargo tank, until the liquid in each tank has reached a level of 20 ft.

(b) Above the liquid level of 20 ft., the loading rate is limited to 1,500 b.p.h. per cargo tank, maximum.

No ullage gauges, temperature readings or samples shall be taken until at least 30 minutes after loading has been stopped to that tank to allow static charges to dissipate. No loose floating objects are permitted in tanks to be loaded. Automatic tank gauges and non-conductive ullage sticks may be used at any time.

Under certain conditions, the above restrictions will also apply to loading of heavy naphtha and gasoline-type jet fuel (JP-4).

Hydrogen Sulphide Hazards: Aramco crudes may contain dissolved hydrogen sulphide (H_2S) in concentrations which would cause the gases vented during tanker loading to be hazardous if inhaled. We recommend that Masters review the instructions issued by the Owners/charterers about hydrogen sulphide hazards. If the loading of H_2S bearing crude oil is not covered by such instructions, Aramco has available, upon request, a list of recommendations to aid the Masters.

DEVELOPMENTS: A new LNG terminal is presently (July 1978) under construction at Ju'aymah, approximately 2 miles Southward along the coast from the existing Ju'aymah crude export terminal facilities.

The onshore LNG terminal facilities consist of a fractionation centre, propane, butane and natural gasoline storage tanks and refrigeration systems. The offshore loading facilities consist of a 2-berth sea island, located approximately 4 miles offshore. A 32,000 ft. long pipe-line trestle connects the sea island with the onshore tank farm. The sea island is located approximately 3 miles South of the Ju'aymah crude offshore platform and SPM berths.

Until completion of this project in January 1980, all ships, especially those calling at the Ju'aymah crude terminal, are advised to exercise caution as numerous work boats and construction barges may be manoeuvring in the area.

APPENDIX:

Appendix IV:

Arabian American Oil Company
Instructions to Vessels and Conditions of Use
of Ju'aymah Loading Facilities
Ras Tanura, Saudi Arabia

Master S/S – M/V:

1. Vessel will be moored at Ju'aymah Berth No......................
2. Discharge into the sea of oil or oil base products in combination with ballast water is not allowed. Ships which release oil or oily ballast water in either the berth or anchorage area will be held responsible for all clean-up costs.
3. Prior to loading, the Pilot/Mooring Master will inspect the vessel for conformity with safety requirements and will review in detail each item on Aramco Form 5626 "Declaration by Master". This form will be acknowledged and signed by the Master.

Mooring and Manoeuvring:

1. Full power must be available for manoeuvring in and out of the berth. Manoeuvres with other than full power available shall be performed only after the consent of both the Port Captain and Pilot/Mooring Master have been obtained.
2. The Pilot/Mooring Master will advise the Master during the mooring and unmooring of the tanker and will supervise the connecting and disconnecting of cargo and bunker hoses by the tanker's crew. The loading operation will be performed to the complete satisfaction of the Pilot/Mooring Master.
3. Mooring will be accomplished with the assistance of marine craft assigned to the vessel by Aramco.
4. All tank tops, ullage plugs and sighting ports shall be closed before berthing.
5. The vessel's Master shall notify the Mooring Master of any special conditions, difficulties, defective equipment or gear which could impose special hazards when mooring, unmooring or loading cargo.
6. All navigational equipment such as the engine, telegraph, whistle, steering gear, etc., shall be tested prior to getting underway to moor and unmoor. Testing of the tanker's engine when berthed shall be done only after the Pilot/Master has been duly informed and his consent has been obtained.
7. The Mooring Maste. may decline to moor a vessel with unsatisfactory mooring equipment.
8. No repairs are permitted while the vessel is berthed. The engine and deck machinery will be kept ready to permit the vessel to get underway on an emergency basis.
9. Any vessel delay resulting from failure to comply with any of the provisions of this document shall be for the vessel's account.
10. Upon completion of loading and the disconnection of hoses, the vessel will be unmoored and, if using Early Departure Procedures, the Master should make ready to depart as soon as possible. Otherwise, vessels are to await cargo and port clearance documents while lying in stream.

Saudi Arabian Government Port Regulations:

1. Quarantine signals must be displayed upon entering the coastal waters of Saudi Arabia and approaching Ju'aymah in accordance with international practice and shall be continuously displayed until pratique is granted. These signals shall be as follows:
   Sunrise to Sunset – Quarantine Flag.
   Sunset to Sunrise – Quarantine Signal Lights
   (Red over White).
2. The Saudi Arabian flag must be flown from the foremast while your vessel is in the coastal waters of Saudi Arabia. Such flags are available from the ship's Agent. The Saudi Arabian flag is properly displayed when the writing appears on top and the sword on the bottom.
3. Importation and/or use of liquor or contraband items, or trafficking in such items, is absolutely prohibited. The Saudi Arabian Government rigidly enforces these regulations and penalties are severe. In the event of violation considerable delay to the vessel involved could occur.
4. Ship's personnel are not permitted to leave their vessel.

Conditions of use of port.

1. The Master of the vessel shall remain solely responsible for the safety and proper operation of the vessel at all times. Neither Aramco nor its personnel shall be responsible for any loss or damage arising in consequence of any assistance, instructions or advice given or tendered in respect to the vessel.
2. The use of Aramco premises, facilities and equipment is subject to the express understanding and condition that Aramco and its personnel shall be held harmless from all liability, loss or claim thereof arising out of such use.
3. The Pilot/Mooring Master is supplied upon the condition that when boarding or assisting the vessel he becomes the Agent and servant of the Owners and/or charterers of the vessel in every respect. Aramco shall not be responsible and shall be held harmless from all liability for any damage resulting from or caused by any action taken, order given, or decision made (or any omission thereof) by the Pilot/Mooring Master or in respect to his handling of the mooring or cargo loading operations.
4. When the assistance of small craft is supplied (mooring launches and/or a utility boat), the craft, Master and crew thereof shall, in the performance of such services as they render to the vessel, become and be deemed to be the Agents and servants of the Owners and/or charterers of the vessel assisted. Aramco shall not be responsible and shall be held harmless from all liability for any damage that may be done by or to the craft or their crews while assisting the vessel, whether occasioned by any act of omission of the crafts or their crews or by any defect or inadequacy of the craft or the craft's machinery or gear. This shall not give the tanker's Master the right to detain such craft for duties other than mooring, unmooring or hose work nor shall this prevent the craft from being reassigned during mooring, unmooring or hose work.
5. No vessel may berth without an Aramco Pilot/Mooring Master on board.
6. Pilots/Mooring Masters will not assist in the mooring of any vessel unless they have the Master's signature on the acknowledgement below.

Master's Acknowledgement.

I hereby acknowledge receipt of a copy of this document and agree to the Instructions and conditions set forth therein.

....
(Date) (Master)
.... GMT ....
(Hours) (Vessel)

AGENT: Gulf Agency Company Saudi Arabia Aramco Mail Box 621, Ras Tanura, via Dhahran. Cable Address: Confidence Bahrain, stating "for Ras Tanura". Also see "Ras Tanura".

Agent will be responsible for all ships business, which includes obtaining inward and outward clearance, pratique, medical facilities, provisions, repatriation, repairs and diving services.

JUBAIL: 27.05 N. 49.40 E. **(See Plan Book)**

New (Commercial) port under construction.

PILOTAGE: Pilot available.

ARRIVAL/DOCUMENTS: All vessels carrying cargo for Jubail now call directly at Jubail Anchorage for inward clearance and cargo clearance.

Principals/Agents have to provide the following information to the Port Authority prior to call of any vessel at least 15 days before arrival;

Vessel's name
Cargo Quantity: Package/Weight/Measurement
GRT/NRT
Flag
Crew Nationality
Date Built
Consignee
Operator's name
ETA
Whether vessel will discharge at berth or onto barges in anchorage
Draft

If cargo for discharge at berth, then the following information/Documents should be provided:

Berthing application 15 days before the vessels arrival to Port Authority/Harbour Master/Customs Director.
Cargo Stowage Plan/Manifest/Hatch List to Harbour Master.
5 copies Arabic and 5 copies English of Manifest should be submitted to Customs Jubail for cargo clearance.
Also provide information to Coast Guard/Health.

To facilitate processing and approval of request for clearance and berth at the Jubail Commercial Port please include in information the length overall of the vessel, also please provide three (3) copies each of Inward Cargo Manifest. Cargo Stowage Plan and Hatch List (if any).

RESTRICTIONS: Daylight berthing and unberthing only.

TUGS: 2 tugs. 900 h.p. and 1,300 h.p.

VHF: Tugs fitted with VHF and keep watch on Channel 16 and act as "Port Control".

Vessels or Agents can call them under the following call sign for further guidance/anchoring position/berthing instruction and other information:

Call sign: "Jubail Commercial Port Control."

BERTHING: Commercial Port (under construction):

Berth Length	Berth No. 1 to 8 – 212.5 m.
(Containers)	Berth No. 9 to 10 – 300 m.
	Berth No. 11 to 14 – 250 m.
Future Draft:	Berth No. 1 to 6 – 12 m. (11.5 m. allowable draft)
	Berth No. 7 to 14 – 14 m. (13.5 m. allowable draft)

Strength of Jetty: 6 tons per sq. m.
Tide range: 2 m.
Jetty height: 5 m. from LW
3 m. from HW
Project Work: Another 6 berths will be finished by December 1978

The whole commercial port project will be finished at the end of 1979, and container berth will be ready at the end of 1978.

Facilities available: (End January 1979).
5 berths available with depth alongside 14 m. However present draft allowable 9.5 m. at HW and 9 m. at LW.

Cargo sheds and Customs formalities available. A further 2 container berths will be available in June 1979.

The Port Authorities must receive all cargo details and ships particulars well in advance of arrival in order to book berth.

CRANES: 4 × 40 tons, 6 × 20 tons and 2 × 100 tons.

STEVEDORES: 1st shift: 0700–1900 hrs. 2nd Shift: 1900–2400 hrs. 16 gangs available to work 3 vessels at one time.

22 fork lifts available: 10×5 tons, 10×3 tons and 2×20 tons capacity.

MEDICAL: Doctor available.

AIRPORT: Dhahran Airport 120 kms.

DEVELOPMENTS:

Commercial Port: Port for containers and general cargo.

No. of Berths	*Length (m.)*	*Depth (m.)*	*Cargo*	*Completion Date*
2	450	12	General	September 1977
6	1,275	12	General	November 1978
2	500	14	Container	November 1978
6	1,600	14	General	November 1979

Industrial Port:

The Ports Authority has already executed 45% of the construction works in Jubail Industrial Port (March 1978).

The West Pier, consisting of berths No. 1 and 2, with length of 500 m. and a water depth of 6 m., will be completed at the end of 1978. At the same time operations will commence on the first 3 berths of the East Pier (Nos. 3, 4, and 5), with a water depth of 14 m.

The remaining 6 berths of the East Pier, which will be equipped for special cargo throughput, and will be completed at the end of 1979.

The 2,400 m. long open sea terminal for the handling of liquid cargo will allow 4 tankers of up to 300,000 d.w.t. each, to berth simultaneously.

No. of Berths	*Length (m.)*	*Depth (m.)*	*Cargo*	*Completion date*
2	550	6	Salt and Chemicals	December 1978
3	700	14	Raw Material	December 1978
2	600	14	Raw Material	July 1979
4	975	14	Raw Material	December 1979
4	2,400	30	Bulk Liquids	December 1979

AGENT: See "Dammam".

RAS-AL-KHAFJI: 28.25 N. 48.32 E.

Ras-al-Khafji is situated in divided Neutral Zone approximately 60 miles South of Kuwait, this area is under joint jurisdiction of the Saudi Arabian and Kuwaiti authorities; vessels are therefore required to fly the flags of both Governments from the foremast, Saudi Arabia starboard side. Kuwait port side of mast. Onshore base situated in approximately 28° 25′ North, 43° 31′ East, and within a distance of 6 miles (10 km.) offshore, the Company has laid 2 conventional sea-berths and 2 single-buoy moorings for loading tankers and also an anchorage area for cargo ships working cargo. Outside this distance is an anchorage area for tankers.

In addition to exporting crude oil, fuel oil and naphtha are also exported.

OPERATORS: The Arabian Oil Co. Ltd. (Japan).

APPROACHES: Approaches to Ras-al-Khafji marked on appropriate U.S.H.O. and British Admiralty Charts, and are deep enough for majority of vessels using the port to proceed with normal caution using the buoys as centreline markers. A single patch with a depth of 56 ft. (17.07 m.) exists North of courseline between Buoys Nos. 2 and 3, and this necessitates caution on the part of large tankers leaving Ras-al-Khafji in loaded condition.

For tankers arriving Ras-al-Khafji without necessary charts, the full information will be given by telegram if request is sent to "Arabia-oil Kuwait" (via "9KK", Kuwait Radio Station) a few days before arrival. Alternatively, if vessel has VHF, the buoy positions will be given to them upon request to "Ras-al-Khafji" as the vessel approaches, but prior notice of requiring this service should be given in vessel's arrival message.

NAVIGATIONAL AIDS: All geographical positions given although approximately correct, are intended for reference purposes only as certain differences are known to exist between these positions and those shown on the U.S.H.O. and British Admiralty Charts of the area.

Conspicuous Marks. Flare stacks in offshore field and ashore normally visible at a great distance, but may occasionally be extinguished.

No. 1 Flare	Lat. 28° 28.3′ N.	Long. 48° 57.0′ E.
No. 2 Flare	28° 27.0′ N.	48° 54.8′ E.
No. 3 Flare	28° 29.8′ N.	48° 56.0′ E.
No. 4 Flare	28° 30.3′ N.	48° 58.0′ E.
Onshore Flare	28° 24.5′ N.	48° 32.4′ E.

Aids to Navigation:

No. of Light-Buoy	*Lat.*	*Long*	*Characteristic*
1.	28° 36.0′ N.	49° 10.0′ E.	Gp. Fl. (2) 4 sec.
2.	28° 36.0′ N.	49° 00.0′ E.	Fl. 4 sec.
4.	28° 34.9′ N.	48° 51.3′ E.	Fl. R. 4 sec.
5.	28° 32.6′ N.	48° 49.0′ E.	Gp. Fl. (5) 10 sec.
6.	28° 33.8′ N.	48° 48.0′ E.	Fl. R. 3 sec.
7.	28° 32.9′ N.	48° 47.2′ E.	Fl. 4 sec.
8.	28° 33.4′ N.	48° 45.7′ E.	Fl. R. 4 sec.
9.	28° 31.4′ N.	48° 43.9′ E.	Fl. 3 sec.
10.	28° 29.5′ N.	48° 37.8′ E.	Gp. Fl.R(2) 6 sec.
11.	28° 28.3′ N.	48° 39.2′ E.	Fl. 3 sec.
12.	28° 25.6′ N.	48° 36.0′ E.	Fl. R.3 sec.

No. of Light-Buoy	*Colour*	*Height of Light (m.)*	*Visibility (miles)*	*Remarks*
1.	V.S.B.W.	7.0	10.0	Entrance
2.	V.S.B.W.	4.2	7.0	
4.	R.	4.2	4.0	At Reef
5.	B.	7.0	10.0	
6.	R.	4.2	4.0	At Reef
7.	B.	4.2	4.0	
8.	R.	4.2	4.0	
9.	B.	7.0	10.0	
10.	R.	4.2	4.0	Anchorage
11.	B.	4.2	7.0	
12.	R.	4.2	3.5	Shoal

All buoys have radar reflectors.

Khafji Channel:
With the installation of No. 4 sea berth, Khafji Channel for ocean tankers entering to and leaving from AOC berths has been established in a water area North side of the old channel which was removed. The channel area Eastward of Light Buoy No. 2 has never been changed.

For the purpose of securing safe navigation of 250,000 ton tankers with normal caution using the above aids to navigation, sufficient depth of water, 73 ft. at least, and passable channel breadth, 2,100 ft. as minimum corresponding to two times overall length of the mammoth tanker, are allowed.

A "Z" formed patch with the least depth of 70 ft. (21.30 m.) exists at the centre of the channel S.S.E. of Light buoy No. 8, hence deep tankers sailing from berth No. 4, especially under the condition of prevailing tide current, should take caution to the shoal.

If required, a Mooring Master on duty will guide a deep tanker to the favourable position in the channel.

DOCUMENTS: *(a)* Clearance. Master should submit following documents to Saudi Arabian Government through Agent (2 copies each):

Maritime Declaration of Health.
Health Condition of Crew.
Details of Air-conditioning.
Crew List.
Vaccination List.
Passenger List (if any).

Note Forms 1–3 are supplied by the Agent.

(b) Cargo. All cargo documents and shore figures are usually prepared on shore, and this takes about 1.5 hours with a further 30 minutes before the documents arrive at the ship. Ship's Statement osf Cargo is, however, prepared on board. Wherever necessary Mooring-Master will sign documents on behalf of the Company.

Following cargo documents are to be completed after loading:
Notice of Readiness.
Bill of Lading.
Time Sheet.
Ship's Statement of Cargo*.
Certificate of Delivery‡.

Note: *Ship's Statement of Cargo includes the items for "clean ballast declaration" and "dry inspection" altogether in one form.

‡Certificate of Delivery should be handed to ship's Agent at port of discharge for certification by Customs Authorities. Agent should then return Certificates to the Company as soon as possible. Non-compliance with this requirement could involve vessel in serious difficulty. Masters therefore advised to ensure that their Agents at each discharging port return the Certificates at the earliest possible moment.

All certificates are to be sent direct to Arabian Oil Company and the Agents should be notified accordingly. It is understood that Arabian Oil Co. do not require legalised certificates and only certificates attested by the Customs at discharging ports will suffice.

EARLY DEPARTURE DOCUMENTATION: This documentation system aims to assist ships to depart early from this port after they complete loading by saving time awaiting documents. For this reason, relevant tanker documents will be signed previously by ship's Master or signed by their Agents at this port, depending on Master's choice on the request sheet. Completed tanker documents, therefore, will not be despatched to ships after completion of loading.

It must be noted that this system is not compulsory at this port, but it is at Master's option on condition that ships can communicate on Harbour Service VHF Radio or Marine Communication Band 2150 mc/s. to receive shore figures and time after departure.

READINESS: Master should present Notice of Readiness to load to Company's Mooring Master who will sign it on behalf of the Company. The Notice should be tendered as the time of the vessel's arrival at tanker anchorage area, which is, in principle, understood to be either time of dropping anchor in anchorage, or if vessel does not anchor, the time that Mooring Master boards to commence berthing.

MOORING MASTER: Compulsory for berthing and unberthing at Ras-al-Khafji, and Company's Mooring Masters will board vessels at anchorage area to take them to allocated berths. After berthing, Mooring Master will remain on board vessel until it is unberthed and cargo documents are completed. During this time he will act as the Company's representative in charge of all operations and shore personnel where the Company is concerned.

Notwithstanding presence of Company's Mooring Master on board, the Master of the vessel remains responsible for his vessel at all times and in all respects. In event of any emergency, however, the necessary steps should be taken by joint action between the Master and the Mooring Master.

The Master of each vessel shall give to Mooring Master all information necessary for safe handling and safe operation of vessel while it is in berth.

BALLAST: All vessels required to have on board sufficient clean ballast to give safe draft for manoeuvring purposes. Vessel arriving with too little ballast may be required to increase quantity, should Mooring Master feel that it would not be safe to berth vessel in its arrived condition. Recommended arrival condition is with propeller completely or almost completely immersed and vessel trimmed not more than 10 ft. (3.05 m.) by stern.

In good weather conditions, Mooring Masters will normally permit vessels to start deballasting as they approach the berth in order to save ship's time.

BOARDING: All vessels required to provide safe means of access for personnel boarding and leaving and should have accommodation ladder rigged on port side. In the case of vessels assigned to Berth No. 3, an accommodation ladder which leads down forwards is liable to be blocked by floating hoses, and in such cases the ladder should be rigged on starboard side. A ladder aft is always suitable on the port side.

For the benefit of people boarding at the anchorage area, vessels should provide a safe means of access on the lee side.

ANCHORAGE: *(A) Tankers:* Within 1 mile radius of position 28° 29.5′ N. 48° 39.0′ E. The Western extremity of tanker anchorage is marked by No. 10 Lighted Buoy. The depth of water varies from 65 ft. (19.81 m.) to 79 ft. (24.08 m.), the major depth of water is more than 70 ft. (21.33 m.), with a generally good anchor holding ground of clay mud. Vessels should anchor as close as possible to this lightbuoy to await berthing.

(b) Dry-cargo. Anchorage for dry-cargo ships located about 4 miles to West of tanker anchorage, and is centred in position 28° 26′ 08″ N., 48° 33′ 04″ E. and marked by a flashing white buoy. Cargo ships should anchor within 0.5 miles radius of this buoy, where depths are between 36 ft. (10.97 m.) to 50 ft. (15.24 m.) in good holding ground of clayey mud.

(c) Prohibited Area. An area bounded by straight lines joining following points is prohibited to anchoring and fishing due to presence of well-heads, Flow Stations, Gathering Station, etc. and numerous pipe-lines and power transmission cables on the sea bed. Additionally, the area bounded by 5 light-buoys is prohibited to navigation by all vessels or craft except those operating on direct instructions from the Company.

	Lat.	*Long.*	
(a)	28° 24′ 48″ N.	48° 31′ 57″ E.	
(b)	28° 25′ 33″ N.	48° 32′ 55″ E.	
(c)	28° 26′ 45″ N.	48° 35′ 16″ E.	
(d)	28° 25′ 50″ N.	48° 35′ 40″ E.	
(e)	28° 29′ 04″ N.	48° 52′ 34″ E.	
(f)	28° 32′ 00″ N.	48° 54′ 00″ E.	Red. Fl. Yellow 3 secs.
(g)	28° 35′ 00″ N.	49° 00′ 00″ E.	Red. Fl. Yellow 3 secs.
(h)	28° 32′ 00″ N.	49° 04′ 00″ E.	Red. Fl. Red 3 secs.
(i)	28° 28′ 00″ N.	49° 04′ 00″ E.	Red. Fl. Red 3 secs.
(j)	28° 24′ 00″ N.	48° 52′ 00″ E.	Red. Fl. Red 3 secs.
(k)	28° 26′ 53″ N.	48° 52′ 00″ E.	
(l)	28° 23′ 13″ N.	48° 31′ 48″ E.	

MAX. SIZE:

Berth	*Depth of water at ISLW* (ft.)	*Max. Permitted draft* (ft.)	*Designed tanker size* (d.w.t.)
No. 1	53	47	100,000
No. 2	56	50	100,000
No. 3	59–64	54*	165,000
No. 4	69–73	64‡	250,000

*56 ft. permissible using rise of tide.

‡66 ft. permissible using rise of tide.

Largest tanker so far handled at Ras al Khafji Port:

"Maasbracht" (313,755 d.w.t.) loaded some 224,000 long tons of crude oil at Berth No. 4.

HEALTH: No radio pratique will be given. Vessels must be cleared by quarantine office on arrival. (In the past, tankers were given free pratique at the request of Agents and on the production of the copy of telegrams from vessels confirming that all crew members possess valid cholera and vaccination certificates and that there is no sickness on board. This procedure has changed recently and all vessels are boarded by quarantine officer and pratique is given only after checking the documents concerned.)

RADIO: (Also see "Approaches"). Advise ETA Khafji at least 4 days, and again 1 day, before arrival through normal radio services. As an alternative to the route through Kuwait Radio Station (call sign: 9KK), vessels may send their first message through Singapore, Bombay or Bahrain Radios. Confirmation of ETA should be made a few hours before arrival by calling "Ras-al-Khafji" on Channel 16 VHF. All cables should be addressed to "Arabia-oil Kuwait".

The first message should be sent according to following form, but any items which are the same as a recent previous voyage to this port may be omitted.

1. ETA Ras-al-Khafji
2. Last port
3. Deballasting time
4. Quantity and type of cargo and bunkers required
5. Maximum loading rate
6. Diameter of cargo and bunker connections
7. Distance from manifold to ship's side
8. Derrick capacity
9. Whether Ras-al-Khafji is first or second port (when taking part cargo)

Note: Item (9) should only be answered in cases where vessels are taking part cargo at Ras-al-Khafji. If second port, the first loading port should be mentioned.

Communications between shore and loading berth mainly sent and received by means of FM wireless telephone, which is brought on board tankers at time of arrival.

VHF: Short-range communication can be made with Terminal Office by calling "Ras-al-Khafji" on VHF Channel 16. Working Channels are 9, 11, 12, 13 and 14. Vessels should call Ras-al-Khafji several hours before arrival to confirm ETA and receive berthing instructions. After anchoring they should advise their anchoring time and then maintain watch on Channel 16 until the Mooring-Master boards. Terminal VHF normally operative between 0400–1400 hrs. GMT, and is used outside these hours by special arrangements with individual ships.

TUGS: The undermentioned tug-boats are available for mooring and unmooring purposes: "Chiyoda Maru No. 2" 200 g.r.t., 1,320 b.h.p.; "Chiyoda Maru No. 3" 175 g.r.t., 1,320 b.h.p.; "Chiyoda Maru No. 4" 236 g.r.t., 2,200 b.h.p.

One of these tugs stands by near the berths as long as any vessel remains moored. Two mooring boats are used for handling ropes and hoses.

BERTHING: 1. Personnel. After vessels berthed, Company's Loading Operator and Mooring Crew will board. Loading Operators work shifts and there will always be one on board vessel while in berth. This man acts as assistant to Mooring-Master, and should be treated as such at all times. In particular he will carry out Safety Inspections and handle communications between ship and shore, particularly those communications regarding cargo.

Ship's personnel requested to give Loading Operator all required information and necessary assistance to allow him to do his job properly. Any disputes arising from his actions should be referred to Mooring-Master for final decision.

Mooring Crew will connect and disconnect hoses as required, but may at any time be transferred to another vessel for the same purpose. While they remain on board, vessels are requested to provide them with following: use of Smoking Room, toilet and washing facilities; hot and cold drinking water; utensils for eating and drinking (it is not normally necessary to supply food).

2. Description of berths.

(a) Sea-Berth No. 1

Position: 28° 26′ 10″ N., 48° 34′ 57″ E.

Depth: 53 ft. (16.15 m.) at ISLW.

Permitted draft: 47 ft. (14.33 m.) max.

Type of berth: conventional 4-buoy system where vessel moors to 2 anchors and 1 buoy forward and to 3 buoys aft.

Length: Designed for tankers of 800 ft. (245 m.) length but can be used by tankers of any size, although tankers of less than 650 ft. (200 m.) overall length sometimes experience difficulty in mooring if their lines are less than a full 720 ft. (220 m.).

Submarine Pipe-lines and Hoses: From the ex-Loading Dock one 26 in. crude oil line and 1×18 in. fuel oil line have been laid to the manifold position. 2×10 in. rubber hoses for crude oil and 1×12 in. rubber hose for fuel oils are connected to ship's manifold. These hoses approximately 225 ft. (69 m.) long and maximum lifting weight of the 2 crude oil hoses together is 4.5–5 tons. For bunkering purposes 1 section of 6in. hose is attached to the end of the 12 in. fuel oil hose.

(b) Sea-Berth No. 2

Position: 28° 25′ 55″ N., 48° 35′ 28″ E.

Depth: 56 ft. (17.07 m.) at ISLW.

Permitted draft: 50 ft. (15.24 m.) max.

Type of berth: As Berth No. 1.

Length of berth: As Berth No. 1.

Submarine Pipe-lines and Hoses: From the ex-Loading Dock 1×26 in. crude oil line, 1×10 in. bunker line and 1×4 in. marine diesel line have been laid to the manifold position. 2×10 in. rubber hoses for crude oil, 1×6 in. rubber hose for bunkers and 1×4 in. rubber hose for marine diesel oil are connected to ship's manifold. All these hoses approximately 225 ft. (69 m.) in length, and the maximum lifting weight of 2 crude oil hoses together is 4.5–5 tons.

(c) Loading Rates at Berths No. 1 and No. 2
Crude oil rate is 30,000 bbls/hr. or 4,000 tons/hr.
Fuel oil loading rate at Berth No. 1 is 7,000 bbls/hr. or 1,000 tons/hr.

(d) Preparation on board before Berthing at Berths No. 1 and No. 2
Vessels should have ready:

(i) Both anchors.

(ii) 3 ropes forward and 9 ropes aft.
Some wires are acceptable in place of equivalent number of ropes. No shore wires used from buoys to ship. All ropes and wires should be in good condition and preferably without splices.

(iii) Port derrick rigged for minimum lifft of 5 tons, using a wire runner and a hook.

(iv) 2×10 in. ASA 150 hose connections for crude oil, and 1×12 in. ASA 150 for fuel oil cargo (at Berth No. 1 only), at the ship's port side manifold.
If ASA 150 is not available, the Company should be advised before arrival.

(e) Mooring and Unmooring at Berths No. 1 and No. 2
On approaching berth a ship's line is passed to one tug from centre fairlead aft. This line should be of good strength and well made fast on board.

When in position off berth, starboard anchor is let go and slacked away easily to about 9 or 10 shackles on deck. Port anchor is then let go and paid out easily as vessel swings round into berth using tugs and engines as required. At same time, starboard anchor is hove-in to about 6 or 7 shackles on deck and then made ready for slacking away again.

As vessel backs down berth the anchors are slacked away as necessary, and ropes sent to forward (No. 4) buoy. When stern passes close to starboard quarter (No. 1) buoy, ropes are sent away to this buoy, hove-in tight and put on bitts ready for slacking if necessary. Ropes then run to port quarter (No. 3) buoy, hove tight, and lateral position in berth adjusted between port and starboard quarter buoys. Lastly, ropes are run to the stern (No. 2) buoy and tug line also passed to this buoy. The fore-and-aft position is then adjusted between the anchors and the sternlines. A second tug is used to assist in lateral positioning of the vessel, and 2 mooring boats are used for running lines to buoys, normally taking 2 ropes at a time.

In Wintertime 3 ropes are used to each buoy, but in Summer 2 of these may be dispensed with at Mooring Master's discretion.

When properly positioned in berth, distance from ship's side to manifold marker buoy should be about 50-66 ft. (15–20 m.).

When hose disconnection completed, vessel unmoors by letting go all lines on buoys No. 3 and No. 4, followed by those on buoy No. 2 and lastly those on buoy No. 1. Vessel then heaves both anchors as necessary until they are up and clear, and vessel can leave berth.

Tugs used as required to keep vessel away from manifold marker and mooring buoys.

Mooring-Master may vary this procedure according to prevailing weather.

(f) Hose Connection and Disconnection at Berths No. 1 and No. 2
After completion of mooring, mooring boat will pull hosemarker buoys to ship, and connect to ship's port derrick runner. The 2 crude oil hoses are lifted together from seabed by ship's derrick, and connected directly to manifold by Company's Crew.

Fuel oil hose at Berth No. 1 is lifted separately and connected in similar manner.

Time taken for hose connection about 1–1.5 hours depending on number of hoses connected. Hose disconnection takes about 1 hour, and is done in reverse manner to connection.

(g) Loading Restriction at Berths No. 1 and No. 2
Due to there being only 1 cargo pipe-line between ex-Loading Dock and the shore, it is not possible to load vessels in berths No. 1 and No. 2 simultaneously. Therefore, when these berths both occupied, 1 vessel will be loading while the other is deballasting; the latter arranging to finish ballast about 1 hour before the other vessel finishes cargo.

(h) General Description of Berth No. 3
Position: 28° 27′ 06″ N., 48° 36′ 28″ E.

Depth: 62–64 ft. (18.90–19.51 m.), but 59 ft. (17.98 m.) over pipe-lines, at ISLW.

Permitted draft: Normally 54 ft. (16.46 m.), but 56 ft. (17.07 m.) permissible using rise of tide.

Type of berth: Single-buoy-mooring system consisting of a buoy 30 ft. (9.14 m.) in diameter, moored to 8 pendant legs of 3.5 in. high strength chain shackled to anchor piles at a radius of 575 ft. (175 m.), and having a rotating deck carrying pipe-line and mooring connections.

Moorings: Attached to mooring connections on the buoy are 2×12 in. nylon ropes (97 mm. dia., breaking strain 150 tons). These ropes are 120 ft. (37 m.) long, and have at their free end a length of stud link chain which includes a "sister-plate" for receiving the shackles used on deck of tanker. From outer end of this chain is connected a 10 in. polypropylene "pick-up" rope about 180 ft. (55 m.) in length. Rope supported by "doughnut" floats, and chain hung by large plastic buoys 5 ft. in diameter, coloured red and green.

Submarine pipe-lines and hoses: 1×36 in. crude oil line and 2×12 in. fuel oil lines have been laid approximately 30,000 ft. (9 km.) from shore to position close under buoy. From underwater manifold the crude oil goes to the buoy through 20 in. underwater hose; fuel oil lines joined at manifold and fuel oil led to buoy through 1×10 in. submarine hose. From deck to buoy 20 in. crude oil hose and 10 in. fuel oil hose are supported by floats, and have a length of 690 ft. (210 m.) to a hose raft, at which position the 20 in. hose is divided into 3 strings of 12 in. floating hose. These, together with the 10 in. fuel oil hose, extended for a further 180 ft. (55 m) making a total length of 870 ft. (265 m.) including the raft. At their free end the hoses are paired and connected to 2 large plastic buoys each 4 ft. in diameter.

Loading Rate: Maximum loading rate of crude oil is 45,000 b.p.h. or 6,200 t.p.h. The fuel oil loading rate is 5,000 b.p.h. or 700 t.p.h.

(i) Preparation on Board before Berthing at Berth No. 3
Before arriving at anchorage, vessels assigned to Berth No. 3 should have ready:

(a) 2 mooring ropes forward, together with rope stoppers, and also 1 or 2 steel crowbars.

(b) Port derrick rigged for 10 tons, or maximum lift if 5–10 tons.

(c) 3×12 in. ASA 150 hose connections for crude oil, and 1×10 in. ASA 150 for fuel oil cargo, at the port side manifold. If ASA 150 is not available, the Company should be advised before arrival.

(j) Mooring at Berth No. 3
Mooring Master will board from tug which carries mooring and hose connection materials. Vessels should have crew standing-by ready to receive these materials, and should maintain a lee until this is completed.

Mooring Master will instruct crew in setting-up of forward mooring, where 2×12 in. nylon ropes are made fast round port and starboard bitts with their attached shackles about 12 ft. (3.66 m.) inboard from the fairleads of panama leads as far forward as possible. Size of fairlead opening should be at least 12 in. to prevent chain jamming in fairleads.

Approaching berth, tanker should lower a mooring rope from each bow as a messenger. Mooring boat will take port rope first, and connect it to the port "pick-up" rope which should then be hove-in while the boat returns to take the starboard rope for connection to its "pick-up" rope. These two ropes are then hove-in until the chains come into the fairleads, and the shackles can be made fast in the "sister-plates". The "pick-up" ropes are then slacked back until the nylon ropes have the weight.

Usual time from sending away first line until all fast is about 20 minutes.

(k) Unmooring from Berth No. 3
After hose disconnection completed, the weight is taken on "pick-up" ropes, nylon ropes are unshackled, and as vessel backs off berth the "pick-up" ropes are slacked off and then dropped into the water. The tug will come alongside either before or after vessel backs off berth, whichever is convenient, and the nylon ropes and the 2 big shackles are passed to the tug. Unmooring time usually 10 minutes.

(l) Hose Connection and Disconnection at Berth No. 3
After completion of mooring, the mooring boat which has been holding the hoses clear during berthing, will bring the hoses to the ship and connect the derrick runner to the buoy having 2×12 in. crude oil hoses. These are usually lifted aboard together and connected directly to ship's manifold, making any necessary separation of hoses as may be required according to lifting capacity of ship's derrick.

The hoses are hung off on 2 in. diameter nylon ropes and lashed to the rail to prevent shock loads due to wave action being transmitted to manifold flanges.

After the first pair of hoses have been connected, the second buoy is lifted and the remaining crude oil hose and the fuel oil hose connected in similar manner to the first 2 hoses. If a vessel requires a loading rate of 5,000 t.p.h. or less, only 2 crude oil hoses are connected. According to the number of hoses to be connected, connection takes 1.5–2.5 hours.

Hose disconnection is done in a reverse manner to connection, and takes about 1–1.5 hours.

(m) Berth No. 4 (S.B.M.).
The S.B.M. is located in a position Lat. 28° 27.9′ N. Long. 48° 38.6′ E., approx. 12,300 ft. E.N.E. of Berth No. 3.

Tanker manoeuvring area is designated within 2,000 ft. (609 m.) radius from the S.B.M. Since 2 loading pipe-lines are trenched under sea bed, the area is imposed on prohibition of vessels' anchoring.

The water depth in the area has been recorded 70 – 73 ft. (21.33 – 22.25 m.) except 69.5 ft. (21.18 m.) above the pipe-lines by precise echo-sounding.

The deepest draft of tanker is normally 64 ft. (19.50 m.), but 66 ft. (20.10 m.) is permittable using rise of tide.

Berth Loading Control Platform: An oil-well jacket type Berth Loading Control Platform with a rotating light-beacon, atypical of offshore valve station, is located in a position Lat. 28° 27.0′ N., Long. 48° 35.8′ E., about 3,600 ft. (1,500 m.) Westward of Berth No. 3. The light, Fl. R. ev. 10 sec. 16 M. (Ra. Ref.), is visible at a great distance.

Crude floating hose: From S.B.M. to floating manifold length 810 ft., diameter 24 in., test pressure 200 p.s.i., 1 line weight 3,460 kg.

From floating manifold to hose line close to tanker: Number of hoses 3. Nominal size 14 in., length 150 ft. Test pressure 200 p.s.i., weight 2,080 kg.

Floating Bunker Hose: One line of 10 in. diameter. Length 260 ft., test pressure 200 p.s.i., weight 1,210 kg.

Loading rate: Crude 40,000 – 60,000 b.p.h. Bunker light fuel min. 1,860 b.p.h., heavy fuel min. 2,000 b.p.h.

Weight of Hose Lines:

Height of Loading Deck above sea surface	*Hose Length*	*Weight 1×14 in. Hose Line (kg.)*	*1×14 in. + 1×10 in. Hose Lines (kg.)*
30 ft. (9.14 m.)	40 ft. (12.2 m.)	3,600	5,500
40 ft. (12.20 m.)	50 ft. (15.2 m.)	4,600	6,100
50 ft. (15.24 m.)	60 ft. (18.3 m.)	5,600	6,700
60 ft. (18.29 m.)	70 ft. (21.3 m.)	6,600	7,300

Note: The above figures include the weight of crude oil, marker buoy, lifting chains and fittings.

LOADING: Loading crude cargo on top of oily residue is acceptable.

(a) Dry Inspection. Upon completion of deballasting the Mooring-Master will inspect the tanks.

If the tanks are not satisfactory, he may require further pumping until such time as they reach the required standard.

(b) Loading Operations. When ship is ready for loading, ship's officer must inform Loading Operator who will transmit necessary orders to Control Room on shore.

Loading is started by booster pump, and after everything has been checked and found satisfactory on board loading rate will be gradually increased by starting further booster pumps and then main pumps in sequence until the required loading rate is reached; provided always that required rate is within capacity of the pumps.

Loading rates can be varied at any time during loading upon 5-10 minutes notice to the Mooring-Master or Loading Operator on board.

In emergency, the immediate stopping of all loading can be accomplished.

When loading is completing, the rate is gradually reduced first by stopping the main pumps and latterly the booster pumps, one by one according to the request of the ship's officer. At the final stage of loading only booster pumps should be on the line, and the ship's officer should tell the Loading Operator to "Stand-by" at least 5-10 minutes before finishing cargo.

Shore pumps will stop about 15 seconds after their control buttons are pressed, but the oil will continue to flow for several minutes, depending on amount of time since main pumps were stopped.

All stops for cargo completion must be given by the ship, as "shore-stop" is *NOT* practised at this port.

(c) Overflows and Spillage. In the event of overflow or spillage during loading, cargo will be stopped immediately and will remain stopped until such time as Mooring Master considers it safe to resume loading. This will normally be when all the overflowed oil has been cleared off the deck and there is no longer any unusual danger involved. It is ship's responsibility to clear oil away as soon as possible after occurrence.

(d) Ullaging and Gauging. After loading completed, Mooring Master will witness final ullaging on board so that ship's figures can be calculated.

On shore a group of Government and Company gaugers will take manual gauges of the shore tanks before and after loading, and from these gauges the Bill of Lading figures will be calculated.

(e) Saybolt Inspection. The oil inspectors of E.W. Saybolt & Co., S.A., based in Mina Abdullah, Kuwait, are available at this port upon consignee's special request. They will carry out or witness gauging of the shore tanks, dry inspection and ullaging of the ship's tanks, calculation of shore and ship's figures, analysis of oils, etc., issuing the necessary certificates according to consignee's requirements.

STEVEDORES: Dry-cargo vessels calling Ras-al-Khafji to give at least 72 hours notice to Agents to arrange labourers. Stevedores will be arranged from Kuwait. Ship's gear used for discharging which takes place at anchorage into barges.

MEDICAL: Company operates a clinic and a hospital at Ras-al-Khafji. Medical and dental treatment can be given in cases of emergency or serious illness or injury. Epidemic diseases or cases of serious injury or disease requiring operations, etc. are normally transferred to State hospitals in Kuwait. Company's doctor will not normally attend on board unless patient is incapable of attending clinic. Requests for medical attention should be given to ship's Agent as early as possible before arrival.

FRESH WATER: Not available except in cases of extreme emergency.

FUEL: (Also see "Berthing").

(a) Grades. Marine diesel oil (MDO), light bunker oil (LBO) and heavy bunker oil (HBO) are supplied. Each loading berth has pipeline which can deliver light and heavy bunker oils, but only Berth No. 2 has marine diesel line. At Berths No. 1 and No. 3, marine diesel oil supplied from barge for which no extra charge made.

"Bunkering Information" booklet, which gives full details of bunkering services at this port, is available from the Company upon request.

(b) Bunker Nomination. Owners, Operators or Charterers should nominate their vessels' bunker requirements *to the Company's Head Office in Tokyo.*

Vessels requested confirm grade and quantity of bunkers required *direct to "Arabia-oil Kuwait"* (via "9KK") through normal radio services at least 4 days before arrival; or in cases where vessels receive instructions less than 4 days away, they should advise bunker requirements as soon as possible.

(c) Bunkering Operation. Bunkers normally supplied to vessels in berths while they are discharging ballast or loading crude oil. At Berths No. 1 and No. 3 MDO supply from a barge will be done usually before loading cargo.

Except in special circumstances when previously agreed, bunker supply is Stopped Onshore when requested quantity has been pumped according to shore tank gauging.

Berth	*Marine diesel oil*		*Light and heavy bunker oils*	
No. 1	4″	80 t.p.h.*	6″	400/300 t.p.h.
No. 2	4″	40	6″	400/300
No. 3	4″	80*	10″	400/300

Note: *(a)* *Supply from a barge with 4″ rubber hose.

(b) In Winter time the rates for light and heavy bunker oils decrease due to the low sea-water temperature increasing the viscosity of these oils.

Bunkering for Cargo Vessels.

Bunker supply to cargo ships from a barge or a coastal tanker is available.

CUSTOMS: Upon arrival Master required submit to Customs a manifest of any cargo to be landed at Ras-al-Khafji and to sign a declaration that no intoxicating liquors or drugs will be landed. After loading completed, Customs will sign an Outward Manifest and issue Port Clearance. These will be handed to Master by Agent.

In normal circumstances Customs Officers do not board tankers, but board cargo ships and leave a Customs Guard on board throughout vessel's stay.

Import of following articles forbidden:

Alcoholic beverages.

Pornographic literature, photographs, pictures and films.

Explosives.

Firearms or implements of war of any kind.

Religious matters not pertaining to the Moslem faith.

Playing cards and other gambling devices.

REPAIRS: Some minor repairs may be made on board using shore assistance in case of extreme emergency, but such repairs must be made only with prior permission of Company's Terminal Office should it be required to do them in berth. Preferably all repairs should be carried out at anchorage. In all cases when shore assistance is required Master should notify ship's Agent well in advance.

DRY DOCKS: None.

REPATRIATION: May be accomplished by making special arrangement through the ship's Agent, well in advance of vessels arrival.

Marine Superintendent of Owners, or Owners Representatives and businessmen visiting Kuwait must have valid visas. Such visas can be obtained from Kuwait Government's diplomatic missions abroad.

AIRPORT: Crew joining must be routed through Dhahran. Kuwait Airport 110 km. Dammam 325 km.

TIME: GMT plus 3 hours throughout year.

TELEPHONES: No facilities for placing on board.

SERVICES: Swedish Welfare for Seamen, Lloyd's Surveyor, Butterworth Tank Cleaning Machines and Equipment and Underwater cleaning.

Provisions and deck stores are available from ship chandlers in Kuwait in limited kinds and quantities. Prices at Khafji may be a little more expensive than in Kuwait due to the transportation charges made. In all cases the ship's Agent should be advised of the requests at the earliest possible time before arrival.

SHORE LEAVE: Not normally permitted by Authorities except by arrangement through the ship's Agent.

AUTHORITY: Arabian Oil Company.

AGENT: See "Ras Tanura".

RAS AL MISHAB: 28.13 N. 48.43 E.

PILOTAGE: Compulsory. Await Pilot at Buoy No. 5.

APPROACHES: Do not use the old recommended track to Bandar Mishab shown on British Admiralty Chart No. 3774 and U.S. Hydrographic Chart 62422 unless corrected. Ships arriving should follow Ras al Khafji approach channel Buoy No. 1 (Lat. 28° 36′ N. and Long. 49° 10′ E.) and Buoy No. 2 (Lat. 28° 36′ N. and Long. 49° 00′ E.). From Light Buoy No. 2 proceed on a course of 253°(T) for approximately 5 miles and the following is the new approach channel to the anchorage and entrance channel of Ras al Mishab.

Buoy No. 1C – 28° 34.7′ N. 48° 55′ E. Characteristic – Quick Flashing White.

Buoy No. 2D – 28° 30.0′ N. 48° 49.0′ E. Characteristic – Flashing White 10 Sec.

Buoy No. 3F – 28° 25.0′ N. 48° 47.2′ E. Characteristic – Flashing White 15 Sec.

Buoy No. 4F – 28° 19.0′ N. 48° 45.2′ E. Characteristic – Flashing White 5 Sec.

Buoy No. 5G – 28° 13.0′ N. 48° 43.0′ Characteristic – Quick Flashing White.

Buoy No. 5 is designated the pilot station. Vessels should not proceed beyond this point without a Pilot.

ANCHORAGE: Anchorage area is between Buoy Nos. 4 and 5.

RESTRICTIONS: Daylight berthing and unberthing only.

VHF: Radio watch is maintained at Port Control Ras al Mishab on VHF radio Channel 16 from 0600 hrs. to 1700 hrs. daily Saturday throughout Thursday and for 12 hours prior to arrival of a vessel at Ras al Mishab.

After establishing communications on Channel 16, communications will normally be conducted on harbour frequency Channel 9.

BERTHING: The Sea Island at Ras al Mishab has 3 general cargo berths and 1 bulk cement berth which is equipped with an automated unloader and 4 pier mounted storage silos.

Depth of water alongside berths is 36 ft., (ISLW) Indian Spring Low Water. The inner harbour approach channel has been dredged to 36 ft. depth, and is 125 m. wide.

The Sea Island runs in a North-East by East direction from shore connected to the shore by a causeway 1.5 km. long. Berths are numbered as "North One" and "North Three" and "South Two" and "South Four" from shore to seaward. The berthing area on the North and South side of the Sea Island is 380 m. length overall.

The port cannot accommodate stern unloading for Ro/Ro vessels. Side unloading is available. The deck of the Sea Island berths is approximately 20 ft. above LW.

The port is currently a daylight port, working one 10-hour daylight shift per day. No night time navigation is allowed. All berthing will be accomplished in hours of daylight. Vessels will not be cleared by Saudi Arabian Customs for cargo operations if vessel is berthed after 1300 hrs. on Thursday or before 0900 hrs. on Saturday. Vessels scheduled to arrive at the port on or about the Saudi Arabian weekend – Thursday and Friday – should arrive at pilot station Buoy No. 5 not later than 1100 hrs. Thursdays and be ready for Pilot.

Commercial cargo for commercial consignees or importers is not allowable for discharge or transhipment through Ras al Mishab. Discharge at anchorage is not permitted.

FRESH WATER: Not available.

FUEL: Not available.

AGENT: See "Dammam".

RAS TANURA: 26.38 N. 50.10 E. (See Plan Book)

OPERATORS: Arabian American Oil Company ("Aramco").

FLAG: The Saudi Arabian flag must be flown from the vessel's foremast while in the Port of Ras Tanura. Masters should obtain this flag before arrival but, if circumstances render this impossible, a flag may be purchased from the vessel's Agent.

The Saudi Arabian flag is properly displayed when the Arabic writing appears on top and the Sword on the bottom.

DESCRIPTION OF TERMINAL: Ras Tanura Terminal, which consists of 2 piers, and 4 sea islands, has a total of 18 loading berths. Crude oil and product cargoes may be loaded in smaller tankers with drafts up to a max. of 33 ft. at the South Pier's 4 berths. At the North Pier, in addition to crude and products, RLPG is available and water depths at these 6 berths range from 40 to 49 ft. at ISLW. 4 Sea Islands, each consisting of 2 berths, are located approximately 5,600 ft. N.E. of the North Pier. The Sea Islands are inter connected with a walkway and are equipped with breasting and mooring dolphins. Water depth at the 8 Sea Island berths is 85 ft. at ISLW.

IMPORTANT FEATURES:

Ras Tanura Port:

1. Aramco harbour Pilots and Mooring Masters moor, unmoor and supervise the movement of all vessels in the vicinity of the piers, sea islands and buoy mooring berths. Normally, no charge is made for this service.

2. Safety rules are strictly enforced. Receipt of "Instructions to Vessels and Conditions of Use of Port" must be acknowledged before a vessel will be berthed. A thorough vessel inspection will be performed prior to loading to ensure conformity with safety requirements.

3. Aramco maintains a radio station (call letters HZY) for the exchange of messages with ships. All incoming tankers should establish early contact with this station, at least 72 hours before arrival, in order to exchange ETA data, traffic lists, weather advice, port closure advice, etc.

4. When a vessel is scheduled to load cargo at both the Ras Tanura Terminal and the Ju'aymah Terminal, Aramco reserves the right to advise the vessel at which berth the loading shall start and finish.

5. Display of quarantine signals on approach to Ras Tanura or Ju'aymah Terminal must be maintained until pratique has been granted. Ships cannot be berthed until the radio quarantine message has been received. The flag of Saudi Arabia must be flown both day and night throughout the vessel's stay in port.

6. To permit more rapid turnaround, an early departure procedure is available. This service provides for a quick departure of the vessel after loading, without the necessity of waiting for the delivery of documents at anchorage. This special service should be requested from the ship's Agent at the earliest opportunity.

7. The possession and/or consumption of alcoholic beverages is prohibited within the Kingdom of Saudi Arabia. All alcoholic beverages including beer, table wines and liquors are to be under lock and key during the vessel's stay. Vessels anchored at the anchorages or moored at the piers, sea islands or SPM's are considered to be in the Kingdom of Saudi Arabia. Local officials may carry out inspections to confirm that all alcoholic beverages are kept in locked ship's stores during the vessel's stay.

8. Saudi Arabia Government regulations prohibit the taking of photographs of *any* installation at the Port of Ras Tanura. Considerable delay to vessels may be incurred due to governmental investigations of violations of this regulation.

9. No medical facilities are available at the Ju'aymah and Ras Tanura Terminals. Requirements for medical assistance or hospital service should be addressed to the ship's Agent. The Aramco radio station HZY may be used at any time, without charge by vessels at sea, to obtain medical advice.

Ras Tanura Terminal:

1. The Ras Tanura Terminal facilities consist of 2 T-head piers and a Sea Island complex of 4 individual sea islands providing a total of 18 berths. In addition, a small single-berth pier used by small craft and coastal tankers is located on the West side of the Ras Tanura peninsula.

2. Vessels arriving at the Ras Tanura Terminal shall retain sufficient clean water ballast on board to permit safe handling of the vessel from the anchorage area to the berths in the prevailing weather conditions. Every effort should be made to reduce the quantity of ballast on board to a minimum and to have the ballast in as few tanks as practical in order to reduce time spent deballasting. Ballast pumping equipment should be ready to commence discharging ballast as soon as the vessel is secured in berth.

3. The "Deep Water Departure Channel" has a clear swept depth of 69 ft. at ISLW. A minimum 5 ft. keel clearance is required for all vessels transitting this channel during departure.

LOCATION: Aramco's crude and products shipping terminals at Ras Tanura and Ju'aymah comprise the Port of Ras Tanura, which is located on the Saudi Arabian coast of the Arabian Gulf. The *Ras Tanura Terminal and Refinery* are located on a 13 mile long peninsula known as Ras Tanura. On the sand spit at the Southern extremity of the Terminal are located the Company's piers, export tank farm and terminal offices.

There is a survey reference point located at the Southern tip of the peninsula, over which a beacon tower has been erected. The exact position of this beacon is:

Latitude: 26° 37′ 25″ North
Longitude: 50° 09′ 50″ East.

All bearings are referenced to this point, which is officially known as Ra's at Tannurah. The name "Ra's at Tannurah" (variously spelled) appears on most charts and publications.

The Ras Tanura Refinery and its storage tanks are located about 7 miles to the North.

The *Ju'aymah Terminal* tank farm is located on the coast approximately 20 miles to the North of the Ras Tanura Terminal. The metering and manifolding platform and the single point mooring berths are situated approximately 7 miles offshore.

The Port of Ras Tanura is a roadstead and there are only open anchorage areas for oil tankers and other vessels. Some protection is afforded by the land on the West and the shoals to the North, East and South. These shoals tend to keep the sea down to such an extent that vessels do not ordinarily register heavy movement.

An anchorage – "Northern Holding Anchorage" – has been established at approximately Lat. 27° 03′ N. and Long. 50° 15′ E. and is shown on U.S. D.M.A. No. 62415 and B.A. 3777. During periods of port congestion, arriving vessels may be requested via VHF radio to anchor in the holding anchorage. Vessels waiting in the holding anchorage shall continuously monitor VHF Channel 16 to receive instructions concerning berthing.

DOCUMENTS:

Arrival Documentation: The following documents are required for immediate inspection by the boarding Saudi Arabian Government officials:

(a) International Maritime Declaration of Health (1 copy from last loading to be surrendered).
(b) Valid deratisation or deratisation exemption certificate.
(c) Crew list.
(d) Passenger list.
(e) Smallpox vaccination certificates, of a date not exceeding 3 years, for all passengers and crew members.
(f) Certificates of inoculation against any communicable diseases prevailing at the ports of departure.
(g) A complete set of log books covering the period since the vessel's last call at Ras Tanura. In the case of a first visit, Saudi Arabian Government officials may require that log books cover the period from the date of the vessel's first sailing or from April 25th, 1952, whichever date is most recent.

Port Clearance and Cargo Documents: The port clearance documents consist of the following:

(a) **Permit of Departure:**
This form (in English) is filled out with information supplied by tankers in their quarantine radio message.
A port clearance application is filled out (in Arabic) with information from the Permit of Departure form.

(b) **Saudi Arabian Government Port Clearances:**
This official port clearance form (in Arabic) must be filled out with information provided by the Port Clearance Application.

Both the *Permit of Departure* and *Port Clearance* forms are to be aboard the tanker at the time of unmooring.

The cargo documents consist of the following:

(a) **Bill of Lading:**
This is an Aramco prepared document. The required information, except for the cargo quantity, will be filled prior to the arrival of the tanker and a copy will be given to the Master by the ship's Agent upon arrival of the ship. After the ship finishes loading, Shipping and Documentation Unit will radio the cargo quantities to the Master who will fill in these quantities on the Bill of Lading and will instruct his Agent to sign, on the Master's behalf, the original Bill of Lading.

(b) **Export Goods Manifest:**
This is a Saudi Arabian Government document required for

every ship which has loaded cargo in Saudi Arabia. The Master will receive from the ship's Agent the original export goods manifest forms covering each consignment of cargo loaded. It is imperative that the Master deliver these papers to the consignee upon arrival at the discharge port(s).

PILOTAGE: The channels of the Ras Tanura Separation Scheme are well marked by lighted, radar-reflecting beacons and buoys. Presently, for this reason, channel Pilots are not provided.

Pilotage is compulsory for all vessels calling at the Port of Ras Tanura to use the terminal facilities. Aramco Harbour Pilots moor, unmoor and supervise the movement of all vessels in the vicinity of the piers, subject to the conditions detailed in Appendix III, "Instructions to Vessels and Conditions of Use of Port", which see. Aramco Harbour Pilots are on duty continuously and at present their services are provided without charge although the Company reserves the right to charge for these services.

On departure from the Ras Tanura berths, Masters of VLCC vessels of 150,000 d.w.t. and above which have a draft of 60 ft. or more, may request additional pilotage assistance to line up to transit the "Deep Water Departure Channel". (Also see "Shipmaster's Report".) In such instances, the Harbour Pilot will remain on board until the vessel is aligned on a safe course with the departure channel, providing the Pilot can disembark safely. The additional pilotage is also available when it is necessary for a VLCC to proceed to anchor to await a favourable tide or make repairs. The Pilot will remain on board until the vessel arrives in the anchorage; however, the Master will be responsible for the actual anchoring of the vessel. During adverse sea and weather conditions, a proper lee shall be made so as to allow the Pilot to safely disembark. In order to permit the Harbour Pilot to safely embark and disembark from the vessel, a Pilot/accommodation ladder will be provided in accordance with the following requirements:

1. The ladder should be kept in good order and cleaned, and should be of adequate length and strength.
2. The vertical distance between steps should not exceed 15 in. The outboard edge of the step should project from 5 to 6 in. from the hull. Ladders must be so constructed that the steps will remain flat or at right angles to the hull while supporting the weight of a person.
3. Spreaders at suitable intervals should be provided to prevent the ladder twisting and the ladder should be properly secured with the steps level.
4. The deck in the vicinity of the ladder should be clean and free of oil and grease.
5. When possible, on vessels so equipped, the pilot ladder shall be made fast alongside of an area where there is a break in the rail or an opening in the bulwark. This allows a person to step directly on the deck and is considered most desirable. The boarding position should be as near midships as possible.
6. During the hours of darkness, it is necessary that the Pilot ladder be adequately lighted. It is emphasized that not only the ladder, but the deck area close by the head of the ladder should be illuminated.
7. A man rope or safety line should be rigged in the close proximity of the ladder.
8. Responsible deck department personnel are to be in attendance when the Pilot boards or leaves the ship.

Only double-drum, double-wire pilot hoists will be permitted on inspection and approval of Ras Tanura Pilots.

Aramco Harbour Pilots will pilot vessels to berth at all piers. All manoeuvring of vessels in the vicinity of or at the piers will be under the supervision of an Aramco Harbour Pilot.

Under normal operating conditions, no towboat or other craft is to come alongside any vessel before the Harbour Pilot boards the vessel. Should the Harbour Pilot deem the assistance of a tug to be necessary, he will then give the proper signal and secure same. Ship's personnel must not signal for tugs or boats to come alongside except as directed to do so by the Pilot.

Vessels will not be moored if they are not equipped with satisfactory mooring equipment, lines, gear, etc., or if they are not sufficiently ballasted. It is the responsibility of the Master to notify the Harbour Pilot of any special conditions, difficulties or peculiarities, such as engine or boiler deficiencies, defective navigational equipment, mooring lines, tackle, gear, or lack of necessary equipment, which might impose hazards in connection with the handling, mooring, unmooring, discharging or loading of the vessel.

Most vessels will be loaded using all-metal loading arms. The use of nylon or other highly elastic line is prohibited. Mooring lines should be checked frequently and kept tight to prevent excessive movement of the vessel in berth.

All vessels moored with automatic tension winches shall set the manual brakes on these winches.

The services of the Harbour Pilot and of the mooring tugs and their crews are provided without charge and upon the express understanding that they become the Agents and servants of the Owners and/or Charterers of the vessel in every respect. Aramco shall not be responsible and shall be held harmless from all liability for any damage whatsoever resulting from or caused by any action taken, order given or decision made (or any omission thereof) by the Pilot, or tug crew, or in any respect to the handling of such vessel. Damage or injury to any Aramco facility, equipment or personnel by any vessel calling at any loading terminal of the Port of Ras Tanura shall be the responsibility and liability of the Owners and/or Charterers of the vessel.

VHF radio contact may be made between ships and the Aramco Terminal Planning Office and Pilot's office at frequencies listed. See "VHF".

ANCHORAGES: The anchorages in the Port of Ras Tanura have been laid out to facilitate shipping and expedite ship movements to and from the Ras Tanura and Ju'aymah Terminals.

The *Northern Holding Anchorage* is located on the Northern side of the Ras Tanura Separation Scheme, due West of the Entry Buoy. This anchorage is intended as an initial holding area for incoming vessels which, because of berthing prospects or other reasons, will not be brought to berth on arrival. This recommended anchorage covers an area of approximately 30 square miles and varies in depth from 12 to 28 fathoms (22 to 51 m.). Holding ground is only fair, and it is recommended that anchored vessels lie to a long scope of chain whenever the weather is unfavourable.

The *Tanker Anchorage* at the Ras Tanura Terminal lies approximately 2 miles due East of the Sea Islands and Piers. This anchorage is used as a final holding area for vessels which have immediate berthing prospects or for vessels awaiting cargo clearance, documents etc., and whose draft does not exceed 60 ft. Vessels whose draft exceeds 60 ft. and which are required to anchor upon completion of loading, must normally do so in the area approximately 0.7 miles North of the Sea Islands. This anchorage area ranges in depth from 8 to 17 fathoms (14.6 to 31 m.) and holding ground is only considered fair due to variations in character of the bottom. It is recommended that anchored vessels lie to a long scope of chain during adverse weather.

INBOUND TRAFFIC PROCEDURES: All inbound vessels shall establish early radio contact with Aramco Ras Tanura via station HZY for the exchange of information, berthing prospects and arrival instructions. Arriving vessels which will be loading at the Ras Tanura Terminal shall proceed as follows:

(a) Vessels Proceeding to the Northern Holding Anchorage

The vessel shall make for a position approximately 2 miles North of the Ras Tanura Light Float position 27° 05.6′ N., 50° 57.5′ E. and then enter the inward channel of the Ras Tanura Separation Scheme. This will take the vessel past the Approach Buoy to the Entry Buoy. The vessel shall then proceed to the Northern Holding Anchorage and anchor. After anchoring, vessel shall immediately advise Aramco, via Radio HZY, of the following:

(i) Time of arrival at the Northern Holding Anchorage (in GMT).
(ii) Approximate position in the anchorage area.

Vessel shall then contact Aramco Terminal Planning Office and Ras Tanura Pilot Office by VHF radio, Channel 16, if vessel is equipped with VHF.

(b) Vessels Proceeding to Ras Tanura Terminal

The vessel shall make for a position approximately 2 miles North of the Ras Tanura Light Float position 27° 05.6′ N. 50° 57.5′ E. and then enter the inward channel of the Ras Tanura Separation Scheme. The vessel shall continue in the inward channel, past the approach buoy, entry buoy and all channel marker buoys to the Ras Tanura Terminal area, just South of Buoys No. 17 and 18, and proceed according to instructions from Aramco Terminal Planning and Ras Tanura Pilot Officer either to the Tanker Anchorage or to prepare for berthing.

HEALTH: *Radio pratique and quarantine:* A modified radio pratique procedure is in use at the Port of Ras Tanura. Port conditions permitting, vessels supplying requested quarantine information (see "Radio" – "50 Word Message") may be berthed on arrival and proceed with normal cargo loading operations prior to arrival on board of the Quarantine Officer. Extensive delay may be incurred by vessels failing to supply requested information promptly.

In accordance with international practice, quarantine signals must be displayed by all ships approaching Ras Tanura Port. These signals must be displayed continuously until pratique is granted. These signals are:

Sunrise to sunset – Quarantine flag
Sunset to sunrise – Signal lights – red over white

The Quarantine Officer may board vessels awaiting berth in the prescribed anchorage area; however, vessels proceeding directly to a berth will be boarded after being tied up.

Pier personnel are normally allowed on board prior to arrival of the Quarantine Officer.

Vessels at anchor awaiting berth should not rig an accommodation ladder, but instead should be prepared to provide, at short notice, an accommodation ladder rigged in conjunction with a pilot ladder. At night, adequate lighting must be provided.

RADIO: It is required that vessels contact "Aramco Ras Tanura" via HZY and provide a minimum of 3 notices of ETA information at about 72, 48 and 24 hours "steaming time" from the Northern Holding Anchorage. Shorter notices may result in delays and failure to give at least 24 hours notice will result in an addition to allowable lay-time in the event of a demurrage claim is filed against Aramco.

It is imperative that vessels departing under Early Departure Procedure monitor HZY and copy traffic lists after departure until cargo quantities are resolved and the Agent is authorised to approve documents.

The Arabian American Oil Company owns and operates a marine radio station whose call letters are HZY. Radio station HZY is maintained for the purpose of transacting Company business with "in-or-outbound vessels" and is open 24 hours daily. Station HZY will also accept and forward messages concerning ship's agency matters to Agents. However, agency messages to Masters are not permitted. There is no charge for either incoming or outgoing messages.

The marine transmitting antenna of HZY is located at:

Latitude – 26° 18′ 36″ North Longitude – 50° 07′ 12″ East

Due to its inland location Masters are strongly advised NOT to use this antenna for radio direction finding purposes since inaccurate bearings will be obtained due to coastal refraction.

All vessels must endeavour to keep HZY fully advised regarding estimated times of arrival at Ras Tanura, as well as times of actual arrival and position in the anchorage. It is required that vessels provide HZY with a minimum of three notices of ETA information, at about 72, 48 and 24 hours "steaming time" from Ras Tanura. Shorter notices may result in berthing delay. If loading part cargoes at other Arabian Gulf ports prevents a vessel from furnishing an accurate ETA, steps should be taken to dispatch a message either direct or through the ship's Agent giving the best estimate possible at the time. This message should then be followed by an accurate ETA immediately upon departure for Ras Tanura. Failure to give at least 24 hours notice will result in an addition to allowable laytime in the event a demurrage claim is filed against Aramco.

Upon first contact with all inbound tankers HZY will transmit the following two standard messages of 188 and 50 words:

188 word message

Master Rastanuraradio/HZY

Contact HZY soonest advising One ETA GMT Rastanura Two any later changes Three Agent's name and requirements Four arrival departure draft fore and aft Five arrival displacement tonnage Six deballasting hours Seven maximum loading rate full-stop Vessel urged to accept highest possible loading rate stop Vessels loading cargo advise previous cargo and if cargo or residue aboard to be commingled with Rastanura cargo fullstop If VHF aboard call Aramco pilot station for anchoring, boarding and berthing instructions when 100 miles out on 156.8 Channel 16 or 156.7 Channel 14 stop If no VHF aboard contact HZY 500 kHz and copy traffic lists on odd hours for berthing instructions stop On arrival anchorage advise HZY official readiness time and anchored position stop Radio messages without charge fullstop Pilots require sufficient clean ballast for manoeuvring with propellors almost covered and trim limited to 15 ft. for Ras Tanura terminal and 8 ft. for Juaymah terminal stop Imperative all ships operating under early departure procedure copy Aramco HZY traffic list after departure until cargo quantities are resolved and Agent is authorised to approve documents.

ARAMCO

50 word message

Master Rastanuraradio/HZY

Please advice any epidemic diseases or illness on-board and status of crews international certificates of immunisation and all ports called past thirty days also destination stop Agent stop Flag stop Net registered tonnage stop Vessel will not be allowed to berth until this information is received.

ARAMCO

It is important that the Master send a reply to the above two messages soonest after receipt.

Traffic list transmitting times and frequencies of HZY are as follows:

Transmits on 12811.3 kHz on even-hours GMT from 0600 to 1400 GMT, and on 8480 kHz on even-hours GMT from 1600 to 0400 GMT.

Listens on 12 mHz common Channels 5 and 6 or 8 mHz common Channels 5 and 6 after traffic list transmissions, until all calls have been cleared. HZY then maintains watch on 12 or 8 mHz common Channel 5 until the next scheduled traffic list.

Transmits on 16960 kHz at 1000 GMT and picks up calls in the 16 mHz band until all traffic is cleared.

Transmits on 430 kHz on all odd-hours GMT after call-up is made on 500 kHz. An alternate working frequency of 521 kHz may also be used during busy periods.

Ras Tanura local time is GMT plus 3 hours.

Weather advice, port closure information, hydrographic notices and traffic lists are "dualled" on 430 kHz and 8480 kHz at 0430 GMT and at 1630 GMT. It is requested that all vessels forward their local weather observations to this station, either in code or plain language, to assist in preparation of the Arabian Gulf forecasts.

There is no charge for incoming traffic or for weather observations from vessels.

Messages to ship's Agents are handled by HZY, free of charge, However, the shipping Agents are not permitted to use HZY for outgoing traffic. Address the message to Aramco and indicate the Agent's name as the first word of the text.

There is an aircraft radio beacon, call sign RT, which transmits on 335 kHz and is located at:

Latitude – 26° 37′ 36″ North
Longitude – 50° 09′ 47″ East

To facilitate contacting a vessel after departure, it is important that vessels copy HZY traffic lists for several days after leaving Ras Tanura.

There is a Saudi Arabian wireless station located in Dammam; however, this station does not handle marine traffic.

Radio Silence at Piers: The main wireless and radar equipment of any ship must not be operated while the vessel is alongside the oil piers. Use of VHF while alongside the oil piers to contact the Aramco Terminal Planning Office, Pilots, or Agents is permitted.

VHF: VHF radiotelephone Channel 10 for radar advisory service, and Channels 14 and 16 are available for ship-to-shore communication at Ras Tanura. Channels 14 and 16 are monitored 24-hours-a-day in the Aramco Terminal Planning Office which is located in Dhahran, approximately 25 miles South of Ras Tanura. Harbour Pilots can be contacted on Channels 14 and 16. VHF equipped vessels should try to contact the Aramco Terminal Planning Office when they are within 100 mile range of the port and while at anchor. Use of VHF while alongside the oil piers to contact the Aramco Terminal Planning Office, Pilots, or Agents is permitted.

RADAR: *Radar Surveillance Advisory System:*

A Radar Surveillance Advisory System is available to provide informational assistance and to monitor the movements of all ships calling at the Port of Ras Tanura. All ships entering the Ras Tanura Traffic Separation Scheme shall contact the Ras Tanura Pilot Office on VHF Channel 16 and maintain continuous VHF watch on Channel 10 during their entire stay in the Ras Tanura Port and anchorage areas.

In addition to identifying, tracking and monitoring ship movements to and from the Ras Tanura and Ju'aymah Terminal areas, the following services may be provided to vessel's Masters:

(a) Advise upon channel and port conditions, congestion, weather, tides, navigational aides, etc.
(b) Advise upon the movement of other vessels, dangerous manoeuvring situations, and vessels violating port regulations.
(c) Advise upon port regulations pertaining to movement of deep draft departing vessels and priority of vessel movements. (It may be necessary for incoming vessels to reduce speed to permit safe passage of outgoing deep draft vessels.)
(d) Advise upon berthing and anchoring conditions.

The Radar Surveillance Advisory System has been established in order to increase the safety of ships navigating in the Ras Tanura and Ju'aymah areas. However, it is an information and advisory service only, and in no way assumes control of responsibility for ships navigating in the area.

TUGS: Aramco operates five 4,000 h.p. tugs, bollard pull capacity of 55 tons each, and one 6,000 h.p. tug with bollard pull capacity of 70 tons. Two pilot boats and 3 or 4 Pilots are on duty at all times.

Mooring and unmooring assistance is provided by these tugs, regularly stationed in the immediate vicinity of the piers. At present no charge is made for these tugs when employed in normal mooring and unmooring operations, but a charge is made for additional or unusual services. These tugs are fitted with fire-pumps and water/foam monitors to assist in fighting fires.

When the assistance of the tugs is provided, the Master and crews of the tugs shall, in the performance of such services as they render to the vessel, become and be deemed to be the Agents and servants of the owners and/or Charterers of the vessel assisted, and Aramco shall not be responsible and shall be held harmless from all liability whatsoever for any damage that may be done by the tugs or their crews while assisting the vessels, whether occasioned by any act or omission of the tug Master or crew or by any defect or inadequacy of the tug, machinery or gear.

BERTHING: Tankers calling at Ras Tanura are assigned berths based on various factors including, but not limited to, the following: nomination date, time of arrival, product to be loaded, vessel size, available berths and loaded draft.

Whenever possible, endeavours are made to berth vessels immediately upon arrival, and to this end the Master should establish early contact with station HZY and maintain VHF radio contact with the Aramco Terminal Planning Office on the frequencies listed. (See "Radio and "VHF")

If there are no immediate berthing prospects, vessels will be directed to proceed to and anchor in the "Northern Holding Anchorage" and maintain radio contact with Station HZY or the Aramco Terminal Planning Office or the Ras Tanura Pilots' office by VHF radio.

If a berth is available, and the vessel's quarantine message and notice of arrival and readiness have been received by radio an Aramco Harbour Pilot will board the incoming vessel while it is underway. The point of boarding will be South of Buoys 17 and 18 and East of the Sea Island complex. The Harbour Pilot will direct the manoeuvring of the vessel to the assigned berth.

Gangways: All vessels are required to furnish their own gangway which should be made "ready" prior to berthing at the North or South Pier. At the Sea Islands, gangways are available at each berth.

Mooring Lines and Arrangements: In order to ensure the safety of personnel, tankers and loading facilities, and to prevent accidental oil spillages, Ras Tanura Port Authorities strongly recommend that tankers 75,000 d.w.t. and larger which moor at Aramco piers and sea islands utilise a minimum of 8 to 12 wire mooring lines (breast and springs) in accordance with the following schedule:

Vessel Size	*No. of Wires*
75 to 160 MDWT	8 Wire lines
161 to 250 MDWT	10 Wire lines
Greater than 250 MDWT	12 Wire lines

For vessels equipped with both wire and synthetic lines, mixing types must be avoided to the extent possible, thereby keeping the same type lines in the same service.

During periods of unsettled weather, arriving vessels fitted with sufficient wires are preferentially berthed whereas vessels equipped with synthetic lines or too few wire lines are held out in stream until the weather improves and it is safe to moor them. If a ship with synthetic lines is already moored and squall conditions arise, loading to that vessel will be stopped and the loading arms disconnected until weather conditions improve and it is judged safe to resume the loading operation. The use of nylon or other highly elastic line is prohibited.

At the piers, vessels must be moored to the entire satisfaction of the Harbour Pilot. When, in the Harbour Pilot's judgement, additional mooring lines are required and are not available on the vessel, such lines will be furnished by Aramco on a loan basis. Vessels must be ready at all times to put out more lines as requested by the pier personnel, or as indicated by weather changes. All vessels moored at the piers must have deck winches in readiness for immediate use. All vessels moored with automatic tension winches shall set the manual brakes on these winches.

Loading Arm Hook-up: Pier crews are on duty continuously to handle oil hoses/arms and mooring lines. Mooring lines on board vessels will not be handled by Aramco personnel.

All loading connections are equipped with electrical insulating flanges. Therefore ship to shore bonding cables are not required.

OIL LOADING PIERS AND SEA ISLANDS: There are 2 "T" head piers that accommodate oil tankers. These piers project from the Eastern face of the Ras Tanura peninsula and are commonly referred to as the South Pier and the North Pier.

South Pier: The South Pier is connected to the peninsula by a causeway and trestle, 2,300 ft. in length. This pier has 4 berths and is 1,200 ft. long and 105 ft. wide.

Depths at the South Pier are as follows:

Berth 1	33 ft. at ISLW
Berth 2	33 ft. at ISLW
Berth 3	32 ft. at ISLW
Berth 4	31 ft. at ISLW

North Pier: The North Pier is located about 0.75 miles to the North of the South Pier, and has a causeway and trestle that extends some 3,600 ft. from the peninsula. This pier is 2,645 ft. long and 110 ft. wide, and comprises 6 berths.

Depths at the North Pier are as follows:

Berth 6	46 ft. at ISLW
Berth 7	40 ft. at ISLW
Berth 8	49 ft. at ISLW
Berth 9	42 ft. at ISLW
Berth 10	49 ft. at ISLW
Berth 11	48 ft. at ISLW

Sea Islands: A complex of 4 sea islands interconnected by walkways is located approximately 5,600 ft. N.E. of the North Pier. Each of the 4 sea islands consists of 2 berths with a loading station on the platform and water depth at each berth is 85 ft. at ISLW.

Each of Sea Islands 1, 2 and 3 consists of 2 berths, 4 mooring dolphins, and a platform with a loading station and 4 bresting dolphins per berth. Sea Island 4 consist of 2 berths, 6 mooring dolphins, and a platform with a loading station and 2 breasting dolphins per berth. The length of the berths between outer mooring dolphins at Sea Island 1 (Berths 12 and 14) is 1,250 ft., at Sea Island 2 (Berths 15 and 16) and Sea Island 3 (Berths 17 and 18) is 1,400 ft. and at Sea Island 4 (Berths 19 and 20) is 1,750 ft.

The Sea Island loading facilities are serviced by 8 submarine loading lines which have a combined maximum rated capacity of 668,000 b.p.h. one bunker fuel oil line with a rated capacity of 12,000 b.p.h. and 1 black diesel bunker oil line with a rated capacity of 900 b.p.h.

The loading stations at each of the Sea Island berths are equipped with steel, hydraulically-operated loading arms as follows:

		Crude Arms		*Bunker Arms*	
Sea Island	*Berths*	*No.*	*Size*	*No.*	*Size*
1	12 & 14	3	16 in.	1	10 in.
2	15 & 16	4	16 in.	2	10 in.
3	17 & 18	4	16 in.	2	10 in.
4	19 & 20	4	24 in.	2	16 in.

All Sea Island berths are equipped with quick release hooks.

Vessel traffic in the vicinity of the Sea Island must pass to the East of the Sea Islands.

Refrigerated LPG Loading: Facilities for loading refrigerated LPG are located at the North Pier, Berths 6, 8 and 10. These facilities are not designed for loading pressurised cargoes and no LPG will be loaded onto a tanker which does not have adequate shipboard refrigeration capacity and chilled tanks. Ships arriving for refrigerated LPG cargo must have their tank bottoms cooled to minus 38°F. maximum for A-140 Propane loading, and plus 32°F. maximum for A-160 Butane loading. Tank top temperatures must be within 20 – 25°F. Of the bottom temperaturre and pressure must not exceed 1.0 p.s.i.g. Appendix V (which see), entitled "Special Regulations for Loading Refrigerated LPG (RLPG) at Ras Tanura", provides detailed information on requirements and procedures for loading LPG at Ras Tanura.

LPG is loaded through 12 in. loading arms at a maximum rate of 30,000 b.p.h. for Butane and 30,000 b.p.h. for Propane.

Safe Loading Depths: The diurnal tidal rise is approximately 8 ft. at Spring and 5 ft. at neaps. If at any time a ship's draft approaches to within about 3 ft. of the depth of water at the berth, loading will be suspended until an incoming tide increases the depth to permit resumption of loading and provide for safe draft of the fully loaded ship on departure.

The deep water departure channel has a clear swept depth of 69 ft. at ISLW.

A minimum 5 ft keel clearance on all vessels shall be kept when transitting this channel. This is an exercise of prudent judgement and seamanship that minimises the probabilities of groundings.

Loading Rates: The following table shows the products available at each berth and nominal loading rates:

Cargo	*Available at Berths*	*Barrels per Hour*
Crude Oil	12, 14, 15, 16, 17, 18, 19, 20	40,000 to 280,000
Crude Oil	6, 7, 8, 9, 10, 11	15,000 to 90,000
Crude Oil	1, 2, 3, 4	12,000
Fuel Oil	6, 7, 8, 9, 10, 11	12,000 to 22,000
Fuel Oil	1, 2, 3, 4	12,000 to 22,000
Black Diesel	1, 2, 3, 4	5,000
White Diesel	8, 9, 10	12,000
White Diesel	1, 2, 3, 4	8,500 to 15,000
Gasoline	1, 2, 3, 4	6,000
Kerosene (See Note)	1, 2, 3, 4, 8, 9, 10	6,500
Jet Fuel (See Note)	1, 2, 3, 4	10,000
Bunker Fuel Oil	1, 2, 3, 4	5,000
Bunker Fuel Oil	6, 7, 8, 9, 10, 11	5,000
Bunker Fuel Oil	12, 14, 15, 16, 17, 18, 19, 20	12,000
Bunker Diesel	1, 2, 3, 4	1,400
Bunker Diesel	6, 7, 8, 9, 10, 11	1,200
Bunker Diesel	12, 14, 15, 16, 17, 18, 19, 20	900
Refrigerated LPG	6, 8, 10	8,000 to 30,000
Naphtha	6, 7, 8, 9, 10	30,000

Note: See "Safety" — Precautions against static ignition.

Products can be loaded simultaneously at the respective berths if shown above as being available.

It is expected that most ships will be able to receive any cargo, except crude oil, as fast as it can be delivered. Officers in charge of loading must have due regard for all safety precautions as well as for individual ship hazards. If loading of crude oil or products is too slow, Aramco will so advise the vessel. Should a demurrage claim be filed against Aramco the slow loading may result in an addition to allowed lay time.

To prevent ignitions by static electricity the loading rates for kerosene, jet fuel and similar white products will be reduced.

Manifold Loading Connections: Cargo loading arms at the North Pier have 12 in. and 16 in. standard 150 lbs. ANSI raised face flanges.

The refrigerated LPG loading arms at North Pier Berths 6, 8 and 10 have 8 in. and 12 in. standard 150 lb. ANSI raised face flanges.

Cargo loading arms at the Sea Islands have 16 in. and 24 in. standard 150 lb. ANSI flanges.

Cargo loading hoses at the South Pier have 8 in. standard 150 lb. ANSI raised face flanges.

All vessels calling at Ras Tanura terminal should be equipped with reducing spools to fit these loading connections. These fittings should be in place prior to berthing to help expedite ship turnaround time.

Responsibility: All operations in connection with the starting of loading, discharging, switching of tanks and topping off must be directly and personally supervised by the ship's officer.

Upon completion of loading, the vessel will normally be required to leave the berth immediately after disconnecting hoses/arms to await clearance in the Tanker anchorage.

It is the responsibility of the vessel to advise the pier operators to shut down bunker delivery when the requirements of the vessel have been filled.

Emergency Procedures: The course of action to be followed by Aramco terminal personnel in the event of a fire or explosion on board a vessel while berthed alongside at this terminal will be dictated by the particular facts and circumstances of the incident. Although it is impossible to indicate exactly what practices will be applied during an emergency before an evaluation of the specific situation can be made by the responsible Terminal representative, his decisions will be based on the following principles:

(1) An evaluation of the particular emergency will be made by the responsible terminal representative to determine the course of action to be taken. His decision as to the course of action will take into account the location, type and extent of fire or explosion, the berth location and proximity of other vessels, and the tidal and wind conditions.

(2) A burning vessel will not be permitted to remain alongside the berth. Where possible, the fire will be fought with available berth fire-fighting facilities until the arrival of tugs. After hook-up of the tugs to the vessel's fire wires, if the fire is not controllable or extinguished, the vessel will be released or cut free ano removed from berth under controlled conditions.

(3) Where communication facilities permit, the Master or responsible ship's officer, will be advised prior to releasing or cutting free a vessel from the berth. The Master should designate a responsible senior ship's officer with whom the senior terminal representative present can communicate in case of a fire or explosion aboard the vessel. Where possible, this officer will be advised of the actions to be taken in releasing or cutting the vessel free from the jetty.

(4) Although a vessel may have no power it may be released or cut free from the berth prior to arrival of the tugs and hook up to the vessel's fire wires, if in the opinion of the senior terminal representative present it is a greater hazard at the berth than drifting free. Normally, however, a burning vessel will be removed by tug boats under controlled conditions.

Note: The above mentioned Principles are intended to provide the guidelines of action to protect personnel and facilities, and other vessels at the Aramco loading piers.

EARLY DEPARTURE PROCEDURE: To permit more rapid ship turnaround an *Early Departure Procedure* is available. This service provides for a quick departure of the vessel after loading, without the necessity of waiting for delivery of documents at anchorage. This special service should be requested and arranged for with the Agent at the ship's earliest opportunity.

When the vessel is ready to leave the port, a Ministry of Health permit and required port clearance documents will be given to the Master by the ship's Agent.

BALLAST: Vessels should arrive at Ras Tanura with minimum clean ballast to enable manoeuvring under prevailing weather conditions.

Masters are encouraged to take advantage of the favourable weather which prevails much of the time, particularly during the Summer and fall months, to minimise ballast in order to reduce vessel turnaround time. Masters should maintain radio contact with HZY or ship-to-shore communication by voice radio in order to obtain latest weather information and advice on appropriate ballast.

Aramco is particularly interested in having vessels complete the deballasting operation promptly after berthing in order to minimise time at berth. Simultaneous loading and deballasting is encouraged on properly equipped vessels. Owners/operators or charterers of vessels requiring time to deballast in excess of what Aramco considers standard will be so notified by letter with a copy to the Master.

POLLUTION: Discharge into the sea of oil or oil base products either alone or in combination with ballast water is not allowed. Since the terminal does not have facilities to receive any significant amount of oil residues or oily ballast water, tankers arriving alongside with such materials on board will be sent to anchorage to await further orders unless the vessel has prior clearance to load on top of such material or unless the ship's Master agrees to segregate such materials in a separate tank. Ships which release oil or oil residues including oily ballast water in either berth or anchorage area will be held responsible for all clean-up costs. The ship's Master shall be expected to acknowledge by his signature receipt of a Pollution Letter of Protest, informing him that a pollution incident attributable to his ship has occurred and that clean-up cost will be billed to the ship Owners.

All incidents of oil discharge into the sea are investigated and documented and these reports are provided to the Saudi Arabian Government officials in accordance with their requirements.

MEDICAL: No medical services are available at the Ras Tanura or Ju'aymah terminals. Requirements for medical assistance or hospital service must be addressed to the ship's Agent.

When necessary, the Master may obtain medical attention for the ship's personnel from the port doctor (quarantine officer), who may, in the case of serious illness or injury, recommend treatment at the Dammam Government Hospital, government or private clinics in Rahima, or the Ash-Sharq Hospital in Al-Khobar. The port doctor ordinarily will treat minor illnesses or injuries on board ship. A charge is made for medical attention or supplies furnished by the port doctor or other private sources.

The medical facilities of Aramco are made available in emergencies only when referral is warranted medically. A charge is made for medical attention or supplies furnished by the Company. The Aramco radio station, HZY, may be used without charge by vessels at sea to obtain medical advice at any time.

FRESH WATER: Both natural well water and drinking water are available but *only* at the North and South Piers, Berths 1 to 11.

Natural well water is quite brackish and is used mainly for washing. Well water can be supplied at a rate of 50 t.p.h., up to a limit of 100 tons and at a cost of approximately U.S. $1.20 per ton.

The drinking water is treated by a membrane process and meets all the requirements of the U.S. Health Standards. However, due to the significant amounts of calcium, magnesium, carbonates, sulphates and silica, it is *not recommended* as feed to marine boilers. Drinking water is available at a rate of 20 t.p.h., up to a limit of 25 tons per vessel, at a cost of approximately U.S. $12.00 per ton.

FUEL: Bunkering facilities are operated by Aramco, and fuel bunkers are available at all berths at the Ras Tanura Terminal and Ju'aymah Terminal. Vessels are expected to provide adequate advance notice of bunker requirements in order to avoid possible delays.

Vessels taking only bunkers are urged to call at Ras Tanura *prior* to loading cargo elsewhere to avoid delays caused by draft and berth assignment problems.

Masters employing the services of the various bunkering services from the port of Dammam are not permitted to bunker their vessels within the operating area of the port of Ras Tanura.

Lubricating Oils: Lubricating oils are available in limited drum quantities if ordered in advance through the ship's Agent.

SURVEYORS: Independent oil inspection service is available at Ras Tanura by the following agencies:

(a) B & R Redwood, Orchard Sea, Winkfield, Nr. Windsor, Berks., England.
(b) Charles Martin, Inspectors of Petroleum, Inc., 61 Broadway, New York, New York 10006, U.S.A.
(c) E. W. Saybolt and Co., S.A., 400 Swenson Drive, Kenilworth, New Jersey 07033, U.S.A.
(d) G. Watson Grey, Harrisons Wharf, London Road, Purfleet, Essex, England.

The American Bureau of Shipping, Norske Veritas, and Lloyds of London maintain a marine surveyor at Manama on Bahrain Island.

REPAIRS: Relatively limited repair service is available from local business concerns. Aramco will assist in making emergency repairs on vessels only if approved by the Aramco Marine Department Manager and Port Captain. It is suggested that the Master discuss repair charges with the ship's Agent prior to authorizing or requesting any repair work.

TIME: Local time is based on the 45th meridian (3 hours East of Greenwich). In order to avoid any confusion, all communications references to time should be quoted in GMT.

AIRPORT: Ras Tanura terminal about 50 miles from Dhahran Airport. This airport is serviced by many international airlines.

REPATRIATION/SHORE LEAVE: All matters pertaining to crew changes, repatriation of crew personnel, or shore leave are to be arranged through the ship's Agent.

There is no Seamen's Recreation Centre at either terminal of the port of Ras Tanura.

DEVELOPMENTS: See "Ju'aymah".

SAFETY: *Tanker Loading Safety Regulations:* The port of Ras Tanura maintains a vigorous tanker loading safety programme. Aramco is a member of the Oil Companies International Marine Forum (O.C.I.M.F.) and as such follows the procedures and safety practices recommended by this International organization.

As is done in other Arabian Gulf ports, each ship's Master is presented with a form entitled "Declaration by Master" which lists the Aramco Safety Regulations. After a detailed review of each safety item with the pier safety representative, the Master must sign this form. Prior to start of loading and later at several times during the loading, the pier safety representative accompanied by one of the ship's officers will visit the vessel and check to ensure that safe loading practices are being observed by both the ship and the shore crews.

The following list of safety items contains the safety regulations and requirements of the port of Ras Tanura:

Smoking Regulations: No Smoking will be allowed on board while the vessel is at the berth except in places in the accommodation aft, which have been jointly approved in writing by the Master and the Representative of the terminal superintendent.

Galley Fires: No galley fires will be used unless permission has been obtained in writing, from a representative of the terminal superintendent.

Naked Lights: Only vapour-proof/explosion-proof electric lights will be used on deck during the loading.

Electric Cables: Portable electrical equipment on deck will be disconnected.

Radio/Radar Transmitters: Radar and radio transmitting aerials will be switched off and grounded. If servicing of radar and radio units is required when at berth concurrence of the terminal representative will be obtained.

Hand Torches: Hand torches will be of an approved type certified to be safe in hazardous locations.

Portable Radio Transceivers: Portable radio transceivers will not be permitted on deck while loading without a certificate from a recognised authority certifying that the radio is intrinsically safe.

Doors and Ports Amidship Accommodation: All external doors and ports in the amidships accommodation will be kept closed during loading and every effort will be made to prevent entry of gas into this accommodation.

Doors and Ports After Accommodation:

(a) All doors, ports and openings in the aft accommodation that overlook the cargo loading deck will be kept closed.
(b) Portholes and doors downwind of loading deck which might take in gas will be closed. If requested by terminal representative such other action as is necessary will be taken to ensure that no hydrocarbon vapour shall enter a normally non-hazardous area of the vessel where ignition sources could exist.

Ventilators: Ventilators will be kept suitably trimmed at all times with regard to tank vents and prevailing wind conditions to prevent entry of flammable vapours.

Central Air Conditioning Intakes: Any central air-conditioning or fresh air intakes which might take in gas will be closed. All intakes within a combined total of 100 ft. vertically and horizontally of cargo tank openings and/or venting points will be closed.

Window Type Air Conditioning Units: All window type air conditioning units will be kept disconnected when loading low flash oils.

Mooring Lines: Mooring lines must be tended to keep vessel in position and lines taut at all times. Tension winches will be on manual brake.

Cargo/Bunker Hoses: The Master will inspect and ensure to his satisfaction that cargo loading hoses or arms are in good condition.

Loading Connections: The Master will ensure that the oil loading line connections between the shore and ship will be inspected and will be made to his satisfaction.

Unused Cargo Connections: Unused cargo and bunker connections will be blanked and fully bolted.

Stern Discharge Line: The stern discharge line, if any, will be blanked and fully bolted, forward of the after accommodation if possible.

Sea Valves: All ship's sea and overboard discharge valves will be blank flanged or sealed closed.

Scuppers: Scuppers will be plugged and cemented, and plugs will not be removed until loading is completed.

Ship/Shore: A responsible member of the crew will be stationed on the loading deck and will maintain communications or remain in visual contact with the shore operator during loading. He will advise the operator when changes in loading rates are required. VHF radios are placed aboard ship at the loading manifold at North Pier and Sea Island berths.

Cargo Tank Lids:
(a) Before berthing all tank tops, ullage plugs, and sighting ports will be closed and dogged down unless vessel is certified by the Master to be gas-free and all ballast is clean.
(b) Cargo and bunker tank lids will be kept closed but not dogged down throughout the period of loading. This also applies to permanent ballast tanks.

Gas Venting:
(a) Agreement on Method of Venting: Unless specified otherwise on the "Agreement on Method of Venting" signed jointly by the Master and the Representative of the terminal superintendent, all ullage or sighting ports will be kept completely closed (not secured) throughout the loading except for intermittent periods for the purpose of ullaging or sighting ship's tanks.
(b) Flame Arrestors:
Whether open or closed, all ullage ports will be protected by clean, well-fitted flame arrestors of wire gauze screens of an approved type with no defects.

Fire Fighting Equipment: Fire and emergency equipment will be kept in readiness at all times while at berth. Ship's fire hose will be uncoiled and laid out, one forward and one aft, unless fire monitors can be substituted for this requirement.

Emergency Towing: Towing wire (fire wires) for emergency use will be lowered to the water's edge from the offshore bow and quarter bitts and will be tended to keep the eye above the water's edge during loading.

Engines: Engines will be kept ready and vessel kept trimmed so it can leave the piers under short notice.

Ballast: The water ballast which is to be discharged must be clean ballast as defined by current IMCO conventions, free from oil and other hydrocarbons which might pollute the local water of this port.

Gas Freeing: No gas freeing or tank washing will be done at berth.

Restrictions on Tankership Shutoff: Many new tankers are equipped with motor operated valves, some of which are operated from a central location. It is imperative that these devices never be operated to close off against full crude oil delivery rates unless the valve closure action takes at least 60 seconds. Closure times less than 60 seconds may result in surge and hammer of sufficient force to rupture the loading arm. This restriction does not apply to normal topping operations at reduced rates.

Gangways: Gangways will be tended and kept safely rigged as loading progresses.

Repairs: No repair or maintenance work of any kind involving the risk of sparks or other means of ignition shall be undertaken while at berth without written permission from a representative of the terminal superintendent.

Boiler Tube Cleaning: Boiler tubes must not be cleaned while the vessel is at berth, and every precaution must be taken so that sparks do not escape from the funnel.

Emergency Signal: In the event of fire or other emergency, the ship will sound a series of 10 short blasts on the vessel's whistle.

Suspension of Loading: Aramco's terminal personnel are authorized to suspend oil handling operations in the event any of the foregoing safety rules are not observed, or if any other danger is believed to exist, by Aramco personnel supervising loading operations. Tankers are expected to follow all safety regulations generally accepted and practised in the marine transport industry.

The Master has the right to shut down loading in the event that he feels shore operations are unsafe provided adequate advance notice is given to pier personnel.

Precautions Against Static Ignition: Tanks must be gas-free within 0.4 of the lower flammable limit before loading kerosene, kerosene-type jet fuel, and white diesel. Crude oil and all other products except RLPG may be loaded into tanks which are either gas-free or non-gas-free. Ships' tanks and lines must be free of water. Splash filling is prohibited. Loading rates for kerosene and kerosene-type jet fuel will be reduced as follows:
(a) Loading is commenced at a rate not to exceed 1,000 bbls.p.h. per cargo tank, until the liquid in each tank has reached a level of 20 ft.
(b) Above the liquid level of 20 ft., the loading rate is limited to 1,500 bbbls.p.h. per cargo tank, maximum.

No ullage gauges, temperature readings or samples shall be taken until at least 30 minutes after loading has been stopped to that tank to allow static charges to dissipate. No loose floating objects are permitted in tanks to be loaded. Automatic tank gauges and non-conductive ullage sticks may be used at any time.

Under certain conditions, the above restrictions will also apply to loading of heavy naphtha and gasoline-type jet fuel (JP-4).

Hydrogen Sulphide Hazards: Aramco crudes may contain dissolved hydrogen sulphide (H_2S) in concentrations which would cause the gases vented during tanker loading to be hazardous if inhaled. We recommend that Masters review the instructions issued by the Owners/charterers about hydrogen sulfide hazards. If the loading of H_2S bearing crude oil is not covered by such instructions, Aramco has available, upon request, a list of recommendations to aid the Masters.

Action in Case of Oil Spills: In the event of an oil spill the vessel will notify the terminal operator on duty at the berth.

Penalty for Failure to Comply: Disregard of, or failure to fully comply with any of the Safety Regulations will result in stopping all loading operations and the vessel being ordered off the berth for appropriate action to be taken by the charterers and owners concerned.

APPENDICES:
Appendix III

Arabian American Oil Company
INSTRUCTIONS TO VESSELS AND CONDITIONS OF USE OF PORT
Ras Tanura, Saudi Arabia

Date:................. Time:...............GMT

THE MASTER S/S – M/V

Please have your vessel ready for berthing by Aramco Harbour Pilot at .... hours Greenwich Mean Time..............(Date).

1. Vessel will be moored to Berth No. ...... North/South Pier/Sea Island Port/Starboard side to the Wharf as shown on attached diagram.
2. The berth is presently occupied/unoccupied.
3. If a delay occurs, please maintain an alert watch and keep vessel in readiness to move as quickly as Pilot comes aboard.
4. Local Time is GMT plus ....hours.
5. Low Water will be at approximately .... Hours GMT and will be approximately ....feet above ISLW as indicated in U.S. Coast & Geodetic Tide Tables.
6. To avoid delay, please maintain minimum ballast for safe manoeuvring in prevailing weather.
7. Ballast water being discharged while in port MUST BE FREE OF OIL.
8. Immediately following completion of berthing and granting of pratique, an Aramco inspector will board your vessel with Form Aramco 3032-1 Declaration by Master and physically inspect the vessel for conformity to safety requirements and check off certain items required.

MOORING AND MANOEUVRING

1. Full Power must be available for manoeuvring to and from wharves.
2. An Aramco Pilot will pilot vessel to berth assigned.
3. All manoeuvring in vicinity of, or at piers, will be under supervision of an Aramco Pilot.
4. Aramco tugs will assist in mooring and unmooring.
5. All tank tops, ullage plugs and sighting ports will be closed before berthing.
6. Vessel's Master must notify the Pilot of any special conditions, difficulties or peculiarities such as defective equipment, lines or gear which might impose special hazards in connection with handling, mooring or loading of vessels.
7. Steering gear, engine room telegraph, whistle and all navigational equipment must be tested before any manoeuvring to or from piers is started.
8. Pilot will decline to moor vessel with unsatisfactory equipment, lines, gear, etc.
9. Aramco will loan additional mooring lines if Pilot deems them necessary.
10. Vessels must be moored to entire satisfaction of Pilot.
11. Vessels must be ready to put out more lines as required by weather changes or at request of Pilot or oil loading personnel.
12. Winches must be ready at all times for immediate use.
13. Except in emergency, no mooring lines will be let go without permission of the Pilot.
14. While alongside wharves, maintain engines and propulsive machinery ready at all times to leave wharf on short notice under full power.
15. No repairs are permitted that will delay or interfere with this manoeuvring.
16. Non-compliance with 13 and 14 constitutes a serious safety hazard. Any towage and delay resulting from non-compliance will be for vessel's account.
17. If fire or other grave emergency occurs or danger appears imminent on either the vessel or pier, do not await arrival of Pilot — immediately let go mooring lines and personally remove vessel from pier in such manner as to best avoid damage to pier of other vessels.
18. Upon completion of loading and/or bunkering and immediately after disconnection of hoses, vessel must leave berth and await clearance in stream.

SAUDI ARABIAN GOVERNMENT PORT REGULATIONS

1. Quarantine signals must be displayed upon entering the coastal waters of Saudi Arabia and approaching Ras Tanura, in accordance with international practice, and shall be continuously displayed until pratique is granted. These signals shall be as follows:
   Sunrise to Sunset — Quarantine Flag.
   Sunset to Sunrise — Quarantine Signal Lights (Red over White)
2. The Saudi Arabian flag must be flown from the foremast while your vessel is in the coastal waters of Saudi Arabia. Such flags are available for loan and may be obtained from the vessel's Agent.
3. Importation of liquor or contraband items, or trafficking in such items between vessels, is absolutely prohibited.
4. Ship's personnel are *NOT* permitted ashore nor on the wharves *FOR ANY PURPOSE WHATSOEVER* (this includes the reading of the ship's draft) until pratique is granted and then are allowed on the wharves only if actually engaged in duties in connection with operations of discharging ballast, or loading.
5. All shore leave is contingent upon compliance with Saudi Arabian Quarantine and Passport Regulations. For current details concerning these regulations and shore leave

restrictions, ship's Agents must be consulted. Failure to comply with 4 and 5 may result in severe penalties.

CONDITIONS OF USE OF PORT

1. The Master of the vessel shall remain solely responsible for the safety and the proper operation of the vessel at all times. Neither Aramco nor its personnel shall be responsible for any loss or damage arising in consequence of any assistance, instructions or advice given or tendered in respect of the vessel.
2. The use of Aramco premises, facilities and equipment is subject to the express understanding and condition that Aramco and its personnel shall be held harmless from all liability, loss or claim thereof arising out of such use.
3. All vessels transitting the "DEEP WATER DEPARTURE CHANNEL" must maintain a minimum 5 ft. keel clearance.
4. The Harbour Pilot is supplied upon the condition that when boarding or assisting the vessel he becomes the Agent and servant of the Owner and/or Charterers of the vessel in every respect. Aramco shall not be responsible and shall be held harmless from all liability for any damage resulting from or caused by any action taken, order given, or decision made (or any omission thereof) by the Harbour Pilot or in respect to his handling of such vessel.
5. When the assistance of tugs is provided, the Master and crews of the tugs shall, in the performance of such services as they render to the vessel, become and be deemed to be the Agents and servants of the Owners and/or Charterers of the vessel assisted, and Aramco shall not be responsible and shall be held harmless from all liability for any damage that may be done by the tugs or their crews while assisting the vessel, whether occasioned by any act or omission of the tug Master or crew or by any defect or inadequacy of the tug, its machinery or gear.
6. Pilots will not moor any vessel to Aramco wharves unless they have the Masters signature on acknowledgment below.

MASTER'S ACKNOWLEDGMENT

I hereby acknowledge receipt of a copy of this document and agree to the instructions and conditions set forth therein.

....
Date Master

....GMT ....
Hour Vessel

Appendix V

SPECIAL REGULATIONS FOR LOADING REFRIGERATED LPG (RLPG) AT RAS TANURA

MASTER

Refrigerated LPG is loaded at Ras Tanura (North Pier) berths Nos. 6, 8 and 10. The water depth at ISLW in all 3 berths is 46, 49 and 49 ft. respectively.

RLPG is loaded via 12 in LPG loading arms. The maximum loading rate for butane is 30,000 b.p.h.; and for propane 30,000 b.p.h. Each berth is equipped with 4 LPG loading arms which may be used for butane liquid, propane liquid or vapour return. The LPG loading arms at berth No. 10 are fitted with Quick Connect/Disconnect Couplers (QCDC). Each LPG loading line has an associated pier circulation and vapour return line. Loading lines must be on circulation at least 4 hours prior to LPG ship start up. No 2 ships are loaded from 1 loading line simultaneously. Vapour line *must* be connected to the vessel before loading commences. This also includes those loading coolant.

Butane and propane may be sub-cooled at Plant 59 by means of Freon-Chillers.

The following specific regulations will be followed for every LPG vessel loading at North Pier:

1. Prior to starting any RLPG cargo loading, the NGL Shift Coordinator shall confer with the vessel's Master and/or Responsible Loading Officer to determine the following:
   1.1 Quantity and type of product in each ship tank and whether it is part cargo or residue required for cooling.
   1.2 Temperatures and pressure of each ship tank.
   1.3 Product to be loaded in each ship tank.
   1.4 Residue in the ship tanks will be measured by the Independent Inspector assigned to the ship and witnessed by an Aramco Inspector or NGL shift co-ordinator.
2. Facilities at Ras Tanura *are not* designed for loading pressure LPG and *no* LPG will be loaded into ships' tanks that are not equipped with refrigeration facilities and are not adequately chilled.
   2.1 Ship tank bottoms must be cooled to minus 38° F. maximum for A-140 propane loading and plus 32° F. maximum for A-160 butane loading. Top temperatures should be within 20-25° F. of the bottom temperature.
   2.2 Tank pressure is not to exceed 1.0 p.s.i.g. or 0.07 kg/cm^2.
3. Butane may be loaded into ship tanks containing butane residues up to 10% of the cargo to be loaded.
4. Propane may be loaded into ship tanks containing propane residues up to 10% of the cargo to be loaded.
5. Propane may be loaded into ship tanks containing part cargo of the same grade only by authorization of the off-taker. This authorization shall be obtained through Manufacturing and Oil Supply Department of Aramco Services Company. Quantities of over 10% of the cargo to be loaded shall be considered part cargo.
   5.1 Part cargo on board at the time of the ship arrival must be measured by the Independent Inspector and witnessed by an Aramco Inspector or NGL Shift Co-ordinator regardless of whether Aramco cargo is to be loaded on top or not.
   5.2 To confirm that the part cargo is the same as A-140 propane or A-160 butane, the ship's propane part cargo must be (−38°F) maximum and the ship's butane part cargo must be (+32°F) maximum.
6. Should the vessel be unable to comply with the provisions of paragraphs 3 and 4, Aramco operations and engineering management representatives shall confer with the vessel's Master and/or Responsible Loading Officer to develop a loading plan/procedure for the safest possible loading for the tanks containing dissimilar residue. The plan shall be in writing, agreed to by both parties and take into consideration loading rates, temperatures, pressures and all possible safeguards to ensure minimizing the dangers to ship and shore installations. It must be understood that this procedure will involve delays to the vessel and will impose additional workloads on both shore and ship personnel.
7. *In no case will loading be permitted into ship tanks containing liquid product of a different grade in excess of 10 tons.*
8. When a vessel requires special handling, as described above, the vessel shall be given a letter of protest, with copies to owners and operators. The letter shall state that the vessel has been handled on a *one-time only basis* and advise that upon its next arrival at Ras Tanura it will have disposed of any residual cargo or have a nomination which will preclude loading dissimilar products.
9. RLPG vessels with warm cargo tanks are not normally handled at Ras Tanura. When special circumstances warrant, new ships and other vessels with warm tanks may be accommodated under the following conditions.
10. Ship tanks must be inerted. A sample must be taken by Aramco personnel from each of the vessel tanks to ensure that it has been properly inerted. Test must indicate a reading of 7.5% oxygen or lower taken by Orsat analysis or J-W oxygen indicator.
    10.1 Vapour returned during chilling operations will be sent to the shore flare system.
    10.2 The loading rate during the chill down period will be kept low and may be reduced if deemed necessary to minimize the amount of vapour sent to the flare or otherwise lost.
    10.3 The amount loaded for chilling purposes will be measured in the ship tanks by the Independent Inspector assigned and witnessed by an Aramco Inspector or NGL Shift Co-ordinator.
    10.4 After cargo for chilling tanks has been loaded aboard, the ship must proceed to anchorage and complete chilling of the other ship tanks before returning to berth to load cargo. No transfer of coolant from one tank to another shall be carried out at Berth.
    10.4.1 In case the cooling operation involves cooling of these additional tanks with an oxygen content (over 7.5%), the vessel must leave the port anchorage area.
    10.5 Upon return to berth for continuation of RLPG cargo loading, all tanks which are to receive cargo will be ullaged by the Independent Inspector and witnessed by an Aramco Inspector of NGL Shift Co-ordinator.
11. During loading of refrigerated A–140 propane or A–160 butane, shipboard readings of loading compartment temperatures and pressure by grade of cargo loaded shall be witnessed several times routinely by the NGL Shift Co-ordinator to ensure that the ship stays within the safe loading limits for temperature and pressure for each grade listed in regulations 2.1 and 2.2.
12. At completion of loading, the designated Independent Inspector will measure all cargo tanks. These ullage measurements will be taken on all ship tanks regardless of whether cargo was loaded into these tanks at Ras Tanura.
13. Vessels with part cargo on board of products other than A-140 propane or A-160 butane must be equipped to keep any liquid or vapour from those cargo parcels completely self-contained. There must be neither any return of non-compatible vapour to shore recovery system nor any venting of such vapour to atmosphere whilst at berth. No mixing of dissimilar refrigerated liquids is allowed at berth.
14. Vessels loading either propane or butane are expected to use the appropriate shore vapour return line, but only for *excess* vapour which the vessel's vapour recovery equipment cannot handle. Should excessive vapour be returned to shore and the situation cannot be corrected promptly aboard ship, the loading shall be shut down. Loading shall be resumed only after the loading plan has been reviewed with the Master or Responsible Loading Officer by the NGL Shift Co-ordinator and corrective action has been agreed upon.
15. In the event of a spill of liquid propane or butane on board the vessel, shore loading shall be shut down until proper corrective action to clean up the spill and to avoid future recurrence has been agreed upon by the Master or Responsible Loading Officer with the NGL Shift Co-ordinator.
16. There are no facilities at Ras Tanura for the return of either liquified propane or liquid butane cargo. Vessels must pay *strict* attention not to overload either of these grades.

Appendix VI

PORT REGULATIONS

The following regulations and special notes are promulgated for the use of ship's Master entering and leaving Ras Tanura and Dammam ports:

Inbound Vessels:

1. Vessels fitted with the appropriate VHF radio equipment are requested to monitor Channel 16 when in the vicinity of Ras Tanura channel and anchorage area.
2. Vessels shall report time of passing Beacon No. 3 to Ras Tanura Pilot Station.
3. Vessels shall report time of passing Buoy No. 7 to Ras Tanura Pilot Station.
4. Vessels proceeding within the area bound by Channel Buoy No. 9 and the Southern extremity of Ras Tanura anchorage should limit speed to a maximum of 5 knots.
5. No overtaking is permitted in the Ras Tanura arrival channel after passing Buoy No. 9.
6. A minimum distance of 1 mile shall be maintained between vessels proceeding in the same direction after passing Buoy No. 9.
7. Vessels passing Buoy No. 17 must navigate with extreme caution and give way to vessels departing from the berths.
8. Freighters transmitting the Ras Tanura port area, bound for Dammam, should alter course Eastward after passing clear of Buoy No. 17 and keep to the Eastern sector of the tanker anchorage.
9. Under no circumstances shall inbound vessels navigate in the buoyed deep water departure channel.

Outbound Vessels:

1. All vessels are to monitor Channel 16 when in the vicinity of Ras Tanura channel and anchorage area.
2. Vessels departing from Ras Tanura anchorage must advise Ras Tanura Pilot Office of their intentions 30 minutes before departing.
3. Freighters outbound from Dammam shall, when passing Dammam Channel Beacon No. 1, alert Ras Tanura Pilot Office of their estimated time of arrival at the Southern extremity of the tanker anchorage. Freighters should keep to the Eastern sector of the tanker anchorage and avoid the manouevring area from the anchorage to the piers.
4. Vessels manoeuvring within the area bound by the Southern extremity of the Ras Tanura anchorage and the entrance to the departure channel (Buoy 17 and 18) should limit speed to a maximum of 5 knots.
5. Any departing vessel shall not overtake any vessel ahead until both vessels have passed clear of Buoy No. 5.
6. A minimum distance of 1 mile is to be maintained between vessels proceeding in the same direction until clear of Buoy No. 5.
7. Under no circumstances shall outbound vessels navigate in the arrival channel.

Special Notes:

1. *Separation Zone (Arriving Vessels)*
   a. All arriving vessels must stay within the IMCO designated arrival lane.
   b. From the approach buoy, or entry Buoy No. 4, the width of separation zone is 0.75 mile.
   c. From Buoy No. 4 to Buoy No. 5, the separation zone is 0.5 mile.
   d. From Buoy No. 5 to Buoy No. 7, the separation zone decreases to nil.
   e. From Buoy No. 7 to Buoy No. 17, all arriving vessels must keep to the West of Buoys Nos. 7, 9, 11, 13, 15 and 17.
2. *Separation Zone (Departing Vessels)*
   a. All departing vessels must stay within the IMCO designated departure lane.
   b. From Buoy No. 17 to Buoy No. 5 all departing vessels are to keep to the East of Buoy Nos. 17, 15, 13, 11, 9, 7 and 5.
   c. The separation zone starts at Buoy No. 7 and increases to a width of 0.5 mile at Buoy No. 5.
   d. From Buoy No. 5 to Buoy No. 4 the separation zone width is 0.5 mile.
   e. From Buoy No. 4 to the entry buoy or approach buoy the separation zone width is 0.75 mile.
3. *Inner Channel*
   The inner channel at Ras Tanura Port has been buoyed for the safe navigation of deep draft outward-bound vessels where marine navigation aides have been installed in accordance with international standards. The channel has a certified depth of 69 ft. at ISLW.
4. **Keel Clearance.**
   No vessel may transit either channel unless it has at least 5 ft. of keel clearance.
5. **Communication – VHF Radio.**
   Maintaining a continuous radio watch aboard all vessels in the Ras Tanura vicinity cannot be over emphasized, particularly in the event of unforeseen circumstances developing in the port area. A two-way exchange of information is an essential prerequisite to a safe, efficient port operation. Vessels in the Ras Tanura anchorage that are not fitted with VHF radio are requested to maintain a radio watch with the local station HZY.

GENERAL:

Charts and Publications:

Surveys conducted by both American and British authorities in recent years have resulted in the publication of a number of charts of the Port of Ras Tanura and its approaches. The U.S. Defence Mapping Agency hydrographic charts are as follows:

No. 62414 – Approaches to Ras Tanura
No. 62415 – Channels to Ras Tanura
No. 62416 – Anchorages of Ras Tanura and Ad-Dammam

Vessels making for Ras Tanura should be equipped with the latest issue of the above-mentioned charts or the corresponding British Admiralty charts. In addition, it is advisable to supplement the information shown on these charts with other charts of the Gulf and publications such as Sailing Directions and List of Lights.

Current hydrographic information may be obtained by radio from "Middle East Navigational Aid Service (MEGULITE), Bahrain".

Tides and Currents:

The depths quoted in "Sailing Directions" and those shown on charts of the Arabian Gulf are based on Indian Spring Low Water (ISLW).

Locally, the diurnal tide rise is approximately 8 ft. at Springs and 5 ft. at neaps. The "Sailing Directions" present a more detailed description of the tides and currents of the locality.

Due to the peculiar configuration of the coastline at the Port of Ras Tanura, a local system of tidal currents prevail in the vicinity of the berths.

Winds

The winds in this area are not predictable for more than a very few hours. Winds of varying strength may come from any quarter. The prevailing wind, however, is from the NNW.

Winds of any strength tend to create a sharp but short, choppy sea coming up very quickly and calming down just as rapidly. Easterly winds, however, may cause heavy seas and swells lasting for a considerable period.

For a more complete description of the winds in the Arabian Gulf, refer to the "Sailing Directions".

Visibility:

The visibility in this area of the Arabian Gulf is generally fair to excellent, but at times, fine dust is held in suspension in the atmosphere and visibility is reduced to a very short distance.

These phenomena are more deceptive than fog, in that mariners are apt to believe visibility to be greater that it actually is. Fogs, with or without sand or dust, may occur in the morning hours.

Weather:

The local weather of Ras Tanura is comparatively favourable for the Arabian Gulf. The exposed position of the port permits the winds to mitigate the heat of the Summer. Temperatures usually range from a low of 45°F in February to a high of 110°F in August.

During most of the year the relative humidity is high and during the late Summer and Fall it frequently exceeds 85%.

Proper precautions should be taken to avoid sunstroke and heat prostration, particularly during the Summer and early Fall months.

Provisions;

Ship's chandlers are available for provision resupply through the ship's Agent.

Divers:

Deep sea divers, operating from modern and well-equipped boats are available. Ship's Agent must be contacted for this service.

Galley Fuel:

Galley fuel is available only at the North and South Pier, Berths 1 to 11, at approximately U.S. $107.69 per metric tonne. No galley fuel or water is available at the Ras Tanura Sea Islands, Berths 12 to 20, nor at the Ju'aymah SPM's, Berths 31 to 36.

Dry Cargo and Freight:

All Aramco dry cargo is received either at the Saudi Arabian Government piers at Dammam, about 7 miles South of Ras Tanura, or is lightered from vessels at anchorage and transported to piers as designated by the Dammam Port Officials. The dry cargo and freight piers at Dammam are owned and operated by the Government of Saudi Arabia and are entirely independent of Aramco.

Vessels bound for and departing from Dammam are to use the East Channel which is marked with 8 light buoys fitted with radar reflectors. This channel is limited to ships not exceeding 35 ft. in draft.

Currency:

The Saudi Arabian unit of currency is the Saudi Riyal (SR). As of October 1978 the official exchange rate was 3.300 Saudi Riyals to 1 U.S. Dollar, and 6.544 Saudi Riyals to 1 Pound Sterling.

Ship Agencies:

Vessels calling at either terminal of the Port of Ras Tanura should address all messages concerning ship's business to their Agents through "Aramco HZY". Matters concerning provision supply, minor repairs, local medical or hospital services, mail, crew changes, etc. are to be handled by the ship's Agent.

Import – Export Customs:

All materials to be either exported from or imported into Saudi Arabia are subject to examination by customs authorities. The importation of certain articles is strictly prohibited. Such articles include:

- Explosives and firearms, including air rifles
- Implements of war of any kind, including antiques
- Alcoholic beverages, including beer and wines
- Religious matter not pertaining to the Moslem faith
- Playing cards and gambling devices
- Narcotics

Trafficking in these items between ships also is strictly prohibited, whether the ships are at anchor or at berth. The Saudi Arabian Government forbids trafficking between ship crews and shore personnel.

Saudi Arabian Government Regulations:

Saudi Arabian Government Regulations are strictly enforced, and Masters having any doubts concerning the interpretation of these regulations are urged to consult their Agent. While in port, *whether at anchorage or at berth*, the vessel's personnel are under the jurisdiction of Saudi Arabian laws.

The taking of photographs while the ship is in the Port of Ras Tanura is prohibited by the Saudi Arabian Government.

All alcoholic beverages, including beer, table wines and liquors are to be under lock and key during a vessel's stay in port. The possession and/or consumption of alcoholic beverages is prohibited in Saudi Arabia. Penalties are severe and major delays to vessels can be incurred by Government investigations of violations.

Port Officials:

Saudi Arabian Government authorities – Customs, Quarantine, Coast Guard and Port Officials – have offices at various locations at the Ras Tanura Terminal, Ju'aymah Terminal and Rahima. The ship's Master shall make all necessary contact with the Saudi Arabian Government authorities through the ship's Agent.

A United States Consulate General is established near Dhahran, approximately 50 miles South of Ras Tanura.

A British Embassy is established on Bahrain. It is very difficult, however, to contact Bahrain by shore telephone from Ras Tanura or Ju'aymah, and Masters having business there usually arrange to call at the port of Sitrah (sometimes spelled Sitra).

SHIPMASTER'S REPORT: 1977.

I have just loaded at the above port on a 263,000 d.w.t. vessel to a draft of 67.5 ft. As the vessel was loading to a draft that meant navigating the departure channel on a rising tide, and also my first visit to the port, I requested the assistance of a Pilot for the departure channel.

I made this request 8 hours before departure to the port office and was informed it was not provided.

When the Berthing Master came to sail the ship he told me that Aramco did not provide this service irrespective of what was said in any publication and he left the vessel before it entered the departure channel.

AUTHORITIES: The Arabian American Oil Company, Dhahran, Saudi Arabia. Cable Address, Aramco, Dammam. Port Officials: Saudi Arabian Government Port Authorities located in Customs House, Port Office, and Quarantine Office at Ras Tanura.

AGENTS: Mail Address: Gulf Agency Co. Saudi Arabia, Aramco Mail Box 621, Ras Tanura, via Dhahran, Saudi Arabia. Telephones: 33171, 33132 (24-hour service). Telex: 651011, answerback "GAC RT SJ". Cables: "Confidence Bahrain". Stating "For Ras Tanura". Radio: Vessels can communicate with SSB radio station, frequencies 3539 and 6910, call-sign "Confidence Ras Tanura".

For ship to shore communication, Ras Tanura office is also equipped with VHF radio, call-sign "Confidence Ras Tanura", on Channel 16, switching to Channels 13, 6, 9 or 14 for communication.

Tanker Crew mail: To be directed to: c/o Gulf Agency Co. (Saudi Arabia) Ltd., Rahima P.O. Box, Ras Tanura, via Dhahran, Saudi Arabia, The Gulf.

YENBO (Yembo): 24.05 N. 38.03 E.

FLAG: Saudi Arabian flag must be hoisted.

LOCATION: On Red Sea coast, about 218 nautical miles North of Jeddah.

CHANNEL: Ships entering port pass a channel of the following measurement: Length 1647 m., width varying between 70 to 130 m., width at entrance between beacons 310 m.

BEACONS: 11 miles outside port, beacon at Al-Sharm. Height 23 ft. White flash every 10 seconds. At entrance of port channel 2 beacons, height 15 ft. Starboard-hand beacon (black), green flash every second. Port-hand beacon (red), red flash every second.

795 m. from channel entrance on port hand is another beacon, height 15 m. (black and white squares), white flash every second.

BUOYS: Channel is buoyed with red and green port and starboard-hand buoys.

PILOTAGE: Compulsory. Vessels requiring Pilot should exhibit code flag or International light signal.

DOCUMENTS: All vessels calling Yenbo should provide authorities with the following:

Passenger Vessels

Certificate of Registry.
International Safety Certificate (issued and validated from one of the signatory states of the pact).
Radio-telegraphy Safety Certificate.

Cargo Vessels

Certificate of Registry.
Load Line Certificate.
Safety Construction Certificate.
Safety Equipment Certificate.
Safety Wireless Certificate for vessel of 1,600 tons d.w.t. or more
Safety Wireless and Telephone Certificate for vessels of 300 tons to 1,600 tons d.w.t.

Requirements of Cargo and/or Pilgrim Documents:

For Doctor

2 copies Passenger List – Landing.
2 copies Passenger List – Transit.
2 copies Crew List.
2 copies Declaration of Health.

For Customs

2 copies Passenger List – Landing.
2 copies Passenger List – Transit.
2 copies Crew List.
2 copies Ship's Bond (tobacco, spirit, wine and beer).

For Immigration

6 copies Passenger List – Landing.

For Agents

6 Copies Passenger List – Landing.
1 copy Crew List.

Prior to the vessel's arrival the following documents are required for translation and submission to the various authorities:

7 copies of the Cargo Manifests.
1 copy of Freight Manifest.
2 copies of Stowage Plan.
2 copies Hatch List.
1 copy each non-negotiable Bills of Lading.
1 List of dangerous cargo whether for discharging or in transit.

MAX. SIZE: Max. draft 34 ft.

HEALTH: All incoming vessels should abide by health regulations and present necessary documents to the authorities in accordance with international laws, i.e. as under: Q if the health condition is clean. QQ if there is a suspicious case in the vessel. QL if there is an infectious or epidemic case on board.

RADIO: Until the implementation of a Beacon Station for navigation all ships entering port before passing the channel should contact Port Department by radio/telephone during following times: 0500 to 0600 hrs. GMT; 1000 to 1100 hrs. GMT; 1400 to 1500 hrs. GMT.

These are the decided times during normal days, but during the Hajj Season a new publication is issued to cover additional times.

BERTHING: Presently there are 9 berths available at Yenbo port including 2 old berths. Length of berths are as follows:

Berth No. 1	170 m.
Berth Nos. 2, 3, 4	525 m.
Berth Nos. 5, 6, 7	800 m.
Berth No. 8 and 9	450 m.

Max. draft permissible 34 ft.

Length restriction: no restriction depending of berth availability.

Beam: No restriction.

Barges: 8 propelled barges having capacity of 300 tons and 5 barges of 200 tons each are available.

Private mobile cranes with a capacity of up to 50 tons are available. There is also a supply of fork-lifts to meet with present port requirements. Discharge is mostly carried out by ship's own gear.

STEVEDORES: Like Jeddah, stevedoring at Yenbo, is based on daily paid basis. There are no stevedoring companies and labour is engaged on day to day basis.

There is one custom warehouse at the moment (at Easterly berth) which can accommodate about 10,000 tons of cargo. This shed is near quay and can receive cargo direct into shed from vessel.

FRESH WATER: Available by barge and truck in small quantities up to 100 tons.

CUSTOMS ALLOWANCE: Each crew member may have 200 cigarettes or 0.5 lb. tobacco, but all alcohol and wine, beer, etc., must be sealed. This applies to all persons on board. For each flask/glass/bottle containing alcohol found by the customs, there is a penalty of £100 sterling.

SHORE LEAVE: Passengers may only go ashore if they have a valid visa. Crew may go ashore if they have written permission from Master and leave their passports with passport office at the port.

DEVELOPMENTS: Contracts have been signed for the construction of 5 quays and 5 mobile platforms.

SHIPMASTER'S REPORT: January 1979.

Pilotage: Pilot boards 1 mile off harbour entrance. Pilot requires 4 days, 2 days and 24 hour notice of arrival. Pilotage compulsory.

The Pilot boards from one of 3 modern fast launches, painted white, with "Pilot" on the side. (Not to be confused with about 6 fast naval launches of similar size which are seen in the port.

Restrictions: Vessels may enter and leave at any stage of the tide during daytime only.

Max. Size: Length, no limit. Beam, no limit. Max. draft, 34 ft. Depths by echo sounder in the entrance channel indicate depths greater than 39 ft.

Tugs: Available. 3×1300 h.p. (Voith-Schneider type). Also 2 additional tugs available. Ships ropes used. No VHF facilities available.

Health: Quarantine formalities carried out alongside. Advise Jeddah Agents of quarantine particulars.

Consuls: In Jeddah.

Medical: Doctor and hospital available.

Fresh Water: Not available at time of visit.

Berthing: Berth located adjacent Yenbo town. Berth No. 1 is for small craft, berths Nos. 2–7 for large vessels and berths Nos. 8 and 9 in use but not yet completed. There is good rubber fendering on all berths.

Bulk Handling Facilities: Cement only.

Special Cargo Handling Facilities: None. However, Ro/Ro vessels with starboard quarter doors discharge at ordinary berths which are very low, being about 1 m. above the water. There is adequate storage space for handling breakbulk cargoes. Pallitised cargoes handled. There is no equipment for handling containers. There are no lighters, however, native craft are reported to be available.

Density: 1025.

Anchorage: There is no anchor outside the port.

Harbour Plan: The plan in the corner of Chart 63 is quite accurate except that a beacon has been erected now on the N.W. side of the entrance. The S.W. beacon flashed green, and is good and bright. The N.W. beacon flashes red, and is poor and weak. The channel buoys are unlit.

Cargo sheds have now been erected at berths 2, 4, 5, 6 and 7. The conspicuous minaret to the N.E. and the Water Tower at the entrance were not seen. If in existence then they are not 'Conspic'. The land to the S.E. of the entrance channel has now been fully reclaimed, and the seaward corner of it is radar conspicuous. Reclamation work is still taking place on the other area to the N.E. and a narrow causeway has been built to join the 2 reclaimed areas.

The Town: The population is said to be 40,000. The town is being rebuilt. The surrounding land is utterly flat for many miles, and entirely destitute of vegetation. The port's chief activities are imports. No known exports. Pilgrims land here to visit Medina. The port handles 25/30 ships a month, and 45 ships per month during the Pilgrim season. However, I only saw 3 ships in port. Fresh water cannot be obtained. However, if about 2 weeks notice is given water can be trucked in from about 50 km. distant.

Communications: It is 354 km. by road to Jeddah. There is no airport, or rail link. Telephone calls can be made to Jeddah with some difficulty. There is no telex link.

Name of Port: The correct spelling appears to be Yenbo, as used on the chart, and not Yanbu as used in the List of Radio Signals Vol. 6, or Yembo as used occasionally.

In furtherance of this please note that the tugboats are named Yenbo 1, 2 and 3.

Directions: Chart No. 63 is grossly inadequate for the approach to Yenbo. For call at Yenbo in January 1979 a home-made chart covering area from 23° 39′ N. to 24° 21′ N., and from 37° 28′ E. to 38° 06′ E. was made, at a scale of about 1:145,000 (i.e. 5 times larger scale than Chart No. 63).

Under no circumstances would I consider an approach to this port with the chart referred to (No. 63), which is to the scale of 1:750,000. No other Admiralty chart exists.

The Red Sea & Gulf of Aden Pilot, Supplement No. 7 – 1977 states that Ras Baridi may lie 3 miles to the North of Position charted. In fact I believe that it lies about 1.5 miles North only, but the point of land at the entrance of Sharm al Khaur (The West entrance) is correctly plotted as regards latitude, although the wrong shape.

The area of land from the entrance to Sharm Yenbo to a point about 5 miles to the West lies about 1 mile further North than charted.

The "Pilot" on P.313 advises passing at least 2.5 cables Northward of Schermo beacon. In fact this vessel passed 5.0 cables North, and the soundings found decreased in the space of 0.5 mile from 380 fathoms to 13 fathoms, then dropped off to over 300 fathoms equally abruptly. On departure we passed 1 mile off and the same ledge was found, this time with 15 fathoms over it.

The rock marked Schermo is charted as being awash, but was not sighted at 0.5 miles in daylight. Schermo beacon lies 1.8 miles Westward of this rock, and consists of 3 concrete blocks joined by catwalks, with 1 block toppled. A 30 ft. mast is erected on the centre block. Visible by radar as a very weak echo at 11 miles, as a good echo at 6–8 miles, and at 3 miles the echo can be resolved into 3 echoes. Visually, when approaching the port at 0800 hrs. the beacon could only be identified at 2 to 3 miles. On departure at dusk the light could be clearly seen at 8 to 9 miles.

Schermo beacon is the only navigation aid in the entire area. The coast in the area of Ras Baridi is radar conspicuous. The coast from Sharm al Khaur Southward to Yenbo does not show up on the radar in an identifiable manner until the vessel is within 4 to 5 miles. The echo sounder is no help, as 150 to 200 fathoms is found 1 mile off the port entrance, and apart from the 15 fathom ledge off Schermo, the rest of the inward track was over depths of 340 to 380 fathoms, with a generally level even bottom.

Recommended inward route: Steer a course of 090° along the parallel of 24° 06′ North. If on the track Ras Baridi will be found 12 miles to the North, and 5 miles further along the West side of Sharm al Khaur will be found 10 miles to the North. This course will pass 1 mile North of Schermo Beacon. When passing Schermo Beacon the cement silo in the Port of Yenbo can be seen, being the only conspicuous object bearing East. After passing Schermo steam at least 1 mile 090° before altering to 105°. Under no circumstances approach closer than 1 mile from the entrance, when embarking the Pilot.

AGENT: See "Jeddah"

ZULUF TERMINAL: 28.23 N. 49.14 E.

TERMINAL CLOSED DOWN APRIL, 1976. THE STORE BARGE HAS LEFT. NO FURTHER OPERATIONS WILL TAKE PLACE AT ZULUF.

NOTES

Please also advise Shipping Guides Ltd.

Senegal

DAKAR: 14.40 N. 17.26 W.

PORT LIMITS: *North:* from the point of Bel-Air by a parallel from N.E. of the N.E. Jetty of the harbour, to 1 mile N.E. by a meridian passing 2,900 m. East of the Round-Point determined by the crossing of Felix Eboue and Avenue de la Jetee Nord and by the parallel passing 2,060 m. North of Goree Island.

East: By the meridian passing 1 mile East of Goree.

South: By a line joining the Cape Manuel from the South point of Goree prolonged until it encounters the meridian passing 1 mile East of Goree.

DOCUMENTS:

5 Crew Lists.
2 Lists of Vaccinations.
6 Lists of Passengers in Transit.
6 Lists of Passengers Disembarking.
4 Lists of Crew Personal Effects.
4 Lists of Ship's Stores.
1 Maritime Declaration of Health.
2 Lists of Ports of Call.
5 Ship's Report Inwards.
1 Hatch List.

PILOTAGE: Pilots meet vessels off the North point of the Island of Goree in a naturally sheltered area.

RESTRICTIONS: During the rainy season, all vessels with a draft of more than 32 ft. 6 in. could be delayed due to the effects of swell to stay at anchorage in outer-roads and await meteorological conditions permitting their entry into the harbour.

Use of whistle signals to call Pilot is forbidden between 2200 and 0600 hrs. The harbour area is dredged to a depth of 10 to 11 m.

MAX. SIZE: Ships of 33 ft. draft are able to enter at all stages of the tide by day and night. Vessels up to 36 ft. draft may enter at high tide except possibly during the stormy season, between mid August and mid October.

HEALTH: Health Officials board vessel immediately after berthing alongside. For passenger vessels, these formalities are effected before berthing to avoid delays. Vessels at sea may obtain medical advice by VHF via Dakar Radio.

Inoculation/Vaccination can be arranged through Agent during weekdays.

Free pratique can be granted via radio by Agent, by using international Code Words "MIBDU/MIJMA".

VHF: The Port Captain's Office, pilot station and tugs are equipped with VHF, with the following channels: Channel 16 used by vessels approaching to contact pilot station or Port Captain's Office; Channel 12 used during manoeuvres for communications between Pilots and tugs; Channel 6 used only by the tug station.

TUGS: Operated by a private company, 4 tugs available up to 2,000 h.p. Compulsory for loaded tankers.

BERTHING: 9,000 m. of quay length available of which more than half has depths of 8 to 12 m. alongside.

Mole D'Escale: 6 berths, depth alongside 10 m., can be used for vessels refuelling simultaneously with cargo operations.

Pier 718 Phosphate quay (Pechiny). 215 m. long, max. draft of 25 ft. 7 in., loading average of 200 T/hour.

Pier 52 Phosphate quay (TA IBA). 170 m. long, max. draft of 36 ft., loading average of 1,000 T/hour.

The South area has three wharves with a depth of 26-33 ft.

Dock I is 460 m. long.

Berth No.	12	Draft	26 ft. 3 in.
,, ,,	13	,,	28 ft. 7 in.
,, ,,	14	,,	28 ft. 7 in.
,, ,,	15	,,	33 ft.
,, ,,	17	,,	33 ft.

Dock II

Berth No.	21	Draft	27 ft. 3 in.
,, ,,	22	,,	26 ft. 11 in.
,, ,,	24	,,	26 ft. 3 in.
,, ,,	25	,,	25 ft. 11 in.

Dock III 360 m. long. Max. draft of 32 ft. 10 in.

TANKERS: The Petroleum Basin is dredged to a depth of 10 to 11 m. Two jetty berths can receive tankers up to 200 m. length, max. draft 32 ft. 6 in. Petroleum Wharf: 4 berths, depth alongside 12 m. (depth in approaches 11 m.) can receive tankers up to 250 m. length with a draft of 36 ft.

STEVEDORES: Normal working hours, weekdays from 0800 to 1200 hrs. and from 1400 to 1800 hrs. Saturdays from 0800 to 1200 hrs. Overtime, weekdays from 0500 to 0800 hrs.; from 1200 to 1400 hrs.; from 1800 to 2200 hrs.; from 2200 to 0500 hrs. Holidays and Sundays from 0000 to 0500 hrs.; from 2200 to 2400 hrs.

MEDICAL: *Vaccinations;* Possible from 0800 to 1200 hrs. and 1500 to 1700 hrs. Sundays and holidays excluded. *Doctors:* All kinds of specialists available. *Hospitals:* With qualified doctors and good equipment.

FRESH WATER: All quays are fitted with water hydrants. Water supplied by 3 hoses simultaneously, with a rate from 60 to 100 cu. m.p.h. Can also be supplied by barge up to 400 tons capacity.

FUEL: All grades can be supplied from the quays up to 1,000 t. p.h. Fuel can also be supplied by barge. Also see "Shipmasters' Report".

REPAIRS: All types of repair can be effected by the Naval Arsenal or by private companies.

DRY DOCK: At the Naval Arsenal, one dry dock length 189 m., width 23 m., depth up to 9.50 m. See "Developments".

REPATRIATION: Seamen can be repatriated to Europe without delays by air.

AIRPORT: International airport with regular services to Europe.

TELEPHONES: All berths are equipped with telephone apparatus which is placed on board vessels without charge.

HOLIDAYS: New Year (1st January); Tabaski (Variable Date); National Day (4th April); Easter (Variable Date); Labour Day (1st May); Ascension Day (7th May); Whit Monday (Variable Date); Maouloud (Variable Date); National Day (14th July); Assumption (15th August); All Saints' Day (1st November); Korite (Variable Date); Christmas (25th December);

SHIPMASTER'S REPORT: With a draft in excess of 15 m. it is not possible to anchor in the inner roads due to the swell. The swell is worst from July to October (rainy season).

The Pilot directed us to an anchorage 0.5 miles N.E. of I. de Goree but in my opinion it is a little too close. However, the nearer a vessel can anchor N.E. of Goree the better. The holding ground is very good.

It is possible to talk to Mory Fuel Company direct on VHF Channel 2 . They have a barge which is able to deliver fuel oil and diesel oil, capacity 500 tons.

Three tugs available, be sure to order one well in advance before completion of bunkering or the vessel may have to wait. Bunkering undertaken day and night.

DEVELOPMENTS: A 30,000 d.w.t. (metric) capacity dry dock is under construction in Norway for the port and is expected to be towed to Dakar in the Spring of 1980.

AUTHORITY: Port Autonome de Dakar.

AGENT: Socopao Senegal, 47 Avenue Albert Sarrault, B.P. 233. Tel. 51195. Telex 521.621.622. Cables "Freight Dakar".

KAOLACK: 14.09 N. 16.06 W.

DOCUMENTS:

2 Crew Lists.
2 Store Lists.
2 Manifest pacotille (tobacco, wine, etc.). Agents deposit to Customs office.

PILOTAGE: Pilot taken on board, and lands in Dakar. When vessels do not require tank-washing, the Pilot disembarks in roadstead.

ANCHORAGES: Sufficient for three vessels only. About 6 m. deep.

RESTRICTIONS: Night navigation forbidden in River Saloum.

MAX. SIZE: Length 105 m. (because of River Valor).

HEALTH: Agent signals to Harbour Master. Provisionally vessels quarantine in Dakar. No hospital.

TUGS: No tugs. (Only from Dakar.)

BERTHING: Signals by flag when berth available. Vessels enter at flood tide so that they can turn at anchorage to be ready for sailing.

MEDICAL: Yellow fever vaccinations only at Dakar. No hospital facilities.

DENSITY: August to December: sea water. January to July: 1.55.

FRESH WATER: Available at 10 t.p.h.

FUEL: None available.

GANGWAY/DECK WATCHMEN: Arranged by Agent.

OPENING/CLOSING HATCHES: By stevedores.

CUSTOMS ALLOWANCE: Tobacco, No restrictions, but Customs control on board (declaration on manifest). Crew going ashore only allowed cigarettes marked "Vente au Senegal". Wine and/or Spirit, Not limited, Customs controlled.

IDENTIFICATION CARDS: Not necessary.

CONSULS: None (Dakar only). French Consulate Agent: Mr Jean Guillemot. UTRAM. Tel. 87. Telex Mafic 781 SG.

REPAIRS: None (only Dakar).

REPATRIATION: Not possible (Dakar only).

AIRPORT: None.

TIME: GMT Permanent.

HOLIDAYS: Independence Day (4th April) no loading. Tabaski (dependent on moon phase).

FIRE: Tel. 324.

TELEPHONES: Not possible to place on board.

SHORE LEAVE: Crew members allowed ashore.

REGULATIONS: Vessels must hoist Senegalese flag and notify Agent before entering port.

AUTHORITY: Harbour Master.

AGENT: Socopao Senegal, B.P. 202, Kaolack. Tel: 87.025. Telex: 7460 Freight SG.

Seychelles

PORT VICTORIA, Mahe: 04.37 S. 55.28 E.

DOCUMENTS:

Maritime Declaration of Health – forms obtainable from Medical Officer.

Deratisation Certificate.

5 Crew Lists and Passengers' Lists.

Dangerous Cargo List.

Ship's Register.

Crew Declaration Form.

Declaration of Stores.

Parcels List.

Firearms List.

List of Animals remaining on board.

Un-manifested Cargo List.

Cargo Manifests.

PILOTAGE: Compulsory in inner and outer harbour for any vessel of or exceeding 150 tons net burdened register.

24 hours notice, giving draft and length. Telegraphic address "Demarine" through Cable & Wireless (on schedule 500 kc/s. and 8714 mc/s. Schedule published in Radio list. Harbour control equipped with VHF Channels 16, 12 and 6).

Pilot Boat: White hull with blue cabin, with "H" flag.

Signals for Pilot: "G" by flag and/or whistle and by night "G" by morse. Pilot boat stationed inshore and proceeds to sea to meet approaching vessels. Pilot can board in any weather. While awaiting Pilot; vessel can anchor in any suitable anchorage in the pilotage area. Vessels should call "Harbour Control" on VHF, Channel 16, two hours before arrival between 0700 and 1800 hrs. Between 1800 and 0700 hrs. the station may not be manned.

ANCHORAGES: (1) Anchorage A. In depth of 66 to 72 ft., fine sand and shells. Good holding, 9.75 cables, 058 degrees from Victoria Lighthouse.

(2) Anchorage B. In depth of about 64 ft., sand and coral. Good holding, 8.25 cables, 074 degrees from Victoria Lighthouse.

(3) Anchorage D. In depth of 78 ft. coral and sand. Good holding, 3 cables, 048 degrees from Victoria Lighthouse.

(4) Anchorage E. In depth of about 78 ft., sand and shells. Good holding, 1.25 miles, 089.5 degrees from Victoria Lighthouse. Super tankers and large vessels anchor outside the Fairway Buoy in any suitable anchorage. The Master should always contact Harbour Master for anchorage instructions.

RESTRICTIONS: All shipping movement in Inner Harbour to take place during daylight hours only. In Outer Harbour, night movement at discretion of Master. No tide restrictions.

HEALTH: "Q" Flag or international red over white. Medical Officer boards vessels at anchor and before entering Inner Harbour. Crew Lists with vaccination dates against smallpox, yellow fever and cholera if vessel from infected places. Health clearance given at Port Victoria only. Hospital facilities available. Vessels proceeding to the inner harbour may be disinsectised.

RADIO: Cable and Wireless, Port Victoria, Mahe. Call sign ZCQ. Harbour Control equipped with VHF, Channels 16, 12 and 6.

TUGS: One twin-engine 2,000 b.h.p. tug in full operation. Vessels of up to 650 ft. are able to berth alongside.

BERTHING: Due to limited space no berth can be reserved either alongside or at anchorage. All assistance given to position every ship in best available place.

Mahe Quay (New deep water port) is now in full operation. Two vessels can berth alongside. Berth No. 1 is allocated to oil and cement tankers and Berth No. 2 to cargo and passenger ships. Maximum depth of water at all berths is 35 ft. There are connections for fuel, fresh water and telephones at all berths. Passenger terminal, Port Offices and Customs are situated at the New Port area.

A tanker berth at Seychelles International Airport supplies fuel to the Airport.

STEVEDORES: ETA advice required two to three days before ship's arrival in port. Loading and Discharging: General Cargo: average 8 to 10 t.p.h. per gang (subject weather conditions). Bagged Cargo: average 10 to 15 t.p.h. per gang (subject weather conditions).

TANKERS: Usual safety requirements. Max. length 400 ft. No night discharge at present. Discharge line 6 in.

DENSITY: Average 1025 at all states of tide.

FRESH WATER: In good supply. By mains when alongside and steel barges when at anchor. All water supplied is chlorinated. Two special steel water barges with capacity of 100 and 80 tons each with pumping capacity of 40 t.p.h. per barge. Vessels should request water at least 72 hours before arrival.

FUEL: Marine diesel, viscosity Redwood 42 secs. at 100° F. Gas oil viscosity Redwood 35 secs. at 100° F. Due to limited stock, it is advisable to give one week's notice, preferably through Shell International, London.

GANGWAY/DECK WATCHMEN: Customs Officer on duty at all times if vessel is discharging cargo.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CUSTOMS ALLOWANCE: At Custom Officer's discretion.

CARGO GEAR: All cargo slings and gears supplied by ship.

IDENTIFICATION CARDS: See "Shore Leave".

CONSULS: Madagascar, Netherlands, Norway, Sweden, Denmark, Finland and Iceland.

REPAIRS: Only minor repairs to deck: gas welding, pipe bending, etc.

DRY DOCKS: None.

REPATRIATION: Crew changes for British ships and nationalities represented. Repatriations for same by Agents.

AIRPORT: In operation. Several flights weekly.

TIME: GMT plus 4 hours, throughout year.

HOLIDAYS: New Year (1st and 2nd); Good Friday; Corpus Christi (15th August); Labour Day (May 1st); Liberation Day (June 5th); Independence Day (June 29th); Assumption Day (August 15th); All Saints' Day (November 1st); Immaculate Conception (December 8th); Christmas Day (December 25th).

POLICE/AMBULANCE/FIRE: Police 22011; Fire 2555; Ambulance 2555.

A telephone is placed on board ships alongside. Rate as follows: Warships Rs 40/-per day. Other ships Rs 30/-per day.

SERVICES: No tank-cleaning equipment, no facilities for discharge of tank washing, no compass adjusting, radar or radio engineer available for small repairs.

SHORE LEAVE: All members of the crew are allowed ashore. No limit to shore leave. Crew to be in possession of identity card or discharge book.

DELAYS: Berthing: limited berth. Loading or discharging: weather conditions. Bunkering: space alongside.

REFUSE: No refuse to be dumped in the harbour and approaches. When alongside Mahe Quay, adequate bins for garbage collection are available on the quay.

AUTHORITY: Port Department, Ministry of Transport.

NOTES

Please also advise Shipping Guides Ltd.

Sierra Leone

FREETOWN: 08.30 N. 13.14 W (See Plan Book)

DOCUMENTS:

5 Crew Lists.
5 Ports of Call Lists.
5 Passengers in Transit Lists.
5 Passengers Landing Lists.
1 Crew Declaration (signed by Crew members).
1 Store List.
1 Arms Ammunition List.
1 Port Health Declaration.
1 Vaccination List (smallpox, cholera and yellow fever).

Port Health Declaration, Crew Declaration Form and Arms and Ammunition List, all special forms, which obtained from boarding party or, if required, mailed in advance to ship's owners.

1. *For vessels working cargo (discharging):*

(a) From each port of loading, by air mail to vessels Agent: 2 copies of Cargo Manifest, 1 copy of Freighted Manifest.

(b) On arrival: 5 copies of Cargo Manifests, 1 copy each Bill of Lading (non-negotiable).

Note: Customs and Port Authority insists on documents in English, and that Manifests should show weights and measurements. Non-compliance with these instructions places vessel's Agent in difficult position, and vessel may not discharge without payment of fine.

2. *Required by Port & Stevedores for vessels working cargo:* 4 copies Stowage Plan, 4 copies Hatch Lists. List of all lifts over 3 tons.

PILOTAGE: Vessels can enter and leave port anchorage without Pilot. Pilotage only compulsory for vessels berthing alongside Queen Elizabeth 2nd Quay or Kissy Oil Jetty. Upon Master's request, Pilot available at Fairway Buoy with 24 hours notice. Normally only at daylight hours. Port entrance is between Cape Sierra Leone to South and Fairway Buoy to North. Is approx. 1 mile wide and min. draft 36 ft. To West harbour is protected by sand shoals, nearest to entrance is O'Farrell Shoal about 1.5 mile North of Cape Sierra Leone.

Pilots board from a launch painted black, with white superstructure, with letter "P" on each bow.

Aberdeen Signal Station will give an anchorage to every vessel arriving or, if a vessel is berthing on arrival, will advise where the Pilot is boarding. This is normally off the quay. The Signal station is equipped with VHF, standing-by on Channel 16, switching to Channel 12 for communication.

The Pilot Office, Queen Elizabeth II Quay, is also equipped with VHF, standing-by on Channel 16, switching to Channel 12 for communication. The Port Operations Manager is available on this link.

ANCHORAGE: With Falconbridge Point Beacon bearing as follows (all bearings true): Note: Falconbridge Point Beacon circular steel tower 8 ft. high, painted white with 2 horizontal black bands; Fl. white every 2 seconds.

Anchor Berth	*Bearing (T)*	*Distance (Cables)*
E. 3	138	10.5
E. 4	154	9
E. 5	180	8
E. 6	207	8
F. 5	136	7
F. 6	154	6
F. 7	184	5
F. 8	210	5
F. 9	232	7
F. 10	242	9
F. 11	249	11
G. 1	099	15
G. 2	100	12
G. 3	104	7
G. 4	126	3
H. 1	184	2
H. 2	234	3
H. 3	252	5
H. 4	258	7
B. 1	236	11 (Vessels bunkering ex-barge)

With Cline Point bearings as follows

Anchor Berth	*Bearing (T)*	*Distance (Cables)*
D. 1	232	5.5
D. 2	253	7
D. 3	253	3
D. 4	273	5.5
C. 1	244	4
C. 2	270	5
B. 3	280	7.25

With Kissy Oil Jetty bearing as follows (T):

Anchor Berth	*Bearing (T)*	*Distance (Cables)*
B. 2	235	1 mile

No draft restriction at anchorage, also no length and beam restrictions and vessels can arrive and sail any hour day and night.

RESTRICTIONS: *Draft Limits for Deep Laden Vessels:* (Draft Limits: 38 ft. (11.6 m.) plus height of tide to a maximum of 48 ft. (14.6 m.).

Time Limits:

1. From 5 hours flood tide to high water.
2. From low water to 1 hour Flood Tide.
3. During hours of daylight only.

Vessels of 36 ft. draft and over must keep to the time limits.

Vessels of under 36 ft. draft may navigate the channel at any time but attention is drawn to the strong cross currents.

(H.M.S. Hydra has commented strongly on this danger).

HEALTH: Pratique by radio or on boarding. See "Agents Cable Requirements"

RADIO: *Freetown Radio, Coast Station:*

Watch is maintained on 500 kc/s from 0700–2200 hrs. GMT on week-days, and 1200–1400 hrs. GMT on Sundays and Public Holidays.

The working frequency is 421 kc/s and traffic lists are broadcast on this frequency after preliminary announcements on 500 kc/s at 0730, 0830 hrs., etc.: up to 2130 hrs. GMT. On Sundays and holidays, traffic lists are broadcast at 0800, 1200 hrs. and 1700 hrs. GMT.

Time GMT	*9LL Freq.*	*Search-band for reply*
0800–0900 hrs.		
1300–1430 hrs.	6411	6 mc/s
1700–1830 hrs.		
0900–1000 hrs.		
1200–1300 hrs.	8710	8 mc/s
1830–2000 hrs.		
1000–1100 hrs.	13042.5	12 mc/s
1530–1700 hrs.		

On Sundays and other holidays the H.F. Schedules are as follows:—

0830–0900 hrs.	8710	8354 to 8374 kc/s
0930–1000 hrs.	13042.5	12531 to 12561 kc/s
1330–1400 hrs.	6411	6 mc/s
1600–1630 hrs.	13042.5	12531 to 12561 kc/s
1700–1730 hrs.	8710	8354 to 8374 kc/s

Traffic lists are broadcast at the commencement of every HF Schedule and repeated at intervals during the Schedule.

Ships Radio telephone and Harbour Service: Watch is kept on 2182 kc/s for casual R/T traffic from 0800–2000 hrs. GMT on weekdays, and 0800–1730 hrs. GMT on Sundays and holidays.

Ships are advised to arrange their calls in advance by W/T where possible so it can be ensured that the called party is available. Calls can be connected to or from any number on the Freetown Telephone Exchange. Longer range contacts should be in the 8 mc/s maritime band, the frequency of 9LL in this band being 8768.9 kc/s.

Other Services: Navigational warnings issued from time to time by the Harbour Master are broadcast on W/T. Spoken telegrams are accepted at ordinary W/T rates on RT.

VHF: *Freetown Radio:*

A 24-hour watch is kept on Channel 16 switching to Channel 26 for communication. Calls can be connected to the Freetown Exchange. Masters are advised the fullest use should be made of this service, particularly after office hours and during the early hours of the morning or late at night when no cable service is available. The Authority tugs are also equipped with VHF, watch being kept on Channel 16 switching to Channel 12 for communication. The same is applicable to the Lighterage service, which keeps watch and communicates on Channel 12.

Signal Station	Channel 16
Pilot Office (Freetown Pilot)	Channel 16
Harbour Master	Channel 16
Operations Manager (OPMAN)	Channel 16

AGENTS CABLE REQUIREMENTS: Masters requested cable ETA as early as possible. Following information required:

(a) For vessels working cargo: 1. Discharge or Loading Hatch distribution. 2. Gangs required. 3. If Explosives on board for Freetown or in transit.

(b) For vessels bunkering: Bunkers and water required.

(c) For Tankers discharging: 1. Total Displacement. 2. Draft. 3. Cargo particulars (quantity and grade).

(d) For vessels embarking/disembarking krooboys: 1. If krooboys provisions required and for how long. 2. Cash requirements. 3. If service on arrival if arriving between 2200 hrs. and 0700 hrs., bearing in mind the high costs for Customs overtime and port service.

(e) In general: 1. Cash requirements. 2. Water requirements. 3. Medical attendance, if required on arrival.

When ETA received and confirmed agent will cable vessel informing despatch prospects and if not berthing on arrival, anchor berth.

Note: For vessels returning to Freetown from round trip to coast, information should be cabled if any over-carried cargo, etc., to be discharged.

TUGS: Two tugs available, *Sewa* (2,200 h.p.) which is sea-going and *Bintimani* (2,200 h.p.). Both are twin-screw with diesel engines and are equipped for salvage having fire-fighting equipment and a 10-ton derrick. Normally 1 tug used for berthing and unberthing operations, but 2 if necessary. Charges for berthing and unberthing include use of 1 tug, whether required or not. Tugs' lines £3.50.

BERTHING: All alongside berths: between hours of 0630 and 2330. Kissy Oil Jetty; vessels of 15,000 tons and upwards, berthing flood-tide only.

Queen Elizabeth II Quay No. 1: Berthing length: no restriction; breadth: no restriction; max. draft 31 ft. 6 in. At this draft vessels must be 180 ft. from steps East end of quay. Vessels up to draft not exceeding 24 ft. may berth as far East as steps. Unberthing not permitted from 1 hour after high water until 1 hour after low water. Pilots may at their discretion, under favourable conditions, extend these times.

Berth No. 1A: As for Berth No. 1, max. draft 31 ft. 06 in.

Berth No. 2: Berthing and unberthing, length and breadth no restrictions. Max. draft 31 ft. 06 in. No tidal restrictions.

Berths No 3 and 4. Max. draft 32 ft. 06 ins.

Berths No. 5 and 6. Max. draft 30 ft.

Temporary draft restriction of 24 ft. at Berth No. 6. Expected to be removed before the end of 1978 when dredging completed.

Facilities for loading Palm Kernel Oil available only at Berth No. 1.

Bulk Grain: No. 1 Berth is equipped for discharging grain in bulk through a conveyor built on No. 1 Shed to the Flour Mill. The actual discharge is effected by mobile vacuvators. Four such units are available with total potential of 80 t.p.h., though a more realistic figure would be in the region of 60–70 t.p.h. Grain vessels are worked around the clock.

Pilotage also undertaken to and from Kissy Cold Store Jetty, a private jetty, but pilotage not compulsory.

King Tom Jetty: Berthing *not* allowed.

Kissy Cold Store Jetty: Berthing and unberthing in daylight hours only, restricted as follows: Length of vessel 290 ft. Breadth, no restriction. Max. draft, 14 ft. 06 in. Favourable weather conditions. Berthing Port side alongside Pontoon/lighter; Starboard anchor to be used. Berthing: 30 mins. to H.W. Unberthing: 1 hour after H.W. Tug must be used for both operations.

Dispensation will only be granted in exceptional circumstances to berth or unberth vessels before 0600 hrs. and after 2330 hrs.

During discharging and/or loading, Customs Officers, normally 2, as well as 2 Port Authority Discrepancy Clerks (only when discharging) will be on board. In accordance with regulations same should be provided with food during normal meal hours. Recommended that vessels provide food in order not to encounter unnecessary delays.

Sherbro River: Anchorage daylight only. Length of vessel up to 470 ft. Breadth, no restrictions. Max. draft, 24 ft. 06 in. The passage between No. 1 Buoy and No. 8 Buoy and between No. 1 Buoy and Yangsai anchorage must be navigated in daylight hours only.

The Channel between Buoy Point and Yangsai must be navigated only during period 2 hours to H.W., and on a rising tide, buoy point being area which restricts draft. Bagru River Anchorage Buoy 8, length and breadth unlimited. Max. draft 24 ft. 06 in. Limitations as regards vessel's dimensions, drafts and times at which movements may be carried out should not be deviated from without prior permission of the Harbour Master.

MECHANICAL EQUIPMENT:

Type	*Capacity*	*Complement*
Portal Quay Crane	3 tons	2
Portal Quay Crane	5 tons	1
Mobile Crane	15/30 tons	1
Mobile Crane	3 tons	2
Mobile Crane	4 tons	9
Mobile Crane	5 tons	1
Mobile Crane	7 tons	2
Fork Trucks	10 tons	3
Fork trucks	4,000/5,000 lbs.	34
Tractors	—	11
Trailers	6 tons	12
Trailers	8 tons	1
Trailers	10 tons	16
Trailers	20 tons	18
Trailers (Pole)	10 tons	4
Landrover Fire Engine	—	2
Lancer Boss Fork Lift Truck (Contaner Handler)	26 tons	1

Berths 3 to 6 are not equipped with Portal Cranes.

DANGEROUS CARGO: Dangerous cargo, explosives, small arms, ammunition, *must not* be unloaded either alongside or into lighters unless Port Authority has been notified on approved form, and has given permission for cargo to be discharged. Vessels should cable prior arrival if dangerous cargo for discharge on board.

LIGHTERAGE: Lighterage operations have now virtually ceased to exist. 1 covered lighter of 100 d.w.t. 5,000 bale capacity is available if required.

A specially fitted pontoon (PM2) is also available for the disembarkation/embarkation of Kroo labour for vessels at anchorage. This service is available throughout the day and night, as is the water supply by barge.

STEVEDORES: (See "Agents Cable Requirements") ETA as soon as possible. Discharge/loading hatch distribution. Gangs required. Bunkers and water requirements information re explosives. For tankers discharging — total displacement and draft. Work ashore undertaken by Sierra Leone Ports Authority on cargo quay, Queen Elizabeth II Quay, whilst work on board as well as discharging and/or loading to or from lighters at stream undertaken by Sierra Leone National Shipping Co., stevedoring division.

Working hours alongside quay: Normal working hours from 0800 to 1200 hrs., from 1300 to 1700 hrs., Saturdays: from 0800 to 1200 hrs.

No meal-break but the hour 1200 to 1330 hrs. counts overtime.

Working at Stream: Discharging and/or loading to or from lighters effected 24 hours a day. Gangs can be arranged at anytime between 0730 hrs. and 1800 hrs. week-days. On Sundays and holidays work must be arranged on the previous day.

MEDICAL: Hospital facilities available.

TANKERS: No special requirements. 2 berths, max. length 600 ft. (may be extended by arrangement with Pilot). Max. draft 32 ft.

Berth 6: There is a draft restriction of 24 ft. See "Berthing". Crude Oil tankers at this draft discharging through the temporary facilities must berth on the first of the ebb tide (Starboard side alongside). Other ships at this draft must berth from 1 hour prior to H.W. to H.W. slack (either side alongside).

Kissy Oil Jetty: The following Rules and Regulations on Berthing and Unberthing are now in force. No deviation under any circumstances from these is permitted.

Mooring Buoys: Berthing and Unberthing are restricted as follows:— Vessels are to moor to head, stern and starboard quarter mooring buoys off Kissy Oil Jetty. Vessels anchor to be used. Vessels are only allowed to berth/unberth beginning of Flood Tide in favourable weather conditions between hours of Sunrise and Sunset. Pilots are to ensure that a Berthing or Unberthing operation must be completed before darkness. No Unberthing during hours of Darkness or Ebb Tide.

Distance between Head (West) and Stern (East) buoys 1,100 ft. Length of vessel to within this limit allowing safety factor for length of mooring ropes to Head and Stern buoys. Breadth no restriction. Max. draft 32 ft. Mooring restricted to vessels up to and not more than 27,000 tons displacement.

Under no circumstances are vessels allowed to rest against any part of Kissy Oil Jetty centre section or East and West Dolphins.

Moorings from vessel to Shore Bollards can be used to position vessel as close to Kissy Oil Jetty as possible. No moorings are to be used on any part of Kissy Oil Jetty.

Also see "Developments".

DENSITY: 1018 to 1025.

FRESH WATER: Good fresh water is available at all quay berths and at Kissy Oil Jetty. There are also 3 water barges with a total capacity of approximately 400 tons.

(Supply Rates:—	Old berths	Approx: 20/25 t.p.h.
Dependent on	New berths	Approx: 40/50 t.p.h.
Ships intake)	Kissy Oil Jetty	Approx: 15/20 t.p.h.
	Barges	Approx: 25/30 t.p.h.

FUEL: A 24 hour Shell/Mobil bunkering service is available at all berths. The supply rate is up to 200 t.p.h. dependent on ships intake.

The supply rate at Kissy Oil Jetty is 100 t.p.h. Thin fuel oil is not available at the latter jetty but is obtainable at Queen Elizabeth II Quay.

A limited supply of Gas Oil (Shell) is available ex-bowsers on the Quay berths. Sufficient notice should be given to the Oil Company for this service.

Texaco/BP supply bunkers to vessels at anchorage with 3 barges of 750 tons capacity each supply rate 200 t.p.h. 1 of their tugs also has a storage capacity of 40 tons.

A 24-hour Pilotage service is available (including Pilotage from the Fairway Buoy if requested) for all vessels requiring bunkers only.

GANGWAY/DECK WATCHMEN: Strongly recommended, available through Agent.

OPENING/CLOSING HATCHES: By stevedores, except mechanical hatches.

CERTIFICATES:

Ship's Register.

Deratisation Certificate.

Deck Passengers Certificate.

Radio Certificate.

CUSTOMS ALLOWANCE: Tobacco, 40 cigarettes *or* 0.25 lb tobacco. Wine and/or Spirits, 0.25 bottle of spirits. Master — 200 cigarettes and one opened bottle of spirit.

IDENTIFICATION CARDS: Not required.

CONSULS:

Belgium	50143	Japan	22721
China (People's Republic)		Lebanon	22353
	31797	Liberia	40322
Cuba	26084	Malagasy	25850
Denmark	25760	Netherlands	25245
France	22477	Nigeria	22444
Gambia	25191	Norway	50824
Germany Fed. Rep.	22511	Sweden	22385
Ghana	23461	Switzerland	23322
Greece	23087	Egypt	23244
Guinea	23080	United Kingdom	23961/6
India	24340	United States	26481
Italy	30995	U.S.S.R.	23991
Ivory Coast	23983	United Nations (UNDP)	25311

REPAIRS: All repairs if spares supplied.

DRY DOCKS: No dry docks in Freetown. Slipway of 600 tons capacity.

REPATRIATION: Can be arranged.

AIRPORT: By bus and ferry to Lungi Airport, 1 hour journey. Served by regular airlines.

TIME: GMT throughout year.

HOLIDAYS: Several religious and anniversary holidays. Port works every day except Good Friday and Christmas Day.

POLICE/AMBULANCE/FIRE: For all emergencies dial 009.

TELEPHONES: Not available for placing on board.

GENERAL: Always confirm time of entering harbour with the Aberdeen Hill Signal Station to ensure turn for berthing. Draft should be indicated.

SERVICES: Tank cleaning. Tank and hull scaling.

SHORE LEAVE: Allowed. Identity cards must be carried.

DELAYS: Berthing, loading or discharging — up to 1 day. Bunkering — up to 12 hours.
DEVELOPMENTS: A new oil jetty at Kissy may be in operation during latter half of 1979. Any rules and regulations for the new jetty will be promulgated in due course. When the oil jetty is completed the temporary oil lines to Berth No. 6 will be removed.

It is the Port Authorities intention to surface the front and rear stacking areas at Berth Nos. 5 and 6 for use as a container park.
AUTHORITY: Sierra Leone Ports Authority. Managers: Waportman International Ltd.

PEPEL: 08.34 N. 13.04 W.

IMPORTANT: SEE "AUTHORITY".
LOCATION: On Sierra Leone River, 15 miles upstream from Freetown. Approach Channel between Freetown anchorage and Pepel is fully buoyed. No night navigation.
DOCUMENTS: See "Freetown".
PILOTAGE: Private pilotage undertaken by mining Company's Pilots who board Freetown anchorage, 48 hours ETA required, cable "Mags Freetown Sierra Leone", giving ETA Fairway buoy, quantity water/fuel required, asking free pratique, and if Pilot required to Freetown anchorage.
ANCHORAGE: See "Freetown".
RESTRICTIONS: Draft only, decided at discretion of berthing master. Entry daylight hours only. Channel between Pepel and Freetown is now deepened so that depth in channel is 38 ft. plus height of tide. According official tide tables, range of high tides is approximately 7 ft. to 11 ft. above Admiralty Chart Datum.
MAX. SIZE: Length 840 ft., beam 128 ft., depth water 38 ft. plus height of tide which ranges from 7 to 11 ft. above Chart Datum. September to December additional draft restrictions due channel silting.
HEALTH: See "Freetown". 48 hours advance warning for free pratique.
TUGS: Not used.
BERTHING: Milton Margai Pier only. Loading up to 3,000 t.p.h. according to size of vessel.

New dolphin mooring system installed to permit handling larger ships. Depth alongside 45 ft.

Shiploader max. boom height when in horizontal position is 71 ft. above Chart Datum, with max. outreach 87 ft. from berthing line. Loading rate now increased to 4,000 t.p.h.

Under the new conditions, limiting dimensions for ships (which must be equipped with satisfactory mooring equipment): Length overall 840 ft. Moulded breadth 128 ft.

Allowance must be made for safe navigation, permissible sailing draft of all ships will, as at present, remain absolutely at discretion of Berthing Master at Pepel or his deputy. It is possible that yearly during the months of September to December an additional draft allowance will have to be imposed by reason of seasonal silting of the channel, but it is intended to carry out annual maintenance dredging.

Company will be prepared to consider acceptance of ships having dimensions in excess to those above but only after specific approval of fully detailed plans of each ship concerned and, in any event, not in excess of dimensions Length overall 870 ft. Moulded breadth 136 ft. Moulded depth 73 ft.

Berthing displacement 63,000 tons on an even keel ballast draft of 23 ft. forward and aft on berthing.
STEVEDORES: Available.
FRESH WATER: Available, 48 hours notice required.
FUEL: Limited supplies available, 48 hours notice required.
GENERAL: See "Freetown" for all general information.
TIME: GMT throughout year.
TELEPHONES: None available.
SHORE LEAVE: Not allowed. Customs and Immigration regulations prohibit any member of crew from disembarking at jetty or other works.
DELAYS: First come first served.
AUTHORITY: The Sierra Leone Development Company Limited (In Liquidation), P.O. Box 491, Freetown, Republic of Sierra Leone. Telephone Freetown 24139.

(The Sierra Leone Development Co., Ltd. went into voluntary liquidation on the 31st October, 1975. A Care and Maintenance Party is stationed at the Port of Pepel maintaining the shiploading plant in operational condition).

At the time of liquidation, the conditions above existed.

NOTES

Please also advise Shipping Guides Ltd.

SINGAPORE (incl. Jurong, Pulau Bukom, Pulau Ayer Chawan, Sembawang and Tanjong Penjuru): 01.16 N. 103.50 E. (See Plan Book)

DOCUMENTS:

6 Ship's Passenger Lists.
5 Crew Lists.
5 Cargo Manifests.

Customs Declaration of duty free liquor and tobacco Form (C and E 117) to be furnished by Master to Customs boarding officers. Master, mate, or authorised officer required to furnish information asked for by Officer i/c of Customs Boarding Party for Boarding Officer's Report (this only required if ship is to be searched).

Immigration: 4 copies Crew List and 2 copies each of Disembarking and Through-passenger Lists on arrival. At departure, 2 copies Crew List and 2 copies Passenger List.

Declaration regarding presence on board of any stowaway, unauthorised person and/or repatriate.

PSA: All vessels: General Declaration on arrival or departure.

Port Health: Entry Declaration. Deratisation or Exemption Certificate. Vaccination Certificate requirements. Smallpox: from all countries, except children under 1 year of age if they arrive from a non-infected area or under 6 months of age if they arrive from an infected area.

Crew Lists. Passenger List.

PSA (The Port of Singapore Authority): Arms and Explosives, and Dangerous Goods and Petroleum Declaration.

TRAFFIC LANES:

Inwards only

1. *The Sisters Fairway* is the navigable water bounded by the line drawn from Selegi Beacon (Terembu Selegi) to the Northern extremity of Pulau Tekukor, thence from the Southern extremity of Pulau Tekukor to the Northern extremity of West St. John's Island to position Lat. 01° 12′ 33″ N., Long. 103° 50′ 30″ E., thence to Selegi Beacon (Terembu Selegi).

2. *The Middle Channel* is the navigable water bounded by the line drawn from the charted position of Sisters Buoy to position Lat. 01° 12′ 09″ N., Long. 103° 49′ 19″ E., thence to position Lat. 01° 12′ 16″ N., Long. 103° 49′ 41″ E., thence to position Lat. 01° 13′ 09″ N., Long. 103° 48′ 41″ E., thence to the charted position of Sisters Buoy (Lat. 01° 13′ 02″ N. Long 103° 48′ 04″ E.).

Outwards only

3. *The Jong Fairway* is the navigable water bounded by the line drawn from the charted position of Sisters Buoy to position Lat. 01° 12′ 09″ N., Long. 103° 49′ 19″ E., thence to Sebarok Beacon, thence to Pulau Jong Triangulation Station, thence to the charted position of Sisters Buoy. Only those vessels which are inward bound and owing to their draft and other considerations preclude the safe use of the above mentioned *inward channels* may use the Jong Fairway.

Eastbound and Westbound

4. *The Southern Fairway* is the navigable water bounded by the lines drawn from Sebarok Beacon to the Southern extremity of West St. John's Island, thence to Temborkul Beacon, thence with Seringal Beacon in transit witth Peak Island Light Beacon to the Southern port limit, thence Westwards along the port limit until Sebarok Beacon bears 313°, thence along that line to Sebarok Beacon. The Southern Fairway is to be considered sub-divided by a median line extending from the Western limit to the Eastern limit of the fairway.

The Southern Fairway is designated for the passage of vessels as follows:

(a) Vessels from sea East/Eastern sector of the port proceeding to the Western sector to keep Northwards of the median line:
(b) Vessels from the Western sector of the port bound for the Eastern sector to keep Southwards of the median line;
(c) Vessels from the Western sector of the port bound for the sea East to keep Southwards of the median line and to proceed beyond the Easternmost limit of the Southern Fairway. Vessels after having proceeded beyond the Easternmost limits of this Fairway shall enter Main Straits only when it is safe and practicable to do so.

Vessels proceeding from/to the following areas need not follow the Southern Fairway but may proceed as stated:

(a) Vessels from sea Westbound for the Western sector of the port via the Middle Channel or Sisters Channel may cross the Southern Fairway when it is safe and practicable to do so.
(b) Vessels from the Western sector of the port bound for sea West may cross the Southern Fairway and on reaching the port limit enter the Main Straits when it is safe and practicable to do so.

PILOTAGE: Compulsory in Keppel Harbour, including East Lagoon, the Western sector and Sembawang from Johore Shoal Buoy to the Causeway. Request for Pilot must be made not less than 6 hours before arrival. Confirmations of arrival and amendment of ETA must be further notified to "Singapore Port Operations" not less than 2 hours before arrival. Telegraphic Address: PORTMASTER SINGAPORE. VHF Singapore Port Operations Channel 20 or 12.

Pilot Boarding and Disembarkation Grounds:

(a) *Eastern Boarding Ground:* 2.5 miles East of Sekijang Beacon (St. John's Island Lighthouse).

(b) *Western Boarding Ground:* 1 mile S.W. of Sultan Shoal Lighthouse;

(c) *Southern Boarding Ground:* 1 mile S.W. of Sebarok Beacon (used only by special arrangement); and

(d) *East Johore Straits Boarding Ground:* S.E. of Johore Shoal Buoy in position 01° 18′ 00″ N., 104° 05′ 30″ E.

ANCHORAGES: Masters are required to notify "Singapore Port Operations" on Channel 12, their final anchoring positions giving bearings and distances from the following positions: Fullerton Lighthouse (Eastern sector), Tg Rimau Light (Rimau Beacon) – (Western sector), Sultan Shoal Lighthouse – West Jurong Anchorage. Ships changing their location within port limits are also required to report their new positions. Ships leaving should report their departure time prior to leaving.

Orders for Pilots will be declined to vessels in the anchorages which have not reported their positions.

USE OF ANCHORAGES FOR VESSELS ARRIVING FROM EAST AND WEST:

1. Vessels arriving from the East and requiring Health and/or Immigration Clearance must make use of the Eastern Immigration/Quarantine Anchorage.
2. Vessels arriving from the West and requiring Health and/or Immigration Clearance must make use of the Sultan Shoal Immigration/Quarantine Anchorage.
3. After Immigration/Quarantine Clearance, vessels arriving from the East are to make use of the appropriate Eastern Anchorage and vessels arriving from the West are to make use of the appropriate Western Anchorage.
4. Vessels that do not require to be cleared at the Immigration/Quarantine Anchorages (i.e. Radio Provisional Pratique/Advance Immigration Clearance) and require to proceed to an Anchorage/Berth, shall on arrival, proceed directly to the appropriate Eastern Anchorage if they arrive from the East or to the appropriate Western Anchorage if they arrive from the West.

N.E. Monsoon (Approximately December to March).

5. The use of the Eastern Immigration/Anchorage will cease.
6. Vessels arriving from the East are to make use of the Western Immigration/Quarantine Anchorage.
7. Vessels arriving from the West are to make use of the Sultan Shoal Immigration/Quarantine Anchorage.
8. After Immigration/Quarantine Clearance:—
   (a) Vessels have the option to work cargo in the Eastern or Western Anchorages.
   (b) The Western Working Anchorage is reserved exclusively for vessels working cargo or waiting to go alongside within 24 hours of arrival.
   (c) All other vessels not working cargo must proceed to their proper anchorage in the Eastern Anchorages.
9. Owners/Agents of vessels who are unable to comply with the requirements stated above due to draft and length restrictions or any other constraints are requested to refer to Port Operations for an alternative Anchorage for their vessels.

MAX. SIZE: Length, no restrictions. Breadth, no restrictions. Draft, Keppel Harbour 33 ft. at zero tide; Empire Dock 28 ft. at zero tide; Jurong Wharves being dredged to 38 ft. at zero tide.

Oil Installations: see "Tankers".

CLEARANCE: The Master of any vessel entering Singapore may apply for radio pratique to the Port Health Office through his local Agent, not less than 12 hours or more than 24 hours prior to arrival in Singapore (exceptions allowed).

All applications should be accompanied by answers to the Port Health Questionnaire.

Free Radio Pratique will not be granted in the following cases:

(a) Vessels with a case or suspected case of infectious disease on board.
(b) Vessels with a dead body on board.
(c) Vessel which has visited plague-infected ports during the current voyage.
(d) Passenger vessels, other than those approved by Public Health Officer.

The provisional pratique by radio is a quarantine clearance by the Port Health Officer on duty. The clearance permits a vessel to proceed directly to berths or working anchorages and begin normal business activities without the inspection of the Port Health Officer.

The granting of radio pratique clears the vessel only as far as the Port Health Officer is concerned, and it neither exempts the vessel from the requirements of other government agencies prior to commencing operations, nor a vessel from quarantine inspection and other control measures, subsequently deemed necessary by the Port Health Officer.

Vessels wishing to communicate with the Port Health Officer should do so on VHF Channel 14.

All ships other than gazetted mail ships, arriving within 5 days of departure from a smallpox infected port, or from a plague infected territory, should await health clearance at Quarantine Anchorage displaying appropriate signals.

All ships with suspected infectious disease on board should radio information to Port Health Officer and await clearance at Quarantine Anchorages. All vessels from infected ports upon arrival are required to anchor in Eastern Quarantine Anchorage or Sultan Shoal Quarantine Anchorage, where appropriate (alternatively Western Quarantine Anchorage during the N.E. monsoon, approx. December to March), unless Health and Immigration exemption have previously been granted. Vessels from non-infected ports can obtain free pratique. Vessels from infected ports must fly "Q" flag for Port Health. Vessels must also fly pennants 2 over 5 (alternatively 3 over 4 when there are passengers aboard) for immigration.

Corresponding night lights red over white for Port Health and 2 green for Immigration. Once vessel has been cleared by Port Health and/or Immigration she must proceed to appropriate berth/anchorage. On sailing, unless exemption granted, vessels must return to Principal Anchorage for Immigration Clearance; 2 hours notice required of departure.

The Port Master, Port of Singapore Authority has issued the following regulations regarding vessels requesting Immigration and Port Health Clearance:

(1) All Masters, Owners and Agents are reminded that vessels when requesting Immigration and Port Health Clearance must anchor in the designated Immigration and Quarantine Anchorage and exhibit the appropriate signals.

(2) The Senior Health Officer has advised that delays have occurred due to ships not anchoringg at the designated anchorage or not displaying quarantine signals.

(3) Failure to comply with the above may result in action being taken against the vessels.

RADIO: Medium range (HF) telephone service is available continuously and normally provides satisfactory communication up to a range of about 800 miles. Ships wishing to contact Singapore radio may do so on any of the following carrier frequencies:

Station	*Call sign*	*Frequency kHz Coast*	*Frequency kHz Ship*	*Hours*	*Remarks*
Singapore Radio	9VG4	2182	2182	24	Call, reply and Safety
	9VG40	4434.9	4136.9		
	9VG8	6204	6204		
	9VG5	2760	2527	24	Working
	9VG38	4364.7	4066.1		
	9VG43	8751.2	8217.2		

After establishing contact, the call will be booked and both stations will change to one of the following Frequencies prior to connection with the Subscriber:

Station	*Call sign*	*Frequency kHz Coast*	*Frequency kHz Ship*
Singapore Radio	9VG39	4377.4	4078.8
	9VG44	8757.6	8223.6
	9VG45	8799.2	8265.2

VHF:

Station	*Hours of watch*	*Channel*	*Functions*
Singapore Radio	24	16	Distress, Safety and Calling Frequency
Singapore Port Operations	24	12	Reporting ETA's, anchored positions, departures, etc.
Singapore Port Operations	24	20	Pilotage Services other than East Johore Straits
Bukom Operations	24	19	Berthing/unberthing at Pulau Bukom and Shell SBM
Esso Operations	24	5	Berthing/unberthing at Pulau Ayer Chawan and Esso SBM
Jurong Control	24	21	Berthing/unberthing in Jurong wharves
Sembawang Control	24	21	Pilotage services and berthing/unberthing in East Johore Straits within Singapore port limits
Immigration/ Port Health	24	14	Immigration & Port Health Clearances
Waterboats	24	18	Supply of fresh water to vessels at anchor
Public Correspondence	24	24	For connection to Singapore Telephone Exchange
Public Correspondence	24	25	For connection to Singapore Telephone Exchange
Public Correspondence	24	26	For connection to Singapore Telephone Exchange
Public Correspondence	24	28	For connection to Singapore Telephone Exchange

TUGS: PSA operates 13 tugs – 3 of 3,000 b.h.p., 3 of 1,000 b.h.p., 2 of 1,200 b.h.p., 4 of 2,500 b.h.p. and 1 of 650 b.h.p. Shell operates 2 tugs approximately 1,500 b.h.p. A number of privately owned salvage tugs make the port their base.

Tugs join anywhere in port limits by pre-arrangement with Pilots. Normally ship's line used. All PSA and Shell tugs carry tow ropes for use if required. PSA charge for use of tow rope.

BERTHING: Vessel's Agents should submit to Authority a Schedule "A" (Application for Berth) giving overall length, maximum draft alongside, ETA and ETD of, and Schedule "B" listing out dangerous cargo on board vessel at least 48 hours before berth required.

CARGO HANDLING FACILITIES: *Keppel Wharves:* Vessels working only general cargo will normally be berthed at the Keppel Wharves. This is the largest of the six gateways of Port of Singapore Authority, having marginal wharves of 4.8 km. that are capable of accommodating 30 vessels at one time. There are well-ventilated transit sheds and warehouses totalling 158,472 sq.m., and 83,336 sq.m. of concrete hardstanding for open storage.

Container Terminal: Length of 5 main berths 1,554 m., depth 13.4 m. at zero tide. Able to handle 5 third-generation vessels at one time. 10 container quay cranes of 35 tonnes lifting capacity available. Feeder berth length 213 m., draft 9.16 m. for coastal vessels and a cross berth of length 213 m., draft 10.4 m. There are also three freight stations covering an area of 22,100 sq.m. for consolidation and unstuffing of containers. The stacking yard of approximately 14 hectares can accommodate 14,000 containers (20 ft. equivalents) stacked 2 to 5 high.

Bunkering facilities available. Bunker fuel pumped at the rate of 1,000 tonnes per hour through 18 in. (4.6 dm.) diameter mains. There are 11 outlets along the quay with 10 in. (2.5 dm.) tap-offs. Marine diesel and fresh water also available.

Sembawang Wharves: The Port of Singapore Authority operates 5 berths, at the Sembawang Wharves, situated North of Singapore. The length of the berths totals 807.72 m. with minimum depth of 10.4 m. at zero tide covered storage space available totals 51,100 sq.m. It is geared towards handling of low-value, high volume homogeneous cargoes like bulk sawn timber and logs.

Jurong Port: The Port is a bulk-handling facility to serve the Jurong Industrial Estate. The marginal wharves of 1,792 m. with draft 10.92 m. can accommodate 10 ocean going vessels. In addition, there is a 172 m. wharf with minimum depth of 3.1 m. for coastal shipping. There are 75,723 sq.m. of covered storage and 226,568 sq.m. of open storage space.

The terminal has facilities for the discharge of grain (by elevator), sugar, fertilizers, cement, clinker, sulphur, etc. Shore bulk-handling cranes are used.

The equipment includes a kangaroo crane conveyor, unloading capacity of 304 tonnes per hour.

Two gantry type unloader cranes each with capacity of 457 tonnes per hour.

An iron ore hopper/conveyor loading system with a capacity of 304 tonnes per hour.

Grain silos with capacities up to 20,320 tonnes (20,000 tons).

Bulk grain suction – conveyor unloading system with discharge rate of 203 tonnes per hour and loading rate of 101 tonnes per hour.

Pasir Panjang Wharves: 1,361 m. of wharves with minimum depth of 2.3 m. – 6.4 m. which can accommodate 21 lighters, 6 LASH (Lighters-Aboard Ship) barges, and 7 coastal vessels at any one time. There are 4 large modern transit sheds covering 38,000 sq.m., 1 back up shed 22,296 sq. m., 7 warehouses 1,120,401 sq. m. (of these 48,000 sq. m. are outside the free trade zone) and some 240,000 sq.m. of covered storage space.

Telok Ayer Wharves: This gateway caters for coastal vessels and lighters/barges. There is a total of 744 m. of wharves for lighters and coastal vessels. With land reclamation carrying on at this place, 5 new berths can accommodate vessels with a draft of up to 6.4 m.

STEVEDORES: Labour should be ordered by 0900 hrs. for 2nd shift (1500 to 2300 hrs.) on same day and by 1300 hrs. for 1st shift (0700 to 1500 hrs.) for next day, by 1100 hrs. for 3rd shift (2300 to 0500 hrs.) on same day.

No work is performed during meal hours, 1100–1200 hrs. and 1830–1930 hrs.

MEDICAL: When infectious disease not suspected, permission will be granted by Port Health Officer to Agent to take doctor on board and remove the case, if necessary, to hospital. Preferably as much notice as possible. Several hospitals, General hospital, Gleneagles, Mt. Alvernia to name a few. Cholera, smallpox, plague, etc., are not endemic in Singapore.

FIRE PRECAUTIONS: Normal precautions with respect to cargo vessels, vessels under repair, etc. Fire boats available. Oil companies apply own regulations at installations.

GANGWAY/DECK WATCHMEN: Recommended, particularly in Roads. Agents normally arrange. Cost varies.

OPENING/CLOSING HATCHES: Conventional hatches by stevedores. Mechanical hatches usually by ship's crew.

CERTIFICATES: If dangerous drugs on board, an export authorisation from country of origin and an import authorisation from country to which drugs being conveyed should be available for sighting and endorsement.

All vessels	Certificate of Registry or Tonnage Certificate. International Load-line Certificate or equivalent.
Passenger ships	Passenger Safety Certificate issued under international Convention for Safety of Life at Sea 1960 or the Simia Rules 1931.
Cargo ships	Safety Equipment Certificate (if over 500 tons gross) or equivalent. Radiotelegraphy Certificate or Radiotelephony Certificate whichever is applicable.

CUSTOMS ALLOWANCE: Tobacco: for crew and transit adult passengers. First day of arrival 50 cigarettes or 15 cigars or other tobacco 60 gms.; and for each subsequent day to the maximum of 7 days. 25 cigarettes or 7 cigars or other tobacco 30 gms.

Wines: 1 bottle per day to maximum of 8 days. Spirits: 0.875 reputed quart (in opened bottles) on first day of arrival and 0.125

reputed quart per day for rest of 7 days. Malt liquors: 1 bottle (beer, stout, etc.).

CARGO GEAR: Possession of valid test certificates. At PSA wharves, if gear appears faulty, an inspection by competent Port Officer may be required.

TANKERS: Bunkering and discharge facilities available at Eastern and Western petroleum anchorages or installations at Pulau Bukom. Pulau Ayer Chawan, Tanjong Penjuru, Tanjong Berlayer, Jurong and Pulau Merlimau.

PSA operates a Slop and Reception Treatment Centre at Pulau Sebarok with facilities for the discharge of slops from crude oil, black oil, white oil, tank cleaning and ballast water.

Smoking not permitted during period tanker alongside PSA wharves. Grades permitted for discharge along PSA wharves: (a) marine diesel oil, (b) fuel oil.

Shell

Pulau Bukom – 10 berths and conventional buoy mooring.

Berth	*Draft* (m.)	*Max. length* (m.)	*Max. displacement* (tons)	*Remarks*
1	9.75	173.7	33,000	Continuous Jetty
2	9.75	91.4	33,000	
3	10.95	82.3	33,000	
4	12.19	189.0	43,000	
5	12.50	193.6	45,000	
6	14.63	243.8	92,000	
7	12.34	185.9	65,000	
8	12.95	230.1	65,000	
9	13.10	198.1	33,000	
10	15.54	265.0	84,000	Min. length acceptable 172.2 m.
SBM	22.36	—	352,990	

Esso

Refinery on an island Pulau Ayer Chawan 2.4 km. South of Jurong Industrial Complex. Refining capacity of 231,000 barrels per day. Lubricant plant 5,000 barrels per day. The jetty has an overall length of 982.1 m. and consists of 4 loading and bunkering berths.

Berth 1	length 82.4 m.	draft 7.6 m.
Berth 2	length 189.1 m.	draft 10.7 m.
Berth 3	length 225.7 m.	draft 12.8 m.
Berth 4	length 250.1 m.	draft 15.9 m.

Caltex

Operates berths (No. 1 and No. 2) at Tanjong Penjuru which can accommodate vessels alongside up to 133.71 m. max. draft. No. 1 Berth (4 breasting dolphins) capable of handling vessels of any size. No. 2 Berth (4 breasting dolphins) can handle any vessels exceeding 91.4 m. flat sides, up to 32,000 tons displacement and length not exceeding 182.8 m.

Mobil

Provides 4 berths 713 m. long for vessels up to 85,000 d.w.t.

Berth 1	14.3 m. LWOST
Berth 2	12.8 m. LWOST
Berth 3	6.7 m. LWOST
Berth 4	6.1 m. LWOST

B.P. Refinery

Refinery with 3 berths situated at Pasir Panjang. Small jetty inside harbour known as Jetty No. 2 can receive small vessels up to 1,000 tonnes as water depth only 6.1 m. below ACD.

No. 1 Jetty at S.W. side of Tanjong Berlayer can accommodate vessels up to 33,000 tons at off-shore mooring where dredged channel 10.97 m. below ACD. Berthing cannot be effected for 43 days of year due strong tidal currents.

At Jetty No. 1A which is Northwards extension from Jetty No. 1 trunkway, vessels up to 5,000 tonnes can be berthed; water depth 7.62 m. below ACD. Simultaneous mooring of vessels at Jetties No. 1 and 1A not allowed as floating hose used to connect Jetty No. 1 to ship at mooring buoys.

Singapore Petroleum

Provides 3 berths for bunkering and other services on Pulau Merlimau, an island off the S.W. coast of Singapore. The marine berth can accommodate vessels up to 90,000 d.w.t. and 15.5 m. draft, refining capacity 65,000 barrels per day.

Gatx Terminals: Vessels berth at marine trestle 1,400 ft. (427 m.) offshore. One berth for vessels up to 85,000 d.w.t. and 1 for vessels of 5,000 d.w.t. 32 operating pipe-lines serve the main berth. The terminal handles chemical, petrochemical and vegetable oils. Total capacity 287,910 barrels in 55 tanks.

Docklines 2× 75 mm. dia.
1×100 mm. dia.
26×150 mm. dia.
3×200 mm. dia.

DENSITY: Usually between 1019 and 1022 unaffected by tide or temperature variations. Variation due to periodic heavy run-off of rain water.

FRESH WATER: Fresh water available at any point of PSA's wharves. PSA also has a fleet of 10 waterboats to supply fresh water to ships anchored within the port limits.

FUEL: All grades available alongside PSA wharves and ex installation, otherwise by barge. Marine diesel oil 40 sec. to 100 sec. Heavy fuel oil 700 sec. to 1,000 sec. Thinned fuel 433 sec. to 450 sec. Blended fuel 200 sec. to 430 sec.

IDENTIFICATION CARDS: Sect. 22 (1) (c) of Ordinance provides for issue of Seamen's Identification Card as set out in First Schedule to the Immigration Regs. 1966, but rarely issued nowadays. Normally accept passports, discharge books or any identification cards issued by Masters of vessels for purpose of granting shore leave to Crew members, provided these documents sufficiently identify person concerned

Gate Passes issued against crew list at wharves and installations. No passes required from roads, although some form of identification advisable.

CONSULS: Consuls, Embassies and High Commissions. Arab Republic of Egypt, Argentina, Australia, Austria, Bangladesh, Belgium, Brazil, Bulgaria, Burma, Canada, Czechoslovakia, Denmark, El Salvador, Finland, France, Democratic Republic of Germany, Federal Republic of Germany, Great Britain, Greece, Hungary, India, Indonesia, Iran, Ireland, Israel, Italy, Japan, Democratic People's Republic of Korea, Republic of Korea, Malaysia, Nepal, Netherlands, New Zealand, Norway, Pakistan, Philippines, Poland, Romania, Spain, Sri Lanka, Sweden, Switzerland, Thailand, Trinidad and Tobago, Turkey, Union of Soviet Socialist Republic, USA, Yugoslavia.

REPAIRS: All types of repairs (hull, engine and electrical including navigational aids) carried out. Facilities also available for repairs out afloat while vessel in anchorages.

DRY DOCKS: Several shipyards offering building, repairing and engineering facilities, for example:

Jurong: 2 dry docks: No. 1, length 270 m.; breadth, 40 m.; capacity 90,000 tons d.w.t. No. 2 length 350 m.; breadth 56 m.; capacity 300,000 tons d.w.t. 1 floating dock length 86 m.; breadth 18 m.; lifting capacities 2,000 tons.

Keppel Shipyard: 7 dry docks, the largest of which (301 m.×52 m×10.1 m. depth) can accommodate vessels up to 120,000 d.w.t.

Sembawang Shipyard: 400,000 d.w.t. super graving dock, 100,000 d.w.t. graving dock, 4 floating docks from 5,000 d.w.t. to 30,000 d.w.t. capacities. 1,330 m. of repair berth with 12 m. of water.

REPATRIATION: Ships' Agents responsible for repatriating seamen. Mercantile Marine Office undertakes repatriation of distressed British seamen on behalf of Board of Trade, United Kingdom, whenever necessary. Seamen who hold proper documents which ensure entry into their countries of origin, citizenship and destination are normally granted Special Passes after discharge for purpose of repatriation.

AIRPORT: 11.2 km. from city. Regular and frequent services to all parts of the world.

TIME: Singapore time, GMT plus 7.5 hours. No seasonal change.

HOLIDAYS: Work can be arranged on all 11 Public Holidays. New Year's Day; Chinese New Year; Hari Raya Haji; Good Friday; Labour Day (1st May); Vesak Day; National Day (9th August); Deepavali; Hari Raya Puasa; Christmas Day.

POLICE/AMBULANCE/FIRE: City Police 999; Fire/Ambulance only, 328111; Flag signal: CB3. VHF Channels 12 or 16. PSA Police 2712211 ext. 2222; Fire ext. 2209 or ext. 2333; Ambulance 2712211.

Police assistance at anchorage:

For your information we quote the contents of Port Circular No. 28/73 issued by the Port of Singapore Authority:

(1) In circumstances arising on board ships at anchor within port limits which require the assistance of Marine Police, ships suitably equipped with VHF radio-telephony in the 156-174 mHz frequency band are to communicate this requirement on Channel 21 to "Marine Police" which maintains a continuous listening watch.

(2) In order to facilitate and arrange for police assistance to the ship, the following information shall be transmitted by the ship when radio contact has been established on Channel 12:
(a) Name of ship.
(b) Location (from a reference point).
(c) Brief description of incident.

(3) The ship making this request for police assistance shall also as soon as possible hoist up the appropriate flag signals by day and light signals by night. Day signal: International Code Hoist "CB3". Night signal: Red-Red-White (Red at top).

(4) The ship is required to sound on her whistle or siren at intervals of about 1 minute 3 long blasts so that the police on patrol duties and other ships in the vicinity are alerted.

(5) Adherence to the procedures described in the above will enable assistance being given to the ships in the quickest possible manner.

TELEPHONES: Available on board vessel at PSA wharves only.

GENERAL: Master of any vessel in territorial waters of Singapore shall obey any signal from a preventive vessel and any instruction from officers of Customs. Customs officers shall have free access to any part of vessel and have powers to mark, lock or seal any dutiable goods on import including sea stores.

SERVICES: Following additional services available: Cleaning and preparing ship's tanks. Cleaning, scaling and painting. Insulation. Interior decorating and furnishing. Refrigeration and air-conditioning. Chemical cleaning of boilers, etc. SCAMP underwater cleaning service.

Services of following Classification Societies available: Lloyds Register of Shipping. Det. Norske Veritas. American Bureau of Shipping. Bureau Veritas. Nippon Kaiji Kyokai. Germanischer Lloyd. Polski Register Stratkow. China Corporation Register of Shipping.

Compass adjusting and DF Calibration. Radar and Radio servicing depots.

SHORE LEAVE: No restriction on crews landing after Immigration and Health formalities have been satisfactorily completed. With rare exception (e.g. CPG Crew), all *bona fide* crew of a vessel allowed shore leave on strength of their passports, discharge books or identification cards.

The following circular was issued in May 1973 by the Singapore Port Authority.

"In line with the Government's decision that action should be taken to deal with the 'long-hair' problem as part of a campaign against undesirable alien influences, the Port of Singapore Authority would be most grateful for your co-operation in implementing this decision by advising all your employees, including ships' officers and Crew members, wishing to come ashore to be more tidy in their general appearance.

"To assist you to decide whether an individual's hair is long, the following definition of long hair may be used as a guide:

(i) Hair reaching below an ordinary shirt collar;
(ii) Hair covering the ears;
(iii) Hair falling across the forehead and touching the eyelashes."

POLLUTION: No oil or mixture containing oil shall be discharged into Singapore waters from any vessel. The Master or person in charge of the vessel committing such an offence shall be liable on conviction to a fine not less than 500 dollars and not exceeding 500,000 dollars or to imprisonment for a term not exceeding 2 years or to both such fine and imprisonment.

No refuse, garbage, waste matter, substance of a dangerous or obnoxious nature or trade effluent is to be discharged from any vessel into Singapore waters. The Master or the person in charge of the vessel committing such an offence shall be liable on conviction to a fine not exceeding 10,000 dollars or to imprisonment for a term not exceeding 2 years or to both such fine and imprisonment.

Any person who puts, throws, cast or deposits into Singapore waters, or causes to be put, thrown, cast or deposited there into, any oil mixture containing oil, refuse, garbage, waste matter, carcase, substance of a dangerous or obnoxious nature, or trade effluent, shall be guilty of an offence and shall be liable on conviction to a fine not exceeding 10,000 dollars or to imprisonment for a term not exceeding 2 years or both such fine and imprisonment.

If any oil or mixture containing oil is discharged into Singapore waters:

(a) for the purpose of securing the safety of the vessel or of preventing damage to the vessel or her cargo, or of saving life; or

(b) is found to be escaping, or to have escaped into Singapore waters from a vessel in consequence of damage to the vessel, or by reason of leakage, the Master or the person in charge of the vessel shall report the occurrences to the Director of Marine and the Port Master. Failure to do so shall be an offence and shall be liable on conviction to a fine not exceeding 5,000 dollars.

Slop Reception: The P.S.A. Slop Reception and Treatment Centre at Palau Sebarok has a total tank capacity of 62,000 cu.m. (395,000 barrels).

Berthing facilities consist of 4 piers – Piers 1 and 2, Sludge Pier and Utility Pier.

The depths of water alongside the piers are 7.6 m. (25 ft.), 12.8 m. (42 ft.) and 9.7 m. (32 ft.) at LWOST respectively.

The Centre can accommodate vessels up to an overall length of 264 m. and a displacement of 45,800 tonnes

The average rate of discharge to the storage tanks through the Centre's 0.3 m. (12 in.) pipe-lines is 500 tonnes (490.2 tons) per hour at an operational pressure of 10.6 kg./sq.cm. (150 p.s.i.).

Communications: VHF Station Channel 21. Mobile Radiotelephone – Kapal 57.

Safety and security at the island is well provided and maintained by both the Authority's Police Force and Fire Brigade.

DELAYS: Normally none. Occasional congestion due to prolonged rainy weather or other abnormal conditions.

AUTHORITY: Port of Singapore Authority (PSA).

AGENT: Intrasea (Pte) Ltd., Faber House, 234E Orchard Road, Singapore 9. Tel. 2352611 Cables: Freight Singapore. Telex: RS 24010.

NOTES

Please also advise Shipping Guides Ltd.

Society Islands

BORA BORA (Vaitape): 16.31 S. 151.45 W.

DOCUMENTS: All vessels arriving in French Polynesia must first call for clearance at Papeete, or at Uturoa, or at Taiohae. See "Papeete" for documents required.

PILOTAGE: There is no pilotage station at Bora Bora; a Pilot will be provided at Papeete. Vessels are requested to advise their Agents at least 15 days before arrival of their ETA, length and draft of ship. In addition, Masters should confirm their ETA to the Port Captain of Papeete at least 3 days before arrival. Telegraphic address is Capitaine de Port, Papeete.

ANCHORAGE: Vessels may anchor in the port roads in depths of 34-21 m. Good holding ground in sand and coral.

RESTRICTIONS: Night pilotage is impracticable due to the absence of lighted navigation marks.

MAX. SIZE: Lengths 220 m., beam 30 m., draft 9.60 m.

HEALTH: Vessel should ask for free pratique by radio message to Sante Maritime Papeete, via coast station Mahina. This message to be sent 24 hours before arrival.

RADIO: Mahina Radio, call sign FJA, operating 24 hours a day on 500, 2,182 and 8,230 Khz.

TUGS: No tugs available at Bora Bora.

BERTHING: One quay, (Quai de Farepiti) 132 m. length, situated in Faanui Bay. Depth alongside 7.30 m. This quay was constructed during the 2nd World War and is in poor condition, only used by small warships and yachts. One other quay (Quai de Vaitape) 40 m. long and with depth alongside 4 m. Situated at Vaitape. Used by barges.

MEDICAL: No doctor available, but there is a local infirmary.

FRESH WATER: Not available.

FUEL: Not available.

CUSTOMS ALLOWANCE: No restrictions for crew members, but all tobacco and alcohol must be declared. Crew men going ashore may not take more than 2 packets of cigarettes.

AIRPORT: Situated 7 kms. from Vaitape, only inter-island services.

TIME: GMT minus 10 hours. No change during the year.

HOLIDAYS: See "Papeete".

SHORE LEAVE: Allowed.

AUTHORITY: Chef de Post, Bora Bora.

PAPEETE: 17.33 S. 149.34 W. (See Plan Book)

DOCUMENTS:

Required by Port Health:
- Maritime Declaration of Health (form provided by the Pilot).

Required by Police:
- Crew List.
- List of Passengers Disembarking.
- List of Passengers in Transit.

Required by Customs (2 copies of each):
- Manifest of Cargo for Discharge.
- Provisions List.
- Mail List.
- Crew Personal Effect List.
- Bonded Stores List.
- Ship's Spares List.
- Crew List.
- List of Passengers Disembarking.
- List of Passengers in Transit.
- List of Animals Disembarking.
- List of Animals in Transit.
- Complete Cargo Manifest.

Required by Port Captain:
- Entry Declaration (form supplied on arrival).
- Crew List.
- List of Passengers Disembarking.
- List of Passengers In Transit.

PILOTAGE: Vessels are requested to advise their Agents at least 3 days before arrival giving their ETA, length and draft of the ship, amount of cargo for discharge and any other requirements. In addition, Masters must give their ETA 24 hours before arrival to Capitaine de Port, Papeete. Pilot station and pilot launches are equipped with VHF and may be contacted on Channel 16 when within 30 miles. Pilot launches have grey painted hull with a white band, with wheelhouse on the fore part. The pilot flag is described as the colours of code flag "W" upside-down. International code flag signals may be used to call Pilot. Pilot boards about 1.5 miles from the entrance channel. There is no anchorage outside the port for ships awaiting a Pilot.

Pilotage is effected from 0500 to 2200 hrs. for entering vessels. For departing vessels, pilotage available up to 2400 hrs.

ANCHORAGE: Vessels up to 170 metres length can anchor in the port roads in depths of 18-25 metres. Good holding ground in mud.

MAX. SIZE: Length 250 m., beam 32 m., draft 10.30 m. The Q.E. II, length 294 m. entered and docked in February 1978.

HEALTH: Vessels should ask for free pratique by radio to Sante Maritime Papeete, via Coast Station Mahina Radio. This message should be sent 24 hours before arrival. Pratique is automatic for vessels coming from another Polynesian port.

RADIO: Mahina Radio, call sign FJA, operating 24 hours per day on 500, 2,182 and 8,281.8 kHz.

G.M.T. 01-18 hrs. —	8.461 kHz	FJA 8	A1	W/T
G.M.T. 07-33 hrs. —	17.040,8 kHz	FLA26	A1	W/T
G.M.T. 04-33 hrs. —	8.461 kHz	FJA 8	A1	W/T
G.M.T. 05-03 hrs. —	17.040,8 kHz	FJA26	A1	W/T
G.M.T. 09-03 hrs. —	4.298 kHz	FJA41	A1	W/T
G.M.T. 09-33 hrs. —	8.461 kHz	FJA 8	A1	W/T
G.M.T. 13-33 hrs. —	8.461 kHz	FJA 8	A1	W/T
G.M.T. 17-33 hrs. —	4.298 kHz	FJA41	A1	W/T
G.M.T. 20-18 hrs. —	8.461 kHz	FJA 8	A1	W/T
G.M.T. 20-48 hrs. —	17.040,8 kHz	FJA26	A1	W/T

VHF: The Port Captain's Office is equipped with VHF. Watches are kept on Channel 16 when a ship is expected.

TUGS: Tugs join ships as soon as they are in the entrance channel. Generally, tow-lines are not required, as tugs push the vessels only. There are three tugs available up to 1,200 h.p. belonging to the Port Authority, and in addition, there are two naval tugs up to 700 h.p. which may assist if required.

BERTHING: Passenger Quay: 233 m. length, two berths, depth alongside 9 m.

Cargo Quay: 450 m. length, depth alongside 10.50 m.

STEVEDORES: Cargo information should be confirmed to the Agents with ETA 48 hours before arrival.

MEDICAL: Advance notice required if medical attendance needed on board. Two hospitals available. Passengers disembarking must present a valid vaccination certificate.

TANKERS: One tanker berth, 105 m. long. Max. allowed draft 9.60 m. Discharging hoses are: Mobil Oil 8 in., Standard Oil 6 in.

FRESH WATER: Available from pipe-lines on all quays. Loading rate is 50 t.p.h. at passenger and cargo quays and 30 t.p.h. at the tanker berth.

FUEL: Diesel available subject to 1 week's notice.

DEVELOPMENTS: Construction of a new quay for passenger vessels up to 300 m. length.

Dredging harbour entrance to widen channel to 160 m. width 12.50 m. depth.

A quay is to be constructed in the fishing harbour, length 100 m., depth 6 m.

A Container Quay is to be constructed, length 200 m., depth 12 m. (1977-78).

GANGWAY/DECK WATCHMEN: Services of shore watchmen are necessary.

OPENING/CLOSING HATCHES: Hatches opened and closed by crew if they are of mechanical type, otherwise the stevedores will perform this operation.

CUSTOMS ALLOWANCE: No restrictions for crew members but all tobacco and alcohol must be declared. Crew members going ashore must not take more than two packets of cigarettes. Passengers disembarking may take 200 cigarettes or 50 cigars or 400 grammes of tobacco and one bottle of alcohol.

CONSULS: The following countries maintain representatives at Papeete:

Austria
Belgium
Chile
Denmark
Italy
Finland
Netherlands
Norway
Sweden

REPAIRS: Woodwork, electrical and welding repairs can be effected. There are 2 floating docks for vessels up to 3,800 tons.

REPATRIATION: Can be effected.

AIRPORT: Tahiti — Faaa Airport is situated 6 kms. from the port. Regular international flights.

HOLIDAYS: 1st January, Easter Monday, 1st May, Ascension Day, Whit Monday, 14th July, 15th August, 1st November, 11th November, 25th December. No work is carried out on Sundays or on 1st May. All other holidays can be worked on double overtime rates.

TIME: GMT minus 10 hours. No alterations during the year.

POLICE/FIRE/AMBULANCE: Police 17; Fire 18; Ambulance 2 96 74.

TELEPHONES: Can be installed on board vessels at all quays.

SHORE LEAVE: Allowed without restriction.

AUTHORITY: Capitaine de Port.

NOTES

Please also advise Shipping Guides Ltd.

Solomon Islands

GIZO: 08.05 S. 156.52 E

Gizo is the copra and cocoa receiving centre for Western Solomons. Situated on Gizo Island West of New Georgia. Entrance to harbour is beaconed and a jetty with depth alongside of 9 ft. Sheltered anchorage available in 16 fathoms. The British Solomons Trading Company Ltd. provides stevedores and conducts a lighterage handling and warehousing service to importers and Exporters.

HONIARA: 09.25 S. 159.58 E. (See Plan Book)

DOCUMENTS:

Special Documents
Store List, Form C1.
Crew's Store List, Form C2.
List of Unmanifested Cargo, Form C3.
Ship's Report Inward, Form C4.
Entry Outwards/Content Ship, Form C13.

Legalised Documents
None.

Advance Documents
None.

Landing Cards
Finally landing passengers need special landing card

Health Officer
1 Transit Passenger Manifest.
1 Landing Passenger Manifest.
1 Crew List.
1 Maritime Declaration of Health.
1 Rhinocerus Beetle Free Certificate from Suva.
Deratisation Certificate.
Health Certificate.

Immigration
1 Transit Passenger Manifest.
1 Landing Passenger Manifest.
1 Crew List.

Customs
1 Transit Passenger Manifest.
1 Landing Passenger Manifest.
1 Crew List.
2 Store Lists, Form C1.
2 Crew Store Lists, Form C2.
2 Ship's Reports Inwards, Form C4.
2 Lists of Unmanifested Cargo, Form C3.
2 Entry Outwards/Content Ship, Form C13.

Agents
1 Transit Passenger Manifest.
1 Landing Passenger Manifest.
1 Crew List.

PILOTAGE: 24 hours notice ETA stating number of passengers, dangerous cargo, etc., to Harbour Master, Honiara, via Honiara Radio. Usual signals. Pilot boards from launch about 0.75 mile N.E. Pelope Shoal. Vessels normally berthed port side to. Pilot uses port gangway in calm weather.

ANCHORAGES: East of Port Main Leading Lights. F1. white and fixed green, in about 20 fathoms; coral bottom.

Local boats are available for transporting crew from anchorage to the shore. The landing stage is at Joanna Jetty on the East side of the main pier at Point Cruz. Height above water level is 2 ft. at high tide and 4 ft. at low tide.

APPROACHES: Approaches free from dangers provided vessels keep at least 2 cables off Point Cruz Beacon, identified by quick flashing red light. On foreshore in front of Shell Oil Storage Tanks is beacon with fixed green light, and above on Vavaya Ridge is white light flashes every 5 seconds from Tower on radio station building. When in line these 2 lights give correct approach to anchorage in 20 fathoms on, or East of, the line. Prevailing winds during S.E. season blow from N.E'ly direction sometimes reaching force 4 to 5 in early afternoon. During N.W. season direction and force variable generally between North and West up to force 4 and occasionally force 5.

RESTRICTIONS: Berthing in daylight hours only - departure any time.

MAX. SIZE: New Wharf, up to 650 ft. long and max. 29 ft. draft. Old Wharf, up to 200 ft. long and max. 13 ft. draft. Tankers, mooring at buoys, 600 ft. long and 27 ft. 6 in. draft.

HEALTH: Pratique can be obtained by radio. Cable Port Health. Suspect vessels should inform Health Authorities and Harbour Master by radio for doctor to board on arrival.

Cable to Quarantine Officer Honiara between 12 and 4 hours before arrival the following message: "Request Radio pratique negative answers all health questions maritime declaration of health Master." Normally, the P & T Radio Officer may grant pratique immediately whilst he is in radio contact with the ship. After arrival the Health Officer will check for rhinocerus beetle and will clear.

RADIO: Radio Honiara VQJ (Vee Kiu Jay). Watch continuous. kHz 6204, kHz 2182, kc/s 500. GMT Schedule 0020–0030 transmits 11560 kHz receives 8 or 16 mHz.

TUGS: There is a small 100 h.p. tugboat assisting with mooring when necessary.

BERTHING: At Point Cruz, berth length 235 ft., depth alongside 30 ft. Vessel berths port side alongside.

STEVEDORES: At least 24 hours notice, usually 3 gangs, indicate any extra gangs required. To facilitate quick turn around advisable have cargo in middle holds evenly distributed not at extreme end or massed in one hold only.

MEDICAL: Notice should be given in advance if medical attendance required on board. Smallpox vaccination required by all arriving on ship. Inoculations available at clinic on Fridays only. Limited hospital facilities available.

Cholera: required if arriving from infected area. Vaccination certificates are checked individually by those passengers permanently disembarking.

For all other passengers and the crew ship's doctor must provide a statement advising that all passengers and crew comply with the health regulation and vaccinations required.

In case some passengers have for health reasons not been vaccinated, a letter from their doctor giving reason why no vaccination given must be produced. Passengers will be allowed to go ashore.

Central Hospital, tel. 09–61.
Emergency and Ambulance, tel. 09–33
Doctors, tel. 09–44
Dentist, tel. 09–43

All medical facilities are provided from the Hospital. One private doctor available: Dr. M. Strickland, tel. 770.

TANKERS: Tanker buoys, 8 in. pipe-line, max. draft 32 ft. New Wharf, 4 in. pipe-line, max. draft 27 ft. 6 in. Old Wharf, 4 in. pipe-line, (ADO), max. draft 13 ft.

DENSITY/TIDE: Approx. 1025. Tidal range about 3 ft.

FRESH WATER: At wharf by hoses. 40 t.p.h.

FUEL: Diesel and gas oil available. 48 hours notice, butane gas.

FIRE PRECAUTIONS: Normal fire precautions, with gang standing by with fire pump.

GANGWAY/DECK WATCHMEN: Watchmen to be recommended. Customs provide a preventive office for duty at a charge.

OPENING/CLOSING HATCHES: Stevedores assist crew. Crew to rig gear.

CERTIFICATES: Certificate of Registry.

CUSTOM ALLOWANCE: 200 cigarettes or 0.5 lb. tobacco per crew member. 3 quart bottles of beer per crew member.

IDENTIFICATION CARDS: Required.

CONSULS: Australian.

REPAIRS: Limited facilities only.

DRY DOCKS: Nil.

REPATRIATION: Facilities available.

AIRPORT: Situated approximately 10 miles from the wharf. Air New Guinea have 2 flights per week from Sydney via New Guinea, and Air Pacific have 2 flights a week from Suva via New Hebrides.

TIME: GMT plus 11 hours all year round.

HOLIDAYS: Cargo work can be arranged on all holidays except Christmas Day and Easter period.

POLICE/AMBULANCE/FIRE: Emergency phone numbers: Police 666; Ambulance 933; Fire 299.

SERVICES: Labour can be hired for assistance with painting and cleaning. Other services not normally available. 24 hours notice required.

SHORE LEAVE: Permitted.

VISAS: Transit passengers: not required. Disembarking passengers: require visa for a stay over 48 hours. Visa can be obtained from nearest British Consul.

LANDING CARDS: Only permanently disembarking passengers need special Landing Cards which can be obtained from Immigration Officer on arrival.

WEATHER: Cyclone season December to April, winds N.W. to variable, strength 0–5. From April to November winds are from N.E., strength 4–5.

DEVELOPMENTS: The deep-water berth will be extended by 50 m. shorewards. Work will commence mid-1979.

DELAYS: Nil, except when other ships being worked.

AUTHORITY: Harbour Master, Soloman Islands Ports Authority.

AGENT: Sullivans (Soloman Islands) Ltd., G.P.O. Box 3, Honiara, Soloman Islands. Tel: 644/645. Cables: CHASULL.

YANDINA: 09.04 S. 159.14 E.

Yandina is situated in Russell Islands and is copra export port for Lever's Pacific Plantations Pty Ltd. A concrete and steel wharf on South side of entrance with length 53.34 m. and minimum depth alongside 6.0 m.

Sheltered anchorage for vessels of up to 500 ft. in length, available in Renard Sound. Lever's Pacific Plantations Pty Ltd. provide stevedores and conduct handling and warehousing service to importers and exporters.

Somali Democratic Republic

BERBERA: 10.26 N. 45.01 E. (See Plan Book)

DOCUMENTS:
Health Certificate.
Crew List.
Passenger List.
Provision List.
Ship's Register.

PILOTAGE: Vessels await Pilot on the outer anchorage 5-10 cables S.W. of Tamara lighthouse. In case of stormy weather and rough sea, it is permitted to wait for Pilot on the inner anchorage. Pilotage for all ships for berthing, unberthing and shifting is compulsory. The Pilot will board arriving vessels only after having received written request from the Agent.

ANCHORAGE: Outer anchorage 5-10 cables S.W. from Tamara lighthouse. Inner anchorage limited by the line between 10° 26′ 16″ N. 45° 00′ 14″ E. and 10° 26′ 26″ N. 45° 00′ 40″ E. and between perpendiculars from the ends of this line towards Cape of Tamara.

RESTRICTIONS: All ships should anchor in such a position that with any wind they will not impinge on the leading light line, or to the South of this line, or in the vicinity of the deep water pier.

MAX. SIZE: Draft 28 ft., length/breadth no restrictions.

HEALTH: Until free pratique is received nobody except Pilot is to board or to leave the ship.

RADIO: Cable Agents giving ETA, draft, length and cargo via port radio station – 6 OY (SIX OU WAI) call and reply in the frequency 500 kc, working 450 kc. Working hours from 0700 to 1700 hrs. local time. Traffic list 3 times a day at 0800, 1200 and 1600 hrs.

TUGS: Use ship's lines. There is one tug of 300 h.p. and one of 700 h.p. Mooring launches available.

BERTHING: Depth at pier 9.8 m. length of pier 360 m.

Transhipment of general cargo is allowed to be loaded and discharged at Berbera with exemption of Harbour Tax and Warehouse Dues. Only handling charges are levied according to port tariff.

CRANES: 2 electric portal cranes, capacity 5 tons. 2 mobile cranes, capacity 40 tons and 5 tons.

STEVEDORES: Stevedore gangs are ordered by the port, all necessary gear supplied by the Port Authority including heavy lift handling gear. Work can be arranged on official holidays on overtime basis.

General cargo for transhipment at Berbera does not incur harbour tax and warehouse fees, only handling charges are levied.

TANKERS: Discharge on two mooring buoys, Shell Company has Russian, American and English standard connecting hoses – draft 28 ft. Max. size 18,000 tons. Depth 9.8 m.

DENSITY: From 36.00% to 37.00%.

FRESH WATER: Supplied only alongside pier. No water barge.

Shipmasters Report: Available in good quantities except from June to September, when usually none available for ships.

FUEL: None available.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: On liners normally by crew, with the assistance of stevedores, otherwise according to charter party.

CUSTOMS ALLOWANCE: Each crew member is allowed 100 cigarettes or 100 grammes tobacco and one bottle of any beverage.

CONSULS: Not available.

REPAIRS: Port management has well-equipped mechanical workshop which is able to carry out minor repairs for ships.

HOLIDAYS: Muslim Edd-Al-Duha (say between 15th and 20th of Febuary); Muslim New Year (about 21st-23rd March); African Solidarity Day (15th April); Labour Day (1st May); Prophet Mohammed's Birthday (22nd May); Independance Day, Northern Somalia (26th June); Independence Day of the Somali Democratic Republic (1st July); National Flag Day (12th October); United Nations Day (24th October); Human Rights Day (10th December); Revolutionary Day (21st October).

TELEPHONE NUMBERS: Port Manager, No. 42; Harbour Master/Pilot, No. 58; Senior Port Officer, No. 21; Customs, No. 38 and 12; Port Radio Station, No. 41; Workshop, No. 53; Main Gate, No. 50.

AUTHORITY: Somali Ports Authority.

CHISIMAIO (or Kismayu): 00.22 S. 42.34 E.

DOCUMENTS:
6 Lists of Crew.
2 Stores Lists.
2 Lists of Articles owned or in possession of Master, officers and crew (alcohol, cigarettes, cigars, tobacco, radios, cameras, binoculars).
1 Cargo Manifest (must be made out in accordance with original B/L issued. In the column "Consignees" the name of the party to be notified must be mentioned complete with full postal address. Weight should be specified in kilos and measurement in cu.m.). 6 copies to be sent in advance unfreighted; 2 copies to be sent in advance freighted; 2 copies to be sent by ship's box.
1 Copy not negotiable of B/L for each B/L issued.
2 Transit Cargo (total numbers of packages and total weight for each destination).
6 Lists of Passengers to be Disembarked.
2 Lists of Passengers in Transit.
1 Health Document will be prepared at the arrival of the Vessel in port, on special local form.

PILOTAGE: Pilotage is compulsory. Thirty-six hours before arrival a cable must reach the Agent with vessel's ETA. The Agent will inform the Pilot who will pick up the vessel in approx. position 0° 20′ S., 42° 34′ E., two miles S.E. of Fairway buoy. Pilot boat is a tug which is used while berthing.

ANCHORAGES: In the port basin, from 27 to 30 ft. deep, excellent holding ground.

RESTRICTIONS: Entrance channel about 200 m. wide, marked by buoys. Entrance may be effected during daylight hours only. Port closed from 1800 to 0600 hours.

MAX. SIZE: Port consists of two L-shaped quays, one 340 m. length the other 280 m. Max. draft 28 ft. at lowest low tide.

HEALTH: Pratique granted after port Authorities, including doctor, board vessel. Any suspected contagious illness aboard to be reported immediately to the doctor at the arrival. Vessel calling from other Somali ports subject same procedure.

RADIO: Use Mombasa and/or Aden Radio. Mogadiscio Radio does not keep a 24 hours service.

TUGS: Tug, one only, takes the Pilot aboard and after joins vessel whilst berthing and sailing. Ship's lines used.

BERTHING: No specific requirement to berth in the port. Vessel entering into port basin after 1745 hrs. will berth next at 0630 hrs. Vessel must sail before 1730 hrs. otherwise sailing will be postponed to next day at 0630 hrs. No vessel permitted berth and/or sail without Pilot.

STEVEDORES: Vessel must give accurate ETA at least 36 hours in advance to enable Agent order necessary gangs. Average loading/unloading rates per gang, per hour;
(a) General cargo, 17 to 20 tons.
(b) Cargo in bags, 22 to 25 tons.

No shore facilities, all cargo to be loaded and unloaded with ship's gear on dock or pontoons.

MEDICAL: No advance notice required for medical attention. Hospital facilities available, but specialised treatment and surgery is not. Smallpox, yellow fever and cholera vaccination certificates inspected on arrival.

FRESH WATER: Available at wharf, rate 15/16 t.p.h.

FUEL: Not available.

GANGWAY/DECK WATCHMEN: Gangway watchmen service carried out by the Customs Police. Food on vessel's account; no other charges. Deck watchmen not used.

OPENING/CLOSING HATCHES: Normally carried out by stevedores with the help of the crew. Vessel's crew may, if required by the vessel, do so. Crew may close the hatches prior to sailing.

CUSTOMS ALLOWANCE: 200 cigarettes, or 0.5 lb. tobacco or 0.5 lb. cigars. One bottle spirits opened. Bond sealed but can be reopened upon application. Cigarettes and spirits trafficking between alongside and between vessel and shore strictly prohibited. It should be noted that tea, coffee and sugar are sealed in bond in addition to the usual items of spirits, cigarettes, tobacco and cigars.

IDENTIFICATION CARDS: Not required.

CONSULS: Italian Consul only. No telephone.

REPAIRS: Repairs only by vessel's own facilities.

REPATRIATION: Air communication via Mogadiscio.

AIRPORT: About 6 km. from the port. Two local flights weekly to Mogadiscio only.

TIME: GMT plus 3 hours.

HOLIDAYS: Port is completely closed on 1st day of Arafa, 1st day of Idd El Fitr, 1st July (Independence Day). On all other public holidays and on Friday (local Sabbath) work performed subject premium rates of pay.

TELEPHONES: No possibility for placing telephones on board.

GENERAL: Vessels should not dispose any waste into harbour or on to quays, lower lifeboats, or use radio station without prior permission from authority.

SHORE LEAVE: No restrictions.

REGULATIONS: Banana vessels are given priority.

AUTHORITY: Somali Port Trust.

MOGADISCIO: 02.02 N. 45.21 E.

DOCUMENTS:
2 Lists of Crew.
2 Stores Lists.
2 Lists Articles owned or in possession of Master, officers and crew (alcohol, cigarettes, cigars, tobacco, radios, cameras, binoculars).
Cargo Manifest (must be made out in accordance with original B/L issued. In the column "Consignees" the name of the party to be notified must be mentioned complete with full postal address. Weight should be specified in Kilos and measurement in cu. m.). 6 copies to be sent in advance unfreighted; 2 copies to be sent in advance freighted; 2 copies to be sent by ship's box.
Copy not negotiable of B/L for each B/L issued.
2 Lists Transit Cargo (total numbers of package and total weight for each destination).
6 Lists of Passengers to be Disembarked.
2 Lists of Passengers in Transit.
1 Health Document will be prepared at the arrival of the vessel in port, on special local form.

PILOTAGE: The Pilot will board arriving vessels only after having received written request from the Agent.
ANCHORAGE: About 0.5 mile off-shore in depths up to 45 ft. in open roadstead. Because of occasional heavy swell, max. recommended draft 31 ft.
HEALTH: Pratique granted after Port Authorities, including doctor, board vessel. Any suspected contagious illness aboard to be reported immediately to the doctor at the arrival. Vessel calling from other Somali ports, subject same procedure.
RADIO: Use Mombasa and/or Aden Radio. Mogadiscio Radio does not keep 24 hours watch.
BERTHING: Cargo vessels work cargo to lighters at the anchorage.
TANKERS: One berth available for tankers up to 30 ft. draft.
FRESH WATER: Not available.
FUEL: Not available.
STEVEDORES: Vessel to give accurate ETA at least 24 hours in advance to enable Agent order necessary gangs. No shore facilities; all cargo to be loaded and unloaded with ship's gear.
MEDICAL: No advance notice for medical attention required at vessel's arrrival. Hospital facilities available, but specialised treatment and surgery is not. Smallpox vaccinations and yellow fever Certificates inspected on arrival.
GANGWAY/DECK WATCHMEN: Gangway watchmen service carried out by the Custom Police; food on vessel's account.
OPENING/CLOSING HATCHES: Normally carried out by stevedores with the help of the crew. Vessel's crew may, if required by the vessel, do so. Crew may close the hatches prior to sailing.
CUSTOMS ALLOWANCE: 200 cigarettes, or 5 lb. tobacco or 0.5lb. cigars. One bottle spirits opened. Bond sealed but can be reopened upon application. Cigarettes and spirits trafficking alongside and between vessel and shore strictly prohibited. It should be noted that tea, coffee and sugar are sealed in bond in addition to the usual items of spirits, cigarettes, tobacco and cigars.
AIRPORT: Situated 8 km. from the port. Regular international flights.
TIME: GMT plus 3 hours all year round.
HOLIDAYS: Muslim Edd-Al-Duha (say between 15th and 20th of Febuary); Muslim New Year (about 21st-23rd March); African Solidarity Day (15th April); Labour Day (1st May); Prophet Mohamed's Birthday (22nd May); Independence Day, Northern Somalia (26th June); Independence Day of the Somali Democratic Republic (1st July); National Flag Day (12th October); United Nations Day (24th October); Human Rights Day (10th December); Revolutionary Day (21st October).
DEVELOPMENTS: A new deep-water harbour is under construction at Mogadiscio.
AUTHORITY: Harbour Master.

NOTES

Please also advise Shipping Guides Ltd.

South Africa

CAPETOWN (Table Bay): 33.56 S. 18.26 E.

(See Plan Book)

PORT LIMITS: Westwards by a straight line between Green Point and Robben Island lighthouses, and Northwards by a straight line from Robben Island lighthouse East (true) to the Eastern shore of Table Bay, thence Southwards along high water mark, so as to include the foreshore to the Castle, thence back to Green Point lighthouse.

DOCUMENTS:

Customs:
- *Form DA.1, Report Inwards/Outwards for Ships.
- *Form DA.3, Certificate of Clearance for Ships.
- *Form DA.4, Transire – for a destination in the R.S.A.
- *Form DA.5, List of Sealable Goods on board ship.
- Ships Crew List (Customs Department) 6 Copies.

Post Office:
- *P1/27, Certificate of Departure of Vessel.
- P.1/8, Post Office Certificate (Declaration).

Port Health:
- Maritime Declaration of Health.
- Crew List with last vaccination dates.
- Deratisation Certificate.

Port Authority:
- *T.958, Report of Arrival.
- *T.962, Departure/Shifting Notification.
- Ship's Manifest.

*Completed by Agent.

PILOTAGE: Compulsory. One hour advance notice to be given to the Port Captain through VHF radio, call sign Port Operations, on Channel 16, working Channel 12. Pilot boat fitted with multi-channel VHF. Motor pilot boat, black hull, white housing also 3 pilot vessels with black hull, brown upperworks, gold and green funnel. Pilot taken aboard at port entrance.

HELICOPTER SERVICE: Available for mail and small items of stores for vessels not wishing to enter harbour. See "Shipmaster's Report".

LAUNCH SERVICE: For vessels not wishing to enter harbour, Agent may arrange launch service for mail, stores, etc. In this case service only permissible in area North and West of position at least 5 miles due West of Robben Island. See "Shipmaster's Report".

RESTRICTIONS: Vessels not permitted to enter unless Agents have been appointed. Oil tankers and ships carrying explosives or dangerous goods restricted to daylight hours.

MAX. SIZE: Passenger and dry cargo vessels: max. length up to 1,000 ft. overall; draft 36 ft. Tankers: max. length 820 ft. overall; draft 43 ft. (tidal).

HEALTH: Pratique granted at first port of entry in South Africa. Pratique message 24 hours prior to arrival to "Port Health" at port of entry. If radio pratique not granted "Q" flag to be flown until ship has been cleared. Valid certificates must be held for smallpox and yellow fever. Ships from Eastern ports must also have valid certificates for cholera and typhoid.

RADIO: Capetown Radio, call sign ZSC. VHF and R/T 2182.

TUGS: Join vessel approximately 0.25 mile from harbour entrance. Tug's wires used at no extra charge.

BERTHING:

Wharfage	*Length* (m.)	*Depth at LWOST* *Max.* (m.)	*Depth at LWOST* *Min.* (m.)	*Cranes (electric)* *No.*	*Cranes (electric)* *Lifting capacity* (tons)
Victoria Basin					
No. 1 Jetty	177.7	—	6.0	—	
(being reconstructed)	162.3	—	6.0	—	
No. 2 Jetty	195.1	—	9.1	10	4
	195.1	—	10.0		
Collier Jetty	208.5	6.4	5.6	—	
	212.4	9.8	5.3		
South Arm (Berths 1, 2, 3, 4)	600.5	—	8.2	1 18 4	15 4 3
Elbow	161.5	—	9.6	6	4
No. 4 Quay	29.0 18.3	—	3.0	—	
No. 5 Quay	93.5	—	4.3	—	
No. 6 Quay	178.0	—	6.7	6	4
No. 7 Quay	192.0	—	9.9	6 1	4 15
East Pier	239.6	—	10.0	7	4
Cross Berth	137.2	—	4.4	—	
Fish Quay	91.1	—	2.4	—	
Alfred Basin					
West Quay	225.9	—	5.2	2	4
North Quay	134.1	—	6.1	2	4
East Quay, No. 1 Berth	100.6	—	3.9	—	
East Quay, No. 2 Berth	70.7	—	4.1	—	
East Quay, No. 3 Berth	64.0	—	4.0	—	
East Quay, No. 4 Berth	54.9 39.6	—	4.0	—	
South Quay	45.7	—	4.3	—	
Duncan Dock					
Berth "A"	274.3	—	10.9	10 1	4 15
Berth "B"	243.8	—	11.2	21	4
Berth "C"	213.4	10.7	10.3		
Berth "D"	185.0	9.8	9.1		
Berth "E"	225.6	—	10.6	3 45	15 4
Berth "F"	249.9	—	10.6		
Berth "G"	249.9	—	10.6		
Berth "H"	318.5	12.8	—		
Berth "J"	249.9	—	10.7		
Berth "K"	249.9	—	10.7		
Berth "L"	246.3	—	10.7		
Berth "M", N.W. Side	217.9	6.7	6.1		
	43.9	6.1	6.1		
Repair Pier, N.E. Side	13.7	10.7	6.1	1	15
	444.1	12.0	10.2		
Repair Pier, S.W. Side	13.7	12.0	6.1		
	444.1	—	12.0		
Graving Dock Landing Wharf:	274.3	—	10.1	—	
N.E. Side	274.3	—	14.0	—	
S.W. Side	274.3	—	14.3	—	
	274.3	—	12.0	—	
No. 1 Eastern Mole	259.1	—	13.0	—	
No. 2 Eastern Mole	259.1	—	14.0	—	

Ben Schoeman Dock:

Berth	*Length* (m.)	*Min. Depth at LWOST* (m.)	*Cranes* *No.*	*Cranes* *Capacity*
Coaster Berths				
Berth 500	201.4	10.7	—	—
Berth 501	183.0	10.7	—	—
Berth 502	183.0	10.7	—	—
Deep Sea Berth				
Berth 600	220.0	10.7	—	—
Berth 601	236.0	14.0	—	—
Berth 602	305.0	14.0	2	40 tons
Berth 603	305.0	14.0		
Berth 604	305.0	14.0		

Roll-on/Roll-off facilities: Available at berths 500 and 501.

1 future 40 ton container wharf crane will be provided at berths 501 and 502.

Two additional 40 ton container wharf cranes will be provided at berths 602 to 604.

Three 35 ton container stacking cranes are available at berths 602 to 604.

Two future 35 ton container stacking cranes will be provided at berths 602 to 604.

CRANE: *Floating crane:* Lifts 60 tons at 24.4 m. radius and another floating crane lifts 200 tons at 21.5 m.

BULK HANDLING FACILITIES: *Grain Elevator:* 1 terminal grain elevator of 27,220 tons storage capacity, with loading conveyors to the Collier Jetty. Continuous intake capacity of elevator, 750 t.p.h.; shipping capacity, 1,000 t.p.h. Other bulk cargoes handled at general cargo berth with shore crane. No LPG facilities.

MEDICAL: Unrestricted hospital facilities. Medical assistance must be arranged through Agents.

TANKERS: Diameter of line 8 in. 2 Tanker berths, max. length 249.9 m., max. draft 14.0 m. (tidal). Slop tank capacity 1,500 tons, available for oily ballast from tankers back-loading white oil.

DENSITY: 1025.

FRESH WATER: Delivery by hose ex-wharf hydrants. 50 t.p.h.

FUEL: 48 hours notice required. All grades of fuel available.

CERTIFICATES: Safety Certificates in respect of construction and gear.
- Radio Certificate.
- Load Line Certificate.
- Deratisation Certificate.
- Certificate of competent officers (passenger ships only).

CUSTOMS ALLOWANCE: 200 cigarettes per man. Officers allowed 1 bottle spirits, 1 bottle wine and 6 bottles beer.

CARGO GEAR: All cargo handling equipment must be in good condition and certificates available for inspection.

IDENTIFICATION CARDS: Not required.

CLASSIFICATION SOCIETIES: Lloyds, BV, N.V and ABS.

CONSULS:

Argentine
Australia
Austria
Belgium
Bolivia
Brazil
Canada
Chile
Denmark
Finland
France
Germany
Greece
Italy
Japan
Netherlands
Norway
Panama
Peru
Portugal
Spain
Sweden
Switzerland
United Kingdom
U.S.A.
Uruguay

GANGWAY/DECK WATCHMEN: Ship's Agent makes necessary arrangements.
OPENING/CLOSING HATCHES: Mechanical hatches opened/closed by crew. Other types of hatches by stevedores.
REPAIRS: All types of repairs can be undertaken.
DRY DOCKS:
Sturrock Graving Dock: Situated at S.E. end of Duncan Dock:

Dimensions—	Overall docking length	360.0 m.
	Length on keel blocks (first to last keel block)	338.3 m.
	Length on bottom (dock floor)	350.4 m.
	Width at coping	47.5 m.
	Width at entrance top	45.1 m.
	Maximum width at bottom	38.4 m.
	Depth on entrance sill, HWOST	13.7 m.
	Depth on inner sill, HWOST	15.1 m.

A docking length of 369.6 m. can be obtained by placing the caisson in the emergency stop at the entrance.

The dock can be divided into 2 compartments of either 132.5 m. and 216.1 m. or 205.7 m., and 142.9 m. respectively.

One 50 ton and one 10 ton electric crane on 7.6 m. gauge track, two 5 ton electric cranes on 4.9 m. gauge track and three 4 ton electric cranes on 4.9 m. gauge track are available.

The dock can be emptied in 4 hours.

A landing wharf 548.6 m. in length is provided on the port side of the graving dock to facilitate the dry-docking of ships.

A repair pier 457.8 m. in length with a depth of 10.7 m. on one side and 12.0 m. on the other side at LWOST is provided off "M" berth. One 15 ton electric crane on 9.1 m. gauge track is available.

Robinson Graving Dock: Situated in Alfred Basin:

Dimensions—	Overall docking length	161.2 m.
	Length on keel blocks (first to last keel block)	142.6 m.
	Length on bottom	152.4 m.
	Width at coping	27.4 m.
	Width at entrance top	20.7 m.
	Maximum width at bottom	17.2 m.
	Depth on entrance sill, HWOST	7.9 m.

Three 4 ton electric cranes on 4.1 m. gauge track and one 15 ton electric crane, on 4.1 m. gauge track are available.

The dock can be emptied in 3 hours.

Floating Dock No. 2:

Dimensions—	Extreme length	62.8 m.
	Length on bottom	61.0 m.
	Length on keel blocks	58.2 m.
	Extreme width	19.2 m.
	Width at entrance	13.7 m.
	Height of keel blocks	1.2 m.
	Draft on keel blocks, HWOST	5.6 m.
	Lifting capacity	1,016 tons

A 4 ton electric crane is mounted on a side wall of the dock.

Syncrolift Situated in Alfred Basin:

Dimensions—	Lifting capacity	1,778 tons
	Maximum length of vessel	61 m.
	Maximum width of vessel	15 m.

Slipways:
There are 4 boat slips for yachts and small craft.
REPATRIATION: All facilities available.

1. *Vessels docking*
   - *(a)* Any personnel arriving to join a vessel at Capetown should possess a valid travel document and a brief letter of introduction. Entry Permits can be extended if the vessel is late in arriving.
   - *(b)* Application to spend time (longer than 48 hours) in South Africa prior to repatriation should be made to the local immigration authorities.
2. *Vessels calling off Port Limits*
   - *(a)* The same requirements apply as for 1(a) with the exception of personnel who have entered the country from a vessel calling off Port Limits.
   - *(b)* The following applies to all personnel disembarking from vessels calling off Port Limits.
     - (i) Repatriation must be made within 48 hours from time of signing off.
     - (ii) In order to comply with local immigration authorities the Agent requires the following details, for each individual, at least 72 hours before disembarkation:
       - *(a)* Full name and nationality.
       - *(b)* Rank and, if Technician, name of employers.
       - *(c)* Passport number, place and date of issue.
       - *(d)* Place and date of birth.
       - *(e)* Destination and class of travel.
       - *(f)* If air ticket held on board, full details of routing.
       - *(g)* Reasons for disembarkation.

In the case of personnel transferring from one company vessel to another, the same conditions apply except the maximum time permitted for such transfer is 78 hours. If they have not joined the vessel within this period, repatriation must be arranged forthwith.

There are no difficulties for any personnel disembarking for medical reasons.

AIRPORT: D.F. Malan Airport – 20 km. from harbour. Daily flights to Johannesburg connecting with overseas flights by regular airlines.
TIME: GMT plus 2 hours.
HOLIDAYS: New Year's Day (1st January); Good Friday, Easter Monday, Ascension Day (date varies); Republic Day (31st May); Settlers' Day (1st Monday in September); Kruger Day (10th October); Day of the Covenant (16th December); Christmas Day (25th December); Boxing Day (26th December). Cargo is not worked on Christmas Day and New Year's Day.
POLICE/AMBULANCE/FIRE: Police, 438-3471; Ambulance, 51-5151; Fire, 438-3431 or 22-2222.
TELEPHONES: Telephones can be supplied at all berths. Arrange through Agents.
SHORE LEAVE: Allowed.
DEVELOPMENTS: An outer harbour is to be constructed initially providing 8 berths for dry cargo ships with a depth alongside of 42 ft. at LWOST.
SHIPMASTER'S REPORT: Off limits launch (and helicopter) service.

Port, Immigration, Customs and Health Authorities have made it clear that this service is a privilege and not a right. It is therefore of the utmost importance that the regulations are strictly adhered to.

The Agent must apply to the Port Captain for permission to service the vessel and the following details must be submitted. Name of vessel, time and date of arrival, draft, where from, where to, stores required and other reasons for call.

Launch is only allowed to be alongside vessel for 1 hour maximum otherwise vessel will have to enter port limits and incur port dues. Tariff R.15.00 per half hour, minimum R60.00.

If personnel embarking, Immigration Authorities require name of vessel, tonnage, whether ballast or loaded and names of persons embarking. If persons disembarking then full names, dates and places of birth, nationality, passport or discharge book number and expiry date, whether South African visa held and comprehensive reason for leaving vessel, arrangements made for departure from South Africa (usually 24/48 hours allowed), and flight number. This does not apply to medical cases. Guarantee from Agent accepting full responsibility and liability regarding maintenance and repatriation expenses. Persons disembarking must report immediately to Passport Control. Failure to report or leave South Africa on the booked flight is an offence and in addition to any fine or imprisonment the Owners will be refused any further off limits service for *any of their vessels.*

Port health require application for radio pratique 48/24 hours before arrival. Customs require all bonded stores loaded to be signed for and ship's stamp applied. Stores or spares being landed must have prior notification to Agent and an accompanying letter giving full description and disposal instructions.

Agents require 168, 96, 48, 24, and 12 hours' notices followed by any amendment to ETA. Stores requirements should be sent at least 96 hours before arrival. Three copies of Crew List to be sent ashore with launch (or helicopter).

Services operate 24 hours per day and usual rendezvous position is 5 miles West of Green Point lighthouse for launch (and 12 miles West for helicopter). Launch can carry up to 30 tons stores (and helicopter up to 2,000 lb.). Vessels should not anchor but provide a good lee and have derrick rigged. Contact should be made with the launch (or helicopter) 1 to 2 hours before arrival rendezvous point using Channel 16.

AUTHORITY: South African Railways, Port Captain, Table Bay Harbour.
AGENT: Freight Services Ships Agency Co., 210 Cape Town Centre, Heerengracht, POB 702, Cape Town 8000. Tel: 45-4011. Telex: 577614/577932. Cables: Seafreight Cape Town.

DURBAN (Port Natal): 29.53 S. 31.02 E.
(See Plan Book)

PORT LIMITS: The area of sea bounded by: (1) to the North, a line drawn from the coast in position: 28° 48′ 42″ S. 31° 02′ 32″ E. in a 090° (True) direction to position 29° 48′ 42″ S. 31° 7′ 30″ E.; (2) to the South, a line drawn from the coast in position; 29° 54′ 06″ S. 31° 02′ 30″ E. in a 090° (True) direction to position 29° 54′ 06″ S. 31° 7′ 30″ E.; (3) to the East, a line joining the seaward positions in (1) and (2).
DOCUMENTS: See "Cape Town".
PILOTAGE: Compulsory. As much advance notice as possible to be given to Port Captain through VHF radio – Port Operation – calling Channel 16, working Channel 12. Call Pilot by Aldis lamp if necessary. Pilot boats fitted with multi-channel VHF. Motor pilot boat – black hull, white housing. "Pilot-Loods" painted in black on housing. Steam pilot boat – black hull, brown housing and yellow funnel. Pilot taken aboard at outer anchorage.
RESTRICTIONS: Vessels not permitted to enter unless Agents have been appointed. Oil tankers and ships carrying explosives or dangerous goods restricted to daytime hours. The depth of the inner and outer channels is 12.8 m. at LWOST.
MAX. SIZE: The draft permitted is 40 ft. (12.10 m.) The length of 800 ft. is also exceeded with the Port Captain's approval. Vessels over 600 ft. length berth daylight only.
HEALTH: Pratique granted at first port in South Africa. Pratique message 24 hours prior to arrival to "Port Health" at port of entry. If radio pratique not granted "Q" flag to be flown until ship has been cleared. Valid certificates must be held for smallpox and yellow fever. Ships from Eastern ports must also have valid certificates for cholera and typhoid.
Shipmaster's Report: Valid Yellow Fever Certificate not required.
RADIO: Durban Radio – ZSD.
TUGS: 8 first-class tugs available. Join vessels in entrance channel. Tug's wires used at no extra charge.

BERTHING:

Wharfage	Length (m.)	Depth at LWOST		Cranes (electric)	
		Max. (m.)	Min. (m.)	No.	Lifting capacity (tons)
Point and "T" Jetty					
A to C Berths	775	11.7	9.1	23	4
				1	*81
D to H Berths	1,024	9.1	7.0	35	4
L and M Berths	651	12.2	11.0	17	4
				2	15
N Berth	262	12.2	12.2	6	4
O and P Berths	620	12.2	11.0	14	4
				3	7.5
				1	15
Q and R Berths	366	11.0	11.0	11	4
A Berth Extension (Tug Berth)	62	9.1	9.1	—	
Repair Quay (Shop 17)	183	6.7	6.7	1	10
Pier No. 1					
Berth 101	229	12.8	12.8	4	4
				2	7.5
Berth 102	213	12.8	12.8	4	4
				2	7.5
Berth 103	235	12.8	12.8	4	4
				2	7.5
				4	4
Berth 104	351	12.8	12.8	2	7.5
				1	15
Berth 105	235	12.8	12.8	4	4
				2	7.5
Berth 106	213	12.8	12.8	4	4
				2	7.5
Berth 107	238	12.8	12.8	4	4
				2	7.5
Cross Berth					
Berths 108 and 109	545	12.8	12.8	1	35
(Berth 108 to be commissioned March 1979)					
Pier No. 2					
Berth 201	335	12.8	12.8	1×40-ton wharf container crane*	
Berth 202	335	12.8	12.8		
Berth 203 (Ro-Ro)	305	12.8	12.8	5×40-ton wharf container cranes in use on this quay.	
Berth 204	305	12.8	12.8		
Berth 205 (Ro-Ro)	305	12.8	12.8		
Bluff Berths					
Berth 1	148	9.1	9.1	—	
Berth 2	177	10.4	10.4	—	
Berth 3	180	9.1	9.1	—	
Berth 4	238	10.7	10.7	—	
Dolphins Berths—Island View					
Berth 1	213	12.8	12.8	—	
Berths 2 and 3 (167.5 m each)	335	10.7	10.7	—	
Berth 4	186	10.7	10.7	—	
Berths 5 and 6 (186 m. each)	372	11.0	10.7	—	
Berth 7	229	12.8	12.8	—	
Berth 8	229	12.8	12.8	—	
Berth 9	244	12.8	12.8	—	
Salisbury Island					
Berths 1 and 2 (213 m. each)	427	9.1	7.6	1	3
Harbour Craft Quay	276	12.8	9.1	—	
Harbour Craft Quay (works foreman)	103	6.1	6.1	—	
Maydon Wharf (Congella)					
Berth 1	152	9.9	9.9	—	
Berth 2	152	9.9	9.9	—	
Berth 3	152	9.9	9.9	—	
Berth 4	152	9.9	9.9	—	
Berth 5	201	9.9	9.9	—	
Berth 6	198	9.9	9.9	6	4
Berth 7	198	9.9	9.9	5	4
				1	4
Berth 8	165	9.9	9.9	—	
Berth 9	160	9.9	9.9	4	3
				1	4
Berth 10	283	10.7	9.9	8	4
Berth 11	160	9.9	9.9	1	15
Berth 12	275	6.1	6.1	11	4
Berth 13	175	9.9	9.9	—	
Berth 14	175	9.9	9.9	—	
Berth 15	213	9.9	9.9	—	
Graving Dock Return Wall	79	11.3	6.1	—	
Repair Quay	155	6.1	6.1	2	3
				1	15
Fish Wharf	152	6.1	6.1	—	
Ship-repair Jetty	413	8.5	—	1	10

*In course of erection, second unit to be commissioned in August 1979.

*81 ton crane can move at right angles to quay only.

CRANES: *Floating Cranes:* 3, lifting capacities of 25 tons, 40 tons and 125/200 tons, respectively.

Mobile Cranes: Diesel-electric road cranes: One 6.5 tons, four 12.5 tons, four 15/35 tons, one 15/43 and one 33-ton crane. Two 25-ton side-loaders (for container handling).

BULK HANDLING FACILITIES: *Grain elevator:* 1 terminal elevator of 38,100 tons storage capacity, with shipping gallery. Intake capacity of elevator, 1,000 t.p.h.; shipping capacity 1,271 t.p.h.

Privately owned facilities:

(1) Manganese Ore Loading Facilities. Electrical conveyor plant at Congella. Shipping capacity 318 t.p.h.

(2) Sugar Terminal. At Maydon Wharf. Storage capacity of 520,000 tons and shipping rate of 711 tons to 762 t.p.h.

(3) Alumina Handling Facilities. At the Crossberth. Storage capacity of 33,000 tons and conveyor system with discharge rate of 300 t.p.h. Max. size 45,000 d.w.t., max. draft 38 ft.

(4) Bulk Soda-Ash Facilities. At Maydon Wharf. Storage capacity of 20,865 tons and conveyor system with discharge rate of 91 tons to 136 t.p.h.

(5) Bulk Shipping Terminal for pelletised maize products, ground nuts and soya beans located at Dolphin Berth No. 3 Island View.
Storage capacity 18,000 tons. Shipping rate 400 to 700 t.p.h. This terminal is currently being developed to export vegetable oils.

(6) Multi-purpose Bulk Handling Facility for pelletised maize and wheat products, ground nuts, barley malt, rice, soda ash and fluospar located at Berth No. 5 Maydon Wharf.

Storage capacity:	agricultural products	30,500 tons
	mineral products	60,000 tons
	soda ash silos	12,000 tons
Shipping rate:	500 tons to 1,000 tons per hour	
Discharge rate:	200 tons to 300 tons per hour	

(7) Bulk Handling Facilities for the export of wood chips located on Berth 109 Crossberth, together with alumina facilities mentioned in (3) above.

Storage capacity:	50,000 tons
Shipping rate:	600 tons per hour

Bulk-loading Facilities: Electrically-driven appliances for the loading of coal, pig iron, manganese ore, iron ore, etc., are provided at the Bluff. There are 3 dumpers with capacity of 1220 tons, 711 tons and 1,220 t.p.h., respectively. 2 belt loaders capable of loading at the rate of 610 t.p.h. and 3 bucket transporters with an aggregate capacity of 1,220 t.p.h. are available. The overhead storage bins have a capacity of 10,160 tons, while concrete bins are provided for ground storage with the following capacities:

1. Anthracite throughout–64,630 tons.
2. Mixture of anthracite and pig iron: Anthracite–48,000 tons.
Pig iron–43,345 tons.

Anthracite Storage Facilities: Concrete ground storage bins of 18,290 tons capacity at Salisbury Island.

CONTAINER HANDLING FACILITIES: A major container terminal comprising 5 deep sea berths (201-205) and 2 coaster berths (108-109) is nearing completion. The deep sea facility will be equipped with 7×40 ton wharf container cranes and 1×35 ton unit will be provided at Berth 108.

The entire complex covers some 125 hectares and provides very substantial stacking areas backed up by a large terminal building with computer control, workshop complex and a road/rail transfer terminal to handle unit trains conveying 80 t.e.u.'s. This rail terminal is served by 2 modern 35-ton container gantry cranes covering 3 rail tracks and 2 traffic lanes. The back up system operates on a combined trailer/straddle carrier system comprising 34×30 ton, 8-wheeled straddle carriers augmented by a substantial fleet of terminal haulers and trailers as well as a large cartage fleet operated by the Port Authority for the local delivery of containers.

A very modern stuffing and re-stuffing depot located on a 13 hectare site immediately adjacent to the harbour terminal is operated by private enterprise (Messrs. S.A. Cargo Depots). The depot is fully equipped with re-stuffing sheds and container handling equipment to cater for LCL traffic.

STEVEDORES: Stevedoring undertaken by private enterprise stevedores appointed by ship's Agent.

MEDICAL: Unrestricted hospital facilities. Medical assistance must be arranged through Agents.

TANKERS: Off-shore Single Buoy mooring suitable for tankers up to 300,000 tons situated in position 30° 0′ 30″ S., 30° 58′ 29″ E.

Mooring Master boards in position 5 km. East of SBM. Rope messengers should be available on forecastle, and manifold prepared to connect two 16-in. hoses ASA 150 flanges. Stores launch can be arranged for up to 30 tons stores, provided that vessels anchor outside port and territorial limits. No bunkers, no fresh water, and no shore leave for vessels at single buoy mooring.

In harbour 4 tanker berths, for vessels of max. length 800 ft., max. draft 12.3 m. Slop tanks available. Crude discharge through 10 in, hoses, white oil 8 in. hoses, loading products through 8 in. hoses.

Additional Crude Oil Discharge Berth with depth alongside of 42 ft. under construction, but maximum permissible draft 12.3 m.

DENSITY: 1025.

FRESH WATER: Delivery by hose ex-wharf hydrants. Rate of delivery 40 t.p.h.

FUEL: All grades of fuel available. 48 hours notice required. Fuel may be obtained alongside berths or by barge. No barging outside harbour area.

OPENING/CLOSING HATCHES: Mechanical hatches opened/closed by crew. Other types of hatches by stevedores.

CERTIFICATES:

Safety Certificates in respect of construction and gear.
Radio Certificate.
Load-line Certificate.
Deratisation Certificate.
Certificate of competent officers (passenger ships only).

CUSTOMS ALLOWANCE: The following are allowed for Master, officers and crew respectively: Tobacco in any form, 8 oz., 6 oz., 4 oz. Spirits: 26.7 fl. oz., 26.7 fl. oz., nil. Wine: 106.6 fl. oz. each. Beer: 106.6. fl oz., 106.6 fl. oz., nil.

CARGO GEAR: All cargo handling equipment must be in good condition and certificates available for inspection.

IDENTIFICATION CARDS: Required, otherwise National Identity Cards, if available.

CONSULS:

Austria	tel. 69512	Netherlands	tel. 20387
Belgium	,, 25968	Norway	,, 21694
Chile	,, 356171	Panama	,, 20653
Denmark	,, 20731	Portugal	,, 22603
Finland	,, 21694	Sweden	,, 66591
France	,, 20181	Switzerland	,, 21130
Germany	,, 29474	Thailand	,, 20731
Greece	,, 25086	U.K.	,, 313131
Italy	,, 64107	U.S.A.	,, 28388
Japan	,, 78517		

REPAIRS: All types of repairs can be undertaken.

DRY DOCKS: *Prince Edward Graving Dock:*

Dimensions—	Overall docking length	352.044 m.
	Length on keel blocks	327.660 m.
	Length on bottom	352.044 m.
	Width at coping	42.215 m.
	Width at entrance top	33.528 m.
	Maximum width at bottom	33.528 m.
	Depth on entrance sill HWOST	12.497 m.
	Depth on inner sill HWOST	13.106 m.

A docking length of 364.44 m. can be obtained by placing the caisson in the emergency stop at the entrance.

The dock can be divided into 2 compartments:

Outer 206.906 m. and inner 138.684 m.

One 25 ton electric crane with 27.342 m. radius and one 10 ton crane on 7.925 m. gauge track and one 10 ton and two 5 ton electric cranes on 4.572 m. gauge tracks are available. The dock can be emptied in 4 hours.

Floating Dock No. 3:

Dimensions—	Extreme length	106.680 m.
	Length on bottom	106.680 m.
	Length on keel blocks	104.546 m.
	Extreme width	26.822 m.
	Width at entrance	19.482 m.
	Height on keel blocks	1.219 m.
	Draft on keel blocks, HWOST	5.334 m.
	Lifting capacity	3,629 tons
	Crane	4 tons

REPATRIATION: All facilities available.

AIRPORT: Louis Botha Airport – 15 miles from harbour. Daily flights to Johannesburg connecting with overseas flights by regular airlines.

TIME: GMT plus 2 hours.

HOLIDAYS: New Year's Day (1st January); Good Friday, Easter Monday, Ascension Day (date varies); Republic Day (31st May); Settlers' Day (1st Monday in September); Kruger Day (10th October); Day of the Covenant (16th December); Christmas Day (25th December); Boxing Day (26th December). Cargo is not worked on Christmas day and Good Friday.

POLICE/AMBULANCE/FIRE: Police, 310-2714; Ambulance, 62333; Fire, 4123222 or 62333.

TELEPHONES: Telephones can be supplied at all berths. Arrange through Agents.

GENERAL: A copy of the Regulations for the Republic of South Africa and of South West Africa supplied gratis to Masters on arrival.

SERVICES: Tank-cleaning facilities, compass adjustments and repairs to all electronic gear can be undertaken.

SHORE LEAVE: Allowed.

AUTHORITY: South African Railways, Port Captain, Durban.

AGENT: Freight Services Ships Agency Company Limited, 16th/17th Floor – Durban Bay House, 333 Smith Street, P.O. Box 1020, Durban; Tel. No. 318174/80; Telex: 6–2540/6-0185; Cables: Seafreight Durban.

EAST LONDON: 33.02 S. 27.55 E. (See Plan Book)

PORT LIMITS: These are defined in the "Regulations for the Harbours of the Republic of South Africa" as follows:

The area of the sea bounded by a line drawn from the Nahoon Point in position 32° 59′ 50″ S. 27° 57′ 07.5″ E. in a 114° direction for 1 sea mile to a position 33° 00′ 13.9″ S. 27° 58′ 12.8″ E. thence in a 216.5° direction to a position 33° 03′ 14.46″ S. 27° 55′ 37.18″ E. and thence in a position 295° direction to the coast in position 33° 02′ 36″ S. 27° 53′ 57″ E. (All bearings are true.).

For Charter Party purposes: An "arrived ship" is when she enters the port limits.

For Harbour Revenue purposes, a vessel "arrives" when it passes into the harbour proper or upon first contact at anchorage whilst waiting for berth.

DOCUMENTS: See "Cape Town".

Immigration: Produce their own forms which are:

(a) Arrival and Departure forms.
(b) Prohibition Notice – which states all crew must sail with vessel unless officially signed off through Immigration.
(c) Medical Certificate.
(d) Advice letter from last South African port – if applicable.

They require Crew Lists and the "I" Flag to be flown until vessel cleared by Immigration Officer.

PILOTAGE: Compulsory. One hour advance notice to be given to Port Captain through VHF radio – Port Operation – calling Channel 16, working Channel 12. Pilot boats fitted with multi-channel VHF. Motor pilot boat – black hull, white housing "Pilot-Loods" painted in black on housing. Steam pilot boat – black hull, brown housing and yellow funnel. Pilot taken aboard at outer anchorage. Pilots prefer Pilot ladder and manrope system for boarding and disembarking.

RESTRICTIONS: Vessels not permitted to enter unless Agents have been appointed.

Port operates from: 0600 to 2200 hrs. Mondays to Fridays 0600 to 1300 hrs. Saturdays 0600 to 1900 hrs. Sundays. Tankers are handled in daylight only.

MAX. SIZE: Tankers: max. length 204 m. overall, draft 9.9 m.

Passenger and dry cargo vessels: max. length 239 m. overall, draft 9.9 m.

HEALTH: Pratique granted at first port of entry in South Africa. Pratique message 24 hours prior to arrival to "Port Health" at port of entry. If radio pratique not granted "Q" flag to be flown until ship has been cleared. Valid certificates must be held for smallpox and yellow fever. Ships from Eastern ports must also have valid certificates for cholera and typhoid.

Vessels will not be brought into harbour until radio pratique has been requested/granted, if this is first port of call on the South African range.

RADIO: East London Radio, call sign ZSA.

TUGS: Three tugs available. Join vessel in entrance channel. Tug's wires used at no extra charge.

BERTHING:

Wharfage	*Length (m.)*	*Depth at LWOST (m.)*	*No.*	*Cranes (electric) Lifting capacity (ton: 1,000 kg)*
East Bank				
Fish Wharf	109.7	6.1	—	
No. 2 Quay (C Berth)	205.7	10.7	—	
No. 3 Quay	359.7	9.8	1 9	10 tons 4 tons
No. 4 Quay (Hely-Hutchinson)	132.0	8.5	1 3	5 tons 4 tons
No. 5 Quay	83.8	10.7	1 14	15 tons 4 tons
No. 6 Quay	505.9	10.7		
Repair Quay	109.7	9.1	—	
West Bank				
West Quay	559.0	8.5	1 11	20 tons 4 tons
Slipway Wharf	80.2	4.6	—	
New Commercial Berths (S and T Berths)	388.1	10.7	—	
Oil Tanker Berth	259.1	10.7	—	

Containers handled at West Quay.
Ro/Ro vessels handled at No. 5/6 Quays.

STEVEDORES: No Saturday work except for refrigerated vessels in fruit season or at Port Manager's discretion.

CARGO HANDLING FACILITIES: One berth equipped for bulk loading of maize. One berth equipped for discharging bulk petroleum products. All other berths for general cargo. Grain elevator: Storage capacity 75,986 tons; loading rate 1,633 t.p.h. through 4 spouts.

MEDICAL: Unrestricted hospital facilities. Medical assistance must be arranged through Agents.

TANKERS: One tanker berth suitable for vessels of 204 m. length with maximum draft 9.9 m. Diameter of hoses, 300 mm.

DENSITY: 1025.

FRESH WATER: Delivery by hose ex-wharf hydrants. Rate of delivery 60 t.p.h.

FUEL: 48 hours notice required. Heavy Oil and Gas Oil available.

OPENING/CLOSING HATCHES: Mechanical hatches opened/closed by crew. Other types of hatches by stevedores.

CERTIFICATES:
Safety Certificates in respect of Life Saving Equipment and gear.
Radio Certificate.
Load-line Certificate.
Deratisation Certificate.
Certificate of Competent Officers (passenger ships only).

CUSTOMS ALLOWANCE: *Officers and Petty Officers:* 200 cigarettes every 4 days; 1 litre spirits; 3 litres each of beer and wine; *Crew:* 200 cigarettes every 4 days. In cases of wine drinking nations, this allowed with meals.

CARGO GEAR: All cargo handling equipment must be in good condition and certificates available for inspection.

IDENTIFICATION CARDS: Required, otherwise National Identity Cards, if available.

CONSULS:
Belgium
Denmark
France
Germany
Italy
Netherlands
Norway
Portugal
Sweden
United Kingdom

REPAIRS: All types of repairs can be undertaken.

DRY DOCKS: *Princess Elizabeth Graving Dock:*

Dimensions—Overall docking length	198.5 m.
Length on keel blocks	193.1 m.
Length on bottom	198.5 m.
Width at coping	31.2 m.
Width at entrance top	27.2 m.
Maximum width at sill level	22.9 m.
Depth on entrance sill, HWOST	10.2 m.
Depth on inner sill, HWOST	10.2 m.

A docking length of 209.2 m. can be obtained by placing the caisson in the emergency stop at the entrance.

Two 15-ton and one 5-ton electric cranes on 4.9 m. gauge track are available.

The dock can be emptied in 4 hours.

Slipway:

Extreme length	222.5 m.
Length of cradle	63.4 m.
Draft on keel blocks, HWOST:	
Forward end	3.5 m.
Aft end	6.7 m.
Capacity	100 tons

REPATRIATION: All facilities available.

AIRPORT: Ben Schoeman Airport 8 km. from harbour. Daily flights to Johannesburg connecting with overseas flights by regular airlines.

TIME: GMT plus 2 hours.

HOLIDAYS: See "Durban".

POLICE/AMBULANCE/FIRE: Police 2–5555; Ambulance 2–1212; Fire 2–1212. National Sea Rescue 22555. Harbour Police 442032.

TELEPHONES: Telephones can be supplied at all berths. Arrange through Agents.

SHORE LEAVE: Allowed. No shore pass required.

DEVELOPMENTS: Ro/Ro berth under construction, the first stage will be completed early 1979.

AUTHORITY: South African Railways. Port Captain, East London.

AGENT: Freight Services Ships Agency Company Limited, 2nd Floor, Union Arcade Building, Cnr. Union & Buffalo Streets, P.O. Box 2, East London 5200; Tel. No. 26787/8; Telex: 75–761; Cables: Seafreight East London.

MOSSEL BAY: 34.10 S. 22.09 E. (See Plan Book)

PORT LIMITS: Within a line drawn from Cape St. Blaize lighthouse to the mouth of the Little Brak River, thence along the highwater mark so as to include the foreshore between these points, together with Seal Island, the estuary of the Little Brak River as far as the tide flows.

DOCUMENTS: Refer to "Cape Town".

PILOTAGE: Compulsory. 1 hour advance notice to be given to Harbour Master and Pilot through VHF radio. Port operation calling Channel 16, Working Channel 12. Motor pilot boat – black hull, white housing "Pilot-Loods" painted in black on housing. International pilotage signals used. Pilot boards about 2 miles North of Cape St. Blaize Light.

ANCHORAGE: Open anchorage with unlimited depth.

RESTRICTIONS: Vessels not permitted to enter unless Agents have been appointed. No night berthing for tankers.

MAX. SIZE: Anchorage: no restrictions. Tankers: up to 32,000 d.w.t.

HEALTH: Pratique granted at first port of entry in South Africa. Pratique message 24 hours prior to arrival to "Port Health" at port of entry. If radio pratique not granted "Q" flag to be flown until ship has been cleared.

Valid certificates must be held for smallpox and yellow fever. Ships from Eastern ports must also have valid certificates for cholera and typhoid.

RADIO: Cape Town Radio, ZSC. Port Elizabeth Radio, ZSQ.

TUGS: 1 Pilot tug of 300 h.p. available.

TANKERS: Conventional buoy mooring designed for 32,000 d.w.t. vessels up to 204 m. length. Situated offshore at Voorbaai. No slop facilities.

Vessels use both anchors (approx. 9 shackles on each). There are 5 mooring buoys which are kept underwater when not in use. Vessels should have 10 full coils of rope. They should be well ballasted at all times as there is very little warning of strong winds which may suddenly come up.

BERTHING:

	Dimensions		Depth at LWOST		Cranes (electric)	
Wharfage	Length (m.)	Cope Level above LWOST (m.)	Max. (m.)	Min. (m.)	No.	Lifting capacity (tons)
No. 1 Jetty (2 sides) each	107	5.6	4.6	3.0		
*Low Level Wharf	61	2.6	1.7	1.7		
*No. 1 Quay	44	4.4	1.7	1.7		
*No. 2 Quay	50	4.4	2.7	2.7		
No. 3 Quay	213	3.5	6.7	5.5		
No. 4 Quay	274	3.7	7.3	7.3	3	4

*Suitable for small fishing craft only.

DENSITY: S.G. 1025.

FRESH WATER: Available along Nos. 3 and 4 quays.

FUEL: Limited supplies of Gas oil along Nos. 3 and 4 quays.

MEDICAL: Cape St. Blaize lighthouse on 24-hour watch. Requests for medical assistance passed through lighthouse to Harbour Master and Pilot.

Hospital facilities available. Vessels in port should arrange medical facilities through Agent.

CUSTOMS ALLOWANCE: See "Cape Town".

CARGO GEAR: All cargo handling equipment must be in good condition and certificates available for inspection.

IDENTIFICATION CARDS: Required. Otherwise National Identity Cards, if available.

REPAIRS: Only minor repairs can be undertaken on a 500 ton capacity slipway.

TIME: GMT plus 2 hours.

HOLIDAYS: New Year's Day (1st Jan.); Good Friday, Easter Monday, Ascension Day (dates vary); Republic Day (31st May); Settler's Day (1st Monday in September); Kruger Day (10th October); Day of the Covenant (16th December); Christmas Day (25th December); Boxing Day (26th December). Cargo is not worked on Christmas Day and Good Friday.

AIRPORT: George Airport, 40 km.

SHORE LEAVE: Allowed.

AUTHORITY: South African Railways. Harbour Master and Pilot, Mossel Bay.

AGENT: See "Cape Town".

PORT ELIZABETH: (Algoa Bay): 33.57 S. 25.39 E. (See Plan Book)

PORT LIMITS: Bounded on the Southward by a line drawn from Cape Recife, East (true) to a point in the Indian Ocean, distant 1,609 m. on the Northward by a line drawn from the extreme point of the East bank of the Zwartkops River, East (true) distant 1,609 m.; on the Eastward by a line drawn between these 2 points, and shall embrace the foreshore between high and low water marks from Cape Recife lighthouse to the aforesaid line at East bank of the Zwartkops River, including that portion of the said river which lies on the seaward side of the bridge carrying the railway line to Allicedale.

DOCUMENTS: *Customs*
Form DA.1 Report Inwards/Outwards for ships.
Form DA.3 Certificate of clearance for ships.
Form DA.4 Transire – for a destination in the R.S.A.
Form DA.5 List of sealable goods on board ship.
Ships Crew List (Customs Department).
Livestock Form (Customs Department).

Post Office
P.160 Notification of departure of vessel.
P1/27 Certificate of departure of vessel.
P1/149 Ship mail declaration.
P.21 Post Office Certificate.

Port Health
Maritime Declaration of Health.
Crew List with last vaccination dates.
Deratisation Certificate.

Port Authority
T.958 Report of Arrival.
T.962 A Departure/Shifting Notification.
Ship's Manifest.

PILOTAGE: Pilotage is compulsory. Messages addressed to Port Captain, Port Elizabeth. Initial ETA together with draft, 72 hours prior to arrival, updated 12 hours prior to arrival and confirmed with Port Control when within VHF range. VHF radio calling on Channel 16. Working frequency Channel 12.

Pilot boats fitted with multi-channelled VHF. Pilot boats black hull with white superstructure, "Pilot-loods" painted black on white. Pilot boat stationed inside harbour and meets ship on arrival approximately 2 miles East of breakwater. Boarding requirements consist of pilot ladder together with 2-manropes or pilot hoist. Pilot ladder usually rigged on starboard side of docking. Algoa Bay is considered a safe anchorage for all sizes of ships, the bottom consisting mainly of sand. Usual anchorage for ships awaiting Pilot is 2 miles Eastward of breakwater, in the outer anchorage.

Predominant winds are Westerly all the year, with East/South Easterly during the Summer months. The Westerly winds are the stronger of the two but are off land and cause little difficulty. Easterly's being from the sea are inclined to cause an uncomfortable sea.

ANCHORAGE: See "Pilotage".

RESTRICTIONS: Vessels not permitted to enter unless Agents have been appointed.

Dry-cargo ships 0600 to 2200 hrs. Pilot must be aboard by 2030 hrs.

Vessels which are considered *not gas free* are restricted to daylight entry only.

MAX. SIZE:

	Max length	*Draft*
Passenger and dry-cargo vessels	Subject to Port Captain's prior approval	10.6 m.
Tankers	203.3 m. overall	9.8 m.
Ore carriers	251.5 m.	11.6 m.

HEALTH: Pratique granted at first port of entry in South Africa. Pratique message 24 hours prior to arrival to "Port Health" at port of entry. If radio pratique not granted "Q" flag to be flown until ship has been cleared.

Valid certificates must be held for smallpox and yellow fever. Ships from Eastern ports must also have valid certificates for cholera and typhoid.

RADIO: Port Elizabeth Radio. Call sign ZSQ.

VHF: See "Pilotage".

TUGS: Three "Z-Peller" diesel tugs available, fitted with radar and VHF. Tugs join between anchorage and harbour entrance. Tug's wires used at no extra charge.

BERTHING:

Wharf	*Dimensions* *Length (m.)*	*Cope level (m.)*	*Depth at LWOST* *Max. (m.)*	*Min. (m.)*	*Cranes* *No.*	*Lifting capacity (tons)*
Charl Malan Quay	423	5.2	11.0	11.0	16	4
2 Container berths	635	5.2	12.2	12.2	3	40
East Quay	400	5.2	12.2	12.2	—	—
No. 2 Quay	519	5.2	11.0	11.0	15 2	4 15
No. 3 Quay	518	5.2	10.0	7.0	16 2	4 15
Bulk Handling Quay	360	5.2	12.2	12.2	1 2 ship loaders	4
Tanker berth	242	3.7-4.6	9.9	9.9	—	—
Trawler quay	136	3.4	5.5	5.5	—	—
Fish wharf	101	3.4	4.0	0.9	—	—

Developments:

2 container berths with combined length of 635 m. are in use along Charl Malan Quay. The container wharf cranes have been commissioned.

Back-up area 22 ha with 3,800 ground positions for deepsea container traffic and 7 ha with 1,000 trailer positions for coastwise container traffic available since 1978.

10 straddle carriers and 16 haulers and trailers commissioned.

A rail terminal for forwarding and receiving containers to and from inland destinations will form an integral part of the container terminal.

Entire project due for completion in October 1980. Ro-Ro facilities for end-loading of coastwise traffic in use.

Facilities for side-loading of deepsea Ro-Ro traffic available.

BULK HANDLING FACILITIES: *Ore Loading Plant:* Storage capacity approx. 460,000 tons. Rated loading capacity 1,360 t.p.h. Ore loaders:

Maximum outreach from quay face	19.35 m.
Extreme elevated height of loaders above HWOST	13.92 m.

MEDICAL: Unrestricted hospital facilities. Medical assistance must be arranged through Agent.

TANKERS: Diameter of lines 1×300 mm; 2×250 mm and 2×150 mm. Max. length 203.3 m. Max. draft 9.8 m.

DENSITY: 1025.

FRESH WATER: Delivery by hose ex wharf hydrants. 160 t.p.h.

FUEL: 48 hours notice required. Bunker fuel and gas oil available at ore berth. Fuel oil only available at Tanker Berth.

CUSTOMS ALLOWANCE: 200 cigarettes per man. Only officers allowed 1 bottle spirits.

CARGO GEAR: Undertaken by shore cranes. No floating crane available.

STEVEDORES: To be arranged through ship's agency.

IDENTIFICATION CARDS: Required. Otherwise National Identity Cards, if available.

CONSULS:

Belgium	Tel.	46561	Italy	Tel.	52 1461
Denmark	,,	41 3489	Netherlands	,,	21986
Germany	,,	49711	Norway	,,	52 2021
Greece	,,	25634	Portugal	,,	48451
France	,,	531505	U.K.	,,	52 2160

REPAIRS: Minor deck and engine room repairs.

DRYDOCKS: Nil. Electrically operated 1,200 ton slipway; depth on keel blocks F. 3.7 m.; A. 7.5 m. HWOST; telescopic cradle 75.4 m. long, minimum length 44.3 m. Max. length of ship 82 m. and max. beam 12 m.

SURVEYORS: All classification societies represented.

GANGWAY/DECK WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: Shipmaster to liaise with stevedores.

REPATRIATION: All facilities available.

AIRPORT: 4 km. from harbour. Regular daily S.A. Airways flights to and from all major centres.

TIME: GMT plus 2 hours.

HOLIDAYS: New Year's Day (1st January); Good Friday, Easter Monday, Ascension Day (dates vary); Republic Day (31st May); Settlers' Day (1st Monday in September); Kruger Day (10th October); Day of the Covenant (16th December); Christmas Day (25th December); Boxing Day (26th December). Cargo is not worked on Christmas Day and Good Friday.

POLICE/AMBULANCE/FIRE: Police (City) 10111, Police (Harbour) 520-2280; Ambulance 2-22311; Fire 2-1555.

TELEPHONES: Telephones can be supplied at all berths. Arrange through Agents.

IDENTIFICATION CARDS: No passes issued.

SHORE LEAVE: Allowed.

DEVELOPMENTS: See "Berthing".

AUTHORITY: South African Railways. Port Captain, Port Elizabeth.

AGENT: Freight Services Ships Agency Company Limited, African Eagle Centre, Main Street, P.O. Box 1108, Port Elizabeth. Tel. No. 523620. Telex: 574–7181. Cables: Seafreight Port Elizabeth.

RICHARDS BAY: 28.48 S. 32.06 E. (See Plan Book)

LOCATION: The port is located some 200 km. North of Durban. Mid point of the bay is approximately 28° 48′ S. and 32° 02′ E.

DOCUMENTS: The following documents should be prepared and ready on berthing:

Port Health:
1 Maritime Declaration of Health.
1 Vaccination List.
1 Crew List.
1 Valid Derat Certificate.

Immigration:
3 Crew Lists.

Customs:
2 Crew Lists.
1 Ship's Stores List.
1 Crew Declaration of Bonded Stores, etc.

Agents:
2 Crew Lists.
Loading Certificate.
Safety Radio Certificate
Safety Equipment Certificate.

Customs: All vessels using the port, will be subject to Customs Inspection and must obtain a Customs Clearance.

PILOTAGE: Pilotage is compulsory and Pilots are provided by the Marine Department of South African Railways and Harbours.

Boarding points are determined by the Pilot, but generally speaking will be within an area approximately 5 km. East of the Harbour Entrance.

At the present time vessels can only enter and leave during daylight. Later this position will be reviewed to consider a 24 hour service.

Vessels with freeboard in excess of 30 ft. must have accommodation ladder rigged in addition to the pilot ladder.

ANCHORAGE: 3 to 5 miles off Port but not opposite Entrance (precise area not yet demarcated).

Quality of Bottom: Sandy.

Note: Anchorage is similar to Durban and in high S.W. winds anchorage is safe, but in high N.E. winds caution should be exercised.

MAX. SIZE:

LOA Max. 314 m. Beam max. 47.25 m. Draft max. 17 m. D.W. Limit max. 150,000 d.w.t.

Minimum Ballasted Condition on Entry:

Length	*Draft – Fore*	*Draft – Aft*
600 ft.	20 ft.	24 ft.
700 ft.	25 ft.	28 ft.
800 ft.	26 ft.	30 ft.
900 ft.	27 ft.	32 ft.
over 900 ft.	28 ft.	34 ft.

HEALTH: Radio Pratique can be obtained by cabling Port Health – Durban using the standard international procedure for working. See "Radio".

RADIO: *Arrival Advice:*

To "Porthealth Richardsbay" – direct through Durban Radio – 24 to 48 hours prior arrival – advising ETA, last port, date sailed, number of crew, full inoculation/vaccination status, and state of health of crew, and requesting Radio Pratique. Porthealth will cable vessel directly, either granting pratique or requesting further details. These messages are free of charge.

To "Portcaptain Richardsbay" – direct through Durban Radio – 48 hours prior arrival, advising ETA, draft, freeboard and reason for call at Richards Bay.

VHF: Vessels can communicate with Port Control, on Channel 16 VHF watch is maintained continuously. When at anchor, listening watch should be kept to receive berthing instructions.

TUGS: Tug attendance is compulsory.

Tugs are owned and operated by South African Railways and Harbours and consist of the following:

1. Voigth Schneider	4,200 h.p. Bollard Pull 43 tons.
2. Diesel Electric	2,270 h.p. Bollard Pull 30 tons.

BERTHING: Line boats are provided by the Harbour Authorities, as are berthing gangs.

Coal Terminal:

Berths No's 301 & 302 are used solely for the export of South African Steam Coal. The plant is owned and operated by the Richards Bay Coal Terminal Company (Pty.) Ltd.

Length	700 m.
Depth	19 m.
Quality of bottom	Sandy to hard
Density of sea water	Between 1000/1025 (Fresh to salt)
Height of quay above HWOST	3.2 m.

Shiploaders: Two. (Dimensions apply to one machine)

Loading capacity (nominal)	6,500 m/t.p.h.
Loading capacity (average)	3,500 m/t.p.h.
Loading capacity of Trimmer	3,000 m/t.p.h.
Working Range of Boom	15° up to 15° down
Height of Boom above HWOST with Loader in best working position	21.0 m.
Height of Boom above HWOST with Loader at max. working elevation	21.6 m.

Clean Cargo Berth:

On the North side of the harbour 1,300 m. of quay wall has been constructed and commissioned (Berths 609 and 701 703: height of quay above HWOST 3.2 m. Quality of bottom, sandy.)

Berth 609	length	300 m.
	depth	12.8 m.
Berth 701	length	300 m.
	depth	12.8 m.
Berths 702/703	length	700 m.
	depth	19 m.

Berths 701–703 have been equipped with 8×4 ton wharf cranes and 5×15 ton cranes as well as rail tracks and adequate back-up areas.

A phosphoric acid terminal with a storage capacity of 36,000 tons is located behind the quay and tankers are loaded at a rate of 1,200 tons per hour via means of pipe manifolds at Berth 703.

A very substantial multi-purpose bulk handling facility is being developed behind Berths 701-703 for the import of sulphur, petroleum coke and alumina. The terminal, which is partially completed, and comprises truck tipplers, silos, open and covered storage, conveyors, etc. is at present handling the export of zircon, rutile, titanium slag and pig iron by means of the wharf cranes. Large modern bulk off-loading facilities as well as a belt loader are planned.

Berth 609, which is served by rail tracks and an adequate surfaced area is currently being used for the import of heavy lift cargoes.

Berth 703 has been provided with a pipe-line to load bulk phosphoric acid ex-storage tanks. Max. pumping rate 2,000 t.p.h.

MEDICAL:

Hospital: There is a modern and well equipped hospital at Empageni. (Approx. 25 km. from the berth).

Doctor/Dentist: Usual port services available on 24 hour basis.

DENSITY: 1026.

FRESH WATER: Fresh water is available at the berth. Rate approx. 25 t.p.h.

FUEL: Heavy and Medium Fuel Oil. Diesel Oil and Gasoil are available by pipe-line at the berths 301 and 302 only. Bunkering can take place concurrently with loading.

Stems for bunkers should be placed with normal bunker suppliers who will arrange delivery through the Bunker Supply Company at Richards Bay. All vessels calling for bunkers must either be gas free or inerted before they will be permitted to enter the port.

CONSULS: In Durban.

REPAIRS: Written approval must be obtained from the Port Authorities, via the Agents for vessel to immobilise engines to carry out repairs. Repairs may be carried out at the berth.

SURVEYORS: Lloyds, ABS, BV and NV in Durban.

GANGWAY/DECK WATCHMAN: Recommended.

OPENING/CLOSING HATCHES: By crew.

CUSTOMS ALLOWANCE: Customs, on vessels berthing, allow each member of the crew 200 cigarettes. They normally allow also 1 part bottle spirits and 8 cans (or dumpy bottles) of beer to each officer. No alcohol allowed for rated crew members except in the case of vessels belonging to countries where provision is made for wine in the statutory list of rations.

REPATRIATION: Possible.

AIRPORT: There is an airport at Richards Bay 26 km from the Coal Berth, and there are 2 flights per day to Durban, where international connections can be made.

HOLIDAYS: *Local Holidays:*

New Year's Day, 1st January; Good Friday; Easter Monday; Ascension Day; Republic Day, 31st May; Settler's Day, 6th September; Kruger Day, 10th October; Day of the Covenant, 16th December; Christmas Day, 25th December; Family Day, 26th December.

Where such a holiday falls on a Sunday, the Monday following becomes a Public Holiday.

TIME: GMT plus 2 hrs.

POLLUTION: The Port Authorities demand that no vessel using the port shall discharge any garbage, refuse, vegetable or food matter, deck cleanings polluted bilge water, oil or rubbish of any description in the vicinity of or in the port of Richards Bay.

Heavy penalties will be imposed for breach of the regulations.

Vessels arriving in Ballast must have clean ballast on board, as deballasting takes place alongside the berth. Dirty ballast pumped into the harbour will incur heavy penalties for pollution.

TELEPHONES: Telephones are available at the berth. Application for the service should be made through the Agents in advance.

All telephone calls made will be charged to the vessel's account.

Caution: With direct dialling available internationally it is strongly recommended that telephones are placed in the custody of a responsible officer to avoid abuse.

SHORE LEAVE: There are no restrictions on shore leave for crew. Entertainment in the Richards Bay area is very limited. Durban, 2.5 hours drive away, however, can offer very much more.

IDENTIFICATION CARDS: Seaman's Book sufficient.

DEVELOPMENTS: The development of the town and surrounding areas is taking place rapidly together with large scale industrial and commercial developments.

Apart from the development of the extensive multi-purpose bulk handling terminal behind Berths 701-703 the Richards Bay Coal Terminal Company are expanding their handling and storage facilities behind Berth 302 and this company will have an export capacity of 20 million tons of coal per annum by 1979.

The construction of a chemical tanker berth immediately North of the coal terminal has commenced. The tanker berth, to be known as Berth 209 will have a designed depth of −12.8 m. and will be capable of handling 50,000 d.w.t. tankers. The berth is scheduled for completion in September 1979 and will initially be confined to the import of butadiene.

GENERAL: The harbour and the quays are owned by South African Railways and Harbours.

Provisions: Stores and provisions can be obtained through local Ships Chandlers.

Game Parks: National Parks Board Game Reserves (Hluhluwe and Umfolosi) are within easy reach of Richards Bay by car.

Car Hire: Cars can be hired, through the Agents at reasonable cost to officers and responsible crew members only. An International Driving Licence is required to make use of this service.

Navigational Aids: Lighthouse (500,000 candlepower) to be constructed North of the harbour at position 28° 48′ S., 32° 06′ E.

Leading lights – Front 28° 47′ 24.725″ S., 32° 02′ 44.711″ E.

Breakwater tip lights (2 flashes per 5 secs.) South light Red, North light White.

Tides: Tidal change between HWOST and LWOST is approximately 2 m.

Prevailing Winds: South Westerly; North Easterly.

SHIPMASTER'S REPORT: December 1978.

Pilotage: Compulsory.

Restrictions; At the present time vessels cannot enter or leave during the hours of darkness. However, 24 hour service is under consideration. Vessels able to dock and un-dock at any stage of the tide.

Max. Size: 155,000 d.w.t. LOA 314 m., beam 47.25 m., and max. draft 17 m.

Tugs: Three tugs available.

1. Voight .Schneider 4,200 h.p. Bollard pull 43 tons.
2. Diesel electric 2,270 h.p. Bollard pull 30 tons.
3. Steam, Bollard pull 25 tons.

Radio: Richard's Bay Signal Station and Port Control.

VHF; Channels used 16, 9, 11, 12, 13 and 14. Pilot and Port Authority on Channels 16 and 12.

Berthing: Distance from entrance to berth 3.5 miles. Maximum size 155,000 d.w.t., length 314 m. and max. draft 17.1 m.

Hours of movements within the port, 0600 hrs. to 1630 hrs. A multi-purpose bulk handling appliance is presently being erected. There are 8 cranes of 4 tons capacity and 5 cranes of 15 tons capacity available. No Ro/Ro facilities. No floating crane available. Port not geared to handle palletised cargoes.

Consuls: Nearest Consuls in Durban.

Facilities Available: Fresh water; Fresh provisions; Repairs (limited); Machine ship (limited); Airport; Lloyd's Surveyor; Salvage Surveyor (from Durban); Laundry service; Bunker fuel oil and diesel oil (at coal berth); Lubricating oils; Doctor and hospital; Groceries and Meats.

AUTHORITY: South African Railways, Port Captain, Richards Bay.

AGENT: Freight Services Ships Agency Company Limited, P.O. Box 247, Richards Bay. 3900. Telephone 5225, 5319. Telex: 6–0434. Cables: Baybulk.

SALDANHA BAY: 33.02 S. 17.58 E. (See Plan Book)

DOCUMENTS: *Port Health:*

1 Maritime Declaration of Health.
1 Vaccination List.
1 Crew List.
1 Valid De-ratting Exemption Certificate.

Immigration:

3 Crew Lists only.

Customs:
1 Crew List
1 Ship's Stores List.
1 Crew Declaration.
Agents:
2 Crew List.

Customs: Arrangements have been made with Customs that loading shall commence before Customs Entry is completed. Customs will normally board on arrival for the purpose of checking and sealing Bonded stores, etc.

Immigration: On arrival at the port, any vessel which is not cleared by Immigration shall show the 'I' flag. No persons may disembark or embark without the express permission of the Immigration Officers until such time as Immigration formalities have been completed.

PILOTAGE: Pilotage is compulsory at Saldanha Bay, and is undertaken by fully qualified Master Mariners employed by the South African Railways and Harbours.

APPROACHES: Masters of vessels are warned not to proceed too close to the shore line in the vicinity of Saldanha Bay harbour, nor to enter the S.B.H. limits without a Pilot. The Wasserfall Bank situated between Jutten and Malgas Islands across the entrance to the outer bay constitutes an unmarked hazard. The recommended position to embark the Pilot is North Head light × 050°T (ships in ballast only). Distance 2 nautical miles but *not* in any circumstances closer to the Saldanha Bay harbour limits.

Ships in loaded or part loaded condition should board Pilot in position North Head light 030° distance 3 nautical miles.

MAX. SIZE: LOA, 350 m. Draft, 21.25 m.

HEALTH: Vessels requesting free pratique should cable Port Health, Cape Town, via Cape Town Radio (ZSC) at least 24 hours before arrival. There is no charge for messages addressed to Port Health. When free pratique cannot be granted, then the vessel will be required to show the 'Q' flag on arrival and will be boarded by Port Health Inspectors at the anchorage in Saldanha Bay.

RADIO: Saldanha Bay will be served by Cape Town Radio (ZSC).

Arrival: Vessels calling at Saldanha Bay to load ore will be required to send their ETA 96 hours prior to arrival, stating the approx. tonnage of ore required, the type of ore and the loading programme. Further messages will be required to be sent at 48 hours and 24 hours prior to arrival, updating the ETA. These ETA's are to be sent via Cape Town Radio (ZSC) addressed to Port Captain, Iscor Maritime Co-ordinator and also to the Agent. In addition, VHF contact on Channel 16 or MF on 2182 kHz must be established as soon as possible with Port Control. As pilotage is lengthy, arrangements to dispatch pilot vessel must be made at least 3 hours before ETA.

Vessels calling at Saldanha Bay after leaving Cape Town will be required to send by telex their ETA 24 hours before the expected time of arrival at Saldanha Bay, together with their final tonnages of cargo required, type of ore and loading programmes.

With the final 24 hour ETA the Master will be required to provide the draft forward and aft, and the de-ballasting time required on arrival. If there is any change to this programme a further message should be despatched as soon as possible after any such change is known.

48 hours prior to arrival, in addition to the updated ETA, the vessel must indicate her requirements, i.e. fuel, fresh water, other services to Port Captain, Iscor Maritime Co-ordinator and the Agents. Final advice of loading programme:

1. Quantity
2. Grading
3. Sequence

to be provided at least 24 hours before Notice of Readiness is given. Failure to provide this information may result in a delay of 12 hours before loading commences. Vessels are to request docking instructions from Port Control 6 hours before arrival. Instructions will be given promptly and concisely.

Vessels will be loaded in regular turn subject to cargo availability and Charter Party Lay Days, providing they berth with hatches open and are ready for loading in all respects.

VHF: *Port Control:* Saldanha Bay Port Control is equipped with VHF and contact can be made direct using Channels 16, 12, 11, also MF 2182.

Tugs: The tugs operate with VHF Channels 1 – 28 and 60 – 88, and radio telephone.

TUGS: There are 3 tugs stationed in Saldanha Bay Harbour operated by the S.A.R. & H. Each tug is propelled by Voith Schneider gear, and is of 4,000 h.p. and 42 ton bollard pull.

BERTHING: The jetty construction is of the caisson type, spanned with a deck construction between the caissons. The total jetty length is 991.65 m. and the total mooring length available will be 650 m. for iron ore loading vessels and 310 m. for oil tankers at a depth of 23 m. below chart datum. Vessels can be accommodated on both sides of the jetty and the jetty is equipped with adequate quick release hooks and fenders.

The design of the jetty makes provision for the mooring of 350,000 d.w.t. loaded vessels with a max. theoretical approach speed of 18 cm./sec. In practice, the approach speed of a vessel will be limited to between 10 and 12 cm./sec. as a maximum. The approach speed and relative position of a vessel to the jetty will be measured by docking sonar equipment, suitably positioned on the jetty and information will be relayed to the Pilot by means of light indication, radio and a portable instrument.

The width of the dredged area is 260 m. maximum on either side of jetty, tapering to 220 m. at the oil jetty, 380 m. at No. 4 Buoy and 400 m. at No. 1 and 2 Buoys.

A turning basin with a diameter of 580 m. and a depth of 23.20 m. below CD is provided in the navigational channel, seaward of the jetty.

From the turning basin seawards the depth of the navigational channel increases to 23.45 m. CD and eventually to 23.70 m. CD in the section marked by buoys. From the outer buoys the depth increases from 24 m. to 45 m. at the outer harbour approaches.

Loading: Bulk ore loading will be effected by means of two luffing, slewing and travelling ship loaders, together capable of loading continuously at a rate of 8,000 t.p.h. average, with a peak rate of 10,000 t.p.h.

MEDICAL: *Hospitals:* There is a fully equipped hospital in Vredenberg, 13 km. from Saldanha Bay. Serious medical cases, however, will normally be referred to one of the hospitals in Cape Town.

Doctors: There are several doctors available in Saldanha Bay and nearby Vredenberg. To expedite appointments, however, and to arrange for attendance on board, Agents should be consulted.

Dentist: There are several dentists available in the area, and in order to expedite appointments, Agents should be consulted.

AIRPORT: International Airport near Cape Town. Military airport locally but special landing rights have to be applied for.

FRESH WATER: Fresh water will be delivered at the rate of 35 t.p.h., and at a cost of 45 cents per kilolitre. Application for the supply of water should be made to Port Captain through the Agents.

FUEL: Bunkers, not yet available ex jetty.

CONSULS: There are no Consulates established in Saldanha Bay, but the following countries are represented at Cape Town:

Argentina
Australia
Austria
Belgium
Bolivia
Brazil
Canada
Chile
China (Taiwan)
Denmark
El Salvador
Finland
France
Germany
Greece
Holland
Italy
Japan
Monaco
Norway
Panama
Peru
Portugal
Rhodesia
Spain
Sweden
Switzerland
United Kingdom
U.S.A.
Uruguay

CUSTOMS ALLOWANCE: Customs normally allow 200 cigarettes per person. No alcohol allowed for crew but one part bottle and 8 cans of beer allowed for each Officer on arrival. Re-issues are made every 4 days.

HOLIDAYS: The following are recognised Public Holidays in the Republic of South Africa:

New Year's Day, January 1st; Good Friday; Easter Monday; Ascension Day; Republic Day, May 31st; Settlers' Day, September 4th; Kruger Day, October 10th; Day of the Covenant, December 16th; Christmas Day, December 25th; Boxing Day, December 26th.

Should any of the abovementioned days fall on a Sunday, the following Monday is observed as a Public Holiday.

These do not affect Ore/Oil Cargo operations, working 24 hours per day, 365 days per year.

TELEPHONES: Telephone facilities are available from the jetty. In order to obtain a telephone, however, arrangements will have to be made by the Agents. In this respect we would point out that many foreign countries have direct dialling facilities with South Africa, and in all cases arrangements should be made for lockable telephones to be placed on board, and the use of that telephone placed under the control of the Master.

GENERAL: *Removal of Rubbish:* Arrangements are available for the removal of rubbish and can be made through the Agents.

Weather: The climate is temperate. Average high temperatures year round are 20°C (68°F) and average low temperatures are in the region of 11°C (52°F). Sea water temperatures average 16°C. Prevailing winds in Summer are SSE'ly and in Winter NW'ly. Rainfall figures are approximately 300 m.m. per annum. Saldanha Bay is a Winter rainfall area. Fog occurs generally in the March to August period. Currents – there are no sea or thermal currents in the harbour area. Tidal currents generally will not exceed 0.05 km./hr.

Currency: The standard unit is the Rand. One Rand divided into 100 cents. Exchange rates vary, but for practical purposes at the time of writing, one can use the figure of $1.12 equals R1.

Electricity: Can be made available ex jetty on application to S.A.R. & H. via the Agents.

Compressed Air: Will be available ex quay on application to S.A.R. & H. via the Agents.

Cranes: A mobile crane will be made available through S.A.R. & H. via the Agents.

Ship Chandlers: Local Chandlers now operating.

Sporting Facilities: Can be arranged for all sports through the Port Captain in co-operation with Military and Naval Authorities in area.

DEVELOPMENTS: New 250 m. quay to be constructed on West side of causeway for shipping ore concentrates and general cargo. Cranes will be available. Due completion January 1980.

Dredging works in progress on approach channel to new quay which will be at 12.50 m. Quay will handle ships of 30,000 d.w.t. initially.

SHIPMASTER'S REPORT: 1977 (Vessel – 150,000 d.w.t. OBO)

Port Limits: A line drawn between North Head and South Head lighthouse. Vessel considered arrived after passing these limits. Notice of Readiness accepted when first hatch open ready for loading or when berthing completed if vessel docks with open hatches.

Documents: Request Radio Pratique 48 hours before arrival giving (1) Name and Nationality of Vessel (2) Last Port (3) Destination (4) Health condition on board (5) Number of crew and passengers (6) Type of cargo or in ballast (7) ETA.

Pre-arrival cable via ZSC Capetown to Iscor Vredenburg, Port Captain Saldanha and the vessel's Agents.

Advise ETA 96, 48 and 24 hours out and if any changes. With 24 hours ETA, or earlier if available advise Agents:–

(a) Final stowage required and types of ore. (Hatch Totals).
(b) Loading sequence. (Hatch Runs, Trimming stops, etc.).
(c) Deballasting time required.
(d) Drafts on arrival, estimated drafts on sailing.
(e) Whether OBO vessel and whether or not in possession of gas-free certificate.
(f) On vessel's first call – Summer d.w.t., LOA, breadth from foremost hatch coaming to bow, aftermost hatch coaming to stern, distance upper gangway platform to stern and whether leading forward or aft. Advise agents all requirements 48 hours pre-arrival.

Port Papers: 4 copies Crew and Passenger list.
3 copies report inward DA1 to DA3 (Agents supply).
1 Crew declaration.
1 Store list.
1 Slop chest list.
1 Livestock list if applicable.
1 Gasfree Certificate.

If vessel's last cargo oil and no gasfree certificate on board, Agents will arrange if pre-advised, chemist comes from Capetown.

Pilotage: Compulsory. Pilot boards off North Head but in practice comes some way to seaward to meet vessel. Cutter is a rakish red craft capable of 23 knots, fitted VHF, all normal Channels. IMCO regulation pilot ladders required complete with manropes. There is only 1 Pilot in the port.

Anchorage: Vessels are not permitted to anchor in the bay and swell and depth of water make the area to seaward unsafe: Pilot advises anchoring in Saint Helena Bay if extended anchorage is anticipated.

Restrictions: Vessels with drafts up to 21.00 m. can be handled at high tide and the ports largest vessel to date (9/77) was a 250,000 tonner. When the developments are complete it is expected that vessels of at least 350,000 d.w.t. can be handled.

Pratique: See "Documents".

Radio: ZSC Capetown for messages, and the Port Radio Service on arrival.

Radar: Decca 50S surveillance radar system in Port Control Office, manned 24 hours – VHF communication.

Tugs: 3 Voith Schneider tugs of 3,960 b.h.p. each. Tugs connect to vessel in berth approaches. Tugs lines at no extra charge.

Berthing: Vessels berth against Yokohama fenders on either East or West side of quay. Ordinary moorings but extra moorings available on hire during infrequent heavy swell conditions. Vessels are always swung to berth head out. There is apparatus for indicating vessel's approach velocity.

Handling Facilities: 2 ore loaders nominal capacity 10,000 t.p.h., 1 loading and the other placed for next run. Actual load rate about 7/8,000 t.p.h.

Medical: Services available. Advise through Agents pre-arrival. Small hospital at Vredenburg and extensive facilities in Capetown, 1.5 hours away.

Tankers: No facilities. VLCC berth being constructed to seaward on continuation of ore jetty.

Density: Salt – 1025.

Fresh Water: Available ex-jetty at about 40 t.p.h. Ship's crew connect hose.

Fuel: Not available at present. Small stocks of diesel and gasoil. Presume heavy oil could be supplied by coaster ex-Capetown if pre-arranged.

Repairs: Small repairs are possible locally. Major repairs can be handled from Capetown, Globe Engineering have a branch at Saldanha. If vessel has urgent repairs pre-arrange attendance with Agent. *Note:* Permission is required to immobilize main engine. Also advantageous to pre-arrange.

Surveyors: Available on request from Capetown for all Societies.

Watchmen: Not required, but readily available.

Customs Allowance: (Period of 4 days) – Local officer enforces allowances.

Master: 230 gm. tobacco (any form), 1 litre spirits (any form), 3 litres of wine, 3 litres beer or stout.

Officers and Petty Officers: 173 gms. tobacco, 1 litre of spirits, 3 litres wine, 3 litres beer.

Crew: 115 gm. tobacco, no spirits, no beer, 3 litres wine.

Wine only permitted on ships where wine is part of rations – French, Italian, Spanish vessels etc.

Repatriation: Readily available, 1.5 hours in car to Capetown, thence by International air network. Due regularity of crew changes off Capetown there are competing courier services etc., so very few delays. Hotel accommodation is available Saldanha if required.

Time: South African Standard.

Holidays: Port operates through 365 days a year.

Police/Ambulance/Fire: Through loading foreman's Walkie Talkie.

Telephones: Not available.

Services: Cleaning gangs, riggers, watchmen, etc. readily available.

Shore Leave: Saldanha town 10 miles from dock.

Identity Cards: Not required.

B/L Figures: By survey of ship's drafts. Vessels are not permitted to submerge their Plimsoll Lines, avoid sag or shortshipment inevitable.

General: Provisions and laundry available from Capetown, cable in, lorries permitted on dock provided no interference with operations. Service technicians also available from Capetown.

Trip to and from Capetown regularly and routinely undertaken by all and sundry involved at Saldanha, but to avoid time loss and delay ensure that wherever possible contractors and Agent are aware of requirements.

AUTHORITY: The South African Railways and Harbour Administration.

AGENT: See "Capetown".

WALVIS BAY (South West Africa): 22.57 S. 14.30 E. **(See Plan Book)**

PORT LIMITS:

The area bounded on the West by a line drawn from Pelican Point Lighthouse to a point North (true) for a distance of 4 km; on the North by a line from this point drawn East (true) to the mainland; together with the foreshore therein and the jetties, harbour works and harbour lands vested in the Government of the Republic of South Africa. For the purposes of calculating port charges a vessel is regarded as an "arrived ship" when it enters the dredged channel in Walvis Bay Harbour or when the vessel anchors in the port limits.

DOCUMENTS:

Customs:
Form DA. 1 – Report Inwards/Outwards for ships;
DA. 3 – Certificate of Clearance for ships;
DA. 4 – Transire – for a destination in R.S.A.;
DA. 5 – List of Sealable goods on board ship;
Ship's Crew List (Customs Department);
Livestock Form (Customs Department).

Post Office:
Form P. 160 – Notification of Departure of Vessel;
P. 1/27 – Certificate of Departure of Vessel;
P. 1/149 – Ships Mail Declaration;
P. 21 – Post Office Certificate.

Port Health:
Maritime Declaration of Health;
Crew List with last vaccination dates;
Deratisation Certificate.

Port authority:
Form T 958 – Report of Arrival;
T 962 – Departure/Shifting Notification;
T 942 – Clearance Certificate;
Ship's Manifest.

PILOTAGE: Pilotage is compulsory. The vessel's Master must radio his ETA to his local Agent, who completes form T.958 for submission to the Port Authority.

Channel 16 on VHF radio can be used to call the Port Control Office. Pilot boats are normally black with a white superstructure and have a yellow funnel with horizontal green stripes.

The Pilot boards at a point approximately 1 km. from the Fairway Buoy (entrance channel buoy) in the direction of the Bell Buoy (Pelican Point Spit Buoy).

The Pilot will inform the Master by means of the VHF on which side the pilot-boarding ladder and manropes are required.

ANCHORAGE: Varying in depth from 9 – 14 m. at LWOST. Bottom – sand and silt. (Please also see "Africa Pilot" Vol. II).

RESTRICTIONS: The movement of Oil Tankers and vessels carrying explosives or dangerous goods are restricted to daytime hours. The maximum permissible draft is 9.4 m.

MAX. SIZE: Draft of vessels is the major restricting factor (9.4 m.). The maximum permissible length at the tanker berth is 192 m.

HEALTH: Same procedures apply as at R.S.A. ports.

RADIO: Call sign ZSV. VHF radio in Port Captain's Office.

VHF: VHF Radio is used by Pilots and Channels 11, 12 and 13 are available.

RADAR: Radar is fitted to the harbour tugs and pilot boats. The Port Captain's Office is awaiting installation of port operations Radar.

TUGS: Two first-class tugs equipped with radar, wireless telegraph and telephone direction-finding apparatus and salvage and fire-fighting appliances; 2 Pilot boats and 1 launch.

Tugs normally join a vessel in the entrance channel and are secured by means of the tugs' wires. There is no charge levied for the use of the tugs' lines.

BERTHING:

Wharf	*Length*	*Depth at LWOST*	*Cranes No.*	*Cranes Capacity*
Berths 1, 2 & 3	487.68 m.	10.06 m.	5	4 tons
(Working Portion 457.2 m.)			1	15 tons
Berths 4–8	926.6 m.	10.67 m.	22	4 tons
			1	15 tons

BULK-LOADING FACILITIES:

(i) Travelling ore loader for handling zinc, lead and copper concentrates for export. (This appliance is privately owned).

(ii) Privately-owned Bulk Fishmeal Loaders.

(iii) A fish-oil pipe-line at Berths 1, 2 and 3.

SPECIALISED CARGO-HANDLING FACILITIES: Ro/Ro berth will be introduced early 1979. Container stacking area and 2 container stacking cranes presently under construction for completion October 1978. Ships gear will still be required for loading and unloading containers. Liquid chemicals are handled in tank containers.

STEVEDORES: Stevedoring is undertaken by private enterprise and stevedores are appointed by Ships' Agents.

MEDICAL: Hospitals are available but prior arrangements have to be made with Agents for medical assistance.

TANKERS: See "Max. Size" and "Restrictions".

Tankers up to 192 m. in length can be accommodated. Depth alongside 10.06 m. at LWOST.

Storage and pumping facilities are privately owned.

DENSITY: 1025.

FRESH WATER: Available and delivered by hose ex-wharfside – hydrant at 15 t.p.h.

FUEL: Diesel fuel is available but heavy oil is only available if special arrangements are made with the local oil companies.

FIRE PRECAUTIONS: When berthed alongside a wharf or jetty, a ship having explosives or any other goods of a dangerous nature, the Master shall, if the Port Captain so directs, have a fireman in attendance, the cost whereof shall be borne by the Owner of the ship and the Master of any such ship shall also, at the expense of the Owner of the ship, adopt such other or further precautionary measures as the Port Captain may consider reasonably necessary for ensuring the safety of the harbour, the ship or the cargo.

CONSULS: Norwegian and Belgian Consulate.

REPAIRS: Undertaken by private enterprise on a small scale.

DRY DOCK: There are no dry-docks available at this port. A syncrolift with a lifting capacity of 2,000 tons, maximum permissible length of 80 m. and a depth of 10 m. is operated and owned by the Department of Sea Fisheries.

SURVEYORS: Available for various classification societies.

GANGWAY/DECK WATCHMEN: Arrangements have to be made with vessel's Agents to secure services of gangway/deck watchmen.

HATCHES: Arrangements have to be made with stevedores in connection with opening/closing of hatches.

CUSTOMS ALLOWANCE: As per Customs Tariffs.

CARGO GEAR: Loading/discharging of cargo is effected by means of shore cranes.

REPATRIATION: All facilities available.

AIRPORT: The nearest International Airport is at Windhoek 445 km. from Walvis Bay.

TIME: GMT plus 2 hours.

HOLIDAYS: New Year's Day (1st January); Good Friday; Easter Monday; Ascension Day; Republic Day (31st May); Settlers Day (first Monday in September); Kruger Day (10th October); Day of Covenant (16th December); Christmas Day; Boxing Day (26th December).

Cargo is now worked on Saturdays, Christmas Day and Good Friday.

POLICE/AMBULANCE/FIRE: South African Police Tel. 2055; Ambulance Tel. 3441; Fire Department; Municipal: Tel. 3117; South African Railways: Tel. 8-200.

TELEPHONES: Arrangements have to be made with Post Office to have a telephone connected.

SERVICES: Tank-cleaning, compass adjustments and minor-repairs can be undertaken.

SHORE LEAVE: Allowed.

REGULATIONS: A copy of the Regulations for the Republic of South Africa and of South West Africa are supplied gratis to Masters on arrival.

DELAYS: Dependant on weather conditions.

AUTHORITY: South African Railways and Harbours Administration, Port Captain, Walvis Bay.

AGENT: W. Woker Freight Services (Pty) Limited, 166 Third Street East, P.O. Box 4, Walvis Bay. Tel. 2211/8; Telex: 56-747; Cables: Freights Walvis Bay.

NOTES

Please also advise Shipping Guides Ltd.

South Atlantic Islands

ASCENSION ISLAND, GEORGETOWN:

07.55 S. 14.20 W.

DOCUMENTS: Crew and Passenger lists, Health documents, Manifests and Bills of lading if discharging cargo.
PILOTAGE: No pilots are available and not required as it is an open anchorage. Require 48 hours notice of ETA. Ascension Radio operated by Cable & Wireless will reply.
RESTRICTIONS: None – but if vessel has not been here before it would be advisable to wait until daylight.
ANCHORAGE: Only 1 ship can anchor at a time. There is 14 fathoms of water in the anchorage and vessels of 28,705 tons have used this anchorage. The other anchorage used by tankers is at English Bay and there is a special berthing procedure which the Oil Company give to Captains of tankers.
HEALTH: Pratique should be requested when giving the ETA and will be granted by either Cable or VHF.
RADIO: If coming from the North via Freetown Radio, and from the South via Cape Town. VHF Channel 16 available.
TUGS: No tugs available.
BERTHING: Open anchorage only, no berthing alongside.
MEDICAL: Facilities available, if possible 48 hours notice required. There is a 12-bed hospital in Georgetown and a second for American personnel at the U.S.A.F. Base. Inoculation, vaccination and yellow-fever certificates not required. Other than Government personnel no one is allowed to land on Ascension without an entry permit.
TANKERS: Only 1 berth available at anytime.
FRESH WATER: None available.
FUEL: None available.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Usually done by stevedores.
CONSULS: No Consulates. British Administrator attends to all requirements.
REPAIRS: Only minor repairs can be effected.
REPATRIATION: No facilities for crew changes. Repatriation can be arranged but only in the case where a person has been hospitalised. If a ship puts in with a medical case on board an M.O. will visit the ship. Fees paid to the Cable & Wireless representative. If the patient is hospitalised the Master must guarantee in writing that all hospital fees and the air fare to Antigua will be honoured by his shipping line Agent. As so few ships call at Ascension no hospitalised patients can be evacuated by sea. All patients received from ships are evacuated on M.A.C. flights to Antigua. These flights are run weekly.
AIRPORT: Airport 2 miles. U.S.A.F. No civil airlines call here.
TIME: Always GMT.
HOLIDAYS: Cargo vessels are discharged during public holidays – no night work.
GENERAL: There are no facilities for visitors on the island. Anchorage must be vacated when a mail vessel is due.
SHORE LEAVE: Not permitted.
AUTHORITY: The Administrator.

FALKLAND ISLANDS, PORT STANLEY:

51.50 S. 58.56 W. **(See Plan Book)**

PORT LIMITS: West of the line joining Mengeary Point and Cape Pembroke.
DOCUMENTS: Crew Lists, Passenger Lists, Customs, Health Documents, Manifests, Bills of Lading, Ship's Papers, Ship's Certificates.
PILOTAGE: Pilotage should be requested via Cable & Wireless Radio Station. 24 hours notice of arrival required. Frequency 2182.
ANCHORAGES: For large vessels, the anchorage is somewhat confined; except S. of Navy Point, where there is good swinging room in depths of from 8.2 m. to 10.4 m. (27 ft. to 34 ft.), it is necessary for a long vessel to moor. There is good anchorage N.N.E. of the cathedral, but, owing to the prevailing strong W. winds, a vessel may have some difficulty in turning, when leaving this position. The best time to leave is after 1800 hrs. or before 0800 hrs. as, unless there is a widespread area of bad weather over the islands, the wind, which is local, is seldom strong between these hours. The holding ground is good, and vessels have not dragged during winds of up to force 8, though a second anchor is often necessary.

The bottom of the harbour is stiff mud, which is very noisome and sticky; it is necessary to allow plenty of time for cable washing when weighing.

Two oil barges and numerous small boats, none of which exhibit a riding light at night are moored at the South side of the harbour.
RESTRICTIONS: No restrictions on entry.
RADIO: Cable & Wireless Ltd.
RADAR: No port radar service.
TUGS: No harbour tugs.
BERTHING: Falkland Islands Company jetty with a depth of 1.5 m. at its head. T shaped Head.
CRANES: 1 × 5-ton crane.
BULK CARGO FACILITIES: Nil, drummed cargoes only are handled.
STEVEDORES: 1 week's notice required. If Falkland Islands Company charter vessel (4 voyages a year) is being worked then stevedores will not be available until work on the charter vessel has been completed.
MEDICAL: Advance notice required.
TANKERS: Advance information should be sought.
DENSITY: Full salt water.
FRESH WATER: Available at night. Delivery by direct hose. Cost £1 per ton +33% of the cost of the labour involved.
FUEL: Fuel is available only by special arrangement with the Ministry of Defence. Grade 47 Cetane (viscosity cSt 100° F – 1.8; s.g. at 15° C – 0.840). Delivery by lighter and pump.
FIRE PRECAUTIONS: Normal safety requirements.
CONSULS: Norwegian, Uruguayan.
REPAIRS: Minor repairs to machinery.
DRY DOCKS: Nil.
SURVEYORS: Not available.
GANGWAY/DECK WATCHMEN: Recommended.
OPENING/CLOSING HATCHES: By ship's crew.
CUSTOMS ALLOWANCE: Quantity permitted by crew is one bottle of spirits, 200 cigarettes or 1 lb. of tobacco, 6 bottles of wine, 1 case (24 cans) beer.
CARGO GEAR: There is 1×5-ton crane. Ships gear may be used.
REPATRIATION: With a twice weekly Air Service repatriation could be arranged.
AIRPORT: 5 miles from Port. Feeder airlines connect with Comodoro Rivadavia, Argentina.
TIME: GMT minus 4 hours. Summer time from October to end of March.
HOLIDAYS: Cargo can be handled on the 10 public holidays.
POLICE/AMBULANCE/FIRE: Police – 95; Fire – Exchange; Ambulance 54 (2 rings).
TELEPHONES: Connection possible at rate of £20 a year.
SHORE LEAVE: Allowed.
IDENTIFICATION CARDS: Seamans book sufficient.
REGULATIONS: No particular or unusual regulations.
DELAYS: Delays may be experienced if berthing alongside only commercial jetty if firms charter vessel is being handled. Four voyages a year: – turn around 1 week.
DEVELOPMENTS: No port developments under way.
AUTHORITY: Harbour Master.

ST. HELENA, JAMESTOWN: 15.56 S. 05.40 W.

PORT LIMITS: Within 3 miles radius of the port. Laytime commences at the anchorage.
DOCUMENTS:

3 copies of Crew List.
3 copies of Passenger List.
10 copies of Manifest.
1 Health form.

PILOTAGE: No official pilot. Agents sometimes hire a Pilot for ships requiring one.
ANCHORAGE: The harbour consists of an open roadstead with anchorages shown on charts.
MAX. SIZE: Any size vessel can enter the Port. There is little rise and fall of tide and current negligible.
HEALTH: Pratique will be granted by the boarding party or by telegram from Port Health Officer. If suspected disease or fever, the Port Health should be informed by telegram in advance of anchoring so that the necessary precautions can be taken.
RADIO: Name: St. Helena Radio. Call sign for W/T working – ZHH. Frequencies: 500 and 461 kHz. A2, A1. 12963.5 kHz. A1. Working Hours: 500 and 461 kHz – Weekdays from 0800 to 2000 GMT. Sundays from 0800 to 1300 GMT. 12963.5 kHz – Daily except Sundays from 1200 to 1300 GMT. Listening watch on Channel 5 and Channel 6.

Call sign for R/T working – St. Helena Radio. Frequencies: 2182 and 3162 kHz A3H, A3J and A3A. 4397.7, 8737.5 and 13150.4 kHz. A3J A3A. Working Hours: 2182 and 3162 kHz – Weekdays from 0800 to 2000 GMT. Sundays from 0800 to 1300 GMT. 4397.7, 8737.5 and 13150.4 kHz are only operated on request and ships should answer on Channels 414, 807 and 1217 respectively.
TUGS: None. There are 3 towing launches (from 16 to 28 h.p.) for harbour use only.
BERTHING: Vessels anchor in 18–20 fathoms offshore, in open roadstead. There is deep water (sufficient for ocean-going vessels) right into the area where cargo lighters and other small craft are moored.
STEVEDORES: 48 hours notice required by Agent, also particulars of tonnage of cargo.
MEDICAL: Agent should be notified if medical attention required. A resident staff of three doctors, plus nursing staff, in a well-equipped modern hospital. The basic requirements for intending visitors is a certificate of vaccination against smallpox.
FRESH WATER: Delivered by floating pipeline at a rate of approximately 14 t.p.h.
FUEL: No stocks of marine fuel. Ordinary diesel oil is available in drums of 45 gallons (supplied ex South Africa) and only limited stocks for local needs are held.
OPENING/CLOSING HATCHES: Stevedores can do this, but preferable for crew to open on arrival so that work can start as soon as stevedores arrive on ship.

NOTES

Please also advise Shipping Guides Ltd.

CERTIFICATES: Vaccination certificates required for all crew. Derating certificate should be valid.
CUSTOMS ALLOWANCE: No restrictions. Free use on board.
CARGO GEAR: All discharge carried out by vessels derricks into lighters. Agents provide own cargo nets, etc. There is one 30-ton shore crane.
CONSULS: French Consul. Appointed representatives for Denmark and Norway.
REPAIRS: Small repairs can be carried out (welding or turning pipes, etc.).
REPATRIATION: No facilities for crew changes. Only for those left behind for hospitalisation.
AIRPORT: No airport on St. Helena.
TIME: GMT throughout the year.
HOLIDAYS: New Year's Day (1 January); Good Friday; Easter Monday; St. Helena Day (21 May); Whit Monday; Queen's Official Birthday; August Bank Holiday; Christmas Day (24 December); Boxing Day (25 December). Cargo work can be arranged except on Christmas holidays.
POLICE/FIRE/AMBULANCE: No telephone numbers. Must ring exchange.
SHORE LEAVE: Allowed. No restrictions provided vessel has free pratique.
DELAYS: No delays in berthing. Loading or discharge can be delayed by bad weather due to swell alongside wharf.
AUTHORITY: Harbour Master.

Spain

AGUILAS and HORNILLO: 37.24 N. 01.35 W. (See Plan Book)

DOCUMENTS: See "Almeria".
PILOTAGE: Hornillo port has no Pilot. The Pilot of port of Aguilas which is less than a mile from Hornillo, does pilotage services of both. To enter both ports Hornillo and Aguilas, anchor mile or a mile and half distance from entrance of Aguilas. Wait for Pilot with engine stopped. To call Pilot give three long blasts several times. Pilot's launch is small motor boat painted white, with letter "P" painted on both sides of boat. During night it carries white light on top of mast, and 8 ft. lower a red light, besides the usual lights.
RESTRICTIONS: It is not possible to enter Hornillo port during dark. Wait till dawn outside Aguilas.
MAX. SIZE: Length up to 145 m., draft about 29 ft.
HEALTH: See "Almeria".
TUGS: None in port. Not necessary for either port.
BERTHING: Aguilas port has a commercial quay with a berth area about 265 m. and depths of between 8–12 m. Hornillo port has a pier to handle minerals with berth area of 90 to 100 m. and depths between 6–10 m.
BULK HANDLING: Two conveyor belts each of 100 tons grain per hour capacity. May be used for other bulk cargoes.
STEVEDORES: Team of stevedores who belong to "Port Workers' Trade Unions" (Sindicato de Obreros Portuarios).
MEDICAL: Captain can send cables to consignee requiring this kind of service. There are a number of doctors and a hospital.
FRESH WATER: Available by pipe-line at berths.
FUEL: There are no supplies of fuel in either port.
GANGWAY/DECK WATCHMEN: Not necessary, usually this is done by crew.
OPENING/CLOSING HATCHES: Usually this is done by crew.
CONSULS: There is only Vice-Consul of Norway in Aguilas. Tel. 411035.
REPAIRS: No facilities.
REPATRIATION: Facilities for effecting crew changes exist. Repatriation can be done by train to Madrid and by plane from there.
TIME: GMT plus 1 hour.
HOLIDAYS: See "Almeria".
POLICE/AMBULANCE/FIRE: Ambulance and fire services can be requested from Port Authority. If the police services are required call to "Caseta de Vigilancia" of the Civil Guard in either port.
GENERAL: Hornillo port is used only for loading and discharge of minerals, and for this purpose a pier is provided with a railway. The nearest port of Aguilas, less than a mile distant on the West, is the commercial port, with a quay for loading/discharging and a crane of 10 tons capacity.
SHORE LEAVE: Crew members are allowed ashore.
AUTHORITY: Ayudante de Marina o Capitan del puerto (Port Authority or the Assistant) Aguilas.

ALGECIRAS: 36.07 N. 05.26 W. (See Plan Book)

DOCUMENTS:
Maritime Declaration of Health.
5 Crew Lists.
2 Manifests of Cargo for the Port.
2 Manifests of Cargo in Transit (if coming from Spanish port a Manifest is sent by the Customs officials of that port).
1 Bill of Lading of cargo for the port.
2 Ship's Stores Lists.
2 Lists of Crew Personal Effects.
If the vessel carries passengers the following are required:
8 Lists of Passengers Disembarking with baggage declaration for each passenger.
5 Lists of Passengers in Transit.
2 copies of Arrival Report.
1 Manifest of Vehicles belonging to Passengers Disembarking.
If the vessel is a tanker the following are required:
Certificate of Quantity of Cargo.
Certificate of Quality of Cargo (or Ballast Certificate).

PILOTAGE: Vessels entering the port call Pilot by international code signals, sound or light. Notice of ETA should be radioed to Agent 72, 48 and 24 hours before arrival. Pilots cannot be contacted by radio, and are ordered by Agents on the basis of Master's ETA.

Pilot boat is painted white with a letter "P" in black on both sides. By day they carry a blue flag with the letter "P" in white. By night they carry regulation pilot lights. The pilot boarding zone is a circle of 0.5 mile radius with centre 1 mile East of the Northern breakwater head (red light).
ANCHORAGE: Vessels waiting for a Pilot may anchor North of the parallel of the Barranco beacon in depths of 30 m.
RESTRICTIONS: Vessels may enter by day or night.
MAX. SIZE: Puerto de Algeciras – no length restrictions, max. draft 29 ft. Refineria Gibraltar – maximum length 283 m. Draft up to 65 ft.
HEALTH: Free pratique is obtained automatically when authorities board on arrival and Maritime Declaration of Health is completed. In case of suspected disease or fever on board full details should be sent by radio to Sanidad Maritima, Algeciras, before arrival.
RADIO: Aranjuez Radio and Cadiz radio. Vessels proceeding to Refineria Gibraltar should announce their arrival by VHF to the Capitania of the port using Channel 16 for calling and Channel 13 for communication.
TUGS: Four tugs are available up to 1,500 h.p. and assist according to Pilot's directions. Ship's tow lines used.
STEVEDORES: Ordered by vessel's Agent on basis of Master's ETA.
MEDICAL: Doctors and hospital facilities available. International vaccination certificates only required if vessel is proceeding from an infected area.
TANKERS: Refineria Gibraltar – 5 berths for tankers up to 283 m. length, 2 of which can accept draft up to 65 ft. The other 3 berths can accept vessels up to 57 ft. draft. Loading/discharge lines are 12 in., 10 in., 8 in., 6 in. and 4 in. Refineria Gibraltar has 2 slop tanks each of 600 cu. m. capacity which can accept oily residues.
FRESH WATER: Available from all berths in Algeciras and at Refineria Gibraltar at a rate of 40 t.p.h. Can also be supplied by barge at the rate of 15 t.p.h.
FUEL: All grades can be supplied with 3 hours notice. Loading rate 250 t.p.h. for fuel and 150 t.p.h. for diesel and gas oil. Supply is effected by barge at all quays which are not connected by pipe-line.
DEVELOPMENTS: In Algeciras Commercial Port a new berth is under construction in the South part of the dock for vessels up to 9 m. draft. It is planned to dredge the whole commercial port to 10 m. depth.

A new container terminal has been inaugurated, total length of berth 498 m.
GANGWAY/DECK WATCHMEN: Not available from shore.
OPENING/CLOSING HATCHES: Opened and closed by ship's crew.
CUSTOMS ALLOWANCE: Max. quantity of tobacco permitted in ship's stores is 3 kilos per crew member and 2 kilos per passenger. The quantity that may be held out of bond is 40 grammes tobacco per person per day. Wine/Spirits. 1 decilitre per person per day may be held out of bond.
CONSULS:

Great Britain	tel. 67.14.50	Germany	tel. 67.22.37
Morocco	tel. 67.36.98	Denmark	tel. 67.27.95

Norway, Italy, France, all tel. 67.27.20.
REPAIRS: Small repairs afloat can be effected. No dry docks.
AIRPORT: Nearest is at Malaga, 120 kms. from Algeciras.
TIME: GMT plus 1 hour all the year round.
HOLIDAYS: New Year's Day, 6th January, 19th March, Maundy Thursday, Good Friday, Easter Saturday, 1st May, Ascension Day, Corpus Christi, 29th June, 18th July, 25th July, 15th August, 1st October, 12th October, 1st November, 8th December, 25th December.
POLICE/FIRE/AMBULANCE: *Algeciras:* Police, tel. 67.15.55; Fire, tel. 67.20.20; Ambulance, tel. 67.22.90. *Refineria Gibraltar:* Police, tel. 67.15.55; Fire, tel. 76.17.00; Ambulance, tel. 76.12.47.
SHORE LEAVE: Crew members are permitted to go ashore subject to police control.
AUTHORITY: Comandancia de Marina.

ALICANTE: 38.23 N. 0.28 W.

PORT LIMITS: The line drawn from Cabo de las Huertas and Cabo de Santa Pola.
DOCUMENTS:
3 Crew Lists.
6 Passenger Lists.
2 Manifests for Cargo, including cargo in transit as well as cargo for Alicante. Tobacco and Cargo Manifests to be visaed by Spanish Consulate in port of origin.
3 Stores Lists, for Customs.
For the Agent
4 Manifests of cargo destined for Alicante, with one copy of each Bill of Lading.

PILOTAGE: Pilotage service is permanent and Pilots are summoned by displaying international code flag "G", (same signal at night-time by light), or by sounding three long blasts on ship's whistle. Pilot also on VHF Channel 16.

Pilot launch is a white-painted motor launch with a black letter "P" on both sides. The launch flies a black flag with white letter "P" by day, and shows usual pilot lights at night. The launch will meet arriving vessels about 1 mile from breakwater entrance in good weather.

In bad weather from the East, the launch goes out as far as the breakwater and meets vessel opposite the green light at the breakwater head. Pilot boards on the lee side, which is generally the port side.
ANCHORAGE: Vessels waiting to enter port may anchor at a distance of 0.5 mile East of the breakwater in depths of 16 m.
MAX. SIZE: Vessels of up to 225 m. length and 33 ft. draft can be berthed alongside. For tankers, max. draft. 29 ft.
HEALTH: Report in advance to Pilot if there is any problem. If situation is normal, then after ship berths the health inspector boards and quickly grants pratique. In the event of any suspected disease or fever on board the Pilot (without boarding) will show the anchorage area then Health Inspectors and Authorities will board and give necessary instructions.

Vessels entering after calling at another Spanish port have no problems obtaining pratique.

RADIO: Radio-telephone communication through Radio La Costera, Alicante, medium range approx. 220 miles and short range approx. 40 miles.

Port Radio station situated at the Western end of Muelle B, is equipped only to receive messages by R/T. Messages received by this station are passed to destinations within the port by telephone lines. VHF communication in operation.

TUGS: Only 1 tug available to assist berthing of 176 g.t. and 1295 h.p. Normally ship's lines used for connection with tug.

BERTHING: The breakwater extends in a S.W. direction and vessels berth within the breakwater. Max. depth being available at the outer end of the breakwater, decreasing in the N.E. direction.

Muelle 14: Extends along the length of the N.E./S.W. breakwater and depths vary alongside the berth from 11 m. at the S.W. end to 8 m. at the N.E. end. Depths in the outer port vary from 12 m. at the S.W. end to 9 m. at the N.E. end.

Muelle 12: Depth alongside 7.5 m., depth for the berth 9 m.
Muelle 10: Depths alongside the berth vary from 6 to 8.75 m.
Muelle 9: Depth alongside berth 8.75 m.
Muelle 7: Depth alongside berth 8.75 m.
Muelle 11: A combined tanker and dry cargo berth. Depth alongside berth 8.75 m.

STEVEDORES: Agents should be advised of ETA and shore cargo gear requirements.

Grain Discharge: effected by grabs normally at Muelle 11. Discharge 3 to 4 tons per gang per hour.

General Cargo: discharge about 10 tons per gang per hour.

Bagged Cargo: discharge about 150 tons per gang per hour.

MEDICAL: Many hospitals and medical services available.

TANKERS: Tankers discharge takes place at Muelle 11 (see "Berthing"). There is no refinery and the only products unloaded are fuel oil. diesel oil, gasoline and aviation spirit. There are 3 pipelines available for cargo discharge.

DENSITY: 1025.

FRESH WATER: Available from hydrants at the quays at the rate of 10 t.p.h., per hydrant.

FUEL: Supplied by Campsa. Vessels requiring fuel are requested to berth alongside Muelle 11 and will incur delays if that berth is already occupied. Maximum advance notice is essential. Owners of vessels requiring fuel are required to pay a bank deposit in foreign currency.

GANGWAY/DECK WATCHMEN: Agent normally arranges watchmen.

OPENING/CLOSING HATCHES: Normally opened by crew and closed by stevedores using cranes.

CUSTOMS ALLOWANCE: Total tobacco allowed on board, 3 kilos per crew member, 2 kilos per passenger. All must be declared in ship's provision list and any in excess of these amounts declared in a separate visaed manifest as tobacco in transit (see "Documents").

CARGO GEAR: All berths have cranes, varying from about 6 tons capacity. There is 1 heavy lift crane capacity 30 tons, and 1, capacity 10 tons.

REPAIRS: Only minor repairs available. If dry docking, or undertaking major repairs, vessels should proceed to Cartagena.

AIRPORT: About 8 km. distance from Alicante, and serviced by international flights.

IDENTIFICATION CARDS: Additional identification cards only required by crew members of communist-flag ships.

TIME: GMT plus 1 hour.

TELEPHONES: Telephones may be connected, provided sufficient notice is given, subject to payment of installation costs of about 7,500 Pts. plus the cost of calls.

AUTHORITY: Comandante Militar de Marina.

ALMERIA: 36.52 N. 02.30 W.

DOCUMENTS:

4 Crew Lists.
4 Passenger Lists or negative.
2 Cargo manifests of goods destined to Almeria, as well as other cargoes in transit.
Store List in duplicate, including tobacco, spirits, radios, etc., belonging to vessel.
Details list in duplicate of all personal effects of crew and passengers (tobacco, spirits, cameras, radios, etc.).

Note: Tobacco. In case vessel carries more than 3 kilos of tobacco per man, excess must be declared in a separate manifest, which must be visaed by a Spanish Consul. In absence of Consul, said document will have to be visaed by an Authority of former port of clearance. Otherwise, the vessel would be fined.

PILOTAGE: Compulsory, service is permanent. Pilots board vessels by motor-boat in roads, near entrance formed by two breakwaters. This entrance is 287 m. wide. Pilot boats are painted white and letter "P" is painted in black on each bow. Also boats have a blue flag hoisted on mast, with letter "P" in white on both sides of flag. At night, boats have white light, under this light is a red light. When weather is bad vessels approach as close as possible to entrance so that Pilot can easily board the vessel.

ANCHORAGE: When harbour is congested, vessel can anchor at West Mole while waiting for berth.

MAX. SIZE: Only limitation is draft (max. 30 ft.).

HEALTH: Pratique is obtained immediately after berthing, when Health Officer boards vessel, In case of suspected disease or fever on board Master must send a radio message to Agents, in order that they advise the Health Officer. Following documents are required by Health Officer upon berthing: Maritime Declaration of Health, Deratisation Certificate, 1 Crew List.

RADIO: Nearest important radio stations are Cadiz-Radio and Palos-Radio.

VHF: Call Almeria Radio on Channel 16 for connection with pilot station.

TUGS: One available but not compulsory, is employed according to Master's requirements.

BERTHING: Prior to ship's arrival and in accordance with Master's ETA Agent attends Port Authorities to procure a proper available berth. Commercial quays have a length of 500 m. with double sheds, 360 m. with single shed with max. depth 24–25 ft., and about 700 m. uncovered for goods in bulk with depth between 24–30 ft.

Iron Ore Berth: Max. size 38,000 d.w.t. Max. draft 11.0 m. 1 ship loader, rate 2,000 t.p.h.

STEVEDORES: It is necessary that Master sends ETA so that Agent can inform Receiver's stevedores accordingly and arrange for proper reception of cargo and berth. Timetable of shifts available at the port; Daytime, normal working hours, from 0800–1200 hrs. and 1400–1800 hrs. (1 shift), 0800–1400 hrs. (1 intensive shift), 1400–2000 hrs. (1 intensive shift). Night time, from 1800 to 2400 hrs.; Sundays and holidays, from 0900 to 1200 and 1400 to 1800 hrs.

MEDICAL: Medical facilities are available; only it would be appreciated for Master to send a radio message if a crew member is in need of urgent medical attention.

FRESH WATER: Always available. Deliveries from quay available at all berths, supplying about 30 t.p.h.

FUEL: Ordinary fuel oil and gas oil is available at local refinery of "Campsa". It is advisable that Shipowners stem bunkers through their own Contractors, with an ETA of 48 hours, so that the order can be received in time.

FIRE PRECAUTIONS: Tankers perform their operations at the berth of "Campsa" at East Pier, which has the necessary fire precautions. No special precautions at other piers.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: This work normally carried out by crew.

CERTIFICATES: Vessel should have the usual documents on board, but only the Safety Wireless, Safety Equipment and Deratisation Certificates are required by Authorities.

CUSTOMS ALLOWANCE: The quantity allowed per each crew member is 3 kilos tobacco. (See "Documents".) Wine and/or Spirits: Only one bottle for each crew member.

CARGO GEAR: All commercial piers are served by electric shore cranes able to lift 3/6 tons (18 cranes in total), and one crane with a lifting capacity of 15/25 tons situated on Pier Costa.

IDENTIFICATION CARDS: Not required.

CONSULATES:

Denmark, Alvarez de Castro 22	tel. 212245
Sweden, Alvarez de Castro 22	,, 212245
Belgium, Paseo Generalismo 151	,, 214455
Holland, Paseo Generalismo 151	,, 214455
Finland, Aguilar Martell 7	,, 215954
Italy, Paseo Generalismo 18	,, 215790
France, Avenida Vivar Tellez	,, 220050
Colombia, Navarro Rodrigo 18	,, 213171
Panama, Jaul 27	,, 220073

REPAIRS: All types deck and engine repairs available.

REPATRIATION: Good facilities available.

AIRPORT: Airport is located about 6 km. from town, well served by regular airlines.

TIME: GMT plus 1 hour.

HOLIDAYS: 1st January; 6th January; 19th March; (St. Joseph) Good Thursday afternoon; Good Friday; 1st May (Labour Day); Corpus Christi; 29th June (St. Peter and St. Paul); 18th July (National Holiday); 15th August; (Ascension Day); 12th October; 1st November; 8th December; 25th December and 26th December (second Christmas Day).

POLICE/AMBULANCE/FIRE: Police 214081; Ambulance 215780; Fire 220044.

AVILES: 43.35 N. 05.56 W. (See Plan Book)

DOCUMENTS:

3 Crew Lists.
2 Passenger Lists or a negative.
1 Cargo Manifest of goods destined for the port.
Another Manifest covering transit cargo.
2 Store Lists, including tobacco, cigars, cigarettes, coffee, spirits, radios, cameras, etc., in possession of crew. In all cases make and number of radios to be indicated.
Safety Wireless Certificate and Safety Equipment Certificate.

If vessel carries over 3 kilos tobacco per crew member, the excess to be declared in a separate manifest, which must be visaed by the Spanish Consul at the last port, otherwise vessel exposed to heavy fine.

PILOTAGE: Telegrams to be sent to Corporacion de Practicos, San Juan de Nieva – Aviles Tel. 563013 or 566856.

Send ETA 2 hours in advance, confirming by VHF when vessel some 10 miles off. Pilots listen continously on Channels 16 and 12. When vessel in sight of lookout, give preferably audible signals in accordance with International Code. Pilot craft are painted black with a white "P" on each side and cabin. They are equipped with VHF and listen out on Channel 12, having also available Channels

16, 14, and 6. When coming alongside a vessel they hoist the "H" flag. Normally they remain within the port, going out to vessels up to 1 mile from La Forcada.

ANCHORAGE: Outside the port vessels can use the sector between N.W. and W.N.W. of La Forcada and at a distance of 0.5 mile from it, in 15 to 25 m. depth and sandy bottom. There are no sheltered anchorages. When awaiting a berth, vessels must remain at anchorage with one or two anchors.

RESTRICTIONS: Entrance channel 90 m. wide, 1,000 m. long up to San Juan de Nieva Dock. Depth at low water from 6 to 9 m.

MAX. SIZE: Length 150 m., draft 9 m.

HEALTH: Yellow flag to be hoisted, and once Health Authority has boarded, and the Marine Health Certificate completed, provided this is negative, clearance is automatic. This also applies if vessel is arriving from another Spanish port.

Health documents required: Marine Health Declaration if coming from another country, but if from another Spanish port, the Health Clearance Document from that port suffices.

Deratting certificate, or exemption certificate.

If coming from country where epidemic is in force, certificates of vaccination for each crew member.

If sickness on board, patient will be examined immediately and decision taken as as to clearance or isolation.

RADIO: If the vessel has short wave radio, messages can be sent to Aviles, but via Aranjuez Radio, Cadiz Radio, Teneriffe Radio (EAC 2/5) and Vigo Radio (EAF 2/5). If close to the coast, and medium wave radio is available, then messages can be sent to any of the other Spanish coastal stations. Messages sent purely with the telegraphic address "Pilots" are sent on by telephone to the Pilotage Authority.

TUGS: 5 tugs available up to 1,800 h.p.

BERTHING: 10 berths available.

Berth	*Length (m)*	*Depth (m)*
Raices	822.84	8.0
S. San Juan	300.00	6.0
W. San Juan	277.70	3.5
S.W. San Juan	90.25	2.0
New Fish Quay	303.00	5.0
Aviles Fish Quay	515.94	2.0–1.0
E. Ensidesa	300.00	9.0
E. and S. Ensidesa	715.00	7.0
S. Ensidesa	107.50	5.0
Endasa	132.84	7.0

CUSTOMS ALLOWANCE: Normally Customs permit 200 cigarettes per man out of bond. Additional quantities needed on the stay of ship in port. 1 bottle of spirit per man.

DRY DOCKS: 1 dock at Las Canteres, owned by Entrecanales Y Tavora, length 50 m., width 9.50 m. Capacity 600 tons.

FRESH WATER: Supplies available in the San Juan de Nieva zone and at Ensidesa Quay in San Agustin Dock.

FUEL: Fuel and gas-oil can be supplied by barge at 200 t.p.h.

AIRPORT: Asturias Airport — 15 km. from the port under the control of the Aviles Customs Office at the airport.

TIME: GMT plus 1 hour, except during Summer when GMT plus 2 hours.

HOLIDAYS: Work can be arranged on 6th January, 19th March, 15th April (from 1400 hrs. onwards), 19th April, 28th August, 27th May, 29th June, 8th September, 12th October, 16th July (Mercantile Marine).

No work available on 1st January, 16th April, 1st May, 17th June, 1st November, 8th December, 25th December.

Important notes: The above dates refer to 1976 and does not show, since they fall on Sundays, 18th and 25th July when no work is available. It should be borne in mind that these are movable holiday dates, and amongst those on which no work is available are Good Friday, Corpus Christi, and those when work can be arranged are Holy Thursday, Easter Monday, Ascension Day.

POLICE/AMBULANCE/FIRE: Police 561646 and 561174.

AUTHORITY: Junta del Puerto de Aviles.

BARCELONA: 41.25 N. 02.10 E. (See Plan Book)

DOCUMENTS:

(1) Manifest of Barcelona cargo: 1 set covering all loading ports; make sure that this manifest is in perfectly good order before ship's berthing, as Customs will board the vessel immediately and take it away as it is; thereafter any omission or excess of pages may lead to a fine. It is important that the Master has copies as Manifests mailed by Agents in loading ports sometimes arrive too late or not at all.

(2) Manifest of Transit Cargo: 2 sets (same recommendations as above).

(3) 3 Crew Lists.

(4) 1 Negative of Passengers.

(5) 2 sets of Bills of Lading of the Barcelona cargo.

(6) 2 Provisions Lists.

Of items (3), (4) and (6) above several copies will be required for distribution among various authorities, therefore it would be well for the Master to have at least 3 copies of each ready at hand on arrival. Tobacco allowed per crew member is 3 kg.

All tobacco in excess of the 3 kg. allowed by the Spanish authorities should be manifested and signed by the Spanish Consul at the last port of call before Spain. If there is no Spanish Consul at the last port before calling at Spain, then the consulate of a country friendly to Spain or the port authorities could carry out the same formality. The same procedure must be followed when the vessel loads a cargo of tobacco for discharge in Spanish ports, or when the tobacco cargo is loaded in transit.

If any item of cargo manifested for Barcelona should be discharged in error at any other port in the ship's itinerary before arrival at Spain, there would be a fine imposed here for shortage of goods if no advice of such shortage is given before arrival.

PILOTAGE: Pilot boats painted black, with letter "P" in white on each bow. Telegraphic address: "Pilot Station-Barcelona". Required notice of ETA 24 hours before arrival. Signals to be made by vessels requiring Pilot: the letter "G" in sound and/or light.

Pilot boats have no radar and are reluctant to venture more than just outside port entrance in poor visibility. Pilots give priority to vessels nearest port entrance. Pilotage is compulsory and the service is permanent. In case of port congestion vessels remain at anchor at the roads.

ANCHORAGES: In the Outer port for small vessels only, with depths over 50 ft. Also at the roads 0.5 miles away from breakwaters where vessels usually remain at anchor.

MAX. SIZE: Only limitation is draft: max. 39 ft.

HEALTH: Pratique obtained immediately after berthing, when Health Officer boards vessel. In case of suspected disease or fever on board Master must send a message to Agent, to advise Health Office. Following documents are required by Health Officer upon berthing; Maritime Declaration of Health, Deratisation Certificate, 1 Crew List.

RADIO: Aranjuez Radio, call sign EAD.

VHF: Barcelona Radio can be contacted on VHF Channel 16, 3 hours before arrival and Channel 26 for long distance calls.

TUGS: Tugs join vessel at entrance of port. Usually use ship's lines; if tug's lines used usual charge 10% of official tariff. It is normal for 2 tugs to be used for vessels from 5,000 to 15,000 g.r.t.

10 tugs available, from 800 h.p. to 1,800 h.p.

BERTHING: Commercial quay, length 12,100 m. and depths min. 8 m. max. 14 m. dependent location. Depth alongside Grain Elevator in Pier Contradique is 37 ft. Pier Barcelona, berths for transoceanic maritime passenger traffic, depths 26 ft. and 31 ft. Shore fenders keep vessel about 1 m. off quay.

CARGO-HANDLING FACILITIES: For unloading grain, there is a silo with a 65,000 ton storage capacity, provided with 4 suction pumps capable of unloading vessels at a rate of 400 t.p.h. and loading rail or road trucks at the rate of 200 t.p.h.

Liquid methane reception and gasification plant with a storage capacity for 249,000 cu. m. of liquid gas. Potash reception and loading plant with mechanical loading bridges which can load up to 450 t.p.h. of this product.

General cargo handling is fully mechanised and, apart from the pier cranes, there are fork-lift trucks, truck cranes and a palletisation process.

A container wharf with a berthing frontage of 365 m. increasing to 1,115 m., 14 m. water depth, 9.8 acres surface area, with a capacity for 1,250 20-ft. containers. 2 cranes available at 50 tons and reach of 35 m. There will be a terminal with berthing space for 6 ferries for operating a roll-on/roll-off service.

TANKERS: There are 6 berths for oil tankers, max. size 60,000 d.w.t., discharge rate 1,000 t.p.h., depth alongside 12 m. (2), 11 m. (2), 8.5 m. (2). Diameter of loading lines 4 in. and 8 in., diameter of discharge lines 10 in., 12 in. and some of 18 in.

There is 1 natural liquid gas berth, depth alongside 12 m.

There are 5 berths for inflammable liquids, asphalt, vegetable oil and tallow, depth alongside 12 m.

STEVEDORES: *(a)* Daytime, normal working hours, from 0800–1200 and 1400–1800 hrs. (1 shift); *(b)* 0800–1400 and 1400–2000 hrs. (2 "intensive" shifts). Night-time, from 2000–0200 and 0200–0800 hrs. (2 intensive night shifts). Extra costs are involved for intensive shifts. Nightwork is paid on an overtime basis. Average rates for discharge of grains in bulk are about 7,500/8,000 tons per day of 24 consecutive hours; for general cargo a rate of 100 tons within normal working hours.

MEDICAL: All medical facilities are available; it would be appreciated for the Master to advise in advance if crew member is in need of urgent medical attention. Contact Barcelona Radio in an emergency.

FRESH WATER: All piers have water available by shore pipes or by barge. Rate of delivery about 16/20 t.p.h. Rate 150 t.p.h. by barge.

FUEL: Fuel oil and gas oil available at "Campsa", installation. It is advisable that Shipowners stem bunkers through their own contractors, with advance notice of 48 hours. Delivery either by barge, or at the bunkering pier of "Campsa". Bunker barges allowed alongside vessel during cargo-handling.

DEVELOPMENTS: Lengthening under construction of breakwater Dique del Este, and pier Contradique. A wharf for 6 berths for tankers only, plus 4 berths for vessels loading/unloading crudes in bulk with a depth of 39 ft. Dry dock planned for vessels up to 215 m. length and 40,000 tons.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: Normally carried out by crew, except in liner vessels which is contracted for by stevedores.

CERTIFICATES: Vessels should have all usual certificates aboard but only the Safety Wireless. Safety Equipment and Deratisation Certificates are required by authorities.

CUSTOMS ALLOWANCE: Quantity allowed for each crew member is 200 cigarettes and 1 bottle wine/spirits.

CARGO GEAR:

57	Quay cranes up to 3 tons
55	,, ,, ,, 6 tons
6	,, ,, ,, 10 tons
8	,, ,, ,, 15 tons
141	Mobile cranes 1–50 tons
3	Floating cranes up to 160 tons

IDENTIFICATION CARDS: Not required.

CONSULS:

Argentina	Tel: 317-58-82	India	Tel: 239-78-06
Austria	,, 236-35-44	Indonesia	,, 317-19-00
Belgium	,, 218-07-58	Italy	,, 215-16-54
Bolivia	,, 250-73-24	Japan	,, 310-20-97
Brazil	,, 301-49-00	Korea (Rep.)	,, 203-82-50
Cambodia	,, 247-42-67	Liberia	,, 213-81-50
Chile	,, 318-85-86	Libya	,, 228-11-04
Colombia	,, 254-02-48	Madagascar	,, 309-12-58
Costa Rica	,, 245-74-04	Monaco	,, 227-74-16
Cuba	,, 318-19-36	Morocco	,, 215-34-70
Denmark	,, 310-20-91	Netherlands	,, 217-33-58
Dominican Republic	,, 228-39-10	Nicaragua	,, 227-92-30
Ecuador	,, 217-34-84	Norway	,, 215-00-94
Eire	,, 250-04-48	Pakistan	,, 257-42-30
El Salvador	,, 245-02-64	Panama	,, 318-69-83
Ethiopia	,, 257-47-06	Paraguay	,, 239-32-02
Finland	,, 310-41-36	Peru	,, 230-12-42
France	,, 317-81-50	Portugal	,, 318-81-50
Gabon	,, 227-66-27	Senegal	,, 217-86-00
Germany, Fed. Rep.	,, 218-47-50	South Africa	,, 318-42-58
Great Britain	,, 239-08-04	Sweden	,, 318-93-66
Consul General, G.B.	,, 239-08-04	Switzerland	,, 250-05-00
Greece	,, 246-22-90	Thailand	,, 301-43-44
Guatemala	,, 230-77-91	Turkey	,, 215-20-09
Haiti	,, 213-81-50	Uruguay	,, 317-41-83
Honduras	,, 302-00-00	U.S.A	,, 319-95-50
Iceland	,, 250-03-93	Venezuela	,, 215-01-12

REPAIRS: All types deck and engine.

DRY DOCKS: 1 floating dock, length 111 m., lifting power 6,000 tons; belonging to Port Management.

SURVEYORS: Lloyd's; 2410400. A.B.S.; 2399275. N.V.; 3192906 and 2463164.

REPATRIATION: Good facilities available.

AIRPORT: Located about 7 km. from town, well served by regular airlines.

TIME: always GMT plus 1 hour.

HOLIDAYS: 1st January; 6th January, The Three Kings; 19th March, St. Joseph; Good Thursday, after 1400 hrs.; Good Friday; Resurrection Day; 1st May, Labour Day; Ascension Day; Whit Monday; Corpus Christi; 24th June, local holiday; 29th June, St. Peter and St. Paul; 18th July, National Holiday; 25th July, St. James; 15th August; 24th September, local holiday; 12th October; 1st November; 8th December; 25th December and 26th December, second Christmas Day.

POLICE/AMBULANCE/FIRE: Police 091; Harbour Police 3026367; Ambulance 3171717 (Also 24 hour medical service); Fire 080 and 2535353 (080 is best).

TELEPHONES: Only at Terminal Station.

SERVICES: Carpenters, lashing, hatch and tank cleaning all available.

AUTHORITY: Junta del Puerto de Barcelona.

BILBAO: 43.17 N. 02.55 W. (See Plan Book)

DOCUMENTS:

3 Cargo Manifests.
2 Negative Passengers.
3 Crew Lists.
2 Stores Lists.
2 Crew Personal Effects Lists.

The maximum quantity of tobacco and/or cigarettes allowed per crew member, Master included, is 3 kilos. Any surplus must be separated and manifested as cargo in transit and the manifest duly visaed by a Spanish Consular Representative at the loading port. Should there be no Spanish Consular Representative of a friendly nation, Port Authority (Custom House) or Chamber of Commerce in the sailing port. In case a vessel carrying an excess amount of tobacco or cigarettes and not in possession of a Manifest duly visaed by the competent Authority is diverted at sea to a Spanish port while on voyage to another, the Master should cable to the Administrator de Aduanas of Bilbao, notifying the diversion and the excess of tobacco manifested without offical visa. On arrival the Master should submit the Manifest and other documents to the Custom Authorities.

PILOTAGE: Pilotage is compulsory for vessels entering and leaving Bilbao Port. Pilot will board incoming deep laden or ballast tankers within a radius of 2 miles from the new Punta Lucero Light. The Pilot ladder for boarding is usually rigged off port side. If the Pilot is unable to board on account of bad weather, the Pilot boat will display the signal "follow in my wake" and lead the vessel into sheltered harbour.

Pilots keep on watch 24 hours on Channel 12.

ANCHORAGE: Good anchorage in Outer Harbour inside old breakwaters. Depths of LW about 28-33 ft. Also anchorage outside old breakwaters, between Santurce Breakwater and New Lucero Breakwater, lightening operations sometimes performed when weather good. The recommended anchorage zone for deep-laden vessels is 1.3 miles S.W. of Punta Galea Lighthouse in 12 fathoms, sand.

RESTRICTIONS: None, except when draft exceeds 13-14 ft. and proceeding to berths inside river, which case must await tide. See "Max. Size".

MAX. SIZE: No restrictions length or breadth. Max. advisable draft 30-31 ft. Tankers: Largest vessel entered 323,087 d.w.t. Length 347.94 m. Draft 23 m.

HEALTH: If proceeding direct to berth, pratique obtained immediately after berthing. Otherwise, at anchorage on arrival. Cases suspected disease or fever on board, Master must radio Agent, to advise Health Office. On berthing Health Authorities require Health Declaration, Derat Certificate and Crew List.

RADIO: Cabo Mayor Radio.

TUGS: No tugs required for entering port, only for berthing or shifting inside river. Ship's lines used, the tug employed according Pilot's advice. 28 tugs available, 125 h.p.-4,000 h.p.

BERTHING: Canal de Duesto 26 ft. alongside. Tankers: Vessels will berth day and night, but vessels deep laden must be on Pilot station 2 hours before HW. Mooring lines should be of polypropylene or fibre, etc.; if wires are used they should have a fibre pennant. For average weather conditions 18 mooring lines are recommended, 5 head ropes, 5 stern, 4 breasts and 4 springs.

Operated by the Port Authority:

General Cargo:

800 m. of berthing with depth of more than 12 m.
1,633 m. of berthing with depth between 8 m. and 10 m.
362 m. of berthing with depth between 6 m. and 8 m.
1,798 m. of berthing with depth betweem 4 m. and 6 m.

Bulk Cargo:

543 m. of berthing with depth of more than 12 m.
1,372 m. of berthing with depth between 6 m. and 8 m.
121 m. of berthing with depth between 4 m. and 6 m.

Containers:

250 m. of berthing with depth of more than 12 m.
500 m. of berthing with depth between 8 m. and 10 m.

Passenger:

180 m. of berthing with depth between 10 m. and 12 m.

There are also 2 Ro/Ro ramps available.

CRANES: Gantry Type: 4 with over 12 tons capacity, 9 of 12 tons capacity, 36 of 6 ton capacity, 62 of 3 tons capacity.

Mobile type: 20 mobile cranes with capacity from 3.5 tons to 100 tons.

Floating Cranes: 10 floating cranes with capacity up to 400 tons.

STEVEDORES: Very important send advance messages giving ETA. Agent then informs Shippers or Receivers' stevedores. Official working hours Monday/Saturday 0800–1200;1400–1800 hrs.

MEDICAL: Medical service must be arranged by the Agent. In emergency send cable in advance to Agent.

TANKERS: "Campsa" have private berths at Santurce and Zorrosa. Cargo manifest must be visaed by Spanish Consul, or in absence of Consul by Authority at loading port.

Petronor Refinery: *Location:* The Petronor Refinery is located on the North coast of Spain; the Marine Terminal is situated near the Township of Abanto v Ciervana. Geographical situation is approximately Latitude 43° 22.2′ N. Longitude 3° 05.8′ W.

A lighthouse is located on the extremity of the West breakwater (Dique de Poniente) marking the West side of the port entrance, showing a green light with 2 flashes every 6 seconds.

A temporary red buoy located in Latitude 43° 22′ 31″ N. Longitude 3° 04′ 41″ W., showing a red light with 2 flashes every 5 seconds marks the East side of the port entrance; this buoy marks the starting point of the East breakwater (Dique de Levante). Other lights may also be shown.

Charts: Spanish I. H. M. No. 941-942-1938-1940.
British Admiralty No. 74-2925.

Documents/Customs Allowances: The usual documents required are:

6 Crew Lists.

1 Negative Passenger List; if there are passengers aboard, 4 copies of the Passenger List.

2 Copies of the cargo manifest for Petronor and 2 copies of cargo in transit if any.

2 Copies of the vessel's Store List, including bunkers, vessel's stores, tobacco, spirits, medicine chest, etc.

2 Copies of the crew and/or passenger personal effects.

Crew members are not allowed to keep more than 200 cigarettes (or the equivalent in tobacco) and a bottle (1 litre) of spirits out of bond. The rest must be included in the vessel's store lists, and are to be sealed. The total maximum quantity that any ship can carry in accordance with the Spanish Laws is 3 kgs. of tobacco or 3,000 cigarettes for each person aboard (for instance, 30 crew members the maximum quantity allowed is 90 kgs. of tobacco or 90,000 cigarettes).

Any quantity over these amounts should be manifested as tobacco in transit and this Manifest visaed by the Spanish Consulate in the last previous port.

If a Spanish Consul, is not available in the last port of call, Master is required to send prior to arrival the following cable to:

DIRECCION GENERAL DE ADUANAS-MADRID

Vessel .... Coming from ....

Bound to Bilbao PETRONOR with tobacco Manifest not visaed last port due to Spanish Consul not being available in the last port.

Master ....

....

The text of this cable to be registered in the log book and 1 copy of the same to be given to the Customs Agent when boarding.

Clearance: The Customs Authority will board either when vessel is berthing or at anchor.

Pilotage: Pilotage is compulsory. Vessels must make contact with the Harbour Pilots Office 1 hour before arrival; Masters will make contact again when they are 7 miles from the port entrance.

For large VLCC's tankers, Pilots will board 3 miles off breakwater entrance.

There are no traffic separation schemes or traffic control systems for the Port of Bilbao and approaches.

Arrival Information: The pilot station maintains a permanent radio watch service on VHF Channel 12.

Vessels must send radio advice to Petronor Somorrostro, telephone 4377352 and ETA advice 72, 48 and 24 hours prior to arrival.

The 24 hour advance notice should be updated there after whenever 2 hours delay or more is likely.

If necessary the Refinery Terminal will contact vessels via Aranjuez/EAV, or via Coruna or Cabo Mayor Radio if possible.

Vessels can also make contact through 2182 kc/s with Bilbao Radio for a further phone contact direct.

The arrival cable shall include: Name of the vessel; ETA; Master's full name.

When vessels are coming to load the cable must also specify: the quantity and grade of cargo, loading order when it is more than one grade, tons of ballast and estimated deballasting time, bunkers required and the type. All communications with the Refinery Marine Terminal, do not relieve the Master of keeping the vessel's Agent duly informed.

Anchorage: Masters will be informed by harbour Pilots of the estimated berthing time and any other information in connection with berthing prospects; should need for anchoring arise due to terminal necessities or any others, vessels will be requested to anchor under the control of the harbour Pilots in the usual anchoring places, which must be confirmed by Pilots.

The following recommended anchorages for the different types of vessels are pointed out for information only.

Anchorage "A" (outside the harbour entrance):
Recommended area for vessels with a draft greater than 20 m. or over 150,000 d.w.t. (having a better manoeuvring area in case of an emergency).
Holding ground: Sand.
Depth: 50 m.
Bearings and Distances:
North of the entrance green lighthouse, distance 1.7 miles and 314° from Punta Galea lighthouse, distance 2.7 miles.

Anchorage "B" (inside the harbour entrance):
For vessels with draft less than 20 m. and between 90,000/150,000 d.w.t.
Holding ground: Sand.
Depth: 27 m.
Bearing and Distance:
261° from Punta Galea lighthouse; distance 1.9 miles.

Anchorage "C" (inside the harbour entrance):
For vessels less than 90,000 d.w.t.
Holding ground: Sand
Depth: 24 m.
Bearing and Distance:
229° from Punta Galea lighthouse; distance 1.2 miles.

Anchorage "D" (inside the harbour entrance):
For vessels when anchorage "C" is occupied.
Holding ground: Sand
Depth: 20 m.
Bearing and Distance:
204° from Punta Galea lighthouse; distance 1.2 miles.

Depths: The depth at the entrance and manoeuvring area to berths is 28 to 29 m., the maximum tidal range is 4.5 m. All depths refer to low water equinoctial springs.

Health: The national and international regulations concerning free Pratique are applied in Bilbao.

Free pratique is granted when at berth; in case of being anchored the Agent will be requested to arrange the visit under Master's requirements.

Radio advice to the Health Authorities is not required unless there is contagious sickness on board or if coming from an epidemic zone.

Garbage or trash must not be dumped into the port waters. The area surrounding the vessel shall be kept clean.

VHF: Petronor, Marine Terminal, is provided with a permanent radio watch service through VHF Channel 14 or 12.

Before berthing, Control will monitor VHF Channel 12; when the vessel is approaching the berth, it will change to work on Channel 14. Likewise, Petronor personnel appointed to the berth are constantly in communication with the Port Control through the radio. For internal communications between Berth/Port Control and the Refinery, there is, in addition to radio, a telephone system for restricted use.

Berthing: Speed Reference Lights: Placed inside the West breakwater from its initial point, near the port entrance are vertical blue lights that will help on determining the speed when vessel is proceeding towards berths.

From the initial point of the inside breakwater to Berth No. 1, lights are installed every 200 m. From Berth No. 1 to No. 2 every 100 m.

Berthing Assistance Information; Nereides System: Berths No. 1 and 2 are provided with a radar and sonar system which, by means of a luminous panel placed at berth and easily seen from the vessel, supplies the Master and Pilot with an instantaneous indication of the vessel's speed in cms./sec. of the hull side in connection with berthing at bow and stern; likewise, by means of the sonar, the distance in metres, from the hull to the contact points (fenders) bow/stern, appears on the same panel.

Berth No. 1	HW	LW
Spring tides	15 ft. 6 in.	0
Neap tides	9 ft. 6 in.	4 ft. 11 in.
Currents	None reported	
Depths	31 m.	

Loading arms (Hydraulic speed seal connection)

Crude	4×16 in.
Ballast	2×16 in.
Bunker	1×12 in.

Moorings
2 quick release hooks of 60 tons each.
3 quick release hooks of 100 tons each.
Mooring wires are permitted.

Berth No. 2	HW	LW
Spring tides	15 ft. 6 in.	0
Neap tides	9 ft. 6 in.	4 ft. 11 in.
Currents	None reported	
Depth	19.5 m.	

Loading arms (Hydraulic speed seal connection)

Crude/fuel/ballast	2×12 in.
Clean products/ballast	2×10 in.

Moorings
2 quick release hooks of 60 tons each.
3 quick release hooks of 100 tons each.
Mooring wires are permitted.

Berth Nos. 3-4-5-6
Tides and currents: Same for Berth Nos. 1-2. These berths are under construction. (1977)
Loading arms

Berth No. 3	Fuel/ballast	2×12 in.	Speed seal
	Clean products	1× 8 in.	Speed seal
	Clean products	1× 6 in.	Speed seal
Berth No. 4	Fuel/ballast	2×12 in.	Speed seal
	Ballast/clean prod.	2× 8 in.	Speed seal
Berth No. 5	Fuel/ballast	2×10 in.	No Speed seal
	Clean prod./ballast	1× 8 in.	No Speed seal
	Gasolines	1× 6 in.	Speed seal
Berth No. 6	Fuel/ballast	2×10 in.	No Speed seal
	Clean products	1× 8 in.	No Speed seal

Moorings: Mooring wires are permitted on the quick release hooks; if shore bitts are used the eyes of mooring line must be of manila, synthetic fibre or similar.

Mooring Lines: Vessels must be provided with suitable mooring lines in quality and quantity in accordance with their size. The quantity should not be less than 4 headlines, 4 breast and 4 springs at bow and stern respectively. The vessel's crew must keep the mooring lines taut and to the satisfaction of the Petronor supervisor at all times; the variations of the vessel due to changes of tide and/or vessel operations shall be taken into account constantly. The use of the tension winches will be carried out under Terminal Chief authorisation, in order to have the protection of the loading arms always guaranteed.

The use of mooring wires by the vessel will be allowed on the quick release hooks. If using wires to the bollards ashore, the tail pieces must be of Manila, synthetic fibre or similar with a breaking load at least equal of the wires.

Cargo information:

Heavy Hydrocarbons: Heavy hydrocarbons, such as Fuels, Diesel, Asphalts, etc., with an ignition point higher than 65°C (150°F) will be loaded in accordance with the rates established by the Refinery or limited to the conditions of the vessel lines.

Middle Distillates: Products such as Kerosenes, JP-5, Jet A-1, JP-4, Nafthas, Gasolines, Benzene, Toluene, etc.

The flow loading rate of these products to the vessel tanks will not exceed 1 m./sec. (3 ft./sec.) till the cargo level is 1 m. over the tank bottoms (covering lines, heating coils, etc.), in order to avoid turbulence and splashes.

This loading rate could be increased up to 5 m./sec. once the liquid reaches the mentioned level and it will be decreased to 1 m./sec. whenever the cargo level reaches 1 m. under the upper maximum level (vessel deck.)

The flow loading rate will be according to the following table:

Cargo line diameter	*Velocity flow rate 1 m./sec. bbls./cu.m.*	*Velocity Flow rate 5 m./sec. bbls./cu.m.*
4 in.	168 bbls./h. 27 cu.m.	840 bbls./h. 133 cu.m.
6 in.	380 bbls./h. 60.3 cu.m.	1,900 bbls./h. 301.4 cu.m.
8 in.	675 bbls./h. 107.1 cu.m.	3,375 bbls./h. 535.7 cu.m.
10 in.	1,080 bbls./h. 171.4 cu.m.	5,400 bbls./.h 857 cu.m.
12 in.	1,510 bbls./h. 239.6 cu.m.	7,550 bbls./h. 1,198 cu.m.
14 in.	1,850 bbls./h. 293.6 cu.m.	9,250 bbls./h. 1,467.2 cu.m.
16 in.	2,450 bbls./h. 388.9 cu.m.	12,250 bbls./h. 1,944.4 cu.m.

Medical: Medical services must be arranged through the Agent. In case of emergency this service can be requested through VHF in order to have everything prepared on arrival either at berth or at anchorage.

Petronor will advise the Health Authorities through VHF 16 or 14.

Fresh Water: No fresh water facilities on the berths. Fresh water must be arranged through the Agent in order to be supplied by barges.

Fuel: The fuel-oil/gas-oil requirements will be arranged directly between the vessel's Agent and Campsa. Fuel-oil is only available at Berth No. 1 with fuel-oil and gas-oil at all other berths.

Ballast: All ballast will be discharged into the shore facilities. The Master will report to the terminal when due to bad weather, the ballast quantity is above normal.

The sea suction and overboard discharge valves will be inspected, closed and sealed before starting any operation; representatives from the terminal and the vessel will take part in the inspection of the closing and sealing. The bilge valves of the engine with sea discharge will be also sealed.

Crew landing Permits: There is no restriction.

The Master will receive the Port Control Permits on arrival which will be duly completed before going ashore, each member will give one copy to the Petronor Representative at the berth gate.

Communications: The Marine Terminal is located at a distance of 8 kms. from the nearest rail station in Santurce; the departure frequency of trains is every 10 minutes.

The distance to/from Bilbao is 25 kms. by road.

Bilbao Airport is located in Sondica and it is 35 kms. from the terminal. It is linked daily with several flights to Madrid and Barcelona, and alternatively to Santiago de Compostela. There are also international links to London and Paris alternately.

Air reservation telephone: 429 10 90.

Rail reservation telephones: 421 35 00 and 424 59 42.

Visitors: Access to the terminal is only authorised to those persons who under previous justification should get on board.

The Marine terminal will issue the pass permit, pointing out the authorised area and time limit.

To go on board, under the previous authorisation of the Master, all persons should be provided with the respective permission of the Spanish Coast Guard.

DENSITY: 1025.

FRESH WATER: Always available. Delivery by tugs. Minimum 10 tons.

FUEL: Ordinary fuel oil and gas oil available at local "Campsa" refinery. Advisable that Shipowners stem bunkers 48 hours prior arrival. Delivery by barges, or at the bunkering pier. Bunkers available at Petronor. Advise Agent in advance.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Normally by crew, except in liner vessels, when contracted by stevedores.

CERTIFICATES: Have usual documents on board, but only Safety Radio, Safety Equipment and Deratisation Certificates required by authorities.

CUSTOMS ALLOWANCE: Normally, Customs permit 200 cigarettes, and 1 bottle wine/spirits per man.

CARGO GEAR: Usually shore cranes employed in loading or discharging but if require lightening then ship's derricks used as only 1 floating crane is available.

IDENTIFICATION CARDS: Not required.

CONSULS:

Argentina
Austria
Belgium
Bolivia
Brazil
Colombia
Costa Rica
Chile
Denmark
Dominican Republic
Ecuador
El Salvador
Finland
France
Greece
Guatemala
Haiti
Italy
Liberia
Nicaragua
Norway
Panama
Paraguay
Peru
Portugal
Sweden
Uruguay
U.S.A.
United Kingdom
Venezuela
W. Germany

REPAIRS: Good repair facilities, and several important shipyards.

DRY DOCKS: 5 graving docks. Biggest: length 166 m., breadth: 20 m. (naval shipyard).

REPATRIATION: Good facilities.

AIRPORT: About 10 km. from town. Regular services to Madrid and Barcelona. Also direct flights London and Paris.

TIME: GMT plus 1 hour (permanent).

HOLIDAYS: 1st January; 6th January; 19th March (St. Joseph); Good Thursday afternoon; Good Friday; 1st May (Labour Day); Ascension Day; Corpus Christi; 29th June (St. Peter and St. Paul); 18th July (National Holiday); 31st July (local holiday); 15th August; 12th October; 1st November; 25th December.

POLICE/AMBULANCE/FIRE: Police 091; Ambulance (hospital) 41.87.00; Fire 21.30.00.

AUTHORITY: El Comandante Militar de Marina de Bilbao.

BURELA: 43.39 N. 07.20 W.

BERTHING: Sheltered berth for vessels with draft up to 20 ft. Facilities includes 2 silos for bulk cement.

CADIZ: 36.30 N. 06.20 W. (See Plan Book)

DOCUMENTS:

Entrance Declaration.
Health Declaration.
List of Crew on Arrival.
List of Crew on Departure.
List of Passengers on Arrival (if applicable).
List of Passengers on Departure (if applicable).

All vessels must be represented by a local Agent who will be responsible for completing the required Customs, Health and Port Authorities documentation.

PILOTAGE: International Code Signals used to call Pilot. Pilot can be contacted by VHF or through telegraphic address. "Praticos Cadiz". 6 to 8 hours notice of ETA preferred.

Pilots operate a steam launch and a diesel launch both painted black with yellow funnel on which letter "P" is painted in white on both sides. Pilot boat does not remain at station but comes out when ordered. Pilot boards in an area between the Rota light and San Sebastian light. In case of bad weather the Pilot will board nearer Los Cochinos shore and meanwhile signal instructions to the vessel until the Pilot is able to board.

ANCHORAGE: Vessels waiting for a Pilot may anchor in any safe position according to draft and weather conditions. Tankers or deep draft vessels may anchor West of the Diamante buoy in 16-18 m. depth where the Pilot boards at first opportunity.

RESTRICTIONS: Entry is restricted only by the depth of the entrance channel, maximum safe draft 30 ft.

HEALTH: Master should radio, not more than 50 hours and not less than 5 hours before arrival, the following information to the port authority: name and nationality of ship, date and time of arrival, last port of call, number of passengers and crew aboard, if doctor on board and details of any sickness noted on voyage. Message to be addressed to "Sanidad Maritima Cadiz". International code quarantine signals to be shown on arrival when free pratique will be given provided health situation is satisfactory.

TUGS: Normally join vessel off the berths. 7 tugs available, up to 1,500 h.p.

BERTHING:

Mole No. 1. 220 m. length, depth alongside 10 m. L.W.
Mole No. 2. 460 m. length, depth alongside 10 m. L.W.
Mole No. 3. 440 m. length, depth alongside 10 m. L.W.
Generalisimo Franco Mole: 365 m. length, depth alongside 10 m.
Muelle Armamento: 200 m. length, depth alongside 9.50 m.
Muelle Embacadura: 110 m. length, depth alongside 9.50 m.

TANKERS: 3 Tanker berths for vessels up to 27 ft. draft at the piers in the Zona Franca, operated by Campsa. Hoses: Fuel oil 10 in., gas oil 8 in., gasoline 8 in. No slop discharge facilities.

International Terminals Corp. Berth, length 170 m., depth 9.5 m.

FUEL: Fuel, gas oil and several types of marine diesel can be supplied.

REPAIRS: There are 3 shipyards – Astilleros Espanoles SA, at Cadiz and Matagorda. Empresa Nacional Bazan-Carraca, and several workshops of Auxiliar de la Construccion Naval. All types of repairs can be effected.

DRY DOCKS: Largest is 245 m. long, 57 m. wide. In addition Astilleros Espanoles have 2 floating docks, 1 of 231 m. length, 24 m. breadth, lifting capacity 39,400 tons, and the other 100 m. length, 17.54 m. breadth lifting capacity 4,500 tons.

At Matagorda, there is a dry dock of 150.97 m. length, 19 m. width, and 6.23 m. max. draft.

OPENING/CLOSING HATCHES: This work is normally effected by the stevedores.

CONSULS: Argentina, Belgium, Bolivia, Colombia, Denmark, France, Germany, Greece, Italy, Liberia, Netherlands, Norway, Sweden, Finland, Portugal and Venezuela.

CUSTOMS ALLOWANCE: Max. of 3 kilos of tobacco for each person on board. All to be declared. Wine or spirits, 1 decilitre per man per day.

AIRPORT: Nearest at Seville, about 150 kms. away. Daily flights to Madrid, Barcelona and overseas.

TIME: GMT plus 1 hour all the year round.

TELEPHONES: Connection to vessels can be arranged by Agents.

SHORE LEAVE: Crew are permitted to go ashore subject to police control.

DEVELOPMENTS: Astilleros Espanoles is building a new dry dock to accommodate vessels up to 400,000 tons.

AUTHORITY: Comandante Militar de Marina.

CARTAGENA: 37.35 N. 00.59 W. (See Plan Book)

DOCUMENTS:

6 copies of the Crew List.
6 copies of the Passenger List, or 2 negative copies as the case may be.
2 sets copies Manifests covering cargo destined to Cartagena and carried in transit.
Store Provision List, in duplicate, including items such as: tobacco, spirits, radios, coffee, tea, bunkers, and any other items belonging to the vessel.
2 copies of all Personal Effects Lists, from passengers and ship's crew.

The amount of cigarettes allowed for each member of crew/passenger is 3 kilos; any amount over has to be manifested as tobacco in transit, and this manifest must be visaed by a Spanish Consul in the last loading/discharging port. If there is no Spanish Consul in the port of call before Cartagena, the Master is requested to send a cable to: Direccion General de Aduanas, Madrid, quoting as follows: "m.v.' . . . .' coming from . . . order to proceed to Cartagena tobacco manifest unlegalised = Master".

This cable is to be inserted in the radio log-book, and copy of same to be delivered to local Customs Authorities when boarding the vessel.

PILOTAGE: Compulsory. Position of Pilot station 37° 34.6′ N. 0° 59′ W. Position with green light of Dique de Curra bearing 000°, and the white light of Las Losas bearing 090°. This is the position at which the Pilot normally boards.

Vessels bound for Escombreras wait for Pilot in position 37° 34.2′ N., 0° 59′ W., with green light of Dique de Curra bearing 000° and the green light of Dique Bastarreche bearing 090°.

Pilot launch is a motor-boat with cabin, about 9 m. long, white hull, red below water line, black letter "P" painted on both sides.

When bad weather prohibits Pilot boarding in the above position, vessel may be required to embark Pilot inside the harbour breakwaters.

Vessels call Pilot in daytime by code flag "G", or by sounding 3 prolonged blasts on the whistle.

At night, Pilot may be called by flashing code signal "PT", or by 3 prolonged blasts on whistle.

Radio messages, with ETA, may be sent direct to Practicos Cartagena with 24 hours' notice, and confirmed 12 hours before arrival, messages should include vessel's seawater draft and, if calling for the first time, vessel's length overall. Pilot station equipped with VHF.

APPROACHES: Escombreras Bank with datum depth of 9.5 m. situated West of Escombreras Island, extends from 200 to 400 m. West of the Eastern tip of the island. This bank is unmarked.

Area of underwater obstructions exists between the coast, the meridian of Santa Ana buoy, and the parallel of Las Losas beacon.

There is a zone used for submarine exercises which is marked on the charts. Occasionally, naval divers carry out exercises in the vicinity of the port entrance. These are accompanied by naval vessels showing appropriate signals.

Ships bound for Escombreras, to enter the port, should steer for a point situated at the intersection of the N.S. line of the red light at the extremity of Curra Pier, and the E.W. line through the green light at the extremity of the Bastarreche Pier, at which point, approximately, the Pilot boards the vessel.

The least recorded depth in the entrance to the port is 25 m. The approaches to the port of Escombreras do not present any difficulties.

ANCHORAGE: Vessels anchored within the port limits should not carry out repairs affecting main engines as the possibility of sudden storms in Winter may make it necessary to move to a sheltered anchorage North of Cabo Tinoso, or to put to sea.

Vessels under 29 ft. 6 in. draft may anchor inside the breakwater provided they do not obstruct other vessels' movements.

Anchorage for larger vessels in Cartagena Roads, approx. position 37° 35′ N., 0° 59′ 30″ W. in depths of 40 m.

Anchorage for tankers off Escombreras in approx. position 37° 34′ N., 0° 58′ 23″ W., in depths of 42 m.

MAX. SIZE: No length limitations. For Cartagena max. draft 31 ft. 6 in. For Escombreras max. draft 68 ft.

HEALTH: Free pratique is immediately obtained when vessels berth any time from sunrise to sunset. Port Health Officers, require Maritime Health Declaration, Deratisation Certificate, and copy of crew and passenger lists.

RADIO: Cabo Palos Radio, Aranjuez Radio, and/or Gibraltar Radio.

TUGS: 3 tug-boats 500–1,000 h.p. with fire-fighting capabilities. All 3 tugs on duty 24 hours duly equipped, with 2 shifts of crew.

Tugs join vessels in vicinity of port entrance, vessel's lines normally used.

The tugs available to assist berthing tankers in Escombreras are all diesel tugs, equipped with fire-fighting equipment. 5 tugs available of up to 2,400 h.p.

BERTHING: Total length of general cargo quays 679 m. Depth alongside 8–10 m. Solid bulk materials: total length of berthing 717 m. Depth alongside 8–10 m.

CRANES:

No.	*Capacity*	*Type*
7	3–20 tons	Electric Gantry
2	3 tons	Mobile-Diesel
1	6 tons	Mobile-Diesel
2	25 tons	Mobile-Diesel
1	90 tons	Mobile-Diesel

STEVEDORES: In the case of a vessel calling at Cartagena at night time, Sundays or holidays, it is important that Master cable 24 hours in advance to advise his ETA in order that Agents are able to arrange stevedores' operations. Gangs can be called on as follows: on weekly working days 0800 and 1330 hrs. On Sundays/holidays 0800 hrs. (with prior advice to Union by 1200 hrs. on Saturdays or day preceding holidays). The official working hours are: Monday/Saturday 0800 to 1200 and 1330 to 1730 hrs. – Sundays/holidays: from 0800 to 1400 hrs.

MEDICAL: Medical services rendered as soon as requested but, in case of emergency, Master required to send urgent cable in advance.

TANKERS: Tankers call at port of Escombreras 2 miles away from Cartagena port, this port owned by Refineria de Petroleos de Escombreras S.A. Slop discharge facilities available at Escombreras.

For ships of 250,000 d.w.t Berth Number 7, of recent construction, consists of 4 dolphins, in a line parallel to Bastarreche Pier. Between the first and third dolphin is situated a loading platform with loading/discharging lines. The centre of this platform is situated at a distance of 230 m. from the head of Bastarreche Pier, bearing 140°.

The least depth in Berth No. 7 is 21.45 m. or 70 ft. 4 in. at the extreme South of the berth. The rest of the area has a depth of between 24 to 28 m.

The maximum length foreseen for tankers of 250,000 tons d.w.t. is 250 m. or, 1,145 ft., since the total length of the berth is 430 m.

The maximum allowable draft is 21 m. or 68 ft. 1 in.

Shore lines for crude oil are 1 of 40 in. diameter and 3,500 m. length, and another of 24 in. diameter and 3,500 m. length.

The Woodfield hose-handling gantry has 4×16 in. hoses of which the 2 outside hoses should be used for loading bunkers as well as for discharging. Connecting flanges of 16 in. diameter, type 150 ASA.

Fresh water can be supplied by pipe-line at all berths at a rate of 45 t.p.h.

Only vessels up to about 100,000 d.w.t. may be berthed at night.

8 berths suitable for tankers from 29 ft. 6 in. to 43 ft. draft.

2 berths for LPG carriers up to 29 ft. 6 in. draft.

FUEL: At Cartagena, only gas oil available from tank trucks. At Escombreras all grades of fuel available subject to advance notice given.

FRESH WATER: Available from quay by hose connections, only on working days. On Sundays/holidays notification to be required before 1400 hrs. preceding day.

FIRE PRECAUTIONS: The port area has its own Fire Department under supervision of Port Director. Although there is no waterborne equipment available, tug "Brio" will assist as required as well as Cartagena City Fire Department.

DEVELOPMENTS: There is a big programme to increase berthing-places by building new piers close to breakwaters, available for 3 vessels.

CONSULS: The following countries are represented in Cartagena:

Finland
France
Sweden
Panama
Peru
Italy
Denmark
Greece
Norway
Holland
Belgium

GANGWAY/DECK WATCHMEN: Not compulsory, only used when required by Master under Immigration Police Supervision.

OPENING/CLOSING HATCHES: Usually by ship's crew.

CUSTOMS ALLOWANCE: 200 cigarettes per each crew member, out of bond. The excess to be declared as cargo in transit. Wine and/or spirit: 1 bottle for each crew member or passenger.

CREW IDENTIFICATION CARDS: Not required.

REPAIRS: There are very good repair facilities. A private shipyard "Empresa Nacional Bazan" and 2 other private repair shops.

DRY DOCKS: 1 dry dock can accept vessels of 566 ft. length and 73 ft. beam. 2 floating docks for vessels up to 333 ft. in length.

REPATRIATION: All facilities available.

AIRPORT: San Janvier Airport situated 27 miles from Cartagena with daily service to Madrid, Barcelona and Almeria.

TIME: GMT plus 1 hour.

HOLIDAYS: 1st January; 6th January; 19th March (St. Joseph); Good Thursday from 1400 hrs.; Good Friday; 1st May (Labour Day); Ascension Day; Corpus Christi; 29th June (St. Peter and St. Paul); 18th July (National holiday); 15th August; 12th October; 1st November (All Saints' Day); 25th December.

POLICE/AMBULANCE/FIRE: Police tel. 501456. Ambulance 503470; Red Cross 510727; Fire Department 501111; Port Fire Department 503100.

AUTHORITY: Capitan de Navio, Comandante Militas de Marina de Cartagena, Comandancia de Marina.

CASTELLON DE LA PLANA: 39.58 N. 00.01 W.

(See Plan Book)

DOCUMENTS:

Manifest of Castellon cargo: 1 set covering all loading ports; make sure that this manifest is in perfectly good order before ship's berthing, as the Customs will board the vessel immediately and take it away as it is; thereafter any omission or excess of pages may lead to a fine.

Manifest of the Transit cargo: 2 sets (the same recommendations as above).

3 Crew Lists.

2 Negative of Passengers.

2 sets of Bills of Lading of Castellon cargo.

2 Provisions Lists.

2 Manifests of personal effects.

PILOTAGE: Compulsory, and service is permanent. Pilots board vessels by a cutter in roads near entrance formed by the 2 breakwaters.

Pilot cutters are painted white and have the letter "P" in black on each bow. Cutters have a blue flag, with letter "P" in white. Signals to be made by vessels requiring Pilot: 3 long blasts. Telegraphic address: "Practicos, Comandancia Marina, Castellon".

ANCHORAGE: Vessels can remain at anchor at the roads. Recommended anchorage: 0.5 mile East of lighthouse in depth of 12 m.

RESTRICTIONS: Max. draft 22 ft. for vessels of about 110–120 m. length. For vessels of more 120 m., to 140 m. length, max. draft is 20-21 ft.

HEALTH: Pratique obtained immediately after berthing, when Health Officer boards vessel. In case of suspected disease or fever on board Master must radio Agent to advise the Health Office. Following documents are required by the Health Officer upon berthing: Maritime Declaration of Health, Deratisation Certificate, 1 Crew List.

RADIO: Aranjuez Radio, call sign EAD, 36–48 hours prior arrival nearest radio station is El Grao Radio, call sign EAV.

TUGS: Tugs join vessels at entrance of port. Vessels of more than 100 m. length normally use 1 or 2 tugs. Ship's ropes used.

STEVEDORES: Very important that Master sends in advance short radio notice regarding vessel's ETA so Agent can inform Shippers or Receivers' stevedores accordingly. Official working hours of port are: Monday/Saturday 0830–1230 and 1400–1800 hrs.

MEDICAL: All kinds of medical services can be arranged. In case a crew member needs medical attendance urgently, it is advisable that Master sends a radio message in advance.

TANKERS: "Campsa" berth in Muelle Serrano Lloberes.

Esso Petroleos Espanoles, S.A. Refinery Terminal. Breasting Island; Lat. 39° 56′ 7″ N. Long. 00° 01′ 6″ E. for tankers with unlimited length. Depth of water in the berth is about 12.5 m. (41 ft.).

Vessels berth heading either East or West The Breasting Island is built on piles. A central platform about 70 m. (230 ft.) long and 15 m. (49 ft.) wide will accommodate the loading arms and the island services. 2 mooring dolphins are located at about 128 m. (420 ft.) from the centre of the platform. They are linked with the main platform by a walkway. The platform elevation from the sea level is an average of 6.8 m. (22 ft.).

Both sides of the Breasting Island central platform and the Eastern dolphin are provided with a resilient fendering system. No fendering system is installed on the Western dolphin. Vessels can be docked at both sides of the Breasting Island.

2 "swamped" breasting wires are anchored about 200 m. (640 ft.) off both sides of the Breasting Island. Quick-release hooks are provided on the platform corners and on both mooring dolphins.

Hoses: 2 loading arms of 10 in.–150 lbs/ASA and 2×8in. loading arms 150 lbs/ASA.

Any vessel from 3,000 d.w.t. through 37,000 d.w.t. can be accepted at the Breasting Island having a deepest draft of 37 ft. 6 in.

Sea berth: For crude oil cargoes with submarine pipe-line: Lat. 39° 56′ 4″ N. Long. 00° 02′ 7″ E. Unlimited length.

Depth of water in the berth is about 25 m. (82 ft.). Vessels berth heading 075°/080° true using both anchors forward, with about 280 m. (900 ft.) of chain out on each anchor and 2 swamped mooring legs if it is necessary.

The stern is secured to 5 Iamgar buoys equipped with 2 release hooks on each. These buoys have flashing lights.

1 navigational range consisting of 2 lighted buoys, is used to proceed to the sea berth and drop the anchors.

Any vessel from 27,000 d.w.t. to 165,000 d.w.t. can be accepted in the sea berth.

Bunkering available. Water available by barge. Provisions available. Pilotage compulsory – Esso Pilots. Tugs: 2 tugs compulsory.

BALLAST: All ballast must be discharged to shore tanks, no exception will be made to this rule. A total of 17,000 cu. m. (110,000 bbls) can be received by the Refinery ballast tanks.

FRESH WATER: All piers have water available by shore pipes. The rate of delivery is about 8–9 t.p.h.

FUEL: Available with 5 days notice and subject to "Campsa" berthing availability.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CERTIFICATES: Vessels should have usual documents on board, but only the Safety Wireless, Safety Equipment and Deratisation Certificates are required by authorities.

CUSTOMS ALLOWANCE: Normally, Customs permit 200 cigarettes per man out of bond and 1 bottle of spirit per man.

CARGO GEAR: All commercial piers served by electric shore cranes able to lift 3, 6 and 8–9 tons.

IDENTIFICATION CARDS: Not required.

CONSULS Italian, postal address Plaza Huerto Sogueros, 2-3-2, tel. 212288; France, Plaza Borull, 9, 220180; Sweden, Maestro Ripolles, 28, 220053; Norway, Trinidad 85, 224511.

REPAIRS: Work shop for small repairs.

REPATRIATION: Good facilities exist.

AIRPORT: Valencia, 70 km. away.

TIME: Always GMT plus 1 hour.

HOLIDAYS: 1st January; 6th January; 19th March, St. Joseph; Good Thursday after 1400 hrs.; Good Friday; 1st May, Labour Day; Ascension Day; Corpus Christi; 14th June, local holiday; 29th June, St. Peter and St. Paul; 18th July, National holiday; 25th July, St. James; 15th August; 12th October; 1st November; 8th December; 25th December; and 2 or 3 local holidays more, variable.

POLICE/AMBULANCE/FIRE: Police: tel. 220516; Ambulance 213944; Fire 221222.

CASTRO-URDIALES: 43.24 N. 03.14 W.

DOCUMENTS:

3 Cargo Manifests. 1 visaed by the consular authority.
3 Cargo Manifests for other ports if the vessel has called at and loaded in other ports.
3 Ballast Manifests (if the vessel has arrived in ballast).
5 Passenger Lists (if passengers are carried).
5 Captain's Certificates to the effect of "No Passengers" if no passengers are carried.
5 Crew Lists.
5 Stores Lists.
5 Crew's Store Lists – cameras, radios, spirits, cigarettes, etc.
Health Certificate.
Certificate of Derating and fumigation against insects.
4 Bills of Lading.
International Freeboard Certificate.
International Safety Certificate.
International Radio Certificate.
Certificate of Stowage of cargo.

PILOTAGE: *To request pilotage:* 1. Advise the arrival of the vessel 24 hours in advance. 2. Hoist flag "G" of the International Flag Code. 3. Anchor within the pilotage limits of the port.

Port pilotage limits: Coastal zone comprised between the Onton meridian and that of the Punta del Rabanal at 1 mile from the coast. The Pilot goes out to a limit of 1 mile outside the port. There are no means of radio communication with the pilot boat or pilot station. ETA to be given 24 hours in advance. Sound signals to summon the Pilot – 3 long blasts. In the event of bad weather, the Pilot does not proceed to sea, and the vessel must enter the port and anchor in the bay.

Anchorage to await Pilot: In the mouth of the port at 1 mile distant. The pilot boat carries a blue flag with the white letter "P" upon it. The pilot boat is blue and is a small motor-launch.

ANCHORAGES: The best anchorage is 045°–800 m. from the green coloured beacon of the breakwater at the port entrance, in a depth of 12 m.

RESTRICTIONS: There are no entry restrictions. Vessels with a draft greater than 6 m. cannot enter the port.

MAX. SIZE: Length 105 m., draft 5 m., depth at the entrance 9.14 m.

HEALTH: The Health Official boards the vessel as soon as it is berthed alongside. In the event of suspected illness or fever, advise Agent by radio and anchor near the port until the Health Doctor authorises entry.

RADIO: The best radio station to pass the ETA telegram to consignees or Agents is Santander radio station call sign "EAS". Frequency 500 kHz.

TUGS: None available.

BERTHING: Irrespective of tide. The S.E. pier has a total length of 980 ft., of which 500 ft. forms the commercial wharf, mainly for coasters sundry cargoes. No cranes. Fresh water supply. Depth 17 ft. at low water.

Iron ore loading tips: Along open coast adjoining Castro-Urdiales are several cantilever piers connected with the Iron Ore Mines, partly sheltered in creeks or small coves. All vessels bound to load iron ore there should clear and apply at Port of Castro Urdiales. Steamers cannot remain at these berths during rough weather but may find good anchorage in roads, or immediate shelter at the port of Castro-Urdiales, or better at Bilbao Harbour 9 miles East.

The Iron Ore Loading berths (no length limit) are as follows:

Name	*Situation*	*Approx. ebbtide draft*	*Loading rate per working hour*
Dicido	1 mile E.	21 ft.	800 tons
Saltacaballo	1.5 miles E.	22 ft.	800 tons
Onton	2 miles E.	21 ft.	1,000 tons

STEVEDORES: Ordered by Agent or Shipper. No ETA to stevedores necessary.

MEDICAL: It is not necessary for Agent to receive advance notice that medical attention is required. In the port there is a corps of doctors and 1 of them is always on duty for any emergency. Futhermore, there is a permanent Spanish Red Cross service with ambulances to transport any patient to a large hospital centre. There is also a hospital in this town.

In the case of serious illness, patients are taken by ambulance to the Cruces Medical Aid Centre (province of Vizcaya-Bilbao) 18 km. from Castro Urdiales.

International Vaccination Certificates are required.

DENSITY: 1016.

FRESH WATER: Water may be taken on board at the San Luis Quay (also known as the Ocharan Mazas Quay). By means of hoses and at a rate of delivery of about 40 t.p.h.

FUEL: Not available.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: Carried out by Crew.

CERTIFICATES: Safety Wireless, Safety Equipment, and Deratisation generally inspected.

CUSTOMS ALLOWANCE: Normally 200 cigarettes per man. For longer stay, new allotment out of bond obtainable. Wine/and/or Spirit: 1 bottle per man.

CARGO GEAR: At the small commercial wharf ship's derricks are used. At the iron ore loading berths along the coast with Cantilever Piers, conveyor belt employed with spout at the tip.

IDENTIFICATION CARDS: Not required.

CONSULS: None.

REPAIRS: Limited.

REPATRIATION: Crew changes and repatriation can be effected, bearing in mind that any consular negotiation must be made in Bilbao, since there are no Consulates in this port.
AIRPORT: Nearest Sondica (Bilbao) 40 km. by road.
TIME: Always GMT plus 1 hour.
HOLIDAYS: Sundays; 1st January; 19th March (Saint Joseph); April, Holy Thursday and Friday (variable each year); 1st, 23rd May; 13th and 29th June; 18th and 25th July; 15th August; 12th October; 1st November; 25th December. On holidays, work may proceed if requested.
POLICE/AMBULANCE/FIRE: Police C.G. Tel. 861146; Ambulance Red Cross 861147 and 861191; Hospital 860196; Fire 861294.
TELEPHONES: No arrangements for placing telephones on board.
SHORE LEAVE: Crew allowed ashore.
DELAYS: The only delays that can normally be expected are those due to bad weather.
AUTHORITY: Military Marine Adjutant – Port Captain.

CEUTA: 32.54 N. 05.17 W.

DOCUMENTS:

Health Declaration.
2 Cargo Manifests.
2 Stores Lists.
4 Crew Lists.
5 Passenger Lists.

PILOTAGE: Radio Agent advising ETA 24 hours in advance. International code signals used to call Pilot, or give 3 long blasts. Sound signal used day and night. Pilot boards within 1 mile of the breakwater. Pilotage compulsory.
ANCHORAGE: N.W. of the harbour in depths from 10 to 12 fathoms, at about 2.25 cables off breakwater but vessels should leave this anchorage with strong winds from East or West. The bottom off the N.W. side of Muelle de Poniente is mostly rocky. The existence of submarine cables is marked by a hemispherical buoy painted in white, moored at about 3.25 cables bearing 74° from the red light at the head of Muelle de Levante. No light is exhibited. For this reason, anchorage is prohibited to the North of a line extending from the root of Muelle de Levante bearing 298° to position of the buoy already mentioned.
MAX. SIZE: Length, 220 m. Max. draft, 33 ft. 6 in.
HEALTH: Pratique obtained immediately after berthing when vessel boarded by health officials.
RADIO: Tangier, or Cadiz Radio.
TUGS: Usually 2 available of 1,200 h.p. Tugs use ship's lines.
BERTHING: West Mole: 5 berths for vessels up to 33 ft. 6 in. draft. East Mole: 2 berths for vessels up to 31 ft. draft. Dato wharf: 2 berths, up to 20 ft. draft.
STEVEDORES: Accurate advance notice of ETA necessary to order gangs required. Gangs are ordered at 0730, and 1630 hrs. For Sundays and holidays, gangs ordered before 1730 hrs. previous day. Average cargo handling rates: General cargo, 7 tons per gang/hour; bagged cargo, 10 tons per gang/hour; drums, 13 tons per gang/hour. Overtime from 2000 hrs., Sundays and holidays, 40% surcharge.
MEDICAL: Advance notice by radio preferred. Hospital facilities available.
DENSITY: About 3.64%.
FRESH WATER: Available, but may be some restriction in Summer months.
FUEL: All grades available, to be ordered in advance.
GANGWAY/DECK WATCHMEN: Available but not essential.
OPENING/CLOSING HATCHES: Performed by stevedores.
CUSTOMS ALLOWANCE: Maximum 3 kilos tobacco for each crew member. Normal daily consumption of wine and spirits allowed.
IDENTIFICATION CARDS: Not required.
CONSULS:

Great Britain,	Tel. 512522	Denmark,	Tel. 512254
France	,, 512521	Italy	,, 511053
Belgium	,, 512521	Netherlands	,, 511408
Sweden	,, 511801	Norway	,, 511700

REPAIRS: Only minor repairs can be effected. Slipways for vessels up to 500 tons.
REPATRIATION: All facilities available.

Seamen's Books, in lieu of passports, accepted by Spanish Immigration Authority for Seamen of the following nationalities only:

Belgium, Federal Republic of Germany, France, Greece, Holland, Italy, Ireland, Luxembourg and Portugal.

Seamen of other nationalities will require valid passports and it is advisable to check with Agent regarding visas required in some cases.
AIRPORT: Nearest international airports at Tangier, 100 km. away, and at Malaga, 137 km. away.
TIME: GMT plus 1 hour in Winter, GMT plus 2 hours in Summer.
HOLIDAYS: New Year's Day, 6th January, 19th March, Holy Thursday (afternoon), Good Friday, 1st May, Ascension Day, Corpus Christi, 29th June, 18th July, 25th July, 5th August, 15th August, 12th October, 1st November, 8th December, Christmas Day. All holidays may be worked by voluntary labour.
POLICE/FIRE/AMBULANCE: Police, tel. 513324; Fire, tel. 513333; Ambulance, tel. 514509.
TELEPHONES: No arrangements for placing telephones on board.
AUTHORITY: Harbour Master.
AGENT: Ybarrola, Depositos de Aceite Combustible, S.A. Avenida de Espana, 11. PO Box 46, Ceuta. Tel. 511800. Cables, Ybarrola Ceuta. Telex: 78026 and 78111.

CORUNNA: 43.23 N. 08.22 W. (See Plan Book)

DOCUMENTS:

3 Crew Lists.
2 Passenger Lists or a negative.
1 Cargo Manifest of goods destined for the port.
Another Manifest covering Transit Cargo.
2 Store Lists, including tobacco, cigars, cigarettes, coffee, spirits, radios, cameras, etc., in possession of crew. In all cases make and number of radios to be indicated.
Safety Wireless Certificate and Safety Equipment Certificate.
If vessel carries over 3 kilos tobacco per man, the excess to be declared in separate manifest, which must be visaed by Spanish Consul at the last port, otherwise vessel is exposed to heavy fine.

PILOTAGE: Compulsory. International code signals used to call Pilot.
RESTRICTIONS: No restrictions on night manoeuvres.
MAX. SIZE: Length and beam not restricted. Cargo vessels 36 ft. draft for berthing.

Tankers: Largest tanker to enter 111,423 d.w.t. Draft on arrival and departure; Forward 15.24 m. Aft. 15.54 m. Depth alongside 17.0 m.
HEALTH: If vessels proceed directly to berth, pratique can be obtained immediately after berthing. Otherwise, at anchorage at vessel's arrival.

If vessel has sickness on board of a contagious nature Master should advise Health Authorities by radio, and they will examine patients immediately upon arrival, to enable vessel to be granted free pratique.
TUGS: 4 Available up to 2,300 h.p.
BERTHING:

Berth	*Length (m)*	*Depth (m)*
Mendez Nunez	250	8.0
Oil Harbour	1,080	17.0
Bateria	150	8.0
,,	67	5.5
Calvo Sotelo Norte	20	7.0
,, ,, ,,	200	10.0
Calvo Sotelo Sur	200	10.0
,, ,, ,,	200	10.0
San Diego	650	11.0
Espigon Oeste	150	6.0
Espigon Este	50	5.0
,, ,,	150	3.0

CRANES: 24 electric cranes, capacity 3–45 tons, outreach 10–22 m. 2 diesel-electric mobile cranes, capacity 1.5–6.0 tons, outreach 8.0–2.5 m. 1 locomotive crane, capacity 5 tons.
BULK HANDLING FACILITIES: *Private Storage Facilities:*

Cement:	3 silos each of 800 tons capacity.
	4 silos each of 1,000 tons capacity.
Aluminium:	3 silos each of 3,000 tons capacity
	1 silo capacity 4,000 tons.
Fertilizer:	2 tanks each of 7,500 tons capacity.
Unspecified Oils:	2 silos each of 1,000 tons capacity.
	2 silos each of 500 tons capacity
	1 silo capacity 600 tons.
	1 silo capacity 350 tons.
	6 silos each of 500 tons capacity.

TANKERS: 2 berths, depth 13.0 m. for tankers of 45,000 d.w.t. and 60,000 d.w.t.

1 pier, depth 17.0 m. Berthing for 1 tanker of 120,000 d.w.t. and the other 65,000 d.w.t.

Storage facilities:

Campsa: 6 tanks of 3,500 cu.m. each and 3 tanks of 2,500 cu.m. each.

Petroliber; 18 tanks with capacities from 2,500 cu.m. to 35.000 cu.m. Total capacity 220,000 cu.m.

Facilities for reception of dirty ballast.
FRESH WATER: Can be supplied by pipe-line at most berths rate 30-150 t.p.h. or by barge at rate of 150 t.p.h.
FUEL: Can be supplied by pipe-line at most berths. No barges.
CUSTOMS ALLOWANCE: Normally Customs permit 200 cigarettes per man out of bond. Additional quantities needed depend on the stay of ship in port. 1 bottle of spirits per man.
REPAIRS: Minor repairs can be effected in shore work shops.
AIRPORT: Nearest international airport at Santiago de Compostella 60 km. away.
TIME: Always GMT plus 1 hour.
HOLIDAYS: Work can be arranged on following holidays. New Year's Day (January 1st full day); Epiphany (January 6th full day); St. Joseph (March 19th full day); Easter Thursday (half day); Easter Friday (full day); St. Joseph Artizan (May 1st full day); Patron Saint of Spain (July 25th full day); Ascencion Day (August 15th full day); Holiday of Hispanisicm (October 12th full day); All Saints' (November 1st full day); Immaculate Conception (December 8th full day); Christmas Day (December 25th full day).
AUTHORITY: Junta del Puerto.

FERROL: 43.28 N. 08.16 W.

DOCUMENTS:

3 Crew Lists.
2 Passenger Lists or a negative.
1 Cargo Manifest of goods destined for the port.
Another Manifest covering transit cargo.
2 Store Lists, including tobacco, cigars, cigarettes, coffee, spirits, radios, cameras, etc., in possession of crew. In all cases make and number of radios to be indicated.
Safety Wireless Certificate and Safety Equipment Certificate.

If vessel carries over 3 kilos tobacco per man, the excess to be declared in a separate manifest, which must be visaed by Spanish Consul at the last port, otherwise vessel is exposed to heavy fine.

PILOTAGE: Compulsory. International code signals used to call Pilots. Pilots board off Cape Priorino.

MAX. SIZE: Cargo vessels up to 32 ft. draft. Tankers up to 35 ft. draft.

HEALTH: If vessel proceeds directly to berth, pratique can be obtained immediately after berthing. Otherwise, at anchorage at vessels arrival. If vessel has sickness on board of a contagious nature Masters should advise Health Authorities by radio, and they will examine patients immediately upon arrival, to enable vessel to be granted free pratique.

TUGS: Available up to 1,250 h.p. Also salvage tug normally stationed at Ferrol.

BERTHING: Depth alongside quays 25–32 ft.

TANKERS: Campsa Oil Terminal, 3 berths, can accommodate tankers up to 656 ft. length and 35 ft. draft. Facilities available for discharging slops ashore.

FRESH WATER: Can be supplied from the quays.

FUEL: All grades available at the oil berths.

REPAIRS: All ships' repairs can be effected.

DRY DOCKS: 5 dry docks for building and repairing Naval and merchant ships. Largest dry dock length 1,020 ft., width 155 ft. for vessels up to 80,000 d.w.t.

CUSTOMS ALLOWANCE: Normally Customs permit 200 cigarettes per man out of bond. Additional quantities needed depend on the stay of ship in port. One bottle of spirits per man.

AIRPORT: Alevedro Airport (La Coruna), two services a day to Madrid. Labacolla Airport (Compostela), regular services to Oviedo, Santander, Bilbao, San Sebastian, Barcelona, and Madrid.

TIME: Always GMT plus 1 hour.

HOLIDAYS: Work can be arranged on following holidays. New Year's Day (January 1st, full day); Epiphany (January 6th, full day); January 7th (full day); Saint Joseph (March 19th, full day); Easter (two days); St. Joseph Artisan (May 1st, full day); St. Peter & St. Paul (June 29th, full day); Labour Day (July 13th, full day); July 16th (full day); Patron Saint of Spain (July 25th, full day); Assumption Day (August 15th, full day); Martyrs' Day (August 30th, full day); Holiday of Hispanicism (October 12th, full day); All Saints (November 1st, full day); Christmas Day (December 25th, full day).

AUTHORITY: Junta del Puerto, Comandancia de Marina.

GARRUCHA: 37.10 N. 01.49 W.

SHIPMASTER'S REPORT: 1977

DOCUMENTS: Usual forms required:

4 Crew Lists
1 Crew Declaration
1 Ship's Stores Declaration
Ship's Register
Cigarettes and spirits sealed.

APPROACHES: Coming in from the East the port is easy to find, first sighting is of a small Spanish town at the edge of the sea. On the radar the harbour breakwater begins to show up 12 miles, and is clearly distinguished at 6 miles.

PILOTAGE: The Pilot boards from a small open boat about 2 cables from the end of the breakwater, the boat is painted white and for a short spell shows a blue flag with a white "P" on it to convince you that he is the Pilot and not a local fisherman. The Pilot is competent, though his English was poor. For departure no Pilot is provided as it is a straight run out of the harbour.

ANCHORAGE: On our arrival 1 vessel was anchored in a position off the centre of the town, 2 cables from the end of the breakwater on a line drawn continuing from the breakwater, this appears to be the anchorage mentioned in the Admiralty Pilot Book. We passed close inshore of him and obtained soundings of 14 to 16 m. when passing his position, whilst we were alongside another vessel arrived and anchored 1.5 cables to seaward from the breakwater.

HARBOUR: The harbour is man-made, the outer wall is made of high stone blocks in an "L" shape, the foot of the "L" attached to the land and the outer part running in line with the shore. It is entered from the South with a mole on the port hand enclosing a small fishing harbour. Minimum depth according to the Pilot is 6.3 m. In the N.W. corner on the outer breakwater there is a large concrete apron extending for a length of approximately 100 m. where we loaded, then from the seaward end to the end of breakwater there is an open berth with a large cantilevered loading chute jutting out over the harbour which is fed from conveyors on the seaward side of the breakwater.

BERTHING: The vessel entered the harbour from the South, when the bow was almost level with the end of the inner berth the starboard anchor was dropped to 1 shackle and the vessel swung to starboard on the anchor, a headline was sent away and when the vessel was three quarters swung the anchor picked up. The face of the quay was protected with large roller rubber tyre fenders.

LOADING: The main export of the port is gypsum stone in bulk, we loaded from quay with 2 conveyor belts being fed by dumper trucks into bins on the end of the conveyor belts from the cargo stacked on the quay. The loading rate with the 2 conveyors was up to 500 tonnes per hour, further supplies of cargo were brought down in lorries from a dump at the end of the harbour. The labour was helpful in positioning the conveyors to our requirements, and they have one man who keeps a careful eye on the draft.

SUPPLIES: There is no ship chandler in Garrucha, however, limited supplies can be acquired from the local small supermarkets and close to the market there is a butcher willing to supply what he can, vegetables can be bought in the market. Fresh water is supplied by road tanker and pumped aboard, the tanker holding approximately 4 tonnes.

GIJON: 43.34 N. 05.41 W. (See Plan Book)

LOCATION: The port is located on North coast of Spain on Gijon Bay. The harbour of Gijon has 3 main areas: Commercial area (formerly called Puerto del Musel) on N.W. of Bay; Local Harbour on S.E. of Bay (used by fishing vessels and yachts); Central area, where ship and dockyards are located.

DOCUMENTS: *Cargo Manifests:* A set of manifests (3 copies) has to be handed to the Customs Authorities. This manifest should cover all cargo on board including any transit cargo, that is, covering all cargo bound for any port. If the vessel arrives in ballast at a Spanish port, a "nil" cargo manifest has to be submitted to the Customs Authorities. A special visaed *Tobacco Manifest* is also necessary, in accordance with the following paragraph.

Transit Tobacco Manifest: Please pay special attention to this in order to avoid considerable losses and expenses. The Spanish Customs regulations provide for 3 kilos of tobacco per Crew member to be on board as usual provisions. If the total quantity of tobacco (including cigarettes, cigars, pipe tobacco, and other kinds of tobacco) does not exceed the said average of 3 kilos per Crew member, such quantity may be declared as "provisions" on the usual provisions list, and no further documentation is necessary. For your guidance the Customs consider a carton of 200 American cigarettes to weigh 250 grams. If the total quantity on board exceeds the said average, the excessive quantity must be shown on a special transit manifest. Usual manifest forms may be employed, describing the tobacco in Spanish, as "Tobacco en Transito". The essential point is that this transit manifest is visaed by the Spanish Consulate which must insert a full and complete visa. A simple consular stamp is not sufficient. This point is mentioned especially because it is known from experience that the information given by Spanish Consulates in this respect is often different and erroneous. If there is no Spanish Consulate at the last port of sailing, or nearby the tobacco manifest may be visaed by the local Customs Authorities, or a friendly consulate, but the visa is still essential. The Spanish Customs Authorities are very strict in this respect and the lack of a visa on the tobacco manifest would inevitably entail the confiscation of the excessive quantity, plus severe fines from the Customs.

Provisions and Stores List: Has to be submitted in duplicate to the Customs Authorities. Usual international forms may be employed.

Crew List: Must also be submitted to the Marine Authorities.

Personal Effects Declaration: Has to be submitted in duplicate to the Customs Authorities and must be signed by all the Crew members.

Passenger List: Including passengers in transit, must be presented. When no passengers are on board a "nil" passenger paragraph has to be issued in the cargo or ballast manifest, as follows: "No Pasajeros".

The above mentioned documents must be signed by the Master and should bear the ship's stamp.

PILOTAGE: On approaching the Port of Gijon, Masters are urged to contact the pilot station via VHF Channel 14. The Pilot will board the vessel in the roads, whether scheduled to berth or to remain at anchorage. The Pilot will be instructed beforehand in respect of ship's berthing/anchorage instructions. Pilotage is compulsory.

ANCHORAGE: The Port of Gijon is located in the Bay of Gijon. It is a wide open area with deep water. Large vessels remain at anchor (when berth is not available) outside of the inner port limits. Smaller ships may anchor within breakwaters.

RESTRICTIONS: The mouth of the harbour is 400 m. wide, and depth over 21 m. Tidal range: 4.6 m.

Pier	*Length (m.)*	*Depth alongside (Lowest Spring tide)*
Muelle Norte:		
1st Section	660	14 m. (45 ft. 11 in.)
2nd Section	93	12 m. (39 ft. 7 in.) to 14 m. (45 ft. 11 in.)
3rd Section	348	7.5 m. (24 ft. 7 in.) to 9.5 m. (31 ft. 2 in.)
Muelle de Ribera		
1 Alineacion	288	6.5 m. (21 ft. 4 in.) to 7.5 m. (24 ft. 7 in.)
2 Alineacion	109	7.5 m. (24 ft. 7 in.) to 9 m. (29 ft. 6 in.)
3 Alineacion	156	7.5 m. (24 ft. 7 in.) to 9 m. (29 ft. 6 in.)
Espigon I		
North	220	8 m. (26 ft. 3 in.) to 10 m. (32 ft. 9 in.)
South	314	9.5 m. (31 ft. 2 in.) to 10 m. (32 ft. 9 in.)
Estacion Maritima	114	6.5 m. (21 ft. 4 in.)
Parque de Carbones	225	8.5 m. (27 ft. 11 in.)
Espigon II		
North	300	8 m. (26 ft. 3 in.) to 12 m. (39 ft. 7 in.)
Head	80	12.2 m. (40 ft.)
South 1	180	9 m. (29 ft. 6 in.) to 12 m. (39 ft. 7 in.)
South 2	166	8 m. (26 ft. 3 in.)
Pantalan de Petroleros	360	9 m. (29 ft. 6 in.)
Muelle I. Moliner	313	14.5 m. (47 ft. 7 in.)

HEALTH: It is strongly recommended that Masters send a radio message requesting Free Pratique 24 hours before the vessel's arrival in port, to "Sanidad Exterior" Gijon, also notify Agent.

VHF: *Communications with ships at anchor:* Communication may be established by VHF Channels 16 and 26 via Radio Gijon coastal station. Pilot station may be contacted through Channel 14.

TUGS: "Jove" (500 h.p.), "Torres" (1,000 h.p.), "Penas" (2,500 h.p.). When required, service is complemented with the tugs based at the nearby port of Aviles.

Entrance Regulations: The undersecretariat of the Merchant Marine's General Direction of Navigation has approved the regulations proposed by the Port of Gijon Authority concerning entrance of large vessels in the Port of Gijon (El Musel inner wharves). These regulations will be applicable to all vessels in good manoeuvring conditions. Length is to be understood as overall for bulbous bow ships, and between perpendiculars for all others. Unless otherwise specified, tugs horsepower is to be understood as being not less than 500 h.p.

Group 1:
Length from 215 to 250 m. Max. draft: 45 ft.
Water beneath keel: 5 ft. Tugs: 3 (1 of 2,000 h.p.)

Group 2:
Length from 250 to 260 m. Max. draft: 45 ft.
Water beneath keel: 6 ft. Tugs: same as group 1.

Group 3:
Length from 260 to 275 m. Max. draft: 45 ft.
Water beneath keel: 7 ft. Tugs: 4 (1 of 2,000 h.p.).

Group 4:
Length from 275 to 290 m. Max. draft: 43 ft.
Water beneath keel: 8 ft. Tugs: Same as group 3.

Group 5:
Length from 290 to 305 m. Max. draft: 41 ft.
Water beneath keel: 9 ft. Tugs: 5 (1 of 2,000 h.p.).

Manoeuvring of Groups 2 and 3 will be done during good weather and of Groups 4 and 5 during good weather and preferably in day time. For ships over 305 m. length, entering must be approved by competent authorities, conditions to be determined.

BERTHING: Pier's name, depth alongside, usage and facilities:

Muelle Norte (North Pier)
Total length: 1,101 m.
First Section A:
110 m. length. 14 m. depth. Liquefied Gas discharge.
Connection to gaseoduct.
First Section B:
550 m. length. 14 m. depth. Bulk discharge.
4 portico-type cranes, each discharging 500 t.p.h.
Conveyor belt. 3 cranes of 6 tons each: rate 60 t.p.h. each.
Second Section:
93 m. length. 9.5 depth. Bulk and general Cargo.
2 cranes of 12 tons each handling 90 t.p.h. each.
Third Section:
348 m. length. 6.5/9.5 m. depth. Coal loading berth.
3 railwagon elevators, 20 tons each handling 100 t.p.h.

Muelles de Rivera:
Total length 553 m.
Primera Alineacion
228 m. length. 6.4/7.0 m. depth. General cargo.
2 cranes of 3 tons each handling 25 t.p.h.
2 cranes of 3 tons each handling 28 t.p.h.
4 cranes of 3 tons each handling 30 t.p.h.
Segunda Alineacion
109 m. length. 7.5 m. depth. Bulk cement loading.
Bulk cement loading installation.
1 crane of 3 tons handling 25 t.p.h.
Tercera Alineacion
156 m. length. 7.3/8.5 m. depth. General Cargo.
1 crane of 45 tons handling 140 t.p.h.
2 cranes of 3 tons each handling 25 t.p.h.
1 crane of 3 tons handling 30 t.p.h.

I Espigon (Pier 1):
Total length 534 m.
Alineacion Norte (North Section)
220 m. length. 7.3/10.5 m. depth. Bulk and General cargo.
6 cranes of 3 tons each handling 30 t.p.h.
Alineacion Sur (South Section)
314 m. length. 7/12 m. depth. Heavy cargo and steel goods.
1 crane of 12 tons handling 90 t.p.h.
2 cranes of 25 tons each handling 140 t.p.h.
1 crane of 45 tons handling 140 t.p.h.

Estacion Maritima:
114 m. length. 5.5/7.0 m. depth. General cargo and steel goods.
3 cranes of 3 tons each handling 28 t.p.h.

Parque de Carbones (Coal Berth):
225 m. length. 6.5/8.0 m. depth. Coal loading berth.
A coal loading installation handling 400 t.p.h. each one of the 2 bridges and 1 crane of 45 tons handling rail wagons.

II Espigon (Pier 2):
Total length 646 m.
Alineacion Norte I (North Section 1)
80 m. length. 6.6/8.5 m. depth. Cement loading.
A cement loading installation: 200 t.p.h.
Alineacion Norte II (North Section 2)
220 m. length. 8.5/12.5 m. depth. Oil and Bulk cargo.
6 cranes of 6 tons handling 60 t.p.h. each.
3 connections for oil products.
Alineacion Sur I (South Section 1)
166 m. length. 8.5 m. depth. Oil products.
Connections for oil products.
Tanks for vegetable oil.
Alineacion Sur II (South Section 2)
180 m. length. 8.5/12.2 m. depth. General cargo, oil and steel products.
Connections for oil products.
3 cranes of 6 tons each handling 60 t.p.h.
1 crane of 12 tons handling 100 t.p.h.

Pantalan de Petroleros (Oil Berth):
Total length 360 m.
North Section
180 m. length. 9 m. depth. Oil products.
Connection for discharging oil products.
South Section
180 m. length. 9 m. depth. Oil products.
Connection for discharging oil products.

Muelles de la Osa:
880 m. of length in 3 sections. 8/12 m. depth. Steel cargo.
6 cranes of 6 tons handling 60 t.p.h. each.

Muelles I Moliner:
313 m. length. 14.5/15 m. depth. Bulk and general cargo.
4 cranes of 12 tons handling 90 t.p.h. each.

TANKERS: 1 tanker berth owned by Campsa accommodating tankers of 600 ft. length and maximum draft 29 ft. 6 in. Also see "Berthing".

STEVEDORES: Work in the port is not performed on Sundays or Holidays.

Working Hours.—Monday/Friday 0800-1200, 1300-1700. Overtime from 1700-2100.

Discharge of coal and ore at Dique Norte is carried out 0000-2400 hrs. continually from Monday 0600 to Saturday 1800 hrs.
Saturday: 0800-1200 hrs.
Sunday/Holiday: No work.

MEDICAL: Crew members requiring medical attention, hospitalisation, etc. should be reported by the Master to the Ships Agent for prompt attention. All necessary facilities are available at Gijon.

FRESH WATER: Available ex-wharf or barge. From the wharf connections it is supplied at 20 t.p.h., and from barge at those berths where there is no shore supply facility.

FUEL: Fuel and diesel oil are supplied to ships either directly from shore connection (available only at Espigon II) or by a small tanker in service for the purpose.

CONSULS: The following countries have consular representation in Gijon: Argentina, Belgium, Brazil, Chile, Dominican Republic, Ecuador, France, Guatemala, Italy, Liberia, Nicaragua, Norway, Netherlands, Panama, Paraguay, Portugal, Sweden, El Salvador, Uruguay.

REPAIRS: There are 5 shipyards at Gijon, and work shops specialised in naval works. All types of repairs will be readily attended. It is recommended that advanced notification is given when assistance is required. Electrical power is supplied ex wharf.

CUSTOMS ALLOWANCE: See "Documents".

DRY DOCKS: 3 companies own a total of 6 dry docks at Gijon, the largest of which is 170 m. length, 27.40 m. wide for vessels up to 26,000 tons.

TIME: GMT plus 1 hour.

AIRPORT: The regional airport, named Asturias (in some instances it still is being known as Oviedo) is 45 km. away from the port. There are daily flights linking Gijon with Madrid and Barcelona. There is a bus service for passengers from Gijon to the airport.

HOLIDAYS: Jan. 1st and 6th, March 19th, Maundy Thursday, Good Friday, May 1st and Corpus Christi, June 29th, July 25th, August 15th, September 8th, October 12th, November 1st, December 8th and 25th.

DEVELOPMENTS: New piers are under construction and will be ready for commercial use in 1979.

AUTHORITY: Junta del Puerto de Gijon.

AGENT: Romualdo Alvargonzalez, S.A. Apartado 141, Gijon. Tel.: 344400. Telex: 87366.

HUELVA: 37.16 N. 06.55 W. (See Plan Book)

DOCUMENTS:

3 Crew Lists.
2 Passenger Lists or a negative.
1 Cargo Manifest of goods destined to Huelva.
Another Manifest covering transit cargo.
2 Store Lists, including tobacco, cigars, cigarettes, coffee, spirits, radios, cameras, etc., in possession of crew. In all cases make and number of radios to be indicated.
Safety Wireless Certificate and Safety Equipment Certificate.

If vessel carries over 3 kilos tobacco per man, the excess to be declared in a separate manifest, which must be visaed by the Spanish Consul at the last port, otherwise vessel is exposed to heavy fine.

PILOTAGE: Compulsory. Services from middle to high tide, depending on draft of vessel on arrival or departure. Pilot's motorboat painted white. Letter "P" in black at both bows. Agent must be in close contact with Pilot Office. Pilots are informed by Agent of ETA at bar. In rough weather Pilots will not be available for entries or sailings. Depths of water depend on location, ranging from 15 ft. to 30 ft. in high tide. Pilot station equipped with VHF Channel 16.

Telegraphic address of Pilots – "Practicos-Huelva", 24 hours notice of ETA required.

At night the regulation lights are exhibited. Contact must be made by VHF to take Pilot on board. Regulation ladder required. In the event of bad weather the Pilot will board at Cascajera.

MAX. SIZE: Max. length for entry to Cascajera, 200 m. Max. length for entry from Punta del Sebo to Tharsis Quay, 180 m. Max. draft, permitted 28 ft. 05 in. up to 32 ft. 05 in. depending on the tide.

The entry to port is always subject to tides and maximum sizes of vessels able to proceed to inner quay berths will depend upon the berth and the tidal constant.

HEALTH: As long as Captains of vessels notify Medical Office by cable that there are no sick on board and that the ship proceeds from an area free from contagious diseases as specified by the International Sanitary Regulations, free pratique will be granted to the vessel, although this does not eliminate all the sanitary measures specified in the Exterior Sanitary Regulations in force.

Notice should be given en-route towards the Port of Huelva and sufficiently in advance to permit the free pratique to be granted.

When there is any sickness on board, no operation will be carried out until the vessel or its personnel have been inspected by the Medical Authorities.

The granting of free pratique does not signify that the Yellow Flag may be lowered. This will be done once the Medical Authorities have carried out their inspection or are in possession of the Maritime Health Declaration Form signed by the Captain.

RADIO: Local coastal radio station Huelva-Radio. Working frequency: 1700 kc/s. on VHF. Listens out permanently on 2182 kc/s. and Channel 16.

Hours of service 24 hours (continuous).

National and International Radio traffic – radio conversation, radio-telegrams, advice to navigators.

TUGS: Only used inside harbour. Ship's lines employed, 4 tugs available. Number required to assist vessels at the discretion of the Pilot in charge.

BERTHING: Mineral loading quay – 435 m. mooring length and 12 m. depth of water at LWST. Has 2 loaders of 1,200 t.p.h. each.

Jetty belonging to "Energia e Industrias Aragonesas S.A." for movement of liquid and solid bulk cargo. Has 150 m. mooring, with 8 m. depth of water at LWST. For movement of solids, a gantry crane of 6 tonnes is available, together with 3 tubes for liquids.

Extension of the Fosforico Espanol S.A. jetty consisting of fitting out liquid quay for movement of solid bulk cargo. Has a 7 ft. depth of water, 3×15 tonnes gantry cranes and pipes for conveyance of phosphoric and sulphuric acids.

"Reina Sofia Quay" of the Union Explosivos Rio Tinto S.A. for the movement of liquid bulk cargoes, is 500 m. long and 8 m. draft at LWST. Has 2 berths for vessels up to 6,000 d.w.t., 1 berth for vessels up to 3,000 d.w.t. and 2 berths for lighters and tugs.

Levante (Eastern) Quay: Length 1,200 m. of which 700 m. is for general cargo and bulk cargo. Depth 8 m. Equipment includes 2×12 ton, 2×6 ton and 11×3-6 ton cranes.

STEVEDORES: 48 hours advice to Agent necessary to engage labour.

MEDICAL: Agent must give at least 24 hours advance notice where medical aid is required. There is a provincial hospital. Vaccination certificates against fevers and cholera are issued by the Provincial Health Authority.

TANKERS: Rio Gulf de Petroleos operate a SBM tanker-mooring 7 miles offshore, about 20 miles distant from Huelva. Mooring is suitable for vessels 900 ft. long with draft up to 70 ft. salt water. Mooring 66 ft. is used for discharging only. Discharge rate is about 1,300 t.p.h. through two 12 in. lines and a 30 in. submarine line.

Within Huelva port, Rio Gulf have 2 tanker berths, and Campsa have 1. The 2 berths at the "Torre Arenillas" quay permit a draft of 12 m. at low water but the max. length permitted at the oil quay is 200 m.

Berth No. 1 (North) loading/discharging:

LPG	8 in. line
Gasoline	10 in. ,,
Naphtha	10 in. ,,
Diesel	10 in. ,,
Fuel oil	10 in. and 12 in. lines

Berth No. 2 (South) loading/discharging:

Benzine	8 in. line
Cyclohexan	8 in. ,,
Gasoline	10 in. ,,
Diesel	10 in. ,,
Distillates	10 in. ,,
Fuel oil	10 in. and 12 in. lines

Residues: there is a receiving station near the oil quay for tank residues, together with a product separator. Connection lines are 10 in.

Product	*S.G.*	*A.P.I.*
Propane	0.507	—
Butane	0.573	
Gasoline 85-Ron	0.693	72.68
Gasoline 96-Ron	0.735	61.02
Campsa G.O.	0.832	38.57
R.D. 2494	0.789	47.84
Industrial F.O.	0.945	18.24

DENSITY: Water at this port is salt water. Fresh water, in quantity of 1 in. to 7.5 in., only present in heavy rainy weather.

FRESH WATER: The supply of drinking water is made at the Eastern (Levante) quay at the rate of 20 t.p.h. per vessel. This can also be provided by means of tugs at a rate of 50 and 30 t.p.h.

FUEL: Fuel oil and diesel available in main port. Not available at offshore tanker terminal.

DEVELOPMENTS: Projects are in being to increase depth of water down to 35 ft. for tankers using the Rio Gulf berths, but this implies dredging of bar and channel, a distance of 8–9 miles; it is not known when the project will be completed.

Sand Retention Mole: Once the access road to the mole has been finished which runs through the islands of Cacuta and Slates (right bank of the rivermouth) with a length of 11.5 kms., the construction of the mole proper, 12 kms. long, will start, as far as the last of buoys 1 and 2 at the port entrance. In this way, after a deepening programme of drafts in the access channel, these will be stable with 10.5 m. of water at LWST. Completion expected 1979.

Ingeniero Juan Gonzalo Quay: 902 m. length and 11.5 m. depth of water. It will be used for bulk and general cargo. Completion expected 1979.

GANGWAY/DECK WATCHMEN: The employment is at the discretion of Masters, who are free to either employ or do without any watchmen.

OPENING/CLOSING HATCHES: Normally effected by crew, liner vessels excepted.

CERTIFICATES: Safety Wireless, Safety Equipment and Deratisation Certificates should be at hand for production if requested.

CUSTOMS ALLOWANCE: 200–300 cigarettes per man out of bond. If necessary permit may be obtained from Customs Authorities to open bond and provide crew with fresh supplies, if stay in port justifies procedure. Wine and/or Spirit Allowances: Two bottles per man.

IDENTIFICATION CARDS: Not necessary.

CONSULS:

Belgium
Denmark
Finland
France
Germany
Greece
Holland
Italy
Norway
Panama
Portugal
Sweden

REPAIRS: Any kind in engine room, and hull above water.

DRY DOCKS: Only 1 small dry dock available for vessels up to 3,500 g.r.t.

REPATRIATION: No difficulty in this respect.

AIRPORT: The nearest is at Seville – San Pablo. A distance of 100 km. from Huelva.

TIME: GMT plus 1 hour.

HOLIDAYS: 1st January; 6th January; 20th January; 19th March; Thursday preceding Good Friday as from 1400 hrs. Good Friday; 1st May; Corpus Christi; 29th June; 18th July; 3rd August; 15th August; 1st October; 12th October; 1st November; 8th December; 25th December.

Permit to work on any of the mentioned holidays (1st January Good Friday and 25th December excepted) can be obtained, but sufficient reasons must be given to justify permission.

POLICE/AMBULANCE/FIRE: Police and Civil Guard 215175, 213136; Fire-brigade 214421; Customs 215174.

SHORE LEAVE: Permitted.

TELEPHONES: No arrangements exist, for the time being, to place telephones on board vessels.

AUTHORITY: Marine Military Commandant.

IBIZA: 38.54 N. 01.28 E. (See Plan Book)

DOCUMENTS: *Passenger Liners:*
5 Crew Lists (Customs, Comandancia de Marina, Health, Police and Consignee).
6 Passenger Lists (Customs, Police, Guardia Civil, Obras del Puerto, Health and Consignee).
2 Lists of Crew and passengers personal effects (Customs).
2 Store Lists (Customs).
Health Certificate (Health Department).
2 Cargo Manifest, if any (Customs).
2 Negative Cargo manifest, if no cargo.

Cargo Ships:
5 Crew Lists.
2 Lists of Crew personal effects.
2 Store Lists.
Health Certificate.
2 Cargo Manifests.

PILOTAGE: Pilotage compulsory. No ships allowed to go further than imaginary line between Botafoch lighthouse and Isla Negra del Este, without a Pilot. Advisable to give 24 hours notice of ETA. Shortly VHF will be installed in Pilot station and boats. Pilot's boat is of the canoe type with white sides and letter "P" in black on both sides. Vessels requiring a Pilot must give three long whistles. By night flash morse "G".

Pilot will board between Botafoch lighthouse and Isla Negra del Este. In bad weather vessel should follow Pilot's canoe till he is able to board.

ANCHORAGES: Anchorage area situated inside imaginary line: Botafoch-Negra del Este with depths of 40 to 50 ft. Pilot required to anchor.

MAX. SIZE: Max. length for berthing, 135 m. Maximum draft 21 ft.

HEALTH: Report in advance to pilot if there is any problem. If situation is normal, then, after ship berths the health inspector boards and quickly grants pratique. In event of any suspected disease or fever on board, the Pilot (without boarding), will show the anchorage area, then health inspectors and authorities will board, and give necessary instructions.

Vessels entering after calling at another Spanish port have no problems obtaining pratique.

TUGS: Not available.

STEVEDORES: Available, ETA required 24 hours in advance.

MEDICAL: Civil hospital, military hospital, and 3 private clinics available.

TANKERS: Load/discharge lines 10 in. and 8 in. No facilities for discharging residues. 1 berth. Max. draft of the ship is 21 ft.

FRESH WATER: Available at the quays. 9 m.t.p.h.

FUEL: Available. Notice required 24 hours.

FIRE PRECAUTIONS: Tankers should have a rope over bows, at water level while the ship is berthed.

DEVELOPMENTS: Increasing depths in the port to 7 m. It has also been approved to enlarge berthing quays to 220 m. and 7 m. depth, and build a fishing dock.

GANGWAY/DECK WATCHMEN: Performed by crew.

OPENING/CLOSING HATCHES: There are no fixed rules on this matter: it varies according to the circumstances.

CUSTOMS ALLOWANCE: There is no free allowances.

IDENTIFICATION CARDS: Required.

REPAIRS: There are good work shops and engineers but with limited possibilities. There is a shipbuilder's yard where they build and repair yachts and canoes.

REPATRIATION: Facilities for effecting crew changes and arranging any necessary repatriations.

AIRPORT: 8 km. away, served by scheduled flights daily.

TIME: GMT plus 1 hour.

HOLIDAYS: Cargo work can be arranged on the official holidays with an extra charge of 40% to the workmen.

New Year; Epiphany (6th January); Saint Joseph (19th March); Maundy Thursday: half-day (the evening); Good Friday; Ascension of our Lord (40 days after Resurrection); Saint Joseph the Artisan (1st May); The Holy Heart (last Friday of June); Exaltation to work (18th July); Santiago, Lord of Spain (25th July); Our Lady of the Snows, Lord of Ibiza (5th August); Ascent of Blessed Virgin Mary to Heaven (15th August); Feast of the Hispanicism (12th October); All Saint's Day (1st November); Festival of the Immaculate Conception (8th December); Christmas Day (25th December).

Although not yet official there will be introduced as a holiday Easter Monday and 26th December.

POLICE/AMBULANCE/FIRE: Police 301131; Ambulance 301214; Fire telephone call to the Comandancia de Marina, tel. 301190.

SERVICES: Compass adjusting.

SHORE LEAVE: Crew members are allowed ashore.

AUTHORITY: Comandante de Marina de Ibiza, Comandancia de Marina.

MAHON: Minorca, 39.52 N. 04.18 E. (See Plan Book)

DOCUMENTS: *Health Department:*
Crew List.
Passenger List.
Disinfect and Deratisation Certificates.

Port Authorities:
Crew, Passenger List.
Ship characteristics and other details.
Cargo.
Indication of previous Port and destination.

Customs:
Cargo Manifest.
Bill of Lading (Cargo for this port).
Crew List and Passenger List.

Also the Captain will produce, if required, Log book and passports of crew.

PILOTAGE: Compulsory to take Pilot in entry, departure and any movements within port. On approaching port, during day, ships will hoist flag corresponding to International Code "I need a Pilot". By night, by means of lights, according to International Code.

During day Pilot's boat is recognised by a square blue flag with letter "P" (painted white) in centre of flag. Pilotage area comprises all the estuary, from inside port to outside Capes of La Mola and San Carlos.

ANCHORAGES: Inside are good anchorages, for instance Cala Llorga and Plana de Cala Figueras.

MAX. SIZE: Unlimited length and width, but draft is limited to commercial port, 25 ft.; and to anchorage, 43 ft.

HEALTH: Hoist correct flags of International Signals Code to indicate health situation of ship. Before Pilot boards, he should ask for health situation. If ship suspected, he will lead it to Lazareto anchorage and once anchored Pilot will report by means of Port Authority to Health Department. Port is provided with service of disinfection and means to kill rats. A disinfection certificate can be issued, and although rat killing means are available, no deratting certificate is issued.

Ships coming from Middle East and East Africa should carry certificate of anticholeric vaccination, anti-smallpox, anti-yellow fever and anti-typhus. Also from North Africa and South America. All others only anti-smallpox and anti-typhoid.

BERTHING: Commercial Quay: Length 518 m. average depth alongside 8 m.

Container and Ro/Ro Quay: Length 180 m. depth alongside 6.5 m.

STEVEDORES: Available. Loading and discharge is as follows:

Container Berth: 2 fixed cranes 800 tonnes per day loading and discharge.

Commercial Quay: 2 fixed cranes and 1 mobile crane with a capacity of 1,000 tonnes per day. Priority to regular lines.

MEDICAL: In case of accident or illness of any member of crew medical assistance and hospitalisation will be in civil hospital.

FRESH WATER: Available. 4 points on the Container Quay and 7 points on the Commercial Quay.

FUEL: Available from Campsa at Cala Figueras.

OPENING/CLOSING HATCHES: Carried out by crew before 0800 hrs.

IDENTIFICATION CARDS: Not required.

CONSULS: Italy: Tel. 363393; France: Tel. 363889; Netherlands: Tel. 362703.

REPAIRS: Small repairs possible.

DRY DOCKS: Military dry dock of 2,000 metric tons.

AIRPORT: 5 km. from Mahon – international and national flights.

TIME: GMT plus 1 hour from September to April, and 2 hours from April to September.

HOLIDAYS: Main holidays are: 1st January (New Year), Holy Week (variable), 1st May (Labour Day) Corpus Christi (variable), 24th June – National Holiday, 8th September, local holiday, 25th December – Christmas. Work is possible on all these dates provided the labour force is paid extra.

POLICE/AMBULANCE/FIRE: Police: Tel. 36.37.12; Ambulance: Tel. 36.11.80; Fire Brigade: Tel. 36.39.61.

TELEPHONES: No telephones on the Quays.

AUTHORITY: Capitan de Navio, Comandante Militar de Marina de Menorca.

MALAGA: 36.43 N. 04.23 W. (See Plan Book)

DOCUMENTS:
5 Crew Lists.
5 Passenger Lists or Negative.
1 Cargo Manifest of goods destined to Malaga, as well as of other cargoes in transit.
Store List in duplicate, including tobacco, spirits, radios, etc., belonging to vessel.

Details list in duplicate of all personal effects of the crew and Passengers (tobacco, spirits, cameras, radios, etc.). For vessels bigger than 499 g.r.t., Safety Equipment Certificate.

Note: Tobacco; In case vessel carries more than 3 kilos of tobacco per man, the excess must be declared in a separate manifest, which must be visaed by Spanish Consul. In absence of Consul, said document will have to be visaed by an Authority or Consul of a friendly nation at the former port clearance. Otherwise, vessel may be severely fined.

PILOTAGE: Pilotage is compulsory and service is permanent. Pilots board vessel by cutter in roads, near entrance formed by 2 breakwaters. Pilot cutters are painted white and have letter "P" in black on each bow. Cutters have a blue flag hoisted on mast, with the letter "P" in white, at both sides of flag. At night, cutters have white light, and under this light, red one. Entrance between breakwaters is 320 m. wide and easily accessible. When weather in the roads is bad, which seldom happens, vessels approach as close as possible to entrance in order that Pilot can board easily.

ANCHORAGE: Vessels can anchor outside of breakwaters, in roads in depths of 60 – 70 ft. Anchoring is prohibited in vicinity of tanker moorings, the Pilot will advise best position. Weather is bad occasionally when East wind blows, during Winter.
MAX. SIZE: No restrictions in respect of length or breadth. Max. advisable draft to enter port is 31-32 ft.

The tanker sealine berth can accept vessels up to 300,000 d.w.t.

Largest vessels to enter port: Passenger ship "Oriana" length 245 m. Draft on entering and leaving 9.14 m. Tanker, 49,581 d.w.t. length 225 m. draft 12.48 m.

Largest tanker at buoy mooring 239,786 d.w.t., length 334 m. Draft on entering and leaving 19.81 m.
HEALTH: If vessels proceed directly to berth, pratique can be obtained immediately after berthing. In case of any suspected disease or fever on board, Master must radio to Agents, in order that they can advise Health Office.
RADIO: Nearest important radio station is Cadiz, or Gibraltar and Aranjuez. Master's messages should be received at least 24 hours before arrival.
TUGS: Ship's lines are used, tug-boats are employed according to Pilot's advice, and upon request. 8 tugs available, 450 h.p.–2,250 h.p.
BERTHING: Pilots will advise Masters whether vessel has a free berth or not. Also if she has to anchor in roads. Further particulars can also be obtained from Pilot.

Berth No.	*Length (m.)*	*Depth (m.)*	*Remarks*
1	350	9.4	General cargo,Bulk and Passengers.
	99	8.0	General
2	483	10.5	General Cargo, Bulk and Passengers
3	181	8.0	Passenger Quay
	140	7.0	Passenger Quay
4	477	8.0	General cargo, Bulk and Passengers.
5	101	6.5	Armament
6	215	7.0	Bulk solids and Bulk liquids.
	300	8.0	Petroleum
7	145	9.4	Fish
8	128	5.0	Storage
	135	5.0	Fish

SPECIALISED CARGO-HANDLING FACILITIES: Quay No. 2 includes 15,000 tons silo for grain, loading and discharging capacity 200 t.p.h.

Quay No. 6 can handle all cargo in bulk. Also 3 ton forklifts and a Hyster 620 capable of handling containers up to 26 tons. There are regular car ferries for passengers and cargo, roll-on/roll-off plying daily with Tangiers and weekly with Genoa, Marseilles and Casablanca, all of them direct. For butane gas a special pier built outside the port Westward, along the beach in front of the depot. For LPG and chemicals the inner side of the Western breakwater can be used, though loading and unloading has to be done into tank trucks. 20 ft. containers can be handled with a Hyster forklift with appropriate spreader, eventually 30 ft. containers also.
CRANES: 27 quay cranes with capacity up to 15 tons and 1 mobile crane with capacity of up to 8 tons.
STEVEDORES: It is important that Master sends advance message regarding the vessel's ETA. Agents can inform Shippers or Receivers' stevedores accordingly, to arrange operations properly. Official working hours of port are: Monday/Saturday 0800 – 1200, 1400 – 1800 hrs.
MEDICAL: Any kind of medical service can be arranged. In case a crew member needs medical attendance urgently, it is advisable that the Master radio in advance.
TANKERS: Petroleum handled at Quay Nos. 6 and 7. Depths 8 m. and 9.4 m. respectively. Also at the New Tanker berth, depth alongside 13.50 m. (see "Max. Size").

Quays No. 5, 6 and 7: Operator: Demagrisa. Crude oil discharge pipe-line – 250 t.p.h. Refined oil discharge pipe-line – 300 t.p.h.

Playa Misericordia: Operator: Calvo Sotelo. Sea-line for discharging tankers up to 250,000 d.w.t. Max. discharge rate 6,000 t.p.h. through 2×30 in. pipe-lines.

Operator: Butano. Sea-line for butane which also handles propane. Max. discharge rate 300 t.p.h.

Quays Nos. 6 and 7: Operator: Anomiaco Espanol SA. 4 lines for naphtha discharge. Rate 210 t.p.h.

Operator: Calvo Sotelo. 4 discharge lines for oil. Rate 1,500 t.p.h.

Tanker Quay: Operator: Calvo Sotelo. Crude oil pipe-line, diameter 24 ins. with 2 discharge arms and 1 spare. Discharge capacity 2,000–2,500 t.p.h.

Quay Nos. 6 and 7: Operator: Campsa. 4 pipe-lines available, 2×10 in., 1×12 in. and 1×14 in. maximum pumping rate 800 t.p.h.
DENSITY: 1025.
FRESH WATER: Always available. Deliveries are performed directly from the quay, rate 20–200 t.p.h. or occasionally by tugs. Minimum tonnage, 17 tons, occasionally supplies by tank-barge.
FUEL: Ordinary fuel oil and gas oil are available at local refinery of "Campsa". It is advisable that Shipowners contract bunkers through their own contractors, with anticipation of 48 hours, so that order can be received in time. Delivery can be performed at bunkering pier at a rate of 60 t.p.h. or by car tankers.
FIRE PRECAUTIONS: Tankers perform their operations at the private berths of "Campsa" which have necessary fire precautions.
DEVELOPMENTS: An extensive plan to increase facilities of port, and for building new piers. Other important work being effected at breakwater, to erect new piers for large passenger ships.
GANGWAY/DECK WATCHMEN: Available but not compulsory.
OPENING/CLOSING HATCHES: This work effected normally by crew, except in liner vessels, which is contracted by stevedores.
CERTIFICATES: Vessels should have the usual documents on board, but only Safety Wireless, Safety Equipment and Deratisation Certificates are required by authorities.
CUSTOMS ALLOWANCE: Normally, customs permit 200 cigarettes per man out of bond. 1 bottle of spirit for each crew member.
CARGO GEAR: Usually shore cranes of 2-3-6-15 tons lifting power employed in loading or discharging operations, if vessels require any lightening then vessel derricks are employed, as only 1 floating crane is available at the port of 25 tons and 15 m. height.
IDENTIFICATION CARDS: Not required.
CONSULS: Practically all countries have consulates at Malaga.
REPAIRS: Facilities of a limited nature.
DRY DOCKS: There is a floating dock for vessels up to 2,000 tons.
REPATRIATION: Good facilities.
AIRPORT: The airport is about 8 km. from town. Daily services with Madrid, Barcelona, Seville, Valencia, Tangier and Melilla. Also direct flights to London, Paris, Amsterdam, Brussels, Frankfurt, Stockholm, Helsinki, Geneva, Zurich, Nice.
TIME: GMT plus 1 hour.
HOLIDAYS: 1st January; 6th January; St. Joseph (19th March); Good Thursday afternoon; Good Friday; Labour Day (1st May); Ascension Day; Corpus Christi; St. Peter and St. Paul (29th June); National Holiday (18th July); 25th July; 15th August; 12th October; 1st November; 8th and 25th December.
POLICE/AMBULANCE/FIRE: Police, Tel. 211302; Ambulance, Tel. 275250; Fire, Tel. 234567.
AUTHORITY: Junta del Puerto de Malaga.

MOTRIL: 36.43 N. 03.30 W. (See Plan Book)

DOCUMENTS:

Health Certificate.
5 Passenger Manifests (1 Health, 2 Customs, 1 Police, 1 Agent).
4 Crew Manifests (1 Health, 2 Customs, 1 Agent).
2 Store Lists (for Customs).

PILOTAGE: Arranged by Agent basis ETA given 24 hours in advance. Pilot boat distinguished by painted "P". Night pilotage possible approx. 100% extra, on holidays 50% extra. Vessels await Pilot just outside port. Pilot compulsory for all foreign vessels and Spanish vessels arriving from abroad. Pilot should be requested when 1 mile from the port by means of international signals.
ANCHORAGE: Area near port. The roads to the East of the port have very little depth. The sea is rough in this area and vessels can run the serious risk of beaching. The best location for anchorage is outside the port 0.25 miles S.S.W. from the port entrance, in 14 to 25 m. of water, mud bottom.
RESTRICTIONS: None, vessels may enter day or night.
MAX. SIZE: Entrance 33 ft. at LWS. Maximum draft alongside quays, 27 ft.
HEALTH: Free pratique given on board.
RADIO: Harbour tugboats and pilot operate on VHF Channel 12.
TUGS: Available. One tug 500 h.p. One tug, 1,000 h.p. expected at a later date.
BERTHING: There is 470 m. of quayage with a depth of 8.2 m. (27 ft.) at LWS and 107 m. of quayage with a depth of 6.4 m. (21 ft.) at LWS.
CRANES: There are 5 electric cranes of 3.5 to 6 tons capacity; three 6 ton and one 3 to 6 ton mobile crane.
BULK CARGO FACILITIES: Muelle de Levante: 300 m. length. Maximum shipdraft 8.2 m. (27 ft.) at LWS. Three cranes 6 ton capacity for handling bulk cargoes (grain, ore, coal, fertilisers, etc.). Loading/discharge rates: 300 t.p.h. One crane 3.5 to 6 ton for handling general cargoes.
Muelle de Poniente: 110 m. length. Maximum shipdraft 6.4 m. (21 ft.) at LWS. Two cranes 3.5 to 6 ton capacities for handling bulk and general cargoes.
Muelle de Costa: 160 m. length. Maximum shipdraft 8.2 m. (27 ft.) at LWS. Two cranes 3.5 to 6 ton for handling general cargoes.
SPECIALISED CARGO-HANDLING FACILITIES: Muelle de Poniente equipped for handling liquid chemicals and asphalt, by lines.
STEVEDORES: No ETA advice necessary. Agents arrange gangs.
MEDICAL: No advance notice required. All facilities available.
TANKERS: Vessel about 8,000 tons. No special requirements.
DENSITY: Normal Mediterranean.
FRESH WATER: Available alongside all quays.
FUEL: Available at Muelle de Levante. Rates of delivery: 200 t.p.h.
GANGWAY/DECK WATCHMEN: Agent arranges.
OPENING/CLOSING HATCHES: Crew open and close hatches.
CUSTOMS ALLOWANCE: Tobacco: About 100 cigarettes per man. Wine and or spirit. None.
IDENTIFICATION CARDS: Not necessary.
CONSULS: None in Motril. The nearest Granada or Malaga.
REPAIRS: Minor repairs can be affected. There is a slipway for vessels up to 150 tons.
REPATRIATION: Facilities available.

AIRPORT: The nearest airports Malaga 105 km. Granada 70 km. and Almeria 120 km.
TIME: Local time GMT plus 1 hour.
HOLIDAYS: New Year's Day (January 1st), Epiphany Day (January 6th), Vote Day (January 13th), Good Thursday, Good Friday, Wort's Day (May 1st), Santiago Day (July 25th), Assumption Day (August 15th), Pilar's Day (October 12th), Saint's Day (November 1st), Immaculate's Day (December 12th) and Christmas Day (December 25th).

Work can be arranged on above days, however dependent upon permission of the Work Authority.
POLICE/AMBULANCE/FIRE: Police 601221; Ambulance 600200; Fire 600200.
TELEPHONES: No facilities for placing telephones on board.
SHORE LEAVE: Crew members are allowed ashore.
DEVELOPMENTS: One Roll-on/Roll-off facility on Muelle de Costa. One berth of 150 m. length and 10 m. (33 ft.) depth.
AUTHORITY: Grupo Puertos De Granada-Almeria. Direccion del Puerto. MOTRIL (Granada).

PALAMOS: 41.50 N. 03.08 E.

DOCUMENTS:
3 Crew Lists.
1 Passenger List or negative.
Manifest of goods destination Palamos and in transit.
Store List in duplicate, including tobacco, spirits, radios, etc., belonging to vessel.
Detailed list in duplicate of all personal effects of crew and passengers (Tobacco, spirits, camera, radios, etc.).

Tobacco – any excess over 3 kilos per person must be stated on a separate manifest duly visaed by Spanish Consul.

If on inspection differences are found (more or less), articles removed and heavy fine imposed.
PILOTAGE: Pilotage is compulsory and service is permanent. Often no berths available between 2400 and 0600 hrs. owing to port occupied by fishing boats. Pilot is informed by Agent of vessels ETA given 24 hours in advance. When vessels approach the breakwater, Pilot will board. Pilot boat is white with a black "P" painted on the side.
BERTHING: Depth of water in centre of harbour 42-52 ft. Commercial Wharf length: North 689 ft., depth 18-26 ft. South 246 ft., depth 15-24 ft. Pier Wharf or breakwater: not available for commercial traffic. Length 2,100 ft.
RESTRICTIONS: None but for draft. Vessels carrying dangerous cargo should get authorisation for berthing prior to arrival of the ship.
MAX. SIZE: No restrictions in respect of length. The maximum advisable draft for berthing is 24 ft. stern, 20 ft. bow.
HEALTH: Pratique is obtained immediately after berthing. In case of suspected disease or fever on board the Master must radio to Agent in order inform Health Office in time.
RADIO: Radio Costera of Barcelona.
TUGS: None but Barcelona's tugs could be hired should the vessel's size make it necessary.
STEVEDORES: Information about ETA time is advisable to get gangs ready.
MEDICAL: Any kind of medical services can be arranged if information received in time.
FRESH WATER: Plentiful supply of water by means of hoses from the pier to vessel.
FUEL: Can be supplied if required.
DEVELOPMENTS: Steps are being taken to get the breakwater in condition to berth tankers and liners.
GANGWAY/DECK WATCHMEN: It is not compulsory but advisable at night.
OPENING/CLOSING HATCHES: Normally opened/closed by the crew, otherwise according to Charter Party.
CERTIFICATES: Usual documents on board. Safety Wireless, Safety Equipment, Deratisation and Registered Tonnage Certificates are the only ones required by the Authorities.
CUSTOMS ALLOWANCE: Crew : 3 kilos tobacco per person. Passengers: 2 kilos per person. Any excess on this amount must be declared on a separate Manifest as in transit. Wine and/or Spirit: only 1 bottle per man. Any excess, must be declared on a separate Manifest as cargo in transit and stowed apart from the tobacco and spirits carried under the Provisions List. This Manifest must be visaed by the Spanish Consul at the last port of call. Any infringement of this regulation will subject the vessel to the immediate imposition of heavy fines and confiscation of the excess tobacco.
IDENTIFICATION CARDS: Not required.
CONSULS:

France	Tel. 314472	Portugal	Tel. 320148
Denmark	,, 314400	Sweden	,, 320850
Italy	,, 320200		

REPAIRS: Only small ones.
REPATRIATION: Good facilities exist.
AIRPORT: Gerona Airport situated at 40 km. distance and half an hour time by car from Palamos. Regular flight services with Madrid, Barcelona, Palma Mallorca, London, and all over the world with transhipment at Madrid and/or Barcelona.
TIME: Always GMT plus 1 hour.
HOLIDAYS: New Year's Day (1st January); The Three Wise Men (6th January); St. Joseph (19th March); Good Thursday – afternoon only; Good Friday; Easter Monday; Whit Monday; Labour Day (1st May); Ascension Day; Corpus Christi; Main Holiday (24th June); St. Peter and St. Paul (29th June); National Holiday (18th July); St. James (25th July); Our Lady's Assumption (15th August); Columbus Day (12th October); All Saints Day (1st November); Immaculate Conception (8th December); Christmas Day (25th December); Second Christmas Day (26th December).
POLICE/AMBULANCE/FIRE: Police 31 41 87; Ambulance 31 43 50; Fire 31 43 50.
AUTHORITY: Captain of the Port.

PALMA, Majorca: 39.34 N. 02.38 E.

PILOTAGE: Compulsory. Order through Agent.
ANCHORAGE; In outer harbour in depths up to 13 m.
RESTRICTIONS: Depth in harbour entrance up to 15 m.
TUGS: Available if required.
VHF: The Spanish Telephone Company has established a station for ship-to-shore communications.
BERTHING: Quays at Puerto Pi with 12 m. depth alongside. Quays at Puerto de Palma with up to 10 m. depth alongside.
FUEL: Supplied at the quays, rate 150 t.p.h.
FRESH WATER: Available at the quays.
AIRPORT: Palma Airport well connected with the Peninsula (mainland) and with foreign airports.

PASAJES: 43.21 N. 01.54 W. (See Plan Book)

PORT LIMITS: In this port a vessel is considered to be an "arrived ship" (subject to C/P Terms) when the Pilot leaves the vessel once she is inside the harbour. Can be on the roads awaiting for berth or alongside the quay. The laytime will commence when the Master has delivered in writing the notice of readiness.
DOCUMENTS:
4 Crew Lists.
2 Passenger Lists or negative.
2 Cargo Manifests with an individual copy of each Bill of Lading for parcels to be discharged at port of Pasajes.
Copy of Manifest covering other cargo on board in transit for other ports.
Stores List in duplicate, including tobacco, cigarettes, spirits, radios, etc., belonging to the vessel.
Detailed Crew's Stores List, in duplicate, of all personal effects pertaining to crew and passengers (tobacco, cigarettes, spirits, cameras, radios, arms, etc.).

For vessels exceeding 499 tons g.r.t. Safety Manifest Certificate; Safety Equipment Certificate, Deratisation Certificate should be on board ready for production.
PILOTAGE: Pilot service is compulsory and permanent. Pilots board vessel in an area about 1.5 miles out from leading lights of port entrance. The telegraphic address is: Corporacion Practicos, Pasajes. Notice should be given 24 hours before arrival; generally Agents keep Pilots informed of vessel's time of arrival when they are advised by Masters. VHF service in operation.

Pilots' cutter is painted in naval-grey with letter "P" painted in white on both sides of bridge; flag with letter "P" in white, is hoisted on cutters' mast.

International pilot signals are used by Pilots, by means of Aldis lamps, when approaching vessel at night. International light and sound signals to be made by vessel when requiring Pilot.

In event of bad weather Pilots cannot board vessel at usual 1–1.5 miles location. Then vessel has to wait for instructions (VHF or radio) for entering port.

With respect to boarding and safety measures the international safety regulations are to be carried out.
ANCHORAGES: A limited number of vessels may anchor in roads inside the port, in good shelter. Depth in area of anchorage is 25–30 ft.
RESTRICTIONS: The entrance channel has a length of 1,200 m., breadth 80–120 m. and a depth of 20 m. LWS. Vessels over 130 m. length must enter at high water and in daylight.
MAX. SIZE: 170 m. length and 28 ft. draft. When dredging works are completed in the entrance channel, the port will be able to accept vessels of up to 180 m. length and 30 ft. draft.
HEALTH: If vessels proceed directly to berth pratique can be obtained immediately upon berthing. If vessels anchored in bay, pratique can be obtained after anchoring. In case of any suspected disease or fever on board, the Master must advise the Agents, by radio, in order they inform the Sanitary Authorities in advance.
RADIO: Nearest Radio Station is Cabo Mayor Radio. Messages by radio-telephone can be transmitted via Radio Arcachon (France). Notice of ETA should be sent to Agent 24 hours before arrival.
TUGS: No tug-boats required for vessels of normal steering when entering port. Tug-boats are required for berthing or shifting to and/or from quays Muelle De Ancho, Muelle De Molinao, Muelle De Capuchinos for vessels from 80 m. length on. Ship's lines are used and tug-boats are employed according to Pilot's advice.

11 tugs available, the largest being 800 and 1,250 h.p. respectively.

BERTHING: Berths are appointed by Port Authorities after notice of arrival and information regarding cargo given by Agent. Pilots inform Masters of location of berth appointed, if any. No tidal difficulties for berthing or shifting inside the port.

Berths belonging to Port Authority.

Name	*Length* (m.)	*Depth* (m.)
Ancho	305.40	10.00
Molinao	348.60	10.00
Capuchinos	298.30	10.00
Petroleos	159.50	10.00
Lezo. 1	298.40	10.00
Lezo. 2	163.20	10.00
Transatlantic	234.10	8.00
Avanzado (North)	63.60	6.00
Avanzado (East)	114.60	6.00
Avanzado (West)	120.30	6.00
Petrol Basin	50.00	6.00
Herrera	422.80	5.00
Reloj	240.00	5.00

CARGO HANDLING: Berth equipped for containers with two cranes of 12 tons. A new quay under construction for roll-on/roll-off traffic. There are two berths for discharging through pipe-line; tallow, codfish-oil, etc.

Whenever a vessel arrives with inflammable products, such as gas, propane, etc., the quay where vessel is discharging is fenced off.

CRANES:

No.	*Capacity* (metric)
8	3 tons
13	3.5–6 tons
13	6 tons
1	6–10 tons
7	12 tons
2	30 tons

STEVEDORES: ETA advice should be received by Agent 24 hours before arrival in order arrange loading/unloading operations with stevedores. The official working time in the port is: Monday/Saturday 0800 to 1200 hrs. and 1330 to 1730 hrs.

MEDICAL: Any kind of medical assistance is available. In case urgent surgical or medical assistance required on vessel's arrival, Agent should be informed in plenty of time to make the necessary arrangements.

No particular inoculations required or vaccination/fever certificates to be produced unless epidemic at last or recently visited ports.

TANKERS: Slop discharge to shore possible under agreement. Oil/tallow/asphalt-carriers berth alongside quays with 30 ft. of water. Diameter of discharge shore-lines are 6 in. and 8 in.

FRESH WATER: Fresh water available at all wharves. Rate of delivery 70 cu/m. per hour.

FUEL: Fuel supplied at Ancho, Molinao, Capuchinos and Petroleos Wharves by CAMPSA. Rate 100 t.p.h. Owners should stem the bunkers with CAMPSA 48 hours before delivery.

FIRE PRECAUTIONS: No specific precautions required unless the vessel carries inflammable cargo. Special harbour fire-fighting corps.

DEVELOPMENTS: Extensive developments respecting the construction of new quays and amelioration of the entrance channel are actually under way. The works in the entrance channel will permit a draft and length increase.

GANGWAY/DECK WATCHMEN: Not compulsory. Shore watchmen available.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CERTIFICATES: To be produced if required, specially Safety Wireless, Safety Equipment and Deratisation Certificates.

CUSTOMS ALLOWANCE: In case the vessel carries more than 3 kilos tobacco per crew member and more than 2 kilos per passenger, the excess must be declared in a separate Manifest which must be legalised by the Spanish Consular Authorities. In absence of Spanish Consular Authorities that Manifest will have to be legalised by an Authority of last port of clearance wherefrom the vessel proceeds. Prudent, limited amount of spirits allowed per man.

IDENTIFICATION CARDS: Not required.

CONSULS: Consulates/Vice-Consulates at San Sebastian and/or Pasajes:

Argentina
Belgium
Brazil
Colombia
Costa Rica
Chile
Denmark
El Salvador
Finland
France
Germany
Great Britain
Greece
Italy
Netherlands
Norway
Panama
Paraguay
Peru
Portugal
Sweden

REPAIRS: Repair shops and shipyards available, where repairs or overhauls may be carried out.

DRY DOCKS: One floating dock 66.27 m. long. 23.25 m. wide, 9.125 m. draft. with lifting power of 1,900 tons. 2 slipways (1 for vessels of up to 1,000 tons – one for vessels of up to 300 tons).

REPATRIATION: Good facilities for repatriation.

AIRPORT: Airport of Fuenterrabia is situated at 15 km. from Pasajes. Regular daily services with Madrid and Barcelona.

TIME: GMT plus 1 hour.

HOLIDAYS: 1st January; 6th January; 19th March; Maunday Thursday (afternoon); Good Friday; 1st May; Ascension Day; Corpus Christi; 29th June; 7th July; 18th July; 25th July; 31st July; 15th August; 12th October; 1st November; 8th December; 25th December.

POLICE/AMBULANCE/FIRE: Police 351841; Ambulance 414148; Fire from 0800 to 1930 hrs. tel. 351400, from 1930 to 0800 hrs. tel. 352391; Red Cross (local) 351032; Hospital, San Sebastian, 423632.

TELEPHONES: No possibility of placing telephones on board.

SERVICES: Divers, compass adjusting.

SHORE LEAVE: Crew allowed to land immediately upon arrival.

AGENT: Sobrinos De. M. Camara Y Compania, Telegrams "Camara". Tel. 357045, 357046 and 357047. Telex 36241.

(Shipbrokers, Customs/Forwarding Agents, Chartering Agents, Lloyd's Sub-Agents.)

RIBADEO: 43.33 N. 07.05 W.

DOCUMENTS:

Manifest of Cargo, including cargo in transit.
3 Crew Lists.
2 Passenger Lists or negative.
2 Stores Lists.

If vessel carries over 3 kilos tobacco per man, the excess to be declared in a separate manifest which must be visaed by Spanish Consul at last port, otherwise is exposed to heavy fine.

PILOTAGE: Prior advice of ETA required by Pilot, who boards at the mouth of the river at the time advised by Agent. Pilot boat is white-painted motor launch, carrying international pilot signals.

In case of bad weather, Pilot will instruct vessel by signals to proceed to anchorage or to berth.

The Pilot always boards on the lee side, in the latitude of Isla Pancha.

ANCHORAGE: At Ensenada de Arneo, approx. position 43° 33′ N. 7° 01.6′ W. in depth of 9 m. LW.

RESTRICTIONS: Vessels enter night and day, limited only by draft and state of tide.

MAX. SIZE: Length and beam not limited. Max. draft 15 ft.

HEALTH: Pratique given on arrival on production of clean Bill of Health. International quarantine signals to be used. Port Authorities to be advised if any case of suspected disease or fever on board.

RADIO: Messages may be routed through coastal stations at Vigo, La Coruna or Gijon.

TUGS: None available.

STEVEDORES: Stevedores services operated only by Servicio de Trabajadores Portuarios.

BERTHING: Vessels may berth at the mole at any time, or state of tide, according to draft.

MEDICAL: There are 2 clinics and 1 hospital locally. Advance notice not essential.

DENSITY: 1025.

FRESH WATER: Water connections exist along the length of the mole. Rate, 20 t.p.h.

FUEL: There is a gas oil supply for small vessels, rate 5 t.p.h.

GANGWAY/DECK WATCHMEN: None required.

OPENING/CLOSING HATCHES: Performed by crew.

CUSTOMS ALLOWANCE: 200 cigarettes and 1 bottle wine/spirits per man.

CONSULS: Nearest at La Coruna.

REPAIRS: Minor mechanical repairs can be effected. Slipway for vessels up to 200 tons.

AIRPORT: Nearest at La Coruna, 150 km. away, or Aviles, 165 km. away, with regular services to Madrid.

TIME: GMT plus 1 hour all year round.

POLICE/AMBULANCE/FIRE: Tel. Ribadeo 110650.

AUTHORITY: Ayudante Militar de Marina.

ROSAS: 42.14 N. 03.10 E.

DOCUMENTS:

Crew List.
Passenger List.
(1 of each) Ship's Papers.

PILOTAGE: No Pilots in this port.

ANCHORAGE: Bay of Rosas is anchorage area.

MAX. SIZE: Draft in Commercial Port is 4 m., which berths cargo ships of about 1,000 metric tons of net register.

HEALTH: Once ship is anchored in the bay it requires pratique by means of signals, and by raising the yellow health flag. When vessel entering after calling at another port in the same country, this procedure is not required; Health Inspector boards at the quay side.

RADIO: No radio station in the port, but can contact Coastal Radio Station of Barcelona (1730 kc/s. – 173.4 m.), power 150 W.

TUGS: None.

BERTHING: Advisable during daylight only.

MEDICAL: Port Health Doctor available. Hospitals 18 km. distance.

FRESH WATER: Available at Commercial Port at rate of 8 to 10 metric t.p.h.

FUEL: None available.

POLICE/AMBULANCE/FIRE: Police Service 25-62-72; Ambulance Service 24-21-20; Fire Service 24-10-00.

AUTHORITY: Ayudante Militar de Marina de Rosas.

SAGUNTO: 39.42 N. 00.14 W. (See Plan Book)

PORT LIMITS: The East/West line through the point of Cape Escollera de Levante.

DOCUMENTS:

2 copies Entrance Manifest.
4 copies Crew List.
Passenger List disembarking at this port.
Passenger List in transit.

Refer to "Barcelona" for other important information concerning Documentation.

PILOTAGE: Port is privately owned, and Pilots employed by Altos Hornos del Mediterraneo S.A. As Pilots are employed in Consignees office no separate ETA is necessary. They are sent out to meet vessels as required. Pilot boat is not fitted with radar or VHF. Boat displays signals in accordance with international regulations.

ANCHORAGE: From 155° to 170° from the Cape Canet Lighthouse in 20 m. of water.

RESTRICTIONS: Delays may be caused by berth being occupied. Larger vessels may be delayed by bad weather (the Levante), as dredged channel is narrow.

MAX. SIZE: Draft 29 ft. 5 in. No other limitations.

HEALTH: Pratique can be arranged at any time by Consignees.

RADIO: Cadiz Radio-EAC, Cabo Palos Radio-EAP and Valencia Radio EAV.

TUGS: Normally join vessel either in anchorage or 0.5 mile from entrance. Ship's lines are used. Tugs should be ordered in ETA message also mentioning vessels length and cargo.

BERTHING: Subject to berth occupation and to berthing priority that Altos Hornos gives to different cargoes. Overnight berthing is allowed, in cases of emegency, or for ship safety.

BULK HANDLING FACILITIES: Ore loading pier for Sierra Menera (approx. 1,700 m. in length). Max. draft 48 ft.

CRANES: 10 at 6 tons on the coal quay, 4 at 20 tons, 4 and 60 tons and a 250 ton winch on the new quay.

STEVEDORES: Employed by consignees.

MEDICAL: Medical assistance should be ordered in advance. All kinds of medical assistance available. One hospital owned by Altos Hornos.

TANKERS: No facilities.

DENSITY: Salt water.

FRESH WATER: Available.

FUEL: None available.

FIRE PRECAUTIONS: Fire service organised by Altos Hornos.

GANGWAY/DECK WATCHMEN: Usually by crew. The Civil Guard keep watch on all ships for contraband.

OPENING/CLOSING HATCHES: Effected by ship's crew.

DEVELOPMENTS: Port to be expanded during the next five years to accommodate 300,000 tonners, at specialised cargo handling facilities. (Delayed for time being).

CUSTOMS ALLOWANCE: 200 cigarettes only. One bottle spirits per man but bottle should be opened. Spanish spirits allowed; one bottle per man. No control of Spanish wines.

IDENTIFICATION CARDS: Passport only.

CONSULS: Nearest at Valencia.

REPAIRS: Small repairs possible.

REPATRIATION: Facilities for effecting crew changes and arranging repatriation.

AIRPORT: Manises Valencia, 40 km. away.

TIME: GMT plus 1 hour.

HOLIDAYS: On religious festivals or Sundays no cargo work can be arranged. These are as follows: Our Lady of the Sea (16th July) no cargo work; National Festivity (18th July) no work; National Festivity (25th July) no work; Hispanic Festivity (12th October) no work; Maunday Thursday, work can be done till 1400 hours; Good Friday, no work.

TELEPHONES: None on board. Telephones placed in Boat house and Pilots' office.

SHORE LEAVE: Crew members allowed ashore.

AUTHORITY: Ayudante Militar de Marina.

SAN FELIU DE GUIXOLS (Gerona):
41.46 N. 03.01 E.

GENERAL: Refer to Palamos for all general information.

PILOTAGE: Pilotage is compulsory. Service between 0700 to 2400 hrs.

ANCHORAGE: Vessels arriving after midnight or due to port congestion are anchored outside the breakwater.

MAX. SIZE: The maximum advisable draft for berthing is 22 ft. and up to 115 m. length.

TUGS: No tugs available.

BERTHING: Due to the fact that a few vessels can work at the same time, it is advisable to know as soon as possible the ETA for berthing arrangements.

Commercial Wharf.	Length 108 m.	Depth 22 ft.
Breakwater	Length 116 m.	Depth 22 ft.

A pier for coasting vessels with a maximum draft of 18 ft.

MEDICAL: Any kind of medical services can be obtained in San Feliu or Gerona hospital.

FRESH WATER: By means of hoses from the pier.

FUEL: Can be supplied in small quantities.

CARGO GEAR: Commercial pier is served by an electric crane able to lift up to 6 tons. Normally vessels derricks are used.

SANTANDER: 43.28 N. 03.49 W. (See Plan Book)

PORT LIMITS: Between Cabo Menor and Punta Galizano.

DOCUMENTS:

5 crew lists.
7 passenger lists, or 3 negative.
3 cargo manifests of the goods destined to the port of Santander, 2 sets of manifests for cargoes in transit.
Store list in triplicate, including tobacco, spirits, radios, etc., belonging to the vessel.
Detailed list in triplicate of all personal effects of crew and passengers (tobacco, spirits, cameras, souvenirs, radios, etc.).
For vessels exceeding 499 g.r.t: Safety wireless certificate and Safety equipment certificate.

Legalisation required for manifests covering tobacco and tobacco products. This legalisation to be effected at the port prior to the first Spanish port of call.

Master and each member of crew of vessel can carry for his own consumption up to 3 kilos of tobacco in whatever form, and, if passengers are carried, up to 2 kilos per passenger, all of which must be declared in provisions list (1 kilo of tobacco = 1,000 cigarettes = 100 cigars). If Masters carry greater quantity than stated above, it cannot be manifested as tobacco for consumption on board, but must be included in Consular Manifest as being in transit, and as such must be separated in the holds from other cargo and hatches or lockers will be sealed by Customs until ship leaves Spanish waters. This Consular Manifest has to be legalised by a Spanish Consul. In the absence of Consul, said document will have to be visaed by an Authority of the former port of clearance. Otherwise, vessel would be severely fined.

PILOTAGE: Compulsory and service is permanent. Pilots board vessel by a cutter at the road, near the entrance off Mouro Island. Pilot cutters are painted white and have the letter "P" in black, on each bow. Cutters have blue flag with letter "P" in white, at both sides of flag. At night cutters have a white light, under this a red one. VHF available.

ANCHORAGES: The harbour consists of a large bay which provides good anchorage.

RESTRICTIONS: Entrance is well marked and there is no bar. Depth at entrance is at max. (dependent on tides) 34 ft.

MAX. SIZE: No restriction in respect of length or breadth, the maximum advisable draft to enter port is 34 ft.

HEALTH: If the vessel proceeds directly to berth, pratique can be obtained immediately after berthing. Otherwise, at anchorage at vessel's arrival.

If vessel has sickness on board of a contagious nature Masters should advise Health Authorities by radio, and they will examine patients immediately upon arrival, to enable vessel to be granted free pratique. If vessel has to be fumigated or deratised a charge is made.

RADIO: Nearest important radio station is Cabo Mayor Radio, and it is advisable that messages received at least 24 hours before arrival.

TUGS: No tug-boats required for entering the port, only for berthing or shifting when in port. Ship's lines are used, and tug-boats are employed according to Pilot's advice.

BERTHING:

Berth	*Length* m.	*Depth* m.
Calderon	270	4
Maura	55.6	6.5
Albareda	267	7.25 to 9.5
Almirante	107.2	9.5
Maliano (Sections 10 and 11)	229.1	10.5
Maliano (Section 9)	129	7
Maliano (Section 8)	106.4	5
Maliano (Sections 1 – 7)	710	8
North Edge	538	9.5
Campsa Quays	280	8.5

All depths of water quoted above correspond to LWOST and 13–14 ft. should be added for depths at HWOST. Bottom is generally soft.

Calatrava Wharf: for discharge of chemicals. Depth alongside 34 ft. with overall length limitation of 980 ft. Up River, at Astillero, beyond the harbour area, there is one spout called Orconera Tip for loading iron ore. Vessels up to 260–270 ft. length are allowed with a maximum draft, fully loaded, of 19 ft. Loaded vessels can only sail from that place at high water. A modern installation for dismantling and scrapping vessels is operating up river, on the way to Astillero.

CARGO-HANDLING FACILITIES: There are berths for handling bulk cargoes, grain, ore, coal, etc. There are also berths for handling bulk liquids, chemicals. Berth available for roll-on/roll-off traffic.

STEVEDORES: It is very important that Masters send advance notice regarding vessel's ETA. With this notice, Agents can inform Shippers or Receivers' stevedores accordingly. Official working hours of port, are: Monday/Saturday: 0800–1200 hrs.; 1400–1800 hrs.

MEDICAL: Any kind of medical services can be arranged.

TANKERS: "Campsa" (Spanish State Monopoly): Installation is served by two identical concrete wharves situated in Nueva Montana Basin, berthing space of which is 500 ft. with a depth alongside of 29 ft.

DENSITY: Sea water.

FRESH WATER: Always available. Supply is performed by tug-boats and from shore connections at various quays.

FUEL: Ordinary fuel, diesel and gas oil are available at "Campsa". Advisable that shipowners stem bunkers through their own Contractors, with an anticipation (at least) of 48 hours. Delivery can be performed either by tank-trucks or at bunkering pier.

DEVELOPMENTS: *Extensions:* The entrance channel has been widened to 200 m. and has some depths between 9.5 and 10.5 m.
GANGWAY/DECK WATCHMEN: Not compulsory but available upon request.
OPENING/CLOSING HATCHES: Effected normally by crew, except in liner vessels, which is contracted by stevedores.
CERTIFICATES: Vessels should have the usual documents on board, but only the safety Wireless, Safety Equipment and Deratisation Certificates are required by Authorities.
CUSTOMS ALLOWANCE: Normally, Customs permit 200 cigarettes per man out of bond. Additional quantities needed depend on the stay of ship in port. One bottle of spirit per man.
CARGO GEAR: Shore cranes are usually employed in loading/discharging operations.
CRANES:

Maura Quay	1	fixed 30 ton crane (electric)	
Albareda Quay	3	electric mobile cranes –	3 tons
Maliano Quay (Sections 10 & 11)	6	,, ,, ,,	6 tons
Maliano Quay (Sections 1 to 7)	14	,, ,, ,,	3 – 6 tons
North Edge Quay	4	,, ,, ,,	6 tons
	5	,, ,, ,,	12 ,,

Also movable motor cranes, mechanical shovels and similar, available.
IDENTIFICATION CARDS: not required.
CONSULS:

Germany
Belgium
Bolivia
Colombia
Costa Rica
Chile
Denmark
Ecuador
Finland
France
Greece
Haiti
Honduras
Italy
Monaco
Norway
Great Britain
Panama
Peru
Portugal
Dominican Rep.
Sweden
Guatemala

Note. Acting as Consul of those countries with no Consular Representation: Valentin Lavin del Noval, Dominican Consul.
REPAIRS: Good repair facilities with various shipyards at port. All types of deck, engine, etc., repairs are possible.
DRY DOCKS: Three dry docks, one of which is within the harbour area and the other at Astillero (beyond the harbour area). Dimensions are:

Extreme length	405 ft.	434 ft.	722 ft.
Breadth at entrance	58 ft.	54 ft.	105 ft.
Depth on sill (high water)	23.7 ft.	20 ft.	38 ft.

REPATRIATION: No difficulties.
AIRPORT: About 4 miles from town. There are regular services with Madrid and Barcelona. Also charter flights to U.K. and other European countries.
TIME: Always GMT plus 1 hour.
HOLIDAYS:

January 1st New Year's Day	Full day Work can be arranged
January 6th Epiphany	,, ,,
March 19th Saint Joseph	,, ,,
Holy Thursday – Half day (from noon)	,, ,,
Good Friday	,, ,,
May 1st Saint Joseph Artisan	,, ,,
Ascension Day	,, ,,
Corpus Christi	,, ,,
June 29th Saint Peter & Saint Paul	,, ,,
Labour Day	,, ,,
July 25th Patron Saint of Spain	,, ,,
August 15th Assumption Day	,, ,,
August 26th Anniversary of Santander Liberation	,, ,,
August 30th Martyrs' Day	,, ,,
September 15th Virgin La Bien Aparecida, Patron of Santander, Full day, work can be arranged	
October 12th Holiday of Hispanicism	Full day Work can be arranged
November 1st All Saints	,, ,,
December 25th Christmas Day	,, ,,

POLICE/AMBULANCE/FIRE: Police 222543; Civil Security Guards 232004; Hospital, Casa de Socorro 221214, Valdecilla 231400; Fire 231662; Ambulance Cruz Roja 270235.
TELEPHONES: On very special instances, can be arranged.
SERVICES: Available for tank cleaning, washings, compass adjusting, hull cleaning whilst floating, radio installation repairs, etc.
SHORE LEAVE: Crew allowed ashore at any time.
AGENT: Modesto Pineiro y Compania, S.R.C. PO Box 14, Paseo de Pereda, num. 27, Santander.
Telegrams "Pineiro-Santander". Tel. 220000. Telex 35832. (P & I Club representatives, Shipbrokers, stevedores and chartering Agents, Lloyd's Sub-agents, Car Ferries. Greek, Netherlands and Peruvian Consulates.)

SEVILLE: 37.25 N. 06.00 W.

DOCUMENTS:
3 Crew Lists.
3 Passenger Lists.
2 Cargo Manifest, including cargo for discharge and in transit.
Declaration of Health.
2 Lists of Provisions and Stores.
2 Copies of Bills of Lading.

If vessel carries over 3 kilos tobacco per man the excess to be declared in a separate manifest which must be visaed by Spanish Consul at last port, otherwise is exposed to heavy fine.
PILOTAGE: *At the Bar:* Vessels may commence to enter and leave the river 1.5 hours after low water. Bar Pilots are stationed a Chipiona and come out to board vessels when requested, 2 miles North of Chipiona Lighthouse.

Pilot motor launches about 9 m. long, painted white with black "P" on sides. They carry regulation lights and signals day and night.

River Pilots: Vessels should radio their ETA at least 24 hours in advance to "Practicos Sevilla". River Pilots are stationed at the pier at Bonanza, 36.48 N. 06.20 W. Sound signal to call Pilot is 3 long blasts. Pilot boards from white-painted launch marked by black letter "P" and carrying regulation signals. Pilots require means of embarkation in accordance with International Conventions.
ANCHORAGE: At Bonanza, in depth of 20 ft. below chart datum.
RESTRICTIONS: Navigation in the river above Bonanza is prohibited at night to vessels of more than 115 m. length, and 18 ft. draft, and to tankers or vessels with dangerous cargoes.

Draft is controlled by height of tide and this should be ascertained by Owners or Agents in advance for the probable date of entry.
MAX. SIZE: Length 185 m., beam 24 m., max. draft about 24 ft. dependent on height of tide. Tankers are required to have an additional 1 ft. keel clearance.
HEALTH: Pratique is obtained on arrival at Bonanza, on presentation of International Health Certificates.
RADIO: Coastal stations of Cadiz, EAC, or Aranjuez, EAD 3.
TUGS: Normally join vessel in the anteport. Ship's tow line is used.
BRIDGES: Vessels berthing at Delicias Quay must pass through the Alfonso XIII drawbridge. May be opened at any time of day.
STEVEDORES: 24 hours notice should be given by Agents and confirmed 12 hours before vessels arrival.
MEDICAL: All medical and hospital facilities available.
TANKERS: There are 2 berths, depth alongside 20 ft.
At Quay No. 2, hoses 8-in. diameter.
At Quay No. 3, hoses 8 and 10-in. diameter.
DENSITY: Fresh water. The tide has no influence at Seville.
FUEL: All grades available.
GANGWAY/DECK WATCHMEN: Not considered necessary. All quays are watched by the Guardia Civil.
OPENING/CLOSING HATCHES: Performed by ship's crew.
CUSTOMS ALLOWANCE: 3 kilos tobacco per crew man, and 2 kilos per passenger; this includes tobacco in bonded stores. No restriction on wines/spirits.
IDENTIFICATION CARDS: Not required.
CONSULS: The following countries are represented at Seville:

Belgium
Bolivia
Colombia
Cuba
Chile
Denmark
Dominican Republic
Germany, Fed. Rep.
Great Britain
Greece
Honduras
Italy
Liberia
Nicaragua
Netherlands
Panama
Peru
Portugal
Sweden
Uruguay
Venezuela
United States

REPAIRS: All types of repairs can be effected.
DRY DOCK: Astilleros Espanoles S.A. have 1 dock, length 149 m., breadth 25 m.
REPATRIATION: All facilities available.
AIRPORT: Situated 12 km. away, regular daily flights to Madrid, Barcelona, other parts of Spain. Some transatlantic flights.
TIME: GMT plus 1 hour, all year round.
HOLIDAYS: 1st January; 6th January; 19th March; Maundy Thursday; Good Friday; 1st May; Ascension Day; Corpus Christi; 29th June; 12th October; 1st November; 8th December; 25th December. All holidays may be worked with overtime.
POLICE/AMBULANCE/FIRE: Police: 091; Fire Brigade: 232123; Ambulance: 231945.
TELEPHONES: Can be installed on board if requested 10 days in advance.
SHORE LEAVE: No restrictions.
SERVICES: Fresh provisions and stores available, refuse collection, correction of compasses.
AUTHORITY: Comandancia Militar de Marina.

SOLLER: Majorca, 39.47 N. 02.46 E.

DOCUMENTS: See "Bilbao".
PILOTAGE: None available. 2 intermittent lights situated on the Mola indicate the Entry Channel.
MAX. SIZE: Advisable length and draft 60 and 4.50 m. respectively.
TUGS: None available.
MEDICAL: It is advisable to give advance notice if medical attention is required. There are no hospitals. Medical service is available 5 km. from the port.
FRESH WATER: Not available at the quay.
FUEL: None available. If required the order should be placed to Campsa through the Agent.
GANGWAY/DECK WATCHMEN: Crew do this operation.
OPENING/CLOSING HATCHES: Crew.
IDENTIFICATION CARDS: It is advisable to have these available.
CONSULS: None.
REPAIRS: No facilities exist.

AIRPORT: The airport is situated 40 km. away; the island is well connected with the Peninsula (mainland) and with foreign airports.
TIME: GMT plus 1 hour.
SHORE LEAVE: Allowed.
AUTHORITY: Jefe Encargo del Despacho de Buques, Oficianas del Destacamento de la Comandancia Militar de Marina en Soller.

TARRAGONA: 41.06 N. 01.17 E.

DOCUMENTS: Cargo Manifest of all goods in ship, stating any foreign port from where those goods come. This procedure should always be done in the first Spanish port.

In first Spanish port ship should produce an Itinerary Manifest; and those ships which carry goods to discharge should produce this Manifest in those ports in which they will discharge the goods.

Supplies Certificate for those ships not having any goods to discharge in any Spanish port, or who have previously been in other Spanish port.

Register of the Supplies and Equipment in ship.
Register of the Crew's Belongings, if the ship comes directly from a foreign port.
Passenger List (if there are passengers). Negative Passenger List (if there are no passengers).
Crew List.
Health Certificate, if the ship comes from another Spanish port.

PILOTAGE: Every ship upon arrival should note following signals: During day, hoist flag letter "G" of International Signals Code. Acoustics signal, three long whistles. During the night, flash signal letter "G" of code or the letters "PT". Cable Address: Practicos Puerto Tarragona. VHF station Channels 16, 14, 12 and 9.

Pilot boats: White colour with letter "P" painted on both sides. Lights: according to International Regulations. Pilotage area begins at a max. distance of 2 miles from port entrance. Ships awaiting for Pilot anchor in the Rada and East of the lighthouse. If weather does not allow, Pilot will meet ship at port entrance. Ladder for Pilot to be placed at leeward side.

ANCHORAGE: The West limit is marked by imaginary line running N./S. at the end of the breakwater. East limit is marked by imaginary line between the Paseo de Sta. Clara with the cathedral tower. Depths in Rada are 16 m. and 30 m.; quite good for anchoring (mud and sand).
RESTRICTIONS: No restrictions to enter port during day or night. No tides.
MAX. SIZE: Max. length 260 m., max. draft 38 ft. 06 in. Outside port the plant of Pantalan de Assesa, 1 mile West of lighthouse, allows berth of tankers up to 30,000 tons d.w.t. Enpetrol, 60,000 d.w.t.
HEALTH: Hospitals and clinics available. There is a doctor service in health department of port, which is authorised to vaccinate, and give certificates against yellow fever authorised by the OMS.
RADIO: No radio station.
TUGS: Six tugs. Tugs join vessel outside port. Ship's lines are used.
BERTHING: All berths are made of stone with rubber protection every 20 m. in the port. In Pantalan de Assesa and Pantalan Enpetrol, quays over iron pillars and berth is on the platform.
STEVEDORES: Advisable to report ETA, in order to have all the necessary equipment and necessary number of workmen required for operations. If there are not enough cranes at a given time, own ship equipment is used.

General Cargo: Estimated speed of 80–100 tons per person in a working day of 8 hours, except in particular cases due to the nature of the cargo.

Cargo in Bulk: Speed varies according to the nature of the goods. For instance:
Minerals: 500–800 tons per person in a working day of 8 hours.
Grains: 400–600 tons per person in a working day of 8 hours.
Goods in bags: 150–200 tons per person in a working day of 8 hours.

GANGWAY/DECK WATCHMEN: Not compulsory, if Master requires them he is provided with specialised staff for this purpose.
OPENING/CLOSING HATCHES: Although this work is normally carried out by crew it can be done as well by the stevedores if required at extra charge.
TANKERS: Outside the port there is berthing for oil carriers at Pantalan of Assesa, Pantalan Enpetrol and monobuoy for large tankers.

Storage of residues: There is a plant for slop (residue) discharge facilities connected with all platforms of the Pantalan and plant of residues disposal is available to all vessels.

There are 3 platforms to berth with the following drafts: Platform "A" – 38 ft. Platform "B" – 29 ft. Platform "C" – 23 ft. In inner port there are berths to discharge refined goods available to the tankers of the Compania Arrendataria of the Oil Monopoly.

Pantalan Enpetrol with 3 platforms; Platform 80S – 49 ft. Platform 35T – 49 ft. Platform 35S – 43 ft.

FRESH WATER: Supply of fresh water by means of an underground pipe in all the commercial quays of the port.
FUEL: Available. The grade of viscosity available is below 20 E. to 50 C. Request of this supply should be done with 24 hours notice through the Commercial Agent of Campsa.
DEVELOPMENTS: Building of quay in Levante Dock, with a length of 550 m. and 12 m. draft, with a probable extension of another 300 m. of quay with 14 m. draft. The draft in the port will then be 12.70 m. and in the entrance channel 13.40 m.
CUSTOMS ALLOWANCES: It is permitted to have a packet of tobacco per person per day. Unlimited allowance with national drinks.
CREW IDENTIFICATION CARDS: Not required.
CONSULS: Various available.
REPAIRS: Small repairs available.
DRY DOCKS: None.
REPATRIATION: Facilities exist.
AIRPORT: The town of Reus 12 km. distance has a military airport that is also used for charter flights and regular flights to Madrid.
TIME: GMT plus 1 hour.
POLICE/AMBULANCE/FIRE: Police 20–11–29; Ambulance at local hospitals; Fire 20–19–50.
SHORE LEAVE: Allowed.
AUTHORITY: Capitan del Puerto en Comandancia Militar de Marina.

TORREVIEJA: 37.58 N. 00.40. W.

DOCUMENTS:
2 Crew Lists.
Customs Documents.
Health Declaration.
Manifests.
Bills of Lading are done by Agents.

PILOTAGE: Requested by Agent. Permanent service. White-painted boat with letter "P" on sides. Pilot goes out of port as far as 1 mile.
ANCHORAGE: Outside, 0.5 mile off lighthouse of Eastern quay. Inside, according to Pilot's judgement.
MAX. SIZE: Unlimited length and breadth; limiting draft 27 ft.
RADIO: Alicante Coastal Radio.
TUGS: None available.
BERTHING: West quay is 220 m. long with a depth of 10 m. used only for loading salt, 200-400 metric t.p.h.
STEVEDORES: Available, employed by the consignees.
MEDICAL: Hospital situated 45 km. distance. Medical services and Emergency Clinic in port.
DENSITY: 1034.
FRESH WATER: Available at the quay. Price 50 pesetas per metric ton.
FUEL: None available.
GANGWAY/DECK WATCHMEN: If required can be contracted.
OPENING/CLOSING HATCHES: Carried out by crew.
CUSTOMS ALLOWANCE: 200 cigarettes. 2 bottles of wine.
IDENTIFICATION CARDS: Not necessary but convenient.
CONSULS: Sweden Vice-Consul 101; Norway, Denmark and Liberia Vice-Consul 135.
REPAIRS: Small repairs in engines, electrical, etc.
REPATRIATION: There are no problems in this respect.
AIRPORT: 30 km. distant at Alicante. Regular flights to Madrid.
TIME: GMT plus 1 hour.
HOLIDAYS: See Huelva.
POLICE/AMBULANCE/FIRE: Police tel. 99, Ambulance and Fire tel. 83.
TELEPHONES: There are no connections on board. 1 on the quay.
SHORE LEAVE: No restrictions.
AUTHORITY: Ayudante Militar de Marina and Captain of the Port.

VALENCIA: 39.27 N. 00.19 W. (See Plan Book)

DOCUMENTS:
3 Crew Lists.
2 Passenger Lists or a negative.
1 Cargo Manifest of goods destined for the port.
Another manifest covering transit cargo.
2 Store Lists, including tobacco, cigars, cigarettes, coffee, spirits, radios, cameras, etc., in possession of crew. In all cases make and number of radios to be indicated.
Safety Wireless Certificate and Safety Equipment Certificate.

If vessel carries over 3 kilos tobacco per man, the excess to be declared in a separate manifest, which must be visaed by Spanish Consul at the last port, otherwise vessel is exposed to heavy fine.
PILOTAGE: Pilotage is compulsory for this port. Day and night service. The pilot launch is painted black with a letter "P" painted in white on the sides.
ANCHORAGE: There is a good anchorage outside the port, vessels are required to keep the entrance channel clear.
RESTRICTIONS: Entrance to the port faces S.S.E. and is 260 m. wide, with a low water depth of 15 m.
MAX. SIZE: The following size vessels have entered the port.

GRT	*LOA*	*Draft*
32,280 tons	273 m.	10.00 m.
44,992 tons	255 m.	11.58 m.
44,688 tons	257 m.	13.30 m.

HEALTH: If the vessels proceed directly to berth, pratique can be obtained immediately after berthing. Otherwise, at anchorage at vessel's arrival.

If vessel has sickness on board of a contagious nature Master should advise Health Authorities by radio, and they will examine

patients immediately upon arrival, to enable vessel to be granted free pratique.
RADIO: Coastal radio station with international frequencies 1580 kHz. ETA to be sent to Agent in advance.
TUGS: Not compulsory for entering port. 8 tugs available up to 1,800 h.p. Two tugs normally used for berthing and unberthing.
BERTHING: Quays operated by Port Authority:

Name	*Length m.*	*Depth m.*	*Use*
Levante	953.14	9.00	Bulk and general cargo
Transversal of Outer Levante	148.00	7.00	General cargo
Transversal of Outer Poniente	205.90	7.00	General cargo
Poniente Quay – Section 1	186.40	9.00	General cargo & bulk
Poniente Quay – Section 2	160.00	11.00	Logs and bulk cargo
Turia Pier, extension North, Section 1.	62.00	9.00	Containers
Turia Pier, extension North, Section 2.	219.00	11.00	Containers
Turia Pier Head	151.00	11.00	Bulk cargo
Turia Pier, extension South, Section 1	166.50	9.00	Bulk cargo, oil products
Turia Pier, extension South, Section 2	219.00	11.00	Bulk cargo, oil products
Turia	402.00	9.14	Wood & oil products
South	600.00	14.00	General cargo & bulk
Inner Levante Transversal	184.60	7.00	General cargo
Customs	387.00	7.00	General cargo
Landing Quay	255.75	7.00	General cargo & passengers
Station	356.00	7.00	General cargo
Nazareth	175.00	7.00	General cargo
Inner Poniente Transversal	212.25	7.00	General cargo

CARGO-HANDLING FACILITIES: Grain, coal, fertilisers, etc., in bulk are handled at Espigon del Turia and Muelle del Turia. Also at Muelle del Turia is a chemical-handling installation, depth alongside 9.25 m.

Containers: Two berths at the Turia pier, North side, with crane of 30 metric tons capacity, also, and using conventional means, they are discharged at the Western quay.

There are 4 work-points for roll-on/roll-off vessels at the Eastern transversal quay and the Western transversal quay.
CRANES: 2 floating cranes, capacity 60 and 80 tons.

The Port Authority operate 54 gantry cranes with capacity of 3 tons to 30 tons. 6 mobile cranes are also available.
TANKERS: *Pipe-lines:* The port areas equipped for oil traffic are connected to the C.A.M.P.S.A. plant by means of a network of 5 pipe-lines, starting at the Turia pier and quay, and ending at the plant itself. These pipe-lines are 1×10 in. diameter with a capacity of 300 cu.m./hr., and another of 8 in. and 250 cu.m./hr. for movement of fuel-oil.

2×8 in. diameter and 250 cu.m./hr. for gas-oil. There are also means of delivery of aviation paraffin by means of 1 pipe-line 6 in. diameter at the rate of 120 cu.m./hr. Also see "Berthing".
MEDICAL: All medical services available in the port and in the city.
REPAIRS: All types of hull and machinery repairs can be effected.
FLOATING DOCK: 1 floating dock available, owned by Union Naval de Levante. Interior length 143 m., interior width 24.60 m. Lifting capacity 8,000 tons.
CUSTOMS ALLOWANCE: Normally Customs permit 200 cigarettes per man out of bond. Additional quantities needed depend on the stay of ship in port. One bottle of spirit per man.
FRESH WATER: Available at all main berths at the rate of 30 t.p.h.
FUEL: Campsa can supply by pipelines at the Turia berths, at the rate of 100–280 t.p.h.
TIME: Always GMT plus 1 hour.
AIRPORT: Valencia Airport, 15 km. from the port.
CONSULS: The following countries are represented in Valencia:

West Germany
Argentina
Belgium
Bolivia
Brazil
Colombia
Costa Rica
Chile
Denmark
Dominican Republic
Ecuador
U.S.A.
El Salvador
Finland
France
Great Britain
Greece
Guatemala
Honduras
Iceland
Italy
Nicaragua
Norway
Netherlands
Panama
Portugal
Sweden
Switzerland
Uruguay
Venezuela
Yugoslavia

POLICE/AMBULANCE/FIRE: Police 091; Fire 271234; Ambulance 230304.
HOLIDAYS: Work can be arranged on following holidays. New Year's Day (January 1st full day); Epiphany (January 6th full day); Saint Joseph (March 19th full day); Easter (two days); Saint Joseph Artisan (May 1st full day); Saint Peter & St. Paul (June 29th full day); Labour Day (July 13th full day); Patron Saint of Spain (July 25th full day); Assumption Day (August 15th full day); Martyrs' Day (August 30th full day); Holiday of Hispanicism (October 12th full day); All Saints (November 1st full day); Christmas Day (December 25th full day).
DEVELOPMENTS: The entrance channel is to be dredged to 15 m. 2×6 ton and 1×30 ton crane under construction. Installation of 6×12 ton cranes in planned.
AUTHORITY: Direccion del Puerto de Valencia.

VIGO: 42.14 N. 08.40 W. (See Plan Book)

DOCUMENTS:
Maritime Declaration of Health.
Crew List.
Passenger List.
Manifest of Cargo for the Port.
Manifest of Cargo in Transit.
Ship's Stores List.
Crew's Personal Effects List.
Ship's Particulars Declaration.

Note: Tobacco. In case the vessel carries more than 3 kilos of tobacco per man, the excess must be declared in a separate manifest, which must be visaed by a Spanish consul. In the absence of the Consul, said document will have to be visaed by an authority of the former port of clearance. Otherwise the vessel would be severely fined.
PILOTAGE: Pilotage at Vigo is compulsory and the service permanent day and night. Pilots board in auxiliary motor-boats with a letter "P" in white at both sides of the hull and a blue flag with the letter "P" in white, near the entrance of the harbour, in the zone included inside Punta Lameda-Cabo Vicos on the channel of the South entrance and inside Punta Caballo-Subrido, on the channel of the North, both situated to the West of the harbour. At night the pilot boats have a white light visible around the horizon and under this light another red one, also visible around the horizon. International code signals used to call Pilot, or four long blasts on the whistle. Pilot station situated at Transatlanticos Pier 3 Pilot boats normally on station on a line connecting Borneira and Transatlanticos Pier.
ANCHORAGE: Several suitable anchorages in the Vigo river, naturally sheltered, in depths of more than 35 m. The main anchorage opposite the port on the South side of the "Ria" has depths of 15–25 m.
MAX. SIZE: No limitation for length and beam, unlimited deep water approaches.
HEALTH: If vessels proceed directly to the berth, pratique can be obtained immediately after berthing. Otherwise, at the anchorage on vessel's arrival. In case of suspected disease or fever on board, the Master must send a radio message to the Agent in order that they advise the Health Office.
RADIO: The nearest Radio Station is Vigo Radio, situated in the limits of Vigo port.
TUGS: No tug-boats are required for entering the port. Only used for berthing ships from 120 m. length upwards according to Pilot's advice. At Vigo there are 2 modern tugs of 1,000 h.p. each. Tugs join vessel off the berth. Tug's line used at no extra charge.
BERTHING: The commercial piers to load or unload have a depth of up to 36 ft. and the Transatlantic Pier, depth of about 40 ft. at LW. The tide difference between high water and low water is about 3.5 m.

At Rande, in the lower harbour, there are very modern special loading installations for mineral ore, at an average rate of 2,000 t.p.h. The depth alongside this installation is 36 ft. LW.

Containers are handled at Muelle de Arenal by cranes of 15 and 20 tons capacity. Depth alongside 11 m.

Roll-on/roll-off traffic berths, depth 6 m., situated inside Transatlantic Pier.
TANKERS: Tankers berth at a pier depth alongside 11 m. at low water. Tankers up to 300 m. length acceptable. Inner berth suitable for vessels of less than 100 m. length with a draft of 6 m. Discharge lines 12 in., 10 in. and two of 8 in. diameter.
STEVEDORES: It is very important that Masters send advance notice regarding the vessel's ETA. With this notice, Agents can inform Shipper's or Receivers' stevedores accordingly, so that they arrange operations properly. The official working hours of the port are Monday/Friday 0830–1230 hrs. – 1400–1800 hrs. Saturday 0830–1230 hrs.
MEDICAL: Doctors and hospital facilities available. Advance notice preferred in urgent cases.
DENSITY: Average 1026.
FRESH WATER: Available from the quays at the rate of 50–80 t.p.h. Can also be supplied by tugs at 500 t.p.h.
FUEL: Available from the Oil Pier or delivered by barge. 24 hours notice of requirements recommended.
DEVELOPMENTS: Bulk carrier berth under construction suitable for vessels up to 300 m. length and 16 m. draft.
GANGWAY/DECK WATCHMEN: Available from shore if required.
OPENING/CLOSING HATCHES: Opening may be done by crew to avoid delays. Closing hatches usually performed by crew.
CUSTOMS ALLOWANCE: 200–250 cigarettes or three kilos of tobacco and 2 bottles spirits may be held out of bond for each person. Wine not restricted.
IDENTIFICATION CARDS: Shore passes are provided by the Agent.
CONSULS: Practically all countries have consulates at Vigo.
REPAIRS: All types of deck and engine repairs are possible.
FLOATING DOCKS: One floating dock available: length 128 m., breadth 22.40 m.
REPATRIATION: Crew changes and repatriation can be arranged without difficulty.
AIRPORT: Local airport, situated 8 kms. from the port, has at least 1 daily flight to Madrid. International airport of Santiago de Compostela is 100 km. away.
TIME: GMT plus 1 hour all the year round.
HOLIDAYS: 1st January; 6th January; 19th March (St. Joseph); Good Thursday afternoon; Good Friday; 28th March (local holiday, Reconquest Day); 1st May (Labour Day); Ascension Day; Corpus

Christi; 29th June (St. Peter and St. Paul); 18th July (National Holiday); 25th July (St James' Day); 15th August; 12th October; 1st November; 25th December.

POLICE/FIRE/AMBULANCE: Police, tel. 21.00.00; Fire, tel. 21.20.00; Ambulance, tel. 21.25.09.

TELEPHONES: No arrangement for connecting on board.

SHORE LEAVE: Allowed without restriction.

DEVELOPMENTS: New transhipment terminal under construction to the North of Bouzas and the West of the fishing port.

AUTHORITY: Director del Puerto, Junta del Puerto y Ria de Vigo.

NOTES

Please also advise Shipping Guides Ltd.

Spanish Sahara

EL AAIUN (Laayoune): 27.04 N. 13.28 W.

LOCATION: Lighthouse at phosphate terminal in position 27° 03′ 55″ N. 13° 27′ 45″ W.

DOCUMENTS: See "Villa Cisneros".

APPROACHES: There is a light located at the end of the bulk phosphate terminal in position 27° 03.9′ N. 13° 27.7′ W. at the top of mineral silos, at a height of 180 ft. 1 flash every 5 seconds, range 10 miles.

There is also a fixed green light located at the Northern part of the terminal, range 10 miles, and a fixed red light at the Southern part of the terminal, range 10 miles.

The phosphate terminal installations give a good radar target at a distance of 25 miles. Vessels approaching from the North should keep 10 miles off the coast until the pier is bearing 090° and then steer towards the pier.

At nights the installation lights are always visible and with a clear atmosphere can be seen from 25 miles off the coast.

PILOTAGE: Compulsory. Pilot boards about 0.75 miles off the pier head.

ANCHORAGES: Good anchorages can be found in 10 fathoms of water. When waiting for the Pilot it is recommended to anchor 0.75 miles Westward of the pier. No shelter in strong winds. Service of powerful auxiliary boats is available when standing at anchor.

MAX. SIZE: Depth 17.5 m. at LWL at the phosphate terminal berth, and 9.5 m. LWS at the berth for general cargo ships, located at the middle of the pier.

HEALTH: Valid smallpox, yellow fever and cholera certificates are required. Otherwise, usual clearance.

RADIO: Via Tenerife Radio on HF, call sign EAT. Via Las Palmas Radio on MF, call sign EAL.

There is no coast radio station in Spanish Sahara for communication with El Aaiun. VHF radio communication is being placed at the phosphate terminal to work in future on Channels 12 and 16.

Ships calling at the terminal are required to send ETA cables 72, 48 and 24 hours prior arrival to "Cargadero Fosbucraa el Aaiun" and "Fosbucraa Madrid".

TUGS: 2,000 h.p. tugs are called from Las Palmas to assist whenever the ship requires their service. Assistance has to be requested by Master or Owner 60 hours prior arrival.

BERTHING: Aaiun Mineral Terminal located approx. 6.5 miles South of El Aaiun City.

The terminal head is in a North-South direction. Vessels are moored alongside dolphins that cover the three loading stations for 100,000, 40,000 and 20,000 tons d.w.t. ships. The loading pier has a height above water of 50 ft. and the dolphins approx. 20 ft.

Facilities consist of modern equipment available for handling phosphate in bulk at a loading rate of 4,000 t.p.h. in 2 of the stations, and 2,000 t.p.h. at the 3rd. The phosphate is loaded by means of moveable loading machines with telescopic spouts to permit perfect trimming.

Facilities at the general cargo berth available for vessels up to 8,000 tons d.w.t. are 2 cranes of 6 tons each, and 1 derrick of 150 tons capacity.

No gangway to be rigged at this terminal. Communication from ship-to-shore is by means of elevator from the loading machines.

AIRPORT: Aaiun (30 km. from harbour).

REPAIRS: No repairs can be effected at this port.

BUNKERS: No bunkers available.

PROVISIONS: Provisions may be obtained if requested by vessel 48 hours prior arrival.

OPERATORS: Fosfatos de Bucraa S.A. (Fosbucraa), Boix y Morer 6, Madrid 3. Cables: "Fosbucraa Madrid". Telex: 27356. Tel.: 2-33-36-00.

VILLA CISNEROS: 23.42 N. 15.55 W.

DOCUMENTS: *Foreign Vessels*

Crew List.
Health Pratique.
Passenger List.
Cargo Manifest.

Spanish Vessels, in addition to the above:

Safety Equipment Certificate.
Radio Safety Certificate.
Seaworthiness Certificate.

PILOTAGE: Pilot is necessary to cross the bar and for river navigation. Pilot joins at anchorage. Pilotage compulsory for all vessels over 50 grt. Contact Pilot by radio-telephone, via Puerto de Villa Cisneros Radio operating on 2182 and 2626 kHz. from 0800 to 1300 hrs. and from 1500 to 2000 hrs. GMT.

ANCHORAGE: In depths of more than 10 m. about 0.6 mile East of the breakwater head. This situation is well protected from swell from the S.W. but open to winds from the N.E. which are frequently strong creating difficult conditions for very small vessels. There are no mooring buoys.

Vessels loading trans-shipment cargo anchor in position with Punta Galera Light bearing 030° T, 1.2 miles off. The prevailing winds blow mostly from the North up to force 3 with a long low swell mostly from a N.W'ly direction.

MAX. SIZE: Length 100 m., beam 12 m., draft 5 m.

HEALTH: Masters are required to complete a health certificate for the Comandancia declaring that the vessel has not called at any infected ports.

TUGS: None available, only one small launch which may assist.

BERTHING: Breakwater of 750 m. length extends towards the S.E., berths alongside the last 200 m., 1 concrete pier for small vessels, 3 small jetties enclosing 2 docks, can be used by vessels of medium size.

STEVEDORES: Employed by Port Authority and engaged by ship's Agent.

MEDICAL: Hospital available for any kind of medical attention; doctors and ambulance service available.

TANKERS: Moor at jetty No. 2. Pipelines 4 in. diameter.

FRESH WATER: On the quays are 3 hydrants, capacity 3 t.p.h. and 4 of 2 t.p.h.

FUEL: Atlas Company can supply fuel subject to advance notice.

OPENING/CLOSING HATCHES: Opened and closed by crew.

CUSTOMS ALLOWANCE: Crew are allowed to take only sufficient tobacco ashore for their own consumption. It is not permitted to take alcohol ashore.

IDENTIFICATION CARDS: Seamen going ashore must taken an identity card or a shore pass, issued by the Master.

CONSULS: No local representation.

REPAIRS: Only facilities for very minor repairs.

REPATRIATION: Can be arranged provided that documentation is in order.

AIRPORTS: Situated 1 km from the port. Iberia Airlines have 5 flights per week. In case of emergency, military aircraft may be used.

TIME: GMT is used all year round.

HOLIDAYS: 1st January; 6th January; Maundy Thursday; Good Friday; Corpus Christi; Ascension Day; 29th June; 16th, 18th and 25th July; 15th August; 12th October; 1st November; 25th December.

Mohammedan Holidays: Aid el Queber (2 days); Aid el Mulud (1 day); Aid el Seguer (2 days).

POLICE/FIRE/AMBULANCE: Police Station situated 100 m. from the quays. Fire: tel. 18. Ambulance: tel. 17.

SHORE LEAVE: Allowed without restriction

AUTHORITY: El Comandante, Militar de Marina.

NOTES

Please also advise Shipping Guides Ltd.

Sri Lanka

COLOMBO: 06.56 N. 79.50 E. (See Plan Book)

DOCUMENTS:

5 each of Crew and Passenger Lists.
8 Manifests.
1 Arrival Report for Pilot.
1 Master's Declaration for Immigration, and same for Police.
2 Private Property Lists of officers and crew for Customs.
2 copies of Preliminary Report by Master for Customs.
1 Maritime Declaration of Health for Port Health Officer.
1 Master's Declaration of Cargo for Quarantine Department.

PILOTAGE: Vessels approaching port apply for Pilot by flying the G flag by day or 2 red lights at night. They can, in addition, flash the Pilot station or use VHF Channel 16. The telegraphic address of Pilot station is "Pilot Station Port Commission Colombo" and a provisional ETA 24 hours ahead is advisable with corrections thereafter. However, these are best channelled through the vessel's Agent. Pilot boat is a wooden motor launch with the word "Pilot" on its side. It flies the H flag by day or red and white lights by night according to the international code. The Pilot boards within an area of about 1 mile of the harbour entrance. Advice of where to anchor can be obtained from the Pilot by VHF or signal light.

ANCHORAGES: The usual anchorage off port is within 3 miles of the harbour mouth where up to 14 fathoms of water is available. 18 fathoms of water is available within 6 miles.

RESTRICTIONS: Entry may take place at all hours of the day and night but it is unusual for the Pilot to board vessel between midnight and 0400 hrs.

MAX. SIZE: For entering harbour, max. draft 36 ft. and a length of 800 ft. is permissible. Beam is not critical. There is no appreciable rise and fall of tide.

Tankers' max. dimensions for berthing alongside: length 750 ft., draft 34 ft.

HEALTH: The vessel entering port must fly the "Q" flag until boarded by the Port Health Officer to grant pratique. Pratique may be granted by radio if there is a doctor on board provided the ship is not calling from a port in India. A radio message should be sent within 24 hours of the vessel's ETA in the following terms "Last port — no quarantinable disease on board – Doctor on board" and the Port Health Officer will reply to the Agent confirming pratique being granted by radio. Pratique is automatic if the vessel enters after calling at another port in Sri Lanka. If any quarantinable disease on board double "Q" flags must be hoisted prior to entering harbour.

RADIO: "Colombo Radio" with a call sign 4PB is the usual channel for communicating with Colombo.

The pilot station is presently available on VHF Channel 16 and the Port (Cargo) Corporation on VHF Channel 11.

TUGS: Tugs normally join the vessel at the harbour mouth and use ship's lines.

BERTHING: There are no specific requirements relating to berthing space but early advice of draft is most advisable.

STEVEDORES: The stevedores at Colombo are the Port (Cargo) Corporation, a nationalised concern having the monopoly of stevedoring and lighterage. ETA at least 24 hours in advance if possible. Gangs for the day shift which commences at 0730 hrs. must be ordered by 0700 hrs. and gangs for the evening shift, commencing at 1630 hrs., by 1600 hrs. This excludes the Poya Day on which only the day shift is worked, and gangs must be ordered by 0930 hrs. on the previous day.

MEDICAL: Although advance notice of medical assistance required is helpful, particularly when port stay is limited, it is not essential. Comprehensive hospital facilities are available either in private nursing homes or the Government hospitals. The following inoculations are required: Smallpox and cholera, yellow fever if calling from ports in East Africa and Mozambique.

TANKERS: There are 3 tanker berths, 1 for importing crude oil suitable for tankers of 750 ft. length, max. draft 34 ft. One berth for white oil tankers with max. draft 33 ft. One berth for fuel oil imports for vessels with a max. draft of 31 ft., and this same berth is used for exports when permissible draft is 33 ft.

The diameter of discharge lines;
Crude oil, 24 in., giving capacity 1,000 t.p.h.
White oil, 10 in., capacity 250 t.p.h.
Gasoline, 10 in., capacity 170 t.p.h.
Furnace oil, 14 in., capacity 500 t.p.h.
Naphtha, 12.75 in., capacity 450 t.p.h.

Pumping will not be commenced after nightfall. No residue discharge facilities are available.

DENSITY: 1025.

FRESH WATER: Fresh water is readily available by barge. The rate of delivery is approx. 40 t.p.h. The water is of good quality.

FUEL: Furnace diesel and gas oil available. Advance notice of at least 24 hours is advisable as the bunker requirements of the port often exceed the ability of the oil companies to supply immediately. Supplies are by barges which can pump at 300 t.p.h.

DEVELOPMENTS: One new alongside dry-cargo berth with a draft of 37 ft.

GANGWAY/DECK WATCHMEN: Watchmen are available and are to be recommended unless members of the crew are available to provide this service.

OPENING/CLOSING HATCHES: This work is normally carried out by the stevedores except in the case of McGregor or similar hatch covers which they will not handle.

CERTIFICATES: Register showing vessels name, port of registry, gross and net tonnages and owner. Safety Equipment Certificates quadrennial and annual, Ship's Articles (British) and clearance from previous port and deratisation Certificate.

CUSTOMS ALLOWANCE: Cigarettes 25 per man per day. Tobacco 1 oz. per man per day. Snuff 1 oz. per man per day. Spirits 0.25 bottle per man per day. Wine 1 bottle per man per day. Beer 2 bottles per man per day.

IDENTIFICATION CARDS: These are not essential but the crew is expected to carry some form of identification with a photograph on it when they leave the vessel.

CONSULS:

Belgium
Burma
China
Czechoslovakia
Denmark
Egypt
France
Germany
Greece
Indonesia
Italy
Japan
Maldives
Netherlands
Philippines
Poland
Rumania
Thailand
Switzerland
U.S.A.
U.S.S.R.
Yugoslavia

REPAIRS: Most main engine and boiler repairs and minor hull repairs can be effected.

DRY DOCKS: No. 1 – 700 ft.×85 ft.×32 ft. over blocks – Max. size 675 ft. LOA, 80 ft. breadth – Deepest draft 29 ft.
No. 2 – 350 ft.×54 ft.×22 ft. over blocks.
No. 3 – 400 ft.×54 ft.×18 ft. over blocks.
Owners and Operators – Colombo Dockyard Limited.

A dry dock of 65,000 d.w.t. complete with workshop facilities is planned for operation by late 1981.

REPATRIATION: There is no difficulty in arranging repatriation and crew change.

AIRPORT: It is 18 miles to the international airport which is served by regular airlines.

TIME: Sri Lanka standard time is 5.5 hours in advance of GMT, and no alterations are made during the year.

HOLIDAYS: Cargo work can normally be arranged on all except the following holidays:

1st January; Sinhalese & Tamil New Year 1 day in April; 1st May; Wesak Full Moon in May; Republic Day 22nd May; 26th September; Christmas Day.

POLICE/AMBULANCE/FIRE: Harbour Police tel. 21075; Ambulance 20428; Ambulance launch: Exhibit "A.L." flags; Port Fire Brigade 32331.

TELEPHONES: None are available for placing on board.

GENERAL: Ships should not discharge oil within territorial waters, dispose any waste into harbour or on to quays, immobilise main engines without prior permission, use radio for transmission in harbour. Ships should hoist national flag during daylight hours.

SHORE LEAVE: There is no restriction on crew members being allowed ashore but advised to carry passport or other identification.

DELAYS: Delays for vessels working cargo are seldom over 24 hours. However, it is very unusual for vessels calling for bunkers, fresh water, stores, etc., to be delayed for more than a few hours.

AUTHORITY: Colombo Port Commission.

GALLE: 06.01 N. 80.14 E.

PORT LIMITS: To the Eastward Unawatuna Point, to the Westward Gindurah Point, to the Southward the usual sea league from the line between these points.

DOCUMENTS: Pilot brings on board:

Arrival Report and Maritime Declaration of Health.

Port Health Officer boards vessel after berthing and collects Crew List, Passenger List, Maritime Declaration of Health. Examines crew, passengers and International Certificates of Vaccination.

Customs. Manifests, Bonded List, Passenger List, Cargo List, List of Currency, Port Declaration.

Immigration. 3 Crew Lists.

PILOTAGE: Apply for Pilots via local Agents. Send ETA not more than 24 hours prior arrival via Colombo Radio. Vessels telegraph direct to Master Attendant, Galle, via Colombo Radio. Vessels advised listen-in on Channel 16, VHF.

Pilot launch about 60 ft. long with white hull carrying word "Pilot". Pilot launch proceeds to vessels from Master Attendant's Office and Pilot will board about 0.25 mile to South of bell buoy. Vessels should anchor until pilot launch arrives and heave-up on approach of pilot launch; due to heavy swell prevalent *essential* vessels provide good lee for Pilot. Proper pilot ladder and two man ropes should be ready. Vessels anchoring should do so to the South or East of bell buoy. See "Anchorages".

ANCHORAGES: Best anchorage lies to Eastward of bell buoy where depth 9 fathoms. To Southward of bell buoy depth increases to 15 fathoms. Vessels should anchor about 0.5 mile from bell buoy.

RESTRICTIONS: Vessels should not proceed North of bell buoy. Entry prohibited after 1700 hrs. and may be delayed by bad weather. Generally a wind force of over 25 knots and a swell of over 4 ft. delays entry.

MAX. SIZE: N.E. Monsoon. 1 vessel of 500 ft. up to 30 ft. draft, 2 vessels of 500 ft. up to 26 ft. draft, 1 vessel of 450 ft. up to 23 ft. draft, 1 vessel of 350 ft. up to 20 ft. draft can be berthed at stream berths. S.W. Monsoon. 1 vessel of 475 ft. up to 25 ft. draft, 1 vessel of 450 ft. up to 21 ft. draft. 1 vessel of 350 ft., up to 18 ft. draft can be berthed at stream berths.

Two alongside berths available for vessels up to 350 ft. length and 18 ft. draft. 750 ft. of quay space available.

HEALTH: The International Declaration of Health, handed to Master by Pilot, must be completed and returned to Port Health Officer, who boards after berthing. PHO also requires 2 Crew Lists, synopsis of Vaccination Certificates, Deratisation Certificate and examines Certificate of Vaccination.
RADIO: Colombo Radio.
TUGS: At present only 1 tug of 250 h.p. available throughout year. If sufficient notice given (over 24 hours) an additional tug could be sent from Colombo (only available during N.E. Monsoon). Tug meets vessel at berth, tugs lines used. Charges for tugs included in port (pilotage) charges irrespective of ownership of towing lines.
BERTHING: Vessel berthing in stream lies to both anchors and picks up 4 to 6 mooring lines from buoys aft. To pick up mooring lines, vessel should have ready at stream 2 messenger wires of 2.5 in. diameter and 60 fathoms length.
STEVEDORES: All stevedoring carried out by Government Corporation. Gangs, lighters etc. are all arranged by Port (Cargo) Corporation. 16 lighters of approx. 15 d.w.t. capacity available for working vessels in stream berths.
MEDICAL: Vessels arriving in Galle and requiring medical attention should cable Agent and Port Health–Galle at least 12 hours in advance.
DENSITY: 1025.
FRESH WATER: In cases of emergency up to 20 tons fresh water could be supplied daily in stream in 400 gallon tanks conveyed by lighters. Alongside main quay up to 50 tons per night could be supplied by Bowser.
FUEL: Bunkering Division of Ceylon Petroleum Corporation, Kolonnawa (off Colombo) can service vessels with small quantities of fuel. 5 days prior notice required.
DEVELOPMENTS: Building of breakwater and all dredging operations stopped indefinitely.

Dredging main quay to 30 ft. deep, and channels to 33 ft. depth.
GANGWAY/DECK WATCHMEN: Ceylon police station 2 policemen aboard every vessel in harbour. For vessels berthed alongside policemen stationed aboard through day. For stream vessels policemen stationed only during hours when cargo worked.
OPENING/CLOSING HATCHES: Shore labour, but there is no objection to hatches being opened prior to labour boarding.
CUSTOMS ALLOWANCE: Present allowance 200 cigarettes per week, 2 bottles beer per day. Others proportionately.
CONSULS: All consular officers in Colombo, 72 miles away, 2 hours by train, 2.5 hours by road.
REPAIRS: No repairs possible as Galle open to S.W., essential that vessels have engines ready at all times. No shutdown permitted.
REPATRIATION: Sub-collector of Customs acts as Shipping Master and will sign on/off properly authorised crew changes.
AIRPORT: Colombo.
TIME: Standard Time GMT plus 5.5 hours.
HOLIDAYS: Non-working days in the port (dates variable yearly): Sinhala and Tamil New Year in April; Good Friday, 1st May; Wesak Full Moon in May; 22nd May; 26th September; Christmas Day.
POLICE/FIRE/AMBULANCE: Harbour Police 3222; Ambulance 2261. No fire brigade available.
TELEPHONES: No telephones available aboard.
SHORE LEAVE: Crew allowed ashore.
AUTHORITY: Master Attendant, Master Attendant's Office.

TRINCOMALEE: 08.36 N. 81.15 E.

DOCUMENTS:

International Maritime Declaration of Health.
6 copies Crew List.
6 copies Passenger List.
Smallpox Vaccination Certificates are compulsory.
Cholera or Yellow Fever Certificates required if vessel is arriving from an infected port.

PILOTAGE: Call Pilot on VHF Channel 16, also send ETA via Colombo Radio to Pilot Station. Vessels should indicate ETA through Colombo Radio, either to Agent or direct to Deputy Master Attendant, Trincomalee, at least 24 hours before arrival. No night pilotage. Pilot boards incoming vessels between hours of 0600 and 1800 hrs. about 2 cables Northward of Round Island (8° 30′ 48″ N. 81° 13′ 24″ E.). Vessels embarking Pilot should whenever possible lower an accommodation ladder; if this is not practicable should let down a pilot ladder and provide 2 man ropes not less than 3 inches in circumference. Vessels awaiting a Pilot should anchor 0.5 miles N.E. of Round Island light tower in depths from 11 to 13 fathoms.

Vessels arriving between 1800–2100 hrs. may be brought in at Deputy Master Attendants discretion if they come to anchorage 5 cables N.E. of Round Island.
ANCHORAGES: Trincomalee Harbour is the only entirely sheltered natural harbour in Sri Lanka. Good anchorage may be found in almost any part of harbour in good weather.
RESTRICTIONS: Vessels may enter during hours of daylight only. Range of tide is very small and does not restrict entry.
MAX. SIZE: Almost unlimited length and draft can be accommodated in anchorage. Only 1 berth which can accommodate up to 600 ft. length, and 36 ft. draft. This jetty used for discharging tankers and bunkering.
HEALTH: The Port Health Officer boards vessels after arrival at anchorage to grant pratique. Pratique automatic for vessels arriving from another port in Sri Lanka.
RADIO: All cables to Deputy Master Attendant, Agents, Receivers, etc., should be routed through Colombo Radio; call sign 4 PB.

Pilot carries a portable VHF set, Channel 16, with about 2 miles range.
TUGS: One tug attends when required. Tow-lines generally not used; but if required tug/ship's lines used.
STEVEDORES: Stevedoring operations have been nationalised and are carried out by the Port (Cargo) Corporation, Trincomalee.
TANKERS: One tanker berth at which vessels of 600 ft. length and 36 ft. draft are discharged.
DENSITY: Salt water.
FRESH WATER: Available, supplied by water lighters and from bunkering jetty.
FUEL: Marine heavy diesel and furnace oil can be supplied at 24 hours notice.
GANGWAY/DECK WATCHMEN: Watchmen are provided by the Port Tally and Security Services Corporation.
OPENING/CLOSING HATCHES: Carried out by stevedores.
CUSTOMS ALLOWANCE: Tobacco issued as required. Wine and/or Spirit issued as required.
IDENTIFICATION CARDS: Identity Cards or Passports are required to be carried by crew members ashore.
CONSULS: All Consular officers are in Colombo.
REPAIRS: Only minor repairs can be carried out.
REPATRIATION: Crew changes and repatriation can be effected.
AIRPORT: No International flights through Trincomalee. Internal service of Air Ceylon operates daily flights between Trincomalee and Colombo.
TIME: GMT plus 5.5 hours.
HOLIDAYS: Dates of holidays are not fixed. Cargo work can generally be arranged on any holiday.
TELEPHONES: Police 308; Ambulance 448; Fire 335. There are no telephone connections for ships.
SHORE LEAVE: Allowed.
AUTHORITY: Master Attendant, Port Commission.

NOTES

Please also advise Shipping Guides Ltd.

Sudan

PORT SUDAN: 19.37 N. 37.14 E.

DOCUMENTS:

Port Sudan Harbour Master's Declaration.
Sudan Customs Declaration.
Quarantine Form.
(All above forms to be filled by Master on arrival).
3 Crew Lists.
3 Passengers Lists.
1 Crew Declaration.
1 Dutiable Stores.
4 copies Manifest.
1 copy B/Lading.
1 Provisions List.

PILOTAGE: 24 hours notice ETA. VHF. Channel 16. Pilot boards South of South Wingate Beacon. Pilotage compulsory.

ANCHORAGES: Towartit Anchorage, approx. 8 km. S.E. of harbour.

RESTRICTIONS: No restrictions providing berth available.

MAX. SIZE: Length 850 ft. Max. draft at Oil Terminal 37 ft., other berths between 28 ft. and 34 ft. 6 in.

HEALTH: Radio pratique obtainable if message sent not more than 24 and not less than 8 hours before arrival to "Quarantine, Port Sudan", with following information: Name of ship and ETA; Name of Agent; Whether surgeon carried or not; Whether illness on board, if so, what illness; Port of departure and last port of call. On receipt the Quarantine Medical Officer will inform ship by wireless whether pratique is granted or not.

RADIO: Port Sudan Radio (call sign STP). Operates daily on High Frequency as follows: 8652 Mcs from 0400 hrs. to 1600 hrs. GMT; 4356 Mcs from 1600 hrs to 0400 hrs. GMT; 500 kcs – continuous listening watch for first 10 minutes of every hour. Radiograms may be handed in at Port Sudan Post Office at all times and at Port Sudan Quays Post Office during office hours.

TUGS: About 1 mile from harbour entrance. Either ship's or tug's lines at Pilot's discretion.

BERTHING:

Berth	*Length*	*Depth*	
		Winter	*Summer*
Nos. 1 to 5 main berths	458 ft.	30 ft.	28/33 ft.
No. 5A	426 ft.	35 ft.	33 ft.
Nos. 6 & 7	606 ft.	35 ft.	33 ft.
Nos. 8 & 9	600 ft.	37 ft.	35 ft.
No. 15	642 ft.	37 ft.	36 ft.
No. 16	230 ft.	37 ft.	35 ft.
Nos. 17 & 18	908 ft.	39 ft.	37.5 ft.

CARGO HANDLING: Grain silo of 50,000 tons capacity situated at Berth No. 15. Heaviest lift normally acceptable is 15 tons; special arrangements necessary for heavier items.

Span of coal transporters is 420 ft.

TANKERS: At berth No. 16, vessels up to 600 ft. length can berth with overhang. Max. draft 34 ft. 6 in.

Berths 17 and 18 accommodate tankers up to 37 ft. draft. Berths connected by pipe-line to refinery 8 km. South of Port Sudan.

Used for discharging crude oil and loading refined products.

STEVEDORES: Require 24/48 hours advance notice of ETA and stowage of cargo. Rate of Discharge and Loading: General cargo, 5–10 tons per hook per hour. Bagged cargo, 15–20 tons per hook per hour.

Exports. Main exports, cotton, cottonseed, gum Arabic, oilcakes, MOP shells, trocas shells, senna, beans, domnuts, oilseed, hides, skins, salt, beeswax, durra, wheat bran, chick peas, karkadeh, ground nuts, livestock, castor seed and edible oil.

Tea. Following exports should not be stowed with tea: castorseed, hides, linseed, edible oil, oilcake. Cottonseed may be stowed with tea with separation of 3 ft. but it is preferable to stow in separate compartment from tea.

Cotton. Gum should never be stowed with cotton.

Transhipment cargo. Is normally not accepted at Port Sudan without prior permission, except in very small quantities.

Weight. Deadweight of cargo is expressed per ton of 1,000 kilos.

MEDICAL: Advance notice advisable. Hospital facilities available. Crew and passengers must have International Health books valid.

DENSITY: 1025.

FRESH WATER: Available ex quay and ex barge.

FUEL: Marine Fuel oil (normally 1000 secs.); marine diesel oil (42/45 secs.); gas oil (35 secs.). 24/48 hours advance notice advisable. Name of suppliers is required.

GANGWAY/DECK WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: Normally by stevedores.

CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes per person. Wine and/or Spirit, 2 bottles of different kinds per person. Only personal requirements may be taken ashore.

IDENTIFICATION CARDS: Not required.

CONSULS: A.R.E. (Egypt) and Nigeria.

REPAIRS: Minor deck and engine repairs.

DRY DOCKS: Slipways for 2 vessels up to 500 tons capacity.

REPATRIATION: Not recommended. Formalities take 2/3 days.

AIRPORT: 3 miles away. Flights twice per day Port Sudan to Khartoum. 2 flights per week Port Sudan to Cairo from June 1st, 1978.

TIME: GMT plus 2 hours. In Summer, GMT plus 3 hours.

HOLIDAYS: The following government holidays for the year 1978 will be considered as port holidays. (The dates may vary in other years) January 1st (Independence Day – 1 day), February 19th (Mulid El Nabi – 1 day), March 3rd (National Unity – day), May 1st (Sham el Nassem – 1 day), May 25th (Revolution Day 1 day), September 3rd-6th (Ramadan Bairam), November 10th-14th (Kurban Bairam), December 1st (Mohammedan New Year 1 day), December 25th (Christmas Day).

The port will not work on the following days: January 1st (Independence Day), November 10th–14th (First Day Kurban Bairam), December 1st (Mohammedan New Year), February 19th (Mulid El Nabi) May 25th (Revolution Day), September 3rd (First Day of Ramadan Bairam), December 25th (Christmas Day). Overtime will be worked on all other days.

POLICE/AMBULANCE/FIRE: Police 4888; Ambulance 2400; Fire 5922.

TELEPHONES: No arrangements exist for placing telephones on board.

GENERAL: No foreign currency allowed ashore. Crew are permitted to go ashore with any amount Sudanese Currency.

AUTHORITY: Managing Director's Office, Sea Port Corporation.

AGENT: May Trading and Services Co., PO Box 17, Port Sudan. Telegraphic address: "Mayo" Portsudan. Telex: No. 6. Tel. (during office hours) 2437; 2029, 2389; after office hours 2652, 2040.

NOTES

Please also advise Shipping Guides Ltd.

Suriname

MOENGO: 05.38 N. 54.25 W.

A bauxite mining town about 70 miles up the Cottica river, a tributary of the Commewijne river, which latter joins the Suriname river at Fort Nieuw Amsterdam.

DOCUMENTS/PILOTAGE/GENERAL INFORMATION: refer to "Paramaribo."

TUGS: Two tugs are available, the larger is 1,750 h.p.

MAX. SIZE: Ships of 525 ft. can be accommodated. Ore vessels call daily. Draft depends on bar draft Suriname river.

BERTHING: Moengo has two piers at which ore is loaded by a transporter at the rate of 800/1,000 t.p.h. One pier is 430 ft. long and has a depth of 24 ft. alongside. Both will accommodate ships of 525 ft. length. Tracks are laid on the 430 ft. pier and a 25 ton crane is available.

PROVISIONS: Not available.

FUEL: Small quantities can be supplied.

FRESH WATER: Small quantities can be supplied.

AIRPORT: About 5 km. from docks.

AUTHORITY: District Commissioner acts as Harbour Master.

AGENT: Alcoa Shipping Co.

NEW NICKERIE: 05.57 N. 56.59 W.

DOCUMENTS:

2 copies Crew List.
2 copies Passenger List.
Customs Documents; Crew Declaration Lists; for instance, souvenirs, electric apparatus, etc.
2 copies Ship's Store Lists.
3 copies Manifests of Import.
3 copies Manifests of Export.
copy Transit Manifest.
2 copies Manifests of Coastal Cargo.
Ship's Papers to be shown on request.

PILOTAGE: Pilotage is compulsory for the Nickerie River for ships bigger than 50 gross tons. There is always a pilot available; ETA to be sent 48 hours before arrival and 12 hours before arrival give necessary correction message to the Agent.

Ships can only enter the river at or about the time of high water.

The Pilot boards near the sea buoy (buoy No. 1). The pilot boat is a small wooden, grey and white painted vessel. The Pilot boat does not use the international red-white pilot lights at night. It is possible to make radio telephone contact with the boat (Pilot carries a walkie-talkie VHF equipped with Channel 12). There is a signal lamp on board.

Send ETA-message to Agent who will order the Pilot. Awaiting high water the vessel can anchor about 3 miles N.N.E. of the sea buoy.

ANCHORAGES: With a draft of 15 ft. the ship can safely anchor 3 miles N.N.E. of the sea buoy. It is not advisable to anchor in the Nickerie river for a long time, the river is too narrow.

MAX. SIZE: With springtide the max. draft must not exceed 14 ft. 9 in. and at neaptide 12 ft. The vessel has to use the high-inlet while passing the bar.

Max. permissible length of vessel is 130 m. (426 ft.). At low water ships are seated in the mud without consequence to hull, rudder or propeller alongside the wharf. There are berths for oil-carriers.

HEALTH: There is no pratique-procedure. Only in the event of any suspected disease or fever on board a doctor must be called.

RADIO: Send ETA cables to Paramaribo Radio. The pilot office at Nickerie has a radio telephone transmitter. Frequency 8233.9 kHz; listening hours 0700, 1200, 1800 hrs. local time. SSB and VHF equipment also used.

TUGS: No strong tugs available.

STEVEDORES: The Agent orders the gangs (maximum 3 gangs available).

MEDICAL: No advance notice required for medical treatment. There is 1 hospital in Nickerie with a surgeon.

TANKERS: There are 3 piers in Nickerie: Esso, Shell and Texaco pier. Maximum permitted draft 14 ft. 9 in. at springtide.

DENSITY: In the dry season the density on the river near New-Nickerie is 1015. In the rainy-season the density is 1005 near HW, and 100 near LW. These all depend upon springtide or neaptide.

FRESH WATER: Fresh water is available alongside the wharf of New-Nickerie. It is loaded from shore by hose.

FUEL: Small quantities of fuel available from Esso or Shell, also grease and petrol.

DEVELOPMENTS: In the future a bigger and deeper port will be built in the Corentyne river, about 20 miles up the river.

GANGWAY/DECK WATCHMEN: It is recommended to have a watchman during the night.

OPENING/CLOSING HATCHES: Patent hatches must be opened by the crew, other hatches by the stevedores.

CUSTOMS ALLOWANCE: Captain included: for every 72 hours staying in port: 15 cigars or 60 cigarettes or 30 cigarillos or 150 gm. tobacco plus 0.25 bottle spirits or 5 bottles beer or 1 bottle wine.

IDENTIFICATION CARDS: Not needed.

CONSULS: No consuls in Nickerie.

REPAIRS: Small engine repairs and shaft repairs and some welding repairs can be done.

REPATRIATION: Is possible via Paramaribo.

AIRPORT: The airport is 10 miles from the port of Nickerie. 2 times per day there is a flight to Paramaribo arranged by a local company, called S.L.M.

Daily bus service between New Nickerie and Paramaribo.

TIME: Local time is GMT minus 3.5 hours. No alteration in time.

HOLIDAYS: New Year's Day; Good Friday; Phagwa; Queen's Birthday (April 30); Ascension Day; Labour Day (May 1st); Day of Liberties (July 1st); Idul Fitre; Christmas Day and Boxing Day. On these days work can be done by paying overtime.

POLICE/AMBULANCE/FIRE: Police 356; Ambulance 241; Fire 333.

TELEPHONES: No arrangements can be made for a telephone connection on board.

SHORE LEAVE: Without reserve.

DELAYS: Delays in berthing: there are only 2 wharves with a total length of 700 ft. Banana ships have priority. Delays in loading and discharging: there are only 3 gangs of stevedores. These can be enlarged to 5 "small gangs".

AUTHORITY: District Commissioner acts as Harbour Master.

PARAMARIBO: 05.49 N. 55.09 W.

PORT LIMITS: The seaward boundaries of the port, within which a vessel is considered to be "arrived" is the entrance of the Suriname, Matowijne, Coppename, Corantijn and Nickerie rivers. Laytime commences to count after vessel has anchored or berthed. On the left bank of the Suriname river about 8 miles above New Amsterdam and 21 miles from light-vessel at river entrance.

DOCUMENTS:

5 Incoming Cargo Manifests (if any cargo), otherwise 3 copies.
1 Cargo Transit Manifest.
4 Outward-going Manifests.

These above-mentioned must be sent ahead to the Agent so that they can be translated into Dutch.

4 Crew Lists.
2 Store Lists.
2 Crew Declaration Lists.
6 Passenger Lists.

PILOTAGE: Compulsory. All ships are requested to amend their estimated time of arrival in local time, at least 12 hours in advance by special message through the wireless station to their Agents or to the Harbour Master. Arrival message should include draft of vessel and other requirements. 6 hours prior to arrival the ETA has to be confirmed and if necessary corrected. The Pilot will be dispatched after receiving the confirmed ETA. As there is no shipping but in the Suriname river, the Commenwijned river, the Cottica river and the Nickerie river, all Pilots except one for Nickerie are stationed at Paramaribo. Paramaribo Pilots board the vessels at the light-vessel of the Suriname river. All vessels have to stop off the light-vessel.

ANCHORAGE: Anchorage off town in 18–35 ft. of water at LWS. Government officials board vessels immediately on arrival for inward clearance. Vessels which are required to anchor off the port to wait for berths may be boarded at the anchorage.

RESTRICTIONS: Bar has min. depth of 14 ft. 5 in. Rise neap tide 6 ft. 7 in. spring tide 8 ft. 10 in. Due to the fact that the bar consists of mud, vessels regularly leave the port with drafts between 22 and 23 ft.

RADIO: There is a 24 hours radio telephone service at the Harbour Department on SSB and VHF. The coast station, PZN, also maintains a 24-hour radio telegraph (500 kc.) and telephone service in the 2182 kc. band. The lightvessel *Surinam River* is equipped with VHF Channel 12.

VHF: Harbour office on Channel 12, 24 hours a day. Radio Station "PZN" on Channel 16, 24 hours a day.

HEALTH: Port doctor will visit an arriving ship only if there is a case of contagious disease aboard, or if one of the preceding ports of call has been declared to harbour contagious disease. No bill of health is required. A ship with an infection on board must advise the Harbour Master by special message through the wireless station before arrival.

BERTHING: *O.G.E.M. wharf*, 120 ft. long least depth 18 ft. Oil/gas discharge for public undertakings.

B.E.M. wharf, 110 ft. long, least depth 18 ft. Private cement and gravel discharge wharf, Moorings 450 ft. apart.

Banana export pier, 297 ft. long, least depth 18 ft. Fresh water can be supplied.

New Oil terminal, Moorings 570 ft. apart. Least depth 18 ft.

Flour pier, 36 ft. long. Moorings 160 ft. apart. Least depth 16 ft. Only possible to discharge flour with a grain elevator.

Vensur Cement wharf, 180 ft. long, least depth 14 ft. Moorings 600 ft. apart.

New Wharf Ltd., 1,815 ft. long. Least depth 19 ft. at LWS. Fresh water can be supplied.

Belwaarde: 3 miles above Fort Nieuw Amsterdam on the right bank of the Suriname river. Length of pier: 279 ft., least depth 18–20 ft. Loading sugar.

Shell Oil Terminal: Moorings 540 ft. apart. Least depth at LWS 21 ft. exclusively for oil and gas.

MEDICAL: Excellent medical and dental attention is available to Crew members of all vessels.

FRESH WATER: The water is of excellent quality. Available at most berths as mentioned above.

FUEL: Ship's bunkers are available in most ports of Suriname in limited quantities. Advice regarding quantities and specifications of oil should be given to Agent's representative immediately after docking.

CUSTOMS ALLOWANCE: 60 cigarettes or 15 cigars or 0.5 lb. of tobacco. One-fifth litre of spirits, one-third litre of wine, 2 litres of beer, for each Crew member. All quantities in excess of the above, will be put under seal.

REPAIRS: No facilities for major ship repairs. Local workshops can do repairs of minor nature. There are 2 floating dry docks and 1 floating derrick owned and operated by the Suriname Drydock Co. Lifting capacities dry docks: 400–650 tons.

GANGWAY/DECK WATCHMEN: The customs board the vessel while riding at anchor or alongside one of the docks. All vessels are required to make a proper gangway available to the custom boarding officer.

The local authorities assign one or more custom guards to each vessel during its stay in port. The charges for guarding are for the account of the vessel. These officials must be provided with meals on board at regular meal hours, and rooms if necessary.

REPATRIATION: Under special circumstances vessels may sail without all crew members on board (sickness, etc.). The Master furnishes a letter to his Agent authorising him to accept responsibility for the missing seaman or seamen.

CONSULS:

U.S.A.
Britain
Norway
Venezuela
Brazil
Guyana
Belgium
Denmark
Dominican Republic
West Germany
Indonesia
Ecuador
France
Austria
Portugal
Sweden

TIME: Local time is 3.5 hours slow of GMT. Vessels are required to use local time in ETA messages and when dealing with Agents.

HOLIDAYS: 1st January; Good Friday; Easter Sunday; Queen's Birthday (April 30th); 1st May; 1st July (Freedom Day); 25th and 26th December; Holy Pagwha and Idul Fitre.

SHORE LEAVE: Under normal circumstances no restrictions are imposed by the Government Immigration Authorities on shore leave.

GENERAL: While alongside vessels must maintain engines and propulsion machinery in readiness to leave the pier under full power on short notice. No repairs are permitted which should interfere with this requirement. While alongside, oil tankers should have their offshore anchor out about 50 ft.

All vessels except ships of war, must furnish a statement, of the amount and character of explosives carried, also a certificate to show how they are stored and manner of packing.

Special anchorage areas are provided in the harbour for vessels with dangerous cargo.

All firearms and ammunition must be manifested on store lists and must remain in bond on board during vessel's entire stay in territorial waters of Suriname. Any violation of this regulation renders the vessel subject to fines and confiscation of firearms and ammunition.

BALLAST: Vessels must arrive with sufficient ballast to permit safe handling. All vessels should enter port with clean ballast water that may be pumped overboard while in the harbour, as it is prohibited to pump dirty ballast water or oil residue or sweepings into the harbour.

AUTHORITY: Harbour Master.

PARANAM: 05.38 N. 55.05 W.

Located on left bank of the Suriname River about 40 miles from the entrance, consisting of bauxite mining, alumina refining and an aluminium smelter with facilities for shipping these commodities.

DOCUMENTS/PILOTAGE: and all General Information refer to "Paramaribo."

MAX. SIZE: Vessels up to 40,000 d.w.t. load to outer bar draft (approximately half load) and usually top off at Trinidad.

HEALTH: Health officer does not board unless there are quarantinable diseases aboard.

TUGS: Not generally available.

BERTHING: *General Dock:* Concrete pier of about 350 ft. mooring, 660 ft. apart. Least depth 30 ft. This dock used for loading bauxite or aluminium ingot and for discharging general cargo, oils, caustic and other raw materials,

Alumina Pier: Least depth 30 ft. length 680 ft. Used for loading alumina or discharging oils and caustic.

Equipment: 75 ton Gantry Crane on rails at General Dock.

Loading Capacity: Bauxite at General Dock: 800 t.p.h.
Alumina at Alumina Dock: 850 t.p.h. Loading by conveyor spout trimmed (Telescopic chute).

FUEL: Small quantities of light diesel No. 2 only in emergency.

FRESH WATER: Can be supplied.

REPAIRS: None can be effected.

AIRPORT: At Zanderij, 45 km. from dock.

AUTHORITY: District Commissioner officially acts as Harbourmaster but vessel movements, pilotage, etc. handled by Paramaribo Harbour Master's Office.

SMALKALDEN: 05.38 N. 55.05 W.

A bauxite mining town on the left bank of the Suriname river about 20 miles upstream from Paramaribo.

DOCUMENTS/PILOTAGE: and all General information; refer to "Paramaribo".

TUGS: None available.

BERTHING: Wharf with length of 218 ft. Moorings, 535 ft. apart, least depth 30 ft. Ships can load to outer bar draft. Bauxite loaded by two conveyors with an average of 800 t.p.h.

DEVELOPMENTS: New wharf under construction capable of handling ore ships up to 40,000 d.w.t. Moorings 680 ft. apart.

FUEL: None available.

FRESH WATER: Small quantitites can be delivered by trucks.

REPAIRS: None.

AIRPORT: At Zanderij, 45 km. from dock.

SHIPMASTER'S REPORT: 1978

Documents: Two crew lists, two stores lists and two crew declaration lists.

Customs: Customs board at Smalkalden on arrival and clear vessel. They do not remain on board.

Pilotage: Available and compulsory. Pilot station at Paramaribo.

Anchorage: Safe anchorage available four miles North of the sea buoy, depth of water about 30 ft., nature of bottom, mud.

Approaches: Inwards: There is a direction finding station at Paramaribo. Light vessel not on station. The buoy channel is almost non-existant as some buoys have disappeared and have not been replaced. The light buoys are extremely poor.

On entering the river, it was noticed that the propeller stirred up dense mud. The main engine cooling filters became choked even though the high suctions were being used. Top side ballast tanks were then used to discharge ballast and cool the main engine at the same time.

Vessel anchored at Suzannasdaal on passage up river to await tide, and clearance of another vessel which was on the berth. The anchorage was good, vessel used five shackles. Vessel then proceeded up river to Smalkalden but on passing Domburg, heard that the other vessel could not complete on time, so we had to pass the berth and anchor of Chatillon. The river is very narrow at this point and engines were kept on standby to be used when turning in case vessel became too close to the shore. Vessel docked at Smalkalden just before high water.

Outwards: On completion of loading, vessel sailed 2.5 hrs. before HW Paramaribo and proceeded down river. The vessels draft was 23 ft. 2 ins. and in places the river became very shallow and the vessel slid over mud at various points. The worst place noticed being between beacon "D4" and buoy No. 12 at Sunoza. The vessel again anchored off Suzannasdaal to await the rising tide 6 shackles in the water as the current was very strong. The vessel later sailed for the sea 3.5 hrs. before high water at Paramaribo and again touched bottom at various places whilst proceeding towards the sea. The main engine was cooled using ballast discharge for suction which is higher than normal high suction, whilst on passage beacons "R6" and "R10" were extinguished and 6 of the channel buoys were missing, also buoy lights were of extremely low intensity.

Restrictions: Vessels can enter and leave port day and night.

Max. Size: Agent advised that max. draft was equal to: (4.50 m. + height of tide) – FWA of 4".

However Pilot advised differently as follows:

Safe loading calculation:
Least channel depth . . . ft.
plus Rise of Tide . . . ft.
equals Safe loading draft . . . ft.

*Least channel depth rising tide (from Neap to Springtide 4.50 m.)
*Least channel depth falling tide (from Spring to Neaptide 4.35 m.)

Pilot also advises that the FWA from Sea Buoy to Suzannasdaal is practically nil – so do not take FWA into account.

VHF: Pilots and harbour office maintain a continuous watch on Channel 12.

Tugs: Not available and not normally required. Should vessel experience difficulties tugs can be called from Curacao.

Berthing: Suriname Billiton Bauxite Berth: Maximum permissible draft varies with the tide. Tidal range 1.16 to 2.39 m.

Maximum permissible length and breadth of vessel not known.

Loading-Discharge Gear: There are two shoots approximately 150 ft. apart which are semi-movable. Loading rate varies between 200 and 600 long tons per hour. Cargo operations continue throughout 24 hrs. A gang consists of one foreman and four men.

In addition to the facility at which we berthed, there are general cargo berths alongside the modern quay and a bulk aluminium loading berth with one shoot which is semi-movable.

Density: For the berth, the density is 998. Also see "Max. Size."

Fuel: Not available.

Fresh Water: Delivered by truck with capacity of 7 tons. Delivery is slow and extremely expensive. Arrangements are to be made with the foreman.

Medical: Hospital facilities available.

Shore Leave: Possible, however, crew required on board most of the time as vessel has to be shifted up and down the jetties for loaders.

Gangway: Accommodation ladder not used. Shore ladder is provided.

Provisions: Fresh fruit and vegetables available but of poor quality and very expensive.

Transportation: The town of Smalkalden is about 30 minutes by car from Paramaribo and about one hour by bus (taxi fare, 25 Guilders, bus fare one Guilder).

Publications: BA.517 and BA.99 also South American Pilot Volume 4 No: 7A used. BA Chart 99 does not extend far enough to sea as the sea buoy is not shown on it and the outer anchorage is about three to four miles outside this buoy. The Pilot informed me that the local Dutch Chart is available from the Harbour Master at Paramaribo and is much more satisfactory.

AUTHORITY: District Commissioner acts as Harbour Master.

NOTES

Please also advise Shipping Guides Ltd.

Sweden

AHUS: 55.56 N. 14.19 E. (See Plan Book)

DOCUMENTS: See "Stockholm".
PILOTAGE: Pilots meet vessels at Pallagrund. Telegraphic address: "Pilotstation, Ahus". Tel. 044–240027. VHF. Channel 16 call sign: "Pilot station, Ahus." Awaiting Pilot, anchor outside "Pallagrund". Depth 15–20 m. (Also see "Stockholm".)
ANCHORAGE: Anchorage forbidden in dredged entrance channel.
RESTRICTIONS: No special regulations.
MAX. SIZE: Max. length 160 m., max. draft 7.6 m.
HEALTH: No special regulations.
RADIO: Stockholm Radio (SDI) also VHF, Channel 16 and working Channel. Port radio: Ahus Port Radio keeps watch, Monday to Friday 0830 to 1600 hrs. on VHF Channel 16. Working Channel 11. At other times Ahus pilot station.
RADAR/VHF: Radar on pilot station. VHF call sign: Pilot station, Ahus. Channel 16.
TUGS: 1 tug available with advance notice.
BERTHING: Depth alongside (at MW) as follows:

Berth	*Length* (m.)	*Depth* (m.)
Wine Quay	100	4.2
No. 1–4	270	5.8
No. 5–17	740	7.2
No. 18–26A	475	8.2
26B	15	4.2

Depth allowance 0.6 m.

STEVEDORES: Ahus Stuveri AB. Tel. 044–240038. Working hours: Monday to Friday 0700–1600 hrs. Meal breaks 0845–0900 hrs. and 1200–1245 hrs.
FRESH WATER: Delivered from pipe-line.
FUEL: Available day and night.
FIRE PRECAUTIONS: No special regulations.
GANGWAY/DECK WATCHMEN: If wanted, watchmen available.
OPENING/CLOSING HATCHES: Normally by the crew.
CUSTOMS ALLOWANCE: See "Stockholm".
CARGO GEAR: 9 shore cranes, capacity 5–25 tons.
IDENTIFICATION CARDS: Crew list needed. No cards.
CONSULS: Danish Vice-Consul: Vasagatan 17B, 29153 Kristianstad. Tel. 044–114841. Norwegian Vice-Consul Mast. Bonggatan 2, 29154 Kristianstad. Tel. 044–115605.
REPAIRS: Minor repairs only.
DRY DOCKS: No dry dock. Nearest dry dock Solvesborg.
AIRPORT: Nearest airport about 10 miles away. 2 flights per day.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: See "Stockholm".
POLICE/AMBULANCE/FIRE: Police 242030; Ambulance 90000; Fire 90000.
TELEPHONES: 2 public telephones on quays.
AUTHORITY: Port of Ahus.

BROFJORDEN: 58.21 N. 11.25 E. (See Plan Book)

PORT LIMITS: Between "Stretudden" (crude oil berth) and the island "Rixo" in Brofjorden.
DOCUMENTS: Documents required for entry and clearance.

Certificate of Registry, Certificate of Tonnage, Derating Exemption Certificate, 3 Crew Lists, 1 Crew Manifest, 1 Declaration of Bonded Stores. Free pratique will be received via Customs on arrival berth. Oil Pollution Certificate.

PILOTAGE: Pilot station VHF Channel 16 around the clock. Channel 16 for calling only, thereafter changing to an agreed Channel. Call: Lysekils Pilots.

According to harbour regulations VLCC's are requested to give 72 hours ETA, and if any changes 48 and 24 hours ETA.

Product tankers are requested to give 48, if any changes 24 hours ETA.

Position where Pilot will board:

VLCC's	58° 13′ 05″ N.	11° 09′ 05″ E.
Product tankers	58° 15′ 01″ N.	11° 13′ 03″ E.

ANCHORAGES:

VLCC's	East Scaw, 57° 42′ N. 10° 49′ E.
	Water depth: 26 m.
	Holding ground: sand, good.

Only for Product tanker (up to 60,000 d.w.t.):

58° 20′ 03″ N.	Water depth: 28 m.
11° 21′ 00″ E.	Holding ground: clay, good
58° 19′ 07″ N.	Water depth: 26 m.
11° 23′ 05″ E.	Holding ground: clay, good

RESTRICTIONS: *For vessels of more than 100,000 d.w.t.* Berthing in daylight only.

Visibility minimum 4 miles, wind force max. 12 m./sec. and current max. 1 knot at the outer buoys (Nos. 1 & 2).

MAX. SIZE: *Crude oil jetty:*

Deadweight:	500,000 tons.
Length overall:	No limit.
Beam restriction:	No limit.
Draft restriction:	25 m. (82 ft.)

Product jetty (Berth 2 and 3):

Deadweight:	50,000 tons.
Length overall:	230 m. (754 ft.).
Beam restriction:	No limit.
Draft restriction:	14.4 m. (47 ft.).

Product jetty (Berth No. 1):

Deadweight:	7,000 tons.
Length overall:	120 m. (394 ft.).
Beam restriction:	No limit.
Draft restriction:	8 m. (26 ft.).

HEALTH: No special papers required. Master informs by radio or on arrival.
RADIO: For ETA cables to Agent and Receivers call Gothenburg Radio.
VHF: VHF stations are installed at the pilot station, the pilot boat, the tug boats and at the Scanraff Harbour office.

When mooring: the Pilot, Harbour Master, mooring boats and the mooring gangs carry portable VHF sets. Channel 69 is usually used.

RADAR: At the pilot station two radar sets are installed for watching the entrance.
TUGS: *For VLCC's:* Tugs made fast after passage of Dynabrott and Brandskars flak light houses.

For Product tankers: Tugs made fast when passing Bubacka Buoy (opposite crude oil berth).

BERTHING:

Instruments:	SAMI-doppler and current meter at crude jetty.
Salinity:	18 – 34% 0
Current velocity:	0.2 – 0.9 knots at entrance.
Nature of bottom:	Clay.

The crude and product jetties are equipped with quick release hooks. The coaster berth has common bollards.

One Safety Tug-boat is always standing-by within the harbour area in case of emergency. When a Crude Carrier is alongside an additional Safety Tug-boat is standing by.

MEDICAL: Hospital available in Lysekil. No particular inoculations required.

TANKERS: Cargo handling facilities.
Crude Jetty:

Size:	*Flange rating*	*Service*
12 in.	150 lb ASA	Bunker "C"
16 in.	,,	Crude oil.
16 in.	,,	,, ,,
16 in.	,,	,, ,,

Product Jetty: (Berth 2 and 3)

Size	*Flange rating*	*Service*
10 in.	150 lb ASA	Reg. gas.
10 in.	,,	Prem. gas.
10 in.	,,	Diesel, F.O. 1.
10 in.	,,	,, ,,
12 in.	,,	F.O. 4, F.O. 5.
12 in.		,, ,, Ballast, bunker

Product Jetty: (Berth 1)

Size	*Flange rating*	*Service*
6 in.	150 lb ASA	Prem. gas, reg. gas, naphtha.
6 in.	,,	Diesel, F.O. 1.
8 in.	,,	F.O. 4, F.O. 5 Ballast.
10 in.	,,	Molten sulphur.

Max. discharge rate at Crude Oil Jetty 18,000 cu.m. per hour. Max. pressure allowed 10 Kilos. Max. loading rate at Product Jetty 1,500 cu. m. per hour. Max. pressure allowed 10 Kilos.

Both Crude and Product Jetty have 6 in. 150 lbs sanitary sewer and 4 in. 150 lbs potable water connections available which may be used by running hose from ship.

All arms are hydraulically operated except those at the Coaster Jetty. No hoses are allowed for oil handling.

Ballast water can be discharged at Product and Coaster Jetties.

FUEL: Bunker C only is available at Crude Oil Jetty. Bunker C and diesel oil are available at Product Jetties and the Coaster Jetty.
FIRE PRECAUTIONS: A special Fire Instruction will be given on board on arrival.
POLLUTION: Oil pollution prevention. A special instruction will be given on board on arrival.
CONSULS: Denmark, Finland, Holland, Norway and Germany have consuls in Uddevalla, 40 km. from Scanraff.
REPAIRS: Uddevallavarvet and Skandiaverken. For hull and engine repairs, harbour and voyage service.

Pemco: For construction work, mechanical erection and repairs.

Andersson & Callenberg: For electrical installations.

Engine repairs must be reported to Port Captain for permission.

DRY DOCK: Gothenburg, capacity 250,000 tons.
SURVEYORS: Det Norske Veritas and Lloyds.
GANGWAY/DECK WATCHMEN: The crude oil jetty has gangway tower. But accommodation ladder is necessary in the product harbour.

Watchman is compulsory at the Crude Oil Jetty. At the Product Jetty watchman is available on request.

CUSTOMS ALLOWANCE: 1 bottle spirit and 200 cigarettes or 200 grams tobacco.
REPATRIATION: Changing of crew and any necessary repatriation is possible.
AIRPORT: Nearest airport is Gothenburg, 100 km. South of Lysekil.
TIME: GMT plus 1 hour all the year round.
POLICE/AMBULANCE: Dial 90 000 and ask for necessary service.
TELEPHONES: A telephone can be connected on board.
SERVICES: Compass adjusting is available.
SHORE LEAVE: Crew members are allowed ashore. No identification card or passes are needed.
REGULATIONS: The Harbour Regulations will be placed on board on arrival.

GENERAL: At the Crude Oil Jetty there is a refuse container to be lifted on board by means of the ship's gear. At the Product Jetty are 2 containers, which will remain ashore. These containers are free of charge to the ships.
AUTHORITY: Scanraff.

GAVLE: 60.41 N. 17.11 E. (See Plan Book)

PORT LIMITS: A line from Utvalnas (approx. 60° 45.2′ N. 17° 21.4′ E.) over Bakharen to Langharen (approx. 60° 41.0′ N. 17° 17.5′ E.).
DOCUMENTS:
4 Crew Lists (for European vessels).
2 Crew Lists (for other vessels).
2 Manifests.
2 Bills of Lading.
1 Tobacco List.
1 Stores List.
Following documents supplied by Agent and signed by Master:
On arrival from foreign port:
1 Maritime Declaration of Health.
4 Report of Arrival (customs).
1 Declaration of Master (of persons on board).
1 Declaration of living animals (if any).
On arrival from any port:
1 Report of Arrival (Harbour Office).
1 Report of Receivers (Harbour Office).
1 Cargo List (or Manifest).
1 Transfer.
On departure to foreign port:
4 Report of Departure.
1 Declaration of Master (of persons on board).
On departure to any port:
1 Report of Shippers (Harbour Office).
1 Declaration by foreign Master.

PILOTAGE: *(a)* Sea Pilots: Pilot station: Bonan Telephone Nos. 991 10 and 992 20. Telegraphic address: Pilotstation, Gavle. 5 hours advance notice of ETA pilot station. Notice of ETA can be given over any Swedish coastal radio station or free of charge on VHF over any Swedish pilot station or Grundkallen lighthouse.
VHF: Channels 16: Calling and Safety} Pilot station and
13: Pilotage traffic } Pilot boats.

All pilot boats orange. International signals for calling pilot. Pilot boards: S.E. of Grasjalsbadan 60° 43′ N., 17° 27′ E., and on request South of Eggegrund Lighthouse, 60° 43′ N., 17° 34′ E. In case of bad weather closer to pilot station. Anchorages: Graberget roadstead N.E. of Bonan Lighthouse (approx. 60° 44.8′ N. 17° 20.5′ E.), about 350 m. (0.2 m.) from shore and in 18–21 m. (10–13 fathoms) deep. Open for Easterly winds. *(b)* Harbour Pilots: Available for moving within harbour area on application to Port Administration, Telephone Nos. 12 49 10 or 11 31 56 or by VHF to Gavle Port Radio, Channels 16, 14 and 13.

ANCHORAGES: See "Pilotage". Outer roadstead situated inside of Northern entrance and in red sector of Fredriksskans light. Outer roadstead well protected, depth of 15-11 metres (8–6 fathoms). Anchoring forbidden:
(a) In dredged channel between lights in Northern channel and to a point 800 m. (875 yds.) W.S.W. of Light No. 4.
(b) In white sector of Fredriksskans light E.N.E. within a distance of 2,000 m. (2,190 yds.) from same.
(c) In navigable channel from Fredriksskans Light to Gavle Dolphin Light.
(d) In Fredriksskans Harbour basins.
(e) In Gavle River from berth No. 18 to berth No. 10.

RESTRICTIONS: Two fairways lead to harbour. Northern fairway is 11, 1 m. (36 ft. 6 in.) deep and has bottom width of 60 m. (196 ft. 11 in.) Day-time: max. draft 10.6 m. (34 ft. 5 in.); max. length 210 m. (689 ft.); max. breadth 28 m. (91 ft. 10 in.). Night-time: max. draft 7.55 m. (24 ft. 5 in.); max. length 172 m. (565 ft.). Southern fairway (daylight only) permits draft of 3 m. (9 ft. 9 in.). All depths are referred to mean water level. Ships on way from outer roadstead or passing from Fredriksskans Harbour to Inner Harbour shall give way to vessels proceeding in opposite direction. This shall not apply to vessels with tow unless vessel approaching also has tow.

MAX. SIZE: Max. permissible draft (at mean water) as follows:
Fredriksskans Harbour

	Max. Draft m.	*ft. in.*	*Real depth m.*	*Allowance m.*
Oil berth No. 21	10.5	34 05	10.9	0.4
				Max. length 210 m. (689 ft.)
Oil berth No. 1	7.45	24 05	7.8	0.35
				Max. length 200 m. (656 ft.)
Oil berth No. 2–3	5.3	17 05	5.5	0.2
Berth No. 4–8	7.45	24 05	7.8	0.35
Berth No. 9–14	9.0	29 06	9.4	0.4
Inner Harbour (River Gavle and Nyhamn)				
Berth No. 25–38	4.7	15 05	5.0	0.3
Berth No. 8–23			4.85	0.15

	Max. Draft m.	*ft. in.*	*Real depth m.*	*Allowance m.*
Korsnas Works				
Kastet Pier, North side, outer end. Length 77 m. (252 ft.)	7.45	24 05	7.8	0.35
Kaster Pier, South side, outer end. Length 105 m. (344 ft.)				
Kastet Pier, North side, inner end. Length 53 m. (174 ft.)	6.3	20 08	6.6	0.3
Kastet Pier, South side, inner end, Length 45 m. (148 ft.)				
Karskar				
Berth No. 105–106 Length 195 m. (640 ft.)	6.6	21 08	6.9	0.3
Berth No. 107–108 Length 196 m. (640 ft.)	7.9	25 11	8.2	0.3
Berth No. 109 Length 90 m. (295 ft.)	4.7	15 05	4.9	0.2
Berth No. 110, South end. Length 35 m. (115 ft.)	4.7	15 05	4.9	0.2
Berth No. 110, North end. Length 75 m. (246 ft.)	6.1	20 00	6.4	0.3

Terminal Granudden: See"Cargo Handling".

HEALTH: Pratique always automatic. If any suspected disease or fever on board, notify ship's Agent.
RADIO: Stockholm Radio (SDH) or Harnosand Radio (SAH).
RADAR/VHF: No port radar service, but Bonan pilot station, Eggegrund Lighthouse, and one pilot cutter equipped with both radar and VHF and assists any ship approaching pilot station on request. After calling pilot station on VHF Channel 16, ships will be given assistance on Channel 13, 12, or 6.
TUGS: Join vessel outside Fredrikskans Lighthouse or outside Korsnas Works for berthing, and outside Northern entrance channel for passage through same. Ship's lines always used.
CARGO HANDLING: Container berth, max. draft 9 m. One crane with 30-ton capacity.
Roll-on/roll-off berth, max. draft 4.7 m.
Terminal Granudden: A new port terminal at Granudden which is situated opposite Fredriksskans Harbour. The terminal comprises of 350 m. of quay with a Roll-on/Roll-off berth, having max. draft for vessels: 9.0 m. for length of 150 m. adjacent to the Roll-on/Roll-off ramp and 10.5 m. for length of 200 m., 2 warehouses each having an area of 22,000 sq.m., as well as extensive storage space. The total terminal areas is 150,000 sq.m. and it will have an annual maximum capacity of 1.2 million tons forest products. The terminal has very good connections with both main roads and the railway system.
STEVEDORES: 24 hours notice (if possible) order arrange gangs.
MEDICAL: Notice of medical attention to Agent as early as possible. All kinds of medical and hospital facilities available. Smallpox vaccination required on arrival from non-European ports. Other vaccinations necessary on arrival from diseased area. (Common for all Swedish ports.) Quarantine station established at Gavle with quarantine anchorage on outer roadstead.
TANKERS: *Tanker Berth No. 21*
Max. length 210 m. (689 ft.). Max. draft (M.W.) 10.5 m. (34 ft. 5 in.).
Manifold connection size (all grades) 200 mm. (8 in.).
Berth to Depot pipe-line size:

	mm.	in.
Heavy Fuel Oils	450	18
Gas Oil	400	16
Gasoline	350	14
Kerosene	250	10

Tanker Berth No. 1:
Max. length 200 m. (656 ft.). Max. draft (M.W.) 7.45 m. (24 ft. 5 in.).
Manifold connection size:

	mm.	in.
Fuel Oils	250	10
Gasoline	200	8
Kerosene	200	8

Berth to Depot pipe-line sizes:

	mm.	in.
Fuel Oils	350	14
Gasoline	300	12
Kerosene	250	10

Tanker Berth No. 2 and 3:
Max. length 125 m. (407 ft.). Max. draft (M.W.) 5.3 m. (17 ft. 5 in.).
Manifold connection size (all grades) 150 mm. (6 in.).
Berth to Depot pipe-line sizes (all grades) 150 mm. (6 in.).
Tanker Berth No. 105-106:
Max. length 195 m. (640 ft.). Max. draft (M.W.) 6.6 m. (21 ft. 8 in.).
Manifold connection size (all grades) 200 mm. (8 in.).
Berth to Depot pipe-line (all grades) 250 mm. (10 in.).
Tanker Berth 107-108:
Max. length 195 m. (640 ft.). Max. draft (M.W.) 7.9 m. (25 ft. 11 in.).
Manifold connection size (all grades) 200 mm. (8 in.).
Berth to depot pipe-line (all grades) 250 mm. (10 in.).
New Tanker Quay K201:
Max. length 210 m. (689 ft.). Max. draft 10.5 m. (34 ft. 5 in.).
Owned by Krangede A.B.

DENSITY: Fresh water.
FRESH WATER: Delivered from water posts at all quays in Fredriksskans Harbour. Inner Harbour, at Korsnas Works and on roads fresh water delivered by water boat.
FUEL: All kinds of fuel oils available either from pipe-lines at oil berths or by lorries at all other quays. Following viscosities (Redwood I) normally in stock: 35, 225, 650, 1500, and 3500 secs. Other viscosities can also be delivered. Notice of delivery is required day before.
DEVELOPMENTS: New shipping terminal for coal and coke where discharging capacity will be very high.
GANGWAY/DECK WATCHMEN: Available, but not compulsory.
OPENING/CLOSING HATCHES: Can be done by either crew or stevedores. Only patent hatches have to be opened by crew.
CERTIFICATES:

Tonnage Certificate.
Derat Certificate (Not older than 6 months).
Certificate of Nationality (for Swedish ships only).

CUSTOMS ALLOWANCE: Tobacco: each crew member 200 cigarettes or 100 grammes of tobacco out of Bond.
Wine and spirit: Each crew member 1 bottle (75 centilitres) of spirit and moderate quantities of wine and beer out of bond. After a week in Sweden the same quantity may be taken out on request to Customs Office.
IDENTIFICATION CARDS: Not needed.
CONSULS:

Denmark
Finland
France
Great Britain
Netherlands
Norway
Portugal

REPAIRS: The former shipyard Gavle Varv carries out all types of deck and engine repairs along fitting-out quay 200 m. (656 ft.) long, with water depth 3.8 m. (12 ft. 6 in.) and with max. draft 3.65 m. (11 ft. 11 in.) at mean water. One 10-ton luffing crane. Another berth along South side of former slip-way with water depth 5.9 m. (19 ft. 7 in. and maximum draft 4.7 m. (15 ft. 5 in.) at mean water also available. Repairs can also be carried out in all parts of harbour.
DRY DOCKS: None.
REPATRIATION: Crew changes and repatriations arranged by Agent.
AIRPORT: Stockholm Airport (Arlanda) 145 km (90 miles) served by regular airlines. Rorberg airport 16 km. (10 miles). Regular traffic to Swedish airports.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: New Year's Day (Jan. 1st); Twelfth Day (Jan. 6th); Good Friday; Easter Day; Easter Monday; First May (May 1st); Whit Sunday; Whit Monday; Midsummer Day (Saturday nearest to June 24th); All Saints' Day (first Saturday in Nov.); Christmas Day (Dec. 25th); Boxing Day (Dec. 26th).
POLICE/AMBULANCE/FIRE: Police 11 53 00; Ambulance 12 90 90; Fire 12 90 90. Emergency 90 000.
TELEPHONES: Fredriksskans and Inner Harbour: Telephones can be placed on board at all berths in Fredriksskans Harbour and at three berths in Inner Harbour. At Korsnas Works: Telephones can be placed on board at two berths in Karskar and one at Kastet Pier.
SERVICES: *(a)* Minor quantities of oil and other liquid residues can be discharged into tank lorries with special suction equipment (approx. 6 cu.m. = 210 cu.ft. per lorry). *(b)* Compass adjusting by licensed adjusters. *(c)* An area for compass adjusting is established on outer roadstead. *(d)* Speed trails can be made on measured mile between Eggegrund Lighthouse and island of Limo
DELAYS: Normally no delays in berthing, loading, discharging or bunkering.
AUTHORITY: Gavle Hamn (Gefle Port Authority).

GOTHENBURG: 57.42 N. 11.57 E. (See Plan Book)

DOCUMENTS:

3 Cargo Declarations (Imco model).
4 Crew Lists.
3 Passenger Lists.
2 Tobacco Lists (must be signed by each Crew member).
1 Stores List.
1 Health Document.
Ship's Papers.
Nationality Certificate.
If stay more than 48 hours, Articles to Consulate.
Manifests, Bills of Lading.

PILOTAGE: Cable address: 404 47 Vinga. Vessels with VHF equipment may contact on international call frequencies 156.8 Mc/s. (Channel 16). Working frequencies for Sea Pilots 156.65 Mc/s. (Channel 13) and for Harbour Pilots 156.6 Mc/s. (Channel 12). Pilot station located at Vinga Lighthouse. Sound or light signal G towards Vinga lookout. Pilot boat located outside Trubaduren Lighthouse, where Pilot taken on board. Approved pilot ladder, if rail is high accommodation ladder, heaving line, and a man standing-by to receive Pilot. (Also see "Stockholm").
ANCHORAGE: At Rivo Fiord and Dana Fiord. VLCC's anchor 2 miles S.W. of Trubaduren Light.
MAX. SIZE: Torshamnen, water depth 64 ft. 4 in. (19.6 m.). Tankers of 225,000 d.w.t. received. Skarvik Harbour, water depth 42 ft. (13 m.). Tankers up to 50,000 d.w.t. Skandia harbour, general cargo, container vessels, water depth up to 39 ft. (12 m.). General cargo harbours: for other cargo and passenger vessels 39 ft. (12 m.). Water depth at MWL. Tide of no importance.
HEALTH: The Master of every ship, whose voyage has touched lands outside Europe (excepting U.S.A., Canada, Azores, Canaries, Madeira and Morocco), and who within 28 days arrives at Gothenburg from a port in any such land, shall submit to Customs on demand a Declaration of Health for the ship in the prescribed form. If ship arrives within 14 days of calling at any such port she must not touch land until inspected by the Quarantine Medical Officer and permission to land granted. Master must be prepared to state whether all persons on board possess internationally valid evidence of inoculation for smallpox. Compulsory medical examination not required where a ship liable to inspection has undergone an approved Quarantine Inspection in either a Danish, a Norwegian or a Finnish port, and all questions in the Declaration of Health have been answered negatively. Exemption may also be granted to any other ship which would otherwise be liable for examination, if Master, pursuant to Article 21 of Quarantine Regulations for Sweden, has previously radioed all information regarding state of health on board to Health Authorities (radio-pratique). Telegraphic address: "Portsan, Gothenburg". Messages must be made not less than 4 hours prior to ETA. (Preferably, messages should not be made during night). Free-pratique messages should include: Name of the ship; estimated time and day of arrival; number of crew; number of passengers; information as to whether all persons on board possess valid certificates of vaccination for smallpox (issued within the last 3 years); names of the last two ports called at outside Europe, and dates of departure therefrom; replies to the 6 questions contained in Declaration of Health.
RADIO: Goteborgs Radio, call sign SAG.
TUGS: Tugs normally join vessel between the island Nya Alvsborg and Rya Nabbe. Vessels use their own lines. Tugs join at Dana Fiord for tankers bound for Torshamnen.
BERTHING: No restrictions at any time of day and night. VLCC's berth in daylight only.
BRIDGES: Alvsborg Bridge (suspension bridge) in Western part of city, clearance 147.5 ft. (45 m.). Gotaalv Bridge in centre of city, clearance 64 ft. (19.5 m.). Ships should give three long blasts with whistle for bridge to be opened. If opening not required they have to give one long and one short blast. It is possible to contact Gotaalv Bridge on frequency 156.80 Mc/s. (Channel 16). Working frequencies are 156.70 Mc/s. (Channel 14) and 156.60 Mc/s. (Channel 12).
STEVEDORES: Goteborgs Stuveri AB provides dock workers.
CONTAINERS: The Skandia Harbour for container handling with 4 terminals including 15 berths and 9 ferry ramps. Depths up to 39 ft. 04 ins. (12 m.).
TANKERS: One berth for discharging of crude oil with draft of 62 ft. 6 in., and lines 12 in. and 16 in.

		Permitted draft at MWL	*Lines diameter (in.)*
Tors Harbour	1 berth for disch. crude oil.	52 ft.	12 & 16
Skarvik Harbour	1 berth for disch. and loading.	40 ft. 6 in.	10
	4 berths for disch. and loading.	31 ft.	8
Rya Harbour	4 berths for disch. and loading.	31 ft.	8
In Oil Harbour	18 berths for coast-distribution.		

Reducing pieces available in Oil Harbours.
DENSITY: Average density 1030. Tide of no importance.
FRESH WATER: Available from quay or water boats.
FUEL: All grades available at short notice.
GANGWAY/DECK WATCHMEN: Watchmen accepted by Harbour and Fire Authorities on tankers and vessels loaded with explosives. On other vessels not necessary.
OPENING/CLOSING HATCHES: By crew or stevedores.
CUSTOMS ALLOWANCE: Tobacco, per week 200 cigarettes or 250 gram other tobaccos. Wine and/or Spirits, per week 1 bottle of spirits and 1 litre of wine, alternatively 2 litres of wine.

Require report latest 24 hours prior to arrival, and re-confirmation of arrival time latest 2 hours in advance.
CARGO GEAR: Certificates that equipment is approved.
IDENTIFICATION CARDS: Not necessary. Crew list to be furnished in the oil harbours.
CONSULS:

The following countries are represented in Gothenburg:

Argentina
Austria
Barbados
Belgium
Bolivia
Brazil
Chile
Colombia
Costa Rica
Denmark
Dominican Republic
El Salvador
Fed. Rep. of Germany
Finland
France
Great Britain
Guatemala
Honduras
Iceland
Ireland
Italy
Ivory Coast
Japan
Lebanon
Liberia
Mauritania
Morocco
Mexico
Netherlands
Nicaragua
Norway
Pakistan
Panama
Paraguay
Peru
Portugal
Senegal
South Africa
Spain
Switzerland
Tunisia
Uruguay
U.S.S.R.
Venezuela
Yugoslavia

REPAIRS: All kinds of repairs possible.

DRY DOCKS: One dry-dock, 7 floating docks with lifting capacities up to 55,000 tons.
REPATRIATION: Excellent communications by air or by rail.
AIRPORT: Distance of Landvetter Airport 20–30 km. depending on where ship is berthed. Airport served by regular airlines.
HOLIDAYS: 1st January; 6th January; Good Friday; Easter Sunday; Easter Monday; 1st May; Ascension Day; Whitsun; Whit-Monday; Midsummer Day; All Saints' Day; Christmas Day and Boxing Day. No work in port on Sundays and holidays except in terminals for container and passenger traffic.
POLICE/AMBULANCE/FIRE: Tel. 90 000, ask for "Polislarm", "Ambulans", or "Brandlarm".
TELEPHONES: At all quays ships can be connected to telephone.
GENERAL: Seaman's Institute, Amerikagatan 2, open weekdays 1000 to 2000 hrs., Sundays 1400 to 2000 hrs.
SERVICES: Tank-cleaning equipment and facilities for discharge of tank-washings in the Skarvik Harbour. Compass adjusting.
AUTHORITY: Port of Gothenburg.

HALLSTAVIK: 60.03 N. 18.35 E. (See Plan Book)

DOCUMENTS: 4 Crew Lists; other documents see "Stockholm".
PILOTAGE: Svartklubben Pilot Station. VHF Channel 16 and others. Radar at station and in boats. 5 hours notice prior to arrival. Phone: Hallstavik 0175/10006. Cable: "Pilotstation Hallstavik".
ANCHORAGE: Good and protected anchorage places available.
RESTRICTIONS: Tankers are navigated in daylight only.
MAX. SIZE: Draft not to exceed 23 ft.
HEALTH: No special action except for suspected disease. In case of disease contact Agent for information.
RADIO: Stockholm Radio.
TUGS: Normally available.
STEVEDORES: Loading effected by factory. Ordinary working hours: 0630–1530, maximum 1 hour overtime. Saturdays no work.
MEDICAL: Medical attendance available day and night.
TANKERS: Max. draft 23 ft. Connection 6 in., pipe quay-cisterns is about 1,000 m., discharging rate about 200 t.p.h.
DENSITY: Practically fresh water.
FRESH WATER: Available from quay; rate 1 t.p.h.
FUEL: Delivered by lorries from Stockholm.
CONSULS: At Stockholm, 100 km. away.
REPAIRS: Minor repairs only.
OPENING/CLOSING HATCHES: Ship's crew.
CUSTOMS ALLOWANCE: 200 cigarettes and 1 bottle of spirits out of bond.
CARGO GEAR: Loading by ship's gear.
AIRPORT: Stockholm Airport Arlanda, 75 km. away.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: Easter; Whitsuntide; Midsummer; Christmas and New Year's Day.
POLICE/AMBULANCE/FIRE: Alarm Tel. 90000.
GENERAL: Shippers: Holmens Bruk AB. Export about 250,000 tons of newsreel/year. Import about 130,000 tons of fuel oil. 2 ordinary loading quays and 1 roll-on/roll-off berth available.

HALMSTAD: 56.40 N. 12.52 E.

DOCUMENTS:
2 Crew Lists.
2 Passenger Lists.
5 Manifests.
2 Bills of Lading and Ship's Papers.
PILOTAGE: Advance notice of ETA 5 hours before required. Pilot station and pilot boat equipped with VHF, Channels 16, 13, 6. Pilot boards by lightbuoy Halmstad Road (Fl. 3 secs.) Pos. 56° 38′ N. 12° 48.9′ E. (Also see "Stockholm".)
ANCHORAGES: Good holding ground in 30-40 ft. on road 1 to 2 miles S.E. of breakwater.
MAX. SIZE: Max. length 700 ft.; max. draft 30 ft.
RADIO: Gothenburg Radio.
VHF: Port Authority on Channel 16 and 19.
TUGS: Meet at Halmstad Road. Ship's lines used.
MEDICAL: Hospital facilities available.
TANKERS: Max. draft at oil berth 30 ft. Diameter of discharge lines 8 and 10 in.
FRESH WATER: Fresh water available from berth 35 t.p.h.
FUEL: Viscosities available 1.2 englergrades/20°C. By arrangement ship's Agent.
GANGWAY/DECK WATCHMEN: Not necessary. Available if required.
OPENING/CLOSING HATCHES: Normally carried out by crew, but if carried out by stevedores cost charged to vessel.
SHIP CERTIFICATES: Bill of Measure, Nationality Certificate and Derat Certificate.
CUSTOMS ALLOWANCE: Tobacco/spirits, 1 bottle spirits, 1 bottle wine and 200 cigarettes free on board. Quantity over will be closed under Customs seal. No other restrictions.
IDENTIFICATION CARDS: Only needed in oil harbour.
CONSULS:
Danish Consulate, Tel. 11 8600
Dutch Consulate, Tel. 11 8560
Norwegian Consulate, Tel. 11 8860
Finnish Consulate, Tel. 11 8700
German Consulate, Tel. 10 0910
REPAIRS: Shipyard carries out ship repairs.
DRY DOCKS: 2 slips.
REPATRIATION: Facilities exist for changing crew and repatriation.
AIRPORT: Halmstad Airport, 1 mile from town centre. 2 flights per day for Stockholm.
TIME: GMT plus 1 hour. No alterations.
HOLIDAYS: New Year's Day; Twelfth Day; Good Friday; Easter Day; Easter Monday; All Saints' Day; Christmas Day; Christmas Monday, Labour Day. No work can be arranged these days.
POLICE/AMBULANCE/FIRE: Tel. 90 000.
TELEPHONE: For placing a telephone on board cost is 42 crs., and 15 crs. a day for hire.
SHORE LEAVE: Crew members allowed ashore.
AUTHORITY: Halmstad Hamnforvaltning.

HARGSHAMN: 60.10 N. 18.29 E.

The port is situated in the Archipelago of Oregrund, about 130 km. North of Stockholm and about 110 km. South of Gefle. Only iron ore products are exported, and the port is managed by the shippers, AB Dannemora Gruvor. It is a natural and well sheltered harbour, suitable for vessels up to about 25,000 d.w.t., bigger vessels are loaded with limited cargoes.
DOCUMENTS: ETA is to be given 48 and 24 hours in advance by cable or phone to "Oreship Uppsala". On arrival a cargo-plan is to be given to the Agent or foreman, stating quantity required and loading-rotation of hatches, as well as estimated draft on sailing.
The Customs Officers require the following documents on arrival.
Tonnage Certificate (Certificate of Registry).
Certificate of Nationality.
Swedish Light Dues receipts for current year.
Crew List IMCO FAL Form No. 5, 3 copies
Crew's effects declaration IMCO FAL Form No. 3, 1 copy
Ship's stores declaration IMCO FAL Form No. 4, 1 copy.
If the international IMCO Forms are not available, similar Forms are accepted.
PILOTAGE: It is not compulsory to engage a Pilot except for tankers and other vessels carrying dangerous cargoes. Entry without a Pilot is not recommended and should not be attempted without the most detailed local knowledge and previous experience of the port. Pilotage dues will only be charged if a Pilot is actually employed.

Pilot is embarked off Svartklubben lighthouse (60.09 N. 18.52 E.) and has to be ordered 5 hours before needed. Pilot can be ordered via the Agent, the Svartklubben Pilot station, phone: Hallstavik (0175) 100 06. Cable: "Pilotstation Hallstavik" or by VHF at any of the Swedish Pilot stations. Distance to Hargshamn is about 17 miles. For vessels arriving from ports in Gefle district, Pilot will board on request at Oregrund or North thereof, such request to be made as above.
RESTRICTIONS: Loaded vessels with draft over 23 ft. 6 in. at MWL are navigated in daylight and good visibility only.
MAX. SIZE: Max. draft allowed (at MWL in FW) 34 ft. (10.4 m.). Density of water: 1,006. Max. length about 575 ft. (175 m.). Max. breadth about 80 ft. (24.4 m.). The breadth limitations may be increased in the case of ore-carriers with side tanks. Max. distance water level to hatch coamings about 33 ft. (10 m.).
TUGS: A steam tug of 800 h.p. is available from Hallstavik, and is normally used to assist vessels over 9,000 d.w.t. on departure only. A small tug of 230 h.p. is available at the port.
BERTHING: There is an ore quay about 90 m. in length and depth alongside of 36 ft. The loading conveyor moves along the quay over a distance of 85 m., therefore only the biggest vessels have to shift during loading. Loading capacity 650–800 t.p.h. Stowage factor of the ore 17–18 cu. ft./ton and concentrate about 13/14 cu.ft. per ton.
STEVEDORES: Work is effected in 2 shifts: 0600–2200 hrs., Saturdays and days before holidays 0600–1200 hrs. Work on night shift and on Sundays/holidays can be arranged on request. However, on the following holidays work cannot be arranged: New Year's Day, Good Friday, Easter Eve, Easter Sunday, 1st May, Whitsun Eve, Whit Sunday, Midsummer holidays (last Friday/Sunday in June), All Saint's Day (1st Saturday in November), Christmas Eve, Christmas Day, New Year's Eve.
FRESH WATER: Available.
CUSTOMS ALLOWANCE: 100 cigarettes per man and 1 bottle of spirits per officer.
ICE: The port can be kept open all Winter by an ice-breaking tug. Normally there is ice from the last week of December until the last week of March/first week of April. In port and the entrance there is fast ice up to 1.5 – 2 ft. Navigation is maintained in a broken ice-channel. At the pilot station or in the Aland Sea there is very seldom packed ice or other difficulties during a normal Winter.
AUTHORITY: AB Dannemora Gruvor.
AGENT: Bjorsbo Shipping HB, S-740 73 Hargshamn. Tel: Osthammar 0173-200 80. Telex: 76042. Telegrams: ORESHIP UPPSALA.

HARNOSAND (Hernosand): 62.37 N. 17.58 E.

DOCUMENTS:

2 Crew Lists and/or 2 Passenger Lists (stating what tobacco, cigarettes or spirits each man has).

Deratification certificate.

Manifest and/or Bills of Lading.

Register, and if vessels before in Sweden same year, bills for light dues paid.

PILOTAGE: Applications for licensed Pilots should be made at least 5 hours before arrival. When making application, specify name of vessel, tonnage, draft and destination. Also give estimated time for taking Pilot on board and route. If this procedure not followed, the Maritime Service cannot guarantee to supply a Pilot without considerable delay to vessel.

Preferable make application by telephone or by radio via a coastal station or by some other method direct to Pilot station. Also possible request Pilot by VHF.

Pilot Station at Harnoklubb.

ANCHORAGES: In port approaches in depth of 20 to 40 m.

RESTRICTIONS: Harbour can be closed by ice some time during Winter but assistance given by State Ice-breakers as long as possible.

MAX. SIZE: Up to 33 ft. draft.

RADIO: Cable Agents to give ETA, draft and cash required via either Hernosand Radio SAH or Stockholm Radio SDJ.

HEALTH: Vessels arriving from ports outside Europe must, for inward clearance, provide Customs Officer with written declaration of freedom from infection. Further instructions will be issued by Customs Office were such a declaration cannot be given.

TUGS: Tug assistance is available.

BERTHING: Depth alongside main quays from 7 to 8 m.

TANKERS: Oil pier, depth alongside 10.50 m.

DENSITY: Nearly fresh water.

FRESH WATER: Available from the quays or by barge.

FUEL: Can be supplied.

GANGWAY/DECK WATCHMEN: Available for gangway. Not compulsory.

OPENING/CLOSING HATCHES: Normally done by crew.

CUSTOMS ALLOWANCE: 200 cigarettes and one bottle of 75 centilitre per man/week. Extra granted on request.

CERTIFICATES: See "Stockholm".

IDENTIFICATION CARDS: Not necessary.

REPAIRS: Most repairs possible.

DRY DOCK: At Gustavsvik.

TIME: GMT plus 1 hour permanent.

HOLIDAYS: New Year's Day; Epiphany; Good Friday; Easter Monday; Labour Day; Ascension Day; Whit Monday; Midsummers Day; All Saint's Day; Christmas Day; Second Christmas Day.

Working ceases at 1130 hrs. on the following eves of holidays and is voluntary and paid with 100 per cent overtime: Easter Eve; Whitsun Eve; Midsummer's Eve; Christmas Eve and New Year's Eve.

POLICE/AMBULANCE/FIRE: Telephone numbers: Accidents, Police, 90000; Fire: ask for alarm 90000.

AUTHORITY: Harnosands Hamn.

HELSINGBORG: 56.03 N. 12.41 E. (See Plan Book)

DOCUMENTS: See "Stockholm".

PILOTAGE: Call Pilot on the VHF Channel 16. Pilots board about half nautical mile off jetty of Helsingborg Northern Harbour. Good anchorage within area of about half nautical mile off jetty.

ANCHORAGES: Areas as above, depths of water 50–70 ft.

MAX. SIZE: Permissible length about 220 m.; breadth unlimited; draft 34 ft. on MLW. No tides but certain variations following prevailing winds.

Tankers: Max. draft 10.5 m.

HEALTH: Pratique automatic for all vessels arriving from non-infected ports. In cases where pratique should be obtained, notice to be given through ship's Agent. Further directions given by Pilot.

RADIO: For communication – Goteborgs Radio.

VHF: 24 hours watch on Channel 16. Call sign "Helsingborg Harbour", working Channels 11 and 12. Ships to contact the harbour 1 hour before arrival and 1 to 1/2 hour before departure.

Pilots: Channel 16, working Channels 13, 14 and 69.

Tugboats: Working Channels 11, 12 and 69.

TUGS: Join vessel outside entrances. Vessel's lines used.

3 tugs available, up to 2,640 h.p.

BERTHING: Basin No. 1, depth 6 m.

Basin No. 2 depth 5 to 7.3 m.

Basin No. 3 depth 5 to 7 m.

Basin No. 4 (Ocean Terminal), depth 8 to 10 m.

Basin No. 5 (Tanker Terminal), see "Tankers".

Basin No. 6 depth 8 to 10.5 m.

Basin No. 7 (Skane Container Terminal), depth 8 and 11.5 m.

Basin No. 8 (Copper Mill Harbour), depth up to 11.5 m.

CRANES: 35 cranes with capacity up to 45 tons.

BULK CARGO FACILITIES: 2 berths of 215 m. length for grain and fertilizers, max. draft 9.9 m.

SPECIALISED CARGO-HANDLING FACILITIES: Complete container terminal "Skane Terminal" with 540 m. berths and 2 Ro/Ro berths, max. draft 11 m. All types of handling equipment. Liquid chemicals handled at the tanker terminal.

STEVEDORES: Cargo handling performed by "Skaneterminalen AB" offering all kind of harbour works including loading, discharging, warehousing, etc.

MEDICAL: for attention, application to be made through ship's Agent. Hospital facilities available.

TANKERS: Dimensions of pipe-lines – for oils, 14 in., 12 in., 8 in., petrol, 12 in., 10 in., 6 in., slops, 6 in. Discharge facilities for slops through pipe-lines from berths numbers 503, 504 and 505. Tankers berth at quay numbers 503 and 504 with depth of water alongside 36 ft. MLW, and quay number 505 depth of water alongside 26 ft. MLW.

DENSITY: 1007. No tides, but slight variations in accordance with prevailing currents.

FRESH WATER: Available for quay connections.

FUEL: Bunker fuel delivered from pipe-lines. No advance notice required. Any grade available.

FIRE PRECAUTIONS: Standard procedures apply.

GANGWAY/DECK WATCHMEN: Watchmen generally at Master's option.

OPENING/CLOSING HATCHES: By crew or stevedores.

CERTIFICATES:

Certificate of Nationality.

Bill of Measurements.

Bill of Health.

Deratification Certificate.

Crew List.

CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes or equivalent quantities for each person on board. Wine and/or Spirit, one bottle each member to be held out of bond.

CARGO GEAR: Usual Board of Trade Regulations valid.

IDENTIFICATION CARDS: Not needed.

CONSULS:

Belgium	Tel. 15 10 00	Netherlands	Tel. 12 09 20
Finland	,, 11 43 70	Portugal	,, 11 35 16
Germany	,, 12 75 10	Denmark	,, 12 05 20
United Kingdom	,, 12 09 20	Iceland	,, 11 00 78
France	,, 11 06 00	Norway	,, 12 06 00

REPAIRS: All kinds of deck and engine repairs can be carried out.

DRY DOCKS: Length of largest dry dock 354 ft. Depth on sill about 16 ft. One smaller dry dock.

SURVEYORS: Lloyds local agent: AB Otto Hillerstrom.

REPATRIATION: Repatriation possible, by air and by train.

AIRPORT: Kastrup 60 km., Sturup 70 km., Angelholm 30 km.

TIME: GMT plus 1 hour. No alterations.

HOLIDAYS: Official holidays 1st and 6th January, 1st May, 1st Saturday November, 25th and 26th December, plus 2 holidays for Easter, 1 holiday for Whitsun and 1 holiday for Midsummer on appropriate dates.

POLICE/AMBULANCE/FIRE: Police 14 40 40; Ambulance and Fire 12 00 35; or in an emergency situation all functions via tel. 90 000.

TELEPHONES: Quay-connected telephones are placed on board.

SERVICES: Tank cleaning, discharge of tank washings, compass adjustments, etc., can be carried out after application through local Agents.

SHORE LEAVE: No restrictions.

REGULATIONS: Normal regulations apply.

DELAYS: No other delays than berths being occupied by working vessels can be expected.

AUTHORITY: Port of Helsingborg.

HOGANAS: 56.12 N. 12.33 E. (See Plan Book)

Privately-owned port serving only owning company – Hoganas AB. Customs and pilotage arranged through authorities in Helsingborg (12 nautical miles South-East of Hoganas).

DOCUMENTS: See "Stockholm".

PILOTAGE: Compulsory. Pilot obtainable at Hoganas or at Helsingborg. Pilot service day and night, available after request to pilot office at Helsingborg.

RESTRICTIONS: Entrance channel, Length 750 m.; width 65 m.; depth 8.25 m.

The harbour is seldom closed by ice.

TUGS: There are no tugs stationed at Hoganas, but tugs are available after request to the Harbour Office at Helsingborg.

BERTHING: *The Pier (Extending South-westerly).*

Length of quayage:	380.00 m.
Depth alongside:	
For 120 m. (from outer end)	6.60 m.
For the next 160 m.	8.25 m.
For remaining 100 m. varies down to	4.00 m.
The Cross Quay:	
Depth alongside at 75 m. from Northern end	3.50 m.
the remainder is unnavigable	
Quay in the middle of the Harbour:	
Length of quay:	180.00 m.
Depth alongside N.W. side:	
For 120 m. (from outer end)	6.60 m.
For the next 35 m. the depth varies from to being unnavigable.	4.2 m.
Depth alongside S.E. side:	
For 30 m. (from outer end)	5.00 m.
remainder	unnavigable

The depth of water at this port is somewhat affected by winds.

CRANES: 1×25 ton and 1×5 ton railbound electric grab cranes, 1×25 ton mobile crane.
REPAIRS: Machine-shop repairs only.
STEVEDORES: Working hours; a normal working day, Monday to Friday from 0653 to 1600 hrs. Normally no working on Saturdays.
FRESH WATER: Available.
FUEL: Can be supplied.
AUTHORITY: Hoganas AB.

37/- ?

HORNEFORS: 63.67 N. 19.54 E. (See Plan Book)

DOCUMENTS: Documents necessary are:

1 List of Bonded Stores.
2 copies Tobacco List.
3 Crew Lists.
3 Passenger Lists.

Health documents, none – if all on board healthy. In case of illness on board, this must be reported to Customs on arrival.

Copy B/L and copy Manifest.

PILOTAGE: Pilot station, Bredskar, tel. 090/45021; Pilot must be ordered 5 hours before arrival. If change in position, this must be informed at least 2 hours before arrival. Pilot can also be taken at Skagsudde Pilot station 0660/66003. (Also see "Stockholm".)
ANCHORAGES: Will be informed by Pilots from case to case.
RESTRICTIONS: Vessels over 100 m. length only taken in and out of harbour during daylight.
MAX. SIZE: Max. length 105 m. Max. draft 20 ft. 08 in. (6.3 m.).
RADIO: Harnosand Radio, 0611/12733.
TUGS: Available.
BERTHING: No particular arrival times necessary.
CRANES: 1 stationary crane, capacity 3 tons.
STEVEDORES: Labour must be ordered latest 1430 hrs. day before commencement loading, and if such day is Monday labour to be ordered before 1100 hrs. Saturday.
MEDICAL: No special regulations. Hospital and doctors available day and night.
TANKERS: 8-in. connections.
FRESH WATER: By pipe, 2 t.p.h.
FUEL: No fuel available in port. Must be ordered from Holmsund.
GANGWAY/DECK WATCHMEN: Not compulsory, but can be arranged.
OPENING/CLOSING HATCHES: Normally done by ship's crew.
CERTIFICATES:

Lighthouse dues (receipts).
Oil Record Book.
Deratisation Exemption Certificate.
Nationality Certificate.
Ship's Register (International form).
For open/closed ships – Freeboard Certificate.

CUSTOMS ALLOWANCE: Tobacco: 200 cigarettes man/week or 250 grams of tobacco man/week. Wines/Spirits, 1 bottle of wine and 1 bottle of spirits man/week. Note: age must be 21 years before crew member is allowed to have spirits or wines.
IDENTIFICATION CARDS: Not necessary.
CONSULS: None.
REPAIRS: No facilities available.
REPATRIATION: No facilities for crew changes.
AIRPORT: 25 km. from port. Served by domestic services Linjeflyg, flights to Stockholm 6 times a day.
TIME: GMT plus 1 hour; no changes during year.
HOLIDAYS: Christmas Eve; Christmas Day; Second day after Christmas; New Year's Eve; New Year's Day; Easter Friday; Saturday and Sunday; Midsummer Eve and Midsummer Day; Whitsunday; Epiphany (1st May); Ascension Day; The Day of All the Saints (1st weekend November).
POLICE/AMBULANCE/FIRE: Tel. 90 000.
TELEPHONES: None available for placing on board.
AUTHORITY: Norrlands Skogsagares Cellulosa AB.

HUDIKSVALL (including Iggesund and Stocka): 61.44 N. 17.07 E. (See Plan Book)

PORT LIMITS: Vessel is considered to be an "arrived vessel" when berthed alongside quays in port or if berths not available, at anchor in inner roads, outside berths, but not when vessels, owing to darkness, etc., are anchored outside pilot stations or in outer fairways.
DOCUMENTS: If arriving direct from foreign port, following documents presented to Customs officer who embarks during office times (0800–1700 hrs.).

3 Crew Lists.
2 Tobacco Lists.
Deratification Certificate (not over 6 months old).
Certificate of Nationality.
Certificate of Tonnage.
2 Manifests covering incoming cargo.
Receipts of Light Dues, paid to Swedish authorities during year.

PILOTAGE: Hoelick Pilot Station 61° 37′ N.; 17° 28′ E. Open for ordering pilots every day 0530–2100 hrs. local time. VHF Channel 16, after contact – working Channel VHF 13. Pilot to be ordered 5 hours before arrival. If ordered before 2100 hrs., vessel can obtain Pilot also during hours between 2100–0530 hrs. Pilot boat: orange painted cutter. International pilot signals. Pilot boards near "Myran" lightbuoy: 61° 36′ N., 17° 29′ E. Telegraphic address of pilot station at Hoelick: "Pilotstation Hudiksvall." (Also see "Stockholm".)
ANCHORAGE: Anchorage places for vessels awaiting pilot or anchoring owing to weather conditions: 61° 37.5′ N. 17° 25.0′ E.; 61° 37.0′ N. 17° 22.0′ E.; 61° 37.7′ N. 17° 21.3′ E. depending upon prevailing winds etc. Bottom mud and/or sand. Depth 10–30 m.
RESTRICTIONS: No tidal water at Hudiksvall. Tankers of more than 100 m. in length between p.p. not during darkness because of narrow channel with some curves. Dry cargo vessels up to 150 m. length after dark.
MAX. SIZE: *Tankers:* Daylight 45,000 d.w.t. Length 210 m., draft 9.2 m. After dark 6,000 d.w.t, length 100 m., draft 7.5 m.

Other Vessels: 16,000 d.w.t., length 160 m., draft 8.7 m.

Low water between 0.2–0.5 m. may occur often, sometimes as much as 0.7 m. below mean water level. Low water periods may occur when N.W. winds blowing over Northern Sweden.

HEALTH: Pratique automatic. No doctor visits incoming vessels if not specially ordered for treatment on board, etc.
RADIO: Vessels coming from South and having not yet passed the Stockholm area are recommended to call Stockholm Radio – VHF Channels 25 or 28 for vessels between Gotland/Sweden, 24 outside Stockholm South, 28 Stockholm East and North, 23 North of Aalands Sea, and in Gefle Bay, Hernoesand Radio SAH Channels 25 Hudiksvall area, 24 Sundsvall area, 23 Hernoesand area, 28 Oernskoeldsvik area. Hudiksvall harbour office: Channel 16. Working Channel 9.
TUGS: Tug compulsory for tankers over 6,000 tons d.w. and for other vessels over 8,000 tons d.w. in fairway. Vessels met near isle of "Enbarsskar" at 61° 39.5′ N., 17° 17.0′ E. For mooring purposes tug compulsory for tankers over 6,000 tons d.w. and for other vessels exceeding 5,000 tons d.w. Ship's lines used. Ice-breaking tug *Ago*, 203 tons, 1,260 EHK available in Hudiksvall during the whole year.
STEVEDORES: Ordered 1600 hrs. on day preceding vessel's arrival. For loading starting Monday morning, gangs to be ordered before 1100 hrs. local time Saturday. 3–5 gangs available at Hudiksvall and Iggesund; Stocka 3 gangs. Working hours: Monday-Friday, 0700–1600 hrs.; Meal hours: 0900–0930, 1230–1300. 2 hours overtime at extra cost of 50% Monday, Tuesday, Thursday, Friday (1600–1800 hrs.). For completing vessel, further 3 hours Monday, Tuesday, Thursday, Friday (1800–2100 hrs.). Extra cost of 100%. For completing vessel 5 hours' overtime can be obtained on Wednesday (1600–2100 hrs.), 2 hours at 50% and 3 at 100% extra.

On Saturdays no normal work, but stevedores available for maximum eight hours work, but 100 per cent overtime has to be paid and for minimum five hours even if vessel working less than five hours on Saturdays.

BERTHING: Main berth Hudiksvall draft allowed at mean water 8.7 m. alongside 165 m., thereafter 5.4 m. alongside 30 m. and therefore 4.9 m. alongside 160 m. One Ro/Ro ramp draft allowed 8.7 m. at mean water.

Pier at Iggesund 7.4 m. draft allowed mean water 150 m. length of pier. Ro/Ro berth 17.4 m. draft if more than 12 m. from Ro/Ro berth, if less draft allowed 6.3 m. Ro/Ro berth II 7.4 m. draft allowed if more than 12 m. from berth, if less 6.7 m.

Pier of Stocka 110 m. length, draft allowed mean water 4.9 m. On Southern side of pier draft allowed 3.9 m. alongside 48 m.

TANKERS: One berth only. Draft allowed: 9.2 m. at mean water. Pipe diameter for fuel: 10 in. light oils: 8 in. Connecting hoses between pipes and vessel: 8 in. diameter, both types. Shore tanks lie about 100–200 m. from berth, 5–8 m. above sea. Surface of jetty about 2 m. above sea level.
DENSITY: Average 1002–1001.
FRESH WATER: Fresh water available all berths. Delivery capacity about 15–20 t.p.h. During Winter it is difficult to arrange hoses, vessels assist with own hoses.
FUEL: Available all berths. Delivered by tank-lorries from Sundsvall 50 miles North of Hudiksvall. 24 hours' notice required.
FIRE PRECAUTIONS: No special precautions. Within bounded area oil jetty smoking prohibited. Also on new quay outside sawmill.
GANGWAY/DECK WATCHMEN: Available in all ports, not necessary if not required by vessel.
OPENING/CLOSING HATCHES: By crew.
CUSTOMS ALLOWANCE: Crew over 18 allowed 200 cigarettes; one bottle of spirits out of bond. If vessel stays in Swedish ports but still in foreign traffic, above quantities obtained from bond once a week (every 7 days). Instead of spirits one bottle wine or 6 bottles export beer.
IDENTIFICATION CARDS: Not needed. If crew going to doctor or to hospital preferable has passport.
CONSULS:

Country	*Address*	*Tel. Office*	*Tel. Home*
Denmark	Marknadsgatan 1 Hudiksvall	0650/11 712	0650/10 983
Finland	Varvsgatan 2–4 Hudiksvall	0650/15 250	0650/10 056
Gt. Britain	Drottninggatan 48 Gefle	026/18 03 00	
West Germany	Skeppsbroplatsen Sundsvall	060/15 55 00	060/15 24 40 060/62 22 2

REPAIRS: Small engine and deck repairs. To be ordered through vessel's Agent or through stevedoring foreman onboard.
DRY DOCKS: None.
REPATRIATION: Possible.

AIRPORT: Nearest regular airport: "Midlanda", near Sundsvall, 60 miles North of Hudiksvall. Regular Swedish inland airlines. Regular flights to Swedish main airports.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: No work on following days, although not all legal holidays. New Year's Day; Epiphany; Good Friday (Easter); Easter Eve; Easter Monday; Labour Day; Ascension Day; Whitsun Eve; Whit Monday; Midsummer Eve; Midsummer Day; All Saint's Day; Christmas Eve; Christmas Day; Second Christmas Day; New Year's Eve.
POLICE/AMBULANCE/FIRE:

Police Hudiksvall	0650/15 600	,, 90 000
Police Iggesund	0650/20 820	,, 90 000
Ambulance Hudiksvall	0650/10 670	,, 90 000
Ambulance Iggesund	0650/10 670	,, 90 000
Fire Hudiksvall	0650/10 670	,, 90 000
Fire Iggesund	0650/20 329	,, 0650/20 812
Doctor Hudiksvall	0650/17 370	,, 90 000
Doctor Iggesund	0650/70 026	,, 90 000
Hospital Hudiksvall	0650/92 000	
Hospital Iggesund	0650/92 000	

For Stocka: as Hudiksvall.
TELEPHONES: At Stocka and Iggesund: no telephones available for connecting onboard. At Hudiksvall telephones available. Skr 25 per day plus cost of calls.
GENERAL: Hudiksvall port is very near town. Railway station, bus station, etc., very near port. Oil port about 700 m. from town.
SERVICES: No tank cleaning or discharge of tank washings. Compass adjusting: 0650/10 339 (Pilot office). Ordered through Agent.
PORT REGULATIONS: Speed limit: max. 5 knots within the harbour basin. As plastic pipe is laid out on the bottom around the oil berth, anchoring during berthing is prohibited. Pipe filled with compressed air after vessel's mooring, comes up to the surface forming ring around vessel and oil jetty as shelter against oil leakage.
DELAYS: During Winter (December–April) delays on berthing/sailing owing to ice in fairways and alongside quays. Special mooring delays will occur owing to ice between vessel and quay.

KALMAR: 56.40 N. 16.20 E. (See Plan Book)

DOCUMENTS: See "Stockholm".
PILOTAGE: Compulsory for vessels carrying dangerous cargo. Pilot may be ordered on VHF, Channel 16 or by telephoning 0480/10719. Approaching from North, Pilot boards at Skaggenas or Krongrundet, from the South at Tradgardsgrundet. Round-the-clock service provided. (Also see "Stockholm").
ANCHORAGE: Good anchorage outside port available.
MAX. SIZE: Largest vessel 25,000 tons deadweight, draft 24 ft. Channel and harbour depth 26 ft.
TUGS: Available, order by tel. 15775.
RADIO: Stockholm Radio.
VHF: Harbour Master on VHF Channel 16.
CARGO HANDLING FACILITIES: 3 portable electric cranes of 5 tons each, 3 mobile cranes of 23 tons each and 1 mobile crane of 18 tons. 1 floating crane available, maximum lifting capacity 75 tons.
STEVEDORES: Available weekdays 0700-1630 hrs. Overtime is worked Saturdays and eves of public holidays. The operations comprise work on board, work ashore and rough sorting.
TANKERS: Oil dock has depth of 26 ft. alongside and has dealt with partly loaded ships of 25,000 tons. Discharge capacity about 28,000 cubic ft. an hour.
MEDICAL: Hospital available.
FRESH WATER: Available from wharves.
FUEL: Bunkers available by barge or at Oil dock.
DEVELOPMENTS: Ro/Ro berth will be erected 1981 at Barlastholmen. (Depth about 21 ft.)
Store houses for general cargo and sawn timber about 7,000 sq.m. will be erected 1979.
GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: Crew or stevedores.
CUSTOMS ALLOWANCE: 200 cigarettes plus 1 bottle spirits.
CONSULS:

Danish Vice-Consulate	tel. 14719.
Finnish Consulate	tel. 10700.
The Netherlands Vice-Consulate	tel. 14444.
Norwegian Vice-Consulate	tel. 22330.
German Consulate	tel. 21769.

REPAIRS: Available. Divers for underwater repairs; major repairs undertaken.
DRY DOCKS: 2 floating docks. 1 for vessels up to 3,000 d.w.t. and 1 for vessels up to 10,000 d.w.t. also slip for vessels up to 850 tons. (AB Kalmar Varv 0480/15390, telex 43100).
AIRPORT: Ten kilometres from the port.
AUTHORITY: Harbour Master.

KARLSBORGSVERKEN (Kalix District): 65.48 N. 23.17 E.

Axelsvik (Oil Harbour) 4 miles East.
PILOTAGE: Pilot station "Erikoren", Karlsborgsverken. Pilots embark or disembark at Maloren 18 nautical miles South Karlsborgsverken.
MAX. SIZE: Max. draft entrance to Karlsborgsverken 6 m., to Axelsvik 8.8 m. Size no limit.
TUGS: Available.
BERTHING:

	Max. draft.	Length of quay
Cellulose Quay	6.0 m.	145 m.
Sulphate Quay	5.0 m.	80 m.
Timber Quay	6.0 m.	250 m.
Kalix Outer Harbour Quay	5.4 m.	145 m.
Axelsviks Oil Harbour	8.8 m.	60 m.
Tore (17 nautical miles)		
N.W. Karlsborgsverken	6.0 m.	170 m.

STEVEDORES: Available, No particular ETA advice required except as normally sent by Master to the Agent.
MEDICAL: Hospital and dental services available.
FRESH WATER: Available at all berths except at Axelsvik's Oil Harbour.
OPENING/CLOSING HATCHES: Usually carried out by the vessel's crew.
FACILITIES: No land cranes. Mobile cranes to hire for loading/discharging.
CONSULS: None.
REPAIRS: Workshop available for repairs.
AIRPORT: Lulea 85 km. from Karlsborgsverken.
TIME: GMT plus 1 hour.
POLICE/AMBULANCE/FIRE: Telephone 90000 for emergency and ask for service required.
TELEPHONES: Available at quays.
SHORE LEAVE: Allowed.
AGENT: Kalixspedition, Svanberg & Co. AB, Box 61, S-952 01 Kalix Telex No. 8311.

KARLSHAMN: 56.10 N. 14.52 E. (See Plan Book)

DOCUMENTS:
- 3 Crew Lists (IMCO Forms).
- 3 Passenger Lists.
- 2 Tobacco Lists.
- 2 Store Lists.
- 1 Manifest.
- 1 Bill of Lading.

PILOTAGE: Vessels approaching port call on VHF Channel 16, Karlshamn Pilot station 5 hours in advance. Pilot boat orange coloured. Lights and sound signals as international regulations. Pilot boat always located 2 nautical miles South from Pilot station Ortholmen, this point marked on charts. Location of anchorage in same area where Pilot taken. (Also see "Stockholm").
ANCHORAGE: Depths of water in anchorage area about 20–25 m.
RESTRICTIONS: Tankers not allowed to enter during darkness. Max. draft for tankers 32 ft. 06 in.
MAX. SIZE: Max. length 180 m., max. draft 32 ft. 06 in. Oil pier outside main harbour, Kolo harbour, length unlimited, max. draft 41 ft. No tide.
HEALTH: If infectious disease on board Captain must immediately send information to Agent.
RADIO: Karlskrona Radio.
RADAR/VHF: The Pilot station is fitted with radar and VHF.
TUGS: 3 tugs available, 3,000 h.p., 2,000 h.p and 800 h.p. Join vessels about 1 nautical mile outside Harbour boundary. Ship's lines always used.
BERTHING:
Inner Harbour: West Harbour Area.

Berth	*Length (m.)*	*Depth (m.)*
Ocean Quay	150	10.0
Soja Quay	250	8.5
West Quay	400	7.5–6.0

These quays are served by 5 rail-bound bulk goods cranes of 5–10 tons and have 2 railway tracks.

Via the West Harbour area oil seed plants, copra and vegetable oils for the Karlshamn Oil Factory (AKO) are shipped as well as timber, pig iron, scrap and other bulk goods.
East Harbour Area.

Berth	*Length (m.)*	*Depth (m.)*
East Pier	160	8.5
East Quay	500	6.0

The East Pier, is equipped with 2×6.7-tons rail-bound unit goods cranes and served by 2 railway tracks. Adjacent to the East Pier are 2 cold stores with a total floor area of 7,000 sq.m.

Loading and discharging is carried out with mobile cranes at the East Quay. The Harbour has 7 mobile cranes with lifting capacities ranging from 4 to 23 tons.

Goods shipped via the East Harbour area include timber products, timber, bulk goods and general cargo.
Sterno Harbour:
A special harbour for stone products, wood and timber. Water depth is 6 m.

Stone blocks are loaded at a special quay and crushed stone products, chiefly diabase which is used for producing mineral wool, are discharged from a quay by a newly-erected stone-crushing plant. The crushing plant is owned by Armerad Betong-Vagforbattringar.

At Sterno Harbour a timber-floating terminal consisting of an 80-m. long quay and timber landing areas both on land and in the water have been arranged and leased to Mo och Domsjo AB. The timber is floated from Karlshamn to MoDo's pulpmill at Husum.

The quays of the old shipyard are used chiefly for shipping timber. Timber Terminalen AB have built a timber terminal with a sawmill, planing mill and sorting plant adjacent to the quay area.

Stilleryd Harbour:
Karlshamn's new outer harbour; it was inaugurated in 1975 and consists of a 400-m. long quay with water depths of 8 and 10 m. Dredging to a depth of 11 m. is planned at the 10-m. quay. 2×35-ton luffing cranes are used for loading and discharging vessels and they are backed up by mobile cranes. Double railway tracks serve the quay.

The harbour also has ro-ro facilities with a water depth of 8 m. Stilleryd Harbour accommodates vessels of up to 35,000 d.w.t. The harbour area features 3 warehouses with a total storage area of 21,000 sq.m. Adjacent to the quay area is a stockyard of approximately 200,000 sq.m., of which 40,000 sq.m. is asphalted.

Sodra Skogsagarna ship products like paper pulp, paper, wood chips, pulpwood, etc. via the Stilleryd harbour. Fernstroms Granitindustrier ship stone blocks while Vikingtra AB ship wood and timber via this harbour.

CRANES: In addition to the cranes mentioned above, there is a heavy lift crane capacity 300 tons.
MEDICAL: Hospital facilities available.
TANKERS: Different lines used. From 12 to 6 in. depending on cargo to load/discharge. 3 different loading/discharging berths available. 1 at Inner Harbour 32 ft. 06 in. draft, 1 at Kolo Harbour 41 ft. draft and 1 at Oxhaga.

Kolo Oil Harbour:
Position 56° 09′ N. 14° 43′ E. Pilot boards by Laknallarna, position 56° 07′ 8″ N. 14° 53′ E. Berthing during daylight only. Max. size 250 m., draft 41 ft. 75,000 d.w.t. or 100,000 d.w.t. with part load. Depth at berth and approaches 46 ft. 2 tugs are generally used.

The pipe-line is 20 in., length 400 m. and hose connection 12 in. Max. rate, 1,500 cbm/hour (hfo). There are no ballast facilities and no clean ballast can be discharged into harbour. Vessels are allowed to clean tanks and gas free in the roads only.

Fresh water available at 20 t.p.h. by pipe-line.

Old Oil Harbour:
Situated at Sutudden where a large number of major oil corporations and manufacturing companies have their depots. Heavy and light fuel oils, diesel oil, petrol and paraffin are imported and stored here. Storage capacity amounts to approximately 180,000 cu.m. of which half consists of underground rock storage facilities.

The oil quay has a depth of 11 m. and can accommodate fully laden tankers of up to 30,000 d.w.t.

Oxhaga Oil Harbour:
Karlshamn's new oil harbour, situated at Munkahusviken where the water depth at the quay is 13 m. Underground rock storage facilities with a total capacity of 400,000 cu.m. – 200,000 cu. m. for heavy oil and 200,000 cu.m. for light oil have been constructed. Storage has been leased to manufacturing companies, municipalities and oil companies.

Oxhaga Nabb's oil harbour is used by fully laden tankers of 50–55,000 d.w.t.

An above-ground storage area for petroleum, oil and chemicals is planned for the oil harbour areas. Surveys have shown that it is possible to build additional rock storage facilities for petroleum products in the Oxhaga area.

DENSITY: 1003.
FRESH WATER: Fresh water available and delivered by hoses.
FUEL: All grades available.
GANGWAY/DECK WATCHMEN: Watchmen only necessary when tankers discharge petroleum products.
OPENING/CLOSING HATCHES: By crew.
CERTIFICATES: Certificates of Tonnage, Derat Certificate.
CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes per man/week. Wine and/or Spirits, 1 bottle per man/week.
IDENTIFICATION CARDS: Not needed.
CONSULS:
Netherlands, Tel. 10041
Denmark, Tel. 52080.
Norway, Tel. (0454) 14225
Finland, Tel. (0454) 11319.
REPAIRS: Small deck and engine repairs can be effected.
DRY DOCKS: None.
REPATRIATION: Facilities for repatriation of crew possible.
AIRPORT: Distance from airport 3 Swedish miles. 3 flights per day.
HOLIDAYS: January 1st and 6th; Easter; May 1st, 15th, 26th; June 21st; November 1st; December 25th, 26th. No work can be arranged during holidays.
POLICE/AMBULANCE/FIRE: Tel. 90 000.
TELEPHONES: Telephones on board arranged at cost of 70 Sw. Cr.
DEVELOPMENTS: An extension of Stilleryd harbour is planned. By 1980 it is expected that an additional 200-m. quay with a water depth of 8 m. will be ready for service. It is judged that quay capacity at Stilleryd harbour will be fully developed during the 1980's. Total quay length will then amount to 1,100 m.
AUTHORITY: Harbour Master.

KARLSKRONA: 56.10 N. 15.36 E.

DOCUMENTS: See "Stockholm".
PILOTAGE: Pilot is taken at Aspo. Tel. 0455/39016. (Also see "Stockholm"). Ordering Pilot between 2100–0500 hrs. contact Karlshamn Pilot station 0454/14102. Stations operating on VHF Channel 16. Pilot should be ordered 5 hours in advance. Pilot boats usually orange.
ANCHORAGE: On roadstead. Reference to nautical chart No. 821 (Swedish).
MAX. SIZE: Max. draft 9.1 m. (30 ft.).
HEALTH: See "Stockholm".
RADIO: Stockholm Radio. Karlskrona Radio.
VHF: Karlskrona Port office equipped with VHF. Channels 16, 14.
RADAR: Radar service available when entering port. Tel. 0455/25075 or 0455/50780.
TUGS: Tugs assistant available.
BERTHING: Total quay length 4,700 ft., oil terminal 400 ft., depth alongside quay 13–33 ft., oil terminal 29.5 ft. Ro/Ro Quay 23 ft.
STEVEDORES: Available. Ordered through Agents or directly 0455/10518.
MEDICAL: Advance notice to Agents desirable.
TANKERS: No specific requirements applicable on oil carriers. Two tanker berths available. Draft 7.0 and 8.5 m.
FRESH WATER: Available, customary delivery from quay-berth.
FUEL: All grades available. No advance notice required.
OPENING/CLOSING HATCHES: Normally carried out by crew.
CONSULS:
Danish Vice-Consul, Tel. 15006.
Netherlands Vice-Consul, Tel. 10926 and 12495.
REPAIRS: All types of deck and engine repairs possible.
DRY DOCKS: Largest dry dock: length 185 m., breadth 20.76 m., depth 8.80 m. Six smaller docks.
REPATRIATION: Not allowed.
AIRPORT: 30 kms. from port.
TIME: GMT plus 1 hour. Permanent.
POLICE/AMBULANCE/FIRE: Tel. 90000.
TELEPHONES: None available.
SERVICES: Compass adjusting.
AUTHORITY: Harbourmaster.

KARLSTAD: 59.23 N. 13.31 E. (See Plan Book)

PORT LIMITS: Vessel considered to be an "arrived ship" when berthed or anchored South of the Gerholmsrevet buoy in case of congestion.
DOCUMENTS: As usually required in Swedish ports.
PILOTAGE: Not compulsory. However Pilots available.
ANCHORAGES: There is a safe anchorage South of the Gerholmsrevet buoy, sand and clay.
RESTRICTIONS: There are no restrictions imposed upon entry. Vessel to give 1 prolonged blast – 1 short blast – 1 prolonged blast to call the attention of boatman.
MAX. SIZE: Vessels length, breadth and draft maximized by the locks of the Trollhatte canal (87 m. × 13 m. × 5.3 m.).
HEALTH: Documents etc. as usually required in Swedish ports.
RADIO: Gothenburg Radio.
VHF: ETA to be given to Karlstad Port Radio (0800-1600 hrs. MET)
RADAR: No port radar available.
TUGS: Two icebreaking tugs available. Ship's lines usually used.
BERTHING:

Vanerterminalen	Length	175 m.
(The Venerterminal)	Shipdraft	5.3 m.
Mobile cranes		
Styckegodskajen	Length	270 m.
(The general cargo quay)	Shipdraft	5.3 m.
Three general cargo cranes	6 tons	
Trakajen	Length	120 m.
(The wood quay)	Shipdraft	5.3 m.
Mobile cranes		
Kolkajen	Length	350 m.
(The coal quay)	Shipdraft	5.3 m.
One bulk cargo crane	5 tons	
One heavy-lift crane	28 tons	
Lambergshamnen	Length	230 m.
(The Lamberg Harbour)	Shipdraft	5.0 m.
Mobile cranes		
One heavy-lift crane	160 tons	
Inrehamnen (Inner harbour)	Disused by merchant vessels.	
Oljehamnen (Oil harbour) Each pier	70 m. Mooring space both sides	
Three jetties for handling oil, etc.	Shipdraft	5.3 m.

STEVEDORES: Modern and extensive machinery equipment. Loading/discharging can be arranged in two or three shifts.
MEDICAL: Hospital facilities available.
DENSITY: Fresh water in the port.
FRESH WATER: Delivered by hose from piping on the quay.
FUEL: All kinds of bunker oil available.
CONSULS: Danish, Norwegian and German.

REPAIRS: All kinds of deck and engine repairs possible. Slipway 2,300 tons
SURVEYORS: All major classification societies represented in nearby port of Gothenburg. Government ship surveyor situated at Karlstad.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Usually carried out by crew
CUSTOMS ALLOWANCE: As usually allowed in Swedish ports.
CARGO GEAR: Shore gear usually used.
REPATRIATION: Crew changes and repatriation can be effected.
AIRPORT: Regular domestic airlines. Several flights per day to and from Stockholm and Gothenburg.
TIME: Local time is GMT plus 1 hour.
HOLIDAYS: Cargo work can not be arranged on Christmas, New Year's and Easter day or on Good Friday.
POLICE/AMBULANCE/FIRE: Telephone number 90 000.
SERVICES: Tank-cleaning equipment and facilities for discharge of tankwashings available.
SHORE LEAVE: No restrictions.
IDENTIFICATION CARDS: Not necessary for shore leave.
REGULATIONS: Ship's propulsion machinery may not be used when ship is berthed.
DELAYS: Normally not to be expected.
DEVELOPMENTS: Number of cranes and sheds will be increased. A 35 ton container crane is to be purchasd in the near future and will be sited on the Coal Quay.
AUTHORITY: Port Manager and Port Captain, Port of Karlstad.

KLINTEHAMN: 57.23 N. 18.11 E.

Harbour is being rebuilt. Quay will then be 330 m. and depth 5 m. Depth on entrance 5.5 m.

The most unfavourable winds are South — West. The harbour is however to be considered as good and safe.

Most products are loaded/discharged with mobile cranes.

Documents needed are Nationality Certificate, Bill of Measurement, Passenger List, Crew List, Derat Certificate, Ships and Crew Declaration.

Pilot Station at Visby. Pilots have VHF and operate on Channel 16.

Bunkers and water can be obtained.

KOPING: 59.31 N. 16.00 E. (See Plan Book)

DOCUMENTS: See "Stockholm".
PILOTAGE: Via Sodertalje: Pilots obtainable for inward bound vessels from Landsort to Sodertalje and from Sodertalje to Koping; for outward bound vessels from Koping and Sodertalje. Via Stockholm: Pilots obtainable for inward bound vessels from Simpnas, Furusund, Sandhamn, Dalaro and Landsort to Stockholm and from Stockholm to Koping; for outward bound vessels from Koping and Stockholm. (Also see "Stockholm"). Harbour pilotage obtainable but not compulsory in harbour area.

Distances: Landsort – Sodertalje (nautical miles), 34; Sodertalje – Koping, (nautical miles) 69; Landsort – Dalaro, (nautical miles), 32; Dalaro – Stockholm, (nautical miles), 46; Sandhamn – Stockholm, (nautical miles), 36; Stockholm – Koping, (nautical miles), 78; Vasteras – Koping, (nautical miles), 27; Harbour Pilotage, (nautical miles), 2.

ANCHORAGES: At the "Broken" light buoy, clay bottom.
RESTRICTIONS: Ice is prevalent in lake Malaren and the inlet from the Baltic from January to March, but the entrance channel is kept open during Winter season.
MAX. SIZE: The Pilot station on Lake Malaren, Tel. 0755/30467, will give information on the max. admissible sizes of vessels. In general the following applies:

Max. Admissible	*Via Sodertalje*	*Via Stockholm*
Length	124 m.	110 m.
Breadth	17 m.	15 m.
Draft	6.8 m.	5.65 m.
Height of masts above water level	35 m.	26 m.

The figures stated for the draft are subject to variation according to the water level. The entrance fairway to the port has been dredged to a depth of 7.6 m., the width of the bottom being 60 m.

VHF: Work freq. Channel 14. Call Koping Port Radio, Channel 16.
TUGS: Available day/night.
BERTHING: Deep-water harbour. Has 529 m. of quayage with depth of 6.2–7.3 m. alongside and is equipped with three 6-tons portal cranes and four 7-tons level-luffing jib cranes, two having max. lifting capacity 11 tons. Also 80 m. cross-quay – without cranes – loading/unloading with vessels own winches. Quays are rail-connected and equipped with electricity, telephone and fresh water. About 10,000 sq.m. of concrete stockyards within reach of cranes and outside this area at short distance from cranes, space of about 25,000 sq.m. available for storage of goods. Also about 18,000 sq.m. sheds of different types in connection to quays.

Cranes well equipped with lifting devices such as grabs of different types, etc. Conveyor belts of varying length, fork trucks, trimming and other cargo handling equipment also available.

Old Harbour: Has 400 m. of quayage with depth varying from 3.6 to 4.5 m. alongside, mobile cranes are used.

Oil Harbour: A modern oil harbour (built 1969) is situated at the mouth of River Kopingsan (North side), the jetty having one outside and one inside berth with depth of 7.6 and 5.7 m. respectively.

On the North side is a new (1975) 80 m. concrete quay for grainloading vessels. Depth alongside 7.3 m.

Private Wharves: There is (on the North side) a private 120 m. concrete quay, depth 6.2 m., belonging to Messrs. Tibnor Ltd., (Iron and Steel Merchants). One 10 ton travelling portal crane available.

A private harbour, belonging to Cementa Co., is situated in the immediate vicinity of the "Deep-water harbour". There is a 110 m. concrete quay, with 7.3 m. alongside, and one 6 ton travelling portal crane and one belt conveyor available. There is also a 50 m. pier, same depth, for self-unloading (cement) vessels.

STEVEDORES: Working hours: 0700–0900, 0930–1300 and 1330–1600 hrs. (Monday to Friday). Special conditions on Christmas Eve, New Year's Eve, Easter Eve, Whitsun Eve and Midsummer Eve.

Overtime work: can usually be executed on Mondays, Tuesdays, Wednesdays, Thursdays and Fridays for 3 hours daily and 6 hours on Saturday.

GANGWAY/DECK WATCHMEN: Always available.
FUEL: Water, provisions, coal and oil obtainable.
REPAIRS: Minor mechanical, electrical and other repairs can be carried out by different local firms. Diver available.
AUTHORITY: Harbour Master.

LANDSKRONA: 55.52 N. 12.48 E. (See Plan Book)

DOCUMENTS: See "Stockholm".
PILOTAGE: Pilot available on request from Helsingborg Pilot station or from Landskrona Pilot station in daytime. 5 hours' notice required. Pilot stations and boats equipped with VHF. (Also see "Stockholm")
ANCHORAGE: Vessels of up to 10 m. draft can safely anchor North of Staffans Bank.
MAX. SIZE: Depth in channel and harbour 11 m. (36 ft.) Max. draft 10 m. Vessels up to 253 m. length have sailed from harbour.
HEALTH: See "Stockholm"
RADIO: Gothenburg Radio call sign SAG; Malmo Radio call sign SDP. The harbour office, Pilot station, Pilot boats and tug boats equipped with VHF.
TUGS: Tugs usually meet off Pilhaken lightbuoy. Ship's lines to be used.
BERTHING: Terminal for handling bulk cargoes. Rock phosphate can be discharged with a capacity of 8,000 tons per 24 hours.
MEDICAL: Medical attention and hospital facilities available.
TANKERS: No oil berth in Landskrona.
DENSITY: Density of water changes with currents.
FRESH WATER: Available from quay.
FUEL: Small quantities of fuel oil can be obtained from quay.
GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: Usually carried out by ship's crew.
CERTIFICATES: See "Stockholm".
CUSTOMS ALLOWANCE: See "Stockholm".
IDENTIFICATION CARDS: Not needed.
CONSULS:

Finnish Vice-Consulate	Tel. 0418/16020
Danish Vice-Consulate	Tel. 0418/16150
Netherlands Vice-Consulate	Tel. 0418/16020
Norwegian Vice-Consulate	Tel. 0418/77000

REPAIRS: All types of deck and engine repairs.
DRY DOCKS: Dry dock for ships up to about 25,000 tons d.w. (189 m. length). Floating dock for up to about 5,000 ton d.w.
AIRPORT: Sturup, 60 km.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: See "Stockholm".
POLICE/AMBULANCE/FIRE: Tel. 90000.
TELEPHONES: Can be placed aboard.
SERVICES: Compass adjusting.
REGULATIONS: Anchoring prohibited between and up to 50 m. from harbour lights.
AUTHORITY: Landskrona Hamnforvaltning.

LULEA: 65.35 N. 22.09 E. (See Plan Book)

DOCUMENTS: See "Stockholm".
PILOTAGE: Telegraphic address, "Pilotstation Lulea". Advance notice 5 hours. VHF Channel 16, 156.80. Pilot boat, orange with international signals. Pilot boards about 2 nautical miles West of Rodkallen for entering Germandoleden and 1 nautical mile N.E. of Farstugrundens Light House for entering Sandoleden. Location of anchorage when awaiting Pilot, West of Rodkallen and South of Farstugrunden Light House.
ANCHORAGE: Germandofjarden, 1.5 nautical miles S.E. of Larsgrundet Light House and inner roads.

MAX. SIZE: Max. draft at mean water 11.4 m. in Sandoleden and 7.5 m. in Germandoleden.
HEALTH: No special regulations.
RADIO: Harnosand Radio, call signal SAH.
TUGS: At the inner road for the ore dock, and in Sandoleden 1 nautical mile South of the coal quay and the oil terminal. Ship's lines to be used.

Two tugs of 4,200 h.p. each are available for towing and icebreaking.
BERTHING: *Deep Quay:* Length 345 m., depth 6.5 – 9 m. General cargo and wood. Two 7.5-ton cranes. Railway.

SJ-Coal Quay: Length 190 m., depth 6.9 m. Bentonite and general cargo. Two 4-ton cranes. Railway.

Cement Silo Quay: Length 50 m., depth 9 m. Cement.

LKAB Ore Quay: Length 415 m., depth 13.2 m. Iron ore. Two shiploaders of 4,000 t.p.h. each.

SSAB Quay: Length 498 m., depth 8.0 m. Iron, steel. Eight 6 – 12-ton cranes.

Coal Quay: Length 575m., depth 12.2 m. Coal, coke, iron, steel, limestone. Three 18-ton grab cranes, 35 tons with hook.
BRIDGES: When passing up to Northern side of port, notice has to be given 2 hours in advance for opening of Bergnasbridge.
STEVEDORES: Bottenvikens Stuveri AB.
TANKERS: Dia. of lines from 150 mm. up to 350 mm. 2 oil jetties depth 7.8 m. and 12.2 m. Length 20 m. and 60 m. respectively. Facilities for receiving dirty ballast. Rate 300 cu.m. per boat.
DENSITY: Fresh water, 1000.
FRESH WATER: Fresh water available at any berths.
FUEL: All grades of oil available.
GANGWAY/DECK WATCHMEN: Safety watchmen are to be on board all tankers when loading or discharging.
OPENING/CLOSING HATCHES: Stevedores.
SHIP'S CERTIFICATES: See "Stockholm".
CUSTOMS ALLOWANCE: (Tobacco) 200 cigarettes or 250 grams of tobacco for each Crew member once a week. (Wine/Spirits) 0.75 litre for each Crew member over 20 years old, once a week.
IDENTIFICATION CARDS: Not necessary.
CONSULS:

British	16329	Norwegian	13040
Danish	20240	Netherlands	12030
Finnish	10440	German	23025
France	10440		

REPAIRS: Only small engine repairs.
AIRPORT: 10 km. from port. Served by regular airlines.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: See "Stockholm".
POLICE/FIRE/AMBULANCE: Telephone 90 000.
TELEPHONES: Connections available at oil terminal, coal terminal, ore terminal and Deep Quay.
GENERAL: All ships mooring at oil terminal over 3,000 d.w.t., and ore dock have to use tugs.
AUTHORITY: Lulea Hamn.

LYSEKIL: 58.17 N. 11.26 E. (See Plan Book)

DOCUMENTS: See "Stockholm".
PILOTAGE: Pilot boards 2 miles West of Gaven lighthouse. 5 hours advance notice required. Pilot ordered by VHF Channel 16 or telephone No. 60800.
ANCHORAGES: Safe anchorages both for small and large vessels inside harbour or just outside harbour in Gullmarsfiord.
RESTRICTIONS: No restrictions night entry, except max. draft possible 30 ft. No tide.
MAX. SIZE: Maximum permissible length for berthing about 600 ft. Draft 30 ft.
HEALTH: Declaration of health only when required from Customs or for vessel coming from outside Scandinavia.
RADIO: Cable Agents giving ETA, draft, cargo and cash required via Gothenburg Radio.
RADAR/VHF: No port radar service, VHF for calling Pilot, Channel 16.
TUGS: Must be requested from Uddevalla or Gothenburg at least 1 day before arrival.
BERTHING: 3 berths available. Gullmarskajen length 600 ft. max. draft 30 ft., Grotokajen 500 ft. max. draft 22 ft. Anderssons Kav 400 ft. max. draft 18 ft. Railway on all berths.
CRANES: 5 mobile harbour cranes working all berths. Maximum capacity 40 tons. No restrictions against using ships own gear.
STEVEDORES: Ordered by Agents.
MEDICAL: Hospital in town.
TANKERS: See the port of "Brofjorden".
DENSITY: About 1027.
FRESH WATER: Available from shore installation.
FUEL: Gasoil and Diesel available.
GANGWAY/DECK WATCHMEN: Available but not compulsory.
OPENING/CLOSING HATCHES: Normally opened by crew.
CERTIFICATES: Registered Tonnage Certificate.
CUSTOMS ALLOWANCE: See "Stockholm".
IDENTIFICATION CARDS: Not required.
CONSULS: Denmark, Finland, Iceland, Norway.
REPAIRS: Small repairs possible.
HOLIDAYS: See "Stockholm".
REPATRIATION: Change of crew and repatriation possible.
AIRPORT: None.
TIME: Local time GMT plus 1 hour. Permanent.
TELEPHONE: Police, Ambulance, Fire Brigade 90000.
AUTHORITY: Lysekils Hamnforvaltning.

MALMO: 55.37 N. 13.01 E. (See Plan Book)

DOCUMENTS:

2 Crew Lists.
1 Passenger List.
2 Lists of Personal Effects (Tobacco List).
1 Declaration of Health.
2 Stores Lists.
3 Cargo Manifests.
1 Bill of Measurement.
1 Certificate of Nationality.
1 Deratisation Certificate.

PILOTAGE: Vessel applies for Pilot by telegram, by telephone or VHF (telegraphic address, Pilotstation, Malmo; tel. 115269; VHF Channel 16). Advance notice required 5 hours before pilotage to commence. Pilot boat orange-coloured cutter equipped VHF and radar. Pilot boards at Malmo roadstead. In case of bad weather vessel awaits Pilot at roadstead. (Also see "Stockholm").
ANCHORAGE: Vessels anchor about 5 cables North of fairway buoy "Roder Prick" and East of leading lights Centralhamnsrannan Nedre and Ovre, and S.W. of leading lights Malmo Oljehamn, Nedre and Malmo Oljehamn Ovre. Depth 12 to 14 m. and bottom hard clay.
RESTRICTIONS: Speed must be reduced inside breakwaters. When red flag hoisted (red lantern at night) at the N.E Dry dock pier head, indicating dock gates open, vessels may pass breakwater at min. speed. Bridge opening signal for passing from South Wharf Basin 2 long blasts, followed by 1 short.
MAX. SIZE: Max. length recommended in Oil Harbour 700 ft. on draft not exceeding 34 ft. Max. length recommended at Oil Jetty in Free Port 650 ft. on draft not exceeding 24 ft., or 600 ft. on draft not exceeding 26 ft. Max. length recommended in New Harbour is 490 ft. on max. draft 21 ft. and in Industrial Harbour 550 ft. on max. draft 26 ft. No tides.
HEALTH: Free pratique automatically granted arriving from non-infested areas. If arriving from infested areas health declaration must be presented immediately on arrival. If diseases on board suspected, vessel allowed to enter after approval City Medical Adviser, but nobody allowed on board until vessel's crew examined by doctor and after approval of medical adviser.
RADIO: Vessel can route ETA cables to Gothenburg Radio (call sign SAG or Channel 26 on VHF), open all hours. Radio stations can also be called by radio-telephone on 2182 kHz.
VHF: Port Control Office equipped with VHF (Channel 16, 12 and 14), open 24 hours a day. Masters can receive information about berthing place, present traffic and existing hazards to navigation in harbour area.
TUGS: Tugs usually meet vessels at roadstead. Ship's lines used. 4 tugs, supplied at all hours, also carry out ice-breaking.
BERTHING:

Passenger Harbour:

Berth	Length (ft.)	Depth (ft.)	Quayside Cranes		
			No.	Capacity (tons)	Range Outside Quay (m.)
301–303	1,083	10			
304–308	1,903	23.5			
401–404	1,180	16.5–19.5	1	5	12.3
405–409	1,330	16.5–19.5			
410–411	670	23.5			
412	131	23.5			

Ferry and General Cargo Harbour:

Berth	Length (ft.)	Depth (ft.)	Quayside Cranes			Remarks
			No.	Capacity tons	Range Outside Quay (m.)	
501–502	656	21				Car-ferry berth
503–504	636	23.5				Train-ferry berths
505–506	560	23.5				(2) Car-ferry berth
507–511	1,050	23.5	4	5	16.5	
512–513	656	23.5				
514	328	23.5	1	6.2	10.9	Syd-Kraft grab
515–517	836	23.5				
518–523	2,312	23.5	3	6.0	12.55	Also equipped with grabs
524–526	607	17.5				

Free Port:

Berth	Length (ft.)	Depth (ft.)	Quayside Cranes			Remarks
			No. (m.)	Capacity (tons)	Range Outside Quay (m.)	
600–604	1,970	30	5*	6–40	22–24.5	2×40 tons cranes
605–609	1,645	30	15†	2.5–6	11–21.5	
610	560	30				Oil jetty

*Also equipped with grabs
†One of them also equipped with grab

Privately owned Quayside Silos:

			Intake capacity, tons of grain per hour			
Owner	*Situation*	*Berth No.*	*From ship*	*From railway*	*From vehicle*	*Storage Capacity in tons*
AB Kvarnintressenter	South Wharf Basin	304	100	100	180	4,000
Skanska Lantmannens Centralforening upa	New Harbour, Jorgen Kocks Quay	513	50	120	210	18,000
Skanska Lantmannens Centralforening upa	New Harbour, Hull Quay	521	100	130	130	17,000
AB Carl Engstrom	New Harbour, Hull Quay	603* 520	100* 100	100	200	15,000
AB Malmo Silo	Industrial Harbour. basin I	803	60	40	90	19,000
AB Kontrolifoder	Industrial Harbour, basin I	816	50	50	50	4,000
Harald Fors & Co. AB	Industrial Harbour, basin II	901	120	60	60	8,000
AB Saltimporten	Industrial Harbour, basin II	913-914	250	60	60	20,000

*Unloading at Berth 603, Free Port, thence by conveyor belt to the silo in New Harbour

Industrial Harbour:

			Quayside Cranes			
Berth	*Length (ft.)*	*Depth (ft.)*	*No.*	*Capacity (tons)*	*Range Outside Quay (m.)*	*Remarks*
801–804	1,194	23.5				
804–805	—	29.5	5	5–8	11.7–13	
806–810	1,970	23.5	5	5–6	11.7–13	
811	387	23.5				
812–818	2,135	23.5–29.5	5	6–20	19.0–23.2	2×20 tons cranes
901–907	2,887	29.5	5	6	15.0–20.0	
908–909	788	23.5	1	6.5	14.75	Coal discharge quay at Syd-Kraft
910–918	2,148	29.5	3	6–20	19–23.2	2×20 ton cranes
930–932	560	19.5				
933	341	19.5	2	6–20	19–23.2	1×20 tons crane

12 of these cranes can be equipped with grabs

BRIDGE: Will be opened with certain exceptions 0700–1700 hrs. weekdays. May be opened other hours on request to Port Control Office.

STEVEDORES: Work in shifts from 0600 through to 0100 hrs.

CONTAINER HANDLING FACILITIES: 10 Roll-on/Roll-off ramps, 2 container berths with 40 tons capacity container cranes, 3 forklift trucks with 25–40 tons capacity.

MEDICAL: No advance notice required for medical attention. Good hospital facilities available. See also "Health".

TANKERS: The Oil Harbour in the Northernmost section of the port of Malmo, and can be reached by a special approach fairway, the Oil Harbour channel, which has a depth of nearly 37 ft. The harbour is equipped with 7 berths, 2 of these being for ocean-going tankers with modern equipment for the unloading of oils and chemicals. Water depth varies between 20 and 36 ft.

The harbour can accept fully-loaded tankers of up to 32,000 d.w.t. as well as partly-loaded ships of up to 65,000 tons.

The berths for ocean-going tankers are each equipped with 3 hydraulically manoeuvrable transfer plants for faster and more reliable unloading. A piping system leads from the berths, unloading capacity of up to 2,000 tons per transfer plant, berth and hour. Tanks and pipes can be heated from a central steam-production station used by all firms. The Oil Harbour area also contains storage tanks for liquid chemicals and solvents. There are also good possibilities for development within the area, for e.g. petrochemical industries.

Berth	*Quay Length*	*Depth*
1003	770 ft.	36 ft.
1004	770 ft.	36 ft.
1006–1007	295 ft.	19.5 ft.
1008–1009	295 ft.	19.5 ft.
1010	328 ft.	19.5 ft.

DENSITY: Average density 1010. No tide experienced.

FRESH WATER: Fresh water available all berths and delivered by private company (AB Malmo Skeppshjalp, tel. 970470.) Rate of delivery 60 t.p.h.

FUEL: All normal grades available. No special advance notice required.

FIRE PRECAUTIONS: Apart from usual non-smoking precautions, vessel discharging or loading dangerous goods of Class 1 in IMCO code required to have a fire guard on board at all times.

In Oil Harbour the shore-valve watchman also serves as fire guard.

GANGWAY/DECK WATCHMEN: Not considered necessary other than in Malmo Oil Harbour. Decision to be made by Master.

OPENING/CLOSING HATCHES: Normally carried out by stevedores on ocean-going vessels.

CERTIFICATES:

International Bill of Measurement.
Certificate of Nationality.
Deratisation Certificate.
Load-line Certificate.
Radio Certificate.
Safety Equipment Certificate.
Gear Certificate.

CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes or 40 cigars or 150 grams of smoking tobacco per week out of bond. Spirits, 0.7 litre spirits per week out of bond.

CARGO GEAR: No additional requirements.

IDENTIFICATION CARDS: Not needed.

CONSULS:

	Telephone
Belgian Consulate	93 41 00
British Consulate	12 66 35, 308 06
Danish Consulate-General	12 33 44
Finnish Consulate-General	11 77 80
French Consular Agent	773 30
Guatemalian Consulate	722 30
Icelandic Consulate-General	726 00
Italian Consulate	377 31
Jugoslavian Consulate	12 42 01, 12 42 31
Netherlands Consulate	343 77
Norwegian Consulate-General	12 35 00
Polish Consulate-General	11 82 44, 310 02
Salvadorian Consulate	15 08 60
Swiss Consular Agent	12 75 35
Spanish Vice-Consulate	338 00
Turkish Consulate-General	11 48 11
German Consulate	355 60, 355 61
Austrian Consulate	93 21 11

REPAIRS: Ship and engine repairs of all kinds, and dockings carried out by Kockums Mekaniska Verkstad, one of biggest shipyards in world. Certain kinds of repairs carried out by other firms in town.

DRY DOCKS: 2 dry docks for ships up to 25,000 d.w.t. and 1 dock with a capacity of 750,000 tons. Efficient crane equipment permits single lifts of up to 800 tons. Kockum are also large manufacturers of ship's engines, in particular MAN diesels and De Laval steam turbines.

REPATRIATION: Facilities exist for effecting crew changes and arranging repatriations.

AIRPORT: Sturup Airport, served by regular airlines, situated about 25 kms. from Port of Malmo.

TIME: GMT plus 1 hour. Permanent.

HOLIDAYS: See "Stockholm". Cargo work can be arranged on those days after agreement with Stevedore Company. Oil tankers can be dispatched all hours.

POLICE/AMBULANCE/FIRE: 90000.

TELEPHONES: Can be connected at most berths. Cost Sw. kr. 15:-/day plus actual cost of long-distance calls.

SERVICES: All services available.

DELAYS: No delays expected.

AUTHORITY: Malmo Hamnforvaltning.

NORRKOPING: 58.36 N. 16.12 E. (See Plan Book)

DOCUMENTS: 3 Customs Documents. 3 Health Documents. 3 Crew Lists. 3 Passenger Lists. 3 Manifests.

Master of ship arriving from abroad to first Swedish port has to give Maritime Declaration of Health on special form.

PILOTAGE: See "Stockholm". Ships will be received 2 nautical miles North of the lighthouse Gustav Dahlen. The Pilot must be ordered on radio, telephone or in some other way at least 5 hours before piloting to start.

ANCHORAGES: 58° 38.7' N. 16° 22.5' E. Depth 70 ft.

RESTRICTIONS: Tankers loaded with more than 10,000 tons gasoline must not move in port at night-time. Tankers over 15,000 d.w.t. will not be shifted at night-time. Pampushamnen Oil Jetty: Tankers loaded with more than 10,000 tons must not enter at night-time. Inner Harbour: Tankers loaded with more than 15,000 tons must not enter at night-time.

MAX. SIZE: Pampushamnen Oil Jetty can berth vessel of about 45,000 d.w.t. with max. draft of 32.5 ft. MLW Gastgivarehagen Oil Jetty can berth vessel with a max. draft 26.5 ft. MLW and length 600 ft. Ramshall and Tallbracken Oil Jetty can berth vessel with max. draft 26.5 ft., MLW length 580 ft., breadth 80 ft., daytime only. General cargo quay (Ohmanskajen) can berth vessel max. draft 27.5 ft. MLW and max. LOA 195 m. Dry cargo vessels of 15,000 d.w.t. or more for Ohmanskajen daylight entry only. Dry cargo vessels of 25,000 d.w.t. or more should have bridge controlled main engines. Inner Harbour can berth vessel max. draft 20.5 ft.

Largest tanker at Pampushamnen, 65,405 d.w.t. LOA 236.66 m. Also see "Tankers".

RADIO: Stockholm Radio, Tingstade radio.

RADAR/VHF: VHF radio Channel 14 and 16. No radar.

TUGS: 3 tugs available, 1,680 b.h.p., 1,265 b.h.p. and 310 b.h.p. The 2 large tugs are icebreaking. Join vessel off St. Juten 58° 38.1′ N., 16° 19.6′ E. Ship's lines to be used. All towing is carried out subject to "Scandinavian Tugowners Standard Conditions of the year 1959 revised 1974".

BERTHING: No specific requirements except at Oil Jetty Tallbacken and Ramshall, which require daylight docking and undocking.

Berths specially equipped for grain, berths equipped for containers, berth for roll-on/roll-off traffic, berths handling liquid chemicals. 4,500 m. of quayage with depths of 5–10.5 m. and 6 oil jetties.

Roll-on Roll-off berths:

One Ro-Ro berth with a fixed concrete ramp and a water depth of 9 m. Loading and discharging by shore cranes may take place simultaneously with Ro–Ro operations. Sternloading vessels port side alongside.

One Ro–Ro berth with a fixed concrete ramp and a water depth of 8 m. for Ro–Ro operations only. Sternloading vessels starboard side alongside. One Ro–Ro berth with a fixed concrete ramp adjacent to the heavy lift crane specially designed for heavy loads. Water depth 9 m.

Djuron

Grain terminal, position 58° 38′ N., 16° 20.1′ E. 160 m. long concrete pier with a water depth of 13.5 m. MLW. Travelling grainloader with maximum loading capacity 500 tonnes/hour. Max. elevation above MLW 18 m.

Braviken

Paper Mill, Holmens Bruk AB. Position 58° 38.3′ N., 16° 16.1′ E. 126 m. long concrete pier with a water depth of 9 m. MLW. Mobile cranes for loading on request. Otherwise ships gear. Roll-on/Roll-off fixed concrete ramp 20 m. wide with a water depth of 7 m. MLW. Stern loading vessels starboard side alongside.

CRANES: All cranes are owned and operated by the Port Authority. These include 26 electrical transportable quay cranes with a capacity of 4–10 tonnes, two 25 tonnes cranes adapted for 20 ft. and 40 ft. container handling which together can lift 45 tonnes, two 25 tonnes mobile cranes, one fixed heavy lift crane with a maximum lifting capacity of 320 tonnes and one 4-tonnes floating crane.

STEVEDORES: Gangs must be ordered before 1500 hrs. day before arriving.

MEDICAL: Arranged by Agent. All services available.

TANKERS: *Pampushamnen:* Pier I: Depth alongside 10.5 m. The berth is equipped with a crane for the handling of hoses and has pipe connections for all petroleum and bitumen products. Permanent gangway for the use of tankers.

Pier II: Depth alongside 10.5 m. The berth is equipped with a crane for the handling of hoses, and 3 mechanical couplings and has pipe connections for all petroleum products. Permanent gangway for the use of tankers

Pier III (coastal tonnage): Depth alongside 7.5 m. The berth is equipped with a crane for the handling of hoses and has pipe connections for all petroleum products.

Fuel oil: one 18 in. and one 16 in. pipe-lines for discharging. 2 connections with 8 in. hoses. Gas oil: 14 in. pipes with 2 connections to 8 in. hoses. Asphalt: 10 in. pipes. Kerain: 10 in. pipes with 1 connection to 8 in. hose. Gasoline: 12 in. pipes with 1 connection to 8 in. hose. Connection to bigger or smaller hoses possible through existing flange-connections.

Pipe connections for discharging ballast water are installed at all piers at Pampushamnen. Receiving of ballast water is covered by ballastage. Ballast water containing any chemical agents not accepted.

Receiving capacity during the first hour is 650 cu. m. Thereafter, 150 cu. m./hr.

Tallbacken (Shell): Depth alongside 9 m. Beam of vessels restricted to 24 m. (78 ft. 9 in.) due to passage through the Handelo drawbridge. Vessels require own gear for the handling of hoses.

3 connections for variable kinds of oil, 8 in. hose connections.

Gastgivarehagen (Gulf): Depth alongside 9 m. The berth is equipped with a crane for the handling of hoses.

4 connections for variable kinds of oil, 8 in. hose connections.

FRESH WATER: Delivered by 1 water boat of 90 cu.m.

FUEL: All grades available. Notice: daytime not necessary.

DENSITY: 1000.

GANGWAY/DECK WATCHMEN: Watchmen are not necessary. Hose-watcher required during loading and discharging.

OPENING/CLOSING HATCHES: Decided from case to case.

CERTIFICATES: International Tonnage Certificate, Derating Certificate, Trade Certificate, and Radio Safety Certificate.

IDENTIFICATION CARDS: Not needed. Crew List to be used in Oil Jetties.

CONSULS:

British	tel. 011/10 00 40	Netherlands	tel. 011/10 08 00
Danish	,, 011/10 00 40	Norwegian	,, 011/12 90 40
Finnish	,, 011/12 90 80	German (Fed.)	,, 011/12 47 15
French	,, 011/10 61 00	Uruguay	,, 011/12 03 18

Belgian V. Consul tel. 011/18 62 60

REPAIRS: Small repairs of machinery can be made. No repairs in port without permission of Harbour Master.

DRY DOCKS: None.

SURVEYORS: Authorised Surveyors available representing most P&I clubs, appointed by the Swedish Board of Shipping and Navigation.

REPATRIATION: Can be arranged.

AIRPORT: Distance from Airport "Kungsangen" about 4 miles. Daily communications with Copenhagen.

TIME: GMT plus 1. Permanent.

HOLIDAYS: All work stopped on December 24th from 1800 hrs. for 36 hours. Holidays are: New Year's Day; Twelfth Day; Good Friday; Easter Monday; May Day; Ascension Day; Whit Monday; Midsummer Day.

POLICE/AMBULANCE: These services can all be reached on telephone number 90 000.

TELEPHONES: Available at different quay berths on request.

SERVICES: Arrangements for discharging waste oil and ballast.

DELAYS: No delays normally expected.

AUTHORITY: Port of Norrkoping.

NORRSUNDET: 60.56 N. 17.10 E. (See Plan Book)

DOCUMENTS:

2 Crew Lists.
2 Provision Lists.
Passenger List.

PILOTAGE: Pilot available at Eggregrund Gavle for ships coming from South and by Soderhamn for ships coming from North. Pilot available day and night. Contact Pilots by VHF on Channel 16, 5 hours before arrival. (Also see "Stockholm").

ANCHORAGE: South Gashallan in white section of Hallstenoren light.

RESTRICTIONS: During darkness max. length 100 m. and draft 18 ft.

MAX. SIZE: Draft 21 ft. 4 in. and length 146 m.

RADIO: Stockholm Radio or Harnosand Radio.

BERTHING: Max. draft by woodpulp pier 21 ft. 4 in. and timber pier 14 ft.

TUGS: 1 tug-boat available, can be ordered from Pilot or Agent.

FRESH WATER: Available from shore installations.

GANGWAY/DECK WATCHMEN: Available for gangway.

OPENING/CLOSING HATCHES: Crew allowed to open and close.

CUSTOMS ALLOWANCE: 200 cigarettes and 1 bottle spirits per man.

STEVEDORES: Ordered by Agents. Ordinary working time, Monday-Friday, 0700–1600 hrs. To finish a vessel maximum of 3 hours' overtime can be done.

REPAIRS: Next wharf in Gavle, 40 kms. from Norrsundet. Most repairs possible.

FUEL: Delivered by truck alongside vessel on pier.

IDENTIFICATION CARDS: Not required.

TELEPHONE NUMBERS: Police 10030, 10213; Fire Brigade 10609 or 90000; Gavle Pilot 026 99110, 026 99220; Soderhamn Pilot 0270 54185, 0270 60205.

AUTHORITY: Kopparfors AB.

NYKOPING: 58.45 N. 17.02 E. (See Plan Book)

DOCUMENTS:

Tonnage Certificate.
5 Crew Lists.
2 Manifest.
1 Provisions List.

PILOTAGE: Pilot station at Havringe (58° 33′ N. 17° 19.0′ E.), about 15 miles from Nykoping. Pilot must be ordered 5 hours before arrival Havringe. (Also see "Stockholm").

ANCHORAGE: There is good anchorage at Orsbaken in a depth of 9 m. (30 ft.).

RESTRICTIONS: The dredged entrance channel from Orsbaken to Nykoping nearly 5 miles long, 98 ft. wide, has a depth of 6.0 m. (19.5 ft.) at MW.

Signal: A black ball shown on the signal mast means: Entrance prohibited, a vessel is leaving the harbour.

MAX. SIZE: Roll-on/Roll-off vessels up to 4,600 d.w.t. and length 330 ft. can enter the harbour.

Grain Quay	Max. draft 5.0 m.
North-East Quay	,, ,, 4.2 m.
South-East Quay	,, ,, 5.2 m.
South-West Quay	,, ,, 5.5 m.

RADIO: Stockholm.

TUGS: There is a diesel tug of 220 h.p. Larger tug of 1,200 h.p. can be called from Oxelosund.

BERTHING: There is 560 m. of quayage with depth from 5.3 m. to 6.0 m. (17.5 to 19.5 ft.) alongside at MW.

CRANES: There are 2×4.5 tons mobile cranes and 1×4 ton crane.
STEVEDORES: Ordered by Agents. Working hours: 0700–1600 hrs.
FRESH WATER: Available.
FUEL: All grades available.
GANGWAY/DECK WATCHMEN: Ordered by Agents but not compulsory.
OPENING/CLOSING HATCHES: Normally by crew.
CUSTOMS ALLOWANCE: Each crew member 200 cigarettes or 25 cigars or 200 grams tobacco and 1 bottle spirits.
CONSULS: V. Consulate for Denmark and Finland, tel. 0155/30600.
REPAIRS: Minor repairs can be effected.
DRY DOCKS: None.
AIRPORT: Norrkoping 80 km., and Stockholm 120 km.
HOLIDAYS: New Year's Day; Good Friday; Easter and Easter Monday; Labour Day (1st May); Whit Monday; Midsummer Day and Christmas Day.
POLICE/FIRE/AMBULANCE: Police 17100; Ambulance 90000; Fire 90000.
TELEPHONE: None available for placing on board.
SERVICES: None.
AUTHORITY: Hamnkontoret Nykoping.

NYNASHAMN: 58.55 N. 17.58 E. (See Plan Book)

OIL HARBOUR
DOCUMENTS:
2 Crew Lists, and 3 Crew Lists on Imco form.
3 copies General Declaration (form supplied on arrival).
Bill of Health.
Deratisation Certificate.
3 copies Cargo Manifest/Bills of Lading.
Tonnage Certificate.
Certificate of Nationality.
Stores and Personal Effects Declaration.
Tovalop Certificate.
RESTRICTIONS: Draft limited to 13 m. through the archipelago to the harbour.
MAX. SIZE:

Berth	*Max. Length of Vessel*	*Max. Distance Bow-manifold*	*Water Depth*
1	300 m.	140 m.	17 m.
		165 m.	15 m.
2	110 m.	60 m.	7 m.
3	250 m.	90 m.	12.5 m.
		105 m.	12.0 m.
4	120 m.	60 m.	12.9 m.
5	70 m.	—	*5.2 m.

*As far as 18.0 m. N.E. of the berth.

HEALTH: Vessels arriving from ports outside Europe must, for inward clearance, provide Customs Office with written declaration of freedom from infection. Further instructions will be issued by Customs Office when such declaration cannot be given.
RADIO: Stockholm Radio; call sign SDJ.
VHF: Channels 8, 9, 12, 13 and 16. Channels 8, 12 and 16 are portable and used during mooring operations.

Nynasoil on Channels 16, working 9 and 13.

BERTHING:

Berth No. 1: Loading arms: 3×12 in. for crude oil, 1×8 in. for bunker. Min. height of loading arms above sea level 2.5 m. Max. height of loading arms above sea level 23 m. Min. distance between connections of 2 loading arms 1.5 m.

Fresh water supply max. 15 t.p.h.

Ballast water can be pumped ashore at a max. rate of 300 cu.m. per hour.

Connection with the loading arms. Vessels usually berth starboard side alongside.

Berth No. 3: Loading arms: 1×10 in. for dirty oil. 1×10 in. for light fuel oil. 1×10 in. for gasoline. Min. height of loading arms above sea level 1 m. Max. height of loading arms above sea level 16.5 m. Min. distance between connections of 2 loading arms 1.5 m. Fresh water supply max. 15 t.p.h.

Ballast water can be pumped ashore at a max. rate of 300 cu.m. per hour. Connection with the loading arms. Vessels usually berth portside alongside.

Berth No. 2, 4 and 5: For coasters only. Jetty No. 2 and 4 are equipped with loading arms and hose connections of 6 in., 8 in. and 10 in. Jetty No. 5 hose connections only.

DENSITY: 1010.
FRESH WATER: Can be supplied from the piers. No barges.
FUEL: All grades can be supplied from the piers. No barges.
CUSTOMS ALLOWANCE: 200 cigarettes per person per week. 1 bottle of wine and spirits per person per week.
CONSULS: All consuls available at Stockholm.
REPATRIATION: Can be arranged.
AIRPORT: Nearest at Stockholm.
TIME: GMT plus 1 hour. Unchanged throughout the year.
SHORE LEAVE: No restrictions.
AUTHORITY: Nynashamnsraffinaderiet.

ORNSKOLDSVIK: 63.17 N. 18.43 E. (See Plan Book)

DOCUMENTS:
1 Crew List.
1 Passenger List.
4 Customs Documents.
1 Health Document.
1 Manifest.
1 Bill of Lading.
1 Ship's Paper.
PILOTAGE: Pilot station, Ornskoldsvik, tel. 0660/66003. 5 hours' notice. VHF Channel 16. Orange-coloured motor launch fitted with radar and VHF. International signals. Station 2 miles South Skagsudde Lighthouse. Pilots serve all ports between Umea and Harnosand, also sea Pilots and ice advisers for Gulf of Bothnia. (Also see "Stockholm").
ANCHORAGE: Ornskoldsvikfjarden 30–75 ft. Anchorage forbidden in area Raskarson-Malmon-Buron.
MAX. SIZE: Length, 700 ft.; breadth, 100 ft.; draft, 34 ft.
HEALTH: Customs Authorities give pratique on arrival from foreign ports. In case of suspected disease inform Customs and Port Authorities.
RADIO: SAH, Harnosands Radio.
RADAR/VHF: Radar service in Skagsudde Lighthouse. VHF Channel 16.
TUGS: In port, available. Ship's lines used.
STEVEDORES: Inform stevedores at latest 1530 hrs. day before gangs required, also if available space, for truck-loading in holds. Loose timber, 35 stds./gang/day. Packaged timber, 80 stds/gang/day. Board and wood pulp, 250 tons/gang/day.
TANKERS: 2 tankers berths 34 ft. and 33 ft., 6, 8 and 10 in. lines.
DENSITY: Fresh water.
FRESH WATER: From quay or boat. 60 t.p.h.
FUEL: Gas oil, light fuel, heavy fuel.
GANGWAY/DECK WATCHMEN: Watchmen available if desired.
OPENING/CLOSING HATCHES: Stevedores or crew.
CERTIFICATES: Cargo Gear Certificates.
CUSTOMS ALLOWANCE: (Tobacco), 200 cigarettes per week. (Wine/Spirits), 1 bottle per week.
CARGO GEAR: Not needed.
CONSULS: Norwegian, Danish, Portuguese, Finnish.
REPAIRS: Medium sized repairs carried out.
DRY DOCKS: None.
REPATRIATION: Available.
AIRPORT: 10 miles. 3 flights daily Northbound and Southbound.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: Cargo work can be arranged on holidays.
POLICE/AMBULANCE/FIRE: Police 10800; Fire 10400.
TELEPHONES: Cost 20 Sw. crs. to be placed on board.
DELAYS: None.
AUTHORITY: Hamnforvaltningen.

OSKARSHAMN: 57.15 N. 16.27 E. (See Plan Book)

DOCUMENTS: See "Stockholm".
PILOTAGE: Pilot boards at Furon, 6 miles East of Oskarshamn. Give ETA at least 5 hours prior arrival. VHF Channel 16. Tel. 0491/10036 (also see "Stockholm").
ANCHORAGES: South of Furon, depth 25 m.
RESTRICTIONS: Channel to Oil Harbour depth 11 m. Channel to Inner Harbour depth 8.5 m.
MAX. SIZE: Draft 34 ft. 6 in. in oil harbour; 23 ft. elsewhere.
VHF: Channel 16.
TUGS: One tug available of 1,720 h.p.
BERTHING: *Oil Harbour:* Quay length 41 m., depth alongside 12 m.

Inner Harbour: South Quay length 470 m., depth 5–7.2 m.

Bradholm Quay: Length 140 m., depth 4.8 m. Length 88 m., depth 4 m.

North Quay: Length 452 m., depth alongside up to 7.8 m.

Extensions to North Quay for 50 m. in depth of 8 m. and for length of 200 m. in depth of 8.50 m.

Shipyard Quays: Up to 8 m. depth.

Vasa Quay: at Figeholm, quay length 50 m., water depth 5 m.

BULK HANDLING FACILITIES: Roll-on/Roll-off berth for goods traffic situated at the North Quay, depth alongside 8.50 m.
CRANES: 3 Portal cranes, 10 tons capacity. 6 mobile cranes, 10–36 tons capacity. Shipyard, one crane 125 tons.
TANKERS: One berth, depth at quay 36 ft.; draft 34 ft. 6 in. Discharge lines 8 in.
FRESH WATER: At every berth.
FUEL: Available.
CERTIFICATES: See "Stockholm".
CUSTOMS ALLOWANCE: 200 cigarettes, one bottle spirits out of bond.
IDENTIFICATION CARDS: Not needed.
CONSULS: Norwegian Tel. 0491/14090; Denmark Tel. 0491/10015. Finland 0491/17010.
DRY DOCKS/REPAIRS: Dry dock length 427 ft. Capacity 30,000 d.w.t. Repair facilities available. Oskarshamn Shipyard. Tel. 0491–17080.
AIRPORT: Oskarshamn, 3 km. away, 2 flights daily to Stockholm.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: See "Stockholm".

POLICE/AMBULANCE/FIRE: Police, tel. 15090; Alarm, Police/Ambulance/Fire 90000.
TELEPHONES: Available, for connection on board.
SERVICES: Compass adjusting.
AUTHORITY: Hamnforvaltningen.

OTTERBACKEN: 58.57 N. 14.02 E. (See Plan Book)

DOCUMENTS:
2 Crew Lists.
1 Store List.
Ship's Register.
1 Manifest of Bill of Lading.
PILOTAGE: Pilotage is not compulsory. Pilot obtainable at Vanersborg.
ANCHORAGE: In the roads in depths from 16 to 19.5 ft., clay bottom, and in the bay E. of Storon from 18 to 16.5 ft., clay and sand bottom.
MAX. SIZE: All ships able to pass through the Trollhatte Canal with a max. draft of 16.7 ft. at MWL can enter the harbour.
HEALTH: No certificates required. In event of any disease or fever contact agent.
RADIO: All messages to Agent via Gothenburg Radio.
VHF: Port of Otterbacken can be reached by VHF Channel 16.
TUGS: Tugs available when icebreaking is necessary.
BERTHING: Gamla Kajen (old quay) Length of quay 374 ft. Depth alongside 13 ft.
Nya kajen (new quay) Length of quay 890 ft. Depth alongside 17-18 ft.
CRANES: One 50-ton fixed crane; two 7-ton travelling bridge cranes; two 10-ton movable diesel cranes; one 5-to 7-ton portal crane.
STEVEDORES: Provided by Speditionskontoret (Otterbacken) Ordinary working hours: From 0700 to 0900, 0930 to 1300 and 1400 to 1630.
MEDICAL: Hospital available.
FRESH WATER: Available.
FUEL: Available.
REPAIRS: Minor repairs only can be effected.
GANGWAY/DECK WATCHMEN: Available but not compulsory or necessary.
HATCHES: Opening/closing is normally carried out by the crew.
CUSTOMS ALLOWANCES: 200 cigarettes and 0.75 litres spirits for each crew member.
AIRPORT: Karlstad 90 km; Gothenburg (Torslanda) 180 km.
TIME: GMT plus one hour.
HOLIDAYS: January 1st and 6th; Good Friday; Easter Monday; May 1st; Whitsuntide; December 25th and 26th.
POLICE/AMBULANCE AND FIRE: Tel. 90000
TELEPHONES: Not possible to place telephones on board. Telephones available at harbour office.
SHORE LEAVE: After clearing inwards, crew members are allowed to go ashore without special permission.
AUTHORITY: Otterbackens Hamn A.B.

OXELOSUND: 58.40 N. 17.08 E. (See Plan Book)

PORT LIMITS: The seaward boundaries of the port is a line between the Eastern point of Ljungholmen and the ore quay. However, for ore-loading ships, a vessel is considered to be an "arrived vessel" when at anchor at the roads West of Vinterklasen.
DOCUMENTS:
4 Crew Lists (3 for Customs and 1 for Ship's Agent).
4 Passenger Lists, if passengers are not inserted in Crew List.
2 Customs Documents, showing all alcoholic liquors and tobacco, belonging to officers, crew and passengers.
2 Customs Documents, showing ship's store of alcoholic liquors and tobacco.
Health Documents, not necessary.
Manifests, at least 4 copies, normally only for general cargoes.
Bills of Lading, at least a copy if not otherwise stipulated.
Ship's Paper, Ship's Register and Deratisation Certificate, not older than 6 months.
PILOTAGE: (See "Stockholm"). Pilot station located at Havringe Lighthouse, tel. 0155/32920 or 30200. ETA required 5 hours in advance in order to avoid charge for waiting. When ships in open sea inform Pilot station over telephone, transfer over Stockholm Radio, call sign SDJ or Gothenburg Radio, call sign SAG, will be recommended. VHF Channel 16 can be used for contacting Pilot station or Pilot boat. Approaching vessel applies for Pilot when daylight with flag signal G and when dark with Pilot-light or Morse Code PT. Pilot boats orange. Ships advised to proceed by Northern inlet, where Pilot will board at Norra Krankan Lighthouse, Lat. 58° 37′ N., Long. 17° 27′ E. International requirements with respect to boarding and safety measures. Vessels awaiting for Pilot are prohibited to ride at anchor North of Lighthouse "Gustaf Dalen".
ANCHORAGES: Suitable anchorages West of Vinterklasen; clay-holding ground, depth 30–40 m., and between Beten Lighthouse and Harbour, clay-holding ground, depth 20 m. Ships are not allowed to berth until they receive orders and in the meantime they must anchor and await orders.
RESTRICTIONS: No tides. Draft not over 44 ft. 4 in. at mean water level. No other special restrictions with exception of berthing ships of and over 30,000 tons d.w.t.
MAX. SIZE: Ore loading berth: Vessels between 3,000 and 80,000 tons d.w.t. can be loaded. Depth at quay 45 ft. Berth for unloading coal, iron ore: Ships of up to 40,000 tons d.w.t. can be discharged. Depth at quay 39 ft. 4 in. Berth for general cargo: Depth at quay 32 ft. 10 in. Container terminal: Depth at quay 32 ft. 10 in. Oil pier: Oil carrier up to 80,000 tons d.w.t. can be berthed. Depth at quay 45 ft.
HEALTH: No special regulations.
RADIO: Stockholm Radio, call sign SDJ, or Gothenburg Radio, call sign SAG.
VHF: Harbour authorities and Clearance Department for ore loading ships has VHF Channel 16.
TUGS: Two modern combined tugs and ice-breakers of 1,680 and 1,260 IHP. Ship's lines to be used. Tugs normally join vessel near Beten Lighthouse, just near harbour.
BERTHING: Harbour Pilot compulsory and normally ordered by ship's Agent. No tides. Depths in harbour can vary occasionally from minus 1 ft. 6 in. to plus 1 ft. according to temporary alterations of mean water level. Ships of and over 30,000 tons d.w.t. cannot be berthed when dark.
CARGO-HANDLING FACILITIES: The port has, among other things, one ore quay equipped with a travelling ore-loader with an average capacity of 2,000 t.p.h. One quay for unloading coal, iron ore and similar equipped with two travelling cranes with a capacity of 600 t.p.h. One quay equipped for container-handling with a 35-ton travelling container crane of Paceco type. In connection with the container quay there is a 25 m. traverse ferry ramp equipped to accommodate roll-on/roll-off traffic.
STEVEDORES: No special ETA advice required. Master of ship with general cargo has to inform Agent in advance number of gangs required.
MEDICAL: Necessary for Agents to receive advance notice of required medical attention, informing Agent if doctor should meet upon ship's arrival, if ambulance is required for transport to hospital and promptness required. No special vaccination/fever certificates necessary. Hospital at Nykoping, about 8 miles from Oxelosund.
TANKERS: One tanker berth, depth at quay 45 ft. Connection to load/discharge lines, have diameter of 12 in. for products and 14 in. for heavy products. Almost all types of oils. No slop/residue/facilities.
DENSITY: 1006–1016, 75% fresh water. No tides.
FRESH WATER: Always available. Delivery through lines from quays at a rate of 10 t.p.h. Fresh water can also be delivered by tugs which have fresh-water tanks.
FUEL: All grades of heavy fuels can be delivered. At least one day's notice.
FIRE PRECAUTIONS: Watchman necessary loading/discharging gasoline.
GANGWAY/DECK WATCHMEN: When ship berthed, reliable gangway must be arranged to quay. Tankers discharging/loading gasoline must have watchmen, arranged through ship's Agent.
OPENING/CLOSING HATCHES: Normally carried out by crew.
CERTIFICATES: Usual international certificates. In order not to delay despatch, important that following certificates are available and valid: Measurement, Life-boat, Radio and Deratisation (not older than 6 months).
CUSTOMS ALLOWANCE: (Tobacco), each crew member permitted out of bond about 200 grams tobacco and 5 packets of cigarette-paper. (Wine and/or Spirits), each crew member is permitted to have out of bond 1 bottle spirits or 2 bottles of wine, if he is over 20.
CARGO GEAR: International certificates necessary. No additional requirements.
IDENTIFICATION CARDS: Not needed.
CONSULS: Denmark, Percy Tham AB, tel. 0155/30600; Finland, Percy Tham AB, tel. 0155/30600; Norway, Percy Tham AB, tel. 0155/30600.
REPAIRS: Minor repairs can be undertaken at workshop on No. 1 quay. Tel. 0155/30547.
DRY DOCKS: None.
REPATRIATION: Crew changes can be effected and necessary repatriation arranged by Agent.
AIRPORT: Arlanda 40.4 miles outside Stockholm. Distance Oxelosund–Stockholm 92.8 miles. Total distance 133.2 miles. Served by regular airlines.
TIME: GMT plus 1 hour. No alterations during year.
HOLIDAYS: General holidays on which no cargo work can be arranged: New Year's Day; Epiphany; Good Friday; Easter Monday; Labour Day; Ascension Day; Whit Monday; Midsummer Day; All Saints' Day; Christmas Day; Second Christmas Day; New Year's Eve; Whitsun Eve; Midsummer Eve; Christmas Eve.
POLICE/AMBULANCE/FIRE: Dial tel. 90 000 and ask for "Police-alarm", "Ambulance" or "Brandalarm" (Fire alarm).
TELEPHONES: Arrangements for placing telephones on board exist at berth Nos. 9.5 and 10. Cost for connection is charged per day.
SERVICES: No tank-cleaning equipment or facilities for discharge of tank-washings.
SHORE LEAVE: No restrictions.
REGULATIONS: Ice-breaking dues equal to harbour dues are charged 21st December-20th March each year.
DELAYS: Normally no delays. Modern installations for loading and discharge.
AUTHORITY: Port is owned by the railway company, TGOJ, Eskilstuna. Local Authority: TGOJ, Harbour Office.

PITEA (Incl., Haraholmen, Pitsundet): 65.19 N. 21.29 E. (See Plan Book)

DOCUMENTS:
2 Crew Lists.
2 Lists Spirits and cigarettes.
Manifests and Bills of Lading of incoming cargoes to be presented to Customs.
1 Deratting Certificate.

PILOTAGE: Pilot to be taken at Gaasoeren-Skelleftea district. Must be ordered at least 5 hours prior arrival. All VHF Channels used - also onboard pilot-boats. (Also see "Stockholm".)

Outward-bound vessels must order Pilot from Harbour Office during office hours.

Signal station at Pitsund.

ANCHORAGES: Accordance Pilots advice.

RESTRICTIONS: No entry in darkness to smaller ports in district.

MAX. SIZE: Max. size through Pitsundet draft up to 22 ft. Max. draft to Skuthamn 22 ft. and Pitea Town 17 ft. To Pitea max. about 3,000 d.w.t. No tides. Also see "Berthing".

HEALTH: No special restrictions. Diseases must be reported to Customs before entering port.

RADIO: Stockholm Radio, Hornosand Radio.

Radar and VHF on all stations. VHF also at signal station in Pitsundet – entrance to Pitea. Channel 16 only. Harbour Office, Channels 16, 9 and 13.

TUGS: Tugs available if ordered beforehand. Tugs compulsory for larger vessels. Costs for three tugs about Skr 15,000.

BERTHING: At Pitea, larger vessels berth in daylight only.

Haraholmen: Quay recently completed, length 600 m. plus Ro/Ro ramp, depth 12.5 m., max. draft 11.5 m. Quay is equipped with electricity, telephones, water and oil. Quay is very strong, capable of taking loads up to 250 tons.

Harbour is specially built for all year round traffic. Eight propeller engines are installed under the quay to keep water running and quay ice-free. Special lights are installed to assist in bad visibility.

Quay is equipped with 2 "*Asea*" cranes of 12.5 tons and 19.5 m. outreach.

STEVEDORES: Bottenvikens Stuveri AB – Pitea. Labour must be ordered latest at 1400 hrs. for morning start following day. Tariff available from Agents.

MEDICAL: All treatments available without notice.

TANKERS: Only one berth at Haraholmen. Max. draft 37 ft. 10 in. FW. No further restrictions. 3 tugs compulsory for vessels over 15,000 d.w.t.

FRESH WATER: Available by pipe and lorries.

FUEL: All grades available.

GANGWAY/DECK WATCHMEN: Not necessary but available if ordered.

OPENING/CLOSING HATCHES: Normally done by ship's crew.

CUSTOMS ALLOWANCE: (Tobacco), 200 cig./man per week. (Wine and Spirit), 1 bottle man/week. Only crew members over 18.

IDENTIFICATION CARDS: Not needed.

CONSULS: None.

REPAIRS: All types of repairs can be effected.

DRY DOCKS: None.

AIRPORT: Regular flights 9 times per day. Kallax Airport at Lulea. Distance 50 km. from port. 60 minute flight to Stockholm.

TIME: GMT plus 1 hour. No alterations during year.

POLICE/AMBULANCE/FIRE: Tel. 90.000.

TELEPHONES: Facilities for placing on board available.

GENERAL: Masters to note the signals to be given before passing Pitsundet. Master must not forget that Pilot must be taken at Gaasoeren-Skelleftea district. If Pilot on bridge all way from Skelleftea to Pitea, a distance fee is charged. Piloting from Nygraan Lighthouse (entrance Pitea) only normal fee.

AUTHORITY: Hamnkontoret Pitea, Sjofartshuset-Haraholmen.

RONNEBY: 56.10 N. 15.17 E. (See Plan Book)

DOCUMENTS:
2 Number of Crew Lists.
2 Passenger Lists.
4 Customs Documents.
1 Health Documents.
2 Manifests.
1 Bill of Lading.

PILOTAGE: Pilot is taken at Karlshamn or Aspo (Karlskrona) pilot stations. Tel. Karlshamn 0454/14102, Aspo 0455/29016. Ordered over Karlskrona Radio on 3289 kHz or by VHF on Channel 16 (156.80 mc). Pilot should be ordered 5 hours in advance. (Also see "Stockholm").

ANCHORAGE: Open roads.

MAX. SIZE: Limited by depth in fairway: 20 ft. 9 in.

RADIO: Karlskrona Radio, 2182 kc/s.

VHF: VHF call sign Ronnebyhamn, Channel 16, 12, 13.

TUGS: None, when necessary such ordered from Karlsham or Karlskrona.

STEVEDORES: ETA given to ship's Agent sufficient.

MEDICAL: Medical attention required ordered from Agents.

TANKERS: Only small tankers with max. draft 20 ft. 6 in. 1×10 in. and 1×6 in. line. No facilities for residue discharge.

DENSITY: 1000. No tide.

FRESH WATER: From water post on quay.

FUEL: Diesel oil from tank-lorries.

OPENING/CLOSING HATCHES: Performed by crew.

CERTIFICATES:
Deratisation Certificate not over 6 months old.
Certificate of Nationality.
Certificate of Tonnage.

CUSTOMS ALLOWANCE: 200 cigarettes plus 1 bottle spirits out of bond.

IDENTIFICATION CARDS: Not needed.

CONSULS: Danish Consulate, tel. 0457/10675.

REPAIRS: Minor repairs only.

DRY DOCK: None.

AIRPORT: About 6 miles from Ronneby Harbour; daily flights to Malmo, Stockholm and Visby.

TIME: GMT plus 1 hour. Permanent.

POLICE/AMBULANCE/FIRE: Police 90000; Ambulance 90000; Fire 90000.

TELEPHONES: Telephone box on Quay.

AUTHORITY: Ronneby Hamnstyrelse (Harbour Board).

SIKEA: 64.09 N. 20.59 E.
SHIPPING HAS CEASED AT THIS PORT.

SKELLEFTEHAMN: 64.41 N. 21.15 E.

DOCUMENTS:
2 Copies of Crew Lists (at Ronaskarsverken 3 copies).
List of Provisions.
Measure Bill.
Manifests and Bills of Lading.

PILOTAGE: Telegraphic address: "Pilot station. Skelleftehamn". Advance notice required, 5 hours. Contact pilot boat or pilot station on VHF Channel 16. Calling signal "Skelleftea Pilot" (pronounced – Shellefteo Pilot). Pilot motor boats usually orange. Pilot taken on board 2 miles East of Gasoren Lighthouse. (Also see "Stockholm".)

RESTRICTIONS: No tides or tidal current.

MAX. SIZE: Maximum permissible length of tanker 590 ft. in accordance to dredged basins length.

HEALTH: In case of disease or suspected disease, ship should call for medical assistance in common Swedish order.

RADIO: Stockholm Radio or Harnosand Radio. When in reach of VHF station of harbour office, at 0830–1200 hrs. and 1300–1700 hrs., or else through pilot station VHF. Call signals "Skelleftea Hamnradio" or "Skelleftea Pilot Station".

RADAR/VHF: Radar service available when entering or leaving port. Contact Pilot station (Channel 16).

TUGS: Normally meet at passage of Gasoren Lighthouse. Ship's lines should be used. Tug of 3,000 h.p. also acts as local icebreaker.

BERTHING: No special requirements. *Kage:* Depth in harbour at quay 23/20 ft.; length 609 ft. *Ronnskarsverken:* Southern quay (jetty), depth 30.5 ft.; length 394 ft. Northern quay, depth 42/19.4 ft. and length 1,814 ft. *Skelleftehamn:* North quay, depth 26/21 ft. and length of 1,300 ft. Oil Terminal, (jetty), depth 34 ft. and length 210 ft. with dredged basin of 656 ft. Orviken, depth of 12 ft. along a wooden wharf of a length of 200 ft. Siporex, quay depth 19.7 ft. and a length of 150 ft.

Ronnskarsverken. Northern quay, depth 42/19.4 ft. Bjuroklubb. Length 230 ft., depth 17.5 ft.

STEVEDORES: No stipulated ETA regulations.

MEDICAL: Available at short notice. Government hospital in town.

TANKERS: One tanker berth. Max. draft 33 ft. Diameter of discharge lines 8 in. Flanges Din 2633.

FRESH WATER: At oil terminal 25 t.p.h. Elsewhere 15 t.p.h. except at Ronnskarsverken, where fresh water delivered by road tanker.

FUEL: All usual grades available.

FIRE PRECAUTIONS: Standard.

DEVELOPMENTS: Planned to build jetty for drafts of about 42.5 ft.

GANGWAY/DECK WATCHMEN: Watchmen recommended.

OPENING/CLOSING HATCHES: Carried out by crew.

CERTIFICATES: See "Stockholm".

CUSTOMS ALLOWANCE: (Tobacco): 200 cigarettes. (Wine Spirits), 1 bottle of wine and 1 bottle of spirits.

CARGO GEAR: No additional requirements.

IDENTIFICATION CARDS: Not needed.

CONSULS: Denmark, Norway, Finland and Netherlands.

REPAIRS: Minor repairs only. Patent slip, max. size 1,000 tons displacement.

REPATRIATION: Every kind of facility for effecting changes of crew.

AIRPORT: 18 km. Regular airlines, 2 flights a day.

TIME: GMT plus 1 hour. Permanent.

HOLIDAYS: New Year's Day; Good Friday; 1st and 2nd Day of Easter; Ascension Day; 1st and 2nd Day of Whitsuntide; 1 May; Midsummer Day; and 1st and 2nd Day of Christmas. Cargo work cannot be arranged.

POLICE/AMBULANCE/FIRE: 14070, 31080; 90000; 17200.

TELEPHONES: Available for placing on board at the Northern quay in Skelleftehamn.

GENERAL: All waste to be taken to special waste containers ashore.

SERVICE: Small amounts of tank-washings can be taken ashore. Compass adjusting carried out. Tug stationed in harbour.

DELAYS: In exceptionally bad weather.

AUTHORITY: Harbour Board of Skelleftea.

SKREDSVIK: 58.25 N. 11.30 E.

Oil-harbour in the Lysekil area.

DOCUMENTS:
3 Crew Lists, on Imco form.
1 Cargo Manifest.
1 Copy Bill(s) of Lading.
1 Stores List.
1 Personal Effects List.
Derat Certificate.
Tonnage Certificate.
Certificate of Registry.

PILOTAGE: Pilot station at Lysekil, tel. 0523/60800. VHF Channel 16. Five hours' notice of ETA required. Pilot vessel is an orange-coloured motor launch fitted with radar and VHF. International signals. Pilot boards between Gaeven and Tovas Ungar, about 6 miles West of Lysekil.

ANCHORAGE: Gullmarsfiord, South-East of Lysekil, depth about 60 m.

RESTRICTIONS: Draft not to be in excess of 40 ft. on passage from Pilot to Skredsvik.

MAX. SIZE: Length 180–190 m. draft 10.0 m. No limit on breadth.

TUGS: Have to be ordered either from Gothenburg or from Uddevalla.

FRESH WATER: Can be supplied from the pier.

FUEL: Can be supplied from the pier.

CUSTOMS ALLOWANCE: 200 cigarettes and 1 bottle spirits or wine per person per week.

IDENTIFICATION CARDS: Not required.

TELEPHONES: Police 0522/14920, or 0524/10068 and 90000; Ambulance and Fire 0522/10051, or 0524/10550 and 90000.

AIRPORT: Nearest at Gothenburg.

TIME: GMT plus 1 hour.

SHORE LEAVE: No restrictions, but photographing ashore is not permitted.

AUTHORITY: OE.E.F. Skredsvik.

AGENT: Ferm & Olsson AB. Post Box 66, 45300 Lysekil. Tel. nos. 0523/14060. Telex: 42080. Cables: "Fermson" Lysekil.

SLITE, Gotland Is.: 57.42 N. 18.50 E.

DOCUMENTS:
Crew Lists.
Customs Documents
Health Documents.
Bills of Lading.
Measurement Bill.
National Certificate.
Valid Derat Certificate.
All compulsory (also see "Stockholm".)

PILOTAGE: Service centralised to main station at Visby. Service day and night. Tel. 0498/10138. 5 hours notice required VHF Channel 16 (also see "Stockholm").

ANCHORAGE: Sheltered anchorage on Inner Road with up to 8.4 m. depth of water.

RESTRICTIONS: No restrictions. Entrance possible day and night.

MAX. SIZE: Draft not to exceed 21 ft. 6 in. alongside for cargo vessels. The depth at the entrance was in May 1978 increased from 7.2 m. to 8.4 m. Depth alongside remains at 7.2 m. except for vessels berthing at Bulk cement berth where depth is 8.4 m.

HEALTH: Restrictions only if fever on board or vessel coming from a port where disease or fever in existence.

RADIO/VHF: Tingstade Radio Station, call sign SAE, VHF see "Pilotage".

TUGS: No tug available.

BERTHING: No restrictions if due notice to Port Authority given.

STEVEDORES: Notice to be given latest noon on day before arrival, order to make start next morning (unless special arrangements or agreements made).

MEDICAL: Attention by doctors-in-charge. Central hospital at Visby.

TANKERS: Pipe-line connection flange 8 in.

FRESH WATER: Available alongside quay.

FUEL: Practically all grades bunker oil available subject prior notice.

GANGWAY/DECK WATCHMEN: Not compulsory but available.

OPENING/CLOSING HATCHES: Ship's crew to open or close.

CUSTOMS ALLOWANCE: Presently 200 cigarettes per head/week. Practically no spirits allowed out of bond.

IDENTITY CARDS: Seamen's book or passport if travelling outside port area.

CONSULS: No consul representations at Slite. Nearest consuls (for Denmark, Norway, Finland, West Germany) at Visby.

REPAIRS: Only minor repairs possible.

DRY DOCKS: None.

REPATRIATION: Good possibilities for changing crew.

AIRPORT: About 40 km. to Visby Airport.

TIME: GMT plus 1 hour. Permanent.

TELEPHONE: Alarm tel. 90 000.

SERVICES: No services for tank-cleaning, tank washing, or compass adjusting.

SHORE LEAVE: Permitted.

AUTHORITY: Cementa AB.

AGENT: Atktiebolaget Rob. Myrsten, 620 30 Slite, Telex 4137 – A/S Myrsten. Cables: "Myrsten – Slite." Tel. 0498/20001/02/03. After hours 0498/20102/20021/20634.

SODERHAMN: (includes Stugsund, Langror oilberth, Sandarne factory berth and Orrskar woodchip berth.) 61.18 N. 17.05 E. (See Plan Book)

DOCUMENTS:
2 Crew Lists.
3 Bills of Lading.
3 Manifests.
1 Tobacco List.

PILOTAGE: Pilot must have 5 hours notice. Telegraphic address "Soderhamn Pilot Station", Ljusne. VHF Channel 16 for calling pilot boat and pilot station (frequency 156.8 mHz). and 13 (frequency 156.656 mHz). Pilot boat is orange. International signals to be used. Vessels can normally receive Pilot between Hallgrund and Storjungfrun. In case of bad weather or ice, Master consults Pilot for advice (also see "Stockholm").

ANCHORAGE: Lilljungfru anchorage S.W. Lilljungfrun, where depths are 15–20 m., is W. or S.W. of Norrutharet. Branthalls anchorage W. Branthall isl., depths 10–15 m.

MAX. SIZE: Langror oil berth. Breadth of entrance fairway 55–60 m. and depth 8.5 m. at mean level. Max. ship length about 170 m. at the quay.

Orrskar: Woodchip terminal, breadth of entrance fairway 110 m., depth 13 m. m.l.
Sandarne. Breadth 30 m., depth 7.2 m. m.l. 55–60 m. in unlit fairway.
Stugsund. Breadth 30 m., depth 6.2 m. m.l.
Soderhamn. Breadth 10–15 m., depth 3.7 m. m.l.

Depth varies about 1 foot below and 1 foot above m.l. Breadth given at narrowest point in fairway.

HEALTH: No special action except for suspected disease. In case of disease contact Agent for information.

RADIO: Stockholm Radio when vessels come from South and Harnosand Radio from North. Within reach Master may call Soderhamn Port Radio. Tug station is Stugsund. Tug fitted VHF, Channels 16, 13, 12.

There is a radar station at Soderhamn. Pilot station, Ljusne, and some of the pilot boats are fitted with radar.

TUGS: Normally meet large vessels at Otterhallans Lighthouse and others off quays on request. Ship's lines to be used.

BERTHING: Boatmen can be ordered by Pilots or Agents. Large ships berth oil berth only in daylight because channel not lit.

STEVEDORES: Gangs to be ordered by Agent usually at 1500 hrs. for starting next morning at 0700 hrs.

MEDICAL: Medical attendant available day and night.

TANKERS: 6-in. or 8-in. connections. Only 1 berth and max. depth at quay 8.5 m.

DENSITY: Practically fresh water.

FRESH WATER: Available in all ports. Delivered through pipe-lines on wharf. Rate: 10 t.p.h.

FUEL: Any normally used grade on request to oil company with few hours' notice.

DEVELOPMENTS: A new quay at Langror berth for general cargo will be established in a few year's time.

GANGWAY/DECK WATCHMEN: Watchmen available.

OPENING/CLOSING HATCHES: Normally carried out by crew.

SHIP'S CERTIFICATES: Traffic permission (not necessary for ports within the custom district boundaries), Nationality and Reg. Certificate (or interim Nationality Certificate), Bill of Measurement, Swedish Sailor's Roll (only Swedish ships), Foreign Nation Crew Passport, Derat Certificate (6 month), Certificate of Health.

CUSTOMS ALLOWANCE: (Tobacco), out of bond, 200 cigarettes or 100 gr. tobacco and 100 cigarettes. (Wine/Spirits), out of bond, 1 bottle of spirits, 75 cl.

CARGO GEAR: Valid cargo gear certificates.

IDENTIFICATION CARDS: Not needed.

CONSULS: Danish, French and Dutch.

REPAIRS: Minor plate-work and welding can be carried out.

REPATRIATION: Facilities exist for effecting crew changes.

AIRPORT: Nearest international airport. Stockholm.

TIME: GMT plus 1 hour. Permanent.

HOLIDAYS: No work on official holidays, but may be possible on special request. New Year's Day (1st January); Twelfth Day (6th January); Good Friday; Easter Sunday and Easter Monday; 1st May; Whit Sunday and Whit Monday; Midsummer Day; All Saints' Day; 25th December and 26th December; New Year's Eve; Easter Eve; Whitsun Eve: Midsummer Eve: Christmas Eve.

POLICE/AMBULANCE/FIRE: Police 90000 or 0270/10020; Ambulance 90000; and Fire 90000 or 0270/12249.

TELEPHONES: In Sandarne, quay telephones can be placed on board. 2 telephones.

GENERAL: There is a VHF port radio at the Port Office, Soderhamn. Working time 0800–1700 hrs. Channel 16 for call and working Channel. During the ice-breaking season the tug may be out even at night. Tug has same Channels. Soderhamn custom district includes only Stugsund. Illjungfrun Pilot also serves ports of Ala, Ljusne and Vallvik.

SERVICES: Facilities for discharge of tank-washings max. 20 tons. Tank-cleaning and facilities for discharge of tank-washings of great extent are Stockholm and Sundsvall. Compass adjusting in Stugsund berth.

REGULATIONS: Port regulations available from Agent or Port Office.

DELAYS: Fog, ice and bad weather may delay berthing. Rain and snow can delay loading and discharging of dry cargo.

AUTHORITY: Hamnforvaltningen.

SOLVESBORG: 56.03 N. 14.35 E. (See Plan Book)

DOCUMENTS: See "Stockholm".

PILOTAGE: Pilot station at Ahus, tel. 044/240027, needs 5 hours notice. Pilot station and pilot boat can be ordered by VHF Channel 16 (156, 80 mHz). Harbour office in Solvesborg can be called on same frequency. (Also see "Stockholm".)

ANCHORAGE: Roadstead to South of harbour 25 ft. deep with good holding ground.

MAX. SIZE: Depth in outer harbour 8.2 m. (27 ft.) and in inner harbour 7.5 m. (25 ft.) Recommended for ships to have 1 ft. 6 in. of water under keel. Max. length 170 m. (656 ft.) Breadth 30 m. (98 ft.). Draft 7.7 m. (25 ft.) for vessel entering harbour. Largest ships to enter harbour were 26,000 tons oil tanker with load of 16,000 tons and 30,000 ton dry cargo ship loading 5,000 tons of pulp.

HEALTH: See "Stockholm".

RADIO: Stockholm Radio and Gothenburg Radio.

VHF: Harbour Office can be reached by VHF, Channel 16 (156.80 mHz). Working frequency Channel 14 (15.70 mHz).

TUGS: Available. Ordered through Agent or directly to Harbour Office.

BERTHING: *Roll-on/Roll-off Quay:* Depth in Roll-on/Roll-off harbour 6.0 m. (19.69 ft.).

STEVEDORES: Need notice before 1500 hrs. if loading/discharging shall start at 0730 hrs. following morning, or notice before 1000 hrs. if loading/discharging shall start 1300 hrs. the same day.

TANKERS: 3 Shore-lines for oil products from oil jetty to depots. 1. 250 mm. for bunker C (2nd fuel); 2. 200 mm. for paraffin oil; 3. 200 mm. for petrol. For discharge coasters use ship's equipment. Bigger ships discharging bunker C oil use harbour's 8 in. rubber hose.

FRESH WATER: Fresh water available.

FUEL: Ordered from oil companies by ship's Agents.

GANGWAY/DECK WATCHMEN: Watchmen normally not needed. Can be ordered by ship's Agents.

OPENING/CLOSING HATCHES: Normally opened/closed by crew.

SHIP CERTIFICATES: See "Stockholm".

CUSTOMS ALLOWANCE: Tobacco: 200 cigarettes/week per head. Wine/spirit: normally 1 bottle/week.

IDENTIFICATION CARDS: Not needed.

CONSULS: Royal Danish Vice-Consulate. Railway Station Building. Tel. 0456/10115.

REPAIRS: Carried out by Solvesborgs Shipyard. Tel. 0456/10950.

DRY DOCKS: Dry dock in ship yard, 341 ft. long, 51 ft. wide at entrance, 14.5 ft. deep on sill HWOST.

Floating dock with 6,000 tons lift capacity, 476 ft. long 65 ft. wide and allows ship's draft to be 19 ft. (For ships up to about 10,000 d.w.t.).

REPATRIATION: Possible.

AIRPORT: 50 km. to Kristianstad Airport and 60 km. to Ronneby Airport. Served by regular inland airlines.

TIME: Local time is GMT plus 1 hour. Permanent.

HOLIDAYS: See "Stockholm".

POLICE/AMBULANCE/FIRE: Dial 90 000 and ask for Police, Ambulance or Fire Department.

TELEPHONES: Telephones available in Agent's offices at quay and telephone boxes.

DELAYS: Normally no delays.

AUTHORITY: Solvesborgs Hamn.

STENUNGSUND: 58.04 N. 11.49 E. (See Plan Book)

DOCUMENTS:

3 Crew Lists.
2 Passenger Lists.
1 Tobacco and/or Stores List.
1 Manifest.
1 List of Animals on Board (if any).
Access to the usual ship's papers (measurement, register, certificate, etc.).

If away from Sweden more than 15 days: Bill of Health.

PILOTAGE: Pilots board West of Skallen Lighthouse outside Marstrand. Pilots will not take big ships during darkness. Those ships must anchor and await daylight. Calling for Pilot can be made in usual manner and on VHF, Channel 16. Give 24 hours notice of ETA through Agents. (Also see "Stockholm".)

ANCHORAGE: While awaiting berth vessels anchor outside harbour N.W. of jetty. Safe anchorages everywhere, but fairway South of Galteron Lighthouse has to be avoided.

RESTRICTIONS: Large vessels daylight entry only.

MAX. SIZE: 65,000 d.w.t. Draft at berth is only limit, 12.7 m. at North side, and 11 m. at South side of jetty at mean water level.

HEALTH: No special pratique necessary. If any disease or fever suspected on board, doctor must be called on arrival. Pratique automatically granted when entering from another port in Sweden.

RADIO: Gothenburg radio.

VHF: Channel 16.

TUGS: Tugs from Gothenburg will join at bridge South of harbour. Ship's lines always used.

MEDICAL: Doctors and dentists available at short notice. Hospitals situated at Uddevalla and Kungalv, ambulances at Stenungsund.

TANKERS: 8 in. hoses at jetty. At North side of jetty tankers berth starboard side to, and at South side port side to. 4-ton crane situated on jetty but ship's derrick also used for hoses.

FRESH WATER: Supplied by hose at a rate of 25 t.p.h.

FUEL: Only available by barge from other places (i.e. Gothenburg). Bunkering only during daylight. Can be ordered at short notice.

FIRE PRECAUTIONS: Normal.

GANGWAY/DECK WATCHMEN: Watchmen from ashore necessary when telephone connected.

CUSTOMS ALLOWANCE: 200 cigarettes. 1 bottle of spirits.

IDENTIFICATION CARDS: The gate is TV-guarded. Each Crew member must carry a Passing Permission allowing passage of gate. Required number of permissions will be handed over to the Master by the Agent at ship's arrival.

CONSULS: None at Stenungsund, but at Gothenburg.

REPAIRS: Some minor repairs may be effected.

REPATRIATION: All facilities exist. Consuls at Gothenburg.

AIRPORT: Gothenburg 50 km. away. Regular airlines.

TIME: GMT plus 1 hour. Permanent.

HOLIDAYS: Tankers load and discharge all year round.

TELEPHONES: Connected on board if required. Watchmen attend calls. Fireman and alarm on jetty during whole operation.

AUTHORITY: Statens Vattenfallsverk.

STOCKHOLM: 59.19 N. 18.03 E. (See Plan Book)

DOCUMENTS:

(*a*) Crew List; normally 2 copies; for oil harbour at Loudden and Free Port, 3 copies.
(*b*) Passenger List: regular passenger services 2 copies; cruise ships (lists for cruise ships must be sent in advance to Agent for forwarding to Immigration Authorities), 2 copies.
(*c*) Customs Documents: Arrival report (form can be obtained on arrival), 4 copies.
(*d*) Quarantine Certificate or Bill of Health: Deratisation Certificate not more than 6 months old to be shown. *Note:* Additional quarantine regulations may be imposed in special circumstances.
(*e*) Manifest: 3 copies.
(*f*) Bills of Lading: 1 copy of each. Liners may be subject to other regulations with regard to (*e*) and (*f*) above.
(*g*) Ship's documents: Tonnage Certificate. Certificate of nationality.

PILOTAGE: *(Sweden General).* Applications for licensed Pilots should be made at least 5 hours before pilotage is due to commence. When making application specify name of vessel, tonnage, draft and destination. Also give estimated time for taking Pilot on board and route. If this procedure not followed, the Maritime Service cannot guarantee to supply a Pilot without considerable delay to vessel.

Preferable make application by telephone, or by radio via a coastal station or by some other method direct to Pilot station nearest point where pilotage is to begin. Also possible request Pilot by VHF (ultra shortwave) telephone to any Maritime Service Pilot station, Pilot waiting point or lighthouse which is equipped with VHF.

The Maritime Service's network of permanent VHF telephone stations has been extended to give almost complete coverage of all pilot stations and waiting points and is also operative for a number of lighthouses. The radio stations can operate on different Channels and are equipped for frequency modulation. During hours when pilot stations are open, a constant watch is kept on frequency 156.80 mc/s (Channel 16). This frequency should be used for all signals and replies – and for distress traffic. Outside these hours, normal traffic transmissions, i.e. applications for Pilots, etc. should be made on frequency of 156.65 mc/s (Channel 13) or on reserve operating frequency of 156.60 mc/s (Channel 12).

When making VHF telephone call, the type of call signal that should be sent is "Lotsarna (or pilot station) plus the name of the pilot station or the pilotage attendance".

	Arholma	*Sandhamn*	*Landsort*
Cable address	Furusund Pilot station	Stockholm Pilot station	Nynashamn Pilot station
Notice of arrival	5 hours	5 hours	5 hours
VHF Channels	6, 12, 13, 16	6, 12, 13, 16	6, 12, 13, 16
Description of pilot boat	Pilot boat on day duty flies international flag "H". Pilot boat on night duty carries lights conforming to International Regulations for Preventing Collisions at Sea, Rule No. 8.		
	33 ft. steel cutter painted red-orange	33 ft. steel cutter painted red-orange	40 ft. steel cutter painted red-orange
Calling Pilot:			
During daylight	Flag G	Flag G	Flag G
At night	International PT with morse lamp	International PT with morse lamp	International PT with morse lamp
Audible signal in reduced visibility	International PT with siren	International PT with siren	International PT with siren
	Pilot may be called by radio or VHF.		
Boarding point	At Bjorko outside outer Skerries, 2–3 n.m. N.W. or E. of Simpnasklubb	2 n.m. S.E. of Revengegrund light	2.5 n.m. S. of Oja
Anchorage for vessels awaiting Pilot	Near position stated above	Near position stated above	Near position stated above

ANCHORAGES:

	Arholma	*Sandhamn*	*Landsort*
(a) Prohibited anchorage	59° 30′ N. 19° 05′ E. 59° 45′ N. 19° 14′ E.	59° 17′ N. 18° 54′ E.	
(b) Suitable anchorages	2–4 n.m. N.N.W. of Simpnasklubb	2–4 n.m. E. and S. of Revengegrund	6–8 n.m. S.S.E. of Landsort
(c) Depth	33–38 fathoms	11–22 fathoms	11–16 fathoms

RESTRICTIONS: Very large passenger vessels and fully-loaded tankers of approx. 15,000 tons d.w.t. or over not allowed pass through Skerries during darkness. Via Landsort 40 ft. draft; via Sandhamn 36 ft. draft; via Simpnas 30 ft. draft.

Ships with gross tonnage exceeding 400 tons must proceed only with an Easterly course in Lindalssundet. Ships with gross tonnage exceeding 400 tons must not proceed through Kodjupet and Sandhamnssundet (between Sandon and Korso).

Tankers with gross tonnage exceeding 22,000 tons must be accompanied by a tug from the narrows at Dalaro and Sandhamn through the Archipelago to Stockholm and nearby ports.

Ships with a gross tonnage exceeding 400 tons, not using a Pilot, must be equipped with VHF telephone which must be continuously watched on Channel 16.

Ships with gross tonnage exceeding 1,000 tons must report entry to and exit out of the Archipelago as well as arrival to, and departure from the port, to the nearest manned pilot station.

Tankships with gross tonnage exceeding 1,200 tons carrying crude oil products, mineral oil and certain chemicals must have licensed Pilot in the passages Arholma-Stockholm; Soderhamn-Stockholm; Sandhamn-Stockholm; Landsort-Stockholm; Landsort-Nynashamn; Landsort-Sodertalje and in the Lake of Malaren.

MAX. SIZE: Via Sandhamn:
Overall length = approx. 820 ft.
Beam = ,, 100 ft.
Draft = ,, 36 ft.
Via Landsort:
Overall length = approx. 820 ft.
Beam = ,, 100 ft.
Draft = ,, 39 ft.
Via Simpnas:
Overall length = approx. 650 ft.
Beam = ,, 100 ft.
Draft = ,, 29 ft.
There are no tides.

Tankers:

Tanker Discharge Quay	*Max. safe draft*	*Max. Safe length*
Bergs Oil Harbour	38 ft. 00 in.	850 ft.
Flaxenvik	34 ft. 00 in.	600 ft.
Gashaga	32 ft. 06 in.–34 ft. 00 in.	600–675 ft.
Kvarnholmen	31 ft. 00 in.–37 ft. 06 in.	600 ft.
		No restrictions
Loudden	31 ft. 06 in.–37 ft. 04 in.	500 ft.–800 ft.
Rasta	37 ft. 06 in.	600 ft.
Stora Hoggarn	37 ft. 00 in.	700 ft.
Telegrafberget	38 ft. 00 in.	No restriction
Vartan	22 ft. 08 in.–34 ft. 00 in.	600 ft.–800 ft.

HEALTH: Vessels arriving from ports outside Europe must for inward clearance provide Customs Office with written declaration of freedom from infection. Further instructions will be issued by Customs Office where such a declaration cannot be given.

RADIO: Stockholm Radio, call sign: SDJ.

RADAR/VHF: All 3 pilot stations have radar for internal use. No harbour radar service. VHF Channels 16 and 12.

TUGS: Very large vessels may be met by tugs by special arrangement at pilot boarding point. Tugs available to special order to assist with berthing; the rendezvous usually near berth.

Rates: According to fixed tariff.

BRIDGES:

RULES CONCERNING VESSELS CROSSING SEALANE AT LIDINGO BRIDGE

In force as from 1st May 1970 until further notice. Movable part of Lidingo Bridge is opened after request for letting vessels pass through 5 minutes before full-and half-hour, in accordance with following table.

October–April: Weekdays except day before Sunday or holiday, 0825 – 1600 hrs.

May–September: Every day 0825 – 1600 hrs.

Vessels in regular traffic may pass the bridge at other times than those stated above after application to the bridgekeeper during working hours, before 1300 hrs. if the passage is to take place the same day.

The passage is free of charge.

HOURS FOR OPENING FOR MOVABLE ROAD BRIDGES OVER HAMMARBY SEALANE

Movable parts of road bridges over sealane of Hammarby opened on request for vessel unable freely to pass under the bridges, all through the year at regular hours.

BERTHING: Services of boatmen available any time day or night. *See Table overleaf.*

STEVEDORES: Stevedores available at 0700, 0930, 1100 and 1330 hrs., Stevedores required for 0700 hrs. must be booked previous day: otherwise can be booked for next starting time.

MEDICAL: Duty medical officer available all hours day or night. Tel. Stockholm 21 55 49, 11 83 31 or 20 30 91. Seamen admitted to hospital with note from Medical Officer for Seamen, but not necessary for emergency admissions. Valid certificates of vaccination must be produced. Any necessary vaccinations carried out by Medical Officer for Seamen.

TANKERS:

Tanker discharge quay	*Diameter of discharge pipe-lines* in.	*No. of tanker berths*	*Depth of water at quayside* ft. in.
Bergs oil harbour	12–20	1	43 0
Flaxenvik	12	1	35 08
Gashaga	6–12	2	34 01–35 08
Kvarnholmen	8–14	3	33 0–39 4
Loudden	6–12	4	33 02–39 00
Rasta	8–10	1	37 08
Stora Hoggarn	6–10	1	38 08
Telegrafberget	6–8	1	39 04
Vartan	8–10	3	24 08–36 00

DENSITY: Salt content of 0.5%. No variations.

FRESH WATER: Fresh water may be obtained from quayside as well as from water barges or tugs. 1,000 cu.ft. per hour can be delivered from quayside, but at Loudden max. 3,500 cu.ft. per hour can be delivered. Water supply capacity of tugs and waterboats varies up to max. of 1,750–5,250 cu.ft. per hour. Special delivery charges payable for delivery of water to tanker discharge quays outside Port area by water-boat.

FUEL: All grades bunker oil, lubricating oil, etc. can be supplied.

GANGWAY/DECK WATCHMEN: Not essential, but recommended for large tankers.

OPENING/CLOSING HATCHES: If opened and closed by stevedores, subject to extra fee.

CERTIFICATES:
Tonnage Certificate.
Certificate of Nationality.
Deratisation Certificate not more than 6 months old.
Ship's articles, crew list or similar document listing all persons signed on aboard.

CUSTOMS ALLOWANCE: Tobacco: 200 cigarettes per person per week or 200 g. (7 oz.) of tobacco per person per week. Wine and/or spirit: One bottle of spirits per person per week, one bottle of wine per person per week.

CARGO GEAR: Cargo vessels carrying goods which constitute a fire or explosion hazard or other flammable or otherwise dangerous goods must notify Port Authorities in advance the nature and quantity of goods concerned. In certain cases a red flag or red light must be carried at mast head.

IDENTIFICATION CARDS: Passport or seaman's discharge book with photograph.

CONSULS:

Algerian Embassy	211070, 214070, 214080
Argentinian Consulate	202685
Australian Embassy	244660
Austrian Embassy	233490
Belgian Embassy	118958
Brazilian Embassy	631285, 623669
British Embassy	670140
Canadian Embassy	237920
Chilean Embassy	627690
Chinese People's Republic, Embassy of the	217539
Colombian Embassy	218489
Danish Embassy	231860
– Consulate and Visa Office	208748
Ecuadorian Embassy and Consulate	100701
Finnish Embassy, Consulate and Passport Office	240270
French Embassy	630270
German Embassy (Federal Republic)	631380
Greek Embassy	608860, 617880
Hungarian People's Republic, Embassy of the	616762, 636639
Icelandic Embassy	624016, 672753
Indian Embassy	113237, 113213
Indonesian Embassy	635470
Iranian Embassy and Consulate	627068, 627368
Iraqi Embassy	639110, 639120
Irish Embassy	618005, 617409
Israeli Embassy	635240
Italian Embassy	245805
Italian Consulate	610310, 619525
Japanese Embassy	630440
Jugoslav Embassy	218436, 212824
Korean Embassy	623000, 618650
Lebanese Consulate-General	244950
Liberian Embassy	621040
Mexican Embassy	616080, 603970
Netherlands Embassy	247180
Nicaraguan Consulate-General	234195
Norwegian Embassy	760620
Norwegian Consulate-General	103699
Pakistani Embassy	678741, 678742,
Panamanian Consulate-General	511788
Paraguayan Consulate	204363

Principal Quays and harbours	*Berth Numbers*	*Length of quay feet*	*Depth of water at mean water 13 ft. from quay* ft. in. – ft. in.*	*Quay cranes** Number*	*Quay cranes** Lifting capacity tons*	*Warehouses, sheds, etc. Number*	*Warehouses, sheds, etc. Kind*	*Warehouses, sheds, etc. Notes*
On Baltic								
Stadsgardshamnen	151–167	6,332	31 3 – 18 2	10	5.0–7.5	2	Custom-buildings	
						2	Sheds	
						2	Pass. Term Buildings	
Skeppsbrohamnen	101–108	1,870	19 10 – 17 8			3	Custom-buildings	
Sodra Blasieholmshamnen		902	11 6					
Nybrohamnen	1–10	1,539	18 2 – 10 0					
Strandvagen	11–27	3,291	16 5 – 8 4					
Vartahamnen	500–507	6,827	35 9 – 21 5	10	3.0–6.0	1	Pass. Term. Bldg.	
	509–511							
	515–526							
Free Port Harbour	610–611	5,794	34 1 – 24 9	34	5.0–24.0	17	Sheds	
	620–625					7	Warehouses	
	630–638					1	Grain-silo building	Suction installation for 120 t.p.h.
	640–641							
	650–656							
Oil harbour at Loudden	701–710	3,346	39 0 – 29 2					Shore with 8 loading jetties and 1 pier
Norra Hammarbyhamnen	301–322	5,545	20 8 – 11 7	11	5.0–6.0	1	Custom-building	
				1	20.0	1	Shed	Fixed crane
Sodra Hammarbyhamnen	351–358	4,564	20 8 – 12 9	5	5.0–7.5			
	363–369							
Small wharves		1,407	29 2 – 8 2					
Total for installations on the Baltic-side		41,417		71				
On Lake Malar								
Riddarholmshamnen		230	13 3					
Norr Malarstrand	453–466	2,523	21 2 – 6 7			1	Shed	
Soder Malarstrand	10–21, 25–26	3,012	14 11 – 13 0	1	3.0			
Ballstahamnen		686	16 7 – 13 7					
Hornsbergsstrand		1,207	22 10 – 13 7	2	6.0			
Hasselbyverkskajen		948	23 2 – 13 4	1	8.0			Administered by the Energy Supply Authority
Small wharves and quays		2,231	22 10 – 9 8					
Total for installations on the Lake Malar-side		10,837		4				
Grand total		52,254		75				
Principal private quays and wharves								
On Baltic								
Inside and close to the Port of Stockholm area		4,840	42 4 – 12 2					
On Lake Malar								
Inside the Port of Stockholm area		4,305	22 10 – 13 3					

Water level		*Baltic* ft in.	*Lake Malar* ft. in.
High water highest observed	HHW	+2 0	+3 3
normal	MHW	+0 10	+1 10
Mean water	MW	−1 0	+1 0
Low water normal	MLW	−2 6	+0 6
lowest observed	LLW	−2 11	−0 4

* Different heights of the water refer to the Swedish State Measure Datum:

** Besides the quay cranes there are 2 pontoon cranes of 6–260 tons lifting capacity, the biggest one with own propelling machinery. The number of cranes is thus 77. In addition to these there are some cranes in private ownership.

Peruvian Embassy	110019, 110041
Peruvian Consulate-General	113085
Polish Embassy	114132
Polish Consulate-General	116374
Portuguese Embassy	626028
Portuguese Consulate	634555
South African Legation	243950
Spanish Embassy	625494, 616005
Swiss Embassy	231550, 217270
Tanzanian Embassy	244870
Thai Embassy	678090, 672160
Thai Consulate-General	220500
Tunisian Embassy	236470
Turkish Embassy	608066
Turkish Consular Department	672960
Union of Socialist Soviet Republics, Embassy of the	130440
– Consular Department	533732, 208652
Egyptian Embassy	629603, 629687
United States Embassy	630520
Uruguayan Embassy	603196, 603197
Venezuelan Embassy	110996, 110997

REPAIRS: All types of deck and machinery repairs can be carried out.

DRY DOCKS: Gustav V Dock, length 598 ft., width 79 ft., depth 31 ft. Also 3 other dry docks and 5 floating docks.

REPATRIATION: Crewmen may be signed-on and paid-off. Whether paid-off crewmen will be allowed to remain in the country and seek new employment, depends on existing bilateral agreements between countries. Generally, only a citizen of a Scandinavian country may seek work in Sweden without a special labour permit.

AIRPORT: Arlanda, approx. 22 miles from central Stockholm. Served by regular airlines.

TIME: GMT plus 1 hour. Unchanged throughout year.

HOLIDAYS: New Year's Day (January 1st); Epiphany (January 6th); Good Friday (variable Friday in March/April); Easter Monday (variable Monday in March/April); May 1st; Ascension Day (variable Thursday in May/June); Whit Monday (variable Monday in May/June); Midsummer Day (variable Saturday in June); All Saint's Day (first Saturday in November); Christmas Day (December 25th); Boxing Day (December 26th). No work is normally done on these days.

POLICE/AMBULANCE/FIRE: Tel. 90 000.

TELEPHONES: Ship-to-shore telephone connections can be provided at most quays.

GENERAL: Degaussing station available.

SERVICES: Electric current can be laid on at some quays. Port has a special barge for collection of oil residues. Licensed compass adjusters available.

SHORE LEAVE: No restrictions.

DELAYS: Occasionally shortage of stevedores. Some delay may be caused by ice, but port kept permanently open by ice-breakers.

AUTHORITY: Stockholms Hamn.

STORUGNS, Gotland Is.: 57.50 N. 18.48 E.

(See Plan Book)

Situated on Eastside of Bay of Kappelshamn on the North coast of Gotland.

DOCUMENTS:

Vessels arriving from foreign ports shall have the following documents:

1 Crew Manifest.
1 Stores List.
3 Crew Lists.
Tonnage Certificate.
Certificate of Nationality.
Declaration of Health (Deratisation Cert.), not older than 6 months. Not applicable to vessels from Scandinavian ports.

NOTICE OF ARRIVAL: On which the loading turn number is based, should be given when the vessel has passed Lat. 57° 52′ N. The notice can be given by VHF (Storugns harbour radio) or by telephone 0498/27160 (outside normal working hours by telephone only).

Vessels may not berth without permission of the Company.

PILOTAGE: Pilot who boards in the outer approaches and should be ordered at least 5 hours in advance by tel. 0498/27010 or 10138. Pilots keep watch on VHF Channel 16.

ANCHORAGE: With good holding ground. Vessels waiting in the roads should keep watch on VHF Channel 16 during ordinary harbour working hours.

Ships lying in the roads shall anchor so that in-going and outgoing vessels can pass without hinderance or risk. Anchoring in Kappelshamnsviken in the area between Lat. 57° 51′ N. and an E.W. line 200 m. South of the quay's Southernmost point is prohibited unless permission is obtained from the Company.

RESTRICTIONS: The harbour can be entered at all times regardless of wind direction except during strong Northerly winds.

The bay is normally ice-free. During exceptionally cold spells with Northerly winds traffic may be temporarily stopped or hindered by ice-floes.

MAX. SIZE: Depth at entrance and at quay 10 m. Vessels up to 20,000 tons have loaded to full draft. Max. draft 9.2 m.

HEALTH: No restrictions provided no disease or fever on board and vessel not arriving from port where disease or fever in existence.

RADIO: 96 and 24 hours before vessel's ETA preliminary notice must be given to the Company. Changes of ETA exceeding 10% of the remaining time must be reported. It is, however, not necessary to report changes of less than 1 hour. The Company may under special circumstances waive the obligation to give 96-hour notice.

On the arrival of a vessel in the harbour area notice of arrival must be given either in writing, by telephone 0498/27160 or by VHF radio. In respect of notice of arrival the harbour area is Kappelshamnsviken South of Lat. 57° 52′ N. If a vessel, owing to bad weather or for any other reason cannot safely lie within the harbour area, the Company may accept notice of arrival from vessel North of above mentioned latitude. At night (from 2230 to 0530 hrs.) notice of arrival can be given by telephone only (automatic answering service).

Between 0500 and 2230 hrs. vessels waiting in the roads shall keep watch on VHF radio or, if the vessel is not equipped with such, on the ordinary radio.

Coastal Radio Stations: Stockholm Radio and Tingstade Radio (Tingstade Radio, radio telegrams only).

VHF: Storugns Harbour Radio VHF Channels 16 and 9.

TUGS: Not available on the island of Gotland.

BERTHING: The harbour which is situated on the Eastern side of Kappelhamsviken is intended solely for the loading of limestone which is obtained from the nearby quarry. The Gotland limestone which is of high purity and has a very low percentage of impurities is used in cellulose, sugar, metallurgic and chemical industries, and in iron production.

The limestone is delivered in 11 different grades. The density is 2.5/2.6 tons/cu. m.

The stowage factor varies between 17 and 26 (17–18 for grades 0–3 mm., 23–26 for grades between 3 and 120 mm., and 20–24 for grades above 120 mm.).

Quay		*Length*		*Depth*
Quay 1	outside	140 m.	outside	9.5 m.
	inside	120 m.	inside	7.0 m.
Quay 2		48 m.	(no loading)	5.0 m.
Quay 3		110 m.	outer	7.0 m.
			inner	6.0 m.

Boatmen: Vessels with Pilots on board need not order boatmen. Other vessels should contact the Company well in advance. During night time boatmen can be obtained by contacting Securitas; tel. 0498/19000 not later than 2 hours before ETA.

BULK HANDLING FACILITIES: The loading elevators are movable along their respective quays. The capacity on Quay 1 is about 500–600 t.p.h and on Quay 3 about 300–350 t.p.h.

Cleaning of holds, discharging of ballast and opening of hatches shall be carried out in sufficient time to avoid delays in loading. The loading should be so planned that shifting of the vessel and loading elevators can be avoided as far as possible.

STEVEDORES: Normal working hours are Monday–Friday 0530-2230 hrs. Overtime working to complete loading is available to a limited degree, as is loading on Saturdays and Sundays. Vessels requiring overtime loading Sat./Sun. must give notice not later than Friday 1100 hrs.

During ordinary working hours vessels are loaded by turn. The turn is based upon the time of notice of arrival.

MEDICAL: Central hospital at Visby.

FRESH WATER: Not available.

FUEL: Most grades available from Visby subject prior notice.

GANGWAY/DECK WATCHMEN: Not compulsory but available.

OPENING/CLOSING HATCHES: Ship's crew open and close.

CUSTOMS ALLOWANCE: Presently 200 cigarettes per head/week. Practically no spirit allowed out of bond.

IDENTIFICATION CARDS: Seamen's book or passport if travelling outside port area.

CONSULS: Nearest consuls (for Denmark, Norway, Finland, West Germany) at Visby.

REPAIRS: Only minor repairs possible.

DRY DOCKS: None.

REPATRIATION: Good possibilities for changing crew.

AIRPORT: Visby.

TIME: GMT plus 1 hour. Permanent.

SHORE LEAVE: Permitted.

POLICE/AMBULANCE/FIRE: Dial 90 000.

AUTHORITY: Cementa AB.

STROMSTAD: 58.56 N. 11.10 E.

DOCUMENTS/PILOTAGE: See "Stockholm".

ANCHORAGE: Available within port to vessels up to and including 3,000 d.w.t.

MAX. SIZE: Cargo ships (not tankers), max. 3,000 d.w.t.

BERTHING: No particular restrictions for berthing within the port.

FRESH WATER: Available.

FUEL: None available.

GANGWAY/DECK WATCHMEN: Necessary.

OPENING/CLOSING HATCHES: Carried out by crew.

IDENTIFICATION CARDS: Needed.

CONSULS: Norwegian Consul: Karl Krohn, Adr: Karlsgatan 2.

REPAIRS: No repairs possible.

REPATRIATION: Facilities exist for effecting crew changes.

AIRPORT: Torslanda (Gothenburg). Distance: 200 km.

HOLIDAYS: Cargo work cannot be arranged on holidays.

POLICE/AMBULANCE/FIRE: Police 12530; Ambulance 90000 (ask for ambulance); Fire 11160.

TELEPHONES: Arrangements exist for placing telephones on board.

TIME: GMT plus 1 hour. Permanent.

DELAYS: No delays in load or discharge.

AUTHORITY: Hamnforvaltningen Stromstad.

SUNDSVALL: 62.25 N. 17.20 E. (See Plan Book)

DOCUMENTS:

Crew Lists 4.
Passenger Lists 4 (if passengers onboard only).
Crew Declaration on tobacco, liquer, Cigarettes and spirit etc.
Derat. Certificate.
Tonnage Certificate.
Register.
Swedish light dues.
Manifest and/or Bill of Lading.

PILOTAGE: Pilot station at Spikarna Southern point of Alno Island VHF Channel 16. For communication and instructions Channel 13.

Pilot boarding from pilot cutter 2.5 miles East of Gubben Lighthouse in position 62° 21′ N. 17° 40′ E.

Entrance passage Gubben Light – Spikarna Light – Draghallan Light all 14 m. deep.

ANCHORAGE: Between islands of Tjufholmen and Alno and also in Svartvik Bay.

MAX. SIZE: See "Berthing" and "Tankers".

RADIO: Cable Agents giving ETA, draft and Cash requirements either via Hernosand Radio SAH or Stockholm Radio SDJ. At least 24 hours notice required. Change in time to be given at least 5 hours before ETA pilot.

TUGS: Available, ordered by Agent. Compulsory at Sundsvall Oil terminal for Tankers of more than 10,000 d.w.t.

BERTHING: Around the clock berthing. No restrictions except draft. Following drafts (fresh water) accepted in Sundsvall and adjacent ports.

Essvik: 62° 19′ N. 17° 24′ E.

Length of quay 30 m. Tankers secure with mooring lines aft and anchors forward. Discharging by aft connection. Max. draft at 170 m. length – 7 m. Pilot distance 10 nautical miles. Distance from Sundsvall town 16 km.

Johannedal: 62° 25′ N. 17° 24′ E.

Length of quay 60 m. Max. draft 4.3 m. Pilot distance 13 nautical miles Distance from Sundsvall town 9 km.

Kubikenborg: 62° 22.7′ N. 17° 22′ E.

Length of quay 150 m. Max. draft 10.5 m. 1 shorecrane, capacity 5 tons. 1 suction-installation, capacity 100–150 t.p.h. Pilot distance 12 nautical miles. Distance from Sundsvall town 4 km.

Norra Nyhamn: 62° 20′ N. 17° 24.8′ E.

Length of quay (pierhead only) 8 m. Tankers to be secured aft and drop both anchors forward. Discharging aft-connection. Max. draft, along the quay, 10 m. Pilot distance 6 nautical miles. Distance from Sundsvall town 18 km.

Ortviken: 62° 23.8′ N. 17° 21.8′ E.

Oil Berth: Length of quay 140 m. Max. draft at max. 200 m. length – 10.8 m. Pilot distance 12 nautical miles. Distance from Sundsvall Town 4 km.

Ostrand: 62° 29′ N. 17° 21′ E.

Salt Berth: Length of quay 75 m. Max. draft 5 m. (port side alongside). 1 shore crane, capacity 5 tons.

Glaubersalt Berth: Length of quay 40 m. Max. draft 5.4 m. 1 shore crane, capacity 4 tons.

Oil Berth: Tankers berthed outside 3 timber rafts, max. draft 5.5 m. Pilot distance 17 nautical miles. Distance from Sundsvall town 15 km.

Soraker: 62° 30.5′ N. 17° 30′ E.

Length of quay 170 m. Max. draft 7.0 m. 1 shore crane, capacity 10 tons. Pilot distance 11 nautical miles (East of the island Alno). Pilot distance 20 nautical miles (West of the island Alno). Distance from Sundsvall town 34 km.

Stockvik: 62° 20′ N. 17° 22′ E.

Length of quay 140 m. Max. draft 7 m. 3 shore cranes, capacity 6 tons each. Pilot distance 10 nautical miles. Distance from Sundsvall town 9 km.

Sundsvall Town Quay: 62° 23.5′ N. 17° 19.5′ E.

Berths 7–8:	Length of quay 240 m.	Max. draft 6.7 m.
Berths 11–12:	Length of quay 240 m.	Max. draft 7.8 m.
Berth 13:	Length of quay 90 m.	Max. draft 6.7 m.
Berths 14–15:	Length of quay 65 m.	Max. draft 6.5 m.
Berths 16–17:	Length of quay 110 m.	Max. draft 5.0 m.
Berth 32:	Length of quay 109 m.	Max. draft 4.0 m.
Berth Mokajen:	Length of quay 50 m.	Max. draft 4.0 m.

1 shore crane, capacity 3 tons, working in Berth 32. Cargo to be handled by mobile cranes. Pilot distance 12 nautical miles.

Sundsvall Oil Berth: (Vindskarsudde) 62° 23.2′ N. 17° 21.8′ E.

Length of quay 100 m. Max. draft 11.3 m. 3 swinging arms, each of 10 in. dimension. Pilot distance 12 nautical miles. Distance from Sundsvall town 3 km.

Svartvik: 62° 19′ N. 17° 22′ E.

Length of quay 140 m. Max. draft at 100 m. length – 7 m. 1 shore crane, capacity 4 tons.

Oil Berth: Tankers berthed outside 3 timber rafts. Max. draft at 170 m. length – Forward 6.9 m., Aft 9.1 m. Pilot distance 10 nautical miles. Distance from Sundsvall town 11 km.

Tunadalshamnen: 62° 25′ N. 17° 23′ E.

Length of quay 450 m. Max. draft 9.2 m. 2 shore cranes, capacity 10 tons. Additional berth: Length of quay 230 m. Max. draft 12.6 m. Pilot distance 13 nautical miles. Distance from Sundsvall town 7 km.

Tunadal Sawmill: 62° 25′ N. 17° 23′ E.

Length of quay 195 m. Max. draft at 80 m. length – 7 m. Pilot distance 13 nautical miles. Distance from Sundsvall town 7 km.

Vivstavarv: 62° 29′ N. 17° 28′ E.

Length of quay 180 m. Max. draft 7.3 m. Pilot distance 17 nautical miles. Distance from Sundsvall town 18 km.

MEDICAL: First class medical attention and dental care available.

TANKERS: See "Berthing".

STEVEDORING:

Ordinary working hours Monday-Friday 0700-1600 hrs.

5 hours overtime may be worked to complete cargo. Saturdays 0700-1530 hrs. minimum of 5 hours at double time. 2 hours may be worked to complete cargo.

CRANES: 2 cranes available 10 ton. In Sundsvall City cargo is handled by mobile cranes. Also see "Berthing".

CUSTOMS ALLOWANCE: See "Stockholm".

DENSITY: Nearly fresh, 1005.

FRESH WATER: Supplied at all berths.

FUEL: All grades delivered. Notice must be given in good time, since these installations normally close down weekends.

SHIP WATCHMEN AND SHIP'S TELEPHONE: Available. Compulsory at Oil terminals only.

CONSULS: Finland, Norway, Denmark, Germany, Great Britain, Holland, Belgium, France, Iceland.

REPAIRS: Most repairs possible through local repair shops.

DRY DOCKS: Lunde Varv outside Kramfors.

AIRPORT: International airport 22 km. outside town. Good facilities to effect repatriation.

TIME: GMT plus 1 hour permanent.

HOLIDAYS: See "Stockholm".

POLICE/AMBULANCE/FIRE: Dial 90 000.

GENERAL: *Dangerous Cargo:* Ships carrying dangerous cargo must notify Port authorities in advance of nature, quantity and Imco code number of goods concerned.

Wintertime: Ice-breaker service available if needed. Wintertime November to April.

AUTHORITY: Sundsvalls Hamnforvaltning.

TRELLEBORG: 55.21 N. 13.09 E. (See Plan Book)

DOCUMENTS: See "Stockholm".

PILOTAGE: Available day and night. Meet inward-bound ships on roads with motor boat. Outward-bound Pilot obtained from Pilot station of Trelleborg. Tel. 10141. Pilots also attend warpings and hawser-moorings. Pilot boats provided with short-wave radio telephone, and in Pilot station an up-to-date radar set is installed. Also see "Stockholm".

ANCHORAGE: Recommended West of entrance fairway between fairway buoy and No. 1 light buoy. Depth varies from 7–14 m. Anchor ground good – clay and sand.

RESTRICTIONS: Entrance a straight, perch-buoyed fairway of about 1,300 m. length, having measured depth of 8.5 m., and a bottom width of 100 m. Distance between moles (outer – 125 m.) and (inner – 86 m.)

HEALTH: See "Stockholm".

TUGS: Tug-boats can be promptly obtained from Malmo.

BERTHING: New Harbour has depth of 8 m. with quay on Northern side of basin. It is 1,640 ft. long and served by one bridge crane (6.2 tons) and one gantry crane (5 tons), also one mobile crane. Western harbour basin has depth of 7 m. in Western and Northern part and 8 m. in Eastern part. The Western part is served by a 5 ton bridge crane. Eastern harbour basin has depth of 6.5 m. in Eastern and Northern part and 8 m. in Western part. Oil quay 230 ft. long has depth at quay of 8 m. is situated on Southern side of New Harbour. Tankers of max. length 570 ft. can approach this quay. From oil harbour area direct importation of oils is made to Svenska Fina, Statens Jarnvagar (the Swedish State's Railway Company), the Trelleborgs Gummifabriks AB (Trelleborg Rubber Factory Ltd.). Five berths equipped for Ro/Ro traffic.

STEVEDORES: Available (tel. 112 66,112 69).

FRESH WATER: Available on all quays at request in Harbour Office.

FUEL: All grades bunker oils supplied at oil quay through direct pipe-line from sea depot. Order on phone Trelleborg 107 76. Bunker coal can be ordered via the harbour office.

REPAIRS: Available through private firms. Tel. Trelleborg 150 60, 109 66 or 124 50.

CONSULS: Denmark, Finland, Norway and West Germany.

TIME: GMT plus 1 hour. Permanent.

TELEPHONES: Ship's telephone available at oil quay, tel. 148 28, and at the Harbour Bridge, tel. 147 67. Order is made through Harbour office.

SERVICES: Divers available through the Harbour office. Refuse containers can be hired.

AUTHORITY: Trelleborgs Hamnforvaltning, Trelleborg Harbour Authority.

UDDEVALLA: 58.21 N. 11.56 E. (See Plan Book)

DOCUMENTS:

3 Crew Lists.

3 Passenger Lists.

Health Document. Derat. Certificate when ship arrives from abroad, except from Denmark, Norway and Finland.

3 Manifests.

2 copies of Bills of Lading.

Tonnage Certificate.

Nationality Certificate.

1 Crew Effects Declaration.

2 Ships Stores Declaration.

1 Declaration of Living Animals (if any).

PILOTAGE: Pilotage at Marstrand. Address "Marstrand Pilotstation". Required ETA 5 hours. VHF 16 and 6. Pilot boat South of Pater Noster Lighthouse. (Also see "Stockholm".)

MAX. SIZE: Draft 11 m.

HEALTH: Cable to Agent and he will arrange with health authorities.

RADIO: SAG. Gothenburg Radio (Goteborg Radio).

RADAR/VHF: No port radar service, VHF Channels 16 and 14.

TUGS: 5 Tugs up to 5,000 h.p. available. Can be ordered through Pilot or Agent.

BERTHING: Depths alongside (at M.W.) as follows:

	Depth
Skeppsholm Quay	10.5 m.
Bado Quay	7.0–9.5 m.
Bave Quay	7.0 m.
Skans Quay	5.5 m.
Thule Quay	4.5 m.
Juno Quay	7.0 m.

CARGO-HANDLING FACILITIES:

Skeppsholmspiren: 5 electric cranes of 12 to 25 tons capacity. This berth is especially constructed to handle the loading/unloading of bulk cargoes ore, coal, coke, scrap iron etc. Very large storage areas. berth equipped for Ro/Ro traffic.

Bado Quay: 8 electric cranes with capacities of 7–12 tons. 7,000 sq.m. of warehouses and 9,000 sq.m. of storage.

Bave Quay: 2 electric cranes with capacities of 6 tons. 3,000 sq.m. of warehouse and 14,000 sq.m. of storage.

Grain Cargoes: 2 silos owned by private companies.

STEVEDORES: Arranged by Agent.

TANKERS: Draft in the Skeppsviken Oilport, 11 m.; at the Bado Oilport, 9.5 m.

FRESH WATER: Available at all quays.

FUEL: All grades available.

FIRE PRECAUTIONS: Watchmen necessary when loading or discharging oils in pipe-lines.

GANGWAY/DECK WATCHMAN: Watchman accepted by Harbour and Fire Authorities on vessels loaded with explosives.

OPENING/CLOSING HATCHES: Preferably by crew. Can be arranged by stevedores.

CERTIFICATES: Tonnage Certificate, Nationality Certificate; Derat Certificate.

CUSTOMS ALLOWANCE: 200 cigarettes and 1 bottle of spirits for each man as a normal quantity. Possible to be increased for Master.
IDENTIFICATION CARDS: Not required.
CONSULS:

Danish	Tel. 151 91	Norway	Tel. 910 00
Finland	,, 161 00	Holland	,, 168 60
	388 60		168 90
West Germany	,, 360 00		

REPAIRS: Facilities available.
REPATRIATION: In accordance with instructions of Consul.
AIRPORT: Gothenburg, 100 km.
TIME: GMT plus 1 hour. Permanent.
POLICE/AMBULANCE/FIRE: Police, 90 000; Ambulance, 90 000; Fire 90 000.
TELEPHONES: Available for placing on board.
SERVICES: Compass adjusters and Ship's chandler available.
SHORE LEAVE: No restrictions.
DEVELOPMENTS: Bado Quay – A new warehouse of 4,500 sq.m.
AUTHORITY: Harbour Manager, Port Authority of Uddevalla.
AGENT: Anders Smith Shipping AB, Bavebacksgatan 19, P.O. Box 31, S–451 01 Uddevalla 1. Telex: 42044 Smith S. Tel: 0522-36280, after hours Tel: 0522-13013. Cables: "Andsmith Uddevalla".

UMEA: 63.49 N. 20.16 E. (See Plan Book)

DOCUMENTS:
Ship's Documents:
Tonnage Certificate.
Certificate of Nationality.
Deratisation Certificate (not older than 6 months).
Supplied by Master on arrival:
1 copy of each Manifest.
1 copy of each Bill of Lading.
Supplied by Agent and signed by the Master on arrival from foreign ports:
1 Maritime Declaration of Health.
3 Crew Lists (one set).
2 Passenger Lists (one set).
1 Crew Effects Declaration.
2 Ship's Stores Declarations.
2 Cargo Declarations.
4 Reports of Arrival.
1 Declaration of Living Animals (if any) (supplied by the Customs Officer).
Furthermore on arrival from any port:
1 Report of Arrival, with double net tons, if applicable (Harbour Office).
1 Passenger List (if any in transit).
1 Crew List.
On departure to a Foreign Port:
5 Reports of Departure.

PILOTAGE: Umea Pilot Station: Bredskar. Tel. 090-45021 and 090-45544. Telegraphic address "Pilotstation Umea".

At least 5 hour's advance notice of ETA at Pilot station, stating time and Pilot station and destination, can be given over any Swedish coastal radio station or free of charge on VHF over any Swedish Pilot station and some lighthouses.

Pilot station and pilot boats fitted with VHF Channel 16 – calling and safety; Channel 13 – pilotage and traffic; Channel 12 – spare Channel.

All pilot boats orange with flag "H" and equipped with radar.

Boarding point, 63° 36.5′ N. 20° 25.5′ E., 0.5 nautical miles South of Vaktaren Lighthouse. In case of bad weather, in the fairway, closer to the Pilot station.

Anchorage for vessels awaiting Pilot: 63° 36′ N. 20° 28′ E., 1.5 nautical miles S.E. of Vaktaren Lighthouse. Depth 18 to 30 m.

ANCHORAGES: See "Pilotage".

Osterfjarden roadstead between Umea Uthamn and Obbola. Length about 2,800 m. and about 400 m. wide, midstream in River Umea. To the North and South of 63° 42.3′ N. 20° 21.0′ E. and with a depth of 12 to 22 m.

Anchorage is forbidden around position 63° 40.5′ N. 20° 20.0′ E. Cables and fresh water pipe-line on Osterfjarden roadstead passing East-West around Lat. 63° 42.5′ N.

RESTRICTIONS: Entry permitted during darkness, for tankers, not more than 13,000 d.w.t. and a max. draft of 7.62 m., and dry cargo vessels with a draft not exceeding 8.53 m.

During unsuitable weather conditions, according to the Pilot on duty.

Tankers exceeding 1,600 g.r.t. and with a cargo of mineral oil products and other dangerous cargoes, must take a Pilot.

MAX. SIZE: Max. depth and max. permissible draft (at MW) in the fairway as follows:

The fairway to:	*Maximum draft (m.)*
Ferry Station No. 1-2	7.5
Ferry Station No. 3 Oil Berth	10.2
Stormskar Berth No. 1-10 and Obbla	10.2
Holmsund Oil Jetty	5.5
Umea Inner Harbour and Gimonas Oil Jetty	3.0

No tide.

HEALTH: Free pratique automatically for ships arriving from non-infected areas. In event of any suspected disease or fever on board notify the Agent, who will give necessary directions. It is possible to send a telegraphic message to "Sanitary Authority, Umea" containing state of health on board, in ordinary items or code. (Also see "Documents".)

RADIO: Harnosands Radio (SAH) on 2182 k/Hz or on VHF Channel 23-26 or 28 (depending on ship's position).

Port radio: Umea port radio keeps watch, Monday to Friday, 0815 to 1630 hours on VHF Channel 16. Working Channels 11 and 13. At other times Umea Pilot station. No port radar service, but Umea Pilot station and the pilot boats are equipped with VHF and can assist on request.

TUGS: Normally necessary only for larger tankers when berthing. Tugs join vessels just off the jetty. Ship's lines always used.

BERTHING: Depth alongside (at MW) as follows:

Umea Outport:	*Depth in metres*
Ferry Stations:	
No. 1 Hillskar	6.0
No. 2 Hillskar	7.0
No. 3 Truthallan	7.0
Oil Berth, Stormskar	11.0
Pilot Berth	5.3
South Quay, Berth Nos. 9 to 10	11.0
Pier Quay, Berth Nos. 7 to 8	9.0
Pier Quay, Berth No. 7	7.0
North Quay, Berth Nos. 2 to 6	7.0
North Quay, Berth Nos. 1 to 2	6.0

CRANES:
North Quay: 5 cranes, 2–7.5 tons.
Pier Quay: 3 cranes, 3–7.5 tons.
South Quay: 1 crane of 40 tons.

TANKERS: Oil berth at Umea Outport.

Stormskar, Depth 11 m. Reducing pieces for all diameters between 6 in. and 12 in. and all types of flanges available. One crane for handling hoses.

Obbala: Oil Jetty, depth 11.0 m.

DENSITY: Nearly fresh water.

STEVEDORES: Holmsunds Stuveri AB. Tel. 090-40970. To be ordered before 1300 hrs. local time, day before gangs required. For work on Saturdays, Sundays, and holidays, special regulations.

Working hours: Monday–Friday 0600 to 1500 hrs., meal hour 1000 to 1100 hrs. Coffee breaks 0800–0810 hrs.; 1300–1310 hrs.

MEDICAL: All kinds of medical attention and hospital facilities available. Notify Agent as soon as possible.
FRESH WATER: Delivered from water posts in Umea Outport at Ferry Station No. 1, oil berth, Berth Nos. 1–10 and in Umea Inner Harbour.
FUEL: All kinds and grades of fuel oil available in Umea Outport. Bunkering at Berths 1–10 possible during normal loading or unloading from pipe-line. At ferry station Nos. 1 and 2 and the oil berth also bunkering from pipe-line. Fuel can also be delivered from lorries. Notice as soon as possible.
FIRE PRECAUTIONS: Security watchmen from port of Umea while alongside the oil berth. Alarm regulations in writing will be delivered on arrival.
GANGWAY/DECK WATCHMAN: Available but not compulsory except for tankers.
OPENING HATCHES: Can be done by stevedores if necessary, except patent hatches.
CUSTOMS ALLOWANCE: *Tobacco:* 200 cigarettes or 250 grammes of tobacco (7 ozs.)

Spirits and Wine: 1 bottle of each (1 litre), minimum age 20 years.

Above mentioned quantities are per crew member and per week in Sweden. After a week quantities are taken out after request to the Customs Office.

IDENTIFICATION CARDS: Not required. Seaman's book sufficient.
CONSULS: Following countries have representatives in Umea: Denmark, Finland, Netherland, Norway.
REPAIRS: Most deck and engine repairs.
REPATRIATION: Facilities exist for effecting crew changes and arranging repatriations.
AIRPORT: Umea, approx. 20 km. away, served by regular airlines.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: New Year's Day (1st Jan.); Twelfth Day (6th Jan.); Good Friday; Easter Monday; May Day (1st May); Whit-Sunday; Whit-Monday; Midsummer's Day (nearest Saturday to 24th June); All Saints' Day (1st Sat. in November); Christmas Day; Boxing Day.
POLICE/AMBULANCE/FIRE: Alarm central 90-000 and ask for service required.
TELEPHONES: Available for placing on board at berths 1-10. and oil berth at Stormskar.
AUTHORITY: Port of Umea.

VALLVIK: 61.11 N. 17.10 E. (See Plan Book)

DOCUMENTS: See "Stockholm".
PILOTAGE: Pilot station at Lilljungfrun. For further information, see "Port of Soderhamn". (Also see "Stockholm".)
ANCHORAGE: *(a)* Ljusne bight sheltering for W., N. to N.E. winds, depths 6 to 8 fathoms. *(b)* North side of Storjungfrun island sheltering for S. to S.W. winds, depths 10 to 12 fathoms.
RESTRICTIONS: No direct restrictions. Ships of about 5,000 tons d.w.t. or more are recommended not to enter or leave the harbour in darkness (due to pilot and weather conditions).

MAX. SIZE: Max. draft in fairway 25 ft. 6 in. Loading pier 650 ft., available on both sides (West side up to 320 ft. only) *Depths:* East side, from 28 ft. at the outer end to 18 ft. at the inner, with max. breadth 50 ft., breadths more than 50 ft. allow only 23 ft. 5 in. abreast of the pier. West side, from 28 ft. at the outer end to 20 ft. at the inner, max. breadth 50 ft.

HEALTH: No special action except if suspected disease. In that case contact Agent.

RADIO: Northward bound ships contact Stockholm Radio, Southward bound Harnosand Radio.

RADAR/VHF: No port radar service. There is a radar station at Lilljungfrun. Pilot station and some of the pilot boats are fitted with radar. Master may contact Pilot by means of VHF Channel 16 (frequency 156.8 mHz) and 13 (frequency 156.656 mHz).

TUGS: Usually only needed when ships are leaving. Ship's lines always used.

BERTHING: Ship's Agent keeps contact with port authorities.

STEVEDORES: Agent arranges needed or available gangs according to the Shipmaster's wishes.

TANKERS: 10 in. diameter discharging hoses and pipe-line. Tanker berth at loading pier, 3 different connecting points.

FRESH WATER: Delivered by hose from quay. Rate about 8 t.p.h.

FUEL: Tanker lorries ordered through Agent, available with a few hours' notice.

GANGWAY/DECK WATCHMEN: Not necessary. If wanted, can be arranged.

OPENING/CLOSING HATCHES: Normally carried out by crew. Can be done by stevedores.

CARGO GEAR: Cargo gear certificates valid.

IDENTIFICATION CARDS: Not needed.

CONSULS: Danish, Dutch, and French Consuls in Soderhamn.

REPAIRS: Machinery repairs, plate-work and welding can be carried out to a certain extent.

DRY DOCKS: None.

REPATRIATION: Facilities for crew changes available.

AIRPORT: Nearest airport Arlanda, about 15 miles North of Stockholm.

TIME: Local time GMT plus 1 hour. Permanent.

HOLIDAYS: See "Soderhamn".

POLICE/AMBULANCE/FIRE: See "Soderhamn".

TELEPHONES: No arrangements for placing telephones on board. Telephone for ship's use, available in Harbourmaster's Office.

AUTHORITY: Hamnkontoret, Vallviks fabriker.

VARBERG: 57.07 N. 12.15 E. (See Plan Book)

DOCUMENTS:

Crew List.
Passenger List.
Maritime Declaration of Health (incl. Certificate of Derating).
Ship's Certificate of Registry.
Manifests and B/L copies.

PILOTAGE: Application for sea pilot through ship's Agent. Telephone to Pilot station 0340/10300. Pilot to board vessel on the road about 0.5 nautical miles off Varberg. (Also see "Stockholm".)

ANCHORAGE: On the roads 33 ft. depth.

RESTRICTIONS: No tide or other entry restrictions.

MAX. SIZE: Length 170 m., breadth 25 m., draft 23 ft. No tide.

HEALTH: Vessel to be kept in quarantine if disease on board suspected.

RADIO: Gothenburg Radio, SAG. VHF Channels 16 and 26.

TUGS: Tugs to be ordered 12 hours in advance.

STEVEDORES: Gangs to be ordered in advance through ship's Agent.

MEDICAL: Hospital facilities available. Desirable to give advance notice.

TANKERS: 1 tanker berth, max. draft 23 ft.

FRESH WATER: Available all docks 35 t.p.h.

FUEL: Fuel oil No. 1-5 available from tank trucks.

FIRE PRECAUTIONS: Oil No. 1 and petrol to be discharged under supervision of watchman.

DEVELOPMENTS: Planned increases of draft at the entrance to 9 m. = 29 ft. and in the harbour to 8 m. = 26 ft.

GANGWAY/DECK WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: Generally done by stevedores.

CERTIFICATES: Certificates of Registry and Derating and also Crew List.

CUSTOMS ALLOWANCE: (Tobacco), 200 cigarettes per man. (Wine/Spirits), 1 bottle per man.

IDENTIFICATION CARDS: Not needed.

CONSULS:

Vice-Consul of Finland, tel. 0340/16000
Vice-Consul of Netherland, tel. 0340/16270
Vice-Consul of Denmark, tel. 0340/16190

REPAIRS: Only minor repairs.

REPATRIATION: Can be effected.

AIRPORT: Nearest airport with regular airlines, Torslanda/Gothenburg, 50 miles North Varberg.

TIME: Local time GMT plus 1 hour. Permanent.

HOLIDAYS: Principle Swedish Holidays – when no cargo work is obtainable: New Year's Day; Good Friday; Easter Day; 2nd Easter Day; Labour Day (May 1st); Whitsun Day; 2nd Whitsun Day; Midsummer Day; All Saint's Day (November); Christmas Day; 2nd Christmas Day.

POLICE/AMBULANCE/FIRE: Tel. 90 000.

TELEPHONES: Available on dock but not for placing on board.

AUTHORITY: Port Authority of Varberg, Hammnkontoret.

VASTERAS: 59.37 N. 16.33 E.

DOCUMENTS:

Ship's Register.
2 Crew Lists.
1 Tobacco List, signed by all hands on board.
1 Valid Deratting Certificate.
1 copy of Manifest or Bill of Lading for each Swedish port of call.
Light dues receipts, if on board.

PILOTAGE: Incoming ships receive Pilot from Landsort. Pilot ordered by VHF Channel 16 (165.80 m/c) or by RT. Pilot boats fitted with VHF. Give order 5 hours before Pilot required. Pilots meet ships about 2 nautical miles outside Landsort. Light and signals in accordance with the international rules. (Also see "Stockholm".)

ANCHORAGE: Within harbour area. Depth 9-10 m.

RESTRICTIONS: None. No tides.

MAX. SIZE: Vessels reach port through two deep navigable channels – through Soderjtalje Ship Channel or via Stockholm through Hammarby Ship Canal. Lowest depth of channels at average water level is 7.3 m. (24ft. 1 in.).

Sizes of Locks:

	Length	*Width*	*Depth*
Sodertalje	136 m.	20 m.	7.5 m.
Hammarby	115 m.	17.4 m.	7.0 m.

Limitation of vessels: For Sodertalje. With beam of 18 m. max. draft 6.5 m. With beam of 17 m. max. draft 6.8 m. Max. LOA 124 m.

HEALTH: No special requirements or health documents, only valid deratting certificate. Disease or fever on board must be declared before entering port.

RADIO: Stockholm Radio.

VHF: The harbour office. VHF Channels 16 and 14. Monday-Friday 0800-1600 hrs.

TUGS: 1 tug for unberthing. Ship's lines.

BERTHING: *Deep Harbour:* 730 m. quay length, depth alongside 7.6 m. Roll-on/roll-off ramp. Two container handling cranes of 33 tons and one of 22 tons.

Old Harbour: 1,100 m. quay length, depth 4.5 m. to 7.6 m. Container handling crane of 22 tons. Heavy lift crane of 210 tons.

Little River Harbour: Quay 120 m. length, 7.6 m. depth alongside.

Power Plant Harbour: Quay 200 m. length, 5.8 m. depth alongside.

Oil Harbour: Quay 125 m. length, 7.6 m. depth alongside.

BRIDGES: 4 bridges. All of them to be opened at passage except bridge at Sodertalje which closed from 1630 until 1830 hrs. weekdays and 1300-1500 hrs. Saturday or day before a holiday.

STEVEDORES: Stevedores for next working day ordered at least 1500 hrs. day before and ETA to be given in due time.

MEDICAL: Necessary service given by local hospital and private doctors. Vaccinations carried out.

FRESH WATER: Ordered through port administration.

FUEL: Bunkering of all grades of oil can be carried out at all quays from trucks.

FIRE PRECAUTIONS: Accordance harbour regulations.

DEVELOPMENT: Constant new development and extensions. Additional room for extension in old harbour, deep harbour and oil harbour.

GANGWAY/DECK WATCHMEN: Can be obtained from shorewatch companies at different rates for night/day work.

OPENING/CLOSING HATCHES: Crew. Can be carried out by stevedores.

CERTIFICATES: Measurement certificate and all gear test certificates required, if ships gear to be used.

CUSTOMS ALLOWANCE: (Tobacco), 200 cigarettes or 200 gr. tobacco. Additional allowance depending on expected stay in port and size of vessel. (Spirits), 1 bottle of 0.75 c.l. for each crew member over 21. Additional allowance on request.

IDENTIFICATION CARDS: None required.

CONSULS: Denmark, Finland and Norway.

REPAIRS: Most deck and engine repairs, as well as electrical.

DRY DOCKS: None.

REPATRIATION: Yes. Accommodation to be ordered in good time.

AIRPORT: Arlanda, 120 km. International lines.

TIME: GMT plus 1 hour.

HOLIDAYS: See "Stockholm".

POLICE/AMBULANCE/FIRE: Tel. 90000.

TELEPHONES: In oil and deep-water harbour, most quays fitted with telephones.

SERVICES: Compass adjusting. Small radio repairs by local radio men.

SHORE LEAVE: Crew can leave vessel after customs clearance and immigration control.

AUTHORITY: Vasteras Harbour Board.

VASTERVIK: 57.46 N. 16.38 E.

PILOTAGE: Pilot boards at Ido, available day and night.
BERTHING: *Outer Harbour:* Djuphamnskajen, length 200 m., depth 8 m.

Oil Quay: depth 8 m., equipped with 3 × 8 in. pipe-lines.

Ferry Harbour: quay length 100 m., depth 5.5 m.

Inner Harbour: quay length 900 m., depth alongside from 4 to 6 m.

Oil berth: depth alongside 6 m.

FRESH WATER: Can be obtained from all quays.
AUTHORITY: Vasterviks Hamn.

VISBY: 57.38 N 18. 17 E. (See Plan Book)

DOCUMENTS: See "Stockholm".
PILOTAGE: Tel. 0498–10138 at 0600–2200, if possible five hours before arrival. Pilotage day or night. Embark/disembark outside port entrance. Radar–VHF on pilot station. (Also see "Stockholm".)
ANCHORAGE: Outside harbour, water depth 30 to 50 m. Clay bottom. No mooring buoys anywhere.
RESTRICTIONS: No tide in harbour. Currents outside harbour up to 4-5 knots running along coast. Prevailing winds, Summer time mostly S.W., Winter between N.W. and N.E. Harbour open to winds between S.W.-W., which with strong winds will make swell along the piers.
MAX. SIZE: Largest vessel, 2,500-3,000 d.w. Max. length about 100 m., turning in harbour.
TUGS: None available.
BERTHING: Four roll-on/roll-off berths. Oil Quay. Depth at all quays 5 to 6 m. No mooring buoys inside harbour. Prohibited anchor in inner basin.
BRIDGES: No bridges or overhead cables.
STEVEDORES: Working hours, Monday-Friday 0700-1600. Overtime possible.
FRESH WATER: Available.
FUEL: Oil available.
REPAIRS: Only small repairs are possible.
AUTHORITY: Visby Harbour Office.

WALLHAMN: 58.01 N. 11.42 E. (See Plan Book)

DOCUMENTS:
3 Crew Lists.
2 Passenger Lists.
1 Tobacco and/or Stores List.
Manifest.

PILOTAGE: Pilots board West of Skallen Lighthouse outside Marstrand. No pilotage of big ships during darkness. Big ships will have to anchor and await daylight. Address: "Marstrand Pilot Station", Tel. 0303-60004, VHF Channel 16. 24 hours' notice to be given through Agents.
ANCHORAGE: Whilst awaiting berth, vessels can anchor South of the entrance.
RESTRICTIONS: Large vessels entry only in daylight.
MAX. SIZE: About 50,000 d.w.t. Draft not to exceed 36 ft. (20 ft. at the inner quay for stone-loading).
HEALTH: No special action except for suspected disease, in which case Agent should be contacted for further information.
RADIO: Gothenburg Radio.
TUGS: Tugs from Gothenburg will join at entrance.
BERTHING: Four berths for roll-on/roll-off: (1) 180 m. × 11 m. depth. (2) 120 m. × 11 m. depth. (3) 30 m. + 70 m. × 8.5 m. depth and (4) 200 m. × 8.5 m. depth.

200 m. of quay for conventional handling; 50 m. of quay for loading of stone-products.

STEVEDORES: ETA given to Agents is sufficient.
MEDICAL: Doctors and dentists available at short notice. Nearest hospital in Kungaelv, 35 km.
FRESH WATER: Supplied from quay.
FUEL: Most grades of bunker oil available with short notice.
GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: By crew or by stevedores.
CUSTOMS ALLOWANCE: 200 cigarettes, 1 bottle of spirits allowed each man.
IDENTIFICATION CARDS: Not necessary. Seamen's Book or Passports should be carried.
CONSULS: In Gothenburg, 55 km. away.
REPAIRS: Smaller repairs performed by own workshop. More complicated repairs by experts from Skaerhamn, 30 km. away.
REPATRIATION: All facilities available.
AIRPORT: Torslanda International Airport, Gothenburg, 55 km. away.
TIME: GMT plus 1 hour, all the year round.
HOLIDAYS: Stevedoring and clearance of vessels can be performed every day of the year, 24 hours' service.
POLICE/AMBULANCE/FIRE: Tel. 90 000.
SHORE LEAVE: No restrictions.
AUTHORITY: Wallhamn AB Port Authority.
AGENTS: Wallhamn AB – Roto Line, POB 103, S–444 01 Stenungsund, Sweden. Tel. 0304-60720. Telex 2429.

YSTAD: 55.26 N. 13.50 E. (See Plan Book)

DOCUMENTS: Crew List.
Passenger List.
Custom Documents.
Manifests.
Bills of Lading.
Ship's Papers, etc.

TRAFFIC WARNING SYSTEM: Vessels approaching Ystad listen on Channel 16 for broadcast announcing ferry departures. All inward bound vessels have to make contact.
PILOTAGE: Vessels approaching Ystad's Harbour must apply for Pilot at Trelleborg at least 5 hours before pilotage due to commence. Tel. 10141 or VHF (Channel 16), stating tonnage, draft and destination. VHF tel. call sign "Lotsarna" plus name of pilot's station (Also see "Stockholm"). Pilot boards at Ystad entrance buoy.
ANCHORAGE: Road: 1.0 n.m. S.W. harbour entrance, 9-10 m. depth; sand and clay, good anchorage ground. The road is open for winds between S.S.W.
MAX. SIZE: Largest fully loaded vessel that can enter harbour about 5,500 d.w.t.
RADIO: Goteborg and Stockholm.
VHF: 24 hour watch at Trelleborg pilot station on VHF Channel 16 and "Ystad Port Radio" on Channel 16 during office hours.
TUGS: Tug usually meets vessel at entrance buoy. Ship's lines used. Tugs not compulsory.
BERTHING: Vessels of 160 m. length and 20 m. breadth can enter harbour. Draft 22 ft. at M.W.L.
STEVEDORES: Stevedores must be ordered from Ystads Stuveri AB. Working hours Monday-Friday 0700-1630 hrs. Meal intervals 0900-0930 and 1200-1300 hrs.
MEDICAL: Agents to be notified in advance if medical attention wanted.
TANKERS: Load/discharge lines 8 in. diameter, but reducing pieces for 6 in. and 10 in. diameter.
FRESH WATER: Available from quays. About 10 t.p.h.
FUEL: Coal and oil can be obtained by lorries.
GANGWAY/DECK WATCHMEN: Can be arranged.
OPENING/CLOSING HATCHES: Crew or stevedores.
CERTIFICATES: See "Stockholm".
CUSTOMS ALLOWANCE: (Tobacco), about 200 cigarettes or 200 gram of tobacco for each member of crew. (Spirits), one bottle for each member of crew.
CARGO GEAR: Loading/discharging with shore cranes and 4 roll-on/roll-off ramps.
IDENTIFICATION CARDS: Not needed.
CONSULS: Danish Consul, tel. 13800. Finnish Consul, tel. 13940. Norwegian Consul, tel. 13930.
REPAIRS: Mechanical workshop.
AIRPORT: 30 km. distant and served by regular airlines.
TIME: GMT plus 1 hour. Permanent.
HOLIDAYS: Christmas; New Year; Easter; Whitsun and Midsummer. No cargo work.
POLICE/AMBULANCE/FIRE: Police tel. 13620; Ambulance and Fire 90000.
SHORE LEAVE: Permitted.
AUTHORITY: Ystads Hamnforvaltning.

Syrian Arab Republic

BANIAS: 35.14 N. 35.56 E.

DOCUMENTS:
5 Copies Crew List.
1 Copy Vaccination List.
1 Copy Store List.
1 Copy Private Store List.
1 Copy Slop Chest.

In case of cargo to be discharged, following are required:
Original and 2 Copies Manifest.
3 Copies Bill of Lading.

PILOTAGE: Compulsory. Pilots board all tankers approaching the Terminals. These Pilots act in the same capacity as Mooring Masters in the berthing of vessels, after which they supervise the raising of the flexible hoses and their connection to the ship's manifold. During loading operation they act as the Company's Representatives. The Company's Mooring Masters will meet tankers in the vicinity of Marqab Light Buoy.

It is requested that tankers of 40,000 d.w.t. and over should have rigged, when in light condition, an accommodation ladder lowered to about 12 ft., above the water. This can be adjusted to suit conditions. A pilot ladder should be rigged immediately abaft the accommodation ladder, to within 2 ft. above the water. This will enable the Pilot to ascend the pilot ladder clear of the launch and then step on to the lower platform of the accommodation ladder. United Kingdom Merchant Shipping (Pilot Ladders) Rules 1965 is relevant.

APPROACHES: Vessels approaching the port should keep to the authorised passage, defined by the following co-ordinates:
(a) Lat. 35° 13′ 00″ N. Long. 35° 42′ 00″ E.
(b) Lat. 35° 13′ 00″ N. Long. 35° 56′ 00″ E.
(c) Lat. 35° 16′ 00″ N. Long. 35° 55′ 24″ E.
(d) Lat. 35° 16′ 00″ N. Long. 35° 40′ 34″ E.

ANCHORAGE: In the event of a berth not being available, or suspension of mooring operations on arrival, a good anchorage can be used South of the berths in the vicinity of the Marqab Light Buoy positioned at: Lat. 35° 12′ 7″ North, 35° 54′ 46″ East. It is important to maintain a listening watch on Channel 16 VHF, or visual watch on the shore Signal Station positioned approximately at Lat. 35° 13.4′ N., Long. 35° 56.9′ E. in order to avoid delays.

MAX. SIZE:

Berth No.	*Draft* *Winter (ft.)*	*Summer (ft.)*	*Length of Vessel (ft.)*	*Purposes*
1	Removed			
2	48	48	960	Discharging Crude Oil
	50	51		Loading
3	49	49	960	Discharging Crude Oil
	51	52		Loading
4	40	42	600	Loading
5	34	34	600	Load./Disch. white Product
6	30	32	550	Load./Disch. white Product

N.B. (1) Above is actual and temporary up to 1980.
(2) New installations will be commissioned after 1980.

NOTICE OF READINESS: Time of Notice of Readiness tendered will be considered when vessel arrives in the very near vicinity of the Marqab Light Buoy (position Lat. 35° 12′ 27″ N. Long. 35° 54′ 46″ E.), where the Mooring Master, who is the Company's Representative, will board and receive ship and remain on board throughout the entire operation.

HEALTH: Masters of tankers due may obtain free pratique by addressing the usual quarantine message to their Agents through commercial radio channels.

RADIO: Syrian Company for Oil Transport, Banias Terminal must be informed 72, 48 and 24 hours prior to arrival of a vessel's ETA, quantity of cargo required if in a state to load and maximum loading rate required. All times to be given in GMT.

Banias Terminal Radio Station. Call sign: "YKM 5". Frequency: 500 kc/s and 442 kc/s and VHF Channel 16.

Tanker VHF Radio Communications. Vessels approaching Banias can communicate with the Terminal by FM, VHF, Channel 16. Range 30 to 40 miles. Frequency 156.8 Mc/s. Simplex Operation. Call sign: Banias. On arrival, ships radio installations will be sealed according to normal practice and the boarding Mooring Master will put his own portable equipment on board. Communications will then be as follows:

Banias. Equipment: Fixed station sited in the Terminal. Call sign: "Banias". Frequency: Transmitting 163.6 Mc/s. Receiving 159.1 Mc/s. Range: 8 miles. Watches: Continuous whilst vessels are in port or immediate vicinity.

Mobile Station. Equipment: Placed aboard vessel on arrival at Banias. Call sign: Ship's name. Frequency: Transmitting 159.1 Mc/s. Receiving 163.6 Mc/s. Range: 5 miles. Watches: Mutually agreed between ship and the Terminal on first establishing contact.

Note: The radio telephone circuit is connected with the main Company Communications network in Banias Terminal.

TUGS: Available only on demand from General Directorate of Harbours at Lattakia.

MOORING REQUIREMENTS: For tankers loading/discharging at Banias are as follows:

Forward

Anchors to be fitted with marker buoys with 20 fathoms of line.
2×120 fathom mooring lines.
2 rope stoppers.
1 suitable wire stopper (preferably carpenter patent) for use with 4.75 in. to 5.5 in. mooring lines.

Aft

4×120 fathom mooring lines.
4 rope stoppers.
2 suitable wire stoppers (preferably carpenter patent) for use with 4.75 in. to 5.5 in. mooring lines.

Boat Ropes

To be rigged on either side of ship, and of not less than 4.5 in. circumference.

BERTHING: At all berths vessels moor using both anchors forward, with wires to a buoy on the port bow, one buoy astern and one on each quarter. Hoses are lifted on the port side to be connected to the ship's manifold which must have pressure gauge fitted.

HOSES:
Berth No. 2: 2×20 in./16 in. hoses.
Berth No. 3: 2×20 in./16 in. hoses.
Berth No. 4: 1×16 in. hose.
Berth No. 5: 2×12 in. hoses.
Berth No. 6: 2×12 in. hoses.

N.B. All strings of hoses end in 12 in. reducers.

FRESH WATER: Facilities are not available for the supply of potable or boiler water.

FUEL: Bunkers are not available at Banias.

BALLAST: All tankers should ensure ballast is clean. Authorities are most strict and impose heavy fines for the slightest contravention. Ballast quantity should be kept to the minimum required to ensure safe manoeuvring. No facilities for disposal of ballast ashore.

Banias is an open roadstead and sudden changes in weather can be experienced especially during the Winter months. It is good practice to commence loading as soon as hoses are connected and whilst ballast discharge is still in progress, always providing this can be achieved safely and with no danger of contamination.

POLLUTION: The Port Authorities will, in cases where pollution is ascertained, collect a declaration from the Master of the offending ship, in which declaration he authorises his Agents to pay any fine to be levied by the official committee in the future.

In the light of the above and to avoid any delay to vessels, owners are kindly requested to:

1. Supply vessels with necessary chemicals to destroy any quantity of oil overflowing into the sea.
2. Provide a bank guarantee of Stg. £5,000 to be deposited against eventual fines. Such a guarantee (or cash) must be given before offending vessel is released.

LOADING: Ships' Personnel are solely responsible for the loading operation, i.e. starting, loading rate, tank switching, topping off, stopping, etc. The Mooring Master will pass requirements to the shore control. It is in vessel's interest to advise loading rate required, also to give 30 minutes' notice of expected time of commencing loading. Order to start will be taken as final.

The Mooring Master must be advised when ship estimates 1,000 tons to go for completion of loading.

Ensure scuppers are effectively plugged. On no account are plugs to be removed.

A complete watch on deck must be maintained throughout the operation, especially towards the shore signal station, to ensure safe loading and avoid delays.

Loading Rates: No. 2, 7,000 t.p.h.; No. 3, 8,500 t.p.h.; No. 4, 6,500 t.p.h.; No. 5, 4,000 t.p.h.

Discharging pressure which should be maintained during the operation at ship's manifold is to be according to the Terminal Requirements which will be handed over to the Master at each call of vessel.

MEDICAL: Hospital facilities or other relevant medical information are available through Agent on and/or prior to arrival of vessel.

TANKERS: See "Hoses". Slops (residue) are not allowed to be discharged as no facilities for treating same are available.

CUSTOMS ALLOWANCES: According to regulations or at Customs' own discretion.

SURVEYORS: Lloyds, who are represented by the Syrian Maritime Transport Agency.

REPATRIATION: Facilities exist through Agents.

TIME: Local time is GMT plus 2 hours.

SHORE LEAVE: Permission may be obtained from Immigration Dept. ashore through Agents.

DELAYS: Unsuitable weather, and Free Berths providing berthing day and night.

REGULATIONS: Terminal Requirements and Conditions of Use of Terminal Facilities will be handed over to Master of vessel at each time of call. The following are some of the regulations in the booklet.

Vessel in berth: Ships are not allowed to remain in berth for any reason when loading operation stopped. Hoses should be disconnected and dropped to sea unless stay authorised by Terminal Superintendent.

Lighting: During hours of darkness the manifold and poop mooring area of the sea in vicinity of ship should be adequately lit.

Main Engines: Must be kept on shore notice. Repairs which will immobilise must not be carried out in berth.

Deck Machinery: Must be ready for immediate use at all times.

Whistle or Siren: To be available at all times.

Signalling: An "Aldis" type lamp to be readily available.

Stores, provisions, etc: It is strictly forbidden for provisions, stores or other items to be received or discharged whilst loading is in progress. Launches or other craft must not lie alongside during the same period.

Tanker Safety Regulations: Tanker Safety Requirements must be strictly adhered to at all times. The Mooring Master is authorised to stop all operations should he consider the safety regulations are not being complied with.

Boarding: The boarding of a vessel whilst in mooring should be restricted to persons holding valid passes which are issued by the Syrian Company of Oil Transport (SCOT) on application to ship's Agents and authorised chandlers.

This restriction is carried out in conjunction with the Syrian Harbour and Security Authorities.

WEATHER: The Director of Port Authorities has issued statistics of the weather conditions along the Syrian coast after an experience of 20 years.

State of winds and whirlwinds on the Syrian Coast

Winter	*Kind and direction of winds*
December	Regular winds blowing from N.E. to S.E., sometimes S. to S.W., the alteration of winds is accompanied with rains.
January	Excess of storms starting to blow from S.E. to N.E. The alteration of winds from the E. is occasionally accompanied by heavy rains with probability of hail.
February	Excess of storms and heavy rains blowing from S.W. to N.E. and E.
Spring	
March	Variable winds from S.E. to S.W. and accompanied by heavy rains and altering to N.W. slight.
April	Variable winds from N.W. and S.W., and S. winds accompanied with light rains.
May	Regular winds blowing S.W. to N.W. and altering to S. sometimes accompanied by rain.
Summer	
June	Slight winds from S.W. and S.
July	Moderate winds from S. to S.W.
August	Slight N.W. winds.
Autumn	
September	Winds S.W. and N.W. accompanied by some rain from 15th September. Winds will lighten during the end of the day and will alter at night to slight E.
October	Variable winds from W. to S. and N.W. accompanied by rain will alter at night to E.
November	The winds are variable from N.E. and N.W. accompanied sometimes by rain which will alter to E.

SERVICES: In the event of tankers requiring assistance to lift loading hoses, recover lost anchors, and cables, etc., limited aid may be given during normal working hours. Current charges are available on application from Agent.

SHIPMASTER'S REPORT: Cigarette allowance is strictly enforced at 40 cig. per man, and has to be carefully declared. If the Chief Steward has a slop-chest, it has to be carefully declared. Whisky has to be declared separately from other spirits, but in practice it is better to declare each type of spirits separately.

The ship's Log Book is stamped by the police.

The new flag is red, white and black, with an eagle in the centre and may be obtained through the Agent.

AUTHORITY: Port Captain, Banias.

AGENT: Gulf Agency Co. (Syria) Ltd., P.O. Box 12, Banias, Syria. Cables "Gacship", Banias. Tel. 455. Telex 20906 Beirut or 216344 Athens.

LATTAKIA: 35.31 N. 35.46 E. (See Plan Book)

PORT LIMITS: The seaward boundary of the port is about 2 miles West of the main breakwater, starting with the entrance line of 133° South.

DOCUMENTS: In addition to the copies of Bills of Lading, Cargo Manifests and the various Ship's Certificates, the Master of an arriving vessel must produce the following documents:

Crew List, showing full names of crew members, nationality, date of birth, and rank onboard.
Stores List.
Passengers List.
Health Certificates and International Inoculation Certificates.
All other documents relevant to the ship.

PILOTAGE: Upon a vessel's arrival at the anchorage area, she may call the Pilot in any of the following ways:

(a) Flying the internationally recognized flag.
(b) Blowing the ship's whistle – 2 long and 1 short.
(c) Calling the pilot station on VHF – Lattakia pilot station – using Channel 16.
(d) Signalling the pilot boat. – Grey colour hull and white colour bridge, always flying the Pilot's flag.

The Pilot boards an arriving vessel when she has reached a distance of about a few hundred metres West of the Breakwater Head under good weather conditions. When the weather is bad, an arriving vessel is directed to the port basin entrance by VHF. The Master is advised the proper directions to follow and when he is to lower the pilot ladder to the lee side.

ANCHORAGES: Upon arrival at the anchorage area referred to under "Port Limits", the vessel has to wait for orders. This Anchorage Area has a draft of 20–25 m., and all Masters awaiting there have to keep listening on VHF Channel 16, from 0600 until 0900 hrs. and from 1800 until 2100 hrs. local time, for fresh orders. It is always recommended to keep a special watch on VHF Channel 16, for sudden orders.

RESTRICTIONS: The state of tide at Lattakia is negligible, and all vessels may enter and sail out of the harbour by night or day provided she has a Pilot onboard.

MAX. SIZE: The maximum permissible length, breadth and draft of an arriving vessel are determined by the place of berth or anchorage point.

HEALTH: All arriving vessels are boarded by the quarantine service to whom all relevant documents are submitted, in particular the Deratisation Certificate, and incidents onboard reported.

The application is filed by the Agent, who accompanies the boarding authorities. Free pratique is never automatic.

RADIO: The name of the Lattakia station is "Lattakia Radio" on 2182 kc/s. or Channel 16 on the VHF. Following first contact another Channel is agreed upon, leaving Channel 16 for the pilotage service.

VHF: See "Radio".

TUGS: Tugs are always under the direct orders of the Pilot and join the vessel at the point the Pilot boards. Usually ship's lines are used but there is no charge for the use of the tug's lines.

BERTHING: Quay berths available as follows:

Name	*Length*	*Depth Alongside*
Main Quay	600 m.	9.50 m.
Silo Quay	180 m.	9.50 m.
Passenger Quay	160 m.	8.00 m.
Eastern Quay	250 m.	7.00 m.
Northern Quay	200 m.	4.00 m.

None of these quays is a specialized one. The water is always salty. Cargo is loaded or discharged either by the ship's gear or Port Co. Cranes, at the entire discretion of the latter. A ship may operate in the basin or open road in and from barges.

BULK CARGO FACILITIES: At the silo quay, grain and molasses are the only types of cargo which can be handled in bulk. Grain may be loaded into a vessel's holds at the rate of 450 t.p.h., and discharged at the rate of 50 t.p.h.

STEVEDORES: 24 hours ETA advice is required to arrange working gangs if vessel is scheduled to operate on arrival. The average loading and discharging rates vary with the type of vessel, nature of cargo, where berthing and whether working in lighters or not.

MEDICAL: Except for urgent cases on board, the Agent need not be notified in advance. Hospitals in town available, and likewise doctors and private clinics. No particular inoculations are required.

DENSITY: Salinity is 1.033 (33 grams Salt per cu.m.).

FRESH WATER: Supplied either from hydrants alongside main quay or from tank barge at a price of LS 1.00 per ton from hydrants and LS 2.50 per ton from tank barge.

FUEL: All types of known marine fuels are available, may be delivered in any quantity from cistern trucks alongside quay. 48 hours notice is required.

FIRE PRECAUTIONS: No specific precautions except that vessels carrying explosives must operate and discharge into lighters in the open road.

CONSULS: Sweden, Finland, Holland, Greece, Italy, Spain, Portugal.

REPAIRS: Only minor deck, radio, and radar repairs may be carried out. Extensive and specialised workshops are not available.

DRY DOCKS: Not available. Only a 900 ton slipway is in operation.

SURVEYORS: Only minor surveys by Lloyds, German Lloyds, and Veritas.

GANGWAY/DECK WATCHMEN: Compulsory and are supplied at a hire rate of LS 48.00 per watchman per day.

HATCHES: Normally opened and covered by the ship's crew.

CUSTOMS ALLOWANCE: Cigarettes, 2 packs per man. Spirits, as would be reasonably agreed with the Customs on board prior to sealing the vessel's stores.

CARGO GEAR: Both may be used at the entire discretion of the Lattakia Port Company. Two floating cranes are available – one of 100 ton capacity and the other of 35 ton. Also one mobile crane of 25 ton capacity.

REPATRIATION: All facilities exist and are attended to by the vessel's Agent.

AIRPORT: Damascus International airport is 340 km. from Lattakia by road.

TIME: Winter Time GMT plus 2 hours. Summer Time GMT plus 3 hours. (1st May through Septembr).

HOLIDAYS: Following the Lunar Calendar, the first 2 days of Bayram and Al-Adha are the only non-operational days.

POLICE/AMBULANCE/FIRE: Police phone No. 93; Ambulance phone No. 93; Fire phone No. 91.

TELEPHONES: No proper arrangements exist. Vessels in port may use VHF Channel 16 with the pilot station of Lattakia Radio.

SHORE LEAVE: Crew members allowed ashore with shore passes.

IDENTIFICATION CARDS: Shore passes in addition to the seaman's book.

DELAYS: Vary with state of congestion prevailing in the port.

DEVELOPMENTS: The execution of the 2nd development stage has just started and it will cover the following new facilities:

Specialized container and Ro/Ro quays.

Draft	*Length*	
13.0 m.	260 m.	Containers
11.5 m.	190 m.	Containers
11.5 m.	200 m.	Ro/Ro
11.5 m.	350 m.	General Cargo
10.5 m.	425 m.	General Cargo
7.0 m.	450 m.	General Cargo

In addition there will be new warehouses and stacking areas totalling 230,000 sq.m.

AUTHORITY: General Manager, Lattakia Port Company, Lattakia, administered by the Syrian Ministry of Transport.

AGENT: Gulf Agency Co. (Syria) Ltd., POB 210, Lattakia, Syria. Cables "Gacship". Lattakia. Tel. 26300, 26301. After hours Tel. 26303, 26304. Telex 20906 Beirut or Athens 216344.

TARTOUS: 34.53 N. 35.45 E. (See Plan Book)

DOCUMENTS: Bill of Health – The usual International form should be filled in on arrival and the Agent will deliver on board the Bill of Health and Port Clearance upon departure.

Manifests – Should be certified by the Syrian Consulate at port of loading in 4 copies.

Ship's Registry – To be presented to the Port Authorities upon request.

Crew List – 4 copies should be handed over to the Agent along with passenger or transit manifests.

Store List – 2 copies required by Customs who will allow 40 cigarettes to be retained by each person on board, the balance of slop chest and stores shall be sealed during ship's stay in port. Customs officers are at liberty to search crew quarters.

Deratisation Certificate – Valid certificate required and no extension can be obtained.

APPROACHES: Vessels approaching the port should keep to the authorised passage defined by the following co-ordinates:

Lat. 34° 56′ 24″ N.	Long. 35° 38′ 00″ E.
Lat. 34° 56′ 24″ N.	Long. 35° 48′ 36″ E.
Lat. 34° 59′ 00″ N.	Long. 35° 50′ 00″ E.
Lat. 34° 59′ 00″ N.	Long. 35° 52′ 36″ E.
Lat. 34° 54′ 24″ N.	Long. 35° 51′ 12″ E.
Lat. 34° 54′ 24″ N.	Long. 35° 37′ 48″ E.

ANCHORAGE: Vessels proceeding to Tartous pick up Pilot at the Anchorage which is 0.5 miles S.W. of the main breakwater. The rocky bottom constitutes good holding ground with a depth of up to 20 m. of water.

MAX. SIZE: At present minimum depths are at the entrance of the harbour about 2 cables seaward of the green light on the S.W. Breakwater. Depth about 33 ft. Max. draft 32 ft. dependent on swell. Also see "Tankers".

RADIO: Tartous Radio, call sign YKO, continuous watch on 2182 kHz from 0600 to 2400 hrs.

BERTHING: Mooring Masters are temporarily supplied by Lattakia port and vessels should therefore contact Agents at Lattakia giving them their ETA and requirements. Vessels berth heading to the predominant S.W. winds, i.e. starboard side alongside unless contrary winds prevail at the time of the berthing.

Southern breakwater – 2,650 m. long called Main breakwater
Northern breakwater – 1,650 m. long called Lee breakwater

The distance between the 2 heads of these breakwaters is 250 m. with a depth of 10.5 m., which is being dredged in order to bring it up to 13 m.

The harbour is divided into 3 basins which are protected by the 2 breakwaters: (1) The North basin; (2) The Middle basin; (3) The Southern basin. The Southern basin is the only one used presently, for the discharge of cargo.

12 vessels can be moored at anchor inside the breakwater of this basin, the depth being between 8–13 m. The turning circle at the entrance is 450 m. diameter with a depth of 11–13 m.

The main quay which is 150 m. wide offers on its Southern side from the shore side 300 m. of jetty with a depth alongside of 2–4 m., 300 m. with 8 m. and 200 m. with 9 to 10.5 m. depth. A standard gauge railway line is installed on the entire length of the quay.

POLLUTION: See "Banias".

TANKERS: *Operator:* Syrian Crude Oil Transportation Co.

Maximum safe length of tankers acceptable – 1,500 ft.
Maximum safe draft of tankers acceptable – 68 ft.
Maximum deadweight of tankers acceptable – 100,000 tons.

There are 2 berths for loading:

No.	*Max. Rate*	*Sealine*	*Hoses*	*Depth of Water*
1 (North)	4,000 t.p.h.	1×28 in.	2×12 in.	76 ft.
2 (South)	5,000 t.p.h.	2×28 in.	2×16 in.×12 in.	72 ft.

Loading is by gravity and loading rate depends upon height of tank and level of oil. All strings of hoses are fitted with 12 in. butterfly valves.

ETA: It is essential that tankers bound Tartous Terminal, S.A.R. communicate with "YKM – 5", at least 48 hours, prior to arrival, stating cargo required, maximum loading rate, SWL of derrick and confirming that the ballast is clean, and the last ETA Tartous Terminal.

Confirmation of ETA: Tartous Terminal control is equipped with Channel 16. Arriving ships should make contact at least 2 hours before ETA Tartous anchorage area. It is in vessel's interest to make contact to avoid delay on arrival. Vessels not equipped with Channel 16 should contact "YKO" Tartous Control on frequency 2182 – 2662.

Notice of Readiness: Notice of Readiness will be accepted when vessel arrives in the very near vicinity of the anchorage area (Position Lat. 34° 57′ N., Long. 35° 49′ 45″ E.) where the Mooring Master, who is Company's representative will board and receive vessel and remain on board throughout the entire operation.

Pilot Ladder: Combination of accommodation and pilot ladder to be rigged, accommodation ladder to be lowered to within 12 ft. of water. Pilot ladder to be placed abaft and to within 3 ft. of water.

Anchorage: In the event of berth not being available or suspension of mooring operations on arrival a good anchorage is to be used South of the berths in the vicinity of the anchorage area.

Shore Control will keep vessel advised of expected time of berthing, etc.

It is important and in the vessel's interest to maintain a listening watch on Channel 16 or a visual watch on the shore Signal Station, to avoid delays.

On being advised of expected time "Mooring Master will board", heave short anchor before his arrival.

Moorings:

Forward: Anchors to be fitted with marker buoys with 20 fathom of line. 2×120 fathom mooring lines; 2 rope stoppers; 1 suitable wire stopper (preferably carpenter patent) for use with 4.75 in. – 5.5 in. circ. mooring wires.

Aft: 4×120 fathom mooring lines; 4 rope stoppers; 2 suitable wire stoppers (preferably carpenter patent) for use with 4.75 in. – 5.5. in. circ. mooring wires.

Boat Ropes: To be rigged on either side of ship and of not less than 4.5 in. circ.

Derricks and Cranes: SWL of 7 tons is recommended. it must be capable of plumbing overside abreast of loading manifold.

Loading Manifold: 2 suitable reducers to be fitted prior to arrival on port side and to be connected to the Oil Company's hose connections (12 in. series 150 flanges). The following tools to be available: 2 spanners 0.375 in., 2 spanners 0.875 in., 2 hammers 7 lbs., 1 axe 2.5 lbs.

Hose hang-off bitts are required at about 10 ft. from the ship's rail at the loading manifold to secure submarine hoses on the port side.

Safety of Mooring: On completion of mooring operation vessel must have not less than 7.5 shackles of anchor chain in the water.

Ballast: No dirty ballast.

(a) The Port Authority is most strict and will impose heavy fines for any oil pollution of the sea. In addition they may order vessel out of the berth to sea to clean any such contaminated ballast, and keep it on board vessel in a separate or slop tank. N.O.R. will not be accepted until ballast becomes clean.

(b) Ensure ballast quantity on board is kept to a minimum to safe manoeuvre in the prevailing weather conditions.

(c) Excess ballast causes delay, Tartous is an open roadstead consequently sudden changes in weather can be experienced especially during the Winter months. It is good practice to commence loading as soon as hoses are connected and whilst ballast discharge is still in progress, always providing, this can be achieved safely and with no danger of contamination.

(d) Leakage or spillage of oil on board ship must be collected and not be swept or washed overboard.

Ship's Assistance: Ship's crew with an Officer in Charge to assist in All operations as advised by the Mooring Master. This includes lifting, connecting, disconnecting, lowering of hoses and tending anchor cables and moorings.

Deck Watch: A complete watch on deck must be maintained throughout the operation, especially towards the shore Signal Station to ensure safe loading and to avoid delays.

Deck Scuppers Plugs: Ensure scuppers are effectively plugged. On no account should plugs be removed.

Loading Operations: (a) Ship's personnel are solely responsible for the loading operations, ie. starting, loading rate, tank switching, topping off, stopping, etc. The Mooring Master will pass requirements to Shore Control. It is in vessel's interest *to advise loading rate required, also to give 30 minutes notice of expected time of commencing loading.*

(b) Should vessel require adjustments in the loading rate, please advise the Mooring Master, sufficient notice must be given to enable shore operators to comply. Failure to give proper warning may cause delay or a tank overflow on board.

(c) The Mooring Master will not transmit any loading instructions to the shore until the responsible ship's Officer has admitted that:

Ship is safely moored.
Hoses are correctly connected.
All valves have been set for receiving cargo.

Order to start will be taken as final.

Vessels in berth: Ships are not allowed to remain in berth for any reason when loading operation is stopped, or disconnect hoses and drop them into the sea unless authorised by Terminal Superintendent.

Lighting: During hours of darkness the manifold, poop, mooring area of sea in vicinity of ship should be adequately lit.

Main Engines: Must be kept on short notice. Repairs which will immobilise them must not be carried out in berth.

Deck Machinery: Must be ready for immediate use at all times.

Whistle or Siren: To be available at all times.

Signalling: An "Aldis" type lamp to be readily available.

Stores Provisions, etc.: It is strictly forbidden for provisions, stores or other items to be received or discharged whilst loading is in progress, launches or other craft other than Company launches must not lie alongside during the same period.

Tanker Safety Regulations: Must be strictly adhered to at all times. The Mooring Master is authorised to *stop all operations* should he consider that Safety Regulations are not being complied with.

Boarding: The boarding of vessel whilst in mooring should be restricted to persons holding valid passes which are issued by the Terminal Superintendent on application to ship's Agents and authorised Chandlers. This restriction is carried out in conjunction with the Syrian Harbour and Security Authorities.

Vessel not allowed to send any crew or materials outboard for any reason before asking Agents for granting the official authority.

Guests: Masters wishing to receive guests on board should make arrangements through their Agents.

Action in case of emergency: In the event of fire, oil spillage or other emergency on the vessel

The Emergency Signal is

3 or more blasts of not less than 10 seconds duration each on whistle or siren supplemented by a continuous ringing of the general alarm bells.

Corridor: The corridor must be followed by vessel to Tartous Terminal:

Corridor Leading to Tartous Terminal

(a)	Lat. 34° 59′ 00″ N.	Long. 35° 50′ 00″ E.
(b)	Lat. 34° 59′ 00″ N.	Long. 35° 52′ 36″ E.
(c)	Lat. 34° 56′ 24″ N.	Long. 35° 38′ 36″ E.
(d)	Lat. 34° 36′ 24″ N.	Long. 35° 38′ 00″ E.
(e)	Lat. 34° 54′ 24″ N.	Long. 35° 37′ 48″ E.
(f)	Lat. 34° 54′ 24″ N.	Long. 35° 51′ 12″ E.

FRESH WATER: Unlimited supplies available to vessels berthed alongside the main pier.

FUEL: Only available in very limited quantities by tanker truck.

MEDICAL: Medical facilities are available, but serious cases may involve transportation to Lattakia or Damascus.

DEVELOPMENTS: A new quay for phosphate is now under construction 300 m. long and 4 m. depth and will be prolonged by a quay of 250 m. length and 11 m. depth for vessels loading phosphate up to 35,000 tons capacity. 1 shiploader, rate 1,000 t.p.h.

A dry dock will be soon under construction for repairing vessels and tankers with a capacity varying between 40 and 60,000 tons. Also 2 slip-ways for general overhaul for small vessels of 1,000 tons and less.

FLOATING CRANE: A floating crane of 100 tons lifting capacity available.

SHORE LEAVE: No amenities for the crew exist in the town of Tartous but crew may, if required, proceed ashore with a landing permit issued by the local security services.

WEATHER: See "Banias".

AUTHORITY: Harbour Master.

AGENT: Gulf Agency Co. (Syria) Ltd., Houssein Ali Building, Alnarges Street, PO Box 19, Tartous, Syria. Cables "Gacship", Tartous. Tel. 21897, 22287. Telex: Beirut 20906 or Athens 216344.

NOTES

Please also advise Shipping Guides Ltd.

Taiwan

HUALIEN: 23.59 N. 121.38 E.

PORT LIMITS: Radius of 1 mile from the centre of Hualien Kan Breakwater Beacon (23° 59′ 11.3″ N. 121° 38′ 35″ E.).

DOCUMENTS:

Ship's Register.
Derat Certificate.
Last Port Clearance.
Taiwan Tonnage Dues Certificate.
Pratique.
8 copies Crew List.
1 copy Crew List visaed by office of China Mission (applicable to American vessels).
8 copies Passenger List – landing and transit.
1 list showing dates of vaccination (within 3 years) of all crew and any landing passengers. WHO "Yellow Books" may be examined.
1 Chinese Maritime Customs Stores List.
1 list Foreign Currency in safe.
1 list Narcotics in safe.
1 list Arms and Ammunition.
1 set of copy Bills of Lading.
2 Manifests of Inward Cargo.
3 Manifests of Through Cargo.
2 lists of Unmanifested Inward Parcels.
2 lists of Mail for landing.
Vessel's Log Book.

PILOTAGE: Compulsory. At anchorage hoist 'G' flag.

ANCHORAGE: *Quarantine Anchorage:* Positions:

(A) Lat. 23° 58′ 30″ N. Long. 121° 36′ 50″ E.
(B) Lat. 23° 58′ 30″ N. Long. 121° 37′ 10″ E.
(C) Lat. 23° 57′ 50″ N. Long. 121° 36′ 50″ E.
(D) Lat. 23° 57′ 50″ N. Long. 121° 37′ 10″ E.

RESTRICTIONS: Hualien Harbour closed to all ships at 0000 until 0500 hrs. Large ships not allowed to enter after sunset.

MAX. SIZE: Draft not exceeding 8.5 m. and length 150 m. may enter Hualien Harbour at present time.

HEALTH: At anchorage hoist 'Q' flag.

RADIO: Hualien Radio XSY; ETA reported at least 24 hours before arrival.

TUGS: Normally used in harbour. Ship's lines should be used.

BERTHING: *Deep water wharf:* 1,238 m. (8 berths) capable of berthing 1×4,000, 3×6,000, 3×10,000 and 1×15,000 ton vessels, at the same time.

There is an additional 1,120 m. of deep-water wharves, with 6 berths which were built under the third extension project.

CRANES: 1×52 ton electric derrick crane.
6×3–25 ton mobile cranes.

STEVEDORES: Stevedores will be assessed against ships except when otherwise agreed between ships and consignees or shippers.

MEDICAL: Hospitalization can be arranged through Agent.

FRESH WATER: Hoses from water-lines to tanks.

FUEL: Fuel viscosity, special regular full SUS at 122°F, max. 225; regular full SUS at 85°F, min. 225; SUS at 122°F, max. 200; Diesel fuel viscosity, SUS, 100°F 35–45. Fuel line 6 in. connection, otherwise notify in advance.

DEVELOPMENTS: The outer harbour extension began 1978 and will be completed in 1985. The project will increase the berthing capacity to 25 ship berths.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CERTIFICATES:

Ship's Nationality Certificate.
Passenger ship Safety Certificates.
Cargo ship Safety Construction Certificates.
Cargo ship Safety Equipment Certificates.
Cargo ship Safety Radiotelegraphy (Radiotelephony) Certificates.
International Load Line Certificate.

IDENTIFICATION CARDS: Passport or Seaman's book required.

AIRPORT: Domestic airport connected to Taipei and Kaohsiung International Airport.

TIME: GMT plus 8 hours.

AUTHORITY: Hualien Harbour Bureau.

KAOHSIUNG: 22.37 N. 120.16 E.

PORT LIMITS: Ship considered to be an "arrived vessel" when anchored at either of following locations:

1. Northern anchorage: Within 2 miles radius off Kaohsiung Lighthouse (22° 38′ 01″ N. 120° 15′ 25″ E.) forming a sector between Southern side of outer harbour channel toward shore line Southward.

2. Southern anchorage: Within a radius of 2.5 miles from the signal station of the second harbour entrance (22° 33′ 21″ N. 120° 18′ 26″ E.) forming a sector between Northern side of outer harbour channel toward shore line Northward.

3. For VLCC to discharge at 2 Monobuoys: SBM No. 1 position 22° 30′ 29″ N. 120° 17′ 49″ E. SBM No. 2 position 22° 29′ 45″ N. 120° 16′ 41″ E. Tankers are to anchor 1.5 miles West of the respective SBM as directed by Agents.

DOCUMENTS:

10 Crew Lists.
1 Customs Stores List (plain form acceptable).
1 Narcotic List.
1 Foreign Currency List.
1 Crew's Declaration List.
1 Arms and Ammunition List.
1 Parcel, Passenger and Mail List (all nil items may be put in one statement).
1 Set of Bills of Lading and Manifests if any.

PILOTAGE: Compulsory. Agents will arrange for Pilot to board vessel at anchorage outside breakwater. Pilot boat flies code flag "H".

Containerships over 15,000 g.r.t. and other freighters or tankers over 200 m. LOA must take 2 Pilots at double pilotage.

ANCHORAGE: See "Port Limits".

RESTRICTIONS: Containerships can enter and sail 24 hours a day. Other vessels up to midnight only. Vessels with max. draft 34 ft. must await high water to enter via Northern entrance.

MAX. SIZE: Length and breadth no restriction (largest containership entered: 950 ft. LOA and 106 ft. beam). Max. draft inner harbour 34 ft. during high tide. Tankers with draft over 34 ft. discharge at Monobuoy outside.

HEALTH: Free pratique granted at anchorage after Master completes Quarantine Declaration Form furnished by quarantine doctors. No radio pratique available. No quarantine necessary if second port in Taiwan.

Shipmaster's Report: Master visited the port in 1976 and Cholera Certificates were not requested for inspection.

RADIO/VHF: Kaohsiung Radio (XSW). Normally used by Agents when cabling vessels. Contact with the Agent and Port Authorities may be made via Kaohsiung Port Radio on VHF Channel 16. Call Port Radio on Channels 16/14, 156.8 mHz. 1 hour before arrival to report ETA at Kaohsiung Roads.

TUGS: Harbour tugs usually join vessel after entry and while berthing. Ship's lines always used. Largest tug 2,400 h.p.

BERTHING FACILITIES: No specific requirement except bulk-carriers and tankers with max. draft of 34 ft. must berth during high tide.

Wharves: There are at present 55 wharves (including 2 shallow-water berths) with a total length of 10,582 m., capable of accommodating 66 ships. Buoys: The harbour has in all 37 mooring buoys capable of berthing 26 ocean-going ships of various sizes.

Container Terminals: No. 1 – consists of 3 berths Nos. 41–43. Berths Nos. 42–43 served by 1 MHI 35-ton gantry crane. 4 straddle-carriers available for 20 ft./40 ft. containers.

No. 2 – Includes 4 berths Nos. 63–66. Berths Nos. 64–66 are leased to lines for exclusive use. Berth 63 is the only common user berth. Container handling equipment includes 6 SIS gantry cranes and 20 straddle-carriers for handling 20 ft./40 ft. containers.

No. 3 – Planned to build 3 berths Nos. 68–70. first Berth No. 68 completed 1977. Each berth 320 m. long with water depth 14 m. and will have 2 gantry cranes and 4 travel-lifts.

Grain and other bulk handling equipment: For grain, there are 2 silos of 40,000 tons capacity each, unloading rate 300–400 t.p.h. Another 80,000-ton silo being built. 105 grabs also used to discharge grain by ship's gear at hourly rate of 40–50 tons per gang/hour. For heavy lifts, there are 3 floating cranes of 120, 60 and 30-ton capacity available.

STEVEDORES: All Government stevedores ordered by Agents as required.

MEDICAL: No advance notice required unless emergency case. Vaccination Certificates against smallpox (3 years) and cholera inoculation (6 months) required.

See "Health" – Shipmaster's Report.

TANKERS: Discharge lines at oil terminal inside harbour 8 in. (2 berths), and 12 in. at Monobuoy outside with necessary reducers supplied from ashore. In latter case, Master must inform Agents size of ship's manifold.

There are two Monobuoys situated about 7 miles S.S.E. of the Northern Anchorage. Their positions are:

SBM No. 1 – 22° 30′ 29″ N. 120° 17′ 49″ E. A white flashing signal light is mounted at the centre of the buoy with a range over 5 miles. The light appears for 1 second and goes off for 2, it then appears for 1 second and goes off for 11 seconds. This cycle is repeated. The area around the mooring buoy has a depth of 68 ft. and can accommodate tankers up to 140,000 d.w.t. The current runs at a maximum of 2.5 knots.

SBM No. 2 – 22° 29′ 45″ N. 120° 16′ 41″ E. depth around the area about 98 ft. capable of discharging tankers up to 250,000 d.w.t. Characters of signal light mounted at the centre of the buoy: White flash 1 second on and 1 off for 3 times then 1 second on and 8 seconds off in that cycle.

The 2 buoy moorings have facilities for 2×12 in. hose connections. Bunkers and fresh water not obtainable. Stores can be arranged for delivery by boat. Other services available to tankers at the buoys are confined to those of urgent nature.

VLCC's programmed to use the SBM Terminal are required to anchor 1.5 miles West off the respective SBM for arrival clearance. Pilot/Quarantine/Immigration, Cargo Supervisor and his hose-handling party board in this vicinity from a tug. After the discharge of cargo, the vessel is required to proceed to the Northern Anchorage to receive sailing clearance.

DENSITY: Average 1015 in Summer, 1023 in Winter.

FRESH WATER: Most berths supplied from shore line, otherwise from barge paying additional lighterage.

FUEL: All grades, mostly received from barge. Owners must contact suppliers for nomination through Chinese Petroleum Corp. before ship's arrival.

FIRE PRECAUTIONS: No specific regulations, but routine precautions should be enforced.

DEVELOPMENTS: 8 new wharves for handling bulk cargo were added in 1976. No. 3 Container Terminal with first of 3 berths (No. 68) completed in 1977 (Length 320 m. each, depth 14 m.).

GANGWAY/DECK WATCHMEN: Recommended, to meet local security requirement.

OPENING/CLOSING HATCHES: Mostly handled by stevedores except steel hinged covers, which are to be done by crew.

CERTIFICATES: Ship's registry, Load-line, Safety Construction, Safety Equipment, Safety Radio-telegraphy and Derat Exemption Certificates must be inspected by Customs/Harbour Authorities.

CUSTOMS ALLOWANCE: 200 cigarettes or 1 box cigars and 1 bottle of wine or spirit allowed each. Application can be made to break seal for next issue once every 4 days.

CARGO GEAR: No additional requirements, but Cargo Gear Certificate must be valid.

IDENTIFICATION CARDS: Not required.

CONSULS: All in capital city Taipei, 230 miles North of Kaohsiung.

REPAIRS: China Shipbuilding provide 1,800 m. of quaywall and can handle any kind of repairs.

DRY DOCK: China Shipbuilding Corp. have a dry dock of 950 m. long with breadth 92 m. and average depth of 14 m. This dry dock is separated into 3 stages by 2 intermediate gates in between, of 380/390/180 m. respectively. Each stage can be independently operated to facilitate fabrication of ship sections, as well as to dock and repair ships.

A floating dock "Viva Island" LOA 174 m. with distance between side walls of 30 m. Draft over keel blocks 7.3 m. with lifting capacity of 11,500 tons.

REPATRIATION: Crew changes arrangeable.

AIRPORT: 7 miles from main port area. Presently linked with Hong Kong, 1 return flight daily.

TIME: Local: GMT plus 8 hours. No alteration during the year.

HOLIDAYS: New Year's Day (Jan. 1st–2nd); Youth Day (Mar. 29th); Ancestors' Memorial Day (Apr. 5th); Labour Day (May 1st); Dragon-boat Day (5th day of 5th Lunar Month); Mid-Autumn Festival (15th Day of 8th Lunar Month); Confucius' Birthday (Sept. 28th); National Day (Oct. 10th); Taiwan Restoration Day (Oct. 25th); Late Pres. Chiang's Birthday (Oct. 31st); Dr. Sun's Birthday (Nov. 12th); Constitution Day (Dec. 25th); and Chinese Lunar New Year's Day (2 days mostly in Feb.). No work on New Year's Day (Jan. 1st), Labour Day (May 1st) and Chinese Lunar New Year's Eve and New Year's Day. Double stevedoring rates for rest of holidays.

POLICE/AMBULANCE/FIRE: Police and Ambulance: call 562311 Ext. 441; Fire: 562311 ext. 441 or 226119.

TELEPHONE: Telephone available for ships alongside wharf.

SERVICES: Laundry, ship-chandler and competent technicians available for repair of radar, radio, compass adjusting and other navigational aids. Tank cleaning equipment and facilities not available.

SHORE LEAVE: Normally arrangeable.

REGULATIONS: No curfew exists. Port opened for containerships 24 hours day and night; for other vessels between 0600–2300 hrs. only. Vessels flying flag of nations without diplomatic relation with the Republic of China must send 1 copy each of ship's photo (8 in.×10 in. broadside) and photocopy of Registry or Tonnage Cert. and 10 crew lists for application of entry permit.

DELAYS: With rapid extension of the harbour and more new wharves and container terminals built. Delay has been considerably reduced and very rarely occurs.

AUTHORITY: Kaohsiung Harbour Bureau.

KEELUNG: 25.08 N. 121.45 E. (See Plan Book)

PORT LIMITS: Any ship is considered to be an "arrived ship" once she has reported to Keelung Harbour Radio Station whether or not actually entering the outer harbour. However, Quarantine and Customs Inspectors do not attend ships outside the breakwaters due to lack of adequate transportation also they do not consider any ship an "arrived ship" unless she actually enters the outer harbour.

DOCUMENTS:

Ship's Registry.
International Load Line Certificate.
International Safety Certificate.
Last Port Clearance.
Crew List.
Fumigation Certificate.
Import Manifests.
Through Cargo List.
Store List.
Arms and Ammunition List.
Narcotics List.
Foreign Currency List.
Parcel List.
Passenger List.
Yellow-book for every person on board (Vaccination Certificate).

PILOTAGE: Compulsory from anchorage to dock and any other movements in port. Pilot may also meet ships within 1 or 2 nautical miles North of breakwaters, commencing sunrise till sunset upon ship's/agent's request. While waiting outside breakwaters for a Pilot, vessels shall keep adequate space and take care of both ship's and Pilot's safety. Before arrival, vessels shall contact Keelung Harbour Radio Station (25° 09′ 42.5″ N. 121° 44′ 57.5″ E.) via VHF on Channel 16 to ascertain Pilot's exact boarding time.

ANCHORAGES: Area in outer harbour is 8 to 16 m. in depth and can only contain 8 ocean-going vessels at a time. Vessels may also anchor outside breakwaters for Pilots or entry instructions.

RESTRICTIONS: Keelung Harbour Radio Station consists of Naval Harbour Control Signal Station and Harbour Bureau Signal Station. The former control the entry and exit of all the vessels with the latter's assistance. Any ship shall apply in advance of her actual entry/exit by light signal or via VHF to Keelung Harbour Radio Station and shall not leave dock nor weigh anchor nor sail and remain close to harbour entrance before obtaining from Naval Harbour Control Signal Station the signal permit to entry or leave.

HARBOUR APPROACHES: At a location of 2.5 nautical miles N.N.W. from Keelung Isle ships should take Wan Jen Tsui Pi lighthouse and Chiu Tzu Shan lighthouse as coordinates and sail in on course of true bearing 201°. When 2 nautical miles North from harbour entrance, ship's course should be adjusted for entry. Ships should allow adjustment for their planned course and speed and should pay special attention to Hsin Lai Reef, East Breakwater, wind and current.

MAX. SIZE: Max. possible overall length less than 900 ft. Vessels or Agents shall declare ETA to Harbour Bureau 24 hours prior to their arrival.

HEALTH: Radio pratique not possible. Pratique will be granted when vessel is in anchorage. Stool test will have to be conducted for all Crew members if the vessel arrives from an affected area within 5 days.

RADIO:

1. Call Name: Keelung Harbour Radio Station is called Keelung Port Radio (or K.P.R.).
2. Channel:
   (1) Channel 16 (156.8 mHz.) is a duty channel, used for establishing communications.
   (2) Channel 14 (156.7 mHz.) is used for longer communications after making contact on Channel 16.
   (3) Channel 12 (156.6 mHz.) is a spare Channel, used for emergency.
3. Communication Contents:
   (1) Messages for vessels to enter or exit.
   (2) Matters concerning navigation and anchorage.
   (3) Other Emergencies.
4. Communication Distance: Any waters within diameter of 10 nautical miles from this station.
5. Priority:
   (1) Emergency salvage at sea.
   (2) Messages for vessels waiting outside breakwaters for entry instructions.
   (3) Messages for vessels at anchor in outer harbour.
   (4) Messages for vessels departing.
6. Languages to be used:
   (1) Mandarin.
   (2) English.
7. Remarks: Communications always in plain languages. Any codes or private conversations are not allowed unless approved by officers in charge.
8. Vessels shall contact Keelung Harbour Radio Station via VHF as soon as they are 10 nautical miles from the harbour and shall not be considered as "reported" unless answered by the station. The reporting time is to be counted for the basis for allocating berths. The report includes:
   (1) Nationality.
   (2) Vessel's Name.
   (3) Call Letters.
   (4) ETA Outside Harbour.
9. Communication Procedures: In accordance with international radio communication procedures.
10. Vessels without VHF or with VHF out of operation and thus unable to report earlier to Keelung Harbour Radio Station (25° 09′ 42.5″ N. 121° 44′ 57.5″ E.) shall contact the station by light signal until answered, as they report when vessel arrives within the visual scope of Ton Pan Yu Signal Station (domiciled with Keelung Harbour Radio Station) in the waters outside the harbour. The report includes:
    (1) Nationality.
    (2) Vessel's Name.
    (3) Call Letters.
    (4) Actual arrival time or anchoring time outside the harbour.
11. Vessels unable to report by light signal through lack of power shall use other means to report same information as indicated in item 10 above or hoist vessel's call letters enabling registration at the station.

RADAR/VHF: No radar service to aid navigation in port. VHF and flashing lamp only used on ship's arrival. However, Pilots carry pocket walkie-talkie's to communicate with tugs and line-men on dock.

TUGS: Three tugs with 2,000 to 2,400 h.p. and 3 other tugs with 1,500 to 1,700 h.p.

BERTHING: Docking during daytime, and also during night-time if weather permits.

SPECIALISED CARGO HANDLING FACILITIES: Wharves No. 2 to 4 and 14 to 18. 2 at 4 tons stationary shore cranes on each wharf.

Berth 2 and E2, passenger ships (and cargo ships if no passenger ships in port).

Berth 21, for receiving ore, sulphur, etc., and loading fertiliser.

Berth 22-26, for container ships and "lash" vessels. Equipment includes 4 gantry cranes capacity 35 tons. 12 straddle-carriers for 20–40 ft. containers and 1 side-loader for 20–40 ft. containers.

Berth 30, 3 elevators for grain in bulk. Max. capacity 600 t.p.h., average capacity 480 t.p.h.

CRANES: 21 mobile cranes, capacity 10–100 tons, 17 wharf cranes, capacity 3–30 tons. 4 container cranes, capacity 35 tons, 4 floating cranes, capacity 90 tons, 60 tons, 50 tons and 30 tons.

Other equipment: 260 forklifts, capacity 1–40 tons; 40 electric platform trucks; 8 towing tractors; 5 portable pneumatic unloaders, and 30 grab buckets.

STEVEDORES: Owned and operated by Harbour Bureau, a government agency. Stevedores paid by tonnage instead of hours. Stowage plan and cargo details must be presented to concerned offices 24 hours prior to operation.

MEDICAL: All clinics and hospitals in Keelung area with English-speaking doctors and modern hospitals available in Taipei, a city 30 km. away.

TANKERS: Wharf No. 33 specially reserved for tankers, draft limited to 35.6 ft.

DENSITY: 1002 to 1023.

FRESH WATER:

1. Water supply facilities: Every wharf equipped with 2 hydrants of 2.5 in. in diameter, each tap delivering at rate of above 20 t.p.h.
2. 5 water barges, each barge delivering at rate of over 60 t.p.h.
3. Price:
   (1) Water supplied alongside priced at NT$40.00 (current exchange rate NT$38.00 to US$1.00) per ton.
   (2) Water supplied by barges at NT$63.00 per ton.
4. Application: Ships/Agents shall notify Harbour Bureau as early as possible if they need fresh water.

FUEL: Bunkers available subject to ship's/Agent's advance notice to C.P.C. who operate the bunker facilities.

FIRE PRECAUTIONS: Special wharves for tankers, wharves No. 33 and 33B having automatic fire equipment; fire brigade and fire boats available.

GANGWAY/DECK WATCHMEN: Harbour policemen always assigned by authorities at gangway free of charge. Other gangway/deck watchmen are recommended.

OPENING/CLOSING HATCHES: Normally carried out by stevedores, excepting new designs on modern vessels.

CUSTOMS ALLOWANCE: (1) Each Crew member allowed 200 cigarettes in bulk or half a pound of tobacco. (2) Each Crew member allowed 1 opened bottle of wine and 1 dozen cans of beer. Tobacco and wine stored in store room for purser must be declared and are limited to 3 cartons of cigarettes and 3 bottles of wine. Slopchest will be sealed on arrival.

IDENTIFICATION CARDS: Passport or other identification papers are needed.

CONSULS: None. Mostly stationed at Taipei.

REPAIRS: Any ship which needs repairs must itemise repairs and declare them to Harbour Bureau via shipping company or Agent and then the repairs will be carried out in accordance with the relating articles under Administration Regulations on Harbour Business for Taiwan Provincial Commercial Harbours. As to docking, ships may deal with China Shipbuilding Corp. Keelung Dockyard or Keelung Harbour Bureau repair plant via shipping companies or Agents.

DRY DOCK: China Shipbuilding Corp. Keelung Dockyard has 2 dry docks, 1 for vessels under 100,000 tons and another for 25,000 tons. Keelung Harbour Bureau Repair Plant has 1 dock for vessels under 5,000 tons.

REPATRIATION: Crew repatriation usually carried out through International Airport in Taipei, and Immigration prefer either individual or group visa for landing crew from ship.

AIRPORT: International airport in Taipei only 30 minutes by car.

TIME: GMT plus 8 hours. No alterations.

HOLIDAYS: New Year's Day (1st–2nd Jan.); Lunar New Year's Day (2 days in Feb.); Youth Day (29th Mar.); Labour Day (not a national holiday but only for labourers) (1st May); Dragon Boat Day (1 day in June); Mid-Autumn Day (1 day in September); Confucius Birthday or Teachers' Day (28th Sept.); National Day (10th Oct.); Taiwan Restoration Day (25th Oct.); late President Chiang's Birthday (31st Oct.); Dr. Sun's Birthday (12th Nov.); Constitution Day (25th Dec.).

POLICE/AMBULANCE/FIRE: The gangway guard assigned by Harbour Police or ship's Agent will act in emergencies.

TELEPHONE: Local telephones available to be placed on board.

GENERAL: Shore pass issued by Immigration for each Crew member on ship's arrival and will be collected on ship's departure. Anyone who loses a shore pass is subject to fine.

SHORE-LEAVE: Crew allowed ashore except for Crew members from Communist countries.

REGULATIONS: Searching for stowaways is strictly carried out on arrival and departure.

Discharge of smoke, tank washings, garbage, etc., not allowed.

DELAYS: Keelung has rainfall on about 210 days in a year, port is sometimes congested after continuous rain.

AUTHORITY: Keelung Harbour Bureau.

SUAO: 24.36 N. 121.51 E.

SHIPMASTER'S REPORT: February 1979.

PORT LIMITS: Radius of 1 mile from North Point Lighthouse.

DOCUMENTS: Ship's Register. Derat Certificate, Last Port Clearance, Taiwan Tonnage Dues Certificate (valid 1 year), Crew List (8 copies), Stores List, Vaccination List and Yellow Book, Foreign Currency in Safe, Narcotics List, Bills of Lading, manifest of Inward Cargo, manifest of Through Cargo, Mail and Parcels List. Also see "General".

PILOTAGE: Compulsory, at anchorage hoist "G" flag.

ANCHORAGE: Water area from North shore to South shore, depth 14 to 31 m. and outer depth over 30 m. Ship may anchor and remain outside breakwater (under construction) when waiting for Pilot, or entry instructions.

RESTRICTIONS: Permission to enter must be granted by naval signal station located on North shore, ship's Agent should give ship's ETA to Port Authority of Keelung 24 hours before arrival. Port closes from 0001 to 0500 hrs. daily.

MAX. SIZE: Max. draft 10 m. and LOA less than 150 m. (7 berths under construction).

HEALTH: Radio pratique not possible. Quarantine will clear vessel in anchorage area. Stool test will be conducted if vessel arrives from an affected area within five days.

RADIO: Radio Keelung, send cables to Harbour Master Keelung, or Agent. Report ETA, draft, etc.

VHF: Channel 16 – 156.8 mHz for calling. Call sign "Keelung Harbour Radio".

TUGS: Port Authority tugs assist with mooring and unmooring. Ship's lines used.

BERTHING: Docking during daytime and sometimes at night time, Pilot compulsory. Vessel usually anchors in outer harbour for pratique and inspection.

SPECIALIZED CARGO HANDLING FACILITIES: The port has no special facilities for bulk and container handling cargoes, but will have by 1981. For the present time ship's derrick only for logs, timber, cement and general cargo.

STEVEDORES: Arranged by local Agent.

MEDICAL: Clinics with English speaking doctors available, modern hospitals available in Lotung, Ilan and Taipei by train or by car, 20 minutes, 30 minutes and 2 hours away respectively.

DENSITY: 1025.

FRESH WATER: Available, subject 24 hours advance notice.

FUEL: Bunkers available in Keelung, but this port requires 7 days advance notice. Fuel barge operated by C.P.C.

DEVELOPMENTS: First stage of five year development plan being carried out. After completion which is expected in 1981, every year cargo handling quantity will be 6,300,000 tons. 7 new deep water berths including 2 container berths, will be completed in 1981.

GANGWAY/DECK WATCHMEN: Harbour policeman always assigned by Authority for gangway, free of charge.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CERTIFICATES: International certificate, safety equipment, safety construction, safety radio, load line, cargo gear, etc.

CUSTOMS ALLOWANCE: Each Crew member allowed 200 cigarettes for own use and one bottle of wine for entertaining and for own use, Master enjoys some privileges and can keep additional cigarettes for entertaining.

IDENTIFICATION CARDS: Shore pass for the foreigners issued by immigration office according to the passport or other indentification papers.

CONSULS: None.

REPAIRS: Minor repairs can be carried out in port.

REPATRIATION: Crew repatriation usually carried out through international airport in Taoyuan, near Taipei.

AIRPORT: International airport in Taoyuan, 1.5 hours by car from port.

TIME: GMT plus 8 hours. For local time check in Chinese, dial telephone 117 (free of charge).

HOLIDAYS: New Year's Day (1st–2nd, January), Lunar New Year's Days (2 days in February), Youth Day (29th March), Labour Day (1st May), Confucius Birthday (28th September), National Day (10th October), Taiwan Restoration Day (25th October), Dr. Sun's Birthday (12th November), Constitution Day (25th December).

POLICE/AMBULANCE/FIRE: The gangway guard assigned by harbour police or ship's Agent will act in emergencies; in case of fire dial 119. Police and ambulance dial 110.

TELEPHONE: Local telephones available to be placed on board.

GENERAL: 3 Crew Lists sent by airmail from last port to Agent. Shore pass issued by immigration office for each Crew member on ship's arrival and will be collected on ship's departure.

SHORE LEAVE: Crew allowed ashore, except for Crew members from Communist countries.

REGULATIONS: Crew cannot shelter any unlawful person on board. Searching for stowaways is strictly carried out on arrival and departure.

DELAYS: Port is sometimes congested after continued rain and delays of a few days may be caused.

AUTHORITY: Harbour Master or Ministry of Communications, Taipei.

24.15½ 120-30

TAICHUNG: 24.17 N. ~~119.30~~ E.

SHIPMASTER'S REPORT: February 1979.

PORT LIMITS: Radius of 1.5 miles from centre of the entrance between North and South breakwater.

DOCUMENTS: Ship's register, safety equipment, safety construction, safety radio, load line, derat certificate, sanitary certificate, last port clearance, Taiwan tonnage dues (valid 1 year), crew list, passenger list, vaccination list and yellow book, stores list, foreign currency in safe, narcotics list, arms and ammunition list, bills of lading, manifest of inward cargo, manifest of through cargo, mail and parcels list. Also see "General".

PILOTAGE: Compulsory, at anchorage hoist "G" flag, contact Taichung port radio on VHF Channel 16.

ANCHORAGE: Water area in port limits, except entrance channel, can be used for anchoring, depth from 10 m. to 20 m. Ship may anchor and remain outside breakwater when waiting for Pilot.

RESTRICTIONS: Permission to enter must be granted by signal station. Ship's Agent to report ETA to Port Authority 24 hours before arrival. Port closed from 0001 to 0500 hrs. daily.

MAX. SIZE: Max. draft 10 m. and LOA less than 150 m., (second stage 7 berths under construction).

HEALTH: Radio pratique acceptable, also quarantine will clear vessel at anchorage. Stool test will be conducted if vessel arrives from an affected area within 5 days.

RADIO: Via Radio Keelung or Radio Kaohsiung. Send cables to Agent or "Harbour Master Taichung" report ETA, draft, etc.

RADAR: No radar service to assist navigation in port.

VHF: Channel 16 (156.8 mHz) for calling purposes, call sign "Taichung Port Radio". VHF is used on ship's arrival. Pilots use walkie-talkies to communicate with tugs and mooring men on dock.

TUGS: Authority tugs assist mooring and unmooring, ship's line used.

BERTHING: Docking during daytime and sometimes night time, Pilot compulsory, vessels usually anchor outside the breakwater for pratique and inspection. But if radio pratique granted, vessel can enter port. Contact signal station by VHF to get instructions.

SPECIALISED CARGO HANDLING FACILITIES: Container terminal handling equipment includes straddle carriers for handling 20 to 40 ft. containers (under construction).

STEVEDORES: Owned and operated by Port Bureau.

MEDICAL: Clinics and hospital with English speaking doctors available at City of Taichung, 30 km. from port.

DENSITY/TIDE: 1023/High tide and low tide difference 4.5 m., when alongside pier keep watch on moorings.

FRESH WATER: Available, no limitation on quantity.

FUEL: Ordinary bunkers available but 3–5 days advance notice required. Fuel barge operated by C.P.C.

DEVELOPMENTS: The second and third stage development plan is being carried out. After completion which is expected in 1983 cargo handling capacity will be 12,000,000 tons per year.

GANGWAY/DECK WATCHMEN: Harbour policeman always assigned by authority at gangway free of charge.

OPENING/CLOSING HATCHES: Normally carried out by stevedores, except new designs on modern vessels.

CUSTOMS ALLOWANCE: Each Crew member allowed 200 cigarettes and 1 bottle of wine for own use. Bonded store will be sealed on arrival.

IDENTIFICATION CARDS: Shore pass for foreigners issued by Immigration Office according to the passport or other identification papers.

CONSULS: None.

REPAIRS: Minor repairs can be carried out in port.

REPATRIATION: Crew repatriation usually carried out through international airport in Taoyuan near Taipei, or Kaohsiung. About 200 km. from this port.

TIME: GMT plus 8 hours. For correct local time dial tel. 117, time report in Chinese, free of charge.

HOLIDAYS: New Year's Day (1st–2nd January), Lunar New Year's Day (2 days February), Youth Day (29th March), Labour Day (1st May), Confucius Birthday (28th September), National Day (10th October), Taiwan Restoration Day (25th October), Dr. Sun's Birthday (12th November), Constitution Day (25th December).

POLICE/AMBULANCE/FIRE: The gangway guard assigned by harbour police or ship's Agent will act in emergencies. Fire and ambulance tel. 119. Police tel. 110.

TELEPHONE: Local telephone available to be placed onboard.

GENERAL: 3 crew lists airmailed from last port to the Agent, shore pass issued by immigration officer for each Crew member on ship's arrival and will be collected on ship's departure.

POLLUTION: Harbour Master prohibits discharge of tank washings, etc. in port.

SHORE LEAVE: Crew allowed ashore except for Crew members from communist countries.

REGULATIONS: Searching for stowaways is strictly carried out on arrival and departure.

DELAYS: Strong monsoon winds and heavy swell in the Winter, and in Summer approaching typhoon may cause congestion and delays for a few days.

AUTHORITY: Harbour Master, or Ministry of Communications, Taipei.

NOTES

Please also advise Shipping Guides Ltd.

Tanzania

GENERAL: *All Ports: (Ship's Officer's Report):* The Boarding Customs require crew declarations on their special form duly signed by each individual member of crew. The excess private property or the items not required during the ship's stay in port, are to be collected and placed in a locker or room and sealed by the Customs. This seal has to be kept intact even in the case of the vessel sailing from Tanzania to Kenya or vice versa. On arrival at the next port, the previous Custom's seal is replaced by the local authorities. No new crew declaration is needed if once filed at first port. However, it is recommended that an extra copy of the crew declaration is kept on board as a record in case it is requested by the local authorities.

CHAKE CHAKE: 05.14 S. 39.46 E.

DOCUMENTS, HEALTH: Refer to "Zanzibar", where vessel required call for clearance by Port Officals.
PILOTAGE: Not compulsory, but restricted to daylight only.
RESTRICTIONS: Entrance approached through Owen Channel or through passage between Mesale Island South and Ras Kingojelin. Depths from 10 to 22 fathoms but there are patches of 2.5 fathoms. Narrowest part of channel is 1.5 cables wide.

Vessels may enter and leave at any state of the tide, but in daylight hours only.
ANCHORAGE: No mooring buoys. Vessel's work cargo to lighters. Depth decreases to 3 fathoms for coastal anchorage off Ras Banani.
MAX. SIZE: 170 ft. length: 15 ft. draft.
TUGS: Not available and not required.
FRESH WATER: Not available.
FUEL: Not available.
AUTHORITY: See "Zanzibar".

DAR-ES-SALAAM: 06.50 S. 39.17 E.

PORT LIMITS: The port of Dar-es-Salaam includes all tidal waters enclosed by a boundary which, commencing at high water mark at a point S.E. of Ras Koronja (approximately 9.66 km. East of the city of Dar-es-Salaam), follows a straight line due North to the West tip of the Outer Sinda Island. Thence a straight line to Makatumbe Lighthouse, thence a straight line drawn to South tip of Mbudya Island, thence a straight line drawn 254° to the high water mark at a point on the mainland South of the entrance to Mto Peremji. Thence following the high water mark around Msansani Bay, Dar-es-Salaam Inner Harbours to the first point due South of Outer Sinda Island.
DOCUMENTS:

Health Certificates (forms supplied by Pilot).
6 Crew Lists.
10 Passenger Lists.
Ships Manifest.
Heavy Lift List.
Dangerous Cargo List.
Ship's Register.
Declaration and Advice of Consumable Stores (Form C-7 supplied by Customs).
Crew Declaration (Form C-8 supplied by Customs).

PILOTAGE: Compulsory South of Makatumbe lighthouse, for all vessels over 200 n.r.t. The pilot launch is painted white and shows the conventional day and night signals.Vessels wishing to enter must await the arrival of the pilot launch at the Outer Anchorage, and, if necessary, must anchor clear of the leading marks. During the hours of darkness ships entering or leaving the port are limited to 485 ft. LOA on tides not exceeding 9 ft. range.
ANCHORAGE: Anchorage outside in 7-8 fathoms, sheltered by Nakatumbe Island during S.W. monsoon but exposed to swell in N.E. monsoon.

Shipmaster's Report: In good weather tankers waiting can anchor in a depth of 18 m., 12 cables from Makatumbe Light true bearing 250°.
RESTRICTIONS: Movements in and out of the basin are subject to restrictions depending on drafts and state of the tide at Spring tides. Tankers, vessels over 135 m. LOA and vessels carrying explosives are not allowed to leave or enter during hours of darkness.

There is a signal station (with tower, flagstaff and red roof) on East Ferry Point (Lat. 6° 50' S, Long. 39° 18' E.). Entry prohibited signals are: day signal – black flag on masthead; night signal – 3 red lights disposed vertically, and distant signals – black square on white background.

The entrance channel at North end of the basin is about 1.25 miles in length from its outer entrance between the edges of the banks fronting North and South Reefs to the Inner Harbour, South of West Ferry Point.

There is a sharp bend in the channel at West Ferry Point. Minimum depth of 6.7 m. LWOST, and minimum width of 128.02 m. between the 4 fathoms contour lines. A very strong ebb and flood runs through the channel at periods of Spring tides. Maximum current at Spring tides – 3.5 knots. During period of S.E. monsoon strong winds and heavy seas may make entry difficult, but in Inner Harbour port working is normally unaffected by weather.
MAX. SIZE: Twin-screw vessels not exceeding 182.9 m. Draft 10.1 m. at HWOST, 7.0 m. at LWOST, and 9.1 m. at HWNT and single-screw vessels not exceeding 175 m. Tankers LOA 175.26 m., 36,000 d.w.t., and draft 9.75 m. Also refer to "Mjimwema".
HEALTH: Radio Port Health officer giving ETA, name last port and health condition of passengers and crew. "Q" flag to be displayed until free pratique given.
BERTHING: In the Inner Harbour there are mooring and anchorage berths for up to 9 deep-sea ships ranging from 350 ft. to 600 ft. (106.48 – 182.88 m.) in length and from 23 ft. to 30 ft. (7.01 – 9.14 m.) in draft.

Deep water quays total length 2,013 m. comprising berths numbers 1-11 with 10.06 m. in depth at LWOST.

Accommodation:

Harbour sheltered and roomy, water area 95.9 ha; consists of tidal basin and Southern Creek, the latter having 11 deep-water berths. Anchorage in basin and creek.

		Depth	*Max. length*
"A"	Stern mooring	9.1 m.	183 m.
"B"	Moored Mooring	7.6 m.	153 m.
"C"	Moored mooring	7.6 m.	183 m.
"D"	Single Anchor	7.3 m.	183 m. waiting berth only.
"F"	Moored, buoys and anchor	7.3 m.	152 m.
"G"	Buoys	7.3 m.	168 m.
"H"	Buoys	7.1 m.	168 m.
"K"	Moored, buoys and anchor	9.1 m.	183 m.

In addition there are 2 coaster anchorages. The Southern Creek, at the South-east corner of the basin had a navigable distance of 1.5 miles for ships drawing up to 30 ft. of water.
CARGO HANDLING FACILITIES: The port has no special facilities for bulk handling cargoes but, subject to advance notice being given, vacuvators and grabs can be made available.

Equipment and other facilities:

Deep water vessels berthed in stream are loaded and discharged by lighters. At the lighter quay there are 8 electric portal cranes for working the lighters (1 × 5-ton and 7 × 3-ton), on the main quay, the port has 6 × 7-ton and 21 × 5-ton. There are 8 other portal cranes on the stacking yards as per details below:

(a) Belbase (AMI) — 2 × 10-ton cranes.
(b) Tanzania — 3 × 5-ton cranes.
(c) Yard 5, 6 & 7 — 1 × 7-ton and 1 × 7-20 ton Gosna Cranes
(d) Yard 8 — 1 × 5-ton Conrad.

11 other Canadian portal cranes are still under construction at yard 8/9.

Mobile Cranes: 2 × 30-ton, 13 × 11 – 7-ton, 14 × 6-ton, 2 × 4-ton and 1 × 60-ton (Floating Crane – "Kifaru"). These are moved between deep-water quays, lighterage quays and any other points of work on the stacking yards as and when required.
DENSITY: 1025.
TANKERS: Bulk Oil Jetty at which tankers up to 175.26 m. LOA, and 9.75 m. draft can discharge to tanks ashore. Depth alongside of 10.06 m. There is a refinery on the opposite side of the creek to the Bulk Oil Jetty; the tankers serving the refinery are not to exceed 20,000 s.d.w.t. capacity. Also refer to "Mjimwema".
STEVEDORES: Week days (except Saturday) 0700–1500 hrs. (45 minutes break), 1500–2200 hrs. (no break), 2200–0600 hrs. (no break). Saturdays 0700–1345 hrs. (no break), 1400–2100 hrs. (no break). Sundays and public holidays 0700–1500 hrs. (45 minutes break), 1500–2200 hrs. (no break).
FRESH WATER: Available at deep-water berths, and a water barge supplies water to ships at anchorage. All water is chlorinated but should be boiled and filtered. Water for boiler requires feed treatment (formal solutions adequate).
FUEL: Not generally available.
MEDICAL: Doctors and good modern hospital facilities exist.
DEVELOPMENTS: 3 more deep-water berths are under construction with an option of 2 more.
REPAIRS: Several light engineering workshops. There is a Tanzania Harbour Authority Dockyard for construction and maintenance of Tanzania Harbour Authorities lighters and other small craft. This has a slipway for vessels up to 100 ft., lifting power 100 tons. The Port Administration employs a skin diver.
REPATRIATION: Can be arranged.
CUSTOMS ALLOWANCE: Each crew member is allowed 1 carton of cigarettes, 1 opened bottle of spirits and 8 small beers.
AIRPORT: International airport with daily connections to all parts of the world.
TIME: GMT plus 3 hours. No alterations.
HOLIDAYS: Christmas Day and International Workers' Day are the only holidays on which no work is performed. Other holidays on which restricted working may be carried out are: Zanzibar Revolutionary Day (January 12th); Id-el-Fitr (2 days); Id-el-Haj; Good Friday; Easter Monday; Union Day (April 26th); Maulidi Day; Saba Saba Day (July 7th); Tanganyika Independence and Republic Day (December 9th).
SHORE LEAVE: Allowed.
DEVELOPMENTS: Future plans of the port include the construction of 2 additional deep water berths Nos. 12 and 13, expansion of the dockyard capable of dry docking tugs, small ships up to 1,500 d.w.t. A new oil jetty will be constructed to give way for

the construction of 2 additional deep water berths. Straightening, widening and deepening of the entrance channel to at least 10 m. depth will enable vessels of up to 35,000 d.w.t. to enter the port at all times of the day. It will also enable night pilotage to all types of ships which at present is restricted to vessels of up to 135 m. in length only.

AUTHORITY: Tanzania Harbour Authority.

MJIMWEMA TERMINAL: 06.49 S. 39.22 E.

DOCUMENTS and all General Information; refer to "Dar-es-Salaam".

LOCATION: The position of the Mono Buoy is Lat. 6° 49′ 20″ South, Long., 39° 22′ 00″ East, lying approximately 1.5 miles offshore in Mjimwema Bay. The buoy lies in 24 m. depth of water. The currents are up to about 1 knot and the direction varies.

PILOTAGE: Mooring Master/Pilot boards in an approximate position Makatumbe Island lighthouse bearing 240°. True distance 3.5 miles. Should the Pilot not be available on arrival, vessels are advised to keep underway and await the Pilot rather than anchor.

After mooring operations a Mooring Master/Pilot will remain on board.

Vessels must provide adequate means of boarding for Pilot, Customs and other officials. A pilot ladder with spreaders 4 ft. from the water and manropes are required.

The Mooring Master shall be provided with meals and accommodation comparable to a senior officer on board. The crew of the mooring launch will be provided with food comparable with ratings on board. No special foods need be provided.

RESTRICTIONS: Initially, berthing and unberthing will be in daylight hours only. It is expected after experience is gained that there will be no pilotage restrictions. It is anticipated that after the first few departures, night departures will be allowed and night arrivals may later be allowed at the discretion of the Harbour Master.

MAX. SIZE: The Mono Buoy accommodates tankers up to 100,000 tons d.w.t. Min. length allowed, 650 ft. Max. draft allowed, 55 ft.

HEALTH: Customs, Port Health and Immigration will board vessels on arrival.

RADIO: Within 6 hours of clearing the loading port, each tanker shall provide the Agent with the following information:

- *(a)* Name of Ship.
- *(b)* Name of last port from which the vessel cleared and the loading port if different from above.
- *(c)* Estimated date and time of arrival at Dar-es-Salaam (Mjimwema).
- *(d)* Cargo loaded.
- *(e)* API gravity.
- *(f)* Arrival draft, fore and aft.
- *(g)* Lifting capacity of derricks.
- *(h)* Size of manifolds.
- *(i)* Personnel requirements.

72 hours from the pilot station, a second cable should be sent to Agent with following information:

- *(a)* Name of ship.
- *(b)* Amended time of arrival.
- *(c)* Names of crew leaving the vessel (if any).
- *(d)* Requirements of doctor and dentist.
- *(e)* Any other requirements.

A final cable should be sent about 36 hours from the pilot station giving finally amended ETA.

When within 20 miles of Dar-es-Salaam Signal Station vessel should call the Signal Station on either Channel 12 or 16. A continuous watch is kept on both channels. Call sign is Dar-es-Salaam Signal Station.

VHF Channels 16 calling, 12 berthing. VHF Channel whilst discharging to be decided.

Portable radios can be provided for vessels not having a VHF set and the Agent should be so informed in order to allow time to dispatch a portable radio on arrival. A vessel arriving without suitable means of communication and not having informed the Agent of the fact could incur delays which would be to ship's account.

The Mooring Master will be in direct control of all radio communications on the vessel while in the terminal area. Any unauthorised communications may result in the immediate cessation of all operations and removal from the berth.

READINESS: Notice of readiness will only be accepted by the Pilot/Mooring Master on behalf of the Harbour Authority, when the ship is berthed and connected.

Any vessel which is not, in the opinion of the berth controller, ready in all aspects to discharge, may be rejected until corrections are made. The Harbour master's decisions are final.

BERTH: The Mono Buoy is a single point mooring buoy. The body of the buoy being secured in a fixed position with 6 moorings and the top of the buoy is in the form of a turntable allowing the ship, moorings and hoses to take up the position the vessel lies naturally due to tide, wind and current conditions.

MOORING: The following equipment is required to moor with safety: Two 10-in. nylon circumference ropes. 100 ft. in length. 4 end joining shackles.

The vessel approaches the Mono Buoy head to wind and tide or the resultant of these forces, and should have 2 mooring ropes lowered to the water, each having a 15 ft. lashing of 3-in. rope on it.

As the vessel nears the mooring, a launch will take the port rope from the ship and connect it to the port pick-up rope and return to the ship to take the starboard rope and repeat the operation on that side.

The vessel should heave on the ropes as soon as they are inboard and heave herself to the buoy until the chain is on the fairlead. The ship wire should then be shackled to the chain and turned up on bits. This applies to both sets of moorings.

HOSES: Raising and lowering of, connecting and disconnecting of hoses as well as other shipboard duties will be performed by the ship's crew under the advice of the Mooring Master. The ship should be capable of lifting 10 tons on her derrick, with a minimum of 7.5 tons.

When the vessel is securely moored, the launch will bring the hoses alongside on the port side. The vessel will lower the cargo hook to the boatman who will hook it on to the lifting ring on the forward hose. The hose will then be lifted to full height on the boom and secured on the "Hang off Chains" supplied. The hose is then lowered to the deck and the operation repeated with the after hose.

After completion of discharge the hoses will be filled with sea water by the ship. The hoses can then be disconnected from the manifold and lifted over the side of the ship and hung there on the slip ropes to be slipped off simultaneously with the moorings. This last operation will be carried out on the advice of the Mooring Master.

UNMOORING: On sailing, hoses will already have been disconnected and ready to be slipped at the direction of the Mooring Master.

The weight will be taken on the 2 approach ropes by heaving slowly with the winch. The shackles will then be released and the ropes slacked away until they are finally paid out through the fairlead and dropped into the sea.

The shore equipment should then be collected together under the derrick and returned to the boat.

BALLAST: Ballasting will be allowed during discharge but only with the express permission of the berthing controller, and in the case of ballasting in dirty tanks a dry certificate must be issued. Vessels will not be allowed to tank clean. There are no sludge tanks ashore.

FUEL: No bunkers available.

FRESH WATER: Only very limited quantities of fresh water in the region of about 50 tons can be provided.

STORES: Stores are available in Dar-es-Salaam, but the Tanzania Harbours Authority cannot undertake to transport stores to the Mono Buoy. Transport of stores to the buoy will be the responsibility of the Agent.

REPAIRS: During periods of calm and the fact that there is little current, it is foreseen that the problem of riding up on the buoy may occur. The vessel's engines shall therefore be available at all times and the telegraph shall be on stand-by while the vessel is in the berth. Engine repairs are not permitted. Should a vessel not be able to use her engines the cargo will be stopped and the vessel towed to a safe anchorage at the vessel's cost, until she can safely return to the berth.

SHORE LEAVE: Shore leave will not be permitted. Should any of the crew require to be landed for medical or relief reasons, the Agent will be reponsible for providing transport to the Inner Harbour. Tanzania Harbours Authority craft will on no account be available to ferry crew members to and from the passenger pontoon. The Mono Buoy lies 4.5 miles from the passenger landing pontoon, which is situated in the Inner Harbour.

POLLUTION: It is the Master's responsibility to see that no oil of any kind is pumped or spilled overboard from his vessel. This includes oily water from bilges, crude residues from the previous voyages or any other matter that may result in the pollution of the area. Owners and Masters should comply with any international regulations and recommendations concerning the prevention of pollution of the sea.

Serious consequences will arise if the above rule is broken. All costs and expenses involved will be for the account of the vessel concerned and the Master may be prosecuted under the Tanzania Merchant Shipping Act.

REGULATIONS: While in the berth the vessel should provide a pilot ladder on the opposite side of the vessel to the gangway, secured at the rail and ready for use.

No boats of any kind shall be lowered without permission from the Customs, Immigration and Harbour Master, except in an emergency.

Tanzania Harbours Authority maintains vessels to assist in berthing. These vessels are under the direct supervision of the Mooring Master/Pilot. Any service or facility provided by the Tanzania Harbours Authority, including the services of the Mooring Master/Pilot and boats are the vessel's risk. The furnishing of Mooring Master/Pilot and launches or other services and facilities shall not be construed to be or give rise to a personal contract.

AUTHORITY: Harbour Master, Dar-es-Salaam, for Port Manager.

MKOANI (KOHANI): 05.21 S. 39.38 E.

DOCUMENTS, HEALTH: Refer to "Zanzibar."

PILOTAGE: No pilot available.

RESTRICTIONS: Vessels passing through channel between Zanzibar and Pemba should inform Port Authorities 24 hours in advance.

Entrance through Mkoani leading marks, buoyed and well-lit channel, depth of 11 fathoms. Vessels may enter and sail any time night and day.
ANCHORAGE: No mooring buoys. Min. depth 6 fathoms. Vessels work cargo to lighters. Sandy bottom with mud close inshore.
MAX. SIZE: Length 250 ft.
TUGS: Not available and not required.
FRESH WATER: Not available.
FUEL: Not available.
AUTHORITY: See "Zanzibar".

MTWARA: 10.16 S. 40.12 E.

DOCUMENTS, HEALTH: Refer to "Dar-es-Salaam".
PILOTAGE: Compulsory. Pilot based at Dar-es-Salaam and flys to Mtwara when required. Flights once daily except Wednesdays. Early information concerning ETA to Harbour Master, Dar-es-Salaam. (South-bound vessels requested to divert to Dar-es-Salaam to embark Pilot).

Pilot boards 0.5 mile North of Shangani Reef Buoy from tug.

Signal Station can be contacted on VHF, Channels 12 and 16, between 0800 and 1800 hrs.
APPROACHES: The entrance is approached by a channel marked by buoys and leading beacons. At its narrowest point abreast of Msemo spit the channel is 1.5 cables wide. In spite of the sharp turn in this vicinity, vessels of up to 175.26 m. in length can enter the harbour at all stages of the tide. Once around the Msemo spit there is a very good natural harbour with room for two moderately large vessels and one coaster alongside. There are six marked anchorages to accommodate vessels of up to 9.5 m. draft.
ANCHORAGE: No safe anchorage outside port.
RESTRICTIONS: Port closed from 1800 to 0600 hrs. No tidal restrictions.
MAX. SIZE: Length 575 ft., draft 32 ft.
RADIO: Dar-es-Salaam or Mombasa Radio.
TUGS: Join vessel off Signal Station. Tug's lines used.
BERTHING: Deep-water Quay; 1,248 ft. length; 9.75 m. depth alongside at low water. Two berths available at quay.
CARGO GEAR: Vessels load/discharge using ship's gear.
STEVEDORES: Stowage plan required preferably before ship's arrival. Small coasters use the ports mobile cranes.
MEDICAL: Doctor available. All crew require valid smallpox vaccination and yellow fever inoculation certificates.
DENSITY: 1025.
FRESH WATER: Not normally available.
FUEL: Not available.
GANGWAY/DECK WATCHMEN: Arranged by Agents.
IDENTIFICATION CARDS: Required.
REPATRIATION: Possible.
AIRPORT: 7 miles distant. Daily service to international airport.
TIME: GMT plus 3 hours.
HOLIDAYS: All holidays worked as Sunday except following when no work done: Christmas Day and 1st May.
TELEPHONES: Direct connection on board not possible.
SHORE LEAVE: Crew allowed ashore.
AUTHORITY: Tanzania Harbours Authority, Dar-es-Salaam.

TANGA: 05.04 S. 39.08 E.

PORT LIMITS: From high water mark at Ras Kwawa 090° to the meridian of 39° 15' E., thence 180° to the parallel of Lat. 5° 05' S., thence 270° to the mainland at high water mark. Time of anchorage within port limits to constitute an "arrived vessel".
DOCUMENTS, HEALTH: Refer to Dar-es-Salaam.
PILOTAGE: ETA required via Mombasa Radio, if not given by Agents at previous port of call. Pilot embarks from white launch in vicinity of Ulenge Beacon on Ras Kazone leading line. Pilot ladder required on port side in N.E. monsoon, and on starboard side in S.W monsoon.

Vessels wishing to enter must await the arrival of the Pilot at the outer anchorage and, if anchored, must anchor well clear of the leading lines.
APPROACHES: Tanga is approached from the S.E. through channel in line with Ulenge leading marks bearing 319° T. A 3 fathom bank to starboard is marked by ship channel buoy. Care should be taken in this vicinity as there is frequently a strong set to the N.E. On the port hand, Niule Reef is marked on Northern tip by a buoy. After passing Niule Reef Beacon it is necessary to turn to port on to Ras Kazone leading marks bearing 266° T. until Ulenge Beacon is sighted.

A signal station is situated immediately below Ras Kazone High light. Signals are exhibited to indicate if inner channel to harbour is clear. Morse lamp messages may be exchanged with incoming vessels.

Late afternoon arrivals to Tanga may encounter poor visibility of land marks due to haze from setting sun, but a chimney on the fertiliser factory site on Ras Kazone with 3 vertical red lights at a height of 100 m. is conspicuous.
RADIO: Mombasa Radio. Ras Kazone Signal Station keeps 24 hour VHF watch on Channel 16, working on Channel 12.
ANCHORAGES: Tanga has no deep water berths. It is a lighterage port where ships are worked at anchor in the stream. Eleven safe anchorages have been marked by means of beacons. The inner harbour provides 7 anchorages for use by deep sea vessels with length of up to 213 m., and drafts of between 6.4 m. and 9.5 m.

The outer harbour has 3 anchorages with drafts well over 9.45 m.

Incoming vessels without Pilot should not anchor within 1 mile of Ras Kazone.
BERTHING: All except bulk cargo work is carried out at anchor. Vessels are not berthed in Inner Harbour during hours of darkness except by special request in cases of urgency. 35 lighters available, capacity up to 250 tons each.
CARGO-HANDLING FACILITIES: One 20-ton fixed crane is available on lighterage wharf for heavy lifts. A jetty on the Eastern side of Ras Kazone provides 1 berth for vessels of 20,000 dwt. equipped for the discharge of bulk cargoes and liquid ammonia. Two portal cranes of 7 tons capacity fitted with grabs. Jetty currently handling bulk products for fertiliser factory.

5 new cranes have been assembled and will be put into operation as soon as the berth modifications have been completed.
PASSENGER FACILITIES: All passengers and visitors to ships pass through the customs passenger terminal at the Eastern end of the new lighter wharf, and embark or disembark from the pontoon landing stage. Private hire launches available.
FRESH WATER: Not available.
FUEL: Not available.
GENERAL: Refer to "Dar-es-Salaam" for all general information.
AUTHORITY: Tanga Port Manager.

WETE (Pemba): 05.14 S. 39.43 E.

DOCUMENTS, HEALTH: Refer to Zanzibar.
PILOTAGE: Not compulsory, but restricted to daylight only. Vessels passing through channel between Zanzibar and Pemba should inform Port Authorities 24 hours in advance.
RESTRICTIONS: Entrance through Uvinje Cap, channel depth decreasing to 11 fathoms, with shallow patches to be avoided. Narrowest part of channel is 1.5 cables wide. Vessels may enter and leave at any state of tide but in daylight only.
ANCHORAGE: No mooring buoys, Vessels work cargo to lighters. Depth decreases to 2.5 fathoms. Mud bottom.
MAX. SIZE: 240 ft. length; 25 ft. draft.
TUGS: Tug and 1 Labour boat.
LIGHTERS: 3 lighters of 200 tons each.
6 lighters of 100 tons each.
FRESH WATER: Not available.
FUEL: Not available.
AUTHORITY: See "Zanzibar".

ZANZIBAR: 06.09 S. 39.11 E.

DOCUMENTS:
Bill of Health.
3 Crew Lists.
6 Passenger Lists.
3 Cargo Manifests.
3 Customs Manifests.
PILOTAGE: Compulsory. Vessels approaching from English pass embark Pilot at Seagull Buoy, and vessels approaching from South pass meet Pilot at Penford Buoys. Pilot takes vessel in and out, day and night. Notice of ETA required 6 hours in advance. Pilot on VHF Channel 16.
ANCHORAGE: Six anchorages to accommodate vessels drawing up to 32 ft. Additional anchorage provided for vessels carrying explosives.
RESTRICTIONS: Two entrances, English pass and South pass. The former is approximately 1 mile wide and has min. depth of 6 fathoms and 4 ft. and a very narrow angular turning corner of 1.7 cables width. South pass wider and deeper than English pass. Passes are well buoyed and lighted. In English pass, tidal stream runs North and is stronger on ebb than on rising tide. South pass, tidal stream runs N.N.W. and stronger on flood than on ebb-tide. Vessel may enter or leave at any state of tide at any time.
MAX. SIZE: (Anchorage) Length 1,100 ft., beam 110 ft., draft 32 ft.
HEALTH: Pratique given by Quarantine Officer who boards on arrival. All crew required to be in possession of valid smallpox vaccination and yellow fever inoculation certificates.
TUGS: 3 tugs and 2 labour boats.
BERTHING: Concrete pile wharf 800 ft. long to North of Ras Shangani used mainly for lighterage purposes and for berthing Government coasters. Under special circumstances, upon prior request to Port Officer, vessels of less than 375 ft. length and drawing less than 20 ft. may be permitted to berth alongside, but due prevailing onshore winds this practice not encouraged.
STEVEDORES: Normal working hours Monday to Thursday, 0700 to 1500 hrs. Friday 0700–1200 hrs.

Work can be extended on overtime for a second shift up till 2300 hrs.

Average rates: bagged cargoes 15 tons per gang hour, general cargo 8 tons per gang hour.

LIGHTERS: 2 lighters, open at the top for heavy equipment 280 tons each.

2 lighters for bag and general cargo, each with a capacity of 300 tons.

5 lighters for bag and general cargo, each with a capacity of 200 tons.

5 lighters for bag and general cargo, each with a capacity of 150 tons.

6 lighters for bag and general cargo, each with a capacity of 100 tons.

FRESH WATER: There is one water barge of 250 tons capacity. Water can be supplied at the wharf by wharf hydrant or at the anchorage in the stream by water barge.

FUEL: Not available.

AUTHORITY: Serikali ya Zanzibar, Port and Marine Dept.

NOTES

Please also advise Shipping Guides Ltd.

Thailand

BANGKOK: 13.42 N. 100.34 E. (See Plan Book)

KOHSICHANG:

North-east Monsoon 13.09 N. 100.50 E.
South-west Monsoon 13.11 N. 100.50 E.

PORT LIMITS: A vessel is normally considered to be an "arrived ship" on passing the Paknam Customs Station.

DOCUMENTS: Ship's forms: Crew List; Passenger List; Store List; List of arms and ammunitions for ship's use; List of Arms and Ammunitions in possession of passengers; List of opium and harmful habit-forming drugs; List of crew private belongings (cigarettes, radio, gramophone, camera, etc., including foreign currencies and liquors); Dangerous Cargo List; List of heavy lifts; Stowage plan; Inward cargo manifest; Transit cargo manifest; Through Cargo manifest; list of containers.

Documents to obtain from officials and agents: Immigration forms No. 3, 4 and 35, obtainable from Agents. International Maritime Declaration, obtainable from Quarantine Officer.

APPROACHES: The entrance of the river Chao Phraya is marked by the Bangkok Bar light beacon situated at the Lat. 13° 26′ 24.3″ N., Long. 100° 35′ 48.1″ E. Sea-going vessels have to cross the bar at the mouth of the river through an 18 km. long bar channel, which is dredged to a depth of 8.5 m. from MSL (mean sea level), and a bottom width of 100 m. in the straight section and 250 m. in the curve.

The depth of the river within the port area varies from 8.5 m. to 11 m. from MSL.

The MSL at the Bangkok Bar and at Klongtoi is 2.3 m. and 1.63 m. above lowest low water respectively.

At present the limiting length of vessels entering the port is 172.2 m. (565 ft.). The limiting draft of vessels will be determined by the bar adder plus the depth of water (predicted in the Tide Table published yearly by the Hydrographic Department RTN) from LLW at the Bangkok bar, but the max. draft of vessels allowed to cross the bar is not over 27 ft.

The MSL at the Bangkok Bar and at Klongtoi is 2.3 m. and 1.63 m. above lowest low water respectively.

PILOTAGE: Compulsory at Bangkok; Kohsichang not required; Advance notice required 48 hours prior to arrival.

Location Pilot vessel Bangkok: Lat. 13° 23′ 33″ N., Long. 100° 35′ 12″ E. Area waiting pick-up Pilot will be anchorage close to Pilot vessel, preferably 500 to 600 m. from Pilot vessel, enabling Pilot boat to get alongside safely. Pilot vessel marked by white flashing light every 2 seconds.

ANCHORAGE: (Map/DeLong Pier site.) Capacity – 10 deep draft ships. Location – N.E. of Ko Khram Yai Island between 12° 43′ N. and 12° 44′ N. Minimum depth 7.5 fathoms. Good holding ground. (Deep water port site.) Capacity unlimited. Location – South and S.W. of Channel entrance between 12° 34′ N. and 12° 35′ N. Miniumum depth 9 fathoms. Good holding ground. No protection from weather.

RESTRICTIONS: *Bangkok:* No restrictions, able enter day and night, dependent tide at Bar Channel. *Kohsichang:* No restrictions, able enter day and night.

MAX. SIZE: Bangkok: not exceeding 565 ft. LOA Kohsichang. See "Berthing".

HEALTH: *Radio Pratique:* According to the Thai Ministry of Health's Regulations and International Health's Regulations article 36:

Under the responsibility of ship's captain and shipping Agents, vessels from infected areas may apply for exemption of Quarantine through radio pratique by telegram sent to Quarantine Bangkok, stating name of ship, last port, number of passengers and health of crew and passengers.

(a) Vessels with passengers from infected areas proceeding to the berthing places in Bangkok must slow down at Paknam enabling Port Health Officer to board the ship for inspection.

(b) Vessels without passengers from infected areas go directly to berthing places in Bangkok where they will receive Port Health Officer for inspection.

Remarks: In case of suspected infectious disease on board any ship or anything wrong about health or ship sanitation, the ship's captain is requested, as early as possible, to inform the Port Health Officer at International Quarantine Office (Medical) Section, Immigration Division, North Sathorn Road, Bangkok, Tel. 39588.

Documents Required: 1 copy of Maritime Declaration of Health; 1 copy of Crew List; 1 copy of Passenger List; Derating or Derating Exemption Certificate.

Vaccination: Vaccination Certificates required: Smallpox; Cholera (only when leaving from infected areas); Yellow fever (only when leaving from infected areas).

However, vaccination may be done as deemed necessary by Port Health Officer even if the crew or passengers are from non-infected areas.

Vaccination certificates will be shown collectively for transit passengers/crew members and individually for disembarking passengers/crew members only.

Exemption from Vaccination: If the Port Health Officer is of the opinion that vaccination is contra-indicated on medical grounds, he shall provide the persons with reasons, written in English, underlying that opinion, which health authorities should take into account.

Death on Board: In the case of death on board after the ship was at the anchorage or at the port, permission to land the corpse must be obtained after the inspection of the Port Health Officer, if the cause of death was not quarantinable diseases.

Ship's Captain or shipping Agent must inform the Port Health Officer for inspection if there are cadavers and/or remains on board, who died in a foreign port, in order to pass through the quarantine. The dead should be accompanied by a death certificate (or a true copy), signed by the medical officer and placed in a coffin hermetically sealed in a casket, which is air-tight and waterproof.

According to Immigration Law B.E. 2493 (1950): The traveller to Thailand must be free from diseases forbidden under section 14 (4) of the Immigration law such as: trachoma, leprosy, tuberculosis, venereal diseases, including physical or mental defects who cannot earn their living.

RADIO:

Name of Station	*Frequencies*	*Remarks*
Bangkok Radio:		
HSA Long Wave	500 kHz (for calling) 480, 512 (for traffic)	operate 24 hours
HSA Short Wave	8686 kHz (for calling) 8686, 12800 kHz (for traffic)	operate 7 times a day every day beginning hours of 0000, 0200, 0500, 0800, 1100, 1400 and 1600 (GMT).

In addition to above, communication can be made through the Port Radio and Pilot Radio; however these 2 stations can be reached within steaming time of less than 24 hours prior to arrival at Bangkok, their particulars as follows:

HSC 61 L.W. 500 kHz (for calling)
operate 2300–1700 hrs. GMT
512, 480, 468, 454 and 425 kHz.
(for working)
Traffic Lists broadcast at 0450 hrs. GMT, and the beginning of every hour every day.
HSC 62 S.W. 8466 kHz.
Operate 5 times a day every day beginning hours of 0000, 0300, 0600, 0900 and 1300 hrs. GMT.

Information to be supplied by incoming Vessel:

(1) Last port of departure.
(2) Estimated time of arrival pilot station.
(3) Draft (fresh water).
(4) General cargo tonnage for discharge.
(5) Dangerous cargo.
(6) Heavy lift required.
(7) Fresh water required.
(8) Number of passengers (landing and transit).
(9) Time of dropping anchor at pilot vessels.

VHF: VHF communication with port radio and pilot radio through Channel 16 (24 hours service). Also VHF communication with shore for International Maritime Mobile Service under following:

Channel 24
For ship transmitting frequencies 157.20) } (for calling)
For shore ,, ,, 161.80) }
Channel 26
For ship transmitting frequencies 157.30) } (for traffic) service
For shore ,, ,, 161.90) } 24 hours
Channel 28
For ship transmitting frequencies 157.40) } (for traffic)
For shore ,, ,, 162.00) }

TUGS: Will join when vessel approaches berth, using tug's line without extra charge. 6 tugs available, 25 tons static pull.

BERTHING: No difficulties in approaching berth. Agents will cable to Master to inform when Pilot has been ordered to board vessel.

Midstream: 21 anchorage places and mooring buoys for sea-going vessels.

2 berths in front of Co-operative Salt wharf for 500 ft. vessels
4 berths in front of Customs boarding station for 300 ft. vessels.
2 berths at Bangplakod for 565 ft. vessels.
1 berth at Bangplakod for 500 ft. vessels.
5 berths South Sathupradit (6 mooring buoys) for 450 ft. vessels.
3 berths North Sathupradit for 400 ft. vessels.
4 berths North of Krungthep bridge for 280 ft. vessels.

Berths: 87 wharves on both sides of the river for sea-going vessels:

16 berths for imported general cargo (km. 27 to km. 29) on the left bank of the river at Klongtoi operated by the Port Authority of Thailand for 565 ft. vessels.

1 berth for imported general cargo (km. 39.5) on the right bank of the river operated by Thai Maritime Company for 400 ft. and 280 ft. vessels.

2 berths for imported general cargo (km. 46) on the right bank of the river operated by Thai Maritime Company for 250 ft. vessels.

14 berths for imported petroleum products operated by private and government organization for 150 ft., 350 and 565 ft. vessels.

54 berths for export cargo operated by private companies for 280 ft. to 565 ft. vessels.

36 dolphins in front of Klongtoi wharf. A row of 36 dolphins along the river at a distance of 275 m. from the Klongtoi wharf, to accommodate 7 ocean-going freighters for exported cargo.

Kohsichang: 7 berths available, no limit on length, max. draft 35–47 ft.

CRANES: 2 floating cranes at 125 tons capacity may be used for handling cargo in the ship's holds. Both are owned and operated by private companies.

BRIDGES: Bangkok port has one bridge only. However, as bridge up river, vessel permitted to pass bridge with LOA not exceeding 280 ft.
STEVEDORES: Vessel to advise Agents 48 hours prior arrival, text required in this cable to be ETA, Drafts, Tonnage of cargo aboard for Bangkok, Number of crew/passengers, Dangerous cargo/Heavy lifts, Gangs required.
MEDICAL: Hospital facilities available, advance notice of ETA required.
TANKERS: Diameter of shore line various from 6 in. to 20 in. All terminals are able to provide reducers.
DENSITY: Bangkok: Min. 1000, max. 1011; Kohsichang: 1021.
FRESH WATER: Available, supply can be made through barges and shoreline. Capacity of barges from 120 to 250 tons, rate of supply approx. 30 t.p.h. Advance notice 24 hours.
FUEL: Available. Supply can be made by barge and alongside terminals, no delay on bunkering, advance notice 48 hours.
DEVELOPMENTS: *East Quay wall expansion at Klongtoi Wharf:* This project provides 6 more berths for ocean-going vessels, consisting of 2 berths for conventional freighters, 4 berths for special container ships and a 450 m. long wharf for lighter aboard ship (LASH). The construction work is now completed.

Laem Chabang deep sea port: The location of this deep sea port is expected to be at Laem Chabang on the Eastern side of the Gulf of Thailand near the town of Sriracha and about 120 km. S.E. of Bangkok. A Dutch engineering firm has been appointed to make the initial survey and final design under the financial assistance of the Dutch Government. This project is now under consideration and construction work is expected to commence in 1979.
GANGWAY/DECK WATCHMEN: Necessary.
OPENING/CLOSING HATCHES: In general carried out by stevedores without extra charge. (Ordinary hatch covers, not new hatch cover system.)
CUSTOMS ALLOWANCE: 200 cigarettes for officers, while crew member only 100 for 3 days. Wine/Spirit; 1 bottle each, opened.
CARGO GEAR: Supplied by stevedores except cargo tent and forklift truck.

IDENTIFICATION CARDS: Required for all crew and officers.
CONSULS:

Argentina	36911–3
Australia	35970–9
Austria	58327, 59071, 517208
Belgium	30840
Brazil	59070, 5–6030
Burma	30237, 31698
Canada	3–2956–7, 3–0746, 3–8215
China	5–8051–4, 51–3912
Denmark	26–3930
Finland	33617
France	3–0957–9, 3–0950, 3–4644
Germany	86–1041
Great Britain	53291, 517952
Greece	52–1686
India	3–5065
Indonesia	5–8045–7, 51–8915
Iran	86–0950, 86–1350
Iraq	229353
Ireland	39454
Israel	5–3371–2, 51–8915
Italy	3–4508, 3–7230, 3–7819
Japan	5–3301–9
Korea	86–1074–5
Cambodia	57650, 57709, 55223
Laos	86–1041
Malaysia	86–1390–1
Monaco	31437
Nepal	917240
Netherlands	5–3360, 5–3368–9
New Zealand	3–5936–7
Norway	3–0271
Pakistan	5–7006–8
Panama	911289
Philippines	910008, 910211
Portugal	30372
Saudi Arabia	37941–2
Sri Lanka	8291168
Singapore	30509, 33117, 38735, 38741
USSR	31824
Spain	56502, 58368, 55167
Switzerland	58002–4
Sweden	863907–8
Turkey	73999
Egypt	53358
United States of America	59800, 59801–9, 53101, 55981, 517986, 516939, 519914, 58478, 522723
Vietnam	517201–3
Vatican	31804

REPAIRS: Only minor repairs.
DRY DOCKS: 1 for vessels up to 360 ft. LOA.
REPATRIATION: Possible; however, no facilities for crew changes.
AIRPORT: About 25 kms. from Bangkok, regular services by airlines.
TIME: GMT plus 7 hrs. No change of clock during the year.
HOLIDAYS: Able work all around the year except December 31st and January 1st.
POLICE/AMBULANCE/FIRE: Police (Highway) 816240, 816241, 816250. (C.I.D.) 219111, 225151; Ambulance 811544; Fire 816666, 811544.
TELEPHONE: Available when alongside PAT berths.
SERVICES: No tank cleaning equipment. No facilities for discharge of tank washings. Compass adjusting, but spare parts unavailable. Radar/VHF/radio repairs. Lloyd's/ABS/Veritas/Nippon Kaiji Kentei Kyokai, Surveyors available.
SHORE LEAVE: Permitted.
DELAYS: Occasionally congestion, delay 1 to 2 days.
AUTHORITY: Chairman: Port Authority of Thailand.

PHUKET: 07.50 N. 98.25 E.

DOCUMENTS:
PRIOR TO ARRIVAL AT PHUKET:
Entry documents and advance information.
Custom and Immigration Entry forms as well as list of other documents required on *vessel's own forms* to be completed in advance for presentation on arrival Phuket will be sent in advance to the Agent at one of the previous ports together with request for the following information required 4 days in advance of vessel's arrival.

Confirmation of ETA and any subsequent revised ETA.
Captain's name.
Last port of call before Phuket.
Next port of call after Phuket.
Net registered tonnage (n.r.t.).
Hatch distribution and gangs workable.
Cash advance of Master.

Flags: Vessels are required to fly the Thai flag and display the code flag "Q" on arrival.
PILOTAGE: There is no official Pilot available.
ANCHORAGE: The following anchorages are regularly used by ocean carriers of deep draft calling Phuket for loading or discharging cargo.

During the N.E. Monsoon Season: Prevailing wind from November through March and periods of strong Easterly winds, vessels are recommended to anchor in position 7° 53′ N. and 98° 27′ 15″ E. about 0.5 mile off Laom Mai Pai to pick up the boarding party and stevedores before proceeding to the actual anchorage for loading at position 7° 57′ N. and 98° 33′ E., about one mile off Koh Yac Hyai, draft approx. 16 m. (50 ft.) at LWOS. However, during calm weather periods cargo operation will be carried out at the first mentioned anchorage.

During the S.W. Monsoon season: Prevailing from April through October and any periods of strong Westerly winds, vessels are recommended to anchor at position 7° 53′ N. 98° 27′ 15″ E. about 0.5 nautical mile off Laom Mai Pai, draft approx. 14 m. or 45 ft. at LWOS.

To facilitate cargo operations during swell from South, vessels are requested to anchor as close as possible to the above anchorage positions according to the Master's judgement.

No Pilot is required on approaching the above anchorage; however, it should be noted *three ocean-going dredgers* are operating in the area between Koh Dok Mai and Kon Khai Nok which should be passed at a distance of about 1,500 ft. to keep clear of their anchor lines. The dredgers are lit up and clearly visible at night.

It should also be noted during the new moon period there are several small fishing craft in the area.
RESTRICTIONS: *Channel:* The channel around Koh Tapae Kyai is normally passed clockwise and is marked by a system of buoys, the position of which are shown on Thai charts. However, it is also possible to turn around by swinging on the anchor just after passing buoy No. 3 on a rising tide (South to North) just before high tide.

Width of Channel; Min. 230 ft. at buoy No. 6 measured (chart datum at LLW) at 6 m. depth curve. Max. 900 ft. at buoy No. 4 measured at 6 m. depth curve.

Restriction in Navigation: (1) Entering or leaving through the North channel involves a rather sharp turn with a radius of about 1,000 ft. and angle of about 115° between the axis of channel in a restricted area between buoy No. 6 and Koh Tapai Noi Island. Please also note the wreck buoy between buoy No. 6 and Koh Tapao Noi.

(2) The draft at buoy No. 6 is about 24 ft. 6 in. at Lowest H.W.

(3) At buoy No. 5 are placed two pairs of mooring buoys parallel in the channel, occasionally used by tankers discharging petroleum products to Esso and Shell installations ashore. The width between the narrowest pier is about 150 ft. and vessels are required to pass between these mooring buoys.
HEALTH: All crew and passengers must have valid health certificates for small-pox and cholera.
RADIO: Messages to and from vessels at sea on the West coast of the Malayan Peninsula are best transmitted via Penang Radio in time to allow retransmission to Phuket at about the following local times:

Weekdays at 0930 hrs., 1400 hrs. and 1630 hrs. Sundays at 1630 hrs.

For vessels outside this area, messages can be sent via Bangkok or Singapore as applicable. Cables via Bangkok Radio are normally transmitted every second hour from 0800 to 2100 hrs. local time, whereas cables via Singapore are sometimes retransmitted via Bangkok Radio and sometimes via Penang Radio.

There are no facilities for ship-to-shore communication in Phuket, but vessels are *not* required to close down their radio station or VHF set while in port.

There is long-distance telephone connection with Bangkok, Penang, Singapore and Kuala Lumpur from Phuket at all hours.

Despatch Cables: Agent will in all probability need to send cables via the ship's radio reloading results, etc., subject to the Captain's approval. The cost of all such cables is to be borne by the vessel.

TUGS: No tugs available.

BERTHING: *Pier Facilities:* At Laen Klusi, Thailand Smelting and Refining Co. Ltd. have built a crossway connected by a short bridge to a pier which is parallel to the channel. The pier and channel are presently only suitable to accommodate vessels up to about 10,000 d.w.t. and approx. 430 ft. long, not exceeding 22 ft. draft. Vessels berthing at the pier are recommended to anchor at position 7° 48′ 24″ N. and 98° 25′ 12″ E. to await loading and favourable tide.

Dimensions of the pier: Length 61 m. (200 ft.), width 12 m. (40 ft.). Depth about 24 ft. 6 in. at LLW.

Fenders: The pier is protected by a system of wooden fenders in addition to which there is one fender at each end of the pier with solid rubber buffers.

Mooring buoys: There are two mooring buoys about 700 ft. apart each at equal distance from the end of the pier.

MEDICAL: It is only possible to get a doctor on board in the most severe cases, but otherwise there are two hospitals in Phuket, one of which is managed by American Seventh Day Adventists Mission Doctors and the other is a General Hospital.

FRESH WATER: Limited and difficult to obtain.

FUEL: Limited and difficult to obtain.

CONSULS: None.

SURVEYORS: No marine surveyors in Phuket; however, a surveyor can be called from Bangkok.

REPAIRS: No facilities.

SATTAHIP: (Military port, Royal Thai Navy).
Chuk Samet Port 12° 30′ 40″ N. 100° 55′ 00″ E.
Tungprong Port 12° 41′ 58″ N. 100° 50′ 21″ E.

PORT LIMITS: Extend to approximately 1,500 yards from the quay wall at Chuk Samet Port, and 1,000 yards from piers at Tungprong Port.

DOCUMENTS: See "Bangkok".

PILOTAGE: Recommended working daily during the day time only. Advance notice required 4 hours prior to arrival on working day (on holiday notice required at 0830-1200 hrs.) Radio frequency used when handling the vessel is 27125 mHz.

ANCHORAGE: Anchorage area for waiting berth and Pilot:

Chuk Samet Port; Capacity: eight deep-draft ships min. depth 8 fathoms.

Lat. 12° 34′ N.	Lat. 12° 36′ N.
Long. 100° 50′ 35″ E.	Long. 100° 51′ 35″ E.

Tungprong Port; Capacity: four deep-draft ships minimum depth 10 fathoms.

Lat. 12° 43′ N.	Lat. 12° 45′ N.
Long. 100° 49′ E.	Long. 100° 49′ 30″ E.

RESTRICTIONS: Berthing day time only.

MAX. SIZE: See "Berthing".

RADIO: Radio telephone.

Name of Station	*Frequencies*	*Remarks*
MSC	2738 mHz	Day time
Portsat	2738 mHz	Day time

TUGS: Join when vessel approaches berth, charge for use of tug's lines.

BERTHING:

Limitation of Draft:

Chuk Samet Port: Depth 32 ft. below LWOS or 36 ft. below MLW.

(1) For cruising in the channel
32 ft.
– 3 ft. for squat, tidal phenomena, etc.
– 2 ft. for under keel clearance
Draft = 27 ft. at LWOS

(2) For staying in port
32 ft.
– 2 ft. for under keel clearance
Draft=30 ft. at LWOS

(3) Draft of the vessel could be increased for the day of staying by adding the figure of the height of tide at low water of that day to the figure of draft in (2) above (30 ft.+Height of tide at LW).

Tungprong Port: Depth 29.8 ft. below LWOS or 33 ft. below MLW Draft of the vessel to be brought and stayed alongside is 27.8 ft. at LWOS.

	No. of Berths	*Max. LOA (ft.)*	*Remarks*
Chuk Samet	4	600	General Cargo
	1	600	Tanker
Tungprong	3	600	Ammunitions

Cruise passenger ships are permitted to berth at Sattahip.

STEVEDORES: Vessel to advise Agent 7 days prior to arrival. Text required in this cable are: flag, ETA, draft, tonnage of cargo aboard for port, number of crew/passengers, dangerous cargo/heavy lifts, gangs required.

MEDICAL: Hospital facilities available.

TANKERS: Diameter of shore lines are 6, 12 and 20 in.

DENSITY: 1021.

FRESH WATER: Limited, 200 tons per trip, addition 100 tons for boiler. Supply can be made by water trucks, advance notice of ETA required.

FUEL: Available, supply can be made by barges, advance notice of ETA required.

GANGWAY/DECK WATCHMEN: Necessary.

OPENING/CLOSING HATCHES: Carried out by stevedores without extra charge.

CUSTOMS ALLOWANCE: 200 cigarettes for each officer, 100 for each crew member for 3 days. One bottle each, wines and spirits, opened.

CARGO GEAR: Supplied by stevedores.

IDENTIFICATION CARDS: Required for all crew and officers.

REPAIRS: Only for minor repairs.

TIME: GMT plus 7 hours. Throughout the year.

POLICE/AMBULANCE/FIRE: Security centre 2187; Duty officer 2102 (after duty hours); Police 3180; Ambulance 116; Fire 117.

TELEPHONES: Available (U.S. military circuits).

SHORE LEAVE: Permitted.

AUTHORITY: Port Director.

SRIRACHA: 13.07 N. 100.51 E.

DOCUMENTS:

For Customs

6 copies Crew List.
6 ,, Personal Belonging List.
6 ,, Provisions – Stores List.
6 ,, Foreign Currency List.
6 ,, Deck Stores List.
6 ,, Arms – Ammunition List.
6 ,, Opium List.
6 ,, Drug Store List.
6 ,, Bonded Store List.
6 ,, Passenger List (to be typed also if no passengers aboard).

For Immigration

3 copies No. 3, 4 Inward Form.
3 ,, No. 3, 4 Outward Form.
2 ,, No. 35 Immigration Form.
2 ,, Crew List.

The above forms No. 3–4–35 will be handed to Master by the Agent's representative on arrival.

For Quarantine

2 copies Vaccination List (Cholera–Smallpox).
1 copy Maritime Declaration of Health.

PILOTAGE: Not compulsory. The terminal will provide a Mooring Master to give assistance in berthing. Advance notice required 48 hours prior to arrival. No VHF communications between ship and terminal.

The Mooring Master boards off the berth in approx. position 13° 07′ N., 100° 50.5′ E.

It is reported that, when crossing the Bar with Ko Nok Islet abeam, distance 1.5 miles, vessel steering 048T, least recorded depth approximately 56 ft. LW.

The Mooring Master acts as supervisor and liaison between ship and shore and remains on board until clear of berth.

Accommodation ladder required.

APPROACHES: The recommended courses approaching seaberth through the Southern part of Ko-Sichang are as follows:

from Junction point named "A"	Lat. 12° 43′ 00″ N. Long. 100° 44′ 36″ E.	TC=360°
to Junction point named "B"	Lat. 12° 56′ 14″ N. Long. 100° 44′ 36″ E.	
from Junction point named "B"	Lat. 12° 56′ 14″ N. Long. 100° 44′ 36″ E.	TC=022°
to Junction point named "C"	Lat. 13° 00′ 00″ N. Long. 100° 46′ 12″ E.	
from Junction point named "C"	Lat. 13° 00′ 00″ N. Long. 100° 46′ 12″ E.	TC=037°
to Junction point named "D"	Lat. 13° 06′ 20″ N. Long. 100° 51′ 00″ E.	

from point "D" A/C to 000° (T) up to Anchorage Area or Point "E".

Point "E"	Lat. 13° 07′ 00″ N. Long. 100° 51′ 00″ E.

ANCHORAGE: Within 1 mile of position "E" in a depth of 12 fathoms. The bottom is mud.

RESTRICTIONS: Tankers berth in daytime only.

MAX. SIZE: Length 900 ft. max. draft 50 ft.

HEALTH: If vessel arriving from foreign port, cable required 48 hours prior to arrival at Quarantine Bangkok, stating number of crew and passengers, ETA, last port of call and date of sailing, any sickness or death arising during the voyage, otherwise confirming all well.

Vessels shall have derating certificates valid on arrival as well as all passengers' and crew members' valid vaccination certificates against cholera and smallpox.

RADIO:

Name of Station	*Frequencies*	*Remarks*
Bangkok Radio:		
HSA Long Wave	500 kc/c (for calling) 554, 512 480, 468 (for traffic)	operate 24 hours.
HSA Short Wave	8686 kc/s (for calling) 8450, 8420, 8400 8380, 8360, 8330, 8320 kc/s (for traffic)	operate 5 times a day every day beginning hours of 0900, 1200, 1500, 1800 and 2100 hrs.

Masters of all vessels proceeding to Sriracha are to notify their Agent by radio of their expected time of arrival at least 3 days prior to arrival. This notice shall be amended in the event of any change in the time of arrival.

In addition to the above, the ETA message shall be confirmed 24 hours before arrival. The first notice of arrival is to contain the following information:

Cargo grade and quantities to be discharged.
Discharging rates, barrels per hour.
Deepest salt water draft
Bunkers and water on arrival.
Urgent stores to be delivered on arrival, if any.
Bunkers and water to be delivered, if any.
Laundry service, if any.
Nature of any extraordinary repairs to be effected.
Any other matter to be attended to on arrival such as electronic equipment repairs, medical attention or hospitalisation, crew repatriation (in this case advise name, age, nationality, passport number).
Cash required, if any.
Crew liberty launch service, if any.

BERTHING: One buoy berth for tankers up to 50 ft. draft. Other berths where draft 43 ft. 6 ins. and 32 ft. 6 ins. Reducers available. No facilities for discharge of tank washing.

Each berth consists of 6 buoys – one at either bow and quarters, and inshore beam buoys abreast of focsle and poop breaks. The main berth is arranged to accommodate a tanker of 90,000 d.w.t. The required moorings are 2 ropes and a wire to each bow and quarter buoy, and 1 wire to each breast buoy. The offshore anchor is used (1.5 to 2 shackles) but only for purposes of dredging into the berth, and holding the vessel's bow whilst moorings are run out.

The discharge hoses connected to the vessels manifold are 2×12 in. being in turn connected to 2×16 in. hoses which leads into a common manifold on the sea bed. The submarine line to the shore is of 32 in. diameter and about 1 mile in length.

Maximum permissible discharge pressure at ships rail, approx. 110 PSI.

Upon completion of discharge and clearing berth, vessels proceed to an anchorage off the berths, in order to carry out the Immigration Clearance, which necessitates the signing of an Immigration Form by every Crew member in the presence of the Immigration Officer. After signing the form the vessel is free to sail.

MEDICAL: Hospital facilities available, advance notice of ETA preferred.

DENSITY: About 1021.

FRESH WATER: Can be supplied by barge. 24 hours notice required.

FUEL: Can be supplied by barge. 48 hours notice required.

DEVELOPMENTS: A project for a new deep-sea port at Sriracha has been approved and is under survey.

CUSTOMS ALLOWANCE: 200 cigarettes for each officer, 100 for each crew member for 3 days.

Each man allowed 1 opened bottle wine/spirits.

IDENTIFICATION CARDS: Required for all officers and crew.

CONSULS: At Bangkok:

Argentina	36911–3	Korea	31940
Australia	35970	Laos	32010
Austria	58327	Malaysia	36927
Belgium	30840	Netherlands	53368
Brazil	59070	New Zealand	31318

AIRPORT: Situated about 25 km. from Bangkok, regular international services.

TIME: GMT plus 7 hours. No changes during the year.

AUTHORITY: Director General.

NOTES

Please also advise Shipping Guides Ltd.

Togo Republic

KPEME: 06.12 N. 01.30 E. (See Plan Book)

PORT LIMITS: In accordance with the terms of Charter-party a vessel is considered to be an "arrived ship" when she is anchored between one mile and two miles from the end of the jetty.

DOCUMENTS:

2 Crew Lists.
2 Stores Lists.
2 Private Property Declaration Lists.
2 Lists of last two Ports of Call.
2 Passenger Lists (if no passengers, 2 lists stating same).
2 Cargo Manifests (if no cargo for Kpeme, 2 lists stating same).

PILOTAGE: The limits of the port of Kpeme are fixed at 1 mile from all points of the jetty . Pilot boards out of the above limits. The Company Pilot remains on board while ship is berthed and disembarks when vessel cleared port limits. International code pilot signal used. At night, vessel should anchor between 110° and 180° at least 1 mile from the end of jetty.

VHF: Radio station, call "Kpeme pilot station" on Channel 16. Pilot boat grey motor boat without special signals.

APPROACHES: By day the extremity of the jetty (three artificial islands and two loading machines) forms an obvious landmark.

At night a white light (situated at the extremity of the jetty, 23 m. above the sea) all around horizon – light 3 sec., occulting 1 sec., light 1 sec., occulting 1 sec.

ANCHORAGE: Good holding ground (sand and mud) between 14 and 16 m.

RESTRICTIONS: Vessels should signal twice the date and probable time of her arrival. The first time 72 hours and the second time 24 hours prior arrival. Vessels berth in daylight only from 0530 to 1530 hrs. GMT. Unmooring can be effected day and night. Water approaches are clear. Any ship should have both fore anchor cables in perfect order and capable of being used in their entirety. Any ship should be able to leave immediately if she receives order to do so from Harbour Master. With this in mind, engines must be on standby. Ships are not authorised to cross port entrance without a Pilot on board. After winches in perfect order.

MAX. SIZE: Tankers up to 31 ft. draft on arrival. Bulk carriers up to 38 ft. draft on sailing. Bulk carrier up to 32 ft. max. on berthing. LOA up to 215 m., max. airdraft 12.20 m.

HEALTH: Send message for free pratique within 24 hours of arrival to Port Health Officer, Kpeme.

RADIO: Until vessel within 600 miles, communicate through Portishead Radio, Senlis Radio and Dakar Radio. Within 500 to 300 miles via Abidjan Radio TUA 487 kHz. and within 300 miles via Lome Radio 5VA 472 kHz.

VHF: VHF radio station, call "Kpeme Port" on Channel 16.

TUGS: No tugs available. Two mooring launches of 150 h.p. each are at vessel's disposal.

BERTHING: Loading facility comprised of three artificial islands carrying conveyor belts (2) for loading phosphate only. They are breasted by a row of four dolphins. Vessel moors using port anchor and wires to four buoys which hold the ship parallel to the dolphins and about 20 m. off. Springs are run to the dolphins. Each loader delivers at a rate of 1,250 t.p.h. and two holds can be loaded at same time.

TANKERS: Moor at a special berth situated to the East at 0.4 miles away from the extremity of the phosphate pier. One submarine line 12 in. diameter, hose connection 8 in. diameter. At any time sufficient draft for securing and sailing, also fire hoses ready rigged on deck.

FRESH WATER: Not available. Vessel has to go to Lome.

FUEL: Not available.

MEDICAL: No facilities at Kpeme. In emergency, doctor obtained from Lome, about 25 miles away, or from Anecho, 7 miles away.

OPENING/CLOSING HATCHES: By ship's crew.

CONSULS: Nearest at Lome.

REPAIRS: No facilities available. Emergency repairs could be arranged in Lome.

CUSTOMS ALLOWANCE: 200 cigarettes or 2 oz. tobacco; one bottle of spirits. No Customs Authorities board the vessels or seal bonded stores.

REPATRIATION: No facilities exist for effecting crew changes. However, in emergencies repatriation can be arranged.

AIRPORT: Nearest Lome – four flights a week to Europe.

TIME: GMT.

TELEPHONES: Placed on board, charges included in stay-in-port tax.

SHORE LEAVE: Not allowed.

GENERAL: In the rainy season, high winds and swell may delay berthing operation.

AUTHORITY: Compagnie Togolaise des Mines du Benin.

LOME: 06.08 N. 01.17 E. (See Plan Book)

DOCUMENTS:

13 Crew Lists.
5 Kru-boy Lists.
5 Passenger Lists.
4 Lists Previous Port of Call.
1 Maritime Declaration of Health.
1 List of vaccinations.
3 Crew effects Lists.
1 List of arms and ammunition.

APPROACH: The approach to the port, by night, is assisted by 3 lights:

(1) *Baguida* (position 06° 09.5′ N. and 01° 19.5′ E.) occulting white and red. Lt. 2.5 secs., occ. 0.5 sec. period 3 sec. Vis. 17 miles. Sector: red 042°, covers the breakwater as well as the old Lome Wharf (position 06° 07′ N. and 01° 13.5′ E.).

(2) *Lome Togo-Port* situated on head of West breakwater (pos. 06° 08′ N. and 01° 17.5′ E.). Qk. Fl. (4) white and red every 10 sec. Vis. 5 miles. Red light sector covers only old wharf and is not visible seawards.

(3) *Lome Light* situated near town of Lome (position 06° 07′ N. and 01° 13′ E.). Group Fl. (2) white every 10 sec. Vis. 15 miles all around horizon.

By day, large, light-coloured transit sheds and a high, grey water tower (position 06° 08.5′ N. and 01° 16.5′ E.) are the first indications of port from seawards.

PILOTAGE: Pilots available 7 days a week from 0600 to 2100 hrs.for vessels to enter. Sailing possible at anytime but if sailing after midnight Agent has to advise pilot station before 22.00 hrs. Pilot station equipped VHF radio and works 24 hours per day on Channel 16. Pilot boat green motorboat with orange superstructure and international flag "H". Pilot boards 0.5 mile to 1 mile S.E. of breakwater.

ANCHORAGE: Vessels which arrive during darkness should anchor about 0.5 to 1 mile South to S.E. of breakwater, in white sector of Baguida light in 8 fathoms, where good holding ground (sand) obtained. Northern boundary of anchorage is red sector of Baguida light.

MAX. SIZE: Max. length 900 ft. (270 m.) and max. draft 31 ft. (9.5 m.). Tankers 39 ft. and bulk carriers 38 ft.

HEALTH: Health Inspector will board on arrival alongside and examine for cases of infectious diseases, after which will declare vessel free or not. Vessels entering must fly international quarantine signal "Q". Large hospital situated in Lome with doctors in attendance.

RADIO: Port operations carried out on VHF Channel 16,14 and 12, with range of approximately 30 miles. Aero beacon (position 06° 10.7′ N. and 01° 16.3′ E.) call sign "LME" on 379 kHz.

TUGS: 2 tugs, 960 and 3,200 h.p. available. For vessels of more than 500 g.r.t. tug is obligatory when berthing or unberthing.

STEVEDORES: Agent should be informed as soon as possible of ship's ETA, length, max. draft, tonnage to load and/or discharge and number of gangs required. Agents should advise pilot station of vessel's ETA.

TANKERS: Togo-Port has sea pipe-line belonging to the Societe Togolaise d'Entreposage. Tankers should moor at 3 large mooring buoys outside breakwater. Diameter of pipe-line 8 in. Discharging about 230 t.p.h. (depending on ship-pumps). Max. length which can be handled at buoys is 720 ft. (220 m.) max. draft 31 ft. (9.5 m.). There is also a Refinery which has a tanker berth on the East Breakwater max. LOA 250 m. and max. draft 39 ft.

DENSITY: Density 1025. Harbour open to sea.

FRESH WATER: Available at every berth except tanker Sealine. Delivery rate 45 t.p.h. Fresh water examined monthly for purity by Sanitary Authority.

FUEL: Diesel fuel available for small craft, such as fishing vessels, small motor-ships and tugs.

Gas oil available in any quantity.

FIRE PRECAUTIONS: No extraordinary precautions are required. Vessels with hazardous cargo should declare this on ETA telegram to Agent. During time in port these vessels should take necessary precautions themselves, and all fire hoses should be ready rigged on deck. By day international code signal "B" should be displayed and by night a red light should be shown at masthead or at an all-round visible place.

Smoking on berths and within sheds *strictly* prohibited. Infringements of fire regulations punishable by fine.

DEVELOPMENTS: A second quay and a slip for small vessels.

GANGWAY/DECK WATCHMEN: Gangway watchmen and hatch security watchmen available; they wear a distinctive uniform.

OPENING/CLOSING HATCHES: Either ship's crew or dockworkers.

CERTIFICATES: All normal ship certificates should be available for inspection.

CUSTOMS ALLOWANCE: Because Togo-Port is a Free Port, no individual declaration by Crew members necessary.

CARGO GEAR: No extraordinary regulations. no cranes available and ships' own gear used for discharging and loading.

IDENTIFICATION CARDS: Shore landing passes issued by port police and should be supplemented by personal ID-Cards.

CONSULS: Ambassadors or Consuls from nearly all major maritime nations at Lome.

REPAIRS: Minor repairs only.

DRY DOCKS: Not available at present, but a slip for small vessels is included in future development.

AIRPORT: Lome airport with daily flights to Europe.

SEAMEN'S CLUB: A modern Seamen's Club with swimming-pool, bar and library situated 0.5 mile from port.

TIME: GMT throughout year.

HOLIDAYS: New Year's Day (1st January); Independence Day (27th April); Labour Day (1st May); Christmas Day (25th December). All other holidays will be worked in port with supplementary labour charges.

POLICE/AMBULANCE/FIRE: Push-button fire alarms situated in every shed and on exterior South wall of shed "B". Telephone for contacting Police, Fire-Station or Hospital available day and night in Harbour Masters office.
TELEPHONES: 3 public telephones within the port limits. No telephones on board.
SERVICES: No tank cleaning or compass adjusting available.
DELAYS: Ships berth in rotation of arrival at anchorage. Priority given to passenger ships as well as to vessels having less than 50 tons of cargo for discharge.
GENERAL: Distance from port to Lome city-centre is 4 miles. Taxis available at entrance of port.
SHIPMASTER'S REPORT: July 1978.
Documents: A mooring boat is available to Agents for the collection of documents on the roads given prior notice.
Max. Size: Berth No. 1 depth 5.5 m. Berth Nos. 2, 2/3, 3, depth 10.5 m. Berth No. 4, depth 9.5 m. Berth No. 5, depth 11.5 m. Berth No. 6 (New oil pier), depth 14.7 m.

Allowance is made for swell hence the max. draft at No. 6 is 39 ft.
Health: Free pratique can be obtained from the roads if all documents are sent to Agents concerned with directions for distribution.
Radio: Lome Radio has been out of commision since May, 1978, and may continue thus until further notice unless spares are obtainable from France.
Tugs: There is an additional tug 3,000 hp, 42 ton bollard pull, fully equipped for fire and salvage. The smaller tug of 17 tons bollard pull, is also equipped for fire-fighting.
Tankers: Berth No. 6 on Western side of East Mole with a depth of 14.7 m. and max. draft allowed of 39 ft.
Fuel: Gas Oil available ex-road tankers at all berths but full range of fuels to be provided at new tanker berth (No. 6) by August, 1978.
Cargo Gear: While no fixed cranes are available, there is a range of mobile cranes 5×10 tonnes, 1×25 tonnes, 1×45 tonnes and a container tower crane of 70 tonnes. All capacities are reduced by reach and angle while freeboard may limit use still further. A grain hopper and vacuvator gear will be in use shortly (July, 1978).
Airport: Flights are frequent, mainly indirect, to and from Europe, with 1 weekly direct to New York.
Consuls: At present there is no British representation in Togo but a Consulate may be re-established. Accra is 3/4 hours drive from Lome.
Seamans Club: A large accommodation block offering various rooms and flatlets is part of the compound. Seamen have priority and at reduced rates. The Home is in the charge of a Dutch pastor and under German control and has a VHF set for communication with vessels on the roads. It is open to non-seafarers.
Hotels: A wide range of hotels are available including luxury type catering for the expanding tourist traffic which takes advantage of the unique climate for this part of the Gulf of Benin.
Delays: While there is no registration as such, certain vessels on regular trade, plus those with cargoes qualified as important, do get priority and all are subject to the daily (except Sunday) Port Captain's Meeting at which all elements are represented. The results are not available until 1300 hrs. after which most Agencies communicate by VHF to their vessels on the roads. Container ships have a priority.
Working Hours: Gangs work 0600 to 1400 hrs.; 1400 to 2200 hrs. and 2200 to 0600 hrs. daily except, there is no 2200 to 0600 hrs shift on Sunday nights. Each has a half hour break after 4 hours working.
Surveyors: The Port Captain and Senior Pilot, represents Germanisher Lloyd. There is no Lloyds representative.
General: Lome is the entry port for Niger and Upper Volta as well as Western Ghana so the road and rail traffic is considerable. The border with Ghana is on the Western side of Lome City. A re-entry visa is necessary when proceeding to Accra and takes 1 or 2 days to process. The Ghana Border Police can issue 1 day Visitors passes.
AUTHORITY: Port Autonome de Lome.

AGENT: Socopao Togo, B.P. 821, Lome. Tel. 5588/89; Telex 5205. Cables, "Freight Lome".

NOTES

Please also advise Shipping Guides Ltd.

Tonga (Friendly Islands)

NOTES

Please also advise Shipping Guides Ltd.

NUKU'ALOFA: 21.08 S. 175.12 W. (See Plan Book)

DOCUMENTS: *Immigration Dept.*

2 Crew Lists.
2 Passenger Lists.

Customs Dept.

2 Crew Lists.
2 Passenger Lists.
1 Bond List.
3 Cargo Manifests.

Agents

1 Crew List.
1 Passenger List.
3 Cargo Manifests.

PILOTAGE: Order through Agents at least 24 hours prior to arrival. Pilot boat may be contacted on R/T 1 hour before arrival at Pilot station. This position is indicated on B.A. Chart (approaches to Nuku'alofa). There are 2 approaches, namely the Ava Lahi Passage and the Piha Passage. Vessels using Piha Passage are limited to a length of 500 ft.

Vessels may anchor in the vicinity of No. 1 Buoy if required to await Pilot, but this is not normally necessary as the Pilot is available as requested. Pilot boat carries usual signals.

ANCHORAGES: Vessels may anchor wherever they wish within the port, subject to the approval of the Harbour Master.

MAX. SIZE: Length unlimited, beam unlimited, draft 40 ft.

HEALTH: Radio pratique may be requested from "Tongamed", Nuku'alofa. Any suspected disease or fever must be reported by radio.

TUGS: No tug is required for berthing, but a tug is available in case of breakdown.

BERTHING: Queen Salote Wharf, only wharf in use. Vuna Wharf damaged by an earthquake in 1977 and as yet has not been repaired.

Queen Salote Wharf is expected to be extended by 1983.

STEVEDORES: There is a Master Porter employed by the Queen Salote Wharf Administration, who will supply whatever gangs are required. The number of hatches to be worked and the tonnage of cargo must be passed by the Agent to the Harbour Master at least 24 hours before vessel arrives.

MEDICAL: It is advisable to inform Agent in advance should medical attention be required. Hospital facilities are available. Vaccination certificates are required for visitors who are staying. Ship's crew do not require them generally.

DENSITY: 1025 at all states of tide.

FRESH WATER: Available ex Queen Salote Wharf at 25 t.p.h. delivery.

FUEL: A small quantity of light diesel fuel could be supplied, sufficient to enable a vessel to make the port of Suva.

DEVELOPMENTS: Queen Salote Wharf to be extended to at least 600 ft. Land is to be reclaimed on the Eastern and Western sides of the Wharf.

GANGWAY/DECK WATCHMEN: Not necessary as entry to wharf is restricted.

OPENING/CLOSING HATCHES: This work is completely optional.

CERTIFICATES: Normal requirements. Harbour Master may require to inspect cargo gear record.

CUSTOMS ALLOWANCE: A reasonable quantity is allowed by Customs according to expected stay in port. There are heavy penalties for smuggling.

CARGO GEAR: Valid certificates issued by competent authorities are recognised.

IDENTIFICATION CARDS: Not necessary.

CONSULS: None.

REPAIRS: Repairs can be carried out in the Marine workshop.

REPATRIATION: No facilities.

AIRPORT: 14 miles from town. Flights to and from Suva on Tuesdays, Thursdays, Fridays and Saturdays. There are also flights to New Zealand, same days as Suva.

TIME: The local time is 13 hours fast on GMT.

HOLIDAYS: *No work of any description is permitted on the Sabbath. This is strictly enforced.* Official Holidays are: Christmas Day; Boxing Day; Good Friday; New Year's Day; Easter Monday; Anzac Day; Emancipation Day (June 4th); Constitution Day (4th November); H.M. Queen Elizabeth's Birthday; King's Birthday (July 4th).

POLICE/AMBULANCE/FIRE: Telephone numbers not necessary. Just ask for the Department required.

OTHER PORTS: Pangai, Ha'apai Group; Neiafu, Vava'u Group; both these ports are suitable for any size of vessel at anchor. Service is by lighter. Vessels of 400 ft. in length with a max. draft of 22 ft. may berth at Neiafu.

AUTHORITY: Harbour Master, Nuku'alofa.

Trinidad

BRIGHTON (Texaco Oil Terminal): 10.15 N. 61.38 W.

DOCUMENTS/HEALTH/CONSULS, etc.: Refer to "Port of Spain".
PILOTAGE: Compulsory.
ANCHORAGE: Good holding ground in roadstead. Loading pier situated 10° 15′ N. 61° 38′ W., extending in a N.W. direction for 2,010 ft.
RESTRICTIONS/MAX. SIZE: Outer Berth East, 29 ft. 6 in. MLWST; Outer Berth West, 24 ft. 6 in. MLWST; Centre Berth East, 21 ft. 6 in. MLWST; Centre Berth West, 21 ft. 6 in. MLWST; Inner Berth West, 21 ft. 6in. MLWST.
TUGS: Not used. Launch assists with lines.
STEVEDORES: Supplied by Agent if necessary for loading Asphalt in drums only.
FRESH WATER: Available only at berth. Pumping rate 15 to 20 t.p.h.
FUEL: All grades of fuel alongside or by barge. Fresh water.
GANGWAY/DECK WATCHMEN: Customs guard on 24 hours duty at ship's side.
CUSTOMS ALLOWANCE: 200 cigarettes and moderate amount of spirits.
IDENTIFICATION CARDS: Not required.
REPAIRS AND DRY DOCKS: At Chaguaramas.
MEDICAL: All facilities available.
REPATRIATIONS: Can be arranged.
AIRPORT: See "Port of Spain".
TIME: GMT minus 4 hours.
TELEPHONES: No facilities for telephones on board.
SHORE LEAVE: No restrictions.
DELAYS: Not usual.
AGENT: See "Port of Spain".

CHAGUARAMAS: 10.40 N. 61.39 W.

DOCUMENTS/HEALTH/CONSULS, etc.: Refer to "Port of Spain".
PILOTAGE: Compulsory. Pilots board in Chaguaramas Bay – 10° 46′ N. – 61° 43′ W.
ANCHORAGE: Safe anchorage in Chaguaramas Bay between mainland and Gaspar Grande Island about 0.5 miles off the dock.
RESTRICTIONS/MAX. SIZE: No restrictions night operation. 2 docks – main wharf with overhead cranes for loading and discharging bauxite – 960 ft. long, max. draft 32 ft. Smaller wharf – 400 ft., draft 25 ft.
TUGS: Not used. Launch assists in mooring.
STEVEDORES: Not necessary. All loading/discharging done by Chaguaramas Terminals employees.
FRESH WATER: Available from dock, 40 t.p.h. Also supplied by barge.
FUEL: Can be delivered from dock or supplied by barge.
GANGWAY/DECK WATCHMEN: Customs guards on duty at ships side.
CUSTOMS ALLOWANCE: 200 cigarettes and a moderate amount of spirits.
IDENTIFICATION CARDS: Not required.
CARGO GEAR: Loading – carried out with travelling tower rate 1,000 t.p.h. Conveyor system. Discharging – carried out with travelling rig of 2×4 ton grabs. Conveyor system.
REPAIRS/FLOATING DOCK: Operated by Swan Hunter Docks. Displacing up to 11,380 tons, 560 ft. long vessels. Also good berthing alongside, draft to 35 ft., and a safe close anchorage, draft 50 ft. General extensive repairs undertaken.
MEDICAL: All facilities available.
REPATRIATION: Can be arranged.
AIRPORT: See Port of Spain.
TIME: GMT minus 4 hours.
TELEPHONES: No facilities for telephones on board.
SHORE LEAVE: No restrictions.
AUTHORITY: Chaguaramas Terminals Limited.
AGENT: See "Port of Spain".

CRONSTADT ISLAND: 10.39 N. 61.38 W.

Terminal owned and operated by Barytes and Minerals Ltd., handling bulk barytes.

Vessels from abroad calling at Cronstadt are required to proceed first to Chaguaramas for clearance formalities.

DOCUMENTS/HEALTH/CONSULS, etc.: refer to "Port of Spain".
PILOTAGE: Compulsory.
TUGS: One tug used for berthing if required.
RESTRICTIONS: Berthing/unberthing in daylight only.
MAX. SIZE: 400 ft. length. This size vessel would overhang wharf approx. 100 ft. fore and aft. Draft not limited as depth of water alongside is 60 ft.
BERTHING: Vessel moored with 2 springs, 3 head and stern lines to dock. Discharging carried out with shore crane grab bucket 3 tons capacity.
FRESH WATER: Available by barge.
FUEL: Available by barge.
AGENT: See "Port of Spain".

GALEOTA POINT: 10.05 N. 61.01 W. (See Plan Book)

LOCATION: Galeota Single Buoy Mooring Terminal is located 2.6 miles on a bearing of 208° from Galeota Point Lighthouse, and is an open unsheltered roadstead. Galeota Point is a narrow headland about 210 ft. high and located in Lat. 10° 08′ 00″ N., and Long. 60° 59′ 30″ W. The lighthouse, situated on top of the point, exhibits a light 240 ft. above sea level which flashes white every 5 seconds and is visible for 22 miles. The buoy itself exhibits a quick flashing, (1 flash per second), red light, 10 ft. high, and visible for 4 miles through 360°

DOCUMENTS:

Health Declaration (International Health Form to be filled out by Master on arrival.)
De-Rat Cert./De-Rat Exemption
Crew List (4).
Crew Customs Declaration (2).
Register.
Store List (2) (Signed by Master).
Passenger Manifest (2) (If any passengers are aboard).
Bonded Store List.
Clearance from last Port.
Manifest (if no cargo, a statement that vessel is in ballast).

ESSENTIAL REQUIREMENTS: MOST ESSENTIAL REQUIREMENTS TO BE MET BY TANKERS LIFTING OIL AT GALEOTA TERMINAL.

1. *Disposal of Ballast:* No dirty ballast will be pumped overboard. A separate ballast disposal line (16 in.) is available at the Terminal to pump ballast to a pit onshore where oil and water can be separated and disposal made.
2. *Notice of Arrival:* Incoming tankers must send ETA via commercial radio at least 72 hours before arrival at Galeota. Local time is GMT minus 4 hours and daylight saving (Summer Time) is not applicable.
3. *Arrival:* Company Loading Master and a Government Pilot if requested by the Tanker's Master will contact all incoming tankers about 3 to 4 miles from Galeota Point on a bearing of 220°/230° from the lighthouse, and will advise the ship's personnel in mooring and unmooring. If the buoy is occupied, or if arriving at night, vessels should anchor at least 1 mile South-west of the buoy.
4. *Tankers to have ready:* (a) 2 nylon or manila messenger lines of not less than 6 in. circumference and at least 300 ft. long, placed at the bow. (b) at ship's manifold there must be equipment capable of lifting the floating hoses. Weight of hose is about 3 tons.
5. *Crew Duties:* The tanker's crew will raise, rig, and operate vessel's derrick and winch for the hoisting of the floating hose. The Terminal crew will connect and disconnect loading hoses.
6. *Tanker's Valves:* Tankers valves must not be closed against incoming oil stream. At least 1 minute is required to shut down pumps and stop flow of oil from the Terminal storage.
7. *Communication-Emergency:* If ship-to-shore communications fail, a line launch is always alongside and has radio contact with the Terminal Control Centre.
8. *Responsibility:* The Tanker's Master is responsible at all times for the safety of all ship's operations. Galeota Terminal rules and regulations do not contravene International Safety rules such as SOLAS (Safety or Life at Sea) or other maritime regulations such as those of appropriate classification societies. In case of any conflict, the latter shall apply.

PILOTAGE: Vessels arriving should approach to within 3 to 4 miles of Galeota lighthouse on a bearing of 220°/230° and will be met by the Amoco Loading Master and a Trinidad and Tobago Pilot (if requested through vessel's Agent). The Pilot will be stationed on the bridge and will advise the vessel on the approach to the buoy. The Amoco representative will be positioned in a most advantageous position and will advise the ship's crew on picking up and making fast the floating nylon mooring lines.

Vessels are requested to make a proper lee and to have a pilot ladder safely and securely rigged, ready for immediate use, and long enough to reach the Loading Master's launch. At night, adequate lighting must be rigged overside for the Loading Master to approach the side of the ship and climb the ladder safely.

Raising, connecting, disconnecting and lowering of floating hoses will be performed by the Terminal's crew with the assistance of the ship's crew as advised by the Amoco Loading Master, who will remain on board while the ship is secured to the buoy. The Loading Master will be in direct charge of the portable VHF ship-to-shore radiotelephone communications.

If, in the opinion of the Loading Master, the vessel is not equipped with adequate mooring or hose lifting facilities, he will so inform the vessel's Master, and in such event the vessel shall not be brought into the moorings until facilities, lines, or gear are deemed satisfactory.

APPROACHES:

Port Limits: Approaching vessels should never anchor to the East or North-east of Galeota Point. A submarine pipeline from a platform in Lat. 10° 10′ 24″ N., and Long. 60° 39′ 56″ W., enters the Galeota Point area about half a mile Northward of the lighthouse. Vessels should approach from the South-westward and never anchor less than 1 mile from the SBM or between the buoy and the coastline.

Navigational Aids: Galeota Point lighthouse is located in Lat. 10° 08′ 00″ N., and Long. 60° 59′ 30″ W., and exhibits a white flashing light every 5 seconds and is visible for 22 miles. The lighthouse is unattended and frequently does not operate. The SBM exhibits a quick flashing red light every second, and is located in Lat. 10° 05′ 47″ N., and Long. 61° 00′ 45″ W.

Landmarks: Galeota Point appears as an island when approaching from seaward, since it is connected to the island of Trinidad by lower land. Situated on this lower land about 0.5 mile Northward of the lighthouse is the tank farm and processing area.

There are 5 oil storage tanks and they are painted a grey colour.

A small boat harbour is located 0.5 mile due West of the lighthouse in Guayaguayare Bay. The sheet piling type jetty extends seawards, on a bearing of 245°, 1,900 ft. from a point at Lat. 10° 08′ 14″ N., and Long. 61° 00′ 00″ W. The seaward 300 ft. of this jetty has a controlling draft of 13 ft. at extreme low water.

Vessels approaching from a North through East direction will observe lighted drilling platforms with following locations:

1. Teak "A"	Lat. 10° 10′ 24″ N.,	Long. 60° 39′ 56″ W.
2. Teak "B"	Lat. 10° 11′ 41″ N.,	Long. 60° 39′ 55″ W.
3. Teak "C"	Lat. 10° 10′ 29″ N.,	Long. 60° 40′ 36″ W.
4. Teak "D"	Lat. 10° 02′ 12″ N.,	Long. 60° 38′ 54″ W.
5. Teak "E"	Lat. 10° 10′ 26″ N.,	Long. 60° 39′ 55″ W.
6. Samaan "A"	Lat. 10° 20′ 30″ N.,	Long. 60° 40′ 47″ W.
7. Samaan "B"	Lat. 10° 19′ 46″ N.,	Long. 60° 41′ 04″ W.
8. Samaan "C"	Lat. 10° 19′ 47″ N.,	Long. 60° 41′ 35″ W.
9. Poui "A"	Lat. 10° 06′ 35″ N.,	Long. 60° 49′ 47″ W.
10. Poui "B"	Lat. 10° 06′ 55″ N.,	Long. 60° 49′ 02″ W.
11. Tesoro "A"	Lat. 10° 11′ 05″ N.,	Long. 60° 54′ 59″ W.

Vessels should exercise caution and keep well clear of these platforms because of unlighted buoys, small boat operations, submarine pipelines, and anchored test barges nearby.

The lighthouse 4 miles to the Southwestward of Manzanilla Point situated on Brigannd Hill is an excellent landmark for vessels approaching from the Northward. The lighthouse is elevated 712 ft. and exhibits a group flashing (3) white light every 30 seconds and visible for 35 miles.

RESTRICTIONS: The Terminal operates 24 hours per day, 7 days a week. Ships are loaded and unmoored at any hour, weather and other circumstances permitting. Vessels are moored during daylight hours only, however an exception to this rule may be made at the discretion of the Terminal. The Terminal will never be closed due to holidays.

MAX. SIZE: 250,000 d.w.t. Depth of water 95 ft.

RADIO: *Long Range and Radio Communications:* Ships may send their cable(s) to the Amoco office through the commercial station, "North Post Radio/9YL", which is about 10 miles Northwest of Port of Spain. Upon receipt of such cable(s) North Post will immediately relay it to Amoco's office through their Telex system. Messages pertaining to oil liftings should be addressed to AMOCOTRI, Trinidad. If it is necessary to send messages through vessels' Agents or Owners via International Telex Service, then they may be sent to Amoco by using the Telex address "WG 287" (Amoco–Port of Spain).

Cable or Telex messages addressed to Galeota Terminal would undergo the same procedures, but upon receipt in Amoco's radio office in Port of Spain, they will immediately be relayed to Galeota Point by HF/SSB radio teletype channel.

Cables from Galeota Terminal to the ships would be given to Amoco, Port of Spain radio office on the SSB, which will be telephoned to North Post Radio Station.

The coast radio station transmits traffic lists at regular intervals listing the call signs of all ships for which they have traffic on hand. At the end of their traffic lists, the coast radio station starts searching for answers on the frequency bands listed below. Thus, any vessel hearing its call sign in the traffic list, will immediately start calling the coast station on its own working frequency in the same band on which the traffic list has been heard. The searching coast station radio operator would eventually pick up the signals from the calling ship and would pass her his traffic.

Listed below is information on "North Post Radio Station" – 9YL:

Station	*Call Sign*		*Frequency*	*Hours*
North	9YL	(H.F.)	17,184 kHz	1200 hrs – 1530 hrs. (GMT)
Post		(H.F.)	12,885 kHz	1330 hrs. – 2050 hrs. (GMT)
Radio		(H.F.)	8,710 kHz	0100/0600/0900/1300 1500/1730 & 2130 hrs. (GMT)
		(H.F.)	6,470 kHz	2300 hrs.
		(M.F.)	476 kHz	0300 hrs. and every 4 hrs. thereafter.

Medium Short Distances: Ships may contact Galeota Terminal within 3 days before arrival on the marine HF frequencies. Galeota Point listens on 2182 kc/s and operates with Amoco's marine units on 2398 kc/s.

Ships equipped with FM/VHF radios may call Galeota Point on 156.8 mc/s=Channel 16 and/or Channel 8.

Advice of Arrival: It is important that ships establish radio contact with Amoco when 3 days distant from Terminal and maintain this contact until just prior to arrival at the Terminal. All ships should send a 72 hours ETA message to Amoco giving the best estimates of ship's arrival time at the Terminal. This ETA message should also include a definite statement of the details of any equipment required from shore for connecting submarine hoses to ship's manifold. Further ETA messages should be sent to Amoco when the vessel is 24 hours and 12 hours distant from Galeota Point and at any other time any appreciable change occurs in the original ETA or those subsequent thereto. The 12 hours ETA should include a positive statement regarding ship's readiness to load on arrival, and the number of hours that will be required to discharge ballast after the ship is berthed in mooring (see "Ballast").

Ship-to-Shore Communication: Ship-to-shore communication, while ships are in moorings, will be by portable VHF radiotelephone units. The Loading Master will advise Masters and Officers regarding the emergency whistle signals set up for use in event VHF radiotelephone units become inoperative. The use of the ship's radio station and/or battery charging equipment is prohibited during cargo transfer operations.

Ship's Radio Stations: The use of ship's radio equipment while ship is on anchorage in Terminal waters is prohibited by law, unless transmission is made through the local commercial station.

BERTHING:

Single Buoy Mooring: Tankers are loaded by means of a 42 in. pipeline from shore to the SBM which is 2.6 miles offshore. The ballast water is pumped ashore through a 16 in submarine line. The buoy piping consists of 2×20 in. diameter pipes for crude and 1×16 in. diameter pipe for deballasting with 2 by-pass valves. The loading hoses from the buoy to the tanker consist of 2×20 in. floating hoses, 755 ft. and 790 ft. long ending in 3×12 in. hoses of 90 ft. length. Valves are fitted in the buoy connectors so that the flow in one 20 in. diameter floating hose string can be diverted to the 16 in. diameter underbuoy hose string.

The SBM is designed for maximum tanker size of 250,000 d.w.t. and is located in 95 ft. water depth. The buoy is 11 m. in diameter, 4.80 m. high, and equipped with a navigation light and radar reflector. There is a skirt at the bottom of about 15 m. in diameter.

Ship's Gear: Vessels calling at the Galeota Point must be equipped with 2 nylon messenger lines of a minimum 6 in. circumference and at least 300 ft. long. These lines should be laid out free for running at the bow of the vessel. Warping winch or windlass should be in good working order and adequate to handle 12 in. nylon floating rope under heavy strain. Efficient stoppers must be available to transfer floating nylon from winch to bitts.

Vessels must be equipped to fit flanges on floating hoses which are ASA standards.

Ships must be adequately equipped with blocks, tackle and booms to hoist the floating hoses, each weighing about 3 tons, from the sea surface over the ship's port rail to the manifold, in a safe, efficient and expeditious manner. Ships must also have an adequate supply of nuts, bolts, gaskets, and wrenches to connect cargo/deballast hoses.

Ship's Alertness: The Terminal is an open roadstead, therefore, during the time a ship is moored at the Terminal, the ship's engines and gear must be ready with full power for immediate use.

Vessel at the SBM must be able to clear and shall clear immediately upon advice of the Loading Master or as directed by Amoco's Terminal Superintendent.

Ship's personnel should be at their stations and alert at all times during mooring, unmooring and cargo transfer operations.

Mooring Launches: Amoco maintains launches to assist in mooring and unmooring vessels.

BALLAST: It is the ship's Master's responsibility to see that no oil (crude, diesel, bunker C, or bilge) is pumped or spilled overboard from the ship. Galeota Terminal has 2 ballast water pits which are equipped with oil skimming equipment to accommodate any ballast water. The tanker may discharge ballast as desired into the proper line as soon as all arrangements have been made for this action.

All precautions shall be taken to prevent any loss of oil overboard; drip pans must be in place and used when disconnecting oil hoses from manifolds. The waters in and adjacent to the Galeota Terminal, and Amoco's offshore platforms must *never be polluted.*

As soon as practical after arrival, all vessel's tanks will be inspected. If during first inspection or during loading, it is revealed that ship's tanks are not oil-tight, tanker will be rejected and refused further loading. Ship will not be accepted later for loading unless satisfactory evidence, duly certified by Lloyds, ABS Surveyors, or other authorised survey agency, of effective repair is submitted.

A vessel must have sufficient ballast for safe manoeuvring and usually one-third of its tonnage is adequate. However, by a careful watch of the weather information and berthing instructions and by a knowledge of the behaviour of his own vessel, a master may desire to come to the Terminal with minimum ballast.

Ship's Master should be aware that at any time deballasting at sea occurs and has been reported or viewed by Amoco Trinidad Oil Company personnel, the offence will be documented, where possible, by Amoco personnel, and a report submitted to the proper Ministry of Trinidad and Tobago.

In addition to the lights usually displayed, vessels discharging ballast or loading cargo during darkness, will illuminate the area around the ship, to the satisfaction of the Loading Master, in order that any oil on the surface of the sea may be readily detected, and appropriate action taken. Vessels unable to illuminate the sea satisfactorily may not discharge ballast during darkness. Vessels should provide explosion proof flood lights for working on deck during night operations.

Loading and Deballasting Simultaneously: Vessels equipped with a separate system of ballast tanks will be allowed to discharge ballast and load oil simultaneously, providing approval is received from the Terminal Superintendent.

LOADING:

Rate of Loading: Maximum crude oil loading rate through 2×12 in. deck hoses is approximately 40,000 b.p.h. The flow is by pump and the line pressure will not exceed 100 p.s.i.

In order to save ship's time, it is requested that ballast water be pumped *as fast as possible* and that the tanker receives oil as fast as it can be delivered, both operations having due regard for safety. It is requested that any impediment (such as "Y's", strainers, or mud boxes) to the flow of oil be removed before arrival at the

Terminal. Connections should be provided so that 12 in. ASA deck hoses may be used.

Berthing: Tenders to load crude oil cargo will normally be accepted and the berth will be assigned to vessels in order of arrival, provided vessels have nominations for cargo valid at the time and are in all respects equipped and ready to moor. In the event that the berthing is delayed on account of weather, vessels will keep their position in line. Vessels required to leave the port area on account of weather (port closed) should keep in contact with the Terminal via radio in order that they will be available when the weather moderates. Amoco reserves the right to load vessels "out of turn" following the return of good weather, to the extent that such loading "out of turn" does not materially delay the loading of other vessels in line. For example, in the event that weather makes it necessary for vessels awaiting berth to vacate the terminal and put to sea, Amoco may load another vessel which arrives first after the return of good weather, but before the return of the vessels waiting in line ahead of it. And further, Amoco reserves the right to decline to moor a specific vessel if its condition or facilities are unsafe for mooring or loading, even though the port may be open to other vessels.

Connecting Hoses: After the tanker is securely moored, the floating loading/deballasting hoses must be lifted to the rail with ship's equipment. The two 12 in. hose lifts weigh about 3 tons each. The flange connection on each hose is for a 12 in. manifold. Hoses are lifted individually by the ship's gear and are connected on the port side. The 12 in. hoses are connected direct to the manifold and tankers should have their manifold fittings available.

The Loading Master and the hose crew will sling and connect the hoses to the vessel's manifold. The ship's personnel are expected to operate the winch and assist where necessary. A deck officer should be present at all times.

Loading Readiness and Arrival Time: The Company will make every effort to load vessels upon arrival or as promptly as berth is available, weather permitting.

Notice of readiness will not be accepted as at time of arrival, unless the vessel is in all respects ready to load. Arrival time will be considered as the time the Loading Master boards the vessel or the time that vessel anchors, whichever occurs first.

Responsibility: The vessel is responsible for the deballasting and loading. The Company Loading Master will advise the vessel in respect to loading pressures and hazards, but will not direct the loading except as may be necessary to protect the terminal facilities. Manipulation of ship's valves is the direct responsibility of the ship's personnel.

Deballasting Control: As soon as the vessel is ready to deballast and the line connections have been made, the manifold valves should be opened and the shore notified. Upon advice from the Terminal, ship may begin discharging ballast into shore line. Line pressures should not exceed 120 p.s.i. This corresponds to a flow rate of 800/1,000 t.p.h.

Oil Valve Control: Caution: The incoming oil stream is controlled onshore, and it is extremely dangerous to close a ship's valve against the incoming stream. Such a procedure creates excessive pressure, which may damage hose, ship's piping, or Terminal facilities. Vessels will be held responsible for damage resulting from failure to observe this precaution.

A reduction in loading rate before topping the final tank or tanks may be arranged through the Loading Master by the ship's officer in charge and a normal standby warning should be given about 15 minutes before the shut down of loading operations per normal tanker practice. On advice from the ship a minimum of 1 minute is required to stop the flow of crude oil.

Emergency Signal: A battery-operated emergency shut down signal is expected to be installed in the near future.

Code Flag: During loading or deballasting the International Code Flag "B" shall be displayed from a topmost signal halyard during daylight hours. During hours of darkness, a red light shall be displayed. This light should be of a character such as to be visible at a distance of at least 1 mile, and show an unbroken light all round the horizon.

Shore Stops: Requests for the Terminal to stop the flow of cargo at a pre-determined tonnage will be made verbally to the Loading Master, and Amoco will not be responsible for any error, and in the case of overloading excess cargo will not be pumped back ashore.

Some delays are always incurred when such a shore stop request is made.

MEDICAL: Vessels requiring emergency medical assistance should immediately contact the Terminal, by marine VHF radio, and supply the necessary pertinent information which will be passed on to the vessel's Agent.

Neither medical nor hospital facilities are available at Galeota or provided by Amoco. Limited facilities are available in Mayaro, which is about 30 minutes drive and unlimited service is available in Port of Spain which is two hours drive.

FRESH WATER: Only available by barge from Port of Spain.

FUEL: Only available by barge from Port of Spain.

REPAIRS: Masters of vessels loading or discharging at Galeota Terminal are advised that this port is considered an "Open Roadstead", and under no circumstances may engines be shut down for repairs while their ships are moored to the SBM system. There are no facilities at Galeota Terminal for making vessel repairs, but arrangements may be made through vessel's Agent, to utilise the Port of Spain facilities. It is emphasised that all vessels at the SBM must be in readiness to clear immediately on instructions to do so.

SURVEYORS: Amoco maintains an inspection laboratory at Galeota Terminal and will inspect cargo on specific request of off-tanker companies.

Classification agencies are represented in Port of Spain as follows:

American Bureau of Shipping
Grell and Company Ltd.,
60 St. Vincent Street,
Port of Spain

Lloyds Register of Shipping
Geo. F. Huggins and Co. Ltd.,
72–74 South Quay
Port of Spain

TIME: GMT minus 4 hours, and daylight saving (Summer time) is not applicable.

CONSULS: There are no consulates at Galeota; however, consular or diplomatic representatives for most nations maintain offices in Port of Spain.

CUSTOMS ALLOWANCES: Each Crew member is allowed to retain in his possession 200 cigarettes and 1 bottle of spirits. The balance must be listed and will be sealed in a locker by the Customs.

SHORE LEAVE: Shore leave for personnel of vessels loading or unloading at the Terminal is arranged through the vessel's Agent. All personnel going ashore must land at the Amoco small boat harbour. Sufficient crew must be aboard at all times for letting go lines in order to clear the mooring immediately if necessary.

SAFETY: The vessel's personnel are responsible for the safety of the vessel and must take all necessary precautions, whether or not so advised by the Loading Master, having in mind, the hazards of the operation because of the product being handled, weather conditions and any other circumstances requiring special care or caution.

It will be well to remember that Amoco *does not have* any tug or floating vessel in the area equipped with fire-fighting apparatus.

While the vessel is moored or within the vicinity of the moorings, all vessel's personnel and vessel's operations must comply or be in accord with the following safety rules:

1. The ship's engines must remain ready with full power for immediate use.
2. The Loading Master may request the Master to extend the ship's "No Smoking" areas as conditions warrant. Masters are also requested to instruct their crew not to throw lighted cigar or cigarette butts over the side or out of the portholes. All alleyway doors to passage ways leading to deck areas are to be kept closed during cargo transfer operations.
3. Not less than 1 deck officer and 3 seamen shall be available on deck at all times while vessel is in the mooring system.
4. Power must be available at all times on all deck winches and on the anchor windlass while vessel is in the mooring system.
5. Explosion proof deck lighting must be available for night mooring and loading. A good floodlight will be required to illuminate the area around the cargo hose connections during cargo transfer operations. During the discharge of ballast at night, the sea area around the vessel is to be adequately lighted.
6. All deck scuppers must be plugged tight before connecting the floating and deck hose and remain plugged until all hoses are disconnected.
7. The presence of unauthorised craft alongside is extremely hazardous. Ship's Masters are requested to require all non-Amoco craft to clear ship's side as soon as personnel have been embarked or disembarked.
8. No stores may be handled on the weather deck while ship is loading cargo, discharging dirty ballast, or while any ullage hatches, loading hose, or tank tops are open.
9. No cargo will be loaded while tank tops or ullage hatches are open.
10. During the time a vessel is moored in the Galeota Terminal, a continuous and efficient fire watch must be kept on deck and in the engine room. Fire hose (at least 2 pairs) shall be left out for immediate use at all times while in the berth.
11. In the event of fire breaking out in any part of the vessel, however minor it may be, the fire alarm must be given immediately. This will consist of a succession of long blasts on the ship's whistle, together with a rapid and continuous ringing on the ship's bell.
12. A safety check-off list and Terminal rules for safety will be delivered by the Loading Master.

WEATHER:

Climate: The climate around Trinidad is generally very good, and is strongly influenced by the North-east trade winds. Visibility is usually excellent except during passing thunderstorms and the percentage of days with less than one mile visibility is very small.

Weather Data and Summary:

Average rainfall	60.0 in.
Mean maximum temperature	87°F
Mean minimum temperature	69°F
Extreme maximum temperature	101°F
Extreme minimum temperature	52°F
Average relative humidity (0700 hrs.)	92%
Average relative humidity (1500 hrs.)	67%

Winds: Winds are predominantly from the North-east and East (about 90% of the time). The mean velocity is about 8/12 knots and infrequently 30 knot winds may be experienced.

Tides: A tidal range on the East coast of Trinidad is 4–5 ft., and the tides occur 17 minutes later than Port of Spain.

Sea Conditions: As Trinidad is constantly under the influence of the North-east trade winds, the seas and swells are predominantly from the Eastern quadrant throughout the year. Wave heights average about 6–8 ft. and during a 2-year observation period waves of 11 ft. and higher occurred for as many as 20 days per year.

Currents flow to the North-west 53%, North 24%, and N.N.W. 14% The currents are not seasonable as currents of 2 to 3 knots are experienced during all months of the year. Average current velocity is about 1.5 knots.

Sea Temperatures: The surface temperature over coastal areas average about 75° to 80°F in the Winter months and 80° to 85°F in Summer.

General: Trinidad is an area where buildings have been damaged by earthquakes and the South-west tip has experienced mud volcanoes and disappearing islands. The rainy season occurs in late Summer and Fall at which time as much as 15 in. per month may be experienced. Hurricanes are seldom felt in Trinidad and Tobago since these islands are to the South of the storm track.

GENERAL:

Government Officials: Trinidad and Tobago Customs officials will be stationed at Galeota and in most instances the Customs officer will also handle the duties of the Quarantine and Immigration officers. Should Customs guards be stationed on board vessels while in the moorings, it is expected that ships will provide food for these guards and other officials.

Quarantine Regulations: The rules governing quarantine of vessels are the same found in other ports of the world.

Visitors: Visitors must obtain a special pass from the Amoco Terminal Superintendent and it is strongly recommended they be restricted to a minimum due to the hazards involved.

Supplies: Commissary supplies, as well as steward's stores are not available at Galeota Point, but a limited amount of fresh fruits and vegetables may be purchased at the market in Mayaro, which is 30 minutes drive from the shore terminal. Unlimited supplies may be purchased in Port of Spain and all arrangements must be made through the ship's Agent.

Bunkers, gas, oil, marine lubricants or potable water are not available at Galeota.

Flag: All vessels are required to fly the Trinidad and Tobago ensign on the foremast during daylight hours. TT flags may be obtained from ship's Agent.

Contraband: Amoco prohibits unauthorised craft from coming alongside ships while in the moorings.

To avoid the possibility of undesirable items getting aboard vessels, it is recommended that Masters discourage "bumboats" or similar craft, coming alongside while vessel is in the Terminal vicinity.

Small Boat Harbour: A sheet piling type jetty is used for the harbouring of mooring launches and supply vessels. The entrance is defined, by night, with a red flashing light mounted on the seaward end of the jetty.

Company's Terminal: The Company's Terminal and marine administrative offices, storage tanks and laboratory for testing stock are located onshore at Galeota Terminal.

Agency: Amoco does not perform any vessel agency functions. Owners of vessels calling at Galeota Terminal must arrange for their own Agent.

OPERATOR: Amoco Trinidad Oil Company.

AGENT: See "Port of Spain".

POINTE-A-PIERRE (Texaco Oil Terminal and Refinery): 10.19 N. 61.28 W.

DOCUMENTS/HEALTH, etc.: As for "Port of Spain".

Officials require accommodation ladder to be rigged, usually on port side, for boarding and clearance.

PILOTAGE: Compulsory. Pilot ordered by Agent after receipt of ETA. Pilot ladder conforming to International Safety Regulations to be supplied by vessel.

ANCHORAGE: Safe anchorage and good holding ground in the roadstead. On acount of Pierre Shoal, a 21 ft. patch about 1.75 cables S.W. of the head of the main viaduct, vessels of moderate draft should approach with the main viaduct bearing more than 075°. The main viaduct consists of pipe-lines supported by reinforced concrete piling, located at 10° 20' N. 61° 30' W. and extends in a W.S.W. direction for 6,190 ft.

RADIO: Texaco Trinidad Inc. maintains their own radio station on frequency 2638 Mc/s. and VHF Channels 16, 13, 12, 11, 8 and 6.

MAX. SIZE:

No. 1 berth North: 40 ft. MLWST; 720 ft. LOA.
No. 2 berth North: 40 ft. MLWST; 775 ft. LOA.
No. 2 berth South: 35 ft. MLWST; 330 ft. LOA.
No. 3 berth North: 35 ft. MLWST; 640 ft. LOA.
No. 3 berth South: 20.5 ft. MLWST; 350 ft. LOA.
No. 4 berth North: 21 ft. MLWST; 350 ft. LOA.
No. 5 sea berth: 40 ft. MLWST; 900 ft. LOA.
No. 7 berth: 35 ft. MLWST; 700 ft. LOA.
No. 8 berth: 33 ft. MLWST; 570 ft. LOA.

Also see "Developments"

TUGS: Texaco Trinidad Inc. maintains three tugs to assist in berthing.

FRESH WATER: Available alongside or by barge (if available and adequate notice given prior arrival).

FUEL: All grades supplied alongside or by barge.

SPECIAL PRECAUTIONS: Tankers loading or discharging.

Bonding: When a ship has docked, the bonding cable and hose shall be connected.

Weather: Loading and discharging of dangerous petroleum may be stopped during an electrical storm and ullage screens or ullage plugs must be put in place.

Emergency alarm: This safety device is conveniently placed on all docks and is under the control of the jetty personnel. This is used only in cases of emergency and has the effect of stopping all shore pumps immediately it is used. Loud-sounding horns are situated on the hose structures and are sounded by the jetty attendant when urgent attention from the ship is required.

Hose pressure: The max. discharge pressure allowed on the jetty hose is 130 pounds. Pressure of jetty hose for loading shall not exceed 130 pounds.

Hot work: No burning, welding or major repairs can be carried out in the harbour without permission. Repairs involving hot work may be started only if a permit has been issued and the necessary gas-free certificate granted by the Company's qualified inspector.

Hoses: Loading hoses are connected up by dock personnel, but must be supported by ship's tackle at the rail during loading or discharging. Ship's officers should keep a close watch on the hose during operations and stop loading and/or discharging operations if anything untoward happens to the hoses. A drip pan is to be placed under all hose connections in use, After loading fuel oil, Marine diesel or NOR, air is used for displacing hose contents into the vessel before being disconnected. For all other products the hose is drained into ship's tanks or jetty slop tank.

Towing wires: On completion of mooring on arrival, a suitable wire shall be hung over the bow and stern on the side away from the dock so that, in an emergency a tug can tow the ship off. The wire should be properly secured on board and it should be long enough to reach the water's edge at the ship's lightest draft.

No Smoking: Smoking is prohibited on all the piers and launches. Smoking on board ship is permitted only in those enclosed spaces that are specifically designated by the Master as "Smoking Areas".

Tank Lids: Tank lids must be closed while handling cargo, and at all other times if tanks are not free of gas. Flame screens must be in position on all open ullage plug holes.

GANGWAY/DECK WATCHMEN: An efficient watch must be maintained on deck and in the engine room of all ships in port, and a sufficient number of men must be on board at all times to move the vessel either for harbour operations or in emergency situations.

CUSTOMS ALLOWANCE: 200 cigarettes and moderate amount of spirits.

IDENTIFICATION CARDS: Not required.

MEDICAL: Advance notice of medical attention preferred. Modern hospital facilities.

TELEPHONES: On dockside and at all sea berths.

SHORE LEAVE: Crew not allowed ashore at Pointe-a-Pierre. Regular launch service from ship to San Fernando, 3 miles away.

DEVELOPMENTS: Dredging of the Pointe-a-Pierre harbour carried out a few months ago (Summer 1978) has not been fully accomplished and, therefore, the draft alongside the undermentioned berths has been restricted to the following depths until final completion of dredging which is expected by year end 1978.

	MLWST
No. 1 Berth	37 ft. 6 in.
No. 2 Berth (North)	37 ft. 0 in.
No. 2 Berth (South)	22 ft. 0 in.
No. 3 Berth (North)	35 ft. 0 in.
No. 3 Berth (South)	20 ft. 0 in.
No. 4 Berth	23 ft. 0 in.
No. 5 Berth	39 ft. 0 in.
No. 7 Berth	36 ft. 0 in.
No. 8 Berth	28 ft. 6 in.

AGENT: See "Port of Spain".

POINT FORTIN: 10.12 N. 61.42 W. (See Plan Book)

DOCUMENTS/HEALTH/CONSULS, etc.: Refer to 'Port of Spain".

PILOTAGE: Pilotage is compulsory. Pilots board 0.5 miles off main jetty (Lat. 10° 12' N. Long. 61° 42' W.).

ANCHORAGE: There is safe anchorage 0.5 miles off the head of the jetty.

MAX. SIZE: Jetty 2 miles long with "T" head providing two outer berths of 700 ft. length and a depth of 38 ft. 1 inner berth of 300 ft. length and a depth of 35 ft. and other inner berths of 300 ft. length with a depth of 15 ft. 6 in.

1 conventional buoy mooring (6-buoy mooring) of 850 ft. length and a depth of 53 ft. situated 4,819 ft. North off jetty head.

TUGS: Required for berthing at outer berths for vessels of 30,000 d.w.t. and over and for unberthing vessels with a draft of 36 ft. or deeper. Also required for berthing and unberthing at conventional buoy mooring. Launch assists in berthing and unberthing.

BERTHING: Bottom alongside, mud; back pressure (hose), 100 lb; Current, flood S.W., ebb N.E. 2 to 5 knots; rise and fall tide, 4 ft.

FRESH WATER: Not available at CBM.

FUEL: Not available at CBM.

DIRTY BALLAST: No facilities available. Only small amount (approx. 200 tons) tank drainings acceptable on jetty and only if fluid at ambient temperature.

PRECAUTIONS: Normal oil terminal safety precautions applicable.

GANGWAY/DECK WATCHMEN: Customs guards on duty at ship's side.

CUSTOMS ALLOWANCE: 200 cigarettes, and a moderate amount of spirits.
IDENTIFICATION CARDS: Not required.
REPAIRS AND DRY DOCKS: At Chaguaramas.
MEDICAL: All facilities available.
REPATRIATIONS: Can be arranged.
AIRPORT: See "Port of Spain".
TIME: GMT minus 4 hours.
TELEPHONES: No facilities for telephones on board.
SHORE LEAVE: No restrictions.
SHIPMASTER'S REPORT: April 1977

The port of Point Fortin is situated in South West Trinidad. The light beacon on the "T" pier head is in position Lat 10° 12′ 05″ N. Long. 61° 42′ 06″ W. The port is owned and operated by the Trinidad and Tobago Oil Company Ltd. (TRINTOC), to serve the 100,000 bbls. per day refinery at Point Fortin. A 24 hour communications service is provided, telex via international lines (TRINTOC Point Fortin) or VHF 16 (Call sign: Point Fortin Shipping) working on Channel 11.

Pilotage is compulsory with the boarding area 1 mile seaward from the jetty head. There is 1×1,000 h.p. tug normally available for berthing vessels over 30,000 Summer d.w.t.

Tides in the area of Point Fortin vary in strength throughout the year with a max. rate of 3 knots. Masters are advised to check sea water density for corrected loadline readings. Water density varies throughout the year from salt to fresh.

Engine repairs which entail immobilisation of engines are not permitted when moored at the berths.

Vessel must arrive with clean ballast consistent with safe manoeuvring of the ship. A ballast condition of 25% of the vessels Summer d.w.t. is recommended.

Only clean ballast may be pumped overboard.

Notice of readiness is accepted when vessels' tanks are ready to receive cargo.

Bunkers and fresh water can be supplied at all berths except No. 5 (C.B.M.) Stores and laundry facilities are available on request. A diver is available. The only way of getting ashore is by means of a liberty launch. Walking the pipe-line bridge is strictly forbidden.

Inward Clearance is effected immediately on arrival by the Port Authorities; the following documents should be available for official use:

Clearance from Last Port.
Deratization Certificate
International Health Certificate
Declaration and Crew Vaccination Certificate
Cargo Manifest, if any
Bill of Lading, if applicable
List of unmanifested packages, if applicable
3 Copies arrival Report
7 Copies Crew List
3 Copies Store List
3 Copies Personal Effects
License for Dangerous drugs, if any aboard.

In the interest of reducing tanker port time, vessels' Masters are advised to request Pratique by Radio prior to their arrival.

Berths:

No. 1 – Draft 37 ft. 6 in. (Loading over tide 39 ft.).
Max. length 700 ft. – Max. berthing displacement 45,000 tons.
Grades handled: Crude oil, Fuel oil, Gas oil, Diesel oil, Kero, LDF, JP4, Platformate. All via 10 in. hoses. Napthanic Oil Residue via 4 in. hose.

No. 2 – Draft 36 ft. (Loading over tide 38 ft.).
Max. length 700 ft. Max. berthing displacement 25,000 tons.
Grades handled: Crude oil, Fuel oil, Gas oil, Diesel oil, Platformate, Kero, LDF, JP4, Mogas. All via 10 in. hoses. (Napthanic Oil Residue via 1×4 in. hose).

No. 3 – Draft 34 ft. 6 in.
Max. length 300 ft. max. berthing displacement 5,500 tons.
Grades handled: Fuel oil, Diesel oil, Gas oil, Kero, Mogas, all of them through 6 in. hoses.

No. 4 – Draft 14 ft. 6 in.
Max. length 300 ft. Max. berthing displacement 3,000 tons. Berth port side to. Berthing at slack water and flood tide, unberthing at slack water tide and flood tide.
Grades handled: Fuel oil, Diesel oil, Gas oil, LPG, Bitumen, Emulsion (COLAS).

No. 5 – C.B.M., 6 buoys, max. draft 51 ft. max. length 850 ft. Berth either side. Daylight berthing only.
Grades handled: Crude oil, Fuel Oil via 2×16 in. hoses.

AGENT: See "Port of Spain".

POINT LISAS: 10.22 N. 61.29 W.

DOCUMENTS:

7 Copies Crew List.
2 Copies Ship's Stores List.
1 Copy Crew Stores List.
4 Copies Immigration arrival Report (supplied on arrival).
1 Declaration of Health (supplied on arrival).
Ship's Register.

PILOTAGE: Pilots ordered through Agent; 48/24/12 hour ETA needed. Pilotage is compulsory. Pilots board at Head of Pt. Lisas Channel (10° 22′ 37″ N. 61° 39′ 38″ W.); Pilot ladder conforming to International Safety Regulations to be supplied by vessel.

Launch hire arranged by Dock Master to take out Pilot to vessels on arrival, and again take off Pilots from vessels on departure.

CLEARANCE: Point Lisas being a port of entry is equipped with resident Customs Officer and Guard. Ships arriving from abroad could proceed directly to Point Lisas as Customs officer acts for Harbour Master/Immigration/Port Health. Tel. 659 2221.

ANCHORAGE: Safe anchorage 0.25 miles off head of channel. On occasions, when port congested, vessels may be requested to anchor Port of Spain Roads (10° 41′ N. 61° 33′ W.) before proceeding Pt. Lisas.

RESTRICTIONS: No restrictions on night entry – departure.

MAX. SIZE: Point Lisas "Liquid Pier" (vessels handling bulk sugar, molasses, caustic soda and Anhydrous Ammonia in Liquid form), Maximum LOA: 550 ft. Maximum draft: 28 ft. LW.

Point Lisas "Solids Pier" (vessels discharging plant equipment, and loading sulphuric acid in drums and bagged and bulk fertiliser). Maximum LOA: 400 ft. Maximum draft: 20 ft. LWOST.

HEALTH: Crews of vessels arriving must have valid Vaccination Certificates, covering smallpox. If not in possession, Master should advise when giving ETA and Port Health Officer will vaccinate on arrival.

For quarantine if required, or authentication of vaccination certificate, Honorary Port Health Officer could be in attendance at short notice. Tel. 656 2311.

VHF: Pt. Lisas Dockmaster can be contacted on VHF Channels 16, 14 and 12.

TUGS: Molasses, bulk sugar and LPG carriers use a tug to assist in berthing and unberthing at Pt. Lisas "Liquid Pier". Tug will be ordered by the Agent.

STEVEDORES: If necessary will be ordered by Agents. No ETA to stevedores necessary.

FRESH WATER: Supplied at both piers. Also by barge.

FUEL: All grades supplied by barge. At "Solids Pier" gas oil only can be supplied ex shore installation.

FIRE PRECAUTIONS: When loading LPG. No smoking on pier or on ship's deck.

GANGWAY/DECK WATCHMEN: Customs guards on 24 hours duty at ship's side.

OPENING/CLOSING HATCHES: Normally by crew.

CUSTOMS ALLOWANCE: 200 cigarettes and a moderate amount of spirits.

IDENTIFICATION CARDS: Not required.

CONSULS: At Port of Spain.

REPAIRS AND DRY DOCKS: At Chaguaramas 20 miles North of Pt. Lisas.

HOLIDAYS: New Year's Day (January 1st); Good Friday; Easter Monday; Whit Monday; Corpus Christi; Discovery Day (August 8th); Independence Day (August 31st); Diwali Day (late October/early November); Eid-ul-Fitr (December 21st-22nd, approximately); Christmas Day (December 25th); Boxing Day (December 26th); Labour Day (June 19th); Republic Day (September 19th). Work is possible, except for Labour Day, on these holidays.

POLICE/FIRE/AMBULANCE: Accidents — Police — Help, 62999; Fire — First Aid, 62998; Foreign Calls, 6216, 35900, 31913.

MEDICAL: Advance notice of attention required will assist. Modern hospital facilities available.

REPATRIATIONS: Crew changes and repatriation can be arranged.

AIRPORT: Piarco International Airport — 30 miles from Point Lisas. Daily flights to world-wide destinations.

TIME: GMT minus 4 hours.

TELEPHONES: No facilities for telephones on board.

SERVICES: Efficient maintenance gang available for normal work, tank cleaning, painting, etc.

SHORE LEAVE: No restrictions.

DELAYS: Due to congestion, sometimes delays are unavoidable, usually not more than 24 hours.

DEVELOPMENTS: Dredging of the channel is taking place and initially the depth will be 32 ft. increasing to 42 ft. when completed in 1980.

AUTHORITY: Federation Chemicals Ltd.

AGENT: Melville Shipping and Trading Ltd., Steamship Operators and Agents, 68/70 Sackville Street, Port of Spain. Tel. 54060, 54218, 52384, 54977, 54287. Telex POS 265. Cables "Meltra". Code: New Boe. Bankers: Royal Bank of Trinidad & Tobago Ltd. AO Tel. 662-5177, 41950, 41925, 22212.

PORT OF SPAIN: 10.39 N. 61.32 W. (See Plan Book)

DOCUMENTS:

For Immigration. On boarding, 3 Crew Lists and 3 Passengers Lists if passengers on board. Inspection of Derat. Certificate. Health Declaration and arrival report forms supplied by Immigration on boarding to be made up. Passengers and Crew must have valid smallpox certificates.

For Customs. 2 Crew Lists and 1 Passengers List if passengers on board, 2 Customs Ship's Stores Lists, 1 Crew's Stores List. Forms supplied boarding.

Port doctor will board if calling from quarantine port. No forms required other than inspecting smallpox certificates of crew and passengers.

PILOTAGE: Not compulsory to Port of Spain anchorage but if required will attend from outside Bocas or where required through Agents in ETA message. Calling Pilot International Code Flag "H" by day and white light over red at night or International Code signal "G" on whistle.

Gangway or standard type pilot ladder with spreaders about 10 ft. apart. Ladder must be clean. It is desirable that 1 stanchion be securely fitted in the bulwalk at the top of the ladder.

Pilot station is situated on Port of Spain Wharf.

ANCHORAGE: Depends entirely on draft but should not be nearer than 0.5 miles from Grier Channel entrance, except in cases of vessels loaded with explosives; this anchorage is clearly defined on Chart.

Open roadstead in Gulf of Paria but can be considered as sheltered with choppy seas at times. Bottom shelves gradually from shoreline to 7 fathoms at Western end of harbour limits, increasing to 20 fathoms outside harbour limits Westward. Type of bottom, mud. Swinging area unlimited. No mooring buoy. Distance from anchorage to shore 2.25 miles at 5 fathoms to 5 miles at 7 fathoms, vessel will swing to the tide if loaded, and to the wind if light.

Currents 0.5 to 1.5 knots flood and ebb rise and fall of tides, variable minimum 1 ft. 5 in. maximum 4 ft. Rainy season June-December. Dry season December-June not always predictable. Rain squalls occur during months of July, August and September up to 30 to 40 knots unpredictable hurricane most unusual. Prevailing winds are mostly Easterly. Normally stronger during daylight.

RADIO: Advise through North Post wireless or telephone, call sign 9 YL. ETA 48 hours and 24 hours with other requirements.

RESTRICTIONS/MAX. SIZE: The Grier Channel, 350 ft. wide, leads to a dredged basin in which are the docks. No restrictions length, but maximum draft in channel, in basin and alongside is 32 ft.

HEALTH: Crews of vessels arriving must have valid Vaccination Certificates, covering smallpox. If not in possession, Master should advise when giving ETA and Port Health Officer will vaccinate on arrival.

TUGS: There are 3 tugs in Port of Spain to assist in docking operations.

BERTHING: *Container Terminal:* The new Container Terminal at Berth 6A includes 1,085 ft. of deep water berth which links King's Wharf and King's Wharf Extension. The total paved back-up area covers 15 acres and is used exclusively for the handling of containers. The Container Terminal is serviced by the existing Sheds 9 and 10 with a total covered space of 162,000 sq. ft. In addition, there are 27 acres of paved space designated for the handling of containers.

The Container Terminal is equipped with two 40-ton Paceco gantry quay cranes. The outreach of the cranes is 115 ft. with a backreach of 50 ft. In addition, 2 rubber tyred yard gantry cranes manufactured by Diamond Manufacturing Co. were commissioned in September, 1977. These cranes are capable of straddling 5 rows of containers plus a truck lane.

It is estimated that the Berth 6A Container Terminal with its full back-up facilities is capable of handling 80,000 t.e.u.'s per annum.

King's Wharf: Length 3,900 ft. Berthing for 6 vessels with max. draft of 30 ft. 5 transit sheds available (Nos. 1-5). Apron width 50 ft.

King's Wharf Extension: Length 1,200 ft. Berthing for 2 vessels with max. draft of 30 ft. 2 transit sheds available (Nos. 7-8). Apron width 75 ft.

Large cruiser vessels berth at No. 5, 6 and 7. Vessels with length in excess of 525 ft. are unable to berth at No. 1 berth as width of basin is 700 ft.

STEVEDORES: Labour on Docks and labour on ships: Controlled by Port Contractors Ltd. Ordered by Agents. Gang size on Docks: 14 to 18 men. Gang size on vessels: 13 men, 1 gangman, 2 winch drivers, 8 hold men, 1 cooper, and 1 hatch foreman.

CARGO HANDLING: One berth on the Eastern side is an open wharf without a seafront warehouse. This berth is strictly used for containerised and passenger (cruise) vessels. The Eastern wharf is 3,300 ft. with five seafront warehouses. On the Western side the wharf is 1,200 ft. long with two seafront warehouses for general cargo, but at these two berths there are also facilities for receiving bulk cargo, i.e. grain, liquid oil, fats and molasses. These cargoes are usually discharged by vessel's equipment, but grain can be discharged by shore equipment at a slower rate.

There is now one floating crane, 60 tons capacity, one crawler crane of 160 tons capacity and also one 125-ton fork lift handling 20 ft. containers. There is also a trailer service for 20 ft. containers from dock to consignee's warehouse.

FRESH WATER: Supplied alongside all berths. Also available by barge.

FUEL: All grades supplied by barge.

GANGWAY/DECK WATCHMEN: Customs guards on 24 hours duty at ship's side.

OPENING/CLOSING HATCHES: This is handled by stevedores.

CUSTOMS ALLOWANCE: 200 cigarettes and a moderate amount of spirits.

CARGO GEAR: Vessels normally load and discharge with their own gear but shore cranes and heavy lift cranes available on the dock.

IDENTIFICATION CARDS: Not required.

CONSULS:

Belgium	6238711	Italy	6236255
Bolivia	6254123	Japan	6232866
Columbia	6236601	Lebanon	6231652
Costa Rica	6254123	Liberia	6222322
Denmark	6251901	Mexico	6254040
Dominican Republic	6241217	Norway	6236871
El Salvador	6226247	Panama	6223497
Greece	6232186	Portugal	6234930
Guatemala	6252441	Spain	6238851
Haiti	6232876	Sweden	6232166

EMBASSIES:

Argentina	6254069	India	6231276
Brazil	6225779	Jamaica	6224995
Britain	6252861	Netherlands	6251722
Canada	6234787	U.S.A.	6226471
France	6251437	Venezuela	6253872
Germany	6251898		

REPAIRS AND DRY DOCKS: See "Chaguaramas".

HOLIDAYS: New Year's Day (January 1st); Good Friday; Easter Monday; Labour Day (June 19th); Whit Monday; Corpus Christi; Discovery Day (August 5th); Independence Day (August 31st); Diwali Day (late October/early November); Eid-ul-Fitr (December 21st/22nd, approximately); Christmas Day (December 25th); Boxing Day (December 26th).

POLICE/FIRE/AMBULANCE: Accidents — Police, 62999; Fire — First Aid, 62998.

MEDICAL: Advance notice of attention required will assist. Modern hospital facilities available.

REPATRIATIONS: Crew changes and repatriation can be arranged.

AIRPORT: Piarco International Airport — 17 miles from Port of Spain. Daily flights to world-wide destinations.

TIME: GMT minus 4 hours.

TELEPHONES: No facilities for telephones on board.

SERVICES: Efficient maintenance gang available for normal work, tank cleaning, painting, etc.

Shipping Service: Three government-owned vessels, *Scarlet Ibis*, *Bird of Paradise* and *Tobago* operate a regular passenger and cargo service between Trinidad and Tobago.

SHORE LEAVE: No restrictions.

AUTHORITY: Port Authority of Trinidad and Tobago.

AGENT: Sprostons (Trinidad) Ltd., 29 Frederick Street, P.O. Box 8, Port of Spain. Tel. 62-34121-9 (nine lines). Telex SPROS WG286 Cables: "Sprostons", Port of Spain, Trinidad.

SOBO (Pitch Point): 10.15 N. 61.37 W.

Crude Oil Terminal operated by B.P. Trinidad Limited. Vessels from abroad calling at Sobo are required to proceed to Brighton for clearance formalities.

DOCUMENTS/HEALTH/CONSULS, etc.: Refer to "Port of Spain".

PILOTAGE: Compulsory.

TUGS: Not used. Launch assists berthing.

RESTRICTIONS: Berthing/unberthing only on flood tide.

MAX. SIZE: Controlled by depth alongside jetty — 29 ft.

BERTHING: Vessels moored with springs on jetty. Other lines to buoys.

FRESH WATER: Not available.

FUEL: Available by barge.

AGENT: See "Port of Spain".

TEMBLADORA (Alcoa Bauxite Terminal): 10.41 N. 61.35 W.

DOCUMENTS/HEALTH/CONSULS, etc.: Refer to "Port of Spain".

PILOTAGE: Pilotage is compulsory. Pilots board 0.5 miles off installation.

ANCHORAGE: Safe anchorage 0.5–0.75 miles off head of jetty.

MAX. SIZE: Max. draft 35 ft. and 35,000 d.w.t.

TUGS: Alcoa maintain their own tug to assist in docking operations.

BERTHING: There are two wharves: No. 1 with a length of 976 ft. and No. 2 with a length of 675 ft. Both are dredged to 36 ft.

STEVEDORES: Not necessary.

FRESH WATER: Supplied at both piers, also by barge.

FUEL: All grades by barge.

GANGWAY/DECK WATCHMEN: Customs guards on duty at ship's side.

OPENING/CLOSING HATCHES: Handled by crew.

CUSTOMS ALLOWANCE: 200 cigarettes and a moderate amount of spirits per man.

CARGO GEAR: As "Port of Spain". Loading: Carried out with travelling tower conveyor system, rate 1,200 t.p.h. Discharging: With travelling towers grabs two each 5 tons capacity rate 800 t.p.h.

IDENTIFICATION CARDS: Not required.

REPAIRS AND DRY DOCKS: At Chaguaramas.

MEDICAL: All facilities available. Advance notice of requirements should be given.

REPATRIATIONS: Can be arranged.

AIRPORT: See "Port of Spain".

TIME: GMT minus 4 hours.

TELEPHONES: No facilities for telephones on board.

SHORE LEAVE: No restrictions.

AGENT: See "Port of Spain,,

Tunisia

BIZERTE: 37.17 N. 09.54 E.

PORT LIMITS: Commence 0.5 mile from the Port.

DOCUMENTS:
5 Crew Lists.
5 Passenger Lists.
4 Crew Personal Effects Lists.
4 Ships Stores List.
1 Copy Exemption.
3 Copies Bill of Lading.
3 Copies Manifest.
Health Declaration.

PILOTAGE: Vessels approaching the port applying for Pilot by day by flying the flag "G". Advise Pilot of ETA 48 hours before arrival. Pilot vessel and pilot station may be contacted by VHF Channel 16. The Pilot boat exhibits the letters "P" & "H". The Pilot boards half a mile from the Southern fairway, vessels have to slow down to enable the Pilot to board. The anchorage for vessels awaiting the Pilot is half a mile from the Southern fairway.

ANCHORAGE: See "Pilotage".

RESTRICTIONS: Entry at night is forbidden for tankers.

MAX. SIZE: See "Berthing".

HEALTH: Free pratique normally given at the quays after mooring. Pratique is automatic for vessels coming from another Tunisian port. In case of suspected disease on board vessel will be ordered to quarantine anchorage.

RADIO: Tunis Radio.

VHF: Channel 16.

TUGS: The tugs join the vessel at half a mile from the fairway. The 2 tugs available are equipped with radar.

BERTHING: There are 10 alongside berths in the 3 docks at Bizerte and 3 alongside berths at Menzel Bourguiba. The water is salt. Length of the main quays: 360 m., depth 9.15 m.
Length of the oil handling berth "A": 200 m., depth: 8.50 m.
Length of the oil handling berth "B": 150 m., depth: 8.50 m.
Molasses handling berth, depth: 7.5 m. Berth in front of the silo: depth 8.50 m. Iron ore handling berth "Douaria": depth 8.50 m. Berth in front of the cement factory: depth 7.6 m. Wooden wharf No. 2 at Menzel Bourguiba depth; 8 m.

Load and discharge is carried out by ship's own gear.

CRANES: 1 travelling gantry crane, capacity 6 tons. 2 travelling gantry cranes, capacity 3 tons. 1 crane car, capacity 6 tons. 1 crane car, capacity 3 tons. 1 fork lift, capacity 7 tons. 2 fork lifts, capacity 3.5 tons. 2 tractors with tipping wagons. 1 floating pontoon crane of 30 tons.

BULK HANDLING FACILITIES: Grain is handled on the main quay, if cargo in bulk it is loaded into bags. Fertilizer also handled in bags. Ore and coal is unloaded into lorries.

SPECIAL CARGO HANDLING FACILITIES: None.

BRIDGES: None.

STEVEDORES: Minimum of 24 hours advance notice of ETA to Agent is required.

MEDICAL: Doctor available to board vessel. Hospital, private clinics and all facilities available. 48 hours notice required for Smallpox, Cholera, and Yellow Fever inoculations. Advise Agent of requirements.

TANKERS: Crude oil load/discharge line 20 in. diameter. Fuel oil load/discharge line 14 in. diameter. No slop discharge facilities. Tugs stand-by during cargo operations.

FRESH WATER: Available from the quay at most berths. Rate 20 cu.m.p.h.

FUEL: Not available.

FIRE PRECAUTIONS: The Petrol Harbour is equipped with fire hydrants. A tug of 1,200 h.p. is required to be permanently standing by when tankers are moored alongside the quay.

GANGWAY/DECK WATCHMEN: It is recommended to employ shore watchmen.

OPENING/CLOSING HATCHES: Carried out by stevedores.

CUSTOMS ALLOWANCE: Each crew member is allowed 1 carton of cigarettes and 1 opened bottle of wine or spirits. In case of a prolonged stay in port, Customs may renew these quantities.

IDENTIFICATION CARDS: Crew members' identification cards will be collected by the Immigration service and exchanged for shore passes while vessel is in port.

CONSULS: Italy Tel. 02.31.747.

REPAIRS: Some types of deck and engine repairs can be effected.

DRY DOCKS: There are 4 dry docks which are located at Menzel Bourguiba.

Dry Dock No. 1 & 4	length	190.90 m.
	higher width	30.25 m.
	lower width	26.50 m.
	draft	8.80 m.
Dry Dock No. 2	length	247.50 m.
	higher width	40.60 m.
	draft	12.00 m.
	lower width	36.00 m.
Dry Dock No. 3	length	84.10 m.
	higher width	14.78 m.
	lower width	13.00 m.
	draft	4.15 m.

SURVEYORS: Bureau Veritas.

REPATRIATION: Can be arranged.

AIRPORT: Tunis/Carthage airport is situated 70 km. from Bizerte. Served by international airlines.

TIME: GMT plus 1 hour all year round.

HOLIDAYS: There are 17 days official holiday during the year. Work can be carried out on all holidays except 1st May on payment of 100% overtime.

POLICE/FIRE/AMBULANCE: Police Tel. (02)31.200; Fire (02)31.022; Ambulance (02)31.422.

TELEPHONES: No arrangements exist.

SHORE LEAVE: Allowed.

AUTHORITY: Direction du Port de Bizerte.

LA GOULETTE (Including Tunis): 36.49 N. 10.18 E.

DOCUMENTS: *Required by Police:*
2 Crew Lists.
2 Passenger Lists.
Required by Customs:
1 Crew List.
2 Passenger Lists.
2 Crew Manifests.
Required by Port Health:
1 Crew List.
1 Passenger List.

PILOTAGE: To call Pilot contact Goulette Radio station, call sign 3VW, 24 hour watch on 2182 kc/s. or VHF Channel 16. Pilot boats are in permanent direct contact with Goulette Radio. International code visual and sound pilot signals may be used on arrival at the sea buoy.

Pilot launches are stationed inside the port, and proceed on call to meet vessels about 0.25 mile beyond the sea buoy, i.e. the buoy No. 1 in the entrance channel to the port.

ANCHORAGE: Anchorages in the port roads are safe except during strong winds and heavy seas from the North or N.E.; good holding ground.

Larger vessels anchor about 0.5 miles N.E. of the sea buoy in depths of 12-14 m. Small vessels may anchor either North or South of the approach channel in depths of 7-9 m. in the vicinity of buoys Nos. 4 and 5 provided that they do not obstruct navigation in the entrance channel.

RESTRICTIONS: Tankers and ore carriers are not allowed to enter and leave port during the hours of darkness. Depth of water at low water is 32 ft.

MAX. SIZE: *La Goulette:* up to max. draft 32 ft. Max. length 200 m. *Tunis:* up to max. draft 21 ft. 6 in.

HEALTH: Master is required to complete Declaration of Health on arrival. Vessels which have previously called at another Tunisian port are given automatic free pratique except in time of epidemic.

RADIO: Tunis Radio 24 hour watch on 2182 kc/s, radio-telephone watch from 0600 to 2200 hrs. on 500 kc/s. Goulette Radio call sign 3VW 24 hour watch on 2182 kc/s. and VHF Channel 16.

TUGS: Are available to assist berthing as directed by the Pilot. Tugs join vessels in the vicinity of buoys Nos. 4 and 6, that is 400 or 500 m. from the berths. Vessels lines always used.

BERTHING: *La Goulette:* one ore berth, unloading rate 2,000 t.p.h.

STEVEDORES: Gangs are ordered before 0600 hrs. for morning work; before 1300 hrs. for the afternoon and before 2000 hrs. for night work.

MEDICAL: Preferable to advise Agent in advance if doctor required on board. Crew members should possess international vaccination certificates.

TANKERS: One berth is reserved for tankers with a max. draft of 27 ft. 6 in.

FRESH WATER: Hydrants are situated on the quays supplying fresh water at a rate of 12-15 cu.m.p.h. A water barge of 50 tons capacity can supply vessels at anchor.

FIRE PRECAUTIONS: A watchman has to be permanently employed on board tankers when alongside. A tug equipped with fire-fighting equipment is required to stand by tankers discharging.

GANGWAY/DECK WATCHMEN: The employment of gangway watchmen is necessary.

OPENING/CLOSING HATCHES: Are performed by ship's crew .

CUSTOMS ALLOWANCE: Each crewman is allowed two packets of cigarettes or 4 cigars or 50 gr. of tobacco and one opened bottle of alcohol.

CONSULS: Following countries are represented in Tunisia:
Algeria
Australia
Denmark
France
Great Britain
Greece
Italy
Morocco
Norway
Panama
U.S.A.
Venezuela

REPAIRS: Machinery and boiler repairs can be effected on board. For large repairs it is necessary to send part to the Shipyards of Soconema at Menzel Bourguiba 70 miles away.

DRY DOCKS: At Menzel Bourguiba 4 dry docks, the largest of which is 253 m. long, 41 m. wide, 10.5 m. depth.

REPATRIATION: Can be arranged.

AIRPORT: Situated 10 km. from the port. Regular daily flights to Europe and N. Africa.

TIME: GMT plus 1 hour. No alterations during the year.

HOLIDAYS: 20th March (Independence Day); 1st May (Labour Day); 25th July (Republic Day); 15th October (Evacuation Day). In addition there are 13 other holidays on which work is carried out on payment of overtime.

POLICE/FIRE/AMBULANCE: Tunis Police, tel. 5389; Goulette Police, tel. 275.028; Fire. 198; Ambulance 260.022.

Telephones can be connected on board vessels and are compulsory for tankers.

SHORE LEAVE: Crew members are permitted to go ashore after obtaining a pass from the Port Police.

AUTHORITY: Director of the Port, Office des Ports Nationaux.

LA SKHIRRA (Terminal Platform): 34.18 N. 10.09 E. (See Plan Book)

DOCUMENTS:

5 Crew Lists.
2 Lists of Crew Personal Effects.
2 Stores Lists.
5 Passenger Lists, if passengers carried.
Manifest of cargo on board.
Manifest of cargo in transit.

PILOTAGE: Compulsory for berthing alongside. Pilot employed by TRAPSA. ETA required 48 hours and 24 hours before arrival. Call Pilot by international code signals on arrival, or by VHF Channel 16. TRAPSA will advise if vessel required to anchor, or berth immediately. Pilot boards 2 miles off the terminal by black and white motor launch. If it is necessary (vessel without chart) Pilot will proceed outside the port limits.

ANCHORAGE: Vessels should anchor outside the prohibited zone which is limited to the South by the parallel of Buoy No. 5 and to the East by bearing 350° from the terminal platform light.

MAX. SIZE: Length 300 m. Draft 47 ft. 6 in. or up to 51 ft. at high water.

HEALTH: International Quarantine signals to be shown on arrival. Vessels normally receive free pratique at the quay after berthing. Suspect vessels must wait at anchor until pratique is given.

RADIO: TRAPSA operate coastal station Laskhirra Radio (3VP). Messages for TRAPSA passed by other stations should be addressed Rapetrol Laskhirra.

VHF: The harbour office and loading terminal are equipped with VHF on the following channels: 156.8 Mc/s (calling), 156.6 Mc/s., 156.7 Mc/s., 156.55 Mc/s. Contact with tugs can be made on all 4 channels.

TUGS: Two tugs 1,500 h.p. each, normally used for berthing. Lines provided by tugs.

BERTHING: Two loading berths situated one each side of terminal platform connected by a gangway from the shore. For safe manoeuvring tankers are recommended to arrive with ballast up to 30% of summer deadweight. Mooring may need to be doubled during months of December to April, when sudden violent squalls sometimes occur. A vessel alongside requiring tug assistance may sound one long blast at frequent short intervals.

Depth alongside loading berths is 15 to 16 m. Loading platform is served by three 30 in. oil pipe-lines and two 24 in. ballast lines. Each berth equipped with four 12 in. flexible hoses. Max. loading rate 12,000 cu.m. per hour.

MEDICAL: Advance notice required of any medical assistance needed. Hospital facilities available. Crew members require valid vaccination certificates.

BALLAST: All ballast, except permanent, to be pumped to shore installation. Heavy fines for water pollution. Max. rate 6,000 cu.m. per hour.

FRESH WATER: Not available.

FUEL: Not available.

CUSTOMS ALLOWANCE: 2 packets cigarettes allowed each Crew man. No alcohol allowed.

CONSULS: Following countries are represented at Sfax: France, Sweden, Great Britain, Netherlands and Italy.

REPAIRS: There are no facilities for repairs. Nearest at Sfax.

REPATRIATION: Can be arranged.

AIRPORT: Nearest at Tunis 350 km. away.

TIME: GMT plus 1 hour all year round.

SHORE LEAVE: Not allowed in Trapsa installation. Can be arranged through Agent.

AUTHORITY: T.R.A.P.S.A.

SFAX: 34.44 N. 10.46 E.

DOCUMENTS: Within 24 hours of arrival Masters must submit a written declaration giving the name of ship and of the Master, Owner or Charterer, vessel's tonnage, draft, cargo, port of origin and destination, number of crew on board. Also required:

Customs Manifest.
Crew List for Police.
List of Dangerous Cargo.
Health Declaration.

PILOTAGE: Compulsory for all vessels over 100 gross tons. Pilotage commences at the outer buoys of the entrance channel. Day signals for Pilot, International Code Signal "P.T" or Code flag "S" hoisted alone or below code pennant. Night signals according to International rules. For entry at night, vessels must radio Harbour Master at the latest one hour before sunset to confirm their intention. Before boarding, Pilot will check that vessel does not exceed the max. authorised draft. If the "Entry Prohibited" signal is not hoisted at the port signal mast, vessel may await Pilot in the channel axis about 1 mile off the outer buoys. Pilot boards from a launch 11 m. long, displaying international pilot signals. Pilot may be contacted by radio through Radio Port de Sfax. Agent must give advance notice of vessels arrival to Harbour Master 24 or 48 hours beforehand.

ANCHORAGE: In immediate vicinity of the port, depths up to 15 m., good holding ground.

MAX. SIZE: Length 192 m., beam 26 m., draft 33 ft.

HEALTH: To request free pratique, hoist "Q" flag on arrival, or radio to Port Health Service. Pratique normally given at the berth after mooring. Suspect vessels are required to wait at anchor until pratique is given.

RADIO: Sfax. Port Call—call sign 3VW2, operating from 05.00-09.00 and 15.00-19.00 hrs. GMT.

Calling frequency 2182 kc/s., working frequency 1743 kc/s. CR3. Used only for communications with port services. Meteorological information provided on request.

TUGS: Join vessel at outer buoys or according to circumstances in the outer port.

BERTHING: N.E. Quay 820 m. long phosphate berth.
West Quay 150 m. long phosphate berth.
Petrol Pier 105 m. long Max. size: length 180 m., draft 33 ft.
Salicole Pier salt loading berth.

STEVEDORES: Available, arranged by Agent basis vessel's ETA.

MEDICAL: Advance notice preferred if medical attention required. Hospital facilities available. Vaccination certificates required for all crew.

DENSITY: 1025.

FRESH WATER: Hydrants fitted on all quays. Written request for replenishing water is required by Harbour Master.

FUEL: Available by barge.

DEVELOPMENTS: Entance channel to be widened to 60 m. Dredging to 12.50 m. of channel and principal quays. These projects are under study.

GANGWAY/DECK WATCHMEN: Normally ship's crew. Available from shore if required.

OPENING/CLOSING HATCHES: Normally performed by crew.

IDENTIFICATION CARDS: Required by all crew.

CONSULS: Local representatives for France, Great Britain, Netherlands, Norway, Sweden, Denmark, Spain, Italy, Greece, Portugal and Belgium.

REPAIRS: Small engine repairs can be effected. Floating dock for vessels less than 350 tons.

REPATRIATION: Can be arranged.

AIRPORT: There is an airfield 7 km. from the city. No regular services.

TIME: GMT plus 1 hour.

HOLIDAYS: 1st January; 18th January; Aid El Kebir; Hegirian New Year; 20th March; 9th April; 1st May; Mouled; 1st and 2nd June; 25th July; 3rd August; 13th August; 3rd September; 15th October; Aid Es Seghir.

POLICE: Tel. 21-700.

SHORE LEAVE: Allowed.

SHIPMASTERS REPORT: 1976.

Documents:

1 General Declaration.
2 Stores Lists.
3 Crew Lists.
1 List of Dangerous Cargo.
1 Health Declaration.

Pilotage: To be contacted on VHF Channel 16, between 0600–1000 hrs. local time and between 1600–2000 hrs. local time. Also Harbour Master may be contacted at the same hours on Channel 16. At other times the same Authorities may be contacted by radio 2182 kc/s.

My vessel had a draft of 26 ft. By the VHF the Harbour Master ordered me to enter the channel and continue up to the Outer Basin where a Pilot would embark on the Port side.

It was later confirmed both by the Pilot and Agent to be usual for ships up to 10,000 tons to enter the outer Basin without Pilot. Also upon our departure, the Pilot disembarked at the outer harbour Basin.

The Agent told me the channel was 34 ft. deep. Although no measurements have been taken for 10 years. Lately a ship with draft of 33 ft. has passed through the channel without any difficulties.

An unmarked wreck is situated in position 34° 37.5′ N., 10° 49.5′ E. The best way to approach the outer channel from S.W. or South, would therefore be to navigate to a position 6.5 miles S.E. of Tina's Lt. Tr., then change course for the outer buoys of channel.

The only Beacons illuminated around Kerkenah Banks were Beacon No. "1" and No. "8". All other buoys were in correct position, but extinguished.

Stevedores: Work in shifts from 0700 hrs. till 1300 hrs. and from 1400 hrs. till 2000 hrs. In case of sailing it is possible to arrange overtime up to 2100 hrs. It is also possible to have night gangs from 2100 hrs. till 0300 hrs.

AUTHORITY: Direction du Port de Sfax.

Rom.

SOUSSE (Suza): 35.50 N. 10.38 E.

DOCUMENTS:

3 Crew Lists.
3 Passenger Lists.
4 Crew Personal Effects Lists.
Health Declaration.
Manifest of Provisions on Board.
2 copies vessel's particular declaration.

PILOTAGE: Contact Pilot Station on VHF Channel 16 or Tel. 03.20.401.
RESTRICTIONS: Entrance to the port coming from the sea is East to West. Channel 820 m. long, dredged to 10 m. Depth in port area 7.80 m., height of tide 0.40 m.
MAX. SIZE: Max. LOA. 170 m.
HEALTH: Free pratique normally given at the quays after mooring. Pratique is automatic for vessels coming from another Tunisian port. In case of suspected disease on board vessel will be ordered to quarantine anchorage.
RADIO: Sousse Control "3VW4" 2182 kHz.
BERTHING: One basin for ocean-going ships, yacht basin and fishing vessel harbour.

Length of quays 830 m. 8 berths. Also see "Developments".
STEVEDORES: Minimum of 24 hours advance notice of ETA to Agent is required.
MEDICAL: Doctor available to board vessel. Hospital, private clinics and all facilities available.
REPAIRS: No facilities.
GANGWAY/DECK WATCHMEN: It is recommended to employ shore watchmen.
OPENING/CLOSING HATCHES: Carried out by stevedores at the request of Masters.
CUSTOMS ALLOWANCE: Each crew member is allowed one carton of cigarettes and one opened bottle of wine or spirits. In case of a prolonged stay in port, Customs may renew these quantities.
IDENTIFICATION CARDS: Crew member's identification cards will be collected by the Immigration service and exchanged for shore passes while vessel is in port.
TIME: GMT plus 1 hour all year round.
HOLIDAYS: There are 17 days official holiday during the year. Work can be carried out on all holidays except 1st May on payment of 100% overtime.
DEVELOPMENTS: In August 1979 the following will be available:—

South Basin Quay, length 140 m., dredged to 9.5 m. The channel will be dredged to 10.5 m.

A tug of 1,200 h.p., 1 crane 18 tons and 2 cranes 10 tons will be available.
AIRPORT: Skanes Monastir – 13 km. from the port.
AUTHORITY: Direction du Port.

NOTES

Please also advise Shipping Guides Ltd.

Turkey

GENERAL:

On arrival off Canakkale, coming from the Aegean, or off Buyukdere, coming from the Black Sea, ships must stop for sanitary inspection. However, tankers with a d.w.t. over 100,000 tons proceeding to the Gulf of Izmit to discharge or load petroleum products may obtain pratique there without stopping at Canakkale, provided Agents are notified 96 hours in advance.

In the event of bad weather at Canak, vessels may be allowed to continue their voyage to Istanbul and undergo the sanitary inspection there. Permission to do so is notified to them by the Canak Sanitary Office with the signal "H.M." in daytime and three vertical lights (green, white, green) at night.

Pilotage through the Dardanelles and the Bosphorus is not compulsory. Pilot stations, equipped with VHF operating on Channel 16, are located at Canakkale, Istanbul and Telli Tabia (Upper Bosphorus).

Turkish Flag: All foreign ships are required to fly Turkish flag during their stay in Turkish ports or when passing through the Straits (Dardanelles and Bosphorus).

Sanitary and Port Inspections: On arrival at a Turkish port, every ship is boarded by a Sanitary Officer for examination. Nobody may join or leave the ship before this inspection is completed.

The ship must produce the following documents:

Sanitary Declaration Form.
Deratisation Certificate.
Ship's Register.
Load-line Certificate.
Safety Radio Certificate.
Safety Equipment Certificate.
Cargo Ship Safety Construction Certificate.

Police Customs Controls: After obtaining free sanitary pratique, the ship must likewise produce:

(1) 3 Crew Lists together with every member's passport, discharge book or Z-card.
(2) 1 List of Provisions, Stores and Bunkers.
(3) 1 Declaration of all Monies or cheques carried in the ship's safe.
(4) Manifests of all cargo on board, whether for discharge at Turkish or foreign ports.
(5) 1 List of Passengers landing in Istanbul showing nationality, number, date and source of entrance visa (if such visa is required) together with the passports.
(6) 1 List of Transit Passengers together with the passports.

Documents covered by items 1, 2, 3, 4 and 6 as well as a list of passengers embarking at Istanbul are also required on departure.

Police and Customs Controls are effected at Istanbul when arriving from the Aegean and at Buyukdere when arriving from the Black Sea. However, vessels under 500 n.r.t. have to undergo control formalities at Canakkale, both inwards and outwards, apart from those to be effected at Istanbul. It is recommended to prepare the accommodation ladder to facilitate the boarding of officials.

Excepting the case of tourist vessels, the Customs Officers will seal stocks of provisions and tobacco, spirits, as well as any other items in bond. Sufficient quantities of the foregoing will be left unsealed for the needs of the ship during the stay in port.

If stores left unsealed are exhausted while a ship is in port, a request to the Customs Officers will ensure further withdrawal.

The seals must not be broken before the ship's exit from territorial waters or if sailing from one Turkish port to another Turkish port.

Special Rules for the Passage of the Bosphorus: Art. 35 of the "International Regulations for Preventing Collisions at Sea" does not apply to ships navigating in the Bosphorus. Ships proceeding up the Bosphorus must keep to the European side, and coming down must keep to the Asiatic side of the mid-stream; that is to say they must always keep to the left in so far as is consistent with safety.

During their passage through the Bosphorus, ships must regulate their speed, without exceeding the 10-knot limit over the bottom, so that piers, landing stages, etc., or other craft (sailing and rowing boats, etc.) may not be damaged by their wash. Further, they must take care not to hinder fishing and diving operations or to damage submarine telephone, telegraph or electric cables.

Sound Signals, Wireless Sets: It is forbidden to make use of sirens or steam whistles in the harbour, except for manoeuvring purposes as laid down in the regulations for the avoidance of collisions.

Wireless transmitters are not sealed on arrival of a vessel but it is recommended that their use in Turkish territorial waters be restricted to cases of emergency.

Refuse: No refuse such as garbage, ashes, polluted oil and the like can be thrown or pumped overboard, nor any scraping, cleaning of tanks and/or bilges can be effected inside port limits.

SHIPMASTER'S REPORT: For outward clearance through the Dardanelles vessel has to produce: 1 Crew List, 1 Stores List, 1 Manifest and Customs Clearance.

SHIPMASTER'S REPORT: 1978

Procedures for entering Dardanelles: Send ETA to Agent at Istanbul and pilot station Mehmetoik 24 hours in advance or if sailing from Piraeus via Agent at Piraeus stating ETA Mehmetoik Bornu for Dardanelles and Bosphorus Pilot.

Approaching Dardanelles all communication with pilot station was on VHF Channel 14. Keep to South side (Kum Kale Bornu). Pilot ladder starboard side 3 ft. from the water.

When Pilot boards and vessel proceeds to Canakkale where Catering Officer boards the health launch via the accommodation ladder.

Requirements: Nett Tonnage; Gross tonnage; Last Port; Next Port; Cargo; Amount and type; One crew list with vaccination dates; Derat certificate to be sighted; Ship's register sighted.

Other information: In consultation with Pilot; ETA Istanbul; ETA Buyukdere.

Pilot disembarks at Kavak Bornu but slows passing Buyukdere where sub-agents launch comes alongside and passes aboard a small information sheet which requires ETA next port. It is 3.5 miles from where Pilot disembarks to the entrance to the Black Sea and extreme care has to be taken due to the multitude of fishing vessels which are working across the entrance to the Bosphorus in a zone clearly marked on the chart 6 miles by 4 miles which the caption reads "No fishing allowed". Due to other vessels disembarking Pilots, and also having to negotiate path through the itinerant fishing boats one is strongly advised to proceed at slow speed until approximately 2 miles clear on the mouth of the Bosphorus.

In the Dardanelles starboard hand rule applies but in the Bosphorus a local left hand rule applies. This is in order to aid the South bound traffic to have the benefit of the continuous South bound current which runs 1.5 to 3 knots depending on the time of the year.

The passage through the Dardanelles was approximately 3 hours and the passage through the Bosphorus was 2 hours. The same Pilot makes the complete transit, spoke good English and was very competent. Engines were on standby for the whole transit which was approximately 13 hours and for a period through the Sea of Marmara for 5 hours we were on full speed with 1 hour's notice. The narrows at Canakkale and passing Istanbul are two points which have to be navigated with extreme caution due to ships passing on bends and crossing ferries. The entrances at each end are also congested points and have to be navigated with caution.

It states in the Pilot Book (Volume 24 – The Black Sea Pilot) that Pilotage is not compulsory in the Dardanelles or the Bosphorus. This is a misnomer and in my opinion should be totally disregarded for practical purposes. Nowhere in the Pilot Book does it mention the fact that vessels taking a Pilot off Memetcik Bornu should keep to the South side of the entrance. This is important as the outgoing traffic which is mainly Russian have no Pilots and keep to the Northern side of the Dardanelles which is on their starboard hand. The Pilot informed me that they accept the fact that their pilot station is situated on the wrong side of the channel for inward bound vessels and their launch will make its way across to the South side where inside of Kum Bernu there is room to wait if a vessel finds no Pilot immediately available (not to anchor). Pilot station will give instructions on the approach of a vessel. Vessels proceeding South disembark their Pilots off Mehmetoik Pilot station which presents no problem as it is on the starboard side of the channel.

ALIAGA: 38.50 N. 26.57 E. (See Plan Book)

Aliaga Refinery Terminal.

LOCATION: *Northern Point:* Lat. 38° 50′ N. Long. 26° 57′ 36″ E.
Southern Point: Lat. 38° 50′ 10″ N. Long. 26° 46′ 33″ E.

DOCUMENTS: See "Izmir".

PILOTAGE: Pilot boards 2 to 3 miles West of Tasli Burnu Light.

ANCHORAGE: The port itself is situated about 40 miles N.N.W. of Izmir on the Southern arm of the Gulf of Candarli and the anchorage is considered safe for large ships.

RESTRICTIONS: Water depth at entrance about 14 fathoms. Water depth at crude oil wharf 17-18 m.

MAX. SIZE: Crude oil berth designed for up to 100,000 d.w.t. Products berth designed for up to 40,000 d.w.t.

HEALTH: *Customs:* Customs post at refinery.

Immigration: None locally. Incoming and outgoing personnel have to be processed at Izmir and escorted under guard to and fro.

Health: No office locally. Officials have to be brought from Izmir.

RADIO: Cable address of Aliaga Refinery: "Petrol Izmir".

Four days prior arrival, Agents require notice of ETA (time and date) followed by any subsequent change.

TUGS: Two 2,400 h.p. tugs are on order. Meanwhile tug can be obtained, if free, from Port Monopoly Izmir at additional cost. Mooring boat also on order, meanwhile local boat available for hire.

BERTHING: Incoming tankers discharge at a "T" type oil jetty just South of Tasli Burnu Light. The jetty runs parallel to the coastline and is situated 39° 49′ 30″ N. 26° 57′ 30″ E. approximately. The outer arm of the jetty, 317 m. long, is designed for crude oil tankers of 75/100,000 d.w.t. on the outer side and for tankers of 25,000 d.w.t. on the inner. The outer S.E. arm is designed for products tankers of up to 22,000 d.w.t. and the inner berth for small tankers of up to 5,000 d.w.t.

The crude oil berth is roughly in the centre of the N.W. arm and has 4 loading arms. The jetty is protected by 4 pivotal concrete buffers.

The products berth is similarly in the centre of the arm and is equipped with flexible hoses. Crude oil pumping rate up to about 3,000 t.p.h.

FRESH WATER: Available.

FUEL: Available.

AIRPORT: Izmir is not an international airport and cargo is nearly always transhipped leading to unforeseen delays.
SUPPLIES: From local towns; adequate fresh fruit and vegetables and meat.
AUTHORITY: See "Izmir".

AGENT: See "Izmir".

BANDIRMA: 40.22 N., 27.59 E.

Port under construction.
BREAKWATERS: North Breakwater length 995 m. and West Breakwater length 250 m.
TUGS: 1 tug 970 h.p. and 1 tug 250 h.p. 2 mooring boats also available.
BERTHING: At present there are 3 positions alongside at which vessels may berth. Lengths 280 m., 190 m. and 100 m. Depth alongside varies from 8.30 m. to 10.0 m.

Cargo operations are affected by ships own gear.

Loading/discharging capacity per hold in 8 hours is of 100/150 tons for bulk, 70/100 tons for bale and 40/60 tons for mixed cargo.
FRESH WATER: Available. Rate 25 t.p.h.
DEVELOPMENTS: Upon completion there will be 2 mooring places: 1 of 10 m. depth, 1,866 m. length and another of 12 m. depth, 250 m. length. Later a number of cranes of 5 tons, 1 of 25 tons and 1 of 50 tons will be installed.
AGENT: See Istanbul.

CANAKKALE: 40.08 N. 26.24 E.

DOCUMENTS: Vessels in transit through the Dardanelles must stop at Canakkale and produce following documents to boarding Officer.

Certificate of Registry.
Deratisation Certificate.
Crew List.
Name of Agent in Istanbul.

Vessels proceeding to a Turkish port will require in addition:
4 Crew Lists.
2 Personal Effects Lists.
2 Currency Lists.
2 Stores Lists.

PILOTAGE: Not compulsory for vessels proceeding to Istanbul. Compulsory for vessels over 1,500 g.r.t. proceeding to Canakkale. Vessels requiring a Pilot use International Code signals, or signal "G" by light or whistle. No advance notice required. Telegraphic address of pilot station, Kilavuzluk Canakkale, via radio station TAM 7. Pilot boards off Khepez lighthouse, where vessel should slow down but no need to anchor. In bad weather pilot boat will anchor in Gulf of Kilya.

Also see "Shipmaster's Report".
ANCHORAGE: Vessels may anchor in position 40° 09′ 00″ N., 26° 23′ 09″ E. in depths of 12 to 16 fathoms.
MAX. SIZE: Vessels of any size may navigate Canakkale Strait.
HEALTH: All vessels bound for a Turkish port must stop for Sanitary Clearance at Canakkale. Any suspected disease on board must be declared. Sick crew members may be landed for hospitalisation.

Also see "Shipmaster's Report".
RADIO: Radio station TAM 7 situated at local Post Office.
TUGS: One tug available, belonging to pilot station. Ship's tow lines always used.
BERTHING: Agents require at least 24 hours notice to arrange berthing at Canakkale Pier. Vessel may be required to shift anchorage to give place to Turkish passenger vessels which have priority.
STEVEDORES: Arranged by Agent on basis of Master's ETA.
MEDICAL: 12 hours notice required to arrange medical assistance. Hospital facilities available.
DENSITY: Salt water. No tide.
FRESH WATER: Only available from the pier, rate approx. 10 t.p.h.
FUEL: Marine grades not available.
DEVELOPMENTS: New installations and berths under construction.
GANGWAY/DECK WATCHMEN: Customs guard compulsory for vessels at the pier.
OPENING/CLOSING HATCHES: May be operated by crew or stevedores according to Charter Party.
CUSTOMS ALLOWANCE: Crew allowed to retain only quantities for personal consumption.
IDENTIFICATION CARDS: Required for crew members going ashore.
CONSULS: Italy, tel. 1008.
REPAIRS: Minor repairs can be effected.
REPATRIATION: Can be arranged if visa requirements are satisfactory.
AIRPORT: Situated 2 km. from Canakkale, internal services only.
TIME: GMT plus 2 hours, Summertime GMT plus 3 hours.
HOLIDAYS: Cargo work can be arranged on all holidays by agreement.
POLICE/FIRE/AMBULANCE: Police Tel. 1181; Fire 00; Ambulance 1098.
SHORE LEAVE: Allowed at all times.
SHIPMASTER'S REPORT: *Dardanelles and Bosphorus:* A pilot station has been established at Mehmetcik Point (Cape Helles); if the weather is too bad to embark the Pilot here, vessels should proceed to Canakkale. If a Pilot is required for both Dardanelles and Bosphorus, give 24 hours' notice through Istanbul Agent. Same Pilot remains on board for full transit, Sea of Marmara included, and this applies for both North and South-bound traffic. Pilots at Dardanelles and Bosphorus work VHF Channel 16.

Sanitary Control: White launch. Officers do not board but require Chief or 2nd Officer to go down into boat. Canakkale required Ship's register, Derat, Crew List and Quarantine Declaration of Health. It is also required to fill in a form giving details of ship, cargo, last port, number of crew and passengers, etc., also name of ship's Agent in Turkey.
AUTHORITY: Canakkale Liman Baskanligi.

AGENT: See "Istanbul".

DERINCE: 40.45 N. 29.49 E.

PILOTAGE: Pilotage in the Gulf of Izmit is compulsory for foreign flag vessels. The Izmit Gulf Pilot will disembark at harbour limits. Harbour Pilot also compulsory for all foreign flag vessels.
ANCHORAGE: Suitable anchorage at harbour entrance.
TUGS: Two tugs are available, 970 h.p. each.
BERTHING: Pier length 207 m., depths alongside vary from 5 m. up to 7.35 m.
BULK HANDLING FACILITIES: Two silos with storage capacity 5,000 tons each. Loading capacity 160 t.p.h., discharging capacity 120 t.p.h.
SHIPMASTER'S REPORT: Fresh water available in small quantities from fire engines but expensive.
AUTHORITY: General Directorate of Turkish State Railways.
AGENT: See "Istanbul".

EREGLI (Karadeniz Eregli), including Usunkum: 41.18 N. 31.27 E. (See Plan Book)

DOCUMENTS:
5 Crew Lists.
5 Passenger Lists.
3 Provisions Lists, including Bonded Stores.
3 Cargo Manifests.
3 sets Bills of Lading.

PILOTAGE: Pilotage available night and day for use in port under all weather conditions. Pilotage is carried out by qualified and experienced Pilots.

Compulsory for ships over 500 tons to have pilot service, and for ships over 1,000 gross tons to have pilot and tug-boat service.

Ships will take Pilots on board at a reasonable distance off the breakwater's red light. It is strongly advised that ships awaiting Pilot should avoid drifting South of the transit line of the green light on the breakwater ruin (Boshane Mendiregi) and the Citadel ruin which can be seen on top of the hill. (Transit direction is approximately 041° true.) The distance from the entrance of the port to the dock is approximately 4.6 cables, and the depth gradually decreases from 10 fathoms to 5 fathoms at the dock side.

In stormy weather, if the Pilots are unable to board, ships will proceed to a point in the Inner Port enabling the Pilots to board.
ANCHORAGE: Vessel waiting Pilot may anchor about 1 mile West of breakwater red light. The bottom of the port is muddy and sandy, and therefore ships can lay at anchor in any weather without fear of drifting.
RESTRICTIONS: *Eregli:* The depth of water in Outer Harbour is 15 m. (49.2 ft.) and Inner Harbour has 10 m. (35 ft.)

Usunkum: The length of Usunkum breakwater is 1,250 m. The depth of water is 42 ft. Under normal weather conditions ships up to 34 ft. (inclusive) can enter into the Inner Harbour and berth alongside the dock safely. Average tide is about 1 ft. The width of channel is 200 m. but safe lane is 144 m. wide.
MAX. SIZE: *Eregli:* Under normal weather conditions ships up to 35 ft. draft can enter Inner Harbour and dock safely.

Usunkum: Up to 34 ft. draft can be berthed.
Also see "Developments".
HEALTH: Pratique given after port doctor's visit on vessel's arrival. Crew vaccination certificates should be presented if required. Sanitary certificate required for any live animals on board.
RADIO: Istanbul Radio, TAH.
TUGS: Available. Normally join vessel outside the breakwater. Ships lines always used. Towing is done by one or two 600 h.p. diesel tugs. Towage is required for entering, leaving, berthing and shifting according to the size of the ship. Ships having a draft of over 20 ft. shall not use their own propellers in the Inner Harbour except in case of danger or absolute necessity.

Vessels with a draft greater than 30 ft. may be asked by the Port Authority to use a second tug at a very high cost.
BERTHING: *Eregli:* Inner quay is about 400 m. long for general cargo and 135 m. for coal loading.

The normal depth alongside quay is 30 ft. The docks have loading and unloading facilities, a railway track and open and closed warehouses at a very short distance. The railroad is a local system and is not connected to the Turkish railroad network. It has a length of approximately 16 km. for coal mine operations.

Buoys: There are four mooring buoys in the port 105 m. apart and at a distance of 170 m. from the breakwater at an average depth of 8 fathoms, buoys anchored with 50 tons concrete blocks and marked I, II, III and IV starting from the main breakwater head.

It is possible and safe to moor to the buoys with or without anchor and to moor to the breakwater by the stern (if the ship's length is adequate).

Usunkum: Usunkum has one loadout dock of about 280 m. length and one ore unloading dock about 220 m. length. Max. size 35,000 d.w.t. Max. draft 35 ft. Max. LOA 665 ft. Discharge rate 600 t.p.h. Coal also discharged, rate 600 t.p.h. also one small general-purpose quay for small ships.
See "Developments".

STEVEDORES: At least 24 hours notice required to order gangs.

MEDICAL: All details of any medical assistance required to be given to Agent with one hours notice. Hospital facilities available. Vaccinations can be arranged.

FRESH WATER: Can be delivered at 40 t.p.h.

REPAIRS: Small repairs such as lathing, levelling, welding, blacksmith work and woodwork can be effected ashore.

OPENING/CLOSING HATCHES: By either stevedores or crew according to Charter Party.

CUSTOMS ALLOWANCE: 200 grams tobacco and two bottles wine/spirits allowed each man per week.

IDENTIFICATION CARDS: Needed for crew going ashore.

CONSULS: No local representatives.

REPATRIATION: No facilities exist.

TIME: GMT plus 2 hours, Summertime GMT plus 3 hours.

HOLIDAYS: Cargo work can be arranged on all holidays.

POLICE/FIRE/AMBULANCE: Police tel. 28; Fire tel. 00; Ambulance tel. 500.

TELEPHONES: Cannot be connected on board.

SHORE LEAVE: Crew permitted to go ashore at all times.

DEVELOPMENTS: The channel at Usunkum is being dredged to 14 m. and the inner harbour to 13 m. It will be possible to berth vessels up to 60,000 d.w.t. in the near future.

AUTHORITY: Karadeniz Eregli Liman Baskanligi.

GIRESUN (Kerasunda): 40.56 N. 38.24 E. (See Plan Book)

PORT LIMITS: The Port of Giresun is the sea area contained in the inner part of the imaginary lines which joins 40° 56′ 40″ N., 38° 19′ 40″ E. and 40° 54′ 51″ N., 38° 26′ 10″ E., Aksu River mouth and the point 2,778 m. (1.5 miles) away from this mouth in an 019° true direction with the 40° 56′ 15″ N., 38° 27′ 00″ E. and 40° 55′ 10″ N., 38° 19′ 40″ E. Gure River mouth and the point 2,778 m. (1.5 miles) away in the true North direction.

PILOTAGE: Pilot ordered by Agent who requires 24 hours notice in advance of vessel's arrival. Compulsory for all foreign flag vessels.

Pilot service operates 24 hours a day and vessels may enter and leave at any hour on request.

ANCHORAGE: Good anchorage in Outer Harbour. Vessels should keep the entrance channel clear.

TUGS: Compulsory for all foreign flag vessels.

BERTHING: The port of Giresun is composed of 2 parts. These are the inner harbour and the outer harbour.

(a) The inner harbour is the sea area contained in the inner side of the line which joins the light at the end of the main breakwater with the light at the end of the auxiliary breakwater.

(b) The outer harbour is that part of the sea which remains between the port boundary and the inner harbour boundary.

The Inner Harbour

The berthing, tying-up and stern to shore anchoring places for the ships are given below:

A – The passenger quay is reserved for the berthing of passenger ships but when there are no passenger ships, cargo ships may berth here providing the Harbour Authority's permission is obtained. This quay is 150 m. long and the water depth is 8 m.

B – The cargo wharf: This is reserved for cargo ships. It is 250 m. long and the water depth is 7 m.

C – The small craft quay is 135 m. long and the water depth is 3 m. Small tonnage ships are berthed here.

D – Service wharf: This is 88 m. long and the depth of the water is 4 m. The service craft of the harbour authority berth here.

E – Providing that they obtain the Harbour Authority's permission, ships waiting their turn to berth may tie-up stern to shore, at the bollards on the main breakwater in such a way as not to impede the traffic.

F – The outer harbour is an unrestricted anchoring area but it is strictly forbidden to anchor or wait at the mouth of the breakwater. Anchoring is unrestricted 315° true North of and 2.5 cables away from the centre of the main breakwater North of the normal anchoring area.

STEVEDORES: Working hours normally 0800 to 1200 and from 1300 to 1700. Four gangs available.

FRESH WATER: Available.

FUEL: Not available.

REPAIRS: No repair facilities.

DEVELOPMENTS: During 1978 mobile cranes will be installed.

AUTHORITY: Giresun Port Authority.

GOLLUK: 37.14 N.27.38 E.

DOCUMENTS: The following documents have to be prepared by Masters before arrival:

4 copies of Crew Lists.
2 copies of Store Lists.
1 copy Health Document.
4 copies of Passenger Lists.
3 copies of Customs Documents.
3 copies of Manifests for cargo destined to port.
1 copy of Manifest for all transit cargo aboard.

N.B. Ship's particulars Form is to be filled by Masters upon arrival and remitted to the Port Authorities.

RESTRICTIONS: Golluk is a well-protected natural harbour, not affected by winds from any direction. Deep water approaches to pier.

PILOTAGE: Pilot unavailable.

HEALTH: Vessels to show their Sanitary Certificate if available aboard and also their Registry. Presentation also of Vaccination Certificate of all the crew, if required by sanitary officials. Pratique is necessary on arrival even if vessel has called at another port in the same country. Sanitary Certificate is required for live animals aboard.

RADIO: Izmir radio station, call letters TAN2. Istanbul radio station, call letters TAH.

TUGS: Not available.

BERTHING: One pier 170 m. long used for handling emery ore in bulk. Depths alongside 39 ft. shelving to 20 ft. at 90 m. from seaward end.

CUSTOMS ALLOWANCE: 50 cigarettes for each member of crew going ashore. Aboard the vessel each member of the crew is permitted to have one carton out of Bond. One litre wine/spirits for each member of the crew in opened bottle is permitted out of Bond. However, this allowance is to be kept aboard the vessel.

TIME: Local time GMT plus 2 hours, Summertime GMT plus 3 hours.

HOLIDAYS: New Year's Day (from December 31st 1200 hrs. to January 1st 2400 hours); National Sovereignty Day (from April 22nd 1200 hrs. to April 23rd 2400 hours); Spring Day (1st May), Constitution Day (27th May); Sports Day (19th May); Victory Day (30th August); National Holiday (28th October 1200 hrs to 30th October 2400 hrs); Sheker Bayram (3 days movable); Kurban Bayram (4 days, movable).

GOLOVASI, Botas (Ceyhan) Terminal: 36.53 N.35.56 E. (See Plan Book)

PORT LIMITS: The Botas (Ceyhan) Harbour is operated under the Authority of Iskenderun Harbour Master's Office and the harbour area is bounded by the following points:

(a) Point (A) on the shore, Latitude 36° 52′ 12″ N. and Longitude 35° 55′ 07″ E., to point (B) on the sea Latitude 36° 49′ 30″ N. and Longitude 35° 56′ 40″ E.;

(b) and from point (B) to point (C) Latitude 36° 50′ 30″ N. and Longitude 35° 59′ 30″ E.;

(c) and from point (C) to point (D) on the shore Latitude 36° 53′ 25″ N. and Longitude 35° 56′ 41″ E.;

(d) and the shore line between points (A) and (B).

DOCUMENTS:

Sanitary declaration form
Exemption certificate
Ship's register
Load line certificate
Ship safety construction certificate
Safety radio certificate
Safety equipment certificate
Personnel list
Provision, store and bunker lists
Monies or cheques declaration list

PILOTAGE: Pilotage is compulsory for mooring and unmooring. Pilot will meet the ship 1 mile South of the pier in the anchorage zone.

It is requested that pilot ladder be of an approved pattern and securely rigged.

ANCHORAGE: In the event of berth not being available on arrival, vessel must anchor in the anchorage zone (To the S.S.E. of the berth beyond the prohibited area). Terminal Shore Control will keep vessel advised of expected time of berthing etc., by means of VHF on Channel 16.

Prohibited Anchorage: Vessels on arrival shall not anchor within a radius of 1 mile from the light at the end of the jetty.

RESTRICTIONS: Berthing and unberthing possible at any time day or night, weather conditions permitting.

MAX SIZE: 300,000 d.w.t. at outer berths and 150,000 d.w.t. at inner berths.

RADIO: It is essential that tankers bound for the Botas terminal, communicate with their Agent with at least 72 hrs., 48 hrs. and 24 hrs. before arrival and state ETA, cargo required, maximum loading rate, S.W.L. of derrick, manifolds measurements and quantity of ballast on board. Vessel should request Agent to forward the information to BOTAS.

VHF: Botas Terminal Shore Control on VHF Channel 16.

Arriving vessels should make contact at least 4 hours before arrival at the anchorage in order to avoid delays.

TUGS: There are 4 tugs available to assist in berthing and unberthing. Three are 2,600 h.p. each and the other 1200 h.p. The tugs are all provided with fire fighting equipment.

BERTHING: Four loading berths available:

Berth No.	Max. size	Depth Alongside
1 (Outer East)	300,000 d.w.t.	72 ft. – 98 ft.
2 (Outer West)	300,000 d.w.t.	72 ft. – 98 ft.
3 (Inner East)	150,000 d.w.t.	66 ft. – 72 ft.
4 (Inner West)	150,000 d.w.t.	66 ft. – 72 ft

LOADING:

Berth No.	Max. Ldg. Rate cu.m.p.h	Loading Arms	Ballast Arms
1	15,000	4×20 in.	20 in
2	15,000	4×20 in.	20 in.
3	7,500	4×16 in.	16 in.
4	7,500	4×16 in.	16 in.

Maximum loading rates are dependent upon availability of loading lines on the ship

Terminal Port Operator is adviser for all mooring, unmooring operations and communications with shore etc.

Derricks and Cranes: Derricks and cranes S.W.L. of (5) tons is recommended.

Loading operations and shore communication: Ship's tanks are inspected by an authorised inspector from Terminal and passed as suitable for loading.

Responsible ship's officer must certify to the Berth Operator that all ship's valves are closed or blanked except those required for loading and water circulation purposes, and that these Rules and Regulations are being and will be observed.

The Berth Operator will not transmit any loading instructions to the shore until the responsible ship's officer is satisfied that the hoses are connected correctly and that all valves have been set for receiving cargo.

Loading rates requested by the vessel or quoted by the Terminal will be the peak or maximum rate at any time during the loading period.

The Port Operator or Terminal Representative will advise the Master of the ship as to shore communication and any signal needed for local requirements.

Ship's crew with an officer in charge will assist in all operations as advised by the Port Operator or Berth Operator. This includes lifting, connecting, disconnecting, lowering of hoses and tending moorings.

Lighting: Manifold and mooring areas should be adequately lit to enable night mooring and loading operations to be carried out with safety. Sea area around the ship to be illuminated.

Notice of Readiness: Notice of readiness will be received by the Port Operator who is the Botas Representative. Provided the vessel is ready to load, lay time will commence in 6 hours after receipt of Notice of Readiness.

Deck Watch: A responsible ship's officer shall be on watch on board at a point near the ship's tanks which are receiving oil during the process of loading and NOTICE IS HEREBY GIVEN that the Terminal Representative have received instructions to stop loading immediately whenever this rule is disregarded.

Capable members of the ship's crew shall be stationed by the ship's tank valves which are receiving oil during the process of loading.

All pipe-lines and hoses shall, while rigged for loading crude oil be directly and continuously under supervision. No crude oil shall be allowed to escape or overflow.

BALLAST: Vessels should arrive with sufficient ballast for safe handling of vessel under prevailing weather conditions.

Vessels shall not discharge into the waters of the port any part of the content of their cargo, sloop, or ballast tanks or bilges which is liable to pollute these waters.

Ballast water must be declared and signed by the Master and delivered to the Terminal to this effect. Vessel's scuppers must be effectively plugged and leakage or spillage of oil aboard ship must not be swept or washed overboard.

It is an offence to discharge dirty ballast or pump out bilges.

MEDICAL: Master to inform Agent by cable if urgent medical assistance is required upon arrival, also indicating, if possible, seriousness of case in order that adequate steps may be taken. Hospital and doctor are available at Ceyhan 25 kms., Adana 75 kms., and Iskenderun 65 kms., distance from Botas (Ceyhan) Terminal

DENSITY (Salinity): About 39 p.p.m.

FRESH WATER: Available at jetty. Rate 25 t.p.h. Arrangements to be made through Agent.

FUEL: Not available (may be available in 1979).

CONSULS: There are no Consuls at the port.

REPAIRS Not possible.

SURVEYORS: There are no classification societies at the port.

GANGWAY/DECK WATCHMEN: There is no watchmen service.

CUSTOMS ALLOWANCES: 40 cigarettes for each crew member going ashore. On board the vessel each crew member may hold 200 cigarettes and 1 open bottle wine/spirits out of bond.

AIRPORT: Adana Airport, served only by domestic lines with routes to Istanbul and Ankara. Airport is situated 75 kms, from Botas (Ceyhan) Terminal. Twice daily service to international airport Istanbul.

TIME: GMT plus 3 hours in Summer time, GMT plus 2 hours in Winter time.

HOLIDAYS: New Year's Day (from December 31st, 1200 hrs., to January 1st, 2400 hrs.), National Sovereignty Day (from April 22nd, 1200 hrs. to April 23rd, 2400 hrs.), Spring Day (May 1st), Constitution Day (May 27th), Sports Day (May 19th), Victory Day (August 30th), National Holiday from October 28th to October 30th, 2400 hrs.), Shakear Bairam (3 days moveable), Kurban Bairam (4 days moveable).

POLICE/AMBULANCE/FIRE: All information given after berthing.

TELEPHONES: Cannot be connected on board.

SERVICES: There are no special services.

SHORE LEAVE: Crew permitted to go ashore.

INDENTIFICATION CARDS: Seamen's book is sufficient.

REGULATIONS: In addition to Harbour Regulations all ship Masters are at all times responsible for the application of all safety precautions as prescribed in the international oil tanker and terminal safety guide.

SHIPMASTER'S REPORT: November 1978.

Documents: Turkish health form (supplied when vessel boarded), 2 stores lists, 2 crew declarations, 8 crew lists.

Pilotage: Compulsory. Pilot meets ship 1 mile South of the pier at the anchorage zone.

Anchorages: At least 1 mile South of Southern end of jetty.

Restrictions: Max. drafts 72 to 98 ft. at berths 1 and 2 and 66 to 72 ft. at berths 3 and 4.

Max. Size: 300,000 d.w.t.

Health: Free pratique granted at anchorage or when berthed.

Radio: Via Mersin.

VHF: Communicate with Botas Terminal Channel 16 at least 4 hours before arrival. Uses Channel 22 for talking.

Radar: None.

Tugs: 3 of 2,600 h.p. and 1 of 1,200 h.p. All provided with fire fighting equipment.

Berthing: Normally facing Southwards (bow to sea) for emergency purposes.

Cranes: 1 on each berth.

Medical: A doctor is available ashore but vaccinations not possible.

Density: 1025.

Fresh Water: Available at all berths, arranged through Agent.

Fuel: Not available.

Fire Precautions: I.O.T.T.S.G. safety check list is utilised.

Consuls: See "Iskenderun".

Repairs: Repairs to engines alongside may be permitted with written permission from Terminal Management.

Dry Docks: None.

Surveyors: None.

Gangway/Deck Watchmen: Not required.

Customs Allowances: 200 cigarettes and 1 bottle per man.

Repatriation: Possible via Iskenderun and Istanbul.

Time: GMT plus 3 hours in November 1978.

Services: Limited fresh stores available.

Shore Leave: Permitted.

Identification Cards: Shore passes issued.

Mail: To U.K. takes about 5 days. None received due late orders.

General: No large scale B.A. chart available but B.A. 2632 is adequate if radar working. A Turkish Chart No. 334 is available. The position we anchored (2.1 miles South of jetty in 35 m.) was thick mud on bottom and good holding ground with wind from North about force 7. At present berthing only during daylight but sailing any time. Each berth is equipped with shore gangway. Dirty ballast can be accepted up to 40,000 tonnes and clean up to 60,000 tonnes at a rate of 4,500 t.p.h. Loading rates up to 20,000 cu.m.p.h. on berths 1 and 2 and up to 10,000 cu.m.p.h. on berths 3 and 4. S.G. about 0.8459 (API 35.78) at 60/60F. with a loading temperature (November) of about 80°F. The oil is Kirkuk blend crude from Iraq. There are facilities for storing about 1,000,000 tonnes. Berths 1 and 2 manifold 6×20 in. with reducers to 16, 18 or 20 in. if required. Berths 3 and 4 manifold sizes 16 in. with reducers to 12, 14 or 16 in. if required. Automatic couplings may be used. At berths 3 and 4, 4 hoses can be connected if distance between ship's manifold centres is more than 150 cm. There is a Doppler approach system on jetties but it has not been calibrated. All moorings on quick release hooks and usually 3 head, 2 breast and 2 back spring moorings for 140,000 d.w.t. tankers, same aft. For berthing 2 tugs make fast with their own lines, 1 tug at each end of main deck and 3rd tug stands by. For unberthing 1 tug makes fast to bow and stern with ship's rope (not wires) and 3rd tug stands by. Pilot will not use pilot hoist but requires accommodation ladder when in ballast and disembarks with pilot ladder. 7 Notices of Readiness and dry certificate required by Pilot, 1 of each and 1 ullage report required by Agent. Agent takes ashore certificates of Safety, Construction, Safety Equipment, Safety Radio, Loadline and Class. No early departure procedure available and ship stays on berth up to 2 hours after loading awaiting papers. N.O.R. is made out to I.N.O.C. – Bagdhad – Botas – Ceyhan. Pilot requires separate cabin as he acts as Loading Master, also cabin required for 1 Customs official and possibly Agent. Abnormal ship/shore differences appear to be usual as evidenced by the fact that when you handed them a letter of protest they hand you a reply at the same time.

Authority: Botas District Management.

GENERAL: The main engines of all vessels while at the berth shall be kept ready for immediate use. Deck power (steam) is to be maintained at all times and water pressure shall be maintained on the fire fighting system.

Repairs which may prevent the working of the vessel's main engines may only be undertaken in the Port with the written permission of Botas Representative.

The Master shall at all times retain on board sufficient crew to work the vessel.

No craft, other than one having on board the Pilot or Port Health Officer, may approach any vessel entering the Port and no other person may board until Free Pratique has been granted.

Whistle or siren to be available at all times.

Boarding of Vessel: The control of persons boarding vessel is the ship's responsibility. Boarding should be restricted to Botas employees on duty and to persons authorised by the Port Authorities as advised by vessel's Agent.

Stores/Provisions: It is forbidden for provisions or other items to be received or discharged whilst loading is in progress. Launches, other than the Botas's mooring launch, should not lie alongside the vessel.

Tanker Safety: Masters are at all times responsible for the application of all safety precautions as prescribed in the International Oil Tanker and Terminal Safety Guide.

I.O.T.T.S.G. Safety Check List: The tanker safety check list must be completed after inspection of each item prior to commencement of and during loading. The berth operator is authorised to stop all loading operations should he consider that the safety of lives and property is endangered by the infringement of safety rules.

Signals: The following signals must be shown when vessel is in the Port.

By day: Flag "B" of the International Code of Signals. At night: 1 clear red light visible all around.

Fire Fighting Equipment: Vessels must be adequately manned for fire-fighting and vacating the berth in case of an emergency.

The following fire-fighting precautions must be taken.

(a) Fire hoses must be run out fore and aft or monitors ready for use.

(b) Fire-mains must be under pressure.

(c) 1 dry chemical extinguisher must be stationed on either side of the ship's manifold.

Fire Fighting Equipment on each Loading Berth: Equipment is provided for fire fighting on the platforms or exposure protection for the platforms, and the tankers being loaded as follows;

(a) 2 elevated foam/water monitors are mounted on each access tower on the platform capable of delivering 3,550 i.p.m. (800 g.p.m.) of water or foam solution, and has a throw of 60 m. Each monitor is remote controlled from the control room and has flexibility of full horizontal rotation and vertical reflection.

(b) 2 deck level manual water spray monitors of 450 i.p.m. and 2 foam branch pipes of a capacity of 450 i.p.m. of foam delivery used to extinguish fires on the manifolds.

(c) A number of portable dry chemical and CO_2 extinguishers are located in various locations.

(d) Numerous numbers of foam pourers and water spray facilities located under the deck for water surface foam blanketing and fire smothering.

(e) Water curtain facilities are provided on the loading towers to prevent fire spread to and from the berths.

Action in Case of Emergency: In the event of a fire, oil spillage or other emergency on the vessel.

The Emergency and Fire Signal is:

1 or more blasts of the ship's whistle, each blast of not less than 10 seconds duration supplemented by a continuous sounding of general alarm system.

AUTHORITY: Iskenderun Liman Baskanligi.

AGENT: See "Iskenderun".

ISKENDERUN: 36.35 N. 36.10 E. (See Plan Book)

DOCUMENTS:

5 Crew Lists.

4 Passenger Lists.

2 copies Transit Cargo Manifest.

3 copies Inward Cargo Manifest, of which one must be legalised by Turkish Consulate at loading port. If no consulate existing same to be certified by local Customs Officer or Authorities.

1 set Bills of Lading.

2 copies Cargo Stowage Plans.

Health Documents.

2 Stores Lists.

Ship's Certificates.

PILOTAGE: Compulsory. Ordered by Agent on basis of Master's ETA. International Code signals used to call Pilot who boards at harbour entrance. 2 pilot boats available.

ANCHORAGE: Safe anchorage in open roadstead at 0.5 to 0.75 mile from shore. Vessels over 30,000 tons d.w.t. work cargo at anchorage using ship's gear to lighters and pontoons. Vessels loading/discharging to lighter should anchor as close as possible to harbour entrance but not less than 800 m. from the pier.

MAX. SIZE: At anchorage, no limitations. Alongside pier, length 166 m., draft up to 30 ft. Also see "Tankers".

HEALTH: Pratique obtained on arrival. Master required to show vessel's Health Declaration and Certificate of Registry. Crew vaccination certificates to be produced if required. Sanitary certificate required if live animals on board.

RADIO: Istanbul Radio, call sign TAH. Izmir Radio, call sign TAN2.

TUGS: 4 tugs available of 300, 700, 970, and 1,200 h.p. respectively.

BERTHING: Jetty 509 m. long can accommodate 2 large vessels and several small vessels simultaneously.

Berth No. 1 at jetty head, 48 m. length, 35 ft. depth.

Berth No. 2, South side, 166 m. length, 28–32 ft. depth.

Berths 3 and 4, suitable only for tugs and small vessels.

Berth No. 5, North side, 166 m. length, 29–34 ft. depth.

Due to shelving depths vessels of 20,000 to 30,000 d.w.t. berth partly alongside and lighten cargo then shift once or twice further in.

The T.M.O. have a silo of 20,000 tons capacity which can deliver up to 300 t.p.h. Loading capacity of ore, 200 t.p.h., Unloading capacity for coal, 150 t.p.h.

Inner Port, used only by pontoons, lighters and tugs.

Priority given to Army, food relief and passenger ships.

STEVEDORES: 2 consecutive shifts of 8 hours each day. At anchor, approximately 100 tons can be handled each shift, for general cargo. Baled cargo, 125 tons per shift. Bagged cargo, 150 tons per shift.

Gangs secured by Agent through the Port Monopoly, 24 hours prior arrival.

MEDICAL: Master to inform Agent by cable if urgent medical assistance required on arrival, also indicating, if possible, seriousness of case in order to take adequate steps.

TANKERS: 2 buoy mooring berths operated by Mobil Oil and Petrol Ofisi, suitable for vessels up to 50,000 tons d.w.t.

No slop reception facilities.

FRESH WATER: Supplied only by barge, two available each of 250 tons capacity.

FUEL: Not available.

GANGWAY/DECK WATCHMEN: Services of watchmen recommended. 3 shifts of 8 hours each. Extra tariff for Sundays and holidays.

OPENING/CLOSING HATCHES: May be opened/closed by ship's crew. May be performed by stevedores at tariff rates.

CUSTOMS ALLOWANCE: 50 cigarettes for each man going ashore. On board the vessel each man may hold 200 cigarettes and 1 open bottle wine/spirits out of bond.

IDENTIFICATION CARDS: Seamen's Book is sufficient.

CONSULS: Vice-consulates of Sweden, Norway, Netherlands, France, Greece, Italy and Iran.

REPAIRS: Welding and other minor types of repairs are possible.

REPATRIATION: Can be arranged.

AIRPORT: Adana Airport, served only by domestic lines with routes to Beirut and Istanbul. Airport situated 140 km. from Iskenderun. Twice daily service to international airport Istanbul.

POLICE/AMBULANCE/FIRE: Police 1044; Ambulance 1443; Fire 1000.

TIME: GMT plus 2 hours, Summertime GMT plus 3 hours.

HOLIDAYS: New Year's Day (commencing 1200 hrs. Dec. 31st); National Sovereignty Day (April 23rd, half day April 22nd); Spring Day (May 1st); Constitution Day (May 27th); Sports Day (May 19th); Victory Day (August 30th); October 28th (half day); October 29th and 30th; Sheker Bayram (3 days, movable); Kurban Bayram (4 days, movable).

SHIPMASTER'S REPORT: Customs and health clearance is performed at anchor outside the port. Vessels should anchor about 0.5 miles North of the landing stage in the main part of the town. All officials and Agents arrive by boat and when clearance is given the Pilot comes out. Vessels with cargo for the chemical works at Sariseki (3.5 miles North of the main port) the procedure is the same except that a Pilot is not required.

Customs, Immigration, and Health officials require 4 crew lists on arrival. The Agent will require 2 more crew lists prior to the vessel's departure for clearance with the Harbour Master. On departure the vessel will anchor off again while outward clearance is obtained.

Summer time is in operation all over Turkey from 1st April until 30th September each year.

AUTHORITY: Harbour Master, Iskenderun.

AGENT: Gulf Agency Co. Ltd., POB 277, Iskenderun. Tel. 1277. Telex 68124. Cables: "GACSHIP" Iskenderun.

ISTANBUL: 41.01 N. 28.58 E.

DOCUMENTS: *Operating Vessels*

5 Crew Lists.

6 Passenger Lists.

3 Stores Lists.

1 Transit Cargo Manifest.

2 Inward Freighted Manifests.

2 Inward Non-freighted Manifests.

Copies of relevant Bills of Lading accompanying Inward Manifests, Ship's Certificates (Deratisation, Tonnage, Safety, Safety Radio, Class or Freeboard).

3 ships safe money lists. (if there is no money on board, please issue three lists as follows: *There is no money on board).*

Harbour Masters Sailing Permit (which must be exchanged at each Turkish port and kept on board).

Transitting Vessels

Master to present only Tonnage and Deratisation Certificates during Sanitary Control at both Straits (Canakkale and Buyukdere).

PILOTAGE: For both operating and transitting vessels, Pilot secured by the Agent through the Port Monopoly Administration. Master to wire ETA notices 48 and 24 hours prior to arrival. Pilot boarding vessel with service boat hoisting red and white flag. Pilot boarding vessel off Haydarpasa and Seraglio or off Kavak. Pilotage for entering and berthing in harbour areas is compulsory. Pilotage through Bosphorus is optional. All Pilots can be contacted by VHF Channel 16.

Also see "Shipmaster's Report".

ANCHORAGE: Free and safe anchorage in roads off Marmara coast approach to Istanbul. It is however recommended to anchor as near as possible to the harbour. Anchoring at other anchorage areas is subject to special permission via Harbour Master. Good anchorage off Haydarpasa and off Yenikapi, Ahirkapi for large vessels and for smaller vessels there is a good anchorage between Dolmabahce Palace and Kurucesme.

RESTRICTIONS: Ships carrying hazardous cargoes (inflammable, explosives, corrosives, etc.) are not allowed to enter the harbours. Ships can anchor in roads outside the harbour at any time without Pilot. Ships to operate upon arrival at night can enter the harbours with Pilot and with special permission through the Port Monopoly Administration. 48 hours' notice has to be given to the Harbour Master of Istanbul for vessels calling at Istanbul and/or passing in transit through Bosphorus.

Vessels entering the Black Sea must keep to the European side and those leaving the Black Sea must keep to the Asiatic side of the fairway.

MAX. SIZE: No limitation of draft in open roadstead, at anchor. Max. draft in port alongside quay: 10 m. for dry cargo ships. Tankers up to 48 ft. draft can berth at Haramidere oil port.

HEALTH: Sanitary control of both transitting and operating vessels performed at the Straits entrance (Canakkale and Buyukdere). Ships entering from South must slow down at Canakkale and ships arriving from North must slow down at Buyukdere for Sanitary Control. In case of non-performance of such control due to bad weather, Master has to inform Agent in time and have to stop and wait at South Entrance of the Bosphorus until Sanitary Control is performed otherwise heavy fine would be levied.

Also see "Shipmaster's Report".

RADIO: Wirelesses to be routed to Agent via Istanbul Radio. Call sign of Istanbul Radio Station is THA. Frequency MW 500 m. Ships can also communicate with Agent by radio telephone on frequency 2182 kc/s. It is recommended that ships be on watch for any radio telephone call by Agent for any berthing and operation arrangement.

TUGS: Arranged by Agent. Tug-boat compulsory for vessels over 2,000 grt, charged per hour or fraction of each operation.

2 of 970 h.p., 1 of 620 h.p. and 1 of 200 h.p. Lighters: 1 of 100 tons, 6 of 150 tons and 3 of 230 tons.

BERTHING: Priority to Army food relief and passenger ships. If no berth available then ships to wait for turn in roads at anchor.

Wharves:	*length* m.	*Depth of Water* m.
Karakoy (ex Galata) exclusively for passenger vessels	520	7–10
Salipazari	600	10
Sarayburnu	240	6
Camialti and Haskoy (Golden Horn)	68	3–4

Haydarpasa. This port, protected by 2 breakwaters of an overall length of 1,709 m., has quays of 1,988 m. total length, that may simultaneously accommodate 6 medium-sized vessels and where cargo operations may be made direct to and from wharves or railway trucks.

The draft of water at the quays varies between 6 and 10 m.

Silos: 4 grain silos are available:

Capacity	*Delivery per hour*	*Intake per hour*
34,500 tons	200 tons	100 tons
20,000 tons	120/150 tons	90/100 tons
10,800 tons	120/150 tons	90/100 tons
5,280 tons	120/150 tons	90/100 tons

Equipment – Total number of cranes: 31.

Electrical Cranes along the quays:
3 of 1.5-ton capacity
10 ,, 3 ,, ,,
6 ,, 5 ,, ,,
1 ,, 6 ,, ,,
1 ,, 8 ,, ,, (coal winch)
1 ,, 25 ,, ,, (fixed with swinging boom)
1 ,, 25 ,, ,, (gantry crane on rails)

Rubber Wheeled Mobile Cranes:
6 of 5-ton capacity
1 ,, 8 ,, ,, with caterpillar tracks
1 ,, 10 ,, ,, ,, ,, ,,
1 ,, 18 ,, ,,

BULK HANDLING: Three grain silos are available:

One of 34,500 ton capacity with 200 ton delivery/100 ton intake per hour.

One of 10,800 ton capacity with 120–150 ton delivery, 90–100 ton intake per hour.

One of 5,280 ton capacity with 120–150 ton delivery, 90–100 ton intake per hour.

TANKERS: The oil port called Haramidere is a small bay open to Southern winds and 60 km. distant from Istanbul in the Sea of Marmara. There are buoys and an oil pumping platform in this bay. Tankers can berth by dropping 2 anchors and mooring by stern at these buoys or at platform. Average sea depth is 48 ft.

Ambarli: Position 40° 58′ N., 28° 42′ E. Max. size 250,000 d.w.t. Vessels moor by the stern to a dolphin platform (offshore).

BRIDGES: There are 2 bridges: Galata Bridge is between Eminonu and Karakoy: Ataturk Bridge is between Unkapani and Azapkapi. Both bridges are opened in the morning for vessels entering the Inner Harbour (Golden Horn). Vessels wanting to pass through the bridges have to give notice in due time to the Harbour Master of Istanbul.

STEVEDORES: Gangs of stevedores secured by the Agent through the Port Monopoly, 24 hours prior arrival. Average loading and discharging rates of about 150–200 tons per gang per shift depending also on the kind of goods. Discharging operations are generally performed alongside the wharves and loading operations at buoys; however, as stated above, can also be effected alongside simultaneously with discharging. Working hours: Monday to Friday 0800/1200 and 1300/1700 hrs; Saturday 0800/1200 hrs.

MEDICAL: Master to inform Agent by cable if urgent medical assistance is required upon arrival, also indicating, if possible, seriousness of case in order to take adequate steps.

DENSITY: Always variable due to strong currents, however, can be reckoned as 1015.

FRESH WATER: Supplied by barge and shore installation at the rate of 30–60 t.p.h.

FUEL: Diesel oil, gas oil and bunker fuel can be supplied by barge at transit cost, subject 48 hours pre-advice. Fuel supplied only against advance payment in foreign exchange (dollars, sterling or Swiss francs).

GANGWAY/DECK WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: Owners or Master to decide whether this work should be underaken by the stevedores or by the crew.

CERTIFICATES: Safety, Safety Equipment, Safety Radio, Class and Freeboard documents.

CUSTOMS ALLOWANCE: 40 cigarettes and 1 bottle wine/spirits per crew member.

CARGO GEAR: Generally shore cranes operating. However, ship using own means when such cranes are not available. Full lights to be supplied by ship.

IDENTIFICATION CARDS: Seaman's book is sufficient.

CONSULS:

Albania
Austria
Belgium
Brazil
Bulgaria
Czechoslavakia
Chile
Denmark
Dominican Rep.
Egypt
Finland
France
West Germany
Great Britain
Greece
Holland
Hungary
Iceland
Iraq
Iran
Israel
Italy
Japan
Yugoslavia
Lebanon
Mexico
Norway
Pakistan
Poland
Portugal
Romania
Spain
Sweden
Switzerland
Syria
Thailand
U.S.A.
U.S.S.R.

REPAIRS: At the Golden Horn are 3 graving-docks:
One 388 ft. length, 72 ft. width at entrance
Two 279 ft. ,, 62 ft. ,,
Three 600 ft. ,, 63 ft. ,,

At Istinye (in the Bosphorus) are:
1 floating dock 137.50 m. length, 21.25 m. width with 8,500 tons lifting capacity. 1 floating dock 67.82 m. length, 30.40 m. width with 5,000 tons lifting capacity. 1 floating dock 126.14 m. length, 34.0 m. width with 10,000 tons lifting capacity. In cases of necessity floating docks of 5,000 and 10,000 tons capacity can be united and be put in operation as single floating dock with 15,000 tons lifting capacity. Every kind of repair can be effected at Istinye docks.

At Fener (Golden Horn) is a dry dock for vessels up to 600 tons, and at Kaskoy (Golden Horn) is a dry dock for vessels up to 176 tons. There are also some privately owned. All kinds of repairs can be effected.

SURVEYORS: American Bureau of Shipping, Bureau Veritas, Germanischer Lloyd, Lloyd's, Norske Veritas.

REPATRIATION: Crew exchange and repatriation is possible for citizens of Italy, Great Britain, Benelux, Sweden, Norway, West Germany, Austria, Switzerland, France, Ireland, U.S.A., Iceland, Pakistan, Monaco, Australia, Canada, Japan, New Zealand, Spain, Cyprus, Portugal, Tunis, Kenya, Iran, Yugoslavia, Romania, Morocco. Citizens of other states not specified above are subject to a Turkish visa.

AIRPORT: Yesilkoy Airport is an international airport with daily connection to everywhere. Airport distant 15 km. from Istanbul.

TIME: GMT plus 2 hours, GMT plus 3 hours in Summertime.

HOLIDAYS: New Year's Day (Dec. 31st p.m. and January 1st); National Sovereignty (April 22nd p.m. and April 23rd); Spring Day (May 1st); Sports and Youth Day (May 19th); Sheker Bayram (3 days) (movable); Courban Bayram (4 days) (movable); Liberty/Constitution Day (May 26th p.m. and May 27th); Victory Day (August 30th); Proclamation of the Republic (Oct. 28th p.m. to Oct. 30th). In the event of a holiday ending on a Friday, the Saturday that follows is considered also as a holiday in full, and normal working starts as of Monday morning 0800 hrs.

POLICE/AMBULANCE/FIRE: Fire Istanbul 21 42 22, Uskudar 33 20 30; Police 27 45 00; Ambulance Istanbul 21 15 95, Beyoglu 44 49 98, Uskudar 33 04 01.

TELEPHONES: No installation for connection facility on board.

SERVICES: Tank cleaning (gas-free service), deratisation, compass adjusting carried out by experts of shipyards or Turkish Maritime Lines.

SHORE LEAVE: Crew members are allowed ashore at all times.

SHIPMASTER'S REPORT: *Dardanelles and Bosphorus:* If a Pilot is required for both Dardanelles and Bosphorus, give 24 hours' notice through Istanbul Agent. Same Pilot remains on board for full transit, Sea of Marmara included, and this applies for both North and South-bound traffic. Pilots at Dardanelles and Bosphorus work VHF Channel 16.

Sanitary Control: Required at Buyukdere, Ship's Register, De-Rat, Crew List and certificate issued at Canakkale North-bound.
AUTHORITY: Marmara Bulgesi Liman ve Denizisleri Mudurlugu.

AGENT: Gulf Agency Co. Ltd., POB 1230–Karakoy, Istanbul/Turkey. Cables: "Gacshipping" – Istanbul. Telex 22213. Tel. 44 29 80, 457652.

IZMIR: 38.25 N. 27.09 E.

DOCUMENTS:
5 Crew Lists.
4 Passenger Lists.
2 Manifests of Transit Cargo.
3 Manifests of Inward Cargo, 1 of which must be legalised before arrival by Turkish Consulate at loading port.
1 set Bills of Lading.
2 sets Cargo Stowage Plans.
2 Stores Lists.
Health Documents.
Ships Certificates.

N.B. Ship's particulars form is to be filled in by Masters upon arrival at Izmir, and remitted to the Port Authorities.
PILOTAGE: Vessels are permitted to arrive and sail from Izmir by day and night. After entering the Gulf of Izmir, Masters who are not familiar with the waters, require a Pilot at Pelican Spit. The pilotage from Pelican Spit to Izmir is not compulsory and Masters must notify their Agents at least 12 hours in advance giving their ETA at Pelican Spit and ask for a Pilot.

Pilot can be contacted on VHF Channel 16.
ANCHORAGE: In the Outer Harbour, 300 m. outside Old Port breakwater, ample space for vessels to anchor. Cargo operations cannot be performed at anchor unless vessels have red label cargoes aboard for Izmir or in transit.
RESTRICTIONS: Docking of ships at the old port is not permitted during night, but ships can sail any time during night. At the new port, docking is permitted during night (weather permitting) also ships can sail any time during night. There are no tides at Izmir.
MAX. SIZE: Vessels of any size with a max. of 33 ft. draft can operate at Izmir. There is a pipe-line for oil-carriers in the Gulf of Izmir where tankers with a max. draft of 33 ft. can operate.

In Old Port, length restricted to 165 m., max. draft 8 m.
HEALTH: Vessels to show their Sanitary Certificate – if available aboard – also their Registry. Presentation also of Vaccination Certificate of all the crew, if required by sanitary officials. Pratique is necessary on arrival even if the vessel has called at another port in the same country. Sanitary Certificate is required for live animals aboard. If quarantine (fumigation) of the vessel is necessary, very considerable time is lost, and expense incurred because vessel must proceed to Fumigation Station at Klazomene, located at about 20 miles from Izmir (in the Gulf of Izmir) where fumigation can be effected and bad cases hospitalised.
RADIO: Izmir Radio Station: call letters TAN2. Istanbul Radio Station: call letters TAH.
TUGS: Tugs are compulsory for vessels of more than 2,000 grt. At Harbour Master's estimation, 2 tugs will be used for vessels over 4,000 g.r.t. in case of bad weather. Dues will be collected for each tug.

Four tugs of 200, 300, 970 and 1200 h.p. continuously available.
BERTHING: *Old Port:* Location Lat. 38° 25′ N. Long. 27° 10″ E. Harbour entrance to port 130 ft. wide, depth 40 ft., harbour length 1,200 m., harbour width 700 m. (Pilots boards 0.25 mile off entrance).

Precaution to be taken against N.E. and South winds. Mooring stern to quay. Operations effected by means of lighters. Altogether 8 vessels can berth in Inner Harbour with a draft of 24 to 30 ft.

Alsancak: Located at a distance of about 2 miles from the old port. Depth alongside berths 22 to 33 ft. Pilot's board vessels outside breakwater old port. Presently 9 cargo vessels of various sizes (mainly medium and small sizes) otherwise 5 to 6 large vessels can operate at the new port. There is also a berth for 1 large passenger vessel or 2 small size vessels.
BULK HANDLING FACILITIES: Grain silo has capacity 40,000 tons. The conveyor can deliver between 2,500 and 3,000 tons in 24 hours.

Bulk ore loaded by grabs. Daily loading capacity per shift of 8 hours is between 750 to 1,000 tons.
STEVEDORES: Straight time 0800–1200, 1300–1700 hrs. Overtime 1800–0200, 1300–1700 hrs. (Saturdays). Sundays and holidays as well as Saturdays from 1300 hrs.: overtime charges 50% increase on S.T. charges.

For overtime discharging operations at the new port, handling charges (overtime) from ship's tackle to the Custom's warehouse, are for account of the ship.

9 men per gang aboard (6 labourers, 2 winchmen, 1 hatch tender) 3 lightermen or men on the Dock.

Extra men used to reinforce regular gangs and in hatches congested with cargo for discharge secures a quick despatch.
MEDICAL: Advance notice optional. There is a local English-speaking doctor for service on board vessels.

Hospitals: U.S. Military Hospital, French Hospital, Government Hospital (Memleket). Doctors available to board ships or patient to proceed to their clinics.

U.S. Military Hospital for emergency cases only.
TANKERS: Izmir is a discharge port for tankers. Socony Mobil Oil receives petroleum products in bulk through a pipe-line at a distance of about 1 mile from their shore installations. Depth at the end of the pipe-line is 33 ft. The pipe-line is of 12 in. and the pumping is effected through a flexible of 10 in. at an average of about 450/500 t.p.h.

British Petroleum, receives petroleum products at jetty where the tankers berth stern to with a max. draft of 23 ft. Pumping is effected by the vessel from her stern with a 6 in. flexible hose.

Petrol Ofisi receives petroleum products at their jetty. Vessels berthed stern to with a draft of 17 ft. Same procedure for pumping as for British Petroleum. The above three installations are located in the Gulf of Izmir opposite the new port of Alsancak.
FRESH WATER: Fresh water is available for drinking. The water is given both from dock or by barge. Water is supplied by Port Monopoly. Delivery at the dock about 20 t.p.h. By barge about 40 t.p.h.

Two barges each of 200 tons capacity available.
FUEL: All kinds of fuel available subject to 24 hours' advance notice. Fuel supplied only against advance payment in free foreign exchange direct to Agent of the vessel.
DEVELOPMENTS: New port of Alsancak to be extended during the next five years by the construction of a breakwater, docks, warehouses totalling a berthing capacity of additional 5 to 6 cargo vessels.
GANGWAY/DECK WATCHMEN: Services of the watchmen recommended. Three shifts of 8 hours per day.
OPENING/CLOSING HATCHES: This work can be carried out by crew. If carried out by stevedores the cost is charged to vessel.
CERTIFICATES:
Deratisation Certificate.
Registry.
Vaccination Certificates (if required).
Health Certificate.
CUSTOMS ALLOWANCE: 50 cigarettes for each member of the crew going ashore. Aboard the vessel each member of the crew is permitted to have one carton out of Bond. Wine and/or spirits: One litre for each member of the crew in an open bottle is permitted out of Bond. However, this allowance is to be kept aboard the vessel.
IDENTIFICATION CARDS: Seamen's Book is sufficient.
CONSULS:

U.K. General Consulate	tel. 32501
West Germany Consulate	" 34916
U.S. Consulate General	" 32137
Italian Consulate	" 33882
Greek Consulate	" 32622
Belgian Consulate (Honorary)	" 24110
Danish Consulate (Honorary)	" 24018
Norwegian Consulate (Honorary)	" 32066
French Consulate General	" 23116
Luxemburg Consulate (Honorary)	" 35737
Swedish Consulate (Honorary)	" 24878
Netherlands Consulate (Honorary)	" 32064
Finland Consulate (Honorary)	" 24930
Spanish Consulate (Honorary)	" 33689

REPAIRS: Ship's repair shops available: Denizcilik Bankasi (Turkish State-owned), Lui Tius (private). Deck and engine repairs are possible.
DRY DOCKS: No dry docks available.
REPATRIATION: All facilities available for crew changes and arranging necessary repatriation.
AIRPORT: Airport from dock – distance 30 kilometres. Airport is served by Turkish Airlines with 5 flights per day (local flights in connection with Istanbul International flights). Also one daily flight from Izmir to Athens (Greece) and back by Turkish Airlines.
TIME: Local time 2 hours ahead of GMT. Summertime GMT plus 3 hours.
HOLIDAYS: New Year's Day (from December 31st 12.00 hrs. to January 1st, 24.00 hrs.); National Sovereignty Day (from 22nd April, 12.00 hrs. to April 23rd, 24.00 hrs.); Spring Day (May 1st); Constitution Day (May 27th); Sports Day (May 19th); Victory Day (August 30th); National Holiday (October 28th, 12.00 hrs. to October 30th, 24.00 hrs.); Sheker Bayram (3 days) movable; Kurban Bayram (4 days) movable.

On these days offices are closed. Work in port is allowed by paying 50% overtime to the S.T. wages. The overtime for the National Holiday (Oct. 29th) is paid 100% on the total regular overtime, which makes 300%. On the first days of Sheker and Kurban Bayram work aboard is unlikely.
POLICE/AMBULANCE/FIRE: Police, tel. 22771; Ambulance, tel. 22319; Fire, tel. 22222.
TELEPHONES: It is possible to place telephones aboard vessels at the new port of Alsancak.
SHORE LEAVE: Crew members are allowed to go ashore.
REGULATIONS: Berths at the new port of Alsancak are obtained on basis of the time and date of arrival of each vessel. If the port is congested, vessels wait for their turn at anchor.
DELAYS: During the active export season, some delays occur varying one or two days.
AUTHORITY: Izmir Harbour Master.

AGENT: Gulf Agency Co. Ltd., POB 857, Izmir. Tel. 32755 and 32864. Telex 52371. Cables: "GACSHIP" Izmir.

MERSIN: 36.47 N. 34.38 E. (See Plan Book)

DOCUMENTS:

5 Crew Lists.
4 Passenger Lists.
2 Transit Cargo Manifests.
3 Inward Cargo Manifests, one of which must be legalised prior arrival by Turkish Consulate at loading port; if no Turkish Consulate, same to be certified by local Customs Authorities.
1 each of the Bills of Lading accompanying Manifests.
2 Cargo Stowage Plans.
Health Documents.
Ship's Certificates (Safety Equipment, Safety Radio, Class and Freeboard Documents).
2 Store Lists.

PILOTAGE: Agent orders Pilot through Port Monopoly Administration. Master to wire ETA notices 48 and 24 hours prior to arrival. Pilot boards vessel with service boat hoisting red and white flag. Sound signals: 2 long and 1 short blast. Pilot boards vessel outside main breakwater. Shipmaster can use VHF station according existing international frequencies.

ANCHORAGE: Safe anchorage in open roads outside main breakwater.

RESTRICTIONS: No particular restrictions. Ships can anchor in roads outside main breakwater at any time without Pilot.

MAX. SIZE: No limitation of draft in open roadstead, at anchor. Maximum draft in port alongside quay: 11.6 m. for tankers, 9 m. for other ships.

HEALTH: Clearance is effected on arrival. Vaccination Certificates to be presented if required. If suspected disease on board radio Agents full details before arrival.

RADIO: Istanbul Radio, call sign TAH, Izmir Radio, call sign TAM2, Mersin Radio TAM5. Wireless messages to be routed to Agent, preferably via Istanbul Radio. Port VHF service in operation.

TUGS: Tug boat compulsory for vessels over 1,000 grt. charged per hour or fraction of each operation. 4 tugs available up to 1,200 h.p.

BERTHING: Priority to Army, food relief and passenger ships. If no berth available then ships to wait for turn in roads at anchor.

	Length m.	*Depth m.*
Quay No. 1 (Passenger Quay)	175	10
Quay Nos. 2 and 3	274	10
Quay No. 4	150	10
Quay Nos. 5, 6 & 7	493	10
Quay Nos. 8 & 9	275	10
Quay Nos. 10, 11, 12 & 13	each side 577	6 to 8
Quay Nos. 18 & 19 (ore and coal)		10

BULK HANDLING FACILITIES: At Quay Nos. 8 and 9 there is conveyor system which can deliver 600 t.p.h. from each spout. Discharging rate 100 t.p.h. from each of the 2 suckers.

STEVEDORES: Gangs of stevedores secured by the Agent through the Port Monopoly, to be ordered 24 hours prior to arrival.

Generally 2 consecutive shifts of 8 hours per day. Discharging/loading rates average:

100 tons per shift general cargo.
200 tons per shift bagged cargo.
150 tons per shift baled cargo
175 tons per shift bulk ore

Max. rate for ore 400 tons per shift if grab loading.

MEDICAL: Master to inform Agent by cable if urgent medical aid is required upon arrival, also indicating if possible seriousness of case in order that adequate steps can be taken.

TANKERS: Quays No. 20 and 21, 350 m. long, berths on each side with depth of 12.5 m.

ATAS Refinery Terminal: Depth in harbour channel, 11.2 m. and, in approaches to channel, 12.3 m. Turning basin 1,148 ft. diameter, depth 42 ft. 8 in. Depth alongside berths 48 ft. 6 in.

Maximum length 229 m., draft 11.6 m. Tankers up to 12.19 m. draft have berthed.

Tankers in ballast up to 15,000 d.w.t. may berth/unberth at any time, day or night. Other vessels manoeuvre in daylight hours only.

One finger pier, berths for 2 tankers, 10-in. hose connections to 26-in. shore line. No facilities for slop disposal ashore.

Fresh water available from barge 100 tons each load.

DENSITY: Salt water 1025.

FRESH WATER: Fresh water supplied to tankers by barge but otherwise by shore installation at the rate of 30/35 t.p.h.

FUEL: Almost all kinds of fuel available in transit and facilities for delivery to ships.

GANGWAY/DECK WATCHMEN: Available and recommended.

OPENING/CLOSING HATCHES: Owners or Masters to decide whether this work should be undertaken by the stevedores or by the crew.

CUSTOMS ALLOWANCE: 200 cigarettes and 1 bottle wine/spirits per crew member.

CARGO GEAR: Generally shore cranes operated. However, ship using her own means when such cranes are not available. Full lights to be supplied by ship.

IDENTIFICATION CARDS: Seamen's Book is sufficient.

CONSULS: Lebanon, Italy, Norway and Sweden.

REPAIRS: Welding and other minor types of repairs are possible.

REPATRIATION: Repatriation can be arranged by air.

AIRPORT: Adana Airport served only by domestic line THY (Turkish Airlines) with routes to Cyprus (ERCAN), Ankara and Istanbul. Distance is 75 km. from Mersin. Twice per week to Cyprus (ERCAN), twice daily to Ankara and 3 times daily to Istanbul.

TIME: GMT plus 2 hours, Summertime GMT plus 3 hours.

HOLIDAYS: New Year's Day, 1.5 days (31st December 0.5 day. 1st January 1 day); National Domination 1.5 days (22nd April 0.5 day, 23rd April one day); Spring Day, 1 day (1st May); Youth and Sport Day, 1 day (19th May); Liberty and Constitution Day, 1.5 days (26th May 0.5 day, 27th May 1 day); Victory Day (20th August); Republic Day 2.5 days (28th October 0.5 day, 29th and 30th October); Ramazan Day 3.5 days (14th September 0.5 day, 15th, 16th and 17th September), every year 10 days earlier start; Kurbam Day 4.5 days (21st November 0.5 day, 22nd, 23rd, 24th and 25th November), every year 10 days earlier start; All Saturdays and Sundays.

POLICE/AMBULANCE/FIRE: Telephone numbers: Police 3439; Ambulance 3555; Fire 0000.

TELEPHONES: No installation for connection on board.

GENERAL: Two consecutive shifts every day, the first one starting 0800–1700 hrs. and the second one at 1700–2400–0100 hrs. Agent may provide extra men if necessary to help ship's despatch. Ships have to hoist a Turkish flag.

SHORE LEAVE: Crew allowed shore leave.

AGENTS: Gulf Agency Co. Ltd., PO Box 328, Mersin. Turkey. Cable Address: "Gacship" Mersin. Telex: 67141. Telephones: 1080, 3730.

SAMSUN: 41.19 N. 36.21 E.

PILOTAGE: Refer to "Canakkale" and "Istanbul".

Harbour Pilot compulsory for all foreign vessels. Ordered by Agent subject to vessel's advance notice of ETA.

ANCHORAGE: Good anchorage in the Outer Harbour.

TUGS: Tugs are available.

BERTHING: Harbour protected by two breakwaters, entrance width 300 m., depth 11.9 m.

One quay, 956 m. long, depth alongside from 6.5 to 11 m., providing 4 deep-water berths.

FRESH WATER: Available from the quay.

FUEL: Not available.

STEVEDORES: Working hours for general cargo: From 0800 to 2400 hrs. in 2 shifts.

For bulk cargo: 24 hours operations in 3 shifts.

TRABZON: 41.01 N. 39.46 E.

PILOTAGE: Refer to "Canakkale" and "Istanbul".

Harbour Pilot compulsory for all foreign flag vessels. Arranged by Agent subject to vessel's notice of ETA in advance.

ANCHORAGE: In the Outer Harbour off the breakwater.

MAX. SIZE: Vessels up to 29 ft. draft.

TUGS: Two tugs available. Towage compulsory for vessels over 550 tons.

BERTHING: Main wharf 410 m. long, depth alongside 10 m. Vessels may be loaded and discharged while moored stern to the breakwater.

FRESH WATER: Obtainable from the quay.

FUEL: Fuel oil obtainable in limited quantities.

STEVEDORES: Working hours from 0800 to 1200 hrs. and from 1300 to 1700 hrs. Overtime can be arranged.

REPAIRS: There are no repair facilities.

ZONGULDAK: 41.28 N. 31.49 E.

PILOTAGE: Refer to "Canakkale" and "Istanbul".

Harbour Pilots obtainable from Coaling Company, Pilot boards off port entrance by launch. Ordered by Agent subject to vessel's ETA given at least 24 hours before arrival.

ANCHORAGE: Good anchorage off the harbour in depth of 13 fathoms, sand and mud bottom.

Anchorage prohibited South of a line drawn in direction 292.5° distance 7.5 cables from head of the Northern breakwater. The Southern limit of this area is a line drawn in direction 262° from the head of the Northern breakwater to the shore.

RESTRICTIONS: Harbour entrance between breakwaters. Entrance width 600 ft.

Traffic signals displayed from signal mast on Northern breakwater, as follows:

2 black balls or 2 red lights, meaning "Harbour closed."

2 black cones or 2 green lights, meaning "Harbour open."

A black ball over black cone or red light over green light, meaning "Do not attempt to enter".

A black cone over a black ball or green light over a red light, meaning "No tug available."

A black ball between 2 black cones or red light between 2 green lights, meaning "Wait. You will be piloted into the harbour."

3 black balls, or 3 red lights, meaning "Because of unfavourable weather you cannot be piloted into the harbour."

TUGS: Available.

BERTHING: Coal quays length 1,650 ft. depth alongside 10 m.

Cargo quay length 500 ft. depth alongside 10 m.

Northern Breakwater, 2 berths, at inner end with depth of 7 m. alongside.

FRESH WATER: Available from the quays.

FUEL: Only coal bunkers available.

Union of Soviet Socialist Republics

GENERAL: ALL PORTS:

(a) List of Soviet ports and port roads opened for foreign vessels:

I. Arctic Ocean Ports

1. Murmansk
2. Onega*
3. Archangel
4. Mezen
5. Naryan-Mar
6. Igarka

*Since 1971 the port of Onega is closed for foreign vessels from 1st September to 31st December early.

II. Baltic Sea Ports

1. Leningrad
2. Vysotsk
3. Vyborg
4. Tallinn
5. Pyranu
6. Riga
7. Ventspils
8. Klaipeda

III. Black Sea Ports

1. Reni
2. Izmail
3. Kilia
4. Belgorod-Dnestrovsky
5. Illyichevsk
6. Odessa
7. Kherson
8. Novorossiysk
9. Tuapse
10. Poti
11. Batumi
12. Yalta
13. Sochi
14. Sukhumi
15. Grigrevsky

IV. Azov Ocean Ports

1. Zhdanov
2. Berdyansk

V. Pacific Ocean Ports

1. Nakhodka
2. Aleksandrovsk-Sakhalinsky
3. Makarevsky (or Due) Roadstead
4. Octyabrsky
5. Shakhtersk
6. Uglegorsk
7. Kholmsk
8. Nevelsk
9. Makarov Roadstead
10. Poronaisk

(b) Addresses and telephone numbers of V/O "Sovinflot", V/O "Sovfracht", V/O "Sovsudopodyom" and V/O "Soyuzvneshtrans":

Vsesoyuznoe Obyedinenie "Sovinflot" acts as General Agent in providing services to Soviet and foreign flag vessels.

Postal address: V/O "Sovinflot", 1/4 Zhdanov Street, Moscow, 103759, U.S.S.R.

Tel. 296–50–32. Cables "Sovinflot Moscow". Telex 7217 and 7236.

Vsesoyuznoe Obyedinenie "Sovfracht" – All Union Chartering Association carries out operations connected with chartering of foreign and Soviet tonnage for transportation of goods, both for the Soviet foreign trade organisations and foreign charterers respectively.

Postal address: V/O "Sovfracht", 32/34 Smolenskaya-Sennaya Square, Moscow, 121200, U.S.S.R.

Tel. 244–24–11. Cables "Sovfracht Moscow". Telex 7168–7172, 7541, 7542.

Vsesoyuznoe Obyedinenie "Sovsudopodyom" performs offshore and deep-sea salvaging, ship-raising and underwater engineering works, deep-sea towage and dredging.

Postal address: 7 Shabashevsky Lane, Moscow, 125315, U.S.S.R.

Tel. 151–02–32. Cables "Sovsudopodyom Moscow". Telex 7197.

Vsesoyuznoe Obyedinenie "Soyuzvneshtrans" – handles transportation and forwarding of export and import cargoes on Soviet territory as well as transit of goods via the U.S.S.R.

Postal address: V/O "Soyuzvneshtrans", 32/34 Smolenskaya-Sennaya Square, Moscow, 121200, U.S.S.R.

Tel. 244–39–51. Cables "Suyuzvneshtrans Moscow". Telex 7266, 7291.

(c) Guiding principles to comply with when calling at U.S.S.R. ports: When calling at U.S.S.R. ports Masters of all foreign flag vessels are requested to comply with the Instructions and Provisions of the Government of the U.S.S.R. published annually in issue No. 1 of the U.S.S.R. Notices to Mariners, Special Instructions for vessels calling at U.S.S.R. in each particular sea basin published by the General Department of Navigation and Oceanography of the Ministry of Defence of the U.S.S.R. (GDNOMD).

All vessels calling at U.S.S.R. ports must also abide by the Customs and Obligatory Harbour Regulations of each particular port of call which are obtainable through the local Inflot agencies, viz. shipping agents for foreign flag vessels at U.S.S.R. ports.

(d) Ship/shore radio link: Ships' communication with ports of call is usually maintained through the local port radio stations, some information of which is given in the respective entries for the ports.

Ships' radio stations and/or radio-telephones (excluding VHF), must not be operated when the vessel navigates or lies at anchor within the limits of the port boundaries as well as when calling at or leaving the port, except in emergency, e.g.:

when giving distress signals;
when rendering assistance to other vessels in distress;
while making way through the ice;
after having obtained special permission of the Harbour Master.

Note: Superiority in use of radiocommunication means is given to an icebreaker when leading a convoy of ships through the ice; in case there are two or more icebreakers in a convoy – to a leading icebreaker.

Vessels equipped with VHF radiotelephones must keep them operated in the calling Channel stipulated by the Obligatory Harbour Regulations when navigating within a port limit.

(e) Notice of arrival: At first 48 hours and later 2 hours prior to arrival at a port (roadstead) of destination (in case of tankers and ships carrying perishable goods – 72 and 12 hours respectively) Masters must give through the Inflot Agency notice to the Port Administration about vessel's ETA.

According to Charter Parties, Sale Contracts and other documents stipulating conditions of carriage of goods by sea, Masters should give necessary information to additional addresses at stipulated time.

The Port of destination Authorities should be immediately informed by the Master about all unforeseen delays during the voyage.

In the preliminary notice the Master should state the following information:

Name and Nationality (flag) of the ship;
Port of departure (last port of call);
Draft fore and aft; cargo carrying capacity, volume of holds. Measures of hatches, number and location of tween decks, etc.;
Nature and total quantity of cargo and stowage plan; heavy lifts (over 3 tons) be shown separately;
Amount and position of water ballast (for tankers only);
Failure of cargo handling gear, if any;
Whether vessel requires supply of electric power from shore for the lighting purposes;
Health and sanitary conditions of the ship;
Request for port services.

Vessels calling at ports for bunkers, fresh water, provisions, etc., only, should advise their ETA, etc., to the Port Administration as per details shown above.

The Port of Call Administration should provide Masters of calling vessels with all necessary information regarding anchorage, berthing and handling of cargo not later than 2 hours prior to vessel's arrival.

All possible damages to a vessel which may occur either for lack of all relevant details mentioned above or due to untimely and/or incorrect information given by the Master to the Port Authorities when advising ETA, etc., are to be for the vessel's account.

Since for some ports time and terms of giving Notice of Arrival are different from those mentioned above, Masters are advised to look for the precise information in the entry for the particular Port of Call.

(f) Pilotage: Pilotage is compulsory for all vessels when calling or leaving U.S.S.R. sea ports, as well as when mooring and unmooring. In addition the Pilots perform shifting berths and other duties related to the harbour operations.

A Pilot having boarded a vessel shall be advised by the Master of the precise draft and other particulars necessary for safe pilotage of a vessel.

According to the Merchant Shipping Code of the U.S.S.R. the Master of a vessel shall be obliged to pay a fine in an amount of double the rate due as pilotage fee for incorrectly declaring the draft, length or breadth of a vessel or its net registered tonnage, irrespective of the liability established by law for the consequencies which may occur as a result of the incorrect information.

A Pilot should be ordered through the local Inflot Agency 12 hours prior to vessel's arrival at the Pilot boarding place. More accurate information should be given 4 hours prior to arrival unless otherwise stated in the Obligatory Harbour Regulations.

(g) Anchorages: A vessel approaching the Port of Call and not having been boarded by a Pilot immediately on arrival, or for any other reason, shall anchor in the anchorage area specially designated for the purpose and under no circumstances let its hull go across the boundaries of this area or prevent other vessels from using the leading lights, navigation marks or lights.

No anchorage is allowed in the prohibited zones shown on the charts, in special manuals for navigation and/or in the Obligatory Harbour Regulations as well as those announced in the appropriate Notices to Mariners.

No anchorage is allowed at a distance of less than 1.5 cable length off fairways and leading lines as well as in depths not providing a vessel with a safe anchorage while drifting on the anchor chain.

No vessel shall anchor within the water area of a shipbuilding yard after being refused to carry out repairs.

It is prohibited to change a vessel's anchorage by drifting.

Vessels carrying explosives or inflammable liquids must anchor in the areas recommended for them only.

All vessels when at anchor shall carry the lights or the marks as to the International Regulations for prevention Collisions at Sea. Apart from that every vessel by night, when at anchor, shall be illuminated from stem to stern with additional lights placed so that the hull be as far as possible visible from the surface of the water.

Vessels using a kedge anchor shall, in addition to the lights and the marks as to the International Regulations for Prevention Collisions at Sea, conspicuously display by night a white light and by day a red flag lowered from the stern by the anchor chain to the extent of half of the side's height.

In restricted visibility whether by day or night, every vessel when at anchor shall use sound signals conforming strictly with the International Regulations for Prevention Collisions at Sea.

All vessels when in port must hoist their national flags on the stern's flagstaff.

During Winter months all vessels when in Arctic ports must hoist their national flags daily until they are visible and during Summer from 0800 to 2000 hrs.

Masters of all vessels when at anchor are not allowed without the Harbour Master's consent, except in emergency, and/or in case of Port and Boarding officials, to give anybody permission to come alongside in a private launch or a small rowing boat whether under oars or sail and board a vessel.

Swimmers must not be allowed to come on board a ship.

Should, in case of emergency, swimmers have been taken on board or strangers have been discovered aboard a vessel, the Master of such ship shall forthwith without delay report the fact to the Harbour Master and shall later hand those people over to the Representatives of the Port Administration.

(h) Regulations for entering and leaving U.S.S.R. ports: When approaching U.S.S.R. ports all vessels must follow the recommended courses announced in issue No. 1 of the U.S.S.R. Notices to Mariners.

All vessels when approaching a port or a Pilot's boarding place as well as when leaving a port during the daytime must keep their National flags hoisted. A vessel's National flag must be kept hoisted on the stern flagstaff from 0800 hrs. in the morning up to sunset, and the U.S.S.R. National flag on the fore mast. In arctic ports during a prolonged period of light time National flags must be kept hoisted from 0800 till 2000 hrs.

Every vessel coming from abroad shall hoist Quarantine Signals of the International Code of Signals depending on health and sanitary conditions on board.

For entry permit a vessel must contact the Port Control service either by VHF radio-telephone or by means of visual signals, viz, by day, hoisting her call-sign, and by night, making call-sign signals in Morse Code by searchlight or by Morse-lamp.

No ship shall enter the Harbour until the proper signal has been hoisted at the signal station or by a pilot boat authorising such entry.

No vessel is allowed to enter the Harbour until the prohibition signals hoisted at the signal station shall have been lowered down.

If entry is refused a vessel must immediately slow down, alter course and if possible leave the fairway, and drift or drop her anchor in the recommended area.

Turn of entry to the Harbour is controlled by the Port Administration with regard to tonnage of vessel, nature of cargo, weather conditions in the port area, readiness of the port to start cargo operations and other circumstances.

Simultaneous entry of two or more vessels to the Harbour or vice versa is not allowed in the majority of ports.

In all cases a vessel entering the Harbour must give way to the outgoing one not preventing her manoeuvrability.

(i) Sanitary and Quarantine requirements: It is prohibited by law to contaminate inner and territorial waters of the U.S.S.R. with any kind of substances which are considered to be unhealthy for people or harmful to alive resources of the sea. It is also prohibited to discharge into the sea oil contaminated, faecal, washing waters and oil residues; no rubbish, waste foodstuff shall be thrown into the water. The list of harmful substances is published annually in issue No. 1 of the U.S.S.R. Notices to Mariners.

Not later than 6 hours before arrival Masters of all vessels coming from foreign countries to the U.S.S.R. ports should advise Quarantine Authorities by radio through Inflot Agency giving full details of health conditions on board as well as sanitary conditions at the last port of call.

If medical assistance is required on board Master has to contact Inflot Agency. All vessels with open sewage system are prohibited to call at ports of the U.S.S.R.

No shore connection is allowed to a vessel until free pratique is obtained.

Foreign vessels are granted free pratique after the arrival formalities have been accomplished by the Boarding Officials, viz, Health Authorities, Customs and Immigrations.

Masters are advised to ask a Sanitary Officer for inoculation, vaccination, fumigation, de-contamination, etc., if required, whilst he is on board a ship together with the other Boarding Officials.

Veterinary Certificates of Good Health are required for the livestock, all kinds of meat, animal food and raw meat stuff brought to the U.S.S.R. ports from abroad. Certificates should be issued by the proper authorities of the country from which the cargoes have been exported.

Masters should have a Phytoquarantine Certificate for the goods of vegetable nature.

It is prohibited to take ashore fruit, vegetables, grain seeds, plants, plant products, etc., without a certificate issued by a local branch of the U.S.S.R. Agricultural Quarantine Inspection; animals and birds are also not allowed to be brought ashore without a Veterinary Certificate.

(j) Documents:

Upon arrival at a U.S.S.R. port: The following ship's documents should be produced by the Master to the representative of Inflot Agency for further examination by the boarding officials upon arrival at a U.S.S.R. port (Also see "Annex 2" below):

Ship's Patent.
Measurement Certificate.
Load-line Certificate (or International Load-line Exemption Certificate).
Passenger Ship Safety Certificate.

Upon arrival at the port of destination the Master must fill in the following standard IMCO shipping documentation forms:

General Declaration, 2 copies.
Cargo Declaration, 4 copies.
Ship's Crew Personal Effects Declaration, 2 copies.
Crew List, 4 copies.
Passenger's List, 4 copies..

In Addition the ship's administration should declare to the Inspector of the Health Authorities the following documents:

Ship's Health Certificate;
Deratisation Certificate;
International Certificates of Vaccination;
Maritime Sanitary Declaration.

The Master fills in a form of the Master's Declaration (Shipowner's address, cargo, cases of illnesses on board, if any, etc.) with the Agent's assistance.

In accordance with article 38 of the Merchant Shipping Code of the U.S.S.R. a foreign flag ship which, on calling at a U.S.S.R. port, raises doubts as to her meeting the requirements of safe navigation may, irrespective of whether she possesses the necessary ship's papers mentioned above, be subjected to an examination by way of technical survey on the same basis as ships sailing under the State Flag of U.S.S.R.

The Obligatory Harbour Regulations to be complied with fully during a vessel's stay at a U.S.S.R. port should be handed over to the Master either by Pilot or by representative of the Harbour Master's Office, or by Agent.

ANNEX 2

The Memoranda for Masters of Foreign Vessels calling at Soviet Ports.

1. On arrival of the ship the Master is to submit to the representatives of the port authorities the following documents (IMCO forms) duly signed by ship's administration:

General Declaration (Form I). Filling in of points 8 and 11 is not compulsory (5 copies).

Cargo Declaration (Form II). (4 copies). Filling in of point 6 is not compulsory; points 7, 8 and 9 are to be filled in only for:

a) cargoes for which Bills of Lading were not issued (names of Shippers and Consignees to be stated);
b) transit cargoes;
c) cargoes for other Soviet ports;
d) cargoes of agricultural origin;

Ship's Stores Declaration (Form III) – not required.

Crew's Effects Declaration (Form IV). Amount of Captain's and Crew members' valuables (gold, silver, platinum, jewellery, bonds, travel checks, etc.), personal fire arms and cartridges (ammunition), explosives and narcotics are to be stated in point 2 (2 copies).

Crew List (Form V) (4 copies).

Passenger List (Form VI) (4 copies).

2. The Master of a ship is to instruct all members of the ship's crew that in accordance with the Rules in force in Soviet ports:

Exportation and importation of Soviet currency is forbidden;

No articles are permitted to be taken ashore or brought on board the ship without permission of the Custom House Authorities;

Articles taken ashore or brought on board the ship and concealed from Custom's control shall be regarded as smuggled goods liable to confiscation with a fine imposed;

Likewise, the sale of any articles of foreign origin on the territory of the USSR will be regarded as smuggling;

No wastes shall be thrown into the water or on the quay; the discharge of oil contaminated water and/or oil residues is prohibited;

All mooring ropes must be fitted with rat-guard plates;

Only one gangway must be led ashore at night when loading or discharging is not carried out;

It is prohibited to take ashore grain, seeds, plants, plant products, soil, etc. as well as animals and birds;

Violation of the above-mentioned rules will entail penalty in accordance with the laws of the USSR.

Upon sailing from a U.S.S.R. port: No other documents apart from those mentioned are required in order to obtain the authorisation to leave the port.

No vessel is to get under way without having obtained the permission of the Harbour Master.

The authorisation to leave the port shall be given after a vessel herself and her draft shown in the Master's Statement have been checked by a Port Authorities' representative.

The Harbour Master may not allow a vessel to leave the port, if:

(1) The Cargo Loading Regulations have not been fulfilled, *i.e.* a vessel is considered overloaded or wrongly loaded in case:

a) a vessel's load lines corresponding to the maximum depth to which she should have been loaded are under water without any list;
b) the cargoes loaded in the holds and/or on deck have not been made fast in a proper manner or have not been made fast at all;
c) a vessel has a bad list* caused by faulty loading or her stability does not correspond with the ship's documents;
d) a vessel loaded with bulk or liquid cargoes has not used the necessary materials or accommodations to prevent cargoes from shifting or overflowing in case of vessel's pitching and rolling;
e) the deck cargo is considered as danger to the safety of a vessel and the safety of life on board caused by faulty loading;
f) the corresponding regulations for loading of dangerous cargoes or cattle to be carried by vessel have been broken;
g) other loading regulations have not been abided by in the course of loading.

(2) Under other circumstances which may cause a danger to the safety of a vessel and the safety of life on board, as well as in case when the ship's documentation regulations have been infringed.

(3) When the port dues, tolls and fines have not been paid.

All expenses which may occur due to a vessel's possible delay in the port in connection with the reasons stated above are to be for the Owner's account.

Note: *According to the Harbour Regulations a vessel is not allowed to leave a port if her list exceeds 5° or she has a trim by bow which was not specified by her construction.

(k) Customs Regulations and Allowances: Commodities and articles not designed for the port of call are not allowed to be taken ashore and should be sealed by a Customs Officer, if necessary, immediately after the clearance formalities have been accomplished or after the part of the delivered cargo loaded and stowed at the same place has been discharged.

In all U.S.S.R. ports alcohol and tobacco articles are allowed to be taken ashore in small quantities and for personal consumption only.

(l) Berthing: Berthing can only be effected with tug assistance and a State Pilot on board. Likewise, no vessel shall leave or shift berth without employing the services of a Pilot authorised by the Port Administration to make the voyage in question.

Vessels must take up the berths assigned to them and conform strictly to the Obligatory Harbour Regulations in force.

A Pilot or the Agent shall provide the Master with all necessary information as regard to depths, tugs, conditions in the Harbour, etc., before mooring and shifting berth starts.

The responsibility for the safety of a vessel during her manoeuvring and berthing as well as for possible damages to a berth or other port facilities shall always rest with the Master.

No vessel is allowed to change berth due to handling of cargo or for any other reason unless the main engines, the mooring winches, the steering gear, etc., are in good working order and there is sufficient number of the members of the crew to ensure shifting berth when required.

It is strictly prohibited to work with vessel's propellers when lying alongside berth. To avoid damage to the underwater parts of a berth while mooring or unmooring every vessel must have the main engines going "dead slow" until her stern is 10 m. from the quay.

When berthing, Masters should use strong and reliable mooring lines and make them fast over the quay pile-moorings and bollards only. It is strictly prohibited to make fast mooring lines over any part of the quay equipment which has not been intended for that purpose.

When lying alongside berth, every vessel must have a gangway or a gangway board with a lifeline secured along, led ashore and made fast. There should be a life net under the gangway platform and a lifebuoy nearby. Gangways must be sufficiently illuminated at night.

(m) Stay in port at berths: When lying alongside berths, all vessels to be moored by long safe ropes which are to be kept fast at all times, and constant watch should be kept by day and at night.

All mooring ropes must be fitted with rat-guard plates.

From sunset to sunrise all vessels' decks, cargo decks and gangways must be illuminated.

Every vessel, whether in the outer roads or in the harbour, must always have on board a sufficient number of crew to be able to ensure both the ship's safety and her everyday routine. Vessel's fire-fighting and life-saving equipment must always be ready for use on board or to render assistance to other vessels or shore objects in case of emergency.

When in port, no vessel is allowed, without having obtained the Harbour Master's permission, to make repairs to the main engines or to the ship's auxiliary equipment thus depriving her of the opportunity to shift berth at short notice in case of emergency.

It is not allowed, without the permission of the Port Administration, to use vessel's boats, underwater oxygen and any underwater apparatus of other types.

No vessel is allowed to clean boilers or discharge any sort of chemicals or organic products into the water, giving off smoke and sparking from vessels' funnels.

(n) Ship's movement in the harbour and shifting berths: No vessel shall leave or shift berths without the permission of the Port Authorities. In case there are no provisions in the Contract of Carriage of Goods by Sea or in the Bill of Lading, a vessel shall accomplish one shifting from berth to berth during the course of her loading and shifting upon unloading to the loading berth at the Owners' risk and expense. Any subsequent shifting shall be at the expense of the goods.

All shiftings in the port connected with a vessel's needs, viz. bunkering, loading supplies and/or provisions, making repairs, etc., shall be at the expense of the vessel.

All haulings both during the course of loading and unloading shall also be at vessel's expense.

(o) Tugs assistance: Tugs, if necessary, are usually ordered by the Master according to a Pilot's advice.

In some ports use of tugs during mooring and shifting berths is compulsory due to the heavy conditions of navigation.

Masters shall be charged for tug assistance, if required, according to the current port rates. Time for use of tugs shall be counted from the moment of leaving their usual berthing place up to the moment they return.

Notes: In all the U.S.S.R. ports 1 hour time is fixed for passage of a tug-boat to a vessel from her usual berthing place and vice versa after she has accomplished her assistance, except the port of Archangel where 2 hours time is applied. For detention of a tug-boat a vessel shall be charged as per usual working time.

For cancellation of a tug, a vessel shall be charged full rate, including detention time and time of passage of a tug from the berth to the vessel and vice versa.

When ordering a tug for unmooring, Master should fill in and sign a special application form given by the Agent. The actual time of completing the towage shall be approved by the Master of a towed vessel.

In ports where the towage is compulsory when mooring and shifting berths, the Master shall be charged for the tugs' assistance whether used or not, and having refused tugs shall be held responsible for the consequences thereupon.

(p) Notice of readiness: In case there are no special provisions in the Contract of Carriage of Goods by Sea, the Master shall, during the established office hours upon the accomplishment of Customs formalities and having obtained free pratique, deliver through his Agent in the port, viz. Inflot Agency, a notice of the ship's readiness for loading or unloading to the consignee or the shipper.

The notice of the vessel's readiness shall be considered accepted if she is actually ready to load the cargo into or unload it out of all the vessel's holds or tanks.

(q) Handling of cargo: All cargo handling areas in the ports are under control of the Port Administration which shall provide vessels with labour, tally staff, sheds and warehouses, employees, etc.

To ensure successful handling of cargo the vessel shall, when required by shippers or consignees, receive or discharge cargo day and night, as well as on Sundays and holidays, furnishing free of charge all necessary cargo handling gear. Though in most ports the cargo handling is done by port cranes both from the quays and lighters, a vessel shall, in some ports, use her own cargo handling equipment, which has to be in good working condition.

In the latter case, the Master shall produce to the Agent the Cargo Equipment Certificate which must be valid.

Loading or unloading time is calculated as to the rates stipulated in a Charter Party or according to the Customs of the Port in the absence of same.

Should the port labour participate in the opening or closing of hatches, a vessel's administration shall be responsible for the rules of safety engineering to be complied with.

Opening and closing of mechanised ship's hatches shall always be done by the ship's crew.

Should shore cranes be used for loading or unloading instead of a vessel's cargo-handling equipment, the Master shall beforehand remove aerials, aerial halyards, stay rods, wires, etc., crossing the air space over a ship's hatches and preventing the shore cranes' derricks from free circulation.

The vessel's derricks shall not project over the sides.

(r) Agency: All foreign vessels upon arrival at the U.S.S.R. ports are attended by the maritime agencies Inflot.

Inflot agencies provide foreign vessels with the following services:

Inform the Port Authorities and other organisations about vessels' expected time of arrivals (ETA), nature and quantity of cargo to be handled, expected time of loading or discharging, etc.;

Render assistance to the Masters in obtaining Pilots, tugs, berths, launches, etc.;

Perform all the necessary formalities connected with the vessels' arrival and departure;

Ensure that Masters are acquainted with the Port Rules, Obligatory Harbour Regulations as well as other documents and instructions issued by the Port Authorities;

Give advice to the Shipowners and other interested parties regarding vessels' movement and the prospects for the handling of cargo;

Render help in speeding up cargo—handling operations;

Provide vessels with supervisors and tallymen;

Prepare time sheets and submit them to the Masters, Port Authorities and Shippers (Consignees) for their further approval;

Sign on Masters' behalf cargo and other documents;

Arrange bunkering, delivery of fresh water, provisions, technical supplies and all kinds of ship-repairs;

Render help to the members of the crews in obtaining medical assistance;

Make payment of dues, charges, fines (if any), etc., on behalf of the Shipowners and for their account;

Take all necessary measures for improvement of the handling of cargoes and ships' services;

Look after the Court (Arbitration) cases and cargo claims on behalf of the Shipowners;

Make Sea Protests as well as translation and duplicating of any documents on Masters' requests;

Repatriate members of the crews from the U.S.S.R. to their home ports;

Invite surveyors qualified by the U.S.S.R. Register of Shipping to conduct vessels' surveys;

Make extension of ships' documents;

Render help to the Shipowners in delivering and redelivering of their vessels on time charter;

Assist in arranging cargo fumigation on board;

Perform any commissions on the instructions of the Shipowners in regard to the ships' services and protection of their interests before any Authorities.

It is in the interest of the Master to advise Inflot Agency timely information as regard to a vessel's name and flag, ETA, gross register tonnage; draft fore and aft; position of cargo in hold (stowage plan); number, weights and location of heavy lifts, number and length of oversized (over 9 m.) pieces and Owners' cable address and telex number thus putting the Agent in a position to calculate the approximate sum of the disbursement expenses and ask the Shipowners to remit same (disbursement accounts are to be paid before vessel's departure).

Note: Bearing in mind the fact that most of the shore offices are closed on Sundays and holidays, the Master shall cable to Inflot Agency well in advance his order for bunkers, repairs, technical supplies and cash to enable the Agent to make necessary arrangements.

All branches of Inflot Agency work round the clock, including Sundays.

Cable address of any branch of Inflot Agency is "Inflot", e.g. "Inflot Leningrad".

(s) Fire safety measures: Fire safety measures at U.S.S.R. ports must comply with the provisions of the International Code for the Carriage of Dangerous Goods by Sea. Every vessel upon arrival at a port must keep constant fire watch day and night and have fire-fighting and life-saving equipment always ready for action. Members of the crew must keep strictly to the Fire Safety Regulations especially during vessels' stay at oil and timber berths. Giving off smoke out of the funnels is strictly prohibited. In all the U.S.S.R. ports a fire brigade could be called over the phone by dialling 01 in case of fire.

(t) Medical assistance: Medical assistance, if required, is available, including vaccination and inoculation as well as dispensary and hospital treatment in all the U.S.S.R. ports. In case of emergency an ambulance or a doctor should be called for by telephone – 03 in all the ports.

(u) Customs of the ports: Customs of the ports should apply in case:

(1) there is no Contract of the Carriage of Goods by Sea at all;

(2) there are no provisions in a Charter Party or in the Bills of Lading in respect of items covered by these Customs;

(3) a Charter Party or a Sale contract and/or any other Contracts of the Carriage of Goods by Sea specially refer to these Customs of the Ports.

(v) National and general holidays of the U.S.S.R.: National and general holidays in the U.S.S.R. are fixed.

5 days working week with 2 holidays has been introduced for most of the industrial enterprises, government and commercial offices and other institutions. Saturdays and Sundays are weekly holidays in the U.S.S.R.

The other holidays are:

1st January (New Year's Day); 8th March (International Women's Day); 1st and 2nd May (Days of International Workers' Solidarity); 9th May (World War II Victory Day); 7th and 8th November (Anniversary of the Great October Socialist Revolution, 1917); 7th October (U.S.S.R. Constitution Day).

Places of Recreation for foreign seamen: In the majority of the Soviet commercial sea ports foreign seamen can spend their spare time in the International Seamen's Clubs which can offer concerts by professional and amateur actors and singers, evenings of public hearing of the recorded Russian and foreign music.

Soviet and foreign films, etc. The sightseeings are usually organised by the local excursion bureaux.

ARCHANGEL: 64.32 N. 40.31 E.

LOCATION: A White Sea port. Archangel is situated at the mouth of the Severnaya Dvina river, in the S.E. corner of Dvina Bay. A part of the harbour is situated at the Northern end of the Povrakulsky Island, at the junction of the Maimax river and the Kuznechikha river, and is called the Economia Avant-port. The total length of the port area is about 30 miles.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Compulsory. Notices of ETA in accordance Soviet Wood Charter Party. Pilot boat located in area of the light buoy "Mudyugsky I". VHF Channel 16. Pilot boat is tug-boat with word "Pilot" on wheelhouse. Vessels awaiting Pilot may anchor at safe distance to North from pilot boat location. In event bad weather pilot boat goes to shelter, being available by VHF radio.

While waiting for a Pilot, vessels may lie at anchor at a safe distance to the North from the pilot boat location.

In the event of bad weather a Pilot shall board a vessel at a sheltered place shown by him.

When a Pilot is not able to board a vessel due to weather conditions, a pilot boat is usually situated on the Southern side of the Mudyug Island. In this event vessels should anchor at the entrance of the channel from seaward and wait for a Pilot's arrival.

ANCHORAGES: There are several places which can be used by foreign vessels for anchorage. They are:

(1) The outer roads with depths from 10.0 m. to the North and N.W. from the reception buoy "Mudyugsky I".

(2) The Chizhovsky roadstead with depths of 7.0–9.0 m. is used by all vessels while the Customs formalities are carried out both before entering and leaving the port.

(3) The Solombala roadstead with depths of 5.0–9.0 m. is used by vessels for anchorage while awaiting a berth for loading cargo.

(4) The roadstead of the Maimaksansky timber port with depths of 5.0–9.0 m. is used by vessels while awaiting a berth for loading cargo or when awaiting good weather for going to sea being fully loaded.

(5) The Lower-town roadstead with depths of up to 6.0 m. is used for anchorage by coastal traders.

(6) The Town roadstead with depths of 6.0–9.0 m. is used for anchorage by vessels while waiting for bunkering or time for passage under the railway bridge.

(7) The Krasnoflotsky roadstead with depths of 9.0 m. is used for anchorage by vessels awaiting a berth for loading or a passage time under the railway bridge. The ground at all roadsteads – mud and sand; anchoring is performed according to the Pilot's recommendations.

RESTRICTIONS: Ice breaks up in April. Port area open from end of April through to November.

During the time of high water vessels can enter the port through the approach channel Berezovy Bar if having length not more than 160 m. and draft not exceeding 7.9 m. Changes of passage drafts are published in the U.S.S.R. Notices to Mariners. Vessels going to timber mills No. 2 and No. 3 as well as to the cargo area Bacariza pass through the central draw span of the railway bridge twice during 24 hours (by day and night). During bad visibility (less than 5 cables) movement of vessels within the port is not allowed.

HEALTH: All vessels coming from foreign countries inspected by Sanitary Office. If no diseases vessel obtains free pratique. If vessels entering after calling at another U.S.S.R. port, pratique automatic.

RADIO: All information from sea may be routed through Murmansk Radio (UMN) and Archangel Radio (UGE), A1 500 kc/s., A3 2182 kc/s.

All vessels when approaching the port of Archangel should establish radio contact through the coastal "Archangel radio" station which operates 24 hours per day on the following frequencies:

Call Sign	Frequencies working (kc/s)	Frequencies calling (kc/s)	Type of trans-mission	Time	Remarks
UGE	500	500	A1	H24	
UXN	6237	6268.5	A1	H24	Operates from 05 mins. – 15 mins. each hour.
	8610	8362	A1	H24	
	12795	12540	A1	H24	
	16867.5	16726	A1		
Archangel-radio	2182	2182	A3	H24	During navigation only
	13119.5	—	A3H		
	(mHz)	(mHz)			
"Port" (Port control)	156.80	156.80	F3	H24	,,
"Lotswakhta" (Pilots' watch)	156.80	156.80	F3	H24	,,
"Inflot" (Inflot agency)	156.80	156.80	F3	HX	,,

The storm signals station is situated in the Solombala area on the embankment of the Severnaya Dvina River named after George Sedov (64° 35′ N., 40° 30′ E.).

Storm signals are shown by the International Code of Signals by day and by Morse system at night.

Masters of vessels proceeding to the port of Archangel should advise ETA and all necessary information to the Inflot Agency as per conditions of the "Soviet Wood" Charter Party.

24 hours prior to arrival advise ETA to Inflot Agency. Four hours prior to approaching the "Mudyugsky I" Masters should advise more precise time of arrival.

TUGS: If necessary ordered 2 hours before arrival and normally join vessel near berth. Usually use ship's lines.

BERTHING: To certain extent depends upon tides. 37 berths available with depths alongside up to 8.5 m.

There are a large number of berths in the port along the river front, as well as at the Economia Avant-port.

Berths are equipped to handle timber, wood-pulp, paper, machinery and general cargo. There are enclosed warehouses and concrete floor sheds in the port.

CARGO HANDLING FACILITIES: Berths of the commercial port are equipped with mobile electric cranes of up to 20 tons capacity. Loading of timber from berths of timber mills is made by electric cranes and vessels' cargo gear. There are also floating cranes from 5 to 100 tons capacity as well as other cargo handling equipment and intraport transport means.

BRIDGES: Vessels proceeding to load cargo at sawmills 2 and 3 have to pass under bridge which is opened twice a day.

STEVEDORES: No particular ETA advices to stevedores/shippers required except those mentioned in Soviet Wood C/P. Loading rates, etc., also stipulated by Charter Party.

Mobile electric cranes of up to 20 tons capacity are operated on the quays. There are also floating cranes of up to 50 tons capacity, other cargo handling equipment and intra-port transport facilities. Sometimes, cargo handling is by vessels' gear.

MEDICAL: If any medical attention or prompt assistance required, Master has to contact Agent. No advance notice required. Clinic and hospital available.

DENSITY: Fresh water practically throughout port.

FRESH WATER: Usually delivered by self-propelled barges (minimum charge for 15 tons). A few berths equipped with shore water lines.

FUEL: Bunkers (diesel oil, gas oil, fuel oil) can be taken from barges stationed in the Town roadstead or can be delivered by lighters.

FIRE PRECAUTIONS: While lying alongside timber berth vessel to take maximum fire precautions.

DEVELOPMENTS: For the immediate future no draft increase expected. Some berths under reconstruction and cranes being installed to load timber.

GANGWAY/DECK WATCHMEN: Not available from shore. Usual watch kept by ship's crew.
OPENING/CLOSING HATCHES: Normally carried out by ship's crew.
CERTIFICATES:
Seaworthiness.
Measurement.
Loading Line.
Cargo Equipment.
Safety Equipment Certificates.
Deratisation Certificate.
CUSTOMS ALLOWANCE: Tobacco/wine: No quantity limits, but not allowed to be brought ashore.
IDENTIFICATION CARDS: Only Seamen's Books required.
CONSULS: No Consuls in Archangel.
REPAIRS: All types of repairs possible, also underwater surveys.
DRY DOCKS: There are floating docks with capacity up to 7,000 tons.
REPATRIATION: Repatriation and crew changes require visa formalities.
AIRPORT: Airport near town. Served by regular airlines.
TIME: GMT plus 3 hours (All year).
HOLIDAYS: General holidays: all Sundays and Saturdays: January 1st (New Year's Day); March 8th (World Women's Day); May 1st, 2nd (World Labour Day); May 9th (Victory Day); November 7th, 8th (Great October Socialist Revolution Day); December 5th (U.S.S.R. Constitution Day). Cargo work on these days at shippers' discretion.
POLICE/AMBULANCE/FIRE: Police 02; Ambulance 03; Fire 01.
TELEPHONES: Can be arranged on board.
SERVICES: Compass adjusting, radar and radio repairs, etc.
SHORE LEAVE: Each crew member properly signed in Ship's Articles and having valid seamen's Book allowed ashore.
DELAYS: On account of rain when loading timber.
NAVIGATION: Masters proceeding for loading timber should bear in mind that the swing bridge on their way to timber mills No. 2 and No. 3 is open twice daily.

All vessels with drafts of less than 3.6 m. especially when engaged in towing timber rafts, should keep out of the way of deep-drafted vessels when passing through narrow places and approaching channels both at sea and in the river, and should not hamper their safe passage in such places. They should also safely pass vessels engaged in dredging of a channel.

When approaching a bend in a channel, every vessel should beforehand give a signal by 1 prolonged blast on her whistle or siren, reduce her speed and when it is safe and practicable, keep to that side of the channel which lies on the starboard side of such vessel.

Every Master when passing through a narrow channel, or approaching a bend in a channel should take positive early action prescribed by the International Regulations for Preventing Collisions at Sea to avoid a risk of collision with a vessel approaching from the other direction.

Deep draft vessels shall not overtake each other when navigating in the channel of the Beresovy Bar. A vessel proceeding to the port along the course of the channel must keep out of the way of another vessel leaving the port.

No vessel shall navigate in the port harbours in restricted visibility when navigational lights, marks, leading lights, buoys, etc. are not visible.

Ice: At the head of Dvina Bay drift-ice extends as far as 12 miles from the shore by the end of November. The Severnaya Dvina estuary usually gets frozen over at the beginning of November. At Dvina Bay the ice usually breaks up in April and at the Severnaya Dvina estuary – at the beginning of May. Thus, navigation in the port area lasts between 6 – 7 months from May till October.

Powerful ice-breakers, ice-strengthened vessels and tugs are maintained by the Port of Archangel Authorities to assist in navigation of the Dvina Bay waters and off the coast when ice conditions prevail.

Tide: The tidal range at the head of Dvina Bay reaches 0.8 m. – 1 m. and at Mudyug Island 0.1 m. – 0.5 m.

The in-going flood stream is usually stronger and about 1 hour longer in duration than the out-going ebb stream.

Sometimes the in-going stream at the bar of Severnaya Dvina may be hardly observed, being reduced to a few minutes of slack water. It may run steadily for some time then gradually attains its usual strength and goes on to set up to the time of high water.

The tidal streams in the Severnaya Dvina are considerably influenced by both strength and direction of the wind.

Moderate Northerly and Westerly winds increase the height of the tide and hold the fall of the water.

Only the in-going flood streams have been observed at the Severnaya Dvina estuary at springs. The extreme tidal range of the water level observed there is about 4 m.
AUTHORITY: Harbour Master.

AGENT: Shipping Agency "Inflot", Archangel. Tel. 35874, 38573, 34040.

BATUMI: 41.39 N. 41.38 E. (See Plan Book)

DOCUMENTS: Refer to beginning of U.S.S.R. section.
PILOTAGE: Compulsory. Batumi situated in South of Black Sea Caucasian coast, at head of Batumi Bay. Navigation is year round. Navigational range marks to note when approaching port are: Batumi beacon, Burun-Tabia light, Batumi light buoy with siren and Batumi leading light marks. When proceeding Batumi, Master should give 96 hours notice prior arrival, advising Port Controller and "Inflot" Agency: time of arrival, description and quantity of cargo brought in, location, ship's draft and length, as well as declare services required. 4 hours prior to approaching port, Master shall advise more precise time of arrival. Inflot will arrange Pilot.

Pilot boards vessel either at the Receiving Buoy or in the outer port roads. Watch is kept by a pilot boat day and night.
ANCHORAGES: The port harbour is protected by a mole from the seaward and provides a safe anchorage except at times when South-Westerly, Westerly and North-Westerly winds blow and the "Tyagun", strong variable current with surge is formed.

At the time of "Tyagun" vessels are recommended to stop cargo handling operations and go out to sea.

During South-Westerly winds which are considered particularly dangerous and usually accompanied by heavy surge, Masters should observe special precautions and take all necessary measures to avoid impact with the mole.

The outer roads of the port with depths of about 9–20 m. and 0.5 cable in width, extend for a distance of about 1.5 miles to the East-North-Eastward from the Batumi light buoy along the edge of the shoal. The bottom is mud and sand.

The inner roads are situated between the Western coast of the Batumi Bay and the shoal extending from the Southern and South-Easterly coasts of the Bay. Depths in the inner roads are between 25 m. – 11.5 m.

The anchorage in the inner roads is exposed to Northerly winds. However it is not safe during strong winds blowing from other directions.

Every vessel when in the inner roads must take necessary measures so as not to drag her anchors.

The recommended anchorage is in the outer roads at a distance of 7.8 cables to N.N.E. from the Eastern side of Batumi Point, depths 9–14.4 m.

In the outer roads vessels may anchor only after having obtained the Harbour Master's permission and according to Pilot's recommendation.

In the inner roads vessels may obtain anchorage only Eastward of the entrance leading line. It is strictly prohibited to lie at anchor both on the leading line and to the West of it.
BALLAST: In case of stormy weather, in Autumn and Winter particularly, vessels without cargo must enter the port with ballast water on board, having ensured fore draft not less then 1.5–1.8 m.

Ballast water should not be contaminated with oil residues.
RESTRICTIONS: Vessels may enter and leave the port at any time of day and night. All vessels when entering or leaving the port must have keel clearance of not less than 0.3 m. (1 ft.).

In the event of stormy weather vessels approaching the port at time of S.W. and N.W. winds particularly, should obtain Harbour Master's entry permit. Vessels coming to the port without cargo are obliged to enter the port with ballast water taken in such a way that bow draft should not be less than 1.5 – 1.8 m. Ballast water must be clean. If due to the "Tyagun" vessels are not allowed to enter the harbour, they should anchor either in the outer or inner roads.

All necessary information as regard to changes of wind, possibility or turn of entry to the port for vessels at anchor in the outer roads, is given by the Harbour Master over the VHF radio-telephone or by the signal station by flags of the International Code of Signals, in Morse Code or by semaphore signals.
MAX. SIZE: For oil carriers: Berth No. 1, 175 m. LOA 31.6 ft. draft; Berth No. 2, 165 m. LOA 30.5 ft. draft; Berth No. 3 165 m. LOA 30.5 ft. draft; Berth No. 4, 150 m. LOA 29.5 ft. draft: Berth No. 5, 212 m. LOA 29.5 ft. draft. For Cargo ships: Two berths where vessels may discharge. Maximum draft 32.5 ft.
RADIO: All vessels when approaching the port of Batumi should establish radio contact via Batumi Radio port radio station operating 24 hours per day on the following frequencies:

	Frequencies (kHz.)		*Type of*	
Call Sign	*Working*	*Calling*	*Trans- mission*	*Time*
UHK	8695	8366	A1	H24
"Batumi-Radio"	2182	2182	A3	H24
"Udarnik–2" (Port Control)	156.8*	156.8	F3	H24
"Usluga" via CPR**	156.8*	156.8*	F3	H24

*Frequencies are given in mHz. **CPR – Central Port Radio Station.
Shore signal station is situated 1.6 cables W.N.W. from Batumi Point. International Code signals, and sometimes storm signals, are hoisted at the mast of the signal station.
BERTHING: The berths of the port with depths alongside of up to 10.5 m. are equipped to handle crude oil and oil products, bulks (coal, grain, ores) and general (machinery and mechanical equipment) as well as passenger shipping. There are covered warehouses and concrete floor sheds in the port.

A vessel should lie at a berth with her bow directed to the port entrance and with her anchor dropped from the proper side. Berthing in the harbour may only be effected with tugs' assistance.

A vessel may be berthed at the outer side of the Oil Jetty after having obtained the Harbour Master's permission.

Vessels entering or leaving the harbour are not allowed to pass vessels loading at the outer (Northern) side of the Oil Jetty at a distance of less than 80 m.

The berths of the port are equipped with electric cranes of up to 10 tons capacity. There is also a floating crane of 100 tons capacity.

Other cargo handling equipment, covered warehouses and concrete floor sheds are available.

TANKERS: Mooring buoys are placed to the North of the oil jetty and a pipe-line for loading tankers of up to 40,000 d.w.t. is led up to them. Mooring of such tankers is effected with tug assistance under control of the Senior Port Pilot. Vessels moored to these buoys should drop 2 anchors from the bow with 7–8 shackles of anchor chain and strong mooring lines should be lead to mooring buoys from the stern and made fast.

When lying at mooring buoys a vessel should keep a 24 hour VHF watch on receiving Channel and observe corresponding rules of the Port.

TIDE: The range of water level in the port area is small and is due to the effects of strong winds. The maximum range observed 0.6 m.

MEDICAL: Medical attendance in local seamen's hospital. Masters to advise by radio prior arrival of medical attendance required on board.

DENSITY: 1018.5.

FRESH WATER: Supplied ex-shore to ship directly. Maximum pressure 20 t.p.h. Also supplied ex water barge. Maximum quantity delivered by barge is 650 tons. Pressure about 60–80 t.p.h.

FUEL: Bunkers may be taken at the oil berths and can also be delivered by bunkering vessel to a ship handling non-dangerous cargo. In the latter case fire precautions must be strictly observed by the vessel taking bunkers.

FIRE PRECAUTIONS: No special precautions. There is one fire-fighting boat.

OPENING/CLOSING HATCHES: According to Charter Party and contract.

CUSTOMS ALLOWANCE: Tobacco. No restrictions. Wine and/or spirits. No restrictions.

IDENTIFICATION CARDS: Not required.

CONSULS: Turkey.

REPAIRS: Only minor repairs are possible.

AIRPORT: Batumi connected by airlines with different towns in Soviet Union. Airport situated about 5 km. from port.

TIME: GMT plus 4 hours (All the year round).

HOLIDAYS: New Year's Day; 8th March (Women's Day); 1st May; 7th–8th November; 5th December; but port works on those days.

SHORE LEAVE: Crew members allowed ashore till midnight.

SHIPMASTER'S REPORT: There is now a sea-loading berth at this port immediately outside the harbour, the vessel lying to 2 anchors and stern on close to the breakwater and close Eastward of the harbour entrance.

The stern is secured to 2 buoys, using ship's ropes, 5 to a port quarter buoy and 3 to a starboard quarter buoy.

The bow is in about 60 ft. of water and the stern in about 42 ft., and vessels of up to about 40,000 tons d.w.t. are loaded there, this vessel loading safely to a draft of 37 ft. 6 in.

Two 10-in. pipe-lines are connected on the starboard side, 1 for discharging ballast ashore and 1 for loading at a rate of about 1,600 t.p.h. The charge for discharging ballast ashore is 7 kopeks per ton and it is not permitted to discharge any ballast into the harbour.

1 copy of a money list was required.

AUTHORITY: The Port of Batumi Authority.

AGENT: The port of Batumi Main Maritime Agency "Inflot", postal address: 5 Gogebashvili Street, Port of Batumi, U.S.S.R. Cables: Inflot Batumi. Tel. 9–24–15.

BELGOROD-DNESTROVSKY: 46.12 N. 30.21 E.

GENERAL: The commercial sea port of Belgorod-Dnestrovsky is situated on the North-Western part of the Black Sea coast, on the right side of the Dnestrovsky Estuary (the Southern Basin), at a distance of 80-90 km. to the S.W. of the port of Odessa. Navigational season lasts all the year round, with powerful (600-1,200 h.p.) tug assistance during severe Winters. The Tsaregradsky Lighthouse and the Tsaregradsky Leading Line should be used as guiding points when approaching the port.

Vessels should approach the port along the channel of the Dnestrovsky Estuary which is provided with a good navigational marks system.

PILOTAGE: A Pilot usually boards vessel at Reception Buoy No. 1 (Lat. 46° 04′ N. Long. 30° 30′ E.) situated 1.2 miles to the S.E. of the Tsaregradsky Lighthouse.

ANCHORAGE: The port outer roads with depths of up to 14 m. are situated 0.5 mile to the S.E. of the Reception buoy. The holding ground is good. There are 2 inner roadsteads. One situated on the beam of the Bugas port area and well protected from wind from all directions but Southern is used for anchorage while awaiting lifting of the bridge. The second inner roadstead is situated within the port area of the protecting mole.

RESTRICTIONS: Vessels are allowed to navigate along the channel during daytime only. The port can be entered by vessels with draft of up to 5.2 m. and the maximum height (from the water level) of 26.5 m. Vessels having draft more than 4.5 m. should follow the channel at a speed not more than 5 knots.

During bad visibility vessels which are not equipped with radar are not allowed to navigate along the channel. Vessels are piloted under the bridge 2-3 times daily (during daytime only).

RADIO: Communication is effected through the port radio station "Belgorod-Dnestrovsky-Radio"

Call sign	Frequencies (kHz) working	calling	Kind of transmission	Time of work
"Belgorod-Dnestrovsky-Radio"	156.8	156.8	F3	H24

Notice of Arrival: When approaching the port of Belgorod-Dnestrovsky Masters of vessels should not later than 48 hours prior to arrival advise the Harbour Master of ETA, draft, maximum height of a vessel in ballast (from the water level up to the top of a mast), kind and quantity of cargo, services required to the vessel. 24 and 4 hours prior to arrival the Master should advise more precise ETA.

TUGS: If necessary, are ordered by the Master after having consulted the Pilot.

BERTHING: The berths of the port have depths alongside of up to 6.5 m. and are equipped to handle timber, containers, generals (rubber, non-ferrous metals, pipes, tinned products, fresh vegetables, fruit and citrus fruit) and other cargoes. There are covered warehouses and open concrete floor sheds in the port.

A port area Bugas is situated 14 km. to the South of the port, at the mouth of the Estuary.

Vessels fully laden with ballast water are as a rule allowed to moor at berths if winds do not exceed force 6. A vessel of a smaller size may be turned broadside to a loaded vessel of a bigger size but not vice versa. It is strictly prohibited to turn a third vessel broadside on to another two vessels having been turned broadside earlier.

Opening and closing of mechanised hatches is usually performed by the vessel's crew. Opening and closing of ordinary hatches is carried out by the crew on arrival and departure of a vessel and by the dockers during cargo handling operations. On the berths and on the port territory there are cranes of 10 tons lifting capacity.

FRESH WATER: Available at berths.

FUEL: Diesel oil available.

REPAIRS: Only minor repairs are possible.

CONSULS: None.

TIME: GMT plus 3 hours all year round.

AUTHORITY: The Port of Belgorod-Dnestrovsky Authority.

AGENT: The port of Belgorod-Dnestrovsky Maritime Agency "Inflot".

Postal address: 81, Shabskaya Street, 272300 – Belgorod-Dnestrovsky, the city of Odessa, region, U.S.S.R.

Cables: Inflot Belgorod-Dnestrovsky. Telephone: 2-21-01; 2-56-73. Telex: 425.

BERDYANSK: 46.45 N. 36.48 E. (See Plan Book)

DOCUMENTS: Refer to beginning of U.S.S.R. section.

APPROACHES: The port of Berdyansk is situated in the N.E. part of Berdyansk Bay, on the Northern coast of the Azov Sea.

Inner roads and port facilities are protected from Southern and S.E. winds by a mole and a breakwater.

Navigation in the port is all year round, but in Winter ice-breaker assistance is necessary for about two months.

Vessels should proceed to the harbour through the approach channel, with least depth of 7.0 m.

PILOTAGE: Pilot meets vessel at Reception buoy No. 14.

ANCHORAGE: Vessels may obtain good anchorage with depths up to 7.0 m. in the port of Berdyansk outer roads situated on both sides of the approach channel leading into the harbour.

The outer roads are well protected from Northerly winds, but during Southern and S.W. winds the anchorage is troublesome.

At time of strong S.W. swell ships in the outer roads are usually effected by heavy pitching and rolling, and plenty of cable should be paid out on both anchors. Holding ground in outer roads is shell and mud.

RESTRICTIONS: Vessels can enter and leave at any time of day and night.

At least 0.3 m. (1 ft.) keel clearance at low tide is required to enter or leave the port. The max. permitted draft for entry to the port is 6.7 m., and length 160 m.

Speed of vessels proceeding through the approach channel should not exceed 6 knots. Vessels are not allowed to enter the approach channel or navigate in the harbour in restricted visibility and fog.

RADIO: *Notice of arrival:* 48 hours prior to arrival at the port Masters should advise the port administration via the local Inflot Agency time of arrival and the maximum draft of a vessel. Not later than 4 hours prior to approaching reception buoy No. 14, placed at the beginning of the approaching channel, Masters should advise more precise ETA to the Harbour Master.

Vessels should establish radio contact through "Berdyansk Radio" port radio station operating 24 hours daily on the following frequencies:

Call Sign	Working	Calling	Type of transmission	Time
UBH	500/418 kc/s.	500 kc/s.	A1	H24
UBN	6345 kc/s	4202 kc/s	A1	H24
Berdyansk-Radio	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

BERTHING: Berths of the port with depths alongside of up to 8.25 m. are equipped to handle general and bulk cargoes (ores, mineral-building materials), metals, cotton, foodstuff, vegetables, etc., and passenger traffic. There are covered warehouses and concrete floor sheds in the port.

Quay are equipped with electric cranes of up to 32 tons capacity. There is also a floating crane and other cargo-handling equipment and intraport transport facilities.

FUEL: Available in limited quantities.
FRESH WATER: Supplied at berths.
REPAIRS: Only minor hull and machine repairs.
TIME: GMT plus 3 hours (All year round).
AUTHORITY: The Port of Berdyansk Authority.
AGENT: Maritime Agency "Inflot" at the port of Berdyansk. Postal address: 9 Uritsky Street, 332400-Berdyansk. U.S.S.R. Cables Inflot Berdyansk. Tel. 3-34-42, 3-92-639.

GRIGOREVSKY: 46.35 N. 31.10 E. (approx.).

GENERAL: New port under construction in Grigorjyevskiy Liman, about 16 miles N.E. of Odessa. Port expected to commence operations 1976, and to have a depth of about 14 m. Port is to be used for shipment of chemical products.

IGARKA: 67.24 N. 86.30 E. (See Plan Book)

GENERAL: A sea and river port, Igarka is situated about 344 miles Southward of the mouth of the Enisei river which flows into the Enisei Gulf of the Kara Sea.

The port is open for navigation about (130-135 days) from July till mid-November. Ice first begins to form in the second half of October.

No tidal range is observed in the port waters.

The port of Igarka specialises in timber exports.

DOCUMENTS: Refer to beginning of U.S.S.R. section.
PILOTAGE: Pilotage is carried out round the clock. Master of a vessel approaching the port of Igarka from seaward has to order Pilots via the Chief of the Igarka Hydrobase and the Master of the Pilot boat 48 hours prior to arrival to the Oshmarino Point where the river Pilots usually meet vessels. Confirm ETA 24 and 6 hours before arrival.

In case of bad weather, Pilot boards a vessel at a place as directed by the Pilot boat. Since the distance of pilotage from the Pilot station up to the port of Igarka is about 360 miles, 2 Pilots are usually required for the service.

The Master of a vessel should use VHF radio-telephone (calling frequency 156.8 mHz) or radio-telephone (calling frequency 500 kHz) for establishing the radio contact with a pilot boat in order to check the time and the place of boarding/unboarding of a Pilot.

ANCHORAGE: Information on best location of anchorage, if required, will be given by the pilot boat.

The anchorage in the outer roads is bounded on the East by the leading lines of Igarka and Northern Igarka leading marks, on the West by the leftbank of the Enisei river, on the North by the beam line of the buoy of Igarka Oseryodok, on the South by the leading line of Port of Igarka entrance leading marks.

In the event of bad weather or main engine trouble a vessel should lie at anchor in a place as directed by a river Pilot, who shall advise a Master all necessary data about the anchorage.

RESTRICTIONS: Vessels can enter or leave the port 24 hours per day.

To ensure safe passage across the Lipatnikovsky and Turushinsky bars of the Enisei river, vessels proceeding to the port of Igarka must have draft not exceeding 7.3 m. (see "Max. Size.)

MAX. SIZE: Max. LOA 160 m. Also see "Restrictions".
HEALTH: Not later than 4 hours before arrival, Master to radio "Inflot" advising health condition on board. International code quarantine signals to be shown on arrival at port limits. No one, except Pilot and Port Authorities, may board or leave the ship until free pratique is given after port health inspection.
RADIO: Radio communication is effected through the "Igarka-Radio" port radio station operating on the frequencies given below.

	Frequencies (kHz)		*Type of*		
Call sign	*working*	*calling*	*trans-mission*	*Time of work*	*Remarks*
UFR	500	500	A1	H24	Operates during navigation only
"Sever" (Port)	156.65*	156.8*	F3	H24	

*Frequencies are given in mHz.

Notice of arrival: As per conditions of the "Soviet Wood" Charter Party.

TUGS: Normally join vessel with Harbour Pilot on approaching port. Vessels at anchor order tugs through "Inflot". Ship's tow lines used.
BERTHING: Tug assistance for berthing is compulsory. A berthing Pilot boards a vessel from a tug either in the outer roads or in the port. Depths alongside berths are up to 7.5 m.

After having approached a berth at a safe distance, a vessel, in most cases, should cast 2 anchors and then with tug assistance, turn stern to the Island and moor with 3 mooring ropes led from the stern. When mooring, a vessel should have ready on board 4 mooring ropes each not less than 100 m. in length (3 ropes to be led ashore and 1 prepared for a tug.).

Vessels moored in the inner roads must have strong ropes which should be made fast over the pile moorings only.

If 3 or 4 vessels are moored at the quay, the outside ones should have a red light exhibited in the middle of each mooring rope led ashore.

Notice of readiness and other conditions of loading – as per the "Soviet Wood" Charter Party. Opening and closing of hatches by ship's crew.

When a vessel is moored in the inner roads, stern to the Island, loading is by floating cranes; when at berth – ship's derricks are used.

Loading is done by ship's wire strops, with a test label attached to every strop.

MEDICAL: Medical assistance is free, hospital facilities available – all arrangements made by "Inflot".
DENSITY: Fresh water.
FRESH WATER: May be taken from the river in places indicated by the Pilot, but not in the port area.
FUEL: Not always available.
GANGWAY/DECK WATCHMEN: Ship's crew to provide watchmen services.
OPENING/CLOSING HATCHES: By ship's crew.
IDENTIFICATION CARDS: Required for crewmen going ashore.
CUSTOMS ALLOWANCE: Only reasonable quantities for personal consumption may be taken ashore.
REPAIRS: Only minor repairs.
REPATRIATION: No facilities.
AIRPORT: Situated 1.5 km. away, 1 daily flight to Krasnogarsk.
TIME: GMT plus 7 hours (all the year round).
HOLIDAYS: No official holidays are observed during the navigation season.
POLICE/AMBULANCE/FIRE: Police, tel. 0-02; Ambulance, tel. 0-04; Fire, tel. 0-01.
TELEPHONES: Telephones cannot be connected on board vessel.
SHORE LEAVE: Permitted during 0600–2400 hrs. subject to police control.
GENERAL: It is forbidden for crew to swim in the harbour.
AUTHORITY: Port of Igarka Authority.
AGENT: "Transflot". Cables: "Transflot" Igarka.

ILICHEVSK: 46.20 N. 30.39 E. (See Plan Book)

GENERAL: The port of Ilichevsk is situated on the N.W. coast of Black Sea, on the right bank of the Sukhoi Liman, about 15 miles S.W. from Odessa City.

The Sukhoi Liman is divided by dams into 3 parts called Basin No. 1, Basin No. 2 and Basin No. 3.

A part of Basin No. 1 bounded by the leading line of the Port of Ilichevsk leading lights, thence by the S.W. coast of the Liman, thence by the Southern Sand Headland, is called the Inner Roads of the port.

The berths for large sea-going vessels are along the Western side of the Southern Sand Headland, thence along Southern and S.W. sides of Basin No. 1.

The berths of the Western side of Basin No. 1 are used by fishing trawlers.

Navigation in the port is year round. Ice usually begins to form in the second half of December and finally disappears in February. Ice-breaker assistance is required in severe Winters for about a 30 day period.

DOCUMENTS: Refer to beginning of U.S.S.R. section.
PILOTAGE: A Pilot usually boards a vessel in the outer roads at the approach light mid-channel buoy. (Lat. 46° 18′ 24″ N., Long. 30° 43′ 30″ E.). In the event of bad weather the place of embarkation or disembarkation of a Pilot can be changed with a Master's approval.
APPROACHES: The approach channel leads from seaward into Basin No. 1. Depths in mid-channel are 13.5 m. Strong Easterly and Southerly winds may cause heavy surge in the channel influencing a vessel's manoeuvrability.
ANCHORAGES: A good anchorage can be obtained in the outer roads situated at a distance of 2 miles off the coast between the parallels of 46° 17′ N. and 46° 21′ N. The outer roads are open to all winds blowing from N.E. via S. up to S.W.

The anchorage (on charts marked as No. 24) is situated about 1.2 mile to the S.E. of the port entrance.

The holding ground is grey mud and clay. Depths in the roads are 19.2 m.–25.5 m.

RESTRICTIONS: Entry to the port can be effected day and night.

Vessel's speed should not exceed 5 knots when navigating along the channel.

MAX. SIZE: The maximum permitted draft is 11 m. length 260 m.

Vessels drawing over 11 m. must obtain the Harbour Master's permit for entry to the port.

HEALTH: Foreign vessels granted free pratique when berthed alongside and all arrival formalities accomplished by the boarding officials, irrespective whether day or night. If berthing delayed, under certain circumstances vessel may be granted free pratique at roads where anchored. Event suspected disease Master shall inform Agent by radio. When arriving from another Soviet Black Sea port, free pratique automatic.
RADIO: Channel 16 (156.80 mc/s) for radio-telephone used for calling only, with subsequent switch to any other Channel. All information adressed to ship's Agent, Cable address "Inflot Ilichevsk", Telex No. 232448. Port Radio UEH.2.

Radio contact can be established through the port radio station "Ilichevsk Radio" operating 24 hours daily on the following frequencies:

Call sign	Frequencies (kHz) Working	Frequencies (kHz) Calling	Type of trans-mission	Time of Work
"Ilichevsk Radio"	2535	2535	A3	H24
"Ilichevsk Radio-10" (CPR**)	156.8*	156.8*	F3	H24

*Frequencies are given in mHz

**CPR – Central Port Radio Station.

The port radar station gives all possible information to all vessels navigating in restricted visibility and in the absence of floating marks, from the point of a Pilot's embarkation up to the port.

Radar navigation is controlled by a Pilot.

A signal post for regulating the movement of vessels is situated at the Northern side of the entrance to the port.

TUGS: Normally join vessel when approaching mooring berth. Ship's lines used. Number of tugs required for berthing shall be ordered by the Pilot with the Master's consent.

BERTHING: Quays with depths alongside of up to 11.5 m. are equipped to handle oil, general, bulk and other cargoes. There are mechanised warehouses and open concrete floor sheds.

Electric cranes of up to 41 tons capacity are operated on the quays and by the warehouses. There are floating cranes with lifting capacity of up to 300 tons, other cargo-handling equipment and intra-port transport means.

Opening and closing of mechanised hatches is always done by the ship's crew.

TIDE: The range of the water level caused by strong winds may reach 1 m. The rise of the water level is due to Northerly winds and the fall of the water level to Southerly winds.

The changes of the water level caused by variation in atmospheric pressure ("Seish" phenomena) are observed periodically. This phenomena can last from a few minutes up to several days and the range of the water level may reach 0.6 m.

STEVEDORES: No particular ETA advices required.

RADAR: Port Radar Station gives all possible technical information to any vessel navigating within Station's broadcast zone, if requested. Navigation in channel controlled by Port Radar Station. Communication between Station and vessels established by radio-telephone on international frequencies.

MEDICAL: Medical assistance rendered immediately when requested. Hospital facilities available. Particular inoculations required prescribed by International Sanitary Regulations.

DENSITY: Average density 1.010.

FRESH WATER: Available at quays and by barge.

FUEL: Bunkers available.

DEVELOPMENTS: At present port only partially constructed. Work of further development being carried out.

GANGWAY/DECK WATCHMEN: Watch carried out by crew.

OPENING/CLOSING HATCHES: Mechanical hatches by crew.

CUSTOMS ALLOWANCE: No restrictions. Free use on board.

CARGO GEAR: No additional requirements. Cargo work usually carried out by means of shore cranes.

IDENTIFICATION CARDS: Required.

CONSULS: None.

REPAIRS: Good facilities. All kinds of repairs for vessels of up to 60,000 d.w.t. can be carried out.

DRY DOCKS: Docking arrangements settled with Black Sea Steamship Co. of Odessa, Lastochkina 1 Street. A floating dock, 250 m. length, 18 m. depth. There is a new floating dock with a lifting capacity of 15,000 tons.

AIRPORT: The distance from Odessa Airport about 30 km.

TIME: GMT plus 3 hours. (All year round).

HOLIDAYS: Official Holidays are Sundays and following Calendar dates: January 1st, March 8th, May 1st, 2nd, 9th, November 7th, 8th, December 5th.

POLICE/AMBULANCE/FIRE: All mentioned services easily obtained through Agent.

TELEPHONES: Can be placed on board.

GENERAL: Shipowners recommended deposit funds for disbursements prior to arrival. All bank operations carried out by Vneshtorgbank of Moscow.

SERVICES: Shipchandler's supplies, technical equipment supplies, laundry, car hire.

SHORE LEAVE: Permitted.

DELAYS: Vessels berthed at specialised berths depending upon cargo. Delays if berths occupied. Normally no delays in bunkering.

AUTHORITY: Port of Ilichevsk Authority.

AGENT: The Port of Ilichevsk, Maritime Agency "Inflot". Postal address: The Port of Ilichevsk, Odessa Region, U.S.S.R. Cables "Inflot Ilichevsk". Tel. 628–658, 628–661, 628–556. Telex 232448, 232245.

IZMAIL: 45.20 N. 28.51 E. (See Plan Book)

GENERAL: A sea and river port, Izmail is situated on the left bank of the Kiliiskoe Ghirlo (Kilia Mouth) of the Danube river, between the 92nd and 94th km.

Navigation in the port lasts about 317 days per year. The Danube river usually becomes frozen over at the end of December or early January. In the more severe Winters navigation can be effected with ice-breaker assistance.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Compulsory. Pilot should be ordered through "Inflot" before leaving the port of Sulina giving vessels ETA at Izmail. Alterations in ETA whilst vessel is navigating the Sulinsky channel should be advised to "Inflot". Also refer to Sulina, Romania.

Navigation in the Kilia Mouth up to the port of Izmail is allowed with a Port of Izmail Pilot on board, who should be ordered through Inflot Agency after leaving the port of Sulina. ETA at the Chatal of Izmail should be stated in the message. Masters should keep the Port of Izmail Harbour Master informed of all delays in the Sulina Channel and, if necessary, advise alterations in ETA at the Chatal of Izmail.

ANCHORAGE: Vessels can obtain anchorage in the roads situated in the area between 91.4 km. and 92 km. Depths in the roads from 5 m.-15 m., the holding ground is soft mud.

RESTRICTIONS: Izmail port is situated on the left bank of the Kilia channel, channel depths are 10-20 m. Reni port is situated on the left bank of the Danube, channel depths are 10-20 m. Ice-breakers assistance is available during periods when the Danube is frozen. Draft and length of the vessel entering the port of Izmail should be the same as of vessels navigating through the Sulina Channel.

HEALTH: International code quarantine signals are to be shown on arrival and free pratique is given by the quarantine doctor who will board the vessel to examine Master's Health Declaration.

RADIO: Vessels can establish radio contact via the port radio station Izmail Radio operating 24 hours per day on the following frequencies:

Call sign	Frequencies (kHz) Working	Frequencies (kHz) Calling	Type of trans-mission	Time of work
UJO-3	472	468	A1	HX
UJO-5	12966	12552		
	8586	8361		
	4227	4886		
"Izmail"-Radio" (CPR)**	156.6*	156.8*	F3	HX

*Frequencies are given in mHz. **CPR–Central Port Radio Station.

TUGS: Tugs shall be ordered by the Master as directed by the Pilot.

BERTHING: Vessels drawing up to 8.25 m. can enter the port and moor at berths with same depths alongside.

Quays are equipped to handle general and bulk cargoes, metals, chemicals, timber and passenger shipping.

There are enclosed warehouses, open concrete floor sheds and a grain elevator.

Simultaneous berthing and shifting berth of two or more vessels at neighbouring berths is not allowed. On the quays there are electric cranes of up to 15 tons capacity. There are floating grain elevators, floating cranes with lifting capacity of 15 tons and other cargo handling equipment and machinery.

FRESH WATER: Available in unlimited quantity.

FUEL: Bunkers available.

GANGWAY/DECK WATCHMEN: Gangway watchmen compulsory, carried out by ship's crew.

OPENING/CLOSING HATCHES: According to the customs of the port opening and closing of hatches is usually by ship's crew but it can also be done by stevedores for vessel's account.

CUSTOMS ALLOWANCE: No restrictions on crew consumption tobacco and alcohol on board. It is prohibited to take these items ashore.

IDENTIFICATION CARDS: Required for crewmen going ashore.

REPAIRS: Hull and machine repairs can be effected.

REPATRIATION: Can be arranged.

AIRPORT: Regular connections with internal services.

TIME: GMT plus 3 hours all the year round.

TIDE: Changes of water level in the river are due to effects of the wind and seasonal increase and decrease of the amount of water brought down from the shore. In Winter: rise of water level is due to the ice piling up. Max. range of the water level is about 4.0 – 6.0 m.

Max. rise of water level is in April, May and June, usually caused by Easterly winds. The least water level is observed in August September and October, due to Westerly winds.

HOLIDAYS: New Year's Day (1st January), National Women's Day (8th March); Worker's Day (1st and 2nd May); Victory Day (9th May); Anniversary of October Revolution (7th and 8th November); Soviet Constitution Day (5th December).

POLICE/FIRE/AMBULANCE: Izmail – Police, tel. 316; Fire, tel. 524; Ambulance, tel. 600. Reni – Police, tel. 205; Fire, tel. 210; Ambulance, tel. 203.

SHORE LEAVE: Allowed up to midnight.

AUTHORITY: The Port of Izmail Authority.

AGENT: The Port of Izmail Maritime Agency "Inflot". Postal address: 14 Port Street, Izmail, U.S.S.R. Cables "Inflot Izmail". Tel. 9-01-81, 9-05-29.

KHERSON: 46.37 N. 32.37 E. (See Plan Book)

GENERAL: The sea and river commercial port of Kherson is situated on the right bank of the Dnieper River and on the left bank of the Koshevaya River.

The port is open for navigation all the year round but in severe Winters ice-breaker assistance is required.

Ice at the estuary of the Dnieper finally disappears in the first half of March.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

APPROACHES: The port is accessible for sea-going vessels. The approaching channel is very well marked by navigation marks; therefore, there are no difficulties in navigating a vessel along it when entering or leaving the port.

PILOTAGE: Compulsory. Navigational range marks, leading marks of Stanislov, Adjigolsky beacons, Verbchansky and Maliy Kasperovsky leading light buoys, and spar buoys. Master advises Port Controller and Inflot Agency ETA minimum of 96 hours prior notice.

Masters of vessels proceeding to the port of Kherson must advise ETA to the Harbour Master and Inflot Agency at the Port of Odessa 24 hours prior to arrival at the Vorontsov lighthouse. More precise time should be given 6 hours before approaching the lighthouse.

After having embarked a Pilot at the Vorontsov lighthouse, vessels proceed to the port of Kherson. Upon passing the Port of Odessa, Master should advise ETA to the local Inflot Agency at the port of Kherson.

ANCHORAGES: A part of the Dneiper river from the Northern border of the town of Kherson, nearly up to the Maly Potemkin Island, is considered as the Port of Kherson Roads.

The anchorage for foreign flag dry cargo vessels is situated in the area restricted by 2 imaginary lines of the leading marks located on the left bank of the Dnieper River, upwards from the mouth of the Konka River and lower of basin (creek) No. 2.

The recommended anchorage for foreign flag tankers is situated in the area stretching down the river from the oil piers towards leading line No. 7, South-westward of the upper leading marks clearing the place where a submarine cable is laid.

RESTRICTIONS: The permitted draft for passing through the channel is 7.8 m. but it may vary depending on weather conditions.

In the Summer the channel is open for navigation 24 hours a day.

Speed of vessels having draft over 5 m. should not exceed 10 knots whilst navigating through the channel.

There are no length restrictions for vessels entering the port.

Navigation through the channel in restricted visibility is strictly prohibited.

HEALTH: No automatic pratique.

RADIO: Ship-shore radio link can be established through the port radio station operating 24 hours on the following frequencies:

Call sign	*Frequencies (kHz)* *Working*	*Calling*	*Type of trans-mission*	*Time of work*
ICI	6430	6314.2	A1	HX
UHZ	500	500	A1	H24
"Kherson Radio"	2182	2182	A3	H24
"Mesyats" (CPR)**	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

**CPR – Central Port Radio Station.

A signal mast is located on the roof of the sea passenger terminal.

BERTHING: 9 berths, depths up to 8.4 m.

Mooring is effected with port Pilot assistance. Number of tugs required for mooring is determined by Pilot with Master's consent.

Cranes of up to 10 tons capacity are operated on the quays and by the warehouses. There are floating cranes with lifting capacity of up to 100 tons and other cargo handling equipment, intra-port transport included.

Berths of the port, with depths of up to 8.25 m. alongside are equipped to handle general and bulk cargoes (ore, chemicals, building materials), metals, grain, timber, cotton, cement, food products, etc., as well as passenger traffic. There are enclosed warehouses, a grain elevator and open concrete floor sheds.

TIDE: Changes in the water level observed in the port are due to the effect of the wind and variation in atmospheric pressure. The maximum range of the water level caused by winds may reach 2 m.

The changes of the water level due to variation in atmospheric pressure ("Seish" effect) are observed at times. They may last from a few minutes up to several days and may reach 0.58 m.

MEDICAL: Hospital facilities available.

FRESH WATER: Available alongside and by barge.

FUEL: Available.

OPENING/CLOSING HATCHES: Opening and closing of hatches is usually done by the ship's crew. It may also be done by port workers for vessel's account.

REPAIRS: Only minor repairs can be carried out. There are no dry docks in the port.

TIME: GMT plus 3 hours (all year round).

AUTHORITY: Port of Kherson Authority.

AGENT: The Port of Kherson Maritime Agency "Inflot". Postal address: The Sea Passenger Terminal, Port of Kherson, U.S.S.R. Cables "Inflot Kherson". Telex 273132. Tel: 29-13-51, 29-14-41.

KHOLMSK: 47.03 N. 142.03 E. (See Plan Book)

GENERAL: The seaport of Kholmsk is situated on the Western coast of Sakhalin Island, in the Tartarsky Strait of the Japan Sea and at the head of Nevelskoy Bay.

The port is open for navigation all the year round but starting from January up to the middle of March drift ice and sludge can appear in the harbour and on the coast line during Westerly winds making the navigation more complicated.

The outer roads of the port are bounded by an arc of 7 cables length radius, the centre of which is marked with a light located on the Southern mole of the Commercial Harbour.

The port is divided into 3 parts: The Kovsh (a basin), The Commercial and Fishing Harbours. The Commercial Harbour is situated in the centre of the port area. It is protected by the Southern and Northern moles. The entrance to the Harbour 150 m. wide, is situated between these 2 moles. Due to shoal water along the coast, there is not much space for vessels manoeuvrability in the Commercial Harbour. Cargo berths are situated in a basin (The Kovsh) of the Southern part of the Harbour.

The Port of Kholmsk, due to its position, size and weather conditions in the area, cannot be used as a sheltering port.

During Westerly and N.W'ly gales, particularly in the Autumn and Winter (October — March) the heavy sea swell penetrates into the Kovsh (mainly from the N.W.) causing the variable current with surge (the "Tvagun"). Due to this phenomena the stay in port is not safe therefore Masters of all vessels are recommended to leave the port for sea after having received a storm warning of a gale coming from Westerly or N.W. directions.

All vessels proceeding to the port of Kholmsk in the Autumn and/or Winter must have available on board a sufficiency of fuel, fresh water, provisions and strong manila ropes, be seaworthy in all respects, thus ensuring vessel's safety during a possible stay in the open sea roadstead.

In case there are no vacant berths in the port, vessels are not allowed to enter the harbour without prior permission.

It is also prohibited to enter the harbour after a storm warning has been received by vessel despite the fact that there are vacant berths in the port.

PILOTAGE: Pilot meets a vessel in the outer roads. In the event of bad weather, when Pilot is unable to come on board, vessel should follow in the wake of pilot boat.

ANCHORAGES: There are no anchorages protected from the wind in the Nevelskoy Bay.

During off-shore winds vessels may anchor in the outer roads situated opposite the port entrance. The outer roads are open to Westerly winds.

Masters should bear in mind that during the period of navigation fish nets are usually laid in the outer roads. The seaward side of the border of the fish nets, situated about 8 cables length off-shore, is usually marked by wooden buoys with flags.

Anchorage in the outer roads may also be obtained at 4 – 6 cables length off shore. Depths are from 18 m. to 20 m. Holding ground sand and stone.

A vessel should proceed to the anchorage along the leading line of the port of Kholmsk leading lights. At a distance of half a mile off the port entrance, a vessel should steer off the leading line at 2 – 3 cables length and then drop anchor.

The holding ground is better in the Southern part of the outer roads than in the Northern part.

When at anchor, a vessel may not approach the leading line closer than 1.5 cables length.

RESTRICTIONS: Vessels may enter the port at any time of day or night.

MAX. SIZE: The maximum permissible draft for entry to the port is 6 m. length – 100 m. Since depths in the channel may vary at times, the Port Authorities shall undertake to advise the Masters of incoming vessels accordingly.

RADIO: Ship-shore radio link can be established through the port radio-station Kholmsk Radio operating 24 hours a day on the following frequencies:'

Call sign	*Frequencies (kHz)* *Working*	*Calling*	*Type of trans-mission*	*Time of Work*
UHO	500	500	A1	H24
Kholmsk Radio	4361.6	4063	A3	HX
Kholmsk Radio	–	4066.1	A3	HX
	2182	2182	A3	H24
UQB Port	8675	8370	A1	H24
UQB	3605	4186	A1	H24
Kholmsk Radio "2" (Harbour Master)	156.8*	156.8*	F3	H24
Kholmsk Radio	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

The port signal station is situated at the Southern mole base. There is also a radar station in the port.

BERTHING: Berths with depths up to 8.5 m. alongside, are equipped to handle general and bulk cargoes, metals, timber, food products, etc., as well as passenger traffic.

Number of tugs required for assistance is usually agreed between Pilot and Master.

Cranes of up to 37 tons capacity are operated on the quays. There are also other cargo-handling equipment and intra-port transport facilities. There are enclosed warehouses and open concrete floor sheds.

FUEL: Not available.

FRESH WATER: Available.

REPAIRS: Only minor repairs can be carried out. There are no dry docks in the port.

TIDE: Changes in the water level are of small account. They are mainly due to the irregular diurnal tides. The maximum range of the water level observed is 0.4 m.

TIME: GMT plus 11 hours. (All year round).

AUTHORITY: The Port of Kholmsk Authority.

AGENT: The Port of Kholmsk Main Maritime Agency "Inflot". 6 Morskaya Street, Port of Kholmsk, Sakhalin Island 649620, U.S.S.R. Cables "Inflot Kholmsk". Tel. 22-86; 34-92.

KILIA: 45.26 N. 29.17 E. (See Plan Book)

GENERAL: The port of Kilia is situated on the left bank of the Kilia inlet of the Danube River, 47 km. from the estuary. The depths of the water within the port area vary from 3 m. up to 22 m. The holding ground is clay and mud. The season of navigation in the port area lasts from March till December depending on time when the Danube River is getting frozen over.

Sea-going vessels with the draft up to 7 m. are loaded/discharged with the use of buffer barges.

Berths of the port are equipped to handle general and bulk cargoes, metals and timber. There are open concrete floor sheds and a covered warehouse.

PILOTAGE: Carried out by the Pilot service of the port of Izmail.

ANCHORAGE: Allowed in the 48 km. post area, in 5 m. depths according to the Pilot's instructions.

RESTRICTIONS: Vessels can enter or leave the port at any time of day or night. Movement of vessels during fog is not allowed.

RADIO: Communication can be effected via the port radio station the "Kilia-Radio".

Call sign	*Frequencies (mHz) working*	*calling*	*Type of trans-missions*	*Time of work*	*Remarks*
UJM-3	—	—	A1	H8	Radio communication with the shore only
Kilia-Radio – 1	156.8	156.8	F3	H12	

Notice of arrival: Masters of vessels going to the port from the seaward via the Kilia inlet should advise the port of Izmail Harbour Master their ETA 24 hour prior to arrival at the Reception buoy area. More precise time of arrival should be advised at a later time.

TUGS: Approaching and shifting berth is performed without tug assistance.

BERTHING: The berth is equipped with 5 ton caterpillar cranes. There are also floating cranes, other cargo handling equipment and interport transport means.

FRESH WATER: Not available.

FUEL: Not available.

REPAIRS: Not possible.

TIME: GMT plus 3 hours all year round.

CONSULS: None.

AUTHORITY: The Port of Kilia Authority.

KLAIPEDA: 55.43 N. 21.07 E. (See Plan Book)

GENERAL: A Baltic seaport, Klaipeda is situated in a narrow strait called the Morskoi Canal, which connects the Kursky Gulf with the Baltic Sea.

The port of Klaipeda comprises the Morskoi Canal consisting of 2 harbours: the Zimnyaya and Zavodskaya, the Fishing Port and the Dane river quays situated by the roadway-bridge.

The Southern half of the Kurshsky Gulf and a part of the Dane river some distance up from the estuary become frozen over every Winter for quite a long time. A part of the port situated to the North of the Dane river mouth gets frozen over very seldom but the entrance to the Morskoi Canal may be packed by the drift ice in the course of a few days.

The port is open for navigation all the year round but in the Winter time ice will be managed with ice-strengthened tugs' assistance.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

APPROACHES: The width of the approaching channel to the port is 100 m. and depth 11.5 m. Depths of the channel at a distance of 400-600 m. from the entrance to the Sea Canal are subject to changes due to lots of sand and mud brought down from the Kursky Gulf by the Spring floods, in particular. The entrance to the Sea Canal is protected by the Northern and Southern moles.

The length of the fairway of the Morskoi Canal from the entrance up to the Secluma-Kyaules-Nugara shoal at the entrance to the Kursky Gulf is 4 miles, width varies from 180 m. to 300 m. and the depths are from 6 m. to 9 m. at the mean water level.

The permissible drafts for vessels navigating along the Morskoi Canal are as follows: Up to 7 m. from the canal entrance up to the Zimnyaya (Winter) harbour, but further up to the Fishing Port situated 1.5 miles to the South of the Dane River estuary – not more than 6.0 m. from the Fishing Port up to the Timber Harbour – not more than 5.0 m.

PILOTAGE: A Pilot boat usually meets a vessel at light buoy No. 7 (Lat. 55° 44′ N., Long. 21° 00′ E.). It carries the Pilot flag by day and lights prescribed for a Pilot boat by night.

Pilot's watch is kept 24 hours a day except in periods of dense fog and strong N.W. winds over Force 7 Beaufort Scale.

On the Harbour Master's decision agreed with the Master of a vessel the pilotage can be performed up to the entrance of the port with the assistance of the coastal radar station.

The Pilot station is situated between Oil Pier No. 1 and berth No. 15.

ANCHORAGE: A good anchorage can be obtained in the outer roads at receiving light buoy No. (55° 44′ N., 21° 00′ E.).

The outer roads are situated at a distance of 2 miles to W.N.W. from the entrance to the Morskoi (Sea) Canal. Depths are from 19 m.-23 m.

The holding ground is sand and clay. Anchorage in the outer roads is not safe during heavy seas caused by Westerly winds.

RESTRICTIONS: Day and night entrance. Max. permissible draft 8 m. Anchorage at inner roads limited to vessels under 100 m. length.

MAX. SIZE: Length and breadth unlimited. Max. permissible draft for all vessels entering the port, 9 m.; and for tankers loading at installations outside main port area, 10 m.

RADIO: Vessels can establish radio contact through the port radio station Klaipeda Radio operating 24 hours per day on the following frequencies:

Call sign	*Frequencies (kHz) Working*	*Calling*	*Type of trans-mission*	*Time of work*
UNM-2	500	500	A1	H24
	455	454	A1	H24
	4229	4183	A1	HX
	6427	6275.25	A1	HX
	8701	8370	A1	HX
	12703	12552	A1	HX
Klaipeda Radio	2182	2182	A3	H24
Klaipeda Radio (CPR)**	156.8*	156.8*	F3	H24
Dispatcher (Port Control)	156.8*	156.8*	F3	H24
Ocean (Pilot Service)	156.8*	156.8*	F3	H24
Neltegavan (Oil Harbour Port Control)	156.8*	156.8*	SRZ	

*Frequencies are given in mHz

**CPR – Central Port Radio station.

Vessels' traffic in the roads and harbours is controlled by the signals exhibited at the signal stations situated at the entrance to the port.

Storm signals are shown at the same stations and also at the Fishing Port signal station.

TUGS: Ordered by Pilot if necessary. Mooring and unmooring of large sea-going vessels can be effected with tugs' assistance only. Number of tugs to be ordered depends on the weather conditions and can be agreed upon between Master and Pilot. Master should order tugs by radio well in advance.

BERTHING: No specific requirements. Vessels allocated berth according kind of cargo to be loaded/discharged and their turn.

The quays of the port with depths alongside of up to 10.8 m. are equipped to handle general, bulk and liquid cargoes as well as passenger shipping. There are enclosed warehouses and concrete floor sheds.

Cranes of up to 40 tons capacity are operated along quayside and by warehouses. There are also other cargo handling facilities including a coal loading installation and floating cranes up to 50 ton capacity.

STEVEDORES: Report 48 hours, then 12 hours prior arrival giving ETA, and 72 hours then 12 hours prior arrival advising perishable goods, characteristics of vessel, gross capacity, number and measurement of hatches, tween-decks, shelter-decks, description and quantity of cargo, stowage plan, heavy lifts, pieces of above 3 tons each especially indicated. Day and night loading/discharging operation, Sundays and holidays included.

MEDICAL: Master to advise by radio prior arrival if medical attendance required on board.

TANKERS: Three berths. Max. draft 9 m. Shore facilities for discharge of ballast.

FRESH WATER: Most berths supply by shore installations, otherwise barge.

FUEL: Deliveries only by bunker barge.

GANGWAY/DECK WATCHMEN: Compulsory for gangway checking. Guard net and life buoy required.

OPENING/CLOSING HATCHES: Normally by crew.

CONSULS: No Consuls at Klaipeda.

REPATRIATION: No facilities for crew changes. Arranging any necessary repatriation at Captain's request effected by Immigration Authorities.

AIRPORT: At Palanga (25 km. from Klaipeda), served by regular lines; Palanga-Moscow, Palanga-Leningrad, Palanga-Riga. Airport at Klaipeda – some regular flights per day: Klaipeda-Vilnius, Klaipeda-Kaunas, Klaipeda-Kaliningrad.

POLICE/AMBULANCE/FIRE: Tel. Police, 02; Ambulance, 03; Fire, 01.

GENERAL: In case of stormy weather or dense fog vessels are lying at Outer Roads until entering permitted by Harbour Master. In such cases vessels lying alongside berth to be shifted to Inner Road.

CERTIFICATES: All ship certificates required on every call.

CUSTOMS ALLOWANCE: Cigarettes and wine/spirits on board limited by personal requirements; take ashore max. 2 packets cigarettes, no wine/spirits.

REPAIRS: All kinds of repairs for vessels of 10,000 d.w.t. can be effected.

TIME: GMT plus 3 hours. (All year round).

TIDE: There are periodical alterations in the water level, chiefly due to the effects of the wind. In general, strong Westerly, Northerly, N.W. and sometimes S.W. winds raise the water and Southerly and Easterly winds lower it.

The water level usually begins to rise suddenly. It rises very quickly but lasts for a very short period of time. The max. difference between high and low level is usually observed in Autumn and Winter.

Sometimes the changes in the water level can be caused by the considerable variation in atmospheric pressure ("Seish" effect).

TELEPHONES: May be arranged on board.

SHORE LEAVE: Crew members allowed ashore with shore-pass obtainable from Immigration Authorities.

AUTHORITY: The Port of Klaipeda Authority.

AGENTS: "Inflot" Agency. Address: Klaipeda 235801, ul. Platchioy 18. Tel. 6-42-70, 6-32-36. Cables: Inflot, Klaipeda. Telex: 179 and 159.

LENINGRAD: 59.56 N. 30.18 E. (See Plan Book)

GENERAL: A Baltic Sea port, Leningrad is situated on the islands of the Neva Delta, at the head of the Nevskaya Guba (Neva Bay), in the Eastern extremity of the Gulf of Finland. Year-round navigation is possible with ice-breaker assistance from the end of November until middle of April. Ice first begins to form in the middle of November, when usual Winter frosts come, and in January (time varies with the season) all the area becomes completely covered with fast ice.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

APPROACHES: The Kronstadt Korabelny Farvater (Kronstadt Ship's Channel) which is about 12 miles in length, extends from the port of Leningrad Entrance light buoy to the Leningrad Morskoi Canal, which is about 15 miles in length, and leads to the entrance of the sea commercial port of Leningrad. The least bottom width of about 80 m. is in the part of the Canal which is protected by 2 dams (moles).

PILOTAGE: Pilots usually board and disembark vessels at the port of Leningrad approaching light buoy (Lat. 60° 02′ N., Long. 29° 26′ E.). In case of bad weather a vessel should follow the Pilot boat up to the Kronstadt roads where a Pilot will come aboard the ship.

ANCHORAGE: Vessels approaching the port from seaward should take anchorage off the port of Leningrad Entrance light buoy. The depths in the roads are between 20–25 m. and the holding ground is mud and sand.

RESTRICTIONS: No restrictions on night entry, no tide in Leningrad. Vessels with drafts 8.5 m. and more, and length 170 m. and more, must be towed when proceeding in the Leningrad Morskoi Channel from the Lesnoi Mole Roads (Timber Mole Roads) up to the Neva Gates.

All vessels navigating within the port must keep strictly to the following regulations:

(a) Vessel's speed should not exceed 10 knots when navigating in the Kronstadt Korabelny Farvater and in the open part of the Leningrad Morskoi Canal (from the entrance up to the moles).

(b) When navigating in the channel between the moles of the Leningrad Morskoi Canal as well as in the Bolshaya Neva river from the Neva Gates up to Lieutenant Schmidt bridge and also in the Ekateringofka river, vessels speed should not exceed 6 knots.

(c) In the inner roads and in the port harbours, Masters should navigate with a speed ensuring the safety of vessel but never exceeding 6 knots.

MAX. SIZE: Draft restriction 10.5 m. No restrictions as to the length of a vessel.

HEALTH: Master coming from foreign port shall report every sick passenger or crewman; Health Authorities board together with Customs and Immigration and if find all in order grant free pratique. Each vessel shall produce Deratisation Certificate and Sanitary Patent.

RADIO: Cable Agent "Inflot" ETA, draft and other data, information required via Leningrad Radio Station. All vessels when approaching the port of Leningrad should establish radio contact via the coastal Leningrad Radio station operating 24 hours a day on the following frequencies:

Call sign	*Frequencies (kHz)* *Working*	*Calling*	*Type of trans-mission*	*Time of work*
UDB	500	500	A1	H24
	484	480	A1	H24
URD	6,425	6,273	A1	H24
	8,687.6	8,365		
	12,693	12,546		
Leningrad-Radio	13,175.5	12,396.5	A3	HX
Leningrad-Radio	2,182	2,182	A3H	H24
Leningrad-Radio	8,767	—	A3A	HX
Leningrad-Radio	—	8,236.4	A3A	HX
Leningrad-Radio 1–5 (Port Control via CPR**)	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

**CPR – Central Port Radio Station.

Port radar station gives all possible information to any vessel navigating in the Kronstadt Korabelny Farvater and Leningradsky Morskoi Canal during restricted visibility, from the Leningrad entrance light buoy (Lat. 60° 02′ N., Long. 29° 26′ E.) up to the dams (moles) of the Leningrad Morskoi Canal. Navigation is usually controlled by a Pilot on board the vessel.

Signals regulating vessels traffic in the harbour gates, called the Nevskie Vorota (Neva Gates), as well as signals indicating that the Leningrad Morskoi Canal is closed for Westward bound traffic are hoisted at the Commercial port signal mast situated on Kanonersky Island, at the Western side of the Neva Gates. Storm signals are shown at the same mast.

Signals for vessels approaching the entrance to the Commercial port of Leningrad from seaward are hoisted at the pilot vessel.

Traffic prohibition signals, when the pilot vessel is absent from her usual position may be exhibited at a vessel specially designated for this purpose.

TUGS: Normally join incoming vessels at Inner Road. Ships lines usually used.

The number of tugs a Master should order for inward and outward towage as well as for shifting berths in the harbour depends on Pilot's advice.

BERTHING: Berths of the port, with depths alongside of up to 11.5 m. are equipped to handle general and bulk cargoes (coal, ores, grain, building material), sugar, metals, timber products, etc. There is also a passenger and container terminal, warehouses, cold stores and concrete floor sheds.

Opening and closing of hatches is usually done by the ship's crew, otherwise according to the charter party conditions.

The port of Leningrad is equipped with modern cargo-handling facilities. There are floating, container handling, fixed and mobile shore cranes, an elevator, fork lifts and other mechanical equipment.

TIDE: Considerable rises of water level may be caused by strong Westerly winds – and falls by Easterly winds. Usually the changes in water level are greater during the Autumn and Winter months. During Autumn and Winter the range of level may reach 1.2 m. from the mean water level and sometimes even more.

During Spring and Summer it is never more than 0.5 m. The greatest rises in the water level are observed in the Neva Bay. The extreme difference in level between the maximum rise and the minimum fall of these seasonal changes observed is about 3.5 m. At the mouth of the Neva river the greatest changes in the water level are caused by the S.W. Autumn gales. The difference in level usually reaches 0.2 m. – 0.3 m. and only sometimes up to 1 m.

STEVEDORES: Ordered by Agent.

RADAR: Pilot in contact with radar service.

MEDICAL: Masters to advise Agent prior arrival if medical attendance required aboard.

DENSITY: Fresh water in port area.

FRESH WATER: Most berths supplied by shore installations, otherwise barges.

FUEL: Bunkers available, usually delivered by lighters.

FIRE PRECAUTIONS: No smoking allowed in port area, except in places specially allocated.

GANGWAY/DECK WATCHMEN: Not compulsory.

OPENING/CLOSING HATCHES: According to charter party.

CERTIFICATES:

Passenger Ship Safety.
Safety Equipment.
Safety Radiotelephony.
Safety Radiotelegraphy.
Exemption certificate.

CUSTOMS ALLOWANCE: No restrictions on board.

IDENTIFICATION CARDS: Needed, will be given on arrival.

CONSULS: The Consulates of Czechoslovak Socialist Republic, German Democratic Republic, German Federal Republic, Iran, Japan, Polish People's Republic, People's Republic of Bulgaria, Republic of Cuba, Sweden and United States of America are situated in Leningrad.

REPAIRS: All types of repairs for vessels of up to 10,000 d.w.t. can be carried out in the port.

DRY DOCKS: Available.

TIME: GMT plus 3 hours, no alterations during year.

POLICE/FIRE/AMBULANCE: Police 9692; First-Aid from Port 503; from Town 03; Port Fire 8509, 8536, 8973; Town Fire 01.

AUTHORITY: Port of Leningrad Authority.

AGENT: Main Maritime Agency "Inflot". Postal address: 1 Gapsalskaya Str., Leningrad 198035, U.S.S.R. Tel.: 251-12-38; 251-28-77; 216-99-77. Telex: 505, 506.

MEZEN: 65.50 N. 44.04 E.

GENERAL: A commercial seaport, Mezen is situated at a distance of 22 miles to the South of the mouth of the Mezen river flowing into the head of the Gulf of Mezen, in the White Sea.

The port area is bounded on the North by a line connecting the Ryabinov and the Nerpinsky points and on the South by the parallel of 65° 50′ N., Northward of the town of Mezen. The anchorage at the Kuloi river mouth is also included at the port of Mezen area.

Drift ice in the Gulf of Mezen appears in the first half of November. By the middle of February the Bay becomes completely frozen over. Ice finally disappears in the first half of May.

The port is open for navigation about 5 months of the year, starting from the end of May or beginning of June.

Ice-breaker assistance cannot be effected in the outer roads in the event of fast ice.

Tidal streams are observed in the Mezen river. The tide is semi-diurnal with two high waters and two low waters a day.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Compulsory. A Pilot meets a vessel at an anchorage buoy, at the Mezen river bar (Lat. 66° 12′ N., Long. 44° 04′ E.), at a distance of 22 miles off the port of Mezen. In the event of bad weather a Pilot at his discretion, may board a vessel in the outer roads.

Pilotage cannot be effected at night.

A Pilot cannot board a vessel earlier than 2 hours before the high water in the Semzha river, and a vessel may be piloted into the port not later than 1 hour before the water in the river reaches its high level.

Pilots do not board vessels in rough water (if the wind is over Force 6 Beaufort scale).

In case Pilot cannot embark a vessel in the outer roads, Master should follow in the wake of pilot boat up to Tolstic Point (Lat. 66° 04′ N., Long. 44° 05′ E.) where a Pilot will board ship. After leaving the port Master should disembark Pilot on to pilot boat at Tolstic Point and then follow it up to the outer roads of the port of Mezen.

ANCHORAGE: Anchorage can be obtained in the outer roads and in certain places of the Mezen river situated between the outer roads and the Kamenka settlement.

The outer roads are situated at the Mezen river mouth. They are bounded on the South by a line connecting the Ryabinov and the Maslyany Points.

Vessels in the outer roads are subject to effects of the N.W. and N.E. winds and heavy waves caused by them. The depths in the outer roads are about 7 m. The holding ground is sand, mud and rocks. Anchorage can be obtained in the inner roads with depths at low water of up to 4.5 m. – 5 m. (length of area is 1.5 mile and width up to 150 m.).

The inner roads are situated opposite the Kamenka settlement. A good anchorage can be obtained there by two vessels simultaneously. The anchorage at Burnovsky Point with depths from 4.5 m. – 5.5 m. can be used by two loaded vessels drawing up to 4.2 m.

RESTRICTIONS: Vessels may enter port only in daytime on high water. Masters have to pay full attention to Pilot's advice as river has varying bends.

MAX. SIZE: The permitted draft for the entry to the port is announced monthly by the Port Authorities. It should not exceed 3.9 m. – 4.2 m. The maximum permitted length is 70 m.

HEALTH: As for "Archangel".

RADIO: Vessels can establish radio contact through the port radio station Mezen Radio operating 24 hours a day on the following frequencies:

Call sign	*Working*	*Calling*	*Type of transmission*	*Time*
UZT	500 kc/s	500 kc/s	A1	HX
Dispatcher (Port Control)	160.65 mc/s	156.80 mc/s	F3	H24
Port (Harbour Master's Office)	156.70 mc/s	156.80 mc/s	F3	HX

BERTHING: The floating dams are used as mooring berths in the port. The depths alongside at low water are about 3.5 m. Vessels drawing 3.9 m. – 4.2 m. are usually grounded while loading at low water.

The port of Mezen specialises in timber exports but other cargoes are also handled at berths. Covered warehouses and open concrete floor sheds are available.

Tug assistance for mooring berths is not compulsory. Berthing is usually done in the daytime. Tugs, if necessary are ordered by Master according to the Pilot's instructions.

Rendering of Notice of Readiness and opening and closing of hatches are usually done in accordance with the "Soviet Wood" charter party.

Loading of timber is done by ship's winches.

TIDE: The difference between two successive high waters and low waters is small but the range of the tide changes considerably. At the Kamenka settlement the mean range of the tide is 2.8 m. and the mean range of the spring tide is 3.1 m. At the Semzha river the mean range of the spring tide reaches 7.7 m. Everywhere in the Gulf of Mezen the differences in the duration of falling and of rising water are big and in some places of the Gulf of Mezen they may reach 5 hours.

Considerable changes in the water level are observed in the Spring. They are usually caused by the seasonal increase in the amount of water (due to melting snow) brought down by the rivers.

REPAIRS: Only minor repairs can be effected. There are no dry docks in the port.

FUEL: Supplies not guaranteed.

FRESH WATER: Fresh water can be supplied from the berths.

TIME: GMT plus 3 hours (all year round).

AUTHORITY: The Port of Mezen Authority.

AGENT: A branch of the Port of Archangel Main Maritime Agency "Inflot" at the Port of Mezen.

Port – "Inflot", Kamenka Settlement, 164650-Mezen, Archangel region, U.S.S.R. Cables "Inflot Mezen-Kamenka". Tel. The timber mill exchange – "Inflot".

MURMANSK: 69.00 N. 33.03 E. (See Plan Book)

GENERAL: A Barents Commercial Seaport and Fishing Port, Murmansk, is situated at the Eastern coast of the Southern elbow-shaped bend of the Gulf of Kolsky, between the Zeleny (Green) and Khaldeev Points. It is the last unfrozen port of the Northern seas route.

In very severe Winters the Southern and middle elbow-shaped bends of the Gulf get frozen over for a short period of time in February or March, during calm and frosty weather. In mild Winters drift ice is observed. The Northern part of the Gulf never gets frozen over. The port of Murmansk is open for navigation all the year round. In the event of ice conditions in the Gulf of Kolsky, ice-breaker assistance will be effected in compliance with the Harbour regulations in force.

The port area occupies nearly all Southern elbow-shaped bend of the Gulf of Kolsky. The port of Murmansk consists of 2 harbours: the Commercial and the Fishing Harbours. The Commercial Harbour is divided into 4 areas: The Rudny (Ore), The Ugolny (Coal), The Central, and Passenger Terminal.

The Fishing Port extends to the South of the Passenger Terminal.

DOCUMENTS: Also refer to beginning of U.S.S.R. section.

Muster roll, 6 copies (IMCO form)
Crew List, 2 copies (IMCO form)
Passenger List, 6 copies (IMCO form)
General declaration, 5 copies (IMCO form)
Cargo Manifest, 2 copies (IMCO form)

PILOTAGE: Compulsory. Pilot station is situated at Tuva-Goobay in Kilsky Bay, position 69° 11′ 09″ N., 33° 34′ 08″ E. ETA to be given to Agents 96, 48, 24 and 12 hours before arrival. It is vital that ETA be sent thus if vessel is to obtain the services of a Pilot. Pilot launch is distinguished by word "Pilot" in black letters on both sides. Pilots can be contacted on VHF Channel 16. Every vessel should drift whilst waiting for Pilot since depths in the Pilot station are too big to permit anchorage.

During rough sea Pilot is not able to board a ship at the Pilot station area. In this event vessel should follow the Pilot boat in the wake of it up to the Salny Island and embark a Pilot Southward of the Island at a place indicated by Pilot boat.

ANCHORAGE: At the Pilot station depths are too great to permit anchorage, but there is sufficient sea room for vessel to await Pilot with engines stopped. Anchorage with depths from 20 m.–35 m. is situated in the Southern elbow-shaped bend of the Gulf of Kolsky, Westward of the Kievaraksky leading line (the port outer roads). The holding ground is good.

Every vessel waiting for mooring berth should anchor Westward of the Kievaraskky leading line but not obstructing other vessels' traffic.

It is strictly prohibited to lie at anchor Eastward of the Kievaraksky leading line. If, in case of emergency, a Master has to lie at anchor in the prohibited area, he should immediately report the fact to the Harbour Master of the Commercial port of Murmansk.

RESTRICTIONS: Vessels can enter the inner roads of the port at any time of day or night.

The speed of vessels navigating within the limits of the Gulf of Kolsky is restricted by the following limits:

(a) It shall not exceed 12 knots in the area bounded by the parallels of the Letinsky Point and the Northern side of the Salny Island.

(b) It shall not exceed 10 knots in the area bounded by the parallels of the Northern side of the Salny Island and Pinagory Point.

(c) It shall not exceed 6 knots in the area Southward of Pinagory Point.

MAX. SIZE: Vessels up to 39 ft. max. draft for berthing.

HEALTH: International quarantine signals to be used on arrival. No later than 6 hours before arrival at the inner area Master should radio Agents giving full details of state of health on board, and requesting pratique which will be given on arrival.

RADIO: Murmansk Radio operating 24 hours on 2182 kHz. Coastal radio station UMN operating 24 hours on 500 and 472 kHz. Coastal radio station UMV operating 24 hours on 13080 kHz.

Radio contact can be established through the port radio station Murmansk Radio, operating 24 hours a day on the following frequencies:

Call sign	*Working*	*Calling*	*Type of transmission*	*Time*
UMN	500 472	500 468	A1	H24
UMV	12,730	12,555	A1	H24
UMV	6,400 8,690 *1660	6,274.5 8,368 16,716	A1	HX
Murmansk-Radio	2,182	2,182	A3	H24
Murmansk-Radio	8,757.6	—	A3H	HX
Rascat (Radar & Pilot Service)	161.50 mc/s	156.90 mc/s	F3	H24
	161.70 mc/s	157.10 mc/s	F3	H24
Port (CPR)* (Pilot Service)	160.95 mc/s	156.35 mc/s	F3	
	161.90 mc/s	157.30 mc/s		
	161.95 mc/s	157.35 mc/s		
"Inflot" (Shipping Agency)	156.70 mc/s	156.70 mc/s	F3	

*CPR – Central Port Radio Station

The pilot service operates through the "Port" (CPR) and "Rascat" (CPR) – Central Port Radio Station.

Radar/VHF link:

In the South circular bay, movement of all vessels is severely controlled by coastal radio station "RASCAT" (VHF Channel 18). All vessels under way must make contact with BRLC and carry out the recommendations received.

All vessels when at anchor or navigating in the Gulf of Kolsky must keep constant radio watch.

The port radar station gives all possible information to any vessel navigating in the Gulf in the restricted visibility. Radar navigation is usually controlled by a Pilot on board a vessel.

Storm predictions are transmitted on Channel 16 VHF for vessels in the vicinity. Vessels at moorings are warned through the Agent "Inflot".

Notice of Arrival: Every foreign vessel on approaching the Gulf of Kolsky must ask for entry permission into the Gulf from the Toros Island signal station by exhibiting her International Code letters by day and at night her call sign should be made in Morse code by searchlight.

VHF: Port VHF maintains contact between Pilots and ship within harbour limits, and between ship and shore. Calling on Channel 16 working channel will be according to instructions from shore.

TUGS: Normally join vessel in the inner area of the port. Tug's lines are used.

BERTHING: Main berths, depth alongside 32 ft. at low water. Average height of tide about 3.9 m. Vessels berth port or starboard side alongside at Master's and Pilot's discretion. The berths of the Commercial Harbour with depths alongside of up to 10.5 m. are equipped to handle general and bulk cargoes, metals, machinery, chemicals, foodstuff, etc.

There are enclosed mechanised warehouses for apatite including open concrete floor sheds.

It is prohibited to approach a berth without sounding a prolonged blast of the whistle. Same signal should be sounded when leaving an outer berth and the inner basin, as well as when passing a vessel lying at anchor in the outer roads.

Berths of the port are equipped with mobile electric cranes of up to 40 tons capacity. There are floating cranes with lifting capacity of up to 90 tons, and other cargo handling equipment and intra-port transport. Since loading/unloading is usually done by the port cranes, there are no specific requirements to vessels cargo gear.

STEVEDORES: Arranged by Agent on basis of Masters ETA. Loading and unloading is carried on throughout 24 hours a day including holidays.

MEDICAL: Hospital and medical facilities available. Vaccination can be arranged. If doctor required on board Master should inform Agents by radio or VHF.

DENSITY: At the berth varies between 1006 and 1025.

FRESH WATER: Available from most berths, otherwise supplied by barge. To avoid delay recommended to order before arrival.

FUEL: All grades available. Delivered by barge. Advance notice required.

DEVELOPMENTS: Reconstruction is being carried out in order to speed up loading of iron-ore and other cargoes.

GANGWAY/DECK WATCHMEN: Not obligatory.

OPENING/CLOSING HATCHES: Usually performed by ship's crew.

CERTIFICATES: At first Russian port of call certificates of tonnage and those required by International Convention will be required for examination.

CUSTOMS ALLOWANCE: No restrictions on crew's consumption of tobacco and alcohol on board. It is forbidden to take these items ashore.

CONSULS: There is no local representation.

REPAIRS: All kinds of repairs can be carried out for vessels of up to 40,000 dwt.

DRY DOCKS: Large dock; length 173 m., width 45 m. Small dock; length 141 m. width 30 m.

TIDE: Changes of the water level in the Gulf are due to the tides. The tide is semi-diurnal with two high waters and two low waters a day. The difference in time of high and low water is about 6 hours. The range of the tide at mean neap is about 2.4 m. and at mean spring 4.5 m. The extreme range of water level is usually observed during the Autumn months and the lowest during Spring.

TIME: GMT plus 3 hours.

TELEPHONES: Ambulance, tel. 003, 395 and 422; Fire service, tel. 252 and 524.

AUTHORITY: Murmansk Sea Trade Port.

AGENT: The Port of Murmansk Main Maritime Agency "Inflot", 19 The Port Settlement, Murmansk 24, U.S.S.R. Cables "Inflot Murmansk". Tel. 2-56-66; 2-51-97. Telex 128.

NAKHODKA: 42.47 N. 132.52 E. (See Plan Book)

GENERAL: A commercial port, Nakhodka is situated in Nakhodka Bay, in the N.W. part of the Japan Sea.

Sometimes America Bay is covered with sludge which is frequently driven out by winds into the sea.

From the beginning of January to March the Nakhodka Bay is usually covered with thin ice which can easily be broken by vessels and driven out into the sea by favourable winds.

The port is open for navigation all the year round.

Changes of the water level in the Nakhodka Bay are of small account but the rise of the water level caused by strong Southerly winds blowing for considerable periods of time, may reach quite a high level.

The Northern part of the Nakhodka Bay from the entrance up to the line connecting the Lindgolm and Basnin Points is occupied by the Commercial port. The fishing port is situated Southward of this line.

The most dangerous wind for vessels lying in the Nakhodka Bay is the strong Southern wind of long duration caused by typhoons. The wind usually gives rise to the water level and produces waves of up to 3 m. height in the Bay.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Pilotage in the port of Nakhodka is compulsory for all vessels irrespective of nationality and ownership with the exception of the local coasters.

Foreign vessels proceeding to the port from the seaward should first make course to the approaching point, Lat. 42° 27′ 2″ N., Long. 132° 57′ E. All vessels are recommended to approach this point by following the course 350.5° within the 1-2 mile wide traffic lane leaving the traffic separation zone on the port side.

From the approaching point a vessel should follow the course 000° for 8.2 miles within the 1 mile wide traffic lane leaving the traffic separation line on the port side at the entrance to the area of the "circular motion".

After having entered this area a vessel should steer anti-clockwise within the 2 mile wide traffic lane. Upon leaving the area of the "circular motion" a vessel should keep on the Vkhodnoi leading line of the lighthouses of the Nakhodka Bay and follow this course up to area No. 176 (the quarantine anchorage and the Pilot boarding area).

Vessels approaching the Novitsky Bay should follow the Vkhodnoi leading line up to area No. 177 (the Quarantine anchorage).

Foreign vessels leaving the port of Nakhodka and/or the Novitsky Bay should follow the opposite course. After having entered the area of the "circular motion" vessels should steer anti-clockwise in the 2 mile wide traffic lane.

Having left this area a vessel should follow course 180° steering 8.2 miles within the 1 mile wide traffic lane leaving the traffic separation line on the port side, she should then turn and follow the course 190.5° within the 1-2 mile wide traffic lane up to the exit point of the traffic separation area leaving the separation zone on her port side.

To avoid damage to a vessel and/or any port installation vessels should be moored/unmoored by the method of parallel mooring (unmooring) with tug assistance.

Being at 10 m. distance from a berth a vessel is allowed to use her main engine in case of emergency only.

ANCHORAGE: A safe anchorage can be obtained in the area "A" with depths from 13.0 m. – 20.0 m. and in the anchorage "D" area with depths from 18.0 m. – 28.0 m. The holding ground in both anchorages is mud, sand, sand with mud, stone.

The "A" area is a quarantine anchorage which serves as the Pilots' boarding place and an anchorage for deep sea-going vessels over 3,000 d.w.t.

The "D" anchorage area (No. 177) is an anchorage for tankers proceeding to the oil port situated in the Novitsky Bay. Boundaries of the anchorages are shown on the chart.

To lie at anchor in the Nakhodka Bay, in the fairway and in the dredged harbours, except in emergency, is strictly prohibited.

RESTRICTIONS: Vessels can enter or leave the port at any time of day and night. There are no size restrictions for entry to the port, except for vessels having the maximum permitted draft.

Anchorage for tankers is allowed only in the "D" area (area No. 177).

MAX. SIZE: The permitted draft for vessels proceeding to the Commercial port is 9.7 m., 9 m. for the Fishing port and 8.6 m. for the Passenger Terminal.

Vessels drawing over the permitted draft must obtain Harbour Master's permission prior to entry to the port.

HEALTH: Advise "Inflot" by radio in advance if there is any case of quarantine illness on board the ship. Smallpox vaccination is compulsory for all crew members. If vessel is arriving from a cholera area, then cholera inoculations are also required.

RADIO: Radio communication can be effected via the radio station of the Primorsk Shipping Company – "Nakhodka-Radio" some data of which is given in the table below.

	Frequencies (kHz)		*Type of*	
Call sign	*Working*	*Calling*	*trans-mission*	*Time of work*
UKI	500	500	A1	H24
UKK—3	8510	8448	A1	
	12990	12627	A1	HX
"Port—5"	156.8*	156.8*	F3	HX
"Lotos" (Port Control)	156.8*	156.8*	F3	H24
"Golos—1" (Port Service & Pilot Watch)	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

The traffic and storm signals are exhibited at the Signal Station situated 2.5 cables Westward of Shefner Point.

TUGS: Tug and mooring launch assistance available. Tugs join the vessel in America Bay as directed by Master or Pilot. Ship's tow lines are used.

BERTHING: May be effected at any time of day or night. In daytime vessels mooring position will be marked by a flag and at night by a red lantern. These signals mark the point where the ship's bow should be at the mooring.

The berths of cargo handling port area No. 1 have depths alongside from 8.6 m. up to 10.2 m. and are equipped to handle potassium salt, grain, equipment, cables, wire ropes, metals, phosphorus, etc.

The berths of cargo handling port area No. 2 have depths alongside from 9.5 m. up to 10.2 m. and are equipped to handle grain, coal, cement, foodstuff and general cargoes.

The berths of cargo handling port area No. 3 have depths alongside from 8.8 m. up to 11.8 m. and are equipped to handle timber, sawn timber, 20 ft. and 40 ft. ISO containers, equipment, machinery and other cargoes.

Passenger vessels are handled at two berths with depths alongside 8.8 m. and 6.1 m.

Electric cranes of up to 41 tons capacity are operated on the quays. There are also floating cranes with lifting capacity of up to 300 tons and other cargo handling equipment, intra-port transport included.

Loading and/or unloading is usually done in accordance with conditions and rates stipulated by Charter Parties and Sales Contracts.

STEVEDORES: Arranged through "Inflot".

MEDICAL: Medical service is free. All requirements should be ordered in advance through "Inflot".

FRESH WATER: Can be supplied at the berth or by barge.

FUEL: Available.

TANKERS: Slop reception facilities are available.

DEVELOPMENTS: Constructing new port at Urangel, 8 miles from Nakhodka, having: Coal pier, annual capacity 10 million tons. Coal conveyor, annual capacity 5 million tons. Wood chip conveyor system, annual capacity 800,000 tons. Container system.

OPENING/CLOSING HATCHES: Can be carried out by stevedores.

CUSTOMS ALLOWANCE: No restrictions on tobacco and alcohol on board ship. Only tobacco required for personal consumption may be taken ashore.

CONSULS: North Korea, tel. 55310. Japan, tel. 56360.

WIND: The most dangerous wind for vessels lying in Nakhodka Bay is the strong Southern wind of long duration caused by typhoons. The wind usually gives rise to water level and sends heavy waves of up to 4 m. height into the Bay.

REPAIRS: All kinds of repairs for vessels of up to 25,000 dwt. can be carried out.

REPATRIATION: Can be arranged during the Summer months provided passport and documentation in order. During Winter months there are no facilities for foreigners to reach nearest international airport so repatriation is only possible via infrequent passenger ships to Japan.

AIRPORT: Nearest international airport is at Khabarovsk, 1,000 kilometres away. Vladivostok is now closed to foreigners or international traffic, though sometimes used for air freight.

TIME: GMT plus 10 hours all the year round.

SHORE LEAVE: Permitted subject to police control.

AUTHORITY: The Port Authority of Nakhodka.

AGENT: The Far Eastern Main Maritime Agency: "Inflot". Postal address: 692900 USSR Primorski Kray, Nakhodka, ul Leninskaia 2. Telegraphic address: Inflot Nakhodka. Telephones: 5–62–33, 5–61–55.

NARYAN-MAR: 67.38 N. 53.00 E.

GENERAL: A commercial port, Naryan-Mar is situated in the S.E. part of the Barents Sea, at a distance of 70 miles from the Pechora river mouth on the right bank of the Gorodetsky Shar Creek.

The port is open for navigation for a period of 100-110 days in the year.

In the Pechora river inlet first ice usually begins to form between 20th and 25th October, but sometimes appears at the beginning of the month.

The inlet becomes completely frozen over at the middle of December. Ice finally disappears at the end of June or sometimes beginning of July. Changes in the water level in the Pechora Inlet, due to melting of ice in Spring, have not been observed.

The formation of ice in the rivers flowing into the Pechora Inlet usually depends upon the time of the appearance of ice in the Inlet itself. Rivers, as a rule, become frozen over by the middle of October. The ice in the rivers usually breaks up earlier than it finally disappears in the Pechora Inlet.

The Pechora river at the Kuya settlement area becomes frozen over at the end of October, and the ice there finally disappears by the end of May.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Compulsory. Besides information stipulated in Soviet Wood Charter Party, vessels approaching pilot buoy may contact Port Authorities or Pilot in first fifteen minutes of any odd hour from 0700 till 2300 hrs. (Moscow time), frequency 2182 kc/s. Signals for Pilot to be given in accordance with International Code. Pilot boat wooden, standard type, white painted, with word "Pilot" in black letters on wheel-house. Pilot usually boards vessel at the Pilot Anchorage light buoy (lat. 68° 30′ N., Long. 54° 32′ E.). In case of bad weather, and in extraordinary circumstances Pilot shall embark vessel in the Srednevskie Islands area. In this event a vessel approaching the port from seaward should follow pilot boat in the wake of it, up to the Srednevskie Islands leading line where Pilot will be able to board ship.

Master of a vessel proceeding to the port of Naryan-Mar should order a Pilot through the Harbour Master 24 hours prior to arrival at the Pilot Anchorage light buoy and advise more precise ETA not later than 4 hours before approaching it.

Master should order Pilot not later than 2 hours prior to shifting berth and/or leaving the port.

ANCHORAGE: A recommended anchorage for foreign vessels is situated in the area with the central point 68° 30′ N., 54° 33′ E. The depths in the anchorage are from 5.4 m. — 6.6 m. Also Inner Roads where anchorage will be indicated by Pilot.

An anchorage can be obtained at the right bank of the Pechora river off Urpinsky leading line No. 24. Depths are from 4 m. — 17 m. The bottom is sand and mud.

Good anchorages with depths from 5 m — 10 m. can also be obtained opposite Zakhrebetny Bay and N.E. of the town of Naryan-Mar.

All vessels arriving from abroad or leaving the port for abroad, must anchor opposite Zakhrebetny Bay for the performance of port formalities.

RESTRICTIONS: Vessels can enter or leave the port at any time of day or night.

The permitted draft for entry to the port is about 4.5 m. but it is usually advised by the Port Authorities at the beginning of navigation. The maximum permitted length of a vessel is 110 m.

The entrance to the port is by the fairway leading from the Pilot Anchorage light buoy across the Pechora river bar.

The bar itself is the extensive shoal water area extending Northward of the Bolvansky Nos. Point. Three channels are dredged across the bar: The Receiving Channel, the Bar Channel and the Povorotny Channel. The last one serves as turning-point from the Receiving Channel into the Bar Channel. Vessels drawing not more than 4.9 m. can pass across the bar only at high water level.

It is prohibited to enter or leave the port through the Bar Channel and/or Receiving Channel as well as to navigate in the port area during dense fog, heavy rain and snow falls, strong winds of over Force 6 and absence of floating marks.

With the appearance of ice in the Pechora Inlet and in the Pechora river, entry to the port is not allowed without Harbour Master's permission.

The speed of a vessel navigating from the Pilot Anchorage light buoy through the Receiving Bar Turning, Alekseevsky, Polovsky, Kuisky, Urpinsky and other Channels shall not exceed 6 knots, with the exception at the part of the Pechora river between the Zakhrebetny and Srednevsky Channels where it is allowed to navigate with speed not exceeding 12 knots.

When passing floating cranes nearby, lighters and vessels lying alongside the port quays, every ship should proceed at dead slow speed.

MAX. SIZE: Draft declared by Port Authorities after being checked in the beginning of the season, and is about 15 feet.

HEALTH: Vessels inspected by sanitary officer. If no diseases, vessel obtains free pratique. Pratique automatic when vessel arrives from another Russian port.

RADIO: Naryan-Mar Radio.

	Frequencies (kHz)		*Type of trans-*	*Time of*	
Call sign	*working*	*calling*	*mission*	*work*	*Remarks*
UOY	500	500	A1	HX	
Naryan-Mar-Radio 1	156.8*	156.8*	F3	HX	Operates during period of navigation only

*Frequencies are given in mHz.

Storm warnings for vessels' traffic in the Pechora Inlet area for the coming 24 hours are transmitted via both the Central Port Radio and VHF radio.

Notice of Arrival: Should be given in accordance with the "Soviet Wood" Charter Party conditions.

BERTHING: The port of Naryan-Mar specialises in timber exports. Depths at the berths are up to 6.5 m. There are enclosed warehouses and open concrete floor sheds.

The necessary number of tugs for entering or leaving the port as well as for shifting berth shall be agreed upon between Pilot and Master.

A mooring berth is usually indicated by a Pilot. Shifting berths without having obtained Harbour Master's permission is not allowed. Ship's tow lines are usually used during towage.

Diesel portable cranes of up to 6 tons capacity are operated on the quays. There are also track-laying cranes of up to 12 tons and floating cranes with lifting capacity from 35—40 tons.

STEVEDORES: As per "Soviet Wood" Charter Party.

MEDICAL: No advance notice required. Clinic and hospital available.

DENSITY: Fresh water irrespective of tide.

FRESH WATER: Delivered by tanker.

FUEL: Not guaranteed.

GANGWAY/DECK WATCHMEN: To be provided by vessel.

OPENING/CLOSING HATCHES: According to "Soviet Wood" charter party.

CERTIFICATES:

Seaworthiness.
Measurement.
Load line.
Cargo Equipment.
Safety Equipment.
Deratisation Certificates.

CUSTOMS ALLOWANCE: Tobacco/Wine. No quantity limits.

IDENTIFICATION CARDS: Only Seamen's Books.

CONSULS: No Consuls.

REPAIRS: Small repairs only.

DRY DOCKS: None.

REPATRIATION: Repatriation and crew changes require visa formalities.

AIRPORT: Airport served by regular lines and situated near town.

TIME: GMT plus three hours. No seasonal alterations.

TIDE: Changes in the water level in the port area depend upon tides and effects of the wind.

The tide is semi-diurnal with two high waters and two low waters a day. The range of the tide varies from 0.9 m. — 1.8 m. Changes in water level are caused by the effects of the wind and may reach 1 m. — 1.5 m.

HOLIDAYS: See "Archangel".

POLICE/AMBULANCE/FIRE: Police 02; Ambulance 03; Fire 01.

TELEPHONES: Can be arranged on board.

SHORE LEAVE: Each crew member properly signed in ship's Articles and having valid Seaman's Book is allowed ashore.

DELAYS: Caused by rains, when vessel loading cargo of sawn goods.

AUTHORITY: The Port of Naryan-Mar Authority.

AGENT: A branch of the Port of Archangel Main Maritime Agency "Inflot" at the Port of Naryan-Mar. Pechora Timber Mill Khatanzeisky, the Port of Naryan-Mar, Archangel Region, U.S.S.R. Cable "Inflot Naryan-Mar". Tel. "Inflot" via the timber mill switchboard 30-70, 31-05.

NEVELSK: 46.40 N. 141.51 E. (See Plan Book)

GENERAL: The sea fishery port of Nevelsk is situated in the Tatarsky Strait, in the Southern part of the Nevelsky Bay. The port is open for navigation all the year round.

Changes of the water level are mainly caused by in and off-going tidal floods.

The port consists of two parts. The Outer part includes a part of the Nevelsky Bay water area with the imaginary boundaries drawn by an arc of 1.5 mile radius from the light mark installed on the Southern point of the Western breakwater. The Inner port consists of the harbour of the fishing port, the Small and the Northern Scoops. The boundary of the Inner is the line connecting the points of the Southern and the Western breakwaters.

The Master of a vessel when entering the port should keep on the leading line of the green leading light marks located at a distance of 5.5 cables to the North of the Southern point of the Naga reef. The true direction of the Leading line is 259° 2′ – 079° 2′.

The port of Nevelsk bearing in mind its position, size, weather and hydrological conditions is not and cannot serve as a sheltered port as it is only partially protected from the effects of the sea swell and winds blowing from Southerly, Westerly and N.W'ly directions and is not protected from S.W'ly winds at all. Therefore deep sea-going vessels cannot be allowed to enter the port during storm warnings. It is dangerous to stay in the port when heavy S.W'ly winds are expected.

PILOTAGE: Effected round the clock. The master of a vessel should order a Pilot via the Harbour Master's office.

ANCHORAGE: Situated in the Outer port to the South of the leading line and to seaward of the 20 m. contour. The anchorage is not protected from Westerly and Northerly winds and waves. The bottom is sand. The anchorage in the inner area is dangerous as the ground there (stone plate) does not hold anchors well.

RESTRICTIONS: The permitted draft is determined by the Harbour Master. Vessels having draft over 5.8 m. are allowed to enter the port after having obtained the Harbour Master's permission.

TUGS: Tugs ordered by the Master for mooring and unmooring meet vessels within the boundaries of the Inner port.

RADIO: Communications can be effected through the port radio station "Nevelsk-Radio".

Call sign	*Frequencies (kHz)* *Working*	*Frequencies (kHz)* *Calling*	*Type of transmission*	*Time of work*
"Nevelsk-Radio – 1"	2740	2740	A3	H24
"Nevelsk – 31"	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

BERTHING: All vessels entering the port are moored to the berths according to instructions of a port controller.

The berths of the port with depths alongside from 5.8 m. up to 6.5 m. are equipped to handle general, bulk liquid and other cargoes. There are closed warehouses, open concrete floor sheds and a cold store in the port.

It is recommended to use manilla mooring ropes due to insufficient protection of the port from effects of winds, waves and strong variable current with surge (so called the "tyagun".).

Opening and closing of hatches is usually done by the crew. All deep draft vessels are loaded/unloaded in the roads.

The berths of the port are equipped with 5 ton portal cranes. There are other cargo handling facilities and intraport transport.

FRESH WATER: Available in limited quantities.

FUEL: Diesel oil available.

TIME: GMT plus 11 hours all year round.

REPAIRS: Possible for vessels up to 4.0 m. draft.

CONSULS: None.

AUTHORITY: The Port of Nevelsk Authority.

NOVOROSSIYSK: (Including Sheskharis-Oil Harbour) 44.43 N. 37.47 E. (See Plan Book)

GENERAL: The port of Novorossiysk is situated in the N.E. part of the Black Sea, in the Bay of Novorossiysk, 60 miles S.E. of the Kerch Strait.

The port is open for navigation all the year round. Ice very seldom appears in the port area. Sometimes, in the very severe Winters particularly, a very narrow strip of thin ice (so called "zabereghi") may be formed on the coast line.

In Winter, strong, gusty N.E. winds (called "Bora"), reaching hurricane force at times, blow from the coastal mountains. Due to these winds, vessels lying at anchor in Novorossiysk Bay may very quickly become covered with ice when the temperature of the air is cooled below freezing-point.

It is impossible to enter the port when "Bora" blows, therefore, all vessels are recommended to leave Novorossiysk Bay for the open sea beforehand or lay at anchor in the Yuzhnaya Ozereika roads, at a distance of 8.5 miles Westward of the entrance to the port of Novorossiysk or in Anchorage area No. 77, to the South of the Doob Point, until the weather improves.

The range of water level in Novorossiysk Bay caused by the effect of the winds, does not exceed 0.6 m. The changes of water level, due to variation in atmospheric pressure ("Seish" effects), are observed at times. The "Seish" may last up to several days. The maximum range of water level, due to the "Seish", observed in Novorossiysk Bay is 0.6 m.

The port consists of 2 harbours – the Dry Cargo Harbour and Oil (Sheskharis) Harbour.

The inner roads are situated at the head of Novorossiysk Bay are divided from the outer roads by the Western and Eastern Moles. The outer roads are situated between the moles and the Southern border of the port.

The Dry Cargo Harbour situated inside the inner roads is protected by 2 (Western and Eastern) moles.

2 passages, the Western and Eastern, divided by Penaisky Shoals, lead to the inner roads through the port area. The Western passage is wider in comparison with the Eastern, and vessels may enter outer roads passing through it by one course.

DOCUMENTS: Refer to beginning of U.S.S.R. section

Shipmaster's Report: (1975) Notwithstanding the instructions for documentation for all U.S.S.R. ports referred to at the beginning of the section, the Novorossiysk Port Authorities require the following:

General Declaration (IMCO FAL form 1)	3 copies
Cargo Declaration (IMCO FAL form 2)	2 copies
Ship's Stores Declaration (IMCO FAL form 3)	2 copies
Crew Effects Declaration (IMCO FAL form 4)	2 copies
Crew List (IMCO FAL form 5)	6 copies
Passenger List (IMCO FAL form 6)	4 copies

PILOTAGE: Compulsory: 96 hours prior arrival cable Inflot giving ETA, name vessel, gross tonnage, exact draft, type of engine. Flag sound and Morse signal G. Pilot meets vessel at 44° 37′ N.: 37° 52′ E. Movement of vessel within inner harbour – only under Pilot guidance. If Pilot is not available vessel should anchor in area No. 52, opposite the Kabardinka settlement, recommended as an anchorage, and wait until Pilot arrives.

ANCHORAGE: Anchorage in the outer roads of the port is allowed almost everywhere but most convenient places for the purpose are to be considered the following 4 areas. The first one is area No. 52 situated to the North of the Doob Point.

Depths there vary from 12 m. to 27 m., the holding ground is mud. In the event of winds blowing from seaward Masters of all vessels are recommended to leave this area for the inner roads. Areas No. 16 and No. 63 are the second and the third anchorage places situated, respectively, 2.5 and 8 cable lengths Westward of the Penai Point. Depths there are from 13 m. to 27 m., the holding ground is mud and mud with shell. The fourth place is area No. 51 situated 6 cable lengths South-eastward of the port entrance. Depths there are from 20 m. to 24 m.

Vessels approaching the port of Novorossiysk with N.E. gales ("Bora") blowing, or caught by the storm whilst lying in the outer or inner roads, or after having received storm warning, should use every opportunity to proceed to sea or lay at anchor in the Yuzhnaya Ozereika Roads, having the main engines ready and keeping constant anchor watch.

Under the circumstances, every vessel should keep regular radio contact with port radio station.

Masters of vessels lying at anchor in the outer roads and/or in the port, are usually warned beforehand about the forthcoming N.E. winds. Since these winds may reach hurricane force during a very short period of time, particularly in Winter, all Masters lying at anchor in Novorossiysk Bay are recommended to pay careful attention at every change of the weather, to watch position of vessel to be able to prevent her drifting about anchor and proceed to sea in due time.

RESTRICTIONS: No restrictions on night entry into the Inner Roads, Mooring and/or unmooring, both in the Dry Cargo Harbour and the Sheskharis Oil Harbour cannot be effected during Southerly or N.E. winds over Force 7.

MAX. SIZE: The permitted length for entry into port is 250 m., draft 11 m. for dry cargo vessels and 13.5 m. for tankers.

HEALTH: Free pratique automatic for vessels coming direct from U.S.S.R. port. From other countries, usual procedure of sanitary inspection applies.

RADIO: Vessels can establish radio contact through port radio station Novorossiysk Radio operating 24 hours a day on the following frequencies:

Call sign	Frequencies (kHz) Working	Frequencies (kHz) Calling	Type of transmission	Time of work
UDN	500	500	A1	H24
Novorossiysk-Radio	2,182	2,182	A3	H24
UFN	8,663	8,358	A1	H24
UFN	12,919	12,537	A1	H24
	17,100	16,730	A1	HX
	4,245	4183.5	A1	HX
"Novorossiysk-Radio – 9-12" (CPR)**	156.8*	156.5*	F3	H24

*Frequencies are given in mHz

**CPR – Central Port Radio Station.

All vessels passing through the traffic controlled zone and/or anchored there have to keep constant VHF radio watch on Channel 16.

The port signal station is equipped with radar which gives all possible information for ensuring safe pilotage, and also helps Pilots in shifting vessels within the port inner roads.

TUGS: The following number of tugs and their power are stipulated for mooring operations in accordance with size of vessels to be berthed:

Ship's length	*Number of tugs and power*
from 50 to 100 m.	1 tug, from 150 i.h.p. to 600
from 101 to 160 m.	2 tugs, from 600 i.h.p. to 1,200
from 161 to 200 m.	2 tugs, 1×2,300 i.h.p., 1×1,200 i.h.p. or 3×1,200 i.h.p.
from 201 to 250 m.	3 tugs, from 1,200 i.h.p. to 2,300
over 250 m.	4 tugs, from 1,200 i.h.p. to 2,300

Notes:

1. Exceptions to the above regulations are possible if the Ship Master consents to deviations and the Harbour Master grants permission for the same. But the deviations should not affect the safety of mooring operations.

2. While manoeuvring ships to the Sheskharis Berths or jetty No. 25 one more tug of 150 i.h.p. is engaged regardless of the ship's size in view of the constructive features of the berths.

BERTHING: When proceeding in inner harbour vessels must keep both anchors ready to let go; ships to be moored by safe ropes which to be kept tight at all times. Also be ready to use anchor chain over bollard according to Pilot's recommendation. Strictly prohibited to work with propellers lying alongside berth. All mooring ropes must be fitted with rat-guard plates.

The quays of the Dry Cargo Harbour with depths alongside of up to 11.5 m. are equipped to handle general and bulk cargoes (coal, ore), metals, timber, sugar, grain, cement, fruit and vegetables.

Berths of the port are equipped with modern cargo handling facilities. There are portal cranes of up to 40 tons capacity, a floating crane with lifting capacity of up to 100 tons, automatic and electric cargo lifters and other equipment.

Opening and closing of hatches is usually done by ship's crew with the help of portal cranes at dry cargo berths, if ordered by Master, grain berth excluded.

Ores are loaded in compliance with the Temporary Regulations for Carrying Ores handed over to the Shipmaster by Inflot Agents during inwards clearance.

Following are the basic requirements of above Regulations to the ores being loaded *(a)* moisture contents not higher than 12% (if other percentage is not stipulated by Charter Party); *(b)* angle of repose is not less than 35°.

Grain and other bulk cargoes are to be loaded in strict conformity with the International Convention.

STEVEDORES: All necessary services including stevedoring work available under Port Authority guidance. Port cargo-handling regions where ships berth managed by Port Authority and used for stevedoring, tallymen service, storage, etc. On the matters connected with services available, foreign vessels have to apply to Port Authority through Maritime Agency "Inflot".

MEDICAL: In case of accident (emergency), medical attendance rendered at any time. Hospital facilities available. Also inoculation, vaccination, etc.

TANKERS: Bearing in mind N.E. gales, oil carriers lying alongside oil pier must have boat-ropes lowered to water and illuminate them at night. All scupper holes on main deck must be closed tightly. Master responsible for overflow of oil in the vicinity of harbour and has to bear harbour cleaning costs. No repair work can be done on tankers lying alongside oil pier. No ballast water may be pumped out, no garbage or refuse thrown overboard. Ballast water to be pumped into shore slop tank.

The Sheskharis Oil Harbour is situated in the Eastern part of the outer roads, 2.2 miles N.E. of the Penai Point. It is protected by a mole from the South and oil jetty from the North. The base of the jetty is used as a berth for fire-fighting boats.

Large vessels are not recommended to approach the head of the mole since the rock-bottom with depths from 12 m.–15 m. extends at 50 m. length Westward.

Since it is not safe to stay alongside berths in the Sheskharis Oil Harbour during strong winds blowing from any direction, all tankers, after having received a storm warning should take urgent measures to leave for sea.

Depths at the berths of the Sheskharis Oil Harbour are up to 14.5 m.

To ensure safe loading/unloading of oil products as well as to expedite the vessel's turn around time, every tanker should be equipped with cargo manifolds capable of fitting 8–12 in. shore-loading connections.

These manifolds should allow the upward connection with shore cargo flanges of not less than 1 m. in height and located on deck at 3 m.-5 m. length from side of vessel.

DENSITY: About 1010–1014.

FRESH WATER: Available from shore; minimum quantity invoiced at 15 tons.

FUEL: Most grades available. Fuel for tankers can be supplied ex-shore. Bunkers for dry cargo vessels are usually delivered by lighters.

FIRE PRECAUTIONS: All operations involving open fire and sparks are prohibited on oil pier. 2 fire-extinguishers, thick felt and sand must be ready beside hose connection.

GANGWAY/DECK WATCHMEN: Gangway watch compulsory and carried out by crew.

OPENING/CLOSING HATCHES: Normally by crew, otherwise according Charter Party.

CUSTOMS ALLOWANCE: No quantity limits but nothing allowed to be taken ashore.

IDENTIFICATION CARDS: Crew members get shore passes.

CONSULS: No Consulates in port or its vicinities.

REPAIRS: All kinds of repairs for vessels of up to 60,000 d.w.t. can be carried out.

Cargo Superintendent's Report: 1975.

The Novorossiysk Shiprepair Yard is capable of carrying out any ship repairs, and is equipped with three floating docks. I was unable to obtain information on the size of these docks, but estimate they are capable of handling vessels in the 100,000 ton range.

REPATRIATION: No facilities exist for effecting crew changes. A crew member may be repatriated due to family reasons or sickness but repatriation requires visa formalities.

AIRPORT: Nearest airport (Krasnodar) served by regular internal lines is situated at 150 km. from port.

Cargo Superintendent's Report: 1975.

Novorossiysk has its own airport, connected to the regular inland line's service. There are daily services to and from Moscow via Kharkov.

TIME: GMT plus 3 hours; no alterations during year.

HOLIDAYS: New Year's Day, 8th March (World's Women's Day); May 1st, 2nd (Labour Day); May 9th (Victory Day); November 7th, 8th (Great October Socialist Revolution Day); December 5th (U.S.S.R. Constitution Day). Cargo work can be arranged on those days.

POLICE/AMBULANCE/FIRE: Police, 02; Ambulance, 03; Fire, 01.

TELEPHONES: Can be arranged to be fitted on board.

SHORE LEAVE: Crew members are allowed ashore. Crew members of foreign vessels get shore passes which grant them permission to stay ashore till 2400 hrs. Crew members who lose their shore passes as well as those late from ashore, are not granted shore leave any longer in conformity with local regulations.

AUTHORITY: The Port of Novorossiysk Authority.

AGENT: Main Maritime Agency "Inflot", 13 Portovaja Str., Tel. 6-22-49, 6-22-85, 6-26-78. Cables: "Inflot" Novorossiysk. Telex: 8217.

ODESSA: 46.29 N. 30.44 E. (See Plan Book)

GENERAL: The port of Odessa is situated on the N.W. coast of the Black Sea in the S.W. part of Odessa Bay.

The port is open for navigation all the year round, but with ice-breaker assistance in severe Winters about 30 days of the year. Ice first begins to form in the second half of December and finally disappears in February. After ice has formed it is often broken up by strong winds and stormy weather. In mild Winters ice has not been observed in Odessa Bay.

Range of water level caused by winds depends on force and periods they blow, and may reach 0.6 – 1.0 m.

Atmospheric pressure has also a direct influence on the water level ("Seish" effect), but is weaker than effects of the wind. The "Seish" may last from a few minutes up to several days causing change of water level up to 0.58 m.

DOCUMENTS: Refer to IMCO forms.

PILOTAGE: Compulsory. Arranged through Inflot, but vessel to give 12 days, 96, 24 hours and 6 hours notice through Odessa radio. Pilot boat recognised by international pilot flag. Vessel requiring Pilot shows international flag "G". Pilot boards in region of anchoring place No. 62 at a distance 2.5 miles E. off Vorontzov lighthouse. Fenders should be on side where Pilot boards.

Vessels leaving the port of Odessa for the port of Kherson should proceed there under control of a State Commissioned Pilot.

Area limited by a circle with a radius of 3 miles with its centre at the Vorontzov lighthouse, as well as anchoring place No. 64 are announced to be "Traffic control zone". Vessels approaching zone from the sea must communicate with "Odessa Port Control" on VHF, Channel 14 (156.7 mHz.) and act in accordance with its instructions.

ANCHORAGES: The Outer Roads, between the port and Severny Odessky Cape, depths up to 14 m. Open to winds from N.E. to S.S.E. Good holding ground.

On arrival at the outer roads, vessels should lie at anchor whilst waiting for a berth at the anchoring place No. 62 in accordance with instructions given by "Odessa Port Control".

RESTRICTIONS: Vessels enter only with Pilot and should have lights according to Pilot's instructions. Vessels berthed depending on kind of cargo carrying or loading.

Vessels can enter and leave the port at any time of day or night.

Medium size vessels when entering or leaving port must have keel clearance not less than 1 ft.; large vessels not less than 2 ft.

Vessels are allowed to moor at berth only after having obtained Harbour Master's permission, and when the corresponding signal is exhibited at the signal station.

The speed of a vessel shall not exceed 4 knots when passing through the channel and/or in the port water areas marked by navigational marks.

Large vessels laden with ballast water only, are allowed to moor to berth if winds do not exceed Force 6. A vessel of small size may be turned broadside on to a loaded vessel of a larger size, but not vice versa.

It is strictly prohibited to turn a third vessel broadside on to 2 other vessels having been turned broadside earlier. In the event of ice a vessel may turn broadside on to another vessel only after having obtained Harbour Master's special permission.

MAX. SIZE: The maximum permitted draft is 11.5 m. Length up to 230 m.

HEALTH: Free pratique given on berthing or at the anchorage. In case of suspected disease Master must inform Inflot by cable. Free pratique cannot be granted automatically.

RADIO: Vessels can establish radio contact through the port radio station Odessa Radio operating 24 hours a day on the following frequencies:

Call sign	*Working*	*Calling*	*Type of trans-mission*	*Time*
UDE	500 kc/s.	500 kc/s.	A1	H24
UFB	8,685 kc/s.	8,361 kc/s.	A1	H24
	12,950 kc/s.	12,535.5 kc/s.		
Odessa Radio	2,182 kc/s.	2,182 kc/s.	A3	H24
	3,310 kc/s.	3,180 kc/s.	A3	H24
	17,258.5 kc/s.	—	A3H	HX
	—	16,463.5 kc/s.	A3	HX
	22,706 kc/s.	—	A3H	HX
	—	22,080.5 kc/s.	A3	HX
	4,364.7 kc/s.	—	A3H	HX
Odessa Radio	—	156.80 mc/s	F3	H24
Odessa Port Control	156.70 mc/s.	156.70 mc/s.	F3	H24
Odessa Pilot	156.70 mc/s.	156.80 mc/s.	F3	H24
Odessa Inflot (Shipping Agency)	166.65 mc/s.	156.00 mc/s.	F3	H24

Traffic and storm signals are exhibited at the port signal station located on quay No. 2 of Quarantine Mole.

RADAR: Shore-based radar provides positioning and radio-assisted pilotage in poor visibility for inward and outward going ships, on request.

TUGS: Tugs meet vessel in place indicated by Master through Pilot.

BERTHING: 38 berths available with depths alongside from 7 m. up to 12 m.

STEVEDORES: Portal electric cranes of up to 45 tons capacity are operated on the quays by the warehouses. There are grain-loaders and floating cranes with lifting capacity of up to 100 tons, other cargo handling equipment and intraport transport.

Opening and closing of mechanised hatches is always done by the ship's crew.

Opening of hatches on arrival and closing of non-mechanical hatches after loading of cargo has been completed, is done by ship's crew.

Opening and closing of non-mechanised hatches in the course of loading or unloading is done by port workers.

MEDICAL: Advance notice for medical attendance required. Notice should be given to Inflot. Hospital facilities available in case of emergency.

TANKERS: No reducing pieces necessary. Oil slop facilities available. The Oil Harbour is situated in the Northern part of the port (the inner roads), Northward of Rabochaya Harbour which is formed by a "T"-shaped mole extending E.S.E. off-shore. The bottom of the Eastern side of the mole is dangerous, therefore vessels are recommended not to approach it closer than 100 m.

DENSITY: Average density 1.0012 varying with season.

FRESH WATER: Fresh water may be supplied ex shore or ex water barge. Minimum quantity ex barge 15 tons.

FUEL: Bunkers can be supplied, and to be ordered 72 hours before arrival.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: See "Stevedores".

CUSTOMS ALLOWANCE: Tobacco. No limits on board vessel, but when going ashore not more than 1 or 2 packs. Wine and/or spirits not to be taken ashore.

CARGO GEAR: All cargo gear must have certificates for maximum weight capacity.

IDENTIFICATION CARDS: Necessary.

CONSULS:

Bulgarian Consulate tel. 66-60-92
Indian Consulate tel. 22-43-33
Cuban Consulate tel. 25-14-69

REPAIRS: All types of deck and engine repairs can be carried out.

DRY DOCKS: Available.

REPATRIATION: Can be arranged.

AIRPORT: Distance to airport 10 miles. Direct airlines with several socialist countries and with the rest of the world through Moscow. Planes fly to Moscow 3 times a day.

TIME: Local time GMT plus 3 hours.

HOLIDAYS: Work can be arranged on below mentioned holidays through Sovfracht, Moscow, at special rates. Holidays: 1st January, 8th March, 1st and 2nd May, 7th October, 7th and 8th November.

POLICE/AMBULANCE/FIRE: Police (Militia), 02 from town; 902 from port.

TELEPHONES: Telephones may be installed on board.

SERVICES: Tank-cleaning equipment available.

SHORE LEAVE: Crew members allowed to stay ashore till midnight. Master without limitation.

DELAYS: Vessels berthed in turn.

AUTHORITY: The Port of Odessa Authority.

AGENT: The port of Odessa Main Maritime Agency "Inflot". Postal address: 1 Vakulenchuk Square, Odessa, V-4 U.S.S.R. Cables "Inflot Odessa". Tel. 22-39-02, 293-37-81, 293-38-01; Telex 185.

ONEGA: 63.54 N. 38.06 E. (See Plan Book)

GENERAL: The port of Onega is situated on the right bank of the Onega river (3–4 miles up from the mouth), flowing into Onezhsky Bay off the White Sea.

Port open for navigation for about 6–7 months per year, starting from May. In Autumn, when the river is covered with ice, assistance of ice-breaker is required but may not be rendered regularly.

Opening and closing of the port for navigation as well as turn and order of entering the port is usually regulated by the Port Authorities.

Changes of water level in the river depend on tide, spring floods and effects of the wind.

The tide is semi-diurnal with two high and two low waters a day. At the Onega river mouth the range of the tide at mean springs may reach 2.7 m.

The rises of the water level are due to North-westerly, Northern and North-easterly winds. The falls of the water level are usually caused by South-easterly, Southerly and South-westerly winds.

The Onega river becomes frozen over at the beginning of November. Ice begins to form in October and usually breaks up at the end of April or early May.

A vast area of shoal waters is situated at the mouth of the Onega river.

Access into the Onega river is by the Karelsky Fairway. Vessels drawing up to 6.1 m. may pass through it at high water.

Since depths in the river vary, Masters are recommended to get in touch with the Harbour Master to make enquiries about the existing least depth in the fairway before entering the river.

The port specialises in timber exports.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Compulsory. A Pilot should be ordered by the Master 24 hours prior to arrival at the Letny Orlov Pilot Station. A Pilot meets a vessel at a distance of 0.7 mile Westward of the Letny Orlov Point.

ANCHORAGE: Vessels drawing up to 2.4 m. can obtain anchorage in the Town roadstead below the Severoles wharf. The roadstead situated opposite timber mill No. 32 – 44 can be used as anchorage by vessels drawing up to 3.55 m.

During winds blowing from the North-westward vessels are recommended to anchor in the Petchak area of the Solovetskie Islands, with depths of 10 m. at 1 mile distance offshore.

During Southerly winds of 5-6 force, a safe anchorage with depths of 10 m. can be obtained in the Konyukhov Inlet, 1 mile offshore.

In case of North-westerly storms, vessels lying on the Karelsky roads should anchor in the Purnema area with depths from 6 m. to 10 m. where an anchorage light buoy is installed (64° 20′ N., 37° 27′ E.).

The recommended anchorages for vessels proceeding to the port of Onega along the fairway are situated in the following places:

1. On the line of the Town of Onega leading marks and on the beam line of the front mark of Pikhnemsky No. 2 leading line. Depths are from 3.7 m.–4 m., the bottom – mud and small stone.
2. In the area of the Onega river, a short distance Northward of the town of Onega leading marks, opposite the Export quay. The least depth in the area is 4 m., its length – 700 m., the bottom is mud and small stone.
3. Southward of the Pristansky (Quays) leading line but not passing over the line of the Pristansky Sekushchy (Quays Crossing) leading marks to the Eastward of it. The depths are from 3 m. – 3.7 m., the holding ground – mud, small stone and stone.

RESTRICTIONS: Vessels having draft not more than 3 m. may enter port at any time, but with draft more than 3 m. only 1 hour before high water.

The speed of vessels having the maximum draft should not exceed 8 knots. The movement of vessels within the port area is not allowed during restricted visibility.

MAX. SIZE: The max. permitted draft is usually announced at the beginning of the navigation season after sounding of the fairway has been accomplished. It varies from 5.1–6.4 m. Max. permitted length is 124 m.

HEALTH: Alongside or on the Roads all vessels coming from aboard inspected by Sanitary Office representative. If no diseases, vessel obtains free pratique. If vessel enters directly after calling at another Russian port, pratique automatic.

RADIO: Besides Murmansk and Archangel, Onega Radio (UZS), 500 kc/s.; VHF of pilot office at port of Onega (Channel 16).

Vessels can establish radio contact through the port radio station Onega Radio operating 24 hours a day on the following frequencies:

Call sign	Frequencies (kHz) Working	Frequencies (kHz) Calling	Type of transmission	Time of Work	Remarks
UZS	500	500	A1	H24	
"Onega-Radio – 1" ("Inflot Agency")	156.8*	156.8*	F3	H24	Operates during navigation only
"Onega-Radio – 2" (Port Control)	156.8*	156.8*	F3	H24	On request
"Onega-Radio – 3" (The Harbour Master's Office)	156.8*	156.8*	F3	H24	Operates during navigation only

*Frequencies are given in mHz.

The Onega storm signals station is located on the roof of the Harbour Master's office. Day signals warning about forthcoming storms and strong winds in the Onega Bay area are exhibited at mast of the signal station.

TUGS: The number of tugs required for mooring/unmooring and shifting berths is determined by the Master after having consulted the Pilot. Tugs should be ordered 6 hours prior to leaving the port for sea.

BERTHING: Depths at the port berths are up to 6.5 m. There are enclosed warehouses and open concrete floor sheds. Loading of timber usually by ship's gear.

STEVEDORES: No particular ETA advices to stevedores/shippers. Loading of timber usually carried out by ship's winches at average rate of 24 stds. per hatch per working day.

MEDICAL: Doctor and hospital facilities available.

FRESH WATER: Available. Usually delivered by tankers.

FUEL: Availability not guaranteed.

GANGWAY/DECK WATCHMEN: Usually by ship's crew.

OPENING/CLOSING HATCHES: In accordance with "Soviet Wood" charter-party conditions.

CUSTOMS ALLOWANCE: No restriction on quantity, but nothing to be taken ashore.

IDENTIFICATION CARDS: Only Seamens Books required.

REPAIRS: Small repairs only.

REPATRIATION: Subject to visa formalities.

AIRPORT: Nearest at Archangel.

TIME: GMT plus 3 hours. (All the year round).

HOLIDAYS: See "Archangel".

SHORE LEAVE: Allowed up to midnight.

AUTHORITY: The Port of Onega Authority.

AGENT: A branch of the port of Archangel, Main Maritime Agency "Inflot" at the port of Onega. Postal address: 164880 – The Port of Onega – Archangel Region, U.S.S.R. Cables "Inflot Onega". Tel. Timber Mill Switchboard 33–33, "Inflot".

POTI: 42.09 N. 41.39 E. (See Plan Book)

GENERAL: The port of Poti is situated 2 miles North of the Rioni river mouth and on the S.E. coast of the Black Sea.

Port open for navigation all the year round.

Changes of the water level in the port area are caused by the winds and usually reach 0.6 m.

The max. range of the water level observed in the river is 0.9 m.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Compulsory. Radio 96, 48 hours prior arrival to Port Controller and Inflot Agency advising ETA, description and quantity of cargo, location and weight of heavy lifts, if any, number of passengers, ship's length and draft, as well as any services required. Confirmation of ETA required 4 hours prior arrival. Inflot will arrange Pilot basis above information.

Pilot will board vessel in the outer roads at 5 cables length from the Poti light buoy. (42° 09′ N., 41° 37′ 07″ E.).

The Harbour Master will give the Master of a vessel appropriate instructions if the Pilot is not able to disembark in the outer roads due to stormy weather or heavy waves.

ANCHORAGE: In outer port which is protected by Novy Severny, Yuzhny, and Zapadny Moles, and by Zapadny Breakwater. Safe anchorage for deep drafted vessels, except in periods when "Tyagun", a strong variable current with surge, occurs, with winds from N.W., W., and S.W.

The outer roads are bounded by two parallels – 42° 12′ N. and 42° 08′ N., by the meridian of 41° 35′ E. and the coast line.

The roads are open to winds blowing from the sea. Therefore, in the event of stormy weather vessels are recommended to leave anchorage in the outer roads for sea.

Protected by the New Northern, Southern and Western moles the port ensures a good anchorage for deep-drafted vessels, except periods when North-westerly, Westerly and South-westerly winds form a strong, variable current with surge ("Tyagun"). Strong Westerly, South-westerly and Easterly winds make the entry to the port more difficult.

A good anchorage with depths of 10 m. to 30 m. can be obtained at a distance of 1.3 miles N.W. and 1.1 mile West of the head of the Western mole.

Vessels are prohibited from anchoring in the S.W. part of the Southern Harbour and in the centre of the Inner Basin.

RESTRICTIONS: Vessels are prohibited from entering the port when the entrance and the leading lights are covered with fog.

Vessel's speed shall not exceed 4 knots in the port areas marked by navigation marks.

There are no restrictions for night entry.

MAX. SIZE: The max. permitted draft for entry to the port is 9.4 m. and the length from 170 m. to 190 m.

HEALTH: Free pratique automatic for vessels from another U.S.S.R. port. Other vessels are boarded on arrival.

RADIO: Vessels can establish radio contact through the port radio station Poti Radio operating 24 hours on the following frequencies:

Call sign	Frequencies (kHz) Working	Frequencies (kHz) Calling	Type of transmission	Time
UVB	500/421	500/425	A1	H24
"Palmira" (Port Control)	156.8*	156.8*	F3	H24
"Fontan" (CPR)	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

**CPR – Central Port Radio Station.

Traffic signals for vessels entering and leaving the port are exhibited at the signal mast located at the head of the Northern mole.

BERTHING: The port of Poti comprises three harbours: the Yuznaya (Southern), Severnaya (Northern) and Vnutrenniaya (inner) harbours. 15 berths in port, with depths up to 8.35 m. alongside.

Berthing in the port can be effected with tug assistance only.

The berths of the port, with depth alongside up to 9.75 m., are equipped to handle general and bulk (ore, coal) cargoes, mineral oil products, metals, fruits, vegetables, etc., as well as passenger traffic.

Portal electric cranes of up to 20 tons capacity are operated on the quays. There are also floating cranes with lifting capacity of up to 100 tons.

MEDICAL: Qualified medical service is available free of charge, including dispensary and hospital treatment.

STEVEDORES: Arranged by Inflot.

DENSITY: About 1015, variable with season.

FRESH WATER: Fresh water supplied ex shore to ship directly or ex water barge in boundaries of port.

FUEL: Bunkers in small quantities are available. Fuel in quantities over 500 tons will be supplied if an order is placed not less than 5 days prior to a vessel's bunkering. Bunkers are delivered by barges.

CUSTOMS ALLOWANCE: No restriction on quantities but nothing to be taken ashore.

CONSULS: See "Odessa".

REPAIRS: Only minor repairs can be effected. There are no dry docks in the port.

AIRPORT: Nearest at Odessa.

TIME: GMT plus 4 hours all year round.

HOLIDAYS: 1st January (New Years Day); 8th March (International Women's Day); 1st, 2nd May (Workers' International Solidarity Day); 9th May (Victory Day); 7th, 8th November (Anniversary of October Revolution); 5th December (U.S.S.R. Constitution Day).

POLICE/FIRE/AMBULANCE: Police service, tel. 0-2; Ambulance, tel. 0-3; Fire Service, tel. 0-1.

SHORE LEAVE: Crew members allowed ashore up to midnight.

AUTHORITY: The Port of Poti Authority.

AGENTS: The Port of Poti Maritime Agency "Inflot". 52 Lenin Street. 384691 – Port of Poti, U.S.S.R. Cables: Inflot Poti. Telephones: 9-32-27; 9-33-48.

PYARNU: 58.23 N. 24.29 E.

GENERAL: The port of Pyarnu, a sea fishing port, is situated in the N.E. part of the Riga Bay, at the estuary of the Pyarnu river falling into the Pyarnu Lakht.

Vessels, with a draft of 4.5 m. can reach the port by the channel about 2.5 mile long and about 60 m. wide.

At the estuary of the Pyarnu river the channel is protected by two moles extending S.W. from the shore. Depths at the berths are of up to 5 m. Changes of the water level within the port aquatorium are due to tides caused by winds.

Vessels proceeding to the port by the channel are recommended to have sufficient keel clearance bearing in mind requirements of good sea practice. The pilotage is carried out with due regard to the existing water level compared usually with the mean water level at the Kronstadt tide-gauge. Data of the exact depth of the channel can be obtained from the Harbour Master's office. The harbour of the port is usually frozen over from November till April. During mild Winters the port is open for navigation all the year round.

PILOTAGE: The port of Pyarnu has no special Pilot service. In view of this Pilots for entry or leaving should be ordered at the port of Tallinn Harbour Master's office through maritime Agency "Inflot" at the port of Tallinn. Pilots embark at the port of Pyarnu roadstead.

ANCHORAGE: The port of Pyarnu roadstead occupies the whole of the middle part of the head of the Pyarnu Lakht limited by the 5 m. line.

When in the roadstead vessels may anchor on both sides of the Pyarnu-Morskoi leading line, beyond the boundaries of the fishing areas. The holding ground is good. The roadstead is sheltered from winds of all directions, except those blowing from the South and S.W.

Masters should bear in mind that there are a lot of fish nets laid in the Pyarnu Lakht. The boundaries of the fish net prohibited areas for navigation of merchant vessels are marked on the charts.

RESTRICTIONS: All traffic of vessels both in the harbour and in the approaches to the port is controlled by the Harbour Master's office, by a Master on duty.

Navigation in the approaching channel is allowed day and night, in turn, but only in one direction at one time.

It is prohibited for vessels to pass by each other and pass by vessels keeping the leading marks of the approaching channel in line as well as to cross the channel.

The priority to navigate in the channel is given to vessels leaving the harbour. In this case vessels proceeding to the port must give way to outgoing vessel not preventing her maneouvring. The turn of movement in the channel is stipulated by the port controller but the traffic of vessels itself is controlled by the Harbour Master's office.

Vessels navigating both in the channel and in the harbour must proceed at a moderate speed to avoid the possibility of causing waves.

If winds over force 6 Beaufort scale entry to the port, leaving the port and shifting berths is allowed by the Harbour Master or a person in charge only.

RADIO: Communication can be effected through the port of Pyarnu radio station.

Call sign	*Frequencies (kHz)* *working*	*calling*	*Type of trans-mission*	*Time of work*	*Remarks*
RKDF	500	500	A1	00.00— 06.00	12.00— 13.00
	487	—	A1	20.00— 21.00	
"BASIS"	1650	1650	A3	H24	From 15 to 15 min. of every hour

Notice of arrival: All vessels proceeding to the port from the seaward should advise their ETA to the Port Controller. Masters should also advise vessels' particulars and the purpose of visit.

TUGS: Tugs should be ordered through the Port Controller's service. Towage of vessels within the port is prohibited if wind over force 6.

BERTHING: Vessels having draft over 4.5 m. cannot berth. During S.W'ly and Westerly winds force 8 and over, when in the port, the Master or his Chief Mate must be on board and have sufficient number of the crew on board in order to secure the vessel safely.

Berths of the port are equipped to handle vessels loaded with fish and fish products, salt, timber, rod metal and some other cargoes. There is a closed warehouse and an open concrete floor shed for storage of salt. The Port Authority plans to build a new cold store with administrative buildings.

TIME: GMT + 3 hours all year round.

AUTHORITY: The port of Pyarnu Authority.

AGENT: No "Inflot" Agency at the port.

RENI: 45.26 N. 28.18 E. (See Plan Book)

GENERAL: The port of Reni is situated at a distance 25 miles up from the Izmail Chatal Point on the left bank of the Danube river.

The port is open for navigation for about 317 days of the year. In severe winters ice-breaker assistance is required.

The Danube river and Kilia Mouth become completely frozen over only in severe winters, at the end of December or early January. Ice finally disappears in February or early March.

Changes of the water level are due to effects of the wind and spring floods.

Maximum rises of the water level are usually observed in April, May and June, maximum falls August, September and October.

Maximum range of the water level observed in the river is 4 m. – 6 m.

DOCUMENTS: Refer to beginning of U.S.S.R. Section.

PILOTAGE: Compulsory. All vessels proceeding from the Izmail Chatal Point up to Reni and vice versa must navigate under control of a State Commissioned Pilot.

ANCHORAGE: Vessels should anchor in the port roads with depths from 10 m. to 20 m. The holding ground is clay and mud.

RESTRICTIONS: There are no time restrictions for the entry to the port. Both draft and length of vessels are limited by depths and width of the Sulin channel.

RADIO: Vessels can establish radio contact through the port radio station Reni Radio operating 24 hours per day on the following frequencies:

Call sign	*Frequencies (kHz)* *Working*	*Calling*	*Type of trans-mission*	*Time*
IJN-3 (Port)	489	468	A1	HX
"Reni Radio – 1" (Port Controller's Office)	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

BERTHING: Tug assistance is not compulsory. Tugs are available if requested by Master.

The port is accessible for large ships. The berths with depths alongside of up to 8.25 m. are equipped to handle general and bulk cargoes, crude oil and oil products, grain and food products.

Cranes of up to 10 tons capacity are operated on the quays. Also there are floating cranes with lifting capacity of up to 100 tons and other cargo handling equipment.

FUEL: Available.

FRESH WATER: Can be supplied ex shore and by barges.

OPENING/CLOSING HATCHES: According to the custom of the port, opening and closing of hatches is carried out by the crew. But it can be carried out by the port workers for vessel's account, if required by the Master.

REPAIRS: Only minor hull and engine repairs can be carried out. There are no dry docking facilities.

CONSULS: None.

TIME: Local time: GMT plus 3 hours all the year round.

AUTHORITY: The Port of Reni Authority.

AGENT: The Port of Reni Maritime Agency "Inflot". Postal address: 192 Dunai Street, The Port of Reni, U.S.S.R. Cables "Inflot Reni". Tel. 3-47, 3-46.

RIGA: 56.58 N. 24.06 E. (See Plan Book)

GENERAL: A Baltic seaport, Riga is situated at the mouth of the Daugava (Western Dvina) river falling into the Gulf of Riga.

The water area of the port is formed by the lower part of the Daugava river from the mouth up to a railway bridge, thence by the Milgravis channel and Sarcandaugava Creek.

The roadstead of the port is situated at the mouth of the Daugava river.

The entrance channel with depths of 10 m.–11 m. leads across the river bar into the port.

The port is open for navigation all the year round, but ice-breaker assistance is required about 4 months of the year.

The Gulf of Riga is frozen over for quite a long time. On the coast of the Gulf, ice first appears in December and finally disappears in April. The middle part of the Gulf gets frozen over only in severe Winters and for a short period. Usually ice in this area is mostly drift ice.

Considerable changes of the water level may be caused by strong winds and variation in atmospheric pressure ("Seish" effects).

The range of the water level caused by winds depends on the force of the wind, direction and period of time it blows.

Most sharp rises and falls of the water level are observed at the mouth of the Daugava river. They may reach at times 1.3 m.-1.8 m. higher and 0.9 m.-1.1 m. lower than the datum at Kronshtadt.

The level of the water in the port usually depends on the ordinary water level in the Daugava river.

The max. rise of the water level caused by winds may reach 2 m. higher and fall – 1 m. lower than the mean water level observed over a period of many years.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Compulsory. Inflot will arrange Pilot on receipt of ETA at Daugavgriva Buoy, which to be given 96, 48, 24 and 4 hours prior arrival. Also advise with ETA details of cargo, last port of call, passengers if any, ship's draft and length.

Pilot meets vessel at receiving light buoy No. 1 Daugavgriva (57° 06′ N., 23° 57′ E.). In case of bad weather, when Pilot is unable to come aboard, vessel should follow in the wake of a Pilot boat, up to the mouth of the river, where Pilot will board vessel.

4 hours prior to arrival at this buoy the Master should advise his ETA by VHF, Channel 14, via CPR.

Vessels leaving the port should navigate under Pilot control to receiving buoy No. 1 Daugavgriva.

ANCHORAGE: The best anchorage can be obtained in the port of Riga roads, at a distance 4 miles off the Daugavgriva lighthouse, bearing 310° Westward of light buoy No. 1. Depths in the anchorage are from 22 m. to 35 m. The bottom is mud and sand. It is not recommended to come closer to the shore without a Pilot on board.

The port of Riga roads are situated N.W. of the entrance to the mouth of the Daugava river.

The roads are open to winds blowing between S.W. and N.E.; therefore, in Autumn, when these winds prevail, anchorage there is unsafe.

In periods when heavy waves in the roads are caused by fresh Northerly winds, vessels are recommended to leave the roads for shelter in the port or go to the open part of the Gulf of Riga.

The depths in the roads are from 15 m. to 30 m. Holding ground is good.

RESTRICTIONS: Permitted draft for the entry into port is between 7.5 m.-9.5 m. at the mean water level.

Entry to the Daugava river and the port of Riga is accessible for vessels having drafts ensuring safe passage across the river bar.

As a rule, vessels passing along the channel are requested to have keel clearance not less than 0.45 m.

The speed of vessels navigating in the Daugava river should not exceed 6 knots.

There are no restrictions as to length of vessel and time of entry to the port.

Large vessels laid up with ballast water are not allowed to shift berth during winds force 6 Beaufort scale and over.

MAX. SIZE: Max. permitted draft for vessels going to berths of the port for discharging is 9.75 m. in fresh water, if the water level is "O" datum at Kronshtadt.

Vessels having draft more than 9.75 m. are being discharged into barges in the inner road which has 2 mooring buoys, 3 miles from the mouth of the river. Max. permitted draft for vessels going to the inner road is 10.50 m. in fresh water, if the water level is "O" datum at Kronshtadt.

Also see "Shipmasters Report".

HEALTH: Pratique obtainable after vessels mooring when Health Officials visit vessel with Immigration and Customs Officers. Health Inspector to be informed of any medical assistance required.

RADIO: *Notice of Arrival:* In Winter when the Irben Strait and the Gulf of Riga are completely frozen over and ice-breaker assistance is required, vessels proceeding to the port of Riga should advise Harbour Master their ETA to the edge of the ice, vessel's ice classification and estimation in days for the expenditure of fresh water and fuel available on board to the moment of approaching the edge of the ice.

Vessels can established ship-shore radio contact via the port radio station Riga Radio, operating 24 hours a day on the following frequencies:

Call sign	*Frequencies (kHz) Working*	*Frequencies (kHz) Calling*	*Type of trans-mission*	*Time of Work*
UKB	500	500	A1	H24
UKB	489	468	A1	H24
UDH	4,236	4,184	A1	H24
	8,506	8,367	A1	H24
	13,070	12,547.5	A1	H24
"Riga Radio"	—	4,066.1	A3	HX
"Riga Radio" (CPR-Central	4,364.7	—	A3H	—
Port Radio)	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

TUGS: Use of tugs is obligatory. The number of tugs depends on length of the vessel and place of berthing.

BERTHING: Berths of the port with depths up to 9.7 m. alongside are equipped to handle general and bulk (ore, coal) cargoes, metals, timber, grain, food products and passenger traffic.

Number of tugs to be ordered for entry assistance or for shifting berth is decided by Master in accordance with Pilot's recommendation.

Cranes of up to 45 tons capacity are operated on the quays and by the warehouses. Also, there are floating cranes with lifting capacity of up to 100 tons, other cargo handling equipment and intra-port transport.

Opening and closing of hatches is usually done in accordance with conditions of Charter Party.

MEDICAL: All medical assistance available.

STEVEDORES: Arranged by Inflot who should be given necessary information in advance.

DENSITY: About 1002.

FRESH WATER: Only available ex-berth.

FUEL: Fuel is usually taken at the oil jetties. Bunkers may also be delivered to the roads or supplied by lighters at a berth during loading/unloading of non-inflammable cargoes.

GANGWAY/DECK WATCHMEN: Recommended. These duties normally performed by crew.

OPENING/CLOSING HATCHES: Normally by ship's crew.

CUSTOMS ALLOWANCE: No restriction on quantities, but nothing may be taken ashore.

IDENTIFICATION CARDS: Seaman's Book required.

CONSULS: None.

REPAIRS: Repairs possible for hull, machinery, radio and navigational equipment. Floating crane available, capacity 100 tons. All kinds of repairs for vessels up to 30,000 d.w.t. can be carried out.

REPATRIATION: Only subject to visa restrictions.

TIME: GMT plus 3 hours all year round.

HOLIDAYS: 1st January, 8th March, 1st and 2nd May, 9th May, 7th and 8th November, 5th December.

POLICE/FIRE/AMBULANCE: Advise Inflot.

SHORE LEAVE: Crew allowed ashore.

SHIPMASTER'S REPORT: 1976:

On approaching the area where Irbenskiy Lt./VI should have been placed, it was found that the Lt./VI and buoys had been removed for the Winter season and replaced by spar buoys, although these could not be observed on the radar or visually due to the adverse weather.

Two other vessels were waiting for daylight transit of the channel, I also decided to wait for daylight due to a 5 fathom bank being recorded on the chart.

On entering the channel it appears to be very much wider than indicated on the chart also where the chart has the channel buoys in a straight line this was not so, although the alteration of the channel could have been due to the use of the Winter buoys.

In Baltic Pilot Vol. II vessels are allowed to enter at 26 ft. 3 in. This is incorrect as the maximum draft is now 32 ft. Vessels up to 37 ft. were at the anchorage, where they are lightened up to 32 ft. before proceeding into the harbour.

Two berths were being used for the discharge of grain, by shore cranes into wagons.

In the early hours of Sunday morning, 4th January, the temperature being −14° C, a thin film of ice formed in the harbour, this had disappeared by mid-afternoon. Except for this occasion no ice was seen at all in the Baltic, although the climate was very cold.

The Bond was not put under seal, but they were very strict on currency list, 3 copies being required, also the total amounts of each different currency is required.

AUTHORITY: Port of Riga Authority.

AGENT: The Port of Riga Main Maritime Agency "Inflot". Postal address: 6 Vilis Latsis Street, 226180-Riga, U.S.S.R. Cables "Inflot Riga". Tel. 33-15-37; 33-97-03. Telex 1157.

SOCHI: 43.34 N. 39.43 E. (See Plan Book)

GENERAL: The port of Sochi is an ice-free port, situated at the mouth of the Sochi river, S.E. of the Uch-Dere Point, in the Eastern part of the Black Sea.

The port is protected by the Caucasian chain of mountains from cold N.E. winds but it is open to winds blowing from Southerly and Westerly directions when heavy waves may roll over the port moles causing heavy swell in the harbour.

The port mostly handles passenger traffic.

There are passenger terminals, one of which serves hydrofoil ships only. About 3 million passengers visit the port yearly.

A cargo pier is equipped to handle fruit, building materials and cars. There are enclosed warehouses on the cargo pier and on one of the passenger terminals.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Pilot boat usually meets vessel at a distance of about 1 mile from the port. In the event of bad weather or restricted visibility, vessel should anchor or drift at a safe distance from the port until Pilot arrives.

ANCHORAGE: Deep drafted vessels may obtain anchorage in the outer roads Westward of the Northern mole. The depths in the roads are from 11 m. to 13 m.

Some distance Westward, in depths 20 m. – 23 m., there are mooring buoys which can be used during vessels' stay in the roads.

Anchorage can also be obtained at 1.3–1.5 mile distance S.S.W. of the Sochi lighthouse. Depths there are about 29 m. The bottom is mud with sand, and small stone closer to the shore.

Anchorages are open to winds blowing from the sea.

RESTRICTIONS: There are no time restrictions for entry to the port.

In case of stormy weather entry to the port is difficult due to the swell caused by heavy waves in the approach and in the narrow entrance to the port.

In the event of heavy surf vessels must anchor in the outer roads since entry to the port is impossible.

Entry to the port is not allowed during heavy waves over force 4 and winds over force 6 as well as during bad visibility.

During the Autumn-Winter period the port of Sochi cannot be used as shelter port, because lying in the port is dangerous due to the strong variable current ("Tyagun") usually caused by gales blowing between S.E. and N.W.

Under these circumstances the Port Authorities cannot guarantee safety to a vessel which, after having received a storm warning, did not make for sea, and bear no responsibility for the consequencies.

MAX. SIZE: The maximum permitted draft is 8 m., length 190 m.

RADIO: Vessels can establish ship-shore radio contact through the port radio station Sochi Radio, operating 24 hours a day on the following frequencies:

Call sign	*Frequencies (kHz) Working*	*Frequencies (kHz) Calling*	*Type of trans-mission*	*Time of work*
UZB	500/516	500	A1	H24
"Smena" (Port Controller)	156.8*	156.8*	F3	H24
"Sochi-Radio" (Radio Operator of the Port Controllers' Office.)	2,310	2,310	A3A	0800–2300

*Frequencies are given in mHz.

A signal station is located at the Sochi lighthouse from which visual signals are shown.

BERTHING: A vessel intending to enter port with tug assistance should keep the Sochi mid-channel leading marks in line ahead and stop the main engines in due time to allow vessel to come to the state of "no motion" at a distance of 1 mile from the port entrance. Only under these conditions is a tug allowed to approach a vessel and receive or cast off the tow rope.

Due to a small port area and heavy water streams caused by vessels' propellers Masters of vessels of 2,000 g.r.t. and over must order 1 tug for entering and leaving the port; for vessels of 4,000 g.r.t. and over 2 tugs are required. Shifting berth is allowed during winds not exceeding force 5 Beaufort scale. Opening and closing of hatches on dry cargo vessels is carried out by the crew; on passenger vessels cargo hatches are opened and closed by the port workers.

There are two portal cranes of 5 and 10 tons lifting capacity, 10 ton caterpillar cranes, fork-lifts and other cargo handling equipment.

FUEL: Not available.

FRESH WATER: Can be supplied by pipe-lines at nearly all berths.

REPAIRS: Not available.

TIME: GMT plus 3 hours all the year.

AUTHORITY: The Port of Sochi Authority.

AGENT: A branch of the port of Novorossiysk Main Maritime Agency "Inflot" at the port of Sochi. Postal address: 1 Voykov Street, Sochi, 354000, U.S.S.R. Cables "Inflot Sochi". Tel. 99-05-86; 996-62-70. Telex 128.'

SUKHUMI: 42.57 N. 41.00 E. (See Plan Book)

GENERAL: A Black Sea passenger port Sukhumi is situated at the head of the Sukhumi Bay, 2 miles E.N.E of the Sukhumi Point. The port is open for navigation all the year round. Both the port itself and the Gulf are open to winds blowing from the sea.

Several berths of the port are equipped to handle passenger traffic.

The port area is bounded by the shore line and the imaginary line connecting the Sakhumi Point and the mouth of the Kelasuri river.

The port is visited by regular and cruise passenger vessels.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: A Pilot meets vessel in the outer roads. Compulsory for foreign flag vessels.

ANCHORAGE: Anchorages are situated in the outer roads on the Northern coast of the Sukhumi Bay, opposite the mouth of the Beslet river.

A good anchorage can be obtained at the line of the Sukhumi leading light marks. Depths are from 12 m. to 50 m. The bottom is mud.

Master should watch carefully the Sukhumi leading light marks when approaching the anchorage and cast anchor only at the moment when the leading light marks are in line or some small distance closer to the shore.

At 2 cables length seaward of the leading line, the depths increase sharply and reach 130 m.

Whilst waiting for a berth vessel should lie at anchor at the line of the Sukhumi leading light marks. This anchorage is unsafe during gales blowing from the sea.

RESTRICTIONS: Vessels may enter or leave the port at any time of day or night.

MAX. SIZE: The max. permitted draft is 7.6 m., length 180 m.

RADIO: Ship-shore radio contact can be established via the port radio station Sukhumi Radio operating 24 hours a day on the following frequencies:

	Frequencies (kHz)		*Type of trans-mission*	
Call sign	*Working*	*Calling*		*Time*
UFF	500/450	500/454	A1	H24
"Sukhumi Radio"	2182	2182	A3	H24
"Privet" (Port Control)	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

Storm signals are exhibited at a signal mast located on the roof of the Port Authority's office.

BERTHING: Vessels of up to 190.0 m. in length are allowed to moor at the new passenger pier. The permitted draft is restricted by the depth of water (7.8 m.). Vessels are not allowed to moor to berths during dense fog and in restricted visibility when navigational lights and the current indicator on the passenger berth are not visible. In this event vessel should anchor and disembark passengers in the outer roads.

When mooring, Master should bear in mind the direction of the current and the effect on the mooring angle of vessel.

By day, the direction of the current indicated by a sparbuoy located at the head of the passenger pier, and at night, by lights exhibited from the elevation of the front leading light.

A green light shown lower than the front leading light indicates Easterly current, and a red light, current of Westerly direction.

The rate of the current is usually determined by the Master himself.

Due to the constant influence of the current, mooring is usually effected without tug assistance.

Masters of vessels moored at the port berths should keep the main engines ready bearing in mind the fact that the outer roads of the port are not protected from the effect of winds.

There are no portal cranes on the passenger pier. Handling of cargo is done by caterpillar with lifting capacity of 12 tons.

FUEL: Can be supplied by lighters.

FRESH WATER: Supplied ex-shore.

REPAIRS: Not possible.

TIME: GMT plus 4 hours all the year.

AUTHORITY: The Port of Sukhumi Authority.

AGENT: A branch of the Port of Batumi Main Maritime Agency "Inflot" at the Port of Sukhumi. Cables "Inflot Sukhumi".

TALLINN: 59.26 N. 24.43 E. (See Plan Book)

GENERAL: A Baltic seaport situated in Tallinn Bay. Year-round navigation is possible. Tallinn Bay is usually frozen over in severe Winters only. In the Winter months the port of Tallinn is kept open for navigation by ice-breakers. The tidal range in Tallinn Bay is of very small account. The difference of the water level in the Bay is due solely to the effects of the wind. A rise of the water about 0.4-0.5 m. from mean water level is observed during N.W. and Westerly winds. The fall of the water is caused by S.E. and Easterly winds. It usually reaches 0.2-0.4 m. below the mean water level.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Compulsory. 24 hour Pilot service is available. Pilots board vessels at the Tallinn Madal Bank (Lat. 59° 42′ 05″ N., Long. 24° 38′ 00″ E.). In case of stormy weather vessels should follow pilot boat to a sheltered position where Pilot is able to embark/disembark or use the assistance of the shore radar station. Pilot should be ordered by VHF through the "Inflot" Agency not later than 2 hours prior to arrival at the Pilots' boarding place.

ANCHORAGE: Anchorages are situated in the port of Tallinn outer roads. One of them, with depths of 14.0 m. – 22.0 m., is situated 2 cables to the North of the head of the Northern Mole; the other Eastward of the Tallinn leading line and N.E. of the mouth of the Pirita river. Depths are from 12.5 m. up to 31.0 m.

RESTRICTIONS: Vessels can enter or leave the harbour through the Northern or Southern entrances. Entry to the port through the Northern entrance can be used by vessels having draft of up to 8.5 m. The Southern entrance can be used by vessels having draft of up to 7.0 m. Depths of water in the Southern entrance area can vary due to the movement of deposits. Vessels can enter or leave the port at any time of day and night.

MAX. SIZE: LOA 155 m., width 22.0 m. and draft 8.5 m.

HEALTH: International quarantine signals to be used on arrival. No later than 6 hours before arrival at the inner area Master should radio Agents giving full details of state of health on board, and requesting pratique which will be given on arrival.

RADIO: All vessels when approaching the Port of Tallinn should establish radio contact via Tallinn Radio port radio station which operates 24 hours a day on the following frequencies:

	Frequencies (kHz)		*Type of trans-mission*	
Call sign	*Working*	*Calling*		*Time*
UNS	500	500	A1	H24
UAH	6485	6276.75	A1	H24
UAH	8476	8369	A1	HX
	12723	12541.5	A1	HX
	17077	16732	A1	HX
	4285	4185.5	A1	HX
"Tallinn Radio"	2182	2182	A3	H24
"Tallinn Port"	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

The movement of vessels within the port and in the outer roads is controlled by the Traffic Control Post located at the Port of Tallinn Authority building.

TUGS: Tugs assistance available for berthing subject to Pilots advice. Tugs can be ordered through Agents. Ship's lines normally used. When tugs are ordered in advance the cost will be charged to the vessel whether tugs are used or not.

BERTHING: Vessel will not be allowed to berth unless main engines and steering mechanism are in good working order. All vessels in port are required to fly their national flags between 0800 hrs. and sunset. On holidays and special occasions vessels may be expected to dress their ships if requested by Port Authorities.

The berths of the port with depths alongside up to 9.5 m. are equipped to handle general bulk and liquid (chemical products) cargoes, sugar, cement, metals, foodstuff, etc., as well as passenger traffic. Covered warehouses with mechanical equipment and concrete floor sheds are available.

STEVEDORES: Arranged by Agent on basis of Master's ETA. Loading and unloading is carried on throughout 24 hours a day including holidays.

CRANES: Loading and unloading is usually done by shore mobile electric cranes of up to 32 tons capacity, by floating cranes of up to 100 tons capacity and by other cargo handling equipment.

TANKERS: Tankers moor at berth No. 19, length 207 m., depth alongside 9 m. No slop facilities available. Tankers are normally required by the charter party to reserve a slop tank on board. Discharge of tank washings prohibited within 100 miles of the coast.

FRESH WATER: Supplied by pipe-lines at all berths.

FUEL: Bunkers are available and can be taken from the quays or delivered by lighters.

FIRE PRECAUTIONS: Masters of tankers are presented with a copy of Safety Regulations by the Agent on arrival.

GANGWAY/DECK WATCHMEN: Compulsory to maintain a gangway watch by ship's crew.

OPENING/CLOSING HATCHES: Normally opened and closed by ship's crew. In bad weather hatch covers are put on by stevedores.

CERTIFICATES: At first Russian port of call, certificates of tonnage and those required by international convention will be required for examination.

CUSTOMS ALLOWANCE: No restrictions on crew's consumption of tobacco and alcohol on board. It is forbidden to take these items ashore.

CONSULS: No local representation.

REPAIRS: Only minor repairs may be effected at machine shop ashore.

TIME: GMT plus 3 hours all the year round.

HOLIDAYS: All holidays are worked by stevedores.

TELEPHONES: Connection on board vessels can be made free of charge at berths number 7, 8, 9, 10, 13, 14, 15 and 16.

AUTHORITY: The Port of Tallinn Authority.

AGENT: The Port of Tallinn Shipping Agency "Inflot". 54-a Tuukri Street, 200106 – Tallinn, U.S.S.R. Cables: "Inflot", Tallinn. Telephones: 4-85-12; 4-88-25.

TUAPSE: 44.06 N. 39.04 E. (See Plan Book)

The port of Tuapse is situated between the mouths of rivers Tuapse and Pauk and the depths of 40 m. Year round navigation.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Compulsory in and out, possible at any time. Vessels await Pilot at anchorage. Pilots board and leave vessels in the outer roads behind the Pervomaisky Breakwater if the sea (swell) up to force 4. When leaving harbour during bad weather Pilot leaves vessels in the inner roads. Communication with Pilots on VHF channel 12.

ANCHORAGE: Depths up to 40 m. Position of anchorage, bearing to the entrance red light and distance is radioed by Harbour Master through Agent to each vessel prior to arrival (unless berth available). When at anchor, vessel shall keep VHF watch on VHF Channel 16.

MAX. SIZE: See "Berthing".

HEALTH: Sanitary officer boards on arrival or when berthed. No automatic free pratique. In the event of fever or any suspected epidemic disease onboard Masters shall inform the sanitary service immediately on arrival.

RADIO: All messages to Agent via Tuapse-radio, call sign UVW, calling frequency 500 kHz, working 430 kHz, A1, H24. VHF call sign "Tuapse-radio", calling 156.8 mHz (Channel 16), A3, H24, working frequency according to indication by shore radio operator. Phone connections to any port service.

Warning: Use of ship's MW and SW radio transmitters within 12 miles from the port is prohibited, except for distress, emergency and safety signals. When VHF unavailable, communication with UVW on MW band is allowed.

Arrival Advice: Masters shall send 96/72/48 and 24 hours ETA notices to "Inflot" agency, advising also quantity of ballast onboard and time required for deballasting ashore. Masters shall also advise quantity and grade of cargo, stowage plan, LOA and maximum draft, number of passengers, health condition of crew.

TUGS: Tugs are compulsory for berthing/unberthing or shifting, as well as when lying at inner anchorage. Tugs normally join vessels at the buoy marking the Pervomaisky breakwater. Ship's lines.

BERTHING: At any time with winds up to 12 m/sec. The port consists of 2 harbours, with 3 berths for dry-cargo ships (max. draft 11 m. (brackish water), LOA up to 220 m.) and 6 berths in the oil harbour for tankers (max. draft 12 m. (brackish water) LOA up to 250 m.). Oil harbour, shore cargo manifolds diameter 250/400 mm. All dry-cargo berths are equipped with portal cranes of 10 tons capacity. Loading/unloading usually by shore cranes. The port is not sheltered for vessels during strong S.E./S.W. winds. During strong gales from these directions lying in port is dangerous due to strong swell, especially the one called "tyagun" In this event vessels must leave harbour when recommended by the Port Authority. When lying in port the main engines shall not be immobilised without special permission by Harbour Master.

MEDICAL: First medical aid at any time; hospital facilities available.

DENSITY: 1011/1015.

FRESH WATER: Available from any berth, road delivery not possible.

FUEL: Fuel oil and gasoil available at oil berths or ex-lighters. Masters giving 72 hours notice.

FIRE PRECAUTIONS: Conventional rules for oil ports.

POLLUTION: Marine pollution shall be avoided by all means, specially due to proximity of health resort area. Any pollution is subject to heavy fines.

OPENING/CLOSING HATCHES: Normally by crew.

GANGWAY/DECK WATCHMEN: Not required. Gangways shall be lighted up and protected by nets.

CUSTOMS ALLOWANCE: No restrictions. Export/import of Soviet currency is forbidden.

IDENTIFICATION CARDS: Seaman's books are sufficient.

CONSULS: None.

REPAIRS: Emergency repairs. Floating docks subject to special arrangement.

REPATRIATION: Possible in emergency.

AIRPORT: Sochi – 120 km. Served by regular airlines.

TIME: GMT plus 3 hrs.

HOLIDAYS: 1st January, 8th March, 1st, 2nd May, 9th May, 7th October, 7th, 8th November. Work during holidays can be arranged.

TELEPHONES: Available for all vessels.

SURVEYORS: Leading world classification societies are represented by the Register of the USSR.

GENERAL: Deballasting or discharge of tank-washings facilities, craft for discharge of bilge water. Food waste and garbage, etc. shall be collected into special containers placed on board upon berthing. Laundry facilities. No boats, rafts, etc. shall be launched from vessels without special permission. All mooring ropes to be provided with rat-guards immediately upon mooring or shifting berths. Local representative of the Insurance Company of the USSR (Ingosstrakh) Ltd., and experts of the USSR Chamber of Commerce and Industry.

SERVICES: Compass adjusting and radar repairs.

SHORE LEAVE: Crew allowed ashore until midnight.

DEVELOPMENTS: Reconstruction works including dredging underway.

FIRE/AMBULANCE/POLICE: Telephones: Fire – 301; Fire-boat – 231; Ambulance – 003; Militia (Police) – 002. *Office hours:* 8 a.m. to 4 p.m., Saturday 8 a.m. to 2 p.m.

AUTHORITY: Tuapse Port Authority.

AGENT: "Inflot," Maritime Agency, 25, Gagarin Str., 352800, Tuapse. Cables: Inflot. Telex: 865. Phones: 71322, 71836, 71832, 71288, 71427.

VENTSPILS: 57.24 N. 21.32 E. (See Plan Book)

GENERAL: A Baltic Sea port, Ventspils is situated at the mouth of the Venta river. Navigation is all year round.

There are periodical alterations in the water level of the Venta river, chiefly due to the effects of the wind. The rise of the water level is usually due to moderate Westerly winds, and the fall is caused by Easterly winds.

The maximum rise of the water level in the Venta river is at the time of Spring floods.

The port of Ventspils comprises the Ventspils sea channel and a water area from the mouth of the Venta river up to the railway bridge. The port harbour can be entered by vessels with the maximum permitted draft in the bar approaching channel of 9.5 m. – along leading line No. 1 and 11 m. – along leading line No. 2 (at the datum at Kronshtadt for fresh water).

Since after strong gales depths of the approaching channel at the port entrance vary considerably due to alluvial of sand, the fairway of the channel is dredged from time to time.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Pilotage is compulsory both for entering and leaving the port.

Pilots board and leave vessels in the areas of Reception buoys "Ventspils-1" and "Ventspils-2". Pilot service is available round the clock when entering and leaving the port.

ANCHORAGES: Anchorage in the outer port road for vessels loaded with explosive or inflammable cargoes is allowed in area No. 86-a, for all other vessels – in area No. 86. Both areas are announced by the U.S.S.R. Notices to Mariners. Depths in the anchorage are from 15 m. to 18 m., the bottom is sand.

The Master of a vessel has to inform the Port Administration of the exact position of the anchorage stating the bearing and the distance from the North breakwater lighthouse.

The anchorage in the outer road is not safe during strong Westerly winds therefore vessels are recommended to drift while awaiting entry to the port or to go to sheltered places situated in the areas of the Kolkasrags point and the Gotland islands.

RESTRICTIONS: The maximum permitted length for vessels piloted through the Venta river channel is 185 m. when the draft is not more than 7.5 m. When a vessel's draft exeeds 7.5 m. her length should be not more than 160 m.

A valid ice-class certificate is required for entry to the port when the fairway is covered with ice.

When proceeding along the fairway and in the Venta river from the entrance to the Avant-port up to the railway bridge speed not to exceed 5 knots.

HEALTH: Pratique obtainable after mooring. Sanitary Inspector visits vessel after mooring together with Immigration and Custom House Officer. If medical care required the Sanitary Inspector has to be informed.

RADIO: Radio contact should be established via the Ventspils Radio port radio station which operates 24 hours a day on the following frequencies:

Call sign	*Frequencies (kHz)* *working*	*calling*	*Type of transmission*	*Time of work*
UNI	500	500	A1	H24
"Ventspils-Radio"	2182	2182	A3	H24
"Ventspils-Radio"–7	156.8*	156.8*	F3	H24
"Nadzor"	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

Vessels' traffic both in the roads and in the harbours is controlled by signals exhibited at the Signal Station located on the Pilot tower, at the base of the Southern mole.

TUGS: Use of tugs for vessels of 100 m. in length and over when mooring and unmooring at berths situated in the Venta river, as well as oil piers, is compulsory.

Normally tugs join vessels within the port area.

BERTHING: Berthing of vessels and shifting berths is carried out round the clock. Vessels having length over 140 m. and draft over 7.6 m. when approaching the port through the Venta river channel are allowed to enter or leave the port, moor and shift berth during the day only and when winds do not exceed force 5.

Cargo berths with depths alongside up to 10 m. situated on the right bank of the Venta river are equipped for handling general and bulk cargoes, metals and timber. Berths of the Avantport are equipped for handling crude oil and oil products. They can receive vessels with the maximum permitted draft of up to 11 m. (at the datum at Kronshtadt). There are covered warehouses and open concrete floor sheds in the port.

There are enclosed warehouses, open concrete floor sheds and a grain elevator.

Quays are equipped with electric cranes of up to 45 tons capacity. There are floating cranes of up to 100 tons capacity, cargo handling equipment for bulk cargoes and machinery.

Opening and closing of hatches is normally done by the ship's crew.

STEVEDORES: Master's and/or shipowner's information of cargo details, stowage – especially for ships with inward general cargoes – is required in proper time. Information has to be addressed to Inflot Ventspils.

MEDICAL: Hospital facilities available. Advance notice desirable, however depends on kind of sickness. Particular inoculations, vaccination/fever certificates etc. not required.

TANKERS: All grades oil loaded by shore loading hoses in diameter of 200, 250, 280, 300 and 350 mm. Total 4 berths all fitted with deballasting installation for slops. Max. draft from 30 up to 36 ft.

DENSITY: In port about 1,002.

FRESH WATER: Fresh water available, delivered from shore or by barge.

FUEL: All grades available subject to prior inquiry. Bunkers can be taken from the oil-jetty or supplied by lighters.

GANGWAY/DECK WATCHMEN: Service of watchmen recommended; however, Captain's option.

OPENING/CLOSING HATCHES: Opening and closing of hatches normally is carried out by crew; however, at the Master's request may be carried out by shore men.

CERTIFICATES: Required to be on board:
Intern. Tonnage.
Intern. Class.
Load-line.
Safety Equipment.
Intern. Radio.
Certificates of Deratisation.

CUSTOMS ALLOWANCE: There is no restriction for crew use and bond locker is not sealed.

IDENTIFICATION CARDS: Seaman's Book required.

CONSULS: No Consulates.

REPAIRS: Small deck and engine repairs can be carried out.

DRY DOCKS: None.

REPATRIATION: Repatriation of crew left behind a vessel in hospital is arranged by other tramp-ships with Captain's consent. No facilities exist for effecting crew changes.

TIME: GMT plus 3 hours. No alterations during year.

HOLIDAYS: 1st January (New Year's Day); 8th March (International Women's Day); 1st and 2nd May (May Day Holidays); 9th May (Victory Day); 7th and 8th November (The Great October Socialist Revolution Day); 5th December (The U.S.S.R. Constitution Day). Cargo work never stopped on Holidays.

POLICE/AMBULANCE/FIRE: If required have to be ordered through Maritime Agency "Inflot".

TELEPHONES: No arrangements exist for placing telephones on board.

SERVICES AVAILABLE: Tankers' deballasting installation for slops; service for radar and VHF repairs; compass adjusting; workshop for ordinary deck and engine repairs; ship chandler service; bunker supply.

SHORE LEAVE: Crew members allowed ashore.

SHIPMASTER'S REPORT: 1976.

Anchorages:

Tanker: bounded by positions,

57° 28.4′ N.	21° 27.3′ E.
57° 29.7′ N.	21° 29.2′ E.
57° 28.2′ N.	21° 31.2′ E.
57° 27.2′ N.	21° 29.3′ E.

Cargo:

57° 25.3′ N.	21° 26.8′ E.
57° 28.0′ N.	21° 26.4′ E.
57° 26.1′ N.	21° 29.0′ E.
57° 26.7′ N.	21° 25.8′ E.

Buoyage:

No. 2 B.W. Conical Fl. 5 sec. (Approx. pos. 57° 25.7′ N. 21° 29.85′ E. to be expunged.

New Buoys:

No. 2	Fl.W. 5 sec.	Pos.	57° 25.6′ N.	21° 28.3′ E.
No. 3	Fl.W. 3 sec.	Pos.	57° 24.1′ N.	21° 30.65′ N.
No. 4	Fl.R. 3 sec.	Pos.	57° 25.16′ N.	21° 30.82′ E.

In harbour; No. 4 Fl.R. Con. and Red Conical Buoy about 2 cables E × S to be expunged.

Oil Piers: 3 in number.
No. 1 pier, berths Nos. 28 and 29 light outer end Qk. Fl.W.
No. 2 pier, berths Nos. 30 and 31 light outer end Qk. Fl.Or.
No. 3 pier, berths Nos. 32 and 33 light outer end Qk. Fl. Blue.

Depths alongside:		
	Berth 28:	10.0 m.
	Berth 29:	10.5 m.
	Berths 30/33	11.5 m.

After dredging in channel is completed to 12.5 m., depth at berth 32 and 33 will be 12.5 m.

Oil Pier No. 3 (Bearings, distances and positions here not confirmed). Existing dock face continued 24.5° approx. 1,100 ft. to join Northern breakwater.

No. 3 runs 283° for 1,100 ft. from position 24.5°, 2,000 ft. from Fl. R.Lt. in 57° 01′ N. 21° 33.5′ E.

Northern Breakwater: Inner extension from pos. 57° 24.69′ N. 21° 32.2′ E. 012° for 890 ft. to join main breakwater.

Under Construction: 3 berths for Petro-chemical industry along inner face of Northern breakwater, depth alongside to be 12.5 m.

Small harbour beside Pilot station, Southern side, completed and in use by small craft and fishing vessels. Small repairs in operation. Depth said to be 3.5–4 m.

Port operation in foggy weather said to be controlled by radio and millimetre (aircraft) type radar installation, one scanner of which is situated on tower near root of Southern breakwater.

Tugs: Alleged that 5 are available; 1 icebreaker type of 2,500 h.p. 2 medium size, and 2 small, 1 at least of which was propelled by Voith-Schneider gear of about 750 h.p.

Pilots: To call Pilots, use Channel 16 and call Ventspils radio who make arrangements with harbour office and Agents (Inflot).

During time vessel de-ballasting and loading; any problems can be resolved by call to Agents through Ventspils Radio.

Regulations: Fire Officers demand that suitable bonding wire be fitted (supplied by ship). No shore facility available.

Facilities: No. 1 pier has (building) tower crane for handling hoses. Nos. 2 and 3 berths are fitted with loading arms hoses and towers. Fresh water available. Bunker fuel available but not necessarily Marine Diesel.

Cargo Berths: There are believed to be 8 dry cargo berths, within the river port area, some with cranes, suitable for general cargo, together with storage buildings. Refrigerated/chilled cargoes have been handled.

Max. Size: Pilot stated that tankers of up to 60,000 tonnes displacement were possible at present, and that after dredging it should be possible to take up to 100,000 tonnes displacement.

To contact Agents, call Ventspils radio on Channel 27 and they make arrangements.

AUTHORITY: The Port of Ventspils Authority.

AGENT: The Port of Ventspils Maritime Agency "Inflot". Postal address: 18 Dzintaru Street, Ventspils, U.S.S.R. Cables: "Inflot Ventspils". Tel. 6-12-13; 5-13-69. Telex: 122.

VOSTOCHNY: 42.44 N. 133.03 E.

New port being constructed. Log-loading berth understood to be in operation and a chip berth completed. Container and coal berths to be constructed, depths up to 17 m.

VYBORG: 60.43 N. 28.44 E. (See Plan Book)

For Saimaa Canal see Index.

GENERAL: A Baltic Sea port Vyborg is situated at the head of the Gulf of Vyborg in the N.E. part of the Gulf of Finland.

The port area consists of a harbour protected from the North by the Castle bridge passing over the strait nearby the Castle of Vyborg and by the Smolyanoy point – from the West.

The port is open for navigation from April up to the middle of December. Ice in the Gulf of Vyborg begins to form normally about the middle of November. The Gulf usually becomes frozen over by the middle of December and the last ice finally disappears in April.

Whilst tidal range in the Gulf of Vyborg is of small account, considerable changes in the water level may be caused by strong winds (up to 1.6 m.), variation in atmospheric pressure (up to 1 m.), and the seasonal increase of the amount of water brought down from the land. The rise of the water level is usually caused by Southerly, S.W. and sometimes by Northerly winds. The maximum range of the water level in the Gulf is about 2.0 m.

The Vyborg Fairway (least depth 7.3 m.) leads from the entrance to the Gulf of Vyborg across the Transund roadstead up to the entrance of the Inner Vysotsky Roads. The Vyborg Sea Channel (least depth 6.5 m.) leads from the Inner Vysotsky Roads into the port, situated at the head of the Gulf. Both of these and the Fairway and the Channel, are open for navigation any time of day or night.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Pilotage in the port area is carried out round the clock. It is compulsory for all types of vessels. Pilots board and disembark vessels in the following places:

1. At the port of Vyborg;
2. At the Reception buoy, 5.1 cables Westward of the Northern point of the Mayachny Island (pilot station of the Vikhrevoy Island);
3. At the Brusnichnoe Lock berth or in the Lock itself.

In the case of rough weather when safe boarding or disembarkation of a Pilot at the Reception buoy of the Vikhrevoy Island pilot station is impossible, a vessel, with the Master's consent, may follow a pilot boat, in the wake of it from the Reception buoy up to the Large Transund Roadstead or as the case may be, from the Large Transund Roadstead up to the Reception Buoy.

The radio communication between pilot boat and vessel is effected through VHF radio, Channel 12.

In case the Master of a vessel does not agree to follow a pilot boat, he can:

(a) When approaching the port from the seaward lie at anchor at the Reception buoy area until the weather changes for the better;

(b) When leaving the port for sea, anchor at the Large Transund Roadstead at a place indicated by the Port Administration and wait until Pilot is able to disembark at the Reception buoy area.

Vessels approaching the port from seaward should order a Pilot at the same time as they notify the Port Administration of the time of their arrival at the point of meeting a pilot boat.

ANCHORAGES: There are 5 anchorages at Vyborg Fairway and at Vyborg Sea Channel areas.

Two are situated at the Large Transund Roadstead area, one – at the Small Transund Roadstead, one – S.E. and one – N.W. of the channel. Anchorage positions are shown on the chart.

The holding ground in the anchorages is sand, mud, stone and clay. The depths are from 11 to 17 m.

RESTRICTIONS: Vessels are allowed to enter or leave the port when winds do not exceed force 6. During daytime, when a vessel's length is not more than 125 m. and her draft does not exceed 6.5 m. (at the Kronstadt datum);

At night time, when a vessel's length is not more than 105 m. and her draft does not exceed 6.1 m. (at the Kronstadt datum).

Before entering or leaving the port Masters of vessels having length and draft exceeding those indicated above must obtain the Harbour Master's permission.

HEALTH: International code quarantine signals to be shown on arrival. Vessels placed in quarantine will be instructed where to anchor by the Pilot station.

RADIO: Radio contact can be established through the Vyborg Radio port radio station operating 24 hours daily on the following frequencies:

Call sign	Frequencies (kHz) working	calling	Type of trans-mission	Time of work
UNN	500	500	A1	H24
	444		A1	H24
"Vyborg-Radio" (Port Control	156.7*	156.8*	F3	H24
"Vyborg-Radio" (pilot service of the Saimaa Canal)	156.6*	156.8*	F3	HX
"Ostrov Vikhrevoy" ("Whirlwind Island") pilot station	156.6*	156.8*	F3	HX
"Zaliv Novinskogo" ("Gulf of Novinsky") pilot station	156.6*	156.8*	F3	HX
"Vyborg-Radio" (Inflot Agency)	156.6*	156.8*	F3	H24

*Frequencies are given in mHz.

Every vessel whilst proceeding along the Fairways and the Channel must have VHF radio-telephone in good working order, being able to ensure a reliable radio contact with the port of Vyborg and between vessels. If a vessel is not equipped with VHF radio, a Master can hire a VHF portable radio-set from a Pilot station (via Pilot) for a fixed charge.

TUGS: Available, ordered through "Inflot".

BERTHING: Can only be effected with Pilot on board. Berths of the port with depths alongside of up to 7.8 m. are equipped to handle general and bulk cargoes, timber, etc., as well as passenger traffic. There are enclosed warehouses and open concrete floor sheds.

Berths are equipped with electric cranes of up to 10 tons capacity. There are floating cranes of up to 15 tons capacity and other cargo-handling equipment and machinery.

Opening and closing of hatches is usually done by the ship's crew, but if required it can be done by port labour for vessel's account.

MEDICAL: "Inflot" to be advised in advance if any medical attention required.

DENSITY: Salinity 5%.

FRESH WATER: Available. Can be supplied by pipe-lines at all berths or delivered by barges.

FUEL: Not available.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Usually opened and closed by crew. Can be operated by stevedores on request.

CUSTOMS ALLOWANCE: No control on board the vessel. It is forbidden to take alcohol off the ship.

REPAIRS: Minor repairs can be effected.

TIME: GMT plus 3 hours all year round.

HOLIDAYS: Cargo operations can be carried out on all holidays.

TELEPHONE: Connection to vessels is not possible.

SHORE LEAVE: Permitted subject to police control.

AUTHORITY: The Port of Vyborg Authority.

AGENT: The Port of Vyborg Maritime Agency "Inflot". Postal address: Inflot, PO Box 40, Vyborg, U.S.S.R. Cables "Inflot Vyborg". Tel. 52-01, 12-85 and 12-86. Telex 521.

YALTA: 44.30 N. 34.12 E. (See Plan Book)

GENERAL: An ice-free Black Sea passenger and commercial port, Yalta is situated at the head of Yalta Bay and on the Southern coast of the Crimea Peninsula.

The port is open for navigation all the year round.

The port is formed by a harbour protected by a mole. Depths in the harbour are up to 10 m.

Yalta is mainly a passenger port, but it is equipped to handle dry cargo vessels.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Pilot meets vessel in the outer roads, at a distance of 1 mile S.E. of Yalta lighthouse.

ANCHORAGES: The port outer roads are situated in Yalta Bay S.E. and Southerly of the port entrance. They are open to winds blowing between E.N.E. and S.W. At times vessels may be turned broadside to waves caused by Southerly winds.

A good anchorage may be obtained 5.5 cables S.S.W. off the head of the New Mole with depths from 15 m. to 17 m. The bottom is mud.

RESTRICTIONS: Vessels may enter or leave the port at any time of day or night. Vessels entering or leaving the port must have keel clearance of not less than 0.6 m.

MAX. SIZE: Permissible draft is 9 m., length 215 m.

RADIO: Ship-shore radio contact can be established through the port radio station Yalta Radio operating 24 hours a day on the following frequencies:

Call sign	Frequencies (kHz) Working	Calling	Type of trans-mission	Time of Work
UCD—9	500	500	A1	H24
Yalta Radio	2490	2100	A1	HX
Lazur (Port Control)	156.8*	156.8*	F3	H24

*Frequencies are given in mHz.

BERTHING: Cranes of up to 7 tons capacity are operated along cargo quays.

Handling of cargo at the passenger terminal is usually done by ship's cargo gear. A 5-ton shore crane may be ordered, if necessary.

TUGS: Tug assistance for mooring is compulsory. Masters of vessels entering the port must order at least 1 tug when mooring.

Masters of deep-drafted vessels must order a tug-boat when unmooring from berths Nos. 1, 3 and 5 if it is impossible to leave berth by drifting with the assistance of off-shore blowing wind.

FUEL: Not available.

FRESH WATER: Can be supplied by pipe-lines at all berths.

REPAIRS: Not available.

TIME: GMT plus 3 hours. (All year round).

AUTHORITY: The Port of Yalta Authority.

AGENT: A branch of the Port of Odessa Main Maritime Agency "Inflot" at the Port of Yalta. Postal address: 5 President F. D. Roosevelt Street, 334200 Port of Yalta, U.S.S.R. Cables "Inflot Yalta". Tel. 2-46-91. Telex 815.

ZHDANOV: 47.03 N. 37.31 E. (See Plan Book)

GENERAL: A sea port of Azov port, Zhdanov is situated 14 miles Northward of the entry into the Taganrog Gulf, at the Western end of it and at the mouth of the Kalmius river.

All-year round navigation is possible but during 30-90 days period of ice conditions with ice-breaker assistance for ice-strengthened vessels only.

Ice usually begins to form at the end of November or the beginning of December, and 3-4 weeks later the Gulf becomes completely frozen over. The increase of fast ice usually lasts up to the first half of February. As a rule the ice usually breaks up in the middle of March. It finally disappears at the end of March or, as an exception, in the first half of April.

The port of Zhdanov consists of the Outer and Inner Roads, the Ugolnaya (or the Coal) Harbour, the Grain Harbour, the Ship-repairing Basin, the Schmidt Harbour at the mouth of the Kalmius River, and the port of Azovstal situated Eastward of the mouth of the river.

DOCUMENTS: Refer to beginning of U.S.S.R. section.

PILOTAGE: Compulsory. Inform Kerch Harbour Master ETA 24 and 6 hours, off Kerch Strait. On arrival Kerch Pilot Buoy No. 21 (Lat. 45° 13′ 37″ N. Long. 36° 27′ 45″ E.), drop anchor and await Pilot; also keep continuous radio watch.

Not later than 4 hours prior to arrival at the mouth of the Coal Harbour approach channel, Buoy No. 16, a Master should order a Harbour Pilot.

ANCHORAGE: A good anchorage can be obtained in the outer roads of the port of Zhdanov situated opposite the port entrance. The depths in the roads are from 5 m. – 7 m. the holding ground is mud mixed with sand and shell.

RESTRICTIONS: Vessels can enter or leave the port at any time of day and night. All vessels entering or leaving the port should have keel clearance not less than 0.5 ft. (15 cm).

The max. allowed speed in the approach channels is 4.5 knots and in the part of the Coal Harbour approach channel, protected by a wooden dam, only 3 knots.

The speed of a vessel may be increased in case of necessity to keep her course along the leading line or prevent her drifting off the channel due to the effect of current or wind.

MAX. SIZE: Draft 7.7 m., length/breadth no restrictions.

HEALTH: After presenting Vaccination Certificates free pratique obtained. After proceeding from one port of U.S.S.R. to another free pratique obtained automatically.

RADIO: Vessels approaching the port of Zhdanov should establish radio contact through Zhdanov Radio port radio station operating 24 hours daily on the following frequencies:

Call sign	Frequencies (kHz) Working	Calling	Type of trans-mission	Time of work
UDC	500	500	A1	H24
UBN	12732 17085 22365.5	12550.5 16734 22247.5	A1	HX
UBN	8620	8363	A1	H24
"Zhdanov-Radio"	2182	2182	A3	H24
"Port-Control"	156.8*	156.8*	F3	H24
"Port-Nadzor"	156.8*	156.8*	F3	HX

*Frequencies are given in mHz.

RADAR: The port of Zhdanov radar station gives all possible information to any vessel navigating along the Coal Harbour approach channels in the restricted visibility and during the absence of the floating navigation marks.

Radar navigation is controlled by a Pilot in charge.

Storm signals are exhibited at a signal mast located at the Dividing Pier.

TUGS: Available. Use ship's lines. Tug assistance for shifting berths is compulsory. Number of tugs to be ordered shall be advised by Pilot.

BERTHING: The berths of the port with depths of up to 8.5 m. are equipped to handle general, containers, bulk and liquid cargoes, timber, metals, food stuff, fruit, vegetables, etc., and passenger shipping as well. There are enclosed warehouses, open concrete floor sheds and a grain elevator.

On the quays there are electric cranes of up to 15 tons capacity, coal and grain loaders. There are floating cranes with lifting capacity of up to 100 tons and other cargo handling equipment.

The Grain Harbour is bounded by two piers – by the Dividing Pier from S.W. and by the Eastern Pier from N.E.

It is protected from S.E. winds by the Inner Roads Breakwater. There are numerous piles and dolphins along the Eastern Pier. The depths in the central part of the Grain Harbour are from 8.7 m. to 9.1 m.

The Schmidt Harbour is situated at the right bank of the mouth of the Kalmius River, at the S.E. outskirts of the town of Zhdanov. It is used by small vessels. The access to the Schmidt Harbour is by an approach channel dredged in the coastal shoal water. Navigation along the channel is ensured by leading lights.

Storm signals are shown at the station situated Southward of the entry to the Schmidt Harbour.

When proceeding to the Inner Roads through the shoal water vessels should use approaching channels leading to the Coal Harbour and the Avant-port.

The Coal Harbour approach channel is the main fairway for entry to the port of Zhdanov. It passes through a coastal shoal then enters the Southern part of the Coal Harbour.

Navigation along the Avant-port and the Coal Harbour approach channels is also ensured by leading lights, light buoys and spar buoys.

The access to the port of Azovstal is by a channel branching off N.E. of the Coal Harbour approach channel.

MEDICAL: Masters to advise by radio prior arrival of medical attendance required on board. Hospital facilities available. Vaccination Certificates to be presented.

DENSITY: About 1005.

WEATHER: The changes in the water level is mainly caused by effects of the wind, observed here all the year round. The fall of the water level is usually caused by Northerly and N.E'ly winds but rises of the water level are due to S.W'ly winds.

The range of the water level observed in the Gulf is about 1 m.

Changes of the water level can also be caused by variation in the atmospheric pressure, so called "Seish" effect. The "Seish" usually starts during calm weather and can last, on average, for about 24 hours.

The maximum range of the water level due to the "Seish" effect observed in August is about 0.6 m.

FRESH WATER: Delivered at berth. Also delivered by lighters.

FUEL: Supplied from the quays, and also delivered by lighters.

OPENING/CLOSING HATCHES: Crew allowed open and close, stevedores placing beams.

CERTIFICATES: Registered Tonnage Certificates required.

CUSTOMS ALLOWANCE: No quantity restrictions. Nothing to be taken ashore.

IDENTIFICATION CARDS: Not required.

CONSULS: None.

REPAIRS: The ship-repairing Basin is situated in the Northern part of the Inner Roads. It is bounded on the S.W. by the Eastern Pier and on the East by the Eastern Dam. The entrance to the Basin is situated between the heads of the Eastern Pier and the Eastern Dam. The depths in the Basin are from 6.1 m. to 6.5 m.

All kinds of repairs for vessels of up to 9,000 tons d.w.t. can be carried out.

DRY DOCKS: 2,500 and 5,000 tons.

REPATRIATION: All facilities for repatriation subject to visa formalities.

AIRPORT: 15 km. from port with regular airlines.

TIME: Local time GMT plus 3 hours (All year round).

HOLIDAYS: 1st January; 1st, 2nd, 9th May; 7th, 8th November; 5th December.

AMBULANCE/FIRE: Ambulance 025; Fire 01.

TELEPHONES: Can be placed on board.

AUTHORITY: The Port of Zhdanov Authority.

AGENTS: Zhdanov Main Maritime Agency "Inflot", 99 Admiral Lunin Prospect, 341010, Zhdanov, Donetsk Region, U.S.S.R. Tel: 5–10–34, 5–85–79. Cables: Inflot Zhdanov. Telex: 195.

NOTES

Please also advise Shipping Guides Ltd.

United Arab Emirates

ABU AL BU KHOOSH: 25.26 N. 53.08 E.

(See Plan Book)

LOCATION: The terminal is bounded by the following co-ordinates South of Sassan Oil Field.

(a) 25.31 N. 53.05 E.
(b) 25.29 N. 53.12 E.
(c) 25.26 N. 53.05 E.
(d) 25.26 N. 53.12 E.

Anchoring is prohibited within this area.

DOCUMENTS: Total ABK do not act as Agents. Vessels must have an Agent in Abu Dhabi in case of injuries or illness.

Early departure procedure: At the Master's option, he may, in order to expedite the turn-round of vessels and avoid undue delays caused by weather or other circumstances, use the early departure procedure. In this case Masters are requested to sign blank cargo documents.

Normally completed cargo documents required by the Master will be placed on board prior to sailing. If this is not possible without incurring delays of undue nature, the relevant documents will be airmailed to the Master to await the vessel's arrival at discharge port.

The official cargo, quantity loaded, will be transmitted by radio whilst unmooring. In the event of a dispute, the receipt of a letter of protest will be acknowledged by the Mooring Master.

Any protests by the Master concerning the quality of cargo should be made before departure and any resulting investigation should be made before the vessel sails.

Outward clearance: A tanker will be considered clear to depart Total ABK Terminal when the crude oil loading documents have been delivered to the Master, or in the case of E.D.P., clearance will be given through the Mooring Master.

Mail: Official ship's mail and the crew's personal mail will be handled by Total ABK and shipowner's debited accordingly.

PILOTAGE: Compulsory within the Terminal limits. Vessels to be moored at Total ABK Terminal will be boarded by a Total ABK Mooring Master in the anchorage area. The Mooring Master will advise the ship's Master on approaches to the storage tanker, mooring and unmooring, connecting and disconnecting hoses and all other operations within the Terminal area including all manoeuvring of the vessel. A qualified deck officer must be on watch at all times while the vessel is alongside the storage tanker.

ANCHORAGE: An area immediately South of Terminal limits is designated as the Anchorage Area, centred on position: 25° 26′ N., 53° 08′ E. This co-ordinate represents the centre of a circle with a radius of 0.5 mile which must be used by vessels requiring to wait at anchor. Anchoring within the Terminal limits is strictly prohibited.

NAVIGATION AIDS: The S.P.M. is fitted with a white light flashing the morse letter "U" every 30 seconds visible for a distance of 5 miles. A platform AK1 is situated in position 25° 29′ 30.5″ N., 53° 09′ 02.3″ E. and another in position 25° 29′ 37.5″ N., 53° 08′ 43.4″ E. which shows 2 flares in the N.E. direction (approximately) 10 m. and 600 m.

MAX. SIZE: Max. 270,000 d.w.t. Depth of water 29 m.

RADIO: Initial communication between vessels and Total ABK should be via Bahrain Radio (call sign GOU) which operates on a 24-hour basis. ETA in GMT to be sent 72, 48 and 24 hours prior arrival, through Bahrain Radio.

Communications within 60 miles of Terminal: Once ships are within 60 miles of ABK Terminal, communication may be established by radio telephone on International Marine VHF Channel 8. This frequency is monitored continuously.

Once contact has been made on Channel 8, further conversation should be conducted on either Channel 14 (156.7 mc/s), Channel 12 (156.60 mc/s) or Channel 15 or 17.

Communications after Total ABK Mooring Master has boarded: A Total ABK Mooring Master will board incoming tankers in the anchorage area and will bring with him portable VHF radio telephone units. From that time onwards, all and any communications between ship and the storage vessel will be conducted by the Mooring Master.

Radio transmissions for advice of tanker arrivals: Telegram to be sent by the storage tanker to the export tanker about 80 hours before her arrival:

Please advise your ETA in GMT 72, 48 and 24 hours before arrival to Total ABK Abu Dhabi, Telex AH 2347, via Bahrein Radio stop Cargo requirements stop Deballasting time if any stop Maximum loading rate acceptable stop Distance in metres from bow to manifold stop Flange dimensions of vessel's manifold connection stop 50 miles before arrival please contact terminal by VHF Channel 8 to receive berthing instructions stop Total ABK.

Mooring instructions: If vessels are obliged or instructed to anchor, they should do so in the recommended area about 3 nautical miles from the storage vessel.

TUGS: Two tugs, each with 72 tons bollard pull are employed by the export tanker when berthing alongside the storage tanker.

READINESS: After arrival at the anchorage area and when the tanker is ready in every respect to load, the Master may tender his notice of readiness.

Notices of readiness will be accepted provided one or other of the following events shall have transpired: (a) the Master shall have received the Mooring Master on board, or (b) the Master shall have dropped anchor in the anchorage area.

Port closed: Notices of readiness will not be accepted during periods when the port is closed. The port is closed when the weather is such that it is too rough for incoming tankers to berth. The decision regarding the opening and closing of the port will rest with the ABK Terminal Superintendent or his deputy.

MOORING: Weather permitting, Total Abu Al Bu Khoosh Terminal operates only from sunrise to sunset, 7 days a week. Vessels moor port side to the storage tanker "Jaranda" equipped with 5 Yokohama fenders on her starboard side, which is moored to the S.P.M. Launch may assist in berthing vessels under the direct control and supervision of the Mooring Master.

Preparation for mooring: Vessels are requested to have, on their starboard side, a Pilot ladder and/or Pilot hoist or accommodation ladder safely and securely rigged for immediate use and long enough to reach the Mooring Master's launch. Vessels will provide a lee for the Mooring Master on the starboard side both when boarding and leaving.

For vessels with a freeboard of 30 ft. or more, the accommodation ladder shall be rigged out, lowered down so the platform is not more than 10 ft. from the water level and a short pilot ladder, rigged to cover the access to the platform. Tankers are requested to have ready on the forecastle, 2 head lines, polypropylene if possible.

Tankers are requested to have ready on the port side amidships a derrick rigged and ready to pick up the hoses (16 in. diameter).

Hoses: The hoses shall be hoisted by the storage tanker's crane, but connected by ship's crew. The Mooring Master will advise the ship's Officer in charge concerning lifting techniques.

LOADING: All communications relative to the loading of the vessel shall be routed through the Mooring Master who will remain in contact with the storage tanker constantly via portable VHF units. In case of temporary breakdown of the portable VHF circuit, contact may be continued on International Marine Channels 16, 14 or 8.

Failure of communications: Should all communications with the storage tanker fail, loading will cease immediately.

Emergency shut down: An emergency cessation of loading may be effected by use of the ship's VHF Channel 16.

Loading rates: Maximum loading rate will be 6,000 m.t.p.h.

Gases: ABK crude oil contains H_2S (sulphurated hydrogen). This gas quickly deadens the sense of smell so that a dangerous concentration cannot be detected by odour. During loading, gas should be vented off through the tanker's normal venting system. Personnel engaged in ullaging tanks should keep to windward and avoid breathing fumes as much as possible. Resuscitators, breathing apparatus and life-lines should be readily available.

Valve closure against high-speed loading; No valve which will stop or seriously impair or reduce the flow rate of oil from the storage tanker are to be operated without prior agreement with the Mooring Master. The practice of throttling back on the ship's cargo valves is to be avoided. If a lower rate is required, the storage tanker is to be advised and the pumping rate will be reduced to the required level. The Master will be held liable for any damage arising from the sudden cessation of flow caused by default of the ship. It cannot be over emphasised that to do so can be extremely dangerous and cause extensive damage to equipment.

BALLAST: Due to the exposed location of the crude oil loading berth, vessels are required to carry sufficient ballast for safe handling, having due regard to existing weather and sea conditions. A vessel found by the Mooring Master to be not adequately ballasted will be rejected.

Clean ballast; As there are no ballast discharging facilities, vessels must arrive at the Terminal with clean ballast, ensuring that all pipe-lines, pumps and strainers have been flushed out prior to arriving. The Mooring Master will inspect ship's ballast on boarding and has the power to reject any vessel that he thinks would cause pollution of the sea area, in which case vessel must proceed to sea and return only when ballast is completely free of oil. Any vessel rejected because of dirty ballast will automatically nullify its Notice of Readiness and will lose any priority of position for loading. Ballast discharge should not be commenced without the prior agreement of the Mooring Master.

Inspection during loading: At night the sea around the vessel shall be adequately lit, as frequent inspection by the Mooring Master will be made during the discharge of ballast. Any pollution whatsoever will be cause for rejection. Similarly, any hull leaks causing pollution during loading will be cause for rejection and the vessel will not be re-accepted unless satisfactory evidence of repairs has been certified by a qualified surveyor.

MEDICAL: Medical and dental services are not available at the Terminal. In emergencies requiring hospitalisation, the patient will be hoisted to the helideck on the storage tanker and flown by helicopter to Dubai or Abu Dhabi.

FRESH WATER, FUEL, ETC.: Bunkers, fresh water, stores, boats for hire, repair facilities, facilities for changing ship's crew are not available at the Terminal.

SHORE LEAVE: Not possible.

GENERAL:

Radio equipment: Radio, radar or other electric equipment must not be energised while the vessel is alongside the SPM except VHF radios, telephone and communications equipment approved by the Terminal.

Repairs; While berthed at the Terminal, the ship's boilers, main engine, steering machinery and other equipment essential for manoeuvring shall be maintained in a condition to permit the ship to move away from storage vessel at short notice. Repairs or other work which may immobilise the ship should not be undertaken without prior arrangement with the Terminal.

Port Charges: Every vessel loading in the Abu Dhabi areas has to pay Abu Dhabi Government Port Dues. These are calculated according to Abu Dhabi Law.

SHIPMASTER'S REPORT: 1977: The following information may be of value to other Masters:

a. The holding ground in the anchorage is very bad, this vessel dragged her anchor (10 shackles out) in a Force 5 from the N.W.

b. Only documents supplied on departure were Bills of Lading, *no* port clearance documents supplied.

c. No Customs or Immigration Officials at terminal therefore no documents required.

d. Storage tanker holds 220,000 metric tons. She loads at a rate of 11,000 tons per day from the SPM.

SHIPMASTER'S REPORT: 1978: The storage tanker is about 800 ft. long (244 m.). On this vessel the centre of the manifold was 129.6 m. from the bow. We berthed with our bows level which meant our stern overhung the other vessel and we were not able to use our first ropes ashore leading from the after end of the poop.

Forward: (SV=Storage vessel). 2 headlines to SV. 1 spring to SV. One rope from SV with end to be turned up on own vessel's bits forecastle head. Two more headlines to SV and 1 spring from SV.

Aft: 2 sternlines to SV. 1 backspring to SV. 1 backspring from SV, eye on bitts. 2 more stern lines to SV.

OPERATORS: Total ABK – Abu Dhabi. Telex AH 2347.

ARZANNAH ISLAND: 24.47 N. 52.24 E.

A lighterage jetty is under construction in position 24° 46′ 56″ N., 52° 23′ 47″ E. with following dimensions which is expected to be ready by end of March, 1979.

Length 750 ft., width 100 ft., and depth alongside 20 ft.

Depth of water in the surrounding area is 4 ft. to 15 ft. to 1300 ft. offshore. Max. tide range is 6 ft. tide cycle 24 hours.

A temporary 180 ft. long slipway now in use with a channel depth of 18 ft.

Navigational lights presently available only on well jackets and production jackets near South end of island. Navigational lights are allocated but for the time being not established.

AUTHORITY: Amerada Hess Oil Corporation of Abu Dhabi.

AGENT: See "Mina Zayed".

DAS ISLAND: Abu Dhabi, 25.09 N. 52.52 E. (See Plan Book)

Conduct and movement of vessels within the port are controlled by the Harbour Master (Abu Dhabi Petroleum Ports Law No. 12 of 1973).

DESCRIPTION: Das Island lies some 100 miles N.W. of Abu Dhabi City, in the State of Abu Dhabi, largest of the United Arab Emirates. The island is the base for the export of crude oil by Abu Dhabi Marine Operating Company (ADMA-OPCO), and liquefied gas and by-products by Abu Dhabi Gas Liquefaction Company Ltd (ADGLC).

DOCUMENTS:

Bills of Health for Ports visited on voyage.

2 Crew Lists.

3 Manifests (1 original and 2 copies).

1 International Maritime Declaration of Health.

APPROACHES AND PROHIBITED ANCHORAGES: Umm Shaif and Zakum drilling areas situated some 20 miles East and 48 miles S.E. of Das Island. Bundug oil field lies approximately 15 miles West of Das Island. Together with their associated pipe-lines to Das are marked on the Admiralty Charts. Only selected towers equipped with lights, all other wellheads, drilling rigs and towers within drilling areas are unlighted. Unburied pipe-lines from wellheads to Island also in this area and *it is essential* that vessels do *not* steam into or anchor in it. Cautions have been issued in Notices to Mariners warning vessels against entering both Umm Shaif and Zakum areas and against anchoring in vicinity of Zakum Pipe-line.

Southern Route. Vessels should normally approach port from South and must pass not less than 3 miles South of drilling rigs and towers in Umm Shaif area, thence towards S.E. corner of Island. Vessels must leave port by this route unless they have to use Northern buoyed channel.

Northern Route: Using N.E. Buoyed Channel.

Is via buoyed channel, recently re-routed, details of the buoy stations and positions are:

Buoy No.	*Colour and Daymark*	*Position:*	*Light Characteristic:*
1	Black Conical	25° 27′ 27″ N. 53° 23′ 12″ E.	Fl. W. ev. 5 secs.
2	Red Can	25° 25′ 49″ N. 53° 23′ 25″ E.	Fl. R. ev. 5 sec.
2A	Red Can	25° 24′ 49″ N. 53° 17′ 12″ E.	Gp. Fl. (2) R. ev. 10 sec.
3	Black Conical	25° 25′ 13″ N. 53° 12′ 21″ E.	Qk. Fl. W.
4	Red Can	25° 24′ 14″ N. 53° 12′ 43″ E.	Fl. R. ev. 2 sec.
5	Black Conical	25° 23′ 54″ N. 53° 10′ 26″ E.	Fl. W. ev. 5 sec.
6	Red Can	25° 21′ 52″ N. 53° 09′ 59″ E.	Fl. R. ev. 5 sec.
7	Black Conical	25° 20′ 35″ N. 53° 04′ 54″ E.	Qk. Fl. W.
8	Red Can	25° 19′ 09″ N. 53° 06′ 02″ E.	Fl. R. ev. 2 sec.
9	Black Conical	25° 14′ 12″ N. 52° 56′ 48″ E.	Gp. Fl. (3) W. ev. 8 sec.
10	Red Can	25° 14′ 49″ N. 52° 58′ 54″ E.	Fl. R. ev. 3 sec.
11	Black Conical	25° 09′ 47″ N. 52° 54′ 06″ E.	Fl. W. ev. 2 sec.
12	Red Can	25° 11′ 11″ N. 52° 55′ 07″ E.	Qk. Fl. Red.

In addition to the buoys in the channel an additional buoy has been established approximately 1.6 miles North of Jazirat Das to mark the oil flare pipe complex. Details are:

Flare	Black Conical	25° 11.5′ N. 52° 52.3′ E.	Fl. W. ev. 5 sec.

Northern Route – Approach Das Island from Northwards. Keeping 4 miles to Westward and 5 miles to Southward until arrival Pilot station situated 2 miles S.E. of Southern loading terminal. Beware of submerged wreck with least depth 35 ft. over it in 25° 04′ N. 52° 52′ E.

PILOTAGE: Berthing Master will undertake pilotage, berthing and unberthing of tankers save that Master shall remain solely responsible on behalf of owners for safety and proper navigation. Berthing Master will normally board vessels approaching Das Island by Southern Route approximately 2 miles S.E. of Southern loading terminal (Berth 1). When approaching Das Island by Northern Route via buoyed channel Berthing Master will board from position between Nos. 12 and 11 Channel buoys. If adverse weather prevents boarding in this position Berthing Master will board in lee of Das Island. Vessels requested not to navigate at greater distance than 1.5 miles off Das Island when passing through cautioned area Eastwards of Das Island where anchoring is prohibited.

ANCHORAGES: Main anchorage for dry-cargo vessels is in about 40 ft. of water, approximately 0.5 mile from Harbour entrance South of tanker loading berth. Other anchorages for dry-cargo vessels lie to S.W. and West of the Island. Tankers should normally anchor approximately 1.5 to 2 miles S.E. of the Southern loading platform, should a berth not be immediately available.

Vessels should avoid anchoring in vicinity of submarine pipe-lines established to Eastward of Das Island.

Sea bed all round Island is rock, covered with a few inches of loose sand. Holding is poor and vessels are advised to pay out at least 60 fathoms of chain. Vessels at anchor, awaiting berths, lighters or any services provided by the port must at all times keep a listening watch using Channel 16 where possible. If a vessel is not equipped to operate on this Channel then any of the frequencies may be used by arrangement.

MAX. SIZE: No. 1 Tanker Berth is suitable for berthing tankers in ballast condition up to 90,000 Summer d.w.t. and when fully loaded up to 50,000 d.w.t. Minimum depth of water alongside the berth is 54 ft.

No. 2 Tanker Berth is suitable for berthing tankers in ballast condition up to 260,000 Summer d.w.t., fully loaded tankers of up to 130,000 d.w.t. and partially loaded tankers of up to 165,000 tons displacement with mean draft not exceeding 56 ft. Minimum depth alongside is 67 ft.

No. 3 Tanker Berth is suitable for berthing tankers in ballast condition up to 410,000 d.w.t. and with a loaded draft not exceeding 79 ft.

No. 4 LNG/LPG Tanker berth is suitable for berthing vessels up to 100,000 tons displacement with a mean draft not exceeding 47 ft.

Minimum depth of water alongside is 49 ft. The liquid part of the loading platform has 16 in. loading arm and an 8 in. bunkering point.

LNG loading rate 4,000 t.p.h. max. through 2 lines.

LPG loading rate 2,000 t.p.h. max. through 1 line.

Pentane Plus loading rate 2,000 t.p.h. through 1 line.

There are 7 mooring dolphins fitted with triple release hooks.

There are 6 berthing dolphins fitted with double release hooks. Each hook being of 100 metric tons capacity.

WEATHER AND TIDE: Prevailing winds are from the N.W. The rise of the tide can be up to 5 ft., usual variation is 3 ft.

HEALTH: Vessels arriving at Das must carry the usual Bills of Health for ports visited on the voyage. Masters of vessels are requested to inform Abu Dhabi Marine Operating Company (ADMA-OPCO) if there is any person ill on board or if there has been sickness within the week prior to arrival. Pratique is granted by the Port Medical Officer through the Berthing Master or Agency Clerk.

Health Certificate with valid smallpox inoculation is compulsory and cholera inoculation (if coming from cholera-infected areas).

RADIO: Das Marine listens on VHF Channel 16.

Ship-to-Shore Radio communication from visiting vessels is channelled through Das Marine via. VHF Channels 6, 8, 9, 11, 12, 13, 14, 16, 18, 20 and 22. All other communication other than terminal VHF should be directed through Bahrain's Cable and Wireless Station.

All vessels bound for Das Island should give 72 hours notice of ETA via. Cable & Wireless Bahrain.

Das Island Radio Mast: A new radio mast has been installed on Das Island.

Geographical: Latitude 25° 08′ 30.396″ N.
Longitude 52° 52′ 43.903″ E.

Red lights visible all round the horizon have been established on the top of mast.

The original radio mast on the N.E. corner of Das Island has been demolished.

Arrival Messages: In the event of difficulties this information should be transmitted to Das via the Cable Wireless Station at Bahrain. As soon as direct contact is established between a vessel and Abu Dhabi Marine Operating Company (ADMA-OPCO) Radio Station, the latter will advise the route to be followed in approaching the Island.

Tankers when arriving to berth at the SBM from N.E. Buoyed Channel will receive from Das Marine a cable worded as follows: "Approach Das Island via. N.E. Buoyed Channel and when clear of Inner Buoys proceed direct to Pilot station situated 2 miles S.E. of South loading platform. Ship's derrick should be rigged on the portside. Advise soonest SWL of hose handling derrick or crane also confirm that you have a suitable fairlead forward of at least 26″×20″. Have ready on forecastle head one ships mooring rope, 120 fathoms in length. Ship's manifold should be ready to connect 2 × 16 in. BS cargo hose and 1 × 10 in. BS bunker hose.

Boat rope required along portside at manifold position. Accommodation ladder rigged starboard side. Mooring and hosing up by ship's crew. We request that cabin is available for Berthing/Loading Master who will remain on board throughout period in port. Mooring and hosing equipment is lifted on board when Berthing Master boards. Please ensure crew and port derrick ready and good lee is given. VHF Channel 16 available".

TUGS: Tugs provided by Abu Dhabi Marine Operating Company (ADMA-OPCO) must be used by all tankers when berthing and unberthing.

BERTHING: Full power must be available on main engines during berthing operations. Berthing Masters will not berth vessels if not properly equipped with satisfactory mooring lines, or if deck appliances inoperable, or if steering gear, telegraphs and whistles not in an efficient condition. Master should notify Berthing Master of any defects or peculiarities of vessel.

No. 1 Berth: No. 1 Tanker Berth approximately 0.75 mile off East coast of Das Island is served by submarine pipe-line from tankage on Island. Tankers berth against 4 flexible dolphins which protect berth operating platform. Six mooring dolphins are each provided with twin bollards. Hooks for backsprings located on operating platform are each equipped with 48 ft. length of 18 in. cable-laid manilla spring. Loading installation comprises 4 booms each equipped with 10 in. bore flexible hose for loading crude oil. Two similar booms available for loading and discharging bunkers. Fittings available to connect these hoses to 8 in., 10 in. and 12 in. manifolds to ASA 150 or BS 1560 – 1968, ASA 300 or BS. "H" details.

No. 2 Berth: No. 2 Tanker Berth is sited to the North of No. 1 Tanker Berth. It is of similar construction to No. 1 berth except that quick release hooks are provided on the mooring dolphins and on the breasting dolphins for securing vessels' backsprings. The loading installation comprises 4×16-in. booms with 16-in. hoses for crude oil loading, and 2×12-in. booms with 10-in. hoses for bunker loading. Fittings are available to connect to 4-in., 5-in., 6-in., 8-in. and 10-in. manifolds for crude oil loading with flanges to BS., ASA and metric standard details.

No. 3 Berth: No. 3 Berth is a Single Point mooring buoy and is situated approximately 7,500 ft. East of the East coast, in position Lat. 25° 08′ 53″ N., Long. 52° 54′ 07″ East.

The moorings for tankers are comprised of 2×15-in. circumference floating nylon ropes, terminating in a 3.75 in. dia. stud link chafing chain which is secured to the tankers forward mooring bitts using a 15-in. circumference nylon snotter. This equipment is provided by the Company.

The loading installation comprises 2×20-in. diameter floating hose strings terminating in 16-in. diameter tail hose for crude loading. For bunker loading and discharge 1×16-in. floating hose string, terminating in 1×10-in. tail hose, is provided. The flanges are to BS 1560.

Vessels using this berth will be required to be fitted with a bow fairlead on or near the centre line to accept the chafing chain. The minimum aperture dimensions are 24 in. horizontally and 18 in. vertically to permit direct connection. Alternative arrangements are provided for mooring vessels with smaller size apertures. However, this could result in delay, subject to weather conditions.

Vessels also require a derrick or crane capable of plumbing at least 2 ft. outboard of the ship's side over the entire length of the port manifold (including the bunker connection if required). SWL of the crane/derrick to be in accordance with the following requirements:

Less than 45,000 tons Summer d.w.t.	7 tons SWL
45,000 – 100,000 tons Summer d.w.t.	8 tons SWL
Over 100,000 tons Summer d.w.t.	10 tons SWL

Berths cannot be occupied during adverse Easterly weather. Loaded tankers only berthed at discretion of Port Officer and delays from tidal conditions, awaiting daylight, etc., may be incurred. Minimum acceptable length overall 525 ft. Vessels other than craft must not approach nearer than 2 miles to premises without a Berthing Master on board unless otherwise instructed by Port Officer. In approaching and leaving berths it is essential to avoid anchoring in area of submarine pipe-lines which run in approximately East and West direction some 2,500 ft. North of No. 2 berth. Weather and other conditions permitting, tankers can berth and unberth at all times. Every vessel berthing must fit adequate rat guards to all mooring ropes and wires.

GENERAL CARGO OPERATIONS:

(a) Declaration of Dangerous Cargo: Any dangerous cargo, whether intended for Das Island or not, must be declared to the Harbour Master, on arrival.

(b) Discharge or Loading of Dry Cargo: Cargo vessels discharge in the anchorage into barges using their own gear, and should arrive with derricks rigged.

A series of dumb barges (average capacity 120 d.w.t.) are normally available for landing all cargo. Charges are usually made for stevedoring services up to under ship's tackle and for supplying tally clerks on board the vessels.

For the handling of cargo, a labour force of up to 50 men is usually available.

Whenever possible, the island craft will come alongside immediately a vessel anchors and the Cargo Superintendent will board and discuss handling procedure with the Chief Officer. Discharge of cargo is carried out continuously provided weather and other conditions permit.

Vessels may be asked to provide winchmen.

(c) Cargo Manifests: 1 original and 2 copies of general cargo manifests are required.

LOADING: 2 grades of crude are available on each berth. Zakum Crude average API 40.5 and Umm Shaif Crude with average API 37.5.

Loading: Loading will not commence until the ship's loading officer reports the ship ready for loading and the shore loading staff are satisfied with the connections and preparations made for loading.

Loading and Discharging Rates:

No. 1 Berth

Crude oil loading maximum 5,000 t.p.h. with a maximum of 1,250 t.p.h. through each hose

Bunker discharging	1,800 t.p.h. approximately
Bunker loading	650 t.p.h. approximately

No. 2 Berth

Crude Oil loading	10 – 12,000 t.p.h. approximately
Bunker discharging	2,000 t.p.h. approximately
Bunker loading	750 t.p.h. approximately

No. 3 Berth

Crude Oil loading	10 – 12,000 t.p.h. approximately
Bunker discharge	2,000 t.p.h approximately
Bunker loading	1,000 t.p.h. approximately

The permissible maximum loading rate is entirely at the Company's option and will vary according to the circumstances and the type of tanker concerned, subject always to the Master's over-riding discretion.

Pumping Signals: Pumping Operations are controlled by a cable signalling system between the berth operating platform and the Control Room on the Island. The platform is also linked to the Island Automatic Telephone Exchange.

At No. 3 Berth, pumping operations are controlled by portable VHF radio telephone between the vessel and the Control Room on the Island.

BALLAST: There are no facilities for receiving vessels ballast ashore for treatment. All vessels must have clean ballast for overboard discharge.

Vessels using No. 3 Berth will be required to deballast and load simultaneously so that in normal circumstances they will not be flying light whilst moored at the buoy. It is therefore essential that the Company be promptly informed should the vessel be unable to deballast and load simultaneously without risk of admixture.

MEDICAL: Medical Officer resident on Island and Abu Dhabi Marine Operating Company (ADMA-OPCO) maintain small hospital. Medical attention only available in case of serious illness or emergency.

FRESH WATER: Not available.

FUEL: Medium fuel oils available from shore storage. Average API 17.5 and maximum viscosity 1,500 seconds Redwood.

FIRE PRECAUTIONS: Three fire-fighting tugs available.

GANGWAY: Shore gangways provided on No. 1 and No. 2 Tanker Berth and the new LNG/LPG berth.

CUSTOMS ALLOWANCE: No restrictions for tobacco. Conveyance of alcoholic liquor from any vessel to the shore or from the shore to any vessel, or from one vessel to another, is prohibited.

CONSULS: HBM Hon. Consul, Marine Department, Abu Dhabi Marine Operating Company (ADMA-OPCO), Das Island, Abu Dhabi. Tel. 546, Cables, Admarine Das Bahrain.

REPAIRS: Not available.

DRY DOCKS: None.
REPATRIATION: Not allowed unless an extreme medical case.
AIRPORT: ADMA operated private Airport.
TIME: GMT plus 4 hours.
POLICE/AMBULANCE/FIRE: Tel. Police 385; Ambulance 300; Fire 400.
SHORE LEAVE: Not permitted.
AUTHORITY: Marine Superintendent Das, Abu Dhabi Marine Operating Company (ADMA-OPCO), Das Island.
AGENT: *Dry Cargo:* See "Mina Zayed".

Tankers: National Shipping, Gulf Agency Co. (Abu Dhabi) Ltd. act as protecting Agent only.

DUBAI (Including Khor Dubai and Hamriya Port): 25.16 N. 55.18 E.

ALSO SEE "PORT RASHID".
COURTESY FLAG: UAE and Dubai.
PROHIBITED AREA: Work on the construction of the Dubai dry dock has commenced and all shipping is warned to keep clear of an area contained within a line drawn from Port Rashid Main Light (Lat. 25° 16.0′ N., Long. 55° 16.2′ E.) to a position (Lat. 25° 16.2′ N., Long. 55° 15.1′ E.) i.e. 272-1,850 m. from this light thence to the shore line on a Bearing of 180°. This has been declared a prohibited area.

Small craft, dredgers and hooper barges will be operating within this area. The main breakwater will consist initially of an island with the breakwater extending both seawards and shorewards from it.

White flashing beacons will be positioned at 400 m. intervals along the breakwater and in addition various construction lights will be exhibited.

Legal steps will be taken against any negligence whatsoever from Masters.

DOCUMENTS: Following should be airmailed to Agent prior ship's arrival: 6 copies Dangerous Cargo List, Stowage plan in duplicate, Hatch list in duplicate, 7 copies of cargo manifests, 1 copy of each Bill of Lading. On arrival, 3 crew Lists required.
APPROACHES: Open roadstead. Cargo discharged into barges.
ANCHORAGE: Marked by light buoy in position 310°, 1.06 miles from Nayif Tower. Recommended anchor to N.E. of light buoy in approx. position 25° 17′ 4″ N., 55° 16′ 16″ E. Depth 36 to 40 ft., holding ground considered poor, bottom sand and coral. The closer ships are able to anchor to the buoy, the faster turn-around on barges will be attained. *Warning:* Occasional strong N.W. winds, known as "Shamal" will make discharging impossible and *it is very important* that ships have engines on "stand-by" during such times. Ships allowed enter and leave anchorage at any time of day or night. Launch service through Agent's ship to shore from anchorage, and ship's own boats can also be used without Authorities' permission.
PILOTAGE: None.
RESTRICTIONS: All cargo discharged into barges at anchorage. Coasters with drafts of 11 ft. 6 in. or less can enter creek and discharge alongside. Such vessels usually require a tug boat to pilot them into the creek. Tugs available through Agent. Importation of artificial pearls is prohibited. Purchase of liquor forbidden except by permit.
HEALTH: Prior arrival, Masters are required to send a cable to the Port Health Dept. addressed "Quarantine-Municipality-Dubai" on the following lines:

(Vessel's name). . . ETA . . Hour . . Date . . .
Crew all healthy request free pratique
Master

Normally all vessels declared healthy by the Master are automatically allowed to berth immediately on arrival, and Health Dept. personnel will board vessels after berthing.

Arrival: Ships boarded immediately upon arrival weather permitting, and Masters then have to complete a short Arrival Report. No formalities of any kind with Port Authorities and ships allowed to arrive and sail at any time.

Departure: No port clearance is issued in Dubai. A letter will be issued by Agent which may be produced at next port of call instead of usual departure clearance.

RADIO: No port radio station. Cables from vessels outside Gulf may be routed through Muscat Radio, and from inside Gulf through Bahrain Radio. Vessels should advise Agent of ETA 72, 48 and 24 hours prior arrival. Some Agents also equipped with VHF calling Channel 16. Ship's radio station may be operated at anchorage.

Nearing Dubai and approximately 8-10 hours prior to arrival, vessel should switch on VHF Channel 16 and call Agent. On contact, change to one of Channels 14, 13, 12, 9 or 6 for further communication. Regular contact then maintained until departure from Dubai.

DISCHARGE TURN: Priority of discharge given to ships carrying mail and/or passengers for Dubai. Ships carrying less than 100 weight or measurement tons have priority and are supplied with one barge for discharge of cargo immediately on arrival, whether turn is in force or not. Should there be congestion, Agents require Stowage Plan showing clearly that all Dubai cargo is freely available and Master's signature on a request for discharge turn. Based on this, vessels will be registered for turn. Registration can only be performed during office hours.

After confirmed registration, at which will be given a deadline for turn, ships may proceed to other ports for discharge, but must return Dubai prior time and date given, otherwise turn is lost. Particular cargoes for H.H. The Ruler have priority. This should be evidenced by Manifests which will be produced to Customs Authorities in Dubai for approval. The cargoes must be accessible for immediate discharge, which should be verified by stowage plan.

BERTHING:
Khor Dubai: Khor Dubai Corniche Beacon 25° 16′ N., 55° 18′ E.
Approaches: Dredged to 5.5 m. The channel running parallel with Port Rashid lee breakwater.
Restrictions: Breakwaters will be lit shortly.
Draft at Berths: 4.5 m.
Tugs: May be arranged by Agent if required.
Fuel: Caltex supply fuel. Also Shell and BP.
Hamriya Port: Main Breakwater Light 25° 18′ N., 55° 20′ E.
Flag: UAE and Dubai Emirate.
Documents: The following should be airmailed to Agent prior to ship's arrival.

2 Dangerous Cargo Lists.
2 Stowage Plans.
2 Hatch Lists.
2 Freight Manifests.
7 Cargo Manifests.
1 Copy of Bill of Lading.
4 Crew Lists required (on arrival).

Approaches: Dredged to 6 m. between breakwaters. Breakwaters are lit.
Pilotage: Pilots can be obtained from Port Rashid by arrangement.
Restrictions: Vessels will not be allowed to remain alongside the quay when not working cargo if other vessels are waiting.
Draft at Berths: There are no berth numbers. However, there are 3 quays. One measuring 300 m. in length with a draft of 4.5 m., 1–160 m. and 1–900 m., the last 2 with draft of 6 m.
Tugs: May be arranged by Agent if required.
Radio: The Port Signal Station (call sign: "Khor Dubai" equipped with VHF and M/F SSB is situated near the entry to Dubai Creek. Vessels should contact the station by VHF Channel 16 or 12 or on RT 2182 K/cs. Signal station is manned 24 hours.
Pratique: Not applicable.
Berthing: Berthing is reported to Khor Dubai Report Station.
Fresh Water: Presently available at one point only. The supply is made by Port & Customs office and vessels may directly order their requirement or through Agents.
Fuel: Caltex supply fuel. Presently from one point only.
Cargo Handling: Port is not involved in the cargo discharge operation.

There is no equipment available in the port such as cranes, forklifts etc. and if required, to be arranged by Agent.

Neither shed nor yard is available and therefore cargo is accepted on direct delivery basis only.

Stevedores: No stevedoring company in the port, labour is arranged by Agent.
Telephones: No connections at the quays. However, there are telephones in the adjacent Customs office.
Lighterage: Available.
Shore Pass: After berthing, all passports and Seaman's books should be surrendered to the Customs office situated in the port area with 3 copies of crew list against which shore passes issued. Before sailing of the vessel, a clearance should be obtained from the Port & Customs office (Launch Section) and produced to the Customs office for releasing the Seaman's Books/Passports.
Authority: Port and Customs, Dubai.
STEVEDORES: Loading/Discharging Rates: Stevedores, tally clerks, supervisors, etc., will be supplied from shore at the same time as ships are supplied with barges. These people working under vessels' supervision and responsibility.

First Shift: from 0800 hrs. to 1800 hrs. Second shift: from 1800 hrs. to 2400 hrs. Third Shift: from 0000 hrs. to 0800 hrs. Very difficult to get stevedores to work third shift unless ship will complete within a reasonable time into the third shift. First 2 shifts always worked.

Drinking water must be supplied by ship free of charge to all men from shore but food to supervisors, tally clerks, watchmen and foremen.

Expected outturn working three hooks:

Bagged cargo	400–500 tons
Cased cargo	150–200 tons
Timber on deck	300–350 tons
Timber in hatches	200–250 tons

Usually five ships can work at one time.

MEDICAL: Qualified doctors available ashore and also a hospital. Most medicines available at fairly low prices. Dentist also available. Walking cases should be brought ashore *in the morning* for treatment, but in emergency, a doctor will board the ship.
TANKERS: See "Port Rashid".
FRESH WATER: Can be supplied at Dubai anchorage at following rates (approx.): quantities 600 tons, 75 tons, or 25 tons at one time.
FUEL: See "Port Rashid".
FIRE FIGHTING: No facilities available at anchorage.
CUSTOMS ALLOWANCE: *Tobacco:* 1,000 cigarettes or 200 cigars or 1 kilo of tobacco. *Perfumes:* 1 litre of toilet water (Eau de Cologne) and not more than 150 grams of perfume. *Currency:* Unlimited.

CONSULS:

Egypt
India
Iran
Iraq
Italy
Kuwait
Great Britain
Pakistan
Norway
Netherlands
Qatar
Saudi Arabia
Sweden
Switzerland
USA

Additional Embassies/Consulates in Abu Dhabi.

REPAIRS: Fully equipped engineering workshops, radar and radio technicians capable of carrying out extensive repairs available. Underwater cleaning, repairs and other works connected with this also available. See also Dubai Dry Dock under "Port Rashid".

DRY DOCK: Dubai Dry Dock expected to be in operation by Spring of 1979. The dry dock is adjacent to Port Rashid – See "Port Rashid".

REPATRIATION: Visa is required for non UAE citizens visiting Dubai for a period exceeding 7 days. Agent can assist provided complete passport details given well in advance. Excepted are British Subjects with right of abode in the UK who are permitted to remain in UAE without visas for a period of 1 month. For temporary visitors of other nationalities the Agent can arrange under its sponsorship transit visa valid for 7 days provided the person holds a ticket showing a confirmed flight out of UAE. However, person must leave UAE via airport through which he entered.

AIRPORT: Regular international scheduled flights. Also domestic flights within Gulf area.

TIME: GMT plus 4 hours.

HOLIDAYS: *Public Holidays in 1979:* 1st January; 10th February; 23rd June*; 6th August*; 25th August*; End of Ramadan 3–5 days holidays. End August. 1st November*; 21st November*; 2nd December; 25th December.
*Not fixed.

SHORE LEAVE: Officers and crew may come ashore during daylight hours for shopping and recreation. They shall then carry a valid passport, ID-card or Seaman Book, which will be placed at the Immigration Office when landing. The passport, ID-card or Seaman Book will be returned upon returning to ship. No alcoholic beverages allowed to be brought ashore.

GENERAL: Dunnage – not available. Heavy lifts – not available at anchorage. Shore cranes have lifting capacity up to 30 tons.

Weather: Summer months in the 40's and humid. Winter months in the 20's and dry.

Alcoholic Beverages: Allowed to be stored and consumed on board also in port, while sale of this and pornographic materials is strictly forbidden.

Accommodation: In 1978 construction of many hotels was completed and rooms in all price ranges are now readily available in Dubai on both the Deira and Dubai side.

Business Office Hours: Normally 0800 to 1300 hrs. 1600 to 1800 hrs. Government offices: 0800 – 1200 hrs. Banks: 0800 – 1200 hrs.

LAUNDRY: Available but about 2-3 days required.

PROVISIONS: Fresh vegetables, frozen stuff, bonded stores, etc., available. Requirements should be given immediately on arrival. (The liquor and beer prices are high.).

SURVEYORS: Lloyds.

AUTHORITY: Port and Customs Dept. Dubai Port Authority.

AGENT: Gulf Agency Co. (Dubai) Ltd. POB 2404, Dubai, U.A.E. Cables: "Confidence", Dubai. Tel: 431300. (24 hours service). Telex 45448, 45809 ("GACDB EM"). Radio: Marine VHF radio, stand-by on Channel 16 (156.8 mHz) Callsign "Confidence, Dubai".

Operators of ship-servicing and supply organisation: Crew-changes, mail spares and/or delivery of provisions undertaken at sea without deviation to serviced vessel.

FATEH TERMINAL (offshore Dubai). (See Plan Book)

Oil Loading Terminal of the Dubai Petroleum Company.

Note: All tankers loading Fateh Terminal cleared by Dubai Petroleum Company, taking care of all necessary documentation concerning cargo. DPC does not charge owners/operators for this service. However, for all other agency services DPC refers owners/operators to regular shipping agents in Dubai.

According present oil company regulations vessels not allowed receive any deliveries or any launch alongside while loading at Terminal. Deliveries of mail, spare parts and performance of crew changes will, therefore, take place at Terminal anchorage, Dubai anchorage, or at a rendezvous point.

Weather permitting, Fateh Terminal operates 24 hours a day, 7 days a week and provided berth not occupied, tankers will be berthed upon arrival, day or night.

LOCATION: Fateh Terminal consists of the crude oil production and export facilities of the Fateh and S.W. Fateh Fields offshore Dubai, United Arab Emirates. The Terminal Limits are bounded by the following co-ordinates:

(1)	25° 40′ N.	54° 30′ E.
(2)	25° 40′ N.	54° 26′ E.
(3)	25° 33′ N.	54° 15′ E.
(4)	25° 30′ N.	54° 15′ E.
(5)	25° 28′ N.	54° 17′ E.
(6)	25° 28′ N.	54° 30′ E.

Within this area the anchoring of vessels is prohibited and the Terminal Safety Regulations have effect.

NAVIGATIONAL AIDS: Both SPMs are fitted with a white light flashing the Morse letter "U" every 30 seconds visible for a distance of 5 miles.

The three submerged oil storage tanks, platforms, bridges and production units exhibit lights flashing "U" in Morse and are also equipped with foghorns sounding "U" in the Morse Code every 30 seconds. Various working lights are also shown.

The two oil storage vessels Majmaa I and Majmaa II are fitted with a white light flashing the Morse letter "U" every 30 seconds visible for a distance of 5 miles.

Each vessel is also equipped with a continuously operating foghorn sounding the letter "U" in Morse at intervals of 30 seconds.

The Central Production and A Platforms exhibit lights flashing "U" in Morse and a foghorn every 30 seconds sounds the letter "U" in Morse.

Various working lights are also shown from the well platforms within the area. All are fitted with a white light flashing the Morse letter "U" every 30 seconds.

Each well platform is fitted with foghorns sounding "U" in Morse Code every 30 seconds.

Four flares in position:

(1)	25° 35′ 50″ N.	54° 25′ 50″ E.
(2)	25° 35′ 56″ N.	54° 25′ 20″ E.
(3)	25° 35′ 48″ N.	54° 25′ 18″ E.
(4)	25° 29′ 44″ N.	54° 18′ 29″ E.

give an orange light which may be visible at a great distance from the Terminal, depending on atmospheric conditions, in addition the flare structures show a white light flashing "U" in Morse every 30 seconds visible for 5 miles.

Numerous small unlit buoys for the use of working craft may be encountered within the Terminal area.

APPROACHES: On approaching Terminal, Masters of incoming tankers should head for Anchorage Area (see "Anchorage") where, under normal conditions, their vessel will be boarded by a DPC Mooring Master.

ANCHORAGE: An area immediately East of Terminal Limits is designated as the Anchorage Area, centred on position as follows:

25° 36′ N. 54° 31′ E.

This co-ordinate represents the centre of a circle with a radius of approximately 1 mile which must be used by vessels requiring to wait at anchor. Anchoring within the Terminal limits is strictly prohibited. For reference purposes, the anchorage area bearing from Port Rashid (Dubai) Light is 298° true, distance 44.6 miles and from Jazirat Sirri Light 187.5° true, distance 17.5 miles.

If a tanker is not scheduled to berth on arrival (e.g. another vessel is in the berth, or the port is closed on account of adverse weather conditions, etc.) Masters will be advised by radio and requested to anchor.

FACILITIES: For the export of crude oil 2 single point mooring buoys have been installed in positions:

(1) 25° 35′ 12.6″ N. 54° 25′ 46.3″ E.
Bearing 261° true 4.8 miles from anchorage.
(2) 25° 35′ 12.6″ N. 54° 24′ 35.0″ E.
Bearing 262° true, 5.7 miles from anchorage.

READINESS: After arrival at the Anchorage Area and when the tanker is ready in every respect to load, the Master may tender his Notice of Readiness.

Notices of Readiness will be accepted provided one or other of the following events shall have transpired:

(*a*) The Master shall have received the Mooring Master on board or;

(*b*) The Master shall have dropped the anchor in the Anchorage Area.

Port closed: Notices of Readiness will not be accepted during periods when the port is closed. The port is "closed" when the weather is such that it is too rough for incoming tankers to berth. The decision regarding the opening and closing of the port will rest with the Fateh Terminal Superintendent or his Deputy.

Order of Berthing: Vessels will normally berth in order of arrival.

DOCUMENTATION: *Documentation and ship's agency:* In the normal course of events, DPC acts as tanker Agent and prepares all crude oil loading documents. For these services no charge is made.

Early Departure Procedure: At the Master's discretion. In order to expedite turn-round of vessels in this port and avoid undue delays caused by weather or other circumstances, Masters of vessels on arrival are requested to sign blank cargo documents.

Normally, completed cargo documents required by the Master will be placed on board prior to sailing. If this is not possible without incurring undue delays, the relevant documents will be airmailed to the Master to await the vessel's arrival at her discharge port.

The official cargo, i.e. quantity loaded, will be transmitted by radio whilst unmooring. In the event of a dispute, the receipt of a Letter of Protest will be acknowledged by the Mooring Master. Any protests by the Master concerning the quality of cargo should be made before departure and any resulting investigation should be made before the vessel sails.

Outward Clearance: A tanker will be considered clear to depart Fateh Terminal when the crude oil loading documents have been delivered to the Master, or in the case of early departure, clearance will be given through the Mooring Master.

Mail: Official ship's mail and crew's personal mail will be handled and shipowners debited accordingly.

PILOTAGE: Pilotage is compulsory within the Terminal limits. Vessels to be moored at Fateh Terminal will be boarded by a DPC Mooring Master in the Anchorage Area. The Mooring Master will advise the ship's Master on approaches to the SPM, mooring and unmooring, connecting and disconnecting hoses and all other operations within the Terminal area including all manoeuvring of the vessel. The Master or one of his qualified deck officers must be on the bridge at all times while the tanker is being manoeuvred.

The services of a Mooring Master are provided without charge, upon the express understanding and condition that when any Mooring Master furnished by DPC goes aboard a vessel for the purpose of assisting such a vessel, he becomes for such purposes the servant of the owners of the vessel and DPC shall not be liable for any damage or injury resulting from the advice or assistance given or made by such Mooring Master while aboard or in the vicinity of the assisted vessel.

RADIO: *Communications with DPC:* Cable Address: Dupetco, Dubai. Telex: DB 423.

Initial Communication: Initial communication between ships and DPC should be via Bahrain Radio (call sign GOU) which operates on a 24-hour basis.

Communications within 60 miles of Terminal: Once ships are within about 60 miles of Fateh Terminal communication may be established by radio telephone on International Marine VHF Channel 16 (156.8). This frequency is monitored continuously. Once contact has been made on Channel 16, further conversation should be conducted on either Channel 14 (156.7 mc), Channel 13 (156.65 mc), Channel 12 (156.60 mc), or Channel 8 (156.40 mc).

Communications after DPC Mooring Master has Boarded: A DPC Mooring Master will board incoming tankers in the anchorage area and will bring with him portable VHF radio telephone units. From that time onwards all communications between ship and platform will be conducted by the Mooring Master via the portable VHF units, unless owing to failure of portables it is necessary to revert to mains VHF Channels.

Advice of Tanker Arrivals:

Initial Estimated Time of Arrival (ETA): When a tanker bound for Fateh Terminal is within 72 hours of arrival at Fateh Terminal, the Master should notify DPC by cable via Bahrain Radio giving the following information:

(a) Name of tanker.
(b) ETA in GMT (Dubai time is GMT+4 throughout the year).
(c) Quantity of cargo required.
(d) Maximum loading rate.
(e) If the ship's hose connections are different from 16 in. or 12 in. standard ASA 150 lb. type, the size should be stated.

Subsequent ETAs: Sections *(a)* and *(b)* of the above message should be repeated via Bahrain Radio when the tanker is within 24 hours and again when within 12 hours of arrival at the Fateh Terminal.

Unreasonably insufficient or inaccurate ETA messages may alter the order of berthing of ships to the disadvantage of those ships giving sufficient and accurate ETA messages.

Radio Telephone Communication when Approaching Fateh Terminal: When about 60 miles off the Terminal contact may be made by radio telephone on International Marine VHF Channel 16, and communications should continue via this method until a DPC Mooring Master boards.

MOORING: *Preparation for Mooring:* Vessels are requested to have pilot ladder, hoist and/or accommodation ladder safely and securely rigged for immediate use and long enough to meet the Mooring Master's launch. Vessels will provide a lee for the Mooring Master on the port side both when boarding and leaving.

For vessels with a freeboard of 40 ft. or more, the accommodation ladder shall be rigged out, lowered down so the platform is not more than 10 ft. from the water level and a short pilot ladder rigged to cover the access to the platform.

Tankers are requested to have ready on the forecastle head the following:

(a) 2 towing ropes, polypropylene if possible.
(b) 2 messenger ropes, minimum lengths of 300 ft.

Tankers are requested to have ready on the port side amidships the following:

(a) Derrick rigged and ready to pick up from a launch.
(b) Mooring shackles.
(c) Wire strops and hose connection gear.

Securing of the Terminal's Nylon Ropes: On the near approach to the buoy, a launch will attach a ship's line to one of the Terminal's floating nylon ropes. This will be hove aboard and secured to the towing bracket if the ship is so fitted, or otherwise secured by a ship's or Terminal mooring wire previously passed aboard. The same operation will be repeated with the second nylon rope.

LOADING: *Lifting Hoses:*

SPM I: Two 16 in. diameter hoses will be lifted by ship's gear on the port side. Each lift is 5 tons.

SPM II: Two 16 in. diameter hoses will be lifted by ship's gear on the port side. Each lift will be 7 tons.

The hoses shall be hoisted and connected by ship's crew. The Mooring Master will advise the ship's officer in charge concerning lifting techniques.

Sundry Hose Connecting Equipment: Tankers shall be equipped with the necessary blocks, tackle, wrenches, gaskets, bolts, nuts, etc., to efficiently effect the hose connection.

Flange sizes: 16 in. – 12 in. reducers will come on board the tankers with the mooring gear thus enabling tankers with either 16 in. or 12 in. ASA 150 lb. flanges to connect directly to the Terminal hoses. Flange size 16 in. – 12 in., 16 in. – 10 in. reducers with ASA 150 lb. flanges are available if required to enable tankers with 12 in. – 10 in. manifold connections to connect to the Terminal hoses.

Communications During Loading: (See "Radio"). All communications relative to the loading of the vessel shall be routed through the Mooring Master who will remain in contact with the Production Platform constantly via portable VHF units. In case of temporary breakdown of the portable VHF circuit, contact may be continued on International Marine Channels 16, 14 or 8 if the vessel is so fitted.

Failure of Communications: Should communication with the Production Platform fail, loading will cease.

Emergency Shut down: An emergency cessation of loading may be effected by the ship's VHF Channel 16.

Loading rate: At SPM No. 1 the maximum loading rate will be 40,000 barrels per hour. At SPM No. 2 the maximum loading rate will be 100,000 barrels per hour.

BALLAST: *Precautions Regarding Pollution:* It is the responsibility of the ship's Master to see that no crude oil (or bunkers', diesel or bilge) or dirty ballast is pumped or spilled overboard from his ship whilst in the area. Drip pans should be used, especially when disconnecting hoses in order to prevent spillage overboard.

Scuppers to be Plugged: Before loading commences, all overside scuppers shall be made oil-tight.

No facilities for Receiving Dirty Ballast: At Fateh Terminal there are no slop tanks or facilities for receiving dirty ballast. Tankers must arrive with clean ballast. In the event a tanker does have dirty ballast it will not be allowed to be pumped overboard. The dirty ballast will be collected into one tank, measured and left aboard.

Discharging Ballast at Night: During the discharge of ballast in darkness, the sea shall be adequately lighted in the area of discharge.

MEDICAL: At Fateh Terminal medical and dental services are not available. In emergencies requiring hospitalisation, the patient will be taken by boat from the tanker to the production platform, hoisted to the upper deck of the platform and flown by helicopter to Dubai. The shipowner will be charged for all expenses incurred.

FUEL: Bunker "C" is available at the Fateh Terminal Anchorage from an awaiting bunkering tanker, providing sufficient notice has been given. Arrangements should be made through local shipping agents in Dubai.

GENERAL: The following are not available at Fateh Terminal: fresh water, stores, boats for hire; repair facilities; facilities for changing ship's crew.

There is no shore leave.

AGENT: Gulf Agency Co. (Dubai) Ltd., POB 2404, Dubai, U.A.E. Cables: "Confidence", Dubai. Tel. 431300, (24 hours service). Telex 45448, 45809 ("GACDB EM").

VHF Radio: standing by on Channel 16 (156.8 mHz) communicating on Channels 14, 12 or 6, call sign "Confidence Dubai".

SSB Radio: standing by on 6910 mHz lower side band, communicating on frequencies 3539, 6910 and 7010 mHz. Call sign "Confidence Dubai".

FUJAIRAH: 25.07 N., 56.18 E.

Port under construction.

LOCATION: 3 km. North of Fujairah town and 20 km. South of Khor Fakkan.

DEVELOPMENTS: Facilities will include 10 berths for containers. Roll-on/Roll-off and general cargo. Depth alongside 10 m. No length restrictions. Also 4 berths for coasters with depth alongside of 7 m.

The first temporary berth will be available in 1978 and completion expected in 1981.

JEBEL DHANNA, Abu Dhabi: 24.11 N. 52.38 E.

(See Plan Book)

COURTESY FLAG: Vessels calling at ports in the State of Abu Dhabi should fly the flag of the United Arab Emirates, and the flag of the State of Abu Dhabi.

APPROACHES: *(Inward Passage).*

Outer Route between Jazirat az Zarqa and Ghasha Tower Beacon marked by 2 light floats and 4 buoys. The 2 light floats are both port hand marks, and the buoys starboard hand, as indicated by shape, colour and light characteristics.

Inner Channel, from Ghasha Tower to berths at Jebel Dhanna marked by 21 light buoys. Least depth in this channel is 46 ft. and min. width of 800 ft. between Nos. 7 and 10 buoys.

(Outward Passage)

After clearing berth an outward bound vessel should steer to pass midway between Nos. 13 and 20 buoys, leaving Alaq Island to starboard. From Nos. 13 and 20 buoys the same track is followed as for inward passage.

Navigation in shallow waters: The navigation of deep drafted vessels at high speeds in shallow waters introduces certain hazards. Masters of ships should be guided by the following:

Due consideration should be given to the effect of draw down at speed on vessel's draft in shallow water, bearing in mind vessel's trim

If possible, confirm actual height of tide against predictions and if not, bear in mind that after strong winds the actual height of tide may be reduced and extra caution must be exercised for a few days during and after bad weather.

Ensure accuracy of vessel's draft reading, including the midship draft, having in mind the tendency of vessels to sag and the adverse effect of a small list.

Reduce to minimum safe speed to pass over and near shoal areas.

Reduce to a minimum safe speed when negotiating turns in order to reduce heel under helm.

Note that list can mean an appreciable increase in draft.

When strong tidal streams are running across a channel, extra vigilance is required, and allowance made for set, particularly at reduced speed, to ensure vessel proceeds along mid channel.

DOCUMENTS:

2 Crew Lists.
2 Passenger Lists.
2 Manifests.
1 International Maritime Declaration of Health.

READINESS TO LOAD: Notice of Readiness will be received by the Company Representative provided the vessel is ready to load. Lay time will commence 6 hours after receipt of Notice of Readiness, berth or no berth.

The Company will make every effort to load the tanker on arrival provided a berth is available and weather permitting.

EARLY DEPARTURE PROCEDURE:

A. Early Departure Procedure is presently in effect at Jebel Dhanna.

B. This procedure will be offered to Masters on a voluntary basis but will exclude voyages of less than 10 days' duration.

C. Official declaration indicating acceptance/non acceptance will be signed by the Master on arrival.

D. If EDP is requested, Bill of Lading and Manifest will be prepared in advance except for cargo figures and be presented to Master for signature. Master may authorise Agent to sign all other documents on his behalf.

E. Bills of Lading and Manifest will be retained on board as indicated by documentation.

F. On completion of loading, the Terminal will endeavour to present completed cargo documents on board prior to sailing. In the event that the vessel sails before documents are completed vessel to maintain continuous radio watch after sailing, until cargo loaded quantities have been passed to the vessel by the Agent via Bahrain Radio. Advice of cargo loaded quantities should be transmitted to the vessel within 2 hours of sailing, and the quantities so advised should be inserted on Bills of Lading and Manifests.

G. In case of disagreement on Cargo figures, Master may authorise Agent to serve an official Letter of Protest.

H. All ship's documents, sent to London office under this procedure must be endorsed "EDP applied".

This procedure is used by all vessels loading at Jebel Dhanna terminal, but the oil company pointed out that a very limited use of this procedure is actually made inasmuch as all ship's documentation is generally put on board by the time a vessel has disconnected hoses, unmoored and is ready to sail.

PILOTAGE: Pilotage from Ghasha Tower inward and outward compulsory for all sea-going vessels. Give 48 hours notice of ETA, etc., to Agent via Cable and Wireless, Bahrain. On confirmation of ETA on VHF Channel 16 either to "Jebel Dhanna Radio" or "Jebel Dhanna Pilots", Pilot will board inward bound ship to West of Ghasha Tower Beacon and will conduct through Inner channel to berth. Pilots act as Mooring Masters and direct loading operations. Pilots disembark off Ghasha Tower outwards.

TIDES: In outer approaches, i.e. from Zarqa to Ghasha Tower, tides almost purely diurnal, but semi-diurnal effect becomes more evident as Dalma is approached and is (comparatively) most marked at Jebel Dhanna. However, this semi-diurnal effect not of great significance and for all practical purposes it can be taken that there is only one high water and one low water per day throughout length of approach and at Jebel Dhanna, but times of high and low water at various control points are not coincident.

High water at 01 buoy occurs on average about 1.5 hours before high water at Jebel Dhanna, but differences may be from about half-an-hour up to 2.5 hours.

Tidal Streams. In berth area, streams generally do not exceed 0.25 knot and are predominantly confined to S.E. and S.W. quadrants. In outer approaches, streams appear to attain a maximum of 1 knot approximately along line of route, but this information should be regarded with caution as it depends on limited observation.

ANCHORAGES: If berth not available, or if ships cannot sail immediately after loading, they can anchor in an area South of Buoys Nos. 13 and 20 and North of Berths. This area marked by No. 15 buoy to West, No. 22 buoy to East and by berths to South. Alaq Island lies in the middle of this area and is marked by 2 buoys No. 17 and N. Alaq and by S. Alaq Beacon.

RESTRICTIONS: Vessels must receive clearance from Jebel Dhanna Terminal to enter channel. This is to ensure that all outward-bound vessels are aware of traffic movements in channel. Mooring, loading and unmooring carried out by day and night.

MAX. SIZE: (Also see "Berthing"). Vessels up to 350,000 d.w.t. can berth at Jebel Dhanna.

Note: Draft of laden tankers leaving Jebel Dhanna controlled by depth in Inner Channel between Nos. 7 and 10 Buoys. This is 46 ft. below Chart Datum and Zero of predictions. An allowance of 3 ft. under keel is considered sufficient for vessels up to about 100,000 tons. 4 ft. for vessels between 100,000 d.w.t. and 225,000 d.w.t., and 5 ft. for vessels greater than 225,000 d.w.t.

With 3 ft. under keel general limitations as follows:

(*a*) Ships drawing 44 ft. may sail at any time on any day.
(*b*) Ships drawing 45 ft. will rarely have to use tides.
(*c*) Ships drawing 46 ft. will usually have to use tides.
(*d*) Ships drawing 47 ft. will *always* have to use tides.
(*e*) Ships drawing 48 ft. will *occasionally be neaped.*
(*f*) Ships drawing 49 ft. will be neaped 294 days ± per year. The best months are June, July and August. Meteorological conditions may reduce the tides by up to 1 ft.

EQUIPMENT: Port and Starboard anchors to be fitted with anchor buoys and sufficient line to facilitate recovery of anchor in the event of loss.

4 good mooring lines of not less that 120 fathoms each and of a suitable size for the vessel. 2 additional 120 fathoms lines securely tailed to the first lines for occasions where 120 fathoms may not reach the stern buoys initially.

For vessels of 50,000 d.w.t. and larger, power mooring winches with 200 fathoms wire mooring rope are recommended.

Suitable new rope stoppers to be available forward and aft.

2 good stoppers for use on 5.5 in. circumference wires. Preferably patent carpenter's stoppers.

2 good boat ropes 4.5 in. circumference of at least 200 ft. long.

A clean, safe pilot ladder of adequate length battened so as to prevent turning. A suitable line to be ready for hauling gear on board, such as hose clamps, reducers and elbows. A lifebuoy should be placed handy to this ladder.' Tankers of 40,000 d.w.t. and over should have rigged, when in ballast, an accommodation ladder lowered to about 12 ft. above water. This can be adjusted to suit the conditions. A pilot ladder should be rigged immediately abaft the accommodation ladder, to within 2 ft. of the water. This will enable the Pilot and others when the vessel is moored to ascend the pilot ladder clear of the launch and then step on to the lower platform of the accommodation ladder.

Deck machinery must be available at all times.

Whistle or siren must be available at all times.

Adequate deck lighting should be provided for night-time operations, with special emphasis on the following areas:

1. Overside at boarding position for Pilot.
2. Overside abreast of manifold, for hose lifting.
3. Working area around manifold.
4. Poop working area, for handling mooring ropes and wires.

Note: "Aldis" type signalling lamp to be available when mooring.

HEALTH: International Maritime Declaration of Health. In case of suspected disease Agent to be informed on VHF Channel 16. Smallpox and cholera inoculation required.

RADIO: Vessels bound for Jebel Dhanna should give 48 hours notice of their ETA Ghasha Tower Beacon to their Agents via Cable & Wireless Bahrain, also advise the quantity of cargo required, SWL of derricks, number of hours ballast and maximum loading rate.

A continuous listening watch is maintained on Channel 16 – 156.80 Mc/s. by the Terminal at Jebel Dhanna, call sign "Jebel Dhanna". Vessel's ETAs should be confirmed using Channel 16.

The ship's Agents and "Jebel Dhanna Pilots" also maintain a listening watch on Channel 16. By calling "Jebel Dhanna Pilots" before arrival, arrangements can be made by radio regarding mooring, loading hose connections, etc., so that unnecessary delays to the vessel may be avoided.

TUGS: No tugs available.

BERTHING: Berthing is by mooring to 2 anchors and stern buoys. Arrangements in advance by contacting Jebel Dhanna Pilots on Channel 16.

Berths are approached on W.S.W. course passing S.E. of Alaq Island. Leading lights have been established which will lead ships on the line of the 2 anchors when in berth. A small marker buoy has been established to assist the Mooring Master in placing starboard anchor in correct position. Vessels berth heading N.W. Holding ground good. Bottom consists of clayey silt.

Sea Line Loading Berths. 4 sea-line berths Nos. 1, 2, 3 and 4. Nos. 1 and 2 supplied by single 36-in. lines, and Nos. 3 and 4 supplied by 42-in. lines, each terminating in a header which passes under vessel in berth.

Berth	*Draft Accept-able* (ft.)	*Approx. d.w.t.* accept-able*	*Max. loading rate* (t.p.h.)	*Strings of flexible hoses*	*Length of sea line* (ft.)
No. 1	45	83,000	6,000	2×12 in., 2×16 in.	16,269
No. 2	46	85,000	6,000	2×12 in., 2×16 in.	16,427
No. 3	49	90,000	8,500	4×16 in.	19,000
No. 4	49	90,000	9,500	2×16 in.	17,200

*Deadweights shown for vessels loading full cargoes. Part Cargoes may be greater. Nos. 2, 3 and 4 Berths can accommodate VLCC's but No. 2 berth is restricted to vessels having a max. LOA of 1,100 ft.

Least depth of water available in berth, and swinging circle, after deducting 6 ft. for height above sea bed of sea line cradle is as follows:

No. 1 Berth, 51 ft.; No. 2 Berth, 52 ft.; Nos. 3 & 4 Berths, 55 ft.

Swinging circle defined as 1.5 ship's lengths from dropping position of ship's inshore anchor.

The approximate draft limits quoted above are based on an underkeel clearance in the berths of 6 ft. Rising tides permit deeper loading in berths.

Seawards ends of pipe-lines, terminate in 12 in. or 16 in. flexible hoses, there being 4 such strings of hoses at each berth. 2 taken up on each side of vessel.

Additional information obtainable from Jebel Dhanna Pilots on Channel 16 prior to vessel's arrival.

HOSES: Derricks or cranes must be capable of lifting a string of hoses from the sea-bed to a height of 30 ft. above the deck. For lifting 16 in. diameter hoses, the lifting gear should have a SWL of not less than 10 tons and for 12 in. diameter hoses a SWL of not less than 5 tons.

Gear should be rigged on both sides of the vessel in order to lift hoses on either side or both sides simultaneously as required.

It may be convenient to handle blank flanges, reducers, etc., with the derrick or crane. Reducers or adaptors should be bolted to the ship's flanges, so as to take 12 in. or 16 in. hose as may be necessary.

Note: Where a vessel has 2 or more loading connections, those used should not be less than 7 ft. apart.

Hose Hang off bitts are required at about 10 ft. from the ship's rail at the loading manifold to secure the submarine hoses on both sides.

LOADING: *Flash Point:* The flash point of Murban Crude is below 32° F.

Crude Oil Temperatures: While every effort will be made to keep the loading temperatures of export crude below 150° F., there may be times when this temperature is exceeded.

Whenever possible Masters will be advised when this temperature increase is likely to occur, but in Jebel Dhanna the temperature ashore varies according to loading rate, production rate, changes in production pattern from the field, tank levels, etc., and the temperature difference between shore and ship varies according to loading rate, quantity of cargo taken, berth occupied and when last used, etc., thus the ship's temperature obtained on a previous voyage may be substantially different to that obtained on the current voyage and the previous vessel's temperature can be taken as an approximate guide only.

ADCO will not accept any responsibility for the failure by the Master of any tanker loading at Jebel Dhanna to take appropriate action to receive hot oil, prevent any damage to his vessel and/or injury to his crew.

H_2S Content: Murban crude contains concentrations of H_2S (Sulphuretted Hydrogen). Hydrogen sulphide has a disagreeable odour characteristic of rotten eggs which quickly deadens the sense of smell so that a dangerous concentration may be present which cannot be detected by odour. It is, therefore, important that when the presence of the gas is detected the area or compartment concerned should be left with all possible despatch until adequate ventilation can be carried out. The combustible gas indicator may not detect this type of gas. The foregoing must be dealt with in the light of experience where large quantities of crudes of this type have been carried without accident and we do not wish to exaggerate the dangers. However, the under-noted precautions have been evolved as necessary to provide against a possible accident and should be strictly observed.

During loading gas should only be allowed to escape via the agreed venting arrangements.

When ullaging or sampling, personnel should stand facing at right angles to the wind direction and so avoid inhaling gas. If H_2S is inadvertently inhaled the man should leave the area and not return until his sense of smell has been restored which means that at least two people should attend the operation.

No one should enter any pump room or any compartment where gas could collect unless another person is standing by.

Life lines, breathing apparatus and resuscitator should be readily available.

As a precautionary measure, the gas ejector for pump room should be put into operation at any time entry is made into this space whilst the possibility of H_2S gas entering pump room from cargo or empty tanks exist.

Loading Operations: The advice from the vessel which states she is ready to receive cargo is considered as final, and as indicating that every operation necessary aboard the vessel has been completed. As soon as possible after such a signal has been received, and without further advice, loading will commence. Damage to hoses can occur if ship's valves are not open at the start of loading. The Mooring Master will not transmit any loading instructions to the shore until the officer-in-charge of the deck has satisfied him that the hoses are connected correctly and that all valves have been set for receiving cargo.

While in berth, ships should be ready to move under their own power in the event of their breaking adrift, catching fire, fire in adjacent berths or other emergency. No repairs are to be carried out while in berth which would immobilise the ship or impair her fire-fighting efficiency.

The Mooring Master will instruct the Master of the Ship as to any signals needed for local requirements.

The Mooring Master will bring a portable radio to the ship.

The radio may not be used for private conversation. Use of the ship's radio while at the loading berth is strictly prohibited.

When loading, the cargo being received shall be frequently measured, thereby preventing loss of oil through a leaking hose. This particularly applies at night, as seepage of oil is practically invisible on the water during darkness.

Caution: The oil loading rates to ships are controlled on shore and an extremely dangerous situation can arise if a ship's valves are closed against the flow of oil.

Particular care must be exercised by ship's personnel to ensure that the Terminal is given timely advice should any reduction be required in the loading rate and adequate "Stand-by" notice must be given before the Final "Stop". At all times the Terminal must be advised when an increase in the loading pressure can be expected due to switching tanks, topping up, etc. To prevent excessive pressure from surge on ship/shore connections, ship's valves should be closed slowly.

The Terminal facilities at Jebel Dhanna have been designed so that tankers can be loaded by turbine driven loading pumps at max. rates up to 6,000 t.p.h. in berths 1 and 2, 8,500 t.p.h. in berth 3, and 9,500 t.p.h. in berth 4. Availability of max. loading rates is dependent on the number of berths occupied.

If vessel is unable to accept the max. loading rate available, then ADPC will be grateful if you will give a brief explanation of the reason for the limitation and we suggest some of the reasons which may govern your restrictions:

(a) Inadequate venting system.
(b) Condition of ship's lines and valves.
(c) Inexperience of crew.

and there may be other reasons.

We are anxious to obtain this information in order to assist in formulating plans for future development.

The quantity of cargo received on board is the responsibility of the ship and no overage may be sent back ashore.

When loading is completed, hoses will be disconnected and lowered to the sea bed, under the supervision of the Mooring Master.

Ships will then proceed to an anchorage allocated by the Mooring Master or direct to sea.

BALLAST: No facilities for disposal of slops or dirty ballast.

When a vessel enters port waters in ballast, the ballast water for overside discharge must be clean and a declaration signed by the Master and delivered to the representative of the Terminal to this effect. Ashes, oil, oily water or other refuse must not be discharged overboard in port waters. Vessel's scuppers must be effectively plugged and leakage or spillage of oil aboard ship must not be swept or washed overboard whilst in port waters.

It is essential that vessel is adequately ballasted to ensure safe handling and manoeuvring. Please comply with the Mooring Master's requests as to ballast quantity and disposition.

Jebel Dhanna is an open roadstead and subject to sudden changes in weather. On occasions it is of great advantage to commence loading whilst discharging ballast or prior to completely deballasting to avoid having the vessel in a flying light condition.

There must be no cleaning of boiler tubes whilst ship is in port. All pumproom sea valves must be closed before commencement of loading.

DENSITY: 1.031.

FRESH WATER: Not available.

FUEL: Bunkers are not available at Jebel Dhanna. A vessel proceeding to a nearby bunkering port should repeat her ETA to Jebel Dhanna Terminal for information.

If ADCO have sufficient information concerning expected arrivals, taking into consideration time taken to bunker, they will advise Masters when they consider that probable delay at Jebel Dhanna can be avoided by the vessel loading cargo before proceeding to the bunkering port.

Similar advice may be given in exceptional circumstances when there is a possibility that unduly large stocks of oil may necessitate shutting down the field.

FIRE PRECAUTIONS: As laid down in the Abu Dhabi (Petroleum Ports) Law No. 12 for 1973 and IOTTSG Safety Guide.

GANGWAY/DECK WATCHMEN: Not necessary.

CUSTOMS ALLOWANCES: Tobacco: No restrictions in quantity on board but must not be conveyed ashore or from one vessel to another without appropriate written permit from Customs Authorities and Port Officer. Wine and/or Spirit: Conveyance of alcoholic liquor from any vessel to the shore or from the shore to any vessel, or from one vessel to another, prohibited without appropriate written permits from Port Officer.

Shipmaster's Report: 1978

All alcoholic liquor must be under bond and sealed.

IDENTIFICATION CARDS: Not required.

CONSULS: None.

REPAIRS/DRY DOCKS: No facilities.

REPATRIATION: With sufficient notice Agents will assist in any repatriation. Landing permit is required for all sign on/sign off personnel for which Agent requires full name/nationality/seaman book/passport number and also 4 to 5 working days to process same. However, facilities are limited and if possible crew changes should be made at other ports.

Shipmaster's Report: 1978

Immigration Authorities require at least 4 days notice and preferably 7 days notice via Agent.

AIRPORT: One mile distant, small air strip owned by ADCO for private use. Nearest International Airport is Abu Dhabi the capital of the State.

TIME: Local time GMT plus 4 hours. No alterations made to clocks during year.

MEDICAL: A male nurse can occasionally be obtained from LAMNALCO, the piloting company, upon request of ship's Agent, but in case of extreme emergency an aeroplane can be chartered from Bahrain or Abu Dhabi to pick up the patient at Jebel Dhanna for transfer and treatment in Abu Dhabi, Bahrain or Dubai.

POLICE/AMBULANCE/FIRE: No Fire or Ambulance facilities available.

The Abu Dhabi Defence Force, Oilfield Security Section maintains a police post at Jebel Dhanna and is responsible to act in case of accident or other emergency, whether ashore or in territorial waters.

TELEPHONES: None.

SERVICES: None.

SHORE LEAVE: Crews not allowed ashore.

REGULATIONS: The Abu Dhabi (Port of Jebel Dhanna) Regulation 1967.

AUTHORITY: Abu Dhabi Company for Onshore Oil Operations (ADCO).

AGENT: National Shipping, Gulf Agency Co. (Abu Dhabi) Ltd., Jebel Dhanna, U.A.E. Cables: "Confidence Abu Dhabi". Telex: Abu Dhabi 2248. Tel: Jebel Dhanna 05–710–26. Radio: Marine VHF radio, stand-by Channel 16 (156.8 mHz) call sign "Confidence Jebel Dhanna".

KHOR FAKKAN: 25.22 N. 56.22 E. (See Plan Book)

DOCUMENTS: The following documents must be in the possession of the ship's Master on arrival, or must be forwarded to ship's Agent prior to arrival:

Immigration:

Crew Lists (2 copies)
Passenger Lists (2 copies)

Customs:

Crew Lists (2 copies)
Passenger Lists (2 copies)
Cargo Manifests (2 copies)
List of Alcoholic Beverages (2 copies)

Port Operator:

Certificate of Registry (1 copy) on request
Classification Certificates (1 copy) on request

The following documents should be handed to the Port Operator by the ship's Agent at least 6 working hours prior to the vessel's arrival.

Cargo Plan (1 copy)
Discharge List (1 copy)
Transhipment List (1 copy)
Dangerous Cargo Manifest (1 copy)
Refrigerated Container Manifest (1copy)

PILOTAGE: Pilotage is compulsory for all ships proceeding beyond the fairway buoy. Port Khor Fakkan will operate a 24 hour, 7 day a week pilotage service. Vessels approaching the Port should await Pilot to seaward of the fairway buoy. The extremity of the breakwater 25° 21′ 28″ N. 56° 22′ 43″ E.) is marked by a white occulting light visible 10 miles.

ANCHORAGE: A limited number of vessels may anchor in Khor Fakkan Bay to the North of the fairway with the prior approval of the Port Operator.

MAX. SIZE: Max. draft entering and leaving is 12.6 m. (40 ft.) range max. 2.5 m. – height of wharf at HW 1.8 m.

No restrictions on LOA.

HEALTH: Normal quarantine regulations apply. Radio pratique will be granted on receipt of radio message from Master via his Agent, stating that no serious illness has occurred during the preceding 30 days.

All crew members must be in possession of valid smallpox and cholera certificates. The Health Officer will board when the vessel is alongside.

RADIO: *Notice of Arrival:* Vessels should advise their Agent ETA Port Khor Fakkan, giving draft, LOA and intended cargo operations to be performed at least 72 hours prior to arrival.

Agents should arrange berthing and labour with the Port Operator. Vessel should contact Port Khor Fakkan signal station on VHF Channel 16 when within range.

VHF: Khor Fakkan Harbour Office can be contacted on Channels 16 and 74. All movement in and out of the harbour shall be notified to the control and permission to proceed obtained for each movement.

TUGS: 2×2400 h.p. (plus standby). Tug services are available for all ships entering the deep water harbour. At the discretion of the Port Operator, ships may be obliged to use the services of a tug or tugs. Tugs are fitted with VHF, fire fighting hoses, monitors and foam tanks.

BERTHING: Length of berth 430 m. Depth alongside 12.0 m. at LW Mooring gangs and berthing launches are provided.

Port Equipment: 2×40 ton Mitsubishi gantry cranes; 4×40 ton electric transtainers; 6 straddle carriers; yard tractors and trailers. Additional equipment such as forklifts, mobile cranes, pallets and barges available on request from the Port Authority.

Storage Facilities: The terminal comprises an area of 100,000 sq. m. and is capable of handling 150,000 t.e.u.'s per year.

Container Freight Station: A container freight station is available at Port Khalid, Sharjah close to the main highway linking Sharjah with its West coast neighbours.

STEVEDORES: *Working Hours:* The port will work on a 24 hour, 7 day a week basis ashore and afloat. Additional charges will apply outside normal working hours which are defined as follows:

Saturday to Thursday except Public Holidays.
First shift 0600 to 1500 hrs. (1 hour meal break)
Second shift 1500 to 2400 hrs. (1 hour meal break)

Normal working hours are subject to change during Ramadan when working hours will be at the discretion of the Port Operator. Requirements for port labour must be submitted by ship's Agent to the Port Operator by 1200 hrs., for work during the first shift on the following day and by 0900 hrs., for work during the second shift.

MEDICAL: Upon application to ship's Agent, medical examination of crew members can be arranged. Personnel will either be sent to private doctor or to Public Health Department as circumstances dictate. Serious cases will be referred to Government Hospital Doctor.

FRESH WATER: Fresh water is obtainable. Agents must notify the tonnage required 48 hours prior to ship's arrival.

FUEL: No facilities at present.

REPAIRS: Marine engineering workshops capable of handling most repairs are available.

SURVEYORS: Services are available upon request.

REPATRIATION: Proximity of the new Sharjah International Airport will permit efficient crew changes and repatriation. Offshore crew changes facilities can be arranged.

Transit visas are not required for crew changes. Ships passengers require a valid visa for transit or temporary stay.

AIRPORT: Sharjah and Dubai.

TIME: GMT plus 4 hours. Permanent.

SHORE LEAVE: Shore leave is permitted to crew members provided identification card or seamen's papers are deposited with Immigration Office situated in the port and collected upon return.

GENERAL: *Pollution:* The provisions of the Khor Fakkan Maritime Law shall apply with respect to the operation of vessels in Khor Fakkan coastal waters.

Garbage disposal services are provided by the Port Operator and are compulsory.

Ships' Chandlers: Complete chandlering facilities are available, handling provisions, laundry and bonded stores.

Water for Labour: A supply of potable water is to be made available to port labour working on board a vessel.

AUTHORITY: Khor Fakkan Port Authority.

AGENT: Gulf Agency Co. (Sharjah) Ltd., POB 435, Sharjah U.A.E. Cables: "Confidence", Sharjah. Telex: 68019 ("Confid SH"). Phone: 22163, 23503.

MINA JEBEL ALI, Dubai: 25.08 N., 54.55 E. (See Plan Book)

FLAG: U.A.E. and Dubai Emirate.

DOCUMENTS: The following should be airmailed to Agent before ship's arrival.

2 Dangerous Cargo Lists.
2 Stowage Plans.
2 Hatch Lists.
7 Cargo Manifests.
2 Freighted Manifests.
1 Copy Bill of Lading.
3 Crew Lists required (on arrival).

APPROACHES: "Mina Jebel Ali" light float on centre line of final channel in 25° 15′ N. and 54° 47′ E. (Gp. Fl. 3 ev. 12 secs. 15 miles) with channel entrance bearing approximately 135° and approximately 12 miles from light float. Proceed with caution as dredging operations are under way.

PILOTAGE: Compulsory. Pilots will board in the area between "Mina Jebel Ali" light float and seaward end of buoyed channel.

RESTRICTIONS: Channel width to mid-1979: 125 m.×13 m. deep.
Channel width at end-1979: 175 m.×13 m. deep.

MAX. SIZE: LOA 225 m. with draft not exceeding 11 m.

Max. draft: In channels 11.5 m.
On quays Nos. 4a and 10: 10.5 m.

TUGS: 2×2,500 h.p. may be available.

RADIO: From 1st May, 1979 vessels should call "Jebel Ali Port Control" on Channel 16 VHF and then switch to working frequency agreed upon with Port Control.

HEALTH: Not applicable at present but expected to be the same procedure as at Port Rashid.

BERTHING: *Berths available:*

Mid 1979	*End 1979*
Quay No. 1 Berth 1-1a 320 m. each	3 Additional Berths
Quay No. 3 Berth 3	4 Additional Berths
Quay No. 4a Berth 2	2 Additional Berths
Quay No. 10 Berth 4	1 Additional Berth
	Quay No. 7 – 6 Berths
	Quay No. 8 – 2 Berths
	Quay No. 9 – 4 Berths

FRESH WATER: Not on quays in 1979.

FUEL: May not be available till mid or late 1979.

CARGO HANDLING: 2×40 ton container cranes operational by May 1979. Only Quay No. 10 will have covered shed in 1979.

STEVEDORES: By Port Authority of Jebel Ali.

LIGHTERAGE: Not available.

MEDICAL: As available in Dubai.

TELEPHONE: Not available.

GENERAL: Mina Jebel Ali is in the construction stage. Channel and basin dredging will continue throughout 1979.

Warning: Gas pipe-line installed 2 – 6 miles East of channel from shoreline to "Fateh" field. Vessels not to anchor East of centre line of channel.

REPORT: The following was received from Sir William Halcrow and Partners in February 1979.

Pilotage: Obligatory and provided by Port Authority.

Anchorage: To be defined by Port Authority. Poor holding ground qualities.

Navigation Aids: Harbour and approaches will be under radar surveillance from the end of 1979.

Entrance Channel: Channel will be opened in phases as follows:
End '78 – 125 m. wide×13 m. deep (below lowest water)
End '79 – 175 m. wide×13 m. deep
End '80 – 235 m. wide×16 m. deep.

Entry Restrictions: To be defined by Port Authority. Channel to be 20 km. long×235 m. wide×16 m. deep and incorporates 25° bend; bottom is rock; outer 17.5 km. of channel is unprotected but buoyed. Tidal range is 2 m. max.; cross current is tidal and parallel to coast and 1.5 knots max.; prevailing wind/waves on same bearing as channel (315°).

Radio: To be arranged by Port Authority. UHF and VHF will be available.

Berth Availability:

Quay	*Min. Depth of Water (m.)*	*Berth Length (m.)*	*No. of Berths Available*			
			Mid '79	*End '79*	*Mid '80*	*End '80*
1	14.0	300	1	3	5	7
2	14.0	300	—	—	—	2
3	14.0	300	2	3	6	8
4	11.5	180	2	2	2	4
5	11.5	180	—	—	—	12
6	11.5	180	—	—	—	1
7	11.5	180	—	6	6	20
8	11.5	180	—	2	2	2
9	11.5	180	—	4	4	4
10	11.5	180	5	6	6	6
		Total:	10	26	31	66

"Availability" defined as quay constructed with reclamation behind and full water depth in front. Roads, services and buildings may not be completed till later. Some berths will be allocated to specific users i.e. Ore and Container Berths.

Tankers: Tanker Berth operational by mid 1979, designed for 75,000 d.w.t. tankers, but approach channel restriction will limit size until end 1980.

Fresh Water: Limited quantities available at present; full water bunkering facilities will be available in due course.

Fuel: To be determined by Port Authority, probably barge bunkering.

Port Authority: Port Authority Jebel Ali, operational by mid 1979.

AUTHORITY: Port Authority of Jebel Ali.

AGENT: Gulf Agency Co. (Dubai) Ltd., POB 2404, Dubai, U.A.E. Cables: "Confidence Dubai" tel 431300 (24 hour service). Telex: 45541 and 45448 (AB GAC DB EM). Radio: Marine VHF, stand-by Channel 16. Call sign: "Confidence Dubai". RT: 2182 kc frequency.

MINA SAQR: 25.59 N. 56.03 E. (See Plan Book)

PORT LIMITS: 'Mina Saqr' and its limits include all waters, installations and the creek of Hanna bounded within 3 mile radius to seaward from the main breakwater light in position Lat. 25° 58′ 48.35″ N., Long. 56° 02′ 43.7″ E.

POSITION: Port Saqr is situated 15 miles by sea and 22 km. by road North of Ras Al Khaimah. On chart BA.2888 it is 1 km. North of Hanna Creek in Lat. 25° 58′ N., Long. 56° 03.5′ E. Jubail Al Harim (6,843 ft.) overlooks the port, and is 10 miles East. The port is bounded by main and lee breakwater.

DOCUMENTS: Following documents to be forwarded to the Agents at least 7 days prior to the vessels arrival:–
3 copies Dangerous Cargo List.
2 copies Stowage Plans.
2 copies Hatch List.
6 copies Cargo Manifests.
1 copy each of Bills of Lading.

On vessels arrival, 4 copies of Crew Lists, 4 copies of Vaccination Lists, Crew Health Certificates, Ships Certificates, etc. to be kept ready for inspection by the officers.

PILOTAGE: Pilotage is compulsory. Pilot may board from launch or by tug at approach buoy and in all cases a pilot ladder should be provided and a lee given. Pilot boards from 0600 hrs. to 2359 hrs., though generally vessels not wishing to work cargo immediately will not enter the port outside daylight hours. Vessels may leave up to 2359 hrs. or later by arrangement with the Harbour Master in special cases.

Master to contact 'Ras Al Khaimah Port Control' on VHF Channel 16 at least 2 hours prior to arrival. ETA cables to be sent to the "Harbour Master MINASAQR Ras Al Khaimah" and also to Agents. Vessels to keep listening watch on VHF Channel 16 and await instructions from port.

ANCHORAGE: The area bounded by the port limits and to seaward of the main breakwater has been reputed as an area with good holding ground. Depths are from 11 to 14 m.

RESTRICTIONS: Vessels may enter or leave the port between 0600 and 2359 hrs. or later by arrangement with Harbour Master in special cases. No restrictions on entering during tides.

MAX. SIZE: No restrictions on breadth of a vessel but length not to exceed 800 ft. for easy berthing. Permissible draft in all the berths is 38 ft. Range of tide is maximum 1.6 m.

HEALTH: Normal quarantine regulations apply and pratique is granted subject to port health authorities approval. The health officer boards the ship only when vessel alongside. Suspected disease or fever on board vessel to be reported to Harbour Master by cable prior arrival and await instructions.

RADIO: All cables to be routed through Bahrain Radio. Vessels should cable their Agent, at least 72 hours prior to arrival, the ETA, LOA, expected draft on arrival, cargo and hatchwise stowage.

VHF: Port equipped with VHF Radio standby Channel 16 with many other working channels. Port Signal Station is at present manned between 0700 hrs. to 1400 hrs. only but can be contacted from 2 hours prior to vessels arrival if advance ETA notice is given to the authority. Vessels should report the ETA, LOA, draft, details of cargo to be discharged, stowage, etc.

RADAR: Presently port not equipped with radar.

TUGS: Tugs join the vessel at anchorage, the practice being to secure alongside, using ship's lines. Derricks should be swung in and gangways hoisted. Tugs are fitted with VHF.

BERTHING: The harbour and entrance channel is 40 ft. MLWST. A draft limit is imposed of 38 ft. The harbour provides 165 acres of sheltered water and is enclosed by main and lee breakwaters. Deep water quays totalling 1,490 m. in length will provide berthing facilities for 7 ships. Included in this are 2 Ro/Ro ramps and 2 of the berths will be available for container traffic. Plans are now being developed for the installation of a container crane and supporting equipment.

The small boat harbour and fishing harbour provide a further 725 m. of quay, and offer a dredged depth of 15 ft.

All the 7 berths, including 2 Ro/Ro berths are now in operation.

Distance between quay and water level maximum 3.8 m. at LW and 2.2 m. at HW.

Discharging to be carried out using ships gear. All berths are general cargo berths. Berths Nos. 3 and 5 have ramps for Ro/Ro vessels.

CRANES: No shore cranes available at berths therefore vessels calling should be self-sustaining. Mobile cranes of various capacities available locally for hire if required. No floating cranes available at present.

BULK CARGO FACILITIES: No special berth allocated for discharge of bulk cargo. Bulk cargo handled at present are Iron Ore, Gypsum and Bauxite and vessels with this cargo are allotted any of the general cargo berths subject to availability. No conveyor system or special equipment exist at present and as such cargo is discharged using vessels derricks and suitable slings.

SPECIALISED CARGO-HANDLING FACILITIES: Have 2 berths, Nos. 3 and 5 with ramps to accommodate Ro/Ro vessels. Port has plans for installation of a container crane and supporting equipment.

BRIDGES: Nil.

STEVEDORES: Advance ETA cable to be sent by Master to the vessels' Agents to order required gangs to work on board vessels. Labour gangs are supplied by a labour contractor, holding monoply, and the gangs work on board the vessel directly under the supervision of the vessel's officers and the stevedoring company accepts no responsibility whatsoever for any damage either to the vessel or its cargo. Subject to proper stowage and vessels capability average rate of discharge per gang per day of 3 shifts working would be as follows;–

General cargo	Approx. 60/80 tons
Steel/Timber	Approx. 140/180 tons
Bagged cargo	Approx. 250/300 tons
Bulk Iron ore	Approx. 250/300 tons
Bulk Gypsum/Bauxite	Approx. 180/200 tons

Working Hours: 0700 – 1400 hrs. and 1600 – 2200 hrs.

MEDICAL: Advisable for Agents to receive at least 24 hour's advance notice of required medical attention but can also attend to this at short notice. Hospital facilities are available. Officers/Crew should have valid Smallpox, Cholera and Yellow Fever certificates.

TANKERS: No tanker berth in port or offshore. Tankers will discharge at any berth, through bunker line – this will be fuel and diesel oils only.

DENSITY: 1027.

FRESH WATER: Fresh water available in berth Nos. 1 to 6 with 2 points to service tanks fore and aft as required on a 24 hour basis. Cost of water will probably be Dh. 7/– per ton.

FUEL: Shell Markets (ME) Ltd. hold monopoly to supply bunkers (Fuel oil max. viscosity 1500 sec., Marine Diesel oil and Gas oil) to vessels in port. All sizes of reducers are available and the pumping rate is: Fuel oil 200 t.p.h.; Gas oil 250/300 t.p.h, subject to vessel's receiving capacity. Presently there are 6 bunker points in berths Nos.1, 2 and 3. Owners requiring bunker supply should stem nomination through Shell, London.

Marine lubricants of all brands can also be supplied provided nomination through the suppliers received sufficiently in advance.

FIRE PRECAUTIONS: The port has its own auxiliary fire brigade and, when required, the services of the Ras Al Khaimah fire brigade are available. The harbour tugs are fitted with fire fighting hoses and monitors.

CONSULS: None at this port but most of the consulates can be contacted at Abu Dhabi or Dubai.

REPAIRS: Few facilities are available at present but planned for the future. Fully equipped engineering workshops capable of carrying out fairly extensive repairs operate a 24 hour maintenance or repair service and are available from Dubai.

DRY DOCK: No drydock in Mina Saqr. The nearest drydock is the one under construction at Dubai which is expected to be ready early 1979.

SURVEYORS: Lloyds, ABS, NV and representatives of various classification bureaux and private surveyors reside in Dubai.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

HATCHES: Opening/closing of the hatches to be carried out by the crew with the assistance of the stevedores, if necessary.

CUSTOMS ALLOWANCE: Normally, bonded stores are not sealed by the customs authorities. However, only limited stock should be left with the officers/crew for their consumption on board vessel and the rest should be kept locked under the custody of the Master. Sale of bonded stores is strictly prohibited and persons indulging in this will be punished according to local custom.

REPATRIATION: Efficient crew changes and repatriation can be carried out on receipt of advance information.

AIRPORT: Ras Al Khaimah International Airport, situated about 45 kms. South of Mina Saqr, operate daily flights to various destinations.

TIME: Local time is GMT plus 4 hours.

HOLIDAYS: Normal Muslim holidays during which time port working hours will be restricted. Fridays are the weekly holidays.

POLICE/AMBULANCE/FIRE: Telephone numbers are:– 29351 for Police. 21251 for Ambulance. 21212 for Fire.

TELEPHONES: No arrangements for placing telephones on board vessels but each shed in the port is provided with a telephone and can be used for making local calls only.

For international calls, Agents offices situated outside port area should be used. Ras Al Khaimah has excellent communication to most countries as it has its own earth satellite station.

SERVICES: Ship chandlers, laundry, exchange of films, etc. available in Ras Al Khaimah. Radio/Radar repairs, tank cleaning equipment, scamping facilities, etc. can be arranged from Sharjah/Dubai.

SHORE LEAVE: Can be granted and for this purpose the agents should hand over a crew list to the immigration department who will issue shore passes. Prior to vessel's departure, Master to ensure that all shore passes are handed over to the Agents who will surrender them to the immigration department. Agents should advise Immigration Department by letter if any crew changes to be effected.

REGULATIONS: None.

DELAYS: No berthing delays.

DEVELOPMENTS: No major developments planned for the immediate future as this is a new port just completed.

AUTHORITY: Port Manager, Ras Al Khaimah Port Services.

AGENTS: International Shipping Agencies (Ras Al Khaimah) Ltd., P.O. Box 5162, Ras Al Khaimah, U.A.E. Cables: ISASHIP, Ras Al Khaimah. Telex: 9226 "ISASHIP RK". Tel: 21266, 21966.

MINA ZAYED (Abu Dhabi): 24.32 N. 54.23 E.

(See Plan Book)

COURTESY FLAG: Vessels calling at ports in the State of Abu Dhabi should fly the flag of the United Arab Emirates as a courtesy flag, and *not* the flag of the State of Abu Dhabi.

DOCUMENTS: 8 copies of Cargo Manifest are required, with full cargo particulars, such as Bill of Lading number, marks/numbers, description, weight and measurement. It is essential that all this information is given on the manifest for each consignment, and the manifests should reach the Agent prior to arrival of vessel in order to be submitted to the Port/Customs Authorities 48 hours before the ship is berthed.

Also stowage particulars should be given in full to enable the Agent to advise the Port Authorities of the equipment and labour required for efficient handling of the vessels.

PILOTAGE: Pilotage in Mina Zayed is compulsory.

Pilots will board incoming vessels 0.5 miles West of the Fairway Buoy. Ships should wait for Pilots in the area stated above and not enter the channel unless instructions to the contrary are given, and hoist the International Pilot signal.

Pilotage presently, and until further notice, is offered during daylight hours only, starting at 0300 hrs. GMT throughout the year – closing down as follows:

Pilots board in- and out-going vessels 1 hour before sunset or 1 hour before 1500 hrs. GMT whichever occurs first corresponding to the seasonal timings.

Night pilotage is offered, for the time being for Ro/Ro and container ships only, under the provision the ship's Agents provide mooring gang, pilot boat; and tug(s) if necessary; at the discretion of the Harbour Master.

RESTRICTIONS: The channel is 152 m. wide, marked by red and black light buoys on port and starboard sides. The channel presently has a depth of 9.2 m. Tides are diurnal; tidal ranges are: maximum 2.04 m. (6.7 ft.) – minimum 0.09 m. (0.3 ft.) during Spring and neap tides, respectively.

Also see "Pilotage".

ANCHORAGE: The area enclosed by a 2 miles radius between West and North of the Fairway Buoy in position 24° 34.1′ N., 54° 19.8′ E. Good holding ground; water depth – 10.0 m. A.C.D. Deep draft vessels find lightering anchorage West and North of "A.D. Delta" light buoy.

RADIO: Vessels are to give their ETA's by cable through Muscat or Bahrain Radio, addressed to "Port Authorities – Mina Zayed, Harbour Office". Telex 2731 Portex AH, at least 72 hours prior arrival.

VHF: Mina Zayed Port Control work 24 hours a day, information to be given on VHF Channel 16 and 67 as required by Port Control.

TUGS: 2 tugs are required on every ship when berthing. Four harbour tugs available, 2×2,400 h.p. and 2×1,600 h.p.

BERTHING: At present 16 berths; Nos. 4 to 9 and Nos. 14 to 19 for deep sea vessels up to 31 ft. draft. (No. 19 for bulk grain). Nos. 10–13 for small craft, total length of deep sea berths 2,320 m.

Tower crane for discharging available, mobile cranes of sizes varying from 5 tons capacity to 75 tons, 6 electric cranes are available, 5×5 tons, 1×10 tons. Also forklift trucks, etc., are available.

STEVEDORES: Arranged through Agent, labourers work under direct supervision of vessel and her officers. Normal working hours for stevedore labour are from 0700 to 2230 hrs. No floating cranes for heavy lifts but mobile crane of 75 tons capacity available for hire for shore work. Reasonable tariff for handling container, Ro/Ro, car-carrier also priority for berthing container, Ro/Ro, car-carrier vessels.

MEDICAL: Fully equipped Government hospital. Qualified personnel, and most medicines available.

TANKERS: See "Das Island" and "Jebel Dhanna".

FRESH WATER: Available at all berths in moderate quantities.

FUEL: Diesel oil and gas oil is available by barges.

FIRE PRECAUTIONS: The harbour tugs are fitted with fire-fighting equipment and in addition Mina Zayed Fire Brigade are available 24 hours a day.

LAUNDRY: Reasonably good laundries available at moderate rates.

PROVISIONS: May be arranged subject 48 hours notice to Agent.

AIRPORT: Regular scheduled international flights, also domestic flights within Gulf area.

TIME: GMT plus 4 hours.

HOLIDAYS: Friday is weekly holiday. Otherwise usual Muslim holidays observed. Cargo work generally not affected by holidays.

SHORE LEAVE: Permitted. A permit can be obtained from Immigration Department. Absolutely necessary that every crew member be in possession of valid seaman's book.

CLEARANCE: Port clearance must be obtained prior to departure.

DEVELOPMENTS: Two berths for container terminal will be equipped with the latest container cranes and equipment, 1 berth for Ro/Ro ramps. Completion date, June 1979.

Dredging channel to 13 m.; construction of a new dhow harbour West of Mina Zayed for small craft and for fishing boats depth 20 ft. with 2,000 m. of new quays.

AUTHORITY: Government of Abu Dhabi, Abu Dhabi Sea Port Authority.

AGENT: National Shipping, Gulf Agency Co. (Abu Dhabi) Ltd. POB 377, Abu Dhabi, U.A.E. Cables: "Confidence", Abu Dhabi. Tel. 43008. Radio: Marine VHF radio, stand-by on Channel 16 (156.8 mHz) and Marine HF, standing by on 3539 kc/s. Call sign "Confidence, Abu Dhabi". Telex 2248 ("GACAUH EM").

MUBAREK TERMINAL: 25.49 N. 55.11 E.

(See Plan Book)

LOCATION: The Mubarek Oil Terminal is situated off the island of Abu Musa, and is under the jurisdiction of the Emirate of Sharjah and operated by the Crescent Petroleum Company.

DOCUMENTS: One Crew List and valid Health Certificate.

EARLY DEPARTURE PROCEDURE: In force. Vessel's Agent signs all documents on behalf of the Master.

PILOTAGE: Vessels to be moored, anchored or manoeuvred at Mubarek Oil Terminal will be boarded by Company Mooring Master in the close vicinity of the suggested anchorage area. Vessels must not enter the restricted limits of the terminal unless a Company Mooring Master is on board.

Ships are requested to have a pilot ladder safely and securely rigged and ready for immediate use and long enough to reach the Company Mooring Master's launch. A combination of pilot ladder and ships accommodation ladder so arranged that personnel can first use pilot ladder until part way up the vessel's side and then transfer to the accommodation ladder is recommended, especially on very large ships. A light line should be ready to take aboard the Company Mooring Master's portable radio. There should be adequate lighting at night. Vessels will provide a lee for the Company Mooring Master's launch when boarding and leaving.

The Company Mooring Master may require the vessel to anchor at any time he deems it necessary for the safety of the vessel or moorings or both or for infringement of the terminal regulations.

The Company Terminal Superintendent shall be the sole authority as to when the terminal is open or closed for normal working due to weather conditions.

NAVIGATION AIDS: A floating barge named *Baraka 1* (82,000 d.w.t.) 546 ft. long, used for storage of crude oil and for accommodation and headquarters of terminal personnel lies permanently moored in position 25° 49′ 43″ N., 55° 11′ 49″ E. approximately 065° 6,000 ft. from the terminal's single buoy mooring. *Baraka 1* is equipped with normal navigational warning lights and aids as required by convention.

A permanent fixed oil production platform, incorporating crude oil treating facilities, rises approximately 50 ft. above water at 25° 50′ 43″ N., 55° 11′ 49″ E., approximately 000° 6,079 ft. from the aforementioned *Baraka 1*. Said structures are equipped with 1 clear light flashing "U" code on each corner and a fog horn operating 2 seconds on and 18 seconds off. A permanently fixed flare structure (tripod) rises 150 ft. (flare tip) above water at 25° 50′ 56″ N., 55° 12′ 00″ E., approximately 037°, 1,716 ft. from the oil production platform.

READINESS: Notice of Readiness will not be accepted as at time of arrival unless the vessel is in all respects ready to load. Arrival time will be considered the time the Company Mooring Master boards the vessel, or the time the vessel is within the approved anchorage area, whichever occurs first. Notice of Readiness is to be in English.

ANCHORAGE: An anchorage area diameter 6,000 ft. has been established with the centre in position 25° 46′ 45″ N., 55° 13′ 13″ E.

When arriving by day display flag "Q"; by night display Red Light over White Light for Quarantine Service.

RESTRICTED AREA: A restricted area of approx. 38 sq. miles has been established with a boundary formed by an imaginary line from:

(a) 25° 54′ 26″ N. 55° 13′ 49″ E. in a W.S.W. direction
(b) 25° 15′ 14″ N. 55° 07′ 19″ E. thence in a S.S.E. direction to
(c) 25° 46′ 33″ N. 55° 09′ 37″ E. thence in a E.N.E. direction to
(d) 25° 49′ 44″ N. 55° 16′ 08″ E. thence in a N.N.W. direction to the position above.

RESTRICTIONS: Max. distance bow to manifold – 560 ft.

MAX. SIZE: 350,000 d.w.t.

HEALTH: Customs, Federal Police and Immigration Officials will board the vessel as soon as possible after arrival to give inward clearance and "pratique" service. When arriving fly "Q" flag by day. And red over white light at night.

RADIO: Initial communication by radio between ship and Crescent Petroleum Company should be via Bahrain Radio, call sign "A9M", which operates on a 24 hours basis.

Company Mooring Master will have sole control of radio installations during the period a vessel is manoeuvring or moored, and no radio transmissions will be permitted on board ship except by the express permission of the Mooring Master in each case, only the Mooring Master may transmit on Channels 12 and 6 during the period he is on board. He will have a VHF radio telephone with him.

Mubarek Oil Terminal Radio Station call sign "Crescent–2" particulars are as follows:

Operated by Crescent Petroleum Company, Sharjah, position Lat. 25° 49′ 43″ N., Long. 55° 11′ 49″ E.

Frequencies: Channels 69 and 73 on VHF.

Hours of operation: 24 hours per day.

Mubarek Oil Terminal Control Centre keeps continuous watch on VHF radio telephone Channel 69. Vessel approaching the terminal not having Channel 69 will be contacted on Channel 16 when the terminal will request her to switch to an alternate channel.

Channel 73 is reserved for communications between ships in moorings and Mubarek Oil Terminal Movements Control Centre. This is a safety measure since oil flow to ships is controlled through Channel 73, which therefore must be clear at all times in case of need to stop oil flow for any cause.

Channel 16 is for calling and safety use only.

In emergency failure of Radio and/or Radio Telephone communication daylight lamp signalling may be used with the Oil Movements Control Centre located on *"Baraka 1"*.

It is most important that ships establish communications with the terminal not less than 72 hours prior to arrival at the terminal giving ETA. Further ETA signals should be sent when the vessel is 24 hours, 12 hours and 4 hours distant, or any time a change of 1 hour in original ETA occurs. These messages should state specifically whether ETA is given in GMT or Local Time. The 72 hour signal should include the following:

ETA.
Last Port of Call.
If any Sickness on Board.
If vessel has Clean Bill of Health.
Cargo quantity and Grades expected to be lifted in long tons.

The 12 hour signal should include definite indication as to whether the vessel is ready to load or not and should also include information on the time she will require to discharge ballast after arrival. Precise time of arrival should be given when the ship is 4 hours distant from the terminal.

Unreasonable insufficiency or inaccuracy in ETA messages may alter the order of berthing of ships to the advantage of those ships giving sufficient and accurate ETA messages. Acceptance of Notice of Readiness will also be affected by such insufficiency or inaccuracy.

On receipt of first signal from a vessel, terminal will transmit a message to her giving preliminary requirements of terminal. Masters are urged to comply with this in all details in order to facilitate vessel turnaround and government formalities.

TUGS: The Company maintains launches to assist in mooring and unmooring vessels. These are under the direct supervision and control of the Company Mooring Master.

BERTHING: Vessels to load crude oil cargo will be normally accepted and berthed in chronological order of arrival provided such vessels have current nomination for cargo valid at the time of tender, carry clean ballast if any, and have cargo tanks in a fit condition to receive cargo. Also, they must be in all respects properly equipped and ready to moor. Should berthing be delayed on account of bad weather, vessels will keep their position in line.

Vessels required to leave the terminal area on account of bad weather should keep in contact with the terminal via the Company radio station at Mubarek Oil Terminal, call sign Crescent-2, in order that they may be available when the weather is fit for resumption of operations. The Company reserves the right to load vessels out of turn following the return of good weather, to the extent that such loading "out of turn" does not materially delay the loading of other vessels in line. Further the Company reserves the right to decline to moor a specific vessel if its condition or facilities are unsafe for mooring or loading even though the terminal may be open to other vessels.

The Company Terminal Superintendent's decision on this will be final.

S.P.M.: The single point buoy mooring berth (SBM), 11 m. in diameter and located in 163 ft. of water, is designed to handle tankships in the 350,000 d.w.t. class, but fitted at present with hoses for vessels of 250,000 d.w.t. ASA 150 pound flanged connections and one 20 in. floating hose, reduced to 12 in. Tanker Rail Hose for connection to export tanker's loading manifold, the length of hose being 940 ft.

Average loading rate is 16,000 b.p.h. The SBM is also provided with one permanently attached 21 in. circumference synthetic fibre floating mooring lines.

EQUIPMENT: Vessels must have suitable winches or capstans in good operating condition on the forecastle deck. Constant tension type winches may not be used except when they can be solidly locked and the constant tension feature not used.

All vessels should have ready messenger lines on forecastle head for bringing 2 mooring lines aboard from single point mooring (SBM).

Mooring winches on forecastle head for handling two 10 in. circumference synthetic fibre floating pick-up lines from SBM.

Adequate chafing gear to prevent damage to mooring lines.
Adequate mooring bitts to secure mooring lines.
Hose lifting winch, derrick and gear rigged for 7.5 tons.

HOSES: After the vessel is securely moored the cargo hose will be hoisted on the port side. The hose is lifted by ship's gear and crew, and all connecting of the hose will be done by them. The lifting derrick, equipment tackle, etc., should be topped off and ready on arrival. Terminal loading hose is fitted with ANSI 150 pound flat face flange and ships should have adapters and fittings to enable this hose to be connected to the ship's manifold. The Company Mooring Master advises the ship's personnel in hose lifting and connecting procedure; however, a deck officer must be present and must direct the ship's crew in all handling. The Company Mooring Master may reject a ship for unsatisfactory hose handling.

Do not close valves against crude flow.

Emergency flow stop signal if all communications fail will be a continuous sounding of the ship's whistle from either export tanker or *Baraka 1*.

CARGO SPECIFICATIONS:

Approx. Mubarek crude specifications:

Gravity	37 A.P.I. (approx.)
Sulphur	0.6%
B.S.&W.	Two tenths of one per cent or less by volume.
Metals	Not in excess of trace (100 PPM).
Viscosity	52 SSU at 120° F.
Flash Point	Below ambient temperature.
Pourpoint	30° F.
H_2S	Present

FRESH WATER: Not available.

FUEL: Not available.

CONSULS: Various consulates are located in Abu Dhabi and Dubai.

REPAIRS: No repairs, painting, etc., are to be made while berthing unberthing or in the berth.

CUSTOMS: Cigarettes, cigars, tobacco, matches, spirits, wines, beers, perfume, arms, ammunition and possibly other items have to be locked up under Customs seal from time of arrival of ship until time of leaving territorial waters.

TIME: Local time is GMT plus 4 hours throughout the year.

SERVICES: No supplies of any kind and no medical services (except in case of emergency and subject to a doctor being available), or other services are available at Mubarek Oil Terminal.

SHORE LEAVE: Not permitted.

GENERAL: *Light Dues:* The Middle East Navigation Aids Service (MENAS) charges light dues according to the size of the vessel and the number of visits to the Gulf during the year.

Positively no provision is made for dirty ballast: Any ship arriving with dirty ballast will be rejected and all costs accruing therefrom will be to the ship's account. Notice of Readiness shall not be accepted until vessel returns with clean ballast and tanks fit to receive cargo. She will on second arrival tender a new notice of readiness to load.

Fire towing wires required fore and aft.

No swimming permitted whilst vessel in berth.

No fishing permitted at the berth or within the restricted navigation area.

AUTHORITY: Crescent Petroleum Company.

AGENT: Gulf Agency Co. (Sharjah) Ltd. P.O.B. 435, Sharjah. Cables "Confidence", Sharjah. Telex 68019 ("68019 Confid SH"). Telephone: 22163, 23503.

MUBARRAS ISLAND, Abu Dhabi: 24.26. N. 53.32 E
(HALAT AL MUBARRAS) (See Plan Book)

FLAG: All vessels calling at Mubarras are required to fly the national flags of Abu Dhabi which are available from ship's Agent.

LOCATION: Mubarras Island is located approximately Lat. 24° 28′ N., Long. 53° 22′ E., some 55 miles W. of Port of Abu Dhabi.

The island constitutes export terminal of crude oil produced by Abu Dhabi Oil Company Limited (Japan). Crude oil produced from the Company's Mubarras oilfield is transported to Central Facilities Platform (CFP) situated approximately 19 miles E.N.E. of Mubarras Island by 4 in. to 14 in. flowlines, thence relayed by a 18 in. transmission line to the Island. The Company has tank storage for 1,548,000 barrels of crude oil on the island.

Tanker loading is accomplished by means of a single-buoy-mooring (SBM) system installed about 8 miles offshore East of the Island.

Average API Gravity of crude oil to be located is 38° and flash point is below 35° Fahrenheit.

PORT LIMITS: The port area of Mubarras and its approaches cover the area bounded by straight lines connecting the following points:

(a)	24° 30.0′ N.	53° 36.0′ E.
(b)	24° 24.0′ N.	53° 36.0′ E.
(c)	24° 24.0′ N.	53° 27.0′ E.
(d)	24° 26.7′ N.	53° 21.7′ E.
(e)	24° 30.0′ N.	53° 21.7′ E.

Masters of all vessels entering the Port must follow instruction from the Company's Port Master as to approaches, anchoring, berthing and unberthing.

APPROACHES: *Approaches to Mubarras:* Japanese Charts No. 3173 and No. 3174 cover the approaches to Mubarras. For tankers arriving at Mubarras without necessary charts full information shall be given by telegram if a request is sent to "Confidence" Abu Dhabi via "GNV" Bahrain radio a few days before arrival.

Alternatively, if the vessel has VHF, the buoy positions shall be given to her upon request to "Mubarras Terminal" as she approaches but prior notice of requiring this service should be given in the vessel's arrival message.

Charts: The following charts are recommended for use in Abu Dhabi waters:

Japanese Charts Nos. 3173 and 3174
British Admiralty Chart Nos. 3733, 3734, 2889 and 3716.

Approaches to Mubarras – Navigational Aids:

Buoy Nos.	*Latitude North*	*Longitude East*	*Colour*	*Light Character*
Mubarras Approach	24° 57.00′	53° 18.39′	Red	Fl. R. ev. 5 sec.
Mubarras Entry	24° 52.34′	53° 18.42′	Red	Fl. R. ev. 10 sec.
1	24° 49.44′	53° 17.29′	Black	Fl. W. ev. 10 sec.
3	24° 43.89′	53° 21.60′	Black	Fl. W. ev. 5 sec.
4	24° 42.01′	53° 27.38′	Red	Fl. R. ev. 3 sec.
5	24° 38.56′	53° 31.68′	Black	Fl. W. ev. 3 sec.
6	24° 31.87′	53° 40.58′	Red	Fl. R. ev. 2 sec.
7	24° 33.93′	53° 40.12′	Black	Fl. W. ev. 5 sec.
8	24° 30.81′	53° 40.93′	Red	Fl. R. ev. 5 sec.
9	24° 31.93′	53° 40.20′	Black	Fl. W. ev. 2 sec.
10	24° 29.97′	53° 40.72′	Red	Fl. R. ev. 3 sec.
11	24° 30.33′	53° 40.43′	Black	Fl. W. ev. 3 sec.
12	24° 28.93′	53° 40.43′	Red	Fl. R. ev. 5 sec.
13	24° 27.33′	53° 38.17′	Black	Fl. W. ev. 5 sec.
14	24° 26.17′	53° 37.00′	Red	Fl. R. ev. 3 sec.
15	24° 26.38′	53° 36.63′	Black	Fl. W. ev. 3 sec.
17	24° 26.00′	53° 33.00′	Black	Fl. W. ev. 2 sec.

Note: Black coloured and white flashing buoys are showing the starboard side of the channel.
Red coloured and red flashing buoys are showing the port side of the channel.
"Mubarras Approach", Mubarras Entry, No. 1, No. 3, No. 4, No. 5 and No. 7 buoys are fitted with radar reflectors.

How to Steer in the Mubarras Channel: (Inward)

Point Nos.	*Position Lat. North*	*Position Long. East*	*Course (True)*	*Dist. (miles)*
1	24° 57.00′	53° 17.80′		
			180	7.45
2	24° 49.55′	53° 17.80′		
			144	6.55
3	24° 44.30′	53° 22.05′		
			120	10.55
4	24° 39.00′	53° 32.00′		
			123	8.90
5	24° 34.10′	53° 40.30′		
			176	4.00
6	24° 30.20′	53° 40.70′		
			214	3.50
7	24° 27.30′	53° 38.55′		
			240	2.20
8	24° 26.20′	53° 36.40′		
			261	3.10
9	24° 25.70′	53° 33.05′		
			Total Distance:	46.25

Anchorage Position	24° 26.80′ N.	53° 34.00′ E.
S.B.M. Position	24° 25.98′ N.	53° 31.54′ E.

Navigation in Shallow Waters: There are some shoals with depth of 14.9 m. (49 ft.) in the area between Buoy No. 14 and No. 15. Masters of outgoing vessels should pay due consideration to the effect of draw down at speed on vessel's draft in the shallow water, bearing in mind vessel's trim.

Conspicuous Marks: Quick flash White navigation lights (visibility range 5 miles) are fixed on following platforms and the flare stacks adjacent to each platform are visible from distance:

MR-6 Platform	24° 35′ 44″ N.	53° 43′ 53″ E.
CFP	24° 30′ 09″ N.	53° 42′ 09″ E.
AA Platform	24° 26′ 15″ N.	53° 39′ 53″ E.

DOCUMENTS:
2 Crew Lists.
2 Passenger Lists.
2 Manifests.
1 International Maritime Declaration of Health.

PILOTAGE: Pilot is provided by the Company free of charge at the request of the vessel's Master based on express understanding and condition that he is aboard the vessel for the purpose of assisting the Master and becomes, for such purpose, the servant of the owners of the vessel.

It is recommended that the Master of the vessel calling at Mubarras for the first time requests Pilot to go aboard the vessel for both inward and outward passage of the channel. The Pilot will normally board the vessel in the vicinity of No. 5 Buoy and will advise the Master on approaches to the berth and he will remain on board to act as Mooring Master and direct loading operations.

Mooring Master: The Mooring Master provided by the Company will undertake pilotage, mooring and unmooring of the tankers.

The Mooring Master shall board vessels to be moored at SBM in the anchorage area or in the vicinity of No. 17 Buoy. The Mooring Master will advise the Master of vessel on approaches to the SBM, mooring, unmooring, connecting and disconnecting hoses and all other operations within the port area. All manoeuvring of vessels within the port area shall be done only in accordance with the advice of the Mooring Master, subject to the understanding that in all cases and circumstances the Master of the vessel shall remain solely responsible for the safety and proper manoeuvring of the tanker. Master or one of his qualified deck officers must be on the bridge at all times while the vessel is being manoeuvred.

ANCHORAGE: The tanker anchorage is within 0.5 miles radius of Lat. 24° 26.8′ N., Long. 53° 34′ E. Depth of water varies from 15.5 to 18 metres (50 to 59 ft.) The sea bed all around the anchorage is coral with approximately 6 ft. of loose sand. Holding is poor and a vessel is advised to pay-out at least six shackles of chain.

Vessels will be advised by radio of a suitable anchorage if both anchorage and the berth are not immediately available. Vessels should under no circumstances anchor or wait at the South area of Lat. 24° 57′ N. without obtaining prior approval of the Port Master.

Anchorage for Dry-cargo Ships: Anchorage for dry-cargo ships is directed by Port Master by VHF radio.

Prohibited Area for Navigation and Anchorage: The area within 1.15 miles radius from CFP is prohibited for navigation and anchorage. No vessels shall anchor within the range of 1.5 miles from submarine pipe-lines.

MAX. SIZE: See "Approaches" — depth over shoal areas; also see "Tides".

HEALTH: Vessels arriving at Mubarras Terminal must carry the usual Bills of Health for ports visited on the voyage. Masters of vessels are requested to inform the Company if there is any person ill on board or if there has been sickness within the week prior to arrival.

Pratique is usually granted by Port Medical Officer through the Mooring Master or Agency Clerk.

RADIO: *Notice of Arrival:* Vessels should advise their ETA Mubarras at least 72 hours and again 24 hours before arrival through normal radio service. As an alternative to the route through Bahrain Radio Station (GNV) vessels may send their first message through Singapore or Bombay.

Confirmation of ETA should be made a few hours before arrival at "Approach Buoy" by calling "Mubarras Terminal" on Channel 16 VHF. After anchoring, vessels should advise their time of anchoring through VHF and thereafter maintain a continuous listening watch on Channel 16 until the Company's Mooring Master boards.

Tankers bound for Mubarras should advise their ETA and other information 72, 48 and 24 hours before arrival.

Vessels may find it helpful to route their first message through Singapore, Bombay or Bahrain Radio Station. All cables should be addressed to the Company through ship's Agent.

The first message should be sent according to the following form, but any items which are the same with a recent previous voyage to this port may be omitted.

(1) ETA Mubarras.
(2) Last Port.
(3) Next Port.
(4) Deballasting time.
(5) Quantity of cargo required.
(6) Maximum loading rate.
(7) Diameter of cargo manifold.
(8) Distance from manifold to ship's side.
(9) Derrick capacity.
(10) Diameter of fairlead.
(11) Name of Master.
(12) Number of crew.
(13) Whether Pilot is required or not.

Radio Station in Mubarras Terminal Office.

Short-range communication to Mubarras Terminal office can be made by calling "Mubarras Terminal" on VHF radio telephone. Vessels should inform the office with their ETA preferably when they pass the Strait of Hormus. After anchoring, vessels should advise anchoring time and maintain a listening watch on Channel 16 until Mooring Master boards.

Call Sign: "Mubarras Terminal"

Frequency:	*Reception*	*Transmission*
F3	Ch. 16	Ch. 10, 12, 14

Operating Periods: Round the clock.

BALLAST: All vessels arriving at this port are required to have on board sufficient clean ballast to give a safe draft for manoeuvring purposes. Vessels arriving with insufficient ballast may be required to increase the quantity, should the Mooring Master consider that it would not be safe to berth the vessel for loading. As a general rule, vessels shall not start discharging ballast until mooring is completed.

Upon completion of deballasting the Mooring Master will inspect the tanks. If the tanks are not satisfactory, he may require further pumping until such time as they meet the required standard.

It is strictly prohibited to discharge oil, oily water or other refuse that may result in pollution of the sea. International oil pollution regulations must be strictly observed by all vessels. *The terminal does not have facilities to receive oily ballast.*

TUGS: Following vessels are always available for use for marine operations at this port.

Name of Vessel	*G.R.T.*	*B.H.P.*	*Spd. (kt)*
No. 1 Union (Tug/workboat)	499	1,120×2	12
No. 2 Union (Passenger boat)	50	480×2	14
No. 3 Union (Mooring boat)	25	195×2	11

BERTH: *Position of Buoy:* Lat. 24° 25.98′ N. Long. 53° 31.54′ E. *Depth of Water,* 15.5 m. (50.85 ft.).

The berth is a single-buoy-mooring system consisting of a buoy 44.32 ft. (13.5 m.) in diameter, moored to 6 pendant legs of 3 in. high strength chain shackled to anchor piles at a radius of 855 ft. (260 m.), and having a rotating deck carrying the pipe-line and mooring connections.

One 32 in. crude oil line has been laid approximately 52,500 ft. (16 km.) from the shore to a position close under the buoy. From the underwater manifold the crude oil goes to the buoy through a 20 in. underwater hose. The connection between turntable piping of SBM and tanker manifold consists of 1 hose string composed of 24 in. and 20 in. (Length 770 ft.) floating hoses and 2 hose strings composed of 16 in. (Length 120 ft.) tail hoses.

LOADING: The maximum loading rate of crude oil is 40,000 bbls./hr. or 6,400 kl/hr.

Notice of Readiness: The Master of each vessel should present a Notice of Readiness to load to the Company's Mooring Master who will sign it on behalf of the Company.

The Notice of Readiness should be tendered at the time of the vessel's arrival at the tanker anchorage area, which is, in principle, understood to be either the time of dropping the anchor in the anchorage, or, if the vessel does not anchor, the time that the Mooring Master boards to commence berthing.

The vessel, however, is prohibited from berthing unless she reaches No. 5 Buoy at least 5 hours before the sunset, and Notice of Readiness will not be accepted until the next sunrise even if the vessel has already anchored in the tanker anchorage area.

Notice of Readiness will not be accepted during periods when the port is closed. The port is "closed" when the weather is such that it is too rough for incoming tankers to berth. The decision regarding the opening and closing of the port will rest with Port Master.

When the vessel is ready in all respects for loading the ship's officer must inform the Mooring Master who will transmit the necessary messages to the control room on shore. Mooring Master is authorised to control all the loading operations.

All cargo documents and shore figures are usually prepared on board and the Mooring Master will sign the documents on behalf of the Company.

MOORING: The Company reserves the right to refuse to accept for berthing or loading any vessels considered unsuitable by reason of inadequate or unsatisfactory mooring equipment, insufficient derrick capacity, unusual manifold connection, inability to comply with the Safety Regulations, or any circumstances which would create unusual risk to the Company's berth, facilities, personnel and equipment whatsoever.

Preparation: Before Mooring Master boards, vessels should have ready the following:

(a) Jacob's ladder on lee side.
(b) Hawser 1 each at fore and aft deck, polypropylene if possible.
(c) 1 steel crowbar.
(d) Port derrick with double wire rigged for minimum lift 5 tons.

After vessel is anchored, the Company's mooring and hose connection crew will board and pick up mooring and hose connection materials from tug/workboat. Vessel is requested to provide windlass and winch operators.

Mooring at Berth: Unless pilotage is required the Mooring Master will board the arriving vessels in the anchorage area. Vessels are requested to have pilot ladder safely and securely rigged ready for immediate use and long enough to meet the Mooring Master's launch. Vessels should have their crew standing by ready to receive mooring and hose connection materials and should maintain a lee until this is completed. Mooring Master will instruct the crew in the setting up of the forward mooring.

2 bollard ropes are made fast round the port bitts with their attached shackles about 5 ft. inboard from the fairleads as far forward as possible. The size of the fairlead opening should be at least 300 mm. (12 in.) to prevent chain from jamming in the fairleads.

Attached to the mooring connections on the buoy are two 18 in. nylon ropes (144 mm. dia., breaking strain 250 tons). These ropes are 50 m. long, and have at their free end a length of stud link chain which includes enlarged end link for receiving the shackles used on the deck of the tanker. From the outer end of this chain there are connected 2 mooring lines consisting of pick-up wires, pick-up ropes and a towing rope (port side only). The nylon rope is supported by "doughnut" floats and the chain is hung by large plastic buoys 5 ft. in diameter and coloured red and yellow.

Hose Connection: After completion of mooring the boat which has been holding the hoses clear during berthing will bring the floating hose to the ship's side and connect the derrick runner to the balance buoy. These are lifted aboard one by one and connected by distance piece which was already connected to vessel's manifold by hose connection crew during mooring operation.

Unmooring: After the hose disconnection is completed, mooring ropes are slacked off and then dropped into the water. Tug/workboat will come alongside either before or after the vessel backs off the berth, whichever is convenient, and will receive mooring and hose connection materials.

TIDES: The maximum tidal range in this area is 6 ft., the average tidal range at the Spring tide 3 ft. and the Chart Datum is 0.7 ft. below ISLW. Tidal stream is variable according to the place and the lay of the land. But the flowing tide usually runs South-Eastwards and ebbing tide North-Westwards. Speed of a current is around 2 knots at the highest.

"Tide and Current Table" is published annually by the Company, applicable to Mubarras and the surrounding area, and will be obtained on application to the Company.

WEATHER: Local weather at Mubarras is almost similar to that of Jebel Dhanna and Abu Dhabi City, being extremely hot and humid in Summer. Temperature sometimes soars as high as 50° Centigrade with almost 100 per cent humidity in July and August.

MEDICAL: The Company does not operate a clinic and hospital at Mubarras. But when necessary, Master may obtain medical attention for ship's personnel from the ship's Agent who may in the case of serious illness or injury recommend treatment at the Abu Dhabi government hospital. The ship owner will be charged for all expenses incurred.

FRESH WATER: Not available at Mubarras except in case of extreme emergency.

FUEL: Not available.

CONSULS: No consular business is available at Mubarras. However, various countries have representations in Abu Dhabi.

REPAIRS: There are no repair facilities at Mubarras. However, radar and electronics repairs are available in Abu Dhabi and technicians can be sent to Mubarras for repairs through notifying the ship's Agent.

SURVEYORS: Lloyds, ABS, Veritas surveyors are available in Bahrain and they can be brought in if ample notice is given to ship's Agent.

CUSTOMS: Under normal circumstances Customs officers do not board tankers at this port but upon arrival the Master is required to submit to the Customs through the ship's Agent a manifest of any cargo to be landed at Mubarras.

After loading is completed the Mooring Master will sign on behalf of Customs an outward manifest and issue the port clearance. These will be handed to the Master by the Agent.

REPATRIATION: Repatriation of ship's personnel may be accomplished by special arrangements through the ship's Agent who should be informed well in advance of the vessel's arrival. Launch or helicopter fare in case of repatriation will be charged to Owners.

TIME: Local standard time at Abu Dhabi is GMT +4 hours throughout year.

FIRE-FIGHTING: Tug/workboat "No. 1 Union" stationed at Mubarras Island is equipped for fire fighting. She is capable of pumping 1,700 gallons of water per minute from 3 nozzles and is usually on emergency stand-by during tanker loading operations.

GENERAL: *Engine:* The main engines and all gear must be in an operable condition and in a state of immediate readiness whilst the vessel is on the berth.

Stores: Provisions and deck stores not available.

Divers: The services of the Company diver may be available to vessels where it is essential that a diver's services are required to enable a vessel to sail. All requests for such services should be routed through the ship's Agent to the Port Master.

Currency: All currencies approved except Israeli.

Mail: Mail can be received and sent through ship's Agent.

Dry Cargo Discharge: A "T" shaped jetty at Mubarras Island can accommodate a vessel with maximum 12 ft. draft. Discharge of dry cargo must be arranged well in advance through ship's Agent in Abu Dhabi who will supply labour and barges from Abu Dhabi. No gear whatsoever is available at Mubarras.

SAFETY:

No Smoking: Smoking on board the ship is strictly prohibited except in the smoking room situated in the aft accommodation and which has been jointly agreed between the Mooring Master and the Master.

The responsibility for the strict observance of the safety of these rooms rests with the ship, and the Company reserves the right to prohibit smoking in these rooms also should situation require at any time.

Accommodation: All accommodation doors, port holes and ventilators must be closed during loading operations, and doors and openings to machinery spaces in vicinity of ship's tanks are also to be closed.

Galley and Boiler Fires: As a general rule, the use of galley and boiler is not permitted. However, those appropriately equipped are considered safe for use, and their use will be mutually agreed between the Master and the Mooring Master.

Radio Equipment: Radio, radar or other electronic equipment must not be energized while the ship is on the berth.

Air-conditioning Units: For safety, it is preferable that these units recirculate the air within the accommodation but their use when drawing air from outside the accommodation may be permitted provided that the Master and the Mooring Master agree that no danger exists. Should any gas be detected within the accommodation or should there be any danger of gas within the accommodation these units must be stopped and the intakes closed. Window-type air-conditioners are forbidden at all times.

Ship's Fire-fighting Equipment: This equipment must be in constant readiness at all times with sufficient people on board for its efficient operation.

Fire Watches: While the vessel is within the port area a continuous and efficient fire watch shall be maintained on deck and in the engine room by the ship's crew. Fire-fighting equipment shall be in instant readiness throughout the vessel and additional extinguishers must be available at the loading manifold while hoses are being connected and disconnected. Water should be available on deck service lines at all times and fire hoses connected at all fire stations for immediate use.

Swimming: No swimming in the sea berth area is permitted while vessels are on berth.

AUTHORITY: Abu Dhabi Oil Co. Ltd. (Japan).

AGENT: National Shipping, Gulf Agency Co. (Abu Dhabi) Ltd. are appointed by Abu Dhabi Oil Co. Ltd. (Japan) as exclusive shipping Agents for all vessels calling at Halat Al Mubarras Terminal. The address particulars are as follows:

National Shipping, Gulf Agency Co. (Abu Dhabi) Ltd., POB 377, Abu Dhabi, United Arab Emirates, Cables: "Confidence", Abu Dhabi. Telex: 2248. Tel.: 43008.

ETA messages shall be sent to National Shipping, Gulf Agency Co. (Abu Dhabi) Ltd., cable address: "Confidence", Abu Dhabi, via Bahrain Radio.

Vessels can otherwise communicate with NSGAC, Abu Dhabi, over Marine Radio HF, frequencies: standing by on 3539 kc/s. and transmitting on 2170, 2301, 2368, 2738, and 3539 kc/s., call sign "Confidence", Abu Dhabi.

Vessels equipped with SSB radios can also communicate with NSGAC, Abu Dhabi, on the frequencies, standing by on 6910 mHz lower side band and transmitting on 3539 and 6910 mHz, call sign "Confidence", Abu Dhabi.

Under favourable weather and transmitting conditions communication can also be performed over the VHF radio on the following frequencies: standing by on Channel 16 (156.8 mHz) and transmitting on Channel 9, 10, 12, 13 and 14, call sign "Confidence", Abu Dhabi.

PORT RASHID, Dubai: 25.16 N. 55.16 E.

(See Plan Book)

FLAG: U.A.E. and Dubai.

DOCUMENTS: The following should be airmailed to Agent prior to ship's arrival.

6 Dangerous Cargo Lists.
2 Stowage Plans.
2 Hatch Lists.
7 Cargo Manifests.
2 Freighted Manifests.
1 each Bill of Lading.
4 Crew Lists required (on arrival).

APPROACHES: Black and white Pillar Buoy, flashing every 10 secs. in position Lat. 25° 21′ N. Long. 55° 14′ E. Marked "Dubai Approach".

Main light in position Lat. 25° 13.7′ N. Long. 55° 17.3′ E. (Situated on top of the Dubai Trade Centre) Group Flash (W) 2 every 30 secs. 157 m. above MHWST. Visible 30 miles.

Main breakwater light flashing (W) twice every 30 secs. elevation 9 m. Lee breakwater light flashing (R) every 2.5 secs. elevation 9 m.

PILOTAGE: Compulsory. Pilot will board 24 hours a day, from a launch and a Pilot ladder should be provided and a lee given. Large vessels calling at the dry dock should provide an accommodation ladder with its lower platform within about 12 ft. of the waterline and a pilot ladder rigged on ship's side adjacent to the accommodation ladder platform.

ANCHORAGE: Vessels should contact Dubai Port Control VHF, Channel 16 shifting to a working Channel as instructed. Failing instructions they should anchor approximately 3 kms. from the port entrance. Holding ground – Generally poor.

RESTRICTIONS: Minimum depth in channel 13 m. Max. rise and fall 2.0 m.

MAX. SIZE: Max. draft 11.5 m. (38 ft.). No restriction on length or beam.

TUGS: Two 2,000 h.p., one 2,500 h.p. and one 1,300 h.p. are available the practice being to secure alongside with 2 tug ropes therefore gangway and derricks should be secured in-board.

Tugs are fitted with VHF. Contact should be made via Dubai Port Control or the Harbour Master.

RADIO: The Port Signal Station (call sign 'Dubai Port Control') is fully equipped with VHF radio and watch is maintained 24 hours per day on Channel 16, switching to Channels 14, 12, 9, 6, 67, 32 port operations are controlled on Channels 65A and 66A; the Signal Station is fitted with VHF direction finding and recording equipment to assist in prosecuting stations contravening international radio procedure and regulations.

The Signal Station is situated at the seaward end of No. 1 berth at a height of 57 ft. above sea level.

Vessels should contact Dubai Port Control requesting berthing instructions.

Vessels should advise their Agents the arrival time, LOA, draft and position of bunkers, connections if bunkers are required and advise amended ETA where possible by VHF. They in turn will pass the information on to the Port Authority.

HEALTH: Normal quarantine regulations apply and pratique can be given by the Pilot on cargo vessels, always subject to the Health Authorities approval. Health Authorities only board when the vessel is alongside, except in the case of a suspected ship.

BERTHING: Vessels should advise their Agents of their ETA length overall and draft by VHF if possible. Agents should also be advised of any explosives or hazardous cargo on board to determine if it should be offloaded before berthing or otherwise.

37 deep water berths with 27 storage sheds (each 400 ft.×200 ft.) adjacent are available as well as 4 berths restricted to vessels with less than 6.10 m. (20 ft.) draft. Extensive hard surfaced yard storage areas. Each berth provided with forklift trucks and trailers. Cargo is discharged direct to sheds or to storage areas where mobile cranes from 5 to 40 tons capacity operate or by direct delivery to consignee's vehicles. 2 container cranes of 35 ton capacity are available on berth No. 10 and 2 – 40 ton container cranes on berths Nos. 33 to 37 (to come into service mid-1979) together with Karrilift, Karricon and other associated container handling equipment operating in a controlled container terminal. Refrigerated containers – electricity connections available.

A restricted number of vessels may anchor within the harbour breakwaters under instructions from the Harbour Master if so required, and may discharge/load ex-lighters.

Depths at Berths: No. 1 berth 10 m. (33 ft.), No. 2 berth 9.7 m. (32 ft.), No. 10 berth 10 m. (33 ft.), No. 3 – 16 berths (except No. 10) 9.3 m. (30.5 ft.), No. 17 to 27 berths 11.5 m. (38 ft.), No. 28 to 37 berths 13 m. (42 ft.).

FRESH WATER: Available at all berths. Rate 30 t.p.h. per hose.

FUEL: Shell Bunker Fuels are available at berths Nos. 1 to 4, 6 to 9 and 17 to 37 in addition to Tanker Berth and include fuel oil, thin fuel oils, diesel and gasoil: 48 hours' notice should be given to local Agents or Shell Markets (M.E.) Ltd., P.O. Box 307, Dubai. Tel: 432500; Telex: 5478 DB; Cables: Shell Dubai. Marine Lubricants and chemicals are available for delivery to the ship.

TANKERS: Berth operated by Shell Markets (M.E.) Ltd. Capable of taking vessels up to 260 m. long. Max. draft 11.3 m., vessels of 11.3 m. but not over 11.6 m. draft may be berthed by arrangement with the Harbour Master at HW.

CARGO HANDLING: *Working hours:* Saturday – Thursday, 1st shift: 0700 – 1400 hrs. 1400 – 1600 hrs.; Special shift: 1800 hrs. 2nd shift: 1830 – 2359 hrs.; night shift: 0001 – 0530 hrs. Friday – 1st shift: 0700 hrs – 1400 hrs.; 1400 – 1600 hrs.; Special shift: 1800 hrs. 2nd shift: 1900 – 2359 hrs.; Special shift; full night.

The Port Manager may order full night working.

Each berth is provided with fork-lift trucks and trailers. Pallets to assist cargo handling are available without charge. Cargo is discharged direct to sheds (400 ft. by 200 ft.) or to storage areas where mobile cranes varying from 5 to 40 tons lift operate.

Ship: Ships gangs are available for distribution to vessels through Agents, vessels should advise their requirements before arrival. The gangs board and operate under the supervision of ship's officers. No quay cranes are provided, so ship's derricks/cranes must be used, together with cargo handling equipment. A close liaison should be maintained with the Cargo Superintendent or Shed Supervisor at all times.

Lighterage; When berths are fully occupied, vessels may discharge/load ex-lighters at anchorage.

STEVEDORES: Gangs available, ordered by Agent before vessel's arrival. Gangs board and operate under supervision of ship's officer. Ship's gear used. Working hours: See "Cargo Handling".

MEDICAL: Qualified doctors and hospital available at Dubai, also Dentists.

AIRPORT: International airport, 3.2 km.

DRYDOCK: *Dubai Drydock:* A complete ship repair facility, managed by a consortium of 2 companies, C. H. Bailey Ltd., and Bristol Channel Ship Repairers Ltd., expected to be in operation by Spring 1979 is located immediately to the East of Port Rashid. Vessels up to 1,000,000 d.w.t. can be docked. Approach areas dredged to 11.5 m. enclosed by breakwater.

Dock No. 1 370 m.×66 m. (350,000 tonnes)
No. 2 525 m.×100 m. (1,000,000 tonnes)
No. 3 415 m.×80 m. (500,000 tonnes)

Dockside Cranes:

2×120 tonnes Safe working load at 65.5 m. radius.
1× 25 tonnes Safe working load at 80.0 m. radius.
2× 15 tonnes Safe working load at 70.0 m. radius.

REPAIRS: Galadari Engineering; P.O. Box 355, Dubai; Tel: 660803, Telex: Gabros DB 5443; Al Nasr Engineering Co. P.O. Box 1106, Dubai; Tel: 223624; Telex: 5638 DB; Cables: Alnasr – Dubai, and the services of the large Dry Dock Complex capable of accepting vessels up to 1,000,000 d.w.t. (See "Developments").

Round the clock service which ranges from major boiler repairs to repair of main diesel engines and auxiliaries, underwater welding, shot blasting hull cleaning and diving services. Gulf Lux

Marine Services Ltd., offer a wide range of in-water service including scraping, blasting and recoating. Technical Engineering and Marine Services (TEAMS) have 1 slipway which can accommodate vessels up to 1,000 tons. They are also able to handle all kinds of engine and hull repairs.

OFFSHORE SERVICES: Crew changes, delivery of ship's mail, stores, spares, etc., can be effected by service boats or helicopters. This service is carried out by Gulf Agency Co. (Dubai) Ltd. See "Agent".

JOINING/REPATRIATION: Arriving crew holding valid seaman's book can be cleared from the airport and placed on board on the strength of a guarantee letter from the Agent to the Immigration Office.

Repatriating crew can be brought ashore with a similar guarantee tendering the airticket to the Port Immigration Office. They must be picked up from the ship 24 hours prior to departure.

TELEPHONES: Situated in sheds, no connection made to vessels.

SHORE LEAVE: Agents collect all passports on vessel's arrival, together with 3 copies of crew list. Temporary shore leave passes are issued by the Immigration Office (situated at the Southern end of Shed No. 4) against passports and Crew Lists.

GENERAL: Refer to "Dubai" for all general information.

AUTHORITY: General Manager. Dubai Port Services.

AGENT: Gulf Agency Co. (Dubai) Ltd. POB 2404, Dubai, U.A.E. Cables: "Confidence", Dubai. Tel: 431300. (24 hours service). Telex 45448, 45809 ("GACDB EM") Radio: Marine VHF radio, stand-by on Channel 16 (156.8 mHz) Callsign "Confidence, Dubai".

Operators of ship-servicing and supply organisation: Crew changes, mail, spares and/or delivery of provisions undertaken at sea without deviation to serviced vessel.

RAS AL-KHAIMA: 25.45 N. 56.01 E.

There is a jetty, length 100 m., suitable for berthing smaller vessels, which is protected by a breakwater, and development plans include dredging the inlet to enable vessels with a draft of up to 25 ft. to berth.

DEVELOPMENTS: See "Mina Saqr".

AGENT: See "Mina Saqr".

RUWAIS: 24.09 N. 52.45 E.

Proposed temporary anchorage for construction cargo vessels is located between 24° 11′ N., 52° 44′ E. and 24° 10.6′ N., 52° 45′ E.

Approximate location of construction wharf is 24° 08.6′ N., 52° 45′ E.

Total length of the jetty 200 m. (completed). The jetty will be able to bear loads of 4 tons per sq. ft. A separate Ro/Ro jetty with a drive off ramp is also completed. The width of the opening where the Ro/Ro vessel will berth is 50 m. and the length 100 m. The height of the jetty at high water level is approx. 1.3 m. and chart Datum level 3.1 m. There is a temporary "L" shaped jetty with max. depth of 4 m. and length of between 60–70 m. for discharging cargo from barges.

Labour supplied by ADNOC's Sub-contractors.

Vessels proceeding to Ruwais must pass through Jebel Dhanna Tanker Channel where Abu Dhabi Petroleum Ports Operating Co. will be handling vessel up to anchorage.

AUTHORITY: Abu Dhabi National Oil Co. (ADNOC).

AGENT: See "Mina Zayed".

SHARJAH: (Mina Khalid) 25.22 N. 55.24 E.

(See Plan Book)

DOCUMENTS: The following documents must be in the possession of the ship's Master on arrival or must be forwarded to ship's Agent prior to ship's arrival:

Immigration:
2 Crew Lists.
2 Passenger Lists.

Customs:
2 Crew Lists.
2 Passenger Lists.
2 List of Alcoholic beverages.
2 Cargo manifests.

Port Operations:
2 Cargo Manifests.
2 Dangerous Goods List.
2 Stowage Plans.
Certificate of Registration.
Classification Certificates.

PILOTAGE: Pilotage is compulsory for all ships entering and leaving the deep water harbour. On entry, Pilots will board to seaward of the fairway buoy; a pilot ladder should be provided. Port Khalid will operate a twenty-four hour, seven-day week pilotage service.

ANCHORAGE: The fairway buoy in position Lat. 25° 22.9′ N. Long. 55° 20.85′ E. is a black pillar buoy flashing white every 1.5 seconds. Vessels approaching should await Pilot to seaward of fairway buoy, anchoring if necessary.

Protected Anchorage:

A limited number of vessels may anchor at moorings within the deep water harbour with prior approval of the Port Operator.

MAX. SIZE: Max. draft entering and leaving is 8.7 m. (28.5 ft.). Tidal range 1.2 m. (4 ft.). Deep water channel to berths Nos. 6 and 7 maximum draft is 10.15 m. (34 ft.).

HEALTH: Normal quarantine regulations apply.

Radio pratique will be granted on receipt of radio message from Master, via his Agent, stating that no serious illness has occured during the preceding thirty days. All Crew members must be in possession of valid smallpox and cholera certificates. The Health Officer will only board when the vessel is alongside.

RADIO: *Notice of Arrival:*

Vessels should advise their Agent ETA Port Khalid, giving draft, L.O.A., and intended cargo operations to be performed, at least 72 hours prior to arrival.

Agents should arrange berthing and labour with the Port Operator. Vessels should contact Port signal station on VHF Channel 16 (call sign "Sharjah Port Control") when within range. Working Channels 6, 9, 12 and 13.

TUGS: Tug services are available for all ships entering the deep water harbour. At the discretion of the Port Operator ships may be obliged to use the services of a tug or tugs.

Tugs are fitted with VHF.

The harbour tugs are fitted with fire fighting hoses and monitors and foam tanks.

BERTHING: Arrangements made with Harbour Master by ship's Agent for necessary berthing as required.

Berth No.	*Depth at LW*	*Date in Operation.*
1	30 ft.	In operation
2	30 ft.	In operation
3	30 ft.	In operation
4	30 ft.	In operation
5	30 ft.	In operation
6	34 ft.	In operation
7	34 ft.	In operation
		Ro/Ro berth
8	30 ft	Oct. 1978
9	30 ft.	Oct. 1978
10	30 ft.	Oct. 1978
11	32 ft.	Oct. 1978

Total length No. 1 and 2 berths 1,192 ft. (363 m.). Total length No. 3, 4, 5, and 6 berths 2362 ft. (720 m.).

Deep water berth No. 6 – 274 m. (900 ft.) No. 7 berth 220 m. (722 ft.).

Total length berths 8 and 9 – 360 m. (1,181 ft.). Berth 10 – 210 m. (689 ft.). Berth 11 – 195 m. (640 ft.).

Equipment Available: The Sharjah Container Terminal (SCT) which comprises berths 1 & 2 in the deep water harbour is equipped with Tango gantry cranes. These berths also are equipped with specialized equipment to handle containers in the storage area. Each berth is provided with fork lift trucks, trailers and yard hustlers to facilitate the movement of cargo. Pallets are available to assist cargo handling. Two heavy lift mobile cranes of forty and ninety-ton capacity are available on request from the Port Operator. Other equipment, including cranes, trailers, etc., will be made available upon request to the Port Operator with twenty-four hours notice.

Lighterage; Lighterage services are available.

Storage Facitlities: Storage facilities consists of six sheds (two of which are located in the Container Terminal area) having an area under roof of 28,000 sq. m. (300,000 sq. ft.). In addition, hard surfaced yards and Sharjah Container Terminal Stacking/Packing area provide extensive storage capacity.

Cold Store: A 3,000 ton capacity cold store (frozen and chilled) will be built on Berth 8, ready October 1978, with mechanical handling from ship's hold to store.

STEVEDORES: The port will operate on a twenty-four, seven-day week basis ashore and afloat. Additional charges will apply outside normal working hours which are defined as follows:

Saturday to Thursday except public holidays.
First shift 0600 to 1400 hrs.
Second shift 1400 to 2200 hrs.

Normal working hours are subject to change during Ramadan, when working hours will be at the discretion of the Port Operator. Requirements for port labour must be submitted by ship's Agent to the Port Operator by 1600 hrs. for work during the first shift on the following day and by 1100 hrs. on the same day for work during the second and third shifts.

MEDICAL: Upon application to ship's Agent, medical examination of Crew members can be arranged. Personnel will either be sent to private Doctor or to Public Health Department, as circumstances dictate. Serious cases will be referred to Government Hospital Doctor.

TANKERS: Tanker jetty situated in harbour on main breakwater. Draft alongside 30 ft. Limited bunkering facilities.

DENSITY: 1025/1028.

FUEL: Deliveries of fuel oil, gas oil or blends may be arranged through vessel's Agents. Marine lubricants will be delivered to ship's side. Both services require 48 hours notice.

FRESH WATER: Fresh water is obtainable at all berths.

REPAIRS: Good facilities for repairs.

DRY DOCKS: None.

SURVEYORS: Services are available upon request.

REPATRIATION: Proximity of the new Sharjah International Airport will permit efficient crew changes and repatriation. Off-shore crew changes facilities can be arranged.

Transit visas are not required for crew changes. Ships passengers require a valid visa for transit or temporary stay.

AIRPORT: Dubai and Sharjah.

TIME: GMT plus 4 hours. Permanent.

SHORE LEAVE: Shore leave is permitted for Crew members provided identification card or seaman's papers are deposited with Immigration office situated in the port and collected upon return.

GENERAL: *Pollution:* The provisions of the Sharjah Maritime Law shall apply with respect to the operation of vessels in Sharjah Coastal Waters. Garbage disposal services are provided by the Port Operator and are compulsory.

Ships Chandlers: Complete ship chandling facilities are available, handling provisions, laundry and bonded stores.

AUTHORITY: Sharjah Port Authority.

AGENT: Gulf Agency Co. (Sharjah) Ltd., POB 435, Sharjah, U.A.E. Cables: "Confidence" Sharjah, Tel.: 22163, 23503. Telex 68019 ("Confid SH"). Radio: Marine VHF radio, stand-by on Channel 16 (156.8 mHz). Call sign: "Confidence" Sharjah.

Air-freighted spare parts and ships' mail to Sharjah should be addressed to GAC Sharjah, but sent to Sharjah International Airport or Dubai Airport marked "Ship's Stores In Transit for M/S . . ." Certificates of Origin should follow the air waybill or in cases of emergency be sent to GAC Sharjah, soonest after shipment. Cable "Confidence" Sharjah, of flight details and Air Waybill number.

UMM AL QAIWAIN: 25.35 N. 55.35 E.

LOCATION: Approx. 20 miles North of Sharjah.

PILOTAGE: Service not available at the present time.

RESTRICTIONS: Depth of channel is presently 10 m., width 100 m., tidal range +0.2 m. – +1.7 m.

MAX. SIZE: Max. size of cargo vessel that could be taken into the port is estimated to be 17,000–18,000 d.w.t., draft however is the controlling factor.

BERTHING: There are at present 2 berths, length 200 m., depth alongside 10 m. There is one additional berth with a depth alongside at present 9.5 m.

There is a turning circle with a radius of 250 m., the channel and turning circle are presently marked by black buoys, however, these buoys are small and expected to be replaced in the very near future by larger buoys which will be visible at distances of up to 5 km. There is lighting on the main wharf, this will later be extended to the whole port area.

FRESH WATER: There are lines to the quay, however, the pressure is not sufficient to pump any quantity.

FUEL: Gas oil can be made available.

ZIRKHU ISLAND (Jazttzarakku Island): 24.53 N. 53.05 E.

CHART: B.A. Chart No. 2889.

LOCATION: The island is situated 70 nautical miles WNW of Abu Dhabi.

ANCHORAGE: There is an unprotected anchorage 2 miles off the East coast of the island with 17 m. depth available, where cargo can be discharged on to barges. Labour has to be provided from Abu Dhabi at present.

RESTRICTIONS: There is a lot of coral around the island but there is an opening at the South end of the island where beaching is possible.

BERTHING: There is a temporary "T" head jetty on the SW corner of the island which is expected to be ready shortly, the main "T" head is 150 m. from shore, length of the "T" end 60 m. and width 10 m. The road to the "T" head is 140 m. long and 6 m. wide. Depth 1.75 m. at chart datum.

There is a breakwater on the East coast of island under construction, length 1,200 m. The 150 m. long jetty at the end of the breakwater is expected to be ready by mid-1979. Width of the breakwater 25 m. and the depth at the jetty will be about 4.25 m. at chart datum.

DEVELOPMENTS: An airstrip (under construction) on SW part of the island expected to be ready about February, 1979. 3 tanker mooring buoys are being located 25 km. North of the island. Bunkering and deballasting facilities will be available.

OPERATORS: Zakum Development Company.

AGENT: See "Mina Zayed".

NOTES

Please also advise Shipping Guides Ltd.

United Kingdom

HEALTH—ALL PORTS:

PORT HEALTH (The Public Health (Ships) Regulations)

1. Simpler procedures for health clearance of ships arriving in the United Kingdom came into operation with effect from 1st April 1978.

2. Under these new rules the Master of a ship arriving from a foreign port must report to the port health authority†

(1) The occurrence on board during the voyage* of

(a) death, other than by accident,

(b) Illness where the person or persons concerned

(i) has or had a temperature of 38°C or greater which was accompanied by a rash, glandular swelling or jaundice, or persisting for more than 48 hours;

(ii) has or had diarrhoea severe enough to interfere with work or normal activities, or

(2) the presence on board of

(a) a person suffering from an infectious disease or who has symptoms which may indicate the presence of infectious disease

(b) any animal or captive bird of any species including rodents and poultry, or mortality or illness among such animals or birds.

(3) any other circumstances which are likely to cause the spread of infectious disease.

If there is nothing to report under any of these headings the Master has no need to obtain health clearance unless an authorised officer otherwise directs. A proportion of ships will be boarded and checked. If any of the conditions in (1)a (1)b and (2)a or (3) have occurred permission (free pratique) from an authorised officer will be necessary before disembarkation or commencing operation.

3. If the Master has something to report under 2 above he must—

(1) send a radio message not more than 12 hours and where practicable not less than 4 hours before arrival, giving the relevant information, to the port health authority†

or, if the ship is not equipped with a radio transmitter, notify the port health authority†, wherever practicable before arrival and otherwise immediately on arrival;

(2) show or give the appropriate day or night signal when the ship enters the jurisdiction of the port health authority† (the codes are set out below);

(3) Until "free pratique" for health purposes has been given see to it that no person, other than Pilot, Customs officers, Immigration officer or authorised officer boards or leaves the ship without the permission of the medical officer;

(4) complete a Maritime Declaration of Health and arrange for it to be handed to the authorised officer.

In relation to the presence or illness of animals on board etc., the requirements at (2), (3) and (4) do not apply but where plague has occurred or is suspected amongst rats or mice or there has been abnormal mortality among them, a Maritime Declaration of Health should be completed.

The requirement at 3(4) above does not apply to a ship which has come directly from a port in the expected area of the Council of Europe i.e., Belgium, France, Greece, the Irish Republic, Italy, Netherlands, Spain and the United Kingdom.

4. Where it is necessary to obtain "free pratique" for health purposes the Master should have already to hand the authorised officer, a list of passengers and crew leaving the ship together with the addresses they are going to in the United Kingdom.

5. An authorised officer may, in circumstances other than those set out above, direct that the Master shall complete a Maritime Declaration of Health and that the Master shall apply restrictions on boarding or leaving the ship.

6. The Master of a ship that has met another ship, which has proceeded from a foreign port, or has met an off-shore installation, is required to comply with the rules in paragraphs 2—3 (but if the ship has proceeded from an excepted port a Maritime Declaration of Health need not be completed).

7. If the port health authority† is satisfied that the Master of a ship was aware, or should have been aware, of conditions and failed to report them then action may be taken under the Public Health legislation which may result, on summary conviction, to a maximum fine of £100 plus £50 per day.

INTERNATIONAL CODE OF SIGNALS HEALTH CLEARANCE MESSAGES

ZS	My vessel is "healthy" and I request free pratique	Q
‡	I require health clearance	QQ
ZU	My Maritime Declaration of Health has a positive answer to question(s) (indicated by appropriate number(s))	
ZW	I require Port Medical Officer	
	ZW1 Port Medical Officer will be available at (time indicated)	
ZY	You have health clearance	
ZZ	You should proceed to anchorage for health clearance (at place indicated)	
	ZZ1 Where is the anchorage for health clearance?	
	I have a doctor on board	AL
	Have you a doctor?	AM

‡By night, a red light over a white light may be shown, where it can best be seen, by ships requiring health clearance. These lights should only be about 2 metres (6 feet) apart, should be exhibited within the precincts of a port, and should be visible all round the horizon as nearly as possible.

Health clearance may be given in three ways:—

a) Wholly in plain language

b) Partly in the above signal code; remainder in plain language

c) Wholly in the above signal code

Issued by the Health Departments of the United Kingdom.

†Or the local authority responsible for port health control.

*If more than 4 weeks have elapsed since the voyage began it will suffice to give particulars for the last 4 weeks.

ABERDEEN: 57.09 N. 02.03 W. (See Plan Book)

DOCUMENTS:

1 Maritime Declaration of Health.
1 Crew's Effects List.
2 Ship's Report by Master.
1 Home Office Form 1B6.
Stores List.
1 Certificate of Deck Cargo Tonnage.
1 Light Certificate.
1 Port Dues Certificate.
Ship's Certificate of Registry.
Mercantile Marine Office Certificate – for British ships only.
Load-line Certificate.
Safety Equipment Certificate.
Lloyds Certificate.
Derat Certificate.
Ship's Register.
Light Bills.
Safety Radio Certificate.

In addition, Manifests and Bills of Lading are usually sent to Agent direct from loading port.

PILOTAGE: Aberdeen has a compulsory pilotage district and there are 10 licensed Pilots. Boatage service, although not compulsory, is available. There are 8 licensed boatmen.

There is a navigation control service equipped with harbour surveillance radar which is operated by Navigation Control officers who operate on a 24-hour basis.

RESTRICTIONS: Navigation channel. max. designed width 110 ft., max. designed depth at HWOST 34 ft. Traffic signals regulate the movement of vessels in the Navigation Channel.

Entrance to Victoria Dock, depth at LAT 21 ft., clear width at entrance 140 ft.

MAX. SIZE: The port can normally accommodate a vessel of up to 525 ft. in length, 80 ft. in beam and drawing 30 ft. 6 in. of water, and at the various berths in tidal waters can handle expeditiously bulk containers and general cargoes. A vessel of length 545 ft. has been handled.

HEALTH: Foreign arrivals to complete Maritime Declaration of Health. They are cleared immediately on arrival by either a port doctor or an officer of H.M. Customs depending on where the ship comes from and whether there is sickness on board.

Vessels arriving from ports within accepted area (N. European ports) and coastal arrivals need not present Declaration in all cases; when there is sickness on board the Port Health Authority must be informed preferably not more than 12 hours and not less than 3 hours before arrival.

Also see "Health – All Ports" before first UK port.

RADIO: There is a VHF radio communications system which operates on Channels 6, 11, 12 and 16.

BERTHING: Tidal:

Tidal Harbour	length 3,461 ft.	Depth 26–34 ft. HWOST		
Albert Basin	,, 5,586 ft.	,, 25–29 ft.	,,	
River Dee (Navigable)	,, 1,884 ft.	,, 25–28 ft.	,,	
River Dee Dock	,, 1,398 ft.	,, 28–31 ft.	,,	
Upper Dock	,, 1,950 ft.	,, 18–30 ft.	,,	
Victoria Dock	,, 4,326 ft.	,, 22–28 ft.	,,	

Deep-water Berths:

No. 1 Atlantic Wharf. This is 480 ft. long with 30 ft. water at low tide and 42 ft. 9 in. at HWOST. Two-storey transit shed. Two 3-ton electric portal cranes. Excellent road and rail connection.

No. 2 Pacific Wharf. This is 525 ft. long with 32 ft. of water at low tide and 44 ft. 9 in. at HWOST. Open quay. 2 × 6 ton and 1 × 50 ton electric Portal cranes capable of handling heavy lifts and containers. Roll-on/Roll-off service operated by P&O to Shetland.

FRESH WATER: This service is provided by the Corporation of Aberdeen and is available at all quays.

REPAIRS: Ship-repairing facilities and shipping supplies are offered by a number of private firms and individuals with premises beside the harbour.

DRY DOCKS:

	Overall length (ft.)	*Breadth at entrance (ft.)*	*Depth on blocks (ft.)*	*Lifting capacity*
No. 1	180	29	16	700 tons
No. 4	180	38	18	1,000 tons

There are also 2 privately owned slipways and 1 drydock.

MEDICAL: Doctors and hospitals facilities available. Agents should be advised in advance of any medical attention required.

CUSTOMS ALLOWANCE: At the discretion of Local Customs Inspector. Normal allowances are equivalent to 8 oz. of tobacco per man and equivalent to 1 bottle of wine per man. Allowances may be halved for home trade vessels. Vessels in port for more than 3 or 4 days may receive extra allowances.

CONSULS:

Belgium	G. D. G. Mackinnon, 23 Market Street
Denmark	R. P. H. Pirie, 62 Marischal Street
Finland	D. G. R. Stroud, 62 Marischal Street
France	G. D. G. Mackinnon, 23 Market Street
Germany	A. H. S. Lewis, 186 Albert Quay
Iceland	Awaiting appointment
Netherlands	R. Clark, 3 Bedford Road
Norway	D. G. R. Stroud, 62 Marischal Street
Portugal	Awaiting appointment
Spain	D. G. R. Stroud, 62 Marischal Street
Sweden	R. P. H. Pirie, 62 Marischal Street

AIRPORT: International airport nearby at Dyce. There are frequent daily jet services to London operated by British Airways, and in addition British Airways also operate services to Edinburgh, Glasgow, Prestwick, Wick, Orkney and Shetland. There are also services to Manchester and Birmingham.

Air Anglia operate direct services from Aberdeen to Amsterdam, Bergen, Stavanger, Edinburgh, Jersey, Leeds/Bradford, Newcastle, Norwich, Isle of Man and Teesside.

TIME: BST is GMT plus 1 hour. GMT during Winter months.

HOLIDAYS: 1st and 2nd January; Spring Holiday (variable date); Summer Holiday (variable date); September Holiday (variable date); Christmas Day (25th December).

POLICE/AMBULANCE/FIRE: Dial 999 from any telephone and ask for service required.

TELEPHONES: There are berths at which GPO telephone service can be made available to vessels. All operational posts are linked by telephone network.

AUTHORITY: Aberdeen Harbour Board.

AMLWCH: 53.27 N. 04.20 W. (See Plan Book)

PILOTAGE: Compulsory. Pilot boards in the vicinity of the S.B.M.

ANCHORAGE: Good anchorage available 3-5 miles East of Point Lynas in 15-18 fathoms.

APPROACHES: Clear and unimpeded from East or West.

RESTRICTIONS: Berthing may be delayed because of strong tidal streams, particularly during period of Spring tides.

MAX. SIZE: No restriction on length, breadth or deadweight. Max. draft 92 ft. (28.04 m.).

HEALTH: See "Health – All Ports" before first UK port.

RADIO: Advise ETA 72 hours prior to arrival, and confirm again 24 hours before arrival.

VHF: Port operates on Channels 16, 10, 12, 19 and 46.

TUGS: No tugs. 2 mooring launches each 1,150 h.p. One is in attendance throughout discharge. Launches equipped with VHF Channels 16, 6, 9, 10, 12, 13, 14, 25 and 26.

BERTHING: *SBM Location:* Lat. 53° 26.7' N. Long. 4° 19.8' W. Standard mooring connections using terminal equipment twin 18 in. nylon grommet moorings with 3 in. chafing chains.

Water Depth: Approaches 32.80 m. Berth 31.15 m. (LLW). UKC: For 'B' Class 3.11 m.

Hose System: 2×24 in.×354 m. surface strings, terminating into 2×20 in. rail hoses with 150 ASA flanges.

Line System: 2×40 in.×1.8 miles (sub-marine); 2×40 in.×3 miles (shore booster pumps to tankfarm).

Max. discharge rate: 23,000 cu.m. per hour.

Position of Cargo Hose Connections: Amidships starboard-side.

DENSITY: 1025.

FRESH WATER: Not available.

FUEL: Not available.

BALLAST FACILITIES: None.

LIGHTERAGE FACILITIES: None.

SERVICES: Small quantities of fresh provisions only. No tank cleaning or dirty ballast facilities available.

REPAIRS: Small emergency repairs only.

GENERAL: Responsible Crew member on watch on fo'c'stle head throughout period on the mooring.

Whilst on the berth, no immobilisation of main engines or steering gear is permitted as ship's main engines must be continuously available on short notice to avoid contact with the SBM. Engines will normally be used astern to keep clear of the buoy at each slack water period.

Five shore personnel, namely 2 berthing supervisors and a support group of 3 men will remain on board while the ship is moored at the SBM.

The most stringent precautions must be taken to ensure no spillage of oil occurs.

OPERATORS: Shell Oil.

ARDROSSAN: 55.38 N. 04.49 W. (See Plan Book)

DOCUMENTS: Normal documents required:

Customs Documents.
Health Documents.
Crew List.
Passenger List.
Ship's Papers, etc.

PILOTAGE: Pilotage compulsory. Operated by Clyde Port Authority. Telegraphic address – "Harbour" Ardrossan. VHF Channels 16, 14 and 12. Signals for Pilot – flag, lamp or sound letter "G". Pilot taken on board approximately 0.75 miles S.W. of Breakwater Light.

24 hours notice required and amendment if ETA changes.

ANCHORAGE: 12 to 15 fathoms 1 mile S.W.

RESTRICTIONS: Two balls by day, or two red lights vertically by night, from a flagstaff at Montgomerie Pier, at elevations of 66 ft. and, 60 ft. indicate that vessels must not enter.

MAX. SIZE: Eglinton Dock approx. 420 ft. by 57 ft. by 16 ft./18 ft. (depending on tide). North Montgomerie Pier Tanker Berth – max. length 575 ft., max. draft, up to 70 ft. beam, 23 ft./26 ft.; over 70 ft. beam, 22 ft./25 ft.

HEALTH: All vessels requiring attention of Medical Officer shall show flag signal ZW by day, or between sunset and sunrise, either morse signal ZW by lamp, or a red light over a white light, not more than 6 ft. apart. Other vessels shall show flag signal "Q" by day, or between sunset and sunrise either morse signal Q by lamp or a red over a white light, not more than 6 ft. apart.

Certificate of Pratique will be issued by Customs Boarding Officer on receiving a satisfactory and fully completed Maritime Declaration of Health. No further formalities required at subsequent ports of call in the U.K.

Also see "Health – All Ports" before first U.K. port.

RADIO: VHF Channels 12, 14, and 16. Radio telephone per Portpatrick.

TUGS: As for Pilotage. (If second tug required orders to be given not later than 1600 hours and by 1530 hours on Friday for week-end work.) Tug's lines used – no additional charge.

BERTHING: No special requirements except with draft over 16 ft. when vessel may be delayed waiting for tide.

STEVEDORES: Orders to be given by 1130 hrs. previous day.

MEDICAL: No advance notice required unless medical attention is necessary immediately on vessel's arrival. No hospital facilities in Ardrossan, nearest hospital being at Irvine, 6 miles and Kilmarnock 16 miles.

TANKERS: Hoses 8in. Berths (1) Up to 3,000 d.w. (2) Up to approximately 20,000 d.w. Max. draft 22 ft./26 ft. depending on beam and tide.

DENSITY: Sea water 1025.

FRESH WATER: Available continually at all berths.

FUEL: Marine oils available ex pipeline, or by road tanker.

FIRE PRECAUTIONS: Patrolman required for hazardous cargoes.

DEVELOPMENTS: Roll-on/roll-off berth for specialised traffic.

GANGWAY/DECK WATCHMEN: Recommended.

OPENING/CLOSING HATCHES: Opened and closed by crew.

CERTIFICATES: Following Certificates are requested: Load Line, safety radio, safety equipment, safety construction, deratisation, and Current Trinity House Light Bills.

CUSTOMS ALLOWANCE: Standard U.K. allowances.

IDENTIFICATION CARDS: Not required.

CONSULS: Norwegian Vice Consulate, Danish Vice Consulate: R. L. Alpine & Co. Ltd., Winton Buildings, Ardrossan. Tel. Ardrossan 3065.

REPAIRS: Limited repair facilities.

REPATRIATION: Customs Boarding Officer acts for Immigration Dept. and arrangements for repatriation can be arranged in conjunction with ship's Agent.

AIRPORTS: Prestwick 18 miles. Glasgow 25 miles.

TIME: BST, that is GMT plus 1 hour. GMT in Winter months.

HOLIDAYS: 1st and 2nd January; Easter Monday; Third Monday in July; First Monday in October; and Christmas Day. Cargo work may be available on certain holidays by special arrangement.

POLICE/AMBULANCE/FIRE: Police tel. Saltcoats 63966; Ambulance, Fire: Ask telephone operator.

SHORE LEAVE: No restriction.

AUTHORITY: Ardrossan Harbour Company Limited.

AYR: 55.28 N. 04.38 W. (See Plan Book)
TROON: 55.33 N. 04.40 W.

DOCUMENTS: *Customs Require:*

2 copies Form XS1.
Ship's Register.
Load-line Certificate.
Safety Radio Certificate.
Passenger List.
Crew List.

Port Health require:

Derating Certificate.

Agents require:

1 copy Form XS4.
Bills of Lading.
2 copies Manifest.

PILOTAGE: 24 hours notice of ETA required for Pilot via Agent or Dock Authority. Pilots listen on Channel 16 and work on Channel 14 VHF.

ANCHORAGE: To Pilot's advice. E'ly winds Ayr Bay, W'ly gales anchor East side of Arran Island.

RESTRICTIONS: Draft restriction at LW. Enter on Pilot's advice.

MAX. SIZE: 300 ft. in length and 18 ft. draft – depending on berth.

HEALTH: See "Health – All Ports" before first U.K. port.

RADIO: Local station, call sign GPK on 2381 kc/s. VHF radio only, operating on Channel 14 and listening on Channel 16.

TUGS: No tugs available.

RADAR: No radar station.

BERTHING: *Ayr:* Length of operational quays 1,450, depth 21 ft. *Troon:* Length of operational quays 5,700 ft, depth 24 ft.

CRANES: Three heavy lift cranes, one 5 tonne portal crane. 4×5 tonne, 1×6 tonne mobile cranes.

BULK CARGO FACILITY: Three mobile conveyors, one fixed high capacity coal appliance.
STEVEDORES: 24 hours notice of ETA should be given to stevedores.
MEDICAL: Hospital facilities nearby in town.
DENSITY: Varies according to weather.
FRESH WATER: Available at all berths, rates upon application.
FUEL: All grades available, 24 hours notice.
GANGWAY/DECK WATCHMEN: Deck watchman required; may be supplied by arrangement with stevedores.
OPENING/CLOSING HATCHES: Performed by ship's crew.
CUSTOMS ALLOWANCE: 0.25 lb. of tobacco or equivalent cigarettes, and one-sixth of a gallon wine/spirits per man.
IDENTIFICATION CARDS: Seamen's identity cards should be carried.
REPAIRS: Most engine and deck repairs available.
DRY DOCKS: Two at Troon, max. length 400 ft., breadth 50 ft.
AIRPORT: Nearest at Prestwick, 7 miles away, mostly International flights.
TIME: GMT plus 1 hour, reverting to GMT in Winter months.
HOLIDAYS: Official holidays: First 2 working days in January: Easter Monday; Spring Bank Holiday (1978 – May 29th); Ayr Races (2 days in third week in September); Christmas Day. No work at all on these days.
POLICE/AMBULANCE/FIRE: Dial 999, and ask for service required.
TELEPHONES: No connection on board vessel.
SERVICES: Special arrangements can be made for tank washing and compass adjusting through Glasgow.
SHORE LEAVE: No restrictions on shore leave.
AUTHORITY: British Transport Docks Board.

BARROW-IN-FURNESS: 54.07 N. 03.14 W. (See Plan Book)

PORT LIMITS: The seaward boundaries of the port are a line joining Westfield Point (Lat. 54° 05′ 33″ N., Long. 03° 11′ 10″ W.) with Scar End Point on Walney Island (Lat. 54° 03′ 31″ N., Long. 3° 12′ 17″ W.).
DOCUMENTS:
2 Crew Lists.
2 Passenger Lists.
Health Declaration.
Ship's Certificates and Cargo Documents.
PILOTAGE: Pilot boards at Lune buoy, using Pilot cutter, usually 2 or 3 hours before high water.

The Heysham Lake Pilot vessel listens on 2182 kHz (MF) and is also equipped with VHF listening continuously on Channel 16. The working frequencies are 2241 and 2246 kHz and Channels 6, 12 and 14 respectively. Ships which are suitably equipped should pass their ETA through any United Kingdom Post Office Coast Station to their Agent 24 hours before arrival.
ANCHORAGE: At Lightning Knoll Buoy, depth of 10 m. at LW. In adverse weather conditions vessels proceed to Ramsey Bay, 16 km. away, for shelter. Piel Harbour to North of Piel buoy.
RESTRICTIONS: No docking after HW. Tidal range 6.4 m. – 9.76 m. Deduct 0.5 m. from height of high water to allow for invert at dock entrance. Access to the port, which is protected from the prevailing Westerly winds by Walney Island, is gained from the Irish Sea through the harbour along the well-defined Walney Channel. The depth of water on the Ramsden Dock entrance sill can range from 10.06 m. at high water springs to 6.4 m. at high water neaps.
MAX. SIZE: Length 183 m. Beam 23 m. Draft according to tide.
HEALTH: Vessels arriving from abroad are given pratique by Customs Boarding Officers. In case of suspected disease or fever on board notify Agent prior arrival. Agent will advise Port Health Authorities.

Also see "Health – All Ports" before first U.K. port.
RADIO: Local stations: Anglesey Radio, and/or Port Patrick Radio.
VHF: Port VHF service. Call sign 'Ramsden Radio'. Channel 16 (156.8 mHz) Calling and Safety. Channel 12 (156.6mHz) Port Operations.
TUGS: Liverpool tugs available on request. Notice required.
BERTHING:

Docks	Water area in Hectares	Width of entrance
Ramsden	24.8	30.48 m.
Buccleuch	12.6	30.48 m.
Devonshire	12.0	24.4 m.

Walney Channel Deep-water Berth: 259.10 m.×30.48 m.×10.06 m. depth.

Ramsden includes: Ramsden Dock Basin with three berths equipped for handling bulk cargoes with a total quayage of 378 m., taking vessels of up to 9.15 m. draft, and Anchor Line Basin with three berths 256 m., 152.4 m., and 274.3 m., long respectively, taking vessels of up to 7.3 m. draft. Anchor Line berth equipped for Ro/Ro traffic.
DENSITY: Salt water 1025.
FRESH WATER: Available from quayside hydrants.
FUEL: No stocks at Barrow. Can be supplied by road or coastal tanker.
GANGWAY/DECK WATCHMEN: Compulsory.
OPENING/CLOSING HATCHES: Handled by ship's crew.
IDENTIFICATION CARDS: Seaman's Book or Passsport required by non-British crew.
CONSULS: Netherlands, Norway, Portugal, Spain. Tel. Barrow 22323.
AIRPORT: Nearest at Manchester, 100 miles distant. Flights to all parts. Local Airport facilities by arrangement.
TIME: As for other UK ports.
HOLIDAYS: As for other ports in England, plus New Year's Day (1st January).
POLICE/AMBULANCE/FIRE: Police: Tel. Barrow 24532; Ambulance: Tel. Barrow 24201, 21035 and 21363; Fire: Tel. Barrow 21363.
SHORE LEAVE: No restrictions.
AUTHORITY: Docks Manager and Harbour Master.

BARRY: 51.24 N. 03.16 W. (See Plan Book)

DOCUMENTS: See "Cardiff".
PILOTAGE: Telegraphic address of pilot station: S.E.W.P.A. Pilots, Pier Head, Barry Docks. Amount of advance notice of ETA required: 24 hours. Final confirmation to be given by VHF or RT when within 2 hours of pilot station. VHF channel or frequency to be used when contacting pilot boat or pilot station: VHF Channel 16 thence working Channels 6, 8, 10, 11, 22.

Pilot boat: motor launch black hull with "S.E.W.P.A. Pilot" in white on same. Brown superstructure. Light or sound signals to be made by vessels requiring a Pilot: flag G over numeral 6 flown by day, or 6 sounded on whistle or siren; flashed by lamp at night.

Exact area where pilot boat is located normally between Nash Point and Breaksea L.V. Smaller vessels may be boarded in Barry Roads.
ANCHORAGE: Barry Roads, 10 fathoms, safe anchorage. Large vessels should anchor West of Breaksea L.V. Small vessels 0.75 mile S.E. of Barry Dock Entrance.
RESTRICTIONS: Entrance only 4 hours before HW to 4 hours after HW.
MAX. SIZE: 575 ft. × 75 ft. × 31 ft. draft.
HEALTH: See "Health – All Ports" before first U.K. port.
RADIO: Barry Docks Radio, Channel 22.
VHF: Channels 16, 10, 11 and 22.
TUGS: Join vessel at Barry Road. Tug's or ship's lines utilised.
BERTHING: The port is fully equipped to receive all types of oil chemicals, including LPG. Also modern facilities exist for handling all types of bulk as well as conventional cargoes. A roll-on/roll-off berth is available. Container traffic is not a feature of the port.
BRIDGES: Bridge swung to vessel's requirements.
STEVEDORES: An early ETA essential. Enables planning to be effected in conjunction with other work in port.
MEDICAL: Hospital facilities available. Advance notice desirable.
TANKERS: 6 tanker berths, maximum draft 28 ft.
DENSITY: Density 1020.
FRESH WATER: 15/20 t.p.h. per hose.
FUEL: By barge or road transport.
GANGWAY/DECK WATCHMEN: The services of watchmen provided at discretion of Shipowner or Agent.
OPENING/CLOSING HATCHES: Work normally undertaken by ship's crew but the port will, if requested, provide a crane to assist in this work on completion of a "Hatch beam form". Riggers may be employed on this work at request of shipowner.
CUSTOMS ALLOWANCE: 1.5 oz. tobacco per day per man. 0.185 litre wine or spirits per day per man.
IDENTIFICATION CARDS: Not needed by Port Authority.
CONSULS: None. Many located at Cardiff 8 miles East of Barry.
REPAIRS: All types of repair undertaken by private ship repairers.
DRY DOCKS: One 940 ft. × 78.5 ft.
REPATRIATION: All facilities available.
AIRPORT: Cardiff (Wales) Airport, 4 miles, served by regular airlines.
TIME: British Standard Time, GMT plus 1 hour. Reverting to GMT in Winter months.
HOLIDAYS: Bank Holidays. Arrangements made to work if essential.
POLICE/AMBULANCE/FIRE: Call operator by dialling 999.
TELEPHONES: At main berths.
AUTHORITY: British Transport Docks Board.

AGENT: Lambert Brothers Ship Agencies Ltd., The Exchange, Cardiff, CF1 6RX. Telex: 49384. Cables Lambert Cardiff. Telephone: 0222 25201.

BELFAST: 54.36 N. 05.56 W. (See Plan Book)

DOCUMENTS:
1 Passenger and Crew List for Immigration.
1 Crew Declaration C142 (for HM Customs).
1 List of Ship's Stores (for HM Customs).
1 Maritime Declaration of Health.
1 Cargo Manifest.
PILOTAGE: Pilot station is situated on end of East pier at Carrickfergus. It is manned continuously. Vessels requiring a pilot should give as much advance notice as possible of ETA, but in any case not less than 1 hour. Pilots may be ordered through:
(i) Pilot Station Carrickfergus, tel. Carrickfergus 2329.
(ii) Port Operations Station, tel. Belfast 34422 Ext. 330, or Belfast 59107.
(iii) Belfast Harbour Office, tel. Belfast 34422 Ext. 225, 0900-1700 hrs. Monday-Friday.

There are two motor launches servicing pilots. "Eleanor Laura" is 51 ft. 6 in. long and "Mabel Helen" is 46 ft 8 in. long. Both vessels are painted black with word Pilot in white letters on each side.

Pilot launches may be contacted on VHF Channel 16 and working frequency Channel 6.

Usual international signals should be made for a Pilot. Pilots board from 1.5 to 2 miles S.E. of Carrickfergus. In poor visibility the pilot launch makes a sound signal of 4 short blasts. Vessels may be led into calm water before boarding.

ANCHORAGES: Safe anchorages, according to draft and size of vessel are available through Belfast Lough East of a line from Carrickfergus to Grey Point.

RESTRICTIONS:

Intended depths in the entrance channels: Victoria Channel, sea to Refinery berths – 30 ft. below datum. Refinery to Thomson wharf – 26 ft. below datum.

Musgrave Channel, 21 ft. below datum.

Herdman Channel, 21 ft. below datum.

MAX. SIZE: Vessels' size is restricted only by depth of water available. See "Restrictions", "Berthing", and "Tankers".

HEALTH: Use International Code quarantine signals. Master of a ship approaching a port in Northern Ireland from a foreign port other than an excepted port must ascertain state of health of all persons on board, and must fill in and sign Declaration of Health. It should be completed and ready to deliver to the Customs Officer, or authorized officer of the Port Health Authority, whichever first boards the ship.

If any suspected diseases on board, free pratique will not be granted by Her Majesty's Customs until the ship has been visited by the Port Medical Officer. Therefore in these cases notify PORTELTH BELFAST by radio in advance.

Also see "Health – All Ports" before first U.K. port.

RADIO: The best station for messages, cables, etc., is Port Patrick call signal GPK.

VHF: Belfast Port Operation and Information service is situated at N.W. corner of East Twin dock. A continuous watch is maintained on VHF R/T on Channel 16. Working Channel is 12. Call sign is Belfast Harbour Radio.

TUGS: Tugs are owned by Cory Ship Towage Ltd., Tel. No. Belfast 743278. They are fitted with VHF Channels 16, 14, 12, 8 and 6. Tugs normally meet inward bound vessels in vicinity of number 20 beacon. Use of tugs' lines is optional. Charge for use of each tug line is £5.

BERTHING: The following berths are equipped for handling containers or drive-on, drive-off traffic:

Berth	*Max. draft (ft.)*
Donegall Quay 3 (1×25 tonne derrick crane)	14
Donegall Quay 4 (2×7.5 tonne portal crane)	14
Donegall Quay 5 (No cranes)	14
Donegall Quay 6 (No cranes)	14
Ballast Quay & Spencer Dock (2×25 tonne derrick cranes)	18
York Dock A (No cranes)	24
York Dock 1 (1×35 tonne derrick crane)	24
Herdman Channel West (2×30 tonne transporter cranes)	18
Gotto Wharf (2×30 tonne transporter cranes)	21
Stormont Wharf 2 (200 tonne cantilever crane)	28

Unitank Storage Co. Ltd. have constructed a bulk liquid terminal for the storage of petroleum, chemical products, etc. Special tankers ship liquid gas to the storage installation of Calor Kosangas (Northern Ireland) Ltd. at Musgrave Channel.

STEVEDORES: Two schooling times per day for stevedoring gangs – 0800 and 1300 hrs. Gangs for all week-end work are schooled at 1300 hrs. on Fridays.

MEDICAL: All kinds of medical treatment are available. Agent should be given as much notice as possible for arrangements to be made. International vaccination certificates for smallpox are required.

TANKERS: Tankers have to observe (i) Belfast Harbour Commissioners By-Laws for loading, discharging, etc., of petroleum spirit. (ii) Chamber of Shipping Tanker Safety Code.

Capacity for 6,000 tons of tank washings to be processed at B.P. Refinery.

Tanker berths: B.P. oil refinery 35 ft. No. 1 oil jetty 28 ft. No. 2 oil jetty 28 ft. 6in.

DENSITY: Average density of water in Inner Harbour is about 1012, and Outer Harbour is about 1024.

FRESH WATER: Available at almost all berths. Delivery is by hose at a rate of approx. 30 t.p.h. Arrangements can be made through Dept. of Environment (Water Services Division). Tel. 749402.

FUEL: All grades of fuel oil are available. 48 hours advance notice of requirements should be given.

FIRE PRECAUTIONS: Ships have to observe (i) Belfast Harbour Commissioners By-Laws for regulating the use of fires, lights and electrical apparatus. (ii) Chamber of Shipping Tanker Safety Code.

Special precautions for vessels carrying petroleum, explosives, calcium carbide and dangerous goods are set out in the appropriate by-laws. A copy of general port fire notice, delivered to all ships on arrival.

GANGWAY/DECK WATCHMEN: Normally, a member of ship's company acts as watchman. Shore watchmen may be obtained through Agent.

OPENING/CLOSING HATCHES: Conventional beams and hatches and slab hatches are opened and closed by stevedores. McGregor or patent steel hatches are worked by ship's personnel. Ship's personnel are required to work all types of hatches at grain silos.

CERTIFICATES:

Register. Radio Certificate. Load Line Certificate. Safety Equipment Certificate. Safety Construction Certificate. Light Bills. Passenger Certificate if applicable. Chain Register. Derat Certificate.

CUSTOMS ALLOWANCE: Tobacco: 8 oz. tobacco are permitted per man and issues are made at 8 day intervals. Wine and/or Spirits: Wine, beer and spirit issues are made, in moderation, at 4 day intervals.

IDENTIFICATION CARDS: Seamen's identity cards required.

CONSULS:

Belgium	Hillsborough 682671
Denmark	Belfast 30581
Dominican Republic	Belfast 31265
France	Belfast 660325
Germany	Ballymena 41412
Italy	Belfast 778353
Netherlands	Belfast 43126
Norway	Belfast 24909
Spain	Belfast 27571
Sweden	Belfast 29281
Switzerland	Belfast 669651
Turkey	Belfast 25865
U.S.A.	Belfast 28239

REPAIRS: All types of deck and engine repairs are possible.

DRY DOCKS: East Twin dry dock, length of floor 1,100 ft. breadth of floor 167 ft., breadth of entrance 165 ft., level of sill 26 ft. 6 in. below datum.

Harland and Wolff building dock, length of floor 1,825 ft., breadth of floor and entrance 305 ft., level of sill 16 ft. 10 in. below datum.

Five other dry docks available.

REPATRIATIONS: Crew may be changed and repatriations arranged. Immigration must be informed.

AIRPORT: Aldergrove Airport is approximately 17 miles from Belfast. There are daily flights to all parts of United Kingdom.

TIME: British Standard Time is kept, that is GMT plus 1 hour. Reverting to GMT in Winter months.

HOLIDAYS: Stevedore holidays are 1st January, 17th March, Easter Monday and Easter Tuesday, 12th and 13th July and 25th and 26th December.

POLICE/AMBULANCE/FIRE: All can be contacted by phoning 999 and ask for services required. Additionally: Fire Brigade Belfast 22222; Ambulance Belfast 41212; Harbour Police Belfast 23555; *or* through Belfast Harbour Radio on VHF/RT Channels 16 and 12.

TELEPHONE: Telephone can be placed on board at certain berths.

SERVICES: All principal makes of radio, radar and gyro equipment can be serviced. Compass adjusting and D/F calibration can be carried out.

SHORE LEAVE: Normally no restrictions on shore leave.

AUTHORITY: Belfast Harbour Commissioners.

BLYTH: 55.08 N. 01.30 W. (See Plan Book)

DOCUMENTS:

Certificate of Registry.

Load Line Certificate.

Wireless Telegraphy and/or Safety Radio Certificate.

Safety Equipment.

Ship Construction.

Light Dues Payments.

Bills of Lading, Manifest and Stowage Plan usually sent in advance of vessel.

List of members of crew (of ship arriving in U.K.) who are aliens or were engaged outside U.K. (Home Office Form I.B.6A).

Passenger form to be completed when reporting vessel's arrival from foreign ports.

PILOTAGE: Call by R/T when within 50 miles of port, and VHF when approx. 1 hour off port. Pilot boats black hull with words "Pilot" on Hull or Superstructure. Letters in white. Fly international Pilot Flag at masthead and at night show international light signals for pilot boat on station.

Vessel requiring Pilot sounds 2 short and 3 long blasts or exhibits International Code Flag "G". By night flashes International Code Signal "G" or "PT". Pilot boats operate and will board within radius of 2 miles of East Pier Lighthouse, or further weather permitting. Pilots board at Pier end area during adverse weather.

ANCHORAGES: No anchorages within harbour – in good weather vessels can anchor off port East of Fairway Buoy.

RESTRICTIONS: No night restrictions. Entry according to draft. Channel dredged to 7.7 m. LAT and approaches 8.6 m. LAT. Upper River and South Harbour 6.8 m. LAT. Rise of tide 4.3 m. springs, 2.1 m. neaps.

MAX. SIZE: Bulk carriers up to 22,500 d.w.t. discharge at Alcan (U.K.) Limited Terminal. Max. draft 9.8 m.

For other berths max. length 190.5 m., draft 8.5 m.

HEALTH: International quarantine signals to be used. Pratique will be granted by Customs or Port Health officer if Maritime Health Declaration is clean. If suspected diseases on board radio "PORTELTH BLYTH" in advance advising details.

Also see "Health – All Ports" before first U.K. port.

RADIO: Cullercoats Radio.

VHF: Details of movements within port given over VHF from port control office. Calling Channel 16, working Channel 12.

TUGS: Normally join vessel at harbour entrance. Extra charge for use of tugs lines.

BERTHING: Alcan Bulk Alumina Terminal, depth alongside 10.4 m. LAT.

North Quay, South Harbour, depth alongside 8.5 m. LAT. Coal-loading berths and waiting berths, 5.2 m. to 8.6 m. LAT. West Quay, dredged depth 5.2 m. LAT. South Side Berths, dredged depth 8.6 m. LAT. Wimbourne Quay dredged depth 6.8 m. LAT.

STEVEDORES: Blyth Harbour Commission, Traffic Department. South Harbour, Blyth. Tel. Blyth 3611/2. ETA requested day before arrival.

MEDICAL: Notice not necessary but advisable. Hospital facilities available. Inoculation, vaccinations and/or certificates not specifically required.

DENSITY: Sea water. Fresh water effect negligible.

FRESH WATER: Obtainable from shore hydrants. Rate of delivery approximately 20 t.p.h.

FUEL: BHC operate a bunkering Agency on behalf of Shell UK Ltd. 24 hours notice usually required. Grades gas oil and marine diesel.

GANGWAY/DECK WATCHMEN: Not usually employed as these duties are carried out by the crews.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CUSTOMS ALLOWANCE: Tobacco: 50/250 grammes. Wine/Spirit: Wine up to 0.75 litres. Spirits up to 0.375 litres.

IDENTIFICATION CARDS: Seaman's Book or Passport desirable.

CONSULS: Denmark, Norway, Netherlands.

REPAIRS: All types of deck and engine repairs possible.

DRY DOCKS: 3 dry docks available No. 3–L 467 ft. 10 in. × B 60 ft. 9 in., No. 2–L 338 ft. 9 in. × B 44 ft. 10 in. No. 1–L 311 ft. × B 46 ft.

REPATRIATION: Can be arranged by H.M. Immigration Office, Blyth.

AIRPORT: 24 km. Served by regular airlines.

TIME: BST is GMT plus 1 hour. GMT in Winter months.

HOLIDAYS: Christmas Day; New Year's Day; Good Friday; Easter Monday; Spring Bank Holiday and Late Summer Holiday. Cargo work can be arranged on these days by request.

POLICE/AMBULANCE/FIRE: Tel. 999.

TELEPHONES: Can be fixed aboard by arrangement.

AUTHORITY: Blyth Harbour Commission.

BRIDLINGTON: 54.05 N. 00.12 W.

DOCUMENTS:

Crew List.
Passengers List.
Ship's Register.
Customs Documents.
Manifests.
Bills of Lading.
Ship's papers.

PILOTAGE: Vessels approach within 0.25 mile, flying G Flag. Local fishermen act as Pilots and board approx. 1 hour prior to berthing time.

ANCHORAGES: For small vessels of not more than 12 ft. draft, 1 mile S.E. of harbour. Deeper-drafted vessels 3 miles East of Harbour. Good holding grounds except in heavy weather from East to South.

RESTRICTIONS: In accordance with state of tide and draft restrictions.

MAX. SIZE: Max. permissible length 149 ft. Draft 13 ft. on spring tides.

HEALTH: Pratique required from all vessels other than from a British port. "Q" Flag to be flown.

Also see "Health – All Ports" before first U.K. port.

RADIO: Humber Radio Station is the best for a vessel to route ETA, etc.

TUGS: None available.

MEDICAL: Agents require advance notice of required medical attention. Hospital facilities available. Relevant medical information, i.e. fever, etc., required.

DENSITY: Sea water.

FRESH WATER: Unlimited quantity available. Delivery from shore pipe-line at the rate of 10 t.p.h.

FUEL: All grades available. Delivery by road tankers.

OPENING/CLOSING HATCHES: Normally carried out by crew.

IDENTIFICATION CARDS: Not required.

CONSULS: No local Consuls. Nearest port of availability, Hull, Yorks.

REPAIRS: Limited engine and deck repairs.

REPATRIATION: No facilities exist for crew change.

AIRPORT: Yeadon, 45 miles, served by regular airlines.

HOLIDAYS: Normal Bank Holidays. Cargo can be worked on these days.

POLICE/AMBULANCE/FIRE: Police Bridlington 72222; Ambulance 0482–881198; Fire 73585.

TELEPHONES: No arrangements exist for placing telephones aboard.

SHORE LEAVE: Crew members allowed ashore.

AUTHORITY: Bridlington Harbour Master: Harbour Commissioners.

BRISTOL: 51.27 N. 02.35 W. (See Plan Book)

DOCUMENTS:

1 Maritime Declaration of Health.
1 Crew's Effects List.
2 Ship's Report by Master.
Home Office form I.B.6.
1 Stores List.
1 Certificate of Deck Cargo tonnage.
1 Grain Certificate.
1 Light Certificate.
Port Dues Certificate.
1 Passenger List.
Landing Card for each passenger.
Ship's Certificate of Registry.
Mercantile Marine Office Certificate (British ships only).

In addition, Manifests and Bills of Lading are usually sent to Agent direct from loading port.

PILOTAGE: Telegraphic address, Brispilot Avonmouth. Notice required, not less than 12 hours (preferably more) before arrival Breaksea Lighthouse buoy. VHF Channel, calling 16, working 6. A 58 ft. motor pilot boat, black hull, "Bristol Pilot" in large white letters amidships.

Position: Principle pilotage station. Breaksea station at Breaksea extends from a line drawn 180° from Sully Island. Weather and other circumstances permitting the motor pilot boat operates from Barry Harbour to board vessels expected to dock at Bristol.

Pilot boats in Bristol Channel have adopted distinctive pilot signals, made audibly during foggy weather when the fog signal for a vessel is heard, and by morse lamp at night in clear weather. The distinctive signal for Bristol pilots is the International Morse Code Number 2, viz ··---Vessels desiring to embark or disembark a pilot are invited to adopt a similar procedure.

ANCHORAGES: Barry Road affords good anchorage in moderate weather for vessels awaiting a Pilot. Walton Bay affords good anchorage within 6 miles of Avonmouth.

RESTRICTIONS: Avonmouth Docks. No restrictions at night. Sill clearance of 4 ft. for all vessels with a maximum draft of 34 ft. 6 in. salt water. There are restrictions on draft during neap tides to possible 28 ft. Range of high water – 33 ft. to 48 ft.

Portishead Docks. Sill clearance of 5 ft. for vessels up to 55 ft. beam. Sill clearance of 6 ft. for vessels up to 60 ft. beam.

MAX. SIZE: Avonmouth Docks. Max. length 690 ft., beam 95 ft., draft 34 ft. 6 in. salt water.

Royal Portbury: Max. length 950ft. Max. beam 130 ft. Max. draft 40 ft.

Portishead Docks. Max. length 415 ft., beam 60 ft., draft 26 ft. (normal tides).

HEALTH: Foreign arrivals are required to complete Maritime Declaration of Health and to report to Port Health Authority by radio, sickness, prior to arrival if possible, otherwise report on arrival at dock entrance.

Health clearance by Port Medical Officer must be obtained.

Foreign arrivals which have had no sickness aboard do not need to submit Maritime Declaration of Health or to obtain Health Clearance.

Onus of reporting sickness is the personal responsibility of the Master.

All vessels are required to report the presence of animals or birds aboard vessel and any disease amongst such animals or birds.

Vessels arriving from ports within the excepted area and coastal arrivals need not present Declaration, but when there is sickness on board Port Health Authority must be informed.

Also see "Health – All Ports" before first U.K. port.

RADIO: Niton Radio, Lands End Radio, Portishead Radio.

RADAR/VHF: No port radar service, but an extensive VHF coverage exists from West of Barry Roads, to all dock entrances.

TUGS: Vessels docking on flood tide normally meet tugs at old oil jetty to Northward of the entrance lock. Vessels docking on ebb tide, tugs join between Firefly and Cockburn Buoys. Ship's line always used.

Ships for Royal Portbury Docks are normally met by tugs West of Portishead Point.

BRIDGES: Avonmouth Docks. Junction between Avonmouth Dock and Royal Edward available at all times if necessary by arrangement with Dock Master.

STEVEDORES: At least 24 hours notice required in order that necessary labour may be allocated.

MEDICAL: Absolutely necessary for Agent to have as much notice as possible of any medical attention required. All facilities available.

DENSITY: Avonmouth Docks: Average density 1012 to 1015; in the river fluctuates according to tides. Portishead Docks: The density is 1015.

FRESH WATER: Avonmouth and Portishead Docks: available at all berths, 24 hours a day from hoses connected to standpipe. Delivery rate 25–30 t.p.h.

FUEL: Most grades available – 24 hours notice required.

FIRE PRECAUTIONS: According to local laws, available on request.

DEVELOPMENTS: *Royal Portbury Dock:* The Port of Bristol's new Royal Portbury Dock received its first commercial vessel on April 12th, 1978. The 1,000-acre site is being developed to provide space for modern cargo handling methods with provision for Roll-on/Roll-off cargoes.

Situated on the South bank of the River Avon opposite Avonmouth Docks, with a depth of water of 45 ft., Royal Portbury Dock is already handling unitised cargoes on the common user quays whilst other berths await development.

At the Oil Basin, a bulk liquid storage installation for petroleum, molasses and chemicals has been constructed. Major development schemes now operational include reconstructed and modernised grain discharging berths at the Royal Edward Dock.

GANGWAY/DECK WATCHMEN: Not absolutely necessary – Available if required.

OPENING/CLOSING HATCHES: If crew open hatches on the first day then they must continue to do so whilst vessel is discharging/loading, otherwise dockers attend to this.

CERTIFICATES:
- Load Line Certificate.
- Safety Equipment Certificate.
- Lloyd's Construction Certificate.
- Derat Certificate.
- Ship's Register.
- Light Bills.
- Safety Radio Certificate.

CUSTOMS ALLOWANCE: Customs allowance for crew members of British and foreign ships in British waters at present are:

Tobacco: (incl. cigars and cigarettes) – 30 grammes (1 oz.)

Spirits: (incl. liqueurs, perfume and toilet water) – 0.185 litre (0.75 of a bottle) of which not more than half may be perfume

Wine: 1.5 litres (2 bottles)

IDENTIFICATION CARDS: Not necessary unless being repatriated.

CONSULS:
- Belgian Consul
- Chilean Consul
- Danish Consul
- French Consular Agent
- Finnish Vice Consul
- German Consul
- Greek Consul
- Icelandic Consul
- Italian Consular Agent
- Netherlands Vice Consul
- Norwegian Vice Consul
- Portuguese Vice Consul
- Spanish Vice Consul
- Swedish Vice Consul

REPAIRS: All types of repairs are carried out.

DRY DOCK:

	Total length	*Length over blocks*	*Width of Entrance*	*Depth of water on sill*
Avonmouth Docks	875 ft.	850 ft.	100 ft.	32 ft.

REPATRIATION: Repatriation can be effected to all parts of world.

AIRPORT: Local airport approximately 12 miles away. London can be reached in 1.5 hours by train.

TIME: BST is GMT plus 1 hour. GMT in Winter months.

HOLIDAYS: New Year's Day; Easter (varies); May Day; Spring Bank Holiday (last Monday in May): Summer Bank Holiday (varies, usually last Monday in August); Christmas Day (25th December); Boxing Day (26th December). Work can be arranged on these holidays, although unusual to work 25th/26th December.

POLICE/AMBULANCE/FIRE: Avonmouth Docks. Can be contacted by telephoning Avonmouth 2591.

Portishead Docks. Emergency services obtained by dialling 999 at public call boxes.

TELEPHONES: Can be put on board at most berths.

AUTHORITY: Port of Bristol Authority.

AGENT: Hodder, Whitwell Ltd., Gloucester Road, Avonmouth, Bristol, BS11 9BH. Cables: "James Avonmouth". Tel. Bristol 823671. After Office hours: Bristol 822855. Telex: 44718.

BRIXHAM: 50.24 N. 03.30 W.

PORT LIMITS: The area below the level of high water enclosed by:—

(a) An imaginary line drawn from Shoalstone Point in the Parish of Brixham, extending in a west/north/westerly direction for a distance of 6,500 ft. or thereabouts, until it intersects the imaginary line next described:—

(b) An imaginary line drawn from the centre of the Old Quarry at O.S. Ref. SX91445723, in a north-easterly direction for a distance of 3,000 ft., or thereabouts, until it intersects the imaginary line first described, and:—

(c) The land line of the coast from the centre of Old Quarry aforesaid to the said Shoalstone Point.

DOCUMENTS:
- 1 Crew List,
- 1 Passenger List,
- 2 General Declarations (Customs),
- 1 Health document,
- 1 Manifest,
- 1 Each bill of Lading,
- 1 Ships papers,
- 1 Ships Certificate,

or

as for other Small U.K. Ports.

PILOTAGE: Trinity House Pilot, tel. Brixham 2214.

DEEP SEA AND COASTAL PILOTAGE: Pilots for Channel, North Sea, British Coast and Baltic. 48 hours before arrival radio "HUTCHINSON GRAVESEND" stating ETA off Brixham and port(s) of destination. On approaching Brixham contact Brixham Pilots on VHF Channel 16 and 9. Pilots board by motor-launch 1 mile N.E. off Berry Head. Pilot boats, length 40 ft. flying "G" flag and flashing "H". Pilots can also board at any British or Continental port as required.

Also see "London" — Pilotage.

ANCHORAGES: In Torbay. Middle of Bay on line Brixham (Victoria) Breakwater and entrance to Torquay Harbour. 6 fathoms chart datum.

MAX. SIZE: Depending on draft (36 ft. to 50 ft.).

HEALTH: See "Health – All Ports" before first U.K. port.

VHF: Berry Head Coastguard station, Harbour Office and Torbay and Brixham Shipping Agents on VHF Channel 16.

TUGS: None.

BERTHING: Small coastal vessels in Inner Harbour by arrangement with Harbour Master. Vessels up to 500 ft. (draft 26 ft.), at Jetty, on Brixham breakwater by arrangement with Brixham Bunkering and Devon Marine Ltd., (Telephone Brixham 2250), or with Harbour Master, Brixham.

MEDICAL Contact Brixham and Torbay Shipping Agents.

DENSITY: Salt water. 1025.

FRESH WATER/FUEL: Available from Brixham Bunkering and Devon Marine Jetty on Breakwater.

REPAIRS: Engine welding, plumbing by local firms.

SURVEYORS: Lloyds Agent – Mr. J. S. Churchill, 25 Fore Street, Brixham, telephone 2171.

REPATRICATION: No facilities.

AIRPORT: Exeter, 35 miles away.

POLICE/AMBULANCE/FIRE: Brixham 2231 or 3065 or 999.

SERVICES: No tank cleaning. Compass adjusting with arrangement with Harbour Master. (Tel: Brixham 3321.)

SHORE LEAVE: Allowed.

AUTHORITY: Harbour's Administrator, Torbay Borough Council, and Harbour Master.

BUDE: 50.50 N. 04.33 W.

GENERAL: Port little used by commercial shipping.

DOCUMENTS/HEALTH/CONSULS: Port not equipped to accept vessels from abroad.

PILOTAGE: Not normally available (special arrangements may be made).

ANCHORAGES: Outer Harbour dries out at half tide. Inner Harbour (Canal) 8ft. draft maximum.

MAX. SIZE: Inner Harbour (Entry via Lock) length 90 ft. Beam 25 ft. Draft 8 ft.

RADIO: MF Ilfracombe Radio. VHF Severn & Celtic.

FRESH WATER: Available via 0.5 in. hose pipe.

TELEPHONE NUMBERS: Harbour Master Bude 3111 (Office), Bude 3531 (Home), Coastguard Harland 235, Police Bude 2131.

SPECIAL REGULATIONS: Entry to the Harbour is made by leaving Chapel Rock (linked to the Main Land by a Breakwater) to starboard. Head towards the Lock in the Channel marked by 2 pairs of Leading Beacons.

The outer pair of Beacons, bearing 075° 30' (T) consist of a front mark – white Spar with Yellow Diamond Topmark, rear mark – white flag staff, both on cliff top on North side of Harbour.

The inner pair of Beacons, bearing 131° 30' (T) consist of a front beacon – white Pile Beacon with Yellow Triangle Topmark, rear beacon – white spar with Yellow Triangle Topmark, placed 0.5 cable West of Lock Entrance.

The approach to Bude, either from the North or South, should be made from a S.W. direct direction in line with the first pair of Leading Marks.

Immediately on passing Barrel Rock (0.5 cable North of Chapel Rock and marked by a Beacon Barrel) turn to starboard and pick up the inner pair of Leading Marks from which the Lock is clearly visible.

Entry to the Harbour at night not recommended.

Heavy ground swell and breaking seas may prohibit entry and exit.

The Harbour dries out at each Tide and entry of vessels is normally restricted to 2 hours either side of High Water.

For Locking, 18 ft. minimum of water above Chart Datum is required to Lock. A heavy swell may also prohibit the operation of the Lock.

Prior notification of arrival should be made to the Harbour Master if possible.

AUTHORITY: North Cornwall District Council.

CALEDONIAN CANAL: 57.27 N. 04.18 W.

PORT LIMITS: Craft are considered to be within the Canal when they have entered the sea lock structures.

DOCUMENTS: Masters of craft on through passage must report to the Sea Lock Office at Corpach with the ship's measurement certificates to enable toll declaration to be made. Masters of craft on partial passage starting and returning to the East coast should report to the Clachnaharry Canal Office.

PILOTAGE: Approach pilotage compulsory at Inverness end. Contact Inverness Pilots by Link Call through Kessock 217 (Ships of NRT under 100 tons are exempted). Pilotage within the Canal and West approaches optional. For Pilotage into Corpach from the West contact Mr. H. McKinnon at Corpach by Link Call to Corpach 304 and for Canal Pilotage, by Link Call to Caledonian Canal Office, Inverness 33140.

RESTRICTIONS: Entrances to sea locks restricted for 2 hours either side of low water Springs. There is generally no restriction at low water Neaps. The Canal is operated on normal manning from 0800 until 1700 hrs. (Sundays excepted).

MAX. SIZE: 48.770 m. (160 ft.) length overall × 10.670 m. (35 ft.) beam × 2.740 m. (9 ft.) draft fresh water or, alternatively, 45.720 m. (150 ft.) × 10.670 m. (35 ft.) × 4.110 m. (13 ft. 6 ins.) draft fresh water.

Corpach sea lock will admit craft to the Corpach Basin only of size 61.870 m. (203 ft.) length overall × 10.670 m. (35 ft.) beam × 4.110 m. (13 ft. 6 ins.) draft fresh water.

All dimensions are overall and *NOT* moulded.

HEALTH: Craft from foreign ports will be boarded by the Customs/Immigration/Health at the sea locks and they should fly the appropriate international flags on approach.

Also see "Health – All Ports" before first U.K. port.

RADIO: Western approaches via Oban radio. Eastern approaches via Wick or Stonehaven.

VHF: None.

RADAR: None.

TUGS: A Canal tug is available if required. Service should not be required on normal passage.

BERTHING: At Corpach Old and New Wharves (limited Customs approval). At Inverness Glenmhor and Glen Albyn Wharves below Muirton and Upper Muirton Wharf at the top of Muirton. Water depth available for craft having 4.110 m. (13 ft. 6 in.). Normally ships gear or road mobile cranes used. Corpach New Wharf equipped with 2 × 7-ton Derrick Cranes owned and operated by Scottish Pulp and Paper Mills.

BRIDGES: Road and rail swing bridges are operated to permit the passage of craft. Headroom restricted to 36.576 m. (120 ft.) by overhead electric cables near Inverness.

STEVEDORES: Traffic to Scottish Pulp and Paper Mills at Corpach unloaded by Pulp Mill gangs. Elsewhere arranged through Shipping Agent.

MEDICAL: Normal General Practioners service available at main centres along the Canal. Full Hospital facilities at Inverness.

FRESH WATER: Fire hose supply available at Glen Albyn Wharf, Inverness. Small domestic supplies available at the main lock flights. Hydrant supply at 30 p. per 100 gallons.

FUEL: Available by road tanker from principal oil companies by telephoning Shell, Inverness 38850 or Fort William 2404; Esso, Inverness 37222 or Fort William 2903.

REPAIRS & DRY DOCK: Limited repairing facilities at the Thornbush Slipway and Engineering Company Limited, Inverness.

AIRPORT: Highlands and Islands domestic flights from Inverness (Dalcross).

POLICE/FIRE/AMBULANCE: Emergency calls to these services on 999.

DEVELOPMENTS: Likely future headroom restriction to approximately 28.960 m. (95 ft.) over H.W. Springs in about 1980 upon construction of the new Kessock Bridge at Inverness.

GENERAL: The Caledonian Canal is part of the Customs Port of Inverness.

AUTHORITY: British Waterways Board. Caledonian Canal Office, Clachnaharry, Inverness.

CAMPBELTOWN: 55.26 N. 05.36 W. (See Plan Book)

DOCUMENTS: 2 Crew Lists; 2 Passenger Lists; 1 Store List; 1 Personal Effect List; Ship's Register; 1 Manifest or Bill of Lading.

PILOTAGE: Although *not* in Clyde Port Authority area, where large vessels are concerned, it is advisable to have the services of a qualified Clyde River Pilot or where applicable a Certificated Naval Pilot. As neither are based in Campbeltown, it is essential that at least 24 hours notice be given to Agent, when required.

ANCHORAGE: For large vessels in 6 to 10 fathoms in the area between the Orange leading lights and the Methe bank buoy, for smaller vessels a wider area can be used but south side of loch best holding.

HEALTH: Normal UK Port requirements. In event of disease or fever prior notice should be given to Agent.

Also see "Health – All Ports" before first UK port.

RADIO: All messages through normal coastal stations or by radio telephones via Portpatrick Radio when nearer port. Cables should be addressed to Agents as "Coal, Campbeltown".

RADAR/VHF: No port radar service. Direct contact with Harbourmaster and Agent still under consideration. P.O.L. Depot, Campbeltown can be called on 30 – 40 mile radius on Channels 6, 12, 18. Same channels for tugs, lying off port, when arranged previously.

TUGS: Must be ordered at least 24 hours beforehand as they come from Glasgow area further north on River Clyde. Precise requirements concerning arrival/departure times requested owing to heavy costs entailed for waiting time.

BULK CARGO FACILITIES: Berth for vessel up to 230 ft. in length with maximum permissable draft 12 ft. (Salt water). Discharge by shore crane, Maximum lifting 5 tons.

SPECIALISED CARGO-HANDLING FACILITIES: One berth for roll-on/roll-off ferry inside harbour, max. draft of vessel 8 ft., general cargo discharged.

STEVEDORES: Agents arrange all cargo discharges through another dept. of D. McNair & Son, including mechanical handling. Portable cranes only available. Ship's gear used when available to minimise costs.

MEDICAL: One casualty hospital available. Serious casualties transferred to Glasgow either by Air or road, according to condition. Four local doctors.

TANKERS: All intended arrivals should be notified to Officer-in-Charge, P.O.L. Depot, Campbeltown (Tel. No. 0586/2226) at earliest.

P.O.L. Jetty, minimum depth, 40 ft. One discharging berth available.

FRESH WATER: Available at all times, delivery by hose, cost per ton 10p.

FUEL: Marine Gas Oil supplied on commercial quay. Naval requirements by arrangement with P.O.L. depot.

REPAIRS: Minimal repairs only. Notify Agent as early as possible.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: Ship's option.

CARGO GEAR: See "Stevedores". Ship's gear preferred where possible.

REPATRIATION: Air service available once daily in forenoon, except Sunday.

AIRPORT: Machrihanish – 3 miles distant.

TIME: G.M.T.

HOLIDAYS: New Years Day (1st January) Christmas Day & Boxing Day, 3 Statutory Local Holidays, Annual Holidays 1st fortnight August.

Work can be carried out by arrangement with Stevedores.

POLICE/AMBULANCE/FIRE: Dial 999.

TELEPHONES: By arrangement.

SERVICES: Laundry/Dry Cleaner, Minimal Radar/Radio, VHF Repairs. No tank-cleaning equipment available or compass adjusting.

SHORE LEAVE: After clearing inwards, crew members are allowed to go ashore without special permission.

IDENTIFICATION CARDS: Not required. P.O.L. Depot request production of Seamen's Cards.

GENERAL: Basin of the Clyde Lat. 55° 25′ 30″ N., Long. 5° 35′ 30″ W.

Tides: Spring rise 8.9 ft; Neap rise 7.5 ft.; depth at sea entrance, 12 ft. low water spring tide; there is a rise of 8 ft. in spring tide in harbour.

DEVELOPMENTS: The outer end of the old quay will be reconstructed during 1979/80.

AUTHORITY: Commercial, Harbour & Loch Area – Strathclyde Regional Authority, c/o Harbourmaster, Campbeltown.

P.O.L. Depot, Campbeltown. Officer-in-Charge, Kilkerran Road, Campbeltown.

AGENT: McNair & Son, Kinloch Road and 27a Longrow, Campbeltown. PA28 6EG Tel. Nos. 0586/2020 or 2039. Cables – "Coal, Campbeltown". after hours – 2039 – Mr. Shaw.

CARDIFF: 51.29 N. 03.10 W. (See Plan Book)

PORT LIMITS: A vessel is considered as "arrived" when it is in the lock.

DOCUMENTS:

1 Crew List.

1 Health Form.

1 Port Immigration, i.e. Crew List, and where applicable, a passenger list.

Pratique issued by Customs.

1 List of Consumable Stores (tobacco, snuff, alcohol, etc.).

3 Bills of Lading (one original and two copies).

PILOTAGE: Channel pilotage and dock pilotage not compulsory except for vessels carrying passengers. Pilots embark from pilot cutters operating from Barry Harbour.

Pilot Cutters are marked on each side "Pilots" and operate radio continuous watch on VHF. Signal for pilot cutter – numeral 7 on whistle or siren. Telegraphic address Carpil Barry. Minimum of 24 hours notice required of ETA. VHF Channels 16, 9, 14 and 11.

4

ANCHORAGE: Barry Roads: Good anchorages in moderate weather in depths from 5 to 6 fathoms (9.1 to 11 metres) about 0.5 mile S.W. of the entrance to Barry Docks. Clay bottom.

RESTRICTIONS: Entry to docks restricted to a period of 4 hours before and 3 hours after high tide, according to size and draft of vessel.

Entrance lock 850 ft. length, 90 ft. wide.

MAX. SIZE:

Queen Alexandra Dock. LOA 660 ft., beam 88 ft., max. draft 34 ft.

Roath Dock. LOA 650 ft., beam 86 ft., max. draft 33 ft.

Vessels near max. dimensions may be accepted on certain tides after consultation with the Dock Master.

HEALTH: Maritime Declaration of Health to be made to Port Authority or Customs Officer, whoever boards ship first. In event of contagious fever on board, Port Health Authority must be advised by radio before arrival. No pratique necessary if vessel is entering port from another port in U.K.

Also see "Health – All Ports" before first U.K. port.

RADIO: Ilfracombe Radio and Portishead Radio.

VHF: A port operation VHF service maintained at dock entrance during tidal hours. Call sign "Cardiff Radio" calling on Channel 16 and operating on Channel 14. There is also "Severn Radio".

TUGS: Tugs normally join vessel 0.5 mile to seaward of Outer Wrach Channel Buoy, and arrangements for attendance of tugs should be made through ship's Agent.

BERTHING: Arranged through Dockmaster, and berths within docks are flat quays. Rise and fall usually varies up to 1 ft.

SPECIALISED CARGO HANDLING FACILITIES:

Grain: Spillers berth, 2 Suction Plants. Average discharge 900 tons per day (450 tons per 8 hours per gang).

Coal (Imports): Pontoon berth, Roath Dock. Self-discharging vessels. Average discharge 4,000-5,000 tons per day (2,000-2,500 tons per 8 hours per gang).

Suction Plant: Roath Dock. Average discharge 300-400 tons per day (150-200 tons per 8 hours per gang).

Petroleum Products: 5 Petroleum berths (2 in Roath Dock; 2 in Queen Alexandra Dock and 1 in Penarth Harbour). Average discharge approximately 448 cu.m. per hour.

There are no specialised berths equipped for containers, roll-on/roll-off traffic, liquid chemicals, LPG carriers, fertilisers, sulphur, etc.

BRIDGES: Bridges throughout the port can be operated on tide times.

STEVEDORES: Arrangements for employment of stevedores undertaken by Docks Board through ship's Agent.

MEDICAL: All facilities available. Agents should be advised in advance if medical services required.

TANKERS: Three tanker berths available, one in Queen Alexandra Dock, two in Roath Dock where there is also a tanker-cleaning berth. Special instructions are issued to Master on arrival at port.

Penarth. One berth, 500 ft. long.

DENSITY: 1018..

FRESH WATER: Available 24 hours daily from quayside, delivery 20 t.p.h. maximum.

FUEL: Fuel of all grades available.

FIRE PRECAUTIONS: For tankers, strict fire precautions required in accordance with latest safety procedures.

Emergency Action – Fire: In the event of an outbreak of fire (no matter how small) immediately dial 999 on the ship-to-shore telephone. When the operator answers, say "Fire", and wait until you are connected to the Fire Station Control. Then repeat: "Fire at the Petroleum Berth, Roath Dock". In event of the ship-to-shore telephone being inaccessible or out of order, use GPO call box situated on dockside road to stern of the vessel.

GANGWAY/DECK WATCHMEN: Performed by ship's crew and necessary for tankers.

OPENING/CLOSING HATCHES: Carried out by ship's crew.

CUSTOMS ALLOWANCE: Tobacco, 1 oz. per day per man, max. 8 days. Wine/Spirits, 0.25 pint spirits per man per day every 4 days.

IDENTIFICATION CARDS: Not needed.

CONSULS: Ships should contact Agent.

REPAIRS: All types of repairs possible.

DRY DOCKS: Dimension of largest dry dock 635 ft. × 75 ft. Dimension of smallest dry dock 600 ft. × 71.5 ft.

REPATRIATION: Facilities exist to exchange crews and repatriate to any part of world.

AIRPORT: Airport 11 miles from Cardiff, serving other airports to all parts of world.

TIME: Local time is British Standard Time, GMT plus 1 hour. GMT in Winter months.

HOLIDAYS: Good Friday; Easter Monday; Whit Monday (Spring Holiday); August (Summer Holiday) one day; Christmas Day; Boxing Day.

POLICE/AMBULANCE/FIRE: Dial 999 on public telephone service and ask for service required.

TELEPHONES: Ship/Shore telephone supplied at certain berths – service organized through ship's Agent.

GENERAL: Cardiff is a port which has very big range of tides and important that accurate ETA's and max. drafts supplied by ship's Master in order that Agent may place orders for tugs and Pilots in sufficient time to be in attendance when required.

AUTHORITY: British Transport Docks Board, Cardiff Docks.

AGENT: Lambert Brothers Ship Agencies Ltd., Exchange Buildings, Cardiff. Tel. 25201. Telex: 49348, Cables: "Lambert Cardiff".

CARRICKFERGUS: 50.43 N. 05.48 W. (See Plan Book)

PORT LIMITS: No. 1 Buoy Belfast Lough.

DOCUMENTS:

2 Crew Lists,
2 Passenger Lists,
1 Store List,
1 Personal effect List,
Ships Register,
1 Manifest or Bill of Lading.

PILOTAGE: Port Pilotage not compulsory but advisable. Pilots based at Carrickfergus Harbour. All Pilotage carried out by Belfast Pilots. Pilots board at No. 1 Buoy, Belfast Lough. Pilots can be contacted by VHF Channel 16.

ETA Messages: Advise Agents at least 24 hours before arrival through any British Coast Station. Pilots not less than 1 hour. ETA No. 1 Buoy (B) ETA GMT or BST (C) Draft SW.

ANCHORAGE: Midway between Harbour and Greypoint.

HEALTH: No Certificates required, in event of disease contact Agents.

Also see "Health – All Ports" before first U.K. port.

RADAR/VHF: Port Radar Service Nil. Harbour VHF Channels 14, 12 and 16 operated approximately 3 hours before H.W. to 1 hour after if ships are due.

TUGS: No tugs in Harbour but if required can be ordered from Belfast.

BERTHING: *Harbour Tidal:*

Depth alongside all berths MHWST	4.88 m.
Depth alongside all berths MLWST	1.83 m.
Max. draft of vessels	4.88 m.
Max. Beam of vessels	12.20m.
Width at entrance	16.20 m.

Quays:

Length of Commercial Quay	321 m.
No. 1 Berth (Caustic Acid)	61 m.
No. 2 Berth (Tanker Berth)	74 m.
No. 3 Berth (Most bulk cargoes)	76 m.
No. 4 Berth (Coal,Sulphur, Meal, etc.)	75 m.

Vessels discharging take bottom on soft mud.

Average Discharge 2 Grabs 150 t.p.h. at No. 3 and 4 Berth.

STEVEDORES: Provided by Messrs. John Kelly Ltd., Tel. 63612. Telex 74210.

TANKERS: Discharge controlled by Texaco Ltd., as plant is owned by them privately. Rate of discharge approximately 200 t.p.h. two 8 in. diameter pipes and one 6 in. pipe.

Usual safety precautions prevail.

Tankers not to enter Port without permission of Harbour Master.

Max. draft MHWST 4.88 m.

MEDICAL: One hospital available.

DENSITY: 1024.

FRESH WATER: Supplied alongside Quay approximately 10 t.p.h. Charge 10p. per ton.

FUEL: Supplied by Road Tankers. All grades available from major Oil Companies.

GANGWAY/DECK WATCHMEN: Not compulsory.

OPENING/CLOSING HATCHES: All vessels by crew.

CERTIFICATES: Ships Register on arrival.

CUSTOMS ALLOWANCE: 200 cigarettes each crew member, spirit, wine, etc., at discretion of Water Guard.

CARGO GEAR: Three crawler mounted diesel grab cranes. Two 3100 KGs.,one 3045 KGs.

IDENTIFICATION CARDS: Not required.

CONSULS: None. Most countries are represented at Port of Belfast approximately 9 miles from Harbour.

REPAIRS: Light repairs and welding only major repairs can be arranged at Belfast.

DRY DOCKS: None. Nearest at Belfast.

REPATRIATION: Good facilities for crew changes. Good railway and bus services.

AIRPORT: Belfast Airport approximately 22 miles served by regular lines.

TIME: GMT, plus 1 hour in Summertime.

HOLIDAYS: New Years Day, Easter Monday and Tuesday. 12th and 13th July, Xmas Day and Boxing Day.

Port Stevedores cease work Friday before 12th July for a period of 14 days.

POLICE/FIRE/AMBULANCE: Carrickfergus 62021.

TELEPHONES: Not possible to place on board. Good phone service convenient to ships.

SERVICES: All services readily available from Port of Belfast.

SHORE LEAVE: After clearing inwards no restriction on shore leave.

SURVEYORS: Most Classification Societies based at Belfast.

AUTHORITY: Carrickfergus Borough Council and Harbour Master.

CLYDE PORT (Including Glasgow, Finnart, Faslane and Greenock): 55.51 N. 04.16 W. (See Plan Book)

DOCUMENTS: For Customs Clearance and to meet Immigration Authorities requirements, following valid documents are required:

Ship's Crew List.
Port Health Declaration.
Register, Load-line Certificate.

Safety Equipment, Safety Construction and Safety Radio Certificates.
Derat Exemption or Fumigation Certificate.
British Tonnage Certificate.
Copy Manifests and Bills of Lading.
Grain Form (No. S/107) if bulk grain.
Completed Customs Form C.142.

PILOTAGE: Compulsory pilotage.

(a) To the East and North of a straight line drawn from Kempock Point, Gourock, to Strone Church Spire; and

(b) Within the area bounded on the North-West by a straight line commencing at Cloch Point and thence proceeding in a S.S.W'ly direction to the point located at Latitude 55° 53.80' North, Longitude 4° 55.11' West (being the position of "N" Buoy); on the West by a straight line commencing at the position of "N" Buoy as aforesaid and thence proceeding in a S.S.W'ly direction to Cumbrae Elbow; and on the South by a straight line commencing at Gull Point and thence proceeding in a S.E'ly direction to Farland Head.

(Gourock pilot station) tel. Gourock 31331. "Gourock Pilots Radio" Channel 14 — frequency 156.7 Mc/s.

Optional pilotage is available to and from Cumbrae Island.

Vessel to advise Agent 72, 48 and 24 hours before arrival with subsequent advice of any changes to ETA, stating where Pilot required to board, ETA and draft.

Normal ladder, etc., for Pilot boarding.

Limits of Pilotage District:

(i) To the East of the Isle of Arran a line drawn due East and West across the river or firth of Clyde from the coast of Ayrshire to Corrygills Point on the East Coast of the Isle of Arran; and

(ii) in Kilbrannan Sound a line drawn due East and West across the river or firth of Clyde from the N.W. coast of the Isle of Arran to the coast of Kintyre being an extension of a line drawn due East and West from the Southernmost point of the island of Little Cumbrae to the N.W. of the Isle of Arran.

ANCHORAGES: As defined by Clyde Port Authority and in special circumstances (e.g. draft, condition of ship, hazardous cargo, etc.) under advice of Pilot.

Anchorages are available for vessels of all drafts in the Tail of the Bank area (off Greenock) and lower Firth of Clyde.

RESTRICTIONS: As defined by Clyde Port Authority and under Clyde Pilotage Authority requirements.

MAX. SIZE: As defined by Clyde Port Authority for berths in Glasgow and Greenock and subject to consideration of particular circumstances prevailing in each case.

HEALTH: The Master of a foreign-going vessel proceeding direct from a foreign port must send a wireless message to "PORTELTH GLASGOW" when he is required to do so under the Public Health (Ships) Regulations. Also see "Health – All Ports" before first U.K. port.

RADIO: Any GPO radio station.

There is a Port Operations VHF/FM system in operation utilising Channels 12, 14 and 16 in the International Maritime Band as under: West of Newark Castle, Port Glasgow Channel 12, East of Newark Castle, Port Glasgow Channel 14, calling up, Channel 16.

RADAR/VHF: Radar service not available. Port Radio service.

TUGS: As required by Master and under advice of the Pilot. Tug's lines only are used.

CONTAINER HANDLING FACILITIES: Container terminal at Greenock for two container ships to berth and work simultaneously. 22 straddle carriers and three transporter cranes available. Length of Quay 1,200 ft. Depth 42 ft. LWOST.

GRAIN HANDLING FACILITIES: *Meadowside Granary:* Total capacity, 176,000 tons. Six grain elevators, each with discharge rate of 200 t.p.h.

STEVEDORES: Arranged by Agent in accordance with Master's advice of ETA.

MEDICAL: Full medical and hospital facilities available.

TANKERS: Agents will advise Master by radio to prepare appropriate manifold connections. No slop facilities at Old Kilpatrick, Bowling, Faslane, Finnart. Facilities are available at Scott Lithgow Tank Cleaning Berth, Greenock, for the reception and processing of dirty ballast at 1,000 tonnes per hour and sludge at 800 tonnes per hour. Also available is a slop tank with a capacity of 1,800 tonnes.

Oil installations:

Bowling (ESSO): Private berth. Maximum length of vessels swinging off Bowling Basin is 550 ft. under suitable conditions. Berthing and unberthing is permitted day and night, according to state of tide.

A port regulation prohibits ships which are not gas free and have on board or have carried cargo with a flash-point of below 73 degrees from navigating the river East of Bowling.

Old Kilpatrick: Admiralty oil installation. Canting facilities in the river off Rothesay Dock, maximum length of vessels permitted is 630 ft. during daylight and under suitable weather conditions. Admiralty, Old Kilpatrick, advise maximum length at the berth is 570 ft., draft 30 ft.

Berthing and unberthing is permitted day and night, according to state of tide. Fully loaded vessels are berthed port side to at high water and must be capable of discharging over the tide. Light or partly loaded vessels may swing on arrival, berth starboard side to.

No low flash-point cargo may be discharged and vessels having low flash-point on board are not permitted at this berth.

Vessels which have carried crude oil as previous cargo are not permitted to load at this berth unless all tanks have been cleansed. There are no facilities for receiving dirty ballast.

Finnart: B. P. Installation. Maximum permissible size of vessel 330,000 d.w.t. — maximum draft 90 ft. salt water.

Faslane: Esso Petroleum. Maximum permissible size of vessel 40,000 d.w.t.

DENSITY: Port of Glasgow — Brackish.

FRESH WATER: Available at all berths by shore hose.

FUEL: All major oil companies represented in Glasgow. As much notice as possible required, all grades can be supplied.

FIRE PRECAUTIONS: As per Clyde Port Authority Regulations. Tanker berths — as per B.P., Esso and Admiralty Regulations.

GANGWAY/DECK WATCHMEN: At Master's discretion.

OPENING/CLOSING HATCHES: To be carried out by ship's crew.

CUSTOMS ALLOWANCE: On arrival from a foreign port with foreign cargo an allowance of 100 cigarettes per man for each four days in port, whilst discharging foreign cargo, and an allowance of a 0.25 pint of spirits is allowed for each man per day in port up to four days.

CARGO GEAR: Valid test certificates required for all cargo gear.

IDENTIFICATION CARDS: Not required.

CONSULS:

American
Brazilian
Danish
Ecuador
German
Italian
Panama
Spanish
Uruguayan
Belgian
Cuban
Dominican
Finnish
Netherlands
Liberian
Norwegian
Portuguese
Swedish

REPAIRS: All types of deck and engine repairs can be effected in the Clyde Area.

DRY DOCKS: Size of largest dock in Clyde area: Scott Lithgow dry dock, Greenock: 1,000 ft. long clear from gate to head of dock; 156 ft. cope to cope; 150 ft. clear width between altars; 145 ft. clear width at entrance; 45 ft. top of keel blocks to cope; 37 ft. draft on sill HWOST; 27 ft. draft on sill LWOST.

In addition, there are eight other dry docks in Glasgow/Greenock area.

REPATRIATION: Facilities for crew changes, and full repatriation services are available.

AIRPORT: Glasgow Airport (12 miles from city centre) and Prestwick Airport (30 miles from city centre) are served by most major domestic and international airlines.

TIME: BST (1 hour ahead of GMT) in operation. GMT in Winter months.

HOLIDAYS: Details of official dock holidays on which cargo work cannot be arranged can be obtained from the Marketing Department of the Port Authority on request.

POLICE/AMBULANCE/FIRE: These services can be called by telephone by dialling 999 or contacting Clyde Port Harbour by VHF.

TELEPHONES: Telephones can be placed on board at most docks by the G.P.O., charges vary according to berth, type of service and whether pre-pay call-box type or linked to exchange.

SERVICES: Tank cleaning. Facilities are available for service to ship's radio, navigation aids, etc.

SHORE LEAVE: Crew allowed ashore at Master's discretion and subject to compliance with Immigration and any other interested Authorities' requirements.

DEVELOPMENTS: An ore/coal terminal is under construction at Hunterston. The terminal will be able to accommodate vessels of 350,000 tonnes d.w.t. Completion is expected by the end of 1978.

AUTHORITY: Clyde Port Authority.

COLCHESTER: 51.54 N. 00.55 E. (See Plan Book)

PORT LIMITS: Brightlingsea anchorage.

DOCUMENTS: As normal British port.

PILOTAGE: Part of Trinity House London District. Sunk Pilot Cutter cruises near the Sunk light vessel. Give as much notice as possible by radio telephone or VHF Channel 16. River pilots are ordered by local Agents and board vessels at Brightlingsea anchorage.

ANCHORAGES: Off Brightlingsea, in 3 to 4 fathoms.

RESTRICTIONS: Vessels with deck cargoes of timber, and vessels which are large for the port not worked at night.

MAX. SIZE: Max. length at Colchester, 200 ft. Max. length at Rowhedge and Wivenhoe, 250 ft. Max. draft at Colchester, 12 ft. 06 in. Spring tides, 8 ft. 06 in. neap tides. Max. draft at Rowhedge and Wivenhoe, 14 ft. 06 in. Spring tides, 10 ft. neap tides.

HEALTH: Normal procedure. Any abnormal conditions advise Harbour Master. Pratique automatic if from U.K. port.

Also see "Health – All Ports" before first U.K. port.

RADIO: North Foreland Radio, Humber Radio or Niton Radio. 2182 kc/s.

VHF: 'Colchester Harbour Radio', VHF Channel 14, Office hours watch plus tide time watch when ships expected. Vessels should call when approaching port anchorage, giving deepest draft, and keep listening watch on Channel 14 when manoeuvring.

RADAR: None.

TUGS: Small motor tug available through Harbour Master.

BERTHING: 1,000 ft. of private quays. 3,200 ft. of public (corporation) quays. All berths use shore equipment and handle all cargoes. Port dries at LW. (Berths at Wivenhoe 450 ft., at Rowhedge 500 ft. additional to above.)

CRANES: A number of 4/6 ton mobile cranes.

BULK CARGO FACILITIES: Bulk cargoes handled at most berths, 3 grain silos.
STEVEDORES: Arranged by Local Agents. Average rate for all cargoes 50 metric t.p.h.
MEDICAL: Advance notice if possible. Hospital available.
TANKERS: One oil depot for discharging only, light fuels handled. No slop facilities.
DENSITY: Density varies with tide, average 1015.
FRESH WATER: Fresh water points on quays, rate approximately 9 metric t.p.h, cost approximately £1 per tonne.
FUEL: All fuel deliveries by road tanker.
FIRE PRECAUTIONS: None.
CONSULS: None.
REPAIRS: Repairs can be carried out. One shipyard (J. W. Cook) at Wivenhoe.
SURVEYORS: Lloyds Agent can arrange.
GANGWAY/DECK WATCHMEN: Not normally required.
OPENING/CLOSING HATCHES: By crew.
CUSTOMS ALLOWANCES: British standard allowances.
CARGO GEAR: Shore gear, no heavy lifts.
REPATRIATION: Arranged by Agents.
AIRPORT: London 70 miles.
TIME: GMT.
HOLIDAYS: Normal British holidays, work sometimes arranged.
POLICE/AMBULANCE/FIRE: Tel. 999.
TELEPHONES: None.
SERVICES: Compass adjusting arranged by Agents.
SHORE LEAVE: Allowed.
IDENTIFICATION CARDS: Not required.
DELAYS: Normally tidal delays only.
AUTHORITY: Colchester Borough Council and Harbour Master.

COWES (including Newport, Isle of Wight): 50.46 N. 01.18 W.

DOCUMENTS: As for "Portsmouth".
PILOTAGE: See Southampton entry for sea pilotage. As Cowes is within the Isle of Wight Pilotage District, a Sea Pilot must be employed by all vessels subject to compulsory pilotage. Trinity House Cowes Pilots conduct vessels between the anchorage area and berths in Cowes Harbour and Newport, 5 miles further up the River Medina. Pilots board from launches *Thosbro 1 and 2*, which are equipped with VHF, Channels 16, 12, 9 and 6. A Pilot can always be obtained by making a link-call to Cowes 3812 or 2501 (24 hours service) or via Southampton Pilots VHF Channel 16.
ANCHORAGES: Vessels waiting to proceed to Cowes or Newport should anchor within the area bounded by Old Castle Point, "Prince Consort" light-buoy and the harbour entrance light-buoy. The prohibited anchorage on either side of the leading line must be respected, and vessels must not obstruct the fairway into Cowes, nor the deep water channel used by large vessels bound for Southampton. The mooring buoys are reserved for hovercraft and the Trinity House lighthouse tender. Mooring chains run East and West for 500 ft. from each of these mooring buoys. Tidal streams in the anchorage are strong. Cowes is an international yachting centre, and the anchorage is often crowded with small craft, especially during July, August and September.

Cowes Roads anchorage, North of the deep water channel, is used by large vessels waiting to berth in Southampton Water, taking bunkers or changing crews.
MAX. SIZE: Cowes – 300 ft. long, 17 ft. draft at high water springs. Vessels must expect to take the bottom in soft mud at low water. Newport – 150 ft. long, 8 ft. draft. Newport Harbour practically dries out at low water.
RESTRICTIONS: Tankers may load and discharge at all times, subject to the Petroleum Acts.

A channel marked by small orange buoys is reserved for the use of hovercraft. Other vessels using the area should do so with caution.

Overhead cables at Kingston; 115 ft. above MHWS.
FLOATING BRIDGE: A chain ferry plies between East and West Cowes. An all-round amber light is shown from the leading end of the bridge when under way. Approaching vessels should sound 1 prolonged blast on the whistle when not less than 0.5 mile away. The bridge gives way to all river traffic. The chains of the ferry are at least 2 ft. above the river bottom in mid-channel at all times.
HEALTH: See "Portsmouth".
RADIO: See "Southampton" entry for Sea Pilot communications. See "Pilotage" entry for local communications.

Southampton Port Radio, the port operations and radar station for the port of Southampton, will often assist in cases of difficulty, although there is no obligation for them to do so and they accept no responsibility. Southampton Port Radio VHF Channels 16, 14, 12, 11, 10, 18, 20 and 22. Medium frequency through Nitonradio.
TUGS: Tow-boat launches are available to assist vessels.
BERTHING: *Medina Wharf.* Vessels 17 ft., spring draft, length 270 ft. OAL. Loading and unloading bulk cargoes of stone, coal, fertilisers, grain, etc.

Kingston Wharf. As for Medina Wharf, above.
STEVEDORES: By arrangement with Agent and wharf owners. Normal working hours: 0800–1700 Monday to Friday. Overtime on Saturdays, etc., by arrangement. No work on public holidays.
MEDICAL: All medical facilities are available. Agent should be given advance notice of requirements. If call is solely to land sick personnel, see "Southampton" entry.
DENSITY: Cowes – 1025 salt water.

Newport – varies according to amount of recent rainfall and state of tide.
FRESH WATER: Available on all commercial wharves.
FUEL AND DIESEL OIL: Available by arrangement with Agent.
CRANES: Hammerhead crane at J. S. Whites, 50 tons. Medina Wharf: 2 grabbing cranes of 4.5 tons for bulk cargoes.
OPENING/CLOSING HATCHES: By ship's crew.
REPAIRS: All hull and engine repairs undertaken to vessels capable of Cowes entry. Graving dock for ships up to 200 ft. in length and 14 ft. draft.
SERVICES: Compass adjuster, radar and radio mechanics available from Southampton. Charts and general stores available locally.
OIL POLLUTION: Cowes and the Solent are world-famous yachting centres. Pollution is dealt with severely.
AUTHORITY: Cowes Harbour Commissioners. Harbour Master.

DARTMOUTH: 50.21 N. 03.34 W. (See Plan Book)

PORT LIMITS: A line from Inner Froward Point to Combe Point.
DOCUMENTS: Normal documents for U.K. ports.
PILOTAGE: No direct radio contact with Pilots. Contact local Agent or Berry Head Coastguard Station who will telephone Pilot.

Pilot station 5 cables S.S.E. Castle Ledge Conical Buoy.
ANCHORAGE: Vessels can anchor in 5 fathoms, 7 cables 150(T) from Kingswear Lighthouse. Or in a position as above, for Pilot.
RESTRICTIONS: Vessels up to 27 ft. draft can enter at any time.
MAX. SIZE: Max. length 400 ft., max. draft 26 ft.
HEALTH: Pratique granted by Customs on arrival.

Also see "Health – All Ports" before first U.K. port.
RADIO: Route cables, etc., through Niton or Lands End Radio Stations.
TUGS: Tugs are not normally available.
BERTHING: All berthing on midstream buoys.
MEDICAL: All medical services are available; if possible give notice of requirement.
DENSITY: Normally salt. 1025.
FRESH WATER: Available only for small vessels.
FUEL: Not available.
FIRE PRECAUTIONS: Normal.
GANGWAY/DECK WATCHMEN: It is advisable to have watchmen.
OPENING/CLOSING HATCHES: Crew open.
CARGO GEAR: Ship's gear.
REPAIRS: All repairs unless of a major or underwater type can be carried out.
REPATRIATION: Facilities exist.
AIRPORT: 35 miles from Exeter airport. Internal and short range Continental flights.
TELEPHONES: Not normally available, except for HM ships.
HOLIDAYS: Not applicable.
POLICE/AMBULANCE/FIRE: Dial 999 for emergencies. Local hospital adjacent to Harbour Office.
SHORE LEAVE: Permitted. Seaman's book adequate.
GENERAL: Dartmouth does not now operate as a commercial port except for small vessels up to about 800 d.w.t. en route to Totnes, although the harbour is suitable for ships of 18,000 d.w.t., and mooring buoys are available for such vessels.

Lay-up facilities available for small coasters.
AUTHORITY: Dart Harbour and Navigation Authority.

DOUGLAS: Isle of Man: 54.09 N. 04.28 W. (See Plan Book)

PORT LIMITS: Douglas Bay inside a line between Douglas Head and Banks Howe and Douglas Harbour proper.
DOCUMENTS: Same as for all U.K. Ports.
PILOTAGE: Not compulsory. Arrangements usually made at least 24 hours before vessels' arrival, through Ships' Agent, or to Harbour Master, Douglas – Telephone: 23813. Call Douglas Radio on Channel 16 and then transfer to Channel 12 for instructions when entering control area 3 miles off Douglas.
ANCHORAGES: In Douglas Bay:
Douglas Head bearing 196° T 7 cables in 6 fathoms.
,, ,, 199° T 9.3 cables in 7 fathoms.
,, ,, 200° T 8 cables in 6.5 fathoms
,, ,, 212° T 7.9 cables in 10 fathoms
RESTRICTIONS: Enter only on Harbour Master's instructions.
MAX. SIZE: Max. size of Cross Channel Vessels 350 ft. LOA, draft 13 ft.

Max. Size of Cargo Vessels 190 ft. LOA, draft 12 ft. Spring tides 9 ft., neaps to inner Harbour, dries out at LW.

Max. size of Tankers 230 ft. LOA, draft 13 ft. at LWOST.
HEALTH: See "Health – All ports" before first U.K. port.
RADIO: Port Patrick for vessels coming from North. Anglesey for vessels coming from South.
VHF: Douglas Radio manned when vessels expected. Channel 16 and 12 only.
RADAR: Port Radar available for use in fog or when required. Used with Channel 12 VHF.
TUGS: None.
BERTHING: Passenger vessels – 6 berths for vessels of 350 ft. in length, 13 ft. draft LWST at Victoria Pier and King Edward Pier. Roll-on/Roll-off linkspan now in course of installation.

Isle of Man Steam Packet Company Cargo berth – vessels 225 ft. LOA draft 13 ft., dries out at LW. Served by 28 ton crane for container traffic.

Cargo Vessels – Battery Pier (22 ton crane on 25 ft. radius) berth vessels 180 ft. LOA with draft 12 ft. aft, 8 ft. forward at LWST.

Coffee Palace berth will accommodate vessels of 190 ft. LOA draft 12 ft. Springs, 9 ft. Neaps, dries out at LW.

Market berth same as Coffee Palace berth.

Battery Pier – Tankers up to 230 ft. LOA, draft 13 ft. at LWOST. Gas Tankers can berth at inner end of Battery Pier, vessels of up to 180 ft. LOA, draft 12 ft. aft, 8 ft. forward at LWST. Discharging of Cargo vessels and Container vessels can be done by shore crane.

All berths at Douglas are salt water.

CRANES: One 22 ton crane on 25 ft. radius at Battery Pier. The other cranes are 5 ton mobile cranes, capable of lifting about 2–3 tons when working at full radius. One mobile grab crane.

BULK CARGO FACILITIES: Bulk cargoes of coal and scrap metal are handled at Coffee Palace and Market Berths described above.

Rate of discharge for coal about 60–70 t.p.h. by Grab crane.

SPECIALISED CARGO-HANDLING FACILITIES: Containers are handled at Isle of Man Steam Packet Company berth and by 22 ton crane at Battery Pier

L.P.G. cargoes are handled at inner end of Battery Pier as described above.

BRIDGES: Swing Bridge only to Inner Harbour.

STEVEDORES: Advice required to Ship's Agent. Rate of discharge – cement 60 t.p.h.; coal 60 – 70 t.p.h.

MEDICAL: Advise Agent when possible, alternatively contact Harbour Master with advance warning. Hospital available.

TANKERS: Tankers pipe-lines 6 in. 2 Tanker berths at Battery Pier – Max. draft. 16 ft. to be taken in on flood tide only. 13 ft. only at LW Spring tides. Discharging rate 180–200 t.p.h.

DENSITY: Density of water salt (1025).

FRESH WATER: Fresh water available on request to Agent or Harbour Master.

FUEL: Fuel delivered by Road Tanker only. Contact Manx Petroleums or Esso.

FIRE PRECAUTIONS: Fire precautions as normal.

CONSULS: None.

REPAIRS: Limited facilities only.

DRY DOCKS: None.

SURVEYORS: None.

GANGWAY/DECK WATCHMEN: Could be arranged by Agent.

OPENING/CLOSING HATCHES: Handled by crew.

CUSTOMS ALLOWANCE: Same as U.K.

CARGO GEAR: Cargo can be discharged by ships own gear or Mobile cranes. 22 ton crane at Battery Pier.

REPATRIATION: Repatriation only done through arrangement with Agents.

AIRPORT: Ronaldsway Airport 8 miles from Douglas and served by regular air lines.

TIME: Same as U.K.

HOLIDAYS: Good Friday, Easter Monday, Spring Holiday, T.T. Friday (1st week in June), Tynwald Day (5th July), August Holiday, Christmas Day, Boxing Day, New Year's Day, 2nd January.

TELEPHONES: No connections to ships.

POLICE/AMBULANCE/FIRE: Police phone, 4616; Ambulance phone, 3661; Fire Brigade phone, 3333.

SERVICES: None.

SHORE LEAVE: Allowed.

IDENTIFICATION CARDS: Identification cards not required for British Ships. Same as U.K.

REGULATIONS: No unusual regulations.

DELAYS: Delays can be expected due to tidal conditions, or awaiting a berth; also delays caused by strong Easterly winds, which make Douglas Outer Harbour untenable.

AUTHORITY: Chief Harbour Master, Isle of Man Harbour Board.

DOVER: 51.07 N. 01.18 E. (See Plan Book)

DOCUMENTS: Required on arrival:

Crew List H.O. Form I.B.6. for H.M. Immigration.

Crew Declaration Form C.142 for H.M. Waterguard. (Duplicate).

Deratisation Certificate.

It is required to report and clear a vessel at Customs House if remaining in port more than 24 hours for loading and discharging cargo or embarking and disembarking passengers, with following:

Passenger List. Cargo Manifests. Ship's documents.

PILOTAGE: Requests for Pilot normally made by local Agent.

Vessels from Westward obtain Pilot from Pilot station, Folkestone.

Vessels from Eastward obtain Pilot from position approx. 1 mile S.E. of Dover Harbour Eastern Arm Head.

Vessels approaching Dover Harbour Entrances should do so with caution in accordance with instructions from Port Control. Masters are warned of the high frequency of cross channel vessels and hovercraft entering and leaving by both entrances.

Port Control: Signal Station situated at end of Eastern arm operates VHF Channels 74 (Port Control Frequency) if not fitted with Channel 74 vessels should call on Channel 16 and will be directed to use Channel 12.

Motor launches serving Pilots are also fitted with VHF Channels 74, 12 and 16.

DEEP SEA AND COASTAL PILOTS: For Channel, North Sea, British Coast and Baltic.

Contact agency 36 hours before arrival by radio, giving ETA Dover and destination port(s).

Agencies are: "Hutchinson Gravesend" and "Hammond Dover".

On approaching Dover contact Port Control by VHF for instructions and: For "Hutchinson" Pilot – hoist, flash or sound No. 1. For "Hammond" Pilot – hoist, flash or sound "B".

Pilots will also board at any UK or continental port as required.

ANCHORAGE: Limited space available in Outer Harbour. Contact Port Control in advance for instructions.

RESTRICTIONS: Attention is drawn to the strict requirement of obtaining permission to enter or leave the harbour. It will be noted that although the traffic control signal may be exhibited for entry/departure, every vessel manoeuvring to enter or leave the port is required to obtain specific permission to enter or leave, as the case may be.

Vessels awaiting permission to proceed should keep at a safe distance and clear of the entrance until so authorised. Responsibility for entering or leaving with caution and the safe navigation of each vessel subsequent to the receipt of permission to proceed continues to remain the responsibility of the Master.

Explosives – dangerous cargo: Declaration to be made and permission obtained prior to entering the harbour. Board not compellable to receive within the harbour any articles which in their opinion would endanger safety of harbour or vessels or goods.

HEALTH: Vessels arriving in Dover Outer Harbour are boarded by Water guard who grant pratique on arrival. Coastwise vessels from U.K. ports have automatic pratique.

Also see "Health – All Ports" before first U.K. port.

RADIO: Vessels from East use North Foreland Radio call sign GNF and vessels from Westward use Niton Radio call sign GNI.

RADAR/VHF: Port Control is fitted with radar and VHF, and Masters can make initial contact with Port Control VHF Channels 74, 16 and 12. Operational frequency is Channel 74. See "Pilotage".

TUGS: 2 tugs of 1,200 h.p. Tugs normally join vessels inside Dover harbour, but meet vessels outside by arrangement. Charges £90–£112 per movement. Tug's ropes normally used at a charge of £7.50 per rope.

BERTHING: All berths in Outer Harbour can be reached at all times. Those in dock can be reached from 2 hours before until up to 1 hour after each high water. All berthing requirements are allocated by Port Control.

Spring rise 19.4 ft. (5.9 m.). The Outer Harbour which comprises an area of approx. 600 acres with depths of water up to 30 ft. (9 m.) at MLWS is bounded by the Southern Breakwater (detached mole), the Eastern Arm and the Admiralty Pier. Anchorage restricted to limited area as shown on Admiralty Charts – normally used by vessels awaiting to berth or enter dock.

Western Docks: Comprising the Admiralty Pier, the Train Ferry Dock, the Inner Harbour, Tidal Basin, Granville and Wellington Docks.

Admiralty Pier: Length 4,140 ft. (1,260 m.), protects the Harbour from the West. There are 4 deep water berths with depths from 17 to 26 ft. (5.2 m. – 7.9 m.) at MLWS. The 3 inner berths are used for Cross Channel traffic, 2 berths being for passenger ferries only, and the third for roll-on/roll-off traffic.

Prince of Wales Pier: This separates the Inner and Outer Harbours and offers 1,600 ft. (488 m.) of berthing for vessels up to 23 ft. (7.0 m.) at MLWS. It should be noted that berthing on Prince of Wales Pier is only permitted by special arrangement with the Harbour Master.

West Hoverport: From July 1978 all hovercraft services will operate from here and Hoverport in Eastern Docks will transfer all operations to West Hoverport which is adjacent to and West of Prince of Wales pier. "Seaspeed" operate daily services for passengers and accompanied cars to Boulogne and Calais.

Train Ferry Dock: Adjacent to Admiralty Pier is operated by British Rail. Trains run direct into the ferries which operate daily services of Passengers and Freight to Dunkirk throughout the year.

Tidal Basin: Forming the entrance to the Wellington and Granville Docks is entered between the Admiralty and Prince of Wales Piers. It comprises an area of approximately 12 acres, the channel partly drying at low water. The entrance is 140 ft. (42.7 m.) wide with a depth of 19 ft. (5.8 m.) at MHWS. There are 2 berths in the Tidal Basin with quay frontage of 300 and 360 ft. (91.4 m. and 109.7 m.) respectively, at which vessels take the ground at low water. These berths are principally used for the discharge of stone, slag and aggregates.

Granville Dock: (Approach channel with depth of 21 ft. (6.4 m.) at MHWS).

This dock is non tidal and comprises an area of 4.5 acres with depths of water of 21 ft. (6.4 m.) at MHWS, 17 ft. (5.2 m.) at MHWN with a total quay frontage of 1,850 ft. (564 m.). The entrance is 65 ft. (19.8 m.) wide and depth on the sill at MHWS is 21 ft. (6.4 m.). Electric portal cranes of 3 tons are installed and 3 ton mobile cranes are available. Transit sheds and open storage space are available at the dockside.

Wellington Dock: Non tidal and comprises an area of 8 acres with depth of water of 15 ft. (4.6 m.) at MHWS, 11 ft. (3.4 m.) at MHWN. Total quay frontage of 2,500 ft. (762 m.). The entrance is 70 ft. (21.3 m.) wide and depth on sill at MHWS is 15 ft. (4.6 m.). Transit shed and open storage are available at the dockside. 3 ton mobile cranes are available. Patent slipway 567 ft. (173 m.) in length is capable of taking vessels on its cradle of up to 175 ft. (53. 3 m.).

Eastern Docks: The docks comprise the Eastern Arm, the Camber, Car Ferry berths and Hoverport.

The Eastern Arm: Length 1,700 ft. (518 m.) protects the Harbour from the East. Berthing for vessels up to 27 ft. (8.2 m.) at MLWS.

Consisting of 3 berths which are used for passengers (not cross-Channel passengers), general cargo and reefer vessels, regular coastal oil tankers and for vessels taking water or stores.

The Camber: A tidal basin divided from the Outer Harbour by the South Jetty and Pier "A", it comprises an area of 21 acres with a depth of water of 15 ft. (4.6 m.) at MLWS. A "Roll-on/Roll-off" freight berth operated by Townsend Car Ferries Ltd. provides daily freight services to Zeebrugge, with additional berthing accommodation for vessels with drafts from 10 to 14 ft. (3.0 m. – 4.3 m.) at MLWS

Car Ferry and Freight Terminal: Operated by Dover Harbour Board. Berths 1 and 2 are situated in the Camber, Berths 3 and 4 being situated to the Westward between Pier "A" and Pier "B". The Car Ferry/Freight Berths provide berthing for vessels up to 400 ft. (122 m.) in length with depths of water of 19 ft. (5.8 m.) at MLWS. Berths are connected with loading bridges to enable cars, coaches and freight vehicles to drive direct on board the vessels operating to Calais, Boulogne, Ostend and Zeebrugge. Shore facilities provide modern Reception Buildings, Customs Clearance Halls, Restaurant, Banking facilities, Shipping Operators' Offices, Freight Compound and Assembly Area, Forwarding Agents' Offices. Spacious Assembly Car Parks for vehicles. 2 Container Gantries each with a lifting capacity of 20 tons which have a combined lifting capacity of 40 tons are available at the Freight Terminal.

CARGO-HANDLING FACILITIES: Seven berths equipped for handling roll-on/roll-off traffic. Additional berths under construction.

STEVEDORES: No particular ETA required as ship's Agent makes all necessary arrangements. *Packaged Goods.* Approximately 25 tons per gang per hour average discharging rate.

MEDICAL: Medical assistance can be arranged by Agent to vessels passing Dover Harbour. Doctor will board a vessel in English Channel or on arrival at anchorage in Outer Harbour. Hospital facilities are available.

DENSITY: 1020.

FRESH WATER: Available to all vessels by pipe-line 25 t.p.h.

FUEL: Gas oil available from Shell Mex & B.P. Ltd., and Esso. 24 hours notice required.

GANGWAY/DECK WATCHMEN: Supplied on request.

OPENING/CLOSING HATCHES: By crew.

CERTIFICATES: Certificates to be obtained for foreign clearance, Register, Load Line, Safety Construction, Passenger and Safety Equipment.

IDENTIFICATION CARDS: Necessary plus passes for ships personnel at Eastern Arm berths having to pass through Eastern Docks terminal. Passes obtainable from Dover Harbour Board Staff at berths.

CONSULS:

Belgium	Dover 203 203	Netherlands	Dover 201 201
Denmark	,, 201 201	Norway	,, 201 201
Finland	,, 201 201	Portugal	,, 201 201
France	Folkestone 52561	Spain	,, 201 201
Germany	Dover 201 201	Sweden	,, 201 201
Italy	Folkestone 53692		

REPAIRS: Facilities available for minor engine repairs. Radio and Radar repairs also possible.

REPATRIATION: All facilities exist.

AIRPORT: Most repatriations by air through London Airport.

TIME: Local time BST 1 hour in advance of GMT. Reverting to GMT in Winter months.

HOLIDAYS: Official holidays: 1st January; Good Friday; Easter Monday; Spring Holiday (end May); August Bank Holiday; Christmas Day; Boxing Day.

POLICE/AMBULANCE/FIRE: Dover 999.

TELEPHONES: Not available.

SERVICES: Repairs to radar equipment, compass adjusting, supply of charts and crew changes can be arranged outside Dover Harbour in the English Channel at all times.

SHORE LEAVE: Allowed.

AUTHORITY: Dover Harbour Board.

DUNDEE: 56.28 N. 02.57 W. (See Plan Book)

PORT LIMITS: A vessel is considered to be an "arrived ship" when:
(a) For berthing turn-arrival at Fairway Buoy.
(b) For Laytime – usually "off or at the berth" and subject to Charter-Party terms.

DOCUMENTS:
3 Crew Lists.
3 Passenger Lists.
1 Tobacco Manifest.
1 Health Declaration.
Cargo Manifests.
Bills of Lading.
Derat.
Lights Certificate.

PILOTAGE: Port Control Service, call sign "Dundee Harbour Radio", maintains a 24 hour listening watch on VHF Channel 16 (156.8 mc/s and also operates on Channels 12 and 11 156.6 mc/s and 156.5 mc/s).

Pilotage is compulsory in Dundee Pilotage District. Pilots board incoming vessels within a 3-mile radius seaward of Tay Fairway Buoy or as close to as weather permits. The pilot boat is only on sea station when shipping is expected and accurate ETAs are essential.

ETA should be given 6 hours before arrival either by radiotelephone link call to Dundee Port Control 24121 or by radiotelegram to "Dockyard Dundee" Dundee. Amendments may be made up to 2 hours before the original ETA. When within VHF range (approx. 25 miles from Tay Fairway Buoy) ETAs may be confirmed by contacting "Dundee Port Control" on Channel 16 and transferring to Channel 12 to pass messages.

Pilot boats, when on station, keep a listening watch on Channel 16 and transfer to Channel 6 (156.3 mc/s) to pass messages.

ANCHORAGES: Pilots are instructed where to anchor vessels. There are 3 deep-water anchorages to accommodate vessels up to 28 ft. draft. 2 to accommodate vessels up to 22 ft. draft, and other minor anchorages.

RESTRICTIONS: Tide and draft 28 ft. at MHWS. Vessels enter 2 hours before HW. 26 ft. at MHWN. Vessels enter 2 hours before HW.

MAX. SIZE: Length 600/700 ft., beam 90 ft., draft 28 ft.

HEALTH: Health declaration on arrival – if clean, automatic pratique. Suspect disease as per international requirements. Pratique automatic if already called at another port.

Also see "Health – All Ports" before first UK port.

RADIO: Any UK coast station. Nearest stations – Stonehaven and Forth.

VHF: Tugs operate on Channels 16, 12 and 6. Also see "Pilotage".

TUGS: Tugs join vessel in vicinity of West Ferry. Tug lines optional, charge made if tugs lines used.

BERTHING: Deep-drafted vessels must arrive at the fairway buoy at least 2 hours before HW to berth on same tide.

King George V Wharf: grabbing cranes (fertilisers, coal), General cargo and tanker berths. 28 ft. MLWS.

Eastern Wharf: roll-on/roll-off berth. General cargo. 20 ft. MLWS.

Camperdown Dock/Victoria Dock: general cargo, live cattle quarantine station. 16 ft. draft.

No container or liquid chemical facilities.

CRANES: Queen Elizabeth Wharf: 2×5 ton portal cranes
King George V Wharf: 3×7 ton portal cranes
1×5 ton portal cranes
1×3 ton portal cranes
Caledon West Wharf: 1×120 ton fixed electric crane.

All other quays served by mobile cranes up to 45 tons.

STEVEDORES: One ETA to Agent or port suffices for all services.

MEDICAL: If vessel arrives from a suspect port (e.g. India/Pakistan) doctor will board and request smallpox certificates. Advance notice required for ordinary medication for arrivals week-ends. Hospitals and casualty stations available.

TANKERS: Diameter of hoses – 8 in. Slop discharge facilities not available. 2 tanker berths – 28 ft. draft. Discharge only.

DENSITY: 1005 oz. at MLWS. 1002 oz. at MHWS.

FRESH WATER: Available, 24 hour service. Delivery, hose from quays. Rate, 30 t.p.h.

FUEL: Small quantities gas oil by road tanker. Also at Princess Alexandra Wharf by arrangement.

FIRE PRECAUTIONS: Regulations are handed to Master on arrival.

GANGWAY/DECK WATCHMEN: Recommended for large vessels.

OPENING/CLOSING HATCHES: Stevedores will give weather cover only.

CERTIFICATES: As required by Board of Trade (Lifesaving, Radio, Registry, Medicines, Crew Agreement, Load Line) also derat.

CUSTOMS ALLOWANCE: Foreign-going, 25 cigarettes or 1 oz tobacco per day. 8 days allowance granted. Home trade, same as for foreign-going but only 4 days allowance granted. Spirits, quarter pint per day for 4 days, further issue granted after 4 days for foreign-going only.

CONSULS:

Belgium	23044	Netherlands	22267
Denmark	23044	Norway	23044
Finland	23111	Portugal	22131
France	26061	Sweden	25512
Italy	25174		

REPAIRS: Engine and deck repairs by Robb/Caledon Shipyard and Kestrel Tayside Marine and Angus Engineering.

DRY DOCK: Dry dock available for vessels of up to 500 ft. length, 46 ft. beam, draft 13 ft. 6 in. Springs.

SURVEYORS: Lloyds and DTI.

REPATRIATIONS: Facilities exist.

AIRPORT: Only U.K. flights available.

TIME: British Standard Time (GMT plus 1 hour). GMT in Winter months.

HOLIDAYS: 1st and 2nd January; 2nd Monday April; Last Monday July; 1st Monday October; Christmas Day. Cargo can be arranged for all days except Christmas Day.

POLICE/AMBULANCE/FIRE: Tel. 999.

TELEPHONES: Quay telephones installed.

SHORE LEAVE: At the discretion of the Master.

IDENTIFICATION CARDS: Not required.

REGULATIONS: Absolutely no smoking, penalty £50.

AUTHORITY: Dundee Port Authority.

FALMOUTH: 50.09 N. 05.04 W.

DOCUMENTS:

1 Maritime Declaration of Health.
1 Crew's Effects List.
2 Ship's Report by Master, or Authority X S 4.
1 Home Office Form 1S6.
1 Stores List.
1 Certificate of Deck Cargo Tonnage.
1 Light Certificate.
1 Port Dues Certificate
Ship's Certificate of Register.
Mercantile Marine Office Certificate – for British ships only.
Load-line Certificate.
Safety Equipment and Construction Certificates.
Lloyds Certificate.
Derat Certificate.
Ship's Register.
Light Bills.

PILOTAGE: This is a compulsory pilotage district. The Pilot will board from a cutter 2 miles South of St. Anthony's Lighthouse. In poor visibility a ship requiring a Pilot uses the distinguishing signal of "G" to which Pilot Cutter will reply with "H" Pilots operate R/T on Channel 16, 12 and 9.

ANCHORAGES: Vessels in excess of 665 ft. usually anchor in Falmouth Bay. Other vessels in outer harbour. Mooring Buoys available.

MAX. SIZE: See "Tankers".

HEALTH: Foreign arrivals to complete Maritime Declaration of Health. They are cleared immediately on arrival by either a port doctor or an officer of H.M. Customs depending on where the ship comes from and whether there is sickness on board.

Vessels arriving from ports within accepted area (N. European ports) and coastal arrivals need not present Declaration in all cases; when there is sickness on board the Port Health Authority must be informed preferably not more than 12 hours and not less than 3 hours before arrival.

Also see "Health – All Ports" before first UK port.

TUGS: Available. On call during working hours and outside of hours when required if advance notice given. Tug's lines are to be used.

BERTHS: There is a large and 3 smaller dry docks and in addition, B.P. maintain a bulk storage plant. 13 deep-water berths. Combined frontage 8,000 ft. Vessels of 920 ft. have been accommodated. Draft LWOST 18 ft.–27 ft. depending on berth.

Offshore Exploration: Falmouth Docks and Engineering Co. operates an offshore supply base with all services and on an exclusive basis.

STEVEDORES: Employed through The Falmouth Docks and Engineering Co.

TANKERS: Tankers berth at Eastern Breakwater provided draft not more than 27 ft. berthing at H.W. Max. length 550 ft. Coast Lines Berth: Max. draft 16 ft. There is a tank-cleaning installation available. Tankers of 840 ft. with draft 17 ft. forward and 23 ft. aft have been accommodated at Eastern wharf.

FUEL AND FRESH WATER: All classes of fuel oil and diesel oil are available and water is piped on the Dock Company wharves. At the repair berths, or in Carrick Roads, bunkers and water must be delivered by barge. Water by tug in Carrick Roads.

CONSULS: Denmark, France, Greece, Netherlands, Norway, Sweden and Spain.

GANGWAY/DECK WATCHMEN: Available in shipyard on request.

OPENING/CLOSING HATCHES: Normally carried out by crew.

AIRPORTS: London (Heathrow and Gatwick) 5.5 hours via Reading, or Bristol, St. Mawgan, 35 miles.

MEDICAL: Doctors and hospital facilities available. Agents should be advised in advance of any medical attention required.

CUSTOMS ALLOWANCE: At the discretion of Local Customs Inspector. Normal allowances are equivalent to 0.5 lb. tobacco per man and equivalent to 1 bottle of wine per man. Allowances may be halved for home trade vessels. Vessels in port for more than 3 or 4 days may receive extra allowances.

REPAIRS: All ship repairs can be carried out by local repair yards.

DRY DOCKS: Falmouth Shiprepair Ltd.

Queen Elizabeth Dock:	length	850 ft.	width	130 ft.
Falmouth Docks, No. 1:	,,	555 ft.	,,	75 ft.
Falmouth Docks, No. 3:	,,	750 ft.	,,	88 ft.
Falmouth Docks, No. 4:	,,	648 ft.	,,	86 ft.

TIME: British Standard Time is GMT. British Summer Time – GMT plus 1 hour (Summer).

HOLIDAYS: 1st January; Good Friday (variable date); Easter Monday (variable date); Spring Bank Holiday (variable date); August Bank Holiday (variable date); Christmas Day (25th December); Boxing Day (26th December).

POLICE/AMBULANCE/FIRE: Dial 999 from any telephone and ask for service required. Or County Police, Penryn 72231; Dock Police, Falmouth 311400; County Fire Service, Falmouth 314274; Docks Fire Service, Falmouth 311400; Ambulance, Truro 2349.

TELEPHONES: Can be placed on board in dry dock and most repair berths but not at Eastern Oil Wharf.

SHORE LEAVE: Granted.

AUTHORITY: Falmouth Harbour Commissioners, Falmouth Docks and Engineering Co. (Statutory Co.).

FELIXSTOWE: 51.57 N. 01.21 E. (See Plan Book)

DOCUMENTS:

Stores List.
Crew List.
Health Declaration.
Manifests.
Bills of Lading.
Ship's papers, including Register, Load-line Certificate, Safety Equipment Certificate, Radio Certificate, U.K. Light Dues, if any.

PILOTAGE: Cork or Sunk Pilot station, Master's option. 12 hours notice ETA vessel Cork or Sunk Pilot Cutters to be given via G.P.O. Coastal Station (Northforeland, Humber Radio) stating g.r.t., max. draft, and port of destination. Cables: "Sunk Pilot Vessel" – Northforeland Radio within MF range. Sunk Pilot Cutter 2182 kc/s, VHF range 156.8 mc/s, VHF Channel 16 then transfer to 156.3 mc/s, VHF Channel 6.

ANCHORAGES: At Cork Light Vessel; Quarantine anchorage off Harwich Road; "Northshelve" off Harwich; and in River Stour.

RESTRICTIONS: All vessels up to 25 ft. draft can enter Harwich Roads day and night on any state of tide. Max. draft for Container Quays and Oil Terminal 30/33 ft. depending on tides. At least 3 ft. keel clearance required at all times between channel bed and keel of vessel.

MAX. SIZE:

(a) General cargo vessels: Dock Basin 145 ft. wide entrance. Depth 18 ft. LWOST. No lock gates. Suitable vessels able to leave on any state of tide.

North Quay: 640 ft. in length.
South Quay: 610 ft. in length.
East Quay: 430 ft. in length.
North Development: Depth 33 ft. LWOST.

(b) Container vessels. Container Terminal depth: 33 ft. LWOST. Approach Channel Harwich Harbour Estuary: 23.5 ft. LWOST.

(c) Roll-on, roll-off vessels; Ferry Terminal: Vessels up to 450 ft. overall. Depth 22 ft. LWOST. No. 3 Roll-on/Roll-off Bridge: vessels up to 500 ft. LOA. Depth 24 ft. LWOST.

No. 4 Roll-on/Roll-off Bridge: Depth 33 ft. LWOST.

(d) Tankers. Oil Terminal: Vessels 600 ft. overall. Depth 30 ft. LWOST.

HEALTH: Pratique flag in daylight and lighted signals in darkness to be displayed by vessel on arrival. Health Declaration to be given in writing or verbally by Master on arrival. If disease suspected, then report to pilot station who will advise Health Authorities.

Also see "Health – All Ports" before first UK port.

RADIO: Northforeland, Humber, Niton (or any other radio station convenient to vessel's position).

RADAR/VHF: Masters of all vessels are advised to read Notice to Mariners No. 5 of 1976 which outlines requirements and gives general directions for navigation in Harwich Harbour.

A new Operations Service jointly operated by the Harwich Harbour Conservancy Board and the Trinity House Pilotage Service, is provided from Harbour House, Harwich, and the Trinity House Pilotage Operations Service.

The new Service is provided by Harbour Board Officers and Trinity House Duty Pilots, co-operating mutually, on a continuous twenty-four hours a day basis to provide vessels using the Port with information and advice.

The following Communication facilities are available:

1. *VHF Radio Telephone*

Channel 16	Calling and safety.
Channel 12	Secondary Harbour Working frequency.
Channel 14	Prime Harbour Working frequency.
Channel 20	Harbour Board Radar information frequency.
Channel 11	Harbour Service frequency.
Channel 9	Pilotage Service frequency.
Channel 38	Trinity House frequency.

2. *Land Line communications*

(i) *Telephones*

Harbour operations:	Harwich 6535/6
Pilotage service:	Harwich 3129 and 6300

(ii) *Telex*

Trinity House Pilotage
Service and Harwich
Harbour Joint Operations Service: 98472

3. *Other Equipment*

The centre is provided with a standard Harbour Surveillance Radar 2, 16 in. conventional marine displays; also provided is an electronic tide gauge, wind direction and force instruments.

All vessels should provide timely advice of their arrivals and departures to and from the Port Complex and report their movements through the Harbour and its approaches as directed.

TUGS: Stationed at Felixstowe, join vessels Harwich approaches or where ordered by Pilots. Vessels to use tug lines at additional cost. Tugs on VHF Channel 16 (24 hours) Channels 6, 8, 9 or 12 working.

BERTHING: Regulated by Harbour Master through Pilot stations and tugs. Vessels able berth within restrictions of individual berths.

	Depth of water at LWOST	*Length of quay in feet*
Transatlantic Container Terminal	dredged annually to 33 ft.	2,040. Three container berths and 1 Roll-on/Roll-off berth
Dock Basin	18 ft.	East Quay 430; North Quay 640; South Quay 610. Vessels up to 350 ft. in length are accepted

	Depth of water at LWOST	*Length of quay in feet*
Ferry Terminal	22 ft.	360. Vessels up to 450 ft. in length are accepted
Northern Development	dredged annually to 24 ft.	No. 3 Roll-on/Roll-off bridge 450. Vessels up to 500 ft. in length are accepted
	dredged annually to 33 ft.	Dual purpose berth for General Cargo and No. 4 Roll-on/Roll-off bridge 1,100 ft.

CARGO HANDLING FACILITIES: *General Cargo Division:* Mobile pneumatic grain discharger, discharge rate 30 t.p.h. into silo with capacity of 6,400 tons.

Mobile cranes, capacity 30 tons. Scotch derrick crane, capacity 32 tons at 90 ft. radius.

Roll-on/Roll-off Division: No. 1 Berth: Transport Ferry Terminal. Upper and Lower deck loading ramps. Electric travelling crane, capacity 32 tons at 110 ft.

No. 2 Berth: One hydraulic loading ramp designed to carry loads up to 140 tons. Upper loading ramp designed to carry loads up to 32 tons.

No. 3 Berth: Hydraulic loading ramp designed to carry two lanes of traffic with loads up to 140 tons. Electric travelling crane with capacity of 35 tons at 95 ft. radius.

No. 4 Berth: Allows a combination of Roll-on/Roll-off and conventional vessels to be accommodated. The hydraulic loading ramp is designed to carry two lanes of traffic with loads of up to 140 tons.

Container Division: The Container Terminal South of the Ferry Terminal is equipped with one 40 ton and two 30 ton Portainer cranes capable of handling 20, 30, 35 and 40 ft. containers on automatic spreaders.

STEVEDORES: 24 hours notice required by Agent to advise stevedores of vessel's ETA, in order to arrange berthing and allocation of labour. All stevedoring arranged between Dock Company and vessel's Agent.

MEDICAL: Prior notice desirable through Agent to arrange attention. All services available.

TANKERS: 4-in. and 6-in. connections. No slop facilities. No facilities for gas freeing alongside or in harbour.

One tanker berth available. Vessels up to 600 ft. overall, max. draft 30 ft.

DENSITY: 1025 salt water.

FRESH WATER: Pipe-line connections to all quays. Delivery approx. 50 t.p.h. Barge service available for supplies to vessels at anchor.

FUEL: Only gas oil available, 35 sec. pipe-line and barge delivery. 24 hours notice required.

FIRE PRECAUTIONS: Standard precautions at all berths.

GANGWAY/DECK WATCHMEN: Not compulsory. If required, cost negotiable.

OPENING/CLOSING HATCHES: Work undertaken by crew.

CERTIFICATES:

Valid Derrick and Rigging Certificates.
Ship's Register.
Load-line.
Safety Equipment.
Radio.
Derat.
Construction.
(Light Dues Receipts).

CUSTOMS ALLOWANCE: 100 cigarettes or equivalent in tobacco or cigars per man. 1 bottle spirits.

IDENTIFICATION CARDS: Not necessary if in possession of Seaman's Book or Passport.

CONSULS: Royal Norwegian Vice-Consul Ipswich (9) 59281; Royal Swedish Vice-Consul Felixstowe 78844, Icelandic Vice-Consul Felixstowe 5651/4.

REPAIRS: Facilities exist for small repairs only.

DRY DOCKS: None available.

REPATRIATION: All facilities available.

AIRPORTS: Southend – 70 miles; Heathrow – 90 miles. International flights.

TIME: GMT. In Summer months, April to October, time advanced 1 hour.

HOLIDAYS: All normal Bank Holidays, but official notification of port closures for such holidays is given well in advance of relevant dates.

POLICE/FIRE/AMBULANCE: Emergency points on all quays. Tel. 300 or, outside dock area, 999.

TELEPHONES: Shore connections available by prior arrangement for vessels on regular trades.

GENERAL: ETA to Agent required 72 hours, 48 hours, and 24 hours prior arrival.

SERVICES: Most services available for dry cargo vessels, but no special tank cleaning or tank washing facilities for tankers.

SHORE LEAVE: No restrictions.

AUTHORITY: Felixstowe Dock & Railway Co.

AGENT: Hargreaves Fuel & Shipping, "B" Block, Container Control Office, Felixstowe Docks, Felixstowe, Suffolk. Tel: Felixstowe 6255, After hours, Felixstowe 2196. Telex: 98411. Cables: "Hargreaves, Felixstowe".

FISHGUARD: 52.01 N. 04.58 W. (See Plan Book)

DOCUMENTS: as for "Cardiff".

PILOTAGE: Local Pilot available on request. Pilotage compulsory.

ANCHORAGES: Eastward of a line joining Northern and Eastern breakwaters.

MAX. SIZE: Max. draft 19 ft.

HEALTH: See "Health – All ports" before first U.K. port.

RADIO/VHF: Fishguard Radio, VHF Channel 16 and 14.

TUGS: None.

FACILITIES: Stern loading, car and roll-on/roll-off Ferry Port.

CRANES: 2×6 tons and 1×22 tons.

STEVEDORES: No stevedores – vessels worked by British Railway staff.

MEDICAL: Doctors available. Hospital facilities 16 miles away.

DENSITY: 1025.

FRESH WATER: Available alongside quay.

FUEL: Available with prior warning.

GANGWAY/DECK WATCHMEN: Ship's crew.

OPENING/CLOSING HATCHES: Crew.

REPAIRS: Minor repairs by BR workshops and contractors.

SURVEYORS: At Milford Haven.

AIRPORT: Cardiff and Swansea.

CUSTOMS ALLOWANCE: 40 cigarettes. No wine or spirits unless proceeding on leave.

POLICE/FIRE/AMBULANCE: Dial 999. British Rail police on duty 24 hours.

SHORE LEAVE: Allowed.

AUTHORITY: Shipping and Port Manager.

FLEETWOOD: 53.55 N. 03.00 W. (See Plan Book)

DOCUMENTS:

Manifests.
Bills of Lading.
Ship's papers.
Crew Lists.
Customs Documents.
Health Documents.

PILOTAGE: Pilot to be picked up off No. 1 Fairway Buoy. Ordered through ship's Agent giving 24 hours notice of ETA.

ANCHORAGES: Good anchorage in outer limits of harbour in Lune Deeps in 14 fathoms.

RESTRICTIONS: Vessels under power must not navigate any portion of this harbour above No. 9 Buoy at a greater rate of speed than is necessary to navigate safely, also on passing other vessels, either steam or sail, hopper barges, pontoons in tow, etc., in the channels outside the above mentioned No. 9 Buoy and within harbour limits due care must be taken to pass them at a rate of speed that will not cause risk from displacement or what is commonly called "backwash", and that all vessels must be navigated in this harbour strictly in conformity with Rule 9 (Narrow channels) contained in the Collision Regulations for Preventing Collisions at Sea, 1972.

Vessels bound into Fleetwood must not enter the river without being sure they have sufficient depth of water to ensure their getting to the quays or piers to which they are bound.

In the event of any vessel grounding on the "Tiger's Tail" or in any other part of the Fleetwood Harbour, the Master shall not attempt to refloat the vessel by reversing the engines, or by any other means whatsoever, until all incoming vessels following have passed the stranded vessel and the channel is clear of shipping.

MAX. SIZE: (Within enclosed docks): 350 ft. LOA: 46 ft. 6 in. beam.

So far as draft is concerned, allowances have to be made for clearing the lock invert. These allowances vary according to the beam of the ship and the following scale may be taken as a guide:

Beam of Vessel		*Clearance Required*	
ft.	in.	ft.	in.
37	0	2	3
44	0	4	0
45	6	6	0
46	0	7	3
46	4	9	3
46	6 max.	10	3

HEALTH: See "Health – All ports" before first U.K. port.

RADIO: VHF Port Operations and Information Service. Call sign: Fleetwood Harbour Radio Channel 16 (156.80 mc/s): Calling and Safety. Channel 12 (156.60 mc/s): Port Operations.

All movements of vessels arriving for and sailing from the Harbour and Docks are controlled by the Harbour Master using the VHF Port Operations and Information Service located in the Harbour Master's Office on the West side of Fleetwood Harbour. (Lat. 53° 55′ 30″ N., Long 3° 00′ 12″ W.). This service is operated for the 24 hour period, and vessels must maintain a listening watch when approaching or leaving the Port. Messages must be restricted to matters appertaining to general navigation, berthing instructions and the safety of ships or persons within the Port Area. Messages of any other nature will not be accepted.

TUGS: Tug service operated by FFVOA Ltd., 190/192 Dock Street, Fleetwood.

BERTHING: Under normal conditions the lock gates operate for 2 hours each side of high water.

There is a 25 tonne capacity scotch derrick available for lifts at the Wyre Dock. 3 mobile cranes with 35 tonne capacity. The

General Cargo berths can be used for handling liquid chemicals and bulk cargoes. Grain can be shipped direct into silo (rate 200 t.p.h.) at one of these berths. There is a Roll-on/Roll-off berth in the harbour. This is a daily service to Larne and Dublin for wheeled vehicles and trailer loads.

STEVEDORES: Arranged through ship's Agent.

MEDICAL: Ship's Agent will organise medical attention if required.

DENSITY: 1015 at half tide; 1025 at high water.

FRESH WATER: Fresh water available through stand pipes. Charge according to consumption (sliding scale).

FUEL: All grades of fuel available.

FIRE PRECAUTIONS: No specific requirement outside usual "No smoking" precautions.

GANGWAY/DECK WATCHMEN: Ship's watchmen required.

OPENING/CLOSING HATCHES: Normally carried out by crew.

REPAIRS: 2 slipways located in Fish Dock with lifting capacities of 1,050 and 250 tons respectively.

REPATRIATION: Arranged through ship's Agent.

AIRPORT: Squires Gate, Blackpool, 10 miles away.

TIME: GMT in Winter. GMT plus 1 hour in Summer months.

HOLIDAYS: Christmas Day and Boxing Day; New Years Day; Good Friday and Easter Monday; Spring Bank Holiday; May 1st; Autumn Bank Holiday.

Cargo working can be arranged on any of these days upon request.

POLICE/AMBULANCE/FIRE: British Transport Police available on Docks Estate. Ambulance 999; Fire 999.

TELEPHONES: Can be arranged through Post Office.

SERVICES: Compass adjusting.

SHORE LEAVE: Crew members are allowed ashore.

AUTHORITY: British Transport Docks Board.

FOWEY: 50.20 N. 04.39 W.

PORT LIMITS: The whole of the Fowey River to a line across the entrance to the harbour. A vessel is considered to have arrived on entering the harbour unless she is anchored just outside by the Pilot to await suitable conditions for entering, in which case she is considered to have arrived on being so anchored.

DOCUMENTS:

Crew and Passenger Lists are helpful, but not essential.
Aliens List is essential.
List of Bonded Stores, including beer.
List of Personal Dutiable Articles owned by Crew.
Bill of Health, if available.
De-Ratisation Certificate.
Manifest of all cargo on board.
Copies of Bills of Lading.
Stowage plan, if available.
Normal Ship's Papers.

PILOTAGE: Vessel requiring Pilot gives ETA as far in advance as possible to Agent. Vessel displays normal signals off port. VHF calling Channel 16, working Channel 9. Pilot boats are black. The Pilot boards off entrance. Vessels can anchor South of entrance if necessary.

RESTRICTIONS: Vessels can enter at any time, if their draft is less than 18 ft. Otherwise according to tide.

MAX. SIZE: 460 ft. in length. Loaded draft of 28 ft. Vessels of this draft have to be handled at or near high water.

Vessels up to 486 ft. in length have been handled, but subject to prior consultation with the Harbour Master and owners of the loading berths.

HEALTH: See "Health – All Ports" before first U.K. port.

RADIO: Land's End Radio, Niton, or Portishead.

TUGS: 2 diesel tugs are available and normally join vessels on entering entrance. Ship's lines usually used. Only 1 tug required for vessels under 350 ft. length.

BERTHING: Vessels waiting for berths are normally moored, using their own anchor with their stern to a buoy. On the berth, vessels require long ropes.

A new berth (2 berths) 550 ft. in length is completed. Depth alongside 23 ft.

CARGO FACILITIES: The port is specially equipped to handle china clay and ball clay in bulk and in bags. No other commodity passes through the port either inwards or outwards. There are 5 berths each with a 3-ton crane and a bulk conveyor capable of handling up to about 330 t.p.h.

STEVEDORES: Earliest ETA possible is required, especially when a vessel arrives over week-end.

MEDICAL: If Medical Officer is required on arrival, advise Agent earliest opportunity. Hospital facilities are available.

DENSITY: River fully salt at all states of the tide.

FRESH WATER: Available at all jetties, delivered by hose and rate very variable.

FUEL: Gas/Oil only available. As much notice as possible is advisable.

GANGWAY/DECK WATCHMEN: Not normally employed.

OPENING/CLOSING HATCHES: Carried out by crew.

CUSTOMS ALLOWANCE: 200 cigarettes or 0.5 lb. of tobacco, if foreign-going. Wine and/or Spirits. 0.5 pint if foreign-going.

Half this allowance for vessels arriving from home trade ports.

IDENTIFICATION CARDS: Not needed.

CONSULS:

Belgium	J. H. Samuel, Trafalgar Square, Fowey. Tel. 3414
Finland	,, ,, ,,
France	,, ,, ,,
Sweden	,, ,, ,,
Denmark	Ross Carter, Albert Quay, Fowey. Tel. 3274.
Netherland	Ross Carter, Albert Quay, Fowey. Tel. 3274.

REPAIRS: Not possible. Minor repairs only.

REPATRIATION: Facilities exist.

HOLIDAYS: Saturdays, Sundays, and all Public Holidays.

POLICE/AMBULANCE/FIRE: Telephone 999.

TELEPHONES: No arrangements made for connection on board.

SERVICES: Compass adjusting can be arranged.

SHORE LEAVE: Allowed.

DELAYS: There is a possibility of delay in heavy rain.

AUTHORITY: Fowey Harbour Commissioners.

AGENT: Toyne Carter & Co. Ltd., Fowey, Cornwall. Tel. Fowey (072683) 3274. Telegraphic address: "Toyne Fowey". Telex: 45331 – AB: "Toyne G". After hours tel. Fowey 3428; 2370 or 2525. Ship's Agents and Shipbrokers.

GARSTON: 53.21 N. 02.54 W. (See Plan Book)

DOCUMENTS: HEALTH: and all general information, refer to "Liverpool".

RESTRICTIONS: Locking into/out of Garston commences 3 hours before HW and ceases 3 hours after for vessels of 250 ft. in length or under. Vessels over this length must enter when the river and dock are level – about 1 hour before HW to half an hour after.

MAX. SIZE: 500 ft. length, 63 ft. beam, draft about 6 ft. less than HW Liverpool.

RADIO: As Liverpool. VHF Channel 20.

BERTHING: *Stalbridge Dock:*

Width of entrance	65 ft.
Depth on sill	26 ft. 8 in.
Lock length	276 ft.
Total water area	14.5 acres
Length of quays	3,200 ft.

Old and North Docks: entered from Stalbridge Dock

Total water area	14 acres
Length of quays	4,610 ft.

Dock Facilities:

Stalbridge Dock:

	Capacity	*No.*
Cranes	10 tonnes	2
	7.5 tonnes	2
	6 tonnes	10
Coaling appliances	30 tonnes	2

High capacity fork and clamp lift trucks available.
Equalising beam giving a maximum lift of 18 tonnes available.

Old & North Docks:

Cranes	32 tonnes	1
	7.5 tonnes	2
	6 tonnes	9
	1.25–5 tonnes	4
Coaling appliances	23.5 tonnes	5

Warehouses 3,031 sq. m. (3,625 sq. yd.)

DENSITY: 1025.

FRESH WATER: Available Monday to Friday 0800 to 1600 hrs. All watering required outside of these hours is by arrangement and must be paid for at overtime rates. Rate of delivery, 10 t.p.h.

DEVELOPMENTS: Modernisation of coaling facilities under consideration. Further container berth under construction, anticipated becoming operational July 1978.

OPENING/CLOSING HATCHES: Hatches to be opened and closed by the crew except on request.

AIRPORT: Liverpool Airport, 1 mile distant.

HOLIDAYS: Normal English Bank Holidays. Vessels can be worked on these days but this involves additional payment.

POLICE/FIRE/AMBULANCE: Dial 999 and ask for service required.

TELEPHONES: No connection can be made to vessels.

GENERAL: Vessels are required to "stem" on entering the dock; that is, to send an Officer to the Pierhead Office to enter the vessel into the Stemming Book giving all details regarding the vessel and cargo and to sign the sheet.

AUTHORITY: British Transport Docks Board.

GOOLE: 53.42 N. 00.50 W.

PORT LIMITS: Goole is a river port with conservancy jurisdiction to the junction of rivers Humber, Ouse, Trent. However, laytime commences from commencement of next normal working shift after ship is on berth and ship's Agent has issued "Notice of Readiness". This may be 0800 hrs. or 1300 hrs. dependent on time of issue of notice.

Precedence of order of arrival of vessels is determined by arrival time at Ocean Lock Entrance, Goole Docks.

DOCUMENTS:
Bills of Lading/Manifests (prepared by Agents at port of origination).
"Imperfect" Customs Entry.
Request (to work vessel).
*Request for Immigration Officer to be in attendance – if carrying passengers.
*Crew List to Immigration Officer (for foreign personnel).
Ship's Register.
Ships Agent will normally notify Immigration Officer.

PILOTAGE: Compulsory from Spurn to Goole, two stages.
1st stage: Spurn Light Vessel to Hull Roads.
See "Grimsby" Pilotage.
2nd stage: Hull Roads to Goole. Pilot will board vessel in Hull Roads.

ANCHORAGES: Bull Anchorage on chart of Humber Estuary, or in Hull Roads, otherwise only on advice of Pilot.

RESTRICTIONS: State of tide, springs or neaps. Port entered during tidal hours, 3.25 hours before high water to half an hour after high water, according to draft. Pilots will advise.

MAX. SIZE: Vessels should be within following measurements: 300 ft. overall length, 50 ft. beam and 17/18 ft. draft. Vessels exceeding any of these measurements should seek advice before arranging to visit the port.

HEALTH: Pratique issued by H.M. Customs Waterguard (in absence of Port Health Official). Pratique accepted when entering after calling at another port in the U.K.
Also see "Health – All Ports" before first U.K. port.

RADIO: Via Humber Radio, call sign GKZ – call on Channel 16. Give ship's name and call sign and pass message. Also see "Hull" – VHF.

TUGS: Tugs available but not normally used. If required, to be arranged through Ship's Agent.

BERTHING: Berthing instructions given to vessel on arrival at entrance locks. No specific requirements.

SPECIALISED CARGO HANDLING FACILITIES: Three appliances for loading of rail-borne bulk cargoes, e.g. coal, coke, pitch, fluorspar, etc.
Two appliances for loading of canal-borne bulk cargoes (coal, coke, pitch, etc.).
Discharging of bulk cargoes by 12×7.5-ton and 5×6 tonne quay cranes, also 10 mobile cranes up to 40 tonne capacity, equipped with suitable grabs for sand, ores, fertilisers, coal, grain, sulphur, scrap iron, etc.
Road-borne bulk cargoes loaded by same grabs.
Two 32-ton Scotch derrick cranes for container handling.
50-ton and 40-ton electric travelling cranes for heavy lifts.
Roll-on/roll-off traffic (cars, etc.) accommodated at various berths. The docks are maintained at a constant level and specialised link span berths are not necessary.
No bulk liquid berths.

STEVEDORES: Arrangements made by Ship's Agent who should be given ample notice of time of arrival of vessel, Port Authority will advise.

MEDICAL: Ship's Agent will arrange for attendance of doctor on notification. Doctor's, dentists and hospital services available. Ship's Agent can arrange service required.

DENSITY: Water in Goole Docks is fresh water and is maintained at constant level. Entry is by locks. Density 1000.

FRESH WATER: Delivery by water-boat through hose-pipes. Rate 30 t.p.h.

FUEL: All grades available on reasonable notice being given to Ship's Agent.

FIRE PRECAUTIONS: No specific precautions unless there are exceptional circumstances, when special arrangements can be made with local Fire Service.

GANGWAY/DECK WATCHMEN: Necessary. Usually provided from crew. Otherwise by negotiation locally.

OPENING/CLOSING HATCHES: Responsibility of crew.

SHIP CERTIFICATES:
Ship's Register (including load-line).
Radio Safety.
Life-Saving.
Light Dues.
Change of Articles.
Deratisation Certificates.

CARGO GEAR: Normally not required, as ample port facilities available.

IDENTIFICATION CARDS: May be required to be produced to Immigration Officer or H.M. Customs offical, especially in the case of foreign flags.

CONSULS: France, Netherlands and Denmark.

REPAIRS: All types of deck and engine repairs possible by local ship repairers.

DRY DOCKS: No. 2 Dry Dock: 301 ft. length, 50 ft. width at entrance, 15 ft. depth on sill. Two other dry docks. The water in the wet docks at Goole is maintained at a constant level and all dry docks are entered direct from the wet docks.

REPATRIATION: Arranged by Ship's Agent.

AIRPORT: Humberside Airport. Daily services to Amsterdam, Aberdeen and London.

TIME: GMT in Winter; GMT plus 1 hour in Summer months.

HOLIDAYS: Good Friday; Easter Monday; May Day; Spring Bank Holiday (last Monday in May); late Summer Bank Holiday (last Monday in August); Christmas Day; Boxing Day and New Years Day. No cargo working on these days.

POLICE/AMBULANCE/FIRE: Dial 999 and ask for service required.

TELEPHONES: No arrangements for ship connection.

SHORE LEAVE: No restrictions.

REGULATIONS: Visitors to vessels require permits from Port Authority and Master or ship's Agent. Smoking not permitted ashore in dock area.

AUTHORITY: British Transport Docks Board.

GRANGEMOUTH: 56.01 N. 03.43 W. (See Plan Book)

PORT LIMITS: At Grangemouth a vessel is not considered to be an "arrived vessel" until she is tied up at the allocated berth.

DOCUMENTS:
1 Crew List.
1 Passenger List.
1 List of all high duty goods in crew's possession.
1 Cargo Manifest.
All Valid Certificates.

PILOTAGE: Compulsory in river. Pilot boards at Inchkeith. Pilot boat on VHF, also see "Radio".

ANCHORAGES: North of Grangemouth West Buoy, 2 fathoms. Charleston Roads 5 fathoms. East of Inchkeith, up to 8 fathoms.

RESTRICTIONS: 24 hour locking system in operation depending on draft. The height of the tide must always be taken into account when dealing with larger vessels.

MAX. SIZE: Dry cargo vessels: Length 600 ft., beam 90 ft. Tankers: Length 575 ft., beam 90 ft. Draft according to state of tide. Vessels other than tankers max. draft 25 ft. 6 in. Tankers, up to 32 ft. 6 in. max. draft.

HEALTH: See "Health – All Ports" before first U.K. port.

RADIO: Wick – Stonehaven – Cullercoats, coastal stations.
Port VHF (FM) Communications: Station: Lock Control Office, Lock Entrance, Grangemouth. This centre will maintain a continuous watch. Call sign: Grangemouth Docks.
156.8 Mc/s. Channel 16 calling and safety. All vessels should maintain a listening watch on this Channel and use it to establish contact with Grangemouth Docks. Once contact is established the Duty Operator will request vessels to shift to the Port Operations Channel.
156.7 Mc/s. Channel 14, Port Operations. A working Channel restricted to messages relating to the movement and safety of ships, and in emergency, to the safety of persons.
156.6 Mc/s. Channel 10, Inter-ship. A working Channel for tug-to-tug and tug-to-bridge communications.
156.3 Mc/s. Channel 6, Inter-ship. A working Channel for communication with other vessels.
No message of a personal character or messages of any other nature than those pertaining to the general navigation and safety of ships and persons within the Port Area can be accepted.

TUGS: Can join vessel at Hen and Chicken Buoy or Lock Gates. Optional use of towage lines. Cost for tug's line £15 per hawser.

BERTHING: The water in Grangemouth Docks is maintained at the same level by impounding pumps. On passing through the lock entrance berthing is allocated according to the nature of the cargo and draft of vessel.
The depth of water available at the berths varies in each dock, the max. depths being approx.: Grange Dock 26 ft.; Carron Dock 23 ft.; Old Dock 17 ft.

CARGO HANDLING FACILITIES: Bulk cargoes can be handled at most berths within the port. The East Wall berth has four 10-ton grabbing cranes. Other berths have 7.5 and 6-ton cranes. One 40-ton heavy lift crane. Container berth is 1,000 ft. long and has two 32-ton transporter cranes.
A Roll-on/Roll-off berth in operation. Liquid chemicals and LPG Carriers are handled at the BP jetties. No. 1 North Jetty, which is a common user jetty handles chemicals.

STEVEDORES: No particular advice necessary to stevedores. Essential, however, advise Agent 24 hours prior arrival, who will advise stevedores.

CUSTOMS ALLOWANCE: At the discretion of Local Customs Inspector. Normal allowances are equivalent of 5 ounces tobacco per man and equivalent of 1 bottle of wine per man. Allowances may be halved for home trade vessels. Vessels in port more than 3 or 4 days may receive extra allowances.

MEDICAL: No advance notice necessary. Hospital facilities available in immediate district.

TANKERS: B.P. Refinery (Grangemouth) Limited. Private jetties in Eastern Channel: Nos. 2 and 3, 32 ft. 6 in.; Nos. 4 and 5, 19 ft. 6 in. draft No. 1 North Side Jetty, pipe-lines connected to Ross Chemical and Storage Co. are 1.5 in. nitrogen line, 6 in. chemical line, 10 in. heavy fuel line, 2 in. fresh water supply, 8 in. motor spirit line, 8 in. gas oil line. Draft at No. 1 North 32 ft. 6 in.

DENSITY: 1019 average.

FRESH WATER: Available in most berths. Watermen supervise delivery on request. Delivery rate varies depending on berth.

FUEL: All grades available from oil installations.

GANGWAY/DECK WATCHMEN: Not necessary but can be done by ship's personnel.

OPENING/CLOSING HATCHES: Custom of port crew open and close hatches but stevedores will do so if required.

CERTIFICATES: For Customs Clearance valid Certificates in respect of radio, load-line, construction, safety equipment, deratisation, necessary.

CONSULS: Norwegian, Danish and Swedish consuls available locally.

REPAIRS: All types of repairs can be carried out afloat.

DRY DOCKS: Carron dry dock length 350 ft., breadth 50 ft., depth 22 ft. Middle dry dock length 335 ft., breadth 50 ft., depth 19 ft.
REPATRIATION: All facilities exist.
AIRPORT: 1 hour from Glasgow and Edinburgh airports where numerous connections for London thence world wide travel.
TIME: British Standard Time (1 hour ahead of GMT). GMT during Winter months.
HOLIDAYS: 1st and 2nd January; 1st Monday May; 3rd Monday July; 2nd Monday September; Christmas Day.
POLICE/AMBULANCE/FIRE: In public telephone dial 999 and ask for appropriate service. With dock circuit telephone dial 34 for Police or dial 51 and ask for Fire/Ambulance.
TELEPHONES: Telephones available at A and B sheds for placing on board.
SERVICES: Compass adjusting, calibrating, etc., can be done in river. No equipment for tank cleaning but can accept tank washings ashore.
SHORE LEAVE: Allowed.
AUTHORITY: Forth Ports Authority.

GRANTON: 55.59 N. 03.13 W. (See Plan Book)

DOCUMENTS:
1 Crew Declaration Form C.142 (Tobacco List).
1 Crew List.
1 Passenger List.
(Also see "Glasgow").
PILOTAGE: Pilot station Firth of Forth located at Granton, boarding station Inchkeith Island. Contact with Pilot cutters can be made on VHF Channel 16 and R/T 2182 kHz.
ANCHORAGES: Good holding ground at Inchkeith Island and Leith roadstead 18.3–31 m. Request should be made to Forth Navigation Service.
RESTRICTIONS: The entrance between the breakwaters is 103 m. in width. The rise of tide, 5.182 m. at springs and 3.658 m. at neaps, permits the entry or exit of vessels up to 6.7 m. draft at HW.

A red flag bearing St. George's Cross exhibited at the Middle Pier Head signifies that vessels should not enter the harbour until the flag is lowered. A green light takes the place of the flag during hours of darkness.
HEALTH: See "Health – All Ports" before first U.K. port.
RADIO: Forth, Stonehaven and Cullercoats radio stations.
RADAR/VHF: Port and estuary radar service. VHF contact can be made with Leith Harbour Radio on Channel 16. Forth Navigation Service now in operation.
TUGS: Sound signal for vessels requiring tug services is four long blasts. Tugs, if required, join the vessel in the roads. Ship's lines normally used. Tugs towing gear available, not compulsory.
BERTHING: *Middle Pier:* Quayage 347 m. max. depth 5.1 m. LWOST. In addition, there is a 137 m. crosspiece at the end of the pier where depth of water is 7.6 m. LWOST.

West Pier: Quayage 140 m. max. depth 7.0 m. LWOST.
TANKERS: Tankers up to 18,000 d.w.t. are accommodated at the end of the West Pier, adjoining port entrance.
MEDICAL: No advance notice of medical attention required. All hospital facilities available.
FRESH WATER: Available alongside at all berths.
FUEL: All grades available subject 24 hours notice in advance.
REPAIRS: Facilities available for all minor repairs.
AIRPORT: Edinburgh Airport, served by regular airlines, situated about 6 miles away.
HOLIDAYS: Public holidays observed annually: Third Monday in April; third Monday in September; Christmas Day (25th December); 26th December; 1st, 2nd and 3rd January.
AUTHORITY: Forth Ports Authority.

GRIMSBY: 53.34 N. 00.04 W. (See Plan Book)

DOCUMENTS: See "Immingham".
PILOTAGE: Compulsory. *Humber Pilotage District–Spurn Pilot Station:* A Pilotage Control and Radar Station (telephone no. 096-46-392; telex no. 527393) has been established on the Spurn Peninsula in a position Lat. 53° 34′ 29″ N., Long. 00° 06′ 48″ E.

The station is manned at all times with a Pilot Master in attendance and vessels bound to the Humber requiring the services of Humber Pilots must give advance notice by signal through a GPO Coast Station to the Spurn Pilot Station giving ETA at the seaward limits of the Humber Pilotage District, draft, and destination at least 12 hours in advance. Any adjustment to the time should be given at least 2 hours before arrival.

Vessels wishing to communicate direct with the Spurn Pilot Station by VHF radio telephony may if within VHF range (approximately 20 miles) call "SPURN PILOT" on VHF Channel 16 and after contact transfer to Channel 14 for passing messages.

(Note: Attempts to establish communication on VHF at extreme range can cause unnecessary intereference).

Inward bound vessels for Goole or the River Trent desiring to pick up Goole or Trent Pilots in Hull Roads should give at least 2 hours advance notice of their expected time of arrival in Hull Roads by signal through a GPO Coast Station to the Humber Ports Operation and Information Service (Telegraphic address "HUMBEROPS") or should immediately on arrival at Spurn report their expected time of arrival in Hull Roads by calling the above service ("HULL RADIO") on VHF Channel 16 then transferring to Channel 12 for passing arrival information.

Compliance with this procedure will ensure as far as possible, the shipping of Pilots without delay.
ANCHORAGES: Hawke and Sunk Roads, Haile, Spurn and Bull Anchorages. See "Hull". The Pilots will advise where to proceed to anchor and also provide Pilot.
MAX. SIZE: Maximum breadth 67 ft., maximum length of vessel that can be locked 268 ft. but vessels of greater length can enter docks on HW when all lock gates are open. 3 ft. clearance under the keel is required. Vessels having a draft of 19 ft. can normally enter the docks on any tide when the height of water is sufficient to allow 3 ft. clearance. Vessels with 21 ft. draft can be taken on spring tides. Vessels can enter usually approx. 3 hours before and 2.5 hours after high water.
HEALTH: Master has to report any "Reportable" illness as detailed in Form "Port 38" to "Porthealth Grimsby". Also see "Health – All Ports" before first U.K. port.
RADIO: Humber Radio, 2182 kc/s, or VHF Channel 16. Also see "Hull".
VHF: See "Hull".
TUGS: Normally join in Grimsby roads. Optional whether use ship's or tug's lines. Tugs operate from Immingham so plenty of notice required.
BERTHING: *Grimsby Docks:*

	Commercial Docks	Fish Docks
Entrance Locks:		
Length	90 m.	43.6 m. & 21.4 m.
Width	21.4 m.	10.6 m. & 13.0 m.
Sill level MHWN	6.8 m.	5.7 m. & 6.8 m.
Quay cranes	18 electric – capacity 3 to 10 tonnes 2 mobile cranes – for ship discharge	1 electric – capacity 15 tonnes 1 electric – capacity 5 tonnes 1 mobile – capacity 5 tonnes

There is one Roll-on/Roll-off berth in the Royal Dock, to/from Esbjerg and a second in the Alexandra Dock for the discharge of motor vehicles (VW).
STEVEDORES: Vessels are allocated labour in order of arrival so it is only necessary to give the Agent the ETA preferably before noon on the previous day. Normal working hours 0800 to 1700 hrs. Overtime can be worked 1700 to 1900 hrs. Monday to Thursday. On Saturdays and Sundays as required.
MEDICAL: Hospitals and all other medical facilities are readily available. If immediate attention is required on arrival please advise Agent by radio or telegram.
FRESH WATER: Available at all quays. Rate approx. 20 t.p.h.
FUEL: Normal gas and diesel oils available by both road and barge with at least 24 hours notice.
GANGWAY/DECK WATCHMEN: Not necessary, but the service is available if Master requires it.
OPENING/CLOSING HATCHES: Responsibility of the crew. The hatch beams can be removed and replaced by the shore cranes but there is an extra charge for this operation.
CUSTOMS ALLOWANCE: 200 cigarettes per 8 days. 1 bottle wine and 1 bottle spirits per 4 days. All seals to be broken.
CARGO GEAR: In accordance with the regulations laid down by H.M. Factories Inspector.
IDENTIFICATION CARDS: Some sort of identification whilst crew are ashore is advisable. (Seaman's Book or Passport).
CONSULS:

Belgium, Vice-Consul	Grimsby	59101
Denmark, Vice-Consul	,,	57521
Dominican Republic	,,	59101
Finland, Vice-Consul	Immingham	72387
France Consular Agent	Grimsby	50815
Germany (F.R.) Consul	,,	77830 or 59101
Greece, Vice-Consul	Immingham	76246
Iceland, Consul	Grimsby	44721
Netherlands, Vice-Consul	,,	43177
Norway, Vice-Consul	,,	55324
Sweden, Vice-Consul	Immingham	72387

REPAIRS: Facilities are available for all deck and engine repairs.
DRY DOCKS: Nearest at Immingham.
REPATRIATION: Can be arranged if required.
AIRPORT: Humberside, daily service to Amsterdam, London and Aberdeen. Easy access to all major airports via rail, etc.
HOLIDAYS: Christmas Day; Boxing Day; Good Friday; Easter Sunday and Monday; Spring Bank Holiday (end May); Late Summer Bank Holiday (end August). All except Christmas Day and Good Friday can be worked on overtime.
POLICE/AMBULANCE/FIRE: Docks Police – Grimsby 59181; Grimsby Police – Grimsby 57571. Emergency – Police/Fire/Ambulance 999.
TELEPHONES: Not available for connection on board.
GENERAL: The Grimsby Dock Master can be contacted on VHF Channel 16 and then change to Channel 18 for speaking.
SERVICES: Compass adjusting, tank cleaning, etc., are available.
SHORE LEAVE: Crew are allowed ashore.
AUTHORITY: British Transport Docks Board, Grimsby.

AGENT: Hargreaves Coal & Shipping, Division of Hargreaves Fuel & Shipping Ltd., Hargreaves House, Alexandra Road, Immingham Dock, Grimsby, South Humberside DN40 2NJ. Telex: 52308. Answer Back: "Arrow". Cables: "Arrow – Immingham". Telephone: 0469-76371 (8 Lines). After Hours Telephone: 0472-79313 (R. Clarke).

HARTLEPOOL: 54.42 N. 01.12 W.

DOCUMENTS: *Ship's Official Papers including:*

Ship's Register.
Ship's Construction Certificate.
Load Line Certificate.
Deratisation Certificate.
Safety Equipment Certificate.
Radio Equipment Certificate.
U.K. Light Dues Certificate.
Crew List.
Bills of Lading, Manifest and Stowage Plan (Usually sent in advance).
Ship's Stores List.

PILOTAGE: Call by VHF when 3 hours from port and again half an hour before arrival. 2 hours required for sailing. VHF Channel 16, 14, 12, 9, 8 and 6.

Pilotage not compulsory. Tel. No. Hartlepool 66030.

Pilots usually board in vicinity of Longscar Buoy from a cutter showing the usual international signals.

ANCHORAGE: N.E. of Longscar Buoy but special care must be exercised in vicinity of prohibited anchorages near Ekofisk Oil Pipe-line and River Tees Fairway.

RESTRICTIONS: Daylight entry only for vessels exceeding 24.4 m. beam. Entrance channel 1.1 km. long. 61 m. wide. Nominal dredged depth 5.7 m. below L.A.T.

MAX. SIZE: Overall length 181.3 m. Beam 29.2 m. reduced draft of 7.92 m. Vessels approaching any of the max. sizes must consult Dock Master in advance.

HEALTH: New Regulations. The Public Health (Ships) Regulations in force from 1st April, 1978. Also see "Health – All Ports" before first U.K. port.

RADIO: Cullercoats Radio. VHF Hartlepool Port Radio Channel 16 and 12.

TUGS: 2 twin screw diesel (1,200 h.p.) tugs available during tidal periods. Tugs ropes available at extra charge.

BERTHING: Victoria Harbour, Deep Water Berth. 295 m. Depth 9.5 L.A.T. Equipped with 10-tonne cranes.

Entrance to the enclosed docks at Hartlepool is by 'The North' entrance, Victoria Harbour, which has a depth of water 8.18 m. on the sill at M.H.W.S.T. the entrance width is 21.33 m.

North Basin (non-tidal)

No Cranes. Length of Dock 182.87 m. Depth on sill is 3.1 m. below L.A.T.

Central Dock (non-tidal).

No Cranes. Length of Dock 301.73 m. Width of Entrance 21.33 m. Depth alongside is 2.5 m. below L.A.T.

West Quay — Conveyor.

A dry cargo bulk loading appliance capable of loading any cargo of sizes up to 3 in. cube at the rate of 1,000 tonnes per hour, depending on density of cargo, into vessels of 8,000 tonnes carrying capacity or less, according to tidal conditions prevailing at the entrance locks.

North-West Corner.

Roll-on/Roll-off Berth. Max. length of vessel 135 m. Max. beam 18 m. Max. draft 6.25 m.

Union Dock (Non-tidal) 18 Cranes 10 tonnes – 3 tonnes. Length of quayage 1,551.94 m. Width of Entrance 20.32 m. Depth of Water of 2.2 m. below L.A.T.

Roll-on/Roll-off berth to handle loads of up to 450 tonnes. Max. length of vessel 85.34 m. Max. beam 14.93 m. Max. draft 5.79 m.

Coal Dock (Non-Tidal).

Length of Quayage 689.11 m. Width of Entrance 20.32 m. Depth of Water of 2.2 below LAT.

Jackson Dock (Non-Tidal).

Length of Quayage 600 m. Width of Entrance 20.32 m. Depth of Water of 1.6 m. below LAT.

STEVEDORES: All stevedoring undertaken by Port Authority on day work basis with voluntary overtime available (including week-ends). Shift working can also be provided.

MEDICAL: Full hospital and emergency services available at all times. Shore Telephone No. 999 or call on VHF 16.

DENSITY: 1025.

FRESH WATER: Available from shore hydrants and tugs at 20 t.p.h.

FUEL: Available by road and bunkering vessels.

GANGWAY/DECK WATCHMEN: Available by private arrangement through Agents.

HATCHES: To be opened and closed by ship's crew.

IDENTIFICATION CARDS: Seaman's Book or Passport advisable.

CONSULS:

Swedish
Norwegian
Danish
Netherlands
Portuguese
Belgium
West Germany
French Consular Agency
Finland

REPAIRS Deck and engine repairs available.

AIRPORT: Teeside Airport nearby with regular U.K. and Continental Services.

TIME: GMT and BST (GMT plus 1 hour) during Summer months.

HOLIDAYS: Normal Bank Holidays.

AUTHORITY: Tees and Hartlepool Port Authority.

HARWICH (Including Parkeston Quay): 51.56 N. 01.15 E. (See Plan Book)

DOCUMENTS:

1 Home Officer Form 1.B.6 may be obtained from HM Customs Boarding Officer.
1 C.142 Crew Declaration List.
1 Maritime Declaration of Health (Q Flag procedure).
2 Ship's report by Master.
1 Stores List.
1 Certificate of Deck Cargo Tonnage (if carried).
1 Grain Certificate (if carried).
1 Light Certificate.
1 Port Dues Certificate.
1 Passenger List required by vessels other than packet vessels.
1 Landing Card for each passenger.
1 Ship's Certificate of Registry.
1 Mercantile Marine Office Certificate – for British vessels only.
1 Load Line Certificate.
1 Safety Equipment Certificate.
1 Lloyd's Certificate.
1 Derating Exemption Certificate.
1 Ship's Register.
1 Lights Bill.
1 Radio Safety Certificate.

In addition Manifests and Bills of Lading are usually sent to Agent direct from loading port.

PILOTAGE: Pilotage into the harbour is compulsory for all ships of 50 tons and over, with the exception of vessels of not more than 3,500 tons gross regularly employed in the home and coasting trades and not carrying passengers.

SUNK PILOT STATION

The Sunk Pilot vessel has a black hull, a buff funnel, the word "Pilots" painted on her sides and flying the Pilot flag, and at night exhibiting lights and signals in accordance with Rule No. 29 of the International Rules for the Prevention of Collisions at Sea, cruises in the vicinity of the Sunk Light vessel to provide Pilots for ships making for the Port of London and other ports in London Pilotage District and to disembark Pilots from outward-bound ships; if unable to carry out her duties there through stress of weather, she moves into smoother water. In these circumstances shipping is warned by means of radio navigation warnings broadcast from North Foreland, Humber and Scheveningen radio stations, which give her position.

The attention of Masters is drawn to the requirement of stopping and giving a satisfactory lee for the pilot vessel's boarding boats. These 18 ft. boats have a max. speed of 5 knots and if ships being served maintain excessive headway, unnecessary difficulty is caused to both the pilot vessel and boats, and the operation of shipping a Pilot will be unduly prolonged.

Masters must ensure that these boarding boats are clear of their ships before proceeding to avoid damage and to safeguard the lives of the Pilots and Boat Crews.

Ships proceeding to either Maldon or Heybridge Basin must exchange their North Channel Pilots for Essex River Pilots at the Knolls, in favourable weather conditions, and in Brightlingsea Roads in adverse weather conditions.

The attention of Masters of VLCCs is drawn to the special arrangements for Pilot boarding described below.

ETAs and Amendments: Ships requiring a Pilot at the Sunk station should give the pilot vessel, 12 hours in advance and through a Post Office Coast station, their estimated time of arrival, gross tonnage, maximum draft and port of destination. Confirmation of ETA should be given at least 2 hours before arrival. Anything less than 2 hours notice must involve ships in delay.

Contact Procedure: Vessels wishing to contact the pilot vessel at the Sunk by radio telephony direct may:

(i) when within MF range (approximately 50 miles), call on 2182 kHz. (MF).
(ii) when within VHF range (approximately 20 miles), call on Channel 16 (VHF).

The pilot vessel may also be contacted by either W/T or R/T through any Post Office Coast Station addressed Sunk Pilot Vessel Northforeland radio.

Working Frequencies: Having made contact on 2182 kHz. (MF) or Channel 16 (VHF) ships should transfer to the working frequencies as follows:

2241 kHz (MF) or any other agreed licensed intership frequency for passing messages; Channels 6 or 9 (VHF).

Pilot Boarding Arrangements for VLCCs:

The Masters of all VLCCs requiring a Pilot at the Sunk pilot station are requested to comply with the following directions so as to ensure that the boarding operation can be carried out safely and with the minimum of inconvenience to the ship.

The Master of the VLCC should establish voice contact with the Sunk Pilot Cutter at the earliest possible time, consistent with the maximum range of either VHF or MF communication, as described above.

The Sunk Pilot Cutter will advise the VLCC:

(a) The position in which the Pilot will board and the time of boarding;

(b) The mode in which the Pilot will board i.e. with the VLCC under way or at anchor. If the VLCC is advised that the Pilot will board with the ship under way then the speed ordered should be minimal, consistent with maintaining steerage way or, alternatively, the ship should be stopped in the water.

In the interests of the safe boarding of the Pilot the VLCC should not proceed inwards beyond the vicinity of the agreed boarding position.

CORK PILOT STATION

Boarding Point: To facilitate the arrival and departure of ships trading to and from the ports of Felixstowe, Harwich and Ipswich, a Pilot station operates in the vicinity of the Cork *Lanby* in a position Lat. 51° 56′ 42″ N., Long. 01° 27′ 06″ E. *This station is additional to, but is not a substitute for, the Sunk pilot vessel. It is for the use of ships bound to or leaving the above-mentioned ports whose normal course does not take them past the Sunk pilot vessel.* Full service is also provided at the Sunk station.

The Cork station is operated by a fast Pilot launch with black hull and white wheelhouse, flying the Pilot flag, and at night exhibiting lights and signals in accordance with Rule No. 29 of the International Rules for the Prevention of Collisions at Sea.

The attention of Masters is drawn to the requirement when being served by a fast pilot launch of maintaining headway throughout the operation of shipping or landing a Pilot.

ETAs and Amendments: Inward Bound Ships. Ships requiring a Pilot at the Cork station should apply to the Sunk pilot vessel in the same manner and giving the same information but stating their estimated time of arrival at the Cork.

Outward Bound Ships: Masters of ships about to sail from Harwich and Felixstowe and wishing to use the Cork pilot station should state this when ordering their Pilots for departure. However ships may carry their Pilots out to the Sunk pilot station should they so desire. Pilots for ships outward bound should be ordered by telephoning Harwich (code 02555) 3129 – see Harwich Shore pilot station below.

Contact Procedure: The Cork pilot launches keep a constant listening watch on Channel 16 (VHF).

Working Frequencies: Having made contact on Channel 16 (VHF) ships should transfer to the working frequency Channel 9 (VHF).

HARWICH SHORE PILOT STATION (OPERATIONS)

The Shore pilot station (Operations) is situated at Harbour House, Harwich and is part of the Port Operations Service jointly operated by the Harwich Harbour Conservancy Board and Trinity House. It should be noted that Pilots' accommodation and administrative offices are situated at the main pilot station at Town Quay, Harwich.

The pilot station (Operations) is manned by a Duty Pilot and is equipped with VHF, telex, telephone and radar.

All requests for the services of Pilots for ships bound into or out of Harwich and Felixstowe should be made to this station. Orders for Pilots for outward bound ships should state whether the Pilot will be landed at the Sunk or the Cork. Requests from inward bound ships for the services of the Ipswich Pilots and for the Pilots for the Rivers Colne, Blackwater, Crouch and Roach may also be passed through this station.

Contact Procedure: A 24-hour listening watch is maintained on Channel 16 (VHF). The call sign is "Harwich Pilots Radio".

Working Frequencies: Having made contact on Channel 16 (VHF) ships should transfer to the working frequencies, Channels 9 and 12 (VHF).

Ships not fitted with VHF may contact the pilot station (Operations) through the Sunk pilot vessel on MF.

Other communication details are:

Telephone number:	Harwich (code 02555) 3129 or 6300
Telex number:	98472, Pilots Harwich

ANCHORAGES:

Ewarton: Situated to the North and West of Parkeston Quay with an average depth of 3.5 fathoms at low water.

Parkeston: Situated to the North of Parkeston Quay, with an average depth of 3 fathoms at low water.

Shelf: Situated on the Western side of the main Channel between the North and South Shelf Buoys. Average depth of 2.5 fathoms at low water.

Inner: Situated at the Pitching Ground. Average depth 4.5 fathoms at low water.

Cork: Situated to the Westward of the Cork Light buoy. Area approx. 2 miles×1 mile. Average depth 4 fathoms.

RESTRICTIONS: Normal max. draft allowed alongside the berths at Parkeston Quay is 20 ft.

Normal cargo working at Parkeston Quay ceases at 2200 hrs., but berthing and night work by arrangement at any time.

MAX. SIZE: Normal max. permissible length 500 ft. arrangements for larger vessels can be made. Normal max. permissible breadth for roll-on/roll-off is 75 ft. Normal max. permissible draft – 20 ft. The height of the tide does not restrict a vessel berthing alongside the quay if her draft is within 20 ft.

HEALTH: Maritime Declaration of Health required (Q Flag procedure). Obtain Pratique through HM Customs Boarding Officer if no sickness on board.

If there is sickness on board the Customs Official will notify the Duty Port Medical Officer.

If the vessel is from another port in the U.K. Pratique is automatic.

Also see "Health – All Ports" before first U.K. port.

RADIO: North Foreland Radio (call sign GNF) or Humber Radio (call sign GKZ) are the most convenient stations to pass ETA cables, etc., to Agents or receivers. The Pilot Land Station has a Surveillance Radar.

VHF: British Rail at Parkeston Quay keep a 24-hour listening watch on VHF Channel 16 and work on VHF Channel 18. Also see "Felixstowe" – VHF.

Harwich Harbour Conservancy Board operate Harbour Operations Station. Call sign "Harwich Harbour Radio". Listens on Channel 16 and operates on Channel 14. Channel 71 is the secondary working channel. The station is equipped with radar, information available on request on VHF Channel 20.

TUGS: 3 tugs are based at Harwich for use in the area – MT *'Sauria'* 1,600 h.p. MT *'Egerton'* 1,200 h.p. MT *'Langton'* 1,610 h.p. Tugs lines usually used, cost £7.20.

24-hour service, 7 days per week. Constant watch on 2182 kc/s. and Channel 16 VHF. Additional tugs up to 2,250 h.p. can be obtained from London at 24 hours notice.

BERTHING: There are 8 berths at Parkeston Quay, of which 2 are Portal Roll-on/Roll-off berths and 1 is a Pontoon Roll-on/Roll-off berth. Normally max. draft permissible alongside is 20 ft.

Berthing, etc., by arrangement. Applications for berths must be made through the Shipping or Port Manager, British Rail, Parkeston Quay, giving as much advance notice as possible.

Navy Yard – Harwich: Operated by Harwich Dock Co. Ltd.

Three berths

Berth No. 2-3: Length 540 ft. Depth 28 ft.

Berth No. 4 : Length 450 ft. Depth 14 ft.

Berth No. 5 : Length 400 ft. Depth 18 ft. (50 ft. extension under construction)

Each berth equipped with ramp.

Max. draft 26 ft. at No. 2-3 berth

Cranes:

2 Ajax C-60s. Mobile, capacity 60 tons.

1 Wild gantry crane – capacity 18.5 tons, for internal use only.

Other equipment includes 12 Tugmasters, 10 forklifts – capacity 10 tons, and three reefer points.

Fresh water available at No. 2-3 berth only.

STEVEDORES: All labour at Parkeston Quay are members of National Union of Railwaymen, and arrangements for their use must be made through the Shipping and Port Manager, British Rail, Parkeston Quay.

MEDICAL: Prior notice through British Rail, Parkeston Quay, desirable to arrange attention. All services are available.

TANKERS: A berth is available for tankers for the purpose of discharging and loading to the local oil refinery.

DENSITY: 1025 (sea water).

FRESH WATER: Fresh water can be supplied from quayside hydrants.

FUEL: Can be arranged by either barge or road tanker.

DEVELOPMENTS: Eastern end of Parkeston Quay to be lengthened in due course to provide more container berths.

GANGWAY/DECK WATCHMEN: Watchmen are not provided or required by the port, but ships may use their own watchmen.

OPENING/CLOSING HATCHES: To be carried out by ship's crew.

CARGO GEAR: There are 8 level luffing cranes, safe working load averaging from 3 tons to 10 tons, which can be used for discharging and loading. There are also 2 transporter cranes, 30 tons SWL.

IDENTIFICATION CARDS: Seaman's Identity Cards sufficient.

CONSULS: Dutch, German, Danish, Belgian.

REPAIRS: Minor repairs can be carried out by British Rail workshops at Parkeston Quay. As much advance notice as possible required.

REPATRIATION: All facilities available.

AIRPORT: Nearest is Ipswich, 22 miles; Southend, 70 miles.

HOLIDAYS: All normal Bank Holidays. Only passengers and car travellers are dealt with at Parkeston Quay on these days. Freightliners sail only if loaded before the holiday. Train ferries operate normal services.

POLICE/FIRE/AMBULANCE: Dial 999 and ask for service required.

TELEPHONES: Arrangements can be made, with advance notice given.

AUTHORITY: General Manager and Harbour Master, Harwich Harbour Conservancy Board.

HEYSHAM: 54.02 N. 02.55 W. (See Plan Book)

DOCUMENTS: As for other British ports plus Walney Light Dues.

PILOTAGE: Trinity House Pilotage Service, Barrow District. Compulsory for all vessels of 50 tons gross tonnage and over with the exception of vessels of not more than 1,500 tons gross regularly employed in the home and coasting trades and not carrying passengers. Also see "Barrow-in-Furness".

RADIO: Heysham Harbour Radio, VHF Channels 16 and 14.

MAX. SIZE: 480 ft. (146 m.) length, draft 17 ft.

HEALTH: See "Health – All Ports" before first UK port.

TUGS: None available.

ANCHORAGES: Heysham Lake. 0.5 mile N.W. of No. 1 Buoy. Position: 53° 59′.4 N., 3° 00.0′ W. Depth: 40 ft. at low water.

RESTRICTIONS: Entry possible at all states of tide. Harbour maintained at 4.1 m. below Admiralty chart datum of chart No. 2010.

BERTHING: Vessels may be berthed at any time. 1 Roll-on/Roll-off ramp. 2 Lift-on/Lift-off berths.

CRANES: 1×30 ton portal crane; 1×10 ton portal crane; 1×32 ton Scotch Derrick on North Quay; 4×7.5 ton portal cranes on South Quay.

DENSITY: Salt water.

FRESH WATER: Available from the quays.

FUEL: Gas oil by road vehicle.

GANGWAY/DECK WATCHMEN: Ship's watchmen required.

SHORE LEAVE: No restrictions on landing.

AIRPORT: Nearest, Liverpool and Manchester; 60 Miles.

REPAIRS: Small repairs possible, no docking facilities.

PROVISIONS: Available locally.

POLICE/AMBULANCE/FIRE: Telephone 999 in emergency.

AUTHORITY: Shipping and Port Manager, British Rail.

HOLYHEAD: 53.19 N. 04.41 W. (See Plan Book)

DOCUMENTS:

1 Crew List and where applicable a Passenger List.
1 Pratique issued by Customs.
1 Crew Declaration (C.142 for H.M. Customs).
1 List of Consumable Stores (tobacco, snuff, alcohol).
1 Declaration of Health.
1 Cargo Manifest.
1 Ship's Report.

PILOTAGE: Pilotage compulsory under Trinity House Authority. Local Pilot available on request.

ANCHORAGES – PROHIBITED ANCHORAGE: The breakwater affords partial shelter to the outer anchorage and complete protection to New Harbour; there are depths of from 19 to 42 ft. in the former and of from 17 to 40 ft. in the latter.

The accommodation for vessels of deep draft in New Harbour is limited. Small vessels should always proceed into New Harbour and anchor in the S.W. part, leaving the outer part and the roadstead for large vessels. The bottom is hard, overlaid with mud but the holding ground is sufficiently good if an adequate amount of cable is veered. During Easterly winds an uncomfortable sea is raised; vessels may then obtain shelter in the Eastern part of outer anchorage. Anchorage is prohibited within 1.5 cables on either side of the track followed by Mail Steamers from the head of the breakwater to the entrance to Old Harbour; the limits of this area are shown on charts.

MAX. SIZE:

Inner Harbour is restricted to vessels of 15 ft. draft and vessels exceeding this draft will only be accepted after consultation with the Shipping and Port Manager.

Outer Harbour: Vessels of approximately 60,000 tons can be accepted alongside the Anglesey Aluminium Jetty where the berth is dredged to 46 ft. at MLWS.

HEALTH: See "Health – All Ports" before first U.K. port.

TUGS: Available through Agents. Tugs up to 1,375 h.p.

RADIO: Holyhead Radio, VHF Channel 16, No Port Radar.

BERTHING: By prior arrangement with Shipping and Port Manager.

STEVEDORES: No stevedores. Vessels loaded and discharged by British Railways dock porters. Outside vessels berthing at Public Quay can be discharged and loaded by making prior arrangements with Agent.

MEDICAL: Medical Officer available. Stanley Sailors Hospital situated in close proximity to Harbour.

DENSITY: Salt water (1025).

FRESH WATER: Available at all berths within the Inner Harbour and alongside Anglesey Aluminium Jetty.

FUEL: Fuel oil and diesel oil available provided that adequate warning is given to Agent. Only 1 berth available for bunkering of large vessels of deep draft alongside Anglesey Aluminium Jetty.

Prior arrangements must be made with British Rail in conjunction with Anglesey Aluminium Metals Ltd., telephone Holyhead 3333.

No oiling barge available for bunkering vessels at anchor.

GANGWAY/DECK WATCHMEN: Required at all times when vessels are in port.

REPAIRS: Repairs can be carried out by the British Rail (SISD) workshops, dry dock available:

Dry dock: Length 412 ft., breadth 70 ft. 3 in., depth on sill 20 ft. at Spring tides.

AIRPORT: RAF Station Valley, Anglesey (6 miles away).

HOLIDAYS: Saturdays, Sundays and all Public holidays.

POLICE/AMBULANCE/FIRE: Tel. 999.

TELEPHONES: No telephone connection for outside vessels. Public telephone within port limits.

SERVICES: Compass adjusting can be arranged.

SHORE LEAVE: Allowed.

AUTHORITY: British Rail Shipping and International Services Division.

HOUND POINT: 56.00 N. 03.22 W. (See Plan Book)

Vessel called at Hound Point Terminal for the purpose of loading Forties Crude Oil (North Sea Oil). The terminal is operated by B.P. Position of terminal Lat. 56° 00′ 20″ N., Long. 03° 21′ 45″ W.

DOCUMENTS:

1 Crew List.
1 Passenger List.
1 Crew's Effects List.
1 Stores List.
All valid Certificates.

PILOTAGE: Pilotage in Firth of Forth is compulsory. Contact "Forth Pilot" VHF Channel 16. Pilot boards large vessels in vicinity of Fairway Buoy 56° 03.5′ N., 03° 00′ W. as there is limited depth and manoeuvring space at normal Pilot boarding ground East of Inchkeith.

ANCHORAGE: When vessel has to wait for Pilot, berth or tide, "Forth Navigation Service" will assign anchorage which are numbered "A1" to "A4". These anchorages are in a line E.S.E. to S.W. of Fairway Buoy. Good holding ground at anchorages.

RESTRICTIONS: Vessels will be berthed at slack water — flood or ebb — only. The same accounts in most cases for unberthing.

MAX. SIZE: Vessels up to 300,000 d.w.t. can berth at Hound Point Terminal with no defined restriction on LOA. Vessels berth starboard side alongside, heading East.

HEALTH: See "Health – All Ports" before first U.K. port.

RADIO: *Arrival advice:* For advance notice refer to Charterer's instructions. In our case ETA was given to Agent upon sailing from Rotterdam.

RADIO/VHF: Estuary radar service. VHF contact can be made with Forth Navigation Service Channel 16. Hound Point Terminal operates VHF Channel 16; B.P. Grangemouth VHF Channel 16 (calling) and Channel 19.

TUGS: 4 tugs of about 3,000 h.p. each available. Tugs ropes are used.

BERTHING: Hound Point Terminal is a Sea Island in the Firth of Forth about 13 miles from Fairway Buoy. The approach channel from Fairway Buoy to berth is marked by buoys and has a guaranteed minimum depth of 66 ft. at LWST.

Maximum of 4 loading arms of 16 in. available for deballasting and/or loading. Loading rate about 8,000 t.p.h. by gravity and with 2 arms connected. This rate decreases as tank level drops.

When 4 arms are connected loading rate can be as high as 18,000 t.p.h. by means of booster pumps.

Facilities to receive any amount of dirty ballast are available. Discharge through 16 in. loading arms into 24 in. line with minimum of 5 kg/sq.cm. back pressure.

No need to prepare ship's derricks unless stores are taken on board. API of cargo about 36.7.

DENSITY: 1020 – 1025.

TIME: GMT in Winter. GMT plus 1 hour in Summer.

GENERAL: Outside the Firth of Forth, clear of the land on the South side, streams are weak, spring rate up to 1 knot, but at spring tide the velocity at the terminal is up to 3.5 knots (Refer to Tidal Stream Atlas).

AUTHORITY: Forth Ports Authority, Leith.

HULL: 53.44 N. 00.14 W. (See Plan Book)

DOCUMENTS:

1 Maritime Declaration of Health.
1 Crew's Effects List.
2 Ships Report by Master.
1 Home Office Form 1B6.
1 Stores List.
1 Certificate of Deck Cargo Tonnage.
1 Grain Certificate.
1 Light Certificate.
1 Port Dues Certificate.
1 Passenger List.
1 Landing card for each passenger.
Ships Certificate of Registry.
Mercantile Marine Office Certificate – for British Ships only.
Load Line Certificate.
Safety Equipment Certificate.
Lloyds Certificate.
Derat Certificate.
Ships Register.
Light Bills.
Safety Radio Certificate.

In addition Manifests and Bills of Lading are usually sent to Agents direct from the loading Port.

PILOTAGE: Compulsory. Humber Pilotage District – Spurn Pilot Station. A Pilotage Control and Radar Station (telephone no. 096-46-392; telex no. 527393) has been established on the Spurn Peninsula in a position Lat. 53° 34′ 29″ N., Long. 00° 06′ 48″ E.

The station is manned at all times with a Pilot Master in attendance and vessels bound to the Humber requiring the services of Humber Pilots must give advance notice by signal through a GPO Coast Station to the Spurn Pilot Station giving ETA at the seaward limits of the Humber Pilotage District, draft, and destination at least 12 hours in advance. Any adjustment to the time should be given at least 2 hours before arrival.

Vessels wishing to communicate direct with the Spurn Pilot Station by VHF radio telephony may if within VHF range (approximately 20 miles) call "SPURN PILOT" on VHF Channel 16 and after contact transfer to Channel 14 for passing messages. (Note: Attempts to establish communication on VHF at extreme range can cause unnecessary interference).

Inward bound vessels for Goole or the River Trent desiring to pick up Goole or Trent Pilots in Hull Roads should give at least 2 hours advance notice of their expected time of arrival in Hull Roads by signal through a GPO Coast Station to the Humber Ports Operation and Information Service (Telegraphic address "HUMBEROPS") or should immediately on arrival at Spurn report their expected time of arrival in Hull Roads by calling the above service ("HULL RADIO") on VHF Channel 16 then transferring to Channel 12 for passing arrival information.

ANCHORAGES: The undermentioned anchorages have been designated for the use of sea-going vessels. Masters are asked to co-operate by using these anchorages and to avoid anchoring in the Fairway or elsewhere.

Spurn anchorage should normally be used by inward-bound vessels and Bull anchorage by outward-bound vessels and vessels awaiting a berth.

Spurn Anchorage. From position "A" 121° distant 3.65 miles from Spurn Lighthouse, in a 125° direction 1.60 miles; thence in a 020° direction 0.60 mile; thence in a 077° direction 1.00 mile; thence in a 347° direction 0.70 mile; and thence in a 257° direction 2.40 miles to position "A".

Haile Anchorage (Explosives): From position A, 216° distant 2.18 miles from Spurn High Lighthouse in a 284° direction 0.77 mile; thence in a 139° direction 0.80 mile; and thence in a 027° direction 0.46 mile to position A.

Bull Anchorage. From Position "A", 193° distance 2.1 miles from Spurn High Lighthouse, in a 090° direction 1.96 miles thence in a 294° direction 1.76 miles, thence in a 274° direction 0.93 miles, thence in a 206° direction 1.0 miles, thence in a 116° direction 0.88 miles, thence in a 026° direction 0.55 miles to Position "A".

AIRPORT: Nearest is Leeds/Bradford, approx. 60 miles from docks.

RESTRICTIONS: Vessels may be accepted through the day and night, the only restrictions being influence of tides, together with the undermentioned physical limitations. Although vessels may occasionally be penned into or out of the docks outside the HW period it is more usual for them to be handled during the period immediately prior to and following HW.

MAX. SIZE: The maximum permissible dimensions for a general cargo/bulk carrier vessel (excluding tankers) requiring a berth in the enclosed docks are as follows: King George & Queen Elizabeth Docks, length 630 ft., beam 80 ft., draft 33 ft. 6 in.

HEALTH: Pratique granted by Customs Authorities after berthing. If vessel from non-infected area pratique given after Master declares all well on board. If from infected area pratique given after Port Health Authorities doctor has examined crew and given health clearance to Customs Officer. In case of suspected illness Master can send radio to Port Health Authority – telegraphic address "Portealth" Hull. Pratique is automatic when entering after calling at another port or ports in the U.K. and being granted pratique there, unless of course, illness has developed whilst on passage from previous U.K. port.

Also see "Health – All Ports" before first U.K. port.

RADIO: Portishead Radio – call sign GKL but when within 200 miles of the Humber can go through Humber Radio – call sign GKZ.

VHF: Humber Ports Operation and Information Service.

The Humber Ports Operation and Information Service operates a VHF (FM) radio telephone service available to all vessels navigating the Rivers Humber, Ouse and Trent from the Humber Pilot Office Building, Queen Street, Hull.

A continuous watch is maintained on Channels 16 and 12. The call sign is "Hull Radio". The Telephone Number is Hull (0482)–223999. Telegraphic address "Humberops".

The Service provides information regarding the arrival, berthing, anchoring and departure of vessels and also information on navigational aids, navigation generally, visibility, and the safety of vessels and persons. Tidal information, including the height of tide at Bull Sand Fort and at Immingham in the Lower Humber, is also available on request. Messages of any other nature and messages of a personal character cannot and will not be accepted. Messages of this kind should be passed through the Post Office Ships Telephone Service via "Humber Radio" on Channel 26.

Other VHF (FM) Stations situated on the River Humber and the Channels used are shown below. These Stations provide direct communication between a vessel and the Dock or Pier Master at the place of destination. In general, vessels should obtain their navigation and safety information from the Humber Ports Operation and Information Service and their berthing, docking and other pre-arrival information from the Station serving their destination.

A general broadcast giving weather reports, tidal information and navigational warnings is made by the Humber Ports Operation and Information Service on Channel 12 every 2 hours commencing at 0103 hrs., prior notification being given on Channel 16.

Procedure:

(i) Vessels fitted with appropriate VHF R/T equipment on approaching the Humber should set watch on Channel 16.

Station	*Call Sign*	*Channel Nos.*	*Operational Times*	*Remarks*
BRITISH TRANSPORT DOCKS BOARD				
Hull Ports Operation and Information Service, Pilot Office, 50 Queen Street, HULL	"Hull Radio"	16 12	Continuous watch maintained	Calling and safety. Port Operations and Information.
Grimsby Docks	"Grimsby Docks Radio"	16 18 9	Continuous watch maintained	Calling and safety. Docking instructions for Grimsby Docks. Short range berthing instructions.
Immingham Docks	"Immingham Docks Radio"	16 19 22 9	Continuous watch maintained	Calling and safety Berthing instructions for tankers. Docking instructions for Immingham Docks. Short range berthing instructions.
Saltend Jetties	"Saltend Radio"	16 19	Continuous watch maintained	Calling and safety. Berthing instructions for tankers.
King George Dock	"King George Dock Radio"	16 20	Continuous watch maintained	Calling and safety. Docking instructions for King George Dock.
Alexandra Dock	"Alexandra Dock Radio"	16 5	5 hours before HW Hull until 3 hours after HW Hull	Calling and safety. Docking instructions for Alex. Dock.
Blacktoft Jetty	"Blacktoft Jetty Radio"	16 14	3.25 hours before HW Goole until 0.75 hour after HW Goole	Calling and safety. Port Operations and berthing instructions for Blacktoft.
Goole Docks	"Goole Docks Radio"	16 14	Continuous watch maintained	Calling and safety. Port Operations and docking instructions for Goole.
Killingholme Signal Station	"Killingholme Radio"	21	Continuous watch maintained	Trawler operations.
CRUDE OIL TERMINALS (HUMBER) LIMITED (Operated by Conoco, Ltd.)				
Tetney Oil Terminal	"Tetney Base"	16 19 48	Continuous watch maintained	Calling and safety. Berthing instructions for Mono-Mooring Buoy.
SPURN SHIPPING COMPANY LIMITED	"Oil Base"	16	Continuous watch maintained	Short range berthing instructions for Immingham Oil Terminal.
HULL CORPORATION				
River Hull Port Operational Service	"Drypool Radio"	16 14	2 hours before HW Hull until 1 hour after HW Hull, Mon. to Sat.	Calling and safety. Port Operations in River Hull.
			0900–1100 hrs. Sat. irrespective of tide.	Inter ship use.

(ii) Vessels wishing to communicate with the Pilot Station should call "Spurn Pilot" on Channel 16 and shift to Channel 14 for exchange of traffic.

(iii) On entering and before sailing or moving in the Humber, vessels should call "Hull Radio" on Channel 16. When contact is established they will be requested to transfer to Channel 12 for exchange of arrival or departure information. Watch should then be resumed on Channel 16, unless requested to remain on Channel 12 for port operational reasons.

(iv) Vessels wishing to communicate with the Station serving their destination should do so at the appropriate time on the Channels shown in the Appendix, reporting their departure from Channel 16 to "Hull Radio". Vessels are advised that, when communicating with these Stations, contact with the Humber Ports Operation and Information Service can only be re-established through Channels 16 and 12 and it is particularly advisable to maintain a listening watch on Channel 16 whenever practicable in the event of unforeseen circumstances developing in the River.

All times in messages should be given in Local Time using the 24 hour notation.

TUGS: Head boat normally joins vessel in vicinity of Saltend, about 2 miles from dock, and the other tug or tugs connect with vessel when approaching the dock. Where vessel supplies own ropes for towage these to be good stout hawsers. Wire ropes will not be accepted. There is a charge for use of tug's hawsers.

BERTHING:

	Entrance lock		*Depth of water*			
	Length	*Width*	*at MHWS*		*at MHWN*	
	ft.	*ft.*	*ft.*	*in.*	*ft.*	*in.*
King George Dock	750	85	42	0	37	1
Alexandra Dock and	550	85	33	4	28	5
extension		70	33	4	28	5
Albert and William Wright Docks	320	80	28	1	23	2
			at MLWS			
Salt End Jetty Number 1	tidal		35	0		
Salt End Jetty Number 3	tidal		35	0		

BULK HANDLING FACILITIES: Container terminal at Queen Elizabeth Dock equipped with 2 transporter cranes, one 40 tons and one 35 tons capacity and 8 straddle carriers.

Roll-on/roll-off container services operated from King George, Queen Elizabeth and Alexandra Docks. Grain silo of 60,000 tons capacity.

STEVEDORES: Enable Agent order gangs important receive accurate ETA particularly when week-end work involved. Latest time to order gangs: Normal day work 0730 hrs. same morning. Saturday and Sunday 1100 hrs. Friday.

MEDICAL: Necessary for Agents to be advised of any urgent cases of illness in order that they can arrange for a doctor or if necessary an ambulance to be available immediately on berthing. Hospital facilities available.

If vessel required to remain in river awaiting berth arrangements can be made for any serious case to be taken from vessel by lifeboat and conveyed to Grimsby for immediate treatment.

TANKERS: The Oil terminal at Salt End handles refined or semi-refined chemical and petroleum products which are transferred from the vessel along the oil jetties through a series of chemical and service pipes which range from 4 in. for chemicals, 8 in. and 12 in. for spirit and 16 in. for fuel oils and molasses. Facilities available for the discharge of Slop residue.

There are 3 tanker berths at Salt End and maximum dimensions of vessels are length 670 ft., draft 34 ft.

DENSITY: 1013/1015.

FRESH WATER: King George and Queen Elizabeth Docks. Available at any time. Ex Quay. Rate of delivery – 15 t.p.h.

All other Docks. Available at any time. Ex Water Boat. Rate of delivery – 100 t.p.h.

If water required urgently after 1700 hrs. weekdays or on Saturdays or Sundays Agents must be notified in good time to enable them order men out.

FUEL: Fuel oil available, viscosity up to 3,500 secs. Redwood. Gas oil and diesel also available. At least 24 hours notice required.

FIRE PRECAUTIONS: Copy of Handbook "Emergency Arrangements" is handed to Masters of Tankers.

GANGWAY/DECK WATCHMEN: Watchmen available if required by Master.

OPENING/CLOSING HATCHES: Can be carried out by stevedores when ordered. Ship charged with actual cost, but ship's crew may do so if required.

CUSTOMS ALLOWANCE: Foreign trade – max. allowance 0.5 lb. cigarettes or cigars or tobacco. Home Trade – (Elbe/Brest limits) half the above. Wine and/or Spirits. Foreign Trade – 1 pint – opened. Home Trade – (Elbe/Brest limits) half the above allowance.

CONSULS:

	Tel.		*Tel.*
Belgium	0482 27464	Liberia	0482 224151
Bolivia	0482 27301	Netherlands	0482 224911
Denmark	0482 26081	Norway	0482 224151
Finland	0482 25781	Portugal	0482 28052
France	0482 27464	Spain	0482 23096
Germany	0482 25781	Sweden	0482 26081
Greece	0482 224151	Thailand	0482 29925
Iceland	0482 41325	S.T.D. Code for Hull 0482	

CARGO GEAR: When working with ship's gear a Register of Machinery, Chains and Wire Ropes, etc., with all Test Certificates and record of inspections to be produced to the stevedores before work commences.

REPAIRS:

Facilities available for all types of deck and engine repairs.

DRY DOCKS:

Largest Dock – King George No. 2.

Length at cope level.		568 ft. 3 in.
Length on blocks.		520 ft.
Width at cope level.		92 ft.
Width at entrance.		72 ft.
Depth of water on sill HMWS		27 ft. 11 in.
Depth of water on sill MHWN		23 ft.
Depth of water on block at entrance.	MHWS	29 ft. 2 in.
	MHWN	23 ft. 6 in.

One further dock in King George Dock. Two further docks in Alexandra Dock. One further dock in Wm. Wright Dock.

AIRPORT: Humberside Airport. Daily service to Amsterdam, Aberdeen and London.

REPATRIATION: Crew changes can be effected and repatriation arranged by sea or air.

TIME: BST (British Standard Time) GMT plus 1 hour, GMT during winter months.

HOLIDAYS: Good Friday (movable Holiday); Easter Monday (movable Holiday); Spring Holiday (last Monday in May); Bank Holiday (last Monday in August); Christmas Day (25th December); Boxing Day (26th December).

Saturdays and Sundays are non-working days but overtime work can be arranged on a voluntary labour basis. Overtime work can be arranged on all the above holidays on a voluntary labour basis.

POLICE/AMBULANCE/FIRE: Emergency Calls – Police – Fire – Ambulance – Coastguard – Dial 999. Ask the operator for the service required.

TELEPHONES: Can be placed on board at the majority of berths in King George and Queen Elizabeth Docks.

SERVICES: Tank cleaning, facilities for discharge of tank washings slop (residue), compass adjusting, etc., available.

SHORE LEAVE: Crew members allowed ashore.

AUTHORITY: British Transport Docks Board.

IMMINGHAM and KILLINGHOLME:

53.37 N. 00.12 W. **(See Plan Book)**

DOCUMENTS:

2 Copies Immigration, Crew and Passenger List, H.O. Form I.S.6 Supplied by Agents.

Form C.13 General Declaration (In duplicate).
Form C.14 Ship's Stores (In triplicate).
Form C.142 Crew Declaration (In duplicate).
Form C.143 Small Parcels List. (1 Copy) if appropriate.
Form D.C.1 Self Declaration Deck Cargo (In duplicate).
1 Copy Cargo Manifest.
1 Copy Dangerous Cargo List.

PILOTAGE: Compulsory.

Humber Pilotage District – Spurn Pilot Station: A Pilotage control and radar station (telephone no. 096-46-392; telex no. 527393) has been established on the Spurn Peninsula in a position Lat. 53° 34′ 29″ N., Long. 00° 06′ 48″ E.

The station is manned at all times with a Pilot Master in attendance and vessels bound to the Humber requiring the services of Humber Pilots must give advance notice by signal through a GPO Coast Station to the Spurn Pilot Station giving ETA at the seaward limits of the Humber Pilotage District, draft, and destination at least 12 hours in advance. Any adjustment to the time should be given at least 2 hours before arrival.

Vessels wishing to communicate direct with the Spurn Pilot Station by VHF radio telephony may if within VHF range (approximately 20 miles) call "SPURN PILOT" on VHF Channel 16 and after contact transfer to Channel 14 for passing messages.

(Note: Attempts to establish communication on VHF at extreme range can cause unnecessary interference).

Inward bound vessels for Goole or the River Trent desiring to pick up Goole or Trent Pilots in Hull Roads should give at least 2 hours advance notice of their expected time of arrival in Hull Roads by signal through a GPO Coast Station to the Humber Ports Operation and Information Service (Telegraphic address "HUMBEROPS") or should immediately on arrival at Spurn report their expected time of arrival in Hull Roads by calling the above service ("HULL RADIO") on VHF Channel 16 then transferring to Channel 12 for passing arrival information.

Compliance with this procedure will ensure, as far as possible, the shipping of Pilots without delay.

ANCHORAGES: Hawke and Sunk Roads – Spurn and Bull anchorages. The Pilot station will advise where to proceed to anchor and also provide Pilot. See "Hull".

RESTRICTIONS: No restrictions, vessels may enter the harbour day or night. Max. draft for entering harbour 34 ft. H.W. Compulsory Pilots boarding Spurn Light-vessel, decide whether vessel shall proceed up river or anchor and await suitable state of tide.

MAX. SIZE: Also see "Tetney Terminal".

Immingham Dock max. length 650 ft., breadth 86 ft., draft 34 ft. on density 1010.

National Coal Terminal, length no restriction, beam no restriction, draft average 30 ft. Also see "Berthing and Tankers".

HEALTH: Master to report any "Reportable" illness as detailed in form "Port 38" to "Porthealth Immigration". See "Health – All Ports" before first U.K. port.

RADIO: Humber Radio – 2182 kc/s. or VHF Channel 16. Dock Master VHF Channel 16. Tankers use Channel 19.

VHF: See "Hull".

TUGS: Will join vessel off dock entrance, optional use of tow lines. If using tug's tow lines, charge for this service, depending on vessel's length.

BERTHING: Unless Master or Agent indicates preference, the Port Authorities will decide which side alongside. River Pilot deciding in conjunction with Dock Master most suitable berthing time for harbour and river installations.

British Steel Corporation Ore Terminal:

Adjoins N.C.B. Terminal. Max. length 1,095 ft., max. draft subject to approach channel, 39–43 ft.

CRANES: 24 electric cranes 3–10 tonnes capacity and 1 electric derrick 32 tonnes capacity.

STEVEDORES: Firm ETA to Agent required if possible before noon on previous day before arrival.

MEDICAL: No advance notice necessary for medical treatment as all hospital facilities available.

TANKERS: Also see "Tetney Terminal".

Immingham Oil Terminal. Up to 280,000 d.w.t. with part cargo conducive with Humber dredged channel. Length up to 1,100 ft., breadth, no restriction, draft depends on height of water in channel, average 43 ft. Three 12 in. lines for crude oil. Two lines 12 in. and 10 in. all other products. One 8 in. line for bunkers.

Eastern Jetty. Max. Length approx. 650 ft. breadth, no restriction, draft depends on low water, average around 33 ft. 10 in., 8 in., 6 in. lines, depends on Receivers. Bunker line available.

Western Jetty. Max. Length approx. 800 ft. breadth, no restriction, draft depends on low water, average around 31 ft.

Killingholme North. Length 580 ft. max., beam, no restriction, draft 30 ft. 6 in. One 8 in. line. One 4 in. bunker line.

Killingholme South. Length 565 ft. max., beam, no restriction, draft 31 ft. One 8 in. line. Bunker line available. No slop tanks available.

DENSITY: In harbour 1010.

FRESH WATER: Available all berths by hose. Rate of delivery 20 t.p.h.

FUEL: 24 hours notice required. All grades available.

FIRE PRECAUTIONS: Copy of these regulations handed to the Master on arrival.

GANGWAY/DECK WATCHMEN: Watchmen not usually employed, but left to the discretion of the Master.

OPENING/CLOSING HATCHES: See "Grimsby".

CERTIFICATES:

Ship's Register.
Load Line.
Safety Radio.
Safety Equipment.
Safety Construction and any British Light Dues Receipts.
Derat Certificate.
Oil Pollution Certificate (Tankers).

CUSTOMS ALLOWANCE: 8 days – 200 cigarettes per person approx. Wine/spirits, 4 days – 0.25 pt. per day; this depends on the Customs Officer's discretion.

CARGO GEAR: This must comply with the Department of Employment and Productivity regulations. Normally discharge carried out by shore cranes, although overside berths available.

IDENTIFICATION CARDS: Seaman's book or passport sufficient for Crew members going ashore.

CONSULS:

Finland	Immingham 72387	Netherlands	Grimsby 43177
Denmark	Grimsby 57521	Norway	Grimsby 55324
Greece	Immingham 76246	Sweden	Immingham 72387

REPAIRS: All major repairs possible.

DRY DOCKS: 1. Length 225.6 m., width at entrance 17.1 m.
2. Length 182.9 m., width at entrance 27.4 m.

REPATRIATION: All facilities exist for dealing with crews and passengers.

AIRPORTS: Humberside Airport for Amsterdam, Aberdeen and London for International destinations.

TIME: GMT. Summertime, GMT plus 1 hour.

HOLIDAYS: Good Friday, Christmas Day, Boxing Day are regarded as closed holidays. All other holidays work will be carried out.

POLICE/AMBULANCE/FIRE: Police; Docks – Immingham 72414, 72068, 72067; County – Immingham 76444. Ambulance; – County – Cleethorpes 62912. Fire; 999 ask for Fire.

TELEPHONES: Public telephones available.

AUTHORITY: British Transport Docks Board.

AGENT: See "Grimsby".

INVERGORDON: 57.41 N. 04.10 W. (See Plan Book)

DOCUMENTS: *At Boarding on arrival:*

1 copy Maritime Health Declaration and Deratisation Exemption.
Lists C.142 – Crew's declaration of dutiable and prohibited goods obtained abroad or during the voyage.
Form I.B.6 – List of members of the crew who are aliens or who were engaged outside the United Kingdom.
List 142.A – Parcels list – small packages of merchandise and addressed packages not borne on the ship's report.
List of ship's surplus stores and live animals on board.
Account of cargo in unregistered spaces (deck cargo) if arriving from a port outside Home Trade limits.

At Customs House when making report:

Form XS1.3 (in duplicate) – Master's report inwards. (A third copy is required if the vessel is carrying cargo for another United Kingdom port or for export.)
Surveys 107 – grain-laden ships only.
Surveys 104 – if carrying deck cargo from outside Home Trade limits.
Forms PR.4, PR.8 or PR.10 – passenger returns in duplicate (1 copy for Customs 1 copy for Immigration). Vessels with passengers only.
Certificate of Registry.
Certificate of British Tonnage.
Light Dues Certificate relating to the vessel.
Certificate of Pratique; Form C.101 – these forms are issued by the Customs Officer who first boards the ship.

To the Agent:

Bills of Lading.
Cargo Manifests.

PILOTAGE: Pilotage not compulsory for Cromarty Firth except West of 04° 09' W. and to Admiralty Pier. Vessels under 300 g.r.t. are exempt. Cruising station of pilot boat is the Cromarty Lighthouse where Pilot will board. Pilot boat painted black hull, buff upper structure.

Approaching vessels may give their ETA to pilot station via VHF Channel 16, when in the vicinity of 30 miles, but a 24–hour notice will be required. In the event of bad weather, vessels will be guided by Pilot launch to safety where Pilot will board. Watch kept on VHF Channels 16 and 14 during normal office hours (at present) by Cromarty Firth Port Authority. Call sign "Cromarty Firth Base".

ANCHORAGES: In vicinity of Cromarty Bank Buoy and Cromarty Ness Light.

RESTRICTIONS: Vessels may enter between the hours 0600 and 2200 hours when Pilot will be available.

MAX. SIZE: Max. permissible length 800 ft., draft 36 ft. Also see "Berthing".

HEALTH: International quarantine signals to be used. Advise "Portelth Dingwall" in advance if any suspected diseases on board. Also see "Health – All Ports" before first U.K. port.

RADIO: Vessels approaching from North should pass their ETA cable via Wick Radio GKR 431, and vessels approaching from East via Stonehaven Radio GND 458 to their Agents.

VHF: Link calls through Cromarty Radio (based at Wick) Channel 16 and working Channel 28. Also see "Pilotage".

BERTHING: *Admiralty Wharf:* The wharf is the property of M.O.D. (Navy), however the berths are used regularly by commercial vessels.

Berths 1 and 2 (Outer South): Lengths 443 ft. Max. draft 36 ft. Max. LOA 800 ft. Also see "Tankers".
Berth 3: Max. draft 18 ft. Max. LOA 220 ft.
Berth 6: Max. draft 18 ft. Max. LOA 180 ft.

British Aluminium Pier: Outer Berth: Length 318 ft. Dredged depth 38 ft. M.L.W.S. (1974). Max. berthing length 900 ft. approx. using dolphins. (50,000 d.w.t.)

Inner Berth: Length 200 ft. Depth 20 ft. M.L.W.S. (1974).

CRANES: Mobile cranes up to a maximum 50 tons available from stevedoring firm.

TUGS: Caledonian Towage Co. Ltd. – Tel: Invergordon 852345 – suitable tugs stationed at the port which work in conjunction with Pilots. Tug's lines used.

STEVEDORES: James Jack (Stevedores and crane hirers) – Tel: Evantown STD (0349–83) 388/9. F. Lyons (Stevedores and crane hirers) – Burghead 360.

MEDICAL: Medical cases can be dealt with at short notice through local Agent. Hospital facilities available.

TANKERS: Vessels up to 800 ft. Max. draft 36 ft. may use Admiralty Wharf, Berths 1 and 2 combined.

DENSITY: 1022.

FRESH WATER: Obtainable alongside quay. Rate of delivery 50 t.p.h., each hydrant.

FUEL: This can be ordered through local Agent, delivery by road tanker, small quantities, notice required.

GANGWAY/DECK WATCHMEN: Gangways supplied free of charge with vessel responsible while on board. Watchmen supplied by ship's personnel.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CERTIFICATES: The following Certificates are required to be held on board for production when required:

International Load Line Certificate.
Safety Construction Certificate
Safety Equipment Certificate.
Safety Radio Certificate.

CUSTOMS ALLOWANCE: Following quantities are generally left out for use on board by each member of crew:

Ships arriving from foreign ports within Home Trade Limits: Tobacco 125 gms. (4oz. or 100 cigarettes). Spirits 0.185 litre (0.25 bottle), wine 0.375 litre (0.5 bottle).

All other ships from foreign ports: Tobacco 250 gms. (8 oz. or 200 cigarettes). Spirits 0.375 litre (0.5 bottle), wine 0.75 litre (1 bottle).

IDENTIFICATION CARDS: Not required.

REPAIRS: General repairs undertaken by Cromarty Firth Engineering Co. Ltd. – Tel: Evanton 291/551.

REPATRIATION: Can be arranged.

AIRPORT: Dalcross Airport at Inverness, operated by British Airways, distance from Invergordon 45 miles.
TIME: British Summer Time, 1 hour advanced on GMT. GMT in Winter months.
HOLIDAYS: 1st and 2nd January; 2nd Monday April; Last Monday July; 1st Monday October; Christmas Day.
POLICE/AMBULANCE/FIRE: Police, tel. Invergordon 852222 or dial 999; Ambulance, arrangements through local doctor, tel. Invergordon 852522; Fire Station, dial 999 and ask for their service.
TELEPHONES: H.M. ships only.
SHORE LEAVE: Allowed.
GENERAL: Permit must be obtained from Port Authority or Ministry of Defence when burning or welding is to be carried out.
AUTHORITY: Cromarty Firth Port Authority.

INVERNESS: 57.29 N. 04.14 W.

DOCUMENTS:
2 Crew Lists.
2 Passenger Lists.
Customs and Excise and Health Documents.
Manifest.
Bills of Lading, etc.
PILOTAGE: Apply direct to Agent or to Pilot, telephone Kessock 217. ETA 24 hours. Pilot equipped with VHF. Pilot cutter blue launch with letter P. Pilot station Munlochy Buoy. Location of anchorage while awaiting Pilot – Munlochy Buoy.
ANCHORAGES: Munlochy Buoy in 5–8 fathoms. Beauly Basin in 15 fathoms. Munlochy Bay in 5 fathoms.
RESTRICTIONS: Vessels may enter and leave from 2 hours before HW until 2 hours after HW.
MAX. SIZE: Ship max. 300 ft. length, 20 ft. draft, high water springs. 18ft. draft, high water neaps
HEALTH: See "Health – All Ports" before first U.K. port.
RADIO: Wick Radio.
TUGS: None.
STEVEDORES: Arrange through Agent. 24 hours notice required.
MEDICAL: Doctor available.
DENSITY: 1012.
FRESH WATER: Available on demand, 20 t.p.h., ex hose on quay.
FUEL: Marine diesel and petroleum on request.
GANGWAY/DECK WATCHMEN: Supplied by ship.
OPENING/CLOSING HATCHES: Done by crew.
CUSTOMS ALLOWANCE: Tobacco/Wines/Spirits. Usual amount allowed by Customs and Excise.
IDENTIFICATION CARDS: None.
CONSULS: Netherlands, tel. Inverness 31171.
REPAIRS: Thornrush Slipway Tel. 33813.
REPATRIATION: Facilities available.
AIRPORT: Dalcross, 7 miles from Inverness.
HOLIDAYS: 1st and 2nd January; Easter Monday; July Bank holiday; First Monday in October; and Christmas Day. All official holidays, cargo work can be arranged on these days.
POLICE/AMBULANCE/FIRE: Police Inverness 39191; Fire Brigade Inverness 222722; Ambulance Inverness 31511.
TELEPHONES: On Quay.
SHORE LEAVE: Unrestricted.
AUTHORITY: Inverness Harbour Trust, Harbour Master.

IPSWICH: 52.02 N. 01.10 E. (See Plan Book)

DOCUMENTS: Masters can conclude all documentation in port. Ship's Agent will give the necessary advice.
PILOTAGE: Normal International signals for "I require Pilot", VHF Channel 16 calling, Channels 9 and 12 working. 30 ft. launch painted black, with word "Pilot" in white on side, available at Sunk and Cork Light Vessels or Harwich Harbour. Desirable that Agents are advised of vessel's ETA at least two hours prior to vessel's arrival at Harwich Roads or, at the Master's option, at either the Sunk or Cork Pilot stations.

A new pilot station has been established in the Orwell Navigation Centre at Ipswich Dock head. The station will be manned from 0700 till 1900 hrs. by a duty Pilot, telephone Ipswich 211347, who will receive orders, and requests for information, regarding the pilotage of vessels in the Ipswich pilotage district.

Outside these hours, from 1900 until 0700 hrs. each day, all such orders and requests for information should be passed to the Orwell Navigation Centre. Telephone 55093, for onward transmission to the duty Pilot at home.
ANCHORAGES: No anchorages within port. All vessels will proceed direct to berth, otherwise anchorage provided in Harwich Harbour.
RESTRICTIONS: Vessels up to 1,500 g.r.t. taken up at night, draft not exceeding 16 ft. Max. length of vessel 460 ft. Max. draft 25 ft. 6 in. Large vessels navigate on flood tide only.
Night Navigation:

Vessels of up to 300 ft. length can navigate at any time providing the U.K.C.* is observed.

Vessels between 300 ft. and 360 ft. in length can navigate (providing the U.K.C. is observed) on a flood tide only. The deadline will be HW at Harwich.

Tankers of over 260 ft. in length will also not be allowed to navigate during darkness. Chemical tankers are also restricted to daylight navigation only.

*U.K.C.: Under Keel Clearance.

MAX. SIZE: 460 ft. overall length and 25 ft. 6 in. draft.
HEALTH: See "Health – All Ports" before first U.K. port.
RADIO: Masters to contact ship's Agent through North Foreland, Humber, Niton or Portishead depending on position of vessel. All these radio stations hold cable addresses and staff telephone numbers of Agents.

A 24 hour VHF radio facility has been established. Vessels arriving should contact "Ipswich Port Radio" on VHF Channel 16 on entering the River Orwell and report and/or maintain a listening watch as instructed. Channels 14 and 12 will be used for the passing of messages which should be restricted to the safety of navigation or persons.
TUGS: Tugs available in Harwich Roads and it is customary for tugs' lines to be used, for which there is, of course, an additional charge on the towage. It is advisable for vessels to give 4/6 hours' notice of arrival at Harwich Roads.
BERTHING: Vessels bound for berths in the Wet Dock should arrive off the lock two hours before high water.

Cliff Quay: Length: 3,250 ft (990 m.).

Depth of water alongside: 28 ft. (8.5 m.) below LWOST. Subject to silting.

Approach Channel: 19 ft. (5.7 m.) below LWOST.

Cranes: 15 portal jib cranes from 3.00 to 15.25 tonnes lifting capacity and one derrick crane capable of lifting 32.5 tonnes at 90 ft. (27.4 m.) radius, and 40 ft. (12.1 m.) outreach from the face of the quay.

Largest vessel which can be accommodated: 460 ft. (140.2 m.) overall in length, 25 ft 6 in. (7.7 m.) draft inwards, 24 ft. 6 in. (7.4 m.) outwards.

The Quay handles containers and heavy lifts up to 32.5 tonnes and is particularly well equipped to handle cargoes direct to and from both road and rail transport. The South end has been developed as a modern terminal for handling all types of general cargo, including containers, flats and palletised units. Spacious modern transit sheds, together with a container park, are sited conveniently behind this part of the Quay. Vessels up to 25 ft. 6 in. (7.7 m.) draft can be handled at the terminal.

West Bank Terminal: Stage 1 of this terminal provides (1) Container Berth 400 ft. (122 m.) in length dredged to 20 ft. (6.09 m.) alongside. (2) Roll-on/roll-off berth with a ramp 121 ft. (36.9 m.) long and 23 ft. (7 m.) carriageway capable of taking a 45.8 tonnes axle load. Water alongside 20 ft. (6.04 m.) at LWOST.

Two quayside portal cranes, one of 10 tonnes and one of 35 tonnes capacity and a 60 ft. (18.29 m.) 50 tonne weighbridge have been provided on Stage 1.

Stage 2A (under construction) will provide one 300 ft. berth, dredged to 20 ft. LWOST, and backed by 12 acres of land.

The Dock: The dock is situated within the town of Ipswich. It is some 26.25 acres (10.63 hectares) in extent and is approached by an entrance lock 300 ft. (91.4 m.) long by 50 ft. (15.2 m.) wide and ships up to 47 ft. 6 in. (14.4 m.) beam can be brought in.

The following are the depths on the outer sill: At HWOST, 23 ft. 6 in. (7.16 m.). At LWOST, 10 ft. (3.04 m.). At HWONT, 20 ft. 6 in. (6.25 m.). At LWONT, 12 ft. (3.65 m.).

Owing to the shape of the lock-pit modern vessels require the following clearances:

Beam	*Clearance*
40 ft. (12.19 m.)	3 ft. (0.91 m.)
42 ft. (12.80 m.)	4 ft. (1.22 m.)
45 ft. (13.71 m.)	5 ft. (1.52 m.)
48 ft. (14.63 m.)	5 ft. 6 in. (1.67 m.)

Inside, in addition to some 2,700 ft. (823 m.) of private quays owned by merchants having warehouses or mills adjoining, where small vessels can berth, there are the following quays owned by the Authority:

(i) *South West Quay:* This quay is 800 ft. (244 m.) in length with a depth of 19 ft. (5.79 m.) of water alongside at mean dock level. The quay is served by three modern 7.63 tonne portal electric travelling cranes and mobiles as required.

(ii) *Timber, Public Warehouse,* and *End Quays* total 940 ft. (286 m.) in length and have a depth of water alongside varying from 12 ft. (3.65 m.) to 20 ft. (6.09 m.). Public Warehouse Quay has transit shed and warehouse space behind the quay and is served by mobile cranes capable of lifting up to 5 tonnes.

(iii) *Tovell's Wharf* is a 600 ft. (183 m.) reinforced concrete quay with 22 ft. (6.70 m.) of water alongside. It is served by two 4 tonne and one 5 tonne electric travelling luffing cranes.

(iv) *Orwell Quay* is 775 ft. (236 m.) in length, with 18 ft. (5.48 m.) of water alongside and includes a combined container and roll-on/roll-off berth with a derrick capable of lifting 32.5 tonnes at 112 ft. (34.14 m.). Two transit sheds, with a floor area of 96,700 sq. ft. (8,983 sq. m.) are situated immediately behind the Quay apron together with further extensive covered and open areas.
STEVEDORES: Ship's Master normally advises his Agent of his ETA, disposal of cargo on board, and all relevant details. The Agent passes this information to Stevedores.
MEDICAL: All medical facilities available in port. Vessels requiring medical assistance on arrival should advise all details by radio telephone or on their ETA cables.
TANKERS: It is desirable that when Master of a tanker gives an ETA he also indicates the size of pipe-line, size of connection and discharging point in order that necessary arrangements can be made at discharging point of receiving oil terminal. There are no slop facilities at port of Ipswich, and all cleaning and gas-free operations must be carried out outside precincts of the Harwich Harbour Conservancy Board. Only one tanker berth at Ipswich but

there are six intake points on quay and it is usual for four coastal tankers to be accommodated, depending on the overall length and berth availablity. A maximum draft on the berth of 25 ft. 6 in.

DENSITY: Approx. 1020 oz. depending on the amount of fresh water in river due to heavy rain.

FRESH WATER: Available at all quays. Delivery by hose through meter at 10 t.p.h.

FUEL:

Gas oil 35 secs. Redwood.
Light fuel oil 200 secs. Redwood.
Medium fuel oil heated 950 secs. Redwood.
Heavy fuel oil heated 3,500 secs. Redwood.
At least 24 hours' notice required.

GANGWAY/DECK WATCHMEN: No watchmen required by Port Authority, but sufficient men available at all times to move vessels, if necessary.

OPENING/CLOSING HATCHES: Hatches opened by ship's crew.

CERTIFICATES: Following certificates are required by Agents in order to arrange Customs clearance:

Ship's Register.
Radio Certificate.
Load Line Certificate.
Safety Equipment Certificate.
Derat Certificate.
British Tonnage Certificate, if required.

CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes, or equivalent in tobacco, per man. Wine and/or Spirits, One bottle per man.

CARGO GEAR: Cargo working gear is supplied by stevedores. Normally, quayside cranes are used for discharging and loading. In event of cargo gear being used in port, ship's gear certificate, duly certifying that all gear has been examined and is in every way workable and suitable for discharge and/or loading of cargo, is to be produced.

IDENTIFICATION CARDS: Not required as long as each crew member has in his possession a seaman's book and/or passport.

CONSULS: Vice-consul for Sweden and Vice-Consul for Norway. Tel. 59281.

REPAIRS: Only small repairs on board.

REPATRIATION: Facilities exist at port for effecting crew changing and arranging repatriation.

AIRPORT: A non-customed airport.

HOLIDAYS: Normal holidays for English ports.

TIME: GMT in Winter months. Summer time, GMT plus one hour.

POLICE/AMBULANCE/FIRE: In emergency dial 999. Otherwise Police – Ipswich 55811; Ambulance – Ipswich 56407; Fire – Ipswich 75345.

SHORE LEAVE: Allowed.

AUTHORITY: Ipswich Port Authority.

KING'S LYNN: 52.53 N. 00.15 E. (See Plan Book)

DOCUMENTS:

Pilot Note to be filled in and signed by the Master on completion of pilotage services both inwards and outwards.

Cargo tonnage return to be completed by the ship's Agent.

PILOTAGE: Pilotage is compulsory between an East-to-West line through Bar Flat Buoy in the Wash and the Freebridge at King's Lynn.

Vessels may be boarded and unboarded by pilot cutter in the Wash from approx. 2.5 hours before high water between Daseley Sled, the Sunk Buoy and Roaring Middle Light Float. Unless prevented by weather or breakdown a pilot cutter cruises between King's Lynn No. 1 Light Buoy and the Sunk Light Buoy approx. 2.5 hours before high water until such time as it is too late for a vessel to transit the Approach Channel on that tide.

Requests for a Pilot sent at least 24 hours before the service is required (with amendments if necessary up to 14 hours before) to the Pilot Office, Common Staith, King's Lynn (tel. King's Lynn 3411, telegrams "Conservator" King's Lynn) or through local Agent. The Pilot Office is at the Harbour Office and maintains VHF R/T watch on Channels 16 and 14 from 0900 to 1700 hrs. Monday to Friday and from 4 hours before high water until 1 hour after high water on each tide after 1700 and before 0900 hrs. The Pilot Cutter listens on Channel 16 when on station and is fitted with Channels 14, 12, 11 and 6 as working channels.

No. 3 and 4 Pilot Launches "Brackley" and "Denver" are 40 ft. fibre glass craft with blue hulls, white superstructure and orange tops to the wheelhouses. In the event of bad weather the pilot launch on duty will fore-run vessels into Daseley Sled (52° 53′ N. 0° 21′ 5″ S.) before boarding Pilots.

Requests for pilots for ships in port, should be made to the Pilot Office at least 2 hours before the Pilot is required to attend the ship. The signals to be used or displayed where the services of a pilot are required in accordance with the provisions of the Merchant Shipping (Pilot Signals) Order, 1970. Pilots are boarded and unboarded directly to and from the Pilot Cutter as conditions allow.

ANCHORAGE: In the Wash vessels anchor within an area bounded by the Roaring Middle Light Float and the King's Lynn No. 1 Light Buoy and the Sunk Light Buoy. Anchoring close to No. 1 buoy in sufficient depth of water assists early boarding of Pilots. Depth of water min. of 20 ft.

RESTRICTIONS: King's Lynn Harbour is situated on the River Great Ouse about 2 miles inland from its mouth, at the S.E. corner of the Wash.

The shipping channel in the approaches to King's Lynn and its approaches in the Wash is subject to changes in depth and direction as published on Admiralty Charts.

Harbour Master will advise in advance upon the suitability of vessels and tides. To navigate the approach channel with sufficient under-keel clearance over shoal areas, the vessel's max. draft plus 6 ft. should not exceed the height of the tide above dock sill.

All ship movements are at high water, times in accordance with a position list maintained at the Harbour Office on the basis of information supplied in advance from Masters of vessels and their Agents.

At the Docks entrance lock docking signals are exhibited from a signal mast. Gale warnings are exhibited from a signal mast on Common Staith.

MAX. SIZE: Max. dimension for vessels entering the Harbour: length 260 ft., beam 45 ft., draft 11 ft., on lowest neap tides, and 17 ft. on highest spring tides. Access over high tide only. Harbour Master to be consulted for vessels approaching these limits.

HEALTH: See "Health – All Ports" before first U.K. port.

RADIO: The King's Lynn Conservancy Board operates in the River Great Ouse and its approaches in the Wash a VHF (FM) port operations and information radio-telephone service in the International Maritime Band, call signs: "King's Lynn Harbour Radio" (Channels 16, 14, 12 and 11); "King's Lynn Pilots" (Channels 16, 14, 12, 11 and 6).

British Transport Docks Board operates a docks operations and information service, call sign: "King's Lynn Docks Radio (Channels 16, 14 and 11).

TUGS: Controlled by King's Lynn Conservancy Board and in attendance at the discretion of the Board's Harbour Master. Vessels joined in the Wash Approaches and/or lower reach of River Great Ouse (Marsh Cut). Vessels should provide own hawsers. If ordered, tug hawser available.

Harbour Master may require any vessel to use and employ a tugboat.

BERTHING: *Alexandra Dock:* Size 780 ft. × 440 ft. Approached from the River Great Ouse and King's Lynn Harbour by a lock 50 ft. wide and 200 ft. between gates. The depth of water on sill is 22 ft. to 26 ft. (springs) and 18 ft. (neaps).

Bentinck Dock: Size 1,000 ft. × 400 ft. Connected with the Alexandra Dock by a passage and gates over which pass 2 swing bridges. Double-sided jetty 235 ft. long.

The quays of the 2 docks have a water frontage of approximately 1 mile and provide a total of 18 berths.

STEVEDORES: Gangs usually can be provided at minimum notice. Main commodities and handling rates: timber (60 tons pre-pack, pre-slung, per gang-hour), steel rods (70 tons per gang-hour), tinplate (90 tons per gang-hour), coal (75 tons per gang-hour), also roll-on/roll-off and container handling.

TANKERS: 4 tanker berths in enclosed docks. Discharge from vessels is to 6-in. connecting pipes feeding 8-in. pipes to storage tanks.

MEDICAL: It is advisable to give advance notice of required medical attendance via Agent. In emergency the Harbour Office will pass on requests received over the VHF R/T Port Operations and Information Service. For other medical information, refer to the Port Medical Officer of Health and H.M. Customs.

FUEL: Available at berths alongside King's Lynn Harbour on 24 hours previous notice. Light-grade fuel oil, gas oil, petrol and paraffin only.

FRESH WATER: Available on all berths through 4-in. pipes off hydrants from public supply.

OPENING/CLOSING HATCHES: Done by crew. Cranes available for heavy beams.

GANGWAY/DECK WATCHMEN: Vessels responsible for providing own gangways at King's Lynn Harbour berths, where the Regulations require the Master or other person having the care of any ship or other craft to have a proper number of hands on board to attend moorings and to comply with all the requirements and directions of the Harbour Master or his Deputy or Assistants.

CONSULS: Vice-Consul for the Netherlands and German F.R. Vice-Consul for Sweden and Denmark.

REPAIRS: Limited facilities only available locally for hull and engine repairs.

AIRPORT: Charter flights from Cambridge and Norwich airports about 45 miles from King's Lynn. Regular flights from London (Heathrow) about 100 miles from King's Lynn.

POLICE/AMBULANCE/FIRE: In emergency dial 999 and ask for the service required. Normal service: Police – King's Lynn 61311; Ambulance – King's Lynn 3503 or 3910; Fire Service – King's Lynn 5163.

HOLIDAYS: Cargo work usually available at overtime rates on Saturday and Sundays and on all public holidays.

AUTHORITY: The King's Lynn Conservancy Board.

LARNE: 54.51 N. 05.48 W. (See Plan Book)

DOCUMENTS: See "Belfast".

PILOTAGE: Not compulsory, though private pilots operate who, when required, are engaged by ship's Agent. Pilots board off Fairway Buoy. Port VHF. Channels 16 and 14.

ANCHORAGES: Inner anchorage in Larne depth up to 5 fathoms. Anchorage outside Fairway Buoy exposed in N.E. winds.

MAX. SIZE: Draft dependent on berth but max. 19 ft. at MLWS, and 20 ft. at MLWN. Oil tankers proceed to Ballylumford Power Station which lies across Larne Lough directly opposite Larne Harbour.

Approach channel has depth of 30 ft. at MLWS and berth has 35 ft at MLWS.
HEALTH: See "Health – All Ports" before first U.K. port.
RADIO: Portpatrick.
TUGS: Not based at Larne, only heavy-duty motor launches suitable for small vessels. As a rule tugs are not required for vessels using Larne Harbour.
BERTHING: 1 berth equipped with two 5-ton cranes for grabbing and general cargo work. 2 berths are equipped with cranes of 32 and 35-ton capacity for handling containers. 4 berths are equipped with roll-on/roll-off ramps, capable of taking loads up to 160 tons and ships up to 70 ft. beam.
STEVEDORES: Larne Harbour Ltd. carry out all the stevedoring. 24 hours notice required for arrangements.
MEDICAL: No advance notice required for medical attention, a hospital being situated 1 mile from harbour. No special inoculations or certificates required.
TANKERS: 1 tanker berth in Larne Harbour. Depth alongside, 18 ft. below datum. Max. length of vessel 260 ft. Pipe diameter 6 in. Discharging only. For Ballylumford, see "Max. Size".
DENSITY: 1025.
FRESH WATER: Unlimited by shore hose. Rate 7 to 10 t.p.h.
FUEL: Fuelling carried out by road tanker. Arrangements to be made through ship's Agent.
GANGWAY/DECK WATCHMEN: Agents arrange watchmen.
OPENING/CLOSING HATCHES: Performed by crew.
CUSTOMS ALLOWANCE: Agents arrange with Customs.
IDENTIFICATION CARDS: Not required.
CONSULS: Consuls in Belfast can be contacted through ship's Agent.
REPAIRS: Limited repairs by local firms. Major repairs by Belfast firms.
REPATRIATION: Possible.
AIRPORT: 20 miles. Regular flights.
HOLIDAYS: 12th and 13th July, Easter Monday and Tuesday, Christmas Day, Boxing Day and New Year's Day. No cargo worked on these days.
POLICE/FIRE/AMBULANCE: Dial 999 and ask for Emergency service required.
TELEPHONES: Only on Cross Channel vessels.
AUTHORITY: Larne Harbour Ltd.

LEITH: 55.59 N. 03.10 W. (See Plan Book)

DOCUMENTS:
1 Crew Declaration Form C.142 (Tobacco List).
1 Crew List.
1 Passenger List.
(Also see "Glasgow".)
PILOTAGE: Pilot station Firth of Forth located at Granton, boarding station Inchkeith Island. Contact with pilot cutters can be made on VHF Channels 16 and radio-telephone 2182.
ANCHORAGES: Good holding ground at Inchkeith Island and Leith roadstead depths 18.3–31.0 m. Request should be made to Forth Navigation Service.
RESTRICTIONS: None. Vessels can enter harbour day or night.
MAX. SIZE: Governed by draft of vessels. Max. permissible draft alongside in Imperial Dock 9.1 m. and in Western Harbour 9.6 m.
HEALTH: See "Health – All Ports" before first U.K. port.
RADIO: Forth, Stonehaven and Cullercoats Radio Stations.
RADAR/VHF: Port and Estuary radar service. VHF contact can be made with Leith Harbour Radio on Channels 16. Forth Navigation Service now in operation.
TUGS: Attend inward-bound vessels in Leith roads. Tug's towline available but not compulsory.
BERTHING: Vessels arriving on max. permissible drafts of 9.1 m. and 9.6 m. normally docked by Pilots 1.5 hours before high water.
STEVEDORES: ETA advices given by Master to ship's Agent and conveyed by them to stevedores.
MEDICAL: No advance notice of medical attention required. All hospital facilities available.
TANKERS: 1 tanker berth available – max. permissible draft 9.1 m. Discharge lines 6 in. and 8 in. No slop discharge facilities.
DENSITY: 1015.
FRESH WATER: Available alongside at all berths.
FUEL: All grades available subject to 24 hours notice in advance.
DEVELOPMENTS: None envisaged at present.
GANGWAY/DECK WATCHMEN: Usually supplied by ship but shore watchmen arrangeable by special agreement.
OPENING/CLOSING HATCHES: Custom of the port is that this work is normally carried out by ship's crew.
CERTIFICATES:
Ship's Register.
Load-line.
Safety Radio.
Safety Equipment.
Cargo Construction.
Deratisation Certificates.
Light Dues receipt.
CUSTOMS ALLOWANCE: Usual amounts allowed by Customs and Excise.
CARGO GEAR: No additional requirements necessary to comply fully with local safety regulations as all gear supplied by stevedores.
IDENTIFICATION CARDS: Not required.
CONSULS:
Foreign Consular Offices in Edinburgh and Leith:

American Consulate General	031-556 8315
Austrian Consulate	031-556 2396
Belgium	031-554 5581
Denmark	031-552 7101
Dominican Republic	031-337 7098
Finland	031-557 2738
	031-552 7101
French Consulate General	031-225 7954
Residence	031-556 3184
Germany, The Federal Republic of, Consulate General of	031-337 2323
Greece, Consulate General	031-556 1701
Icelandic (For Scotland) Consulate General	031-226 4259
Italian Consulate General	031-226 3631
Netherlands	031-229 8851
Norway	031-552 7101
	031-226 5701
Philippines, Consulate of	031-554 8125
Portugal	031-339 5345
Spain	031-554 5555
Sweden	031-554 6631
Switzerland	031-226 5513
Vietnam	031-225 3161

REPAIRS: Facilities available to carry out all types of deck and engine repairs.
DRY DOCKS: Largest dry dock "Imperial", length 167.6 m. width of entrance 21.3 m. depth over blocks at 7.3 m. also 2 smaller dry docks.
REPATRIATION: All facilities available for effecting crew changes and repatriation by sea, air and rail.
AIRPORT: Edinburgh Airport served by regular airlines and located approx. 9 miles from Leith.
TIME: British Standard Time, GMT plus 1 hour. GMT in Winter months.
HOLIDAYS: Public holidays observed annually: 3rd Monday in April; 3rd Monday in September; Christmas Day (25th December); 26th December; 1st, 2nd, and 3rd January. Cargo work can be arranged on public holidays except 1st and 2nd January.
POLICE/AMBULANCE/FIRE: Tel. 999 and ask for service required.
TELEPHONES: Can be arranged with GPO or VHF Channel 16 with Leith Harbour Radio.
SERVICES: Compass adjusting facilities available.
SHORE LEAVE: No restrictions.
DELAYS: Minimal delays in berthing, loading and discharging.
AUTHORITY: Forth Ports Authority.

LERWICK: 60.09 N. 01.08 W. (See Plan Book)

PORT LIMITS: All waters contained within the following boundaries including Dales Voe and Aith Voe.

Straight line drawn from the N.E. extremity of Hawks Ness (60° 13′ 27″ N., 1° 10′ 00″ W. approx.) in an E.S.E.'ly direction to the N.E. extremity of Green Holm and thence in a S.E.'ly direction to the N.E. extremity of Score Head in the island of Bressay. Thence in a W.'ly and S.'ly direction along the high Water Mark of all foreshores to Whinna Skerry (60° 07′ 45″ N., 1° 07′ 17″ W. approx.). Thence in a straight line in a W.'ly direction to the S. extremity of Ness of Sound. Thence along high water mark of all foreshores in a generally N.'ly direction to Hawks Ness.
DOCUMENTS: See "London".
PILOTAGE: *Pilot Office:* At foot of Victoria Pier in Harbour Master's office. Lat 60° 09′ N., Long. 1° 08′ W. Limits of Pilotage District similar to Port limits given above. Licenced Pilots always available on 24 hour service subject to following correct procedure given below.

Call Sign: Lerwick Harbour Radio.

Frequencies: Calling: VHF Channel 16. Working: VHF Channel 12. Pilot Cutter: VHF Channels 6, 11, 12 and 16.

Port Control: Fitted with VHF Channels 11, 12 and 16. Continuous watch is maintained 24 hours per day, 7 days per week on Channel 16 except when working vessels on Channel 12.

Procedure: The Port Control Office controls the movement of all vessels arriving or departing by either entrance and all movement within the harbour from public or private quays or supply bases, whether such vessels are under the control of Pilots or not.

(a) Vessels requiring pilotage should arrange with Agent not less than 24 hours before arrival. Vessels without Agent should contact Lerwick Harbour Master through Coast Radio Stations not less than 24 hours before arrival. Vessels leaving ports less than 24 hours steaming away should advise time of sailing, projected speed and ETA at time of leaving last Port. Vessels inward from Continental Shelf should advise time of leaving location, projected speed and ETA at time of leaving last location. Amended ETA's should be

advised 2 hours before the time given in the last transmitted ETA. VHF contact should be made with Lerwick Harbour Radio while still 1 hour away when final pilotage and berthing arrangements will be made. Port control cannot guarantee a Pilot on station unless 1 hour's notice is given.

(*b*) ETA messages should also contain information on which harbour entrance is to be used, draft and length overall. Vessels entering by the South entrance will be boarded West of Kirkabister Lighthouse or near Knab Point if weather conditions are unsuitable. Vessels entering by the North entrance will be boarded abeam of the Green Holm and 0.5 miles N.E. of Beosetter Holm. If boarding conditions in this area are unsuitable the South entrance must be used.

(*c*) Pilot Cutter m.v. *Bard* is a 60 ft. converted wooden MFV. Black hull with large, white letter "P" on each bow, white upperworks and varnished wheelhouse. International pilotage signals are in use.

(*d*) Outward vessels should call the Port Control 1 hour before departure when information on traffic movement will be given and arrangements for pilotage will be made. When moving within the harbour all vessels should maintain a continuous listening watch on Channel 16. All vessels moving within the harbour should report to the Port Control immediately prior to leaving the berth or anchorage, whether a Pilot is on board or not.

(*e*) Pilotage within Lerwick Harbour is compulsory, but all vessels not carrying passengers are exempt.

(*f*) Telephone number of Lerwick Harbour Master and Pilot station is Lerwick 3462.

ANCHORAGE: Ample anchorages in harbour roads.

MAX. SIZE: Vessels up to 20 ft. draft and 320 ft. long alongside berth as routine. Vessels of greater length and for draft may be accommodated alongside after discussion with Harbour Master. Anchorages available for any size of vessel subject to prior consultation with Harbour Master, if above 10,000 g.r.t. No mooring buoys available.

HEALTH: See "Health – All Ports" before first U.K. port.

RADIO: Nearest Coast Radio station 'Shetland Radio'' Frequency and other details as for "Wick Radio" except for VHF working Channel which is Channel 27.

"Lerwick Harbour Radio" see "Pilotage".

TUGS: No tugs available but Pilot cutter will give towage assistance within her capabilities.

BERTHING: Berths are available for the handling of most cargoes including Roll-on/Roll-off and arrangement should be made through Agents well in advance of arrival. No berths available for handling liquid chemicals. Mobile cranes available from Harbour Authority up to 30 tons capacity or through private operation to 110 tons capacity.

STEVEDORES: Arranged through Agent.

MEDICAL: Medical aid can be arranged through Agent or Coastguard at any time day or night.

COASTGUARD: Lookout on top of Knab Point manned 24 hours a day. Fitted with MF and VHF Radio Channels 16, 13, 10 and Zero.

TANKERS: BP Oil have their own discharging berth. Tankers are also able to discharge at various Offshore Oil Industry Supply berths

DENSITY: Density 1025 at all states of tide.

FRESH WATER: Available at most berths, 65 to 100 t.p.h. No water boat.

FUEL: Gas oil available on demand.

FIRE PRECAUTIONS: No-smoking regulations in operation inside all transit sheds. Usual tanker terminal regulations in operation. Handling of explosives covered by local Bye-Law.

GANGWAY/DECK WATCHMEN: Ships usually supply own watchmen. No fixed sum if shore watchman is employed.

OPENING/CLOSING HATCHES: Crew open hatches.

CUSTOMS ALLOWANCE: Tobacco, wine/spirits; at the discretion of the Customs and Excise.

IDENTIFICATION CARDS: Foreign seamen have to supply same if left behind, i.e. hospital, etc.

CONSULS:

Denmark	(Vice)	3057
Finland	(Vice)	3057
France	(Vice)	3057
W. Germany		2556
Iceland		4121
Netherlands	(Vice)	3057
Norway		3057
Sweden		2556

REPAIRS: Repairs to fishing vessels and other small craft in steel, wood and fibre glass. Also engine and machinery repairs. Comprehensive electronics repair facilities.

DRY DOCKS: No dry dock available, slip available to take small vessels up to 100 d.w.t.

REPATRIATION: Facilities exist.

AIRPORT: 25 miles to airport. 5 services per day operated by British Airways. Charter flights by Dan Air and other airlines.

HOLIDAYS: Scottish holidays. Working can be arranged on these days if so desired.

POLICE/AMBULANCE/FIRE: Emergency telephone 999 or call Port Control VHF Channel 16. Harbour Master and Port Control 3462 night or day.

TELEPHONE: Ships telephones can be arranged.

SERVICES: No tank-cleaning equipment. Compass adjuster can be procured if necessary.

SHORE LEAVE: No restrictions.

AUTHORITY: Lerwick Harbour Trust.

LIVERPOOL: 53.32 N. 03.19 W. (See Plan Book)

DOCUMENTS: Required on arrival, Crew List Form I.B.6 to be completed; this list to include all passengers and any British subjects who joined vessel outside of U.K. If any person falling into this category should be on board they must not leave until permission to land is granted by Immigration Officer.

Customs Form C.142, Declaration of goods obtained abroad or during a voyage, must be completed and signed by Master, and each crew member. Health Declaration must be completed. Above forms should be obtained from Pilot.

Manifest and Bills of Lading should be forwarded to vessel's Agent so as to be available before vessels arrival.

Ship's Papers Required:

Ship's Register.
Certificate for British Tonnage (if issued).
Safety Equipment Certificate.
Safety Radio Certificate.
Safety Construction Certificate.
International Load-line Certificate.
Derating Exemption Certificate.

PILOTAGE: At least 48 hours before arrival, inward vessels should give ETA Lynas/Mersey Bar to Agent. Agent will then arrange docking and advise Pilot Office, the Master will receive radio message giving final docking instructions.

Pilot Stations. Vessels arriving from South should take Pilot on board at Point Lynas. Contact shore based pilot station on VHF Channel 9 for boarding instructions. Pilot will board from 40 ft. pilot launch.

Vessels arriving from North should take Pilot at Mersey Bar Pilot Station at entrance to the principle buoyed channel leading to the Mersey. Contact pilot boat on VHF Channels 16 or 12 for boarding instructions.

Description of Bar Pilot Boat. Black top sides with 2 in. yellow ribbon and white boot topping to water line. Yellow funnel with black top. The name "Liverpool Pilot" painted on each side.

In heavy weather if Master of the pilot boat considers it imprudent to send a launch to put a Pilot on board an incoming vessel, he will make the appropriate signals by VHF, morse or other means that effect.

Also see "VHF".

ANCHORAGE: In the event of berths not being readily available for vessels, normally they must wait at the Mersey Bar Anchorage which is in the open roadstead. There are river anchorages, but these are only usually for vessels about to enter the dock system.

RESTRICTIONS: No restrictions on night entry, except VLCC's, tidal restrictions depend on vessel's draft and to which berth vessel proceeding, larger vessels usually have to wait for high water.

MAX. SIZE: Tranmere: up to 48 ft. (14.6 m.) draft dependent on tide. Birkenhead: up to 29 ft. (8.8 m.) draft. Liverpool Docks: up to 40 ft. (12.2 m.) draft.

Seaforth Dock: 50 ft. (15.2 m.) of water depth, up to 75,000 d.w.t.

HEALTH: Maritime Declaration of Health Form must be completed and handed to Customs Officer or Port Health Officer, whoever first boards ship. This form is obtainable from Pilot. In event of any suspected disease or fever on board, or if ship has called during last 4 weeks at any port in Brazil, China, Indo-China, India, Pakistan, Burma, Colombia and the port of Dar-es-Salaam, West African ports between Lat. 20° North and 20° South, the Master should, prior to entering port, make radio contact with Liverpool Port Health Authority, via Anglesey Radio or Port Radar Station (Signal "Portelth Liverpool") giving them following information:

1. Name of Ship. 2. Date of departure from and name of last infected port. 3. Number, ages and sex of any cases of infectious diseases or other relevant information. 4. Expected time of arrival at Rock Light. Before reaching the Rock Light if medical clearance has not been obtained the following signal must be displayed: by day – fly the flag signal "Z W". By night – show red light over white light.

When medical clearance is obtained pratique will be issued at discretion of Customs Officer.

If there is no suspected disease on board and vessel has not called at any of the above ports listed, Master can radio for Free Pratique. Unless otherwise instructed, Customs Officer will again issue pratique.

Vessels arriving from another U.K. port do not require pratique or health clearance.

Also see "Health – All Ports" before first U.K. port.

RADIO: Portishead Radio, call sign: GKL; Landsend Radio, call sign: GDL; Wick Radio, call sign: GKR; but on approaching Liverpool, the local radio station is Anglesey Radio, call sign: GLV.

RADAR/VHF: Vessels should establish contact by VHF/RT with the Port Radar Station call sign "MERSEY RADIO" before sailing and inward bound when within VHF/RT range and not later than when in the vicinity of the Bar Lighted Buoy.

Harbour Radar: The Liverpool Port Radar Station is now situated at the N.W. corner of the Royal Seaforth Dock Lat. 53° 27′ 56″ N. Long. 03° 02′ 22″ W.

The radar coverage extends seaward over Liverpool Bay for a radius of 20 miles from the station and in the River Mersey as far south as the approaches to the Manchester Ship Canal.

Vessels entering or leaving the Port in conditions of low visibility can, on request, be supplied with continuous information of their position whilst navigating in the river or sea channels, providing such vessels can be identified.

A general situation and movement statement, giving all intended movements inwards and outwards for the Port of Liverpool, Eastham, Bromborough, Garston and Cammell Lairds and approximate times at the dock entrance or river berth, together with a list of Local Navigation warnings in force, latest weather reports and area forecast, is broadcast on Channel 9 at 3 hours before each high water. This full statement is repeated with any amendments and the disposition of the River Anchorages North and South at 2 hours before each high water.

Any local navigation warning is broadcast on receipt on Channel 12.

A full list of navigation warnings is broadcast on Channel 9 every 4 hours, commencing at 0000 hrs. No separate broadcast of this list is made during the period from 4 hours before high water to 1 hour before high water as such warnings are included in the General Situation and Movement Statement. An updated taped recording of the above General Situation and Movement Statement is broadcast on request on Channel 4.

Docking Instructions: The VHF/RT Stations at the Dock Entrances and Stages are provided to facilitate docking and berthing operations and to provide direct communication between the Dock Master or Stage Master and a vessel. The Range of these stations is limited to a distance of 6 to 8 miles.

Tug Communications: Channels 8 and 10 are reserved for tug communications and should not be used for any other purpose. Due to the heavy working of these Channels, especially at tide time, and in order to minimise interference, vessels and their tugs when communicating to one another on VHF/RT, should, when possible transmit on reduced power.

Large Vessels Swinging: Vessels of 150 m. or over in length intending to swing in the river should give advance notice of at least 10 minutes to Mersey Radio of their intentions so that Mersey Radio can broadcast on Channel 12 a swinging warning to all ships.

Port VHF Radio Telephone Communications System:

Station	*Call Sign*	*Hague Channel Number*	*Remarks*
Liverpool Port Radar Station	Mersey Radio	16	Calling and safety
		12	Port Operations – Calling and navigation.
		9	Port Operations and routine broadcasts
		18, 22	Port Operations and Radar information
		19	Radar information and general, for tanker traffic for Tranmere only.
		4	Navigation Broadcasts. Transmitting Only.
			A continuous watch is kept on Channels 16 & 12 at Port Radar Station
Gladstone Dock Master's Office	Gladstone Dock	5	Port Operations and Docking Instructions.
Langton Dock Master's Office	Langton Dock	21	
Waterloo Dock* Master's Office	Waterloo Dock	20	
Alfred Dock Master's Office	Alfred Dock	5	
Tranmere Stage Master's Office	Tranmere Stage	19	
British Transport Docks Board			
Garston Dock Master's Office	Garston Dock	20	Port Operations and Docking Instructions.
U.M.L. Ltd.			
Bromborough Dock Master's Office	Bromborough Dock	21	Port Operations and Docking Instructions.
Manchester Ship Canal			
Eastham Locks Office	Eastham Locks	7	Port Operations and Docking Instructions
M.D. & H.C. Pilot Stations			
Point Lynas Shore Station	Lynas Pilot	16	Calling and safety
		9	Ship to shore.
Mersey Bar Station	Bar Pilot	16	Calling and Safety
		6	Intership

*Includes Liverpool Landing Stage.

Local Priority Messages: A vessel which has an urgent message to transmit to Mersey Radio concerning urgent navigation matters and which message should receive priority over normal Port Operations R/T Communications, should indicate the urgency of the message by prefixing the call sign of the Port Radar Station with the spoken word "PRIORITY" i.e. "PRIORITY MERSEY RADIO" repeated 3 times followed by normal procedure.

In special circumstances such as the launch of a vessel or in an emergency such as a wreck, it may be necessary temporarily to establish a patrol for the control of traffic. Vessels will be warned of the existence of any such patrol by "Mersey Radio" and any such patrol vessels or launches will maintain a listening watch on Channel 12 and communicate with other vessels on Channel 6.

R/T Procedure

Channels to be used for calling and for Preparatory Signals: Mersey Radio and ship stations will call on Channel 12. Channel 16 should only be used for distress, urgency or safety communications.

Channels for reply: Calls received on Channel 12 should be replied to on the same Channel, but if calls are received on Channel 16, replies should be made on this Channel.

Indication of the Channel to be used for radio telephone traffic: When communication has been established on Channel 12 between a ship and "Mersey Radio", the shore station will indicate the number of the Channel to be used for passing and receiving information if Channel 12 is busy.

Times: All times in messages should be given in local time, i.e. B.S.T. or G.M.T., using the 24 hour notation.

R/T Discipline: To ensure that the full advantage of efficient communication is achieved, strict telephone discipline and attention to procedure, particularly on the calling Channel is imperative. Channel 16 must only be used for establishing contact between ship and shore or ship and ship, and must not be used for the passing of messages except in cases of distress within Port limits. Channel 12 should be used for establishing contact between ship and shore or ship and ship.

Sequence of R/T communication for vessels entering the River Mersey: (i) Vessels wishing to communicate with the Liverpool Pilotage District Point Lynas Shore Station should call "Lynas Pilot" on Channel 9. Channel 16 shall only be used in case of difficulty in establishing initial contact.

(ii) Vessels wishing to communicate with the Bar Pilot Cutter should call the Pilot Cutter on Channel 16 and shift to Channel 6 for exchange of traffic. The Pilot Cutter also maintains watch on M/F R/T on 2182 KHz.

(iii) When within VHF R/T range and not later than when in the vicinity of the Bar Lighted Buoy the vessel should establish contact with Mersey Radio on Channel 12 and pass her arrival information on Channel 12 or other Channel indicated by Mersey Radio, watch should be kept on Channel 12 unless instructed to remain on another working Channel for Port Operational reasons. A vessel at anchor at the Bar anchorage should keep watch on Channel 16.

(iv) Vessels requiring radar information or assistance will be requested to shift to Channel 18 or 22, or if a tanker for Tranmere, Channel 19.

(v) Vessels should inform Mersey Radio when they are ceasing to keep a listening watch on Channel 12. If they are shifting to a tug or a dock entrance or Tranmere Oil Stage Channel they should inform Mersey Radio of such intention.

Vessels sailing from the River Mersey: Vessels, on sailing from any Stage or Dock, should establish contact with Mersey Radio on Channel 12 and then maintain watch on that Channel unless instructed to remain on another working Channel for Port Operational reasons. Vessels requiring radar information or assistance will be requested to work on Channel 18 or 22, or if a tanker from Tranmere, Channel 19.

TUGS: Join vessel after passing Rock Light. Normally use tug's lines but optional. Charge for tug's hawsers.

STEVEDORES: Earliest possible ETA to be given to arrange gangs.

MEDICAL: If doctor is required to attend immediately on arrival of vessel, prior notice will be required, but generally doctor is arranged for most convenient time after vessel's arrival. All seamen should be vaccinated against smallpox.

Hospitalisation is available, but seamen will only be admitted if immediate treatment is required. It is preferred for foreign seamen requiring hospital treatment to be repatriated, if able to travel.

Dentist available by appointment only.

BULK HANDLING FACILITIES: Seaforth Grain Terminal designed to accommodate up to 75,000 d.w.t. vessels, length 850 ft. Max. draft 42 ft. Discharge capacity up to 2,000 t.p.h. Two marine towers with storage for 100,000 tons.

The container terminal at Seaforth Dock provides four berths, each 900 ft. in length, max. draft 42 ft. Equipment includes five container cranes and 24 straddle carriers.

Four berths equipped for container handling provided on North side of Seaforth Dock. Each length 900 ft. depth 42 ft.

Bulk handling of sugar at North side, Huskisson Branch Dock No. 3. Two berths each equipped with four grab cranes delivering direct to conveyors.

Iron ore is handled at North Bidston Dock. This berth has a quay frontage of over 1,000 ft. and can accommodate vessels of 28.5 ft. draft. There are three transporters, each with an hourly free digging capacity of 350 tons which discharge either into road or rail vehicles via 175-ton hoppers, or into coasters or barges.

At Cavendish Quay there are two 20-ton cargo level luffing jib cranes with a grabbing capacity of 15 tons. Each crane is designed to handle up to 450 t.p.h. The loading of bulk materials into either road or rail wagons is speeded up by the use of two 100-ton capacity mobile weigh hoppers.

Duke Street Wharf also has specialised facilities for the handling of these commodities. There are four 7.5 ton electric level luffing cranes, each with a lifting speed of 250 ft. per minute. There is good road access to this berth where vessels drawing up to 28.5 ft. can be accommodated.

Packaged forest products are handled at two adjacent berths at Seaforth with a combined quay length of 1,400 ft. with a back-up area of 18 acres which includes approximately 15 acres for timber stacking with a timber-storage barn.

Meat is handled at the following berths: North 2 Alexandra and No. 2 Seaforth. Seaforth meat terminal, with an 800 ft. quay, can handle the largest refrigerated ships in commission.

There are 7 berths in the port with roll-on/roll-off facilities, namely South No. 3 Seaforth, S10, S6, the B+I Terminal, Princes Dock, Nelson Dock and North 3 Canada.

Birkenhead: East Tower grain berth can accommodate vessels up to 630 ft. length, max. draft 29 ft. 6 in.

Buchanans Mill, max. length 475 ft.* draft 28 ft. 6 in.; Ranks Mill, max. length 475 ft.* draft 28 ft. 6 in.; Spillers Mill, max. length 450 ft.* draft 28 ft. 6 in.

*Up to 500 ft. by special arrangement.

TANKERS: Oil tanker cleaning and slops discharging may be carried out at Rock Ferry Tanker Cleaning Jetty.

Tranmere South Stage – Capable of accommodating tankers up to 100,000 d.w.t., max. draft 40-48 ft. (12.20-14.60 m.), depending on height of tide.

Tranmere North Stage – Capable of accommodating tankers up to 275,000 d.w.t. after lightening to 140,000 tons, max. 48 ft. (14.60 m.) at high water.

Queen Elizabeth II Dock, Eastham – 4 berths – can take vessels of 28,000 tonnage dependent on height tide and vessels dimensions. (See "Manchester".)

DENSITY: River Mersey salt water. Docks approx. 1020.

FRESH WATER: Available at all berths, ex quay. No water barges available. Rate of delivery 15-20 t.p.h.

FUEL: Most major oil companies are represented and can supply range of fuels of various viscosities. Notice required depends on the berth at which vessel is lying as bunkers are supplied ex lighter at most berths. Notice required can vary depending on availability of barges, but generally at least three to four days notice is required.

FIRE PRECAUTIONS: Tankers may not carry out repairs whilst at discharging berth unless permission is obtained from Harbour Authorities. Fire precautions notice is placed on board by Harbour Authorities.

GANGWAY/DECK WATCHMEN: Watchmen not necessary but available if required.

OPENING/CLOSING HATCHES: Carried out by ship's crew for bulk cargoes and by stevedores for general cargoes.

CERTIFICATES:

Register/Certificate of Measurement.
Certificate of British Tonnage (if issued).
Safety Radio Certificate.
Safety Construction Certificate.
Safety Equipment Certificate.
Load-line Certificate.
Derating Certificate.
Cargo Gear Test Certificates.

CUSTOMS ALLOWANCE: Crew members who remain on vessel during vessel's stay in port may be allowed, under certain conditions, to keep for their own use on board small quantities of any tobacco, spirits and other goods declared on Customs Form C.142. The amount allowed depends on the number of days the vessel is in port.

CARGO GEAR: Cargo Gear Certificates must be produced with the necessary up-to-date endorsement.

IDENTIFICATION CARDS: Not required.

CONSULS: The following countries have representatives in Liverpool:

Argentina
Belgium
Bolivia
Brazil
Chile
Colombia
Denmark
Dominican Republic
Ecuador
El Salvador
Finland
France
Germany
Greece
Haiti
Iceland
Italy
Japan
Liberia
Netherlands
Norway
Panama
Paraguay
Peru
Philippines
Portugal
Spain
Sweden
Thailand
Uruguay
U.S.A.
Venezuela

REPAIRS: All types of deck and engine repairs can be carried out.

DRY DOCKS: Largest – length 950 ft.×140 ft. Also 15 smaller dry docks.

REPATRIATION: Can be effected, but must be arranged through Agent, so that Immigration Clearance can be arranged.

AIRPORT: City Centre to Airport approximately 7 miles, regular service to London for international connections.

TIME: British Standard Time, which is one hour in advance of Greenwich Mean Time, reverting to GMT in Winter months.

HOLIDAYS: Good Friday; Easter Monday (alterable); last Monday in May; last Monday in August or first Monday in September, whichever may be closest to August 31st. December 25th-26th and New Years Day. Weekly holidays Saturday, Sunday. Cargo can be worked on official holidays, other than 25th-26th December, also arrangements can be made for cargo to be worked on Sundays.

POLICE/AMBULANCE/FIRE: Telephone 999, ask for service required.

TELEPHONES: A temporary telephone can be placed on board a vessel, at most berths, whilst in port.

SERVICES: Tanker cleaning and slops services at Rock Ferry Tanker Cleaning Berth. Compass adjusting, D.F. Calibration can be arranged.

SHORE LEAVE: All bona fide crew members may be granted temporary shore leave during the vessel's stay in port, on condition that they leave in the same ship. This permission does not apply to any alien member of the crew who is refused leave to land by an Immigration Officer, or to whom an Immigration Officer has given notice prohibiting him from landing without leave.

AUTHORITY: Mersey Docks and Harbour Company.

AGENT: Lambert Brothers (Ship Agencies) Ltd., Peel House, 5 Harrington Street, Liverpool, L2 9UG. Tel. 051-236 7206. Telex: 629510. Cables "Lambert Liverpool".

LONDON and Thames District: 51.30 N. 0.05 W.

(See Plan Book)

PORT LIMITS: The seaward limit means lines drawn from 51° 37′ 00″ N. 00° 57′ 19″ E. (Foulness Point in the county of Essex) to 51° 46′ 05″ N. 01° 20′ 32″ E. (Gunfleet old Lighthouse) and thence to 51° 26′ 36″ N. 01° 25′ 30″ E. and thence to 51° 24′ 55″ N. 00° 54′ 21″ E. (Warden Point in the county of Kent).

An arrived ship is considered (subject to Charter Party terms) to have arrived when vessel is instructed to anchor at a designated anchorage, as ordered by the Port Authority, if berth where vessel's operations are to be carried out is not available. Otherwise when vessel is alongside. Usual anchorage for larger vessels is below Southend, which is allocated to vessels by the Port Authority.

DOCUMENTS:

1 copy of HM Customs and Excise form C.142 to be completed showing each crew members declaration as to the amount of cigarettes, tobacco, spirits, wine, radios, lighters, etc., belonging to them on board the ship to enable Customs to ascertain if in conformity or excess of requirements.
1 copy of HM Immigration Office (pink form) showing Master's declaration of crew members on board.
1 copy of List of Passengers on board, showing names, place of joining vessel, passport details.
Ship's Register to be available for inspection on arrival.
List of space occupied by cargo in unregistered space.
Chief Engineer's declaration as to the quantity of fuel carried in double bottom tanks.
Details of any livestock on board.
Ship's Stores declaration arrival Form C14 to be completed.
Details of previous ports of call.

PILOTAGE: Pilotage by licensed Pilots in London pilotage district is compulsory unless previous exemption is granted.

Vessels approaching from South enter the pilotage area off Folkestone Harbour position (Lat. 51° 04′ 37″ N. Long. 01° 11′ 21″ E.).

Vessels approaching from the North collect the Pilot at Sunk Pilot Cutter which operates in the vicinity of the Sunk Light Vessel off Harwich. Also see "Harwich".

Radio Communication – General: The maximum range for radio messages is about 20 miles for VHF. The shore Pilot stations and shore based fast launches operate on VHF only.

Attempts to establish communication at extreme ranges cause much unnecessary interference. The first estimated time of arrival should be sent through a Post Office Coast Station giving at least 1 hours' notice of the ETA. Anything less than 1 hour's notice *must* involve ships in delay. The maximum range for MF radio messages is about 50 miles.

Ships should if possible remain in direct contact with the pilot launch or pilot vessel on their approach, as this facilitates shipping the Pilot.

FOLKESTONE PILOT STATION

Pilot launches, with black hulls and white wheelhouses and flying the pilot flag, operate from a shore station at Folkestone to provide Pilots for ships making the port of London and other ports in the London Pilotage District and to disembark Pilots from outwardbound ships. The conspicuous building is 77 ft. high and flies a pilot flag by day; by night it displays an illuminated sign with the word "Pilots". The launches normally ship and land Pilots in a position 225° distant 1 mile from Folkestone Pier Light in fine weather but farther off in bad weather.

A shore VHF station is maintained at Folkestone (Lat. 51° 04′ 37″ N. Long. 01° 11′ 26″ E.), and all requests to ship and land Pilots off Folkestone should be made to it.

Ships requiring a Pilot at the Folkestone Station should give the shore station, 12 hours in advance and through a Post Office Coast Station, their estimated time of arrival, gross tonnage, maximum draft and port of destination. Any adjustment to this time should be given at least 2 hours before arrival. The message should be addressed to "Pilots Folkestone".

The following Channels are in use by Folkestone Shore VHF station (call sign "Folkestone Pilots Radio"):

Channel 16 (Calling): A 24 hour listening watch is kept on this Channel, and ships should make contact on it.

Channel 9 (Working): After initial contact has been made on Channel 16, a transfer should be made to Channel 9 for the exchange of operational messages. It is stressed that the shore station has no other working frequency and that ships wishing to communicate with it must have Channel 9 fitted.

Masters of ships approaching Folkestone are advised to maintain a listening watch on Channel 16 so that they can receive any messages for their ships from the Pilot station.

Masters are warned that it is difficult to receive VHF signals from Folkestone when their ships are to the Westward of Dungeness owing to the presence of very large buildings.

The station is manned by a duty Pilot and is equipped with telex, telephone, radar and a daylight signalling lamp. The communications details are:

Tel. Folkestone (code 0303) 56766.
Telex 96381, Pilots Folkestn.
Telegraphic address "Pilots Folkestone".

Ships without VHF should send any amendment of their ETA in sufficient time to allow its delivery through the Post Office telex network. Ships without VHF should also establish their identity by visual means during their final approach.

If requested Folkestone Station Pilots may also be embarked off

Brixham 1.5 miles N.E. of Berry Head in position 50° 24′ N., 3° 27′ W., or off Cherbourg at buoy CH I in position 49° 43′ N. 1° 40′ W. 24 hours notice is required by Folkestone Pilot Station for picking up at Brixham, and 36 hours for Cherbourg.

Should a deep drafted vessel not wish to approach too closely to the Folkestone pilot station, then the pilot cutter will meet this vessel 1 mile to the South-east of the East Road port red can lighted buoy, Gp fl. 4 red every 15 seconds, which is moored about 4.75 miles North-eastwards of Dungeness in position 50° 58′ 18″ N., 01° 03′ 48″ E.

N.E. SPIT.

Ships bound to or from ports between Amsterdam and Dieppe inclusive may land or ship their Pilots by means of a pilot launch which operates as required, but does not cruise, in the vicinity of the N.E. Spit Buoy, but it is emphasised that ships from beyond these 2 ports or bound to ports beyond them are required to ship or land their Pilots at the Sunk or Folkestone Pilot stations.

A shore VHF station operates from North Foreland Lighthouse (51° 22′ 27″ N., 01° 26′ 49″ E.) which is linked by land-line to the Pilot station at Folkestone. The call sign is "North East Spit Pilots Radio" and the only Channel available is Channel 9. A 24-hour listening watch is kept on this Channel.

Advance notification of ships requiring services of a Pilot at the N.E. Spit should be given 6 hours beforehand through a Post Office Coast Station, addressed "Pilots Folkestone", or by telephone to Folkestone (code 0303) 56766 or telex 96381.

"North East Spit Pilots Radio" should then be contacted when within VHF range.

Communication with North East Spit pilot launch may be made on Channel 9 VHF. A ship about to ship or land her Pilot should keep in radio contact with the pilot launch.

Ships without VHF should send their ETA or any subsequent amendment in sufficient time to allow its delivery through the Post Office telex network.

The N.E. Spit Pilot will board vessels between the "Elbow Bury" and the "East Margate Buoy", depending on weather, from a fast launch which is based in Ramsgate Harbour.

RIVER MEDWAY

Messages for the Medway Pilots may be passed through the launches of the Medway Ports Authority, call sign "Medway Patrol". They keep a continuous watch on 2,182 kHz.

Ships bound for the River Medway are requested to call on 2,182 kHz., when 20 to 30 miles from Sheerness, stating their estimated time of arrival, requirements and draft. When contact has been made on 2,182 kHz ships should transfer to 2,241, 2,246 or 2,301 kHz or other licensed intership frequency for passing messages. Ships may also call the Medway Port Operations Service, call sign Medway Radio, when within 20 miles of Sheerness, on VHF Channel 16, transferring to Channel 14 for passing messages.

Sea Pilot leaves vessel at Gravesend when River Pilot boards for final river passage.

PROCEDURE FOR OBTAINING THE SERVICES OF A LICENSED TRINITY HOUSE CHANNEL PILOT.

Ships outward bound from above Gravesend: Masters are requested to give advance notice of estimated time of arrival at Gravesend. Masters of ships fitted with VHF may pass this information direct to Gravesend Radio on the appropriate Port Operations Channel.

Channel Pilots for outward-bound ships are obtainable only from the Royal Terrace Pier, Gravesend, from where they board ships by means of black-painted pilot vessels flying the pilot flag, in response to the statutory signals or a VHF message to Gravesend Radio. In thick or foggy weather 1 prolonged blast followed by 4 short blasts should be sounded by means of a whistle or fog horn or a VHF message should be sent to Gravesend Radio.

In addition to the above, the following signals should be displayed:

Ship's gross registered tonnage	*By day* *International* *Code pendant*	*by night* *White lights*
Not exceeding 2,000	—	1 over the starboard bow
Exceeding 2,000 but not exceeding 6,000	3	1 over the bridge
Exceeding 6,000 but not exceeding 12,000	2	1 over the starboard bow and 1 over the bridge
Exceeding 12,000	1	1 over the starboard bow

Ships outward bound from below Gravesend or shifting between the Nore or Sheerness and Gravesend: When the services of a Channel Pilot are required for shifting a ship inwards between the Nore and Sheerness and Gravesend, or for conducting a ship outwards from below Gravesend, a telephone message should be sent to the Channel Pilots, tel. Gravesend (0474) 3619, stating Name of ship. Time and place at which Pilot is required to join ship. Where bound, Ship's gross tonnage. Ship's draft.

It is particularly stressed that the Pilot must be given adequate time to travel from Gravesend to the ship for her time of sailing, and that allowance must be made for the slowness of night travel and the inaccessibility of some wharves and moorings.

PROCEDURE FOR OBTAINING THE SERVICES OF A LICENSED TRINITY HOUSE RIVER THAMES PILOT.

Duty Pilot: A Trinity House River Thames Duty Pilot is available in the Information Room at the Gravesend pilot station. He can be contacted by telex (Pilot Gravesend 96444) or by telephone Gravesend (0474) 67716/7. Among his duties is the provision of information to Shipowners and Agents, and the Duty Pilot will be pleased to give advice and guidance on the pilotage of ships in the River. The Duty Pilot is in continuous touch with the Duty Officer of the Thames Navigation Service.

Ships outward bound or shifting: When the services of a Trinity House River Thames Pilot are required for piloting a ship down river to Gravesend, or for shifting a ship in the river above Gravesend, a telex message should be sent to Pilot Gravesend 96444. If the message cannot be passed by telex the same information should be given by telephoning Gravesend (0474) 67716/7.

The telex message must start with the word "Pilot" to show that it is an order for a Pilot, and to be consistent with other information now received at the Pilot station by telex, should be in the following form:

1. *Order for Pilot.* The word "Pilot" should be used to show that it is an order for a Trinity House Pilot rather than general information on expected movement. This should be on a separate line from the other information.
2. *Time Pilot required.* This should be expressed as a time on the 24-hour clock followed by a date, e.g. 1035/15 or 2215/16.
3. *Ship's Name.*
4. *Draft.* This should be given in feet.
5. *Berth where lying.* If a shift is required the shift should be shown as "FM Smiths WHF to Jones WHF". If one location is given this is the place where the ship is lying and where the Pilot is required. The abbreviation FM (From) should precede the place where the ship is lying in all messages.
6. *Route or where is bound.* This should state N., S., or E. to show where ship is bound, i.e. N. for ships outward bound to the North, S. for ships outward bound to the South, and E. for ships outward bound to near continental ports between Amsterdam and Dieppe. If an outward Channel pilot is required the letter P should be added so that it reads NP, SP or EP.
7. *Name of Owner or Agent.*

The message should start with the heading of "Pilot" and should continue as follows:

Time	*Ship*	*Draft*	*Berth*	*Route*	*Agent*
2030/15	*Tasman*	13	FM Robinsons WHF	S	E. Wright
0010/16	*British Isles*	18.5	FM Hightown Tier	NP	Despatch Co.
0830/17	*Nicola*	14	FM Black Bys to Spring WHF		Noel S.S. Co.

It is particularly stressed that the Pilot must be given adequate time to travel from Gravesend to the ship for her time of sailing, and that allowance must be made for the slowness of night travel and the inaccessibility of some wharves and moorings. Normally a minimum of 3 hours is required.

Inward bound ships: It is most important that all inward bound ships notify their estimated time of arrival at Gravesend and keep this information up to date. An estimated time of arrival should be given by using the Post Office public correspondence service through North Foreland Radio at least 3 hours before arrival at Gravesend and preferably immediately after the embarkation of the Sea Pilot. When in VHF range this information may be passed direct to Gravesend Radio on the appropriate port operations channel. In addition the following supplementary information should be communicated: draft, and, if known, berth and name of Agents.

Trinity House River Thames Pilots for inward-bound ships are obtainable only from the Royal Terrace Pier, Gravesend, from where they board ships, by means of black-painted pilot vessels flying the pilot flag, in response to the statutory signals or a VHF message to Gravesend Radio. In thick or foggy weather the letter "G" in Morse code should be sounded by means of a whistle or fog horn or a VHF message should be sent to Gravesend Radio.

Table of Abbreviations: Abbreviations used in this notice are: FM=From. WHF=Wharf. N=The route of an outward ship is to the North. S=The route of an outward ship is to the South. E=The route of an outward ship is to near continental port between Amsterdam and Dieppe. NP=The route of an outward ship is to the North and she requires a Channel Pilot. SP=The route of an outward ship is to the South and she requires a Channel Pilot. EP=The route of an outward ship is to the East and she requires a Channel Pilot. Bys=Buoys.

Pilot Ladders: Instances of the use of unsatisfactory and unsafe pilot ladders continue to be reported by Trinity House Pilots.

Faulty ladders endanger the lives of Pilots.

Instructions have been issued to all Trinity House Pilots to report immediately any pilot ladders which do not comply strictly with the provisions of the Merchant Shipping (Pilot Ladders) Rules 1965, the Merchant Shipping (Pilot Ladders) (Amendment) Rules 1971 and the Merchant Shipping (Pilot Ladders) (Amendment) Rules 1972.

Masters of ships are reminded of their obligation to comply with the statutory rules and are requested also to comply with the following Trinity House recommendations, ensuring that:

1. The Officer responsible for the embarkation and disembarkation of the Pilot is a Watch-keeping Deck Officer.
2. The ladder is in one length and does not consist of two or more lengths shackled or lashed together.
3. The ladder is secure.
4. The ladder is used solely for embarking and disembarking Pilots.
5. A light is provided so that the pilot ladder overside and also the position where the Pilot boards the ship is adequately lit.

6. The ladder is clean and free from oil and grease.

7. Means are provided to enable the Pilot to pass safely and conveniently from the head of the ladder into the ship or on to the ship's deck. Where portable stanchions and accompanying bulwark step ladders are used for this purpose, the portable stanchions *must* be rigidly secured to the ship's structure against being unshipped and supported at not less than 2 points to prevent lateral movement, and the bulwark step ladder should also be independently attached and firmly secured. The stanchions should be of reasonable height and adequately capped to allow firm grip. *Under no circumstances should a stanchion or handrail be attached to the bulwark step ladder.*

8. The ladder is in good condition and its treads remain horizontal. The treads are to have a rough upper surface.

9. The length of the ladder does not exceed 30 ft. Whenever the distance from sea level to a point of access to the ship is more than 30 ft., access from the pilot ladder to the ship must be by means of an accommodation ladder or other equally safe and convenient means.

10. The ladder is rigged so that each step rests firmly against the ship's side.

11. Spreaders are provided not more than 10 ft. apart to prevent the ladder twisting.

12. 2 manropes and a safety line are provided; and a lifebuoy with self-igniting light is available.

13. The ladder is rigged well clear of discharges and water outlets, and at a place where most lee can be given to the Pilot Vessel.

14. Where a pilot hoist is used a ladder must be at hand ready for use in case the hoist fails.

The Masters of small, "all-aft" ships, in which the main deck is frequently awash when a Pilot is being shipped or landed, or of any type of ship in which the bulwark rails are below the deck of the pilot vessel coming alongside, are asked to provide a boarding platform on each side of the forward end of the raised quarter deck and on the same level as that deck.

The platform should be easily accessible from the quarter deck and should have adequate handrails, those on the outboard side being portable. Fittings should also be provided for the rigging of a pilot ladder. When a pilot ladder is rigged from a boarding platform the top rung of the ladder should be not less than 12 in. nor more than 15 in. below the level of the platform. The top of the ladder should be secured at least 3 ft. 6 in. above the platform in such a way as to make a safe handhold for the Pilot entering or leaving the platform.

If a pilot ladder is unsafe a Pilot may refuse to board, thus delaying the ship. If the ladder is unsatisfactory for boarding the Master of that ship renders himself liable to a fine of double the amount of the pilotage dues involved, for failure to comply with the pilotage act 1913; and if the ladder does not meet the statutory requirements, the Master renders himself liable to a fine not exceeding £50 in accordance with the Merchant Shipping Act 1894.

RESTRICTIONS: Certain restrictions are placed on the navigation of vessels carrying petroleum, chemicals, explosives and other hazardous commodities.

Vessels which are carrying any of the above mentioned cargoes should call Gravesend for details of these restrictions and ascertain whether it is permitted for them to navigate.

Notwithstanding any of the aforementioned restrictions, all vessels should comply with the "General Directions for Navigation in the Port of London 1975". (Copies obtained from the Director of Marine Operations, Port of London Authority, Thames House, Gallions Entrance, London, E.16.).

The tides at London Bridge have a range of 4.6 m. at mean neeps and 6.6 m. at mean springs.

The sea approach to Shellhaven is dredged to allow the passage of vessels to 13.7 m. at mean neap tides. The depth to Gravesend Reach is about 7.9 to 8.1 m. below LAT.

THAMES NAVIGATION SERVICE:

Traffic Co-ordination Centre, Gravesend: This centre programmes all movements within the port, including the docks. All information required by the Authority regarding ETA, ETD, etc., should be passed through this centre. Also deals with all matters concerning provision of tugs in docks, floating derricks, dummy pontoons, or other services for vessels in dock, moorings in the river and any enquiry reference bye-laws, regulations, etc.

Gravesend Radio: VHF R/T Channel 16, Working Channels 12 and 20.

Radar coverage – Erith to Tongue Anchorage. Information supplied on request.

All vessels to report to this station on entering the port or before leaving the berth and whilst manoeuvring in the River. Also report position at stated intervals at points laid down in Notice to Mariners.

Tidal heights – Tilbury to Estuary given on request and included in navigation broadcast given every 30 minutes on the hour and half-hour.

Warden Point Radar: VHF and radar coverage for Thames Estuary from Southend to outer limits. Channels 12, 16 and 18 on direction from Gravesend.

Gallions Radio: VHF Channel 16; Working Channels 14 and 22; coverage of Gallions Reach. All vessels entering the area above Crayfordness leaving the berth, manoeuvring and whilst on passage, report to this station.

Navigation broadcast given every 30 minutes at 15 and 45 minutes past the hour.

Receives advance warning of intention to pass through Thames Flood Barrier Diversionary Channel (see below).

Tidal heights at Royals given on request.

Barrier Control: VHF Channel 22. Radar coverage Woolwich Reach; Blackwall Reach to Fords (proposed). This station is situated adjacent to the Thames Barrier on the south side of Woolwich Reach. It exercises traffic control over ALL vessels and craft wishing to proceed through the Barrier Control Zone which extends from Margaretness to Blackwall Point. All vessels intending to navigate through the northern diversionary channel must pass their ETA's to Gallions Radio on VHF Channel 14 when:

(a) Passing Crayfordness Point inward bound.

(b) On leaving a berth which lies between Crayfordness Point and Margaretness Point inward bound.

(c) When clearing Tower Bridge outward bound.

(d) On leaving a berth or lock between Tower Bridge and Blackwall Point outward bound.

For full details regarding traffic control in the Thames Barrier Control Zone see Notice to Mariners No. 5 of 1978. Vessels wishing to leave from a berth within the Barrier Control Zone should first obtain permission to proceed.

Patrol Service: 24-hour patrol by launches fitted VHF Channels 16, 14, 12, 6 and radar. Can be contacted through Gravesend or Gallions Radio.

Liaison is maintained through the Thames Navigation Service with Owners, Agents, Pilots, Watermen and all emergency services.

For help, advice, assistance or any matter affecting ships and shipping, contact: Thames Navigation Service:

Traffic Co-ordinator	Gravesend 60311
Duty Officer	Gravesend 68111
Duty Officer, Gallions	01-476-7801

ANCHORAGES: Great Nore and Little Nore anchorages allocated by Medway Port Operations, all other anchorages allocated by the Thames Navigation Service dependent upon the size and draft of vessel, the length of stay required at the anchorage and the specific details of the vessel, i.e. explosives, petroleum, etc.

MAX. SIZE: Tankers:

Berth	*Depth at low water*	*Size-length*
Coryton	14.0 m. maximum	1,100 ft.
Shellhaven	14.6 m. maximum	1,200 ft.
Holehaven	11.2 m. maximum	720 ft.
Purfleet	8.6 – 11.2 m. maximum	700 ft.
Grays	11.2 m. maximum	620-750 ft.

Other river and tanker berths restrictions apply according to tides and berth.

Deep-draft tankers for berthing at Shellhaven is sometimes over a period of 2 tides. Passage on the 1st tide to deep water anchorage, vessel to leave anchorage on make of 2nd tide and arrive off the installation half an hour before high water of this tide.

HEALTH: No automatic pratique, or radio pratique given. The London Maritime Declaration of Health Form which is normally handed to the ship by the Pilot boarding vessel is to be completed and strictly complied to. Any doubts can be clarified by VHF to Thames Navigation, Gravesend, who will connect to the Port Doctor, or to "Northforeland Radio". Pratique is issued by the Customs at the berth after health requirements adhered to, and must be retained on board or if doctor boards at Gravesend.

Also see "Health – All Ports" before first U.K. port.

RADIO: Outside UK waters from the South call long range station "Portishead Radio"; approaching London, "Niton Radio" or Northforeland Radio giving Agents draft and ETA.

TUGS: Tugs usually pick up vessels for Shellhaven and Holehaven in reaches approaching berth, or Gravesend for berths/docks up river. Tug lines can be hired to ships.

BERTHING:

Cargo Berths: The Port of London Authority operate the three enclosed dock systems:–

India & Millwall Docks
Royal Docks
Tilbury Docks (Essex)

Facilities for general cargo handling, Roll-on/Roll-off and container handling can be provided in each dock system according to specific requirements. In particular the PLA operate deepwater, common user container, forest products and Roll-on/Roll-off facilities at Tilbury Docks.

The Tilbury riverside grain terminal is capable of handling vessels up to 83,000 tonnes. Enquiries for services should be made to:

The Co-ordinator of Marketing & Operations,
North Side, Royal Victoria Dock, London E16.

In addition tenants provide facilities within Tilbury Dock as follows:–

Containers Lo/Lo: Northfleet Hope Container Terminal – Tilbury Container Services.

Forest Products: Canadian Transport Terminals Ltd. – No. 42 Berth.

Forest Products: Seaboard Pioneer Terminal Ltd. – No. 46 Berth.

Forest Products/Ro-Ro: Svenska Terminal in London Ltd. – No. 44 Berth.

Container/Ro-Ro: Brostrom Cargo UK Ltd. – Nos. 25/26 Berth.

General Cargo/Container/Ro-Ro: West Africa Terminal Ltd.

Depths of water available upon request.

River Cargo Berths: Privately operated ships handling facilities are provided on the riverside as follows:

Victoria Deep Water Terminal.

Iron Ore

Fords Jetty, Dagenham	depth 4.6 m.

Latex		
Tilbury Cargo Jetty	,,	8.2 m.
Cement		
Wouldhams No. 3 Jetty	,,	4.6 m.
Bevans Northfleet	,,	7.6 m.
Whites Wharf, Swanscombe	,,	6.1 m.
Alpha Jetty, Cliffe	,,	8.2 m.
Tunnel Cement, Purfleet	,,	9.2 m.
APCM Greenhithe	,,	5.5 m.
Sugar		
Thames Refinery, Silvertown	,,	8.2 m.
Paper and Liner Board		
Purfleet Deep Wharf	"	7.5 m.
Tower Wharf	"	6.31 m.
Imperial Papers Mills	,,	8.6 m.
Empire Paper Mills	,,	6.1 m.
Erith Deepwater Jetty	,,	3.4 m.
S. Williams No. 4 berth	,,	9.8 m.
Convoys Deptford	,,	4.3 m.
New Northfleet Wharf	,,	7.6 m.
Bowaters Northfleet	,,	7.6 m.
LPG (Methane)		
North Thames Gas Board, Canvey	,,	10.6 m.
Fertilisers		
BOCM, Erith	,,	7.6 m.

The depths quoted are to be taken as approximate only. For detailed information contact the wharf operator or Thames Navigation Service.

TANKERS: There are about 40 berths for tankers in the Thames District, main terminals of which are listed below. Recommended that Masters cable terminal with discharge manifold size, enabling wharf have correct pipes ready. Slop tanks are available at most wharves.

Regent			
Upper	depth	alongside	12.2 m.
Lower	,,	,,	8.6 m.
L.C.O.W.	,,	,,	10.6 m.
Coryton			
No. 1	,,	,,	9.2 m.
No. 2	,,	,,	4.0 m.
No. 3	,,	,,	12.4 m.
No. 4	,,	,,	13.8 m.
Shellhaven			
Berth A	,,	,,	12.4 m.
,, B	,,	,,	14.6 m.
,, C	,,	,,	10.4 m.
,, D	,,	,,	4.3 m.
,, E	,,	,,	8.8 m.
,, F	,,	,,	3.4 m.
,, G	,,	,,	8.2 m.
,, H	,,	,,	9.8 m.
,, J	,,	,,	10.4 m.
,, K	,,	,,	3.4 m.
,, L	,,	,,	9.4 m.
,, M	,,	,,	9.4 m.
Wouldhams			
No. 1	,,	,,	11.0 m.
No. 2	,,	,,	11.0 m.
West Thurrock Oil Terminal			
No. 1	"	"	7.3 m.
No. 2	,,	,,	7.3 m.
Purfleet			
Shell Mex. No. 1		,,	8.6 m.
Esso No. 1	,,	,,	8.6 m.
No. 2	,,	,,	8.6 m.
Cory's	,,	,,	10.6 m.
Harrisons	,,	,,	6.1 m.
S. Williams No. 5		,,	8.0 m.
Cliffe			
Jet Jetty	,,	,,	13.4 m.

BRIDGES: No bridges below Tower Bridge which opens for shipping on request.

STEVEDORES: Ordered by the Agents; no ETA to stevedores from vessel necessary; labour to be ordered by 1200 hrs. day before required.

MEDICAL: Not necessary to contact Agents once port health requirements satisfied unless urgent medical treatment required on board on arrival. All medical treatment, vaccinations available.

DENSITY: Varies according to position and tides.

FRESH WATER: Available at all berths either from shore or barge.

FUEL: All types, grades available by barge, or from terminals.

FIRE PRECAUTIONS: Tankers – no smoking on open decks, only cabins. Deck fire hoses to be connected. Explosive workings at Chapman anchorage, same precautions. Red flag to be flown by these vessels. Fire tug to be in attendance when explosives being worked. Smoking not permitted in the docks or berths.

GANGWAY/DECK WATCHMEN: Available but not compulsory, Master's discretion.

OPENING/CLOSING HATCHES: Liner vessels by crew, with stevedore assistance. Tramp vessels according to charter party.

CUSTOMS ALLOWANCE: Customs usually permit 200 cigarettes or 0.25 lb. tobacco per person on board for 4 days. They can refuse to issue duty free or amount allowed at their discretion. Usually permit 1.3 pints or 1 bottle spirits per person for 4 days. They can issue less or refuse to allow as duty free at their discretion.

CERTIFICATES: These certificates to be on board.

- Ship's Register.
- Load Line.
- Safety Radio.
- Safety Equipment.
- Safety Construction.
- Derat. Exemption.
- Previous U.K. Light Due Bills.
- Cargo Gear and Chain Register complying to U.K. Factory Acts.
- British Tonnage Certificate if available.

CARGO GEAR: To comply with U.K. Factory Acts, valid chain and Cargo Gear Register to be on board. Stevedores usually supply cargo slings, etc.

IDENTIFICATION CARDS: Seamen's identity book required to be retained on board in port.

CONSULS: All British Commonwealth countries are represented in London by a High Commissioner's Office.

Most foreign countries maintain embassies or a consular representative in London.

REPAIRS: All repairs, gas freeing possible; pre-advice recommended.

DRY DOCKS: Largest dry docks at Tilbury, 752 ft. length, 133 ft. breadth; King George Docks, 750 ft. length 128 ft. breadth. There are smaller dry docks available.

REPATRIATIONS: All facilities exist for changing crews, repatriations.

AIRPORTS: All flights serve London Airport, about 18 miles from centre of London. Gatwick and Southend Airports serve local and Continental services also.

TIME: British Standard Time which is 1 hour in advance of GMT. GMT during Winter months.

HOLIDAYS: No work is available on official holidays usually. Official Days: 1st January; Good Friday; Easter Monday; Whit. Monday; August Monday; Christmas Day; Boxing Day. Some weekend work is possible at certain berths only, at overtime rates.

POLICE/AMBULANCE/FIRE: Contact by telephone; dial 999 and ask for service needed.

TELEPHONES: Ship to shore connections available at most berths.

SERVICES: All types of service for navigational aids, radar, compass adjusting, nautical instruments repaired, slop discharge barges available. Tank-cleaning, gas-freeing services available.

SHORE LEAVE: Crew members allowed ashore but must rejoin on sailing.

REGULATIONS: No livestock allowed ashore without permission Customs and Port Health Authorities.

AUTHORITY: Port of London Authority.

AGENT: Lambert Brothers Ship Agencies Limited, 193-207 High Road, Ilford, Essex. Telegrams: "Lambert Ilford" and "Lambert London EC3". Telex: 897147 and 897435. Tel.: 01 553-3311.

LONDONDERRY (incl. Moville): 55.00 N. 07.20 W.

(See Plan Book)

The main port of Londonderry is situated about 21 miles from the sea on the River Foyle.

PORT LIMITS: Extend from Lifford Bridge to a line drawn from Greencastle Fort in the County of Donegal to the Tower on Magilligan Point in the City and County of Londonderry.

DOCUMENTS: For Londonderry see "Belfast". For Moville see "Dublin".

Since the Port of Londonderry falls within the Republic of Ireland and the United Kingdom, both Governments are concerned in regard to Customs documents. Moville, which is situated down river from Londonderry, is located in the Republic of Ireland and is the anchorage where deep-sea vessels lie prior to proceeding to Londonderry. Should vessels discharge cargo or load cargo at this anchorage, Irish documents are required. The port is under the control of the Londonderry Port and Harbour Commissioners who are recognised by both Governments.

PILOTAGE: The Londonderry Port and Harbour Commissioners are the Pilotage Authority for the Londonderry Pilotage District. For information regarding pilotage application should be made to The Secretary, Harbour Office, Londonderry, Northern Ireland.

Pilotage is compulsory, vessels taking the Pilot at the Foyle Buoy or Fairway Buoy, about 2.5 miles N.E. from Dunagree Point, Innisshowen Head.

The Pilot station is located at Carrickarory Pier, Moville, 55° 10' 57" N.; 07° 03' 27" W.

Deep-sea vessels usually take Pilot 2 hours before High water time Londonderry, so as to arrive at Londonderry on the top of High Water.

Pilotage service may be obtained in response to following signals:

Inward-bound vessels: By day. 1. The International Code Signal G; 2. The International Code Signal P.T.; 3. The Pilot Jack hoisted at the fore; 4. By daylight signalling lamp to the pilot station. If required after hours telephone Pilot Station direct. Tel. Moville 92.

By night. 1. The pyrotechnic light, commonly known as a blue light; 2. A bright white light flashed or shown at short or frequent intervals just above the bulwarks for about a minute at a time; 3. The International Code Signal P.T. by flashing; 4. By signalling lamp to the Pilot Station.

By day or night. 1. By VHF (FM) radiotelephony to the pilot station at Carrickarory Pier. 2. By VHF (FM) radiotelephony to the pilot launch "Foyle Leader."

In poor visibility. By sounding the letter G in Morse Code on the steam whistle or siren.

As visibility to seaward from Carrickarory Pier is restricted it is important that Owners, Masters or Agents notify the Harbour Master (tel. Londonderry 63680) or outside Office hours the Pilot station (tel. Moville 92) of the name of vessel; estimated time of arrival at the Fairway Buoy; draft of water of the vessel. It is also important that VHF (FM) communication be established with pilot station or pilot launch "Foyle Leader" as early as possible before arrival in Lough Foyle. Call signs, frequencies and procedure are as follows:

VHF (FM) Communications:

1. Pilot Station at Carrickarory Pier, Moville: Call sign "Foyle Pilots". Equipment VHF (FM) R/T single frequency working. A continuous listening watch is kept on Channel 16 (156.80 mc/s.) except when pilot launch is operating, when watch is transferred to the launch. When communication has been established on Channel 16 (calling and safety channel) operators should switch to Channel 12 (156.60 mc/s.)

2. Pilot launch: Name of vessel "Foyle leader". Call sign MIBC Equipment VHF (FM) R/T single frequency working. When launch is operating a listening watch is kept on Channel 16 (158.80 mc/s.). When communication has been established on Channel 16 (calling and safety channel) operators should switch to Channel 6 (156.30 mc/s.).

3. Harbour Office, Londonderry: Call sign "Harbour Office" Equipment VHF (FM) R/T single frequency working. All vessels fitted with VHF (FM) R/T while navigating in the river or at anchor in Moville Bay should keep a listening watch on Channel 16 (156.80 mc/s.). When communication has been established on Channel 16 (calling and safety channel) Operators should switch to Channel 12 (156.60 mc/s.).

Messages must be restricted to those related to the movement of vessels and safety of vessels and persons. Messages of any other nature and messages of a personal character cannot be accepted.

Outward-bound vessels and vessels shifting:

When the services of a Pilot are required for an outward-bound vessel or for shifting a vessel, 2 hours notification should be given to Harbour Master (tel. Londonderry 63680) during office hours, of name of vessel; time of departure; draft of water of vessel; where bound. Early notification should be given to enable Pilot to board vessel in good time.

ANCHORAGES: The only anchorage at Londonderry is located at Moville.

MAX. SIZE: For vessels using main port of Londonderry, overall length 500 ft., draft (salt water) 23 ft. 6 in., beam 60 ft.

For vessels using E.B.N.I. Oil Jetty, Coolkeeragh, Londonderry, overall length 600 ft., draft (salt water) 23 ft. 6in.

Maximum draft of ships is increased to 24 ft. on Spring tides at Coolkeeragh and Londonderry.

HEALTH: Pratique is automatic except in the case where the Master suspects one of the dangerous diseases on board when he should notify the Agent.

Also see "Health – All Ports" before first U.K. port.

RADIO: Malin Head Radio Station, Republic of Ireland, covers W/T transmissions and Portpatrick Radio Station, Scotland, covers R/T transmissions.

TUGS: One tug is available which is under the control of the Londonderry Port and Harbour Commissioners.

BERTHING: Vessels of deep draft or large dimensions can only berth at Londonderry to arrive on top of high water. Decisions in this matter are taken by the Pilots in conjunction with the Harbour Master.

The reconstruction in ferro-concrete of 300 ft. of existing wharf at Coal Cranes Berth, Queen's Quay, made a total length of ferro-concrete wharves of approximately 2,000 ft. All berths have been dredged to give depth of 25 ft. at LWOST.

The Commissioners have also completed reconstruction in ferro-concrete of Berth 15.

The port is especially adapted for shipment of live stock on large scale. The pens for reception of cattle, sheep and pigs for inspection by Government veterinary officers before shipment are situated close to shipping berths, and are completely roofed over for protection of animals. (It is likely that this facility will close end of 1978).

STEVEDORES: ETA advices should be given before 1600 hrs. on week-days to arrange work for the next morning and before 1100 hrs. on Saturday to arrange work for Monday morning.

MEDICAL: Doctors and hospital facilities available. Agents should be advised in advance of any medical attention required.

TANKERS: No slop facilities available. Deep-sea tankers discharge heavy fuel oil for electricity power station at E.B.N.I. Jetty, Coolkeeragh, diameter of pipes 8 in. Crew are required to connect and disconnect hoses under port conditions.

DENSITY: Water at Londonderry is brackish and average density 1015 to 1018.

FRESH WATER: Available at all berths direct from shore lines.

FUEL: Gas-oil and light marine diesel available by road tankers. Shell Mex and B.P. can supply light, medium and heavy fuel oil by road tanker.

GANGWAY/DECK WATCHMEN: Can be covered by crew; shore watchmen available if required.

OPENING/CLOSING HATCHES: This is required to be carried out by ship's crew under local port labour conditions.

CARGO GEAR: Ship's winches and derricks should be in good working order and have BOT Certificates or equivalent. Winches are also required to plough grain on grain vessels. Cluster lighting is required for night work.

IDENTIFICATION CARDS: Not obligatory but should be carried.

CONSULS:

Portugal Vice-consul – A. Mackenzie, Esq., 22 Strand Road, Londonderry. Tel. 62033.

Norway Vice-consul – A. Mackenzie, Esq., 22 Strand Road, Londonderry. Tel. 62033.

Norway – Under the Nordic Treaty, Norway also acts for Denmark, Finland, Iceland and Sweden.

REPAIRS: Deck and engine repairs are carried out by a local engineering works. No major repairs available.

REPATRIATION: Can be arranged by ship's Agent on request.

AIRPORT: The nearest airport to Londonderry is Aldergrove (Belfast) Airport, which is 80 miles from Londonderry.

HOLIDAYS: Port Holidays at Londonderry are: St. Patricks Day (17th March); Easter Monday; 1st Monday and Tuesday in August; Christmas Day and Boxing Day.

POLICE/AMBULANCE/FIRE: Dial 999 and ask for service required, or Police 65161; Ambulance 65171; Fire 61815.

TELEPHONES: No telephones available for connecting on board.

SERVICES: No tank cleaning available or facilities for discharging of tank-washings. Compass adjusters available from Glasgow.

REGULATIONS: Copies of Port Bye-Laws may be obtained through Agent.

AUTHORITY: The Londonderry Port and Harbour Commissioners.

LOWESTOFT: 52.29 N. 01.45 E.

DOCUMENTS:

Crew List (at least 2 copies).
Passenger List (at least 2 copies).
Manifest (at least 3 copies).
Customs & Health Documents (normal U.K. regulations).
Ship's Papers (to be presented to Customs or Port Authorities).

PILOTAGE: Pilots on standby at all times. Pilot launch fitted with VHF and maintains listening watch on Channel 16. Pilots can also be ordered by RT via Humber and Northforeland Radio, hence by phone.

Pilot's private telephone no. Lowestoft 4970 or Lowestoft 61976, or at the Lowestoft Harbour Masters Office, tel. Lowestoft 2286 (this number manned 24 hours). Pilot boat, black hull, white upper work with "Pilot" painted on each side. Light and sound signals as laid down in the International Code of Signals.

Pilot boards vessel at West Holm buoy or East Newcome buoy. Vessel should not approach harbour closer than these limits when awaiting Pilot.

ANCHORAGES: Pilotage anchorage North of a line joining West Holm buoy and Lowestoft Lighthouse.

RESTRICTIONS: No specific restrictions provided the height of tide is sufficient for draft of vessel. Large vessels normally enter on high water slack tide due to cross currents at entrance.

There are regulations governing the passage of vessels through the harbour entrance. Masters of vessels shall observe the Harbour Control Light which is a white flashing light situated below the fixed red light on the South Pier Lighthouse. This light is visible except between 232° to 286° true from the light. When this light is flashing vessels may proceed to sea, but no vessel shall enter the harbour. At all other times vessels may enter the harbour, but no vessel shall proceed to sea.

A green light is shown on the North Pier head and a red light on the South Pier Head, from sunset to sunrise. A green light is shown from sunset to sunrise on each of the Inner Pier Heads. These lights will become visible to the person in charge upon his vessel entering the harbour. A reed signal is fixed on the South Pier Head for use in foggy weather, 4 blasts of 2 seconds each will be given every minute.

MAX. SIZE: Max. length approx. 300 ft. Draft 16.5 ft. MHS.

HEALTH: See "Health – All Ports" before first U.K. port.

TUGS: 2 tugs are available; tug's lines normally used.

BERTHING: *Outer Harbour* (comprising Hamilton and Waveney Docks and Trawl and Yacht Basins). Used largely for fish traffic:

Width at entrance	150 ft.
Depth at entrance	22 ft. MHWS
Water area	40 acres
Length of quays	4,500 ft.
Depth of water at quays	18 ft. MHWS
	12 ft. MLWS

Inner Harbour. Used for general cargo and grain traffic.

Water area	70 acres
Length of quay	6,500 ft.
Depth of water at quays	20 ft. MHWS
	14 ft. MLWS

STEVEDORES: Shipping Agent should be advised of ETA, etc., to enable gangs to be available.

MEDICAL: Advance notice desirable of medical attention required on arrival. Hospital facilities available in Lowestoft.

FRESH WATER: Can be supplied at various points on quays from hydrants with waterman in attendance. Normal hours 0800 to 1700 hrs. Monday to Friday, outside those hours overtime rates payable. Approx. flow 15 t.p.h.

FUEL: Marine diesel available from road tankers or fuelling points within the docks. 24 hours notice is normally required for supplying gas oil or boiler fuel; this comes from road tankers.

FIRE PRECAUTIONS: Local fire services available in an emergency. Special arrangements can be made for taking fire-fighting equipment to sea. Normal harbour fire-prevention regulations apply to all berths.

OPENING/CLOSING HATCHES: Carried out by crew.

CONSULS: Belgium tel. Lowestoft 2301
Denmark ,, ,, ,,
France ,, ,, ,,
Netherlands ,, ,, ,,
Norway ,, ,, ,,

REPAIRS: All types of deck and engine repairs are possible in the port.

DRY DOCKS: One dry dock. Length 248 ft. Width at entrance 48 ft. Depth of water on sill 13.5 ft. MHWS.

AIRPORTS: Nearest international airport served by regular airlines is London (Heathrow). Smaller airport at Norwich (27 miles) not served by regular airlines.

POLICE/AMBULANCE/FIRE: In an emergency dial 999 and ask for service required. For normal enquiries: Police Lowestoft 2121; Ambulance Lowestoft 2572; Fire Lowestoft 2227.

GENERAL: Helipad on Dock Estate, also Heliport at Beccles (8 miles away).

Air/Sea Rescue Services at R.A.F. Cottishall (35 miles).

Royal National Lifeboat Institution, lifeboat berthed at Lowestoft.

200-ton crane available for heavy lifts.

Modern transit sheds, cattle lairage facilities.

SERVICES: Compass adjusting. VHF, Radar, radio repairs. All ships' provisions are available by arrangements with the shipping Agencies.

SHORE LEAVE: Leave is permitted.

AUTHORITY: British Transport Docks Board.

MANCHESTER: 53.29 N. 02.14 W. (See Plan Book)

GENERAL: The port of Manchester includes the whole of the Manchester Ship Canal and Queen Elizabeth II Dock. The Canal is approximately 36 miles long from its entrance at Eastham on River Mersey to the Manchester Docks.

DOCUMENTS:

1 Maritime Declaration of Health.
1 Crew Effects List.
2 Ship's Report by Master.
1 Home Office Form 1B6.
1 Stores List.
1 Certificate of Deck Cargo Tonnage.
1 Grain Certificate.
1 Light Certificate.
1 Port Dues Certificate.
1 Passenger List.
1 Landing Card for each Passenger.
Ship's Certificate of Registry.
Mercantile Marine Office Certificate – for British ships only.
Load-Line Certificate.
Safety Equipment Certificate.
Lloyds Certificate.
Derat Certificate.
Ship's Register.
Light Bills.
Safety Radio Certificate.

In addition, Manifests and Bill of Lading are usually sent to Agent direct from loading port.

PILOTAGE: Non-compulsory. Orders for Pilots may be lodged with the Pilotage Office at Eastham (Tel. 051-327 1233) or at Dock Office at Manchester (Tel. 061-872 2411, ext. 2174). As much notice as possible should be given, particularly in the case of inward-bound vessels due to arrive at Eastham. Helmsmen can be obtained in same manner.

RESTRICTIONS: Eastham Locks. The main entrance to the Canal is at Eastham where there are two locks side by side, one 600 ft. by 80 ft., and the other 350 ft. by 50 ft. The outer or lower sill of each lock is 11.36 ft. below Chart Datum (1975). The levels of upper sills of the 80 ft. and 50 ft. locks are 32 ft. and 29 ft. respectively below statutory water level in Canal.

Both locks are operated for incoming and outgoing vessels of suitable draft during a period of 8 hours on each tide, i.e. from 4 hours before high water to 4 hours after high water.

The Canal is constructed to give an available depth of water of 30 ft. from Eastham to Ince Oil Berth (5.375 miles) and of 28 ft. from Ince to Manchester Docks.

The size of vessel which can navigate the Canal is governed by the dimensions of locks, the height of fixed bridges and limitations for the draft of vessel.

Maximum length: The greatest length measured between perpendiculars drawn at the foreside of the foremost extremity and at the afterside of the aftermost extremity of the hull or any attachments to the hull shall not exceed 560 ft. The acceptance of ships proceeding above Ince with overall length greater than 530 ft. is subject to approval of the Harbour Master.

The length measured between perpendiculars drawn at the foreside of the stern and at the afterside of the rudder post, or through centre of the rudder stock if there is no rudder post, on the Summer load water-line shall not exceed 535 ft.

The length measured between perpendiculars drawn at the afterside of the rudder plate and at the foreside of the foremost extremity of any part of the hull which is below a horizontal line drawn through the top of the rudder plate shall not exceed 544 ft.

Maximum beam: Vessels not proceeding beyond Ince Oil Berth: 72 ft. overall. Vessels proceeding beyond Ince Oil Berth: 63 ft. 6 in. overall.

Provided the height of masts and/or funnels or other structures is not more than 70 ft. 9 in. from water-line, vessels can pass under all fixed bridges under normal conditions. As, however, the headroom is less during periods of high-water levels, a vessel, in order to avoid possible detention, should reduce masts and funnels or other structures to 70 ft. above the water-line. The restriction as regards height does not apply to vessels proceeding only as far as Runcorn Bridge.

Facilities are available at Eastham for removing and replacing tops of masts and funnels.

MAX. SIZE: When vessels are Loading inwards for the canal Masters should take these facts into their calculations and have regard to the following limitations, all of which are expressed as maximum draft in fresh water:

Vessels inward bound to a berth	*Arrival draft at Eastham not to be such as would exceed:*	
Between Eastham Locks and Ince Oil Berth	28 ft. 10 in.	in fresh water
Between Ince Oil Berth and Manchester Docks (other than Pomona Docks and Runcorn Docks)	26 ft. 06 in.	
To or from Pomona Docks (for coastwise shipping)	14 ft. 00 in.	

Vessels loading outwards at any point between Eastham Locks and Ince Oil Berth should not have a draft exceeding 28 ft. 6 in. upon completion of their loading in this section.

Vessels loading outwards at any point between Ince Oil Berth and Manchester Docks (other than Pomona Docks and Runcorn Docks) should not have a draft exceeding 26 ft. 6 in. upon completion of their loading in this section.

Large vessels can swing in the basins at Stanlow and Manchester Docks. Small vessels can swing at certain other points on the Canal.

HEALTH: Foreign arrivals to complete Maritime Declaration of Health. They are cleared immediately on arrival by either a port doctor or an officer of H.M. Customs depending on where ship comes from and whether there is sickness on board.

Vessels arriving from ports within accepted area (N. European ports) and coastal arrivals need not present Declaration in all cases; when there is sickness on board the Port Health Authority must be informed preferably not more than 12 hours and not less than 3 hours before arrival.

Also see "Health – All Ports" before first U.K. port.

TUGS: The Canal Company maintains a fleet of high-powered tugs which may be hired to assist vessels, 12 hours notice required.

BERTHING:

Locality	*Miles above Eastham*	*Bank N–North S–South*	*Total Length in feet*
Queen Elizabeth II Dock	—	S	3,155
Eastham Laybyes	—	N	645
Eastham Laybyes	—	S	1,560
30-ton Crane Berth	0.50	S	600
Bowater's Wharf	2.00	S	1,100
Ellesmere Port	2.875	S	2,250
Associated Octel Wharf	4.00	S	600
Stanlow Oil Docks Nos. 1 & 2	4.50	N	2,070
Stanlow Laybye	4.625	S	600
Shell Company of the United Kingdom Ltd., Ince Coaster Berth	5.25	S	352
Shell Company of the United Kingdom Ltd., Ince Oil Berth	5.375	S	600
Ince (C.E.G.B.) Berth	5.50	S	600
I.C.I. Salt Berth	11.25	S	500
Runcorn Docks	12.25	S	7,500
National Coal Board, Acton Grange Wharf	17.50	N	300
Warrington Wharf	19.00	N	350
Partington	27.375	N	1,885
Partington	27.375	S	1,236
Lancashire Steel Manufacturing Co. Ltd., Iriam Wharf	27.75	N	600
Barton Oil Berth	31.875	S	508
Irwell Park Wharf	32.25	N	1,100
Eccles Oil Wharf	32.50	N	600
C.P.C. Wharf	32.75	S	700
Weaste Oil Wharf	33.25	N	557
Southern Oil Wharf	33.625	N	500
Esso Petroleum Co. Ltd. Wharf, Mode Wheel	33.75	S	934
Manchester Docks (including Pomona Docks)	34.50	N & S	29,875

CARGO HANDLING FACILITIES: Heavy duty floating cranes with capacity up to 120 tonnes. Roll-on/Roll-off berth with strengthening to take loads of 300 tonnes.

Two floating grain elevators, capacity 250 t.p.h. each and additional elevators at private wharves. Transporter cranes for containers with capacity of 35 tonnes and 25 tonnes.

RADIO: FM VHF R/T equipment is installed at Eastham, Stanlow, Latchford and Manchester Docks as an aid to navigation on the Canal.

Ships which are equipped with the appropriate R/T channels are requested to establish contact with the nearest shore station before leaving a berth or lock within the harbour and thereafter to maintain a continuous listening watch on Channel 14.

Station	*Call sign*	*Channel*	
Eastham Locks	Eastham Locks	7	Docking instructions when approaching Eastham Locks from seaward.
Eastham Locks	Eastham	14	Port operations
Stanlow Oil Docks	Stanlow	14 20	Vessels moving within the harbour should maintain a listening watch on channel 14. After contact has been established the shore station will request the ship to switch to the appropriate speech channel.
Latchford Locks	Latchford	14 20	
Manchester Dock Office	Dock Office	14 18	
Ship/tug Communications	Name of ship/tug	8 10	Inward bound Outward bound

STEVEDORES: The stevedores require to sight a certificate covering inspection and S.W.L. of slings used in pre-slung cargoes.

TANKERS: *Queen Elizabeth II Dock.* This dock is adjacent to the locks at Eastham which give access to the Canal, and is approached from River Mersey through its own entrance lock. This lock is 807 ft. long by 100 ft. wide. The level of outer sill is 18.36 ft. below Chart Datum (1975). The dock covers an area of 19 acres in the form of a square and has four berths designed to accommodate large tankers, the dimensions of berths being as follows:

Berth No. 1 800 ft. Berth No. 3 900 ft.
Berth No. 2 725 ft. Berth No. 4 730 ft.

The dock is directly connected to oil installations by pipe-lines.

Stanlow Oil Docks. No. 1 & 2 (5 berths) 4.5 miles above Eastham Lock. Length 560 ft., draft 28 ft., beam 72 ft.

Ince Oil Berth. 5.5 miles above Eastham Lock. Length 560 ft., draft 28 ft., beam 72 ft.

Barton. 32 miles above Eastham Lock. Length 508 ft., draft 26 ft., beam 63 ft. 6 in. Max. height above water-line 70 ft.

DENSITY: The water in lower section of the Canal between Eastham Locks and Latchford Locks is brackish. In all sections above Latchford Locks the water is fresh.

MEDICAL: Doctors and hospital facilities available. Agent should be advised in advance of any medical attention required.

FUEL: At Partington, coal tips are available for the loading of cargo coal, etc., and bunkers to vessels. Oil bunkers may be taken by arrangement with oil companies either from craft alongside or at various oil berths along the Canal.

DRY DOCKS: The Manchester Marine Limited operates three graving docks at Manchester Docks:

No. 1 Dock – length 535 ft., width 65 ft., depth of water on blocks 20 ft. 3 in.

No. 2 Dock – length 500 ft., width 65 ft., depth of water on blocks 18 ft.

No. 3 Dock – length 450 ft., width 65 ft., depth of water on blocks 19 ft.

CUSTOMS ALLOWANCE: At discretion of local Customs Inspector. Normal allowances are equivalent to 0.5 lb. tobacco per man and equivalent to 1 bottle of wine per man. Allowances may be halved for home trade vessels. Vessels in port for more than three or four days may receive extra allowances.

CONSULS:

Austria
Bangladesh
Belgium
Bolivia
Denmark
Dominican Republic
Finland
France
Germany
Greece
Iceland
Italy
Jamaica
Latvia
Lebanon
Liberia
Monaco
Netherlands
Norway
Portugal
Spain
Sweden
Switzerland
U.S.A.
Venezuela

TIME: British Standard Time is GMT plus 1 hour. Reverting to GMT during Winter months.

HOLIDAYS: Good Friday (variable date); Easter Monday (variable date); Spring Bank Holiday (variable date); August Bank Holiday (variable date); Christmas Day (25th December); Boxing Day (26th December).

POLICE/AMBULANCE/FIRE: Dial 999 from any telephone and ask for service required.

AUTHORITY: The Manchester Ship Canal Company.

AGENT: W. J. Roberts & Son (Shipping) Ltd., 734 Tower Building, Water Street, Liverpool, L3 1BR. Tel: 051-236 7832/4. After hours. Tel: 051-525 2398, 051-677 6303. Telex: 627137. Cables: "Attention Liverpool 3".

MEDWAY PORTS

(A) MEDWAY
(B) SHEERNESS
(C) ISLE OF GRAIN
(D) ROCHESTER
(E) OTHER FACILITIES
1. BEE/NESS JETTY
2. BLOORS WHARF
3. FAVERSHAM
4. KINGSNORTH JETTY
5. OAKHAM NESS JETTY
6. OTTERHAM QUAY
7. QUEENSBOROUGH
8. RIDHAM DOCK

(A) MEDWAY (See Plan Book)

PILOTAGE: *Folkestone.* Vessels for River Medway that are approaching from the South obtain Inward Sea Pilot at Folkestone Pilot Station. Telex: 96381. Tel. Folkestone 56766. Telegraphic Address: "Pilots, Folkestone". Notice required: preferably 24 hours notice ETA, then confirmation 12 hours prior arrival with ETA, draft, gross tonnage and destination.

Pilot boards from launch 1 mile South of Folkestone Pier. Contact Pilots by VHF Channel 16, then 9, two hours before arrival (call sign "Folkestone Pilots Radio").

Deep drafted vessels can be provided with Pilots in deeper water by arranging to be met by the Sunk Pilot Vessel in a suitable position about 3 miles East of the Sunk Light Vessel.

North East Spit: Vessels approaching within the range Dieppe/Amsterdam obtain inward ISP between the "Elbow Buoy" and "East Margate Buoy". Telegraphic address: "Pilots, Folkestone". Telex: 96381. Tel. Folkestone 56766. Advance notice essential as Pilots not always on station. Notice required: preferably 6 hours giving ETA, draft, gross tonnage and destination, confirming 2 hours prior to arrival. Contact Pilots on VHF Channel 16, changing to Channel 9 for working (call sign "North East Spit Pilot Radio"). Light or sound signals as per international code. Pilot boards between the "Elbow Buoy" and the "East Margate Buoy", depending on weather, by fast launch which is stationed in Ramsgate Harbour. Contact Pilots on Channel 16, changing to Channel 9 for working.

Medway: Medway Pilots join ships at Little Nore Sheerness for all Medway ports, i.e. Isle of Grain, Sheerness, Beeness, Oakham Ness. Otterham, Rochester, Queenborough and Ridham. Telegraphic Address: "Pilot Sheerness". Tel. Sheerness 2276. Notice required, minimum 2 hours. Pilots may be contacted through Medway Radio on VHF Channel 14 or Pilot launch keeps watch on Channel 14 when in service. Lights and sound signals as per international code.

VHF/RADAR: Medway Port Operations and Information Service (Medway Ports Authority) is situated at Garrison Point, Sheerness. Tel. Sheerness 3025. Telex: 96435 (call sign "Medway Radio"). Fitted with VHF, Channels 16, 14, 9 and 22. The station has radar service surveillance of Inner Estuary, Sea Reach, Medway Approach Channel and Lower Reaches of River Medway. Patrol launch maintains watch on VHF Channel 11 (call sign "Medway Patrol") and is also fitted with radar.

REGULATIONS: All vessels required to proceed in accordance with instructions of Port Authority. Vessels are requested to advise Medway Ports Authority – Medway Port Operations Service (call sign "Medway Radio") VHF Channels 16, 14, 9 and 22 of ETA, shifting of sailing movements.

GENERAL:

Tidal Information:

Tidal streams in the River Medway vary between about 2.5 knots at Springs and 1.5 knots at Neap Tides, although velocities vary considerably from Reach to Reach, the areas of maximum encountered velocities are: off Garrison Point Sheerness and through Rochester Bridge.

Average Tidal Heights are as follows: (metres)

Sheerness	5.7 MHWS	4.8 MHWN
Chatham	6.0 MHWS	4.9 MHWN
Rochester	6.0 MHWS	4.9 MHWN

High Waters occur approximately:

Margate	45 minutes	before Sheerness
Herne Bay	20 minutes	before Sheerness
Whitstable	10 minutes	before Sheerness
Rochester	9 minutes	after Chatham
Wouldham	28 minutes	after Chatham
New Hythe	33 minutes	after Chatham
Allington Lock	41 minutes	after Chatham

Tide Tables may be obtained at the offices of the Medway Ports Authority.

(B) SHEERNESS: 51.27 N. 00.44 E. (See Plan Book)

Situated on Isle of Sheppey at junctions of Thames and Medway Rivers.

DOCUMENTS: See "London".

PILOTAGE: See "Medway".

ANCHORAGES: For vessels entering River Medway up to 107 m. length, Little Nore Anchorage, Sheerness. Over 107 m. length – as directed by Medway Port Authority (Medway Radio) or Thames Navigation to Great Nore, Sea Reach or Warps.

RESTRICTIONS: Subject to tidal conditions and under keel clearance appropriate size of vessel. Minimum depth of Medway Approach Channel 8.4 m. at MLWS (Chart Datum).

Entry as directed by Medway Port Operations (Medway Radio). Station keeps watch on VHF Channels 16, 14, 9 and 22.

Occasional restriction for entering approach channel when H.M. naval vessels claim priority.

Traffic Warning Lights are exhibited from Garrison Point.

MAX. SIZE: Five deep water terminals for vessels up to 230 m. in length and 11.5 m. in draft.

HEALTH: See "Health – All Ports" before first U.K. port.

RADIO: Portishead. Local Stations: From South – Lands End, Niton, Northforeland. From North, Cullercoats, Humber, Northforeland.

VHF/RADAR: See "Medway".

TUGS: River Medway – For Sheerness, Ridham Dock, Isle of Grain, Bee Ness, Oakham Ness – Tugs usually meet vessels at Garrison Point Sheerness – 6 tugs available with BHP range from 900 to 3,000 BHP. Tug's lines used, no extra charge.

BERTHING: Sheerness, deep water berths and Ferry Terminal – no restriction.

Berths equipped for handling containers, forest products, motor vehicles and wine in bulk and for general cargo of all kinds, including fresh fruit and vegetables.

Storage facilities available for bulk wine and the warehousing of general cargo.

Sheerness Deep Water Berths – No. 1 – suitable for vessels up to 230 m. length and 8.5 m. draft.

No. 2. Suitable for vessels up to 200 m. length and 11.5 m. draft.

No. 3. Suitable for vessels up to 230 m. length and 11.5 m. draft.

No. 4. Suitable for vessels up to 230 m. length and 8.5 m. draft.

Ferry Terminal – Berth 11. Suitable for either bow or stern door vessels of up to 140 m. in length and 6 m. in draft. Present service twice daily Sheerness/Flushing and vice versa, also fortnightly service to Nigeria.

STEVEDORES: All stevedoring at Sheerness is provided by the Port Authority.

CRANES:

Berth No.	*Remarks*
1	4 – 3 & 5 tonne Electric
	1 – 40 tonne Container Gantry
2	5 – 3 & 5 tonne Electric
3	6 – 3 & 5 tonne Electric
4	None (Car Terminal)
5	Ro-Ro berth
11	Ro-Ro/Ferry Terminal
12	10 tonne static (Launches)
12A	Mobiles (Marine Services)
14	Mobiles (Launches)
15	Mobiles (Ship Repairs)
16	Mobiles (Ship Repairs)
30 – 33	Marine Services and Dock Use.

MEDICAL: 24 hours notice to Agents so that Port Medical Officer can be advised. Normal boarding point – Garrison Point Sheerness – smallpox vaccination certificate required for sighting. All usual hospital facilities available within 15 mile range of Sheerness.

DENSITY: Average density 1021/22.

FRESH WATER: Available alongside all berths at Sheerness.

FUEL: All grades available at BP Refinery Isle of Grain – or available by barge or lorry given 48 hours notice.

GANGWAY/DECK WATCHMEN: Gangway watchmen – services recommended as all berths at Sheerness are tidal with average rise and fall of 5 m.

OPENING/CLOSING HATCHES: Within Sheerness Docks rigging gangs are employed by the Authority for this purpose.

REPAIRS: All types of deck and engine repairs can be carried out either in berth, in dry dock or at river buoys.

DRY DOCKS: Sheerness: 2 dry docks available. Largest for vessels up to 86 m., otherwise only small slipways available.

REPATRIATION: Usual facilities available for crew changes – repatriation can be arranged by various air/sea routes.

TELEPHONES: Police: Sheerness 61451; Fire: Sheerness 2382 or dial 999 and ask for Fire Service; Ambulance: Sheerness 4079. At Sheerness coin boxes are available for placing on board.

GENERAL: All shipping movements co-ordinated by Medway Port Control Authority, tel. Sheerness 3025, all arrangements being made after notification of arrival or departure by vessel's Agent.

REGULATIONS: See "Medway".

AUTHORITY: Medway Ports Authority.

(C) ISLE OF GRAIN: 51.26 N. 00.43 E. (See Plan Book)

OPERATOR: B.P. Oil Kent Refinery Limited.

DOCUMENTS:

1 Maritime Declaration of Health.
1 Crew's Effects List.
2 Ships Report by Master.
1 Home Office Form 1.B.6.
1 Stores List.
1 Port Dues Certificate.
Ship's Certificate of Registry.
Load-line Certificate.
Safety Equipment Certificate.
Lloyds Certificate.
De-rat Certificate.
Ship's Register.
Light Bills.
Safety Radio Certificate.
Safety Construction Certificate.

PILOTAGE: See "Medway".

VLCC vessels enter and leave by North Channel. Special pilotage and entry arrangements apply.

ANCHORAGES: *Estuary Passage and anchorages:* Vessels proceeding to Isle of Grain will initially contact the Thames Navigation Service (Gravesend Radio Channels 16-12) and comply with the 'General Directions for Navigation in the Port of London 1975' until entering the Medway Area. Prior contact should be made with the Medway Ports Operations Centre (Medway Radio, Channels 16-14-9-22). Anchorages are allocated according to size and draft of vessel and if outside the Medway area are nominated by the T.N.S.

RESTRICTIONS: Tidal port. 24 hour movements, subject to tidal conditions and under-keel clearance appropriate to size of vessel. The declared depth in the Medway Approach Channel is 8.5 m. (27.9 ft.) at datum.

MAX. SIZE: Largest size of vessel accepted to date, 280,420 d.w.t. part loaded.

HEALTH: Under new procedures which apply from April 1st, 1978 a Health clearance is only required if the vessel is "Suspect". In this case the Port Health Authority should be advised by radio message addressed to "Portelth London" not more than 12 hours and where practicable not less than 4 hours before arrival.

See "Health – All Ports" before first U.K. port.

RADIO:

Notice of 72 hours and over	– Portishead Radio.
Notice of 12-72 hours	– Landsend Radio.
Notice up to 12 hours	– from South, Northforeland Radio. from North, Humber Radio.

RADAR/VHF: See "Medway".

TUGS: 5 tugs available. 2 of them equipped for fire-fighting. Tugs join and leave vessels at Garrison Point, Sheerness. Normally use tug lines, cost included in tug hire.

BERTHING: There are 8 main jetties suitable for ocean-going vessels (Nos. 1 to 8 main) and 3 coaster berths viz.; No. 1 coaster, incorporating No. 1 barge and No. 9 jetty. All the main jetties are of "T" headed design. Jetties 1-7 can accommodate vessels of various sizes up to a max. of 70,000 tons s.d.w. Max. safe drafts for the Medway Approach channel and in the berths for particular periods can be advised on request. No. 8 jetty can accommodate part laden VLCCs up to about 1,130 ft. in length and 179,000 tons arrival displacement. Such vessels are programmed to have not less than 1.22m. (4 ft.) under-keel clearance on arrival at the Medway buoy 40 minutes before H.W. Sheerness. They then berth starboard side to on the first of the ebb tide. The jetty is equipped with the IDASAT visual berthing aid.

Ballast water containing Petroleum may normally be discharged into the Company's oily ballast system by arrangement.

DENSITY: Approx. 1020.

FRESH WATER: Available all jetties by pipe-line.

FUEL: Most grades available on all jetties. Advance notice advisable.

MEDICAL: Advance notice of medical attention and inoculations required is advisable. Hospital facilities available in surrounding areas.

FIRE PRECAUTIONS: *Safety Regulations:* A copy of the BP Oil Kent Refinery Jetty Safety Regulations is put on board each vessel on arrival. The booklet additionally contains various tear-out check lists, forms for confirmation of bunker requirements and requests for immobilisation and permitted repairs. These must be completed by ship and shore representatives before operations commence.

GANGWAY/DECK WATCHMEN: *Gangways:* A tower-mounted gangway suitable for VLCCs is provided on No. 8 jetty. Vessels provide their own gangway at other jetties and are responsible for maintaining it as a safe means of access.

REPAIRS: Local marine repair company can undertake repairs of general nature. No drilling or hot-work permitted alongside jetties.

REPATRIATION: All facilities for repatriation by land, sea and air, through London and Dover. Attendance of British Ministry and Foreign Consulate officials arranged through Agent.

POLICE/AMBULANCE/FIRE: The Refinery Fire Service (which also operates an ambulance) can be summoned by dialling 222 on the Refinery telephone system. This procedure should be followed in any emergency – e.g., a major accident or hose failure, etc.

Refinery Security can be contacted by dialling 221. Any request for attendance by the County Police should be made through Refinery Security Dept.

TELEPHONES: There are public telephone kiosks on the foreshore road.

GENERAL: Agents have difficulty in providing most services at week-ends, therefore, requests for Bond, cash, consular officials, etc., should be radioed as soon as possible.

CUSTOMS ALLOWANCES: At the discretion of the local Customs Officer. Normal allowances are 0.25 lb. tobacco or equivalent and 1 bottle of spirits per man. Additionally 1.5 litres of wine per man per day. Separate arrangements apply when crew members are leaving a ship. Vessels in port more than 3 or 4 days may receive an additional allowance.

TIME: British Standard Time is GMT plus 1 hour. GMT in Winter months.

(D) ROCHESTER: 51.23 N. 00.30 E. (including Chatham, Strood, Upnor, Gillingham, Snodland, Halling & New Hythe (See Plan Book)

DOCUMENTS: See "London".

PILOTAGE: See "Medway".

ANCHORAGES: See "Sheerness".

RESTRICTIONS: No entry restrictions only as to state of tide and draft and as directed by Medway Radio (Medway Port Operations and Information Service, Garrison Point). Station keeps watch on Channel 16, 14, 22 and 9. Channel 14 is allocated for port operations generally. For vessels exceeding 350 ft. in length, daylight navigation.

MAX. SIZE: For Rochester ship berths maximum length 400 ft. and 25 ft. draft. River berths available 160/500 ft. in length, with depths of water HWST 14/25 ft. and HWNT 9/20 ft.

HEALTH: Pratique obtained on arrival at Sheerness where Port Medical Officer is available if required.

Also see "Health – All Ports" before first UK port.

RADIO: From South: Lands End, Niton, Northforeland. From North: Cullercoats, Humber, Northforeland.

TUGS: J. P. Knight (Rochester) Ltd., 348 High Street, Rochester (Tel. Medway STD 0634 – 42408 and Sheerness STD 07956 – 2821), cover the whole of the Medway Ports Area.

The following companies operate within the Medway Ports Area on a smaller scale with towing and recovery services:

Medway Towing & Light Recovery – Medway STD 0634 – 54300
N.E. Murray (Marine Contractors) – Sheerness STD 07956 – 3701
P. E. Woodger (Craft Hire) Ltd. – Sittingbourne 23874
Mr. J. Oliver – Medway STD 0634 – 406525

BERTHING:

Rochester: There are 10 dredged ship berths operated by the Medway Ports Authority, 2 standby or lay-by berths and mooring buoy facilities to accommodate 118 lighters and 14 lash barges situated between Chatham Reach and Rochester Bridge.

Size restrictions vary from 46 m. to 140 m., the latest minimum depths can be obtained from the Medway Ports Operations and Information Service situated at Sheerness (Garrison Point).

The facilities or riverside berths are operated by commercial interests:

Medway Wharfinger Ltd. at Phoenix Wharf	Medway 79881
Transit Freights Ltd. at Crown Wharf	Medway 75686
Honigs (Rochester) Ltd. at Limehouse Wharf	Medway 46261
Wm. Cory & Sons Ltd. at Cory's Wharf	Medway 41022
Anglosped Ltd. at Stanley's Wharf	Medway 409365
Lynch and Sons Ltd. at Lynch's Wharves	Medway 77831
Crescent Shipping Ltd. at Barnetts Wharf	Medway 79541/8
John Howards Ltd. at Crown & Quarry Wharf and Howards Wharf	Medway 402040 (20 lines)
Flamecap Ltd. at Acorn and Blue Boar Wharf	Medway 44358/9

Details of alongside berths handling equipment, latest depths and relevant information can be obtained from the appropriate wharf concerned.

Current depths can be ascertained from Medway Port Operations Service.

Patmans Wharf: (Lat. 51° 25′ North; Long. 0° 32′ East)

Situated in Upnor Reach, owned and operated by the Medway Brick and Stone Works Ltd. (Telephone: STD 0634 – 78082). Length of wharf 61 m. with a depth of 4.7 m. at MHWS. 3 – 3 to 4 tonnes travelling cranes, mobiles and forklift trucks available.

Pier Wharf: (Lat. 51° 24′ North; Long. 0° 33′ East)

Situated at the Western Arm of Gillingham Dock and operated under a contortium of companies. Length of wharf 183 m. with varying depths from 3 m. to 5 m. at MHWS. Mobile crane of 4 tonnes and forklift of 4,000 lbs. Storage warehouses and storage capacity available.

Ship repair and boat builder – Medway Marine Structures – STD 0634 – 576600.

Tylers Wharf: (Lat. 51° 24.6′ North; Long. 0° 34′ East)

Situated at West Hoo Creek owned and operated by the Tyler Boat Company Ltd. (Telephone: Tonbridge 365111–9). Length of wharf 73 m. with a depth of 3 m. at MHWS. Large sheerlegs of 30 tons and mobiles available. Boat builders and outfitters.

Mooring Facilities: Buoys are provided at points within the River Medway and Swale. Arrangements to use these buoys and current charges can be made through the Medway Ports Authority.

Kethole Reach

Buoys	
20 – 21	Fore and Aft mooring – 430 ft.
21 – 22	Fore and Aft mooring – 690 ft.
3rd	
22 – 23	Fore and Aft mooring – 420 ft. Displacement 8,000 tons
4th	
23	Swinging Buoy – Max. LOA 200 ft. Displacement 2,500 tons.

Saltpan Reach

Buoy No.	*Class*	*Maximum Displacement*	*Remarks*
*1	3rd	8,000 tons	
2	Super 1st	70,000 tons	
*3	2nd	16,000 tons	
4	Super 1st	70,000 tons	
5	4th	3,500 tons	LASH
6	4th	3,500 tons	LASH
7	4th	3.500 tons	LASH
8	4th	3,500 tons	LASH
9	4th	3,500 tons	LASH
10	4th	3,500 tons	LASH

*By permission of the Ministry of Defence (Navy)

MEDICAL: Port Medical Officer available if necessary on arrival at Sheerness with 24 hours notice to Agents. Doctor and hospital facilities available at Rochester.

DENSITY: 1020 unless excessive land water coming down river.

FRESH WATER: Quantities up to 200 tons available for delivery by water barge.

FUEL: Oil bunkers may be obtained at the main installation at the Isle of Grain Oil Refinery, or by barge or by road tanker. The last 2 methods require minimum 48 hours notice, similarly with supplying lubricating oil which is not available at the Isle of Grain.

OPENING/CLOSING HATCHES: To be carried out by crew.

CARGO GEAR: Discharge by ship's gear at ship berth and by mobile cranes up to 10 tons at all river berths.

CONSULS:

Vice-Consul Netherlands, Tel. Medway 43256.
Consul Sweden, Tel. Medway 44632.
Vice-Consul Finland, Tel Medway 44632.

REPAIRS: The Medway Dry Dock Co. Ltd. (Tel: Sheerness STD 07956 – 2241/2461) provide 2 Dry Docks of 87.84 m. and 65.58 m. respectively. A smaller slipway is available and alongside berths also.

The Medway Slipway Yard at Rochester High Street of Doust and Company Limited (Tel: Medway STD 0634 – 43087) provide ship repair facilities and operate 2 slipways. The larger can accommodate up to 600 tonnes and 55 m. in length. Afloat repair facilities and riverside berths also available.

Acorn Shipyard (ex New Medway) Gas House Road, Rochester, Kent ME1 1PJ (Tel: Medway STD 0634 – 41355/6/7), provide ship repair facilities at the Isle of Grain; Sheerness and River Medway, and operate 1 patent slipway of 85.0 m. working length and 1 grid situated at Rochester.

DRY DOCKS: All repair facilities available on river berths for vessels up to 200 ft. in length; on a grid for up to 250 ft., and a slipway for up to 140 ft.

AIRPORT: London Airport (Heathrow), Southend Airport.

POLICE/AMBULANCE/FIRE: Dial 999 and state service required and where vessel berthed, also contact Medway Radio in cases of emergency.

SERVICES: Compass adjustors available.

REGULATIONS: See "Medway".

DEVELOPMENTS: Continued expansion and reclamation at Sheerness: Blue Boar Wharf (Rochester) under development. Development of Frindsbury Marshes (Rochester).

AUTHORITY: Medway Ports Authority.

(E) OTHER FACILITIES:

(1) BEE NESS JETTY: 51° 25′ 18″ N. 00° 39′ 00″ E.

Owned and operated by Berry Wiggins and Company Limited situated in Kethole Reach, a distance of 4.1 nautical miles from Sheerness (Garrison Point).

The jetty is of timber construction and is 2,496 m. long (1.35 nautical miles). The jetty runs parallel to East Hoo Creek where an inner spur is situated 1,097 m. from the jetty head.

The jetty head is 14.1 m. long with dolphins upstream and downstream, also mooring buoys upstream and downstream of the dolphins for mooring. The maximum size of vessels permitted is 11,000 d.w.t. with a size restriction of 168 m.

The depth at MLWS is 7.3 m.
at MHWS is 13.0 m.

The inner spur has a size restriction for vessels of 61.0 m. and;
The depth at MLWS is 3.9 m.
at MHWS is 9.6 m.

The company has a storage capacity of 80,000 cu.m. and the jetty is unsuitable for vehicular traffic.

Address: Berry Wiggins (Kingsnorth) Ltd.,
Hoo, Rochester,
Kent ME3 9ND

Telephone: STD 0634-250722 (Medway) Telex: 965236

May 1978

Company renamed K.C.A. International (Kingsnorth). Address and telephone as before.

(2) BLOORS WHARF – RAINHAM CREEK 51° 22′ 48″ N. 00° 36′ 42″ E.

Situated at the head of Rainham Creek a distance of 10.3 nautical miles from Rochester. Main wharf 183 m. long with 3.1 m. at MHWS. The Western arm is 61 m. long with a depth of 2.1 m. at MHWS.

The Wharf is owned and operated by Medway Secondary Metals Ltd. (A British Anzani Company). Telephone: STD 0634-34411. Mobile cranes, forklifts and crushing equipment available. Large storage capacity and warehouses also available. Shipbreaking and re-cycling of metals.

(3) FAVERSHAM: 51° 19′ N. 00° 54′ E.

DOCUMENTS: See "London".

PILOTAGE: Not compulsory. Advisable to engage local person by arrangement with Agent or contact Medway Port Operations and Information Service.

ANCHORAGE: The Swale (East) 1 mile (approx.) upstream of the Sand End buoy.

RESTRICTIONS: No night restrictions. Tidal creek – vessels enter from 1.5 hours before High Water according to draft.

MAX. SIZE: 140 ft. LOA, 25 ft. beam, 9 ft. draft, on Spring tides only.

RADIO: North Foreland.

VHF/RADAR: See "Medway".

TUGS: None available.

BRIDGES: Maximum size of vessels proceeding to basin above Faversham Swing Bridge – 140 ft. length, 23 ft. beam. Draft – the minimum clearance for vessels up to 110 ft. in length is 1.5 ft. over the sill, and for longer vessels 2 ft. over the sill.

MEDICAL: Notify Agent of any medical treatment required.

FRESH WATER: Available on some berths.
FUEL: No local installation. Bunkers may be obtained by road tanker – contact Agent.
REPAIRS: Minor repairs can be carried out locally. For nearest grid, slipway and dry dock facilities see "Rochester" and "Sheerness".

(4) KINGSNORTH: 51° 25′ N. 00° 36′ E.
DOCUMENTS: See "London".
PILOTAGE: See "Medway."
ANCHORAGES: Vessels proceeding to Kingsnorth must contact Medway Ports Operations Centre (VHF Channels 16 and 14) when a designated anchorage will be allocated appropriate to the size of the vessel.
RESTRICTIONS: Tidal port. 24 hour movements, subject to tidal conditions and under keel clearance appropriate to size of vessel. Minimum depth of approach channel 28 ft. LW at present.
MAX. SIZE: Max. lengths: 750 ft. No breadth restriction. Draft: 38 ft. alongside jetty.
HEALTH: See "Health – All Ports" before first U.K. port.
RADIO: Notice of 72 hours and over, Portishead Radio. Notice of 12-72 hours. Landsend Radio. Notice of up to 12 hours, from South, Northforeland Radio, and from North, Humber Radio.
RADAR/VHF: See "Medway".
TUGS: 6 tugs available. 3 of them equipped for fire fighting. Tugs join and leave vessels at Garrison Point, Sheerness. Normally use tug lines, cost included in tug hire.
BERTHING: *Kingsnorth Jetty:*
51° 24′ 36″ Lat. North
0° 36′ 18″ Long. East

The jetty is owned and operated by C.E.G.B. (Kingsnorth) and is situated at the Western end of Long Reach a distance of 6.3 nautical miles from Sheerness and 5.85 nautical miles from Rochester.

The jetty is of concrete construction and is 580 m. long and "L" shaped with a 306.3 m. face, there is a single upstream connected dolphin making an overall face of 330.7 m.

The size of vessels using the jetty are governed by draft.
Depth at MLWS is 7.3 m.
MHWS is 13.2 m.

There is an inner spur situated on the approach arm 396 m. from the jetty face. It is primarily intended for stern Ro-Ro craft, and has 2 starboard berthing dolphins situated at 30.5 m. and 61.0 m. respectively.
Depth at MLWS is 0.6 m. above PLWD
MHWS is 5.3 m.

The jetty is used for the import of coal for Kingsnorth Power Station.

Address: Kingsnorth Power Station
(South Eastern Region)
Hoo, Rochester,
Kent ME3 9NQ
Telephone: STD 0634 – 250088 Telex 965015

MEDICAL: Advance notice of medical attention and inoculations required is advisable. Hospital facilities available in surrounding areas.
TANKERS: Advisable radio Agents connection sizes required. No slop tank available. 1 large tanker berth only.
DENSITY: Approx. 1018.
FRESH WATER: Available by pipe-line on jetty.
FUEL: Bunkers not usually available on jetty, but may be delivered by barge. Advance notice essential.
FIRE PRECAUTIONS: No immobilisation or repairs allowed without prior authorisation. No hot-work allowed alongside jetty.
GANGWAY/DECK WATCHMEN: Services of shore watchmen not necessary. Shore gangway may be used.
REPAIRS: Local marine repair company can undertake repairs of general nature. No drilling or hot-work permitted alongside jetty.
REPATRIATION: All facilities for repatriation by land, sea and air, through London and Dover. Attendance of British Ministry and Foreign Consulate officials arranged through Agent.
POLICE/AMBULANCE/FIRE: Dial 999 from public call box. Medway Ports Operations Centre can be alerted on Channel 16 and 14 to call these services.
TELEPHONES: No facilities exist for placing telephones onboard.
GENERAL: Agents have difficulty in providing most services at week-ends, therefore, requests for bond, cash, consular officials, etc., should be radioed as soon as possible.

(5) OAKHAM NESS JETTY 51° 24′ 55″ N. 00° 38′ 45″ E.

The jetty is jointly owned and operated by C.E.G.B. and K.C.A. International Ltd. and is situated in Kethole Reach a distance of 4.5 nautical miles from Sheerness (Garrison Point). The jetty is of concrete construction and is 1,960 m. long. The jetty head is 27.5 m. long with upstream and downstream attached dolphins making a 85.0 m. face. There are 2 further berthing dolphins unattached, both upstream and downstream. The max. size of vessel permitted on the jetty is restricted to 55,000 d.w.t. with a max. length of 229 m. The depth at MLWS is 11.0 m.
at MHWS is 16.7 m.

C.E.G.B. have a separate storage capacity of 300,000 tons for crude oil primarily for Kingsnorth Power Station.

(6) OTTERHAM QUAY – RAINHAM 51° 22′ 30″ N. 00° 37′ 42″ E.

Situated at the head of Otterham Creek a distance of 2.75 nautical miles from the junction of Long Reach and Kethole Reach and 10.25 nautical miles from Rochester.

There is 192 m. of quay space with a max. length restriction imposed on loaded vessels of 73 m. There is 3.3 m. at HWNT and 4.6 m. at HWST.

Dockside and mobile cranes up to 9 tonnes are available, fleet of fork lift trucks with 3 tonne capacity.

There is 8,984 sq.m. of wharf stacking area together with 15,217 sq.m. of warehousing available. Cold storage facilities of 1,003 sq.m. are also available.

The Quay is owned and operated by Crescent Shipping (sole proprietors London and Rochester Trading Co.). Telephone STD 0634 – 35121 Telex: 96312.

(7) QUEENBOROUGH 51° 26′ N., 00° 44′ E.

Area of harbour extends from Queenborough Spit to Long Point and is known as the West Swale. Queenborough Creek is landlocked and small commercial interests operate within the creek which is buoyed, all berths dry out but are safe berths.
MHWS 5.8 m. Weather – prev. S.W.

The ex-Coal Wharf known as the Washer Wharf, situated at Loden Hope is operated by Shipbreaking (Queenboro') Ltd. (Tel: Sheerness 3065) and is primarily used for loading scrap metals.

(8) RIDHAM DOCK 51° 23′ N., 00° 46′ E.

Situated 900 m. (0.5 nautical mile) S.E. of Kingsferry Bridge in the Swale. Restrictions on vessels governed by London Pilotage Committee in the light of water available in the Swale, Kingsferry Bridge and restricted bends in the navigational channel. Max. LOA 102 m. Beam 16.8 m. and draft 6.7 m.

Ridham dock is owned and operated by Independent Sea Terminals (Tel: STD 0795 – 70881). The terminal has 4 berths, 2 of 244 m. and 2 of 213 m. approximately. These are serviced by 8 electric cranes 2 – 6 tonnes and 6 – 5 tonnes. A large 25 tonne lift crane is planned.

Vessels dock only on or near HW and take the ground at LW, the bottom being soft mud.

The terminal covers approximately 26.7 hectares and 13,000 sq.m. of warehousing are available.

MILFORD HAVEN: 51.42 N. 05.10 W. (See Plan Book)

DOCUMENTS:
Port Health Form.
Immigration Form.
Customs Forms (Crew Declaration, List of Stores.)
3 Crew Lists.

PILOTAGE: Pilots normally board incoming ships from a green-hulled pilot vessel, in a position S.W. of Mid-Channel Rock Light-tower, as close thereto, as weather, size of ship and circumstances permit. When the Western Channel is being used by very large ships other ships may be requested by the signal station, or by the pilot vessel to use the Eastern channel, if draft, and length of ship permit, in which case the Pilot will board close to Sheep Buoy. Deep-draft ships should not approach too close whilst awaiting the pilot vessel. They should remain at least two miles S.W. of Mid-Channel Rock Light-tower. It is important, when manoeuvring at slow speeds to embark a Pilot to make proper allowance for the set of the tidal stream, which sets across the entrance.

Accurate times of arrival are requested so that the pilot vessel may be on station at the correct time. ETAs should be given at least 12 hours before arrival and amendments should be made 2 hours before the latest ETA.

ETAs and subsequent amendments should be passed by radio telegram or radio telephone through any United Kingdom Coast Station (preferably Ilfracombe Radio) to Milford Haven Signal Station (Milford Haven 2343) or to the local Agent of the ship. Alternatively when within 20 to 30 miles of St. Ann's Head ETAs may be passed direct to Milford Haven Conservancy Board signal station calling on VHF Channel 16 then transferring to Channel 12 (the Port working frequency). In addition ships may call the pilot vessel on MF radio calling on 2,182 kHz and transfer to the working frequencies 2,241, 2,246 or 2,301 kHz.

RADAR: Harbour surveillance radar in operation.
VHF: It is important to maintain continuous radio telephone contact with Signal Station when within one hour's steaming of St. Ann's Head, and at all times when in Haven and not safely moored to and alongside berth, including times spent at anchor or at buoys.

All vessels equipped with F/M, VHF, R/T should adopt following procedures:

Entering the Harbour: Contact Signal Station on Channel 16 (156.8 mc/s) when within one hour's steaming of St. Ann's Head. After making contact ship will be requested to maintain watch on Channel 12 (156.6 mc/s) until vessel safely moored alongside or at anchor.

Going to anchor or to a buoy mooring: report to Signal Station when secured and then maintain a continuous listening watch on Channel 16.

Berthing alongside: report to Signal Station when safely moored and may then shut down.

Leaving the Haven: Maintain continuous listening watch on Channel 12 (156.6 mc/s) until Pilot has disembarked, when Signal Station should be informed and vessel should maintain a continuous watch on Channel 16 (156.8 mc/s) until one hour after passing St. Ann's Head.

Navigating within the Haven: Maintaining a continuous watch on Channel 12. When radio telephone is used between vessel and tugs during berthing operation Channel 6 or 8 will be used and Signal Station will be informed before vessel comes off Channel 12.

Signal Station will answer calls on Channel 16 for any ship in the port which has been instructed to move off international calling frequency.

ANCHORAGES: Anchorage normally available for vessels up to 40 ft. draft in Dale Roads. Anchorage for smaller vessels normally available in Dale Shelf. Signal Station will advise mariners on the availability of these anchorages.

RESTRICTIONS: The "West Channel" with min. depth of 55 ft. at the entrance and 54 ft. inside is the channel used by the largest tankers. The "East Channel" with min. depth of 32 ft. is available to all vessels of suitable size and vessels able to do so are requested to use it when the largest tankers are entering or leaving in the "West Channel".

MAX. SIZE: Vessels of 65 ft. draft can be handled on virtually all high waters, but draft restriction always dependent on tide, e.g. 63 ft. at worst HW neaps, or up to 67 ft. in favourable conditions. Contact Milford Haven Signal Station on VHF Channel 12 for latest information.

HEALTH: All vessels from endemic areas are boarded by Port Health Officials on arrival. Any suspected disease or fever on board radio Port Health, Milford Haven not more than 18 hours before arrival and not less than 4 hours before arrival.

Also See "Health – All Ports" before first U.K. port.

RADIO: Lands End Radio, Ilfracombe Radio.

TUGS: Tugs normally join vessels to Westward of Esso Jetty, but Master will be advised by Pilot. Tug's lines used, cost of lines inclusive of towage charge.

BERTHING: VLCCs enter at HW and berth heading East. Vessel will be required to swing after unloading and prior to departure.

The Milford Docks includes a wet dock with a water area of 23 acres over 30 ft. deep, 4,000 ft. of quay frontage including a 600 ft. cargo jetty, and berths in the tidal harbour with a depth of 12 ft. of water at all states of the tide. Preparations are being made to deepen the tidal berths.

STEVEDORES: Ordered prior to arrival with at least 3 days notice.

MEDICAL: Advance notice to Agent not necessary. Local hospital facilities available. Smallpox and yellow fever certificates required.

TANKER TERMINALS:

Esso

No. 1 Berth: depth 57 ft. five 12-in. cargo lines
No. 2 Berth: depth 65 ft. four 16-in. and one 10-in. cargo lines
No. 5 Berth: depth 20 ft. for small coastal vessels
Esso swinging ground dredged to 37 ft.

New Esso Berths

No. 3 Berth: Max. size 30,000 d.w.t. depth 38 ft. cargo lines; five 10-in. (one Black oil, four clean oil.) Three 12-in. (Black oil).
No. 4 Berth: Max. size 20,000 d.w.t. depth 37 ft.; cargo lines are the same as No. 3 berth.

B.P. Angle Bay

No. 1 Berth: depth 54 ft. five 10-in. cargo lines; one 8-in. fuel line
No. 2 Berth: depth 54 ft. five 10-in. cargo lines; one 8-in. fuel line
No. 3 Berth: depth 66 ft. five 16-in. cargo lines; one 10-in. fuel line
B.P. swinging ground dredged to 32 ft.

Texaco, Pembroke

No. 1 Berth: depth 68 ft. 16-in. crude lines
No. 2 Berth: depth 52 ft. 8-in. crude lines
No. 3 Berth: depth 36 ft. 8-in. product lines
No. 4 Berth: depth 18 ft. 6-in. product lines
No. 5 Berth: depth 21 ft. 6-in. product lines
Texaco swinging ground dredged to 32 ft.

Gulf Oil

No. 1 Berth: depth 42 ft. three 10-in. and two 12-in. cargo lines
No. 2 Berth: depth 55 ft. six 12-in. cargo lines
No. 3 Berth: depth 34 ft. six 8-in. and one 4-in. cargo lines
Gulf swinging ground dredged to 42 ft.

Amoco

No. 1 Berth: depth 68 ft. four 16-in. crude lines; two 12-in. and three 8-in. product lines.
No. 2 Berth: depth 38 ft. one 12-in., two 10-in., three 8-in. and one 6-in. product lines.
No. 3 Berth: depth 22 ft. two 8-in. and three 6-in. product lines.
Amoco swinging ground dredged to 32 ft.

DENSITY: 1025.

FUEL: All terminals, Amoco, Gulf, Texaco, B.P. and Esso supply all grades of bunkers.

FIRE PRECAUTIONS: Fire wires to be rigged fore and aft.

GANGWAY/DECK WATCHMEN: Supplied if necessary – very rarely.

CERTIFICATES:

Register.
Load Line.
Safety Radio.
Safety Equipment.
Light Dues, etc.

CUSTOMS ALLOWANCE: Tobacco, 0.5. oz. per man per day. Wine/Spirit, 0.25 pint per man per day.

IDENTIFICATION CARDS: Not necessary.

CONSULS:

Norway	tel.	Milford Haven 2313
Belgium	,,	Milford Haven 2313
Spain	,,	Pembroke Dock 2603
Italy	,,	Milford Haven 4371

REPAIRS: All types of deck and engine voyage repairs carried out.

DRY DOCKS: One dry dock at Milford, 600 ft. × 63 ft. × 18 ft.

REPATRIATION: Crew changes frequently carried out and repatriation arranged.

AIRPORT: Nearest airport at Rhoose (near Cardiff) distance approximately 100 miles. Flights to London, etc., for onward connections.

TIME: Local Time is BST (GMT plus 1 hour). GMT during Winter months.

HOLIDAYS: Standard U.K. Holidays. Cargo work can be arranged on these days.

POLICE/AMBULANCE/FIRE: Police Milford Haven 2351, Pembroke Dock 2121; Ambulance Haverfordwest 3347; Fire Haverfordwest 2131.

TELEPHONES: No telephones on board. Public call boxes exist on all jetties.

GENERAL: Anti-oil Pollution plan in force with facilities for dealing with any oil pollution.

SERVICES: Compass adjusting. D.F. calibration. A "Scamp" underwater hull cleaning service is available.

N.B. Crew and stores directed by rail to vessels at Angle Bay (B.P.) or Pembroke (Texaco) should be directed to Pembroke Station. For vessels at Esso, Amoco and Gulf Terminals, stores should be directed to Milford Haven.

SHORE LEAVE: Shore leave allowed.

AUTHORITY: Milford Haven Conservancy Board.

AGENT: G. S. Kelway Ltd., Murray Crescent House, The Rath, Milford Haven SA73 3JR, Dyfed. Tel: Milford Haven 2313/4. After hours: Milford Haven (06462) 5587, 2615, 2364. Telex: 48213. Cables: "Kelway Milford Haven."

MONTROSE: 56.42 N. 02.17 W. (See Plan Book)

PORT LIMITS: The port is bounded by a line drawn in a NW'ly direction from Scurdie Ness lighthouse to the Annat Bank and thence by both banks of the river to the road bridge which completes the inner boundary.

DOCUMENTS:

1 Crew List,
1 Passenger List,
1 Store List,
1 Personal Effects List for baggage coming ashore,
1 Manifest or Bill of Lading.
Ships Register, Load Line Certificate, Radio Certificate and LSA and Safety Certificates to be sighted.

PILOTAGE: Pilotage is compulsory. Pilots are available throughout the 24 hours. International Code Flag "G" to be exhibited.

Vessels should approach the port to a position with Scurdie Ness lighthouse bearing 250° distance 0.5 mile where Pilot will normally board.

Pilot cutter *"Celurca"* has a dark blue hull with white upper works and "Pilots" painted in black on each side of the wheelhouse. The normal red and white pilot flag is flown during daylight and regulation lights exhibited at night. VHF Channel 16 for calling with a working frequency on Channel 12.

In bad weather it may be necessary for a ship to proceed inwards at the radioed directions of a Pilot to a position on the outer leading marks and inside the lighthouse where the Pilot may board safely. This will only apply during periods of strong Easterly gales and very heavy seas and may be applicable for only a few times in a year. Similarly the port may be closed under severe weather conditions on average 2.5 days per year.

ETA messages: Masters should cable Agent with 24 hours notice of arrival giving overall length and deepest draft and also call Montrose Harbour Radio within 2 hours of arrival at the pilot station.

ANCHORAGE: In position mentioned above with Scurdie Ness bearing 250° distance 0.5 mile, in about 13 m.

MAX. SIZE: Since the harbour was reconstructed and deepened ships of 385 ft. LOA and 5,500 tons have been handled on a draft of 18 ft. Proportionately smaller ships are handled in the wet dock, berthing about 2 hours before HW and unberthing on HW.

HEALTH: "Q" flag to be flown when coming from a foreign country until cleared inwards. In event of disease or fever warn Agents by radio. Strict attention paid to quarantine regulations regarding dogs which are not allowed ashore.

Also see "Health – all ports" before first UK port.

RADIO: Messages to Agents may be sent through Stonehaven Radio. Harbour service is on Channel 12. Call Montrose Harbour Radio on Channel 16.

RADAR/VHF: No port radar service. Harbour service and pilot vessel work on VHF Channels 16 and 12.

TUGS: Pilot vessel is equipped with towing hook and pusher bow to assist in berthing and unberthing if necessary. Vessels lines used. Small charge made for such work.

BERTHING: Dockside Quays No. 1 and 2, 127 m., No. 3, 88 m., No. 4 and 5, 137 m., No. 6, 63 m.

Wet dock berths retained at approximately 14 ft. of water.

North River Side Quays No. 7, 50 m., No. 8, 40 m., (Unused at present), No. 9, 75 m., No. 10/11, 140 m.

Depths vary from 10 ft. at No. 7 to 16 ft. at Nos. 10 and 11 at chart datum.

South River Side Quays. Berth Nos. 12, 13, 14, 15, 16, 17 and 18. These are extensively used by oil related vessels and this area of the harbour has been leased to Sea Oil Services Ltd.

Total wharf length available is 1,600 ft. with depth alongside 20 ft. at MLWS.

STEVEDORES: Provided by Agents J. M. Piggins & Co. Ltd., phone Montrose 2827 Telex 76251.

CARGO HANDLING FACILITIES: The stevedores are well equipped with mobile cranes, fork lifts, etc., and only rarely is ship's gear used unless it is of rapid, modern type. Grab discharge is used for bulk cargoes and conveyor belt systems for loading same.

Rates of loading or discharge:— Bagged cargoes 250 tons per gang per day; Bulk 400 tons; Bulk grain loading 700 tons; Unitised pulp 500 tons; Paper 500 ton; Timber 500 tons all per gang per day.

There is always available a large motor transport fleet at the port and the Agents also have their own road haulage company.

TANKERS: There is no oil berth in the harbour except the facilities offered by Sea Oil Services for the receipt into their 3,000 ton storage depot of gas oil.

MEDICAL: Small hospital in Montrose. Several major units within easy reach by road.

DENSITY: At high water average 1024 but can be as low as 1005 at low water during heavy river outflow.

FRESH WATER: Supplied from Quayside hydrants at all berths.

FUEL: Obtainable from road tanker, gas oil and H.S.D. only from more prominent oil companies.

FIRE PRECAUTIONS: Normal rules to be observed.

CONSULS: None in Montrose.

GANGWAY/DECK WATCHMEN: Can be arranged. Owing to range of tide on riverside berths mooring watch strongly recommended.

OPENING/CLOSING HATCHES: Normally done by ship's crew.

CERTIFICATES: On arrival ship's register may be asked for.

CUSTOMS ALLOWANCE: As arranged between Customs Officer and Master.

CARGO GEAR: The port is equipped with mobile cranes which can be used at any berth. These are of various capacities and the maximum lift is 25 tons for which prior notice is required.

IDENTIFICATION CARDS: Not required.

REPAIRS: Minor deck and engine repairs can be carried out.

DRY DOCKS: None.

SURVEYORS: Classification Society Surveyors can be called in at reasonable notice.

REPATRIATION: Facilities available with excellent railway connections. Air connections from Aberdeen.

AIRPORT: Aberdeen 36 miles. Montrose has facilities for light aircraft and helicopter landing.

TIME: GMT with 1 hour advance for British Summer Time, approximately March to October.

HOLIDAYS: *Port Holidays:* Christmas Day; Boxing Day; 1st and 2nd January; One day Spring, Mid-Summer and Autumn Trades Holidays.

POLICE/AMBULANCE/FIRE: Report to Dock Office immediately. Dial 999 and ask for whichever emergency service required.

TELEPHONES: Not possible to place phones aboard. Kiosk on Wharf near Agents office. Comprehensive connections to Continent and Telex services from Agents office.

SERVICES: Laundry, Ship Chandlers and Lloyds Agent immediate.

Compass Adjuster, Radio/Radar Mechanics can be called in from Aberdeen at short notice.

SHORE LEAVE: No restrictions on crew members after inward clearance.

AUTHORITY: Harbour Master, and General Manager, Montrose Harbour Board.

AGENT: J. M. Piggins & Co. Ltd., Meridian Street, Montrose. Tel. Montrose 2827. Telex: Montrose 76251. Cables: Shipping Montrose, Night Service telephone Montrose 3211 and Montrose 3472.

NEWHAVEN: 50.47 N. 00.04 E. (See Plan Book)

PORT LIMITS: A line drawn from a position 300 ft. South of breakwater in a 075° direction to Seaford Bay.

DOCUMENTS: See "London".

PILOTAGE: Trinity House Pilots, Newhaven District: VHF "Newhaven Radio" Channels 16 and 12. Pilot boats are small fast launches painted red and white. Light and sound signals for a Pilot is "G". Notice of ETA 12 hours before arrival, if possible. Anchorage for a vessel awaiting a Pilot is 0.5 to 1 mile S.W. of the breakwater, depending on weather conditions. Pilots normally board S. to S.W. of the breakwater, but in severe gale conditions they keep station 100 m. from breakwater end, and guide vessels in with VHF or lamp. Notice should also be given to the red and green signal lights at the West Pier end lighthouse, and on no account should vessels pass breakwater end if signal is at red. In normal weather, pilot ladder should be on lee side about 1 m. above water. In Southerly gales Pilots prefer a ladder on each side, if available.

RESTRICTIONS: 3 fathoms through entrance to port LWOST. Inner harbour then dredged depth of 13 ft. in accordance with chart datum 11.40 ft. above OD Newlyn.

MAX. SIZE: 450 ft. length, 25 ft. draft taking bottom on soft mud at low water. Vessels greater than 350 ft. LOA length must either be towed into or out of port. Vessels for North Quay must not exceed 250 ft. length, draft 17 ft.

HEALTH: See "Health-all ports" before first UK port.

RADIO: Radio Station Newhaven Radio, call sign Newhaven Radio.

RADAR/VHF: No radar service. Ship's may contact West Pier control point on Channel 16, working on Channel 12.

TUGS: Available upon request.

BERTHING: Vessels may be berthed at any time, with prior notice given.

BRIDGES: Vessels requiring to berth at North Quay must arrive within 2 hours either side of high water in order to pass through swing bridge which governs access to this quay.

STEVEDORES: ETA should be given as far in advance as possible and not less than 24 hours before ETA.

DENSITY: Salt water.

FRESH WATER: Available on request. Supplied by shore hosepipe.

FUEL: Available by previous arrangement.

FIRE PRECAUTIONS: Usual no-smoking precautions on quayside in port area.

GANGWAY/DECK WATCHMEN: Not provided by Port Authorities but recommended at discretion of Ship's Master.

CONSULS: Norwegian Vice-Consul and French Consular Agency.

REPAIRS: Repairs of a temporary nature only may be carried out by B.R. workshops, Ship & Industrial Repairs Ltd., Unit A3, Beach Road, Newhaven and C. R. Irving Ltd., Chapel Street, Newhaven.

AIRPORT: Nearest airport Gatwick, distance 30 miles. Served by regular airlines.

POLICE/AMBULANCE/FIRE: Police: Civil, Newhaven 5219; Port, Newhaven 4131 (extension: 229). Ambulance: 0830–1700 hours, Lewes 5400; 1700–0830 hours, Lewes 2819; Fire: 999.

SHORE LEAVE: Allowed.

AUTHORITY: Shipping and Port Manager, British Railway Board.

NEWPORT: 51.35 N. 02.59 W. (See Plan Book)

DOCUMENTS:

- Crew List.
- List of stores for individual crew members.
- Cargo Manifest.
- Cargo Plan.
- Ship's Register.
- Loading Certificate.
- Safety Equipment Certificate.
- Safety Construction Certificate.
- United Kingdom Light Bills.

PILOTAGE: Telegraphic address – "Newpilots Barry". Advance notice required – 24 hours. VHF Channel – Channel 16 for contact, thence Channel 6 for conversation. Description of pilot boat – diesel launch, black hull, white superstructure, buff funnel and painted in white on bulwarks. Particular light or sound signals to be made by vessels requiring a Pilot – Code Signal 8, i.e. 3 longs 2 shorts. Pilot boat is located in vicinity of Breaksea Lightvessel, or in vicinity of Mercur Buoy, for small vessels. Maintain VHF contact (if possible) with pilot cutter and obey instructions with reference to positioning of vessel to facilitate boarding of Pilots.

ANCHORAGES: Large vessel should anchor in deep water to North of one Fathom banks. Deeper water anchorage (10–14 fathoms) in area between Breaksea Lightvessel and East 1 Fathom Bank Buoys to the South, and shallow water off Barry Roads to the North. Small vessels will find safe anchorage in Barry Roads in varying depth, depending on weather conditions and draft.

RESTRICTIONS: Entrance to Newport Docks is by means of a sea lock 1,000 ft. long, 100 ft. wide.

MAX. SIZE: Max. size of vessels accepted at Newport is 800 ft. long, 96 ft. beam, 33.5 ft. draft.

HEALTH: Port Health Authority board vessel at entrance lock and pratique is automatic.

See "Health – All Ports" before first U.K. port.

RADIO: At sea – Land's End radio station, call sign GIL. Within Bristol Channel radio station Portishead, call sign GK– (last letter according to frequency).

VHF: Vessels requiring entry can contact port on VHF radio Channels 16 and 11.

TUGS: Normally join at Newport Deeps. Ship's line used.

BERTHING: South Dock, normal depth of water 35 ft. North Dock, normal depth of water 27 ft. Junction passage connecting South and North Dock restricts vessels to a max. size of 56 ft. 6 in. beam and 25 ft. draft.

BULK HANDLING FACILITIES: Container terminal on site of former East Lock equipped with derrick crane of 32 tons capacity.

STEVEDORES: Labour is allocated to vessels on arrival.

MEDICAL: No advance notice of medical attention for crew members is required and hospital facilities are available.

DENSITY: Average density of water in docks is 1016.

FRESH WATER: Available at all berths.

FUEL: All classes of fuel available.

GANGWAY/DECK WATCHMEN: Available but not compulsory.

OPENING/CLOSING HATCHES: Normally carried out by crew.

CUSTOMS ALLOWANCE: Tobacco, 0.5 lb. per Crew member, reduced by 50% on coastal trade. 1 pint of spirit and 1 pint wine per Crew member, reduced by 50% on coastal trade.

IDENTIFICATION CARDS: Not required.

REPAIRS: All wet dock and engine repairs possible.

DRY DOCK: 454 ft. × 64 ft.

REPATRIATION: All facilities for the changing of crew and repatriation are available.

AIRPORT: Glamorgan Rhoose Airport terminal 28 miles from Newport. Regular connection planes to London Airport.

TIME: BST, GMT plus 1 hour. GMT in Winter months.

HOLIDAYS: Work not undertaken on Christmas, Easter, Spring and Summer Bank holidays. With the exception of Christmas holiday (25th and 26th December) dates on other holidays vary.

POLICE/AMBULANCE/FIRE: Telephone number 999 stating which service is required.
TELEPHONES: Telephone facilities are available aboard vessels.
SERVICES: Tank cleaning equipment. Facilities for tank washing, compass adjusting are available.
SHORE LEAVE: No restrictions to crew members.
AUTHORITY: British Transport Docks Board.

AGENT: Lambert Brothers Ship Agencies Ltd., 34/38 Stow Hill, Newport, Gwent NPT 1JE. Telex: 49213. Cables: Lambert Newport. Telephone: 0633 62221.

PLYMOUTH: 50.22 N. 04.90 W. (See Plan Book)

DOCUMENTS: Importer to supply Agent with Customs documentation, e.g. original B/L with cheque to cover various details; plus copies of Invoice and Forms C.105 with packing lists. Derating or Exemption Certificate required.
PILOTAGE: Compulsory for merchant vessels. Call sign FSG, or 4 short blasts on whistle. Vessels not subject to compulsory pilotage may obtain docking Pilot in Plymouth Sound otherwise pilot station off Penlee Point.

Pilot boat is motor boat with white upperworks, black hull. "Pilot" in black on wheelhouse.
ANCHORAGES: In Plymouth Sound.
MAX. SIZE: Maximum depth of water 9.0 m. Vessel drawing 8.0 m. would leave anchorage 2 hours before High Water. Also see "Berthing".
HEALTH: Pratique. Apply to Customs Waterguard. Pratique issued when requirements satisfied.

See "Health – All Ports" before first U.K. port.
RADIO: *Pilots:* The calling and listening frequency is 2,182 kHz and the working frequencies are 2,246 or 2,301 kHz. A listening watch is kept on 2,182 kHz at every even hour to 15 minutes past, local time and for longer periods when a ship is expected. The pilot vessel is also equipped with VHF and should be called on Channel 16; the working Channels 6, 8 or 12 should be used for passing messages. Alternatively the shore-based Trinity House pilot station, Plymouth, call sign "Cattewater Harbour Radio", maintains a continuous watch on Channel 16 (calling Channel) and is fitted with Channel 12 (first choice Port Operations Channel).
TUGS: Available in Sound.
BERTHING: The Outer Basin is tidal and enters directly from Plymouth Sound. West wharf, 230 m. length, depth 9.0 m. LWOST.
Trinity Pier, 150 m. length
Mill Bay Pier, 140 m. length.

The Inner Basin, general depth of water 6.0 m., with 8.0 m. depth alongside a 185 m. length of wharf quay.
CARGO HANDLING FACILITIES: Silo for grain imports owned by Spillers Ltd. Calor Gas plant on North Quay for imports of butane and propane gas.

A roll-on/roll-off terminal is in operation.

Victoria Bulk Wharves: Pier No. 1. Length 475 ft. Depth 20 ft. LWOST. Pier No. 2. Length 350 ft. Depth 20 ft. LWOST. Max. beam 38 ft. (Larger with prior notice.) Max. d.w.t. 3,000 tons. Bulk products loaded by conveyor ex-railway trucks and lorry.

Cattedown Wharves: Length 712 ft. Depth 24 ft.–26 ft. LWOST. Max. LOA 560 ft. Max. draft 26 ft. Max. size 12,000 GRT. 1×5-ton and 2×3-ton cranes.

Cattedown Wharves Radio on Channel 12, 16 and 18.
STEVEDORES: British Transport Docks Board: Commodities regularly handled include fresh fruit and vegetables, timber, scrap metal and general cargoes.
MEDICAL: No advance notice required; hospital facilities in Plymouth.
TANKERS: Vessels of the Shell "H" class can be handled at Cattedown Wharves. Max. draft 26 ft. Five hose connections, diameter 10 in. Two for black oil and three for white oil.
FRESH WATER: Available from shore at all berths.
FUEL: All normal grades available at short notice.
OPENING/CLOSING HATCHES: Performed by ship's crew or by stevedores at request of ship.
CERTIFICATES: Tonnage registration.
CONSULS:

Norwegian	65154	Greece	60604
Swedish	65154	Italy	63445
Spanish	65154	Netherlands	64846
French	65154	German	66444
Belgian	65154	Dominican Rep.	63175

REPAIRS: Ship repairing facilities available.
HOLIDAYS: Cargo work can often be arranged on Public Holidays subject to prior notice.
POLICE/AMBULANCE/FIRE: Telephone 999.
TELEPHONES: By special arrangement with the GPO, can be placed on board.
AUTHORITY: British Transport Docks Board.

POOLE: 50.43 N. 01.59 W. (See Plan Book)

DOCUMENTS: As for other British ports.
PILOTAGE: Pilots board 0.5 mile South of Poole Bar Buoy from cutter. Prefer ladder 0.50 m. from water and a good lee. VHF watch kept on Channel 16 working Channel 9. As much notice as possible. Address: Pilots, Poole.
ANCHORAGE: Vessels can anchor anywhere in Poole Bay and Studland Bay. Good holding ground and protected in all but Easterly gale.
RESTRICTIONS: Vessels drawing up to 4.0 m. can enter at any state of tide. Drafts of 5.0 m. must wait to within 2 hours of high water.
MAX. SIZE: Max. length 350 ft., beam – no limit, draft 5.0 m.
HEALTH: See "Health – All Ports" before first U.K. port.
RADIO: Vessels using the Port may call the Harbour Master direct on VHF Channel 16 – working frequency Channel 14 call-sign "Poole Harbour Radio".
TUGS: Join at Stakes Buoy, by special application arrangements can be made to join at North Haven Point. Ship's lines. No difference in charges.
BERTHING: Berthing time depends on draft at some private quays. No restriction at New Quay, Ro/Ro berths in operation.

New Quay: 25 ton heavy lift crane, Transit Warehouse facilities.

Town Quay: Pneumatic Bulk Grain discharging equipment in operation – capacity 550 tonnes per 8 hour working (loading facility and bulk fertiliser handling discontinued).

Yard Quay: Suitable for vessels up to 160 ft. Max. 14 ft. draft. Transit Warehouse facilities available.
BRIDGES: Poole Bridge at West end of Poole Quay. Will open at any time on request by commercial vessel.
STEVEDORES: Normal notice for gangs. No Sunday work.
MEDICAL: Advance notice required for ambulance services. Normal medical and hospital services available.
TANKERS: 3 oil berths. Diameter of load/discharge lines 6 in.
DENSITY: 1021.
FRESH WATER: Delivery 25 t.p.h. by 2 in. hose.
FUEL: Gas oil only.
GANGWAY/DECK WATCHMEN: Not required.
OPENING/CLOSING HATCHES: Work carried out by crew.
IDENTITY CARDS: Not required.
CONSULS: None.
REPAIRS: All types deck and engine repairs can be carried out. Slipways (2) available for vessels up to 220 ft. LOA by 40 ft. beam and 120 ft. LOA by 30 ft. beam.
AIRPORT: Charter flights for crew changes can be carried out from Poole/Bournemouth Airport 7 miles away from port.
POLICE/AMBULANCE/FIRE: Call 999 and ask for service required.
AUTHORITY: Poole Harbour Commissioners.

AGENT: John Carter (Poole) Ltd., The Quay, Poole, Dorset. Tel. Poole 4102. Telex 41176. Cables: Maritime Poole.

PORTSMOUTH: 50.48 N. 01.07 W. (See Plan Book)

DOCUMENTS: (Those marked* to be produced to H.M. Customs Boarding Officer.)
*1 Maritime Declaration of Health.
*1 Crew's Effects List C142
2 Ship's Reports by Master.
*1 Home Office Form 1B6.
*1 Stores List.
*1 Certificate of Deck Cargo Tonnage.
*1 Grain Certificate.
1 Light Dues Certificate.
1 Port Dues Certificate.
*1 Passenger List.
*1 Landing Card for each non-British passenger.
*Ship's Certificate of Registry.
Mercantile Marine Office Certificate (British ships only).
*Load Line Certificate.
*Safety Equipment Certificate.
Lloyds Certificate.
*Derat Certificate.
Ship's Register.
Light Bills.
Safety Radio Certificate.
*List C143 for packages not cargo or crew/passenger effects.
*Danish Tollpass for ships arriving from Denmark.
Form of Authority for Agent to make Report and clear vessel outwards for Master.

Note: Where cargo is to remain on board for unloading at another port after Portsmouth, 3 copies of Ship's Report are required by the Customs House.
PILOTAGE: Portsmouth is within the Southampton and Isle of Wight Trinity House Pilotage District (see Southampton entry for limits of District) and a vessel liable to compulsory pilotage must employ a Pilot from and to the limits of the District. Non-compulsory vessels may obtain a Pilot in the vicinity of the 'Outer Spit' buoy. (Note: All vessels carrying explosives or petroleum products ar !rRY from the 'Outer Spit' buoy and within the Harbour area, but Order in Council. This also applies to regular Home Trade vessels.) Ministry of Defence Pilots must be employed in addition for vessels using Admiralty berths or being assisted by Admiralty-owned tugs.

In addition to 48 hours notice to local Agent, advise Nab, Needles or Portsmouth Pilot, as appropriate, ETA 48 hours and again 2 to 3 hours immediately prior to arrival. The Nab, Needles and Portsmouth pilot stations are maintained by fast launches under the control of the Duty Pilot at the Pilot Station, 37 Berth, Southampton Docks. The Duty Pilot keeps a continuous watch on VHF Channel 16; call sign 'Nabpilot', 'Needlespilot' or 'Portsmouthpilot' as appropriate. Working frequency, Channel 9 only, but can listen on Channels 14, 12 and 6. No medium frequency: M/F and R/T messages via NITONRADIO. Duty Pilot's GPO telephone numbers: Southampton 32345 and 32346.

The launches only put to sea when required. Failure to send an accurate ETA 2 to 3 hours before arrival could cause delay to the offending vessel.

Strict compliance with the requirements of the Merchant Shipping (Pilot Ladders) Safety Rules is requested by the Pilots, who may refuse to board vessels with unsatisfactory and dangerous ladders. Manropes are not required. Ladders should reach to about 3 ft. from the water, each rung resting firmly against the ship's side; a good lee should be provided whilst making approximately 3 to 7 knots headway.

In most cases, vessels bound to and from the Westward will find it more convenient to use the Nab or Eastern approach to Portsmouth. For details of entrances and pilot launches, see Southampton entry.

ANCHORAGES: Small vessels may anchor close Westward of the 'Outer Spit' buoy, unless prohibition signal flying – see "Restrictions". Larger vessels will be allocated a numbered anchor berth in the Spithead Man-of-War anchorage.

Historic Wreck: The wreck of the Tudor warship "Mary Rose" lies in Spithead, in the position of Anchor Berth 3. It is marked by a light-buoy, and anchorage within the area designated on the chart is prohibited.

If anchorage is prohibited in Spithead, St. Helen's Roads, Ryde Roads or Cowes Roads are the nearest safe anchorages. Mooring buoys 1, 2 and 3 off North Corner in the Harbour are sometimes used. Pilots will be fully informed before the vessel's arrival.

MAX. SIZE: Commercial berths: Camber – length 270 ft., draft 16 ft. Flathouse – length 310 ft., draft 18 ft. Albert Johnson Quay – length 350 ft. depth at MLWS, 12.5 ft. Continental Ferry Port Ro/Ro Link span, length of quay 240 ft. Depth 17 ft. LWS max. LOA, 330 ft.

Vessels at the Camber, Flathouse and Rudmore wharves must expect to take the bottom in soft mud at low water Springs.

RESTRICTIONS: The following traffic signals are exhibited and must be complied with by all vessels. Shown by Central Signal Station (C), Blockhouse (B), Gilkicker (G), Dolphin Pier (D) and H.M. ships concerned (S).

Day	*Night*	*Meaning*	*Shown by*
Red flag with white diagonal.	Red Green Green	No vessel to enter or leave harbour or enter approach channel North of Outer Spit Buoy.	C B G
Red flag with white diagonal over black ball.		No vessel to enter harbour or approach channel. Outward shipping may proceed.	C B G
Black ball over red flag with white diagonal.		No vessel to leave harbour. Inward-bound shipping may proceed.	C B G
Black pendant.	White Red Red	No merchant or private vessel to anchor in man-of-war anchorage in Spithead.	G
Answg. Pendant over Pt 0.		All vessels North of Outer Spit keep clear of warship flying this signal	S
Answg. Pendant over Pt. 9.	Green Green Green	All vessels and boats keep Clear of H.M. ships under way.	C B G
Answg. Pendant over flags N E.	Green Red	Proceed with great caution, ships leaving Camber (Not ferries).	B
Answg. Pendant over flag A.	Red Red	Divers down, keep clear.	Diving boat.
Flag E	Orange	Submarine entering or leaving Haslar Lake. At night, light flashes when sub. under way. All vessels keep clear of submarines.	B D

Speed limit of 7 knots in harbour and when within 1,000 yards of shore; 12 knots within 1,000 yards of any H.M. ships and anywhere within the Dockyard Port not covered by the 7 knots limit. Dockyard Port boundaries are shown on Admiralty charts.

Time of entry is restricted by the vessel's draft and state of tide. Enter Camber only at 4 hours before high water or at high water slack. Vessels do not berth at South Railway Jetty from 2 hours before high water until high water.

HEALTH: Foreign arrivals to complete Maritime Declaration of Health. They are cleared immediately on arrival by either a Port Doctor or an officer of H.M. Customs, depending on where ship comes from and whether there is sickness on board.

Vessels arriving from ports within accepted area (North European ports) and coastal arrivals need not present Declaration in all cases; when there is sickness on board, Port Health Authority must be informed, preferably not more than 12 nor less than 3 hours before arrival.

See "Health – All Ports" before first U.K. port.

RADIO: See "Southampton" entry for pilotage communications. Harbour Control is exercised through "Portsmouth Harbour Radio" for commercial traffic on Channels 16 and 11 VHF. Continuous watch is kept during office hours and from 00 minutes until +15 minutes of every hour when office is closed. Gilkicker Radio on Channels 16 and 14 is also available for commercial vessels, and all vessels entering the area bounded by the "Warner" buoy in the East and the "Sturbridge" buoy in the West should contact Gilkicker, even if only passing through the District. Channel 13 is the working channel for H.M. ships and the Q.H.M.'s office; call sign "Central". H.M. ships are required to keep a listening watch on Channel 16 when in the Portsmouth and Southampton control areas, and will 'shift' to working frequencies selected by mutual agreement. Gilkicker is also equipped for visual signalling. Medium frequency calls to Pilots and Port Authorities only available by link call through Nitonradio.

TUGS: 200 ton tug with bollard pull of 2 tons (must be ordered well in advance of arrival) and several tow-boat launches are available for commercial vessels at commercial berths. Two 1,600 h.p. diesel paddle tugs, 5 screw tugs and 3 Voith-Schneider water tractors are available for larger vessels at Admiralty berths.

STEVEDORES: Registered dock workers and cranes must be ordered by 1500 hrs. on the day previous to commencement of discharge or loading, depending upon receipt of exact ETA from Master.

MEDICAL: All medical facilities available. Agent should be advised in advance. (See "Southampton" entry if arrival is solely to land sick personnel.)

CUSTOMS ALLOWANCE: As for "Southampton".

DENSITY: 1025 salt water.

FRESH WATER: Available.

FUEL AND DIESEL OILS: Available by road tanker or bunker barge from Fawley.

FIRE PRECAUTIONS: Notices will be delivered to Master if berthing at any jetty where special precautions apply.

OPENING/CLOSING HATCHES: By ship's crew.

CRANES: 3 mobile cranes of 15 tons, 4 mobile cranes of 5 tons and 3 mobile cranes of 2 tons capacity are provided by the Port Authority.

CONSULS:

Belgium	Finland	Netherlands	Sweden
Denmark	France	Norway	

REPAIRS: Minor deck and engine repairs can be carried out locally. Larger repairs and dry dock facilities at Southampton.

AIRPORT: Fast train service from Portsmouth to London Airport. Eastleigh airport local, but mainly short flights to Channel Islands and feeder services.

SERVICES: All marine, radio and radar services can be obtained from Southampton.

REPATRIATION: All facilities exist.

TELEPHONES: None on board.

DEVELOPMENTS: With the opening of the Portsmouth section of the M27 and M275, there is immediate access to the Flathouse and Albert Johnson quays at the Rudmore Roundabout. At present, Thoresen operate daily services to Cherbourg and Le Havre, Brittany Ferries twice daily to St. Malo and Sealink daily to the Channel Islands.

AUTHORITY: Port Manager and Harbour Master, City of Portsmouth for Commercial berths.

PORT TALBOT: 51.35 N. 03.49 W. (See Plan Book)

DOCUMENTS:

Ship's Register.
Test Certificate for ship's gear.
Manifest.
Master's Report to be completed on arrival.
Customs and Health documents as required by H.M. Customs and Port Health Authorities, to be completed on arrival.

PILOTAGE: Station – Swansea Bay. Usual International signals. VHF Channels 16 and 12.

ANCHORAGES: Swansea Bay.

RESTRICTIONS: *Ore terminal* in New Harbour, entrance channel 1.5 miles long, 550 ft. wide. Depth 60 ft. MHWS, 53 ft. MHWN.

MAX. SIZE: *Ore terminal* – 100,000 tons d.w.t. ore carriers – draft 49 ft.

HEALTH: See "Health – All Ports" before first U.K. port.

TUGS: Off Breakwater.

BERTHING:

New Harbour. British Steel Corporation provide 3 unloading appliances on the jetty and also a conveyor-belt system to carry the iron ore to the stocking ground close to harbour and steel works. Grabs on the unloading appliances weigh 22 tons each, and each have a pay-load of 22 tons. The 3 discharging appliances together have an unloading rate of 5,400 t.p.h. Average rate throughout discharge from start to finish of the 3 discharging appliances together is 2,700 t.p.h.

STEVEDORES: ETA advices sent by vessels to local Agent and then advised to British Steel Corp. as stevedores. Labour ordered by Agent from B.S.C.

DENSITY: Ore Terminal 1025.

FRESH WATER: By gravity 10 t.p.h. Harbour pumping 100 t.p.h.

FUEL: By barge or road tanker. Any grade available.

GANGWAY/DECK WATCHMEN: None, but bye-laws state that vessel must be manned.

OPENING/CLOSING HATCHES: Performed by crew.

CUSTOMS ALLOWANCE: Tobacco, 1 oz. per day per man, max. 8 days. Wine/Spirits, 0.25 pint per day per man, every 4 days.

IDENTIFICATION CARDS: Docks Police would require identification to be available.

CONSULS: None at Port Talbot; contact Swansea.

REPAIRS: Facilities exist.

REPATRIATION: All facilities exist.

AIRPORT: Rhoose Airport 25 miles away. Mainly short trips connecting with main airports.

TIME: GMT plus 1 hour. GMT in Winter months.
HOLIDAYS: It is the custom, at the Tidal Harbour, to work on Bank Holidays.
POLICE/AMBULANCE/FIRE: Dial 999 and ask for service required.
TELEPHONES: Can be connected on board.
AUTHORITY: Docks Manager, British Transport Docks Board.

SCALLOWAY: 60.08 N. 01.16 W. (See Plan Book)

Scalloway is a small port on the Atlantic side of the Mainland of Shetland. It is only 7 miles by road from Lerwick and many of the services are provided by officials and Agents in Lerwick.
PILOTAGE: Application for Pilot through Scalloway Harbour Radio, Channel 16 VHF. 1 hour advance notice. No particular light or sound signals required. Usual station off Fugla Ness lighthouse on the island of Burra. Alternative station at entrance to North Channel. Vessels awaiting Pilot lie or anchor off Figla Ness lighthouse.
ANCHORAGES: Good holding bottom in Scalloway Bay.
RESTRICTIONS: No night time or tidal restrictions. Detailed and up to date charts essential.
MAX. SIZE: Only restriction, draft limit of 23 ft.
HEALTH: See "Health – All Ports" before first U.K. port.
RADIO: Wick radio.
VHF: Vessels should switch to Channel 16 VHF when in vicinity of harbour.
CRANES: Mobile cranes available. Ships usually employ their own cranes.
BULK CARGO FACILITIES: Deep water berth 200 ft. long able to accommodate vessels up to 300 ft. long. Minimum depth varies from 30 ft. at point of pier to 19 ft. at inner end.
STEVEDORES: Should be arranged through Agents.
MEDICAL: Doctor based at Scalloway. Hospital at Lerwick.
FRESH WATER: Available from standpipe. 7 t.p.h. 16p. per ton.
FUEL: Marine gas oil by pipe or from road tanker. 1 hour advance notice.
REPAIRS: Most types deck and engine repairs.
SLIPWAYS: Slip accommodation for vessels up to 180 tons.
SURVEYORS: Lloyds represented at Lerwick.
CUSTOMS ALLOWANCE: See "Lerwick".
REPATRIATION: Facilities for effecting crew changes.
AIRPORT: Sumburgh Airport 25 miles. British Airways several times daily. Tingwall Airstrip 3 miles.
HOLIDAYS: Cargo or shipping operations not affected by holidays.
POLICE/AMBULANCE/FIRE: Dial 999.
TELEPHONES: No arrangement for placing telephones on board.
SERVICES: Compass adjusting.
SHORE LEAVE: Crew members allowed ashore.
GENERAL: Local shipping Agent Mr. A. S. Fraser, Blacksness Pier. Tel. Scy 636. Pier Master: Magnus Tulloch. Roselea, New Rd. Scalloway. Tel. Scy 324.
AUTHORITY: Shetland Islands Council, Lerwick.

SCAPA FLOW, Orkney Isles (Flotta Terminal): 58.53 N. 03.05 W. (See Plan Book)

OPERATOR: Occidental of Britain Inc.
DOCUMENTS:
Maritime Declaration of Health (Form supplied by Pilot or Agent).
Vaccination List.
Immigration Form H.O. Form IS6.
Crew Lists — 2 required.
Ship's Stores List.
Crew Personal Effects Declaration, Customs Form C.142.
Last Port Clearance.
Ship's Register.
Load Line Certificate.
Safety Construction Certificate.
Safety Radio and Safety Equipment Certificates.
Deratisation Certificate.
Previous British Light Dues Receipts.

Customs and Health: Weather permitting, Customs, Immigration, Health and Agent will embark with the Pilot.

Customs House: Customs clearance inward and outward will be the responsibility of ship's Agents.

Light dues will be paid by the vessel.

Bills of Lading: Bills of Lading; Cargo Manifest, Quantity and Quality Report; Tanker Time and Loading Report; Certificate of Origin; Ship's Cargo and Ullage Reports; Master's Receipt for Shipping Documents and Documentation Transmittal Reports will be prepared by Company Representative.

It is hoped that early departure procedure will be applied in many cases in order to minimise time spent awaiting documentation. Under this the vessel will sail with the Manifest and Bills of Lading with the tonnage omitted, and the figures for insertion will be radioed to the vessel as soon as they are available in order that the Master may insert them.

Ship's Agent: All ship's business other than Cargo and Customs documentation and the shipping documents under section above will be conducted by the ship's Agent.

PILOTAGE: Pilot vessels *Scapa Pilot* and *Scapa Patrol* watch VHF Channel 16.

Inside pilot station (58° 46′ N., 03° 07′ W.) located 2.0 miles 180° from Cantick Head Lighthouse.

Unfamiliar vessels, VLCCs, also any vessel without full information about the unusually strong currents in Pentland Firth is recommended to embark the Pilot at the appropriate outside position (Refer to Tidal Stream Atlas, Admiralty Publication H.O. Number NP 209).

Port restrictions which may cause delays: Weather preventing embarkation of Pilot at either inside or outside positions.

Local wind conditions in Scapa Flow preventing a safe approach to the berth.

Remarks: In Scapa Flow the weather conditions, in particular the wind, can change suddenly and quickly deteriorate, not only in Winter but at any time of the year.

Mooring Masters: A Company Mooring Master will board vessels to the Northward of the Calf of Flotta or at her designated anchorage within Scapa Flow prior to berthing at any Terminal Facility. A Company Mooring Master will be on board during the time that a vessel is moored and he will liaise between the Terminal and ship personnel throughout any deballasting, loading or discharging operation.

The Company Mooring Master may ensure that Masters of vessels are familiar with, and strictly observe, all local regulations concerning the safety of operations and pollution of the sea by oil whilst laid at the Company's facilities.

Vessels using the Company's facilities are required to provide the Mooring Master with accommodation and messing of a standard equivalent to that enjoyed by the vessel's officers.

ANCHORAGE: Inside Scapa Flow several anchorages are available depending upon prevailing winds. Sea anchorage outside, in the approaches to the Pentland Firth, is not possible.
APPROACHES: The approach to the Terminal is through the Pentland Firth from East or West, and then Northward through Hoxa Sound, the main entrance to Scapa Flow. Consult Admiralty Sailing Directions Vol. 1, and Admiralty Tidal Stream Atlas for Orkney and Shetland, Publication No. 209. Principal charts are as follows and Decca coverage is available: Admiralty Chart Nos. 2162, 2581, 35.
MAX. SIZE: See "Berthing".
HEALTH: See "Health – All Ports" before first U.K. port.
RADIO: Arrival Notices.

Pilots: By coastal radio station 24 and 12 hours prior to arrival. VHF contact at least 3 hours prior to arrival at the pilot station.

Terminal: By coastal radio station 7 days, 72, 48 and 12 hours prior to arrival at the pilot station.

VHF contact should be established at least 3 hours prior to arrival at the pilot station.

The Terminal must be advised by VHF via the "Harbour Control", when the Pilot has boarded or when 6 miles from Stanger Head at the entrance to Hoxa Sound.

INFORMATION REQUIRED PRIOR TO ARRIVAL:

Radio advice prior to arrival: Terminal operated by Occidental of Britain, Flotta Terminal, telex 75212 (OXYOPS G), via Portishead Radio, of ETA with following details. Also advise Agent of ETA, drafts fore and aft for arrival, and any immediate requirements on arrival.

aaa – Arrival and sailing drafts.
bbb – Gross, net and Summer d.w.t.
ccc – Last port and destination.
ddd – Cargo requirements in metric tonnes.
eee – Maximum loading rate.
fff – Grade of previous cargo.
ggg – Quantity of slops, water content, where stowed, if detergents used during tank cleaning.
hhh – Quantity of clean cargo tank ballast and geographical position uplifted.
jjj – Quantity of permanent ballast and geographical position uplifted.
kkk – Total time for deballasting.
lll – Possibility to load and deballast simultaneously maintaining a 2 valve separation?
mmm – Number and size of cargo manifolds.
nnn – Availability of reducers to adapt manifolds to suit 16 in. (150 ASA) flanges (3 required)?
ooo – If bow mooring device fitted, diameter of pin and width jaw end link of mooring 80 mm. in diameter (2 mooring lines required forward).
ppp – Maximum 10 tons SWL derrick required on portside.
qqq – Accommodation ladder rigged to starboard.

Update ETA 48 hours and 24 hours prior arrival.

VHF: *Harbour Pilots and Harbour Control:*
VHF Listening: 16 Telex: 75412
Working: 9, 11 and 20

Mooring Masters/Terminal:

Mooring Masters	161.15	Private Frequencies Only
Terminal	161.30	
Loading Operations	161.15	Private Frequencies Only
,, ,,	161.30	

N.B. Launches are fitted with VHF Listening Channel 16
Working Channel 14, 12, 8, 6

TUGS: 2 tugs (each 2,500 h.p.,of 37 tons bollard pull) are available, and compulsory, for berthing. They are both fire fighting tugs and equipped with Warren Springs pollution dispersent equipment.

Whenever a tanker is on a berth, 1 stand-by tug is anchored in the close vicinity for safety and pollution purposes. Fire wires must be rigged off-side forward and aft.

READINESS: *Notice of Readiness to load/discharge:*

Notice of Readiness will be accepted subject to the following conditions;—

a. The Terminal is open (this decision shall be communicated to the Master of the vessel by the Company).

b. i) The vessel has been boarded by the Company Mooring Master prior to her proceeding towards the berth or

ii) The vessel has anchored within the anchorage area awaiting a berth.

N.B. Although vessels will be loaded in order of Acceptance of Notice of Readiness, it should be borne in mind that Acceptance of Notice of Readiness is contingent upon complete compliance with all the requirements of Port Conditions.

c. Acceptance of Notice of Readiness may be withdrawn by the Company upon the occurrence of any of the following events:—

The decision by the Mooring Master that the vessel's drafts, equipment and/or appurtenances are not suitable for berthing at the Terminal. If this decision has not been taken, for reasons within the Mooring Master's control, within 24 hours from Acceptance of Notice of Readiness, the Company shall be deemed to have waived its right to withdraw acceptance under this sub-paragraph.

Any supervening decision of the Harbour Authority which prevents the vessel from berthing.

N.B. A derrick or crane with a safe working load of not less than 7.5 tons is required for handling hoses at the SPM berths.

BERTHING:

Position:

SPM 1: Lat. 58° 52′ 11.86″ N. Long. 3° 07′ 20.68″ W.

SPM 2: Lat. 58° 52′ 17.72″ N. Long. 3° 05′ 47.79″ W.

Main Control Building (Radio Mast): Lat. 58° 50′ 31.05″ N. Long. 3° 07′ 08.01″ W.

SPM Particulars:

Pillar Type Single Buoy Mooring – 2.
Tanker Size – 35,000 – 200,000 d.w.t.
Minimum Water Depth – 75 ft.
Max. Draft – 72 ft.
Mooring System Chain: 2.625 in.×200 ft. with floatation.
Crude Manifolds – 2×16 in.
Ballast Manifolds – 1×16 in.
Maximum Loading Rate – 80,000 bbls.p.h.
Hose Weight – Minimum 7.5 tons

Ballast connection is positioned aft of the 2 crude connections.

A load monitoring system is fitted to each SPM giving constant strain readings to the Terminal Control Room and the Mooring Master on board the tanker. In adverse weather conditions strain gauge readings will indicate when vessel should prepare to vacate the berth.

LPG/Crude Oil Jetty:

Finger type jetty with breasting dolphins.
Tanker Size – 4,000 – 150,000 d.w.t.
Minimum Water Depth – 63 ft.
Maximum Draft – 62 ft.
LPG Manifolds – 1×10 in. loading plus 1×10 in. vapour return.
LPG Loading Rate – 10,000 bbls.p.h.
Crude Manifolds – 4×16 in.
Crude Loading Rate – 80,000 bbls.p.h. maximum.
Ballast Manifold – 1×16 in. (crude gantry only).
Maximum Deballasting Rate – 40,000 bbls.p.h.

Terminal Capacity:

1. Crude Oil:

There are 5 tanks, each of 500,000 bbls. nominal capacity for storage of stabilized crude oil, plus a further 2 of 1,000,000 bbls. each.

2. Liquid Petroleum Gas:

There are 2 tanks, each of 100,000 bbls. nominal capacity for storage of propane.

Remarks: In certain current and wind conditions on the SPMs, it may be desirable to keep the propeller turning very slowly astern to prevent overriding, or, possibly some revolutions ahead in an attempt to reduce the tension in the mooring chain during strong winds.

When ship's piping does not permit the pumping of permanent ballast through the manifold, the possibility to load some cargo prior to deballasting the cargo tanks' clean ballast may be granted by prior arrangement with the terminal. In all cases where ships intend to deballast and load simultaneously there must be at least a 2 valve separation.

DENSITY: 1025.

MOORING AND HOSE HANDLING:

On SPMs: Ship's derrick and manifold connections will require to be prepared on the port side. An accommodation ladder will be rigged to starboard with a pilot ladder ready to port.

Securing equipment for single chain mooring forward and hose connecting gear will be hoisted on board from Company work launch by ship's derrick. A good mooring line will be required from forecastle head as a messenger for the buoy mooring.

Tanker Loading Pier: The loading pier is equipped with rigid articulated pipe arms mounted on gantries for loading liquid petroleum gas and also for loading crude oil. The crude oil gantry is also fitted with a ballast discharge arm.

There is an access roadway between the Pier head and the shore. Mooring lines are run to dolphins by terminal mooring boats. Vessels with tension winches when moored at the pier must have winches on 'Manual brake'.

Arrival Draft: Vessels must arrive at the Company's facility in an adequate ballast condition compatible with safe manoeuvring during handling. Excessive trim or insufficient ballast could incur delay until such time as an acceptable condition is reached.

BALLAST: All berths are equipped with water ballast discharge lines. There is a water ballast tank of 500,000 bbls. capacity and a ballast treating facility capable of handling 40,000 bbls.p.h It is prohibited to discharge water ballast into Scapa Flow.

Bilge Ballast Discharge: Vessels should arrive in Scapa Flow with clean ballast only.

The discharge of bilges and/or ballast by vessels into Scapa Flow is strictly prohibited.

N.B. All ballast water including permanent ballast must be discharged through the Terminal ballast reception and cleaning facility.

Discharge of ballast and simultaneously lifting of cargo is not permitted unless approval has been given by the Mooring Master.

The salvage in ballast shall become the property of the Company, in consideration of the Company's operation of the Terminal ballast reception and cleaning facility.

MEDICAL: Medical and dental services are available by arrangement. Hospital facilities are available at Balfour Hospital, Kirkwall.

FRESH WATER: Only available from 1 water barge of 200 tons capacity, rate 30 to 40 t.p.h. Cabled advice or requirements helpful.

FUEL: Bunkers not available at present, but lubricants in small quantity available. Ships should cable requirements to Agent as soon as possible.

REPAIRS: There are no dry-docking facilities available, but local engineering firms undertake minor repairs to machinery and equipment.

Immobilisation of engines: Not allowed on any of the berths, and not recommended when at anchor. When at the anchorage, however, in special circumstances, and provided the Harbour Master's permission is first obtained, it may be possible.

TRAVEL: There are daily air services, during the week, to Aberdeen, Inverness, Glasgow and Edinburgh from Kirkwall Airport. There is no service on Sunday, There is a daily ferry service from Stromness to Scrabster to connect with British Rail. During the Winter months there is no service on Sunday.

CONSULS: Denmark, Netherlands, Norway and West Germany.

LAUNCH SERVICES: Launch services from Flotta and SPM berths are available by arrangement with local Agents to Kirkwall/Stromness.

SHORE LEAVE: There are no restrictions on shore leave for ships' personnel. For vessels moored at SPMs arrangements can be made with the Agent for a launch service to be operated to the shore. For safety reasons, the boat selected for this service must have good stability, to prevent accidents in cases of hazardous boarding due to weather conditions.

SAFETY: Should communications fail, the Mooring Master will authorise continuous soundings of the Ship's whistle or siren as a signal to stop loading (ships in the vicinity capable of so doing should inform the Terminal Control by VHF that this signal is being sounded in case it is inaudible ashore). Ships hearing the signal and unable to contact the Terminal should inform "Harbour Control"

SERVICES: Stores are of good quality, and the laundry facilities are good, but limited. Tank cleaning and dirty ballast facilities are not available.

GENERAL:

Accidental Spills and Leakage: All oil spills and leakages must be immediately reported to the Mooring Master, who will inform the Harbour Authority forthwith. All deballasting/loading/discharging operations will be immediately suspended until the cause of the spill/leakage has been determined, and rectified to the satisfaction of the Mooring Master, and the Harbour Authority.

Galley and Other Refuse: Dumping of all refuse into Scapa Flow and approaches is prohibited. Refuse must be retained on board in sealed containers. (Vessels in port over a long period may make arrangements with their local Agent for collection).

Lighting: Sufficient lighting must be provided in the way of all overboard discharge points to facilitate detection of leaks or spillage. Adequate lighting must also be provided at the loading manifold.

Lifting of Stores; When tankships are at SPM's, loading or off-loading of stores, provisions, drums or any other goods or articles on, to or from the main tank deck is prohibited while cargo is being lifted.

Under certain circumstances and with the approval of the Company's Mooring Master, stores may be worked on the poop during the cargo lifting.

When tankships are moored at the pier, vessels and boats are prohibited from coming alongside during cargo lifting, unless all cargo operations are shut down, all tank openings are closed and secured, and permission from the Mooring Master has been obtained.

Working of stores over the pier will not normally be allowed.

During Loading/Deballasting Operations at SPM's: Mooring Masters will carry Company communication equipment. Ship's VHF must also be available to the Mooring Master at all times. Ship's whistle must be available throughout the time a Mooring Master is on board.

Emergency signals in the event of complete communication failure will be as follows:—

By day: Continuous blasting of ship's whistle accompanied by the hoisting of 2 black balls in a position conspicuous to the Terminal Control Room.

By night: Continuous blasting of ship's whistle accompanied by continuous flashing on an Aldis type signal lamp aimed towards the Terminal Control Room.

In the event of such a communication failure all loading operations shall cease until an effective means of communications has been established.

AUTHORITY: Orkney Islands Council, Kirkwall, Orkney.

AGENT: John Jolly, 21 Bridge Street, Kirkwall, Orkney Isles. Telegraphic Address: "Jolly Kirkwall Telex", Telex 75253. Tel. Kirkwall 2268 (24 hrs. answering service) and 3462. VHF call sign (Private frequency 161.25 mHz): Jolly.

SHARPNESS and GLOUCESTER: 51.43 N. 02.29 W. (See Plan Book)

The Port of Gloucester comprises the wet docks at Sharpness and Gloucester which are connected by a ship canal named "The Gloucester and Berkeley Canal".

PORT LIMITS: Sharpness Dock entrance.

DOCUMENTS:
1 Maritime Declaration of Health.
1 Crew's Effects List.
2 Ship's Report by Master.
1 Home Office Form 1B.6.
1 Stores Lists.
1 Certificate of Deck Cargo Tonnage.
1 Grain Certificate.
1 Light Certificate.
1 Port Dues Certificate.
1 Passenger List.
1 Landing Card for each passenger.
Ship's Certificate of Registry.
Mercantile Marine Office Certificate (British ships only).

In addition Manifests and Bills of Lading are usually sent to Agent direct from loading port.

PILOTAGE: Pilotage is compulsory. Masters of vessels bound for the Ports of Gloucester, Sharpness, Chepstow and Lydney requiring the services of a Pilot at the Barry Roads Station must give at least 24 hours of their intended arrival at the Pilot Station. Failure to give this notice could lead to a vessel being delayed. Draft and G.R.T. are also required. Masters who expect their passage time to be less than 24 hours should send advice from their sailing port with gross tonnage, draft, speed and ETA. Masters of vessels bound for Chepstow should also state mast height above the appropriate water line and whether masts can be lowered. (Vertical clearance limited by Bridge to 52 ft. (15.8 m) above M.H.W.S.)

Vessels are boarded at Barry Roads by the Cardiff Pilot Cutter which is equipped with VHF. Radio contact with the Cardiff Pilot Cutter should be made not later than 1 hour before arrival at Breaksea L.V. In fog ships sound "9" (4 longs, 1 short). Pilot replies the same. Masters can send ETA's direct to the Pilotage Agent, Sharpness. Telephone Sharpness 323.

Dock Pilots: Dock Pilots are available, not compulsory but advisable for berthing in Sharpness Dock, transit of the Sharpness Canal and in Gloucester Dock.

ANCHORAGES: Barry Roads afford good anchorage in moderate weather for vessels awaiting a Pilot.

RESTRICTIONS: Three feet water clearance over outer sill for vessels of maximum draft 21 ft. 6 in. Neap tides impose certain restrictions.

Note: The River Severn at Sharpness dries out at low water.

MAX. SIZE: Maximum Length — no restriction. Maximum beam — 55 ft. Maximum draft — 21 ft. 6 in.

HEALTH: See "Health – All Ports" before first U.K. port.

RADIO: Niton Radio, Lands End Radio, Ilfracombe Radio.

VHF: Sharpness Radio Channels 16 and 14. Range normally within pilotage waters only.

TUGS: *(River):* Larger vessels normally pick up tugs off Avonmouth if required by Pilot. *(Dock Tugs):* Not suitable for river work. Two tugs available in Sharpness Dock and for use between Sharpness and Gloucester if required. All tugs take ships lines.

BERTHING: Max. draft 21 ft. 6 ins. Fresh Water. Range of dock level 9 in.

Available Berths: 10 to 14 berths depending on ship length. This includes a Container berth and a scrap berth. Available length of Quay — 12,000 ft.

Cargo Equipment and Methods: Cranes 8 × 3-tons, 2 × 6-tons (3 × 6-tons) all Portal and 1 Scotch Derrick of 32 tons. Grabs, Slings and Pallets, etc. Load/discharge by shore gear.

BULK CARGO FACILITIES: 2 grain silos, 1 fixed suction plant.

STEVEDORES: British Waterways Board.

MEDICAL: Absolutely necessary for Agent to have as much notice as possible if any medical attention is required. All facilities available.

DENSITY: 1000/1003.

FRESH WATER: Available by stand pipe, 20 t.p.h.

FUEL: Through Agents, 12 hours notice, most grades available.

FIRE PRECAUTIONS: According to local laws available on request.

CONSULS: See "Bristol".

REPAIRS: All types of deck and engine repairs are possible.

DRY DOCK: 360 ft. by 47 ft. by 14 ft. over blocks.

SURVEYORS: Most Societies are available.

GANGWAY/DECK WATCHMEN: Ships personnel, but watchmen can be arranged if necessary.

HATCHES: Opened by ship's crew.

CUSTOMS ALLOWANCE: Tobacco — Home Trade, equivalent to 0.25 lb. tobacco. Foreign Trade, equivalent to 0.5 lb. tobacco. Wine and/or Spirits — Officer, equivalent of 1 quart of wine per day. Crew, equivalent of 1 bottle of wine in 4 days.

REPATRIATION: All arrangements through Agents.

AIRPORT: London or Birmingham within 2 hours. Local taxi service available.

TIME: BST is GMT plus 1 hour. GMT in Winter months.

HOLIDAYS: Easter (varies). May Day. Spring Bank Holiday (last Monday in May). August Bank Holiday (varies, usually last Monday in August). Christmas Day (25th December), Boxing Day (26th December). Work can usually be arranged on these holidays although unusual to work 25th/26th December.

POLICE/AMBULANCE/FIRE: Telephone 999 ask for service required.

TELEPHONE: No ship to shore connection. Public telephone kiosks available.

SERVICES: Taxi. Laundry. Ship chandlery.

SHORE LEAVE: Possible.

IDENTIFICATION CARDS: Not necessary unless being repatriated.

REGULATIONS: British Waterways Board Byelaws 1962.

GENERAL:

Gloucester and Berkeley Canal and Gloucester Dock:

Maximum size of Vessel: Length 190 ft. Beam 29 ft. 6 in. draft 11 ft. 6 ins.

BRIDGES: 16 swing bridges between Sharpness and Gloucester. No mast height restrictions.

AUTHORITY: British Waterways Board, Dock Office, Sharpness.

SHOREHAM: 50.50 N. 00.15 W. (See Plan Book)

DOCUMENTS and all general information, refer to "London". Distance from London, 50 miles.

PILOTAGE: Trinity House Pilotage Service. Pilot Cutter equipped with VHF.

ANCHORAGE: Off Harbour. Depths as per English Channel Charts.

RESTRICTIONS: No night restrictions. Port normally accessible 4 hours before and 2 hours 40 minutes after high water. According to size and draft these times can be extended.

Main entrance channel, 400 ft. wide, leads into a 300 ft. channel to the Eastern arm, and a 135 ft. channel for the Western arm.

Dimensions of Prince Philip Lock: 374 ft. length, 57 ft. width.

MAX. SIZE: Length 347 ft. 06 in. Draft 21 ft. subject tide.

HEALTH: See "Health – all ports" before first UK port.

RADIO: Niton Radio/Northforeland Radio.

Port operation and information service manned continuously, contact by VHF calling Channel 16, working Channel 14. Station is situated on the middle pier.

TUGS: One tug, subject to availability. Tug lines used for which no extra charge.

BERTHING: Vessels passing lock gates have locking period of 4.5 hours before high water to 2 hours 40 minutes after – both according draft. Heavy lift crane, 35 tons capacity for container handling.

A bulk wine terminal capable of handling 1,250,000 gallons of wine is available.

A Ro-Ro berth has been constructed at the East end of Aldrington Basin.

STEVEDORES: Reasonable ETA is sufficient for gangs to be called.

MEDICAL: All facilities available.

DENSITY: Approx. 1025.

FRESH WATER: Available at most berths.

CONSULS: Danish.

DEVELOPMENTS: The gasworks of 32 acres have been purchased and developed.

AUTHORITY: Shoreham Port Authority.

SOUTHAMPTON 50.54 N. 01.24 W. (See Plan Book)

DOCUMENTS:
1 Maritime Declaration of Health.
1 Crew's Effects List.
2 Ship's Report by Master.
1 Home Office Form 1B6.
1 Stores List.
1 Certificate of Deck Cargo Tonnage.
1 Grain Certificate.
1 Light Certificate.
1 Port Dues Certificate.
1 Passenger List.
1 Landing Card for each Passenger.
Ship's Certificate of Registry.
Mercantile Marine Office Certificate – for British ships only.
Load-line Certificate.
Safety Equipment and Safety Construction Certificate.
Lloyds Certificate.
Derat Certificate.
Ship's Register.
Light Bills.
Safety Radio Certificate.

In addition, Manifests and Bills of Lading are usually sent to Agent direct from loading port.

PILOTAGE: Compulsory, with usual regular Home Trade and other small exemptions. In addition to 48 hours notice to local Agent, advise Nab or Needles Pilot as appropriate, ETA 48 hours and again 2 to 3 hours immediately prior to arrival. The Nab and Needles stations are maintained by fast launches under the control of the Duty Pilot at The Pilot Station, 37 berth, Southampton Docks. Duty Pilot keeps a continuous watch on VHF Channel 16; call sign NABPILOT or NEEDLESPILOT as appropriate. Working frequency; Channel 9 only, but can listen on Channels 6, 12 and 14. No medium frequency: M/F and R/T messages via NITONRADIO. Duty Pilot's GPO telephone numbers: Southampton 32345 and 32346.

The launches only put to sea when required. *Failure to send an accurate ETA 2 to 3 hours before arrival could cause delay to the offending vessel.*

The Nab and Needles stations also provide Pilots for vessels bound for Portsmouth, Cowes or other small ports within the Trinity House Southampton and Isle of Wight Pilotage District. The limits of the District are defined by a line drawn from a point 180° – 1 mile from Selsey Bill to a position in 50° 40' N., 0° 57' W. (Nab Tower), thence to a point 180° – 1 mile from Culver Cliff, thence to a position 180° – 1 mile from St. Catherine's Lighthouse and thence direct to Peveril Point, but excluding the Poole Pilotage District (q.v.).

Strict compliance with the requirements of the Merchant Shipping (Pilot Ladders) Safety Rules is requested by the Pilots, who may refuse to board vessels with unsatisfactory and dangerous ladders. Manropes are not required. Ladders should reach to approximately 3 ft. from the water, each rung resting firmly against the ship's side; and a good lee provided whilst making approximately 5 to 7 knots headway.

Eastern Approaches or Nab Tower. The station is maintained by 40-ft. fast launches, black hulls, white wheelhouses, showing international signals. VHF Channels 6, 9, 12 and 16. Vessels under 40 ft. draft are normally boarded between the "New Grounds" and "Dean Tail" light buoys, approximately 2 miles NNW of Nab Tower, although in bad weather, boarding at the "Warner" buoy or St. Helen's Roads might be advised by the Duty Pilot. Launches operate from Ryde pier or from Portsmouth Harbour.

Vessels over 35 ft. draft are restricted by tide for time of entry, and will be advised by the Duty Pilot. Vessels of 40 ft. draft and over use the Nab Channel and a message advising Tanker Master of transit times will be sent by Essoship Fawley and confirmed prior to arrival by Duty Pilot by VHF.

The Nab Channel has a limiting depth of 39.7 ft. (although 43 ft can be carried to West of centre line (1976)) below Chart Datum (April 1976). Pilot will board all vessels of 40 ft. draft and over in a position 2 to 3 miles South of the Nab Tower. Masters of such vessels are strongly recommended not to approach closer than 2 miles to the Nab Tower without a Pilot, owing to strong tidal streams. It is advisable for a deep-drafted ship to anchor 3 miles South of the Nab Tower if waiting for the tide. Advice will always be given on request to the Duty Pilot by VHF.

Pilot *will not* board vessels under 40 ft. draft outside the defined pilotage district unless specifically requested by the Master to do so. The additional "Out of District" charge for boarding beyond the normal limits will be debited to Owners.

Western Approach – Needles: Vessels drawing more than 31 ft. are advised to enter via the Nab. Masters are strongly urged not to proceed beyond the Fairway Buoy without a Pilot, especially on the flood tide. Safe anchorage in vicinity of "Fairway" Buoy.

Station maintained by 40 ft. fast launch, black hull and white wheelhouse, showing international signals. Launch operates from Yarmouth Harbour or Lymington. Needles pilot launch is fitted with VHF Channel 6, 9, 12 and 16. No medium frequency.

When it is considered that the weather is deteriorating to the extent that the boarding and landing of Pilots could in the near future become dangerous, a message will be sent to all ships through Nitonradio, as follows:

"Needles Pilot operating bad weather routine. Vessels should ascertain at least 3 hours before their ETA Needles whether a Pilot will be available. This information can be obtained either through Niton Radio or direct from Needles Pilot on VHF."

If it is not safe to ship or land the Pilot at the Needles, Masters will be advised to proceed to the Nab.

In poor visibility a vessel requiring Pilot at either Nab or Needles uses a distinguishing signal of "G" to which the pilot launch will reply with "H".

GENERAL NAVIGATION: A Duty Operations Officer, responsible to the Dock and Harbour Master Southampton maintains a continuous watch in the Port Signal and Radar Station (37 Berth): call sign "Southampton Port Radio". He is to be informed prior to any movement to, from or within the port area and will give information on the movement of other vessels.

Harbour Radar Information and guidance will be given on request. The Radar reference line shown on the Admiralty Charts is superimposed on the Harbour Radar displays.

Particular attention should be paid by Masters to the designated "Reporting Points" marked on the Admiralty Charts. Reports should be made on VHF to Southampton Port Radio, to enable the proper identification and co-ordination of the ship movement, to be made to the benefit of all mariners navigating within the Solent area. This applies equally to naval and to non-compulsory vessels.

The following VHF Channels are operated within the port.

Southampton Port Radio: Channels 16, 14, 12, 18, 20 and 22.

Harbour Patrol Launch (Call sign Southampton Patrol) Channels 16, 14, 12, 10, 8 and 6.

Nab and Needles Pilot Launches: Channels 16, 14, 12, 9, 6 and 0.

Nab and Needles Pilot Stations: Channels 16 and 9. (Duty Pilot).

Southampton Pilot Launch (call sign Southampton Pilot) Channels 16, 14, 12, 9, 6 and 19.

Southampton Pilot Station (call sign Southampton Pilot) Channels 16 and 9 (Duty Pilot).

Tugs: When berthing vessels: Channels 8 or 10.

Esso Petroleum Terminal, Fawley: Channels 16, 14 and 19.

B.P. Oil Ltd., Hamble. Channels 16 and 14.

A patrol launch (Harbour Master flag by day, all-round blue light by night) is controlled by the Duty Operations Officer Southampton for pollution detection and keeping channels clear of pleasure craft for the passage of large vessels.

Vessels *(a)* drawing more than 10.5 m. *(b)* more than 288 m. in length or *(c)* of more than 100,000 d.w.t. exhibit a large black cylinder by day and 3 vertical red lights by night. Vessels showing these signals are not to be passed or overtaken within channel limits between the "West Bramble" and "Hook" light buoys, these vessels are considered to be constrained by their draft or restricted in their ability to manoeuvre and may not be able to comply with the Collision Regulations at other times. Will indicate inability by 5 short blasts on the whistle. "Clear channel" control is exercised by the Duty Operations Officer at Port Signal and Radar Station, 37 berth, Southampton Docks. The Thorn Channel has a limiting depth of 12.6 m. (April 1976) at low water datum.

Up to 7 vessels of under 91.4 m. in length are permitted to anchor out of the channel to the East of the "Hook" Buoy in the designated Small Ships Anchorage, the limits of which must be strictly observed. Three numbered anchor berths are available in an emergency for vessels not exceeding 168 m. in length in Fawley Reach, where vessels must moor to 2 anchors. Permission to use the Small Ships and numbered Anchorages must be obtained from the Duty Operations Officer, Southampton Port Radio.

MAX. SIZE: The largest passenger and container vessels call regularly at Southampton. Tankers: Fawley can accept partly loaded VLCC's up to 14.9 m. draft.

HEALTH: See "Health-all ports" before first UK Port.

TUGS: 2 tugs are permanently stationed at Fawley; if more than 2 tugs are required it should be noted that week-end requirements have to be advised to the tug operators not later than 1800 hrs. on Friday of each week.

If a vessel required more than 2 tugs and is due to arrive at Fawley between 0001 hrs. Saturday and 0900 hrs. Monday, ETAs must be submitted well in advance of 1600 hrs. on the Friday prior to arrival. It is usual to use the wires provided by the tugs for towing.

BERTHING: The Pilot boarding the ship at the Sea Station or anchorage will also berth the ship. Non-compulsory vessels can obtain or disembark a Pilot in the vicinity of the "N.W. Netley" or "Hook" buoys by contacting "Southampton Pilot" on VHF.

Dock or Quay	*Berths Nos.*	*Nominal Dredged Depth * below Chart Datum †*		*Length of Quays*	
		m.	ft.	m.	ft.
Container Berths	204-5-6	12.8	42	930	3050
Cable ship Berth	203	9.1	30	274	900
Container Berths	202	12.2	40	274	900
	201	10.2	33.5	304	1000
Western Docks	101-109 & Cross berth	11.7	38.5	2359	7741
	110	10.2	33.5	83	273
Ocean Dock (entrance 121.9 m., 400 ft. wide)	42-43-44	11.7	38.5	486	1595
	45	11.7	38.5	189	620
	46-47	11.7	38.5	485	1592
Test Quays	51	—	—	205	673
	50	4.1	13.5	147	485
	48-49	7.2	23.5	226	743
	41	8.7	28.5	172	565
	40	9.3	30.5	192	630
	38-39	10.5	34.5	316	1038
Dock Head	37	7.8	25.5	143	470
Empress Dock (entrance 48.5 m., 159 ft. wide)	20-21	7.5	24.5	258	848
	22-23	6.9	22.5	234	770
	24-27	7.2	23.5	502	1647
Itchen Quays	28	2.0	6.5	213	700
	29	5.6	18.5	106	350
	30-33	9.6	31.5	428	1406
	34-36	9.9	32.5	484	1590
Princess Alexandra Dock (entrance 99.1 m., 325 ft. wide)	2S-3-4	6.2	20.5	275	903
	1-2N-6-7-8-9	5.0	16.5	536	1760
Town Quay	61-62	2.6	8.5	152	500
	63-65	5.3	17.5	214	705
	66	6.6	21.5	103	340
	67	5.0	16.5	103	340
	68-69	5.3	17.5	213	700

Other berths are available. Lesser draft berths not shown. The depths of water are maintained as far as practicable, but are subject to variation and are not guaranteed.

* To find the depth of water in the berths add the tidal rise to the depths shown in the above table.

† Chart datum is approximately the lowest low water level.

TANKERS: Esso Marine Terminal, Fawley. There are 9 berths at Fawley, all running parallel to the main channel. The 5 berths on the outside of the jetty facing the main channel are for ocean-going vessels, No. 1 berth being the most Northerly. The 4 berths on inside of jetty are for small coastal craft. No. 6 berth being the most Northerly.

The following LWD depths are dredged and subject to alteration:

	Alongside	*Approaches*	*Distance between Centres*
Berth No. 1	33.5 ft.	33.5 ft.	800 ft.
,, No. 2	37.5 ft.	35.5 ft.	800 ft.
,, No. 3	41.5 ft.	45.0 ft.	800 ft.
,, No. 4	49.0 ft.	45.0 ft.	800 ft.
,, No. 5	49.0 ft.	45.0 ft.	1,000 ft.
,, Nos. 6-9	18.5 ft.	18.5 ft.	400 ft.

Emergency quick-release swivel mooring hooks are used on the outside berths, where vessels moor with 2 head-and-stern-ropes, 3 breast-ropes at each end and 2 springs at each end.
Dredged channel for Berths No. 6-9 is 375 ft. wide.

Shore gangways are available on Berths 4 and 5 for vessels of 47,000 d.w.t. and over.

Dirty Ballast Facilities: Dirty ballast facilities on all berths with maximum storage of 14,000 tons.

Crew members are not allowed to walk through the Refinery. Transport is provided to Fawley Village and to Southampton at intervals during the day. There are no shopping facilities at the Terminal, although cigarettes are available from slot machines at the Marine Terminal Building. GPO call boxes (coin telephones) are placed on the jetty.

B.P. Terminal, Hamble. Situated immediately opposite Fawley; has two main berths on the outside faces and a small coastal berth (No. 3) on the inner face of No. 2 berth. Berth No. 1 is the Northerly berth, and is used for larger vessels, having a depth of 31 ft. 6 in. below PLWD alongside and in the approaches. The berth face is 250 ft. long, so head or stern moorings are taken to 2 mooring buoys at the N.W. end of No. 1 berth. They are hook buoys; no lashings or mooring shackles are needed. No. 2 berth is similar in dimensions to No. 1 berth, the distance between centres being 530 ft. No. 3 berth is 250 ft. long, with 16 ft. 6 in. alongside at PLWD and 13 ft. in the approaches.

Facilities and services as for Fawley with the exception of transport no transport being available within the depot. Ship's personnel are allowed to walk through the installation to Hamble Village where public transport to Southampton is frequent.

All grades of fuel and diesel bunkers and fresh water available on all berths.

BUNKERS AND WATER: All grades of fuel oil and diesel oil are available and water is piped on all berths. Bunkers and stores can also be obtained by barge in Cowes Roads anchorage, but water is not readily obtainable there.

CONSULS:

Country	*Status*	*Address/Telephone No.*
Belgium	Consul	c/o W. Bates & Co. Ltd. Oxford House, College Street SO9 1LN Tel: 22766/7
Denmark	Vice-Consul	c/o Benjn, Ackerley & Son Ltd., Canute Chambers, Canute Road SO9 1FJ Tel: 27171
Dominican Republic	Consul	McGregor, Gow & Holland Ltd., Royal Mail House, Terminus Terrace SO9 3RB Tel: 23436
Finland	Vice-Consul	c/o Sandell Bros. Ltd., Latimer Street SO9 4TJ Tel: 30966
Germany (Federal Republic)	Consul	c/o Wainwright Bros. Bowling Green House, 1 Orchard Place SO1 1BR Tel: 23671
Greece	Vice-Consul	1 Paget St. SO9 4TH Tel: 27971
Italy	Consular Agent	c/o Herbert Ferryman Ltd., Galen House, Priory Road SO9 7AS Tel: 555641
Netherlands	Consul	c/o PHs Van Ommeren (London) Ltd., 150 High Street SO9 4DN Tel: 29051
Norway	Consul	c/o G. Haswell & Co. Ltd., 28 Queen's Terrace SO9 2UJ Tel: 23555
Philippines	Consul	Mann & Son (London) Ltd., No. 201 Berth Offices, Container Port, SO1 0HH Tel: 772416
Spain	Consul-General	Richmond House, (First Floor) Terminus Terrace, College Street SO1 1EJ Tel: 29510
Sweden	Vice-Consul	c/o Thos. Meadows & Co. Ltd., Royal Mail House, Terminus Terrace, SO9 4RB Tel: 25033

REPAIRS: All ship repairs can be effected. Largest dry-dock is 1,200 ft. long overall, 135 ft. wide and has 34 ft. over the blocks. Three smaller dry docks are maintained within the Port.

OIL POLLUTION: Southampton Water is an international yachting centre and has many holiday beaches on its shores. Consequently, oil pollution is treated very severely and heavy fines are imposed on offenders.

The Esso Refinery operates a clean-up service, the full economic cost of which is billed to the offending ship.

MEDICAL: Doctors and hospital facilities available. Agent should be advised in advance of any medical attention required.

An organisation exists for hospitalisation of sick seamen from vessels off Cowes, Isle of Wight. Arrange through Nitronradio, Nab, Needles or Southampton pilot or through vessel's Agent. Minimum delay to vessel.

CUSTOMS ALLOWANCE: By statute, crews of vessels in port are allowed 25 cigarettes per day per man. 0.3 litres (0.5 pint) of spirits and 1 bottle of table wine per day per man.

DEVELOPMENTS: A new container berth, 206 berth, is under construction and an additional link-span for Ro/Ro traffic is almost completed at berth 30/1. Transit sheds on the Itchen Quays are being demolished to provide parking spaces for this traffic. A new high-level road bridge is well advanced; it will replace the old Itchen chain ferry.

TIME: British Standard Time is GMT plus 1 hour, reverting to GMT in Winter months.

HOLIDAYS: Good Friday (variable date); Easter Monday (variable date); Spring Bank Holiday (variable date); Autumn Bank Holiday (variable date); Christmas Day (25th December); Boxing Day (26th December); New Year's Day (1st January).

POLICE/AMBULANCE/FIRE: Dial 999 from any telephone and ask for service required.

AUTHORITY: British Transport Docks Board.

AGENT: Keller Bryant & Co., Ltd., Havelock Chambers, 21/22 Queen's Terrace, Southampton. Telephone: (0703) 28566/7/8/9. Telex: 47568, Cables: Keller Southampton. After hours: Telephones: (0703) 734055, (0703) 733270, (0703) 25585.

STORNOWAY: 58.12 N. 06.22 W. (See Plan Book)

PORT LIMITS: Now extended to a line from Southern end of Holm Island on the East to Rugh A'Bhaigh Vaine on the West – approximately 7.5 cables to seaward of Arnish Point Light.

PILOTAGE: Pilotage not compulsory. Vessels requesting Pilot request same with ETA. Boarding off Arnish Point lighthouse.

ANCHORAGES: Anchorage in harbour between Goat Island and mouth of Creed River, 8 fathoms.

RESTRICTIONS: Entry night or day and at any state of tide. No bar on entrance.

MAX. SIZE: 400 ft. by 60 ft. by 22 ft. draft to berth alongside, 600 ft. length by 35 ft. draft for anchorage in bay.

HEALTH: The customary flying of "Q" flag.

Also see "Health – All Ports" before first U.K. port.

RADIO: Wick Radio or alternatively Oban Radio.

RADAR/VHF: R/T-VHF established in harbour, Channels 16 and 12. Emergency messages may be passed through Stornoway Coastguard on 81.8 m.

TUGS: No tugs available at port. Fishing vessels have been used, when necessary, for this purpose.

BERTHING: Vessels can be berthed at any time, provided berth is free.

Roll-on/roll-off ferry terminal for Stornoway/Ullapool service in operation.

Depth of water at low water spring tides: West side No. 1 pier: 24.5 ft. shallowing to 12 ft. at junction of North Beach Quay. East side No.1 pier: 24.5 ft. shallowing to zero at inward end. West side No. 2 pier: 17.5 shallowing to zero at inward end. East side No. 2 pier: 16.5 ft. shallowing to zero at inward end. Inner Harbour decreases from 12 ft. at junction of Esplanade Quay to 8 ft. at upper end of Cromwell Street Quay.

STEVEDORES: Arranged by Agents on receipt of ETA.

MEDICAL: Advance notice desirable, Hospital facilities available in the town.

TANKERS: Normal safety requirements. One tanker berth only 15 ft. mean draft, max. length 220 ft.

DENSITY: Pratically always dead salt; 1025 density.

FRESH WATER: Fresh water available by hose at 15 t.p.h.

FUEL: 24 hours notice required.

GANGWAY/DECK WATCHMEN: Service of watchmen not necessary. Watchmen from shore may be employed if required.

OPENING/CLOSING HATCHES: Normally crew.

IDENTIFICATION CARDS: Not required.

CONSULS: French, Swedish, Norwegian; tel. Stornoway 2012, 2054, 3173 respectively.

REPAIRS: Minor deck and engine repairs can be carried out locally.

DRY DOCKS: No dry dock but one slipway of 750 tons displacement.

REPATRIATION: Facilities exist for this service.

AIRPORT: 3 miles from port, served regularly by BEA from Glasgow, Aberdeen and Inverness.

HOLIDAYS: New Year's Day, Christmas Day and all other local Bank Holidays. Cargo work can be arranged except New Year's Day. (No Sunday work.)

POLICE/AMBULANCE/FIRE: Police, Stornoway 2222 (can deal with all three).

TELEPHONES: Can be arranged by prior application through Aberdeen office.

GENERAL: ETA to be sent 24 hours beforehand so that necessary arrangements can be made.

AUTHORITY: Stornoway Pier and Harbour Commission.

STRANRAER: 54.55 N. 05.02 W. (See Plan Book)

DOCUMENTS: As for other British ports.

PILOTAGE: Not compulsory – no Pilot available.

MAX. SIZE: Largest vessel handled 375 ft. long. Working draft 12 ft. 6 in.

HEALTH: See "Health – all ports" before first UK port.

BERTHING: 3 berths dredged to 14 ft. One with vehicular ramp. Deep water anchorage at Lady Bay.

CARGO GEAR: Portable crane of 10 tons capacity.

TUGS: Not available.

RADIO: VHF watch kept on Channel 16 at Ferry Terminal.
MEDICAL: Hospital in town.
FRESH WATER: Available at Railway Pier.
FUEL OIL: Limited quantities of fuel can be supplied from road tankers.
REPAIRS: Small repairs can be carried out by local engineering firm.
GENERAL: Inshore lifeboat at Stranraer.
DEVELOPMENTS: *New developments at Stranraer:* (Under control of British Rail Shipping and Port Manager) B.R.B. are carrying out the following developments at Stranraer:

1. Area of approx. 5/6 acres to be reclaimed and infilled for use as heavy commercial vehicle marshalling area.
2. Construction of a jetty of approx. 500 ft. in length.
3. Construction of double decked vehicular ramps and linkspans at this new berth.
4. Area at new berth and swinging area off new berth and East Pier being dredged to minimum 5.0 m. at L.A.T.
5. Channel between Spit Buoy (Scaur Buoy) and new berth being dredged to minimum 5.0 m. at L.A.T.

New developments to be completed by January 1979.
AUTHORITY: Stranraer East Pier is controlled by the British Rail Shipping and Port Manager.

Stranraer West Pier is controlled by the Regional Council Harbour Master.

SULLOM VOE: 60.27 N., 01.17 W. (See Plan Book)

GENERAL: The Sullom Voe Terminal is a loading terminal designed to process and export crude oil from the North Sea.

The Terminal, one of the largest in Europe, is initially designed to accept tankers up to 366 m. long with a draft up to 23.8 m. A loading facility for liquefied petroleum gas (LPG) carriers is scheduled to open in 1980.

The Terminal is situated on Calback Ness (60° 27.5′ N., 01° 17′ W.), within Sullom Voe at the S.E. extremity of Yell Sound. Here the processing and storage facilities are located adjacent to the loading berths. The Port Administration and Pilotage Offices are situated on the Eastern shore of the Voe at Sella Ness. From this administration centre, constant monitoring and surveillance of all Port operations will be undertaken.

There are 2 entrances to Yell Sound. The primary route, suitable for large and/or deep drafted vessels lies on the Western side of the Sound, extending from the Northern entrance South between the island of Lamba and the Ness of Queyfirth. Ships which require the use of this channel should approach from the North and rendezvous with the pilot boat at the Northern boarding area.

The S.E. approach is considered suitable for smaller vessels including coastal traffic. Prior to arrival, vessels should advise which approach they intend to use.

Both routes join at the entrance to Sullom Voe, the lead into the Voe is indicated by leading markers located on Fugla Ness. In the case of vessels other than coastal traffic, all manoeuvres South of Lamba Isle will be assisted by tugs.

Ships will generally be berthed starboard side alongside the oil loading berths. This will involve a 180° swing within the Voe in an area indicated by turning lights located on Sella Ness and Scatsta Ness. Vessels may berth port side alongside during adverse wind directions and when departure draft permits.

The turning area has a diameter of 800 m., and allows a LAT depth of 15 m. For the purpose of manoeuvring within the pilotage district, a minimum keel clearance of 2.1 m. is required.

Although current rates of up to 6 knots may be experienced in areas of Yell Sound, records indicate that the maximum current likely to be experienced within Sullom Voe and on the deep draft route is unlikely to exceed 1 knot. The tidal range within the Harbour Area is 2.3 m. at springs and 0.6 m. at neaps, the main tidal current flows to the South on flood tides and to the North on ebb tides.

Strong winds are frequently experienced at Sullom Voe and may be accompanied by sudden strong gusts from any direction. The prevailing wind direction is S.W.

It is essential that whilst alongside the jetty, moorings are tended carefully and regularly and conform with the recommended mooring patterns.

MINIMUM REQUIREMENTS: In the interest of avoiding delays, all vessels programmed for Sullom Voe should comply with the following minima and be fitted with:—

(i) Fully operational radar.
(ii) Fully operational VHF radio with Channels 16, 14, 20 12, 10, and 9.
(iii) Sufficient crew to handle tugs' lines and moorings efficiently.
(iv) Efficient propulsion and deck machinery.
(v) Efficient and adequate moorings to secure vessel's safety.
(vi) Efficient signalling equipment.
(vii) Fully operational tachometer, rudder and helm indicators.
(viii) Efficient mooring stations communications systems.
(ix) An efficient anchor windlass and anchors.

If any of the above requirements cannot be complied with, Sullom Voe Port Control should be advised prior to arrival.
DOCUMENTS:

General Declaration (C13). In duplicate.
Ship Stores Declaration (C14). In triplicate.
Crew Declaration (C142). In duplicate.
Small Parcels List (C143). Single copy (if appropriate).
Self-Declaration Deck Cargo (DC1). In duplicate (if appropriate).

When the vessel is not boarded on arrival the Master must arrange for 1 copy of each form to be lodged within 3 hours of arrival at the Custom Office, located in the Port Administration Building at Sella Ness.

PILOTAGE: Pilotage is compulsory within the Sullom Voe Shetland Pilotage District. Masters of British registered vessels of less than 1,600 g.r.t. will be eligible to sit an examination to gain a Pilotage Exemption Certificate.

Vessels of less than 300 g.r.t. are exempt from compulsory pilotage under the conditions laid down in Section 12 of the Sullom Voe Pilotage Byelaws.

The district is considered to include all waters contained within an area bounded in the North by a line drawn from the Point of Fethaland to Fogla Lee, and in the S.E. by a line drawn from the Northern extremity of the Ness of Sound to the Northern extremity of Uynaray Island and thence to Mio Ness.

Pilots are available on a 24-hour basis. A continuous VHF watch is maintained on Channel 9, 10, 12, 14, 16 and 20. Call sign "Sullom Voe Harbour Radio".

Pilot Boarding Areas: There are 2 pilot boarding areas located in Yell Sound. Vessels which require to use the main access route should rendezvous with the Pilot at the Northern entrance in a position 080°×1.6′ from the Point of Fethaland light and for vessels intending to use the S.E. Channel off the entrance to Tofts Voe.

Pilot Boats: The Authority will have 2 boats stationed for use at the Port of Sullom Voe.

(i) "Sullom Mareel" LOA 53 ft., service speed 16 knots. (In service.)
(ii) "Sullom Spindrift" LOA 65 ft., service speed 22 knots. (To enter service February, 1979).

The main construction of both boats is of G.R.P. They are fully equipped with modern navigational aids.

The freeboard of each boat is approximately 5 ft.

Pilot Boarding Arrangements: Pilots will normally meet and embark incoming vessels at the pilot boarding areas.

Masters are reminded that high sea conditions are frequently encountered in these areas and they should make every reasonable effort to provide a safe lee.

Pilot Ladder Requirements: All vessels calling at the Port of Sullom Voe must comply with "The Merchant Shipping (Pilot Ladders) Rules 1965" (S.I. 1046).

The following points are stressed:

(i) The rigging of pilot ladders and the embarkation and disembarkation of Pilots thereby shall be supervised by a responsible officer of the ship.
(ii) Every pilot ladder shall be secured in a position clear of any possible discharges from the ship, and so that each step rests firmly against the ship's side.
(iii) Every pilot ladder shall be secured in a position where the Pilot can gain convenient access to the ship after climbing not less than 5 ft. and not more than 30 ft.
(iv) Whenever the distance from the water to the point of access to the ship exceeds 30 ft., access from the pilot ladder to the ship shall be by means of an accommodation ladder or equally safe and convenient means.
(v) A light shall be provided at night so that the pilot ladder overside and also the position where the Pilot boards the ship shall be adequately lit.

Pilot Hoists: When a pilot hoist is provided as the method of access, it must be of an "approved" type.

An approved pilot hoist is considered to be one which complies with the recommendations of the "European Maritime Pilots Association".

A copy of these recommendations is available for inspection at the Port Administration Building.

ANCHORAGE: There are no suitable anchorages available to vessels arriving off the port of Sullom Voe. Where Masters are advised that a berth will not be available on arrival it is recommended that after arriving at a position within a radius of 6 miles from Gruney Island (60° 39′ 00″ N., 01° 18′ 00″ W.) from which their notice of readiness should be tendered, they should then stand off the coastline at a distance compatible with prevailing weather conditions, maintaining continuous listening watch on Channel 16 for further instructions from the port control.

Where a berth is available Pilots will as far as possible board ships on arrival.

When proceeding within the pilotage district, all vessels should have both anchors cleared and ready for letting go.

MAX. SIZE: See "Berthing" and "Loading/Discharging Facilities". Berth No. 2 is in operation. Berth No. 1 will be in operation March 1979.

HEALTH: With effect from April 1978, the new procedure for health clearance of ships applies at the Sullom Voe Terminal.

The Master has no need to obtain health clearance unless:

(i) An authorised officer otherwise directs.
(ii) The occurrence on board of death or illness as laid down in the Public Health (Ships) (Scotland) Regulations.
(iii) Any occurrence of abnormal mortality among rats or mice on board.

A proportion of ships will be boarded and checked.

Where it is necessary to obtain "Free Pratique" for health purposes, the Master should complete the following documents:

(i) Maritime Declaration of Health.
(ii) A list of passengers and crew leaving the ship together with the addresses they are going to in the United Kingdom.

Deratting Exemption Certificates: The Sullom Voe Terminal is an "approved" Port and Deratting Exemption Certificates will be issued by the local health authority.

Also see "Health – All Ports" before first UK port.

RADIO:

ETA Requirements: Vessels arriving at Sullom Voe are required to provide the Pilotage Authority with the following estimated times of arrival:

(i) At least 24 hours prior to arrival or on leaving the last port, whichever is later.
(ii) Confirm the vessel's ETA at least 6 hours before arrival at the seaward limit of the Harbour Area and thereafter notify of any significant change in excess of 1 hour.
(iii) On coming within VHF range of "Sullom Voe Port Control" establish VHF contact for the purpose of updating the ETA.

Pre-Arrival Information: Prior to arrival, all vessels calling at Sullom Voe should provide "Sullom Voe Harbour Radio" with the following information:

(i) Name of vessel.
(ii) Port of Registry.
(iii) Name of Master.
(iv) Gross Tonnage.
(v) LOA.
(vi) Draft.
(vii) Whether to berth or transit.
(viii) Whether laden or ballasted.
(ix) Whether vessel is carrying segregated ballast.
(x) Location where segregated ballast was loaded.
(xi) Segregated ballast quantity.
(xii) Dirty ballast quantity.
(xiii) Which pilot station on arrival.
(xiv) Pilot boarding arrangements.
(xv) Number of crew.

VHF: All shipping movements within the district are monitored from a Port Control Room located in the Port Administration Building at Sella Ness.

The Port Control Room is manned on a 24-hour basis by Marine Officers who are licensed Pilots.

These Marine Officers, in their capacity as Control Room Officers, maintain a continuous VHF and radar watch. They provide advice to Masters and Pilots on all navigational aspects including weather forecasts within the area, direct shipping movements within the port and liaise with the Terminal facilities and emergency services.

The following VHF Channels are constantly monitored at the Port Control Room.

Channel 16	Calling and distress.
Channel 9	Pilotage berthing and unberthing.
Channel 10	Pilotage (port emergency, fire or oil pollution).
Channel 12	Pilotage (port control general).
Channel 14	Pilotage (radar assisted pilotage).
Channel 20	Pilotage (alternative port control general).

The call-sign for Sullom Voe Pilots is "Sullom Voe Port Control".

In addition to the foregoing *Sullom Voe Terminal* will constantly monitor Channels 19 and 46 over which pre-arrival information concerning loading procedures will be communicated.

Since the Terminal has no direct access to Channel 16, initial contact should be made on Channel 19 using call sign "Sullom Voe Terminal" or in the event of difficulties through "Sullom Voe Port Control" initially on Channel 16.

It is emphasised that Masters should try to contact the Terminal as soon as possible prior to arrival at the pilot boarding area so that loading information may be exchanged before commencing the inward passage through Yell Sound.

Control of Traffic: The Port Control Room directs the movements of all vessels within the pilotage district. Overtaking and passing is prohibited within an area bounded by a line joining Queyfirth Light and the Northern extremity of Lamba Island and a line joining Skaw Taing Light and the front leading light on Gluss Isle.

Reporting Positions: During the transit of Yell Sound, all vessels are required to report to the Port Control Room when passing the following positions:

"A"	122.5°×1.5′ from Gruney Island Lt	(60° 38.6′ N., 1° 15.3′ W.)
"B"	274°×0.5′ from Muckle Holm Lt	(60° 34.9′ N., 1° 16.9′ W.)
"C"	094°×0.4′ from Queyfirth Lt	(60° 31.5′ N., 1° 18.7′ W.)
"D"	270°×0.5′ from Skaw Taing	(60° 29.3′ N., 1° 16.7′ W.)
"X"	355°×1.25′ from Mossbank Lt	(60° 28.5′ N., 1° 10.7′ W.)

RADAR: Full radar coverage exists for Yell Sound and Sullom Voe.

The main scanner, located on the hill of Vats Houllands (60° 27′ 57″ N., 1° 17′ 28″ W.) is connected by microwave link to displays in the Port Control Room.

Port Control Officers maintain a continuous radar watch, the transit of each vessel is monitored and recorded and advice is available to vessels on request.

TUGS: At present a fleet of 4 harbour tugs provide a towing service for vessels at the Sullom Voe Terminal. These are stationed at the Sella Ness Tug Jetty adjacent to the Port Administration Building.

The fleet is operated by Shetland Towage Ltd.

Three tugs have been purpose-built for the Terminal:

"Stanechakker", "Swaabie", "Lyrie"

These twin-screw 3,800 h.p. vessels, named after Shetland seabirds, each having a bollard pull of 55 tons. They are also fully equipped as fire-fighting tugs and pollution control vessels.

Also seconded to this permanent fleet is a fourth tug:

"Flying Childers"

A single-screw tug of 2,904 h.p. with a bollard pull of 38 tons, but without fire-fighting capability. The use of tugs and their numbers will be at the discretion of the Pilot and Master. It should be noted that from the power of these tugs and the service for which they have been designed their towing equipment has been sized accordingly. Prior to arrival, vessels should therefore ensure that heaving lines to assist in securing the tugs are of adequate length and breaking strain, and are readily available.

Tugs will normally meet incoming vessels at a position North of Lamba Island. Officers and crew should be standing by to receive lines and all necessary tugs will be secured before the vessel's ability to manoeuvre becomes restricted.

Tugs may be positioned for use with towing lines or alongside with bow lines, their mode of operation and disposition will be fully explained by the Pilot on arrival. Tugs lines will normally be used throughout, either from towing hook or towing winch.

It is requested that wherever possible tug orders for movements before 0900 hrs. be placed before 1700 hrs. on the night before.

BERTHING:

Limiting Vessel Sizes:

No. 1	Crude Carriers	Length 140m. to 280 m.
	LPG Carriers	10,000 cu.m. to 75,000 cu.m.
No. 2	Crude Carriers	Length 210 m. to 355 m.
No. 3	Crude Carriers	Length 170 m. to 355 m.
No. 4	Crude Carriers	Length 170 m. to 355 m.

Loading Systems:

No. 1	Crude 4×12 in.	Loading arms var. hydraulic connections.
	LPG 3×12 in.	Loading arms var. hydraulic connections.
No. 2	Crude 4×16 in.	Loading arms var. hydraulic connections.
No. 3	Crude 4×16 in.	Loading arms var. hydraulic connections.
	+1×12 in.	Loading arm.
No. 4	Crude 4×16 in.	Loading arms var. hydraulic connections.

Manifold Heights:

	Heights above chart datum	
	Max.	*Min.*
No. 1 Crude	22.70 m.	1.80 m.
LPG	16.90 m.	3.50 m.
No. 2 Crude	31.30 m.	2.60 m.
No. 3 Crude (16 in. arms)	31.30 m.	4.23 m.
(12 in. arm)	19.90 m.	2.70 m.
No. 4 Crude	31.30 m.	4.23 m.

Maximum allowable pressure on lines and connections: 150 lbs/sq.in.

Jetty Orientation:

No. 1	280°/100°
No. 2	135°/315°
No. 3	135°/315°
No. 4	135°/315°

Design Depths Alongside Berths at Chart Datum:

No. 1	16.8 m.
No. 2	23.1 m.
No. 3	23.8 m.
No. 4	To be advised.

Gangway: Shore tower type gangways are provided at all berths.

Reducers: When required, reducers will be provided by the Terminal.

Maximum Loading Rate per Arm:

Crude: 12 in. loading arm..2,500 long t.p.h.
16 in. loading arm..5,200 long t.p.h.

LOADING/DISCHARGING FACILITIES:

Oil Loading Berths: One loading berth (berth No. 2) has been completed, a second berth (berth No. 1) is due to be completed in March 1979. A further 2 berths are under construction and are scheduled for commissioning in 1979.

The loading berths are located in deep water on the Northern shores of Sullom Voe, adjacent to the Terminal complex at Calback Ness.

The berths are numbered 1 to 4 in sequence from East to West. Number 1 jetty has facilities for crude and LPG carriers and can accommodate vessels up to 120,000 d.w.t. Numbers 2, 3 and 4 jetties have crude loading facilities only, catering for vessels up to 300,000 d.w.t.

Each jetty is of conventional "T" shaped construction with 4 breasting dolphins in line with the jetty head. The mooring dolphins are offset from the line of breasting dolphins to provide an optimum lead for mooring lines and to allow a vessel to land at a limited angle to the jetty face. Quick release mooring hooks are fitted on all dolphins. For use with large vessels, quick release mooring pulleys have been fitted on No. 2, 3 and 4 berths. These pulleys, one at each end of the berth are designed to accept a ship's mooring wire in the form of a bight.

Large flexible rubber fenders are fitted to the outer faces of each breasting dolphin. Due to their construction, the breasting dolphins have a limited ability for deflection and landing speeds will be controlled so that all energy will be absorbed by the rubber fendering.

As an aid to berthing each jetty is fitted with an "IDASAT" doppler system. This system provides the ship with advice on the lateral velocity of the vessel and the distance off from each outer breasting dolphin. This information is presented in the form of red, amber and green lights. Various permutations of these "traffic lights" indicate a vessel's safe approach speed. The landing of a vessel alongside the berth should be at a speed which is indicated by a single green light on the display for each end of the vessel.

The 2 lateral distance off indicators each comprise of 20 fibre optic bars. Each bar element is switched separately at specified distances, all bars being illuminated at 99 m. In addition to indicating distance off, this system provides an accurate indication of the vessel's angle of approach to the jetty face.

Each mooring operation will be assisted by two purpose-built mooring boats.

General Mooring Requirements:

(i) Masters should ensure that mooring lines are in good condition, winch brakes or securing devices should be in efficient operating order and should have a holding power of at least 60% of the breaking load of the vessel's mooring lines. (On vessels constructed before 1978 these conditions may be met by placing the winch in gear and applying power in addition to applying the brake).

(ii) Any known defects in the vessel's mooring system or limitation of mooring winch brakes should be reported to the Terminal on arrival in order that if necessary additional precautions may be agreed.

(iii) In order to avoid damage to loading arms and the serious consequences of oil pollution, the vessel should be kept close alongside at all times.

(iv) If the vessel is equipped with mixed moorings of wire and fibre ropes it is important that these should not be used together in the same direction and service. It is recommended that wires (or wires fitted with synthetic fibre rope tails of at least 25% greater breaking load to the wire), should be used for all spring mooring lines.

(v) Particular care should be taken to ensure sufficient transverse restraint from breast line moorings. When synthetic fibre mooring lines are used, pre-tensioning of these lines on making fast will help prevent drift of the vessel away from the berth in "off the berth" wind conditions.

(vi) As soon as the vessel is secured, brakes on all mooring winches should be firmly applied. Winches must not be left on automatic tensioning. Full steam pressure or power to all mooring winches should be maintained available at all times when alongside. On split drum mooring winches only one layer of rope shall be permitted on the working half of the drum.

(vii) An efficient watch must be maintained on the vessel's moorings at all times to ensure that all lines are properly tensioned and tended when required. The deck watch should include regular checks that mooring winch brakes are applied at the correct setting.

(viii) Masters should endeavour to ensure compliance with the mooring layout as advised by the Pilot and Mooring Master. Large vessels should also use the "pulley" mooring hooks in the manner advised.

Connection of Loading Arms: The connection of oil loading arms will be undertaken by shore personnel.

Masters should ensure that fire extinguishers are stationed ready for use at the ship's manifold, in accordance with jetty regulations.

Crude Oil Storage: 15 conventional floating roof storage tanks are being constructed, each with a capacity of 600,000 barrels. These provide storage facilities in the event of port closures and ensure sufficient stocks to enable tankers to load without delay.

The storage tanks have been constructed with bases as much as 30 m. above sea level, initially, loading will be undertaken by gravity. Six oil loading pumps have been installed and will be operated as throughput increases.

Loading Rates: A maximum loading rate of 30,000 t.p.h. can be provided by the Terminal with a maximum of 20,000 t.p.h. to any one berth.

The LPG loading system will deliver up to 3,000 cu.m. per hour.

Cargo Measurement: Meters will be installed for cargo measurement.

Early Departure Procedure: An early departure procedure will be operated at the Sullom Voe Terminal.

DRY CARGO FACILITIES:

Construction jetty: A concrete pier suitable for coastal traffic is located in Garths Voe, East of No. 1 jetty.

This pier, orientated on a 108°/288° axis is 100 m. long and can accept ships on both the inside and outside faces.

The inner berth is equipped with a fixed Ro/Ro ramp. This ramp has a width of 10.7 m., a total length of 23.7 m. and a fixed gradient of 1:22. The height of the sill is 1.67 m. above MHWS.

The pier is well fendered with patent fenders and tyres. The depths off the pier range from 9.9 m. at the Eastern extremity, rising to 3.9 m. at the Ro/Ro ramp.

The dock labour force is operated by Wimpey Marine Ltd., who have offices adjacent to the pier. Normal working hours for the dock labour force are from 0800 hrs. to 2200 hrs. The stevedoring offices are manned on a 24-hour basis.

Graven Pier: A small concrete fishing pier is situated on the Southern shore of Garths Voe. This pier requires considerable repair and is unsafe for berthing any vessels. Craft using this pier do so entirely at their own risk. The approximate depth of water at the jetty is 2 m.

Tug jetty: Harbour tugs and pilot boats are stationed at an "L" shaped jetty located on the Southern shore of Garths Voe adjacent to Sella Ness. This jetty, of cellular design is constructed of concrete and steel.

Fendering arrangements consist of pneumatic fenders positioned at intervals along the jetty face. This pier is suitable for coastal traffic but is not used as such on a regular basis, except for discharge of fuel oils to the Graven storage facilities.

The present minimum depth off the N.E. arm of the jetty is approximately 6.9 m.

BALLAST:

Ballast Requirements: For the purpose of safe manouevring, the Pilots require all vessels to maintain a reasonable ballasted condition.

Vessels should carry sufficient ballast so that the propellor remains immersed whilst maintaining a reasonable stern trim.

Ballast Reception Facilities: It is prohibited to discharge any ballast other than segregated clean ballast into the waters of Sullom Voe.

All dirty ballast or non-segregated ballast will be discharged ashore for treatment.

The Terminal can accept ballast whilst providing the vessel with cargo. Ballast will initially be pumped into settling tanks where excess oil will be skimmed off into recovered oil tanks. The remaining ballast will undergo further treatment before being discharged into Yell Sound. The ballast water will be monitored throughout the cleaning process.

In the initial stages of the Terminal operations ballast reception facilities will not be available and ships will therefore be required to retain their ballast contained in cargo tanks on board.

Discharge of Ballast Water: The discharge of ballast water from oil cargo tanks or any ballast water containing quantities of oil into the waters of the harbour is prohibited.

The discharge of ballast water from segregated or permanent ballast tanks into the waters of the harbour will be permitted provided that:–

1. The Master of the vessel advises the Harbour Authority prior to arrival:
   (a) The place at which the ballast was taken.
   (b) The quantity and disposition of the ballast.
   (c) That to his knowledge the ballast is free from oil contamination.
2. The Master of the vessel advises the Harbour Authority:
   (a) On each occasion he intends to discharge the ballast and at least 30 minutes before
      (i) The time at which he intends to commence deballasting, and
      (ii) The time at which he expects to complete deballasting.

The Oil Pollution Control/Safety Officer of the Harbour Authority will on occasions board vessels carrying segregated ballast to obtain samples of such ballast. Analysis will be made of these samples to ascertain the quantity of hydrocarbon, colliforms and heavy metal pollutants within the ballast. The Harbour Authority may, as a result of information so gleaned, refuse permission for the discharge of segregated ballast water taken on board in certain locations.

MEDICAL: Medical attention for ship's crews if required will normally be provided by the Port Medical Officer and arranged by the ship's Agent.

However, in the event of an emergency and the Port Medical Officer being detained elsewhere, medical attention will be available from the Terminal medical centre.

FUEL: At present there are no bunkering facilities available for vessels calling at the Sullom Voe Terminal.

FRESH WATER: Potable water is only available to vessels on an emergency basis.

CUSTOMS: A selective system of boarding commercial vessels arriving from a non-U.K. port, will apply at the Sullom Voe Terminal.

CONSULS: In Lerwick.

Denmark	(C. W. L. Aitken)	106a Commercial St.	Lerwick 3057
Finland	(F. Garriock)	106a Commercial St.	Lerwick 3057
France	(F. Garriock)	106a Commercial St.	Lerwick 3057
Germany	(M. M. Shearer)	Garthspool	Lerwick 2556
Netherlands	(A. G. Beattie)	106a Commercial St.	Lerwick 3057
Norway	(F. Garriock)	106a Commercial St.	Lerwick 3057
Sweden	(M. M. Shearer)	Garthspool	Lerwick 2556

REPAIRS: Limited engineering repair facilities are available from Lerwick.

Electronic Navigational Aids and Radio: All major companies have agencies in Shetland. Repair facilities exist for all types of electronic equipment.

Engine Readiness: Main engines must be maintained in a state of readiness for vacating the Terminal at short notice at all times except in the cases of approved repair work as detailed in Regulation 14 of "Jetty Safety Regulations".

REPATRIATION: Crew changes will be arranged by Agents.

AIRPORT: Shetland's main airport "Sumburgh" is located at the Southern extremity of the mainland.

Scheduled flights are available to major Scottish airports.

GENERAL:

The following services can be provided for vessels by the Shipping Agencies. Masters are requested to provide notice of requirements prior to arrival.

Divers: Well equipped, deep sea divers are available on request.

Compass Adjustments: There is no facility for adjusting compasses at the Sullom Voe Terminal. A service is available for smaller vessels at Lerwick.

Storing: A wide range of dry provisions is available locally; however, major storings from mainland suppliers is not recommended because of possible disruption to transportation during periods of adverse weather conditions.

Bonded Stores: Bonded goods are available from Lerwick. Advance notice is requested.

Lubricating Oils: BP, Shell, Esso and Castrol have authorised dealers in Shetland. Lubricating oils are available in drums.

Sea Travel: P&O Ferries maintain a regular Ro-Ro and Passenger ferry service from Lerwick to Aberdeen.

Provisioning: Vehicles are prohibited access to the oil jetties. Trolleys are provided at each berth to assist with the transportation of ship's stores.

CHARTS AND PUBLICATIONS:

Charts:

British

BA. 3297	Sullom Voe
BA. 3298	Yell Sound
BA. 1118a	Shetland Isles (Sheet 1)
BA. 3059	Moul of Eswick to Fetlar

Pilot Books: North Coast of Scotland Pilot N.P. 52.

Tidal Stream Atlas: Orkney and Shetland Islands N.P. 209.

Lights: Admiralty List of Lights, Volume A.

Additional Charts and Publications relevant to Sullom Voe may be published in the near future.

DEVELOPMENTS: Extensive developments continue at Sullom Voe.

SAFETY: *Smoking:* Smoking is prohibited on vessels during loading operations. Except in 2 or at most 3 smoking rooms allocated by the Master and approved by the Terminal Representative.

Matches and lighters shall not be carried by personnel outside the approved smoking areas, or on the jetties.

Fire Precautions: Vessel's fire-fighting appliances, including main and emergency fire pumps shall be kept ready for immediate use.

Before deballasting and loading/discharging operations commence and during periods when permitted repair work is being carried out, fire hoses shall be uncoiled and connected to the fire main with at least one fire pump maintaining pressure on the main.

Jetty Fire-Fighting Facilities: The oil loading jetties are each equipped with 2 independent hose supply systems, one for fire water alone and the second for either fire water or foam mixture.

These systems supply hydrants which are spaced out along the jetty access road and jetty head.

Monitors are installed to provide a water curtain in the area of the jetty head and between the access tower and manifold area. Elevated monitors are also positioned at the top of the access and monitor towers. A sprinkler system protects the access tower.

Hose couplings are 2.5 in. standard instantaneous female type and the fire main to the access tower has provision to accept international connections.

The working pressure of the fire system is 250-260 p.s.i. A pump-in point is situated on the construction jetty to allow fire-fighting tugs to link into the system.

POLLUTION: It will be appreciated that oil spillages are seriously viewed by Government, Local Authorites, Port Authorities and Terminal Operators. Spillages will be investigated by the appropriate authorities and the Master and/or Owner may be liable to prosecution. Delay to the vessel could well arise.

Masters are therefore requested to ensure that every precaution is taken to prevent oil spillages at the Sullom Voe Terminal.

EMERGENCY SERVICES AND PROCEDURES:

Fire	Phone Sullom Voe 2797 VHF Channel 10
Oil Pollution	Phone Sullom Voe 2797 VHF Channel 10
Ambulance	Phone Sullom Voe 2797 VHF Channel 10
Security	Phone Sullom Voe 2797 VHF Channel 10

All emergency services within the port are co-ordinated by the "Emergency Services Control" situated at the Terminal fire station.

On vessels arrival at the Terminal, the responsible ship's officer and the Loading Supervisor will discuss action to be taken in an emergency situation. The vessel will receive a copy of the "Jetty Safety Regulations", these should be studied and adhered to.

Safety inspections will be undertaken by the Loading Supervisor, throughout the vessel's period alongside. Spot checks will also be made by the Terminal emergency services department. The Harbour Authority will undertake safety and pollution inspections including launch patrols.

TELEPHONE NUMBERS: S.V.=Sullom Voe.

	Internal Telephone System	*External Lines*
Terminal Emergency Services	222	S.V. 2797
Fire	222	S.V. 2797
Ambulance	222	S.V. 2797
Oil Pollution	222	S.V. 2797
Terminal Security	222	S.V. 2797
Police		Lerwick 2110
Sullom Voe Coastguard		S.V. 2561
Lerwick Coastguard		Lerwick 2976
Terminal Control Centre (Shift Supervisor)		S.V. 2313
Port Control Room		S.V. 2494/2495/2551
Harbour Master		S.V. 2551 Ext 201
Oil Pollution Control/ Safety Officer		S.V. 2551 Ext 209
H.M. Customs & Excise		Lerwick 4040
H.M. Customs & Excise		S.V. 2571
H.M. Customs & Excise		S.V. Oil Terminal 2368

AUTHORITY: The Director of Ports and Harbours, Shetland Islands Council.

SUNDERLAND: 54.55 N. 01.21 W. (See Plan Book)

DOCUMENTS:

Crew List. 1 form I.B.6A to be delivered to an Immigration Officer within 24 hours of arrival.

Passenger Lists. Form P.R.4. in duplicate and Form P.R.10 in duplicate.

Customs Documents. Crew Declaration Form C.142 in duplicate.

Cargo Manifests, triplicate.

Ship's Papers:

Register.

Load Line certificate.

Safety Radio Certificate.

Safety Equipment Certificate.

Safety Construction Certificate.

De-ratisation Certificate.

Customs Light Bills.

PILOTAGE: Call Sunderland Harbour Radio, Channel 16, working Channel for port is 14. Pilotage not compulsory, but advisable for all but small vessels. Pilots maintaining continuous watch on VHF Sound signals for vessel requiring Pilot is Morse Code No. 6. Pilot boards 0.5 to 0.75 mile off piers. In bad weather pilot cutter leads vessel into inner harbour, and Pilot boards there.

ANCHORAGES: 0.5 to 0.75 miles N.E. of Roker Pier Lighthouse.

RESTRICTIONS: Vessels enter 2 hours before high-water for entry into South Dock. For Corporation Quay only restriction draft 8.38 m.

MAX. SIZE: South Dock – length 142 m. beam 18.9 m., draft 8.08 m. with Spring tides, 7.16 m. with neap tides.

River – length 183 m., beam – no restriction, draft 8.38 m. subject to siltage.

HEALTH: Pratique procedure: pratique granted by Port Health Authority on arrival.

Suspected disease or fever: all ships from suspected areas must radio Port Health Authority 24 hours in advance of arrival, stating general condition of crew members. Pratique is automatic when ships arrive from other U.K. ports.

Also see "Health – All Ports" before first U.K. port.

RADIO: Cullercoats.

TUGS: Join vessel at or outside harbour entrance. Ship's ropes normally used.

BERTHING: In South Dock vessel must arrive from 2 hours before up to a 0.5 hr. after high water. At Corporation Quay small vessels berth at any time. Large vessels usually berth at same time as mentioned for South Dock.

BRIDGES: In South Dock bridges operated at tide time 2 hours before to a 0.5 hr. after high water. Railway Bridge clearance, 25.1 m. MHWS.

STEVEDORES: The Port of Sunderland Authority carry out all stevedoring. Agents should advise as early as possible in order to arrange berthing and gangs, 5 to 6 days notice if possible. ETA from ship 2-3 days in advance. Working rates of principal commodities are;

Bagged cargoes	15	t.p.h.	
Sisal	20/25	,,	
Scrap – heavy	25	,,	
Chrome and heavy ores	40	,,	
Wood Pulp	30	,,	(loose bale)
Wood Pulp	80/90	,,	(unitised)
Limestone	325	,,	

MEDICAL: Well served with General practitioners and hospital facilities, and attention can be arranged at very short notice. However, unless urgent, 24 hours notice desirable.

TANKERS: 4 installations (lines either 0.16 or 0.2 m.) 3 installations in South Dock and 2 berths, the S.E oil berth 98 m., the S.W. oil berth 89 m. 1 vessel of maximum length 142 m. can use this berth, draft 8.08 m. Spring tides; 7.16 m. Neap tides. At Corporation Quay vessel 183 m. long, draft 8.58 m.

DENSITY: Salt water density 1025.

FRESH WATER: Available. Arrangements can be made to supply water at any time.

FUEL: Bunkers supplied at Corporation Quay pipe-line from Petrofina Ltd. All grades available – Corporation Quay and Hendon Dock. Viscosities range from 32 secs. to 3,500 secs., and can be blended to any requirement in this range. 12 hours notice necessary. Rate 250 t.p.h.

GANGWAY/DECK WATCHMEN: Services of watchmen recommended.

OPENING/CLOSING/HATCHES: This work is normally carried out by ship's crew, otherwise shore riggers.

CERTIFICATES:

Register.
Load Line Certificate.
Safety Radio Certificate.
Safety Equipment Certificate.
Safety Construction Certificate.
Deratisation Certificate.

CUSTOMS ALLOWANCE: As per H.M. Customs and Excise Regulations.

IDENTIFICATION CARDS: Not required. Must possess vaild Seaman's Book and/or Passport.

CONSULS:

Denmark	Tel. Sunderland	70811
Iceland	,, ,,	70811
Finland	,, ,,	72846
France	,, ,,	73694
Netherlands	,, ,,	75441
Norway	,, ,,	70101

REPAIRS: All repairs possible.

DRY DOCKS: One dry dock in use, length 109 m., breadth 14.6 m.

REPATRIATION: Facilities available for effecting repatriations, with good rail, road and air communications.

AIRPORT: Approximately 20 miles. Newcastle Airport served by regular airlines, all the year round, to all parts of the world. Also chartered flights by Britannia.

HOLIDAYS: Official Holidays for General Cargo ships: New Year's Day (no work except by special agreement); Good Friday; Easter Monday; May Day; Spring Bank Holiday; Summer Bank Holiday; Christmas Day (no work except by special agreement); Boxing Day (no work except by special agreement).

POLICE/AMBULANCE/FIRE: Police Station Tel. Sunderland 76155; Ambulance Control Tel. Sunderland 72875; Fire Station Tel. Sunderland 56456. Or call 999 from any telephone and ask for service required.

TELEPHONES: Permanent arrangements do not exist, but a temporary arrangement can be made at any time.

AUTHORITY: Port of Sunderland Authority.

SWANSEA: 51.37 N. 03.56 W. (See Plan Book)

DOCUMENTS:

Light Bill receipt.
Crew List.
Manifests.
Bill of Lading copies.
Customs and Health.

PILOTAGE: Request for Swansea Pilots by International Signal Code for Sea Pilots, by telephone call for Dock Pilots. Telegraphic address for Swansea Pilots is "Pilority, Swansea".

Advance notice of ETA required at least 12 hours. VHF Channels 16 and 6. Pilot boat has bright yellow hull with red boot-topping; superstructure painted white. Pilot cutter's sound signal is SM, three shorts and two long blasts. The area of boarding is usually one mile S.E. of Mumbles Lighthouse in all weathers. Usual requirements for ladders are in force, and Pilots require ladder to be about four to five feet above water.

ANCHORAGE: About 1 mile S.E. of the Mumbles Lighthouse.

RESTRICTIONS: Berthing is in accordance with tide. King's Dock Lock operates for a min. of 8 hours each tide. River-side berths and Swansea Ferryport Terminal operate over a greater period.

No night-time restriction of entry.

MAX. SIZE: Max. size for entry is 655 ft. long, 86 ft. beam, 32 ft. 6 in. draft.

These vessels are docked over high water period. Any vessel whose dimensions are approaching max. for port should advise Docks Manager well in advance.

HEALTH: Usual international health regulations are to be observed. Any vessel which is suspect should inform Port Medical Officer of Health.

RADIO: All communications for ship movements through "Swansea Dock Radio" Channels 16 and 14 VHF. Agents, receivers, etc., can be called through usual coastal radio stations – this includes Ilfracombe Radio.

TUGS: Towage undertaken by private operators. The Alexandra Towing Co. Ltd., at present use a modern fleet of tugs at Swansea and Port Talbot. It is optional whose lines are used, but if tugs line is taken, an extra charge will be made.

BRIDGES: Two In dock bridges are under direction of duty Assistant Dock Master. A vessel which has to pass them will be informed by the Assistant Dock Master as to their availablity.

BERTHING: Normal depths of water:

Queen's Dock 35 ft.
King's Dock 33 ft.
Prince of Wales' Dock 24 ft. 6 in.

BULK HANDLING FACILITIES: *Petro Chemicals.* One jetty in Queen's Dock operated by BP Chemicals International Ltd.

Coal. Four coal hoists in the King's Dock, operated by the British Transport Docks Board.

Bulk Cargoes. (Sulphur, ores, etc.). Two berths in King's Dock equipped with five 7.5 ton and five 10-ton grabbing cranes. Operated by British Transport Docks Board.

Ferryport: On East bank of River Tawe, used by the B & I Line for its fast service between Swansea and Cork for passengers, cars and wheeled freight.

CRANES: Two 25 ton and nine 11.5 ton electric cranes. Five 7.5 ton, seventeen 6 ton and seventeen 3 ton.

STEVEDORES: Stevedoring services are provided wholly by British Transport Docks Board. Advice of labour requirements must be received by the following times:

General Cargo: By 0700 hrs. to start work at 0700 hrs. By 1030 hrs. to start work at 1130, 1400 or 2200 hrs. same day.

Coal Shipping: By 1530 hrs. for work at 0600 hrs. next day. By 1030 hrs. for work at 1400 hrs. same day.

MEDICAL: Port Medical Officer of Health has an office on King's Dock Lock. Medical attention can be obtained at short notice. In emergencies, the duty Assistant Dock Master can be communicated with, to obtain medical help. Hospital facilities available, and there is a first-class medical centre on the Prince of Wales Dock. Vaccination and fever certificates will be examined when receiving pratique.

TANKERS: All tankers arriving, working cargo, and departing are required to observe port's Petroleum By-laws and Oil in Navigable Waters Act. British Petroleum Company has further private directives for oil tankers. Five main tanker berths, one petrochemical berth, two coastal tanker berths and two layby berths in Queen's Dock. One tanker/general cargo berth in King's Dock. Deepest draft permitted is 32 ft. 6 in. A special fire-float to deal with tanker casualties is maintained in the Queen's Dock by the B.P. Company Ltd.

DENSITY: King's Dock Lock density is 1025.

FRESH WATER: Fresh water supplied from hydrants on quays by watermen. Rate of delivery is 2,000 g.p.h., approx., depending on the demand.

FUEL: Various grades of gas oil and diesel can be supplied by barge or road vehicles, or it can be delivered ex-pipeline at Queen's Dock.

FIRE PRECAUTIONS: All matches and lighters must be declared at entrance to oil installation. There are arrangements at the Queen's Dock depot for shore cooking and eating. There is an oil boom between the King's Dock and Queen's Dock to serve as an oil fire break between two docks. A 24 hours observation is kept at Scherzer Bridge for oil pollution and fires.

GANGWAY/DECK WATCHMEN: Under Port Regulations, there shall always be on board sufficient men to move or take care of the vessel. Some vessels employ watchmen. Cost is a tariff charge.

OPENING/CLOSING HATCHES: Normally done by the ship's crew, but if riggers are employed by vessel for general duties they open up hatches.

CERTIFICATES:

Certificate of Freeboard.
Certificate of Registry.
Certificate of Pratique.
Light Bill.
Manifest.
Bill of Health.
Bills of Lading.
AA (1) Certificate.

CUSTOMS ALLOWANCE: At discretion of local H.M. Customs inspectors.

IDENTIFICATION CARDS: Not compulsory, but they are helpful if a crew member has to identify himself to Authorities.

CONSULS:

France	tel. Swansea 55274	Norway	tel. Swansea 50564
Vice-Consuls:			
Belgium	tel. Swansea 50021	Netherlands	tel. Swansea 53921
Finland	,, ,, 53921	Portugal	,, ,, 57757
Greece	,, ,, 50957	Spain	,, ,, 25121
Italy	,, ,, 55146	Sweden	,, ,, 55146

REPAIRS: All types of deck and engine-room repairs are possible.

DRY DOCK: Two dry docks in port are entered from King's Dock. Dry docks: "Duke of Edinburgh" 670 ft. × 92 ft.; "Palmers" 560 ft. × 75 ft.

REPATRIATION: Mercantile Marine Office in Swansea where ship's crews are paid-off before Superintendent of Shipping. Necessary arrangements can be made for repatriation through the Consular Channels.

AIRPORT: Nearest airport at Swansea, 8 miles from Docks. Next are Rhoose (Cardiff) and Bristol airports where regular scheduled flights are handled.

TIME: Local time is British Standard Time which is plus 1 hour to Greenwich Time. Reverting to GMT during Winter months.

HOLIDAYS: Christmas (25th December); Boxing Day (26th December); New Year's Day; Easter, Good Friday and Monday (movable dates); Spring Holiday, Summer Bank Holiday (both movable dates). No cargo is worked on these days.

POLICE/AMBULANCE/FIRE: Call 999 from any telephone, and ask for service required.

TELEPHONES: Arrangements at most berths for placing telephones on board ships in port.

GENERAL: Entrance lock is 875 ft. in length, 90 ft. across at cope level. The inner sill is 7 ft. higher than the outer sill. The outer sill is 11.4 ft. below Admiralty Chart datum.

Tugs are available at the port for in-dock as well as sea towage.

A diver can usually be obtained by enquiry to the British Transport Docks Engineer, Swansea.

Docks Manager: Tel. 50855/200. Dock Engineer: Tel. 50855/275. Dock Master and Fire Officer: Tel. 50855/260.

AUTHORITY: The British Transport Docks Board.

TEES RIVER: 54.39 N. 01.08 W. (See Plan Book)

AUTHORITY: Tees and Hartlepool Port Authority.

PORT LIMITS: The Port facilities extend from the river entrance to the I.C.I. Billingham Oil Jetty 16 km. up river.

Arrival in the port is accepted as time of passing South Gare lighthouse inward, or time of anchoring in the Tees Bay.

DOCUMENTS: Ship's official papers including:
- Register.
- Load-line Certificate.
- Deratisation Certificate.
- Safety Equipment Certificate.
- Radio Safety Certificate.
- Construction Safety Certificate.
- U.K. Light Dues.
- Oil Pollution Certificate. (Tankers).
- Crew List.
- C14 Ship's Stores List.
- C13 Arrival General Declaration.
- C142 Crew Declaration.

PILOTAGE: The Tees pilotage district extends from a radius of 5.6 km. seawards of the South Gare lighthouse, as far up river as Victoria Bridge, Stockton, including Seaton Channel and is under the control of the Tees Pilotage Authority.

Official Address: Tees Pilotage Authority, 13-14 Bridge Street East, Middlesbrough, Cleveland TS2 1NS. Telephone: Middlesbrough 242924/5 (during office hours), Middlesbrough 590747 (after hours). Telegraphic Address: "Tees Pilots, Middlesbrough".

Pilot station is situated at South Gare and pilot cutter on duty is moored there. Cutters are painted blue with white upper structure and fly the pilot flag by day when on duty and International Regulation lights by night. The duty cutter is equipped with VHF Radio, call sign "Tees Pilots" on Channel 16. Radar is also fitted.

As much advance notice of a vessel's arrival as possible should be given to Pilots: minimum requirement for vessel arriving is 1 hour and for vessel sailing 1 hour 15 minutes.

Pilot boards in vicinity of Tees Fairway Buoy although smaller vessels are occasionally boarded off the South Gare lighthouse. During severe weather the duty cutter may move to Tees Dock and the Pilot will board as far seaward as the conditions permit.

Pilotage is not compulsory.

APPROACHES: Vessels are prohibited from anchoring:—
- (i) inside the dredged channel.
- (ii) within a radius of 1,113 m. of the Tees Fairway Buoy.
- (iii) within the limits of 2 divergent lines starting and extending from the dredged channel limits 244 m. apart at the South Gare light station, to 550 m. apart between their respective points of intersection with the circumference of the circle defined in (ii).

Small vessels can anchor close N.E. of No. 4 Light Buoy: larger vessels at Fairway Buoy and in all cases outside the 20 m. contour. Vessels waiting Pilots anchor in these areas.

Anchoring in the vicinity of the Ekofisk Pipe-line is to be avoided. See Notice to Mariners (Trinity House) No. 2724 of 1977.

RESTRICTIONS: *Traffic Control:* This is operated by the Harbour Master when vessels over 200 m. in length are moving within the river limits.The primary purpose is to allow the subject vessel to negotiate the channel without embarrassment from other traffic. Overtaking/passing is decided by the Harbour Master when circumstances favour such actions.

Restricted Transit Control: This is imposed by the Harbour Master upon vessels carrying certain hazardous cargoes. The subject vessel is intended to proceed from sea to berth or from berth to sea without meeting other traffic. As a consequence such vessel must be restrained from entering the main channel until an 'all clear' route is available. Some regulated passing.

Port Safety Control: Masters of ALL vessels before committing their ships to the River Tees Channel are required to satisfy the Harbour Master in respect of shipboard equipment by affirming to the following questionnaire:—

Question No. 1: Your vessel is in all respects seaworthy.

Question No. 2: All secondary power or mechanical systems are in operation and *immediately* available in the event of failure of any primary system.

Question No. 3: Steering is under direct manual control.

Question No. 4: Anchors are ready for use.

In view of the controls it is essential for contact to be made with the Harbour Master before considering entering the river, leaving the berth.

VHF Radio use Channels 22, 16 or 14 to contact. Telephone Eston Grange 2541.

Middlesbrough Dock: Middlesbrough Dock is an impounded area which normally operates between 2.5 hours before HW to 1.5 hours after. Shipping for this dock restricted in size to 176 m. overall length × 23 m. beam. Draft restrictions at the various dock quays supplied upon request.

MAX. SIZE: This matter is constantly under review. At present the largest dimensions acceptable are quoted as: Length 305 m. (1,000 ft.); Beam 46 m. (150 ft.); Draft 17 m. (55 ft.). this depends on the berth nominated, tidal influence and prevailing weather.

A vessel with unusual dimensions e.g. oil rig, or any vessel with dimensions approaching the port maxima must be the subject of consultation with the Harbour Master.

HEALTH: New Regulations. The Public Health (Ships') Regulations in force from 1.4.78.

See "Health - All Ports" before first U.K. port.

RADIO: Ships approaching from the North or at anchor in Tees Bay use Cullercoats Radio. Ships approaching from Southward use Humber Radio.

VHF Station	*Call sign*	*Channel Fitted (min.)*
Harbour Master's Office	TEES HARBOUR RADIO	22,16,14,12,11,9,8
Harbour Master's Launch	TEES HARBOUR LAUNCH	16,14,12,11,9,8,6
Middlesbrough Dock	MIDDLESBROUGH DOCK RADIO	16,14,12,11,8
Tees & Hartlepool Port Authority Maintenance Craft	"NAME"	16,11,6, etc.
Tees Pilot Cutter	TEES PILOTS	16,14,12,9,8,6
Tees Pilot Station (So. Gare)		16,14,9
Tees Tugs	NAME	16,14,12,8,6, etc.

Tees Harbour Radio is manned 24 hours per day and is also available to Hartlepool shipping for relaying port operational messages.

Channel	*Use*	*Channel*	*Use*
22	Port Operations	11	Domestic Port Operations
16	Calling and Safety	9	Pilot Port Operations
14	Port Operations	8	Intership
12	Port Operations		

TUGS: Official Address: Tees Towing & Co. Ltd., Cleveland Buildings, Queen's Square, Middlesbrough, Cleveland TS2 1NX. Tel. Middlesbrough 47277 day and night.

Fleet of 8 tugs between 1,550 and 3,650 h.p. Tugs join vessel in Redcar Reach between No. 9 and No. 17 buoys depending on size, draft and destination. Tug's lines may be used at Master's discretion.

Tugs are on duty daily and only available on 6 hours notice for sailing and arriving after normal office hours.

BERTHING: Small vessels can usually berth at any stage of the tide. Middlesbrough Dock, which as stated, operates for up to 4 hours at each HW. Deep drafted vessels enter in accordance with the tide.

T.H.P.A. General Cargo Facilities:

Tees Dock: No. 1 Quay. Four conventional general cargo berths each of 183 m. length and 1 of 190 m. length with flush faced quay. Road and rail access to all vessels. Ample cranage and spacious sheds/open ground. Nominal dredged depth 9.4 m. below LAT.

No. 2 quay: Two new berths each 183 m. in length have been built and equipped with electric luffing cranes up to 25 tonnes capacity. This quay is presently serving as the United Kingdom West African Lines terminal.

Middlesbrough Dock: 2,085 m. of quayage available on 6 different berths fully equipped with electric cranes, transit sheds and warehouse accommodation. Docking and undocking in the enclosed dock normally takes place between 2.5 hours before and 1.5 hours after high water. Entry/departure is controlled by light signals.

STEVEDORES: In order to prepare for loading/discharging, i.e. ordering of gangs, transport, etc., it is necessary to give ETA through their Agents not less than 24 hours before arrival.

In Tees berths, the port works 2 shifts daily, i.e. 0600–1400 hrs. and 1400–2200 hrs. Mondays to Fridays, with voluntary overtime at weekends.

BULK HANDLING FACILITIES: *Redcar Ore Terminal;* Handles iron ore imports for British Steel. Berth dredged to nominal 17.25 m. and able to accommodate vessels up to 335 m. in length, approx. 150,000 d.w.t. Two ore dischargers capable of handling 2,000 t.p.h.

Potash Terminal; Built on the East side of Tees Dock, this terminal is for the export of Potash mined in North Yorkshire. Dredged to a nominal depth of 10.88 m., the quay is intended to accommodate vessels simultaneously. The main loader is capable of 2,000 t.p.h.: a silo on the site has a storage for 56,900 capacity storage.

TANKER BERTHS:

Name	*Vessel Length (m.)*	*LAT Nominal depth (m.)*	*Remarks*
No. 1 Jetty Riverside	295	18.2	
No. 2 Jetty Riverside	295	18.2	
No. 3 Jetty Inset Dock	216		
No. 4 Jetty Inset Dock	295	18.2	Phillips North Sea Petroleum
No. 5 Jetty Inset Dock	295	18.2	
No. 6 Jetty Inset Dock	92		
No. 7 Jetty Inset Dock	67		
No. 8 Jetty Inset Dock	67		
Shell Crude Oil Jetty	265	13.32	
Tar Residual No. 1	197	9.72	
No. 2	78	9.72	
Tees Storage No. 1 Jetty	76	10.27	
No. 2 Jetty	179	10.27	
Monsanto No. 1 Jetty	152	5.1	
No. 2 Jetty		7.24	
Teesport Queen Elizabeth II Jetty	198	10.9	
Teesport West Byng Jetty	198	10.0	
North Tees I.C.I./P.I.P.			
No. 4 Jetty	271	12.72	
No. 3 Jetty	193	11.81	
No. 2 Jetty	201	10.89	
No. 1 Jetty	92	6.32	
Under Construction			
"A" Jetty	107	7.24	
Middlesbrough Dock			
South Wharf	82	4.8	
No. 2 Quay	176		Impounded dock. Max. draft dependant on tide.
Billingham Oil Wharf	80	4.5	

Billingham/Clarence/Deep Water Wharves handle tankers also.

ROLL-ON/ROLL-OFF FACILITIES: A link span Ro/Ro berth in Tees Dock can accommodate ships of up to 160 m. in length and 23.7 m. beam. Nominal dredged depth of 7.2 m.

Designed for loads up to 182 tonnes (when carried on 4 axles).

CONTAINER FACILITIES: A privately owned (Bell) purpose-built Container Berth utilising a 32 tonne gantry crane is established downstream of Tees Dock.

DENSITY: The density of the river water fluctuates with the seasons and rain amount, being between 1015 and 1025 mainly. Below Smith's Docks the fresh water influence is minimal.

FRESH WATER: Plentiful from wharf and small quantities available from tug in emergency, approx. 20 t.p.h.

FUEL: All grades available by road or river delivery. 48 hours notice of requirements is requested for barge delivery.

CRANES: Floating crane operators are established on the River Tees and have crane lifting in excess of 400 tons available.

MEDICAL: All medical facilities available. Vessels requiring doctor to board are advised to give maximum notice. Emergency medical attention can be arranged through VHF radio contact to Tees Harbour Radio on Channels 22, 16 or 14.

GANGWAY/DECK WATCHMEN: Recommended. Majority of berths are tidal with 5 m. range at Springs.

OPENING/CLOSING HATCHES: Always by crew. Riggers available.

CUSTOMS ALLOWANCE: 0.5 lb. tobacco or 200 cigarettes. (0.25 lb. tobacco for coasters). 1 spirit and 1 wine bottle (0.5 bottle spirit and 0.5 bottle wine for coasters).

IDENTIFICATION CARDS: Not used in Tees.

CONSULS: Sweden, Norway, Denmark, Netherlands, Portugal, Belgium, West Germany, Finland. Also French Consular Agency.

REPAIRS: Facilities available for all deck or engine repairs.

DRY DOCKS: 4 dry docks at South Bank (Smiths Dock), up to 175 m.× 22 m.

AIRPORT: Teesside Airport with regular flights to London, etc. is 12 miles from Middlesbrough Centre.

REPATRIATION: All facilities exist.

TIME: GMT in Winter months. BST (GMT +1) operates between late March and mid-October as decided by government.

HOLIDAYS: Normal English Bank Holidays. On certain holidays work can be arranged if suitable notice is given.

POLICE/AMBULANCE/FIRE: Telephone 999 in emergency. If no phone available contact the Harbour Master on VHF Radio Channel 16 or 14.

TELEPHONES: Many berths can be connected to telephone system using coin boxes; a connection charge is made.

TETNEY MARINE TERMINAL: 53.32 N. 00.07 E.

DOCUMENTS: The following documents should be completed for arrival:

Crew Manifest, C142.
Health Declaration, PS1.
Crew List, IB6.
Stores on Board List.

These documents will be handed to the Master of the Conoco work boat who will take them to Immingham for perusal by HM Customs and Immigration. On the return trip of the work boat the Agent and Customs will board to clear the vessel and attend to ships business. Pratique is granted by HM Customs when they visit the vessel.

Stores can be taken at the berth provided the Agents are given the order at least 72 hours before arrival.

LOCATION: *Tetney Marine Terminal* is the deep water crude oil terminal of Crude Oil Terminals (Humber) Limited, operated by Conoco Limited.

The position of the mono-buoy is Lat. 53° 32′ 18″ N., Long. 00° 06′ 48″ E., lying in approx. 60 ft. of water at low water and about 2.5 miles offshore.

Tetney is an open roadstead in the entrance of the River Humber on the East coast of England. The tidal rates in the vicinity of the mono-buoy reach 3.5 knots during Spring tides and the direction of the ebb and flood tides is generally East and West respectively. The tidal range varies between 7 ft. and 22.5 ft.

PILOTAGE: Vessels are requested to send ETA and draft to Spurn Pilot 12 hours before arrival and any adjustment to that time at least 2 hours before arrival. Spurn Pilots listen continuously on VHF Channel 16 and use Channel 14 as a working frequency.

Additionally, Agents should be advised of ETA 72 hours before arrival and the following information should be included in the cable, arrival draft, size of forecastle centre mooring fairlead, bow to manifold distance and cargo manifold size.

Pilotage is by Humber Pilots who board in the vicinity of the Humber Light Vessel from a fast launch. Additional berthing information can be obtained from Tetney Base.

The Berthing Controller and his Assistant will board as the vessel approaches the mono-buoy and will assist the Pilot in the mooring operation. He will advise the ships Officers during the mooring operation, hose connection and disconnection, and will act as Company representative throughout the vessel's stay in the berth.

Vessels must provide a pilot ladder with spreaders and grab lines for the Pilot and Berthing Controllers to board and whilst in the berth a suitable gangway with a pilot ladder near the end in order to board from a small boat.

HEALTH: See "Health – All Ports" before first U.K. port.

VHF: There is a VHF station at Tetney which is manned 24 hours a day and has the call sign, 'Tetney Base'. A continuous watch is kept on VHF Channels 16, 19 (161.55/156.95), and 48 (163.00/158.40). Channel allocation is as follows, 16 calling, 19 ship to shore, and 48 port operations. UHF (467.725 mc/s.) is allocated for use by the Conoco Berthing Controller, Tetney Terminal and the Conoco owned work boats.

The Pilot and Berthing Controllers carry portable VHF hand sets for use during berthing for inter-ship and ship to tug communications, Channel 9 (156.45 mc/s.).

Portable radios can be provided for vessels not having a VHF set and the Agents should be so informed in order to allow time to dispatch a set to the ship on arrival. A vessel arriving without suitable means of communication and not having informed the Agent of the fact could incur delays.

BERTHING: The following equipment is required to moor and is placed aboard the vessel when the Berthing Controller boards from the Conoco service craft, Spurn Haven:—

2 each 50 ton S.W.L. alloy steel shackles.

2 each 44 mm. diameter wire securing strops with a 2 m. soft eye at each end, overall length 37 m.

In addition to this mooring gear hose hang-off chains and securing equipment is placed aboard at the same time.

The vessel approaches the mono-buoy on a Westerly heading. A messenger (min. 40 mm. diameter) should be lowered to the water and this will be picked up by the Conoco mooring launch "Monogirl" when approx. 150 m. from the mono-buoy. This messenger will be made fast to a 80 mm. × 92 m. polypropylene pick up rope which should be heaved up as the vessel makes the final approach to the buoy. When the chafing chain is in the fairlead the open links are shackled to the wire strops which are turned up on a suitably sited set of bitts.

HOSES: Hoses are taken on the port side and the port derrick (min. S.W.L. 10 tons) should be rigged and ready for use on arrival.

Two 16 in. hoses are taken aboard, manifolds should be 16 in. 150 A.S.A. and 10 in. and 12 in. 150 A.S.A. can be accommodated by the provision of reducers. Should a vessel have any other size of manifold or be unable to provide adaptors to suit one of the sizes, Tetney Terminal will need to be notified at least 72 hours before arrival.

Hose connection and disconnection is carried out by the ships crew under the supervision of the Berthing Controller. Upon completion of discharge the hoses will be filled with sea water by the ship after which disconnection can commence. When the hoses are blanked off they will be hung off until just before sailing when they will be lowered to the Spurn Haven for towing clear.

POLLUTION: It is the Master's responsiblity to see that no oil of any kind is pumped or spilled overboard from his vessel. This includes oil water from the bilges, crude residues from previous voyages or any other matter that may result in the pollution of the sea. Owners and Masters should comply with any international regulations and recommendations concerning the prevention of pollution of the sea, especially in regard to the river Humber.

SHORE LEAVE: None of the officers or crew shall be allowed shore leave and no boats of any kind, except in an emergency, shall be lowered during the vessel's stay in the berth.

TYNE DISTRICT: 55.01 N. 01.24 W. (See Plan Book)

(Including Newcastle, North and South Shields, Jarrow, Tynemouth, Wallsend and Gateshead).

AUTHORITY: Port of Tyne Authority.

DOCUMENTS:

1 Crew List for H.M. Immigration Office.
1 Form C.142 (Tobacco List) supplied by H.M. Customs.
1 List of Private Addressed Packages not manifested (C.143) supplied by H.M. Customs.

Details of Oil in DBT, also measurement in cu. ft. of cargo in non-registered spaces.

PILOTAGE: Pilots normally stationed outside Harbour entrance within 1 mile radius. In bad weather Pilots will advise concerning entering. 12 hours advance notice via Agent requested. Frequency medium wave 2182 kHz. Call "Tyne Pilots". VHF – Call on Channel 16, working Channel 6. Cutter – 55 ft. in length painted black with white lettering "Pilots" – displaying pilot's flag. Efficient pilot ladder required as per Board of Trade regulations.

ANCHORAGE: Off entrance River Tyne, recommended 1.5 mile N.E. of North Pier. Minimum 12 fathoms.

RESTRICTIONS: Depths below Chart Datum (L.A.T.) from piers to West end of Jarrow Oil Wharf: 8.61 m. thence to Newcastle Bridges (except in main channels of Swing Bridge and High Level Bridge): 6.0 m. thence to West end of Dunston Staith: 4.8 m.

MAX. SIZE: Harbour entrance, length and breadth: no limit. Draft 8.0 m. any state of tide: up to 11.0 m. at high water.

Riverside Quay, draft up to 10.00 m.
Esso Oil Terminal, draft up to 9.00 m.
Newcastle Quay, 25–26 berths – 8.0 m.
RHM Mill, Gateshead – draft up to 7.0 m.

HEALTH: See "Health – All Ports" before first U.K. port.

RADIO: Cullercoats Radio W/T "GCC." Cullercoats Radio On R/T.

PORT OPERATIONS AND INFORMATION SERVICE: VHF: Call sign "Tyne Harbour Radio" on Channel 16, frequency 156.80 mHz and on Channel 12, frequency 156.60 mHz. The control station is situated at the Harbour Master's Office, North Shields, and is manned on a 24 hour basis. Vessels must obtain permission by VHF from the control station before entering the port, similar permisson must be obtained before movement within, or before sailing from the port. A service is provided for the passing of information to shipowners and Agents.

TUGS: Normally join inside piers, tow ropes optional except manufactured of man-made fibres. Orders for week-end arrivals must be given before 1030 hrs. Saturday. Rates on application to Tyne Tugs Ltd. Tel: South Shields 553361.

BERTHING:

Albert Edward Dock:

Warehouse Quay: 356 m. long, depth of water 7.9 m.

East Dock Wall: 161 m. long, depth of water 7.9 m.

Ro-Ro Berth No. 1, East Dock Wall: depth of water 7.5 m.

Heavy Load Berth (Ro-Ro No. 2) for heavy unit loads on transporters up to 510 tonnes; depth of water 7.5 m.

Tyne Commission Quay: 335 m. long, depth of water 7.11 m.

Tyne Commission Quay Extension: 118 m. long, depth of water 6.21 m.

Car Ferry Terminal:

Ro-Ro No. 3: 180 m. long, depth of water 7.11 m.

Ro-Ro No. 4: 140 m. long, depth of water 7.5 m.

Tyne Dock:

North West Quay: 243 m. long, depth of water 8.2 m.

Factory Quay: 196 m. long, depth of water 7.0 m.

Riverside Quay: 264 m. long, depth of water 10.5 m.

Sutherland Quay (Waiting Berth): 137 m. long, depth of water 6.51 m.

Newcastle Quay:

930 m. long, depth of water up to 8.61 m.

Spillers Tyne Mill: 173 m. long, depth of water 8.01 m., discharge rate 150 tonnes per hour.

RHM Mill: 198 m. long, depth of water 8.01 m., discharge rate 150 tonnes per hour.

Jarrow Staith: 2 berths, depth of water 7.11 m. Loading rates 1,000 tonnes per hour East berth, 500 tonnes per hour West berth.

Harton Staith: 1 berth, depth of water 6.4 m.

Dunston Staith: 3 berths, depth of water 5.5 m.

TANKERS:

Shell (UK) Limited, Jarrow. 189 m. long, depth of water 8.0 m.

Esso Petroleum Company Limited, Howdon:–

Ocean Jetty: 274 m. long, depth of water 9.51 m.

Coaster Jetty: 167 m. long, depth of water 6.0 m.

Velva Liquids Limited, South Shields: 170 m. long, depth of water 8.0 m.

Velva Liquids Limited, North Shields: 248 m. long, depth of water 7.11 m.

Tanker Cleaning Berth Howdon: 248 m. long, depth of water 7.11 m.

SERVICES: The tanker-cleaning berth at North Shields provides accommodation for vessels about 248 m. length, depth alongside 7.11 m. below Chart Datum. The shore installation, which is owned and operated by the Tyne Tanker Cleaning Co. Ltd., includes large reception capacity for tank washing and oily sludge, separators of the latest type which can deal with oily water at the rate of 1,000 t.p.h. and various treatment and storage tanks; together with boilers and steam pumping plant. Expert staff and modern equipment for carrying out tank washing, cleaning and gas-freeing of vessels at the berth, and for other essential duties are also available, making it possible for tanker crews to be paid off immediately on arrival. The whole installation is protected by a most complete system of fire precautions and fire-fighting equipment.

BRIDGES: At Newcastle 10 miles from entrance for proceeding to Dunston Staiths, Swing Bridge negotiated against tide; other bridges, max. mast height 24.7 m. above MHWS.

STEVEDORES: Principal Stevedores Port of Tyne Authority. All arrangements through Agent. Stowage plan required prior to arrival.

Plant pool as follows:–

Albert Edward Dock:

Warehouse Quay – 4 cranes, 5–6 tonnes.

East Dock Wall – 3 cranes, 5 tonnes.

Tyne Commission Quay – 7 cranes, 3–40 tonnes.

Tyne Commission Quay Extension – 2 cranes, 6 tonnes.

Ro-Ro Berths – 3 terminal tractors.

Tyne Dock:

Riverside Quay – 5 cranes, 10 tonnes.

North West Quay – 9 cranes, 3–10 tonnes.

Factory Quay – 2 cranes, 3 tonnes.

Newcastle Quay: – 13 cranes, 3–30 tonnes.

There is a pool of 55 fork lift trucks of 5,000–22,000 lbs. capacity available for any location. These trucks can be fitted with attachments for handling paper, pulp, etc.

MEDICAL: Hospitals available, Advise Agent in advance if medical attention required on arrival.

DENSITY: Entrance/Tyne Dock – 1025; Tyne Dock/Jarrow 1020; Newcastle Quay 1005/1010.

FRESH WATER: Available ex Water Boat, rate of delivery up to 150 t.p.h.

FUEL: All grades ex installation, or by barge, 24 hours notice required.

GANGWAY/DECK WATCHMEN: Available if required.

OPENING/CLOSING HATCHES: Crew allowed open and close.

CUSTOMS ALLOWANCE: At the discretion of Local Customs Inspector. Normal allowances are equivalent of 0.5 lb. tobacco per man and equivalent to 1 bottle wine per man. Allowances may be halved for home trade vessels. Vessels in port more than 3 or 4 days may receive extra allowances.

CERTIFICATES:

Register.

Load-line.

Safety Construction.

Safety Equipment.

Safety Radio.

Trinity Light Bills.

IDENTIFICATION CARDS: Not required.

CONSULS:

Belgium	tel.	Newcastle	612711
Chile	„	„	611661
Denmark	„	North Shields	78115
Finland	„	Newcastle	612711
France	„	Whitley Bay	525320
Germany (Fed. Rep.)	„	Newcastle	610171
Norway	„	„	26171
Greece	„	„	25414
Iceland	„	„	841112
Italy	„	„	28971
Liberia	„	„	612711
Luxemburg	„	„	612711
Netherlands	„	„	27314
Sweden	„	„	850621
Latvia	„	„	25060
Spain	„	Wideopen	4126/7

REPAIRS: All types of repairs possible at many building/repair yards.

DRY DOCKS:

Name of Owner or Occupier	*Dock*	*Length on Bottom (m.)*	*Breadth at Entrance (m.)*	*Depth on Sill at M.H.W.S (m.)*
NORTH SIDE OF RIVER				
*Wallsend Drydocks Ltd. Wallsend	No. 1	170.7	23.2	7.9
	No. 2	149.4	21.3	8.1
	No. 3	173.7	24.4	8.45
	No. 4	217.9	32.0	9.4
Smiths Shiprepairers (North Shields) Ltd., North Shields	No. 5	152.4	20.7	7.4
	No. 6	167.6	22.1	6.9
	No. 7	90.5	15.9	5.4
	No. 8	216.1	29.6	8.5
	No. 9	149.4	20.7	7.1
	Shields, Eng:	55.5	12.2	5.5
	Bairds Dept:	48.8	13.7	6.7
*British Shipbuilders, Wallsend Slipway	No. 1	164.6	20.1	7.6
SOUTH SIDE OF RIVER				
*Brigham & Cowan Ltd., South Shields	No. 1	217.9	28.9	7.6
	No. 2	138.7	16.6	7.3
	No. 3	62.2	11.9	5.0
Tyne Dock Engineering Co. Ltd., South Shields	No. 1	96.0	13.7	5.0
	No. 2	85.3	14.0	5.6
*Middle Docks & Engineering Co. Ltd. South Shields	No. 1	103.6	14.6	5.5
	No. 2	145.4	17.7	6.4
	No. 3	152.4	19.5	7.2
	No. 4	197.1	24.4	7.9
*John Readhead & Sons Ltd., South Shields	No. 1	100.9	14.6	7.2
	No. 2	146.3	19.8	7.2
*Mercantile Dry Dock Co. Ltd. Jarrow	No. 1	129.5	18.3	5.5
	No. 2	110.3	15.2	5.5
	No. 3	137.2	18.3	6.4
	No. 4	182.9	25.9	7.3

*The headquarters of the six nationalised Tyne Shiprepair Yards is:–

29 CORSTOPHINE TOWN,
SOUTH SHIELDS,
Tel. No: 560161
Telex: 537759.

Slipways:

Name of Owner or Occupier	*No. of Slipways*	*Length of Cradle*
NORTH SIDE OF RIVER		
Clelands Shipbuilding Co. Ltd., Wallsend (British Shipbuilders)	2	76 m. 94.5 m.
SOUTH SIDE OF RIVER		
R.B. Harrison & Son Ltd., Bill Quay	2	61 m. 27.4 m.

REPATRIATION: All facilities available.

AIRPORT: Newcastle Airport, served by regular airlines.

TIME: British Standard Time, GMT plus 1 hour. GMT in Winter months.

HOLIDAYS: New Year's Day; Good Friday; Easter Monday; May Day; Spring Holiday; Late Summer Holiday; Christmas Day; Boxing Day.

POLICE/AMBULANCE/FIRE: Dial 999, and ask for service required.

TELEPHONES: Can be arranged on board at certain berths.

SHORE LEAVE: Allowed.

AGENT: Lambert Brothers Ship Agencies Ltd., 'B' Floor, Milburn House, Dean Street, Newcastle-upon-Tyne, NE1 1LY. Tel. Newcastle (0632) 27314. Telex: 53405. Cable address: "Lambros."

WARRENPOINT: 54.06 N. 06.16 W. (See Plan Book)

PORT LIMITS: Seaward to a line from Ryland River (South Coast) to Ross Memorial (North Coast) approximately 3,000 m. from Warrenpoint.

DOCUMENTS:

2 Crew Lists.

2 Passenger Lists.

1 Store List.

Vessel's Papers and Certificates.

1 Manifest or Bill of Lading.

PILOTAGE: Not compulsory. Pilot station at Greencastle Pier at entrance (North side) to Carlingford Lough. VHF (Warrenpoint Pilot) radio, Channels 16 and 12. Notice to Agents of ETA at 48 hours and 24 hours.
ANCHORAGES: Safe anchorage at Fairmont Roads S.E. Greenore and also inside Carlingford Lough N.W. of No. 13 Buoy.
RESTRICTIONS: None except draft of vessel. Advise Agents.
HEALTH: No certificate necessary. In event of disease or fever contact Agent in advance. Hospitals available.
Also see "Health-all ports" before first UK port.
RADIO: All messages to Agents through Portpatrick Radio or Anglesea Radio.
VHF: Pilot station (Warrenpoint Pilot) and Port Radio (Warrenpoint Harbour) on Channels 16 and 12.
TUGS: None.
BERTHING: All berths except Town Dock have 17 ft. at LWOST.
STEVEDORES: Warrenpoint Harbour Authority. Telephone: Warrenpoint 3381. Telex: 74660
CARGO HANDLING FACILITIES:
2 35 tonne Liebherr Transporter Container Cranes;
1 Poclain HC300 Hydraulic Crane;
1 Jones 971 HLB Dockside Crane;
2 Babcock Wilcox Luffing Grabbing Cranes;
BULK CARGO FACILITIES: Coal – 2 Luffing Grabbing Cranes at 150 t.p.h.
Grain discharged at up to 250 t.p.h. to Grain Silo of 8 bins, total capacity about 4,800 tonnes.
SPECIALISED CARGO HANDLING FACILITIES: Roll-on/Roll-off berth with 15 ft. at LWOST. Bridge has HA loading. Ramp 6 m. wide Marshalling area about 8 acres.
FUEL: Available by road tankers. 48 hours notice usually required.
FRESH WATER: Available from pipes on quay.
CONSULS: None.
REPAIRS: Small repairs can be undertaken.
DRY DOCKS: None.
SURVEYORS: Lloyds – Jos. Fisher & Sons, Ltd. Warrenpoint 3500.
GANGWAY/DECK WATCHMEN: Neither compulsory nor necessary.
HATCHES: Opening and closing by crew.
CUSTOMS ALLOWANCE: As permitted by UK Customs and Excise.
CARGO GEAR: Ship's gear only used if shore cranes not available.
REPATRIATION: Airports (Belfast and Dublin) 2 hours away. Transport available. By sea – Belfast 1 hour.
AIRPORTS: Belfast (Aldergrove) 60 miles. Dublin 75 miles. Schedule flights daily to London.
TIME: GMT.
HOLIDAYS: New Year's Day; St. Patrick's Day (17th March); Easter Monday and Easter Tuesday; 1st Monday in May; 12th July; Christmas Day and Boxing Day.
POLICE/AMBULANCE/FIRE: Dial 999 and ask for service required.
TELEPHONES: Not possible to place telephones on board.
SERVICES: Check with Agents. Most services can be supplied given 24 hours notice.
SHORE LEAVE: After clearance inwards, crew members allowed ashore without restriction. No passes issued.
DELAYS: Delays in loading or discharging are minimal and infrequent.
AUTHORITY: Warrenpoint Harbour Authority.

WATCHET: 51.11 N. 03.20 W. (See Plan Book)

DOCUMENTS: Crew List, Store List, Ships Register, Manifest or Bills of Lading.
PILOTAGE: Trinity House Outport District, Compulsory, ETA 24 hrs. before arrival to Harbour Masters Office, Watchet 31264, after hours Minehead 3430.
ANCHORAGE: Safe anchorage Blue Anchor Road.
RESTRICTIONS: Accordance with state of tide and draft. Vessels enter 2 hours before H.W.
MAX. SIZE: Max. permissible length 97 m., breadth 16 m., draft restrictions according the height of tides, max. draft Neap tides 12 ft. and Spring tides 14–16 ft.
HEALTH: See "Health – All Ports" before first U.K. port.
RADIO: It is best for vessels to give ETA by RT to Lands End or Ilfracombe Radio.
VHF: Watchet Radio Channels 16, 12 and 14.
TUGS: None.
BERTHING: 2 quays, 1 of 150 m., 1 of 120 m.
CRANES: 3 cranes, 2 of 5 tons, 1 of 10 tons.
BULK CARGO: Cranes with grabs.
STEVEDORES: Watchet Marine Ltd.
MEDICAL: Port Doctor in Watchet.
DENSITY: Salt 90%.
FRESH WATER: Available on the quay.
FUEL: All grades, advance notice required.
FIRE PRECAUTIONS: Normal port precautions.
CONSULS: Bristol.
REPAIRS: Normal repairs to ships possible notice required.
SURVEYORS: Available from nearby ports.
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Carried out by crew.
CUSTOMS ALLOWANCE: Decided by the Customs officer in charge.
CARGO GEAR: Shore gear, cranes and forklifts.
REPATRIATION: Facilities exist for crew changes.
AIRPORT: Nearest airport at Bristol.
TIME: GMT and British Summertime.
HOLIDAYS: Cargo work can be arranged.
POLICE/AMBULANCE/FIRE: Phone 999 for all three services.
TELEPHONES: None on quay.
SHORE LEAVE: Allowed.
IDENTIFICATION CARDS: None required.
DEVELOPMENTS: New warehouse and lorry park.
AUTHORITY: West Somerset District Council.

WHITEHAVEN: 54.33 N. 03.36 W. (See Plan Book)

DOCUMENTS: Usual required for clearing a vessel from foreign port, i.e. Crew list, Passenger list, Customs Documents, Ships Register, Manifest and Bills of Lading.
PILOTAGE: Request for Pilot is made by International Code signal G, sound and visual. ETA should be sent 12 hours in advance either to ship's Agent or Harbour Master or both. Area for taking Pilot on board 4 to 5 cables West of Harbour. Pilot boat is a 36 ft. varnished boat, name "J. T. Pears". VHF is installed.
ANCHORAGE: Same area as for boarding Pilot according to draft.
RESTRICTIONS: Vessels may dock from 1.5 hours before high water till 1 hour after high water according to draft.
MAX. SIZE: 270 ft. length, 40 ft. beam and 17 ft. draft (deepest) on spring tides, 14 ft. draft (deepest) on neap tides.
HEALTH: See "Health – All Ports" before first U.K. port.
RADIO: Port Patrick and Anglesey Radio Stations.
TUGS: No tugs.
CRANES:
1×35 tonnes lifting capacity.
2×10 tonnes lifting capacity.
1×15 tonnes lifting capacity.
2×5 tonnes lifting capacity.
MEDICAL: Agent should receive notice in advance of any medical treatment required. Hospital services are readily available.
DENSITY: Any state of tide density is 1025.
FRESH WATER: Fresh water is available on all berths, any quantity on request to ship's Agent.
FUEL: Most grades and types available.
FIRE PRECAUTIONS: Usual precautions are taken when inflammable cargo is being loaded or discharged.
GANGWAY/DECK WATCHMEN: Advisable to have a watchman but not absolutely necessary.
OPENING/CLOSING HATCHES: Always opened and closed by crew members.
CERTIFICATES: Derat certificate, Load Line certificate, Radio R/T certificate, etc.
CUSTOMS ALLOWANCE: 200 cigarettes, 1 bottle spirits.
IDENTIFICATION CARDS: None required.
CONSULS: Norway, Sweden, Denmark and the Netherlands.
REPAIRS: All types of deck and engine repairs carried out.
REPATRIATION: Facilities exist for effecting crew changes and arranging any necessary repatriations.
AIRPORTS: Nearest airports are at Manchester, Newcastle and Prestwick, all approx. 130 miles away.
HOLIDAYS: Cargo may be worked on following days: New Year's Day, Good Friday, Easter Monday, Whit Monday, August Monday, Christmas Day and Boxing Day.
POLICE/AMBULANCE/FIRE: Telephone numbers of these services in order are: Whitehaven 2616, 3181 and 2151.
TELEPHONES: No special arrangements exist for placing telephones on board vessels.
SHORE LEAVE: Crew members may come and go at all times.
DELAYS: There are very seldom any delays in berthing and none in loading, discharging or bunkering.
AUTHORITY: The Whitehaven Harbour Commissioners.

United States of America

GENERAL

AGRICULTURE: All ports

Arrival Notification: The vessels' Master or port agent should notify the U.S. Department of Agriculture (USDA) inspector at each port of arrival of expected time and location of arrival.

Documents: The cargo, stores, and crews' effects lists or manifests must be available for review by the boarding USDA inspector.

Inspection: The USDA inspector will examine the galleys, storerooms, lockers, mess areas, and crew quarters in some instances for prohibited plant materials (fruits, vegetables, and plants) and meat products. Some categories of food materials may require being placed under seal. Also, inspections may be made of onboard cargo and cargo holds.

Garbage: All food wastes aboard vessels arriving from foreign or offshore areas (except Canada) must be handled in accordance with USDA regulations. Garbage may be held aboard vessels in leakproof, covered containers for disposal at sea or, it may be removed with permission of a USDA inspector for disposition in approved facilities.

Treatments: If quarantine-significant pests are found aboard a vessel, an Emergency Action Order may be issued to the Master. It will prescribe what treatments are required to the affected articles or area of the vessel and when this treatment must be accomplished.

Animals/birds: All live animals or birds aboard vessels must be reported to the USDA inspector.

For additional information: Write to "Quarantines," U.S. Department of Agriculture, Federal Building, Hyattsville, MD 20782.

HEALTH: All ports.

The U.S. Public Health Service does not maintain Quarantine Stations at each port of entry. The smaller ports are under the jurisdiction of Quarantine Stations located at strategic ports of entry. Matters of public health significance occurring on vessels destined to ports not manned by Public Health Service personnel should be reported to the Quarantine Station having jurisdiction over that port.

U.S. PORTS

PORT	QUARANTINE STATION
Albany	New York
Alexandria	Baltimore
Anacortes	Seattle
Anchorage	Anchorage
Ashtabula	Chicago
Astoria	Seattle
Atreco	Houston
Baltimore	Baltimore
Bangor	Boston
Baton Rouge	New Orleans
Baytown	Houston
Beaumont	Houston
Bellingham	Seattle
Benicia	San Francisco
Boston	Boston
Brownsville	Brownsville
Brunswick	Miami
Buffalo	New York
Burnside	New Orleans
Cape Cod Canal	Boston
Castle Island	Anchorage
Charleston	Fort Monroe
Chicago	Chicago
Cleveland	Chicago
Coos Bay	Seattle
Cordova	Anchorage
Corpus Christi	Brownsville
Deer Park	Houston
Destrehan	New Orleans
Detroit	Chicago
Duluth-Superior	Chicago
Erie	Chicago
Eureka	San Francisco
Everett	Seattle
Fall River	Boston
Ferndale	Seattle
Freeport	Houston
Galena Park	Houston
Galveston	Houston
Geismar	New Orleans
Good Hope	New Orleans
Gramercy	New Orleans
Grays Harbor	Seattle
Green Bay	Chicago
Gulfport	New Orleans
Haines	Anchorage
Hampton Roads	Fort Monroe
Hilo	Honolulu
Homer	Anchorage
Honolulu	Honolulu
Houston	Houston
Hueneme	Los Angeles
Huron	Chicago
Jacksonville	Miami
Juneau	Anchorage
Kahului	Honolulu
Ketchikan	Anchorage
Kings Bay	Miami
Kodiak	Anchorage
Lake Charles	New Orleans
Long Beach	Los Angeles
Longview	Seattle
Los Angeles	Los Angeles
Magpetco	Houston
Metlakatla	Anchorage
Miami	Miami
Milwaukee	Chicago
Mobile	New Orleans
Morehead City	Fort Monroe
Myrtle Grove	New Orleans
Nawiliwili	Honolulu
New Bedford	Boston
New Haven	Boston
New London	Boston
New Orleans	New Orleans
New York	New York
Nikiski	Anchorage
Oakland	San Francisco
Ogdensburg	New York
Olympia	Seattle
Orange	Houston
Ostrica	New Orleans
Palm Beach	Miami
Panama City	New Orleans
Pasadena	Houston
Pascagoula	New Orleans
Pensacola	New Orleans
Petersburg	Anchorage
Philadelphia	Philadelphia
Piney Point	Baltimore
Port Adams	Houston
Port Angeles	Seattle
Port Arthur	Houston
Port Canaveral	Miami
Port Everglades	Miami
Port Huron	Chicago
Portland, Maine	Boston
Portland, Oregon	Seattle
Port Lavaca/ Point Comfort	Houston
Port Neches	Houston
Port St. Joe	Miami
Port San Luis	Los Angeles
Port Sulphur	New Orleans
Redwood City	San Francisco
Richmond, California	San Francisco
Richmond, Virginia	Fort Monroe
Riverhead	New York
Rochester	New York
Sacramento	San Francisco
San Diego	San Diego
San Francisco	San Francisco
Savannah	Miami
Searsport	Boston
Seattle	Seattle
Seward	Anchorage
Sitka	Anchorage
Skagaway	Anchorage
Smiths Bluff	Houston
Stockton	San Francisco
Tacoma	Seattle
Tampa	Miami
Texas City	Houston
Toledo	Chicago
Valdez	Anchorage
Vancouver	Seattle
Wilmington, Delaware	Baltimore
Wilmington, North Carolina	Ft. Monroe
Wrangell	Anchorage

Masters of Vessels arriving at United States ports

Effective July 1, 1973, radio pratique as a method of quarantine clearance will be discontinued at all ports under control of the United States. Changes in regulations, policies, and procedures concerning maritime public health clearance have been promulgated.

Vessels subject to routine inspection

Only vessels in the following categories will be subject to onboard public health inspection upon arrival at ports under control of the United States.

A. Crew or passengers having:

1. Temperature of 100° F (38° C) or greater (a) which persisted for 2 days or more; or (b) which was accompanied or

followed by any one or all of the following: rash, jaundice, glandular swelling; or
2. Diarrhoea severe enough to interfere with work or normal activity; or
3. On board occurrence of death, regardless of the signs and symptoms above.

B. Vessels which have been in a smallpox infected country during the 15 days prior to arrival in the United States.

C. Vessels which have been in a plague infected country in the 60 days prior to arrival in the United States.

Procedures. Vessels in any of the categories, A, B, or C above will be granted provisional pratique and boarded upon arrival for inspection. In addition, vessels boarded for quality control may be boarded upon or subsequent to arrival. In accordance with regulations you must inform the quarantine station, through your vessel Agent, at or nearest the intended port of your vessel's first arrival in the United States of the occurrence of illness as specified in A above. Based on information you provide your Agent, or information your Agent already possesses regarding your vessel's itinerary, your Agent will notify the quarantine station if your itinerary included a smallpox or plague infected country. Arriving vessels no longer need to complete a maritime public health declaration unless boarded for inspections as described above. The boarding inspector will provide the declaration.

These changes reflect our confidence that you will continue to report, in advance of arrival in the United States, the on-board occurrence of illness compatible with the signs and symptoms specified above.

PILOTAGE: North West Coast of U.S.A.
Columbia River Bar Pilots are "Sea Pilots" for all ports in Columbia and Willamette Rivers. Namely, Astoria and Portland (Oregon), Longview, Kalama and Vancouver (Washington) – when entering from sea and if providing above Astoria, Columbia River Pilots relieve Bar Pilots for balance of transit.

COLUMBIA RIVER BAR PILOTS
P.O. Box 81, Astoria, Oregon 97103
TWX 910-466-8014
Telephones (503) 325-2641 or 325-2642

RADIO FACILITIES

Pilot Boat Peacock	WS 7217
Pilot Boat Columbia	WYE 7344
Bar Pilots Office, Astoria (Ch. 16) (156.80)	KOK 360
Astoria Marinephone "KFX"	
Ships Call on	2206 kc/s
KFX Answers on	2598 kc/s

Or call on and receive KFX on Channel 26.

Pilot boat now equipped with single sideband radios.

Pilot boat guards 2182 kHz and will switch to working frequency after contact.

In order there be no delays, vessels due to arrive at the Columbia River and desiring a Bar Pilot, must cable or telephone the Columbia River Bar Pilots. (Pilot normally not on station unless cable or telephone message received.) USE RADIO STATION KLB, EVERETT, WASHINGTON at least 12 hours before arrival at the lightship. Code address, "BAR PILOTS, STATING THE TIME OF ARRIVAL". If transmitted by any other radio station, delay may occur. If vessel is equipped with VHF, use Channel 16 (156.80 mc/s.) to call the pilot boat or BAR PILOTS office, Astoria (KOK 360) and shift to Channel 13 (156.65 mc/s.)

PILOT LADDER INSTRUCTIONS

1. Please contact the pilot boat via voice radio (Channel 16 or frequency 2182) approximately 30 minutes prior to arrival for desired lee and boarding instructions.

2. The Columbia River Bar Pilots have 2 pilot vessels; the "Peacock" and the "Columbia". When the "Peacock" is on station, Masters will be instructed to rig their pilot ladder 4 ft. above the water's edge. When the Columbia is on station, the Master will be instructed to rig the ladder 10-12 ft. above the water's edge. The above-mentioned distances above the water are of the utmost importance, particularly in the case of the "Columbia", as the pilot boat can and has pulled the ladder down when it becomes pinched between the pilot boat and the side of the vessel. Pilot ladders and boat ropes shall not be permitted to drag in the water. No tag lines, pull ropes or trailing lines shall be attached to the bottom of the ladder.

3. Pilot ladders shall be rigged amidships, over "draft marks" clear of all obstructions, such as accommodation ladders, and clear of overside discharges from the engine room and deck scuppers.

4. The pilot ladder should be kept clean and used for embarking and disembarking Pilots only. The ladder shall be made in one continuous length, not 2 sections shackled or lashed together. The ladder shall be equipped with spreaders approximately 10 ft. apart in accordance with SOLAS regulations. The ladder must be in good condition, the treads horizontal and the upper surface of rough non-skid quality.

5. The ladder must be adequately lit at night by means of a light shining well over the ship's side in the vicinity of the ladder. The area of the deck where the Pilot boards and leaves should be free of debris and well lighted. Where portable stanchions and bulwark steps are used, they shall be rigidly attached to the ship's structure. A life ring with water light and lifeline attached should be ready at hand. Rigging of the ladder and embarking and disembarking of the Pilot must be under the supervision of a licensed officer.

6. Boat ropes are not to be used, all pilot boats are power propelled.

7. Manropes shall be of manila 3 in. circumference. The man ropes shall be free of any knots including the lower end. The man ropes should be rigged 1-2 ft. longer than the pilot ladder. Man ropes are not to be rigged for boarding unless otherwise advised.

8. Should vessel be fitted with a mechanical ladder, the ladder should have a double fall. Also, a conventional ladder must be kept ready at hand, should it be required.

9. If vessel is to take a deck load of logs, please discuss with your agent the building of a catwalk to provide safe passage to and from the pilot ladder.

SHIP'S OFFICER'S REPORT: The information given for the port of New Orleans (U.S.A.) applies to all the ports in the U.S.A. in the event of the vessel arriving from abroad or from a previous U.S. port. All the documents such as Crew List, Passenger List (Form I-418), Deck, Engine, Stewards & Bonded Stores Lists (Form 1303), Crew's Effects Declaration (Form 1304), are required in duplicate at each port for entry inward.

ALBANY, New York: 42.40 N. 73.45 W.

(See Plan Book)

DOCUMENTS: If first port of call in U.S., 2 complete Custom's Manifests describing all cargo on board and ports of discharge. Also 1 Cargo List for Albany cargo; 3 Crew Lists; 3 Store Lists, 3 Curio Lists, the Ship's Register, Load Line Certificate and Tonnage Tax Certificate.

PILOTAGE: Hudson River Pilot boards vessel off Yonkers, N.Y. Cable address: "Hudpilots, Yonkers, N.Y."

ANCHORAGES: Several anchorage areas in Hudson River en route to Albany if required due to weather. Vessels cannot anchor at Port of Albany.

RESTRICTION: Hudson River Channel to Albany has controlling depth of 32 ft. MLW. Vessels with draft in excess of 28 ft. will be required to transit river on favourable tide as directed by Pilot.

MAX. SIZE: Max. permissible length 750 ft.; breadth 110 ft., draft 30 ft. Turning basin at Albany 1,100 ft. in width.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New York Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: One 2,500-h.p. tug stationed at port at all times; additional tugs available upon advance request. Normally 1 tug is sufficient for turning and docking. Tug's lines are used.

BERTHING: 4,000 linear ft. of marginal wharf available at APDC terminal for general cargo, grain, lumber, etc., 32 ft. alongside wharf. Various privately operated deep-water petroleum terminals in port area.

Facilities: 13.5 million bushel grain elevator. 17 million gallon molasses storage – 3 terminals. Scrap Iron Terminal, Banana Terminal.

Equipment: Available at the Port of Albany:
2 Diesel-operated wharf cranes, 5 ton capacity each
1 Gasoline crawler crane, 15 ton capacity
3 Fork-type telescopic lift trucks, 15,000 lb. each (height of lift 17 ft.)
12 Fork-type telescopic lift trucks, 5000 lb. to 7000 lb. each
2 Clamp equipped telescopic lift trucks, 7000 lb. capacity each
9 Gasoline operated lumber carriers
2 Front-end loaders, 1.25 cu. yd. capacity each
1 180 ton capacity bulk car unloader
21 5/8 cu. yd. clamshell buckets
Hoppers for shipside bulk materials handling
Complete bagging equipment for all bulk materials

BRIDGES: Minimum vertical clearance of bridges on Hudson River en route to Albany is 135 ft.

STEVEDORES: Rates and information can be obtained from John W. McGrath Corporation; 7 gangs available.

FRESH WATER: Supplied during regular working hours daily except Saturdays, Sundays, and holidays at $1.50 per 100 cubic ft. plus $10.00 service charge per daily delivery on straight time. Additional charge if supplied during other periods.

GANGWAY/DECK WATCHMEN: Available via ship chandler not required but recommended.

CONSULS: Italian Vice-Consulate located at Albany, other consulates available at New York City.

REPAIRS: Minor deck and engine repairs can be handled.

AIRPORT: 7 miles distant from port: served by Allegheny, America, Altair and Executive Airlines.

TIME: Eastern Standard and Eastern Daylight Saving, 5 hours minus GMT.

HOLIDAYS: Standard U.S. holidays; cargo work can be arranged on all holidays at overtime rates, except July 4th, Labour Day and Christmas Day.

SHORE LEAVE: Crew members allowed ashore unless restricted by Customs or Immigration requirements.

AUTHORITY: Albany Port District Commission.

ALEXANDRIA, Virginia: 38.48 N. 77.03 W.

(See Plan Book)

DOCUMENTS/PILOTAGE: Refer to "Hampton Roads".
RESTRICTIONS: Anchoring necessary between 2200 to 0600 hrs. Berthing daylight only.
MAX. SIZE: Governed by draft only – max. 22 ft. 6 in. all times.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Baltimore Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: WMH Baltimore, Md.
TUGS: None required.
BERTHING: Berthing 0600 to 2200 hrs.
BRIDGES: 1 bridge, closed Monday through Friday 1600–1830 hrs. and 0630–0900 hrs.
STEVEDORES: Informally arranged through Receivers or Shipper's Agents.
MEDICAL: Hospital available.
FRESH WATER: Available at berth – 10 t.p.h.
FUEL: Not available.
GANGWAY/DECK WATCHMEN: Shore watchman provided.
OPENING/CLOSING HATCHES: Stevedores. Vessel – depending on understanding.
IDENTIFICATION CARDS: Required by Immigration.
REPAIRS: Minimal facilities.
REPATRIATION: Facilities exist.
AIRPORT: 3 miles. Washington National – multiple flights.
TIME: GMT minus 6 hours.
POLICE/AMBULANCE/FIRE: Agents arrange. Watchmen on duty.
SHORE LEAVE: Allowed.
DELAYS: No unusual delays.
AUTHORITY: Virginia Port Authority, Norfolk, Va.

ANACORTES, Washington: 48.31 N. 122.36 W.

(See Plan Book)

DOCUMENTS, PILOTAGE, etc: Refer to "Tacoma".
ANCHORAGES: East End Guemes Channel, 54 ft. min. depth.
MAX. SIZE: Length, open. Draft, 54 ft.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Join vessel in Guemes Channel at Anacortes – lines optional.
BERTHING: Pier no. 1, depth 31 ft.; Pier no. 2, depth 38 ft.
STEVEDORES: Request 24 hours notice.
FRESH WATER: Available from city water system.
FUEL: Available from Shell and Texaco.
GANGWAY/DECK WATCHMEN: Not required by port.
OPENING/CLOSING HATCHES: Stevedores.
CUSTOMS ALLOWANCE: No definite quantities prescribed; reasonable allowance at discretion of Customs Inspector.
CARGO GEAR: ILWU requirements.
IDENTIFICATION CARDS: Required.
REPAIRS: Minor repairs only.
AIRPORT: 75 miles Seattle International.
TIME: GMT minus 8 hours. From end April to end October, Pacific Daylight Saving Time, GMT minus 7 hours.
HOLIDAYS: See "Tacoma".
POLICE/AMBULANCE/FIRE: Police 293–3157; Ambulance 293–3183; Fire 293–3155.
TELEPHONES: Available at Pier 2 and at Pier 1 by Phone Co.
SHORE LEAVE: Allowed.
AUTHORITY: Port of Anacortes.
AGENT: See "Seattle".

ANCHORAGE, Alaska: 61.12 N. 150.00 W.

(See Plan Book)

DOCUMENTS:
- 3 copies Cargo Manifest (Forms 7527.A or 7527.B), the original showing all cargo on board, and 2 copies showing only cargo for this port.
- 2 copies Crew Manifest (curio list).
- 2 copies Stores List.
- 2 copies Passenger List (Form I.418).
- 2 copies Crew List (Form I.418).

Customs Boarding Officer will also examine Ship's Register and Load-line Certificate. In addition, the following documents will be required for formal entry to be made within 48 hours of arrival from abroad, or 24 hours from arrival from a United States port:
- Master's Oath (Customs Form 3255).
- All foreign clearances.
- U.S. Certificates of payment of tonnage tax (Customs Form 1002).
- Certified Crew List.

PILOTAGE: The pilot station for Anchorage is at Homer, Alaska. Vessels may contact Pilot by radio telephone. Telegraphic address "Almarrpilot", ETA notice requested 24 hours. Guards VHF Channel 10. Pilot boat green and white. Pilot flag by day, pilot light at night. Pilot boat 1 mile South of Homer Spit (Coal Point) Homer Alaska. In bad weather, wait inside Homer Spit and advise via radio-telephone.

Also see "Homer".

ANCHORAGES: The best anchorage for deep-draft vessels is West of Anchorage in depth of 10 to 12 fathoms, silt bottom. Holding ground is good.
TIDE AND CURRENTS: The diurnal range of tide is 29.6 ft., currents from 1.7 to 6 knots or more in mid-channel.
RESTRICTIONS: Flow and pan ice is encountered in the Cook Inlet from approximately the end of November until the end of February. This ice does not freeze solid due to the tidal action. The port is in year-round use and expert information on Winter conditions may be obtained from any of the highly qualified licensed ship pilots available in the area.
MAX. SIZE: All berths 35 ft. MLLW.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Port of Anchorage "KBT-42" on HF-AM and SSB. "WHJ-82" on VHF-FM.
TUGS: Join vessel 1.5 miles S.W. of docks.
BERTHING: 600 ft. general cargo Terminal No. 1, apron width 47 ft., live road limit 600 lb. per sq. ft. General cargo Terminals No. 2 and 3, 610 ft. and 893 ft. respectively, apron width 69 ft. Depth alongside face at MLLW 35 ft.

Shore Cranes: Level luffing gantry and Paceco container cranes. Capacity: Level luffing gantry 7.5 tons and 40 tons (5 ton high-speed whip lines). Container cranes 27.5 tons.

Outreach from fender face is 70 ft. for the gantries and 81 ft. on the Paceco. Clear height above MLLW is 132 ft.

TANKERS: The Petroleum Terminal at the port of Anchorage is contiguous to the general cargo docks. The POL Dock is 612 ft., long and contains multiple petroleum manifolds in addition to those on Terminal No. 1. Depth 35 ft. alongside.
STEVEDORES: Working Hours: Stevedores do not work on January 1st, September 6th, November 25th and December 25th. The first 6 hours of any shift between 8.00 a.m. and 3.00 p.m. is at the straight time rate. Work performed on Saturdays, Sundays, holidays and between 5.00 p.m. and midnight is at overtime rate. Meal breaks are 11.45 a.m. to 1.00 p.m. and 4.45 p.m. to 6.00 p.m. Stevedores do not normally work between midnight and 7.00 a.m.
SPECIALISED CARGO HANDLING FACILITIES: Two 27.5 ton Paceco container cranes servicing general cargo Terminal 2 and 3; private bulk cement pipe-lines to shore silos. Ro/Ro service available.
DENSITY: From 1.0098 to 1.0102.
MEDICAL: All facilities available. 3 local hospitals.
FUEL: All grades available.
FRESH WATER: Public Health Service certified water station.
GANGWAY/DECK WATCHMEN: Required shipside.
OPENING/CLOSING HATCHES: By stevedores.
AIRPORT: 5 miles; served by regular foreign and domestic airlines.
CUSTOMS ALLOWANCES: At the discretion of customs officer. Normal allowance is 200 cigarettes or 2 lb. tobacco and 1 quart wine or spirits per man. Additional allowances may be given if considered necessary, due to length of vessel's stay in port.
IDENTIFICATION CARDS: Standard U.S. Immigration Forms I.–95 to be made up for each crew member on arrival. Not necessary for crew men already holding Form I.–95, issued for the same vessel.
HOLIDAYS: New Year's Day (January 1st); Lincoln's Birthday Washington's Birthday; Seward's Day (March 30th); Memorial Day; Independence Day (July 4th); Labour Day; Columbus Day; Alaska Day (October 19th); Veterans' Day; Thanksgiving Day; Christmas Day (December 25th).
POLICE/FIRE/AMBULANCE: Police 272–1414; Ambulance/Fire 272–1515.
TELEPHONES: Telephones available shipside.
AUTHORITY: Port Director, Port of Anchorage.

ASHTABULA, Ohio: 41.53 N. 80.48 W.

(See Plan Book)

Refer to "St. Lawrence Seaway" for important general information.
PILOTAGE: Nearest pilot station is the Welland Canal, Canada.
ANCHORAGES: No anchorage inside boundaries. Good anchorage outside to East of the entrance, depth approx. 20 fathoms.
MAX. SIZE: The Pinney Dock and Transport Company stevedoring dock handling overseas cargoes located just East of entrance to the port. Channel depth of 28 ft. 4 berths, 27 ft. alongside; length of facilities up to 700 ft. by 75 ft. beam. No facilities for oil carriers.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Chicago Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Contact Lorain, Ohio ship-to-shore station for local connections.
TUGS: Tugs normally join vessels just inside harbour entrance. Use ship's or tug's lines optional; tug lines used at additional charge of 10% of the tons will be added. For tug service call ship-to-shore tug Idaho, FM Channel 51.
STEVEDORES: Work gangs for loading and unloading provided by the Pinney Dock and Transport Company.
MEDICAL: Vessels requiring medical attention call U.S. Coast Guard station located in the main river by calling AM Channel 20. Ambulance and hospital service available. No inoculation, vaccinations, or fever certificates required.
DENSITY: Fresh water.
FRESH WATER: Available at stevedoring dock.
FUEL: Available on 24-hour notice.

FIRE PRECAUTIONS: City fire department. Also water line on face of the dock available.
GANGWAY/DECK WATCHMEN: Overseas stevedoring dock enclosed wire fence, watchmen on dock at all times, guard at main gate.
OPENING/CLOSING HATCHES: Optional by crew or stevedores.
CUSTOMS ALLOWANCES: Only allotments per person consumed aboard allowed.
IDENTIFICATION CARDS: Required.
CONSULS: Nearest at Cleveland.
REPAIRS: All types of deck and engine repairs available; also topside shell repairs.
REPATRIATION: Can be arranged.
AIRPORT: Nearest airport approx. 10 miles South with commuter services to Cleveland Hopkins Airport. Cleveland Hopkins Airport approx. 70 miles West.
TIME: Local Eastern Standard Time except from May to October – Daylight Saving Time.
HOLIDAYS: Stevedoring docks double time on holidays and time plus one-half on Saturdays and Sundays.
POLICE/AMBULANCE/FIRE: Police, 993-8281; Ambulance, 964-3121; Fire, 964-7123.
TELEPHONES: No provisions for placing telephones aboard vessels.
SHORE LEAVE: Crew allowed ashore.
DEVELOPMENTS: Pinney Dock and Transport Co. are dredging a second slip (length 2,000 ft.) and constructing a third pier (length 2,000 ft., depth 28 ft.).
AUTHORITY: Ashtabula Port Authority.

ASTORIA, Oregon: 46.11 N. 123.50 W.

(See Plan Book)

PILOTAGE: Columbia River Bar Pilots, PO Box 81, Astoria, Oregon, 97103. TWX. 910-466-8014. Tel 503-325-2641. Also see "General – Pilotage" before first U.S.A. port (Albany).
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
BERTHING: The port of Astoria has 3 finger piers with 9 berths.
Pier 1: 2 berths – 167,000 sq.ft. covered shed, gallery for elevator – rail trackage.
Grain loading facilities: At Pier No. 1 Max. draft 37 ft. Loading rate 750 t.p.h.
Pier 2: 5 berths – 600,000 sq.ft. open area, bunkering facilities at berths 3-5-6, rail trackage.
Pier 3: 2 berths – 248,000 sq.ft. covered shed, barge ramp, rail trackage.
Water Depth: 35 ft. at inside berths, 40 ft. at outside berths.
STEVEDORES: Brady-Hamilton and Jones-Oregon.
FRESH WATER: Available delivery to vessel through portable hose.
AUTHORITY: Port of Astoria.
AGENT: See "Portland", Oregon.

ATRECO, Texas: 29.59 N. 93.53 W.

DOCUMENTS, PILOTAGE, RADIO, etc.: Refer to "Port Arthur".
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

BALTIMORE, Maryland: 39.17 N. 76.35 W.

(See Plan Book)

DOCUMENTS:
3 Copies Cargo Manifest (Forms 7527-A or 7527-B), the original showing all cargo on board, and 2 copies showing only cargo for this port.
3 copies Crew Manifest (curio list).
3 copies Stores Lists.
3 copies Passenger List (Form 1.–418).
3 copies Crew List (Form 1.–418).
Customs boarding officer will also examine Ship's Register and Load-line Certificate. In addition, the following documents will be required for formal entry to be made within 48 hours of arrival from abroad, or 24 hours from arrival from a United States port.
Master's Oath (Customs Form 1300) 3 copies.
General Declaration (Customs Form 1301) 3 copies.
All foreign clearances.
U.S. Certificates of payment of tonnage tax (Customs Form 1002).
Certificate Crew List.

PILOTAGE: Each vessel entering the Chesapeake Capes under foreign flag or carrying foreign cargo is required to employ a Pilot of the Association of Maryland Pilots. The Association maintains a pilot boat which is anchored at the entrance of the Chesapeake Capes. Pilots will be furnished with a small transistorised portable radio unit, which provide ships bridge to bridge communication system to ensure navigational safety while traversing the waters of Chesapeake Bay. It is a positive means of communication to ensure ship's position reporting, the safety and movement of vessels, as well as messages related to the operational needs of vessels proceeding to the port, and provide the Pilots communications instructions expediting operations of vessels when they are aboard.

The pilot boat has a black hull and is located 2 miles North of Cape Henry Lighthouse.

The pilot ladder should be 2 ft. above the water – manropes not required.

Send ETA pilot station via WMH 24 hours before arrival. Also advise if change in ETA is over 2 hours.

The ETA message should state whether arriving via Chesapeake and Delaware Ship Canal or Cape Henry, and deepest draft and speed of vessel.

Cable address of Pilot: "Marpilot, Baltimore", pilot vessel on VHF Channel 16, 13A and 18A.

ANCHORAGE: Numerous anchorages located within harbour limits for ocean-going vessels. 7 such areas are available for vessels of light and heavy draft. 4 of these anchorages are located on the East side of the main ship channel between the entrance channel to the Central Soya Company Grain Elevator and Fort Carroll. 2 are on the West side of the main ship channel, and 1 on the North side of Curtis Bay channel.

At Bloody Point, approximately 22 miles South of Baltimore, there is an emergency anchorage in natural deep water with depth of 50 ft. or more.

RESTRICTIONS: There are two different approaches and exits to the sea lanes. The principal route is by way of the Southerly course through the Chesapeake Bay and Cape Henry to the ocean. The distance by this route is approximately 150 nautical miles. There is a main ship channel 20 miles long from Baltimore to the Chesapeake Bay; this channel is 800 ft. wide and 42 ft. deep.

The other route to the sea lanes is via the Chesapeake and Delaware Ship Canal. This offers a short protected route between Baltimore and other leading North Atlantic ports by way of Delaware Bay and allows ships serving North Atlantic European ports to save about 115 miles sailing distance.

Entrance to the Chesapeake and Delaware Ship Canal is located about 50 miles North of Baltimore. The width of the channel is 450 ft. Max. draft 32 ft. The canal itself is 15 miles in length, and from the Delaware Bay side the distance to sea lanes is about 60 miles. Navigation lights are maintained so the canal is open to navigation day and night.

MAX. SIZE: Length 1,250 ft., draft 42 ft. at Canton Ore Pier.
HEALTH: See "Health; All Ports" before first U.S.A. port (Albany). Illness reports made to local Agent.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: The port has an efficient fleet of tug-boats in operation. The tugs usually take vessel in tow at Francis Scott Key Bridge.
BERTHING:
There are approximately 45 important piers and terminals, some of which are listed below:

Marine Terminals

Name	*Berths*	*Max. draft*	*Cranes*	*Special features*
Canton	10 General 3 Bulk	42 ft.		
Clinton St.	4 General	32 ft.	1 at 15 t 1 at 18 t	
Dundalk	12	34 ft.	1 at 70 t 7 at 40 t 2 at 50 t 2 at 60 t	Berths 7–12 for containers 1 Ro-Ro berth
Hawkins Point	2	36 ft.		Length 720 ft.
Locust Point	16 General 3 Bulk	34 ft.	2 at 75 t	Whirley, Gantry mounted at Pier 4
			1 at 100 t	Whirley, Gantry at Locust Point South
			2 at 40 t	For Containers at Locust Point South
			1 at 350 t	Stiff-leg derrick at Locust Point South
Port Colvington	10 General 7 Bulk	38 ft.	4 at 10 t 1 at 45 t	
Rukert Term Corp	6 General	35 ft.	6 at 15 t	
Sealand	1	32 ft.	1 at 27.5 t	Length 800 ft.
Terminal Corp	1	28 ft.		Length 419 ft.

Public Bulk Cargo Piers

Name	*Berths*	*Length*	*Breadth*	*Draft*	*Loading Cap./ Storage Cap.*
(Coal)					
Curtis Bay Coal Pier	2	900 ft.	117 ft.	42 ft. (Ship) 30 ft. (Barge)	6,000 t.p.h. 4,000 t.p.h.
Conrail Coal Pier	1	910 ft.	223 ft.	35 ft.	1,000 t.p.h.
Port Covington Coal Pier	2*	888 ft.	78 ft.	30 ft. to 25 ft. (ES) 40 ft. (WS)	3,500 t.p.h.
(Grain)					
Canton Pier 3	2	1,418 ft. (ES)	88 ft.	37 ft.	3,600,000 bushels
		690 ft. (WS)		32 ft.	75,000 b.h.p.
Locust Point Pier 7	2	1,000 ft.	67 ft.	37 ft. (2) 30 ft. (1)	3,880,000 bushels 40,000 b.p.h.
Port Covington	2	1,340 ft. (ES)	57 ft.	35 ft.	5,000,000 bushels
Pier 2		245 ft. (WS)			60,000 b.p.h.
(Ore)					
Canton	2	1,250 ft. (WS)	88 ft.	42 ft.	3,000 t.p.h.
Pier 2	1	800 ft. (ES)		25 ft.	
Curtis Bay Ore Pier	1	650 ft.	81 ft.	39 ft.	2,000 t.p.h.
Conrail Bulk Commodity Pier	2	1,200 ft.	64 ft.	30 ft.	800 t.p.h.
Port Covington Pier 6	3	1,524 ft.	66 ft.	30 ft. to 25 ft. (NS) 38 ft. (SS)	1,600 t.p.h.

BRIDGES: The Chesapeake Bay Bridge-Tunnel is located across the entrance to the Bay, between Cape Henry and Cape Charles. This vehicular crossing consists of fixed causeways and bridges, and 2 tunnels – one under the Chesapeake Channel and one under the Thimble Shoal Channel.

The Francis Scott Key Memorial Bridge crosses the main ship channel in Baltimore Harbour and is 8,640 ft. long, with main channel horizontal clearance of 800 ft. and vertical clearance of 187 ft. Vessels en route to the harbour from the ocean via the Chesapeake Bay pass under the Chesapeake Bay Bridge, about 151 statute miles above the ocean entrance to the bay. This bridge is 3.7 miles long from shore to shore; its Western end is 0.5 miles S.W. of Sandy Point and its Eastern end is on Kent Island, 4 miles S.W. of Love Point. The Curtis Creek and Middle Branch sections of harbour are each crossed by highway and railroad bridge.

DENSITY: The salinity of Baltimore harbour waters requires full fresh water draft allowance.

TANKERS:

Pier	*Operator*	*Berth*	*Length*	*Draft*
American Oil Co.	Amoco Oil Co.	1	60 ft.	30 ft.
		2	60 ft.	32 ft.
Ashland Oil	Ashland Oil and Refining Co.	1	426 ft.	33 ft.
B.P.–Texas Co.	B.P.–Texaco	1	520 ft.	33 ft.
Continental Oil Co.	Continental Oil Co.	1	700 ft.	34 ft.
Crown Central Pet. Corp.	Petroleum Marketing Inc.	1	800 ft.	32 ft.
Exxon Pier 1	Exxon	3	810 ft.	30–42 ft.
Exxon Pier 3	Exxon	2	405 ft.	27–30 ft.
Gulf Oil Co.	Petroleum Marketing Inc.	1	544 ft.	35 ft.
Hess Oil Co.	Amerada Hess	1	315 ft.	36 ft.
		1	250 ft.	23 ft.
Shell Oil Co.	Shell Oil Co.	1	800 ft.	23 ft. (WS) 35 ft. (ES)

Slop disposal facilities at Humble Oil Terminal.

MEDICAL: All facilities available.

FRESH WATER: Can be supplied at all berths. Water barges available.

FUEL: All grades supplied by numerous oil companies by barge or ex-wharf at the oil berths.

REPAIRS: *Bethlehem Steel Corporation.* At the Sparrows Point Shipyard vessels up to 300,000 d.w.t. are constructed, and the facilities include all the necessary equipment for the construction of large and small vessels.

2 other marine yards, 1 of which is located at Key Highway, while the second is located on the Eastern end of Locust Point adjacent to Fort McHenry. The facilities of these plants include 3 dry docks, 2 graving docks and 9 outfitting piers. These facilities handle all types of dry docking and ship repairs.

Maryland Shipbuilding and Dry-dock Company. This large marine shipyard is located on the water front at Fairfield. Plant facilities include 4 dry docks, 5 outfitting piers and 1 side launch way. All types of ship repairs are handled in this yard.

In addition to the above mentioned facilities there are numerous companies specialising in minor ship's repairs.

CUSTOMS ALLOWANCES: At the discretion of customs officers. Normal allowance is 200 cigarettes or 2 lb. tobacco and 1 quart wine or spirits per man. Additional allowances may be given if considered necessary, due to length of vessel's stay in port.

IDENTIFICATION CARDS: Standard U.S. Immigration Forms I–95 to be made up for each Crew member on arrival. Not necessary for crew man already holding Form I–95, issued for the same vessel.

CONSULS:

Argentina
Belgium
Bolivia
Colombia
Denmark
Dominican Republic
Ecuador
El Salvador
Finland
France
Guatemala
Honduras
Italy
Netherlands
Nicaragua
Norway
Panama
Senegal
Sweden
Tunisia
Turkey
Venezuela

TIME: Eastern Standard Time, GMT minus 5 hours. Daylight saving time, GMT minus 4 hours from April to October.

AUTHORITY: Maryland Port Administration.

BANGOR (Including Brewer and Orrington)
Maine: 44.49 N. 68.47 W. (See Plan Book)

LOCATION: Bangor is located on the West bank of the Penobscot River at the head of navigation. Brewer is on the East bank of the river opposite Bangor and Orrington is on the East bank of the river 2 miles below Brewer.

DOCUMENTS:

1 copy of Crew List.
1 copy of Passenger List.
2 copies of Stores Lists.
2 copies of Foreign Purchase Lists.
2 copies of Inward Foreign Manifest.
1 form 3251 (Master's Oath on entry of vessel).
2 forms 1374 outward foreign Manifest.

PILOTAGE: Pilotage is compulsory for all foreign vessels and U.S. vessels under register in the foreign trade, with a draft of 9 ft. or more, entering or departing from any port or harbour within the waters of Penobscot Bay and Penobscot River North of a line drawn from Marshall Point Light at Port Clyde, thence to Matinicus Rock Light, and thence to Western Head, Isle Au Haut. Pilotage is optional for vessels powered by sail.

Cable PENBAY via Chatham Radio. Ship's Agent usually notifies Pilot 48 hours and 24 hours before arrival at the Pilot station. Pilot boat usually stands by on their radio 1 hour before ETA on RT 2182 and the VHF Channel 16 (156.8). Pilot boards at Monhegan Is., Lat. 43° 45′ N., Long. 69° 22′ 5″ W. Pilot uses a white boat 36 ft. long and displays "H" by day and the Pilot signals at night. Vessels awaiting Pilot in bad weather must heave-to outside.

ANCHORAGES: The usual anchorage for vessels waiting at the river entrance for a towboat or favourable wind and tide is Northward of Fort Point on the West side of the channel.

Vessels bound up the river anchor anywhere in the channel where soft bottom is found. Vessels towing to Bangor, if the tide does not serve, often anchor off Winterport. On account of the strong ebb current, it is better for vessels going to Bangor, particularly large vessels, to anchor off Fort Point and start up the river about 3 hours after LW.

RESTRICTIONS: CHANNEL:– The controlling depth in the marked channel in Penobscot River from Bucksport to Bangor is 19 ft. to Winterport, thence 13 ft. to Bangor. The channel is marked by buoys to a point about 1.5 miles below South Brewer.

Caution: Deep-draft vessels should exercise caution above Fort Point as depths of 31 to 32 ft. are in mid-channel, about 0.5 mile Eastward of Sandy Point, and rocky ledge, covered 34 ft., also in mid-channel, is reported about 0.2 miles S.W. of Odom Ledge Daybeacon.

The most difficult sections for vessels are off Lawrence and Luce Coves just North of Bucksport where it is difficult to mark the best water and off Frankfurt Flats where large vessels experience difficulty with the sharp turns.

The channel in Penobscot River is crooked and narrow in places, and frequent changes occur. Vessels should not attempt to carry drafts greater than 10 ft. to Bangor at LW. With a deeper draft a Pilot or towboat should be used; 14 or 15 ft. is carried to Bangor and Brewer at HW, and deeper drafts occasionally to the oil berth at South Brewer. The safest time is on a rising tide. Navigation of the river at night is extremely dangerous due to lack of lighted navigation aids. After unusually high tides many logs, dangerous to small craft, are in the river. At times of maximum ebb currents, buoys are occasionally pulled under.

Tides: The mean range of tide varies from 10.3 ft. at Fort Point to 13.1 ft. at Bangor. Currents of 3 knots are not unusual from Odom Ledge to Orrington, and during Spring runoff currents approaching 5 knots may be encountered. Because of these currents, larger vessels should use caution navigating the river. Passage up the river is more advisable during flood current.

Ice impedes but usually does not prevent navigation above Winterport for nearly 5 months each year, beginning about December. During extreme Winters the river is closed to the mouth. The most difficult place below Winterport is abreast Fort Knox, where ice jams occur. If vessels can pass this point, they usually can go to Winterport. The river is kept open by an icebreaker, which prevents much of the damage that might otherwise be caused by ice and freshets. However, in recent years, according to local information, there has been very little ice and the river has seldom frozen over below Bangor. The brackish water formed by tidal action and the river current no doubt have contributed to this.

Freshets occur in the river during March and April; at times they are dangerous to vessels.

MAX. SIZE: At present ships of 560 ft. are taken up the river 2 hours before HW during daylight. Size and draft of ship depend on the berth.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Boston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Vessels arriving Bangor use radio station at Chatham Mass., or call on the R/T through station WOU at Boston, Mass.

TUGS: 4 tugs available up to 1,200 h.p. Tugs join at Belfast to assist in turning and berthing.

BERTHING:

Texaco Oil Co. Terminal: A timber pile, timber-decked pier, approximately 5,250 sq.ft., used for landing oil tankers. There are 8 storage tanks and 1 warehouse/office building with 1,920 sq.ft. of floor space.

Mobil Oil Co.: A timber crib pier approximately 8,500 sq.ft., used for landing tankers. There are 10 storage tanks and a garage at this facility.

Webber Terminal Inc.: A timber crib pier, approximately 2,340 sq.ft. used for landing tankers. Adjacent to this pier, there is another timber crib pier, approximately 5,280 sq.ft., also used for landing tankers. There are 2 storage tanks and a storage building with 480 sq.ft. of floor space.

Astroline Petroleum Corp. of Maine: There is a log filled bulkhead used for landing tankers. This facility includes 5 storage tanks and 1 tool shed.

Bangor Municipal Dock: 2 wooden floats with 2 ramps, approximately 600 sq.ft., used as a small boat landing. There is also a launch ramp that can only be used at high tide.

Gulf Oil Corp. – Brewer: A timber pile, timber-decked wharf; approximately 4,650 sq.ft., used for landing tankers.

Cities Service Oil Co. – Brewer: A log filled bulkhead used for landing tankers. There are 6 storage tanks and one combination storage/office building with 2,000 sq.ft. of floor space.

Webber Tanks Inc. – Brewer: A rock and timber crib, timber decked pier, approximately 7,200 sq.ft., used for landing tankers. There are 5 storage tanks and a warehouse with approximately 3,850 sq.ft. of floor area.

C. H. Sprague – Brewer-Orrington: A timber pile wharf, approximately 1,600 sq.ft., used for landing tankers. The wharf is in Orrington and fuel is pumped to 3 storage tanks located in Brewer. There is one building, a pump house, approximately 600 sq.ft.

Town Launch Ramp: Orrington. This is a paved launch ramp; no docking facilities. There is a 40-space (30 car – 10 trailer) gravel parking area.

BRIDGES: 1 suspension bridge below Bucksport with a height of 135 ft. at high water. Horizontal clearance is 750 ft.

The overhead power cable that crosses the river just above Bucksport has a clearance of 145 ft.

MEDICAL: No advance notice required. There are 3 large hospitals. Seamen required to have certificate for smallpox vaccination during past 3 years.

TANKERS: 1 berth for ocean-going vessels. 1 × 8 in. hose with a 10 in. line. 22 ft. at low water. Also see "Berthing".

DENSITY: Nearly fresh water.

FRESH WATER: Supplied at ocean-going berth at the rate of 50 t.p.h.

FUEL: Only available at oil berth.

CERTIFICATES:
Load-line.
Foreign Clearance.
Safety Certificate.
Radio Operator's Licence.

CUSTOMS ALLOWANCES: 200 cigarettes per man, 1 bottle wine/spirits per man.

IDENTIFICATION CARDS: Form 1–95 must be filled out upon arriving unless seaman has made one out before on a previous trip.

CONSULS: None.

REPAIRS: Only machinery repairs.

REPATRIATION: Arrangements must be made ahead of time by telegram.

TIME: GMT minus 5 hours in the Winter and minus 4 hours in the Summer.

AIRPORT: Bangor International is 2 miles from the city.

POLICE/AMBULANCE/FIRE: Police 9427377; Ambulance 9893311; Fire 9422293.

TELEPHONES: None put aboard. 1 pay phone on ocean-going berth.

SHORE LEAVE: Allowed subject to Immigration approval.

AUTHORITY: City of Bangor, Dept. of Harbour and Wharves, Harbour Master.

BATON ROUGE, Louisiana: 30.28 N. 91.12 W.

DOCUMENTS:
Original and 3 Crew Lists.
Original and 3 Passenger Lists.
Clearance from last foreign port.
Original and 3 copies Inward Manifest.
Certified Derat Certificate.
Load-line Certificate.
Safety Certificate.
Ship's Register.
3 copies Curio List.

PILOTAGE: Advise Agents ETA sea-buoy 48 hours in advance. Agent then makes arrangements for Pilots. Seven 46 ft. Pilot boats – red hulls white cabins, flying white and blue Pilot flags. Suggest Pilot ladder 6 ft. above water level, no life-line. Call Channel 2738 or VHF Channel 9, 30 to 40 miles out. Safe anchorage within 2 miles Southpass or S.W. pass entrance.

ANCHORAGES: General anchorage Baton Rouge as directed by Pilots.

RESTRICTIONS: No night-time restriction for entry or clearance, docking or undocking.

MAX. SIZE: Humble Oil Docks can accommodate 1,000 ft. vessels – unlimited breadth; draft governed by S.W. pass – project depth 40 ft. usually restricted from 37 ft. to 30 ft. draft May through August, due to low water and silting.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: ETA cables can be routed through Tropical Radio WNU New Orleans.

TUGS: Available at Baton Rouge for docking and undocking. Ship's lines used.

BERTHING: No time restrictions on berthing. 2 general cargo docks with total 280,000 sq. ft. transit shed and 2,265 ft. long, 40 ft. wide apron with double marginal tracks; grain elevator and bulk terminal at Burnside, for handling ores, concentrates, etc.; container marshalling yard adjacent cargo docks; also 20-acre paved staging area for import automobiles. Dock equipped for roll-on/roll-off. 1 dock equipped to handle liquid chemicals.

BULK HANDLING FACILITIES:

Grain: Cargill Grain Elevator: Max. draft 38 ft. Loading rate 1,000 t.p.h. Silo storage 160,000 tons.

Aluminium: Conalco-Burnside Terminal: 2 unloading gantries for bauxite. Rate 2,000 t.p.h. Max. draft 39 ft. Kaiser-Burnside Terminal: Same specifications as Conalco.

BRIDGES: Sufficient clearance for all stages of river at all times; 2 bridges cross at New Orleans, 1 at Baton Rouge and 1 at Donaldsonville.

STEVEDORES: May be obtained by Agent with 4 hours notice.

MEDICAL: Agents should receive 24 hours notice when medical attention is required. 2 excellent hospitals at Baton Rouge, U.S. Public Health Hospital at New Orleans.

TANKERS: Oil tankers load various petroleum and chemical products at Humble Oil Docks with sufficient hose, reducers, etc., available. Oil residue slop facilities available.

DENSITY: No tide – fresh water at all times.

FRESH WATER: At public docks, At Humble Oil Terminal simultaneous with loading or discharging at no cost. Ship's crew to make water connections.

FUEL: All grades subject inquiry. Barging essential.

FIRE PRECAUTIONS: Usual fire lines and sprinkler systems.

GANGWAY/DECK WATCHMEN: Only if Master requires.

OPENING/CLOSING HATCHES: Depending on terms of charter, usually by ship's crew.

CUSTOMS ALLOWANCES: Tobacco, each crew member allowed 300 cigarettes. Master allowed reasonable quantity. Wine and/or Spirit, each crew member allowed 1 bottle each of wine and spirits. Master allowed reasonable quantity.

CARGO GEAR: Safety certificate required for ship's gear in handling. Pkg. cargo, etc.

IDENTIFICATION CARDS: Usual passports.

CONSULS: Norwegian only, all other consuls at New Orleans – 80 miles distant.

REPAIRS: All types of deck and engine repairs may be carried out.

REPATRIATION: Crew repatriation and crew changes may be made.

AIRPORT: 6 miles to Ryan Airport, served by regular airlines.

TIME: Local time is Central Standard Time – 6 hours later than GMT; from April through October local time is CS daylight saving time, 5 hours later than GMT.

POLICE/AMBULANCE/FIRE: Tel. Nos. Public Dock: Police 343–5525; Ambulance 344–0566; Fire 343–4140.

TELEPHONES: No arrangements for placing telephones aboard.

GENERAL: Tankers in ballast advised of drift wood conditions in river and ballast their vessels accordingly so as to avoid propeller damage.

SERVICES: Because of restricted river inadvisable adjust compasses. This is usually accomplished below New Orleans where river of sufficient width to permit large vessels to swing. 2 firms engaged in tank cleaning, namely, Two Twenty Eight Terminals Inc. and Port Allen Marine Cleaning Plant. Slop facilities available at the Humble Oil & Refining Co. dock.

SHORE LEAVE: Shore leave permitted except when detained aboard by U.S. immigration.

DELAYS: Normally no delays at Humble Oil docks in berthing except when vessel's tanks unsuitable for loading. Normal delay at city wharf is 1 day awaiting berth.

AUTHORITY: Greater Baton Rouge Port Commission.

BAYTOWN: Texas: 29.44 N. 95.01 W.

DOCUMENTS, PILOTAGE, etc.: Refer to "Houston".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: Available if required.

BERTHING: Humble Oil & Refinery Co. Terminal, depth alongside 35 ft.
MEDICAL: All medical assistance available.
DENSITY: Brackish.
FRESH WATER: Available ex wharf.
FUEL: All grades available ex wharf.
GANGWAY/DECK WATCHMEN: Required only if crew detained by Immigration.
CUSTOMS ALLOWANCES: Each man 300 cigarettes or 100 cigars of 1 lb. tobacco; 1 quart wine/spirits.
AUTHORITY: Port of Houston Authority.

BEAUMONT, Texas: 30.05 N. 94.05 W.

DOCUMENTS, PILOTAGE, RADIO, etc., Refer to "Port Arthur".
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Meet vessel in Neches River before arriving at berth. Normally 2 tugs used for docking, 1 for undocking.
BERTHING: Beaumont Elevator, distance from sea 50 m., loading rate 1,500 t.p.h. depth alongside 38 ft. Texas Gulf Sulphur Co., distance from sea 47 m., depth alongside 34 ft.
CARGO HANDLING FACILITIES: 6 general cargo berths, with total of 520,000 sq.ft. transit shed space. 3 open berths with double marginal tracks; 700 ft. of gantry tracks with 60 ton travelling gantry crane. There is also a heavy duty 220 ton mobile crane and one derrick barge with lifting capacity of 500 tons, rental basis.
STEVEDORES: Normal working hours 0800/1200 and 1300/1700. Monday to Friday.
TANKERS: Mobil Oil Co., distance from sea 49 m., depth alongside 36 ft. Pan American Pet. Co., distance from sea 45 m., depth alongside 38 ft.

Sun Oil Terminal:
Report received 1975.
Operators: Sun Oil Co., Nederland, Texas.
Type of Terminal: Refinery. Handling Crude Oil & Lubs.
Density: Fresh water.
Distance from sea: 37.4 miles.
Controlling Depth: From channel to berth – 39–40 ft. Actual depth alongside – 40 ft.
Vertical clearance at High Water: 136 ft.
Max. length of berth facility: 150 ft.
Max. length of vessel to be moored safely: 900 ft. but that is absolute max. and normally prefer not more than 850 ft.
Hoses: 4 × 12 in. (Crude). 6 × 6 in. (Lubs).
Usual Loading Pumping Capacity: 60,000 bbls per hour (Crude). 2,000 bbls per hour (Lubs).
Usual Discharge Pumping Capacity: To vessel's capacity.
Fresh Water: Available on 24 hour basis.
Fuel: None.
Tugs: Per Pilot's requirements.
Anchorage: Max. draft 29 ft. (i.e. no anchorage facility for loaded ships).

MEDICAL: All facilities available.
DENSITY: Fresh water.
FRESH WATER: Available at berths, or by barge.
FUEL: Available ex-wharf at Mobil terminal. All grades available by barge to other locations.
GANGWAY/DECK WATCHMEN: Not required unless crewmen detained by Immigration.
CUSTOMS ALLOWANCES: 300 cigarettes and 1 quart wine/spirits for each man.
IDENTIFICATION CARDS: Foreign crew require only Immigration landing permit.
CONSULS: Nearest at Houston.
REPAIRS, DRY DOCKS: Beaumont's Bethlehem Shipyard offers all types ship repair or reconditioning – plus vessel conversion and jumboizing 2 side-launching ways over 800 ft. each. Floating dry dock with extreme length of 648 ft.; length on bottom 576 ft.; breadth at entrance, 87 ft.; and lifting capacity, 17,500 tons. Active in design and construction of mobile drilling platforms and oil and gas production and storage facilities for service off shore.
HOLIDAYS: Longshore holidays are: New Years Day: Martin Luther King's Birthday (January 15th); Lincoln's Birthday (February 12th); Washington's Birthday; Texas Independence Day (March 2nd); Good Friday; Memorial Day (last Monday in May); Emancipation Day (June 19th); Fourth of July; Labour Day; Columbus Day; Veteran's Day (November 11th); Thanksgiving Day; Christmas Day.
DEVELOPMENTS: 2 new 600 ft. berths; 1 shedded with 120,000 ft. transit warehouse space, 1 open with 17 acres back from shipside area now complete and in operation. 8 acres hard surfaced area, adjacent to ships side for containers, rolling stock or project cargo. The ports new 220 ton mobile crane will complement the new facilities.
AUTHORITY: Port Director, Port of Beaumont.

BELLINGHAM, Washington: 48.45 N. 122.31 W. (See Plan Book)

DOCUMENTS, PILOTAGE, etc.: Refer to "Tacoma".
HEALTH: See "Health; All Ports" before first U.S.A. Port (Albany). Illness reports made to Seattle Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Available, join vessel in Bellingham Bay.
ANCHORAGE: Deep water available, but not good holding ground.
BERTHING: North Terminal, Berths Nos. 1 & 2 length 1,500 ft., depth alongside 32 ft. MLLW. Berth No. 3 length 400 ft., depth alongside 30 ft. MLLW. Georgia Pacific Dock, Berthing length 600 ft., depth alongside 28 ft. MLLW.
CRANES: 2 × 50-ton capacity rail-mounted gantry cranes and 1 barge mounted 60-ton crane.
STEVEDORES: 8 local gangs. Additional gangs imported if required.
HOLIDAYS: See "Tacoma".
MEDICAL: All medical facilities available. Local hospital.
DENSITY: Salt water.
FRESH WATER: Available at all wharves.
FUEL: Available. Barge delivery only.
GANGWAY/DECK WATCHMEN: Required only if detainees aboard.
CUSTOMS ALLOWANCES: No definite quantities prescribed; reasonable allowance at discretion of Customs Inspector.
AIRPORT: 3 miles from the city.
AUTHORITY: Port Manager, Port of Bellingham.
AGENT: See "Seattle".

BENICIA, California: 38.03 N. 122.10 W. (See Plan Book)

DOCUMENTS: Health and all General Information: refer to "San Francisco".
PILOTAGE: Port located about 25 miles above Golden Gate Bridge. River Pilot joins at San Francisco, using VHF for traffic information. Passage includes passing under 2 bridges, Carquinez Strait Bridge having the least clearance, with 146 ft. (HW) and 151 ft. (LW) (using North Channel). River passage is timed to arrive at Benicia at the first of ebb tide; this is approximately 2.5 hours after HW at Fort Point (Golden Gate).
ANCHORAGE: At San Francisco.
RESTRICTIONS: Tankers must lighten to 36 ft. fresh-water draft. This is done at No. 7 anchorage, 1.5 miles East of Alcatraz Island. This cargo will later be pumped back to the tanker as barges cannot overcome shore back pressure. Turning basin off the berths, radius 1,800 ft.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to San Francisco Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: 1 small tug assists berthing. Only 1 normally required for unberthing.
BERTHING: Continuous wharf 2,404 ft. long with berth for 3 vessels. The West berth is used for the loading of petroleum products (Exxon), and the Centre and East berths are equipped for handling general and bulk cargoes. East of this facility is another berth that will accommodate one tanker for discharge of crude oil (Exxon) depth alongside – 38 ft.
MOORINGS: 2 head wires, 4 breasts and 2 springs forward. This is necessary because of current off the bank during ebb tide. 2 stern lines, 2 breast lines and 2 springs aft.
BULK HANDLING FACILITIES: Waterside silos capacity 26,000 tons. With loading conveyor belt capacity 1,000 t.p.h.
TANKERS: Crude oil discharge through 2 × 12-in. Chiksan arms and 36-in. shoreline, 2.5 miles long. Shore tanks are situated 164 ft. above sea level, initial back pressure 65/70 p.s.i.
FRESH WATER: Available from shore lines.
FUEL: Can only be delivered by barge. Averate rate 300 t.p.h.
DEVELOPMENTS: Current plans call for: (1) enlargement to 9 berths; (2) deepening of water alongside, including channels to 45 ft.; (3) installation of bulk handling equipment for wood chips; (4) for bulk iron ore and (5) development of a complete container terminal.
AUTHORITY: Benicia Port Terminal Company.
AGENT: See "San Francisco".

BOCA GRANDE, Florida: 26.43 N. 82.15 W.

SHIPMASTER'S REPORT: 1978

LOCATION: On the Eastern side of the Southern end of Gasparilla island, about 60 miles South of Tampa Bay.
DOCUMENTS: See "Tampa".

Government officials must travel from Tampa to Boca Grande at vessel's expense.

PILOTAGE: Compulsory for all foreign-going merchant vessels. The Pilot boards vessel near the sea buoy. Pilotage available 24 hours a day.

Request should be made to ship's Agents via Tampa Marine Operator. VHF Channels 16, 12 and 13.

ANCHORAGE: Good holding ground near the sea buoy (26° 39.8' N. 82° 19.6' W.)
RESTRICTIONS: The channel is less than 300 ft. wide in some places. The traffic is one way and vessels enter only when the stream is half strength or less. Strong Westerly winds may cause a swell which prevents vessels using the channel.
MAX. SIZE: Beam: 80 ft. with 24 ft. maximum distance from outside ship's hull to inside hatch coaming.

Draft: 31 ft. 6 in. (9.60 m.) recommended by Pilots. The channel is 32 ft. deep at MLW.

Length: 550 ft. should be a maximum because distance between end bollards is 475 ft.

HEALTH: Same procedure as for any other U.S. port.

A U.S. Public Health physician is located on the island.

RADIO: Tampa Radio – WPD.

TUGS: A small tug for light towing operations is available.

BERTHING: A "T"-headed pier 325 ft. long; distance between end bollards: 475 ft. This pier is for loading phosphates in bulk. Max. draft: 32 ft. (SW). An oil handling berth with 33 ft. depth is located close Southward of the phosphate pier.

BULK CARGO: Material loaded: Phosphate Rock, Diammonium Phosphate, Triple Super Phosphate (granulated or run of pile) and Defluorinated Phosphate.

The shiploader travel is only 270 ft. so large vessels must shift alongside.

Maximum height of vessel: 34 ft. (10.36 m.) from the water line (MLW) to the rail or the hatch-coaming.

Trimming: Spout trimming is done free of charge. Mechanical trimming (levelling and/or filling) will be performed by the railroad at additional charge.

Loading Rates: Phosphate Rock: about 800 t.p.h spout trimmed.
Diammonium phos.: about 400 t.p.h. spout trimmed.
Triple S. Phos.: about 550 t.p.h. spout trimmed (granulated).
Triple S. Phos.: about 300–500 t.p.h. spout trimmed (run of pile).
Defluor. Phos.: about 400 t.p.h. spout trimmed.
when levelling and/or filling is required, loading rates are much lower and extremely variable depending on the construction of the ship.

Work Schedule: Only one work crew is available; therefore, only about 16 hours working time per day and about 8 hours rest period for crew.

Work performed without overtime charge to the shipper 7 days a week except following, no work holidays: Jan. 1st, July 4th, Labour Day, Christmas Day.

TIDES: Approximately 2 ft. variation.

DENSITY: Salt water.

FRESH WATER: Available at phosphate loading berth.

FUEL: No local facilities. Prior arrangements with ample notice must be made via the ship's Agent at Tampa.

CONSULS: See "Tampa".

REPAIRS: No local facilities. To be arranged via Agents with ample notice.

SURVEYORS: The nearest Lloyds' office is at Jacksonville. American Bureau available from Tampa.

STORES AND PROVISIONS: No facilities available for normal ship chandlering. Prior arrangements should be made via Tampa.

GENERAL: Boca Grande is the older of "Seaboard Coast Line's" (SCL) two existing loading facilities, the new one being at Tampa. All Agents are based at Tampa, about 110 miles by road.

BOSTON, Massachusetts: 42.21 N. 21.05 W. (See Plan Book)

DOCUMENTS:
- 3 copies Cargo Manifest (Forms 7527–A or 7527–B), 2 copies showing all cargo on board, and 1 copy showing only cargo for this port.
- 3 copies Crew Manifest (Form 1304).
- 3 copies Stores List (Form 1303).
- 3 copies Passenger List (Form I.–418).
- 3 copies Crew List (Form I.–418).

Customs boarding officer will also examine Ship's Register, Safety Equipment Certificate and Load-line Certificate. In addition, the following documents will be required for formal entry to be made within 48 hours of arrival from abroad, or 24 hours from arrival from a United States Port:
- General Declaration (Form 1301).
- Health Pratique.
- Master's Oath (Customs Form 1300).
- All foreign clearances.
- Certificate of Financial Responsibility (Oil Pollution).
- U.S. Certificates of payment of tonnage tax (Customs Form 1002).
- Certified Crew List.

PILOTAGE: Is compulsory. Pilots cruise in boats which are designated by numbers painted in black figures 4 ft. high on deckhouse. The outer boat cruises outside the Graves.

ANCHORAGES: ANCHORAGE No. 1.

Upper Harbour Anchorage: Steam and motor vessels permitted to anchor in this basin anchor within the following area: S.E. of a line bearing 205° true from N.E. corner of Boston and Albany Pier No. 5, East Boston; N.E. of a line bearing 122° true from S.E. corner of Lewis Wharf, North Pier; S.W. of a line bearing 292° true from N.E. corner of Southernmost Airport Approach Pier; N.W. of a line bearing 025° true from Buoy No. 12, Fl.R.6 sec.

ANCHORAGE No. 2. *President Roads Anchorage* (40 ft. anchorage): All vessels anchoring in this basin anchor within an area beginning at a point bearing 237°, 522 yards from Deer Island Light; thence to a point bearing 254°, 2,280 yards from Deer Island Light; thence to a point bearing 261°, 2,290 yards from Deer Island Light; thence to a point bearing 279°, 2,438 yards from Deer Island Light; thence to a point bearing 319°, 933 yards from Deer Island Light; thence to a point bearing 319°, 666 yards from Deer Island Light; and thence to point of beginning.

President Roads Anchorage: (35 ft. anchorage): All vessels anchoring in this basin anchor within an area beginning at a point bearing 256°, 2,603 yards from Deer Island Light; thence to a point bearing 258°, 3,315 yards from Deer Island Light; thence to a point bearing 264°, 3,967 yards from Deer Island Light; thence to a point bearing 261°, 2,290 yards from Deer Island Light; and thence to point of beginning.

ANCHORAGE No. 3. *Nantasket Roads Anchorage:* Vessels anchoring in this anchorage basin anchor within following area: Westerly of a line bearing 143° from wharf at Gallups Island to Bell Buoy No. 2, S.W. of Georges Island; Northerly of a line bearing 260° from Bell Buoy No. 2, Georges Island, to the Northerly end of Rainsford Island; Northerly of a line bearing 273° from the Northerly end of Rainsford Island to Bass Point, Long Island; Southerly of a line bearing 270° from the wharf at Gallups Island to Long Island.

ANCHORAGE No. 5. *Peddocks Island and Explosive Anchorage:* Vessels anchoring in this anchorage basin anchor within following area; S.W. of a line bearing 122° true from the Easterly end of Rainsford Island to the N.E. end of Rainsford Island to the N.E. end of Peddocks Island, N.E. of a line bearing 165° true from the Westerly end of Rainsford Island to the S.E. end of Peddocks Island.

RESTRICTIONS: There are 3 main channels of entrance from sea to President Roads.

Broad Sound North Channel from Broad Sound to President Roads from N.E. Dredged 35 ft.. deep and 1,500 ft. wide and is deepened to 40 ft. in a width of 900 to 1,100 ft. This channel well marked by lighted buoys.

Broad Sound South Channel from Broad Sound S.W. and Westerly to President Roads. Dredged 30 ft. deep and 1,200 ft. wide. This channel is well marked by buoys and ranges but most aids to navigation are not lighted.

The Narrows is channel leading into Boston Harbour from S.E. between Boston Lighthouse and Lovells Island on the N.E. and Point Allerton, Georges Island and Gallups Island on S.W. Depth is 27 ft. Width is generally 1,000 ft. except in a section between Narrows Light and Georges Island where shoaling on N.E side limits it to 700 ft. Channel is well marked.

The Main Ship Channel of Boston Harbour extends from President Roads to the mouths of the Chelsea and Mystic Rivers and to Charlestown Bridge on the Charles River. Channel has been dredged 35 ft. deep and 1,200 ft. wide to the inner end where widths decrease near the river mouths. It has been deepened to 40 ft. for 600 ft. width from President Roads to the mouth of the Mystic River, with a widening to 1,200 ft. at the bend just Northerly of Commonwealth Pier No. 5, South Boston.

Charles River is the approach by water to Cambridge and Watertown. About 0.5 mile above the lower bridge there is a dam with a lock 45 ft. by 350 ft. with depth of 17 ft. over the lower sill. Depths above dam decrease gradually to 9 ft., basin level, at head of navigation. *Mystic River* is approach by water to Everett, Malden and Medford. Controlling depths are 35 ft., from Mystic River bridge to approximately 1 mile above, thence 20 ft. from the 35 ft. channel to 800 ft. above the Malden Bridge to a point abreast Monsanto Chemical Company plant. *Chelsea River* is approach to city of Revere. Channel from entrance to a point opposite the Tenneco Oil Co. terminal has a controlling depth of 35 ft. *Weymouth Fore River* is approach by water to Quincy and Weymouth. Controlling depth is 30 ft. to Fore River Bridge. Controlling depth for a distance of 2,800 ft. above Fore River Bridge is 30 ft. *Town River* extends N.W. from Weymouth Fore River at Quincy Point. River has a controlling depth of 27 ft. from deep water in Weymouth Fore River to a point opposite the Quincy Oil Co.. terminal. Opposite Quincy Oil Co terminal there is a turning basin 18 ft. deep, 400 ft. wide and 1,000 ft. long.

MAX. SIZE: The primary entrance to Boston Harbour is via the North Channel and President Roads. Controlling depth is 35 ft. MLW. Average rise of the tide in Boston is 9.5. ft.

Generally speaking, vessels drawing 40 ft. are taken at the top of the tide to White Fuel and Exxon only. Vessels going to berths in the Mystic River above the Mystic River Bridge are limited by the bridge's vertical clearance of 135 ft. MHW.

Vessels consigned to berths in the Chelsea Creek are limited to a length of 669 ft., beam of 90 ft. and draft of 36 ft. high water docking. Furthermore, vessels which exceed 630 ft. going above the Chelsea Street Bridge are restricted to daylight docking. Daylight sailing is required from the berths above the McArdle Bridge if the vessel is over 585 ft. long.

As a rule, vessels are docked bow in at the Chelsea Creek berths. If docked between the bridges, departure is stern first through the McArdle Bridge. If docked above the Chelsea Street Bridge, then on sailing, the vessel is turned in the basin West of the Gibbs and Union terminals.

The controlling depth in the channel leading to Weymouth Fore River is 28 ft. MLW. Vessels with a max. draft of 33 ft. 6 in. will be taken at high water, but it should be noted that docking and undocking in Fore River are daylight operations – between sunrise and sunset – and no vessel longer than 628 ft. will be handled.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Boston Quarantine Station.

RADIO: *Advance Notice of Arrival:* 24 hours advance notice of arrival be given. This notice is made to the office of the Captain of the Port – 223-6979.

The information to be provided consists of: Vessel's Agent's name; Vessel's name, type, flag, and call sign; the ETA; Berth; Last port and next port; Dangerous cargo on board. In return the

Captain of the Port will assign a consecutive log number to the vessel.

In event the vessel's ETA is changed by more than 24 hours from first notice, the Captain of the Port should be so notified, identifying the vessel by its assigned log number.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: Steamers can proceed from the sea to Boston Upper Harbour under own power. They are usually met by tow-boats, for docking while in the stream. Barges usually left by the outside tow-boats at the anchorage grounds, to be docked later by harbour tugs.

BERTHING: There are 259 piers or wharves in the port of Boston providing 158,646 lineal ft. or 30 miles of berthing space measured along the sides and ends of piers and along bulkheads or shore wharves. Many of them have railroad connections. The depths of water available alongside these terminals range up to a maximum of 40 ft. at mean low water. Practically all terminals fronting on main ship channel are in close proximity to storage warehouses, both cold and dry which greatly facilitates transfer of cargo between vessel and warehouse.

Main Terminals:

Hoosac Pier, 3 berths	depth alongside 35 ft.
Mystic Pier, 4 berths	depth alongside 40 ft.
Commonwealth Pier, 5 berths	depth alongside 40 ft.
South Boston, 10 berths	depth alongside 35 ft.
Castle Island, 7 berths	depth alongside 35 ft.
East Boston, 3 berths	depth alongside 32 to 35 ft.
Public Container Terminal, 2 berths	depth alongside 40 ft.

Sea-land Container Terminal, South Boston (Berth 17, Castle Island):

Operator – Sea-Land Service, Inc. Tel. 268-9720.

Type of Pier – Single face, 500 ft. long 1×27.5 ton container crane. 10 acre container storage area.

Depth Alongside at MLW – 35 ft.

Normal ship side to dock – Starboard.

Line handling boat – not required.

Access to vessel (for stores and repairs) – trucks to ship's side.

Products handled – Containers.

Castle Island Terminal, South Boston:

Operator – Massachusetts Port Authority. Tel. 482-2930

Type of Pier – Single face. 6 berths No. 16 (610 ft.) adjacent to and extending N.W. of No. 17 (see above); No. 15 to No. 11 (2,995 ft.) adjacent to and extending Westward of No. 16. 294,000 sq.ft. covered storage, 4 million sq.ft. open storage (including 32 acres fenced in automobile storage and 20 acres lumber storage), 50 ton crane, rail service.

Depth Alongside at MLW – 35 ft.

Normal ship side to dock – Varies.

Line handling boat not required.

Access to vessel (for stores and repairs) – trucks to ship's side. Min. 40 ft. apron.

Products handled – General cargo, containers, lumber, bulk salt and cement, automobiles, petroleum products (at berth No. 11 for White Fuel).

White Fuel Company, South Boston:

Operator – Texaco, Inc. Tel. 269-2111.

Type of Pier – Single face.

Depth Alongside at MLW – 40 ft.

Normal ship side to dock – Port (bow in).

Line handling boat – required.

Access to vessel (for stores and repairs) – limited, trucks can approach only to within 150 ft. of gangway or ship's side.

Products handled – Avjet, Heating Oil, No. 6 Oil, Molasses.

Size and number of pipe-lines – Numerous – 24 in., 20 in., 16 in., 12 in.

Bbls per hour discharge capacity –12,000 to 18,000.

Average distance to storage tanks – 1,000 ft.

Pollution control equipment – 1,600 ft. boom, 16 ft. boat, 300 absorbent pillows, 2,000 gal. pumpout truck.

Eastern Minerals, South Boston:

Operator – Eastern Minerals, Inc. Tel. 269-5857

Type of Pier – Single face.

Depth alongside at MLW – 40 ft.

Normal ship side to dock – Starboard (bow out).

Line handling boat not required.

Access to vessel (for stores and repairs) – trucks to ship's side.

Products handled – bulk salt, pumice. Discharge rate 5,000 tons per day with fixed grab requiring vessel to be shifted in berth.

Boston Army Base, South Boston:

Operator – Port Terminals, Inc. Tel. 542-7100.

Type of Pier – Single face, three sides: South 3,705 ft., East 351 ft. North 964 ft., 950,000 sq.ft. covered storage, rail service, 2×27.5 ton rail mounted cranes.

Depth Alongside at MLW – 35 ft.

Normal ship side to dock – Varies.

Line handling boat not required.

Access to vessel (for stores and repairs) – trucks to ship's side. 50 ft. apron incorporates rail lines.

Products handled – General cargo, containers.

Commonwealth Pier, South Boston:

Operator – Massachusetts Port Authority. Tel. 482-2930.

Type of Pier – Single face, three sides: North and South 1,200 ft. East 400 ft. 500,000 sq.ft. covered storage, 1 million cu.ft. freezer, rail service, passenger lounge, upper level exhibition hall.

Depth Alongside at MLW – 40 ft.

Normal ship side to dock – Varies.

Line handling boat not required.

Access to vessel (for stores and repairs) – trucks to ship's side. 20 ft. apron incorporates rail lines.

Products handled – Passengers, general cargo, refrigerated cargo, bulk tallow.

Pier 1, East Boston:

Operator – Massachusetts Port Authority Tel. 482-2930.

Type of Pier – Single face, three sides: East and West 605 ft. South 390 ft. 196,0000 sq.ft. covered storage.

Depth Alongside at MLW – 35 ft.

Normal ship side to dock – Varies.

Line handling boat not required.

Access to vessel (for stores and repairs) – trucks to ship's side.

Products handled – General cargo, containers.

Metropolitan Petroleum Company, Chelsea:

Operator – Metropolitan Petroleum Company. Tel. 288-1111

Type of Pier – Timber pile, offshore.

Depth Alongside at MLW – 35 ft.

Normal ship side to dock – Starboard (bow in).

Line handling boat not required.

Access to vessel (for stores and repairs) – by hand cart only.

Products handled – Heating Oil, No. 6 Oil.

Size and number of pipe-lines – 2 × 8 in.

Bbls per hour discharge capacity – 6,000 to 8,000.

Storage tanks adjacent to berth.

Pollution control equipment – 1,000 ft. boom, 18 ft. boat, 50 absorbent pillows, 150 gals. Aqua-clene.

Note:– Bow to manifold 370 ft. No wire ropes used to moor vessel.

Exxon Company U.S.A., Everett:

Operator – Exxon Company U.S.A. Tel. Marine Department 387-1733, Marketing Terminal 389-7400.

Type of Pier – Timber pile wharf with caissons.

Depth alongside at MLW – 40 ft.

Normal ship side to dock – Starboard.

Line handling boat not required.

Access to vessel (for stores and repairs) – by rail-mounted hand cart.

Products handled – Asphalt, Chemicals, Diesel Oil, Jet Fuel, L.P.G., Kerosene, Gasoline, No. 2 and No. 6 Oil.

Size and number of pipe-lines – numerous.

Bbls per hour discharge capacity – Up to 35,000.

Average distance to storage tanks – 5,000 ft.

Pollution control equipment – 1,500 ft. boom, skiff.

Prolerized New England, Everett:

Operator – Prolerized New England Company. Tel. 389-8300.

Type of Pier – Straight face.

Depth alongside at MLW – 37 ft.

Normal ship side to dock – Port (bow out).

Access to vessel (for stores and repairs) – trucks to ship's side, but access may be limited due to vessel's position at conveyor.

Products handled – Ferrous scrap (including Prolerized shredded-scrap).

General notes: Pier is equipped with 2×40-ton cranes. Shredded scrap is loaded from fixed conveyor requiring vessel to be shifted as each hatch is served.

This berth is also used by Distrigas Corp. and Union Carbide Corp.

American (Domino) Sugar Refinery, Charlestown:

Operator – Amstar Corporation. Tel. 242-3670.

Type of Pier – Single face.

Depth Alongside at MLW – 33ft.

Normal ship side to dock – Port (bow in).

Line handling boat required.

Access to vessel (for stores and repairs) – trucks to ship's side, but may be limited depending on vessel's position at conveyor.

Products handled – raw sugar. Discharge facility consists of single grab with capacity of 200-250 t.p.h. Vessels limited to approximately 650 ft. overall length.

Revere Sugar Refinery, Charlestown:

Operator – Sucrest Corporation. Tel. 242-2750.

Type of Pier – Straight face.

Depth Alongside at MLW – 33 ft.

Normal ship side to dock – Port (bow in).

Line handling boat not required.

Access to vessel (for stores and repairs) – trucks to ship's side.

Products handled – raw sugar. Discharge facility consists of 23.5 ton grabs with total capacity of 350-400 t.p.h. Vessels limited to approximately 600 ft. overall length.

Mystic Scrap Terminal, Charlestown:

Operator – Schiavone Terminal, Inc. Tel. 242-5210.

Type of Pier – Single face.

Depth Alongside at MLW – 35 ft.

Normal ship side to dock – Owner's preference.

Line handling boat not required.

Access to vessel (for stores and repairs) – trucks to ship's side.

Products handled – Ferrous scrap.

General notes: Pier is equipped with 3×14-ton Clyde gantry cranes. Loading rate 2,500 tons per day. Rail service to pier.

J. F. Moran Container Terminal, Charlestown:
Operator – Massachusetts Port Authority. Tel. 482-2930.
Type of pier – Single face, 1,100 ft. long. 1×45-ton container crane, 1×70-ton container crane, 38,000 sq.ft. container stuffing shed, 30 acre container storage area, rail service.
Depth alongside at MLW – 40 ft. MLW.
Normal ship side to dock – Varies.
Line handling boat not required.
Access to vessel (for stores and repairs) – trucks to ship's side.
Products handled – Containers.

U.S. Gypsum, Charlestown:
Operator – U.S. Gypsum Co. Tel. 241-9100.
Type of Pier – Single face.
Depth alongside at MLW – 23 ft.
Normal ship side to dock – Port.
Line handling boat not required.
Access to vessel (for stores and repairs) – No access to berth.
Products handled – Gypsum rock from Nova Scotia, carried in company's own vessels, specially fitted and adapted for discharge at this berth.

Mobil Oil, East Boston:
Operator – Mobil Oil Corporation. Tel. 567-9080.
Type of Pier – Straight face, with centre relieving platform.
Depth Alongside at MLW – 30 ft.
Normal ship side to dock – Starboard.
Line handling boat required.
Access to vessel (for stores and repairs) – trucks to ship's side.
Products handled – Gasoline, Heating Oil.
Size and number of pipe-line – Various.
Bbls per hour discharge capacity – 8,000.
Average distance to storage tanks – tank farm adjacent to berth.
Pollution control equipment – 950 ft. boom.

Gibbs Oil Company, Revere:
Operator – Gibbs Oil Company. Tel. 289-7700.
Type of Pier – Timber pile, wooden deck.
Depth Alongside at MLW – 35 ft.
Normal ship side to dock – Starboard.
Line handling boat not required.
Access to vessel (for stores and repairs) – only by handcart.
Products handled – Heating Oil, Gasoline.
Size and number of pipe-lines – 3×10 in., 2×12 in.
Bbls per hour discharge capacity – 8,000 per line.
Average distance to storage tanks – 2,500 ft.
Pollution control equipment – 1,750 ft. boom, 16 ft. boat. (shared with Union, Gulf, Northeast.)

Union Oil Company, Revere:
Operator – Union Oil Company. Tel. 284-4490.
Type of Pier – Timber pile, wooden deck.
Depth Alongside at MLW 33 ft.
Normal ship side to dock – Port.
Line handling boat required.
Access to vessel (for stores and repairs) – only by handcart.
Products handled – Heating Oil, Mogas, No. 5 Oil, No. 6 Oil,
Size and number of pipe-lines – 5×12 in.
Bbls per hour discharge capacity – 8,000 per line.
Average distance to storage tanks – 2,500 ft.
Pollution Control equipment – 1,750 ft. boom, 16 ft. boat. (shared with Gibbs, Gulf, Northeast).

Gulf Oil Company, Chelsea:
Operator – Gulf Oil Company. Tel. 884-5980.
Type of Pier – Single face.
Depth Alongside at MLW – 26 ft.
Normal ship side to dock – Port.
Line handling boat not required.
Access to vessel (for stores and repairs) – Trucks to ship's side.
Products handled – Heating Oil, Gasoline.
Size and number of pipe-lines – 5×12 in.
Bbls per hour discharge capacity – 8,000 per line.
Average distance to storage tanks – 1,000 ft.
Pollution control equipment – 1,750 ft. boom, 16 ft. boat. (Shared with Gibbs, Northeast, Union.)

American Oil, Chelsea:
Operator – Northeast Petroleum Corp. Tel: Office – 884-7570; Terminal – 884-7577.
Type of Pier – Timber pile dolphins, wooden decked parallel to single face abutment.
Depth Alongside at MLW – 35 ft.
Normal ship side to dock – Port (bow upstream).
Line handling boat required.
Access to vessel (for stores and repairs) – Trucks to ship's side.
Products handled – Gasoline, Kerosene, Heating Oil, No. 6 Oil.
Size and number of pipe-lines – 8 in., 10 in., 14 in., depending on product.
Bbls per hour discharge capacity – Up to 13,000 depending on product.
Average distance to storage tanks – 2,500 ft.
Pollution control equipment – 1,750 ft. boom, 16 ft. boat. (Shared with Union, Gibbs, Gulf.)

Texaco, Chelsea:
Operator – Texaco, Inc. Tel. Terminal 884-7000, Offices 269-2111.
Type of Pier – Single face.
Depth Alongside at MLW – For 575 ft. vessels: 31 ft. fwd., 34 ft. aft.
For 624 ft. vessels: 21 ft. fwd., 34 ft. aft.
Normal ship side to dock – Port.
Line handling boat not required.
Access to vessel (for stores and repairs) – trucks to ship's side.
Products handled – Avjet, Diesel Oil, Gasoline.
Size and number of pipe-lines – 7×12 in.
Bbls per hour discharge capacity 5,000 to 10,000.
Average distance to storage tanks – Tank Farm adjacent to berth.
Pollution control equipment – Automatic boom being installed.

Quincy Oil, Quincy:
Operator – Quincy Oil Company. Tel. 773-2500.
Type of Pier – Timber pile, timber deck, offshore wharf.
Depth Alongside at MLW – 29ft.
Normal ship side to dock – Port.
Line handling boat not required.
Access to vessel (for stores and repairs) – by hand cart only.
Products handled – Gasoline, Heating Oil.
Size and number of pipe-lines – 2×8 in.
Bbls per hour discharge capacity – 6,000.
Average distance to storage tanks – Tank Farm adjacent to berth.
Pollution control equipment – 800 ft. boom, workboat.

Mobil Oil, Quincy:
Operator – Mobil Oil Corporation. Tel. 773-7080.
Type of Pier – T-head with dolphins.
Depth Alongside at MLW – 30 ft.
Normal ship side to dock – Starboard.
Line handling boat not required.
Access to vessel (for stores and repairs) – trucks to ship's side.
Products handled – Gasoline, Heating Oil.
Size and number of pipe-lines – Various.
Bbls per hour discharge capacity – 8,000.
Average distance to storage tanks – Tank Farm adjacent to berth.
Pollution control equipment – shared with Sprague.

C.H. Sprague & Son Co., North Weymouth:
Operator – C.H. Sprague & Son Co. Tel. Terminal 337-2040, Offices 542-7807.
Type of Pier – Timber pile, concrete deck.
Depth Alongside at MLW – 35 ft. 6 in.
Normal ship side to dock – Starboard.
Line handling boat not required.
Access to vessel (for stores and repairs) – trucks to ship's side.
Products handled – No. 6 Oil.
Size and number of pipe-lines – 2×12 in.
Bbls per hour discharge capacity – 10,000 per line.
Average distance to storage tanks – 2,500 ft.
Pollution control equipment – 500 ft. boom, 16 ft. boat (shared with Mobil).

Cities Service Oil Company, Braintree:
Operator – Cities Service Oil Company. Tel. 848-1100.
Type of Pier – 4 cylindrical caissons.
Depth Alongside at MLW – 34 ft.
Normal ship side to dock – Starboard.
Line handling boat not required.
Access to vessel (for stores and repairs) – trucks to ship's side.
Products handled – Heating Oil, Gasoline.
Size and number of pipe-lines – 1×10 in., 4×12 in.
Bbls per hour discharging capacity – 10,000.
Average distance to storage tanks – 2,500 ft.
Pollution Control Equipment – 1,500 ft. boom, work boat.

Bulk Cement Piers:
There are 2 berths in Boston used exclusively for the discharge of bulk cement from barges. Both are in the Mystic River.

No. 28: Allied Concrete Corp. Telephone. 389-2800. This berth is leased to: Marquette Cement Manufacturing Co. Telephone. 235-8006.

No. 33: Atlantic Cement Company, Inc. Telephone. 241-9090.

Meat Inspection Station: The Massachusetts Port Authority operates a meat inspection station on Mystic Pier (No. 38) adjacent to the Moran Container Terminal.

Random incoming meat samples are cut, defrosted, weighed, inspected, and re-frozen at this new facility, enabling inspectors to use one central location instead of the 5 other waterfront stations previously utilized.

The chief component of the building is the large, well-lighted, well-ventilated, and sanitary inspection room. Walls are ceramic tile, the floor has quarry tile, and the ceiling is of acoustical tile.

Up to 50 containers of meat a day will be inspected at this modern facility.

SPECIALISED CARGO HANDLING FACILITIES: Also see "Berthing".

	Location	Depth at MLW
Bulk Cement		
Atlantic Cement Company	Charlestown	29 ft.
Marquette Cement MFG. Company	Everett	20 ft.
Universal Atlas Cement Company	South Boston	25 ft.
Chemicals and Solvents		
Union Carbide Corp.	Everett	36 ft.
General Cargo Terminals		
East Boston Pier (3 berths)	E. Boston	35 ft.
Mystic Pier (4 berths)	Charlestown	40 ft.
Hoosac Pier (3 berths)	Charlestown	35 ft.
Commonwealth Pier (5 berths)	S. Boston	40 ft.

Boston Army Base Terminal (10 berths)	S. Boston	35 ft.
Castle Island Terminal (7 berths)	S. Boston	35 ft.
Container Terminals		
JF Moran Docks (2 berths)	Charlestown	40 ft.
Sea-Land Services Inc. (1 berth)	S. Boston	35 ft.
Gypsum Rock		
U.S. Gypsum Company	Charlestown	24 ft.
Sulphur		
Freeport Mineral Company	Everett	36 ft.
Iron and Steel Products		
Boston Army Base Terminal (1 berth)	S. Boston	35 ft.
Raw Sugar		
American Sugar Co.	Charlestown	30 ft.
Revere Sugar Refinery	Charlestown	30 ft.
Salt (Sodium Chloride) and Pumice		
Eastern Minerals Inc.	S. Boston	35 ft.
Castle Island Terminal, Berth II	S. Boston	35 ft.
Scrap Metal		
Prolerized N.E. Co.	Everett	36 ft.
Schiavone & Sons Inc.	Charlestown	34 ft.
Vegetable Oils, Liquid Caustic Soda, etc.		
Procter & Gamble MFG Co.	Quincy	30 ft.
Animal Oils Greases and Fats (Tallow)		
Commonwealth Pier 5 (Corenco)	S. Boston	40 ft.
Automobiles		
Castle Island Terminal Berth 16	S. Boston	35 ft.
East Boston Pier I	E. Boston	35 ft.
Commonwealth Pier 5	S. Boston	40 ft.
Lumber		
Castle Island Terminal Berth II	S. Boston	35 ft.
L.N.G. Terminals		
Distrigas	Everett	36 ft.

TANKERS: Also see "Berthing".

Tanker Berths	*Location*	*Depth at MLW*
State Fuel Co. Inc.	E. Boston	29 ft.
Mobil Oil Corp.	Quincy	35 ft.
Mobil Oil Corp.	E. Boston	30 ft.
Gibbs Oil Company	Revere	35 ft.
Atlantic Richfield Company	Revere	35 ft.
Sun Oil Company	Revere	30 ft.
Northeast Petroleum Corp.	Chelsea	32 ft.
Northeast Petroleum Corp.	Revere	30 ft.
Union Oil Company of Boston	Revere	30 ft.
Gulf Oil Corp.	Chelsea	31 ft.
American Oil Company	Chelsea	32 ft.
Cities Service Oil Co.	Braintree	35 ft.
Cities Service Oil Co.	Chelsea	30 ft.
Texaco Oil Inc.	Chelsea	35 ft.
Quincy Oil Co.	Quincy	32 ft.
Metropolitan Petroleum Co.	Chelsea	35 ft.
Exxon	Everett	42 ft.
White Fuel Oil Co.	S. Boston	40 ft.

LNG/LPG: Presently there are 2 facilities in Boston Harbour which handle LNG (Liquid Natural Gas – methane). Boston Gas at Commercial Point, Dorchester, Mass., and Distrigas on the Mystic River, Everett, Mass., have storage capabilities for LNG.

The Exxon Everett facility receives and stores LPG (Liquefied Propane Gas).

The Captain of the Port (COPT) has issued very specific requirements for vessels transitting the harbour and transferring cryogenic cargoes. The Coast Guard team consisting of Port Safety Station, representing the Captain of the Port, and Marine Inspection Office boarding officers and the men assigned to the escort and monitoring details are charged with the responsibility for insuring compliance with these regulations which are detailed in the 60-page LNG/LPG Contingency Plan issued by the Captain of the Port. Included in the plan are the following General Regulations:

The vessel must:

(1) Hold a current Letter of Compliance for the carriage of methane/propane issued by the Commandant and a Certificate of Financial Responsibility for Oil Pollution.

(2) Enter the harbour only during daylight hours. Additionally, vessels transitting Dorchester may only do so within 2 hours of high water. Weather permitting, the COTP may authorize night departures providing the vessel does not have a full or partial cargo.

(3) Enter the harbour only during periods of good visibility. If the visibility is less than 2 miles the vessel must:

(i) If at sea, not enter the port without the COTP's permission.

(ii) If in port, notify COTP of position and then proceed to berth or anchorage, whichever nearer.

(4) Maintain a radio watch on Channel 13 (156.65 mHz) while underway in the port area. Additionally, a watch should be maintained on Channel 16 (156.8 mHz).

(5) Not commence offloading cargo prior to the satisfactory completion of the arrival safety inspection by Coast Guard Marine Inspectors and the issuance of the Permit to Handle Explosives or Other Dangerous Cargo (CG Form 4260).

Additionally:

(1) The vessel must moor either bow to seaward and be prepared to get underway on short notice, should an emergency so require, or have a tug standing by during all cargo operations. A tug standby will be required on a vessel's first visit to this port.

(2) The vessel will normally be boarded while anchored in President Roads by COTP/OCMI Inspectors unless, prior to the vessel's arrival, the Master sends a message to COTP stating that: "To the best of my knowledge and belief there are no known casualties to this vessel or its machinery which might affect the seaworthiness. I further state that all cryogenic handling and detection equipment is in proper operating condition."

If this message has been received, the inspection will be made at the dock unless it is the vessel's first visit to Boston. On a vessel's first visit to Boston the boarding will always be made in President Roads. If the vessel does not hold a Letter of Compliance the boarding will be made in Broadsound and the vessel will not be allowed to enter the port until a temporary Letter of Compliance is issued.

(3) Venting gas to the atmosphere is not permitted in port.

(4) All cargo operations must cease if electrical storms are present.

(5) If interpreters are not available, all ship's personnel directly involved in the transfer operation shall readily speak the English language.

(6) If the vessel is at anchorage a live bridge watch shall be maintained. A round of bearings fixing the vessel's position shall be taken hourly followed by a report, every 4 hours, to USCG Group Boston on Channel 16 FM reporting anchor holding and operations normal or any significant change in position or deviation from the norm.

Also, whenever an LNG/LPG vessel is transitting Boston Inner or Outer Harbour (to the seaward entrance of the Boston North Channel) no other vessel will be allowed to be underway in an area 2 nautical miles ahead and 1 nautical mile astern of the LNG/LPG vessel in transit. This concept can be thought of as a "moving restricted area" centred on the LNG/LPG vessel. For vessel movement in an area of the Port other than that described above, express permission from COTP Boston must be obtained.

Furthermore, the maximum allowable speed for any vessel movement during an LNG/LPG vessel transit, will be 6 knots. A Coast Guard escort craft will always be present during an LNG/LPG vessel transit and will vigorously enforce these vessel movement restrictions. The maximum penalty for violation of any of the rules established under the above authority is imprisonment for not more than 10 years and a fine of not more than $10,000.

It should be noted that these rules establishing a restricted envelope around the LNG/LPG vessel and the 6 knot speed limit apply not only to other vessels but to the LNG/LPG vessel itself. Therefore, the LNG/LPG vessel may not approach any closer than 2 nautical miles to another vessel underway, thus eliminating a possible collision should another vessel lose steerage or suffer a casualty. These rules prohibit crossing, meeting or overtaking situations from occuring in Boston Harbour out to the seaward entrance to the North Channel. However, other vessel movements during an LNG/LPG vessel transit may be allowed with permission of the Captain of the Port.

LNG/LPG Vessel Inspections: Before an LNG/LPG vessel is allowed to conduct cargo operations in the Port of Boston, the vessel must undergo a joint COTP/MIO Boston inspection to determine if all cargo handling and detection systems are in proper working order. One of the tests involves the introduction of a properly certificated amount of test gas (span gas) into the vessel's gas detection system. This allows the Inspector to determine if the gas detection system is functioning properly and is able to detect the presence of LNG or LPG should an actual leak occur somewhere on the vessel. Until recently, if a vessel did not have on board a cylinder of the properly certificated span gas, the Coast Guard Inspectors would provide this service. However, due to the increasing costs of the gas (LNG over $40.00 and LPG over $63.00), the vessel will be required to provide the span gas with a valid certificate attesting to its composition before the inspection can begin. Also, for the inspection to continue, shipboard or civilian technicians must be available to rectify any problem that may develop.

STEVEDORES: Available at various rates.

FRESH WATER: Plentiful supply of excellent water in Boston. It is supplied by terminal at prevailing rates.

FUEL: All grades available in various viscosities. Normally supplied by barge subject to advance notices.

CUSTOMS ALLOWANCE: At the discretion of Customs officers. Normal allowance is 200 cigarettes or 2 lb. of tobacco and 1 quart wine or spirits per man. Additional allowances may be given if considered necessary, due to length of vessel's stay in port.

IDENTIFICATION CARDS: Standard U.S. Immigration Forms I.–95 to be made up for each crew member on arrival. Not necessary for crew man already holding Form I.–95, issued for the same vessel.

GANGWAY/DECK WATCHMEN: Available at prevailing prices.
OPENING/CLOSING HATCHES: Performed by stevedores.
CONSULS:

Australia
Argentina
Austria
Belgium
Bolivia
Brazil
Canada
Chile
Cyprus
Colombia
Costa Rica
Denmark
Dominican Republic
Ecuador
El Salvador
Finland
France
W. Germany
Great Britain
Greece
Guatemala
Haiti
Honduras
Iceland
Ireland
Israel
Italy
Japan
Korea
Lebanon
Mexico
Netherlands
Nicaragua
Norway
Panama
Paraguay
Peru
Portugal
Spain
Sweden
Switzerland
Taiwan
Thailand
Turkey
Venezuala

REPAIRS: Any type of repair undertaken.
DRY DOCKS:
Bethlehem Steel Co., Shipbuilding

Division, East Boston, Massachusetts	*Length*	*Capacity*
Floating Dry Dock No. 1	622 ft.	18,000 tons
Floating Dry Dock No. 2	479 ft.	20,000 tons
Graving Dry Dock No. 4	256 ft.	

Modern facilities for repair, overhaul, and conversion of vessels of all sizes:

(*a*) a 10,000 ton capacity floating dry dock serviced by 2×150 ton overhead cranes with a yoked capacity of 350 tons. The 5-section dock is 415 ft. long, 120 ft. wide, and has an inside dimension of 85 ft. 7 in.

(*b*) 3 building basins (actually a 3-positioned graving dock). 2 are 132 ft. wide, 867 ft. long; 1 is 150 ft. wide, 938 ft. long. Each basin serviced by 2 whirley type cranes of 75 and 50 ton capacity.

(*c*) 4 outfitting piers capable of handling up to 10 ships simultaneously provide adequate space for dockside work and for mooring personnel or service barges.

(*d*) 3 conventional "sliding" ways capable of handling ships up to 1,000 ft. in length.

Major Shops: 2-bay fabricating shop served by 17 bridge cranes. Machine shop equipped with large vertical and horizontal mills planers, lathes and a complete small machine complement. Fully equipped sheet metal, joiner, boiler, blacksmith, pattern foundry, galvanizing, pipe and copper, and electrical shops. Complete facilities for inspection of all types including nondestructive testing such as radiography, magnetic particle, liquid penetrant and ultrasonic.
REPATRIATION: Good facilities exist.
HOLIDAYS: New Year's Day (1st January); Washington's Birthday (22nd February); Patriots' Day (19th April); Memorial Day (30th May); Bunker Hill Day (17th June); Independence Day (4th July); Labour Day (first Monday in September); Colombus Day (8th October); Veteran's Day (22nd November); Thanksgiving (fourth Thursday in November); Christmas Day (25th December). *Note:* "Or any day celebrated in lieu thereof".
TIME: Eastern Standard Time, GMT minus 5 hours. Daylight saving time, GMT minus 4 hours from April to October.
AUTHORITY: Massachusetts Port Authority.

BRIDGEPORT, Connecticut: 41.07 N. 73.11 W.

(See Plan Book)

DOCUMENTS: Refer to "New York".
PILOTAGE: Vessel usually notifies Agent 48 hours before arrival, who will arrange pilot boarding. Pilot boards either at Brenton Reef pos. 41° 25′ W., 71° 23′ W. or Point Judith pos. 41° 17′ N., 71° 29′ W.
ANCHORAGE: 2 miles South of the entrance with depths in excess of 50 ft.
RESTRICTIONS: Entrance channel has a project depth of 35 ft. at MLW, is 400 ft. wide and 3 miles in length.

Normal time allowed for transit from outside to off the dock is 30–45 mins. Docking time varies from 0.5 hr. to 1 hr., dependent on which terminal is the destination, and weather conditions.

The New Haven – Bridgeport Pilots Association believe 4 ft. of water in excess of the ship's draft is needed. As a rule of thumb, 31 ft. at low to 37 ft. at high. Any variations from this, a Pilot should be directly consulted. The range of tide is 6.7 ft. Wind strongly effects the tide in the main entrance channel. Flood and ebb cross the channel at a right angle, and velocities depend on the rise of tide for the day.

Vessels up to 70,000 d.w.t. and LOA 825 ft. call at the port.
MAX. SIZE: See "Berthing and Restrictions".
HEALTH: Vessel to cable Agent 24 hours prior to arrival of any illness on board, otherwise radio pratique not necessary.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Vessels arriving from North use Chatham Radio. Vessels from South use Amagansett Radio on Long Island.
TUGS: Tugs available from Red Star. The Despatcher monitors VHF and is available 24 hours a day through Channel 24 at Bridgeport.
BERTHING: *Cilco Terminal:* Cilco is a bulkhead dock, length approximately 1,100 ft. Vessels dock port or starboard side to. Two ships can moor at the same time. This is a dry cargo facility. Ships load or discharge all kinds of products. Several mobile cranes are available. Depth 33 ft. at mean low water. Bunkers are only available by truck. Fresh water is available.
TANKERS: *Bridgeport Shell – Buckley Bros.:* The Shell berth is located on the East side at right angles to the main entrance, and ships must be turned 90° to approach the dock. The dock is approximately 200 ft. long with 2 main resting dolphins and catwalks to shore. Head lines and stern lines are run ashore by a messenger. The size of vessels is governed by manifold distance. Light oil products 300 ft. and heavy oil 350 ft. Vessel of length 700 ft. have been moored, 38 ft. at MLW in ship berth. Ships dock port side to.

Bunkers and fresh water are available.

United Illuminating: Berth is 0.6 miles inside the breakwater on the West side of the channel. A turn to port of 120° must be made into a dredged cut 140 ft. wide. The dock is concrete caissons on pilings with catwalks and centre platform. Depth 32 ft. to 37 ft. at MLW. Vessels of 70,000 d.w.t. call, but bow to manifold distance governs size of vessel. (350 ft. – 375 ft.). Vessels dock starboard side to.

Fresh water is available, but bunkers are not. Every tanker, when moored here, has a slick boom placed around it.
FRESH WATER: Available at all berths.
FUEL: No fuel barge service available. In emergency tank truck delivery can be arranged.
MEDICAL: All facilities available.
AIRPORT: Bridgeport Airport about 3 miles away. New York airports about 50 miles distance.
CONSULS: All countries represented in New York.
HOLIDAYS: New Year's Day (1st January); Lincoln's Birthday (12th February); Washington's Birthday (18th February); Good Friday–Memorial Day–Independence Day (4th July); Labour Day–Columbus Day (14th October); Veterans' Day–Election Day (5th November); Thanksgiving Day (28th November); Christmas Day (25th December).
TIME: Daylight Saving Time, GMT minus 4 hours from April to October.
SERVICES: Ships stores and launch service available from New Haven. Vessels must provide their own gangway at all docks.
AUTHORITY: Office of the Harbour Master.

BROWNSVILLE, Texas: 25.54 N. 97.28 W.

(See Plan Book)

DOCUMENTS: See "Houston".
PILOTAGE: When a vessel is scheduled to arrive at the port of Brownsville the vessel's Agent notifies the Harbour Master's office of the approximate ETA. Later, when a firm ETA is received, the Harbour Master's office notifies the pilot office that the vessel is expected on the bar at a certain time and also gives the time which she would like to enter.

The telegraphic address of the pilot office is: Brazos-Santiago Pilots, 411 First National Bank Bldg., Brownsville, Texas.

If possible, it is desired that the Harbour Master's Office be notified 2 hours in advance of the ETA of any vessel.

The VHF Channel to be used when contacting the pilot boat and Harbour Master is 16. When contact is made, this will be switched to Channel 13.

The pilot boat is a steel hull length 43 ft. beam 16 ft. and draft 8 ft. 250 h.p. diesel. Gross tonnage 36 tons.

No light or sound signals are necessary from vessels requiring a Pilot, although light signals may sometimes be used at night – ordinarily a vessel is picked up by visual sighting.

The pilot boat is located on the South tip of Padre Island – the Pilot station is adjacent to the entrance to ship channel with a clear view of the approach to the jetties.

The Pilot is taken on board an incoming vessel at the sea buoy which is located 2 miles off shore.

The anchorage for a vessel awaiting Pilot is 1.5 miles North of sea buoy.
ANCHORAGES: Anchorages are marked on charts.
RESTRICTIONS: *Brazos Island Harbour:*

	Dredged Dimensions			*Minimum depths in channel entering from seaward*		
Name of Channel	*Feet Width*	*Miles Length*	*Feet Depth*	*Left Outside Quarter Feet*	*Middle Half of Channel Feet*	*Right Outside Quarter Feet*
Brazos Santiago Pass:						
Entrance Channel	300	1.9	38	40.0	39.0	37.0
Channel across Laguna Madre	200	2.9	36	38.0	38.0	38.0
Brownsville Channel:						
Junction Basin to Boca Chica Passing Basin	200	4.0	36	38.0	38.0	38.0
Boca Chica Passing Basin to Goose Island Passing Basin	200	5.4	36	38.0	38.0	38.0
Goose Island Passing Basin to Brownsville Turning Basin	200	2.8	36	37	38	37
Brownsville Turning Basin (extension)	500	1.4	36	37	38	37.5
Brownsville Turning Basin	500-1000	0.5	36	36	37	35

MAX. SIZE: The max. permissible: Length 800 ft., beam 160 ft., draft 34.5 ft.
RADIO: ETA cables to Agent, etc., should be addressed to the Agent via Mackay Radio at Galveston or RCA in Port Arthur. When within a 60 miles range of the port, calls may be made through the Harbour Master's office on VHF Channel 16 and the calls will then be transferred to land lines to any point. Also Brownsville Marine Operator, VHF Channel 26.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Brownsville Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
VHF: A vessel approaching the port of Brownsville may contact the Harbour Master's office on VHF Channel 16.
TUGS: Tugs normally join an incoming vessel 1.25 miles before she enters the turning basin. The tug's lines are used for which there is no charge.
BERTHING: Cargo facilities include over 7,500 ft. of modern, marginal dry cargo wharves, 14 deepsea docks and 10 barge berths, together with over 583,000 sq.ft. of transit shed space. In addition there is 242,000 sq.ft. of open storage space at the deep-draft docks and 271,000 sq.ft. of open storage at the shallow draft docks.
BULK HANDLING FACILITIES:

Public Grain Elevator: Located at the approach to the Turning Basin, the port-owned and operated elevator has a capacity of over 3,800,000 bushels. An adjacent bulk plant provides flat storage for all types of dry bulk commodities.

Two large gantry cranes handle the loading of vessels. The maximum spout clearance for loading vessels is 45 ft. above the water.

Equipped with two truck dumps and two hopper car dumps, the elevator has the rated loading capacity of 1,200 short tons per hour (1,000 L/T per hour on bulk carriers without wing tanks and 600 L/T per hour on tween deckers.)

The 400 ft. wharf is 12 ft. above water and has an unlimited berth length. The draft at dockside is 34 ft. and the channel control depth is 36 ft.

The grain elevator also has the flexibility of unloading vessels (barge unloading capacity is 300 t.p.h.).

Liquid Bulk Handling: Liquid Terminals, Inc., is a new facility that was built to handle and store all types of liquid commodities in bulk. The large storage tanks vary from 5,000 to 20,000 barrels each, providing a total of more than 125,000 barrels capacity for the entire installation. The modern liquid dock adjacent to the facility accommodates vessels with a deep draft of up to 34 ft. Loading racks provide for the efficient transfer of liquids to either truck or rail.

Four oil and chemical docks are located on the North side of the ship channel and are utilised by companies such as Exxon, Texaco, Union Carbide, Petroleos Mexicanos, Line Service, Continental and Permian Oil to handle bulk petroleum and chemical products. Also see "Tankers".
CRANES: Two large floating cranes, rated at 150 metric tons each, are available for heavy lifts at any dockside location in the port area.
STEVEDORES: To arrange for gangs the vessel needs to notify the ship's Agent of ETA; the Agent will in turn notify the stevedores. It is necessary that the Agent be advised of an ETA before 1900 hrs. for an 0800 hrs. start.

Main commodities and average load discharge rates:

Grain	Bulk carrier 1,200 t.p.h.
Grain	between deck 600 t.p.h.
Cotton	100 bales per hour per gang
Lead and zinc pigs	30 tons per hour per gang
Citrus in boxes	18 tons per hour per gang
Onions and carrots in bags	18 tons per hour per gang
General cargo	25 tons per hour per gang

MEDICAL: When medical attention is required, advance notice should be given the Agent by ship's radio.
TANKERS: Ballast facilities are available up to 6,000 barrels per hour. The port loads residual crude only – about 13.2 API. The port has 4 tanker berths, with 34 ft. 7 in. max. draft.
DENSITY: The average density is 32 parts per 1,000.
FRESH WATER: Fresh water is available and can be delivered to a vessel through hose or pipe-line at 150 gallons per minute.
FUEL: No fuel is available locally. It must be barged in from Corpus Christi – advance arrangements are necessary.
FIRE PRECAUTIONS: Tankers are required to berth head out.
DEVELOPMENTS: The Federal Government has made an appropriation to initiate a study on deepening ship channel from 36 ft. to 42 ft. and to widen the channel from 200 ft. to 300 ft., bottom width. Plans are being made to build another grain elevator/bulk materials dock, and another chemicals dock within 3 years.

GANGWAY/DECK WATCHMEN: Such services are necessary only when detainees are held on board.
OPENING/CLOSING HATCHES: This work is done by the stevedores.
IDENTIFICATION CARDS: Immigration requires form No. 1-95 Landing permit.

CONSULS: Mexico: tel. 542-4431; Guatemala, Costa Rica and Honduras, tel. 542-3506; Nicaragua, tel. 546-6861.

REPAIRS: Marathon, located at the port, is equipped to handle all normal temporary ship repairs.
DRY DOCKS: None available.
REPATRIATION: There are facilities for this service.
AIRPORT: The local airport is located 2 miles from the port. Braniff Airways operates 4 flights daily.
TIME: Local Time is 6 hours behind GMT.

HOLIDAYS: The following holidays are observed here: Veterans Day (4th Monday of October); Thanksgiving; Christmas; New Year; Washington's Birthday (Feb. 22nd); Texas Independence Day (March 2nd); Emancipation Day (June 19th); July 4th; Labour Day (1st Monday in September); Decoration Day (last Monday in May).

No work shall be performed on Labour Day or Christmas Day except in case of fire or where property is in danger. When holidays come on Sunday, the following day will be recognised as the holiday. Also, no work will be performed between 1600 and 1900 hrs. on election days.
POLICE/AMBULANCE/FIRE: Sherriff 546-2451; Brownsville Fire Dept. 542-4375; Ambulance Service 542-2121.
TELEPHONES: Telephones are not available for placing on ships.
SERVICES: Tank cleaning service is available at the port. Ballast facilities are available at oil docks 1, 2 and 3. P.I.B. can take care of compass adjusting, etc.
DELAYS: There are no delays unless an incoming ship has been assigned to a berth now occupied. Bunkers must be barged in; arrangements may be made ahead of time to avoid delay.
AUTHORITY: Port Director.

BRUNSWICK, Georgia: 31.09 N. 81.30 W.

DOCUMENTS:

Crew Lists: 1 certified copy for Immigration; 2 copies uncertified for Customs.
1 copy Pratique.
3 copies Inward Customs Manifests.
3 copies each Stores, Curio & Narcotics List.

PILOTAGE: Compulsory. 24-hour Pilot service arranged by Agent with 48-24 hour prior notice from ship. Pilot station at Buoy "St. S." Pilot reached through UHF Channels 12, 14, 16 on voice radio (R/T). Pilot boat is 25 ft. white hull. Marking is "Pilot" on hull.
ANCHORAGES: 3 miles S.E. of buoy "St. S." sand and mud bottom. In event deep draft (30 ft.) and high winds, anchorage near Ocean Buoy 2B and inform Pilot as in "Pilotage". Vessels in need or for other good reason, may anchor in St. Simon's Sound, depth 10 fathoms.
APPROACHES: The harbour is located about midway between Savannah and Jacksonville. the harbour is reached by a channel from the Atlantic Ocean, running between St. Simons and Jekyll Island. The channel has a minimum width of 500 ft. and a depth of 32 ft. to St. Simons Sound, thence a width of 400 ft. and a depth of 30 ft. to Sidney Lanier Bridge, where the channel divides, 13 miles from sea. The Northern branch leads to Lanier Dock, State Dock and the city, 400 ft. wide and 30 ft. deep. The other branch leads N.W. to the pulp plant dock, chemical docks and electrical generating plant, 300 ft. wide and 30 ft. deep.
RESTRICTIONS: No restrictions unless vessel drawing 30 ft. or more, then must await high tide to cross bar.
MAX. SIZE: Max. permissible length 650 ft. Max. d.w.t. over 33,000 tons.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Miami Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Prior arrival, use commercial Lantana, Chatham Radio for advices to Agent, 48-24 hours in advance.
TUGS: 3 Tugs, 500 h.p. each. Join vessel in St. Simon's Sound after passing lighthouse. Tug lines used.
BERTHING: 1,600 ft. continuous marginal wharf; steel and concrete construction, 57 ft. wide apron. Vessels normally turned to moor port side alongside unless deck cargo or other vessel obstruction means cargo may not be worked over port side. Gantry crane of 27 tons capacity available.

The Brunswick Port Authority operates a bulk commodity terminal at Lanier Dock. The facility is 500 ft. long and constructed of steel and concrete, with a project depth of 30 ft. MLW, equipped with a grab bucket, conveyors and marginal tracks for handling bulk cargoes at rates up to 600 t.p.h. It operates covered warehouses with a capacity of approx. 32,000 tons. A limited amount of open storage space is available equipped with a conveyor system and reclaim facilities. Lanier Dock lies directly adjacent to the Brunswick State Docks and warehouses. Both wharves have a turning basin of 1,000 ft. in length and 600 ft. wide with a project depth of 30 ft. MLW (mean low water) also Barge Dock facility 250 ft. long.
BRIDGES: 1: Lanier Bridge draw bridge; 250 ft. horizontal clearance, 139 ft. vertical clearance, up position, high water. Vessels under Pilot and tugs when passing through.
STEVEDORES: Wireless to Agent 48-24 hours prior arrival with number of gangs, working hatches and space in hatch, and special factors, e.g., pilferable cargo, autos, heavy-lifts, etc.
MEDICAL: Advance notice to Agent, or notify on arrival.
TANKERS: Liquid bulk cargo is pine oil distillates loading. Petroleum storage 310,000 barrels, Number 6.
DENSITY: Average 1.0166 (high) to 1.0141 (low). Water inside considered brackish.
FRESH WATER: From shore connections at 20 t.p.h.
FUEL: Bunker "C" available at piers. Distillate and blends by barge, if required. 72 hour advance notice to Agent, giving type and quantity.
GANGWAY/DECK WATCHMEN: Not required but available.
OPENING/CLOSING HATCHES: "MacGregor" hatches must be opened by vessel prior working. All others may open at discretion to save turn-around time.
CERTIFICATES: Registry, U.S. tonnage tax. CFR Pollution, Load line, SOLAS, De-ratting.
CUSTOMS ALLOWANCES: Tobacco, 2 cartons. Customs will open bonded stores on request. Spirits, reasonable amount.
IDENTIFICATION CARDS: U.S. Immigration Landing Permits.
CONSULS: None, Consulates at Savannah, Ga., and Jacksonville, Fla., may be used as required by vessel.

REPAIRS: Limited to minor replacement parts to engine, radio, radar of standard makes. Major repairs may be arranged with shipyards of Savannah or Jacksonville.
DRY DOCKS: None.
REPATRIATION: Through Agent.
AIRPORT: 20 minutes drive from quays; 4 flights daily.
TIME: GMT minus 5. Daylight Saving Time, 15 April through last Sunday October. April: advance; October: retard.
HOLIDAYS: 1st Jan., 15th Jan., 12th Feb., 22nd Feb., 30th May., 4th July, 1st Monday in September, 12th October, 11th November, 4th Thursday in November, 25th December.
POLICE/FIRE/AMBULANCE: Numbers given in Boarding Brochure.
TELEPHONES: None placed aboard. Public pay (coin) telephones on quay clearly marked.
GENERAL: Brunswick, Georgia, is a small port specialising in export of woodpulp in bales, pine-tree products in drums. Imports bulk salt, salt-cake, fertilizer materials and gypsum, some break-bulk general cargo. Vessel requirements handled by Agent in residence, communication by wireless or R/T essential in advance.
AUTHORITY: The Brunswick Port Authority and Georgia Port Authority.

BUFFALO, New York: 42.55 N. 78.55 W.

(See Plan Book)

DOCUMENTS: For vessels arriving from foreign ports:
3 Unfreighted copies of Complete Manifest covering all cargo to be discharged in the Great Lakes.
4 Personal Effects Lists.
4 Crew Lists.
4 Narcotics Lists.
Vessel's Registery and copies of Paid Tonnage Tax Certificates.
Health Pratique.
Clearance from previous port.
PILOTAGE: Not compulsory. Seaway Pilots will assist if required.
ANCHORAGE: Inside south breakwater, depth 23 ft – 27 ft.
MAX. SIZE: Limited by Seaway Locks. 730 ft. length and Seaway draft.
RESTRICTIONS: St. Lawrence Seaway navigation season approximately from 15th April to 15th December. Controlling depth 27 ft.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New York Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Available, but not normally required.
RADIO: WBL – Buffalo.
BERTHING: Outer harbour: Total berth space 2,400 ft.; depth alongside 27 ft. LWD. 2 transit sheds – total of 184,000 ft. dry dock space; sprinkler system equipped, seaway piers for bulk cargoes. South and North Piers 3,506 ft. of berth space, 200 acres open storage area. Depth alongside 27 ft.
SPECIALISED CARGO HANDLING FACILITIES: Niagara Frontier Transportation Authority has a mobile gantry crane capable of handling lift of 50 tons at 40 ft. with a boom. Additional heavy lift equipment available from commercial sources.
STEVEDORES: Gangs to be ordered by 1700 hrs. for 0800 hrs. start following day, ample gangs available.
DENSITY: Fresh water.
MEDICAL: U.S. Public Health Outpatient Clinic as well as numerous hospital facilities.
FRESH WATER: Available at most berths.
FUEL: All grades available by tank truck delivery or by harbour tank barge.
CONSULS: Canada, Costa Rica, Ecuador, France, Germany, Italy, Mexico, Netherlands and Sweden.
REPAIRS: Machinery and above-water repairs available.
AIRPORT: 5 miles, served by four regular airlines.
SHORE LEAVE: No restrictions when cleared by US Immigration Officials.
GENERAL: Refer to "Great Lakes Pilot".
AUTHORITY: Niagara Frontier Transportation Authority.

BURNS HARBOUR: Indiana: 41.38 N. 87.11 W.

(See Plan Book)

The entrance to Burns Waterway Harbour is at 41° 38′ N. and 87° 11′ W. and is located on the South shore of Lake Michigan at Portage, Indiana, some 30 miles East of Chicago in an area known as the Indiana Dunes.
PILOTAGE: Available.
RESTRICTIONS: Average Navigation Season: Domestic cargo by lake freighters – March 15th to February 1st. Ocean going vessels via Seaway – April 1st to December 15th. Lake river barges – twelve months.

Approach to Harbour: Controlling depth of water at harbour entrance 30 ft., entry is from deeper water. Length and Beam Limitations – none. Approach open 24 hours per day.

Harbour: Controlling depth of water for outer harbour 28 ft.; East and West harbour arms 27 ft. Turning basin – 1,600 ft. radius with water depth of 28 ft. Accessible 24 hours a day. Length and beam limitations – none.
TUGS: Available if required.
BERTHING: The port provides 30 ft. depth at the entrance channel, 28 ft. at the inner harbour, and 27 ft. at berths. The harbour is protected by an all weather breakwater.

The port has 7 modern berths plus a mooring facilitiy specifically designed for self-unloader ships. Ultimately the Port will have 15 ship berths. Recently completed are 2 modern, heated, sprinkler-equipped transit sheds providing 146,000 sq. ft. of space for general cargo, which are being operated by competent stevedores.

A refrigerated storage building is being constructed.
CRANES: 3 × 150 ton crawler cranes; 3 × 75 ton crawler cranes; 3 × 60 ton crawler cranes.
FRESH WATER: Available.
AUTHORITY: Indiana Port Commission, Port of Indiana – Burns Waterway Harbour, Portage, Indiana.

BURNSIDE, (Including St. James), Louisiana: 30.08 N. 90.55 W.

East bank of Mississippi River, about 200 miles from sea.
DOCUMENTS/PILOTAGE: For all general information refer to "New Orleans".
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made out to New Orleans Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Not normally required.
BERTHING: Bulk Marine Terminal: berth 800 ft. long, 40 ft. depth; Ormet Corporation berth 825 ft. long, 50 ft. depth.
TANKERS: *St. James:* The facility is located on the West bank of the Mississippi River at Mile 180 above Head of Passes.

The operators are Shell Pipeline Corporation, Donaldsonville, Louisiana.

There are 2 berths, one of which is 800 ft. long and the other 1,100 ft. long. At the newer dock there are two 16 in. arms and the berth is capable of unloading 28,000 barrels per hour.

The depth alongside these berths is 55 to 60 ft. However, the draft of the vessel is limited to that available at Southwest Pass.

It is important to note that due to the design of this terminal it is impractical for vessels to receive stores at this location. Additionally there are no bunkers provided at this terminal nor is there any fresh water available from the terminal and there is no authorized anchorage in the immediate area of this facility. Vessels expecting less than 24 hours delay awaiting berth are generally anchored at New Orleans and then proceed to the terminal (which is a different port of entry for Customs) otherwise vessels would have to anchor at Burnside which is about 10 miles up river from St. James.

Because of an underwater pipe-line near the dock, the terminal management requires all vessels using their facility to have at least 1 tug of 1,800 h.p. to assist in docking and undocking. Note that the tugs emanate from New Orleans which means approximately 7 hours transit to St. James.

As a point of reference it generally takes approximately 15 or 16 hours transit from Southwest Pass to St. James Terminal for most vessels.
FRESH WATER: Available ex-berth.
FUEL: Not available.
DENSITY: Fresh water, 1000.

CAPE COD CANAL, Massachusetts **(See Plan Book)**

The Cape Cod Canal is a sea-level canal, extending from a point on Cape Cod Bay about 50 miles S.E. of Boston Harbour, Mass., to the head of Buzzards Bay, Mass. In general direction the canal trends from Cape Cod Bay Westerly to Buzzards Bay.
PILOTAGE: The Corps of Engineers, Department of the Army, does not maintain pilot service but independent Pilots, licensed by the U.S. Coast Guard, are usually available at the canal. Messages will be transmitted to Pilots with the understanding that the Government will assume no responsibility in connection therewith.
RESTRICTIONS:

	Width bottom Feet	*Length Miles*
Easterly Entrance to Station 430	480*	8.4
Station 430 to Wings Neck (Hog Island Channel)	500	4.3
Wings Neck to Cleveland Ledge (Cleveland Ledge Channel)	700	4.7

*Except narrows to 450 ft. opposite State Pier.

The canal and approach channels have been dredged to the project depth of 32 ft. below mean low water.
RADIO: Direct communication with the Cape Cod Canal sub-office, New England Division, Corps of Engineers, is available at all hours by means of telegraph, telephone, or radio. The telephone number is 759-4431 or 789-4432.

The nearest ship to shore telephone stations are at Scituate call letters (WOU) and Chatham call letters (WCC). Bridge to bridge radio-telephone facilities are available on 156.65 mHz, 156.6 mHz, 156.7 mHz and 156.8 mHz. Vessels equipped for communications with the Cape Cod Canal are requested to keep their radio-telephone tuned to the above frequencies.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Boston Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Not available.

BERTHING: Mooring basins are located at the East and West ends of the canal. The East Mooring Basin, located on the North side of the canal is 2,500 ft. in length, 350 ft. in width and is maintained at a depth of 25 ft. at mean low water. The West Mooring Basin, located on the S.E. side of the Hog Island Channel is 3,300 ft. in length, 350 ft. in width and is maintained at a depth of 32 ft. at mean low water. Mooring dolphins are provided in both mooring basins.

BRIDGES: 2 fixed span high-level highway bridges and 1 vertical lift railroad bridge cross the canal.

The minimum bridge clearance for the available width of channels are as follows:

	Horizontal Clearance	*Vertical Clearance (mean high water)*
Highway Bridges	480 ft.	135 ft.
Railroad Bridge	466 ft.	135 ft. (open)
(vertical Lift)		7 ft. (closed)

COAST GUARD STATION AND WEATHER SIGNALS: A U.S. Coast Guard Station is located near the Eastern entrance.

TRAFFIC LIGHTS: Red, green and amber electric lights, visible for a distance of about 2 miles in clear weather, day or night, are located at the following points:

(a) Eastern or Cape Cod Bay entrance, on South side of entrance at an elevation of about 55 ft. above high water.

(b) Western or Buzzards Bay entrance, (1) Wings Neck, near Wings Neck Light at an elevation of about 48 ft. above high water.

AUTHORITY: Corps of Engineers, Dept. of the Army, Waltham, Massachusetts.

CASTLE ISLAND, Alaska

Located in Duncan Canal off Kupreanof Island between Wrangell and Petersburg. Open all year.

DOCUMENTS: See "Anchorage, Alaska".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

PILOTAGE: (From sea via Dixon Entrance up Clarence Strait to Guard Island.) Under pilotage from Guard Island.

MAX. SIZE: Harbour depth 45 ft.

TIDES: Diurnal range 16 ft. Also see "Berthing".

ANCHORAGE: Fair weather anchorage only.

CUSTOMS: Quarantine and Immigration available from Guard Island. Customs available from Petersburg or Guard Island.

BERTHING: Alaska Barite facility: dolphins and 2 floats. Present facilities limited to about 22,000-ton ships. Loading equipment consists of 1 loading spout for bulk cargo. Production average of 1,000 t.p.h.

TUGS: From Wrangell 3 available 500 h.p. each.

STEVEDORES: Sufficient to work ore loading facility 24 hours a day when necessary.

REPAIRS/WATER/FUEL: None.

MEDICAL: Facilities available in Petersburg or Wrangell.

AIRPORT: Charter airplane only.

CHARLESTON, South Carolina: 32.47 N. 79.56 W. (See Plan Book)

DOCUMENTS:

3 Crew Lists.
3 Curio Lists.
3 Stores Lists.
3 Manifests.
At least 1 copy of Bill of Lading, if provided by shipper, and 1 copy of Parting Crew List.

PILOTAGE: Shipmasters to notify Agent 48, 24 and 12 hours prior arrival at C-2 Buoy. Pilot may be contacted by VHF Channels 16 and 18. Pilot boards on lee side from black-painted launch with "PILOT" painted in white letters on the side. Normally vessel is berthed by Docking Master from tug company.

ANCHORAGES: Rarely required.

RESTRICTIONS: Only restriction affecting operation relates to channel depth of 35 ft. at low tide.

MAX. SIZE: Can handle vessels 950 ft. long. Present facilities measure 475 ft. from centre of discharge pipe-line to end of dock.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Fort Monroe Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Normal procedure. No special or unusual procedures required.

TUGS: Tugs usually join tankers between Cooper River Bridge and Coal Pier, approximately 0.5 mile from dock. Tug lines used. No charge made for this service.

BERTHING: *Union Pier:* State Pier No. 2: 3 berths. Break-bulk terminal, length 2,083 ft. Depth 35 ft. One 90 ton track crane and one 75 ton gantry crane.

Colombus Street Terminal: State Pier No. 8. 5 berths. Length 3,875 ft. Depth 35 ft. Terminal handles break-bulk and containers. One 440 ft. fruit berth. One 75 ton container gantry crane, 50 ton and 30 ton gantry cranes serve 1,940 ft. of berthing space along the South end of the pier. One 400 ton capacity sheer-leg and one 90 ton truck crane.

North Charleston Terminal: State Pier 15: Total length 2,500 ft. One general cargo berth length 600 ft., one grain berth, length 675 ft. 2 container berths each 930 ft.length. 2×50 ton container cranes, one grain elevator, capacity 1.5 million bushels. Also one gantry crane of 50 tons capacity.

STEVEDORES: *Working Hours:* Labour may be ordered for work to start at the following times: 0800, 1000, 1200 and 1900 hrs. Labour will usually work as long as necessary; shift system not used in this port.

RADAR/VHF: Services required are handled through Agent.

MEDICAL: Advance notice when possible.

TANKERS: Discharge lines all 8 in. dia. and 1 solvent line 8 in. Adapter to conform to ship's discharge lines supplied. Draft not to exceed 35 ft. low tide. Tanker berths operated by Humble Oil, Shell Oil, Hess Oil, BPT, and Phillips Petroleum, all suitable for 35 ft. draft. Gulf Oil berth, max. draft 30 ft. Texaco berth, max. draft 32 ft.

FRESH WATER: Available via 2.5 in. hose at a rate of 500 bbls.p.h.

FUEL: Bunker "C" at API of 14.4 to 16.6 (approx.) and blended Bonded Intermediate grades from 1 to 30.

FIRE PRECAUTIONS: Normal precautions.

DEVELOPMENTS: No changes planned in present facilities until channel depth is increased.

GANGWAY/DECK WATCHMEN: Supplied by Agent upon request from Shipmaster only.

CERTIFICATES: Normal International certificates.

CUSTOMS ALLOWANCE: Tobacco, Wine and/or Spirits, governed by length of time in port and existing Customs regulations.

CONSULS:

Denmark: Ashmead F. Pringle, Jr., 607 Peoples Building, 18 Broad Street, Charleston, S.C. 29401. Tel.: 722-7016.

France: Jack C. Muller, 6 King Street, Charleston, S.C. 29401. Tel.: 722-8045.

Norway: James D. Lucas, Jr., 10 N. Adgers Wharf, Post Office Box 536, Charleston, S.C. 29401. Tel.: 577-5782.

Switzerland: Dr. Hans Kuhn, 176 West Park Drive, Spartanburg, S.C. 29301. Tel.: 585-3922.

REPAIRS: Available.

DRY DOCKS: 1×10,000-ton floating dock, 1×1,500-ton, and 2×1,000-ton floating docks.

REPATRIATION: Facilities available.

AIRPORT: 10 miles from Terminal, served by regular airlines.

HOLIDAYS: Work continues on holidays.

POLICE/AMBULANCE/FIRE: Contact dockmaster at any time.

TELEPHONES: No arrangements exist for placing phones aboard vessels. Phone facilities are situated within 100 ft. of vessel at dock.

SERVICES: No tank cleaning/washing facilities available at dock. Can be arranged and handled at local shipyard. Practically any other service available at dockside.

SHORE LEAVE: Subject Shipmaster's permission and existing Immigration regulations.

DELAYS: Normally, no delays beyond normal time required to connect/disconnect hoses.

AUTHORITY: South Carolina State Ports Authority.

CHICAGO: Illinois: 41.50 N. 87.45 W. (See Plan Book)

DOCUMENTS:

For Agent in Montreal:

3 unfreighted copies of Complete Manifest for Seaway Toll purposes covering all cargo to be discharged in the Great Lakes.

In first U.S. port: a "Traveller" is made up by the Customs Inspector with the following documents:

2 complete sets of U.S. Cargo Manifests, plus 6 copies for Agents.
1 set Manifest of Cargo for first U.S. port.
4 Stores Lists.
4 Personal Effects Lists.
4 Firearms and Ammunition Lists.
4 Crew Lists, Form I418.
4 Narcotics Lists.
4 Vessel's Itinerary Lists.
Vessel's Registry and copies of Paid Tonnage Tax Certificates.
Health Pratique.
Clearance from previous port.
2 sets Bills of Lading.
3 copies Stowage Plan.

In subsequent U.S. ports the following are required:

5 sets Manifest of Cargo for that port.
The "Traveller" and Permit to Proceed issued in previous port.
2 Stores Lists.
2 Personal Effects Lists.
2 Firearms and Ammunition Lists.
2 Crew Lists.
2 Narcotics Lists.
2 sets Bills of Lading.
3 copies Stowage Plan.

PILOTAGE: Compulsory unless Master holds exemption "B" license. 24 hours notice of arrival required by Agents who arrange Pilot.

ANCHORAGE: In Chicago Harbour, anchorages A, B and F designated for merchant ships and marked on charts. In Calumet Harbour vessels should not anchor within 1,000 ft. of the breakwaters.

RESTRICTIONS: St. Lawrence Seaway navigation season approximately from April 15th to November 15th. Controlling depth 27 ft.

MAX. SIZE: Limited at Seaway Locks. 730 ft. length, 26 ft. draft. Depth alongside terminals 27 ft.

RADIO: Port can be contacted by Illinois telephone station WAY.

Notice of arrival; Master must give at least 24 hours notice to

Commander 9th Coast Guard District, Cleveland, Ohio, of the vessel's ETA at Snell Lock. Also at least 24 hours notice of ETA at first U.S.A. discharge port is required.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Chicago Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Available, not compulsory but recommended.
BERTHING: *Navy Pier Terminal:* Ceres Marine Terminal has 1,235 ft. of berthing space and more than 250,000 sq. ft. of dock space, with 185,000 sq. ft. under cover. North Pier also features adjacent warehousing available in its downtown distribution centre. Lift truck capacity at North Pier ranges up to 62,000 lb.

Terminal features dockside rail and truck service and mobile cranes for heavy lifts.

Calumut River Terminals: Iroquois Landing Lakefront Terminals. Operators: Ceres Marine Terminals and International Great Lakes Shipping. Facilities at the mouth of the Calumut River. Handles general cargoes, steel products, bulk liquids and containers. The terminal has 3,000 ft. of berthing space, 130,000 sq. ft. of transit shed storage, and 850,000 sq. ft. of open storage. Heavy lift cranes run from 75 to 110 tons in capacity. Also numerous lift trucks, with capacities to 56,000 lb.

Federal Marine Terminals Inc. handles general cargo, steel products and containers. This facility has 730 ft. of berthing space, 34,000 sq. ft. of covered storage space and 11 acres of open storage space. Heavy lift cranes at Federal Marine range from 20 to 150 tons. Lift truck capacities range up to 52,000 lb.

The Rail to Water Transfer Corp. (RTW) on the Calumet River specialises in handling, storing and distributing raw materials or dry bulk commodities. RTW's twin bulk loading facilities offer 2 deep-water berths, each more than 700 ft. long. The facility has railroad yards that accommodate 2,200 rail cars adjacent to the dock. The twin loading towers provide fast handling at up to 2,500 t.p.h.

Lake Calumet Terminals: Bulk Terminals Co. in Lake Calumet transfers liquid bulk cargoes – animal fats, vegetable oils and chemicals. Bulk Terminals has 400 ft. of berthing space, with storage capacity of more than 550,000 barrels and 16,000 sq. ft. of drumming warehouse space. This facility has a transfer capacity of approximately 200 t.p.h. Bulk also has 5 miles of internal railroad trackage and a switch engine.

The International-Great Lakes Shipping Company (INGLA) terminal at Lake Calumet handles steel, ores, pig iron, scrap and containers. The terminal was designed for easy interchange of cargoes to and from deep sea vessels. Mississippi River barges, Great Lakes vessels, railroads and trucks – both local and interstate. Truck and railcar weighing services are available also. INGLA has 1,500 ft. of berthing space; 45,000 sq. ft. of covered storage and 27 acres of open storage. Heavy lift equipment includes 5 cranes ranging from 125 to 150 tons. Lift truck capacities range up to 50,000 lb. per unit.

Ceres Marine Terminals facilities on Lake Calumet have 176,000 sq. ft. of transit shed (60,000 heated); 100,000 sq. ft. of general storage, warehouse and distribution area (50,000 heated), and 50,000 sq. ft. of open storage. Refrigerated space is available in the transit warehouse. Equipment includes lift trucks with capacities up to 62,000 lb. North Pier services barge traffic to and from locations along the entire inland waterway system, and as far South as the Gulf, in addition to serving deep draft vessels.

EmEsCo warehousing and marine terminal facilities on Lake Calumet are designed for efficient handling of steel, machinery, containers, scrap, pig iron, ferro-alloys and other metallic bulk commodities. EmEsCo's 800 ft. of heavy duty bulkhead and 2×75-ton gantry mounted cranes operating over 3,700 ft. of tracks provide more than 1,000,000 sq. ft. of open storage under cranes. EmEsCo has 100,000 sq. ft. of heated warehouse, with plans to expand that to 425,000 sq. ft. Other features are 25 acres of open storage, miscellaneous auxiliary cranes, an electronic truck and rail scale, 25,000 ft. of railroad track, ship to barge transfer, 100 intra-plant flat and gondola cars.

Trade Zone Distribution, Inc.: Operates Free Trade Zone No. 22 for warehousing, storage and distribution.

Buffington Harbour: Private harbour owned by Universal Atlas Cement. Located about 9.5 miles S.E. of Calumet Harbour. A concrete dock 1,755 ft. long, enclosed by a breakwater with entrance 880 ft. wide. Exposed to heavy N.E. swell. Depth alongside from 25 to 31 ft.

BULK HANDLING FACILITIES: Continental Grain Company's Elevator "B" on the Calumet River has a storage capacity of 6,800,000 bushels. Elevator "B" has 5 loading spouts with a shipping capacity of 40,000 bushels per hour. Unloading capacity from barges is 15,000 bushels per hour. Receiving capacity from rail cars is 10,000 bushels per hour and from trucks 15,000 bushels per hour. The berthing space at elevator "B" is 1,025 ft.

The Cargill Inc. grain elevator on the Calumet River has a capacity of 23 million bushels. In addition to grain, this facility handles salt, molasses, and grain by-products. Cargill has 3,600 ft. of berthing space – 1,200 of this for elevator use, and 20 acres of open storage. Loading capacity is 60,000 bushels per hour, while unloading is 12,500 bushels per hour. Cargill has 3 marine legs, and 5 loading spouts.

The Gateway Elevator of the Indiana Grain Co-Operative at Lake Calumet offers storage capacity of 6,500,000 bushels for bulk grains. The 8 loading spouts have a capacity of 20,000 bushels each per hour. Unloading speed is 10,000 bushels per hour. Berthing space is 1,000 ft.

Continental Grain's Elevator "C" at Lake Calumet has a capacity of 6,500,000 bushels of bulk grain and grain products. The 8 loading spouts have a capacity of 20,000 bushels each per hour. Unloading capacity is 10,000 bushels per hour. This facility has 1,000 ft. of berthing space.
DENSITY: Fresh water.
MEDICAL: Doctors, hospital and all facilities available.
FRESH WATER: Available at most berths.
FUEL: All grades available, ex-wharf, or delivered by barge.
CONSULS:
Argentina
Australia
Austria
Barbados
Belgium
Bolivia
Brazil
Canada
Great Britain
Chile
China
Colombia
Costa Rica
Denmark
Dominican Republic
Ecuador
El Salvador
Finland
France
Germany
Greece
Guatemala
Honduras
Iceland
India
Iran
Ireland
Israel
Monaco
Italy
Jamaica
Japan
Jordan
Korea
Lebanon
Liberia
Lithuania
Luxembourg
Malagasy Republic
Mexico
Netherlands
Nicaragua
Norway
Panama
Paraguay
Peru
Philippines
Poland
Portugal
Senegal
Spain
Sri Lanka
Sweden
Switzerland
Thailand
Turkey
Uruguay
Venezuela
Yugoslavia
REPAIRS: All marine repairs can be effected.
DRY DOCKS: No. 1, 570 ft. length, 71 ft. 8 in. wide, 16 ft. sill depth. No. 2, 727 ft. length, 90 ft. 2 in. wide, 16 ft. 3 in. sill depth.
GENERAL: Refer to "St. Lawrence Seaway" for important general information.

AUTHORITY: Department of Port of Chicago, Navy Pier, Chicago.

CLEVELAND, Ohio: 41.31 N. 81.43 W. (See Plan Book)

DOCUMENTS:
For Agent in Montreal:
3 unfreighted copies of Complete Manifest for Seaway Toll purposes covering all cargo to be discharged in the Great Lakes.
In first U.S. port: a "Traveller" is made up by the Customs Inspector with the following documents:
2 complete sets of U.S. Cargo Manifests, plus 6 copies for Agents.
1 set Manifest of Cargo for first U.S. port.
4 Stores Lists.
4 Personal Effects Lists.
4 Firearms and Ammunition Lists.
4 Crew Lists, Form I418.
4 Narcotics Lists.
4 Vessel's Itinerary Lists.
Vessel's Registry and copies of Paid Tonnage Tax Certificates.
Health Pratique.
Clearance from previous port.
2 sets Bills of Lading.
3 copies Stowage Plan.
In subsequent U.S. ports the following are required:
5 sets Manifest of Cargo for that port.
The "Traveller" and Permit to Proceed issued in previous port.
2 Stores Lists.
2 Personal Effects Lists.
2 Firearms and Ammunition Lists.
2 Crew Lists.
2 Narcotics Lists.
2 set Bills of Lading.
3 copies Stowage Plan.

It is especially important that vessels try to have their visaed Crew List on board which is required by U.S. Immigration at first U.S. port. Failure to have this visaed Crew List can result in all personnel being detained on board. Visa waivers are applied for and granted fairly regularly but Immigration has the discretion to refuse these at will.
PILOTAGE: Compulsory, unless Master has a "B" Certificate on board. Vessels are not permitted to transit the lakes from Port Colborne to Cleveland without either a "B" Certificate on board or a special Waiver from the U.S. Coastguard.
ANCHORAGE: In the outer harbour, 28 ft. depth, mud and sand bottom.
RESTRICTIONS: St. Lawrence Seaway navigation season approximately from April 15th to December 15th. Controlling depth 25 to 27 ft. Access to berths in the River is limited by height restriction of 97 ft. above waterline.
MAX. SIZE: Limited at Seaway Locks, 730 ft. length, 26 ft. draft.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Chicago Quarantine Station.
AGRICULTURE: See "Agriculture" first U.S.A. port (Albany).
TUGS: Available and use is compulsory in Cuyahoga River and Old River channel.
RADIO: U.S. Coast Guard can be contacted by R/T on 2182 kc/s.

Notice of arrival: Master must give at least 24 hours notice to Commander 9th Coast Guard District, Cleveland, Ohio, of the vessel's ETA at Snell Lock. Also at least 24 hours notice of ETA at first U.S. discharge port is required.

BERTHING:

Pier	*Owner/ Operator*	*Berth features*	*Depth (ft.)*	*Mechanical Equipment*	
Dock 20	Cleveland Stevedore Co.	East 900 ft.	27	Three 40-ton capacity Diesel-Locomotive Cranes One 200-ton capacity Crawler Crane Three 150-ton capacity Crawler Cranes	One 100-ton capacity Truck Crane 55 Fork Lift Trucks up to and including 30-ton capacity 50-ton capacity Truck Scale
Dock 24 West 9th St. Pier	Cleveland Cuyahoga County Port Authority	East 670 ft. North 519 ft. West 640 ft.	27	*Available on Port Authority Piers* One 200-ton capacity Crawler crane One 150-ton capacity Crawler crane	Cleveland Stevedore Co. Three 40-ton capacity Diesel Locomotive Cranes
Dock 26 West 6th St. Pier	Cleveland Cuyahoga County Port Authority	East 698 ft. North 297 ft. West 681 ft.	27	One 130-ton capacity Crawler crane One 110-ton capacity Crawler crane One 85-ton capacity Crawler crane	One 200-ton capacity Crawler crane Three 150-ton capacity Crawler cranes One 65-ton capacity Crawler crane
Dock 28 West 3rd St. Pier	Cleveland Cuyahoga County Port Authority	West 710 ft.	27	32 Fork Lift trucks up to and including 40-ton capacity. Container top-handling racks, modern gear for Break Bulk and Steel cargoes.	55 Fork Lift Trucks up to and including 31-ton capacity. Automatic container handling gear. Pumps, Clam, Shell Buckets, Electro Magnets, Steel handling and Break Bulk equipment, Special Fork Lift Trucks for newsprint, Stuffing and Stripping facilities.
Dock 30 Stadium Pier	Cleveland Cuyahoga County Port Authority	North 1,606 ft. (28–30–32)	27		
Dock 32 Stadium Pier	Cleveland Cuyahoga County Port Authority	East 712 ft.	27		
				Serving Pier 28 Cleveland Cuyahoga County Port Authority One 150 short (2,000)-ton capacity stiff-leg crane. The "Buckeye Booster". Capacity – 150 tons at 65 ft., 100 tons at 85 ft. Max. arc swing 265°	
Dock 54 Nicholson Pier	Nicholson Cleveland Terminal	West 574 ft.	21	Two 10-ton capacity Fixed Cranes Fork Lift Trucks	Not used for handling waterborne commerce
Dock A	Baltimore & Ohio R.R.	East 500 ft.	23	Two 5-ton capacity Bridge Type Cranes	Not used for handling waterborne commerce
Sycamore Dock	Cleveland Stevedore Co.	East 750 ft.	23		Not used for handling waterborne commerce
Dock 1	Penn Central Railroad	450 ft.			

SPACE AVAILABLE:

Dock 20: 30,000 sq. ft. Transit shed. 200,000 sq.ft. open. Fully paved.
Dock 24: West 9th St. Pier, 285,680 sq. ft. open. Fully paved, 64,320 sq. ft. Transit shed.
Dock 26: West 6th St. Pier, 85,000 sq. ft. Transit shed. 85,000 sq. ft. open. Fully paved.
Dock 28: West 3rd St. Pier, 260,000 sq. ft. open. Fully paved.
Dock 30: Stadium Pier, 54,000 sq. ft. Transit shed 350,000 sq. ft. open. Fully paved.
Dock 32: Stadium Pier, 64,000 sq. ft. Transit shed. 350,000 sq. ft. open. Fully paved.

BULK HANDLING FACILITIES:

Ore: *Unloading docks:*

Dock and Location	*Operator*	*Unloading Equipment*	*Total Tons/Hr. Unld. Spd.*	*Length-Width (in Feet)*		*Out-Board Reach*	*Storage Cap. Tons*	*Depth at Dock*	*Remarks*
"C. & P." (Lakefront)	Ohio & Western Pennsylvania Dock Co.	4-17 ton Huletts	3,300	1,875	535	60 ft. 0 in.	1,000,000	27 ft.	
Central Furnace (Cuyahoga River)	United States Steel Corporation	2-10 ton Huletts	650	900	40	43 ft. 2 in.	530,000	23 ft.	630 ft.×68 ft. max. O.A. dimensions
Corrigan-McKinney (Cuyahoga River)	Republic Steel Corp.	Upper 2-17 ton Huletts	1,000	1,250	360	57 ft. 1 in	785,000	23 ft.	630 ft.×68 ft. max. O.A. dimensions
Note: Also receives limestone at this dock by self-unloader. Storage capacity: 30,000.		Lower 3-10 ton Huletts	900	3,340	360	44 ft. 4 in.	750,000	23 ft.	630 ft.×68 ft. max. O.A. dimensions
Note: Also receives limestone at this dock by self-unloader. Storage capacity: 35,000 and ships pig iron and steel. Storage capacity: 10,000 tons.									
Nypano (Old River)	Merchants Dispatch Transportation Co.	3-17 ton Huletts	2,300	1,600	—	65 ft. 0 in.	Direct to cars	24 ft.	647 ft.×70 ft. max. O.A. dimensions
Otis (Cuyahoga River)	Jones & Laughlin Steel Corporation	Self-unloaders only	—	1,780	54	—	1,000,000	23 ft.	630 ft.×68 ft. max. O.A. dimensions
Note: Also receives limestone at this dock. Storage capacity: 150,000. Scrap received by crane vessel.									

Stone, Sand and Dry Bulk Cargo Docks:

Dock and Location	*Operator*	*Loading Equipment*	*Total Tons/Hr. Load Speed*	*Unloading Equipment*	*Total Tons/Hr. Unload Speed*	*Storage Capacity (Tons)*	*Dock Length (Feet)*	*Depth at Dock (Feet)*	*Remarks*
Akzona-International Salt (Whiskey Is., Old River)	Akzona, Incorporated	1 Shuttle Conveyor Belt	1,200	None	—	6,000 Salt (covered) 55,000 Salt open storage	602	21 ft.	617 ft.×64 ft. max. O.A. dimensions
	Note: Outboard reach from Face of Dock to end of pulley is 38ft. 6in. Underside of belt to L.W.D. is 37ft. Stationary. Vertical movement downward.								
Allied Crane (East Bank, 100 ft. below Main Avenue, High Level Bridge)	Halvorsen Co.	None	—	Self-unloaders only	—	25,000 at Dock. Additional. 10,000 away from Dock. 20,000 sq. ft. Warehouse on property.	630	22 ft.	Handles various ores, clay and bulk materials.

Dock and Location	Operator	Loading Equipment	Total Tons/Hr. Load Speed	Unloading Equipment	Total Tons/Hr. Unload Speed	Storage Capacity (Tons)	Dock Length (Feet)	Depth at Dock (Feet)	Remarks
CBS "Cuyahoga Plant" (Below West 3rd Street Bridge)	Cleveland Builders Supply Company	None	—	Self-unloaders only	—	20,000 Sand or Salt	750	20 ft.	631 ft. max O.A. Length
CBS No. 1 (Above Jefferson Street Bridge)	Cleveland Builders Supply Company	None	—	Self-unloaders only	—	45,000 Stone 25,000 Sand	480	20 ft.	561 ft. max. O.A. Length
CBS No. 2 (Between Nickel Plate Bridge & West 3rd Street Bridge)	Cleveland Builders Supply Company	None	—	Self-unloaders only	—	120,000 Stone 50,000 Sand 15,000 Salt	1,680	22 ft.	630 ft.×68 ft. max. O.A. dimensions
Central Furnace – Lower (Cuyahoga River)	United States Steel Corporation	Self-loaders only	—	Self-unloaders only	—	104,000 Stone 10,000 Pig iron	2,349	22 ft.	630 ft.×68 ft. max. O.A. dimensions
Clifton Concrete (Foot of Mahoning Avenue)	Clifton Concrete & Supply Company	None	—	Self-unloaders only	—	25,000 Stone 18,000 Sand	690	18 ft.	610 ft. max. O.A. Length
Ford Motor (Above Lorain-Carnegie Viaduct)	Ford Motor Co.	None	—	Self-unloaders only	—	780,000 Sand and Stone Pig Iron and scrap direct to cars.	630	21 ft.	633ft. max. O.A. Length
Huron Cement (Sycamore Slip)	Cement Division National Gypsum Co.	None	—	Unloading pipes	—	31,332 Cement	415	24 ft.	502 ft.×68 ft. max. O.A. dimensions
Jones & Laughlin (Just below Union Terminal Viaduct)	Jones & Laughlin Steel Corporation	None	—	Self-unloaders only	—	100,000 Iron Ore and Stone	620 & 300	23 ft.	630 ft.×68 ft. max. O.A. dimensions
Lower Republic East Pier (Above Turning Basin)	Republic Steel Corp.	None	—	Self-unloaders only	—	87,000 Stone 8,300 Fluorspar	2,565	23 ft.	630 ft.×68 ft. max. O.A. dimensions
	Note: Dock also receives ships pig iron, steel products and scrap.								
M.C.C. (Above Eagle Street Bridge)	Mid-Continental Coal & Coke Co.	2 Shuttle Conveyors	500	None	—	30,000 Coke Breeze	1,550	23 ft.	631 ft. max. O.A. Length
Merwin Avenue Dock (Between Foot of British Street and Viaduct)	Cuyahoga Lime Co. Incorporated	None	—	Self-unloaders only	—	45,000 Stone 65,000 Marl	245	23 ft.	650 ft.×72 ft. max. O.A. dimensions
Ontario Stone No. 1 (Above Penn Central Bridge, Mouth Cuyahoga River)	Ontario Stone Corp.	None	—	Self-unloaders only	—	125,000 Stone	495	23 ft.	664 ft. max. O.A. Length
Ontario Stone No. 2 (Left Bank, above West 3rd Street Bridge)	Ontario Stone Corp.	None	—	Self-unloaders only	—	75,000 Stone	695	23ft.	630 ft.×68 ft. max. O.A. dimensions
Ontario Stone No. 3 (Old River Bed, on Whiskey Island)	Ontario Stone Corp.	None	—	Self-unloaders only	—	175,000 Bulk commodities	700	24 ft.	647 ft.×70 ft. max. O.A. dimensions
Sand Products (Whiskey Island, Old River)	Sand Products Corp.	None	—	Self-unloaders only	—	95,000 Sand	850	22 ft.	606 ft. max. O.A. Length

Grain:

Elevator	Depth at Dock	Depth in Channel	Unload Legs	Unload Speed	Load Spouts	Load Speed	Deepest Vessel Can Unload
CEREAL FOOD Operator: Cereal Food Processors, Inc.	20 ft.	23 ft.	1	4,500	None	None	30 ft.

Berthing Space – 350 ft.
545ft.×58ft. max. O.A. Dimensions
Con Rail   Storage capacity: 590,000

This elevator is located on the Cuyahoga River directly beneath the Superior Avenue high level bridge.

CHANNELS

Cleveland Harbour entrance is maintained at 28ft. Cuyahoga River is maintained at 23 ft. throughout above the Con Rail Railroad bridge just above the harbour entrance. Width of the channel is generally 250 ft. throughout the Cuyahoga River.

TANKERS:

Dock & Location	Operator	Type of Dock	Type of Cargo Handled	Size of Pipe-line	Storage Capacity (Barrels)	Distance from Dock to Storage Tanks	Length of Dock	Depth at Dock	Remarks
Allied Oil (Old River, Slip No. 2, Whiskey Island)	Allied Oil Co. Division of Ashland Oil, Inc.	Loading and Unloading	No. 2 Fuel Oil No. 6 Fuel Oil	6 in. 2 in.-6 in.	112,000 260,000	270 ft.	435 ft.	20 ft.	390 ft. max. O.A. Length
Byerlite-Koppers (Foot of Mary Street Cuyahoga River)	Byerlite Co. of Koppers Company, Inc.	Unloading	Toluene Ashphalt	2 in.-6 in. 8 in.	37,035 47,620	30 ft. 1,100 ft.	203 ft.	19 ft.	Unloads Barges
Gulf Oil (West Bank Cuyahoga River, below Jefferson Avenue Bridge)	Gulf Oil Corporation	Unloading and Bunkering	No. 6 Fuel Oil No. 2 Diesel Oil	10 in 4 in.-6 in.	50,000 145,000	140 ft.	850 ft.	23 ft.	631 ft.×65 ft. max. O.A. dimensions

Dock & Location	*Operator*	*Type of Dock*	*Type of Cargo Handled*	*Size of Pipe-line*	*Storage Capacity (Barrels)*	*Distance from Dock to Storage Tanks*	*Length of Dock*	*Depth at Dock*	*Remarks*
Jones and Laughlin (Otis Cleveland Works)	Jones and Laughlin Steel Corporation	Unloading	No. 6 Fuel Oil	10 in.	214,300	2,100 ft.	390 ft.	23 ft.	
Marine Fuelling (East Bank, Cuyahoga River, above Jefferson Avenue Bridge)	Marine Fuelling Incorporated	Loading and Unloading	No. 6 Fuel Oil No. 2 Diesel Oil	8 in 10 in.	73,000 38,000	30 ft.	520 ft.	22 ft.	
Mobil Oil (West Bank, Cuyahoga River, Foot Mahoning Avenue)	Mobil Oil Corp.	Unloading	Gasoline No. 1 Fuel Oil No. 2 Fuel Oil	2 in.-6 in. Serves All	106,690 23,645 37,000	900 ft.	693 ft.	18 ft.	610 ft. max O.A. Length
Reilly Tar & Chemical (Lowest Republic – East Dock, ahead of Ore Unloaders)	Reilly Tar & Chemical Corporation	Loading and Unloading	Tar Creosote Oil	8 in. Serves Both	71,430 Same tank For Both	half-mile	967 ft.	23 ft.	631 ft.×65 ft. max. O.A. dimensions.
Republic-Lower East Side (East Bank Cuyahoga River, above Turning Basin)	Republic Steel Corporation	Unloading	No. 6 Fuel Oil	8 in.	261,900	2,000 ft.	967 ft.	23 ft.	631 ft.×65 ft. max. O.A. dimensions.

DENSITY: Fresh water.
MEDICAL: Doctors, hospital and all facilities available.
TANKERS: See Table.
FRESH WATER: Available at most berths.
FUEL: Marine gas oil and diesel oil readily available, ex-wharf or delivered by barge.
CONSULS:

Austria
Belgium
Canada
Colombia
Denmark
Finland
France
Germany (Federal Republic)
Italy
Japan
Korea
Norway
Sweden
Switzerland
United Kingdom
Yugoslavia

REPAIRS: All marine repairs can be effected. Dry dock 730 ft. length at Lorain, Ohio.
GENERAL: Refer to "St. Lawrence Seaway" for important general information.
AUTHORITY: Cleveland-Cuyahoga County Port Authority.

COOS BAY, Oregon: 43.22 N. 124.13 W.

DOCUMENTS: Local Port Authority does not require any documents from merchant vessels entering this harbour. This does not preclude United States Customs requirements for documents.
PILOTAGE: No specified amount of advanced notice of ETA required. Radio contact may be made on frequency 8182, also on frequency 2182. Most used frequency is VHF Channel 16. Pilot will be taken on board at entrance of Coos Bay channel. No designated anchorages for vessels awaiting a Pilot.
ANCHORAGES: Only anchorage in Coos Bay is South of buoy 23. Limiting draft 35 ft.
RESTRICTIONS: In November 1978 the inner channel will be 35 ft. depth.
MAX. SIZE: Max. permissible length is 725 ft. Breadth 110 ft. A 2 ft. clearance under keel is considered necessary for safe navigation. Vessels entering Coos Bay from sea draw down about 0.166 in. per foot of draft because of difference of density.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Pilots, Agents and stevedores monitor VHF Channel 16.
TUGS: Pilot vessel acts as Tug. Emergency small harbour tugs available and ship's lines generally used.
BRIDGES: 2 bridges cross the main ship channel. The Southern Pacific railway drawbridge 9 miles from the entrance and the Coast highway bridge 9.6 miles from the entrance. Clearance height of the highway bridge is 149 ft. in the centre of the span at MLW. Clearance width of swinging railway bridge 194 ft.
BERTHING: *Note:* All berths with the exception of oil berths will be dredged to 35 ft. by January 1st, 1979.

Cape Arago Dock: Length 504 ft. Depth alongside at MLW 22 ft. 6 in. (West end) and 25 ft. (East end). No dock cranes available. Fresh water available. Distance from entrance 5 miles.

Roseburg Lumber Co. Dock: Length, 635 ft. Depth alongside at MLW 35 ft. No fresh water available. Distance from entrance 8 miles.

Ocean Terminals Dock: Length, 400 ft. Depth alongside at MLW 33 ft. No dock cranes available. Fresh water available. Distance from entrance 11 miles.

Weyerhaeuser Dock: Length: (Lumber Dock) 1,433 ft. (Wood Chip Dock) 694 ft. Depth alongside at MLW 30 ft. No dock cranes available. Fresh water available. Distance from entrance 12 miles.

Fibrex and Shipping Co. Dock: Length of floating walkway 700 ft. Depth alongside at MLW 32 ft. Wood chip loaded by pneumatic pipe. Fresh water available. Distance from entrance 12.5 miles.

Bayshore Dock; Length 504 ft. Depth alongside at MLW 30 ft. No dock cranes available. Fresh water available. Distance from entrance 13 miles.

Dolphin Terminals: Vessels moor to dolphins adjacent to apron 60 ft. long and 26 ft. wide which is joined to the shore by a causeway length 190 ft. and width 12 ft. Depth alongside at MLW 30 ft. Fresh water available. Distance from entrance 13 miles.

Central Dock: Length 1,348 ft. Depth alongside at MLW 30 ft. No dock cranes available. Fresh water available. Distance from entrance 13.5 miles.

Portland Dock: Length 576 ft. Depth alongside at MLW 33 ft. No dock cranes available. Fresh water available. Distance from entrance 15 miles.

Coos Bay Dock: Length 1,326 ft. Depth alongside at MLW 30 ft. No dock cranes available. Fresh water available. Distance from entrance 15 miles.

STEVEDORES: Should have minimum of 48 hours to arrange gangs. Also see "Radio".
MEDICAL: Advance notice of required medical attention is desirable, in order to expedite use of ambulance, if necessary.
TANKERS: 2 tanker berths, Standard Oil and Union Oil Co., draft 30 ft. Tankers discharge into tank farms. Union Oil Co. is the bunkering Agent.
FRESH WATER: Available. Cost per ton is negotiable.
FUEL: 24 hours advance notice desirable, both bunker and diesel fuel available.
DEVELOPMENTS: Depth of channel at entrance 40 ft. Inner channel, to head of channel 30 ft. It is expected entrance channel to be dredged to 45 ft., inner channel to depth of 35 ft. (35 ft. channel will be completed in November 1978). An additional anchoraged will be installed, directly East of beacon 17.
GANGWAY/DECK WATCHMEN: Service of watchman at discretion of ship's master.
OPENING/CLOSING HATCHES: Normally by stevedores.
IDENTIFICATION CARDS: Not required by local authorities.
CONSULS: None.
REPAIRS: Only minor deck and engine repairs possible.
DRY DOCKS: Largest dry dock handles vessels not exceeding 125 ft.
REPATRIATION: Repatriation through local Customs and Immigration office.
AIRPORT: All docks within 5 miles of airport. Airport served by regular airlines.
TIME: GMT minus 8 hours, clocks advanced 1 hour on 1st May, clocks retarded 1 hour, 1st November.
HOLIDAYS: All legal holidays observed, plus state-wide elections. Cargo work through negotiations with stevedore contractors.
POLICE/AMBULANCE/FIRE: Police: Coos Bay 269-1181, North Bend 756-3161; Ambulance 756-3234; Fire Coos Bay 267-4123, North Bend 756-6111.
SHORE LEAVE: Crew members allowed ashore except when Federal directives may be applied to a specific vessel.
DELAYS: No delays in berthing, loading or discharging, or bunkering can normally be expected.
AUTHORITY: Administrator and Harbour Master, Port of Coos Bay.
AGENT: See "Portland", Oregon.

CORDOVA, Alaska: 60.33 N. 145.46 W.

Located at S.E. side of Prince William Sound. Open harbour year round.
APPROACHES: Via Prince William Sound.
DOCUMENTS: See "Anchorage, Alaska".

PILOTAGE: Pick-up point is Sheep's Point. Prior arrangements required.
MAX. SIZE: Recommend max. draft 25 ft. Tides: diurnal range 12.4 ft. Tide runs parallel to dock. Also see "Berthing".
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
ANCHORAGE: Good holding ground. Mud bottom between Spike Island and Municipal dock.
TUGS: Limited availability. Prior arrangements need to be made.
BERTHING: Berthing Permit required. Advance notice of 48 hours requested.

Municipal Dock: 18 ft. deep, 400 ft. long, 72 ft. wide. Open storage – 300 ft. × 45 ft. One 140 ton P & H mobile crane.
STEVEDORES: ILWU No. 66, Box 416, Cordova, Alaska, 99574. Telephone 907-424-7224.
REPAIRS: Radio, radar, welding, machining and light engine repairs can be effected.
WATER: Available.
FUEL: No bunker "C" available.
MEDICAL: 22-bed hospital and a medical clinic, with 2 doctors, 1 dentist.
CUSTOMS: Quarantine, local. Immigration and Customs from Anchorage, Alaska.
TRANSPORTATION: Regular air service, Charter air Service, Ferry to Valdez.
TIME: Alaska Standard.
POLICE/FIRE/AMBULANCE: Police telephone 907-424-3673; Ambulance/Fire telephone 907-424-3232.
AUTHORITY: Port Director.

CORPUS CHRISTI, Texas: 27.48 N. 97.23 W.

(See Plan Book)

PORT LIMITS: Corpus Christi's port limits include all of Nueces County, which has been officially designated as Nueces County Navigation District No. 1. The Corpus Christi turning basin, Avery Point turning basin, Chemical turning basin, Tule Lake turning basin and the Viola turning basin are interconnected by the Industrial Canal, the Tule Lake Channel and the Viola Channel and constitute the Corpus Christi Main Harbour. Other Bay points included in the port of Corpus Christi area are: Harbour Island, the North end of Mustang Island, near the inner end of the Aransas Pass entrance, and Port Ingleside and La Quinta along the route of dredged deep-water channels on North side of Corpus Christi Bay; and the Rincon Barge Canal System.

DOCUMENTS:
3 copies Cargo Manifest (Forms 7527–A or 7527–B), the original showing all cargo on board, and 2 copies showing only cargo for this port.
2 copies Crew Manifest (Form 1304).
2 copies Stores List (Form 1373).
2 copies Passenger List (Form I.–418).
2 copies Crew List (Form I.–418).

Customs boarding Officer will also examine Ship's Register and Load-line Certificate. In addition, the following documents will be required for formal entry to be made within 48 hours of arrival from abroad, or 24 hours from arrival from a United States port:
Health Pratique.
Master's Oath (Customs, 2 copies Form 1300).
General Declaration (2 copies Form 1301).
All Foreign clearances.
U.S. Certificates of payment of tonnage tax (Customs Form 1002).
Certified Crew List.

PILOTAGE: Pilot boards off Port Aransas.
RESTRICTIONS: No restrictions, 24 hour service. The port of Corpus Christi is situated on the West side of Corpus Christi Bay, in South-western Texas. Port facilities at Corpus Christi lie along a 9.5 miles stretch of dredged channels and basins about 18 miles from Aransas Pass entrance at the Gulf of Mexico, Channel depth 40 ft., width 400 ft.

Turning Basins: 3 turning basins in Main Harbour are each minimum 1,000 ft. wide and more than 1,000 ft. in length.
MAX. SIZE: Cargo vessels: 39 ft. draft. Tankers 39 ft. draft. (A tanker with a draft of 45 ft. 9 in. has docked). Harbour Island has tanker docks with 45 ft. draft. Also see "Berthing".

Maximum size tanker to date:

"Overseas Natalie"	L. 860 ft., B. 104.5 ft. L.D. 45 ft. 9 in. d.w.t. 72,254.
"Scandia Team"	L. 840 ft. B. 128 ft. L.D. 39 ft. 8 in. d.w.t. 108,000.
"Manhattan"	L. 1,005 ft. 6 in. B. 132 ft. 6 in. M.D. 52 ft. 9.75 in. d.w.t. 114,668.
"Intisar"	L. 886 ft. B. 142 ft. L.D. 56 ft. d.w.t. 140,999.
"Resolute"	L. 994 ft. B. 140 ft. L.D. 55 ft. 7 in. d.w.t. 150,900.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Brownsville Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: KLC ITT-Radio-Arcadia, Texas. KLC RCA-Radio-Galveston, Texas.
VHF: KKQ 769 – Harbour Master – Channel 12 and 16. WR 8879 – Aransas-Corpus-Christi Pilots Channel 12 and 16. KVP 384 – Harbour Tugs – Channel 12. U.S. Coast Guard – Channel 16.
TUGS: Tug assistance available. Tugs join vessels berthing at Harbour Island in jetty channel. Tugs accompany vessels entering Inner Harbour outside Corpus Christi Harbour Bridge.
BERTHING: The Corpus Christi Turning basin is over a mile long and 1,000 ft. wide. There are 4 additional basins in main harbour, which extends Westward from Corpus Christi Harbour Bridge for 9.5 miles. The water in all basins, channels and canals is 40 ft. deep, enabling port to handle largest merchant ships operating in Gulf trade.

Depth alongside docks:

Southside Docks 1–8	32 ft.	Northside Dock 9, 10 & 11	32 ft.
Southside Docks 14 & 15	36 ft.	Bulk Materials Dock	38 ft.

Note: Staging area back of cargo docks 14–15 for storing containers, vehicles, etc.
Inner Harbour – Public Docks; The length limit indicator is not of necessity the max. length for a vessel as larger vessels can berth if adjacent berth is not occupied.

Cargo Docks No.	*Length Limit ft.*	*Max. Draft ft.*
1 – 2	700	28
3 – 6	1,300	29
8	600	28
9	750	30
10 – 11	700	28
12	700	19.5
14 – 15	1,000	29
Bulk Materials Dock		Max. Length 835 ft.
Public Grain Elevator Dock		Depth 34 ft.

Inner Harbour – Private Docks:
PPG Industries Inc., Cargo Dock: Length of pier 450 ft. Length of Head 100 ft. Depth, East-side 30 ft. West-side 27 ft. and Head 34 ft. Producers Grain Port Terminal Dock: Depth 41 ft. Lone Star Cement Corp. Dock: Slip dredged to 14 ft.
Outside of Inner Harbour – Private Docks:
Dupont Barge Wharf No. 1: Dredged to 14 ft.
Dupont Barge Wharf No. 2: Dredged to 20 ft.
Reynolds Metals Co. Docks: Bauxite Unloading Pier dredged to 40 ft. Alumina Loading Dock dredged to 38 ft.
TANKERS: Between Corpus Christi Turning Basin and Viola Basin are 12 public and 6 private Oil Docks, some capable of berthing tankers of 150,000 d.w.t. capacity.
Inner Harbour – Public Docks:

Oil Dock	No. 1	Length Limit	800 ft.	Max. Draft	33 ft.
	No. 2*	Length Limit	350 ft.	Max. Draft	28 ft.
	No. 3**	Length Limit	430 ft.	Mid Depth	25 ft.
	No. 4†	Length Limit	850 ft.	Mid Depth	37 ft.
	No. 5	—	—	Depth (MLT)	27 ft.
	No. 6*	—	—	Depth (MLT)	9 ft.
	No. 7†	Length Limit	850 ft.	Depth (MLT)	36 ft.
	No. 8	Length Limit	1,000 ft.	Max. Draft	37 ft.
	No. 9	Contact Harbour Master		Max. Draft	33 ft.
	No. 10*	—	—	Max. Draft	12 ft.
	No. 11†	Length Limit	850 ft.	Min. Depth	37 ft.
	No. 12*	—	—	Min. Depth	9 ft.

*Limited to barge operations. **Exclusively for barges. †Larger vessels may be berthed when adjacent berth not occupied.
Inner Harbour – Private Docks:
Mobil Oil Dock: Limitations not known.
Southwestern Refining Co., Oil Dock No. 3: Depth at MLT 41 ft.
Southwestern Refining Co., Oil Dock No. 2: Depth at MLT 41 ft.
Southwestern Refining Co. Oil Dock No. 1: For barges, depth 10 ft.
Champlin Petroleum Co.: Oil Dock No. 1: Depth at MLW 40 ft.
Champlin Petroleum Co.: Oil Dock No. 2: For barges, depth 16 ft.
Champlin Petroleum Co.: Oil Dock No. 3: Depth at MLT 40 ft.
CPC International, Inc., Liquid Cargo Dock: Depth at MLT 40 ft.
Outside of Inner Harbour – Private Docks:
American Petrofina: Length Limit 750 ft. Slip depth 53 ft. below MLT (Reported 1974).
Exxon, Oil Dock No. 1: Depth 40 ft at MLT.
Exxon, Oil Dock No. 2: Depth 14 ft. – 22 ft. at MLT.
Sun Pipe Line Co.: Depth 40 ft. at MLT.
Dupont Ship Wharf: Dredged to 39 ft.
CARGO GEAR: *Heavy Lift facilities:* Derrick at Cargo Dock 14 has 100 tons capacity at 53 ft. radius, can handle containers, 40 ft. or larger. Locomotive cranes (5) 30 tons capacity.

Facilities are available for all types of liquid cargo, dry bulk and general cargo, except cannot handle restricted cargo such as ammunition and explosives.
BRIDGES: Corpus Christi Harbour Bridge; vertical clearance at MHW is 138 ft.

Upper Harbour Lift Bridge: Vertical clearance at MHW when raised is 138 ft.
FRESH WATER: Available.
FUEL: 1,500 Redwood, 1,000 Redwood – 24 hour notice.

Bunker C, Marine diesel, Light diesel – Pipe-line or Barge, Truck.
FIRE PRECAUTIONS: No working barges alongside (except bunkering barges) and normal precautions as shut down cargo operations during lightening storm, etc.
SURVEYORS: American Bureau of Shipping and J. E. Orrell, Lloyds Sub-Agency.
GANGWAY/DECK WATCHMEN: Not necessary. If recommended $4.00 per hour.
HATCHES: Hatches may be opened by crew before entering harbour, after the ship has entered harbour it is carried out by stevedores.
CUSTOMS ALLOWANCE: 300 cigarettes per man. 1 quart liquor per man.

Mooring facilities: Berth No. 1 is a 6-point mooring and is used for transfer of refined stock, primarily lube oils and chemical. The unlighted spare buoys mark the offshore end of the pipe-lines, which carry the telephone line, and is located approximately 1 mile East of the sea buoy. There are also 3 hose marker buoys, one for the end of the chemical hose string and one for the end of each lube oil strings. The chemical hose string consists of seven 8 in. diameter × 25 ft. lengths. The lube oil strings are a parallel set of seven 8 in. diameter × 25 ft. lengths which are connected at the ship-end by a piping manifold which the ship provides.

Berth No. 2 is a 5-point mooring and is used for transfer, of light oils (primarily gasoline and jet fuel). It is located approximately 700 yards N.W. of Berth No. 1.

Berth No. 3 is a 7-point mooring used for the transfer of fuel and crude products. It is located approximately 750 yards West of Berth No. 2, and 2,400 yards offshore.

Berths Nos. 2 and 3 are each equipped with 2 unlighted spar buoys and a can buoy. The spar buoy closer to land is the pipe-line spar to which is fixed a land-line telephone cable providing communication between the vessel's deck to the land. The seaward spar buoy marks the location of the offshore end of the submarine hose when the hose is on the bottom. A can buoy, or hose marker buoy, is connected to the end of the submarine hose by a chain. The submarine hose string in Berth No. 2 consists of nine 12 in. diameter×25 ft. lengths of which one is over-the-rail, connected to the seaward end of a 16 in. submarine pipe-line leading to the shore facility. The submarine hose string in Berth No. 3 is connected to the seaward end of a 26 in. submarine pipe-line and a 12 in. line for circulation, by seven 16 in. diameter × 25 ft. lengths of hose followed by one 12 in.×25 ft. length hose and one 12 in. diameter × 30 ft. long over-the-rail hose.

Berth No. 4 is equipped with 2 unlighted spar buoys and 2 unlighted can buoys. The inshore spar buoy marks the end of the 36 in. submarine line and 14 in. circulation line. Two hose strings come off the main 36 in. submarine line, the Northern string of which is 10 ft. North of the centre line of the 36 in. main and of the other hose. Each hose string consists of 5×35 ft. long lengths of 20 in. hose, followed by a reducer and then 2×25 ft. long lengths and 1×30 ft. long over-the-rail length of 16 in. hose. The end of each hose string is connected to a can buoy by a chain. Berth No. 4 is not equipped with cable phone service but relies instead on radio-telephone.

Hose Handling: The vessel will be expected to have suitable equipment on deck and ready for making the connection to the submarine hose.

Berths No. 1 and 2 require lifting capacity of at least 5 long tons.

Berth No. 3 requires a lifting capacity of at least 7 long tons for vessels up to 30,000 d.w.t. and at least 8 long tons for vessels over 30,000 d.w.t.

Berth No. 4 requires a lifting capacity (calculated load) of 10 long tons.

Procedure for discharging; At the completion of most cargo discharges the vessel will be required to receive a 150 bbl. hose wash displacement of cutter stock or gas oil. This is to prevent the hose from plugging while not in use.

Product transfer rates, Pressure and temperature: Lubricants and chemicals are transferred at Berth No. 1 at varying rates depending on the particular product, the maximum rate being approximately 2,100 bbls.p.h. Hoses are rated to 275 p.s.i.

Gasoline and jet fuel loaded at Berth No. 2 are usually transferred at 7,000–12,000 bbls.p.h. with a pressure at the ship's rail not to exceed 50 p.s.i. Gasoline and jet fuel are discharged at Berth No. 2 with a pressure not to exceed 125 p.s.i. at the ship's rail. Hoses are rated to 150 p.s.i.

Fuels and crude are loaded at Berth No. 3 at rates to 20,000 bbls.p.h. No. 3 Berth hoses are heavy duty 275 p.s.i. rated. Vessels are expected to maintain discharge pressure of at least 125 p.s.i. at the ship's rail and/or a flow rate of 20,000–25,000 bbls.p.h.

No. 4 Berth hoses are heavy duty 275 p.s.i. rated, and the system has a normal working pressure of 180 p.s.i. On this 2 hose system, vessels are expected to maintain flow rates of 50,000–60,000 bbls.p.h. Because of high velocity hose damage, the maximum flow through a single 16 in. hose will be limited to 32,000 bbls.p.h.

Sumatran crude cargo will not be accepted by the facility unless the ship's average tank temperature is at least 125° F. However, the average temperature for Sumatran crude should not exceed 130° F. in order to avoid excessive vaporization of the light fractions in the crude. Heavy viscous residue fuel cargo will not be accepted from a ship unless the ship's average tank temperature is at least 130° F.

MEDICAL: Several hospitals are available in the area. US Coast Guard or local ambulance service may be expected to know what hospital is best suited to handle a particular emergency.

FRESH WATER: Potable water is not available at this mooring. Water barge service is not available in the area. Closest supply is the harbour at San Pedro.

FUEL: Bunker fuel for ship's use is not available in the moorings of the El Segundo Marine Terminal, but may be arranged through Chevron Shipping, San Pedro.

BALLAST: No ballast can be accommodated at the Terminal.

CONSULS: Consulates of most of the maritime Nations are maintained in both the cities of Los Angeles and Long Beach.

AIRPORT: The Terminal is located approximately two miles South of Los Angeles International Airport.

TIME: Standard Time along the entire West Coast of the United States is GMT − 8 hours. Daylight Saving Time is used all along the coast. Clocks are advanced 1 hour in Summer.

WINDS/TIDES/CURRENTS: *Winds:* Westerly, onshore winds usually prevail. Gales are very rare in Santa Monica Bay, but the local thermal winds blowing from a Northerly direction sometimes necessitate interruption of transfer operations and require moving a ship from the mooring to anchor.

Northerly winds occur during the period from October through May.

In the Autumn and Spring, duration averages 4 to 6 hours

In November, December and January, duration averages 10 hours.

Velocities up to 52 knots have been recorded.

Tides and currents: Normal tides of approximately 6 ft. pose no significant problems in this open roadstead.

Currents run unpredictably North or South along the coast in the vicinity of the Terminal. The current is most commonly from North to South and is stronger in Summer than in Winter.

TELEPHONE: Each berth is equipped with telephone service. For berths No's 1, 2, and 3 it is via cable which connects direct to the refinery system and then terminates at the inshore spar buoy at each of the respective moorings. In the case of berth No. 4 it is via radio-telephone which goes directly into the refinery PBX system. The telephone instrument is delivered to the ship by the mooring launch at the same time as the hose connecting equipment is delivered.

To call El Segundo Terminal, dial 2233.

To call local outside numbers within the Los Angeles area, dial 9 followed by the 7-digit number.

To call long distance, dial 0 between 0700 and 1800 or dial 2505 between 1800 hrs. and 0700 hrs.

The vessel may be reached from outside by calling the El Segundo Refinery at (213) 322–3450 and requesting extension 2831, 2832, 2833, or 2955 for Berths 1, 2, 3 or 4 respectively.

GENERAL: *Supplies:* Modest quantities of supplies may be taken aboard while at the moorings if absolutely necessary, provided the Mooring Master gives prior approval. This practice is discouraged in view of the sea swell and wind conditions that can develop in the open roadstead of the moorings, as well as the long distances to normal marine supply facilities.

Launch service: A company operated launch may be chartered for vessel's use through the vessel's Agent at the option of the owner's representative. This launch operates between the moorings and the Port-O-Fino Dock in King Harbour, Redondo Beach, on a published 4 hours schedule which may be obtained from the Mooring Master. A one-way trip takes approximately 40 minutes. There is a waiting room for use by all tanker personnel awaiting the launch. The waiting room is in the second building facing the yacht moorings. Blue arrows are painted on the side walk between this waiting room and the launch ramp, to assist in identifying the waiting room.

Pilot Ladder: The vessel shall rig a safe and secure Pilot ladder for the Mooring Master and Government officials to use in boarding and leaving the vessel.

Air Pollution: Any vessel showing visible smoke in excess of 3 minutes is in violation and may expect to be cited and required to pay substantial fines.

Dumping of garbage: Dumping of rubbish or garbage overboard within 50 miles of the coastline is prohibited.

ERIE, Pennsylvania: 42.10 N. 80.05 W.

(See Plan Book)

Refer to "St. Lawrence Seaway" for important general information.

PILOTAGE: Not compulsory. Seaway Pilots will assist if required.

RESTRICTIONS: Navigation season from 14th April to 26th December approx. The port is connected to Lake Erie by an entrance channel, depth 28 ft. Vessels size restricted by Seaway locks.

MAX. SIZE: 730 ft. length; 26 ft. draft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Quarantine Station.Quarantine procedure undertaken at Quebec City for incoming vessels from foreign ports.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Master must give at least 24 hours notice to Commander 9th Coast Guard District, Cleveland, Ohio, of the vessel's ETA at Snell Lock. Also, at least 24 hours notice of ETA at first U.S. discharge port is required.

TUGS: Available. Not compulsory, but sometimes necessary in bad weather.

BERTHING:

City of Erie Grain Elevator: Owned by the City of Erie, leased by the Port Authority, berthing length 980 ft., depth of water alongside 24 ft., 2.5 million bushel capacity.

Erie Marine Inc. (subsidiary of Litton): New ship assembly yard with graving dock (largest on Great Lakes), available for dry dock repairs.

Ore Dock: 1,000 ft. long, 26–27 ft. of water alongside. The ore dock has 2 clam shell buckets, unloaders and 1 ore bridge. 400,000 ton storage pad available for lease.

Port Authority East Bay Industrial Site: 75 acres available for sale or lease.

Erie International Marine Terminal: Leased to Codan Corporation, stevedores for the Port of Erie; 1,400 ft. long, with 28 ft. of water. Terminal used for bulk and general cargo; 23 acres; 750,000 sq. ft. of warehousing and transit sheds with truck and rail loading facilities; 140 and 125 ton mobile cranes equipped with

magnets, buckets and gear for heavy lifts, also 300 ton stiff leg crane. Terminal served by ConRail with reciprocal switching for N&W and B&LE railroads. A total of more than 100 acres of waterfront property is available where an industrial complex may be constructed.
DENSITY: Fresh water.
MEDICAL: All facilities available.
FRESH WATER: Obtainable by pipe-line at all docks.
FUEL: All grades available by pipe-line at all docks.
REPAIRS: Local shipbuilding company can handle most repairs. Dry dock available.
AUTHORITY: Erie-Western Pennsylvania Port Authority.

EUREKA, California: 40.48 N. 124.10 W.

(See Plan Book)

DOCUMENTS: In addition to the documents detailed below, Agent will present to Master normal Customs forms to be signed, such as Master's Oath, Permit to Lade, Inward & Outward Manifest, etc. These forms will be filled out by local Agent and Customs Broker and presented to local Customs house when entering and clearing vessel:

Foreign Flag Vessels: I. Entering from another U.S. port:
3 Crew Lists.
3 Passenger Lists (only if passengers on board).
3 Curio Lists.
3 Store Lists.
Permit to Proceed (issued at last U.S. port).
Travelling Manifest (only if there is foreign cargo on board).
Ship's Register.

II. Entering from a foreign port:
3 Crew Lists.
3 Passenger Lists (only if passengers are on board).
3 Curio Lists.
3 Store Lists.
Travelling Manifest.
Permit to Proceed.
Ship's Register.
Ship's tonnage tax Certificate.
Clearance from a foreign port.

PILOTAGE: Telegraphic address of Pilot station "Humbar". 24 hours advance notice of ETA; in case of change in ETA give minimum 4 hour notice. Contact pilot boat on VHF 156.8 (Channel 16) or radio watch on 2182. Radio watch is maintained 2 hours prior to arrival at sea buoy on Channel 16. Working Channels are 6, 13 and 18A.

No Pilot boat on station. Local Pilots use tug "Thor" length 65 ft. 800 h.p. Tug colours: black funnel, red and white superstructure and black hull. As no Pilot boat on station, sound signals not required. Visual international flag and light signals observed. Pilot will board vessel within 1 mile radius North, South and West of sea buoy. Sea-buoy located 1.4 miles from end of North jetty lined up with range lights bearing 105 degrees true.

Specific requirements: *(a)* Pilot ladder with spreaders in accordance with Solas regulations, and 9 ft. above water. *(b)* At night – brilliant light to illuminate ladder. *(c)* Recommended anchorage outside Humboldt Bay located 1 mile South of sea-buoy in 15 fathoms of water.

ANCHORAGES: Inside harbour, weather permitting. Light draft vessel (22 ft. or less) South of Fairhaven Dock (Crown Simpson) and West of Standard Oil Dock. Deep draft vessels (22 ft. to 32 ft.) will anchor North of Union Oil Terminal and South of Samoa Channel entrance buoys.
RESTRICTIONS: Humboldt Bay is a 24 hour port; restrictions if any would depend upon manoeuvrability and horsepower of vessel during peak tide. Range of tide normally 8 ft. extreme cases 10 ft.
MAX. SIZE: Max. LOA 740 ft. max. beam 115 ft. Max. draft 35 ft.
HEALTH: See "Health: All ports" before first U.S.A. port (Albany). Illness reports made to Chicago Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Send cables through one of the following stations:

ITT World Communications, Inc. – San Francisco Marine Radio Station KFS.

RCA Global Communications – San Francisco Marine Radio Station KPH.

TUGS: 3×800 h.p. tugs available, 1 tug acts as pilot boat, other tug joins vessel when in harbour. Tug lines are normally used, occasionally a ship's line is used. No extra charge assessed for use of tug's line. Depending upon size of vessel and weather conditions, Pilots will use 1 or 2 tugs.
BERTHING: No specific requirements relating to berthing; normal procedures prevail. Vessel normally docks stemming the tide.

Presently available berths at Eureka as follows:
Crown-Simpson Pulp Co.
Eureka Forest Products
Louisiana-Pacific Corporation.
Humboldt Dock & Shipping Co.
Kramer Lumber Sales
Olson Terminal
Standard Oil of California
Union Oil of California
North Coast Exporting Co.

Harbour channels maintained to 35 ft. zero tide. Most of berths at above-mentioned docks also maintained at 35 ft. zero tide; however, some occasionally fill in and recommended check with Agent as to depth available at specific dock which vessel intends moor and load.
STEVEDORES: 10 local gangs available. Groups ordered at 0630 hrs. in the morning for both day and night gangs. Therefore essential that local Agent or stevedore company receives accurate ETA by 0600 hrs. in the morning. Normally, vessel will advise arrival sea-buoy with a 24-hour ETA and correct ETA at a later time if necessary. The basic commodities exported from Eureka are woodpulp, logs and lumber.

Westfall Stevedore Co. Cable Address: Westfall, Eureka. Tel. (707) 443-5688.

MEDICAL: Not necessary for Agent to receive advance notice of required medical attention unless ambulance and doctor are required on arrival. 3 hospitals in immediate area. Inoculation and vaccination certificates should be up-dated.
TANKERS: 2 tanker berths available: Standard Oil of California – deepest draft 35 ft. at zero tide. Union Oil – deepest draft 35 ft. at zero tide. Normally only Company tankers use own facilities. Facilities privately owned and are not available for bunkering other vessels.
DENSITY: Pure salt water. No fresh water allowance on any tide.
FRESH WATER: Available all berths. Delivery by hose. Rate of delivery: 10 t.p.h.
FUEL: If bunkers required, Agent must go through major contractors, who in turn will inform their local supplier of requirements. Generally speaking bunkers are only supplied to vessels on an emergency basis in limited quantities. The bunkers usually diesel grade and delivered by truck on a prearranged schedule.
DEVELOPMENTS: Deepen North bay channel to 35 ft. and widen bends in channel at channel miles 0.74 and 2.6. Deepen Samoa channel and outer reach of the Eureka channel to 35 ft. Provide an anchorage area in North bay, at a suitable location between jettied entrance channel and Gunther Island, 35 ft. deep, 1,200 ft. wide and 1,200 ft. long. (The developments were completed on July 1st, 1978).
GANGWAY/DECK WATCHMEN: Services of gangway guards available if required by ship.
OPENING/CLOSING HATCHES: Normally stevedores' work unless done prior to docking. Vessel's crew may assist in opening and closing hatches, if hatches require special attention.
CERTIFICATES:
Ship's register.
Load-line Certificate.
valid Derat Certificate.
Cargo Gear Certificate.
Tonnage Tax Certificate and all other usual certificates required.

CUSTOMS ALLOWANCES: Tobacco, 200 cigarettes and 1 lb. of tobacco. Wine and/or Spirit, 1 bottle (approx. 1 quart).
CARGO GEAR: Must be in good order and safe operating condition and all cargo gear certificates must be valid.
IDENTIFICATION CARDS: Alien seamen require Crewman Landing Pass (U.S. Form I-95).
CONSULS: None. Nearest consuls at San Francisco.
REPAIRS: Small welding jobs, and minor machine work only. Major repairs normally carried out in San Francisco.
DRY DOCKS: None.
REPATRIATION: Normally done in conjunction with San Francisco, Portland, Los Angeles or Seattle Agent.
AIRPORT: Airport located approximately 20 miles North of Eureka. Limousine service available. Major airline, Air West. At present 3 flights per day to San Francisco and 1 flight per day to Portland.
TIME: Eureka local time is Pacific Standard Time and is GMT minus 8 hours. However, from the last Sunday in April to the last Sunday in October, Eureka is on Daylight Saving Time.
HOLIDAYS: No work performed on following holidays: New Year's Day (January 1st); Labour Day (1st Monday in September); Thanksgiving Day: Christmas Day (December 25th).
POLICE/AMBULANCE/FIRE: Eureka City Police 442-4545; Eureka City Ambulance 442-4551; Eureka Fire Department 443-5656; Humboldt County Sheriff Department 443-5671; Arcata Fire District 822-2424; Humboldt Fire District No. 1 442-1212.
TELEPHONES: No arrangements for placing telephones on board; however, there are pay phones nearby at each dock as well as phones in nearby offices.
SERVICES: Specific services such as tank cleaning, compass adjusting, tank washing,etc., are not normally performed in the port of Eureka and are usually performed in one of the close major ports such as San Francisco; however, there are facilities available for minor repair.
SHORE LEAVE: Crew members allowed ashore unless restricted for Customs or Immigration reasons.
DELAYS: Berthing delays seldom incurred primarily due to the fact that the prime Agents are always in contact with the local Agent at Eureka informing them of vessel's ETA and prime Agent is always advised with regard to all arrivals and possible berth conflicts at this port.
AUTHORITY: State of California, Board of Harbor Commissioners for Humboldt Bay.
AGENT: See "San Francisco".

EVERETT, Washington: 47.59 N. 122.13 W.
(See Plan Book)

DOCUMENTS, PILOTAGE, etc.: Refer to "Tacoma".
PILOT: Boards off Port Angeles pilot station.
ANCHORAGE: Unlimited deep water anchorage in Possession Sound.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Available, join vessel off berth. 17 tugs, 150 to 900 h.p.
BERTHING:

Pier No. 1 South: Useable berth length 600 ft.; Approach water depth 90 ft.; Water depth at pier 35 ft. MLLW; Plank and piling; 20 ft. Apron; Transit shed with 57,960 sq. ft. on pier; Access by road, barge and rail.

Pier No. 1 North: Useable berth length 520 ft.; Approach water depth 90 ft.; Water depth at pier 40 ft. MLLW; Multi-purpose 35-ton bridge crane (Containers, bulk ores); Rail spur on dock; Plank and piling; 40 ft. Apron; Transit shed with 57,960 sq. ft. on pier; Access by road, barge and rail.

Pier No. 3 South: Useable berth length 750 ft.; Approach water depth 90 ft.; Water depth at pier 40 ft. MLLW; Cement piling and blacktop surface; 120 ft. Apron; Access by road and barge.

Pier No. 3 North: Useable berth length 450 ft.; Approach water depth 90 ft.(+); Water depth at pier 40 ft.; Plank and piling; 15 ft. Apron; Access by road, rail and barge; Rail spur on dock.

Pier "B": Useable length 450 ft.; Approach water depth 30 ft.(+); Water depth at pier 40 ft.; Plank and piling; 50 ft. Apron; Access by road and barge.

Pier "D": Useable length 500 ft.; Approach Water depth 30 ft.; Water depth at pier 50 ft.; Two 35-ton Whirley cranes; Plank and piling construction; 45 ft. Apron; Access by road and barge.

Pier "E": Useable length 450 ft.; Approach water depth 30 ft.; Water depth at pier 40 ft.; Plank and piling construction; 45 ft. Apron; Access by road and barge.

STEVEDORES: 11 local gangs, additional gangs may be imported if required.
HOLIDAYS: See "Tacoma".
MEDICAL: Doctors and local hospital available.
DENSITY: Changes daily as port is at the mouth of a fresh water river.
FRESH WATER: Available at wharves.
FUEL: Available by barge from Seattle.
GANGWAY/DECK WATCHMEN: Required only if detainees aboard.
CUSTOMS ALLOWANCE: No definite quantities prescribed; reasonable allowance at discretion of Customs Inspector.
AIRPORT: Seattle–Tacoma International Airport is 45 miles South of city of Everett on excellent highway. Driving time is approx. 45 minutes.
POLICE/AMBULANCE/FIRE: Port of Everett Security: 259–3164; Everett City Police: 259–8711; Everett City Fire Dept.: 252–1111; Ambulance Service: 252–1234.
TELEPHONES: Will be placed on board vessel on request. Charges are made only for calls made. Arrangements should be made through ships Agent.
SHORE LEAVE: Crew members are able to visit Everett at all times.
AUTHORITY: Port of Everett.
AGENT: See "Seattle".

FALL RIVER, Mass.: 71.10 W. 41.42 N.

DOCUMENTS: If first port of call in U.S., 2 complete Custom's Manifests describing all cargo on board and ports of discharge. Also 1 Cargo List for Fall River cargo; 3 Crew's Lists; 3 Stores Lists; 3 Curios Lists; the Ship's Register, Load-line Certificate and Tonnage Tax Certificate.
PILOTAGE: Vessel first contact ship's Agent for Pilot and tug arrangements. R.I. State Pilots Association radio call letters KDF-375 on frequency 156.9 kc/s., Channel 18. Usual Pilot pick-up is at Brenton Reef Light Tower off Newport, R.I.
RADIO: Chatham Radio or Amagansett Radio.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Boston Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Tugs for N.E. Power Station met at Buoy 6; all other berths North, meet tugs at Buoy 10. Tugs provide own lines at no extra charge.
BERTHING: Vessels berth at State Pier. Depth alongside 35 ft.
BRIDGES: All bridges have 135-ft. clearance with exception of Brightman Steel Bridge at approach to Montaup Electric Co. and Shell Oil docks. This bridge has a draw clearance of 97.5 ft. and passage allowed for vessels with less than 75 ft. beam. No unusual requirements. Practice is to depart on flood tide. (See "Developments".)
TANKERS: Berth at Shell Oil Docks, Depth alongside 32 ft.
FRESH WATER: Available at most berths. State Pier delivery is at 125-pounds pressure.
OPENING/CLOSING HATCHES: Usually performed by stevedores.
CERTIFICATES: All certification of vessel, safety conditions and radio facilities should be available for U.S. Coast Guard.
CARGO GEAR: No additional safety requirements.
TELEPHONES: Available at most berths. Contact Agents.
DEVELOPMENTS: Plans for construction of a new 300-ft. wide draw bridge to replace the existing Brightman Street Bridge. This will mean unobstructed use of the entire port area.
SHORE LEAVE: Permitted, but consult Agents.
IDENTIFICATION CARDS: Standard U.S. Immigration Forms I.95 to be made up for each crew member on arrival. Not necessary for crew man already holding Form I.95. issued for the same vessel.
TIME: Eastern Standard Time, GMT minus 5 hours. Daylight Saving Time, GMT minus 4 hours from April to October.
HOLIDAYS: New Year's Day (January 1st); Washington's Birthday (February 22nd); Patriots' Day (April 19th); Memorial Day (May 30th); Independence Day (July 4th); Labour Day (1st Monday in September); Columbus Day (October 12th); Veterans' Day (November 11th); Thanksgiving Day (last Thursday in November); Christmas Day (December 25th); or any day celebrated in lieu thereof.
AUTHORITY: Fall River Port Authority.

FERNDALE, Washington: 48.49 N. 122.43 W.

Mobil Oil Tanker Terminal

DOCUMENTS/HEALTH/etc.: Refer to "Seattle".
PILOTAGE: Compulsory. Pilot boards at Port Angeles.
TUGS: Tug escort required if vessel is loaded and is larger than 40,000 d.w.t. Tug horsepower must be 5% of d.w.t. Available up to 3,000 h.p. Additional tugs ordered from Seattle if required.
RESTRICTIONS: Vessels enter any hour day or night.
MAX. SIZE: Length 1,000 ft.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
BERTHING: Terminal used for crude and product discharging. Vessels berth alongside finger pier, lines to quick release hooks. Inner berth for barges only. Outer berth 900 ft. long, depth alongside 40 ft. at MLW. Dirty ballast water 3,000 long tons with prior notification.
AGENT: See "Seattle".

FORT PIERCE, Florida 27.27 N., 80.19 W.

SHIPMASTER'S REPORT: January 1979.

PILOTAGE: Compulsory. Pilot boards at sea buoy. Send vessel's ETA to Agents 72 hours, 48 hours and 24 hours prior to arrival. (The Master undertook berthing operations).
ANCHORAGE: Vessel anchors and awaits Pilot 0.5 mile seaward of sea buoy.
RESTRICTIONS: Vessel is able to berth and unberth during hours of darkness if the weather is clear. The leading lights are good but the channel is narrow and marked by unlit buoys. This vessel being the largest vessel to berth waited for daylight to turn and sail. Diameter of turning basin 1,000 ft. Least depth of water in the channel from sea to berth 26 ft. (dredging in progress).
MAX. SIZE: Max. draft 25 ft. (1 ft. keel clearance in the turning basin required). Range of tide 1 ft. 3 in.
TUGS: One 500 h.p. tug available. Not advisable to manoeuvre without use of tug.
RADIO: Lantana Radio.
VHF: Channels 16 and 13. Watch only maintained when vessel expected.
BERTHING: The berth is located in Fort Pierce inlet. Length of jetty 411 ft. At present only 1 berth available on the North side of the jetty. Dredging is under way on the South side. Distance from entrance to berth 3 miles.

This vessel overhung the jetty by 100 ft., all moorings were placed on the jetty and vessel lay quietly alongside. However, with a S.E'ly wind it may be difficult to keep the after end of the vessel alongside. Vessels are able to dock and undock at any stage of the tide, however, if vessels draft is over 24 ft. suggest vessels wait for high water.

CARGO HANDLING FACILITIES: There are no facilities for bulk cargoes. No quay cranes and no Ro/Ro facilities. There is sufficient mechanical equipment for handling palletised cargoes. There is no equipment or storage space for containers. An insulated storage shed is presently being built at the jetty.
FRESH WATER: Available.
FUEL: Not available in the port but could be supplied by barge from Fort Lauderdale.
MEDICAL: Doctor and hospital available.
AIRPORT: Local airport 15 miles from port, nearest international airport is at Miami.
SERVICES: Fresh provisions, laundry services, groceries and meats available.
REPAIRS: No facilities available.
GENERAL: Fort Pierce harbour is at present in the early stage of development. For many years the port has been used only for barge traffic and small craft and the inlet allowed to silt up. Over the last year a company, DNE Sales International, headed by Mr. Eagan has bought the jetty and the adjacent land for the initial purpose of exporting Florida citrus, many local plantations of which are owned by Mr. Eagan.

The jetty has been completely rebuilt, and is 411 ft. long, of solid construction with good fendering. An insulated holding shed is in the process of being built which should be completed shortly. Only the North side of the jetty has been dredged, the South side being dredged at the present.

The Stevedoring company packing sheds are all owned by DNE Sales International who also plan entrance into ship chandlery.

At present depths in the turning basin which is approximately 1,000 ft. are no more than 26 ft. and the basin is not marked at its extremities so care should be taken to swing as near as possible on the leading lights. Alongside the wharf depths are 27 ft. with soft sand bottom and in the channel the least depth is 26 ft. but there are no official surveys yet in print. The latest information on U.S. chart 11475 gives depths of 25.7 ft. in entrance range and 20.5 ft. to 22.3 ft. for Inner range, latest information in British Notices to Mariners gives 20 ft. depth, however prior to arrival I received by telex from the Agents advice that least depth was 26 ft. which was confirmed by Pilot and our echo sounder.

The buoys marking the edge of channel are unlit, although U.S. chart shows lighted buoys. When I enquired via Agents from U.S. Coastguards they *stated* they would report same and agreed with me that on a dark night they were a hazard for a large vessel, but would not commit themselves.

The tug is very low-powered but is necessary to swing the vessel, we also used the pilot launch to assist. With little water under the ship the vessel was very sluggish when turning, in strong winds this manoeuvre could be difficult.

One is aware that it is early days for this port, dredging is in progress and if all the projected improvements are carried through, including the deepening of the channel Fort Pierce will be a safe and efficient port. The controlling factor for "fruit vessels" is the length of the jetty, however if exports increase as anticipated there is a proposal to lengthen the jetty by 100 ft.

The vessel entered Fort Pierce at 0615 hrs., transitting the channel in semi-daylight. For departure the Master considered the same daylight conditions essential for safety reasons having assessed the weather and all other factors as stated.

Stevedores are good but at present lack expertise of citrus loading.

All agency and stevedoring personnel are keen, helpful and anxious to co-operate fully to promote good relations.

FREEPORT, Texas: 28.57 N. 95.21 W. (See Plan Book)

DOCUMENTS: Handled at Freeport.
PILOTAGE: VHF Channels 6, 8, 12, 13, 14, 16 – at sea buoy – Pilot Office (tel. 233-1120) – 200 West 2nd, Freeport, Texas; – Pilot boards 0.25 mile North of sea buoy. Anchor 1 mile from end of sea buoy if awaiting Pilot.
ANCHORAGES: 1 to 2 miles from end of sea buoy.
RESTRICTIONS: Depth 36 ft. at bar.
MAX. SIZE: Length 670 ft., draft 36 ft. for ships from bar to within upper turning basin, 30 ft. from upper turning basin to Public Facilities. Tide governing these dimensions – plus or minus 3 ft.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Galveston Marine Operator.
TUGS: Join vessel at shore line. Tug's lines to be used, and no charge for use.
BERTHING: 1 hour to reach berth. Deep water terminals at Public Facilities consist of 1,250 linear ft. of deep water bulkhead wharf with 2 modern transit sheds each 400 ft. long, 150 ft. wide, and 1 berth of 250 linear ft. of deep water bulkhead wharf with transit shed of 204 ft. long and 180 ft. wide. In addition a back-up warehouse is available consisting of 60,000 sq. ft. The 2 large transit sheds and back-up warehouse have railroad tracks under cover, permitting all-weather work and preventing cargo damage.

The Navigation District owns a total of 1,106 acres of land for future Port and industrial development, 2,400 ft. of this land is situated on the Brazos River.

CRANES: Vessel is required to use own gear, shore-cranes are available in area for hire.
STEVEDORES: Obtained through Agent.
MEDICAL: Obtained through Agent and advance notice required. Doctors, hospital available.
DENSITY: 1020.
FRESH WATER: Available ex wharf at Brazos Harbor.
FUEL: All grades available by barge from Houston.
GANGWAY/DECK WATCHMEN: None required but available through Agent.
OPENING/CLOSING HATCHES: Stevedore contract.
CUSTOMS ALLOWANCE: Local Customs Agent control.
IDENTIFICATION CARDS: None needed.
CONSULS: None. Nearest at Port Arthur or Houston.
REPAIRS: Available.
DRY DOCKS: None.
REPATRIATION: Possible, through Agent.
AIRPORT: Houston Intercontinental Airport – Houston, Texas (80 road miles to Brazos Harbor; Metro Airlines – Shuttle to Lake Jackson, Texas (8 miles from Brazos Harbor).
TIME: GMT minus 6 hours. Daylight saving time starts last Sunday in April and ends the last Sunday in October – GMT minus 5 hours.
HOLIDAYS: New Year's Day (January 1st); Martin Luther King's Birthday (January 15th); Lincoln's Birthday (February 12th); Washington's Birthday (Third Monday in February); Good Friday; Texas Independence Day (March 2nd); St. Patrick's Day (March 17th); Decoration Day (Last Monday in May); Emancipation Day (June 19th); Independence Day (July 4th); Labour Day (First Monday in September); Columbus Day (Second Monday in October); Veteran's Day (Fourth Monday in October); Thanksgiving Day (Fourth Thursday in November); Christmas Day (December 25th). No work on Christmas Day or Labour Day.

If any of the above holidays fall on Saturday or Sunday the following Monday will be recognized as the holiday.

POLICE/AMBULANCE/FIRE: Police 233-5434; Fire 233-2651; Ambulance Service 233-4700.
TELEPHONES: No arrangements exist for placing telephones on board.
SERVICES: Tank-cleaning facilities available locally. Compass adjusting available from Houston, Texas.
SHORE LEAVE: Crew members allowed ashore.
AUTHORITY: Brazos River Harbor Navigation District.

GALENA PARK, Texas: 29.44 N. 95.14 W.
Refer to "Houston".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

GALVESTON, Texas: 29.17 N. 94.50 W.
(See Plan Book)

DOCUMENTS:
1 visaed Crew List.
3 Passenger Lists.
3 or more copies of complete Manifests of Cargo for discharge at all United States ports.
2 or more copies of Manifest of Cargo for each United States port.
1 Souvenir List.
1 Stores List.
Ship's Register.
Tonnage Tax.
Load Line Certificate.
Nationality Certificate.
No health document required.

PILOTAGE: Radio to local Agent who arranges Pilot and specifies boarding time. United States Coast Guard require 24 hours notice of arrival at Galveston Bar. Contact pilot boats and pilot station on VHF Channel 12. Pilot boats marked HP No. 1, 53 ft. long; HP No. 2, 61 ft. long; HP No. 3, 106 ft. long. Pilot boats can be signalled by light in international code. Pilot taken on board at sea buoy No. 1 located 6.7 miles from Galveston.
ANCHORAGE: In Bolivar Roads, 6.7 miles inwards from sea buoy No. 1. Depths 32-34 ft.
RESTRICTIONS: Prolonged North winds can reduce water level as much as 4 ft. in Winter. Channel depth 40 ft.
MAX. SIZE: No length restrictions. Draft according to berth depth.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: International Telephone and Telegraph station Galveston, call sign KLC.
TUGS: Available if required.
BERTHING:

Grain elevators	Port Richmond El. Co.	Depth alongside 40 ft.
Bulk loading	Pier 14 East	,, ,, 36 ft.
	Duval Sulphur Terminal	,, ,, 40 ft.
	Imperial Sugar Dock	,, ,, 36 ft.

Container terminal, wharf 1,000 ft. length, equipped with container crane handling 40 tons under the spreader or 60 tons with cargo hooks at 100 ft. outreach – depth alongside 40 ft.

Note: Water depths are based on MLW. Depths may be less due to siltation.

STEVEDORES: Order before 1700 for 0700 or 0800 hrs. following day. During day can be ordered at 2 hours notice. Gangs must be ordered before 1900 hrs. on Saturday for Sunday or holiday.
MEDICAL: All medical assistance available.
FRESH WATER: At all wharves.
FUEL: All grades available. Delivery only by barge from Houston.
GANGWAY/DECK WATCHMEN: Required only if crewmen detained by Immigration.
OPENING/CLOSING HATCHES: By stevedores only.
CUSTOMS ALLOWANCE: Each man 300 cigarettes, or 100 cigars or 1 lb. tobacco; 1 quart wine/spirits.
IDENTIFICATION CARDS: Immigration form 1-95 required.
CONSULS:
Chile
Dominican Rep.
Finland
Guatemala
Haiti
Iceland
Italy
Mexico
Netherlands
Norway
Sweden
Venezuela

TIME: Central Standard Time. Daylight Saving Time effective from April to October.
HOLIDAYS: January 1st; February 22nd; March 2nd; May 30th; June 19th; July 4th; First Monday in September; November 11th; December 25th; No work on Labour Day or Christmas Day.
POLICE/AMBULANCE/FIRE: All services provided.
SHORE LEAVE: No restrictions unless detained by Immigration.
AUTHORITY: Galveston Wharves (The Port of Galveston).

GEISMAR, Louisiana: 30.13 N. 91.01 W.

East bank of Mississippi River, about 187 miles from sea.
DOCUMENTS/PILOTAGE: For all general information, refer to "New Orleans".
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Available if required; normally not used.
BERTHING: Wyandotte Chemical Co: berth 620 ft. long, 32 ft. depth.
FRESH WATER: Available ex-wharf.
FUEL: Not available.
DENSITY: Fresh water (1000).

GOOD HOPE, Louisiana: 29.59 N. 90.24 W.

East bank of Mississippi River, about 140 miles from sea.
DOCUMENTS: For all general information, refer to "New Orleans".
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
ANCHORAGE: South of berth in river for unlimited number of ships.
TUGS: 1 tug used for mooring/unmooring.
BERTHING: General American tank storage terminal; tanker berth, 40 ft. depth alongside. 2 × 8-in. hoses. Loading 17,000 bbls.p.h. No ballast facilities.

Norco: Shell Oil Co. 2 tanker berths 45 ft. alongside. 2 × 8-in. hoses, loading 10,000 bbls.p.h. Ballast line 12-in., max. capacity 20,000 barrels.
FRESH WATER: Available ex-wharf.
FUEL: Bunker "C" available ex-wharf.
DENSITY: Fresh water, 1000.
SHIPMASTER'S REPORT: February 1979.

Restrictions: Not allowed to take bunkers, luboils or stores from barge while alongside. Large tankers often require 2 tugs pushing all the time to keep them alongside, especially when river is in flood. This at GATX No. 4.

VHF: Standby on Channel 13 during pilotage and when anchored. Agents normally place walkie-talkie aboard for their direct communication.

Berthing: Always starboard side to. Forward will have 2 backsprings to jetty, 4 headropes, 2 breasts to buoys, lashings not required, same aft. Only one boat used and secures the bow first.

Telephones: Not available at GATX No. 4 but there is one on next jetty upriver.

GRAMERCY, Louisiana: 30.03 N. 90.41 W.

East bank of Mississippi, about 144 miles from sea.
DOCUMENTS/PILOTAGE: For all general information, refer to "New Orleans."
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Available if required; normally not used.
BERTHING: Colonial Sugar Refinery: berth 600 ft. long, 40 ft. depth. Kaiser Aluminium and Chemical Corp: berth, 40 ft. depth.
FRESH WATER: Available ex-wharf.
FUEL: Not available.
DENSITY: Fresh water, 1000.

GRAYS HARBOR, Washington: 46.55 N. 124.08 W.

(See Plan Book)

DOCUMENTS, etc.: Refer to "Tacoma".
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
PILOTAGE: A vessel approaching requested to give 24 hours advance notice of arrival to Grays and Willapa Pilots through Everett Radio, KLB which runs on a calling frequency of 500 kc/s. and VHF Channels 6, 8, 12 and 16. Pilot boat, "Mercury", 65 ft. long, with an 18 ft. beam, powered by a 330 h.p. GM diesel engine. "Mercury" moored at Westport Fishing Basin, and delivers Pilots to vessels outside Grays Harbor bar.
ARRIVED VESSEL: Vessels must be inside Grays Harbor bar to be considered an "arrived vessel".
ANCHORAGE: No specific areas in Grays Harbor have been designated as anchorage grounds. The best area is Southward of Sand Island Shoal in depths of 35 to 40 ft.; the holding ground is good.
RESTRICTIONS: Bar Channel and Approach Channel, depth 30 ft. MLLW. Mean tidal range, about 10 ft.
BERTHING: 7 wharves in port dock. Depths alongside from 15-35 ft.
BULK CARGO FACILITIES: 1 berth in port dock for petroleum discharge and/or bunkering. No other bulk cargo berths. No liquid chemical or LPG berths. No roll-on/roll-off berths. One berth with container capability.
STEVEDORES: 18 local gangs. Additional gangs imported if required.
HOLIDAYS: See "Tacoma".
MEDICAL: All medical facilities available. Local hospital.
DENSITY: Salt water.
FRESH WATER: Available at all wharves.
GANGWAY/DECK WATCHMEN: Required only if detainees aboard.
CUSTOMS ALLOWANCE: No definite quantities prescribed; reasonable allowance at discretion of Customs Inspector.
AUTHORITY: Port of Grays Harbor.

AGENT: See "Seattle".

GREEN BAY, Wisconsin 44.32 N. 88.02 W.

(See Plan Book)

For important general information refer to St. Lawrence Seaway.
DOCUMENTS: No special documents required. All necessary Customs and St. Lawrence Seaway documentation should be accomplished prior arrival.
PILOTAGE: Pilot not compulsory although some Masters prefer Pilot aboard. Pilot boards prior to arrival.
CHANNEL: From Grassy Island, outside mouth of Fox River, to C&NW Railway bridge, channel is maintained 24 ft. below low-water-datum (576.8 ft. above Father Point, Quebec) and 300 ft. width except through bridges. Above C&NW Railway bridge channel and turning basin is maintained at 20 ft. below low-water-datum. From Grassy Island lakeward channel maintained at 26 ft. below low-water-datum varying in width from 300 to 500 ft. for approximately 8 miles. 24 ft. deep turning basin maintained at confluence of Fox River and East River opposite Leicht's North Dock. Currents will flow up and down river and will influence channel depths at times. Present high-water will add 2-4 ft. to channel depths.
RESTRICTIONS: Entry may be made at any time of day or night subject to Master's discretion.
MAX. SIZE: Subject water depths and width of bridge openings.
HEALTH: See "Health: all Ports" before first U.S.A. port (Albany). Illness reports made to Chicago Quarantine Station.
Pratique may be obtained prior to entry of St. Lawrence Seaway. Suspected disease should be reported locally. Rat guards required on all lines.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Ships' Agents located at Milwaukee and Chicago, ETA should be directed accordingly.
TUGS: Join vessel at any designated point. Charges should be obtained from tug operators. Use ship's lines.
BERTHING: General cargo at Leicht's North Dock, 1,500 ft. length, full channel depth. Discharge by ship's gear and shore based equipment. Bulk cargo handled at several docks.
CRANES: Shore based lifting devices to 20 tons. 100 ton stiff-legged derrick available for heavy cargo.
BULK CARGO FACILITIES: Available at several places for coal, salt, fertilizer, chemicals, liquid cargo, stone, pig-iron, etc.
BRIDGES: No bridge opening restrictions for railroad bridges. Highway bridges permit vessels of 300 tons or over to transit at any time. However, heavy land traffic occurs about 0730–0830 hrs., 1145–1315 hrs. and 1630–1730 hrs., and co-operation of Masters is urged during these times so that city bridges may remain closed.
STEVEDORES: Services performed by Leicht Transfer and Storage Co. and arrangements should be handled by ship's Agent or directly with Leicht's.
MEDICAL: Subject to regulations of U.S. Customs and Immigration and St. Lawrence Seaway authorities. 3 excellent hospitals.
TANKERS: Limited only by harbour dimensions.
DENSITY: Fresh water harbour.
FRESH WATER: Available through ship's Agent and water company.
FUEL: Fuel oil available in any quantity. Normal fire precautions.
SURVEYORS: Available through ship's Agent.
GANGWAY/DECK WATCHMEN: Available at ship's option.
OPENING/CLOSING HATCHES: By stevedores.
REPATRIATION: Available through local immigration officials.
CONSULS: No consuls. Nearest are at Milwaukee, Chicago, Minneapolis.
REPAIRS: Topside and engine repairs available. Complete repair service available at Sturgeon Bay, 45 miles North.
DRY DOCKS: No local facilities. Available at Sturgeon Bay, Wisconsin.
AIRPORT: 8 miles from port. Served by regular airlines with over 30 flights daily.
TIME: Central standard time. Central daylight saving time in effect from the last Sunday in April to the last Sunday in October.
HOLIDAYS: January 1st (New Year's Day), May 31st (Memorial Day), July 4th (Independence Day), 1st Monday in September (Labor Day), Last Thursday in November (Thanksgiving Day). December 25th (Christmas).
POLICE/AMBULANCE/FIRE: Police: Green Bay – Administrative calls 497-3800 Emergency 497-3811 Sheriff: 497-3300 Ambulance: 432-8621 Fire Dept. Rescue – 497-3222 Fire: 497-3222
TELEPHONES: On board service. Contact Wisconsin Telephone Co.
SERVICES: Tank cleaning, fumigation, waste disposal, chandler.
SHORE LEAVE: Permitted.
IDENTIFICATION CARDS: Proper identification should be carried.
DELAYS: Expect no delays for berthing or harbour movement.
AUTHORITY: Brown County Board of Harbor Commissioners, Office of the Port Director.

GULFPORT, Mississippi: 30.21 N. 89.05 W.

(See Plan Book)

DOCUMENTS: See "New Orleans".
PILOTAGE: Compulsory from outer sea buoy to docks, provided by Gulfport Pilots Association, arranged through Agent. Pilot boards at Sea buoy.

Pilot boat has red hull, white superstructure with "PILOT" in black lettering. When pilot boat is underway, contact can be made by VHF Channel 16.
RESTRICTIONS: The Gulfport Channel is 12 miles long running between Ship Island and Cat Island. Channel is 225 ft. wide and has a minimum depth throughout of 30 ft. at MLW. Harbour is dredged rectangular basin about a 0.25 mile wide and 0.5 mile long, this area being protected by piers. Depth in harbour and along wharves is 30 ft. with a 2.5 ft. tide variation. No entry restrictions as to time.
MAX. SIZE: Length of vessel is restricted to approximately 900 ft. by turning basin, no breadth restrictions.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Gulfport Radio KKM 650 – VHF Channel 16 (26 safety only). Continuous service.
TUGS: 2 tugs available but not required unless requested to assist in berthing.
CARGO HANDLING: 4 gantry banana terminal capable of unloading 16,000 boxes per hour. 50,000 sq. ft. transit shed refrigerated facility.
STEVEDORES: Must have 12 hours' notice to arrange stevedore gangs. Normal work day 0800–1200 hrs., and then 1300–1700 hrs. Monday through Friday.
MEDICAL: No advance notice required for medical attention, doctor and hospital care readily available.
FRESH WATER: Fresh water is available.
FUEL: Some fuel available, others upon advance notice.
DENSITY: Brackish.
GANGWAY/DECK WATCHMEN: Port guards or Dubuisson Detective Agency.
CONSULS: Many countries have consuls within a 100 mile radius of Gulfport.
REPAIRS: Most deck and engine repairs could be arranged within port facilities.
AIRPORT: Gulfport Municipal Airport is approximately 4 miles from the port and served by regularly scheduled airlines.
REPATRIATION: Can be arranged.
TIME: The Port of Gulfport is on Central Standard Time, GMT minus 6 hours; clocks are moved ahead 1 hour during Summer months.
HOLIDAYS: United States national holidays are observed, cargo work can be arranged on these days at a penalty time.
POLICE/FIRE/AMBULANCE: Telephone numbers for emergency services are; Fire 863-1212; Police 863-4211; Ambulance 863-1441.
TELEPHONE: Can be placed aboard only by special arrangement; not normally available.
DEVELOPMENTS: Container crane to be installed.
AUTHORITY: Mississippi State Port Authority at Gulfport.

HAINES, Alaska

(See Plan Book)

(Lutak Inlet) Located 5 miles N.W. of Haines. Open all year.
APPROACHES: Lynn Canal to Lutak Inlet.
DOCUMENTS: See "Anchorage, Alaska".
PILOTAGE: Pilot pick-up point located in vicinity of Point Retreat.
MAX. SIZE: Harbour depth 36 ft. at zerotide. Tides: diurnal range 16 ft. Also see "Berthing".
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
ANCHORAGE: Lutak Inlet.
CUSTOMS: Quarantine, immigration and Customs, local.
TUGS: 3 available.
BERTHING:

1. Haines dry cargo dock can be secured by request through City of Haines (Telephone: Area code 907 number 766-2231). Berthing length – 967 ft. and a clear surface of over 300 ft. in depth. Depth at face of dock – 36 ft. MLLW. No covered sheds. 6 acre open staging area. Crane may be available. Continuous to 300 ft. Alaska State Ferry facility which is equipped to handle roll on/roll-off cargo.
2. Schnabel Lumber Co. Dock: Berthing length – 520 ft. long and 80 ft. wide. Depth at face of dock – 45 ft. No covered storage. Open storage. 30,000-ton capacity for bulk cargo storage. No crane. Chip loader with 350 t.p.h. capacity. Crane available.

STEVEDORES: 4 gangs.
REPAIRS: None.
WATER: Available in small quantities in temperate seasons only.
FUEL: None.
MEDICAL: Doctor/dentist available.
TRANSPORTATION: Air, ferry. Haines Highway principal route connecting Southeast Alaska with the Alcan Highway leading to the interior of Alaska and Canada.

HAMPTON ROADS DISTRICT, Virginia:

(See Plan Book)

NORFOLK, 36.51 N. 76.19 W.
NEWPORT NEWS, 36.59 N. 76.26 W.
PORTSMOUTH, 36.50 N. 76.17 W.

DOCUMENTS:

3 copies Cargo Manifest (Forms 7527–A or 7527–B), the original showing all cargo on board, and 2 copies showing only cargo for this port.
2 copies Crew Manifest (curio list).
2 copies Stores List.
2 copies Passenger List (Form I–418).
2 copies Crew List.

Customs boarding officer will also examine ship's register and load line Certificate. In addition, the following documents will be required for formal entry to be made within 48 hours of arrival from abroad, or 24 hours of arrival from a United States port:

Health Pratique.
Master's Oath (Customs Form 3255).
All foreign clearances.
U.S. Certificates of payment of Tonnage Tax (Customs Form 1002).
Certified Crew List.
F.M.C. Certificate of Financial Responsibility.

PILOTAGE: Compulsory; is generally arranged through port Agent. Vessels approaching port may use VHF telephone, Channel No. 16, radio telephone 2738 kHz. Advance notice of 24 hours is required of ETA. Pilot boat is 165 ft. long, black steel hull, with "VA Pilot" painted on hull, white superstructure, and buff funnel. Long and short light or sound signals are used by vessels requiring a Pilot. Location of pilot boat is 1 mile North of Cape Henry Lighthouse. Pilot boat will issue instructions in event of bad weather or when pilot boat is off station and information on anchorage for vessel awaiting a Pilot.
ANCHORAGE: In Hampton Roads, depth 45 ft.
RESTRICTIONS: Channels to Norfolk and Newport News – 45 ft. depth. Elizabeth River Channel – 40 ft. depth to Norfolk and Western Railway Bridge, then 35 ft. to Chesapeake.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Fort Monroe Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Radio-telephone communications in the Hampton Roads area are furnished by the Chesapeake and Potomac Telephone Company of Virginia. A regular ship-to-shore channel transmits to ship on 2538 kHz and the ship returns the call on 2142 kHz. A "daytime" ship-to-shore channel transmits to ship on 2450 kHz and the ship returns the call on 2366 kHz. In the very high frequency band, "XY" ship-to-shore is available which transmits to the ship on 161.9 mHz and the ship returns the call on 157.3 mHz.
BERTHING:

Public General Cargo Facilities:

		Length (ft.)	*Depth (ft.)*	*Cranes*
Lambert Point Terminal:				
Pier L	Berth 1	600	32	Nil
	Berth 2	600	32	Nil
	Berth 3	600	32	Nil
	Berth 4	600	32	Nil
Pier N	Berth 1	550	32	Nil
	Berth 2	550	32	Nil
	Berth 3	550	32	2×15 ton gantries
	Berth 4	550	32	
Pier P	Berth 1	598	32	2×25 ton cranes serve all berths
	Berth 2	598	32	
	Berth 3	598	32	
	Berth 4	598	32	
Sewell's Point:				
Pier A	Berth 1	600	35	1×15 ton revolving crane 1×7.5 ton cantilever crane
	Berth 2	600	35	
Pier B	Berth 1	600	35	Nil
	Berth 2	600	35	Nil
Norfolk International Terminals:				
Pier 1	Berth 1	664	35	Nil
	Berth 2	664	35	Nil
	Berth 3	664	35	Nil
	Berth 4	664	35	Nil
Pier 2	Berth 1	664	35	Nil
	Berth 2	664	35	Nil
	Berth 3	664	35	1×7.5 ton gantry crane serves berth 3 and 4
	Berth 4	664	35	
Container Pier	2 berths	1,589	35	3×50 ton, 1×30 ton container gantries
Newport News Marine Terminal:				
NNMT Pier B	Berth 1	543	35	Nil
	Berth 2	620	40	1×50 ton gantry crane serves berth 2 and 3
	Berth 3	620	40	
NNMT Pier 2	Berth 1	606	32	2×30 ton gantry cranes serves berth 1 and 2
	Berth 2	606	35	
NNMT Pier 8	Berth 1	818	35	Nil
	Berth 2	818	35	Nil
NNMT Pier C	Berth 1	755	35	Same as Pier "B" plus a 40 long ton crane with outreach of 115 ft. and a 40 long ton container rubber tyred bridge crane.
	Berth 2	755	40	

Portsmouth Marine Terminal:

		Equipment
1,700	35	2×20 ton container cranes; 1×110 ton gantry crane; 3×35 ton container carriers

Sealand has private facility at Portsmouth with 2 × 50 ton Paceco cranes.

Private Cargo Facilities:

Norfolk: Elizabeth River Terminal, berth 1,000 ft. long, 35 ft. depth; Imperial Tobacco Piers, Nos. 2 and 3, 27 ft. depth; Southgate Warehouse Terminal, 3 general cargo berths, 18–25 ft. depth; N.B. & C. Line Piers, 4 general cargo berths, 20 ft. depth. Coal: Pier No. 5, 1 berth 1,000 ft. long, 36 ft. depth; Pier No. 6, 2 berths, 1,800 ft. long, 45 ft. depth. Grain: Cargill Grain elevator, 1 berth 35 ft. depth, loading rate 30,000 bushels per hour. Continental Grain Elevator, 1 berth 35 ft. depth, loading rate 45,000 bushels per hour.

Newport News: Coal: Pier No. 14, 2 berths, 1,090 ft. long, 38 ft. and 41 ft. depth; Pier No. 15, 2 berths, 1,000 ft. long and 38 ft. depth. Ore: Pier No. 9, 2 berths, 707 ft. long, 35 ft. and 42 ft. depth. Discharge rate 1,500 t.p.h.

Portsmouth: Lumber: One berth, 400 ft. long, 32 ft. depth.

TANKERS: Sewells Point: Exxon Co., 2 berths, 38 ft. depth.

Elizabeth River: *Lower Norfolk:* American Oil Company, 1 berth,
28 — 31 ft. depth; Atlantic Energy Inc., 1 berth, 32 ft. depth; Gulf Oil 2 berths, 32 ft. depth; Mobil Oil, 1 berth, 36 ft. depth; Swann Oil Co., 1
35 — berth, 32 ft. depth; Union Oil Company, 1 berth, 15–20 ft. depth; Shell Oil Company, 1 berth, 38 ft. depth; Tenneco/Cities Service, 1
27 berth, 32 ft. depth; Texaco Inc.,1 berth, 32ft. depth.

Newport News: Exxon Co., 1 berth, 35 ft.; 2 berths 19-27 ft. depth.

Portsmouth River: B.P. Oil Corp., 2 berths, 30 ft. depth.

TUGS: Compulsory, normally join the vessel in Elizabeth River.

BRIDGES: Sufficient clearance at all times.

STEVEDORES: Labour arranged through International Longshoremen's Association.

1. Straight Time – work between the hours of 0800 and 1200 and between the hours of 1300 and 1700 daily except Saturdays, Sundays and holidays.
2. Double Time – hours daily between 0600 to 0700 and 1200 to 1300, 1800 to 1900, 2400 to 0100 hrs. and all Sundays.
3. Time and one-half – shall be all those hours not included above, except holidays.

DENSITY: Average 40% fresh.

FRESH WATER: Available at all berths, Barge service available if required.

FUEL: All grades available at oil company berths. Delivery by barge to all other locations.

GANGWAY/DECK WATCHMEN: Not required unless crew members detained by Immigration.

CERTIFICATES: Cargo Gear Certificate, Derat, Radio, Safety Equipment, and Ship's Register.

CUSTOMS ALLOWANCE: At the discretion of Customs Officers. Normal allowance is 200 cigarettes or 2 lb. tobacco and 1qt. wine/spirits per man. Additional allowances may be given if considered necessary, due to length of vessel's stay in port.

IDENTIFICATION CARDS: Identification required by Immigration for shore passes.

CONSULS: The following countries are represented at Norfolk:

Belgium
Brazil
Denmark
Finland
France
Germany
Great Britain
Greece
Iceland
Italy
Mexico
Netherlands
Norway
Panama
Sweden

REPAIRS: Newport News Ship Building and Dry Dock Company in James River; 8 outfitting piers up to 1,050 ft. length. Floating cranes up to 67 tons capacity.

Norfolk Ship Building and Dry Dock Corporation, situated on East Branch of Elizabeth River. Channel depth 25 ft.; 7 piers equipped for ship's repairs. Floating crane 25 tons capacity. Other repair companies in addition.

DRY DOCKS: Norfolk: 1 dry dock 450 ft. long, 57 ft. beam; floating dock 360 ft. long, 64 ft. beam.

Newport News: Dry docks:

	Length inside gate	*Width of entrance*	*Depth of water over sill MHW*
No. 1	649 ft.	92 ft.	33 ft.
No. 2	862 ft.	118 ft.	32 ft. 3 in.
No. 3	536 ft.	78 ft.	24 ft.

Slipways: The shipyard has 3 inclining slipways with lengths up to 715 ft. and capacities up to 15,000 tons.

AIRPORT: Norfolk Airport, and Patrick Henry Airport at Newport News, over 100 flights daily.

TIME: Eastern standard time, GMT minus 5 hours. Daylight saving time, GMT minus 4 hours, from April to October.

HOLIDAYS: New Year's Day; Lee's Birthday (January 19th); Washington's Birthday (February 22nd); Good Friday; Memorial Day (May 30th); Jefferson Davis Day (June 3rd); Independence Day (July 4th); Labour Day; Election Day (1st Tuesday after 1st Monday in November); Armistice Day (November 11th); Thanksgiving Day; Christmas Day. No work can be arranged on New Year's Day, Labour Day or Christmas Day.

TELEPHONES: On-board telephones only available at shipyards.

DEVELOPMENTS: *Norfolk International Terminals:* Container Pier (Marginal Wharf) will be extended by an additional 770 ft. Project will be completed in mid-1981.

Portsmouth Marine Terminal: Container Pier (Marginal Wharf) will be extended by an additional 806 ft. Project will be completed in mid-1981.

Newport News Marine Terminal: A new gantry crane with capacity in excess of 110 tons with container capability will be erected on Berth No. 1 of "C" Pier. Project will be completed by mid-1980.

AUTHORITY: Virginia Port Authority, Norfolk.

HILO: Hawaii 19.46 N. 155.06 W.
(Including Kawaihae 20.02 N. 155.50 W.)

(See Plan Book)

DOCUMENTS:

4 Crew Lists.
4 Passenger Lists.
Customs Documents.
Clearance, Travelling Manifest.
Local Manifests.
Health Documents.
Bill of Health and Vaccination Certificates.
4 Manifests.
4 Bills of Lading.
Ship's Papers.
Certificate of Registration or Enrolment.
Annual Inspection Certificate.
Load-line Certificate.
Derat Certificate.
Drinking Water Certificate.
Radio Certificate and Licence.
4 Store Lists.

PILOTAGE: Pilots boats have VHF. Contact is made on VHF Channel 16, then switch to Channel 12. Pilot service is provided on a 24-hour basis upon suitable advance notice.

At Hilo, Pilot boards on starboard side in position 0.75 mile due East of Paukaa light. In picking up Pilot, vessels should be on Southerly course with enough speed for steerageway. Special instructions will be given by radio telephone.

At Kawaihae Pilot station in position 1 mile 287° true from No. 2 buoy. Pilot usually boards on port side with vessel on course for the entrance at dead slow speed.

ANCHORAGE: No safe anchorages either Hilo or Kawaihae for vessels awaiting Pilot. In this situation, a vessel should heave to or steam. Under good weather conditions, safe anchorage can be had in Hilo Bay. Anchorage is inside pilotage waters and requires local knowledge for safety; vessels should not anchor without Pilot.

RESTRICTIONS: At Hilo, under good weather conditions, vessels with draft up to 32 ft. 6 in. can be handled at any time.

At Kawaihae, vessels with draft up to 33 ft. handled anytime.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Honolulu Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Communicate through RCA or ITT stations in Honolulu.

TUGS: Tugs join vessels at entrance at Kawaihae and at Coconut Island at Hilo. Tugs lines are usually used at no extra charge.

BERTHING: There are many factors which affect berthing at Hawaii Island ports, the most important of which are surge and wind. Vessels should be well equipped with long mooring lines and sufficient additional line to make up 2 × 900 ft. buoy lines. In all instances, berthing instructions will be given after details concerning vessel and her cargo are received.

Pier No. 1 in Hilo handles bulk sugar vessels and container vessels, 1,220 ft. of berthing space.

Pier No. 3 in Hilo handles tankers, 575 ft. of berthing space.

Kawaihae has one overseas berth which handles both bulk sugar vessels and tankers, 605 ft. of berthing space.

CRANES: Shore cranes available, max. capacity 90 tons.

STEVEDORES: Hilo Transportation and Terminals Co. (Hilo) and Kawaihae Terminals Inc. (Kawaihae).

MEDICAL: All facilities available.

DENSITY: Variable in Hawaii area due to fresh water run-off.

FRESH WATER: Available from county of Hawaii by pipe-line.

FUEL: Can be supplied subject advance notice.

GANGWAY/DECK WATCHMEN: Required for tankers. Other ships as may be necessary due to special circumstances.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CUSTOMS ALLOWANCE: 200 cigarettes, 50 cigars per man, and one bottle U.S. quart, wine or spirit.

IDENTIFICATION CARDS: Seamen's passports only required.

REPAIRS: Limited repair service available; almost any type of machine work, welding and ordinary electrical repairs can be handled.

REPATRIATION: Direct air service to Continental United States and to Honolulu International Airport.

AIRPORT: About 1 mile from Port of Hilo and is served by regular airlines.

POLICE/AMBULANCE/FIRE: *Hilo:* Police 9353311; Ambulance and Fire 961-6022.

Kawaihae: Police 8857334; Ambulance 885-7334; Fire 961-6022.

TIME: GMT minus 10 hours all year round.
TELEPHONES: Special arrangements may be made with Hawaiian Telephone Co.
SHORE LEAVE: Allowed.
AUTHORITY: State of Hawaii, Department of Transportation, Harbours Division, Port of Hilo.

HOMER, Alaska: 59.36 N. 151.25 W.

APPROACHES: Via Cook Inlet. Port located at mouth of Kachemak Bay on Kenai Peninsula.
DOCUMENTS: See "Anchorage – Alaska".
PILOTAGE:
(1) Homer Pilots Association, Radio KTE 21, tel. 235-8526. Pilot boards 1 mile South of Homer Spit Light on Coal Point.
(2) The Southwest Alaska Pilots Association serves all ports in Cook Inlet, Prince William Sound, Resurrection Bay, Kodiak Island, the Aleutian Islands, Bristol Bay and Bering Sea. The pilot station for vessels entering Cook Inlet waters is Lat. 59° 36.2′N. Long. 151° 24.5′ W., approximately 1 mile South of Homer Spit Light on Coal Point. The pilot station cable address is "Homerpilot". The pilot station stands by on VHF Channels 10 and 16, 24 hours a day; call sign "WAB-917 Southwest Pilots". The pilot station also stands by on single side band radio as follows:
8284.4 mHz between 0800 and 1200 hrs. Alaska time, weekdays.
4136.3 mHz between 1300 and 1700 hrs. Alaska time, weekdays.
Call sign "WAB-917 Southwest Pilots".
MAX. SIZE: Harbour depth 40 ft. MLLW. Tidal range 28 ft. (−6ft. to +22 ft.) Max. draft for berthing 30 ft. at MLLW.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
ANCHORAGE: Kachemak Bay is excellent anchorage for vessels of any size. Foreign vessels may enter bay to anchor, but must have a Pilot aboard to come to dock.
RADIO: Homer Port Radio monitor C.B. Channel 17. Callsign "KCN 7188 Port of Homer".
VHF: Homer Port Radio monitor Channel 16. Callsign "WAB 935".
TUGS: 1 tug available.
BERTHING: Homer City Dock, 410 ft. long and 50 ft. wide. Limited to draft of 30 ft. 3 privately owned mobile cranes available. Capacity 15, 35 and 70 tons.
410 ft. face sloping bottom suitable for vessels with 20 ft. draft or less at chine. Inside and outside storage is available for holding and staging. Water, gasoline and diesel are available on dock.
FRESH WATER: Available from the berth.
FUEL: Available for small craft only.
REPAIRS: No facilities for repairs.
MEDICAL: Homer Hospital is a 17-bed hospital with 5 full-time doctors.
EMERGENCIES: Police department and a volunteer fire department are available plus a rescue truck.
AIRPORT: Daily air service.
AUTHORITY: City of Homer Harbour Master.

HONOLULU, Hawaii (including Barbers Point and Pearl Harbour): 21.19 N. 157.52 W. (See Plan Book)

PILOTAGE: Pilot requested by Agent. Pilot station telegraphic address on VHF (only) Channel 16, call KFQ 907. Pilot boat, 36 ft. cabin cruiser, white house, black hull. Only "G" flag necessary for vessel requiring Pilot. Pilot station, Lat. 21° 16′ 12″ N., Long. 157° 53′ 24″ W., no alternative.
DOCUMENTS:
4 Crew Lists.
4 Passenger Lists.
Customs Documents.
Clearance, Travelling Manifest.
Local Manifests.
Health Documents.
Bill of Health and Vaccination Certificates.
4 Manifests.
4 Bills of Lading.
Ship's Papers.
Certificate of Registry.
Annual Inspection Certificate.
Load-line Certificate.
Derat Certificate.
Radio Certificate and Licence.
4 Stores Lists.

Vessels scheduled to call at Pearl Harbour are required to furnish 6 copies of crew lists and passenger lists, if applicable, at least 1 working day prior to arrival, for Naval security requirement.

The United States Immigration Service requires that the Master of vessels manned by alien crew members arriving from a foreign port present the United States Immigration and Naturalisation Service's Officer with a current crew list (Form I. 418) properly visaed in their possession. An I. 94 should be prepared for each passenger prior to vessel's arrival.

U.S. Immigration Department representatives are not stationed at any Hawaiian outports. Customs officials, however, are stationed at all entry ports and accomplish both Customs examination and Immigration.

The United States Agriculture Service examines and seals ship's stores from restricted ports. Special arrangements for garbage disposal may also be required by this agency, if for example meat aboard has been purchased in a port where there is a high incidence of "hoof and mouth" disease. All garbage should be disposed of prior to arrival in port.

All regulatory bodies assess overtime charges for services of their personnel if rendered on Saturdays, Sundays, holidays or after hours on week-days.
RESTRICTIONS: Entry at any time subject to harbour control signals. 24 hours notice of arrival is obligatory.
MAX. SIZE: Controlling depth 34 ft. MLLW. Length depends on availability of berths.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Honolulu Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Call KHK, HF—8 mc/s., 12 mc/s., 16 mc/s.; LF-500. VHF Channel 16, call KFQ907, Aloha Tower Harbour Control Station.
TUGS: Tugs normally join vessel within harbour limits. Both ship's lines and tug's lines used depending on conditions.
BERTHING: Berthing given on a first-come-first-served basis according to type of vessel and particular requirements as to cargo bunkering, etc. Must be arranged through a local shipping Agent.
STEVEDORES: Gangs must be ordered 24 hours in advance. General cargo, average load per hour: 15 L/tons; average discharge per hour: 15 L/tons.
MEDICAL: Agents would like as much advance notice as possible. Complete medical facilities available. Vaccinations in accordance with U.S. Public Health requirements.
TANKERS: 4 tankers berths, max. draft 35 ft. No slop discharge facilities.

Barber's Point: Tanker berths, tugs not normally required. Mooring Master attends berthing procedure. Fresh water not available. Fuel available ex pipe-line. See "Shipmaster's Reports."

Pearl Harbour: U.S. Navy Terminal. Max. LOA 800 ft. Max. draft 38 ft. 6 in.
DENSITY: Pure salt water, no fresh water allowance.
FRESH WATER: Delivered via 2.5 in. fire hose with meter on pier. Rate of delivery between 30 and 60 t.p.h., depending on the berth.
FUEL: All U.S. grades available, no advance notice other than establishment of credit.
FIRE PRECAUTIONS: Fire wires required by tankers berthed alongside.
DEVELOPMENTS: Additional container facilities being developed at Sand Island.
GANGWAY/DECK WATCHMEN: Services of watchman recommended, usually arranged by Agent.
OPENING/CLOSING HATCHES: Normally carried out by stevedores.
CUSTOMS ALLOWANCE: 200 cigarettes, 50 cigars per man, and one bottle, U.S. quart, wine or spirits.
IDENTIFICATION CARDS: Seamen's passports needed.
CONSULS: The following countries are represented in Honolulu:
Belgium
China
Great Britain
Japan
Denmark
Finland
India
Norway
Panama
France
Germany
Korea
Netherlands
Philippines
Portugal
Sweden
Thailand
REPAIRS: All types of deck and engine repairs possible. Hull repairs below water-line in accordance with dry dock capacities.
DRY DOCKS: Commercial within Honolulu Harbour. Dry dock: 2,800 L/Ton lifting capacity, 385 ft. long, 56 ft. wide. Marine railway: 1,400 L/Ton lifting capacity, 223 ft. long, 65 ft. wide.
REPATRIATION: All facilities, crews generally leave State within 24-hour period.
AIRPORT: International airport, served by all major airlines, 5 miles from harbour.
HOLIDAYS:

New Year's Day	First or following Monday
President's Day	Third Monday in February
Kuhio Day	Third Monday in March
Good Friday	Friday before Easter
Memorial Day	May 30th or nearest Monday or Friday
Kamehameha Day	June 11th or nearest Monday or Friday
Admission Day	Third Friday in August
Labour Day	First Monday in September
Discoverer's Day	Second Monday in October
General Election Day	First Tuesday after First Monday in November (election year)
Veteran's Day	November 11th
Thanksgiving Day	Last Thursday in November
Christmas Day	December 25th

POLICE/FIRE AMBULANCE: Police, Ambulance, Fire dial 911.
TIME: G.M.T. minus 10 hours all year round.
TELEPHONES: Telephones can be placed on board at any dock.
SERVICES: All services found in major U.S. ports are available.
SHORE LEAVE: No restrictions if papers are in order.

SHIPMASTER'S REPORT No. 1: August 1978 **(See Plan Book)**
Hiri Seaberth, Barber's Point: Position 21° 16′ 22″ N. 158° 05′ 27″ W.
Operators: Pacific Resources Inc., Honolulu.
Documents:
3 Crew lists
3 Store Declarations
3 Cargo Declarations
3 General Declarations
3 Crew's Effects Declarations
3 Master's Oath of Entry

Pilotage: In case vessel has received order to berth on arrival, H.I.R.I. Mooring Master boards vessel in a position 3 miles due South of Barber's Point Lighthouse. In case vessel will not be berthed on arrival vessel is to proceed towards Honolulu. This will be advised by Agent in due time. When approaching Honolulu, vessel must remain South of a line Barber's Point Light/Diamond Head Light and await Pilot from Hawaii Port Pilots Association. Pilot will then bring vessel to outside anchorage.

Restrictions: Vessels will be berthed during daytime only and at slack water only. Unberthing day and night and at any stage of tide. Vessels up to 100,000 d.w.t. and 830 ft. LOA have been handled at H.I.R.I. Seaberth.

Radio Pratique: Not required.

Advance Notice: Refer to Charterer's/Owner's instructions. ETA cables to be sent via San Francisco Radio KFS or KPH since Honolulu Radio Station has closed down.

Communication: H.I.R.I. controller is listening VHF Channel 16, working Channel is 9. Call sign is "KTD 466".

Aloha Tower, call sign "KFQ 907" is listening Channel 16, working Channel is 12.

Tugs: Tugs of various sizes up to 2,250 h.p. and work boats available from Honolulu. While vessel in berth a workboat is continuously standing by.

Hiri Seaberth/Mooring: Seaberth consists of 8 mooring buoys equipped with quick releasing hooks. Mean depth in the berth is about 40 m. The mooring is approached from the West. A tug from Honolulu is made fast with ship's line through centre lead. Two mooring boats are on hand, a second, smaller tug is used for pushing on the port quarter. Anchors are not used for mooring. The first line to be made fast is line No. 5, thereafter lines No. 2, 6, 1, 4, 3, 7, 8 in that order. Lines 1 and 2, 5 and 6 will be doubled, finally vessel is moored with 12 lines.

Nylon lines are preferred, but wires may be used. Lines and wires must be long enough to reach buoys 600 ft. from vessel.

It is important that all nylon lines go through roller fairleads in order to avoid chafing and eventually breaking. Refer to mooring layout.

Hose Connection: A 30 in. crude line combined with a 16 in. line for black oil is used for receiving crude or loading black products. A 20 in. line is used for loading clean products.

The crude/black oil system is connected by a 12 in. hose with ASA 150 flange. Clean products system is connected by a 10 in. hose.

Vessel's port derrick to be rigged before arrival with *single* whip able to reach hose 120 ft. down on sea bottom. A travelling block is not acceptable as diver connects hook directly to hose on sea bottom. Lift required is 8 tons. Hoses are connected/disconnected by ship's personnel. Shore personnel can be arranged, charges being billed to vessel. Normal discharge rate for crude oil is about 30,000 b.p.h. with maximum 125 lbs. pressure at rail.

Repairs: Minor repairs are possible through workshops in Honolulu.

Supplies/Services: Provisions, stores, laundry available. Stores, etc. cannot be loaded on the ship while in the berth, vessels usually receive same off Honolulu.

Fuel and Marine Diesel oil available and can be loaded in mooring berth after discharge operations are completed.

In this vessel's case, however, vessel was berthed in Honolulu at Piers 30/31 for the purpose of bunkering and storing. Fresh water is available alongside piers. Crew changes are possible, shore leave is possible. The launch from Barber's Point to Honolulu Pier 10 takes about 2.5 hours.

Weather/Wind: The Hawaiian Islands are dominated in all seasons by the N.E. Trade Winds, which are present about 75% of the time. The average velocity is 12.5 m.p.h. They rarely exceed 20 m.p.h., however, gusts of 100 m.p.h. are possible. October to April is the "Kona" season which refers to occasional storms from the South. During these storms heavy rainfall and cloudiness can be expected. The average temperature is between 24 - 28° Celsius.

Tides/Current: The predicted times and heights of high and low water are published for Honolulu. The rise of tide is only 1 - 2 ft. Strong winds may effect the tides. Velocity of current is 1 - 2 knots, mostly setting in Westerly direction, however, counter-currents have been observed.

References: B.A. Charts No. 1308, 1378. List of Lights Vol. G; Coast Pilot No. 62 Vol. 3.

SHIPMASTER'S REPORT No. 2: August 1977 **(See Plan Book)**

Barber's Point Sea Berths: There are 2 buoyed berths situated near the above, of which the larger is that owned by Hawaiian Independent Refinery Inc. (H.I.R.I.), 1.9 miles × 148° from the Barber's Point Lighthouse. The other, some 2 miles N.E. of H.I.R.I. moorings, is owned by Standard Oil of California (S.O.C.A.L.) and is used for the importation of crude fuel stock to their own refinery. H.I.R.I. Berth, however, is used for both crude imports (via 1×12 in. submarine manifold) and export/bunkering of products (via 1×10 in. submarine manifold).

The H.I.R.I. Berth is based on a spread of mooring buoys to the hooks of which a ship's rope(s) are attached. It should be noted that these are NOT quick release hooks so that the weather conditions during operations are of paramount concern to all. Failure to leave the berth in sufficient time will preclude any help in unmooring by the tug boat in attendance, for letting go lines and will result in broken lines and/or buoy moorings. The 4 mooring tugs leave as soon as vessel is made fast.

The operation of mooring is governed by the wind and tidal stream. Most of the time the former is the N.E. Trade, while the tide *has* to be setting to the West for the vessel enters the berth on a course of 095° with Diamond Head Light House ahead. The fact that there are some 17 to 18 fathoms in this berth, does not rule out the action of counter currents upon a deep draft vessel such as to make a mooring operation more difficult, if not impossible. Again, a Southerly wind will force the vessel down onto the lee buoys, and over the manifold hence a *minimum* working length of 100 fathoms per rope is necessary. The action of the Southerly wind is also to build up a considerable swell, making it necessary to begin ballast as soon as practical and *no later* than when *65%* of the cargo has been discharged and so arranged to allow sufficient empty and dry tanks to maintain the vessel's safe mooring at 25 ft. draft.

The berth was laid out for vessels up to some 65,000 tons, hence the position of the single 12 in. crude oil manifold is difficult for larger vessels, while the 10 in. bunker/product hose is even further aft from the cargo discharge point. With an overall length of 885 ft., and the manifold 425 ft. from the bow, it will be seen from the plan that the stern of the vessel will make Nos. 5 and 6 buoys into breast lines, so that stern lines as such, have to be run from the after deck and any additional ropes to Nos. 4 and 7 buoys will be breast lines.

These facts limited the vessel to 100,000 metric tonnes of cargo, as the Marine Adviser to the Receivers, Pacific Resources Ltd., (operators of H.I.R.I.) was convinced that a 140,000 tonne vessel at her draft of some 54 ft., would be too difficult to manage, whereas at 44 ft. the rudder would be of maximum value, the propeller fully immersed, but the slab-sided stern at its minimum resistance value. This was justified in that the scheduled berthing was delayed for 3 hours, due to a leaking fuel valve, resulting in a minimal West-going tidal stream, and a fresh Southerly wind with swell. Full use had to be made of all tugs, and double moorings run to windward buoys, before vessel could be placed in the correct position. It is not envisaged by Receivers that similar sized vessels will be regularly accepted in future.

The instructions call for an initial discharge rate of some 12,000 b.p.h., until pumphouse radios (VHF Channel 9) advise that the system is full, after which the rate can be increased to 125 lbs. per square inch on *their* gauge at ship's manifold, about 28,000 b.p.h. maximum. Connecting of hose is achieved by ship's staff, but the hose is surveyed by diver before vessel enters berth, a small buoy being attached as an aid for the Pilot. The vessels runner and hook are lowered *to the bottom* where the diver attaches same to the hose sling, the operators having found that this method ensures a longer life for their hoses, and connections on the hard bottom of coral, overlaid with sand. The same procedure in reverse is carried out after discharge, using a tug to clear hose.

Entering Inwards: Hawaii being a full State, the entering documentation and procedures are as for any mainland USA port. It is important to note however, that under normal circumstances the vessel proceeds to a point 3 miles South of Barber's Point Lighthouse, where the Mooring Master and his Assistants join and tugs attend. The official boarding party will not, therefore, board until *AFTER* vessel is securely moored. This does not apply to a Coastguard Officer who comes with Mooring Master (or Pilot, off Honolulu) and who *MUST* be satisfied that his requirements have been met, before vessel is allowed to anchor, berth, enter port etc. (see Coastguard Regulations).

In the event that the vessel is unable to berth for a few hours due to the tidal stream, wind, etc., an anchorage can be obtained to the Eastward of the H.I.R.I. Berth and Southwest of S.O.C.A.L. Berth. If, however, there is to be a delay of some 24/48 hours, the vessel has to be anchored in the appropriate *recognised explosives anchorage* off Pearl Harbour. This will require the services of a Honolulu Pilot and possession of US Charts (B.A. Charts are small scale and do not show the anchorage areas with sufficient detail). This berth is but 7 cables from the surf line, though the new airport runway embankment acts as a perfect Radar distance guide at all times. It is preferred for inward clearance, being but 3.5 miles from the Customs Pier, whereas H.I.R.I. Berth is 13.5 miles along the coast and takes 1 hour in a normal launch. In view of the problem of Southerly winds (a 16,000 ton T.2 tanker grounded recently, while trying to enter Honolulu Harbour), it is important that any vessel at anchor is kept ready to weigh anchor and sail to seaward, to avoid any danger of dragging ashore.

Note: Vessels must *not* cross the limits of Honolulu Harbour while awaiting the Pilot and are further delayed when the Coastguard boards to inspect vessel's emergency steering and power systems, log book entries and other items as required.

Communications: Honolulu has an excellent network of public and private radio communication stations. The US Coastguard (Channel 16, 14 and 12) have an excellent range, while the various Agent offices have their own units for direct contact, in normal hours. On Channel 27 there is the Marine Operator which is a local private organisation that can connect a vessel via satellite telephone to any part of the world, as well as to Agents out of hours. However, they will require the Agent's "BAKER NUMBER" i.e. the coded number that will settle accounts locally, hence it is best to obtain this first from Agent.

N.B. The misuse of Channel 16 will bring Coastguard Authority down on any vessel breaking the code of conduct.

Bunkers and Fresh Water: No fresh water is available at Barber's Point nor are there any barges for either water or bunkers at Honolulu. A tug boat can be chartered at $5,000 per day to bring 50 tons of diesel/gas oil to the Honolulu anchorage, but it is not allowed to deliver while vessel is in H.I.R.I. moorings. The question of using the H.I.R.I. 10 in. product line for bunkers is dependant on the position of the vessel's connection and the type of product already in the line when the request is made, as any different grade is cleared and requires re-refining.

The alternative to the above is to request permission to bunker at one of the several deep water berths inside Honolulu Harbour, but apart from high cost, the attitude of the Harbour Master is negative to any entry by large tankers, inerted or not, hence delays can be anticipated even in an emergency.

Stores: A full range of provisions and dry stock is available and most deck or engineer's stores can be obtained from either the ship chandler or Dillingham Dockyard (which owns the tugs and is part of Oahu Railway & Land Co., Dillingham Corporation were Agents for the vessel).

When launches have to be used stevedores are employed to load the wire baskets at the pier and at least 2 to hook same to vessel's runner.

Repairs and Reconditioning: There would appear to be very little that cannot be handled or promoted in the mechanical, electrical and electronic fields and agencies exist for most major manufacturers, both U.S. and foreign.

Consuls: There is no longer a British Consul in Honolulu.

Launch service: This can be arranged through the Agents, the usual vessel being licensed for 28 persons only, while a substitute tug was allowed only 12 persons per trip. The cost is $130 per round trip, straight time to the Honolulu Anchorage (+$9.50 Port Fee) and $263 per 2.5 hour round trip straight time to H.I.R.I. Berth at Barber's Point. If there are vessels at both S.O.C.A.L. & H.I.R.I. Berths, the schedule and costs are supposed to be shared and thus the number who can be ashore at any one time is even more limited. All costs are increased on overtime. While on mooring run, time in excess of 2.5 hours is charged out at $120 per hour in increments of 0.5 hour.

Medical Service: In common with most US ports no doctor will attend aboard unless under special circumstances, hence the medical list has to be divided to ensure sufficient fit men are at all times aboard the vessel in case of weather problems, which would cause the launch service to be suspended, or prevent men re-boarding the ship in swell.

Coastguard Regulations: Since the 17 tanker disasters of 1976 in US waters, the Coastguard have been empowered to conduct an off-limits inspection of all laden tankers requiring to enter a US anchorage or port area. This initial survey is to ensure that all the vessels' emergency gear has been tested within 12 hours of arrival and a log entry made of same. This includes steering, lighting, inert gas plant and any safety gear of electrical nature while radar, gyro compass and any such navigational gear must be working and in use together with up to date large scale charts and both International and US Inland Rules 1977 Edition.

He will also require to see the ships manoeuvring data, squat and trim table and all information regarding draft together with engine movements in answer to telegraph plus internal communication systems. (A proposal is before Congress that all vessels be fitted with US made LORAN C equipment). Until he is satisfied the Pilot is not allowed to take the vessel inside official Port Limits.

After agreeing to allow vessel to enter, the Coastguard Officer remains on bridge to monitor all movements, responses etc., and will thereafter conduct the anti-pollution survey as laid down in Federal Register Vol. 37 Number 246 Part II of December 21st, 1972. If, however, he is of the opinion that the standard of navigation in response to the Pilot's instructions are such as to constitute a potential hazard to navigation and therefore, to become a pollution risk, he has the authority to prevent the vessel from proceeding inwards and can cause the Pilot to take the vessel to sea or to an anchorage until the defects or bridge organisation plan or engine room responses are satisfactory to again proceed.

(*N.B.* The IYCS Bridge Procedures Guide is an invaluable help with the above in conjunction with the Trials Data).

AUTHORITY: State of Hawaii, Department of Transportation, Water Transportation Facilities Division.

HOUSTON, Texas: 29.45 N. 95.20 W. (See Plan Book)

DOCUMENTS:

1 Visaed Crew List.
3 Passenger Lists.
3 or more copies of complete Manifests of Cargo for discharge at all U.S. ports.
2 or more copies of Manifest of Cargo for each individual U.S. port.
1 Souvenir List.
1 Stores List.
Ship's Register.
Tonnage Tax.
Load-line Certificate.
Nationality Certificate.
No health document required.

PILOTAGE: Compulsory. Radio to local Agent who arranges Pilot and specifies boarding time. U.S. Coast Guard requires 24 hours notice in advance of arrival Galveston Bar. Pilot boats and station on VHF Channel 12, Bridge to Bridge is Channel 13 and tugs for docking and off-docking on Channel 14. 3 Pilot boats marked HP No. 1 – 53 ft., HP No. 2 – 61 ft. and HP No. 3 – 106 ft. in length. Pilot boats contacted by light in International Morse code; no sound signal. Pilot taken on board at Sea Buoy No. 1, located 6.7 miles from Galveston. Seldom, if ever, is water too rough for boarding at above location. Anchorage located in Bolivar Roads, 6.7 miles inward from Sea Buoy No. 1.

ANCHORAGES: Anchorage for Houston is only in Bolivar Roads in Galveston, Texas, which has ample space and depth for all Houston bound vessels.

RESTRICTIONS: None with respect to time of day or night, or with state of tide.

Houston Ship Channel Dimensions:

Section of Channel	*Miles*	*Width (ft.)*	*Depth (ft.)*
Bolivar Roads to Morgan Point	25.6	400	40
Morgan Point to Exxon Co. Slip	4.8	400	40
Exxon Co. Slip to Shell Oil Co. Slip	8.8	400	40
Shell Oil Slip to Hunting Bayou	4.6	300	40
Turning Point at Hunting Bayou	0.2	600	40
Hunting Bayou to Clinton Island Turning Basin	2.8	300	40
Clinton Island Turning Basin	0.2	1,000	40
Clinton Island Turning Basin to Wharf No. 15	3.6	300	36
Turning Basin	0.8	250 to 970	36
Total miles	51.4		

MAX. SIZE: Max. 850 ft. long, 115 ft. breadth and 39 ft. draft. Tide minimal, effected primarily by wind only. Should a vessel's draft exceed 39 ft., permission to enter must be obtained from the U.S. Coast Guard.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: International Telephone and Telegraph – ITT – Galveston call letters KLC.

TUGS: Tugs come alongside just off dock or immediately prior to entering turning basin if vessel is to turn, or at Pilot's discretion.

BERTHING: No special requirements other than authority from terminal operator local Agent.

Public Wharves – Port of Houston Authority Facilities:

Wharves	*Berth Length Feet*	*Berthing Capacity No. of Ships*
No. 1	600	1
No. 2	525	1
No. 3	802	2
No. 4	779	2
No. 8	624	1
No. 9	581	1
No. 10	600	1
No. 11	530	1
No. 12 (2-storey)	530	1
No. 13 (2-storey)	460	1
No. 14	480	1
No. 15	480	1
No. 16	603	1
No. 17	600	1
No. 18	600	1
No. 19	577	1
No. 20	593	1
No. 21	600	1
No. 22	600	1
No. 23	600	1
No. 24	600	1
No. 25	600	1
No. 26	600	1
No. 27	600	1
No. 28	600	1
No. 29	600	1
No. 30	600	1
No. 31	576	1
Nos. 41-48	3,428	8
Manchester No. 1	296	1
Manchester No. 2	500	1
Manchester No. 3	500	1
Bulk Plant No. 1	650	1
Bulk Plant No. 2 (Lay Berth)	600	1
Barbours Cut LASH Ship Berth	900	1
Barbours Cut Container Berth No. 1	1,000	2
No. 2	1,000	2
Barbours Cut Ro/Ro Platform		2

Petty Terminal Corporation (PETCO) Dock:

Deepwater shipside terminal located on South side of channel. One ship berth 720 ft. long with water depth of 40 ft. One covered warehouse 100,000 sq. ft. with rail track inside warehouse and on outside concrete apron. Complete services available for discharging and shipping general cargo. Owned by Intercontinental Terminals Company and operated by Petty Terminal Corporation.

Manchester Terminal Company:

3 ship berths – 1,650 ft. in length (including 1 piling cluster).

Served by 1 marginal track and 2 outside tracks behind docks plus loading tracks to all other facilities. Special loading-unloading docks for motor trucks available.

Equipment: 62 Lift Machines; 7 Tractors; 1 Towmotor, 30,000 lbs. capacity; 4 Sweepers, 3 Scrubbing Machines.

Manchester Terminal Company also has 18,000 cargo pallets.

New Terminal Warehouse Corporation:

Capacity 3 ship berths. Wharf 1,400 ft. long. Open storage areas of 50,000 sq. ft. Covered storage areas of 200,000 sq. ft.

Other Wharf Facilities:

In addition to the for-hire terminals. Port of Houston has some 43 ship berths plus various barge facilities on the Ship Channel maintained and used exclusively by industries. Most of these facilities are tanker ship berths at the refineries. There are also 4 liquid-bulk terminals for hire: Amerada Hess Terminal and General American Tank Storage Terminals, the latter having 2 separate locations; South Coast Terminals; Robertson Terminals, Inc.

Barbours Cut: A new facility owned by the Port Authority has been opened at Barbours Cut, 25 miles across Galveston Bay from Bolivar Roads, where the ship channel moves inland at Morgans Point. This is a 500 ft. pier with mooring dolphins for handling the new, large barge-carrying vessels (LASH).

BULK HANDLING FACILITIES:

Public Grain Elevators: Back of Wharves 14 and 15. Capacity 6,000,000 bushels.

Equipped to unload from 110 to 120 cars in 10 hours, or deliver a combined total of 80,000 bushels per hour to 2 ships. 12 mechanical grain trimmers are in use at the Elevator as well as other major equipment including 2 car dumpers and 7 hopper scales of 150,000 lbs capacity. 2 modern grain truck dumpers can unload up to 30 trucks per hour.

Public Bulk Materials Handling Plant: At Greens Bayou.

Loading/unloading capacity is 1,000 long. t.p.h. free digging rate. Fully automatic plant handles dry bulk commodities rapidly to and from ships and barges through the loading and unloading towers, conveyor systems, hoppers, pits, surge bins and scales; with rail and truck facilities and ample ground storage. Rail cars are rapidly moved with large rubber-tyre tractors. These tractors are equipped with two-way radios for instant communication with unloaders. Boom of unloading tower reaches 76 ft. from face of dock, bucket capacity is 10 tons; loading tower boom reaches out 61 ft. from dock face and is equipped with automatic trimmer. Both towers can travel the full length of the dock. Mooring facilities for a waiting vessel have been installed next to existing dock. Also available: a boxcar unloading system (Augermobile), 2 heavy-duty front-end loaders and 4 heavy-duty car shakers.

Elco Shipside Elevator Company:

Two million bushel capacity elevator which loads up to 25,000 bushels per hour to vessels berthing at Dock 2 of the Port Authority's Manchester Wharves.

Goodpasture, Inc. and Continental Grain Company:

Grain elevator with 12 million bushel capacity – 4 ship berths. Also general cargo handling. Max. draft 38 ft. Loading rate 1,000 t.p.h.

Union Equity Co-Operative Exchange:

Grain elevator with 6 million bushel capacity, 1 grain berth, 1 lay berth, each 980 ft. long, water depth of 40 ft. for all berths. Loading rate 1,200 t.p.h.

Adams Terminal: Phillips Terminal Company.

2,700 linear ft. capacity 5 vessels. Bulk cargo loading conveyor system rated at 400 t.p.h.; horizontal boom, hammerhead-type clamshell unloader equipped with five-yard ore bucket, rated at 150 to 250 t.p.h.; 2 gantry cranes, capacity 40 tons at 30 ft. radius; Robbins heavy-duty car shakeout; 20-ton truck mounted crane. One D & H gantry crane modified to handle five-yard bucket for bulk ore discharge. 100 t.p.h. Specialists in import and export bulk cargo. Covered storage – 73,000 sq. ft.

Jacintoport Terminal:

Deepwater shipside terminal located on the North side of the Ship channel some 15 miles downstream from the Turning Basin.

Three ship berths with water depth alongside the wharf at 32 ft. 24,000 sq. ft. of transit sheds; 60,000 sq. ft. of back covered storage warehouse space, and 300 acres available for open storage. Rail service by the PTRA and Missouri Pacific. 200 igloos provide storage with less than 4° change in temperature year around. 500 cargo pallets. Slip is 4,200 ft. long and 400 ft. wide. 3,600 ft. marginal trackage. Owned and operated by Bethlehem Steel Corporation.

Cargill, Inc.

Grain elevator with a capacity of 3.5 million bushels. Two ship berths. Max. draft 38 ft. Loading rate 1,500 t.p.h.

CRANES: (Capacities 1 ton=2,000 lbs.)

Locomotive Cranes: Crane No. 15 – American, Diesel Electric: Capacity at 45 ft. radius – 17 tons.

Other Cranes:

Mobile No. 1 Crane – Diesel: Capacity 7.5 tons
Mobile No. 2 Crane – Diesel: Capacity 20 tons
Mobile No. 3 Crane – Diesel: Capacity 20 tons
Mobile No. 4 Crane – Diesel: Capacity 50 tons
Mobile No. 5 Crane – Diesel: Capacity 50 tons
Mobile No. 6 Crane – Diesel: Capacity 80 tons
Mobile No. 7 Crane – Diesel: Capacity 80 tons
Mobile No. 8 Crane – Diesel: Capacity 150 tons
Mobile No. 9 Crane – Diesel: Capacity 80 tons
Mobile No. 10 Crane – Diesel: Capacity 80 tons
Gantry, American Revolver R-25 Electric: Capacity at 65 ft. radius – 50 tons
Gantry, Clyde Whirley, Diesel Electric: Capacity at 45 ft. radius – 30 tons
Gantry, Portainer, Electric: Capacity at 81 ft. reach – 27.5 tons
Gantry, Portainer, Diesel Electric: Capacity at 113 ft. reach – 44 tons
Gantry, Portainer, Electric: Capacity at 140 ft. reach – 30 tons
Stiff Leg Derrick, Electric: Capacity at 50 ft. reach – 75 tons

BRIDGES: One bridge crosses channel immediately East of Public Wharf 31, clearance of 135 ft.

STEVEDORES: Stevedore, on advice from representative of local Agent, must order labour prior to 1700 for 0700 or 0800 hrs. start the following day. Can order at 0800 for 1000, 1100 for 1300 and 1700 for 1900 hrs. start. Gangs must be ordered prior to 1700 hrs. on Saturday for Sunday or holiday.

MEDICAL: Give sufficient notice to order doctor or ambulance. Numerous hospitals available. Seaman's health certificate required.

TANKERS: No specific requirements for oil carriers with respect to load/discharge lines. Tankers must be gas free to enter turning basin area. Approximately 12 tanker berths, excluding Humble Oil & Refining Co. in Baytown, Texas.

DENSITY: Classed as full fresh but varies with rainfall and tide, usually 4 to 5 in. allowance on full draft.

FRESH WATER: Available at all terminals through pipe and hose.

FUEL: All grades and viscosities available.

FIRE PRECAUTIONS: All standard precautions per code of Federal Regulations plus local ordinances. Tankers, unless gas free, not permitted at wharves in the immediate turning basin area.

GANGWAY/DECK WATCHMEN: Not required, but are available and can be arranged by local Agent at Master's request.

OPENING/CLOSING HATCHES: By stevedores only – vessel will be charged for this work if done by crew.

CUSTOMS ALLOWANCE: Tobacco, 300 cigarettes, 100 cigars, 1 lb. of tobacco or combination for each man. Wine and/or Spirit, 1 quart bottle for each crew member.

CARGO GEAR: Cargo gear safety certificate required.

IDENTIFICATION CARDS: Immigration Form I-95 card required.

CONSULS:

Argentina
Belgium
Bolivia
Brazil
Chile
China
Colombia
Costa Rica
Denmark
Dominican Republic
Ecuador
El Salvador
Finland
France
Germany
Great Britain
Guatemala
Haiti
Honduras
Israel
Iceland
Italy
Japan
Jordan
Korea
Netherlands
Luxembourg
Mexico
Netherlands
Nicaragua
Norway
Panama
Paraguay
Peru
Portugal
South Africa
Spain
Sweden
Uruguay
Venezuela

REPAIRS: All types available.

DRY DOCKS: Todd Shipyard, 12,000 ton drydock at Greens Bayou.

REPATRIATION: Danner Guard Service can handle all phases.

AIRPORT: Approximately 0.5 hour by car; served by regular airlines.

TIME: Central Standard with daylight saving time effective from April to October.

HOLIDAYS: January 1st; February 22nd; March 2nd; May 30th; June 19th; July 4th; First Monday in September; November 11th; December 25th. No work performed on first Monday in September and December 25th except in emergency.

POLICE/FIRE/AMBULANCE: All services provided or available.

TELEPHONES: Currently no arrangements for placing telephones aboard but easily accessible on wharves.

SERVICES: All services available.

SHORE LEAVE: Shore leave granted except when individual not qualified.

DEVELOPMENTS: Channel depths to be maintained at 40 ft. Bayport development East and South of Morgans Point to have deep draft berths for liquid bulk and general cargo.

SHIPMASTER'S REPORT: 1975.

Customs:

Bond remained sealed.
2 Copies of Curio Lists.
2 Copies Store Lists.
1 Crew List.

Immigration:

No visit. 1 Crew List.

Agents:

Given Travelling copies of Clearance last port, Tax Tonnage receipt last port plus cargo manifests.

Agricultral Dept. Re-sealed Meat and vegetable rooms. Inspected Galley Messrooms, etc. Garbage cans to be covered.

Provisions and Stores. Satisfactory. Select own ship chandler.

Laundry. Facilities available but not used.

Coast Guard. No visit.

National Cargo Bureau: Same as New Orleans.

Watchmen: None placed on board. Security at gate fairly strict.

Telephone: None placed on board. Use dock office.

Fresh Water: Available.

Fuel: Available by barge if required. Do not over stem.

Engineering and Repairs: Efficient and satisfactory. Price high compared to N.Z.

Radio Messages: Send ETA after departure New Orleans to Agents and Houston Pilots with draft. Notify Agents of any explosives.

Stevedores: Hours of work. 0800 to 1200 hrs., 1300 to 1800 hrs., 1900 to 2300 hrs. Weekday gangs will work through meal hours to finish. At weekend, day labour works right through to midnight if necessary on time and a half then double time for meal hours.

Crew must not clean hatches. Labour has claim on cleaning and has to be paid in addition to crew. Crew open and close hatches, but not until hatch foreman present. Not before labour working hours.

Working heavy lifts with ship's gear loading rate very slow, especially at end of shift. Due to nature of deck cargo; 11 ton lifts 52 ft. long.

Constant supervision needed for deck cargo.

Head stevedore checks Factory Act Book before starting.

No plan makers. Details sent back to New Orleans for redistribution to discharge ports.

General: Pilot boards from large grey metal cutter off fairway buoy. Flash every 2.5 seconds. Give good lee and have ladder 8/10 ft. above water with usual manropes, heaving line, etc.

If you have to anchor most vessels use the Eastern anchorage about 1.5 miles East of fairway buoy and clear of fairway marked channel. Soft mud bottom. Use plenty of cable.

Berth; Ships spaced very close to each other. Rise and fall of tide about 1 ft.

Moorings: at least 4 head lines and stern lines plus 2 springs each end. Ships frequently passing and channel narrow consequently a good deal of surge. Lines to be frequently looked at and kept tight. Parted 3 springs in as many days!!! Gangway also to be watched. General rule is to use ship's gangway. Wide apron in front of sheds with rail lines but fork-lifts used most.

Agents have office on wharf with direct line to city office and outside lines.

Wooden piling which acts as fenders. Bollards of the large cleat type. Sufficient but not plentiful. Two linesmen each end when arriving and departing. No permanent cranes but mobile ones can be hired. Quay about 25 ft. above water.

Recommended not to walk about or up to bus especially at night. Better for 2 or more to get a taxi. Fairly good 3–4 dollars to Houston.

Seamans Mission near by. Very good, new and modern.

Tugs: Used for berthing and unberthing. Had 2 on arrival due to strong wind and close proximity of mast top to bridge.

Sailing had 1 tug lashed up alongside forward shoulder.

Tugs use own lines.

Bridge: There is a bridge above Upper Clinton Bend from Manchester on the South to Clinton Park on the North. This is a relatively new bridge to be passed under with a clearance of only 135 ft. Check the rise of tide on way up.

AUTHORITY: Port of Houston Authority.

HUENEME, California: 34.09 N. 119.12 W.

(See Plan Book)

DOCUMENTS: See "San Francisco".

PILOTAGE: It is requested that ships entering port stand by 1 mile off harbour entrance and await port Pilot who will board from a tug. The U.S. Coast Guard Station at the harbour entrance maintains a radio beacon.

All vessels 300 gross registered tons and over entering, leaving and shifting within the Port of Hueneme, including area of the Oxnard Harbour District, must be piloted by a port Pilot duly licensed to perform the services of piloting vessels within the Port of Hueneme. The Oxnard Harbour District does not maintain Pilots; licensed Pilots are available on a 24-hour-a-day basis from the Commanding Officer, Naval Construction Battalion Center. As a service to all vessels, requests for Pilots may be made by Agent or ship to General Manager of Oxnard Harbour District, who will act for ship in obtaining necessary Pilots. They can also be obtained by an electronic message request addressed to "CO, CBCEN, PORHUE" or by direct request to the Port Services Officer, U.S. Naval Construction Battalion Center. It is not necessary to change Pilots at this port.

ANCHORAGE: If there is a wait for Pilot caused by weather, visibility, congestion in harbour, or any other reason, the best anchorage area is W.S.W. of the harbour entrance where there are no hazards and there is some protection afforded by the natural curve of the coastline.

RESTRICTIONS: The length of entrance channel is 2,300 ft. The narrowest width of harbour entrance channel is 330 ft. However, because of prevailing fresh winds, this is a one-way channel; thus, deep-draft ships not able to manoeuvre easily in a restricted channel have precedence over smaller craft.

RADIO: The U.S. Coast Guard Station, Channel Islands Marine, located at the entrance to harbour, guards the following frequencies: 2182 kc/s., 156.8 mc/s., and VHF Channels 12, 16, 21, 22, 23 and 83. After initial call up the Coast Guard can shift to 2670 kc/s., 2694 kc/s., 5080 kc/s. The Naval Construction Battalion Center (Port Hueneme Control) guards Channel 16. The harbour tugs guard Channel 16 continuously. The harbour Pilots, when expecting a commercial merchant vessel guard Channel 16 voice circuit and voice call "Port Hueneme Pilot".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Los Angeles Quarantine Station.

Ships required to pass quarantine may enter port and moor. "Q" Flag is to be flown. Upon mooring, ship must post gangway watch until ship has passed quarantine. When Port of Hueneme is its port of first arrival in the United States from foreign ports or from States other than California, a ship must be inspected by the Department of Agriculture. There is a local representative in Oxnard. The Oxnard Harbour District will order officials if requested by ship or Agent.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: Tug services for port of Hueneme are furnished by the Commanding Officer, Naval Construction Battalion Center, Port Hueneme, California. Requests for tug services may be made to the General Manager of the Oxnard Harbour District, who will act as Agent for ship in forwarding them. 2 tugs are available on a 24 hour basis. They are Class YTB, with 2,000 shaft horsepower. The number of tugs to be used on any movement is determined by port Pilot in charge of the movement. Tugs are not available for deep-sea towing, except in case of emergency to save life or property. As a service to all vessels, the Oxnard Harbour District, acting as Agent for vessel, will pay all necessary tug fees to United States Government, subject to reimbursement conditions as arranged between the vessel, her owners, or Agents, and the General Manager, Oxnard Harbour District. Seldom are tug charges more than the minimum due to the short transit time to berths.

BERTHING: Berthing arrangements should be made with the General Manager by Agent as far in advance of arrival date as possible, specifying dates of arrival and sailing, and nature and quantity of cargo to be handled. The Oxnard Harbour District also has a licence agreement with the U.S. Naval Construction Battalion Center, Port Hueneme, for the use of additional berths and terminal facilities on an "as available" basis. Prior arrangements must be made, should use of these additional facilities be desired or necessary. The Port of Hueneme has three 600 ft. berths with depth 35 ft. MLW and appropriate terminal facilities. At the present time there are 10 deep-draft berths within the entire port area.

Bottom is sand and mud. Mean low water is + 1.5 ft. Height of wharf above the MLLW is 13 ft.

STEVEDORES: All stevedore work is presently performed by resident stevedores, the Marine Terminals Corporation, who also have offices in San Francisco, Long Beach, etc. They maintain an office at 111 Ponoma Street, Port Hueneme. They provide modern handling equipment to suit cargo's need. There is no special fixed bulk handling equipment available as yet. Longshoremen are members of the International Longshoremen's and Warehousemen's Union and conform to the Pacific Coast Longshore Agreement. Hours of work are as outlined in this agreement. Longshoremen at this port do all covering and uncovering of hatches and rig the gear. There are 8 gangs available in the port. Day and night gangs for Tuesday through Saturday (except Monday through Saturday, 1900 hrs. initial start) must be ordered by 1530 hrs. the previous day. Night gangs required Monday for a 1900 hrs. initial start, and Sunday and Monday gangs must be ordered by 1100 hrs. Saturday. Cancellation time is same as ordering time, if gangs which have been ordered are cancelled after the aforementioned deadlines, the agreement's 4 hour minimum applies. Normal day shifts begin at 0800 hrs. and normal night shifts at 1800 hrs. Each shift consists of 8 hours and on sailing day 10 hours may be worked by the final shift. There are no obstructions on the wharf to keep all hatches from being worked concurrently.

MEDICAL: Patients are provided with medical attention at the Medical Center, Port Hueneme, or St. John's Hospital, Oxnard California. Temporary visa must be obtained from Department of Immigration and Transportation if a crew man or passenger must remain after the ship sails.

FRESH WATER: Fresh water is available. There are hydrants along the wharf and delivery to ship is effected by hose. Water is good to taste but is hard. It is suitable for boilers. Contact wharfinger on duty for delivery of water.

FUEL: Diesel oil is obtainable from a local port-based tenant. Quantities beyond the capability of that tenant's ability can be delivered by tank truck direct to ship's tanks. In an emergency, the Navy will make Navy special black oil available.

REPAIRS: Minor repairs may be made in port. Machine shops in Ventura and Oxnard are qualified for normal voyage repair work.

GANGWAY/DECK WATCHMEN: Gangway or special wharf watchmen are available upon request.

TELEPHONES: 2 pay-telephone booths are located at the East end of Wharf 1 adjacent to the wharfingers office and one at the West end of warehouse No. 2 and maintained for the convenience of ships berthed at Wharf 1. The wharfinger's office has a telephone which may be used by people calling in to contact the ship. This phone is manned 24 hours a day for convenience. Its number is (805) 488-4615. The Port of Hueneme office telephones are available to ship's officers and Agents for local calls or collect long distance calls. Wharf lines permit a telephone to be installed at a nominal charge if desired by Agent.

HOLIDAYS: U.S. Federal and State holidays are observed by the Port and Terminal management. If stevedoring is required on holiday it is performed in accordance with the International Longshoremen's and Warehousemen's Union-Pacific Coast Longshore Agreement.

AUTHORITY: The U.S. Navy (Commanding Officer, U.S. Naval Construction Battalion Center) exercises overall Port Control Authority; the Oxnard Harbour District is solely responsible for its commercial operations.

Oxnard Harbour District Board of Harbour Commissioners, Port Hueneme.

AGENT: See "Los Angeles".

HURON, Ohio: 41.24 N. 82.35 W.

Refer to "St Lawrence Seaway" for important general information.

PILOTAGE: None required other than what is required for Great Lakes.

ANCHORAGE: Depth 3 to 10 fathoms.

MAX. SIZE: Length 716 ft., breadth 75 ft., draft 26 ft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Chicago Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: WMI Lorain.
TUGS: Meet vessel at the Pier Head. Use ship's lines.
BERTHING: Norfolk and Western Ore Dock, operated by the Lake Erie Dock Co., can handle 15,000 tons of ore in 8 hours. Ore slip is 1,400 ft. long with 26 ft. of water.

Limestone Dock, 700 ft. length with 26 ft. of water.

Grain loading facilities operated by the Pillsbury Company. Load speed, 20,000 bushels; unload speed, 15,000 bushels; berthing space, 832 ft.; max. length, 610 ft.
STEVEDORES: None available.
FRESH WATER: Available.
FUEL: None available.
IDENTIFICATION CARDS: Required by Immigration.
CONSULS: Nearest at Cleveland.
REPAIRS: No facilities.
REPATRIATION: No facilities.
AIRPORT: 50 miles from port (Cleveland International Airport).
POLICE/AMBULANCE/FIRE: 433-4114.
SHORE LEAVE: Allowed.
AUTHORITY: The Huron Joint Port Authority.

JACKSONVILLE, Florida: 30.20 N. 81.40 W.

(See Plan Book)

DOCUMENTS:
Public Health:
Maritime Quarantine Declaration Form HSM 13.19.
Customs:
3 U.S. Customs Manifests for cargo to be discharged at first port of entry.
2 U.S. Customs Manifests covering all other cargo on board vessel for discharge at other than first port of entry.
3 Stores Lists.
3 Crew Lists.
3 Passenger Lists.
3 Curio and Crew Personal Items Lists.
Vessel's Clearance from last port.
Vessel's Register and Load Line Certificate.
Vessel Utilization and Performance Report.
Form MA.578 for dry cargo vessels.
Immigration:
1 Certified Crew List and Landing Permit form I-95A for each crew member.
Valid passport for each crew member.
PILOTAGE: Vessels approach Pilot Entrance Buoy STJ No. 2 (Red) approximately 6 miles at sea off jetty entrance to St. John's River. Pilot station located just inside jetty on river channel at Mayport Naval Station. Pilot station operates both VHF and UHF frequencies, VHF Channels 16 and 18 A. UHF Frequencies 2738 and 2182. Pilot cable address "Jaxpilot". Pilot boards from Pilot boat "Jaxpilot" just East of sea buoy STJ No. 2. Pilot boat does not maintain station at sea but answers call or is dispatched on information by vessels' agents. Vessels anchoring awaiting Pilot should achor as near entrance buoy as safely possible.
ANCHORAGES: 2 anchorages located inside harbour near dock sites with depth of about 31 ft.
RESTRICTIONS: For vessel drawing not more than 30 ft. water no restrictions and vessel can enter and clear harbour on 24 hour basis. Pilots and tug assistance available all hours day or night. Vessels drawing more than 30 ft. required to await tide.
MAX. SIZE: Draft should not exceed 36 ft. for dry cargo vessels and tankers.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Miami Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Tropical Radio, Miami, Fla. Call letters WAX. Lantana Radio, Boynton Beach, Fla. Call letters WOE.
TUGS: Under normal conditions with vessels able to proceed under own power, tugs approach vessel in vicinity of pier at which vessel is to dock. Tugs use own lines but no charge made.
BERTHING: Vessels can dock day or night. Transit time from pilot station to berths about 2 hours.
Blount Island Terminal: Operator: Jacksonville Port Authority. Length of berth, 3,300 ft. Depth alongside at MLW 38 ft. (11.5 m.). Containers and general cargo are handled. One 45 gross ton Alliance container crane, 1×45 gross ton IHI container crane, 1×100-ton Clyde revolving gantry crane and 1×50-ton Clyde revolving gantry crane are available. 1 bridge crane with a span of 450 ft. and lifting capacity of 900 m. tons is now under construction over the graving dock of Offshore Power Systems at Blount Island.

2 Roll-on/Roll-off ramps are available. 1 measures 234 ft.×18 ft. and the other 212 ft.×18 ft. These ramps are designed for use with vessels having side ports.

Also see "Developments".

Tallyrand Docks and Terminals: Operator: Jacksonville Port Authority. Length of berth 2,400 ft. Depth alongside at MLW 34 ft. (soon to be 38 ft.). Cargo handled – General, Cars, Lumber and Petroleum.

Also see "Developments".

Sealand Terminal: Operator: Sea-Land Service, Inc. Adjacent to Tallyrand Docks and Terminals (See Plan). Length 1,200 ft. Depth alongside at MLW 34 ft. 2 container cranes, capacity 27.5 tons and 30 tons.

8th Street Terminal: Operator Joyserv Ltd. Adjacent to Sealand Terminal (See Plan). Length of berth 707 ft. Depth alongside at MLW 34 ft. Cars are handled.

McGiffin & Co. Terminal: Operator: McGiffin & Co. Inc. Finger Pier: Length 440 ft. depth alongside at MLW 30 ft.

Marginal Wharf: Length 1,120 ft. depth alongside at MLW 30 ft. Cargo handled: General cargo, containers, lumber and cars.

Commodores Point Terminal: Operator: Eller and Company. Length of wharf 2,750 ft. Depth alongside 34 ft. Cargo handled: Oil, cement, general cargo and chemicals. Storage facilities: Charter Oil; 340,000 barrels. Glidden – Durkee: 60,171 barrels for chemical storage. Atlantic Cement; 6 silos capacity 40,000 tons. Universal Atlas Cement; 6 silos capacity 32,000 tons.

Jacksonville Bulk Terminals: A subsidiary of Occidental Petroleum. Length of loading berth 1,000 ft. Depth at MLW maintained at 36 – 38 ft. 2 fixed loading towers capable of loading vessel at a rate of 2,850 long tons of phosphate per hour. Maximum outreach 81 ft., clearance above MLW of 40 ft. Terminal also capable of loading phosphate rock, zircon sand (of sufficiently low moisture), granular fertilizers, tackonite, ilmenitite and multite. Storage facilities: 6 concrete silos, each with a designed capacity of 5,000 tons of phosphate rock.

Dunns Terminal: Length of wharf 1,000 ft. Depth 38 ft.

Kaiser Gypsum Company†: Tel. (904) 764-0504. Berth: 635 ft. (205 m.) with dolphins. Depth: 32 ft. (9.8 m.). Terminal for receipt of gypsum rock by self-unloading vessels.

† Negotiations with Celotex Division for purchase, name may be changed.

Kerr-McGee Terminal: Tel. (904) 353-8411. Berth: 620 ft. (190 m.) with dolphins. Depth: 30 ft. (9.2 m.). Receipt and shipment of fertilizer materials.
BRIDGES: Only 1 bridge that vessel would have to negotiate and that only if docking at Commodore Point terminal.
STEVEDORES: Master should keep Agents closely advised by radio of ETA and any amendments to first ETA given. Recommended that Master give ETA 72–48–24 hours in advance to arrival. Enables ordering gangs or cancelling gangs ordered in event of delayed ETA.
MEDICAL: Hospital facilities available. International Vaccination Certificates required by all crew members.
TANKERS: All petroleum terminals provide own hose ranging from 8 in. to 12 in. Prior to arrival, Master should request information from Terminal Company size of connection required.
Private Terminals:

Amerada Hess: Tel. (904) 765-4427. Berth: 200 ft. (60.1 m.) with dolphins. Depth: 30 ft. (9.2 m.). Tank storage capacity: 460,000 barrels. Receipt of petroleum products.

Alton Box Board Company: Tel. (904) 353-3611. Berth: 750 ft. (230 m.) with dolphins. Depth: 24 ft. (7.2 m.). Receipt of residual fuel oil.

American Petrofina: Tel. (904) 355-3151. Berth: 262 ft. (80 m.). Depth: 35 ft. (10.1 m.). Tank storage capacity: 350,000 barrels. Receipt of petroleum products.

Eastern Seaboard Petroleum Company: Tel. (904) 355-9676. Berths 250 ft. (80 m.) with dolphins (1); 160 ft. (48 m.) with dolphins (2). Depth: 18 ft. (5.5 m.). Tank storage capacity: 1,266,000 barrels.

Shipping of petroleum products by barge; loading of barges for bunkering vessels at berth in the harbour; fueling of tugs and small vessels.

Gulf Oil & American Oil: Berth: 200 ft. (60.1 m.) with dolphins. Depth: 33 ft. (11.5 m.). Tank storage capacity: 900,000 barrels.
Gulf: Tel. (904) 765-5541.
American: Tel. (904) 768-2583.
Receipt of petroleum products and loading of barges.

Phillips Petroleum Company: Tel. (904) 353-6740. Berth: 205 ft. (60.2 m.) with breasting dolphins. Depth: 34 ft. (10.5 m.). Tank storage capacity: 243,000 barrels. Receipt of petroleum products.

Shell Oil Company Wharf: Tel. (904) 355-5521. Berth: 230 ft. (98 m.) with dolphins. Depth: 33 ft. (10 m.). Tank storage capacity: 448,500 barrels. Receipt of petroleum products; occasionally fuels towboats and loads barges for bunkering vessels at berth in the harbour. Light marine diesel fuel only.

Standard Oil Company Terminal: Tel. (904) 353-1094. Berths: Barge–300 ft. (92 m.) with dolphins; Tanker–760 ft. (230 m.) with dolphins. Depth: Barge–10 ft. (3.1 m.); Tanker– 32 ft. (9.8 m.). Tank storage capacity: 595,000 barrels. Receipt and shipment of petroleum products. No bunkering of vessels.

Texaco Pier: Tel. (904) 356-6344. Berth: 550 ft. (167 m.) with dolphins. Depth: 32 ft. (9.8 m.). Tank storage capacity: 320,000 barrels. Receipt and shipment of petroleum products; fuels towboats.
DENSITY: Varies from fresh water 1.000 density to mixed salt water 1.0075 density. St. Johns River is fed from fresh water sources and for most practical purposes may be considered fresh.
FRESH WATER: Potable water is available through hose connections at all berths operated by the Port Authority. No water barges.
FUEL: Most grades marine fuels available ranging from bunker "C" to light marine diesels with intermediate blends in between. Most major oil companies have bunkering facilities.
FIRE PRECAUTIONS: No smoking except in officers' lounge and crew's lounge. No open flames. No sparking from funnel.
DEVELOPMENTS: The entire river channel from the jetties on the Atlantic Ocean to the Chaseville Turn has been dredged to a minimum depth of 38 ft. MLW. Dredging is now in progress to Mile 20 which is at the Southernmost boundary of Tallyrand Docks and Terminals.

At Blount Island Terminal an additional 300 ft. of berthing space under construction and a further 900 ft. is planned.

A 50 ton revolving gantry crane is under construction at Tallyrand Docks and Terminals.

GANGWAY/DECK WATCHMEN: Watchmen services available but not necessary.

OPENING/CLOSING HATCHES: Crew may open hatches prior to vessel's arrival at dock. After arrival at dockside this work reserved for longshoremen. Vessels equipped with McGregor type or other automatic opening devices, crew may open hatches at any time. Longshoremen do not open and close these type hatches.

CERTIFICATES: Vessel Register, Load Line, Gear Certificate, Derat.

CUSTOMS ALLOWANCE: Tobacco: 200 cigarettes per man. If vessel remains in port over extended period of time, sea stores can be opened under Customs supervision and additional allowances made. Wine/Spirits: No specific limits as to quantity allowed per man; Customs accept Masters' recommendations for allowances so long as they are reasonable. This applies to beers, wines and spirits.

IDENTIFICATION CARDS: Form I–95A only.

CONSULS: Norway, Denmark, Sweden, Finland, Italy, France, Guatemala, Uruguay, Dominican Republic, Germany.

REPAIRS: All types engine and deck repairs possible. 2 well-equipped shipyards.

DRY DOCKS: 3 large dry docks of 18,000 to 33,000 tons capacity and 6 smaller with capacity of 1,000 to 12,000 tons.

REPATRIATION: Facilities available to effect crew changes and repatriation.

AIRPORT: Airport 20 miles. Daily flights to all major U.S. cities.

TIME: Eastern Standard Time and Daylight Saving Time during Summer months late April through October.

HOLIDAYS: Holidays observed by Stevedores: New Year's Day (Jan. 1st); Martin Luther King's Birthday (Jan. 15th); Lincoln's Birthday (Feb. 12th); Geo. Washington's Birthday (Feb. 22nd); Memorial Day (May 30th); Independence Day (July 4th); Labor Day (First Monday September); Columbus Day (October 12th); Armistice Day (Nov. 11th); Thanksgiving (Fourth Thursday November); Christmas (December 25th).

When holidays fall on Sunday, the following Monday observed to the extent of paying overtime and 8 hour minimum pay period shall apply. No work performed on the following holidays: New Year's Day, Independence Day, Labor Day, Christmas Day.

POLICE/AMBULANCE/FIRE: Police 633–4111; Ambulance 633–2211; Fire 633–2211.

TELEPHONES: No facilities available for placing phones on board vessels except in shipyards.

SERVICES: Compass-Adjusting, radar, navigational equipment. No tank-washing or tank-cleaning services available.

SHORE LEAVE: No restriction on shore leave if not detained by Immigration.

REGULATIONS: No garbage to be disposed overside, no pumping of dirty ballast into river. Smoke emissions must be controlled to minimum.

AUTHORITY: Jacksonville Port Authority.

JUNEAU, Alaska: 58.18 N. 134.24 W.

Located at N.E. side of Gastineau Channel, 8 miles from Stephens Passage. Juneau is the capital of Alaska. Open all year.

APPROACHES: Via Chatham Straits, Lynn Canal and Stephens Passage.

DOCUMENTS: See "Anchorage, Alaska".

PILOTAGE: Pick-up point is Guard Island.

ANCHORAGE: 16 fathoms in centre of Juneau Harbour.

MAX. SIZE: Harbour depth 15/19 fathoms. Tides: diurnal range 16.4 ft. Also see "Berthing".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

CUSTOMS: Quarantine, Immigration and Customs, local.

BERTHING: 1. Foss Alaska Line Dock: berthing length 550 ft. 36 ft. LW. No cranes.

2. Juneau Cold storage (capacity 8,000,000 lb.): berthing length 250 ft., 36 ft. LW. Cranes, 2 electric hoists, 3 lift trucks, 40,000 sq. ft. covered shed space. Fresh water.

3. Juneau Ferry Terminal: berthing length 350 ft. 32 ft. LW. No cranes. This is a roll-on, roll-off facility for wheeled vehicles and self-propelled or towed. 35 tons capacity. No covered shed space. Fresh water.

4. Coast Guard Dock: 750 ft. long, 31 ft. deep at face. No storage.

STEVEDORES: 1 gang.

REPAIRS: Minor engine repairs only.

WATER: Available.

FUEL: Not available.

MEDICAL: Hospital available.

TRANSPORTATION: Air and ferry.

DEVELOPMENTS: Berner's Bay under construction 40 miles North, will produce pulp and lumber for export.

KAHULUI, Hawaii: 20.53 N. 156.28 W. (See Plan Book)

DOCUMENTS:

4 Crew Lists.
4 Passenger Lists.
Customs Documents.
Clearance, Travelling Manifest.
Local Manifests.
Health Documents.
Bill of Health and Vaccination Certificates.
4 Manifests.
4 Bills of Lading.
Certificate of Registry.
Annual Inspection Certificate.
Load-line Certificate.
Derat Certificate.
Radio Certificate and Licence.
4 Store Lists.

PILOTAGE: Request for Pilot normally made through Agent or through Harbour Master's office. Contact Pilot on VHF Channel 16. 36 ft. pilot boat, black hull, white cabin. Pilot boards 0.25 mile East of Waihee Reef lighted buoy No. 2. Anchorage 0.5 mile East of buoy.

ANCHORAGE: No anchorage inside breakwaters. Only anchorage 0.5 mile East of Waihee Reef lighted buoy No. 2 in 9 to 12 fathoms.

RESTRICTIONS: 24 hours notice of arrival is obligatory. No tide restrictions.

MAX. SIZE: Max. length 700 ft. Max. draft 32 ft. 6 in.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Honolulu Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Communicate through RCA or ITT stations in Honolulu.

TUGS: 1 × 1,500 h.p. tug stationed at Kahului. Additional tugs dispatched from Honolulu if necessary. Tug joins vessel between breakwater and Waihee Reef lighted buoy No. 2 Tug's lines normally used. No extra charge.

CARGO HANDLING: Kahului has 1 berth specially equipped to load bulk sugar. Matson Navigation Company operates a straddler to move Matson containers. Ramps are in place at Pier No. 1 for Matson roll-on/roll-off vessels.

STEVEDORES: To be ordered by 1500 hrs. of day prior to operations.

MEDICAL: Hospital facilities available.

TANKERS: Discharge only. 8 in. line for heavy fuel oil, 6 in. lines for light fuel oils. No slop discharge facilities. 2 berths available for tankers, max. draft 32 ft. 6 in.

FRESH WATER: Available from water line at each berth. Rate of delivery about 150 gallons per minute.

FUEL: Small amount of diesel fuel and heavy fuel available in an emergency only.

GANGWAY/DECK WATCHMEN: Services of watchman recommended, usually arranged by Agent.

OPENING/CLOSING HATCHES: Normally carried out by stevedores.

CUSTOMS ALLOWANCE: 20 cigarettes, 50 cigars per man, and 1 bottle wine or spirits.

REPAIRS: Minor deck and engine repairs only.

AIRPORT: Distance to airport 1 mile. Served by regular airlines.

TELEPHONES: Arrangements made with Hawaiian Telephone Co., to install on board.

DELAYS: Occasional delays due to limited berthing space and shortage of stevedore gangs.

POLICE/FIRE/AMBULANCE: Police 244-7811; Ambulance 244-9056; Fire 244-4860.

TIME: GMT minus 10 hours all year round.

AUTHORITY: State of Hawaii, Dept. of Transportation, Water Transportation Facilities Division, Kahului.

KETCHIKAN, Alaska: 55.20 N. 131.38 W.

DOCUMENTS: See "Anchorage, Alaska."

APPROACHES: Port located on Revillagigedo Island. Open all year round. Ships coming from Hecate Straits or outside Graham Island proceed into Dixon Entrance to vicinity of Guard Island where the Pilot will meet them.

Vessels coming up the inside passage from Vancouver BC, are met at Lucy Island pilot station.

PILOTAGE: South Eastern Alaska Pilots Association, Box 1539, Ketchikan Alaska 99901. Telegraphic address; Alaska Pilots Ketchikan.

The Alaska Pilot Service required 5 days, 48 hours, and 12 hours advance notice of ETA and can be contacted on Channel 16 VHF or 2182 kHz.

The pilot boat "Magdalene" (WA 7513) normally rendezvous with the vessel 0.75 miles from Guard Islands.

ANCHORAGE: Safe anchorage can be obtained in the area for deep-draft vessels; however there are no specified anchorage areas.

MAX. SIZE: The largest vessel to be berthed to date is a 26,000 ton freighter; however larger vessels could be accommodated.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Cables to Agent, Receivers, and Pilots can best be routed through AKM Juneau.

TUGS: Tugs can be arranged through the ship's Agent. Lines from tug are normally used with no additional charge.

BERTHING: Alaska Line Dock: berthing length 400 ft., depth 26 ft. at North end, 39 ft. at South end at low water, no cranes.

Talbots' Inc: private berth length 300 ft., depth 35 ft. low water.

Ketchikan Spruce Mill: berthing length 450 ft., depth 33 ft. low water. Height of pier at low water 22 ft.

Ketchikan Pulp Company (at Wards cove, 6 miles North of Ketchikan): private dock, berthing length 800 ft., depth 33 ft. at low water.

STEVEDORES: Stevedores obtained through shipping Agent. 24 hours notice normally required.

4 or possibly 5 gangs available dependent on obtaining casual labour.

MEDICAL: Medical matters may be referred to shipping Agent. Excellent hospital and out-patient treatment facilities are available.

FRESH WATER: Ample fresh water available at no cost.

FUEL: Fuel available for deep-draft vessels: No. 2 Diesel and gasoline.

TANKERS: Tow-away lines required fore and aft.

GANGWAY/DECK WATCHMEN: Recommend security watch for passenger vessels. Watchmen can be arranged through the shipping Agent.

OPENING/CLOSING HATCHES: Done by longshoremen.

IDENTIFICATION CARDS: Crew identification cards are required by Immigration officials.

CONSULS: The nearest Consul is in Anchorage, Alaska.

REPAIRS: Repair facilities are limited. Excellent welding and machine-shop services are available, however.

REPATRIATION: Repatriation matters can be handled through the shipping Agent and Immigration officials.

AIRPORT: Daily flights to and from Seattle as well as points North may be obtained.

TIME: Ketchikan is on GMT minus 8 hours during the Winter and GMT minus 7 during the Summer. Time changes the third Sunday in April through the third Sunday in October.

AUTHORITY: Captain of the Port, c/o U.S. Coast Guard Base, Ketchikan, Alaska.

KINGS BAY, Georgia: 30.49 N. 81.31 W.

DOCUMENTS:

Crew List, from foreign movements, 1 Crew List visaed by American Consul in or near foreign port of departure; Coastwise, U.S.A., 3 copies, 1 for Customs, 1 for Immigration and 1 for the Agents' office.

Curio List, 3 copies, both from foreign and coastwise movements.

Stores List, 3 copies, both from foreign and coastwise movements.

5 copies of Foreign Manifest.

Permit to sail from foreign.

International Vaccination Certificates and/or other health certifcates.

PILOTAGE: Channel entrance is between Cumberland and Amelia Islands, and is approximately 11 miles in length, 200 ft. wide and 32 ft. deep at MLW. Kings Bay Pilot usually boards vessels at the St. Mary's Entrance Sea Buoy No. 1 or 1 mile East of St. Mary's Entrance Buoy No. 2. Pilot may be reached by marine phone (ship-to-shore), Fernandina Beach, Florida, tel. 261-3824 or 261-3495. There are 2 turning basins, one 2,400 ft. long by 800 ft. wide with project depth of 32 ft. at MLW, and the other is 1,996 ft. long by 800 ft. wide with project depth of 32 ft. at MLW.

ANCHORAGE: 2, capable of handling deep draft vessels. Pilot handles this phase.

MAX. SIZE: 650 ft. in length, project depth 32 ft. at MLW

HEALTH: See "Health: All Ports" before first U.S. port Albany). Illness reports made to Miami Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Kings Bay has only marine ship-to-shore telephone facilities. Cables arrive through R.C.A. Communications via Lantana, Fla., Radio, and Chatham, Mass., Radio via Western Union.

TUGS: Available from Brunswick.

BERTHING: Daylight berthing and sailing only.

STEVEDORES: All stevedoring performed by St. Mary's Stevedoring Company, St. Mary's, Ga., on high explosives. General cargo outside stevedores permitted.

FRESH WATER: Plenty of fresh water available, pumped into ship's tanks via hose.

FIRE PRECAUTIONS: Smoking in the warehouses, on wharf or on any vessel while unloading or discharging any inflammable or explosive cargo is strictly prohibited. In the event of a fire occurring on board any vessel berthed at the Kings Bay Marine Terminal, except vessels under way, such vessel may sound 5 prolonged blasts of the whistle or siren as an alarm indicating fire on board or at the dock to which the vessel is moored. Fire hose on dock and water running therefrom when loading plus fire extinguishers placed at various intervals.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Crew open, stevedores close.

CUSTOMS ALLOWANCES: Tobacco and wine/spirits – reasonable quantities for personal use.

IDENTIFICATION CARDS: Immigration issues landing permit.

REPATRIATION: Via airlines at Jacksonville, Florida, 41 miles away.

TIME: Eastern Standard Time.

HOLIDAYS: New Year's Day (1st January); Lincoln's Birthday (12th February); Washington's Birthday (22nd February); National Memorial Day (30th May); Independence Day (4th July); Labor Day (1st Monday in September); Colombus Day (12th October); Thanksgiving Day (4th Thursday in November); Armistice Day (11th November); Christmas Day (25th December). In the event of one of the above holidays falling on a Sunday, the following Monday will be observed.

POLICE/AMBULANCE/FIRE: Police Departments St. Mary's and Kingsland, Ga., plus County Sheriffs. Ambulance, Kingsland. Fire, both Kings Bay and St. Mary's Ga.

TELEPHONES: Only 3 lines and all in office of Blue Star Shipping Co. No telephone service to be placed on board vessel.

SHORE LEAVE: Only via Immigration landing permit. No taxi service, no bus lines operate from Kings Bay, Ga. Since nearest town is 11 miles away, crew as a rule remain aboard vessel.

AUTHORITY: None. Blue Star Shipping Corporation, St. Mary's, Ga., operates the port.

KODIAK, Alaska: 57.47 N. 152.24 W.

Located near the N.E. tip of Kodiak Island in the Gulf of Alaska, South of Anchorage and East of the Alaska Peninsula.

APPROACHES: South of Trinity Islands then N.W. to Cape Chiniak and meet Pilot.

DOCUMENTS: Also see "Anchorage, Alaska".

PILOTAGE: Pick-up point in the vicinity of Cape Chiniak.

MAX. SIZE: Harbour depth in excess of 30 ft. Tides; diurnal range approximately 10 ft. Also see "Berthing".

HEALTH: See "Health: All Ports" before first U.S.A. ports (Albany). Illness reports made to Anchorage Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

ANCHORAGE: Fair weather anchorage only.

CUSTOMS: Quarantine, Immigration and Customs, local.

TUGS: From Anchorage.

BERTHING: 1. Kodiak City Dock: made of timber, pile and steel deck. 1 berth only. 350 ft. by 50 ft. Covered warehouse on half of pier 200 ft. by 150 ft. 35 ft. MLLW. Heated space available.

2. Woman's Bay Naval Base: Finger Pier 600 ft. operated by U.S. Navy. Depth of water in excess 40 ft. U.S. Navy permission required for commercial use.

STEVEDORES: 2 gangs.

REPAIRS: Limited. Divers available.

WATER: Available.

FUEL: Light fuels only.

MEDICAL: 26-bed hospital, 3 doctors, 2 dentists, 1 optometrist.

TRANSPORTATION: Air and ferry.

LAKE CHARLES, Louisiana: 30.13 N. 93.15 W.

(See Plan Book)

PORT LIMITS: Buoy No. 26, In Calcasieu Ship Channel, 3 miles off Cameron, Louisiana.

DOCUMENTS:

U.S. Customs: If foreign cargo on board for discharge at any port:

3 copies of Cargo Manifest of all Cargo.

3 copies of Crew List.

3 copies of Store List.

3 copies of Curio List (crew personal effects).

3 copies of Passenger List if carrying passengers.

If vessel in ballast, only 2 copies of above documents required.

If vessel in ballast and carrying passengers, 3 copies of above documents required.

1 copy of Clearance from last port.

2 copies of Customs Form 1300 (Master's Oath).

2 copies of Customs Form 1301 (General Declaration).

U.S. Customs Boarding Officer must examine Load Line Certificate. Safety Equipment Certificate, Tonnage Tax Receipt, Certificate of Financial Responsibility (Oil Pollution), Ship's Register, and Ship's Certificate of Nationality (if any).

2 copies of Customs Form 721 (Inbound Utilization Report).

1 copy of Certified Crew List (If American Ship).

Bonded lockers will be sealed by Customs.

U.S. Immigration:

1 copy of Visaed Crew List from American Consul at foreign port of clearance (if any).

1 I-95 (Identification Card) for each crew member on board.

All passports must be validated for each crew member.

U.S. Bureau of Etomolgy:

All meat lockers and freezers with restricted meat will be sealed. All fruit from prohibited countries will be confiscated. All animals or birds from foreign countries must remain on board.

PILOTAGE: Radio Agent ETA, who will arrange Pilot board at Calcasieu Bar.

ANCHORAGE: At Calcasieu Bar only.

RESTRICTIONS: Entrance channel 40 ft. depth. Distance 40 miles.

MAX. SIZE: 1,000 ft. length, 38 ft. draft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.

AGRICULTURE: See "Agriculture" before first USA port (Albany).

RADIO: Tropical – New Orleans, WNU.

VHF: Pilots may be contacted on Channel 12, 13, 65 and 66.

TUGS: Meet vessel 30 minutes away from berth. Use tugs' own lines. 2 for berthing, 2 for unberthing.

BERTHING: General Cargo Berths: 10 with total length: 5,675 ft. All have draft of 36 ft. (fresh water).

CRANES: Mobile pneumatic and track cranes available with lifts up to 50 tons.

BULK HANDLING FACILITIES: 3 bulk-loading berths: No. 1, West bank of Calcasieu River, 8 miles below main port facilities, 960 ft. length, 35 ft. depth, loading rate 1,250 t.p.h.

No. 2, Contraband Bayou Section, main port, 920 ft. length, 35 ft. depth, loading 480 t.p.h. 1,600 tons storage facilities.

No. 3, Contraband Bayou Section, main port, 320 ft. length, 35 ft. depth, loading rate (bulk rice) 180 t.p.h. from stationary tower. Twin 1,250 tons storage tanks adjacent.

SPECIALIZED CARGO HANDLING FACILITIES: 1 berth suitable for Roll-on/Roll-off traffic. 1 berth at main port for liquid chemicals. Private berth to be constructed for private firm for receiving LNG.

BRIDGES: 1 with vertical clearance of 135 ft.

STEVEDORES: Notice of firm ETA and request for gangs must be received prior to 1600 hrs. CST for work following day.

TANKERS: Cities Service Oil Co. B-Dock, 673 ft. length, 36 ft. depth; C-Dock, 660 ft. length, 34 ft. depth; D-Dock 665 ft. length, 36 ft. depth.

Continental Oil Co. Berth 1, 1,000 ft. length, 40 ft. depth; Berth 3, 1,000 ft. length, 40 ft. depth.

Columbia Southern Dock, 700 ft. length, 40 ft. depth.

Olin Mathieson Dock, 400 ft. length, 28 ft. depth.

SHIPMASTERS REPORT: 1977.

Cities Services Oil Co., Clifton Ridge:

Location: 30° 09′ 32″ N., 93° 19′ 30″ W.

Max. Size: Length 805 ft., beam 115 ft., draft 39 ft. (FW).

Density: 1005.

Restrictions: Vessels may berth and unberth at any stage of the tide day or night.

Anchorage: At Bar: 2 miles East of seabuoy in depth of 42 ft. For Bunkering: South of Clooney Island in Old Calsasieu River Channel in midstream.

Distance to Berth: Seabuoy to berth 45 miles.

Terminal Information: 2 × 10 in. Chiksan arms. Max. discharge pressure 150 p.s.i. Derricks not required. Accommodation ladder not required.

Services: Fresh water, provisions, fuel oil, diesel and lube, doctor, hospital, airport and laundry.

The following services are not available: Repairs, drydocks, Lloyd's Surveyor and slop tanks.

Telephone Numbers: Dock 318-583-2432. Terminal Supervisor 318-491-6121, 491-6437.

MEDICAL: Hospital facilities available.

DENSITY: Saltwater in Summer, fresh water in Winter. Allow density 1000 for drafts.

FRESH WATER: Available at all berths.

FUEL: Bunker "C" and diesel available at Cities Service berths; other berths served with bunkers by barge.

FIRE PRECAUTIONS: Usual.

DRY DOCKS: None.

SURVEYORS: National Cargo Bureau.

GANGWAY/DECK WATCHMEN: Not required.

HATCHES: Rigging performed by stevedores. McGregor-type hatches opened by crew, others by stevedores.

CARGO GEAR: Shore cranes available at ship's request.

CUSTOMS ALLOWANCE: At the discretion of Customs officers. Normal allowance is 200 cigarettes or 2 lb. tobacco and 1 quart wine or spirits per man. Additional allowances may be given if considered necessary, due to length of vessel's stay in port.

REPAIRS: Small repairs carried out only; very limited facilities.

REPATRIATION: Facilities exist. Arrange through Agent.

AIRPORT: 7 miles from port. 2 lines (TI, OQ) 15 flights per day.

TIME: CST, that is GMT minus 6 hours.

HOLIDAYS: Only 2 days affected on which no work carried out – Labor Day and Christmas Day.

POLICE/AMBULANCE/FIRE: Police, 439-4511; Ambulance, 477-5530; Fire, 433-4633.

TELEPHONES: None on board ship.

SHORE LEAVE: Allowed if not detained by Immigration.

IDENTIFICATION CARDS: Standard U.S. Immigration Forms I-95 to be made up for each crew member on arrival. Not necessary for crew man already holding Form I-95, issued for the same vessel.

DELAYS: Very few delays encountered at any berth.

DEVELOPMENTS: Under construction – high speed facility for loading wood chips. In operation: Grain elevator.

AUTHORITY: Lake Charles Harbour and Terminal District, Director of Port.

LONG BEACH, California: 33.45 N. 118.13 W.

(See Plan Book)

DOCUMENTS:

Certificate of Registry.

International Load Line Certificate – Tonnage Certificate (Admeasurement).

Inspection Certificate.

Derat certificate.

Radio Safety Certificate.

Inbound cargo for discharge – United States must have a Travellers' Manifest (Form 7527), original manifest, and dock inspection copy covering cargo to be discharged at first U.S. port of entry, Custom's Utilization Form 7801 (Inbound), Form 7802 (Outbound) must be filed within 10 working days after vessel's entry at first U.S. port. Landing permits must be made out prior to arrival (Form I-95-A) for each crewman of alien origin for the U.S. Department of Immigration (and Form I-94 for each passenger of alien origin). 3 sets of crew lists (Form I-418) must be presented to U.S. Customs, plus 2 sets to the Immigration Inspector, and 1 for the U.S. Public Health Service (Quarantine), and 3 sets stores lists plus 3 sets curio purchases list for U.S. Customs.

American Ships from Foreign:

Safety Equipment Certificate.

Cargo Ship Safety Construction Certificate.

Customs Form 3415 Affidavit of Repairs Abroad.

Certified Crew List.

Foreign Ships:

1 copy of Visaed Crew List for Immigration (Form I-418 & 5 copies). Other forms may be necessary under certain circumstances, but normally can be taken care of after the vessel's arrival.

If a foreign vessel from a foreign port departs for a foreign port, 2 copies of (Form I-418) covering crew changes in the United States must be submitted to the Department of Immigration upon sailing of the vessel.

(*a*) Number of copies required: all single except as noted.

(*b*) The reports mentioned above are all government laws, requested by U.S. Customs, U.S. Immigration, Department of Agriculture, Public Health Service, and B.I.A.

(*c*) Purpose of documents: to record all vessel movements such as cargo, crew changes, health standards, etc.

(*d*) Procedure of presenting documents: documents must be presented to Quarantine Boarding Officer and Customs Broker and/or Agent, during or immediately after Quarantine.

PILOTAGE: Pilots ordered by local Agents. Order placed by telephone to 435-6354. Local tariff requires 1 to 2 hours notice prior to arrival. Pilot station contacted on VHF radio Channel 12 (156.6 mHz) or Channel 16 (156.8 mHz). Call sign KMA-372 Long Beach Pilots. Pilot boats motor cruisers, light grey, fly International Flag "H". Local whistle signal for a Pilot on ship's whistle, 1 short and 1 long blast. Pilot boat normally meets vessels in vicinity Long Beach Sea Buoy or approximately 1 mile South of breakwater entrance. Vessels should have a Pilot ladder on starboard side, weather permitting. In bad weather vessels may be required to proceed inside breakwater entrance prior to Pilot boardg.

ANCHORAGE: Preferably outside anchorage approximately 0.5 mile S.E. of Long Beach Sea Buoy in 66 ft. of water. Inside anchorage available N.E of channel in outer harbour at approximately 8 fathoms of water depth. Special explosive anchorages available by request, on both sides of entrance channel in 48 ft. of water.

RESTRICTIONS: Vessels with dangerous cargoes aboard or loading or discharging such cargo within port district shall obtain permit from U.S. Coast Guard, countersigned by Long Beach Fire Prevention Bureau and Long Beach Port Authority, subject to safety inspection prior entry to assigned anchorage or berth. (Application for entry or handling dangerous cargoes must be requested by Steamship Company or authorised Agent and approved prior entry.)

Also see "Tankers" last paragraph.

MAX. SIZE: (1) Designed depth of water at general cargo berths is 30–36 ft. at MLLW.

The Entrance Channel is maintained at 60 ft. MLLW.

(2) No restriction as to length or breadth of vessel at general cargo berths.

(3) Dry bulk facility berths designed depth at MLLW is 42 ft. No restriction on length. However, ships with over 130 ft. beam might experience some difficulty in loading without turning ship.

There are 5 bulk oil facilities, 2 with 55 ft. of water at MLLW and 3 with 49 to 37 ft. of water at MLLW alongside berths. It is feasible that vessels over 1,000 ft. in length could use the deep-water oil facilities. There are no restrictions as to beam. A sixth bulk oil terminal is planned which will accommodate vessels in the 200,000 d.w.t. class, drawing up to 62 ft.

HEALTH: See "Health; All Ports" before first U.S.A. port (Albany). Illness reports made to Los Angeles Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (albany).

RADIO: Station KOU Marine Operator, San Pedro.

Channel 1—ship transmit on 2009 kHz
ship receive on 2566 kHz

Channel 4—ship transmit on 2126 kHz
ship receive on 2522 kHz

Station KOU also monitors Channel 16 (156.8 mHz) and Channel 26 (157.3 mHz) for distress, safety and calling.

RADAR/VHF: Radar service provided to vessels only if Pilot aboard, in which case radar advisory information will be fed from shore-based radar at Pilot station.

Station	*Channel*	*Frequency (mHz)*
Distress, Safety and Calling	16	156.8
Marine Exchange	12	156.6
	14	156.7
Long Beach Pilots	12	156.6
Los Angeles Pilots	14	156.7
Harbour Tugs	65	156.275

Station	*Channel*	*Frequency (mHz)*
San Pedro Tugboat Co. "Red Stack Tugs" Company Office	10	156.5
Universal Marine	18A	156.9
Wilmington Transportation Co. Company Office	7A	156.35
H-10 Water Taxi	7A	156.35
San Pedro Telephone Marine Operator Station KOU	26	157.3
Mandatory Bridge to Bridge	13	156.65

TUGS: Tugs will meet vessel inside breakwater prior reaching inner harbour area. Pilot and tugs are in communication.

BRIDGES: No restrictions into port of Long Beach. The Gerald Desmond Bridge over Back Channel has vertical clearance of 155 ft. Cerritos Channel which connects Long Beach through back channel to Port of Los Angeles has 2 bridges which must be opened for passage of vessels.

Signal for Opening: 3 long blasts on horn or whistle. During inclement weather, call through a megaphone or loud and distinct stroke of bell.

BERTHING: No requirements as to time of entry providing berthing arrangements have been made with Port Authority. Assignments classified as follows:

Preferential Assignments. Secondary Assignments, Subordinate Right granted for use of Preferential Assigned Berth. Temporary Assignment – temporary permission granted to use certain berth.

Note: All berth assignments shall be held by Assignee subject provisions of Port of Long Beach Tariff as to charges, rates, rules and regulations applicable thereto, and to all of terms, conditions and provisions contained in such assignment.

General Cargo:

	No of berths	*Total length (ft.)*	*Depth (ft.)*
Pier A	10	6,312	30–36
Piers B, C, D	12	7,686	31–36
Pier F	4	2,467	32–36
Piers 1 and 2	6	3,000	36

BULK HANDLING FACILITIES: *Berth 28–29:* Length 993 ft., depth alongside 43 ft. 1 fixed bulk loading tower with hinged cantilevered boom with 31 ft. 6 in. outreach. Max. loading rate 800 t.p.h. Cargo handled: Borax, coal, coke, iron ore, pitch, potash, soda ash and zinc ash.

Berths 30–31: Length 992 ft., depth alongside 43 ft. 3 electric, travelling, revolving, high-tower, full-portal gantry cranes, each with lifting capacity of 30 tons. Cranes can be equipped with buckets and hooks, or electric magnets. Loading rate 200 t.p.h. each crane. Types of carggo handled: steel and iron scrap, pig iron, steel slabs, ore, urea, bauxite, rutile sand.

Berths 210–211 (Grain Terminal); Length 1,100 ft., depth alongside 40 ft. Travelling Gantry ship loader having a loading capacity of 65,000 b.p.h. connected to an overhead shipping gallery and belt conveyor system. This belt conveyor system connects to another transfer gallery extending from the grain elevator and silos (2,225,000 bushel storage capacity).

The grain terminal is equipped with the latest state-of-the-art dust collection system. There is an aerveyor system for ship discharging.

Berths 212–215 (Bulkloader); Length 2,110 ft., depth alongside 34 ft. Depth 9 ft. off the berth is 40 ft. Breasting camels 20 ft. wide available. Stockpile area 85,682 sq. ft. (7,960 sq. m.). 1 electric, travelling, bulk shiploader with retractable, straight-line bridge boom having 58-ft. outboard reach-height of 60 ft. above MLLW. Boom equipped with 48-in. electric belt conveyor and a telescopic loading spout with mechanical trimming head. Loading rate 4,000 long tons per hour. Shiploader travels along rear of face for distance of 1,485 ft. Bulk materials are handled by 48-in. and 54-in., electric belt conveyor system extending to shiploader through tunnel reclaim from car unloading sheds and storage areas. Types of cargo handled: iron ore, coke, coal.

Open storage: 225,000 tons.

Covered storage: 270,000 tons.

CONTAINER HANDLING FACILITIES: *Berths 227–228–229:* Length 1,950 ft., depth alongside 42 ft. Pier G expansion: New land has been created on the East side of Pier G to provide for a 65-acre (26.3 hectares) container terminal which is leased to Sea-Land Service Inc. This terminal is complemented by an adjacent 16.3 acre, (6.6 hectares) container freight station, also leased to Sea-Land. The project includes a reinforced concrete wharf, 4 travelling 30 long ton container cranes with 100 ft. span and 115 ft. outreach, surfaced storage area. There is space for storing 6,541 TEU containers, including 242 spaces for refrigerated containers.

Berth 230: Length 650 ft., depth alongside 42 ft. 2×30 long ton, travelling container cranes with 100 ft. span and 115 ft. outreach. Has space for storing 1,784 TEU containers, including 50 spaces for refrigerated containers.

Berths 232–233–234: Length 2,300 ft., depth alongside 36, 36, 42 ft. respectively. 4×30 long ton electric, travelling Paceco container cranes, each with hinged cantilevered boom with 113 ft. outboard reach. 6 Paceco 40 ton capacity transtainers. Has space for storing 7,323 TEU containers on chassis, plus 200 empty chassis and 140 spaces for refrigerated containers.

Berths 245–246–247: Length 2,100 ft., depth alongside 36 ft. 3 travelling shore container cranes of 45-ton and 40-ton capacity and one 40-ton transtainer. The only public container terminal in Southern California. Expansion of container freight station provides 88,600 sq.ft. inside storage area. Has space for storing 7,435 containers TEU.

SPECIALISED CARGO HANDLING FACILITIES: *Berths 32–33 (Tallow, Coconut Oil, Bulk Copra):* Length 824 ft., depth alongside 36 ft. 2×6-in. pipe-lines extend from Berth 32 to 9 coconut oil storage tanks, total capacity 7,750,000 lb.; 12 tallow storage tanks, total capacity 48,211,300 lbs. (24,105 short tons).

Berth 83 (Gypsum, Lumber, Oil, Gasoline): Length 600 ft., depth alongside 38 ft. Vessels unload gypsum rock into an adjustable, elevated, receiving hopper at pier face, served by an elevated 36-in., electric belt-conveyor system extending to a 60,000-ton capacity dome-roof storage building in rear. Open storage: 335,075 sq.ft.

Berth 122 (Auto or Multi-purpose); Length 765 ft., depth alongside 40 ft. Multi-purpose open berth capable of handling vessels with self-contained or mobile cranes, lumber, steel and other general and special cargoes. Also ideally suited for automobiles. An adjacent 12.4 acre storage area is available for autos and other commodities. Dolphin and cat walk design to accommodate large vessels.

Berths 243–244: Length 1,200 ft., depth alongside 42 ft. These berths are shared by Port Auto Terminal No. 1, operated by Toyota Motor Sales and covering 35 acres, and Port Auto Terminal No. 2, operated by the Pasha Group and covering 40 acres. Toyota's facility provides for offices, warehousing, dewaxing, painting, repairing and accessory installation, with 28,000 sq.ft. under roof and storage for 6,000 automobiles. Pasha's facility furnishes an automobile preparation centre, offices and dewaxing operation, with 41,000 sq.ft. under roof, plus storage area for up to 21,250 automobiles.

Berth 208 (Bananas); Length 550 ft., depth alongside 40 ft. 4 electric, travelling banana unloaders, total capacity 3,000 banana boxes per hour. Electric, belt-conveyor system transfers banana boxes from unloaders to 2 rail car and truck loading platforms and to interior of harbour banana warehouse. Banana warehouse is divided into cold storage and ripening areas. Truck loading platform along West side.

Berth 209 (Salt): Length 550 ft., depth alongside 40 ft. Vessels unload bulk salt into a receiving hopper at outer end of a moveable, inclined, 48-in., electric belt conveyor. This conveyor serves an adjustable elevated receiving hopper at outer end of an elevated, 48-in., electric belt-conveyor system extending to a large open storage area in rear. Unloading rate: 800 t.p.h.

Berth 242 (Liquid Bulk): Length 700 ft., depth alongside 36 ft. Storage capacity: 12,920,800 gallons in tanks ranging in size from 6,000 to 3,000,000 gallons. Product handling equipment: the pumping and pipe-line system is designed to load and unload products to and from barges, ships, rail cars and trucks. Large, heavy-duty pumps efficiently handle a variety of bulk liquids. Molasses is the principal cargo handled.

CRANES: Barge cranes available capacity 45-175 tons. A U.S. Navy floating crane capacity 385 tons available for hire. There is also a derrick barge in the area capacity 500 tons that can handle 750 tons over the stern.

MEDICAL: Advance notice preferable. Adequate hospital and medical facilities available for providing necessary or emergency care. From information available, Public Health Department may, if required, request certain information prior to granting free pratique for inoculations, Vaccination/Fever Certificates.

TANKERS: There are 4 tanker berths available, operated by private companies, in addition to the 7 municipal tanker berths now in operation and 1 in planning stage. Berths have 55 to 37 ft. of water alongside at MLLW. The range between MLLW and MHW is about 3.7 ft. Extreme range of about 9 ft. may occur at times of maximum tide. Chiksan loading and discharge arms are used and adapters available for various size fittings. Tanks available for discharge of ship's residue and SG and API local type oil (loading or discharging).

Petroleum Handling Facilities; Berths 84–87. Length 1,970 ft. Depth alongside 52 ft. Mechanical equipment discharge capacity 32,000 bbls/hour. 24 in. pipe-line to storage and tank farm.

Berths 118–119: Length 1,210 ft. Depth alongside 55 ft. Discharge capacity 50,000 bbls/hour. 14 in.–24 in. pipe-line to storage and tank farm.

The following is part of a letter sent by the Captain of the Port to a tanker operator:

The safety of the port and the VLCC tankers using the harbour for bunkering and provisioning is of paramount concern to the Coastguard. Consequently the following guidelines have been established for all such vessels 200,000 d.w.t. and larger when utilising the Outer Harbour (inside of the breakwater) of the ports of Los Angeles/Long Beach:

a. Vessels may enter or depart the harbour areas inside of the breakwater only during daylight.
b. Minimum visibility of 1 mile is established for vessel movement.
c. Adequate tugboat assistance shall be provided when passing through the breakwater entrances upon entering or departure, and when navigating inside of the breakwater to and from anchorages.
d. A qualified Pilot must be onboard when entering or departing the harbour. One way traffic is to be maintained during the VLCC's transit through the breakwater entrance.
e. Vessel must have a 10% draft clearance under the keel when crossing either the Los Angeles or Long Beach entrance.

f. No "dead ship" status will be permitted without prior approval of the Captain of the Port.

g. No vessel with a beam in excess of 200 ft. shall enter either harbour without the permission of the Captain of the Port.

DENSITY: Local water density 1.025 grams per millilitre or pure sea water at all stages of tide.

FRESH WATER: Potable fresh water available all Municipals berths through 2 in. lines . Rental charge for use of each 50 ft. length water hose when furnished.

FUEL: All grades (viscosities) of bunker fuels available in any amount through pipe-lines at most Municipal berths, and by barge at anchor or at berths if desired. Notify quantity and type desired to local Steamship Company or Agent.

FIRE PRECAUTIONS: 2 fire boats and 1 fire station; in addition City fire service available.

Special fire precautions required at all berths handling petroleum products or dangerous cargoes. In addition to all applicable provisions of Long Beach Municipal Code, flammable and combustible liquids and flammable gases shall be handled and stored at Marine Petroleum Terminals in accordance with minimum fire safety requirements promulgated by Chief, Department of Fire, City of Long Beach.

DEVELOPMENTS:

(1) The complete containerisation complex consists of 13 cranes, 10 berths and nearly 300 acres.

(2) A new bulk oil terminal is planned to accommodate vessels up to 200,000 d.w.t. drawing 62 ft.

GANGWAY/DECK WATCHMEN: Normally used, but only compulsory when detainees aboard.

OPENING/CLOSING HATCHES: Crew can open or close hatches at sea or at anchor. If closed or opened at dockside, the use of longshoremen compulsory.

CUSTOMS ALLOWANCE: Tobacco, each crew member entitled to 300 cigarettes, 50 cigars and 3 lb. of tobacco or combination of above. If the stay in port is such that additional tobacco is required, Customs will so issue. Wine and/or Spirit, not to exceed 1 quart of alcoholic beverage each adult non-resident. This exemption for alcoholic beverages may be applied to more than one kind but not to an aggregate volume of more than 1 quart for each adult crew member.

Note: Upon arrival of vessel from foreign port, or vessel engaged in foreign trade from a domestic port, sea stores and ship's stores not required for immediate use or consumption on board while vessel in port, and articles acquired abroad by officers and members of crew, for which no permit to land has been issued, shall be placed under seal, unless Customs Officer is of the opinion that circumstances do not require such action.

CARGO GEAR: Employer shall not use ship's cargo handling gear until he has ascertained that vessel has a current and valid Cargo Gear Register and Certificate indicating that cargo gear has been tested, examined and annealed in accordance with requirements of International Labor Organization Convention No. 32.

IDENTIFICATION CARDS: U.S. Department of Justice Immigration and Naturalization Service Form I-95-A (Form I-94 for passengers) must be completed.

CONSULS: In Los Angeles. (Area code 213)

	Tel. No.		Tel. No.
Argentina	938-2073	Jordan	240-9405
Austria	380-7990	Kenya	274-6635
Barbados	882-5227	Korea	931-1331
Belgium	385-8116	Latvia	620-0300
Bolivia	624-7299	Lebanon	462-5384
Botswana	628-7341	Liberia	232-2535
Brazil	937-5166	Lithuania	889-7724
Canada	627-9511	Luxembourg	394-2532
Chile	624-6357	Malawi	889-4173
China	389-1215	Malaysia	681-2033
Colombia	382-7308	Malta	685-6365
Costa Rica	462-7118	Mexico	624-3261
Denmark	387-4277	Monaco	382-4969
Dominican Republic	469-2522	Netherlands	380-3440
Ecuador	628-3014	New Zealand	477-8241
El Salvador	622-2984	Nicaragua	622-2761
Estonia	463-5542	Norway	626-0338
Ethiopia	879-1222	Panama	383-6608
Finland	385-1779	Paraguay	(714) 963-7796
France	272-5452	Peru	628-9442
Germany	852-0441	Philippines	387-5321
Great Britain	385-7381	Portugal	277-1491
Grenada	340-0171	Senegal	479-2346
Guatemala	629-1901	South Africa	625-3545
Guyana	879-9889	Spain	931-1284
Haiti	748-3506	Sri Lanka	553-0555
Honduras	623-2301	Sweden	473-0901
Iceland	981-6464	Switzerland	388-4127
Israel	651-5700	Thailand	380-4400
Italy	473-2981	Turkey	277-0595
Ivory Coast	550-1288	Venezuela	622-0133
Jamaica	753-4035	Western Samoa	666-2154
Japan	624-8305		

REPAIRS: Within greater port area facilities to accomplish all types of deck and engine repairs.

DRY DOCKS: Within greater port area 3 large private commercial dock yards, Bethlehem Shipbuilding and Repair, and Todd Shipyard Corporation, and California Shipbuilding and Drydock Co. with large floating dry docks and repair facilities. Also, 3 large capacity graving docks located at Naval Shipyard available for emergency use by merchant vessels when not occupied by naval vessels.

REPATRIATION: Through U.S. Department of Justice Immigration and Naturalization Service, and clearance of personal effects by U.S. Customs.

AIRPORT: Los Angeles International Airport approximately 18 miles from port, and provides regular scheduled and international airline service.

TIME: GMT minus 8 hours. United States observes Daylight Saving Time, begins at 0200 hrs. on last Sunday of April each year and ends at 0200 hrs. on last Sunday of October of each year.

HOLIDAYS: The subject Legal holidays are defined as follows: New Year's Day (1st January); Lincoln's Birthday (12th February); Washington's Birthday (3rd Monday February); Memorial Day (Last Monday May); Independence Day (4th July); Labor Day (1st Monday September); Admission Day (9th September); Columbus Day (2nd Monday October); Veterans' Day (11th November); Thanksgiving Day (4th Thursday November); Christmas Day (25th December).

Notes: (1) Also, every Statewide Election is a holiday.

(2) Also, any other legal holiday that may be proclaimed by State or National authority is a holiday.

(3) When one of the above days falls on Sunday, the following Monday shall be observed as a holiday.

POLICE/AMBULANCE/FIRE: Port of Long Beach – Police 436-9811; Ambulance 436-9811 or 436-8211. Fire 436-8211; Harbour Security Officer 437-0041; U.S. Customs 436-3916.

In an emergency and unable to dial direct – dial operator giving telephone number and exact location where emergency exists.

TELEPHONE: Installation of telephone aboard ship at Municipal berths.

GENERAL: For information regarding various social organisations, call 436-9041. Long Beach Recreation Department, for information.

SERVICES: All services from tank cleaning to compass and instrument repair available at various locations within greater port area.

SHORE LEAVE: Crewmen allowed shore-leave providing necessary application presented to U.S. Immigration Officer is approved and crewmen's Landing Permit issued (Form I-95A). Customs declaration required for articles to be landed by crew members (1 quart of alcoholic beverage with seal broken is allowed).

DELAYS: Arrival at berths are normally on time as scheduled. However, there are times of inclement weather or lack of cargo at a berth which create a short delay. Shortage of longshoremen can also cause a delay in discharging or loading cargo. No delay experienced in bunkering.

AUTHORITY: Board of Harbor Commissioners, Port of Long Beach.

AGENT: See "Los Angeles".

LONGVIEW, Washington: 46.10 N. 122.55 W.

(See Plan Book)

DOCUMENTS:

3 Complete Cargo Manifests.
3 Store Lists.
3 Possession Lists.
3 Crew Lists on Immigration forms.
Vessel Documents.
Tonnage Tax Statement.
Quarantine Form completed.

At first port of arrival, ship is boarded and inspected by Customs, Immigration, Public Health and Agriculture officials. At each subsequent port only Customs Agent will board prior to docking.

PILOTAGE: See "Portland, Oregon".

ANCHORAGE: Safe anchorages indicated by Columbia River Pilots.

RESTRICTIONS: None in regard to arrival time or state of tide. Channel depth 40 ft. at mean low water and tidal range varies between 2.5 and 4 ft.

MAX. SIZE: No limitation on length or breadth. Draft limited to 40 ft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: Columbia River Pilots have knowledge of tug positions and other knowledge pertaining to tugs aiding a vessel.

BRIDGES: One bridge crossing Columbia River at Longview has sufficient clearance so as not to present a problem. Clearance 169–185 ft. depending on season.

BERTHING: 7 berthing facilities are operated by the Port of Longview starting immediately adjacent to the Longview Bridge and running upstream for a distance of 0.91 miles.

Berths 1 through 4 form one continuous wharf 2,155 ft. long. Berths 1, 2 and 3 are equipped to handle general cargo, logs, tallow, petroleum products and a limited number of containers. 2 multi-purpose travelling gantry cranes serve Berths 1 and 2 and a 600-ton capacity twin-boom derrick for heavy equipment lifts is located at Berth 3. The 3 berths are served by a system of pipe-lines through which petroleum can either be received from tankers and barges or pumped to vessels for bunkering purposes. A bulk liquid plant used for the storage and transferring of tallow serves Berth 2. 5 transit sheds with a total capacity of 144,876 sq. ft. are located along the 3 berths, and railway trackage consists of 1,500 ft. of surface track on the wharf apron plus 2 spur tracks under the gantry cranes.

Berth 4 is used primarily for the receiving and shipping of grain and serves a 5,165,000 bushel capacity grain elevator leased to the Continental Grain Company. The 655 ft. berth is equipped with an overhead grain gallery extending along the wharf with 5 loading spouts. A marine leg at the rear of the wharf is used for unloading grain from barges.

Berth 5, located upstream from Berth 4, is a 515 ft. wharf which extends to 691 ft. with mooring dolphins fore and aft. It was constructed primarily for receiving alumina by self-unloading vessels, but can be adapted to handle most types of bulk ores, minerals or chemicals with modifications. The berth is also used for loading logs from the river with ship's gear and for handling barge traffic. 2 storage tanks are located near the berth with a total capacity of 25,000 tons of alumina.

Berths 6 and 7 form a continuous wharf 1,500 ft. long, with the last 96 ft. upstream portion at an 8 ft. lower level. The berths are equipped to handle general cargo, logs, lash barges, containerized cargo and, at the lower portion, Roll-on/roll-off vessels. Adjacent to the cargo handling area is an open storage site of approximately 14 acres and 2 transit sheds with a total capacity of 120,604 sq. ft. A gantry crane serves both berths and 3 rail tracks are located along the length of the wharf apron.

The Port operates its own facilities and performs all terminal services between ship's tackle and consignees or inland carriers. The only exception is the operation of the grain elevator facility, which is leased to the Continental Grain Company.

In addition to these facilities operated by the Port, there are 9 other berths operated privately in the Longview Port District. Weyerhaeuser Company owns 6 berths and Reynolds Metals Company, International Paper Company and Longview Fibre Company each operate 1 berth apiece. 6 of the 9 berths are used primarily for export while the other 3 are used mainly for receiving raw materials used by the mills.

BULK HANDLING FACILITIES:

Containers: The Berth 6–7 area serves as a multiple use facility, handling both break-bulk and containerized cargo. This complex includes a berthing facility 1,500 ft. long, incorporating a ro-ro dock at the extreme upstream end, an open storage and marshalling site capable of accommodating all sizes of containers, and 2 storage sheds with 120,000 sq. ft. of covered space. The dock and cargo handling area is a 120 ft. wide concrete surfaced area equipped with 3 rail tracks and a crane track.

In addition to the Berth 6–7 area, containers are being handled at Berths 1–2 where there is also considerable back-up storage area available for the storage of containers.

Grain: The Continental Grain Company operates the 5,165,000 bushel capacity grain elevator at the Port of Longview Terminal.

An overhead gallery equipped with 2 × 36 in. electric belt conveyors extends from the elevator to the grain berth and then for 255 ft. along the length of the wharf where it serves 5 vessel-loading spouts. Vessels can be loaded with grain through any 2 spouts at a combined rate of 29,000 bushels per hour.

Incoming waterborne grain is unloaded from barges moored alongside the rear of the wharf by a bucket-type marine leg at a rate of 12,500 bushels per hour. The marine leg feeds grain onto a conveyor system located beneath the dock which then carries back into the elevator.

The elevator has a rail car tipper for unloading grain from box cars at a rate of 9 cars per hour; facilities for emptying hopper-type rail cars; a hydraulic truck dumper; a portable-type marine leg for unloading grain from vessels to trucks at a rate of 5,000 bushels per hour; and a spout for loading rail cars.

Other equipment includes a fumigation system, washer, separators, scourer, dryer and scales.

Ore: A facility for unloading aluminium ore is located at Berth 5. The discharge equipment consists of 2 travelling hoppers with boom conveyors which extend over the face of the wharf to the side of self-unloading vessels. The hoppers feed ore onto a 60 in. electric belt conveyor located along the rear of the wharf. This conveyor feeds onto another conveyor which travels from the berth to 2 storage tanks which have a total capacity of 25,000 tons. A metering system located at the storage tanks fills hopper-type rail cars for outbound movement of the ore.

Roll-on/Roll-off: A 240 ft. extension to the upstream end of Berth 7 to accommodate Roll-on/roll-off vessels is now available at the Port of Longview. 96 ft. of the extension are constructed at a level 8 ft. lower than the remainder of the dock and will serve as the loading/unloading area to accommodate a ro/ro vessel's stern ramp. This section will have a width of 50 ft. from the wharf face to the access ramp leading to the upper level of the dock. The entire extension is constructed of concrete and steel on timber piling.

CRANES: 2 electric-powered gantry cranes serve Berths 1 and 2 on 550 ft. of track. They are readily adaptable for handling various types of bulk cargoes, containers, logs, machinery and large equipment. 1 crane is equipped with a 130 ft. boom and has a capacity of 60 tons at a 45 ft. radius. The other crane has a 120 ft. boom with a 50 ton capacity at a 45 ft. radius. Both cranes are served by two 400 ft. railroad tracks permitting direct handling between rail cars and vessels.

A third gantry crane serves Berths 6–7 on 1,050 ft. of track. This crane has a 165 ft. boom with a capacity of 50 tons at a 45 ft. radius. 2 × 1,000 ft. rail tracks are located between the crane tracks for handling rail cars at shipside.

The 600 ton capacity 'Columbia Giant', a fixed twin-boom derrick is located at Berth 3.

STEVEDORES: At least 24 hours notice necessary to arrange gangs before ETA. Arrange through port Office via Ship's Agent.

MEDICAL: Hospital facilities available.

TANKERS: Petroleum discharge lines consist of 1 × 12-in. and 3 × 8-in. pipelines. 1 tanker berth available.

DENSITY: Columbia River is fresh water at Longview.

FRESH WATER: Available through 8-in. line with 2.5 in. connections. Rate of delivery approx. 14.5 t.p.h.

FUEL: Bunker C fuel available through 12-in. line at 850 b.p.h., and light diesel fuel through 8-in. line at 1,200 b.p.h.

GANGWAY/DECK WATCHMEN: Not needed, but arrangements can be made if necessary.

OPENING/CLOSING HATCHES: Work carried out normally by stevedores.

CUSTOMS ALLOWANCE: See "Portland Oregon".

IDENTIFICATION CARDS: Advisable but not necessary.

CONSULS: At Portland, Oregon.

REPAIRS: Some deck and minor engine repairs are possible at Longview.

REPATRIATION: No facilities for effecting crew changes or repatriations.

AIRPORT: Nearest airport served by regular airlines is in Portland. Charter flights may be arranged from a small local airport.

TIME: GMT minus 8 hours. In addition, clocks are moved ahead 1 hour on the last Sunday in April and returned back 1 hour on the last Sunday in October, at 0200 hrs. local time on those 2 days.

HOLIDAYS: New Year's Day (Jan. 1st); Washington's Birthday (Feb. 22nd); Memorial Day (May 30th); Independence Day (July 4th); Labour Day (first Monday in September); Veteran's Day (Nov. 11th); Thanksgiving Day (fourth Thursday in November); Christmas Day (Dec. 25th). Cargo work can be arranged on most of these holidays.

POLICE/FIRE/AMBULANCE: Police 911; Fire 911; Ambulance 636-3120.

TELEPHONES: Available at dockside.

SHORE LEAVE: Crews allowed ashore if papers are in order.

AUTHORITY: Port of Longview.

AGENT: See "Portland, Oregon".

LOS ANGELES, California: 33.43 N. 118.17 W.

(See Plan Book)

PORT LIMITS: The seaward boundary of the port of Los Angeles is, for most purposes, the breakwater through which arriving vessels pass at Angeles Gate Light.

DOCUMENTS: First Port of Arrival.

1 Complete Manifest deposited with customs, original and traveller.
1 Complete Manifest returned to vessel.
1 Manifest of first port cargo deposited with customs broker.
2 Quarantine Declarations (Form PHS 43).
2 Agriculture Declarations (Form AIQ 43).
1 Visaed Crew List (Form I-418) 5 additional copies.
1 Crewman's Landing Permit (Form 1-95A) for each crew member and (Form I-94) for each passenger.
1 Dangerous Cargo Manifest deposited with Captain of the port. 1 copy in hands of Chief Officer for review by the Fire Department.

The Coast Guard Captain of the Port must be informed of vessel's ETA 24 hours prior to vessel's arrival.

Second and each subsequent Port of call in U.S.

2 Manifests of Cargo for second U.S. port left with customs.
1 Travelling Manifest returned to Master.

(*Note:* Travelling Manifest is carried and deposited with customs at final port of discharge in U.S. – in addition to above required documents 4 additional copies should be available.)

PILOTAGE: Request made through Agent. Contact can be made through VHF Channels 14 (156.7 mHz) or 16 (156.8 mHz). Not less than 1 hour notice of arrival or departure. 1 long and 1 short blast on ship's whistle or siren, or international signal. Pilot will board in vicinity of sea-buoy (LA entrance buoy, lighted bell buoy "L.A." black and white vertical stripes. Radar reflector).

ANCHORAGES: Anchorages defined on charts. No permit required to anchor less than 10 days. Permit for over 10 days obtained from Captain of the Port, USCG and Harbour Department Port Warden. Permit is required for Explosive anchorage.

MAX. SIZE: Restrictions on draft only. Main channel and inner harbour 35 ft. Super tanker terminal in outer harbour has fairway of 51 ft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Los Angeles Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: International Telephone and Telegraph, call letters "KOK" Los Angeles radio.

RADAR/VHF: The Los Angeles Harbour Pilot's station equipped with radar for use of Pilot. The Pilots also monitor VHF Channels 14 (156.7 mHz) and 16 (156.8 mHz).

TUGS: On stand-by 24 hours a day. However, should be ordered prior arrival. Tugs join vessel in main channel, tug lines used, except when towing astern.

BERTHING: Generally arranged through Agent. Berthing under control of Port of Los Angeles' Chief Wharfinger. There are 32 general cargo berths with depth alongside 35 ft.

BRIDGES: Highway suspension bridge (Vincent Thomas) crosses main channel between berth 95 and berth 225; overhead clearance of 185 ft. in centre. 2 bridges on Cerritos channel separating Los

CONTAINER HANDLING FACILITIES:

Terminal name and location	*APL Marine Terminal berths 87-93 ABC*	*Los Angeles Container Terminal berth 131*	*Wilmington Container Terminal berths 130-131*	*Available Container Terminal berth 200 A*	*Matson Terminal berths 207-209*	*Overseas Terminal berths 228 D/E 230 A/B*	*Seaside Container Terminal berths 232C/235*
Operated by	American President Lines PO Box 1551 San Pedro, CA 90733 (213) 831-2311	Los Angeles Container Co. Inc. PO Box 271 San Pedro, CA 90733 (213) 835–4861	Crescent Wharf & Whse. Co. Berth 200–A PO Box 398 Wilmington, CA 90744 (213) 835–7111 for Seatrain Lines	Crescent Wharf & Whse. Co. Berth 200–A PO Box 398 Wilmington, CA 90744 (213) 835–7111	Matson Term. Inc., 1001 New Dock Street Terminal Isl. CA 90731 (213) 547–5531	Overseas Shipping Co. PO Box 3128 Terminal Isl. CA 90733 (213)832–3341	Evergreen Marine Corp of Calif. 400 Oceangate Ave. Long Beach, CA 90802 (213) 432–5904
Number of berths	B. 87–89 (1) B. 90–93 (3) 1 berth (798 ft.) used for containers and 3 berths for general break-bulk and Passenger vessels	B. 126–129 (3)	B. 130–131 (1)	B. 200A (1) This berth is not in use for containers at the present time	B. 207–209 (2) Used for both container and roll-on/roll-off cargo	B. 228 D/E (1) B. 229–230 (2) 2 berths used for containers and one berth used for both break-bulk cargo and containers	B. 233–235 (1) 1 berth (1,014 ft.) used for combination LASH/container vessels Berth 232 CDE (1,368 ft.) used for LASH barge operations
Length of berths	3,775 ft.	750 ft. (Quay length of 2,532 ft. for cont. vessels)	970 ft.	738 ft.	1,572 ft.	2,359 ft.	2,382 ft.
Elevation of wharf deck (nearest 0.5 ft.)	15 ft.	15 ft.	15 ft.	15.5 ft.	15.5 ft.	15 ft.	15 ft.
Depth of water (existing/proposed)	35/45 ft. MLLW	35/45 ft. MLLW	35/45 ft. MLLW	35/45 ft. MLLW	35/45 ft. MLLW	35/45 ft. MLLW	35/45 ft. MLLW
Number of container spaces (stacked one high)	1,485 (20 ft. equiv.)	1,800–2,000 (20 ft. equiv.)	1,420	N/A	2,600 (20 ft. equiv.)	926 (20 ft. equiv.)	1,021 (20 ft. equiv.)
Number of reefer outlets	90	130	0	198	193	20	0
Container crane:							
Number	1	1-twin lift	1	N/A	3	2	
Lifting capacity	40 long tons	40 long tons	40 long tons		37 tons, 2–25 tons	35, 40 long tons	
Outreach offshore	107 ft.	106.5 ft.	107 ft.		102 ft., 102 ft.	81 ft., 113 ft. 6 in.	
Outreach inshore	88 ft.	91 ft.	90 ft.	(2–25 long ton cranes moved to B. 207–209 in Dec., 1971)	73 ft., 74.5 ft.	20 ft., 61 ft.	
Wheel span	50 ft.	50 ft.	50 ft.		34 ft., 34 ft.	70 ft., 50 ft.	
Container capacity	30–20′hr.	96–20′hr.	30–20′hr.		56–20′hr., 40–20′hr.	30–20′hr., 40–20′hr.	
Built by	Star Iron	PACECO	PACECO		Star Iron PACECO	Houben Industries Star Iron	
Owner	Am. Pres. Line	Port of Los Angeles	Port of Los Angeles		Matson Term., Inc.	Overseas Ship. Co.	Port of Los Angeles
Date installed	1972	1968	1976		1973, 1971	1969, 1971	1976
Container handling equipment (add. handling equip. is available from stevedoring co. on an "as needed" basis)		(numerals in parenthesis indicate the number of containers that can be stacked vertically by type of equipment)					
Travel crane	—	5-Drott, 40 ton/cap. (3)	—	N/A	1–PACECO 25 ton/cap. (2)	2–PACECO, Drott 30 ton/cap. (3)	—
Straddle carrier	6-Star Karricons, 40 ton/cap. (3) 6–Ross, 25 ton/cap. (1)	—	—	—	10–Clark, 25 ton/cap. (2) 2–Taylor/Clark 25/30 ton/cap. (3)	Various types 20 ton/cap. (2)	Straddle carrier operation
Fork Lifts	8-Hyster, Clark 15–30 ton/cap. (1)	3-Hyster, 7 ton/cap. (3)	—	—	—	2–Rayco Wagner 35 ton/cap. (3)	—
Chassis	200–40 ft. 150–20 ft.	400–40 ft. 400–20 ft.	—	—	100–20 ft. 150–40 ft. 500–24 ft.	8–41 yd. chassis 8-yard trucks	—
Container freight station	200 ft.×1,008 ft. 201,600 sq. ft. for containers	335 ft.×70 ft. 24,500 sq. ft.	0	731×60 ft. 45,860 sq. ft.	776 ft.×80 ft. 62,080 sq. ft.	880 ft.×160 ft. 137,200 sq. ft. Main use is for break-bulk cargo	0
Railroad and truck service	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Angeles and Long Beach harbours, 1 a double leaf-bascule (Badger Avenue Bridge) the other is a lift bridge (Schuyler F. Heim), as these bridges are less than 50 ft. apart they will be treated as one, overhead clearance 155 ft. at centre of Heim bridge.

SPECIALISED CARGO-HANDLING: There are at least 7 terminals capable of handling the port's roll-on/roll-off traffic.

The bulk loading facility,especially designed to handle iron ore and iron ore pellets, also handles other commodities such as coal and other dry bulk materials. Wharf length 800 ft. Depth alongside 51 ft. Loading rates up to 3,000 t.p.h., and unloading 500 t.p.h. The grain and tallow terminals at berth 174 have 13 silos that hold 410,000 bushels. Vessels can be loaded at a rate of up to 400 t.p.h. Accommodating vessels up to 35 ft. draft, any length.

Other specialised facilities include the GATX Petro Chemical Terminal, designed especially to receive petro chemicals; the Hugo Neu Corporation installation, where old automobiles are reduced to scrap metal for export; Coos Head and Sun Lumber Terminals; Cargill and National Molasses Terminals; United Fruit Company's Banana Terminals; and the processing and shipping plant of the U.S. Boron Company.

STEVEDORES: Agents make necessary arrangements.

MEDICAL: Necessary to notify Agents of required medical attention: this can be done when final ETA is determined. Hospital facilities available (private).

Vaccinations/fever certificates, etc., shall conform with rules and models prescribed by the International Sanitary Regulations.

TANKERS: Load and discharge lines have 6-and 8-in. standard flanges (super-tanker terminal has 12-in. lines with standard flanges). If not so equipped ship must furnish its own "C" clamps. Recommend ship have reducers on board to handle 6-and 8-in. flanges. Residue discharge facilities available for limited quantities. All types and grades of petroleum available. 20 tanker berths available in inner harbour, 35-ft. draft at MLLW, 2 are available outer harbour 51 ft. draft at MLLW. Also see Long Beach "Tankers".

DENSITY: Average density 1026 (exception during or after heavy rain).

FRESH WATER: Availability unlimited, delivery universal, rate of delivery 100 t.p.h.

FUEL: Unlimited fuel, all grades at attractive rates. 48 hours advance notice generally required.

FIRE PRECAUTIONS: Whenever vessel bunkering, sufficient serviceable fire hose with suitable nozzles attached to reach all parts of vessel shall be connected to fire main on vessel and made ready for instant use at all times during bunkering operations. If no adequate water pressure available on board, connections shall be made to shore lines to obtain adequate pressure. All Tank Ships shall be moored bow seaward and have wire towing pendants rigged fore and aft readily available for emergency use, fire hoses shall be connected as above at all times while vessel in port.

International fire signals will be used in case of fire (5 prolonged blasts of ship's whistle or siren of 4 to 6 seconds duration).

DEVELOPMENTS: Depths at Los Angeles will be increased in the Inner Harbour from 35 ft. to 45 ft. by 1979, and from 50 ft. to 80 ft. in the Outer Harbour by 1980.

A new container wharf is to be constructed in the main Channel of the port on the site of berths No. 233–235. The new facility will serve conventional containerised cargo.

GANGWAY/DECK WATCHMEN: Gangway watch recommended. Tankships and vessels handling dangerous cargo required to have gangway and deck watch.

OPENING/CLOSING HATCHES: Automatic hatches may be opened and closed by crew, manual hatches opened and closed by stevedores.

CERTIFICATES: *Passenger Vessels:*

Safety Certificate, with 50 or more passengers must comply with 1966 amendment (fire safety amendment) to Solas 60.
Load-line Certificate.
Radio Certificate.
Radio Telephone Certificate, if aboard.

Cargo Vessels:

Safety Equipment Certificate.
Load-line Certificate.
Certificate of Inspection/home Certificate.
Trading Certificate.
Cargo Gear Certificate.
Radio Certificate, Radio Telephone Certificate, if aboard.

If carrying passengers from U.S. ports, vessels must have PAC (Persons in Addition to Crew) Certificate issued by USCG.

Tanker Vessels:

Same as cargo. Exception: if carrying exotic cargo, required to have cargo facilities plan, reviewed and approved by USCG, Washington, D.C. On vessel's first visit it will be inspected and receive a letter of compliance.

CUSTOMS ALLOWANCES: Tobacco, either 300 cigarettes, 50 cigars, or 3 lb. of smoking tobacco, for the personal use of crew member. Wine and/or Spirit, 1 quart for personal use of crew member.

CARGO GEAR: Gangway net attached between ship and dock; extending 5 ft. beyond turntable in one direction and 5 ft. beyond point of intersection of gangway and stringpiece in the other direction. Preventer guy must be rigged separately to head of boom from working guy. Exception if cast head of boom is capable of withstanding the stress of all the lines attached thereto. (This is a West-Coast requirement.)

IDENTIFICATION CARDS: 1 crewmans landing permit (Form I-95A) or immigration card (Form D-1).

CONSULS:

Argentina – Consul
Australia – Consul General
Austria – Consul General
Belgium – Consul General
Bolivia – Consul General
Botswana – Consul
Brazil – Consul General
Canada – Consul General
Chile – Consul
China – Consul General
Colombia – Consul General
Costa Rica – Consul General
Denmark – Consul General
Dominican Republic – Consul General
Ecuador – Consul General
El Salvador – Consul General
Estonia – Vice-Consul
Finland – Consul
France – Consul General
Germany – Consul General
Great Britain – Consul General
Guatemala – Consul General
Haiti – Consul
Honduras – Consul General
Israel – Consul General
Italy – Consul General
Ivory Coast – Consul General
Japan – Consul General
Jordan – Consul
Korea – Consul General
Latvia – Consul
Liberia – Consul
Lithuania – Consul General
Luxembourg – Consul
Lebanon – Consul General
Malawi – Consul
Malaysia – Consul
Malta – Vice-Consul
Mexico – Consul General
Monaco – Consul
Netherlands – Consul General
New Zealand – Consul General
Nicaragua – Consul General
Norway – Consul General
Panama – Consul General
Paraguay – Consul
Peru – Consul General
Philippines – Consul General
Portugal – Consul
Senegal – Consul
South Africa – Consul
Spain – Consul General
Sri Lanka – Consul
Sweden – Consul General
Switzerland – Consul General
Thailand – Consul General
Turkey – Consul General
Uruguay – Consul
Venezuela – Consul
Western Samoa – Consul

Commercial Representatives of foreign Governments:

Australia – Trade Commissioner
Austria – Trade Delegate
Belgium – Commercial Officer
Brazil – Trade Commissioner
Canada – Trade Commissioner
Denmark – Consul Attache
France – Commercial Counsellor
Finland – Trade Commissioner
Germany – Deputy Consul General
Great Britain – Commercial Consul
Hong Kong – Trade Development Council
Israel – Consul
Italy – Trade Commissioner
Japan – Consul
Korea – Consul
Mexico – Commercial Attache
Netherland – Vice-Consul
Nicaragua – Commercial Attache
Philippines – Trade Representative
Portugal – Trade Office
Sweden – Trade Commissioner
Switzerland – Vice Consul
Yugoslavia – Trade Commissioner

REPAIRS: All types of deck and engine repairs possible.

DRY DOCKS: Largest dry dock 659 ft. by 97 ft., 22,000 displacement tons. 3 smaller dry docks (17,500, 15,000, 10,000 tons).

REPATRIATION: Arrangements can be made through immigration on request of Agent to have crewman change ship or return to home port.

AIRPORT: Approximately 20 miles to International Airport which serves all major airlines.

TIME: Standard Time, GMT minus 8 hours. Daylight saving time GMT minus 7 hours (April through October).

HOLIDAYS: Cargo may be worked on holidays with holiday pay scale. Exception: the first Thursday in July, at which time it is almost impossible to find working crews, although there are now exceptions to this practice.

POLICE/AMBULANCE/FIRE: The telephone numbers are all the same (area code 213) 831-9211, simply ask for Police, Ambulance or Fire. Fire Alarm boxes adjacent to all cargo sheds.

TELEPHONES: Connections for passenger vessels at passenger terminals only.

SERVICES: A ship-reporting service "The Marine Exchange" located at entrance to main channel, Los Angeles harbour. They monitor Channels 14 (156.7 mHz) and 16 (156.8 mHz) VHF and have Channel 9 (156.45 mHz) VHF as their own. Primary duties are reporting arrivals, departures and locations of vessels.

SHORE LEAVE: Crew members are allowed ashore.

REGULATIONS: Permits required for hot work (welding, cutting etc.). Permit required for any dangerous cargo. Permit to discharge ballast (clean water) required. Restrictions on bunkering operations (scuppers plugged, valves closed).

DELAYS: No delays in berthing, load or discharge or bunkering can be expected.

AUTHORITY: Port of Los Angeles.

AGENT: Cascade Shipping Co., Berth 219 Indies Terminal, P.O. Box 3404, Terminal Island, California 90731. Tel: 213-547-2445. Telex: TWX 910-345-6623. Cables: 'Caship'.

MAGPETCO, Texas: 30.02 N. 93.59 W.

DOCUMENTS, PILOTAGE, RADIO, etc.: Refer to "Port Arthur". Also see "Port Neches".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

METLAKATLA, Alaska: 55.08 N. 131.35 W.

Located on Annette Island. Open all year.

DOCUMENTS: See "Anchorage, Alaska".

PILOTAGE: Ships coming up from the Hecate Straits or outside of Graham Island proceed into Dixon Entrance to the vicinity of Point McCartey where the Pilot will meet them. Vessels coming up the inside passage from Vancouver, B.C. are met at Lucy Island Pilot Station.

ANCHORAGE: Good anchorage in gravel and mud.

MAX. SIZE: Depths in harbour 120 ft. Tides: diurnal range – 14.7 ft. Also see "Berthing".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

CUSTOMS: Quarantine, Immigration and Customs, from Ketchikan.

BERTHING: 2 berths: 1. City Dock: 400 ft. long and 60 ft. wide. More than 35 ft. deep. Due to shallow water at East end, a starboard landing is usually made. No covered storage, temporary open storage. 4 fork-lifts, 2 of 20,000 lb capacity.

2. Annette Island Canning Co.; 200 ft. long and 23 ft. deep. 15 ton crane and 2 fork-lifts. 1 25-ton fork lift.

TUGS: Available in Ketchikan.

STEVEDORES: 4 gangs available.

REPAIRS: Facilities at Ketchikan.

SUPPLIES: Bonded and unbonded stores from Ketchikan.

WATER: Available.

FUEL: Not available.

MEDICAL: Hospital available in Ketchikan; small clinic in Metlakatla.

AIRPORT: Small charter plane only. Jet to Juneau and Seattle from nearby Annette. (Water transportation to Ketchikan.)

MIAMI, Florida: 25.46 N. 80.10 W. (See Plan Book)

DOCUMENTS:

Customs: All foreign and "in bond" goods entering the Port/Country are subject to customs examination and duty. Manifest of foreign cargo inbound must be presented to the customs boarding officer prior to commencing discharge.

Ship's Agent must notify customs at least 1 hour prior to the ship's arrival. Regular working hours, Monday through Friday 0800–1700, telephone 350-5261. Outside normal working hours, telephone contact 526–2821; overtime is charged.

Forms required:

2 Master's Oath on Entry of Vessel in Foreign Trade	Form 1300
2 General Declaration	Form 1301
2 Ship's Store Declaration	Form 1303
2 Crews' Effects Declaration	Form 1304
Crew Members' Declaration (1 Declaration for each Crew member)	Form 5129
1 Application–Permit–Special License (Unloading, loading, overtime services)	Form 3171
2 Passenger Lists	I–418
2 Crew Lists	I–48
Customs Declaration (Passengers) (1 Declaration for each family)	6059–B
2 Declarations of foreign repair to vessels (U.S. flag vessels only)	3415

Immigration: An immigration inspector will meet all ships entering port. Valid travel documents/passport/visa/entry permit are required in some cases.

Ship's Agent must notify Immigration at least 1 hour prior to ship's arrival. Regular working hours, Monday through Friday 0800–1630, telephone 350–5739. Outside normal working hours, telephone contact 526–2626; overtime is charged.

Forms required:

Crewmen's Landing Permit	Form I–95
Alien Passengers' Landing Permit	Form I–94
Passenger List	I–418
Crew List	I–418

PILOTAGE: All foreign vessels are required to take a Pilot who boards near the outer sea buoy, 2.5 miles offshore.

Request Pilot through Biscayne Bay Pilots Association, 24 hours in advance, call sign KGW 303, VHF Channel 16, direct from ship or through vessel's steamship Agent accompanied by particulars of draft and berthing assignment. Ship to confirm on VHF Channel 16 one hour prior to arrival. Channel 16 is monitored 24 hours and station can monitor VHF Channels 10, 12 and 14. Ship may cable Pilot station direct through RCA radio Lantana, Florida, call sign, MIAMI PILOTS. Estimated time of departure should be made when ship docks and must be confirmed by phone (672–7643 or 672–7644) 1 hour prior to the Pilot boarding.

ANCHORAGE: The prescribed anchorage area for vessels anchoring outside the harbour is located Eastward of a line about 1.5 nautical miles offshore and Northward of a line about 0.2 miles nautical miles North of the sea buoy at the entrance to the ship channel. The entire anchorage area lies North of the entrance channel to Miami. The Northern and Southern extremities of this area are marked by spar buoys. Vessels desiring to anchor off the entrance to the Harbour of Miami are required to do so within this area, to avoid possible damage to cables laid on the ocean bottom in the vicinity. Refer to anchorage area 202.188 on United States Department of Commerce, National Oceanic and Atmospheric Administration (NOAA), National Ocean Survey, Chart No. 11468.

RESTRICTIONS: The entrance to the main channel is directly East of the City of Miami, approximately 4.5 miles. The sea buoy marking the channel entrance through the reef is about 2 miles offshore. The entrance is an artificial cut 305 m. wide, known as Government Cut, dredged across the Southern end of Miami Beach. It is protected by jetties and is well marked. A channel has been dredged to a control depth of 11.3 m., and 135 m. wide on the sea end and 135 m. wide through the Cut to Biscayne Bay. The channel, 122 m. wide with an 11-m. control depth continues Westward across Biscayne Bay to the Miami Harbour Turning Basin. For the full length of the Port of Miami on the North (channel) side of the Dodge Island site, there is additional channel improvement 135 m. wide and 11 m. deep, forming a berthsite turning basin immediately North of the Port and extending to the MacArthur Causeway 2,040 m. in length and 274 m. in width.

MAX. SIZE: Recommended draft restriction of 33 ft. at MLW. Size restricted by size of turning basin which has 36 ft. at MLW, is 1,700 ft. North and South; 1,650 ft. East and West. No limit to length at new port which has 6,700 ft. at 36 ft. MLW and 4,000 ft. at 25 ft. at MLW. A 1,000 ft. ship can be handled in turning basin if draft under 33 ft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Miami Quarantine Station.

Ship's agent must request quick clearance, "pratique", from United States Public Health Department.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

An Agriculture inspector will board all foreign, coastwise and domestic ships on arrival.

Ship's Agent must notify Agriculture at least 1 hour prior to ship's arrival. Regular working hours, Monday through Friday 0800–1630, telephone contact 350–4758. Outside normal working hours, telephone contact 526–2821; overtime is charged.

Forms required:
1 Copy of Cargo Manifest.
1 Report of Ship's Stores and Port of Origin.

Forms provided by and filled out by the inspector:
Cargo Form 210
Boarding Report 288

RADIO: The Coastguard and Pilot station can be raised on VHF Channel 16. Telephone contact to Agents, receivers, etc., can be made via Miami Marine Operator.

TUGS: Large tugs up to 2,000 h.p. available 24 hours per day. Request tug service via Pilot station. Big tugs privately owned by Belcher Towing Company who work closely with Pilots. Smaller tugs available on Miami River and operated by Backus Towing Inc.

BERTHING: Berths are all marginal berths, no piers, 2,040 lineal m. of berthing at 11 m. depth, also 1,200 lineal m. at 7.6 m. depth. Dock aprons are 21 m. wide. Large ships can turn at berthsite in the 270-m. wide approach channel or may continue into the turning basin, 500 m. by 518 m. There are 10 berths for bow-load and stern-load trailer ships.

Gear and Heavy Lift Equipment: 20 shipside cranes all truck-mounted, rubber-tyred with outriggers, capacity 40 to 90 tons; 4 to 140 tons; 1 on-call, to 300 tons. 5 container movers "port packer" to 40 tons. 100 forklifts, some 5 to 8 tons capacity; some at 9 and 10 tons capacity; some 30 and 40 tons capacity.

Cruise Ship Piers: Marginal berthing for 8 cruise ships each with modern air-conditioned passenger lounge and custom inspection areas.

Container Handling: On and off ship by 20 mobile cranes. Lateral movement on Port by "port packers".

Cold Storage Cargo: Not on port but ample on the mainland by commercial companies.

Commercial Warehouses: Ample on the mainland. On Port, 82,000 square m. in 7 modern transit cargo buildings.

STEVEDORES: All receiving, recording, moving, loading and discharge of cargo is performed by the stevedoring companies. They employ longshoremen members of the International Longshoremen's Association (I.L.A.). Normal working hours 0800–1700. Overtime is charged for Saturdays, Sundays, and holidays. Port open 24 hours per day.

BRIDGES: There are no bridges between the open sea and the port. To enter Miami River requires passage through a highway and railroad bridge. This bridge manned 24 hours per day. Only smaller ships enter Miami River which is dredged to 15 ft. at high water and is 150 ft. wide for a distance of 3 miles above entrance. A bridge about half a mile from entrance is closed from 0700 to 0900 hrs. and 1600 to 1800 hrs.

MEDICAL: Clinic available.

TANKERS: No slop (residue) discharge facilities. One tanker berth (1,000 ft.) available. Max. draft 30 ft. at MLW. No special fittings required.

FRESH WATER: Available every 220 ft. at new port on Dodge Island. Delivered via hose.

FUEL: All grades; bunker, intermediate and marine gas oil, Diesel, bunker C. Ships fuelled at dockside from Belcher Oil Co. barges.

FIRE PRECAUTIONS: Usual safety precautions on smoking, flying baker, mooring pendant available, ample persons aboard to fight fires, fire hose led out, etc.

GANGWAY/DECK WATCHMEN: Usual shipboard watches to tend lines. Special guards (security) through Wackenhut, Burns Security, etc.

OPENING/CLOSING HATCHES: Work normally done by longshoremen.

CUSTOMS ALLOWANCES: See "Jacksonville".

IDENTIFICATION CARDS: Definitely needed in order to return to ship at night. A security guard at new port will check.

CONSULS:

Argentina	Tel. 373–7794	Haiti	Tel. 377–3547
Austria	,, 373–5511	Honduras	,, 358–3477
Belgium	,, 932–4263	Italy	,, 371–5393
Bahamas	,, 373–6295	Jamaica	,, 374–8431
Bolivia	,, 358–3450	Japan	,, 667–4633
Brazil	,, 377–1734	Mexico	,, 371–5444
Chile	,, 373–8623	Netherlands	,, 358–5621
Colombia	,, 373–3087	Nicaragua	,, 373–6996
Costa Rica	,, 377–4242	Norway	,, 358–4386
Denmark	,, 446–5911	Panama	,, 379–7280
Dom. Rep.	,, 373–4862	Paraguay	,, 672–1921
Ecuador	,, 371–8366	Peru	,, 373–5061
El Salvador	,, 371–8850	Spain	,, 661–5001
France	,, 374–2626	Sweden	,, 751–1851
Germany	,, 573–0878	Thailand	,, 373–7571
Guatemala	377–3201	Venezuela	,, 373–4311

REPAIRS: All deck and engine dockside repairs available.

DRY DOCKS: 2 small drydocks, max. size 600 tons.

SURVEYORS: Several, including Lloyds.

AIRPORT: 8 miles or 15 minutes from airport by expressway. Serviced by 24 foreign and 10 United States scheduled air carriers.

TIME: Eastern Standard Time, GMT minus 4 hours. Daylight Saving Time in effect from last Sunday in April to last Sunday in October and adds 1 hour to Eastern Standard Time.

HOLIDAYS: Official holidays are New Year's Day (January 1st); Washington's Birthday (3rd Monday in February); Memorial Day (May 30th); Independence Day (July 4th); Labor Day (first Monday in September); Columbus Day (October 12th); Veterans Day (4th Monday in October); Thanksgiving Day (last Thursday in November); Christmas (December 25th). Cargo can be worked on holidays by advance arrangement and payment of double time.

POLICE/AMBULANCE/FIRE: Police Department, tel. 377-7011; Fire Department 377-6231 (Rescue Squad 377-6231).

TELEPHONES: Telephone available by order to telephone company.

SERVICES: All types of special services such as tank cleaning, compass adjusting, admeasurement, radar/radio repairs, rathometer repairs, etc., available.

SHORE LEAVE: Crew members are allowed ashore after clearance by customs, immigration and quarantine.

AUTHORITY: Port of Miami.

MILWAUKEE, Wisconsin: 43.01 N. 87.53 W.

(See Plan Book)

PORT LIMITS: The Port of Milwaukee limits are generally considered to be the harbour breakwall housing the harbour entrance lighthouse. However, unless specifically declared to the contrary in the covering charter party, a vessel will be considered an "arrived ship" upon anchoring outside the harbour breakwall, in the event that a proper berth and/or anchoring space inside the harbour breakwall is not available.

DOCUMENTS:

Vessels from Canadian ports
Dominion clearance and Public Health Pratique (both issued at Montreal).

Vessels from all other nations
Inward Foreign Manifest(s)
Stores Lists, over Master's oath.
Curio Lists, over Master's oath.
Permit to Lade and Unlade.
Discharge Manifest.
Inspection by U.S. Dept. of Immigration (Crew List).

Inspection by U.S. Dept of Agriculture.
Receipt of Entrance fee.
Receipt of Tonnage Tax.

Additional documents may be required, dependent on commodity involved in the carriage, point of origin, flag or any unusual circumstances existing.

PILOTAGE: Pilot boards at Montreal and at several other stations along St. Lawrence Seaway route.

ANCHORAGES: The chart does delineate anchorage area for large vessels and shows the 28 ft. depth just East of South Piers 1,2, and Liquid Cargo Pier. This deep area, about 2,400 ft. × 5,400 ft., used by large vessels for anchorage.

MAX. SIZE: 739 ft. × 75 ft. with 26 ft. draft. No tidal effect, although lake levels vary seasonally. Minimum depth above low water level 27 ft.

HEALTH: See "Health: All Ports" before first U.S. port (Albany). Illness reports made to Chicago Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Radio station at City Heavy Lift Dock. Harbour Master and Dock Superintendent can be reached at this facility Monday through Friday between 0800 and 1630 hrs; 156.8, 156.6 and 156.5 megacycles.

TUGS: Normally pick up vessel inside breakwater. Tugs optional at discretion of ship's Master. Fee for use of tug's lines.

BERTHING: The time of passing harbour entrance lighthouse establishes order of berthing, provided vessel is ready to work.

BRIDGES: Bridges closed between 0730 and 0830 hrs.and 1630 and 1730 hrs. except on Sundays and 8 legal holidays. In addition, 2 hours' notice required for opening bridges across Milwaukee River North of and including Buffalo Street.

SPECIALISED CARGO HANDLING FACILITIES: In addition to the 3 general cargo terminals of approx. 340,000 sq. ft. covered area (9 berths), and dry bulk terminal of 60,000 sq. ft. covered area (2 berths), the port is served by a refrigerated warehouse of 10,000 sq. ft.; 1 open dock area (2 berths) for handling bulk commodities such as pig iron; 1 open dock (3 berths) for heavy lifts and equipped with a 200-ton stiff leg crane and 2 gantry cranes of 70 and 50 tons; 1 liquid cargo pier for edible and inedible fats, greases and tallow; 2 grain elevators of 3.5 million and 2.5 million bushel capacity and 2 scrap iron loading facilities. The port is also equipped with a mobile heavy crane lift/container crane capable of serving all berths.

STEVEDORES: Vessel should provide a stowage plan, manifest of inbound cargo and exceptions list (unusual vessel or cargo characteristics affecting facilitation of cargoes). Vessel should comply with the U.S. Dept. of Labor's safety regulations.

MEDICAL: Advance notice desirable. Hospitalisation available.

TANKERS: Diameter of load lines and discharge lines 8 in. and 10 in. No slop residue facilities. 4 berths available, with draft to seaway depth.

FRESH WATER: Potable water available at most berthing areas.

FUEL: All grades of fuel oil available by truck delivery at shipside.

GANGWAY/DECK WATCHMEN: Not necessary.

OPENING/CLOSING HATCHES: At the option of ship, if terminal stevedores perform operation, it is based on cost plus 20%.

CERTIFICATES:
Registry of Ship.
Master's Licence.
1st, 2nd and 3rd Officer's Licences.
Radio Licence.
Wireless Operator's Licence.
Ratification Certificate (done each year).

(Additional certificates may be required, dependent upon Registry, cargo, trade route engaged in, nationality of crew, etc.).

CUSTOMS ALLOWANCES: Tobacco, 10 packages or 200 cigarettes in possession at any time. Wine and/or Spirits, 1 bottle per officer.

IDENTIFICATION CARDS: U.S. Immigration rules.

CONSULS: The following countries are represented:
Costa Rica
Ecuador
Nicaragua
Norway
Sweden

REPAIRS: Limited to above water line, and boiler repairs.

REPATRIATION: Local Agents effect repatriation.

AIRPORT: 5 miles distant.

TIME: U.S.A. Central Time. Central Daylight Time from late April to late October—5 hours behind GMT. Central Standard Time from late October to late April—6 hours behind GMT.

HOLIDAYS: Easter Sunday; May 30th (if on a Saturday, previous day is a holiday); July 4th (if on a Sunday, Monday is a holiday); First Monday in September; Fourth Thursday in November and following day; Christmas Day; New Year's Day. Cargo can be worked on these days at holiday pay.

POLICE/AMBULANCE/FIRE: Police — non-emergencies 273-8660; Emergency, including emergency ambulance service 765-2323; Fire, including rescue squad service 347-2323.

TELEPHONES: Can be arranged, but unnecessary because sufficient phones available in dockside offices.

GENERAL: Chandlery services for foodstuffs, ship complements and laundry services available. Garbage and waste disposal are available through private operators, chandler usually making the arrangements.

The Liquid Cargo Pier is also available for non-petroleum liquid cargoes.

SHORE LEAVE: Crew allowed ashore.

DELAYS: Little or no delay.

DEVELOPMENTS: A container terminal is contemplated for the future.

AUTHORITY: Board of Harbor Commissioners, City of Milwaukee.

MOBILE, Alabama: 30.40 N. 88.02 W. (See Plan Book)

DOCUMENTS:
3 copies Cargo Manifest (Forms 7527-A or 7527-B), the original showing all cargo on board, and 2 copies showing only cargo for this port.
2 copies Crew Manifest (curio list).
2 copies Stores List.
2 copies Passenger List (Form I.418).
2 copies Crew List (Form I.418).

Customs boarding Officer will also examine Ship's Register and Load-line Certificate. In addition, the following documents will be required for formal entry to be made within 48 hours of arrival from abroad, or 24 hours from arrival from a United States port:
Health Pratique.
Master's Oath (Customs Form 3255).
All foreign clearances.
U.S. Certificates of payment of tonnage tax (Customs Form 1002).
Certified Crew List.

PILOTAGE: Pilotage is compulsory.

ANCHORAGE: If berth is congested, vessel may anchor at the bar (35 miles from harbour).

RESTRICTIONS: Controlling depth: 40 ft. for entrance, channel and anchorages. Mean tidal range 1.5 ft. Nature of bottom: soft mud. Vessel can dock and sail at any hour at any stage of the tide.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: There are 7 tugs available 24 hours with max. horsepower of 1,800.

BERTHING: There are 34 berths at most of which, direct loading or unloading can be effected from quayside tracks.

Public Grain Elevator: Depth alongside 42 ft. 2 berths, each with 5 loading spouts. Unloading rate for grain 40,000 bushels/hour at each berth. Loading rate 115,00 bushels/hour for grain and 1,000 t.p.h. for meal.

McDuffie Terminals: Bulk coal handling plant, depth alongside the berth is 40 ft. Shiploader can load over 4,000 t.p.h. The stacker/reclaimer can handle 4,000 t.p.h., a rail car tipple rated at 4,000 t.p.h. and a barge unloader that works 3,500 t.p.h. A conveyor belt system connects the entire complex.

Bulk Handling Plant: 3 berths, depth alongside 40 ft. Total quay length 1,600 ft. 4 unloading towers which can unload 2,200 t.p.h. and 2 loading conveyors, rate 2,000 t.p.h.

Depth alongside other public berths as follows:

Pier 2	38 ft. MLW	Pier River End B	38 ft. MLW
Pier 3	38 ft. MLW	North Pier B 1	40 ft. MLW
Pier 4	38 ft. MLW	Pier North B 2	40 ft. MLW
Pier 5	38 ft. MLW	Pier North B 3	40 ft. MLW
Pier 6	38 ft. MLW	Pier South C1	41 ft. MLW
Pier 7	38 ft. MLW	Pier South C 2	41 ft. MLW
Pier 8	38 ft. MLW	Pier South C 3	41 ft. MLW
Pier South A	37 ft. MLW	Pier River End C	38 ft. MLW
Pier River End A	30 ft. MLW	Pier North C 1	39 ft. MLW
Pier North A 1	38 ft. MLW	Pier North C 2	37 ft. MLW
Pier North A 2	38 ft. MLW	Pier D Cold Storage	37 ft. MLW
Pier North A 33	38 ft. MLW	Berth 1 tipple	Under repairs
Pier South B 1	41 ft. MLW		
Pier South B 2	41 ft. MLW	Berth 2 tipple	44 ft. MLW
Pier South B 3	41 ft. MLW	Berth 3 tipple	40 ft. MLW

CRANES: 75 ton stationary crane, 50 ton mobile crane, 80 ton floating crane and 45 ton container crane available.

TANKERS: Max. length 950 ft. restricted by turning basin. American Bituminals & Asphalt Co. – Jetty berth dredged to 38 ft.

Magazine Point: Hess Terminal: Jetty berth dredged to 43 ft.

FRESH WATER: Available ex wharf at all berths.

FUEL: Most grades fuel/diesel available via pipe-line, barge or truck.

STEVEDORES: Normal working hours for the port are 0800/1700 hrs. Monday through Friday.

REPAIRS: *Alabama Dry Dock & Shipbuilding Company* – Dry Docks ranging from 5,000 to 18,000 tons displacement all serviced by 51-ton gantries. Dock length range from 380 ft. to 620 ft. Also available is a 70-ton floating crane. Any type of repair can be effected.

Bender Ship Repair. 1 dry dock of 2,500 tons displacement. Majority of repair work is top-side. 100-ton floating crane available.

DENSITY: 1,000 (Fresh Water).

DEVELOPMENTS: A 15 million dollar expansion programme, improving the present bulk materials handling plant, construction of the container facility, widening the turning basin and various updating projects.

CUSTOMS ALLOWANCES: At the discretion of customs officers. Normal allowance is 200 cigarettes or 2 lb. tobacco and 1 quart wine or spirits per man. Additional allowances may be given if considered necessary, due to length of vessel's stay in port.

IDENTIFICATION CARDS: Standard U.S. Immigration Forms I.95 to be made up for each crew member on arrival. Not necessary for crew man already holding Form I.95, issued for the same vessel.

HOLIDAYS: Absolutely no work is performed on New Year's Day, Easter, July 4th, Labour Day and Christmas Day. Working holidays are Mardi Gras Day, Veteran's Day and Thanksgiving Day.

AUTHORITY: Port of Mobile, Alabama State Docks Dept.

MOREHEAD CITY, N. Carolina: 34.43 N. 76.42 W. (See Plan Book)

DOCUMENTS:

3 copies Cargo Manifest (Form 7527-A or 7527-B), the original showing all cargo on board, and 2 copies showing only cargo for this port.
2 copies Crew Manifest (curio list).
2 copies Passenger List (Form 1418).
2 copies Crew List (Form 1418).

Customs Boarding Officer will also examine Ship's Register and Load-line Certificate. In addition, the following documents will be required for formal entry to be made within 48 hours of arrival from abroad, or 24 hours from arrival from a United States port:

Health Pratique.
Master's Oath (Customs Form 3255).
All Foreign Clearances.
U.S. Certificates of Payment of Tonnage Tax (Customs Form 1022).
Certified Crew List.

PILOTAGE: Pilots obtained from Morehead City Pilots' Association, Morehead City, North Carolina 28557. Tel. 726-6134.

The Port Terminal at Morehead City is 3.5 miles from the sea buoy. The port is located on the Intracoastal Waterway and is situated 75 miles S.W. of Cape Hatteras and 14 miles W. of Cape Lookout.

Pilots should be given 24 hours notice and then contacted by VHF Channel 16 about 2 hours before arrival at sea buoy R "2BI".

Pilot boat is about 40 ft. long, with white hull and superstructure; the hull is marked with "PILOT" in black letters on both sides.

RESTRICTIONS: The channel and basin at Morehead City are maintained at a controlled depth of 40 ft. – mean low water.

The wharf is constructed of concrete and steel and has marginal tracks and crossovers for full length. Truck ramps are located at various points for easy roll-on/roll-off access.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Fort Monroe Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: Available. Service provided by Carteret Towing Co. Inc., Radio Island, Morehead City, North Carolina 28557. Tel. 919-726-5440.

BERTHING: The wharf is 5,300 ft. long. This length enables the port to provide berths for 10 × 500 ft. general cargo ships and 1 petroleum tanker at any given time.

Adjacent to the general cargo dock area is a 1,000 ft. deep water berth for out-loading through the bulk handling facility.

Morehead City also provides a barge terminal with 1,200 ft. of modern berths. This terminal was developed as a part of the bulk handling facilities, but is also used for the loading or off-loading of a variety of cargoes.

The bulk handling facilities of the port terminal at Morehead City are designed to out-load bulk and aggregate cargoes at a rate of 3,000 t.p.h.

The out-loader is served by a 1,200 ft. gallery which feeds from a 106,000 ton storage warehouse, and in turn is fed by a portable conveyor system from the barge terminal. The entire system is automated.

Wharf: 5,300 ft. of continuous concrete wharf. 1,000 ft. deep-water berth for bulk-handling facility. Additional 2,000 ft. projected.

Barge Terminal: 1,200 ft. of dock space providing 4 × 300 ft. berths.

Bulk Handling Facilities: 3,000,000 ton annual capacity bulk facility for receipt, conveyance, storage and shipment of bulk cargoes. Loading capacity 3,000 t.p.h., storage capacity 106,000 tons.

CRANES: 2×115-ton capacity gantry cranes one 40-ton full bridge container crane.

FUEL: Available from Blue Ridge Fuel Company, Esso Oil Company, and Texaco Inc.

CONSULS: Finnish Vice-Consul, Wilmington, N. Carolina 28401. Tel, 763-5451.

Royal Norwegian Consulate, Wilmington, North Carolina 28401. Tel. 763-8271

IDENTIFICATION CARDS: Standard U.S. Immigration Forms 195 to be made up for each crew member on arrival. Not necessary for crew man already holding Form 195, issued for the same vessel.

SERVICES: There are no shipyards in the port. Service on any kind of electronic equipment is not available.

REPATRIATION: This is possible but should be avoided as there is no Immigration Office. Closest airport is about 1 hour's drive from the town.

TIME: Eastern Standard Time, GMT minus 5 hours. Daylight Saving Time, GMT minus 4 hours from April to October.

AUTHORITY: North Carolina State Ports Authority.

MYRTLE GROVE, Louisiana: 29.38 N. 89.57 W.

West Bank of Mississippi River, about 62 miles from sea.

DOCUMENTS/PILOTAGE: For all general information refer to "New Orleans".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: 2 tugs required for vessels under 25,000 d.w.t. 3 tugs for vessels over 25,000 d.w.t.

BERTHING: Mississippi River Grain Elevator Co. berths: distance between buoys 900 ft., alongside 400 ft. dock, depth 40 ft. Loading rates, 80,000 to 120,000 bushels per hour.

FRESH WATER: Not available.

FUEL: Not available.

DENSITY: Fresh Water (1000).

NAWILIWILI, Hawaii (including Port Allen): 21.57 N. 159.21 W. (See Plan Book)

DOCUMENTS:

4 Crew Lists.
4 Passenger Lists.
Customs Documents.
Clearance, Travelling Manifest.
Local Manifests.
Health Documents.
Bill of Health and Vaccination Certificates.
4 Manifests.
4 Bills of Lading.
Ship's Papers.
Certificate of Registration or Enrolment.
Annual Inspection Certificate.
Load-line Certificate.
Derat Certificate.
Drinking Water Certificate.
Radio Certificate and Licence.
4 Store Lists.

PILOTAGE: Vessel's Agent orders Pilot 48 hours in advance by telephone, correcting ETA as necessary with 4 hours final notice if a last-minute change occurs. Tug-boat *"Lihue III"* serves as Pilot boat for Nawiliwili and Port Allen, 64 ft. long, hull black, house white, topsides orange. Radio telephone and VHF communication within 1 hour of arrival and while tug is working. 2638 and 2738 kc/s. and Channels 6, 12 and 16 on VHF. Pilot boards 1 mile East of Nawiliwili and 0.5 miles South of Port Allen. Signals in accordance with International Code.

ANCHORAGES: Nawiliwili: between Nawiliwili Light and Carters Point in 5–9 fathoms. Not good in strong trade-wind weather. Fair holding ground. Not recommended.

Port Allen: 0.5 mile South of Port Allen breakwater light in 5–10 fathoms. Fair holding ground. Untenable in Kona or S.W. storms which occur from November to March.

RESTRICTIONS: 24 hours notice of arrival is obligatory. Nawiliwili; no entry at night. From October 21 to March 21 Pilot boards at 0630 hrs. Balance of year 0600 hrs. Port Allen: no time restrictions.

MAX. SIZE: Nawiliwili: Length 650 ft., beam 90 ft., draft 32 ft. 6 in.

Port Allen: Length 650 ft., beam 90 ft., draft 32 ft. on North side and 28 ft. on South side. Pier is 600 ft. long, so larger vessels overhang.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Honolulu Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Communicate through RCA or ITT stations in Honolulu. Also KQM marine operator for radio telephone and telephone to Kauai.

TUGS: One 1,100 horsepower tug meets vessels off port and in outer harbour. Both ship's lines and/or tug's line may be used. No charge for tug's line. Tug has bow fender and is used for pushing. Has radio telephone, WP 4371 and VHF with Channel 12 usually used. Extra tugs available from Honolulu.

BERTHING: Limited to 2 large vessels at Nawiliwili and 2 at Port Allen. Considerable barge traffic. Prior reservations by Agent necessary with District Manager. Berth conflicts usually solved in Honolulu by rerouting of Island ports.

New Ro/Ro barge facility at Pier 1.

CARGO HANDLING FACILITIES: Nawiliwili has 2 sugar loading gantries on Pier 2; no equipment or storage to handle grain, ore, coal, sulphur. Fertiliser is discharged by self-unloading barge, and the bulk hauled away via truck. There is a container yard but no facilities to off-load containers. Weekly service is by a self-unloader. Roll-on/roll-off cargo is moved on ramps furnished by barges. LPG and petroleum product lines are privately owned.

STEVEDORES: All stevedoring by McCabe Hamilton and Renny Co. Ltd., with headquarters in Honolulu and branches in outports. 48 hours notice by Agent for labour and equipment. Inward cargo is containers, general, bulk fertiliser, petroleum products, and building and construction materials. Outward is raw sugar, canned pineapple, general and molasses. Foreign vessels are subject to heavy fines for carrying stevedore gear inter-island without Customs clearance.

MEDICAL: 2 hospitals on Kauai with 2 doctors under contract to United States Public Health Service. Standard international inoculations and vaccination required. Advance notice by Agent desirable but not necessary.

TANKERS: All piers have pipe-line connections for incoming cargo and outgoing molasses. Fuel oil 10 in., molasses 10 in., water line 6 in., gasoline, kerosene and diesel 8 in. These are the main lines under the wharves. Hose connections to ships vary with the type of riser and hose so size of fittings should be checked with Agent. No slop discharge facilities available. 4 tanker berths available.

DENSITY: Varies from full salt to brackish in periods of heavy rainfall with freshets in the streams. No specifics available.

FRESH WATER: Available from 2 in. dock hydrants via ship's hose. About 100 gallons per minute.

FUEL: Bunker C not available for large vessels. Diesel fuel available via tank truck with 6 hours notice. Weekend and holidays order previous day.

DEVELOPMENTS: Turning basin may be enlarged to handle liners and large bulkers. Project depth 35 ft.

GANGWAY/DECK WATCHMEN: Tankers discharging gasoline required to have uniformed dock watchman. Usually off duty policeman. All ships provide own gangway and deck watch.

OPENING/CLOSING HATCHES: Normally done by stevedores. A few foreign ships prefer doing it with own crew.

CUSTOMS ALLOWANCES: 200 cigarettes, 50 cigars per man, and one bottle, U.S. quart, wine or spirits.

IDENTIFICATION CARDS: Desirable but not required by law.

CONSULS: All in Honolulu.

REPAIRS: Light machine shop, welding and burning and pipe work available. Plantations may do some heavy repairs if part can be sent to their shop. Their engineers are helpful in emergencies. Heavy or technical repairs must be done in Honolulu.

REPATRIATION: Agent can arrange by air via Honolulu. Immigration clearance necessary.

AIRPORT: Lihue is 3 miles from Nawiliwili and 20 miles from Port Allen; served by inter-island regular carriers. Numerous lines, and charter flights available.

TIME: GMT minus 10 hours, all year round.

HOLIDAYS: National: New Year's Day (Jan. 1st); President's Day (Feb. 22nd); Memorial Day (May 30th); July 4th; Labour Day (first Monday in September); Election Day (first Tuesday in November); Veteran's Day (Nov. 11th); Thanksgiving Day and Christmas Day (Dec. 25th). Cargo can be worked but at penalty rates.

POLICE/AMBULANCE/FIRE: Nawiliwili: Police 245–6721; Ambulance 2721; Fire 245–2222. Port Allen: Police 382–311; Ambulance 338–8311; Fire 335–5444, or call "O" for operator.

TELEPHONES: Arrangements by Agent.

SHORE LEAVE: Permitted after immigration check. Iron Curtain or Communist visitors may be restricted.

AUTHORITY: Department of Transportation, Harbors Division, administered by the District Manager.

NEW BEDFORD, Massachusetts: 41.38 N. 70.55 W.

DOCUMENTS: See "Boston".

PILOTAGE: 3 Massachusetts State pilots available, ordered through Agent. VHF monitored Channel 16. Pilot on station only after 12 hours notice. Small pilot vessel with basic communication equipment. Pilots board all vessels at Buzzards Bay Buoy at the entrance to New Bedford outer harbour situated at Long. 70° 50′ 07″ W. and Lat. 41° 30′ 42″ N.

ANCHORAGE: It is recommended that vessels delayed due to weather, etc., anchor 0.5 mile South of Buzzard's Bay Bell Buoy.

RESTRICTIONS: A modern harbour approach begins at Buzzard's Bay Buoy and runs a straight course of 7.5 miles direct to the pier facilities. The channel is 350 ft. wide and has a depth of 30 ft. MLW. The channel leads into a moderate size (1,000 yd.) turning basin.

MAX. SIZE: 700 ft. length. Vessels over 30 ft. draft restricted by tides.

HEALTH: See "Health: All Ports" before first U.S. port (Albany). Illness reports made to Boston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: RCA Chatham Radio, New Bedford Marine Operator for VHF, and Boston Marine Operator for ship to shore frequencies.

TUGS: Tugs join vessel in inner harbour. Tug lines used. 2 tugs available. Tugs are not normally used at the State Pier in docking and undocking of deep-water vessels. The large turning harbour basin, the wind-sheltered position of the pier and lack of tidal current minimise use of tugs. In extreme weather conditions tugs are used.

BERTHING: At State Pier, berthing space for 3 ships:
North side 600 ft. length, South side 775 ft. length, East side 450 ft. length.
Depth of water at all berths is 30 ft. MLW.
Maritime Terminal, depth 27 ft.

BRIDGES: Passage to upper reaches of harbour to Maritime Terminal requires navigation through the New Bedford and Fairhaven bridge only in daylight for larger vessels over 250 ft. length.

STEVEDORES: 24 hour notice required for New Bedford Stevedoring Corporation to prepare gear. 25 tons discharged or loaded per hour as average production per gang. Nearly all cargoes handled.

MEDICAL: 24 hours notice required. Excellent hospital facilities available.

TANKERS: Hurricane dike barrier gate 150 ft. wide with depth of 30 ft. MLW.

DENSITY: Static, since tidal variations light. Density same as ocean water.

FRESH WATER: Fresh water available.

FUEL: All types available, to be ordered in advance.

GANGWAY/DECK WATCHMEN: Watchmen available. Non police or police.

OPENING/CLOSING HATCHES: Depends on negotiated contract and cargo handled.

CUSTOMS ALLOWANCES: Designated by U.S. Customs with regard to particular circumstances.

CONSULS: Most Consuls available in Boston, 50 miles or 1 hour away.

REPAIRS: All types of minor ship repairs available.

REPATRIATION: Agent can handle formalities.

AIRPORT: 3 airports within 1 hour drive. All international services.

TIME: Shift ftom Standard to Eastern Daylight Saving Time. Local time GMT minus 6 hours.

HOLIDAYS: New Year's Day (January 1st); Washington's Birthday (February 22nd); Patriot's Day (April 19th); Memorial Day (May 30th); Independence Day (July 4th); Labor Day (first Monday in September); Columbus Day (October 12th); Veterans' Day (November 11th); Thanksgiving Day (last Thursday in November); Christmas Day (December 25th).

TELEPHONES: No telephones on board, but exist adjacent to pier.

SERVICES: All services can be obtained if required.

SHORE LEAVE: If U.S. Immigration has cleared crew member, he is allowed ashore.

AUTHORITY: Harbor Development Commission.

NEW HAVEN, Connecticut: 41.14 N. 72.55 W.

(See Plan Book)

DOCUMENTS: Refer to "New York".

PILOTAGE: Compulsory. State Pilots are available on a 24-hour basis and are usually arranged through the ship's Agent or directly by shipping companies. Pilot will board vessel in vicinity of New Haven Sea Buoy, marked "N.H." – short and long flash; black and white vertical stripes. Boarding will be from a 34-ft. steel launch named *New Haven Pilot* – black hull with "Pilot" marked on both sides in white letters, or from a tug-boat. Contact can be made via VHF telephone, Channel 13 (156.65 mHz), Channel 16 (156.80 mHz), or Channel 24 (157.20 mHz).

Pilotage Association Report: The New Haven – Bridgeport Pilots maintain a tide gauge at the T.A.D. Jones Dock, from where they depart to meet vessels. The normal tidal range is 6 ft. They believe that 4ft. of water in excess of the ship's deep draft is necessary for a safe transit. A rule of thumb, used by them, is 31 ft. on low water, and 37 ft. on high. (For any variation of this, a Pilot should be consulted.) A normal transit time from the entrance buoy to any of the berths in the inner harbour is 45 minutes to one hour. Docking time of 30 minutes to 1 hour should be added to this average, dependent on where the ship is berthing, as well as possible weather conditions.

There was a maintenance dredging of New Haven Harbour, completed in the Spring of 1974. The after-dredging survey submitted to them by the US Army Corps of Engineers shows a controlling depth, with rock bottom of 35 ft. at MLW. This rock is located at South West Ledge Light at a point where a 35° turn is executed by the ship.

Prevailing winds are Westerly, and have a decided effect on the rise of tide. The tide gauge is the determining factor as to the time of entry when wind conditions do exist.

ANCHORAGE: Vessels awaiting berth, and or tides, will find good anchorage up to 40 ft. draft within 1 mile South-Southeast of the "N.H." buoy.

RESTRICTIONS: Vessels can proceed to and from berths in New Haven Harbour at any hour during the day or night, weather and tide permitting. Entrance channel dredged to 34 ft. MLW. and width 400 ft.

MAX. SIZE: Draft up to 35 ft. subject weather and tides. Vessels of 50,000 d.w.t. with part cargo, do call occasionally, but should consult with the Pilot and terminal concerned.

HEALTH: See "Health: All Ports; before first U.S.A. port (Albany). Illness reports made to Boston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Vessels arriving from North use Chatham Radio. Vessels from South use Amagansett Radio on Long Island.

TUGS: Red Star Towing Company operates three tugs in New Haven. Two are single screw of 1,800 s.h.p. and 1,600 s.h.p., and one twin screw tug of 1,800 s.h.p. Weekdays from 0900 to 1700 hrs. the office is on Channel 19A. Tugs, when manned, monitor 19A-16 and 13. Dispatchers can be reached 24 hours a day through the Bridgeport Marine Operator. The number for Red Star is area code 203 – 865-1104.

BERTHING:

Wyatt Inc: Ships are not docked on the West side at ebb tide, though ships in ballast can sail whenever ready, regardless of flood or ebb tide. The East berth docking is done on flood or ebb, with draft to be considered. In the Spring of 1974, this terminal was dredged to 37 ft. on the West side, and 32 ft. on the East side. Fresh water and bunkers are available, with steam on the East side available through a 2 in. line, with 125 lb. pressure.

Ships of 715 ft. are regularly docked here. Vessels are docked port side to on the West side, and would be delayed if the East berth is occupied by a ship.

Gulf Terminal: The Gulf Dock is located parallel to the channel on the East side of the inner harbour, and ships of 35,000 d.w.t. with draft of 33 ft. 6 in. and LOA of 675 ft. are considered to be maximum size. (350 ft. from bow to manifold.)

The dock parallels the channel and consists of two main caissons, a centre platform and dolphins connected by a catwalk. Fresh water and bunkers are available. Ships consigned for T.A.D. Jones Terminal use this facility.

T.A.D. Jones: This dock is on the East side of the harbour, a 500 ft. finger pier at a 90° angle to the channel. The North side has 27 ft. of water and the South side is used for barges. Tankers, or dry cargo ships no longer call at this pier.

Red Star Towing Company have their office, and moor tugs on the North side of this dock.

Arco Terminal: Arco Dock parallels the main channel, and is 750 ft. long, with two main caissons, dolphins, and platform, connected by catwalks. Ships up to 50,000 d.w.t., and 35 ft. draft use this berth arriving on the rising tide, and 32 ft. on low water in berth. Ships are docked starboard side to.

Bunkers are not available, though fresh water is, but only in mild weather.

New Haven Terminal, Inc.: This facility has three ship berths on a 90° heading from the channel, dredged in 1974. The Scrap Dock, as it is called, is a continuous pier, with a wearing strip cushioned by a rubber backing. The pier is 650 ft. long, with 35 ft. at MLW. Scrap is loaded from here and all types of dry cargo handled. Two gantry cranes are on the dock and additional mobile cranes are available. Railroad cars can be brought on to the dock. Ships berth port side to.

The Finger Pier on the North side is a continuous pier, 650 ft. long, and is mainly used as a tanker berth. Bow to manifold is 350 ft. (additional hoses can be added to increase this distance.) The slip is 196 ft. in width, and two ships may be accommodated at the same time, as long as 25 ft. is allowed for a tug boat between the ships. Depth 35 ft. at MLW.

The South side is a tanker or general cargo berth, with 40 ft. at MLW. Bow to manifold is 350 ft. and additional hoses may be used. Ships of 700 ft. may be secured at all three of these berths.

Bunkers can be trucked in, and fresh water is available at all berths.

Exxon Terminal: Exxon Dock parallels the main channel. The dock is 750 ft. long with two main caissons, dolphins, and platform connected by a catwalk.

Ships of 50,000 d.w.t. call at this dock, with a draft of 34 ft., docking on the rising tide. Ships are docked starboard side to. Bunkers are not available, though fresh water is.

BALLAST: There are no slop lines available.

FUEL: Available from oil terminals or delivered by barge.

FRESH WATER: Available at all terminals.

MEDICAL: All facilities available.

CUSTOMS ALLOWANCES: At the discretion of Customs Officers. Normal allowance is 200 cigarettes or 2 lb. of tobacco and 1 quart wine/spirits per man. Additional allowances may be given if considered necessary, due length of vessel's stay in port.

AIRPORT: New Haven Airport 1 mile distant. New York International Airport 70 miles distant.

CONSULS: All countries represented in New York.

HOLIDAYS: New Year's Day (1st January); Washington's Birthday (22nd February); Memorial Day (30th May); Independence Day (4th July); Labor Day (first Monday in September); Colombus Day (12th October); Veteran's Day (11th November); Thanksgiving (fourth Thursday in November)' Christmas Day (25th December).

TIME: Eastern Standard Time, GMT minus 5 hours. Daylight Saving Time, GMT minus 4 hours from April to October.

SERVICES: Total Marine Services of New Haven offers launch service to ships at anchor, movement of stores, and skin divers.

GENERAL: Through a co-operative agreement, all the terminals have a slick boom, skimmers and absorbent available at all times. A fireboat, owned by the city of New Haven, is located within one half mile of any terminal, and is equipped to handle any type of fire.

There are no slop tanks available in this port for pumping ballast.

None of the terminals supply gangways; ships must use their own.

AUTHORITY: State of Connecticut, Department of Transportation, Bureau of Waterways, State Pier, New London.

NEW LONDON: Connecticut: 41.21 N. 72.06 W. (See Plan Book)

DOCUMENTS: Refer to "New York".

PILOTAGE: Vessel usually notifies Agent 48 hours before arrival, who will arrange Pilot boarding. Pilot boards at Sarah's Ledge, which is close to anchorage at harbour entrance.

ANCHORAGE: In Thames River, and in Long Island Sound, approx. 2 miles W.S.W. of New London Ledge Light bounded by lines connecting points which are following bearings and distances from New London Ledge Light: 246°, 2.6 miles; 247°, 2.1 miles; 233°, 2.1 miles; and 235°, 2.6 miles.

RESTRICTIONS: Pilots recommend daylight docking but can dock at night if necessary. Entrance channel 33 ft. deep.

MAX. SIZE: Dry cargo vessels and tankers 700 ft. long are using the harbour. Facilities for larger vessels will be available when proposed dredging to 36 ft. is completed.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Boston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Vessels arriving from North use Chatham Radio on Cape Cod. Vessels from South use Amagansett Radio on Long Island. However, either one may serve the purpose.

TUGS: Usually join vessel at Ledge Light if a dry cargo vessel, and off Sarah's Ledge if a tanker. Tugs use ship's lines; if tug's lines are used this is part of charge.

BERTHING: Advance ETA must be made for berthing, and it is suggested to dock during daylight hours when possible.

State Pier No. 1: depth, 28 to 36 ft. MLW.
Dow Chemical Co. Wharf: depth, 22 ft. MLW.
City Wharf Ferry Terminal: depth, 22 ft. MLW.

BRIDGES: There are no bridges across Main Ship Channel. However, at New London, at the head of the Main Harbour, the Thames River is crossed by 1 drawbridge and a twin fixed bridge: the New York, New Haven and Hartford Railroad bascule bridge with a horizontal clearance of 151.5 ft. and a vertical clearance of 30.9 ft. at high water and a fixed highway bridge with a horizontal clearance of 200 ft. and a vertical clearance of 135 ft. at high water.

STEVEDORES: ETA of 72, 48 and 24 hours is required, as gangs must be requested by 1500 hrs. on weekdays. Average discharge, about 20 tons per gang per hour.

TANKERS: Discharge at Hess Oil Co. berth, 12 in. and 10 in. lines.

Hess Oil Dock: depth alongside 36 ft.
Texaco Wharf: depth alongside 18 ft.
Pfizer Wharf: depth alongside 18 ft.

MEDICAL: All facilities available.

FRESH WATER: Available at pier side through 2.5-in. and 1.5-in. hoses.

FUEL: Available at tanker berths or by barge.

GANGWAY/DECK WATCHMEN: Not required and not recommended.

OPENING/CLOSING HATCHES: Performed by stevedores.

IDENTIFICATION CARDS: Not required.

CONSULS: Nearest at New York.

REPAIRS: 3 waterfront marine repair plants are equipped to repair vessels at the port. The Nelseco Navigation Co. and Thames Shipyard Inc. each owns and operates a plant at New London on the right bank of the Thames River; the General Dynamics Corp., Electric Boat Division owns and operates a shipyard and marine repair plant at Groton on the left bank of the river.

DRY DOCKS: 1 floating dry dock, 1 graving dock and 3 marine railways are available to the public at 2 of the marine repair plants.

1 floating dry dock, steel construction, with a lifting capacity of 6,500 tons, located on the West side of the pier E, has an overall length of 448 ft. length of 435 ft. 6in. on the keel blocks, overall width of 97 ft. inside clear width of 70 ft. and depth of 26 ft. of water over the keel block when submerged.

1 graving dock, located South of Piers A, B, C, and E, has length of 515 ft., width of 70 ft., and 35.5 ft. depth of water over the sill and 34.5 ft. over the keel blocks at MHW.

REPATRIATION: Facilities exist.

AIRPORT: Nearest airport is Trumbull Airport, situated about 3 miles East of Groton, Connecticut. There are scheduled commercial airlines serving this field. Allegheny Airlines and Pilgrim Airlines run frequent connecting flights to Bradley and Kennedy International Airports.

TIME: Eastern Standard Time, GMT minus 5 hours. Daylight Saving Time, GMT minus 4 hours, from April to October.

HOLIDAYS: New Year's Day (1st January); Lincoln's Birthday (12th February); Washington's Birthday (22nd February); Good Friday; Memorial Day (30th May); Independence Day (4th July); Labour Day; Columbus Day (12th October); Veteran's Day; Thanksgiving Day; Christmas Day (25th December). Cargo work can be arranged on holidays.

POLICE/AMBULANCE/FIRE: Police, 443–4315; Ambulance, 443–4388; Fire, 443–4381.

TELEPHONES: Available if required.

SHORE LEAVE: Allowed.

DELAYS: Availability of berthing might cause some delay.

AUTHORITY: State of Connecticut, Dept. of Transportation, Bureau of Waterways, Office of the Deputy Commissioner, State Pier, New London.

NEW ORLEANS, Louisiana: 29.56 N. 90.04 W. (See Plan Book)

DOCUMENTS:

3 copies Cargo Manifest (Forms 7527-A or 7527-B), the original showing all cargo on board, and 2 copies showing only cargo for this port.
2 copies Crew Manifest (curio list).
2 copies Stores List.
2 copies Passenger List (Form I–418).
2 copies Crew List (Form I–418).

Customs boarding officer will also examine Ship's Register and Load Line Certificate. In addition, the following documents will be required for formal entry to be made within 48 hours of arrival from abroad, or 24 hours from arrival from a United States Port:

Health Pratique.
Master's Oath (Customs Form 3255).
All foreign clearances.
U.S. Certificates of payment of Tonnage Tax (Customs Form 1022).
Certified Crew List.

The Bureau of Customs at New Orleans, Louisiana, will not, regardless of the circumstances, accept Customs Entry Papers from vessels unless they are on the proper U.S. Custom Forms and properly prepared.

Specially referred to are Customs Forms 1303 (Ship's Stores Declaration), 1304 (Crew Effects Declaration) and 7527 (Inward Foreign Manifest).

U.S. Customs at New Orleans require that the 1303 be completed, that is all stores (deck, engine, etc.) be listed on the form; it must also include fire-arms and medicines. They will not accept "as per attached list".

Form 1304, Crew Effects List, must likewise be properly completed. All effects and curios will have to be listed on the form. The term "souvenirs" is not sufficient and may not be used. All values have to be listed. Attachments to the 1304 are not permitted. (This does not apply to American Flag vessels using the Form I-418 Crew List with Crew Declaration numbers listed for their souvenir list.)

The Inward Foreign Manifest must be Customs Forms 7527-A, 7527-B, or a manifest form approved by the Bureau of Customs, Washington D.C. Should the latter be used it must have the Bureau's approval number printed on the form.

PILOTAGE: Advise Agents ETA at sea buoy 48 hours in advance. Agent will arrange for Pilot. Pilot boat 46 ft. long, red hull, white cabin, flying blue and white Pilot flag. Pilot boards at sea buoy, requires Pilot ladder 6 ft. above water level. Pilot boats can be contacted by VHF, Channel 9 when 30 to 40 miles off, or ship-to-ship Channel 2738. Bar Pilot is exchanged for river Pilot at Pilot town, Head of Passes.

Following advice received from Crescent River Port Pilots Association

Cable: Crespilots, New Orleans.

Vessels bound to any destination on the Mississippi River and Mississippi River Gulf Outlet are requested to supply the following information via Coastal Radio Telegraph addressed to Crespilots, New Orleans:

(1) ETA – twenty four (24) hours before expected arrival at Pilot station (Sea Buoys), and any change of ETA in excess of two (2) hours.

(2) Indicate if vessel is arriving Mississippi River or Mississippi River Gulf Outlet.

(3) Deepest fresh water draft and speed of vessel.

(4) Please contact Pilot station at entrances via VHF Radio Phone on Channel 16 (156.80 mHz), Channel 9 (156.45 mHz), or, Channel 13 (156.65 mHz) at least two (2) hours prior to arrival for boarding instructions.

Your co-operation will greatly assist in expediting the dispatching of Pilots and avoid costly delays to your vessels.

ANCHORAGE: Safe anchorage within 2 miles South pass or S.W. pass entrance. At the Point, below New Orleans, vessels may anchor without tug assistance.

RESTRICTIONS: Draft governed by S.W. pass, project depth 40 ft. Entrance day and night. New Orleans is 115 miles upriver.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: Available, and join vessel off berth if required. One tug normally used for berthing/unberthing at New Orleans.

BRIDGES: 2 bridges cross river at New Orleans, 1 at Baton Rouge and 1 at Donaldsonville. Sufficient clearance at all times.

BERTHING: *Public Grain Elevator.* No. 2 berth, 670 ft. long, 40 ft. depth; No. 3 berth, 650 ft. long, 40 ft. depth; No. 4 berth, 635 ft. long, 40 ft. depth.

Loading Rates 20,000 bushels per hour per belt, in berths 2 and 3; up to 40,000 bushels per hour per belt, in berth 4. Each berth has 2 loading belts.

Southern Scrap Material Co: Berth 550 ft. long, 32 ft. depth. Loading 200 t.p.h. with cranes.

Chalmette: Humble Oil Terminal: tanker berth 30 ft. depth; Tenneco Oil Terminal: tanker berth 35 ft. depth.

Kaiser: Chalmette Wharf: Aluminium discharge facilities, max. draft 38 ft.

Terminals on West Bank of Mississippi:

Amesville: Texaco tanker loading berth, 34 ft. alongside. 2×8-in. hoses loading up to 12,000 b.p.h. No ballast facilities.

Avondale: American Liberty Tank Terminals berth, 60 ft. alongside. 4 × 6-in. hoses loading up to 18,000 b.p.h. No ballast facilities. International Tank Terminals berth, 45 ft. alongside. 12-in. hoses loading 150 t.p.h.

Gretna: Publicker Chemical Corp.: berth 30 ft. alongside. Southern Pacific Company: berth 600 ft. long, 35 ft. depth; dry cargo discharging only. Industrial Molasses Corp: berth 27 ft. depth; 2 × 10-in. pipe-lines, loading 200 t.p.h.

Marrero: Hess Terminal Corp: tanker berth 38 ft. depth; 6 × 12-in. hoses loading 500 t.p.h. Texaco: tanker berth 35 ft. depth; 6 × 16-in. lines loading 250 t.p.h. No ballast facilities.

St. Rose: Cities Service: tanker berth 35 ft. depth; International Tank Terminals: berth 35 ft. depth; no fresh water available.

Westwego: Continental Grain Elevator: berth 600 ft. long, 40 ft. depth; loading 1,000 t.p.h., 2 loading belts. Louisiana Dock: 28 ft. alongside, bulk oil products loaded 200 t.p.h. Pacific Molasses Co: berth 35 ft. alongside.

CONTAINER HANDLING FACILITIES: Handled at most docks. Full container facilities at Morrison Yard wharf, length 430 ft. France Road berth No. 1 with 830 ft. leased to Sea-Land. Napoleon Avenue wharf 1,520 ft. Nashville/Henry Clay wharf 2,820 ft.

France Road berth No. 4, wharf 700 ft. France Road berth No. 5, wharf 900 ft. Berth No. 4 leased to Navieras de Puerto Rico and berth No. 5 leased to J. Young Stevedores.

STEVEDORES: Working hours 0800–1200 and 1300–1700 hrs. Monday to Friday.

MEDICAL: All facilities available.

DENSITY: Fresh water (1000).

FRESH WATER: Available ex-wharf.

FUEL: Only available by barge. Oil companies can supply Bunker "C" ex-terminals at Amesville and Marrero.

GANGWAY/DECK WATCHMEN: Recommended if any crew detained by Immigration.

CUSTOMS ALLOWANCE: At the discretion of Customs officers. Normal allowance is 200 cigarettes or 2 lb. tobacco and 1 quart wine or spirits per man. Additional allowances may be given if considered necessary, due to length of vessel's stay in port.

IDENTIFICATION CARDS: Standard U.S. Immigration Forms I-95 to be made up for each Crew member on arrival. Not necessary for crew man already holding Form I-95, issued for the same vessel.

AIRPORT: New Orleans International Airport, served by most airlines.

TIME: Central Standard Time. Daylight Saving Time from May to October.

HOLIDAYS: New Year's Day (1st January); Martin L. King's Birthday (15th January); Good Friday; Memorial Day (30th May); Independence Day (4th July); First Monday in September (Labor Day); Veteran's Day (Last Monday in October); Fourth Thursday in November (Thanksgiving); Christmas Day (25th December). No work on New Year's Day, Independence Day, Labour Day and Christmas Day.

SHORE LEAVE: Allowed for any Crew member not detained by Immigration.

DEVELOPMENTS: A fourth full-container berth with double Ro/Ro pad, class A & B, and marshalling area under construction at the France Road Container Terminal on the Industrial Canal, length of berth 800 ft., equipped with 40 ton crane. Also available will be 8 acres of back-up marshalling and refrigerated warehouse and stuffing area.

A new roll-on/roll-off cargo-handling facility on the Industrial Canal adjacent to the Florida Avenue wharf, and new ship-repair facilities at the Alabo Street wharf on the Mississippi below the Industrial Canal.

SHIPMASTER'S REPORT: 1975.

Documents:

1 Crew List on Form I-418 to be visaed by US Consul at last port prior to arrival at a US port.
4 Crew Lists on Form I-418 (Another 2 copies if coastwise).
4 Store Lists on Form 1303 (Another 2 copies if coastwise).
4 Crew Effects Declaration 1304 (Another 2 copies if coastwise).
4 Ship Stores Declaration. 1303 (Shop List).
1 Crew Landing Permit Form I-95A is required by every Crew member not having a plastic Permit Form I-184. also seamans Red I.D. Card or Passport (Discharge Book does Not repeat Not qualify as a travelling document).
Masters Oath and General Declaration are normally completed by Agent.
Radio Pratique. No Form required.
Clearance from last port.
Ships Register with all certificates up to date.
2 Copies of Manifests covering cargo in transit.

Customs: Stores List. Curio List. 1 Crew List. Sealed High Duty Bond, Unchecked.

Immigration: Visaed Crew List. Seamans Red I.D. Card or Passport along with American Crew Pass. Typed. Question asked by Officials "How long at sea?" I.D. Card handed back to seaman with American Pass stamped. Department very thorough and efficient.

No mail or money to be distributed until Immigration completed, also no persons permitted ashore or onboard until formalities completed except for Agents and Officials.

If no visaed crew list Master signs official form. Cost US$10.0 for whole ship's company.

Port Health: Radio pratique not granted as seamens' cards not completed. No representative visited vessel. Report any death through Agents.

Agriculture Dept.: Inspected vessel. Galley, Messrooms, Storerooms, etc. Meat and Vegetable rooms sealed.

Garbage bins to be covered (Collection expensive, retain on board until sail if possible).

Rat guards to be used.

Provisions and Stores: Select own supplier. Agent reticent to suggest anyone. Prices comparable UK with good quality expensive. Stores and Medicines ordered through providor.

Laundry: Satisfactory. Billed by weight. 24 hour service.

Watchmen: None placed on board but security police at section openings.

Telephone: None placed on board. Use office on quay side.

Water: Plenty available. Shore connections used. Cost, 23 cents per 1,000 gallons.

Bunkers: Delivered by barge. Charged for what is ordered. Do not over stem. Barge hired from private firm. Any bunkers not taken paid for and revert to barge owners.

Walport Films: Exchanged.

Coast Guard: Require number of Oil Pollution Certificate (Certificate of Financial Responsibility). Whether AMVER participant. Require ship's particulars including horsepower. Displacement tonnage on sailing. Name of Master and Chief Officer. Dangerous cargo particulars and stowage.

National Cargo Bureau: Representative from National Cargo Bureau comes onboard and requests ship's particulars also ports of call to and from. Inspector looked at hatches where cargo to be loaded. He then issues a Certificate of Readiness. Loading can then commence.

Code of Federal Regulations: Each ship should have a copy. Difficult to come by. Acquired 1970 copy from Agents. Equivalent to our 'Blue Book'.

Repairs: Select own firm. Anxious to please. Unable to judge as little work contracted out.
Money: Delivered by separate security firm. Satisfactory.
Radio Messages: Send ETA at least 48 hours before arrival to Agents and Branch Pilots with draft. Notify Captain of Port of any explosives for discharge or in transit. If all healthy and documentation correct ask for Radio Pratique. Confirm ETA at 24 and 10 hours. Inwards send ETA to Agents after passing Pilot Town. Agent will notify if radio pratique granted. Not necessary to fly "Q" flag going up river.
Stevedores: Hours of work 0800 to 1200 hrs., 1300 to 1700 hrs. Straight time. Weekday gangs will work until 1800 or 1900 hrs. to finish. Night: 1800 hrs. to midnight, 0100 to 0600 hrs. Head Stevedore checks Factory Act Book. Gangs will work continuously except for 3 hours in any 24 hours. 4 different Union Contracts. Plan maker makes own plan then airmails same to ports of discharge. Crew open hatches also close same. Crew not to do any cleaning.
General: Use S.W. Pass at all times. South Pass has only 18 ft. of water and shoaling all the time.

Pilot boards on lee side at Sea Buoy – Flash "A" (· –) from fast launch painted black. Ladder about 6 ft. from water level. Branch Pilot takes vessel to Pilot Town where River Pilot takes over. Ladder usually starboard side inward and port side outward 8 ft. above water. First come first served at sea buoy. About 1.5 to 2 hours from Sea Buoy to Pilot Town and about another 6 hours to berth. Proceed up river at harbour full speed. Reduce speed occasionally for long tows, dredgers and ships on loading berths.

River Pilot docks vessel.

Signals by day "H" flag. By night nothing.

Inland waterways rule of road applies.

We had clear daylight run up river and down at night. Mid December. Start of fog. Low fog experienced on water also some patches, fairly thick. If fog does develop it is worth remembering that once past Pilot Town Southbound, few if any places to anchor and one has to continue on.

Racon at entrance useful. Anchorages as per charts. When arriving contact Pilot on VHF Channels 9, 12, 13.
Berth: Satisfactory. 24/29 Market Street. Just past bridge. Quite a long walk to open section to get out of docks. Recommend at night get taxi back and if walking into town by day at least 2 persons.

Sufficient bollards. No cranes. Berth head up. Usually starboard side to.

Moorings. 4 headlines, 4 stern lines plus 2 springs each end. Passing traffic fairly heavy with considerable wash. Rat guards a requirement.

Ship's gangway. Quay about 25 ft. above water level. Wooden pile fenders very effective.
Tugs: Used for berthing and unberthing. 1 only alongside port forward shoulder. 2 tugs lines. When making fast tug passes portable Walkie Talkie on board to send up to Pilot on bridge. Pilot left by tug which used own ladder.
Radar: Satisfactory repairs carried out.
AUTHORITY: Port of New Orleans, Board of Commissioners.

NEW YORK, New York and New Jersey: 40.43 N. 74.00 W. **(See Plan Book)**

DOCUMENTS:

3 copies Cargo Manifest (Forms 7527-A or 7527-B), the original showing all cargo on board, and 2 copies showing only cargo for this port.
2 copies Crew Manifest (Curio List).
2 copies Stores List.
2 copies Passenger List (Form I-418).
2 copies Crew List (Form I-418).

Customs boarding officer will also examine Ship's Register and Load Line Certificate.

In addition the following documents will be required for formal entry, to be made within 48 hours of arrival from abroad:
Health Pratique.
Master's Oath (Customs Form 3255).
All Foreign Clearances.
U.S. Certificates of payment of Tonnage Tax (Customs Form 1002).
Certified Crew List.

PILOTAGE: Compulsory for foreign flag ships, and U.S. ships bound to and from foreign ports.

24 hours notice of ETA required. Pilot boat should be contacted on VHF Channel 16, or ship-to-ship Channel 2638 or 2738. Vessels requiring Pilot should hoist signal letter "G" in daytime. In foggy weather the letter "X" should be sounded on whistle.

Pilot boat is generally found about 1.5 miles West of Ambrose Light Tower. In bad weather Pilot tries to stay windward of normal Pilot station.

In poor visibility an inbound ship should make Ambrose Tower and then proceed at slow speed to the Ambrose Channel sea buoy while blowing the letter "X" on her whistle. If no Pilot is obtained by the time she is in the vicinity of the sea buoy she should then anchor about 0.5 mile to 1 mile North of the line from Ambrose Tower to the sea buoy and await Pilot.
ANCHORAGES: For ships entering from Sandy Hook there are anchorages in lower New York Bay, Gravesend Bay, Raritan Bay, and Arthur Kill off Perth Amboy. In the Upper Bay, anchorages available off Bay Ridge for 30 days, off Jersey City for 72 hours, and off Stapleton for 48 hours. For vessels entering via Long Island Sound there are anchorages in the Western end of the Sound and in the East River.

Vessels entering New York harbour are required to have 2 working anchors, by U.S.C.G. regulations.
RESTRICTIONS: Ambrose Channel, 10 miles long, maintained to a width of 2,000 ft. and a depth of 45 ft. MLW. The Northern approach to the harbour is through Long Island Sound into the East River. Main channels in the port are maintained to a depth of 45 ft. MLW.
MAX. SIZE: Restricted only by berth depth and location.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New York Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
VHF: All vessels over 100 tons gross are required to keep continuous watch on VHF Channel 13 when in areas where U.S. Inland Water Regulations apply.
TUGS: Over 50 private towing and transportation companies registered in the port.
BERTHING:
Staten Island: Howland Hook Container Terminal, 3 berths (32 ft. alongside).

Brooklyn: 57 general cargo berths, including 2 container berths at Northeast Terminals, and 27 Modern breakbulk berths at the Brooklyn Port Authority Piers (depth alongside range 30-34 ft.).

East River: 3 berths general cargo piers on Manhattan shore.

Hudson River: New Passenger Ship Terminal on Manhattan Shore between 48th and 52nd Streets provide 6 ship berths. 3 berth passenger ship faciliity at Houston St.

Hoboken Port Authority Marine Terminal: 3 piers, 6 general cargo berths.

Weehawken: 2 berth container facility at Port Seatrain.

Jersey City: 2 berth container facility at Port Jersey (Global Terminal).

Newark, N.J.: Port Newark (22 general cargo, 5 specialized, and 4 container berths). Depth range alongside 30-34 ft.

Elizabeth, N.J.: Elizabeth Port Authority Marine Terminal, 22 full container berths, channel depth 35 ft.
CONTAINER FACILITIES: *Newark and Elizabeth, N.J.:* Port Newark and Elizabeth Marine Terminal on the Western shore of Newark Bay, most intensively developed container terminal area in the world with almost 4 miles of berthing space, over 1,265 acres of container marshalling area, 23 container gantry cranes with capacity range of 30-70 tons. An international railroad container transfer yard serves both terminals.

Jersey City: A 2 berth, 84 acre container facility (Global Marine Terminal, Port Jersey) with 1,800 ft. of berthing space and 3 container cranes of 40 ton capacity.

Staten Island: A 3 berth container terminal at Howland Hook at the Northwest corner of Staten Island of 187 acres with 2,500 ft. of berthing space, 4×30-ton and 1×40-ton gantry cranes.

Weehawken: A 2 berth container facility at Port Seatrain of 87 acres and 1,885 ft. of berthing space equipped with 3 × 45-ton gantry cranes.

Brooklyn: 2 container berths of 87 acres with 2 gantry cranes of 50 and 70 tons capacity located between 29th and 39th Streets.
CRANES: Mobile floating cranes with capacity up to 500 tons available.
STEVEDORES: 13 stevedoring firms are active in the port, many of whom are also terminal operators. Normal working hours 0800-1700. Bulk Cargo work usually continues through 24 hours.
TANKERS: *Brooklyn:* Paragon Oil Terminal, 2 berths, depth 37 ft.; Patchoque Oil Terminal, 2 berths, depth 29 ft. and 35 ft.; Whale Oil Terminal, 1 berth, depth 36 ft.

Hudson River: Tappan Oil Co., 1 berth, 35 ft.

Bayonne, N.J.: Public Oil Terminal, 3 berths, 32 ft. depth; Humble Oil Terminal, Constable Hook, up to 38 ft. depth; Ross Oil Co., 3 tanker berths up to 38 ft. depth; Texas Oil Co., 4 tankers berths, up to 32 ft. depth; Texaco, 4 berths up to 32 ft. depth.

Kill Van Kull: Lehigh Tanker Terminal, chemicals, 35 ft. depth; Humble Oil Co., 3 tanker berths, up to 38 ft. depth; Texas Oil Co., 4 tanker berths up to 32 ft. depth; Ross Oil Co., 1 berth up to 32 ft. depth.

Newark, N.J.: 4 berths, 31 and 32 ft. depth.

Elizabeth N.J.: Chevron Oil Company, 1 tanker berth, 26 ft. depth; Crown Central, 1 tanker berth, 30 ft. depth.

Arthur Kill: **Perth Amboy:** Chevron Oil Co. (tanker berth, 26 ft. depth); Hess Oil Co. (tanker berth 30 ft. depth); Cities Service (tanker berth, 34 ft. depth); **Sewaren,** Royal Petroleum Co. (tanker berth, 32 ft. depth); Public Service Co. (tanker berth, 35 ft. depth); Shell Oil Co. (tanker berth, 35 ft. depth). **Port Socony,** Mobil Oil Co. (2 tanker berths, 27 and 30 ft. depths). **Carteret,** American Oil Co. (tanker berth M, 25 ft. depth); General American (2 tanker berths, 25 and 35 ft. depth). **Linden,** Cities Service (tanker berth, 32 ft. depth); Humble Oil Co. (tanker berth, 35 ft. depth); Sinclair Oil Co. (tanker berth 31 ft. depth). **Gulfport,** Gulf Oil Co. (tanker berth, 32 ft. depth).

Shipmaster's Report: 1976.
Greater New York Terminal, Astoria, Long Island:
Location of Berth: 40° 47′ N., 73° 53.7′ W.
Distance from Entrance to Berth: 28 miles.
Max. Size at Berth: LOA, 900 ft. Draft, Pilot stated 34 ft.
Restrictions: Vessel should be ballasted sufficiently to pass under Brooklyn Bridge, clearance 127 ft.

Vessels may berth and unberth day and night but only at certain stages of the tide.
Anchorage: At Stapleton as designated by USCG.
Terminal Information: Starboard side manifold to barge at Stapleton Anchorage, use 6 in. hoses. Port side manifold use at the

berth, ships hoses not required. The connection is 12 in. running into 18 in. Nearest shore tank 1,000 ft. from berth. Line fitted with steam jacket but not efficient. Max. pressure allowed 125 p.s.i. Shore gantry used at berth. Derrick used at anchorage for discharging into barge. Product handled: Fuel Oil (Heating Oil). No slop tanks available.

General: Pilotage compulsory. Ambrose Pilot requires 24 hours notice of arrival. Radio station handling traffic is Chatham. Most services are available at the berth, however it is advisable to take stores and send laundry from Stapleton Anchorage as there is no means of delivery at the berth other than carrying by hand. Stapleton Launch Service, tel. 981-8333/8384. Fresh water may have to be taken by barge in very severe weather as shore lines become frozen.

Approaching: From a Line from Rockaway Inlet to Ambrose thence Highlands Light, vessel must remain on VHF Channel 13 for ship-to-ship communication. When Pilot on board he maintains this Channel and ship can use own VHF other Channels. Marine operator on VHF 26 (call). For the passage of East River (Remember Brooklyn Bridge Clearance 127 ft.). One tug each bow alongside. After Hell's Gate and passing Port Morris to port, vessel cants to starboard to pass between North and South Brothers to starboard and Rikers Island to port through 500 ft. wide buoyed channel (some unlit) South to berth (inwards). It is preferable to come through Hell's Gate at HW or LW slack, thus avoiding cross currents between Brothers at other times.

FRESH WATER: Available at most piers in the port district at a nominal rate. Water barge available to serve vessels at anchor in emergency but this is expensive.

FUEL: All grades of fuel readily available. Except for tankers loading or discharging, bunkers are normally delivered by barge. It may be economical to shift vessel to refuelling berth.

GANGWAY/DECK WATCHMEN: Available and recommended if any crew detained by Immigration.

CUSTOMS ALLOWANCE: 200 cigarettes or 2 lb. tobacco, 1 quart wine/spirits per man.

IDENTIFICATION CARDS: Standard U.S. Immigration forms I-95 to be made up for each crew member on arrival.

CONSULS:

Australia	tel. Circle 5–400
Belgium	tel. Judson 6–5110
Brazil	tel. Plaza 7–3080
Canada	tel. Judson 6–2400
Chile	tel. 682–9120
Denmark	tel. 679–5101
Finland	tel. 832–6550
France	tel. Lehigh 5–0100
Germany	tel. Murray Hill 8–3523
Great Britain	tel. Plaza 2–8400
Greece	tel. Yukon 8–5500
India	tel. Trafalgar 9–7800
Italy	tel. Regent 7–9100
Japan	tel. Yukon 6–1600
Liberia	tel. Mu. 7–1025
Netherlands	tel. 246–1429
Norway	tel. Wh. 4–6920
Panama	tel. Circle 6–3773
Portugal	tel. Circle 6–4580
South Africa	tel. Templeton 8–1700
Spain	tel. Eldorado 5–4080
Sweden	tel. 751–5900
Venezuela	tel. Plaza 7–7750

And many others.

REPAIRS: All facilities available for any size vessels.

DRY DOCKS: 4 docks with lifting capacities up to 25,000 tons (Bethlehem) and 1 dry dock capable of handling vessels of up to 1,100 ft. LOA, 140 ft. beam and 120,000 d.w.t.

TIME: Eastern Standard Time, GMT minus 5 hours. Daylight Saving Time, GMT minus 4 hours from April to October.

AIRPORT: Kennedy International Airport, Newark International Airport, La Guardia Airport.

HOLIDAYS: New Year's Day (January 1st); Lincoln's Birthday (February 12th); Washington's Birthday (February 22nd); Good Friday; Memorial Day (May 30th); Independence Day (July 4th); Labour Day (first Monday in September); Columbus Day (October 12th); Armistice day (November 11th); Thanksgiving (fourth Thursday in November); Christmas Day (December 25th). No work on New Year's Day, Independence Day, Labour Day and Christmas Day.

SHORE LEAVE: Allowed except for crew members detained by Immigration.

AUTHORITY: Port Authority of New York and New Jersey.

NIKISKI, Alaska: 60.41 N. 151.24 W.

Located on West side of Kenai Peninsula between Homer and Anchorage. Pan and brash ice in Inlet from November to March. Never freezes solid. Open all year.

APPROACHES: Via Cook Inlet.

DOCUMENTS: See "Anchorage, Alaska".

PILOTAGE: Pilot pick-up point 1 mile South of Homer Split light. Also see "Homer" Pilotage.

ANCHORAGE: Good anchorage.

MAX. SIZE: Harbour depth excess 40 ft. Max. size 80,000 d.w.t. Tides diurnal range 28 ft. Also "Berthing".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

CUSTOMS: Quarantine, local. Immigration and Customs from Anchorage, Alaska.

TUGS: From Anchorage.

BERTHING: 1, Port Nikiski Dock: 3 sided, 550 ft long, 200 ft. on each side, 1,000 ft. wide, 12 feet at MLLW. 400 ft. by 75 ft. covered storage.

2. 3 finger piers for tankers and bulk carriers. All exceed 40 ft. depth.

All 3 berths are dolphin berths ideal for rapid bulk loading. Main products, *(a)* Collier Chemical Dock: Bulk area and ammonia gas. *(b)* Phillips Petroleum Dock: petroleum products and liquid natural gas. *(c)* Kenai Pipe-line Dock: Refined and crude Petroleum products.

STEVEDORES: 2 gangs.

REPAIRS: Some at Kenai.

FRESH WATER: Limited.

FUEL: Not available.

MEDICAL: Health Centre, 3 doctors, 3 dentists.

TRANSPORTATION: Highway to Anchorage and Homer. Air transport available.

OAKLAND, California: 37.50 N. 122.18 W.

(See Plan Book)

Also See "San Francisco" *for Documents, Pilotage, etc.*

HEALTH: See "Health: all Ports" before first U.S.A. port (Albany). Illness reports made to San Francisco Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

BERTHING: *Outer Harbour Terminal:* Operator: Crescent Wharf and Warehouse,1401 Terminal Street, Oakland, Ca. 94607. Tel. (415) 465-8681.

1 combination Break-Bulk/Container/Oil transfer facility. 191 m. (256 m. at Berth 10). 10.7 m. at MLLW. 250 ton mobile crane equipped to handle 20 and 40 ft. containers.

Berth 10 operated by Crescent Warehouse Co., 1625 Maritime Street, Oakland, Ca. 94607. Tel. (415) 763-1550.

New 2 berth Container Terminal under construction served by 2 container cranes.

Sea-land Container Terminal: Operator: Sea-land services, Inc., 1425 Maritime Street, Oakland, Ca. 94607. Tel. (415) 271-1000.

Berths: 2, Length 1,355 ft., water depth 40 ft. MLLW.

Container handling facilities: 4 Paceco, 30-ton cranes; 2 truck scales; 250 refrigerated container outlets. Chassis operation.

Matson Container Terminal: Operator: Matson Terminals, Inc., 3050 7th Street, Oakland, Ca. 94607. Tel. (415) 893-2456.

Berths: 3, including 1 for roll-on/roll-off operations. Length 2,220 ft., depth 35 ft. MLLW.

Container-handling facilities: 3 container cranes – 27.5 ton Star; 30-ton Paceco; 33-ton Star. 1 truck scale; 200 refrigerated container outlets. Container yard is straddle carrier-type operation (containers stored 2 or more high).

Oakland Container Terminal: Operator: Oakland Container Terminal Co., 707 Ferry Street, Oakland, Ca. 94607. Tel. (415) 834-5822.

Berths: 2, length 309 m. depth 10.7 m. MLLW.

Container handling facilities: 1 Modified "A" frame Paceco 40-ton container crane; 1 truck scale; 150 refrigerated container outlets. Container yard utilises wheeled Paceco transtainers. Containers are stored 5 abreast and 2 or more high.

7th Street Public Container Terminal: Operator: Marine Terminals Corporation, 5190 7th Street, Oakland, Ca. 94607. Tel. (415) 839-6490.

Berths: Five. 3 container, 2 roll-on/roll-off and/or Combination break-bulk/container. Length 2,325 ft., water depth 35 ft. MLLW.

Container handling facilities: 3 Paceco low-profile, 40-ton container cranes; 1×140-ton Manitowac crawler crane; 3 truck scales; 96 refrigerated container outlets.

United States Lines Container Terminal: Operator: United States Lines, 1579 Middle Harbor Road, Oakland, Ca. 94607. Tel. (415) 465-4010.

Berths: 2, Length 1,443 ft., water depth 35 ft. MLLW.

Container-handling facilities: 2 Alliance low-profile, 51-ton container cranes, 1 crane modified for 125ft. outreach at 39 tons; 5 truck scales and outlets for 100 refrigerated containers. Container yard is chassis-type operation.

Outer Harbour Public Container Terminal: Berth 4 Operator: Marine Terminals Corporation, 909 Ferry Street, Oakland, Ca. 94607. Tel. (415) 839-6490.

Berths: 1. Length 750 ft., water depth 35 ft. MLLW. 50 Refrigerated container outlets, cranes available from adjoining container terminals.

American President Lines/Seatrain Container Terminal: Operator: American President Lines, Inc., 1395 Middle Harbor Road, Oakland, Ca. 94607. tel. (415) 271-8000.

Berths: 2. Length 1,300 ft., water depth 35 ft. MLLW.

Container handling facilities: 2 Alliance low-profile, 55 ton container cranes, 1 crane modified for 125 ft. outreach at 47 tons.; 3 truck scales; 108 refrigerated container outlets. Container yard is chassis-type operation.

Grove Street Terminal: Operator: Unassigned: Contact Port of Oakland for information. 3 berths, length 1,742 ft., depth 35 ft, at MLLW. Facilities: Break-bulk cargo operation utilising fork-lifts and tractors. Rail tracks alongside berths. Scheduled for modernisation by end of 1981. Combination Container/Break-bulk facilities.

9th Avenue Terminal: Operator; Marine Terminals Corporation, foot of 9th Avenue, Oakland, Ca. 94606. Tel. (415) 452-3742.

Berths: 3. Length 2,052 ft., depth 35 ft. at MLLW.

Facilities: Import steel and bulk cargo-handling centre. 2 Manitowac crawler cranes (capacity 150 and 100 tons). 2 Manitowac truck cranes (capacity 100 and 80 tons). Bulk-loading facilites with 10 steel storage silos capable of holding 9,750 cu.ft. each. Rail track alongside berth.

TANKERS: *Outer Harbour Terminal, Oil Pier:* Operators: Mobil Oil Co. and Ashland Oil Co. Length, 623 ft. (Lower Side) 683 ft. (Upper Side). 50 ft. (Face). Depth at MLLW. 33 ft. (Lower Side). 35 ft. (Upper Side). 36 ft. (Face).

Mobil Oil: Pipe-lines 4×10-in., 2×8-in., 3×6-in. and 1×4-in. 14 storage tanks, total capacity 522,100 barrels.

Ashland Oil: Pipe-lines 2×8-in., 3×6-in. 9 storage tanks, total capacity 142,300 barrels.

AUTHORITY: Port of Oakland.

AGENT: See "San Francisco".

OGDENSBURG, New York: 44.42 N. 75.30 W. (See Plan Book)

Refer to "St. Lawrence Seaway" for important general information.

PILOTAGE: Seaway Pilot boards at Cape Vincent or Snell Lock and acts as docking Pilot.

ANCHORAGE: Anchorage area West of city at open roadstead area.

RESTRICTIONS: No tide. No restrictions other than Pilots' discretion as to wind and visibility.

MAX. SIZE: Largest vessel to enter 600 ft. long. Draft 27 ft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany), Illness reports made to New York Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Western Union to OCN Corp. VHF Seaway Channel via Maria Radio Cardinal.

TUGS: No tugs necessary.

BRIDGES: Ogdensburg/Prescott International Bridge – 126 ft. clearance MWD.

BERTHING: By prior notice only. Port Authority Terminal, length 600 ft., depth 27 ft. One Grain Elevator capacity 500,000 bushels.

CRANES: Available, up to 82 tons capacity.

STEVEDORES: Order by 1800 hrs. day preceding arrival. Advise any change of ETA.

MEDICAL: Excellent medical service and availability of doctors. No vaccination necessary.

DENSITY: Fresh water.

FRESH WATER: Available by pipeline at Port Authority Terminal.

FUEL: One day's notice, all grades. Diesel, bunker "C", Kerosene.

GANGWAY/DECK WATCHMEN: Normally not used.

OPENING/CLOSING HATCHES: By stevedores.

CUSTOMS ALLOWANCES: Tobacco, wine/spirits, normal Customs allowance U.S. Ports.

CARGO GEAR: 25-ton mobile crane, fork trucks to 13 tons capacity. Ship's gear to be in good working order.

IDENTIFICATION CARDS: Needed as per Immigration department requirements.

REPAIRS: Limited dockside repairs available.

REPATRIATION: Can be arranged.

AIRPORT: (0.5 mile from city). Allegheny Airline – 3 flights daily to Syracuse, New York, etc.

TIME: 5 hours difference Eastern Standard Time. Daylight Saving time in Summer.

HOLIDAYS: New Year; Washington and Lincoln's Birthdays; Memorial Day; 4th July. Labour Day, Veteran's Day.

POLICE/AMBULANCE/FIRE: Police, 393–1551; Ambulance, 393–1221; fire, 393–1010.

TELEPHONES: Available at Pierside (315) 393–7580.

SHORE LEAVE: Crew members allowed ashore.

AUTHORITY: Ogdensburg Bridge and Port Authority.

OLYMPIA, Washington: 47.00 N. 122.53 W. (See Plan Book)

DOCUMENTS, PILOTAGE, etc.: Refer to "Tacoma".

ANCHORAGE: Good with muddy bottom found anywhere North of the channel entrance and the Olympia shoal.

MAX. SIZE: Olympia's turning basin is 800 ft. width; the pier, 2,000 ft. in length; depths in channel, 30 ft., and alongside pier, 35 ft.; both at MLLW. Depth at Berths No. 1 and 4, 35 ft. and at Nos. 2 and 3, 40 ft. MLLW.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: Tugs normally join vessels in outer channel, use ships lines and are primarily engaged for turning vessel in turning basin on entry.

STEVEDORES: Available.

FRESH WATER: Available.

FUEL: Available.

CARGO GEAR: Usual requirements only as good facilities are available.

REPAIRS: Most types of repairs undertaken.

AIRPORT: Located 4 miles South of Olympia, fronts on Interstate Highway 5. Operates twice daily service to and from Seattle and Portland.

TELEPHONES: Shipboard telephone service is provided.

SERVICES: Most services are available upon request.

SHORE LEAVE: Allowed.

AUTHORITY: Port of Olympia.

AGENT: See "Seattle".

ORANGE, Texas: 30.06 N. 93.44 W. (See Plan Book)

DOCUMENTS: Crew Lists, Passenger List and Customs Documents.

PILOTAGE: Radio to Agent, 12 hours and Pilots 2.5 hours in advance of ETA. Pilots contacted by VHF Channel 12 and 13. Pilots board at Sabine Pass, Sea buoy position 29° 36′ N., 93° 48′ W. or upon request board at 29° 25′ N., 93° 40′ W. Pilot boats FM (VHF) Channel 65 – 156.275 mc/s.

ANCHORAGE: Off Sabine bar – 40 ft.

RESTRICTIONS: Sabine River Channel: project depth 30 ft.; bottom width 200 ft., including slip at port; marked and lighted for 24-hour navigation. Turning basin, 1,000 ft.×3,000 ft.

MAX. SIZE: Length – no limit, breadth – no limit, draft – 30 ft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: RCA – Global Communications.

TUGS: Join vessel in port turning basin. Tug's line used, no charge.

BERTHING: 2,308 ft. mooring space to accommodate 4 deep-sea vessels; all concrete docks; additional berthing space in slip for laying-up 4 vessels.

STEVEDORES: 5 stevedore companies – handled through Agent.

MEDICAL: Local facilities – complete.

TANKERS: Limited to 30 ft. draft.

DENSITY: Brackish.

FRESH WATER: Ample fresh water, through 2.5 in. connection, rate of delivery about 500 gallons per minute.

FUEL: All grades available; 8 hours advance notice required.

FIRE PRECAUTIONS: No welding or burning without U.S. Coast Guard welding permit; also special authority required for ships loading explosives.

DEVELOPMENTS: Additional 37 acre tract on Sabine River for future development.

CONSULS: None available locally.

REPAIRS: Facilities available.

DRY DOCKS:

Levingston Shipyard – Orange.
400 ft.×126 ft. 11,000 tons, 17 ft. draft over blocks.
350 ft.×60 ft. 3,000 tons, 15 ft. draft over blocks.
250 ft.×72 ft. 3,000 tons, 11 ft. draft over blocks.

REPATRIATION: Can be arranged through area immigration.

AIRPORT: Local, no scheduled airlines. Mid County Airport with scheduled airline service – 30 miles.

HOLIDAYS: New Year's Day; Martin Luther King's Birthday; Lincoln's Birthday; Washington's Birthday; Texas Independence Day; St. Patrick's Day; Good Friday; Memorial Day; Emancipation Day; Independence Day; Labour Day; Columbus Day; Veterans Day; Thanksgiving Day; Christmas Day; Any holiday which falls on Saturday or Sunday will be recognized on the following Monday. No work performed on Labour Day or Christmas Day.

POLICE/AMBULANCE/FIRE: Police 883–5654; Ambulance 883–4333; Fire 886–7431.

TELEPHONE: Can be connected on board.

GENERAL: No strong tidal currents at the berths, excellent shelter during tropical storms.

AUTHORITY: Orange County Navigation and Port District.

OSTRICA, Louisiana: 29.22 N. 89.32 W.

East Bank of Mississippi river about 42 miles above S.W. Pass entrance.

DOCUMENTS/PILOTAGE: For all general information refer to "New Orleans".

ANCHORAGE: Available in river downstream of docks.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: Not normally required.

BERTHING: Gulf Refining Co. Terminal, tanker berth 45 ft. depth. 2×8-in. hoses loading 34,000 bbls. per hour. Ballast line 18 in. for slop discharge.

FRESH WATER: Not available.

FUEL: Bunker "C" available ex-wharf.

DENSITY: Fresh water (1000).

OSWEGO, New York: 43.28 N. 76.30 W.

(See Plan Book)

Oswego harbour is located on the South shore of Lake Ontario about 15 miles from its East end at the outlet to the Oswego River. It is the first major port on the Great Lakes off the seaway. It is also the Great Lakes entrance to the Great Lakes – Hudson River Waterway which connects with the Hudson River at Troy.

PILOTAGE: No requirements.

RESTRICTIONS: Average navigation season – April 1st to December 15th.

Approaches: Through entrance between the Arrowhead Breakwater pier heads and detached breakwater.

Entrance is 750 ft. wide with a depth of 25 ft. at LW datum.

Controlling depth of water 25 ft. at datum.

No Vessel length and beam limitations.

Approach open 24 hours a day.

Navigation lights available

Harbour: Controlling depth – front of each terminal open for public use. 21 ft. on West side. 28 ft. on East side.

Turning Basin – 115 acres.

Accessible 24 hours per day.

No Vessel length and beam limitations.

HEALTH/AGRICULTURE: See "Health" and "Agriculture" before first U.S.A. port (Albany).

TUGS: Towage facilities available on request.

BERTHING: The general cargo facilities are operated by the Port of Oswego Authority. The West Side Facility is a finger pier 1,000 ft. long providing 4 berths and has 21 ft. of water alongside at LW datum. 28,000 sq. ft. of covered storage is available with limited open storage. A million bushel grain elevator is situated on this pier. The East Side Facility is a marginal wharf 1,900 ft. long, providing 3 berths and has 27 ft. of water alongside at LW datum. 134,000 sq.ft. of covered storage is available with unlimited open storage.

Oswego exports general cargo. It imports grain cement, wood pulp, petroleum and general cargo.

New Marginal Wharf: Length of berth 1,750 ft. Depth 25 ft at LW datum.

BRIDGES: None.

CRANES: Mobile heavy lift equipment available.

BULK HANDLING FACILITIES: One 1,000,000 bushel capacity elevator equipped with 3 loading spouts, 2 Marine legs and 2 car pits.

FRESH WATER: Available at all general cargo docks.

FUEL: Seaway Terminal of Metropolitan Petroleum Corporation, 4 tanks – Capacity 327,000 barrels of No. 2 and No. 6 oil. Coal bunkerage available by truck delivery.

CONSULS: None.

REPAIRS: Above waterline repairs available.

AUTHORITY: Port of Oswego Authority.

PALM BEACH, Florida: 26.46 N. 80.03 W.

(See Plan Book)

LOCATION: Port is located on a salt water sound known as Lake Worth and lies 1.3 miles from the 37 ft. contour of the Atlantic Ocean to which it is connected by an artificial cut at the North end of Lake Worth known as Lake Worth Inlet. The Inlet is located within the boundaries of the City of Riviera Beach, Florida.

PORT LIMITS: Sea buoy at channel entrance. Dockage charges commence when vessel is made fast to wharf, and are on a 24 hour basis or fraction thereof.

DOCUMENTS: See "Jacksonville". All vessels shall, upon arrival, report to Port Director all cargo to be discharged. Such report shall be in form of copies of Ship's Manifest, or certified statements, and shall show number of units, commodity, weight, destination, consignee, and all other information which port of Palm Beach deems necessary for compilation of commercial statistics, for reserving of necessary warehouse or wharf space, or other purposes.

All vessels shall, before sailing, report to the Port Director all cargo loaded into such vessels. Such reports shall be in the form of copies of the ship's manifest, or certified statements, and shall show numbers of units, commodities, and all other information which the port of Palm Beach deems necessary for compilation of commercial statistics, or other purposes.

PILOTAGE: Compulsory. Provided by Pilots' Association of the port of Palm Beach, 130 East Port Road, Riviera Beach, Florida, 33404.

CHANNEL: Entrance to the harbour is by a dog-leg channel running due West through the jetties and then turning South-westerly to the terminals. The channel is 400 ft. wide, narrowing to 300 ft. in width as it continues across the lake another 3,000 ft., leading into a trapezoidal turning basin, 1,400 ft. by 1,310 ft. adjacent to the port terminals on the West shore, with an extension of 672 ft. at 25 ft. depth to the New North Wharf and Loading Ramps. Present depth of entrance channel is 35 ft. at MLW.

ANCHORAGE: Anchorage is designated by the Bar Pilots, which in most instances is at sea. Port has no established anchorage.

MAX. SIZE: Vessels up to 620 ft. in length with draft of 34 ft. have used facilities.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Miami Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Port has no communication equipment. U.S. Coast Guard Station, Peanut Island, Riviera Beach, Florida, can be reached on 2182 kHz – 2678 kHz – 156.8 mHz. Pilots VHF Channel 16.

TUGS: Available to assist berthing. Service is provided by the Port Towing Corporation, PO Box 12425, Lake Park, Florida 33403. Office Tel. 622-6422 and 622-8688, nights and holidays 844-4244.

BERTHING: 2 slips and 4 marginal wharves with 6 ramps including a 14 acre container facility.

Berth		Length (ft.)	Depth (ft.)
No. 1	South Marginal	190	25
No. 2	East Half, South Side of Slip 2	325	35
No. 3	West Half, South Side of Slip 2	325	35
No. 4	West End of Slip 2	225	35
No. 5	West Half, North Side of Slip 2	325	35
No. 6	East Half, North Side of Slip 2	325	35
No. 7	Middle Marginal	150	25
No. 8	East Half, South Side of Slip 1	345	25
No. 9	West Half, South Side of Slip 1	345	25
No. 10	South Ramp, West End of Slip 1	40	25
No. 11	Middle Ramp, West End of Slip 1	40	25
No. 12	North Ramp, West End of Slip 1	40	25
No. 13	West Half, North Side of Slip 1	345	25
No. 14	East Half, North Side of Slip 1	345	25
No. 15	South Section, North Marginal	204	27
No. 16	Mid-Section, North Marginal	204	27
No. 17	North Section, North Marginal	204	27
No. 18	East Section, South Side	150	25
No. 19	West Section, South Side	150	25
No. 20	South Ramp	67	25
No. 21	Middle Ramp	67	25
No. 22	North Ramp	67	25
No. 23	North Side Container Wharf	82	25
No. 24	South Half Container Wharf	236	25
No. 25	North Half Container Wharf	236	25

Supplementing the berths are 157,400 sq.ft. of warehousing space. Open storage area is within easy reach of all berths.

All vessels, their Owners or Agents, desiring a berth at wharves, shall, as far in advance of date of docking as possible, make application to port specifying date of docking, sailing, nature and quantity of cargo to be handled, and name of the vessel.

SPECIALISED CARGO HANDLING FACILITIES: Ramps for roll-on/roll-off cargo and wharfside accommodation for equipment to handle containerised cargo only.

STEVEDORES: The recognised working hours of port shall be from 0800 until 1200 hrs. and from 1300 until 1700 hrs., Monday through Friday, holidays excepted. During the recognised working hours services will be charged for on a straight time basis.

When vessels are loading or discharging cargo the port may furnish checker-foremen to supervise release of cargo being loaded and/or check cargo being discharged. The charge for each man furnished will be based on labour-furnished rates for foremen, with the Port reserving right to furnish as many men as they deem necessary to protect their interests. Charges for this service will be rendered against the vessels, their Owners, or Agents.

TANKERS: The port receives tankers each month in the 15 to 18 thousand gross ton limit.

FRESH WATER: Fresh water delivered to vessels at wharves or docks.

FIRE PRECAUTIONS: Smoking is strictly prohibited in transit sheds, warehouses, or on apron of wharves and on vessels, handling dangerous, hazardous, or inflammable cargo. Smoking is also strictly prohibited in any areas where gasoline or like materials are being handled or serviced to equipment.

Explosives and hazardous or highly inflammable commodities or materials may be handled over, or received on, the wharves or other facilities of port of Palm Beach by special arrangements with and at the option of the Port Director, and the receiving, handling, or storage of such commodities shall be subject to Federal and State laws, rules and regulations.

In all cases where explosives and hazardous or highly inflammable commodities or materials are to be handled, prior consent by the U.S. Coast Guard must be received and a copy of the consent filed with the Port Director. Responsibility for safeguarding of life and property will be the duty of the shipper. Proof of sufficient liability insurance must be presented to Port Director prior to arrival of such materials.

CONSULS: Barbados and Monaco.

DEVELOPMENTS: New 14 acre container marshalling area has been recently completed. New raw sugar storage facility at Slip 2 is under construction for completion in late 1978.

CARGO GEAR: Crane capacity can accommodate single lifts up to 300 tons. Also available are 2×150-ton cranes, 1×200-ton crane, 1×65-ton crane and 1×40-ton crane also 1×23-ton fork lift.

HOLIDAYS: New Year's Day; Washington's Birthday; Columbus Day; Decoration (Memorial) Day; Independence Day; Labour Day; Veteran's (Armistice) Day; Thanksgiving Day; Christmas Day. When any one of these falls on Sunday, the following Monday is observed as a holiday. When any one of these falls on Saturday, the preceding Friday is observed.

GENERAL: Marine terminal 1.3 miles from the open sea, served by U.S. Highway 1 and is directly connected by port-owned belt-line railroad to the Florida Coast Railway.

Broad aprons (80 ft.) with ship-side rail, and warehouses backed by open storage areas. The slips and wharves are located on a salt water sound, fully protected from the sea by barrier islands; departures from the slips average only 15 minutes through inlet to open sea.

AUTHORITY: Port of Palm Beach.

PANAMA CITY, Florida: 30.10 N. 85.40 W.
(See Plan Book)

DOCUMENTS:

2 Passenger Lists.
2 Crew Lists.
2 Curio Lists.
2 Stores Lists.
Register.
Load-line Certificate.
Tonnage Tax Certificate.

PILOTAGE: Compulsory. Pilots board at sea-buoy. Guard Channel 16 VHF. Safe anchorage at sea-buoy if waiting for Pilot. Pilot boat black hull with white lettering.

ANCHORAGE: Several safe anchorages inside bay with 32 or more ft. depth.

RESTRICTIONS: Maximum safe draft over bar is 32 ft. No other restrictions except in case of bad weather.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Preferably WLO Radio, Mobile, Alabama, U.S.A. Also good service from RCA. Vessel should radio ETA and cash requirements.

TUGS: 3 tugs available. Tug is used only to assist in berthing. Always uses ship's lines.

BERTHING: Any time, except for unusual weather. Good safe port. Berths are about 1 hour from Pilot station.

STEVEDORES: Must have ETA by 1500 hrs. local time in order commence loading 0800 hrs. next day. Normal work day 0800–1200 hrs., then from 1300–1700 hrs., Monday through Friday.

MEDICAL: Medical and hospital service available.

TANKERS: No slop discharge facilities. 1 tanker berth – 29 ft. max. draft.

DENSITY: Salt water. 1.5 ft. tide range.

FRESH WATER: Available all berths but ships must supply hose.

FUEL: Only on advance notice – limited supplies.

GANGWAY/DECK WATCHMEN: Only if required by ship's Owners or Master.

OPENING/CLOSING HATCHES: Normally done by stevedores. In some cases, is done by ship's crew.

CUSTOMS ALLOWANCES: Tobacco, 1 carton 200 cigarettes. Wine/Spirits, reasonable quantity – 1 or 2 bottles.

CARGO GEAR: Must show safety inspection if requested.

IDENTIFICATION CARDS: All crew must have U.S. Immigration Landing Permit.

CONSULS: None.

REPAIRS: Limited deck and engine repairs can be effected.

REPATRIATION: Available.

AIRPORT: Approximately 4 miles from port. Served by 2 scheduled air lines.

TIME: Central Standard Time (GMT minus 6 hours or 90° Meridian). Central Daylight time in Summer (minus five or 75° Meridian time).

HOLIDAYS: No work holidays: New Year's Day; Easter; 4th July; Labour Day; Christmas Day; Working holidays; Lincoln's Birthday (February 12); George Washington's Birthday (Third Monday in February); Memorial Day (Last Monday in May); Veterans Day (Fourth Monday in October); Fall Festival Day, Thanksgiving Day (Fourth Thursday in November).

POLICE/AMBULANCE/FIRE: Dial operator, or 785-6161.

TELEPHONES: Placed aboard only by very special arrangement – not normally available.

SERVICES: Most repairs to radio, radar and other such equipment. Advance notice required.

SHORE LEAVE: Any time – any berth.

DELAYS: Normally, delays infrequent and for short durations.

AUTHORITY: Panama City Ports Authority.

PASADENA, Texas: 29.43 N. 95.13 W.
Refer to "Houston" for all general information.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

PASCAGOULA, Mississippi: 30.21 N. 88.34 W.
(See Plan Book)

PORT LIMITS: Subject to Charter-Party Terms, an "arrived ship", subject to jurisdiction of the Port Authority, occurs when a ship arrives at Horn Island Sea Buoy.

DOCUMENTS: See "New Orleans".

PILOTAGE: Compulsory. Pascagoula Bar Pilots' Association ((601)–762–1151). Pilot boat to be contacted on VHF Channel 16, pilot boat has black hull with white house, International light and sound signals to be made by vessel requiring a Pilot. Pilot to be taken aboard vessel in vicinity of Horn Island sea buoy. Usual safety measures are required, with respect to boarding. Vessels may anchor in this area while awaiting Pilot, there is a 35 to 50 ft. depth with good holding bottom.

ANCHORAGES: Only anchorages permitted are in vicinity of Horn Island Sea Buoy or seaward.

RESTRICTIONS: Under normal conditions there are no entry restrictions as to time or state of tide.

From Horn Island Sea Buoy to Horn Island Pass the channel is 350 ft. wide by 40 ft. deep; from Horn Island Pass to Pascagoula River Turning Basin the channel is 350 ft. wide and 38 ft. deep; the Pascagoula River Turning Basin is 950 ft. wide and 38 ft. deep.

Channel into Bayou Casotte (East Harbour) from Junction Buoy to mouth of Bayou Casotte Harbour is 225 ft. by 38 ft. deep; thence at inner harbour channel is 300 ft. wide and 38 ft. deep into the Bayou Casotte Turning Basin; the Bayou Casotte Turning Basin is 940 ft. wide and 39 ft. deep. All dimensions listed are project dimensions; depths refer to MLW datum.

No vessel or tow shall enter Bayou Casotte Channel outbound after a seagoing vessel or tow has passed Buoy 30 inbound, and; no vessel or tow shall enter Bayou Casotte Channel inbound after a seagoing vessel or tow has passed Buoy 11 outbound. Vessels or tows which are at a dock should remain at the dock until the inbound seagoing vessel or tow has passed, or until it has reached its berth, whichever occurs first.

MAX. SIZE: Length of vessel is restricted to approx. 900 ft. by turning basin, no breadth restriction, draft 38 ft. at MLW. Normal tidal range 1.6 ft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Mobile Marine operator, Station WLO best for vessels to route ETA cables to Agent. Also, TRT Telecommunications, New Orleans (WNU) as WLO is closed from approximately 2230 to 0630 hrs.

RADAR/VHF: Radar and VHF radio on pilot boat, Channel 16.

Every vessel shall, when entering the Horn Island Pass Channel, and the Bayou Casotte Channel, or when getting underway from a berth, or when approaching the Pascagoula Channel while transitting the Intracoastal Waterway:

(a) Maintain a radio watch on VHF–FM Channels 13 and 16 in accordance with Vessel Bridge to Bridge Telephone Regulations of January 1st, 1973.

(b) Check on other traffic operating in the area by transmitting on Channel 16:

"SECURITY, SECURITY, SECURITY
THIS IS.......................................(Vessel Calling)
ENTERING...
CHANNEL PROCEEDING FROM
..................TO...
CHECKING FOR TRAFFIC, STANDING
BY ON CHANNELS 13 and 16,.....................
(Vessel Calling) .... OUT"

If other traffic replies, utilize Channel 13 for exchange of information relative to safe navigation.

TUGS: Tugs will join vessels in harbour or off docks. No escort required.

BRIDGES: None affecting 38 ft. channels.

2 bridges across the Pascagoula River above the turning basin, not passed through between channel and harbour.

BERTHING: Private and public berths are available, by prior arrangement, in both the Pascagoula River Harbour (West Harbour) and the Bayou Casotte Harbour (East Harbour).

West Harbour – Public: Grain Elevator, 3,100,000 bushel capacity, 900 ft. berth at 780 ft. wharf and 38 ft. deep.

Terminal 'A' with transit shed, 500 ft. wharf and 38 ft. deep.
Terminal 'B' with transit shed, 544 ft. wharf and 38 ft. deep.
South Clusters, 1 ship berth approximately 600 ft. by 24 ft. deep.

West Harbour – Private – Ingalls Shipbuilding: Note. These berths are normally occupied with ships being outfitted and are not normally available.

West Bank Shipyard, 4,410 ft. bulkhead, 5 berths by 38 ft. deep.
East Bank Shipyard, three 600 ft. piers, one 800 ft. pier, each 32 ft. deep.

East Harbour – Public:

Terminal 'E' with transit shed, 517 ft. wharf by 38 ft. deep;
Terminal 'F' with transit shed, 737 ft. wharf by 38 ft. deep;
Terminal 'G' with transit shed, 516 ft. wharf by 38 ft. deep;
Terminal 'H' with transit shed, 556 ft. wharf by 38 ft. deep.

East Harbour – Private: Corchem/Corhart, 550 ft. wharf by 24 ft. deep;

Chevron U.S.A. Inc., Wharf No. 1, 5 berths by 38 ft. deep;
Chevron U.S.A. Inc., Wharf No. 2, 1 berth by 38 ft. deep;
Mississippi Chemical Company, 2 loading docks each 475 ft. by 34 ft. depth;
Chicago Bridge & Iron Company, slip 900 ft. by 16 ft. deep.

SPECIALIZED CARGO HANDLING: Chevron U.S.A. Inc., Wharf No. 1 has facilities for handling acid, caustic, ammonia, and LPG, in addition to petroleum products.

Mississippi Chemical Company loading docks are equipped for handling phosphate rock and other bulk materials, liquid and dry.

Terminals E & F are equipped for exporting bulk ores.

CRANES: The Port has a heavy lift capability of 400 tons by an arrangement with Ingalls West Bank Facility. Truck cranes with capacity up to 110 tons, also available in the port area.

STEVEDORES: 12 hours notice requested to arrange stevedore gangs.
Straight Time: 0800 hrs. – 1200 hrs. and 1300 hrs. – 1700 hrs. Mondays through Fridays except Holidays. All other hours and days are overtime.
MEDICAL: Agents to be advised if immediate medical attention is required. Free pratique granted except in case of communicable diseases aboard, inoculations required by Public Health Service, etc. Doctors and hospital services readily available.
TANKERS: Chevron U.S.A. Inc. owns and operates 3 wharves on East side of Bayou Cosotte harbour. Facilities have 6, 8 and 12 in. lines with adaptors, discharge tanks with a capacity of 60,000 tons, 3 tanker berths with a 38 ft. draft. Wharf No. 2 for receiving crude oil from large tankers. Wharf designed and built for 50 ft. draft, but presently limited to 38 ft. draft on account of channel and seaward.
DENSITY: Density varies with the state of tide and wind, from fresh to salt water.
FRESH WATER: Potable water is available at most berths. Water at public terminals can be delivered at flow rate of 50 g.p.m.
FUEL: Large vessels are bunkered at berth in the harbour by 2 tank barges, operated by Fuel Services, Inc. All grades fuel are available.
FIRE PRECAUTIONS: Usual safety precautions required. Verify unusual procedures for approval of U.S. Coast Guard.
GANGWAY/DECK WATCHMEN: Port guards are furnished for the general cargo terminals at the port's expense. At least 1 person must be on duty aboard vessel.
HATCHES: Opening/closing hatches by the crew is at the discretion of the ship.
CUSTOMS ALLOWANCE: Each Crew member is allowed either 300 cigarettes or 50 cigars or 3 lbs. of tobacco. In addition, each member is allowed 1 quart of alcoholic spirits as regulated by provisions of the Mississippi Alcoholic Beverage Commission rules.
CARGO GEAR: No requirements for cargo gear other than it be certified by a recognised International organisation.
CONSULS: Many countries have consuls within a 100-mile radius of Pascagoula. (Mobile and New Orleans).
REPAIRS: Most deck and engine repairs could be arranged within port facilities.
DRY DOCKS: Ingalls Shipbuilding Corporation, West Bank Shipyard, has 1 launch pontoon (dry dock) with 38,000 ton capacity.
Ingalls Shipbuilding Corporation, East Bank Shipyard, has 1 graving dock, 485 ft. inside length, 75 ft. wide gate, 34 ft. deep, with loading capacity of 1 ton per sq. ft.
Walker Shipyard has one 800 ton dry dock.
Flechas Shipyard has one 600 ton dry dock.
There are several marineways in vicinity, capacities 50–100 tons.
SURVEYORS: Licensed Marine Surveyors are available in Port.
REPATRIATION: The City of Pascagoula is served by regularly scheduled transporation. Vessel's Agent to arrange clearance with Customs and Immigration officials.
AIRPORT: An airport is available approx. 35 miles from the city and is served by regularly scheduled airlines.
TIME: The port of Pascagoula is on Central Standard Time, GMT minus 6 hours; clocks are moved ahead 1 hour during Summer months. (Last Sunday in April to last Sunday in October).
HOLIDAYS: New Year's Day (January 1st); King's Birthday (January 15th); Washington's Birthday (3rd Monday in February); Mardi Gras (41 days before Easter – Tues.); *Easter Sunday/Easter Monday (1st Sunday after 1st full moon after March 21st); King's Memorial Day (April 4th); Memorial Day (Last Monday in May); *Independence Day (July 4th); *Labour Day (1st Monday in September); Veterans' Day (4th Monday in October); Thanksgiving Day (Last Thursday in November); *Christmas Eve (December 24th); *Christmas Day (December 25th); *New Year's Eve (December 31st).
(*Non-working). Non-working holidays are observed from midnight of the holiday through to 0700 hrs. of the following day with the exception of Christmas Eve and New Year's Eve when the non-working portion of the holiday commences at noon.
Should any of the above holidays except Easter, Christmas Eve, and New Year's Eve fall on a Sunday the following Monday will be observed.
Elevator employees observe Martin Luther King's Memorial Day instead of Birthday.
Saturday shall not be considered as a layday in determining time ships are in berth in this harbour.
POLICE/FIRE/AMBULANCE: Telephone numbers for emergency services are: Fire 762–1133; Police 762–2211; Ambulance 762–6332. Universal emergency No. 911.
TELEPHONES: Telephones can be installed aboard vessels at a nominal charge.
SERVICES: Facilities are available for compass adjusting. Tank cleaning and receipt of tank washings can be arranged by contract services available in the area.
SHORE LEAVE: Allowed for any Crew member not detained by Immigration Office.
IDENTIFICATION CARDS: Standard Immigration Form 1-95 to be made up for each Crew member on arrival. Not necessary for crewmen already holding Form 1-95 issued for the same vessel.
DEVELOPMENTS: A dry bulk handling facility with a 3,000–6,000 t.p.h. loading capacity, scheduled for operation during 1978, built South of the Corchem, Inc. plant.
DELAYS: Berths at Public Terminals and the South Clusters are assigned by the Traffic Manager of the Jackson County Port Authority. Berths at private docks are assigned by the respective owners. No exceptions to this are allowed. Berth at Grain elevator is assigned by the Lessee-Operator, the Louis Dreyfus Corporation. No delays are encountered by following this procedure, emergencies excepted.
GENERAL: Some difficulty encountered by unscheduled tows who use harbour for shelter in inclement weather. Pilot Association aware of current situations. Study of traffic control system is being undertaken by the Port Authority, particularly considering hazards of tankers in Bayou Casotte 225 ft. wide channel. Ample barge storage is available in Barge Fleeting Area South of Ingalls Westbank Shipyard – capacity is 96 barges, operated by Colle Towing Company.
AUTHORITY: Jackson County Port Authority.

PENSACOLA, Florida: 30.25 N. 87.13 W.

(See Plan Book)

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
BERTHING:

Berth Number	*Length (ft.)*	*Depth at MLW (ft.)*	*Use*
No. 2	400	35	General Cargo
No. 3	425	35	General Cargo and Lumber
No. 5	425	35	General Cargo
No. 6	580	35	General Cargo

BULK HANDLING FACILITIES: No. 1 Berth. Length 600 ft. Depth at MLW 35 ft. Discharge of bulk materials by conveyor, rate 400 t.p.h.
No. 1 Berth is also used for the discharge of oil, creosote oil and liquid chemicals into private facilities.
FRESH WATER: Available.
AUTHORITY: Port of Pensacola, Department of Transportation.

PETERSBURG, Alaska: 56.49 N. 132.57 W.

Located on Mitkof Island, Northern end of Wrangell Narrows. Open all year.
DOCUMENTS: See "Anchorage, Alaska".
PILOTAGE: (From sea via Dixon Entrance up Clarence Strait to Guard Island.) Under pilotage from Guard Island.
MAX. SIZE: Harbour depth 24 ft. MLLW. Tides: diurnal range 15.7 ft. Also see "Berthing".
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
ANCHORAGE: Good anchorage in Scow Bay, mud bottom.
CUSTOMS: Immigration, Guard Island. Quarantine and Customs, local.
TUGS: One 320 h.p.
BERTHING: Pacific American Fisheries Inc.: 75 ft. long, 65 ft. wide. Should dock at slack water. Strong current.
STEVEDORES: 1 gang.
REPAIRS: Marine Ways to 35 tons.
WATER: State approved water available.
FUEL: Diesel and Gasoline available.
MEDICAL: 21 bed hospital.
TRANSPORTATION: Scheduled and charter airlines and ferry.
AUTHORITY: City of Petersburg.

PHILADELPHIA, Pa.: 39.57 N. 75.10 W.

(See Plan Book)

DOCUMENTS:
3 Crew Lists Form I.418 (suggest 6 be made).
3 Passenger Lists Form I.418 (suggest 6 be made).
3 Customs Stores Lists (suggest 6 be made).
3 Curio Lists (own ship Form) (suggest 6 be made).
3 Narcotics Lists (own ship Form) (suggest 6 be made).
Manifest (Ship Cargo List). If Philadelphia first port of call, require 1 copy for Customs and 1 copy to be used as "traveller" surrendered last port of call. If Philadelphia not first port of call, required 2 copies, all cargo to be discharged at Philadelphia.
For Immigration Service:
Visaed Crew List.
Valid passport or Seaman's Book for each person on board.
Crewman's landing card (Form I.95) for each crew member.
PILOTAGE: Pilotage is provided by members of the Pilots' Association for the Bay and River Delaware who maintain a shore station and operations tower at Cape Henlopen. The Pilot Station is in operation on a 24 hour basis and guards VHF Channels 16 and 14. Telegraphic address is: DELPILOTS, 214 S. Eleventh Street, Philadelphia, Pa. 19107. Arrangements for Pilot may be made by the local Agent although an ETA and draft either by cable or VHF radio will be greatly appreciated and will facilitate prompt boarding on arrival. The Pilot boarding area is inside a line between Entrance Buoys No. 5 and 6, or approximately 2 to 2.5 miles S.E. of Harbour of Refuge Lighthouse. Pilots may board further off-shore upon special request.

Large and deep draft vessels awaiting berth are encouraged to avail themselves of the deep water anchorage adjacent to the Breakwater near the Pilot Station. There are 13 anchorage areas available along the Delaware for moderate size vessels of lesser draft.

RESTRICTIONS: There are no restrictions imposed upon entry except those dictated by vessel draft. Throughout most of its length, the Delaware river is dredged to 40 ft. at MLW. In addition there is a mean tidal range of about 5.7 ft. Vessels of 38 ft. 06 in. salt water draft can safely transit the river on a rising tide.
MAX. SIZE: Deep-draft oil carriers are lightered in a special anchorage approximately 10 miles N.W. of the Pilot Station. Vessels are restricted to a max. draft of 55 ft. by Federal Law.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Philadelphia Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: RCA Global Communication. "WSC" Tuckerton, N.J.
TUGS: Tugs normally join vessels adjacent to berth. Ship's lines are used.
BERTHING:

Northern Metal Co. Terminal	9 berths depth 25 ft. to 32 ft.
Tioga Terminal	7 ,, 40 ft.
Delaware River Terminal	4 ,, ,, 29 ft. to 32 ft.
Port Richmond	10 piers depth alongside 26 ft. to 36 ft.
Delaware River	21 ,, ,, ,, 26 ft. ,, 35 ft.
Greenwich Point Tidewater Ore Terminal	2 berths 850 ft. length, depth 37 ft. to 42 ft.
Girard Point	3 piers depth alongside 28 ft. to 36 ft.
Camden	3 ,, ,, ,, 30 ft. ,, 40 ft.
Gloucester	Ore Pier, depth alongside 25 ft. and 31 ft.

Packer Avenue Terminal, 5 berths, depth alongside 35 ft.
Port of Wilmington, 5 berths, depth alongside 35 ft.

CONTAINER HANDLING FACILITIES: *Tioga Marine Terminal:* Handles containerised and roll-on/roll-off cargoes. The terminal is equipped with 2 container cranes and a 300-ton mobile crane. Length of the marginal wharf is 3,300 ft., upper slip berth 725 ft. and lower slip berth 625 ft.

Packer Avenue Marine Terminal: Handles containerised and roll-on/roll-off cargoes. The terminal is equipped with 2 container cranes. The marginal wharf is 3,200 ft. in length and the roll-on/roll-off slip berth is 825 ft. in length.
STEVEDORES: Ship's Agents make arrangements for stevedore gangs. Agents should be kept advised of any change in ETA.
MEDICAL: Advance notice of requirements desirable to the extent possible. Hospital facilities are available. Smallpox vaccination certificate required (see Quarantine Declaration Form).
TANKERS: There are 83 petroleum handling berths along the Delaware River. All terminals are equipped with reducers. There are slop (residue) facilities at most terminals. Some main terminals listed below:

Fort Mifflin	Atlantic-Richfield	40 ft. depth
Point Breeze	Atlantic Richfield	32 ,, ,,
	Ballast Wharf	32 ,, ,,
Hog Island	Gulf Oil Terminal	40 ,, ,,
Paulsboro	Mobil Oil Terminal	30 ft and 40 ft. depth
	Patterson Oil Terminal	36 ft. depth
Marcus Hook	Sinclair Refining Co.	35 ,, ,,
	Sun Oil co.	33 ,, ,,
Westville (Eagle Point)	Texas Oil Terminal	40 ,, ,,
Pennsauken	Greater Valley Oil Co.	34 ,, ,,
Girard Point	Gulf Oil Co.	33 ,, ,,
Delair	Hess Oil Co.	31 ,, ,,

DENSITY: Philadelphia ports are fresh-water ports.
FRESH WATER: Fresh water normally not available directly at berth. Fresh water available by tank truck or through fire Department. No water barges available.
FUEL: Bunker C and diesel fuel available most oil terminals. Vessel's Agent should confirm berthing space at least 24 hours in advance.
GANGWAY/DECK WATCHMEN: These services are left to the discretion of the Master. It is often recommended by ship's P & I club that watchmen be engaged when seamen are detained by U.S. Immigration. Ship is subject to have fines by U.S. Government if any detained seaman deserts vessel.
OPENING/CLOSING HATCHES: Normally opened/closed by stevedores.
CERTIFICATES: Ship's Register and Load-line Certificate are mandatory. If vessel is carrying passengers from the U.S. they will require a U.S. Coast Guard Certificate. This can easily be obtained in about 1 or 2 days subject to meeting the requirement for life-saving equipment.
CUSTOMS ALLOWANCES: No set rule. Reasonable amount allowed for personal use.
CARGO GEAR: For exceptionally heavy lifts, Philadelphia Naval Shipyard has a 350-ton crane. Special permission is required to use this machine when there are no commercial facilities available.
CONSULS: The following countries are represented in Philadelphia:

Belgium
Brazil
Canada
Chile
Colombia
Costa Rica
Denmark
Ecuador
Germany
Great Britain
Guatemala
Haiti
Honduras
Iceland
Israel
Italy
Japan
Liberia
Mexico
Netherlands
Norway
Panama
Paraguay
Peru
Portugal
Sweden
Switzerland
Thailand
Uruguay
Venezuela

REPAIRS: All types of ship repairs can be effected.
AIRPORT: Philadelphia International Airport is located approximately 6 miles from central harbour area.
TIME: Standard time GMT minus 5. Daylight Saving Time (minus 4) is usually implemented about the last week-end in April.
HOLIDAYS: New Year's Day (1st January); Lincoln's Birthday (12th February); Washington's Birthday (22nd February); Good Friday; Decoration Day (May 30th); Flag Day (14th June); Independence Day (4th July); Labour Day (1st Monday in September); Colombus Day (12th October); November Election Day (1st Tuesday in November); Armistice or Veteran's Day (11th November); Thanksgiving Day; Christmas Day; and any other national holiday as may be provided by executive authority.
POLICE/FIRE/AMBULANCE: Fire LO 3–6700; Police 231–3131; Port Disaster 609–WO 3–6420, WA 5–8780.
GENERAL: If garbage removal is required while in port, it must be done under supervision of the plant quarantine service.
AUTHORITY: Delaware River Port Authority.

PINEY POINT, Maryland: 38.08 N. 76.32 W.

(See Plan Book)

Steuart Petroleum Company Terminal on East bank of Potomac River, 82 miles from sea.
DOCUMENTS/PILOTAGE: Refer to "Baltimore".
ANCHORAGE: Unlimited, available in Chesapeake Bay.
RESTRICTIONS: Berthing 24 hours a day with max. draft of 38 ft. Vessels exceeding 725 ft. or 37 ft. draft, 2 tugs required docking – 1 sailing. Vessels under, 1 tug docking, none sailing.
MAX. SIZE: Limited by depth at berth, 38 ft.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Baltimore Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: WMH Baltimore Radio. VHF channel 26.
TUGS: 2 tugs available for berthing, join vessel off berth.
BERTHING: 1 tanker berth only. Long lines required for first ashore.
FRESH WATER: Available at berth.
FUEL: Bunker "C" only, available ex-berth.
GENERAL: Nearest city with full services is Washington, 65 miles distance.
AIRPORT: Washington National or Baltimore-Washington.
TIME: GMT minus 6 hours.
SHORE LEAVE: Allowed.
AUTHORITY: Maryland Ports Administration.

PORT ADAMS, Texas: 29.45 N. 95.11 W.

Refer to "Houston" for all general information.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

PORT ANGELES, Washington: 48.08 N. 123.25 W.

DOCUMENTS, etc.: Refer to "Tacoma".
PILOTAGE: Compulsory for all vessels except those in coasting trade. Pilot station at Ediz Hook serves all vessels bound for Puget Sound ports. Pilot boards off Port Angeles.
ANCHORAGE: In harbour, depth at least 42 ft. MLLW.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
BERTHING: 4 principal wharves, depth alongside 28-38 ft. MLLW.
STEVEDORES: 8 local gangs, additional gangs may be imported if required.
HOLIDAYS: See "Tacoma".
MEDICAL: All medical facilities available. Local hospital.
DENSITY: Salt water.
FRESH WATER: Available at all wharves.
FUEL: Barge delivery only.
GANGWAY/DECK WATCHMEN: Required only if detainees aboard.
CUSTOMS ALLOWANCE: No definite quantities specified; reasonable allowance at discretion of Custom's Inspector.
AGENT: See "Seattle".

PORT ARTHUR, Texas: 29.53 N. 93.57 W.

(See Plan Book)

DOCUMENTS:
Entrance Direct from a Foreign Port:
Master's Oath on entry on vessel in Foreign trade, Customs Form 1300 (2 copies).
General Declaration, Customs Form 1301 (2 copies).
Ship's Stores Declaration, Customs Form 1303 (2 copies).
Crew Effects Declaration, Customs Form 1304 (2 copies).
Clearance from last Port.
Inward Foreign Manifest, Customs Form 7527-B (2 copies)
Passenger/Crew List. Form 418 (3 copies).

In event import cargo is onboard, an additional copy of each of the above Forms is required for travelling Manifest. A copy of the Manifest for each port is also required.

Entrance from Domestic Port:

Clearance from Last Port.
Crew Effect Declaration, Customs Form 1304 (2 copies).
Stores List, Customs Form 1303 (2 copies).
Crew List, Customs Form 418 (2 copies).
Master's Oath, Customs Form 1300 (2 copies).
General Declaration, Customs Form 1301 (2 copies).

PILOTAGE: Come up in vicinity of the sea buoy. 24 hours notice of ETA should be given and revised if ship is delayed 1 hour or more. Telegraphic address is "Sabine Pilots, Port Arthur, Texas". Pilot station keeps 24 hour continuous watch on VHF Channel 12 – 156.6 mc/s. and on 2738 kc/s. Pilot boat is motor vessel with black hull, white housing flying Pilot insignia by day and Pilot light by night. Location of Pilot boat is in general vicinity of Sabine Pass sea buoy. Pilot ladder only on lee side of vessel.

Pilot will, upon request and at extra cost, board incoming vessels at buoy marked "SB" in position 29° 25′ N. 93° 40′ W.

RESTRICTIONS: The Port Arthur ship channel is in operation 24 hours per day. The only restrictions that might hamper vessel traffic would be the draft of the vessel (Port will be able to handle vessels taking up to 40 ft. of water) or extremely bad weather conditions such as fog or high winds. Also, vessels of the 85,000 ton or more class can only be moved during daylight hours.

MAX. SIZE: Port Arthur ship channel will be authorised to 40 ft. in depth and will vary from 400 to 800 ft. in width. Turning basin, which is located at mile 19 (only about 0.5 miles upstream from existing port facility) is 900 ft. in width. Bulk carriers going to grain elevator at Port Arthur or to one of the oil refineries would only be restricted by draft which would vary from 30 ft. to 40 ft. depending on load/discharge berth the vessel is en route to. See "Berthing".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: For a vessel in the Gulf of Mexico, and en route to Port Arthur, the best way to route an ETA message is to radio "Port Arthur Radio" (Radio Marine Corporation of America) whose call sign is WPA. Port Arthur Radio will then either send the message through Western Union via its telefax machine or via telex if the receiver of the message has a telex machine. There are also radio stations located in Galveston, Texas (Mackay Radio, call sign KLC) and in Mobile, Alabama (call sign WLO).

TUGS: The exact position that the tug meets the vessel varies with each vessel but usually they meet just below Texaco Island. In some cases they meet as far up as Great Lakes Carbon (usually when vessel is in ballast and going to Gulf Oil Docks). Whether or not the tug uses the vessel's lines or its own lines depends entirely on the circumstances involved but the tugs usually use the ships lines. Port Arthur is served by 2 towing companies, (1) Moran Towing of Texas and (2) Sabine Towing & Transportation Company, Inc.

BERTHING: The first procedure for obtaining a berth at Port Arthur is to submit a Berth Request Form. The Berth Request will contain the following information and will be submitted, in duplicate, to P.O. Box 1428, Port Arthur, Texas: Date of request; type and name of vessel; loading ports; registry or flag; where vessel is to arrive from; ETA; where vessel is to sail for; estimated date of departure; what inbound cargo, if any, consists of; what outbound cargo, if any, consists of; date you expect to begin receiving outbound cargo. The Form must be signed by the Agent or Owner of the vessel. (Berth Request Form will be made available by the Port.) Upon receipt of a Berth Request from the Agent or Owner, the Port will then, upon determining availability of berth, return 1 copy of the initial Berth Request to the Owner or Agent as an assignment of berth. Berths are assigned on a first come first served basis at all times. All changes in vessel's ETA must be given to the Terminal Office immediately. All mooring and unmooring will be done by the Port. Procedure may differ at the various private terminals which are not under the jurisdiction of the Port Arthur Navigation District.

Also see "Developments".

BRIDGES: There are no bridges that would require a vessel to arrive at any certain time at Port Arthur, however, the first bridge approached involves a vertical clearance of 136 ft. MHW.

STEVEDORES: Advance order for longshore gangs varies as to contract held by ILA (International Longshoremen's Association). In Port Arthur, gangs have to be ordered as follows: Order by 1900 hrs. for the next morning (either 0700 or 0800 hrs.); order by 1100 hrs. for 1300 hrs.; order by 1600 hrs. for 1900 hrs. Must order by 1900 hrs. day before for any starting time Sunday or Holiday.

MEDICAL: It is not usually required that the Agent be given advanced notice of required medical attention but in some instances it is helpful in arranging transportation to a hospital and in obtaining a bed in the event the hospitals are near full. Port Arthur is served by 2 hospitals; (1) St. Mary's Hospital and (2) Park Place Hospital, both of which are very well staffed and have adequate facilities for almost any emergency. Also, advance notice is helpful when vessel is scheduled to dock late in evening or during night, as doctors are not in their offices and have to be located.

Particular inoculations required by the Public Health Department vary as to the vessel's last foreign port of call. The only inoculation required of all vessels is smallpox. Any crew members who have not had the required inoculations can usually be given these inoculations on board either by the Public Health Officer or a Physician. This is usually arranged by the Agent or Owner.

TANKERS: There are 3 major Oil Companies: Gulf Oil Corporation; Texaco Oil Company, Inc.; and Petrofina Company. Gulf Oil Corporation and Texaco Oil Co., Inc. are 2 of the largest Oil refineries in the country. The diameter of load/discharge lines range anywhere from 4 in. to 12 in. depending on the grade of the petroleum product being loaded. As far as slop discharge facilities are concerned, ballast tanks at all major oil companies. Gulf Oil has 3,400 linear feet of berth accommodations and Texaco Oil Co. has 5,299 linear feet of berth accommodations together enough to accommodate 11 supertankers plus barges. Petrofina Co., being the smaller of the 3 oil companies, has berth accommodations for 3 vessels.

BULK HANDLING FACILITIES: Texas Oklahoma Port Company's Bulk Marine Terminal in the Port's deepwater industrial park is located at Mile 26, handles dry bulk commodities from rail cars to storage to vessels at rates up to 3,000 t.p.h. and has space available for shipper storage tanks on pads, with open storage for 300,000 tons. The terminal also includes a 750 ft. wharf and is located directly on the Sabine-Neches Waterway which presently offers an authorized channel depth of 40 ft. All terminals described above are served by subject waterway and limitations of depth will vary at the face of dock at individual terminals. The Texas-Oklahoma Bulk Terminal maintains 40 ft. depth at the face of their facility.

DENSITY: Varies from fresh water (1000) to pure salt water (1025) depending on amount of rainfall and tide variations. According to figures obtained from the National Cargo Bureau, average density is 50% salt water or (1012.5).

FRESH WATER: The Port has 4 ships service outlets for fresh water, each of which is served by a 4 in. water line. Watering barges are available in the area for facilities which are not equipped to provide watering services.

FUEL: Almost any grade of fuel or marine diesel is available. In some instances there are fuel lines running directly to docks, but if not, bunkering barge is available. An advance notice is usually required by bunkering barge depending on number of vessels awaiting bunkering.

FIRE PRECAUTIONS: The Port has, in each of 4 equally spaced indentations along the front of its transit shed, a fire hose outlet fed by an 8 in. water line and there are numerous fire hose boxes throughout the transit shed. In addition to this a 24 hour guard service is constantly on the watch and is in direct communication with the Port Arthur Fire Department which is only seconds away. Authorized on dock smoking areas are clearly defined for proper safety controls.

DEVELOPMENTS: Located only 19 miles from sea, the new Public Ocean Terminal of the Port is located on the Sabine-Neches Waterway, presently 40 ft. deep with a minimum bottom width of 400 ft. The initial facility encompasses 360,000 sq.ft. including 1 transit shed 180 ft. × 600 ft. or 108,000 sq.ft. Rail trackage totals 120 car-spots at dockside with a 150-car storage yard behind the wharves. The facility includes a Gantry Crane (handling dry bulk, magnet, container and heavy lift cargoes) which straddles 2 of the 3 marginal tracks, travelling the entire 1,200 ft. length of dock. Crane will lift 75 tons a distance of 75 ft. off the face of docks, with all areas brilliantly lighted for 24 hour cargo operations. In addition to the 25 acre facilities described above, the District owns a total of 73 acres or 1 mile of frontage for future development. The master plan calls for a total of 4 Transit Sheds, additional open-dock wharves and roll-on/roll-off facilities.

GANGWAY/DECK WATCHMEN: Under normal conditions a watchman is not necessary on most vessels. Under certain conditions such as a communicable disease or a malafide crewman a watchman would be feasible but the decision is left up to Master or owner of the vessel. There is a $1,000 fine if a malafide crewman disembarks from the vessel.

OPENING/CLOSING HATCHES: Paragraph 2, Rule No. 1 of the Deep Sea Longshore and Cotton Agreement for Texas ports and Port of Lake Charles, Louisiana, states as follows: "When vessel is in loading or unloading berth, loading and laying of dunnage and the opening and closing of hatches, when in connection with the handling of general cargo and/or cotton, is longshore work and will not be done by ship's crew." This agreement, however expires October 1st 1978.

CUSTOMS ALLOWANCE: Tobacco: Each crewman is allowed to keep 300 cigarettes out of bond while in port. Wine and/or Spirits: Each crewman is allowed to keep 1 quart of spirits out of bond while in port.

CARGO GEAR: A current certified Gear Certificate is required to be on board at all times and is to be kept up to date.

IDENTIFICATION CARDS: American crewman do not need any identification card. Foreign crewman need only the landing permit from Immigration Department in order to go ashore.

CONSULS: The nearest Consul-Generals are in Houston, Texas. Port Arthur has only 2 honorary Vice-Consuls, which are: Norwegian and Spanish. Houston is approximately 90 miles from Port Arthur.

REPAIRS: All types of deck and engine repairs can be accomplished. Main ship repairers are: Gulfport Shipbuilding Corp., Burton Ship Yards, Inc., Sabine Propeller Company and Sabine Neches Shipbuilding Corporation, Coastal Marine Service, all of which are located in Port Arthur.

SURVEYORS: American Bureau of Shipping, Goodhue Building, Beaumont, Texas; Captain Van & Co., 1341 Procter Street, Port Arthur, Texas; Robert K. Hansen, 295 Rosine, Beaumont, Texas; National Cargo Bureau, Inc., World Trade Building, Port Arthur, Texas.

DRY DOCKS: 2 dry docks, largest being Gulfport Shipbuilding Co., which occupies 50 acres with 3,300 ft. of frontage on The Port Authur Ship Channel. Yard designs, constructs and repairs barges, tugs and other vessels. It has fully equipped shops and 4 floating dry docks with lifting capacities of 500, 1,800, 4,000 and 4,200 tons. The smaller dry dock is Burton Shipyards, Inc., which occupies 60 acres with 3,200 linear ft. of frontage on Port Arthur Ship Channel. This yard also designs, constructs and repairs barges, tugs and other vessels. It has fully equipped shops, 2 marine railways with haulout capacities of 1,000 and 1,500 tons and 1 floating dry dock of 3,000 ton capacity.

REPATRIATION: There are facilities for effecting crew changes and repatriation.

AIRPORT: Port Arthur is served by Mid-Jefferson County Airport which is located approximately 10 miles North of Port Arthur on Highway 69. The Mid-Jefferson County Airport is served by TIA (Texas International Airlines) and Delta Airlines.

TIME: Central Standard Time during Winter. Beginning April 28th until October 27th Central Daylight Time (clocks are moved ahead 1 hour). Central Standard Time is GMT minus 6 hours.

HOLIDAYS: Longshore Holidays are: Columbus Day (Second Monday in Oct.), Veterans Day (Nov. 13th), Thanksgiving Day (Fourth Thursday in Nov.), Christmas Day (Dec. 25th), New Year's Day (Jan. 1st), Martin Luther King's Birthday (Jan. 15th), Lincoln's Birthday (Feb. 12th), Washington's Birthday (Third Monday in Feb.), Texas Independence Day (March 2nd), Good Friday, Memorial Day (Last Monday in May), June 19th, July 4th, Labour Day (First Monday in September). At Lake Charles, LA., Mardi Gras Day to be substituted for Texas Independence Day. No work shall be performed on Labour Day or Christmas Day, except in case of fire or where property is in danger.

When holidays come on Saturday or Sunday, the following Monday to be recognized as the holiday. No work to be performed between 1600 hrs. and 1900 hrs. on election days. When Christmas falls on Saturday or Sunday, Monday will be an overtime day and gangs will work as ordered.

POLICE/AMBULANCE/FIRE: Police Department 983–5101; Fire Department 985–5511; Ambulance Service 985–5504 or 983–5666.

TELEPHONES: Facilities for placing a telephone on a vessel by request. There is a coin-operated telephone on the dock for anyone's use.

GENERAL: On vessels arriving directly from a foreign port there are 3 Government Agency Representatives that must board. Already mentioned and explained are Customs and Immigrations. The remaining one, Animal and Plant Inspection Services. The Meat Quarantine representative boards the vessel to seal up all meat with the exception of what will be needed while in port. In the event a vessel is detained in port for some reason and more meat is needed the Meat Quarantine Rep. must return to the vessel and personally break the seal and then re-seal the remaining meats. This representative boards all vessels entering the port whether from foreign or coastwise.

The Plant Quarantine Rep. boards all vessels entering from a foreign port to check all fresh fruits and vegetables for any foreign insects such as the Khapra Beetle.

SERVICES: Tank cleaning done in port must be done by longshore labour. As stated before, all major oil companies have facilities for removing tank washings.

SHORE LEAVE: The question of whether shore leave is allowed is entirely up to the ship's Master. The only requirements being; each crewman on shore leave must have a landing permit issued by the Immigration Department and no malafide crewman may be granted shore leave. Port Arthur has no restrictions pertaining to shore leave.

DELAYS: Delays in berthing usually arise from vessels ETA being delayed and thereby causing a berth conflict. The port is on a first come, first serve basis.

AUTHORITY: Port of Port Arthur Navigation District of Jefferson County.

PORT CANAVERAL, Florida: 28.25 N. 80.35 W.

(See Plan Book)

DOCUMENTS: Vessels arriving in the Customs Territory of the United States, Bureau of Customs Documentary Requirements:

1. The vessel's Register, Load-line International Certificate, Tonnage Tax Certificates, Clearance from last Foreign Port, and Certificate of Financial Responsibility (Oil Pollution).

2. Additional Documents required:

(a) Original Manifest (lists) of:
All Cargo on Board.
All Passengers on Board.
Stores List.
Crew Purchase List.
Crew List.
Narcotic List.

(b) All items listed in Nos. 1 and 2 *(a)* must be presented to the boarding Customs Inspector and later at the Customhouse for entry. In addition a Customs Form 1300 (Master's Oath) and Customs Form 1301 (General Declaration) must be presented at the Customhouse.

(c) Duplicate Manifest (lists) of:
1. All Cargo for discharge at this port.
2. All Passengers for discharge at this port.
3. Stores List.
4. Crew Purchase List.
5. Crew List.
6. Narcotic List.
7. CF3171 – Permit to Lade or Unlade (this will usually be furnished by the vessels agent prior to the arrival of the vessel.

(d) If vessel is proceeding coastwise from Port Canaveral with residue foreign cargo on board, prepare a Traveling Manifest which is a true copy of everything listed in the Original Manifest (2*(a)*). This must be presented to the boarding Customs Inspector and later at the Customhouse.

3. Other Documentary requirements: The Immigration Officer will require the original certificate crew list on form I-418. The same for passengers. He will also require the presentation of all passports and documents of seamen and pax as to their immigration status for entry into the United States. A supply of Seaman's Landing Permit Form No. I-95A and passenger Permit No. I-94 should be maintained and they should be typed and ready for landing.

The Immigration Officer will want to inspect the entire crew. The Customs and Agriculture Officers will want to inspect the food storage areas and the quarters of the crew. The Agriculture Officer will also require a stores list. The Customs Officer will place a seal on the Bonded Stores Locker.

PILOTAGE: Pilotage is compulsory for all foreign vessels and for United States vessels under register in the foreign trade. Pilotage is optional for United States coastwise vessels who have on board a Pilot licensed by the Federal Government. Vessel applies for Pilot through Agent or Port Authority. May also call Pilot Office direct, 305–783–4645. Pilot will board at buoys 7 and 8 (28° 23.8′ N. 80° 33.4′ W.). Pilot boat is 30 ft. long with grey hull, white house and buff deck, has "Pilot" painted on sides. There is no particular signal for Pilot. Pilot boat stations itself 1 mile S.E. of buoys 7 and 8, 0.5 hour before ETA of vessel. Vessels may anchor anywhere in area. Pilot boat is equipped with VHF Channels 12 (156.60 mHz) and 16 (156.80 mHz), but no continuous radio watch is maintained. Advance notice of at least 24 hours should be given.

ANCHORAGES: Within the harbour itself, none. Vessels may anchor anywhere in the area of the Pilot station, buoys 7 and 8.

RESTRICTIONS: Docking and undocking carried on day and night. Draft restrictions – if vessel draft exceeds 33.6 ft. must await rising tide to enter port.

MAX. SIZE: Length and draft at Tanker Berth No. 1 and No. 2, 600 ft., with 32 ft. draft. Cargo dock length unlimited – 30 ft. draft.

HEALTH: See "Health: All Ports" before first U.S.A. ports (Albany). Illness reports made to Miami Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Pilot boat is equipped with VHF Channels 12 (156.60 mHz) and 16 (156.80 mHz) but no continuous radio watch is maintained. Advance notice of at least 24 hours should be given. Best to route ETA cables through Western Union Telegraph. Port Canaveral is equipped with VHF Port Operations frequency 156.6

TUGS: There are 2×1,800 h.p. tugs at Port Canaveral; most ships use the tugs for docking and undocking. Tugs normally join vessel inside jetties and tugs lines are used.

BERTHING: All vessels unless prevented by conditions will be turned around upon entering turning basin and will be berthed headed seaward. No berthing permitted without Port Pilot aboard.

STEVEDORES: Important vessel gives accurate ETA at least 24 hours in advance to enable Agent to order gangs.

MEDICAL: Advance notice for Agents not required, but if available is appreciated. No Public Health Clinic in area, but there are good hospital facilities available. A contract physician's office of the U.S. Public Health Service is in Cocoa Beach, just South of the port.

TANKERS: 2 Tanker Berths available, 32 ft. draft at these berths. No oil to be pumped overboard. Heavy fines imposed for oil pollution, however slight. The ship or ship's Agent will immediately report any spillage of oil on the wharf or on the water and the extent of the spill to the Port Manager and the Harbour Master. If spillage is considerable all cargo operations must stop and vessel prepare to undock.

FRESH WATER: All wharves have facilities for supplying fresh water, delivered by 4 in. water line.

FUEL: The general cargo wharf, and Tanker Berth No. 1 has facilities for supplying fuel. 24 hours notice requested.

FIRE: Ships discovering fire on board or close by on shore will sound repeated long whistle blast signals and use every other available means to report the fire. Gasoline Tankers: All deck scuppers must be plugged before starting to discharge cargo. Supply of sand or sawdust must be on hand near the discharge headers. Static cable must be connected to wharf. Min. 100 lb. pressure must be on water main and fire hose connected. Discharging must be stopped during severe lightning. Deck Officers must keep close check on hose connections for gasket leaks. Emergency Ship Movement Policy of Port Canaveral must be observed.

GANGWAY/DECK WATCHMEN: Not usually employed, this service left to discretion of Master.

OPENING/CLOSING HATCHES: Usually done by stevedores.

CERTIFICATES:
Ship's Register.
Load Line Certificate.
Tonnage Tax certificate.
Derating Certificate or Derating Exemption Certificate.

CUSTOMS ALLOWANCE: 300 cigarettes per crew member. Wine and/or spirits: 1 quart per crew member.
IDENTIFICATION CARDS: Required.
CONSULS: None.
REPAIRS: None – nearest port would be Jacksonville.
REPATRIATION: All facilities available for effecting crew changes and arranging any necessary repatriations.
AIRPORT: Two airports available, serviced by regular airlines, Orlando International Airport, Orlando, Florida approximately 50 miles from the Port, Melbourne Regional Airport at Melbourne, Florida approximately 35 miles from Port. Also Ti-Co Airport approximately 25 miles from the Port, but this airport has only limited service.
TIME: GMT minus 5 hours normal, GMT minus 4 hours Daylight Saving Time.
HOLIDAYS: Numerous holidays do not effect operation of port, which operates 24 hours a day, 7 days a week.
POLICE/AMBULANCE/FIRE: Police/Fire, Tel. 783–7800; Ambulance, Tel. 452–1444.
TELEPHONES: Arrangements are not available for placing on board.
GENERAL: All vessels, civilian and military, will provide wire ropes from the bow and stern with eyes that can be reached by tugs coming alongside. Pilots will make sure wires are in proper position before leaving vessel. All vessels will undock and proceed to outer anchorage when so ordered by Port Manager and/or Harbour Master in the event of: *(a)* a severe oil spillage; *(b)* fire is discovered on board a vessel laden with petroleum, explosives or a quantity of dangerous cargo; *(c)* vessel is in jeopardy due to conditions on shore. Emergency movement of ships will be made with an able sea watch without awaiting for return of other ships personnel.
SHORE LEAVE: Crew allowed ashore.
REGULATIONS: All radio frequency radiations from ships in Port Canaveral must be scheduled to prevent any possible interference to missile tests conducted on the Cape Canaveral Missile test Annex. The only exception is standard ship/shore HF harbour control frequencies. Vessels desiring to radiate will request permission from the Port Manager and/or Harbour Master.
AUTHORITY: Canaveral Port Authority.

PORT EVERGLADES (including Fort Lauderdale), Florida: 26.05 N. 80.05 W. (See Plan Book)

DOCUMENTS:
- 3 copies Cargo Manifest (Forms 7527-A or 7527-B), the original showing all cargo on board, and 2 copies showing only cargo for this port.
- 2 copies Crew Manifest (curio list).
- 2 copies Stores List.
- 2 copies Passenger List (Form I.418).
- 2 copies Crew List (Form I.418).

Customs Boarding Officer will also examine Ship's Register and Load-line Certificate. In addition, the following documents will be required for formal entry to be made within 48 hours of arrival from abroad, or 24 hours from arrival from a United States port:
- Health Pratique.
- Master's Oath (Customs Form 3255).
- All foreign clearances.
- U.S. Certificates of payment of tonnage tax (Customs Form 1002).
- Certified Crew List.

PILOTAGE: Pilot boards at Port Everglades sea buoy, located 26° 05′ 30″ N. Lat., 80° 04′ 45″ W. Long.
ANCHORAGE: The prescribed anchorage area at Port Everglades is outside the harbour and North of the channel. Vessels desiring to anchor off harbour of Port Everglades are required to do so in this area to avoid possible damage to cables laid on ocean floor South of the channel.

South of the channel, immediately offshore, there is a Government Restricted Area.

North of the channel, immediately offshore, there is a spoil bank visible at low water.
RESTRICTIONS: Entrance to Port Everglades is by a straight channel running in a due Westerly direction for a distance of 1.7 miles from the 50 ft. contour of the ocean to the turning basin. The channel is 500 ft. wide at its seaward end, narrowing to 300 ft. wide from jetty entrance to turning basin. The water depth is 39 ft. including the turning basin. All depths are at Mean Low Water.
MAX. SIZE: Max. draft 37 ft. MLWS.
BASIN: The main turning basin is 1,200 ft. East and West and 2,450 ft. North and South with a depth of 39 ft. The North extension of turning basin is 620 ft. wide East and West on the North limits and 900 ft. wide East and West on the South limits and 1,150 ft. North and South, with a depth of 33 ft. The South extension of turning basin is 1,300 ft. wide East and West by 1,300 ft. North and South, with a depth of 32 ft., except Berths 17 and 18, which have a depth of 37 ft. in the Westerly 400 ft. and 34 ft. in the Easterly 900 ft. All depths are at Mean Low Water.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Miami Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: The following radio channels are available to communicate with facilities at Port Everglades:

Ship calling and safety: Channel 16, 156.8 mc/s.
Business and operation: Channel 14, 156.7 mc/s.; 7A, 156.35 mc/s.; 18A; 156.9 mc/s.
Port Everglades Bar Pilot: Channels 16, 13, 14, 18A, 19A.
Port Everglades Towing Co.: Channels 16, 13.

TUGS: 3 tugs available to assist berthing with up to 4,200 h.p. Available 24 hours a day.
BERTHING: Port Everglades has 16,200 linear ft. of berthing facilities, as follows:

Berth	*Length in feet*	*31 ft. depth*	*34 ft. depth*	*37 ft. depth*	*38 ft. depth*
1–2–3	1,601	1,300		301	
4	700			700	
5	700			700	
6	378			378	
7–8	1,200			1,200	
8A	300			300	
9–10	1,200			1,200	
11	500			500	
12–13	1,201			1,201	
14–15	1,201			1,201	
16*–17–18	1,648			1,648	
19–20	1,300		900	400	
21–22	1,325		1,325		
23	240				240
24–25	1,369				1,369
26–27	1,337				1,337
Total	16,200	1,300	2,225	9,729	2,946

*Berth 16 has a depth of 39 ft.

CRANES: Up to 300 ton mobile cranes available for hire.
STEVEDORES: These services are provided by licensed stevedoring firms. Arranged by Agent.
FRESH WATER: Available.
FUEL: Fuel oil available.
REPAIRS: Shipyard equipped with a 350 ft. Syncrolift dry dock with a capacity of 4,200 tons, 1×1,000-ton floating dry dock, complete machine-shop and all supporting facilities.
IDENTIFICATION CARDS: Standard U.S. Immigration Forms I.95 to be made up for each crew member on arrival. Not necessary for crew man already holding Form I.95, issued for the same vessel.
CUSTOMS ALLOWANCE: At the discretion of Customs officers. Normal allowance is 200 cigarettes or 2 lb. tobacco and 1 quart wine or spirits per man. Additional allowances may be given if considered necessary, due to length of vessel's stay in port.
HOLIDAYS: New Year's Day (January 1st); Martin Luther King's Birthday (January 15th); Lincoln's Birthday (February 12th); Washington's Birthday (February 22nd); Good Friday; Memorial Day (May 30th); Independence Day (July 4th); Labour Day; Columbus Day (October 12th); Veteran's Day (November 11th); Thanksgiving Day; Christmas Day (December 25th). When any of the above holidays fall on a Sunday, they will be observed on the Monday following. Work on these holidays is by special arrangement only.
TIME: Eastern Standard Time, GMT minus 5 hours. Daylight saving time, GMT minus 4 hours, from April to October.
AUTHORITY: Port Everglades Authority.

PORT HURON, Michigan: 42.59 N. 82.26 W.

Refer to St. Lawrence for important general information.
PILOTAGE: Compulsory, by Seaway Pilots.
ANCHORAGES: Near head of St. Clair River at Sarnia. Vessels should anchor as close to shore as safely possible to keep channel clear for passing vessels.
RESTRICTIONS: Navigation season from mid-March to end-December approx. Dock channel depth – 25 ft. Vessels size restricted by Seaway locks.
MAX. SIZE: 730 ft. length; 26 ft. draft.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Chicago Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Master must give at least 24 hours notice to Commander 9th Coast Guard District, Cleveland, Ohio, of the vessel's ETA at Snell Lock. Also, at least 24 hours notice of ETA at first U.S. discharge port is required. Port can be contacted through Marine Operator, Sarnia.
TUGS: Available. Not compulsory, but sometimes necessary in bad weather.
BERTHING: Port Terminal Co. Dock: 700 ft. long 26–31 ft. depth.
DENSITY: Fresh water.
MEDICAL: All facilities available.
FRESH WATER: Obtainable by pipe-line at all docks.
FUEL: All grades available by pipe-line at all docks.
REPAIRS: Machine shops available for limited deck and machinery repairs.
AUTHORITY: Port Huron Maritime Commission.

PORTLAND, Maine: 43.39 N. 70.14 W.

DOCUMENTS:

1 Crew List.
1 Passenger List.
2 Stores Lists.
2 Foreign Purchases Lists.
2 Inward Foreign Manifests uniform cargo.
Original Bill of Lading.
1 Form 3251 Masters Oath on entry of vessel.
2 Form 1374 Outward Foreign Manifest.

PILOTAGE: Ship's Agents usually notify Pilot approximately 48 hours in advance of arrival then changes are made at 24 and 12 hours. Pilot boat usually called on Channel 16 and then switched to Channel 11 to continue conversation. Pilot goes aboard ship in vicinity of lightship using ladder on lee side. When weather bad suggest vessel anchor approximately 1 mile North of lightship.

ANCHORAGES:

Anchorage A (General)

Beginning at Eastern corner of Grand Trunk Railway Company Pier No. 3; thence approximately 90°, 1,700 yd. to Brooklyn Ledge Buoy 16; thence 330°, 350 yd.; thence 25°, 780 yd.; thence 303°, 750 yd.; thence 254°, 560 yd.; thence 186°, 750 yd.; and thence to the point of beginning.

Anchorage B (General and Quarantine)

Beginning at Brooklyn Ledge Buoy 16, thence 58° to Little Diamond Island thence along the S.W. shore to the pier on the Southern end of Little Diamond Island; thence 143°, 1,200 yd.; thence 270.25° to House Island Light; thence along the Western shore of House Island to Fort Scammel Point Light; and thence 329°, 1,620 yd. to the point of beginning. Anchorage B is intended for general purposes, but especially for use by oil tankers and other deep-draft ships entering the harbour at night and intending to proceed to the dock allotted at daylight the following morning, or as soon as practicable. This area also is to be used for quarantine anchorage. Any vessel anchored in this area shall be ready to move on short notice.

Anchorage C

Bounded on the N.W. by House Island; on the North by a line running 90° from House Island Light to Peaks Island; on the East by the Western shore of Peaks Island, by a line running 198° from the Westernmost point on Peaks Island to Cushing Island, and by the shore of Cushing Island to its Westernmost point; and on the Southwest by a line running from the Westernmost point on Cushing Island to Fort Scammel Point Light. Anchorage C is intended for use only by small vessels and for temporary anchorage.

Anchorage D

Southerly and Westerly of a line beginning at Lighthouse Channel Buoy 1; thence 35° to Anchorage Buoy E; and thence 145° to the mainland. Anchorage D is for use only by small yachts and pleasure craft, and small, light draft coastwise freighters.

RESTRICTIONS: No entry restrictions at night. Deep draft vessels brought in on high water only.

MAX. SIZE: Size of vessel restricted to 45 ft. draft in harbour area. No outside installations at port yet.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Boston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Tugs in Portland Harbour use Channel 07. Vessels arriving Portland go through radio station in Chatham, Mass., RCA installations, or call station WOU via radio-telephone. VHF Harbour Control at Portland.

TUGS: Tugs join vessel at Spring Point in Portland Harbour. Tugs use own lines at no additional charge. Docking Pilots not supplied by Company but are available.

BERTHING: Tidal conditions govern arrivals and departures.

BRIDGES: No undocking on ebb tide through bridge.

STEVEDORES: 4 hours notice on ordering gangs.

MEDICAL: No advance notice required by Agent. 2 hospitals, Maine Medical Center and Mercy Hospital, who take bed patients. All seamen require certificate showing they have had a smallpox vaccination during last 3 years.

TANKERS: Tankers arriving at Portland Pipe Line, Pier 2, make preparations for 2×10 in. and 12 in. hoses.

Berth	*Depth Alongside*
American Oil Terminal	30 ft. MLW
Chevron Terminal	32 ft. MLW
Portland Pipe-line Pier No. 1	35 ft. MLW
Portland Pipe-line Pier No. 2	48 ft. MLW
Texaco Terminal	30 ft. MLW

DENSITY: Average density 1024.

FRESH WATER: Available by tug for boilers only at rate of tug hire. Drinking water available at piers.

FUEL: No. 6 diesel oil and blended interfuel oils. Delivery is via barge only and 24 hours notice required.

FIRE PRECAUTIONS: None – except at certain oil piers where information given to Shipmaster upon arrival at pier. Ample fire protection, salt water lines, sprinkler system on pier, local fire department.

DEVELOPMENTS: Plans under way for redevelopment of waterfront. Plans call for deepening Fore River from 35 ft. to 45 ft. and studies also under-way to provide offshore unloading of giant super-tankers. Plans to construct a $140 million oil transfer facility. In order to complete project, existing 40 ft. ledge will be removed to 90 ft. and dredging in the inner harbour of Hussey Sound will be done. No date set for final completion.

GANGWAY/DECK WATCHMEN: Not required.

OPENING/CLOSING HATCHES: Ship's crew open hatches.

CERTIFICATES:

Load-line certificate.
Certificate of Foreign Clearance.
Ship's Safety Certificate.
U.S. tonnage tax certificate of previous trip if available
Radio Operator Licence.

CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes per man. Wine and/or Spirits, 1 bottle per person.

CARGO GEAR: No additional cargo gear necessary.

IDENTIFICATION CARDS: Form I-95 must be filled-out on arriving unless seaman has had a prior one made out for a previous arrival on same ship.

CONSULS:

Norwegian: Allan Kjos-Hanse, 30 Mayer Road, Portland, Maine, Vice-Consul.
French: Dr. Paul O. Proudian, 776 Main Street, Westbrook, Maine.
Finnish: Frank W. Bjorklund, 163 Main Street, Norway, Maine.
Italian: Dr. Domenico A. Santoro, 43 Deering Street, Portland, Maine.
Panamanian: Mary Navarro de Cerrillo, Lafayette Town House, Portland.
Swedish: Martin Johnson, Vice Consul, 443 Congress Street, Portland.

REPAIRS: Repair facilities for all types of machinery available.

DRY DOCKS: 3 basins divided into 7 berths which can handle a vessel up to 455 ft. long and 62 ft. wide (not currently activated). Also 3 other smaller marine slipways.

REPATRIATION: Arrangements must be made with Agent in advance by telegram.

AIRPORT: Portland Municipal Airport 3.5 to 4 miles distant. Served by Northeast Airlines and Executive Airlines.

HOLIDAYS: New Year's Day; Washington's Birthday; Patriots Day; Memorial Day; Independence Day; Labour Day; Thanksgiving Day; Christmas and Veterans' Day. Possible to get gangs to work all days except Labour Day and Christmas.

POLICE/AMBULANCE/FIRE: Police 773–5651; Ambulance 772–5463; Fire 772–6531.

TELEPHONE: Arrangements can be made to have phone put on ship, but most docks have pay phones.

GENERAL: Discussions underway with Coast Guard and other officials to install fixed lighthouse stations to replace lightships at entrance.

AUTHORITY: Maine Dept. of Transportation Bureau of Waterways.

PORTLAND, Oregon: 45.30 N. 122.40 W.

PORT LIMITS: The seaward boundary of the Port of Portland is Astoria, 96 miles N.W. of Portland.

DOCUMENTS:

3 Cargo Manifests.
3 Store Lists.
3 Crew Curio Lists.
3 Crew Lists.
1 Clearance from Last Port.
1 Tonnage Tax Certificate.
1 Copy of Vessel's Register.
1 Itinerary of Vessel, port by port.

PILOTAGE: Bar and River – Compulsory. Vessels Masters or their Agents to give notice of arrival or departure between 0800 and 1600 hrs. ETA Bar Pilot Astoria at least 12 hours before arrival giving deepest draft. Pilot station Astoria keeps 24 hour VHF watch on Channel 16, also pilot cutters when on station watch VHF Channel 16 (156.8 mc/s) and MF 2182 and 2738 kc/s.

On approaching Bar Pilot station Masters to contact Pilot cutter for boarding instructions. Bar pilotage covers from sea to the Port of Astoria, river pilotage covers from Astoria to Portland. They change from launch while steaming in channel off Astoria buoy No. 37.

Warning: Due to heavy swells on bar during stormy Winter conditions, crossings may be temporarily suspended, therefore, Masters should attempt earliest VHF radio contact on Channel 16 with Pilots or coastguard station "Cape Disappointment" for latest bar conditions.

During Summer months Masters should use extreme caution in poor visibility as many small fishing craft will be encountered near mouth of Columbia River. Also see "General – Pilotage" before first U.S.A. port (Albany).

ANCHORAGES: Vessels may anchor to await berths at various locations on the Columbia River. Usual spots are at Tongue Point Astoria, Longview and at Vancouver, Washington.

RESTRICTIONS: All vessels Masters or their Agents to obtain Coast Guard clearance at least 24 hours before arrival. Captain of Port may impose movement restrictions if any hazardous cargo. Under 36 ft. draft no movement restrictions, 36 ft. and over up to maximum permissible draft of 38 ft. on Pilot's recommendations.

No size restrictions length and beam, however, Corps of Engineers maintain only 600 ft. wide channel, therefore, deep laden vessels over 600 ft. in length to use extreme caution when turning.

MAX. SIZE: No restrictions length and breadth. Depth at Columbia River entry 48 ft. River channel to Portland/Vancouver maintained at 40 ft. by 600 ft. Seasonal tidal effect up to 3 ft. at Portland.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.

Master to radio with ETA state of crew health noting any sickness. Agent will report sickness to Seattle Quarantine Station for clearance instructions.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Route ETA cables through KLBITT Seattle, Washington.

TUGS: Tugs normally join vessel at designated berth. Tugs' lines used at no charge.

BERTHING: The port operates 5 public ocean cargo terminals containing 28 deepwater berths, including 5 container berths with 6 high-speed container cranes. Present depths alongside berths is 40 ft. min. at MLLW.

There are general cargo berths and berths for commodities which require special handling. Port facilities include 21 transit sheds, and 5 warehouses with 2.2 million sq.ft. of sprinkler protected storage area.

BRIDGES: No arrival times designated if coming from sea and in excess of 750 tons gross. Departures regulated, with bridge closures during peak traffic flow (0700 to 0900 hrs. and 1615 to 1815 hrs.) unless permission granted by Harbour Master.

SPECIALISED CARGO HANDLING FACILITIES: As well as the 6 container cranes, there are 6 whirley cranes, a 150-ton shear leg crane and a 175-ton mobile crane, largest of its kind on the Pacific Coast.

At Terminal Two is a 1,341 ft. container/general cargo pier with a 40 ton and a 50 ton straight line crane and 2×65-ton gantry cranes. Terminal Two contains a Roll-on/Roll-off berth. Pier has a 25-acre open storage yard with rail and truck service. 4 straddle carriers, capable of stacking 20 ft. containers 3 high, or 40 ft. 2 high, serve the yard. Pierside warehouse and container freight station 90,000 sq.ft.

At Terminal Four there is an 8.1 million bushel capacity grain elevator, with box car tipper, truck dumper and barge unloading facility. Log dock is equipped with 2 whirley cranes. There is a Dravo bulk unloader with digging capacity of 900 t.p.h. Tanks are available for special cargoes such as petroleum, molassses, tallow and ore concentrates.

The Terminal 5 elevator is the most modern grain outloading facility in the lower Columbia River and is operated under sub-lease by Columbia Grain Inc.

The elevator has a storage capacity of 1.5 million bushels and is the fastest on the river, with an outloading capability of 2,100 metric t.p.h. The facility can receive grain by rail, truck and barge. The barge leg operates at 1,000 t.p.h., trucks are unloaded at 225 t.p.h. and about 65 railcars can be unloaded in an 8-hour shift.

Terminal Six has a container pier, length 1,800 ft., with 3×50-ton straight line cranes and a 60,000 sq.ft. container freight station. Also a dock for Columbia River container-on-chassis barge service.

STEVEDORES: Allocation for gangs Monday to Saturday must be confirmed at 1100 hrs. to longshore hiring hall. Allocation for gangs Sunday and Monday made at 1100 hrs. Saturday for both day and night gangs. Same procedure applies to allocation of night gangs, but night gangs may be cancelled by 1400 hrs. in afternoon if night gangs are to work.

MEDICAL: Any type medical treatment provided and hospital facilities available. Only inoculation requirement for entry to U.S. is smallpox, except when vessels have called at an area infected by another disease.

TANKERS:

Berth	*Max. Size Vessel Length*	*Draft*
Shell Oil Company	575 ft.	32 ft.
Standard Oil	660 ft. – 700 ft.	35 ft.
Texaco Inc.	650 ft.	30 ft.
Phillips Petroleum Co.	No maximum	30 ft.
Time Oil Co.	600 ft.	38 ft.
Mobil Oil Corp.	550 ft.	31 ft.
Richfield	600 ft.	30 ft.
Union Oil Co.	550 ft.	30 ft.

DENSITY: Fresh water at all times.

FRESH WATER: Available at all berths delivered through pier-side connections.

FUEL: Viscosity grades of B and lower. No advance notice required. Barging essential.

FIRE PRECAUTIONS: Fire precautions respecting tankers administered by U.S. Coast Guard, which enforces shipboard regulations under the Code of Federal Regulations, Part 46, Sub-Part D, Sections 20 to 40; the Police Harbour Patrol, which controls port movements, boards vessels to warn Master regarding harbour regulations, including spilling of oil, etc.; Fire Marshal exercises jurisdiction regarding fire regulations at shoreside facilities serving tankers.

All vessels to have towing cables rigged fore and aft on the offshore side. Cables to be made fast with the eye 1 m. above the water.

GANGWAY/DECK WATCHMEN: Option of vessel owner/agent and available through private firms.

OPENING/CLOSING HATCHES: While ship at dock, opening and closing is work of longshoremen. Ship may open or close own hatches while underway.

CERTIFICATES: Registered tonnage certificates. Certificate of Financial Responsibility (all details must agree with vessel's register).

CARGO GEAR: Valid cargo gear certificate required, acceptable to U.S. Bureau of Labor Standards.

IDENTIFICATION CARDS: Immigration Dept. requires form No. 1-95A and No. 31 (Repatriation). Changes can be effected at any U.S. Immigration Office.

CONSULS: The following countries are represented in Portland:

Austria
Belgium
Costa Rica
Denmark
El Salvador
Finland
France
Germany
Ghana
Great Britain
Iceland
Italy
Japan
Korea
Lebanon
Mexico
Netherlands
Nicaragua
Norway
Panama
Peru
Senegal
Sweden
Venezuela

REPAIRS: All types of deck and engine repairs possible.

DRY DOCKS: 4 floating docks, largest 982 ft.×188 ft. clear width, with lift capacity of 81,000 long tons.

REPATRIATION: Arrangements possible for crew changes or other repatriation.

AIRPORT: Airport 10 miles distant, served by 8 regularly scheduled airlines with direct service and/or connections domestically and world wide.

TIME: GMT minus eight hours. Daylight Saving Time becomes effective annually on the last Sunday in April through the last Saturday in October.

HOLIDAYS: *New Year's Day; President's Day (Feb. 21st); Memorial Day (May 30th); *Independence Day (July 4th); *Labour Day (first Monday in September); Veterans' Day (Nov. 11th); Thanksgiving Day, *Christmas Day (Dec. 25th), State-wide Election Days. Other legal holidays may be proclaimed by state or national authority. When holiday falls on Sunday, the following Monday is observed as holiday. Longshore work performed on any of above listed days is overtime, which is one and a half time rate. Days marked (*) are stop-work days, i.e. no ships will be worked. This also applies to July 5th, which observed locally on unilateral basis.

POLICE/AMBULANCE/FIRE: Police 226–7551; Fire 232–2111; Ambulance: provided by several private firms, but can be obtained through police or fire number.

TELEPHONES: Available by order from terminal superintendents at $5.00 connection charge.

SERVICES: All services available such as compass adjusting, major or minor repairs either with work barges or at ship repair berths; lay berths available; charts available from private companies; all chandlery supplies available.

SHORE LEAVE: Crew members permitted ashore except where vessel has made first arrival from Communist-controlled port.

AUTHORITY: Port of Portland.

AGENT: Cascade Shipping Co., 421 S.W. 6th Avenue, Portland, Oregon 97204. Tel: 503-226-4018. Telex: TWX 910-464-1573. Cable: "Caship".

PORT LAVACA/POINT COMFORT, Texas:

28.40 N. 96.35 W.

DOCUMENTS:

2 Cargo Manifests.
2 Stores Lists CF1303.
2 Crew's Effects Declaration CF1304.
1 Clearance from last Port.
Vessel's Register, tonnage, tax receipts, etc.
2 Copies Crew List.
2 Copies Passenger List.

PILOTAGE: Ship's Agents usually notify Matagorda Bay Pilots as to vessel's ETA. Pilot boat can be contacted on VHF Channel 16, then switch to Channel 26 to continue conversation. Pilot boards at buoy 1-A at position 28° 23′ N. 96° 17′ W.

ANCHORAGES: Marked on chart of Matagorda Bay and approaches.

RESTRICTIONS: Vessels may enter any time day or night. Entrance channel depth 38 ft. Bay Channel depth 36 ft.

MAX. SIZE: Alcoa Dock – size restricted only by channel depth of 38 ft. Public Dock – max. length approximately 600 ft. Draft controlled by channel depth of 38 ft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Galveston Radio (ITT Mackay Marine) and Port Lavaca Marine operator can be contacted on VHF Channel 16, then switch to channel 26 for continued conversation.

TUGS: 1 tug available joining vessel shortly before arriving at berth.

BERTHING: Ore carriers berth at Alcoa private dock. All other vessels berth at Public Dock.

STEVEDORES: Richard Bugg & Co. Inc., PO Box 457, Corpus Christi, Texas. At Alcoa's Dock all plant labour is used.

MEDICAL: No advance notice required. Several clinics and 1 hospital available in Port Lavaca.

DENSITY: Average density is 1010/1012.

FRESH WATER: Fresh water available alongside berth.

FUEL: Not readily available, must be barged or trucked from either Houston or Corpus Christi. Very expensive.

DEVELOPMENTS: Plans for lengthening dock and another warehouse are now being considered.

OPENING/CLOSING HATCHES: At public Dock this is done by stevedores. At Alcoa Dock this is done by ship's crew.

CERTIFICATES: Load line, foreign clearance, safety equipment, financial responsibility (oil pollution), tonnage tax receipts, will be required.
IDENTIFICATION CARDS: Immigration Crew Landing Permit I-95 required for each man.
CONSULS: Only Norwegian Vice-Consul Tel. 512-987-2311.
REPAIRS: Only minor repairs possible. No dry docks.
REPATRIATION: Arrangements are possible but preferably should be accomplished in larger ports.
AIRPORT: Nearest airport 20 miles at Victoria, Texas, served by Texas International only, Corpus Christi Airport about 90 miles; Houston Airport about 150 miles.
TIME: Central Standard Time during Winter. Beginning last Sunday in April until last Sunday in October, Daylight Saving time (clocks are moved ahead 1 hour).
HOLIDAYS: All holidays observed by contract with ILA. See "Houston".
POLICE/AMBULANCE/FIRE: Police Department, 552-6767; Fire Department, 552-2222; Ambulance Service, 552-2988.
TELEPHONES: Telephones are available ashore only. Telephone booth on Public Dock.
AUTHORITY: The Calhoun County Navigation District, Port Lavaca.

Private Dock owned by Aluminium Company of America with its Agent being Alcoa Steamship Company Inc., Point Comfort.

PORT NECHES, Texas: 30.00 N. 93.57 W.

DOCUMENTS, PILOTAGE, RADIO, etc.: Refer to "Port Arthur".
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Meet vessel in Neches River before arriving at berth. Normally 2 tugs used for docking, 1 for undocking.
BERTHING: Jefferson Chemical Co.: distance from sea 30 m., depth at berth 36 ft. Texaco terminal: distance from sea 34 m., depth at berth 32 ft.
MEDICAL: All facilities available.
DENSITY: Fresh water.
FRESH WATER: Available by barge.
FUEL: Bunker C not available ex wharf at Texaco terminal, only by barge from Port Arthur or Beaumont.
GANGWAY/DECK WATCHMEN: Not required unless crewmen detained by Immigration.
CUSTOMS ALLOWANCE: 300 cigarettes and 1 quart wine or spirits for each man.
IDENTIFICATION CARDS: Foreign crew require only Immigration Landing Permit.
CONSULS: Nearest at Houston.
REPAIRS, DRY DOCKS: See "Port Arthur".

PORT ST. JOE, Florida: 29.49 N. 85.19 W.

DOCUMENTS:

All documentation must be on United States forms. At least:
3 Passenger Lists.
3 Crew Lists (1 for visa crew list).
3 Curio Lists.
3 Stores Lists.
2 Complete Manifests.
Clearance Papers from last port.

PILOTAGE: Apply for Pilot through ship's Agent – address is "Port St. Joe, Pilots" and advance ETA 18 hours. "VHF – Channel 16". Pilot boat station is at Sea Buoy, Port St. Joe only and location of anchorage for vessel awaiting a Pilot is 1 mile West of Sea Buoy.
ANCHORAGES: Local harbour charts indicate safe anchorage.
MAX. SIZE: Draft 28 ft. 6 in.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Miami Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Call sign WLO, Mobile, Alabama.
TUGS: None presently available.
STEVEDORES: ETA must be received by 1800 hrs. in order to have gangs at 0800 hrs. following day.
MEDICAL: No notice required. Hospital facilities available. Inoculations required same as public health U.S. Government requirements.
TANKERS: Discharge lines 8 in. No residue discharge allowed. 2 tanker berths 32 ft. draft.
DENSITY: Salt water – heavy concentration.
FRESH WATER: Available in unlimited quantities by hose connection from dock to ship, 1.5 in. to 2.5 in. size at 60 p.s.i.
FUEL: Fuelling facilities limited. Tanker trucks only. 2 days advance notice advisable. 2 grades of fuel oil available: *(a)* grade 6 – Bunker C – 156SSF at 122 degrees Fahrenheit; *(b)* Diesel oil – 36.5 SSU at 100 degrees Fahrenheit; *(c)* Gasoline, kerosene and motor oils available.
GANGWAY/DECK WATCHMEN: Only when requested by ship.
OPENING/CLOSING HATCHES: Work can be performed by either stevedores or crew.
CUSTOMS ALLOWANCE: 1 carton of cigarettes per week per crew member permitted. Further allowances would depend on circumstances. Wine and/or Spirits 1 bottle per crew member as allocated by Customs.
CARGO GEAR: Must be in compliance with "U.S. Government Longshoremen Safety Codes".
CONSULS: None.
REPAIRS: None.
DRY DOCKS: None.
REPATRIATION: Can be accomplished by Agent and Immigration but should be accomplished in larger ports if possible.
AIRPORT: Served by regular airlines. (Southern Airways, National Airways). 6 combined flights a day. Distance 40 miles.
TIME: Saving time from first Sunday in May to last Sunday in October. GMT minus 5 hours Standard Time. GMT minus 4 hours daylight saving time.
HOLIDAYS: No Work Holidays – No work performed New Year's Day, Fourth of July, Labour Day, Christmas Day, or December 24th & December 26th, and Easter Sunday, except handling of mail, baggage and perishables (except bananas) or unless a ship is in distress, such as fire or leaking bottom, or, other causes that would damage cargo or vessel. In event work done on New Year's Day, Fourth of July, Labour Day, Christmas Day, December 24th & December 26th, or Easter Sunday, rate of pay for such ship work shall be double the normal time rate. Should above holidays fall on Sunday, double time will be paid. Following Monday will be paid at time and one-half.

Working Holidays – Armistice Day, Thanksgiving Day and Memorial Day are to be paid for at overtime rate – one and one-half times straight-time rate. Should any of above holidays, except Sunday fall on Sunday, the following Monday will be observed.

POLICE/AMBULANCE/FIRE: Police 227-3181; 227-4526; Ambulance 227-3511 (Comforter), 277-2491 (Prevatt), 227-4011; Fire 227-4011.
TELEPHONES: None available for placing aboard.
GENERAL: In sending ETA when ship is going to arrive over weekends (Saturday and Sunday), a notice wire should be placed and notice ETA should arrive prior to 1700 hrs. Friday.
SHORE LEAVE: Shore leave allowed when cleared by Immigration.
REGULATIONS: Normal working hours of longshoremen from 0800 to 2230 hrs. only 7 days a week.
DELAYS: Only when due to port congestion.
AUTHORITY: Port St. Joe Port Authority.

PORT SAN LUIS, California: 35.10 N. 120.45 W.

TERMINAL OPERATORS: Union Oil Company, Avila Beach, California. Tel. 805 595 2069.
MAX. SIZE: Tankers up to 750 ft. length and 26 ft. draft.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Los Angeles Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Vessels should contact Union Oil Company through Marine Operator. "Walkie-talkie" sets used for communication with terminal. VHF station KTD 411, Channels 10 and 16.
BERTHING: Tanker berths only at Union Oil Company Pier. Vessels tie off pier at berth No. 4. Depth alongside 32 ft. MLW.

1×12-in. and 1×16-in. load/discharge lines. No ballast discharge allowed.

DENSITY: Salt water, 1025.
FRESH WATER: Limited amounts only available from the pier.
FUEL: Not available.
CONSULS: Nearest consuls situated at Los Angeles and San Francisco.
AIRPORT: County Airport, San Luis Obispo, situated 12 miles distant. 6 flights daily to Los Angeles and to San Francisco.
AUTHORITY: Port San Luis Harbor District.

PORT SULPHUR, Louisiana: 29.28 N. 89.41 W.

(See Plan Book)

DOCUMENTS, etc.: Refer to "New Orleans".
PILOTAGE: A vessel coming into port from sea can arrange to pick up a Bar Pilot (Associated Branch Pilots) by furnishing ETA to the ship's Agents, radio contact by VHF Channel 9 and AM Channels 2738 and 2182. Bar Pilot is exchanged for river Pilot at head of Passes, Pilot town, Louisiana. River Pilot (Crescent River Port Pilot's Association) can be arranged through ship's Agent in New Orleans and radio contact as above. Vessel awaiting Pilot for departure may remain at dock until Pilot arrives. Advance notice of 3 hours is required for departing Pilots. This can be arranged by the ship's Master with the shipping foreman.
ANCHORAGES: Anchorage is available on East bank of river opposite to Freeport Sulphur Company dock. Depth of water at anchorage is 40 ft., the controlling depth in the river.
RESTRICTIONS: No restrictions for entry because of time of day, nor conditions of tide or draft except the controlling depth of Mississippi river to Port Sulphur (35–40 ft. as published in reports by U.S. Army Corps of Engineers).
MAX. SIZE: Max. permissible length – 560 ft., breadth not limited, draft equal to controlling depth of river.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New Orleans Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Tropical Radio WNU New Orleans.
TUGS: Tugs not normally required. Shore crews usually handle ship's lines. Tug may join the vessel opposite the dock. Charges for handling ship's lines.

STEVEDORES: Not normally required. When requested, stevedoring services can be obtained from port of New Orleans; contact ship's Agents for particulars.
MEDICAL: Advance notice for personnel requiring medical service is required through ship's Agents. Hospital facilities are available.
TANKERS: 1 tanker berth, permitted draft equal to or greater than controlling depth of Mississippi River. Diameter of loading/discharge lines is 12 in. and 16 in. respectively.
DENSITY: Density in port not affected by tide. Fresh water.
FRESH WATER: Fresh water is available, can be loaded with 1.5 in. fire line.
FUEL: Fuel may be loaded by barge with vessel at anchor. Fuel transfer is not permitted at dock.
FIRE PRECAUTIONS: No welding repair permitted at dockside. Fuel transfer is not permitted. No other specific precautions observed except for "no smoking" precautions, etc.
GANGWAY/DECK WATCHMEN: Services of watchmen desirable but not required. Port does not furnish this service.
CERTIFICATES: Certificate of condition of cargo handling gear required when use of gear is necessary.
IDENTIFICATION CARDS: Immigration form I-95.
CONSULS: Consuls offices are located in New Orleans, Louisiana.
REPAIRS: Engine and deck repairs are possible when the dock is not otherwise occupied.
AIRPORT: New Orleans International Airport, served by most major airlines. 55 miles from Port Sulphur.
TIME: Local time is Central Standard Time, except from May/October, Daylight Saving Time is in effect.
HOLIDAYS: Vessels are loaded on all holidays except Christmas Day.
POLICE/AMBULANCE/FIRE: Port Sulphur, Louisiana, 564–2525; 564–2525; 564–3231, respectively.
TELEPHONES: Jacks for telephones are provided at no additional cost to tankers loading at port.
SHORE LEAVE: Crew members are allowed ashore.
DELAYS: Loading will not commence until all holds are clean of scale and other foreign matter.
AUTHORITY: Private port, Freeport Sulphur Company, Port Sulphur.

REDWOOD CITY, California: 37.50 N. 122.28 W.

(See Plan Book)

DOCUMENTS, PILOTAGE and all general information refer to "San Francisco".
RESTRICTIONS: Though a natural deep water channel extends down the bay to Redwood City there is controlled depth channel 500 ft. wide and 30 ft. deep across San Bruno Shoal. The entrance channel to the port is 2 miles long and 30 ft. deep (all depths are at MLLW) and 300 to 350 ft. wide. There are 2 large turning basins at either end of the port harbour channel.
HEALTH: See "Health: All ports" before first U.S.A. port (Albany). Illness reports made to San Francisco Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
BRIDGES: The San Mateo Hayward Highway Bridge with a vertical clearance of 138.5 ft. and horizontal of 500 ft. crosses the ship channel.
BERTHING: *Wharf No. 1*, 500 ft. of berth space, and *Wharf No. 2*, 355 ft. of berth space, are dredged to a depth of 32 ft. alongside. Wharf No. 1 has 32,000 sq. ft. There are pipe-line connections for petroleum products and bulk cement.

Wharf No. 3 is an open wharf, 450 ft. long, and is used primarily for handling lumber and gypsum rock. It also has petroleum pipelines.

Wharf No. 5 has 500 ft. of berthing space with a depth of 33 ft. alongside. It was designed to accommodate large oil tankers and freighters, and for handling heavy lifts.

Capabilities include complete facilities to handle LASH (Lighter Aboard Ship) system.
AUTHORITY: Port of Redwood City.
AGENT: See "San Francisco".

RICHMOND, California: 37.56 N. 122.25 W.

(See Plan Book)

(a) *STANDARD OIL COMPANY OF CALIFORNIA TERMINAL.*
(b) *OTHER TERMINALS AT RICHMOND.*

(a) STANDARD OIL COMPANY OF CALIFORNIA TERMINAL.
DOCUMENTS and all general information, refer to "San Francisco".
LOCATION: Richmond Long Wharf and Point Orient Wharf are situated on N.E. side of San Francisco Bay, a protected harbour. The refinery and storage tanks are near the wharves.

The exact position of the Long Wharf is Lat. 37° 55′ 20″ N. Long. 122° 24′ 35″ W. Wharf heading is 324° to 144°.

The exact position of the Point Orient Wharf is Lat. 37° 57′ 20″ N. Long. 122° 25′ 39″ W. Wharf heading is 356° to 176°.

There is adequate anchorage and room for manoeuvring in the bay.
MAX. SIZE: The main ship channel into San Francisco has a project depth of 50 ft. However, the 35 ft. depth of the Southampton Shoal channel restricts the size of ships to wharves.
LIGHTENING: When a lightening operation is necessary the terminal management will direct the ship to anchorage 9. The ship to be lightened will install fenders before the lighter ties alongside. The terminal will provide the fenders. The lightening supervisor and ship's officer will hold a meeting to discuss the cargo transfer. During transfer, follow the same precautions and safety regulations that apply to cargo transfer at the wharf. The transfer rate will be regulated by the lightening vessel. The lightening supervisor will observe all the lightening operations. The terminal wil provide oil spill recovery equipment during lightening.
HEALTH: See "Health: All Ports" before first U.S.A port (Albany). Illness reports made to San Francisco Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: San Francisco harbour advisory radar system, designated bridge-to-bridge frequency: VHF Channel 18a (156.9 mHz).

Federal communication regulations require that at any time VHF radio is in operation, Channel 16 must be monitored (156.8 mHz distress and calling frequency).

The 2-3 mc. radio telephone call letters for the San Francisco Bay area are KLH.

Richmond Long Wharf (radio call – Chevron Shipping) is equipped with VHF radio, manned 24 hours per day. Channel 10 (156.5 mHz) is the operating frequency. While at anchor, in San Francisco Bay, vessels should maintain normal listening watches on VHF Channel 10.

The Master of a vessel bound for San Francisco Bay is requested to advise Chevron Shipping (Cables address: Chevronship Richmond Sanfrancisco) of ETA, 7 days, 3 days and again 1 day (24 hours) before arrival at the wharf. First ETA message should include:

Estimated time of arrival at the wharf (local time).
Last port of call.
Estimated deep draft at arrival.
Quantity of ballast to be discharged.
Quantity and grade of cargo to be transferred.
Distance from bow to cargo and bunker manifolds.
Size and type of cargo and bunker connections.
Quantity and grade of bunkers and lubes required.
Quantity of fresh water required.
Number of crew replacements expected.
Amount of provisions and stores to be loaded.
Repair work anticipated.
Make 24-hour ETA as accurate as possible and whenever arrival time changes, by 1 hour or more, send a correcting message promptly.

BERTHING: At least 1 hour before docking contact Chevron Shipping, in Richmond, by VHF radio (Channel 10, 156.5 mHz) and request a berth assignment. They will try to berth as soon as you arrive. However, if no berth is available, anchor in the prescribed anchorage (as directed by the Captain of the port) and maintain radio contact with Chevron Shipping, Richmond.

There are 2 piers that accommodate oil transfers. They are referred to as Richmond Long Wharf and Point Orient Wharf.

Long Wharf: Richmond Long Wharf, a "T"-head pier, has an overall length of 2,464 ft. It consists of concrete and wooden piles and a concrete superstructure connected to the shore, 4,200 ft. away by a piled causeway. The fender-to-fender width is 114.5 ft.

There are 4 deep water berths on the West side, each approx. 600 ft. long. They are numbered 1 to 4 from South to North. Water depth is 38 ft. at MLLW. Carefully observe deep draft during periods of low water. There is an inner berth, No. 5 that may be used for bunkering small ships; water depth is 18 ft. at MLLW. The other inner berths, Nos. 6 to 12, are used primarily for barge loading.

Point Orient: The Point Orient Wharf, an "L"-head pier, is 2.25 miles North of the Long Wharf. It is 504 ft. long and 60 ft. wide. It is supported on wooden piles and has a causeway that extends 1,200 ft. to the shore.

There is one ship berth, No. 1 where the water depth is 36-40 ft. at MLLW. There is also one barge berth No.2.
LOADING AND UNLOADING: All berths are fitted with 4–, 6– and 8–in. hoses for cargo transfer. Berth No. 4 is fitted with 1×8–in. and 2×12–in. Chiksan loading arms. Berth 1, at the Long Wharf has a similar Chiksan system – 2×12–in. arms. All flange facings are ANSI 150–pound rating.

Several products can be loaded at each berth.
BALLAST: The terminal has facilities to receive some ballast (max. capacity 25,000 bbls. – normal capacity 15,000 bbls.). However, arrangements for this to be made through Agent before arriving at the wharf. All ballast to be discharged must be pumped to shore while berthed at wharves.
POLLUTION: The Federal Water Pollution Control Act prohibits the discharge of oil or oily waste in the waters of San Francisco Bay which causes a film or sheen on the water or discolours it or causes a sludge or emulsion beneath the surface of the water.

Regulations enforced by the Bay Area Pollution Control District also prohibit the emission of smoke and soot. Vessel can be fined if it emits visible smoke (Ringelmann 1) for more than 3 minutes in one hour, or blows its boiler tubes enough to create a soot nuisance on shore.

In addition, the terminal has certain regulations designed to eliminate obnoxious odours. Vessel may, therefore, be required to follow special procedures before tank cleaning, loading or ballasting. If, in spite of precautions, vessel does cause such odours, loading or unloading operations may be stopped.
MEDICAL: No facilities at wharves. Local ambulance may be reached at: Cadillac Ambulance Service (415) 234-3242; Alhambra

Air-ground Ambulance Service (air) (415) 228-1096; California Aviation Service Inc. (air) (415) 569-3855.

FUEL: Many grades of bunkers, diesel and lubricating oils are available in bulk or drum quantities. Agents order them from Traffic and Distribution or Chevron International at least 48 hours before vessel arrives, otherwise, vessel may be delayed.

To take on bunkers and diesel, vessels must be able to connect to terminal's 3-in., 4-in., or 6-in. 150-lb. ANSI flanges.

PROVISIONS: Provisions and stores will be loaded only at Richmond Long Wharf, and only when loading does not interfere with cargo or ballast transfer. If vessel is large and not equipped with booms, Agent need to supply a crane for the loading. Stores will not be handled by wharf personnel.

FRESH WATER: Potable water provided. Make arrangements through Agent.

REPAIRS: Terminal Management approval required for any repairs, hot work or maintenance work at the piers. No repairs will be allowed that delay cargo transfer or lengthen the time it takes.

SHORE LEAVE: Ship's personnel are not permitted ashore and shore personnel are not permitted aboard for any purpose whatsoever until pratique has been granted. Once it is granted, no one may walk to shore on the Long Wharf causeway.

AUTHORITY: Standard Oil Co. of California, Richmond, California.

(b) OTHER TERMINALS AT RICHMOND

BERTHING: *Parr-Richmond Bulk Commodity Wharf:*

Owners: Parr-Richmond Terminal Co.

Operated by: Parr-Richmond Terminal Co.

Use: Receipt and shipment of various dry-bulk commodities.

Water Depth: 35-36 ft.

Mechanical handling facilities: On wharf; 4×50-ton electric, travelling full portal gantry cranes, each with 100-ft. boom and 2×45-ton electric travelling full portal gantry cranes, each with 118-ft. boom, 36-in. belt conveyor for shiploading with 10,000-ton-capacity covered storage warehouse.

Santa Fe Sugar Dock:

Owned and operated by: Atchison, Topeka and Santa Fe Railway Co.

Use: Receipt of sacked sugar by inland waterway vessels for transfer to railroad cars.

Dimensions: Length of face 545 ft., lower end 51 ft.; depth alongside at MLLW 24 ft.

Levin Metals Corporation:

Owner: City of Richmond Port Commission.

Operated by: Levin Metals Corporation.

Use: Scrapping of ships, consideration of scrap and export loading of cargo.

Dimensions: Length of face 555 ft. each; Pier 1 depth 35-38 ft., Pier 2, 17 ft.

Richmond Container Terminal No. 3: (Under construction, ready June, 1979).

Owners: City of Richmond.

Operated by: Matson Terminals Inc.

Use: Receipt and shipment of containerized cargo in foreign and domestic trade.

Dimensions: Length of face 1,009 ft.; depth alongside at MLLW 40 ft.

Mechanical handling facilities: Two rail-mounted deck cranes, two transfer devices and two bridge cranes. Semi-automated operation.

Remarks: Face of wharf is in line with the face of adjacent wharf, providing 1,550 ft. of continuous berthing. Area of container terminal – 16 acres plus back-up area.

Richmond Terminal No. 4 Wharf:

Owners: City of Richmond.

Operated by: Richmond Terminal Agency, Pacific Molasses Co. Ltd., & Dorward & Sons Co.

Use: Bulk Liquids.

Dimensions: Length of face 1,047 ft.; South side 175 ft.; North side 100 ft.; depth alongside at MLLW 32-50 ft.

Canal Industrial Park and Willamette Iron & Steel Co.:

Owner: City of Richmond Port Commission.

Operated by: Canal Industrial Park (Pasha Truckway) & Willamette Iron & Steel Co.

Use: Import service and delivery of foreign automobiles; ship repairs.

Dimensions: Length of face 700 ft.; depth alongside at MLLW 35 ft.; usable berthing space with dolphin 900 ft.

Mechanical handling facilities: Mobile handling equipment available. Complete range of crane and ship facilities for major ship repair.

TANKERS: *Atlantic Richfield Tanker Dock;*

Owned and operated by: Atlantic Richfield Co.

Use: Receipt and occasional shipment of petroleum products; bunkering vessels.

Dimensions: Length of face approx. 250 ft.; lower and upper sides 40 ft. each.

Atlantic Richfield Barge Dock:

Owned and operated by: Atlantic Richfield Co.

Use: Receipt and shipment of petroleum products by barge; bunkering vessels.

Dimensions: Length of face 150 ft.; dept alongside at MLLW 34 ft.

Richmond Terminal No. 1 Wharf:

Owners: City of Richmond.

Operated by: Petromark Inc.

Use: Receipt and shipment of petroleum products, chemicals and petrochemicals.

Dimensions: Length of face 557 ft.; depth alongside at MLLW face 35 ft.

Richmond Terminal No. 2 Liquid Cargo Wharf:

Owners: City of Richmond.

Operated by: Canal Industrial Park.

Use: Receipt and shipment of vegetable oils, chemicals and petrochemicals.

Dimensions: Length of face 380 ft.; depth alongside at MLLW 35 ft.

Texaco Wharf:

Owners: Texaco Inc.

Operated by: Texaco Inc.

Use: Receipt and shipment of petroleum products.

Number of berths: 1.

Water depth: 35 ft.

Time Oil Company Wharf:

Owned and operated by: Time Oil Co.

Use: Receipt and shipment of petroleum products.

Number of berths: 1.

Water depth: 35 ft.

Special remarks: 3×10-in. pipe-lines extend to 25 steel storage tanks in rear; total capacity of 618,000 barrels.

Union Oil Co. Tanker Dock:

Owned and operated by: Union Oil Co. of California (also services GATX Terminal).

Use: Receipt and occasional shipment of petroleum products; bunkering vessels.

Dimensions: Length of face 225 ft.; lower end 45 ft.; upper end 45 ft.; depth alongside at MLLW 35 ft.

Mechanical handling facilities: Hose handling at wharf is by ship's gear and small tractor crane.

Union Oil Co. Barge Dock

Owned and operated by: Union Oil Company of California.

Use: Shipment and occasional receipt of petroleum products; bunkering vessels.

Dimensions: Length of face 150 ft. (approx.); lower end 45 ft.; depth alongside at MLLW 35 ft.

Mechanical handling facilities: Hose handling at wharf is by ship's gear and small tractor crane.

Remarks; Wharf and Tanker Docks are spaced about 230 ft. apart; together they provide 1 large tanker berth.

AGENT: See "San Francisco".

RICHMOND, Virginia: 37.32 N. 77.25 W.

(See Plan Book)

DOCUMENTS: See "Hampton Roads".

PILOTAGE: Entrance through Hampton Roads. Virginia Pilots Assn. original contact same as for Norfolk, Virginia. Pilots will arrange for change of Pilots to proceed up the James River.

ANCHORAGE: Hampton Roads anchorage, also river anchorage approximately 40 miles up river, shown as "Upper Brandon" on charts.

RESTRICTIONS: Navigation of river above Upper Brandon recommended in daylight hours, except vessels under 250 ft. length.

MAX. SIZE: Max. length recommended by Pilots 550 ft., draft 21 ft. 6 in. any tide, depth of channel 25 ft. MLW tide, change 3 ft. 5 in.

HEALTH: See "Health: All ports" before first U.S.A. port (Albany). Illness reports made to Fort Monroe Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: See "Hampton Roads".

TUGS: Not needed for berthing unless vessel is to be turned around on arrival. Tug available at Terminal on reasonable notice.

BERTHING: Vessels berth alongside wharf 1,250 ft. long. Depth 25 ft. at MLW.

BRIDGES: 2 bridges across river between Hampton Roads and Richmond. No specific time or notice required.

STEVEDORES: Arrangements to be made through Agents. 48 hours notice requested.

MEDICAL: Vessels cleared by U.S. Health officials at Hampton Roads before proceeding up river.

DENSITY: Water considered as 100% fresh.

FRESH WATER: Available at pier.

FUEL: Bunkers available only at Hampton Roads.

GANGWAY/DECK WATCHMEN: None required, unless crew detained by U.S. Immigration.

OPENING/CLOSING HATCHES: On bulk cargo usually opened and closed by ship's crew, also steel hatches handled by ship's crew, sometimes determined by terms of Charter.

CERTIFICATES:

Ship's register.
Load-line Certificate.
Safety Certificate.
Tonnage tax receipts.
Certificate of nationality.
Passenger Certificate.

CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes (1 carton for 2/3 days) if further allowance is needed Customs Officer will return on request of Master. Wine and Spirit, 1 bottle per officer, Customs Officer will return on request of Master.
IDENTIFICATION CARDS: Immigration landing permit required.
CONSULS: No consuls in Richmond, handled through Hampton Roads if needed.
REPAIRS: Only minor repairs, no shipyards.
REPATRIATION: Handled through Norfolk, Virginia.
AIRPORT: Approximately 10 miles from port, regular airline service.
TIME: Eastern time GMT minus 5 hours. Daylight saving time from first Sunday in May to last Sunday in October.
HOLIDAYS: January 1st, May 30th, July 4th, Labour Day (1st Monday in September), Thanksgiving Day, Christmas Day.
POLICE/AMBULANCE/FIRE: Police 780-9461; Ambulance 780-9404; Fire 780-9191.
TELEPHONES: No arrangements for placing aboard vessels.
SHORE LEAVE: Allowed. Proper papers should be available.
AUTHORITY: Port of Richmond Advisory Commission.

RIVERHEAD, Long Is., New York. Petroleum storage terminal operated by Northville Industries Corp. 41.00 N. 72.39 W. (See Plan Book)

DOCUMENTS: See "New York".
LOCATION: The fixed Offshore Tanker Berth is situated 1.2 miles offshore from the North shore of Long Island in Long Island Sound, 4 miles 257° true from the beacon on Mattituck Inlet breakwater and 12.7 miles 178.5° true from Falkner Island Lighthouse. The geographic position of the centre point of the Operating Platform is in Latitude 41° 00′ 01″ North and Longitude 72° 38′ 50″ West. Jacobs Point Lighted Bell Buoy No. "1" is in 65 ft. of water 600 yds. 275° true from the platform. The platform has 4 navigation lights situated on each corner of the structure flashing every second. A similar navigation light is also situated on each of the East and West mooring dolphins.
PILOTAGE: Pilot is arranged for by ship's Agent. Vessels with a draft of 40 ft. or less will pick up Pilot 2 miles South of Point Judith Buoy No. "2" (location of buoy: Latitude 41° 19.3′ North, Longitude 71° 28.5′ West). Vessels with 40 ft. to 60 ft. draft will pick up Pilot N.E. of Block Island at Latitude 41° 15′ North, Longitude 71° 24′ West just South of Buoy "A". Distance to platform is approximately 65 miles. The Pilot will also perform the duties of Docking Master while vessel is at the Offshore Platform. It is required that the Pilot remain on board on standby while the vessel is moored at the Offshore Platform. Vessels with 50 ft. or deeper draft require a Pilot's assistant to assist regular Pilot in navigating the vessel into Long Island Sound and to the Offshore Platform.
ANCHORAGE: Vessels awaiting berth shall anchor 1 to 1.5 miles North of the platform facility. Holding ground is good and 90 fathoms (6 shackles) in the water is considered safe.

Platform crew under the supervision of the Marine Supervisor will board about 1 hour prior to scheduled mooring time. Generally launch does not arrive before this time, except for emergencies.
RESTRICTIONS: Generally, vessels are moored on any stage of the tide and at night when weather conditions permit.
MAX. SIZE: Length in North berth 1,150 ft. LOA and draft not to exceed 60 ft. Length in South berth 700 ft. LOA and draft not to exceed 42 ft.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New York Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Tugs are arranged for by ship's Agent. Tug boats generally come from New Haven. When ordering tugs, sufficient time must be allowed for tug to cross Long Island Sound at distance of approximately 18 miles. All vessels require a minimum of 2 tugs. Vessels over 80,000 d.w.t. shall have 3 tugs equalling a total of 6,000 h.p.
COMMUNICATION: Telephone at Riverhead Park 7-5600 (Code for station to station: dial 516 Park 7-5600). Cable Address Northville Riverhead New York. Radio I.T.T. Amagansett.
VHF: Communication with shore and launch via portable VHF radiophone. This equipment on continuously during vessel's stay. The Platform crew maintains radio watch and constant communication with shore for general purposes and emergencies.
BALLAST: No ballast disposal facilities. Long Island Sound is inland water and United States Anti-Pollution Regulations rigidly enforced. No bilge water, oil-contaminated water, garbage or any waste matter which may pollute sea water is to be discharged overboard while vessel within Long Island Sound and approaches.
STORES/FRESH WATER/FUEL: No fresh water facilities. Small quantities provisions may be purchased at local stores in Riverhead, 4 miles inland. All services contingent upon Marine Supervisor's approval and on weather conditions.
QUARANTINE, CUSTOMS AND IMMIGRATION: New York City is port of entry for Northville. Entry and clearance must be arranged by ship's Agent. Boarding officers board in the anchorage or upon arrival. Pertinent Government officials should be advised in sufficient time, usually not less than 24 hours, Monday through Friday and 48 hours on Saturday and Sunday. Generally, entry and clearance can be arranged by Agent who should advise Customs well in advance of vessel's arrival, thus saving necessity of having Master go to Customs House in New York.
MEDICAL: Hospital in Riverhead. Medical attention must be arranged by ship's Agent. U.S. Public Health Service not available locally.
BERTHING: North Berth (1): Vessels berthed during flood tide will moor starboard side to and during the ebb tide current will moor port side to. Forward and stern spring lines are secured to the breasting dolphins and bow and stern lines are made fast to mooring dolphins located to the East and to the West of the platform structure.

South Berth (2): Vessels berthed during flood tide current will moor port side to and during the ebb tide current will moor starboard side to. Forward and stern spring lines are secured to the breasting dolphins in the South berth. Bow and stern lines are made fast to the North berth breasting dolphins, and if necessary, also to the mooring dolphins located to the East and West of the platform structure.

Four mooring buoys are situated South of the mooring facility and formally used for mooring vessels in the North berth. Mooring buoys will be used at the discretion of the Docking Master (Pilot) and/or Northville's Marine Supervisor.

Masters will note that platform is situated in an open roadstead and that all mooring equipment must be in proper working order and in good condition. If, in the opinion of the Pilot (Docking Master) or Northville's Marine Supervisor, the vessel's mooring equipment is inadequate, the vessel will not be permitted to remain in the berth.

Vessels must be equipped with manilla or better mooring lines of not less than 8 in. circumference and not less than 90 fathoms length.

Vessels having wire moorings secured on warping winches with brake are acceptable. Warping winches must be adequate to handle mooring lines under heavy strain. Efficient stopper lines must be readily available to "stop off" mooring lines for transfer from winch to bitts without loss of tension.

The Docking Master (Pilot) will assist the Master in the berthing of the vessel and supervise the mooring and unmooring operations.
OIL TRANSFER CONNECTIONS: The Marine Supervisor and/or his crew will supervise the connecting and disconnecting of the hydraulically operated steel loading arms.

In the North berth there are 2×16 in. and 2×12 in. steel loading arms, and in the South berth there are 2×12 in. steel loading arms, all with appropriate reducers. The 12 in. L/U arms will connect to 8 in., 10 in., and 12 in. 150 lb. ASA flanges. When connecting 2×12 in. L/U arms the centre line of the ship's flanges must be a minimum of 6 ft. (72 in.) apart.

The 16 in. L/U arms will connect to 10 in., 12 in., 14 in., and 16 in. 150 lb. ASA flanges. When connecting 2×16 in. L/U arms the centre line of the ship's flanges must be a minimum of 15 ft. (180 in.) apart.

The L/U arms cannot be connected directly to valve flanges. Flanged spools or reducers must be provided. Provisions must be made available for quick draining of the L/U arms.
LOADING AND DISCHARGE OF CARGO: Oil transfer operations are entirely in accord with the Rules and Regulations of the United States Coast Guard. Declaration of Inspection by the Dock Person in Charge and the Vessel Person in Charge must be completed prior to commencement of any oil transfer operations.
WEATHER AND TIDE: Strong winds from North and N.W. experienced during Winter and Spring. Tide during maximum ebb and flood often reaches 3.5 to 4 knots velocity.
DENSITY: Flood tide density 1025. Ebb tide density 1020.
CUSTOMS ALLOWANCE: Tobacco, wine and/or spirit allowance: Same as permitted in New York Harbour.
IDENTIFICATION CARDS: Issued by Immigration Officer.
CONSULS: All Consuls Offices located in New York City.
REPAIRS: No repair facilities are available. *Vessel must remain* in sailing readiness at all times while moored at the platform facilities.
DRY DOCKS: At New York Harbour.
REPATRIATION: Agent arranges all crew repatriation via New York.
AIRPORT: New York Airports 80 miles distant.
TIME: Standard time GMT minus 5 hours. Daylight Saving Time first Sunday of May to last Sunday of October, GMT minus 4 hours.
POLICE/AMBULANCE/FIRE: Terminal attends Police/Ambulance and Fire services.
SHORE LEAVE: Shore leave permissible.
LAUNCH SERVICE: The terminal does not provide launch service for crew shore leave. There is a local contractor who has launch service available and arrangements must be made by the vessel's local Agent.
AUTHORITY: Northville Industries Corp.

ROCHESTER, New York: 43.17 N. 77.36 W. (See Plan Book)

Refer to "St. Lawrence Seaway" for important general information.
PILOTAGE: Not necessary.
ANCHORAGE: No anchorage available within harbour limits.
MAX. SIZE: Channel depth 23 ft. (LW). All depths in channel or alongside wharves should be checked carefully against the latest recorded elevated or lake level. This may vary from month to month. Entrance width 300 ft., turning basin depth 23 ft., 600 ft. in width.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to New York Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Available. Arrange via ship's Agent.

BERTHING: Entrance piers are parallel to each other, and about 450 ft. apart. The West Pier is 3,036 ft. long and the East Pier 2,699 ft. long. Fog horn and beacon on West Pier, East pierhead lighted. Radio beacon. Port Authority Terminal located on West bank of Genesee River at end of Lake Pier. Has a quay wall of about 1,400 ft. in length. Depth of water alongside 23 ft. (LWD). Charlotte Docks located about 2 miles upstream from mouth of river on West bank.
CRANES: No floating cranes available. Stationary cranes available on order.
BRIDGES: New York Central Railroad swing bridge near mouth of the river and upstream from Port Authority Terminal. Traffic lift bridge about 0.25 mile upstream from railroad bridge.
STEVEDORES: Available by request. Charges to suit individual commodities.
DENSITY: Fresh water.
FRESH WATER: Available at both docks.
FUEL: Oil may be furnished direct from trucks at Port Authority Terminal.
IDENTIFICATION CARDS: Required.
CONSULS: None.
REPAIRS: Minor only.
REPATRIATION: Can be arranged.
AIRPORT: Approximately 10 miles from port.
POLICE/AMBULANCE/FIRE: Police, 232-3311; Ambulance/Fire, 232-2121.
SHORE LEAVE: Allowed.
AUTHORITY: Rochester-Monroe County Port Authority.

SACRAMENTO, California: 38.32 N. 121.30 W.

(See Plan Book)

DOCUMENTS: See "San Francisco."
PILOTAGE: Pilots board vessel in San Francisco Bay.
RESTRICTIONS: *Ship Channel:* Distance, Fort Point to Sacramento, 79 nautical miles (146 km.). Bottom width in river reach 300 ft. (91.4 m.). Bottom width in channel reach 200 ft. (61.0 m.). Min. depth at MLLW tide 30 ft. (9.1 m.).

Harbour: Area 60 acres (24.3 hectare). Min. depth at MLLW tide 30 ft. (9.1 m.). Tidal variation average 5 ft. (1.5 m.).
MAX. SIZE: 750 ft. LOA and 103 ft. beam, 30 ft. deep at MLLW.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to San Francisco Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: KBA 386, 156.9 megacycles (24 hours).
TUGS: Join vessel at Light 76 (turning basin).
BERTHING: Anchor – ships will have at least 1 anchor ready to let go in case of emergency, when docking or undocking. Anchor will be raised immediately upon ship being made fast to wharf.

Insurance lines are required on off-shore side, fore and aft, immediately after ship is made fast to wharf.

A cargo net shall be securely placed under gangways. Save-all nets shall be rigged abreast of holds at which general cargo is being handled.

Rat guards, at least 3 ft. in diameter, shall be placed on all mooring lines immediately after docking, and shall be maintained in place until ship's departure.

Pier 1:
Owned and operated by: Port of Sacramento.
Use: Bulk-loading rice facility.
Construction: Concrete with timber fender piles, length 600 ft. (182.9 m.).
Water depth: 32 ft. (9.8 m.).
Storage capacity: 22,000 tons; 8 silos at 2,200 tons each; 6 silos at 470 tons each; silos at 270 tons each.
Mechanical handling facilities: 3 loading spouts dockside, conveyor system to storage facility.
Loading rate: 600 t.p.h.

Wharf 2:
Owned and operated by: Port of Sacramento.
Use: General cargo.
Construction: Concrete with timber fender piles; apron width 60 ft. (18.3 m.); length 600 ft. (182.9 m.).
Water depth: 30 ft. (9.1 m.).
Transit sheds: One, 86,400 sq. ft., one, Air Support Building, 40,000 sq. ft.

Pier 5:
Owned by: Port of Sacramento.
Operated by: Cargill of California, Inc., as a public utility.
Use: Bulk-grain facility.
Construction: Concrete and steel silos; concrete with timber fender piles; length 600 ft. (182.9 m.).
Water depth: 32 ft. (9.8 m.).
Storage capacity; 1,250,000 bushels (30,000 tons); 17 concrete silos; total capacity 500,000 bushels; 6 steel silos; total capacity 750,000 bushels.
Mechanical handling facilities: Conveyor system to storage facility.

Wharf 6:
Owned and operated by: Port of Sacramento.
Use: General cargo and containers.
Construction: Concrete with timber fender piles; length 600 ft. (182.9 m.)., apron 60 ft. (18.3 m.).
Water depth: 30 ft. (9.1 m.).
Mechanical handling facilities: 2 gantry cranes, 45 tons each.
Remarks: 6 acres of open wharf; 70,000 sq. ft. off dock warehouse.

Wharves 7-8:
Owned and operated by : Port of Sacramento.
Use: Bulk-material facility and general cargo.
Construction: Concrete with timber fender piles; apron 60 ft. (18.3 m.), length 600 ft. (182.9 m.).
Water depth: 30 ft. (9.1 m.).
Storage capacity: Covered 75,000 tons, open 850,000 tons.
Mechanical handling facilities: Conveyor-belt system from truck to storage, from ship to storage; from storage to ship, or from storage to truck; 2 gantry cranes.
Loading rate: 600 t.p.h.
Transit shed: 86,400 sq. ft. Bagging facilities for bulk cargoes.
STEVEDORES: Same as San Francisco.
MEDICAL: All normal medical facilities available.
DENSITY: Full fresh.
FRESH WATER: Available at all berths.
FUEL: All grades available with 24 hours notice. Delivered by barge.
GANGWAY/DECK WATCHMEN: Each ship shall have a security detail in readiness on board at all times it is in port. The security detail shall perform tasks of an emergency nature and shall have information concerning cargoes aboard in case of need for fire fighting purposes.
OPENING/CLOSING HATCHES: Opening/closing hatches is stevedore work while docked in port.
IDENTIFICATION CARDS: A pass signed by the Master or his designated officer will be required for crew members, passengers and their personal property to leave the port's fenced area. Property may be subject to physical inspection before leaving the fenced area.
CONSULS: Nearest at San Francisco.
REPAIRS: Limited repair facilities available.
REPATRIATION: Can be arranged through local Agent.
AIRPORT: 16 miles from port and served by regular airlines.
TIME: GMT minus 8 hours.
HOLIDAYS: Only days not worked are 4th and 5th July, Christmas Eve and Day, New Year's Eve and Day.
POLICE/AMBULANCE/FIRE: Tel. 371-8000. Extensions 252 and 228.
TELEPHONES: Telephones are available.
SHORE LEAVE: Crew members allowed ashore subject to Immigration clearance.
GENERAL REGULATIONS: Ships will not blow boiler tubes while in port. Bilge water or oil will not be discharged into harbour. Accidents will be reported immediately to the Terminal Superintendent. Splash boards will be placed over disposal vent-pipe openings on inboard side of vessel.

Garbage – United States and California State laws make it unlawful to dispose of ship's garbage except in approved ways. Port makes approved garbage disposal available – contact the Terminal Superintendent. Garbage retained on board must be kept in tightly closed containers.

Smoking – Smoking prohibited in and around cargo compartments, and on open decks except that it may be permitted in marked areas under sheltered portion of weather decks on offshore side. Smoking prohibited on wharfs and piers except in marked areas. Smoking prohibited on or near ship while it is bunkering.

Welding/Burning – Welding or burning will not be done until written approval is obtained from the Terminal Superintendent and the Fire Marshal. All requirements of both the Superintendent and Marshal will be strictly adhered to.

Fire Signal – Upon detection of a fire, regardless of location or size, the alarm of fire will be sounded. The alarm shall be sounded by telephone and/or whistle or siren blasts. 5 each, 5 second blasts repeated as necessary.
AUTHORITY: Sacramento-Yolo Port District.

AGENT: See "San Francisco".

SAN DIEGO, California: 32.41 N. 117.07 W.

(See Plan Book)

PORT LIMITS: The seaward boundaries of the port of San Diego at which a vessel is considered to be an "arrived vessel" is that time when the vessel is boarded by a Port Pilot at Seabuoy No. 1 and (subject to charter party terms) lay time commences when notification of readiness is tendered at berth.
DOCUMENTS:
Crew Lists.
Passenger Lists.
Customs Documents.
Manifests.
Stores Lists.
Crew Curio Declaration List.

If the vessel arrives from foreign direct, 3 copies each of the above documents are required.

If the vessel movements are between U.S. ports, 2 copies each of the above documents are required.

Health Documents. Arrival from foreign direct, 1 copy only. All crew members should be in possession of valid vaccination certificates.

Manifests. Arrival from foreign direct, 1 copy of travellers manifest which remains with vessel, and 3 copies each of U.S. Customs inward foreign manifest. Bills of lading, ship's papers carried aboard vessel varies with steamship companies.

PILOTAGE: The San Diego Pilots do not maintain Pilots on station. Service is rendered according to ETA received from vessel. If any vessel's arrival or departure is delayed over 1 hour, an additional charge will be made. Telegraphic address of pilot station – radio ETA to "Pilots", San Diego. Advance notice of ETA required – 24 hours prior to arrival of vessel. Pilot boat is 54 ft. in length, painted white. The exact area where Pilot boards the vessel is No. 1 sea buoy.

ANCHORAGE: 3 miles S.E. of Point Loma Light.

MAX. SIZE: Length, breadth – no restrictions. Max. draft alongside face of terminal, 36 ft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to San Diego Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: All radio messages go through the Los Angeles station for relay.

TUGS: Tugs normally join vessel approximately 1 mile before berth. 5 available with h.p. ranging from 200–1,700. There is no charge for the use of tug's lines.

CONTAINER FACILITY: A new generation, high-speed, all-electric container crane capable of handling 20 ft. and 40 ft. units, or single hook lifts of 40 long tons at National City Marine Terminal. This 17.4 acre facility will include 32,500 sq. ft. for a container freight station, a container steam-cleaning facility, office, maintenance shop, truck scales, railroad spur, and paved storage for 2,280 containers including electrical outlets for 45 refrigerated containers. Depth 35 ft.

SPECIALISED CARGO HANDLING FACILITIES: High-speed bulk-loading facilities exist with 800 ft. of 37 ft. deep water berthing space and bulk storage for 13,600 metric tons, plus a bulk loader boom that travels 500 ft. laterally and can be extended or raised enough to load nearly any size or type of ship.

High-speed bagging of bulk commodities is available for bagging of bulk materials from powder to pellets at the rate of 1,000 tons per 8-hour shift.

STEVEDORES: Advance notice of 24 hours desired in order to arrange gangs.

MEDICAL: Agents should receive notification of medical attention required 24 hours prior to ETA of vessel. Complete hospital facilities available.

TANKERS: Diameter of load/discharge line 6 to 8 in. Slop (residue) discharge facilities available upon request. 2 tanker berths – max. draft 30 ft. There are also 2 new Tanker Berths at National City Marine Terminal with 12 in. discharge lines.

DENSITY: Salt water in bay.

FRESH WATER: Fresh water available, delivery via pipeline.

FUEL: Diesel and bunker fuel available.

GANGWAY/DECK WATCHMEN: Available if considered necessary.

OPENING/CLOSING HATCHES: Carried out by stevedores.

CERTIFICATES: Registered Load-line Certificate, Certificate of Inspection, Safety Certificate.

CUSTOMS ALLOWANCE: Tobacco: Per each crew member U.S. Customs allowed 2 cartons of cigarettes and 1 box of cigars. Wine and/or Spirits: Quantity allowed per each crew member – 1 quart.

CARGO GEAR: Up-to-date certification of all cargo gear required in order to comply with Pacific Coast Marine Safety Code.

IDENTIFICATION CARDS: U.S. Immigration requires completion of Form 95, U.S. Coast Guard requires landing permits.

CONSULS:

Chile
Costa Rica
Denmark
Dominican Rep.
Ecuador
El Salvador
Finland
France
Honduras
Italy
Mexico
Netherlands
Norway
Panama
Peru
Sweden
West Germany

REPAIRS: All types of deck and engine repairs are available.

DRY DOCKS: Largest dry dock 700 ft. length, 104 ft. width. Capability can accommodate C–2 mariner type or San Diego type hulls (600 ft. length, 85 ft. width) and up to and including 28,000 displacement tons. 4 additional floating dry docks with capabilities up to and including 3,500 displacement tons.

AIRPORT: Distance from marine terminal approximately 5 miles. Airport is serviced by major airlines.

TIME: Local time GMT minus 8 hours. Daylight Saving Time becomes effective the last Sunday in April and continues to the last Sunday in October.

HOLIDAYS: Recognised holidays are: New Year's Day; Lincoln's Birthday; Washington's Birthday; Memorial Day, Independence Day, Labour Day, Columbus Day, Veteran's Day, Thanksgiving Day, Statewide Election Day, Christmas Day, or any other legal holiday that may be proclaimed by State or National Authority; when a holiday falls on a Sunday, the following Monday shall be observed as a holiday.

POLICE/AMBULANCE/FIRE: Police 238–7373; Emergency Ambulance 238–7373; Fire 238–1212.

TELEPHONES: Arrangements exist for placing telephones on board. No charge for hooking up.

SERVICES: Tank-cleaning equipment. Facilities for tank washings Compass and radar adjustments, etc.

SHORE LEAVE: Permitted.

DEVELOPMENTS: Broadway Pier has been reconstructed for use as a passenger vessel facility, public park, for berthing of public visit Naval vessels, and for berthing and clearance of fishing vessels. U.S. Customs has an office at the end of the pier.

AUTHORITY: Port of San Diego.

AGENT: See "Los Angeles".

SAN FRANCISCO, California: 37.48 N. 122.25 W. (See Plan Book)

DOCUMENTS:

General Declaration (arrival) on Customs Form 1301.

Cargo Manifest (Customs Form 7257 A or 7527 B). One original copy indicating all the cargo on board, used for making formal entry. One copy listing all cargo on board, to be used by the Customs Inspector. One copy indicating cargo for this port only.

2 copies of Crew's Effects Declaration on Customs Form 1304.
2 copies of Ship's Stores Declaration on Customs Form 1303.
2 copies Passenger List (Form I 418).
2 copies Crew List (Form I 418).
1 Copy "Oil Pollution Certificate", issued in Washington D.C.

Customs boarding officer will also examine ship's register and Load-line Certificate. In addition, the following documents will be required for formal entry to be made within 48 hours of arrival from abroad, or 24 hours of arrival from abroad, or 24 hours of arrival from a U.S. port:

(a) Health Pratique.
(b) Master's Oath (Customs Form 1300).
(c) U.S. Certificates of Payment of Tonnage Tax (Customs Form 1002).
(d) Certified Crew List (U.S. vessels only).

PILOTAGE: Pilotage in and around Golden Gate Region is provided by 3 groups of experienced, licensed ship Pilots. California Inland Pilot Association, Redstack Tugs and Independent Pilots.

The San Francisco Bar Pilots' Association, maintains a sea station 12 miles outside the Golden Gate, in the vicinity of the large navigation buoy for vessels arriving and leaving the area.

On station around-the-clock. Pilot boats are equipped with VHF radio-telephone, and maintain continuous watch for ship traffic and operate co-operatively with the Marine Exchange communication centre and lookout station. The Bar Pilots also carry portable VHF radios.

Some 8,500 ships are piloted annually into and out of the port complex, through the Golden Gate and the 2,000-ft. wide, 55-ft. deep main ship channel across the alluvial sand bar about 9 miles outside the Gate.

Considerable Summer fog is experienced on the pilot grounds. In Winter months radiation or tule fogs frequently occur. The tidal prism of hundreds of square miles of inland waters cause unusually swift and changing currents in the area. Pilotage for San Francisco Bar and entrance is compulsory and available 24 hours a day. The Pilot boat is at a station 3 miles outside Main ship Bar channel about 14 miles from San Francisco, VHF Channels 18A and 10 for radio contact. Vessels with a draft of 42 ft. or more are requested to arrive at the Pilot station for the inward passage about one hour before high water at the Golden Gate Bridge.

ANCHORAGE: Several anchorages available in San Francisco Bay for any type of vessel up to 50 ft. draft.

The well-protected bay affords excellent shelter and anchorage in all weather. The Captain of the Port (Coast Guard) will assign an anchorage to a vessel upon request. In San Francisco and San Pablo Bays, there are a large number of anchorages available for naval, quarantine, general and explosives.

The specific anchorages available include:

1. *General Anchorage*

(a) No. 5 – found just South of the Richmond-San Rafael Bridge, has no limitations.

(b) No. 9 – found in the South Bay, also has no limitations.

2. *Temporary Anchorage*

(a) No. 7 – found off Treasure Island, has a 12 hour limit. A ship cannot lighter nor bunker at this mooring.

No. 8 – same as No. 7 but has a 6 hour limit.

3. *Explosive Anchorage*

No. 12 – is normally not activated.

No. 13 – found off Larkspur, this mooring is activated only as the need arises.

No. 14 – found in the South Bay, this mooring is always activated.

4. *Naval Anchorage*

No. 10 and No. 21 are the most frequently utilised.

RESTRICTIONS: The San Francisco Bay region is the first on the West Coast to have sea lanes established by the Coast Guard for greater safety in its ocean approaches. Use of the lanes is not mandatory, but is strongly recommended to reduce chance of ship collisions in congested approach and departure areas. The lanes are not intended to supersede or alter applicable rules of the road.

The lanes begin within 6 miles of the San Francisco Lightship, with each lane inbound and outbound separated by a buffer zone. The headings are: North lane outbound, 305°: North lane inbound

120°, main line outbound, 247°; main line inbound, 058.5°; Southern lane outbound, 169°; Southern lane inbound 343°.

The size of the bay and the narrowness of the Golden Gate cause tricky and sometimes difficult tidal and current conditions. The flood current sets into all parts of the bay and causes swirls as far East as Alcatraz and Angel Islands. At the San Francisco-Oakland Bay Bridge there are large current eddies near the foundation piers which may require care to maintain proper course.

The bar channel is dredged to 55 ft. MLLW by the U.S. Army Corps of Engineers. Entrance channels to the various ports are dredged to 35 ft., with the exceptions of Sacramento, Stockton and Redwood City, which are 30 ft. Stockton, however, is approved for a 5-ft. deepening, and study of similar deepening for Redwood City is being completed.

MAX. SIZE: The max. permissible draft for tankers at the oil installation is 35 ft., for regular freighters and passenger ships at the San Francisco piers is 30 ft. No restrictions on length or berth. The best time to dock with max. draft is at a rising tide.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to San Francisco Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Radio station via RCA – Radio Corporation of America – Station KPH ITT – World Communications – Station KFS.

Safe and efficient navigation for all bay vessel traffic is maintained through a Ship Location and Reporting Service operated by the Marine Exchange. U.S. Coast Guard Vessel Traffic Service on Yerba Buena Island and at Port Bonita maintains 24 hour radar surveillance of all traffic from Golden Gate on the West (with 32 mile capacity beyond) to Oakland on the East, Dumbarton Bridge on the South and Port San Pablo on the North. Vessel Movement Reporting System (VMRS) extends beyond Port San Pablo all the way to the Ports of Stockton and Sacramento. Coast Guard urgently requests that all vessels as specified below, moving anywhere within the VMRS (including all area under radar surveillance), tune to Channel 13 (156.65 mHz., VHF FM): All ships of 300 gross tons and over, passenger ferries for hire over 100 gross tons, and tugs with tows of barges or dredging rigs of over 26 ft. length.

TUGS: Tugs available and normally join the vessel when approaching their pier. Tug's lines are always used, with no extra charge.

BERTHING: No restriction on berthing other than draft limitation and preferable at slack water.

Pier	No. of Berths	Length (ft.)	Depth (ft.)	Remarks
9	2	154 Face 800 North 800 South	35	Mooring for tugboats
15-17	3	490 F 800 N 800 S	35	Importing newsprint
19	2	160 F 800 N 800 S	35	General cargo Foreign Trade Zone No. 3
23	2	160 F 800 N 800 S	35	General cargo Foreign Trade Zone No. 3
27 and 29	3	206 F 750 N 1,340 S	35	General cargo (some containers)
31	2	150 F 788 N 589 S	35	General cargo
33	2	150 F 787 N 807 S	35	General cargo
35	2	200 F 802 N 1,053 S	38	General cargo and passenger
39	2	140 F 878 N 937 S	35	Inactive
45 A-C	2	140 F 1,314 S	35	Inactive
45 B-D	1	140 F 1,314 S 1,200 N	35	Inactive
26	2	200 F 620 N 635 S	50 35 35	General cargo Government meat inspection facility
28	2	150 F 541 N 675 S	35	Ship Repair
30 and 32	3	622 F 845 N 932 S	35 35 35	General cargo (Some containers)
34	2	139 F 634 N 652 S	30 35 35	Inactive
46 A	1	201 F 802 N 679 S	30 35 35	Helicopter
46 B	2	1,035 F	35	Inactive
48 A	1	216 F 610 N	35 35	Newsprint and pulp
48 B	1	155 F 636 S	35 35	Newsprint and pulp
60		740 F 866	32 20	Small boat repair
64 North	2	48 & 130 F 408 & 240 N 719 S	30 25 25	Inactive
64 South	2	126 F 588 N 852 S	25 25 20	Inactive
70 and 72	2	723 F 1,100 F	38 38	Importing automobiles Processing automobiles
92	1	702 F 166	35 35	Receiving automobiles, Bulk animal and vegetable oils

Alameda: (See Plan Book). (Not part of the Port of San Francisco). Alameda, an island and city across the Inner Harbour channel from Oakland, is the home of Encinal Terminals, the largest privately owned and operated steamship terminal in the United States. There are 6 berths for vessels at Encinal.

Berths 1, 2, 3 and 4: Used for general cargo and bulk or drummed liquids. Total berthing length 2,125 ft. Depth 31 ft.

Berth 5: Used for general and containerised cargoes. Length 750 ft. Depth 35 ft. Berth equipped with Paceco container crane.

Berth 6: Used for receipt and shipment of bulk or drummed liquids. Depth 30 ft. Facility has tank storage of 12 million gallons.

Agent: See "San Francisco".

BULK HANDLING FACILITIES: *Copra Terminal, Pier 84:* Pier assigned to Cargill Company for receiving bulk copra. Berthing for 1 vessel. Length of face 185 ft. and 430 ft. North side 120 ft. Depth alongside face 32 ft. Facilities include 4 portable pneumatic unloaders, total capacity 180 t.p.h.

Port of San Francisco Grain Terminal, Pier 90: Berthing for 2 vessels. Length 1,285 ft. Depth alongside 40 ft. The terminal is used for receiving, storing and loading of grain, feeds, chemicals, fertilisers and storing automobiles. Facilities consist of a 2 million bushel grain elevator. Rail holding yard for 100 cars. 6 marine loading spouts with capacity of up to 1,500 tons of bulk material per hour (no shifting required).

CONTAINER HANDLING FACILITIES: *Mission Rock Terminal, Pier 50:* Berthing for 4 vessels. Pier used for container traffic, general cargo and passengers. Length of face 1,000 ft. North side 1,480 ft. and South side 1,100 ft. and 582 ft. Depth alongside terminal 35 ft. Facilities include a 250-ton container crane rated at 25 containers per hour. Container wharf length 1,000 ft. and width 200 ft. Storage for 900 (20 ft.) containers on pier.

Pier 80: Berthing for 7 vessels. Length of face 1,296 ft. North side 1,138 ft. South side 2,657 ft. Depth alongside 40 ft. Pier equipped with two, rail-mounted container cranes (each having a 30-ton capacity); 270 refrigeration outlets; container freight station and flexibilities to handle Ro-Ro, container and breakbulk cargoes.

Pier 94: New one-berth (716 ft. apron) container facility with 40 ft. alongside depth, 2×30-long-ton container cranes, and 16.5 acre container yard, with at least 50 acres available for expansion. Apron and crane rails are extensions of Pier 96 immediately to the South.

Pier 96: Berthing for 2 vessels. Depth alongside 40 ft. The facility is used by container ships and LASH vessels. It also has flexibilities to handle Ro-Ro and general cargo ships. Lifting equipment consists of 2, rail-mounted, Paceco container cranes, forklifts, straddle carriers and mobile cranes. Other features include 230 refrigeration outlets; a LASH lighter freight station; lighter basin; elevated control tower with radio and P.A. communications system; computerised container inventory control and a container freight station.

STEVEDORES: Stevedores orders must be placed 1000 hrs. for night gangs and day gangs. 2×8-hour shifts 7 days a week. Sunday and Sunday night gangs must also be ordered on Saturday 1000 hrs.

MEDICAL: Medical, and all hospital facilities available. No advance notice required.

TANKERS: All major oil companies have their own oil discharging piers which are outside the jurisdiction of the Port Authority. Reducing pieces are available. The max. drafts are 35 ft. Tankers arriving with a greater draft are partly discharged in the bay before docking.

Davis Point: Union Oil Co. Oleum Refinery Wharf, depth up to 38 ft. MLW.

Martinez: Shell Oil Co. Wharf, depth alongside 30 to 42 ft. MLW. Phillips Petroleum Co. Amorco Wharf, 2 berths, depth 30-42 ft. MLW. Phillips Petroleum Co. Avon Wharf, depth alongside 35 ft. MLW. Urich Oil Co. depth alongside 35 ft.

Ozol: Oil Wharf, depth alongside 39 ft. MLW.

Hercules; Sequoia Ref. Corp. Terminals, depth 35 ft. MLW.

DENSITY: Average density in the bay is 1016.

FRESH WATER: Available at all piers rate between 25 and 50 t.p.h.

FUEL: Fuel available by barge or at the oil companies own pier. Special blends require some advance notice.

FIRE PRECAUTIONS: Any special instructions are given to the Master upon docking.

GANGWAY/DECK WATCHMEN: Not required but this service available at Master's request.

OPENING/CLOSING HATCHES: Normally done by stevedores. But crew may open and close before arrival at the dock or after departure.

CUSTOMS ALLOWANCE: Each crew member may land free of duty and/or taxes articles acquired abroad not exceeding $10 in value, plus 50 cigars or 300 cigarettes or 3 lb. of smoking tobacco, and not over 1 quart of alcoholic beverages.

IDENTIFICATION CARDS: Standard U.S. Immigration Forms I.-95 to be made up for each crew member on arrival. Not necessary for crew man already holding Form I.-95, issued for the same vessel.

CONSULS: All Maritime countries represented at San Francisco.

REPAIRS: The major yards in the Golden Gate region have fully equipped machine-shop facilities capable of handling virtually any job; welding, heavy plate construction, turning, boring, facing, grinding, milling and rolling.

The larger yards also have facilities for pipe, sheet metal, electrical, carpentry, painting, rigging, machining and boiler work.

Pacific Ship Repair and Triple "A" Repair are both located in San Francisco and provide berth space for all types of ship repairs at plant and at any location in the San Francisco Bay area.

DRY DOCKS: Bethlehem Steel's San Francisco shipyard has 3 floating dry docks, 1 with 22,000 tons capacity and 654 ft. long, 1 of 11,400 tons capacity and 542 ft. long, and 1 of 6,500 tons capacity and 450 ft. long. With a recently completed pier, its tie-up and outfitting space totals 4,271 ft.

Todd Shipyards Corp. has 2 dry docks at Alameda. Their larger dry dock is 873 ft, long with a clear width between wing-walls of 140 ft. and a lifting capacity of 40,000 tons. The smaller dry dock has a lifting capacity of 10,000 tons and is 542 ft. long with a clear width between wing-walls of 86 ft. There are 3,500 ft. of berthing space for ships undergoing in-the-water repairs. Todd has 3 mobile units for out-of-yard work.

Williamette Iron and Steel Company's yard in Richmond has 5 concrete graving docks. 4 of these docks can each accommodate a vessel 600 ft. long with 83 ft. beam, and 1 dock can handle a vessel 750 ft. long by 83 ft.

Tonnage capacity is limited only by the above dimensions. Williamette's facilities include 1,500 ft. of concrete outfitting pier for in-the-water repairs. The graving docks are served by 4 gantry cranes of 60-ton capacity and 2 of 45-ton capacity, and the outfitting pier by 3×45-ton cranes. Williamette has fully equipped shops for repair and conversion work, and mobile units for out-of-yard work at all Bay Area piers.

Hunters Point Naval Shipyard: (Triple A Machine Shop) Under lease from the US Navy, graving docks and repair facilities available to all types of ships. Triple A operates 3 graving docks: (No. 4) 200 ft. beam×1,100 ft. length and 50 ft. depth; (No. 3) 150 ft.×1,000 ft. and 39 ft. depth; (No. 2) 100 ft.×800 ft. and 27 ft. depth, 17 repair berths can serve ships of any length. 12 gantry cranes of 50 ton capacity serve graving docks and repair berths. 50 ft. depth channel from Golden Gate to Hunters Point; unique to West side of San Francisco Bay.

DEVELOPMENTS: The channel over the bar has been deepened to 55 ft. A new channel will be cut 600 ft. wide and 45 ft. deep (at low water), through the upper bay and the channel through San Pablo and Suisun Bays will be deepened to 45 ft. Manoeuvring areas near Richmond and the refinery terminals will be widened. The Stockton Deep Water Channel will be deepened to 35 ft. and the channel alignment improved.

REPATRIATION: All facilities available for crew changes by sea, air or land.

AIRPORT: Distance about 10 miles South of San Francisco and is served by most domestic and international passenger airlines plus 20 international air cargo carriers..

TIME: GMT minus 8 hours, Summertime from last Saturday in April till last Saturday in October GMT minus 7 hours.

HOLIDAYS: New Year's Day; Lincoln's Birthday (February 12th); Washington's Birthday (February 22nd); Good Friday (afternoon); Memorial Day (May 30th); Independence Day (July 4th); Labour Day (1st Monday in September); Admission Day (Calif. only Sept. 9th); Columbus Day (October 12th); Veteran's Day (November 11th); Election Day (1st Tuesday after the first Monday in November); Thanksgiving Day (last Thursday in November); Christmas Day.

When any of the holidays fall on Sunday, the holiday will be observed on Monday.

On a holiday the longshoremen are working at the overtime rate (time and a half) except on the following days when no work will be performed:

1. New Year's Day;
2. Bloody Thursday (July 5th, memory of 3 longshoremen killed during the 1936 strike);
3. Labour Day;
4. Thanksgiving Day;
5. Christmas Day.

POLICE/FIRE/AMBULANCE: Police, tel. 533-0123; Fire, tel. 861-8020; Ambulance, tel. 431-2800.

TELEPHONES: On some piers telephone connections to ships are available, no extra cost for this service.

GENERAL: Vessels arrival has to be reported to the U.S. Coast Guard 24 hours prior arrival by Agent.

SHORE LEAVE: Crew members are allowed to go ashore after passing U.S. Immigration at first U.S. Port.

AUTHORITY: San Francisco Port Commission.

AGENT: Cascade Shipping Co., 550 Miner Road, Orinda, California 94563. Phone: 415-254-1030. Telex: TWX 910-482-8477. Cables: "Caship".

SAVANNAH, Georgia: 32.02 N. 81.07 W.

(See Plan Book)

DOCUMENTS:

3 Crew Lists.
3 Store Lists.
3 Curio Lists.
3 Manifests.
3 Passenger Lists.

These documents required in order to enter vessel at U.S. Customs.

Direct Foreign Arrival – Quarantine Pratique issued by Public Health Service representative; Cargo on Inward Foreign Manifest Form 7527 A or B or substantially similar form, in duplicate with abstract manifest of Savannah only cargo; Crew list on Form I-418, in triplicate; Passenger List on Form I-418, or other acceptable form, in triplicate; Crew curio list, in triplicate, with crew declaration on Form 5123, or crew list on Form I-418, in triplicate, with numbers of attached Forms 5129 endorsed thereon; List of sea stores and ship's stores, in triplicate; for American vessels, repair declaration on Form 3415; for American vessels, certified crew list; Clearance from last foreign port, if one issued.

Coastwise arrival with Residue Foreign Cargo or Passengers – Form 1385, "Permit to Proceed", in duplicate; Travelling Manifest; Abstract Manifest, in duplicate, of cargo to be discharged in Savannah – if none, 2 "pro forma" manifests; Stores list, in duplicate; Crew list, in duplicate; Crew purchase list, in duplicate, and any crew declarations on Customs form 5123 for Savannah; Passenger list, in duplicate, if passengers are disembarking in Savannah.

PILOTAGE: Savannah Pilots' Association, 204 East Bay Street, Savannah, Georgia, 31401 (telegraphic); Pilot required all vessels; ETA 24 hours advance notice, change ETA 8 hours; VHF Channel 16 (monitored at all times), 18, 12, 13 – Radio telephone 2182 and 2738. Pilot boards vessel 1 mile outside fairway buoy.

SHIP CHANNEL: *Project depth and widths are as follows:* Sea buoy to jetties 40 ft. depth×600 ft. width; New Channel Range through Upper Flats Range 38 ft. depth×500 ft. width; The Bight Channel 38 ft. depth×600 ft. width; Fort Jackson Range to Wreck Channel 38 ft. depth×500 ft. width; City Front Channel to Kings Island Channel 38 ft. depth×400 ft. width; Whitehall Channel 36 ft. depth×400 ft. width.

ANCHORAGES: Outside fairway buoy North and N.E. of fairway buoy; no anchorages in river.

RESTRICTIONS: 29 ft. at any time; over 29 ft. on incoming tide, no restrictions day or night.

MAX. SIZE: Abbreviation OT: Ocean Terminal. Vessels berthing at OT 10 A/B and OT 12 A/B should not exceed 550 ft. length and 26 ft. draft. For berths OT 14–15–16–17 vessels 550 to 600 ft. on slack water; vessels less than 550 ft. any time to berths 14 and 17; vessels docking or undocking at OT 15–16, with vessels in OT berths 14 and 17, can be docked or undocked during slack water. Vessels entering Stevens Terminals should not exceed 525 ft.; max. of 550 ft. could be handled under ideal conditions, i.e. slack water and all berths clear in slip. Vessels over 500 ft. undocking from berths 35–37–41–42, Stevens Terminals, should not be undocked during strength of ebb or flood tide, but may be undocked at or near high or low water slack. Vessels berthing at river front berths: vessels up to 650 ft. will be handled any time and vessels from 650 to 900 ft. on tide conditions; vessels will be handled at whatever drafts Bar Pilots will bring them in or out. Also see "Developments".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Miami Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Vessels route ETA cables to Agents, etc., via Radio Lantana.

TUGS: Tugs join vessels at city front for berths above city; for berths below city, tugs usually meet vessels in vicinity of Fort Jackson or well below berth. Tugs' lines used all times.

BERTHING: The Georgia Ports Authority operates 19 general cargo berths, 2 tanker berths, 3 container berths, 2 dry bulk cargo berths, and a LASH facility.

CRANES: Ocean Terminal – Two 50-short ton gantry cranes; Garden City Terminal – Two 35-short ton gantry cranes, two 30-short ton gantry cranes, two 45-short ton container cranes, Garden City Terminal (Container Central) – four 45-short ton container cranes, six 45-short ton rubber tyred bridge cranes. Other cranes, floating and mobile, are available from various private contractors.

BULK CARGO FACILITIES: Located at the Georgia Ports Authority's Garden City Terminal are 2 dry bulk cargo berths (1 loading and 1 discharge berth). This facility is suited for the handling of various ores, grains, peanuts, meals and fertilizer materials. The storage at this facility consists of silos for the storage of grain and grain type products as well as flat floor storage for these various other materials.

SPECIALIZED CARGO HANDLING FACILITIES: Located at Container Central, on the up-river end of berth 60, is an adjustable ro-ro ramp which is situated as to allow a vessel to utilize the ro-ro ramp and container cranes at the same time. This ramp has a design capacity of 600 tons on the centre or 300 tons anywhere on the ramp or deck with the weight of the load properly distributed. At the Garden City Terminal there is a modern cold storage facility. The refrigerated space consists of 3 rooms of approximately 28,000 sq. ft.

BRIDGES: *Eugene Talmadge Memorial Bridge:* 135 ft. vertical clearance for 400 ft. at MHW.

STEVEDORES: In order to order gangs Agent should receive ETA from vessel no later than 1300 hrs. day prior to arrival, when vessel coming coastwise. When calling at Savannah from a foreign port Agent normally receives ETA 72 hours and again 24 hours prior to arrival.

MEDICAL: Agent should be advised as far in advance as practicable for required medical attention. U.S. Public Health Clinic in Savannah, also other extensive medical facilities. Standard information required as to inoculations, vaccinations, etc.

TANKERS: Standard requirements on diameters of load-discharge lines. No facilities for slop (residue) discharge facilities except American Oil Company. S.G. & A.P.I. of local types of oil is 36 gravity marine diesel fuel. 6 tanker berths in port, max. drafts range from 32 ft. – 36 ft.

DENSITY: Average density of water at 20° Centigrade in channels of Savannah Harbour are:

	High Water	Low Water
Savannah River Entrance		
Surface	1.0196	1.0090
Bottom	1.0196	1.0181
Port Area		
Surface	1.0022	0.99915
Bottom	1.0120	1.0075

FRESH WATER: Available at all terminals. Charge $1.05 per ton with a minimum charge of $15.75 for each service.

FUEL: Light marine diesel fuel (No. 2 Fuel), heavy marine diesel fuel (No. 4 Fuel), all Intermediate grades from Intermediate 2 (equals 200 secs. Redwood 1 scale at 100° F.) through No. 30 (equals 3,000 secs. Redwood 1 scale at 100° F.), Bunker "C" Fuel (No. 6 Fuel). All above grades available in either bonded or domestic except light marine diesel, which is domestic only. Advance notice required 24 hours.

FIRE PRECAUTIONS: No special fire precautions. All tanker berths have water and fire extinguishers on dock. Fire fighting equipment on dock. Fire fighting equipment on tugs.

DEVELOPMENTS: Presently being contracted are two 125-short ton gantry cranes to be erected at the Ocean Terminal.

GANGWAY/DECK WATCHMEN: Garden City and Ocean Terminals of Georgia Ports Authority require that a watchman, or someone in authority, will be aboard any vessel tied to their facilities at all times. Seaboard Coast Line Terminal watchman furnished by Steamship Company if watchman required. The Stevens Shipping and Terminal does not require a watchman.

OPENING/CLOSING HATCHES: By crew if mechanical; by stevedores if not mechanical.

CERTIFICATES: See "Documents". Current Registry Papers, Load Line Certificates, Certificates of Inspection, etc., are required.

CUSTOMS ALLOWANCE: Tobacco, a crew member may take ashore 50 cigars, 300 cigarettes, or 3 pounds of smoking tobacco, or a proportionate amount of each. An appropriate amount of tobacco products may be held out of bond for use of passengers and crew members while aboard ship when in port. Wine and/or Spirit, a crew member may take ashore one quart of alcoholic beverages for his own use. Container should be opened, that is the seal should be broken. An appropriate amount of wine and/or spirits may be held out of bond for consumption by passengers and crew while aboard ship when in port.

CARGO GEAR: Certified in accordance with U.S. Department of Labor Regulations. Supplied by stevedores.

IDENTIFICATION CARDS: Identification required by crew members coming ashore. U.S. Immigration & Naturalisation Service issues landing permit, Form I-94, to any crew member of a foreign vessel who is not considered a security risk. This form must be in man's possession any time he is ashore.

CONSULS: The following countries are represented in Savannah:

Brazil
Costa Rica
Dominican Rep.
France
Germany
Italy
Norway
Sweden
Venezuela

REPAIRS: All types of deck and engine repairs possible at Savannah Machine and Shipyard Company. Deck repairs from Diamond Manufacturing Company.

RADAR/VHF REPAIRS: Marine Industrial Electronics has qualified radar and RDF, also VHF men available. They can be contacted through ship's Agents or through the Pilots or Atlantic Towing if vessels should require service on arrival.

DRY DOCKS: Savannah Machine & Shipyard Drydock 540 × 72 × 21 ft.

REPATRIATION: Responsibility of Owner's Agents. Can be arranged to all points.

AIRPORT: Savannah Municipal Airport regularly served by Delta Air Lines with 13 scheduled flights daily and National airlines with 5 flights daily. Charter service also available. Distance to Garden City Terminal approximately 5 miles, to Ocean Terminal approximately 7 miles, and to Stevens Terminal and SCL Terminal approximately 9 miles.

TIME: Savannah maintains Romeo or Eastern Standard Time GMT minus 5 hours, from 0200 hrs. the last Sunday in October, to 0200 hrs. the last Sunday in April. Quebec or Eastern Daylight Saving Time GMT minus 4 hours maintained from April to October.

HOLIDAYS: New Year's Day (January 1st); Martin Luther King's Birthday (January 15th); Lincoln's Birthday (February 12th); George Washington's Birthday (February 22nd); Memorial Day (May 30th); Independence Day (July 4th); Labour Day (First Monday in September); Columbus Day (October 12th); Armistice Day (November 11th); Thanksgiving Day (Fourth Thursday in November); Christmas Day (December 25th); Good Friday.

No work will be performed on New Year's Day, Independence Day, Labor Day, and Christmas Day.

POLICE/AMBULANCE/FIRE: Police, City: 232-4141 and 233-9321, County: Police: 352-7780; Ambulance: Fields and Sons Ambulance Service, 233-0191, Fire: City: 232-5121.

TELEPHONES: G.P.A., Garden City and G.P.A., Ocean Terminals: telephones on board can be provided through local Agents. Stevens Shipping & Terminals – not available to ship (phones on dock). S.C.L. Terminal – not available to ship (phones on dock).

SERVICES: Compass Adjusting, Coste Compass Adjusters, 121 East 63rd Street, Savannah, Georgia 31405, Tel. 355-9607.

Radar, RDF, VHF, Marine Industrial Electronics, Inc., Savannah Industrial Park, Savannah, Georgia, Tel. 232-3489.

SHORE LEAVE: Crew members are allowed ashore provided they are not detainees.

DELAYS: With reasonable advanced notice of ETA no delay anticipated in berthing, loading, discharging or bunkering.

AUTHORITY: Georgia Ports Authority. Stevens Shipping & Terminal. Savannah Port Authority.

The Savannah Port Authority does not operate terminals; however, is engaged in port and industrial development for the City of Savannah and Chatham County, Georgia. Harbour regulations pier and bulkhead lines, etc., come under the jurisdiction of this organisation.

SEARSPORT, Maine: 44.28 N. 68.56 W.

(See Plan Book)

DOCUMENTS:

1 Crew List.
1 Passenger List.
2 Stores Lists.
2 Foreign purchases Lists.
2 Inward foreign Manifest uniform cargo.
Original Bill of Lading.
1 Form 3251 Masters oath on entry vessel.
2 Form 1374 outward foreign Manifest.

PILOTAGE: Ship's agent notifies Pilot approximately 48 hours in advance of arrival, correcting at 24 hours. Pilot's boat called on Channel 16 and 13 VHF. Pilot boards at Monhegan Island, W.B. 14 m. When weather bad, suggest vessel heaves-to at 43° 45.3′ N. 69° 22.5′ W.

Shipmaster's Report: There is a second pilot station for ships approaching from the East.

The pilot station is located on Matinicus Rock Island. Pilot boards at Wooden Ball Light Bell Buoy "2WB." Lat. 43° 49′ N. Long. 68° 50′ W.

The pilot boat is a fishing boat with a white hull showing the international signals.

Pilot signal: 3 long and 2 short on ship's whistle.

Radio contact: VHF Channel 16 (156.8 mc/s).

36 and 24 hours ETA requested, cable "Penbay - Belfast/Maine", via Chatham Radio.

ANCHORAGES: No restrictions on anchoring.

RESTRICTIONS: No restrictions at night. Deep draft vessels brought in only on high water. Draft in concurrence with docks, 32 ft. low water. 10 ft. rise in tide - approach to Searsport 35 ft. - Bay 60 ft. limit.

MAX. SIZE: Size of vessel restricted to 38 ft. draft in harbour area. No outside installations at the port yet.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Boston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: Tugs in Searsport Harbour use Channel 16 and 2182. Vessels arriving Searsport go through radio station at Chatham, Mass., RCA installation, SSB station or a VHF public correspondence station.

TUGS: Penobscot Bay Towing Co., Marshall Wharf, Belfast, Maine 04915. Tel. (207) 338-3000. 24-hour service. Requested that orders for tugboat service be given during normal business hours, 24 hours in advance.

Tugs: "Ellen F.", diesel 1,200 h.p.
"Eileen McAllister", diesel 1,200 h.p.
"Roderick McAllister", diesel 1,200 h.p.
"Cape Fear", diesel 1,800 h.p.
"Michael H. Holmes", diesel 1,000 h.p.

Radio: ship to ship, VHF Channels 16-13-14.

Sea Pilots dock ship with tug's assistance.

BERTHING: Draft conditions govern arrival and departures.

Bangor and Aroostock Pier: Length 800 ft., width 100 ft. Depth alongside (East side) 34 ft., (West side) 32 ft.

C.H. Sprague Dock: Length 614 ft., depth alongside East side 34 ft. There are 3 towers for discharge of bulk cargoes.

Turning basin off docks, depth 34.5 ft. and 1,200 ft. width.

STEVEDORES:

Week days:

Order gangs by 1700 hrs. for following day 0800 start.
Order gangs by 0900 for same day 1300 start.
Order gangs by 1300 for same day 1800 start.

Weekends:

Order gangs by Saturday 1200 for a Sunday 0800 start.
Order gangs by Saturday 1200 for a Monday 0800 start.

MEDICAL: No advance notice required by Agent. 1 hospital, Waldo County, which takes bed patients. All seamen require Certificate showing they have had smallpox vaccination during last 3 years.

TANKERS: 2 berths at Searsport – 1 for No. 6 oil and 1 for light oil and gas. 2×8-in. hoses. 34 ft. low water.
DENSITY: Average density 1024.
FRESH WATER: Available by tug for boilers only at rate of tug hire. Drinking water available at piers.
FUEL: No. 6 oil at C. H. Sprague dock. Light oils delivered by tank truck at dock.
FIRE PRECAUTIONS: At certain oil piers information given to Shipmaster upon arrival at pier. Ample fire protection, salt-water lines, sprinkler system on pier, local fire department.
DEVELOPMENTS: 2 new 40,000 bbls. tanks for liquid fertiliser.
GANGWAY/DECK WATCHMEN: Not required.
OPENING/CLOSING HATCHES: Ship's crew may open hatch after longshoremen boarded ship.
CERTIFICATES:

Load-line Certificate.
Certificate of Foreign Clearance.
Ship's Safety Certificate.
U.S. tonnage Tax Certificate of previous trip if have them.
Radio Operator Licence.

CUSTOMS ALLOWANCE: Tobacco, 200 cigarettes per man. Wine and/or Spirit allowance 1 bottle per person.
CARGO GEAR: No additional cargo gear necessary.
IDENTIFICATION CARDS: Form I-95 must be filled out on arriving unless seamen has had a prior one made out for a previous arrival on same ship (on plastic card).
CONSULS:

Norwegian: Allan Kjos-Hansen, 30 Mayer Road, Portland, Maine, Vice-Consul.
French: Dr. Paul O. Proudian, 776 Main Street, Westbrook, Maine.
Finnish; Frank W. Bjorklund, 163 Main Street, Norway, Maine.
Italian: Dr. Domenica A. Santoro, 43 Deering Street, Portland, Maine.
Panamanian: Mary Navarro de Carrillo, Lafayette Town House, Portland, Maine.
Swedish: Martin Johnson, Vice Consul, 443 Congress St., Portland, Maine.

REPAIRS: All types of machinery repairs.
DRY DOCKS: None.
REPATRIATION: Arrangements must be made with Agent in advance by telegram.
AIRPORT: Bangor International Airport, 30 miles, Northeast Airlines.
HOLIDAYS: New Year's Day; Washington's Birthday; Patriot's Day; Memorial Day; Independence Day; Labour Day; Thanksgiving Day; Christmas Day and Veteran's Day. Possible to get gangs to work all days except on Labor Day and Christmas.
POLICE/AMBULANCE/FIRE: Police 548-2256; Ambulance 548-2900; Fire 548-2900.
TELEPHONE: Arrangements can be made to have phone put on ship, but most docks have pay phones.
AUTHORITY: Maine Port Authority, Portland.

SEATTLE, Washington: 47.36 N. 122.20 W

(See Plan Book)

PORT LIMITS: Port of Seattle limits are co-extensive with the boundaries of King County in which Seattle is situated. A vessel has "arrived" when it has tied-up to a berth.
DOCUMENTS (on arrival from foreign):

Clearance from Last Foreign Port.
2 Crew Lists on Form. I.418.
2 Passenger Lists on Form I.418 (if applicable).
Passenger Declarations if applicable.
2 Store Lists.
2 Crew Purchase (curio) Lists.
2 Manifests of Cargo for discharge on CF.7527-A or 7527-B.

If first arrival port on an inward voyage, must also have 2 sets of Manifests of complete cargo on CF.7527-A or 7527-B, one for Customs at this port and the other for use as a "Travelling Manifest" to go forward to other discharge ports.

A – For U.S. Public Health Quarantine Boarding Officer: "Quarantine Declaration" on Form PHS.43.
B – For U.S. Dept. of Agriculture Boarding Officer: "Shipmaster's Declaration and Warning Notice" on Form AIQ.43.
C – For U.S. Immigration Boarding Officer:
1. Crew List on Form I.418 visaed by U.S. Consul abroad.
2. Passenger List on Form I.418.
3. Attachment to Passenger List on Form I.92.
4. Form I.94 for each passenger.
5. Form I.95 or ID Card (Form 184) for each crewman. (These are reusable for multiple entries, but for seamen on first trip to United States a new Form. I.95 must be ready for presentation on arrival.)
D – For U.S. Customs Boarding Officer and Agent or Broker:
1. 3 copies Crew List (Form I.418).
2. 3 copies Cargo Manifest on Form 7527A or B.*
3. 3 copies Store List – no official form provided.*
4. 3 copies Crew Purchases or Curio List (no official form provided).*
5. 3 Passenger Lists on Form I.418.
6. For U.S. Ships – Declaration re foreign repairs on Form 3415.
7. For U.S. Ships – Certified Crew List from last U.S. port before going foreign.

*At subsequent U.S. ports of call 2 copies required of extracts Cargo Manifests of cargo for the port concerned, and 2 copies of lists of stores and curios remaining on board.
PILOTAGE: Compulsory for all vessels except those on coasting trade. Pilots may be obtained from Puget Sound Pilots' Association, Seattle, at short notice. Inward, Pilot boards vessel at pilot station off Port Angeles.
ANCHORAGE: Extensive anchorage in Eliott Bay, depths of 90 ft.
RESTRICTIONS: Only for Inner Harbour, entrance through Canal Locks, max. 800 ft. × 80 ft. × 29 ft. fresh water.
MAX. SIZE: Controlled by depth at berth.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Available, 2nd tug normally used.
BERTHING: Over 62 berths for ocean-going vessels. Depths alongside, 30 to 73 ft. MLLW.
SPECIALISED HANDLING FACILITIES: Terminal 20 has among its equipment a 200-ton capacity shear-leg crane. Also has pipe-lines to carry molasses, tallow or other non-petroleum liquid cargo, and has a tank farm for storage.

Terminal 115 – 2 berths, capacity, import steel and autos.

Terminal 115 – Foss Alaska Barges, has specialised finger piers, to handle container-to-barge operations.

Terminal 128 – A barge terminal.

Terminals 5, 18, 25, 37 and 46 – Container Terminals, equipped with large container cranes and yards to handle van shipments. Depth alongside, Terminals 18 and 25 – 50 ft. Terminals 5, 37 and 46 – 40 ft.

Pier 86 – fully automated, deep water, Grain Terminal. With 1 berth it can accommodate a vessel with up to 73 ft. draft and length up to 1,400 ft. Storage capacity 4.2 million bushels. Loading rate 3,000 tph.

CRANES: *Terminal 5:* 4×33-ton container cranes.
Terminal 18: 3×45-ton and 2×33-ton container cranes.
Terminal 20: 3×50-ton revolving cranes and 1×200-ton sheer leg.
Terminal 25: 3×45-ton container cranes.
Pier 28: 1×50-ton gantry crane and 1×40-ton gantry crane.
Terminal 37: 4×45-ton container cranes.
Terminal 46: 1×45-ton container cranes.
Terminal 115: 1×50-ton and 1×35-ton gantry crane.
Terminal 91: 1×35-ton gantry crane.
STEVEDORES: 58 local gangs available. Gang requirements must be made known to the contracting stevedore prior to 1100 hrs. on day before vessel plans to dock. Order before 1030 hrs. on Saturday for Saturday afternoon, Sunday, and Monday.
DENSITY: Salt water in Outer Port. Fresh water inside Canal Locks.
FRESH WATER: Available at all wharves.
FUEL: Available.
GANGWAY/DECK WATCHMEN: Watchmen required if detainees aboard.
OPENING/CLOSING HATCHES: Normally carried out by stevedores while in port.
CERTIFICATES:

Certificate of Registry.
Certificates for any previous U.S. tonnage tax payments within the past year.
International Load Line Cert.
Safety Radio Cert.
Deratisation Cert.
Cargo Gear Inspection Cert.
Cert. of Inspection (for U.S. vessels).

CUSTOMS ALLOWANCE: No definite quantities prescribed; reasonable allowance at discretion of Customs Inspector.
IDENTIFICATON CARDS: Required.
CONSULS:

Austria
Belgium
Canada
Chile
China
Denmark
Ecuador
El Salvador
Finland
France
Germany
Guatemala
Honduras
Iceland
Italy
Japan
Mexico
Netherlands
Nicaragua
Norway
Peru
Philippines
Sweden
Switzerland
United Kingdom

REPAIRS: All types of repair possible.
DRY DOCKS: 10 dry docks for vessels up to 20,000 tons.
REPATRIATION: All facilities exist.
AIRPORT: Seattle International Airport.
TIME: Pacific Standard Time, GMT minus 8 hours; Pacific Daylight-saving Time, from end April to end October, is GMT minus 7 hours.
HOLIDAYS: January 1st, New Year's Day (no work); February 12th, Lincoln's Birthday (work); Third Monday in February, Washington's Birthday (work); Last Monday in May, Memorial Day (work); July 4th, Independence Day (work); First Monday in September, Labour Day (work); Second Monday in October, Columbus Day (work); Fourth Monday in October, Veteran's Day (work); First Tuesday in November, Statewide Election Day (work); Fourth Thursday in November, Thanksgiving Day (no work); December 25th, Christmas Day (no work); In addition July 5th, known as "Bloody Thursday", while not a holiday, is a no work day for longshoremen.
SHORE LEAVE: Allowed, except for crewmen detained by Immigration.
AUTHORITY: Port of Seattle.

AGENT: Cascade Shipping Co., Colman Building, 811 1st Avenue, Seattle, Washington 98104. Phone: 206-622-2803. Telex: TWX 910-444-2079. Cables: "Caship".

SEWARD, Alaska: 60.06 N. 149.27 W.

(See Plan Book)

DOCUMENTS:

3 copies Cargo Manifest (Forms 7527-A or 7527-B) the original showing all cargo on board, and 2 copies showing only cargo for this port.
2 copies Crew Manifest (curio list).
2 copies Stores List.
2 copies Passenger List (Form I.-418).
2 copies Crew List (Form I.-418).

Customs boarding Officer will also examine Ship's Register and Load-line Certificate. In addition, the following documents will be required for formal entry to be made within 48 hours of arrival from abroad, or 24 hours from arrival from a United States port:

Health Pratique.
Master's Oath (Customs Form 3255).
All Foreign clearances.
U.S. Certificates of payment to tonnage tax (Customs Form 1002).
Certified Crew List.

PILOTAGE: Alaska Marine Pilot's Association, Box 273, Homer, Alaska 99603. 48 hours advance notice. 2182 calling frequency KC–KTE–21. Anchorages as noted on chart. C. & G. S. 8529 Resurrection Bay.

Pilot boards at Cains Heads in Resurrection Bay.

MAX. SIZE: Harbour depth 35 ft. MLLW.

ANCHORAGE: Suitable anchorage in 30 fathoms depth available for deep draft vessels at the head of the Bay, South of marked buoy.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: KWA 346 (AM) Alaska Railroad Dock, frequency monitored 2182 kc/s. KWA 364 (SSB) Alaska Railroad Dock frequency monitored 4-6-8-12 Megs.

TUGS: No regular tug service available. Prior arrangements need be made with tugs from Cook Inlet. Foss Tug & Barge or Puget Sound Tug & Barge Company.

BERTHING: 24 hour berthing. Berthing permit required. Advance notice of 48 hours requested.

200 ft. by 735 ft. steel and concrete finger pier.
East Side — 600 ft. long with 35 ft. depth of water. (10 ft. out from dock face).
West Side — 600 ft. long with 35 ft. depth of water.
South End — 200 ft. long with 35 ft. depth of water.
(East and West Berths serviced by railroad spurs).

CRANES: East Berth – 2 gantry cranes. Maximum capacity – 45 short tons, maximum radius – 105 ft. Forklifts ranging up to 35 ton capacity.

STEVEDORES: Northern Stevedoring and Handling Corporation supply labour force.

MEDICAL: Fully staffed 30 bed hospital. All medical facilities available.

DENSITY: 1.0248 water density at Mean High Water.

FRESH WATER: Available at East and West berths. 4 in. water line; 67 lb. pressure.

FUEL: Diesel fuel available from pipeline at South and West Berth only. Other grades delivered by tank wagon.

OPENING/CLOSING HATCHES: Handled by crew, if done before berthing ship. By stevedores if tied to dock.

IDENTIFICATION CARDS: U.S.C.G. Port Security Card or Seaman's Card required.

REPAIRS: Radio, radar, welding, machining and light engine repairs can be effected.

AIRPORT: 1 mile. Charter Service. No regular air service.

TIME: Alaska Standard Time.

HOLIDAYS: All holidays are time and one half. Cargo can be worked on all except Christmas, New Year's and Labour Day.

POLICE/FIRE/AMBULANCE: Police, tel. CA 4-5201; Ambulance, tel. CA 4-3042; Fire, tel. CA 4-3444.

AUTHORITY: The Alaska Railroad.

SITKA, Alaska: 57.03 N. 135.20 W. (See Plan Book)

Located on the Western side of Sitka Sound, Baranof Island. Open all year.

APPROACHES: 3 natural channels: Western, Middle and Eastern.

DOCUMENTS: See "Anchorage, Alaska".

PILOTAGE: Pilot pick-up point – close aboard vicinity Eckholm Light.

ANCHORAGE: Jamestown Bay.

MAX. SIZE: Harbour depth 22 ft. MLLW. Tides: diurnal range – 9.9 ft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

CUSTOMS: Quarantine, Immigration and Customs, local.

TUGS: 7 tugs 300 h.p. to 1,200 h.p.

BERTHING: 3 wharves.

1. Conway Dock: Berthing length 160 ft., depth 30 ft. MLLW. No cranes, 3 lift-trucks; 10,000 sq. ft. covered shed space; fresh water.

2. Japonski Dock: Government dock only for limited commercial use.

3. Alaska Lumber & Pulp Co.: (Private) Berthing length 700 ft., depth 35 ft. LW. Walking cranes only. Not less than 12 lift-trucks, 30,000 sq. ft. covered shed space; fresh water. (Located at Silver Bay, Sawmill Cove, 4 miles South of Sitka). 30,000 sq. ft. open storage.

STEVEDORES: 3 gangs.

REPAIRS: Light repairs only.

FRESH WATER: Available.

FUEL: Not available.

MEDICAL: Sitka Community Hospital and U.S. Public Health Service Hospital on Japonski Island.

TRANSPORTATION: Air and ferry.

SKAGWAY, Alaska: 59.27 N. 135.18 W.

Located at the Northern end of Lynn Canal, 14 miles North of Haines.

APPROACHES: Via Lynn Canal.

DOCUMENTS: See "Anchorage, Alaska".

PILOTAGE: Pick-up point located in vicinity of Point Retreat.

MAX. SIZE: Harbour depth 30 ft. running out to 300 ft. Tides diurnal range 16.7 ft. Also see "Berthing".

ANCHORAGE: In Lutak Inlet, 14 miles South of Skagway.

HEALTH: See "Health: All ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

CUSTOMS: Quarantine, and Customs, local. Immigration from Haines.

BERTHING: 1. White Pass and Yukon Railroad Dock: Containerized cargo to Vancouver and Whitehorse is the principal use, also used for tankers and cruise ships. 900 ft. long, 100 ft. wide; depth at face varies from 20 to 43 ft. Southern end in poor condition. No covered storage. Open storage 80,000 sq.ft. 1 fork-lift is available. Containers presently loaded and unloaded with ship's gear. 2 straddle cranes for containers on dock.

2. Skagway Terminal Co.: Ore loading facility. 1,000 ft. berth, fender dolphins, and walkway. 42.5 ft. deep at face. Sole use for bulk cargo ships. Adjacent to the berth is a warehouse of 108,000 sq.ft. Also available are 50 acres for open storage. Loading equipment consists of 1 fixed loading spout with a capacity of 1,500 t.p.h.

TUGS: 3 available from Haines.

STEVEDORES: 3 gangs.

REPAIRS: None.

WATER: Available in small quantities in temperate seasons only.

FUEL: None.

MEDICAL: Medical clinic and one nurse.

TRANSPORTATION: Rail, ferry and air.

SMITHS BLUFF, Texas: 30.00 N. 93.59 W.

DOCUMENTS, PILOTAGE, RADIO, etc.: Refer to "Port Arthur".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: Meet vessel in Neches River before arriving at berth. Normally 2 tugs required berthing/unberthing.

BERTHING: Pure Oil Co.: distance from sea 38 miles, depth at berth 37 ft. Sun Oil Co.: distance from sea 38 miles, depth at berth 36 ft.

MEDICAL: All facilities available.

DENSITY: Fresh water.

FRESH WATER: Available ex wharf at Pure Oil Terminal, otherwise by barge.

FUEL: Available ex wharf at Pure Oil Terminal. All grades available by barge from Port Arthur or Beaumont.

GANGWAY/DECK WATCHMEN: Not required unless crewmen detained by Immigration.

CUSTOMS ALLOWANCE: 300 cigarettes and 1 quart wine or spirits for each man.

IDENTIFICATION CARDS: Foreign crew only require Immigration Landing Permit.

CONSULS: Nearest at Houston.

REPAIRS: DRY DOCKS: See "Port Arthur".

AUTHORITY: Port Director, Port of Beaumont.

STOCKTON, California: 37.57 N. 121.19 W.

(See Plan Book)

DOCUMENTS: See "San Francisco".

PILOTAGE: Pilots commissioned by Stockton Port District. Pilots obtained by contacting Secretary of California Inland Pilots' Association, located at Marine Exchange, World Trade Center, San Francisco, California (KBP 386).

ANCHORAGE: Emergency anchorage only permitted in Turning Basin, 32 ft. depth.

RESTRICTIONS: Restrictions only in effect if water at flood stage. See "San Francisco".

MAX. SIZE: Draft restrictions of 30 ft. at low tide, 32 ft. at high tide.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to San Francisco Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Ship to shore Radio (KBP 376) enables constant contact with Pilots who therefore aware of any problem that may develop up or down river. Arrangements also may be made for readiness of ordered gangs within 15 minutes of ship's arrival.
TUGS: Tugs join vessel 0.5 mile up river from Main Channel; generally, ship's lines used, however, tug lines may also be utillised.
BERTHING: *Port Stockton Bulk Material Wharf, Berths 12-13:*

Owned by: Stockton Port District.

Operated by: Stockton Port District.

Use; Shipment of dry-bulk commodities, including clay clinkers and petroleum coke; receipt of molasses and petroleum products.

Dimensions: Length of face 566 ft.; lower side 13.5 ft., upper side 13.5 ft.; depth alongside at MLLW 35 ft.; usable berthing space 566 ft.

Mechanical handling facilities: Max. vessel coke loading rate 240 long t.p.h. 2 small bulldozers available for trimming cargo in holds of vessels, in addition to 360° spout trimmer.

Remarks: Car dumper has an operating rate of 275 tons coke/hour.

Port Stockton Ore Wharf, Berths 10-11:

Owned by: Stockton Port District.

Operated by: Stockton Port District.

Use: Container-handling dock; receipt of molasses and petroleum products.

Dimensions: Length if face 810.5 ft., lower side 102 ft.; depth alongside at MLLW 32 ft.; usable berthing space 810.5 ft.

Remarks: Face of wharf is in line and contiguous with face of Berth 9 providing a total of 1,455.5 ft, of berthing.

Port Stockton General cargo Wharf, Berth 9:

Owned by: Stockton Port District.

Operated by: Stockton Port District.

Use: Receipt and shipment of general cargo.

Dimensions: Length of face 645 ft., upper side 75 ft.; depth alongside at MLLW: Face 37-34 ft., upper side 35 ft.; usable berthing space; Face 645 ft. upper side 110 ft. with dolphin; width of apron: Face 41.25 ft.

Mechanical handling facilities: Forklift trucks and other types of cargo-handling equipment, owned by the Port District and by stevedoring companies, are available as needed.

Port Stockton Wharf No. 8:

Owned by: Stockton Port District.

Operated by : Stockton Port District.

Use: Receipt and shipment of general cargo; Liquid sugar facility and receipt of molasses.

Dimensions: Length of 396 ft.×88 ft.; depth alongside at MLLW 37-36 ft.; usable berthing space 484 ft. with trestle.

Port Stockton Wharf No. 7:

Owned by: Stockton Port District.

Operated by: Stockton Port District.

Use: Receipt and shipment of general cargo.

Dimensions: Length 516 ft. depth alongside at MLLW 37-36 ft.: usable berthing space 516 ft.; width of apron 31 ft.

Port Stockton Wharf No. 6:

Owned by: Stockton Port District.

Operated by: Stockton Port District.

Use: Receipt and shipment of general cargo.

Dimensions: Length 418 ft.; depth alongside at MLLW 37-36 ft.; usable berthing space 418 ft.; width of apron 31 ft.

Port Stockton Wharf No. 5:

Owned by: Stockton Port District.

Operated by: Stockton Port District.

Use: Receipt and shipment of general cargo.

Dimensions: Length of face 428 ft.; depth alongside at MLLW 34-32 ft.; usable berthing space 429 ft.; width of apron 31 ft.

Port Stockton Grain Wharf No. 4:

Owned by: Stockton Port District.

Operated by: Stockton Port District.

Use: Receipt and shipment of general cargo, receipt of bulk phosphate rock by self-discharging vessel; and shipment of bulk fertilisers.

Dimensions: Length of face 461 ft.; depth alongside at MLLW 32-35 ft.; usable space 462 ft.; width of apron 31 ft.

Port Stockton Wharf No. 3:

Owned by: Stockton Port District.

Operated by: Stockton Port District.

Use: Receipt and shipment of general cargo.

Dimensions: Length of face 461 ft.; depth alongside at MLLW 32-36 ft.; usable berthing space 461 ft.; width of apron 31 ft.

Port Stockton Open Wharf No. 2:

Owned by: Stockton Port District.

Operated by: Stockton Port District.

Use: Receipt and shipment of general cargo; shipment of logs, and handling of heavy-lift cargo.

Dimensions: Length of face 506 ft.; depth alongside at MLLW 32-36 ft.; usable berthing space 506 ft.; width of apron: open.

Remarks: Wharf has 39,000 sq. ft. of open storage area with an additional 2.3 acres of open storage area in rear. At the Industrial Park approx. 104 acres of open storage area are located South of W. Washington Street; over 50 acres of this area can be used for storing logs awaiting shipment. An additional 56 acres of open storage are located North of W. Washington Street.

Logs may be transferred to wharf by trucks and by tractors equipped with log clamps.

Stockton Elevators Grain Elevator Main Wharf No. 1:

Owned by: Stockton Elevators Inc.

Operated by: Stockton Elevators Inc.

Use: Shipment of grain by vessels and by ocean going and inland waterway barges; receipt of grain by self-unloading barges.

Dimensions: Length of face 564 ft., West side 20 ft., East side 20 ft.; depth alongside at MLLW 35-37 ft.; usable berthing space 564 ft.; width of apron, open end 20 ft.

Mechanical handling facilties: 2 towers on wharf, each with 13-in. diameter, telescopic, mechanically operated, grain-loading spout; loading rate, 900 short t.p.h. (29,877 bu.) at East tower; 800 (26,557 bu.) at West tower; combined rate, 900 short tons.

Remarks: Grain gallery connecting towers on wharf has a 30-in., electric-belt conveyor; and gallery extending from East tower to grain elevator has two 30-in. belt conveyors.

BRIDGES: Fixed-span high-level toll bridge across Carquinez Strait, with min. clearance of 135 ft. above MHHW. Southern Pacific Railroad lift span bridge crosses Suisun Bay 6.5 miles upstream from Carquinez bridge, with min. clearance above MHHW of 70 ft. when closed and 135 ft. when open. Horizontal clearance on lift span 290 ft. A third bridge, 22 miles above Southern Pacific bridge, near Antioch, has min. clearance 70 ft. when closed and 135 ft. when open. Horizontal clearance of span 265 ft.
STEVEDORES: *General Cargo* – For gang start at 0800 hrs., orders must be placed at 1600 hrs. of previous day; night gangs must be ordered by 1100 hrs. These times pertain to week-day gangs. For week-end gangs, 1100 hrs. Saturday for Saturday night, Saturday morning, Sunday night and Monday morning. Day shifts run from 0800 to 1700 hrs. Night shifts 1700 to 0300 hrs. Arrangements can be made for a special third shift from 0300 to 0800 hrs. Rates quoted on request.

Bulk Ore and Grain Cargoes—Orders for gangs must be placed at same time as for general cargo. This operation on 24 hour basis; day shift, 0800 to 1600 hrs., night shift 1600 hrs. to midnight, swing shift, midnight to 0800 hrs. Also see "Radio".
MEDICAL: Arrangements with San Joaquin Medical Society for physicians, surgeons and dentists. 5 hospitals within radius of 6 miles from port. Ambulance service readily available. Telephone number for this service is 466-9535 (day or night).
TANKERS: 2 berths, 32 ft. depth available.
FRESH WATER: Available through pipelines.
FUEL: All grades of fuel available with 1 day's advance notice.
DEVELOPMENTS: Deepening of channel to 35 ft. proposed.
GANGWAY/DECK WATCHMEN: Services of watchmen not necessary. Available if requested.
OPENING/CLOSING HATCHES: Hatches may be opened prior arrival and closed after ship sailed from port; any opening or closing of hatches at dockside must be performed by stevedores.
CERTIFICATES: See "San Francisco".
CUSTOMS ALLOWANCE: Tobacco, Wine and/or Spirit, see "San Francisco".
CARGO GEAR: Safety regulations require strict adherence to max. loading or unloading weight capacity of ship's gear.
IDENTIFICATION CARDS: Not required.
CONSULS: See "San Francisco".
REPAIRS: Minor types of repairs carried out.
DRY DOCKS: Nearest dry docks, San Francisco.
REPATRIATION: No facilties in Stockton for effecting crew changes and arranging any necessary repatriations. Special arrangements may be made through Customs.
AIRPORT: Stockton Metropolitan Airport located approx. 6 miles from port. Serviced by United Air Lines and Air West.
TIME: Pacific Standard Time in effect from last Sunday in October to last Sunday in April; Pacific Daylight Time goes into effect on last Sunday of April until last Sunday in October, when clocks are advanced 1 hour.
HOLIDAYS: New Year's Day; Lincoln's Birthday; Washington's Birthday; Memorial Day; Independence Day; Labour Day; Admission Day; Columbus Day; Veteran's Day; Thanksgiving Day; Christmas Day are all holidays. In addition to above. General Election Day, both State and National, as well as any day proclaimed by Governor of California or President of United States shall be observed as holiday. Work can be arranged for all holidays.
POLICE/AMBULANCE/FIRE: Security Force on duty 24 hours a day and can be reached by dialling extension 246 for any emergency that might arise. Stockton Police Department's emergency telephone number (209) 466-6843. Stockton Fire Department (209) 464-4646. Ambulances may be secured by telephoning (209) 466-6869; 464-4846; 463-3202; 466-1601; 464-4611; 464-1546.
TELEPHONES: Telephones placed aboard on request.
ELECTRIC CURRENT: At wharves where current available for ship's use, it is 110 volt, single phase, 60 cycle for lighting and 440 volt, 3 phase, 60 cycle for power.
SHORE LEAVE: Permitted.
REGULATIONS: Port of Stockton requests notice of ship's intent to come into port at least 7 days prior to arrival; vessels, who have made prior arrangements, will have precedence over vessels who sail into port without previous notice.
AUTHORITY: Port of Stockton.
AGENT: See "San Francisco".

TACOMA, Washington: 47.14 N. 122.28 W. (See Plan Book)

DOCUMENTS (on arrival from foreign):
Ship's document.
Clearance from Last Foreign Port.
2 Crew Lists on Form I.418
2 Passenger lists on Form I.418 (if applicable)
Passenger declarations if applicable.
2 Store Lists.
2 Crew Purchase (curio) Lists.
2 Manifests of cargo for discharge on C.F. 7527—A or 7527-B.

If first arrival port on an inward voyage, must also have 2 sets of Manifests of complete cargo on C.F. 7527-A or 7527-B, one for customs at this port and other for use as a "Travelling Manifest" to go forward to other discharge ports.

A – For U.S. Public Health Quarantine Boarding Officer: "Quarantine Declaration" on Form PHS.43.

B – For U.S. Department of Agriculture Boarding Officer: "Shipmaster's Declaration and Warning Notice" on Form A1Q.43.

C – For U.S. Immigration Boarding Officer:
1. Crew List of Form I.418 visaed by U.S. Consul abroad.
2. Passenger List on Form I.418.
3. Attachment to Passenger List on Form I.92.
4. Form I.94 for each passenger.
5. Form I.95 of ID Card (Form 184) for each crewmen. (These are reusable for multiple entries, but for seamen on first trip to United States a new Form. I.95 must be ready for presentation on arrival.)

D – For U.S. Customs Boarding Officer and Agent or Broker:
1. 3 copies Crew List (Form I.418).
2. 3 copies Cargo Manifest on Form 7527A or B.*
3. 3 copies Store List – no official form provided.*
4. 3 copies Crew Purchases or Curio List (no official form provided).*
5. 3 Passenger Lists on Form I.418.
6. For U.S. Ships – Declaration re foreign repairs on form 3415.
7. For U.S. Ships – Certified Crew List for last U.S. port before going foreign.

* At subsequent U.S. ports of call 2 copies required of extracts Cargo Manifests of cargo for the port concerned, and 2 copies of lists of stores and curios remaining on board.

PILOTAGE: Is compulsory for all vessels except those under coasting trade on West coast of the United States, including Alaska and British Columbia. Pilots board off Port Angeles Pilot Station.

ANCHORAGE: The depths as a rule are too great for convenient anchorage, but vessels occasionally anchor under the Northern shore about 1 mile Eastward of Brown's Point. Vessels may anchor in about 18.29 m., 450 yd. N.N.W. of the outer end of Puyallup Waterway West Jetty.

City regulations permit anchorage in any part of the bay outside harbour lines so as not to interfere with vessels arriving or departing from their docks.

MAX. SIZE Length over 305 m. (centre to centre dimensions of mooring dolphins), draft subject to berth depth.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: Available, join vessel in Commencement Bay, approx. half way between Brown's Point and the designated Dock. Tug's lines are used and there is a charge for tug's lines.

BERTHING: 29 deep water berths.

General Cargo: 161,000 sq.m. warehouse space, 91 hectares of open storage paved, lighted, fenced, serving all piers.

Water depths: 9.15 m. to 21.34 m. below MLLW.

BULK HANDLING FACILITIES: 550 m. pier with 12 to 15 m. water depth. 5 heavy lift whirley cranes and bulk unloading crane with 750 to 1,500 t.p.h. capacity; 150,000 tons capacity alumina storage structure with load-out facility; 12.14 hectare stockpile area including holding area for 300 rail cars.

2 Bulk grain elevators: United Grain: Pier 1, 4.5 million bushel capacity; loading rate: 1,000 t.p.h.; 271.34 m. dock; 15.24 m. water depth.

Continental Grain: 3 million bushel capacity: loading rate: 2,400 t.p.h.; 137 m. dock with dolphins to 244 m.; 21.34 m. water depth.

Bulk Liquid Facility: 3.5 million gallon capacity; heated tanks and piping for both rail and truck shipping and receiving; serves vessels at Pier 1, 676 m., 10.67 m. water depth, and Pier 5, 174 m., 10.06 m. water depth.

CONTAINER HANDLING FACILITIES: *Terminal 4:* Container handling and general cargo. Container handling capability – 5,000 units per month. 2 berths, total length 378.6 m., width 42.7 m., Depth 13.7 m. MLLW. 1 warehouse 13,935 sq.m., 2×40-ton IHI container cranes, 10.12 hectares paved, lighted, fenced, back-up storage. 80 Reefer container outlets (240-480 volts). Direct rail access to pier.

Terminal 7: Containers and General cargo. 4 berths, total length 823 m., width 41 m., depth 13.7 m. MLLW. 2 warehouses each 9,290 sq.m. 2×45-ton Whirley cranes, 1×40-ton IHI multipurpose crane, 1×50-ton Peiner multipurpose crane (Containers, dry bulk). 17 hectares paved, lighted' fenced, back-up storage. 54 Reefer container hook-ups (240–480 volts). Direct rail access to pier.

BRIDGES: The 11th Street Bridge: All ships are required to notify for opening 2 hours in advance. The Puyallup River Bridge on 11th Street has been deactivated. The Blair and Hylebos Bridges have no restrictions. Closed periods apply to the 11th Street Bridge and the hours are as follows: 0645 – 0745 hrs., 1530 – 1730 hrs.

STEVEDORES: Seattle Stevedoring Company, Jones-Washington Stevedore Company, Crescent Wharf and Warehouse Co., American President Lines Terminals Northwest.

Gang requirements must be made known to contracting stevedore prior to 1100 hrs. on day before the vessel plans to dock. (1030 hrs. on Saturdays for gangs on Saturday p.m., Sunday and Monday.)

Stowage of cargo for discharge or load determines the gang size requirements. Sufficient information for intelligent gang orders is a necessity – i.e. advance cargo plans, unusual size and/or weight, etc.

TANKERS: Loading/discharge lines 8 in. and 10 in. 150 ASA flanged connections. Slop discharge facilities not available. Fresh water available. Coast Guard regulations strictly enforced.

DENSITY: The average density in the port is 16.8 at 15° C.

FRESH WATER: Available. Delivers to vessel through portable meter hose.

FUEL: Available.

Grade	*Viscosity at 122°SSF*
Bunker "C"	165–175
PS–400	112–116
Bunker Special	50-60
PS–300	32–35

Advance notice required

FIRE PRECAUTIONS: Very strict precautions in force.

GANGWAY/DECK WATCHMEN: Watchmen required if detainees are aboard.

OPENING/CLOSING HATCHES: Normally carried out by stevedores. In practice, however, the crew can perform this task while in transit.

CERTIFICATES:
Certificate of Registry.
Certificates for any previous U.S. tonnage tax payments within the past year.
International Load-line Certificate.
Safety Radio Certificate.
Deratisation Certificate.
Cargo Gear Inspection Certificate.
Certificate of Inspection (U.S. vessels).

CUSTOMS ALLOWANCE: Tobacco: Wine/Spirit: No definite quantities prescribed; reasonable allowance at discretion of Customs Inspector.

IDENTIFICATION CARDS: Required.

REPAIRS: The largest repair yard in Tacoma can haul out vessels up to 1,000 tons for all kinds of repairs, including electronics, welding, painting and machining; shafts up to 30 ft. in length are machined here. Another plant does shipbuilding exclusively, but will perform topside repairs if needed. Wreckage and salvage facilities are available. Larger vessels go to Seattle for dry-docking. Minor repairs and services for small craft are available at marinas on the City Waterway and the N.E. shore of Commencement Bay.

AIRPORT: Seattle – Tacoma International Airport is 16 miles North from Port and Tacoma Industrial Airport 8 miles West.

TIME: Local time reference is GMT minus 8 hours. In Summertime it is GMT minus 7, or Pacific Daylight Saving Time, started the last week-end in April and finished the last week-end in October.

HOLIDAYS: New Year's Day (January 1st) no work; Lincoln's Birthday (February 12th); Washington's Birthday (February 22nd); Memorial Day (May 30th); Independence Day (July 4th) no work; Bloody Thursday (July 5th); no work; Labour Day (September 1st) no work; Columbus Day (Friday after Thanksgiving); Veterans' Day (November 11th); Thanksgiving Day (November 27th) no work; Christmas Day (December 25th) no work.

POLICE/AMBULANCE/FIRE: Emergency tel. numbers:
Police 593-4911; Fire MA 7-0151; Ambulance 473-1611.

TELEPHONES: Pay telephones available at Piers 1, 2, 4, 7, Blair Terminal, Pierce County Terminal, Grain Docks 23 and 24. There is no charge for this service.

SHORE LEAVE: Allowed.

AUTHORITY: Manager, Terminal Division, Port of Tacoma.

AGENT: See "Seattle".

TAMPA, Florida: 27.57 N. 82.28 W. (See Plan Book)

DOCUMENTS:
Passports and Seamen's Books.
Vaccination Certificate for each Seaman.
Certified Crew List: must be on American form and certified by American Consular office at foreign country from which departed.
U.S. Customs requires Inward Foreign Manifest (original and 3 copies). This must describe cargo which is to be discharged this port and/or any other port in vessel's itinerary. It must show:
Vessel's name and flag.
Master's name.
Last foreign port of departure.
Net registered tons of vessel.
When and where vessel built.
Consigned to Agent.
Bill of Lading Number.
Marks and numbers (on cargo).
Complete description of merchandise.

Weight in kilos or pounds.
Port of loading.
Port of discharge.
Stores Lists (original and 3 copies).
Crew Curio List (original and 3 copies).
Narcotic List (original and 3 copies).
*Dangerous Cargo List (original and 3 copies).
*This should be filled out even if nothing dangerous aboard.

Health officials will board vessel first. Bills of Lading not needed for Customs purposes.

GENERAL CARGO FACILITIES:

Operator	*Location*	*Length*	*Depth*	*Remarks and Equipment*
Eller & Co. Inc. (Port Authority Berths Nos. 209, 210, 211)	Harbor Boulevard, Holland Terminal	1,800 ft. Marginal Wharf	34ft.	Fork Lifts: 1×10 tons, 4×8 tons, 5×2.5 tons, 11×4 tons. Mobile shore cranes available 70–300 tons
Garrison Terminals Inc.	13th and Beatrice St.	1,759 ft. Marginal Wharf	30 ft.	Crawler Cranes: 4 ranging from 37 to 72 tons. Fork Lifts: ranging from 1,000 to 20,000 lb. capacity. Bulk handling: 5 hoppers, clamshell buckets, shipside conveyor. Bagging: openmouth and valve baggers for bulk fertilizer materials.
Garrison West	Foot of Franklin St.	543 ft. Marginal Wharf	27 ft.	Crawler Cranes: 4 ranging from 37 to 72 tons. Fork Lifts: ranging from 1,000 to 20,000 lb. capacity. Bulk handling: 5 hoppers, clamshell buckets, portable shipside conveyor. Stationary under hopper bulk receiving system.
Spassard L. Holland Terminal (Port Authority Berths Nos. 209, 210, 211)	Harbor Boulevard	1,800 ft. Marginal	34 ft.	Back land leased to Uiterwyk Cold Storage and Eller & Company with preferential berthing rights. The 100 ft. apron on all berths is public.
Spessard L. Holland Terminal (Port Authority Berth No. 202)	Harbor Boulevard	600 ft. Marginal Wharf	34 ft.	
Kreher Terminal Berths No. 223, 224	Carbide Avenue, Hookers Point	1,120 ft. Marginal Wharf	34 ft. (for 800 ft.) 14/16 ft. (for 320 ft.)	Back land leased to South State Terminals, Union Carbide and Standard Gypsum. Wharf apron and docking area is public and subject to preferential berthing rights of one tenant.
S.E.L. Maduro (Florida), Inc.	13th and York St.	1,200 ft. Marginal Wharf	30 ft.	All sizes fork lifts including specialized newsprint handling and 52,000 lb. capacity for handling of containers; mobile shore cranes available.
Metroport Terminals Berths 263, 264, 265, 266.	601 N. 13th Street	2,255 ft. Marginal Wharf 6 berths	30/27/25 ft.	Banana unloading conveyor system, 20 ton gasoline crane with 45–100 ft. boom, 4 lift trucks.
Southport Stevedores Inc. (Port Authority Berths Nos. 251, 252)	Foot of Grant St.	1,200 ft. Marginal Wharf	34 ft.	Cranes: 4×40 tons gantries Fork Lifts: up to 20,000 lb.
Tampa Import and Export Terminal	521 Ashley St.	960 ft. Marginal Wharf	29 ft. 06 in.	Cranes: 2×35 ton Spanner, 1×25 ton Lift Trucks: 4,000 tp 10,000 lb. capacity. Dry bulk cargo conveyor system
Uiterwyk Cold Storage Corp. (Port Authority Berths Nos. 209, 210, 211)	Harbor Boulevard	800 ft. Marginal Wharf	34 ft.	Fork Lifts

SPECIALISED GENERAL CARGO FACILITIES:

Operator	*Location*	*Length*	*Depth*	*Remarks and Equipment*
Commercial Metals Transport Co.	West end of Port Sutton, east side of turning basin	530 ft. Marginal Wharf	30 ft.	Scrap metal loading facility. 4 diesel cranes 3×80 ft. boom, 1×70 ft. boom each equipped with electric magnets
Tampa Bay Terminal Inc.	Foot of Grant St.	700 ft. Marginal Wharf	34 ft.	Scrap metal loading facility. 2 diesel electric travelling, revolving, full-portal shipside cranes with 130 ft. boom and capacity of 40 tons. Equipped with electric magnets.
Cattle Loading Facility (Berth No. 232)	Lehman St. Hookers Point	245 ft. Timber Pier	22 ft.	Loading chutes, squeeze chutes, watering troughs. Partially covered timber frame holding pens with metal roof and concrete floor which will accommodate up to 800 head of cattle depending on their size. Centre of ship airspace clearance 68 ft. above MLW.
Westinghouse Electric Corp.	6001 S Westshore Boulevard	300 ft.×50 ft. barge slip	12 ft.	400–600 ton capacity bridge crane with 90 ft. span.

DRY BULK FACILITIES:

Operator	*Location*	*Depth*	*Max. L.O.A.*	*Max. Beam*	*Height of Vessel Waterline to bulwark*	*Chute Travel*	*Loading Rate (N)=Net (L)=Long t.p.h.*
Agrico Chemical Co.	Big Bend	34 ft.	1,500 ft.	120 ft.	47 ft.	1,500 ft.	3,000 (N)
CF Industries Inc. (Port Authority Berth No. 204)	Holland Terminal	34 ft.	600 ft.	85 ft.	50 ft.	Stationary	960 (N)
Detsco Terminals Inc.	14th St. and Harbor	32 ft.	380 ft.*	80 ft.	40 ft.	350 ft.	1,250 (N)
Eastern Associated Terminals Co.	22nd St. Causeway Boulevard	34 ft.	850 ft.*	120 ft.	50 ft.	400 ft.	3,000 (N)
Gardinier Inc.	Highway 41 South	30 ft.	500 ft.*	80 ft.	51 ft.	335 ft.	400–900 (L)
IMC Phosphate Terminal Co.	Port Sutton	34 ft.	800 ft.*	104 ft.	43 ft.	378 ft.	1,800 (L)
Rockport	22nd St. Causeway Boulevard	34 ft.	900 ft.*	120 ft.	50 ft.	600 ft.	3,000 (N)

*Can load longer vessels by shifting during operation.

Shipmaster's Report: Bulk phosphates are loaded in Port Sutton (one berth) and in the East Bay (two berths: Rockport owned by SCL Seaboard Coast Line and Eastern Associated Terminal).

Loading rates: about 1,000 t.p.h. at Port Sutton;
about 1,200 t.p.h. at the two berths in East Bay area.

Trimming: the loading elevators are not equipped with trimming devices. Most cargoes can be trimmed by bulldozers. The bulldozer weighs 5 long tons, and is placed on board with ship's gear. The IMC elevators at Port Sutton and the SCL elevator (Rockport) use shore gear to place the bulldozer on board. A minimum of 8 to 7.5 ft. headroom under the coaming is required for bulldozer trimming.

DRY BULK FACILITIES: Others:

Operator	*Location*	*Depth*	*Berthing Space*	*Handling Equipment*	*Storage Area*	*Product Handled*
Cargill Inc. (Port Authority Berth No. 258)	North 19th St.	27 ft.	700 ft.	Marine leg for unloading and spout loader-rate of 600 tons (30,000 bushels) per hour	Capacity of elevator is 1,000,000 bushels; 8,000 ton bulk warehouse; 4,800 ton bulk warehouse.	Grain and dry bulk agriculture products
Detsco Terminals, Inc.	14th St. and Harbor	30 ft.	540 ft.	None.	Storage area leased out	Salt, cement and caustic soda
Florida Portland Cement Division	Hookers Point	34 ft.	820 ft.	Belt material handling system capable of receiving 4,000 short t.p.h. of aragonite or 1,500 short t.p.h. of gypsum 3 electric, travelling bridge cranes equipped with 2.5 and 3 cu. yd. grab buckets.	800×100 gypsum storage shed; 215,000 barrel holding tanks for fuel storage (for plant consumption) 220,000 ton capacity open storage.	Gypsum rock, aragonite
Ideal Basic Industries, Inc.	Port Sutton	34 ft.	1,038 ft.	2×8 in. pipelines to storage 4×12 in. pipelines to storage.	8 silos with 190,000 barrel capacity. 3 bins with 5,640 ton capacity.	Cement
I.S. Joseph, Co.	Port Tampa	34 ft.	700 ft.	Belt elevator from storage to loading spout. rate of discharge of 500 t.p.h. Direct transfer from rail cars to vessels at 200 net t.p.h.	Silo capacity of 10,000 net tons.	Citrus pellets and other dry bulk products.
National Gypsum Co.	Port Tampa	34 ft.	950 ft.	Receiving hopper and conveyor-unloading rate of 2,000 net t.p.h.	Open area approx. 10 acres.	Gypsum rock
Paktank Florida, Inc.	Pendola Pt., Port Sutton	34 ft.	700 ft.	Dock crane with 80 ft. boom with unloading rate of 400 t.p.h. Loading tower with rate of 1,200 t.p.h.	Building 125 ft.×700 ft. with storage capacity of 50,000 tons. 4 silos with 8,000 ton capacity.	Potash, phosphatic products.
Standard Gypsum Corp. (Port Authority Berth No. 223)	Hooker Point	33 ft.	800 ft.	Evacuator and conveyor system; radial stacker.	4.62 acres	Gypsum
Tampa Electric Co.	Big Bend	35 ft.	788 ft.	200 ft. high travelling tower-conveyors system with unloading rate of 4,000 t.p.h.	24 acres	Coal
Tampa Electric Co.	Port Sutton	30 ft.	450 ft.	2 electric travelling unloading towers equipped with straight-line boom, and receiving hopper-combined unloading capacity of 1,600 t.p.h.	Exact size unknown	Coal and slag

PILOTAGE: Vessel applies for Pilot through radio station WPD and through Agent. Telegraphic address for Pilot is: Tam-pilot. Advance notice is not necessary. However, U.S. Coast Guard requires a 24-hour notice of the vessel's ETA. VHF Channel in Tampa is Channel 12.

5 pilot boats – each are different. All 40-45 ft. motor launches flying "H" flag and carrying prescribed red and white pilot lights. No light or sound signals necessary by vessels requiring Pilots.

Normally pilot boat located between sea buoy and No. 2 Buoy in main channel. During bad weather they are located off lighthouse at Egmont Key. Anchorage within 1 mile area of sea-buoy.

ANCHORAGES: Vessels with good ground tackle can anchor anywhere outside Egmont Bar in depths of 35 to 50 ft. Inside anchorages Southward of Mullet Key in depths of 30 to 35 ft.; and S.W. of Gadsden Point in depths of 29 to 36 ft.

Explosives and quarantine anchorages East of Mullet Key and South of Interbay Peninsula.

(1) Explosives anchorage East of Mullet Key. A rectangular area in Tampa Bay, approximately 4,459 yd. long and 1,419 yd. wide, beginning at Lat. 27° 38′ 30″, Long. 82° 39′ 09″, and extending N.E. to Lat. 27° 39′ 48″, Long. 82° 37′ 15″; thence S.E. to Lat. 27° 39′ 17″, Long. 82° 36′ 46″; thence S.E. to Lat. 27° 37′ 52″, Long. 82° 38′ 38″; thence N.W. to point of beginning. Anchorage is used by vessels awaiting loading or unloading at Port Tampa where duration of anchorage will exceed 72 hours.

(2) Temporary explosives anchorage South of Interbay Peninsula. Beginning at a point bearing 107°, 1,750 yd. from Cut F Range Front Light; thence to a point bearing 125° 2,050 yd., from Cut F Range Front light; thence to a point bearing 180°, 1,725 yd., from Cut F Range Front Light; thence to a point bearing 222°, 2,180 yd., from Cut F Range Front Light; thence to a point bearing 251°, 1,540 yd., from Cut F Range Front Light; and thence to the point of beginning. Anchorage is used for vessels engaged in loading explosives when duration of the anchorage is less than 72 hours.

(3) Temporary explosives anchorage off Port Tampa. A circular area with a radius of 200 yd. with the point at Lat. 27° 50′ 22″, Long. 82° 34′ 15″.

(4) Quarantine anchorage. S.E. of the temporary explosives anchorage, beginning at a point bearing 97° true, 4,370 yd., from Cut F Range Front Light; thence to a point bearing 113° 30′, 5,370 yd., from Cut F Range Front Light; thence to a point bearing 161° 30′, 3,770 yd., from Cut F Range Front Light; thence to a point bearing 163° 30′ 2,070 yd., from Cut F Range Front Light; thence to the point of beginning.

RESTRICTIONS: Draft recommendation is 33 ft. 6 in. No tidal restrictions with exception of loaded vessels into Port Tampa.

Existing channels:

Name of Channel	*Width (ft.)*	*Length (naut. miles)*	*Depth MLW (ft.)*
Egmont Channel	600	3.9	36
Mullet Key Channel	500	2.9	34
Tampa Bay Channel Cuts A-F	400	13.6	34
Gadsden Point Cut	400	3.1	34
Hillsborough Bay Cut A, C & D	400	7.6	34
Seddon Channel	300	1.1	34
Garrison Channel	275	0.4	30
Ybor Channel	400	0.9	34
Sparkman Channel	400	1.2	34
East Bay Channel and Turning Basin	2,700	1.5	34
Port Tampa Channel	400	7.3	34
Port Sutton Channel	280	1.0	34
Alafia River Channel	200	3.4	30

MAX. SIZE: Max. draft 34 ft. MLW. No limit on length and breadth.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Miami Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Radio station "WPD" should be used by vessel to route ETA cables to Agents, receivers, etc. Station KUZ 383 on Channel 25 VHF, available for public messages.
TUGS: Positions are:

Main port area – right past Beacon No. 35
Port Sutton & East Bay – Beacon No. 29
Port Tampa – Cut "K"
East Tampa – Beacon No. 16

Tug's lines only.

Facilities available for smaller vessels.

Operator	*Depth*	*Berthing Space*	*Product Handled*
Bay Con Industries	9 ft.	685 ft.	Shell
International Salt Co.	10 ft.	170 ft.	Salt
Morton Salt Co.	14 ft.	600 ft.	Salt
Paktank Florida, Inc.	12 ft.	500 ft.	Grain fertiliser, materials, potash, caustic soda, salt.

BRIDGES: The Sunshine Skyway Bridge spans lower Tampa Bay. The twin central cantilevered span has a navigation clearance of 800 ft. and a maximum vertical clearance of 151 ft. at MLW.
STEVEDORES: Stevedoring gangs must be ordered approximately 24 hours in advance (before 1700 hrs on day before needed).
MEDICAL: Advance notice for medical attention not required, but is preferable. All U.S. ports require valid certificate of vaccination (renewable every 3 years) for smallpox.

TANKERS:

Company	*Pipe lines*	*Berthing space*	*Depth*
U.S. Government	(2) 8″	550 ft.	32 ft.
Amoco Oil Co.	(1) 12″ (2) 10″	275 ft.	30 ft.
American Petrofina	(2) 10″ (5) 8″	600 ft.	31 ft.
Brimstone Terminals	(1) 14″ (Liquid Sulphur)	700 ft.	34 ft.
Chevron	(3) 8″ (Asphalt)	320 ft.	16 ft.
Cities Service	(3) 10″	563 ft.	28 ft.
Florida Power Corp.	(3) 8″ (2) 6″	500/700 ft.	30 ft.
W. R. Grace	(1) 10″ (Ammonia)	200 ft.	34 ft.
Gulf Oil Co.	(3) 14″ (2) 10″ (1) 8″ (2) 6″ (2) 6″	650 ft.	32 ft.
Union Carbide Corp	(7) 4″ (Petro-chemical)	800 ft.	34 ft.
Exxon Co. U.S.A.	(1) 10″	300 ft.	18 ft.
Marathon Oil Co.	(2) 12″ (3) 8″	800 ft.	32 ft.
Murphy Oil Co.	(1) 12″ (1) 8″ (1) 6″	500 ft.	34 ft.
Petroleum Packers	(1) 6″	600 ft.	34 ft.
Phillips Petroleum	(2) 12″	300 ft.	34 ft.
Union Oil Co.	(5) 10″	880 ft.	34 ft.
Shell Oil Co.	(1) 12″ (1) 10″ (4) 8″	850 ft. 250 ft.	34 ft. 34 ft.
Sulphur Terminal Co.	(2) 10″ (1) 4″ (Liquid Sulphur)	700 ft.	34 ft.
South State Terminals	(3) 10″ (1) 12″ (2) 6″ (Phosphoric Acid) (1) 6″ (Caustic Soda)	800 ft. 2560 ft.	34 ft. 34 ft.
Chevron U.S.A.	(3) 12″ (5) 8″ (6) 6″	880 ft.	32 ft.
Sun Oil Co.	(2) 6″	450 ft.	26 ft.
Tampa Electric Co.	(2) 10″	550 ft.	28 ft.
Texasgulf Inc.	(1) 10″ (1) 4″ (Liquid Sulphur)	380 ft.	32-34 ft.
Pasco Terminals Inc.	(1) 10″ (Liquid Sulphur)	525 ft.	30 ft.
Texaco Inc.	(5) 8″ (4) 6″ (7) 4″	250 ft.	33 ft.
Gardinier Inc.	(1) 12″ (Sulphur) (1) 10″ (Phosphoric acid)	448 ft.	32 ft.
Warren Petroleum Co.	(1) 4″ (Propane)	325 ft.	12 ft.
Royster Co.	(1) 16″ (Anhydrous Ammonia)	1760 ft	34 ft.
Western Fuels	(1) 12″ (1) 14″	750 ft.	34 ft.
Intercontinental Terminals	(1) 12″ (Phosphoric acid)	1500 ft.	34 ft.

Note that part of above terminals use same piers. Most terminals have residue discharge facilities.

DENSITY: Density is affected by local rains due to Hillsborough River. Seasonal variances too great to allow advance prediction.
FRESH WATER: Available all over port and delivered through hoses and meters. Rates of delivery various.
FUEL: All grades and types available, including all types of blended fuel and Bunker "C". 24 hour notice required. All types of lube-oil available with delivery in bulk or drums – 24 hours notice is required. Major oil companies (i.e. Shell, Amoco Oil, Texaco, Gulf, Chevron, etc.) represented in Tampa. Delivery ex pipe-line, barge or truck.
PRECAUTIONS: No specific precautions other than usual.
DEVELOPMENTS: The Tampa Port Authority has three new projects under construction: a roll-on/roll-off dock capable of handling the largest vessels in the trade; a liquid bulk dock to accommodate vessels up to 900 ft. in length with 43 ft. drafts; and a dry dock to accommodate vessels up to 900 ft. in length. All three facilities are scheduled for completion in late 1978.
Dredging operations are underway by: the U.S. Corps of Engineers to deepen the main harbour channels from 34 to 43 ft. Completion of the project is scheduled for 1982.
GANGWAY/DECK WATCHMEN: Watchmen not necessary, but available when required.
OPENING/CLOSING HATCHES: Longshoremen open and close hatches.
CERTIFICATES:

Documentation Papers.
Load-line Certificate.
Certificate of Safety at Sea (when carrying passengers).
Certificate of Safety Equipment.

CUSTOMS ALLOWANCE: Tobacco, 2 packs of cigarettes per day per man, wine and/or Spirit, no set amount. Each boarding officer has different views (i.e. German and Scandinavian vessels allowed 2 bottles of beer per day per man). Allowances made within reasonable bounds at Master's discretion subject to boarding officer's approval.
CARGO GEAR: No local special safety requirements. Longshoremen and U.S. Department of Labor requirements are uniform over the U.S.
IDENTIFICATION CARDS: Passports required.
CONSULS: The following countries are represented in Tampa:

Belgium
Colombia
Denmark
Ecuador
El Salvador
Finland
France
Germany
Honduras
Korea
Mexico
Nicaragua
Norway
Sweden
Turkey

REPAIRS: All types are possible.
DRY DOCKS: Graving dock: 525 ft. long on bottom × 80 ft. wide, and depth over keel blocks 16-18 ft. at MHW. New graving dock to be completed late 1978, 900 ft. long × 150 ft. wide (See "Developments"); Dry dock: 200 ft. long × 65 ft. wide there are 2 other dry docks besides those listed above.
REPATRIATION: No foreign crew pools in Tampa (located in New Orleans, San Francisco and New York). But crew changes can be made when Master radios requirements to Agent who arranges with local consul or through crew pool in nearest city named above for applicable country (if no consul is available in Tampa). American crew pools for all unions in Tampa.

Repatriation available at Tampa International Airport and is handled by consul or Master.
AIRPORT: Tampa International Airport served by regular airlines and located approximately 5 miles from main port area; 5 miles from Port Tampa and 16 miles from East Tampa.
TIME: Tampa normally on Eastern Standard time with Daylight Saving Time in effect from last Sunday in April to last Sunday in October.
HOLIDAYS: New Year's Day (January 1st); Jan. 15th (Martin Luther King's Birthday); Gasparilla Day (2nd Monday in February, local holiday); Lincoln's Birthday (February 12th); Washington's Birthday (3rd Monday in February); Good Friday; Memorial Day; Independence Day (July 4th); Labour Day (1st Monday in September); Columbus Day; Veterans Day; Election Day;Thanksgiving Day (last Thursday in November); Christmas Eve; Christmas (December 25th).

When any of these holidays fall on a Sunday, they will be observed on Monday following. Work on these holidays by special arrangement only.
POLICE/AMBULANCE/FIRE: Police 223-8521; Ambulance 223-1551; Fire 223-4211.
TELEPHONES: Installation of telephone aboard can be arranged.
SERVICES: Compass adjustments available; radio direction finder; radar repairs; tank cleaning.
SHORE LEAVE: Immigration authorities grant clearance after examination of passport or bona fide seaman's papers.
DELAYS: Delay can be expected in loading phosphate rock (1 or 2 days), and same delay applicable for berthing at elevators. No delays in general cargo loading or berthing and bunkering.
AUTHORITY: Tampa Port Authority.

TEXAS CITY, Texas: 29.22 N. 94.53 W. **(See Plan Book)**

DOCUMENTS, PILOTAGE, etc., refer to "Galveston".
RESTRICTIONS: Controlling depth in entrance channel 40 ft. Otherwise restricted by depth available at berth. Vessels enter day and night.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Houston Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
TUGS: Available if required.
BERTHING:

American Oil Tanker Docks	depth	36 ft.
Monsanto Tanker Dock	,,	36 ft.
Texas City Oil Docks	,,	36 ft.
Union Carbide Terminal	,,	34 ft.
Import Crude Terminals:		
Docks 40–41	depth	40 ft.
Arco Docks No. 11–12	,,	40 ft.*

*(Completion expected Spring 1979)
MEDICAL: All medical assistance available.
DENSITY: Brackish.
FRESH WATER: Available at all wharves except Union Carbide Terminal.
FUEL: Bunker C available to tankers loading/discharging. All grades available by barge from Houston.
GANGWAY/DECK WATCHMEN: Required only if crewmen detained by Immigration.
CUSTOMS ALLOWANCE: Each man 300 cigarettes or 100 cigars or 1 lb. tobacco. 1 qt. wine/spirits.
CONSULS: See "Houston".
TIME: Central Standard Time. Daylight saving time effective from April to October.
SHORE LEAVE: No restrictions unless detained by Immigration.
SHIPMASTER'S REPORT: February, 1979.
Restrictions: Vessels on maximum draft must be clear of Texas City channel before dark. There is no sailing or berthing during darkness.

For large vessels it is necessary to ballast during discharge otherwise shore connections become too high.
VHF: Channel 13 from sea and Channel 14 for berthing.
Tugs: Usually 6 for vessels on maximum draft.
Tankers: Large tankers dock at Docks 40 & 41 usually starboard side to. On either dock it is not easy loading stores from the dock. 2×12 in. connections.
Consuls: British Consul at Houston.
Customs Allowances: All souvenirs to be collected (items intended as presents) and sealed.
Repatriation: As with all U.S. ports must make out Form I-408 – application to pay off or discharge alien crewman.
Airport: At Houston.
Telephone: Pay telephone at bottom of gangway.
General: Will require ship's gangway abaft of manifold if bottom of gangway is more than 115.5 ft. (35.20 m.) abaft after manifold with a freeboard of 23 ft. or more.
AUTHORITY: Texas City Terminal Railway Co.

TOLEDO, Ohio: 41.42 N. 83.28 W. **(See Plan Book)**

Refer to "St Lawrence Seaway" for important general information.
PILOTAGE: By Seaway Pilots.
RESTRICTIONS: Navigation season from mid-March to end-December, approx. The port is connected to Lake Erie by an entrance channel, depth 27 ft. Vessels size restricted by Seaway locks.
MAX. SIZE: 730 ft. length; 26 ft. draft. Height restriction of 108 ft. above water-line which applies to grain berths only.
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Chicago Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
RADIO: Master must give at least 24 hours notice to Commander 9th Coast Guard District, Cleveland, Ohio, of the vessel's ETA at Snell Lock. Also, at least 24 hours notice of ETA at first U.S. discharge port is required. Toledo Port can be contacted through Lorain, Ohio or Port Colborne, Ontario.
TUGS: Available. Not compulsory, but sometimes necessary in bad weather.
BERTHING:
C & O Railway Dock: 2,000 ft. long, 26 ft. depth alongside.
Lake Front Dock: 1,200 ft. long, 26 ft. depth alongside.
Interlake Steel Corporation: 23 ft. depth alongside.
Mid States Terminals: 27 ft. depth alongside.
Cargill, Inc. Elevator: 27 ft. depth alongside.
Port Authority Facility: 4,100 ft. long, 27 ft. depth alongside.
Anderson Elevator: 27 ft. depth alongside.
CARGO HANDLING FACILITIES: 3 grain elevators at Toledo load vessels at 50,000 b.p.h. There are 6 coal-loading machines, each of which can dump 1×100-ton car per minute, also 1 machine which dumps 2 cars simultaneously, for a max. of 6,000 t.p.h. There are 7 Hulett ore machines; unload lake vessels at a rate of 4,000 t.p.h. Bulk liquids handled include petroleum products, industrial molasses, palm kernel oil, liquid sugar, trichlorethylene and perchlorethylene.
CRANES: Located at Port Authority Facility No. 1 – electric gantry cranes 72.5 and 110 tons. Four 25-ton gantry cranes.
BRIDGES:
Bridges crossing Maumee River:

Miles above Mouth	*Draw Openings – Clear Width (1)*			*Clear Height above LWD (ft.)*
	Right (ft.)	*Centre (ft.)*	*Left (ft.)*	
Toledo Terminal Railroad (Swing – Railroad)				
1.3	145	—	143	22.2(2)
Norfolk and Western Railway (Swing – Railroad)				
2.1	136	—	145	20.1(2)
Craig Memorial Bridge (Bascule(3) – Highway)				
3.6	—	200	—	48.0(4)
Penn Central Transportation Co. (Swing – Railroad)				
4.2	115	—	115	17.7(2)
Cherry Street (Bascule(3) – Highway)				
4.6	—	200	—	31.3(5)
Anthony Wayne (Fixed(6) – Highway)				
5.2	—	747	—	108.2(7)
Penn Central Transportation Co. (Swing – Railroad)				
6.0	115	—	115	17.3(2)
M.V. DiSalle (Fixed – Highway)				
7.0(8)	110	—	110	45.0

(1) Right and left sides proceeding upstream.
(2) Closed position.
(3) Double leaf.
(4) Clearance in centre in closed position, reducing to 39.5 ft. at sides of span.
(5) Clearance in centre in closed position, reducing to 17 ft. at sides of span.
(6) High-level.
(7) Clearance on centre line of 400 ft. channel, reducing to 104 ft. at channel lines.
(8) Upstream limit of deep-draft navigation.

STEVEDORES: Provided by Toledo Overseas Terminal, Inc.
TANKERS:
Hocking Valley Pier: 22 ft. depth alongside.
Ashland Oil Company: 22 ft. depth alongside.
Standard Oil Company: 23 ft. depth alongside.
Gulf Refining Co.: 21 ft. depth alongside.
DENSITY: Fresh water.
MEDICAL: All facilities available.
FRESH WATER: Obtainable by pipe-line at all general cargo docks.
FUEL: All grades available at oil piers, and by harbour fuel barge.
REPAIRS: Major repair facilities available.
DRY DOCKS: No. 1: 510 ft.×72 ft. 6 in.; No. 2: 641 ft.×78 ft.
DEVELOPMENTS: Major construction projects by the three riverfront grain operators will increase grain handling capacity from present 10.2 million bushels to over 18 million bushels by 1979. A new 6 million gallon facility for storage of liquid fertiliser is planned and an additional ship loading dock is under construction.
AUTHORITY: Toledo – Lucas County Port Authority.

VALDEZ, Alaska: 61.07 N. 146.21 W.
Also see "Valdez Marine Terminal".

Located at head of Valdez Arm in Prince William Sound.
APPROACHES: Via Prince William Sound to the Valdez pilot station.

DOCUMENTS: See "Anchorage, Alaska".
PILOTAGE: Pilots board approx. 2 miles North of Busby Light.
MAX. SIZE: Harbour depth over 300 ft. Tides: diurnal range 12 ft. Also see "Berthing" and also see "Valdez Marine Terminal".
HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.
AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).
ANCHORAGE: Excellent, close by dock. Bay is too deep.
CUSTOMS: Quarantine, local, Immigration and Customs from Anchorage.
TUGS: Limited availability.
BERTHING: 1. Valdez City Dock: 36 ft. MLLW. 600 ft. long by 40 ft. wide. 2 warehouses, 1 heated, 1 unheated. Stevedore provides equipment which includes fork-lifts and 2×100-ton mobile cranes and 1×150-ton mobile crane. Dock operated by North Star Stevedoring Co.
STEVEDORES: 3 gangs.
TANKERS: *Valdez Dock Co., Petroleum Dock:* Length 200 ft., width 40 ft., depth 36 ft. at MLLW.

Also see "Valdez Marine Terminal".
REPAIRS: Minor repairs only.
FRESH WATER: Available in temperate seasons.
FUEL: Not available.
MEDICAL: 150-bed mental patient hospital; 15 beds for local use; 1 doctor, 1 dentist regularly from Anchorage.
TRANSPORTATION: Air; highway to Fairbanks and Anchorage.

VALDEZ MARINE TERMINAL: 61.05 N. 146.24 W. (See Plan Book)

OPERATORS: Alyeska Pipeline Service Company.

The terminal does not provide any tug, launch or pilotage assistance for the berthing or unberthing of tankers calling at the terminal. These services, as well as any other tanker services, must be arranged separately by tanker owners.

LOCATION: The Trans-Alaska Pipeline Valdez Marine Terminal is situated on the Southern shore of Port Valdez.

Port Valdez is a natural deep-water fjord located at the N.E. part of Prince William Sound which provides access from the Gulf of Alaska. Port Valdez is about 12 miles long and 2.5 miles wide, is surrounded by steeply rising mountains, and remains ice free throughout the year. The approach to Port Valdez is by way of Valdez Arm, a deep-water channel with a minimum width of approximately 3,000 ft.

The overland approach to the site, which is close to the mouth of the Lowe river, is by road about 6 miles long connecting the terminal with the Richardson Highway. The town of Valdez is 14 miles from the terminal by this route. The distance by boat across to Port Valdez is approx. 2.5 miles.

The terminal operates 24 hours per day, 7 days per week, throughout the year.

The administrative offices will normally be open between 0800 and 1700 hrs., Monday through Friday. The office telephone number is (907) 835–2261.

DOCUMENTS:

Certificate of Financial Responsibility.
SOLAS Safety Equipment.
SOLAS Safety Construction, or for U.S. documented vessels: U.S. Coast Guard Certificate of Inspection.
SOLAS Radiotelegraphy Certificate.
Crew Lists.
De-rat Certificate.
Clearance from Last Port.

PILOTAGE: The Pilot boards off Cape Hinchinbrook. Arrangements to be made by vessel's Agent.

ARRIVAL ADVICE: Masters of vessels bound for the terminal must advise the terminal as follows:

Last Port ETA: Tankers en route to the terminal, upon departure from their last port of call prior to Valdez, will send a telegram or telex to Alyeska Pipeline Service Company, Valdez, Alaska, Telex No. 090-35-469 (Answerback: Alyeska Valz) advising the estimated Alaskan local time and date of arrival.

72-hour ETA: Not less than 72 hours, unless transit time is less than 72 hours, prior to arrival at Cape Hinchinbrook, tankers will send a telex or telegram to Alyeska Pipeline Service Company providing the terminal with the following information:

a. ETA at Cape Hinchinbrook.
b. Position/course/speed.
c. Estimated fore and aft draft upon arrival.
d. Quantity of ballast to be pumped ashore and grade of last cargo.
e. Quantity of oil to be loaded.
f. Distance from the bow to cargo manifolds.
g. Size, number and type of cargo connections.
} At first call to Terminal. Not necessary on subsequent voyages.
h. Amount of provisions and stores to be loaded.

Final ETA: Tankers will send a final ETA, 24 hours in advance of their arrival. This 24 hour ETA shall be as accurate as possible and tankers will notify the terminal whenever the arrival time changes by more than 3 hours.

Notice of Arrival: After entering the Coast Guard's Prince William Sound Vessel Traffic Service, vessels ready to commence loading or deballasting should give immediate notice to the terminal. This notice is extremely important as it can affect berthing priority.

Coast Guard Notification: Terminal will advise USCG at Valdez of all ETA's received.

AMVER Participation: The notice of arrival requirement to be given to the U.S. Coast Guard Captain of the Port in Valdez, Alaska, can be met if vessels participate in the Automated Mutual-assistance Vessel Rescue System (AMVER). Participation in AMVER will also make the Coast Guard's Prince William Sound Vessel Traffic Service aware of the tankers that will be entering the service.

Initial Radio Contact: Ship-to-shore radio telephone calls can be made to the terminal, (907)-835-2261, 24 hours a day by normal commercial Channels.

RADIO: All times are GMT – following information produced as a "guide" and subject to change.

Weather Broadcasts:
Weather Service Offices:
Announcement: 2182 kHz.
Broadcast: 2382 kHz AM/SSB
Alternate: 2512 kHz AM/SSB

Station		*Times (GMT)*
Annette	(KGD 58)	0400, 0600, 0800, 1500, 2100.
Juneau	(KC 197)	0325, 0525, 0925, 1225, 1525, 2125.
Yakutat	(KGD 91)	0200, 0300, 0500, 1400, 1700, 1800, 2000.

Coast Guard Stations
Announcement: 2182 kHz
Broadcast: 2670 Kodiak also on 6521.8 kHz (SSB) upper side band

Station		*Times (GMT)*
Biorka	(NMJ 18)	0100, 0800, 1300, 2000.
Ketchikan	(NMJ)	0115, 0815, 1315, 2015.
Ocean Cape	(NMJ 19)	0145, 0845, 1345, 2045.
Kodiak	(NOJ)	0200, 0445, 0900, 1415, 1645, 2100.

Radiotelegraph (CW) Broadcasts of marine weather forecasts Coast Guard Stations.

		Freq.	*Times (GMT)*
Ketchikan	(NMJ)	416	0530 hrs., 1730 hrs.
Kodiak	(NOJ)	470	0630 hrs., 1930 hrs.

Broadcast Notice to Mariners: Broadcast Notice to Mariners are disseminated on the following schedules:

Safety Broadcast:

(1) RADSTA Ketchikan (NMJ). (a) Code (CW) — Last 15 seconds of 1st Silent Period after receipt, next on operator schedule and repeat text only on next scheduled broadcast unless message cancelled. Additional broadcasts as directed, preliminary call on 500 kHz, broadcast on 416 kHz.

(2) COMMSTA Kodiak (NOJ). Voice (AM) — Upon receipt, repeat text only on next scheduled broadcast. Additional broadcasts made as directed with preliminary call on 2182 kHz, broadcast on 2670 kHz.

(3) RADSTA Adak (NOX). Code (CW) — Last 15 seconds of 1st Silent Period after receipt, next on operator schedule and repeat text only on next schedule broadcast unless message cancelled. Additional broadcasts as directed, preliminary call on 500 kHz, broadcast on 450 kHz.

(4) RCA — Alascom Ketchikan (WGG 58). Voice (AM) — On 2400 kHz upon receipt and as directed in broadcast instructions.

(5) RCA — Alascom Ketchikan (WGG 56). Voice (AM) — On 2400 kHz upon receipt and as directed in broadcast instructions.

Note: Watch hours (GMT) for single operator ships:

West Coast	*Central Pacific*
0000–0200 hrs.	0000–0200 hrs.
0400–0600 hrs.	0400–0600 hrs.
1600–1800 hrs.	0800–1000 hrs.
2000–2200 hrs.	2000–2200 hrs.

Scheduled Broadcasts: (Routine Precedence)

(1) RADSTA Ketchikan (NMJ)
(a) Code (CW) — 416 kHz — 0530Z and 1730Z
(b) Voice (AM) — 2670 kHz — 0630Z and 1800Z
(2) COMMSTA Kodiak (NOJ).
(a) Code (CW) — 2670 kHz — 0630Z and 1930Z
(b) Voice (AM) — 2670 kHz — 0445Z and 1645Z
(3) RADSTA Adak (NOX). Code (CW) — 450 kHz — 0430Z and 2130Z
(4) RCA — Alascom Juneau (WGG 58). Voice (AM) — 2400 kHz — 0830 hrs., 1300 hrs. and 1830 hrs. (local time).
(5) RCA — Alascom Ketchikan (WGG 56). Voice (AM) — 2400 kHz — 0830 hrs., 1300 hrs. and 1830 hrs. (local time).

TUGS: Three 5,750 h.p., twin-screw tugs and two 300 h.p., single-screw mooring launches are on standby at the terminal to provide oil spill containment, cleanup and contingency services and fire fighting services as required by the terminal. The tugs are equipped with telescoping fire monitors and will be capable of providing 3,500 g.p.m. of foam or firewater at 150 p.s.i.g. at an elevation 70 ft. above the tug's waterline. The tugs are equipped with VHF-FM radio-telephone communication equipment. Should tankers desire to contact the tugs, the tugs may be reached by calling on Channel 16 (156.80–mHz).

The tugs and mooring launches are available to provide berthing and unberthing services to tankers calling at the terminal.

VHF: The Alyeska Pipeline Service Company operates a VHF-FM base station in Valdez, Alaska under the call sign "WAB-952". This base station is maintained for the purpose of transacting company business with either inbound or outbound vessels and is open 24 hours a day. The official language for all communications shall be English.

Channel	Frequency	Use	At
10	156.500–mHz	Intership and Ship to Coast Guard	A–B–C
16	156.800–mHz	Distress – Safety and Calling	A–B–C

A – Contingency Management Centre
B – Oil Contingency Warehouse
C – Operational Control Centre

The VHF-FM marine radio system utilized by the terminal is compatible with the Prince William Sound Vessel Traffic Service which is operated by the U.S. Coast Guard in Valdez, Alaska. The USCG Vessel Traffic Service will have VHF–FM radio-telephone coverage extending beyond Cape Hinchinbrook and including Prince William Sound, Valdez Arm, and Port Valdez. The tugs available at the terminal will also be equipped with VHF–FM transceivers.

TANKER REQUIREMENTS: *General:* Certain requirements of governmental agencies are in effect at the terminal in order to minimize the chances for a pollution incident. These requirements apply to all tankers calling at the terminal.

Operations at the terminal are primarily aimed toward the safe loading of tankers and the prevention of collisions and groundings of vessels that call at the terminal. These aims will be met by insisting upon and utilizing conventionally constructed tank vessels manned by skilled crews, use of positive vessel traffic control within Prince William Sound and Port Valdez, and use of all traffic advisory and communications services in West Coast ports. The purpose of the following requirements for tankers calling at the terminal is to materially enhance tanker loading and discharge operations and to increase the safety of navigation so that the danger of pollution from oil spills is substantially reduced.

Safe Navigation: Tankers will observe the rules and directions issued by the U.S. Coast Guard as operator of the Prince William Sound Vessel Traffic Service. These rules and directions will pertain to communications check points, ETA's, traffic lane separation, anchorages, one-way traffic, speed, etc.

In addition to the normal instruments used in celestial navigation and piloting (sextant, pelorus, etc.), the following electronic devices must be aboard and in good working order:

a. Fathometer/Depth Sounder.
b. Loran C Receiver.
c. Two Independent Radar Systems.
d. Radio Direction Finder.

All vessels must have a qualified Pilot aboard for the transit of Prince William Sound and Port Valdez.

Communications: Tankers calling at the terminal will be required to have the following communications equipment aboard and in good operating condition:

a. VHF–FM radio-telephone with sufficient Channels and speakers to comply with the Prince William Sound Vessel Traffic Service operating rules and the Bridge-to-Bridge Radiotelephone Act.
b. Radiotelegraph.
c. Portable UHF transceiver will be supplied by the terminal.
d. Single sideband radio.

The portable UHF transceiver shall have at least five Channels which are tuned to the berth frequencies listed.

Additional Equipment: Tankers calling at the terminal will be required to have the following additional equipment:

a. Tankers must carry standard 6 in. hose sufficient to make at least 50 ft. in length for emergency lightering purposes.

b. Accommodation ladders and Jacob's ladders must be of sufficient integrity and free from ice and snow to permit safe embarking and disembarking by the Pilot.

c. Mooring lines must be of sufficient size, strength, and quantity to permit safe mooring of the vessel.

d. Manifold reducers, connectors, and extensions must be made of steel. Cast iron reducers will not be permitted.

e. Tankers which call at the terminal will be required to retain all solid waste refuse aboard the vessel, or use a suitable sewage treatment plant before discharge.

f. All ullage caps will remain closed during loading except during gauging or sampling.

Operational Requirements: The following procedural and operational requirements are listed in order to make tanker Owners and Masters aware of some additional safety and anti-pollution measures in effect at the terminal. These requirements will be restated in the sections pertaining to the pre-loading inspection and cargo loading.

a. No repairs to radars shall be made while a vessel is moored to the loading berth unless authorized by the Terminal Marine Supervisor.

b. The tanker's main CW wireless set must be de-energized and switched off while alongside the loading berth.

c. Tank tops shall remain closed during loading operations. Petroleum vapours shall be vented through mast risers or stand pipes at an appropriate height above the main deck.

d. Ship's crew will be responsible for connecting and disconnecting loading arms to and from the vessel's cargo transfer manifold. Assurance that the arms are secured properly without damage shall be observed during pre-loading inspection. However, as a convenience the shore crew will aid the ship's crew in connecting loading arms to the ship's manifold as the shore crew will be more familiar with the shoreside facility connection.

e. All sea valves connected to the cargo piping system shall be sealed in the closed position prior to loading oil.

f. Prior to commencement of loading operations, a joint inspection of the vessel and a pre-transfer conference will be held by the Terminal Marine Supervisor and the tanker officer in charge.

g. No repairs that would result in immobilization of the vessel shall be carried out while alongside of the loading berths unless the Terminal Marine Supervisor specifically authorizes such work.

BERTHING: *Berth Priority:* Berth priority and berthing order will be determined by the Terminal Marine Superintendent who will use the general guideline of assigning tankers and berths in the order by which tankers enter the Prince William Sound Vessel Traffic Service and are in all respects ready to discharge ballast or load.

Procedures: Tugs wil be dispatched by the Marine Shift Supervisor to meet inbound tankers and to assist in berthing at the nominated berth. The Master shall remain solely reponsible, on behalf of his owners, for the safety and the proper navigation of his vessel. Manoeuvring power must be available on the main engines during berthing operations. The positioning of the tanker's loading manifold in relation to the metal loading arms has to be carried out to a proper alignment, as required by the berth operator.

Maximum Allowable Berthing Velocities: The following table gives the designed maximum allowable berthing velocities for Berth Nos. 1, 3, 4, and 5. The velocities are given in inches per second for the various size tankers in the 40% ballast condition:

	Berth No. 1	Berth Nos. 3, 4 and 5
85,000 d.w.t.	9 in./sec.	12 in./sec.
120,000 d.w.t.	8 in./sec.	11 in./sec.
265,000 d.w.t.	—	7 in./sec.

Note:
(a) 1 knot=20.2 in./sec.
(b) Velocities are given for a line normal (perpendicular) to the axis of the dock or the berthing dolphins.

Mooring Hooks and Mooring Capstans: Each berthing dolphin and each mooring dolphin will be equipped with a mooring capstan and either 2 or 3 quick-release mooring hooks. Berthing dolphins will have double quick-release hooks, and the mooring dolphins will have triple hooks.

The recommended mooring line arrangement diagrams included in the "Plan Book" show the location of these double and triple hooks. Since Berth No. 1 has no berthing dolphins, the 4 double quick-release hooks are located on the loading dock.

These mooring hooks are designed to service 1 mooring line per hook. Thus, no more than 3 lines should be led to any mooring dolphin nor should more than 2 lines be led to any berthing dolphin. These mooring hooks may be released either locally or by remote control from the berth operator's control position.

Each mooring capstan will be mounted on, and form an integral part of, the associated double or triple quick-release mooring hook. This will provide a mooring capstan to assist in securing mooring lines at every berthing dolphin, mooring dolphin, and on the floating berth loading dock.

These mooring capstans are designed to give a minimum running pull of 2,000 kg. (4400 lb.) at a rate of 30 m. (98.4 ft.) per minute. The capstan will be positioned at a height sufficient to prevent mooring lines and messengers from becoming snarled on the quick-release hooks.

Mooring launches will be used to assist the tanker in running mooring lines to the mooring dolphins at each berth.

The terminal will provide suitable messengers for heaving in mooring lines from the launches.

Mooring Lines: Mooring arrangements shall be satisfactory to the Marine Superintendent. All critical moorings shall be of similar size and elasticity. Ropes of different material from those used to moor the ship may be used for positioning the vessel but shall not count as part of the final moorings. It is required that in ships of 90,000 d.w.t. and greater all final moorings shall be wire rope. Nylon tails may be used if fitted to all moorings. Ships should be outfitted with sufficient moorings of similar material for normal moorings. Ropes of different material may be used in emergency.

Moorings While Alongside Berth: Tankers must at all times remain adequately secured alongside the berth. Moorings must be kept at an even tension, avoiding a slack line or varying tensioning situation. Should such a situation arise and not be immediately rectified by the ship's crew after communication with the deck officer, the berth operator will suspend any transfer operation. All vessels fitted with tension winches should apply brakes once the tanker is moored and shall not leave winches in the self-tensioning position.

Emergency Towing Wires: While at a loading berth, tankers will provide emergency towing wires positioned at both the offshore bow and stern. The wires shall be in good condition, have an eye in each end, and be of adequate strength to move the vessel off the dock. The outboard eye shall be maintained at water level, and slack aboard ship shall be secured with small pieces of fibre line.

Mooring Line Arrangement Diagrams: (See "Plan Book"). The recommended mooring line arrangement diagrams are provided in the "Plan Book" as guidelines to acquaint the tanker Master with the general mooring line arrangement for the loading berths at the terminal. These arrangements are indicative of the minimum suggested number of lines and do not preclude the Master from using additional lines.

BERTHING FACILITIES: The major ship loading facilities include four independent loading berths, numbered 1, 3, 4 and 5. Berth No. 1 is a floating berth whereas Berth Nos. 3, 4 and 5 are fixed structures.

	Berth No. 1	Berth No. 3	Berth No. 4	Berth No. 5
	(1)	(1) (2)	(1) (2)	(1) (2)
Vessel Size (Design) d.w.t.	16,000 – 120,000	16,000 250,000	16,000 – 265,000	16,000 – 265,000
Type of Berth	Floating dock	Fixed loading platform	Fixed loading platform	Fixed loading platform
Deck Level of Berth above MLLW	32 ft. 8 in.	36 ft. 7 in.	36 ft. 7 in.	36 ft. 7 in.
Depth Alongside at MLLW (ft.)	160	75 to 87	75	75
Loading Arms (Number × Size)	4 × 12 in.	4 × 16 in.	4 × 16 in.	4 × 16 in.
Max. rate Per Loading Arm (bbls.p.h.)	20,000	27,500	27,500	27,500
Max. Design Flow Rate (per berth) (bbls.p.h.)	80,000	110,000	110,000	110,000
Loading Arm Spacing on Operating Dock (ft.)	11	11	11	11
Maximum Ship Manifold Pressure	Pressure alarm points will be set, based upon information given by ship's officers.	See Berth No. 1	See Berth No. 1	See Berth No. 1
Emergency Shutdown	Can be initiated by berth operator or by OCC shutdown complete within 6.5 seconds after initiation.	See Berth No. 1	See Berth No. 1	See Berth No. 1
Access to Ship	42 ft. aluminium gangway	49 ft. 6 in. aluminium gangway	49 ft. 6 in. aluminium gangway	49 ft. 6 in. aluminium gangway
No. of Mooring Dolphins	4	4	4	4
No. of Berthing Dolphins	0	4	4	4
Mooring Hooks (One line per hook)	One triple hook per mooring dolphin Four double hooks on the operating dock	One triple hook per mooring dolphin One double hook per berthing dolphin	One triple hook per mooring dolphin One double hook per berthing dolphin	One triple hook per mooring dolphin One double hook per berthing dolphin
Potable Water	None	None	None	None
Bunker Facilities	None	None	None	None
Public Telephone	Available ashore in vicinity of berth	See Berth No. 1	—	See Berth No. 1
Minimum Ship Manifold Spacing 1	—	—	—	—
Minimum Ship Manifold Spacing 2	—	6 ft. 9 in.	6 ft. 9 in.	6 ft. 9 in.
Minimum Ship Manifold Spacing 3	—	6 ft. 9 in.	6 ft. 9 in.	6 ft. 9 in.
Minimum Ship Manifold Spacing 4	—	6 ft. 9 in.	6 ft. 9 in.	6 ft. 9 in.
Quick Disconnect Coupling (QDC) Size (in.)	12	16	16	16
Manifold Size Range Acceptable to QDC (in.)	10 to 16	12 to 16	12 to 16	12 to 16

Note: (1) Although all berths are designed to handle vessels in the 16,000 d.w.t. size, loading arm size requires ship's manifolds to be a minimum of 10 in. in diameter. Normally, vessels less than 45,000 d.w.t. will be handled at Berth No. 1.

(2) Because of mooring dolphin limitations, vessels of more than 180,000 d.w.t. would be acceptable only if their deck machinery mooring leads allowed an efficient bow and stern mooring line pattern. In addition to this requirement, distance from bow to manifold and prevailing weather conditions would have to be considered before berthing of such vessels would be authorized.

PRE-LOADING INSPECTION: *Pre-transfer conference and joint safety inspection:* Prior to the discharging of ballast from cargo tanks or loading of oil, a pre-transfer conference and a joint safety inspection will be conducted by the Terminal Marine Supervisor and a responsible deck officer aboard the tanker who will be in charge of bulk liquid transfers aboard the tanker.

The purpose of the pre-transfer conference and the joint safety inspection is to insure that both the terminal and the tanker are suitable and ready for safe loading and handling of oil.

The checklist is designed to meet the following requirements:

a. Section 4.4 of the International Oil Tanker and Terminal Safety Guide which relates to the agreed procedures and safety checks prior to the commencement of cargo loading.

b. Title 46, U.S. Code of Federal Regulations, Section 35.35-30 relating to a Declaration of Inspection for Tank Vessels.

c. Title 33, U.S. Code of Federal Regulations, Section 156.150, relating to a Declaration of Inspection prior to the transfer of bulk liquid cargo from a shore facility to a large vessel.

The checklist is to be taken aboard the tanker by the Terminal Marine Supervisor and shall be used during the pre-transfer conference and the joint safety inspection of the tank vessel to insure compliance with applicable regulations and safety standards. Columns are provided on the checklist for the Terminal Marine Supervisor and the tanker person-in-charge to initial, indicating that the requirements have been met. The original of the checklist shall remain aboard the tanker, and a copy shall be returned to the Terminal Marine Supervisor for subsequent delivery to the berth operator.

Terminal personnel, after giving due notice to the responsible deck officer, are authorized to suspend oil transfer operations if any of the safety rules listed or on the checklist are not observed, or if any other danger is believed to exist.

The Master of the tanker or his representative has the right to shut down loading operations in the event he feels shore operations are unsafe, provided he gives adequate prior notice to the Terminal Berth Operator and Marine Supervisor.

During the pre-transfer conference, the Terminal Marine Supervisor shall provide the responsible ship's officer with a printed sheet detailing description and location of the fire-fighting system and the other emergency systems at the terminal in general and at the berth to which the tanker is moored in particular. The Terminal Marine Supervisor shall also advise the vessel if any unusual or dangerous weather conditions are forecast or expected.

As the shifts on the berth change, the relieving Terminal Marine Supervisor and berth operator shall assure themselves that all conditions pertinent to their responsibilities are as previously agreed to, and shall sign the copy of the Declaration of Inspection. The relieving officer aboard the tanker shall assure himself that the original conditions still exist and shall sign the original of the Declaration of Inspection aboard the tanker. These relieving personnel will then become the person-in-charge of the transfer operation for the terminal and the tanker respectively.

BALLAST: *Ballast Quantities:* The terminal is to be informed of the approximate quantities of segregated clean and dirty ballast in the Master's pre-arrival message. This message should also state where the ballast was shipped and the grade of last cargo.

Ballast Reception Facilities: The terminal facilities will include three 430,000-barrel ballast reception tanks. Discharge of dirty ballast will be by way of the four 12 in. loading arms (Chiksans) on Berth No. 1 and the four 16 in. loading arms on Berth Nos. 3, 4 and 5. These loading arms connect to 20 in. lines at the berths and lead into a 42 in. line connecting each berth to the ballast reception tanks. Although the shore lines are insulated, they are not heat traced and there are no booster pumps to assist in the discharge of dirty ballast.

No. 5 berth is situated approx. 1.25 miles from the reception tanks and has a possible head of 150 ft.

In the event of any stripping problems, it is recommended that tanks containing unpumpable ballast be stripped internally to the slop tank and that the Load-on-top procedures be adopted.

Segregated Ballast: Only segregated ballast will be permitted to be discharged overboard. Segregated ballast is defined as ballast water that is introduced into a tank which is completely separated from the cargo oil and the oil fuel system and which is permanently allocated to the carriage of ballast. The deck log book must record all times of ballast discharge and when pumps are started or stopped. This log must also indicate whether or not the segregated ballast is being dropped in the initial stages to sea level. A close watch must be maintained on the overside discharge, with a deck floodlight or portable explosion-proof light being trained on the discharge during hours of darkness. If there are any indications of discolouration or sheen, discharge must be suspended and an investigation must be carried out. If there is any doubt as to the quality of the segregated ballast, all discharge will be made into the shore reception facilities.

Dirty Ballast: All ballast contained in any compartment or tank used for the carriage of oil will be classed as dirty no matter how clean the ballast may appear to be. No ballast carried in cargo tanks may be discharged at sea or in port.

After the connection of the loading arms has been completed and the suitable valves between the arms and the ballast reception have been opened, permission to commence discharge will be given to the responsible tanker officer by the berth operator who will have received approval from the Operations Control Centre (OCC).

Contact between the tanker and the terminal will be by means of the UHF radio that will be placed on board by the Pilot. As during all transfer operations, there will be a continuous watch near the ship's manifold. In the event of an emergency on the berth, pressing of the emergency alarm will activate the valve closing mechanism.

On hearing this signal, the Crew member at the manifold must stop the ship's ballast pumps to avoid damage by pumping against a closed valve system ashore. (See Emergency Procedures.) On commencing discharge of dirty ballast and at frequent intervals during the discharge, a watch will be kept on the area around the sea valves even though the sea valves have been inspected during the initial safety checks and a seal has been placed on them by the inspecting Terminal Marine Supervisor. Any indications of any oily sheen will necessitate a shutdown of the discharge pumps and an investigation to be carried out before any further ballast can be discharged. Thirty minutes before completion of discharge, the responsible tanker officer will inform the berth operator who will in turn advise the OCC and the duty Terminal Marine Supervisor.

On completion of the discharge and after pumps have been stopped, the loading arm(s) used for dirty ballast discharge must be drained back into the slop tank. On vessels with an inert gas system, gauging will be taken by way of the deck purge pipes to determine that tanks are empty. It is not intended that vessels will depressure cargo tanks for visual inspections, nor should tank lids be opened on any compartment that is not gas free.

All safety regulations applicable during the loading of oil will also apply during the discharge of ballast.

Governmental Ballast Discharge Requirements:

State of Alaska: The State of Alaska requires that the Master of a vessel scheduled to take on any petroleum product or cargo, complete and sign the State of Alaska Department of Environmental Conservation Ballast Water Discharge Certificate Affidavit. To support this affidavit, the Master must be prepared to produce both deck and engine room log books and a legible copy of that portion of the Oil Record Book relevant to the sea passage from last discharge port to the terminal.

Federal Requirements: Prior to loading oil on any vessel, the terminal is required by the United States Department of the Interior to obtain from the Master of the vessel a legible copy of that part of the Oil Record Book that pertains to the voyage of the vessel to the terminal from the vessel's last oil discharge port. This legible copy shall be certified under oath by the Master as being true and correct. If the vessel is not required to maintain an Oil Record Book or similar records, the Master of the vessel is required to provide the terminal with an affidavit, duly sworn to and signed, stating any and all facts bearing upon any discharge of oil or oily water from the vessel during its voyage to the terminal from its last oil discharge port.

Should the Master be unable to comply with the preceding requirement or if it appears from the Oil Record Book or other documentation that a vessel has discharged oil or oily water during its voyage to the terminal, the terminal is required to promptly notify the Department of the Interior's representative, the Authorized Officer. Tankers discharging ballast water or other oily mixtures may be subject to penalties.

OIL CHARACTERISTICS: The predominent oil to be available at the terminal is currently North Slope crude oil. The following preliminary characteristics of North Slope crude oil are given to acquaint the Master and the cargo officers of tankers that will call at the terminal with the general properties of the cargo they will load.

Specific Gravity: 0.888 at 60° F.

API Gravity: 27.8° API.

Pour Point: + 15° F.

Viscosity: 73.5 SSU at 100° F., 169 SSU at 60° F.

Reid Vapour Pressure: Range of likely crude oil vapour pressures will be added, as pumpability is related to vapour pressure.

Sulphur Content: 0.94 per cent by weight.

Waxing: 85-117° F. (begins to precipitate). 50-55° F. (bulk of wax begins to come out of solution).

Mercaptan Sulphur: approx. 20 parts per million.

Loading temperature: approx. 117° F.

Dissolved H_2S: less than 0.2 parts per million.

LOADING FACILITIES: *General:* All loading operations will be accomplished in accordance with the joint inspection pre-transfer conference. Loading operations cannot commence until the vessel has complied with all State of Alaska and Federal Requirements and all required documentation has been provided.

Crew Responsibilities: Ship's crews will be responsible for handling the loading arms on board the tanker, furnishing and making the adaptor connections, removing blind flanges, and guiding the loading arms (Chiksans) to the appropriate manifold connections. However, as a convenience, the shore crew will aid the ship's crew in connecting loading arms to the ship's manifold as the shore crew will be more familiar with the shoreside facility connection. The Chiksan loading arms and couplings are hydraulically controlled by the berth operator who will be in constant voice communication with the individual responsible for the connection by means of the UHF portable radio that will be supplied to all vessels by the docking pilot.

If required, the terminal will supply 8 in. to 10 in. reducers at Berth No. 1 and 10 in. to 12 in. at Berths Nos. 3, 4 and 5.

Checklist Requirements: After the Terminal Marine Supervisor is satisfied that all the safety requirements have been complied with, permission will be given to commence loading. All operations in connection with starting of loading, switching of tanks, and topping off will be the responsibility of the responsible ship's officers.

Before the maximum pressure or loading rates agreed to at the pre-transfer conference are reached, slow loading will be started and the responsible ship's officer will ensure that the cargo is flowing to designated tanks, thus ensuring that all block valves separating lines are open. On completion of this check and after advising the berth operator, the pressure/rate will be increased to the maximum previously agreed by the Master, or the officer in charge.

A responsible member of the crew will remain near the manifold within sight of the berth operator. This is in addition to the officer on cargo watch who, at frequent intervals, will check the state of loading with the berth operator by means of the UHF radio. This officer will also advise the berth operator when changes in the loading rate are required.

The rate of flow into the tanker can be observed on the large digital readout situated by the berth operator's control position.

Loading Suspension: Terminal: Terminal personnel will suspend loading operations if any of the safety rules are not followed, or if terminal personnel supervising loading operations believe any other danger exists, providing adequate notice is given to the responsible ship's officer.

Tanker: The master is required to shut down loading if he feels that shore operations are unsafe, provided adequate advance notice is given to berth personnel.

Emergency Shutdown: In the event of an emergency (See "Emergency Procedures") the following types of shutdown could occur:

(1) "Dangerous" shutdown.
  (a) All berth block valves close.
  (b) Metering upstream block valves close.
  (c) Berth control valves close – one for each loading arm (in 5, 5.5, 6.0, and 6.5 seconds, respectively, to prevent surge to line).
(2) Fire shutdown
  (a) The preceding valve closures plus fire alarm and start fire pumps.
(3) Emergency shutdown, one per arm, closes control valve only.
(4) Low vapour pressure on any crude tank – initiates (1) preceding.

Pushbuttons for (1) preceding are located in berth area plus one on berth operator's alarm panel.

Pushbuttons for (2) 1 on roadway; 1 on roadway at land; 1 in Power Distribution Cabinet (PDC); 1 in Berth Operator Control (BOC) alarm panel; 1 in loading arm area.

Pushbutton for (3) 1 local at each valve.

Topping Off: Near the end of loading when topping off, the responsible ship's officer will request the gradual reduction of loading rate for topping off operations. This reduction will be achieved by the berth operator slowly closing the berth loading valves. The berth operator will progressively reduce the opening of the berth control valves and will take loading arms out of service, until the point when all berth control valves and block valves are finally closed, when advised by the ship's officer "Shut Down" or "Finished Loading". The loading arms will then be drained into a ship's tank.

Disconnecting: On being satisfied that loading arms and ship's manifold are empty, the order will be given from the responsible ship's officer to the berth operator to uncouple the quick release couplings.

During the period of disconnecting, the USCG Vessel Traffic control Centre at Valdez will have been advised. Tugs will be on standby, and providing that there are no other ship movements that would interfere with sailing, the "Early Departure System" will be carried out. The actual Bill of Lading figures will be sent to the master by W/T or Telex after departure.

COMPLETION/DEPARTURE PROCEDURE: *Topping Off:* As the tanker begins the topping off stage, the responsible ship's officer shall notify the berth operator who will in turn keep the OCC informed as the cargo loading rate is reduced. When the ship's officer estimates approximately one hour remains in the loading process, he shall notify the berth operator.

Tug Assistance: After being notified by the tanker that one hour remains in the loading sequence, the berth operator shall notify the OCC and the Terminal Marine Supervisor. The OCC shall continue to monitor the topping off process and the Terminal Marine Supervisor shall place the vessel's pre-arranged tugs on standby.

The tugs shall be alongside the vessel after all loading arms have been disconnected and before any mooring lines are let go.

U.S. Coastguard Vessel Traffic Service: The departure of tankers from the terminal shall be in accordance with the published standard operating procedures for the Prince William Sound Vessel Traffic Service. The Coastguard Operations Centre located in Valdez shall be the directing authority for the operation of the vessel traffic service. The Terminal Marine Supervisor will notify the USCG-VTS one hour prior to the completion of loading and again when loading is complete. When the Terminal Marine Supervisor notifies the USCG-VTS that loading is complete, he will verify the tanker's status to enter the Vessel Traffic Service and will check on any inbound vessel traffic.

SAFETY: After the tanker is secured, the Terminal Marine Supervisor will board the tanker to contact the Master or his representative to:

- provide information on terminal safety regulations.
- agree on designated smoking areas
- advise ship's personnel on "Work Permit" and "Hot Work Permit" procedures.
- present ship/shore Safety Check List.
- present printed sheet describing terminal emergency procedures and fire fighting capabilities.

The following are **some** of the safety requirements.

Warning Signs, Lights, and Signals – Upon arrival at the terminal, a tanker shall display the following notice at the gangway:

WARNING
NO OPEN LIGHTS
NO SMOKING
NO VISITORS

During transfer of oil, and when in the non-gas free condition a red signal (flag by day and electric lantern at night) shall be displayed so that it is visible from all sides.

Blowing tubes – Funnel uptakes and boiler tubes will not be blown while a tanker is berthed at the terminal.

Use of Tools – No chipping or other operation likely to produce sparks will be allowed in any designated hazardous area. The Terminal Marine Supervisor and the responsible ship's officer shall both be satisfied that there is no such activity on the vessel or on the facility.

Flashlights, Hand Torches, Lanterns – Only self-contained battery powered flashlights, hand torches, lamps and lanterns, approved by USCG will be permitted to be used aboard the vessel or on the berths.

Main Engine – While berthed at the terminal, the tanker's main engines, steering machinery, and other essential manoeuvring equipment shall be maintained on standby status to permit the tanker to move from the berth on short notice.

Communications Equipment – A tanker's main transmitter shall be turned off and the main transmitting aerials shall be grounded whenever a tanker is alongside a loading berth at the terminal.

VHF-FM radiotelephone equipment, both portable and fixed, may be used as long as the equipment is permanently installed or intrinsically safe, conforms to FCC marine requirements, USCG requirements, and operates with a power and output of 1 watt or less.

The preceding requirements do not mean that essential servicing of ship's radio equipment cannot take place while alongside a berth. However, suitable arrangements for insuring safety during this work shall be made between the tanker and the terminal, including the securing of an appropriate work permit.

Operating and servicing of radar equipment aboard a tanker berthed at the terminal shall be agreed to by the Terminal Marine Superintendent or Marine Supervisor and shall be the subject of an appropriate work permit.

Vessels Alongside – Unauthorised craft shall be prohibited from securing to a berth at which a tanker is moored.

No craft shall come alongside a tanker while the tanker is handling crude oil or deballasting without the permission of the Terminal Marine Superintendent who shall instruct personnel aboard the craft that smoking, naked light, and galley fire regulations must be observed.

Designated Smoking Areas: Smoking shall be strictly prohibited within an area enclosing all tanker berths and loading docks and on board any tanker while at a berth, except.

(a) in buildings or other shore locations specifically approved for smoking and with such approval notices posted.
(b) on board a tanker in places specified by the Master, and agreed to by the Terminal Marine Supervisor.

Places designated for smoking shall not be outside of any of the accommodation areas. Special precautions shall be taken during conditions that may suggest danger; in particular, conditions of no wind or any indication of unusually high gas concentrations.

The Master is responsible for insuring that all on board are informed of the selected places for smoking and for posting suitable notices.

Only safety matches are permitted in approved smoking areas. The use of lighters is prohibited.

Galley Fires and Cooking Appliances – Galley burners are to be adjusted to insure efficient combustion and to prevent galley stack fires and sparks from incandescent soot. Flues are to be cleaned at regular intervals. When bottled gas equipment is used, the gas shall contain an additive which will give it a distinctive odour. Sufficient fire extinguishers shall always be provided near the galley. Oily rags and fat shall not be allowed to accumulate, and the exhaust fan ventilators shall be kept clean.

While a tanker is at a berth, the use of galley stoves and other cooking appliances with non-immersed elements such as electric hot-plates and toasters shall be permitted provided that the Terminal Marine Supervisor agrees that no hazard exists and that such use is in the galley, in the pantry, or in designated smoking areas.

Work Permits – If repairs are to be carried out on a tanker alongside a berth at the terminal, the responsible ship's officer must discuss and obtain agreement from the Terminal Marine Supervisor on the details of the work to be done. Certain types of repairs will be the subject of written work permits which shall be completed by the responsible ship's officer and authorised by the Terminal Marine Supervisor at the time of the pre-loading inspection check list. These types of repairs include but are not limited to:

(a) Repairs to main engine, steering machinery, or other manoeuvring equipment which might immobilise the tanker.
(b) Repairs to tanker's radiotelephone or communications equipment.
(c) Repairs to radar equipment.
(d) Repairs to galley equipment and cooking appliances.

Hot Work Permits – Any hot work done at the terminal, either on the berth or aboard a tanker moored to a berth must be approved by the U.S. Coastguard Captain of the Port, Western Alaska. This approval will be in the form of a signed Hot Work Permit, issued by the U.S. Coastguard.

EMERGENCY PROCEDURES: Fire: The signal for a fire aboard a tanker moored at the terminal shall be 5 prolonged blasts of the ship's whistle or siren supplemented by a continuous sounding of the ship's general alarm. In the event of a fire within the terminal, the tanker shall be notified by the berth operator and, in addition, the terminal fire alarm will also be sounded.

The initial action required of tankers in the event of a fire within the terminal is to prepare for a shutdown of all loading and ballast water discharge arms. This shutdown will be initiated by the terminal and not by the tanker. In case a shutdown does occur, loading and ballast discharge will not be commenced again until the all clear notification has been received from the Terminal Marine Supervisor.

In the event of a fire aboard the tanker or on the loading berth, the initial actions will consist of shutting down all transfer operations. The standby tug, followed by the other tugs, will be dispatched by the OCC to the appropriate berth and the fire water pump shall be started. If necessary, the tanker will be towed off the berth by tugs, using the emergency tow wires. Each berth is equipped with an independent fire water system which includes a 2,000-gallon-per-minute pump and a liquid foam system. Each berth is also equipped with the following fire-fighting equipment:

(a) 2 fixed foam monitors.
(b) 2 fixed firewater monitors.
(c) 5 fire hydrants.
(d) 3 hose reels.
(e) 1 shore to ship firewater connection including 75 ft. of 2.5 in. hose.

Each berth also has the capability to be interconnected with the tugs or with fire trucks to provide increased fire-fighting capacity. The foam system is designed for coverage of fire on the berths only and is not normally interconnected for use by shipboard firefighters in the event of a fire.

Note: Regardless of any assistance the terminal may render, vessels at the berth are expected to put their own emergency procedures into effect whenever required.

Man Overboard: In the event of a man overboard from a tanker moored at the berth, rescue efforts will be implemented immediately, and the berth operator shall be advised by UHF radio. The Terminal Marine Supervisor shall also be notified by the berth operator. The standby tug and mooring boat shall be advised by the berth operator and shall get underway immediately to attempt the rescue.

Life rings will be in position around the loading berth and also on the berthing and mooring dolphins. In case of a man overboard, the medical authorities will also be alerted by the berth operator.

Oil Spills: The notification requirements for an oil spill are delineated by Federal Law. The Federal Water Pollution Control Act (FWPCA) requires persons in charge of vessels (among others) to notify the appropriate federal agency whenever an oil spill enters navigable waters or the adjoining shoreline. The appropriate agency designated to receive these reports is the U.S. Coastguard which can be contacted on Channel 16, VHF-FM.

Notification of an oil spill shall be passed by the tanker to the berth operator who in turn shall inform the Terminal Marine Supervisor.

The terminal will call other agencies that are required to be notified.

The terminal will provide any available containment and cleanup assistance for any oil spill at the terminal. The terminal will activate its oil spill response procedures upon notification of an oil spill and shall utilise all available personnel, equipment, and resources to limit and minimise pollution.

CHARTS/PUBLICATIONS: The following official charts and publications are recommended for study when planning a voyage to Valdez, Alaska and the terminal:

(a) National Ocean Survey Charts:

Chart Number Old System	New System	Title
8500	531	Gulf of Alaska – Strait of Juan de Fuca to Kodiak Island
8502	16013	Cape St. Elias to Shumagain Islands
8551	16700	Prince William Sound
8520	16709	Prince William Sound – Eastern Entrance
8519	16708	Prince William Sound – Port Fidalgo & Valdez Arm, Valdez.

(b) Nautical Chart Catalogue No. 3 – Alaska

(c) United States Coast Pilot No. 9, Cape Spencer to Beaufort Sea (1964) with current supplement.

(d) Tides Tables, West Coast, North and South America (current year).

(e) Tidal Current Tables, Pacific Coast of North America and Asia (current year).

(f) United States Coastguard Light List, Vol. III, Pacific Coast and Pacific Islands (current year).

(g) Weekly Notice to Mariners published by Defense Mapping Agency Hydrographic Center (DMAHC).

(h) Local Notice to Mariners issued by Commander, Seventeenth Coastguard District, Juneau, Alaska.

(i) Radio Navigational Aids, Pacific and Indian Oceans (Publication No. 117B), published by U.S. Hydrographic Office.

WEATHER: *Wind:* The mountains which surround Port Valdez tend to constrain the flow of air to either an Easterly or Westerly direction. At Valdez Narrows, the predominant directions are Northerly and Southerly.

Jackson Point experiences stronger winds than Valdez Airport; however, light winds (less than 13 m.p.h.) occur about 85 per cent of the time. The prevailing wind directions are S.W. from May through September and N.E. from October through April. The N.E. Winter winds reach gale force but usually do not prevail for long periods. The site is well protected from Southwesterly winds but is fully exposed to the Northeasterlies and to winds coming off Mineral Creek, directly North of the facility, approx. 2.5 miles away across Port Valdez.

The occurrence of winds with speed greater than 19 m.p.h. from any direction is less than 7 per cent throughout the year.

A wind chill factor chart is presented for use in conducting operations during Winter seasons. As indicated, combinations of low temperatures and high winds combine to provide extremely low equivalent temperatures. Outdoor operations under these conditions should be closely supervised to insure that personnel and crewmen do not suffer from exposure or frostbite.

Precipitation: Precipitation is abundant during all seasons with the majority falling during the months July through November. Valdez has an average annual precipitation of 62.37 in. with a mean total of 244.5 in. of snow per year. Greatest snowfall in a 24-hour period was 43 in. in February 1928. Precipitation of an amount in excess of 0.01 in. occurs an average of 170 days per year. Estimate 1 in. rain = 12-15 in. snow.

Temperature: The mean monthly annual temperature is 35.7° F. with recorded extremes of +87° F. (June 1953) and −28° F. (February 1947). The month of January is the coldest with a mean daily minimum of 11° F. and a mean daily maximum of 26° F. The month of July is the warmest with a mean daily minimum and maximum of 45.2° F. and 60.1° F., respectively.

Visibility: Snow or snow with fog are the major causes of reduced visibility during Winter months. At the Valdez Airport, visibilities of 1 mile or less occur 3.7 per cent of the time, annually. Visibilities greater than 5 miles occur 85 per cent of the time.

Tides: The tide at Port Valdez has a diurnal range of 12 ft. and a mean range of 9.7 ft.

Waves: The port is surrounded by mountains and is well protected from the open sea and the wave action within the port is limited to wind-generated waves which are constrained by the fetch available. The maximum calculated wave height is 9.4 ft. from the East with a period of 4.3 seconds. Waves in the order of 6 ft. could occur from the N.W. quarter. An important exception to this is a tsunami or seismically generated wave which can be far in excess of the heights quoted above. Investigations in 1968 showed mean wave heights 3 to 6 ft. in Winter (independent occurence 0.7 per cent of time) and 2 to 3 ft. in Summer (0.1 per cent of time). Berths at the terminal are designed to withstand waves of 12 ft. with a vessel alongside and 20 ft. when vacant.

Ice: Valdez is an ice-free port as far as tanker operation is concerned. Light ice forms along the banks and in the small boat harbour at Valdez, but this has not interfered with small-boat operations.

Currents: It appears that surface currents measured during calm wind conditions in Port Valdez often oscillate with the tide, moving generally in and out of the port with maximum speeds of 0.5 knot. The Easterly (flooding) surface current during a falling tide may or may not persist throughout the year. Although Volume 9 of the U.S. Coast Pilot for Alaskan waters describes the current in Port Valdez as "too weak and variable to be predicted", measurements of surface current speeds typically show maximums of 0.5 to 1.0 knot.

It is requested that inbound tankers keep the OCC advised of weather conditions in the Gulf of Alaska, Prince William Sound, Valdez Arm, and Valdez Narrows in order that accurate information may be passed to outbound tankers.

VISITORS: Access to the terminal is limited to terminal personnel, authorised governmental personnel and authorised visitors with valid reasons for entry onto the terminal site.

Visitors to the Valdez Marine Terminal are requested to make arrangements through the Administrative Office in advance of their arrival at the terminal. Authorised visitors shall be met at the main gate, which provides the only land access to the terminal and is located at the East end of the terminal site, and shall be escorted through the terminal area. All persons passing through the main gate shall sign in and out with the guard. Any visitor who arrives at the main gate outside normal working hours of the Administrative Office and who has not made prior arrangements shall be turned away and requested to contact the Administrative Office during normal working hours.

The guard at the main gate shall ask any visitor desiring to meet a tanker crewman to wait at the gate until the vessel is called and arrangements have been made to meet the visitor.

Small boats and other vessel traffic will not be permitted to dock at the terminal site without the approval of the Terminal Marine Supervisor. Only taxicabs with valid passes will be permitted to enter the terminal site, and any private or commercial vehicles that are permitted in the terminal area will be subject to inspection on entering and departing the area.

SHORE LEAVE: If tanker personnel return to the Valdez Marine Terminal site in such a condition that they might require assistance to insure their safe return to the ship, they shall remain at the main gate until the guard grants them admittance. Should an escort be required, it will be provided by terminal personnel.

All tanker personnel transiting the terminal area will be required to carry their United States Merchant Mariner's Document (USMMD) and company identification of tanker owner for identification. These documents shall be presented to the guard at the main gate whenever tanker personnel enter or leave the terminal site. Should a crewman present himself without these documents, he will be detained and the Master will be called to resolve the matter.

TIME: Alaska Standard Time (150th West meridian) for a zone description of +10(ZD=+10). Local time is modified from the last Sunday in April to the last Sunday in October by the use of Daylight Saving Time for a zone description of +9 (ZD =+9 for Alaska Daylight Saving Time). This time is 2 hours behind that in Seattle and California and 5 hours behind New York.

To avoid confusion, all communications regarding sailing times, sailing dates, arrival times, arrival dates, etc. are to be quoted in Alaska Local Time.

FRESHWATER: Only in cases of extreme emergency can potable water be supplied and in a very limited quantity.

FUEL: Not available.

POLLUTION: U.S. Federal Pollution Prevention Regulations and Federal Water Pollution Control Act to be strictly observed.

TELEPHONES: Pay telephones will be located in the vicinity of each loading berth for the use of ship's personnel.

Telephones will not be placed aboard tankships calling at the terminal.

AGENCY: Alyeska Pipeline Service Company will not act as Agent for tankers calling at the Valdez Marine Terminal. Any requirements for such services as ship chandler, etc. must be obtained through the Owner's appointed ship's Agent. For security, the Valdez Marine Terminal must be notified of the appointed Agent.

VANCOUVER, Washington: 45.36 N. 122.40 W.

DOCUMENTS: 3 copies of following:

Cargo Manifest.
Store List.
Crew Cargo List.
Crew List.

One copy of following:

Clearance from last Port.
Tonnage Tax Certificate.
Copy of Vessel register and itinerary of vessel port by port.

PILOTAGE: When entering from sea (without service of a bar Pilot) vessel or Agent must give notice between hours of 0800 and 1700 and at least 12 hours prior to ETA Astoria. Calls may be placed with Astoria office (325-4532) or at Portland office (228-9325) or by radio to "Colrip Astoriaore". River Pilots board at Astoria in channel in vicinity of Astoria Crossing Lighted Buoy No. 37. Signal for river Pilot is 1 long and 3 short whistles. When ordering bar Pilots, request radio via KLB, Seattle, Wash., about 12 hours before arrival. Address "Bar Pilots, Astoria, Ore.", giving date and time of arrival at lightship. When "Peacock" is on station Pilot boards from small power boat; when "Columbia" is on station, Pilot boards directly from "Columbia". When pilot is boarding from small boat keep engines at about 4 knots speed. Do not change course or speed until signalled by Pilot vessel. Vessels having radio telephone contact pilot vessel for instructions on following frequencies: radio phone watch on Channel 16 VHF (156.8 mgc/s) also 2182 and 2738 kc/s. Pilot boat "Peacock" call WS 7217; pilot boat "Columbia" WJ 8200; Astoria Bar Pilots' office (Channel 16) KOK 360. Also see "General-Pilotage" before first U.S.A. port (Albany).

ANCHORAGES: Only designated anchorages on U.S. Coast and Geodetic Charts are at Tongue Point (Astoria), Oreg. 2 in number and designated on Chart 6151 Columbia River, Pacific Ocean to Harrington Point, as 1 Lower Tongue Point and 2 Upper Tongue Point. Additional locations on Columbia and Willamette Rivers where safe anchorages can be made upon advice of Columbia River pilots. Anchorage in Vancouver harbour by permission of Harbour Master.

RESTRICTIONS: No restrictions on night entry. State of tide and draft restrictions not applicable to vessels drawing less than 40 ft.

MAX. SIZE: No restrictions length and breadth. Depth at Columbia River entry 48 ft. River channel to Vancouver maintained at 45 ft. by 600 ft. Seasonal tidal effect up to 3 ft. at Vancouver.

HEALTH: See "Health; All Ports" before first U.S.A. port (Albany). Illness reports made to Seattle Quarantine Station.

AGRICULTURE: "Agriculture" before first U.S.A. port (Albany).

RADIO: Route ETA cables through KBLITT Seattle, Wash.

TUGS: Normally join vessel at designated berth. Tug lines used at no charge.

BERTHING: No special requirements for berthing and no special arrival times required except under particular circumstances.

STEVEDORES: Allocation for gangs Mondays through Saturday must be confirmed at 1100 hrs. to the longshore hiring hall. Allocation for gangs Sunday and Monday are made at 1100 hrs. Saturday for both day and night gangs. Same procedure applies to allocation of night gangs, but night gangs may be cancelled by 1400 hrs. afternoon of night gangs are to work.

MEDICAL: Any type of medical treatment can be provided and hospital facilities available. Only inoculation requirement for entry to U.S. is smallpox, except when vessels have called at an area infected by another disease.

DENSITY: Fresh water at all times.

FRESH WATER: Available at all berths delivered through pier-side connections.

FUEL: Viscosity grades of B and lower. No advance notice required. Barging essential.

FIRE PRECAUTIONS: Port fire precautions respecting tankers are administered by U.S. Coast Guard, which enforces shipboard regulations under Code of Federal Regulations, Part 46, Sub-part D, Sections 20 to 40; Police Harbour Patrol, which controls port movements, boards vessels to warn Master regarding harbour regulations, including spilling of oil, etc.; and Fire Marshal, who exercises jurisdiction regarding fire regulations at shoreside facilities serving tankers.

DEVELOPMENTS: Will continue building new cargo warehouses, additions to dock facilities, 3×50-ton gantry cranes available, berths for 4 cargo vessels, container yard and lumber yard.

GANGWAY/DECK WATCHMEN: Services at option of vessel Owner/Agent and available through private firms.

OPENING/CLOSING HATCHES: While ship is at dock, opening and closing hatches is work of longshoremen. Ship may open or close own hatches while under way.

CERTIFICATES: Registered tonnage certificate.

CUSTOMS ALLOWANCE: Tobacco, reasonable quantity. Wine and/or Spirit, reasonable quantity.

CARGO GEAR: Valid cargo gear certificate required, acceptable to U.S. Bureau of Labor Standards.

IDENTIFICATION CARDS: Immigration Dept. requires forms No. 595 and No. 31 (Repatriation). Changes can be effected at any U.S. Consulate and are honoured here.

CONSULS:

Austria
Belgium
Costa Rica
Denmark
Dominican Republic
El Salvador
Finland

France
Federal Republic of Germany
Great Britain
Iceland
Italy
Japan
Lebanon

Mexico
The Netherlands
Norway
Republic of Panama
Peru
Sweden
Venezuela

REPAIRS: All types of deck and engine repairs possible.

DRY DOCKS: See "Portland, Oregon".

REPATRIATION: Any arrangements possible for crew changes or other repatriation.

AIRPORT: Airport 10 miles from town, served by 7 regularly scheduled airlines with direct service and/or connections domestically and world-wide.

TIME: GMT minus 8 hours. Daylight saving time becomes effective annually on last Sunday in April through last Saturday in October.

HOLIDAYS: Following holidays are recognised: *New Year's Day; Lincoln's Birthday (Feb. 12th); Washington's Birthday (Feb. 22nd); Memorial Day (May 30th); *Independence Day (July 4th); *Labour Day (1st Monday in September); Columbus Day (Oct. 12th); Veteran's Day (Nov. 11th); Thanksgiving Day; *Christmas Day (Dec. 25th); Statewide Election Days. Other legal holidays may be proclaimed by State or national authority. When holiday falls on Sunday, following Monday observed as holiday. Longshore work performed on any of above-listed days is at overtime, which is one-and-a-half time rate. Days marked(*) are stop-work days, viz., no ships will be worked. This also applies to July 5th, which observed locally on unilateral basis.

POLICE/AMBULANCE/FIRE: Police 693-2555; Fire 693-1441; Ambulance provided by several private firms, but can be obtained through police or fire number.

SERVICES: All services available such as compass adjusting, major or minor repairs either with work barges or at ship repair berths; lay berths available; charts available from private companies; all chandlery supplies available.

SHORE LEAVE: Crew members permitted ashore except where vessel has made first arrival from Communist-controlled port.

AUTHORITY: Port of Vancouver.

AGENT: See "Portland", Oregon.

WILMINGTON, Delaware: 39.44 N. 75.32 W.

DOCUMENTS: Handled through local Agents.

PILOTAGE: See "Philadelphia."

ANCHORAGE: At Cherry Island.

MAX. SIZE: Length unlimited, breadth unlimited, draft 35 ft. MLW tide range 5.5 ft.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Baltimore Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

RADIO: U.S. Coast Guard, Gloucester, N.J.

TUGS: Available through Wilmington Launch Service.

BERTHING: 3,260 ft. marginal wharf. 20-100 ton crane capacity. 400-600 t.p.h. bulk unloader. Covered bulk storage of 472,000 sq.ft. Dockside freezer capacity of 200,000 cu.ft. at present. Additional 100,000 cu.ft. by December, 1978.

DENSITY: Fresh water port. Normal 12 hour tides.

FRESH WATER: Hose connection from dock.

FUEL: Available.

GANGWAY/DECK WATCHMEN: Required.

OPENING/CLOSING HATCHES: Optional.

IDENTIFICATION CARDS: See "New York".

CONSULS: All Consuls are located in Philadelphia, Pa.

REPAIRS: Possible.

DRY DOCKS: Major repairs and dry dock facilities – Sun Ship Yard, Chester, Pa.

REPATRIATION: Facilities are available and arranged by Agent.

AIRPORT: Philadelphia International Airport, regular service.

TIME: U.S. Eastern Standard and Daylight Time.

POLICE/AMBULANCE/FIRE: Police, Ambulance, Fire, tel. 302-654-5151.

TELEPHONES: Dock-side pay phones.

SERVICES: All services available.

SHORE LEAVE: Allowed unless restricted by Immigration.

AUTHORITY: Port of Wilmington.

WILMINGTON, N. Carolina: 34.14 N. 77.57 W.
(See Plan Book)

PORT LIMITS: A ship is considered an "arrived vessel" upon arrival at Buoy 2CF.

DOCUMENTS:

3 copies Cargo Manifest (Forms 7527-A or 7527-B), the original showing all cargo on board, and 2 copies showing only cargo for this port.
3 copies Crew Manifest (curio list) (Customs Form 1304).
3 copies Stores List (Customs Form 1303).
3 copies Passenger List (Form I.418).
3 copies Crew List (Form. I.418).

Customs boarding Officer will also examine ship's Register and Load-line Certificate. In addition, the following documents will be required for formal entry to be made within 48 hours of arrival from abroad, or 24 hours from arrival from a United States port:

Master's oath (Customs Form 1300).
All foreign clearances.
U.S. Certificates of payment of tonnage tax (Customs Form 1002).
Certified Crew List.
Oil Pollution Cert.
General Declaration (Customs Form 1301).
Load Line Certificate.
Safety Equipment Certificate.

PILOTAGE: Pilots board vessels at Buoy 2CF off the mouth of the Cape Fear River. Masters should notify local Agents by radio of their ETA's at Buoy 2CF in order that the Pilots may be on station in advance of arrival. Additionally, Masters may communicate with Pilots by radio telephone on 2738 frequency and by VHF Channel 18A. Pilots remain on board until harbour limits of Wilmington, where docking masters normally board vessels for purposes of docking.

APPROACHES: The port terminal at Wilmington is located on the East bank of Cape Fear River, approximately 26 miles from the sea buoy at the mouth of the river. Wilmington is 150 miles S.W. of Cape Hattaras and 26 miles North of Cape Fear.

RESTRICTIONS: The approach channel and basins adjacent to the port are maintained at a depth of 38 ft. MLW.

ANCHORAGE: Vessels awaiting Pilots normally anchor in area off Buoy 2CF. There is no safe anchorage in the port of Wilmington for large vessels to be accommodated. Small vessels can be accommodated for brief periods in anchorage basin, although it is necessary to swing with the tide in order to avoid blocking channel.

MAX. SIZE: No limits on length, breadth, and draft limit is present channel project depth of 38 ft. Master should communicate with local Agent regarding stage of tide for passage of vessels drawing 34 ft. or above.

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Fort Monroe Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

TUGS: 2 towing companies operate at Wilmington.

BERTHING: A continuous marginal wharf, 6,000 ft. long. Docking at any hour, day and night.

SPECIALISED CARGO HANDLING FACILITIES. State Port Terminal: fully equipped to serve cellular type container ships, for bulk handling; equipped with 6 yard rehandler buckets, receiving hoppers, and paved open storage areas, 2×45-ton, 1×115-ton and 1×225-ton gantry crane; 1 berth with tank farm for handling liquid chemicals.

Almont Shipping Company: 3 berths, open and covered bulk storage, 2×25-ton cranes and 1×85-ton derrick. No facilities for LPG carriers.

TANKERS: 10 tanker berths with drafts from 30 to 40 ft. MLW. Night berthing at all berths. Fresh water available.

FRESH WATER: Available from shore connections at rates up to 50 t.p.h.

FUEL: Bunker "C" and diesel fuels available locally.

FIRE PRECAUTIONS: Normal precautions observed.

DEVELOPMENTS: 1×225-ton gantry crane, 9 additional acres paved open storage and dockside sewage facilities to receive waste from ships available.

REPAIRS: Minor ship repairs available.

DRY DOCKS: 1×1,000-ton lift floating dry dock.

AIRPORT: New Hanover Country Airport, 7 miles from N.C. State Port Terminal. Served by Piedmont Airlines.

IDENTIFICATION CARDS: Standard U.S. Immigration Forms I.95 to be made up for each crew member on arrival. Not necessary for crew man already holding Form. I.95, issued for the same vessel.

TIME: Eastern Standard Time, GMT minus 5 hours. Daylight Saving Time, GMT minus 4 hours from April to October.

AUTHORITY: North Carolina State Port Authority.

WRANGELL, Alaska: 56.28 N. 132.22 W.

Located on Wrangell Island. Open all year.

DOCUMENTS: See "Anchorage, Alaska".

PILOTAGE: (From sea via Dixon Entrance up Clarence Strait to Guard Island.) Under pilotage from Guard Island.

ANCHORAGE: Good anchorage N.E. of Woronofski Island in 22 fathoms of water.

MAX. SIZE: Harbour depth 32 ft. MLLW. Tides: mean range 13.7 ft., diurnal range 16.1 ft. Also see "Berthing".

HEALTH: See "Health: All Ports" before first U.S.A. port (Albany). Illness reports made to Anchorage Quarantine Station.

AGRICULTURE: See "Agriculture" before first U.S.A. port (Albany).

CUSTOMS: Immigration, Guard Island or local Customs office. Quarantine and Customs, local.

BERTHING: 3 wharves. 1. Wrangell Wharf Co. Berthing length 220 ft., East end depth 24 ft., West end depth 38 ft. 2 lift-trucks; 4,800 sq.ft. covered shed space.

2. Wrangell Lumber Co. Dock; Berthing length 320 ft., 150 ft. wide, depth South end 32 ft. North end 40 ft. LW. Height of pier from zero tide 23.5 ft. Crane – 1 mobile, 8 ton, 6 lift-trucks. No shed space. 3 acres open storage.

3. Alaska Wood Products: Berthing length 300 ft., 50 ft. wide. Depth at LW 32 ft. Height of pier from zero tide 23 ft. No shed space.

TUGS: 3 available, 500 h.p. each.

DEVELOPMENTS: Possible mineral potential for future development from Iskut River and Stikine River lodes.

STEVEDORES: 4 gangs available.

REPAIRS: None.

WATER: Available.

FUEL: None.

MEDICAL: Small but new hospital.

TRANSPORTATION: Air and ferry.

NOTES

Please also advise Shipping Guides Ltd.

67

Uruguay

REGULATIONS: Increased fines became effective in June 1973 in respect of infringements of the Uruguayan Marine Code. There are approximately 119 Articles to the Marine Code, and Owners and Masters of vessels proceeding to Uruguayan ports are recommended to obtain a copy of the Code (which lists port regulations and amounts of fines for infringements) prior to arrival. We understand that copies of the Code, entitled "Reglamento Preventivo y Represivo de Infracciones Maritimas, Fluviales y Portuarias" may be obtained from Centro Navegacion Transatlantica, Colon 1486 p. 3, Montevideo.

Freely translated, we give below some extracts of Port Regulations as specifically applicable to Montevideo, but also to all Uruguayan ports in general:

Articles 1 to 8 cover respectively the reasons for setting up this preventive set of regulations; the definition of what a vessel is in terms of the legislation; the establishment and amount of fines (they may be tripled in the event of repeated offences); the fact that very small vessels may only have imposed 10 per cent of the full fine; the jurisdiction for the regulations covering the whole of the Uruguayan coast and river frontage; the stipulation whereby the General Marine Prefecture must send to the Captain of the vessel a statement of the offence immediately it is observed and this in triplicate and to the local Agent for the vessel.

The actual information which the form must contain is delineated. Notification of offences can be made after a vessel has sailed, this being to the local ship's Agent by phone and confirmed within 24 hours in writing. All Captains must give written consent to their local Agent, and the Agent must accept this in writing, empowering the Agent to act in the Captain's name in all cases of fine payment. The Authorities may delay the sailing of a vessel if they see fit in connection with any offence. Finally, article 8 deals with the right to appeal to the General Marine Prefecture against any fine imposed, this having to be done within 10 days dating from the day following personal notification of the offence.

Articles 9 to 119 cover the specific offences subject to fine and indicate individually the full fine imposable in local pesos.

An abridged summary of each of the articles is as follows: No anchoring within 900 metres of the illuminated buoy in the port access channel.

Vessels carrying hazardous cargo must hoist flags according to the Int. Code of Signals.

Vessels with anyone on board with contagious diseases must hoist appropriate flag (letters QL).

Flag Q must be hoisted and maintained in position until health authority has given free pratique.

All vessels anchoring in the roads, bay or ante-port must take due precautions not to harm or cause damage to other vessels; the fine will be imposed notwithstanding claims for damages from third parties.

Agents of vessels which may wish to anchor in the roads must obtain prior permission from the Marine Authority, specifying vessel's measurements and the reason. If authorised, the anchorage to be used will be notified.

No anchoring at the docks unless justified, and anchors must be raised immediately the reason for dropping them has gone. There must be no delay on the part of vessels in complying with the Marine Authorities instructions to change berth or anchorage.

No tying up to other vessels without Marine Authority permission; no attachment to berths which have not been allocated and no changing of berth without authorisation.

No anchoring in places not authorised by the Marine Authority, the maximum fine being applied should this have caused damage to third parties.

No small craft to be tied up obstructing gangway or quays. Where this is necessary for embarking crew members, passengers, provisions, etc., the small craft must be removed immediately the operation has been completed.

Small craft must not be tied up to buoys or beacons. Vessels must not tie up at buoys or beacons.

Maximum speed of vessels in docks is 4 knots.

Navigation in channels of access to ports is governed as follows:
Maximum speed 8 knots.

Vessels must always keep to starboard.

Vessels must not overtake each other, but where this is necessary they must conform to the International Signal Code.

No anchorage in channels.

No fishing in channels.

Vessels navigating in channels must keep a distance of 1,000 metres from each other.

Vessels must not cross in front of each other in the fore-ports.

All vessels entering or leaving the ante-port or docks, changing berths or anchorages must be assisted by a Pilot and tug, unless specifically given exception to this rule by the Marine Authority.

No vessel must enter port with damage to hull, machinery or rudder unless prior inspected by the Technical Commission of the Mercantile Marine Directorate.

Any vessel springing a leak whilst navigating in the access channel, and which the bilge pumps cannot overcome, must go aground as quickly as possible off the channel so as to leave the channel open.

In case of fire on board whilst navigating in the access channel, Captains must observe usual procedure and give signals accordingly.

The strict use of semaphore signals within port must be observed.

When vessels enter the docks or remain in them, Captains, owners or Agents must request permission from the Marine Traffic Office, and report to the Office of Pilotage, and proceed in whatever form they may instruct. On leaving the same procedure must be followed.

Captains and owners of vessels must see that their vessels do not obstruct or cause harm to port works, beacons, buoys, or semaphores and once tied up they must not slacken ropes without permission of the Marine Authority except under conditions covered by items 1, 2 and 3 of article 64 of the Port of Montevideo Marine Regulations.

No vessel to have badly stowed cargo, excess weight, or evidence of lists due to bad trim of cargo.

Only those lines necessary for tying up to be used. When two or more vessels tie up alongside to load or discharge they are all obligated to ensure that the handling of their respective cargoes does not prejudice the working of the others.

Vessels must take proper precautions when loading or discharging raw material, i.e. sand, bones, ash, coal, etc., by placing suitable planks of wood close together to prevent any such material falling into the water.

No vessel to enter docks with the gangway already rigged.

During unloading operations, no goods to be thrown on to the quay. This must be done manually or mechanically.

During discharge operations, cargo must be so positioned on the quay as to leave adequate passage for vehicular traffic, i.e. police, fire-brigade, health authorities, customs and port officials.

Planks of wood — when planks are used for any operation, they must not be placed in contact with mooring bitts or cables. When work ceases all pieces of wood, ladders, small trucks, etc, must be removed from quay, and those belonging to the ship must be taken on board, this so as not to obstruct the public path along the quay.

When cleaning or washing ships tied up at quays, no rubbish, water or cleaning material must be allowed to fall on the quay.

A very serious offence is the throwing into the water of any rubbish, sewage or other material susceptible to dirtying the water.

Very serious offences are the lightening of ships carrying petrol, crude oil, or the like, likewise the washing-out of tanks, except in authorised zones. The fine is based on the area spoiled by the wrongful discharge.

All ships should have local Agents, otherwise in the case of offences the Captain is held responsible and vessels may be detained.

Vessels are responsible to ensure that no damage is made to quay installations by the cargo they load or discharge, and must always leave berths in a tidy and clean state.

Vessels' auxiliary small craft, launches and the like must not hang over the side of the vessel in port, except during operations of launching and reshipping on board, where such operations are conducted at points indicated by the Marine Authority. Such small craft may only be used for the purpose and at the times authorised by the Marine Authority.

Usual regulations concerning carriage of passengers in vessels and heavy fines are imposable for the carriage of passengers or crew members not listed.

Vessels exceeding their navigation limits shown in their Certificate of Navigability are subject to fine.

All vessels must be cleared to sail by the Marine Authority.

Vessels must use their proper name and this must be painted on in letters of minimum of 15 centimetres height and 8 centimetres wide. Letters must be white on black or black on light colour.

Captains, Owners and Agents must report any crew offence or irregularity on board to the Marine Authority.

Vessels in port must hoist the Uruguayan flag. *N.B. It is recommended that Masters correctly establish the proscribed times for raising and lowering the Uruguayan flag, in order to avoid fines.*

Vessels must have their gangway equipped with handrails, and the gangway must be clearly lit at night.

All lines to shore must have rat-guards fitted.

When there are hazardous goods on board or when such goods are being worked, the vessel must hoist the International Signal Code letter B, and at night show a red light on the bow masthead, must always have engines in a state of readiness in case of danger, keep two-thirds of the crew on board, keep watchmen and firemen available (the number of whom will be determined by the number of holds containing the hazardous material), must only work with incandescent lights, and keep a port pilot on board if the Marine Authority so directs.

Vessels moored at quays must not move propellors, except under the direction of the Marine Authority.

Vessels must not moor in the port access channel. There must be no improper use of the International Signal Code. Signal flags must not be interspersed with flags of nationality.

If a vessel wishes to dress flags over all, or fly a flag at halfmast due to a bereavement on board, the Marine Authority's permission must be first obtained.

The use of whistles, sirens or any other audible signal within the area of the roads, bay, ante-port or docks, for any reason other than justifiable for navigation is prohibited.

Any vessel anchored, tied up to other vessels or to the shore or quays, must show a white light from sunset to sunrise which can be seen at a distance of 500 metres.

In the access channel to Montevideo, no more than 4 vessels may navigate at one time — 2 entering, 2 leaving.

Maximum speed in the Montevideo ante-port is 6 knots. There must be no anchoring in the Free Zone, reserved for the manoeuvring of vessels entering and leaving.

At Montevideo there must be no anchoring along the route leading from the Free Zone to channel "A", between the quay and the pier of the same letter. Also on the route leading from pier "A" along a line to 100 metres to the North of the end of the West Jetty.

No anchoring in any area less than 200 metres from pier "A" in a semi-circular coverage, taking as middle point a position half way between quay "A" and pier "A".

All vessels must keep to the right or to the middle when there are no other vessels in the vicinity.

International Regulations for the Prevention of Collisions apply, plus the following:

Vessels navigating along the routes established in the anteport or which have to pass directly through the passage between jetties "A" and "B", must keep to the right when another vessel is coming in the opposite direction.

Vessels which have to cross the North, the South route or directly between jetties "A" and "B", must ensure that they pass any other vessel at a distance not less than 50 metres.

Any vessel navigating under her own power must give way to a vessel under tow by a tug.

Vessels with tugs following routes which cross one another, thereby creating a collision risk, the one passing to the starboard of the other is the vessel which must take the precautionary measures to avoid collision. If, however, the risk persists, the vessel passing to port of the other must also take measures to increase the distance between the two vessels.

No vessels to pass in pairs or in opposite direction between jetties "A" and "B"; the semaphore signals transmitted by quay "A" must be observed. If the signal is "vessel entering from the ante-port to the docks", the vessel in the docks, ready to sail, must wait until the incoming vessel has entered.

If the signal is "vessel leaving the docks for the ante-port" the vessel in the foreport, moving towards jetty "A" to enter the docks, must wait in the free zone, stop engines, keeping to the right, and drop anchor if necessary, until the outgoing vessel is outside and well clear of jetty "A".

The same regulation applies to vessels leaving the River Dock. In this case, the vessel leaving to jetty "A" has priority, coming from docks I and II the first will wait for the second before starting engines.

All vessels navigating in the same direction in the ante-port must keep a distance of not less than 300 metres from each other stern to bow. They must not pass each other or navigate in pairs.

In the event of offences being incurred whilst an Uruguayan pilot is on board, at the request of the local ship's Agent, the Marine Authority will determine whether the Pilot is responsible for the offence having occurred, and take measures accordingly.

Vessels which load beyond the appropriate load line will be subject to a fine of 1,000,000 pesos.

DOCUMENTS:

1. Required by Vessel

For Customs:

Visaed Manifest and Bills of Lading – see below.
1 Visaed copy of ballast certificate from each port of origin.
1 Visaed negative cargo certificate from each port of call; if there is no Uruguayan Consulate at any of the ports the negative cargo certificate must be visaed at the next port of call where there is a Uruguayan Consul.
2 Copies of Store List covering Deck, Engine and Cabin Stores.
2 Lists of Personal crew effects.
2 Lists detailing total available stocks on board of cigars, cigarettes, tobacco and all spirits.

Note: All these lists must be made out in triplicate, original and duplicate to be handed to Customs and triplicate to be kept on board for reference purposes. Store List covering Engine Room stores must include total quantity of bunkers on arrival – *this is most important.*

1 Copy of list of passengers finally disembarking at Montevideo (or negative). Passengers' Baggage declaration forms, signed by each passenger.

For Port Health Officer

1 International Health Declaration, signed by Master and Doctor, if aboard. This is the first document requested by the Receiving Commission, and must be ready for delivery immediately the authorities come on board.
1 Copy of list of passengers finally disembarking at Montevideo.
1 Copy of crew list.
Consular clearances – see note.
Deratting Certificate to be at hand if required.
Vaccination Certificates to be laid out in order of Crew List.

For Immigration Officials:

2 Copies of list of passengers finally disembarking at Montevideo (or negative list).
1 Copy of crew list.
2 Copies of transit list of passengers.

For Police Authorities:

2 Copies of list of passengers finally disembarking at Montevideo
1 Copy of crew list.
2 Copies of transit list of passengers.

For Port Captaincy (Prefectura):

2 Copies of list of passengers finally disembarking at Montevideo
1 Copy of crew list.
2 Copies of transit list of passengers.
1 Visaed copy of passenger list from port of origin and 2 copies (not visaed).
1 Visaed copy of crew list from port of origin and 1 copy (not visaed).
1 Visaed passenger list or negative list from all ports of call.
1 Visaed crew list from every port of call in which there have been changes in crew.

For Agents:

2 Copies of list of passengers finally disembarking at the port.
2 Copies of transit list of passengers.
2 Copies of crew list.
2 Copies of all Stores Lists.
2 Copies of all Manifests and Bills of Lading, including, Manifests of all inflammables or dangerous cargoes in transit.
2 Copies of Stowage Plans and/or Hatch Lists.

Other Documents

Masters must also have at hand all the usual certificates, such as Freeboard, Classification, Measurement, Safety Equipment, Radio, Fumigation, or certificate of exemption (valid for six months only).

All persons on board must have their smallpox vaccination certificates, while vessels proceeding from recognised endemic or epidemic Cholera or Yellow Fever zones must also have the necessary certificates, or Inoculation or Vaccination. All these certificates will be examined by the Boarding Commission before pratique is confirmed.

In resume, the following number of various documents are needed, plus extra copies where possible:

Crew List: 6 plus 1 visaed form from each port where changes are made.
Passenger List for the port: 10, plus 1 visaed list from port of origin and from each port of call with new passengers.
Store Lists: 5. Separately for Deck Engine and Cabin Stores. Engine List to include Declaration of Bunkers and Luboils.
Health Declaration: 1.
Baggage Declaration: 1 for each passenger.
Manifest and Bill of Lading: 1 visaed, alternatively Ballast certificate or Negative plus sufficient copies for Agents as per individual needs.

Consular Clearances and Manifest etc. – Great importance is attached to these documents. Consular clearances must cover all ports declared in the Health form by the Master, irrespective of whether the ship has cargo or passengers for Uruguay from those ports. These documents must be carefully checked prior to arrival to make sure that the Health form only shows those ports with clearances and/or cargo or passengers for the Country.

A vessel receiving orders en route to call at Montevideo, if not previously contemplated, must take out Consular Clearances at that port and take care with the declarations.

Vessels arriving from Buenos Aires, with no cargo or passengers from previous ports of call for Uruguay, can declare Buenos Aires only on this form.

At first port of sailing, the crew list is legalised by the Consul, and any subsequent changes must be legalised at the port where the change takes place, or if not at the next port of call where there is a Consul.

The Consuls at first and subsequent ports will send, care of the Master, envelopes addressed to the Direccion General de Aduanas (Custom House) and to the Prefecto del Puerto de Montevideo. The former will contain the legalised manifest and stamped Bill of Lading, or a negative manifest, and the latter a Consular Passenger List or a legalised Negative passenger declaration. Such envelopes must be produced for each port as declared by the Master.

A vessel arriving direct from a port or series of ports where there is no Uruguayan Consul will pay the dues on arrival, but without fine.

The fine for non compliance with these regulations is heavy.

2. Required by Passengers

Valid Passport – With or without visa, see below.

Vaccination Certificate – International form against smallpox.

Tourists – Citizens of the following countries can enter as Tourists for 90 days without visa:

Austria
Belgium
Bolivia
Canada
Colombia
Costa Rica
Chile
Denmark
Rep. Dominica
Greece
Great Britain
W. Germany
Guatemala
Haiti
Holland
Honduras
Hong Kong
Ireland
Italy
Mexico
Nicaragua
Norway
Panama
Peru
El Salvador
Spain
Sweden
Switzerland
United States

while citizens of these countries require visas:

Australia
Egypt (ARE)
Hungary
India
Japan
Lebanon
Netherlands Antilles
Portugal
Syria
South African Republic
Thailand
Turkey
Yugoslavia

Citizens of Argentina, Brazil and Paraguay can enter with their own police identity cards.

Tourists in transit, without a visa, are permitted from all countries, provided they have a confirmed outbound passage, and with the exception of European Communist countries.

Consular Visas are valid for 1 year.

Passengers intending to reside in Uruguay must complete all formalities in the respective Consulate before embarking.

3. Store Lists

Separate list for Deck, Engine and Cabin stores must be prepared before arrival, and be ready in triplicate for the authorities with extra copies for the Agents, whose intervention is later needed in any ordering of further stores or in case of difficulties.

The same forms as in use in Buenos Aires are accepted, and the same regulations as to weights in kilos or measures in litres, etc., rule. There are some points of difference, however.

Full quantity of bunkers must be declared. A separate list must also be made, detailing ship's store of cigarettes, cigars, tobacco and liqueurs.

This refers to the maximum quantities which it is permitted to purchase in Montevideo for ship's stores of these particular items, as the final permit for such shipments will be subject to the list of cigarettes, spirits and liqueurs on board on arrival.

According to the latest decree, vessels of over 1,000 tons gross will have the right to purchase, ex bond, 1 litre bottle per person on board for each 6 days of voyage, with a maximum of 40 cases of 12 litre bottles. In cigarettes, the allotment is 1 packet of 20 per person per day of voyage, with a maximum of 20,000 such packets.

Agents must be informed of any orders placed for Bonded stores since their signature is required on the documents.

Bonded lockers are sealed by Customs on arrival, and any bonded stores purchased in Uruguay must not be opened or used whilst in port.

PILOTAGE: Also see "Montevideo" Pilotage section for Port Control in the River Plate. Pilotage is compulsory in all river and port zones, except for vessels coming from the East to ports between La Paloma and Montevideo Roads, or entering Montevideo Roads for no commercial reason. All coastal vessels either Uruguayan or foreign are also exempt.

Pilotage Zones.

(1) RIVER PLATE – Comprises zone between imaginary Lines in the East from Punta del Este (Uruguay) and Punta Rasa, on Cape San Antonio (Argentina) and on the West between Colonia and San Isidro (Argentina).

(2) RIVER URUGUAY – From 56.5 km. of Farallon Channel to Uruguayan ports on the River Uruguay.

(3) PORTS – Pilotage zones, comprises limits of each port including its Roads.

In the River Plate, Pilots presently board to the South of the wreck of the *Calpean Star*, approximately 4.5 km. South and lying 70 m. West of the dredged access channel.

Several of the pairs of buoys are missing, and only the mid channel buoy indicating the entrance to the access channel, 5 miles South from the port, and the 2 pairs nearest to the breakwaters are operating.

When taking tankers, the port Pilot usually goes out to the 5-mile mark.

There is no more than 30 ft. in the access channel at the moment; dredging is being carried on, but there are only 2 dredgers operating between the channel and the port of Montevideo itself.

The current is across the channel, running at about 1 knot, and changes direction more with the wind than the tide.

Vessels awaiting Pilot should anchor on the West of the channel and South of the *Calpean Star;* there is 24 ft. up to 500 m. West of the channel. The zone to the East of the access channel has submarine cables and must therefore be avoided.

Pilots are ordered through the Agent, and have an up to date communications system installed in their office on the 21st floor of a modern skyscraper, whence they dominate a large area of the estuary.

Permanent watch is kept on Channel 16 VHF, and operator speaks English. It is possible to call "Practicos Montevideo" and ask to be connected by phone to the vessel's Agent's office for last minute instructions, etc.

Channel	Frequency	Channel	Frequency
9	154.50	11	155.50
16	158.00		

The port is closed when wind force exceeds 43 knots or, at night, 37 knots, or if visibility is less than 1 kilometre, but otherwise vessels can enter or sail at any time.

There is also a Telex machine with 24 hour watch, over which messages can be transmitted to Agents out of office hours, over a weekend, for example. Call sign is DGT 843 Pilot CX. This is particularly useful for vessels sailing late from Buenos Aires, and the Office will pass on the message to the corresponding Agency by phone.

All Pilots carry a "walkie-talkie" and can communicate either with their office, the Port Authority or the Semaphore station, using Channel 9 for the port offices and 11 for the Pilot's office, 16 being kept for use with vessels.

Ordering of River Pilots for sailings from Uruguayan River Ports – Although Masters can apply directly for Pilots such applications must be made by telegram addressed to the Practico Mayor Montevideo, it is preferable for them to keep their Montevideo Agent fully informed and leave the latter to order the Pilot.

The opportunity of ordering Pilots at any hour having been discontinued makes it more essential than ever that Montevideo Agents are kept accurately informed regarding expected readiness to sail. Failure to do so will result in unnecessary demurrage being paid to Pilots or delay to the ship concerned.

Pilots for vessels proceeding from sea to a Uruguayan Port on the River Uruguay – A Uruguayan Pilot must be employed to conduct ships from sea to a Uruguayan Port on the River Uruguay.

Vessels must call at Montevideo Roads to embark Pilot and pay the cost of tug to take out Pilot. They can also, alternatively, take an Argentine Pilot at Recalada who will take the vessel to Intersection, where in either case an Argentine river pilot will board to take the vessel to the Roads of port of destination, where a Uruguayan Port pilot will come aboard, this being a simpler procedure and all handled by Agents in Buenos Aires (one radio advice).

Vessels from an Argentine Port bound for Uruguayan River Port – Such vessels are normally taken to immediately off port of destination by an Argentine Pilot, but they must be berthed by a Uruguayan Pilot who has to be sent from Montevideo, thus Montevideo Agents must be kept promptly informed of vessel's position to enable them to order a Pilot to berth ship without delay.

Vessels leaving Uruguayan Port for Argentine Ports on the River Parana – Uruguayan River Pilot supplied from Montevideo must be employed for unberthing, and this Pilot takes vessel to the Bravo Channel off Nueva Palmira, where the Argentine River Parana Pilot, who is normally already aboard, takes over.

The Uruguayan Pilot is paid in accordance with tariff to Nueva Palmira plus an unberthing fee and travelling expenses.

HEALTH: In order to be able to enter port and berth without delay, the Authorities accept a radio, cable or telex request, couched in the following terms (messages must be sent in Spanish).

Vessels arriving from elsewhere

Capitan .... solicita libre platica
here the name of the vessel
informando proceder de Buenos Aires, siendo su escala anterior
....
here a port in another previous country which could be Santos, Valparaiso, Capetown, etc.
condicion sanitaria buena..Capitan
here the name of the Master

Vessels arriving from Buenos Aires

Capitan ....solicita libres platica
here the name of the vessel
informando proceder de.............here a port of origin, say London – Liverpool – San Francisco – Rijeka – Kotka – Tokyo – Oslo, etc.
siendo su ultimo puerto..............here say Santos – Valparaiso – Capetown, etc.
condicion sanitaria buena..Capitan
here the name of the Master

There have been cases of delay in delivery of radio messages, even though passed on by phone, but the original message must accompany Agent's request for free pratique, hence it is advisable to use cable or telex services if possible. Messages must be sent at least 24 hours ahead, and changes in ETA advised.

Although it is possible to take pratique in Uruguayan River ports, there is frequently delay there, and since vessels must enter Montevideo to pick up the river port pilot also, it is advisable in these cases to ask for pratique at Montevideo as above, and the order from Sanitary Authorities granting Free Pratique will be handed to the Pilot to take on board with him.

In no case, however, does the granting of pratique by radio modify the inspection in port, where the usual commission must be the first to go on board.

Illness on board – Any private doctor attending a patient on board must immediately inform the Sanitary Inspector should the disease be contagious.

No patient can be landed without the consent of the doctor of the Health Department with the exception of accident cases that require immediate medical attention, and even in those cases the Health department Doctor must be informed in order to issue a Sanitary Pass for the Hospital where the man was taken to.

If a Captain does not report the existence of illness on board he is liable to fines which are double if patients land without the consent of the Sanitary Authorities.

RADIO:

Notice to Mariners

Official Uruguayan Notices to Mariners are transmitted in Spanish only preceded by the signal TTT, the number of the Notice, letter R, then contents and are repeated for 15 days. Should there be no Notices to transmit, the wording "no hay avisos para navegantes" will be radioed.

Punta Carreta CWF 2768.5 kc/s. A 3 0.4 kW. at 00.03, 14.03 and 19.03 hrs. (after the weather forecast).

Cerrito CWA on 4346, 8602, 12750, 17208.8 A1, 1.5 kW., also on 421.5 kc/s. A1 and A2 5 kW. at 00.00, 14.00 and 19.00 hrs. (after the weather forecast).

Montevideo CX 16850 kc/s. A3 10 kW. at 13.02 and 16.02 hrs. on working days, at 17.00 hrs. on Sundays.

Montevideo	CX 6	659 kc/s.	A3 2.5 kW.
	CX 26	1050	A3 all transmit Notices to Mariners at 16.00.
	CX 38	1290	A3 5 kW.
	CXA 4	6125	A3 10 kW.
	CXA 6	9620	A3 20 kW.
	CXA 10	11900	A3 20 kW.

Weather Forecast

A weather forecast is transmitted in Spanish to cover 3 zones.

Reference AAA 830 is the Coastal area from 30° S. 50 W. out to 30° S. 46 W. and down to 33° 30' S. 53° W. and 35° S. 49° W.

AAA 860, River Plate zone from 33° 30' S. 57° W. to 35° S. 49° W. and down to 35° 30' S. 57° W. to 39° S. 53° W.

AAA 870 Coast of Argentina from 35° 30' S. 57° W. to 39° S. 53° W. and down to 41° S. 62° W.

Details of all 3 zones are transmitted as follows, valid for 24 hours.

CWA on 421.5 A1 5 kW. at 00.00, 14.00 and 19.00 hrs.

CWF on 2768.5 A3 0.4 kW. at 00.05, 14.05 and 19.05 hrs. and in A1 over 4346 kcW. 8602 kc/s., 12750 kc/s. and 17208 kc/s.

Time Signals

Are transmitted from 2 stations in Montevideo at 15.00 and 20.00 hrs. The hour is indicated by 6 dots preceded by a ten second dash and a 5 second silence. The last dot indicates the hour.

CX 6 on 650 kc/s. A3 25 kW.
CXA 6 9620 kc/s. A3 20 kW.

Standard time is GMT less 3 hours.

Direction Finding

There are 2 radio beacons specially for maritime navigation. Both operating on circular sweep from the lighthouses at Cape Polonio and Isla de Lobos.

Cape Polonio at 34° 24′ 00″ S. and 53° 47′ 45″ W. frequency 295 kc/s. A2 range 380 miles, and 500 kc/s. A1 A2.

The signal is P repeated 3 times in 10 seconds followed by 18 dashes in 30 seconds, repeat P 3 times and 10 seconds silence total period 1 minute. This is repeated 4 times after 5 minutes silence, total 10 minutes.

In good weather transmission must be requested from CWM 21 on 500 kc/s. A1 A2. In fog, there is continuous transmission from the hour.

Isla de Lobos 35° 01′ 33″ S. 54° 53′ 17″ W. frequency 300 kc/s. A2 range 380 miles. The signal L is repeated 3 times in 10 seconds, followed by 18 dashes in 30 seconds, repeat L three times, silence 10 seconds. Total period 1 minute, repeated 4 times, then 5 minutes silence total period 10 minutes.

In good weather this transmission must be requested from CWM 26 on 500 kc/s. A1 and A2.

In fog transmission is continuous from 05 minutes in each hour.

There are also the following airbeacons which can be used.

		S.	W.	kc/s.	
Colonia	COL	34° 27′ 33″	57° 45′ 49″	203	A 2 0.075 kW. cont.
Montevideo	CAR	34° 46′ 15″	56° 01′ 28″	380	A 2 0.05 kW. cont.
	CRO	34° 48′ 55″	56° 01′ 45″	305	A 2 0.05 kW. cont.
	CRR	34° 49′ 50″	56° 00′ 15″	280	A 2 0.05 kW. cont.
Gral. Artigas	GA	34° 45′ 00″	55° 58′ 00″	260	A 2 0.05 kW. cont.
Punta del Este	CB	34° 55′ 00″	54° 55′ 00″	325	A 2 occasional only.

GENERAL INFORMATION:

River Uruguay

Rises in Brazil, and later separates Argentina and Uruguay. Its right bank is generally low, wooded and swampy, the left bank high and hilly. Preparatory work has commenced on a large hydroelectric dam to be built at 332 km., above Concordia, which will take some years but will contribute to a regularisation of the river, which at present rises and falls twice every year, with the varying rainfall seasons in its basin, so that approximately half the year the water is low, usually from January to April and again in August. However, the wind also affects the depth of the water as in the River Plate, so that any seasonal forecast is impossible. A safe year round draft to Concepcion del Uruguay can be taken at 20 ft. 6 in., though vessels from time to time load to 22 ft. 6 in.

The Ministry of Marine publishes fortnightly a bulletin with all information on depths of water in the channels, as well as of changes in buoys, lights, etc.

Two new bridges communicating with Argentina now span the Uruguay river at Fray Bentos and Paysandu. The bridge at Fray Bentos has a clearance of 36 m. over zero, and a main span of 220 m.

CARGO

Movement of Cargo

Once stevedores have come aboard, no cargo, either for the port or in transit, may be handled by the crew, as otherwise the vessel will be called on for high extra wages to stevedores. This also affects the lashing of transit cargo on deck.

Stevedores will not work in the rain, except when loading meat, earning double wages while doing so. They can also be persuaded to handle baggage or mail.

When handling dusty cargo in general, or which gives off ammoniacal, nicotine, or organic emanations, masks must be provided for stevedores' use.

Overcarried Cargo

Cargo for Montevideo is often overcarried to Buenos Aires with the consequent delays in delivery and expenses for the vessel. Holds should be carefully inspected as soon as discharge is said to have been finished to avoid possible overcarrying.

Clean Receipt

Agents will advise if they wish to receive any cargo for which a clean receipt cannot clearly be given, otherwise the cargo should be rejected. Mate's receipts cannot be claused to cover any damage from rain, wetting or other causes which might be sustained after the cargo is received on ship's tackle.

Bulk cargoes falling or drifting into water or on dock

When handling bulk cargoes vessels must place between the vessel and the dock side a wooden scaffolding, with lateral boards, or strong canvas to collect all material which is liable to fall into the water or on to the Dock during handling. There is a heavy fine for non-compliance.

This should be remembered when writing charter parties, especially under FIO conditions, as this should be for account of shippers or receivers.

Delivery of cargo from vessels

The cargo is discharged direct to Fiscal Warehouses, to lorries, lighters or wagons. When the cargo is delivered to Fiscal Warehouses, receipt for this is given to the vessel's agents by the Custom House official in charge of the Warehouse. If discharged to lighters the lighterman obtains receipt from the Custom House official once the cargo is received in warehouse. When the cargo is delivered direct to Consignees' lorries, the receipt is given by special Custom House officials called "Cargo Receivers".

The goods are delivered by the Custom House officials to the Consignees against the presentation of the "transferencia" (transfer ticket) signed by the Agents of the vessel. The Agents sign the "transferencia" extended on stamped paper, against the Original Bill of Lading, which must be legalised by the Uruguayan Consul at the port of loading.

The steamship Agents must keep a special register of all "transferencias", and are responsible to the Authorities for keeping this register. Agents must retain Original Bill of Lading for cargo discharged, as it must be shown to the Customs Authorities immediately if demanded.

When the Consignees have not received the original documents and they wish to take delivery of the goods from the Custom House they must present a Bank guarantee, drawn up in accordance with the form approved by the Shipagents Association.

Cargo manifested to this country in transit to other countries without documents for Uruguay may not be re-shipped to other countries without government permission.

Marks on goods imported to Uruguay

By a Decree dated 30th January 1939, the Uruguayan Government decided that:

"Packages entering Bonded Warehouse, excepting those containing provisions or beverages, and excepting also 'Barraca' articles, shall be marked with the gross weight, the nett weight and corresponding measurement, in a clear and legible manner. These marks may be either 'fire-branded or printed'.

"The 9th August 1939, the Customs Authorities requested that marks and numbers of cases entering Montevideo warehouses should be placed on the extreme ends".

The Customs Authorities have also made known that it is necessary for the packages entering the warehouse to show their weight and measurement in the decimal-metric system.

The inspection of potato cargoes can be effected on board the carrying vessel, and if found in good sanitary condition, can be discharged direct to shore.

Opening and Closing of Hatches

This can be carried out by either crew or stevedores, and hatches must be kept closed when not in use.

Shipments of Meat

These are controlled by the Ministry of Agriculture, whose inspectors check ships' holds before shipment can commence. Holds must be clean and disinfected and temperature controlled to minus 1° to a maximum of plus 1° Celsius for chilled meat, or minus 10° for frozen meat.

Chilled is to be hung on hooks adjustable for height and space and stow of frozen must give a uniform distribution of weight. Alternatively, special cuts are packed and shipped in cartons.

Containers

Use of containers is very limited, since these must be opened up and emptied on the dock alongside, or even on board the vessel. The container itself is considered as part of the vessel's gear, and must be reshipped without delay.

On rare occasions the Armed Forces have had containers moved out to their barracks.

The Port Authority is buying a crane to handle containers of 8 ft. × 8 ft. × 20 ft. and a maximum loaded weight of 44,800 pounds.

Consular Dues

All ships arriving at Montevideo must pay Consular dues, with the following exceptions:

Ships that due to a change en route, or by special call of their Agents in Uruguay, during passage, arrive at Montevideo with the sole purpose of receiving orders, as long as no commercial operations are effected.

Ships arriving in distress and which leave port without effecting operations.

Ships arriving for the sole purpose of landing or embarking pilot.

The Ministry of Foreign Affairs consider bunkering as an operation, therefore ships calling at Montevideo for bunkers must pay Consular dues.

Consular value of the Uruguayan Peso – For the payment of fees abroad, the Executive Power will fix periodically the respective values of the peso, in accordance with exchange fluctuations.

Hours of Attendance at the Uruguayan Consulates – The Office hours of the Consulates will be those fixed by the Government in agreement with the Consuls in each country, endeavouring in each case to have the same working hours as those of the Custom House and other Public Offices of each City. Outside these hours, overtime is charged.

Consular dues on Bills of Lading – When vessels load cargo for Uruguay at ports where there is no Uruguayan Consulate, these dues are collected when the vessel arrives at Montevideo or at any other Uruguayan port. The Agent then recovers these charges from the Consignees.

CREW:

Deserters – Captains and/or Agents must report any deserters when the vessel sails. The Maritime Authorities give intervention to the Police Department, and if the men are located, the Agents must hand them over to the respective Consuls. However, the Agents continue to be responsible before the Authorities for the ultimate repatriation of the men, which must be done at first opportunity.

Vessels are subject to a fine per man. The Agents have also to pay repatriation expenses, in cases where the respective Consuls will not do so.

They must also deposit a guarantee which can be used for repatriation expenses in case the deserter stays in the country for more than 15 days.

Time limit for getting crew members left behind out of the country – According to law, Agents must arrange that such crew members leave the country within fifteen days. This period of grace commences as from the date of vessel's departure in respect of deserters and for those disembarked for medical treatment as from date on which they are medically certified as fit for travel.

Upkeep of men left in hospital or temporarily disembarked and traced deserters – The Agents are responsible for the maintenance of men disembarked for medical treatment, or temporarily with a special Immigration permit, and for deserters, until they leave the Country.

Stowaways – Captains of vessels having stowaways on board must report them to the Authorities, stating their name and port of embarkation. The stowaways must be kept on board. If they escape and are found after the vessel sails, Agents will be responsible for their repatriation and upkeep charges until they leave the Country. As with deserters, vessels with stowaways on board are liable to a fine per man if this regulation is not complied with.

Agents must also deposit a guarantee per man, amount to be used for repatriating the stowaway or for conveyance to the port of embarkation.

Landing members of crew – Paying off men for other than medical assistance is not permitted, but exceptions are granted in special cases. An application must be presented by the Agents to the Immigration Department, and if the permit is granted, a formal declaration is signed by the Captain of the vessel, the Agents, the Immigration Inspector and the person wishing to disembark, setting forth length of time he is going to remain in the Country and conditions of departure. The personal documents of the person allowed to land, remain in charge of the Immigration Board.

If any member of the crew is landed for medical treatment or paid off without the corresponding permit, the vessel will be fined.

Gangways and Rat-Guards

A gangway must be placed and ready after a vessel comes alongside the quay, but this must not be presented before coming in to the quay. Authorities will only come aboard by the gangways.

Gangways must also have a lifebuoy with suitable line attached and handy, and a safety net must be placed under the gangway, otherwise shore labour will not board vessels, with consequent delay.

The gangway must also be brightly illuminated at night; an oil lamp is not sufficient.

As soon as vessel is securely moored, regulation size (not less than 80 cms.) rat-guards must be placed on all ropes, wires, fenders, lines and hoses.

Heavy fines are imposed for non-compliance with any of these or other regulations.

Overside Discharges

All overside discharges from latrines, bathrooms, gallery, scuppers, engine room, etc. must be screened or covered when vessel is alongside the quay, as vessels will be fined if the discharge falls on the dock or gangway.

Adjustment of Compasses

Vessels proceeding through Magellan Straits – The disposition issued by the Chilean Shipping Authorities on 13th April 1953, states:

"When a foreign ship arrives at the Magellan Straits and applies for a pilot, official or private, for navigating the Channels, the Pilot must first check the compass for deviations of more than 5 degrees, and if such deviation has been determined more than 6 months ago, especially in a place with great difference of latitude or different hemisphere, compensation of compass is obligatory when not in true order, and a written declaration to this effect will be made in the pilotage agreement. The Authorities will also send an officer to verify that the compass is in satisfactory condition before entering the Straits".

To avoid probable delays, ships heading for the Straits can make the necessary compensation in the Port of Montevideo or in the ante port whilst waiting for orders for departure. This port is most convenient for this class of compensation because at the present moment there is no magnetic variation and also because it is a quiet harbour with sufficient depth for turning. A compass adjuster may be obtained at any time.

200 Mile Limit and Fishing

Uruguay has declared sovereignty over 200 miles off shore, reserving all fishing and undersea exploitation rights. A number of foreign flag vessels fishing without permits have been seized and heavily fined, their catch and gear being confiscated.

Permits are obtainable, but in no case for vessels over 500 tons gross, to operate within sixty miles from shore, while all activity in territorial waters (200 miles) is forbidden in the months of May and June.

Garbage

Garbage is collected every morning by truck. There is a strict prohibition of dumping anything into the port, and oil tanks must not be cleaned within 30 miles of the coast, and on a falling tide.

Old dunnage should not be dumped or sold, without permission from the Authorities, through Agents.

Ships' Boats

Use of ship's boats is forbidden within the port, unless they are being lowered, with prior permission, for maintenance or exercises.

Fenders

All vessels must have at least 2 large fenders, to keep them 5 feet or more off the quay. If the vessel has no fenders, or due to deck cargo cannot use them Agents should be warned in advance to rent the necessary equipment and have it ready on arrival.

Dropping Anchor when Berthing

If an anchor is dropped when approaching a dock to berth, to control the vessel as she moves in, it is essential that the anchor should be hove in again once the ship is moored. Port regulations require this and any damage to other craft, real or imaginary, through fouling anchor or chain, would cause considerable trouble.

COLONIA: 34.28 S. 57.51 W.

On the right bank of the River Plate from seaward exactly 27 miles in a straight line E.N.E. of Buenos Aires, to which it is connected by ferry and hydrofoil services.

DOCUMENTS/PILOTAGE/HEALTH/RADIO: See beginning of Uruguay section.

DESCRIPTION: There are 3 accesses to the port, of which only 2 are of use to ocean-going vessels. Canal del Medio, for those coming down river, with 18 ft. and Canal Gabriel from S.W.

The port consists of an angled breakwater, and a basin with 3 quays. One of these, with 15 ft. is used for ocean-going vessels and has 4 × 3-ton cranes and 2 × 5-ton cranes.

The West quay is for coastal vessels, with only 13 ft. of water.

FUEL: Not available.

FRESH WATER: Available.

MEDICAL: Attention available.

CONSULS: Argentine, all others at Montevideo.

FRAY BENTOS: 33.06 S. 58.18 W.

Km 95 River Uruguay. On the right bank of the River Uruguay from seaward 213 miles by river from Montevideo or 145 miles from Buenos Aires.

DOCUMENTS/PILOTAGE/HEALTH/RADIO: See beginning of Uruguay section.

RESTRICTIONS: Vessels loading should pay particular attention to the daily river and draft forecast issued by local authorities. Draft depends on depth at the Marques and Punta Caballo passes.

MAX. SIZE: For berthing maximum draft 26 ft. fresh water, depending on river conditions.

BERTHING: Official Pier: 325 m. long, depth in deepest berths 26 ft. Grain and general cargo handling. Railway Pier: 1 berth, depth 26 ft., used principally for discharging coal. Anglo Pier: Depth alongside 26 ft., used for loading frozen meat and products.

STEVEDORES: Working hours: 0700 – 1100 and 1300 – 1700. Saturdays: 0700 – 1100 hrs.

MEDICAL: Doctors and hospital facilities available.

FRESH WATER: Obtainable from berth at Official and Anglo Piers.

FUEL: Not available.

REPAIRS: Only minor repairs can be effected.

CONSULS: Argentina is represented locally. All others at Montevideo.

MONTEVIDEO: 34.55 S. 56.13 W. (See Plan Book)

DOCUMENTS/PILOTAGE/HEALTH/RADIO: See beginning of Uruguay section.

APPROACHES: The Roads of Montevideo consist of the Outer Roads situated to the South of the bay and Inner Roads situated outside the Western breakwater.

Both anchorages are very exposed and vessels are recommended to enter the anteport.

The entrance channel has 30 ft.; the channel to Ancap's wharf (La Teja) 30 ft. 6 in. Basins 1 and 2 have a depth of 28 ft. to 31 ft., and the River Traffic Basin, 15 ft. These depths depend on dredging being maintained, but even so vessels often "drag" when on the higher marks; the bottom is fine soft silt.

PILOTAGE: A system of ship control has been set up for Montevideo and its approaches.

The system of control and information comprises:

1. *Zona "Alfa"*. Zone of the River Plate, situated between Long. 55° 30′ W. and 56° 15′ W., the coast and the limit of the River Plate with the Argentine Republic.

2. *Zona "Bravo"*. Zone between the meridians which encompass Punta Yeguas and Punta Brava, the coast, and parallel Lat. 35° 01′ S. It also comprises the Access Channel of the Port of Montevideo, Anteport, Basins, the channel to the Inflammables Basin, and the Inflammable Basin (ANCAP).

Control and Information Centre:

1. The system is controlled from the Prefectura Nacional Naval, Pilot Office, situated on floors 11, 12 and 13 of the Edificio Aduana, Lat. 34° 54′ 07″ S., Long. 56° 12′ 07″ W. (Custom House Building).

2. The call-sign of the Control and Information Centre is CWC104, henceforth to be known as Control Montevideo Prefectura.

A — *Channels and Frequencies.*

The Channels for transmission and reception to be used are the following: (it is intended to utilize Channels which will not interfere with 12 and 14, used by the control and security system of the River Plate of the Argentine Prefectura Nacional Maritima).

Channel	*Frequency*		*Employment*
16	156.800 mHz		Call-sign and Security
11	156.550 mHz	(3)	Broadcast by the Centre Calls to the Centre by vessel navigating in Zone A; eventually Zone B.
13	156.650 mHz	(4)	Broadcast by the Centre Calls to the Centre from vessels navigating in Zone A, eventually Zone B.
9	156.450 mHz	(5)	Port Operations
10	156.500 mHz	(9)	Port Operations and eventually Channel 11
15	156.750 mHz	(14)	Emergency (to be installed)
6	156.300 mHz		Inter-ship calls
8	156.400 mHz		Inter-ship calls

B — *Listening-out by Vessels.*

1. Vessels will maintain a listening-out watch on Channel 16 from the moment they enter the Zones of the system until they are tied up alongside, in the Port of Montevideo, or until they leave the Zones of the system.
2. Whenever a vessel may not, for some reason, listen-out on Channel 16, it will pass to Channel 11 or 10, informing the Control and Information Centre of this.
3. In Zones A and B, vessels will communicate with the Centre on Channel 11 (eventually 10).

C — *Language.*

The personnel operating the Centre use Spanish. Any vessel which cannot use the Spanish language may do so in English, and if any further difficulties are encountered, may make use of the international code, the international word/letter system or the 'Q' code.

D — *Communications from Ships (Messages).*

Ships navigating in Zone:

1. ALFA: Must inform the Centre of the following details:
   a) Entering the Zone: Flag; Name of the ship; Destination; Position (Lat., Long., and time); Course and Speed; ETA Channel Entrance Buoy; Max. Draft.
   b) During navigation her position: Abreast of Flores Island; Abreast of the Channel Entrance Buoy; If comes to anchor in any position in the Zone.
   c) Leaving the Zone.
2. BRAVO:
   a) Dropping or weighing anchors in the Roads.
   b) Will inform the Centre, while navigating in the channel or within the port: Passing the "Calpean Star"; Passing the breakwaters; Anchoring in the Anteport; Docking or Undocking in Basins; Dropping or weighing anchor in the Zone.
3. IN ALL ZONES: Must give the following information to the Centre:
   a) Any accident, damage, or fire on board the vessel.
   b) Any assistance rendered to any other vessel in distress or in difficulties.
   c) The sighting of any object hazardous to navigation which is not buoyed.
   d) Any marked reduction in visibility.

E — *Further communications to the Centre.*

1. Regarding Pilots:
   a) That which is specified by the General Pilot Regulations.
   b) Time of boarding or disembarking.
   c) Request from the Master to change anchorage or berth.
   d) Any possibe difficulties in pilotage.

F — *Other requirements*

a) Any vessel taking up a mooring, unmooring or anchorage, must request to carry out the manoeuvre required. It is to be understood that the Master will have complied with all the necessary formalities required by the Authorities for entry or departure of the vessel.

b) This permission expires automatically after 15 minutes of its being given further permission must be applied for in order to carry out the manoeuvre.

G — *Information Service*

The Centre will issue:

1. Notices to Mariners at 0900 hrs. and at 1500 hrs. local time. Urgent information will be broadcast immediately it is received.
2. Meteorological reports every 4 hours commencing at 0001 hrs. local time.

The Centre will provide to any vessel information with regard to Maritime Traffic, weather, security in navigation, and any port information which may be used to speed up or aid the vessel's future operation.

e Eastern breakwater projecting from Punta Sarandi is 940 m. long and the breakwater lying to the West at right angles with the Eastern one is 1,300 m. long. The passage between the 2 breakwaters is 300 m. wide.

ANTEPORT: The Anteport is to the North of the entrance, between the breakwaters, and has 27 ft., but requires dredging, there not being safe room for more than 5 vessels at present.

PORT: The port is formed by the North side of the Montevideo Peninsula and the "Dique de Cintura", a breakwater running parallel to the coast, about 840 m. distant.

It consists of 3 basins, 2 of which are for ocean-going vessels and 1 for river traffic.

Basins 1 and 2 have a depth of 30 ft., and the basin for river traffic 15 ft.

ANCHORAGE: In Montevideo outer or inner roads. Vessels must not anchor within 0.5 mile of the entrance channel to the anteport, nor in the area bounded by Lat. 35° S. and 35° 15′ S. and Long. 55° 56′ 30″ W. and 56° W. where there are submarine cables. Outer roads and inner roads are separated by the Western breakwater. Both anchorages are exposed in bad weather.

Captains of vessels anchoring in the roads should bear in mind that as the bottom consists of soft clay, it does not afford a good hold for the anchors, which are liable to drag during a severe storm. In consequence, precautions should be taken to anchor at a safe distance from other vessels already riding at anchor, and to use a stout anchor and chain, while having another ready for emergency.

A vessel that anchors in the Outer or Inner Roads and does not effect commercial operations is not considered an arrived vessel in Uruguayan waters, and is not boarded by the Authorities.

Semaphores: There are 2 Semaphores, 1 on the corner of Depot 1, on Pier A, which controls traffic in the port and which is in constant touch with Pilots on board through the "walkie-talkie". At night the following emergency code signals are used.

Red light	meaning stop
Green light	meaning proceed
White light	meaning anchor

These are beamed with an aldis lamp to the bridge of the vessel and must be obeyed.

The other semaphore is situated 47 m. above sea level, on the S.W. post of the anemometric tower of the Central office, and indicates wind forecast as follows:

Red Red	strong wind starting to blow from the N.W.
White White	strong wind starting to blow from the S.W.
Red White	strong wind starting to blow from the N.E.
White Red	strong wind starting to blow from the S.E.
Red	strong wind from indeterminate quarter.
Green	winds over 100 km/hour are expected.

MAX. SIZE: Up to 30 ft. fresh-water draft. Also see "Tankers".

TIDE: Rise and fall is nominal, rarely exceeding 1 ft.

TUGS: Compulsory for vessels berthing in the harbour basins. 2 tugs normally used, join vessel in the anteport.

Booms – Masters are reminded that the Port Authorities require a special boom to be placed on the side of the vessel where the nose of the tug will push, to avoid damages and subsequent claims.

BERTHING: Anteport: 7 anchorage berths in 28 ft. depth. However in practice there is rarely room for more than 5 vessels to anchor. Basin No. 1: 7 berths, 28 to 33 ft. depth alongside. Basin No. 2: 4 berths, 28 to 33 ft. depth alongside. La Teja: Ancap basin with berths for 2 tankers 30 ft. depth in basin and entrance channel.

Berths are allotted by the Port Authorities in the order of arrival of the vessels and according to their category, as follows:

1. Mail vessels.
2. Regular Line vessels carrying immigrants.
3. Cargo vessels.
4. Sailing vessels.

The Authorities allocate the deposit at which vessel must discharge or load.

Port Authorities give preference at Deposit No. 10 to ships operating with refrigerated cargo from this Deposit; and at Deposit No. 11 (Florida Wharf) to tankers discharging to the pipe-line situated there. Conditional that they vacate the berth within 2 hours notice, to permit berthing a preference vessel, other ships may operate at either berth.

Muelle de Escala – On the pier head, formed by the Southern side of the River Traffic Basin, and running Westwards, a quay has been built, known as "Muelle de Escala", 288 m. long, originally constructed for berthing passenger liners and war vessels, but now only used by cargo vessels, loading and discharging, when there is port congestion. There are no shore cranes and work is very slow, nor are there shore deposits. A fixed heavy lift boom capacity 200 tons is placed at the East end.

The berth is very exposed to wind and swell, and Masters are recommended to take every precaution to ensure their vessels are strongly moored and a lookout kept for changes of weather which, locally, are very sudden.

The depth of water alongside depends on dredging, but generally is over 28 ft.

River Traffic Basin – This basin is situated on the Western side of Pier "A". It is 400 m. long and has a passenger landing station on one side. The opposite side of the basin is used for coastal vessels, but mainly by the Navy.

2 warehouses, called Warehouse "A" and Warehouse "B", have been built on the East side of this basin and are serviced by 3 electric cranes. In addition, there are on the quay a 1.5 and 6-ton steam crane, which are employed when necessary.

These berths can only be used by light-drafted vessels, as depth of water is around 16 ft.

Basin No. 1 – This basin is situated between piers "A" and "B". Its entrance between the "Dique de Cintura" and the pier head "A" is about 150 m. wide. It encircles a total mooring space of 1,093 linear metres and 7 vessels can comfortably berth along the quay walls.

Pier "A" is 501 m. long on the West side; 306 m. on the East side, and 50 m. wide at the Northern pier-head.

On this pier 2 brick and concrete warehouses, Nos. 1 and 2, have been constructed, consisting of a ground floor, 3 storeys and a basement.

On the City side of Basin 1, there are 3 brick warehouses, numbered 3, 4 and 5, consisting of a ground floor of between 17,800 and 19,600 cu. m. capacity.

On the Western side of Pier "B" facing Basin No. 1, there are 2 brick and concrete warehouses, Nos. 6 and 7, with a ground floor and 1 storey having a capacity of 30,174 and 33,140 cu. m. respectively.

In Basin No. 1, berths Nos. 1, 2, 3, 4 and 5 are generally used for the discharge and/or loading of liners running to timetable.

Depths alongside vary, as it depends upon dredging, but generally are 26 ft. to 30 ft.

Basin No. 2 – This basin is situated between Pier "B" and the foot of Florida Street. The entrance to this basin is also about 150 m. wide. It has a total mooring space of 722 m. and it can accommodate 4 vessels.

Pier "B" is 294 m. long on the Western side, 328 m. long on the Eastern side, 148 m. at the Northern pier-head and 13 m. wide on the bend at the Western corner of the pier-head.

At the Northern end of pier-head "B", livestock is embarked. This berth is also used for general cargo operations in times of congestion. Moorings must be strong and carefully watched as the berth is very exposed to wash of passing vessels.

There are 2 warehouses on this pier, numbered 8 and 9, facing Basin No. 2, built of brick and concrete, with a ground floor and 1 storey and with a capacity of 33,320 cu. m. each. On the city side, there are 2 warehouses, built of brick, numbered 10 and 11, consisting of a ground floor with a capacity of 15,362 cu. m. each. Warehouse No. 10 carriers an additional storey, and is being used for refrigerated cargo. Vegetable oils can also be loaded at Warehouse 11 berth ex pipe-line from 4 storage tanks each of a capacity around 1,250 tons, in the vicinity.

Depths of water alongside vary, depending upon intensity of dredging but are generally 28 to 30 ft.

Coasting Quay Wall – From Florida Street to Mole F, which is the end of the Port, and over a distance of 1,900 m., there is a quay used for coastal craft, and on part of which a fish-receiving and industrialising plant is being opened; depth in this zone is 15 ft.

A floating dock is also anchored in the N.E. part of this section.

Basin For Inflammables "La Teja". (Also see "Tankers".)

On the North side of the Bay, the National Administration of Alcohol, Cement and Fuels, known as A.N.C.A.P., has a basin with concrete walls for the discharge of tankers arriving with oil to their consignment. This basin is known as the "Darsena de Inflamables", and has 1 berth for tankers on the North side in 30 ft. 6 in. and for liquid gas discharge on the Southern side, max. draft 22 ft., while on the West or land side there is a berth for coastal vessels. Width of the basin here is 147 m., which is the same as the entrance, while the South berth is 248.75 m. long. On the North berth the jetty protrudes 34 m., and is 96 m. long.

Vessels berth bows to shore, and on leaving turn immediately outside the basin, if draft is less than 22 ft., otherwise they must reverse back down the narrow access channel.

The North berth has separate lines for Crude, 10 in. and 12 in. maximum pressure 105 lbs. Fuel Oil, 8 in. and 10 in. with a pumping rate of 300 t.p.h. at temperatures between 40° and 70°C. Diesel/Gas Oil/Kerosene 6 in. connections and pumping rate of 300 t.p.h. Naptha 8 in. Lube oils 6 in. lines, 150 t.p.h. and a line for Alcohol 6 in. There is no line for Gas. There are 3 × 5-ton electric cranes and 1 × 12-ton diesel crane. Coal and Cement are also discharged at this berth, the coal to Decauville cars and the Cement to trucks, handling 750 tons per 8 hour day, with 5 gangs.

At the South berth the oil lines are identical, and there is also a 6 in. connection for loading or discharging Super Gas, at 200 t.p.h. There are no cranes at this berth.

The Western berth has the same installations except for Super Gas and Alcohol.

There are 3 in. water lines at each berth, and use of 2 tugs is essential for berthing or unberthing. At the North berth, vessels fully loaded often lie up to 15 m. out from the quay, owing to accumulation of mud, and will gradually close in as the vessel lightens. Access gangways are placed by the Port.

Railway Connections – Basins 1 and 2, River Traffic Basin and also Deposits "A" and "B" have railway lines on all sides, belonging to the Port Administration, which are connected with the main lines of the Uruguayan State Railways.

The Port Administration has 2 electric locomotives used exclusively in the port.

Cranes – The Port Administration has 1 heavy-lift floating crane of 80,000 kilos, a mobile crane of 20,000 kilos, also 46 movable electric cranes of 5,000 kilos each; 5 movable electric cranes of 1,500 kilos each; 1 fixed electric crane of 4,000 kilos; 33 of the aforementioned 5,000 kilos cranes, are placed alongside the quay walls for vessel's operations.

There are also 24 electric trolleys of 1,500 kilos, and one of 1,000 kilos. There is a fixed crane for 200 tons on Muelle Escala.

Fiscal Lorries – The Port Administration has purchased special lorries and 12 auto cranes for receiving cargo, as the railway wagons available are not sufficient to carry all the cargo that is at present being handled at this port.

Loading Operations – Loading is effected from carts, lorries and/or wagons and the cargo is hoisted on board with the cranes. Cargo is also loaded from lighters.

Grain Loading – There are 2 Mobile grain vacuvators, each of which can load bulk grain at around 35/50 t.p.h, also 10 smaller machines that can each load around 20 t.p.h.

Fumigation – Montevideo is the only port in Uruguay at which vessels can fumigate, using the Cyanide method. The tariff is per cubic metre fumigated over a basic charge which varies according to nrt. There are surcharges for overtime.

Disinfection of Mail Bags – To avoid delay through disinfection mail bags can be fumigated on board in a 10% formalin solution and kept in a closed space for 4 hours before vessel gets into port. The closed space will be opened in the presence of a Health officer who will verify the use of formalin. When in doubt, fumigation will be carried out again and exposed for 2 hours.

Height of Quay above water – Tide being very small, the height of quay above water only varies from 8 to 10 ft. at low water to 10 to 12 ft. at high water. Wind influence is felt even in the bay, as a South wind will raise water as much as 5 ft., or a Northerly wind reduce it 2 or 3 ft.

New Equipment – In process of supply:

Fork-lift trucks – 3 of 5 tons and 1 of 6 tons, to lift to 3 m.

Container lifter – 1 to lift to 22.4 short tons, size 8 ft. × 8 ft. × 20 ft.

Fork extensions for fork-lift trucks in use – 25 pairs.

Mobile cranes (diesel) – 2 capacity 7.5 tons with telescopic arm up to 10 m., turning through 360°; 8, capacity 7.5 tons, fixed arm; 1 capacity 10 tons with telescopic arm up to 12 m., 360°; 1 truck-mounted crane no less than 60 tons, with arm not less than 21.5 m.

Pallets – material for making 15,000 pallets, in 2 sizes.

Slings for these pallets, also for heavy-lift cargo for use with the mobile cranes.

Lighters – 7 new lighters, ranging from 100 to 400 tons.

STEVEDORES: Working hours: 1st shift, 0700 to 1300 hrs.; 2nd shift, 1300 to 1900 hrs.; 3rd shift, 1900 to 0100 hrs.; 4th shift, 0100 to 0700 hrs.

Normal capacity per gang per hour: *(a)* Rice – about 80/90 tons per gang/hour. *(b)* Meat – about 60/100 tons per gang/hour.

Overtime is compulsory if port is congested.

Lavatory Conveniences for Shore Labour – Each vessel must furnish conveniences for all shore labour employed on board. Work has been stopped until such conveniences are installed. It is advisable, therefore, for vessels calling at Montevideo to be equipped with 2 spare lavatories, 1 for talley clerks and 1 for stevedores, etc.

FRESH WATER: Fresh water is supplied by the Port Authorities at all quay berths. Request must be made through the Agents, vessels supplying their own hoses where possible. It is important that the water meter should be read together with the Port official both at connecting and disconnecting to verify the exact quantity. The cost of water is high.

FUEL: All grades available by barges during loading/discharging. Vessels calling for bunkers only are refuelled in the anteport. There are 2 barges, capacities respectively 311 tons and 598 tons.

TANKERS: Apart from La Teja Basin, mentioned above, tankers discharge in Basin No. 2 at Muelle Florida. Distance to oil tanks is considerable and discharge rate is about 80/100 t.p.h. Heavy grades of cargo require high heating to facilitate discharge.

At La Teja, vessel's max. dimensions LOA 230m., Draft at HW. 31 ft. Max. d.w.t. 35,000. Max. loading rate 300 cu.m./hour. Max. discharge rate 850 t.p.h.

REPAIRS: All repairs possible.

DRY DOCKS: 2 dry docks available: Nacional, length 463 ft., width 61 ft. Maua, length 260 ft., width 28 ft. Also a floating dock, lifting capacity 12,000 tons, 545 ft. long and 93 ft. wide.

Entrance is by turn, counting from presentation of the application, but this may vary.

(a) when the vessel has damage to repair.

(b) when there is a fixed sailing date.

(c) when a vessel requires a dock for no more than 4 days, and is preceded by 1 requesting 15 days or more.

(d) when by reason of size a vessel cannot enter with another which is on turn.

(e) national Naval vessels.

GANGWAY/DECK WATCHMEN: Shore watchmen compulsory. Arranged by Agents. 1 required on deck and 1 for each gangway. Vessels carrying dangerous cargo must also employ a guard of the Prefectura.

Vessels calling for supplies only, for orders, in distress or to land sick crew members or to enter dry dock, need not employ Watchmen. Repairs afloat require a watchman, if they do not carry out commercial operations.

Shifts are of 8 hours, commencing at 0700 hrs. Vessels under repair, and those at Ancap moles may fix 12-hour shifts, paying a shift and a half.

If special watchmen are required for goods or working equipment, application must also be made to the Union.

If watchmen are needed in the holds, same applies.

Regulations also require a watchmen in the holds wherever the ship has a crew member, cadet or officer permanently on watch to prevent pilferage. However, where ship's personnel are in the hold to watch the stowage of the cargo, no extra watchman is required. Masters should therefore, advise Agents if they intend to place crew members permanently in the holds during discharge, so that Agents can advise the Association before they make their claims.

Care must also be taken on arrival, since the watchman is on duty from 0700 hrs. on, whereas it may be necessary to place the gangway safety net, etc., before that time, so that Pilot may disembark.

Only those involved in this operation should go ashore. The Receiving Commission may ask for the gangway to be opened before 0700 hrs., which is in order, but no one else should use the gangway to avoid claims from the Union.

Vessels lying in the anteport must provide launches for the transport of watchmen employed.

DENSITY: This varies according to wind and tide. The degree of salinity is broadcast daily in the weather reports by radio, and varies from fresh to brackish to sea water. Steady South winds give the highest degree of salinity.

CONSULS:

Arab Republic of Egypt	A. D. Cosa 3469	789904
Argentina	Rio Branco	Tel. 80897
Austria	Sarandi 693	914000
Belgium	Leyenda Patria 2880	701265/70
Bolivia	Rio Branco 1320	912394
Brazil	18 de Julio 984	911145/46
Czechoslovakia	L.B. Cavia 2996	787808
Chile	Canelones 1165	910695
China (Nationalist)	Fco. Soca 1128	790312,790577
Colombia	Soriano 791	82606
Denmark	Rio Branco 1389	915238
Ecuador	21 Setiembre 2816	70727
El Salvador	Piedras 434	80852
Finland	Solis 1533	914386
France	Uruguay 853	912791
Germany (W)	La Cumparsita	84958, 88041
Germany (E)	Echevarria 3452	788010
Great Britain	Cerrito 420	912501
Greece	Misiones 1481	912148
Guatemala	Dr. Francisco Soca 1397	782104
Holland	L. Patria 2880	701631
Honduras	Misiones	80894
Hungary	Prudencio de Pena 2469	786173
Iceland	J. B. Blanco 715	702565
Israel	B. Artigas	404164/66
Italy	J. B. Lamas 2859	785316
Japan	Rincon 487	913936
Korea	Av. Brazil 2385	787679
Lebanon	Fco. Solani Antunia 1882	701834
Mexico	Juncal 1305	916890
Norway	Colon 1580	987121
Panama	J. B. Blanco 715	703620
Paraguay	Rio Negro 1370	984775
Peru	Juan Gomez 1492	984743
Portugal	Prudencio de Pena 2486	781915
South African Rep.	Rincon 487	986956
Spain	Libertad 2750	780048
Sweden	Av. Brazil 3079	780088
United States of America	H. A. Santos 808	409051, 409126
Venezuela	Av. Artigas 1253	493005
Yugoslavia	Av. Espana 2697	788129

LAYING UP MONTEVIDEO: Montevideo Ante-Port is considered the most convenient and cheapest place for vessels arriving in the Plate in ballast, unfixed, to anchor, lay up or await orders.

Vessels could subsequently load at any of the Argentine or Uruguayan River Ports and would also be in a handy position to load at an Argentina South Atlantic coast port. She could also be ordered away again from the Plate in ballast having incurred no heavy pilotage bills or other expenses, as would be the case had vessel proceeded up to, and anchored in Buenos Aires Roads, or entered an Argentine port.

The expenses at Montevideo, including inward and outward pilotage, light dues and clearance, are not high, and no written permit is necessary for a vessel to lie in the anteport, but the permission of the Captain of the Port must be obtained in each case.

This permission will not be refused unless there is congestion in the anteport.

No vessel can be laid up at Uruguayan ports, unless a responsible shipping Agent is nominated to attend.

HOLIDAYS: 1st and 6th January, Carnival Monday, Shrove Tuesday, Easter (6 days), 19th April, 1st and 18th May, 19th June, 18th July, 25th August, 12th October, 2nd November, 8th and 25th December.

AIRPORT: International airport with world-wide connections.

TIME: GMT minus 3 hours. Summer time may be kept.

SHORE LEAVE: Allowed.

TELEPHONES: Can be connected on board vessels berthed at the quays.

AUTHORITY: Administracion Nacional de Puertos.

NUEVA PALMIRA: 33.53 S. 58.25 W.

Situated on East bank of Uruguay River, 155 miles above Montevideo. Km. 0 on River Uruguay.

DOCUMENTS/PILOTAGE/HEALTH/RADIO: See beginning of Uruguay section.

RESTRICTIONS: Vessels loading should pay particular attention to the daily river draft forecast, issued by local authorities. Draft controlled by depth of San Pedro Channel.

ANCHORAGE: Off Montevideo.

MAX. SIZE: Up to 25 ft. draft fresh water depending on river conditions.

TUGS: Not required. Mooring launches available.

BERTHING: Manganese Pier: Depth alongside 24 ft. Loading rate: 600 t.p.h. Pier Head Berth: Depth alongside 24 ft. Grain loading.

STEVEDORES: Working hours: 0700–1100 and 1300–1700 hours. Saturdays: 0700–1100 hrs.

MEDICAL: Doctor and hospital facilities available.

FRESH WATER: Obtainable from berths.

FUEL: Not available.

REPAIRS: Only minor repairs can be effected.

GENERAL: Refer to "Montevideo" for all general information.

PAYSANDU: 32.18 S. 58.06 W.

Situated on the East bank of Uruguay River, 380 kms. above Montevideo.

Km. 204 on River Uruguay.

DOCUMENTS/PILOTAGE/HEALTH/RADIO: See beginning of Uruguay section.

RESTRICTIONS: River navigation controlled by depth in the passes at Almiron, Vera and Urquiza. Since river conditions vary from season to season, Agents should be consulted beforehand regarding available draft at any particular time.

ANCHORAGE: Off Montevideo.

MAX. SIZE: Up to 20 ft. draft fresh water, depending on river conditions.

TUGS: Available.

BERTHING: Grain Elevator Berth; 30 ft. depth alongside. General Cargo pier has been demolished. Coastal Berth: Length 300 m. Depth 4.5 m. Ancap Pier: 1 berth for tankers, 22 ft. depth.

There is 1×5-ton crane on the grain quay, and 3×3-ton cranes on the coastal berth. Loading on the Ancap berth is by lorry.

STEVEDORES: Working hours: 0700–1100 and 1300–1700 hrs. Saturdays: 0700–1100 hrs.

MEDICAL: All assistance available.

FRESH WATER: Available at all berths.

FUEL: Not available.

REPAIRS: Minor repairs can be effected.

CONSULS: Local representation for Argentina, Brazil, Italy and France. All other Consuls at Montevideo.

GENERAL: Refer to "Montevideo" for all general information.

NOTES

Please also advise Shipping Guides Ltd.

Venezuela

GENERAL: *Berthing Priority:*

The Venezuelan Ministry of Communications has decreed, through the Directorate General for Transport and the Port Captaincies, the following new docking priority system:

1. Vessels owned by the C.A. Venezolana de Navegacion or chartered by that company.
2. Venezuelan vessels belonging to private companies.
3. Vessels of other countries.

Previously, vessels chartered by the C.A. Venezolana de Navegacion did not get priority treatment and it is understood that, with these new priorities, the number of vessels with docking privileges has been tripled, thus resulting in greater delays for vessels operated by foreign companies.

AMUAY BAY: 11.46 N. 70.15 W. (See Plan Book)

OPERATORS: Lagoven, S.A.

ESSENTIAL REQUIREMENTS:

1. Incoming vessels must send ETA at least 3 days before arrival at Amuay Bay. During hours of darkness all vessels must identify themselves on arrival either by radio-telephone or aldis, preferably the former.
2. If a ship originally cleared for another port (including some other Venezuelan port) is diverted at sea to Amuay Bay, certain information must be radioed prior to arrival to avoid heavy fine and/or delays. See "Radio".
3. No dirty ballast may be pumped overside in port or in Venezuelan coastal waters. Ballast disposal facilities are available at Amuay Terminal.
4. The use of Venezuelan Government Pilots is compulsory for docking and for movements inside the bay.
5. The Venezuelan flag should be displayed at the mast-head during daylight hours by ships anchored and berthed in Venezuelan waters.
6. In addition to other clearance documents, 2 copies of an itemised list of articles in the ship's chest must be presented to Authorities on arrival.
7. Emergency fire signal is 5 long blasts on ship's whistle or siren. No other signal is to be given in the case of emergency.
8. Ratguards must be in place on all mooring lines.

LOCATION: The port of Amuay Bay is located on the Gulf of Venezuela, on the West Coast of the Paraguana Peninsula, Venezuela. The seabuoy marking the entrance to the bay is located in Lat. 11° 44′ 25″ N., Long. 70° 14′ 50″ W.

DOCUMENTS: Inward clearance is effected on board immediately after docking by Government Port Officials and a representative of the Marine Department. It is necessary that the following documents be ready on arrival:

Clearance from last port (Consul Mail) 1 visaed.
Ballast Certificate from last port (1 copy, visaed according to paragraph *(a)* if there is no Venezuelan Consul).
Crew Lists (5 copies).
Passenger Lists (5 copies visaed).
Baggage List (3 copies visaed).
Lists of Personnel Effects (3 copies not visaed).
Store Lists (3 copies, see note below).
Lists of Slop Chest (3 copies not visaed).
Sailing permit (Zarpe).

Vessels arriving with cargo to discharge, will also require:

Manifest (Sobordo) (1 original visaed and 2 copies not visaed from each loading port).
Consular Mail (1 sealed envelope from each loading port).
Bills of Lading, 1 original and 1 copy visaed, and 4 copies not visaed from each loading port.
Tally Books (6 from each loading port).
Consular Invoice (3 originals visaed and 3 copies not visaed from each loading port).
Commercial Invoices (3 from each loading port).

Note: 1. The Store and Provisions Lists may be prepared on board prior to arrival unless the ship is coming from the Netherland Antilles, the Guianas or any other islands in the Antilles which have not attained independent status, in which case 2 copies must be visaed by the Venezuelan Consul at the port of departure.

2. The Slop Chest List is not required if included in the Provisions List.

(a) Cargo and clearance documents should be visaed by the Venezuelan Consul at the last port of call. In the absence of a Venezuelan Consul, they may be visaed by the Consul of a friendly nation, by the Chamber of Commerce, or by 2 reputable merchants, the latter's signatures to be notarised. In the absence of a Venezuelan Consul the following notation should be written on each document, in Spanish, and signed by the alternates designated above:

"Por no existir en la localidad Agente Consular Venezolano y a peticion de los embarcadores, certifico el presente documento."

(Signature) ....

Although vessels proceed directly to Amuay Bay, clearance documents should be prepared showing the port as Las Piedras, Paraguana (Amuay Bay). Failure to observe this requirement may result in penalties up to a maximum of Bs.2,000.

Admeasurement Certificate: All ships calling at a Venezuelan port for the first time must be measured for tonnage by the Captain of the Port. It is the usual practice to take ashore the ship's Panama Canal or Suez Canal Certificate, or any other certificate with which Venezuela is in agreement, which is used as a basis for recalculating tonnage under the Venezuelan Regulations, and is returned before sailing. The Venezuelan Admeasurement Certificate, when later issued, is forwarded to the owners. A fee is charged for this certificate, which is payable only on the ship's first call. Vessels registered in the following countries are excluded from the above regulations: Netherlands, Germany, France, Portugal, United Kingdom, Denmark, Sweden, U.S.A, Ireland and Norway.

Vessels that were originally cleared for another foreign port, or another Venezuelan port, and were subsequently diverted at sea, should radio the following information to "Lagomar-Judibana" prior to arrival:

Vessel's name
Master's name
Vessel's flag
Number of crew
Estimated time of arrival.
Last port of call
Port for which originally cleared
Grade and quantity of cargo to be lifted.

This information is required in order to make in advance special arrangements for inward clearance, to avoid payment of fine.

Outward clearance and cargo documents are delivered on board by the Marine Dispatcher. However, in order to obtain the sailing permit, a special form, delivered on board on arrival, must be completed, not later than 2 hours before sailing time. This form gives cargo and freeboard information by the Captain of the Port.

In the event the berth is required by another vessel, a vessel having completed loading may be required to vacate the berth promptly and proceed to anchorage to await cargo documents.

PILOTAGE: Pilots are employees of the Venezuelan Government and pilotage is compulsory for vessels entering or leaving the harbour. The Marine Department will arrange for Pilots to board all vessels as necessary.

The Pilot acts in an advisory capacity; the Master retains responsibility for the ship at all times. In the event it becomes necessary to disregard the Pilot's instructions in order to ensure the safety of the ship, the Master must forward through the Marine Department a full written report of the circumstances, for delivery to the Captain of the Port.

ANCHORAGE: For vessels awaiting berth, there is a good anchorage about 1 mile N.W. of the seabuoy in 8 to 12 fathoms with a sand and mud bottom. Ship Masters are requested not to anchor at a distance greater than 3 miles from the seabuoy.

RESTRICTED AREA: A restricted fishing area has been established by the Venezuelan Government which is prohibited for mechanically propelled vessels drawing more than 5 ft. This zone lies within the area off the Paraguana Peninsula from Punta Macolla, Lat. 12° 5′ 32″ N., Long. 70° 12′ 55″ W., to Punta Estanques (Los Taques), Lat. 11° 48′ 45″ N., Long. 70° 16′ 45″ W., and a line connecting the positions below indicated: Lat. 12° 07′ 40″ N., Long. 70° 14′ 25″ W.; Lat. 12° 03′ 15″ N. Long. 70° 19′ 23″ W.; Lat. 11° 49′ 25″ N., Long. 70° 21′ 50″ W.

HEALTH: *Sanitary Inspections:* A close control of veneral diseases has been put into effect by the government Sanitary Office.

Immediately after docking a Sanitary Inspector will board the vessel and all Crew members will be checked before going ashore. Those persons found with infection must be sent to the Government Anti-veneral Clinic for proper medical attention and return to vessel before sailing. 20 Bolivares per ship.

Shore passes will be granted to all wealthy persons.

Masters are required to cooperate in this campaign.

MAX. SIZE: Length 1,000 ft.; draft 43 ft. Also see "Berthing".

TUGS: Tug-boat assistance is considered essential and is afforded all vessels entering, leaving or shifting in the harbour by 2 × 1,600-h.p. tugs. Disposition and manoeuvres of tug-boat are directed by the Pilot, who uses a "walkie-talkie" to convey orders to the tugs.

BERTHING: 4 finger piers provide 8 berths, numbered 1 to 8, from South to North.

	1	2	3	4	5	6	7	8
Max. Arrival d.w.t. (m.t.)	70	92	24	44	16	30	16	30
Max. departure d.w.t. (m.t.)	112	112	48	48	38	38	94	94
Max. Draft (S.W.)	43′	43′	*37.6′	*37.6′	*37.6′	*37.6′	*37.6′	43′
Max. Length Ship	1000′	1000′	650′	700′	700′	700′	856′	856′
Max. Beam	Unl.	Unl.	Unl.	†	†	†	†	Unl.
Bow to manifold distance	495′	495′	300′	320′	330′	330′	340′	340′

Ballast line, fresh water and all grades bunkers at all berths.

*The max. draft will be increased to 40 ft. in 1979.

†Max. beam permissible varies dependent upon the beam of vessel berthed on other side of the slip.

The use of an anchor when docking is permitted at all berths. It is considered prudent to have the outboard anchor hove-out prior to entering the harbour in order to facilitate speedy release if necessary while docking. The Pilot will advise whether the ship is to be berthed port or starboard side to the dock.

Products handled:

Berth No. 1 & 2: F.O., heating, heavy distillates, TJ-102, topped crudes, all crudes.

Berth No. 3 & 4: Lubes, F.O., LCT asphalts (penetration).

Berth No. 5 & 6: Naphtha, jet fuel, crudes, F.O., heating, MC/RC asphalts, kerosene, TJ-102, topped crudes, LCT (pref.).

Berth No. 7 & 8: Naphtha, kerosene, heating, F.O., jet fuel, MC/RC asphalts, all crudes except TJ-102.

RADIO: The cable and telegraphic address for the Lagoven S.A. at Amuay is "Largomar Judibana". Radio messages to and from ships at sea are routed through "shipward 2 New York" for retransmittal through aircon system to Judibana (Amuay Bay).

Radio notice of arrival should be sent 72 hours prior to arrival at Amuay.

Ship-to-shore telephone: Radio-telephone listening watches are maintained on a 24-hour basis in the Marine Office on the following frequencies: 2182 kc/s.; 156.8 Mc.

International telephone: International telephone calls are routed through Caracas, Venezuela. Telephone number is Punto Fijo area 069-51557. (It is usually difficult if not impossible to complete a call.) Telex: 54193 Lagoven.

Also see "Documents".

LOADING: Loading rates particulary for low-flash products loaded during the hours of darkness or when topping-off cargo tanks, will be reduced by the terminal to meet existing conditions.

All loading and discharging will be stopped during the passage of an electric storm, and ullage covers must be closed and dogged down. During periods of calm, loading of gasoline or other similar low-flash products may be loaded at reduced rates or loading stopped if the heavy vapours are not being dispersed quickly enough to prevent hazards from accumulated gas pockets. Ship's officers are cautioned to be on their guard during such conditions.

Loading rates will be reduced when topping-off, if requested by the ship's officer.

Some of the fuel cargoes are loaded from fuel reservoirs through certified positive displacement meters, and shipping documents are prepared on the metered figures. All reconstituted crudes are line blended with conditions recording of component rates and quantities. Actual loading rates of both this crude and metered fuel cargoes are available at any time upon request of the standby.

Instructions as to grade or grades of cargo, and the approximate loading rate anticipated, will be given to the Master on completion of inward clearance. Supplementary information including number and size of lines and hoses will be furnished to the Chief Officer before loading commences.

If vessel's loading orders from owners or charterers do not agree with the terminal's orders, either as to grades or quantity, the marine representative should be advised immediately. The terminal is authorised to load 10% more or less than the quantity nominated; if the cargo to be lifted will be more or less than this 10% limitation it is necessary to cable New York for confirmation.

A terminal employee is stationed at each pier during the entire time the ship is discharging ballast, bunkering, or loading cargo. Fifteen minutes "stand-by" notice should be given to this man prior to completion of ballast, bunkers, or cargo.

Vessels loading liquid and flaked sulphur: *For vessels loading liquid sulphur, the following applies:*

Location: Pier 2, berth 3 at Amuay Bay.

Draft – 40 ft., length overall – 700 ft., beam – no limitation.

Loading will be at the rate of 400 long tons per hour through a 6 in. line and rubber hose.

Maximum cargo size – 25,000 long tons.

Normal loading temperature is 275° F. Minimum – 265° F. Maximum – 295° F. Density at normal loading temperature is 112 pounds per cu. ft. Viscosity at same temperature is 8.5 centipoises.

Safety precautions/provisions: Molten sulphur classified as "Grade E Liquid" by U.S. Coast Guard. No naked light, open flames or sparks should be permitted near any tank openings. Molten sulphur is combustible but is handled at temperatures below its flash point (325-370° F) and ignition temperatures (476-502° F).

For vessels loading flaked sulphur, the following applies: Physical characteristics of the loading facilities:

(a) Location: Lat. 11° 44′ N., Long. 70° 14′ W. Anchorage approximately 2,000 ft. South Punta Adaro with a depth of 33 ft. 400 yards offshore and dropping off to 50 ft. 1,000 yards offshore. In the rare event that the wind is Westerly the vessel would anchor further offshore.

(b) No draft, length or beam limitation. (Vessels loading up to 24 ft. draft may be anchored inside the bay).

(c) Loaded barges whose overall dimensions are 200 x 42 x 17 ft. will be brought alongside with the aid of tugs and removed when required, barges will be equipped with fenders. The hoppers are 160 × 37 × 14 ft. Loading from barges to ship will be done using ships gear and clam shells of 1.25 ton capacity. Clam shells will be furnished by Lagoven free of charge. Personnel (stevedores) to carry out the loading operation will be supplied by Lagoven or the ships crew can be used if this is set forth in the charter party. Loading rate 1,000 long tons per day.

(d) The anchorage is sheltered in the lee of the Adaro peninsula. Wave heights vary between 1 and 2 ft.

(e) Normal Maximum parcel size – 10,000 tons loaded at a rate of 1,000 tons per day, however, an additional 2,500 tons can be supplied at a loading rate of 500 tons per day.

(f) Flaked sulphur when stored in large quantities varies in density from 55 to 90 pounds per cu.ft. Average density is anticipated to be 70 lbs./cu. ft. Individual flakes are of irregular shape and are less than 0.5 sq.in. in area and less than 0.0625 in. thick. This size data is not a specification nor guarantee and is provided only to indicate the order of magnitude dimensions.

General:

Fee of Bs. 200 will be charged for trips between the Terminal and the anchorage by launch or tug for delivering personnel.

Method of cargo quantity determination: Barge drafts are marked to the nearest inch and capacity tables prepared by Charles Martin. The draft prior to commencement of and upon completion of discharging are noted. The amount transferred is obtained by consulting the tables. The quantity arrived at by totalling the amounts from the barges used is compared to the ships figures and reconciliation reasoned.

BALLAST: Vessels should arrive with sufficient ballast to permit safe handling. The Pilots require a draft of min. 8 ft. forward,18 ft. aft, on a T-2 or similar size tanker, 11 ft. forward and 20 ft. aft on a 26,000 d.w.t. or larger vessel. Ballast should be carried in a minimum number of tanks, and all other tanks stripped, so as to minimise deballasting time.

A relatively small amount of salt water remaining in ship's tanks or lines can contaminate crude and cause operating problems for the refiners. It is important therefore to strip tanks and lines as dry as possible.

Vessels provided with completely segregated ballast system are permitted to discharge ballast and load cargo simultaneously.

Absolutely oil-free ballast may be discharged overside. All dirty ballast must be pumped ashore. A 30-in. ballast line, 2×60,000 and 1×120,000 barrel slop tanks and separator system are available.

A considerable number of vessels are now participating in the programme to eliminate pollution of the seas. Under this programme, vessels may arrive carrying quantities of oil/water emulsion. If it is desired to follow the "load-on-top" procedure in such instances, it is requested that the Marine Representative be informed on arrival.

MEDICAL: Medical treatment and hospitalisation, if required, is provided at a hospital located in the Lagoven concession, operated by the Society of Catholic Medical Missionaries. Several dentists are located in the area.

Italian Crew members covered by Casa Maritime insurance receive medical attention from the appointed medical representative in Punto Fijo.

Authorisation forms for medical and dental treatment are provided, which require Master's signature. Transportation is available at the Marine Office. Please note that if the patient does not speak Spanish or English, an interpreter should accompany him.

FUEL: Ship's requirements specifying grade and quantity desired are to be given to the Marine Representative boarding the vessel on arrival. All grades of bunker fuel, intermediate fuels and Diesels are available except Esso diesel. Bunker delivery rates average 2,500/3,500 barrels per hour. Bunkers are loaded through meters which automatically register quantities on bunker receipts.

It is the responsibility of ship's engineer to give "standby" notice to the terminal employee and advise him when to shut down.

FRESH WATER: Fresh water can be supplied if necessary; however, supplies are limited to essential requirements. All fresh water is piped from distant sources. Loading rate is about 10 t.p.h.

CUSTOMS: Venezuelan laws are strict in regard to contraband and Masters are requested to instruct their crews not to take cigarettes or other articles ashore. Cigarettes in carton lots, cigars, tobacco, souvenirs, gifts (particularly items of women's apparel) should be collected prior to arrival in port, listed with the items in the slop chest and placed in the custody of the Master for deposit in the slop chest or closet which will then be sealed for the duration of the vessel's stay in port.

Firearms on board any merchant vessel calling at Venezuelan ports must not exceed one per officer, nor can the ammunition exceed 18 cartridges per officer, All firearms and ammunition must be noted on the stores list. Officers must not carry firearms while the ship is in Venezuelan waters and these sidearms and ammunition should be collected and held in the Master's safe custody. Crew members should be warned against taking knives or other weapons ashore.

While the vessel is in port, Venezuelan National Guard Officials are assigned on board to ensure compliance with Customs regulations. The law requires that meals be supplied to these officials during regular meal hours. Masters are requested to give them the privilege of eating in the officers' mess-room, to avoid difficulties.

DENSITY: The usual specific gravity of sea water at the berth is 1025, temperature ranges from 78°F. to 85°F.

CONSULS: Brazil, Great Britain, Italy, the Netherlands, and Norway have consular representatives in the area.

TIME: GMT minus 4 hours.

SHORE LEAVE: Also see "Health". Shore passes will be granted to all healthy persons. A representative of the Captain of the Port boards on arrival and issues the required number of passes. Shore passes are to be collected prior to sailing and given to the Pilot undocking the vessel. Vessels are not permitted to sail until all Crew members are on board, unless hospitalised or prior arrangements made for disembarking. A letter to this effect is required from the Master.

REGULATIONS: (i) *Pollution:* The laws of Venezuela are very strict in regard to the pollution of harbour and coastal waters by oil, and heavy fines are imposed for violations. No dirty ballast, oil or bilge slops are to be pumped or allowed to escape overboard. All overboard discharge valves from cargo tanks and bilges are to be secured before loading or discharging commences. Loading is to be conducted with the greatest care and vigilance in order that errors or delays in handling cargo valves may not result in overflows. All deck scuppers should be plugged before loading to avoid harbour contamination should an overflow occur. The Authorities require that a written report be submitted by the ship involved in the event of an oil spill.

(ii) *Gangways:* All vessels using the port of Amuay must provide a safe gangway. The use of rung ladders, pilot ladders, etc., is contrary to Port Regulations, and Port Authorities will not board except by means of a safe gangway or accommodation ladder.

(ii) *Passengers:* Passengers will not be permitted to disembark unless in possession of the required visa and documents. To facilitate clearance, if passengers are carried, the Master should include advice to this effect in his radio ETA.

(iv) *Visitors:* All visitors to ships are prohibited except those company employees, petroleum inspectors, etc., whose duties require their presence aboard.

(v) *Rats:* Rat guards required at all times.

GENERAL: *(a) Weather Conditions:* There is little rainfall at Amuay Bay; annual precipitation averages 12 in. The so-called rainy season usually coincides with the Caribbean hurricane season, from August to November, although Amuay lies South of the usual hurricane track. During these months calms are often experienced and winds from a Westerly direction may be expected. Normal winds are steady from the N.E., average force 4, Beaufort Scale, with a max. of force 8. Temperatures average about 85°F., with little variation from day to night or season to season.

(b) Tides: The normal range of the tide is about 12 in.; however, a 28-in. range has been observed during spring tides.

(c) Lubricating oil: Supplies of Essomarine lubricating oils are available. Requirements should be given in vessel's radio notice of arrival.

(d) Bonded Stores: Cigarettes or other stores in bond are not obtainable in Amuay Bay.

(e) Cash Advances: The local currency is the Venezuelan Bolivar and cash advances are made only in this currency. It is requested that any requirement for cash advances be included in the vessel's ETA radio, to permit delivery on board on arrival.

(f) Charts: No supplies of charts or sailing directions are available at Amuay Bay.

(g) Laundry: A 6 hour laundry service is available throughout each working day. Such service should be requested in the vessel's ETA message.

(h) Mail: Itemised lists are required for ship's mail, to be signed by the Master. Unless other instructions are given, ship's mail received after sailing, or for vessels on which no advice has been received, will be held for 30 days and then returned to Owners or Operators at ship's expense.

(i) Inspection – Petroleum Products: Chas. Martin & Co. and E. W. Saybolt, petroleum inspectors, are available if specified. Telephone numbers, Chas. Martin 44665, 44650 and 44211; Saybolt 44639, 44645 and 44227.

(j) Norwegian Government Seamen Service: A field representative of the above service is stationed at Amuay providing Norwegian and Swedish film exchange and other usual services. His telephone number is 51459.

(k) Personnel – Seamen Left Ashore: In the case of seamen left ashore for hospitalisation, repatriation or other reason, all documents and personal effects are to be delivered to the Marine Office before sailing. A letter is required from the Master advising the maximum advances to be made to the seamen, if any, and instructions concerning his repatriation. All expenses incurred by seamen left ashore, including cost of repatriation, are for ship's account.

It is important that Masters bear in mind that the Venezuelan law will at all times hold the vessel, her Master, Agent or owner, responsible for any seamen left behind in Venezuela.

(l) Provisions and Stores: Provisions and stores in limited quantities are available, the prices and quality of some items, such as fresh fruit, fish, shrimps, vegetables, etc. are competitive; dry stores are considerably higher than in most ports. The Port Steward will assist in filling requisitions.

(m) Radar and Radio: Radar and radio repairs can be effected in Amuay. A service repair man is available, but spare parts are limited.

(n) Repairs: Shore facilities are available only for emergency repairs of a minor nature. The nearest dry docks are those at Puerto Cabello and Curacao, N.A. Several contractors in the area provide labour for hull painting and for tank cleaning. Contracts for these services are made by the ship's Master directly with the contractor.

(o) Surveyors: There are no appointed surveyors to American Bureau of Shipping or Lloyd's in the area. However, with sufficient advance notice, arrangements can be made to have their nearest representatives come to Amuay to attend surveys.

(p) Walport Film Exchange: Subscribers to the Walport Service may exchange films at the Marine Office.

(q) Plimsoll Marks: The Captain of the port requires that the Plimsoll Marks of all vessels using the port be clearly visible. Vessels will be checked on completion of loading, and if the Plimsoll Marks are not readily legible, permission to sail may be withheld.

(r) Landmarks: Three conspicuous radio towers, 350 ft., painted alternate red and white bands, with red flashing aircraft warning lights, are located in the refinery area, 1 mile East of the docks.

ATTENDANCE: Representatives of the Marine Department board vessels immediately on arrival, and it is particularly requested that Masters indicate at that time all ship's requirements. The Marine Office Building is located at the Pierhead Trestle and personnel are available for assistance at all hours. Telephones are located on all docks and the Marine Shift Supervisor can be called on telephone No. 444475 or 444465.

CARIPITO: 10.09 N. 63.02 W.

OPERATORS: Lagoven, S.A.

LOCATION: Caripito is located on the West bank of the San Juan River in Lat. 10° 09′ 25″ N., Long. 63° 02′ 01″ W.

ESSENTIAL REQUIREMENTS:

1. Incoming vessels must send to Caripito their ETA Guiria at least 3 days in advance followed by confirmation 48 and 24 hours before arrival.

2. If a ship originally cleared for another port (including some other Venezuelan port) is diverted at sea to Caripito, certain information must be radioed to Caripito prior to arrival to avoid a heavy fine and/or delays. See "Radio".

3. No dirty ballast may be pumped overside in port or in Venezuelan coastal waters. Limited ballast facilities are available at Caripito Terminal.

4. Vessels calling at Caripito must obtain Government Pilots at Guiria.

5. The Venezuelan flag must be displayed during daylight hours while vessel is within port limits.

6. The emergency fire signal in Caripito dock area is 6 short blasts and 1 long blasts on ship's whistle or siren. No other signal is to be given in the case of emergency.

APPROACHES: The traffic in San Juan River is restricted to one-way from Marieta Point to Caripito. Therefore, instructions are issued at Guiria to incoming vessels relative to what action to take on arrival at Marieta Point. Outbound traffic is controlled so as not to conflict with these instructions.

1. Guiria. The town of Guiria is located on South coast of Paria Peninsula on N.W. shore of Gulf of Paria. When approaching from East a signal tower will be observed on a bluff slightly to North of town.

2. Maturin Bar. Buoy E-1, marks the entrance to Maturin Bar Channel. At Punta Gorda there is a light tower located in approximate Lat. 10° 09′ 50″ N., Long. 62° 37′ 52″ W. displays a flashing red light.

3. Channel. Maturin Bar Channel is 14 miles in length and 400 ft. in width. The tidal range over the bar varies from 4 ft. 6 in. to 4ft. 9 in. with currents up 3 knots. The average salinity of water is 1.009; however, this may vary considerably between wet and dry seasons and spring and neap tides. Maximum draft permitted by Venezuelan regulations is 34 ft. in fresh water. There is a restriction of 6 in. less for all motor tankers. On leaving Maturin Bar Channel the San Juan River narrows from approximately 1.25 miles in width to about 0.7 miles with slight variations in width up to Marieta Point where it narrows to about 1,200 ft. and varies between 800 and 2,000 ft. up to Caripito. Marieta Point marks intersection of Cano Frances and the San Juan River. It is also at this point that course of San Juan River changes approximately 100° to starboard and it is the beginning of one-way traffic. Frequently, incoming vessels are requested to anchor below this point to await outbound traffic. There are 32 lights marking strategic points in San Juan River between Maturin Bar and Caripito terminal. These light towers are painted aluminium and are easily visible during daylight hours.

DOCUMENTS: (also see under "Radio").

1. *Clearance (inward and outward).* Inward clearance is effected at Caripito. The sanitary inspector boards vessel at anchor or at berth depending on tidal conditions and/or the availability of a berth. The Customs and other Government officials usually board at the berth. However, should there be a delay awaiting berth or tide, the entry will be granted while vessel is at anchor, in which case accommodation ladder must be rigged.

It is necessary that the following documents be ready on arrival:
Ballast List (1 original, visaed).
Passenger List (5 copies, none of which visaed).
Baggage List (5 copies, none of which visaed).
Crew List (7 copies, none of which visaed).
Sailing Permit from Last Port (1 original, visaed).
Stores List (5 copies, see *Note*).
List of Personal Effects (3 copies, none of which visaed).
List of Contents of Slop Chest (3 copies, none of which visaed).
List of Passengers in Transit (5 copies, none of which visaed).

Note: The Stores Lists may be prepared on board prior to arrival unless ship is coming from Netherlands Antilles or the Guianas, in which case they must be visaed by Venezuelan Consul at port of departure.

2. *Cargo documents.* The Port of Caripito has in force a system of cargo documentation for expediting the sailing of vessel. It is as follows:

a. Certain documentation with approximate cargo figures of unofficial nature are placed on board and official cargo documents are airmailed to discharge port.

b. Blank signed documents are placed on board to vessel's departure from Caripito and thence correct figures are radioed to sub-agency at Guiria who delivers them in writing to Master, who acknowledges its receipt by signing carbon copies of transmittal sheet.

PILOTAGE: Pilots are employees of Venezuelan Government and act in an advisory capacity. The Master retains responsibility for ship at all times. In the event it becomes necessary to disregard the

Pilot's instructions in order to ensure the safety of the ship, the Master must forward through the Marine Department a full written report of the circumstances, for delivery to the Captain of the Port.

Pilots are compulsory and are embarked and disembarked at port of Guiria through a sub-agent. Vessels should proceed to the Guiria sea buoy (position 10° 33′ 12″ N. 62° 15′ 00″ W.) and await instructions. If arriving during the hours of darkness, certain instructions are usually transmitted by light signals from the signal tower. Voice radio communications can be established at any time with Guiria or Lagoven Caripito on frequencies 2182 kc/s, 2638 kc/s and 2738 kc/s. The launch which embarks the Pilot will also deliver instructions to the Master relative to the movements of his vessel en route to Caripito, port regulations, facilities, etc. The regular pilotage fees cover the area from the entrance to Maturin channel to and from Caripito. The Pilot is to be provided sleeping quarters and food equal to that provided the officers aboard ship.

Note: Complaints or observations concerning the Pilot's handling of vessel should be noted on back of pilotage ticket.

TIDES: The normal range of tide in the dock area is about 12 ft. with currents up to 3 knots during the flood and 4 knots during the ebb in rainy season (May-December). The normal current is 2.5 knots during the flood and 3 knots during the ebb.

ANCHORAGE: For vessels awaiting berth, there is an anchorage about 1,000 m. up-stream from the Caripito terminal. Vessels awaiting clear channel may at times be requested to anchor at Punta Marieta. Vessels awaiting high tide anchor at Punta Marieta or off Punta Gorda.

MAX. SIZE: Vessels up to 745 ft., 52,000 d.w.t. and max. draft *33 ft. (FW) at No. 2 berth and LOA 630 ft., 32,000 d.w.t. and max. draft *33 ft. (FW) at No. 3 berth.

*Safe draft per tide tables.

RADIO: The cable and telegraphic address for Lagoven at Caripito is "Lagomar - Caripito". Messages to and from ships at sea are routed through the Government Radio Station at Maiquetia (La Guaira), call letters "YVG". This station operates on a 24-hour continuous watch, on the following frequencies:

Listening Frequencies: low frequency, 500 kc/s; high frequency, 4178, 6267, 8356, 12534, 16712, 22225 kc/s. Transmitting Frequencies: low frequency, 500, 472, 464, 417 kc/s; high frequency, 4322, 4352, 6505.5, 6519.5, 8722, 8730, 12817.5, 17141.6 kc/s. Radio notice of arrival should be sent 72 hours prior to arrival at Guiria and corrected if weather or other conditions delay the vessel.

Radio telephone listening watches are maintained on a 24-hour basis at Guiria and at Caripito on 2182 kc. The following frequencies are available for communications after contact: 2638 kc and 2738 kc.

All vessels en route to Caripito may also communicate with Amuay or La Salina Marine offices and request that message dealing with corrected ETA's, Pilots and other business be relayed to the Caripito Marine Office.

Vessels that were originally cleared for another foreign port, or another Venezuelan port, and were subsequently diverted at sea, should radio the following information to Creole Caripito prior to arrival:

Vessel's name
Master's name
Vessel's flag
Number of crew
Estimated time of arrival at Caripito.
Last port of call
Port for which originally cleared.
Grade and quantity of cargo to be lifted.

This information is required in order to make in advance special arrangements for inward clearance, to avoid payment of a fine. It is necessary in such a case that the following documents be ready on arrival:

Crew List (original and 6 copies).
List of Personal Effects (original and 2 copies).
List of Contents of Slop Chest (3 copies).
Stores List (original and 1 copy).

Also required are the original and 2 copies of the radiogram instructing Master to proceed to Caripito. Outward clearance documents are placed on board the vessel prior to departure from the Caripito terminal.

Masters should bear in mind that while vessels are within Venezuelan territorial waters, Government authorities do not permit the use of ship's radio equipment. Cables and radiograms should be handed to the company representative for transmittal via shore radio communication system. Caripito has also radio telephone communication with North and South America and Europe. For further information contact Port Services Section in the terminal building, telephone C-335.

BALLAST: Ballast is not required when mooring. Any ballast carried should be in a minimum number of tanks, and all other tanks stripped, so as to minimise deballasting time.

A relatively small amount of salt water remaining in ship's tanks or lines can contaminate crude and cause operating problems for the refiners. It is important therefore to strip tanks and lines as dry as possible.

Vessels provided with completely segregated ballast system are permitted to discharge ballast and load cargo simultaneously. All ballast clean or dirty must be pumped ashore. Contaminated residues may be pumped ashore, where facilities are available for receiving up to a max. of 20,000 barrels.

A considerable number of vessels are now participating in the programme to eliminate pollution of the seas. Under this programme, vessels may arrive carrying quantities of oil/water emulsion. If it is desired to follow the "load-on-top" procedure in such instances, it is requested that the Marine Representative be informed on arrival.

BERTHING: The Marine Office Building is located on the West bank of the San Juan River upstream from the berths. Representatives of the Marine Department board vessel immediately upon arrival and it is particularly requested that Masters indicate at that time all ship's requirements. Personnel are available for assistance at all hours.

Lagoven maintains a deep water terminal, consisting of 2 ocean tanker berths, Nos. 2 and 3. These are T-type piers with breasting dolphins located approximately 10 ft. off the face of each pier.

All terminal facilities are under the control of Lagoven, S.A. The port is open for navigation during day and night. All ocean tankers are moored at berths No. 2 and 3 on the flood tide only. Vessels may sail from berth No. 3 at any stage of the tide. Sailings from berth No. 2 are restricted to flood tide only when berth No. 3 is occupied.

A vessel entering or leaving port must be assisted by the same Government Pilot taken aboard at Guiria. A Custom guard will board at the same time and remain with the vessel. A Lagoven Representative will deliver to the Master his loading and docking instructions together with any other information pertinent to the vessel's call. He will also sign the Notice of Readiness if requested. The vessel will proceed to anchor to await flood tide to dock, to await berth, or will swing to the flood tide in the turning basin and proceed directly to the berth depending on circumstances.

LOADING: Loading rates, particularly for low-flash products loaded during the hours of darkness or when topping off cargo tanks, will be reduced by terminal to meet existing conditions.

All loading and discharging will be stopped during passage of an electric storm, and ullage covers must be closed and dogged down. During periods of calms, loading of gasoline or other similar low-flash products may be loaded at reduced rates or loading stopped if the heavy vapours are not being dispersed quickly enough to prevent hazard from accumulated gas pockets. Ship's officers are cautioned to be on their guard during such conditions.

Loading rates will be reduced when topping off, if requested by the ship's officer.

Instructions as to grade or grades of cargo, and the approximate loading rate anticipated, will be given to the Master. Supplementary information including number and size of lines and hoses will be furnished to the Chief Officer before loading commences.

If vessel's loading orders from Owners or charterers do not agree with terminal's orders, either as to grades or quantity, the marine representative should be advised immediately. The terminal is authorised to load 10% more or less than the quantity nominated; if the cargo to be lifted will be more or less than 10% limitation consultation is necessary.

A terminal employee is stationed at each pier during the entire time the ship is discharging ballast, bunkering, or loading cargo. Fifteen minutes"standby" notice should be given to this man prior to completion of ballast, bunkers, or cargo.

MEDICAL: Medical treatment and hospitalisation, if required, is provided at a hospital located in the concession. Several dentists are located in the town of Caripito. Authorisation forms for medical and dental treatment are provided, which require Master's signature. Transportation is available at the Marine Office. Please note that if the patient does not speak Spanish or English, an interpreter should accompany him.

FRESH WATER: Fresh water is available in any quantity. Delivery is made through 2.5 in. national standard fire hose thread hydrants. Ship's personnel must provide hoses and connect up.

FUEL: Bunker "C" fuel oil, marine diesel and intermediate fuels are available. It is the responsibility of ship's engineer to give "standby" notice to the terminal employee and advise him when to shut down.

CONSULS: There are no consular representatives in the area. Vessels bound for U.S.A. or British Caribbean ports will be provided with a letter stating this fact.

CERTIFICATES: All ships calling at a Venezuelan port for the first time must be measured for tonnage by Captain of the Port. It is the usual practice to take ashore the ship's Panama Canal or Suez Canal Certificate, which is used as a basis for recalculating tonnage under the Venezuelan regulations, and is returned before sailing. The Venezuelan Admeasurement Certificate, when later issued is forwarded to the Owners. A fee is charged for this certificate, which is payable only on ship's first call. Vessels registered in following countries are excluded from above regulations: Netherlands, Germany, France, Portugal, United Kingdom, Denmark, Sweden, U.S.A., Ireland and Norway.

CUSTOMS: While the vessel is in port, Venezuelan National Guard officials are assigned on board to ensure compliance with Customs regulations. The law requires that meals be supplied to these officals during regular meal hours. Masters are requested to give them the privilege of eating in the officers' messroom, to avoid difficulties.

Venezuelan laws are strict in regard to contraband and Masters are requested to instruct their crews not to take cigarettes or other articles ashore. Cigarettes in carton lots, cigars, tobacco, souvenirs, gifts (particularly items of women's apparel) should be collected prior to arrival in port, listed with the items in the slop chest and placed in the custody of the Master for deposit in the slop chest or closet which will then be sealed for the duration of the vessel's stay in port.

Firearms on board any merchant vessel calling at Venezuelan ports must not exceed 1 per officer, nor can ammunition exceed 18 cartridges per officer. All firearms and ammunition must be noted on the stores list. Officers must not carry firearms while ship is in

Venezuelan waters and these side-arms and ammunition should be collected and held in the Master's safe custody. Crew members should be warned against taking knives or other weapons ashore.

REPAIRS: Only minor repairs of an emergency nature can be made. There are no electronic repair services available in the area.

SHORE LEAVE: Shore leave is permitted and a representative of the Captain of the Port boards on arrival and issues the required number of passes. Shore passes are to be collected prior to sailing, and given to the Lagoven Despatcher undocking the vessel. Vessels are not permitted to sail until all crew members are on board, unless hospitalised or prior arrangements made for disembarking.

TIME: Local time is GMT minus 4 hours.

GENERAL:

Gangways: Gangways at berths No. 2 and 3 are provided by the terminal.

Plimsoll Marks: The Captain of the Port requires that the Plimsoll Marks of all vessels using the port be clearly visible. Vessels will be checked on completion of loading, and if the Plimsoll Marks are not readily legible, permission to sail may be withheld.

Surveyors: There are no appointed surveyors to the American Bureau of Shipping or Lloyd's in the area. With 48 hours notice, non-exclusive surveyors can be obtained from Caracas, or at times from Puerto La Cruz, or qualified Masters or chief engineers may be available for appointment as surveyors when required.

Bonded Stores: Cigarettes or other stores in bond are not obtainable at Caripito.

Cash Advances: The local currency is the Venezuelan Bolivar and cash advances are made only in this currency. It is requested that any requirement for cash advances be included in the vessel's ETA radio, to permit delivery on board on arrival. Cash returns can be accepted only during the normal working day – 0700 to 1600 hrs. Sundays and holidays excluded.

Provisions and Stores: Provisions and stores in extremely limited varieties and quantities are available at prices considerably higher than in most other ports.

Charts: No supplies of charts or sailing directions are available at Caripito.

Personnel – Seamen Left Ashore: In the case of seamen left ashore for hospitalisation, repatriation or other reason all documents and personal effects are to be delivered to the Marine Office before sailing. A letter is required from the Master advising the maximum advances to be made to the seaman, if any, and instructions concerning his repatriation. All expenses incurred by seamen left ashore, including cost of repatriation, are for ship's account. It is important that Masters bear in mind that the Venezuelan law will at all times hold the vessel, her Master, Agent or owner, responsible for any seamen left behind in Venezuela.

Laundry; Laundry service is available.

Lubricating Oil: Supplies of marine lubricating oils are available from Puerto La Cruz. Quantities required should be included in the ETA cable.

Mail: Any pending ship's mail will be delivered on board by the marine dispatcher on arrival at Caripito. At the same time he will receive any ship's mail to be dispatched. The marine dispatcher will accept personal mail only if it carries the proper amount of Venezuelan postage, or if Master authorises postage by signing 7 copies of the Company Post Transmittal form. Masters interested in knowing the individual postage amounts to be paid by each crew member, should provide a list, in duplicate, of the senders, and number of letters sent by each one identified by a number written on each letter. Copy of this will be returned aboard vessel when leaving this port outward bound. If not ready on time, it will be air-mailed to the vessel's next port of call.

Inspection – Petroleum Products and Crude Oil: Charles Martin & Co. and E. W. Saybolt, petroleum inspectors, are available from Puerto La Cruz if specified.

Visitors: All visitors to ships are prohibited except those company employees, petroleum inspectors, etc., whose duties require their presence aboard.

Passengers: Passengers will not be permitted to disembark unless in possession of the required visa and documents. To facilitate clearance, if passengers are carried, the Master should include advice to this effect in his radio ETA.

Pollution of Harbour and Coastal Waters: The laws of Venezuela are strict in regard to pollution of harbour and coastal waters by oil, and heavy fines are imposed for violations. No dirty ballast, oil or bilge slops are to be pumped or allowed to escape overboard. All overboard discharge valves from cargo tanks and bilges are to be secured before loading or discharging commences. Loading is to be conducted with greatest care and vigilance in order that errors or delays in handling cargo valves may not result in overflows. All deck scuppers should be plugged before loading to avoid harbour contamination should an overflow occur. The authorities require that a written report be submitted by the ship involved in the event of an oil spill.

EL CHAURE: 10.15 N. 64.37 W. (See Plan Book)

OPERATORS: C.V.P./Llanoven.

LOCATION: El Chaure Marine terminal is located on the South shore of the head of Bergantin Bay. 1.8 miles N.E. of Puerto La Cruz: Lat. 10° 14′ 50″ N. Long. 64° 36′ 57″ W.

This terminal is also considered to be berth No. 6 of 'Puerto La Cruz' which see. It is presently under repair but expected to be operational in January 1979.

DOCUMENTS: To avoid penalties, ships clearing for Venezuelan Ports must present certain papers herein set forth for arrival and clearance after docking. The Clearance is made by Government officials accompanied by a company representative.

The following documents must be presented:

1 copy of Ship's register
Clearance from last port
1 copy of Ballast Certificate
6 copies of crew list
5 copies of Passenger and baggage list
2 copies of List of passengers in transit
4 copies of List of personal effects
4 copies of Stores list
2 copies of List of slop chest
Sailing permit issued by Marine Authority of last port of call.
Dispatch issued by Venezuelan Consul at last port.

*If ship was dispatched from a Caribbean port, store list must be visaed by Venezuelan Consul at port of departure, otherwise, list may be made on board before arrival. Lists should be made separately for deck, engine and cabin stores. If no Venezuelan Consul is available, visa may be made by Consul of a friendly nation, by Chamber of Commerce or two prominent businessmen. In these cases, when Venezuelan Consul is not available, each document should have the following notation: "Por no existir en la localidad Agente Consular Venezolano y a peticion de los embarcadores certifico el presente documento" (Signature).

Translation of above Spanish quotation: "In the absence of a Venezuelan Consul in this area and per request of the shippers, this document is hereby certified (signature).

The same authority signing the above statement must attach a dispatch (Despacho) stating ship's name, nationality, Master's name, net tonnage, port of departure, port of entry in Venezuela. This dispatch must have the signature and either seal of the authority or proof of responsibility.

PILOTAGE: Pilots are employees of the Venezuelan Government and pilotage is compulsory for vessels entering or leaving the harbour. The Company will arrange for Pilots to board all vessels as necessary. Whenever it might be deemed necessary for the Master to disregard the Pilot's advice in order to ensure the safety of the vessel, a written report must be submitted by the Master to the Venezuelan Port Captain, explaining the reason for such action.

ANCHORAGE: The crossed line portion on the plan is the anchorage zone for all ships after arrival at Pozuelos Bay. The Company will dispatch the Pilot, by launch, to all ships when they are ready to be docked. On entering the Pilot Zone, the Venezuelan flag must be flown from the foremast; it must be flown at all times between sunrise and sunset.

MAX. SIZE: Max. draft 39 ft. 6 in.

RADIO: El Chaure Terminal Office may be contacted on radio-telephone SSB or AM frequencies of 2738, 2638, 2182 and 2120 kc/s. Frequency 2182 kc/s should be used for initial contact.

Arrival advice: Masters are required to advise by cable their ETA. Such notice should reach El Chaure at least 48 hours ahead of vessel. In cases of ships being diverted at sea to a Venezuelan Port, or to another Venezuelan Port, Venezuelan regulations require, by cable, prior to arrival, name of Master, number in crew, port of departure, port to which originally cleared, flag of ship and net registered tonnage.

VHF: Channel 16 can be used after arrival at Pozuelos Bay.

TUGS: Tug assistance to moor and unmoor is compulsory at El Chaure installations. Ships over 145 m. long must use 2 tugs having not less than 1,600 h.p. each for mooring and unmooring at El Chaure. 1 launch is required for handling the lines.

BERTHING: The wharf has a length of 100 ft. with dolphins established on each side. The dock accommodates vessels drawing up to 39 ft. Sea conditions are usually very good in the entire area. Waves are almost nil and out of the hurricane path. A chain of small islands makes El Chaure a natural port. Only 1 vessel at a time can be moored for loading or unloading. The normal range of the tide is 1 ft.

BALLAST: Vessels arriving in El Chaure must carry sufficient ballast to ensure safe handling. By Venezuelan Law, all dirty ballast must be pumped ashore into ballast pits. Vessels having separate clean tanks for ballast may pump overboard, after first being inspected and passed by Port Authorities. The Company Terminal facilities include a 16 in. ballast line, which empties into ballast pits about 3,500 ft. from the dock. These pits have an elevation of 32 ft. above the dock and will hold 50,000 bbls. The ballast line will stand a pressure of 100 p.s.i.g. The pressure is recorded at the dock. The vessel will be held responsible for damages to the shore ballast line and spills that maybe occurs because of line rupture.

LOADING: Before tying up, blind flanges on the ship's manifold should be removed, hose derrick to be top and rigged to lift shore hoses along with dock booms. All vessels must dock with starboard side to dock. The Company dock supervisor will inform the Master of the vessel as to characteristics of cargo to be loaded, loading rates and all other information necessary for safe and efficient loading operations. During the ship's stay at the dock, company employees are available at all hours to assist in any manner. After loading is completed, if the dock space is required for another vessel the ship must vacate the berth and wait at anchorage until cargo and sailing papers are completed.

FRESH WATER: Available, rate 10 t.p.h.

REPAIRS: Facilities are limited; any repair work must be requested by Master in writing.

CONSULS: The following are in Puerto La Cruz: Belgium, Brazil, Denmark, France, Great Britain, Holland, Italy, Panama, Norway, Colombia, Spain, Sweden and West Germany.

SURVEYORS: Aivepet, Charles Martin & Company and E. W. Saybolt maintain offices in Puerto La Cruz for inspection of cargo if required.

TIME: Local time is 4 hours slow on GMT, year round.

POLLUTION: Pollution of coastal waters is strictly forbidden by Venezuelan Law. The escape of dirty ballast or of cargo either at the dock or in the harbour or in territorial waters will result in heavy fines by Venezuelan authorities. If oil is spilled an estimation of quantity should be made by the Master of the vessel, Venezuelan Authorities and Company personnel, acting jointly. Their joint report must be submitted to the Venezuelan Petroleum Inspector from the Energy and Mines Office, and also the National Guard Headquarters in Puerto La Cruz. The Ministry of Energy and Mines will assess a fine based on the quantity of oil that was spilled. Also the ship is held responsible for the spill and cleaning. Chemicals, equipment, boat and labour used for this purpose are for the ship Owner's and/or operator's account. Each ship must maintain strict supervision on discharging of ballast as well as loading cargo in order to avoid spillage.

CUSTOMS: Venezuelan laws are strict in regard to contraband and Masters are requested to instruct crews not to take cigarettes or other articles ashore.

GENERAL: *Crew:* Passes for shore leave for ship's crew will be given to Master by Company Representative on docking or at anchorage. These passes must be filled out for each Crew member prior to Venezuelan authorities visit. Passes may be used during the ship's stay but must be returned to the National Guard at the dock prior to departure. Before ship's departure a report must be made to the Dock Master if any Crew member is missing. Crew members left behind will be placed in custody by Venezuelan authorities until deported at vessel's expense. A Crew member requiring medical or dental treatment must submit his request for such aid through the Master to the Dock Master. Arrangements for seamen arriving from other ports, transferring to other ships or being repatriated are handled by the vessel's Agency.

Under the Venezuelan law the vessel is responsible for all seamen in the country during their entire stay. Masters are requested to leave written instructions with the Dock Master for handling seamen left ashore. The Master of the ship must indicate his acceptance of the responsibility for all costs incurred in handling a seaman.

Seaman Left Ashore: A letter from the Master is required advising the amount of cash advance and any other instructions concerning the seaman's repatriation. All expenses incurred by the seaman, including the cost of repatriation are for the vessel's account. The documents and personal effects of seamen left ashore for hospitalisation, repatriation or any other reason, must be delivered to the Terminal Office before sailing. Venezuelan Law holds the Master, ship's representatives and Owners responsible for any seaman left behind in this country.

In Dock: Masters are requested to observe the following regulations while alongside the Company Terminal:

1. – Sufficient number of Crew members must be on board at all times, during discharge of ballast and loading of cargo to ensure proper handling of mooring lines.
2. – Rat guards are to be on all mooring lines during entire stay.
3. – Venezuelan authorities do not permit blowing of heavy smoke from vessel's funnel, while in port. Breaking of this rule may result in Government fine and/or removal of ship from the dock.
4. – Venezuelan National Guard personnel are assigned to guard duty for each ship while it is at the dock. Meals must be furnished for these guards in the Officers' Messroom.

Visitors: All visitors to vessels are prohibited, without written permission of the Port Authorities. Dock Master, Petroleum Inspectors, Dispatchers and Terminal employees handling hoses may board ship in performance of their duties.

Charts: Are not available at El Chaure.

AGENCY: All incoming vessels must have a local Agent to render all services required for a prompt and efficient tanker turnaround and to cancel all vessel disbursements.

EL GUAMACHE: 10.52 N. 64.04 W. (See Plan Book)

SHIPMASTER'S REPORT: October 1978

LOCATION: The Port of El Guamache is a new developing port, located about 1000 feet northward of Pta Mangle on the Isla De Margarita (see B.A. Chart 230).

DOCUMENTS:
Clearance from last port.
Sealed envelope for Customs
Visaed B/L and Sobordos.
Despatch from last Venezuelan port, if any.
Consular Documents from last foreign port.
6 Crew Lists.
Vaccination Certificates of Crew.
4 Store Lists (Deck, Engine, Provisions, Bonded store).
4 Personal Effects Lists.
4 Arms & Ammunition Lists.
4 Passengers Lists.
4 Mail Lists

ANCHORAGE: On the Western side of the Pta Mangle in Bahia Guamache depth 8–11 fathoms.

PILOTAGE: Pilotage is compulsory. Pilot boards on arrival or at anchorage. Vessels arriving at the anchorage must keep engines on stand-by and wait for shifting or berthing instructions.

Note: As at other Venezuelan ports, vessels must fly the Venezuelan flag at masthead and lower gangway for boarding party – Agents, Customs Officers, Quarantine Officers, Immigration Officers, Pilot and representative of Port Captain etc.

RADIO: As a new developing port, no radio service at Margarita Island, all ETA wireless messages must be sent via ITT or YVG–72, 48, and 24 hours prior to arrival

The port office is equipped with radio telephone installation, operating 0600-2000 hours, transmitting on VHF frequencies 156.8 mc/s (Channel 16.) Vessels calling in Spanish language will be answered promptly; if calling in English will be answered by English speaking person when on duty.

TUGS: Not available.

BERTHING: Length 126 m. with 3 dolphins installed at each end with catwalk to dolphins. Depths of water, 36 ft. at LW and 42 ft. at HW.

STEVEDORES: Arranged by Agents, normal working hours 0700-2100, cargo discharged into warehouse.

GANGWAY/DECK WATCHMAN: Necessary, normally engaged by Customs or Police.

OPENING/CLOSING HATCHES: Normally by crew.

FRESH WATER: Not available.

FUEL: Not available.

SHORE LEAVE: Shore leave permitted. Passes issued by representative of the "Direccion De Marina Mercante" on arrival. Shore passes to be collected prior to sailing and given to Agent.

TIME: Local time is GMT minus 4 hours.

AIRPORT: Distance about 15 km. from port. Connections to other cities.

MEDICAL: Available at Polamar City about 31 km. from the berth.

PROVISIONS: Fresh and dry provisions supplied through ship chandlers from Polamar City and delivered on board.

CUSTOMS ALLOWANCE: 200 cigarettes and 1 bottle of wine or spirit.

REPAIRS: No repair facility available.

TELEPHONE: No telephone connection to vessel at present but provided inside warehouse and port office.

DENSITY: 1025

HOLIDAYS: As other Venezuela ports.

DEVELOPMENTS: El Guamache has a development programme to construct new wharves Northward from present pier to accommodate 6 ocean-going vessels and expected to complete within 3 years.

All port facilities will be available. Margarita Island is the only free port in Venezuela. Tourism from the mainland and overseas is increasing day by day as Margarita Island has very nice weather and beaches.

EL PALITO: 10.29 N. 68.07 W. (See Plan Book)

OPERATORS: C.V.P./Llanoven.

LOCATION (of El Palito Terminal): The terminal facilities operated by Llanoven S.A. at the port of Puerto Cabello (Punta Chavez), are situated on the Venezuelan coast, 7 miles West of Puerto Cabello. The terminal has a 2,475 ft. pier, part causeway and part trestle, extending out from Punta Chavez along a shallow reef then angling into water 48 ft. deep. 2 tankers can tie up simultaneously at the berths.

WEATHER: Winds are normally from the N.E. with an average Beaufort scale force of 2-3. Average temperature about 85°. The months of January, February and March have the roughest sea and swell, and vessels may not be able to dock due to the weather.

TIDE: The normal range of the tide is 1 ft.

ESSENTIAL REQUIREMENTS:

1. Incoming vessels must send ETA 72 hours before arrival at El Palito Terminal and another 24 hours before arrival advising any change of ETA.

2 If a vessel originally cleared for another port (including some other Venezuelan port) is diverted at sea to El Palito, certain information must be received prior to arrival, to avoid heavy fine and/or delays.

3 *No Ballast* may be pumped overside in port. Ballast disposal facilities are available at the El Palito Terminal.

4. The use of Venezuelan Government Pilots is compulsory for docking and undocking.

5. The Venezuelan flag should be displayed at the mast-head during daylight hours by vessels anchored and berthed in Venezuelan waters.

6. In addition to other clearance documents, 2 copies of an itemised list of articles in the ship's slop chest must be presented to the authorities on arrival.

7. The emergency fire signal is 5 long blasts on the vessel's whistle or siren. No other signal is to be given in case of emergency.

8. Rat guards must be in place on all mooring lines.

APPROACHES: The terminal pier is marked by the following lights: One occulting red light at tthe top of No. 1 (N.W.) Hose Rack, 80 ft. above sea level. Latitude 10° 29′ 51″ N., Longitude 68° 07′ 13″ W., and one green light, flashing every 3 seconds at the top of No. 2 (S.E.) Hose Rack, 80 ft. above sea level, located 275 ft. S.E. of No. 1

Hose Rack. A group of 5 crude storage tanks, painted aluminium, visible 20 miles on a clear day, are located 1.25 miles 200° from the head of the pier.

DOCUMENTS:

A. Admeasurement Certificates. All vessels calling at Venezuelan ports for the first time must be measured for tonnage by the Captain of the Port. It is the usual practice to take the Ship's Panama Canal or Suez Canal Certificate, which is used as a basis of recalculating the tonnage under the Venezuelan regulations and is returned before sailing. The Venezuelan Admeasurement Certificate is forwarded to the owners at a later date. A fee is charged for the certificate which is payable only on the vessel's first call. Vessels registered in the following countries are excluded from the above regulations: Denmark, France, Germany, Ireland, Netherlands, Norway, Portugal, Sweden, United Kingdom and U.S.A.

B. Inward clearance is effected on board immediately after docking by Government Port Officials and a representative of the Marine Department. It is necessary that the following documents be ready on arrival:

Clearance from last port (1 copy).
Ballast Manifest from last port (1 copy, visaed according to paragraph *(d)* if there is no Venezuelan Consul).
Crew List (9 copies).
Passenger and Baggage Lists (5 copies, visaed; 2 copies not visaed).
List of Personal Effects (5 copies not visaed).
Store List (3 copies, see paragraph (c)).
List of Slop Chest (3 copies not visaed).
Sailing Permit (issued by maritime authority of last port).

Vessels arriving with cargo to discharge, will also require:

Consular Mail (one sealed envelope from each loading port).
Manifest (Sobordo), 1 original visaed and 2 copies not visaed from each loading port.
Bills of Lading, 1 original and 1 copy visaed, and 4 copies not visaed from each loading port.
Tally books; 6 from each loading port.
Consular invoice: 3 originals visaed and 3 copies not visaed, from each loading port.
Commercial invoices: 3 from each loading port.

C. Store list prepared should indicate separately all deck, engine and cabin stores. The store lists may be prepared on board prior to arrival unless the vessel is coming from the Netherlands Antilles or the Guianas, in which case they must be visaed by the Venezuelan Consul at the port of departure.

D. Cargo and clearance documents should be visaed by the Venezuelan Consul at the last port of call. In the absence of a Venezuelan Consul, they may be visaed by the Consul of a friendly nation, by the Chamber of Commerce or by two reputable merchants, the latters' signature to be notarised. In the absence of a Venezuelan Consul, the following notation should be written on each document in Spanish, and signed by the alternates designated above: "Por no existir en la localidad Agente Consular Venezolano y a peticion de los embarcadores, certifico el presente documento".

(Signature)

Vessels originally cleared for another port, and diverted at sea to El Palito, should radio Llanoven Puerto Cabello the following information as soon as the change of sailing orders are received:

1. Advise diverted.
2. Name and class of vessel.
3. Number of crew.
4. Flag of vessel.
5. Last port of call.
6. Port from which originally cleared.
7. Estimated time of arrival at Pilot station.
8. Type and amount of cargo vessel will load.
9. Time required to discharge ballast.
10. Master's name in full as signature (John Jones, Master).

This information is required in order to make in advance special arrangements for inward clearance to avoid payment of fines.

Outward clearance and cargo documents are delivered on board by the Marine Dispatcher. However, in order to obtain the sailing permit, a special form which is delivered on board on arrival must be completed, not later than 2 hours before sailing time. This form gives cargo and freeboard information required by the Captain of the Port. In addition, one of the 9 copies of the crew list specified above, corrected to show any changes made while in port, should be attached to the form.

PILOTAGE: The Pilot's working hours are from 0600 to 1800 hrs. There are no special charges for their assistance during those hours on workdays. On Sundays and holidays they charge overtime. There is also a charge when ship has anchored in the bay as according to the pilotage law each movement (and entering the bay is one movement) requires a Pilot. By special agreement only Pilot's overtime will be charged for anchorage, as anchorage and docking is considered as one movement with respect to Government Pilotage Fee.

Pilotage is compulsory government service. The government charges the Pilot's assistance according to ship's net tonnage. Vessels under flags of Panama and Liberia are required to have their Venezuelan Tonnage Certificate. The government charges for docking and sailing.

Pilots are employees of the Venezuelan Government and pilotage is compulsory for vessels entering or leaving the harbour. The terminal will arrange for Pilots to board all vessels as necessary. Pilots meet the vessel via launch provided by the terminal. The Pilot may decline to moor the vessel if it is not equipped with satisfactory mooring equipment, lines, gear, etc., or if it is not sufficiently ballasted. It is the responsibility of the Master to notify the Pilot of any special conditions or peculiarities, such as defective navigation equipment, mooring lines, tackle, gear or lack of necessary equipment, which might impose hazards in connection with the handling, mooring, discharging or loading of vessels.

At the berths, vessels must be moored to the entire satisfaction of the Pilot and the terminal operators' Mooring Master.

The Pilot acts in an advisory capacity. The Master retains responsibility for the vessel at all times. In the event it becomes necessary to disregard the Pilot's advice in order to ensure the safety of the vessel, the Master must forward a full written report of the circumstances through the terminal for delivery to the Captain of the Port.

ANCHORAGE: Notice of Readiness can be tendered at anchorage. The suggested anchorage for El Palito Terminal is located 0.5 to 1 mile North or West of the seaward end of the pier. The area to the East of the pier is not recommended as an anchorage.

RESTRICTIONS: None. Vessels enter day or night and at any state of tide.

MAX. SIZE: East berth draft 38 ft. 6 in. West berth draft 40 ft. Length 730 ft.

BALLAST: Due to the exposed location of the oil piers, vessels are required to be ballasted to the following minimum drafts for safe manoeuvring to and from the berths:

Overall Length of Vessel	*Minimum Draft Required*
400–480 ft.	forward 9 ft., aft 17 ft.
481–700 ft.	forward 12 ft., aft 20 ft.
701–730 ft.	forward 14 ft., aft 23 ft.

A total capacity of 220,000 barrel slop pits and a 20 in. ballast line are available to receive all ballast.

Vessels with separate ballast tanks, lines and pumps may discharge ballast overside. Ballast for entering the harbour should be carried in the minimum number of tanks, and all other tanks stripped dry so as to minimise the time required for discharging ballast alonside berths.

All ships in ballast from abroad are charged for Consular Ballast Certificate.

HEALTH: No radio pratique. Health officers board vessel at berth.

RADIO: Puerto Cabello, Venezuela, Coastal Station call sign YVL, makes radio contact with all vessels "CQ" on 8722 kc. at the following hours: 1130, 1330, 1530, 1830, 2130, 0030, 0200 GMT. Also "CQ" on 17141 kc. at 1630 GMT and "CQ"on 4322 kc. at 0430 and 0630 GMT.

Vessels originally cleared for another port, and diverted at sea to El Palito, should radio C.V.P./Llanoven Puerto Cabello the following information as soon as the change of sailing orders are received:

Advise diverted.
Name and class of vessel.
Number of crew.
Flag of vessel.
Last port of call.
Port from which originally cleared.
Estimated time of arrival at pilot station.
Type and amount of cargo vessel will load.
Time required to discharge ballast.
Master's name in full as signature (John Jones, Master).

This information is required in order to make in advance special arrangements for inward clearance to avoid payment of fines.

VHF: Master should call El Palito Marine Terminal 3 hours before arrival on Channel 16.

TUGS: Use of tugs compulsory. Usually 2 tugs (1,600 h.p.) assist during docking and 1 (1,600 h.p.) during undocking.

BERTHING:

1. The use of both anchors is required for docking at both berths. It is considered prudent to have both anchors hove-out prior to entering the harbour in order to facilitate speedy release while mooring. The Pilot will advise whether the vessel is to be moored port or starboard side to the dock.

2. In the event the berth is required by another vessel, a vessel having completed loading may be required to vacate the berth promptly and proceed to anchorage to await cargo documents.

3. East Berth. Approach at very dead slow speed along a line parallel to a line formed by the East and the West berth at a distance from it equal to the distance of the North buoy. Drop the starboard anchor at the point of intersection of the ship's fore with a line formed by the two East shore range markers. Continue along same path at very dead slow speed until reaching with the ship's fore the East berth. Drop the port anchor. Allow the ship to drift into position alongside berth. This will be done by tying mooring lines as required by Pilot and with the help of the ship's engines.

4. West Berth. Approach at very dead slow speed along a line parallel to a line formed by the East and West berths and at a distance from it equal to the distance of the North buoy. Drop the port anchor at the point of intersection of the ship's fore with a line formed by the two West shore range markers. Continue along same path at very dead slow speed until reaching with the ship's fore the West berth. Drop the starboard anchor. Allow the ship to drift into position alongside berth. This will be done by tying mooring lines as required by the Pilot and with the help of the ship's engines.

5. General. Available hose connections, all 8 in., are as follows: 3 for Fuel oil, 1 for diesel products and 1 for leaded or unleaded gasolines. All dirty ballast to be pumped ashore through the fuel oil loading hoses.

LOADING:

1. *Cargo:* On completion of inward clearance, information regarding the number of hoses and loading rate will be given to the Master and Chief Officer. During ballast discharge supplementary information will be given to the Chief Officer. A 15 minute standby is required prior to finishing any grade.

2. *Contamination of Crude:* It has been established that one of the major causes of contamination of crude oil is the small amount of salt water remaining in the ship's tanks, pumps and ballast lines after discharging ballast. This small amount of salt water frequently results in costly damage and downtime to refining equipment and also presents many other problems. Therefore all tanks and lines must be pumped as dry as possible.

3. *Draining of Hoses:* Hoses are drained by gravity on all products and crude. Ship personnel must co-operate with terminal personnel in this operation to ensure complete draining of hoses into ship tanks and adequate drip cans must be placed to catch the remaining oil in line. Sawdust or equivalent must be on standby to clean up any oil leaks.

4. *Loading Rates:*

Commodity	*Available at berths*	*Size of line (in.)*	*Estimated max. barrels per hour*	*Hoses Pier 1 (in.)*	*Hoses Pier 2 (in.)*
Crude oil	1–2	30	27,000	3–8	2–8
Bunker C	1–2	24	17,500	3–8	2–8
Diesel	1–2	16	9,000	1–8	1–8
Unleaded gasoline	1–2	16	8,000	1–8	1–8
Leaded gasoline	1–2	16	8,000	1–8	1–8
Ship's bunkers	1–2	24/16/8	6,000	1–8	1–4
Lube	2	8		1–8	1–4

Loading rates will be reduced by the terminal when topping off tanks at the vessel's request.

5. *Scuppers:* Loading will not be started till all deck scuppers are properly sealed to the satisfaction of the terminal.

6. *Simultaneous Deballasting and Loading:* Vessels equipped with separate and completely segregated ballast tanks, and lines and pumps never used for oil may be permitted to discharge ballast and load simultaneously providing approval has been obtained from the terminal.

MEDICAL: Medical treatment and hospitalisation, if required, are available at the Seguros Sociales in Puerto Cabello. Several dentists are located in Puerto Cabello. Authorisation for any medical and/or dental treatment must be made by the Master. Transportation is available at the Terminal Office. If the patient does not speak Spanish an interpreter should accompany him.

FRESH WATER: Not available.

FUEL: Bunkers are available only for vessels loading cargo. Disputes as to quantity should be registered by signing the bunker receipt under protest and noting the ship's quantities thereon.

CUSTOMS: While the vessel is in port, Venezuelan National Guard officials are assigned on board to ensure compliance with Customs regulations. The law requires that meals be supplied to these officials during regular meal hours.

Venezuelan laws are strict in regard to contraband and Masters are requested to instruct their crews not to take cigarettes or other articles ashore.

Cigarettes in cartons, cigars, tobacco, souvenirs, gifts (particularly items of women's apparel), should be collected prior to arrival in port, listed with the items in the slop chest and placed in the custody of the Master for deposit in the slop chest which will be sealed for the duration of the vessel's stay in port.

CONSULS: French, Norwegian, Danish, Italian and Panama Consulates are represented in Puerto Cabello. There is no American Consulate. It is necessary for Masters of Panamanian flag vessels to visit the Panamanian Consulate at Puerto Cabello to present documents and receive dispatch as required by law. Regular office hours are from 0800 to 1200 hrs. and from 1400 to 1700 hrs. Mondays through Fridays; any dispatch issued outside of regular office hours is billed at double fees. Terminal Office will arrange transportation to Puerto Cabello upon request.

REPAIRS: Only emergency repairs of a minor nature can be made. Prices are very high.

REPATRIATION: The documents and personal effects of seamen left ashore for hospitalisation, repatriation or other reason, must be delivered to the Terminal Office before sailing. A letter from the Master is required advising the maximum amount of advances to the seaman and any other instructions concerning his repatriation. All expenses incurred by the seaman, including the cost of repatriation, are for the vessel's account. Venezuelan law at all times holds the Master, Agent or Owner responsible for any seaman left behind in Venezuela.

AIRPORT: Distant about 4 miles.

TIME: Local time is about GMT minus 4 hours.

SHORE LEAVE: Shore leave is permitted and a representative of the Captain of the Port boards on arrival and issues the required number of passes. Shore passes are to be collected prior to sailing and given to the National Guard watchmen on board.

Vessels are not permitted to sail until all crew members are on board, or special permission has been obtained to sail without a crew member.

REGULATIONS:

1. *Engines:* No engine repairs will be made while the ship is in dock. Engines are to be kept at standby at all times while the ship is in port.

2. *Rat-guards:* Vessels must use rat-guards on all mooring lines.

3. *Visitors:* All visitors to vessels are prohibited, without written permission in each case by the Port Captain or his assistant. Mooring Master, petroleum inspectors, dispatchers, and terminal employees handling hoses may board ship in performance of their duties.

4. *Pollution:* The laws of Venezuela are very strict in regard to the pollution of harbour and coastal waters by oil, and heavy fines are imposed for violations. No dirty ballast or oil is to be pumped or allowed to escape over the side. No engine-room or pump-room bilges may be pumped overboard. All pump-room sea suctions and overboard discharge valves must be secured prior to loading or discharging cargo. Loading must be conducted with the utmost care and vigilance so that errors or delays may not result in spills. All deck scuppers must be plugged tight before loading so that in the event of a spill pollution of the harbour may not result.

5. *Garbage;* No garbage is to be thrown over the side while the vessel is in port.

6. *Passengers:* Passengers will not be permitted to disembark unless in possession of the required visa and documents. To facilitate clearance, if passengers are carried, the Master should include this information in his ETA.

7. *Firearms:* Firearms on board any merchant vessel calling at Venezuelan ports must not exceed one per officer, nor can the ammunition exceed 18 cartridges per officer. All firearms and ammunition must be noted on the store list. Officers must not carry firearms while the vessel is in Venezuelan waters and these sidearms and ammunition should be collected and held in the Master's safe custody.

GENERAL:

1. *Bonded Stores:* No cigarettes or bonded stores are available at El Palito.

2. *Cash Advances:* Cash advances are available in Venezuelan Bolivares only and should be included in the vessel's ETA radio, to permit delivery on board at arrival.

3. *Charts:* No charts or sailing directions are available at El Palito.

4. *U.S.S. Club:* There is no U.S.S. Club available at El Palito or film exchange service.

5. *Inspection Petroleum Products:* Chas. Martin and Company and E. W. Saybolt, petroleum inspectors, are not available at El Palito. However, if specified in sufficient time, they may be obtained from Puerto La Cruz.

6. *Laundry:* Laundry facilities are available at El Palito.

7. *Lubricating Oil:* Certain types of Llanoven lube-oils only are available in small quantities. Requirements should be sent by radio with ETA.

8. *Mail:* Mail service posted from El Palito has been found to be fair.

9. *Provisions:* Provisions are available at El Palito.

10. *Radio and Radar:* No repairs made at El Palito.

11. *Gangways:* Gangways are provided by El Palito Terminal.

AGENT: See "Puerto Cabello".

GUANTA: 10.15 N. 63.35 W. (See Plan Book)

SHIPMASTER'S REPORT: 1978

LOCATION: 10° 15′ N. 64° 35.5′ W. About 5 miles East of Puerto La Cruz.

DOCUMENTS:

6 Crew Lists.
6 Passenger Lists (or negative).
6 Ship's Stores Lists.
6 Crew Personal Effects Lists (well detailed).
1 Declaration of Health.
Clearance from last port.
Cargo Manifests visaed by Venezuelan Consul at loading ports.
Full set of Manifests and B/Ls.

Entry Formalities; Normally carried out after docking unless there are no berths available; then vessel can be cleared at anchorage in Bahia Pozuelos, during daytime. At night only in case of emergency.

Accommodation ladder must be rigged.

Hours of entry: From 0700 till 1100 hrs. and from 1300 till 1700 hrs. Overtime outside these hours.

APPROACHES/PILOTAGE: A vessel bound for Guanta has to enter Bahia Pozuelos as she must first call at Puerto La Cruz to embark a Pilot. The anchorage area for waiting berth turn is also in Bahia Pozuelos. This anchorage is in depths of 48 to 80 ft. and is well protected from swell by surrounding islands. No size limitation.

Bahia Pozuelos is the anchorage and Pilot embarking area for 3 ports: Puerto La Cruz, Guanta and Pertigalete.

The use of government Pilot is compulsory for all vessels docking or undocking. ETA: 48 and 24 hours in advance via the vessel's Agent.

Pilot boarding hours: From 0530 till 1700 hrs. every day. Vessel cannot dock after sunset. Sailing may be arranged at any time.

HEALTH: All vessels boarded by Port Doctor. No automatic pratique.

RADIO: Curacao Radio PJC. No local station.

VHF: All Agencies maintain radio watch on Channel 16 during office hours. Tugs and launches also equipped with VHF (call: "Ramrey").

TUGS: 3 tugs available: 1 of 1,700 h.p. and 2 of 1,200 h.p. All privately owned. Sometimes vessels bound for Guanta or Pertigalete have to wait for 2 or 3 hours as these private tugs have contracts with oil companies in Puerto La Cruz and are available only when no tanker is docking or undocking. Tug's lines used. Normally tugs join the vessel inside Guanta Bay.

BERTHING: One concrete pier on piles, 763 ft. in length where vessels normally dock starboard side to. The apron is 20 ft. wide in centre, 42 ft. at ends.

One modern concrete pier on piles, 1,056 ft. in length where vessels normally dock port side to. The apron is 115 ft. wide in centre and 85 ft. at ends. The piers are well fendered with rubber hoses and used tires.

Height of piers above HW: 10 ft. Mean tidal range: 1 ft. 6 in. Max. draft alongside small pier: 23 ft. 08 in. Min. draft alongside long pier: 26 ft. 08 in. Depths varies from a min. of 27 ft. to a max. of 34 ft. at the Western end of the long pier.

CARGO HANDLING FACILITIES: All cargo normally discharged by vessel's own gear, directly on to truck or trolleys. The piers are not connected to the railroad. No floating crane.

The following mobile cranes are available in the port area: 1 crane max. 120 tons; 1 crane max. 30 tons, with telescopic extension boom, max. 60 ft.; 2 small cranes max. 6 tons with a boom length of 30 ft.

Forklifts: 15 forklifts capacity 3.5 tons; weight 5.2 tons with fixed counterweight. To use these forklifts on board, the hoisting gear should lift over 6 tons.

2 forklifts capacity 5 tons, weight 12 tons; 1 forklift capacity 20 tons, weight 25 tons, specially for containers.

Flatbed trolleys: 30 trolleys capacity 8 tons; 1 trolley capacity 70 tons.

No lighters available.

All discharging gear normally supplied by Agency. For heavy lifts, it is recommended to have special slings on board.

BULK CARGO FACILITIES: On the Eastern side of the Guanta Bay, there is a berth for loading coal by means of a fixed shoot. Depth alongside 30 ft.

Grain Cargo: Receivers supply suction machines. There are 2 machines available, capacity 1,000 tons per machine during 24 hours. Grain vessels work round the clock.

Liquid Cargo: Sometimes tallow and liquefied gas are handled. Discharged by vessel's pump into tank trucks. Hoses normally supplied by vessel.

CONTAINER HANDLING FACILITIES: No container berth. No crane. 1 forklift capacity 20 tons. There is a small container stacking area.

STEVEDORES: Normal working hours: 0700–1100 hrs. 1300–1700 hrs. (Monday to Friday); 0700–1100 hrs. (Saturdays).

Overtime: Monday to Friday, 1800–2300 hrs. (night shift); Saturday, 1300–1700 hrs.

Normally port does not work after 1700 hrs. on Saturdays or Sundays.

Ordering of gangs: For 0700 hrs. requested previous day before 1500 hrs. For 0900 hrs. requested same day at 0700 hrs.

Overtime rates: 50% for the night shift (Monday to Friday); 100% for Saturday afternoon shift.

The gangs consist of 12 longshoremen and 12 stevedores, including 2 winchmen, 1 signalman and 1 checker.

Capable supervision only available from Agency.

Rigging or cleaning gangs are available.

MEDICAL: Private hospitals at Puerto La Cruz. Private doctors generally do not visit ships. If medical attention is required on board, the Port Doctor will attend patient, unless he authorizes another doctor to make the visit.

In case of emergency, when the vessel is anchored in Bahia Pozuelos, a launch can be arranged to pick up the sick crew member.

FRESH WATER: Available at 5 Bolivares per ton at the main pier only. Hoses supplied by ship. Rate: about 5 t.p.h.

Presently there is no water available at Berth No. 3 (Western end of pier).

DENSITY: Salt water all the year round.

FUEL: No Bunker "C".

Diesel: Delivered by trucks; arrangement must be made at least 24 hours in advance.

Gas Oil: Delivered by trucks under previous arrangement.

GARBAGE DISPOSAL: No facilities.

CONSULS: See "Puerto La Cruz".

REPAIRS: Only minor engine or electric motors can be repaired.

GANGWAY/DECK WATCHMEN: Not available. No shore gangway available.

DRY DOCK: Not available.

SURVEYORS: None.

CUSTOMS ALLOWANCE: 200 cigarettes and one open bottle spirits.

REPATRIATION: Can be arranged. No special requirements.

IDENTIFICATION CARDS: Passes for shore leave are issued by officials of the Port Captain's Office, when boarding the vessel for clearance. These passes should be filled out on board. They are valid for the duration of the vessel's stay in port only and have to be returned before sailing.

In order to comply with Immigration Regulations, crew should be carefully checked before departure and any missing seaman reported to the Agent. The same applies to passengers in transit.

AIRPORT: At Barcelona, about 15 miles by road. 3 flights daily to Caracas.

TIME: 4 hours slow of GMT, all the year round.

HOLIDAYS: New Year's Day, Holy Thursday, Good Friday, Holy Saturday, April 19th, May 1st, June 24th, July 5th, July 24th, October 12th, November 24th, Christmas. No labour available on these days.

TELEPHONES: No facilities at Guanta. Private calls can be made from the central office at Puerto La Cruz (5 miles) during the following hours: 0700–2100. Long distance calls dispatched quicker from the Hotel Melia at Puerto La Cruz.

SHORE LEAVE: From a ship anchored in Bahia Pozuelos: Allowed if the vessel has been cleared and if every crew member has shore pass. One private launch available but very expensive.

From Guanta berths: Allowed with shore passes.

DELAYS: Presently, Guanta is somewhat congested and the waiting time varies from a few days to 15 days, especially during the rainy season.

GENERAL: Venezuelan regulations strictly prohibit the pumping overboard of dirty ballast or throwing garbage or dunnage in territorial waters. Heavy fines are imposed for pollution of waters and sometimes fishermen are quick to report any infringement.

Berthing Turn: On the basis "first come, first served" but Venezuelan vessels have some priority.

Supplies and laundry: Several private firms based at Pto La Cruz. Nearly all kinds of fresh provisions are available.

Laundry service available; may be completed in 8 to 10 hours.

General: Guanta is a natural harbour surrounded by mountains which protect the bay completely in bad weather. The port has never been closed for bad weather.

Venezuelan Flag: Upon arrival at Pozuelos Bay ship should display the flag from the foremast at all times. When anchored or docked, the flag should be displayed only between sunrise and sunset.

Warehouses and Cargo Sheds: No transit cargo shed. No refrigerated storage available.

There are 5 warehouses with a total floor space of 75,000 sq.ft.

Open Space: A total of 5.7 acres, mostly covered with asphalt or concrete.

Weather: The rainy season starts in mid-May and ends in November or December. During the rainy season it is usually calm in the early hours of the day followed before mid-day by light Westerly or variable breezes. In the afternoon the breezes change to north-easterly at about 12 knots until midnight. During the dry season the cycle is similar but the N.E'ly wind may reach 25 knots. This can prevent all communications between anchored vessels and the shore.

AUTHORITY: "INP" Instituto Nacional de Puertos.

SHIPMASTER'S REPORT: 1975

LOCATION: 10° 14.7′ N., 64° 35.5′ W.

Guanta is located in the Bay of Guanta. It is a well protected port against currents and winds.

The port is entered between 2 well lighted islets.

DOCUMENTS:

Maritime Declaration of Health (together with inoculation list of crew).

10 Passenger– (or non-passenger) Lists.

10 Transit passenger– (or non-transit passenger) Lists.

10 Crew Lists.

4 Personal Effects Lists. (new clothes, etc., to be mentioned).

4 Ship's Stores Manifests.

Clearance last Port.

PILOTAGE: Government pilotage is compulsory. Pilot is embarked and disembarked near the sea buoy of Puerto La Cruz, in position: 10° 15.5′ N., 64° 41′ W.

ANCHORAGE: On the Pto La Cruz roads.

RESTRICTIONS: Entering: In daylight hours only: 0600–1800.

Sailing: Day and night.

TUGS: One powerful tug available, compulsory to use when ship's length more than 90 m.

BERTHING: *New Pier:* Length 322 m. *Old Pier:* Length 233 m.

Water Depth: According to Pilots information: *Old Pier:* 29 ft. *New Pier:* 34 ft.

STEVEDORES: *Working Times:* Mon. to Friday: 0700–1100 hrs., 1300–1700 hrs., 1800–2300 hrs. Saturday: 0700–1100 hrs., 1300–1700 hrs. Sunday: No work is done.

Gangs have to be ordered by 1500 hrs. the day before required.

FRESH WATER: Ships can replenish their fresh water tanks without charge (Included in port charges). Own hoses to be used.

OPENING/CLOSING HATCHES: Opening/Closing hatches, setting derricks: Special Rigger gangs take care of this. It is absolutely forbidden for ship's crew to touch these kind of jobs.

GENERAL: *Waste Water:* Special care should be taken to prevent waste water, from sanitary– or engine-room systems fouling the jetty. Heavy fines are made in case this happens and a special shore gang might be ordered to clean same.

Customs: 2 Customs officers have to be provided with food.

OPERATORS: Servicio Portuario de Guanta.

LA GUAIRA: 10.36 N. 66.56 W. **(See Plan Book)**

DOCUMENTS:

Sealed envelopes for Customs.

Visaed B/L and Sobordos not in envelopes.

Consular Despatch for all Venezuelan ports.

Despatch from last Venezuelan port, if any, or

Zarpe from last foreign port, if arriving directly from abroad.

Fumigation Certificate.

Vaccination Certificates of Crew.

Landing Cards for Crew and Passengers.

6 Store Lists (with arms and narcotics).

6 Lists of Personal Effects.
10 Crew Lists.
10 Lists of Passengers for La Guaira, or negative Passenger List.
10 Lists of Passengers in Transit.
2 Sets of B/L not visaed.
4 Sobordos not visaed.
14 Tally Books.

PILOTAGE: Compulsory and vessels have to wait for Pilot in the pilotage zone N.W. of the port entrance.

MAX. SIZE: Also see "Developments."

Berth	*Length* (m.)	*Depth* (ft.)	*Remarks*
1	116	30	
2	158	30	
3	158	30	Grain Berth
3A	158	30	Grain Berth
4	150	13	
5	168	27	
6	168	30	
7	148	30	
8	148	27	
9	130	11	
10	168	27	
11	144	30	
12	144	30	
13	144	30	
14	144	30	
15	168	28	
16	168	28	Passenger Berth
17	144	30	Passenger Berth
18	168	30	Passenger Berth
19	168	28	Passenger Berth
20	160	12	Fishing Berth
21	290	30	Warship Berth

RADIO: In order to enable Agents arrange for quick entry and berthing, Masters should give their ETA message at following intervals, via Curacao Radio (ITT): 72, 48 and 24 hours prior to arrival, indicating in the 48-hour message, the quantity of parcels (or tonnage if bulk cargo) per hatch. This is imperative for applying for the necessary personnel of the National Port Services. Also, draft, passengers, requirements for bunkers, fresh water, provisions, repairs, medical assistance, etc. This telegram the Master to sign with his full name.

TUGS: The use of tugboats within the port is compulsory, both for entering and leaving port, as well as for manoeuvres in the port basin. Ships longer than 139 m. must be assisted by 2 tugboats.

BERTHING: Normally a minimum of 19 ocean-going vessels can berth at a time. Berths No. 1, 2 and 3 are along the breakwater pier East-West, parallel to the coast.

Within the port is a finger pier, parallel to the breakwater pier, with 2 Customs warehouses alongside, with berths North and South, 2 each. The main pier is parallel to the coastline, East-West, with berths Nos. 10, 11, 12, 13, 14 and 15,, along which piers there is ample Customs warehouse space, including outdoor space on the roofs as well as ample uncovered storage area.

The Passenger Terminal is on a finger pier, in direction North-East with its land end in the corner of berth No. 15. There are 2 berths each side, namely Nos. 16 and 17 in the inner basin and Nos. 18 and 19 in the outer basin.

Passenger vessels have priority for berthing and they have to leave port within 24 hours.

Also see "Developments".

LOADING/DISCHARGING: Cargo is discharged into railcars alongside the piers, or directly into the transport means of the Importer and vice versa when loading. The latter, however, applies only for bulk cargo or considerable one-type commodity.

If electric shore cranes are used, the same procedure applies unless the cargo is to be stored outdoors on the roof of the warehouses. Piers Nos. 4 and 9 have no rails alongside, so the cargo is discharged on the pier, wherefrom it is immediately taken away by two-boys, fork-lifts and/or other mechanical equipment supplied by the National Port Services as per kind of cargo. The use of such equipment is included in the handling fee per weight. There are 2 grain towers on berths 3 and 3A leading via conveyor belts to storage silos of 12,000 ton capacity. Average daily discharge rate 2,000 tons approximately.

STEVEDORES: Supplied exclusively by the governmental National Port Services at costs per weight of cargo in accordance with governmental decrees.

The Port Agent applies for the necessary number of gangs per ship. Each gang consists of 11 stevedoremen (estiba) and 11 longshoremen (caleta).

Switching of gangs from one hatch to another is not permitted.

There are no longshoremen costs for cargo handled during straight time, but only for that handled during overtime.

(a) *Straight time*
Monday–Friday 0700–1100 hrs.
1230–1630 hrs.
Saturday 0700–1200 hrs.

(b) *Overtime*
Monday–Friday 1800–2300 hrs.

(c) *Saturday afternoon* work is not permitted, but if a vessel could terminate operation and sail within a maximum of 3 additional working hours, a special permit would be granted by Customs and Port Authorities. In such a case, the additional working hours are considered as overtime.

(d) *Work on Sunday* is not permitted except for passenger vessels (officially those carrying 60 passengers, but exceptionally vessels with less passengers might occasionally obtain same consideration by authorities).

EQUIPMENT:

(a) *Electric Shore Cranes:* Berths 10 to 15 have 14 electric shore cranes on rails, of 6 tons capacity each. The National Port Services allow 2×6-ton cranes to lift pieces up to 9 tons weight. The arms of the cranes reach the roofing of the warehouses. Use of shore cranes is not compulsory, unless the Technical Board of the National Port Services rules to use them. There are also 13×8-ton mobile cranes. Other piers have no shore cranes.

(b) *Diesel-Driven Rolling Cranes:* There are a considerable number of these cranes which can lift heavy pieces of about 17 tons.

(c) *Floating Cranes:* Not available.

(d) Special lumber carriers of about 20 tons capacity.

(e) Tow trucks, fork-lifts, trucks and trailers up to 10 tons capacity.

OPENING/CLOSING HATCHES: Not performed by the National Port Services but by either the ship's crew, or the assistance labour of the Agent.

FRESH WATER: Available through pipe-line on the pier, day or night, by water trucks of up to 10 tons capacity in day time only.

OFFICIALS: Once the vessel is anchored at La Guaira, Representatives of Customs, Port Captain, National Guard, Health Service, Immigration and Agency board the vessel.

DEVELOPMENTS: The following is an English translation of a Notice to Mariners supplied to Shipping Guides Ltd. in Spanish.

Captaincy of the Port of La Guaira
Notice to Mariners
AGSI 5/78

Mariners, shipowners and ships' Agents in general are informed that by reason of the extension of the thermo-electric station for electricity supply to Caracas located at Arrecifes, a tanker terminal has been constructed which will come into service this year, and the indications are as follows:

This discharge terminal incorporates a system of buoys as its floating part.

Buoy No.	*Name*	*Latitude*	*Longitude*
1	A–2	10° 35′ 25.244″ N.	67° 05′ 04.784″ W.
2	A–3	10° 35′ 20.389″ N.	67° 05′ 16.525″ W.
3	A–4	10° 35′ 25.985″ N.	67° 05′ 18.929″ W.
4	A–5	10° 35′ 25.432″ N.	67° 05′ 11.639″ W.
5	A–1	10° 35′ 32.533″ N.	67° 05′ 06.004″ W.

All buoys with the exception of the hoisting buoy have an indicator light with the following characteristics:

Name	*Colour*	*Range*	*Period*	*Flash*	*Eclipse*
A–1	White	5 miles	6.0 sec.	3.0 sec.	3.0 sec.
A–2	Red	3 miles	4.0 sec.	1.0 sec.	3.0 sec.
A–3	Red	3 miles	4.0 sec.	0.5 sec.	3.5 sec.
A–4	Red	3 miles	4.0 sec.	1.5 sec.	2.5 sec.
A–5	Red	5 miles	3.0 sec.	0.5 sec.	2.5 sec.

Other Developments: It has been reported that the second of 7 new berths is in operation. Length of dock 200 m. Max. LOA 960 ft. Max. draft 33 ft. The 7 berth project is expected to be completed in March, 1979, when a total length of 700 m. will be available.

AGENTS: Head Office (Control), Management/Brokers, Chartering and Tramp Agents, Victor H. Selinger S.A., PO Box 1632, Caracas 101. Cables "Selvic" or "Seltank" Tel. (02) 81.02.71, Telex: 21402, 21934, 22859, 21631. Local Office: PO Box 304, La Guaira. Tel. (031) 27092, 27566, 27340. Cables: "Selvic LaGuaira" or "Seltank LaGuaira". Telex: 31143.

MARACAIBO LAKE (See Plan Book)

Including, Section A – BAJO GRANDE
Section B – LA ESTACADA
Section C – LA SALINA
Section D – MARACAIBO
Section E – EL TABLAZO AND PUERTO MIRANDA
Section F – PUNTA DE PALMAS
Section G – SAN LORENZO

GENERAL: The following "Depth Bulletin", dated June 1978, was received from a Shipmaster in February 1979.

REPUBLIC OF VENEZUELA
NATIONAL INSTITUTE OF CANALIZATIONS
ZULIA ZONE

Depth Bulletin No. BP–6–78 Dated: 13–06–78

The following data represents the latest information reported and refer to the date shown for each section of the channel. Depths are expressed in metres and are related to the same level of the local Navigation Charts 1001, 1002, 1003 and 1004 of the M.M.M. Mean Monthly Lowest Low Water.

The controlling depths refer to the centre area of the channel demarked by parallel lines on either side at a distance of 60 m. in the outer channel and 45 m. in the rest of the channel. The Puerto

Miranda channel is of 30 m. The theoretical position of the buoys in the aforementioned navigation charts are located at a distance of 30 m. from the edge of the channel.

Main Channel

Channel	*From*	*To*	*Date*	*Depth (m.)*	*Remarks*
Outer Section	B–1	B–28	19-05-78	12.8	
Inner Section	B-28	T-56	10-05-78	12.8	
SOUTH PROLONGATION	T–56	B–59	28-04-78	12.8	Entrance to Puerto Miranda (B–59)
	B–59	B–66	26-04-78	12.8	Entrance to La Estacada (B–66)
	B–66	B–76	10-03-78	12.8	Entrance to the Port of Maracaibo
	B–76	B–86	24-05-78	13.1	Entrance to Bajo Grande (B–86)
	B–86	B–96 Parallel	07-02-78	13.1	Entrance to La Ensenada
	B–96	10° 22′ N	14-02-78	12.8	Entrance to La Salina Channel (B–97 and 10° 22′ N)
	Parallel 10° 22′ N	M–1	14-02-78	13.1	Entrance to Lake Main Channel (M–1 and M–1).
Puerto Miranda Channel		AP–2	11-05-78	11.6	

Signed............................ *Signed*..................................

The Port Captain — The Director N.I. of Can. Zulia Zone

(N.B. Certain information common to all Vessels entering Maracaibo Lake is given below. For specific details of ports/terminals within the Lake, see relative Section as indicated above).

FLAG: Local authorities require that the Venezuelan ensign be flown at vessel's masthead, from the time of entering the outer channel until clear of the outer channel outbound.

DOCUMENTS: *(a) Inward Clearance for Scheduled Vessels:* Vessels arriving in ballast or with cargo in transit require following documents:

1 copy Sailing Permit from Last Port.
2 copies – 1 visaed Ballast Certificate.
1 or more letters Consular Mail (in sealed envelope).
4 copies – 2 visaed Passenger Lists.
4 copies – 2 visaed Baggage Lists.
4 copies – 2 visaed List of Passengers in Transit.
4 copies List of Slop Chest.
4 copies List of Personal Effects.
4 copies – 2 visaed Store Lists.
5 copies Crew Lists.

Vessels arriving with cargo should have, in addition to the foregoing:

4 copies – 2 visaed Sobordos (Venezuelan Inward Manifests).
6 copies – 2 visaed Bill of Lading.
2 copies visaed Inward Manifests.

In absence of a Venezuelan Consul at the last port, clearance documents should be signed by consul of a friendly nation, one of the Port Authorities, Notary Public, the Chamber of Commerce or by two well-known firms.

(b) Inward Clearance for Diverted Vessels: Vessels diverted to Maracaibo Lake Ports to load cargo, should submit all documents indicated in 1 through 10 above, except consular mail, which they will not have.

Vessels diverted at sea to Maracaibo Lake Ports which do not have a Venezuelan clearance on board, must advise loading port via radio to arrival, the name of vessel, Master's name, vessel's flag, Venezuelan net tonnage (if available, if not, the registered net tonnage), last port of call, destination port for which originally cleared, ETA San Carlos Pilot station and grade and quantity of cargo to be lifted. This information is required in order that Inward Clearance may be arranged with government officials in ample time prior to vessel's arrival. Also 3 copies of the diversion telegram received by vessel and signed by Master, together with copies of those documents listed under *(a)* should be presented to the Port Authorities upon arrival at Maracaibo. In the absence of this information, or of presentation of each of these documents to the Port Authorities the vessel will be subject to a fine. Please note, that the documents covered under *(a)* have to be presented upon arrival, regardless, if the vessel is not arriving with consular clearance or arriving after being diverted at sea.

(c) In Maracaibo 2 clearances from Custom's authorities are needed: One for proceeding from Maracaibo to loading berth, and another after loading for proceeding from Maracaibo to destination. For this reason Custom Dispatch charges may be incurred twice.

(d) American Crew List. All non-American vessels loading for a U.S.A. port should have the American Crew List ready on arrival in Maracaibo to be visaed by the American Consulate in Maracaibo and placed aboard ship before departure. The crew list should be prepared on Immigration and Naturalization Service form No. I.–418 (Crew List Manifest) and should contain 2 sections:

Section 1 should list those crew members who are American or who possess individual visa documentation to the United States.

Section 2 should list, in the alphabetical order of their last names, those alien crew men who lack United States visa documentation and therefore require inclusion in the visa of the crew list.

Only one name may be placed on each line of the crew list. Two names should not be placed in the space of one line, nor should a full line between two names be left vacant. All copies of the crew list presented must be legible. Occasionally the names of the crew men included on the carbon copies of some crew lists presented at the consulate are blurred beyond recognition.

The information requested under columns 1, 2 and 3 should be filled in completely. Column 1 should always contain the complete first name and middle initial of the crew man. Column 2 should show the nationality of each crew member and the number of his travel Document. Column 3 should always include the name of the port where the crew man was shipped, not simply the country.

At the time of vessel's first application for a crew list, the crew list must be presented in four copies: Original and 1 copy should contain only information requested under Columns 1, 2 and 3. 2 copies must include following information of those crew men to be included on crew list visa. Column 4 should list date, city and country of each crew man's birth. Column 5 should show place of issuance of seaman's travel document and name of Government which issued travel document. (It is not necessary to list date of issuance of travel document).

Below is a sample line correctly entered on the Master crew list.

(1)	(2)	(3)	(4)	(5)
Bello, Tomas E.	Z.23455 Venezuelan	Maracaibo Venezuela	December 8, 33 Caracas, Venez.	Cabimas, Venez

Upon subsequent crew list applications by same vessel within same year, the crew list need be presented in duplicate only, and the information in Columns 4 and 5 need be provided only concerning any new crew members who require visa documentation. When twelve months have elapsed since presentation of Original crew list, a crew list should again be prepared in 4 copies and should contain all the information required in columns 1–5. Such a master crew list is required after each 12 months period.

APPROACHES: Also see "General" above. The channels leading to the Lake of Maracaibo are called the Outer Channel, the Inner Channel and the Lake Channel. The controlling depths of the Outer Channel, Inner Channel and the channel Southward to buoys M1 and M2 are normally 45 ft. At certain times the controlling depth may be less. At such times suitable notices are published advising mariners of these temporary reductions of controlling depth.

Outer Channel. The Outer Channel starts at the E.M. Buoy in position 11° 13′ 47″ North and 71° 33′ 31″ West. The light characteristics of E.M. Buoy are: flashing white every 5 seconds, visibility approximately 5 miles. The distance from E.M. buoy to the Southern end of the Outer Channel, marked by buoys B–27 and B–28, is approximately 15.75 miles. The channel is 1,000 ft. wide and has a normal controlling depth of 42 ft. minimum monthly observed lowest water (MMOLW) with tidal range varying about 2 ft. 3 in. This depth is maintained by periodical dredging. Tankers are required to have a keel clearance of at least 2 ft. and dry-cargo vessels a keel clearance of at least 3 ft. Vessels navigating the channel at the maximum allowable draft are confined from 2 hours before to 2 hours after high water. There are no turns in the channel and the course is 189°.

There is a breakwater 0.5 mile East of, and parallel to, the Outer Channel and extending 1.6 miles Northward from the North side of Zapara Island. The end of this breakwater is marked with a skeleton steel tower with a light 27 ft. above sea-level. Light characteristics – flashing white light every 8 seconds; visibility about 3 miles.

On Zapara Island there is a skeleton iron tower with a height of 136 ft. above sea-level.

Cross currents are sometimes encountered near Zapara, San Carlos and Pescadero Islands, especially at low water when the cross currents are strong. Overtaking at these points should be avoided.

There is one anchorage zone in the Outer Channel which is a trapezoid on the port side when navigating inbound near the Buoys B–14, B–15, B–16 and B–18. All buoys in the Outer Channel are equipped with radar reflectors.

Caution: Masters are warned to keep adequate speed in the Outer Channel even when embarking the Pilot as strong cross currents are encountered near San Carlos and Zapara Island. Pilot boats are fast and fitted with a flying bridge.

Inner Channel. The Inner Channel continues on the same course as the Outer Channel for about 10 miles, whereafter the direction changes to 150°. Entire length of the Inner Channel is about 12 miles.

The beginning of the Inner Dredged Channel is marked by buoys B–29 and B–30. Channel is marked by beacons, and terminates at beacons T–55 and T–56. The channel is 800 ft. wide and the normal controlling depth is 43 ft. MMOLW with tidal range varying from 1.5 ft. to 2.5 ft.

The channel from beacons T–56 to Maracaibo Harbour is a dredged channel, the end of which is marked by buoys Nos. B–73 and B–74.

About 0.2 mile South of buoys B–29 and B–30, there are located 2 towers – 1 on each side of the channel, and about 1 mile further South are 2 more towers. These 4 towers are marked E–31 and E–32 (North) and E–33 and E–34 (South). Towers No. E–31 and E–32 are of single steel pipe construction on a concrete pile base. Towers

No. E–33 and E–34 are of skeleton steel construction (former oil-well derricks) each mounted on 4 concrete piles. The characteristics of these towers are:

	Height above water (LWS)	
Tower No.	*Light*	*Light*
E–31	43′	Green – Fl.
E–32	43′	Red – Fl.
E–33	123′	Green – Fl.
E–34	128′	Red – Fl.

Vessels are not allowed to overtake each other in the Inner Channel between buoys B–29 and B–30 and light beacons T–25 and T–26. Vessels may overtake each other in the Inner Channel between light beacons T–39 and T–40 after having exchanged prescribed signals with the vessels to be passed. This manoeuvre is, of course, allowed only if conditions are favourable and no vessel navigating in the opposite direction is in sight.

Lake Channel. The channel starting at light beacons T–39 and T–40 and leading to Maracaibo Roads is called the Lake Channel. This is a natural channel 3,000 ft. wide and 11 miles long.

The Main Channel through Maracaibo Lake is approximately 83 miles long, not less than 244 m. wide and with a greater depth than the outer channels.

The access channels to the various ports and terminals branch off from the main channel as described under Section for each port.

CHANNEL NAVIGATION:

(a) Inbound vessels leave to starboard side the buoys and beacons marked with even numbers and to port side the buoys and beacons marked with odd numbers.

(b) Outbound vessels shall leave to port side the buoys and beacons marked with even numbers and to starboard side the buoys and beacons marked with odd numbers.

(c) Vessels should pass as close as possible to the channel's edge on starboard side. Loaded vessels have preference.

(d) Approaching vessels are to reduce speed in order to minimise the suction force of the displacing waters.

(e) Vessels must maintain a distance of 5 ship's lengths by day and 8 ship's lengths by night from other vessels navigating in the same direction.

(f) No vessel should start to manoeuvre to overtake another vessel before having received clearly the affirmative signal from the ship to be passed.

(g) A grounded vessel is not allowed to start any manoeuvre when another vessel is passing.

(h) Dredgers are frequently at work in the channels and caution should be exercised in passing them. Signals used by the dredgers are as follows:

Daytime

Black cylinder hoisted on side of yardarm: You can overtake me on the side on which the cylinder is shown.

Two black balls over the bridge: The channel is blocked.

Night

Green light on side of yardarm (a white light on mast-head helps to show on which side the green light is placed): You can overtake me on the side on which the green light is shown.

2 red lights over the bridge: The channel is blocked.

The tidal range is 4 ft. at neaps.

(i) Maximum speed for vessels navigating in lake channels has been limited to 10 knots. Masters should exercise the utmost care in complying with this regulation as heavy fines may be imposed to offending vessels.

PILOTAGE: (N.B. Maracaibo Pilotage Regulations require that inbound tankers, in ballast, while crossing the Bar, shall not have greater than 8 ft. difference between fore and aft draft. The Government Pilot will not take the vessel if this requirement is not met, unless he is satisfied that the actual draft of the vessel will permit safe navigation through the Outer and Inner Channels.

Every Master of a vessel navigating in Lake Maracaibo who desires to enter the main ship channel in Pilotage Zones No. 1 or No. 2 must first ensure that said Channel is free of traffic.

The limits of the Main Ship Channel in Pilotage Zone No. 1 are from buoys B1/B2 located at the entrance to the Outer Bar Channel and buoys B73/B74, of the city of Maracaibo. Pilotage Zone No. 2 begins approximately 1 mile below Maracaibo and extends Southward to lightfloats M36/M37. All other channels are considered as access channels to their respective port zones and subject to special local rules. Every vessel navigating to or from any port in Lake Maracaibo must follow the prescribed routes through the main and access channels leading to or from such ports, (unless special permission has been granted to do otherwise).

(a) Pilots are employees of the Venezuelan Government and act in an advisory capacity; the Master retains responsibility for the ship at all times. In the event it becomes necessary to disregard the Pilot's instructions in order to ensure the safety of the ship, the Master must prepare a full written report of the circumstances, for delivery to the Captain of the port.

(b) Inbound vessels have the option at present to embark government Pilot at the following areas:

(i) In the channel off San Carlos Pilot Station between buoys B–24 and B–26.

(ii) Anchorage area approximately 5.5 miles N.E. of Pilot station, San Carlos Island. Position N. 11° 04′ 22″, W. 71° 33′ 48″ East of buoy B–17. This area is demarcated with green light buoy equipment with radar reflector.

(iii) At the E.M. Buoy.

(c) The Port Captaincy of Maracaibo is unable to guarantee embarking or disembarking Pilots at the E.M. buoy or at anchorage area position. For this reason Masters should communicate with San Carlos Pilot station for necessary instructions as to where to pick up Pilot, who usually embarks between buoys B–24 and B–26. The communication system between San Carlos Pilot station and vessels will be by Morse lamp and radio-telephone. The stand-by frequency at San Carlos is 2182 kc/s. Other existing frequencies are 2120 and 2080 kc/s.; 156.6 and 156.8 mc/s. Each Pilot launch has a radio-telephone with 2182 kc/s. frequency. The launch that leaves San Carlos Pilot station with Pilot for ship, takes approximately 20 to 30 minutes to cover distance, and distance between Buoys and San Carlos is approximately 6 miles or 10 kms.

(d) Pilot Permit to navigate the Outer Channel without aid of a government Pilot will be granted to those Masters who desire to obtain same. In order to fill the application required, a blank sealed paper and 3 copies should be signed by Master on arrival. Copy of this solicitude duly endorsed by port Captain of Maracaibo, will serve the Master as temporary permit until the official one has been received. Masters in possession of permits to cross the Outer Channel without a Pilot, have the option to enter channel either at the E.M. buoy or between any other buoy, taking into consideration the heavy traffic of the channel. Government pilotage through the inner channel is compulsory at all times.

(e) Outbound vessels will receive Pilot in Maracaibo, who will Pilot vessel up to San Carlos area approximately between Towers E–31 and E–33, where he will disembark. The Port Captain of Maracaibo has instructed that all Captains should always in ample time identify themselves with the San Carlos Pilot station by radio-telephone regardless of time of day. While inbound – between buoys B–17 and B–19 and sailing outbound – between markers T–42 and T–40. These instructions are obligatory and are required in order for the Pilot service to be aware, at any moment, of any emergencies which may arise, and also to avoid, especially during the night, the launch departing with an official Pilot aboard believing that the ship in sight needs his services, in which case, even though the launch or Pilot services are not rendered, the same will be charged to the company owning the ship, or its representative.

TONNAGE: Venezuelan Port Authorities base part of their pilotage charges on the size of the vessel, i.e.:

(a) On Registered Net Tonnage. Venezuela will accept the tonnage of ships registered in countries with which they have a reciprocal tonnage agreement. As of this date, such countries are:

Norway
England
France
Sweden
Ireland
Germany
U.S.A.
Denmark
Holland
Portugal

(b) On Venezuelan Nett Tonnage. Ships not registered in countries listed above, when calling at Venezuelan ports for the first time, must be measured for Venezuelan tonnage by the Captain of the Port. It is the usual practice to take ashore the ship's Panama Canal or Suez Canal Certificate, which is used as a basis for recalculating tonnage under the Venezuelan regulations, and return it before sailing. The Venezuelan admeasurement certificate, when later issued, is forwarded to the Owners. A fee is charged for this certificate, which is payable only on the ship's first call.

(c) In practice, the procedure for stating the tonnage of all ships entering the Lake of Maracaibo is as follows: The inward Pilot boarding the ship presents Master a form on which among others the Master should fill in the tonnage of ship. Pilotage charges are based on this tonnage given by the Master. Master's attention is drawn to the fact that the Venezuelan nett tonnage is usually higher than the International nett tonnage. Care should be taken if an old Venezuelan nett tonnage certificate is on board, because the country in which the ship is registered might later have signed the reciprocal tonnage agreement with Venezuela. If the pilotage charges are made on basis of a higher tonnage than the one that should be applied, it is later very difficult, if not impossible, to get a refund.

CUSTOMS: *(a) Customs Watch.* While vessel is in port, Venezuelan National Guard Officials are assigned on board to ensure compliance with customs regulations. The Law requires meals be supplied to these officials during regular meal hours. Masters are requested to give them the privilege of eating in officers' messroom, to avoid difficulties.

(b) Firearms and Ammunition. Firearms must not exceed one per officer nor may the ammunition exceed 18 cartridges per officer. All firearms and ammunition must be carefully declared on Store List and should be collected and held in Master's safe custody while vessel is in Venezuelan waters.

(c) Contraband. Strict compliance with the customs law of the country is enforced by the authorities, and Masters are strongly advised to caution crew members against attempting to smuggle cigarettes. 1 open package per person is allowed to be carried ashore, but greater quantity will result in fine and imprisonment of the offender as well as lost ship's time. Due to very strict enforcement of the customs regulations, it is recommended that no goods be carried which are not shown on Store List. Any new articles (clothes, shoes, etc.) should be included in Store List and marked as personal belongings. If during a check-up by Customs, articles considered as contraband are found, this will not only mean confiscation of these articles, but also hours or days of lost ship's time, while the case is handled at court.

CONSULS: The following nations maintain consular representative in Maracaibo:

Belgium
Chile
Colombia
Costa Rica
Denmark
Ecuador
El Salvador
France
Germany (West)
Great Britain
Guatemala
Italy
Netherlands
Norway
Nicaragua
Panama
Peru
Portugal
Spain
Sweden
Switzerland
United States of America

TIME: Local time is GMT minus 4 hours.

VISITORS: All visitors to ships are prohibited except those company employees, petroleum inspectors, etc., whose duties require their presence aboard.

PASSENGERS: Passengers will not be permitted to disembark unless in possession of the required visa and documents. To facilitate clearance, if passengers are carried, the Master should include advice to this effect in his radio ETA.

POLLUTION: The Laws of Venezuela are very strict in regard to the pollution of harbour and coastal waters by oil, and heavy fines are imposed for violations. No dirty ballast, oil or bilge slops are to be pumped or allowed to escape overboard. All overboard discharge valves from cargo tanks and bilges are to be secured before loading or discharging commences. Loading is to be conducted with greatest care and vigilance in order that errors or delays in handling cargo valves may not result in overflows. All deck scuppers should be plugged before loading to avoid harbour contamination should an overflow occur. The Authorities require a written report to be submitted by the ship involved in the event of an oil spill.

SEAMAN LEFT BEHIND: Sailing may be withheld until all crew members are aboard with exception of those ashore for justified reasons. It is important that Masters bear in mind that the Venezuelan Law will at all times hold the vessel's Master, Agent, or Owner responsible for any seamen left behind in Venezuela.

Section A

BAJO GRANDE: 10.29 N. 71.38 W. (See Plan Book)

(1) OPERATOR: C.V.P. Llanoven Oil Terminal.

(2) OPERATOR: C.V.P. Llanoven. Natural gas liquids processing facilities.

(N.B.) For important details of Documentation, Pilotage, etc., see "Maracaibo Lake").

(1) **OPERATORS:** C.V.P. Llanoven.

LOCATION:

Maracaibo: On the North-Western shore of the Lake Maracaibo: Position: 10° 40′ North and 71° 38′ West.

Maracaibo is the capital of the State of Zulia and seat of all Government and Consular Offices, as well as the port of entry for all vessels loading at terminals in the Lake of Maracaibo. Upon arrival to Maracaibo, a representative of the appointed Agency will go on board to assist vessel.

Bajo Grande: Loading Pier: Position 10° 30′ 50″ N. and 71° 36′ 8″ W., about 8 miles (12.8 kms.) South of Maracaibo on the Western shore of the Lake and about 9,000 ft. (2,743 m.) offshore with its centre line North-South. Two vessels can berth simultaneously, one outside at Berth No. 1 and one inside at Berth No. 2.

The wharf is constructed as a pile-supported concrete island. It consists of 3 breasting platforms plus bow and stern mooring platforms. Pier Heads are 860 ft. apart.

DOCUMENTS: The following documents should be presented by the Master:

1. *Clearance from Sailing Port consisting of:*

(A) Sealed envelope from *Venezuelan Consul* in sailing port addressed to "Administrador de Aduana".

(B) Sealed envelope from *Venezuelan Consul* in sailing port addressed to "Aduana de Maracaibo" and attached to this envelope:

Store List.
Crew List.
Slop Chest Inventory.
Ballast Certificate.

(All visaed by Venezuelan Consul in sailing port).

(C) Special ballast report made up by Master.

The Maracaibo Port Captaincy, requires that the Masters of all vessels entering this jurisdiction, deliver to the Maracaibo Port Captain's representative, during his visit to ships in the port of Maracaibo, a report which must answer the following questions concerning ballast:

(1) Port or place where ballast was taken.
(2) Quantity taken.
(3) Type of ballast and condition of same.
(4) Where deballasting operation was or is to be carried out.
(5) Approximate deballasting time.
(6) Any other pertinent information that may be required.

2.	Crew List	6 copies
3.	Store List.	6 copies
4.	Slop Chest Inventory (Deck, engine and cabin stores listed separately)	6 copies
5.	List of Personal effects.	6 copies
6.	Deratisation Exemption Certificate	Original
7.	Venezuelan Net Tonnage Certificate	Original
8.	American Crew List.	4 or 2 carbon copies.

(If required: See under "American Crew List" below).

Boarding Party: The boarding party usually consists of the following persons:

One Quarantine Official
Two Customs Officials.
One Sanitation Dept. Official.
One Port Captain's Representative.
One Foreign Service Dept. Official.
One Vessel's Agent.

American Crew List: All non-American vessels loading for USA port should have the American Crew List ready on arrival in Maracaibo to be visaed by the American Consulate in Maracaibo and placed aboard ship before departure. The crew list should be prepared on Immigration and Naturalization Service Form No. 1–418 (Crew List Manifest) and should contain two sections:

Section 1 – Should list those crew members who are American or who possess individual visa documentation to the United States.

Section 2 – Should list, in the alphabetical order of their last names, those alien crewmen who lack United States visa documentation and therefore require inclusion in the visa of the crew list.

Only one name may be placed on each line of the crew list. Two names should not be placed in the space of one line, nor should a full line between two names be left vacant. All copies of the crew list presented must be legible (Occasionally the names of the crewmen included on the carbon copies of some crew lists presented at the consulate are blurred beyond recognition).

The information requested under column 1, 2 and 3 should be filled in completely.

Column 1 – Should always contain the complete first name and middle initial of the crewman.

Column 2 – Should show the nationality of each crew member and the number of his travel document.

Column 3 – Should always include the name of the port where the crewman was shipped, not simply the country.

At the time of the vessel's first application for a crew list, the crew list must be presented in 4 copies:

Orig. and 1 copy – Should contain only the information requested under Columns 1, 2, and 3.

Two Copies – Must include the following information of those crewmen to be included on the crew list visa.

Column 4 – Should list the date, city and country of each crew member's birth.

Column 5 – Should show the place of issuance of the seaman's travel document and the name of the Government which issued the travel document. (It is not necessary to list the date of issuance of the travel document).

Cargo documents:

1. *Captain's copy of Bill of Lading* – The Bill of Lading form used is the usual Warshipoilvoy form. Masters wishing to use another form should furnish 20 blanks on arrival in Bajo Grande. Master is requested to sign 3 negotiable Bills of Lading (Originals).
2. *One Copy of the Certificate of Quantity and Quality (Q. & Q.).*
3. *One copy of the Ullage Report.*

Outward Clearance:

Following documents are delivered on board by the local Agent before sailing:

1. *Customs Clearance* – Duplicate of "Conocimiento de Embarque" and Duplicate of "Manifiesto de Carga". (Both stamped and signed by Customs) or any other document specifically requested by the consignee or nominating source.
2. *Communication* – A letter from Maracaibo Customs Authorities to Authorities in port of destination.
3. *Zarpe* – Permission to sail signed by Maracaibo Port Captain. This is brought on board in Bajo Grande by the outbound Pilot.

Customs Guard: The Customs Guard will request Master to countersign his time on board the vessel. This is counted from the time the first hose was connected until all hoses were disconnected, regardless of whether the vessel was receiving cargo or not.

Accommodation Ladder: Vessels must provide an accommodation ladder. The use of rung ladders, pilot ladders, etc., is contrary to Port Regulations. Port authorities will board only by means of an *accommodation* ladder. it is recommended to rig this in advance in order to avoid unnecessary delays.

In order to guarantee the security and safeguard the lives of the officers that board the vessel inbound in Maracaibo, it is imperative that Masters strictly comply with the following precautionary measures:

(1) Each of the components and functional parts that holds together or supports the gangway ladder must be maintained in excellent condition.
Therefore, wire ropes, guide blocks and bolts etc., found to be defective or in bad condition must be immediately replaced.

(2) For maximum security, each time that your vessel arrives in this jurisdiction, the above mentioned mechanisms should be thoroughly checked and tested by the personnel aboard vessel before the gangway ladder is used by the boarding party.

APPROACHES:

Channels leading to Lake Maracaibo: The channels leading to the Lake Maracaibo are called the Outer Channel, the Inner Channel and the Lake Channel.

Outer Channel: The Outer Channel starts at the E.M. Buoy position: 11° 13′ 47″ North and 71° 33′ 31″ West and ends at the Zapara Island, a distance of about 14 miles. (About 22 kms.).

The light characteristics of E.M. Buoy are: flashing white every 5 seconds, visibility approximately 5 miles.

There are no turns in the channel and the course is 189°. The channel is 100 ft. wide and has a normal controlling depth of 44 ft. LWS with tidal range varying about 2 ft. 3 in. Cross currents are sometimes encountered near Zapara, San Carlos and Pescadero Islands, especially at LW when the cross currents are strong. Overtaking at these points is forbidden. There is one anchorage zone in the Outer Channel which is a trapezoid on the port side when navigating inbound near the buoys B–14, B–15, B–16 and B–18. All buoys in the Outer Channel are equipped with radar reflectors.

The Southern end of the Outer Channel is marked by buoys B–27 and B–28.

Inner Channel: The beginning of the Inner Channel is marked by buoys B–29 and B–30. The Inner Channel continues on the same course as the Outer Channel for about 10 miles, whereafter the direction changes to 150°, The entire length of the Inner Channel is about 12 miles. Beacons T–55 and T–56 mark its Southern end. The normal controlling depth is 44 ft. LWS. The channel is 800 ft. wide. Vessels are not allowed to overtake each other in the Inner Channel between buoys B–29 and B–30 and light beacons T–25 and T–26.

Vessels may overtake each other in the Inner Channel between light beacons T–39 and T–40 after having exchanged prescribed signals with the vessels to be passed. This manoeuvre is, of course, allowed only if conditions are favourable and no vessel navigating in the opposite direction is in sight. From beacon T–56 to Maracaibo harbour the channel is 800 ft. wide, depth 44 ft., its end is marked by buoys B–73 and B–74.

Navigation through Channels:

Inbound vessels leave to starboard side the buoys and beacons marked with even numbers and to port side the buoys and beacons marked with odd numbers.

Outbound vessels shall leave to port side the buoys and beacons marked with even numbers and to starboard side the buoys and beacons marked with odd numbers.

Vessels should pass as close as possible to the channel's edge on starboard side. Loaded vessels have preference.

Approaching vessels are to reduce speed in order to minimize the suction force of the displacing waters.

Vessels must maintain a distance of 1 mile (1,852 m.) by day, or night from other vessels navigating in the same direction.

No vessel should start to manoeuvre to overtake another vessel before having received clearly the affirmative signal from the ship to be passed.

A grounded vessel is not allowed to start any manoeuvre when another vessel is passing. Dredgers are frequently at work in the channels and caution should be exercised in passing them. Signals used by the dredgers are as follows:

Daytime: Black cylinder hoisted on side of yardarm:

You may overtake me on the side on which the cylinder is shown.

Two black balls over the bridge:

The channel is blocked.

Night:

Green light on side of yardarm (A white light on mast head helps to show on which side the green light is placed).

You can overtake me on the side on which the green light is shown.

Two red lights over the bridge:

The channel is blocked.

The tidal range is 4 ft. at neaps. Observed squat in the channels is about 1 ft.

Maracaibo Lake Channel Guard Service Corps have had evidence of vessels travelling out of the navigation channel in the vicinity of buoys B–3, B–5 and B–7; this risky procedure is considered very dangerous to the safety of the channel buoys and its installations.

Captains of all ships are reminded that all vessels inbound or outbound *must* pass the EM Buoy on the port side. This operation will be registered and controlled by their electronic devices installed at San Carlos Pilot Station.

Violators of this regulation, in addition to being economically responsible for damages to the buoys and related accessories, will be prosecuted in accordance with Article 118 Section I of the Venezuelan Law of Navigation.

In view of the above, and keeping in mind the protection of the interests of your owners, we ask that you comply at all times with this regulation emanated from the Port Captaincy.

PILOTAGE: Compulsory. Vessels proceeding direct to the Bajo Grande Terminal must enter outer channel and embark Pilot between buoys 25 and 27. After vessel arrives in vicinity of channel entrance, Master must contact *San Carlos Pilot Station* by radio telephone on Channel 16 requesting Pilot at buoys 25–27. The launch that leaves San Carlos Pilot Station with Pilot for ship, takes approximately 20 to 30 minutes to cover distance, and distance, between Buoys and San Carlos is approximately 6 miles (10 kms.).

Master must advise C.V.P. Llanoven and Agent ETA buoys 25–27, 72, 48 and 24 hours prior to arrival there.

Masters of Vessels entering Lake Maracaibo for the first time must cable their Local Agent notifying this fact, in order that the Agent may comply with the Port Regulations. This security measure makes it necessary for the ship to pick up a Pilot at Punta Cardon.

The Captain should notify Agent or contact Maraven, Punta Cardon by radio on Channel 16. As no Pilots are available at Punta Cardon, the Local Agent for the vessel requires 48 hours' notice in advance to facilitate making arrangements to fly a Pilot to Cardon and then have Maraven place the Pilot on board the ship.

The co-ordinates of Punta Cardon are approximately 11° 36′ North and 70° 15′ West. Maraven will charge approximately Bolivares 220.00 for this service. In addition, the ship will have to pay air fare, hotel expenses, and a higher Pilotage fee for this service. However, if the Captain of a ship has previously entered the channel as an officer of a ship, he is not required to pick up a Pilot at Punta Cardon.

We remind you that Pilots are authorised to leave the Jurisdiction, only when they are disembarked in Venezuelan ports. With this understanding, when special circumstances arise in which the Pilot cannot be disembarked at San Carlos and the ship is unable to enter the nearest Venezuelan port to disembark the Pilot, in this case the port of "Las Piedras", it is required that the Agent as well as the Captain of the vessel, forward to the Port Captaincy at the earliest opportunity a detailed report giving the reasons that compelled the Captain to take the Pilot abroad.

Pilots act in an advisory capacity only, and therefore the Master of the vessel retains full responsibility at all times. In the event it becomes necessary to disregard the Pilot's instruction in order to ensure the safety of the ship, Master must forward to Local Agent a full written report on the circumstances for delivery of same, to port authorities.

The Venezuelan Pilotage Law stipulates that Pilots must be provided with the same lodging as is given an officer. In case no extra officer's cabin is available, suggest the hospital be used by the Pilot. Also, Pilot should be seated at the officers' mess for his meals.

In case of accident to Pilot while performing his duty on board, it is the responsibility of the Master to furnish the Pilot with a full written report on the accident before the Pilot leaves the vessel. The Pilot must be able to present such a report in case of a legal claim.

As a result of accidents that caused the loss of lives, the Maracaibo Port Captaincy issued a Regulation with the view of safeguarding human life at sea and other navigable waters; Official Pilots that must embark on or disembark from undocked ships, must use an automatic-inflated type life vest. This procedure is also compulsory for all persons from private or public entities that are required to go aboard vessels that are anchored, stopped or navigating in the waters of Lake Maracaibo. Likewise, at the side of the boarding ladder where the Pilot boards or disembarks, a hoist or boatswain's chair shall be placed there, and within it a life line and a gas light ready to be used in case it becomes necessary. The Port Captaincy will see to it that this Regulation is strictly complied with.

Docking Pilot: The Government's Pilot will assist in docking operations. It should be borne in mind that Pilot acts as adviser only. The Master retains full responsibility at all times. Any damage incurred to vessel or loading platform which may be deemed to have been caused by the Mooring Pilot's fault or negligence, may be held against the ship.

Undocking: Government's Pilot will assist in undocking. Two tugs will be used as for docking.

ANCHORAGE: The Pilot will not manoeuvre the ship into anchorage, but will indicate the proper location to anchor. Care should be taken because of small boat traffic.

MAX. SIZE: The following restrictions in size and draft upon loading exists for vessels docking at Bajo Grande:

	Maximum Loading Draft	*Maximum Vessel Size*	*Max. displacement upon Berthing (tons)*
Outside Berth (No. 1)	40ft. 00in.	55,000 d.w.t.	—
Inside Berth (No. 2)	34ft. 06in.	36,000 d.w.t.	20,000

RADIO: *Information to be cabled to Local Agents 3 days prior to arrival*

1. *Flag:* If the vessel has loaded in Bajo Grande before or is listed in the Tanker Register published by H. Clarkson & Company Ltd., London, the nationality of the vessel need not be cabled.

2. *Sailing port and at which other port vessel will call in this area:* For clearing the vessel in and out of Maracaibo, local ship Agents must know beforehand from where the ship comes and which other port it will call in this area. Therefore, it is of importance to inform Agents whether the vessel will load part cargo or bunker, at which terminal, and whether inbound or outbound.

3. *Port for which vessel is cleared:* In case the vessel was diverted *en route* and consequently is not cleared for Maracaibo or one of the terminals in the Lake of Maracaibo, the Local Agents must obtain from authorities special permit for the vessel to enter the Lake of Maracaibo.

4. *Ballast Certificate:* If the vessel arrives in ballast a "Ballast Certificate" is mandatory. A fine against the vessel will issued by the Port Authorities if vessel does not have this certificate.

5. *Estimated Time of Arrival:* Cable ETA San Carlos Pilot station Buoys 25–27 (See "Pilotage") or, if the vessel is taking part cargo or bunkering inbound, cable ETA, bunker or first loading port. Please use local time if possible (4 hours behind GMT).

6. *Tonnage:* If the vessel has not loaded at Bajo Grande before, also cable the Gross and Net Tonnages. To determine whether the International or the Venezuelan tonnage should be mentioned, see General – "Tonnage Applicable".

7. *Master's Full Name:* Please sign your first message with Master's name and surname, which is also needed to clear the vessel in Maracaibo.

8. *Changed ETA:* An additional cable should be sent about 48 hours and 24 hours prior to arrival at Pilot stations Buoys 25–27 stating ETA.

Proper use of Radio Frequencies: We have received several circulars from the Maracaibo Port Captaincy, requesting Terminal Operators to caution all Masters of vessels calling at Bajo Grande Terminal on the improper use of the International Distress Frequency of (2,182 k/cs) for personal conversations. This procedure is contrary to the security of vessels.

A letter containing such caution will be delivered to the Master of each vessel loading at Bajo Grande by the Agent, requesting that the Master sign a copy signifying his acknowledgement of said letter of notice.

The International Distress Frequency was established specifically and exclusively for emergency calls such as shipwreck, fire and accidents. It is also used by ships and shore stations to make first contact but immediately after contact is made, the operator should switch to one of the following frequencies: 2120, 2080, 2630 and 2738 k/cs.

9. *Compulsory use of Single Side Band radio:* A circular letter from the Venezuelan Ministry of Communications, states that no licence will be granted for the installation of radiotelephone stations of modulated amplitude (A3). The installation and use of Single Side Band radiotelephone equipment is obligatory.

In consequence, the Ministry has requested that the terminal inform all users of Double Side Band (A3) radiotelephone equipment in order that they proceed immediately to install in their ships, launches and all other marine vessels Single Side Band equipment with the same frequencies that are presently in authorised use, which are: 2080, 2120, 2182, 2638 and 2738 k/cs.

The listening and Safety Station YXW–3 installed at the Venezuelan Nautical School is equipped to answer any calls on the International Distress Frequency with their transmitter of 1 kW.

As a result of the foregoing, a letter containing the above information has been prepared by the Terminal which will be delivered to the Masters of all vessels calling at the Bajo Grande loading terminal. The Masters of all vessels are required to sign a copy of this letter in acknowledgement of receipt.

TUGS: The Venezuelan Government has ruled mandatory the use of 2 tugs for docking and undocking.

NOTICE OF READINESS: Masters are free to tender their ships as being ready to load at any place and time which, in their opinion, conforms with the terms of the charter party. Terminal personnel authorised to countersign the notice of readiness have been instructed to indicate the time vessel was all fast or, if the vessel anchored to wait for berth, the time the vessel anchored. This does not imperil in any way the rights of the shipowner in his negotiations with the charterer and it limits the Terminal's liability to the consignee.

CARGO OPERATIONS:

Deballasting Facilities:

A recent Circular letter from the Venezuelan Ministry of Communications, Maracaibo's Port Captaincy, states that as of October 1976, no ballast (either clean or dirty) can be discharged into Lake Maracaibo waters. Therefore, all ballast must be pumped ashore to the petroleum terminal on which vessel is to take cargo. Heavy fines are assessed for vessel's violating this law and therefore we strongly recommend Masters to be particularly careful in this regard.

Shore deballasting facilities are available at Bajo Grande and are subject to no special regulations and procedures as yet. Tanker ballast water is pumped through two 8 in. hose connections into a 24 in. line of about 9,000 ft. in length to a 120,000 bbl. receiving basin situated on shore.

The deballasting basin is limited to receiving *only* petroleum hydrocarbons and petroleum hydrocarbons derivates. Emulsifiers, caustics, acids and chemical slops are absolutely unacceptable. Contamination of Lake Maracaibo waters with oily or chemical materials of any nature is strictly prohibited by Venezuelan Laws. The terminal is required to report to the Authorities any such contamination by vessels docked at Bajo Grande. HEAVY FINES ARE THEN ASSESSED AGAINST THE SHIPS. Vessel's cooperation is requested to prevent contamination from tank overflows, bilge oil, line leaks or from any other source.

Tank Cleaning and Drying:

Precautions as are common for any heavy oil should be taken to ensure that no ballast is left in any tank. If the cargo is contaminated with water, the water will not separate from the oil. The salt content of the oil will be raised approximately 10 lbs. per 1,000 bbls. for every 0.10% contamination by sea water. All cargo compartments must be stripped extremely dry.

Cargo pipe-line should be drained and or purged of water. On standard T-2 type vessels, this can be done by draining the fore and aft main cargo lines, both suction and discharge sides, into the pump room bilges followed by opening of main suction valves on each individual compartment, thereby releasing water retained in dead and transverse lines. After this procedure is completed, each compartment should be restripped with stripping pumps and lines, followed by draining the stripping line to pump room bilges. On other ships equipped with looped systems it is possible to blow the system with air and drain water into the bilges. In other situations, fresh water might be used to flush cargo piping systems of salt water and in turn strip salt water and fresh water as outlined for T-2 vessels. All deck scuppers should be securely plugged and all precautions should be taken to avoid pollution of lake waters.

Inspection of Tanks:

Before loading can commence, tanks and loading system must be inspected and passed. This is usually done by the Terminal's own Cargo Inspector but, if consignee so requests, third party inspection can be arranged.

Inspection Companies available in Maracaibo are the following:

Chas. Martin Venezolana de Inspecciones	(CHAS MARTIN)
E. W. Saybolt & Co., S.A.	(SAYBOLT)
Redwood Petroleum and Petrochemical Division	(REDWOOD)
Analistas e Inspectores Venezolanos de Petroleo C.A. Inspecciones, S.A.	(AIVEPET)

Line Displacement:

When a vessel is loading crude and products, it is usually necessary to displace lines once or twice during loading. Masters will be advised of necessary line displacements before loading starts and are required to take note because NOTICE HAS TO BE GIVEN BY VESSEL when pumping should be stopped and tanks changed. Once shore tanks have been changed, it will not be possible to change the quantity of the product already in the ship, as shore lines will then contain a product different from the one already loaded. *Ship's gauges and/or draft should be carefully checked when calculating required quantities.*

Spillage:

In case spillage occurs, the Terminal Port Supervisor must be advised immediately, as any spillage must be reported to the Authorities without delay.

There has been considerable discussion in Venezuela concerning oil spillages resulting in contamination of Lake Maracaibo. Considerable pressure is being exerted by Government agencies to eliminate all spillage, and the Terminal is making every effort to avoid contamination of Lake Maracaibo.

While vessel is at Bajo Grande take special precautions to avoid dirty ballast, bilge water or any other contaminant entering the Lake.

If a spill should occur and Terminal representative, the Government's representative of the National Guard observes that the waters of the Lake are being contaminated by any substance from the vessel the Terminal will request that vessel suspends deballasting, loading or discharging operations immediately and all consequences that might arise from this operation such as short loading, the unmooring of your vessel, fines, damages to fishermen, clean up costs, etc., *will be strictly, for vessel's account.*

We strongly recommend to Masters to emphasize to the officers on deck to endeavour to avoid spillages and to make certain that the scupper plugs are installed prior to commencement of loading operations in order to withhold on deck any spillage that might occur.

After Loading:

All Butterworth plates, tanks tops and ullage plugs should be inspected to ensure against entry of water. Inspection of ullage plugs should follow on completion of temperature readings because of the necessity of taking temperatures en route. Sea suction valves should be secured by positive means until all cargo has been discharged. This may be accomplished by numbered seals, chains and padlocks. The method of securing should be noted on the inspection documents. Regardless of which method is used, appropriate log entries should be made indicating the date, time and method used and under whose supervision, both vessel officer and/or Cargo Inspector, such method was applied.

About 1 hour is required for the preparation of the cargo documents which are normally delivered on board before sailing.

Temperature of Boscan Crude and Boscan Products at Sea:

On short voyages, as for instance to the U.S.A., it has proved most practical to maintain the loading temperature. On longer voyages, as for instance to Europe, the temperature may be dropped to 130°F., which does no harm as long as sufficient time is given to bring the temperature up again to that required for discharging. Masters should, however, not expect a temperature rise of more than 5°F. per day, especially if the sea temperature is low. The heat transfer properties of Boscan Crude are very poor as are those of the heavy products made from this crude. Many ships have been delayed in the discharge port due to too low cargo temperature. A temperature of 160°F. is suggested for discharging Boscan Crude, Topped Boscan and cutback asphalts.

Discharge Cargo:

Boscan Crude has a flash point of 110–160°F. and a maximum viscosity of 1400 SSF at 140°F. The viscosity at other temperatures follows the pattern of other petroleum products. Boscan Crude has been successfully handled in ships fitted with both reciprocating and centrifugal type pumps with forward and after pumprooms respectively. It is generally found that this crude can best be handled at a temperature which brings its viscosity to about 600 SSF 160°F. Vessels with forward pumproom should control stern trim so that it does not exceed about 4 ft. while stripping the after tanks. Also a 5° list is very helpful when stripping. Once the cargo gets below heating coils, tanks must be pumped empty as fast as possible. At times it has been found helpful to gather tanks strippings into a single tank for discharge ashore, as it is very difficult to strip against heavy back pressures. Watch reciprocating pumps for vapourlock. Because of high viscosity, proper care should be taken that no oil is left in vessel discharge lines at low temperature.

Tank Cleaning After Discharge Cargo:

Many Masters have expressed concern over tank cleaning after discharge. Assuming that the ship proceeds to sea for this operation and has sufficient time for proper execution, vessel may be cleaned quite thoroughly using the Butterworth system. However, it is of vital importance that the system be used at maximum pressure and temperature (not below 160 p.s.i. and 170°F respectively). At these conditions and with 2 machines, it has been found that about 4 hours are required for each tank. It is of importance to keep the tanks well stripped during the Butterworthing. Some prefer to steam out the tanks before Butterworthing. If this course is adopted care should be taken that the steaming does not last more that 1 hour as the heat will drive off the light ends of the oil and leave a rubbery residue that is very difficult to remove.

It has been found helpful to keep the machines in LOW position for about 1 hour and the HIGH – MIDDLE and LOW in order, in the usual manner.

Boscan Crude and Products/Light Products:

Product	*API Gravity*	*Loading Tempera-ture °F*	*Loading Lines used*	*Normal Loading Rate B/H*
Boscan Crude	10.0–10.4	160	2×18 in.	10,000
Boscan Crude Blends	13.0–19.0	140	2×18 in.	10,000
Topped Boscan Crude	9.5–10.0	160	2×18 in.	10,000
Topped Boscan Crude Asph. Grade	8.0–10.0	160	2×18 in.	10,000
Cutback Asphalt	11.0–15.0	170	2×12 in.	5,000
Asphalt Cement (Pas)	5.0– 8.0	300	1×14 in.	5,000
Gasoil	35.0–42.5	90	1×12 in.	6,000
Fuel Oil No. 2	38.0–40.0	90	1×12 in.	6,000
Fuel Oil No. 5	21.0–22.0	120	1×12 in.	5,000
Fuel Oil No. 6	16.0–18.0	160	1×18 in.	12,000
Light Naphtha (LSR)	70.0–73.0	85	1×12 in.	6,200*
Heavy Naphtha (HSR)	52.0–53.5	85	1×12 in.	6,200*
JP-4	45.0–51.9	80	1×12 in.	6,200*

*Maximum rate due to Bajo Grande Terminal security regulations.

FUEL: *Advance Notice of Requirement:*
Should a vessel arriving at Bajo Grande require any bunkers, Owner or Operator must place their nomination with C.V.P/Llanoven via Telex as much in advance of the delivery date as possible. Telex should indicate name of vessel, ETA at Bajo Grande and quantity and quality of Marine Fuels required. A cash deposit in U.S. Dollars covering the nomination must be made prior to the delivery date into the following account:

First National City Bank
339 Park Avenue
New York, N.Y.
U.S.A. 10022
Current Account No. 36990309
(C.V.P./Llanoven Petroleum Income Account)

Owner or Operator must also request F.N.C.B. to confirm via Telex to C.V.P./Llanoven that such deposit has been made in order to cover the cost of bunkers to be delivered to vessel arriving at Bajo Grande at the current ETA. Only after this Telex has been received will delivery actually proceed.

Should the Owner or Operator have a credit account with Chevron, he can also contact either Chevron International Oil Company Inc. in San Francisco (California, U.S.A.) and New York (N.Y., U.S.A.) or Chevron International Oil Company, Ltd., London (England), requesting credit to cover the delivery. CHEVRON would in turn cable to C.V.P./Llanoven the order to supply bunkers. If such is the case, the above mentioned cash deposit will not be required.

Bunker Facilities:
Bunkers are available from pipe-line at Bajo Grande Terminal for vessels loading and unloading cargo at berths No. 1 and 2. Bunkering rate is about 2,500 bbls.p.h. for Bunker "C", Intermediate Bunker Fuels, Marine Diesel and Gasoil.

Marine Fuels and Lubricants available:
Bunker Fuel (sometimes called Bunker "C")
Intermediate Bunker Fuels.
Marine Diesel and Gas Oil.

Lubricants are generally available in the Maracaibo area. Should you require any, we recommend to contact vessel's local Agent.

Lighterage:
Bunker Fuel, Intermediate Bunker Fuels, Marine Diesel and gas oil are also available for ships in the Maracaibo area. The barging rate is $0.30 per barrel; minimum $100.00. 72 hours advance notice is required for barge deliveries of all products.

FRESH WATER: Delivery of boiler and potable water is made by barge at an all-inclusive price of Bolivares 16.00 per metric ton, *minimum quantity 100 tons.* The barge holds about 160 tons and the pumping rate is about 25 t.p.h. Requirements should be cabled in advance to the Agent of the vessel in Maracaibo.

REPAIRS: No major repair facilities are available in Maracaibo but small repairs can be undertaken by local machine and electric shops. Shore labour can be furnished if required. Technicians are available for minor radio repairs. Nearest dry docks are at Curacao for vessels up to 30,000 d.w.t. and at Puerto Cabello, Venezuela for vessels up to 18,000 d.w.t.

CUSTOMS: *Contraband:* Strict compliance with the Customs Law of the Country is enforced by the Authorities and Masters are strongly advised to caution crew members against attempting to smuggle cigarettes. 1 open package per person is allowed to be carried ashore, but a greater quantity will result in fine and imprisonment of the offender as well as lost ship's time. Due to the very strict enforcement of the customs regulations, it is recommended that no goods be carried which are not shown on the store list. Any new articles (clothes, shoes, etc.) should be included in the store list and marked as personal belongings. If during a checkup by customs, articles considered as contraband are found, this will not only mean confiscation of these articles, but also hours or days of lost ship's time, while the case is handled at court.

CONSULS:
Following countries have consular representation in Maracaibo.

Argentina
Austria
Belgium
Bolivia
Colombia
Costa Rica
Denmark
Dominican Rep.
Ecuador
El Salvador
France
Germany (West)
Great Britain
U.S.A
Guatemala
Italy
Mexico
Netherlands
Nicaragua
Norway
Panama
Puerto Rico
Peru
Spain
Sweden

SURVEYORS: American Bureau of Shipping and Lloyd's Register have Agents in Maracaibo. Their services may be procured by cabling requests to the local Agent at Maracaibo.

HOLIDAYS: The Terminal office will be closed on the following days. New Year's Day (January 1st); Easter Thursday/Friday (March/April); Declaration of Independence (April 19th); Labour Day (May 1st); Battle of Carabobo (June 24th); Independence Day (July 5th); Birthdate of Simon Bolivar (July 24th); Columbus Day (October 12th); Chiquinquira's Day (November 18th); Christmas Day (December 25th); All Saturdays; All Sundays.

SHORE LEAVE: Shore Leave is permitted at the discretion of the Port Authorities; required number of shore passes will be brought on board on arrival in Maracaibo and have to be returned to the customs guard again before the vessel leaves Bajo Grande.

GENERAL:

Tonnage applicable on fees:
On ships registered in countries which have a reciprocal tonnage agreement with Venezuela, the gross Tonnage registered in such countries will be applied for calculating pilotage fees. Such countries are:

Denmark
France
Germany
Netherlands
Ireland
Norway
Portugal
Sweden
United Kingdom
U.S.A.

On ships registered in countries not listed above, such ships calling at Venezuelan ports for the first time must be measured for Venezuelan tonnage by the Port Captain. It is usual practice to take ashore the ship's Panama Canal or Suez Canal International Gross Registered Tonnage Certificate, which is used as a basis for recalculating tonnage under the Venezuelan regulations, and return it before sailing. The Venezuelan Admeasurement Certificate, when later issued, is forwarded to the Owners. A fee is charged for this certificate, which is payable only on the ship's first call.

Firearms and Ammunition:
Firearms must not exceed 1 per officer nor may the ammunition exceed eighteen cartridges per officer. All firearms and ammuniton must be carefully declared on the store list and should be collected and held in Master's safe custody while vessel is in Venezuelan waters.

Guards:
Customs guards are stationed on the platform at Bajo Grande. They must be provided with sleeping quarters on the ship and seated in the officers' mess for their meals. Non-compliance may cause cargo stoppage and fines. Masters are reminded that these guards are representatives of the Venezuelan Government and any uncourteous action on the part of the crew or passenger will be regarded as a slight against the Country itself.

Gangways:
The ship is to supply a safe gangway, which allows easy access to the vessel. The Terminal has a gangway which may be used on request with the understanding that any damage to the gangway or ship or shore personnel through its use may be held against the ship.

Safety:
Vessel must be in readiness to move at all times. The attention of Masters of turbine steamers are called to this regulation.

Ship's fire fighting equipment must be ready for instant use while vessel is alongside. Shore personnel will render assistance in an emergency but, since no fireboats are stationed in the immediate area, vessels should be prepared to combat fire without outside assistance. It is necessary to obtain Terminal's approval for repairs of propelling machinery.

Normal safety precautions apply. Smoking is not allowed on the pier. No hotwork is permitted on vessels alongside without a *written* permission from the Port Supervisor. *Swimming alongside pier is dangerous and absolutely prohibited.*

Launch Service:
The launch is primarily for the use of the port staff, but will transport crew when convenient.

Taxi:
Taxi service will be generally available upon request to vessel's Agent.

Visitors:
According to Port regulations concerning access to ships and loading terminals and in the interest of industrial safety, only persons directly concerned with loading operations will be permitted to board vessel or visit the loading platform at Bajo Grande.

Plimsoll Marks:
The Port Captaincy requires that Plimsoll Marks be readily visible. If they are not clearly legible, permission to sail may be withheld and a fine imposed. This is applicable to inbound and outbound vessels.

We therefore, request your full compliance with this Regulation from the Maracaibo Port Captaincy.

Marine Store/Charts:
Marine stores are available in limited supply. Marine charts are not available.

Compass Adjusters:
There are no compass adjusters in Maracaibo.

Seaman left behind:
Sailing may be withheld until all crew members are aboard with exception of those ashore for justified reasons. It is important that Masters bear in mind that the Venezuelan Law will at all times hold the vessel's Master, Agent, or Owner responsible for any seamen left behind in Venezuela.

Crew in Transit:
In case a crew member is left ashore for a justified cause, such as hospitalization, repatriation, etc., his documents and personal effects are to be delivered to the vessel's Agent before sailing. A letter is required from the Master with detailed instructions as to maximum cash advance, etc. All expenses incurred by such members are for vessel's account.

Port Supervisor:
Masters or their representatives are invited to call at the Port Supervisor's Office on shore in Bajo Grande or over the telephone on the pier, for any further help, information or complaints.

Terminal:
Cable Address: C.V.P./Llanoven Maracaibo. Telex: Nos.: 61254 and 61161.

(2) **OPERATORS:** C.V.P./Llanoven.

Location: S.W. of channel buoys B–87 and B–88.

The installations for processing natural gas liquids at Bajo Grande processes liquids for C.V.P./Llanoven, and they are known as Product Owners. The Plant is situated in Bajo Grande, approximately 10 miles to the South of the Port of Maracaibo, on the West bank of Maracaibo Lake.

FLAG: The local authorities require the Venezuelan flag to be hoisted to the top of the vessel's mast from the time it enters the outer channel on arrival, until it leaves the outer channel on departure.

DOCUMENTS: *Customs Clearance for Programmed Vessels:*

Vessels which arrive in ballast or with cargo in transit, require the following documents (with additional file copies if these are required):

(A) Clearance from the last port
2 copies–1 visaed Ballast Certificate
1 or more letters Consular Correspondence (in sealed envelope)
4 copies–2 visaed Passenger List
4 copies–2 visaed Lists of Equipment
4 copies–2 visaed List of Passengers in Transit
4 copies–2 visaed List of Mess Equipment and Spares
4 copies List of Personal Effects
4 copies–2 visaed List of Stores
5 copies Crew Lists.

Vessels which arrive with cargo must have, apart from the foregoing:

(B) 4 copies–2 visaed Venezuelan Entry Manifests
6 copies–2 visaed Bill of Lading
2 copies visaed Entrance Manifests.

In the absence of a Venezuelan Consul at the last port, the Customs clearance documents must be signed by the Consul of a friendly nation, one of the Port Authorities, Notary Public, the Chamber of Commerce, or by two recognised signatories.

Clearance through Customs of diverted vessels:

Vessels diverted on the high seas to Maracaibo to load at Bajo Grande must present all the documents indicated in (A) above, except the consular correspondence, which they will not have.

Vessels diverted on the high seas to Maracaibo (Bajo Grande) which do not have a Venezuelan Customs Clearance on board, must advise their Agents by radio prior to their arrival, the name of the vessel, the name of the Master, nationality of the vessel, net Venezuelan tonnage (if available, if not, the net registered tonnage), last port of discharge, port to which it was originally sailing and the ETA at the Pilot station at San Carlos. This information is required to obtain the Entry Permit prior to the arrival of the vessel. Three copies of the diversion telegram received by the vessel, signed by the Master, together with those documents detailed above, must be presented to the Port Authorities on arrival at Maracaibo. Non-presentation to the Port Authorities of the documents or the information mentioned will occasion a fine to the vessel.

Inspection by Customs: All vessels arriving from foreign ports destined for the dock at Bajo Grande must anchor in the Port of Maracaibo for Customs inspection by the Port Authorities before proceeding to Bajo Grande. The vessel's gangway must be in position prior to arrival at Maracaibo.

A member of the National Guard of Venezuela will come on board every vessel at Bajo Grande to observe the activities in connection with the operations of loading and unloading. This official is authorised as representative of Customs and is known as the "Vigilante de Aduana". He must be fed and lodged at the same standard as ship's officers.

Loading Documentation: The loading and Customs papers will be delivered to the Captain by the Agent of the ship on his arrival at the Port of Maracaibo, on his voyage outwards.

PILOTAGE: Vessels entering currently have the option of taking on the official Pilot at:

(a) The channel in front of the Pilot station at San Carlos, between the Buoys B–24 and B–26.

(b) In front of Amuay Bay or Punta Cardon. However, to arrange this service, Agents must be advised at least 48 hours in advance of this requirement.

The Pilot who boards the vessel in front of San Carlos will take it to Maracaibo, where he will disembark.

Due to weather conditions, the Port Captaincy of Maracaibo cannot guarantee the embarkation or disembarkation of the Pilots at the "EM" buoy. For this reason, Captains must communicate with the Pilot station of San Carlos to receive necessary instructions as to where the Pilot will be embarked, the latter usually coming on board between Buoys B–24 and B–26. The system of communication between the Pilot station of San Carlos and the vessels will be via radio-telephone. The San Carlos frequencies are: 2182 kc/s. and 156.6 mc/s. (VHF Channel 16). Other frequencies are: 2122 and 2080 kc/s. and 156.8 mc/s.

Pilotage to navigate through the inner and outer channels is compulsory at all times. The maximum speed of navigation in the dredged channels is 10 knots.

Vessels leaving will take the Lake Pilot on board at Bajo Grande and on reaching the port of Maracaibo the Pilot will be changed for another to take the vessel through the channel. The channel Pilot will pilot the vessel up to the San Carlos bank, generally between Towers E–31 and E–33, where he will disembark. The Port Captain of Maracaibo has issued instructions to all ships' Agents so that they may inform the Captain and/or Owners of the vessels that all vessels must identify themselves with the Pilot station of San Carlos by radio-telephone, regardless of the time of day, when they are entering between Buoys B–17 and B–19 and when they are leaving between Buoys T–42 and T–40.

Every time a launch with an official Pilot on board leaves to attend to a vessel in sight, the costs will be charged to the company which owns the vessel or to its representative, even when the service has not been given.

A government Pilot will assist each vessel from Maracaibo to Bajo Grande and on the outbound trip to Maracaibo. The government Pilot will also assist in the berthing and unberthing operations. The ship's Agent will inform the Master of each vessel, as well as the government Pilot, the schedule for berthing the vessel.

The Plant Mooring Supervisor will board each vessel prior to approaching the dock. Mooring Supervisor will assist in the mooring and unmooring operations. It should be understood that the Mooring Supervisor acts only in an advisory capacity to the Master. The vessel's Master retains full responsibility at all times. The Plant assumes no responsibility in connection with any acts or advice given by the Mooring Supervisor.

APPROACHES: The buoy which marks the entrance to the outer channel (buoy "EM") is situated in approximately position 11° 13′ 47″ N., 71° 33′ 31″ W. The characteristics of the light of the "EM" buoy are: white flash every ten seconds, visibility approximately 5 miles. The distance between the "EM" buoy to the Southern extremity of the outer channel, marked by the Buoys B–27 and B–28, is approximately 15.75 miles. The channel is 1,000 ft. wide and normally has a depth of 42 ft. minimum at low tide observed at the time of neap tides with a tidal amplitude varying 2 ft. 3 in.

There is a breakwater 0.5 miles to the East of and parallel to the outer channel which extends 1.6 miles to the North from the Northern side of the Island of Zupara. The end of this breakwater is marked by a steel frame tower with a light 25 ft. above sea level. Characteristics of the light are: white flash every 8 seconds, visibility about 3 miles.

Commencement of the inner dredged channel is marked by the Buoys B–29 and B–30. The length of this channel, which is marked by buoys, is approximately 12 miles, and ends at Buoys T–55 and T–56. The channel is 800 ft. wide and the normal checked depth is 43 ft. neap tides with a tidal amplitude varying between 1.5 ft. to 2.5 ft.

The channel from the Buoys T–56 as far as the port of Maracaibo is a dredged channel, whose end is marked by Buoys B–73 and B–74. It is some 800 ft. wide and has a depth of at least 43 ft. The distance is about 11 miles and the tidal amplitude range is insignificant.

RESTRICTIONS: Bridge, clearance at MHHW 146 ft.

MAX. SIZE: The maximum permissible fresh water draft at the dock is 36 ft. and the maximum overall length vessel the dock will accept is 700 ft. Vessels with a berthing displacement up to 20,000 long tons will be accepted, providing the approach velocity can be controlled to 0.3 ft. per second or less.

Vessels with an overall length greater than 700 ft. or with a fresh water draft of more than 26 ft. or a displacement greater than 20,000 long tons will not be accepted for loading at Bajo Grande, unless they have obtained the prior authorisation of C.V.P./Llanoven. If the vessel is not equipped to moor, load and unmoor in a safe manner, the vessel will not be loaded. In such cases, there will be no responsibility on the part of C.V.P./Llanoven.

RADIO: C.V.P./Llanoven Export Department also has radio-telephones with the following frequencies: 2080, 2120, 2182 (stand-by), 2638 and 2738 kc/s. and 156.6 (stand-by) and 156.8 mc/s., operated in accordance with the following schedule:

Monday through Friday:	From 0730 until 1130 From 1300 until 1700
Saturday, Sunday and Holidays:	From 0730 until 1030 approx.

Any tanker or vessel bound for Bajo Grande shall cable C.V.P./Llanoven, at least 5 days in advance of its scheduled arrival time in Maracaibo, giving notice of its estimated time of arrival, loading capacity, amount and type of product to be lifted and condition of ship's tanks.

At least 48 hours in advance of arrival at the San Carlos Pilot station, the vessel's estimated time of arrival, nationality, Venezuelan net tonnage (if available, otherwise its registered tonnage), quantity and type of cargo required, condition of ship's tanks, name of Agent, last port, Master's name and all requirements of the vessel while in port should be cabled to "C.V.P./Llanoven Maracaibo" and to the ship's Agent. As the cable office in Maracaibo is not able to communicate directly with vessels at sea, messages to "C.V.P./Llanoven Maracaibo" and to Agent should be routed via PJC Curacao, and should be prefixed "Via AAC" (All America Cables and Radio Inc.). Failure to give such proper notices shall absolve the Plant from any claim for delays or demurrage.

TUGS: 2 tugs, each 1,600 h.p.; will be used for mooring and unmooring operations.

BERTHING: The dock proper may be identified by the overwater pipe-line trestle that connects the dock with shore.

The dock is located approximately 10° 30′ N. 71° 36′ W., which is 2 miles off shore from the Bajo Grande Natural Gas Liquids Processing Plant and S.W. of channel buoys B–87 and B–88 on the Maracaibo channel. The dock is single sided and consists of 4 breasting pilings, 4 mooring dolphins and a loading platform.

The dock is equipped with a compressor and auxiliary equipment to assist the ship in compressing and re-condensing the ship's vapours. No liability will be assumed by the Plant Operator for unavailability of the Dock's vapour compressor. The dock is also equipped with a vent system to dispose of contaminated vapours.

A tie-up crew will handle all mooring or pick-up lines before and after loading.

The Plant tie-up crew will assist the ship's crew in positioning and connecting the cargo loading arms and in removing same on completion of loading. The dock loading arms are equipped with 10 in. ASA 300 lb. RF flanges. It shall be the responsibility of the ship to furnish its own fittings to mate with the dock's 10 in. ASA 300 lb. FR flanges.

Mooring procedure. Any vessels calling at Bajo Grande must be equipped with mooring hawsers of sufficient length and strength to run a line to each of the 2 bow and 2 stern mooring dolphins and shall use such equipment while at the dock. Vessels equipped with tension winches and cables shall utilise these in addition to the mooring hawsers or alone if the vessel has sufficient cables to meet the minimum requirements of running a cable to each of the bow and each of the stern mooring dolphins. For added security of those vessels not equipped with tension and/or cables, 1 steel cable will be furnished for a bow and another for a stern mooring dolphin by the Plant. It should be recognised by all parties that while the use of these cables is strongly recommended, the Plant accepts no responsibilities for loss or damage to any vessel or to any facility or to any person that may result from the failure of this equipment.

For the convenience and safety of all personnel boarding or disembarking while at Bajo Grande it is recommended that the vessel's accommodation ladder be rigged on the port side, this being the side normally laying against the dock. The ladder should be suspended after the Mooring Master boards and during docking operations to avoid being fouled.

BALLAST: There are installations for unloading dirty ballast. Vessels which arrive at Bajo Grande with dirty ballast must advise 48 hrs. in advance with regard to any emulsifiers, detergents or chemicals which may be present in the ballast and which are going to be unloaded. If these emulsifiers, detergents and chemicals are not acceptable, C.V.P./Llanoven will advise the ship and the latter must arrive at Bajo Grande with clean ballast.

The ballast will be unloaded at a rate of approximately 5,000 bbls.p.h., nevertheless in the case of unexpected damage or malfunction of the system at Bajo Grande, C.V.P./Llanoven will give instructions to the Master of the vessel so that he may arrive with clean ballast and C.V.P./Llanoven will not be responsible for the delays which may be suffered by vessels in cleaning their tanks prior to arrival.

It is strictly prohibited to discharge into the lake any liquid or solid waste resulting from tank cleaning. Therefore it is recommended that the Master gives instructions to all personnel so that they avoid any possible leak or contamination in the lake.

In the event that the representative of the Plant or the National Guard observe that dirty ballast is being discharged into the lake, or even residues or other contaminatory organisms whilst clean ballast is being unloaded, such operations will immediately be suspended and the consequences will be strictly for the account of the ship.

LOADING: *Notice of Readiness:* On arrival at Bajo Grande and after inspection by the Customs Authorities, and having obtained any other official approval required before loading, the Master of the vessel will notify C.V.P./Llanoven in writing that the vessel is ready to load. This notification must include a report of the conditions of the tanks of the vessel, specifying in detail the temperature, pressure, last loading, list of vessel and trim, possibility of contaminatory organisms and any other conditions which may effect the loading.

The Master of the vessel may request any equipment and/or service which he considers necessary for the safe and efficient loading of his vessel and C.V.P./Llanoven will make every effort to fulfil this request.

It will be the responsibility of the vessel to provide its own connections to join up with the RF 10 in. 300 ASA flanges of the dock.

It will be the responsibility of the ship's Master to ensure that prior to commencement of loading, the atmosphere inside the tanks, which are to receive products are within the safety limits stipulated. Nevertheless, C.V.P./Llanoven reserves the right to inspect at any time, to verify the fulfilment of these safety precautions and to refuse to load any vessel which in the opinion of C.V.P./Llanoven does not fulfil the safety requirements stipulated.

LPG refrigerated vessels will not be considered ready to load at Bajo Grande unless all the LPG tanks contain LPG vapours and are sufficiently cooled to permit shipment of the nominated products.

Vessels which receive completely refrigerated products must be capable of receiving at their boiling point from 0.5 to 2.5 p.s.i.g. Such vessels must have a refrigeration system capable of liquifying all the vapours resulting from the shipment at the rate specified and including those vapours which form as a result of the heat gained by the vessels tanks.

Loading Procedure: The positioning and connection of the loading arm must be effected to the satisfaction of the personnel in charge of the vessel. After approval of the personnel in charge of the vessel, the loading valves may be opened to check that the connections do not have leaks and loading may commence.

The maximum loading rate is 8,000 bbls.p.h. (750-775 metric t.p.h for completely refrigerated products and petrol) and a minimum loading rate of 250 bbls.p.h. (23 metric t.p.h.).

The pumps are designed to supply a minimum flow of 250 bbls.p.h. at a pressure of 225 p.s.i.g. and, since the installations at the Bajo Grande Dock do not have facilities for controlling the pressure of LPG which is being loaded, they are not responsible for any damage or delay which may occur due to the request for reduction in flow and pressure of LPG in order to cool or purge the vessel's tanks.

There are no installations for generation of inert gases. LPG vessels which require cooling, purging or any other assistance in Bajo Grande can be accepted after prior request in writing from the Master of the vessel; however, these services will be charged to the vessel. The responsibility for helping to effect purging and/or cooling is charged at 733 Bolivares per hour, during the time that such operation of purging or cooling causes the vessel to exceed the permitted period of stay.

The quantity of products used in such purging or cooling will be for the account of the vessel.

In the event that the dock vapour compressor is operated at the request of the vessel's Master for a purpose other than for purging or cooling, this will be charged at the rate of 500 Bolivares per hour to the ship.

All loading and unloading operations must be suspended whilst there is bad weather and the tank covers of the vessel must be closed and secured. During periods of calm, petrol or other products with a low flash point can be loaded at reduced rates or the loading operation can be interrupted if the heavy vapours are not being dispersed with sufficient speed to avoid dangers of gas accumulation. Officers on the vessel must be alerted so that they may be on watch whilst such conditions apply.

Under normal operational conditions it may be necessary to displace the loading line. This will require the person in charge of the vessel advising the representative of the Plant when the loading is nearing completion in order to complete an equal quantity to the capacity of the loading line.

Permitted Period of Stay: (a) The permitted period of stay, as is defined hereunder, shall commence to be counted from 6 hours after arrival of the vessel at Bajo Grande. The permitted period of stay will be terminated when the final mooring cable has been withdrawn from the quay.

For the purpose of these instructions, the Notice of Readiness, may be delivered after the vessel has tied up at the dock; nevertheless, the arrival at Bajo Grande shall be defined as the time when the vessel passes between Buoys B-87 and B-88, which mark the Maracaibo navigational channel and are situated approximately 1,000 m. in front of the Bajo Grande Dock.

(b) In the event that a vessel arrives at a different time to that confirmed in the shipping programme, and unless C.V.P./Llanoven has approved a different arrival time, vessel must await mooring of other programmed vessels before arriving and which vessels may have arrived at that time and the permitted period of stay will commence when the loading operation commences, or 6 hours after receiving Notice of Readiness, whichever is the later. It is agreed that a vessel shall be included in the loading programme if it arrives at Bajo Grande between the hours of 12.01 hrs. on the accepted date and 0600 hrs. of the following day.

(c) Except for the provisions in (b) above, all vessels arriving at Bajo Grande will have the right to moor in the order in which they appear in the shipping programme. C.V.P./Llanoven, at their discretion, may change the order of shipment when it may be necessary for reasons of safety or for the purpose of obviating a closure of the Plant or reduction in production.

(d) The waiting time permitted shall be 24 hours, plus one (1) hour for each 6,000 bbls. of product loaded in excess of 114,000 bbls. This waiting time shall be that permitted to load the complete cargo or part of the cargo of the vessel, it being understood that any time spent in deballasting operations will not be taken as waiting time. If the loading operations are delayed or interrupted by *force majeure*, which shall include the closure of the shipping terminal due to bad weather, the time thus lost will not be counted as permitted waiting time.

(e) The loading operations shall be considered as terminated when the loading hoses are disconnected. Every vessel will leave the quay as quickly as may be practically possible after having completed shipment of the cargo and the personnel of the vessel and those on land have arrived at an agreement as to the quantity of products shipped.

(f) In the event that a vessel is moored at the quay for six consecutive hours after C.V.P./Llanoven has notified the Master of the ship that the installations are ready to deliver the product, if the vessel on completion of this time is not in a position to receive products, then at the discretion of C.V.P./Llanoven, the vessel may be withdrawn from the quay, to prevent the products burning or a reduction in production.

A vessel may be withdrawn from the quay at any time for reasons of safety.

Verification and Measurement: Determining factors to arrive at the official figures of a shipment:

(a) Petrol and Butane:

(1) Correction factors of the individual meters less than 1%. In this event the terminal shall always use the figures of the meters as official (and not take into account the absolute difference in barrels) taking always the precaution of carrying out a comparison between the figures of the ship and those of the land.

(2) Factor of correction in any of the meters greater than 1%. In this event the vessel's figures will be used, comparing them in all aspects with the figure of the meters without applying the correction factor and with the land tanks.

In those cases in which the vessel's figures are used, it is appropriate to suggest that they check their figures.

(3) In the event of the measuring system not operating, and the vessel cannot give its own figures, as a last recourse the figures of the shore tanks will be used.

(b) Propane:

(1) the vessel's figures will be taken proceeding in exactly the same way as in point (2) of sub-section (a) above.

(2) In the event that the vessel cannot supply figures, the figures of the shore tanks will be used.

All volumes will be adjusted to the volume equivalent to 60° F in accordance with the applicable sections of Standard API 2534 and the corresponding tables of the Measurement Tables of Oil ASTM (latest edition) or other methods or standards selected by C.V.P./Llanoven.

If the product delivered is LPG, the content of the ship's tanks will include the quantity of the product in the form of vapour.

All volumes will be calculated in U.S. liquid barrels at 60° F and the adjustments at this temperature will be made in accordance with the Oil Measurement Tables ASTM-1P, American Edition 1952 (or the ruling tables which may replace these).

In the event of the products being loaded in a vessel whose tanks, pipes and equipment are empty when loading commences, the gross volume of products which may remain in the pipes and equipment on completion of shipment and at the time of final measurement, shall be calculated on the basis of the volumetric capacity of those pipes and equipment, adding the calculated volume loaded in the vessel's tanks and including in the total volume delivered to and received by the vessel at that time. In the event that the procedure described is used to determine the volume of products delivered and if during the time of this delivery vapours from the vessel's tanks be vented then the quantity of vapours vented shall be determined as shall also be the liquid volume equivalent to these vapours in normal conditions and this will be added to the quantity determined in (a) and (b) above.

Permissible Composition of the Atmosphere of the Tank for purging: Maximum percentage per volume of air or oxygen permissible for the safe shipment of the product when the vessel's tanks are purged with CO_2 or N_2:

	Air		*Oxygen*	
Product	*(CO_2)*	*(N_2)*	*(CO_2)*	*(N_2)**
LPG	50	40	8	7
Petrol	50	40	8	7

*The percentages of nitrogen do not include the nitrogen of the air in the mixtures.

Example: If a vessel is going to load LPG and it is going to be purged with N_2, it must add sufficient N_2 to ensure that the mixture does not contain more than 40% by volume of air. The other 60% will be N_2.

Ref. Principles & Practices of Purging, 1954. American Gas Assoc. – Chapter 2, page 28.

FUEL: Heavy and medium marine diesel, intermediate fuel, and bunker "C" fuel oil are available in the area. Lubricating oils in limited quantities are also available from local contractors. All bunker, lubricating oils, water and other requirements should be cabled to the ship's Agent. For reasons of safety, no bunkers may be taken on the vessel while berthed at Bajo Grande.

FRESH WATER: Available at Maracaibo Harbour.

MEDICAL: Complete medical services are available in Maracaibo.

REPAIRS: Maracaibo: No major repair facilities are available, minor repair jobs can be taken care of through local machine and electrical shops. Shore labour can be furnished if required. Radio, radar and gyro compass technicians are available upon request.

Bajo Grande: No repair facilities are available, but when required, personnel from shops in Maracaibo will travel to Bajo Grande to effect repairs.

SHORE LEAVE: Launch service for official business purposes and emergencies is readily available in Maracaibo. Launch service for shore leave can be arranged through contact marine service and will be the responsibility of ship's personnel. Arrangements for shore leave transportation can be made through the ship's Agent. No shore leave facilities are available at Bajo Grande.

CONSULS: The following nations have Consular representation in Maracaibo:

West Germany
Belgium
Colombia
Costa Rica
Chile
Denmark
Ecuador
El Salvador
Spain
United States of America
France
Great Britain
Guatemala
Netherlands
Italy
Norway
Panama
Peru
Sweden
Switzerland

CLASSIFICATION SOCIETIES: American Bureau of Shipping and Lloyd's Register of Shipping, U.S. Salvage Association, Salvage Association of London, Det Norske Veritas, Bureau Veritas, Registro Italiano Navale, and Germanischer Lloyd have Agents in Maracaibo. Surveyors are available by appointment from any of these Agents.

CURRENCY: The Venezuelan unit of currency is the Bolivar (Bs) and is the only currency recognised as legal tender within the country. Masters desiring a cash advance should make the request to their Agent when advising ETA.

MAIL: Outgoing mail for ship's account may be given to the Agent's representative who boards the vessel on arrival at Maracaibo inbound. Personal mail will be accepted only if carrying the correct amount of Venezuelan postage, or if postage is authorised by the Master for the vessel's account.

GENERAL: *Maracaibo Port Captaincy:* Directive which must be observed by vessels entering and leaving Maracaibo Lake:

OBJECTIVES:

To increase the safety of Human Life at Sea, to take all necessary measures to avoid marine accidents in general and to ensure that vessels are navigated with safety in the navigable channels and waters of Maracaibo Lake.

1. All radio-telephone communications between the Control Offices of Maritime Transit under the control of the Port Captaincy of Maracaibo and vessels, shall be made, for the first contact, via Channel 16 (156.8 mc/s.) and immediately it shall be agreed that for the transmission of required information they will change to Channels 12 or 14. Also this procedure will be adopted in communication from ship to ship.

2. Any vessel which navigates in the vicinity of the buoy "EM" of the outer channel being 10 miles from the latter shall call the Pilot station at San Carlos, requesting permission to enter the zone and will supply the following information:

(a) Name and type of the vessel.
(b) Nationality.
(c) Draft.
(d) Last port of call
(e) ETA at the "EM" and "B-26" buoys.

3. The Port Captaincy will authorize by radio, via the Pilot station of San Carlos, to Masters of vessels who have reported to that station request to cross the outer channel, or part of it, with the assistance of the Official Pilot, in accordance with the sequence of arrival.

4. Every 5 miles, the Master of the vessel will call up San Carlos, indicating any information which he may have and giving his position within the channel, by reference to the buoys which are on his starboard side.

5. When communication in item 1 has occurred, San Carlos will inform the vessel as follows:

(a) The location of any dredger (mobile or stationary) which is operating in the outer channel, buoys whose lights are out, changes in buoys' positions or where buoys have disappeared, vessels which have sunk, etc.

(b) If there are vessels leaving the port, to give the position of these by reference to the odd numbered buoys.

6. Vessels shall establish radio-telephone communications with the dredger "Zulia" when they are 5 miles from it. In this communication, they will indicate the place they estimate that the vessel will meet the dredger and any other information which they consider necessary for the safety of navigation of both.

7. San Carlos will keep vessels informed of all the circumstances mentioned above, especially the time and place that each of them estimate to pass close to any dredger which is operating in the outer channel, and in order that they do not meet the dredger simultaneously.

8. Masters of vessels will inform the Pilot station at San Carlos of any other information which the latter may request.

9. Masters of vessels will keep a watch on Channel 16, on the order of the Official Pilot, until their arrival at port of destination in Maracaibo Lake and on leaving until the Pilot has left the vessel.

10. Pilots, when they are bringing a vessel into the port, at the level of the parallel of Palmas del Norte Point (Buoys T-55 and T-56), will call up the Port Captaincy and transmit the following information:

(a) Name of vessel
(b) Time
(c) Port where operations will be effected
(d) Name of Pilot calling.

11. When the vessel continues to navigate to the South of General Rafael Urdaneta Bridge, the Pilot will inform the Control Office of Maritime Transit in Maracaibo, the time at which the vessel will pass Buoy "B-79".

12. The average speed of vessel in the navigable channels will be ten (10) knots, Masters being authorized as are also Official Pilots, to alter this, when the safety of navigation may require it.

13. San Carlos will check by radio-telephone the transit of vessels from the entrance buoy "EM" to the level of the parallel which passes in front of Palmas del Norte Point (Buoys T–55 and T–56 and vice versa).

14. Loaded vessels navigating outwards, and being in the outer channel, will have priority over vessels coming in to the same channel, provided that these do not meet with those coming out in the critical zone, included between Buoys B–21 and B–22 and E–33 and E–34. For this purpose, the San Carlos Pilot station will inform entering vessels the situation of leaving vessels so that they may take necessary measures to avoid meeting those vessels coming out in the referred zone.

15. The Port Captaincy will check via the office of Control of Maritime Transit, the Navigation of vessels, from the parallel passing Palmas del Norte Point (Buoys T–55 and T–56), as far as the terminals and ports to the South of General Rafael Urdaneta Bridge and vice versa.

16. Every Official Pilot navigating outwards when passing the Buoy B–72, will call up San Carlos by radio-telephone and will supply the following information:

(a) The time that he is passing Buoy B–72.
(b) The time that he is arriving at San Carlos.

17. When the dredger receives any call from a vessel it will give information as follows:

(a) Location where it is at that time.
(b) Direction of dredging (South North or North South).
(c) The side on which the vessel must pass.
(d) Time necessary to make the manouevre indicating on which side of the channel dredging will continue after the manouevre.

18. The Pilot station at San Carlos will be attentive to all communications made and will take note of them, in the event that their intervention may be required by dredgers or by vessels.

19. Any vessel sailing from any port in the No. 2 pilotage area of Maracaibo, will inform the Port Captain as follows:

(a) Type and name of vessel.
(b) Where from and time of leaving the port.
(c) Speed and port of destination.
(d) Estimated time of passing Buoy B–72.

Signed – Port Captain.

Section B

LA ESTACADA: 10.42 N. 71.32 W.

(N.B. For important details of Documentation, Pilotage, etc., see "Maracaibo Lake").

OPERATORS: C.V.P./Llanoven.

LOCATION: Loading Terminal in the Lake of Maracaibo at La Estacada, located at 10° 42′ 30″ N. and 71° 31′ 40″ W. Entrance to and leaving this terminal is made between buoys B.65 and B.66.

DOCUMENTS: As soon as vessel is safely moored Agents representative will board the ship together with port authorities. The following documents are needed on arrival:

1. Clearance from last port consisting of:
   Sealed envelope from Venezuelan Consul in sailing port addressed to "Aduana de Maracaibo" and attached to the envelope:
      Store List
      Crew List
      Slop Chest Inventory
      Ballast Certificate
      All visaed by Venezuelan Consul in sailing port.
2. Crew List (6 copies).
3. Store List (6 copies).
4. Slop Chest Inventory (Deck, engines and cabin store listed separately) (6 copies).
5. List of Personal Effects (6 copies).
6. Deratization Exemption Certificate (original).
7. Venezuelan Net Tonnage Certificate (original).

See "Tonnage applicable".

The health officer sometimes requests to see the vaccination certificate of Crew members.

PILOTAGE: (See "Maracaibo Lake"). Pilotage Compulsory.

1. All vessels must call C.V.P./Llanoven and Agent of VHF Channel 16, when passing the E.M. Buoy and when embarking the Pilot at San Carlos.

2. Reduce speed approaching inner channel buoy B–63; rig accommodation ladder starboard side properly illuminated. Company Cargo Co-ordinator will board between B–63 and B–65.

3. Listen during transit on 2182 kc/s. and VHF Channel 16.

4. In event of unforeseen circumstances requiring vessels to anchor, area West of Estacada Northern Buoy mooring outside of channel limits will be used.

Vessels proceeding to La Estacada Terminal must enter the Outer Channel and embark the Government Pilot between buoys B–25 and B–27. After vessel arrives in the vicinity of the E.M. buoy, Master must contact San Carlos Pilot Station by radio-telephone on frequency 2182 kc/s. or VHF Channel 16 requesting Pilot between buoys B–25 and B–27.

Caution: Masters are warned to keep adequate speed in the Outer Channel even when embarking the Pilot as strong cross currents are encountered near San Carlos and Zapara Island. Pilot boats are fast and fitted with a flying bridge. Once the Pilot is on board the vessel will proceed to La Estacada, reducing speed in the vicinity of Inner Channel buoys B-63 and B-65 where C.V.P./Llanoven Cargo Co-ordinator will board. Accommodation ladder must be rigged up starboard.

MAX. SIZE: Water depth in both buoy moorings is 42 ft. mean monthly observed lowest water (MMOLW). Because of the depth of the surrounding approaches, 41 ft. (MMOLW), admissible midship's maximum draft in both moorings is 39 ft. freshwater. Under certain tidal conditions, however, with vessels over 60,000 d.w.t. and LOA exceeding 750 ft., it may be necessary to restrict loading to 38 ft. 6 in. Masters are requested to be guided by the Cargo Coordinator in appropriate draft to be loaded.

Berth No. 2 will accommodate vessels up to 850 ft. LOA, and Berth No. 1 up to 720 ft. LOA. Beam in both berths is unlimited.

RADIO: *Information to be cabled to Agent, Maracaibo.*

Upon vessel's departure from the last port bound for La Estacada cable 72–48 and 24 hours ETA at San Carlos Pilot station, including in this message last port, Master's name, if a.c. current on board and any requirements. If diverted, cable original destination, also have 5 copies of diversion cable ready on arrival. If the vessel is nominated to load a part cargo only at La Estacada, indicate at which port cargo will be completed. All cables should be sent via PJC (Curacao Radio) and via ITT All American Cables.

A separate cable should be sent to C.V.P./Llanoven, Maracaibo indicating ETA at San Carlos only.

BERTHING: *(a) Description:* Marine Oil Loading Terminal, is an offshore installation and consists of two permanent buoy moorings, No. 1 to the South, and No. 2 to the North.

Berths No. 1 and No. 2 consist of 4×14-ft. cylindrical steel buoys, each fitted with a pelican hook to which ship's mooring lines are attached by contractor's mooring launches. On each buoy there are 2×1.625-in. improved plow steel wirelines to supplement mooring lines in order to provide additional security during strong winds. In berth No. 1 the plow steel wires are 520 ft. long and in berth No. 2 585 ft.

Both berths are two directional; ships moored heading North or South according to prevailing current.

(b) Deballasting. There are no facilities at La Estacada to receive and treat dirty ballast therefore *same must be clean.* All ballast is discharged ashore through a 16 in. line.

(c) Mooring. All ships should have an adequate supply of stoppers or other special, equipment necessary to handle wires attached on mooring buoys. Vessels mooring in berths must be equipped with 4 ropes forward and 4 ropes aft. Vessels are cautioned that good quality ropes are essential and that they will be held liable for any damage occurring through improper or poor mooring ropes or inability to properly handle same.

Vessels in buoy moorings must have deck winches in readiness for use at all times. Method of berthing will be at discretion of the Government Pilot, as weather and other conditions permit.

During berthing and unberthing, ship's engines, tackle and all other gear must be in operative condition and in a state of readiness for use on immediate notice.

Weather permitting, and berths being available, vessels may be berthed at any hour of the day or night. Mooring buoys are properly lighted.

Government Pilots will assist in mooring the vessel in berth No. 1 or 2. Loading hoses can be connected both port and starboard side, according to ship's position. The Company Cargo Co-ordinator will remain on board ship to advise on connecting and disconnecting loading hoses, and loading of cargo.

The Government Pilot will later unmoor the vessel and take her out to the channel for departure.

Please keep in mind that he acts as adviser only and the Master retains full responsibility at all times. When ship is in position and mooring wires tautened, mooring winches such as tension winches must have their manual brakes put on securely, and should not rely on automatic rendering devices.

During time vessel is at the berth, frequent and regular inspection of mooring essential to ensure that mooring lines are kept taut and that movement of ship is kept to a minimum. When tugs are alongside or assisting a tanker, all cargo openings, permanent ballast tanks, lids and pump-room doors must be closed no matter what grade oil is being or has been carried, unless these spaces are gas-free.

The mooring operations are carried out by 2 mooring launches and 2 tugs.

TUGS: Use of 2 tugs of at least 1,600 h.p. is compulsory for mooring and unmooring at La Estacada (Government Decree). Use of 2 mooring launches with crew including a diver, who inspects the submarine loading hoses, is compulsory at La Estacada. These mooring launches remain alongside ship during stay in berth order act in any emergency.

TANK INSPECTION: As soon as all ballast is discharged and hoses connected, production supervisor or cargo co-ordinator will inspect ship's tanks. If same are dry and clean he will sign corresponding certificate.

LOADING: Berth No. 1 has 1×24 in. loading line with the corresponding manifold and Berth No. 2 also has 1×24 in. line. 12-in. – 150 lb. marine loading hoses are used. Each berth capable of a max. loading rate of 22,500 bbls.p.h., with an appropriate reduction for topping-off.

However, maximum loading rate entirely at Company's option and will vary according to circumstances and type of tanker concerned. When completing loading, stoppage of cargo will be determined on board, and Masters are requested to inform Cargo Co-ordinator at least 30 minutes in advance in order reduce pumping rate for topping-off. Cargo Co-ordinator will be in continuous contact with pumping station by means of portable radio. Should this means of communication fail, the following signals on ship's whistle will apply:

One long blast	Stand by
Two long blasts	Commence pumping
Three long blasts	Stop pumping

Upon completion of loading, Cargo Co-ordinator, together with ship's officer, will gauge ship's tanks and later prepare cargo documentation.

FUEL: Bunkers and marine fuels supplied by barge before or after loading operation at anchorage. Agent should be given prior notice.

FRESH WATER: Must be ordered with first ETA cable to Agents so that arrangement can be made with supplier. A water barge and a tug must be hired.

DENSITY: 997–1003.

REPAIRS: Only smaller repairs can be effected locally; however, technicians available for radio and radar repairs. Contact Agent.

SURVEYORS: American Bureau of Shipping and Lloyd's Register have Agents in Maracaibo.

CONSULS:

The following have consular representatives in Maracaibo:

Belgium
Chile
Colombia
Costa Rica
Switzerland
Denmark
Ecuador
Sweden
El Salvador
France
U.S.A.
Germany (West)
Great Britain
Guatemala
Italy
Mexico
Netherlands
Nicaragua
Norway
Panama
Peru
Spain

SHORE LEAVE: Launch is primarily for use of authorities and company staff, but will effect trips for crew if required by Master. Contact Agent who will make necessary arrangements.

GUARDS: One National Guard stationed on board. He must be provided with sleeping quarters and seated in officers' mess for meals.

He is the representative of the Venezuelan Government and therefore any courtesy extended to him will be appreciated.

CLEARANCE: Immediately after termination of loading operations, hoses are disconnected and Government Pilot will proceed to unmoor vessel. In the meantime, cargo documents are prepared by Terminal personnel, and as soon as vessel is cleared, she will proceed to her destination.

CURRENT/TIDE: Current velocity max. 4 knots. Nature of bottom, mud. The tidal range in feet for the Estacada Terminal is springs 1.5, neaps 0.5.

GENERAL: *(a) Cash Advance.* Cash advance will be in local currency (Bolivares). Cable in advance any such requirements to Agents.

(b) Mail. Outgoing correspondence may be given to the marine dispatcher. For personal mail (crew) a list should be made, indicating name of Crew member, quantity of letters and destinations, and handed to Agents.

(c) Ship Chandlers. 2 ship chandlers in Maracaibo who can supply vessels with fresh meat, fish, vegetables, fruits, etc. Requirements should be transmitted in first ETA cable to Agents.

TONNAGE APPLICABLE:

The Venezuelan Port Authorities base part of their pilotage charges on the size of the vessel, i.e. on registered net tonnage or on Venezuelan net tonnage.

On Registered Net Tonnage:

Venezuela will accept the tonnage of ships registered in countries with which they have a reciprocal tonnage agreement.

As of this date, such countries are:

Norway
Sweden
Ireland
Denmark
Netherlands
France
Germany
Portugal
United Kingdom
U.S.A.

On Venezuelan Net Tonnage:

Ships not registered in countries listed above, when calling at Venezuelan ports for the first time, must be measured for Venezuelan tonnage by the Captain of the Port. It is the usual practice to take ashore the ship's Panama Canal or Suez Canal Certificate, which is used as a basis for recalculating tonnage under the Venezuelan regulations, and return it before sailing. The Venezuelan admeasurement certificate, when later issued, is forwarded to the owners. A fee is charged for this certificate, which is payable only on the ship's first call.

Section C

LA SALINA (Lacustre): 10.22 N. 71.28 W.

(N.B. For important details of Documentation, Pilotage, etc., see "Maracaibo Lake").

OPERATORS: All terminal facilities are under the control of Lagoven, S.A.

APPROACH: Entrance and leaving this terminal is made between buoys B.97 and B.98.

LOCATION: La Salina located on Eastern shore of Lake Maracaibo, in Lat. 10° 22′ 18″ N., Long. 71° 27′ 49″ W.

CARGO DOCUMENTS: These are generally placed on board prior to departure. Vessels whose Master accepts the early departure procedure may sail with documents in blank. Figures are then radioed for inclusion in blank documents. Outward clearance documents are placed on board the vessel prior to departure.

PILOTAGE: In the event that no contact can be made with San Carlos pilotage station, or if there is a language problem, contact should be made with Vensport, at La Salina by voice radio on VHF Channel 16 (156.6 mc/s.).

A vessel entering or leaving the harbour must be assisted by a Government Pilot, an inbound vessel being boarded by him at the anchorage area approximately 3 miles off shore.

ANCHORAGE: For vessels awaiting berth there is an anchorage area located West of a line between rig L–175 to buoy S3 and the light buoys M1, M1A and S1 (chart No. MO–G–4–C) about 3 miles West of the loading terminal in 6 to 7 fathoms of water with a mud bottom.

RESTRICTIONS: None. The port is open for navigation during the day and night, allowing ships to enter and sail at any hour.

MAX. SIZE: Up to 112,000 d.w.t. LOA 900 ft. and max. draft 39 ft. (FW) at Berth Nos. 6N, 6S, 7N and 7S.

Pier No. 3 (West Side) LOA 690 ft., draft 26 ft. (FW) and 36,000 d.w.t.

Pier No. 3 (East side) LOA 575 ft., draft 26 ft. (FW) and max. d.w.t. 18,000 tons.

No restrictions on vessel's beam at any of the berths. An increase of draft to 41 ft. is expected in 1979 at berths Nos. 6 and 7.

The access channel to La Salina has a least depth of 41 ft.

Special Note: Maximum draft for loading vessels at La Salina Lacustre Terminal is actually restricted to 39 ft. Vesels loading at this maximum draft of 39 ft. must cross the outer bar channel at HW.

RADIO: The cable and telegraphic address for the Lagoven, at La Salina is "Lagoven La Salina". Radio messages to and from ships at sea are routed through the Government radio station at Maiquetia (La Guaira) call letters YVG. This station operates on a 24 hour continuous watch, on the following frequencies: Listening frequencies: long wave: 500 kc/s.; short wave: 4178–6267–8356–12534–16712–22225 kc/s.

Transmitting frequencies: long wave: 500–472–464–417 kc/s.; short wave: 17141.6–12817.5–8730–8722–6519.5–6505.5–4352–4322 kc/s.

Radio notice of arrival should be sent 72 hours prior to arrival at La Salina and corrected if weather or other conditions delay the vessel.

La Salina Port Services section maintains radio-telephone listening watches on a 24 hour basis on following frequencies: 2182 kc/s., 156.8 mc/s.

Frequencies 2638 kc/s., 2738 kc/s., 2120 kc/s. and 156.6 mc/s. are available for use after initial contact on one of the above listening frequencies.

All vessels en route to La Salina may also communicate with Lagoven Amuay or Caripito Marine offices and request that messages dealing with corrected ETA's, Pilots and other business be relayed to the La Salina Marine Office.

TUGS: Lagoven S.A. maintains one 3,000 h.p. diesel tug and one 1,600 h.p. diesel tug. Tug-boat assistance is considered essential and is afforded all vessels entering, leaving or shifting in the harbour.

BERTHING: At La Salina, Lagoven maintains a deep-water terminal (Lacustre) consisting of an island where are located 2 finger piers, each 1,100 ft. in length and 500 ft. between piers, providing 4 berths to accommodate tankers up to 112,000 d.w.t. Berths are numbered 6N, 6S, 7N and 7S, from North to South. At these berths various products can be loaded simultaneously namely – 6N and 6S – Crude, Naphtha and Butane; 7N and 7S – Crude; Pier No. 3 (West side), Propane and Butane; Pier No. 3 (East side), same as West side but not concurrently with West side. In addition there is an offshore platform (Pier No. 3) where liquefied petroleum gases (Butane and Propane) can be loaded.

Instructions concerning berthing are given by Port Services Section by means of radio-telephone.

The use of an anchor when docking is permitted at all berths. It is considered prudent to have the outboard anchor hove-out prior to entering the harbour in order to facilitate speedy release if necessary while docking. The Pilot will advise whether the ship is to be berthed port or starboard side to the dock.

BALLAST: Vessel should arrive at La Salina with sufficient ballast to permit safe handling. Government Pilot requirements in this connection under normal weather conditions are interpreted as drawing approximately 8 ft. forward, 18 ft. aft, on a T–2 or similar type tanker, and 11 ft. forward, 20 ft. aft on a 26,000 d.w.t., on larger type vessels the minimum draft required is 14 ft. forward and 22 ft. aft.

Ballast should be carried in a minimum number of tanks, and all other tanks stripped, so as to minimize deballasting time.

It has been established that one of the major causes of contamination of crude oil is the relatively small amount of salt water remaining in the ship's tanks, pumps, and ballast lines after ballast discharge. This very small amount of salt, nevertheless, frequently results in costly damage and downtime to refining equipment, besides presenting many other processing problems.

It is therefore requested that the full co-operation of the Master and Officers of ships loading for Aruba, be given to ensure that all ballast tanks and lines are flushed with lake water and stripped as dry as possible.

Vessels equipped with a separate and completely segregated system of ballast tanks, lines and pumps, will be permitted to discharge ballast and load cargo simultaneously, providing approval of both the pier foreman and Petroleum Inspector is secured.

A pier supervisor who is in direct communication with the loading pumphouse is stationed at each pier during the entire time the vessel is discharging ballast or cargo or receiving cargo.

All dirty or clean ballast must be pumped ashore. A 34 in. ballast line, with dirty ballast treating facilities are available.

If it is desired to follow the "load-on-top" procedure it is requested that the marine representative be informed on arrival.

LOADING: Instructions as to grade or grades of cargo, and the approximate loading rate anticipated, will be given to the Master on arrival. Supplementary information including number and size of lines and Chiksan arms will be furnished to the Chief Officer before loading commences. Loading rates will be reduced as required when topping off.

If vessel's loading orders from owners or charterers do not agree with the terminal's orders, either as to grades or quantity, the marine representative should be advised immediately. The terminal is authorised to load 10% more or less than the quantity nominated.

A terminal employee is stationed at each pier during the entire time the ship is discharging ballast, bunkering, or loading cargo. Fifteen minutes "standby" notice should be given to this man prior to completion of ballast, bunkers, or cargo.

Shut-down controls for all crude oil pumps are available at each loading berth at ship's rail of loading vessels for use in case of emergency only.

LOADING RATES: Loading operations at La Salina Terminal are normally carried out at relatively high pumping rates; up to an average of 40,000 b.p.h. Ship's officer will be advised by the pier supervisor at what rate the cargo will be loaded. LPG is loaded up to an average max. rate of 7,500 b.p.h. at Platform No. 3.

The loading and discharging of all crude petroleum and its products will be stopped during the passage of an electric storm, and ullage covers must be closed and dogged down. During periods of calms, loading of gasoline or other similar low flash products may be at lower rates or loading stopped if the heavy vapours are not being dispersed quickly enough to prevent hazards from accumulated gas pockets. Ships' officers are cautioned to be on their guard during such conditions.

Loading rates will be reduced when topping off, if requested by the ship's officer.

MEDICAL: Complete medical, dental and hospitalisation facilities are available at La Salina. Medical treatment is provided at a private clinic.

Authorisation forms for medical treatment are provided which require the Master's signature. Transportation will be supplied by Port Services Section.

If the patient does not speak Spanish or English, an interpreter should accompany him.

FRESH WATER: A limited supply of fresh and boiler water is available at La Salina Lacustre Terminal. Delivery is made through 2.5 in. National Standard Fire Hose Thread hydrants. Ship's personnel must provide hoses and connect up.

FUEL: Bunker C fuel oil, marine diesel and intermediate fuels are available at La Salina Terminal Lacustre. Delivery is made alongside Piers 6 or 7 by 8 in. diameter Chiksan hose, located about midship's.

It is the responsibility of the ship's engineer to give "stand-by" notice to the terminal employee and advise him when to shut down.

Supplies of lubricating oils are available. Delivery will be effected while loading and requirements should be incorporated in the ETA radio.

DENSITY: The average density at the berth is 1002 but varies dependent upon amount of rainfall. The temperature ranges from 82° to 86°F.

REPAIRS: The Marine Port Staff will assist with emergency repairs as may be required in each case depending upon availability of competent personnel and equipment. The company's shop facilities while not equipped for extensive ship repairs, may be made available to fabricate or repair items that are urgently required.

The nearest dry docks are those at Puerto Cabello and Curacao, N.A. Several contractors in the area provide labour for hull painting and for tank cleaning. Contracts for these services are made by the ship's Master directly with the contractor.

Radio technicians are available for minor repairs. With sufficient advance notice a radar specialist can be arranged to board the ship at La Salina.

CONSULATES: The following countries have consular representatives in the area:

Belgium
Chile
Colombia
Costa Rica
Denmark
Dominican Rep.
Ecuador
El Salvador
France
Germany (West)
Great Britain
Guatemala
Italy
Netherlands
Norway
Nicaragua
Panama
Peru
Spain
Sweden
Switzerland
U.S.A.

SHORE LEAVE: Shore leave is permitted and a representative of the Captain of the Port boards on arrival and issues the required number of passes. Shore passes are to be collected prior to sailing, and given to Pilot undocking the vessel. Vessels are not permitted to sail until all crew members are on board, unless hospitalised or prior arrangements made for disembarking. No launch service for liberty parties is available while vessel is anchored off La Salina awaiting berth.

GENERAL: Representatives of the Marine Department board vessels immediately on arrival, and it is particularly requested that Masters indicate at that time all ships requirements. The Marine Office Building is located at the Pierhead Trestle and personnel are available for assistance at all hours.

(a) Bonded Stores. Cigarettes or other stores in bond are not obtainable in La Salina.

(b) Cash Advances. Cash advances are made in local currency, the Venezuelan Bolivare. Cash requirements should be included in the ETA radio.

(c) Charts. On first arrival of each tanker, the Marine Dispatcher will furnish a set of local charts if required. No supplies of U.S. Hydrographic or British Admiralty charts, or sailing directions, are available.

(d) Classification Societies. American Bureau and Lloyd's Register have non-exclusive Agents in Maracaibo, and qualified Masters and Chief Engineers are available for appointment as Surveyors when required.

(e) Gangways. All vessels using the port of La Salina must provide a safe gangway. The use of rung ladders, Pilot ladders, etc., is contrary to port regulations and port authorities will not board except by means of a safe gangway or accommodation ladder.

(f) Plimsoll Marks. the Captain of the Port requires that the Plimsoll Marks of all vessels using the port be clearly visible. Vessels may be checked on completion of loading, and if the Plimsoll Marks are not readily legible, permission to sail may be withheld.

(g) Port services. On arrival at La Salina terminal, a company representative boards vessels, so it is particularly requested that Masters make known to him all ship's requirements. Master should bear in mind that while vessels are within Venezuelan territorial waters, Government authorities do not permit the use of ship's radio equipment. Cables and radiograms should be handed to the company representative for transmittal via shore radio communication system. La Salina also has radio telephone communication with North and South America and Europe. For further information contact Port Services Section in the terminal building, tel. 88694 and 88695.

(h) Rat-guards. By order of the Port Authorities, vessels are required to use ratguards on all mooring lines.

(i) Personnel – Seamen left ashore. In the case of seaman left ashore for hospitalisation, repatriation or other reason, his documents and personal effects are to be delivered to the Marine Office in La Salina before sailing. A letter is required from the Master advising maximum advances to be made to seaman if any, and instructions concerning his repatriation. All expenses incurred by seamen left ashore, including cost of repatriation, are for ship's account.

It is important that Masters bear in mind that the Venezuelan law will at all times hold the vessel, her Master, Agent or Owner, responsible for any seamen left behind in Venezuela.

(j) Provisions and stores. Fresh and dry provisions are supplied by various shipchandlers in Maracaibo and Cabimas (La Salina). Master should deliver his signed requisition to the Marine Department representative who boards on arrival. Provisions would then be delivered to the vessel while loading. The prices and quality of some items, such as fresh fruit, fish, shrimps, vegetables, etc., are competitive; dry stores are considerably higher than in most ports. The Fleet Steward will assist in filling requisitions. It is important that the Master sign the ship-chandlers invoice as authorisation for the Marine Department to make settlement.

(k) Mail. Any pending ship's mail will be delivered on board by the Marine Dispatcher on arrival at La Salina. At same time he will receive ship's mail to be dispatched. The Marine Dispatcher will accept personal mail only if it carries the proper amount of Venezuelan postage, or if Master authorises the postage by signing 7 copies of the Company Postal Transmittal form. Masters interested in knowing the individual postage amounts to be paid by each crew member, should provide a list, in duplicate, of the senders, and number of letters sent by each one identified by a number written on each letter.

Copy of this list will be returned aboard the vessel when leaving this port outward bound. If not ready on time, it will be airmailed to the vessel's next port of call.

(l) Inspection of Petroleum Products and Crude Oil. Chas. Martin & Company and E. W. Saybolt petroleum inspectors are available if specified.

(m) Laundry. Laundry service is available between 0700 and 1700 hrs. on week-days. No guarantee can be given on time of delivery.

Section D

MARACAIBO: 10.42 N. 71.39 W.

On the N.W. shore of the Lake Maracaibo.

Maracaibo is the capital of the State of Zulia and seat of all Government and Consular Offices, as well as the port of entry for all vessels loading at one of the Terminals in the Lake of Maracaibo. (N.B. For information details of Documentation, Pilotage etc., see "Maracaibo Lake").

ANCHORAGE: The Pilot will not con the ship into the anchorage, but will indicate the proper location to anchor. Care should be taken because of small boats and ferry traffic.

ACCOMMODATION LADDER: Vessels must provide an accommodation ladder. The use of trunk ladders, pilot ladders, etc., is contrary to port regulations. Port authorities will board only by means of an accommodation ladder. It is recommended to rig this in advance to avoid unnecessary delays.

BOARDING PARTY: The boarding party usually consists of the following persons: One Quarantine Official, Two Customs Officials, One Port Captain's Representative, Two representatives (Agent and Mooring Master).

RADIO: "Radio Marina" transmits information of interest to navigation every day from Monday to Friday from 1000 to 1015 hrs. and from 1600 to 1615 hrs. on frequency of 4,420.7 kHz in the 60 m. band, output 1 kW. All bunker, lubricating oils, water and other requirements should be included in the cable giving ETA of the vessel.

TUGS: Service not compulsory, assistance is rendered if required by the Harbour Master.

BERTHING: The manoeuvring area within Maracaibo harbour has a depth of 26 ft.

		Length	Depth alongside
Wharf No.	1	106 m.	15 ft.
,, ,,	2	106 m.	15 ft.
,, ,,	3	159 m.	15 ft.
,, ,,	4	159 m.	22 ft.
,, ,,	5	135 m.	25 ft.
,, ,,	6	135 m.	26 ft.
,, ,,	7	135 m.	26 ft.
,, ,,	8	135 m.	26 ft.
,, ,,	9	120 m.	25 ft.
,, ,,	10	120 m.	22 ft.
,, ,,	11	120 m.	22 ft.
National Brewery Wharf		125 m.	19 ft.
Regional ,, ,,		120 m.	21 ft.

FUEL: Heavy and medium marine diesel, intermediate fuel, and bunker C fuel oil are available at Maracaibo from local contractors with barges. Supplied only by barge at the wharves or anchorage. Lubricating oils are also available.

FRESH WATER: All wharves supplied with fresh water by 2 in. hoses. Rate 15/20 t.p.h. Fresh water also available from local contractors with barges.

MEDICAL: Complete medical services are available.

CONSULS:

	Telephone		Telephone
Germany	76061	Netherlands	4621
Belgium	3235	Great Britain	6169
Colombia	72232	Italy	
Costa Rica	6511	Mexico	6781
Denmark	6531	Nicaragua	76703
Ecuador	74055	Norway	78911
El Salvador	74241	Panama	78110
Spain	71118	Peru	4545
United States	2123	Portugal	80870
France	5297	Dominican Rep.	6511
Guatemala	71193	Sweden	6511

STEVEDORES: Normal working hours 0700–1100; 1300–1700 and 1800–2300 hrs.

TELEPHONES: There is no service for connecting telephones on board vessels. Public telephones are situated in the warehouses adjacent to all wharves.

HOLIDAYS: All Sundays; 1st January; Good Thursday and Friday; 19th April; 1st May; 24th June; 5th July; 24th July; 12th October; 24th October; 18th November; 17th December; 25th December.

POLICE/FIRE/AMBULANCE: Police tel. 3821; Fire tel. 6585; Ambulance tel. 2209.

REPAIRS: No major repairs facilities are available; however, repair jobs can be done through local machine and electrical shops, and shore labour can be furnished if required. Radio and radar technicians are also available.

SHORE LEAVE: Launch service in the Maracaibo harbour is readily available for official ship business. For shore leave personnel, depends on launch availabilities on arrival.

AIRPORT: International Airport "Granode Oro" situated N.W. of Maracaibo City served by many national and international airlines. A second airport with cargo and passenger services is situated at Santa Barbara del Zulia, on the banks of the Escalante river.

PROVISIONS: Fresh and dry provisions are procurable through ship chandlers in Maracaibo for delivery at Maracaibo Harbour or at the terminal.

SHIPMASTER'S REPORT: 1976

Communication: Considerable difficulty was experienced raising La Guaira radio station (YVG) for transmitting the necessary ETA's. Our messages were transmitted via Portishead (GKR). Agents, however, advised that messages are normally transmitted through Curacao (PJC).

Pilotage: Masters making their first visit to the port are to embark the Pilot at Punta Cardon (Paraguana Peninsula). Ample notice must be given to the Agents as the Pilot has to be flown there from Maracaibo. Masters making their first visit to Maracaibo must also disembark the Pilot at Punta Cardon on departure. Masters may thereafter proceed directly to San Carlos pilot station.

As previously reported the VHF station at Punta Cardon manned by 'Compania Shell' is no longer operational. Communications can now be made through the Harbour Master's Office Punta Cardon.

Delays experienced off Punta Cardon as previously reported did not occur on this particular occasion. Pilot boards and normally rests in the pilots cabin until 30 minutes from the "EM" buoy.

Berthing: 2 tugs are compulsory for vessels berthing/unberthing when the vessel's length exceeds 476 ft. All other vessels 1 tug compulsory.

National Guard: A member from the National Guard is placed on board the vessel during working hours. A room has to be at his disposal (*not* the hospital) and necessary food and beverages supplied.

Stevedoring:

Normal working hours
(Monday–Friday) 0700 to 1100 hrs.
1300 to 1700 hours
1800 to 2300 hrs. (Overtime)
(Saturday) 0700 to 1200 hrs.
(Sundays & Public Holidays) *No work.*

Vessels must be fully rigged and hatches open and ready in all respects to load or discharge at least 15 minutes before stevedores arrive. If necessary shore labour is available to assist.

SHIPMASTER'S REPORT: 1975.

Arrival messages: Cable Agent – Maracaibo via La Guaira Radio on departure Cristobal with ETA Punta Cardon, draft, cargo stowage, gang required and requirements. (For subsequent calls vessel will be permitted to proceed to San Carlos pilot station to embark Pilot).

24 hours prior to arrival repeat ETA Punta Cardon, to be sent as described above.

2 hours before arrival pilot station – Punta Cardon call Compania Shell on Channel 12 VHF to update time of arrival. (See report above, station no longer in operation).

Pilotage: Pilot boards at Punta Cardon about 1 mile off the tanker berths from a launch with a "roof landing", therefore the pilot ladder must be about 6 ft. from the water. This Pilot travels from Maracaibo to meet the vessel at Punta Cardon and takes the vessel all the way to Maracaibo. Punta Cardon to "EM" Fairway buoy – 78 miles. "EM" Buoy to Maracaibo – 35 miles.

Once the vessel has made a call at Maracaibo the Master is then exempt and may take his vessel direct to the "EM" buoy and negotiate the buoyed channel for 12 miles to San Carlos pilot station. The channel is straight, wide and the buoys are well lit and marked. A Westerly set is said to prevail across this channel from the "EM" buoy to San Carlos pilot station but it was not evident on our passage in or out. However, a strong ebb tide was noticed running out to sea off San Carlos pilot station. The channel from the "EM" buoy to Maracaibo is dredged to 41 ft. but off the berths at Maracaibo the maximum draft is 26 ft. There had been a lot of unseasonal rain prior to our call and we noted that the density of the dock water was 1001.

Documents:

1 Health Declaration.
8 Stores Lists.
8 Crew Lists.
6 Passenger Lists (If no passengers these papers have to be entered as "Nil" passengers).
8 Crew Declaration Lists.
2 Venezuelan Manifests (Sent from N.Z.)
2 Sets Bills of Lading (Sent from N.Z.)
12 Sets Tally Books (Sent from N.Z.)

Stevedores: "Servicios Portuarios De Maracaibo".

They have 24 gangs in the port and mechanical equipment to support 16 gangs. Normal working hours are 0700–1130 – 1300–1630 hrs. Overtime 1800–2230 hrs. Saturday 0700–1200 hrs. No work on Sunday.

The labour works well but is not accustomed to working refrigerated ships and when the gangs work into the wings the Agent had to supply the men with warm clothing and hot coffee. Their discharge rate for cartons of frozen cream was 18 t.p.h. In hindsight I would suggest that it would be advisable to stow frozen cream for Maracaibo in a hatch square if possible to obviate the need for the labour to go into the wings as the complaint about the "cold" does not arise until this happens. They had 14 open trucks laid on to take the cartons of cream direct to the butter works and they had an unbroken flow so the "hook" was not held up on this account.

Berthing: There are berths for 6 ocean going ships and they say they can berth these ships up to 26 ft. Tugs are available and because of berthing starboard side to we used 2 tugs. The berths are concrete with rubber fenders and there is plenty of working space for the mechanical vehicles. The Pilots speak a little English but sufficient to make themselves understood and are capable. Fresh water is available alongside but I understand if bunkers are required they have to be brought by barge and there is a minimum charge of $1,000 irrespective of the amount of fuel required. They have a repair facility which is in the hands of a local engineering company. Fresh vegetables are available and can be recommended, supplied by the only providore. He maintains a listening watch on Channel 16 VHF and has a liaison with Agents for any messages sent prior to arrival at the berth. His station is called Automercado Venezia.

AGENT: Head Office, (Management and Control), Brokers, Chartering and Tramp Agents, Victor H. Selinger S.A., PO Box 1632, Caracas 101 Venezuela. Cables "Selvic" or "Seltank". Tel. (02) 81.02.71 Telex: 21402, 21631, 21934 and 22859.

Local Office: PO Box 496, Maracaibo. Tel. (061) 224960. (061) 224962. Cables: "Seltank Maracaibo", or "Selvic Maracaibo". Telex: 62166.

EL TABLAZO: 10.45 N. 71.32 W. (See Plan Book)

(*N.B.* for important details of Documentation, Pilotage, etc., see "Maracaibo Lake".)

OPERATORS: C.V.P./Llanoven.

LOCATION: S.E. part of Puerto Miranda. Entrance by buoys 63 and 64. Distance from San Carlos Pilot Station 16.5 miles.

MAX. SIZE:

	Depth alongside MMOLW ft. in.	*Depth approach channel ft. in.*	*Max. recom-mended Draft ft. in.*	*Max. d.w.t.*	*Max. LOA ft.*	*Limiting Factor*
Solids Dock:						
North Berth (Urea in bulk)	30 00	31 00	30 00	50,000	656	Draft
South Berth (Urea in bags)	31 06	32 00	31 06	50,000	820	Draft
South Berth (General Cargo)	Not operational at time of report			50,000	656	Draft
Liquids Dock:						
North Berth	32 00	32 00		50,000	787	Draft
South Berth	29 09	31 06		50,000	787	Draft
Salt Dock:	20 06	21 00	20 06	3,000	270	d.w.t.
Heavy Cargo Dock:	14 00	12 00	14 00	No limit	196	Draft

Remarks: Ships willing to wait for tide may add height of tide to maximum recommended draft.

BERTHING:

	Length of Berth ft.	*Width of Pier ft.*	*Height of Pier above MMOLW ft.*	*Mooring Lines Bow Stern*	*Products Handled*
Solids Dock:					
North Berth (Urea in bulk)	735	34	11.5	2 head–2 stern	8–14–18
South Berth (Urea in bags)	974	34	11.5	1 breast–1 breast	7–14–18
South Berth (General Cargo)	738	34	11.5	1 spring–1 spring	14–18
Liquids Dock:					
North Berth	856	14.7	11.8	2 head–2 stern	6–5–12–17
South Berth	856	14.7	11.8	2 breast–2 breast 1 spring–1 spring	6–5–12–17
Salt Dock:	364	43	10.5	2 head–2 stern 1 breast–1 breast 1 spring–1 spring	11–12
Heavy Cargo Dock:	196.8	295	—	—	18

Products Handled: 1. Ethylene; 2. Propylene; 3. Propane; 4. Butane; 5. Nat. Gasoline; 6. Anhydrous Ammonia; 7. Urea in Bags; 8. Urea in Bulk; 9. Chlorine; 10. Caustic Soda; 11. Salt; 12. Styrene Monomer; 13. Monovinyl Chloride; 14. Potable Water; 15. Inert Gas; 16. Ballast Water; 17. Methanol; 18. General Cargo.

Products to be handled:

Natural Gasoline	at 687 t.p.h.		
Estirene	160		
Methanol	687		
Isobutane	687		
Ammonia	525	,,	temp. −33.3°C
Propylene	40	,,	40°/6°C
Butane	160	,,	37.8°C
Monovinyl Chloride	420	,,	37.8°C
Ethylene	80	,,	−104°/−70°C

Cargo Equipment:

North Berth: One urea in bulk loader
Cargo capacity 650/700 t.p.h.

South Berth: Three urea in sacks conveyors.
Cargo capacity 2,400 sacks of 50 kgs each per hour.

FRESH WATER: Available, 8 t.p.h., but expensive.

DENSITY: 997–1003.

PUERTO MIRANDA: 10.46 N. 71.34 W. (See Plan Book)

(N.B. For important details of documentation, Pilotage, etc., see "Maracaibo Lake").

LOCATION: Situated at Eastern shore of entrance to lake of Maracaibo, in position Lat. 10° 46′ N., Long. 71° 34′ W.

OPERATORS: Maraven, S.A.

CLEARANCE: Pratique and Custom's clearance will be granted on arrival either at the anchorage or after the vessel has been berthed. Masters therefore requested to have the accommodation ladder ready on arrival to avoid delays, since the Government Officials do not board the vessels by pilot ladder.

On arrival when pratique is requested, all vessels should fly International flag signal "Q", or show a yellow light during hours of darkness.

PILOTAGE: On arrival Puerto Miranda under Government Pilot's advice the vessel will be boarded by Government Berthing Master, who will assist Master in docking vessel. He will also assist in undocking.

CHANNEL: Channel has a leading mark formed by the towers "P" and "M" and is marked by buoys.

(1) Incoming traffic bound for Puerto Miranda must leave the main channel between the buoys B-57 and B59 towards the anchorage.

(2) Vessels coming from the Lake in ballast or to complete cargo at Puerto Miranda must leave the main channel when passing the buoy B–65 on their starboard side and proceed in the direction of Jetty 3 towards the anchorage.

(3) All vessels on leaving Puerto Miranda should enter the main channel by the buoyed exit channel marked by the buoys numbered AP3, AP2, AP1 and B59.

Once the ship is unmoored, the Berthing Master on duty at Puerto Miranda will emphasise to the official Pilots the route to be followed in each case.

MAX. SIZE: See "Berthing".

RADIO: Port Services Office equipped with radio-telephone installation operating on 24 hours basis, transmitting on following frequencies (simplex press to talk system).

		Int. VHF Channel
Approach calling and safety	156.8 mc/s	No. 16
CSV and other tankers port operations	156.6 ,,	No. 12
Emergency calling	2182 kc/s	

ARRIVAL ADVICE: Vessels equipped with radio-telephone installation operating on above frequencies are requested call Puerto Miranda about 3 hours before arrival at port. Calls made in Spanish language will be answered promptly, since there is always a Spanish-speaking clerk on duty. Calls in English will be answered by Berthing Master on duty, except when he is occupied, in which case the call should be repeated later on, as an alternative, the Master could ask Government Pilot to report in Spanish his vessel to Puerto Miranda. During hours of darkness all vessels must identify themselves on arrival, either by radio-telephone or Aldis lamp.

TUGS: 2 motor tugs of 2,800 h.p. assist all vessels in docking and undocking. Also one or two mooring launches will be standing by to take ropes.

BERTHING:

Jetties/Berths	*Depth M.M.O.L.W. ft.*	*Maximum Permissible Draft ft.*	*Length ft.*	*Displacement tons*
Jetty No. 2				
1 (North Outer)	38	36	720	90,000
2 (South Outer)	38	36	720	90,000
3 (North Inner)	35	34	†575	62,000
4 (South Inner)	35	34	‡575	62,000
Jetty No. 3				
5 Inshore (North Seaward)	38	36	910	90,000
	38	36	910	90,000
	38	36	910	90,000
6 Inshore (South Seaward)	38	36	910	90,000
	38	36	910	90,000
	38	36	910	90,000

The port is being dredged at the present time (November 1978) and when finished (approx. end January 1979) the new sailing drafts from the terminal will be 39 ft.

Maximum size acceptable based on particulars above.

Jetties/Berth	*Type of vessel S. dwt*	*Governing Factor Draft*	*Length*	*Displ.*	*mooring lines to be used Forward*	*Aft.*
Jetty No. 2						
1 (North Outer)	44,000	x	x		9 (7)*	7 (5)*
2 (South Outer)	44,000	x	x		9 (7)*	7 (5)*
3 (North Inner)	22,000		x		7	7
4 (South Inner)	22,000		x		7	7
Jetty No. 3						
5 Inshore (North Seaward)	115,000	x	x	x	7 (5)*	7 (5)*
	90,000	x		x	7 (5)*	7 (5)*
	70,000	x			7 (5)*	7 (5)*
6 Inshore (South Seaward)	115,000	x	x	x	7 (5)*	7 (5)*
	90,000	x		x	7 (5)*	7 (5)*
	70,000	x			7 (5)*	7 (5)*

Remarks: Alongside UKC for ships up to 700 ft. O.A.L. = 1 ft. Alongside UKC for ships over 700 ft. O.A.L. = 2 ft.

(*) When vessels are fitted with tension winches-Forward and Aft.

(†) O.A.L. in Berth No. 3: This can be increased up to 620 ft. whenever vessels of Berth No. 1 have O.A.L. up to 665 ft.

(‡) O.A.L. in Berth No. 4: This can be increased only for LPG vessels up to 610 ft. if Berth No. 2 or 5 are empty when vessel arrives, then Berth No. 2 has to be temporarily restricted to vessels up to 665 ft. O.A.L.

General: Nature of bottom soft mud, but near buoys B-59 and AP-1 is partly hard.

Density of Water at Berths 997-1003.
Density of Water outer channel 1015-1025.

These alongside drafts are subject to reduction owing to depth in inner and outer channels.

Recommended under keel clearance (UKC) in Exit Channel 2 ft. Vessels drawing 37 ft. and over will according to monthly sailing draft table issued by Maraven, S.A.

BALLAST: Discharge of oil or water polluted by oil into lake waters is prohibited and will incur heavy fines and compensation to beach owners and fishermen for cleaning nets.

All dirty ballast must be discharged ashore. Clean ballast in cargo tanks may only be pumped overboard after prior consultation with Port Services Dept. Deballasting line pressure must not exceed 100 lb. p.s.i. Vessels equipped with a special separate and clean ballast system are to discharge their ballast into lake.

Ocean vessels should be ballasted on arrival E.M. Buoy for inward passage with minimum ballast necessary for safe handling, taking into consideration Article 31 of Maracaibo Pilotage Zone Regulations, which states all vessels entering lake Maracaibo shall have a trim of no more than 8ft., to permit safe navigation through channels.

One of the major causes of contamination of crude oil is relatively small amount of salt water remaining in ships tanks, pumps and ballast lines after ballast discharge. This very small amount of salt, nevertheless, frequently results in costly damage and down-time to refining equipment, besides presenting many other processing problems. It is therefore requested that full co-operation of Master and officers be given to ensure that all ballast tanks and lines are stripped as dry as possible.

MOORING: Vessels are to be moored to satisfaction of Pier Master. A suitable gangway will be provided by shore installation. When it is out of order vessel's gangway has to be used, which will be notified on VHF telephone before arrival at E.M. buoy.

Vessels of any deadweight must secure with at least: *Forward:* 4 headlines; 4 breasting fibre ropes in berths 1 and 2; 1 spring. *Aft:* 2 sternlines; 4 breasting fibre ropes and one spring in berths, 1 and 2. In berths 3, 4 and 5, *Forward:* 2 headlines; 4 breasting lines; 1 spring– *Aft:* 2 sternlines; 4 breasting lines; 1 spring.

When vessel is fitted with tension winches (forward and aft) the following ropes are required:

Forward: 2 headlines; 2 wires from tension winches as breasting lines in berths numbered 1, 2, 5 or 6; 1 spring. *Aft:* 2 sternlines; 2 wires from tension winches as breasting lines in berths numbered 1, 2, 5 or 6; 1 spring.

When vessels are nominated to load at berth 1 or 2 of Jetty 2 one extra headline and a second spring is required. Vessel's best ropes or wires should be used as breasting lines.

LOADING: Vessels should load in accordance with International Loadlines Regulations taking into account maximum permissible draft at this Terminal and also at Maracaibo bar channel.

The Captain of the Port requires that the load-line marks of all vessels using the port be clearly visible. If Harbour Authorities should refuse to pilot an out-going vessel due to being overloaded, Master will be held responsible for all delays and expenses, in connection with discharging any overloaded cargo and all further losses.

Vessels' maximum permitted loading rate should always be required. Maximum shore loading rate is 7,000 M.T. per hour, using 2 shore lines and 4 hoses.

Following ship's whistle signals should be used for loading: 2 blasts=Stand by (15 minutes prior to completion of cargo and or part cargo). 1 blast=Stop (2 minutes prior to complete cargo and or part cargo).

EMERGENCIES: In order to deal quickly and efficiently with any emergency during loading/deballasting operations, the following equipment is available:

(a) Control for quick closing of shore manifold valves. This is a red-painted hydraulic valve situated on the ship/shore gangway. In the event of a spillage aboard, this valve must be opened. Within ninety seconds the shore manifold valves will close against the loading pumps.

(b) Direct ship/shore telephone. This is a red telephone and in order to obtain instant communication with the loading supervisor in the Control Room it is only necessary to lift the receiver. An Alarm Bell will alert the supervisor and a light will advise him from which berth the call originated.

FUEL: Available ex wharf: Bunker "C", thin fuels from 200 to 3,500 seconds Redwood 1 at 100 deg. F., and marine diesel. Delivery rate 400 and 80 tons respectively. Gas oil, F. oil and thin fuels may be supplied by barge ex Maracaibo delivered at anchor, at a max. rate of 110 and 140 tons.

FRESH WATER: Available on all jetties with a loading rate between 20 and 30 t.p.h. This depends on number of vessels at the same time.

MEDICAL: Ship's personnel may visit local doctor on week-days between 0700 and 1130 hrs., or 1400 and 1700 hrs. Outside these hours, or in cases which require special treatment, patients receive attention in Maracaibo. Written request for medical attendance, as well as a shore pass, is always required.

CUSTOMS: 1 opened packet of cigarettes allowed to be taken from vessel by each crew member when going ashore. Masters advised to strongly caution crew against attempted smuggling.

SHORE LEAVE: Not granted until shore passes are stamped and signed by Authorities. Passes must be shown to guards at gangway and gates. Crew members must be properly dressed (long trousers and shirt) before proceeding ashore. Master must collect all passes and return them to Agent before vessel's departure.

GENERAL: *(a) Tides:* In view of the available depth in the channels which allow navigation to vessels up to about 70,000 d.w.t. fully laden at high water, permanent predictions of sailing draft tables have been prepared by Maraven S.A., and they will send these on board ships of over 47,000 d.w.t.

(b) Currents: The tidal current (Lunar tide) at this port can at times be very strong and subject to changes. Usually outgoing tide runs for 7 to 8 hours against 4 to 5 hours for incoming tide. Direction approx. at right angles to jetty.

(c) Movement of Passengers: Embarkation or disembarkation of passengers through this port is not allowed by Venezuelan law, as this Terminal is only authorised by the Treasury Ministry (Ministerio de Hacienda) exclusively for exporting crude oil.

(d) Short Dispatch Procedure: This procedure is available for ships loading cargoes consigned to Shell Companies.

(e) Failure to rejoin vessel: If any member of crew is not aboard at sailing time, Authorities will not clear vessel although permission may be given to proceed to anchorage if the berth is required. If sailing permission is granted, Master is required to sign letter accepting all costs in connection with missing crew member to be for Owner's account.

(f) Launch Service: A charge will be made for a round trip to Maracaibo, but launches are only available on written request by Master. Masters who have to go on business to Maracaibo (Agency or Consulates) can make use of public service launches.

(g) Proceeding to Cardon: Vessels proceeding to Cardon to load or to take bunkers, are required to have ready on arrival at Cardon:

4 Lists of Deck and Engine Stores and Spares.
4 Lists of Stewards Stores.
6 Lists of Personal Effects.
6 Crew Lists.

In order to prevent delays it is imperative that these documents are presented to the port officials when they board to clear the vessel.

(h) Loading for Curacao: Unless Master requests otherwise, arrangements will be made for Goverment Pilot to board ship 1 hour after vessel has signalled "Stand-by".

(i) Guards: Custom Guards (Guardia Nacional) will be posted on all vessels and Masters are reminded that these guards must be accommodated and treated in the same manner as ships' officers. Non-compliance entails not only a fine but will result in delays in clearance and cargo operations.

(j) Visitors: Only persons on business allowed on piers. Visitors, as guest of Master, allowed board vessels provided a written and signed request presented by Master to Port Services Department. Further particulars covering procedure for obtaining permits for visitors can be obtained from Port Services Office.

(k) Cables and mail: Crew mail list forms put on board all vessels when entering Puerto Miranda. Crew's private mail accepted for posting provided all letters bear the sender's name and a list in duplicate is prepared showing addresses and sender. 1 copy of list will be forwarded to Master showing individual charges. Cables can be dispatched at all times.

(l) Norwegian Government Seamen Service: A field representative of the above service is stationed at Puerto Miranda providing Norwegian and Swedish film exchange and other usual services.

(m) Charts – Nautical publications: On arrival of each tanker the Agency Representative will furnish a set of lake charts if required. No supplies of U.S. Hydrographic or British Admiralty charts or Sailing Directions, Nautical Almanac, etc., are available at this port.

(n) American Crew List: Vessels sailing for U.S. ports requested have American Crew List ready on arrival, so it can be forwarded to U.S. Consulate without delay.

(o) Films Exchange: Films may be exchanged at this Terminal.

(p) Fire Alarm: Each Friday morning at 1000 hrs. there will be a test of fire alarms including sirens at the wharves. Before the test will be a warning message in English and Spanish.

(q) Cash Advances: Local currency is Venezuelan Bolivar and cash advances are made only in this currency. It is requested that any requirement for cash advances be included in vessel's ETA radio, to permit delivery on board on arrival.

REGULATIONS: Following regulations should be strictly observed by Master of vessels alongside jetties. Non-compliance with these instructions entails not only a fine but delays in cargo operations.

Use of rafts for painting the ship's sides is strictly prohibited.

Lifeboats should not be lowered without the special permission of the Government Port Captaincy (obtainable on request).

Swimming in the harbour is strictly prohibited.

Waste water, sanitary or other must not be discharged on jetty.

It is strictly prohibited to paint ship's name or others on jetties. When this occurs the vessel will be charged for the cleaning.

Painting in ships alongside is strictly prohibited.

Before commencing loading, all dock scuppers should be securely plugged.

It is necessary to keep a close and constant watch on moorings and to adjust when necessary. When adjusting, call for assistance of harbour tugs before slackening off any mooring lines.

TELEPHONES:

Head Port Services Operations Office 228 during day.
Head PRDP Operations Office 222/310/323 during day.
Operation Supervisor (PRDP) Office 353/343/350 during day and night.
Berthing Master Office 238 during day and night.
Ship's Services Office 338/275 during day and night.
Dispatch Clerk Office 274 during day and night.
Wharf Supervisor (SP-2) Office 244 during day and night.

	Berth	Tankers	Wharf Master
Jetty No. 2	1	213	214
	2	223	224
	3	233	234
	4	243	244
Jetty No. 3	5	253	254
	6	263	264
	Jetties Gate 374		National Guard 276
	Main Gate 364		Customs Officer 268
	Policlinic 348		Port Captaincy 271

AUTHORITY: Maraven, S.A. Port Services Department, Estado Zulia – Venezuela.

Section F

PUNTA DE PALMAS: 10.24 N. 71.34 W.

(See Plan Book)

(N.B. For important details of Documentation, Pilotage etc., see "Maricaibo Lake").

OPERATORS: C.V.P./Llanoven.

FLAG: The authorities require the Venezuelan flag to be flown from the mast head from the time the vessel enters the outer channel to come into the port until it leaves again by the same channel.

LOCATION: The terminal is located at Punta de Palmas del Sur, approximately 13 miles South of the port of Maracaibo on the West shore of Lake Maracaibo. The terminal proper may be identified by a 300 ft. radio tower, having 2 small red lights 200 ft. from the base, and 1 large red light on top of tower. The top light flashes every 2 seconds.

PILOTAGE: Vessels which arrive have the option of taking on the Official Pilot at the following places:

(a) In the outer channel of the Lake of Maracaibo, between buoys B-24 and B-26.

(b) In the anchorage area, located approximately 5.5 miles to the N.E. of the Island of San Carlos and to the East of the buoy B-17. This area is identified by a green light buoy, equipped with a radar reflector (geographical position: Lat. 11° 04′ 22″ N., Long. 71° 33′ 48″ W.).

(c) On the "EM" buoy (i.e. Entrance to Maracaibo), there is also a radar reflector (geographical position: Lat. 11° 13′ 47″ N., Long. 71° 33′ 31″ W.).

The Official Pilot who comes on board at San Carlos will take the vessel to Maracaibo. At times, due to bad weather, the Maracaibo Port Captaincy cannot guarantee the embarkation or disembarkation of Pilots at the "EM" buoy or in the anchorage at Lat. 11° 04′ 22″ N., Long. 71° 33′ 48″ W. For this reason, Masters must contact the Pilots station at San Carlos so that they may give him appropriate instructions as to the place of boarding or disembarkation of the Official Pilot, who, generally speaking embarks between buoys B-24 and B-26.

The system of communications which vessels use with the Pilots station of San Carlos will be the morse lamp, radio-telephone or radio.

The frequencies on which San Carlos listens out are: Radio 2182 kc/s. Radio-telephone 156.6 mc/s. It also operates with frequencies 2080, 2120, 2638, 2738 kc/s R/T and 156.8 mc/s VHF.

Vessels sailing from Punta de Palmas will take on the Official Pilot at the mooring where they are located after having terminated their loading operations. This Pilot must be requested an hour and forty-five minutes before the estimated time of being ready to sail. Vessels which embark their Official Pilot at Punta de Palmas to sail to Maracaibo will change their Pilot again on arriving at that port. The Pilot who embarks will guide the vessel to the proximities of the Island of San Carlos, between the towers E-31 and E-33, where he will disembark onto a Pilot launch. The port Captaincy of Maracaibo has given instructions to shipping Agents for the purpose of informing Masters and Owners of vessels that every Captain must identify himself in advance to the Pilot station at San Carlos at any time of the day, when they are arriving at buoys B-17 and B-19, and when they are sailing at T-42 and T-40. These instructions are of an obligatory nature in order to keep the Pilots' service informed at all times of any emergency that may arise. Also to avoid an Official Pilot going out unnecessarily from his base, especially during the night in the belief that the vessel which is in sight requires his services; in this case both the service of the launch and that of the Pilotage not given will be charged to the ship's Agent or Representative.

Lake Pilotage: An Official Government Pilot will assist every ship in crossing from Maracaibo to Punta de Palmas and in its exit voyage from Punta de Palmas to Maracaibo. This Pilot will also assist in the operations of mooring and unmooring. The Agent will inform the Captain and the Official Pilot of the time determined for berthing the vessel when it arrives at Maracaibo. Vessels which load in Punta de Palmas must request a Pilot for their exit journey at least 1 hour 45 minutes in advance of the time at which they consider the vessel will sail.

CARGO DOCUMENTS: Vessel's clearance and cargo papers will be delivered to the Master on arrival in Maracaibo Harbour outbound. C.V.P./Llanoven will accept no responsibility for delay in clearing a vessel due to unavailability of personnel from offices of the Port Authorities.

APPROACHES: The buoy which indicates the entrance to the outer channel ("EM" buoy) is located in the geographical position: Lat. 11° 13′ 47″ N., Long. 71° 33′ 31″ W. The light of the "EM" buoy has the following characteristics: white light, with 1 flash every 10 seconds, visibility approximately 5 miles. The distance between the "EM" buoy and the inner extremity (South) of the inner channel, marked with buoys B-27 and B-28 is approximately 15.75 miles. The outer channel has a width of 300 m. between the limit on both sides. The navigable portion for loaded vessels is 240 m. wide. The average depth which has been checked at low tide is 13.72 m. (45 ft.) and the tidal amplitude is up to a maximum of 1.49 m. (4.9 ft.). There is a breakwater located a half a mile to the East and parallel to the external channel which extends for 2,574 m. (1.6 miles) to the North from the Northern coast of the Island of Zapara. In its outer extremity there is installed the lighthouse of the steel lattice type construction, with a height of 7.62 m. (25 ft.). The characteristics of its light are: white, with 1 flash every 8 seconds, visibility approximately 5,556 m. (3 miles).

The commencement of the internal dredged channel is marked by buoys B-29 and B-30. The extension of this channel is 19.31 kms. approximately (12 miles) and ends at towers T-55 and T-56. The channel is 244 m. wide (800 ft.) and its normal checked depth is 13.72 m. (45 ft.) at average low tide, with a tidal amplitude which varies between 0.49 and 0.89 m. (1.5 and 3 ft.), at tower T-66, and from 0.82 to 1.46 m. (4.5 ft.) at buoy B-29.

The channel from tower T-56 as far as the Port of Maracaibo is dredged and its termination is marked by buoys B-73 and B-74. It is 244 m. wide (800 ft.) and has a depth of 13.72 m. (45 ft.). Its distance is 17 kms. (11miles).

The depth in all the channels may vary in accordance with the sedimentation to which they are subjected and the formation of sandbanks. The Port Captaincy at Maracaibo issues notices to navigators keeping them informed as to changes in depths in the channels. Navigators are advised to keep themselves up-to-date with these notices of variations of depth when they calculate their exit draft of their respective vessels.

MAX. SIZE:

Berth	*Max. LOA*	*Max. Draft*	*Max. d.w.t.*
No. 1	835 ft.	38 ft.	80,000 tons
No. 2	835 ft.	37 ft. 6 in.	80,000 tons
No. 3	890 ft.	42 ft.	100,000 tons

Also see "Berthing"

RADIO: *Time of Arrival (ETA):* When a vessel leaves its previous port destined for the Terminal of Punta de Palmas, it must inform both its Agent and C.V.P./Llanoven in Maracaibo as to its best estimate of the date and time of arrival in Maracaibo. Then at least 24 hours prior to arrival at the San Carlos Pilots' station, it must send another message to confirm the time of arrival at Maracaibo. The nationality of the vessel, name, nett Venezuelan tonnage (if it does not have this, its registered tonnage), last port, name of Master, permanent ballast or cargo in tanks or both, and any other information which is pertinent must be included in this message. The cable address of C.V.P./Llanoven is as follows: C.V.P./Llanoven, Maracaibo, Telex 61126. By virtue of the circumstances that the Cable Office in Maracaibo is not equipped to communicate with vessels on the high seas directly, messages sent to C.V.P./Llanoven and to the Agent of the vessel must be transmitted through "PJC" (Curacao), with the prefix "Via ACC" (All American Cables and Radio, Inc.).

We wish to emphasize that by virtue of the fact that our undertaking rents a part of its equipment which it uses for mooring vessels in accordance with the last message of arrival of the vessel, this message must be compiled with the greatest accuracy possible. Any alteration in the time and date of arrival affecting the vessel before or after the time indicated in its message, will be for the account of the vessel as will be the cost of rental of the equipment used.

C.V.P./Llanoven is in no way obligated to carry out the mooring of any vessel, except at the estimated time of its arrival at Punta de Palmas, although exception is made where the vessel may have been delayed in Maracaibo by virture of reasons beyond the control of the Master.

The C.V.P./Llanoven Export Department is equipped with radio-telephone and radio on the following frequencies: (2182 listening out) 2080, 2120, 2638, 2738 kc/s. R/T and (156.6 listening out), 156.8 mc/s. VHF. These are operated at the following times: Mondays to Fridays: From 0730 until 1130 and from 1300 to 1700 hrs. Saturdays, Sundays and Holidays: From 0800 until 1000 hrs. approximately.

TUGS: Tug service consisting of 2 tugs of not less than 1,600 h.p. each is provided by the terminal operator for all vessels. Both tugs will assist all vessels in mooring and unmooring operations. Should it be deemed necessary by the terminal operator to require a tug in addition to the 2 terminal tugs for mooring or unmooring vessels exceeding 750 ft. in length, charges for this additional service will be for the account of vessel.

Vessels which exceed 835 ft. overall length, and destined for Berth No. 3, require the assistance of at least an additional tug. This additional tug will remain at the convenience of the Terminal for the time that the vessel remains at the berth.

In all cases where there are adverse weather conditions, without taking into account the size of the vessel, the Operator of the Terminal, at his convenience, may request the services of an additional tug to protect the installations of the Terminal and the ship, which will be for the account of the vessel.

The Terminal Department will make the necessary arrangements through the intermediary of the ship's Agent, for contracting additional tugs. These services will be charged to the ship's Agent by the tug operator who is contracted.

MOORING: *Berth No. 1:* Located approximately 8.85 kms. (5.5 miles) from the Terminal and 2 kms. (1.25 miles) to the West of buoys D-95 and D-96 in the Maracaibo Channel. Distance between the bow and stern buoys is 364.90 m. (1,200 ft.).

This berth is equipped, apart from the mooring buoys, with a transversal mooring pile on its Eastern side, submerged, with chain and cable the same as those of the buoys. This does not interfere with the operations of mooring and unmooring.

Berth No. 2: Located approximately 8.85 kms. (5.5 miles) from the Terminal and 2 kms. (1.25 miles) to the East of the buoys D-95 and D-96 and to the N.E. of berth No. 1. Distance between the bow and stern buoys is 350.50 m. (1,150 ft.).

This berth is equipped, apart from the mooring buoys with a transversal submerged mooring pile equal to that of berth No. 1.

Berth No. 3: Located approximately 9.65 kms. (6 miles) from the Terminal, 1.2 kms. (0.75 mile) to the West of the buoys D-95 and D-96 and approximately 914 m. (3,000 ft.) to the East of berth No. 2. Distance between the bow and stern buoys is 365.76 m. (1,200 ft.).

This berth is equipped similarly to berths Nos. 1 & 2 with a transversal submerged pile on the Western side of the berth.

Conditions applicable to all berths: (a) Vessels which have a total overall length of 239.26 m. (785 ft.) or more must be equipped with 2 tension capstans at the bow and on the after deck, with sufficient cable to reach the stern and bow buoys respectively.

(b) Every vessel loading at any of the berths must take into consideration that due to Government regulations, the vessel must have a minimum clearance of 0.984 m. (3 ft.) below the keel at any point during its transit through the Maracaibo Channel, without taking into account the limitations of the channel assigned to the 3 berths by the Terminal Operator. In view of this regulation and the constant variations of the depths of the channel, Masters must be guided by the most recent "Depth Bulletins" which are issued by the National Channel Institute, and by the tide tables when they are planning their transit time through the channel, and the maximum draft to which they may load their vessel.

Mooring procedures and rules applicable to mooring points: Every vessel carrying out mooring operations at any of the 3 berths must arrive with a minimum draft of 3.65 m. (12 ft.) forward and respect the following procedure and rules for berthing:

(a) Anchor: Vessels approaching the berths from the East, in the most convenient manner and safely as possible they must drop their starboard anchor in its location once the vessel has been berthed, the chain facing East, with a length of not less than 137.16 m. (450 ft.).

(b) Mooring cables: One of the following alternatives for mooring cables at each side of the vessel must be fulfilled:

1. Two cables of synthetic fibre (Nylon or Polypropylene) with 9 in. circumference and 1 steel cable which has a minimum diameter of 1.25 in.
2. One cable of synthetic fibre (Nylon or Polypropylene) with 9 in. circumference and 2 steel cables also supplied by the vessel and which have a minimum diameter of 1.25 in.
3. One cable of synthetic fibre with a 9 in. circumference and a safety cable of 1.5 in. diameter which will be supplied by the Terminal.

(c) Countertension cables: A countertension cable will be attached to the stern or fore deck. Vessels which have a length exceeding 800 ft. must use countertension cables on both sides of the deck simultaneously.

(d) Transversal cable: The transversal cable which will be supplied by the Terminal will be attached to the after deck on the starboard side. Vessels mooring at berth No. 3 must also attach an additional transversal cable to the after deck on the port side.

(e) All cables which are attached to vessels must have 6 turns around the bitts, and these must be secured so as to prevent them from unwinding.

(f) The pressure capstans must be secured in the braked position, once all other cables for mooring the vessel have been secured. These mooring cables must be maintained tight as the vessel goes down in the water whilst it is being loaded.

(g) Vessels must be supplied with sufficient cables as spares which can be used as the Terminal may require. All cables must be maintained in good condition and are subject to acceptance by the representative of the Terminal. Vessels must maintain sufficient personnel on deck during the whole time that the vessel is at the berth to attend to the cables for mooring purposes whenever this may be required by the Terminal.

It is understood by both parties that, when the Terminal may require safety cables to be used, and where such are required, C.V.P./Llanoven accepts no responsibility for damages or losses occasioned to any vessel, installation or person due to the use or failure of this equipment.

The vessel's gangway must be in position so that the mooring supervisor or other personnel from the Terminal can come on board the vessel when it arrives at Punta de Palmas.

This gangway must be suspended whilst manoeuvres are being carried out, this for the purpose of obviating any damage to it occasioned by tugs or launches.

Berthing Supervisor: The Berthing Supervisor of C.V.P./Llanoven will come on board every vessel prior to its entrance to the berth to establish radio contact between the vessel, the Marine equipment and the Office at the Terminal.

Mooring gangs and equipment: The mooring equipment will be handled by the launches employed in the manoeuvres. The tug service will be available 24 hours of the day through the intermediary of the Terminal Port.

The mooring gangs will assist the vessel personnel in the operations of hoisting, connecting and disconnecting the two 12 in. diameter loading hoses. The approximate weight of the loading hoses is 4 tons.

The launches used for the manoeuvres will place on board equipment to facilitate the work of connecting the hoses. This equipment will be at the disposal of the vessel's personnel when required as are also the launches to transport personnel.

Responsibility: The Master may request any equipment or service which he may consider necessary for a safe and efficient operation of his vessel and the Terminal Operator will do everything within his power to fulfil this requirement. Therefore all owners and operators of vessels arriving at Punta de Palmas will accept the responsibility of the safety inherent in the manoeuvring of their vessels and their movements to and from the Terminal. C.V.P./Llanoven will accept no responsibility for losses or damages occasioned to the ship, its installations and others unless such loss and damage be occasioned due to the faults in the installations belonging to the Terminal or operated by the Terminal with the exception of the security equipment.

Operational checklist: At the time when the vessel is moored and the hoses are connected, prior to the commencement of the operations of loading, the representative of C.V.P./Llanoven on board will deliver to the Master an operational checklist. The Master is required or whomsoever he may appoint to carry out this work together with Terminal representative, to check very carefully that all the safety regulations have been fulfilled.

Berthing Supervisor: The Berthing Supervisor will have charts and plans which will be at the disposal of the Master and his advice if he should require it. The representative will also be available to inspect the vessel's tanks and to act as liaison between the Master of the vessel and the Agent or with the Terminal of Punta de Palmas, to transmit any information relative to the ship. This supervisor must receive lodging and treatment at the same level as the ship's officers.

Unmooring procedure: When the loading operations are completed, the launches will proceed to remove all mooring cables from the buoys under the supervision of the official entrusted with the vessel or the Official Pilot, assisted by the Berthing Supervisor of C.V.P./Llanoven.

Documentation: The departure and loading documents will be delivered to the Master by his Agent or his representative, when he passes through the Port of Maracaibo.

BALLAST: *Deballasting:* It is understood that it is not permitted to discharge ballast in the lake, even though this may come from tanks used solely for ballast. Ballast will be discharged with the pumps of the vessel to the deballasting system which exists at the Terminal. As soon as the loading hoses are connected, the personnel of the Terminal will align the system with its respective valves. Once these operations are completed the Berthing Supervisor on board will inform the Captain that he may commence deballasting and in turn will keep him informed as to the pressures which will be used in the operation. Once the deballasting operation has been completed, the personnel of the Terminal will align the system again and its valves so that the vessel can receive cargo through the same hoses which are used for unloading ballast and simultaneously the personnel of the vessel will align their systems on board to receive cargo. The personnel of the vessel responsible for receiving the cargo will inform the Representative of C.V.P./Llanoven (Berthing Supervisor) when the vessel is in a condition to receive and he in turn will inform the personnel of the Terminal that they may commence pumping.

LOADING: *Oil leakage:* In order to obviate contamination of Maracaibo Lake and possible legal actions, we recommend strongly that Masters of vessels emphasize to their deck officers in order to obviate leakage that they make sure that all necessary measures have been taken on board to this end prior to commencing the loading operations. The purpose of this is to maintain on deck any leak or wastage which may occur in the vessel.

Guarantee of responsibility: In the event of an oil leakage or any other contamination or any other damages to installations caused by a vessel, the operator of the Terminal, prior to the vessel sailing, will require the Agent to deposit bond in favour of C.V.P./Llanoven to cover the fine or other charges which may be incurred in collecting, cleaning, repairing the installations of the Terminal and also to cover any claims from third parties.

Loading procedure and pumping rates: The position of the loading hoses, supports and connections must be to the satisfaction of the personnel on board. The valves of the hoses for loading purposes will be opened in order to test the connections, detect leaks and then ultimately to commence operations.

The responsibility and custody of the cargo passes to the personnel of the ship from the moment when the cargo arrives at the connection which is the property of the ship.

The minimum loading rate at berths Nos. 1 and 2 is 4,000 b.p.h. The average pumping rate, under normal conditions is 13,000 b.p.h. Sudden stoppages in loading will not be permitted during loading except in cases of emergency.

Personnel on board, responsible for the loading operations, must notify the Terminal representative, not less than 10 minutes in advance of the completion of loading. This will enable the representative to instruct the operator to reduce the rate of pumping or to continue loading by gravity as he sees fit.

For reasons of security, loading may be suspended and the hoses disconnected from the vessel's manifold when weather conditions are not favourable or at any time that the Terminal considers it convenient to do so due to force majeure or other reasons.

Displacement of the line: Sometimes it will be necessary to displace the submarine line in combination with the loading operation. To carry out this operation it is required that the personnel responsible for receiving the cargo notify sufficiently in advance the Berthing Supervisor when the amount of cargo lacking is equal to the capacity of the line.

The capacity of the line is a fixed quantity. Therefore it must not be considered with shortcomings or excesses.

Therefore when it is necessary to effect a displacement, the loading must be calculated carefully by the vessel personnel responsible for this operation.

It is understood that any error or negligence on the part of the vessel personnel in calculating the initiation point of the displacement of the line, will require a land pump to correct the displacement. Due to the submerged manifold it will be necessary to employ a diver to operate the valves and this operation may result in a fairly costly procedure and involve a lot of time. All costs involved in fulfilling this operation, together with the time lost will be for the account of the vessel.

Increase in pumping rates: At the request of the Master and subject to the approval of C.V.P./Llanoven, it is possible to suppy a pumping rate of 17,000 b.p.h. up to a maximum of 30,000 b.p.h., provided the operations of the Terminal permit this to be done.

MEDICAL: *Maracaibo:* Complete services are available.

Punta de Palmas: Emergency cases only will be transferred to Maracaibo for treatment, at the request of the official in charge of the vessel.

FUEL: Heavy and medium marine diesel, intermediate fuel, and bunker "C" fuel oil available. Lubricating oils also available. Pumping will be affected during daylight hours and with prior permission of the Terminal.

FRESH WATER: Available from local contractors with barges. Pumping will be affected during daylight hours and with prior permission of the Terminal.

STORES: Fresh and dry provisions procurable through ship chandlers in Maracaibo for delivery at the Terminal.

REPAIRS: *Maracaibo:* There are no facilities available for carrying out major repairs. Nevertheless, repair work may be carried out through local workshops and labour can be supplied if this is required. Technicians in radio, radar, gyro compass repairs are also available.

Punta de Palmas: No type of repair will be effected here, which may prevent the unmooring of the vessel without the authority of the Marine Supervisor. Neither may boiler tubes be "blown" whilst the vessel is moored.

SHORE LEAVE: Launch service for business purposes and emergencies is readily available. Launch service for shore leave can be arranged through contract marine service and will be responsibility of ship's personnel. Arrangements for shore leave transportation can be made through Loading Master on board.

CUSTOMS: All vessels entering from foreign ports and bound for Punta de Palmas Terminal are required to anchor in Maracaibo Harbour for formal customs clearance and visit of government port authorities prior to proceeding to destination.

The vessel's accommodation ladder should be rigged prior to the vessel's arrival at Maracaibo. A member of the National Guard will board each vessel at Punta de Palmas to observe all activities connected with loading or unloading operations. This official is authorised as the customs representative, and is referred to as Customs Watch. Food and accommodation similar to officers should be made available to him by vessel.

CONSULS: See "Maracaibo".

GENERAL:

Transportation: Transportation will be supplied by launch between vessel and Punta de Palmas to the following persons, without exception:

1. Master of the vessel of the Chief Engineer, to attend to matters relating to the ship.
2. Sick personnel who require emergency medical attention.
3. Official Pilot.
4. Members of the National Guard and other Government Officials whose services relate to the tanker.
5. Doctors, when these may be required by Master, in the event of emergency only.
6. Inspectors of the oil industry.

Consular representatives, ship's suppliers, engineers, naval experts, representatives of the oil companies, suppliers of fuel and water and any other person who requires to come on board tankers when they are in Punta de Palmas must make their own arrangements for transportation to and from the ship through the intermediary of the ship's Agent. Also Agents must make their own arrangements for their own transportation.

Personnel of the ship with licence to disembark: The transportation of personnel with licence, when this is required by the Master, must be arranged through the intermediary of the Agent. Also passengers must embark and disembark at the Port of Maracaibo.

Personnel with licence are not permitted to go ashore at the Terminal of Punta de Palmas.

Classification Societies: American Bureau of Shipping, Lloyd's Register of Shipping, Salvage Association of London, Det Norske Veritas, Bureau Veritas, Registro Italiano Navale and Germanischer Lloyd have Agents in Maracaibo or in Caracas. There are experts available through the intermediary of the Agents mentioned above.

Monetary System: The monetary system of Venezuela is the Bolivar (Bs.), and is the only money legally recognised in the country. A Master who requires a cash advance must request same from his Agent when he notifies his ETA. Payment of all invoices for Terminal charges must be made in Bolivares at the Office of C.V.P./Llanoven in Maracaibo, unless other instructions are given.

Mail: Mail for the vessel can be delivered to the representative of the Agent who comes on board the vessel at the time of its arrival or sailing from Maracaibo.

AUTHORITY: C.V.P./Llanoven.

AGENT: Head Office. (Management and Control), Brokers, chartering and tramp Agents, Victor H. Selinger S.A., PO Box 1632, Caracas 101. Venezuela. Cables: "Selvic" or "Seltank". Tel. (02) 81.02.71. Telex: 22859, 21402, 21934 or 21631. New Boe Code.

Local Office: PO Box 496, Maracaibo. Tel. (061) 224960, (061) 224962. Cables: "Seltank Maracaibo" or "Selvic Maracaibo". Telex: 62166.

Section G

SAN LORENZO: 09.47 N. 71.05 W.

OPERATORS: Maraven, S.A.

LOCATION: S.E. side of Lake Maracaibo.

APPROACHES: Vessels have to arrive at Maracaibo Roads through a dredged channel with controlling depths of 45 ft. in outer bar, inner channel and Punta Palmas area. In vicinity of terminal the controlling depth is 36 ft.

PILOTAGE: It is compulsory from San Carlos to Maracaibo. Pilot normally boards vessel at buoy B–26 (Posn. 11° 01′ N. 71° 35′ W.). It is also compulsory for all vessels which have to load at any terminal located South of the bridge Rafael General Urdaneta. This bridge has a horizontal clearance of 656 ft. and a vertical one of 148 ft. at 45 ft. MMOLW level. Pilots have to embark and disembark at Maracaibo.

When Masters have no Pilot exemption Certificate for crossing outer bar, permission has to be requested by VHF or 2182 kc/s. prior arrival, which is being granted on request.

ANCHORAGES: Masters may use the following:

(a) Near E.M. Buoy, (not recommended because of the distance from San Carlos. The pilot launch never reaches this point).

(b) At Maracaibo Roads.

(c) At terminal approaches, in accordance with depths available in the area, and ship's draft.

LIGHTENING POSITION: In the Southern lake Area, arrangements have to be made in advance. Also at Maracaibo.

HEALTH: Quarantine officials board vessels at Maracaibo Roads. Pratique cannot be granted by radio.

RADIO: San Carlos Pilot Station has VHF Channels 12 & 16. Emergency call 2182 kc/s. Terminal has VHF Channel 12.

TUGS: Compulsory. When vessel is over 25,000 d.w.t. a second tug is required, which is available in the area, 1,200 h.p. each. There is also a launch to assist the vessel during manoeuvring.

BERTHING: Continuous wharf 2,340 ft. in length with dolphins. This terminal is only for handling crude and its products. Maximum berthing displacement: 20,000 tons.

	Berth No. 1	*Berth No. 2*	*Berth No. 4*
Max. LOA	560 ft. 00 in.	665 ft. 00 in.	
Max. Depth	24 ft. 06 in.	35 ft. 06 in.	Out of
Max. Draft	23 ft. 06 in.	34 ft. 06 in.	Service
Loading Rate	1,450 t.p.h.	2,000 t.p.h.	

These depths are referred to the minimum monthly observed lowest water level (MMOLW).

FRESH WATER: Available ex-barge at Maracaibo Roads.

DENSITY: At berths 0998 and at outer bar between 1020 and 1025.

FUEL: Any grade. In case vessels require grade not available at berth it may be supplied ex-barge at Maracaibo, which has mixing equipment able to supply the grade involved. Rate 20–140 t.p.h.

MOORING-UNMOORING: Carried out by Official Pilots. Mooring is Head-out to facilitate departure.

DEBALLASTING: Installations have ballast pit with capacity 650 cu. m. Max. discharge rate 600 t.p.h.

TANK CLEANING FACILITIES: Carried out by outside contractor.

REPAIRS: Minor ones only, including electronics.

INSERT LA CEIBA

MORON: 10.32 N. 68.11 W.

LOCATION: CVP's shipping and refining facilities are situated on the central coast of Venezuela in an area which is known as Golfo Triste, 11 miles West of Puerto Cabello.

The Terminal is an "S.B.M. System" located in position:
Latitude: 10° 31′ 50″ North
Longitude: 68° 10′ 50″ West.

(2 miles N.W. of Punta Moron and 5 miles S.E. of Yaracuy river mouth).

The Refinery and main storage tanks are located 1 mile South of the buoy on the nearby mainland.

DOCUMENTS: *Venezuelan Tonnage Certificate:* All ships arriving in Venezuelan ports for the first time must be measured by the Maritime Authorities for issuance of a Venezuelan Tonnage Certificate, known as "Certificado de Arqueo". This document gives the measurements and weight of the vessel in accordance with existing laws. The cost of measuring and issuing of the Certificate is contingent on the size and tonnage of the vessel.

It is the usual practice to take ashore the ship's "General Arrangement" and "Capacity" plans which are used as a basis for calculations. These plans and the Venezuelan Tonnage Certificate are later forwarded to the ship's Owners.

Vessels registered in the following countries are exempt from the above regulations, due to existing reciprocal agreement with Venezuela: U.S.A., Great Britain, Denmark, Ireland, France, Germany, Netherlands, Sweden, Norway, Portugal.

Above regulations, due to existing reciprocal agreement with Venezuela: Government Port Charges, such as Port Captain Habilitation for entry and despatch of vessels and Pilotage Dues, for all vessels except those registered in the countries mentioned above, in which case the Lloyd's Registered Tonnage is used.

Inward Clearance: Inward Clearance is effected on board by Government, Port and Customs Officials, CVP's Marine Office Representative and the Dispatcher or Expediter or a representative of the Agency, immediately after mooring.

The following documents must be ready on arrival:

(A) *In Ballast:*

1. Clearance from last port
2. Ballast manifest from last port (1 copy visaed according to paragraph (e) if there is no Venezuelan Consul)
3. Crew list (10 copies)
4. Steward's store list (all foodstuff, liquors, tobacco, etc.) to be declared on a separate and independent sheet (6 copies) (see paragraph D)
5. Deck and engine stores and spare parts list (paint, varnishes, chains, ropes, etc.) to be declared on a separate and independent sheet (6 copies) (see paragraph D)
6. Medicine chest list (including narcotics accurately itemised) (6 copies)
7. Slop chest list (6 copies)
8. Personal effects list (6 copies)
9. List of passengers in transit (if any) (6 copies)
10. Sailing permit (issued by Maritime Authority of last port of call)
11. Passenger and baggage list (if any) (6 copies visaed; 3 copies not visaed).

(B) *With Cargo to Discharge:*

In addition to the documents stated in paragraph (A), following will also be required:

1. Consular Mail (one sealed envelope from each loading port)
2. Manifest (Sobordo) (1 original visaed and 3 copies not visaed from each loading port)
3. Bills of Lading (1 original and 2 copies visaed, and 4 copies not visaed from each loading port)
4. Tally books (6 from each loading port)
5. Consular Invoice (3 originals visaed and 3 copies not visaed, from each loading port)
6. Commercial Invoices (3 from each loading port)

(C) *With Cargo in Transit:*

In addition to documents required in cases (A) or (B), a copy of the Bill or Bills of Lading covering all in-transit cargo is required.

(D) Store list prepared should indicate separately all deck, engine and cabin stores. The store lists may be prepared on board prior to arrival unless the vessel is coming from the Netherlands Antilles or the Guianas, in which case they must be visaed by the Venezuelan Consul at the port of departure.

(E) Cargo and clearance documents should be visaed by the Venezuelan Consul at the last port of call. In the absence of a Venezuelan Consul, they may be visaed by the Consul of a friendly nation, by the Chamber of Commerce or by two reputable merchants whose signatures shall be notarized. In the absence of a Venezuelan Consul, the following notation should be written in Spanish on each document signed by the alternates' designates above:

"Por no existir en la localidad Agente Consular Venezolano y a peticion de los embarcadores, certifico el presente documento".

(Signature)

Outward Clearance:

On completion of loading, vessels will be unmoored immediately and proceed to the corresponding anchorage area for the completion of port formalities and cargo documents. These formalities usually take from 2.5 to 3 hours to complete from the time that the ship has been unmoored.

In order to obtain the sailing permit, a special form which is delivered on board on arrival, must be completed one hour before unmooring. This form gives cargo and freeboard information required by the Harbour Master to be handed together with the crew's shore passes via the Harbour Master's representative or Customs representative on duty (National Guard).

Outward clearance and cargo documents are delivered to the anchorage by the dispatcher or expediter.

PILOTAGE: On arrival at Moron, vessels should wait for the Government Pilot and for the CVP Marine Office representative.

Vessels must not enter the port limits unless Pilot and CVP Marine Office Representative are on board. The use of Government Pilot is compulsory for all vessels entering or leaving territorial waters, however, all manoeuvres or operations should be under direct supervision of the CVP Marine Representative.

CVP will arrange for this service at all times, and if for any reason, a tanker is required to wait for any time at anchor, the ship will be advised through the pilot boat or via the coastal radio station "YVL".

APPROACHES: The CVP Marine Terminal in Moron is well marked with light beacons, and presents no navigational difficulties in clear weather.

Reference to the chart, will show that the Golfo Triste is easily navigable; but owing to the presence of fishermen, when approaching the coast Masters should keep a particularly sharp lookout for fishing boats, nets and small craft.

Lighthouse on Shore:

Description: A post painted with red and white horizontal bands.

Position: Latitude 10° 31′ 06″ North.
Longitude 68° 11′ 21″ West.

Light: Flashing White, every 3 seconds. Flash 1 second, Eclipse 2 seconds, Flash 1 second. Visibility 10 miles.

Night Arrival: When the ship arrives after 1700 hrs. local time during Winter or after 1800 hrs. local time during Summer, it will have to anchor until daybreak. *No night mooring is allowed.*

Vessels are able to leave at night.

ANCHORAGE: It is forbidden to anchor near the SBM. The SBM is secured in position by 8 chains, each chain 234 m. long; there are also pipe-lines between the buoy and the coast. The recommended anchorage is well shown in the navigational chart, and it is recommended because it is near to the pilot boat pier (Punta Chavez). Vessels should anchor outside the Puerto Cabello pilotage zone.

MAX. SIZE: 55,000 d.w.t. and max. draft 39 ft. Depth of water 42 ft.

TUGS: Not available.

MOORING: All vessels planning to moor at Moron Marine Terminal shall be equipped with not less than 2 wires of sufficient length and strength (not less than 100 ft. long and 5.5 in. circumference).

Each end with thimble. Thimble must accept 2.5 in. shackles.

These two wires are fastened in the forecastle bitts one on each side according to the Marine Office Representative's instructions.

If the vessel is not equipped with 2 wires, CVP will furnish 2 wires 100 ft. long and 5.5 in. circumference.

When the vessel is about 300 ft. from the buoy, the mooring launch will pick up 2 ropes from the vessel and will secure then with 2.5 in. shackles, each one, to a wire of 1 in. diameter and 30 ft. long. These wires are connected in the opposite end, each one, to a specially shaped "triangle" plate.

These "triangles" are connected to a 10 ft. long chain, these chains are intended to rest (one at port and the other one at starboard), on the vessel's fairleads at the bow when mooring is completed.

The chains are attached by means of two nylon ropes 110 ft. long and 12 in. in circumference, to the buoy.

After heaving of ship's ropes and after placing the chain in the fairleads each "triangle" is connected with wires previously fastened to the forecastle bitts by means of a shackle, one on each side. In order to improve the ship's safety it is recommended to reinforce this operation with two or more ropes from vessel, to facilitate the sailing manoeuvre.

No ship in the mooring manoeuvre must be placed less than 300 ft. from the buoy.

Night Mooring:

The mooring manoeuvre is realised during the day, the sailing manoeuvre is carried out at any hour during the night, so the forecastle lighting must be adequate.

When the lighting in the forecastle is not sufficient, it will delay the sailing of the ship until daybreak, and all charges for this delay will be paid by the ship.

Unmooring:

The ship's lines used to reinforce the moorings remain secure until the last moment, in order to disconnect the shackles without risk.

A launch will be ready near the bow to release these lines.

RADIO: *Cable Address:* "Cevepe-Moron".

All Radio Communications from vessels should be via the coastal radio station "YVL" Puerto Cabello, and the first word of the text "Termar".

Arrival messages (ETA):

Loading:

(A) Masters of all vessels destined to load at Moron Marine Terminal are requested to give ETA at least 72 hours in advance of arrival.

The Radio Message should include:

1. First word of the text "Termar"
2. Ship's flag
3. Ship's name
4. Net registered tonnage
5. Port of departure
6. When originally cleared for another port, including any other Venezuelan port, and diverted at sea to Moron Marine Terminal, vessel should include diversion advice, and port to which vessel originally cleared.
7. Number of crew and passengers
8. Quantity of dirty ballast in metric tons
9. Time required to discharge ballast
10. Type and amount of cargo vessel will load
11. Bunker requirements (only bunker "C" fuel oil available)
12. Other requirements
13. Master's name

(B) 24 hours before arrival vessel should Radio advising any change (or no change) of ETA. First word of the text "Termar".

(C) Finally 12 hours before arrival vessel should *Radio* again confirming ETA. First word of the text "Termar".

Discharging:

(A) Masters of all vessels destined for discharging at Moron Marine Terminal are requested to give ETA at least 72 hours in advance of arrival.

The Radio Message should include:

1. First word of the text "Termar"
2. Ship's flag
3. Ship's name
4. Net register tonnage
5. Port of departure
6. When originally cleared for another port, including any other Venezuelan port, and diverted at sea to Moron Marine Terminal, vessel should include diversion advice and port to which vessel was originally cleared.
7. Number of crew and passengers
8. Deepest draft
9. Type and amount of cargo on board
10. API gravity of the cargo
11. Bunker requirement (only bunker "C" fuel oil available).
12. Other requirements
13. Master's name

(B) 24 hours before arrival vessel should Radio advising any change (or no change) of ETA. First word of the text "Termar".

(C) Finally 12 hours before arrival vessel should Radio again confirming ETA. First word of the text "Termar".

Important:

Notice of diversion of ship at sea not received prior to arrival of vessel, subject ship to heavy fines and delays.

When ship comes from neighbouring ports less than 72 hours from Moron Marine Terminal vessel should radio the first message, as soon as possible, in order to avoid delays on arrival. Any expenses incurred or delays resulting from lack of radio information will be for the account of the ship.

Example to confirm ETA:

The t/s "Petrolasa" estimate to arrive on July 15th at 1400.

Cevepe
Moron
Termar Petrolasa Confirm ETA 151400
Master

OR:

Cevepe
Moron
Termar Petrolasa Confirm ETA Wednesday 1400
Master

Marine Band:

Any ship which wishes to establish communication with Moron Marine Terminal on the frequencies of 2080 kc/s., 2120 kc/s, 2182 kc/s, 2638 kc/s and 2738 kc/s. (International Marine Band) it will be able to do so if previously sends a radiogram stating the date and the time, as there is no permanent radio operator.

When there is a ship at the port, the radio operator is permanently on watch on 2182 kc/s. from Monday to Friday between 0700 and 1200 hrs. and between 1300 and 1600 hrs. local time.

It is forbidden to use the radio equipment without the authorization of the CVP Marine Office Representative.

VHF: Any ship wishing to establish communication with the Moron Marine Terminal on the frequency of 156.55 mc/s. (Channel 11) will be able to if prior to arrival a cable is sent stating the date and time, as there is no permanent radio operator.

When there is a ship at the buoy, this Channel is used for cargo operations.

S.B.M.: *Description:* The uppermost part painted white, the hull white and red in vertical bands.

Fitted with radar reflector on top.

Position: Latitude: 10° 31′ 50″ North.
Longitude: 68° 10′ 50″ West.

Light: Flashing white every 9.5 seconds. Flash 2.5 seconds. Eclipse 7 seconds. Height 10 ft. Visibility 5 miles.

HOSES: *Floating Hose:*

Description: A 16 in. diameter black floating hose with red foam plastic floats. This floating hose can move freely 360° around the buoy and is 557 ft. long.

Light: The position of the floating hose is indicated by 2 red buoys with red light flashing every 1 second; Flash, 0.5 seconds; Eclipse 0.5 seconds.

During the manoeuvres while the mooring launch is working with the ship's lines another launch keeps the floating hose clear of the side of the ship. This floating hose is 170 m. long, to be connected to a 12 in. diameter ship's manifold.

Vessels nominated to load/discharge/take bunkers in this port must prepare their manifolds with 12 in. diameter connections.

Hose handling: Shore employees will assist in connecting and disconnecting hose to vessels. A ship's officer must be present and the ship's deck officer on duty must approve the hose connection on board.

Ships must be adequately equipped with derrick, blocks, tackle, wire runners and sundry equipment to efficiently hoist the floating hose from the sea to the loading position. Sundry equipment should include wrenches, drift pins, nuts and bolts, wire and fibre strops, drip pans, gaskets, etc.

To assist in vessel turnaround, tankers should have all necessary booms and cargo gear rigged and ready before ship is boarded by Pilot.

Loading is effected both by night as well as by day and such standards can only be assured by vessels having equipment fully suited to Terminal requirements.

Before mooring, blind flange on the ship's manifold should be removed in order to speed up the connection of floating hose by shore personnel. A maximum pressure of 150 lbs. is allowed on the loading hose.

LOADING: The approximate maximum loading rates of products available is:

Product	*Barrels per Hour*
Fuel Oil	up to 15,000
Bunkers	up to 15,000

Discharging Rate:

As governed by vessel's pumps, but a maximum pressure of 150 lbs. is allowed on the loading hose.

Documents:

The time to elaborate the documents and cargo papers, starting from the hour that the ship has been unmoored is about 3 hours. However, this time is reduced to only 40 minutes if the Master on arriving, signs the documents. This reduces the waiting time, and eliminates the possibility of the papers to the Consignee, Owner, etc., being dropped into the water or being damaged during the two journeys by boat.

BALLAST: A vessel *must have sufficient ballast for safe handling,* having due regard to existing weather and sea conditions. Through a careful watch of the weather and sea conditions, frequent exchange of information between ship and Terminal, and by a knowledge of the behaviour of his own vessel a ship's Master may come to the Terminal with a minimum of ballast.

Clean Ballast can be pumped into the sea, but Masters are reminded that pollution of the sea incurs heavy fines.

Dirty Ballast can be received ashore via 16 in. submarine pipeline to ballast disposal facilities.

Vessels equipped with a separate system of ballast tanks will be allowed to discharge ballast and load oil simultaneously, providing approval is first obtained from the CVP Marine Terminal Supervisor.

It is the ship Master's responsibility to see that no oil of any kind is pumped or spilled overboard from the ship.

The discharge of dirty ballast within the territorial waters of Venezuela is strictly prohibited. As a further measure to avoid pollution from oil within coastal regions, Masters of tankers are requested not to clean tanks and lines and not to pump dirty ballast within 50 miles of the Venezuelan territorial waters.

MEDICAL: No medical or dental services are to be expected at Moron (except in case of emergency and subject to a doctor being available).

FRESH WATER: Not available.

FUEL: Only Bunker "C" Fuel Oil is available. Chief Engineer to witness shore tanks gauges.

TIME: GMT minus 4 hours. No changes.

REPATRIATION: Not allowed.

CONSULS: French, Norwegian, Swedish and Panama Consulates are represented in Puerto Cabello, 12 miles East of Moron.

SHORE LEAVE: Launch for shore leave personnel depends on launch availability on arrival, advance notice should be given in order to arrange for one. The Master should so advise via coastal radio station "YVL" Puerto Cabello in a separate message, to the CVP Marine Office.

It is important that Master bear in mind that this service is supplied by an outside firm on a round trip basis and that the service is between Puerto Cabello and the ship, and between the Master and the contractor.

In Moron Marine Terminal there are no facilities to embark/disembark. CVP does not assume any liability for this outside service including injuries or accidents, even if it occurs inside the port limits. Master of the vessel is solely responsible in all respects, but CVP reserves the right, at anytime and without notice, to withdraw, control, supervise or change regulations of such service according to self interest.

GENERAL: *National Holidays:* By order of the local Port Authorities it is requested that all ships in port be fully dressed on the following National Holidays: January 1st, April 19th, July 5th, July 24th, October 12th, December 25th.

Merchant Marine Holiday: On June 21st the country celebrates the National Merchant Marine Day. It is requested that all ships in port be fully dressed this day.

Launch Service: Launch service for transporting Pilots, Port Authorities and CVP personnel, handling lines to buoy, connecting floating hose, and for other official business is readily available.

These launches are on duty continuously under the direction of the Marine Terminal Supervisor, and are *only for official business.*

Laundry: No laundry facilities are available at Moron.

Formalities: With the Pilot and Marine Office representative a Quarantine Medical Officer will board the vessel and grant pratique, subject to no infectious diseases having been reported on board during the voyage. The ladder should be ready for this purpose before arrival.

On completion of mooring, a Customs inspection is carried out. The Master will be required to furnish particulars of the vessel including bonded stores, cargo, bunkers, and other information. Custom surveillance is strict and store rooms and bar will be sealed. All contraband will be confiscated by the Authorities and fines assessed.

After inspection, a member of the National Guard, as the Customs representative, will ensure that vessels in port comply with regulations. Food and accommodation similar to Officers should be made available to him by the vessel.

Strict compliance with the Customs Laws of the country is enforced by the Authorities, and Masters are strongly advised to caution crew members against attempting to smuggle cigarettes, cigars, tobacco, souvenirs, gifts (particularly items of women's apparel) or other articles. A maximum of twenty cigarettes per person for personal use is allowed to be carried, a greater quantity will result in the imprisonment of the offender with possible heavy fines and delays to the vessel.

The presence of unauthorised craft alongside a ship will render the ship unacceptable. it is the duty of the ship's personnel to see that the ship's side is clear of all such craft.

Harbour Master's representative who boards at the same time issues the required number of shore passes for crew members. These passes must be shown when proceeding ashore to the government guards. They are to be collected by the Master prior to sailing and handed to the Harbour Master's representative.

Masters are requested to have shore leave expire at least two hours before expected departure. Men then found missing should be reported to the CVP Marine Office.

Vessels are not permitted to sail until all crew members are on board, unless said crew members are hospitalised or have previously been signed-off by the Master through the CVP Marine Office.

If any crew member is missing at sailing time and cannot be found, his passport and other personal documents must be handed to the CVP Marine Office as well as written instructions as to his repatriation, when found. All cost and expenses of a crew member so left behind will be for ship's account.

Safety of Personnel: No swimming is permitted within port limits. No fishing is permitted in the manoeuvring area. Chipping and scaling on deck or overside is strictly prohibited within the port limits.

No painting overside is permitted in the manoeuvring area.

No person under the influence of alcohol is to be allowed on deck.

It is strictly prohibited to carry firearms and ammunition, knives or other weapons. These may not be carried while in Venezuelan waters and must be declared on store list. Said arms and ammunition, should be collected and held in the Master's safe custody.

Seamen Left Ashore: In the case of seamen left ashore for hospitalisation, repatriation, desertion or other reason, all documents and personal effects are to be handed to the Marine Office representative before sailing. A letter is required from the Master advising the maximum advances, if any, to be made to the seaman, and instructions concerning his repatriation. All expenses incurred by seaman left ashore, including cost of repatriation are for ship's account.

It is important that the Master bears in mind that the Venezuelan Law will at all time hold the vessel, her Master or Owner responsible for any seaman left behind in Venezuela.

Tank Cleaning and Mopping: Several contractors in the area provide labour for tank cleaning and mopping.

Masters in need of this service should submit requirements to CVP Marine Office, who will contact and request a contractor to go on board to discuss details and estimate cost of work to be effected.

It must be pointed out that the Master of the vessel is solely responsible for the proper fitness of the ship's tanks for loading his next cargo, and will therefore be held liable for any contamination of the cargo after loading, due to inadequate tank cleaning. Therefore, it is up to him to decide the degree of tank cleaning necessary.

Seamen's Club: There is no Seamen's Club at Moron.

Film Exchange: No film exchange service.

Bonded Stores: No cigarettes or bonded stores are available at Moron.

Mail: Ship's mail received after the ship has sailed, or for vessels on which no advice has been received, will be held for 2 weeks and then returned by airmail to the Owners or Operators or senders, at ship's expense, unless specific instructions have been received beforehand.

For a good service please use the following address:

Name of crew member
Ship's name
Corporacion Venezolana del Petroleo
Atencion: Oficina de Marina
Apartado 146, Puerto Cabello – Estado Carabobo
VENEZUELA

Hydrographic and Meteorological Data: The local weather of Moron is on the whole favourable, and the visibility in this area of the Golfo Triste is generally fair to excellent. The climate is considered to be healthy. Easterly winds prevail most of the year. Moron lies far South of the usual Caribbean hurricane tracks but occasionally rough sea and swell are likely to occur.

Trade winds normally blow from the N.E., force 4 Beaufort scale. The average temperature is 28° C. and the density of water is 1028.

Calm days or even Westerly winds may be expected; at this time smog from the neighbouring factories is held in suspension in the atmosphere and visibility is reduced too a very short distance. The phenomena are more deceptive than fog in that mariners are apt to believe visibility to be greater than it actually is.

Provisions: No provisions or ships' chandlers are available at Moron. In Puerto Cabello, there are, but the service is very expensive and possible only on weekdays.

Sufficient Personnel: One qualified Deck Officer must be on deck at all times while the vessel is in port.

Competent crew members must be on deck at all times while the vessel is in port; one watching the mooring ropes, one watching the ladder and the others to ensure proper handling of cargo, or ballast. One responsible member of the ship's crew must be stationed by the ship's main control valves nearest the shore during loading and discharging.

Chief Engineer must provide sufficient and responsible personnel to ensure proper handling of bunkering.

In default of these requirements, the CVP's Marine Office Representative has full authority to stop loading/discharging.

All operations in connection with the starting of loading, discharging, gauging, switching of tanks and topping off must be directly and personally supervised by ship's officer.

Constant Readiness: Vessels must maintain engines and propulsion machinery in readiness to leave the Terminal under full power on short notice.

No repairs are permitted.

Inoperative ships or partially inoperative ships will be rejected. Should they become inoperative while in the Terminal, they will be removed at the vessel's expense.

An efficient watch must be maintained by both deck and engine departments while in port.

A sufficient number of men must be on board at all times for manoeuvring the vessel or for emergency situations.

Suspension of Loading: The Terminal reserves the right to suspend oil handling operations in the event any of the foregoing safety rules are not observed, or in the event of non-compliance with safety rules generally observed by competent tanker personnel. Oil handling operations may also be suspended if any other danger is believed to exist.

Visitors: all visitors to vessels are prohibited, except CVP employees, Petroleum Inspectors and others (technicians, ship chandlers, etc.) whose duties require their presence on board.

Passengers: Passengers will not be permitted to disembark.

Lubricants, Oils and Greases: Certain types of CVP lubricant oils only are available in small quantities. Requirements should be sent by cable in order that the necessary labour arrangements for delivery can be made.

Radio and Radar: No repairs made at Moron. However, with sufficient notice, it is possible to call a technician from Puerto Cabello.

Accommodation: The CVP Marine Office asks the Master to pay attention to everything possible while the vessel stays in port to its representative, as well as providing accommodation according to his rank.

SAFETY: The vessels personnel are responsible for the safety of the vessel and themselves and must take all necessary precautions whether or not so advised by the Marine Office. Any safety precautions imposed by the Marine Office representative and disregarded by the ship's officers or crew will be considered just cause for rejection of the vessel and all expenses related thereto will be for the account of the vessel.

When a ship is at the buoy or in vicinity thereof, its engines must remain on standby with full power for immediate use. Deck machinery shall be kept in instant readiness. *Positively no repairs of any sort will be permitted at the Buoy.* Ship's whistle to be on instant readiness at all times.

The Bridge and/or Control Area shall not be locked or otherwise arranged to prevent immediate entry at all times by the Marine Office representative.

Not less than one deck officer and five seamen shall be on deck, alert and available at all times. No person under the influence of alcohol is to be allowed on deck.

No transistor radio sets or other electrical appliances may be used on deck unless certified for use in hazardous petroleum areas and subject to approval of Marine Office.

All scuppers must be plugged and witnessed by the ship's Master. Refusal to plug scuppers will result in the ship being rejected. Drain trays, sawdust and all materials necessary to clean up any oil spillage on deck to be available for immediate use. Adequate lighting on board as well as on the surrounding sea is required.

After complete discharge of ballast Marine Office representative or petroleum inspector will witness closing of pumproom sea suction and sealing of same.

The presence of unauthorised craft alongside a ship will render the ship unacceptable. It is the duty of the ship's personnel to see that the ship's side are clear of all such craft.

No stores of any kind will be handled while vessel is under "Notice of Readiness".

No stores will be handled while vessel is on the moorings or vicinity thereof.

Fire fighting equipment shall be in instant readiness throughout the vessel and additional extinguishers available at the loading manifold while hose is being connected and disconnected. Water shall be available on deck at all times, and fire hoses connected at all fire stations and flaked out for immediate use.

No radio transmissions will be permitted on board ship except by the express permission of the Marine Office.

When ships are loading or discharging crude or ballast and while tank tops are open or ullage plugs are open, boiler tubes are not to be blown. Every precaution must be taken to see that no sparks escape from the funnel or from the galley stack. No ullage hole shall be left open unless effectively covered with a gauze mesh wire spark arrester. Smoking will be permitted in places approved by the Marine Office representative. There may be occasions when smoking will be entirely prohibited. Cigarette ends should not be thrown overboard or through portholes, at any time.

Lifebuoys should be available in the loading manifold area and at points of entry and exit from the ship.

All personnel should avoid breathing gas escaping from tank ullage plugs whilst loading and gas vents should be used.

Vessel's fresh air masks and resuscitators shall be laid out in a readily accessible position ready for immediate use.

All accommodation doors, port holes and ventilators should be closed during loading operations and doors and openings to machinery spaces in vicinity of ship's tanks to be closed.

There should be laid out on the forecastle deck and poop deck "Fire Towing Wires" of suitable strength.

No swimming is permitted whilst vessels are on the Buoy.

No fishing is permitted within the Buoy or within the restricted navigation area.

Chipping and scaling on deck or overside is strictly prohibited within the port limits.

No painting overside is permitted in the manoeuvring area.

AUTHORITY: CVP/Llanoven.

ORINOCO RIVER: 08.36 N. 60.25 W.

General information, followed by:

Section A – MATANZAS
Section B – PALUA
Section C – PUERTO ORDAZ
(CVG Ferrominera Orinoco)
Section D – PUNTA CUCHILLO
(Lagoven S.A.)

1. As early as possible, advise Puerto Ordaz Radio Station, call letters YVM, giving ETA at Buoy EO of North (natural) channel, or at Buoy 01 of South (dredged) channel.
2. 24 hours prior to arrival, send another ETA to YVM.
3. Upon arrival, depending on whether Master intends to enter Orinoco waterway through North or South channel, adhere to following procedure:
   (a) *North Channel.* Notify Port Captain, Ciudad Bolivar, via YVM, of time of arrival at Buoy EO and give ETA at Beacon G7 (mile 27.7).
   (b) *South Channel.* Request permission to enter from Port Captain, Ciudad Bolivar, via YVM. *Do not enter* until notified by YVM that Port Captain has granted permission; while awaiting, lay to or anchor at least 1 mile outside of Buoy 0.1.
   (c) All vessels must also communicate with the Point Barima pilot station, call sign YV5QE on 2182 kc/s. HF or 43.18 VHF to be informed of traffic.
4. While navigating waterway, inbound or outbound, report position to YVM hourly on the hour.
5. No Pilot required nor available for navigation along North or South channel at the Boca Grande of the Orinoco River.
6. The International Rules for Preventing Collisions at Sea apply outside of Beacon G7, mile 27.7.
7. Given the case of 2 vessels navigating North and South channels respectively the one navigating South channel is the privileged vessel.
8. Anchoring either in North or South channels is forbidden.
9. Throughout Orinoco waterway, the down-bound loaded vessel is the privileged vessel.
10. It is compulsory to fly Venezuelan ensign inside of Buoy EO or Buoy 0.1.
11. Vessels can only carry clean ballast within Orinoco Waterway.
12. Pilotage compulsory within Pilotage Zone No. 1 of the Orinoco. Pilots board at outer boundary of said pilotage zone in upstreamward vicinities of Beacon G7.
13. Regulations for the Pilotage Zone No. 1 of the Orinoco apply inside of Beacon G7.

APPROACHES: (Also see "Radio" – paragraphs *(b)* and *(c)*).

1. *The Waterway*

A Radio Direction Finder, located at Lat. 8° 31′ 45″ N., Long. 60° 28′ 28″ W., transmits following signal continuously: YV – AYV. The transmitter has an output of 500 watts with a range of about 200 miles and operates on a frequency of 305 kc/s. While navigating the waterway, ships should favour the shore on their starboard side to the extent possible, giving preference of manoeuvre to loaded vessels in all cases. Ships navigating upstreamward (inbound), upon approaching narrow channels should await the passing and give way to downbound vessels. It follows, therefore, that downbound loaded vessels are the privileged vessels.

2. *The Boca Grande (Barima Bar) Channels*

There are 2 navigable channels across the Boca Grande (Barima Bar), identified as follows: North channel (or natural channel), and South channel (or dredged channel). The 2 channels have converging courses and meet at mile 27.7 in the vicinity of Beacon G7. Vessels navigating the South channel are privileged, regardless of the direction in which they travel.

(a) The North (Natural) Channel

This channel has a min. depth of 12 ft., referred to Mean Low Water. The approach from the sea is marked by a battery-operated electric flashing black buoy, identified with the letters EO. This buoy is located in 46 ft. of water at Lat. 9° 00′ 10″ N., Long. 60° 18′ 20″ W. Its characteristics are: colour of light, white; flash, 1.0 seconds; eclipse. 6.0 seconds; height above water, 10.7 ft., visibility, 7 miles. From seabuoy EO, the channel develops for 7.3 miles to Buoy EOA on a course of 213° 40′ true, then for 2.8 miles to Buoy EOB on a course of 198° 57′ true. From this point the channel follows an approximate straight course of about 205° true for a distance of 17 miles to Beacon G7. Starting from EOB distances between successive navigation aids are as follows: G1 at 1.9 miles; G1A at 1.5 miles; G3 at 2.1 miles; G3A at 2.3 miles; G5 at 3 miles; EL 24 at 2.6 miles; G7 at 3.7 miles. All navigation aids are black buoys fitted with white lights, except Beacon G7 and EL 24 which is a range structure indicating the West side limit alignment of the South (dredged) channel. This structure has been fitted with a white flashing light to mark the North (natural) channel.

(b) The South (Dredged) Channel

The South channel is a 400 ft. wide dredged channel. Depths therein accommodate the maximum draft authorised by the Port Captain. The approach from the sea is marked by a battery-operated electric flashing black buoy, identified with the number 0.1. This buoy is located in 45 ft. of water at Lat. 8° 55′ 52″ N., Long. 60° 11′ 17″ W. Its characteristics are: colour of light, white; flash, 0.5 seconds; eclipse, 11.5 seconds; height above water, 25 ft.; visibility, 11 miles. From seabuoy 0.1, the channel develops along 4 different courses over a total distance of 27.7 miles to Beacon G7. The course reduces by about 7° true at each of 3 turning points, located at miles 9, 15 and 21 respectively. The initial course of 234° 18′ true continues to mile 9 where it changes to 227° 07′ true. Upon reaching mile 15, the course again changes to 219° 51′ true to mile 21. At mile 21, the course changes to 212° 45′ true to Beacon G7 at mile 27.7. The centreline of the channel on all courses is visually marked by range structures fitted with green flashing, directionally beamed lights. The West (right ascending) side limit of the channel through mile 21 is also visually marked by range structures fitted with amber flashing, directionally beamed lights; the alignment given by the side ranges develops 200 ft. to the West and parallel to the centreline of the channel. Battery operated electric flashing navigation aids are located along both sides of the channel. All navigation aids along the East (left ascending side of the channel are located 325 ft. from centreline or 125 ft. outside of the channel lateral limit. White flashing navigation aids are located at 1 mile intervals through mile 25.1; all aids along this side are black buoys, except beacons 8.1, 9.1, 14.1, 15.1, 20.1, 21.1, 22.1, 23.1, 24.1, 25.1, 27.1 and 27.7 (G7). All navigation aids along the West (right ascending) side of the channel are located 200 ft. from centreline or on the exact lateral limit of the channel. Red flashing buoys painted red are located at 1 mile intervals from mile 1.6 to mile 11.6. From mile 11.6 to mile 27.7, there are only 2 aids; red buoys 13.6 and 26.0.

3. *The River Channel*

From mile 27.7, the navigable channel develops upstream. The river channel is generally deep and wide, except for the following 12 reaches which require periodic dredging: miles 27.7 to 36.5; miles 37.3 to 38.6; miles 53.1 to 54.2; miles 99.0 to 106.5; miles 109.1 to 111.0; miles 131.7 to 131.9; miles 136.6 to 139.0; miles 141.2 to 145.8; miles 146.2 to 149.4; miles 167.6 to 170.8; miles 178.4 to 182.4; miles 183.5 to 184.1. Dredged channels are normally 300 ft. in width, but occasionally can be restricted to a min. of 250 ft. The depth maintained therein can accommodate the maximum draft authorised by the Port Captain. By notice to Mariners, the Port Captain has instructed all Masters and Pilots to reduce speed and to proceed with caution while navigating the aforesaid reaches, especially during the low water season.

4. *River Stages*

In response to the cycle of wet and dry seasons, the flow of the Orinoco River follows a relatively regular pattern of rise and fall each year. The river normally begins rising in late March or early April and continues to rise until it peaks at crest in late August. In September, the river begins a fairly steady recession until the extreme low-water stage is reached, generally in March. The amplitude of stage variation above the low water plane of reference (0.0 ft.) at Palua (Mile 181.7) averages about 35 ft. with min. variations of 31 ft. and max. variations of 39 ft. The effects of the flood rise decrease progressively below Palua and practically vanish in the upstreamward vicinities of the Boca Grande.

5. *Tides and Currents*

(a) The indicated mean tidal range is 5.4 ft. Tidal influence is not experienced above mile 60 during high river stages. At low river stages, a tidal effect can be observed throughout the waterway, although it progressively diminishes, moving upstreamward. However, the tidal effect is still significant at Puerto Ordaz, mile 184, where a max. semidiurnal change of 1.7 ft. has been recorded.

(b) The strength of river currents is generally commensurate with flow, the strongest currents occurring at high river stages. The velocity of currents at any one time generally decreases moving downstreamward. However, in certain locations, this pattern is affected by particular characteristics of river width and shape as well as by bottom gradient. Max. velocities of about 6 knots have been recorded.

6. *Navigation Aids*

(a) The navigation aids installed along the waterway consist of buoys, beacon and ranges. All aids are lighted. Identification is provided by means of numbers representing the approximate mileage of each aid, to the nearest one-tenth of a mile. The last digit of numbers identifying white lighted aids is odd, while the last digit of numbers identifying red lighted aids is even. White lighted aids mark the left ascending limit of the navigable channel, while red lighted aids mark the right ascending limit.

Aids are placed as as to be intervisible, to the extent that — when abreast of any one aid — the preceding and following ones can be sighted. Consecutive aids always carry different light characteristics. Buoys are normally placed on the exact lateral limit of the channel (except for black buoys along the South channel at the Boca Grande); beacons, instead, are located at variable distances outside of the channel.

(*b*) During the execution of dredging along any of the reaches which require periodic maintenance, buoys are generally moved 100 ft. outside of the channel lateral limits. This information is made available to ships by YVM.

(*c*) The Ministerio de Comunicaciones, Direccion de Marina Mercante, publishes semi-annually a complete list of navigation aids. Monthly lists of changes are also published so that the complete current list can be maintained up to date.

(*d*) Upon encountering damaged, inoperative, or misplaced navigation aids, vessels should immediately notify YVM.

(*e*) Vessels are forbidden to make fast to any navigation aid.

7. *Dredging Aids*

Range structures, generally located close to shore or over the bank, are normally used to mark the lateral alignments of the channel along the reaches which require periodic dredging. These ranges are generally fitted with amber flashing, directionally beamed lights. The lights are extinguished except during execution of dredging. Dredging ranges *are not* to be used for navigation.

8. *Navigation Charts*

Navigation charts of the Orinoco Waterway should be aboard vessels for use by the Master. These charts are sold by the Instituto Nacional de Canalizaciones and are also available for purchase from the Orinoco Mining Company. If requested, CVG will, if possible, arrange to make the charts and latest revisions available through the Pilot who boards at Punta Barima, provided such request is received by radio (YVM) at least 48 hours in advance of the Pilot's boarding. A set of navigation charts, corrected to latest revisions, is maintained in the office of the Traffic and Ships' Agency of CVG in Puerto Ordaz. Masters may use this facility to keep their charts up to date.

DOCUMENTS: (Clearance, documentation and other requirements).

1. *Consignment of Inbound Vessels*

The official documents of all vessels proceeding to Puerto Ordaz should show the following consignment: to: CVG Ferrominera Orinoco, Ciudad Bolivar, Zona de Puerto Ordaz. The proper consignment of vessels proceeding to Palua, on official documents, is as follows: Iron Mines Company of Venezuela, Ciudad Bolivar, Zona de San Felix.

2. *Customs Requirements*

Vessels bound for Venezuela in ballast, without passengers, from foreign ports outside the West Indies or Guianas, require the following documentation:

(*a*) Vessels must have a ballast despatch statement (Certificado de Lastre) which must consist of a note from the Venezuelan Consul, if such Consul is present at the port of departure; otherwise, in descending order of desirability, from the Consul of another friendly nation, the local Chamber of Commerce or 2 reputable merchants of the port of departure. The note should include the name and nationality of the vessel, name of the Captain, registration number of the vessel and tonnage, sailing date and assertion that the vessel is en route in ballast, cargo, or with passengers. The note should be given to the Captain of the vessel or his Agent in an open envelope, which the Captain can exhibit in intermediate Venezuelan ports of call and can turn over to Customs authorities in the Venezuelan ports of destination. Under no circumstances may the ballast despatch statement be signed by an Agency of the government of the country from which the vessel is departing.

(*b*) The vessel must have a clearance certificate (Certificade de Zarpe) or sailing authorisation issued by the Customs Authorities of the port of departure, representing the government of the country the vessel is departing from. No consular certification need be placed upon this document.

(*c*) Stores List (Lista de Rancho) signed by Master unless vessel is dispatched from the West Indies or Guianas, then the stores list must be visaed by the Venezuelan Consul at port of departure. Stores list must indicate separately all deck, engine and cabin stores. These lists may be prepared on board prior to arrival.

(*d*) Spare Parts List (Lista de Repuestos). It must contain a note of all the spare parts and objects for the service of the vessel, including fuel. No consular certification required. To be signed by the Master and to be current as of the day of entering the Venezuelan port.

(*e*) List of Effects for use of Captain and Crewmen (Lista de efectos personales de la dotacion). No consular certification required. To be signed by the Master and to be current as of the day of entering the Venezuelan port. The Customs are very strict and will confiscate any article that appears new.

3. *Health, Immigration, and Police Requirements*

Vessels bound for Venezuela in ballast, without passengers, from foreign ports outside the West Indies or Guianas, require following documentation.

(*a*) Current individual International Vaccination Certificates for each member of the crew.

(*b*) Rat Eradication Exemption Certificate. No consular certification required.

(*c*) Crew Lists (original and seven copies). No consular certification required.

(*d*) Panama or Suez Canal or any comparable type measurement certificate.

Contraband: The Venezuelan law is very strict on this subject. It cannot be emphasised too strongly that all new articles, clothing, cigarettes, liquor, etc., must be declared and sealed-up upon arrival.

Meals for Pilots and government officials. It is requested these men be granted the privilege of eating in the officers' dining salon.

N.B. Masters of vessels calling at Trinidad for bunkers before proceeding to Venezuela must also have the documents stamped by the Venezuelan Consulate at Port of Spain.

PILOTAGE: In order to expedite the movement of shipping in the waterways, Masters are requested to establish contact with YVM station as soon as possible, giving ETA pilot station at Barima (Orinoco River entrance). At the same time a radio-telegraph message must be sent to Agents giving ETA Barima and cargo required. When vessels is 24 hours from pilot station, send another ETA via YVM.

After reporting the ETA in advance of arrival, try to contact directly, by radio, the Estacion de Pilotos when the ship approaches the sea-buoy of the bar entrance (about 2 hours before arrival at the pilot station).

After taking the Pilots aboard, report to Radio Marina and continue giving the ship's position according to the mile, up-river, at exactly every hour on the hour, and receive from Radio Marina the pertinent information concerning the traffic in the river waterway. If no communication can be established by voice radio aboard, comply by radio-telegraph by way of the YVM station.

Pilots are employees of the Venezuelan Government and act in an advisory capacity. The Master retains responsibility for the ship at all times.

(1) Pilotage is not required and Pilots are not available for navigation outside the pilotage zone. Masters will take charge of inbound and outbound navigation on the North or South channel outside Beacon G7 at the Boca Grande, without Pilot's assistance.

(2) Pilotage is mandatory within the Pilotage Zone No. 1 of the Orinoco. Inbound vessels will embark the government River Pilot in the upstreamward vicinities of Beacon G7. It is important that vessels pass Beacon G7 and be in sight of the pilot station at Barima in order to avoid any delay, as Pilots may not proceed until vessel is sighted. The government River Pilot will pilot the vessel while navigating the waterway; a special government Docking Pilot will generally take the vessel into and out of the Puerto Ordaz harbour.

Signals

(1) All signals used outside of the pilotage zone (that is to say. seaward of Beacon G7 – mile 27.7) shall conform to the International Rules for Prevention of Collisions at Sea.

(2) Within the pilotage zone (that is to say, inside of Beacon G7 – mile 27.7) the signals used shall be in accordance with the "Regulations for the Pilotage Zone No.1 of the Orinoco". It should be noted that these signals are peculiar to the Orinoco Waterway, and are not necessarily in conformance with the International Rules.

(3) Within the pilotage zone, special signals are used for passing dredgers at work along the waterway.

Speed

The Captain of the Port has the authority to impose speed restrictions. By means of "Notices to Mariners", the Port Captain has ordered that all vessels reduce speed while navigating by the following locations: San Felix Dock, mile 179.8; El Toro, miles 95.4 to 96.6. It is recommended that speed be also reduced while navigating by the Palua Dock (mile 181.8), Barrancas (mile 143.2), and Curiapo (mile 60.4). At the inception of the low water season each year (generally in early January), the Port Captain has in the past issued a "Notice to Mariners" instructing all vessels to reduce speed and proceed with caution while navigating the following river reaches: (1) miles 184 to 178, (2) miles 171 to 167, (3) miles 150 to 141, (4) miles 140 to 137, (5) miles 133 to 131, (6) miles 112 to 109, (7) miles 106 to 98, (8) miles 55 to 53, (9) miles 39 to 36

ANCHORAGES:

(1) No ships are permitted to anchor either in the North or South channel at the Boca Grande. Vessels are to anchor at least 1 mile outside of Buoy EO or Buoy 0.1.

(2) Within the pilotage zone, no vessel is allowed to anchor in narrow channels, nor close to a turn.

(3) Between Beacon G7 — mile 27.7 and mile 137, vessels which need anchoring may do so by coming as close as possible to shore on the ship's starboard side.

(4) Between mile 137 and mile 184, the Pilotage Regulations provide for 3 permanent anchorages and 1 seasonal anchorage, as follows: Area No. 5 (permanent): miles 139.3 to 140.4. Area No. 6 (permanent): miles 150.1 to 151.7. Area No. 7 (permanent): miles 178.0 to 179.0. Area No. 8 (seasonal): at the junction of the Caroni and the Orinoco. It should be observed that Area No. 7, as determined in the Pilotage Regulations, partially encroaches on the narrow (dredged) channel and on shore. Vessels are to anchor in the naturally deep and wide part of the area.

(5) The low-water anchorage (for 1 ship only) previously established by the Port Captain between miles 182 and 183 is no longer in use. This area is currently used as the turning basin for vessels exiting the Palua channel, upon sailing from the new Palua dock at mile 181.8.

(6) If due to emergency a ship is required to anchor in places other than the designated areas, it should do so in such a way as not to obstruct the channel and by taking the necessary precautions to avoid swinging around.

(7) Upon anchoring vessels should notify YVM.

MAX. SIZE:

(1) *Max. permissible draft.* The Port Captain of Ciudad Bolivar can establish the permissible draft for the Orinoco waterway to a max. of about 43 ft.

(2) *Controlling Depths and Authorised Draft*

The draft authorised by the Port Captain for the Orinoco Waterway is made public by means of a "Daily Bulletin of Depths and Draft" (Boletin Diario de Profundidades y Calado). Each daily bulletin issued by the Port Captain carries the following information, in Spanish and English:

(a) Controlling (minimum) depth between miles 184 and 133, and corresponding location.

(b) Controlling (minimum) depth between miles 133 and 42, and corresponding location.

(c) Controlling (minimum) depth between miles 42 and 0, and corresponding location.

(d) Predicted high tides (height and times) at mile 13.5.

(e) River stage (height of river level above low water plane) at Puerto Ordaz and Palua.

(f) Authorised draft, in feet and inches.

The controlling depths given for locations comprised between miles 184 and 42 are actual depths, and reflect depth conditions as of the date of the bulletin. The controlling depth given for locations comprised between miles 42 and 0 is referred to mean low water springs and does not include the height of tide at high water.

The authorised draft may be predicted either on the controlling depth existent between miles 184 and 42 or between miles 42 and 0, dependent upon whichever is the least.

When the controlling depth between miles 184 and 42 is the significant factor, the permitted draft authorised is at least 2 ft. less than the controlling depth in this sector.

When the controlling depth between miles 42 and 0 is the significant factor, the permitted draft authorised is generally less than the mean low water springs controlling depth but occasionally can be equal to the mean low springs controlling depth.

Whenever the MLWS controlling depth existing between miles 42 and 0 does not provide sufficient clearance under the keel of the vessel at low water, the Master is expected to navigate by the site where the controlling depth is located only at times when the height of tide will assure a safe passage.

(3) *Variations in authorised draft:*

(a) The authorised draft is generally increased or decreased by multiples of 6 inches.

(b) Throughout the year the authorised draft is susceptible to variations, according to the conditions of the depth and width existing in the channel at any one time. On the basis of average river stages it is estimated that the authorised draft should be about 33 ft. in the dry season from December to May.

During the rainy season, from June to November, the max. permissible draft may be as high as 43 ft.

HEALTH: Radio pratique may be obtained by sending a message, after picking up Pilot, to the Port Health Officer, advising that there is no sickness on board, name of last port, ETA, number of crew and nationality of vessel and name and nationality of Master.

RADIO:

(a) Communications: Communications are generally handled through the radio-telegraph station at Puerto Ordaz, call letter YVM. This station is operated on a 24 hour basis. The operating frequencies are: 440 kc/s; 472 kc/s; 4322 kc/s; 6505.5 kc/s. The GMT — CQ times and frequencies are: 0900 hours, 4322 kc/s; 1200 hours 6505.5 kc/s; 1430 hours 8722 kc/s; 2000 hours 8722 kc/s; 0030 hours 8722 kc/s; 0300 hours 4322 kc/s.

There is no charge for messages from ship to shore or from shore to ship handled directly through YVM. A VHF frequency modulated radio system provides voice communications along the Orinoco Waterway. Master sets for the system are installed in the Puerto Ordaz radio-telegraph station (voice call: "Master Radio"); Marine Radio handles shipping matters exclusively, The system consists of a high-band VHF frequency modulated voice radio net. To ensure a more efficient and satisfactory coverage, this system operates on dual frequencies alternating according to location, so that ships can either transmit on 161.700 mc/s receiving on 159.000 mc/s, or transmit on 161.150 mc/s receiving on 159.850 mc/s. For best results, ships should select frequencies according to the following: From sea to mile 50: transmit on 161.700 mc., receiving on 159.000 mc.; From mile 50 to mile 112: transmit on 161.150 mc., receiving on 159,850 mc.; From mile 112 to mile 159: transmit on 161.700 mc., receiving on 159.000 mc.; From mile 159 to mile 184: transmit on 161.150 mc., receiving on 159.850 mc.

Pilot station at Barima Bar, Palua and Matanzas are equipped with this system. For the Puerto Ordaz area, ships will transmit to Marine Radio on a frequency of 43.02 megacycles and to others on a frequency of 43.18 megacycles, receiving in both cases on a frequency of 43.18 megacycles.

(b) Control of Navigation:

(i) Navigation on the North (natural) channel at Boca Grande is free. However, vessels are requested to notify the Port Captain, Ciudad Bolivar, via YVM, upon arrival at Buoy EO, giving ETA at Beacon G7, mile 27.7.

(ii) Simultaneous navigation in opposite directions by 2 or more vessels is not permitted on the South (dredged) channel at the Boca Grande. The restriction is placed on inbound traffic, to the extent that any vessel wishing to enter the South channel requires prior authorisation from the Port Captaincy of Ciudad Bolivar. The request for permission to enter the South channel is to be addressed to the Port Captain, Ciudad Bolivar, via YVM, and is to be transmitted before the vessel reaches Buoy 0.1. Upon receipt of the request, the Port Captain will notify the vessel via YVM whether permission is or is not granted, indicating, in the latter case, the approximate waiting time. Until permitted to enter, vessels are to anchor at least 1 mile outside of Buoy 0.1. Once that authorisation has been granted, vessels are to enter the South channel at the earliest opportunity. Any vessel which has been notified to wait may elect to proceed and enter through the North (natural) channel; in this case, the vessel will have to satisfy the requirements outlined in paragraph (1) above.

(iii) While navigating the Orinoco Waterway inbound or outbound vessels are to report their position to YVM hourly on the hour.

(c) *Accident, Stranding, etc.*

(i) Should a collision, stranding or other accident occur in the waterway, or should it be found necessary to take control of the vessel away from the pilot for any reason, the Venezuelan law requires that a written report be made to the Captain of the Port by the Master of the vessel involved within 24 hours. The report is to be addressed to the Captain of the Port and may be handed to the Pilot or the ship's Agent for delivery. The Master need not appear in person before the Captain of the Port unless specifically ordered to do so.

(ii) Slight groundings or touching of banks and bottom may simply be noted on the reverse side of the receipt for pilotage signed by the Master.

(iii) In case of collision, stranding, slight grounding, touching of banks and bottom, or other accidents, vessels should immediately notify YVM.

Section A

MATANZAS: 08.17 N. 62.50 W. (See Plan Book)

N.B. See "Orinoco River" for all important entry requirements.

OPERATORS: CVG Siderurgica del Orinoco CA.

ANCHORAGES: Between miles Nos. 195 and 197, Orinoco River.

MAX. SIZE: Length 600 ft., breadth 74 ft., distance between rail and hatch combing 23 ft., max. draft 30 ft. in rainy season May to November, and 26 ft. in dry seaon.

RADIO: See "Orinoco River". Cables address of Matanzas terminal operators is "Sidor Matanzas - Telex 22709" and cables may be routed through Caracas, Curacao or Trinidad Radio.

TUGS: Every vessel over 2,000 registered tons is required to use a tug when berthing. Tug is 1,600 h.p.

BERTHING: Undertaken day or night. Length of quay 300 m. Depth alongside 28 ft. (Summer), 60 ft. (Winter).

There are 2 gantry cranes for bulk cargo, capacity 20 tons, can also be fitted with electro-magnets. 3 gantry cranes with fixed jibs for general cargo, capacity 5 tons, can also be fitted with electro-magnets.

MEDICAL: Private hospital and several doctors available.

TIDE: 6 inches rise and fall at the berth. Current, in Winter 6 knots; in Summer 1.5 knots.

FRESH WATER: Available at rate of 12 metric t.p.h.

FUEL: Available in emergency.

CUSTOMS ALLOWANCE: 200 cigarettes and 1 bottle spirits allowed per crew member for personal consumption.

IDENTIFICATION CARDS: Provided by authorities, and necessary if crew going ashore.

REPAIRS: Local workshops undertake minor repairs.

AIRPORT: Distant 10 miles. 6 flights a week to Caracas.

HOLIDAYS: No work on 1st January, Maundy Thursday, Good Friday, 1st May and 24th December. Work can be arranged on other holidays.

DEVELOPMENTS: The existing quay is being extended by 430 m. Depth will exceed 42 ft. in Summer. Water and fuel services will be available. New equipment includes 6 semi-gantry cranes with capacity of 30 tons and a fixed heavy lift crane with 400 tons capacity.

Section B

PALUA: 08.21 N. 62.41 W.

N.B. See "Orinoco River" for all important entry requirements. Specific details, relevant to Palua only, are as follows:

SUPPLIER: The ore supplier is Iron Mines company of Venezuela, cable address El Pao San Felix (Venezuela). Their Palua office is fitted with VHF radio-telephone on 161.150/159.850 megacycles and 2182 (call) kilocycles.

CLEARANCE: Agent will secure the Clearance dispatch.

Note: The Palua dock and facilities are the private property of Iron Mines Company of Venezuela. All Company regulations must be obeyed by vessels and vessels personnel.

The Bill of lading will be prepared by Iron Mines Company of Venezuela, also the Commercial Invoice on the Consular Invoice form 138. The Inward Foreign Manifest, U.S. Customs form 7527-B, should be prepared by Master after sailing from Palua.

MAX. SIZE: Max. Draft 43 ft. Max. d.w.t. 70,000 tons.

BALLAST: To provide the best manoeuvring trim on docking, it will be at the discretion of the Master to properly ballast the vessel. But in order to lose no time on loading operations, as well as to prevent short loading, the ballast should be pumped out as soon as possible, using utmost caution not to pump oil or sludge overboard in the port area.

APPROACH AND DOCKING IN PALUA: After passing the village of San Felix, and before reaching the turn off from the main channel, a tug and a Docking Pilot will meet the vessel and will assist in the docking manoeuvre. Although the Master will always be responsible for the vessel's movements either in the case of docking or undocking, the Docking Pilot will actually pilot the vessel to, and dock the ship at Palua.

At mile 180.5 the ship should leave the main channel, turning to the left to follow the new dredged entrance channel of approach which is marked by 2 flashing buoys: white on the port and red on the starboard side. Diamond-shape range marks of 6 ft. side, painted white with black diagonal cross, indicate the centre line of the approach channel. The front range, fastened on the ore loading pier, shows flashing green light, and the rear range, set on a tower shows flashing green light, and the rear range, set on a tower approximately 2,000 ft. away, has fixed green light.

The docking shall be port side to in all events; and please stow all hatch boards, or pontoons, or steel battens, etc., on the starboard side of the hatch as this will keep the gear cleaner and lessen the work of the ore handling gang.

The dock will provide a gangway for access to the ship. Nothing should overhang the port side of the vessel on docking.

If the loading berth is not available the arriving vessel would be instructed to anchor at an anchorage just below the entrance to Palua approach channel at mile 179.

LOADING DOCK: The ore loading port is located at mile 181.5 of the Orinoco waterway, along the left bank going up-river. The new steel dock here is aligned up and down stream in the general direction of the current. It is 907 ft. long between its pointed heads, with 791 ft. of boarding side along, the deck fixed at about 6 ft. over the maximum rise of the river in the flood season. It has a strong fender system of steel structure covered with timber overhanging the side, down to near the lower river stage; and is fitted with 14 bollards plus 2 more, one on each head, for proper docking and securing the vessel.

Once the vessel is moored alongside the new ore loading dock, there shall be no further shifting necessary to load, as the loading tower moves along the dock on rails to facilitate the loading through the various hatches.

LOADING: The ore handling and loading equipment for Palua has a capacity to load 3,000 metric tons of ore per hour, for the time being. With this capacity, the vessel's mooring lines should be tended during the operation.

The boom of the loading tower is so designed as to allow free movement in any direction, fore and aft. The gantry and boom travel along the dock for a distance of 518 ft., and can place the ore at a distance horizontally out from the dock fenderline of 23 ft. min. and 62 ft. max. at the highest water stage, and from min. 29 ft. to max. 67 ft. horizontally out at the lowest stage.

Care must be taken during the course of loading to avoid piling the ore too high in the holds, as this necessitates hand trimming before the hatch covers can be properly secured, and incurs unnecessary trouble.

UNDOCKING: The Master, assisted by a Docking Pilot, if required, will handle the vessel on leaving the dock, going upstream from the dock not less than 0.75 miles distance to the turning basin in the same heading as when the ship moored alongside. 1 tug (or 2 tugs if required), will go alongside the ship prior to undocking and will assist the vessel until it is headed downstream in the main Orinoco channel. The amber lights at the heads of the dock form a range to mark the shoreside boundary of the local dredged channel. A red light high up on the loading gantry will come in the same range as the 2 amber lights. In the turning basin a tug-boat will assist the vessel swinging downstream.

When the ship is in the main channel, properly headed downstream, the Docking Pilot will leave on the tug, and the River Pilots (2 of them) will assume the navigational direction. Report to Radio Marina by voice radio and give ETA at mile 31.

Report again to Radio Marina giving position every hour, and try to contact Barima Pilot station sometime before arrival at mile 31, where the Pilots will disembark.

If voice radio communication is not possible, comply by radio-telegraph by way of the YVM station.

HEALTH: The vessel will be boarded by the Public Health Doctor after docking at Palua; unless instructions to the contrary.

In the event that the Authorities have to board the vessel anchored out in the stream, an accommodation ladder should be rigged, preferably on the starboard side, to keep the port side clear for docking. Venezuelan authorities and workmen will not use Pilot ladders.

REGULATIONS: The Master, members of the crew and passengers if any, are required to have in their possession individual smallpox vaccination certificates. Serious delays may result in the dispatch of the vessel if this requirement is not complied with.

The Venezuelan law is very strict on the subject of contraband. It cannot be stressed strongly enough that all *new* articles, clothing, cigarettes, liquor, etc., must be declared and sealed up on arrival.

Concerning passes, the regulation states that "members of the crew who are not officers of the vessel, in order to go ashore and return aboard, have to be supplied with an identification card to be issued by the Purser of the vessel or his substitute, which card will contain the name of the vessel, the name of the crew member and the date of issue. This card will have to be signed by the person issuing same and has to be authorised by the respective officer of the Port Captain's office for the district".

GAS-FREE CERTIFICATE: Vessels reporting to Palua to load ore should have the holds and cargo compartments swept clean and ready to receive cargo. Also, any combination ore/tanker vessel tendering to load iron ore at Palua shall present, along with the notice of readiness, a Gas-free Certificate if said vessel has in the past been employed in the carriage of petroleum products. Such certificate shall be dated subsequent to the discharge of the vessel's last petroleum cargo. But they are advised that around Palua in Venezuela there is no chemist available for granting such a Gas-free Certificate. It may be secured before arriving at Venezuela by calling at Trinidad, reporting to cable address: Harriman, Port of Spain.

In case of necessity, or for convenience, it could be arranged for the chemist to travel to Venezuela to meet the ship in Palua, advising Harriman (Port of Spain) at least 3 days before arrival at Palua.

If the vessel is equipped with a gas-indicating meter (explosimeter), Iron Mines Company of Venezuela will accept the Master's certification in writing that the vessel is gas-free. However, they reserve the right to check the vessel with their own equipment prior to acceptance.

RADIO: Should a vessel receive radio advice at sea to proceed to Palua, and the clearance is to another port, the Master must radio to Agents and advise the name of the vessel, flag, port of embarkation, original port of destination, Captain's name and the number of members in the ship's crew including the Master. This is necessary in order to comply with the Venezuelan Custom Law.

CONSULS: At the present time there are no Consular Agents located around Palua, the nearest being in Ciudad Bolivar or Caracas.

FLOOD SEASON: The port experiences a yearly flood season from the middle of June to the middle of November, to a max. of about 38 ft. at the last days of August, above the lowest stage (during the first days of April) in the dry season that occurs from the middle of November to the middle of June.

TIDE: The wind in the locality blows generally upstream, and on exceptional occasions during the dry or low-river season, when the current is weak, does overcome the current and cause the anchored ships to tend with stern upstream.

REPAIRS: Minor emergency repairs of mechanical, electrical and electronical types may be carried out in the shops by the personnel of the Iron Mines Company of Venezuela. The American Bureau of Shipping has a surveyor at Puerto Ordaz, near Palua.

MEDICAL: There is a medical dispensary at Palua, and a hospital of the Company at El Pao, where seamen may be admitted when requiring hospitalisation in emergency cases.

FUEL: All grades of bunker fuel are available at Palua, delivered by barge.

FRESH WATER: Drinking water is available at the dockside in limited quantity of about 100 tons every 24 hours. Small amounts of fresh provisions may be obtained in the locality.

Section C

PUERTO ORDAZ: 08.21 N. 62.43 W.

OPERATORS: CVG Ferrominera Orinoco.

LOCATION: The operations of the CVG Ferrominera Orinoco are centred in the State of Bolivar in Eastern Venezuela and iron ore is loaded into ocean-going vessels at Puerto Ordaz 8° 21′ N., 62° 43′ W., at the junction of the Caroni and Orinoco Rivers, approximately 184 nautical miles from the open sea.

GAS-FREE CERTIFICATE: Any combination ore-tanker vessel tendering to load iron ore at Puerto Ordaz shall present, along with the notice of readiness, a gas-free certificate if said vessel has in the past been employed in the transportation of petroleum products. Such certificate shall be dated subsequent to the discharge of the vessel's last petroleum cargo. Gas-free certificates can be obtained through an approved surveyor in Puerto Ordaz.

HEALTH: Vessels will be boarded by the Public Health Doctor in the stream off Puerto Ordaz. He will not come up a Pilot ladder and will insist on an accommodation ladder which should be rigged and ready when he approaches. In order not to delay docking, this accommodation ladder should be rigged on the port side during low river stage, and starboard side during high river stage.

RADIO: Should a vessel receive radio advice at sea to proceed to Puerto Ordaz, and the clearance is to another port, the Master must radio station YVM Puerto Ordaz, and advise the name of the vessel, flag, port of embarkation, original port of destination, Master's name and number of members in the ship's crew. This is necessary in order to comply with article 17 of the Venezuelan Customs Law.

TUGS: All vessels touching at Puerto Ordaz will be assisted by a tug in docking and undocking manoeuvres. Line-handlers are available on the dock to secure mooring lines on vessel's arrival, and to release them on vessel's departure.

BERTHING:

1. **The Harbour:** The Puerto Ordaz Harbour extends from mile 183.5 to mile 184.1 of the waterway. The harbour consists of a natural basin formed by the mouth of the Caroni as it flows into the Orinoco. The width of the turning area within the basin varies from a min. of about 1,600 ft. at low water to a max. of about 2,000 ft. at high water. The lighted buoys marking the navigable limits on either side of the harbour are moved to different positions according to river stages in order to achieve full utilisation of navigable waters. The bottom of the harbour is generally rock, with scattered layers of sand overburden deposited as sediment by the river. This sand is regularly removed by dredging in order to maintain depths which will accommodate the maximum draft authorised by the Port Captain. The bottom configuration across the harbour consists of a rocky shelf extending about 900 ft. from the face of the dock. Beyond this shelf the bottom slopes steeply into a deep gorge, then rises to form a sandy beach along the opposite shore. The velocity of river currents at this site varies according to stage levels. A slower current is generally experienced over the rocky shelf adjacent to the dock, with velocities averaging about 1.5 knots at flood stages and about 0.5 knots or less at reduced river stages. The velocity of the current over and along the deep gorge averages about 3.5 knots at flood stages and 1.5 knots or less at reduced river stages. During extreme low water, the basin is subject to tidal influence and the velocity of currents is minimal, although there is no reversal of flow. The direction of the current is aimed slightly toward the face of the dock at its S.E. end but deflects away from the pier about 500 ft. downstreamward. Access to the harbour is by way of a naturally deep and wide fairway which is the continuation of the gorge as it enters the Orinoco River.

2. **The Dock:** The Puerto Ordaz dock is located along the right ascending side of the harbour and extends outward from shore on a S.E. by East alignment. The all-steel fixed-height dock is 1,885 ft. long; its elevation is 41 ft. above low water plane (0.0 ft. stage). This dock is fitted with a strong fender system and with a sufficient number of accessible bollards for proper docking and securing.

3. **Arrival:**

(a) Notice of Readiness: When completely ready to receive cargo, vessels will submit "Notice of Readiness" to CVG Ferrominera Orinoco. Vessels will be loaded in the order in which Notices of Readiness are accepted by CVG Ferrominera Orinoco. The Company will advise when the vessel may proceed alongside the dock.

(b) Docking: Special Docking Pilots are provided for the docking and undocking of vessels at Puerto Ordaz. These Pilots are qualified River Pilots, thoroughly familiar with local conditions. All vessels will dock starboard side to. During the low water stage, which is from the middle of November to the middle of June, no gangway should be rigged and nothing should overhang the starboard side of the vessel. When the river is sufficiently high which is from the middle of June to the middle of November vessels are requested to have starboard gangway or accommodation ladder rigged and ready to lower immediately after docking in order to expedite the commencement of loading. Venezuelan authorities and workmen will not use Pilot ladders. Vessels reporting to Puerto Ordaz to load ore should have holds and cargo compartments broom clean and ready to receive cargo. Considerable time will be gained if this requirement is met prior to reporting.

(c) Hatches: On arrival at Puerto Ordaz all hatch boards or pontoons, beams, tarpaulins, steel battens, wedges, etc., should be stowed on the port side of the hatch. This will keep the hatch gear cleaner and lessen the work of the ore handling clean-up gang.

(d) Ballast: In order to lose no time with the loading operations, as well as preventing short-lifting, all ballast should be pumped out before arrival at the dock. Use utmost caution not to pump oil or sludge overboard in the port area. CVG Ferrominera Orinoco Ships' Agency Representative will contact vessel on arrival and will assist in every way possible.

4. **Departure:** All vessels which have completed loading at Puerto Ordaz and have received the latest river information from the port officials, and are ready for their river transit in every respect, will proceed outward via the Orinoco Waterway, disembarking the Pilot at mile 31. Once the Pilot has disembarked, vessels shall proceed over the South (dredged) channel to mile 0, and exit the waterway.

TANKERS: See "Punta Cuchillo".

MEDICAL: There is a hospital at Puerto Ordaz which will admit seamen requiring hospitalisation.

FRESH WATER: Drinking water is available alongside the dock.

FUEL: Bunker "C" and diesel oil is available.

CONSULS: An Italian consulate Agent at Puerto Ordaz, nearest consuls for other countries at Cuidad Bolivar or Caracas.

REPAIRS: Minor emergency repairs may be carried out in the shops of CVG Ferrominera Orinoco.

TIME: The legal time of Venezuela, which is 4 hours behind GMT, shall be used in Pilotage Zone No. 1 of the Orinoco river.

SHORE LEAVE: Permitted, but it is mandatory that all crew members should report back to their respective ships before sailing time.

GENERAL: 1. *Ore Loading Equipment:* The ore handling and loading equipment installed on the pier has a speed ratio of 6,000 long tons of ore loaded per hour. Due to this great loading capacity the vessel's mooring lines must be tended at all times.

2. *Handling Facilities:* A movable 110-ton, rail mounted stiff-leg derrick is installed on the dock for the handling of general cargo.

3. *Provisions:* Small amounts of fresh provisions are available.

4. *Surveyor:* The American Bureau of Shipping has a non-exclusive surveyor in Puerto Ordaz. Lloyds has an Agency in Ciudad Bolivar with a branch office in Puerto Ordaz, and will appoint surveyors upon request.

AGENTS: Mailing Address: CVG Ferrominera Orinoco C.A., Agencia de Barques, Puerto Ordaz. Telex No. 86249 (ORINADM).

CVG Ferrominera Orinoco acts as ship's Agent for all vessels consigned to load iron ore at Puerto Ordaz. This function is performed by the Superintendent, Traffic & Ship's Agency and his staff, whose offices are located adjacent to the loading dock at Puerto Ordaz.

Section D

PUNTA CUCHILLO, (Puerto Ordaz Terminal): 08.20 N. 62.47 W. (See Plan Book)

N.B. See "Orinoco River" for all important entry requirements. Specific details relevant to Punta Cuchillo only are as follows:

OPERATORS: Lagoven S.A.

LOCATION: The terminal and dock is located near Mile Post 192 on the South side of the river.

PILOTAGE: Government Pilot will pilot vessel to Puerto Ordaz. In some cases this same Pilot will act as Mooring Pilot and dock vessel at the terminal. If River Pilot does not also act as Docking Pilot, the River Pilot will disembark at mile 178 during low water, and mile 183, in high water, and a Docking Pilot will embark and take the vessel to mooring.

Pilots are obtained at the G7 buoy of the old channel, which is the same as Buoy 27.7 of the new channel and is located 5 miles West of the old lighthouse at Punta Barima at Lat. 08° 36′ 00″ N., Long. 60° 30′ 40″ W. It is important that vessels pass this buoy and be in sight of the Pilot Station (1 mile E.S.E. of Punta Barima Lighthouse), as pilots will not proceed to the vessel until it has been sighted.

RADIO: Vessels diverted at sea to Punta Cuchillo which do not have a Venezuelan clearance on board, must advise Lagoven by radio as soon as they receive their orders to change destination. The following information must be given: Master's name, vessels flag, net tonnage, last port of call, port to which originally cleared and ETA. This information is required in order that inward clearance may be arranged with government officials in ample time prior to vessel's arrival. In absence of this information, vessel will be subject to a fine.

MAX. SIZE:

Gauge Reading	*Maximum Draft*	*Tide Required at Bar*
12–14 ft.	33 ft.	None
14–17 ft.	34 ft.	None
17–20 ft.	35 ft.	None
20–23 ft.	36 ft.	None
23–26 ft.	37 ft.	None
26–29 ft.	38 ft.	None
29–32 ft.	39 ft.	None
32–35 ft.	40 ft.	None
35–38 ft.	41 ft.	half of high tide
38–41 ft.	43 ft.	half of high tide

HEALTH: Vessel will be boarded by the Public Health Doctor in the stream off San Felix or Puerto Ordaz or occasionally at the Terminal. If he boards before docking, an accommodation ladder should be rigged and ready when he approaches, as he will not come up a pilot ladder.

All Masters, members of the ship's crew, and passengers, if any, are required to have in their possession individual smallpox vaccination certificates. If this requirement is not complied with, a serious delay may result in the dispatch of the vessel.

BERTHING: The dock at the terminal consists of a docking platform, 2 breasting dolphins and 2 mooring dolphins. The docking platform is connected to shore by a 10 ft. causeway capable of carrying a light truck.

At mean low river stage, water depth at the face of breasting structures is 40 ft. The bank rises sharply from face of dolphins toward shore. The 40 ft. depth contour extends parallel to shore for a considerable distance upstream and down stream from the dock, allowing a flat approach angle.

Current is negligible during low river stage and is approximately 6 knots at midstream at high river stage. Current runs generally parallel to the face of the dock at the dock site.

Top of dock elevation is 45 ft. above low water stage. Buffering system extends from a point below low water stage to a point immediately below top of dock. Nothing should overhang the shoreward side of the vessel when docking during the lower stages of the river. The buffering system is designed to accommodate forces exerted by a vessel of 47,000 tons displacement, approaching the dock with a velocity component perpendicular to the dockface, of 0.5 ft. per second.

Bollards for vessel's lines are provided at the mooring dolphins and at the breasting structures. Mooring dolphins will safely withstand 200,000 lbs. of mooring line tension.

The facilities include a 24 in. diameter submarine pipe-line which crosses the river a short distance down-stream of the dock. The crossing is marked by triangular-shaped signs on both banks of the river. Masters are cautioned against use of vessel anchors in this area.

The terminal pumps are capable of loading oil aboard ship at the rate of approximately 14,000 barrels per hour.

INWARD CLEARANCE FOR DIVERTED VESSELS: Vessels diverted to Puerto Ordaz to load cargo should submit all documents, except consular mail, which they will not have. In lieu of this, they should submit 4 copies of the cable to divert, leaving enough space for the translation in Spanish. Vessels diverted at sea to Puerto Ordaz (Lagoven Terminal) which do not have a Venezuelan clearance on board must advise Lagoven at Puerto Ordaz, by radio as soon as they receive their orders to change destination. The following information must be given: Masters name, vessels flag, net tonnage, last port of call, port to which originally cleared and ETA. This information is required in order that inward clearance may be arranged with government officials in ample time prior to vessels arrival. In absence of this information, vessels will be subject to a fine.

SAFETY: The following is a condensation of the safety precautions that should be observed when the vessel is alongside the dock:

(i) All passageway doors leading to the cargo deck areas are to be kept closed during cargo-loading operations.

(ii) Ship's firefighting equipment must be kept ready at all times while berthed at Lagoven dock.

(iii) Smoking or carrying lighted or unlighted pipes, cigars or cigarettes on the weather decks of the vessel, or on the dock, is strictly prohibited under all circumstances. Masters are requested to instruct their crew not to throw lighted cigars or cigarettes over the side or out of the portholes.

(iv) An efficient watch must be maintained on deck and in the engine-room on the vessel, and a sufficient number of men must be on board at all times to move the vessel any time, in case such is required.

(v) If the galley is located near oil-handling operations of any nature, the skylight lids should be kept down and secured to prevent the galley being sprayed with oil in the event of a burst hose.

(vi) Ventilators in the vicinity should be turned away from the scene of operation.

TUGS: The use of tugs is necessary in docking and undocking manoeuvres of boats at this Marine Terminal. Alcoa has a 2,100 h.p. tug available for this service. A tie-up launch will be provided to assist in the mooring of the vessel, and will handle all the mooring lines before and after loading.

LOADING: Monagas crude is the only cargo available at the Puerto Ordaz Terminal. This crude has an API gravity of 11.9° to 12.5° F. (6.490–6.517) U.S. barrels per long ton. This cargo must be heated to approximately 140° F. in order to attain normal discharge rates.

Loading is accomplished through 3×10-in. hoses provided with 10-in., 150 lb. ASA flanges. Hoisting gear is provided for handling the hoses. A dock crew will connect the cargo hoses and disconnect them on completion of loading. Some adapters and other tools are available on dock. The oil will be loaded at an elevated temperature.

Precautions, as are common for any heavy oil, should be taken to ensure that no ballast water is left in any tank to be filled with this oil. If the cargo is contaminated with water, the water will not separate from the oil. The salt content of the oil will be raised approximately 10 lb. per 1,000 barrels for every 0.10% contamination by sea water.

All cargo compartments must be stripped dry. Cargo pipe-lines should be drained and/or purged of water.

There is no provision at the Puerto Ordaz Terminal for disposal of dirty ballast or tank washings. Tankers bound for Puerto Ordaz for loading must dispose of all dirty ballast and tank washings before entering the Orinoco River.

Prior to proceeding to sea, all butterworth plates, cargo tank hatch covers and ullage plugs should be inspected to ensure against entry of salt water.

FRESH WATER: Fresh water is available ex-barge; cable advice of 24 hours is required. Dry provisions may be obtained in very limited quantities.

FUEL: Bunker fuels are available at all hours from Astilleros Orinoco C.A., who operate a floating storage and blending facility in the Orinoco River. Bunker fuels may be received at Lagoven dry dock while loading crude. Fill cargoes can be made available.

TIME: GMT minus 4 hours.

MEDICAL: Medical assistance can usually be arranged, particularly in the case of an emergency.

REPAIRS: No major repair facilities are available. However, small repair jobs can be taken care of through local machine and electrical shops, and shore labour can be obtained if required.

AGENCY: Lagoven handles all papers and documentation connected with the ship's business. Lagoven will also help the ship's Master in providing required land transportation, limited provisions, or any other assistance that may be required for the operation of the ship's normal business. Alcoa will also assure that the ship's requirements are met in regard to Sanitary Inspection, Customs Inspection and Guardia Nacional.

PERTIGALETE: 10.15 N. 64.34 W.

LOCATION: Situated in a sheltered bay about 2 miles East of the port of Guanta, or about 4 miles from the pilotage zone situated in the North.

PILOTAGE: The pilotage zone in Pozuelos Bay is the same as for Guanta, i.e. an area situated between the islands of Borracha and Chimana, in the Bay of Pozuelos (formerly called Bergantin Bay).

From the pilotage zone for the port of Guanta/Puerto La Cruz, the private pier Pertigalete is to be approached by sailing between the Isla de Plata and the island of Cachicamo. Pilotage is compulsory in and out and is performed by well-trained government Pilots. The navigation is considered very safe.

MAX. SIZE: The depth of water for ocean-going vessels alongside the Pier is 20 ft. (shore side) to 40 ft. (sea side).

TUGS: Available from inward clearance port at Guanta/Puerto la Cruz.

BERTHING: The private pier in Pertigalete for berthing ocean-going vessels is up to 150 m. (492 ft.) long. The apron is ample and allows easy manoeuvre of trucks with cement. On the same pier the cement factory is regularly receiving raw material and machinery, but the berthing is along the West side of the pier for coastwise trade, so does not interfere with operations for ocean-going vessels. There are chutes, conveyor belts from the nearby silos, and a heavy crane.

TANKERS: Berth at private wharf at Pamatacualito, operated by Baroid de Venezuela SA.

Length of berth 113.60 m., depth alongside 10 m.

LOADING: The cement factory is able to deliver to the pier 2,000 to 2,300 bags per hour, to be loaded simultaneously into arrived vessels. According to experience load rate is about 300 bags per hour and gang by steam winches, and about 400 bags per hour and gang by electric or hydraulic winches.

STEVEDORES: Loading operations are performed exclusively by the personnel of the cement factory. Winchmen are also supplied by the cement factory. All costs, including overtime, are for account of the cement factory, inclusive of stowing and trimming the vessel.

Under normal conditions on Saturday afternoon there is no work, but almost without exception the cement factory works overtime on Saturdays if by doing so the vessel can be despatched that day. On holidays, if circumstances call for urgent operation, the cement factory has the option to work overtime. Work on Sunday is prohibited.

AUTHORITY: Private pier of C. A. Venezolana de Cementos and is under the jurisdiction of Customs and Harbour Master of Guanta/Puerto la Cruz, Eastern Venezuela. All charter business and general administration is covered by Caracas Headquarters of C.A. Venezolana de Cementos.

AGENTS: Head Office (Management and Control), Brokers Chartering and Tramp Agents, Victor H. Selinger, S.A., PO Box 1632, Caracas. 101. Cables: "Selvic" or "Seltank". Tel. (02) 81.02.71. Telex: 21402, 21934, 22859, 21631. Local Office: PO Box 4194 Puerto La Cruz. Tel. (081) 662107, 662665. Telex: 81340. Cables: Selvic Puertolacruz, Seltank Puertolacruz.

PUERTO CABELLO (inc. Barburata): 10.29 N. 68.07 W.

PILOTAGE: Pilotage is compulsory and vessels have to wait for Pilot in the pilotage zone, West and N.W. of the port entrance (S.W. of Punta Brava).

MAX. SIZE: Bulk Cargo Pier: up to 32 ft. draft. Inner Port: up to 28 ft. draft. Also see "Tankers".

TUGS: The use of tug-boats within the port is compulsory both for entering and leaving port, as well as for manoeuvres in the port basin, for foreign flag ships over 300 tons.

BERTHING: The port entrance is 100 m. wide in direction West to East. Berth No. 1 and half of Berth No. 2 are along the same entrance channel, where ships are berthed only as an exception or when the port is rather congested. The total length of the North (main) Pier for the berthing of ocean-going vessels is 1,025 m., room enough for 6 to 8 vessels. For administrative reasons the pier is divided into 8 berths of about 128 m. each. Between Berths No. 2 and 3, the pier is bent Southwards. Along the pier there are warehouses which under normal circumstances provide sufficient indoor space.

Along the East Pier, of 350 m. length, there are no warehouses. This pier gives berthing facilities to 3 or 4 middle-sized vessels.

Along the South Pier, of 500 m. length, there are 2 warehouses. This pier is exclusively used for coastwise shipping, fishery and small craft in general.

The dredged channel along the East Pier is only 80 m. wide. This is the only channel which connects the main basin of the port with the South basin of the port, the latter served through the South Pier.

BULK-HANDLING FACILITIES: 400 m. long new pier, designed exclusively for the handling of bulk cargoes.

This bulk cargo pier has an apron of about 25 m. and allows ships with a draft of 10 m. at any time.

Ships moored along this new pier are not able to take water there, but have to be shifted to the general cargo piers in the port of Puerto Cabello.

There is no telephone installation on the new pier.

Tug-boat service and assistance of Pilots is compulsory to negotiate the distance to and from the bulk cargo pier.

General cargo is not allowed to be handled at this pier. There are no cargo handling facilities whatsoever and no kind of rolling equipment either. All the vessels, unless they have up-to-date discharging equipment of their own, have to provide derricks of minimum 5 tons capacity to support the SKT discharging equipment of receivers. The cargo is discharged in bulk cargo trucks, fully closed and with only rather narrow manholes for the SKT arm.

The new grain terminal has been opened. The wharf is 400 m. long and allows 2 vessels to berth. Max. depth 30 ft. Average discharge rate 1500 tons per day.

TANKERS: *Borburata:* The Maroven Terminal lies about 2 miles East of the port entrance.

Berth No.	*Max. length*	*Max. beam*	*Max. draft*
1	400 ft.	—	20 ft.
2	575 ft.	72 ft.	31 ft.

No. 1 berth is used for bunkering only.

No. 2 berth is used for the discharge of refined products and bulk chemicals. It is fitted with 4×8-in. chiksans and a range of hoses form 4 to 8 in.

A Pilot is compulsory, and boards at Puerto Cabello. If the vessel is cleared outwards at Borburata, the Pilot may return to the pilot station by road.

Berthing and unberthing in daylight only.

Lagoven Terminal: The buoy mooring is used for the discharge of petroleum products. Max. length 198 m. Max. beam 28 m. Max. draft 34 ft., will be increased to 38 ft. in 1979. Max. Tonnage 40,000 d.w.t. Vessels berth using 5 shackles on the port anchor, and 6 stern lines to 3 mooring buoys.

Terminal Marino Holanda: Consists of 3 buoys situated in a depth of 45 ft. near Guaguaza Lighthouse. Used for loading/discharge of Chemicals.

STEVEDORES: *Straight time:* Monday to Friday: 0700–1100 hrs. and 1300 to 1700 hrs.

Overtime: Monday to Friday: 1800 to 2300 hrs. Normally overtime beyond 2300 hours is not permitted.

Relief Gangs: Obtainable, if there are not too many ships working in the port at a time, for the hours from 1100 to 1300 and 1700 to 1800.

Work on Sunday: Not permitted except for passenger vessels, and considered as such are those carrying more than 60 passengers, and with a medical doctor on board.

Saturday afternoon work: Not permitted. But if a vessel can terminate operation and sail with a maximum of 3 additional hours' work, a special permit can be obtained from Customs and Port Authorities. In such case, the additional working hours are considered straight time work.

FRESH WATER: Water is supplied through pipe-line on the pier, day or night.

For night work, a special gratuity to watermen is customary.

The drinking water in Puerto Cabello is tropical treated, well-filtered and wholesome.

Every vessel of over 600 tons net calling at Puerto Cabello, and other ports in Venezuela, should arrange to take water only at Puerto Cabello in order to avoid double water dues.

OPENING/CLOSING HATCHES: Is not performed by the National Port Services, but instead either the ship's crew or hired assistance labour must be used. Recommended that ship's crew open and close hatches.

REPAIRS: The adjacent Naval Yard, the entrance to which is within the main ports, opposite the North Pier, is equipped for minor repairs both on engine and hull. For emergency purposes, the dry dock could be used. Its capacity is for ships up to 30,000 to 35,000 tons. All repairs on the hull are effected by a special crew transferred from the Naval Yard.

At the dry dock there is 1 crane of 15 tons capacity. Within the Naval Yard there are 2 slipways for ships of 125 ft. max. and 210 ft. length max. respectively.

Venezuelan Navy ships always have priority.

AGENTS: Head Office (Direction and Control). Brokers, Chartering and Tramp Agents, Victor H. Selinger, S.A., PO Box 1632, Caracas, 101 Venezuela. Cables: "Selvic" or "Seltank" Tel. (02) 81.02.71. Telex: 21402, 22859, 21631, 21934. Local Office, PO Box 108, Puerto Cabello. Tel. (042) 2866, (042) 3088. Cables: "Selvic Puertocabello" or "Seltank Puertocabello". Telex: 42431.

PUERTO DE HIERRO: 10.38 N. 62.05 W.

DOCUMENTS:

Last Port Venezuelan Consulate Clearance.
6 Crew Lists.
6 Passenger Lists.
6 Stores Lists.
6 Narcotic Drugs Lists.
2 Health Declarations (forms provided and filled by doctor on arrival).
Smallpox Vaccination Certificates of Crew.
Derat Certificate.

PILOTAGE: Pilot boards at sea buoy 10° 37′ N., 62° 06′ W. If no pilot boat meets vessel on arrival, ship must anchor to wait orders. Send 72, 48 and 24 hour ETAs to cable address "Transterm Guiria". Vessels should anchor in the vicinity of sea buoy. No radio-telephone available.

ANCHORAGE: Vicinity of sea buoy. Good holding ground.

RESTRICTIONS: Vessels may have to wait at anchorage until slack water for docking when tide/current is strong.

MAX. SIZE: Dock, East berth: 30 ft. at low water 33 ft. at high water 690 ft. length, 90 ft. beam. Dock, West berth: 19 ft. at low water, 32 ft. at low water. 600 ft. length, 60 ft. beam. Also see "Berthing".

HEALTH: Doctor boards at berth and grants pratique. Any suspected disease or fever to be reported at that time. Vessels arriving from a Venezuelan port do not require pratique.

RADIO: La Guaira, Venezuela.

TUGS: None available.

BERTHING: Berthing at times limited to slack water period depending on strength of tides. Pilot will advise.

Bauxite Terminal: Max. draft 37 ft. Depth alongside 40 ft. Max. d.w.t. 40,000 tons. Loading rate 3,000 t.p.h.

STEVEDORES: Bulk cargoes: discharging rate 700/800 t.p.h., loading rate 800/1,000 t.p.h. No facilities available for handling general cargo.

MEDICAL: No notice required. Venezuelan Navy Hospital with limited medical assistance.

TANKERS: No oil carriers.

DENSITY: Low water – 1020. High water– 1023.

FRESH WATER: Available in limited quantities at berth. Rate of delivery 30 t.p.h.

FUEL: In an emergency. Diesel fuel medium, specific gravity at 60° F. 0.85, API gravity at 60° F. 35, viscosity SSU at 100° F. 37, viscosity engler at 20° C. 1.40.

DEVELOPMENTS: Possibility of increasing draft to 42 ft. at loading berth, and to 30 ft. at discharging berth.

CUSTOMS ALLOWANCES: 2 cartons of 200 cigarettes each or equivalent in tobacco. Two 0.75 litre bottles.

IDENTIFICATION CARDS: Issued locally by Navy on arrival.

REPAIRS: None. Small company workshop.

CONSULS: None.

AIRPORT: Nearest airport (1 hour voyage on launch) is Guiria with 2 weekly flights to Caracas and the same number to Port of Spain, Trinidad. Next nearest (1 hour launch plus 2 hours car) is Carupano with 4 daily flights to Caracas.

TIME: GMT minus 4 hours. Permanent.

HOLIDAYS: Cargo worked 24 hours a day, 365 days a year.

GENERAL: The whole of Puerto de Hierro is a Venezuelan Navy Supply Base. The dock and cargo installations are operated by Puerto de Hierro, S.A., a subsidiary of Caribbean Steamship Company, S.A. Only bulk cargoes transhipped by Caribbean Steamship are handled.

AUTHORITY: Puerto de Hierro, S.A.

PUERTO LA CRUZ, (Puerto La Cruz Terminal): 10.13 N. 64.38 W. (See Plan Book)

OPERATORS: S. A. Meneven. Postal Address, Apartado 4064, Puerto La Cruz, Venezuela. Radio Address, Meneven, Puerto La Cruz. (Venezuela). Telex: 81147 Meneven.

FLAG: Venezuelan flag must be displayed from the foremast when entering zone as well as in docking operations regardless of the hour. At all other times the Venezuelan flag must be displayed between sunrise and sunset.

LOCATION: Puerto La Cruz located on Pozuelos Bay on the N.E. coast of Venezuela. Its harbour is well protected by numerous islands against sea currents. The hurricane path is several hundred miles to the North and has never affected the flow of navigation in the Puerto La Cruz area.

The lighthouse marking the entrance to Pozuelos Bay is located: Lat. 10° 18′ 18″ N., Long. 64° 41′ 7″ W. Visibility is 20 miles.

DOCUMENTS: Arrival clearance is effected on board vessel shortly after docking by Government Officials and a representative of the Company. The following documents are required:

1. Ship's Register.
2. Dispatch issued by Venezuelan Consul at last port (1 copy).
3. Ballast Manifest (1 copy).
4. Crew List (6 copies).
5. Passenger and Baggage List, if any (5 copies).
6. List of Passengers in Transit, if any (5 copies).
7. List of Personal Effects (4 copies).
8. Store List (5 copies).
9. List of Slop Chests (4 copies).
10. Sailing Permit issued by Marine Authority at last port of call.

*Store List should indicate separately all deck, engine and cabin stores.

PILOTAGE: The use of Government Pilots is compulsory for all vessels entering or leaving territorial waters. The Company will arrange for this service at all times. If it becomes necessary for the Master of the vessel to disregard Pilot's orders in order to ensure safety of the ship a written report from the Master shall be submitted promptly to the Government Port Captain in Spanish. Meneven will assist in translation, when necessary.

The zone for Pilot to board or to anchor awaiting Pilot is delineated by the following 3 lines: South by parallel 10° 15′ N., East by meridian 64° 40′ W., and West by an imaginary line from Punta Puinare on Isla Chimana del Oeste to the North point of Morro de Barcelona.

When ready to dock, a Pilot will be despatched by launch to ship.

MAX. SIZE: No limitation is placed on width of tankers. Ships up to 1,000 ft. in length can be turned around in the inner harbour area. Max. safe draft alongside (berth No. 5) is 55 ft. (Also see "Berthing".)

HEALTH: In theory the Government Port Doctor is to board each incoming vessel and board only outgoing vessels which carry passengers. In practice, however, the doctor boards at his discretion.

Ships cleared between the hours of 1700–0800. Mondays through Fridays and all day Saturday, Sundays and holidays are charged by Immigration Service for the issuance of shore leave passes. There is no charge for this service from 0800–1700 hrs. Mondays through Fridays. Transportation and immigration clearance fees on movement of seamen are billed at cost.

RADIO: Masters are requested to advise Meneven Puerto La Cruz by radio 48 hours in advance of estimated arrival giving vessel's name, date and hour of arrival, bunkers, name of Master, port of departure, draft (arrival), Venezuelan gross tonnage, flag of ship. Vessels may contact the terminal by radio-telephone on 2182 kc/s. and VHF Channel 16. There is standby attention 24 hours a day. The terminal also has the frequencies 2080, 2120, 2638, 2738 and VHF Channel 13.

Ship-to-shore radios are installed on the oil dock and on both tugs. A 350-watt AM transmitter-receiver is monitored 24 hours a day.

TUGS: 2-tug service is compulsory by law in this port. The Company has available a first-class diesel-electric tug of 1,600 h.p. and a contract tug of 2,100 h.p.

Tug assistance is charged as follows for each tug per manoeuvre according to the following deadweight scale – as published in the "Tanker Register" by H. Clarkson of London.

1 – 20,000 d.w.t.	– Bs. 2,450
20,001 – 30,000 d.w.t.	– Bs. 2,870
30,001 – 40,000 d.w.t.	– Bs. 3,300
40,001 – 50,000 d.w.t.	– Bs. 3,750
50,001 d.w.t. upwards	– Bs. 4,200

BERTHING: The loading facilities consist of 6 berths. Products available and safe draft are as follows:

	Berth 1	*2*	*3*	*4*	*5*	*6*
Crudes	×	×	×	×	×	×
Heavy fuel oil					×	×
Refined products			×	×		
LPG		×	×			
Bunker "C" fuel	×	×	×	×	×	
Diesel fuel	×	×	×	×	×	×
Intermediate fuels	×	×	×	×	×	
Fresh water	×	×	×	×	×	×
Max. safe draft (ft.)	38	38	38	38	55	39.5
Max. d.w.t. (thous.)	45	45	45	45	110	55

*El Chaure Terminal – Now Pier No. 6 – is actually out of service for repairs. The Terminal is expected to be back in service by January 1979 as a renewed installation. Also see "El Chaure".

Upon arrival at dock the following rules must be observed:

(*a*) Masters must ensure that mooring lines are properly tended during the discharge of ballast and loading of cargo, and that sufficient personnel is on board at all times to handle same. Discharging or loading will be temporarily suspended upon infringement of this regulation.

(*b*) Masters are requested to remove the blank flanges from their vessel's loading manifold before docking, so as to expedite the connecting of the shore hoses by company personnel. Vessels using berth No. 5 are also requested to have their derrick and gangway ready for use.

Note: Vessels normally dock with starboard side to dock, unless otherwise advised.

(*c*) While docked, discharge of sea water, hot water or steam on dockside of ship is prohibited. Hot water or steam may activate the automatic sprinkler system as well as damage piping located under the dock surface.

(*d*) Rat-guards must be placed on all ropes connected with the shore.

(*e*) Heavy exhaust smoke from vessel's funnel is not permitted. Any infringement of this rule will result in Government fine and/or removal of ship from dock.

(*f*) Meals must be provided in officers' mess-room for Venezuelan National Guard personnel who may be assigned to the vessel during stay in port.

LOADING: After the vessel has been cleared, the Company Dock Supervisor on watch will give the Master of the vessel written instructions as to grade or grades of cargo, loading rates, information on size of hoses and lines, and other information pertinent to the loading of the vessel.

During loading operations, company employees are on watch to administer to the needs of each vessel.

Upon termination of loading cargo, hoses are normally displaced with air at controlled rates prior to disconnecting. If the ship's officers request that the alternate procedure of draining hoses be effected, shore personnel will be happy to comply provided the following steps are observed by ship's officers:

1. Advice be received prior to termination of loading cargo.
2. Ship's receptacles be situated to receive oil drained on board. It should be noted that heavy fines are imposed for spills or overflows which contaminate the bay.

Shortly after completion of loading company personnel will take ship's ullages and, later, deliver cargo and sailing papers to an officer of the vessel.

Ships must vacate berth upon completion of loading and await papers at anchorage if the berth is needed for another vessel. The Dock Supervisor on duty will advise ship's officer of this matter.

BALLAST: Although climatic conditions in Puerto La Cruz are relatively mild, vessels should arrive with sufficient ballast to permit safe handling. Venezuelan regulations strictly prohibit the pumping overboard of dirty ballast in territorial waters. All ballast must be pumped ashore with the exception of vessels especially equipped with clean segregated systems which are reserved for ballast only. Vessels so equipped will be permitted to pump overboard after first being inspected and approved by shore personnel. Heavy fines are imposed for pollution of waters and industrial fishermen are quick to report any infringement. Max. discharge pressure to shore installations is 90 p.s.i. through the 16 in. line which dumps into ballast lakes approximately 300 m. South of dock.

No vessel will be allowed to discharge ballast if last previous cargo was sower crude and/or could result in unpleasantness to area inhabitants.

FRESH WATER: Fresh chlorinated water is available at an average rate of approximately 10 t.p.h. Total volume of water that can be supplied during the normal period alongside averages about 150 tons. As water is not held in special reserve for vessels requirements but supplied from terminal water system, availability may be limited dependent on time of year and other conditions.

FUEL: The terminal is not a general bunker station. Only ships loading petroleum may take bunkers.

Bunker "C", heavy diesel fuel and complete range of intermediate fuels are available in quantity. Delivery rates to the ships are approximately as follows: Bunker "C", 200 t.p.h.; heavy diesel, 150 t.p.h.; intermediate fuels, 150 t.p.h.

Bunkers are delivered concurrent with the cargo and should be taken as soon as clearance is granted.

Meters are installed on all bunker systems and are calibrated in net barrels.

The dock valves on the bunker lines will only be opened and closed upon advice from the ship's personnel.

Lubricants and gasoil are available through the vessel's Agent.

CUSTOMS: Crew members should be warned against taking knives or other lethal weapons ashore, as this is strictly prohibited. All firearms and ammunition must be noted on stores list. They cannot exceed 1 per officer and 18 cartridges per gun. No arms may be carried while ship is in Venezuelan waters or tied up at dock. Contraband of any description will be confiscated. Each man is allowed 1 package of cigarettes on his person and this package must be opened. No liquor is to be taken ashore. It is prohibited to carry liquor from shore to ship without authorisation from captain of vessel. It is further strictly prohibited to consume liquor in dock area.

It is normally forbidden to take photographic cameras ashore. However, upon written request to the National Guard contingent on the oil dock, special permission may be obtained. This is subject to 2 limitations: (1) that the camera is returned to the ship; (2) that no photographs are taken of the petroleum installations.

IDENTITY CARDS: Passes for shore leave are issued by the officials of the "Capitania de Puerto", who board with the Customs authorities upon the vessel's arrival at dock. These passes are valid for the duration of the vessel's stay in port and must be returned before sailing to the guard assigned to the vessel.

In order to comply with Immigration Regulations, crews should be carefully checked before sailing, and any missing seamen reported to the vessel's Agent. Crew members left behind when the vessel sails will be held in custody until deported at the vessel's expense.

CONSULS: The following foreign countries have consular offices in the vicinity of Puerto La Cruz:

Belgium
Brazil
Colombia
Denmark
France
Great Britain
Italy
Norway
Sweden
The Netherlands
Dominican Rep.

Vessel's Agent should be appraised of vessel's consular requirements promptly upon docking.

REPAIRS: Request for repair work by local contractors must be accompanied by a written request from the Master of the vessel.

REPATRIATION: Seamen discharged from hospital for transfer to another port, seamen arriving from another port or those being repatriated are handled by the vessel's Agent, who must comply with all Venezuelan Regulations.

In the case of seamen left ashore for any reason, Masters are requested to furnish a letter accepting responsibility for all expenses incurred, advances if any, and instructions for repatriation. Venezuelan regulations, at all times hold the vessel responsible for a seaman during his stay in the country. Close contact is maintained by radio with ship owners regarding disposition of their seamen.

TIME: GMT minus 4 hours. Permanent.

REGULATIONS:

Excessive Smoke. It is absolutely prohibited to exhaust heavy smoke through a ship's funnel while tied up at the Company's docks. It is also prohibited to blow boiler tubes. Failure to comply with this regulation will result in any or all of the following actions:

1. Vessel's discharge of ballast or loading of crude or products will be immediately shut down.
2. Vessel will be subject to fine from authorities.
3. Vessel may be removed from dock.
4. Owners will be advised of infractions of this regulation.
5. Fines, time lost, and other related expenses will be charged against the vessel.

Pollution. Venezuelan laws are very strict on this subject and local authorities quickly enforce existing statutes. For this reason each Master is handed a circular that emphasises the necessity of complying with federal and local laws and customs.

The spilling or discharge of dirty ballast, crude oil or petroleum products into coastal waters is defined as pollution, as is also the throwing overboard of garbage, trash or other unwanted objects while the vessel is at anchor or dockside. Prior to the start of loading operations all discharge valves, bilges and scuppers must be closed and strict vigilance exercised during deballasting and loading operations.

When a spill does occur, the Master, Government officials and a company representative evaluate the quantity and submit a report to the Government Petroleum Inspector. This report becomes the basis for a federal fine that is practically incontestable. An additional expense occurs when local authorities require assistance in cleaning beaches and shorelines after a major spill and can pinpoint the responsible vessel or source.

TONNAGE CERTIFICATE: Due to reciprocal agreements between Venezuela and the following countries, ships flying the flag of any of the below-named countries exempted from Arqueo compliance and payment of fees: Denmark, England, France, Germany, Netherlands, Ireland, Norway, Portugal, Sweden, United States.

Ships bearing the flag of any other nation shall require a Venezuelan Arqueo Certificate. The cost of measuring is contingent on the size and tonnage of vessel. The certificate is usually issued after the ship sails from port. It is then sent to the marine department of the Owners of the vessel by airmail.

GENERAL:

Charts. No charts or sailing documents are available in the terminal. Same should be forwarded by airmail to the vessel's Agent for delivery to the ship.

All ship requirements such as chandlery supplies, mail, cash advances, medical, dental, consular requirements, repair work, laundry service, bonded stores, transportation etc. should be obtained through the vessel's Agent.

PETROLEUM INSPECTORS: E. W. Saybolt Company, Chas. Martin & Company, Aivepet and Redwood have resident representatives in Puerto La Cruz for independent petroleum or product inspections. Their offices are located in the dock office building located between berths Nos. 1 and 2 (second floor).

TELEPHONES: There is a telephone booth on each dock. The supervisor on duty may be contacted by calling number 308 or 906.

SHIPMASTER'S REPORT: February 1979.

Documents:

3 Copies of list of passengers or nil passengers.

3 copies of a letter by Master stating that vessel was diverted after sailing from previous port and explaining why clearance destination is wrong.

3 copies of cable ordering diversion.

Anchorages: Good holding ground in N.W. part of anchorage area, thick mud.

Restrictions: Maximum height of manifold about 18.95 m. so necessary for vessels of 140,000 d.w.t. to load some cargo before completion of ballast.

Max. Size: If draft less than 30 ft. on arrival vessel can approach berth direct from West, and use 2 tugs. If more than 30 ft. draft then vessel must use channel to the North of berth and 3 or 4 tugs. This for vessels of 140,000 d.w.t.

VHF: Tankers call "Meneven" on Channel 16, then change to Channel 12 or 13. Also call Agents on Channel 16.

Berthing: Back springs to bollards on jetty. Breasts and heads and stern lines to hooks on dolphins. These hooks are secured to bollards by wire of circumference 19 cm. or diameter 6 cm.

Consuls: No U.S. Consul available and Agents will give Master letter to this effect for U.S. Immigration.

General: Ballast, if clean, may be pumped overside. If dirty, advise Meneven prior to arrival of quantities to be pumped ashore. They will also accept slops if not sour crude or smelling too badly.

Notice to Shipmasters:

We wish to advise the Masters of all vessels calling at this port that it is strictly prohibited to take photographs.

It is likewise contrary to regulations to carry ashore a camera. Same is liable to be confiscated by the Government Authorities.

Signed S. A. Meneven.

AGENCY:

All incoming ships to lift cargoes at this Terminal must have a local Agent to render all services required for a prompt and efficient tanker turnaround and to cancel all ships disbursements during the port stay.

S.A. Meneven as operator of the Terminal charges a fixed fee of Bs. 2,000 for General Services such as supervising the docking and undocking manoeuvres, hose connections, loading and documents required by the cargo buyers or consignee. Handling of Telexes, documents and airpostage will be charged at cost.

Offices of Meneven loading and marine personnel are located on the first floor of the building between berths Nos. 1 and 2. Any matter concerning loading, bunkering, is handled through this office, which is open 24 hours of every day. On the ground floor of this same building is located the Documentation Section.

PUNTA CARDON: 11.36 N. 70.15 W.

PORT LIMITS: The area enclosed by the parallels of 11° 38′ 00″ N. and 11° 36′ 38″ N. and the meridian of 70° 14′ 25″ W.

OPERATORS: Maraven, S.A.

FLAG: It is compulsory to display a Venezuelan flag at the foremast starboard yardarm during daylight hours for ships anchored or berthed in Venezuelan waters. The ships Services will provide a Venezuelan flag at any time for ship's account.

LOCATION: The port of Punta Cardon is located on the Gulf of Venezuela, on S.W. coast of Paraguana a Peninsula, Venezuela. Punta Cardon is an open sea port with practically no swell, due to the Easterly winds prevailing almost all year from the shore side.

ESSENTIAL REQUIREMENTS:

1. Incoming vessels must send ETA at least 3 days before arrival at Punta Cardon.

2. If a ship, originally cleared for another port (including any other Venezuelan port) is diverted at sea to Punta Cardon, certain information must be radioed prior to arrival in order to avoid heavy fine(s) and/or delays.

3. No dirty ballast may be pumped overside in port in Venezuelan coastal waters. Ballast disposal facilities are available at Punta Cardon Terminal.

4. The use of Venezuelan Government Pilots is compulsory for berthing and unberthing.

5. In addition to other clearance documents, 5 copies of an itemised list of articles in the ship's slop chest must be presented to the authorities on arrival.

6. The emergency fire signal is 5 long blasts on the ship's whistle or siren. No other signal is to be given in cases of emergency.

7. Rat-guards must be placed on all mooring lines.

DOCUMENTS: Clearance (inward pratique). Inward clearance is effected on board by Government Port and Customs Officials and a representative of the Oil Movements Department immediately after berthing. The following documents must be ready on arrival:

(1) In ballast:

*(a) Clearance from Last Port (1 copy).
*(b) Ballast Manifest from Last Port (1 copy).
(c) Crew List (7 copies).
(d) Steward's Store List (all foodstuff, liquors, tobacco, etc.), to be declared on a separate and independent sheet (5 copies, see note (2)).
(e) Deck and Engine Stores and Spare Parts List (paints, varnishes, chains, ropes, etc.), to be declared on a separate and independent sheet (5 copies, see note (2)).
(f) Medicine Chest Lists (including narcotics accurately itemised) (5 copies).
(g) Slop Chest Lists (5 copies).
(h) Personal Effects Lists (4 copies).
(i) Sailing Permit (issued by Maritime Authority at Last Port of call) (1 copy).
(j) Passenger and Baggage Lists (if any) (2 copies).
(k) List of Passengers in transit (if any) (4 copies).

* Documents marked with asterisk are to be visaed by Venezuelan Consular Authorities at the last port of call.

In the absence of a Venezuelan Consul the documents must be visaed by the Consul of a friendly nation, or by the Local Chamber of Commerce, or by 2 local reputable businessmen, whose signatures shall be notarised.

In the absence of a Venezuelan Consul the following notation should be written in Spanish on each document signed by the alternates designated above.

"Por no existir en la localidad Agente Consular Venezolano y a peticion de los embarcadores, certifico el presente documento".
(Signature)

(2) Both the Steward's Store List, the Deck and Engine Stores and Spare Parts List may be prepared on board prior to the vessel's arrival. However, if the vessel is dispatched from the colonial Antilles or Guianas, these lists as well as the personal Effects List must be visaed by the Venezuelan Consul at the port of departure. The Steward's Stores List must be comprehensive and accurate, especially with regard to cigarettes and liquor. All new clothing, gift, souvenirs, etc. are to be clearly marked. All personal effects of the crew are to be collected and placed in the Bonded Stores Locker, ready for sealing by the Customs Authorities on arrival.

Although vessels proceed directly to Punta Cardon, clearance documents should be made out showing the port as "Las Piedras, Paraguana (Punta Cardon)". Failure to comply with this requirement may result in fines up to a max. of U.S. $600.00.

(3) Clearance documents out-bound: Outward clearance and cargo documents are delivered on board by the Ships Services Representative.

In the event that the berth is required by another vessel, a vessel having completed loading may be required to vacate the berth promptly and proceed to anchorage to await cargo documents and clearance.

PILOTAGE: Pilots are employees of Venezuelan Government and pilotage is compulsory for vessels entering or leaving harbour. The Ships Services Office will arrange for this service at any time. If it becomes necessary for Master of the vessel to disregard Pilot's orders in order to ensure safety to the ship, the Master must promptly submit a written report to the Harbour Master on the matter, via the Ships Services Representative, stating reason for this action.

Pilots sustaining injuries: It is compulsory to submit a full report in cases where a Pilot is injured while performing duties on board vessels.

ANCHORAGE: The anchorage at Cardon roads within a radius of 2 miles from end of jetties has depths varying from 54 to 100 ft. (LWS) and a bottom consisting of mud with some patches of small stones, sand and shells. There are no known obstructions from West to N.W. of the Piers and there is ample water for a clear approach when coming from West and N.W., but the anchorage is limited on the South by a sandspit projecting 1 mile S.W. off Punta Cardon Cape. A beacon is located on this Sandspit in position: Lat. 11° 36′ 03.4″ N., Long. 70° 14′ 15.6″ W. Fl.R. ev. 1 sec. 17 ft. 5 miles (U).

APPROACHES: Restricted Fishing Area. Masters when approaching coast should keep a particularly sharp lookout for fishing boats, nets and small craft.

Mechanically propelled vessels drawing more than 5 ft. are prohibited from navigating in the restricted fishing area that extends off Paraguana Peninsular from Punta Macolla, Lat. 12° 5′ 32″ N., Long. 7° 12′ 55″ W. to Punta Estanques (Los Taques), Lat. 11° 48′ 45″ N., Long. 70° 16′ 45″ W., and a line connecting the position indicated below:

(*a*) Lat. 12° 07′ 40″ N., Long. 70° 14′ 25″ W.
(*b*) Lat. 12° 03′ 15″ N., Long. 70° 19′ 23″ W.
(*c*) Lat. 11° 49′ 25″ N., Long. 70° 21′ 50″ W.

Leading Lines

	Position			*Height in Metres*
Jetty	*Latitude N.*	*Longitude W.*	*Colour*	*(LWS)*
I	11° 37′ 19.2″	70° 13′ 54.6″	Green	4.70
	11° 37′ 23.1″	70° 13′ 47.6″	Green	14.20
II	11° 37′ 32.0″	70° 14′ 02.0″	Red	4.83
	11° 37′ 35.9″	70° 13′ 55.1″	Red	14.30
III	11° 37′ 08.1″	70° 13′ 53.5″	White	3.06
	11° 37′ 09.1″	70° 13′ 50.6″	White	14.94
IV	11° 37′ 41.9″	70° 14′ 12.0″	Blue	5.10
	11° 37′ 42.4″	70° 14′ 09.4″	Blue	21.54

Land Marks

2 radio towers, very conspicuous, with micro-wave antenna at the middle painted in aluminium white, in position, Lat. 11° 38′ 03″ N.,lbong. 70° 13′ 56.2″ W. Height 205 ft. (62.5 m.).

Navigation aids

A light is located on the outer radio tower.

Position: Lat. 11° 38′ 03″ N., Long. 70° 13′ 56.2″ W.

Characteristics: Fl. White and Red, ev. 10 sec. Height 205 ft. (62.5 m.) 21 miles (U).

Sectors: Red 340° – 009°, White 009° – 009°, Eclipse 202° – 340°. (All bearings are true from seaward).

Beacon: Located on sandspit of Punta Cardon.

Position: Lat. 11° 36′ 03.4″ N., Long. 70° 14′ 15.6″ W.

Characteristics: Fl. Red. ev. 1 sec. Height 17 ft. (5.2 m.) 5 miles (U).

2 large chimneys are very conspicuous in the Refinery Area. The North chimney is situated Lat. 11° 37′ 54.6″ N., Long. 70° 13′ 10.8″ W. Height above MLWS 399.6 ft. (121.8 m). The South chimney is situated Lat. 11° 37′ 52.9″ N., Long. 70° 13′ 09.8″ W. Height above MLWS 396.3 ft. (120.8 m.). For daylight distinguishing marks, both are painted with broad red and white bands and at night both have a string of all round fixed red lights at the top and the same at the middle height.

A steel tower. A commercial radio tower is situated outside the Refinery Area in position: Lat. 11° 36′ 29″ N., Long. 70° 13′ 42″ W. Height above MLWS 164.7 ft. (50.2 m.). This is not very visible during the day, but at night it has at the top, flashing every second, an all round Red Light, visible at 12 miles.

MAX. SIZE:

	Jetty/Berth		*Depth LWS*	*Draft*	*Length in feet*	*Displac. in tons*
No. 1	North Outer	(3)	42′ 00″	39′ 06″	710	25,000
	South Outer	(4)	42′ 06″	40′ 00″	710	25,000
	North Inner	(1)	31′ 06″	30′ 00″	575	25,000
	South Inner	(2)	32′ 06″	31′ 00″	575	25,000
No. 2	North Outer	(3)	43′ 00″	40′ 06″	710	25,000
	South Outer	(4)	41′ 06″	39′ 00″	710	25,000
	North Inner	(1)	21′ 00″	19′ 06″	424	25,000
	South Inner	(2)	23′ 00″	21′ 06″	424	25,000
No. 3	North Outer	(3)	47′ 00″	44′ 06″	900	62,000
	South Outer	(4)	48′ 00″	45′ 06″	900	62,000
No. 4	North Outer	(3)	47′ 06″	45′ 00″	900	54,000
	South Outer	(4)	47′ 06″	45′ 00″	900	54,000

TUGS: 2 tugs of 1,200 h.p. and 1,600 h.p. respectively are available, and their assistance is compulsory for berthing. Number, disposition and manoeuvres of tugboats are directed by the Pilot. The following tug signals in practice in this port are listed below for Master's guidance:

Short blasts are used to give orders to the tug situated ahead.

Short blasts are used to give orders to the tug situated ahead.

Long blasts are used to give orders to the tug situated aft.

1 blast means *push* tug engine, ahead (if it is stopped); *stop* tug engine, stop (if it is moving).

2 blasts, *pull* tug engine, astern.

1 long, 1 short, 1 long and 1 short whistle, "Calling tugs"

2 long and 2 short whistles, "Tugs Dismissed".

RADIO: Arrival messages (ETA). Master of vessels bound for or diverted to Cardon are requested to radio the following information to "Maraven. Caracas" via "La Guaira Radio", call sign YVG, 72 hours in advance of estimated arrival, or as soon as possible.

(*a*) Name of vessel
(*b*) Flag
(*c*) ETA
(*d*) Last Port.
(*e*) Master's name
(*f*) Number of crew and passengers
(*g*) Port for which the vessel is cleared
(*h*) Quantity of clean ballast on board
(*i*) All requirements

This information is of the utmost importance to the Harbour Authorities in facilitating the entry of vessels in general, and in case of diversion.

VHF Radio Telephony. The radio and communication centre is located in the Oil Movements Office Building situated at the foot of No. 2 Pier at a height of 50 ft. above sea level. The roof of the building is painted black and the word "Marine" painted across in large white letters.

There is a RT set operating 24 hours a day on the following frequencies, and manned by English speaking operators:

156.6 mc/sec.FM	VHF	(Channel 12)	Range limit	25	miles
156.8 mc/sec.FM	VHF	(Channel 16)	,, ,,	25	,,
2120 kc/sec. AM	HF		,, ,,	150	,,
2182 kc/sec. AM	HF	(Channel 1)	,, ,,	150	,,
7620 kc/sec. (SSB)	HF	(Channel 3)	,, ,,	300	,,

Call sign: "Marine Cardon"

Vessels not equipped with radio telephone may call the installation by signal lamp (Aldis lamp) whereupon the service launch will be sent out to vessel to pick up any message it may have.

BERTHING: Without exception ships always moor head-in on all berths. It is considered prudent to have the outboard anchor hove out prior to approaching piers to facilitate speedy release while docking if necessary. Vessels are to be moored to satisfaction of the Port Services Superintendent or his deputy; mooring lines must be tended regularly and kept hove taut to prevent surging and possible damage to ships, docks or hoses. When adjusting mooring lines, the assistance of harbour tugs should be requested before slackening off any mooring line.

BALLAST: It is suggested that vessels nominated to load at this installation arrive with the minimum of ballast on board, necessary for the safe handling of the vessel under normal conditions. In this connection experience has shown that, under normal weather conditions, vessels can be safely berthed and unberthed with a quantity of ballast of approximately 20% of their respective Summer deadweights. Clean ballast can be pumped into the sea, but Masters are reminded that pollution of the sea incurs heavy fines. Dirty ballast can be received ashore. Maximum discharge pressure to shore installation is 150 p.s.i. in the 20 in. ballast line of Jetty No. 2; Jetties Nos. 4 and 1 have a 24 in. ballast line, and Jetty No. 3 has a 16 in. line. Masters are requested to endeavour to arrive at this port with 20% SDW ballast.

MEDICAL: Facilities are available for medical and dental treatment, vaccination and hospitalisation in a private clinic.

The doctor's working hours for out-patient treatment are as follows: Monday to Friday, 0900 to 1100 hrs., 1400 to 1700 hrs. Saturdays, Sundays and holidays, only urgent cases will be attended to.

Emergency cases will be attended to at all times.

Masters requiring medical or dental service or vaccination for their crew members should call Ships Services by dialling 2105. Our representative will make the necessary arrangements with the clinic and arrange for transportation to pick up the crew members on the pier and to take them to the clinic and back. Any crew member who is sent ashore for medical or dental treatment, and who does not speak English or Spanish, must be accompanied by a crew member who speaks one of these languages.

Doctors do not attend patients on board. In serious cases where the patient is unable to walk an ambulance will be provided to take him to the hospital.

FRESH WATER: Fresh water is available at all berths. Loading rate is 30 t.p.h.

CUSTOMS: Venezuelan National Guards are stationed at the piers to ensure that vessels in port comply with regulations.

1. *Smuggling.* Strict compliance with the Customs laws of the country is enforced by the Authorities and Masters are strongly advised to caution crew members against attempting to smuggle ashore cigarettes in carton lots, cigars, tobacco, souvenirs, gifts (particularly items of women's apparel) or other articles. A maximum of twenty cigarettes per person for personal use is allowed to be carried but a greater quantity will result in the imprisonment of the offender with possible heavy fines and delay to the vessel.

2. *Bar.* On Customs Authorities instructions vessels maintaining a "Bar Service" on board for the use of officers, crew, passengers and visitors, must keep the bar closed during the vessel's stay in port.

3. *Firearms.* Firearms on board any merchant vessel calling at Venezuelan ports must not exceed one per officer, nor can the ammunition exceed 18 cartridges per officer. All firearms and ammunition must be declared on stores list. Officers must not carry firearms while ship is in Venezuelan waters. Said arms should be collected together with the ammunition and held in the Master's safe custody. Crew members should be warned against taking knives or other weapons ashore as these will be confiscated and the bearer fined.

CONSULS: Brazil, Great Britain, Italy, the Netherlands and Norway have Consular representatives in this area.

TIME: Local time is GMT minus 4 hours.

CERTIFICATES: All ships arriving in Venezuelan ports for the first time must be measured by the Maritime Authorities for issuance of a Venezuelan Tonnage Certificate, known as "Certificado de Arqueo". This document gives the measurements and weight of the vessel in accordance with existing laws. The cost of measuring and issuing of the Certificate is contingent on size and tonnage of vessel.

It is usual practice to take ashore the ship's "General Arrangement" and "Capacity" plans, which are used as a basis for calculations. These plans and the Venezuelan Tonnage Certificate are later forwarded to ship's Owners.

Vessels registered in following countries are exempt from above regulations, due to existing reciprocal agreement with Venezuela:

U.S.A., Great Britain, Denmark, France, Germany, Netherlands, Ireland, Sweden, Norway, Portugal.

The Venezuelan Tonnage Certificate is used in calculating Venezuelan Government Port charges, such as Port Captain Habilitation for entry and despatch of vessels and Pilotage Dues, for all vessels except those registered in the countries mentioned above, in which case the Lloyd's Registered Tonnage is used.

HOLIDAYS: By order of the local Port Authorities it is requested that all ships in port be fully dressed on the following national holidays: January 1st, April 19th, July 5th, July 24th, October 12th, December 25th.

REPAIRS: Shore facilities are available for emergency repairs of a minor nature. The nearest dry docks are located at Puerto Cabello and Curacao, N.A. Request for repairs should be mentioned in the ship's ETA message.

SHORE LEAVE: Shore leave is permitted and Harbour Master's representative who boards vessel on arrival issues the required number of shore passes. These passes must be shown when proceeding ashore to the Government and Company Guards at the gangway and refinery gates. They are to be collected by Master prior to sailing and handed to Pilot unberthing the vessel. Masters are reminded that in accordance with the instructions of local police, crew members be properly dressed before leaving the vessel, i.e. long trousers and shirts.

Masters are requested to have shore leave expire at least 2 hours before expected departure. Men then found missing should be reported to the Ships Services Office, tel. 2105, who will endeavour to locate them. An officer must accompany shore personnel in order to identify the missing crew member.

Vessels are not permitted to sail until all crew members are on board, unless said crew members are hospitalised or previously signed off by the Master through the Ships Services representative. If any crew member is missing at sailing time and cannot be found, his passport and other personal documents must be handed to the Ships Service representative, as well as written instructions as to his repatriation, when found. All costs and expenses of a crew member so left behind will be for ship's account.

GENERAL:

1. *Animals:* The importation and transit of all birds belonging to the genus parrot or parakeet is prohibited. For other birds a valid health certificate is required. For so-called "small animals" e.g. dogs, cats, monkeys, rabbits, etc. a valid health certificate and a valid rabies vaccination certificate are required.

2. *Bonded Stores:* Stores in bond are not obtainable in Punta Cardon. The nearest port with bonded stores facilities is Curacao.

3. *Board of Trade Gangway;* A safe gangway must be provided by the vessel and should be rigged as soon as possible after mooring to allow the Port Authorities to board, and should not be taken in until Pilot has boarded to unmoor vessel. The use of rung ladders, pilot ladders, etc. is contrary to Port Regulations and Port Authorities will not board except by means of a safe gangway or accommodation ladder.

4. *Damage during Manoeuvres;* When a vessel or the pier sustains damage during manoeuvres with an official Pilot on board, it is the responsibility of the Master to submit to the Ships Services representatives, immediately after the accident, a report in quintuplicate, for presentation to the Harbour Master. Such reports should give full details of the accident and of all engine movements as ordered by the Pilot, as well as a sketch in triplicate of the ship's manoeuvring position at the time. These will be translated by the Agents into Spanish and forwarded to the Harbour Master.

5. *Cash Advance to Masters:* Cash advances to Masters are made only in Venezuelan currency, which is the Bolivar. Cash requirements should be included in the vessel's ETA message. Foreign currencies are accepted in the United Seamen's Service Club.

6. *Rat-guards:* By order of the Port Authorities rat-guards must be fitted to all mooring lines. Non compliance entails a fine of 200 bolivares for each unguarded line.

7. *Kerosene, Motor Gasoline, Gas-Oil, Solvents:* Supplies for ship's purposes are available in drums. The return of empty drums ashore is prohibited by Customs regulations. Therefore the cost of each drum will be billed to the vessel in the Port Disbursement Account.

8. *Lubricants, Oils and Greases:* Supplies of products are available. Vessels arriving at Punta Cardon on Saturday or Sunday or on a holiday should give ample notice of their requirements by cable in order that the necessary labour arrangements for delivery can be made. This procedure also applies to the delivery of white oils mentioned under 7 above, when required outside working days.

9. *Laundry Service:* Laundry service is available throughout each working day. Such service should be requested in the vessel's ETA message.

10. *Wireless Transmitters in Port:* It is strictly prohibited to use vessel's wireless transmitters in the Port of Cardon. Non-compliance with this regulation may result in a fine being imposed on the vessel by the authorities.

11. *Mail:* On vessels' arrival, blank Mail List Forms will be handed to the Master to be completed in sextuplicate and duly signed by him, when sending ship's and crew mail ashore for posting. Ship's mail received after ship has sailed, or for vessels on which no advice has been received, will be held for 15 days and then returned by airmail to the owners or operators or senders, at ship's expense unless specific instructions have been received beforehand.

12. *Marine Surveyors:* Both the Lloyd's Agents at Maracaibo and Norske Veritas at Caracas have a representative in Punta Cardon who acts on their behalf when a surveyor is requested. However, in the case of continuous or classification surveys, advance notice of 4 days should be given in order to arrange for an appointed surveyor to come from Caracas. There is also a representative of the American Bureau of Shipping in this area (Caracas).

13. *Miramar Club:* Masters, chief engineers and their wives can visit the Miramar Club. For this purpose entrance passes should be requested from the Ships Services Office, tel. 2105.

14. *Manaure Bathing Beach:* The above mentioned bathing beach is open to all ship's staff and crew members.

15. *Norwegian Government Seamen Service:* A Norwegian Vice Consul and Welfare Officer is stationed at Punta Cardon, and provides the usual services to seamen of this nationality. His telephone number is 4359.

16. *Navigation Charts:* Navigation charts are not available at this port.

17. *Passengers;* Movement of passengers over Cardon Piers is subject to restriction under terms of agreement with the government. Passengers will not be permitted to disembark unless in possession of the required Venezuelan visa and travel documents. If passengers are carried, Master should so advise in his radio ETA so that arrangements can be made for Immigration Authorities to visit vessel on arrival and thus facilitate clearance.

18. *Petroleum Inspection:* Charles Martin & Co., and E. W. Saybolt, petroleum inspectors, are available in this area. Contact can be made through the Loading Supervisor (tel. 2821).

19. *Personnel – Seamen Left Ashore:* In the case of seamen left ashore for hospitalisation, repatriation, desertion or other reasons, all documents and personal effects are to be handed to the Oil Movement Department's representative before sailing. A letter is required from the Master advising the maximum advances, if any, to be made to the seaman, and instructions concerning his repatriation. All expenses incurred by seamen left ashore, including cost of repatriation, are for ship's account. It is important that Masters bear in mind that the Venezuelan law will at all times hold the vessel, her Master, or Owner responsible for any seaman left behind in Venezuela.

20. *Photographing:* The taking of photographs within the boundary fence of the Cardon Refinery is prohibited. Taking cameras ashore is likewise prohibited.

21. *Provision and Stores;* Provisions and stores are available. Requisitions should be conducted through the Ships Services Office. Telephone number 2105 or the Ships Services representative when he calls on board with the authorities on arrival. Ships chandlers are not permitted to visit ships, unless specifically instructed to do so by the Agents.

22. *Radar and Radio Repairs:* Repair and maintenance services for radar, radio, gyro compass, radio direction finder, echo sounder, etc. are available. The repair man should be contacted through the Ships Services Office, telephone number 2105.

23. *Safety of Personnel:* It will be appreciated that persons intoxicated by alcoholic drinks can create risks of accidents; therefore we ask the Master's co-operation to ensure that these persons do not enter the refinery gates and/or board their vessel unless accompanied by sober members of their crew. In this connection we will advise the Master or one of his officers, so that measures can be taken to ensure the safety of the forementioned person(s) e.g. by sending one or more of the crew to the gate to accompany him (or them) to the ship.

24. *Visitors:* Visits to ships are prohibited except from those company employees, petroleum inspectors, etc., whose duties require their presence on board.

25. *Walport Film Exchange:* Subscribers to the Walport service may exchange films at the U.S. Seamen's Club situated at the foot of No. 2 Pier, from 0730 to 2200 hrs. every day, by telephoning 2803.

26. *Staff and Crew Changes:* No staff and/or crew should be engaged or discharged without consulting Ships Services (telephone 2105). In case of discharge, identification documents must be handed to the Ships Services representative or the Norwegian Consular Officer in the case of Norwegian vessels.

27. *Tank Cleaning and Mopping:* Several contractors in the area provide labour for tank cleaning and mopping. Masters in need of this service should submit their requirements to the Ships Services Office (telephone 2105), who will contact and request a contractor to go on board to discuss details and estimate costs of work to be effected. It must be pointed out that the Master of the vessel is solely responsible for the proper fitness of the ship's tanks for loading his next cargo, and will therefore be held liable for any contamination of the cargo after loading, due to inadequate tank cleaning. Therefore it is up to him to decide the degree of tank cleaning necessary. He may, of course, seek advice from the installation representative in this respect, whenever there is any doubt.

28. *Turnaround:* To promote the economical operation of their vessel, Masters are requested to co-operate with installation representatives in minimising their in-port time. Any delays which are considered unnecessary or extensive should be reported to the loading Supervisor (tel. 2133) so that corrective measures can be taken.

29. *U.S.S. Club:* All seamen are welcome to the club operated by United Seamen's Service which is located at the shore end of Pier No. 2. Shore passes are required to reach this Club. Beer, soft drinks, ice-cream, candies and various souvenirs and presents can be purchased at reasonable prices. Free cinema shows are usually held twice weekly. A letter-posting service is available as well as

recreational facilities, e.g. billiards, table tennis, darts, etc. A barber shop operates during daytime.

TELEPHONES:

Communications Office (General and Port Information, 24 hours service), 2604. Ships Service Office (All services to ships: mail, doctor, taxi, papers, etc., 24 hours service), 2105. Agents Office (Weekdays) (07.00 to 12.00 – 13.00 to 16.00 hrs.), 2125. Loading Supervisor (Re cargo and bunkers), day, 07.00 to 16.00 hrs., 2821/2133; at night, after 16.00 hrs., 2133. U.S.S. Seamen's Club, 2803.

AUTHORITY: Maraven, S.A.

NOTES

Please also advise Shipping Guides Ltd.

Vietnam, Socialist Republic of

DANANG: (Tourane): 16.04 N. 108.13 E.

(See Plan Book)

SHIPMASTER'S REPORT: 1976.

DOCUMENTS: On arrival usually dealt with immediately by the: Immigration Service, Police Service, Customs Service, Agency and Health Service.

Ships Documents: Certificate of Registry, Radio Certificate, Load line Certificate, Safety Equipment Certificate, Port Clearance from last port.

Cargo-Documents: Bill of Lading (8 copies), Cargo Manifest (8 copies), Stowage Plan (5 copies), In Transit Cargo Manifest (if any).

Immigration: Crew List (7 copies), Store List (2 copies), Crew's Effect Declaration (2 copies), Passports of the Crew.

Health: Vaccination List (2 copies), Provision List (2 copies), International Vacc. Certificates.

All documents to be ready on arrival. Cameras and binoculars to be collected and placed in a locker, to be sealed. Bonded stores not sealed.

PILOTAGE: Pilot station at a position 16° 10′ N. 108° 11′ E. Pilot boards from a tugboat and moves the ship to a position about one mile West of Phare de l'observatoire. Pilot boarding during daytime only. Ships arriving at night should anchor in a position close to the pilot station. Pilot will board the ship at 0600 hrs in the morning. ETA should be given 48 hours and 24 hours prior to arrival at the pilot station.

RESTRICTIONS: There are no restrictions for entering the bay.

HEALTH: A 24 hours cable should be sent to the Agent, stating that all crew are fit and healthy. If any sickness on board cable 48 hours in advance.

RADIO:

Callsign	*Frequency*	*Working hours GMT*
XVT	500 kc/s.	0000 — 1200 hrs.
XVT 2	417.5 kc/s.	0000 — 1200 hrs.
XVT 2	8,570 kc/s.	0130 — 0145 hrs.
		0830 — 0845 hrs.
		1200 — 1315 hrs.

VHF: There is no VHF station.

RADAR: There is no radar post.

TUGS: There are three tugboats available, one of 1,200 h.p., two of 800 h.p. each. Tug's lines are used if necessary.

BERTHING: There is one fingerpier of 250 m. and another under construction. The latter to be ready towards the end of 1976. A tanker berth is situated in position 16° 04′ N. 108° 15′ E. called My Khe. Tankers proceed to this position, after clearance, with pilot rounding by the peninsula. (See Plan). At the cargo pier all discharging is done by ship's gear.

CRANES: There are no cranes available. There is one heavy lift Floating Crane of 100 tons capacity.

BULK HANDLING FACILITIES: Bulk cargoes are sometimes handled at the port (i.e. maize) but there are no special facilities.

BRIDGES: No bridges.

STEVEDORES: Ordered by the Agent. No ETA necessary. Working hours 0000 — 0400 hrs., 0800 — 2400 hrs. Approx. discharging rate general cargo 400 tons/gang.

MEDICAL: Six hours notice required for medical assistance. There is a hospital in town. Inoculations required for cholera, smallpox and yellow fever.

TANKERS: Two submarine hoses of 8 in., all kinds of white spirits discharged through both lines. Maximum back pressure 8 kg. at ship's manifold. Average discharging rate 200 t.p.h. per line.

DENSITY: Cargo pier brackish depending on the season. At the tanker berth salt.

FRESH WATER: Available by barge, rate of delivery 50 t.p.h.

REPAIRS: Repairs taking longer than 2 hours are not permitted unless permission is granted by the Port Master. Small repair facilities can be carried out ashore. There are no drydocks at this port.

DECK WATCHMEN: Cargo ships alongside the pier are provided with a gangway watch. Tankers discharging at My Khe will get two security guards on board during the stay in port.

HATCHES: Old type hatches opened and closed by shore labour. Special patent hatches by crew.

CUSTOMS ALLOWANCE: The bonded stores are not sealed. There are no restrictions for quantity of spirits, cigarettes beer etc. It is strictly prohibited to supply any bonded stores to shore personnel.

CARGO GEAR: There is one floating heavy lift crane of 100 tons.

REPATRIATION: Possible, but takes some time and can be very difficult. Haiphong is a better place for crew changes.

AIRPORT: There is an airport about 7 km. from the town. Air services to Ho Chi Min City and Haiphong, local flights only, twice a week.

TIME: GMT plus 7 hours (no Summertime) is kept along the whole coast.

HOLIDAYS: There are no special holidays.

POLICE/AMBULANCE/FIRE: Via local Agent, telephone number 21161.

SERVICES: There are laundry facilities (2 days ashore) with a 24 hours service. Shipschandler available at all times. Good fresh vegetables and fruits, depending on the season. Also good sea food.

SHORE LEAVE: Permitted via local Agent with 6 hours notice. Persons with invalid passport are not allowed to go ashore.

REGULATIONS: It is strictly prohibited to throw any garbage into the bay, heavy fines. Garbage collected by barge.

DELAYS: Remittance has to be granted by owners or charterers before sailing. Without a sufficient remittance the vessel does not receive a clearance.

Alongside the pier berthing and unberthing only between sunrise and 1400 hrs. due to strong winds in the afternoon. At any other time when strong winds are experienced berthing and unberthing not allowed. The fore mentioned also for the tanker berth at My Khe, here berthing is normally carried out during the morning hours, when there are weak winds. During a strong monsoon it is sometimes necessary to stop discharging operations and unberth the ship.

GENERAL: Ships calling for the first time at Danang port should give their ETA and call sign, nationality, all other necessary particulars so that the ship can be identified by the Navy. Ships, chartered by the Vietnamese Government should state this also and whether time or voyage charter. Ships carrying general cargo should also give all particulars about the stowage of the cargo, whether any deck cargo, heavy lifts etc.

AGENTS: Ocean Shipping Agency, 1a Quang Trung, Danang. Cable: OSA Danang, telephone 21161.

HAIPHONG: 20.52 N. 106.41 E.

SHIPMASTER'S REPORT: 1976.

DOCUMENTS:

8 Crew Lists.
2 Ships Stores Manifests.
2 Crew Personal Effects Declaration (especially: cameras, binoculars, and Foreign Currency).
2 Vaccination Lists: smallpox and cholera. All International Vaccination Certificates. All Passports (are taken in custody by Security Officials).

Special Documents: Special forms which are handed to vessel on arrival.

Health Dept:
1 Declaration of Health on arrival.
1 List of Provision Store (incl. vegetables, fruits, fish, shellfish, meats etc. and where taken).
1 Report of water taken on board: (Drinking — or Ballast water, tons, ports where taken) — tank now being used to supply drinking water.

State Security Dept.:
4 Copy List of Articles forbidden to be used in port: ie. radio transmitter/receiver — Numbers and power; radar; VHF; radio direction finder; echo sounder; sextant, signal gun, signal rockets, flare signals, arms, ammunitions, cameras, binoculars, tape recorders, band recorders.

Note: The radio transmitter, VHF, radar, binoculars, cameras are sealed.

2 Copies: Declaration of Arrival.

Note: Cameras, binoculars of the crew have to be collected and placed in a locker which is sealed. Bond is *not* sealed, and consumption is free.

PILOT: Boards at ZERO buoy.

Note: There is no VHF radio contact possible and there is no signal station available, ETA should be given as exact as possible.

RESTRICTIONS: Max. draft to enter: 25 ft. (on HW).

If ship's draft is more than 25 ft. ship has to lighten into lighters. This is done in Baie d'Halong. The procedure is that after embarking the pilot at Zero buoy, the ship is brought to this bay (in daylight hours only) via: Bai de Lan Ha – Entree Profonde – Rade du Crapaud – Chenal du Volta – Chenal de la Cathedrale.

In our case we anchored in Chenal de la Cathedrale; 20° 52′ N. 107° 03′ 06″ E. and discharged our gas oil cargo into tanker barges varying in size from 125 – 400 long tons. Some coastal tankers (1,500 – 2,000 long tons) are also available for accepting the cargo.

When discharging into lighters – ship should provide suitable hoses.

GENERAL: 1. Ship was cleared by authorities at this anchorage. In view of the distance to Haiphong – 5 hrs. by motorboat – this clearance is only given in daylight hours. Often the ship's Agent stays on board during cargo operations.

2. Because the radio transmitter is sealed, no direct contact with the outside world is possible. All messages for the Agents at Haiphong should be given to the lighters going there.

3. Medical assistance: A doctor and Hospital is available in Hongay – on the other side of the Baie d'Halong. The doctor inspects the patient first on board before permission to go ashore is given.

4. Outward clearance: Same procedure as inward clearance. Authorities come by motorboat from Haiphong (boat leaves there at about 0600 and arrives in Halong Bay at about 1100 hrs. Passports are handed back to crew.

5. On inward as well as on outward clearing, crew has to stay in their cabins for inspection by customs and security officials.

AGENTS: Vietnam Ocean Shipping Agency, 11 Dai lô Tran Phu, Haiphong. Phone: 166-245-513. Telegrams: VOSA Haiphong.

HO CHI MIN CITY: 10.45 N. 106.45 E.

DOCUMENTS: On arrival at Nha-be or at the Port. As usual, the examination is executed immediately by the Officers representatives of: Sanitary Service, Immigration Service, Customs Service, Police Service, Stevedoring Agencies.

	Customs		*Immigration*	*Quarantine*		
Documents	*Vung-tau*	*Ho Chi Min City*	*Ho Chi*	*Min City*	*Agent*	*Total*
Health Declaration (form issued by local authority)				×		
International Certificate of Vaccination for Passengers and Crew				×		
Ship's Deratisation Certificate				×		
Immigration Declaration (form issued by local authority)			×			
Passengers' Passports (if any)			×			
Crew Lists	2	3	2	1	2	10
Passenger List in Transit (if any)	2	3	2	1	1	9
Passenger Disembarking Lists (if any)	2	3	2	1	1	9
Mail List	1	3			1	5
Arms and Ammunitions List	2	3	2		1	8
Explosive List	2	3	2		1	8
Narcotic List	2	3			1	6
Store List (including engine store)	2	3			1	6
Foreign Currency List (including crew and ship's cash)	2	3			1	6
Crew Dutiable Goods List or Personal Belonging List	2	3			1	6
Inward Cargo Manifests for Tankers	2	3			2	7
Inward Cargo Manifests for Dry Cargo Vessels	2	6			1	9
Transit Manifests	2	2			1	5

Stevedoring Agencies:

8 Ho Chi Min City Inward Cargo Manifests or In-transit Cargo Manifests at Ho Chi Min City.
2 Crew Lists.
All Original Cargo Manifests.
3 Landing or In-transit Passenger Lists.
2 Landing Passengers Luggage Lists.
2 Free of Tax Goods Lists.

Ho Chi Min City Port Authority:

Following Documents are to be presented to the Ho Chi Min City Port Authority by the Stevedores:

1 Report, informing the arrival of the ship.
2 Cargo Plans on board.
3 Cargo Manifests.
3 Cargo Unloading Plans.
1 General Cargo Unloading Permit.
6 Requests to Sanitary Officer for sanitary examination operation.

Important Notices:

(1) Manifests of Ho Chi Min City Inward Cargo are to be compiled by complete set, each set comprising original port's manifests; a recapitulation table will be added to each set indicating the total amount of parcels, tonnage or volume loaded on board for each port. This total amount will be repeated in all letters, stating: "This total amount has been visaed by the Customs Office."

(2) On arrival at Vung-Tau, (Cape St. Jacques), the Commandant of the ship should collect all required documents and get them ready to be presented. The Quarantine Officials may possibly come unawares on board for prior examination and would never admit mistakes.

PILOTAGE: Upon arrival at pilot station the pilot service should be informed by cable of the exact position of anchorage, draft of the vessel, and the maximum speed the ship can do in the river.

Every evening from 2000 hrs. to 2200 hrs. (local time) radio watch should be kept with Ho Chi Min City XVS on the frequency of 500 kc/s. In case the vessel is to proceed up the river the next morning the pilot service will cable the Captain the exact hour of departure from Cape St. Jacques (Vung Tau).

The pilot service will not send any Pilot to ships that do not give the information as to draft, speed of vessel, and exact position at the anchorage station at Cape St. Jacques (Vung Tau).

Pilot station at Vung Tau, tel. 6. Pilot station at Ho Chi Min City, tel. 21222 and 90503. Pilot boards at Vinh Dua (Gulf of Coco Trees).

RESTRICTIONS: River transits, berthing and unberthing are effected in daylight hours only. Vessels should arrive 2 hours before daylight HW. At least 1 ft. keel clearance required. Least depth in channel, 27 ft. below chart datum.

ANCHORAGE: In depths of about 30 ft.

MAX. SIZE: Length 673 ft. Vessels can proceed without restrictions above 27 ft. depending on daily tide.

RADIO: Ho Chi Min City Radio, call sign XVS.

HEALTH: Port officials board at Vung-Tau if vessels call at Vung-Tau. Free pratique will be obtained from local authorities. For vessel calling at Ho Chi Min City, port officials will board upon docking alongside at Ho Chi Min City. Port and free pratique will be pratique at Ho Chi Min City.

TUGS: Available up to 2,600 h.p. Tankers usually berth without tug assistance.

BERTHING: Depth at quays 26 ft. to 36 ft.

TANKERS: Discharge at Nha-Be: Ex-Caltex Terminal, narrow pier with mooring buoys, depth in berth 27 ft. Ex-Shell Terminal, "T" jetty with mooring buoys, depth in berth 31 ft. Ex-Stouvae Terminal, pier with mooring buoys, depth in berth 30 ft. No slop disposal facilities.

DENSITY: About 1005 at berths.

MEDICAL: Doctors and hospital facilities available.

FRESH WATER: Can be supplied by barge subject to advance notice of 24 hours.

FUEL: Diesel oil can be supplied.

REPAIRS: Machine shop facilities only.

AIRPORT: Situated about 5 miles from the city. International services.

NOTES

Please also advise Shipping Guides Ltd.

Virgin Islands

FREDERIKSTED, St. Croix: 17.43 N. 64.53 W.

DOCUMENTS: All forms are standard U.S. Government Forms:
Passenger List (I–418) – 3 copies.
Crew List (I–418) – 3 copies.
Clearance from Last Port.
Inward Customs Manifest (7527-B) – 4 copies.
Ship's Stores Declaration – Customs Form 1303 – 2 copies.
Crew Effects Declaration – Customs Form 1304 – 1 copy.
(Also see separate headings – "Health" – "Customs" – "Immigration".)

PILOTAGE: Services available day or night. Payment for Pilot services is mandatory whether Master uses Pilot or not. (Vessels commissioned by the U.S. or foreign government, yachts and vessels under 100 gross tons are exempt from pilotage fees, except when the services of a Pilot are requested).

ANCHORAGE: Open roadstead on the lee (West) side of St. Croix, providing a good anchorage with no significant tide.

TUGS: None readily available – tugs can be arranged with 48 hours advance notice.

BERTHING: A government-owned pier with a 1,400 ft. long approachway, bridging Maritime Zone to a pier-head 240 ft. long by 60 ft. wide. Vessels 600 ft. and over with a max. forward draft of 25 ft. have been accommodated.

RADIO: *(a)* Vessels may communicate with Island via:

Mackay Radio, Amagansett, New York	Call Letters WSL
Chatham, Massachusetts Radio	Call Letters WCC
Lantana, Florida Radio	Call Letters WOE
Barbados Radio, Barbados	Call Letters VPO
Destrellan Radio, Guadeloupe	Call Letters FFO
Fort de France Radio, Martinique	Call Letters FFP
Tuckerton Radio, New Jersey	Call Letters WSC

All stations maintaining 24-hour service. These radio stations then relay the messages by cablegram to Frederiksted via either ITT World Communications Inc. or Cable and Wireless, Western Union International.

(b) Master of every vessel arriving Frederiksted is required to give at least 24 hours advance notice of arrival to Captain of the Port, U.S. Coast Guard – San Juan, Puerto Rico, by wireless on 500 kc/s. or by radio telephone 2182 kc/s.
Call Letters for U.S. Coast Guard, San Juan, Puerto Rico – NMR.

(c) Masters are requested to advise Agent their expected time of arrival as far in advance as is possible, vessels arriving from ports other than U.S. or Caribbean Islands should give at least 7 days notice, and vessels arriving from U.S. ports should give at least 4 days notice. In addition, a message should be sent verifying arrival at least 48 hours in advance, with delays reported as necessary. Arrival messages should include information regarding repairs, stores, number of crew and passengers on board. If cash is required, a minimum of 7 days (prior to date of arrival) notice is mandatory.

(d) While vessels are in Frederiksted the authorities do not permit the use of the ship's radio transmitters.

(e) Vessels equipped with VHF equipment should commence radio watch on Channel 16 when vessel is 100 miles from St. Croix. Contact with Agents and shore facilities can be made direct or via Virgin Islands Marine Operator – Station WAH – Call Letters WAH.

FRESH WATER: Very limited, delivered by truck.

TIME: GMT minus 4 hours. Atlantic Standard Time.

HOLIDAYS: The following are legal holidays: Sundays; January 1st (New Year's Day); January 30th (Roosevelt's Birthday); February 12th (Lincoln's Birthday); The third Monday in February (Washington's Birthday); March 31st (Transfer Day); Holy Thursday; Good Friday; Easter Monday; Whit Monday; Last Monday in May (Memorial Day); June 22nd (Organic Act Day); July 4th (Independence Day); July 2nd (Supplication Day); The first Monday in September (Labour Day); The second Monday in October (Columbus Day); The fourth Monday in October (Veterans Day); November 1st (Liberty Day); The fourth Thursday in November (Thanksgiving Day); December 25th (Christmas Day); December 26th (Christmas Second Day), and such other days as the President or the Government may by proclamation declare as holidays.

The following are legal half-day holidays, commencing at Noon, viz: Every Thursday during the months from April to November, inclusive, except Thursdays in those weeks where there already is a legal holiday other than Sunday. Whenever any holiday falls upon a Sunday, the Monday following is a legal holiday.

REGULATIONS: The U.S. Coast Guard strictly enforces the Harbour Pollution Act of 1924, prohibiting discharge of refuse and oil in navigable waters of the U.S. Virgin Islands. Local Port Regulations are similar to those applying in U.S. Mainland Ports.

HEALTH: See "Health Regulations" before first U.S.A. Port (Albany).

Garbage should be disposed of beyond the 3-mile limit. On passing the 3-mile limit all garbage disposal units which open to the sea should be closed. All garbage should then be placed in covered cans and retained on board until the ship is again beyond the 3-mile limit.

CUSTOMS: Customs Officers will board at anchorage or wharf berths, and will require an accommodation ladder.

Vessels required to enter and clear through Customs House:
Vessels loading or unloading cargo;
Vessels embarking or disembarking passengers;
Vessels remaining in port over 24 hours:
Vessels requesting permission for their passengers to go ashore during the stay of the vessel in port.

Vessels in above categories must present following documents:
Clearance from Last Port;
3 copies of Crew List (Form I.418) or substantially similar form – see note below*)
3 copies Passenger List (Form I.418) or substantially similar form – see note below*)
4 copies Inward Foreign Manifest covering all cargo for discharge at St. Croix, V.I., showing weights or measurements (of basis of how cargo is freighted) on all items (Customs Form 7527-A or 7527-B).
2 copies Stores List (Engine-Deck-Commissary-Narcotics).
1 copy Crew Effects Declaration (Custom's Form 1304).

* List of passengers and crew shall be on Customs and Immigration Form I.418 or on a substantially similar form, except that where no steerage passengers are aboard upon arrival, the listing of the passengers may be in the form of a vessel "Souvenir List". Or similar list, in which the names of the passengers are listed alphabetically by class.

Sealing of Stores: Upon arrival of a vessel from a foreign port, or a vessel engaged in foreign trade from a domestic port, sea stores and ship's stores not required for immediate use of consumption on board while vessel is in port and articles acquired abroad by officers and members of crew, for which no permit to land has been issued, shall be placed under seal, unless customs officer is of the opinion that circumstances do not require such action. Customs Inspectors in charge of vessel, from time to time, may issue stores from under seal for consumption on board by passengers and crew.

Passengers disembarking must present personal baggage declaration if from foreign.

IMMIGRATION: Recommended that Masters who are unfamiliar with U.S. Immigration Procedure should seek clarification from Agents as far in advance as is possible.

If a vessel arrives direct from a United States mainland port or from Puerto Rico no immigration inspection will be performed. If a vessel arrives direct from a foreign port the vessel shall undergo immigration inspection.

Vessels arriving without a visaed crew list, may be able to obtain a waiver from Officer in Charge of U.S. Immigration & Naturalisation Service, by making application on Form I.193. A fee of $10.00 is required to obtain a waiver.

In order to expedite the clearing of the vessel, it is suggested that prior to arrival all passengers subject to inspection should be assembled where the inspection is to be performed.

Stowaways must be reported in ETA Message and listed on a Passenger Manifest (Form I.418) and on Form I.94, and must be reported to the U.S. Immigration Officer as soon as he boards.

All non-resident alien crew members, whether shore leave is required or not, are required to have in their possession valid Passports, Seamen's Book or Identification Card (with photo) and Form I.95 (crewman's Landing Permit) or Form I.184 (Alien Crewman's Permit and Identification Card) on arrival. All resident alien crew members are required to have in their possession Alien Registration Receipt Card (Form I.151) on arrival.

SHORE GANGWAYS: Available.

LAUNCHES/TENDERS: Not available.

AIRPORT: Distant 8.5 miles.

AUTHORITY: Virgin Islands Port Authority.

LIMETREE BAY, St. Croix: 17.41 N. 64.44 W.

LOCATION: The facilities of Hess Oil Virgin Islands Corp. (Hovic) are located in Limetree Bay on the South coast of the island of St. Croix, U.S. Virgin Islands. St. Croix is 32 miles South of St. Thomas and St. John Islands and 50 miles S.E. of the island of Puerto Rico. It is the largest of the U.S. Virgin Islands being 19 miles long and averages 3.5 miles in width.

The sea buoy "ELB" No. 2 marking the entrance to Limetree Bay channel is located in 60 ft. of water on the Westerly side of the channel: Latitude, 17° 40′ 42″ North, Longitude 64° 44′ 18″ West.

The sea buoy is painted red and is equipped with a flashing white light having a 1 second flash, 9 second eclipse with a visibility of 7 miles.

DOCUMENTS: Clearance (U.S. – Foreign). Inward clearance is effected on board immediately after docking Clearance should be made for Christiansted, St. Croix, via Limetree Bay.

The following documents are required by the Customs and Immigration authorities for entry and clearance:
Master's Certificate on Preliminary Entry.
Master's Oath.
Stores List.
Crew Purchase List (Curio List).
Inward Foreign Manifest.
Quarantine Free Pratique.
Deratisation Certificate.
Crew List (Certified).
Clearance from Last Port.
Crew men Landing Permits.
Passenger List (if any passengers).

PILOTAGE: Service is available 24 hours a day and is compulsory for all vessels using HOVIC facilities in Limetree Bay. The HOVIC Harbour Master acts as Pilot and will assist the Master in docking and undocking vessels using Hess facilities; however, the Master of the vessel retains full responsibility for the ship at all times. The Pilot can be contacted by VHF Channel 16. Pilot boards at the sea buoy, position 17° 40.7′ N., 64° 44.3′ W. Vessels over 45,000 d.w.t. are subject to movements in daylight only. Vessels should remain outside the sea buoy until boarded by the Pilot. The Pilot will be placed aboard by a company tug.

The tug HOVIC 1 is equipped with a radio-telephone having the following crystals: 2182 kc/s. U.S.C.G., 2638 kc/s., Ship to ship. 2738 kc/s., Ship to ship 2134 kc/s., San Juan, Puerto Rico and Galveston, Texas. Ships having the above crystals should call the HOVIC 1–3 hours before their arrival at the sea buoy, and advise of any change in their ETA.

ANCHORAGE: There is no suitable anchorage for deep draft vessels off the port. Normal practice is to stop engines and wait 6 to 8 miles from the sea buoy if required to wait instructions. In bad weather vessels should proceed to Frederiksted and anchor in the vicinity of the long pier in depths of 30 to 60 ft. Vessels shall have their anchors ready to let go upon entering the channel into Limetree Bay.

APPROACHES: Entrance to channel marked by a black sea buoy, equipped with a white flashing light, visible 8 miles. The buoy (ELB No. 1) (flashing every 5 seconds) is at the West side of the channel (Lat. 17° 40′ 42″ N., Long. 64° 44′ 18″ W.). At sea buoy there is 60 ft. of water and the channel has a depth of 60 ft. to Nos. 3 and 4 berths.

The turning basin opens up Eastward from the channel line and is approximately 1,200 ft. long and 1,000 ft. wide. The West turning basin is 1,500 ft. by 1,200 ft. with a max. depth of 35 ft.

RESTRICTIONS: Navigation permitted 24 hours a day except for ships over 50,000 d.w.t.

The Harbour Master will check and report on each vessel's draft before piloting them inbound or outbound.

HEALTH: National quarantine laws are enforced in the U.S. Virgin Islands by officers of the U.S. Public Health Service. All vessels are subject to inspection.

RADIO: Masters are requested to advise both HOVIC – St. Croix and their Agents by radio 48 hours and 24 hours in advance of their ETA giving the vessel's name, date and hour of arrival (local time), bunkers and water required.

TUGS: Tug assistance in the channel, docking and undocking is mandatory and is provided by 3×1,800-h.p. diesel tugs stationed in the port to provide this service. All tugs are under the orders of the HOVIC Harbour Master and are equipped with fire pumps and monitors to assist in fire fighting.

There are also 2 tugs of 7,000 h.p. available for the mooring of large tankers.

BALLAST: United States laws prohibit the pumping overboard of dirty ballast while a vessel is within U.S. coastal waters. All ballast must be pumped to facilities available ashore. However, if a vessel is especially equipped with clean segregated systems which are reserved for ballast use only, it is permissible to pump overboard at the dock after first being inspected and approved by the Dock Master.

In pumping dirty ballast ashore, the ballast is received through 1×12-in. shore line at a max. discharge pressure to shore installations of 125 p.s.i. The ballast is pumped into a ballast facility about 1 mile North of the dock. Due to the limited facilities and to the possibility of 2 vessels deballasting at the same time, it is requested that vessels arrive with the min. possible ballast.

The U.S. Oil Pollution Act of 1924 applies to the Pollution of Coastal Waters. Violators are subject to fines of up to $2,500 and a year's imprisonment for each offence.

NOTICE OF READINESS: Notice of readiness to load or discharge is a warranty that the vessel is in all respects ready to load or discharge, and that all of the ship's equipment (including, but not limited to tanks, pumps, valves, and pipe-lines) is ready and fit to load or discharge petroleum and/or petrochemical products. Notice of readiness will not be accepted unless the vessel is in all respects ready to load or discharge as appropriate. Vessel will not be deemed ready to load or discharge and pumping will not commence until the senior deck officer shall have executed and delivered to HOVIC a "Declaration of inspection prior to bulk cargo transfer" as required by U.S. Coast Guard Regulations.

BERTHING: A shore gangway is provided.

There are at present, 7 berths on finger pier, 3 on East side and 4 on West side.

Deepest berths are No. 3 and No. 4 each with 60 ft. depth of water alongside.

LOADING: Loading operations are normally carried out at relatively high pumping rates. Loading rates may be reduced by request. Loading cargo overall will not be permitted without specific written authorisation from HOVIC'S General Manager.

Hose pressures should not exceed 125 p.s.i. during loading or discharging.

Oil Dock is serviced by: 1×24-in. diameter crude line, 1×24-in. diameter No. 6 oil line. 1×20-in. diameter gasoline line, 1×20-in. No. 2 oil line, 1×10-in. diameter kerosene line, 1×12-in. diameter ballast line, 1×8-in. diameter fresh water line.

4×10-in. hoses are available for connecting up to each of the 20 in. and 24 in. shore lines – single 10 in. hoses are available for the kerosene and ballast lines.

Oil Dock 2 serviced by: 1×24-in. diameter crude line, 1×24-in. diameter 6 oil line.

MEDICAL: Medical attention is generally available from the public hospital at any hour of the day or night to crew members of all vessels. The representative of the ship's Agent should be contacted by the Master with any requests for medical attention for the crew. For each man needing medical or dental attention, a form should be completed in duplicate and signed by the Master, or in his absence, by the Chief Officer. The form should provide the date, patient's name, rating, and the name of the vessel. In case of emergency, or when a patient cannot be moved from the vessel, the Master should advise the ship's Agent by radio if at sea, or on the telephone if in port.

DENSITY: 1025.

FRESH WATER: The island of St. Croix is dependent almost entirely on rainfall for its supply of fresh water. There are wells but many of them are rather saline in nature. As a result fresh water is scarce and expensive. In conjunction with its refinery operation HOVIC operates a desalination plant and limited quantities of fresh water are available providing at least 48 hours notice of these requirements is given prior to the ship's arrival. All fresh water is metered aboard ship.

FUEL: Both No. 6 fuel oil (Bunker C) and light marine diesel are available by prior arrangement. Advice concerning quantities should be given in the vessel's arrival message (ETA) sent 48 hours prior to arrival.

DEVELOPMENTS: New docks under construction.

AIRPORT: Situated 5 miles from port facilities.

SHORE LEAVE: Under normal circumstances, no restrictions are imposed by the Immigration Authorities on shore liberty. Masters are requested to have all crew members on board at least 1 hour prior to departure time, to avoid delay "awaiting crew members". If crew members of foreign vessels are to be given shore leave, Form I-95 must be prepared for each member of the crew.

TIME: The U.S. Virgin Islands use Atlantic Standard Time, which is four hours slow of Greenwich Mean Time.

GENERAL: *(a) Immigration:* The United States immigration laws apply in the U.S. Virgin Islands. Passports and visas are required.

(b) Customs: The customs collection district of the U.S. Virgin Islands is under the jurisdiction of the U.S. Treasury Department but has its own Customs laws.

(c) Liquors: The transportation of alcoholic beverages inside HOVIC's property is strictly prohibited; consequently, no liquor or beer may be removed from vessels, the only exception to the foregoing is in the case of bonded stores ordered by Masters.

(d) Visitors: No visitors are permitted in the dock area. Only persons on official ship's business are permitted on the piers.

(e) Laundry: Only limited facilities are available to handle ship's laundry.

(f) Surveyors: Representatives of the American Bureau of Shipping, Lloyd's Register and other maritime classification societies are available in San Juan, Puerto Rico on 12 to 24 hours notice. The ship's Agent will assist Masters in soliciting their services.

(g) Mail: Official and personal mail will be delivered on board by the ship's Agent when vessels are being cleared inwards. Mail received for vessels while in port will be delivered on board prior to sailing. Outgoing mail is accepted from Masters, provided it is accompanied by a mail transmittal slip to support disbursements.

(h) Transportation: Walking through the refinery is not permitted. Arrangements for transportation will have to be made through the ship's Agent or the Refinery General Manager's Office.

(i) Supplies and Repairs: Limited supplies of provisions and marine hardware are available on the island. There are no facilities for major repairs closer than San Juan, Puerto Rico. Machine shops in Christiansted and Fredriksted can assist in making minor repairs.

(j) Overloading: Masters are advised that the international laws are strictly enforced with regard to overloading and should be guided accordingly. In cases where overloaded cargo has to be discharged, all expenses incurred, including ship delay, will be for the vessel's account.

(k) Weather Conditions: The loading and discharge of all crude petroleum and its products will be stopped during any electrical storm. Ullage screens or ullage plugs must be in place. Loading gasoline or other similar low-flash products will be stopped during periods of calms when the heavy vapours cannot be dispersed quickly enough to prevent hazards from accumulated gas pockets. Ship's officers are cautioned to be on their guard during such conditions. In the event of abnormal weather conditions in the area, such as a hurricane, vessels will be notified that additional moorings are required. If the situation so demands, Masters will be told to suspend all operations and proceed to sea until normal weather conditions again prevail.

(l) Demurrage: Vessels are required to vacate berth promptly upon completion of cargo handling operation (loading or discharging operations, as the case may be). Permission to lay alongside at any time the vessel is not engaged in cargo handling operations must be granted in writing by the Dock Master. The Harbour Master will keep vessels advised of other vessels awaiting berth. If any vessel fails to vacate its berth upon completion of cargo handling operations and expiration of free laytime for dock usage as outlined below, the vessel will be responsible for penalties and demurrage as follows:

- *(a)* To pay dock demurrage.
- *(b)* To hold HOVIC blameless for any demurrage and damages incurred as a result of other vessels awaiting berth.

The following rules shall govern the determination of demurrage:

- *(a)* One hour free laytime will be allowed after completion of cargo handling operations. This free time will start at the time cargo hoses are disconnected from the ship's manifold on completion of loading or discharge of cargo. Vessels awaiting cargo papers and/or Customs clearance must vacate the berth within 1 hour of such completion and move outside to wait for their papers.

(*b*) Three hours free laytime will be allowed for ballasting after discharge operations.

AUTHORITY: Hess Oil Virgin Islands Corp.

ROAD HARBOUR & PORT PURCELL, Tortola, British Virgin Islands: 18.25 N. 64.37 W.

PORT LIMITS: All the area of water North of an imaginary line drawn from Burt Point to Hog Point (see B.A. Chart 2020).

DOCUMENTS:

Clearance from last port;
1 Declaration of Health Certificate;
4 Crew Lists;
2 Crew Store Lists;
2 Ships Stores Lists;
2 Passenger Lists.

PILOTAGE: Only compulsory for vessels of 200 n.r.t. and over, when proceeding alongside or leaving Port Purcell unless a vessel is in possession of a valid Exemption Certificate issued by the Ports Manager. Pilot boards at Port limits after receiving advice from Agents preferably 12 hours prior to arrival. Link calls made through Tortola Radio, Channel 27 daytime and Channel 16 at night.

Vessels arriving ahead of ETA sound "G" on whistle if unable to advise Agent.

No inward pilotage at night, unless emergency, night Pilotage outwards by special arrangement.

ANCHORAGES: Between Buck Island and Beef Island or immediately South of Port limits, approximately 12 fathoms.

RESTRICTIONS: Anchorage within Port limits prohibited unless authorised by Ports Manager, max. draft alongside Port Purcell 22 ft.

MAX. SIZE: Tanker anchorages independent of Port Authority and maintained by Shell and Esso, for small vessels only, little tidal influence.

HEALTH: Customs issue pratique for vessels with clear bill of health, otherwise request doctor to board on arrival alongside or at anchor.

RADIO: Cable and Wireless maintain a Public Coast Station on Tortola, callsign Tortola Radio, with an approximate range of 50 miles and provides linked telephone calls between ships and any shore based telephone subscriber. Continuous watch is kept on Channel 16.

For distances in excess of 50 miles any other convenient shore station, (eg. Barbados, St. Thomas) that will accept messages for onward cabling or telephoning to Tortola.

BERTHING: Port Purcell quay is 800 ft. long, max. draft 21 ft. at any state of tide, salt water. Ships discharge with own gear.

CRANES: Port Purcell has 1 mobile shore crane, max. lift 8 tons. Prior advice required for use.

MEDICAL: Hospital facilities available, no routine inoculations, etc., required unless specially notified.

DENSITY: Entirely salt water within port limits.

FRESH WATER: Available in limited quantities at Port Purcell, approx delivery 20 t.p.h. and costs US$5.00 per 1,000 gallons.

FUEL: Diesel only for small vessels delivered by road tanker to Port Purcell, 2 hours notice.

REPAIRS: Elementary only.

HATCHES: Opened and closed by crew.

CUSTOMS ALLOWANCE: No sealing of tobacco, wine or spirits.

AIRPORT: Beef Island, 7 miles, regular local flights to St. Thomas, Puerto Rico, Antigua which connect with several main lines to Europe and the Americas.

TIME: GMT minus 4 hours.

HOLIDAYS: Port Purcell closed Xmas Day, Good Friday and August Monday (1st in month).

POLICE/AMBULANCE/FIRE: Dial 999.

TELEPHONES: Telephones available for use on board ship, cost for connecting US $25.00 and 8 cents for local calls.

SHORE LEAVE: No restrictions for crews.

IDENTIFICATION CARDS: None required.

DELAYS: None should be expected. Cargo working is geared to ship's arrival irrespective of time and 24 hours continuous working if required.

AUTHORITY: Ports Manager and Harbour Master, Road Town, Tortola.

ST. THOMAS: 18.20 N. 64.56 W.

Harbour of St. Thomas, U.S.V.I. situated on South side of Islands of St. Thomas. It is 1,434 miles from port of New York. Northern side of Islands borders on Atlantic Ocean, and Southern side on Caribbean Sea. The Harbour is one of the best in the West Indies, being almost landlocked.

WEATHER: There is a signal station on Cowell Hill which shows storm signals. The weather is usually mild with little wind. Squalls when they occur, usually come from the N.E.

DOCUMENTS: *Quarantine.* – see "Health". *Customs* – see "Customs". *Immigration* – see "Immigration". *Agent:*

1 Copy Crew List (Form I. 418).
1 Copy Passenger List (Form I. 418).

PILOTAGE: Compulsory and available day and night. Pilot Boat has letter "P" on deck house and flies International Code flag "P". Pilots will meet vessels 1 to 3 miles outside harbour, boarding via Jacob's ladder.

ANCHORAGE: Outer Harbour Anchorage located beginning at Scorpion Rock Lighted Buoy No. 1 (18° 91′ 25.6″ N: 64° 55′ 8″) thence 180° 1,580 yards; thence 263°, 2,490 yards; thence due North 1,255 yards; thence due East to the Southerly tip of Sprat Point, Water Island; thence to Cowell Point, Hassel Island, and thence to point of beginning. This anchorage is considered good and is about 8 fathoms with sand bottom.

TUGS: Normally not considered necessary for docking, however tugs are available for docking and undocking ships.

RADIO: The St. Thomas Marine Operator will guard the following from 0600 to 2100 hrs.: Channel 26, 16 VHF, 2009–2506 and 2182 AM, and the upper side band (2010.4–2507.4) of the same frequency. The Harbour Master's Office maintain a 24-hour watch on VHF Channel 16 (talk Channel 12).

(*b*) Master of every vessel arriving St. Thomas is required to give at least 24 hours advance notice of arrival to Captain of the Port U.S. Coast Guard – San Juan, Puerto Rico by wireless on 500 kilocycles or by radio telephone 2182 kilocycles.

(*c*) Masters are requested to advise Agents their ETA, at least 36 hours in advance. Arrival messages should include cash requirements (local currency U.S. Dollar) and advice regarding repairs, stores, etc. This information is particularly necessary in the cases of vessel arriving on weekends or holidays. For cruise vessels the arrival messages should also include the number of passengers and crew on board.

(*d*) While vessels are in St. Thomas Harbour, the authorities do not permit the use of the ship's radio transmitters.

(*e*) U.S. Coast Guards: This organisation maintains a small Light Attendant Station in St. Thomas to observe, service and effect repairs to aid navigation in vicinity of St. Thomas. An 82-ft. Coast Guard Patrol Boat "Point Whitehorn" (82364) is attached to the station for primary purpose of search and rescue work. Maintains watch on VHF Channel 16. Radio telephone marine information broadcasts, including Notices to Mariners, will be made on 2670 kc/s., after first making a preliminary announcement on 2182 kc/s. Radio telephone urgent and safety broadcasts or Marine Informations will continue to be made on 2182 kc/s.

BERTHING: Wharf of the West Indian Company Limited, located on Eastern shore of harbour basin. Wharf is bulkhead type, 2,234 ft. long, running N.E./S.W., and is well protected to seaward. Mooring bits are spaced at intervals of 50 ft. There is a "cut out" in the wharf 950 ft. from N.E. corner, which is 22 ft. wide and approximately 3.5 ft. above low water. This ramp is slanting from 8.3 to 3.5 ft. over a distance of 20 ft. Similar type of ramp located on West Corner of wharf. Safe depth alongside from 27 ft. near N.E. end to 30 ft. on S.W. end. Bulwark is 8.3 ft. above mean tide. Average difference between high and low tide is 11 in.

Dockages dues are payable to the West Indian Company Limited, as per tariff.

In the Crown Bay area (access via East or West Gregerie Channels) the VI Port Authority maintains facilities which include a "T"-head pier extending 500 ft. from shore, where ships up to 25,000 g.t. can moor to breasting dolphins 200 ft. on centres, and mooring dolphins 200 ft. fore and aft from them. Controlling depth presently 30 ft. This pier is used for berthing tourist and tanker vessels only. A curved bulkhead at top of Crown Bay, approximately 900 ft. long, is used for roll-on/roll-off, container and break bulk cargo. Controlling depth 15 ft. 24-hour arrival notice is required.

CARGO HANDLING: Containers are handled at the West Indian Company and the Crown Bay area (VI Port Authority), but no special gantry cranes are available. Roll-on/roll-off cargo handled at these facilities as well. No liquid chemicals facilities exist here but there is a small privately-owned LPG plant limited to 20 ft. draft and 250 ft. length. Shell uses this facility for gasoline and light diesel. The "T"-pier in Crown Bay is used for the VI Water and Power Authority for movement of fuel and water, and Texaco has its own pipe-line on the same pier for their products.

STEVEDORES: Discharging and/or loading arranged by the West Indian Company Limited for account and risk of vessels.

Rates of discharging and /or loading dependent on vessel's equipment and stowage. However, following may be considered average:

General Cargo 6 weight tons per gang hour.
Bagged Goods 8/10 weight tons per gang hour.
Lumber 10/12 weight tons per gang hour.

Each stevedore gang normally consists of 12 stevedores (10 on board and 2 ashore) 2 winchmen, 1 signalman, 1 foreman.

FUEL: The West Indian Company Limited operates the bunkering terminal and are agents for Esso. Marine diesel fuel handled through 6 in. or 8 in. pipe-lines (4 in. or 6 in. hoses) at maximum rate of approximately 125 t.p.h., at the wharf of the West Indian Company Limited, where vessels drawing up to 30 ft. can be accommodated.

Delivery by barge is not available. Bunkers available at all hours, including Sundays and holidays. Owners of vessels must make prior arrangements for bunkers.

Overtime as incurred will be charged to ships for bunkers supplied outside normal working hours, Saturdays, Sundays and holidays.

FRESH WATER: Mostly rain water which when available is supplied by the West Indian Company Limited. Delivery effected by pipe alongside wharf. Water by barge can be delivered in St. Thomas.

MEDICAL: Local hospital is the Knud-Hansen Memorial Hospital, which is equipped with facilities for operations, etc.

TIME: Official St. Thomas time is Atlantic Standard Time, which is 4 hours behind GMT.

HOLIDAYS: The following are legal holidays in St. Thomas: Sundays; January 1st (New Year's Day); January 15th (Martin Luther King); January 30th (Roosevelt's Birthday); February 12th (Lincoln's Birthday); The third Monday in February (Washington's Birthday); March 31st (Transfer Day); Holy Thursday; Good Friday; Easter Monday; Whit Monday; The last Monday in May (Memorial Day);,June 22nd (Organic Act Day); July 4th (Independence Day); July 25th (Supplication Day); The first Monday in September (Labour Day); The second Monday in October (Columbus Day); The fourth Monday in October (Veterans Day); November 1st (Liberty Day); The fourth Thursday in November (Thanksgiving Day); December 25th (Christmas Day); December 26th (Christmas Second Day), and such other days as the President of the Government may by proclamation declare as holidays.

The following are legal half-day holidays, commencing at Noon, viz: Every Thursday during the months from April to November, inclusive, except Thursdays in those weeks where there is already a legal holiday other than Sunday. Whenever any holiday falls upon Sunday, the Monday following is a legal holiday.

REGULATIONS: The U.S. Coast Guard strictly enforces the Harbour Pollution Act of 1924, prohibiting discharge of refuse and oil in navigable waters of the U.S. Virgin Islands.

Local Port Regulations are similar to those applying in U.S. Mainland Ports.

HEALTH, CUSTOMS, IMMIGRATION: Refer to Frederiksted.

CONSULS: Following countries have consular representatives in St. Thomas.

Belgium
Denmark
Dominican Republic
El Salvador
France
Great Britain
Haiti
Netherlands
Norway
Panama
Sweden

AIRPORT: Distance 2 miles. Connections with International flights from Puerto Rico.

GENERAL: *Gangway.* 1 aluminium gangway available which is 34 ft. long and 2 ft. 6 in. wide – made with skidding prevention strips only and therefore not recommended for use as a passenger gangway. Since presently this is the only gangway it is made available to vessels on first-come-first-served basis.

Stores. St. Thomas should not be depended upon for large quantities of provisions or deck and engine stores, as practically all commodities are imported making prices higher than United States mainland ports and Puerto Rico. No regular Ship's Chandlers established in St. Thomas, V.I.

Storage Facilities: The West Indian Company Limited undertakes ordinary storage for a limited period of time in 8 transit warehouses, all 14 ft. high with a total floor area of 80,000 sq. ft., plus an additional 9,600 sq. ft. roof covered area. There is also a large uncovered area available for outside storage. Only limited cold storage facilities are available on The West Indian Company's Dock.

Ice: Small quantities may be obtained.

Laundry; Modern laundry service is available.

POLICE/AMBULANCE/FIRE: Police 915; Ambulance 774-1212; Fire 921.

AUTHORITY: Virgin Islands Port Authority.

NOTES

Please also advise Shipping Guides Ltd.

Western Samoa

APIA: 13.50 S. 171.45 W. (See Plan Book)

DOCUMENTS:

1 Clearance from previous port of call.
3 Crew Lists.
3 Passenger Lists.
2 Health Documents.
1 Manifest.
Bills of Lading.
Ship's Papers (stores and poisons).
List of Dangerous Goods.

PILOTAGE: 72 hours ETA is required, confirm 24 hours before arrival. Pilotage is compulsory for merchant vessels. Pilot boards 1.5 miles outside harbour on line of leading beacons. Pilot boat painted white with yellow awning. "Pilot" written on both sides of wheelhouse in brass lettering.

By night, in addition to usual navigation lights, Pilot boat carries standard identification, i.e. a red light on foremast with all-round visibility. Exemption from pilotage may be granted to Masters of vessels trading regularly to Apia, but pilotage dues are still payable.

ANCHORAGES: In 20 fathoms outside a line drawn between the 2 reefs and preferably on line of leading beacons. Bottom is coral.

RESTRICTIONS: No night-time or tide restrictions. Turning basin dredged to 36 ft., extending to 1,200 ft. from each end of the wharf. Arrivals preferred during daylight hours.

MAX. SIZE: Shore bollards to take stern and bow lines for vessels up to 800 ft. in length. Max. draft 35 ft.

Buoy mooring for tankers up to 32,000 d.w.t. consists of 3 white buoys, 1 ahead and 2 astern. Vessel also uses starboard anchor.

HEALTH: Doctor boards vessel on arrival alongside.

RADIO: ETA's should be sent 72 hours before arrival, and confirmed 24 hours before. Signals to incoming ships by radio or radio-telephone from Apia radio station 5WA. For radio, ships should call on 500 kc/s. and operate on 483 kc/s. For radio-telephone, ships should call on 2182 and operate on 2162 or other available frequency as may be arranged once contact has been established. Apia maintains continuous service. Call sign "Apia Radio" repeated.

Apia radio maintains continuous service, and the Port Administrator and Harbour Master can be called on Channel 16 during normal working hours. The tug and pilot launch also operate on Channel 16 and all can switch to Channel 14 or 12 on request.

TUGS: 2 tugs available, *Pualale*, 670 h.p. (7 ton pull) and *Savaii*, 400 h.p.

BERTHING: Small charge made for use of hawsers and moorings. Export Wharf – reinforced concrete wharf 604 ft. in length on the East side of inner harbour. Max. depth alongside 36 ft. All loading and discharging is carried out with ship's gear. No wharf cranes available. This wharf and all surrounding areas enclosed by fence is Customs area and all vessels trading to or from places outside Western Samoa must depart from or arrive at this wharf.

New wharf 604 ft. long, vessels up to 800 ft. may be berthed.

Ro-Ro Facilities: At present Ro-Ro vessels discharge in middle of existing wharf. New Ro-Ro ramp is being constructed and should be operational early 1979.

No shore equipment except one 20 ton fork lift.

STEVEDORES: Arranged by ship's Agents.

MEDICAL: Advance notice to Agents preferable. No private doctors but good general hospital where seamen may be admitted.

TANKERS: Shell, Mobil, and B.P. operating in Samoa, and have own discharging facilities. Tanker terminal situated on West reef. Discharge line is 6 in. diameter. Launch service may be provided between ship and shore at a small charge.

DENSITY: 1025 – but may alter considerably during rainy season.

TIDES: Mean high water intervals 6 hours 27 minutes, Spring range 3.8 ft., mean range 2.6 ft. Tidal stream normally slight, but after heavy rain outflow from rivers and streams can cause it to become quite strong.

The current across the harbour entrance about 600 m. off the reef can be variable, but is predominantly Westerly and velocities up to 4 knots have been reported but this is not normal.

FRESH WATER: Available at wharf from shore installation.

FUEL: Only light diesel fuel available.

FIRE PRECAUTIONS: Fire services available on wharf, station is 0.5 miles distant.

GANGWAY/DECK WATCHMEN: Recommended and available.

OPENING/CLOSING HATCHES: Opened and closed by stevedores.

CUSTOMS ALLOWANCE: No enforcements.

IDENTIFICATION CARDS: Not needed.

CONSULS: The New Zealand High Commissioner represents all British subjects; French Consul, tel. 156. Australian High Commissioner, Embassy of the Chinese People's Republic.

REPAIRS: Minor repairs only.

AIRPORT: 25 miles from Apia on Western side of Island. Regular and frequent mail and passenger services. Direct to Auckland or USA via American Samoa.

TIME: GMT minus 11 hours. No alteration to clocks.

HOLIDAYS: No cargo on Sundays between 0300 and 2100 hrs. The recognised holidays are Christmas, New Year, Boxing Day, Good Friday, Easter Monday, Whit Monday, Anzac Day and Independence holidays from 1st June to 3rd June.

TELEPHONES: Police and public telephones near wharf and provisions are available for telephone connection to tourist vessels berthed at the wharf.

POLICE/AMBULANCE/FIRE: Hospital 21.212; Police 22.222; Fire 999 emergency or 20.404.

SHORE LEAVE: No restrictions.

GENERAL: *Supplies:* Provisions available. Deck and engine room supplies can be obtained in limited quantities.

Divers: No divers other than scuba divers are available, and skin divers may be recruited for up to 50 ft. diving.

Oil Pollution: The pumping of bilges, etc., within harbour limits is not permitted and *heavy penalties will be imposed for any breach.*

Garbage Disposal: The dumping of refuse of any kind within harbour limits is strictly prohibited. Properly covered receptacles will be made available and rubbish disposal vans will clear them as necessary. A small charge will be made for this service.

Charts: BA 1730 – Samoa or Navigation Islands.
BA 1339 – Plans in Samoa.
BA 2211 – Apia Harbour.

DEVELOPMENTS: New Ro-Ro ramp as above, construction has already started, expected completion November 1978.

New dry-docking system to take vessels up to 200 ft. keel length is under discussion, and preliminary studies have been completed. Expected to start construction when Ro-Ro ramp is completed.

AUTHORITY: Port Administrator and Harbour Master.

NOTES

Please also advise Shipping Guides Ltd.

Windward Islands

CASTRIES, St. Lucia: 14.00 N. 60.59 W.

(See Plan Book)

DOCUMENTS:

5 Crew Lists.
5 Passenger Lists.
1 Stores List.
1 Clearance from Last Port.
2 sets of Manifest mailed prior to arrival.
2 copies each Bills of Lading.
3 copies each of Manifests on arrival.
1 Health Certificate.

PILOTAGE: ETA to Agents at least 48 hours in advance, and further advice if any changes. Agents inform Pilot's office of expected time. Ship remains approximately 3 miles out of harbour, and is located by Lighthouse guard who immediately informs Pilot's office. Pilot meets ship in Pilot boat – *Bertram* 25 ft. Hard top with a "V" hull and twin inboard outboard Mercruiser engine complete with navigation and pilot lights. Painted dark blue all around, with letter "P" painted in white on both sides of bow. Signal for Pilot: day time flag "G"; and night: white light or blue light. VHF and 2182. Pilot embarks on the starboard side via Pilot ladder.

ANCHORAGE: North of leading lights, about 0.5 mile from harbour, depth about 12 fathoms.

RESTRICTIONS: No ship exceeding 100 nett registered tons must enter without a Pilot.

MAX. SIZE: Not longer than 600 ft. (cargo and passenger). Tankers – not longer than 400 ft. Alongside, all ship's draft 24 ft.

HEALTH: Pratique given by Pilot. Health Officer boards ship and if any infectious diseases are on board, ship is anchored out until doctor arrives.

RADIO: 2182 kc/s., 2527 kc/s., 2638 kc/s., 2146 kc/s., 2582 kc/s., 2381 kc/s.

VHF transmitting and receiving in the 156 mHz range on Channels 6, 12, 14 and 16.

These radio stations are situated at Vigie Lighthouse, Castries and at Moule-a-Chique Lighthouse, Vieux Fort operating on a 24 hour basis.

TUGS: Not necessary.

BERTHING: Berthing arrangements are made by the Port Manager before the ship's arrival having received the ETA.

Castries: Deep and sheltered anchorages off entrance. Approach channel 300 ft. wide, with min. depth of 6 fathoms. Turning basin 1,100 ft. in diameter, depth 6 fathoms. Inter-island cargo berth 450 ft. long, 12–18 ft. deep. Short stay cruise ship berth, 550 ft. long, 28 ft. deep. Also see "Shipmaster's Report".

Vieux Fort: Depth of 8 fathoms at the entrance and 5 fathoms within the Port. 2 berths, 500 ft. long, 27 ft. 6 in. deep. Also see "Shipmaster's Report".

MEDICAL: In urgent cases only, advise requirements in advance. Hospital facilities available.

TANKERS: Discharging by marine and floating hose, 6-in. and 4-in. lines. Berths alongside quay (2), off shore (2). Presently fuels discharged: Mogas 95 and 83, kerosene gas oil, colas RS2, cutback RC2, banana spray oil.

FRESH WATER: Available by delivery hose from water hydrant on wharf.

FUELS: Gas oil 48/52 DI-API. Viscosity at 60° 36.3 S.G. at 60° 0.8435.

GANGWAY/DECK WATCHMEN: Available if required.

OPENING/CLOSING HATCHES: By crew.

CERTIFICATES: Ship's Register required on board.

CUSTOMS ALLOWANCE: Tobacco, one carton of 200 cigarettes. Wine/Spirit, one quart.

CONSULS:

Norway	Tel. 2214	France	Tel. 2351–2
Portugal	Tel. 2811	U.K.	Tel. 2484–5
Holland	Tel. 2811		

REPAIRS: Only welding and painting work available.

DRY DOCKS: None.

REPATRIATION: Facilities available.

AIRPORT: Distance from wharf 2 miles. Flights per day 4. Airlines: BWIA, LIAT, Caribair.

TIME: GMT minus 4 hours. No alterations to clock.

HOLIDAYS: New Year's Day (1st January); New Year's Holiday (2nd January); Statehood Day (1st March); Good Friday (late March or early April); Easter Day (April); Easter Holiday (April); Labour Day (1st May); Whit Monday; Corpus Christi (late June); Queen's Birthday (12th June); Emancipation Day (1st Monday in August); Harvest Day (1st Monday in October); Discovery Day (13th December); Christmas Day (25th December); Boxing Day (26th December).

POLICE/FIRE/AMBULANCE: Police dial 99; Fire 97; Ambulance 95.

TELEPHONES: Arrangements exist for placing on board.

GENERAL: Ships arriving after 2000 hrs. cannot be attended to until 0700 hrs. following day.

SERVICES: Compass adjusting.

SHORE LEAVE: Allowed.

DEVELOPMENTS:

New Expansions. Under Plan "A":– (See Plan Book)

The new expansion includes 2 berths which will be built to accommodate vessels between 700 and 800 ft. in length with a draft of 35 ft.

There will also be a new container park storing up to 500 containers using the laneway system, but using block stowage, about 1,000 containers can be stored. This will increase storage capacity for containers to 3,500. After the new expansion is completed, there will also be a total upland of between 15–17 acres and covered space of 100,000 sq. ft. Provision is also being made for storing up to 200 reefer containers (8 ft.×8 ft.×20 ft.).

A new transit shed will be built with 40,000 sq. ft. and cold storage with 80,000 cu. ft. for reefer cargo.

An effective part of the port of Castries can already offer transhipment facilities.

Under Plan "B":—

Length of berth 500 ft. (vessels up to 600 ft. can easily be accommodated). Depth of berth 28 ft. 18,000 sq. ft. transit shed for stuffing and unstuffing containers. Storage space for containers – 1,000 of the international size 8 ft.×8 ft.×20 ft.

SHIPMASTER'S REPORT: January 1979. Castries.

Pilotage: Compulsory. Pilot boards 0.75 miles West of Vigie light, ladder usually on the port side.

Restrictions: Vessel is able to enter and leave at any stage of the tide, day or night.

Max. Size: Max. draft 23 ft. 6 in.

Tugs: Available.

VHF: Pilot on Channel 16.

Berthing: No. 6 Berth, West Wharf: Distance from entrance to berth 1 mile. Max. LOA (Approx.) 550 ft. Max. draft 23 ft. 6 in. There is mechanical equipment available to handle palletised cargoes, adequate storage space for breakbulk cargoes and palletised cargoes. There is no equipment for handling containers, however, there is sufficient storage space for containers. The loading rate for bananas is 15 t.p.h. per gang with ship's derrick and the labour was satisfactory. Accommodation ladder required.

Services: Fresh water, fresh provisions, repair facilities, machine shop, Airport, laundry services, bunker fuel oil, diesel oil, lubricating oils, doctor, hospital, groceries and meats.

SHIPMASTER'S REPORT: January 1979. Vieufort.

Pilotage: Not compulsory, but recommended. If required Pilot boards 0.5 miles S.W. of Mathurin Point (there is a strong N.W. current off Mathurin).

Restrictions: Vessel may enter and leave at any stage of the tide, day or night.

Max. Size: Max. LOA 520 ft.

Tugs: Tugs are not available and are not necessary for docking and undocking.

VHF: Not available.

Berthing: One berth only available. Distance from entrance to berth 0.5 miles. Nature of bottom at the berth is mud. All banana loading is carried out by the side doors. Vessels berth port side to the quay. A very high rate of loading is attained (100 t.p.h.) as the stevedores carry a bundle under each arm and upon their heads. There is no mechanised equipment for handling palletised cargoes also there is no storage space for palletised cargoes or breakbulk cargoes. No storage facilities or equipment for handling containers. Accommodation ladder required.

Services Available: Only fresh water, airport and doctor available (i.e. no fuel or provisions available).

AUTHORITY: St. Lucia Port Authority.

KINGSTOWN, St. Vincent: 13.09 N. 60.57 W.

(See Plan Book)

DOCUMENTS:

Customs:
2 copies Ship's Store List.
1 copy Crew Store List.
1 copy Crew List.
1 copy Passenger List.
1 copy List of Cargo not manifested.

Immigration:
2 copies Passenger List.
2 copies Crew List.

Port Officer:
1 copy Declaration of Health.
1 copy Passenger List.
1 copy Crew List.
2 copies Port Officer Return.

PILOTAGE: Not compulsory. Cable Agents 24 hours prior arrival order arrange Pilot. English-speaking Pilot boards at harbour entrance – about 2 miles from anchorage. By day Pilot vessel flies Pilot flag and by night signal lights.

ANCHORAGE: Well protected. Tourist vessels lie at anchor, between 15 and 20 fathoms, or at pier.

RESTRICTIONS: None. Vessels may arrive and/or sail any hour day or night.

HEALTH: Port Health Officer boards vessel at anchorage requires Bill of Health or Master's declaration, and one copy Passenger List. Vessel's own form of manifest accepted. Vaccination Certificates are not required to be shown and passengers and crew do not require inoculation. Passenger and crew muster, not required. Health Doctor requires letter signed by Ship's Doctor (if any) and certified by Master stating all passengers and crew in possession of

valid smallpox vaccination certificates. No persons allowed leave vessel before pratique granted and Immigration officials boarded vessel.
TUGS: Are not required for berthing and none are available in the port.
BERTHING: No tidal restrictions, no strong currents. Occasional on-shore South winds during August and September but only light winds. Rest of year off-shore winds. Mooring boats available for taking lines. No special moorings required. Jetty situated at S.E. corner of harbour and about 70 ft. out from beach. Bow and stern lines to landing stage. Landing stage in good condition and well lit. If vessel at anchorage and not at berth transit ashore by ship's motor launches only. Anchorage about 2 cables distant from quay.
FRESH WATER: Available.
TELEPHONE: May be connected on board if required, rental charge 4 dollars per day.
CUSTOMS/IMMIGRATION: Customs and Immigration officers board vessel at anchorage or quay. Vessel entered and cleared at Customs House by Agents. Ship's own form of manifest accepted by Customs and Immigration. On passenger vessels, ship's bar is sometimes sealed.
IDENTIFICATION CARDS: Not required for going ashore.
VISAS: Not required for crews or passengers, but nationals of foreign countries other than U.S.A. or Canada disembarking for permanent residence require Visas.
PROVISIONS: Limited quantities of provisions, fish, fruit and vegetables. Pasteurised cows' milk obtainable. Stocks of ice available.
CURRENCY: No special currency regulations in force and passengers permitted to take ashore any amount of U.S., Canadian or foreign currency. Currency exchanges at Banks or tourist bureaux, but Bank tellers do not board vessel to exchange currency. Local currency may be re-exchanged for U.S. dollars at local Tourist Bureau before departure. U.S. or Canadian currency accepted by stores, shops, restaurants and hotels.
SHIPMASTER'S REPORT: January 1979.
Pilotage: Not compulsory. Pilot boards 0.5 miles South of Fort Charlotte Light. A heavy swell may be experienced and vessel is always rolling.
Restrictions: Vessel may enter and leave at any stage of the tide, however, berthing is not recommended during hours of darkness. Unberthing may be carried out at any time.
Max. Size: LOA 550 ft. Max. draft approximately 30 ft.
VHF: Fort Charlotte on VHF Channel 16.
Berthing: One berth only available, vessels always dock port side to. Wharf is concrete with hard rubber fenders. There are storage facilities for breakbulk cargoes and palletised cargoes, there is also mechanised equipment for handling bananas. There is no equipment for handling containers nor is there storage space for containers. Loading rate for bananas 15 t.p.h. per gang using ship's derricks. Vessel's accommodation ladder required.
Facilities Available: Fresh water, fresh provisions, airport, laundry services, doctor, hospital, groceries and meats.
AUTHORITY: Port Manager, Kingstown Port Authority.

PORTSMOUTH, Dominica: 15.32 N. 61.29 W.

(See Plan Book)

Portsmouth is an anchorage port principally engaged in the export, by lighter, of bananas and the export of agricultural produce by small inter-island vessels.

Documentation required is as for "Roseau". Safe anchorage is available anywhere within the port with distance off dependent on the size of vessel. Pilotage is not compulsory and if required must be obtained at the Roseau Pilot station.

No alongside facilities (except those for lighters) exist and no cargo handling equipment is maintained.

A steel piled/concrete decked finger pier 230 ft. long, 40 ft. wide is planned for construction at Longhouse during 1978/79. This berth will have 12 ft. of water at the head. It is intended that the pier will provide lighterage berthing and accommodate inter-island sloops, schooners and motor vessels. Final planning of upland and equipment is yet to be undertaken.

All enquiries in the respect of the use of the port of Portsmouth should be addressed to the Port Authority, Roseau.
MEDICAL: A Cottage Hospital is available.
POLICE/AMBULANCE/FIRE: Police Tel. 5222, Ambulance Tel. 5237 (Hospital), Fire Tel. 5215, Custom House Tel. 5255.

SHIPMASTER'S REPORT: January 1979.
Pilotage: Not compulsory or required.
Restrictions: Vessels may enter or leave at any stage of the tide during day or night.
Tugs: None available.
VHF: Not available.
Anchorage: Vessel anchored with the lighter jetty bearing 100°, distance 4 cables. Depth of water 70 ft. Cargo is delivered to the vessel by small lighters which are towed from a timber and steel jetty owned by Geest Line. Loading of bananas is carried out through side doors only. The quality of work was good.
Services Available: Doctor and airport (fresh water, fuel and other services are not available).

ROSEAU, Dominica: 15.17 N. 61.24 W.

(See Plan Book)

PORT LIMITS:
15° 19′ 00″ N., 61° 24′ 29″ W.;
15° 21′ 00″ N., 61° 24′ 29″ W.;
15° 21′ 00″ N., 61° 23′ 09″ W.
DOCUMENTS: Port Authority requires before commencement of discharge, 2 copies of the vessel's manifest, and 1 stowage plan or hatch block sheet. Masters are advised that these should be airmailed ahead of the arrival. On arrival, documents required are:
Port Authority:
Ship's Register to sight.
International Health Declaration.
1 Crew List.
1 Passenger List.
1 Hazardous Cargo List.
Customs:
Clearance from last port.
1 Stores List.
2 Personal Effects Declaration.
1 Manifest.
1 Crew List.
1 Passenger List.
Immigration:
1 Crew List.
1 Passenger List.
PILOTAGE: Pilotage is compulsory for berthing all vessels in excess of 100 g.r.t. Pilotage is available for anchorage on request. Pilots will board in approx. 15° 17′ 54″ N. 61° 24′ 50″ W. The pilot boat will display International code "H" by day and a white light over red light by night. Requests for Pilots should be made 24 hours in advance either through the vessel's Agent or by cable to "Domport". Vessels may contact the Port Authority through Dominica Port Radio on VHF Channel 6 from 0800-1600 hrs., and for 2 hours in advance of the vessel's ETA.
ANCHORAGE: A restricted area exists in Woodbridge Bay between:
15° 19′ 00″ N., 61° 24′ 15″ W.,
15° 18′ 00″ N., 61° 24′ 15″ W.,
15° 18′ 00″ N., 61° 24′ 00″ W.
and vessels may not anchor therein, except under Port Manager's instructions. Anchorage may be taken South of this area and in Roseau Roadstead 1.5 – 2 cables offshore in 15 – 30 fathoms depending on the vessel's size. All anchorages are steep-to and care should be exercised so as not to drag off the bank when anchoring.
MAX. SIZE: See "Berthing".
HEALTH: International declaration of Health. In addition any death, fever or suspected contagious disease should be notified in advance to Agents or Port Authority by cable or radio.
RADIO: See "Pilotage".
TUGS: None.
BERTHING: Woodbridge Bay Ocean Berth Length 500 ft., min. depth 36 ft. MLWOST.

Schooner berth 120 ft. with a depth alongside of 9 ft. (inshore) to 36 ft.

Roseau Jetty, Length 93 ft. min. depth 18 ft.
STEVEDORES: Arranged by vessel's Agents.
CARGO HANDLING FACILITIES:

Mechanised Cargo Handling: Breakbulk cargo is handled palletised on ships/shippers/port pallets. Adequate forklift trucks, trailers, and tractors are available to work all berths, Small inter-island vessels can be discharged by 5-ton mobile cranes (2). Containers up to 18 d.w.t. can be handled ashore if placed on port trailers by ship's gear. Ro-Ro barges capable of trimming to ramp height of +10 ft. are accommodated on the South end of Woodbridge Bay Pier.

A ramp with 10 ft. water at MLWOST is planned at the Dominica Mining Co. facility 1 mile North of Woodbridge Bay. This could only be used by special arrangement and prospective users area are advised to contact the Authority well in advance.

Tankers/Bulk cement carriers: Petroleum products are presently handled at 5 different anchorages on the west coast.

L.P.G. Woodbridge Bay (2) max. draft 12 ft. floating hose from vessel.

Mogas – Gasoil (Dieselene), Kerosene, Sprayoils: Rockaway (2), 1 mile North of Woodbridge Bay, draft 18 ft. 800/900 ft. floating hose from ship.

Boiler Fuel (Bunker C): Belfast, 2 miles North of Rockaway, max. draft. 18 ft. (up to 25 ft., if vessel equipped for stern discharge) 4-in. submarine line.

Bulk Edible Oils and Soap Chemicals: Belfast max. draft 14 ft., 4-in. floating hose (200 ft.) from shore.

The above are single anchor, stern-to berths with stern lines to shore posts. Vessels should have at least 4 ropes available aft and provision to bend 2 lines together.

Bulk Cement: Rockaway, mooring to buoys off Dominica Mining Co. jetty (mooring shackles required). this berth is for specialised cement carriers only, max. draft 15 ft.

Quarry Products: Rockaway – Ro-Ro ramp. Specialised vessels only.

The above are private facilities but pilotage is available. In the case of Woodbridge Bay (L.P.G.) pilotage is compulsory. Tankers in their ETA advice should include their cargo by products and their draft.

MEDICAL: One Government General Hospital, One Private group Medical Clinic and One Private Dental Clinic are available.

On board visits by a Doctor Can be arranged.

Where possible advance notice should be given.

DENSITY: Approx. 1025.

FRESH WATER: Available alongside all berths at a cost of EC $12.00 for 1,000 gals.

FUEL: Dieselene (Gas oil) available in limited quantities ex-tank wagon at all berths. Other grades not available.

GANGWAY/DECK WATCHMEN: Available if required.

OPENING/CLOSING HATCHES: Beam and board hatches, crew or stevedores; Ship's option. Patent Hatches; ship's crew.

CERTIFICATES: Previous port clearance; ship's register, to sight.

CUSTOMS ALLOWANCE: 200 cigarettes, or 0.5 lb. tobacco or 25 cigars, 26 ounces of spirits per crew member.

IDENTIFICATION: Dock passes for crew members will be issued through the vessel's Agents.

CONSULS: (Or Consular Agents).

		Business	*Residence*
France	C. A. Butler	Tel. 2033	Tel. 1146
Netherlands	W. A. Astaphan	3221	2524
Belgium	Achille L. Pinard	2781	2756

REPAIRS: Minor and emergency repairs can be arranged. Engines and deck gear cannot be put out of service without permission of the Port Manager.

REPATRIATION: Limited inter-island flight capacity to nearest international airports – Guadeloupe, Martinique, Antigua, Barbados.

AIRPORT: Melville Hall 37 miles. Inter-island services only.

TIME: GMT minus 4 hours.

HOLIDAYS: New Year's Day, Carnival (Mardi Gras) 2 days. Good Friday, Easter Monday, Labour Day, Queen's Birthday, Whit Monday, August Monday, National Day (Nov. 3rd–4th), Union Conference Day (A Sunday in November), Christmas Day, Boxing Day.

Minimum working: Can be arranged on these days, but it is not advised over the Carnival or National Day Holidays.

POLICE/AMBULANCE/FIRE: Police Tel. 2222 or call on 2182 kHz., Fire Tel. 2888, Ambulance Tel. 2321.

At anchor or away from a telephone, blow 3 short and 1 prolonged blast at frequent intervals until acknowledged on VHF Channel 16 or by lamp.

TELEPHONES: On board service can be provided at the Ocean Wharf, Woodbridge Bay.

SERVICES: Assistance can be given for emergency repairs to electronic equipment, compass adjusting and D/F calibration subject to advance notice. Provisions can be obtained, but advance notice should be given especially for fruit and vegetables of high quality.

SHORE LEAVE: After inward clearance, there are no restrictions on shore leave. Masters are advised to note that immigration law holds the vessel/owner/agent, financially reponsible for any crew member or intransit passenger left behind (for whatever cause). Vessel's having no accredited Agent will be required to satisfy Immigration Authorities before outward clearance is granted.

SHIPMASTER'S REPORT: January 1979.

Pilotage: Compulsory. Pilot boards 0.5 miles off the quay and requires two hours notice of vessel's arrival.

Restrictions: Vessel is able to enter or leave at any stage of the tide day or night.

Max. Size: Max. LOA 550 ft.

Tugs: Not available. Vessels able to dock and undock without the aid of tugs.

VHF: Channel 16.

Berthing: One berth only available with wooden fenders. A heavy swell may be experienced whilst alongside berth as it is very exposed. Loading rate for bananas is 16 t.p.h. per gang. There is ample mechanised equipment for loading palletised cargoes. There is also storage space for breakbulk and palletised cargoes. The quality of the labour was good. There is no equipment for handling containers and there is no storage space for containers. Accommodation ladder required.

Services Available: Fresh water, fresh provisions, airport, hospital and doctor (no fuel, repair facilities or other services available).

AUTHORITY: Dominica Port Authority.

ST. GEORGE'S, Grenada: 12.02 N. 61.46 W.

DOCUMENTS:

Health Authority: Health Declaration.

Harbour Master: 1 Crew List, 1 Passenger List.

Customs: Stores List, Crew Declaration, Crew List, Passenger List, Clearance from last port.

Immigration: 2 Crew Lists, 2 Passenger Lists.

PILOTAGE: If Pilot is required at daybreak order should be placed by 1600 hrs. the day before.

ANCHORAGE: Vessels anchor in position 12° 02' N., 61° 46' W.

BERTHING: Length of berth 850 ft. Depth alongside 28 ft. at the Southern end and 21 ft. at the Northern end. Berth owned by the Government of Grenada.

STEVEDORES: Available.

FRESH WATER: Available.

FUEL: This can be arranged with sufficient notice.

TELEPHONES: Telephones can be arranged through the local Agent.

MEDICAL: Doctor and general hospital available.

SHIPMASTER'S REPORT: January 1979.

Pilotage: Pilotage not compulsory but recommended. Pilot boards off the channel green buoy.

Restrictions: It is not recommended to enter in hours of darkness, however, it is possible to unberth. Vessels may enter and leave at any stage of the tide.

Max. Size: Max. LOA for single screw vessel is 520 ft.

Tugs: Tugs are not available and they are not required for docking and undocking.

VHF: Not available.

Berthing: There is only one quay and vessels usually dock port side to. Berthing in hours of darkness is not recommended as there is a sharp bend in the approach channel. Loading rate for bananas is 10 t.p.h. per gang with ships derricks. There are no facilities for loading palletised cargoes, however, there is adequate storage space for both breakbulk cargo and palletised cargoes. There is no equipment or storage space for containers. Accommodation ladder required.

Fresh Water: Available.

Medical: Doctor and hospital available.

Airport: Available.

Services: Laundry services and provisions available.

NOTES

Please also advise Shipping Guides Ltd.

Yemen Arab Republic

HODEIDAH: 14.48 N. 42.55 E.

FLAG: It is essential that from the time they enter Yemen territorial waters all vessels fly the Yemen Arab Republic flag and this should be flown continuously until they leave these waters on sailing. Failure to observe this courtesy may result in a heavy penalty. The design of the flag is red, white and black horizontal strips of equal size with green star in centre of white strip.

DOCUMENTS: On arrival 8 copies of Manifests of cargo for discharge are required and each must be endorsed with the word *Correct* by the *Customs Authorities* at the Port of Loading. It is advisable that at least 2 of the 8 copies of manifests on board the ship should be freighted copies, otherwise 2 additional copies, showing freight details should be airmailed to Hodeidah separately to arrive in advance of the vessel. The Master should also be in possession of 1 copy of each Bill of Lading and certificate to show vessel is not blacklisted.

PILOTAGE: Pilotage is compulsory and as the entrance of the Channel giving access to the Port cannot be observed from the port area itself it is essential that accurate ETA's be given to Hodship Hodeidah (the Agent) in order to avoid delays waiting for a Pilot.

Vessels will be piloted down a dredged channel of about 8 miles in length. The channel, which is buoyed with black starboard and red port buoys, is 7.5 m. deep and 100 m. wide. – *The buoys are not at present lit and therefore entrance and exit from the harbour can only take place during daylight hours.* It is understood that in due course illumination of buoys and leading marks will be carried out and night movement possible.

ANCHORAGE: Masters are also recommended to ensure that on arrival they anchor off the entrance to the new port to await the Pilot and do not anchor off the old port opposite the town some 5 miles to the South and which is still shown as being the Port of Hodeidah on some charts. Vessels anchoring in the wrong area may suffer some delay before they can be contacted and asked to proceed to the correct area. Masters should be advised to anchor at the outer anchorage in the following position: 14° 55′ N., 42° 54′ E.

MAX. SIZE: Max. draft alongside 23 ft.

HEALTH: All members of the crew must be vaccinated against yellow fever, smallpox and cholera otherwise permission will not be given to disembark.

RADIO: Masters should also ensure that a radio watch is kept to receive calls from the Port Authorities. The Hodeidah Radio station is operative between 0600 and 1800 hrs. daily, the call sign is: 4WD or 4WD3 (short).

TUGS: 1 tug of 450 h.p. Pilot launch 250 h.p. also available to assist.

BERTHING: The quay is 370 m. in length with 3 berths, the first 70 m. long, depth 6 m., the second and third are of 150 m. length and 8.5 m. depth. *Officially, ships berthing are restricted in length to 140 m. and to a max. draft of 23 ft., but vessels up to 150 m. have berthed. For such vessels prior advice is required.*

The quay is concrete construction and is well founded, vessels being secured to bollards in the normal manner. Use of rat-guards is recommended. The quay is equipped with 3 electric cranes described as having a max. capacity of 5 tons. At present only 2 of these cranes can be operated simultaneously owing to insufficiency of current.

There is also a dolphin berth for discharging of petroleum products, which is connected by submarine pipes to storage tanks near the port area. The depth alongside is 6 m.

STEVEDORES: All labour is provided by Agent's representative including winchmen and tally clerks, but winchmen are provided entirely at ships' risk.

Rates of discharge vary but are quite satisfactory and with bagged cargo the average obtained is 15 tons per hatch per hour. Night work is possible.

It is normal for labour working on board to request drinking water to be supplied. Whilst this may be unusual Masters are advised to comply, as otherwise slow working or perhaps even stoppages may result.

Vessels are expected to supply food on board to cargo-supervisors, foreman, and tally clerks. It may be left to Master's discretion whether this is supplied, but if not the Agency will have to supply same and the cost will be debited to the vessels.

WORKING HOURS: Normally from 0600 hrs. to 1400 hrs. and again from 1700 hrs. to midnight. Additional work outside these hours, including after midnight can usually be arranged if necessary, although this cannot be guaranteed. Any work after midnight is overtime.

MEDICAL: Hospitals at Hodeidah and Sanaa-Taiz.

FRESH WATER: Available; pumping rate 10–15 t.p.h.

FUEL: Available from Yemen Petroleum.

CONSULS: (and Embassies):

Algeria
China
Egypt
E. Germany
Ethiopia
France
Italy
Iraq
Korea
Kuwait
Lebanon
Libya
Saudi Arabia
Syria
United Kingdom
U.S.A.
U.S.S.R.
W. Germany
Yugoslavia

REPAIRS: Light repairs can be carried out.

AIRPORT: Flights from Cairo to Hodeidah, Asmara to Taiz and Jeddah to Sanaa. International airport under construction.

TIME: GMT plus 3 hours.

HOLIDAYS: 1st January Eid Al-Adha Wagfa; 26–28th January Eid Al-Adha; 16th February Islamic New Year; 5th May Birthday of the Prophet; 26–30th September Proclamation of the Republic; 5–8th November Eid Alfitr.

Friday is the weekly day of rest, Sunday being a normal working day. There are also a number of Moslem holidays, the date being based on the Moslem calendar, and which therefore vary from year to year on the Christian calendar. Work is usually possible on such days but cannot be guaranteed. Holidays for special occasions are also liable to be declared at short notice. Friday if worked 25% and public holidays 100% surcharge. During the Moslem fast period of Ramadhan lasting about twenty eight days, which again varies from year to year, work is slower.

SHORE-LEAVE: Allowed. The Master should prepare a list of persons wishing to go ashore as Agent has to issue I.D. cards.

REGULATIONS: It is strictly forbidden for crew and passengers on board to take photographs while a vessel is in the harbour approaches or secured to the jetty in harbour.

Any vessel which permits oil and/or water to be discharged into the harbour will be liable to a minimum penalty of US $100.

AUTHORITY: Hodeidah Port Authority.

MOCKA: 13.17 N. 43.10 E.

Mocka is a small port with equipment for loading and unloading.

BERTHING: 100 m. of quay for small craft up to 7 ft. draft. Vessels of up to 28 ft. draft may anchor in open roads 1.5 km. from pier. Cargo is discharged into lighters with total capacity of over 2,000 tons. It is inadvisable to stow cargo in No. 1 hatch during windy season September to May.

TUGS: 2 available.

FUEL: Not available.

TIME: GMT plus 3 hrs.

NOTES

Please also advise Shipping Guides Ltd.

Yemen, People's Democractic Republic of

ADEN, (including Little Aden): 12.48 N. 44.54 E.

DOCUMENTS:
3 Crew Lists for Ship's Agent, Police and Immigration.
3 Passenger lists for Ship's Agent, Police and Immigration.
1 Health Form to be shown to Pilot on boarding and handed to Ship's Agent.
Manifests, Bills of Lading if landing cargo only.
Ship's Register to be sighted by Pilot.
Arrival Declaration to be filled in by Ship's Agent after arrival.
Dangerous material declaration to be handed to Pilot on boarding.

PILOTAGE: Compulsory for all vessels proceeding to oil berths or over 100 tons net. To call Pilot fly International Code Flag "G" or red/white/red lights at night. Call "Harbour Control" on VHF Channel 16, or R/T 2182 kc/s., or Signal Station by lamp. 48 hours notice of ETA with draft to Harbour Office.

Pilot boat will meet ship at the Fairway Buoy in all weathers. Pilot boat is 50 ft. launch painted red, flying Pilot flag by day or white/red lights at night. Pilot will board on port side of ship by Pilot ladder. Vessels waiting Pilot can anchor anywhere in Outer Harbour except in a Prohibited Area of 2,000 ft. from Fairway Buoy.

ANCHORAGES: Ample anchorage area available with depths from 18 to 54 ft.

(*a*) Anywhere North of Fairway Buoy clear of Main and Little Aden Channels and clear of Prohibited Area mentioned above.

(*b*) Deep water anchorage anywhere to S.W. of Fairway Buoy clear of Little Aden Channel and Prohibited Area mentioned above.

MAX. SIZE:
Aden:

(*a*) Max. length 900 ft., breadth no restriction, depth 38 ft. at datum for vessels taking bunkers from BP, Shell or Gulf.

(*b*) Vessels taking bunkers from Mobil, Caltex, Stanvac and Esso, max. length restricted to tankers of 750 ft., and passenger ships of 600 ft., breadth no restriction, depth 39 ft. at datum.

(*c*) Larger vessels can be considered on application to the Port Officer. Longest vessel to enter 940 ft.

Little Aden Refinery:
Max. length 760 ft., breadth no restriction, depth 40 ft. at datum and max. deadweight 55,000 tons.

Note: In both harbours vessels manoeuvring require 2 ft. water under keel, and vessels of draft 37 ft. and above require 4 ft. water under keel.

Ballast draft for Tankers: All tankers when manoeuvring within the port shall be ballasted properly to a mean ballast draft which shall not be less than half the Summer draft and the trim by the stern not exceeding 6 ft. These figures are the minimum for normal conditions and may be increased when conditions necessitate at the discretion of the Pilot.

HEALTH: Vessels requiring pratique fly International Code Signals or 3 red lights at night.

Control of quarantinable and infectious diseases is direct responsibility of Port Health Officer. All passengers from infected local areas except children under age of one year are required to have valid international certificate of vaccination or revaccination against yellow fever and cholera. Valid certificates of vaccination against smallpox are required of arrivals from all countries.

RADIO: All ships landing passengers are boarded by Assistant Port Health Officer unless radio pratique has been given. Pratique may be obtained by wirelessing Port Health Authorities no earlier than 12 hours and no later than 4 hours before arrival, in accordance with international procedure. All landing passengers medically inspected and vaccination certificates checked on board before free pratique granted. Ships having infectious diseases on board are also boarded; after examining the case and taking any necessary precautions the Assistant Port Health Officer grants restricted pratique. Ships also inspected for issuing deratting exemption certificates. Deratting carried out when necessary and deratting certificate issued.

Cable and Wireless (Mid East) Ltd.: Mercury House, Ras Boradi (Tel. 22223/5).

Wireless telegraph:	*GMT*	*kHz*
Medium wave		
Working frequency		476
24 hour watch on international calling and distress frequency		500
High frequency	0500–0700	
	1100–1200	
	1630–1800	
	1830–1930	
	2130–2200	8710
	0900–1100	
	1300–1500	13060.5
	0700–0800	17175.2
Radio telephone (including spoken telegrams)		
Working frequencies		2595 & 3628
24 hour watch on international calling and distress frequency		2182
Radio telephone circuits set up on request at times shown	0400–0500	
	1000–1100	8805.6 &
	1600–1700	4409.4

VHF: 24-hour watch on Hague Plan VHF Channel 16 with duplex working on Channel 26.

TUGS: Tugs for both harbours normally join just outside Breakwater. Ships' ropes always used in Aden harbour, tugs' wires in Little Aden.

BERTHING: (also see "Tankers"): 24-hour service at all berths.

Berth		*Type*	*Normal maximum length of ship in feet*	*Datum depth in feet*
1 (a)		2 buoys	350	30
1 (b)		2 buoys	350	30
1 In		Anchors & buoy	275	30
2 Out		Anchors & buoy	550	38
2 In		2 buoys	600	38
3 In		Anchors & buoy	700	38
4 Out	A	Anchor & 3 buoys (oil)	650	36
4 In	B	Anchor & 3 buoys (oil)	750	40
5 Out	R	Anchor & 3 buoys (oil)	630	37
7 Out	S	Anchor & 3 buoys (oil)	630	38
8 Out	E	Anchor & 3 buoys (oil)	580	36
8 In	F	Anchor & 3 buoys (oil)	600	36
9 Out		Anchors & buoy	900	41
9 In		Anchors & buoy	550	36
10 Out	U	Anchor & 3 buoys (oil)	600	36
10 In	V	Anchor & 3 buoys (oil)	600	36
11 Out	G	Anchor & 3 buoys (oil)	600	30
11 In	H	Anchor & 3 buoys (oil)	530	28
13 Out		Anchors & buoy	550	28
13 In		Anchors & buoy	450	30
14 Out		Anchors & buoy	350	18
14 In		Anchors & buoy	350	18
15 Out		Anchors & buoy	350	18
15 In		Anchors & buoy	350	18
Dolphin Berths				
6 Out	C	Dolphin & breast buoys (oil)	900	39
6 In		Dolphin & breast buoys (oil)	800	38
7 In	T	Dolphin & breast buoys (oil)	750	39

The capital letters in column one denote alternative designation of mooring buoys/dolphins.

Free zone. Initial Stage 525,420 sq. ft. open space and 162,000 sq. ft. covered space. Import and export industrial facilities. No restrictions, no taxes. Transhipment storage Free for unlimited period.

STEVEDORES: ETA advice to Ship's Agents at least 48 hours before arrival.

MEDICAL: Advance notice for medical attention not normally required except for serious cases requiring doctor's attendance on board, or ambulance cases. Vaccination certificate required for landing. Hospital facilities available.

TANKERS: Tankers carrying dangerous petroleum (flash point below 73° F) and those not gas free cannot enter Aden Harbour during hours of darkness. They can enter Little Aden day or night. Slop (residue) discharge facilities available at Little Aden. 4 tanker berths for discharge/loading at Little Aden with max. datum depth of 40 ft.

Berthing at Oil harbour: Functions of Oil Harbour Little Aden to receive crude oil in bulk for oil refinery and to export refined petroleum products. Vessels carrying cargo for refinery other than oil discharge at Inner Harbour.

Oil harbour has finger jetty and 2 T-head jetties which provide berths for 4 tankers. Tankers of up to 55,000 tons Summer deadweight can be accommodated.

Berth	*Type*	*Normal maximum length of ship in feet*	*Datum depth in in feet*
1	Dolphin & mooring dolphins	750	40
2	Dolphin & mooring dolphins	750	40
3	Dolphin & mooring dolphins	750	40
4	Dolphin & mooring dolphins	750	40

DENSITY: Salt water at all times.

FRESH WATER: Ample available, delivered by barge in Aden at about 50 t.p.h. Ordinary water in Little Aden supplied by pipe-line at about 40 t.p.h. and condensate at about 2 t.p.h.

FUEL:

(*A*) B.P., Shell Gulf.
Marine fuel 2500 sec., 1000 sec., 600 sec., 200 sec.
Diesel oil and gas oil.

(*b*) Caltex, Mobil, Esso, Stanvac.
Marine fuel – all grades below 3,500 sec.
Diesel oil and gas oil.
All supplies done on a Nomination basis through the Company's Head Offices, with the vessel giving at least 48 hours notice to Aden.

FIRE PRECAUTIONS: As per the Refinery regulations. Tug wires to be rigged.

GANGWAY/DECK WATCHMEN: It is recommended watchmen are employed; they can be supplied by Ship's Agent.

OPENING/CLOSING HATCHES: Normally carried out by stevedores, derrick-topping by ship's crew. Vessels not to move in harbour with beams off.

CUSTOMS ALLOWANCE: Tobacco/Wine, Spirit allowance. No restriction at the moment. Bonded stores not allowed to be supplied more than 1 hour before ship sails.

IDENTIFICATION CARDS: Not required at the moment.

CONSULS:

Embassies	Consuls
United Kingdom	Belgium
U.S.S.R.	Denmark
Egypt	Netherlands
Somalia	Norway
Italy	Sweden
India	Portugal
Iraq	Greece
Spain	France
Pakistan	Germany (F.R.)
Yugoslavia	
Germany (D.R.)	
Ethiopia	
China	
Libya	
Saudi Arabia	
Vietnam	
Cuba	
P.R.C.	
Ch.SR.	
P.R.B.	
K.D.R.	

REPAIRS: Workshops are equipped to carry out: Boiler repairs; Plating and sheet metal work; Galvanising work/moulding work; Welding and blacksmith's work; Main and auxiliary machinery repairs; Carpentry and joinery work; Electrical and plumbing work; Refrigeration repairs; painting, cleaning and chipping. Repairs afloat to vessels up to 80,000 tons are undertaken; repairs to the largest vessels carried out mostly in Outer Harbour.

Wireless engineering section with fully qualified personnel giving round-the-clock service of repairs and maintenance of radar and wireless equipment.

DRY DOCK: 1 sideways slipway taking 1,500 tons and floating dock lifting capacity 4,500 tons. Length 137 m., breadth 31 m. Max. draft 6.0 m.

REPATRIATION: Arranged through Ship's Agent and Immigration.

AIRPORT: About 5 miles from port. Flights to U.K. via Beirut (Middle East Airlines), Khartoum (Sudan Air Lines).

TIME: GMT plus 3 hours. No alteration of clocks.

HOLIDAYS: Most holidays are religious which have moveable dates. National holidays are 14th October and 30th November. Cargo work usually carried out during all holidays. Friday is a public weekend holiday.

POLICE/AMBULANCE/FIRE: Ambulance Crater 53232; Harbour Police 22851; Port Health 22626/7; Fire 22222.

TELEPHONES: No connection to ships but link calls can be made on VHF through Yemen Communications using Channel 16 to call and working on Channel 26. Some Agents have private VHF channels.

GENERAL: Outer harbour contains ample anchorage area for vessels requiring datum depths up to 54 ft. Inner harbour approached by 2.7 mile dog-leg channel, dredged to 35 ft., from Fairway buoy in Outer Harbour where Pilots board. Inner harbour protected by breakwater at Steamer Point and by rubble mound. It provides 24 buoy or anchor-and-buoy berths, including 13 with oil bunkering facilities. Majority of these berths have a datum depth of 30 or 38 ft., with max. length of ship ranging from 275 to 750 ft. In addition 3 dolphin berths, with bunkering facilities, of 39 ft. datum depth and normally accommodating ships of 750–900 ft. max. length; vessels of greater length can be accommodated with the approval of the Port Officer. Quays and wharves cater for shallower-draft vessels and lighters.

Oil harbour, serving refinery at Little Aden, reached by 38 ft. channel from Fairway buoy, provides facilities for tankers of up to 750 ft. All berths and anchorages are under the jurisdiction of the Port Officer.

SHORE LEAVE: *Regulations:* In accordance with Art. 8 of the Immigration Rule No. 28 of the year 1969, all crew members coming ashore will be excused from obtaining visa provided they surrender their passports to the Immigration Officer-in-Charge. These passports will be given back to the holders before they return to their particular vessels. Any crew member unable to comply with these instructions will not be permitted to visit the town.

Ships' crew are not allowed to stay ashore after 0300 hrs., unless permission is granted for longer period.

REGULATIONS: Vessels must fly the National flag of P.D.R.Y. at foremast. No movement of "dangerous petroleum" at night. Vessels must vacate oil berths on completion of bunkering. Main engines must not be immobilised in an oil berth. Sufficient crew must remain aboard vessel at all times to move her.

SHIPMASTER'S REPORT: 1976

Documents:

Pilot: Sights Ship's Register to check tonnages.

Customs: 2 Crew Lists; 1 Bond List.

Immigration: 2 Crew Lists.

Doctor: 1 Health Form; 1 Vaccination List (smallpox).

Note: Crew List should have consecutive numbers as well as Agreement numbers.

Agents:

2 Crew Lists; Arrival information sheet; Statement of Owners full address also Cable address; 2 Arrival declaration for Yemen Ports Corporation; 2 Aden Port Log; 1 Charges sheet for Mail; 1 Sailing information sheet; 1 Currency refund sheet.

Agent brings these Forms on board and will assist with filling in the information.

Communications: It was found impossible to make Radio Contact with Aden prior to 5 days before arrival. Best time seems to be after Aden sends its Traffic List. VHF contact was made at 12 miles as the hills around Aden appear to blanket signals when further away. Channels 16 or 12.

Approach: This is straight forward. The B.A. Charts appear to be well up-to-date. The Fairway Buoy is easily seen at 8 miles. Pilot boards here. Pilot ladder required. Authorities will not allow the accommodation ladder to be used.

Mooring: There was a trainee Pilot with both the inward and outward Pilot.

Ship was swung using starboard anchor and 1 tug aft. Berthed at No. 4 Berth. Forward: 3 ropes to buoy on inside plus starboard anchor 5 shackes. Aft: 1 rope from port quarter and 1 from starboard quarter taken to outside buoy, then 2 ropes, 1 from each quarter taken to inside buoy. Ship then hove to be centred between the 2 after mooring buoys. When ship in position oil pipe-line, on floats is towed alongside.

Visit: Agent boarded with Doctor. At first Doctor was insisting all had to have Cholera vaccinations but this seems to be so that he can charge the fees and is not really necessary. Immigration and Customs boarded. All pleasant and helpful. Bond was sealed.

Port Facilities: 2 fairly powerful tugs. Numerous mooring boats, 1 floating crane seen but as to lift capacity this was not ascertained. Port is run by The Yemen Ports Corporation. Like the Agency it is State owned.

Watchmen: Agents automatically provide 2 watchmen. Seemed to be alert.

Regulations: Masters are requested to assist the Port Authority by not allowing Bumboatmen or fishermen to board without written permission. The Port Authority advises Masters to be most careful if they do issue written permission. There were no bumboats about and no one seeked permission to come aboard to do business.

One half hour prior to sailing the Pilot signal red-white-red in a vertical line or "G" to be hoisted also call Port Control on VHF 16.

Use of ship's whistles or sirens is very controlled.

Bunkering: Ship's crane used to hoist pipe-line aboard. The bunkering operation went smoothly and the Oil people seemed co-operative.

Walport Film Exchange: Agents were cabled but it is necessary for an Officer to go with the Agent to make the exchange.

Mail: Mail posted in London on 22nd March or 23rd March was stamped as having arrived Aden 28th or 29th March.

General: It would seem that the Port Authority, State, etc., are very keen to build up a thriving Port. It would also seem that they endeavour to give a good efficient service. I gather there is a special duty free shop ashore for the purchase of souvenirs, goods, etc.

AUTHORITY: Director General, Port of Aden Authority.

NOTES

Please also advise Shipping Guides Ltd.

Yugoslavia

BAR: 42.05 N., 19.03 E. (See Plan Book)

DOCUMENTS/HEALTH: General Declaration, Health Declaration, Crew Lists and Passenger Lists.

PILOTAGE: Advance notice 24 hours through ships Agent. Pilot boat blue hull, white deck house, with letter "P" on each side. Pilot boards off West Breakwater.

ANCHORAGE: Safe anchorage in about 57 m. off West Breakwater. Anchoring not allowed nearer then 0.5 mile off Breakwater.

RESTRICTION: Vessels enter/leave port by day and night. Tankers allowed only during daylight. Depth entrance 14 m..

MAX. SIZE: Fully loaded vessels up to 14 m. draft.

RADIO: Bar-Radio, call sign YUW, 500 kc/s. and 447 kc/s. Radio telephony on 2182 kc/s on 2 meters band and on Channel 16.

Pilots/Agents can be contacted through Bar-Radio on VHF.

TUGS: Available.

BERTHING: Berth assigned at Agent's request or Receiver's/Shipper's, both for liners or tramps, at the daily meeting of the Harbour Board.

STEVEDORES: The Port Enterprise "Luka Bar" is the sole stevedoring company. Work is done in 2 shifts: first 0600–1400 hrs., second 1400–2200 hrs. Third shift can be ordered at daily meeting, paid as overtime.

MEDICAL: Medical care available at Medical Centre at Bar.

TANKERS: New oil berth can accommodate tankers up to 80,000 d.w.t., draft limit 14 m. Bunkers from local bunker station. Tank cleaning, pumping of slops and degassing not permitted in port.

Tankers must be ready to leave port at 30 minutes notice, at any time and at request of Port Authorities.

CARGO-HANDLING FACILITIES: Available for all kinds of general cargo, containers, pallets, Ro-Ro. bulk, fuel oil and chemical cargoes. Regular passenger service to Italy and from May – October to Greece.

DEVELOPMENTS: See "Plan".

FRESH WATER: Available from hydrants on quay.

DENSITY: Sea water average Salinity.

FUEL: Can be obtained from local bunker station. All grades available. A fuel barge may be available in the near future.

GANGWAY/DECK WATCHMEN: Available at Captain's request.

OPENING/CLOSING HATCHES: Normally performed by crew, or as per Charter Party.

CARGO GEAR: *Mobile Shore Cranes:* 6×5/6 tons, 3×3 tons, 3×8 tons. Fork-lifts capable of handling containers, Vacuvators, 3 cranes for bulk cargoes. 1×40 ton container crane. If not agreed in C/P, loading and discharging is by shore cranes.

CUSTOMS ALLOWANCE: About 40 cigarettes and reasonable amount wine/spirits per man per day.

IDENTIFICATION CARDS: Shore passes issued by local Police.

SHORE LEAVE: Allowed.

CONSULS: Same as "Rijeka".

REPAIRS/DRY DOCKS: Dry Docks at Shipyard "Veljko Vlahovic', Bijela 36 miles from Port of Bar, capacity of about 130,000 d.w.t. and 35,000 d.w.t., available for all types of deck and engine repairs. Minor damage can be done while loading/discharging.

REPATRIATION: From Bar by bus, train (International Lines), and ship. From Airports Tivat, Titograd and Dubrovnik by plane.

TIME: Central European Time, GMT plus 1 hour. No daylight saving.

SERVICES: At nearby town of Tivat is representative of Yugoslav Register of Shipping, and compass adjuster. Other services at Captain's request.

HOLIDAYS: January 1st and 2nd, May 1st and 2nd, July 4th and 13th, November 29th and 30th. Work can be arranged on Sundays and 2nd day of two-day holiday.

POLICE/AMBULANCE/FIRE: Police Tel. 92; Ambulance Tel. 94: Fire Tel. 93.

AUTHORITY: Lucka Kapetanija.

AGENT: Jadroagent – Bar. Topolica b.b. P.O. Box 10 81350 Bar. Cable: Jadroagent Bar. Telex: 63141 yu jadrag.

DUBROVNIK (Gruz Harbour): 42.38 N. 18.07 E.

DOCUMENTS/HEALTH/HOLIDAYS: Same as "Rijeka".

PILOTAGE: Compulsory. Pilot boards at a point situated approximately in centre of triangle formed by Kolocep Island, Daska Island and Grebeni Rocks.

ANCHORAGE: In about 22 fathoms in channel between Daksa Island and mainland. This anchorage is exposed to strong N.N.E. winds in Winter time.

RESTRICTIONS: Only port of Gruz is open to commercial traffic, the old port of Dubrovnik (within the city walls) can accommodate only yachts and small craft drawing under 9 ft.

MAX. SIZE: Max. length 230 m., max. draft 32 ft., no limits on beam.

RADIO: Call sign YUX, working on 500 kc/s. and 447 kc/s., from 0800 to 1100 hrs. and 1600 to 1900 hrs.

TUGS: No permanently stationed tug boats, but can be ordered when necessary from other ports.

BERTHING: Berths for 5 ocean going vessels. Six cranes from 1, 5 to 25 tons lifting capacity.

CARGO HANDLING FACILITIES: The port handles some bulk cargoes (grain and bauxite) occasionally and in small quantities but is not specially equipped for handling these and other cargoes.

STEVEDORES: One State stevedoring company.

MEDICAL: General hospital and medical facilities available.

FRESH WATER: Available from hydrants on quay.

FUEL: Not available. Only oil for diesel engines in limited quantities. Heavy fuel can be delivered by coastal tankers from Split.

GANGWAY/DECK WATCHMEN: Available.

OPENING/CLOSING HATCHES: If not performed by crew, stevedores.

CUSTOMS ALLOWANCE: About 40 cigarettes and limited amount wine/spirits per man per day.

CARGO GEAR: Although operations are performed usually with shore cranes ship must have efficient cargo gear and relative certificates.

IDENTIFICATION CARDS: Issued by local police.

CONSULS: None.

REPAIRS: Small repairs only.

REPATRIATION: By bus, ship or plane from Dubrovnik International Airport.

TIME: Central European Time. GMT plus 1 hour.

POLICE/AMBULANCE/FIRE: Police, tel. 92; Fire, 93; Ambulance, 94.

SHORE LEAVE: Allowed.

AUTHORITY: Lucka Kapetanija Dubrovnik.

AGENT: Jadroagent – Dubrovnik. Gruska obala 26, 50000 Dubrovnik. Cable: Jadroagent Dubrovnik. Telex: 27514 yu jadrag.

KOPER: 45.31 N. 13.44 E.

PORT LIMITS: The seaward boundaries of the port are between "Debeli Rtic" (Punta Grossa) and Pt. Vilizan.

DOCUMENTS:

5 Crew Lists.
5 Passenger Lists.
5 Cargo Manifests.
2 Freighted Manifests.
2 Bills of Lading.
2 Store Lists.
1 Crew Effects List.
1 Cargo Gear Certificate.
1 Derating Declaration.
1 Health Certificate.

PILOTAGE: Pilot station may be contacted on VHF Channels 16 and 20 from 0600 hrs. until 2200 hrs. every day excluding holidays. Pilot boards 1 mile from entrance in roads or at anchorage. Definite notice to be sent by telex 24 hours before vessel's arrival in port area through its Agent in Koper. In case of bad weather, ship must wait for a Pilot at anchorage.

ANCHORAGE: Port area, depth 17 m., sandy bottom. Safe anchorages in case of S.E. wind near Pt. Vilizan and in case of N.E. wind near Debeli Pt. (Punta Grossa).

RESTRICTIONS: Vessels enter port by day and night, except tankers which enter during daylight hours and at nights in fair weather.

MAX. SIZE: General cargo and container vessels drawing up to 32 ft. and tankers with 39 ft. draft. No length restrictions.

HEALTH: Ship must have Health Declaration and in this case pratique is automatic. In the event of any suspected disease or fever on board, Master must advise Harbour Master or Agent by VHF Channel 16 or by telegraph.

RADIO: Communication on MW and SW through Rijeka Radio.

VHF: Communication on Koper Roads on Channel 16, 20 and 12. On Channel 20 it is possible to telephone outside the country.

RADAR: No service available.

TUGS: In area of old port, 2 available, 750 h.p. and 1,500 h.p. equipped for fire fighting.

BERTHING: 1,200 m. of operative quay with depths from 6 to 12 m. Berth Nos. 2, 8, 9 are equipped with shore cranes. On other berths handling is by ship's own gear.

CRANES: 4 shore cranes with capacity of 20 tons each and 1 with capacity of 25 tons. 3 shore cranes are on Pier 8, 9 and 2 on Pier 2. Mobile cranes: 2×20 tons, 1×12 tons.

Timber terminal is equipped with Portal crane of 8 tons. All harbour services are mechanised, i.e. performed by fork-lifts, trucks, transporters, pallets and other modern means.

BULK CARGO FACILITIES: 2 berths, (No's. 8 and 9) with length 280 m. together equipped with 3 shore cranes (grab discharging/loading) with max. draft 32 ft. Loading/discharging rates for grain, ores, meal, etc. 1,500 M/T per WWD. Fertilisers etc. 1,000 tons WWD. Also used for handling logs and timber.

SPECIALISED CARGO HANDLING FACILITIES: 1 Ro/Ro berth (No. 6) for handling Ro/Ro traffic.

The temporary container berth (No. 2) is equipped with 2 shore cranes with annual capacity of 40,000 TEU. the new container berth (No. 7) has recently been completed and will become operational in June 1979 with a capacity of 60,000 TEU. For handling containers the port has 2 straddle carriers for 20 – 40 ft. containers. Containers stacking 2 high, 6 Mafi tugs, forklifts for handling empty containers, etc.

Terminal for liquid chemicals has a depth of 10 m.

BRIDGES: None.

STEVEDORES: Gangs ordered from the Port of Koper Authority, who are stevedores, by Agents and forwarding agents in Koper.

MEDICAL: Medical assistance and hospital available.

TANKERS: Tanker berth for crude oil with max. draft 40 ft., equipped with 3×8 in. arms.

FRESH WATER: Available from any pier. Rate of delivery about 15 t.p.h.
FUEL: None available.
FIRE PRECAUTIONS: Usual precautions.
CONSULS: Italy.
REPAIRS: Small repairs can be carried out at Koper. In Izola, 2 miles from Koper, is wharf "2nd October". The repair service for containers is in the Port.
DRY DOCKS: In Izola for vessels up to 16,000 d.w.t.
SURVEYORS: In Koper – Jugoregister. In Rijeka or Trieste all representatives.
GANGWAY/DECK WATCHMEN: Available at ship's request.
HATCHES: Opening/closing hatches. If not performed by crew, then by stevedores.
CUSTOMS ALLOWANCES: 200 cigarettes for each member of crew and 1 bottle of spirits and reasonable amount of wine per man per day.
CARGO GEAR: 40 ton heavy lift shore crane available.
REPATRIATION: By bus, by railway from Koper or by air from the airport.
AIRPORT: Ljubljana (Brnik) – 120 km. Rijeka – 100 km. Pula – 100 km. Ronke (Italy) – 80 km.
TIME: GMT plus 1 hour.
HOLIDAYS: New Year's days (1st, 2nd January), 27th April, May Days (1st and 2nd May), 4th July, 22nd July, 1st November, Republic Days (29th, 30th November).
POLICE/AMBULANCE/FIRE: Police No. 92, Ambulance No. 94, Fire No. 93.
TELEPHONES: From anchorage it is possible to phone through VHF Channel 20. Telephones can be installed onboard at berths Nos. 1a, 1, 2, 3, 4 and 5.
SHORE LEAVE: Allowed after clearing inwards (free pratique).
IDENTIFICATION CARDS: Shore pass issued by local police (without photograph).
REGULATIONS: None.
DEVELOPMENTS: Construction of a new berth for bulk cargoes (No. 10) nearing completion, will become operational in January 1980. New Ro/Ro ramp under construction until March 1980. The equipment (container crane with lifting capacity 40 tons) for the container berth (No. 7) will start operating in June 1979.

2 new straddle carriers expected December 1978. The new equipment will be used at the timber terminal.
AUTHORITY: Lucka Koper.
AGENT: Jadroagent – Koper. Vojkovo nabrezje 30, P.O. Box 60, 66000 Koper. Cable: Jadroagent Koper. Telex: 34234 yu jadrag.

PLOCE: 43.03 N. 17.26 E.

DOCUMENTS/HEALTH/HOLIDAYS: Same as "Rijeka".
PILOTAGE: Compulsory for vessels over 500 g.r.t. Pilot boards vessel at entrance of the channel.
ANCHORAGE: Vessels may anchor under lee of the coast between Point Visnjica and Dobrogosce Bay except in case of S.W. and West winds when recommended drop anchor about 1 mile South of Soline Bay (S.E. of the entrance of the channel). Good holding.
RESTRICTIONS: Ship entering channel between Visnjica Point and embankment of right hand bank must keep in middle, leaving buoys to starboard. Recommended speed 5–8 knots.
MAX. SIZE: Only draft limited to a max. 38 ft. Also see "Shipmasters Report".
RADIO: Nearest Radio Station Split Radio YUS – 2574 kc/s.
TUGS: 2 tugs of 850 h.p.
BERTHING: New Dock No. 5, depth 38 ft. Channel depth 38 ft. All other berths from 31 to 34 ft. 6 ins.
STEVEDORES: Port Enterprise of Ploce is sole stevedoring company.
MEDICAL: Medical service available. Nearest hospital at Mostar (64 km.).
FRESH WATER: Available from quay.
FUEL: Nearest bunker station at Split.
DEVELOPMENTS: Dredging to accommodate vessels of 60,000 d.w.t. and construction of facilities for unloading tankers with crude oil for refinery of Bosanski Brod.
GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: If not performed by crew, stevedores.
CUSTOMS ALLOWANCE: About 40 cigarettes and reasonable amount wine/spirits per man per day.
IDENTIFICATION CARDS: Shore pass issued by local police.
REPAIRS: Only small repairs.
REPATRIATION: By train or bus. By plane from nearby airports, Mostar, Split and Dubrovnik.
TIME: GMT plus 1 hour.
POLICE/AMBULANCE/FIRE: Police, Tel. 79–006; Ambulance, 79–115; Fire, 79–029.
SHORE LEAVE: Allowed.
SHIPMASTERS REPORT: 1977. Master states the max. draft is 34 ft. 6 in. (New No. 5 berth).
AUTHORITY: Lucka Kapetanija – Ploce.
AGENT: Jadroagent – Ploce, Trg Marsala Tita 5, P.O. Box 111, 58340 Ploce. Cable: Jadroagent Ploce. Telex: 26239 yu jadrag.

RIJEKA: 45.21 N. 14.26 E.

DOCUMENTS:

10 Crew Lists – 2 by mail from last port of call if time allows.
5 Passenger Lists.
3 Manifests of Dangerous Cargo (send cable before arrival with description).
3 Stores Lists.
2 Private Declaration.
8 Cargo Manifests with one extra for customs.
2 Transit Cargo Manifests.
1 List of Organic goods.

Cargo Manifests and copy of Cargo Plan with Hatch Lists, if possible, should be mailed to Agent from loading port.
PILOTAGE: Compulsory in Inner Harbour only for vessels over 500 BRT. Pilot boards in the roads 0.5 mile from main breakwater. Pilot on VHF Channel 8.
ANCHORAGE: All vessels, with the exception of those loaded with dangerous or hazardous cargoes, must anchor in the zone enclosed by the following points:

a) 45° 20.0′ N. – 14° 22.7′ E.	c) 45° 15.1′ N. – 14° 27.1′ E.
b) 45° 17.5′ N. – 14° 20.0′ E.	d) 45° 18.4′ N. – 14° 28.5′ E.

Tankers and vessels with dangerous cargoes must anchor in the following zone:

a) 45° 17.8′ N. – 14° 28.0′ E.	c) 45° 14.1′ N. – 14° 29.4′ E.
b) 45° 15.1′ N. – 14° 27.1′ E.	d) 45° 16.1′ N. – 14° 31.8′ E.

RESTRICTIONS: At Bakar petroleum berth only daylight berthing permitted.
MAX. SIZE: Rijeka and Susak Basins, permitted draft 31 ft. but 34 ft. at the Silo berth. Bakar Basin, permitted draft 50 ft. Vessels up to 120,000 d.w.t. have discharged ore at Bakar.
HEALTH: To obtain free pratique radio 24 hours before arrival advising following details; number of crew and passengers, health conditions and possible infectious diseases. No one allowed to leave vessel until free pratique obtained.
RADIO: Rijeka Radio, call sign YUZ, 500 and 512 kc/s. Radio telephone on 2 m. band covering area of Kvarner Gulf.
TUGS: From 600 to 2,170 h.p. available.
STEVEDORES: Port works 5 days a week in 2 shifts: 1st shift from 0630 to 1430 hrs. 2nd shift from 1430 to 2230 hrs. The third shift may be worked on overtime, from 2230 to 0630 hrs. Saturdays, Sundays and holidays may be worked on overtime.

Unloading of bulk cargo at the basin of Bakar during the first shift on Saturday from 0630 to 1430 hrs. is considered to be an ordinary working shift. The working week of this basin, therefore, lasts from Monday 0630 hrs. to Saturday 1430 hrs.

Unloading of bulk cargo at the above mentioned Basin includes, as well as the unloading, continuation of unloading the vessels that might be, for some special operational reasons, shifted from Bakar Basin to Susak Basin.

Loading/unloading of cereals and oilseeds in bulk by means of loading/unloading towers in Silo Rijeka in the first shift on Saturday, from 0640 to 1430 hrs. is considered to be an ordinary working shift, and therefore the working week for such operations lasts from Monday 0630 hrs. to Saturday 1430 hrs.

The working week for handling timber at Susak Basin lasts from Monday to Friday from 0630 to 1430 hrs.
Shipmaster's Report: Floating crane 100-ton capacity available.
MEDICAL: 2 hospitals and all kinds of medical assistance.
TANKERS: Old Petroleum Port, for tankers up to 150 m. length, berthing alongside breakwater.

Bakar, 2 berths for tankers up to 70,000 d.w.t. stern to quay. 1 berth alongside quay for tankers up to 30,000 d.w.t.

Urinj, 5 miles East of Rijeka, a new berth for tankers up to 200,000 d.w.t. Slop reception facilities available – advance notice required. Vessels moor stern to quay using both anchors.
DENSITY: 1020 to 1025, depending on place, season and weather.
FRESH WATER: Available from quay in any quantity.
FUEL: All grades of bunkers available by barge at 48 hours' notice.
FIRE PRECAUTIONS: If 2 tankers moored side by side in Bakar a tug required standing by. Tankers moored stern to quay, must have towing wire rigged.
GANGWAY/DECK WATCHMEN: Service available.
OPENING/CLOSING HATCHES: Crew may do this, otherwise stevedores for extra payment.
CUSTOMS ALLOWANCE: About 40 cigarettes and 0.5 litre wine per man per day.
CARGO GEAR: Although operations usually by shore cranes, ship must have efficient cargo gear and relative certificates.
IDENTIFICATION CARDS: Shore passes issued by local police.
CONSULS: Netherlands. Others at Zagreb and Beograd.
REPAIRS: All kinds available. Floating cranes up to 100 tons capacity.
DRY DOCKS: 3 docks floating up to 5,600 d.w.t., 12,000 d.w.t. and 24,000 d.w.t. lifting capacity.
REPATRIATION: Possible by train, bus and air. New airport at Rijeka.
TIME: GMT plus 1 hour.
HOLIDAYS: January 1st and 2nd; May 1st and 2nd; July 4th; July 27th; November 29th and 30th. Work can usually be arranged on Sundays, January 2nd, May 2nd and November 30th from 0700 to 1400 hrs. for extra payment. If a holiday falls on a Sunday the first working day after becomes a holiday.
POLICE/AMBULANCE/FIRE: Police, tel. 92; Ambulance, tel. 94; Fire, tel. 93; Port fire brigade, tel. 25–126.

SHORE LEAVE: Allowed. Crew members and passengers have to be on board 1 hour before scheduled sailing time.
AUTHORITY: Lucka Kapetanija – Rijeka.

AGENT: Jadroagent – Rijeka, Obala JR Mornarice 16, P.O. Box 120, 51000 Rijeka. Cable: Jadroagent Rijeka. Telex: 24100 yu jadrag.

SIBENIK: 43.43 N. 15.52 E.

DOCUMENTS/HEALTH/HOLIDAYS: Same as "Rijeka".
PILOTAGE: Pilot boards vessel at the entrance of St. Ante Channel, within a circle of 3 miles radius from Jadrija Lighthouse.
ANCHORAGE: Vessels waiting Pilot must anchor between Prvic Island and the shore if coming from the West, or between the South point of Zlarin and the shore if coming from the East, all in depths of 22 m.

In the Bay of Sibenik, vessels may anchor on the N.W. side of St. Ante Channel in depths of 30–40 m. Alternatively, a buoy mooring is available.
RESTRICTIONS: All vessels over 50 g.r.t. must apply for permission to enter St. Ante Channel by using International Code Signal Z by flag, or sound signal or light signal. Alternatively, a white light above a red light visible all round may be used.

Vessels may enter channel only when authorised by a signal, 2 black balls vertically disposed by day or 2 green lights vertically displayed by night, made by the signalling station at Jadrija
MAX. SIZE: Only draft limited. 33 ft. alongside in deepest berth.
RADIO: None. Vessel may call Agent through Rijeka Radio.
TUGS: 1 of 750 h.p. 1 of 350 h.p.
STEVEDORES: Port Enterprise Sibenik.
MEDICAL: Medical service available including hospitalisation.
FRESH WATER: Available from quay.
FUEL: Can be delivered by barge from Split. Recommended to check well in advance.
GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: If not performed by crew, can be done by stevedores.
CUSTOMS ALLOWANCE: About 40 cigarettes and reasonable amount wine/spirits per man per day.
CARGO GEAR: General cargo discharged using ship's gear. Ore and other dry bulk cargoes handled by shore cranes fitted with grabs.
IDENTIFICATION CARDS: Shore passes given by local police.
REPAIRS: Small repairs only.
REPATRIATION: By train or bus, by air from Split Airport nearby, or from Zagreb or Zadar.
TIME: GMT plus 1 hour.
POLICE/AMBULANCE/FIRE: Police, 92; Ambulance, 94; Fire, 93.
SHORE LEAVE: Allowed.
PORT AUTHORITY: Lucka Kapetanija.

AGENT: Jadroagent – Sibenik, Obala oslobodenja 9, 59000 Sibenik. Cable: Jadroagent Sibenik. Telex: 27323 yu jadrag.

SPLIT: 43.31 N. 16.26 E.

DOCUMENTS/HEALTH/HOLIDAYS: Same as "Rijeka".
PILOTAGE: Pilot boards vessel in roads.
ANCHORAGE: Vessels anchor in Solin Basin within a circle with centre approximately in 43° 32′ 36″ N. 16° 24′ 36″ E.
MAX. SIZE: Length and breadth not limited. Draft permitted in Southern Basin 29 ft. Northern Basin 34 ft. (ore, coal), 36 ft. (grain). General Cargo, 31 ft.
RADIO: Split Radio working on 2182 and 1574 kc/s.
TUGS: From 240 to 1350 h.p. available.
MEDICAL: All medical assistance including hospitalisation.
TANKERS: 2 berths for tankers, max. length 200 m., draft 31 ft.
FRESH WATER: Available from quay.
FUEL: Available from local storage tanks.
GANGWAY/DECK WATCHMEN: Available.
OPENING/CLOSING HATCHES: By crew or stevedores.
CUSTOMS ALLOWANCE: About 40 cigarettes and reasonable amount wine/spirits per man per day.
IDENTIFICATION CARDS: Shore passes issued by local police.
CONSULS: British, Dutch, Italian, and German.
REPAIRS: Any kind, including dry docking.
DRY DOCKS: Floating dock at Trogir for vessels up to 28,000 d.w.t.
REPATRIATION: By train, bus or air from Split Airport.
TIME: GMT plus 1 hour.
POLICE/AMBULANCE/FIRE: Police, 92,; Ambulance, 94; Fire, 93.
GENERAL: Port consists of 2 basins: The Old Southern Port for passenger ships and with a few berths for general cargo.
SHORE LEAVE: Allowed.
AUTHORITY: Lucka Kapetanija.

AGENT: Jadroagent – Split, Saveznicka obala 1, 58000 Split. Cable: Jadroagent Split. Telex: 26116 yu jadrag.

ZADAR: 44.07 N. 15.14 E.

DOCUMENTS/HEALTH/HOLIDAYS: Same as "Rijeka".
PILOTAGE: 48 and 24 hours notice of ETA must be given to Agent. According these notices Agent arranges for Pilot to board on arrival. Pilot boat blue motor launch with large "P" on bows and "H" flag. No particular signals to be made by vessels requiring Pilot. Pilot contacted on VHF Channel 12 and boards ship in the anchorage.
ANCHORAGE: About 0.5 mile, 245° from green port light, (FL. G. 2 sec.) on the North part of Zadar Peninsular. Average depth about 40 m.
MAX. SIZE: Zadar, old port, permissible draft 6.25 m. (20.5 ft.) Zadar-Gazenica, port for dry cargo, max. draft 6.60 m. (21.7 ft.) forward. Length 160 m. Also see "Tankers" and "Soya Bean Berth".
RADIO: Rijekaradio, JUZ.
VHF: Information/Operations Centre Zadar listens on VHF Channel 16.
TUGS: No tugs available, but can be ordered from Split.
BERTHING: *Soya Bean Berth:* 1 berth for soya bean with discharging equipment 400 t.p.h. Max. draft 11 m. (36.1 ft.).
STEVEDORES: Number of gangs required to be stated in usual notice of ETA.
MEDICAL: Advance notice not necessary, hospital facilities available.
TANKERS: At Zadar-Gazenica Port: 1 tanker berth max. draft 10.35 m. (34 ft.) forward. Length of the ship is not restricted.
DENSITY: Average density in the port – 1026.
FRESH WATER: Fresh water connections on piers, rate of delivery 8–15 t.p.h.
FUEL: Fuel available for coasters only.
DEVELOPMENTS: Zadar-Gazenica Port second berth for dry cargo ships (length 60 m.)
GANGWAY/DECK WATCHMEN: Not necessary.
OPENING/CLOSING HATCHES: Normally, but not compulsorily, carried out by stevedores.
CUSTOMS ALLOWANCE: 200 cigarettes per person. Tobacco and liquor sealed in bond.
IDENTIFICATION CARDS: Needed. Issued by local police.
CONSULS: None.
REPAIRS: Possible.
REPATRIATION: Facilities exist for effecting crew changes and arranging necessary repatriations.
AIRPORT: Zadar airport served by regular daily flight for Zagreb with connection on all international flights.
DRY DOCK: 1 floating dock for ships up to about 2,000 b.r.t. in Zadar. 1 floating dock for ships up to about 20,000 b.r.t. on Ugljan Island near Zadar.
TIME: GMT plus 1 hour.
POLICE/AMBULANCE/FIRE: Police, 92; Ambulance, 94; Fire, 93.
TELEPHONES: No facilities for placing telephones on board.
AUTHORITY: Lucka Kapetanija – Zadar.

AGENTS: Jadranska Pomorska Agencija, Filijala Zadar, N. Nodila b.b., Zadar. Tel. 23210, 23215. Telex: 27129 Yu Jadrag. Telegrams: Jadroagent Zadar.

ZELENIKA: 42.27 N. 18.35 E.

DOCUMENTS/HEALTH: Same as "Rijeka".
PILOTAGE: Pilot boards at entrance of the Bay of Kotor, near point Punta Ostro. In bad weather Pilot boards at anchorage.
ANCHORAGE: Good ground for anchorage S.W. of Zelenika, about 0.25 mile off port light in about 27 fathoms.
MAX. SIZE: 2 quays 330 ft. and 420 ft. for vessels drawing 17 ft. to 27 ft. Breadth not limited. Vessels the size of a liberty have been berthed by mooring the vessel a couple of metres off quay. 2 other quays, but with very shallow water, used for coastwise traffic only.
HEALTH: Radio Agent requesting free pratique, 24 hours before arrival. For vessels over 500 g.r.t. pratique is given at the anchorage. For small ships and yachts, pratique is given at Zelenika.
TUGS: None. In cases of necessity can be ordered from shipyard at Bijela.
BERTHING: The berth is assigned through the Agents giving notice 24 or 48 hours in advance.
STEVEDORES: State stevedoring company.
MEDICAL: Nearest hospital at nearby town of Herceq-Novi.
FRESH WATER: Available from hydrant on quay.
FUEL: Nearest bunker station is Bar.
OPENING/CLOSING HATCHES: If not performed by crew, can be done by stevedores.
CUSTOMS ALLOWANCE: About 40 cigarettes and reasonable quantity wine/spirits per man per day.
CARGO GEAR: Loading, unloading performed with ship's gear.
IDENTIFICATION CARDS: Shore passes issued by local police.
CONSULS: None.
REPAIRS: Any kind of repairs including dry docking at nearby shipyard at Bijela.
DRY DOCKS: Floating dock lifting capacity 10,000 tons, LOA. 184 m., length over keelblocks 165.6 m., inside free breadth 25.5 m.

Floating dock lifting capacity 33,000 tons. LOA 252 m., length over keelblocks 235 m., inside free breadth 44 m.

The yard is about 4 miles East of Zelenika. The yard has 1,300 m. of fitting pier.

REPATRIATION: By bus to Dubrovnik, and from there bus, plane or ship to main cities in Yugoslavia.
TIME: Central European Time. GMT plus 1 hour.
HOLIDAYS: January 1st and 2nd; May 1st and 2nd; July 4th and 13th; November 29th and 30th. Work can be arranged on Sundays and on 2nd day of two-day holidays.
POLICE/AMBULANCE/FIRE: No direct connection, in case of necessity call Agency, Tel. (082) 43-436-Jadroagent or (082) 43-933 Jugoslovenska.
SHORE LEAVE: Allowed.
AUTHORITY: Lucka Ispostava Zelenika.
AGENT: Jadroagent, Medunarodna pomorska i saobracajna agencija, Poslovna jedinica, Bijela. Tel. 87-436. Telegraphic address: Jadroagent Bijela.

NOTES

Please also advise Shipping Guides Ltd.

Zaire Republic

GENERAL:

ETA: It is essential that any change of vessels ETA should be transmitted sufficiently in advance in order to avoid short shipments of cargo.

Matadi is only a transit port where cargo is not stored in order to avoid congestion.

Imported cargo is immediately re-forwarded to the interior while export cargo is only brought to Matadi a few days before the ETA of the vessel for which it has been booked.

Therefore, in order to make the cargo available at Matadi, shippers need a notice varying according to the cargo concerned, but which cannot be less than 2 weeks as is the case for coffee.

Agents at Matadi and Boma have been instructed to inform Port Authorities latest 4 days before berthing of inward cargo tonnages.

Non compliance with this provision may result in berthing delay.

PILOTAGE: Ships bound for Matadi and/or Boma must take a Pilot at the pilot station at Banana (at the mouth of the Zaire River). Pilot station at Banana can be contacted directly by radio (VHF).

In order to increase the safety and to facilitate the navigation on the river the Regie des Voies Maritimes have decided that in case a vessel is not equipped with a VHF installation the Pilot will bring one on board, for which a charge is made.

The following rules must be observed at the request of the Regie des Voies Maritimes for embarking and dis-embarking of Pilots.

If gangway is rigged astern on the port side it is compulsory to use the pilot ladder also.

If gangway rigged amidships on port side it is recommended that the pilot ladder is used in combination.

Pilots requesting only the gangway do so at their own risk.

Ships sailing from Matadi for Banana must pass Boma before 1630 hrs. otherwise they remain at anchor at Boma since navigation on the Zaire River is normally limited to daylight hours.

With regard to the trim the pilotage services ask Masters to comply with following rules:

Maximum trim 12 ft. aft; 4 ft. forward.

DOCUMENTS: *Ship's Documents required on arrival:*

7 Crew Lists.
3 Lists of Arms and Ammunition.
7 Passenger Lists.
2 Crew Declarations.
3 Lists of Ports of Call.
2 Stores Lists.
1 International Tonnage Certificate.
1 Deratisation Exemption Certificate.
1 Cargo Ship Safety Equipment Certificate.
1 Certificate of Registry.
1 Radiotelegraphy Certificate.
1 Construction Certificate.
1 Certificate Form on Board.
Free Pratique.

Documents required for disembarking passengers and discharging cargo:

A. To be received by mail at least 8 days before ship's arrival:
(1). Cargo:
  3 Freight Manifests
  8 Cargo Manifests
  5 Copies of Bills of Lading
  6 Copies of Stowage Plans.
(2). Passengers:
  1 Accountancy
  3 Passenger Lists, for passengers for the port/or in transit.
B. To be received by ship's bag at ship's arrival at quay:
  On arrival following documents must be available on board:
(1). Cargo:
  1 Freight Manifest
  4 Cargo Manifests
  3 Copies of Bills of Lading.
(2). Passengers:
  1 Freight Manifest
  4 Passenger Lists for passengers for the port and/or in transit.

It is most important that stowage plans be available before vessel's arrival. Vessel's operations are indeed delayed to the next shift if same are only remitted upon arrival.

FUEL: Must be ordered from Petrozaire at least 48 hours before required. Normally supply of gasoil, light and heavy fuel is effected at Banana between buoys 12 and 14 ex barges with: minimum quantity – 250 tons; maximum quantity – 800 tons (total barge quantity).

Smaller quantities can also be supplied in Matadi or Ango Ango.

DRAFTS AND CURRENTS: Drafts on River Zaire are as follows:

Inwards: High water: 25 ft. 06 in. Low water: 24 ft. 06 in.

Outwards: High water: 26 ft. 06 in. Low Water: 25 ft. 06 in.

The authorized drafts are notified regularly by the Port Authorities.

The currents of the river and from berth to berth as well in Matadi as in Boma vary and depend upon the high and low levels of the water sometimes adverse currents and still waters as stated before.

For proceeding to Matadi and according to the season vessels must have at least a speed of 10.5 to 11 knots, especially to pass the "Devils Cauldron" about 3 miles before Matadi.

STEVEDORES: The ONATRA (Office National des Transports) – public institution, has the monopoly of the handling, stevedoring and transit operations at the ports of Matadi and Boma.

At each berth the responsible "Pier Master" remains in constant contact with the first Mate during the whole operation.

Working shifts are as follows: 1st. shift: 0630–1430 hrs.; 2nd shift: 1430–2230 hrs. overtime; 3rd shift: 2230–0630 hrs. overtime.

Work must be ordered the day before vessel's arrival. However, if gangs are available, work can still be ordered the day of vessel's arrival but latest at 0930 hrs. during week days.

In principle no work is done on Sundays, holidays and during the night. If required same has to be ordered by writing 1 working day in advance before 1000 hrs. Port Authorities will then decide according to the situation at that moment.

According to the situation of the Port, the Authorities can also order labour 24 hours per day Sundays and holidays included.

At Boma there is no third shift – however on special request, work can eventually be granted until 2400 hrs.

At Matadi work during third shift will only be ordered upon special request from vessel.

GENERAL: *Quay Practices:*

The courtesy Zaire flag must be hoisted by foreign ships during daytime.

In view of the proximity of the town, the use of whistles, sirens and similar signals is forbidden.

Safety nets must be put between ship and quay at each of the working hatches and beneath the gangway.

No rubbish whatsoever may be thrown overboard.

Cargo plans:

According to Onatra's instructions stowage plans of ships calling at Matadi/Boma must be issued in such a way that they show clearly where all goods loaded for Matadi/Boma in several ports are located. This enables Onatra to have a clear view of each vessel and to study, before ship's arrival, the discharging/loading possibilities.

Those stowage plans must reach Agent before ship's arrival.

Vessels loading/discharging operations will only start during the next shift if stowage plans are remitted upon vessels' arrival. A request can be made to shift the vessel to a more convenient berth depending upon the cargo concerned.

With regard to cargo loaded Onatra does not issue stowage plans and Masters should consequently be instructed to draw up stowage plans for transmission to corresponding discharging ports.

It is customary not to moor ships at Matadi/Boma between 2200 hrs. and 0600 hrs. They remain at anchor.

Important Notices:

In connection with manifests for Matadi/Boma cargo:

1. Liner Terms Cargo:

According to the General Rules and Tariffs stowing, unstowing, loading, discharging rates are applied on weight/measurement, whichever is the highest irrespective of the freightunit.

The Port Authority Onatra instructs therefore that:

a) The freight-manifest remitted to them must show three columns detailing respectively weight and volume and freightunit (freighttons) of each cargo/bill of lading.

b) At the bottom of each page a summing up of tonnage/weight, tonnage/volume and freightunits (freighttons) should be mentioned.

c) The last page of the manifest shall contain a separate recapitulation of weighttons, volumes and freightunits (freighttons) showing thus the respective totals of each item.

Corrections or additionals added by the Agent at Matadi/Boma by hand or with typewriter are not accepted by Onatra.

Onatra is fully implementing the regulations and, for vessels whose manifests are incomplete or incorrect, a penalty, which may reach 1,000% of the stevedoring costs (or 10 times) is charged.

2. F.I.O. Cargo:

The same information is to be supplied as for Liner Cargo but, in addition, the manifest and B/L must clearly mention that cargo is carried on free out terms.

BANANA: 6.01 S. 12.25 E.

DOCUMENTS: See "General" before first port.

APPROACHES: In view of the strong current, and in view of the fact that the lights of the navigation buoys on the river do not always work properly, night navigation is practically impossible. Tankers, therefore, arriving at night, or in times of congestion, are recommended to anchor approx. 5 miles West of Moita Seca Light in approx. 10 fathoms, about 12 miles from Stella Buoy.

PILOTAGE: River can be entered direct from sea in deep water. Pilots not compulsory. Mooring Master boards incoming tankers to assist mooring at buoys. Notice of arrival to be given to Harbour Master, radio "Maritime Banana".

The position of the flare of the SOCIR Refinery at Moanda is:

5° 57′ 51″ S.
12° 25′ 07″ E.

The flare is visible during day and night and may be a good bearing for vessels approaching river.

Sailing from "Stella Buoy" after 0600 hrs. Vessels with a speed of up to 14 knots must pass Bulabemba before 1400 hrs. and vessels with speed in excess of 14 knots by 1500 hrs.

MAX. SIZE: Tankers up to 40 ft. draft may discharge at buoy moorings. Banana Creek is limited to vessels draft not exceeding 15 ft.

HEALTH: Quarantine Officer boards at sea buoy. Free pratique usually granted as soon as Maritime Health Declaration completed. Valid smallpox, cholera and yellow fever inoculations required for all crew members.
RADIO: At least 3 days notice required to Agent (ETA and draft only) and to Harbour Master, Maritime Banana (ETA only). It is necessary to transmit these notices via another shore station (e.g. Capetown Radio, Libreville Radio, etc.), as the Banana Radio Station can only be reached 2 days prior arrival. Close advice on changes in ETA necessary to prevent delays in waiting for cargo-lighters and push-boats.

Radio Banana (9 PA) working on 495 kc/s. and 8714 kc/s.
BERTHING: Tankers berth in river anchorage between buoys 12 and 14, both anchors used. Tugs not available and not required.

Upon arrival at the berths, tankers should use both anchors on long scope in view of the current. When anchoring it is recommended to drop outside anchor first, up to approx. 3 shackles and subsequently, after the ship's swing to starboard, the starboard anchor. It is essential that ample cable is used on both anchors, approx. 8 shackles. Tankers sail without Pilot and may leave any time.
CARGO OPERATIONS: Tankers discharge-into/load-from cargo barges moored alongside either side. These barges (3 in total) are equipped with 8-in. cargo hoses (position of hose connection amidships) and suitable fenders, have a capacity of 1,650 long tons or 2,050 cu.m., and can receive the cargo at the rate of up to 800 t.p.h. or, alternatively, can load at a rate of approx. 400 t.p.h. Under normal conditions the refinery will handle 3 barges per shift of 12 hours. Cargo operations are effected continuously day and night, during Sundays and holidays, in shifts from 0600 to 1800 hrs. and from 1800 hrs. to 0600 hrs. Therefore a tanker of approx. 19,000 tons can be completed in a net discharging/loading time of approximately 48 hours. During the cargo operations, 6 deckhands stay on board to handle cargo hoses and barges. These men are to be provided with meals and accommodation (one spare cabin will be sufficient). Masters are also requested to instruct their crew to assist with the mooring/unmooring of cargo barges alongside.
DENSITY: Brackish to salt.
FRESH WATER: Not available.
FUEL: Must be ordered 48 hours in advance from Petro-Zaire. Bunkering takes place between Buoys Nos. 12 and 14. Gasoil, light and heavy fuel oil available. Barge capacity 800 ton, minimum order 250 tons.
MEDICAL: Doctor available for emergency only. No dental or hospital facilities.
TANKERS: No tank-cleaning facilities. Barge available for dirty ballast reception limited to 2,000 cu.m. per trip.
REPAIRS: No facilities.
GENERAL: During stay of tankers at anchorage the discharge and/or loading operations are constantly supervised by representatives of the refinery, who are to be accommodated on board and to be provided with meals.
SHORE LEAVE: Shore leave is presently not allowed due to lack of communications; only in urgent cases a crew member may join one of the refinery tugs. There is no entertainment whatsoever ashore.
AUTHORITY: Office National des Transports, Onatra.

AGENT: See "Matadi".

BOMA: 05.51 S. 13.03 E.

DOCUMENTS: See "General" before first port.
PILOTAGE: Port is situated on the right bank of river, about 44 miles above Pilot station at Banana.

Radio "Maritime Banana" 24 hours prior arrival giving ETA at Banana and requesting Pilot. Pilot available between 0700 and 2200 hrs. for arriving vessels and 0600–1600 hrs. for vessels sailing for Matadi or Banana.
RESTRICTIONS: Depth at bar 30 ft. Permissible draft for navigating river varies between 20 ft. to 27 ft. according to local conditions and should be checked with Port Authority in advance.
HEALTH: Quarantine Officer boards on arrival. All Crew members require valid smallpox, cholera vaccinations and yellow fever inoculation certificates.
TUGS: 2 tugs of 200 and 300 h.p. available to assist berthing.
BERTHING: Total quay length 450 m. with 3 berths alongside. Depth of water at the quay 8 m. at low water. Maximum current at the berths is 3 knots.
STEVEDORES: See "General" before first port.
Port Equipment:
- 6 electric cranes on rails, capacity 3–6 tons.
- 2 steam cranes on rails, capacity 7.5 ton at 6 m. 5.0 ton at 10 m.
- 5 banana conveyors.
- 1 electric crane, capacity 6 tons.
- 8 forklifts.
- 7 barges, capacity 100 tons.
- 1 pontoon, capacity 75 tons.

FRESH WATER: Available from quays, not suitable for drinking.
FUEL: See "General" before first port.
MEDICAL: Doctors and hospital facilities available.
REPAIRS: No facilities.
AUTHORITY: Office National des Transport – Onatra.
AGENT: See "Matadi'.

MATADI, (including Ango-Ango): 05.49 S. 13.27 E.
(See Plan Book)

DOCUMENTS: 7 days before arrival of vessel the following must be in the hands of the Agent:

4 Manifests (detailing explosives, general cargo, heavy lifts).
3 Stowage Plans.
6 Copies of Bills of Lading.
1 Freighted Manifest.

On arrival:
Maritime Declaration.
Ship's Register.
3 Crew Personal Effects Lists.
2 Stowage Plans.
1 Freighted Manifest.
3 Lists of Ports of Call.
7 Passengers Landed.
7 Passengers in Transit.
5 Crew Lists.
5 Crew Boys Lists.
2 Provisions Lists.
4 Individual Manifests.

PILOTAGE: Compulsory for vessels over 500 g.r.t. Radio "Maritime Banana" 24 hours prior arrival giving ETA at Banana and requesting Pilot. Pilot boards at Banana Pilot station. Distance from Banana to Matadi about 75 miles. Pilot available between 0700 and 2200 hrs. for arriving vessels and 0600–1600 hrs. for vessels sailing.
RESTRICTIONS: Depth at bar 30 ft. Permissible draft for navigating Zaire River varies between 20 ft. and 27 ft. according to local conditions and should be checked with the Port Authority 3 days in advance.
MAX. SIZE: Controlled by draft in river.
HEALTH: Quarantine Officer boards on arrival. All crew members require valid smallpox, cholera and yellow fever inoculation certificates.
TUGS: 2 tugs, largest 600 h.p., available to assist berthing.
BERTHING: At Matadi.

Pier 1	149 m.	Pier 6	176 m.
Pier 2	161 m.	Pier 7	188 m.
Pier 3	156 m.	Pier 8	149 m.
Pier 4	158 m.	Pier 9	167 m.
Pier 5	156 m.	Pier 10	143 m.

Min. depth at Piers 8–10 – 10 m.
At Ango-Ango:
Pier A. Length 150 m.
(As a rule for discharge of inflammable goods and explosives.)
UNLOADING RATE: 400 to 600 tons of general cargo per day of 2 shifts.
CRANES:

44 Cranes Electric and hydraulic on rails	3–6 tons	
2 Cranes Steam	5 tons	
1 Crane Steam	10 tons	
1 Derrick Fixed	50 tons	Pier 4
1 Floating Crane	14 tons	
1 Portic Crane	5 tons	
6 Cranes Electric	3–6 tons	
2 Cranes Electric	10 tons	
3 Cranes Electric	6 tons	

BULK HANDLING FACILITIES: Palm oil is stocked by 4 companies in Matadi, 3 of which have pipe-lines to a main quay. The palm oil installations of CCP are at Ango-Ango where ships must berth at Sep Zaire pier. Vessels handling Sep Zaire cargoes are given priority at this pier and in case of unavailability of berth, palm oil would be loaded by barge of 260 tons capacity at Matadi.

Palmkernel Oil is also loaded at Berth Nos. 2–9 and Palm Oil at Berth Nos. 2–8 in Matadi.

P.L.Z. (Plantations Lever au Zaire) capacity	13,450 t.
AMATO-Freres	3,700 t.
MADAIL	2,340 t.
C.C.P.	3,627 t.

BARGES:

2 lighters	capacity 42 tons each
5 pontoons	capacity 75 t.
44 lighters	capacity 558 t.
3 Pontoons	capacity 450/500 t.
1 Tank barge	capacity 279 t.

DENSITY: Fresh water.
STEVEDORES: See "General" before first port.
TANKERS: Discharge at Sep Zaire pier at Ango-Ango or Matadi. If lightening necessary before berthing, this can be effected at Ramler Buoy, 17 miles above Banana. No tank-cleaning facilities. No fresh water.
FRESH WATER: Delivery aboard the ship through valves and at each pier. Maximum daily capacity 200 tons. Delivery takes place according to the quantity asked for and usually during night.

Delivery cannot be done at the loading berth of Sep Zaire at Ango Ango.

Suppliers need 48 hours notice. It is therefore highly recommended that Masters cable their needs well in advance to Agent and/or through owners.
FUEL: See "General" before first port.
TIDES: From early December till middle of February current runs at 10.5 to 11 knots. During this period vessels calling at Matadi must

have min. speed of 12.5 to 13 knots. It is reported that during the rainy season in June the tide runs at 12 knots plus, between Matadi and River entrance and navigation is very difficult at this time.

MEDICAL: Doctors and hospital facilities available.

REPAIRS: Small repairs possible at railway workshop.

AUTHORITY: Office National des Transports – Onatra.

AGENT: Comexas, S.A. B.P. 83, Matadi, Republic Zaire. Tel: 22.33 and 22.35. Cables: Comexas. Telex: 814.

NOTES

Please also advise Shipping Guides Ltd.

INDEX

NOTES

INDEX

A

Aabenraa 234
Aaiun, see El Aaiun 875
Aalborg 234
Abadan 437
Aberdeen 984
Abidjan 498
Abo, see Turku 292
Abonnema, see Degema 710
Aboshi, see Himeji 513
Abu Al Bu Khoosh 967
Abu Dhabi, see Mina Zayed 977
Abu Flus, see Basrah 457
Acajutla 271
Acapulco 652
Adamas, see Milos 353
Adelaide 32
Aden 1188
Agadir 662
Aghios Georgios, see Piraeus 355
Aghios Kosmos, see Piraeus 355
Aghios Nikolaos 347
Agioi Theodoroi 347
Agotnes 718
Aguadilla 789
Aguadulce 741
Aguilas 854
Aguirre, see Jobos 789
Ahus 882
Ain Sukhna 258
Aioi 505
Aitape 751
Ajaccio 295
Akantias, see Rhodes 356
Akita 506
Alameda, see San Francisco 1106
Albakr Terminal 456
Albania 1
Albany, W.A. 32
Albany, N.Y. 1041
Alba Terminal, see Sitra 82
Albatross Bay, see Weipa 70
Alesund 718
Alexandria, Egypt 258
Alexandria, Va. 1041
Alexandroupolis 347
Algeciras 854
Algeria, 1
  also see Late Reports
Algiers 1
Algoa Bay, see Port Elizabeth 846
Alhomen, see Jakobstad 283
Aliaga 934
Alicante 854
Alleppey 382
Almeria 855
Almirante 741
Almirante Barrosso Terminal,
  see Sao Sebastiao 120
Alotau 751
Alsancak, see Izmir 940
Altona, see Hamburg 336
Alvik 718
Amagasaki 506
Amapala 372
Ambes, see Bordeaux 296
Ambon 401
Ameriport, see Philadelphia 1094
Amesville, see New Orleans 1087
Amherstburg 137
Amlwch 985
Ampenan 415
Amsterdam 670
Amuay Bay 1134
Anacortes 1042
Anahuac, see Tampico 659
Anan 507
Anchorage 1042
Ancona 472
Andres, see Boca Chica 248
Anewa Bay 752
Angle Bay, see Milford Haven 1021
Ango Ango, see Matadi 1195
Angola 4
Angra dos Reis 100
Annaba 1
Antibes 295
Antifer, see Le Havre 305
Antigua, see St. Johns 607
Antilla 214
Antimonan 764
Antofagasta 180
Antonina, see Paranagua 106
Antwerp 91
Aomori 507
Apapa, see Lagos 712
Aparri 764
Apia 1183
Apra Harbour, see Guam 646
Aqaba 576
Aracaju, see Carmopolis 102
Aratu 101
Arawak Cay, see Nassau 78
Archangel 945
Ardalstangen 718
Ardjuna 401
Ardrossan, S.A. 33
Ardrossan, U.K. 985
Arendal 719
Argentina 8
Argostoli 348
Arhus 235
Arica 181
Arrecife 175
Arthur Kill, see New York 1089
Aruba, see Netherland Antilles 682
Arzannah Island 968
Arzew 2
Ascension Island 852
Ashdod, 469
  also see Late Reports
Ashkelon, see Ashdod 469
Ashtabula 1042
Asnaes 235
Assab 274
Astoria 1043
Atico 757
Atreco 1043
Atsumi 507
Attaka, see Santan Terminal 426
Atucha 16
Auckland 692
Aughimish Isle, see Shannon Estuary 466
Augusta 475
Australia 32
Avarua 208
Aveiro 785
Avernakke, see Nyborg 243
Aviles 855
Avondale, see New Orleans 1087
Avonmouth, see Bristol 988
Axelsvik, see Karlsborgsverken 888
Ayr 985
Azhikkal, see Calicut 386
Azores 75
Azovstal, see Zhdanov 965
Azua 248
Azzawiya 610

B

Babitonga Bay,
  see Sao Francisco do Sul 118
Baddeck 137
Bado, see Uddevalla 902
Baejarbryggjan, see Siglufjord 380
Bagnoli 476
Bagotville, see Port Alfred 153
Bahamas 77
Bahia, see Salvador 112
Bahia Blanca 25
Bahia Gregorio,
  see Punta Arenas 186
Bahia Honda, see Mariel 225
Bahia Las Minas 742
Bahrain 82
Bahregan Oil Centre,
  see Ras Bahregan 453
Baie Comeau 137
Bajo Grande 1146
Bakar, see Rijeka 1191
Balao Terminal 252
Balboa 743
Balikpapan 406
Baliwasan, see Zamboanga 780
Ballast Head 33
Ballast Point, see Sydney, N.S.W. 66
Balmain, see Sydney, N.S.W. 66
Baltimore 1043
Banaba 86
Banana 1194
Bandar Abbas 437
Bandar Emmam Khomeini,
  see Bandar Shahpour 439
Bandar Mahshahr 438
Bandar Seri Begawan 128
Bandar Shahpour 439
  (new name, Bandar Emmam Khomeini)
Bandholm 236
Bandirma 935
Banes 216
Bangkok 918
Bangladesh 87
Bangor, Maine 1044
Banias 906
Banjul 326
Bantry Bay 461
Banyuwangi 406
Banyuwangi (Port Meneng) 406
Bar 1190
Baracoa 216
Barahona 248
Barbados 89
Barbers Point, see Honolulu 1069
Barburata, see Puerto Cabello 1170
Barcadera 682
Barcelona 856
Bari 476
Barina Bar, see Orinoco River 1165
Barney Point, see Gladstone 47
Barquito 182
Barranquilla 199
Barreiro, see Lisbon 786

INDEX

Barrosso Terminal, see Sao Sebastiao 120
Barrow-in-Furness 986
Barrow Island 33
Barry 986
Bartica, see Essequibo River 368
Barton, see Manchester 1017
Basrah 457
Bassens, see Bordeaux 296
Basseterre, Leeward Islands 607
Basse Terre, Guadeloupe 321
Bastia 295
Bata 273
Bataan 765
Batangas 765
Batang Lupar, see Sejingkat 641
Bathurst, see Banjul 326
Baton Rouge 1045
Batumi 946
Bay of Plenty, see Tauranga 699
Bayonne, France 295
Bayonne, N.J., see New York 1089
Bayou Cosotte, see Pascagoula 1093
Baytown 1045
Beaumont 1046
Beauty Point, see Launceston 52
Bec d'Ambes, see Bordeaux 296
Bedi Bunder 382
Bee Ness 1020
Beira 665
Beirut 601
Bejaia 2
Belawan 407
Belekeri 382
Belem 101
Belfast 986
Belgium 91
Belgorod-Dnestrovsky 947
Belize 95
Bell Bay, see Launceston 52
Belledune 138
Bellingham 1046
Belwaarde, see Paramaribo 879
Benghazi 611
Benicia 1046
Benin, Peoples' Republic of 96
Berbera 840
Berbice, see New Amsterdam 369
Berdyansk 947
Bergen 719
Bergs Harbour, see Stockholm 898
Bermuda 97
Berner's Bay, see Juneau 1075
Berre, see Marseilles 309
Berrys Bay, see Sydney, N.S.W. 66
Beypore, see Calicut 386
Beyrouth, see Beirut 601
Bhavnagar 383
Bilbao 857
Billingham, see Tees 1036
Bima 407
Binatang, see Sibu 642
Binnenhafen, see Kiel 337
Birkenhead, see Liverpool 1010
Bislig 767
Bissau 367
Bitung 408
Bizerte 931
Blaye, see Bordeaux 296
Blount Is., see Jacksonville 1074
Bluff 693
Blyth 987
Boca Chica 248
Boca Grande, Florida 1046
Boca Grande, see Jucaro 223
Bocas del Toro, see Almirante 741
Bodo 719
Bohavan, see Sandakan 640
Boke, see Conakry 365
Bolivia 99
Boma 1195
Bombay 383
Bonaberi, see Douala 136
Bonaire, see Netherlands Antilles 682
Bonaire Terminal 682
Bone, see Annaba 1
Bonny 706
Boom, see Brussels 92
Boqueron, see Guantanamo 219
Bora Bora 838
Borburata, see Puerto Cabello 1170
Bordeaux 296
Borssele, see Flushing 672
Bosporus, see Istanbul 938
Boston 1047
Botany Bay 35
Botas, see Golovasi 936
Botwood 138
Bougie, see Bejaia 2
Boulogne sur Mer 297
Bourgas 130
Bowen 35
Bowling, see Clyde Port 991
Brahestad, see Raahe 290
Braila, see Sulina 801
Brake 328
Brasil (Bonaire Terminal) 682
Brass River 709
Braviken, see Norrkoping 892
Brazil 100
Brazos, see Freeport, Texas 1065
Brega, see Marsa el Brega 615
Bremen 329
Bremerhaven 330
Brest 297
Brevik 720
Brewer, see Bangor 1044
Bridgeport 1051
Bridgetown, also see Late Reports 89
Bridgewater, N.S. 139
Bridlington 988
Brighton, Trinidad 925
Brindisi 477
Brisbane 36
Bristol 988
Brixham 989
Brofjorden 882
Bronnoysund 720
Brooklyn, see New York 1089
Broome 37
Brownsville 1051
Brunei 128
Brunsbuttel 331
Brunswick 1052
Brussels 92
Buchanan 608
Buckner Bay, see Nishihara, also see Late Reports 545
Bucksport, see Bangor 1044
Bude 989
Budge Budge, see Calcutta 384
Buenaventura 199
Buenos Aires 16
Bufadero, see Nuevitas 227
Buffalo 1053
Buffington, see Chicago 1054
Buka 752
Bukpyong, see Mukho 583
Bulgaria 130
Bullen Bay, also see Late Reports 684
Bulwer Is., see Brisbane 36
Bunbury 37
Bundaberg 37
Burea, see Skelleftehamn 896
Burela 859
Burma 132
Burnie 38
Burns Harbour 1053
Burnside, also see Late Reports 1053
Burutu 709
Bushire 440
Busselton 38
Butcher Island, see Bombay 383
Butzfleth 333
Buyukdere, see Istanbul 938

C

Cabanas, see Mariel 225
Cabedelo 102
Cabinda, also see Late Reports 4
Cabo Negro, see Punta Arenas 186
Cabo Rojo 249
Cabo Ruivo, see Lisbon 786
Cadiz 859
Caen 298
Cagayan de Oro 768
Cagliari 478
Caibarien 217
Cairns 38
Cajimaya, see Antilla 214
Calabar 710
Cala Figuera, see Mahon 866
Calais 299
Calcutta 384
Caldera 182
Caldera Bay, see Puntarenas 210
Calderilla 182
Caledonian Canal 990
Caleta Clarencia, see Punta Arenas 186
Caleta Cordova } see 27
Caleta Olivia } Comodoro 27
Caleta Olivares } Rivadavia 27
Calicut 386
Callao 757
Calumet, see Chicago 1054
Calvi 300
Cambodia 135
Camden, see Philadelphia 1094
Cameroon Republic 136
Campana 20
Campbeltown 990
Camp Lloyd, see Sondra Stromfjord 362
Canada 137
Canakkale 935
Canal Zone, see Panama 741
Canary Islands 175
Cannes 300

Canso Canal, see Port Hawkesbury and Strait of Canso 158
Canvey, see London 1012
Cap Haitien 370
Cape Cod Canal 1053
Cape Cuvier, see Carnarvon 39
Cape Lambert, see Port Walcott 64
Cape Lopez 322
Cape Verde Islands 178
Capetown 842
Cape St. Jacques, see Ho Chi Min City 1178
Caracas Bay 684
Caraquet 168
Cardenas 218
Cardiff 990
Cardon, see Punta Cardon 1173
Caripito 1136
Carmopolis 102
Carnarvon, W.A. 39
Caronte, see Marseilles 309
Carrickfergus 991
Cartagena, Colombia 201
Cartagena, Spain 859
Carteret, see New York 1089
Casablanca 662
Casilda, see Cienfuegos 218
Castellon de la Plana 860
Castle Island 1054
Castletown Bere 461
Castries 1184
Castro-Urdiales 861
Catania 478
Cavalla, see Kavalla 352
Cay Frances, see Caibarien 217
Cayo Diana, see Cardenas 218
Cayo Juan Claro, see Puerto Padre 227
Ceara, see Fortaleza 103
Cebu 768
Cedros Island, see Morro Redondo 655
Ceiba Hueca, see Manzanillo 224
Ceuta 862
Ceyhan, see Golovasi 936
Ceylon, see Sri Lanka 876
Chaguaramas 925
Chake Chake 914
Chalkis 348
Chalmette, see New Orleans 1087
Chalna 87
Champerico 363
Chanaral 182
Chancay 758
Changhang, see Kunsan 582
Char Bahar 441
Charleston 1054
Charlestown, Mass., see Boston 1047
Charlotte-Amalie, see St. Thomas, V.I. 1181
Charlottetown 139
Chatham, N.B. 139
Chatham, U.K., see Rochester 1019
Chekaa 601
Chelsea, Mass., see Boston 1047
Chelsea, N.Y., see New York 1089
Chemainus 139
Cherbourg 300
Cheribon, see Tjirebon 436
Chesapeake and Delaware Ship Canal, see Baltimore 1043
Chiba 507
Chicago 1054
Chicoutimi 140
Chile 179
Chimbote 758
Chim Wan, see Kin Wan 526
Chinese People's Republic 192
Chinhai, also see Late Reports 580
Chinnampo, see Nampo 578
Chiriqui, see Puerto Armuelles 750
Chisimaio 840
Chittagong 87
Christchurch, N.Z., see Lyttelton 694
Christiansted, see Limetree Bay 1179
Christmas Island 198
Chuk Samet Port, see Sattahip 920
Chungjin 578
Churchill 140
Cienfuegos 218
Cilacap, see Tjilitjap 434
Cinta Terminal 408
Ciudad Bolivar, see Orinoco River 1165
Ciudad Trujillo, see Santo Domingo 251
Civitavecchia 479
Clarenville 140
Clarence Cove, see Punta Arenas 186
Claveria, see Aparri 764
Cleveland 1055
Cliffe, see London 1012
Clifton Point, see Nassau 78
Clyde Port 991
Coatzacoalcos 652
Cobh, see Cork 461
Cochin 386
Cockatoo Island, see Sydney 66
Cockatoo Island, see Yampi Sound 73
Coco Solo, see Colon 743
Colchester 992
Colombia 199
Colombo 876
Colon 743
Colonia 1130
Come By Chance 141
Comodoro Rivadavia 27
Conakry 365
Concarneau 301
Concepcion, Chile, see Talcahuano 189
Concepcion del Uruguay 20
Conchan 759
Congo (Peoples Republic of) 205
Constable Hook, see New York 1089
Constantza 801
Constitucion 183
Contrecoeur 142
Coode Island, see Melbourne 54
Cook Islands 208
Coolkeeragh, see Londonderry 1015
Coos Bay 1058
Copenhagen 236
Coquimbo 183
Cordova 1058
Corfu 348
Corinth Canal, see Isthmia 350
Corinto 705
Cork 461
Corner Brook 142
Corniquel 314
Corojal, see Antilla 214
Coronel 183
Corpus Christi 1059
Corunna 862
Coryton, see London 1012
Cossack, see Port Walcott 64
Costa Rica 209
Cotonou 96
Courtenay Bay, see Saint John, N.B. 164
Covenas 202
Cowes 993
Crib Point, see Westernport, Vic. 71
Cristobal 744
Crofton 139
Cronstadt Island 925
Cruz Grande 183
Cuba 211
Cuddalore 387
Curacao, see Willemstad 688
Cutuco, see La Union 272
Cuxhaven 333
Cuyahoga, see Cleveland 1055
Cyprus 231
Cyrus Terminal 441

D

Dadiangas 769
Daepo, see Daipori 580
Dagenham, see London 1012
Dahomey, see Benin 96
Daipori 580
Dairen 194
Dakar 829
Dalhousie 143
Dammam 805
Dampier 40
Danang 1177
Danzig, see Gdansk 782
Dardanelles, see Canakkale 935
Dar-es-Salaam 914
Darius Terminal, see Kharg Island 442
Darling Harbour, see Sydney, N.S.W. 66
Dartmouth 993
Daru 752
Darwin 41
Das Island 968
Datu, see Sabah 639
Davao 769
Davis Point, see San Francisco 1106
Deauville, see Trouville 320
Deer Park 1060
Degema 710
Delair, see Philadelphia 1094
Delaware River, see Philadelphia 1094
Delfzijl 671
Demerara, see Georgetown 368
Denmark 234
Denofa, see Fredrikstad 722
Derby 43
Derince 935
Derna 611
Destrehan 1060
Detroit 1060
Devonport, Tasmania 43
Dhekelia 231
Diamante 21
Dicido, see Castro Urdiales 861
Diego Suarez 626
Dieppe 301

Digby 143
Dingle, see Liverpool 1010
Discovery Bay, see Port Rhoades 503
Divilacan, see Aparri 764
Dixon Island, see Port Walcott 64
Djakarta (Jakarta) 412
Djeno Terminal 205
Djibouti 247
Djuron, see Norrkoping 892
Doha 795
Dominican Republic 248
Donges, see Nantes 302
Dordrecht 672
Douala 136
Douro River, see Leixoes 785
Douglas, I.o.M. 993
Dover 994
Drammen 720
Drapetzona, see Piraeus 355
Dreines, see Trangisvaag 276
Drujba, see Bourgas 130
Dubai 970
Dublin 462
Dubrovnik 1190
Duluth 1061
Dumai 410
Dundalk, see Baltimore 1043
Dundee 995
Dunedin, see Otago 698
Dungun 629
Dunkirk 302
Dun Laoghaire 464
Durazzo, see Durres 1
Durban 843
Durres,
also see Late Reports 1

E

Eagle Point, see Philadelphia 1094
East Boston, see Boston 1047
Easter Island 183
Eastham, see Manchester 1017
East London 845
Eccles, see Manchester 1017
Eckernforde 334
Ecopetrol, see Cartagena 201
Ecuador 252
Edgewater, see New York 1089
Eemshaven 672
Egedesminde 359
Egersund 721
Egypt, Arab Republic of 258
Eilat 469
Einswarden, see Bremen 329
Eire, see Ireland 461
Ekenas 280
El Aaiun 875
El Alamein, see Marsa al Hamra 260
El Chaure 1138
El Guamache 1139
Elath, see Eilat 469
Electrona, see Hobart 50
Eleusis 349
Elizabeth, see New York 1089
El Jadida 662
Ellesmere Port, see Manchester 1017
Ellington, see Suva Outports 278
Ellinoperamaton, see Iraklion 350
El Palito 1139
El Salvador 271
El Segundo 1061
Elsfleth 334
Elsinore, see Helsingor 240
El Tablazo 1157
Emden 334
Emmastad, see Willemstad 688
Emu Bay, see Burnie 38
English Bay, see Vancouver 172
Ensenada de Mora,
see Manzanillo 224
Ensted 237
Enstedvaertkets, see Aabenraa 234
Equatorial Guinea 273
Eregli 935
Erie 1062
Es Sider 611
Esbjerg 237
Escombreras, see Cartagena 859
Escravos 710
Esmeraldas, see Balao Terminal 252
Esperance 43
Esquimalt, see Victoria, B.C. 173
Essequibo River (Bartica) 368
Essvik, see Sundsvall 901
Estaque, see Marseilles 309
Etajima 508
Etang de Berre,
see Marseilles 309
Eten 759
Ethiopia 274
Eureka 1063
Europoort, see Rotterdam 674
Everett, Mass., see Boston 1047
Everett, Wash. 1064
Everton, see New Amsterdam 369
Evripos Strait, see Chalkis 348

F

Faeringehavn 359
Faial, see Horta 75
Falconara, see Ancona 472
Falkland Islands 852
Fall River 1064
Falmouth 996
Famagusta 231
Fao 458
Farge, see Bremen 329
Faroe Islands 276
Faslane, see Clyde Port 991
Fateh Terminal 971
Faversham 1020
Fawley, see Southampton 1028
Fayal, see Horta 75
Fecamp 303
Felixstowe 996
Felton, see Antilla 214
Ferndale 1064
Ferrol 863
Figueira da Foz 785
Fiji Islands 278
Finland 280
Finnart, see Clyde Port 991
Fisherman's Island, see Brisbane 36
Fishguard 997
Fiumicino 480
Flaxenvik, see Stockholm 898
Fleetwood 997
Flensburg 335
Floro 721
Flotta, see Scapa Flow 1026
Flushing 672
Forcados,
also see Late Reports 711
Fortaleza 103
Fort Dauphin 626
Fort de France 647
Fort Denison, see Sydney 66
Fort Lauderdale,
see Port Everglades 1098
Fort Mifflin, see Philadelphia 1094
Fort Pierce 1064
Fort William,
see Lakehead Harbour 147
Fos-sur-Mer, see Marseilles 312
Fowey 998
Foynes Harbour } see Shannon
Foynes Island } Estuary 446
France 295
Fraser Port 144
Fray Bentos 1130
Fredericia 238
Frederikshab 359
Frederikshavn 238
Frederiksted 1179
Fredriksskans, see Gavle 883
Fredrikstad 722
Freeport, Bahamas 77
Freeport, Bermuda, see Hamilton 97
Freeport, Texas 1065
Freetown 831
Fremantle 44
French Antilles 321
Frenchman's Bay, see Albany 32
Friendly Islands 924
Frobisher Bay 144
Frontignan, see Sete 317
Fuik Bay 685
Fujairah 972
Fukuyama 509
Funafuti 346
Funchal 625
Funivie, see Savona 495
Fushiki 510

G

Gabon 322
Gaeta 480
Galata, see Istanbul 938
Galatz, see Sulina 801
Galena Park 1065
Galeota Point 925
Galle 876
Galvan, see Bahia Blanca 25
Galveston 1065
Galway 464
Gamba 322
Gambia 326
Garrucha 863
Garston 998
Gashaga, see Stockholm 898
Gaspe 144
Gastgivarehagen, see Norrkoping 892
Gateshead, see Tyne District 1037
Gavilan Point, see Zamboanga 780
Gavle 883
Gazenica, see Zadar 1192
Gdansk 782
Gdynia 782
Geelong 45
Gefle, see Gavle 883

Geismar 1066
Gela 481
Gellibrand, see Melbourne 54
General San Martin 759
General Santos City, see Dadiangas 769
Genoa 481
Geographe Bay, see Busselton 38
Georgetown, Ascension Island 852
Georgetown, Guyana 368
Geraldton 46
Geras Bay, see Mitylene 354
Germany, Democratic Rep. 327
Germany, Federal Rep. 328
Gerona, Cuba, see Nueva Gerona 226
Gerona, Spain, see San Feliu 870
Ghana 342
Ghent 93
Gibara, see Vita 230
Gibraltar 345
Gijon 863
Gilbert and Ellice Islands 346
Gillingham, see Rochester 1019
Girard Point, see Philadelphia 1094
Giresun 936
Gisborne 694
Gizan, see Jizan 809
Gizo 839
Gladstone 47
Glasgow, see Clyde Port 991
Glebe Is., see Sydney 66
Glomfjord 722
Gloucester, see Philadelphia 1094
Gloucester, U.K. 1028
Godhavn 360
Godthab 360
Golfito 209
Golluk 936
Golovasi 936
Good Hope 1066
Goole 998
Goose Bay 145
Gorda, see Baracoa 216
Gore Bay, see Sydney 66
Goritsa Bay, see Corfu 348
Gosport, see Portsmouth 1024
Goteborg, see Gothenburg 884
Gothenburg 884
Gotland Is., see Slite 897
Gove 48
Gramercy 1066
Gran Canaria, see Las Palmas 175
Grangemouth 999
Granton 1000
Granville 304
Grays, see London 1012
Grays Harbor 1066
Greece 347
Green Bay 1066
Greenhithe, see London 1012
Greenland 359
Greenock, see Clyde Port 991
Greenwich Point, see Philadelphia 1094
Gregorio, see Punta Arenas 186
Gretna, see New Orleans 1087
Grigorevsky 948
Grimsby 1000
Groningen 673
Groote Eylandt 48
Groton, see New London 1087
Gruz Harbour, see Dubrovnik 1190
Guacolda, see Huasco 184
Guadeloupe 321
Guaiba Island, see Sepetiba Terminal 123
Guam 646
Guanica 789
Guanta 1141
Guantanamo 219
Guatemala 363
Guayabal, see Santa Cruz del Sur 228
Guayacan 183
Guayama, see Las Mareas 789
Guayanilla 789
Guayaquil 254
Guayas River, see Guayaquil 254
Guimaras, see Iloilo 772
Guinea 365
Guinea Bissau 367
Guiria, see Caripito 1136
Gulfhavn 239
Gulfport, Mississippi 1067
Gulfport, N.J., see New York 1089
Guyana 368

H

Hachinoe, see Hachinohe 510
Hachinohe 510
Haderslev 240
Haeju 578
Hafnagardur, see Sigulufjord 380
Haifa 470
Haijuube, see Haeju 578
Haines 1067
Haiphong 1177
Haiti 370
Hakata 511
Hakodate 512
Halat al Mubarras, see Mubarras Island 978
Halden 723
Haldia 388
Halifax 145
Halling, see Rochester 1019
Hallstavik 885
Halmstad 885
Halul Island 795
Hamble, see Southampton 1028
Hamburg 336
Hamilton, Bermuda 97
Hamilton, Ontario 146
Hamilton, Queensland, see Brisbane 36
Hamina 280
Hammerfest 723
Hampton Roads District 1067
Hamra, see Marsa-al-Hamra 260
Hamrawein 260
Hamriya, see Dubai 970
Hanko 280
Hannan Port, see Sakai 553
Hantsport 146
Haraholmen, see Pitea 896
Haramidere, see Istanbul 938
Harbour Grace 146
Harburg, see Hamburg 336
Hargshamn 885
Harnosand 886
Harstad 723
Hartlepool 1001
Harwich 1001
Hastings, N.Y., see New York 1089
Havana 219
Hawkins Point, see Baltimore 1043
Haydarpasa, see Istanbul 938
Hay Point 49
Heianza Is., see Kin Wan 526
Helmi, see Raahe 290
Helsingborg 886
Helsingor 240
Helsinki 281
Hemixem, see Antwerp 91
Henecan 372
Hepokari, see Uusikaupunki 293
Heraklion, see Iraklion 350
Hercules, see San Francisco 1106
Hernosand, see Harnosand 886
Heroya 723
Herradura Bay, see Guayacan 183
Herttoniemi Harbour, see Helsinki 281
Heysham 1002
Higashi, see Niigata 543
Hikoshima, see Shimonoseki 557
Hilo 1068
Himeji 513
Hirohata, see Himeji 513
Hiroshima 514
Hitachi 515
Hobart 50
Hoboken, see New York 1089
Ho Chi Min City 1178
Hodeidah 1187
Hoganas 886
Hog Island, see Philadelphia 1094
Holehaven, see London 1012
Holmsund, see Umea 903
Holsteinsborg 360
Holtenau 337
Holyhead 1003
Holyrood, see St. John's, Newfoundland 165
Homer 1069
Honam, see Inchon 580
Honavar 388
Hondagua 771
Honduras 372
Honfleur 304
Hong Kong 374
Honiara 839
Honolulu 1069
Horie, see Matsuyama 535
Hornefors 887
Hornillo 854
Horsens 240
Horta 75
Horten 724
Hososhima 515
Hound Point 1003
Houston 1071
Hovic, see Limetree Bay 1179
Hoyanger 724
Hsinkang, also see Taku Bar 194
Huacho 759
Hualien 910
Huarmey 759
Huasco 184
Hudiksvall 887
Hudson River, see New York 1089
Huelva 865
Hueneme 1073
Hull 1003
Humbermouth, see Corner Brook 142

Humbolt Bay, see Eureka 1063
Huron 1073
Husnes 724

I

Ibicuy 21
Ibiza 866
Iceland 379
Igarka 948
Iggesund, see Hudiksvall 887
Iho 515
Ijmuiden 674
Ile Rousse 304
Ilha Barnabe, see Santos 116
Ilheus 103
Ilichevsk 948
Iligan 771
Ilo 759
Iloilo 772
Imabari 516
Imahuru, see Imabari 516
Imatra Kaukopaa, see Saimaa Canal 290
Imbituba 104
Immingham 1005
Ince, see Manchester 1017
Inchon 580
India 382
Indiana Harbour, see Burns Harbour 1053
Indonesia 401
Ingeniero, see La Plata 21
Ingeniero White, see Bahia Blanca 25
Inkoo 283
Innisfail 51
Innoshima 517
Inokuchi, see Omishima 548
Inspection Head, see Launceston 52
Invergordon 1006
Inverness 1007
Ipswich 1007
Iquique 184
Iraklion 350
Iran 437
Iraq 456
Ireland (Republic of) 461
Ireland Is., see Hamilton 97
Isabela de Sagua 222
Isafjord 379
Ishinomaki 517
Iskenderun 938
Isla d'Agua, see Rio de Janeiro 108
Isla de Pinos, see Nueva Gerona 226
Isle of Grain 1019
Isle of Sheppey, see Sheerness 1018
Israel 469
Istanbul 938
Isthmia 350
Istinye, see Istanbul 938
Itajai 104
Italy 472
Itaqui, see Sao Luiz 119
Itea 351
Itozaki, see Onomichi 550
Ivigtut 360
Ivory Coast 498
Iwaki, see Onahama 549
Iwakuni 517
Izmail 949
Izmir 940

J

Jacksonville 1074
Jakarta 412
Jakhau 388
Jakobshavn 361
Jakobstad 283
Jamaica 500
Jamestown, St. Helena 852
Japan 505
Jarrow, see Tyne District 1037
Jazttzarakku Island, see Zirkhu Island 983
Jebel Ali 975
Jebel Dhanna 972
Jeddah 806
Jersey City, see New York 1089
Jesselton, see Kota Kinabalu 629
Jibouti 247
Jinhai, see Chinhai 580
Jizan 809
Joao Pessoa, see Cabedelo 102
Jobos 789
Joensuu, see Saimaa Canal 290
Johannedal, see Sundsvall 901
Jolo 774
Jordan 576
Jose Panganiban 774
Ju'aymah 809
Jubail, also see Late Reports 814
Jucaro 223
Julianehab 361
Juneau 1075
Jurong, see Singapore 834

K

Kage, see Skelleftehamn 896
Kagoshima 518
Kahului 1075
Kainan, see Shimotsu 558
Kakinada 388
Kakogawa 519
Kalajoki, see Raahe 290
Kalamata 351
Kalaranta, see Uusikaupunki 293
Kalifoka, see Corfu 348
Kali Limenes 352
Kalix Haparanda, see Karlsborgsverken 888
Kalmar 888
Kalundborg 241
Kamaishi 519
Kamsar, see Port Kamsar 365
Kanda 520
Kandla 389
Kangaroo Is., see Ballast Head 33
Kanmon-Ko 520
Kanokawa 520
Kantvik, see Porkkala 288
Kaohsiung 910
Kaolack 829
Karachi 740
Karadeniz Eregli, see Eregli 935
Karavostassi 231
Karimunting, see Sandakan 640
Karlsborgsverken 888
Karlshamn 888
Karlskrona 889
Karlstad 889
Karskar, see Gavle 883
Karwar 390
Kashima 521
Kasim Terminal, see Sorong 431
Kaskinen, see Kasko 284
Kasko 284
Kaskoy, see Istanbul 938
Kastrades, see Corfu 348
Katakolon 352
Katsini Bay, see Aghios Nikolaos 347
Kaukas, see Saimaa Canal 290
Kaur, see Banjul 326
Kavalla 352
Kavieng 753
Kawaihae, see Hilo 1068
Kawasaki 521
Keelung 911
Kefalomandouko, see Corfu 348
Keflavik 379
Kelang, see Port Kelang 637
Kemi 284
Kenitra 663
Kenya 577
Kerain, see Norrkoping 892
Kerasunda, see Giresun 936
Keratsini, see Piraeus 355
Kerkyra, see Corfu 348
Ketchikan 1075
Kharg Island 442
Khemco Terminal, see Kharg Island 442
Kherson 949
Khmer Republic, see Cambodia 135
Kholmsk 950
Khor-al-Amaya 459
Khor Dubai, see Dubai 970
Khor-el-Mufatta 589
Khor Fakkan 975
Khor Musa, see Bandar Mahshahr 438
Khorramshahr 448
Khrysokhou Bay, see Latchi 232
Khulna, see Chalna 87
Kidjang 413
Kiel 337
Kiel Canal 338
Kieta 753
Kiire 523
Kikuma 523
Kilia 951
Killingholme 1005
Kill Van Kull, see New York 1089
Killybegs 465
Kimbe 753
Kimitsu 524
Kings Bay 1076
Kings Lynn 1008
Kingsnorth 1021
Kingston, Jamaica 500
Kingston, Ontario 147
Kingstown 1184
Kinuura 525
Kin Wan 526
Kipevu, see Mombasa 577
Kirkenes 724
Kisarazu, see Kimitsu 524
Kishon, see Haifa 470
Kismayu, see Chisimao 840
Kitakyushu, see Moji 538
Kitimat 147
Klaipeda 951
Klakksvik 276

Klang, see Port Kelang 637
Kleven, see Mandal 727
Klintehamn 890
Kobe 528
Kodiak 1076
Koge 242
Kohani, see Mkoani 915
Kohsichang 918
Kokkola 284
Koko, see Sapele 717
Kokura 531
Kolding 242
Kolo Harbour, see Karlshamn 888
Komatsushima 532
Kompongsom 135
Koolan Island, see Yampi Sound 73
Koper 1190
Koping 890
Korea (North) 578
Korea (South) 580
Kota Kinabalu 629
Kotka 284
Koverhar 285
Kowloon, see Hong Kong 374
Kpeme 922
Kragero 725
Kralendijk 685
Kribi 136
Kristiansand S. 725
Kristiansund N. 725
Kristinestad 285
Kuala Rompin, see Rompin 639
Kubikenbork, see Sundsvall 901
Kuching 630
Kudamatsu 532
Kudat, see Sabah 639
Kunak 631
Kunsan 582
Kuntaur, see Banjul 326
Kuopio, see Saimaa Canal 290
Kure 533
Kurnell, see Botany Bay 35
Kushiro 534
Kutubidia, see Chittagong 87
Kuwait 589
Kuwait (Harbour), see Shuwaikh 597
Kvarnholmen, see Stockholm 898
Kwinana, see Fremantle 44
Kyndby 242

L

Laajasalo Harbour, see Helsinki 281
Laayoune, see El Aaiun 875
Labasa, see Suva Outports 278
Labuan 631
Labuantring Bay 415
La Ceiba, see Late Reports
La Chimba Cove, see Antofagusta 180
La Chiva, see Antilla 214
La Estacada 1153
La Goulette 931
La Guaira 1142
La Libertad, Ecuador 254
La Libertad, El Salvador 271
La Mede, see Marseilles 309
La Nouvelle 304
La Pallice 305
La Pampilla 760
La Plata 21
La Rochelle 305
La Romana 249
La Salina 1143
La Skhirra 932
La Spezia 485
La Teja, see Montevideo 1130
La Union 272
Lacustre, see La Salina 1154
Lae 753
Laem Chabang, see Bangkok 918
Lagos 712
Lahad Datu, see Sabah 639
Lake Charles 1076
Lakehead Harbour 147
Lambasa, see Suva Outports 278
Lampung, see Panjang 418
Landskrona 890
Langror, see Soderhamn 897
Lapaluoto, see Raahe 290
Lappeenranta, see Saimaa Canal 290
Larnaca 231
Larne 1008
Larvik 726
Las Mareas 789
Las Minas, see Bahia Las Minas 742
Las Palmas, 175
  also see Late Reports
Las Piedras Paraguana,
  see Amuay Bay 1134
Las Salinetas 176
Latchford, see Manchester 1017
Latchi 232
Lattakia 907
Launceston 52
Laurium, see Lavrion 352
Lautoka 278
Lavan Island 450
Lavera, see Marseilles 309
Lavrion 352
Lazareta, see Syros 356
Lazaro Cardenas 653
Lebanon 601
Leeward Islands 607
Legaspi (Legazpi) 775
Leghorn, see Livorno 486
Le Havre 305
Leith 1009
Leixoes 785
Lenadura, see Punta Arenas 186
Leningrad 952
Lerwick 1009
Levuka 278
Liberia 608
Libreville 323
Libya 610
Lilleborg, see Fredrikstad 722
Lillesand 726
Limassol 232
Limbang 633
Lime Island, see Sault St Marie 166
Limerick 465
Limetree Bay 1179
Limni Mines, see Latchi 232
Linden, Guyana 369
Linden, see New York 1089
Lindoe, see Odense 244
Lindsey, see Immingham 1005
Lingga, see Sejingkat 641
Lisbon 786
Little Aden, see Aden 1188
Liverpool 1010
Livorno 486
Lizaret, see Toulon 320
Lobito 5
Locust Point, see Baltimore 1043
Lome 922
London 1012
Londonderry 1015
Londunarbryggja, see Siglufjord 380
Long Beach 1077
Longview 1079
Lorengau 754
Lorient 308
Los Angeles 1080
Lota 185
Loudden, see Stockholm 898
Louholmen, see Pitea 896
Lowestoft 1016
Luanda 5
Lubeck 338
Lucina Marine Terminal 324
Lulea 890
Lumut 633
Lutong, see Miri 634
Lysekil 891
Lyttelton 694
Lytton, see Brisbane 36

M

Maaloy 727
Macapa, see Santana 114
Macassar, 415
  also see Late Reports
Malabo, see Rey Malabo 273
Maceio 104
Mackay 52
Mackenzie, see Linden 369
Macoris, see San Pedro de Macoris 251
Madagascar,
  see Malagasy Republic 626
Madang 755
Madeira 625
Madras 391
Madre de Deus, see Salvador 112
Madryn, see Puerto Madryn 29
Magallanes, Bay, see Masao 777
Magazine Point, see Mobile 1084
Magellan Straits, see Punta Arenas 186
Magnisi, see Augusta 475
Magpetco 1082
Mahe, see Port Victoria 830
Mahon 866
Maizuru 534
Majunga 626
Makassar, see Macassar 415
Malacca 633
Malaga 866
Malagasy Republic 626
Malamocco, see Venice 497
Malaysia 629
Malili 416
Malmo 891
Malongo, see Cabinda 4
  also see Late Reports
Maloy, see Maaloy 727
Malta 645
Malus Is., see Dampier 40
Mamonal, see Cartagena 201
Manati, see Puerto Padre 227
Manaus 105
Manchester 1017
Mandal 727

Mandoukion, see Corfu 348
Mandvi 392
Manfredonia 487
Mangalore, see New Mangalore 395
Mangalore (Minor Port) 392
Mankasa 416
Mangla, see Chalna 87
Manguinhos, see Rio de Janeiro 108
Manila 775
Manopla, see Santa Cruz del Sur 228
Manta 255
Mantyluoto 285
Manukau Harbour, see Onehunga 697
Manzanillo, Cuba 224
Manzanillo, Dominican Republic 249
Manzanillo, Mexico 654
Maputo 665
Maqal, see Basrah 457
Maracaibo 1155
Maracaibo Lake 1143
Mararuni, see Georgetown 368
Marcus Hook, see Philadelphia 1094
Mar del Plata 28
Marghera, see Venice 497
Marianas Islands 646
Mariehamn 286
Mariel 225
Marmagoa, see Mormugao 393
Marmorilik 361
Marrero, see New Orleans 1087
Marsa al Hamra 260
Marsa al Hariga 614
Marsa el Brega 615
Marsaxlokk, see Valletta 645
Marsden Point, see Whangarei 703
Marseilles 309
Martin Garcia, see River Plate 13
Martinez, see San Francisco 1106
Martinique 647
Maryborough 53
Masan 582
Masao 777
Masbate 778
Masnedsund, see Vordingborg 246
Massawa 274
Matadi 1195
Matanzas, Cuba 226
Matanzas, Orinoco River 1167
Matarani 760
Mategata, see Imabari 516
Matias de Galvez, see Santo Tomas 364
Matsunaga, see Onomichi 550
Matsuyama 535
Maturin Bar, see Caripito 1136
Mauritania 648
Mauritius 651
Mayaguez 791
Mazagan, see El Jadida 662
Mazatlan 654
Medan, see Belawan 407
Mede, see Marseilles 309
Media Luna, see Manzanillo 224
Medway 1018
Mega, see Himeji 513
Megara 353
Mejillones 186
Melbourne 54
Melilla 663
Melville Bay, see Gove 48
Menstad, see Skien 731
Mersin 941
Messina 487
Metlakatla 1082
Mexico 652
Mezen 952
Miami 1082
Middlesbrough, see Tees 1036
Mihara, see Onomichi 550
Miike 536
Milazzo 487
Milford Haven 1021
Milhaud, see Toulon 320
Milner Bay, see Groote Eylandt 48
Milos Island 353
Milwaukee 1083
Mina Abdulla 589
Mina al Ahmadi 591
Mina al Bakir, see Albakr Terminal 456
Mina al Fahal 736
Mina Jebel Ali 975
Mina Khalid, see Sharjah 982
Mina Qaboos, see Port Qaboos 736
Mina Raysut, see Port Raysut 738
Mina Saqr 976
Mina Saud 594
Mina Sulman 82
Mina Zayed 977
Minatitlan 655
Miragoane 370
Miramar, see Belem 101
Miri 634
Mispec Point, see Saint John, N.B. 164
Misumi 536
Misurata, see Qasr Ahmed 617
Mitkof Is., see Petersburg 1094
Mitre Canal, see River Plate 13
Mitylene 354
Miyako 537
Mizushima 537
Mjimwema 915
Mkoani 915
Moa, see Baracoa 216
Moanda, see Banana 1194
Mobile 1084
Mocamedes 6
Mocka 1187
Modewheel, see Manchester 1017
Moengo 879
Mogadiscio 840
Mohammedia 663
Moin Bay, see Puerto Limon 209
Mo-i-Rana 727
Moji 538
Mokpo 583
Molde 728
Mombasa 577
Monaco 661
Money Point, see Shannon Estuary 466
Monfalcone 488
Mongstad 728
Moni 233
Monrovia 608
Montedison, see Brindisi 477
Montego Bay 501
Montevideo 1130
Montijo, see Lisbon 786
Montoir, see Nantes 312
Montreal 148
Montrose 1022
Morehead City 1085
Moreton Bay, see Brisbane 36
Mormugao 393
Morocco 662
Moron 1161
Morro Redondo 655
Mort Bay, see Sydney 66
Mosjoen 728
Mossel Bay 846
Mostaganem 3
Motril 867
Mount Maunganui, see Tauranga 699
Mourilyan 51
Moville, see Londonderry 1015
Mozambique 665
Mozambique (Port) 667
Mtwara 916
Muara Port 128
Mubarek Terminal 977
Mubarras Island 978
Mucuripe, see Fortaleza 103
Muelle de Hierro, see Bahia Blanca 25
Muftiyah, see Basrah 457
Mukho 583
Multedo, see Genoa 481
Mundra 393
Munkedal, see Lysekil 891
Muntok 417
Murmansk 953
Muroran 540
Musel, see Gijon 863
Musi Bar, see Palembang 417
Mustola Harbour, see Saimaa Canal 290
Mutrah, see Port Qaboos 736
Mutsure, see Shimonoseki 557
Mykonos 354
Myrtle Grove 1085

N

Naadendaal, see Turku 292
Naantali 286
Nacala 667
Naestved 243
Nagapattinam 393
Nagasaki 541
Nagoya 541
Naha 542
Naikorokoro, see Suva Outports 278
Nakhodka 954
Nakskov 243
Nampo 578
Namsos 729
Nanaimo 151
Nanchital 655
Nanisivik 151
Nantes 312
Naoetsu 543
Naoshima 543
Napier 695
Naples 488
Narovik, see Keflavik 379
Narssarssuaq 361
Narvik 729
Naryan-Mar 955
Nasipit, see Masao 777
Nassau 78
Natal 105
Nauru Island 669
Navarino Bay, see Pylos 355
Navlakhi 394
Nawiliwili 1085
Necochea, see Quequen 30

Negishi, see Yokohama 572
Neiafu, Tonga, see Nuku'alofa 924
Nelson 696
Neskaupstadur 379
Netherlands 670
Netherlands Antilles 682
Nevelsk 956
New Amsterdam 369
Newark, see New York 1089
New Bedford 1086
New Caledonia 691
Newcastle, N.B. 139
Newcastle, N.S.W. 57
Newcastle-on-Tyne, see Tyne District 1037
New Guinea, see **Papua New Guinea** 751
Newhaven, U.K. 1023
New Haven, Conn. 1086
New Hythe, see Rochester 1019
New Jersey, see New York 1089
New London 1087
New Mangalore 395
New Nickerie 879
New Orleans 1087
New Plymouth 696
Newport, I.O.W., see Cowes 993
Newport, Gwent 1023
Newport News, see Hampton Roads District 1067
New Ross 465
New Westminster, see Fraser Port 144
New York 1089
New Zealand 692
Nha-Be, see Ho Chi Min City 1178
Niah, see Sarawak Coastal Ports 641
Nicaragua 705
Nicaro, see Antilla 214
Nice, also see Late Reports 313
Niedersachsenbrucke, see Wilhelmshaven 339
Nigeria 708
Niigata 543
Niihama 544
Nikiski 1090
Niquero, see Manzanillo 224
Nishihara, also see Late Reports 545
Nissyros, see Yali Island 358
Njarovik 379
Nordenham 338
Nordfjordur, see Neskaupstadur 379
Nordhafen, see Kiel 337
Norfolk, see Hampton Roads District 1067
Norra Nyhann, see Sundsvall 901
Norrkoping 892
Norrsundet 893
Northern Ireland, see **United Kingdom** 984
North Shields, see Tyne District 1037
North Star Bugt 362
North Sydney, N.S. 151
Northville, see Riverhead, N.Y. 1104
Norway 718
Nouadhibou 648
Nouadhibou Harbour 649
Nouakchott 650
Noumea 691
Novorossiysk 956
Norwuz Terminal, see Ras Bahregan 453
Nueva Gerona 226
Nueva Palmira 1133
Nuevitas 227
Nuku'alofa 924
Nuottaasari, see Oulu 286
Nyborg 243
Nyhamn, see Gavle 883
Nykobing 243
Nykoping 893
Nynashamn 894

O

Oakhamness, see Kingsnorth 1021
Oakland 1090
Obbala, see Umea 903
Ocean Falls 152
Ocean Island, see Banaba 86
Ocho Rios 502
Odense 244
Odessa 957
Ofunato 546
Ogdensburg 1091
Ohita, see Oita 547
Ohmishima, see Omishima 548
Oita 547
Okha 395
Okinawa (Kin Wan) 526
Okinawa (Naha) 542
Okrika, see Port Harcourt 715
Okubo, see Moji 538
Olbia 489
Old Kilpatrick, see Clyde Port 991
Oljysatama, see Turku 292
Olympia 1091
Oman (Sultanate of) 736
Omishima 548
Onahama 549
Onega 958
Onehunga 697
Onomichi-Itozaki 550
Onton, see Castro Urdiales 861
Oporto 785
Opua 697
Oran 3
Orange 1091
Oranjestad 686
Orinoco River 1165
Oristano Bay, also see Late Reports 490
Ornskoldsvik 894
Oro Bay 755
Orrington, see Bangor 1044
Orrskar, see Soderhamn 897
Ortviken, see Sundsvall 901
Orviken, see Skelleftehamn 896
Osaka 550
Oshawa 152
Oskarshamn 894
Oslo 729
Ostend 93
Ostermoor, see Brunsbuttel 331
Ostrand, see Sundsvall 901
Ostrica 1091
Oswego 1092
Otago 698
Otaru 551
Otterbacken 895
Otterham 1021
Oulu 286
Ovendo, also see Late Reports 324
Owase 552
Oxelosund 895
Oxhaga, see Karlshamn 888
Oxnard, see Hueneme 1073
Ozol, see San Francisco 1106

P

Pacasmayo 760
Padang, see Telak Bayur 434
Pahang, see Rompin 639
Paita 761
Pajaritos, see Coatzacoalcos 652
Pakistan 740
Palamos 868
Palembang 417
Palenque 250
Palermo 490
Palm Beach 1092
Palma, Majorca 868
Palo Alto, see Jucaro 223
Palua 1167
Pamatacualito, see Pertigalete 1170
Pamfyllon, see Mitylene 354
Pampushamnen, see Norrkoping 892
Panama 741
Panama Canal 745
Panama City 1093
Panambur, see New Mangalore 395
Panarukan 418
Panay, see Iloilo 772
Panjang 418
Panga, see Nuku'alofa 924
Pangkalan Susu 419
Pangkalbalam 420
Pantalan of Assesa, see Tarragona 872
Papeete 838
Papua New Guinea 751
Papupandan, see Iloilo 772
Para, see Belem 101
Paradip 395
Paramaribo 879
Paranagua 106
Paranam 880
Pargas 287
Paris 313
Parkeston Quay, see Harwich 1001
Partington, see Manchester 1017
Pasadena 1093
Pasajes 868
Pascagoula 1093
Pasir Gudang, see Late Reports
Pasir Panjang, see Singapore 834
Pastelillo, see Nuevitas 227
Pateniemi 288
Patillos Cove, see Iquique 184
Patras 354
Patreksfjordur 379
Pauillac, see Bordeaux 296
Paulsboro, see Philadelphia 1094
Pavitt Point, see Sandakan 640
Payardi, see Bahia Las Minas 742
Paysandu 1133
Peanut Is., see Palm Beach 1092
Pearl Harbour, see Honolulu 1069
Pemba, Mozambique 667
Pemba, Tanzania, see Wete 916
Pembroke, see Milford Haven 1021
Penang 635
Penarth, see Cardiff 990

Pending Point, see Kuching 630
Pennington Terminal 713
Pennsauken, see Philadelphia 1094
Pensacola 1094
Pepel 833
Perama, see Piraeus 355
Pernambuco, see Recife 107
Pernis, see Rotterdam 674
Perth Amboy, see New York 1089
Pertigalete 1170
Peru 757
Petersburg 1094
Petit Couronne, see Rouen 314
Philadelphia 1094
Philipsburg 687
Philippeville, see Skikda 3
Philippines 764
Phuket 919
Picton 698
Pictou 152
Pietarsaari, see Jakobstad 283
Pilon, see Manzanillo 224
Pimentel 761
Piney Point 1095
Pinkenba, see Brisbane 36
Pinos Island, see Nueva Gerona 226
Piombino 490
Piraeus 355
Pir Pau, see Bombay 383
Pisco, see General San Martin 759
Pitch Point, see Sobo 930
Pitea 896
Pitsundet, see Pitea 896
Pladju, see Palembang 417
Ploce 1191
Plymouth 1024
Pohang 584
Point Breeze, see Philadelphia 1094
Point Central, see Nouadhibou 648
Point Comfort 1100
Point Fortin 928
Point Lisas 929
Point Samson, see Port Walcott 64
Point Tupper, see Port Hawkesbury 158
Pointe-a-Pierre 928
Pointe-a-Pitre 321
Pointe Clairette, see Cape Lopez 322
Pointe des Galets 800
Pointe Noire 206
Poland 782
Poleng 420
Polynesie Francaise, see Society Islands 838
Pomalaa 420
Ponce 792
Pondicherry 396
Ponnani, see Calicut 386
Ponta Delgada 75
Poole 1024
Porbandar 397
Pori, see Mantyluoto 285
Porkkala 288
Porsgrunn, see Heroya 723
Port Adams 1095
Port Adelaide, see Adelaide 32
Port Alberni 153
Port Alfred 153
Port Alice 153
Port Allen, Hawaii, see Nawiliwili 1085
Port Allen, La., see Baton Rouge 1045
Port Alma, see Rockhampton 65
Port Angeles 1095
Port Arthur, Ontario, see Lakehead Harbour 147
Port Arthur, Texas 1095
Port Augusta 58
Port-au-Prince 370
Port Balchik, see Varna 130
Port Bouet, see Abidjan 498
Port Canaveral 1097
Port Cartier 154
Port Chalmers, see Otago 698
Port Colborne 157
Port Covington, see Baltimore 1043
Port Dalhousie 157
Port de Berre, see Marseilles 309
Port de Bouc, see Marseilles 309
Port de la Mede, see Marseilles 309
Port de Lavera, see Marseilles 309
Port Dickson 636
Port Elizabeth 846
Port Esquivel 502
Port Etienne, see Nouadhibou 648
Port Everglades 1098
Port Gentil 324
Port Giles 58
Port Harcourt 715
Port Hawkesbury and Strait of Canso 158
Port Hedland 58
Port Huon, see Hobart 50
Port Huron, Michigan 1098
Port Irene, see Aparri 764
Port Jackson, see Sydney 66
Port Jerome, see Rouen 314
Port Kaiser 503
Port Kamsar 365
Port Kelang 637
Port Kembla 61
Port Latta 62
Port Lavaca 1100
Port Lincoln 62
Port Louis 651
Port Manati 227
Port Melbourne, see Melbourne 54
Port Meneng, see Banyuwangi 406
Port Moody, see Vancouver 172
Port Moresby 755
Port Natal, see Durban 843
Port Neches 1101
Port Nelson, see Nelson 696
Port Nessebar, see Bourgas 130
Port Newark, see New York 1089
Port Newport, see Melbourne 54
Port of Spain 929
Port Percy, see Punta Arenas 186
Port Phillip, see Melbourne 54
Port Pirie 62
Port Purcell 1181
Port Qaboos 736
Port Qasim, see Karachi 740
Port Rashid 981
Port Raysut 738
Port Redi 397
Port Rhoades 503
Port Richmond, see Philadelphia 1094
Port Royal, see Kingston 500
Port St. Joe 1101
Port Said, see Suez Canal 263
Port San Luis 1101
Port Socony, see New York 1089
Port Stanley 852
Port Stanvac 63
Port Sudan 878
Port Sulphur 1101
Port Sutton, see Tampa 1113
Port Swettenham, see Port Kelang 637
Port Talbot 1025
Port Tampa, see Tampa 1113
Port Taranaki, see New Plymouth 696
Port Topolly, see Varna 130
Port Trinidad, see Cienfuegos 218
Port Tudy, see Lorient 308
Port Vendres 313
Port Victoria 830
Port Walcott 64
Port Weller 160
Port Whangarei, see Whangarei 703
Portishead, see Bristol 988
Portland, Me. 1099
Portland, Ore. 1099
Portland, Vic. 64
Porto Alegre, 107
also see Tramandai 123
Porto Amelia, see Pemba 667
Porto Branolao, see Lisbon 786
Porto dos Buchos, see Lisbon 786
Porto Empedocle 491
Porto Foxi, see Cagliari 478
Porto Grande, see St. Vincent 178
Porto Marghera, see Venice 497
Porto Saco, see Mocamedes 6
Porto Torres 491
Porto Varna-West, see Varna 130
Porto Vesme 491
Portocel 107
Portsmouth, Dominica 1185
Portsmouth, U.K. 1024
Portsmouth, Va., see Hampton Roads District 1067
Portugal 785
Porvoo 288
Poti 959
Powell River 160
Pozos Colorados Terminal 203
Prai, see Penang 635
Praia Formosa, see Funchal 625
Prescott 161
Preston, Cuba, see Antilla 214
Prince Rupert 161
Priolo, see Augusta 475
Progreso 656
Proper Bay, see Port Lincoln 62
Propriano 314
Provesten, see Copenhagen 236
Puerto Acevedo, see Villa Constitution 25
Puerto Armuelles, 750
also see Late Reports
Puerto Barrios 363
Puerto Belgrano, see Bahia Blanca 25
Puerto Bolivar 256
Puerto Borghi, see San Lorenzo 23
Puerto Buitagro, see San Nicolas 23
Puerto Cabello 1170
Puerto Cabezas 706
Puerto Chicama 761
Puerto Cortes 372
Puerto Deseado 29
Puerto de Hierro 1171
Puerto de la Luz, see Las Palmas, 175
also see Late Reports
Puerto de Raos, see Santander 870
Puerto de Soller, see Soller 871

Puerto Galvan, see Bahia Blanca 25
Puerto Granaderos, see San Lorenzo 23
Puerto Honduras, see Santa Cruz de Teneriffe 176
Puerto La Cruz 1171
Puerto Las Minas, see Bahia Las Minas 742
Puerto Limon 209
Puerto Local, see Gijon 863
Puerto Macias 273
Puerto Madero, see Buenos Aires 16
Puerto Madero, Mexico 656
Puerto Madryn 29
Puerto Maritime, see Guayaquil 254
Puerto Miranda 1157
Puerto Montt 186
Puerto Nuevo, see San Nicolas 23
Puerto Ordaz 1168
Puerto Ordaz Terminal, see Punta Cuchillo 1169
Puerto Padre 227
Puerto Palenque, see Palenque 250
Puerto Percy, see Punta Arenas 186
Puerto Plata 250
Puerto Princesa 778
Puerto Rico 789
Puerto Rosales, see Bahia Blanca 25
Puerto San Martin, see San Lorenzo 23
Puerto Somoza 706
Puerto Tarafa, see Nuevitas 227
Puerto Viejo, see Azua 248
Pulau Ayer Chawan, see Singapore 834
Pulau Bukom, see Singapore 834
Pulau Sambu 423
Pulau Sebarok, see Singapore 834
Punta Ancla, see Bahia Blanca 25
Punta Arenas, Chile 186
Punta Bustamente, see Rio Gallegos 31
Punta Cardon 1173
Punta Chavez, see Puerto Cabello 1170
Punta Ciguena, see Bahia Blanca 25
Punta Colorada 30
Punta Cuchillo 1169
Punta de Palmas 1159
Punta el Gancho, see Rio Gallegos 31
Punta Gorda, see Caripito 1136
Punta Gorda, Cuba, see Baracoa 216
Punta Grossa, see Koper 1190
Punta Marieta, see Caripito 1136
Punta Medanos 30
Punta Molino, see Gaeta 480
Puntarenas, Costa Rica 210
Punta Salinas, see Antilla 214
Punta Tablones, see Ilo 759
Punto Fijo, see Amuay Bay 1134
Purfleet, see London 1012
Pusan 585
Pyarnu 959
Pylos 355
Pyrmont, see Sydney 66

Q

Qasr Ahmed 617
Qatar 795
Quebec 162
Queenborough 1021
Que Iboe 715
Quequen 30
Quiliano Terminal 492
Quimper 314
Quincy, see Boston 1047
Quintero 187

R

Raahe 290
Rabaul 755
Rainham Creek 1020
Rairi, see Port Redi 397
Ramsburg, see Georgetown 368
Ramallo 22
Ramshall, see Norrkoping 892
Randers 244
Rangoon 132
Rapasaari, see Saimaa Canal 290
Rapid Bay 65
Raratonga, see Avarua 208
Ras al Khafji 815
Ras al-Khaima 982
Ras al Mishab 818
Ras Bahregan 453
Ras Es Sider, see Es Sider 611
Ras Gharib 261
Ras Lanuf 618
Ras Selaata 602
Ras Shukheir 261
Ras Tanura 819
Rasta, see Stockholm 898
Rathmullen 466
Rauma 290
Rautaruukki, see Raahe 290
Ravenna 494
Ravensbourne, see Otago 698
Recalada, see River Plate 13
Recife 107
Redi, see Port Redi 397
Redwood City 1102
Refineria Gibraltar, see Algeciras 854
Rejang River, see Tanjong Mani 643
Reni 960
Reposaari, see Mantyluoto 285
Reunion Island 800
Revere, see Boston 1047
Reykjavik 379
Rey Malabo 273
Rhodes 356
Riachuelo, see Buenos Aires 16
Ribadeo 869
Richards Bay see Late Reports 847
Richmond, Cal. 1102
Richmond, Va. 1103
Ridham 1021
Riga 960
Rijeka 1191
Rijnpoort, see Rotterdam 674
Rio, see Patras 354
Rio de Janeiro 108
Rio Gallegos 31
Rio Grande, Brazil 111
Rio Haina 251
Rio Nunez, see Port Kamsar 365
Rio Santiago, see La Plata 21
Risdon, see Hobart 50
Risor 730
Ristiina, see Saimaa Canal 290
Riverhead 1104
River Plate 13
Road Harbour 1181
Rochefort 314
Rochester, New York 1104
Rochester, U.K. 1019
Rockhampton 65
Rockport, see Tampa 1113
Rodby 244
Romania 801
Rome, see Georgetown 368
Rompin 639
Ronne 245
Ronneby 896
Ronnskarsverken, see Skelleftehamn 896
Rosario, Argentina 22
Rosario, Philippines, see Manila 775
Rosarito 657
Rosas 869
Roseau, see Dominica, Windward Islands 1185
Rosslare 466
Rostock 327
Rotterdam 674
Rouen 314
Roytta, see Tornio 292
Rozelle Bay, see Sydney 66
Rozi, see Bedi Bunder 382
Runcorn, see Manchester 1017
Ruwais 982
Rya Harbour, see Gothenburg 884

S

Sabah 639
Sabang 423
Sacavem, see Lisbon 786
Sacramento 1105
Saetia, see Antilla 214
Safaga 262
Safi 664
Sagunto 870
Saida, see Sidon 602
Saimaa Canal and ports in Lake Area of Saimaa 290
St. Catharines 163
St. Croix, see Virgin Is. 1179
St. George's, Bermuda 97
St. Georges, Grenada, Windward Is. 1186
St. Helena 852
Saint John, N.B. 164
St. James, see Burnside, also see late Reports 1053
St. John's, Antigua 607
St. John's, Newf. 165
St. Kitts, see Basseterre, Leeward Is. 607
St. Lawrence Seaway 803
St. Louis du Rhone 316
St. Lucia, see Castries, Windward Is. 1184
St. Maarten, see Philipsburg 687
St. Malo 316
St. Michael's Bay, see Sint Michiels Bay 688
St. Nazaire 317
St. Nicholas, see Aghios Nikolaos 347
St. Nikolo, see Aghios Nikolaos 347
St. Pierre 804
St. Pierre & Miquelon 804
St. Rose, see New Orleans 1087
St. Thomas, V.I. 1181
St. Vincent, Cape Verde Is. 178
St. Vincent, Windward Is., see Kingstown 1184
Sakai 553

Sakaide 553
Sakata 554
Salalah, see Port Raysut 738
Salaverry 761
Salawati 423
Saldanha Bay 848
Salerno 494
Salina, Bonaire, see Kralendijk 685
Salinas, see La Libertad 254
Salipazari, see Istanbul 938
Salonika, see Thessaloniki 357
Saltacaballo, see Castro Urdiales 861
Salt End, see Hull 1003
Salt River 504
Salvador 112
Samarai 756
Samoa, see Western Samoa 1183
Samson Point, see Port Walcott 64
Samsun 941
San Antonio 188
San Antonio Oeste 31
San Carlos 658
San Diego 1105
San Feliu de Guixols 870
San Fernando 779
San Francisco 1106
San Jose, Guatemala 363
San Juan, Puerto Rico 792
San Julian, Argentina 31
San Lorenzo, Argentina 23
San Lorenzo, Venezuela 1161
San Luis, Cal., see Port San Luis 1101
San Martin, see San Lorenzo 23
San Nicolas, Argentina 23
San Nicolas, Aruba 687
San Nicolas, Peru 762
San Pedro, Argentina 24
San Pedro, Cal., see Los Angeles 1080
San Pedro de Macoris 251
San Vicente, Chile 189
San Vincente, Philippines, see Aparri 764
San Vitale, see Ravenna 494
Sandakan 640
Sandarne, see Soderhamn 897
Sandaunhafen, see Hamburg 336
Sans Souci, see Santo Domingo 251
Santa Barbara, see Huasco 184
Santa Cruz, Argentina 31
Santa Cruz del Sur 228
Santa Cruz de Teneriffe 176
Santa Eleana Bay, see La Libertad 254
Santa Fe 24
Santa Iria, see Lisbon 786
Santa Isabel, see Rey Malabo 273
Santa Lucia, see Mariel 225
Santa Maria, see Jucaro 223
Santa Marta 203
Santan Terminal 426
Santana 114
Santander 870
Santerem 116
Santiago de Cuba 229
Santo Domingo 251
Santos 116
Santo Tomas de Castilla 364
Santurce, see Bilbao 857
Sao Francisco do Sul 118
Sao Luiz 119
Sao Sebastiao 120
Sapele 717
Sarande 1
Sarawak Coastal Ports 641
Sarikei, see Sibu 642
Sarnia 166
Sarpsborg 730
Sarroch, see Cagliari 478
Sasebo 555
Sassari, see Porto Torres 491
Sattahip 920
Sauda 731
Saudi Arabia 805
Sault Ste Marie 166
Saunsilta, see Uusikaupunki 293
Savannah 1108
Savannah-la-Mar 504
Savona 495
Savonlinna, see Saimaa Canal 290
Savu Savu, see Suva Outports 278
Scalloway 1026
Scapa Flow 1026
Scheerhafen, see Kiel 337
Schiedam, see Rotterdam 674
Schillig Roads, see Wilhelmshaven 339
Scotland, see United Kingdom 984
Seaforth, see Liverpool 1010
Searsport 1109
Seattle 1110
Seddon Island, see Tampa 1113
Sejingkat 641
Selfs Point, see Hobart 50
Semarang 429
Sembawang, see Singapore 834
Semporna, see Sabah 639
Senboku, see Sakai 553
Sendai, see Shiogama 559
Senegal 829
Senipah Terminal 429
Sepetiba Terminal 123
Sept Iles 166
Seria 128
Sete 317
Setubal 787
Seven Islands, see Sept Iles 166
Seville 871
Seward 1111
Sewaren, see New York 1089
Sewell's Point, see Hampton Roads 1067
Seychelles 830
Sfaktiria, see Pylos 355
Sfax 932
Shanghai, also see Late Reports 194
Shannon Estuary 466
Sharjah 982
Shark Bay, see Carnarvon 39
Sharpness 1028
Sheerness 1018
Sheet Harbour 168
Shellhaven, see London 1012
Shengjin 1
Sherbro River, see Freetown 831
Sheskharis, see Novorossiysk 956
Shikama, see Himeji 513
Shimanzi, see Mombasa 577
Shimizu 556
Shimonoseki 557
Shimotsu 558
Shinminato, see Toyama Shinko 565
Shiogama 559
Shippegan 168
Shoreham 1028
Shuaiba 596
Shuwaikh 597
Sibenik 1192
Sibu 642
Sibuti, see Sarawak Coastal Ports 641
Sidi Kerir 262
Sidon 602
Sierra Leone 831
Siglufjord 380
Sikea 896
Sines, see Late Reports
Singapore 834
Sinoe 609
Sint Michiels Bay 688
Sinucane Is., see Port Hedland 58
Siporex, see Skelleftehamn 896
Sirri Island, also see Late Reports 455
Sirtica, see Ras Lanuf 618
Sitka 1111
Sitra 82
Skaerbaek 245
Skagastrond 380
Skagway 1111
Skandia Harbour, see Gothenburg 884
Skaramanga, see Eleusis 349
Skarvik Harbour, see Gothenburg 884
Skelleftehamn 896
Skeppsviken, see Uddevalla 902
Skien 731
Skikda, also see Late Reports 3
Skoldvik, see Porvoo 288
Skredsvik 897
Skuthhamn, see Pitea 896
Slagen (Slagenstangen) 731
Sligo 467
Slite 897
Smalkalden 880
Smiths Bluff 1111
Snails Bay, see Sydney 66
Snodland, see Rochester 1019
Soares Dutra Terminal, see Tramandai 123
Sobo 930
Sochi 961
Society Islands 838
Soderhamn 897
Soervaag 276
Sola, see Stavanger 732
Soller 871
Solomon Islands 839
Solvesborg 898
Somali Republic 840
Sonderborg 245
Sondre Stromfjord 362
Soraker, see Sundsvall 901
Sorel 168
Sornainen Harbour, see Helsinki 281
Sorong 431
Sourabaja 432
Sousakion, see Isthmia 350
Sousse 932
South Africa 842
Southampton 1028
South Atlantic Islands 852
South Boston, see Boston 1047
South Brewer, see Bangor 1044
South Riding Point, also see Late Reports 79
South Shields, see Tyne District 1037

Spain 854
Spanish Guinea, see **Equatorial Guinea** 273
Spanish Sahara 875
Sparrows Point, see Baltimore 1043
Spezia, see La Spezia 485
Split 1192
Spring Bay 66
Sri Lanka 876
Sriracha 920
Stadersand 339
Stadthafen, see Lubeck 338
Stanlow, see Manchester 1017
Staten Is., see New York 1089
Stavanger 732
Steno Straits, see Chalkis 348
Stenungsund 898
Stephenville 169
Sterno, see Karlshamn 888
Stettin, see Szczecin 783
Stilleryd, see Karlshamn 888
Stocka, see Hudiksvall 887
Stockholm 898
Stockton 1111
Stockvik, see Sundsvall 901
Stora Hoggarn, see Stockholm 898
Stormsker, see Umea 903
Stornoway 1030
Storugns 901
Stralsund 327
Stranraer 1030
Strasbourg 319
Stromstad 901
Strood, see Rochester 1019
Stugsund, see Soderhamn 897
Suai, see Sarawak Coastal Ports 641
Suao 912
Suda Bay 356
Sudan 878
Suez, see Suez Canal 263
Suez Canal 263
Sukhumi 961
Sukkertoppen 362
Sulina 801
Sullom Voe 1031
Sultanate of Oman 736
Summerside 169
Sundahofn, see Reykjavik 379
Sunderland 1034
Sundsvall 901
Sungei Gerong, see Palembang 417
Sungei Merah, see Sibu 642
Sungei Pakning, see Dumai 410
Sungei Sarawak, see Sejingkat 641
Sunndalsora 732
Supe 763
Superior, see Duluth 1061
Suriname 879
Suva 278
Suza, see Sousse 932
Svartvik, see Sundsvall 901
Svendborg 246
Svolvaer 733
Swansea 1035
Sweden 882
Swinoujscie, see Szczecin 783
Sydney, N.S.W. 66
Sydney, N.S. 170
Syria 906
Syros 356
Szczecin 783

T

Tabaco 780
Tabangao, see Batangas 765
Table Bay, see Capetown 842
Tachibana, see Anan 507
Tacloban 780
Tacoma 1113
Tagonoura-Ko 559
Tahiti Island, see Papeete 838
Tahkoluoto, see Mantyluoto 285
Taichung 913
Taiwan 910
Takoradi 342
Taku Bar 196
Talara 763
Talcahuano 189
Tallbacken, see Norrkoping 892
Tallinn 962
Taltal 190
Tamano, see Uno 567
Tamatave 627
Tammisaari 280
Tampa 1113
Tampico 659
Tanabe 560
Tanah Puteh, see Kuching 630
Tanamo 229
Tanauan 780
Tandjong Lepee, see Pomalaa 420
Tandjong Perak, see Sourabaja 432
Tandjung Priok, see Jakarta 412
Tandjung Uban 433
Tanga 916
Tangier 664
Tangku, see Taku Bar 196
Tanjong Mani 643
Tanjong Pagar, see Singapore 834
Tanjong Pendam, see Sibu 642
Tanjong Penjuru, see Singapore 834
Tanjong Salirong 129
Tanoura, see Moji 538
Tanzania 914
Tarakan 433
Taranaki, see New Plymouth 696
Taranto 495
Tarawa 346
Tarbert Is. Oil Terminal, see Shannon Estuary 466
Tarragona 872
Tartous 908
Tauranga 699
Tawau 643
Tebar Terminal, see Sao Sebastiao 120
Tecarmo, see Carmopolis 102
Tedut Terminal, see Tramandai 123
Tees 1036
Teesport 1036
Tegal 433
Tela 373
Telegrafberget, see Stockholm 898
Teluk Bayur 434
Teluk Betung, see Panjang 418
Tema 343
Tembladora 930
Temse, see Brussels 92
Teneriffe, see Santa Cruz de Teneriffe 176
Terneuzen 680
Tetney Terminal 1037
Texas City 1117
Thailand 918
Thames District, see London 1012
Thamshamn 733
Thamshavn 733
Thessaloniki 357
Thevenard 67
Thorold 170
Three Rivers, see Trois Rivieres 171
Thule, see North Star Bugt. 362
Thunder Bay, see Lakehead Harbour 147
Thursday Island 68
Tientsin, see Taku Bar 196
Tiko 136
Tilbury, see London 1012
Timaru 700
Tin Can Island, see Lagos 712
Tioga Terminal, see Philadelphia 1094
Tjilitjap 434
Tjirebon 436
Tobata 560
Tobruk 619
Tocopilla 190
Togo 922
Tokuyama 561
Tokyo 562
Toledo 1117
Tolkis, see Tolkkinen 292
Tolkkinen 292
Tomakomai 564
Tonda, see Tokuyama 561
Tonga 924
Tonnay-Charente 319
Tonsberg 733
Toppila, see Oulu 286
Tore, see Karlsborgsverken 888
Tornio 292
Toronto 170
Torre Annunziata 496
Torres Strait 68
Torrevieja 872
Tors Harbour, see Gothenburg 884
Torshavn 276
Tortola, B.V.I. 1181
Toulon 320
Tourane, see Danang 1177
Townsville 68
Toyama 564
Toyama Shinko 565
Trabzon 941
Tramandai 123
Trangisvaag 276
Tranmere, see Liverpool 1010
Travemunde, see Lubeck 338
Trelleborg 902
Trieste 496
Trincomalee 877
Trinidad 925
Tripoli, Lebanon 604
Tripoli, Libya 619
Triso, see Sejingkat 641
Trois Rivieres 171
Tromso 734
Trondheim 734
Troon, see Ayr 985
Trouville 320
Tsingtao 197
Tsukumi 566
Tsuruga 566
Tsurumi, see Kawasaki and Yokohama 521 572
Tsurusaki, see Oita 547

INDEX

Tuapse 962
Tubarao 124
Tumaco 204
Tunadalshamnen, see Sundsvall 901
Tunas de Zaza, see Cienfuegos 218
Tungprong Port, see Sattahip 920
Tunis, see La Goulette 931
Tunisia 931
Turbo, also see Late Reports 204
Turkey 934
Turku 292
Tuticorin 398
Tvoroyri, see Trangisvaag 276
Tyne District 1037
Tynemouth, see Tyne District 1037

U

Ube 567
Ubu 125
Uddevalla 902
Uleaborg, see Oulu 286
Ulsan 586
Umaiso, see Matsuyama 535
Umea 903
Umm al Qaiwain 983
Umm Qasr, see Basrah 457
Umm Said 796
Union of Soviet Socialist Republics 942
United Arab Emirates 967
United Kingdom 984
United States of America 1040
Uno 567
Upnor, see Rochester 1019
Urangan, see Maryborough 53
Urangel, see Nakhodka 954
Urdiales, see Castro Urdiales 861
Urinj, see Rijeka 1191
Uruguay 1126
Useless Loop, see Carnarvon 39
Usunkum, see Eregli 935
Uusikaupunki 293

V

Vaasa 293
Vacamonte 750
Vado Ligure, see Savona 495
Vadso 734
Vaitape, see Bora Bora 838
Val de Caes, see Belem 101
Valdez 1117
Valdez Marine Terminal 1118
Valencia 872
Valko 294
Valletta 645
Vallvik 903
Valparaiso 191
Vancouver, B.C. 172
Vancouver, Wash. 1123
Vanimo 756
Varberg 904
Varkaus, see Saimaa Canal 290
Varna 130
Varton, see Stockholm 898
Vasklot, see Vaasa 293
Vassiliko Bay 233
Vasteras 904
Vastervik 905
Vatia Point, see Suva Outports 278
Veitsiluoto 294
Vejle 246
Venezuela 1134
Venice 497
Ventspils 963
Vera Cruz 659
Veraval 398
Verdon, see Bordeaux 296
Vestmannaeyjar 380
Viana do Castelo 787
Victoria, B.C. 173
Victoria, Cameroons 136
Vietnam 1177
Vigo 873
Vihreasaari, see Oulu 286
Vila Real de Santo Antonio 788
Villa Cisneros 875
Villa Constitucion 25
Virgin Islands 1179
Visakhapatnam 399
Visby 905
Vita 230
Vitoria 127
Vivstavarv, see Sundsvall 901
Vlaardingen 681
Volos 357
Voltri, see Genoa 481
Voorbaai, see Mossel Bay 846
Vordingborg 246
Vostochny 964
Voudia Bay, see Milos 353
Vuda Point, see Lautoka 278
Vouksi, see Saimaa Canal 290
Vyborg 964

W

Wadi Firan 270
Waipipi, see Waverley Harbour 700
Wakamatsu 568
Wakayama 569
Wales, see United Kingdom 984
Walkom, see Valko 294
Wallaroo 70
Wallhamn 905
Wallsend, see Tyne District 1037
Walsh Bay, see Sydney 66
Walvis Bay 850
Wanganui 700
Warnemunde, see Rostock 327
Warrenpoint 1038
Warri, see Burutu 709
Watchet 1039
Waterford 468
Waverley Harbour 700
Weehawken, see New York 1089
Weipa 70
Welland 173
Welland Canal, see St. Lawrence Seaway 803
Wellington 702
Westernport 71
Western Samoa 1183
West Hartlepool, see Tees 1036
Westview, see Powell River 160
Westville, see Philadelphia 1094
Westwego, see New Orleans 1087
Wete 916
Wewak 756
Weymouth, Mass., see Boston 1047
Weymouth, N.S. 173
Whangarei 703
Whiddy Island, see Bantry 461
White Bay, see Sydney 66
Whitegate, see Cork 461
Whitehaven 1039
Whyalla 72
Wilhelmsburg, see Hamburg 336
Wilhelmshaven 339
Willemstad 688
Williamstown, see Melbourne 54
Wilmington, Del. 1124
Wilmington, N.C. 1124
Windsor 173
Windward Islands 1184
Wintam, see Brussels 92
Wismar 327
Wolloomooloo, see Sydney 66
Wrangell 1125
Wright Point, see Port Hawkesbury 158
Wulsan, see Ulsan 586
Wyndham 73

Y

Yabucoa 794
Yahata, see Chiba 507
Yali Island 358
Yalta 965
Yampi Sound 73
Yandina 839
Yarraville, see Melbourne 54
Yawata 569
Yembo, see Yenbo 827
Yemen, Arab Republic 1187
Yemen, People's Democratic Republic of 1188
Yenbo 827
Ymuiden, see Ijmuiden 674
Yokkaichi 571
Yokohama 572
Yokosuka 575
Yosu 587
Ystad 905
Yugoslavia 1190
Yura, see Shimotsu 558

Z

Zadar 1192
Zaire Republic 1194
Zamboanga 780
Zanzibar 916
Zarate 25
Zeebrugge 94
Zelenika 1192
Zhdanov 965
Zirkhu Island 983
Zonguldak 941
Zorrosa, see Bilbao 857
Zuara 619
Zueitina 619
Zuluf 828

LATE REPORTS

Albania

DURRES

SHIPMASTER'S REPORT: January 1979

NAVIGATION: Incoming vessels are to anchor in position 41° 15' N., 19° 27' E. (2.5 miles from breakwater) and await orders. The danger area shown on BA. chart No. 2701 is reportedly non-existent.

COMMUNICATIONS: The local radio station Call sign ZAD is to be contacted on anchoring. The radio transmitter is sealed on berthing. The Agents have a telex machine which works intermittently. Telephone calls to Northern Europe possible but subject to delay.

PILOT: Equipped with VHF Channel 16, boards at anchorage.

TUGS: Two medium size tugs available for docking. One salvage tug stationed in port.

DRAFT: Pilots advised 27 ft. 06 in. max draft alongside and in approaches.

CARGO FACILITIES: Loaded 14,000 tonnes of cement in 50 kg. bags from rail and road trucks. 3 shift system. Used both shore cranes and ships derricks. As cargo comes from cement factory in interior by rail, presentation is very intermittent, and vessel rarely informed of working prospects more than a few hours in advance. Sundays are normally holidays. Loading rate averaged 1,000 tons approx. per working day but ranged from 200 to 1,700 depending on labour and cargo availability.

FORMALITIES: ETA's required 5 and 2 days in advance, also include length, tonnage, flag, state of health, etc.

Documents required: 6 crew lists, 2 lists of foreign currency, 2 personal effects lists, 1 health declaration, 3 stores lists. Bond is sealed but Customs will open on request.

REPAIR FACILITIES: Small shipyard for minor repairs available.

SURVEYS: Agents advise that government surveyor available for radio surveys, etc. No classification Society Surveyor available.

CASH: Lek is currency – 1 Lek = approx. 14 US cents (7 Leks = $1). Foreign currency may be exchanged (approx. 5 days notice).

PROVISIONS: Government ship chandler. Fresh vegetables good, fish available at moderate prices, meat not recommended.

LAUNDRY: Available. Reasonable price, average standard.

CREW: Repatriation is reportedly possible, however it takes 3 days to get an exit visa.

Shore leave is permitted to seaman's club only until 2300 hrs. A special pass has to be obtained to visit the town (1500 to 1900 hrs. only). Tours to Tirana can be arranged by car, if one day's notice is given. Casual dress (jeans) also long hair prohibited outside dock gates.

Gangway guards in attendance throughout stay.

Considerable difficulty experienced in arranging tour for Chinese ratings.

PORT FACILITIES: Berthing facilities for 10 ocean-going vessels. Sufficient 5-ton shore cranes available. Railway tracks to most quays. Main imports coal/coke. Exports, low grade chrome ore. Priority for Albanian vessels. One floating crane. Lack of mechanisation reduces work rate. No fork lifts or proper palletisation observed.

AGENCY: Adtare (government agency) in port area. The Agents visit vessel twice daily and speak adequate English and are reasonably helpful.

FRESH WATER: Available from barge at $1.50 per ton approx.

FUEL OIL: Prices January 1st, 1979: Heavy Oil $98 per ton and Diesel $141 per ton delivered by road tankers (limited amounts).

LOCAL REGULATIONS: Permission to immobilise engines must be obtained. Garbage is collected (compulsorily) daily in plastic sacks. Permission required prior to de-ballasting.

Watchmen: Not required as gangway guards provided.

Algeria

GENERAL:

SHIPS OFFICERS REPORT: January 1979.

TIME: GMT plus 1 hour in Winter. GMT plus 2 hours in Summer.

SKIDKA (Formerly Philippeville): 36.54 N. 06.54 E.

SHIPMASTER'S REPORT: March 1979.

PILOTAGE: Pilotage is compulsory. When entering the port Pilot is arranged with the Harbour Control. When leaving, the ship contacts Harbour Control on VHF radio once all documentation has been completed and the vessel is ready to leave. There are 6 Pilots attached to the port, 3 Egyptians, 2 Bulgarians and 1 Algerian.

ANCHORAGE: The anchorage is sheltered from the South through West to N.N.W. by hills, but is open from the North through to the East.

During our stay at the anchorage the wind varied from S.W. to North, and at times a large swell built up, obviously from a disturbance away from the coast. I found secure holding ground in 30 to 40 m. of water 1 mile North of the main breakwater of Skikda harbour for the 3 times we had to anchor, with 4.5 shackles of cable out on the starboard anchor. Our vessel rode out several severe squalls when other ships in the vicinity were dragging their anchors.

RADIO: There is a local radio station working VHF only, call sign "Skikda Radio", calling frequency Channel 16 and working frequency Channel 26. Local telephone calls to Skikda are handled very quickly, but overseas telephone calls can be subject to long delays, this is because they first have to go on the land line to Alger (Algiers) and this line can be congested, the same delay is also experienced when telephoning overseas from ashore.

There is a local Port Control radio, Call sign "Skikda Port Control", calling frequency Channel 16 VHF, and working frequencies Channels 12 or 14 VHF. When approaching the port ships should call the "Port Control" and give the following:

(a) Ships Name.
(b) Nationality.
(c) Gross tonnage.
(d) Draft.
(e) Length overall.
(f) Tonnage and type of cargo for discharge at Skikda.
(g) Last port.

After which stand-by on Channel 16 for instructions. When at the anchorage it is a good idea to contact the Port Control each day to see if they have any instructions. Control seem to give the ships as much prior notice of movement as they can, and the Pilot will call on Channel 16 when he is on his way to the vessel.

TUGS: Tugs are compulsory for vessels over 1,500 g.r.t., the number used depending on the size of the vessel. There are 4 tugs attached to the port, all of at least 2,500 h.p. in order to handle the large tankers and gas tankers that use the port in what is called the "New Port", which is a new port complex built 1 mile to the East of Skikda to handle the export of natural gas. The tugs are really too big for use with vessels of the size of our vessel (3,200 d.w.t., 1,597 g.r.t.).

STEVEDORING/PORT FACILITIES: The stevedores are part of a nationalised concern. General cargo discharge or loading is carried out by a combination of shore cranes and ships gear. The main grain discharge berth is by the silo, this berth is out of action for grain at present as the machinery is under repair, the latest estimate for recommencing discharge there is July. Once the machinery is in full working order they expect to be able to produce figures of up to 3,000 tonnes per day.

We lay at the other grain berth on the outer harbour wall where discharge was commenced with a mobile sucker into a hopper, however, on the second day of work the machine became inoperative. They did try to work with a mobile crane, but the condition of the quay was such that the crane was unable to find a secure platform for work so we had to wait for another berth to become vacant and discharge by shore crane with a grab into hopper then into lorries. Once on the final berth the discharge progressed quickly taking 3 working days, that is from 0630 hrs. through to 0230 hrs. with 1 hour break for lunch, and 1 hour break at the change of shift at 1930 hrs.

The port is well equipped with mobile machinery, i.e., forklifts large and small, mobile cranes of different types, however, maintainence appears to be a problem. There is a floating crane of unknown lifting capacity, there was no safe working load marked on any of the cranes. There is a firefighting launch in the harbour equipped with several knozzles, the tugs are also fitted for firefighting.

STORES: A limited amount of fresh provisions can be obtained, including fresh meat, however, it is expensive. We found that items such as cooking oil, butter and flour simply could not be obtained. The ship chandler is part of the Agency so once again is part of a nationalised concern. Fresh water is laid on to most quays, but whilst we were at Skikda it was only available for 3 hours each morning each day, and at one stage the water supply system stopped functioning for 4 days. The Harbour Master seems to do his best to find ships a berth inside when they reach the desperate stage for fresh water and stores.

AUTHORITIES: Skikda is unique in the ports of Algeria in the fact that when at anchor ships come under the jurisdiction of the local Algerian Coastguard. This means that Coastguard officers board when the ships have anchored, examine the crew declaration, stores list, bonded stores list, currency declaration, crew cabins, and then seal the Bond. If laying at anchor for a long time they will come out and give an issue from the Bond if the Agents contact them.

Once inside the port the local Customs Authorities take over. They visit on arrival alongside and also require, crew declaration, stores list, bonded stores list, currency declaration; dangerous drugs list and crew lists. They will give an issue from the bond, but only sufficient for use whilst the ship is in port.

The Port Health and Immigration Officers also board on arrival alongside. Port Health requires the usual Maritime Declaration of Health and a list of vaccination (smallpox) dates, and Immigration require a crew list. If going out of the dock gate crew need passport, Seamens I.D. card or discharge book for presentation at the gate where they are issued with a shore pass and book is left in Police care until crew member returns to the dock area.

It is a Police regulation that a shore watchman is employed day and night. The Agency arrange this, deal with the paperwork and present the bill for signature.

AGENCY: There is only one agency in the port. The agency is Compagnie Nationale Algerienne de Navigation (CNAN), a copy of their instructions to Masters is presented below. One man being appointed to look after each vessel.

NOTICE:

Compagnie Nationale Algerienne de Navigation: Agency of Skikda.

Notice:

Dear Captain,

In order to fix all necessary arrangements for your call and give the best possible turn-around, you are kindly requested to follow the instructions hereunder stated:

1. ETA to be addressed to: Traffic Department. Cable: CNALNAV SKIKDA. Telex: 92.815. Telephone: 95-57-51; 95-57-52; 95-50-29.

1st ETA: 72 hrs., 2nd ETA: 48 hrs. and confirm via Skikda Radio definite ETA 24 hrs. before arrival.

2. Specify nature and quantity of cargo on board for Skikda together with dangerous goods if any.

3. State details of heavy cargo and clarify whether to be unloaded with ship's gear or shore cranes.

4. Bunkers: Should be ordered from the Agent 24 hrs. before arrival and must be received from suppliers at latest 24 hrs. before sailing. This is very important in order to avoid delay.

5. Shipchandler: Requirements should be ordered from the Agent or direct from the suppliers immediately on arrival and delivered latest 12 hrs. before sailing. The bills should be signed by Master before ship's departure.

6. Medical Assistance: Medical visits are fixed twice a day: 0900 hrs. and 1500 hrs. Emergencies excepted.

Master should declare Crew members for doctor, morning for afternoon visit. Afternoon for next morning.

All medicine should be ordered only by Master by letter addressed to the Agent.

7. Disembarking/Embarking: All Customs and Immigration formalities should be arranged 24 hrs. before sailing.

Master should declare Crew members for repatriation latest 24 hrs. before sailing, otherwise no disembarking will be arranged.

8. Custom's Fine: All penalties for whatever should be the reason must be paid by Master to Customs 24 hrs. before ship's departure.

Working hours of Customs office as follows:

Morning	0800 – 1100 hrs.
Afternoon	1430 – 1700 hrs.
Thursday	0800 – 1100 hrs.

on Friday and holidays office is closed.

9. (a) Discharging and/or loading operations must be carefully checked by Master and all remarks should be mentioned on stevedoring time sheets out-turn reports.

(b) Watchmen in holds are recommended in order to avoid pilferage.

Expenses involved for watching will be Owners or Charterers account.

10. The Agent will deliver to Master on arrival, "forms of call's report". These documents should be carefully filled in and returned before sailing.

Angola

THIS ENTRY SUPERSEDES ENTRY ON PAGE 4-5 OF THE MAIN TEXT.

CABINDA: 05.22 S. 12.11 E.

DOCUMENTS:

7 Manifests for each port of origin of cargo for Cabinda, plus 1 copy of each Bill of Lading.

8 Passengers Lists (Disembarking/in transit) even if nil.

7 Crew Lists.

8 Lists of ports previously visited.

2 Lists of Crew vaccinations.

3 Lists of Ships Stores.

3 Personal Effects Lists.

Other forms intended for Customs, Health, etc., can be filled in on arrival.

PILOTAGE: Government Pilots' service is obligatory. Radiograms giving ETA to be sent to Agents via Luanda Radio (or by telegram from previous port), and anchorage to be used which is the closest to Cabinda, provided locations permit. The vessel is visited by port authorities, and, if necessary, the vessel may shift to another anchorage.

When the cargo is for the account of Cabinda Gulf Oil, the vessel must be moved closer to Malongo where the oil companies have their own berth for discharge of various cargo into barges.

Tankers: The Mooring Master, from Cabgoc, moves arriving tankers 1 to 2 miles to the West, and assists in mooring to buoys. Assistance from a tug is unnecessary. Vessels only moor in daylight hours. Unmooring can be carried out at any time. Attention must be paid to oil wells and pipe-lines in that area. All platforms have lights which emit the letter "U" in Morse Code. Approach must be made from the West.

It is requested that vessels have on their port side and at the stern a gangway properly equipped and illuminated.

On the forecastle there must be 3 mooring cables. 1 steel cable of 0.75 in. diameter with an eye and an appropriate shackle must be rigged on the derrick.

ANCHORAGE: For vessels bound for Malongo, the anchorage is restricted where Cabinda Gulf Oil is operating, approximately between 5° 15′ S. and 5° 30′ S. being extended outwards to 12° 00′ E. Tankers must not anchor less than 2 miles to the West of the single mooring buoy.

MAX. SIZE: Cargo vessels, in the anchorage, with 32 ft. depth, may work at will. Vessels with greater draft can be accommodated further seaward but there is always the risk of swell hampering operations.

CLEARANCE: After arrival, official authorities will board the vessel for rapid clearance so that preparations may be made to berth.

In the event of arrival during the night, clearance will not be made before 0800 hrs. In the meantime, an Agent of the Customs Police will be stationed on board, and will stay until berthing takes place in daylight.

RADIO: A HF radio telephone is installed in the Malongo terminal, call sign "Malongo", listening out throughout 24 hours, on the international frequency 2182 mHz.

For communications up to approximately 50 miles, a VHF system is installed at Malongo, which uses the same call sign (Malongo) and is also manned throughout 24 hours.

Initial contact on VHF, must be made on 156.8 mc/s (Channel 16) and then by mutual agreement traffic can be passed on one of the following frequencies: 156.6 mc/s (Channel 12); 165.45 mc/s (Channel 9); 156.7 mc/s (Channel 14).

Masters of vessels are requested to advise "Cabgoc Cabinda" 72 and 24 hours in advance of the ETA, giving the name of the vessel, date and time of expected arrival, name of Master, and any other special information.

TUGS: Normally not necessary. Cabinda Gulf Oil have a small tug which will give assistance if necessary.

SINGLE BUOY MOORING: A mooring buoy is located about 8 miles S.W. of the Cabinda Gulf Oil Co. Terminal at Malongo. The position of the buoy is approx. 05° 26′ S. and 12° 05′ E.

The buoy has a white light with range 5 miles, flashing for 2 secs. and eclipsed for 18 secs.

The depth of water is 75 ft.

BERTHING: The berthing equipment is passed on board the vessel at the terminal when the Berthing Master comes on board the tanker.

The first step for mooring is to lower one of the cables from the deck, and to hook on to the buoy quickly, which will be done by the terminal launch. The tanker must have 3 cables ready on deck.

Berthing is only done in daytime from 0600 to 1900 hrs., which is considered the maximum in conditions of favourable visibility.

Handling of hoses: 2×12 in. hoses are connected to the manifold of the vessel on the port side. The handling of hoses is effected by the ship's crew, under the direction of a deck officer, in accordance with instructions of the "Berthing Master".

The derrick on the port side must be prepared with a wire of 0.75 in. diameter (minimum).

The weight of each hose is about 3 tons.

Ballast: There are no facilities for receiving dirty ballast. Vessels must arrive with clean ballast sufficient for safe manoeuvring. Deballasting operations will be constantly checked by a representative of "Cabgoc", and the slightest evidence of pollution will cause permission for deballasting to be withdrawn.

Cargo: The crude oil at Cabinda has densities varying from 26.3 API. to 34.6 API. Some of this oil contains appreciable percentages of hydrogen sulphate which can cause a toxic atmosphere during loading.

Loading: This is done by gravity, at times assisted by pumps at a rate of 30,000 bbls.p.h. About 30 minutes prior to completion, the representative of Cabgoc must be advised so that the "Shutdown" between the vessel and the terminal may be co-ordinated.

When the vessel has completed loading, the valves on land and on the buoy must be closed. Only then may the vessel's manifold valves be closed.

In an emergency the vessel may suspend loading operations.

After completion of loading, the vessel will carry out a comparison between its own load measurements and those of the terminal. The verified quantity will be transmitted by radio and lists prepared and distributed.

Cargo documentation will be delivered to the Master of the vessel by the ship's Agents and as quickly as possible.

Tankers must be cleared very quickly so that there is no delay in departure. It is imperative that the Master declares prior to loading the tonnage required. Accurate meters ashore ensure that the ordered tonnage is supplied.

STEVEDORING: It is recommended that notice be given 48 hours in advance, as to distribution and nature of cargo.

MEDICAL: Arrangements can be made for a doctor to visit the vessel on arrival. There are hospital facilities. Serious cases are sent to Luanda. Crew must have certificates of innoculation against smallpox and yellow fever.

DENSITY: 1025. Influence of the current of the River Zaire varies according to the time of the year.

FRESH WATER: Supply cannot be guaranteed.

FUEL: None available.

WATCHMEN: Not necessary. The authorities place a port policeman on board.

OPENING/CLOSING HATCHES: By the Crew or stevedores.

CERTIFICATES: Ship's register, certificates of deratting (valid) and certificate of life saving equipment.

CUSTOMS ALLOWANCE: Customs normally place no restrictions on the consumption of alcoholic drinks on board, but under no circumstances may alcohol be taken ashore.

IDENTIFICATION CARDS: Supplied by the Agents and stamped by the Immigration police before any person comes ashore.

CONSULS: None.

REPAIRS: Very limited facilities.

REPATRIATION: This can be arranged only when absolutely necessary, but solely via Luanda.
AIRPORT: Small airport about 4 miles from the town served by the internal airline with only 1 flight per day to and from Luanda.
TIME: GMT plus 1 hour.
HOLIDAYS: 1st January, 4th February, 27th March, 1st May, 2nd November, 11th November, 10th December, 25th December.
No work is possible on any of these days.
POLICE/AMBULANCE/FIRE: Police Tel. 22456; Ambulance Tel. 22405; Fire Tel. Port Captain 22160/22159.
SERVICES: None available.
SHORE LEAVE: Shore leave for Crew members limited. Crew members who are not on board when the vessel leaves are detained and repatriated at the cost of the vessel. The vessel may also be fined.
DELAYS: Tankers are not normally delayed, but dry cargo vessels may be delayed if two or more vessels arrive simultaneously, due to a lack of sufficient barges. Also, delay in loading and unloading may be caused by rough seas.
AUTHORITY: Inspector of Operations for Northern Ports, Cabinda.

Bahamas

SOUTH RIDING POINT

The following notices were received from a ship's Master in February 1979

Burmah Oil Bahamas Ltd.
P.O. Box F-2530 Freeport, Grand, Bahama.
The Master, m.s./m.v. ....
Dear Sir,

South Riding Point Transshipment Terminal Safety Requirements

Responsibility for the safe conduct of operations on board your ship while alongside our terminal rest with you as Master. Nevertheless, since our personnel, property and other shipping may suffer serious damage in the event of accident aboard your ship, we wish, before operations start, to seek your full co-operation and understanding on the safety requirements set out in the Ship/Shore Safety Check List.

These safety requirements have been drawn up by a number of international terminal operators in conjunction with a respresentative section of the international tanker industry. They are based upon the provisions of the codes of safe practice currently accepted by the oil and tanker industries. We therefore expect you and all under your command to adhere strictly to them throughout your stay alongside this terminal. We, for our part, will ensure that our peronnel do likewise and co-operate fully with you in the mutual interest of safe and efficient operation.

In order to assure ourselves of your compliance with these safety requirements, we shall, from time to time, instruct a member of our staff to visit your ship and, after reporting to you or your deputy, join one of our officers in a routine inspection of cargo decks and accommodation spaces.

If we observe infringements on board your ship of any of these safety requirements we shall bring this immediately to the attention of yourself or your deputy for corrective action. If such action is not taken in a reasonable time we shall adopt such measures as appear to us most appropriate to deal with the situation and shall notify you accordingly.

If you observe any infringement of these requirements by terminal staff, whether on the jetty or on board your ship, please bring this immediately to the notice of our representative who is nominated as your contact during your stay in port. Should you consider any immediate threat to the safety of your ship arises from any action on our part, or equipment under our control, you are fully entitled to demand an immediate cessation of operations.

WE RESERVE THE RIGHT IN THE EVENT OF CONTINUED OR FLAGRANT DISREGARD OF THESE SAFETY REQUIREMENTS BY ANY SHIP, TO STOP ALL OPERATIONS AND ORDER THAT SHIP OFF THE BERTH FOR APPROPRIATE ACTION TO BE TAKEN BY THE CHARTERERS AND OWNERS CONCERNED.

Terminal Manager

Tug Requisition

I/we hereby request and authorise Burmah Oil Bahamas Ltd. on behalf of the s.s./m.v. .... to supply such tug or tugs as may be considered necessary by Burmah Oil Bahamas Ltd. for the moving or otherwise assisting of the vessel whilst entering, or within or leaving the Harbour Area at South Riding Point. Such hiring to be on the terms of your usual conditions as printed below.

Date:.............................
Time:.................. Signed...
Master

Conditions of Hire of Tugs

1. For the purpose of these conditions, the phrase "Whilst Towing" shall be deemed to cover the period commencing when the vessel is in a position to receive orders direct from the Hirer's vessel to pick up ropes or lines or when the towrope has been passed to or by the tug, whichever is the sooner, and ending when the final orders from the Hirer's vessel to cast off ropes or lines have been carried out, or the towrope has been finally slipped and the tug is safely clear of the vessel, whichever is the later. Towing is any operation in connection with holding, pushing, pulling or moving the ship.

2. On the employment of a tug the Master and crew thereof become the servants of and identified with the Hirer and are under the control of the Hirer or his servants or his Agents, and anyone on board the Hirer's vessel who may be employed and/or are paid by the Tug Owner shall be considered the servant of the Hirer.

3. The Tug Owner shall not, while towing, bear or be liable for damage of any description done by or to the tug, or done by or to the Hirer's vessel, or for loss of or damage to anything on board the Hirer's vessel, of or for loss of the tug or the Hirer's vessel, or for any personal injury or loss of life, arising from any cause, including negligence at any time of the Tug Owner's servants or Agent, unseaworthiness, unfitness or breakdown of tug, its machinery, boilers, towing gear, equipment or hawsers, lack of fuel, stores or speed, or otherwise, and the Hirer shall pay for all loss or damage and personal injury or loss of life and shall also indemnify the Tug Owner against all consequences thereof, and the Tug Owner shall not whilst at the request expressed or implied of the Hirer rendering any service other than towing be held responsible for any damage done to the Hirer's vessel and the Hirer shall indemnify the Tug Owner against any claim by a third party (other than a member of the crew of the tug) for personal injury or loss of life provided that any such liability for loss or damage as above set out is not caused by want of reasonable care on the part of the Tug Owner to make his tugs seaworthy for the navigation of the tugs during the towing or other services – the burden of proof of any failure to exercise such reasonable care being upon the Owner of the tug.

4. The Hirer shall not bear or be liable for any loss or damage of any description done by or to the tug otherwise than whilst towing, as herein defined or for loss of life or injury to the crew of the tug. Nevertheless nothing contained herein shall prejudice any claim the Tug Owner may have in Admiralty or at common law against the Hirer.

5. The Tug Owner may substitute one tug for another and may sub-let the work, wholly or in part, to other Tug Owners who shall also have the benefit of and be bound by these conditions.

6. The Tug Owners will not be responsible for the consequences of war, strikes, lock-outs, riots, civil commotions, disputes or labour disturbances (whether they be parties thereto or not) or anything done in contemplation of furtherance thereof, or delays of any description, however caused, including negligence of their servants or Agents.

7. These conditions shall be construed according to the law of the Commonwealth of the Bahamas and any dispute arising in any way whatsoever out of these conditions shall be determined by a single Arbitrator appointed by the parties.

Conditions of Use of Sea Berths and Inner Harbour at South Riding Point, Grand Bahama

All facilities and assistance of any sort whatsoever provided by the Company in or in connection with the Port at South Riding Point, whether or not any charge is made by the Company therefore, are provided subject to the following conditions:

1. Neither the Company nor its servants (in whatever capacity they may be acting) shall be responsible for any loss, damage, or delay from whatsoever cause arising in consequence of any assistance, advice or instructions whatsoever, given or tendered in respect of any vessel, whether by way of pilotage or berthing services, the provision of navigational facilities, including buoys or other channel markings or otherwise howsoever. In all circumstances the Master of any vessel shall remain solely responsible on behalf of his Owners or Operators for the safety and proper navigation of his vessel.

2. While the Company takes every care to ensure that all terminal facilities, which for the purposes hereof shall include berths, pipe-lines, gear, craft, premises, facilities, equipment and other property, provided by the Company are safe and suitable for vessels permitted to use them no guarantee of such safety or suitability is given and the company shall not be responsible for any loss damage or delay of any sort that may be sustained by or occur to any vessel or her Owners or Operators or her cargo or any part thereof (whether such cargo is on board or in the course of loading or discharging) by whomsoever or by whatsoever cause such loss damage or delay is occasioned and whether or not it is due in whole or in part to any act, neglect, omission or default on the part of any servant, Agent or contractor of the Company or by any fault or defect in the terminal facilities or any part thereof.

3. The Company will not be responsible for any loss, damage or delay directly or indirectly caused by or arising from strikes, lockouts or labour disputes or disturbances whether the Company, its servants, Agents or contractors are parties thereto or not, or caused by or arising from an act of God, war, weather conditions, governmental restrictions or any other cause whatsoever over which the Company has no control.

4. If in connection with or by reason of the use or intended use by any vessel of the terminal facilities or any part thereof any damage is caused to such facilities belonging to or provided by the Company, and irrespective of whether or not such damage has been caused or contributed to by the negligence of any servant, Agent or contractor of the Company, and irrespective of whether there has been any neglect or default on the part of the vessel or the Owners or Operators, in any such event the vessel and the Owners or Operators shall hold the Company harmless and indemnified against all such damage and against all such loss sustained by the Company consequent thereon. Further, the vessel and her Owners

or Operators shall hold the Company harmless against all and any claims, damages, costs and expenses arising out of any loss, damage or delay caused to any third party arising directly or indirectly from the use of the terminal facilities by the vessel or by her Master or crew or by any other servant or Agent of the Owners or Operators and further to hold the Company harmless from any claim made by any person in respect of injury or loss of life caused directly or indirectly by the use of the terminal facilities by the vessel.

5. If any vessel sinks or grounds or otherwise becomes, in the opinion of the Company, an obstruction or danger in any part of the port or the approaches thereto and the Owner or Operator of the vessel fails to remove the obstruction or danger within a period to be stipulated by the Company, the Company shall be empowered to take any steps it may deem to be necessary to remove the obstruction or danger and any expenses of such removal shall be recoverable from the Owner of the vessel at the time of the accident causing the danger or obstruction.

6. These conditions shall be construed according to the law of the Commonwealth of the Bahamas and the vessel and her Owners or Operators shall submit to the jurisdiction of the Bahamian Courts.

s,s,/m.v. ....

I hereby acknowledge receipt of a copy of the conditions of use of the Port at South Riding Point by Burmah Oil Bahamas Ltd.

Time & date:........................ Signed: ....

Master

BAHAMIAN LEGISLATION PROVIDES SEVERE PENALTIES, FINE AND/OR IMPRISONMENT FOR THE DISCHARGE OF OIL INTO TERRITORIAL WATERS.

Burmah Oil Bahamas Ltd.
P.O. Box F-2530 Freeport, Grand Bahama
South Riding Point Terminal.
To: Master
s.s./m.v. ....

Dear Sir,

During your stay at South Riding Point Terminal, your co-operation is requested with regard to shipboard visitations by Terminal staff.

With the exception of official visits necessary to the satisfactory performance of cargo and safety operations, none of our terminal staff should board your vessel.

We are particularly concerned in cases where food and drink have been unofficially provided by visiting ships and we would respectfully request that you bring to the attention of your crew, the need to disregard any requests of this nature.

We trust that your compliance and understanding will avoid any embarrassment for your vessel whilst alongside and that as a result our operating attentions will be rendered more efficient.

Thank you.

Terminal Manager

Burmah Oil Bahamas Terminal
South Riding Point, Grand Bahama

Ship:..
Nationality: ....
DWT Tonnage: ....
Draft Forward........................ Aft: ....
Berth No........................ Berthing Master: ....
Date:........................ Time on:............ Time off: ....
Berthing/unberthing: ....
Tugs:..

In consideration of Burmah Oil Bahamas Ltd. furnishing the services of tugs, line handling boats and services, crew/ferry services and a Berthing Master to any vessel for the purpose of assisting in the navigation, docking and servicing of such vessels at the facilities of Burmah Oil Bahamas Ltd., South Riding Point Transshipment Terminal, it is understood and agreed that when the Berthing Master boards such vessel he becomes the borrowed servant of the Owners and Operators of the vessel assisted in respect to giving of orders to any tugs which may be engaged in the assisting service and in respect to the handling of said vessel, and neither those furnishing any tugs, line handling boats and services, crew/ferry services and/or Berthing Masters, nor the Owners, employers, Agents or charterers, Operators or managers thereof or the Berthing Master shall be liable for any losses, damages, delays or liabilities arising from any negligence, incompetence or incapacity of any Berthing Master or the personnel of any tug or tugs line handling boats or crew/ferry boats or arising from any unseaworthiness or any insufficiency of any tug or tugs, line handling boats or crew/ferry boat.

Owner and Operator of the vessel assisted hereby agree to indemnify and hold harmless the aforesaid persons from any and all losses, damages, delays and liabilities whatsoever, whether to third parties or otherwise arising from the acts or omissions of such person or persons.

Master

Barbados

BRIDGETOWN

SHIPMASTER'S REPORT: January 1979.

PILOTAGE: Compulsory. Pilot boards 0.5 miles West of breakwater. Ladder usually required on the port side.
RESTRICTIONS: Vessels able to enter and leave at any stage of the tide. Pilots usually commence berthing and unberthing operations at daybreak.
MAX. SIZE: Max. draft 32 ft.
TUGS: Available. Use of tugs depends on which berth the vessel uses and which side to.
RADIO: Barbados Radio.
VHF: Pilot on Channels 16 and 12.
BERTHING: Vessel berthed at Berth No. 2 which is close to the entrance. Bulk handling facilities available. There is ample equipment for handling palletised cargoes, and ample storage space for breakbulk and palletised cargoes, there is also storage space for containers and sufficient equipment for handling 20 ft. and 40 ft. containers. Accommodation ladder required.
SERVICES AVAILABLE: Fresh water, fresh provisions, repair facilities, machine shop, airport, Lloyds surveyor, laundry services, telex, bunker fuel oil, diesel oil, lubricating oil, doctor, hospital, groceries and meats.

Canary Islands

LAS PALMAS

BERTHING: *Las Palmas and Puerto de La Luz:* 7,660 m. of general quays available with depths up to 19 m. and 1,175 m. of fishing vessel quays.

It is a transit and revictualling port and has installations for the supply of water and liquid fuel.

Work is almost completed on a special berth for large tankers with a draft of 22 m.

China, Peoples Republic of

SHANGHAI

SHIPMASTERS REPORT: January 1979

GENERAL: The vessel followed the recommendations of the latest "Guide to Port Entry" and Admiralty Sailing Directions for approaches to pilot station and entrance buoys.

However, the latest information was cabled to vessel by PENAVICO SHANGHAI, as agents (China Ocean Shipping Co.), as appended below, and confirmed by the Pilot and Harbour official that boarded vessel.

The notable changes are: shift of position of Chang Kiang Kou Light Vessel, and in its 'old position' is new "M-1" buoy; the channel buoys are only 'fractionally different' from those given in latest amendment of Sailing Directions.

Anchorages seem to be variable, and vessels were anchored at both positions indicated by Admiralty Sailing Directions and "Guide to Port Entry"; vessels were also anchored to the North and East of the new position of light vessel.

Pilots are recommending that vessels buy the latest Chinese Charts for up to date information on approaches to Chang Kiang Kou and all the way to the Port of Shanghai, including Woo Sung anchorage; as most charts do not have the latest buoys and Light Floats for the river passage.

Message From Penavico: (NB: Bracketed notations are Master's remarks)

Pilot Station is in 31° 03′ 30″ N, 122° 12′ 00″ E.

Dangerous Area: 30° 47′ 05″ N, 123° 03′ 00″ E. *(These positions*
30° 47′ 15″ N, 123° 05′ 54″ E *are the same*
30° 44′ 45″ N, 123° 03′ 00″ E *as indicated*
30° 44′ 45″ N, 123° 05′ 54″ E *on charts)*

Regular channel: between Chusan and Raffles Islands: routing, Tengting Is, Steep Is, Elgar Is, Bonham Is, Butten Is to Gutzlaff to Chang Kiang Kou, other channels between Chusan – Raffles Islands NOT ALLOWED. *(Again same as publicised . . . but be very wary of concentrations of fishing craft in this area and nets extending some distance).*

Chang Kiang Kou Light Vessel: 31° 03′ 32″ N, 122° 23′ 26″ E. Fl. 6 secs. *(high intensity light).* Light buoys between Chang Kiang Kou light vessel and pilot boat:

"M-1"	31° 03′ 00″ N, 122° 18′ 42″ E.	3 Fl./6 secs.

Red and White Chequered Can Shaped:

"H 12"	31° 03′ 45″ N, 122° 14′ 28″ E.	2 Fl./3 secs. Red.
"H 14"	31° 04′ 11″ N, 122° 12′ 11″ E.	2 Fl./1.5 secs. Red.
"H 16"	31° 04′ 37″ N, 122° 09′ 54″ E.	2 Fl./3 secs. Red.
"H 18"	31° 05′ 03″ N, 122° 07′ 59″ E.	2 Fl./3 secs. Red.

White Chequered Can Shaped:

"H 11"	31° 03′ 49″ N, 122° 15′ 03″ E.	2 Fl./3 secs.
"H 13"	31° 04′ 15″ N, 122° 12′ 47″ E.	2 Fl./1.5 secs.
"H 15"	31° 04′ 41″ N, 122° 10′ 30″ E.	2 Fl./3 secs.
"H 17"	31° 05′ 07″ N, 122° 08′ 14″ E.	2 Fl./3 secs.

Approach to pilot boat at 31° 03′ 30″ N, 122° 12′ 00″ E with a line joining Chang Kiang light vessel and light buoy M-1, as demarcation line for entrance channel/departure channel is at water area within 1,100 m. North or South of demarcation line. With line joining light buoys "H 12"/"H 14"/"H 16"/"H 18" as demarcation line, water area within 1,100 m. South of line open to navigation. ATTENTION: North of line not allowed to navigation . . . end of message.

Vessel's Own Observations:

With regards the latter demarcation line: this means leaving BOTH buoys i.e. "H 12/13", "H 14/15", "H 16/17" and "H 18", on the mariners starboard hand on entering and on the port hand when departing.

Caution: These buoys are very hard to observe in (a) rough sea at night and (b) daylight in similar conditions, however they can be distinguished on the radar screen. The 'run-in' from "M-1" buoy to pilot station is not a straight course as would appear from the demarcation line of the buoys, but would entail 2/3 courses if vessel keeps close to the buoys.

The Pilot on this occasion met the vessel abeam of "H 16" buoy.

There is a VHF service now operating from the pilot station, and information will be passed on Channel 16; Pilots once on board vary their channels but most commonly used is Channel 6.

Penavico have Channel 11, used from the Woosung anchorage; they also say it can be used in port, but Pilots instructions are that it cannot be used in port. There is a set time given to vessels to listen in whilst at the anchorage, again if vessel hasn't Channel 11 for direct communication then Penavico will call through Channel 16 and ask which Channel vessel has available (if nothing suitable then message will be passed on Channel 16).

Echo sounder has to be switched off when the Pilot boards.

Radar can and will be used by Pilots for river navigation and docking purposes, however they will advise vessel on this point.

Pilot boards with "Harbour official" who appears to do the 'initial clearance' whilst proceeding up river; if vessel does not have Chinese entry forms, these will be given to vessel to fill in on way up river. (They would not accept our IMCO forms or vessels forms). The "Harbour official" will also require the Master to present the following: (1) Deadweight of vessel; (2) Summer loaded draft; (3) Light ship draft; (4) Drafts for all conditions, i.e. Winter, tropical; (5) FWA; (6) If vessel has "delta" marks then only the highest gross and nett tonnage is acceptable; (7) BHP/NHP/IHP of main engine; (8) Type of engine; (9) Capacity of fuel oil and fresh water tanks; (10) He will inspect and take down the issue date and expiry date of: Safety Equipment Certificate, Safety Radio Certificate, Safety Construction Certificate, Load Line Certificate, Tonnage Certificate, De-rat, Registry. (Much of this information is again required at main clearance procedure also if vessel's first call at Shanghai, then Penavico will require all the above and more on an official printed form).

Inward bound vessels will generally anchor at Woosung Anchorage for main quarantine clearance, customs clearance and immigration clearance, I found that this was quite straightforward and was done in less than one hour.

On departure the vessel has an 'inspection'; this entails all members of the vessel mustering in an area designated by the officials, whilst they then go through the discharge books/passports and their own issue of 'shore pass'. During this period three men are detailed (one from each department) to go right round the vessel, into every cabin, locker, store rooms, etc., with the port officials.

Movement of vessels takes place 24 hours a day for berthing and unberthing.

Steaming time from Pilot to Woosung Anchorage depends largely on tides and speed of vessel but averages 3 - 6 hours, for berthing from Woosung Anchorage into Shanghai port about 2 - 3 hours. However, there are wharves right throughout the river on both sides, this time only indicates the centre of Shanghai Docks.

Colombia

TURBO

SHIPMASTER'S REPORT: February 1979

PILOTAGE: It is necessary to take a Pilot at Punta Las Vacas for entrance to the bay. Thereafter, any movement inside the bay will also require a Pilot.

France

THIS ENTRY SUPERSEDES ENTRY ON PAGE 313 OF THE MAIN TEXT.

NICE: 43.42 N. 07.17 E.

PORT LIMITS: The Port is situated in the N.E. part of the Baie des Anges (Bay of Angels) between the castle hill and the Boron Mount which form at the Nice Cape a rocky promontory towards the South.

DOCUMENTS: The Captain of a vessel, when he arrives, is required to fill out an entry declaration, a copy of which is handed to him by his Agent or by the Port Captaincy.

A Crew List and a List of Passengers intended for the Port Commissariat must be drawn up before arrival at the port.

All documents required by marine regulations, i.e. health declaration, manifest, vessel's safety plan etc., . . . are required by the port services.

PILOTAGE: The pilot station operates 24 hours a day and is attended by 3 licensed Pilots. Pilotage is obligatory for vessels of LOA 50 m. and over. Pilotage is exempt for vessels of less than 50 m., and if they are equipped with VHF, vessels of less than 70 m. The licence of Pilot is valid for vessels of a length equal to or greater than 120 m. equipped with a bow thruster and VHF. Specialised vessels carrying liquid oil, gas, and toxic products are subject to pilotage.

The pilotage area of Nice-Villefranche extends as far as 3 miles from the coast between the meridians of the left bank of the Var (07° 12′ E.) and of Cap Ferrat (07° 20′ E.). Vessels must, if possible, give warning of their arrival 24 hours in advance, particularly if they intend arriving during night-time hours.

Pilots may be called up by regulation signals during the day and night or by radiotelephone to Grasse Radio or Monaco Radio both stations on VHF Channel, telephone Nice station (85 52 41) or to the Port Captaincy (Tel. 89 50 85).

ANCHORAGE: The coast being very rocky, does not allow anchorage close to the port. The Villefranche Roads, on the other hand, offers a sheltered zone, giving very good anchorage facilities. In the Villefranche Roads, 2 buoys can be used with the permission of the Nice Captaincy, by vessels merely calling at the port or waiting for a place on the quay at the Port of Nice. There is access for vessels of all dimensions.

RESTRICTIONS: The transport and handling of dangerous or infected materials, within the limits of the Nice Port, are subjected to the requirements of decree of the 1st February 1951 which controls the transport and handling of dangerous materials in maritime ports. There is no operation in this respect at night.

All operations, prescriptions, order and stipulations as laid down in the general regulations and the local regulation covering "Port Services" are governed by the Port Commandant.

MAX. SIZE: The commercial port is accessible to vessels of 137 m. in length and 6.50 m. draft.

HEALTH: Health control at the frontiers is subject to the measures prescribed by the international health conventions; the functions of health police and health guard are entrusted to an Agent in the service of Customs and Excise. Urgent medical help can be obtained through the intermediary of the radio stations of Monaco and Grasse who establish contact directly with the department concerned.

VHF: The Port Captaincy listens out from 0600 to 2200 hrs. in Winter and from 0500 to 2400 hrs. in Summer on Channel 16 (for calling up and emergency). There are 2 channels i.e. 9 and 12 for communication purposes. No communication of a private nature may be handled.

RADIO: None.

RADAR: None.

TUGS: None.

BERTHING: Length of usable quays 1,497 m. having a depth of 5.0–6.5 m. and 10 berths available.

CRANES: Quai Infernet: 2×5 tons cranes on rails (scoop and hook).
Douane: (Customs Quay) 1 fixed pivoting crane of 30 tons capacity (hook).
Ribotti: 1 crane on rails of 3 tons capacity (hook).
Commerce: (Commercial Quay) 2 cranes on rails of 6 tons capacity (scoop and hook).
Commerce: (Commercial Quay) 2 hoppers of 50 cu.m. capacity – on rails. 2 Nellen cranes on tyred wheels, capacity 4.2 tons at the end of the jib and 8 tons at 6 m. (with tackle block).

FRESH WATER: It is possible to take on fresh water at all quays by connection to the main supply. Average rate of supply 15 t.p.h. – price 3.57 Fr. per ton.

FUEL: All types available.

FIRE PRECAUTIONS: The town provides fire fighting facilities. The fire station is close to the Port.

CONSULS: Algeria, Germany (Federal), Austria, Belgium, Brazil, Colombia, Ivory Coast, Republic of Benin, Denmark, Dominican Republic, Spain, U.S.A., Finland, Gabon, Greece, Ireland, Iceland, Italy, Liberia, Luxembourg, Mauritania, Monaco, Niger, Norway, The Netherlands, Peru, Philippines, St. Marino, Sweden, Switzerland, Tunisia.

REPAIRS: All possible deck and engine repairs can be carried out. There is no dry dock. Hull careening is carried out by underwater procedure.

SURVEYORS: Lloyds of London, The Coasting Mediterranean Company, The Venturer Company, Weir (S.A.), Societe Azureenne de transports et d'affretements Maritimes, Societe Nationale Maritime Corse, Mediterranee, Pittaluga & Co., Martini & Co., Cie Charles le Borgne, Cie Fabre, Cie Fraissinet, Cie Messageries Maritimes, Nautilus Line, Barry Rogliano et Cie.

HATCHES: Hatches are opened and closed by crew.

CUSTOMS ALLOWANCES: 30 cigarettes per person per day; 1 litre of aperatif per 6 persons per day.

CARGO HANDLING FACILITIES:

Material Handling Equipment: All the handling equipment is supplied by the stevedores. 1 forklift of 4 tons capacity and 11 forklifts between 4 and 8 tons capacity.

Storage facilities: 45,000 sq. m. of open air areas. Specialised equipment for the discharge of bulk equipment (pyrite, clinker, mineral etc . . .)

1 specialised berth equipped with a vat-type storage system, for bulk liquids (oil or wine).

Unloading or loading capacity – cement 1,400 tons per day; various: 400 tons to 700 tons per day and per gang; ores in bulk: 1,200 tons per day with 2 hoppers, 2 cranes and 2 gangs. Bulk liquids 20 tons per day.

Facilities for Specialised Goods: 3 adjustable platforms for Ro-Ro traffic. Height of quays 1.23 m. and 3.06 m.

BRIDGES: None.

STEVEDORES: 87 professional dockers; 10 occasional dockers.

Employer – Bureau Central de la Main d'Oeuvre (B.C.M.O.) of the Port of Nice.

MEDICAL: Hospitals are situated in the town and give excellent treatment in the case of accidents or illnesses of any nature whatsoever.

Passengers coming from foreign countries are required to abide by the prescriptions of international agreements (vaccination certificates, health certificates, etc.).

TANKERS: No specialised installations. Only vessels carrying black products are accepted where the load does not exceed 2,000 tons. They may come alongside one of two quays specially designated for this purpose.

DENSITY: *Salinity:* varies between 34 gr. and 38 gr. per litre.

REPATRIATION: Airport and railway network in the town.

AIRPORT: International Airport 4 km. from the Port. Principal countries are served by international airlines.

TIME: GMT plus 1 hour (Winter). Summertime kept from April to October.

HOLIDAYS: These are staggered as far as dockers are concerned so that there is continuity of operation.

POLICE/AMBULANCE/FIRE: Police tel. 55 91 22 and 17; Ambulance tel. 89 70 70 and 18; Fire Brigade tel. 89 80 80 and 18.

TELEPHONES: Telephones can be installed on board at Papacino Quay, Entrecasteaux Quay, Quai du Commerce, Quai de la Traverse, and Quai Ribotti.

SHORE LEAVE: Crew members may dismbark after checking with Police.

IDENTIFICATION CARDS: For foreign seamen a permit to come ashore is issued by the Port Police.

DEVELOPMENTS: A new port is under construction to the South of Nice Airport, and will be open to passenger vessels in 1980-81 and to other activities in the following years.

GENERAL: There is a bus and taxi service very close to the port also there are coastal trading entities within the Port precincts.

AUTHORITIES: Port Captain, Port Directorate.

Gabon

OVENDO

SHIPMASTERS REPORT: February 1979.

DOCUMENTS: Ship's Papers (sighted), Crew Lists (5), Passenger Lists (5), Port of Call (4), Crew's Custom Declaration (1), Marine Health (1), Arms and Ammunition (1).

PILOTAGE: Pilot boards by tug which is compulsory for docking and undocking. Vessels berthed head out for sailing.

APPROACHES: Gambia Lighthouse range 20 miles is easy to pick up, channel is well marked by buoys with good radar reflectors. No Pilot is available for the channel. After last buoy proceed directly to anchorage.

Soundings taken throughout channel showed a least depth of 20 m.

ANCHORAGE: Waiting anchorage is 0.5 to 1 mile West of the wharf.

BERTHING: A new port has been built about 4 miles South of old lighter jetties at Libreville, consisting of 1 wharf at right angles to the shore in 15 m. of water, capable of docking 2 ocean-going vessels.

STEVEDORES: Slow but efficient, about 6 tons per gang man hour.

REPATRIATION: Airport 12 miles from port, 6 flights per week direct to Paris.

TRANSPORT: Available by bus or taxi to the town.

SHORE LEAVE: Allowed.

SEAMEN'S CLUB: Within 1 mile of port with bar and swimming pool.

AGENTS: Keeps watch on VHF Channel 16.

Honduras

LA CEIBA: 15.46 N. 86.50 W.

SHIPMASTER'S REPORT: February, 1979

DOCUMENTS:

10 copies of Crew List
6 copies of Store List
6 copies of Bonded Stores List
4 copies of Vaccination List
Mail Report
Passenger Report

PILOTAGE: Compulsory. Pilot boards 0.5 miles from the pier. Two hours notice required.

ANCHORAGE: Good anchorage 5 cables, 129° from pier, depth of water 40 ft.

RESTRICTIONS: Vessels able to berth and unberth at any stage of the tide day or night. Limiting factors are length and forward draft of vessel.

MAX. SIZE: Max. LOA 600 ft. However, the after end of the vessel would overhang end of berth (This vessel loaded to 23 ft. draft).

HEALTH: Quarantine officials operate between 0600 hrs. and 1800 hrs. Two hours notice of arrival required.

RADIO: HRW – Standard Fruit operate from their own radio station. They handle vessels traffic on 6350.5, 8560 and 12750 kc/s. They also listen on 500 kc/s. and 8 mc/s.

Hours of operation: (GMT) 1355–1410, 1455–1510, 1555–1610, 1955–2010, 2055–2110 and 2355–0010.

VHF: The Agent is on Channel 16.

TUGS: Not available. Vessel is able to dock and undock with assistance of tugs.

BERTHING: One berth only available which is a finger type pier at right angles to the shore. Nature of the bottom at the berth is sand. Vessels normally berth port side to, and load through the side doors.

Mooring gang (6 men) come aboard with the Pilot to assist. The bananas are loaded direct from the rail cars using spiral elevators. It is usual to load all decks at the same time.

There are no facilities for handling bulk cargoes or Ro/Ro vessels. There are no shore cranes or floating cranes. There is no storage space for breakbulk cargo or palletised cargo.

Fendering: Pier fendered with the usual Standard Fruit type fendering, vertical uprights on a horizontal "V" bellows on horizontal girders.

CHARTS: B.A. Chart No. 513 (Isla Roatan to Puerto Cortes) and U.S.G. 5393 (positions on this chart are 2.5 miles West South West of British Admiralty chart).

CONSULS: None.

SERVICES: Fresh water, fresh provisions, airport, telex, doctor, hospital, groceries and meats all available.

Labour: Shore labour is available for contract work such as scavenge cleaning, hull painting, etc. The work carried out during our stay was satisfactory and the rate for the foreman was US $1.50 per hour and workmen US $1.00 per hour.

Indonesia

THIS ENTRY SUPERSEDES ENTRY ON PAGE 415 OF THE MAIN TEXT.

MACASSAR: 05.08 S. 119.24 E.

DOCUMENTS:

Certificate of Registry
Crew List
Log Book
Certificate of Seaworthiness
Load Line Certificate
Radio Certificate (Solas Certificate)
Health Certificate
Equipment Certificate (Solas Certificate)

Shipping documents as follows:

Manifest of cargo
Bills of Lading
Charter Party (if necessary)

PILOTAGE: Pilotage compulsory for vessels of more than 150 cu.m. in gross volumes.

To order a Pilot:

1. Contact the ship's Agent in this port via Macassar Radio (call sign PKF) by ship's radio or VHF Channel 16.

2. Also contact Macassar pilot's station tower by VHF Channel 16.

Pilotage Information:

1. Every vessel of 71 m. LOA and over under Pilot's direction for berthing and unberthing is to use the Port Administration tugs.

There are 2 tugs available with initial letters "PA" on their blue funnel,

M.T. "Anggada VII" 800 h.p.
M.T. "Selat Tanakeke" 1,160 h.p.

2. Every vessel of 31 m. LOA and over, under Pilot's direction for berthing and unberthing is to be assisted by Port Administration mooring boat.

ANCHORAGE: The anchorage for vessel's awaiting a Pilot is around the position 05° 07′ 30″ S. and 119° 22′ 30″ E. with depth of water 25 m. at LWS.

RESTRICTIONS: Every foreign vessel is to have special permission from Indonesian Government or Directorate General of Sea Communication for entering and should have representatives or handling Agent before entering this port.

Warships should contact the Indonesian Navy Commander of Territory VII (Pangdaeral VII) before entering the port.

MAX. SIZE: No length or beam restriction. Depth alongside is governing factor.

RADIO: See "Pilotage".

TUGS: See "Pilotage".

BERTHING: *Depths of water:*

Main entrance channel: 13 m. at LWS.
Soekarno wharf: 8.5 m. to 9 m. at LWS.
Hatta wharf: 8.5 m. at LWS.
Oil Jetty (Pertamina Jetty): 8 m. at LWS.
Anchorage in the inner waters: 11 m. at LWS.

Special attention in West monsoons (November to February):

All vessels alongside Soekarno and Hatta Wharf should use fore and aft mooring lines to buoys which are available, to prevent the beating of ship's hull against the wharf.

STEVEDORES: Stevedoring by Port Labour (UKA). Capacity for discharging: 12 ton gang/hour – General Cargo. 17 ton gang/hour – Bulk Cargo (in bags). No heavy cranes available.

MEDICAL: Doctor and clinic available.

FRESH WATER: Available rate 50 t.p.h.

FUEL: Available, NFO 50 t.p.h.

GANGWAY/DECK WATCHMEN: There are not special deck watchmen services but can be arranged through Agent.

OPENING/CLOSING HATCHES: Work carried out by stevedores.

CUSTOMS ALLOWANCES: Tobacco. Only sufficient for personal use (500 grams tobacco or 200 cigarettes for one passenger).

Wine and/or spirits not permitted out of bond.

IDENTIFICATION CARDS: Needed by Immigration Office.

CONSULS: Japan and Norway.

REPAIRS: Minor deck or engine repairs possible.

AIRPORT: Macassar Airport, called "Mandai Airport", distance from town about 23 km.

Services: Macassar-Kendari and Jakarta – Surabaya-Macassar Manado every day (3 times a day).

TIME: Middle Indonesian Time, GMT plus 8 hours.

HOLIDAYS: Every Sunday; New Year (January 1st); Idul Adha (November 11th); 1st Muharam 1399 H. Isa Almasih (May 15th); Proclamation Day (August 17th); Mi'radj Muhammad (July 3rd); Idul Fitri (September 9th); Maulud Muhammad (February 20th); Santa Maria (May 15th); Christmas Day (December 25th). Work can be arranged at overtime rates.

POLICE/FIRE/AMBULANCE: Police, Fire 4306. Ambulance 7227.

TELEPHONES: No arrangements exist for placing telephones on board.

DELAYS: Caused by rain (bad weather).

DEVELOPMENTS: In near future, Macassar to have bonded warehouse.

AUTHORITY: Department of Communication, Directorate of Sea Communication, Shipping Region VI, Port Administration Macassar.

Iran

SIRRI ISLAND TERMINAL

LOCATION: The jetty is located at the S.E. point of Sirri Island.

PILOTAGE: Harbour Master boards to berth vessel.

ANCHORAGE: Vessel should anchor in position 25° 54′ N, 54° 34.5′ E., (about 1 mile to the East of the lighthouse on the Island) in 20 fathoms of water. The Pilot (Harbour Master) will board from a tug in this position.

MAX. SIZE: 350,000 d.w.t.

An oil company advises us that the depth of water alongside is 28 m. and max. draft 24 m.

RADIO: Vessels should send ETA to "Sofiran – Tehran" Telex No. 212779 via "EQK".

TUGS: 2×4,000 h.p. available.

BERTHING: A mooring gang and tugs will assist with berthing operations.

AGENT: Gulf Agency Co., Khorramshahr will attend.

Israel

ASHDOD:

SHIPMASTER'S REPORT: December 1978

PILOTAGE: Compulsory. Pilot boards off the breakwater. Pilot requires 1 hours notice of vessels arrival.

ANCHORAGE: Outside breakwater.

RESTRICTIONS: Vessels able to berth and unberth at any stage of the tide day or night.

HEALTH: Radio pratique possible. Quarantine officials require 12 hours and 24 hours notice of vessel's arrival.

RADIO: Haifa Radio.

VHF: Channels 16, 12 and 14. Pilot and Port Authority both use Channel 14.

TUGS: Tugs available and are used depending on berth.

BERTHING: Vessel berthed at berth No. 4/190. Exact location is No. 1 North pier. Conditions at the berth poor due to swell and undercurrent. Nature of the bottom sand/mud. Bulk handling facilities for handling phosphate available in the port. There are 30 quay cranes available including 1 floating crane of 70 tons capacity. Ro/Ro facilities available. There is ample mechanical equipment for handling of palletised cargoes. There is also adequate storage space for breakbulk and palletised cargoes. There are 3 gantry cranes available for handling containers, also ample storage space for containers. Accommodation ladder required.

DENSITY: 1025.

IDENTIFICATION CARDS: Crew members to have passport photograph for landing pass (this is best carried out at previous port).

SERVICES AVAILABLE: Fresh water, fresh provisions, repair facilities, machine shop, Lloyds surveyor, salvage surveyor, laundry services, bunker fuel oil, diesel oil, lubricating oil, doctor and hospital, groceries and meats.

SHIPMASTER'S REPORT: January 1979.

DOCUMENTS:

1 Police Condition Slip
1 Customs Condition Slip
3 Crew Lists
1 List Ship's Stores and Bond

PILOTAGE: Compulsory. Pilot boards 0.5 miles from breakwater.

RESTRICTIONS: Vessels may berth and unberth at any stage of the tide day or night.

HEALTH: 24 hours before arrival request radio pratique from "Quarantine Haifa".

RADIO: Haifa 4X0.

VHF: Pilot and Port Authority on Channels 16 and 14.

TUGS: 3 tugs available 1×3,000 h.p., 1×1,500 h.p., 1×1,000 h.p. The use of tugs depends on which berth used and also which direction the vessel will be heading.

BERTHING: North Quay: Berths 101, 102, 103: berths located just inside the breakwater, max. draft permitted 10 m., density alongside 1029. Accommodation ladder required.

BULK HANDLING FACILITIES: Phosphate loading facilities available.

CRANES: 9×30 tons at 15 m. (15 tons at 25 m.).
9× 8 tons at 15 m. (4 tons at 25 m.).

Ample mobile cranes available. There is 1 floating crane with at least 50 tons capacity.

SPECIAL CARGO HANDLING FACILITIES: Ro/Ro facilities available. 3 container gantries available. Ample storage space for breakbulk cargoes, palletised cargoes and containers.

STEVEDORES: Labour normally refuses to rig derricks or handle hatches.

Working Hours: Sunday to Thursday (inclusive):
First Shift 0630 and 1400 hrs.
Second Shift 1500 and 2145 hrs.
Friday:
First Shift 0630 to 1300 hrs.
Second Shift 1300 to 1530 hrs.
Saturday — No work.

SERVICES AVAILABLE: Fresh water, fresh provisions, repair facilities, machine shop, Lloyds surveyor (from Haifa), salvage surveyor (from Haifa), laundry services, bunker fuel oil, diesel oil, lubricating oil, doctor and hospital, groceries and meats. Nearest airport is at Tel-Aviv.

Italy

ORISTANO, Sardinia: 39.45 N. 08.30 E.

LOCATION: Oristano is situated on the West coast of Sardinia in the Gulf of Oristano. Oristano is the chief town of the province of Oristano and the population is in the region of 29,000.

BERTHING: The port consists of 2 harbours. The outer basin being located between the 2 breakwaters and used for general cargo purposes and the inner basin being the industrial harbour. The manoeuvring area between the outer and inner basin has a diameter of 450 m. and depth of 12 m. The depth of both outer and inner basins is 12 m. The outer basin when completed will have berthing space of 1,240 m. and the inner basin (for industrial traffic) will have 2,500 m.

MEDICAL: 2 hospitals with 280 beds.

AIRPORT: Civil airport at Cagliari, Alghera and Olbia (daily connections to Rome, Milan, Naples, Bergamo, Pisa, Turin, Venice and Nice) are only 1 hour's drive from Oristano by car.

SHIPMASTER'S REPORT: January 1979.

Port under construction.

This vessel (LOA 299 ft. Extreme breadth 43 ft. 9 in. draft 16 ft. 10 in.) was the fifth vessel to call at the port. We were unable to obtain Chart 3917 however, Chart 161A together with information given in sailing directions proved sufficient for the vessel to be brought to the anchorage.

PILOTAGE: The Pilot advises that he wishes to be embarked close to a buoy in position 39° 53′ N., 08° 31′ E. which is indicated on Chart 3917. The pilot boat is a small open boat and does not have any distinctive marks. This boat would not be suitable for taking out to the 'Gulf' especially with a strong Westerly wind.

The Pilot brings the buoy astern and then proceeds on the course of approximately S.E. directly towards the harbour entrance.

ANCHORAGE: Agent requested vessel to anchor about 2 miles off "Grande Torres".

VHF: Not available.

RADIO: The Agent requested an accurate ETA as he makes arrangements for the Pilot and on seeing the vessel at the anchorage notifies the receivers by telex. This is then followed by a written notice of readiness of berthing.

BERTHING: The grain silo berth is at the North side of "Canale Industriale" at its mid-length. This vessel swung with the aid of the port anchor and berthed starboard side alongside.

The quay is constructed of solid concrete and rises to a height of about 8 ft. above the water level. At the water line there is a ridge of about 9 in. extending along the whole length of the quay. Rubber fenders about 2 ft. in diameter are chained to the face of the quay at approximately 120 ft. intervals.

Once the vessel is alongside and against the fenders, it is protected from the concrete ridge but during berthing it would be possible to land on the projection because of the spacing of the fenders.

Bollards are also approximately 120 ft. apart except for one situated ahead of the vessel which is approximately 150 ft. from the next one aft. They coincide with the fenders.

The breakwater protects the harbour but difficulty may be experienced alongside due to swell following strong winds from a Westerly direction.

PORT FACILITIES: Access to the vessel by road vehicle and fresh water facilities are still to be provided.

Harbour does not appear to provide any fire fighting facilities and when the grain silo is closed there is no telephone available.

It is about 10 miles by car to Oristano and the Agent's office. Half of the journey is by unmade road. There are no ship chandlers or repair facilities available in Oristano. Taxi drivers are reluctant to drive their vehicles over the rough ground and made additional high charges for the journey. The ship's agency was very helpful and went to great lengths to arrange for ship's laundry and to have water delivered to the vessel by truck. They also made some purchase of small items for the vessel.

The port of Oristano is likely to become a large complex and it must be assumed that provision of services to ships will be developed.

Japan

THIS ENTRY SUPERSEDES ENTRY ON PAGE 545-546 OF THE MAIN TEXT.

NISHIHARA (Buckner Bay), Okinawa: 26.14 N. 127.50 E. (See Plan Book)

LOCATION: The Nansei Sekiyu Ltd. Refinery is located in Nishihara village on the East coast of Okinawa, towards the Southern end of Nakagusuku Bay (Buckner Bay). Also see "Max. Size". There is also a Nihon Sekiyu Terminal-SBM about 1 mile North of the NSS SALM.

DOCUMENTS:

3 Manifests
6 Crew Lists
1 Passenger List
1 Store List
1 Personal Effect List
For Customs, Quarantine and Agents' Use.
Ship's Register
International Loadline Certificate
Safety Equipment Certificate
Derating Examination Certificate
Last Port Clearance.

Each Crew member will be issued with an Official Pass, which must be returned prior to vessel sailing.

PILOTAGE: Normally vessels will be expected to enter Nakagusuku Bay through entrance marked Tatsu Kuchi, and pick up Berthing Master inside bay – South of Tsuken Jima. Inside bay Berthing Master requests that vessel keeps South of buoy marking Chikunigaa Shoal. Berthing shall be carried out at day time only.

A safe convenient pilot ladder is to be provided for the Berthing Master. Berthing Master stays aboard vessel throughout discharge, except vessel berthed at the pier.

ANCHORAGE: Navigation and anchorage in the waters near the NSS product pier and crude berth will in so far as possible be restricted to those ships directed into these waters by Berthing Master. In the interests of safety, ships will not enter the restricted area unless so directed by Berthing Master. The restricted area is within the following boundaries:

Beginning at a point described as 26° 13′ 33.88″ N. Lat. and 127° 47′ 30.24″ E. Long. (N. 25,074.89, E. 29,145.48); thence running S.60° 00′ 00″ E. a distance of 200 m. to an angle point described as Lat. 26° 13′ 30.62″ N., Long. 127° 47′ 36.48″ E. (24,974.89, N. 29,318.69 E.); thence running S. 35° 40′ 45″ E. a distance of 1,170 m. to an angle point described as 26° 12′ 59.69″ N. Lat. 127° 48′ 00.98″ E. Long. (N. 24,024.88, E. 30,000.82); thence running N. 45° E. a distance of 3,350 m. to a point on the circumference of a circle described as 26° 14′ 20″ N. Lat., 127° 49′ 30″ E. Long.; thence running to the right a distance of 3,170 m. along said circumference, which is described by a radius of 1,060 m. with its centre located at 26° 13′ 56.18″ N. Lat., 127° 50′ 00.00″ E. Long. (N. 25,771, E. 33,300) to a point on the circumference described as 26° 13′ 30″ N. Lat., 127° 50′ 22″ E. Long. thence running S. 48° W. a distance of 1,780 m. to the Nakasone buoy located at 26° 12′ 54.2″ N. Lat., 127° 49′ 37.5″ E. Long. thence running S. 53° W. a distance of 1,940 m. to the Wara reef located at 26° 12′ 17.7″ N. Lat. 127° 48′ 45.0″ E. Long., thence running W. 18° N. a distance of 2,810 m. to a buoy located at 26° 12′ 44″ N. Lat., 127° 47′ 07″ E. Long., thence running N. 17° W. a distance of 710 m. to a point at 26° 12′ 46.42″ N. Lat., 127° 47′ 56.61″ E. Long., (23,616.16, N. 29,880.55 E.).

MAX. SIZE: For crude vessels a single point mooring (SALM – Single Anchor Leg Type Mooring), capable of handling vessels from 90,000 d.w.t. to 270,000 d.w.t. is established in approximate position Lat. 26° 14′ N. Long. 127° 50′ E. about 2.5 miles offshore.

Products are shipped from a pier connected to the shore – the pier has 2 berths, one for vessels up to 65,000 d.w.t. and one for small vessels up to 4,000 d.w.t.

PRATIQUE: Port Officials will board the vessel after berthing.

RADIO: Crude vessels discharging at Nishihara should report ETA at pilot station (Lat. 26° 13′ N., Long. 127° 52′ E.) 72, 48, 24 and 12 hours prior arrival. Berthing instructions and time of Pilot boarding will be relayed by a telegraph appointed Agent. Refinery has no VHF radio.

Weather reports essential – particularly during typhoon season. Naha Radio – JCX medium wave 500 kHz. Traffic lists broadcast at odd hours GMT. Short wave 6470 kHz, traffic lists broadcast at even hours GMT.

TUGS: 2 tugs and a launch are available for assisting with mooring and unmooring. The Berthing Master in consultation with the Master will decide the number of tugs required for the berthing operation and for standby during the time at berth.

CRUDE BERTH: Single buoy mooring with vessel secured by 2 heavy polypropylene lines from buoy. Lines connected to chains through bow mooring lead and secured inboard. Chains secured direct to Brega Pin or by double mooring wire or mooring rope (polypropylene 8 in. or over) to bollards, port and starboard side of forecastle head. There is 72 ft. of water at buoy position. Vessels may remain in berth in winds of up to 50 m.p.h.

Floating hoses: 2×24 in. into 2×20 in. connected to 2×16 in. are connected on vessel's port side. There is a 42 in. line from buoy to shore. The maximum pumping rate is 75,000 b.p.h.

PRODUCT PIER: A 110°-290° orientated pier allows tankers to approach the berth in a ballasted condition in either of 2 opposite directions. Vessels of 4,000 d.w.t. size and above will be handled at Berth No. 1 and smaller vessels at Berth No. 2

The water depth at the pier is approximately 47 ft. The extreme tidal variation is +7.9 ft. to −1.0 ft. and maximum storm tide will add approximately 3 ft. The maximum current is less than 1 knot.

Berth No. 1 is equipped with 1×16 in. loading arm for clean products and 2×16 in. loading arms for dark products. Each of these all-metal hydraulically controlled loading arms is fitted with a remotely operated coupling device to connect to a nominal 10 in. ASA, DIN or BS flanged connection without bolting.

Berth No. 2 is equipped with 2×6 in. loading arm for dark and clean products. These arms are part metal, part hose and are fitted with flanges to be bolted to a nominal 6 in. ASA, DIN or BS flanged connection.

Bunker fuel is available at both berths through meters and 4 in. hose connections. Each berth is provided with a gangway.

Vessels will deballast through the loading arms into a 24 in. ballast water line leading to refinery tankage. Under no circumstances should vessel discharge any ballast water directly into the bay.

Fire protection at the pier consists of a foam concentrate tank and proportioning pump, a fire water pump and distribution system, fixed combination water-foam monitors and air-foam play-pipes.

OIL POLLUTION WARNING: We wish to alert all vessels entering this port of the extreme sensitivity on the port of the community and governmental authorities regarding any incident involving oil pullution of the seas. Any oil spill, regardless of size, is considered a criminal act, and offenders are dealt with accordingly. We urge all vessels to make complete pre-arrival checks for cargo and ballast system tightness, and to strictly adhere to all pollution prevention practices, procedures and policies while discharging or deballasting at this port. Officers and crews should be extremely alert during all phases of vessel operation for potential oil spill risks and seek assistance from shore representatives should any unusual risk arise.

TIME: GMT plus nine hours.

SHORE LEAVE: Shore leave is permitted – launch service may be arranged but is at vessel's expense.

No person will be given permission to enter the refinery unless they are in the microbus which will be provided by ship's Agent.

AUTHORITY: Nansei Sekiyu Limited, Nishihara Refinery, Okinawa.

Korea (Republic of South)

CHINHAE

SHIPMASTER'S REPORT: February 1979

PILOTAGE: Pilotage for the Port of Chinhae is compulsory, Pilots only available during daytime.

Pilots board in position 35° 02′ N., 128° 47.5′ E. Ships waiting for a Pilot should anchor in the recommended anchorage situated North-east of the recommended track 306°/126° and extending from about 1 mile West to about 2 miles South-east of Yon Do Island.

PROHIBITED ANCHORAGE AREA: A "Prohibited Anchorage Area" is situated between the existing prohibited area (in approx. position 35° 00′ N., 128° 45′ E.) and the Western shore of the Kadok To Island.

The Northern limit of the "prohibited anchorage" area consists of a line running from position 35° 01.4′ N., 128° 47.2′ E. in a 070° direction to the Western shore of Kadok To Island.

The Southern limit consists of a line running from position 34° 58′

N., 128° 47.3′ E. in a 061° direction to the Southernmost point of Kadok To Island.

According to the naval authorities, anchoring within the above mentioned area is prohibited because of existing submarine cables.

BUOYS: The red conical Buoy "No. 14" in position 35° 04.9′ N., 128° 42.1′ E. is reported non-existent.

The red conical lightbuoy in position bearing 135° and 8.5 cables from the above mentioned Buoy No. 14 is also reported non-existent.

The black conical lightbuoy Gp Fl(2) 6 sec. in position 35° 04′ N., 128o 42.8′ E. is to be moved 4 cables in a 043° direction.

Malaysia

PASIR GUDANG, Malaya: 01.26 N. 103.54 E.

LOCATION: The port is situated on the Malaysian Coast of the Straits of Johore, 10 nautical miles East of Johore Bahru Town. The coordinates are: Lat. 01° 26′ 06″ N., Long. 103° 54′ 25″ E.

PILOTAGE: Pilotage is compulsory for vessels exceeding 45 m. (150 ft.) entering or leaving the Port Water Limits. Pilotage is provided by the Authority. The pilot boarding point is within the vicinity of Johore Shoal Buoy in position Lat. 01° 18′ 51″ N. Long. 104° 06′ 30″ E.

APPROACHES: *Fairway:* There is no limitation imposed on size of vessels passing through the fairway except for the draft. The main channel in the East Johore Strait has a depth of water up to approximately 11.6 m. (38 ft.).

ANCHORAGE: Anchorage areas have been designated within the port water limits for the following:

(a) General purposes.
(b) Dangerous goods and explosives.
(c) Quarantine.
(d) Petroleum.
(e) Lay-up.

RADIO: Vessels can communicate direct with the pilot control station tower via ship to shore VHF on the following Channels:

Channel	*Ship Stations*	*Shore Stations*
11	156.550 mHz	156.550 mHz
21	157.050 mHz	161.650 mHz
(Listening Frequency only) 63	156.175 mHz	160.775 mHz

VHF network links the tugs, launches and the Authority's personnel working on board vessels at the anchorages.

TUGS: Tug service is available for towage, berthing and unberthing operations within the port's water limits. This service is provided by the Authority's tugs and supplemented by privately operated tug companies. The tugs are mostly equipped with fire fighting and anti-pollution equipment.

FACILITIES: *Oil Jetty:* Depth of water 11 m. (36 ft.), L-shaped with 2 berths.

Ocean Wharves: Depth of water 11 m. (36 ft.), length 732 m. (1,200 ft.).

Coastal Wharf: Depth of water 5.5 m. (18 ft.), length 107 m. (350 ft.).

Transit Shed: 10,950 sq.m. (118,800 sq.ft.).

Godown: 5,400 sq.m. (59,400 sq.ft.).

Open Sided Shed: 10,950 sq.m. (118,800 sq.ft.).

Open Storage Yard: 3.24 hectares (8 acres).

Palm Oil Tank Installation: Present capacity for crude 31,000 tonnes. Future capacity for crude and refined 55,500 tonnes.

Liquid Chemical Installation: Present capacity 1,000 tonnes. Under construction 4,000 tonnes.

Grain Silos: 21,000 tonnes.

Fertilizer Storage: 30,000 tonnes.

Proposed Timber Terminal: 6.07 hectares (15 acres).

Proposed Warehousing and Distribution Area: 3.24 hectares (8 acres).

Other facilities such as bauxite, ore and woodchip jetties as well as a shipyard (Malaysian Shipyard and Engineering) are available and operated by private companies. The shipyard undertakes repairs and docking to vessels up to 400,000 d.w.t.

Shore Equipment:

	Capacity	*Unit*
(a) Sideloaders	52,000 lbs.	1
	9,000 lbs.	5
(b) Mobile Cranes	28 tonnes	2
	10 tonnes	2
(c) Forklift Trucks	13,000 lbs.	3
	6,000 lbs.	14
	4,000 lbs.	6
(d) Towing Tractors	4,000 lbs. Drawbar pull	1
	2,000 lbs. Drawbar pull	3
(e) Trailers	15 tonnes	5
	6 tonnes	12

Floating Equipment:

(a) Tugs	Two – 1,800 b.h.p.
	Two – 350 b.h.p.
(b) Launches	Two – pilot launches
	Two – security launches
(c) Lighters	Eight – 100 tonnes steel barges
(under construction)	Two – 100 tonnes flat-top steel barges

SHIPMASTER'S REPORT: February 1979.

PORT LIMITS: All the area of water enclosed on the West by a line drawn due South from Tanjung Bin (01° 12′ N. 103° 32.8′ E.) on the North by the Southern shores of the State of Johore, on the East by a line drawn 299° from Tanjung Stapa (01° 20.6′ N. 104° 08.2′ E.) and on the South by the limits of territorial waters of Johore, including the Johore River up to the bridge where the Johore Bahru to Kota Tinggi road crosses.

DOCUMENTS:

Customs: 2 Personal Effects Lists, 2 Narcotics Lists, 2 Arms and Ammunition Lists, 2 Stores Lists made out on ships forms only, no special forms issued by the port. Customs Boarding Officer also requires a full and correct statement of all dutiable liquor and tobacco carried as ships stores, the statement which is to be submitted in duplicate on forms provided by the Boarding Officer is to show in detail the quantities of dutiable goods held (a) in the ships stores, bars, and shops, (b) in the possession of Officers and Crew.

Immigration: 3 Crew Lists, all Crew Seamans books for entry Visa stamp.

Port Health: 1 Vaccination List, Maritime Declaration of Health.

Police: 1 Crew List.

Agent: Last Port Clearance, Manifest, Bills of Lading, Ships Certificates, Crew Agreement (Articles).

PILOTAGE: Pilots board off Johore Shoal Buoy, request for Pilot to be made via Agents. Confirmation of Pilot boarding obtained from Johore Port Control, VHF Channels 11, 21 and 63.

Pilot launch is a fast motor cruiser, with twin outboards.

Pilotage is compulsory for all vessels over 45 m. in length.

ANCHORAGE: Ships proceeding to call at any of the docks within Johore Port Limits, may be requested to use the anchorage to the East of the pilot boarding ground, or the Johore River anchorages which are about 1 mile North-East of Pulau Ubin. These 2 anchorage areas occupy about 3.5 square miles, with various depths. Vessels may also anchor approx. 0.6 miles E.S.E. off Pasir Gudang wharf, for large vessels there is a mooring buoy to restrict swinging into the channel.

RESTRICTIONS: Pilotage service for vessels entering or leaving Johore Port are at present for arrival 0600–2100 hrs. for departure 0600–2300 hrs.

MAX. SIZE: The navigational conditions in the Straits are adequate for vessels of sizes expected to call at Johore Port as determined by depths at Ocean Wharf, Oil Jetty, and Coastal Wharf. No limitations on the size of vessel passing through the fairway except for controlling draft in the East Johore Channel of up to approx. 11.6 m. Large vessels up to 400,000 d.w.t. can navigate the Straits in ballast proceeding to Malaysia Shipyard also situated in Pasir Gudang.

HEALTH: Vessels Agent to give advance notification to the Health Officer, if possible 48 hours prior to ETA of vessel, together with a list of ports visited within the preceding 14 days. Vessels from infected ports, or without valid derat exemption certificates, or with cases of sickness or death on board, must fly the quarantine flag, and proceed to quarantine anchorage until boarded by the Port Health Officer.

RADIO: Singapore Radio 9VG is the most reliable, and messages are telexed direct to local Agent in Johore Baru.

VHF: The base station is situated at Pasir Gudang, Channels presently in use are 11, 21 and 63.

TUGS: 2 tugboats of 1,800 h.p., 2 tugboats of 350 h.p. Tugs normally meet vessels off the wharf, or at anchorage when mooring to buoy. Tugs lines used.

BERTHING: Oil Jetty: Depth alongside 11.0 m.; "L" shaped jetty, with 2 berths. Ocean Wharves: Depth alongside 11.0 m.; length of wharf 732 m. Coastal Wharf: Depth alongside 5.5 m.; length of wharf 107 m. the Ocean berth is designed for general cargo vessels, and bulk carriers, of approx. 25,000 – 30,000 d.w.t.

All cargo work is carried out by ship's gear, shore equipment is available, e.g. mobile cranes, side loaders, vacuvators.

SPECIALISED CARGO HANDLING FACILITIES: Oil Jetty capable of handling Palm oil shipment. Liquid chemical installation, present capacity 1,000 tonnes, a further 4,000 tonnes capacity installation under construction. Grain silos, 21,000 tonnes capacity. Fertilizer storage 30,000 tonnes. Proposed timber terminal 15 acres.

STEVEDORES: Stevedoring and shore labour undertaken by the Port Authority. Shift times, 0700–1500, 1500–2300, 2300–0700 hrs.

MEDICAL: Medical service is available from the nearby town of Masai, which is only a short distance from the port. There is a General Hospital situated in Johore Baru to attend to serious cases.

FRESH WATER: Fresh water is available through hydrants installed at frequent intervals on the wharves and the breasting island of the oil jetty. Fire fighting hydrants are installed throughout the port area, using separate fresh water, and sea water systems. Fresh water may also be supplied to vessels in the anchorage if required either by tug, or if large quantities required by water barge from Malaysia Shipyard.

FUEL: Bunkers are available by pipe-line installed along the quay, or alternatively by barges. Bunkering is undertaken by Petronas.

FIRE PRECAUTIONS: The Port Authority maintains a fire and rescue service, with trained firemen responsible for fire fighting on board, and on shore. The brigade is equipped with modern fire fighting appliances, and salvage equipment. Tugs are also equipped with fire fighting equipment, and anti-pollution equipment.

CONSULS: Nearest Consuls are situated in Singapore, and arrangements can be made to obtain Visa to proceed to Singapore to carry out ships business.

REPAIRS/DRYDOCKS: Situated in Pasir Gudang industrial area is Malaysia Shipyard & Engineering Sdn Bhd. MSE is a fully equipped up-to-date engineering establishment, with facilities for ship repairing, new-building up to 12,000 d.w.t. and general engineering works.

(1) Drydock, length 395 m., width 80 m., depth 14 m., capable of handling ships of 400,000 d.w.t.

(2) No. 2 Drydock, length 270 m., width 46 m., depth 12.5 m., capable of handling up to 140,000 d.w.t.

(3) Newbuilding dock, length (approx.) 130 m., width 24 m., depth 8.0 m., capacity approx. 12,000 d.w.t.

Berthage – No. 1 quay, 390 m. long×7 m. draft. 1×15 ton luffing crane.
No. 2 quay, 168 m. long×7 m. draft. 1×15 ton luffing crane.
No. 3 quay, 168 m. long×7 m. draft. 1×15 ton luffing crane.

SURVEYORS: Classification Surveyors are available from Singapore, or Kuala Lumpur.

GANGWAY/DECK WATCHMEN: The Port Authority has a Security Division, responsible for the general security of the port area. The force consists of a detachment of trained armed guards. Their services are available if requested through the Agents.

HATCHES: Preferably all opening/closing to be carried out by ships crew, as the stevedoring labour is inexperienced.

CUSTOMS ALLOWANCE: Spirits 0.125 of a quart per man per day *or* wines 1 quart per man per day; beer 1 quart per man per day; cigarettes 25 in number per man per day *or* cigars 8 in number per man per day *or* tobacco 1 oz. per man per day. Customs will issue allowance for total of 3 days, and at the request of a Proper Customs Officer the seal may be broken for further issues.

CARGO GEAR: When possible all loading and discharging carried out with ships gear. Shore equipment comprises – 1 side loader capacity 52,000 lbs., 5 side loaders of capacity 9,000 lbs. each, 2×28 tonne mobile cranes, and 2×10 tonne mobile cranes. For bulk cargoes, grains, fertilizers, sulphurs, etc. shore grabs of 2 tonne capacity connected to ships gear.

REPATRIATION: Ships crew with valid or recognised International Passports are permitted to enter and sign-off through Malaysia/Singapore checkpoint at Causeway, provided they obtain a transit visa from the Malaysian Authorities through the ships Agent. Ships crew without International Passports, and only Seamens Books must join/leave ships via Kuala Lumpur.

TIME: GMT + 7.5 hrs.

HOLIDAYS: Chinese New Year 28th and 29th January*; Prophet Muhammads Birthday 9th February; Labour Day 1st May; Wesak Day 10th May; Hari Keputeraan D.Y.M.M. Seri Paduka Baginda Yand Di Pertuan Agong 6th June; First Day of Fasting Month 25th July*; Hari Raya Puasa (1399) 24th and 25th August*; Malaysia National Day 31st August; Deepavali 19th October; Hol Almarhom Sultan Ibrahim 20th October; Sultan of Johore's Birthday 28th October; Hari Raya Haji (1399) 31st October*; First Day of Muharran 21st November; Christmas 25th December.

*These dates are subject to alteration.

TELEPHONES: Telephones may be placed on board at a connection charge of $/M25.00 per day.

SERVICES: The Malaysia Shipyard & Engineering Co. has an agreement with the Port of Singapore Authority for the use of a slop barge which may be sent to the Johore Anchorage to receive slops from tankers which are proceeding to MSE for repairs. Numerous other services, and local representation for engineering and marine equipment available from Singapore.

SHORE LEAVE: Shore leave for Crew members is permissible. The nearest town is Masai, approx. 3 miles from the port. Johore Baru is approx. 23.5 miles from the port. Crew members are allowed to cross the causeway into Singapore, providing they obtain the necessary visa from the Immigration Authorities through the ships agent.

DEVELOPMENTS: Johore Port has submitted a plan for the expansion of three more wharves. The proposed berths are for dry bulk materials. The berths are to serve the needs of specialised related industries, such as fertilizers, flour, tapioca, feedmeal, and grains. The construction of silos, storage areas, and other processing plants is to be undertaken.

AUTHORITY: Johore Port Authority.

AGENT: Sri Overa Shipping Services Sdn Bhd., 10K Jalan Chenderawasih, Larkin Jaya, Johore Baru Johor, West Malaysia. Telex: Overas Ma 60751.

Netherlands Antilles

BULLEN BAY:

SHIPMASTER'S REPORT: February 1979.

RESTRICTIONS: Crude oil washing permitted subject to notice below. Tank wash piping must be tested before arrival and oxygen meters calibrated.

HEALTH: As for U.S.A.

VHF: Channel 9 to give notice of readiness and for berthing with Pilot and tugs. Call Agent on Channel 25.

BERTHING: Shore gangway at 2 largest berths.

NOTICE No. 1: Issued by Curacao Oil Terminal (C.O.T.)

Crude Oil Washing

Only tankers equipped with a well constructed inert gas installation and provided with fixed tank washing machines connected to the tank wash piping system by means of fixed steel piping may crude wash cargo tanks under the following conditions:

1. Oxygen content in cargo tank may not exceed 5% (*meters calibrated*).
2. Minimum inert gas pressure in cargo tank to be 250 mm. (10 in./water column) (0.025 hg/sq.cm.=–0.36 lb./sq.in).
3. Continuous supervision by a specifically appointed and experienced operator is mandatory.
4. The "in-line" O^2 analyser must be arranged to allow for calibration during inert gas operation.
5. The hydrants of the tankwash piping must be equipped with screwed-on heads.
6. Tankwash piping must be tested for tightness.
7. Exceed of discharge time will be for ship's account.

For each "crude washing" a request for cleaning must be submitted to the Head Operations of C.O.T.

Please sign for receipt: Curacao Oil Terminal N.V.
Signed.........................

Master
Operation Manager

NOTICE No. 2: Issued by N.V. Curacaosche Scheepvaart Maatschappij. Emmastad, Curacao, N.A.

CUSTOMS REGULATIONS
BONDED STORES

In connection with revised Customs Regulations for the ports of Curacao, we draw your attention to the following:

1. All stores on board of vessel on arrival, also personal effects, must be declared to Customs Officials when clearing in vessel.
2. While ship is in port, Customs Officials may seal bonded stores, e.g. beer, wine, spirits, cigarettes and tobacco.
   When sealing bonded stores, permission may be granted by the Customs Officials, to take out a certain amount of these stores, from the bonded store-room, before sealing the store-room.
3. Stores on board, which are *not* sealed by the Customs Officials, may be used on board vessels, but may not be taken ashore without permission of Customs.
4. All stores ordered in bond at the port of Curacao, MUST REMAIN UNBROACHED, until departure of vessel from Curacao, and it is more likely than not, that Customs Officials will board before departure for control. If bonded stores are found opened up, or missing, Customs will charge import duties, whilst the possibility exists that the ship may be fined for such breach of law.

Nigeria

FORCADOS

SHIPMASTER'S REPORT: February 1979.

DOCUMENTS: Ship's stamp to be on all documents.

5 lists ports of call; 5 arms and ammunition (3 for Agent, 2 for Customs); 4 each of vaccinations; nil passengers; nil stowaways; crew labour list (presumably DBS); 1 copy of diversion cable; 4 lists "Nil" animals or birds.

PILOTAGE: Require accommodation ladder with pilot ladder for large vessels due to swell.

VHF: Channel 8 for all communications with Pilot, Loading Terminal, and Cargo Operations.

BERTHING: Line required aft should preferably be polypropylene or one that floats.

TANKERS: Loading temperature about 99°F, will vary slightly depending on loading rate.

Panama

PUERTO ARMUELLES

SHIPMASTER'S REPORT: February 1979.

DOCUMENTS: Same as for "Almirante", and if no cargo to land at this port, 6 copies of a "Nil" declaration.

PILOTAGE: Arranged through Agent. Pilot and mooring gang board 0.75 miles East of pierhead by port accommodation ladder, from an old ship's lifeboat painted white.

ANCHORAGE: 1 mile East of pierhead in depths of 30 fathoms or more. Bottom is very steep-to, in less depth vessel can be too close to shallow water. Recommend U.S. Chart 21581, 'Ports and Anchorages S. Coast of Panama' be obtained.

RESTRICTIONS: Almost none, depth alongside over 40 ft., breadth is no restriction, berthing face is about 550 ft. long, but vessels up to about 680 ft. long could be berthed, bows projecting from pier.

HEALTH: Pratique given by doctor on arrival. If any suspected disease, vessel should advise Agent by radio beforehand. Meat products which are not usually acceptable to U.S.D.A., are generally sealed up as in U.S. Ports.

RADIO: Balbao Radio.
VHF: Channel 16 for Pilot.
TUGS: None.
BERTHING: Pier about 2,000 ft. long, lies in South-easterly direction from the shore line, vessel berths starboard side alongside on the N.E. face, seaward end.

Three buoys are moored 250/300 ft. off the berth and are used to hold off the pier, the vessel being moored about 10 ft. off at all times due to swell. Port anchor is let go approaching the berth and ship's lines used to position vessel, then very heavy mooring springs are secured, 4 at each end. Ship's lines remain on buoys for holding off. On sailing Pilot does not board, only berthing gang who leave by accommodation ladder to boat after vessel is off the berth.
FUEL: Not available.
FRESH WATER: Piped to pier, ample hydrants, charge U.S. $150.00 irrespective of amount taken.
REPAIRS: Workshop and electrical repairs can be undertaken by arrangement.
FRESH PROVISIONS: Available.
TIME: GMT minus 5 hours.
MEDICAL: All facilities available.
CUSTOMS ALLOWANCE: No restrictions as long as nothing landed, bond is sealed on arrival.
OPENING/CLOSING HATCHES: Ship's crew. For banana loading starboard side elevator hatches only.
SHORE LEAVE: No restrictions.
OPERATORS: Chiriqui Land Company.

Portugal

SINES: 37.57 N. 08.52 W. **(See Plan Book)**

(Port under construction)
LOCATION: 95 miles South of Lisbon.
MAX. SIZE: (December 1978) Only Berth No. 4 available.
DEVELOPMENTS: When construction is completed the following facilities will be available.

Berth No.	*Product Handled*	*Max. size (d.w.t.)*	*Max. draft (m.)*	*Depth (m.)*
1	Crude Oil	500,000*	28.0	37.0
2	Crude Oil	313,000	25.0	28.0
3	Crude/Products	100,000	15.0	18.0
4	Refined Products	100,000	15.0	18.0
5	Refined Products	100,000	15.0	18.0
6	L.P.G.	4,500	—	10.0
7	L.P.G.	4,500	—	10.0
8	Refined products	10,000	—	—

*This berth could be upgraded to 1,000,000 d.w.t. by extending the breakwater.
Planned storage capacity: 2,750,000 cu.m., 1,500,000 cu.m. will be allotted for crude oil.
Discharge Rates: 15,000 cu.m. per hour (crude).
Loading Rates: 4,500 cu.m. per hour for fuel oil and 2,000 cu.m. per hour for other products.
Products Produced: Propane, butane, chemical naptha, regular and premium petrol, jet fuel, kerosene, various grades of diesel and fuel oil, asphalt, residue and sulphur.
Services: Ballast treatment, sonar, fire-fighting.
Petrochemicals: Terminal with 2 berths with depths up to 12 m. will be able to handle vessels with capacity of 20,000 cu.m.
Ore Terminal: In the initial stages 4 berths will be available for simultaneous berthing of vessels of 6,000; 25,000; 45,000 and 150,000 d.w.t. Max. depth (approx.) 18.0 m. Cargo to be handled is iron ore, iron scrap and finished products.

Other facilities will include a general cargo harbour, fertiliser complex, facilities for grain reception and facilities for pyrites treatment.
AUTHORITY: Administracao do Porto De Sines.

Saudi Arabia

JUBAIL

The following report was received in March 1979:

Anchorage: Anchorage for vessels presently situated at the Pilot Boarding Area and bounded by the following co-ordinates:

27° 06.5′ N. : 27° 09.0′ N. : 27° 09.0′ N.
49° 46.0′ E. : 49° 46.0′ E. : 49° 48.5′ E.

	Jubail (Commercial)	**Jubail (Industrial)**
Entrance channel depth at LW:	14 m.	14 m.
Number of stream mooring berths available for ships and depths at LW:	Nil	4 open sea tanker terminals. Depth at LW 28 m.
No. of Quays (alongside berth):	5 Pier Berths 2 Container Berths (as of April '79) (1 Ro-Ro Berth (as of April '79) Combined with Container Berth No. 16	9 (March '79)
Length of each alongside berth:	212-250 m.	212-250 m.
Depth available at each alongside berth at LW:	12-14 m.	14 m.
Equipment:	*Port Authority:* Presently 12 mobile cranes available for the 4 operating berths, details as follows: Cranes: 6 cranes× 20-ton cap. 4 cranes× 50-ton cap. 2 cranes×100-ton cap. 1 Fuel Tanker 1 Fire Truck *Stevedoring Contractors:* 2 forklifts×35-ton cap. 2 forklifts×20-ton cap. 4 forklifts× 6-ton cap. 16 forklifts× 5-ton cap. 20 forklifts× 3-ton cap. More equipment to follow as additional berths turned over to Port Authority.	None, as no operating berth at present.
Floating cranes:	None	None at present
Mooring boats, tugs, etc:	2 Mooring Launches 2 Multi-purpose Launches. 3 Tugboats. More tugs and other marine equipment due as additional berths become operational.	None at present
Transit sheds and cold storage facilities:	2 Sheds (operational) 3 Sheds (for completion April '79)	None
Berthing/Unberthing:	24 hours	Port not operational as yet.
Pilots:	Pilots available and compulsory	
Slipways:	None	1,000 ton slipway
Repair Facilities:	None	None
Classification societies:	None	None
Oil bunkers and coal:	Bunker fuel oil, Marine diesel oil and Marine gas oil. No coal available.	Bunker fuel oil, Marine gas oil. (Dec. '79)
Fresh water:	Limited supplies available. Main supply available end of 1979.	None at present
Fresh and dry provisions:	Limited supply available.	None at present
Ship and engine room stores:	Limited supply available.	Limited supply available
Cargo lighters:	None	None
Medical facilities:	Qualified doctors and medical facilities available.	
Customs requirements:	Usual pre-arrival advice with 5 sets of manifest in English and 4 in Arabic. Vessels may be cleared at the Pilot Boarding Area or when alongside Pier Berths.	
Container Berths: (In Commercial Ports)	Two (2) Container Berths with an overall length of 500 m. are expected to be operational by mid-1979. The minimum depth alongside (at LW) is 14 m. The Container Berths are equipped with 4 container cranes (Portainers): each with a lifting capacity of 41 tons. The hinged boom outreach of the container cranes from the waterside rail is 38 m. and max. height of lift above rails to underside of spreader is 26 m. 5 straddle carriers (Transtrainers) with a lift cap. of 41 tons are also available plus 30 container Terminal Tractors and 40 forklifts. The Container Quay Office is now completed. The container storage area is approximately 130,000 sq.m. An additional 4 straddle carriers (Transtrainers) and buildings will be completed during 1979.	

United States of America

BURNSIDE (St. James)

SHIPMASTER'S REPORT: February 1979.

LOCATION: St. James – West Bank.

DOCUMENTS: Ship's stamp on cash receipts.

ANCHORAGE: Usually at Grandview, where launch service available and about 1 hour's drive to New Orleans.

From Capline (St. James) about 45 minutes drive to Baton Rouge.

VHF: All berthing and river pilotage on Channel 13.

TUGS: 3 tugs recommended.

BERTHING: Always port side to. No shore gangway, moorings 4, 2, 2 each end for tankers of 100,000 d.w.t. and upwards.

CRANES: Not available.

TANKERS: Require ship's gangway at No. 2 berth.

NOTES

NOTES